

AUSTRALIA'S NUMBER ONE ELECTRONICS MAGAZINE

# ELECTRONICS

## AUSTRALIA

Registered by Australia Post — publication No. NBP0240.

FEBRUARY, 1983

AUST \$2.00\* NZ \$2.50



PHONOGRAPHS  
ARE ANTIQUES  
**THE  
COMPACT  
DISC  
IS HERE!**

- **TRANSISTOR-ASSISTED IGNITION SYSTEM**
- **SIMPLE MOISTURE ALARM TO BUILD**
- **THE PERILS OF SPACE DEBRIS**
- **OTRONA PORTABLE COMPUTER REVIEWED**

**BONUS  
48-PAGE  
ALTRONICS  
CATALOG**

# Power you can taste.




Sony's new TA-AX5 amplifier with memory is a high fidelity feast.

Its multiple memory lets you create your own acoustic "flavours." Bass and treble tone settings, turnover frequencies, high and low filter are all programmable.

At a touch you can instantly recall the recipe for bittersweet country, hot 'n' spicy rock, or a well-seasoned Stravinsky. And electronic displays graphically show you everything the amp is cooking up.

Sony's Audio Signal Processor means that every function is touch controlled. This knives through the usual maze of audio circuitry for a streamlined design of the future. Pure and simple, it sounds delicious.

The ideal companion for this tasty new amplifier is Sony's ST-JX4 synthesizer tuner. Why not make a reservation for two?

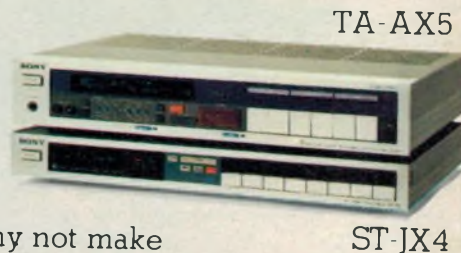

**SONY**  
THE ONE AND ONLY

SON 0118


# ELECTRONICS

## AUSTRALIA

Volume 45, No. 2  
February, 1983

AUSTRALIA'S LARGEST SELLING ELECTRONICS MAGAZINE

### Transistor-assisted ignition

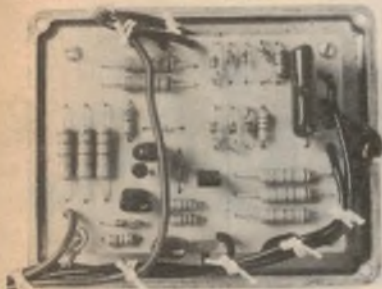

This updated version of our December 1979 Transistor Assisted Ignition System features longer spark duration and an opto-electronic trigger system to replace the points. Details on p44.



Once regarded as an expensive luxury, the Wheatstone bridge can now be built for a quite modest cost, and in much improved form. Full constructional details are on p82.

### On the cover

Contrast in disc technology: our cover this month shows Sony's new compact disc player and a vintage 1907 "Dulciphone". See articles beginning pages 28 and 32 for details of the compact disc. (Dulciphone courtesy of the Museum of Applied Arts and Sciences, Sydney.)

### FEATURES

THE GROWING PERIL OF SPACE DEBRIS <i>Threat to space shuttle</i> . . . . .	12
PROSPECTS FOR CABLE TV <i>Exclusive interview</i> . . . . .	16
ALTRONICS <i>The live wire company from the golden west</i> . . . . .	24
50 & 25 YEARS AGO <i>Thought waves, red hot valves</i> . . . . .	129

### HIFI, VIDEO AND REVIEWS

THE COMPACT DISC <i>For immediate release</i> . . . . .	32
HIFI REVIEW <i>Technics Way; smallest portable player</i> . . . . .	41

### PROJECTS AND CIRCUITS

TRANSISTOR ASSISTED IGNITION SYSTEM <i>With longer spark</i> . . . . .	44
OPTOELECTRONIC TRIGGER <i>Breakerless ignition system</i> . . . . .	56
SIMPLE MOISTURE ALARM <i>Triggers a relay or buzzer</i> . . . . .	58
HIGH PERFORMANCE AM TUNER: PT 3 <i>Tuner alignment kit</i> . . . . .	64
CIRCUIT AND DESIGN IDEAS <i>Suppressed zero voltmeter etc</i> . . . . .	71
REMOTE TV SOUND CONTROL: PT 2 <i>To suit DC volume controls</i> . . . . .	78
WHEATSTONE BRIDGE AND DECADE BOX <i>High accuracy, modest cost</i> . . . . .	82

### PERSONAL COMPUTERS


THE MICROBEE PERSONAL COMPUTER <i>4-page review</i> . . . . .	94
COMPUTING ON THE OTRONA 512 <i>A remarkable portable</i> . . . . .	118
MICROCOMPUTER NEWS <i>Atari looks for new games</i> . . . . .	123

### COLUMNS

FORUM <i>Recording is out of the rut</i> . . . . .	26
SERVICEMAN <i>Catching a set that bounces — with dignity</i> . . . . .	74
THE SHORTWAVE SCENE <i>BBC expansion plans</i> . . . . .	111
RECORD REVIEWS <i>Classical, popular &amp; special interest</i> . . . . .	112

### DEPARTMENTS

EDITORIAL . . . . .	3	NEW PRODUCTS . . . . .	104
NEWS HIGHLIGHTS . . . . .	6	INFORMATION CENTRE . . . . .	131
LETTERS TO THE EDITOR . . . . .	99	MARKETPLACE . . . . .	134
BOOKS AND LITERATURE . . . . .	100	NOTES AND ERRATA . . . . .	133

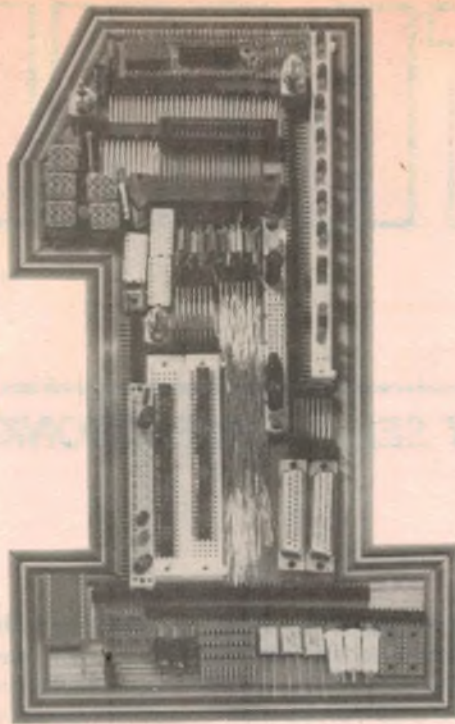

# No.1 for any bits.

*In the electronic component field today, being No. 1 is tough. At the new Ampec Trade Shop, we already have a No. 1 address . . . and No. 1 service and prices . . . and always the*


*No. 1 products. Quite simply, we want to be No. 1 with you. Here are some of our current specials available while stocks last — prices do not include sales tax.*



### Digital Multimeter


3½ digit LCD multimeter with 10 amp range. ME 531 — \$45.00

*These prices while stocks last — sales tax not included.*

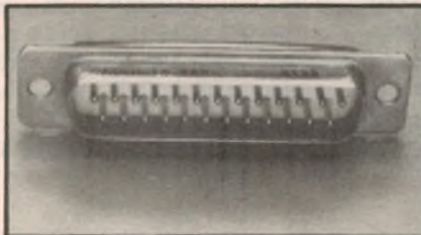

### D Connectors

ADIN — 1S — 25P	\$1.91
ADIN — 1S — 25	\$2.82
ADIN — 1S — 9S	\$2.49
ADIN — 1 — 9P	\$1.89
ADIN — 15S	\$3.51
ADIN — 15P	\$2.52

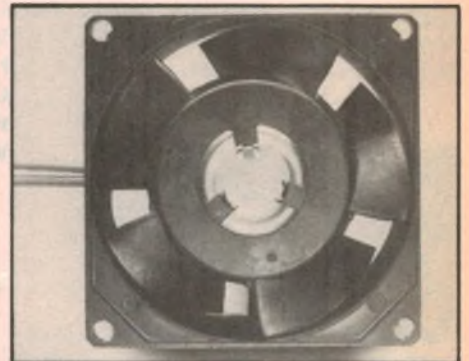

### Fans

4" fan — 240V EP114-38	\$11.00
3" fan — 240V EP 75-38	\$11.00

## The Ampec Trade Shop

*No. 1 Wellington Street, Rozelle, NSW 2039*

*Phone: 818 1166*

**AMPEL**  
The absolute in peripheral thinking.





# Editorial Viewpoint

## The Compact Disc is here!

### EDITOR-IN-CHIEF

Neville Williams  
F.I.R.E.E. (Aust.) (VK2XV)

### EDITOR

Leo Simpson  
B. Bus. (NSWIT)

### ASSISTANT EDITOR

Greg Swain, B.Sc. (Hons. Sydney)

### TECHNICAL PROJECTS

John Clarke, B.E. (Elect. NSWIT)  
Peter Vernon, B.A. L.L.B. (NSW)  
Jeff Skeen  
Colin Dawson

### PRODUCTION

Danny Hooper

### GRAPHICS

Robert Flynn

### SECRETARIAL

Pam Hilliar

### ADVERTISING MANAGER

Selwyn Sayers

### CIRCULATION MANAGER

Alan Parker

This month we have devoted our cover and a substantial amount of editorial to the Digital Audio Disc or, as it is more likely to become known as, the Compact Disc. Our cover juxtaposes a Sony CD player against an historic phonograph to emphasise the great leap in technology that the Compact Disc represents. In fact, the Compact Disc represents the biggest step forward in sound recording since the days of Edison.

No longer are sound waveforms to be recorded as wiggles in the groove of a vinyl disc or as analog variations in magnetic field on tape. From now on, the standard method of recording will involve digital technology. No doubt many refugees from the microprocessor who previously regarded audio as the last bastion of analog circuitry will be horrified, but it is here to stay and it is potentially far better than the sound technology we have revelled in to date.

It is a safe bet that many of the local companies who will be distributing compact disc players do not realise the potential of the CD system. And it will probably be some time before recording engineers utilise this new medium to the best advantage. But even at this early stage it is obvious that the Compact Disc will ultimately wipe out records and tapes as we know them today.

Just imagine a system with no tape hiss, no hum, no surface noise or in fact, virtually no background noise at all. This same system has no wow and flutter, no rumble, no acoustic feedback, no problems with record warp, no tape print-through or any deterioration due to dirt, scratches, stylus or tape head wear. Nor will we have to bother with such problems as anti-skating or hum induction.

Together with all these improvements there is a startling increase in the potential dynamic range. In truth, unless you have heard this system directly, it is just not possible to imagine all the above. And you can discount any previews you may have heard via FM transmissions. Such demonstrations are so severely limited by the FM medium that they are meaningless.

Incidentally, let us dispel a myth before it even has a chance to take hold. The greater available dynamic range will not mean that you have to play music even louder. Most people already play their music too loud. No, the greater dynamic range will mean higher fidelity on those instruments having transients which are presently "crushed" by analog recording and playback.

We predict that within 10 years, or perhaps even sooner, the Compact Disc will completely dominate home and car music systems and you will seldom bother to go back to those "archaic" discs and cassette tapes. It is an exciting future which can be looked forward to with great anticipation.

**Leo Simpson**

### Editorial and Advertising Office

57 Regent St, Chippendale 2008.  
Phone (02) 699 3622 Telex 25027  
Postal Address: PO Box 163, Chippendale,  
2008.  
Advertising Sales Manager: Sel Sayers.

Melbourne — 392 Little Collins St, Melbourne  
3000. Phone (03) 602 3033.  
Representative: Mark Christian.

Adelaide — Charles F. Brown & Associates  
Ltd, 278 Halifax St, Adelaide, 5000.  
Representative: Sandy Shaw (08) 267 4433.

Perth — 454 Murray Street, Perth 6000.  
Representative: Ashley Croft (09) 321 8217.

### Circulation Office

Unit 3B, Sydneygate, Waterloo, 2018.  
Phone (02) 699 2388.

### Subscriptions

Subscription Dept, John Fairfax & Sons Ltd,  
GPO Box 506, Sydney 2001.  
Enquiries: Phone (02) 20944, ext 2589.

### Distribution

Distributed in NSW by Magazine Promotions,  
57 Regent St, Chippendale; in Victoria by  
Magazine Promotions, 392 Little Collins  
Street, Melbourne; in South Australia by  
Magazine Promotions, 101-105 Waymouth St,  
Adelaide; in Western Australia by Magazine  
Promotions, 454 Murray Street, Perth; in  
Queensland by Gordon and Gotch (A'asia) Ltd;  
in Tasmania by Ingle Distributors, 93 Mac-  
quarie St, Hobart; in New Zealand by Gordon  
and Gotch (NZ) Ltd, Adelaide Rd, Wellington.

Registered by Australia Post — publication No.  
NBP0240.

### Copyright. All rights reserved.

Devices or arrangements shown in this magazine may embody patents. Information is furnished without responsibility for its ultimate use, or for failure of equipment to operate as expected, or for any damage, loss or injury which may be sustained. Material intended for publication is submitted at the sender's risk and, while care will be taken, responsibility for any possible loss will not be accepted by "Electronics Australia".

Printed by Magazine Printers Pty Ltd, of Regent Street, Chippendale and Masterprint Pty Ltd of Dubbo NSW for Magazine Promotions, of Regent St, Chippendale.

ISSN 0313-0150

\* Recommended and maximum price only.

# RED HOT SPECIALS

## OVER 500 CERAMICS - 5 BUCKS!!!

Not your Asian rubbish either! Quality made in the USA, military grade units made by Corning. These devices are basically military style CK-12 devices (MIL-C-39012). They are very small, axial and are 10% tolerance. Values are mixed but range from 82pF thru to 0.022uF. They are very stable, long life units that sold in quantities to military contractors for up to 60 cents each. This offer represents outstanding value for you. Hey! Ceramics less than 1 cent each!!!

☆☆☆ \$5

## OVER 100 TANTALUMS - 5 BUCKS!!!

Once again, mil spec devices. Tiny long life and very high quality made in the USA by Corning. We do not have many packs so hurry!! Limit of 2 packs per customer. Once again, less than 5 cents each!!!

☆☆☆ \$5

## EA SOUND PRESSURE LEVEL METER

We have a small quantity of the EA Sound Pressure Level Meter PCB (81Sp5) & the punched Scotchloc front panel to suit. For the month of Feb. only you can have the pair for \$2.95. Normally the PCB alone sells for this.

☆☆ \$2.95

## JUMBO SPAGHETTI PACK

Genuine P.V.C. Spaghetti tubing. Always handy. From 1/8mm I.D. through to 13mm. Over 20m in all!!! Many colours. ONLY \$3.50

## JUMBO HEATSHRINK TUBING PACK

Amazing value. A huge bag of lengths of Heatshrink sleeving. At least 5 different colours in sleeving ranging from 3mm Ø to 32mm Ø. You will probably never need to buy heatshrink again. ONLY \$3.50

You don't think sometimes. We saw these in an obscure part of our warehouse some time ago but did not think much about them. After idly playing with one on his bench one day our technician realised how fantastic they actually were. He'd dreamed of such a component in the past but never really thought that they were made. Basically this all metal device is a stereo 5.5mm (1/4") jack. When a plug is inserted, however TWO SEPARATE single pole single throw switch contacts are opened. The switched contacts are isolated from the signal. Just imagine you can actually turn the appliance on and off simply by plugging in! No need for a separate switch! (Note that the contacts are normally closed and go open when a plug is inserted). Such a component would normally sell for about \$2.95.

## THE ULTIMATE (Limit 5 per customer)

\$100

6.5mm  
SOCKET??



## 4116 RAMs 150ns - GOING CHEAP

We have secured a quantity of 4116 (150ns) RAMs at a price which means great savings to you. Why are they cheap? Well they don't actually have 4116 branded on them. They have 9016 FPC on their little backs. They are used in a well known TV game computer and this is the 'House Number' for their 4116. If you have ever had to buy a non-standard replacement part you will know that the 'House Number' part can be VERY expensive. We don't want to sell them as 9016 FPC's, we want to sell them as 4116's - and at a great price. The normal (i.e. lower than most) price for our 250ns 4116 is \$2.50. You can grab a 9016 FPC (150ns) 1 off for only \$1.95!!! For larger quantities see below.

This price includes sales tax!!



1-9 pcs \$1.95  
10-24 pcs \$1.85  
25-99 pcs \$1.75  
100+ \$1.65

## UGLY MES LAMP BEZELS

We cannot win. At one stage we had thousands of these. We slowly sold them off to manufacturers who somehow or other needed a bright panel mount pilot lamp. You know the lamp we mean. It takes a torch globe & has a glass multi-facet lens that looks like a cheap piece of costume jewellery Kitsch electronics. We recently bought a large consignment of manufacturers stock. You guessed it. We got em back! But at least they didn't cost much. Any redeeming features? Yes, they are well made & you can change the globe from the front panel. \$2 will get you 10 (mixed colours) No other deals.

\$2




## 1/2 KILO CAPACITORS

Staggering. Probably one of the greatest bargains we have seen. Each bag contains: Electrocs, Ceramics, Styros, Greencaps, other plastic capacitors, Micacs etc. We don't even know why we are doing this! No, we aren't giving away two 1950 style electro's at 250g each, it is not a con. You will (on average) get over 200 capacitors! Unfortunately, if you order this on its own we must charge \$2.00 p&p - below cost anyway. Limit 1 per customer.



# LIQUID CRYSTAL DISPLAY



☆☆☆☆☆

LCD's from less than a dollar each!!!

We have over 50 different types of LCD Displays. They range from 10mm high 6 digit displays to 75mm high single alphanumeric in both transmission and reflective styles.

In our January ads we said that we would have a list with each type and a description. Quite frankly, we did not have the time and space to do this. We are going to offer you an even better deal instead. TWO deals in fact.

DEAL 1 - You send \$3.95 (plus p&p) and we send you THREE LCD Displays. That's right, made in the USA high quality displays for around \$1.30 each. You will get 3 different displays. They could be alphanumeric (up to 3" high), dot matrix, or multi-segment numeric or - whatever!! The data manual with pin connections for most types will cost you another 50 cents.

DEAL 2 - You send \$9.95 (plus p&p) and we send you TEN (10) LCD Displays. Some will be the same but most of you will see this as a benefit. You get the connection manual for zilch.

## HIGH QUALITY BARGAIN

# Multimeter



MOVEMENT - 8.7uA super high sensitivity meter  
DC VOLTS - 6 ranges  
0.5 2.5 10 50 250 1000  
Input Resistance - 100k ohms per volt  
Accuracy - 3% of full scale all DC ranges except 1000V - 4%  
AC VOLTS - 5 ranges  
2.5 10 50 250 1000  
Input Resistance - 10k ohms/V  
Accuracy - 4% of full scale all AC ranges  
DC AMPS - 6 ranges  
10u 500u 5m 50m 500m 10A  
Accuracy - 3% of full scale all DC ranges except 10A - 4%  
AC AMPS - 1 range  
10A - 4%  
OHMS - 5 ranges  
RX1 RX10 RX100 RX100k RX10k RX100k (13 ohm mid scale)  
RX1 - 0 1k  
RX10 - 0 10k  
RX100 - 0 1M  
RX1k - 0 10M  
RX10k - 0 100M  
Accuracy - 3% of DC scale with full battery  
FUNCTION SWITCH  
+DC ohms AC -DC, DC A, AC A, (+)V ohm A, ( )COM AC 1kV, DC 1kV, DC & AC 10A  
SIZE WEIGHT  
135(h) x 172(w) x 86(d) 1.27 kg

Incredible value for a high quality Analogue unit. We have secured a small quantity (less than 100) of the "STANDARD" ST-100 HNU Multimeter. This very same unit sells 'trade' for \$72 + tax under a different name. Even if you could get it for \$72 including tax you would be doing well. Our Price? Check the specs first.

# ONLY ~ \$59.95

# THIS MONTH ONLY

## HANIMEX PRINTING CALCULATOR


MASSIVE PRICE BREAKTHROUGH

- Quality Hanimex Brand Model MC 1500P
- 12 Digits, (12 Digit Print Plus D.P. Comma & Two Symbols)
- Seiko Printer
- Uses Standard Plain Paper Rolls (not expensive and hard to get Aluminium coated paper)
- Floating or Fixed Decimal Point
- Selectable % Mode, & most of the usual features found in machines costing well over \$100!!
- A Real Accountant's Special
- Weighs over 3Kg!!
- Roll of Paper Supplied - available virtually everywhere.

★  
*Staggering*  
*Value*  
**\$59.50**



WE ONLY HAVE A SMALL QUANTITY OF THESE UNITS. STRICTLY ONE PER CUSTOMER

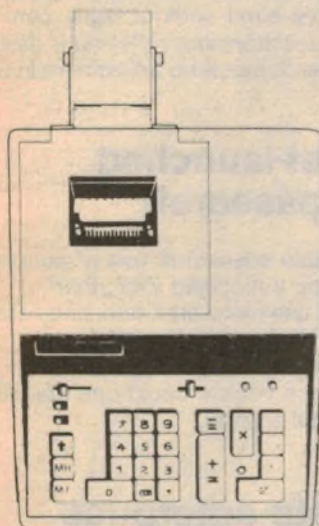

230mm

310mm



★ **NEW**



STAGGERING VALUE

**\$22**

EACH NORMALLY \$24

Motorola twin element, controlled dispersion High Performance Line Source Tweeter, Model KSN1071A.

- Designed for flush mounting. No large holes to bore.
- Less than 19mm deep will fit behind most grille panels.
- Great in hot cars (Guaranteed unaffected at 99 degrees Centigrade!)
- Sensitivity 98dB @ 2.8 volts 1/2 metre
- No need for a cross-over network
- Response 4 - 40kHz (± 3dB)
- Attractive built-in grille.

## 28 pin IC skt.

We're stocked to the rafters with 28 pin IC sockets. What to do? Slash the price to clear them of course!

They are quality sockets made by Robinson Nugent of the USA. Each socket features tapered guides for unaligned pins and is a low profile design. The pins are tin plated. Normally we sell 28 pin sockets for 60 cents each, however for FEBRUARY ONLY you pay only 30 cents each! (Minimum 10 sockets) but there's no limit. So Hurry!!

**30** C each min. 10



## Stop \*\* Press



Disco strobes. 240V Mains powered. Not a kit. Built in a woodgrain (walnut) cabinet measuring 150 x 150 x 120mm. High efficiency wide angle reflector. 0 - 12 flashes per second fully variable. But that is no big deal. The big deal is the price.

NORMALLY \$36.50

BUT because we get desperate in February ONLY \$12.50 each!!


ALMOST 2/3 OFF!!

(Goods are brand new but reworked Q.C. controlled stock) . . . . .

**\$12.50** Normally \$36.50



GE SMOKE & BURGLAR ALARM  
The response to these products has been staggering. As a result we have virtually ran out of stock. If you still want one of these units, ring first, we may still have a few left.



## POT PACKS \*

Guess what? We've made more of these very popular packs.

In EA and ETI August last year we advertised packs of high quality European manufactured potentiometers. They sold quickly and we asked the question at the time "Will pots ever be this cheap again?" Guess what. We've done it. They are now EVEN CHEAPER than August 1982!

FAR CHEAPER IN FACT!!

PACK No. 1 - Last year you got 50 assorted pots in this pack. This year you get over 75 pots for the same price. That works out at around 13 cents a potentiometer!

COST OF PACK - \$9.95  
Sorry p&p on this is \$2.50

PACK No. 2 - This pack was selling fast when it contained 120 assorted pots. NOW it contains 200 potentiometers.

COST OF PACK - \$19.95  
WOW! Less than 10 cents per pot!  
Sorry, p&p \$4.50

NOTE: Each pack contains the same style of pot which includes: Single gang, dual gang, switched, unswitched, in log and linear. All pots have plain shafts to take grub screw knob and most have a flat on the shaft. They have either PCB or solder eyelet terminals. They are brand new stock.



## Jaycar NUMBER 1 FOR KITS

125 YORK STREET, SYDNEY 2000  
PHONE 254 6688 TELEX 72293

"NEVILLES CORNER"  
Cnr. CARLINGFORD & PENNANT HILLS ROAD,  
CARLINGFORD

PHONE 872 4422 or 872 4444

MAIL ORDERS TO: BOX 8, 29 HAYMARKET, SYDNEY 2000

POST AND PACKING CHARGES:  
25 - 39.99 \$1.50 \$1.00 \$1.50 \$1.20  
35 - 54.99 \$4.50 \$3.00 \$4.50 \$3.50  
55.00 or more \$5.00

For all special orders,  
call 02 254 6688  
9.00 am to 12.00 am  
Closed on public holidays

Mail Order By **BANKCARD**  
Via Your Phone





# News Highlights

## Home satellite receivers for \$600, says Toshiba

Affordable home satellite receivers for the United States market are on the way from several Japanese companies. Toshiba Corporation has announced one such receiver boasting breakthroughs in cost and performance which should bring the price down to around \$600 in production quantities.

In the United States, eight companies have already obtained approval from the Federal Communications Commission for direct broadcasting satellite (DBS) services, and at least some hope to start transmissions by the end of the year. Toshiba's prototype receiver and others from several Japanese companies are


poised to open up a new large-scale market for DBS hardware.

The Toshiba home satellite receiver can accept video, facsimile transmissions, high-definition TV signals, digital audio, data transmissions and videotex signals. A compact unit is made possible because the signals will be transmitted at higher frequencies than conventional satellite communications.

The 12GHz signals used by DBS and the US Fixed Satellite subscription service require a dish antenna just one metre in diameter, rather than the four or five metre antennas of conventional satellite terminals.

Toshiba's trial model receiver has a small parabolic dish antenna with a low noise amplifier and down-converter fixed behind the dish. The indoor unit is about the size of an FM tuner and is used to select channels.

Reductions in the cost of the system have been made possible by replacing complex waveguides with a newly designed helix of copper-coated iron, the use of gallium arsenide monolithic amplifiers, and a proprietary surface-acoustic wave filter in the tuner unit. The filter can eliminate noise outside a given frequency band without using conventional capacitors and coils and is designed so that it needs no adjustment in use.

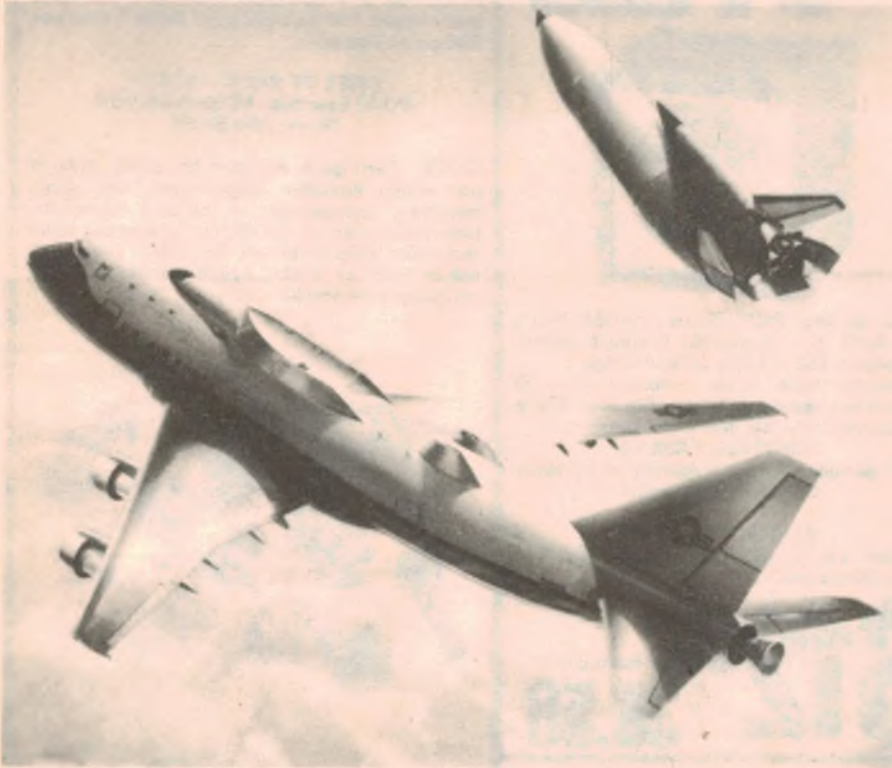

## ◀ Jet-launched spacecraft

A reusable spacecraft that is launched from atop a modified 747, then propels itself into orbit and lands like a glider? It's feasible by 1988, according to the Boeing company. The space vehicle could operate with or without a crew.

## Private enterprise space shuttle

With potential profits looming large, private enterprise in America is making a bid for its own space shuttle. At least that's the goal of Princeton, New Jersey, economist Dr Klaus Heiss, who claims to have raised \$1000 million from private backers for a fifth shuttle to add to the US government's planned fleet of four.

NASA, in fact, says that it wants a fifth shuttle craft, but White House budgetary restraints have all but ruled out the idea. Heiss proposes that his Space Transportation Company (Spacetrans) would buy a shuttle from its maker, the Rockwell Corporation, and then lease it back to NASA. Spacetrans's customers would pay the company for putting payloads into space, while Spacetrans would pay NASA for the cost of the launch and other support costs.

NASA is reported to be considering the proposal seriously.

## MICROCHIP FM RADIO

Readers should be on the look out for the first FM radio in a pencil, cigarette lighter or elegant watch following the European release by Philips of a single integrated circuit that combines almost all the functions of an FM tuner.

Measuring just 3.5 square millimetres, the new chip requires just a few external

components — a resonant circuit, a power amplifier, and a loudspeaker or earphone. Power consumption of the chip is 9mA at six volts.

The chip will be produced at Philips' bipolar circuit factory in Hamburg, West Germany, and will be made available in both 18-pin dual-in-line and a 16-pin microminiature package. Volume quantities should begin to roll off the production lines this month.





**WINDMILL REVOLUTION:** This new concept in windmills could revolutionise wind-powered water pumping. It was developed by Mr Ken Cobden of Mildura, Victoria, and looks more like a jet engine than a windmill. Claimed advantages over conventional fan-bladed designs include greater power output, lower noise, and the ability to operate at extremely low wind speeds.

Cobden Wind Turbines Pty Ltd, Mildura, began manufacturing the new "wind turbines" on July 5th last year, and more than 70 orders have already been received.

## New IC beats copyright pirates

CBS Records of the United States claims to have the answer to home copying and tapes — but whether it can be made to stick is another matter.

The device is an integrated circuit which would be built into all new cassette recorders to switch off the recorder when it detects a signal encoded on an LP or pre-recorded cassette. Obviously the device is a long-term solution; apart from the existing cassette recorders without the device, international co-operation and legislation would be required to force manufacturers to use the chip.

British commentators who witnessed demonstrations of the technique agree that it works, but point out that the chances of achieving legislation to force manufacturers to use the device were "pretty slim".

According to British reports the main use of the device may be as a "bargaining point" to back up the recording industry's claims for a levy on blank tape. Losses due to home copying are said to be around \$A600 million a year in the UK alone.

## Emergency aid for the disabled

"The Companion that will never start an argument" is how Vitalcall is publicising its new home alarm system. The "Companion" alarm is a close relative of "Vitalcall", a personal emergency system for the elderly and disabled.

Vitalcall summons help over the telephone when its portable transmitter unit is activated. Companion is cheaper, and does not use the phone, so there are no continuing costs except battery replacement. Like Vitalcall, Companion is intended to summon help in an emergency in response to pressure on a lightweight plastic pendant which contains a transmitter.

When the button on the pendant is pressed by the user, a signal is sent to the Companion unit which can be situated up to 200 metres away, perhaps in the home of a neighbour or friend. The signal triggers an alarm siren within the main unit which continues to sound until it is cancelled.



Each Companion unit uses a separate code, so the risk of interference between nearby devices is minimised.

Cost of the unit is quoted \$195 and further details are available from Vitalcall offices in all capital cities.

## Arms race spreads to microwave weapons

According to a recent report in the British magazine "New Scientist", the US Army is looking at the possibility of building microwave weapons to disable electronic equipment.

The plan follows concern that the USSR may already be designing its own microwave beam weapons, and follows a US Department of Defence warning that Russian work on very high peak-power generators "gives rise to suspicions of possible weapons intent".

The new weapons would work by disabling sensors in circuits by overwhelming them with electromagnetic noise — at least that's the general idea.

For the time being, however, the main thrust of the Pentagon's work in this area will be to determine if microwaves can cause enough damage to be useful.

Assessments in this area will not be easy, though, since damage will depend on the amount of shielding and other countermeasures employed by weapons designers.

Practical weapons are, however, still far into the future, with the microwave program far behind the Pentagon's work on particle beam and high energy laser weapons. The goal of that program is a weapon in space that could serve as a defence against ballistic missiles.

## High-power 1GHz field effect transistors

Field-effect transistors (FETs) able to produce tens of watts of power at frequencies in the gigahertz range should be available shortly. Present FET devices are limited to frequencies measured in hundreds of megahertz, but one US company, Acrian Inc, is ready to go into production with higher frequency devices.

According to Acrian marketing vice-president Mike Mallinger, a newly developed process will allow the company to build power FETs "that put out 50 to 100 watts (continuous wave) in the 500MHz to 1GHz range in the near future, with 150W at 1GHz not far off".

At present, the only power transistors able to operate at these microwave fre-

quencies are bipolar devices, which have limitations. Most serious is the bipolar transistors' tendency to thermal runaway. The hotter the transistors become, the more they conduct, dissipating more power and heating them further until they are forced beyond safe operating limits.

FETs, however, have a negative temperature coefficient, conducting less as the temperature rises and avoiding thermal runaway.

Acrian's patented "Isofet" process has already yielded transistors which deliver 100W of pulsed power at 1GHz with a gain of 15dB, able to replace bipolar devices in radar, communications and electronic warfare applications.

# What's new in robotics?

Toshiba Corporation of Japan has developed a multi-jointed robot arm said to be ideal for inspection and maintenance in complex and dangerous environments such as nuclear power plants.

The remotely controlled robot consists of eight arm segments, each with a universal joint. Touch sensors are mounted on each segment of the arm, and the tip carries a television camera. Total length is 225cm.

An integral part of the system is the software, called SAS, for "Self Approach System". Toshiba engineers believe that the range of movements possible in the

arm make it too complex to be controlled by a human being without the assistance of a computer. The specially developed control program allows an operator to avoid obstacles in a confined environment and guides the inspection camera easily to any point.

The robot can move automatically in any direction along winding channels or tubes and reach around barriers. If required, the arm can be combined with an automatic vehicle, crane or hoist to enable it to cover a larger area, as in a power station.

Chief motivation for the development, according to Toshiba, is the urgent need



to reduce down-time, and radiation exposure of maintenance technicians in nuclear power plants and reprocessing facilities. It is expected that the robot will be on the market by 1985.

## How not to charge the patient

The increasing amount of electrically operated equipment in hospitals poses a new range of hazards and a number of accidents involving patients and operators have been reported in Australia.

Most accidents result from equipment which fails to comply with relevant safety standards, while others have been caused by the lack of proper precautions in the use of electrical equipment.

An answer is on the way, however, in the form of a new Australian standard: AS 2500, "Guide to safe use of electricity in patient care". The standard has been developed by an expert committee made up of representatives from the medical, nursing, manufacturing, engineering and biomedical professions.

AS 2500 emphasises the need for awareness of the various hazards encountered in health care institutions and contains specific guidelines for the safe use of electrically operated medical equipment.

While in the past more attention has been paid to the physical aspects of equipment and wiring, the new standard emphasises that the safety of patients and operators is equally dependent on the proper maintenance of equipment, and adequate education of staff.

The Standards Association report is intended for use by hospital administrators, doctors and nurses, engineers and all others concerned with the application of electrical equipment in health care.

## New European broadcasting standard?

An Independent Broadcasting Authority proposal for a direct broadcast satellite standard for the United Kingdom may win out over the BBC's proposed "Extended PAL" system.

The UK government's technical advisory panel has recommended the adoption of the IBA's "multiplexed analog component" (MAC) system and its type C audio system, in which digitally encoded sound is transmitted during the line-blanking interval. The system resolves incompatibilities between the PAL system used in the UK and the French SECAM system, a major point in any European standard for direct broadcast satellite television.

## Canadians examine the "information revolution"

A Canadian government task force has recently produced a report on how the "information revolution" will affect workers, and makes a number of interesting recommendations.

Issued by Labour Canada, the Canadian ministry of labour, the "Report on Microelectronics and Employment" suggests that increasing use of computers will bring benefits, but that pitfalls and social upheaval may result from introduction of new technology.

The task force suggests that there will be problems "generating enough new employment to compensate for possible short-term job displacements". Many of the jobs created by automation will require skills which are not possessed by the workers who

are made redundant, says the report.

Women, who now carry out the majority of information related tasks, will be especially affected by office automation. According to the report, "women are particularly vulnerable because they are clustered in a few jobs such as clerical, sales and service positions which are the main targets of office automation".


To prepare for these social changes the report recommends the creation of a national "Centre for Technology, Work and Human Priorities" which would focus on job creation, monitor the effects of computerisation and publicise research work.

Concerning the fears voiced by many workers on the health effects of video display terminals (VDTs), the

report stated: "currently the gravest worry is that radiation from VDTs is the cause of an unusually high incidence of miscarriages and/or children with birth deformities born to women who during pregnancy worked with VDTs".

Although the task force found no data suggesting a basis for such fears, it suggests that employers take precautions until further research is carried out. The task force suggested that pregnant VDT operators be allowed to take other positions, not involving the use of VDTs, without loss of pay, seniority or work benefits.

Electronic monitoring of an employee's work (such as computer checking of the productivity of a VDT operator) should be prohibited, according to the task force, "as inconsistent with human rights".

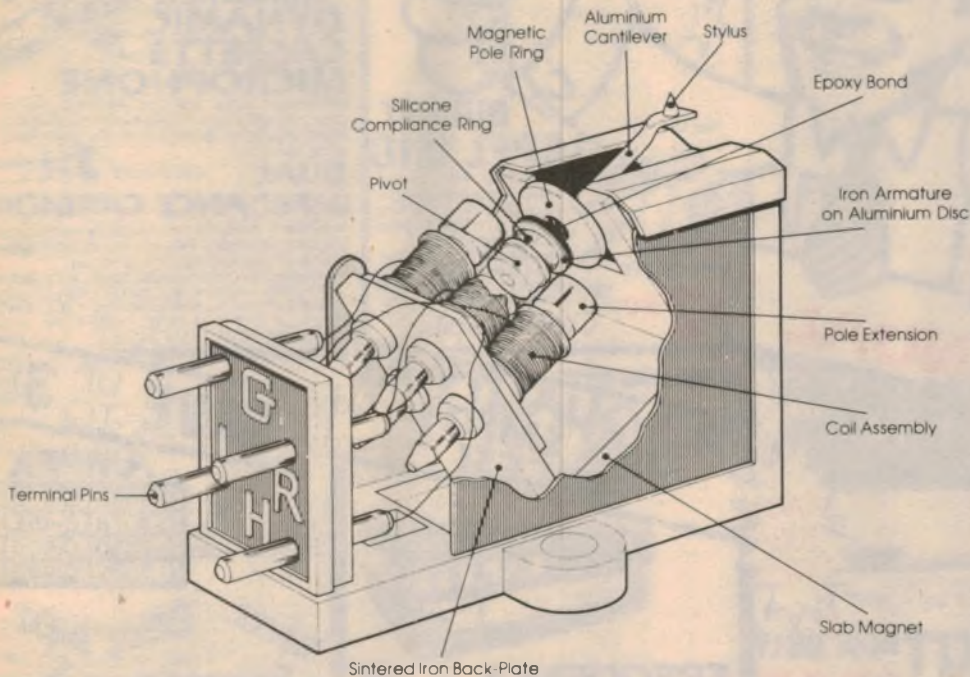

## YOUR NEW CARTRIDGE

Precision □ Value □ Superb Sound  
It all comes together in a **GRADO....**

Get a **GRADO** into your system – and discover why some of the world's most respected audiophiles use and recommend **GRADO**.

Every **GRADO** cartridge, from the economy GTE+ at just \$27.50 to the magnificent Signature V, offers that unique **GRADO** clarity and definition.

Every **GRADO** features a unique stylus assembly – giving the rigidity found in fixed-stylus designs. But you can replace the stylus yourself, in seconds; no need for time consuming arm alignment!

**GRADO's** medium compliance (15 c.u.) and tolerance of widely-varying amplifier loading, makes at least one cartridge in the range suitable for your system. Check which one with your **GRADO** dealer – he'll be delighted to make a recommendation.

READ WHAT DELIGHTED **GRADO** USERS HAVE TO SAY:

"Best improvement I have ever made to my system. Beats '1\*?' (expensive very highly regarded moving-iron cartridge) hands down..." J.C. THORPE CAMBERWELL VIC (G1+)

"Excellent top end and stereo image, very smooth. A jolly good cartridge, what!!!!" TOM BERTULETT WHYALLA SA (G1+)

"... it's the music lover's cartridge!" WILLIAM A. JOHNSTON REDCLIFFE QLD (G2+)

"... the best pickup out of all I have used and they are many. A joy to use!" PAUL WEINEL ELIZABETH FIELD WA (G1+)

**AUDIO 2000**

**AUDIO 2000**

P.O. Box 107, Brookvale 2100. Phone (02) 939-2159.

Please send me further information on GRADO

NAME

ADDRESS

Postcode

Sex (G1)

# THE DIRECT IMPORTER

# SAVES



Cat C-1010

## BUDGET LAPEL MIC

A popular high impedance crystal mic. Ideal for valve amplifiers. It's long lasting & rugged, great for experimenters. Specifications: Omni directional pattern • Frequency response 200-8000Hz • Impedance 250k-1m ohms.

VALUE AT **\$2.50**

Crystal Insert

## WE'VE GOT A MIC VALUE AMAZING DYNAMIC CASSETTE MICROPHONE

Extremely useful low cost dynamic mic for your cassette player. Comes with dual plugs for signal input plus record switch. For low impedance cassettes. **\$4.95**

## DUAL IMPEDANCE CARDIOID

A dynamic cardioid mic ruggedly constructed. Great for bands and PA work. Its cardioid pattern makes it less sensitive to rear noise. Specifications: • Impedance 600ohms and 50kohms • Frequency response 60-15000Hz • Sensitivity -73db(600ohms) & -54db(50kohms) • Also On/off switch • 6 meters of cable • plug & mic holder included. A POPULAR CHOICE **\$31**

## FREE MANUAL

## WITH THE EVER POPULAR SUPER 80 COMPUTER KIT

(all options fitted on illustration) Cat K-3600

OVER 2000 SOLD

**\$245**

SUPER 80 TECHNICAL MANUAL

All the information of the 'works' available for all Super 80 builders. (B-3600) WAS \$9.50 NOW FREE WITH SUPER 80 PURCHASE

### OPTIONAL EXTRAS

BASIC in EPROM (K-3604)\$50.75 • IC Socket Set (K-3603)\$13.25 • Lower Case Generator (K-3607)\$50.50 • S-100 Expansion Unit (K-3606)\$21.00 • Metal Case (H-3200)\$41.25 • Debug/Des assembler for Super 80 (X-3790)\$29.50 • Editor-Assembler for Super 80 (X-3791)\$29.50

## PRO QUALITY AT DICK SMITH PRICES!



Cat Q-1300

## FREQUENCY COUNTER

This American developed - 9 digit 600MHz Frequency Counter is a top quality instrument with more features and better accuracy than any other comparable unit and it costs far less! Features: • 9 digit resolution for more precise readings • Excellent 30mV sensitivity up to 600MHz • 3 switch selectable gate times • 10MHz crystal controlled time base for greater accuracy • 2 separate inputs for added versatility • Front panel sensitivity control.

AMAZING VALUE **\$199.00**



Cat Q-1225

## FUNCTION GENERATOR

Get the accuracy & performance you can rely on every time with this low cost Function Generator.

Features: wide 1Hz to 200kHz frequency range • Sine, square, triangle and separate TTL square wave output • Continuously variable output to 10V P-P • Frequency sweepable over 100:1 range • Short circuit proof outputs • Vernier frequency dial with fine adjustment control.

VALUE AT **\$175.00**

## SAVE UP TO 38% TOP NAME AMPEX TAPE

SCOOP PURCHASE

C-3088	C-90EDR	\$2.99
C-3078	C-45ELN	\$1.50
C-3080	C-60ELN	\$1.99
C-3082	C-90ELN	\$2.49



NO PRICE RISE DESPITE NEW 7.5% SALES TAX INCREASE!

## THE DICK SMITH SOLDER STATION

Compare our soldering station with others. Ours features variable temp. control (200-500 Celsius) with temp. meter. And its fully approved by the Energy Authority. Comes with iron, holder, sponge & manual.



Cat T-2000

**\$65.00** WHY PAY MORE

## STAINLESS STEEL ECONOMY PRICE

QUALITY STAINLESS STEEL

**\$7.75** each



Resists Rust, Spring Loaded Return, Insulated Easy Grasp Hand Grips.

**Transistor Nipper** Ideal for PCB work. Long Life Cutting Edge. Cat T-3205

**Mini Flat Nose Plier** Great for those Small Nuts Cat T-3325

**Mini Needle Nose Plier** Ideal for Small Components, Confined Places. Cat T-3570

**Mini Long Nose Plier** Long Reach in a small Plier. Cat T-3565

## AMAZING SORCERER OFFER!

Cat X-3002



LIMITED STOCK!

BUY THE SORCERER COMPUTER FOR **ONLY \$1195**

WAS \$1395.00

PLUS ANY FOUR PROGRAMS FROM THIS LIST

AND GET THIS MONITOR FOR \$10.00



If bought separately **\$149.00**

SAVE UP TO \$430

	NORMALLY
*Some stocks limited	
X-3601 Airtraffic Controller	\$17.95
X-3606 Touch Type	\$24.50
X-3607 Basic Tutor Pack	\$17.95
X-3608 Machine Code Tutor	\$22.95
X-3614 Grotnic Wars	\$22.50
X-3616 Galaxians	\$17.95
X-3620 Magic Maze	\$15.95
X-3624 Tape Debug	\$24.50
X-3626 Martian Invaders	\$17.95
X-3627 Nike II	\$17.95
X-3628 Tank Trap	\$24.95
X-3631 Graphics	\$17.95

## AIRCRAFT TYPE MIC/EARPHONE HEADSET

Great when you need to hear and talk, and have your hands free at the same time. Comes with long lead & push to talk switch box. Headphone: 8ohms, mic: 600ohms. TRUE VALUE AT **\$34.00**



Cat C-1120

# YOU \$\$\$

**FOR YOU!!**



**PRO QUALITY DYNAMIC MIC**

Heavy pro quality designed for the professional user - vocal, PA, etc. Complete with 7m cable fitted with Cannon-type connector & 6.5mm plug, comes in quality storage cabinet - 77dB sensitivity, 50-15kHz frequency response. Cat C-1050

**\$56.50**

**SHOTGUN Electret Mic**

Similar to those used by TV studios - very directional plus the long 'shotgun' type tube enables you to point this mic at the subject to be recorded without too many worries about rear interference. It comes complete with a wind shield and 6 metres of cord. Cat C-1069

**ONLY \$76.50**



Comes complete with tie-clasp and 6 metres of cord & phono plug. Cat C-1060

**\$12.50**  
WAS \$18.50




**FM WIRELESS MICROPHONE**  
Superb omnidirectional FM wireless mic puts out an FM signal that can be picked up by any tuner or radio having FM. Cat C-1073

**\$26.50**



LOOK! 'NO HANDS' TWO WAY RADIO



**THE AMAZING DICK SMITH HEADSET TRANSCEIVER**

- ★ Construction workers
- ★ Sportsman/Trainers

Think of the uses! Whenever local area 'hands free' communication is required, the headset transceiver is the answer! No licence needed - voice operated, so you can forget it's on. All you do is talk! Comfortable, too! Cat D-1150

Complies with DOC specification RMF E006 and does not require a licence to operate.

**ONLY \$89.95**

EXCLUSIVELY FOR DICK SMITH ELECTRONICS

**AUSTRALIA'S LOWEST PRICED COLOUR COMPUTER**



That's the **VIC 20** From Dick Smith

Colour Graphics, Sound and more for under \$300! This remarkable breakthrough in computer technology represents outstanding value for money. And you don't have to know anything about electronics or computer programming to enjoy the advantages of the Vic 20 Colour Computer. Anyone can operate it with ease and confidence. It's ready to use as soon as you turn it on. Cat X-2000

WAS \$399.00

**NOW ONLY \$299.00**


**SAVE \$100**



**SAVE WITH QUALITY DICK SMITH TAPES**

Why pay through the nose for those 'name' EDR tapes? Dick Smith EDR tapes are the highest quality, at the lowest prices! Cat C-3354

WAS \$2.75  
**NOW \$1.99 ONLY** each




**STORE 'EM SAFELY**

Deluxe vinyl cassette case protects up to 10 cassettes - ideal for the sound enthusiast on the move. Cat C-3810

**ONLY \$4.45**

YOU REAP THE BENEFIT!



**DON'T PAY A FORTUNE TO LOOK AFTER YOUR HI FI**

**SUMMIT CASSETTE HEAD CLEANER**  
Restore your tape deck's heads to tip-top condition. Get that new sound again! Cat C-7080

**ONLY 99¢**



**VOLUME CONTROL**  
Built-in volume controls for both left & right channels. A great set of phones at a low economy price. Cat C-4103

**AMAZING VALUE \$17.50**



**MYLAR**  
For less than \$5 you'll get a pair of headphones that are a delight to listen to. Light-weight and comfortable. Cat C-4101

WAS \$6.25  
**ONLY \$4.95**

**STEREO HEADPHONES**

WAS \$6.25  
**ONLY \$4.95**

**WEATHER-PROOF SPEAKERS**  
AMAZING VALUE!



**REFLEX HORN**

Superior quality, 15 watts, 8 ohms impedance & frequency response of 300 - 5kHz. Cat C-2718

**ONLY \$26.50**



**HORN SPEAKER**

Ideal for PA work, burglar alarms etc. Ideal for outside work because of the weatherproof nature of the horn. 5 watts. Cat C-2705

**VALUE AT \$10.25**

**MAKE UP YOUR OWN SYSTEM SUPERB SPEAKERS SUPERB VALUE!**

**200mm Dual Cone with Dual Impedance**

An ideal speaker for the smaller enclosures or PA work. You can even wire them in series and parallel for the really big PA jobs! Cat C-2012

**ONLY \$12.95**

**300mm WOOFER**

Features: 8 ohms impedance, 80 watts maximum power handling and acoustic suspension design driver. Cat C-2022

**AMAZING VALUE \$44.95**

**125mm MIDRANGE**

A very smooth midrange speaker for the quality conscious. Rear of the speaker enclosed so there is no need for separate midrange enclosure in the cabinet. This unit can handle high power.

Cat C-2028 **VALUE AT \$15.50**

**64mm TWEETER**

This superb tweeter features an aluminum dome directly over the voice coil to diffuse high frequencies. A stiff curvilinear transducer handles lower frequencies. Cat C-2032

**SOUND VALUE \$10.95**

**200mm AIR SUSPENSION**

With Aluminum Voice Coil and 30 watts rating. Dual impedance of 4 and 8 ohms for almost any requirement. Cat C-2100

**GREAT VALUE \$22.95**

**MINI SPEAKER BIG VALUE!**

This fantastic low cost speaker has many uses for the hobbyist, experimenter etc. etc. Cat C-2222

**\$1.99**

**SAVE HEAPS ON A SPEAKER SYSTEM**

Famous Playmaster quality kits at drastically reduced prices!!!

**8" 3 Way Speakers**  
Save a bundle (while stocks last) on these easy to build Playmaster Hi Fi Speakers with 'wrap-around' enclosure kit, quality speakers, crossovers and acoustically transparent foam grills. Cat C-2046

**SAVE \$72.50**

**10" 3 Way Speakers**  
Same deal - save heaps (while stocks last) on this brilliant 10" system. Very similar to the 8", but is the ideal system where greater volume is required for the larger room. Cat C-2044 & C-2624

**SAVE \$35.00** WAS \$234

**\$199 PER PAIR**

**HURRY - LIMITED STORE STOCK**

**DICK SMITH ELECTRONICS**  
SEE PAGE 98 FOR FULL ADDRESS DETAILS.



# THE GROWING PERIL OF SPACE DEBRIS!

*Unwanted space debris is posing a growing threat to satellites and to the Space Shuttle. On the evidence available, one Russian satellite has already been destroyed.*

by JIM SCHEFTER

**H**ANGING LIKE a fishing float in a still pond, the Russian navigation satellite Cosmos 1275 swept quietly through empty space in the last moments of its short existence.

Shortly after launch on June 4, 1981, it had become operational. Now, 50 days later, routinely circling in its near-polar orbit 960km high, Cosmos 1275 sliced across the arctic tundra over northern Alaska.

Then came the unthinkable. Experts suspect that a nearly invisible shard of metal flashed from the void. The explosive impact shredded Cosmos 1275. In a fraction of a second on July 24, 1981, a working spacecraft turned into more than 140 pieces of orbiting junk.

The Kessler Syndrome — a moving layer of space garbage whose flotsam can lead to disastrous collisions in orbit — had almost certainly claimed its most significant victim.

"It's speculation because no one could see it happen," a West Coast expert in the field, who also described the craft's probable shape, told me. "But of possible collisions in the past, this one is the strongest candidate.

"We think it was a gravity-gradient satellite with no thrusters or fuel tanks on board. (A gravity-gradient spacecraft orients itself by responding to changes in gravity. The Russians have never released technical details on their navigation satellites.) Its mission was navigation, so it carried nothing that could explode. And it was working normally until something happened that broke it apart."

Another expert who analysed the trajectory data agreed. "There is a good possibility that it was a collision, not a simple explosion," he said. Both investigators asked not to be identified; even though the details of the Cosmos 1275 incident are not secret, other elements of their work are classified.

That event is just one in 1981 that is helping to feed a new and growing concern about debris in space. Both NASA and the US military now have active investigations into the hazards of accumulating space debris. The potential threat to the space shuttle, large space platforms of the future, and smaller satellites now in orbit will only get worse.

To get the story about this mounting problem, I talked to experts at Johnson Space Centre in Houston, the North American Aerospace Defence Command (NORAD) in Colorado Springs, the Air Force Space Division and the Aerospace Corporation, both in El Segundo, California, and others. Here's what they told me:

- Nearly 5000 orbiting objects, ranging in size from a few centimetres to complete spacecraft and rocket bodies, are catalogued and tracked by NORAD. More than half of those objects are debris from explosions. Others are protective clamshell shrouds ejected from payloads, pieces that have torn away from tumbling satellites, objects ejected deliberately, and unknown items suddenly "spawned" from other objects. A new report says that another 5000 untracked, but still dangerous, objects are in orbit.

- More than 70 explosions or "fragmentations" have occurred in space since 1960. Some were deliberate, including 19 Russian anti-satellite tests. But most weren't. Of these, 10 were derelict US Delta rocket second stages, some exploding nearly three years after completing their missions. At least seven explosions of all types occurred in 1981 alone.

- Collisions are increasingly probable. Two other Russian craft may have spawned pieces from collisions, but the evidence is circumstantial. A deflated US communications reflector balloon named PAGEOS probably was fragmented by collision in July 1975, but, again, absolute evidence is lacking.


- Near misses (objects passing within 50km of each other) are increasing. At least two satellites were put under special watch in 1981 when NORAD radar data predicted closest approach by debris to be less than 900 metres. At geosynchronous altitudes alone (35,000km) there were 120 near misses in the last six months of 1981. Two active communications satellites passed within 10km of each other in April 1980.

- Microscopic fragments of junk also orbit the Earth. Pits found in Apollo spacecraft windows and a Skylab window brought home for analysis showed traces of aluminium that could only have come from a manufactured item. The finding causes concern for future instruments, such as large telescopes, whose optics could be degraded.

- Improvements in tracking and surveillance are needed. A new NORAD high-quality optical surveillance system will be operating soon, and NASA is studying an orbiting sensor system that could become a "picket fence" in space.

"We've created a debris belt in orbit around the Earth," astrophysicist Don Kessler of Johnson Space Centre in Houston told me. His pioneering studies laid the foundation for most current work in the field.

"People used to contend that space is self-cleansing," he

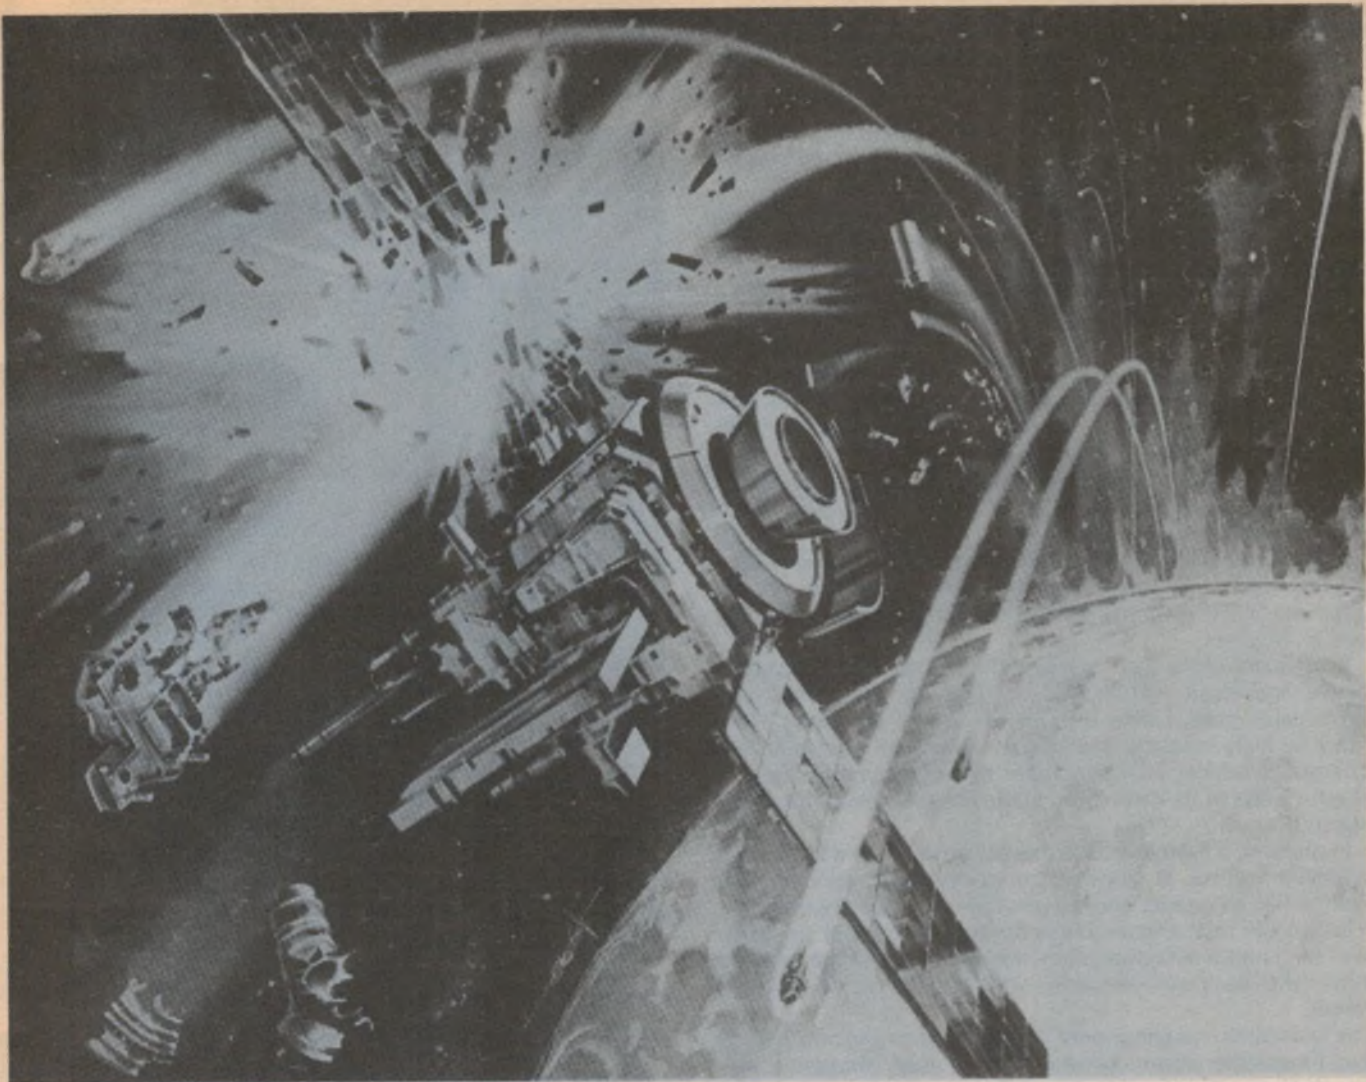

*In this artist's conception, a future space satellite is shattered by a hail of lethal space junk.*

explained. "In fact, the low-altitude particles do decay into the atmosphere, but they're constantly replaced by particles from higher altitudes.

"There's a rain-down effect of debris in orbit."

That effect is unofficially dubbed the Kessler Syndrome by the growing number of experts concerned about the hazard. Even the conservative American Institute of Astronautics and Aeronautics recently issued a strongly worded paper on space debris, urging immediate action on several fronts before the problem becomes unmanageable.

The Delta rocket explosions already were being examined. Engineering detective work at the McDonnell Douglas Astronautics plant in Huntington Beach, California, where Delta is built, traced the probable cause to the common bulkhead between the hypergolic fuel and the oxidiser. (Hypergolic fuel ignites spontaneously on contact.) A 100kPa pressure difference could rupture the bulkhead.

In a typical mission, the Delta vent valves were closed after a payload was deployed. Floating derelict in and out of sunlight could cause pressures to build up until the bulkhead blew, as one did on January 27, 1981, over Edith Range Land, Antarctica. That Delta had been in space nearly three years; others exploded in as little as a day.

Once the problem was isolated, McDonnell Douglas knew what to do. "We changed the software to move the stage away from its payload, then fire the engine until it burns to depletion," said Delta Program Manager Louis Rayburn. "Then we left the valves open to vent any residual propellant."

It seems to have worked. Recent Deltas have not blown. But some older stages still in orbit may yet contribute to the growing volume of debris.

"Most of the Delta explosions come in the 1500km altitude range," Kessler said. "There's a peak in the debris concentration there and that's the source of a lot of stuff raining down to lower altitudes."

Another and heavier debris concentration is found about 800km up, according to Vladimir A. Chobotov, manager of the Space Hazards Office at the Aerospace Corporation. Much

### What's in orbit

Natural and man-made objects in space include the following:

- Planets, moons, asteroids, meteoroids, and other natural bodies.
- Operational payloads.
- Nonfunctional mission-related objects, such as rockets and stages of rockets, shrouds, clamps and fasteners.
- Fragments resulting from explosions and collisions.

The nonoperational payloads, nonfunctional mission-related objects, and fragments are generally referred to as debris or "space junk".

# The peril of space debris

of that may be remnants of Soviet anti-satellite tests. Russian "hunter satellites" explode within about 8km of their targets, spraying large amounts of shrapnel into the area.

That belt is within the altitude limits of the space shuttle, though not for a typical mission. But debris does filter down into the shuttle's primary operating altitude range.

"The hazard increases with the square of the radius of the spacecraft," Chobotov explained, "and right now the problem is not severe."

Chobotov calculates that a shuttle at 275km altitude will have 67 encounters (within a distance of 200km) with objects larger than one metre during a four-day mission. The probability of collision: a million to one.

"But there are many more small objects raining down through this area," he cautions. "We may need much more space-traffic control in the future."

And the number of objects up there is growing every year. NASA's Kessler believes that collisions themselves, mostly between pieces of junk, will be the major source of debris within 10 years.

Kessler did more than examine the actual debris hazard to active spacecraft. He looked at the way the debris belt propagates itself. Citing tests in which tiny fragments were fired at high velocity into metal blocks, he said that any collision produces a large number of new fragments. Each of these travels in its own orbit, gradually spreading out across space.

In one test, a 1.5mm glass sphere was fired into a 6mm thick aluminium plate at about 7km per second velocity. The sphere left an impact crater eight times its own diameter.

In another test, a bean-size pellet weighing about six grams was fired into a 500 gram aluminium block about the size of a brick. The block was destroyed, with new fragments scattered about.

A spacecraft weighing only 450kg could produce a million tiny fragments upon collision, Kessler said, though a few hundred seems to be the more common number. "The most probable point for collisions is where orbits intersect," Kessler said, "and the impact velocities can be from zero to about 15km per second."


**“ There’s a significant probability of a large object getting hit. If we had 10 platforms in space, each 100 metres across, one would get hit every year ”**

Thus the polar regions, where large numbers of surveillance satellites in north-south orbits constantly cross, and the geostationary nodes used by communications satellites could become danger zones. Many of the Delta fragments are in polar orbits.

With so many pieces in space, NORAD does well to keep accurate records. "For routine maintenance of an orbit, we attempt to get six observations per day," Lt Col Peter H. Roe, chief of the Command Control Systems Division, told me. That includes active satellites, particularly on military missions, and other pieces of interest.

For all objects below the 4800km altitude, NORAD attempts to get one data point per day, Roe said, and objects about to enter the atmosphere can get continuous, horizon-to-horizon tracking by NORAD sensors.

The space shuttle also gets NORAD's full attention. The shuttle's orbital path is fed into computers and constantly

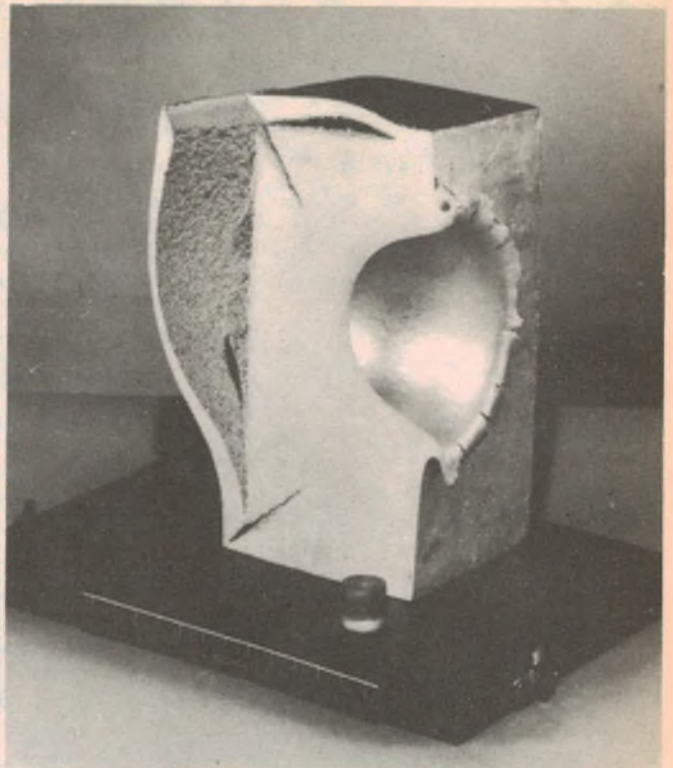

*A 6 gram pellet travelling at about 7km per second cratered this aluminium block.*

compared with all known objects along the way. "We run a protective net out ahead of the shuttle by six to 12 hours," Roe said. "It's a major task for our computers."

If a near miss is predicted, NASA is notified immediately. The same service may be available, on request, to other satellite operators. But NORAD stresses that all tracking data are subject to error, particularly for objects only observed once a day.

"It may be accurate to two kilometres, plus or minus 40 kilometres," Roe said. "You don't know within two kilometres exactly where a satellite is. You're dealing with mathematical averages,"

All data is fed into NORAD's command centre in huge tunnels and caverns carved under Cheyenne Mountain near Colorado Springs. There, banks of computers constantly sort the information, maintaining records of space debris that can be rapidly distinguished from missiles or other attack weapons.

The NORAD complex, occupied in the late 1960s, is a self-contained command centre shielded from nuclear attack by hundreds of metres of granite. I visited the complex recently.

We reached the first checkpoint by bus, driving through a 400m tunnel. From there, we walked, penetrating always deeper into the underground maze. Behind us, two massive blast doors, each one metre thick and weighing 25 tonnes stood ready to slam closed within 30 seconds of an alert.

Blasting out the nearly five kilometres of tunnels, some nearly 12m high, began in 1961. Inside those tunnels NORAD built 15 steel buildings, most three storeys high and all supported on huge coil springs and shock absorbers. The delicate computers, communications equipment, radar electronics, and other gear installed in those buildings are well protected against the shock of a direct nuclear hit on the mountain.

Rounding the corner of a tunnel, I found myself staring into



the blank steel side of the first three-storey building about 50m ahead. Moments later, we were inside a conventional government-issue building, and it was easy to forget that we were under a mountain. For the next few hours, we looked at electronics shops, computer rooms, even a dispensary and cafeteria.

But most of our attention went to the command centre, a room filled with consoles, screens, message boards, and a communications system that connects the NORAD commander and his staff directly to the White House and all military commands.

The NORAD inventory includes both radars and optical devices, such as the fabled Baker-Nunn cameras that have served space watchers well for decades. In lower orbits, pieces only a few centimetres across can be spotted. At geosynchronous orbits, objects one metre across can be seen.

A new system called Ground-Based Electro-Optical Deep Space Surveillance, soon to be operating at four globe-spanning sites, will improve that significantly. The surveillance system focuses sensitive vidicon cameras through large astronomical telescopes, then feeds the light measurements in digital form to computers.

The result is a display pinpointing anything moving across the star field at altitudes above 4800km. Objects as dim as magnitude 16.5 can be identified. That's the equivalent of finding a soccer ball 35,000km up.

Using the NORAD orbital data, two of the command's senior analysts have made widely respected contributions to determining the sources of orbital debris and to analysing the potential for collisions. Preston Landry and John Gabbard sparked major improvements in computer programs that backtrack orbital paths to determine what object fragmented, and where.

Gabbard has also looked at several suspicious events to determine whether they were explosions or collisions. "We've never had a problem figuring out what object fragmented," he told me, but deciding how it did is harder.

It takes deduction and speculation to find good candidates for collisions. One was PAGEOS, a 100-foot balloon inflated in orbit in 1966 and used to reflect radio signals. By 1975, PAGEOS was a partially deflated object of little interest.


That changed when the inert balloon suddenly showed up in NORAD tracking as more than 70 separate pieces. If an object pierced the balloon, Gabbard reasoned, there should be two separate sets of fragments — one moving out from the entry hole and one from the exit hole. Computer runs pointed to that possibility.

Gabbard even found a potential suspect for the impacting object, a small piece of an old satellite that was the only object in the area. That piece was never found again.

Yet the evidence is not perfect because tracking is not perfect. "Imagination and speculation can either lead you to an important conclusion or get you in trouble," Landry said of trying to pinpoint space collisions. "Without considerably greater capability than we have, it's going to remain speculation."

Deeply concerned over the growing risk of collision, NASA has put the General Electric Corporation to work evaluating instruments for an orbiting picket fence of sensors that would track debris in the realm where the shuttle flies.

"We're looking at three types of devices," GE's Sherm Neste said, "radar, lidar, and passive optical systems." In each case, the sensors would be put aboard spacecraft orbiting between 290 and 1000km and would monitor the amount and trajectories of particles from 0.1cm to 10cm. "We're emphasising the smaller sizes because ground radars can see particles down to the 10cm size," Neste said. "We want to add to the information available, not merely duplicate it."

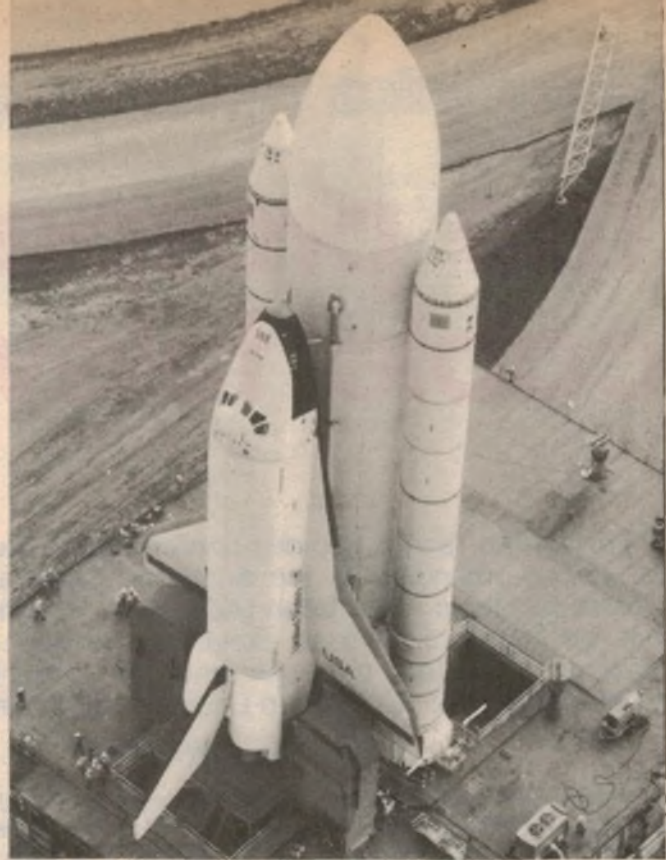

Each flight of the Space Shuttle is continuously tracked by NORAD and its path compared with the orbits of 5000 known pieces of space debris.

A space-borne radar with that capability would have a two-metre dish, Neste said. Because debris moves at such high speeds, the dish would not be swivelled. Instead, the radar beam itself would be steered electronically to follow its target.

Lidar, or laser radar, also is being considered. It is slightly smaller and easier to steer, but problems may exist in actually getting such a radar to work in space.

The third system, Neste said, would use passive optics, either charge-coupled devices or charge-injection devices viewing through three or four telescopes with overlapping fields of view. Any particle passing through that field would be spotted by its reflected sunlight.

"Objects in space are very bright," NASA's Kessler told me. "In sunlight, a one-centimetre object at one kilometre looks like a magnitude-one star."

Each sensor would see all debris in its area out to ranges of five to 10km. The data collected would let NASA finally determine what steps to take to protect its space-going people and machines.

Kessler heads the team that will examine the GE work through the latter part of 1982. A contract then may be offered for competition, with a prototype instrument flying aboard the shuttle in about 1987.

"The problem isn't critical today," Kessler said, "but it's time to be looking ahead. There's a significant probability of a large object getting hit. If we had 10 platforms in space, each 100 metres across, one of them would get hit every year."

The American Institute of Astronautics and Aeronautics paper on space debris, looking ahead to the increasing hazard, put it bluntly: "Corrective action must begin now to forestall the development of a serious problem in the future."

Reprinted with permission from Popular Science, July 1982. © 1982 by Times Mirror Magazines Inc. Artwork by Paul Alexander.

# The prospects for cable television

Following the recent two day conference in Canberra on cable television, organised by the Australian Cable and Subscription Communications Association (ACASCA), "Electronics Australia" was privileged to have an exclusive interview with one of the leading speakers at the conference, Mr Lionel Mudd, Development Manager of Rediffusion Engineering, in Great Britain.

by PHILIP WATSON

ACASCA represents a group of private companies interested in the commercial aspects of cable and subscription television. They include Amatil Ltd, Elders-IXL Ltd, Hills Industries Ltd, Myer Emporium Ltd, Neilson Premiere Ltd, Stereo FM Pty Ltd, and Philips Industries Holdings Ltd. They were all hoping that the Minister for Communications, Mr Neil Brown, a guest speaker, would announce government approval for cable and/or subscription television.

In the event, no such announcement was forthcoming, leaving the political side of things very much in limbo. But at least one aim of the conference was

achieved; it allowed a wide range of opinions to be expressed, both for and against, with some surprises. American news commentator, Mr Walter Cronkite, the "keynote speaker", provided one of them. If he is to be believed, the last thing Australia should do is aim for anything like the American cable scene as it is today.

But there was more to the conference than politics. The engineering behind cable systems is vitally important in terms of what facilities can be provided, at what cost, and with how many options of cost versus facilities, room for expansion, etc.

In short, if the government does make a favourable decision, what kind of system should they recommend? The British government is in the process of making a similar decision and Mr Mudd's address outlined the kind of service, in the technical sense, that has been recommended in that country. At the very least it could serve as a basis for an Australian government decision.

By way of background, the company Mr Mudd represents, Rediffusion, started out as a radio program cable distribution organisation in the late 1920s and, in 1949, decided to branch into cable distribution of TV programs. It was as a result of this decision that Mr Mudd joined Rediffusion in 1950.

Rediffusion's other interests include computers, flight simulators, communication receivers and transmitters, and similar specialised equipment, as well as TV receivers for the domestic market.


One of Lionel Mudd's first jobs on joining Rediffusion was to help install a cable TV system in Montreal in 1951, before Canada had a TV broadcast service, which distributed programs received off-air from across the US border.

Another installation was in Hong Kong, again before there was a TV broadcast service in that part of the world, and this attracted 120,000 subscribers. The system was based on the original British 405 line system, and was ultimately superseded by a 625 line broadcast system.

Cable systems were also much in demand in Britain before the country was adequately covered by broadcast transmitters. As more transmitters were installed, so the need for cable systems has fallen off, since, at present, these systems can only re-distribute programs off air.

But Britain is currently considering expansion of the cable system, whereby it would become a program source in its own right, and Mr Mudd is one of those chosen to advise the British Government on the technical and other implications of such a system.

And he would appear to be well

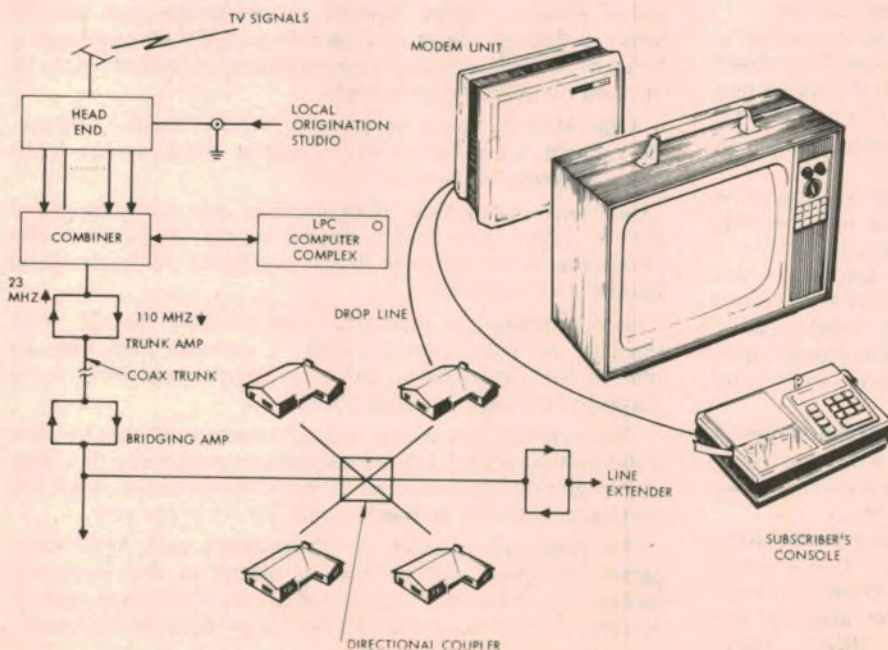

A typical cable television system may consist of a local switching centre, a trunk cable and couplers for individual homes. The home console selects channels.

qualified to do so. He is chairman of the British National Committee on Cable Television, chairman of the International Technical Committee on Cable Television, has been president of the Society of Cable Television Engineers in UK twice, and is chairman of the Papers Committee set up to advise the government. Within Rediffusion he is Development Manager and Deputy Director of Research.

One of the first questions I asked Mr Mudd was whether he could give any idea of the cost of installing a cable TV system in, say, Sydney or Melbourne. As I half expected, this turned out to be a "how long is a piece of string?" question, if only because there are so many variations on the type of system which might be selected and the actual methods of distribution.


The best he could do was to repeat the answer he gave to an entrepreneur who approached him after the conference with the same question. After qualifying the type of installation and the city involved (not Sydney) the answer was: "It could cost you \$1000 a home". Interestingly enough, the questioner did not seem to be unduly shocked at that figure. On the contrary, he commented that it could be a worthwhile investment. As a sidelight to this, Mr Mudd pointed out that, technically, cable television is not new to Australia. There are Australian companies who have been making cable television equipment for years; and exporting it. So, as he put it, "You don't have to import Poms or Yanks to tell you how to do it."

"And," he added, seeming to echo Walter Cronkite's thoughts, but on a technical level, "It is my belief that using American technology is not necessarily the way to go."

He then went on to talk about the Hunt report in the UK, which recommends a cable TV network with a capacity of 30 channels and having interactive facilities. The interactive facility is one whereby the subscriber can, via a keypad (similar to those for TV receiver or VCR remote control), "talk back" to the system.

The system would not necessarily be confined to 30 TV channels, nor would all the TV channels be used for entertainment. Some TV channels would be used for educational programs, and additional cable capacity would be used for FM sound, access to a central computer, data banks, teletext type information etc. The interactive keypad could even be used to call for help in an emergency.

Two possible distribution systems have been suggested for such a service. One, currently in use in most countries, is sometimes called the tree structured network. Signals are distributed first via a trunk, then via branches, until it finally reaches the leaves (individual homes). In

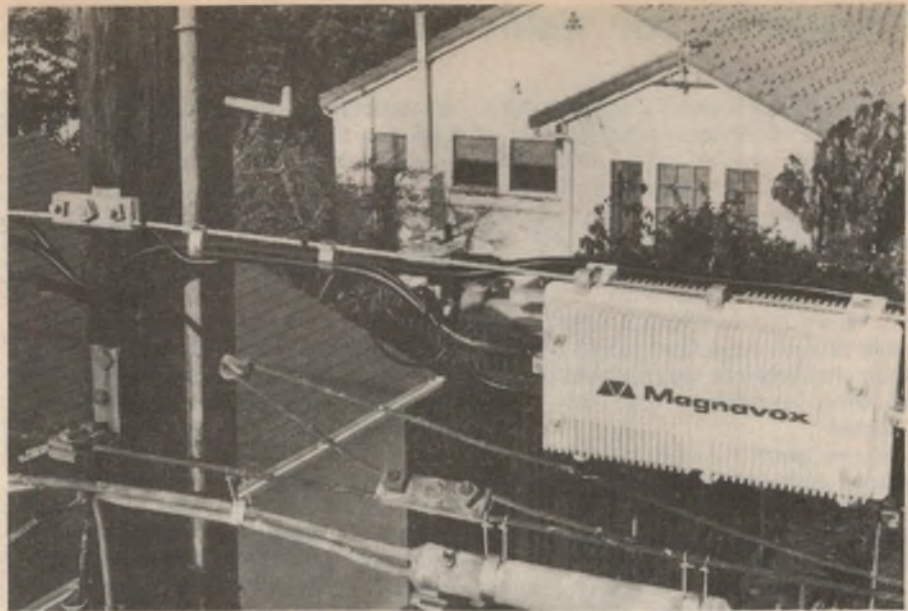

*This Interactive Data Exchange Module (IDEM) processes program commands from subscribers and distributes cable services to up to 32 subscribers in its area.*



*Cable may open the way for high definition television (HDTV), requiring receivers such as this NHK/Matsushita high resolution monitor.*

this system all the channels on the network are brought into every home.

This normally means that a converter must be provided in every home to interface with the TV set and there may be other facilities, such as decoders for scrambled signals etc. It all adds up to the need for an expensive, complex piece of equipment in each house, with the risk of tampering, theft of service, or loss of equipment.

An alternative approach is the "switched star" system. In this system bulk signals are delivered to switching centres and, from these, individual cables are provided for each subscriber. This cable can carry up to three TV signals at a time, and the signals required are selected at the switching centre on in-

structions sent to it from the subscriber's key pad. There is a minimum of equipment in the home.

Another advantage of the star system is that it becomes relatively simple to change the mode or frequencies of the bulk signal transport network, should this become necessary or desirable, without seriously disrupting the subscribers' cables or equipment. In fact, he may not even be aware of such a change.

There are a number of frequency bands and modes available for both bulk and subscriber distribution. A typical arrangement, as suggested for use in the UK, proposes a star system with bulk distribution at VHF and subscriber distribution at UHF, the latter being

## Prospects for cable television

essential to suit British TV sets anyway.

The bulk distribution would be via a seven tube coaxial cable. One tube would probably be devoted to FM and similar services, and the remaining six tubes would each carry five VHF TV signals, making 30 TV signals in all. Each tube would use the same five VHF channels. From the switching network, one cable to each subscriber would provide three channels into which would be fed whatever programs the subscriber selected.

At this point I raised the matter of relative costs. Was it more expensive to provide separate cable for each home, rather than have everyone tap onto a common cable?

Strangely enough, there isn't a great deal to it. Assuming that all the cables are laid underground — which is strongly recommended, for several reasons — then the digging of trenches is likely to be the major cost. The additional cost of individual cable to the switching centre is small, and would be offset by having less equipment in the subscriber's home, and other advantages.

Only where all the cables are run above ground, on existing poles, does the tree structured system come out significantly cheaper than the star system.

The next point I raised, prompted by the thought of overhead cables, was that of interference either into or out of the cable system. I reminded Mr Mudd that, in the US particularly, there have been a lot of problems caused by the cable systems including the two-metre

amateur band in the channels they use. Leakage, usually at junction boxes and other couplings, allows the TV signals to interfere with amateur signals and amateur signals to interfere with the TV signals.

Mr Mudd agreed that this problem was a serious one, and one of which he was very much aware. Two main factors contribute to this in the US. One is that many VHF cables are run above ground, and the other is the almost universal use of aluminium jacketed coaxial cable.

He pointed out that it is virtually impossible to make an effective, permanent connection to the aluminium jacket, no matter how elaborate the clamp or gland used. Oxide invariably forms in a short time, and interference results. For this reason, plus the aesthetic aspect, he strongly recommends placing all cables underground. (Just imagine the damage that parrots could do to overhead cables . . . Ed). And, obviously, copper jacketed cable would be preferred.

This led naturally to the next question; would optical fibres, as advocated by US and Australian amateur organisations, be a practical solution? Mr Mudd agreed that optical fibres have many advantages, including their immunity to interference problems, but they also have their problems. Even so, he considered they would be suitable for trunk circuits from the inner to the outer distribution areas.

The main problem with optical fibre techniques concerns the interfacing devices; the lasers which are modulated

by the TV signals and the photo-diodes which are used to convert the light impulses back into electrical signals. Both devices are markedly non-linear, meaning that relatively complicated and expensive compensating circuits have to be provided at every electron/photon junction.

One approach is to convert the signals to a digital format, but this is economical only for relatively long runs with few branches and, therefore, few analog/digital conversion stages.

Another subject we discussed was high definition TV. The US and Japan are currently experimenting with an 1125 line system, using a 5/3 aspect ratio screen as provided by either large picture tubes or projection. (A full report was given in "Electronics Australia's" companion magazine "VideoMag" for October/November 1982.)

Mr Mudd had seen this system demonstrated in Japan, and described part of the demonstration. "We were shown a film of a Mongol horde, mounted on their ponies, charging at the camera. The high definition image, on the 5/3 ratio screen, produced such a sense of immediacy that I ducked! Once people see it, they are not going to be happy with the old system any more."


But getting it to people is the snag. With a bandwidth in the region of 30MHz these signals can not be broadcast in the ordinary way. Various satellite schemes are under way, but these have a long way to go. In the meantime, cable is one obvious solution. It could easily cope with such signals and deliver theatre quality wide screen pictures right into the lounge room.

### What about content?

The final point I raised, and one which I think concerns everybody, is the suggestion that, as we increase the number of channels, there is a very real risk that the quality of the programs will drop in proportion.

Initially, perhaps tongue in cheek, Mr Mudd protested that, as an engineer, he couldn't have a view on that. Then, more seriously, he went on to suggest that it was all a matter of discipline and, "... not just because I'm a Pom visitor — I'm a very willing Pom visitor — the general air of responsibility in Australia, particularly as indicated by a lot of the papers given at the ACASCA conference, is such that, if a high capacity cable television system is going to succeed anywhere, it will succeed in Australia."

Well, that remains to be seen. Right now there is some doubt as to whether we are going to have a chance to find out immediately. But, if we do, let's hope Mr Mudd's confidence is justified. ☺

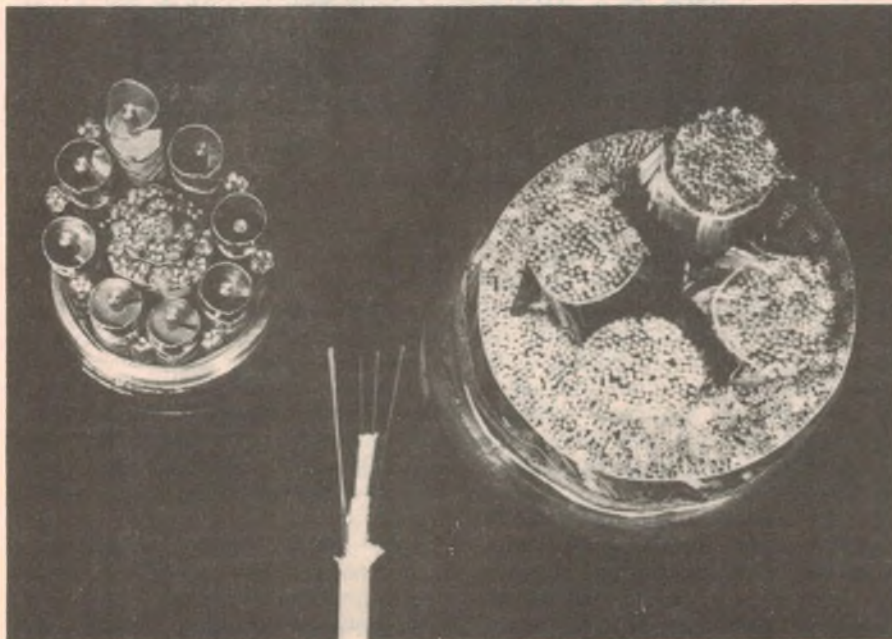

Optical fibre may be an alternative method of distribution for cable TV. The six-fibre ITT cable shown here (centre) has more capacity than both larger copper cables combined.

# PUBLIC ADDRESS AMPLIFIERS

The TPA 100 and TPA 150 professional quality Public Address Amplifiers are designed and built in Australia. They offer the professional installer outstanding performance, features and facilities not found as standard on any other brand. ★ XLR 3-31 connectors ★ Balanced mic inputs with LOW cut filters ★ Booster add on facility ★ 19" Industry Standard Rack Mounting Cabinets ★ Electronic Chime ★ Short Circuit and Overload protected.



TPA 100/150 Amplifier

Power Output  
 TPA 100 100W RMS  
 TPA 150 150W RMS  
 Harmonic Distortion  
 Less than 2% at rated output  
 Frequency Response  
 45 to 15000 Hz ± 3 db  
 Hum and Noise  
 Fundamental 80 db  
 Microphone 60 db  
 Auxiliary 70 db  
 Tone Controls  
 Bass ± 13 db at 100 Hz  
 Treble ± 13 db at 10 KHz  
 Outputs  
 4, 8, 50V, 70V, 100V Balanced  
 Dimensions  
 430W x 250D x 138H (mm)  
 Weight  
 TPA 100 12kg  
 TPA 150 13.5kg

\$375.00 TPA 100  
 \$495.00 TPA 150



PB 150 Booster Amplifier

Power Output  
 150W RMS  
 Harmonic Distortion  
 Less than 2% at rated output  
 Frequency Response  
 45 to 15000 Mz  
 Hum and Noise  
 80 db  
 Input Sensitivity  
 1V At 10 K  
 Outputs  
 4, 8, 50V, 70V, 100V Balanced  
 Dimensions  
 430W x 250D x 138H (mm)  
 Weight  
 13kg

\$375.15



TPA 50/70/90 Amplifier

Power Output  
 TPA 50 25W RMS  
 TPA 70 50W RMS  
 TPA 90 70W RMS  
 Harmonic Distortion  
 Less than 1.5% at rated output  
 Frequency Response  
 50 to 15000 Hz ± 3 db  
 Hum and Noise  
 Microphone 60 db  
 Auxiliary 70 db  
 Outputs  
 4, 8, 16, 70V, 100V unbalanced  
 Dimensions  
 310W x 230D x 80H (mm)  
 Weight  
 TPA 50 3.8kg  
 TPA 70 4.3kg  
 TPA 90 5.1kg

\$163.12 TPA 50  
 \$201.96 TPA 70  
 \$221.25 TPA 90



\*All prices are plus 20% sales tax if applicable. Dealer enquiries welcome.


Head Office: 562 Spencer St, West Melbourne 3003. Telephone: (03) 329 7888. Telex 32980.  
 Southern Depot: 1103 Dandenong Rd, East Malvern 3145. Telephone: (03) 211 8122.

## SCIENTIFIC—PROGRAMMABLE ★ CALCULATORS ★ POCKET COMPUTERS

### CASIO

INCL TAX EX TAX


		INCL TAX	EX TAX
FX82	38 Funct, 8 Digit, AA Cells 4000 Hr	\$ 22.00	\$ 19.00
FX100	42 Funct, 10 Digit, AA Cells 7500 Hr	27.00	23.00
FX550	48 Funct, 10 Digit, Lithium Bat	29.50	25.50
FX950	41 Funct, 10 Digit, Solar	36.00	31.00
FX990	64 Funct, 12 Digit, Solar	41.50	36.00
FX3600P	61 Funct, 12 Digit, 7 Mem 38 Step	51.00	45.00
FX602P	50 Funct, 12 Digit, 88 Mem, 512 Step	125.00	110.00
PB100	25 Funct, 12 Digit, 544 Steps Basic	99.00	89.00
FX700P	25 Funct, 12 Digit, 1568 Steps Basic	132.50	115.00
FX702P	55 Funct, 20 Digit, 1680 Steps Basic	172.00	150.00
FX801P	Same as 702P plus Cassette & Printer	505.00	450.00
FA-2	Cassette Interface for 602P & 702P	45.00	40.00
FA-3	Cassette Interface for PB100 & 700P	45.00	40.00
FP-10	Printer for 602P & 702P	85.00	75.00
OR-1	1K Expansion RAM for PB100	35.00	31.00



CASIO FX602P



CASIO FX801P



CASIO PB100

WE ALSO STOCK:  
 TEXAS INSTRUMENTS  
 AND HEWLETT PACKARD

WRITE OR PHONE  
 FOR DETAILS AND PRICES.

FREE DELIVERY IN AUSTRALIA  
 — BANKCARD ACCEPTED

**Calculator & Computer**  
 DISTRIBUTORS

SUITE 4,  
 THE VILLAGE CENTRE,  
 29-31 WINDSOR RD,  
 KELLYVILLE,  
 NSW. 2153

PHONE  
 (02) 629 2333

# ELLISTRONICS

PROPRIETARY LIMITED

289 Latrobe Street, Melbourne 3000. Phone: (03) 602 3499 Telex AA37758 Listron



LINEAR  
**\$12.50**  
BOOK


## REGULATORS

### UA78P05SC

- 10 A OUTPUT
- INTERNAL THERMAL OVERLOAD PROTECTION
- INTERNAL SHORT CIRCUIT CURRENT LIMIT
- LOW DROPOUT VOLTAGE (TYPICALLY 2.3 V @ 10 A)
- 70 W POWER DISSIPATION
- PIN-FOR-PIN COMPATIBLE WITH THE UA78HO5/A and SH323
- STEEL TO-3 PACKAGE



**\$8.98**

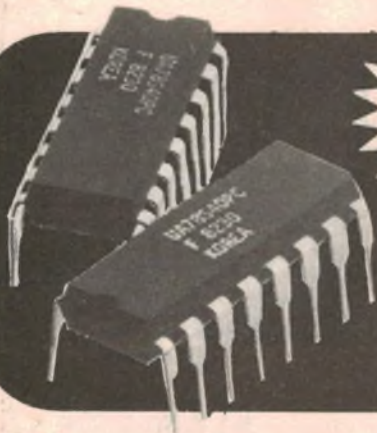

**\$1.45**


### UA78S40

- STEP-UP, STEP-DOWN OR INVERTING SWITCHING REGULATORS
- OUTPUT ADJUSTABLE FROM 1.3 to 40 V
- PEAK CURRENTS TO 1.5 A WITHOUT EXTERNAL TRANSISTORS
- OPERATION FROM 2.5 to 40 V INPUT
- LOW STANDBY CURRENT DRAIN
- 80 dB LINE AND LOAD REGULATION
- HIGH GAIN, HIGH CURRENT, INDEPENDENT OP AMP
- PULSE WIDTH MODULATION WITH NO DOUBLE PULSING

### UA78HGA

- 5.0 A OUTPUT CURRENT
- INTERNAL CURRENT AND THERMAL LIMITING
- INTERNAL SHORT CIRCUIT CURRENT LIMIT
- LOW DROPOUT VOLTAGE (TYPICALLY 2.3 V @ 5.0 A)
- 50 W POWER DISSIPATION
- ELECTRICALLY NEUTRAL CASE
- STEEL TO-3 PACKAGE
- ALL PIN-FOR-PIN COMPATIBLE WITH UA78HG

**\$5.95**


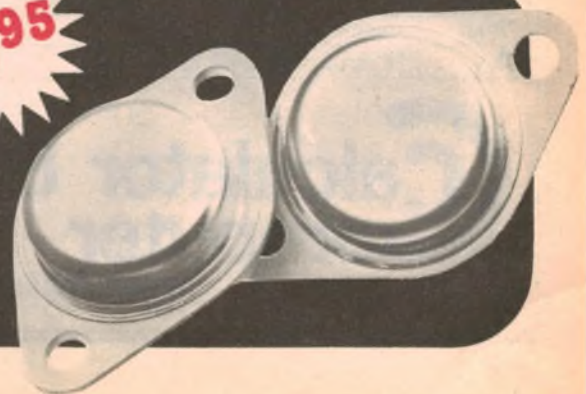


# ELECTRONICS

PROPRIETARY LIMITED

289 Latrobe Street, Melbourne 3000. Phone: (03) 602 3499 Telex AA37758 Llistron

## REGULATORS



### LINEAR REGULATORS

DEVICE	PRICE
UA105HM	.98
UA109KM	1.65
UA117KM	3.95
UA209KM	1.50
UA305AHC	.95
UA305HC	.73
UA309KC	1.10
UA317KC	1.75
UA317UC	.69
UA376TC	.35
UA431AWC	.42
UA494DC	2.88
UA494PC	2.62
UA723DC	.63
UA723HC	.78
UA723PC	.39
UA7805KC	1.05
UA7805UC	.50
UA780UC	.55
UA7808KC	1.05
UA7808UC	.50
UA7812KC	1.10
UA7812UC	.50
UA7815KC	1.05
UA7815UC	.50
UA7818KC	1.05

UA7818UC	.55
UA7824KC	1.05
UA7824UC	.55
UA7885UC	.95
UA78GKC	1.60
UA78GU1C	.90
UA78L05AWC	.28
UA78L09AWC	.28
UA78L12AWC	.28
UA78L15AWC	.28
UA78L82AWC	.28
UA78M05HC	1.10
UA78M05UC	.48
UA78M06HC	1.10
UA78M06UC	.48
UA78M08HC	1.10
UA78M08UC	.48
UA78M12HC	1.10
UA78M12UC	.48
UA78M15HC	1.10
UA78M15UC	.48
UA78M24UC	.48
UA78MGU1C	.79
UA78S40DC	1.75
UA78S40DM	2.45
UA78S40PC	1.45
UA7905KC	1.10
UA7905UC	.50
UA7908KC	1.10
UA7908UC	.55
UA7912KC	1.10
UA7912UC	.50
UA7915KC	1.10
UA7915UC	.50

### HYBRID REGULATORS

DEVICE	PRICE
SH1605	9.95
SH323SC	4.80
UA78H05ASC	5.70
UA78H05SC	4.75
UA78H12ASC	6.72
UA78H12SC	6.50
UA78HGASC	6.55
UA78HGSC	6.50
UA78PO5SC	8.98
UA79HGSC	10.20



PRODUCTS MANUFACTURED BY

## FAIRCHILD

A Schlumberger Company  
**ONE OF THE WORLDS LEADING  
 SEMICONDUCTOR MANUFACTURERS**

# ELUSTRONICS

PROPRIETARY LIMITED


289 Latrobe Street, Melbourne 3000. Phone: (03) 602 3499 Telex AA37758 Listron

## C. Itoh PRINTERS




**\$725.00**  
(\$795 Incl. Tax)

**PRO-WRITER 8510A**  
120 CPS Dot Matrix Parallel

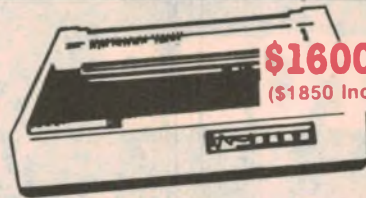

**\$1600.00**  
(\$1850 Incl. Tax)

**STARWRITER F-10**  
40 CPS Daisy Wheel



**\$1050.00**  
(\$1225 Incl. Tax)

**MODEL 1550**



DISC DRIVE  
**MITSUBISHI**

MODEL M4854

M2896-63

- SLIMLINE 8"
- DOUBLE SIDED, DOUBLE DENS.
- NO AC POWER REQUIRED
- 1.6 M BYTES UNFORMATED
- 77 TRACK/SIDE

**\$495.00**

- SLIMLINE 5 1/4"
- DOUBLE SIDED, DOUBLE DENS.
- 96 TRACK/INCH
- 9261 BITS/INCH
- 1.6 M BYTES UNFORMATED
- 3 ms TRACK TO TRACK
- 77 TRACK SIDE

**\$385.00**



DISC DRIVE  
**MPI-B51**

- SUIT SYSTEM 80
- TRS 80 ETC.

COMPLETE WITH  
POWER SUPPLY & CASE

OUR PRICE  
**\$332.00**

5 1/4" SOFT SECTORED

- S.Side Double Density **\$29.95/10**
- D.Side Double Density **\$49.00/10**

8" SOFT SECTORED

- S.Sided Double Density **\$54.65/10**
- D.Sided Double Density **\$52.00/10**



6116 P-3	120 NS	\$5.00
2716	450 NS	\$2.95
2732	450 NS	\$4.50
2764	250 NS	\$10.50
4116	150 NS	\$1.10
2114	200 NS	\$1.20
4164	200 NS CERAMIC	\$5.50
Z80 CPO		\$3.50
Z80A CPO		\$3.75
Z80 CTC		\$3.20
Z80A CTC		\$3.80
Z80 PIO		\$2.95
Z80A PIO		\$3.45
Z80 S10		\$8.30
Z80A S10		\$10.35

BD139	.22	BU326	1.20	RED LED	.05
BD140	.22	BUX80	2.10	GRN LED	.09
MJ802	2.50	BC547-8-9	.05	YELL LED	.09
2N3055	.56	BC557-8-9	.05	FND 500	.79
BU126	1.25	BC327-8	.05	MAN 74A	.68

6800	\$2.76	4011	.14
6802	\$3.80	4016	.24
6809	\$8.10	4017	.44
6821	\$1.65	4023	.16
6840	\$3.22	4028	.45
6845	\$8.50	4040	.52
6850	\$1.45	4051	.49
8212	\$1.19	4066	.28
8216	\$1.05	4081	.16
8224	\$1.35	4511	.49
8255	\$2.22	4520	.56
8155	\$3.80	74LS00	.13
LM301	.22	74LS04	.14
LM308	.29	74LS14	.19
LM324	.37	74LS30	.16
LM339	.38	74LS32	.13
LM555	.20	74LS47	.34
LM741	.23	74LS90	.26
LM340T5	.36	74LS141	.33
LM340T12	.36	74LS240	.49
LM317T	.62	74LS244	.43
LM340K5	.89	74LS245	.57
LM340K12	.99	74LS366	.28
78H05K	\$3.98	74LS367	.29
LM317K	\$1.23		



ALL PRICES PLUS 20% TAX  
TRANSISTORS PLUS 32.5% TAX  
POST \$2. HEAVY ITEMS EXTRA



# Software for the Super-80


And they said "Give us software for the Super-80" and LO there was software — piles of it!  
A whole book, in fact. We originally published with a cover price of \$5.00, but our accountant says "Clear them out quick!" So as a special deal we've slashed the price to \$4.00 over the counter — or \$5.00 post paid.

## The program headings are:

Poker Machine Simulation;  
Printing Demonstration; Calendar  
Calculator; Othello; Investment  
Analysis; Guessing  
Game; List and Sort; "Fred the  
Shrink"; Simple Maths Drill;  
Lotto Number

Selector; Triangle Solutions;  
Mortar Attack; Caves & Monsters  
Amateur Radio Q-code Tutorial;  
Caravan Park Directory;  
Super-Pokey Game;  
Tattslotto Selector.

Note: this book is exclusive to, and available only from, "Electronics Australia".

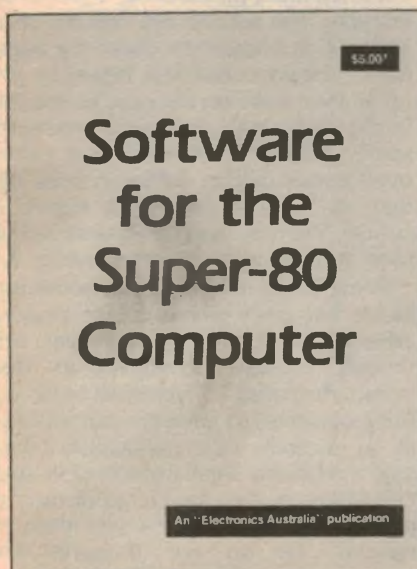

To Electronics Australia, PO Box 163, Chippendale 2008

Please send me . . . . . copies of "Software for the Super-80 Computer" at \$5.00 each (includes post and packing)

NAME . . . . .

ADDRESS . . . . .

. . . . . POSTCODE . . . . .

I enclose cheque/postal order to the value of \$ . . . . .

Please charge by Bankcard \$ . . . . .

Bankcard Number 496 . . . . .

Expiry Date . . . . . Cardholder Signature . . . . .

If you are using Bankcard, be sure to include your full address (not a PO Box)

Jack  
O'Donnell's

# Altronics

the live-wire company  
from the Golden West



This issue of "Electronics Australia" features a 48-page catalogue from the West Australian company, Altronics. As you might imagine, such a large catalogue costs a fortune to compile and insert in this magazine, so proprietor Jack O'Donnell wanted a little more for his money. As a sop to Jack, we allowed him to write this boring piece about himself and his operation.

Seriously, though, Altronics has proved to be a dynamic electronics retailing company with rapid growth in the last few years. Altronics has four main activities: a retail shop and showroom, a mail order centre, kit department and an import/wholesale division. A particular feature of Altronics is its very fast mail order operation which we can certainly vouch for. But, as we said, we'll let Jack tell his own story.



*This is the hub of the Altronics operation – the retail and mail order centre at 105 Stirling St, Perth.*

## The Beginning

"The beginning you ask? Er, well yes, I suppose it was at the tender age of 14 when I built my first project – you guessed it, a CRYSTAL SET! It worked too. When was this? I'll give you a clue, the OC44 was all the rage and cost a mere four pound, six shillings and five pence – which was a full week's wages for a 1st year apprentice! Today you can get

around 700 BC548s for the equivalent real dollars.

"After I left school, I spent five years as a technician-in-training at the rather excellent Radio Training School in Perth run by the then Department of Civil Aviation (and what's more, they paid me as well). Apart from the comprehensive grounding in electronics the DCA school provided, they tended to heap praise and promotion on the neat and tidy conformists and completely overlook untidy, troublesome budding geniuses like myself. So eventually, as no one seemed to notice my unique qualities, I quit.

"Starting off in business was tough, a lot tougher than I had ever dreamt. My business was in the manufacture and installation of audio communications or, in other words, public address systems. A big break came in winning the tender for the sound system in the Regent Hotel in Fiji. We beat all the big names in the industry, both in price and in design concept. But I began to be interested in electronics retailing.

"Back in those days, the typical electronics shop seemed to be summed up as a painful wait at a long counter only to

stock, kits and so on and, with self-service the order of the day, the sales staff had plenty of time to answer technical queries, look up transistor equivalents (101 times a day) and generally provide a service to customers that our competitors could not match.

"The secret was that the customers spent 90% of the time serving themselves, leaving us free. Most importantly, we were blessed with bright young enthusiastic staff. While competitors were forever complaining that 'you can't get people to work anymore', we were, and are still today, pestered by keen young enthusiasts busting to work for us.

"Some years back, a survey into customers' experience with retail establishments revealed that the strongest complaint was not what you would expect, like the prices being too high or lousy after sales service. No, the problem was the 'rudeness and discourtesy shown to shoppers by sales staff'. Needless to say, I am very proud of the staff at Altronics and the service they give to our customers. This is the key and whereas many are talking 'gloom, recession and unemployment' Altronics is growing at a rate exceeding 60% per annum!

"Anyway when we opened the shop in 1976, we more or less broke even on the first day. The second day was the same and just as I began to chew my fingernails – bingo – business began to pick up and we were on the road to success. In the years since then, we have served some 200,000 customers and turned over several million dollars in sales. Not that it's been a breeze. It hasn't, of course. We have had to work incredibly hard at times with little to show for it."

"Being based in Perth poses some problems but does give us some amazing advantages. On the negative side though, consider advertising in 'Electronics Australia'. For years we could not bring ourselves to advertise our business in an Australia-wide publication which sold a relatively small portion of its total circulation in WA, as a large portion of our advertising budget would then be wasted. Or so we thought! The

be eventually informed by often disinterested staff that 'XYZ was out of stock! There had to be a better way and the supermarket format was the answer, to my mind.

## The real beginning

"Altronics was actually born on December 6 1976. Our supermarket layout enabled us to attractively display

frustrating thing was that a good percentage of our customers are dyed-in-the-wool enthusiasts and are regular readers of EA. On that basis I was always aware that if we were ever to do any effective advertising it would have to be via EA but the cost put me off.

"Finally we took the plunge in January 1981 and tried our first magazine advert in EA. The results were truly gratifying and orders came in from everywhere, including Papua New Guinea and New Zealand.

"Now to the huge advantage of being WA-based. WA exports roughly only one quarter as much to the eastern states as she imports from them. Hence the freight and overnight courier services



Here are two views of the Altronics retail centre while below is a view inside the extensive warehouse.

are all fairly empty on the return journey east. The resultant freight delivery costs from Perth to the other states are unbelievably cheap. For example, it costs us, say, \$4 to deliver a parcel from Perth to Sydney or Melbourne whereas the cost to one of our competitors in NSW to deliver the same parcel to Perth could be up to \$20."

"Western Standard Time is two hours behind the Eastern States in winter and three hours behind in summer. But that actually gives us an unbeatable advantage.

"For mail order customers we man our phones till 6pm (WA time). Any jet-service order phoned through up till that time is despatched on the 11pm flights which arrive in each State capital city the next morning. Most city couriers then deliver the parcel before the morning is over and the customer receives his or her order all the way from WA. Simple arithmetic tells you that it is virtually impossible for other suppliers to match or beat this service.

"A customer from Canberra rang one



morning to say the order he had placed by phone at 7.30pm the night before had just arrived. It was 10.30am. 'My order averaged 130 miles per hour from the time I phoned', he exclaimed.

"I am convinced that our ability to deliver swiftly together with an energetic approach to our business will be key factors influencing future growth. We have a good-looking shop and place a strong emphasis on the latest kits and the magazine projects, in addition to a wide range of electronic components. The

Altronics wholesale division imports the majority of products we sell. The cost savings are reflected in our competitive prices."

### The Future

"As electronics influences everyone's daily lives to a greater degree each year, it is axiomatic that the numbers of electronic enthusiasts will continue to swell. This fact, together with the dynamic nature of the industry, assures a bright future for Altronics as well as (begrudgingly) our competitors."



# FORUM

Conducted by Neville Williams

At long last . . .

## RECORDING IS OUT OF THE RUT!

In its early days, disc recording was regarded as something of a miracle. Perhaps it's no less of a miracle that a system so basically crude, yet so ingeniously refined, has dominated the domestic recording scene for so long. Only now, in 1983, does it look like giving way to a far superior system — the laser-read digital disc.

The changeover from the old to the new will not be without a certain trauma. As with the demise of the steam train, the passing of the traditional groove and stylus recording system will doubtless be marked by a good deal of lament and nostalgia.

The stereo LP record, as we know it, is the culmination of a century of vision, challenge and endeavour, as well as being the repository of a wealth of recorded sound. One can hardly expect to see it abandoned without some show of emotion.

By contrast, the new laser-read compact disc is the end product of quite recent, intensive research by a relatively small number of back-room boffins.

It has no tradition, no romance of the Edison kind, no continuing challenge for the hifi perfectionist. You simply buy a compact disc player and routinely expect an order of performance to specifications that are quite unattainable with even the most expensive and delicately adjusted conventional phono deck. There the matter ends.

In one sense, instant, off-the-shelf "perfection" may look very impressive in the sales brochures but it is dreadfully final, even somewhat dull for the itchy-fingered buff, who likes to feel that he has had some part in the end result.

If you don't know what I mean, pay a visit to a live steam railway museum and watch the greying enthusiasts as they move lovingly around their charges, polishing the gauges and dribbling oil from their long-snouted cans on to the drive rods. For all their operational superiority, diesel locos just don't evoke that kind of affection.

For a while, at least, the compact disc and player could also face the problem of acceptance.

My introductory remark about the "miracle" of the early 78rpm phonograph records was meant to be taken seriously.

I can remember as a lad, back in the '20s, the almost universal puzzlement as to how a phonograph did what it did. Technically minded people were no exception. Mechanical things they could understand and repair but, to many of them, the ultimate mystery was how a steel needle, riding the groove in a phonograph record, could recreate the voice of Melba or Caruso!

Mind you, the sound that actually issued from the metal or plywood horn, in those days, was a poor imitation of the original but remember that I am talking about a period when moving pictures were silent and when wireless was



(Photograph from the makers of "Parastat" and "Dust-Bug" record cleaners.)

something that most people had only read about in the papers. There wasn't a great deal of competition!

In the middle and late '20s, the phonograph record took a significant forward step with the development of electrical recording and facilities for electrically amplified playback.

I saw these developments at close quarters, firstly in my parents' business, which handled a range of wind-up phonographs, and later as I encountered the first electric pickups at the start of an awakening interest in "electronics" — as it was later called. The pickups were fitted to phonograph tonearms in place of the usual soundbox.

At that stage, amplified reproduction through primitive horn or cone loudspeakers was a dubious advantage but quality of reproduction continued to improve through the '30s and '40s culminating, for me, in an involvement with what was claimed at the time to be Australia's most advanced radiogram. Manufactured by Reliance Radio in Barrack St, Sydney, it used the best of everything, including an expensive imported hifi loudspeaker, and a system of automatic volume expansion — a kind of pre-Dolby Dolby.

But no amount of elaboration could overcome the limitations of the old 78rpm format, which remained sacrosanct, jealously preserved by the major record companies. Small, progressive improvement was acceptable, as long as it didn't threaten compatibility with the past! Growing speculation about radically up-graded parameters, finer grooves, etc, belonged "under the carpet", along with another unsettling German development: that of magnetic tape recording.

As I remember it, the late Sir Ernest Fisk, then heading up Britain's EMI, even sought to reassure record dealers throughout the Empire that things would not change on the record scene until his company had decided that the World

was ready for change and had given appropriate notice!

It proved to be a singularly inopportune and futile pronouncement, with the then ruggedly independent Decca company, amongst others, moving first into finer groove 78rpm discs for electrical pickups only, followed by 33rpm long-playing microgroove records.

They signalled the beginning of a substantial revolution in terms of playback quality, largely because the industry had, at long last, burst through the artificial constraints of the mechanical era. Even so, all the familiar elements still remained — the groove, the stylus, the geometry of groove tracing, the compromises to do with tracking weight, wear, signal amplitude, distortion, system noise, wow and flutter, etc. Essentially what we had was a new set of parameters, but all the old problems!

But, while the microgroove system offered a new plateau in home audio reproduction, it lacked one basic dimension which was emerging as desirable for subjective satisfaction — multi-channel or stereo reproduction.

That followed in the late '50s and, in collaboration with a former Editor, the late John Moyle, we in the magazine were privileged to present some of the earliest stereo sound demonstrations in this country.

Stereo has, of course, won universal acceptance since then but, essentially, it remains an ingenious elaboration of the monophonic method — yet another variation on the hoary old groove-and-stylus theme.

## EVEN QUADRAPHONIC

The same was true of quadrasonic disc recording, which proved a commercial disaster, partly because of wrangling between the various recording companies and partly because hifi fans balked at having to accommodate four separate loudspeaker systems.

Even so, the research into quadrasonic sound recording and playback was not wasted. It yielded valuable new insight into disc recording and manufacture, stylus and cartridge design and a variety of other issues. It helped push the conventional stereo disc system to its present high stage of refinement. And, let's face it, a modern top quality disc is pretty impressive as a source of recorded sound.

Indeed, as I contemplated this article, I found myself quite seriously asking the question: do home music lovers really need more than they already have: a highly refined phono disc system, supplemented by a highly refined compact cassette system? Both systems can more than satisfy the average listener, and both provide some scope for further ex-

ploitation for — and by — the dedicated hifi buff.

Why all the fuss about the laser-digital compact disc? Will it meet a real need or is it primarily a new product to boost a flagging industry?

Demonstrations of the compact disc, turned on for representatives of the media and hifi industry did little to dispel the mood of doubt. Like most such demonstrations, they were social occasions, with lots of hand-shaking, back-slapping and hard sell, plus food, drink and spasms of loud music.

In such surroundings, the subtleties of the sound tend to become buried by the ballyhoo!

What a difference there was when I was able to take a compact disc player home, along with a few discs, hook it up to my own amplifier and simply shut the door, relax, listen and think.

## LIGHT DAWNS!

It was then that the implications really hit me. This was not just another record player; another addition to the analog disc family; another climactic moment in 100 years of development. This was technology of a completely new and different kind, which wiped out all the old hassles and problems at one stroke.

Quite spontaneously, I found myself rehearsing a quite different conviction for this article: the phono disc that I/we have known for a lifetime is doomed. For sure, it will continue for as many years as it takes to fossilise but superseded it has been, just as surely as 78rpm and mono recording. It is fated for obsolescence.

There were two reasons for saying this — the first being the unstressed clarity of the sound and a sense that one was listening through a truly "transparent" medium to what was on the master tape. It had behind it the logic that a mass-less beam of light had to be a preferred method to a stylus desperately trying to trace the complex deviations of a physical groove.

The other was the performance specification — of necessity, in these days of consumerism, a credible statement. These are covered elsewhere in the issue.

Nor is it a matter of improved performance won, at considerable cost, by further extremes of quality control. The fact is that many of the problems inherent in phono disc players do not arise in the laser-digital compact disc system.

There is no scope for wow or flutter, no rumble, no speed regulation problem, no acoustic feedback. There are no tracking or resonance problems with the tonearm, no delicate compromises involving tracking weight and cartridge behaviour, no hypercritical stylus and cartridge dynamics, no stylus wear and no disc wear.

I am not suggesting that the compact

## Beeforth On Oscilloscopes




If you have anything to do with electronics then I bet you can't think of many jobs where an oscilloscope isn't useful. I guess it all comes about from the old adage 'a picture is worth a thousand words'. Now, in less than a thousand words, I'll put you in the picture regarding TRIO's CS-1560All oscilloscope.

The 1560All is a dual trace, 15MHz, honest-to-goodness value for dollar instrument. It is well suited to industrial applications, TV servicing, production line testing, educational or hobby work. It is rugged, reliable, easy to use and very portable. Vertical sensitivity is good without sacrificing large signal input capability. Sweep rates are from a high 0.5µS to 0.5S per division and a high persistence P7 Phosphor is now available as an option to make full use of the slowest ranges.

Triggering can be normal or via a video sync separator and has to be the best in any low-cost oscilloscope ever made. How often have you used a big name, high performance oscilloscope for routine work and been driven mad by the constant fiddling needed to maintain a stable triggered display particularly when the input is variable. With one wave of a CS-1560All the problem vanishes. Up to its rated 3db point of 15MHz it will produce a locked display with only 0.2 of a division deflection amplitude. At 20MHz it requires only 0.3 of a division to lock and at 25MHz, 0.7 of a division. That is real triggering!

Along with the rest of TRIO's range, this instrument is slanted toward useability, the kind of convenience and practicability that makes you reach past the 'Gee wizz technoscope' to grab the little TRIO with the sharp, stable, bright blue trace that shows the whole picture quicker than I can tell it.

The best way to see why I'm so keen on the CS-1560All is to check it out for yourself at any Parameters location or stockist right throughout Australia.



Trade Enquiries Sydney (02) 439 3288  
Melbourne (03) 580 7444

Adelaide:	PROTRONICS TRIO ELECTRIX K D FISHER & CO	(08) 212 3111 (08) 51 6718 (08) 277 3288
Brisbane Canberra	ST LUCIA ELECTRONICS GEORGE BROWN & CO ORTEX	(07) 52 3547 (062) 80 4355 (062) 82 4995 (002) 34 9899
Hobart	IMBROS GEORGE HARVEY ELECTRIC	(002) 34 2233
Launceston	GEORGE HARVEY ELECTRIC	(003) 31 6533
Melbourne:	RADIO PARTS GROUP GEORGE BROWN & CO ELLISTRONICS	(03) 329 7888 (03) 419 3355 (03) 602 3282
Newcastle:	D G E SYSTEMS GEORGE BROWN (NEWCASTLE)	(049) 69 1625 (049) 69 6399
Perth	W J MONCREIFF CO PROTRONICS	(09) 325 5277 (09) 362 1044
Rockhampton Sydney	PURELY ELECTRONICS GEORGE BROWN & CO DAVID REID ELECTRONICS	(079) 2 1058 (02) 519 5855 (02) 29 6601
Townsville Wollongong	RADIO DESPATCH SERVICE NORTEK MACELEC	(02) 211 0191 (077) 79 8600 (042) 29 1455

# MORE SCAN FOR YOUR DOLLAR

## SCAN X ANTENNA

Designed especially for scanners!  
Very easy to assemble, comes  
complete with 15m cable and plugs

Rugged design -  
will last for years!

Will mount on  
vertical mast up  
to 38mm dia.

Cat D-4430

Wide operating  
frequency range  
65MHz-520MHz

No special mounting  
needed - will stand  
alone for use on roof  
or patio.

**\$49<sup>95</sup>**

with the brilliant

## DICK SMITH PRO 40 SCANNER

Compare this superb Scanner with others of similar performance elsewhere, at nearly twice the price! The new PRO 40 Scanner from Dick Smith represents the state-of-the-art in computerised scanning receivers! Completely solid state computer-controlled circuitry - no expensive crystals to buy - complete with battery backup for stored frequencies.

Cat D-2805

**\$399**

## you can hear . . .

Just about everything from harbour control nudging a supertanker into its berth, to telephone conversations from cars speeding along city streets! All the emergency services, authorities and forces . . . And of course, there are thousands of business radio stations, amateur and CB radio operators. Plus the thousands of stations in the band that we don't know about yet (we're waiting for you to tell us about them!)

## look at these special features

Touch-type, splash proof keyboard for direct entry of all operational commands, frequencies, etc. Ideal as either a base or mobile scanner (operates on 12V - beware of others that don't operate from 12V!) with its own self-contained whip antenna or external plug-in antenna. Also included is a specially prepared Australian instruction manual written and produced by our own engineers.



Also available  
from good bookshops  
and newsagents

## DICK SMITH'S AUSTRALIAN RADIO FREQUENCY HANDBOOK

Up-to-date and thorough listings of virtually all the VHF/UHF radio users we've been able to find. YES - find out who is where - and where to listen for all the excitement! PLUS: air band, marine band, and how to use a scanner, amateur radio and CB etc.

Cat B-9600

**\$12<sup>95</sup>**

# DICK SMITH Electronics

SEE PAGE 98 FOR ADDRESS DETAILS



DSE/A413/LM

disc and player will be trouble-free. It contains new and critical technology and will inevitably bring with it a whole new set of mechanical and electronic bugs. But they will be bugs of the go/no-go type; once they are corrected, the player will tend to revert to specifications.

In a curious way, the descriptions "analog" and "digital" apply not only to signal processing in the traditional phono and compact disc; it applies also to the operation of the respective decks!

One final point should be made, however: the coming of the compact disc will not mean an automatic feast of "perfect" recorded sound.

What comes off the disc can only be as good as the source. Things that go amiss in the performance, in the acoustics, in the mic placement, in the panel work and the mastering will be heard more

clearly than ever. What's more, I guess that a lot of existing music will be transferred to CD, because it is music that listeners want to hear.

The vital point is that, good, bad or indifferent, the source sound will not suffer significant further degradation on its way from the master recording to the input terminals of your hifi system. And that's nice to know!

Did I say earlier that off-the-shelf "perfection" might be somewhat dull for the itchy-fingered hifi buff?

On second thoughts, it might be quite a relief to be able to eliminate the player and even the discs themselves as a source of uncertainty in a domestic hifi system.

It might provide one with more time and incentive to agonise about the loudspeakers!

## See no evil, hear no evil . . .

While it is easy to be enthusiastic about the performance specifications of the Compact Disc, some hifi buffs express objection to the whole principle of digital encoding and decoding. They maintain that it produces a subjective degradation in quality which, presumably, does not show up in electrical measurements.

Curiously, recording engineers, who might be expected to be acutely aware of any such shortcoming, do not appear, as a group, to share these misgivings. I specifically asked the Sony people, here to demonstrate the compact disc, about the basic validity of the system. It seemed that, as far as they were concerned, the specifications told it all.

I was also interested to read, in a recent issue of "Gramophone" magazine, a detailed account of an audience reaction test of a digital processing system, involving 50 hifi dealers at a conference in England. Because of the highly contentious nature of the subject, every effort was made to achieve completely "blind" test conditions, with literally no one in a position to influence the responses.

A top quality amplifier system was set up and the subjects were free to select their own discs, the turntable on which they were to be played, and the listening level. The only departure from normal was that the system contained a loop which could divert the signal through a Sony PCM-F1 digital encoder and decoder via a silent switching system, and with the relative gains balanced to within 0.05dB.


The subject was given a small control box with a button affecting the changeover switch and two other buttons marked "A" and "D" (Analog and Digital). The first button did not operate the changeover switch directly but sent a cue to a Hewlett-Packard HP85 computer. By reference to a random number system, the computer then decided which channel to select; in effect, no one in the room knew which channel was operating at any time or whether a changeover had indeed occurred.

However, the information was stored in the computer and subsequently compared with the subject's responses via the A and D buttons. The questions to which the computer had to seek an answer were: (1) Can the subject detect a difference between the two sounds and (2) Can he/she label it in terms of analog and digital?

Statistical procedures had to be applied to the data to minimise the effect of chance and to isolate the apparently significant scores for further analysis and possible re-resting. Without going into all the details, the end result was interesting, to say the least. Of the 43 individuals tested, only five returned "probably significant" scores, indicating that they could probably hear a difference between the two paths. But four of the five returned insignificant scores when they were re-tested.

In the end, out of 60 tests involving 43 people, only one confirmed a score which indicated that he could probably hear a difference between the channels. However, his "A" and "D" verdicts were completely reversed in his two sets of results, indicating that, if he could tell the difference, he was unsure which was which!

# POWER THE SAVINGS OF TRIPLE OUTPUT

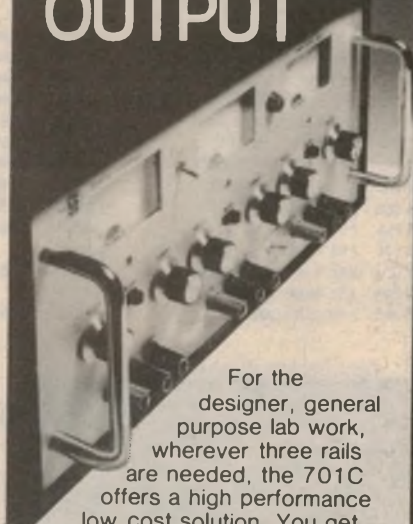

For the designer, general purpose lab work, wherever three rails are needed, the 701C offers a high performance low cost solution. You get three fully variable outputs for less than the cost of three power supplies — with added versatility and convenience.

- Excellent availability, designed and manufactured in Australia.
- Three outputs
  - 0- 8 volts.. 0-4 amps
  - 0-25 volts.. 0-1 amp
  - 0-25 volts.. 0-1 amp
- Panel meters can be switched to monitor voltage or current.
- Voltage and current fully adjustable to zero by Ten Turn controls
- All outputs constant voltage/current limited.
- Automatic crossover
- 25 volt outputs have two modes:
  - (a) Each output completely independent
  - (b) Auto Tracking. The slave (-) tracks the master (+).
- Short circuit proof operation.
- Low cost — high performance.
- Complete product support — Sales, Service, Data.



## Scientific Electronics

6 Holloway Drive, Bayswater, Victoria, 3153  
Tel. (03) 762 5777 Telex AA36308

### Distributors

Victoria, Electro Technics 699 2716  
N.S.W., Electronic Developments, 438 2500  
S.A., Graphic Electronic Industries, 42 6655  
Old, Fred Hoe & Sons 277 4311  
W.A., W.J. Moncrieff Pty. Ltd., 325 5722

THE POWER SUPPLY SPECIALISTS

# WALL CHART

These two pages are invaluable for the Kit Builder and School Master. Printed circuit pricing and month of magazine coming out are included as well as name of kit and project. It not only helps us at Rod Irving Electronics to find the month and number of a kit, but also shows the incredible range we have available. Others say they are No. 1 for kits but we get on with the job, the range below proves it. Please note some of the older projects are in limited supply and might take longer to deliver. The challenge of building a kit as well as the knowledge gained from it, is invaluable, I would say that practical practice in electronics is the true key to successful understanding:-  
 May we all strive a bit harder for 1983 to make Australia a better country.


Rod Irving

## REVISED 17th DECEMBER 82

Kit No.	Description	Price	Month	Price	Kit No.	Description	Price	Month	Price
ET 014	4.90 DUAL VOLTAGE POWER SUPPLY		DEC71		ET 528	2.90 INTRUDER ALARM		JAN75	
ET 043	2.50 HEADS OR TAILS	3.90	OCT76		ET 539	3.90 TOUCH SWITCH		MAR76	
ET 044	2.50 TWO TONE DOORBELL	4.90	OCT76		ET 541	3.90 TRAIN CONTROLLER		MAY76	
ET 047	2.50 MORSE PRACTICE SET	3.90	DEC76		ET 547	3.50 TELEPHONE BELL EXTENSION		JUN77	
ET 048	2.50 BUZZ BOARDS	4.50	DEC76		ET 549A	3.90 METAL DETECTOR		MAY77	
ET 061	2.50 SIMPLE AUDIO AMP	5.90	OCT76		ET 560	2.50 240V MAINS LOCATOR		MAY80	
ET 062	2.90 SIMPLE AM TUNER	6.90	MAR77		ET 561	3.90 METAL DETECTOR		MAR80	34.00
ET 063	2.90 ELECTRONIC BONGOS	5.90	NOV79		ET 562	3.90 GEIGER COUNTER		APR80	
ET 065	2.90 ELECTRONIC SIREN	5.90	DEC79		ET 563	4.50 NICAD FAST CHARGER		JUL80	54.90
ET 066	2.50 TEMP ALARM	5.50	DEC79		ET 566A	2.90 PIPE & CABLE LOCATOR		APR80	
ET 068	2.90 LED DICE	6.90	OCT76		ET 566B	4.90 PIPE & CABLE LOCATOR		APR80	
ET 071	2.50 TAPE NOISE LIMITER		JUN79		ET 567	4.50 CORE BALANCE RELAY		APR81	44.50
ET 072	2.50 TWO OCTAVE ORGAN	9.50	JUN78		ET 568	2.90 PHOTO FLASH TRIGGER		OCT80	26.50
ET 083	2.50 TRAIN CONTROLLER		DEC79		ET 570A	2.90 INFRARED 'TRIP' RELAY TX		JAN82	24.50
ET 084	2.90 CAR ALARM	13.50	JAN77		ET 570B	3.20 INFRARED 'TRIP' RELAY RX		JAN82	
ET 333	3.90 REVERSING ALARM		JAN82	10.00	ET 572	4.90 DIGITAL PH METER WITH PROBE		DEC80	109.00
ET 334	AUTO TESTER		JAN83		ET 573	4.50 UNIVERSAL TIMER		OCT79	
ET 363	3.50				ET 576	8.90 ELECTROMYOGRAM		TPV6	89.00
ET 417	2.90 OVERLOAD INDICATOR		AUG73		ET 577	3.50 GENERAL PURPOSE POWER SUPPLY		TPV6	39.50
ET 438	3.90 LED LEVEL METER	12.95			ET 578	3.90 SIMPLE NICAD CHARGER		JUN80	
ET 440	8.50 25 WATT STEREO AMP		MAR75		ET 581	3.25 15V DUAL POWER SUPPLY		JUN76	17.50
ET 445	2.90 GENERAL PURPOSE PREAMP		JUL76	8.25	ET 583	2.90 MARINE GAS ALARM		AUG77	
ET 446	3.90 STEREO LIMITER		JUL76		ET 585R	2.90 ULTRASONIC RECEIVER		TPV6	17.95
ET 449	2.90 MIKE PREAMP		MAY77		ET 585T	2.90 ULTRASONIC TRANSMITTER		TPV6	10.95
ET 450A	3.90 BUCKET BRIGADE		DEC77		ET 591A	UP/DOWN DIGIT COUNTER		JUL78	
ET 450B	3.90 BUCKET BRIGADE		DEC77		ET 591B				
ET 452	GUITAR PRACTICE AMPLIFIER		JAN80		ET 596	2.90 WHITE NOISE GENERATOR		NOV81	8.00
ET 453	2.90 AMP CLASS B GEN PURPOSE		APR80		ET 598	TOUCH SWITCH		FEB81	10.00
ET 454	3.90 FUZZ BOX		APR80		ET 598B	2.50 TOUCH SWITCH		FEB81	
ET 455	4.50 LOUD SPEAKER PROTECTOR	32.50	MAR80		ET 599A	2.50 INFRA RED REMOTE CONTROL		MAY80	76.00
ET 457	2.90 SCRATCH & RUMBLE FILTER		SEP80		ET 599C	2.90			
ET 458	4.90 LED LEVEL METER	27.00	JUN81		ET 599D	2.20 IR REMOTE CNTRL POWER SUPPLY		MAY80	
ET 459A	16.50 SERIES 5000 1/3 OCT GRAPH EQU	189.00	NOV82		ET 603	4.90 MUSIC SYNTHESIZER SEQUENCER		AUG77	
ET 459B	16.50				ET 604	4.50 METRONOME		SEP77	
ET 461	3.90 BALANCED INPUT PREAMP	20.00	DEC82		ET 606	3.90 ELECTRONIC TUNING FORK		NOV79	
ET 466	8.50 300W AMP MODULE	63.00	FEB80		ET 607A	2.90 SOUND EFFECTS GENERATOR		AUG81	12.50
ET 467	6.90 4 INPUT MIKE PREAMP	27.50	JUL80		ET 607B	2.90 SOUND EFFECTS GENERATOR		AUG81	
ET 470	3.50 60 WATT AMP MODULE SERIES 4000	26.00	TPV6		ET 631	2.750 KEYBOARD ENCODER		APR77	
ET 471	9.90 AUDIO PREAMP SERIES 4000	49.50	TPV6		ET 635	4.90 COMPUTER POWER SUPPLY		APR81	
ET 472	3.90 POWER SUPPLY FOR SERIES 4000	14.90	TPV6						
ET 473	5.90 MOVING COIL PREAMP SERIES 4000	54.00	TPV6						
ET 474	2.90 INTERFACE 60W AMP		JAN80						
ET 475	5.90 AM TUNER	99.00	SEP80						
ET 476	7.90 SERIES 3000 AMP 25W STEREO	84.00	NOV80						
ET 477	4.90 SERIES 5000 PWR AMP MOD 150W	58.50	JAN81						
ET 478MB	13.90 SERIES 5000 PREAMP MAIN BOARD	299.00							
ET 478MC	4.90 MOVING COIL PREAMP (5000)	24.50	SEP81						
ET 478MM	4.90 MOVING MAGNET PREAMP (5000)	18.50	SEP81						
ET 478SA	2.90 SERIES 5000 PREAMP SWITCH BRD		OCT81						
ET 478SB	1.90 SERIES 5000 PREAMP SWITCH BRO		OCT81						
ET 478SC	1.90 SERIES 5000 PREAMP SWITCH BRD		OCT81						
ET 478SD	1.90 SERIES 5000 PREAMP SWITCH BRO		OCT81						
ET 479	3.50 SERIES 5000 BRIDGING ADAPTOR	12.90	MAR82						
ET 480	3.90 50 WATT AMP MODULE	17.50	30AP						
ET 480PS	2.90 50-100W AMP MODULE PWR SUPPLY	22.00	30AP						
ET 481M	3.95 HI-POWER P/A GUITAR AMP MOD.	30AP							
ET 481PS	4.90 12V/100 P/A INVERTER	30AP							
ET 483	4.50 SOUND LEVEL METER		FEB78						
ET 484	5.90 EXPANDER COMPRESSOR 30 A.P		JUL77						
ET 485	5.25 GRAPHIC EQUALISER		JUN77						
ET 486	4.90 HOWL ROUND STABILIZER	59.00	NOV77						
ET 488	7.90 60W AMP MODULE		JAN83						
ET 489A	3.50 AUDIO SPECTRUM ANALYSER N02		APR78						
ET 489B	3.50 AUDIO SPECTRUM ANALYSER N02		APR78						
ET 492	3.90 SOUND BENDER	29.00	FEB82						
ET 494	3.90 LOUD SPEAKER PROTECTOR	24.50	OCT82						
ET 496	SERIES 4000-1 SPEAKER KIT	699.00	FEB80						
ET 499	4.95 50W MOSFET AMP 75-85 TRANSFORMER	79.00	MAR82						
ET 525	ANODISED HEATSINK	42.50							
ET 528	2.90 INTRUDER ALARM		JAN75						
ET 539	3.90 TOUCH SWITCH		MAR76						
ET 541	3.90 TRAIN CONTROLLER		MAY76						
ET 547	3.50 TELEPHONE BELL EXTENSION		JUN77						
ET 549A	3.90 METAL DETECTOR		MAY77						
ET 560	2.50 240V MAINS LOCATOR		MAY80						
ET 561	3.90 METAL DETECTOR		MAR80	34.00					
ET 562	3.90 GEIGER COUNTER		APR80						
ET 563	4.50 NICAD FAST CHARGER		JUL80	54.90					
ET 566A	2.90 PIPE & CABLE LOCATOR		APR80						
ET 566B	4.90 PIPE & CABLE LOCATOR		APR80						
ET 567	4.50 CORE BALANCE RELAY		APR81	44.50					
ET 568	2.90 PHOTO FLASH TRIGGER		OCT80	26.50					
ET 570A	2.90 INFRARED 'TRIP' RELAY TX		JAN82	24.50					
ET 570B	3.20 INFRARED 'TRIP' RELAY RX		JAN82						
ET 572	4.90 DIGITAL PH METER WITH PROBE		DEC80	109.00					
ET 573	4.50 UNIVERSAL TIMER		OCT79						
ET 576	8.90 ELECTROMYOGRAM		TPV6	89.00					
ET 577	3.50 GENERAL PURPOSE POWER SUPPLY		TPV6	39.50					
ET 578	3.90 SIMPLE NICAD CHARGER		JUN80						
ET 581	3.25 15V DUAL POWER SUPPLY		JUN76	17.50					
ET 583	2.90 MARINE GAS ALARM		AUG77						
ET 585R	2.90 ULTRASONIC RECEIVER		TPV6	17.95					
ET 585T	2.90 ULTRASONIC TRANSMITTER		TPV6	10.95					
ET 591A	UP/DOWN DIGIT COUNTER		JUL78						
ET 591B									
ET 596	2.90 WHITE NOISE GENERATOR		NOV81	8.00					
ET 598	TOUCH SWITCH		FEB81	10.00					
ET 598B	2.50 TOUCH SWITCH		FEB81						
ET 599A	2.50 INFRA RED REMOTE CONTROL		MAY80	76.00					
ET 599C	2.90								
ET 599D	2.20 IR REMOTE CNTRL POWER SUPPLY		MAY80						
ET 603	4.90 MUSIC SYNTHESIZER SEQUENCER		AUG77						
ET 604	4.50 METRONOME		SEP77						
ET 606	3.90 ELECTRONIC TUNING FORK		NOV79						
ET 607A	2.90 SOUND EFFECTS GENERATOR		AUG81	12.50					
ET 607B	2.90 SOUND EFFECTS GENERATOR		AUG81						
ET 631	2.750 KEYBOARD ENCODER		APR77						
ET 635	4.90 COMPUTER POWER SUPPLY		APR81						




E.A. Feb 83 Wheatstone Bridge \$45.00

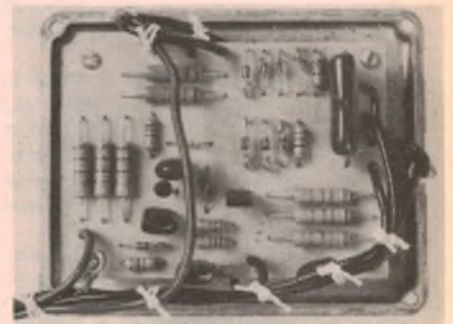

E.A. Feb 83 Transistor-assisted Ignition \$35.00



ET 670	11 00LOW COST MICRO KEYBOARD	MAY82		80LS12	3 50 SELECTALOTT	DEC80	22 00	82VX4	3 50 VOX	APR82	15 00
ET 682	79.00VERSATILE EPROM CARD	MAR81	115 00	80LBR12	2 90 LIGHT BEAM RELAY	NOV80	13 00	82PT4	3 90 PHOTOGRAPHIC TIMER		48 00
ET 686	9 50 PPI BASED EPROM PROGRAMMER	OCT82	48 00	80PC4	2 90 POWER HEAT CONTROLLER	APR80		82IV5	5 40 12 240V INVERTER 40 WATT	MAY82	49 50
ET 708	2 90 AERIAL AMP	MAR76		80PC7	3 50 POWER SAVER INDUCTION MTR	JUL80		82P5	5 90 UNIVERSAL PREAMP MM/MC	MAY82	35 00
ET 713	4 90 FM TUNER ADD ON	SEP77		80FB12	2 90 GUITAR FUZZ BOX	FEB81	19 90	82T05	3 90 TACHO/DWELL METER	MAY82	62 00
ET 717	4 50 CROSSHATCH GENERATOR	MAY78		80G6	5 90 MUSICAL TONE GENERATOR	JUN80		82TS3	3 90 LOW COST TOUCH SWITCH	MAY82	12 00
ET 726	3 50 R.F AMP 70W 6/10 METER	FEB80		80GSP3	2 90 VOLTAGE REGULATOR MULTI	MAR80		82GA3	9 90 GUITAR BOOSTER	JUN82	17 50
ET 729	UHF TV MASTHEAD AMP	APR81	36 00	80AD12	3 00 AUTODIM LIGHT DIMMER	DEC80		82EM6A	4 90 THEREMIN	JUN82	34 50
ET 730	UHF TV CONVERTER	MAY81	37 50	80AU3	3 50 HI FI AUTO TURN OFF	MAR80		82IV6	6 90 12 240V INVERTER 300 WATT	JUN82	189 00
ET 731	4 50 TELETYPE MODULATOR	OCT79		80AW4	4 50 RECEIVER ALL WAVE	APR80			POWER MONITOR	JUL82	18 00
ET 735	4 90 UHF TO VHF CONVERTOR	MAY81		80TM8A	6 90 DIGITAL ENGINE ANALYSER	AUG80	48 50	82HB6	3 90 LCD HEART RATE MONITOR	JUL82	
ET 760	2 50 VIDEO MOD TO SUIT 660 MICRO	OCT81	14 50	80TMB8	2 90	AUG80		82CC7A	15 50CAR COMPUTER	JUL82	109 00
ET 824	2 90 SLOT CAR POWER SUPPLY	DEC81	19 50	80PP7A	8 50 EPROM PROGRAMMER	JUL80	77 50	82CC7B	4 00 CAR COMPUTER	TO	
ET 825	5 90 SLOT CAR CONTR (NO CASE)	DEC81	59 00	80PP7B	2 90 EPROM PROGRAMMER	JUL80				SEP82	
ET 905	16 00POLYPHONIC ORGAN	JAN83		80RF5	2 90 RUMBLE FILTER	MAY80		82DP6	4 90 DECIMAL POINT FOR D F METER	JUL82	70 00
ET 1501A	2 90 NEGATIVE ION GENERATOR	APR81	39 00	8RM12	3 90 CYLON VOICE SIMULATOR	DEC80	19 95	82PA7	9 50 SUB WOOFER AMP	JUL82	85 00
ET 1501B2	90 NEGATIVE ION GENERATOR	APR81		80SA3	5 90 PLAYMASTER STEREO AMP	MAR80		82UR8	3 90 ULTRASONIC RULE	AUG82	49 00
ET 1501C2	00 NEGATIVE ION GENERATOR	APR81		80CH7	8 50 240V A.C. LIGHT CHASER	JUL80		82MS8	6 50 STEREO SYNTHESISER	SEP82	55 00
ET 1503	3 90 BATTERY CHARGER	AUG81		80RM12	3 90 RAM EXPANSION FOR DREAM	DEC80	39 00	82EF9	4 90 ELECTRIC FENCE	SEP82	19 50
ET 1508	MODEL TRAIN CONTROLLER SINGLE DOUBLE	DEC82	115 00	80PA6	7 50 PLAYMASTER 300W AMP. MODULE	JUN80	63 00	82PC8	2 00 FLOURESCENT STARTER	OCT82	5 00
ET 1509	D.C D.C INVERTER	SEP82	39 50	80CL4	3 50 TIMER CONTROLLER	APR80		82FC8A	6 50 DIGITAL READOUT	OCT82	72 00
ET 1510A	MODEL RAILWAY POINTS	JAN83		80TRS11	2 90 TRS 80 PRINTER SERIAL IN	NOV80	15 00	82FC8B	3 90 FOR SHORT WAVE		

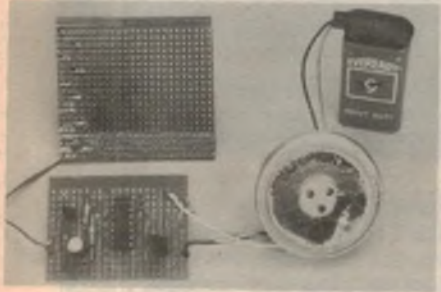

**E.A. Feb 83 Moisture Alarm \$12.00**

ET 1510B	CONTROLLER AND INDICATORS		
EA 6800	14 506800 MICRO COMPUTER	115 00	
EA 6802	14 506802 MICRO COMPUTER	115 00	
	POWER SUPPLY TO SUIT	35 00	
	HEX KEYPAD 19 KEYS	35 00	
75CD7	3 50		
75L11	2 50		
78C5	4 90		
78A06	3 90		
78N6	3 90		
78T3	4 50 PHOTO TIMER	MAR78	
78NG4	2 90 PINK/WHITE NOISE GEN	APR78	
78UT4	4 50 LOW COST VDU KEYBOARD	APR78	
78UP10	9 50 2650 EXTRA RAM	OCT78	
79SB10	3 90 BASS FILTER	OCT79	
79FE11	2 50 PHOTO FLASH EXPOSURE MTR	NOV79	24 50
79PC9	3 90 PULSE GENERATOR	SEP79	
79SE3	3 90 TRAIN MODEL SOUND	MAR79	
79T11	2 90 TRANSISTOR ASSISTED IGN	NOV79	32 50
79PS11	2 90 EXPERIMENTORS POWER SUP	NOV79	
79PC12	2 90 FAN SPEED CONTROL	DEC79	
79SF10	2 50 PHOTO SLAVE FLASH	OCT79	
79SF9	2 90 PHOTO SOUND TRIGGER	SEP79	
79UPS6	3 50 UNIVERSAL POWER SUPPLY	JUN79	29 50
80ST10A	3 50 STYLUS TIMER	OCT80	
80ST10B	2 50 STYLUS TIMER	OCT80	
80TC12	2 90 BIPOLAR TRAIN CONTROLLER	DEC80	28 00
80CM3A	4 50 DIGITAL CAPACITANCE MTR	MAR80	45 00
80CM3B	2 50	MAR80	
80PG6	6 50 T.V. PATTERN GENERATOR	JUN80	59 50
80TV8	3 90 T.V. CRO ADAPTER INC P/PACK	AUG80	38 50
80F3	3 20 AUDIO PRESCALER	MAR80	
80PP3	2 50	MAR80	
80LL7	3 90 LEDS & LADDERS	JUL80	19 50
80B7	2 50 BEAT FREQUENCY OSCILLATOR	JUL80	
80BM10	2 90 CAR BATTERY MONITOR	OCT80	9 50
80SA10	9 90 STEREO AMP MOSFET	JAN81	169 00
80DC10	6 50 DIGITAL STORAGE CRO AD	NOV80	78 00
80GA12	6 50 GUITAR AMPLIFIER	DEC80	
80HLA5	2 90 CAR HEADLIGHT ALARM	MAY80	

81DC2	2 90 LE GONG DOORBELL	FEB80	14 95
81DT5	3 00 DREAM TAPE CONTROLLER	MAY81	
81GA3	11 50COLOUR GRAPHIC ANALYSER	MAR81	109 00
81UC8	4 50 UNIVERSAL TIMER & STOPWATCH	AUG81	
81MP6	3 90 MICROPROCESSOR POWER SUPPLY	JUN81	
81IR4A	4 50 INFRA RED RELAY	APR81	39 00
81IR4B	2 90 INFRA RED RELAY	APR81	
81SP1	2 90 RS232 TRS80 SYSTEM 80 INTFCE	JAN81	
81SI3	7 90 TRS80/SYSTEM 80 SERIAL INTFCE	MAR81	
81SW	3 90		
81MC7	2 90 MOVING COIL PREAMP	JUL81	
81RM2	2 50	FEB81	
81DC3B	8 50 DIGITAL AND	NOV80	189 00
81DC3A	9 50 ANALOGUE STORAGE CRO	MAR81	
81WS10	3 90 WIND SPEED INDICATOR	OCT81	52 50
81P6	2 90 POOL/LOTTO SELECTOR	JUN81	22 50
81A010	3 50 AUDIO TEST UNIT CASS. DECK	OCT81	47 50
81MC8	10 90MUSICOLOUR IV	AUG81	84 00
81SG9	4 20 LED SANDGLASS	SEP81	22 50
81C9	DIGITAL CLOCK THERMOMETER	SEP81	80 00
81SS11	6 90 SLIDE CROSS FADER	NOV81	89 50
81GA9	4 90 PHOTON TORPEDO GAME	SEP81	24 50
81UC8	4 90 UNIVERSAL TIMER	AUG81	
8MC7	9 50 MOVING COIL PREAMP	JUL81	
8SW7	4 90 TRAIN STEAM WHISTLE	JUL81	17 50
81SM7	3 90 BAGATELLE	JUL81	
81VM2	2 90 HIGH IMPEDANCE DC VOLT/MTR	FEB81	
81CC5	2 90 PC BIRDIES	MAY81	14 50
81HB4A	7 50 HEART RATE MONITOR	APR81	79 00
81HB4B	3 50 HEART RATE MONITOR	APR81	
81A06	4 90 AUDIO OSCILLATOR	JUN81	59 00
81MA4	4 50 TOUCH SENSITIVE ALARM	APR81	
81RC4A	4 90 INFRA RED REMOTE CONTROL	APR81	72 00
81RC4B	2 50 INFRA RED REMOTE CONTROL	APR81	
81RC4C	2 75 INFRA RED REMOTE CONTROL	APR81	
81SP5	2 90 SOUND PRESSURE METER	MAY81	37 00
81OR7	9 50 ELELECTRONIC ORGAN	JUL81	59 00
81CH12	3 50 CHRISTMAS DECORATION	DEC81	15 00
81mi10A	4 90 500MHZ DIGITAL FREQ. MTR	DEC81	135 00
81mi10B	3 50 500MHZ DIGITAL FREQ. MTR	OEC81	
811d12	4 50 LED BAR GRAPH DISPLAY	DEC81	
81mi11	2 90 METRONOME (LOW CURRENT)	JAN82	16 90
81wd12A	3 50 WIND DIRECTION INDICATOR	JAN82	24 50
81wd12B	3 50		
82EP1	12 50FREE STANDING EPROM PROGRAMMER	JAN82	45 00
	WITH '24 PIN' TEXTTOOL SOCKET		55 00
	AND AC PLUGPACK		69 50
82TH2	3 90 DIGITAL THERMOMETER	FEB82	69 00
82CR1	13 50 LGE SCR.N. STORAGE CRO ADAPTER	FEB82	119 00
82EG2	2 90 CUDLIP	FEB82	12 00
82PS2	4 90 DUAL TRACKING POWER SUPPLY	MAR82	83 50
82LF2	3 90 LOW FUEL INDICATOR	MAR82	16 50
82CM3	3 50 LCD CAPACITANCE METER	MAR82	69 00
82A03A	7 90 FUNCTION GENERATOR	APR82	79 50
82A03B	3 90	APR82	
82VC3	3 50 VOICE CANCELLER	APR82	22 50

82PH2	2 90 DIGITAL PH METER	DEC82	115 00
82EG12	2 90 BOGGLE GOGGLES (SHORT FORM)	DEC82	9 60
83TV1A	4 90 REMOTE INFRARED TV	JAN83	39 50
83TV1B	2 90 SOUND CONTROL	JAN83	
83TV1C	2 90	JAN83	
83PS1	2 90 PLUGPACK REGULATOR WITH PLUGPACK	JAN83	12 00
			26 50
83EG1	3 50 LED HEAD LIGHT CHASER	JAN83	12 00
HOBBY ELECTRONICS			
HE102	3 50 GUITAR PHASER	JUN81	25 00
HE103	TRANSISTOR TESTER		9 40
HE104	2 90 A.M. TUNER	MAY81	7 50
HE105	2 90 BASIC AMPLIFIER	MAY81	9 50
HE106	2 90 F.M. RADIO MICROPHONE	MAY81	8 50

<b>E.A. Feb 83 Tuner Alignment Kit \$8.00</b>			
HE107	3 90 ELECTRONIC DICE	JUN81	5 95
HE108	2 90 POWER SUPPLY		11 95
HE110	UNMISTAKABELL		6 90
HE111	OHMETER		19 90
HE112	2 20 MICROMIXER		11 90
HE113	2 50 WATER ALARM		9 45
HE114	3 50 DIGITAL COUNTER	OCT81	14 50
HE115	2 50 REACTION TIMER		
HE117	HOUSE AND CAR ALARM		16 90
HE121	2 50 SCRATCH AND HISS FILTER		9 00
HE123	3 90 ALIEN INVADERS		
HE126	2 50 NICAD CHARGER (P/PACK EX \$9.95)		
HE127	SIREN		3 90
HE128	FOG HORN		
HE129	2 50 SIMPLE TUNER		
DIGITAL RESEARCH S100 & SS50 BOARDS			
S100	16K RAM BOARD		\$69 00
S100	32K EPROM BOARD		\$69 00
S100	64K RAM BOARD		\$110 00
SS50	16K RAM BOARD		\$69 00
SS50	64K RAM BOARD		\$110 00

**ROD IRVING**

425 HIGH STREET, NORTHCOTE 3070. MELBOURNE (03) 489 8131.  
48-50 A'BECKETT STREET, MELBOURNE, 3000.





As demonstrated recently in Australia, Sony's model CDP-101 compact disc player. Currently, about 20 manufacturers are offering CD players on the Japanese domestic market.

Ready for immediate release:

# The COMPACT DISC

1983 has already been accorded the title "The year of the compact disc". For those who have not caught up with this important new development in audio-hifi, this deliberately basic article should put you into the picture and prepare the way for further detailed discussion of compact discs and compact disc (CD) players.

by NEVILLE WILLIAMS

For something like 100 years, domestic phonographs or gramophones have depended on audio signals preserved as a "wiggly" groove inscribed in the surface of a rotating cylinder or a spinning disc.

For replay, the groove is traced by a "needle" or stylus which, in the days of the acoustic phonograph, transferred the tiny deviations in the groove to a flexible diaphragm at the small end of an acoustic horn. Since the early '30s, however, the preferred method has been to use a stylus in a phono "pickup" which generates an electrical signal suitable for feeding into an audio amplifier system.

By way of illustration, imagine that

one brief segment of a sound reaching the studio microphone produces a pressure wave as in Fig. 1a. As recorded in the groove of a normal monophonic disc record, that same segment of sound could be expected to produce a groove deviation of recognisably similar shape (Fig. 1b). Later, when sensed by a pickup — or phono cartridge — an equivalent electrical signal would be produced (Fig. 1c).

Looking at the three curves, one might well observe that the groove resembles a continuous graphical plot of the original sound pressure wave and that, when replayed by a phono cartridge, it produces a continuous elec-

trical signal of equivalent contour.

These days, in technical discussion, we tend not to use the word "continuous" to describe a waveform, referring to it instead as an "analog" waveform.

The term has been inherited largely from computer technology, where a minority of computing systems, which sense and react to quantities in a continuous way, are described as analog computers. It distinguishes them from all the rest, which receive and process data as a stream of samples or units. These are described as digital computers.

As we shall see later, the word "digital" has also entered hifi jargon and is very pertinent to the subject we are leading up to. But more of that later.

All phono discs to date are basically analog, because they use a continuous groove whose contours are physically related to the contours of the original sound wave. (To use a more familiar word from the same root, the curves could be described as analogous.)

All normal open-reel and cassette tape recorders are analog in principle,

because there is a direct and continuous equivalence — or analogy — between the original sound pressure wave and the intensity of the magnetic pattern on the tape.

In fact, until quite recently, every aspect of sound recording and reproduction was analog, because it seemed to be the obvious way to do things and the only way that was practical, anyway, with available technology!

Just in passing, someone might object that Fig. 1 is an over-simplification; that stereo grooves are more complex than those illustrated; further, that the use of recording and playback frequency compensation affects waveshapes. Both observations are true but the point we want to draw is more easily seen from the simple case — and it holds for all the rest!

In an ideal record/replay system, the recovered signal should be exactly equivalent to — or a precise analog of — that delivered by the recording microphone(s). Unfortunately, the ideal is easy to state but virtually impossible to attain with a conventional disc recording system.

## PRACTICAL PROBLEMS

If the recording amplifier and groove cutting stylus system do not respond precisely and proportionately to the drive signal, the contours of the groove will be slightly misshapen.

Similarly if, for any reason, the replay stylus does not follow the same relative path as the cutting stylus, a further lack of equivalence will be evident between the recovered and original signal.

It transpires that incorrect contours in the original groove, and a deviation by the playback stylus from its true path, generate additional and spurious frequencies which are usually multiples of the actual signal frequency. The phenomenon is therefore described as "harmonic distortion" and is something that needs to be minimised, not only in disc records but in all aspects of sound amplification.

Special instruments and procedures are used to measure harmonic distortion and the performance of items of audio equipment in this respect is commonly expressed by summing all the harmonics present and quoting a figure for total harmonic distortion. Commonly, this is reduced to the initials "THD" and is expressed as a percentage — the smaller the better!

As you may have gathered from those last two paragraphs, the generation of harmonic distortion is a potential problem right through an amplifier chain, but it is particularly troublesome in an analog disc system and, for that matter, in an analog tape system as well!

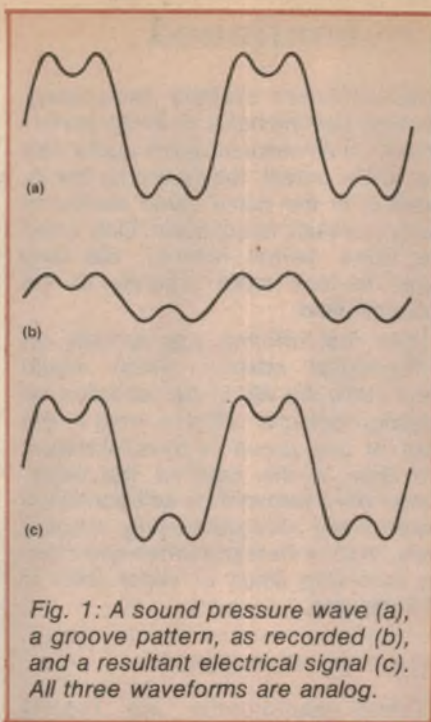


Fig. 1: A sound pressure wave (a), a groove pattern, as recorded (b), and a resultant electrical signal (c). All three waveforms are analog.

Unfortunately, the analog disc system suffers from quite a few other problems and these could be summarised as follows:

**TRACING DISTORTION:** Occurs when, for any reason, the stylus vibrates within the groove, instead of following its precise contours. It produces a buzzing effect, commonly described as an unpleasant "edge" on orchestral strings, massed voices, etc.

**NON-LINEAR FREQUENCY RESPONSE:** Results from resonance effects involving the arm and/or cartridge, reactive effects in the wiring and associated circuitry, groove tracing problems, etc. Frequency response should ideally be flat over the full audible bandwidth but is normally expressed as: within or " $\pm$ " so many dB — the smaller the figure, the better!

**SURFACE NOISE:** Results from anomalous movement of the stylus caused by foreign particles in the groove, surface scratches, roughness of the groove walls and the texture of the record material itself. Spurious impulses resulting from any of these causes are inseparable from the wanted signal and are amplified along with it.

**LIMITED DYNAMIC RANGE:** The ratio between the loudest peaks in a musical or other program and the softest passages is referred to as the "dynamic range" and is expressed in decibels. Existing analog records have difficulty in accommodating the dynamic range of some program

material, because the loudest passages may produce an overload condition — a sharp rise in THD — while the softest passages are masked by the system noise.

**LIMITED SIGNAL/NOISE RATIO** expresses much the same relationship in a slightly different manner: the ratio in decibels between the largest signal that a record/replay system will handle, without severe distortion, and the inherent system noise level.

**WOW & FLUTTER:** A wavering quality imparted to the recorded sound when the rotational speed of the turntable is not completely constant. Discs which are slightly off-centre or are warped can also add significant wow to the sound reproduction.

**RUMBLE:** An annoying low frequency hum (or rumble) which results when vibration from a "noisy" or rough-running turntable drive mechanism or support bearing reaches the stylus and cartridge and produces a spurious low frequency signal. Uneven flow and cooling of the hot vinyl during pressing of phono discs also leads to what is known as "pressing rumble" and this is often worse than the rumble due to typical turntables.

**MICROPHONICS,** sometimes referred to as acoustic feedback. When acoustic energy from the loudspeakers produces vibration of the turntable or the arm and cartridge, it can exaggerate certain low frequencies, producing a drumming effect or even a sustained roar when the volume control is advanced.

**RECORD WEAR, FOULING:** Present-day records do wear gradually with repeat playing, can be damaged by worn styli and careless handling, and can be rendered noisy by foreign particles in the grooves.

## ANOTHER APPROACH?

A recital of such potential problems makes the analog disc record system sound very unattractive and, indeed, up till the end of the 78rpm era, it provided plenty to complain about. However, over the last 30-odd years, analog disc technology has made enormous advances, to the point where the best discs played on the best equipment are very good indeed.

But the best equipment is expensive — in extreme cases, ludicrously so. Only a limited number of records are of top quality, and care is needed to keep them in pristine condition, free from dust, unmarked and unworn.

At the heart of the problem is the fact that the analog disc system, by its

## THE COMPACT DISC — continued

nature, is inherently prone to all these problems and the job of winning small further improvements in performance is running up against the law of diminishing returns.

We have just about reached the end of the line!

Is it not possible, then, to envisage a whole new approach which will, at one stroke, diminish or even banish some or all of these problems?

### THE ALTERNATIVE

The answer is "yes" and the alternative approach is described by that other word inherited from computer lore: "digital". We'll explain the term in detail later but, in the meantime, let's continue on with the main theme.

Well aware of the rapid developments in digital technology, audio engineers began to realise that it might offer a way around the intransigence of the analog system but they could foresee one major deterrent: the digital method would require a domestic-level record/replay medium having a frequency response far wider than any analog system — running into megahertz rather than kilohertz!

In fact, just such a facility turned up a few years ago in the form of a home video cassette recorder. Even more interestingly, the VCR was followed by video discs which were designed and priced for home use, with a playing time of about an hour, and carrying signal frequencies into the megahertz range.

Manufacturers realised immediately that they had the basis for a high performance, multi-channel digital audio disc but, at the outset, they were far too interested in the home video market to worry too much about audio. Only when the video market faltered, did they begin to look more urgently to the audio/hifi field.

Their first offering was actually an analog/digital adaptor which would allow audio signals to be recorded on existing domestic VCRs — VHS in the case of one group of manufacturers, and Beta in the case of the other. These were followed by self-contained stereo audio recorders using, respectively, VHS or Beta cassettes and offering recording times of either 240 or 215 minutes.

### WHAT TO RECORD?

These equipments are readily available but are used mainly for small studio mastering work. There is little point to their use in domestic situations, because private recordists seldom have access to material to match their very advanced performance specifications.

In the area of video-based audio discs, it looked very much for a while as if consumers might be faced with the unwelcome choice of three different formats. Early thinking was that it would be logical to make the new high-performance digital audio discs com-

patible with the video format, so that the same player could be used for both. This could have meant audio discs based on the CED format developed by RCA, the VHD format (JVC-Matsushita) and the LV format (Philips, Sony).

Fortunately, Philips and Sony took a different view, based on the wise assumption that the hifi industry could not afford a repeat of the quadraphonic debacle. They suggested that any new style audio disc should be of small rather than large diameter — for example 12cm instead of 12in. This would encourage the production of compact playing decks and may even permit the use of such records in cars.

The new record, they maintained, should use their laser principle to eliminate the problem of record wear and also to substantially obviate problems with finger marks, surface scratches and dust. It should — and could — have a flat frequency response, very little distortion, very low noise level and high dynamic ratio, no stylus tracking problems, no wow or flutter, no rumble and no acoustic feedback.

In mid 1980, Philips and Sony made a formal presentation of the proposed system to the world hifi industry and put up a very convincing case. Indeed, it was so convincing that, without necessarily closing off their own options, something like 40 companies took out licences to manufacture hardware and software for what has come to be known as the Compact Disc (CD) system.

(At the outset, Sony seemed rather keen on the name "Digital Audio Disc" — abbreviated to DAD — but Philips appear to have got their own way with "Compact Disc", as a companion device to the Philips-developed "Compact Cassette").

### WIDE SUPPORT

Without trying to list all the names of current CD licences, those which are most familiar in Australia include (in alphabetical order): Akai, Bang & Olufsen, Dual, General Corp, Grundig, Hitachi, Matsushita (National, Technics), Mitsubishi, Nakamichi, Nippon Marantz, Onkyo, Philips, Sansui, Sanyo, Sharp, Sony, Studer-Revox, Teac, Toshiba, Trio, CBS, Nippon Columbia, Pioneer, Polygram and Toshiba-EMI.

In the two years or more that have followed the signing of the licensing agreements, the companies concerned have been hard at work developing their own techniques and their own prototypes, and generally adding to their store of knowledge and resources.

Indeed, through most of '82, it seemed that everyone was getting ready to swim, but that no one wanted to be the

## WAVEFORMS AND CONTOURS

Listening to the complex sound which often emerges from a hifi system, readers are often nonplussed by the thought of a stylus which is required to vibrate "at all those frequencies at the one time". It may be helpful, in understanding the present article, to think in another way of what goes on.

When an orchestra is playing the auditorium is normally filled with a complex pattern of sound waves, most of which impinge on the listeners' eardrums. Being physical entities, eardrums cannot be in two places at once, nor can they be moving simultaneously in opposite directions. What they do is to take up positions and move in sympathy with the sum of all the individual pressures acting on the drum. The marvel of it is that, given only the sum or the contour of the external pressure wave, the human hearing can reconstitute the component frequencies, along with their relative amplitude and phase.

In microphones, the diaphragm also responds to the instantaneous sum of the pressures affecting it and the unit delivers an electrical output signal which has an equivalent sum or contour pattern.

Similarly, a recording stylus does not record each individual frequency, as such. Deviations in the groove are proportional to the instantaneous sum signal. In effect, the groove is a half-kilometre-long graph of the summed signal, plotted against time — 20 minutes or so. This being the case, it is helpful to consider the replay stylus as having to follow a contour, rather than a countless number of individual frequency waveforms.

The digital record/replay system, which is the basis of the new compact disc, also seeks to analyse and reconstitute sum signals; hence the concern with wave patterns and contours. It's really no different to what is preserved in an analog groove; it's just that it's done in another way!

# The change to excellence in sound...



## needn't cost you a fortune.

Denon, the name associated worldwide with professional audio equipment has available in Australia their range of advanced magnetic tapes. The result of 30 years of research and technology offers the listener true excellence in sound.

Six dynamic tapes - the LX, DX1, DX3, DX5, DX7 and DXM provide a range to suit any requirement in high grade recording and reproduction.

See the exciting range of tapes at your Denon dealer now, you'll find their prices rather exciting as well.

# DENON

*Professional Audio Brand.*



**AMALGAMATED WIRELESS (AUSTRALASIA) LIMITED**  
554 Parramatta Road, Ashfield, NSW 2131 Phone 797 5757


Canberra	Melbourne	Launceston	Adelaide	Brisbane	Townsville	Perth
80 5200	560 4533	44 5155	272 2366	44 1631	79 6155	271 0888

## THE COMPACT DISC — continued




### "SCOPE" MODEL


**SCOPE SUPERSCOPE 150w**  
 CODE:SS  
  
 MANUAL TEMP. CONTROL  
 5 SECOND HEATING

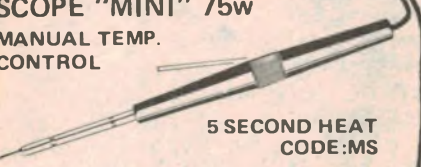
**SCOPE "MINI" 75w**  
 MANUAL TEMP. CONTROL  
  
 5 SECOND HEAT  
 CODE:MS

**METAL ETCHING PEN**  
  
 WRITES ON ANY METAL  
 CODE:MEP

**SCOPE RECHARGEABLE "CORDLESS" — 60 WATT**  
  
 RECHARGE OPTIONS:—  
 a) AUTO CIG LIGHTER  
 b) 240V ADAPTOR  
 c) SCOPE TRANSFORMER ADAPTOR  
 CODE:C60

**SCOPE "TC60" AUTOMATIC TEMP. CONTROL**  
  
 13 TIP SIZES AVAILABLE  
 TEMP RANGE 200-400 C  
 CODE:TC60

**SOLDER REMOVER**  
  
 REPLACEABLE SELF CLEANING NOZZLE  
 CODE:SR3A

**FLUSHCUTTER WITH SAFETY CATCHER**  
  
 HIGH SPEED NEW SHEAR CONCEPT CUTS FATIGUE

**DAVID REID ELECTRONICS PTY. LTD.**  
 SYDNEY:  
 127 York Street, Sydney, 2000 N.S.W.  
 Phone : (02) 29 6601

first to jump in. Then, suddenly, it was on!

Sony led the way in mid-October with an announcement release timed for about March '83. Philips chimed in a few days later, with Marantz circulating their own glossy circular. National/Technics were slightly less forthcoming but lost little time in supplying us with full information on their SL-P10 system. Sharp revealed that they were assessing a model for Australia. And so on.

In short, by the time you've digested this article and pondered for a while over your cash balance, the chances are that the first compact discs and players will have appeared in the major hifi shops to tantalise and unsettle you!

### THE DIGITAL CONCEPT

But, before we say any more about them, let's go back to that word "digital" and see if we can explain what it means.

Instead of preserving the actual signal contour as a groove in a disc, a magnetic pattern on a tape or an optical pattern on a movie film, the digital approach is to "sample" or measure the amplitude of the audio signal at rapid intervals and to record those measurements for future reference.

Using such figures, it is theoretically possible substantially to reconstitute a waveform, when required, without ever having had access to the original.

As an elementary illustration, let's say that the waveform of Fig. 1 is superimposed on a graph, such that its amplitude, plus and minus, is

referenced to the vertical scale, with time displayed on the horizontal scale.

Reading the graph to the nearest whole numbers, for the sake of simplicity, one could record that the signal amplitude at the successive time intervals follows the sequence: 0, +3, +2, +3, 0, -3, -2, -3, 0, +3, +2, +3, 0, -3, -2, -3, 0.

Using those figures, one could construct a waveform such as that shown in Fig. 2b. It could be done graphically or, given a DC voltage source and suitable electronic gadgetry, it could be reconstituted electrically.

It might seem to be a rather futile exercise, because Fig. 2b is only a crude approximation of 2a. However, it is interesting to note that, by trebling the number of readings or "samples" along the time scale, the result is 1c, which looks much more like the original.

It would look even more so, if it were passed through an audio top-cut filter to remove unnecessary high frequency components. The filter would have the effect of rounding off the corners of the sampling steps and producing a smoother waveform, much closer to the original.

As we said earlier, Fig. 2 is intended to be basic and to illustrate a principle. Unfortunately, readers encountering such a diagram for the first time tend to balk at the highly serrated waveform and to assume that that is what is being recovered from a digital recording and fed to the amplifier. Logic says that it must sound coarse or unnatural — and it is an impression that dies hard!

In fact, the sampling rate used for

From the Sharp Corporation:




From the Sharp Corporation, this model DX-3 compact disc player employs vertical front loading, with the disc partly visible on the left. The display at top right shows the relative position of the read head, while the figures below it show the track number being played and the playing time. Along the bottom are the manual controls and the automatic program selection system.

digital sound recording and playback is very high, lying typically in the region 40-50kHz and way above the range of human hearing. It is also normal practice to insert a sharp top-cut filter in the signal recovery (or playback) system, cutting off around 20-22kHz and substantially eliminating all trace of the sampling function from the wanted signal.

The end result is that, for a well designed digital record/replay system — and the compact disc certainly qualifies for that description — the reconstituted signal contour is a more accurate replica of the source signal than can be achieved by any practical analog system.

This is evidenced repeatedly by figures for total harmonic distortion (THD) which are improved by one to two orders of magnitude — 10 to 100 times — compared with signal sources normally available in the home. (Sony quote 0.01% max. THD for a CD disc and player, and 1.0% min. THD for an LP disc and player).

(One should hasten to add that this does not mean an improvement of that order in the sound as heard, because the perceived quality is still limited by the loudspeaker system, the acoustics of the listening room and even the listener's own ears. What it does mean is that the performance of the disc source becomes commensurate with

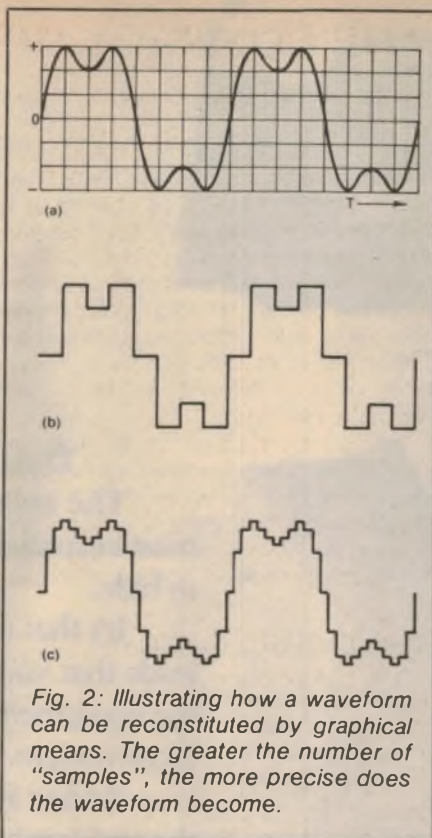

*Fig. 2: Illustrating how a waveform can be reconstituted by graphical means. The greater the number of "samples", the more precise does the waveform become.*

that of the amplifier and ceases to be the potential liability that it traditionally has been.)

Results of this order are possible only


because very advanced technology has been developed for the specialised task of sampling the signal to be recorded and turning it into a string of numbers — a process described as A/D or analog/digital conversion. It is, of course, fundamental to the production of the compact disc.

The reverse process takes place in every compact disc player: D/A or digital/analog conversion, to produce an analog signal suitable to feed into a standard hifi system. What has made it all practical, even routine, is the LSI or large-scale integrated circuit, which compresses A/D and D/A conversion — indeed the whole audio "numbers" game — on to a few mass-produced silicon chips, each containing typically thousands of transistors.

But that is only the beginning; the "numbers game", as we have described it, draws heavily on computer techniques, with numbers translated into the zeros and ones of the binary system and into a lightning-fast stream of information "bits" — assembled, stored, shuffled, processed and fed out again, like any other digital computer data. What that means in detail must form the subject of a separate article but certain points can be highlighted for our present purpose.

Like any other digital procedure, the emphasis is directed primarily at preserving intact the information pattern

## The new JBL L15. Its sound will take your breath away. Its price won't.




If you think high performance audio has to be expensive or large, we've got a great surprise for you — the new JBL L15 compact loudspeaker. While only 375 mm (14¾") high, this astonishing 2-way system combines clean, clear, accurate sound with incredible power capacity, high efficiency and ultra-low distortion — all requirements for the digital age. Designed with the aid of computer models and laser interferometry, the JBL L15 does not need a huge amplifier to provide good volume levels; however you can use an amplifier up to 100 watts/channel. At any volume, the JBL L15 creates a lifelike, three dimensional sound quality.

Finished in oiled American black walnut veneer, the L15 is hand-rubbed to bring out the natural grain structure of the wood. For a detailed brochure or the location of your nearest JBL High Fidelity Dealer, contact:

Harman Australia, LMB 12, PO Nth Ryde  
NSW. 2113. (02) 887 3233.

**\$538** pair.

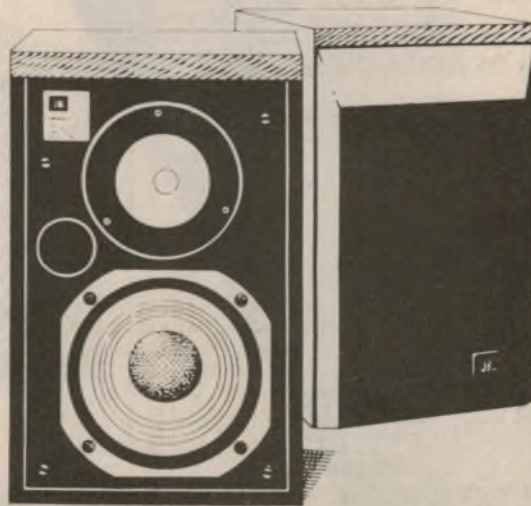

# Why Direct

## Don't tangle with Technics.

The majority of audio systems – even the most beautifully designed – have something ugly to hide.

It's that mass of jumbled-up connecting leads that you find, all too easily, at the rear of the equipment. Not only are they ugly, they're inconvenient, too.

And as audio components become smaller, the problem becomes bigger and more unsightly.

To solve this problem, Technics developed their Direct Connector systems, which eliminate all audio connecting leads between the tuner, amplifier, graphic equalizer and cassette deck.

Each of these components features a special flip-up connector to allow them to be literally plugged in to each other!

It's an elegant piece of Technics technology that results in a stylish, neat installation that can be put together or taken down for re-location in a matter of seconds.

## The 315 Series.

But Direct Connector capability is not the only innovative feature in this new and compact series from Technics.

The SL-5 direct-drive, linear-tracking turntable employs its own plug-in connector system for the pickup cartridge.

This unique Technics development has been adopted as a World Standard.

It means you can compare and evaluate cartridges from leading manufacturers like Audio Technica, Ortofon, Shure, Stanton, Empire, Pickering, ADC and, of course, Technics without conventional setting up procedures.





# Technics developed Connector systems.

No adjustment of tracking weight or bias correction is needed.


The innovations continue in the rest of the components: the SU-5 amplifier includes a Super Bass switch to enhance the bass response of a speaker system without inducing bass boom; the ST-5 quartz synthesizer digital tuner provides random access memory for 16 pre-set stations; the SH-E5 graphic equalizer – offers adjustment of 12 audio bands from 16Hz to 32Hz on each channel; whilst the RS-5 cassette deck – has soft touch controls, auto selection of metal, CrO<sub>2</sub> and normal tape settings plus convenient Cue and Review functions.

Finally, a pair of SB-F5 speakers with horn-type tweeters and bass reflex porting turn the high quality electrical signals of the rest of the system into the high quality sound you expect.

**Compact components, full-size warranty.**

All components in this series are perfectly matched in styling and performance.

And all are covered by a full 2-year warranty backed by Technics' reputation. Visit your Technics stockist soon and experience the superb styling and brilliant sound of Technics' compact Series 315 for yourself.



## Technics

National Panasonic (Australia) Pty Ltd

Expanding the music experience.

## THE COMPACT DISC — continued

of ones and zeros, expressed as the presence or absence of signal at the appropriate time intervals. The linearity of the circuitry or the recording medium plays no part in accurately preserving the waveform contour.

A further point is that modern digital systems do not simply record and decode the raw digital data. During the past decade, computer engineers have devised various ways of reorganising digital data, adding "parity" bits, etc, so that the processing circuitry can automatically sense and correct anomalous bits of data and even cope with signal drop-outs.


The error correcting facility reduces still further the chance of a digital system producing spurious signal voltages — or noise. In practice, digital recording and playback offers a very substantial improvement in signal/noise ratio and dynamic range.

The error correction system adopted by the industry for the compact disc is known as Cross Interleave Reed Solomon Code (CIRC) which Sony say can cope with error bursts affecting up to at least 4000 bits, caused by possible disc production faults, or by gross fingermarks or scratches. Technics puts it another way: the chances of a complete signal dropout are about one occurrence for each 5000 years of normal playing!

Another major refinement in the CD system is that the accuracy and uniformity of the replay signal speed is no longer dependant on either the recording or replay turntable drive. Perhaps it's just as well, because the CD system is based on a constant lineal scanning speed and therefore requires a very precisely controlled variable speed turntable drive motor.

Standard practice is to play from the inside (50mm dia) towards the outside (116mm dia) with the disc spinning initially at about 500rpm and gradually slowing to 200rpm as the replay head follows the data track outwards.

The turntable motor, normally a precision, direct-drive type, operates under crystal-locked servo control to

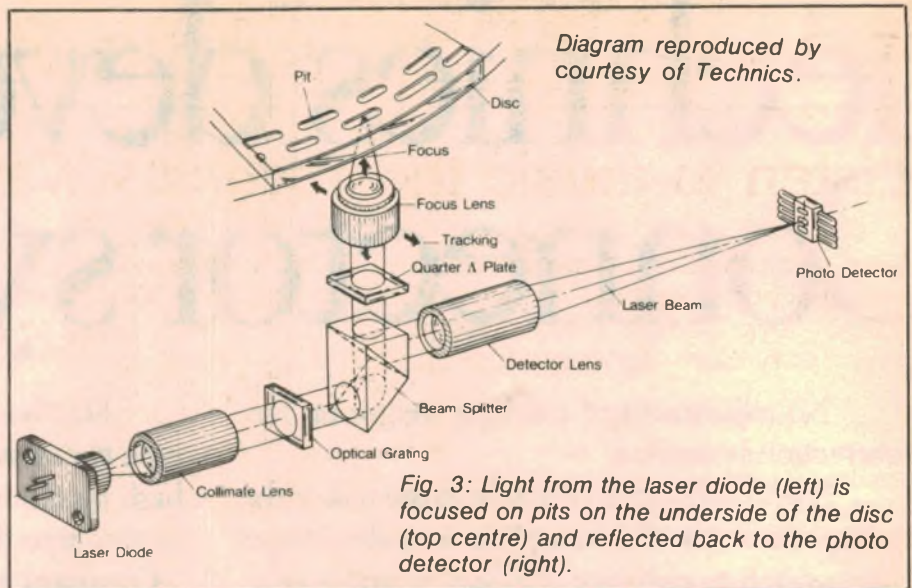

ensure that a stream of samples is read from the disc at the standard CD system rate of 41.1kHz (per channel). However, the samples are not decoded immediately but are loaded into a memory chip, which acts as reservoir.

The samples are subsequently clocked out of the memory bank at precise intervals, determined by the crystal, at 41.1kHz per channel. Since the output is buffered by the memory bank, slight vagaries of the motor and turntable cannot produce wow and flutter which, in the specifications for a CD player, invariably read "immeasurable".

Nor is any problem to be expected from turntable rumble and acoustic feedback. The laser read head is mounted on a servo-controlled traverse mechanism, which automatically follows

the track outward and automatically follows any slight warp in the disc, to keep the laser focused on the underside. Having in mind, also, the small, rigid nature of the disc, it is most unlikely that anything to do with the mechanics or acoustics of the turntable could penetrate the signal system.

And what of channel separation? While the left-hand and right-hand signals share the one data stream on to and off the disc, they are never quantitatively combined in any way. The respective information bits simply alternate in time; and, during decoding, they are switched this way or that to entirely separate D/A converters and thence to the hifi system through entirely separate buffer amplifiers. As a result, channel separation is far greater than the 25-odd dB that one expects

The Technics SL-P10 compact disc player



### Typical specifications:

Sampling frequency	44.1kHz
Disc diameter, thickness	120mm, 1.2mm
Scanning velocity	1.2-1.4m/sec
Playing time	60 mins plus
Frequency range	5Hz-20kHz $\pm$ 0.5dB
Dynamic range	more than 90dB
Signal/noise ratio	more than 90dB
Channel separation (1kHz)	more than 90dB
Harmonic distortion (1kHz)	less than .004%
Wow and flutter	immeasurable

from an LP system.

In a subsequent article, we plan to have a closer look at what goes on inside a CD player but, in the meantime, Fig. 3 illustrates the basis of the system. The information "bits" appear as microscopic pits in the silvered underside of the disc. They are read by the beam from a laser diode and the amount of light reflected into the photodetector varies according to whether the laser beam is falling on the under surface of the disc or a pit. The photodetector interprets the variations in light as digital pulses.



# Audio Review

## Listen to music the Technics Way

Ever since the Sony Walkman was introduced several years ago, personal portables have enjoyed great popularity and have been sold in large numbers. Now Technics have produced the Way which they claim is the smallest portable player of the lot.

Dimensions of the Way are barely larger than the length and width of a standard cassette at 108 x 75 x 30mm. Mass with two penlite cells and a cassette fitted is just under 300 grams. But if the player itself is to be regarded as small the headphones themselves must be looked upon as vestigial. They are of the supra-aural type employing samarium cobalt magnets for high sensitivity. They have an adjustable headband and on the model we reviewed, a tie clip which functions as a play/pause control.

There are three models of the Way which, although differing in appearance, are all electrically identical. At one end of the unit are two buttons for Start and Stop and two 3.5mm stereo phone jacks for connection of two pairs of headphones. Only one pair of phones is supplied at purchase.

The fast forward and rewind buttons on the side of the unit actually depress the tape hub drives slightly to activate these modes. On the side of the unit is a three-way switch to accommodate standard and high coercivity tapes plus metal tape. The volume knob is a small thumb-wheel control.

As might be expected current drain from the batteries is fairly high, leading to relatively short life of only a few hours. During play, the current drain is typically around 110mA and between 130 to 160mA for fast forward and reverse, rising to 300mA at end of tape in these two latter modes. In the play mode there is an automatic stop at end of tape which saves the batteries; ie if you have nodded off.

Technics have recognised the problem of short battery life of the internal penlite cells and have provided an accessory battery adaptor which holds two D-size cells which should have much longer life. The adaptor can be clipped to the user's belt when on the move.

Sound quality of the Way portable player is surprisingly good which is probably a testimony to the calibre of the headphones more than to the player's circuitry. Technics point to their "anti-rolling mechanism" which is claimed to


counter motion-induced wow and flutter but wow is audible and would seem to depend to a large extent on the particular cassette being played. In any case, rapid motion, as during jogging does make wow and flutter more noticeable.

What the Way (and all other personal portables) does need is some sort of noise reduction circuitry. Unfortunately, the 3V supply rail employed presently

able to put it back together?

Apparently Technics were able to achieve this new level of miniaturisation by employing a flexible printed circuit board and a very compact motor using new technology. The flexible PC board fits over the tape transport motor and thus utilises space very efficiently.

The motor is said to be "high torque rare earth magnet coreless DC motor". The armature winding is flat and has no iron core (hence, coreless) and, as can be imagined, this leads to a very thin motor. As far as we can determine, the motor has a conventional commutator but the armature is fixed and the magnet

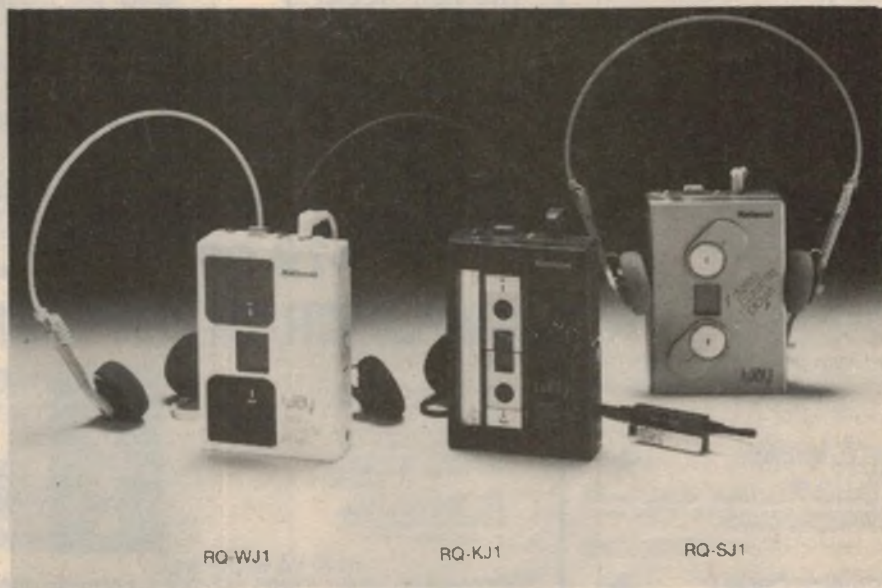

Pictured above are the three models of the Technics Way. We reviewed the RQ-SJ1.

prevents the use of Dolby-B but National Semiconductor Corporation's DNR system is now a possibility. For the time being though, the Way does produce some hiss which is more or less noticeable, depending on the program material being listened to.

Opening the lid of the Way reveals a cassette compartment with the head and pinch roller attached to the lid. The electronics and motor plus batteries are all accommodated in a case thickness which is less than 15mm. What a marvel of miniaturisation! We would have liked to have looked at the internals of the unit but the necessary disassembly job was daunting — what if we had not been

rotates. This is the reverse of the conventional permanent magnet motor configuration whereby the armature rotates.

At this stage we know nothing of the circuitry of the player but it seems highly likely that all the active circuitry would be accommodated within one or two integrated circuits.

Whether you regard the Way as a neat source of personal sound or as an exercise in the art of miniaturisation, it really is impressive and deserves to be popular.

The three models of the Technics Way personal portable cassette player are available from electrical and hifi retailers throughout Australia.

# JAYCAR 10% OFF

ITEMS MARKED BELOW WITH

## "LED Head"

Ref: EA Jan 1983  
Be the first in your block with an electronic sweatband. John McEnroe eat your heart out!  
All components for project NORMALLY \$9.95  
FEB ONLY - 10% ONLY \$8.95  
(sweatband extra)

## "Super Siren"

Ref: EA Nov 1982  
Earsplitting sound from a CMOS circuit that only draws 5mA on average!  
Complete set of electronics NORMALLY \$5.00  
FEB ONLY - 10% \$4.50  
KSN1038 or KSN1005 Piezo horn to suit \$16

## "Vox Relay"

Ref: EA April 1982  
Universal circuit for any application where a voice or noise must be used to switch current on and off!  
All electronics & PCB NORMALLY \$14.50  
LESS 10% FOR FEB ONLY \$13.05

## "Photon Torpedo"

Ref: EA Sept 1981  
Sophisticated game in which you must shoot down the alien with your LED torpedo. All components go onto PCB except sound effects speaker. Box & special front panel included.  
NORMALLY \$29.50  
LESS 10% FOR FEB \$26.55

## "Fuzz Box"

Ref: EA Jan 1981  
Great effects for your guitar! Our kit includes a heavy gauge die cast box and heavy duty foot switch.  
NORMALLY \$19.50  
FEBRUARY PRICE \$17.55

## "Guitar Booster"

Ref: EA June 1982  
Use your electric guitar at home and save the expense of a practice amp. Features treble boost & volume. Includes case and front panel.  
NORMALLY \$14.50  
FEBRUARY ONLY \$13.05

## "Boggle-Goggles"

Ref: EA Dec 1982  
Wire your sunglasses with flashing lights! Great for disco's or parties.  
NORMALLY \$9.50  
FEBRUARY ONLY \$8.55

## "Le Gong"

Ref: EA March 1981  
Built around the SAB0600 IC. This doorbell is on its own! It produces a rich sounding polyphonic (i.e. chords) tune when the doorbell is pressed. A great present when built.  
NORMALLY \$13.95  
FEB ONLY \$12.55

## "P.C. Birdies"

Ref: EA Feb 1982  
Unbelievable! Two realistic sounding canaries chirping away! They will chirp as long as you "feed" them on a 9V battery!  
NORMALLY \$14.95  
FEB ONLY \$13.45

## "Cudlipp Cricket"

Ref: EA Feb 1982  
Cudlipp, the electronic chirping cricket that talks when you talk. Crazy! USES a VOX switching circuit to detect noise.  
NORMALLY \$12.50  
FEB ONLY \$11.25

## "Metronome"

Ref: EA Jan 1982  
This clever design uses the unique 2N6027 (D13T1) PUT. Rate can be varied between 30 & 160 beats/minute. Even at maximum volume the current drain is less than one milliamp!  
Complete with case NORMALLY \$16.95  
FEB ONLY \$15.25

## "Fluoro Starter"

Ref: EA Oct 1982  
One of our most popular kits. Enables you to replace the electromechanical starter with an electronic one! The Fluoro starts up instantly, without a flicker!  
All electronic components supplied, including high quality mains cable (Fluoro starter case required).  
NORMALLY \$5.00  
FEB ONLY \$4.50

↑  
SIMPLE EA KITS

## Lyrebird Piano Kit NEW LOW PRICE...

6 OCTAVE  
\$475

NEW LOW PRICE!! Because we are shipping keyboards and other expensive components in bulk due to high demand, we can pass savings on to YOU.

You can now have a magnificent "Lyrebird" 6 octave touch sensitive piano now for only \$475!! That's a staggering \$50 off the old price. REMEMBER!! THE LYREBIRD OUTPERFORMS READY BUILT PIANOS COSTING UP TO THOUSANDS OF DOLLARS MORE. WHY PAY MORE WHEN YOUR CONSTRUCTION KNOWLEDGE CAN SAVE YOU A FORTUNE?



6 OCTAVE  
VERSION  
REF: EA 11/81-1/82  
\$589

GREAT NEW FEATURES!!  
- FREE! A stand like the one illustrated but not exactly the same! Worth around \$50 but yours at no extra charge with each 73 or 88 note kit.  
- FREE! A soldering iron (worth around \$19). Yours to keep to give years of faithful service after you have completed your Lyrebird (88 note only).  
- FREE! A 200g roll of solder. You will need some to build the Lyrebird but there will be plenty left over for other projects (73 & 88 note versions).  
- FREE! Quality IC sockets provided in high kits.

## SUBWOOFER SYSTEM 10% OFF SYSTEM PRICE FEB ONLY

### THE SUB-WOOFER



MODEL  
SW 250


\$79.50

### AMPLIFIER/FILTER UNIT

AMPLIFIER/FILTER UNIT  
Amplifier Module \$39.50  
Transformer to suit \$39.50  
Metal case specially made to suit including front panel, hardware etc (not a twin 25 case) Only \$29.50  
Buy the lot for only \$148.00  
\$125.00 if you purchase the enclosure and woofer at the same time

This unit has been extremely popular with audio enthusiasts right across Australia! EA have designed a special crossover/booster amp just for this unit. Now you have no excuse to build a subwoofer system to enjoy those thrilling low notes from pipe organs, synthesisers, 1812 cannons etc!!

SPECS:  
Diameter 10" (250mm) Cast Frame. QT=0.39. VAS=631  
Power Handling = 100WRMS.  
Free-air Resonance 32Hz ±1Hz  
Voice Coil = 2" (51mm). Dia. Magnet Assy = 3kg (6.6lbs).  
A FREE SUB-WOOFER CABINET DESIGN IS PROVIDED WITH EACH UNIT!!



REF: EA JULY 1982  
State-of-the-art power Mosfet technology combined with an active low pass filter results in a sub-woofer amp without equal anywhere!!

FEATURES: Around 100WRMS Drive capability.  
Low pass (sub-woofer) filters on board.  
Can hook-up to pre-amp out or power-amp out.  
Power supply on board.  
(Transformer needed. ONLY \$39.50)

ONLY  
\$79

This compact 63 litre vented enclosure was specifically designed around the parameters of the SW250 Sub-Woofer. It follows the theory pioneered by the work of Thiele, Small and Snyder. The Jaycar enclosure is easy to build and is made of high quality durable materials. The heavy walled cabinet is covered with an attractive black vinyl veneer. All timber is pre-cut and the black grille is already made. Assembly takes less than one hour.

NB. The photo shows the prototype which was finished in white. The production units are only available in black. Freight anywhere in Australia only \$10.00.

### THE ENCLOSURE

ONLY  
\$79.50

## Syntom



Original design from the UK magazine "Electronics and Music Maker" April 1981. Self-contained unit produces a variety of fixed and falling pitch effects. Trigger by tapping the unit itself or by striking a drum to which the unit is attached. The Jaycar "SYNTOM" comes complete with high quality predrilled moulded all ABS box 152 x 80 x 47mm with professional silk-screened front panel.  
FEATURES: Decay from less than 0.1 second to several seconds, pitch control, sweep control and volume on/off.

ONLY \$36.50 - 10%

## 500MHz Digital Frequency Period Meter

REF: EA Dec '81 - Feb '82



ONLY  
\$119

Other people may appear to be selling this kit for less. But you GET less!!!


Exclusive Jaycar features:  
\* Heavy gauge front panel. Pre-punched and silkscreened. (NOT Scotchcal).  
\* Low aging rate 10,000MHz crystal \* Quality IC sockets provided (A MUST) \* All metal film resistors used (1% 50ppm)  
\* Thermalloy heatsink for +5V reg  
Beware of advertised units that do not conform to the original design. They may have inferior performance.

EXCLUSIVE

Gold plated BNC Input Connectors  
500MHz option only \$26 extra  
50MHz version \$119  
Tilting bail to suit ONLY \$4.95

## Function Generator

FREE! TILTING  
BAIL WORTH  
\$4.95 included



Ref: EA April 1982

\$99

"Pigeon Pair" companion to the new 500MHz DFM. Low distortion generator of sine, square and triangular waveforms. From below 20Hz to over 160KHz. Inbuilt 4 digit frequency counter in deluxe Pac Tec case. Only \$85.  
JAYCAR EXCLUSIVE - 1% 50ppm metal film resistors used for stability.

BOTH OF THE ABOVE  
NORMALLY \$244  
FEB ONLY \$220!!

# KITS SALE ★★★★★

A (★) ARE 10% OFF FOR THE MONTH OF FEBRUARY ONLY. HURRY!

## Digital Thermometer



**\$69**  
EA282

Read the temperature in your room (or outside) from 0 degrees C to 100 degrees C in fact to within 0.1 degree C. Fantastic resolution on a bright easy-to-read display. Includes case.

## DIGITAL CAPACITANCE METER

Ref: EA 3/82

This kit once again uses the amazing DPM 200 LCD /driver module. Capable of measuring capacitance from 1pF to 19.99uF. It is a must in every workshop or lab.



**\$69**

## HEART RATE MONITOR

Ref: EA 7/82



WAS \$79  
SAVE \$10

This unit enables you to measure your own pulse instantly and accurately. It is light enough even for joggers to carry. A must for people who may have heart problems. Complete kit including LCD Display.

NOW **\$69**

## DIGITAL pH METER KIT

10% OFF FEB ONLY  
NORMALLY \$69.00  
NOW \$62.10 ★



Two models (i) Short form which contains ALL PCB components as specified by ETI (BEWARE!!). The genuine ETI PCB with plated-thru holes, solder mask and component overlay is supplied. We also supply at NO EXTRA CHARGE a full set of quality I.C. sockets. A must with plated-thru PCB's. Remember this when making comparisons.

(ii) Full kit. Includes: all of above plus 12V plugpack, case, front panel, switch and LED bezel and Cannon DB-25 RS-232 connector. Makes a complete stand alonemodem.

\* Capable of a range of Answer/Originate operating modes \* Selectable Baud rate \* Software controlled \* Uses new patented technique \* More reliable and faster than most acoustic modems.

## EA CAR COMPUTER HIT

**\$143.10**

Ref: August EA 1982



We've said enough about this kit. No details here — read our previous ads!

At present (time of ad going to press) our price is the lowest for the complete kit, at \$159.00 (including both sensors).

February ONLY \$143.10

(sorry only tailshaft sensor at this price!) (+ fuel sensor of course) If you require the Speedo Cable sensor we have them at \$29.50 ea.

## TRANSISTOR ASSISTED IGNITION

Ref: EA January 1983. Latest version of this fantastically popular kit!! The Jaycar kit comes with a genuine DIE CAST box — as used in the EA prototype. Beware of others that use flimsy sheet metal boxes!! Ask us about the OPTO option.



ONLY **\$35**

## O-30V 1amp power supply


Ref: ETI December 1982



**\$49.50** complete

## 'Power UP'

Ref: EA 11/82



NO ROOM FOR DETAILS

**\$39.50** -10%

## EA Dual Tracking Power Supply

Ref: EA March 1982

One of our most popular kits!! Can provide dual voltages (-) from 1.3V to 22V at up to 2 AMPS. In addition the supply features a fixed +5V @ 0.9A. The output is protected against short circuits, over loads and thermal runaway.  
ONLY \$89 COMPLETE

## ETI 330 Car Alarm

Ref: ETI July 1981

This unique design detects the voltage drop that occurs across the strap that connects the engine block to the chassis. It does not use wiring inside the car where false triggering can take place. Kit comes complete with all components and metal work (die cast box).  
NORMALLY \$29.50 FEB ONLY \$26.50

## ETI 492 Sound Bender

Ref: ETI Feb 1982

Short form kit of a device to give either your voice, musical instrument or other source that Dalek, metallic sound — as well as other sounds!  
NORMALLY \$24.50  
FEB ONLY \$22.05

## ETI 445 General Purpose Preamp

Universal Stereo pre-amp. Flexible configuration allows you to use it as RIAA (Disc), NAB (Tape) or as a 'flat' pre-amp with fixed gain! One day you will need one of these!

NORMALLY \$7.99  
NOW IN FEB \$7.19 WOW!

## ETI 446 Audio Limiter

Great little circuit that volume compresses when audio level reaches a pre-determined set level for P.A.

NORMALLY \$12.00  
FEB ONLY \$10.80

## ETI 760 RF Modulator

Ref: ETI Sept 1981

High quality, stable RF modulator. Less tendency to drift than cheap Hong Kong 'Tin Box' types. Will accept composite video signal and will supply modulated (video) RF on VHF channel 1 (tunable).  
NORMALLY \$12.99  
FEB ONLY \$11.69

## ETI 499 150W Mosfet PA Module

Ref: ETI March 1982

150 RMS watts of pristine Mosfet power. At last a really stable high-power P.A. "Brick" at a realistic price!

NORMALLY \$79.50  
FEB ONLY \$71.55 HURRY!

## ETI 498 Preamp for above

What can we say? It's on special too!

NORMALLY \$39.50  
NOW (FOR FEB) \$35.55

## ETI 479 Bridging Adaptor

Ref: ETI March 1982

This clever little circuit will convert your 5000 Stereo 100W Power Amp. say a "Black Monolith" to a 300W RMS Mono P.A. Is nothing sacred?  
NORMALLY \$9.95  
FEB ONLY \$8.95

## SIMPLE ETI KITS

### Train Controller

ETI December 1982

Sorry no room for pics! ETI1508 Model Train Controller. Sorry also. Our kit does not include the metal work but we have reduced the price to \$59 per controller.

### Polyphonic Organ

Ref: ETI Jan 1983

Here at last! This very popular kit is now in stock. \* "Touch Sensitive" P.C.B. keyboard \* Fully Polyphonic \* Two voices \* 25 notes 2 octaves \* Can operate from battery or plugpack. (Case not included).

ONLY \$49.50

## Jaycar NUMBER 1 FOR KITS

125 YORK STREET SYDNEY 2000  
PHONE 264 6688 TELEX 72293  
"NEVILLE'S CORNER"  
Cnr CARLINGFORD & PENNANT HILLS ROAD,  
CARLINGFORD  
PHONE 872 4422 or 872 4444

MAIL ORDERS TO: BOX K 39 HAYMARKET SYDNEY 2000

POST AND PACKING CHARGES  
\$2.50 - \$5.00 (ST. \$10.00) \$10.00 - \$20.00 (ST. \$15.00)  
\$25.00 - \$49.99 (ST. \$20.00) \$50.00 - \$99.99 (ST. \$25.00)  
\$100.00 - \$150.00 (ST. \$30.00)

NEW SHOP HOURS  
10:00 - 5:30pm  
11:00 - 5:30pm  
12:00 - 5:30pm  
13:00 - 5:30pm

Mail Order By BANKCARD  
Via Your Phone





# Transistor-assisted Ignition System

We present a revised version of our transistor assisted ignition system originally featured three years ago. Read how it compares with the new "high energy" ignition systems installed on the latest model cars.

by LEO SIMPSON

It is just over three years since we published our Transistor-Assisted Ignition system in December 1979. Since that time it would appear that several thousand of these units have been installed and, by and large, they have performed well. In line with the modest claims made for the system at the time of publication, the major improvement has been increased service intervals for the breaker points and slight gains in fuel economy (up to about 5%). Users of four-cylinder cars have also reported improved engine smoothness.

In the intervening three years since the circuit was published, a considerable number of cars have been made available with breakerless ignition systems fitted as "original equipment", although surprisingly this is by no means universal. A significant number of these breakerless systems are referred to by the car manufacturers as "high energy" systems. How do these compare with our circuit and can our circuit be improved to take note of these recent developments?

Before answering these questions, let us start from the beginning. Many of our readers will not have seen the original circuit published in December 1979 although many may have built the unit from a kit. So for the sake of completeness we will give a full description of the features and the circuit details.

Our new transistor-assisted ignition system offers significant advantages over the conventional Kettering system. For a start, as with other electronic systems, it relieves the points of the heavy burden of coil current switching while still passing enough current through them to keep them clean.

This means that once the system is initially set up it will not be necessary to readjust the system until wear of the rubbing block becomes significant. In practice, this means that every 15,000 kilometres or so, the points should be regapped and the timing readjusted. So, in essence, the car will stay in peak tune for much longer periods than would otherwise be the case and long term economy will be improved.

Starting performance of the transistor assisted ignition system can be expected to be on a par with a freshly tuned Kettering system. However, in the conventional Kettering system starting performance normally deteriorates as the points become worn, so as time goes on, the transistor system is superior.

At low engine speeds, the spark energy of the transistor system will be comparable with a freshly tuned Kettering system with new points fitted. This is because the voltage drop across the main switching transistor is less than 300 millivolts when turned on. This is comparable to the voltage drop across a typical set of points when they are reasonably new. As points become worn, the voltage drop may increase to one volt or more at maximum coil current.

As engine speed rises, the spark energy of the conventional Kettering system is reduced due to the relatively slow build-up of current in the coil primary. Our transistor-assisted system maintains spark energy at a high level even up to very high engine speeds by using "dwell extension".

## Dwell extension

The term "dwell" refers to the time the points are closed and is measured in terms of degrees of distributor camshaft rotation. Our circuit provides for dwell extension by switching on the coil 0.9 milliseconds after the points open. This means that we have artificially determined the spark duration at 0.9 milliseconds.

The photographs of the oscilloscope waveforms show the performance of the system. The first photograph shows the coil waveform without dwell extension.

At the instant of points opening the coil voltage rises very quickly until the spark

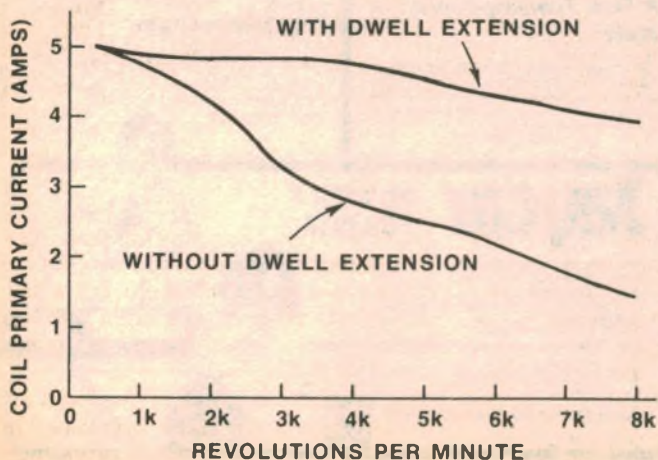


Fig. 1 (left) shows how the dwell extension feature maintains coil current and, therefore spark energy up to very high engine speeds (in this case, for a 6-cylinder motor).

discharge occurs, at which the voltage falls to a relatively low level while the coil secondary resonates with its distributed capacitance at about 10 to 15kHz. When the spark is extinguished, the remaining coil energy is dissipated by resonance in the primary circuit at a much lower frequency.

In a normal ignition system then, the spark lasts for less than one millisecond. Our circuit takes advantage of this fact by fixing the spark duration at 0.9 milliseconds. In the second oscilloscope photograph, the effect of dwell extension can be seen. Note that the main coil transistor is turned on before the primary resonance occurs. This has the effect of increasing the amplitude of the main coil primary voltage (the spike).

By the way, these photographs were taken at the very high spark rate of 300 sparks per second. These are unrealistic figures for normal motoring, corresponding to 4500rpm in a V8, 6000rpm in a 6-cylinder and 9000rpm in a 4-cylinder motor.


At lower spark rates the comparison with normal Kettering ignition is not nearly so favourable but the transistor assisted ignition does give a significant increase in available spark energy from idle speed and up. Whereas the normal system begins to taper off the spark energy from idle speed upwards, the transistor system with dwell extension does a much better job of maintaining spark energy up to spark rates far beyond the capability of normal engines. Fig. 1 illustrates this.

This great improvement in spark energy comes about in two ways. Consider the fact that a normal coil and ballast resistor system takes about 15 milliseconds for the current to rise to saturation (and thus provide maximum spark energy). Since in a 6-cylinder motor the points provide an approximate 50% duty cycle, this means that if sparks are required less than 30 milliseconds apart, the coil current will not reach saturation level. And a 30 millisecond period coincides with a spark rate of only 33 sparks/second or only 667rpm for a 6-cylinder motor.


### Coil not fully discharged

The main reason for the improvement is not so much the extra time for the coil current to build up but the fact that the coil transistor is turned on before the spark extinguishes naturally and primary coil resonance occurs. The fact is that when the coil transistor is turned on again the coil energy has not been fully dissipated. In fact, after the spark extinguishes there is considerable energy remaining in the coil which is usually dissipated in useless primary resonance.

Other features of this transistor assisted circuit are comprehensive protection of

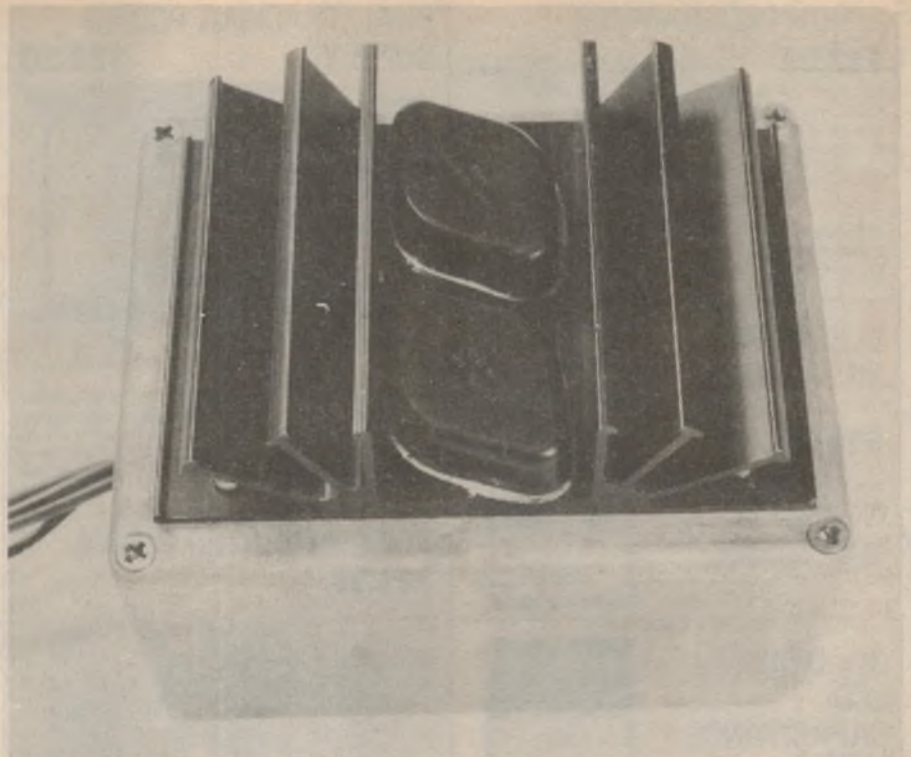

The transistor-assisted ignition is built into a rugged metal diecast case. The large heatsink helps dissipate the heat generated by constant current source Q3.

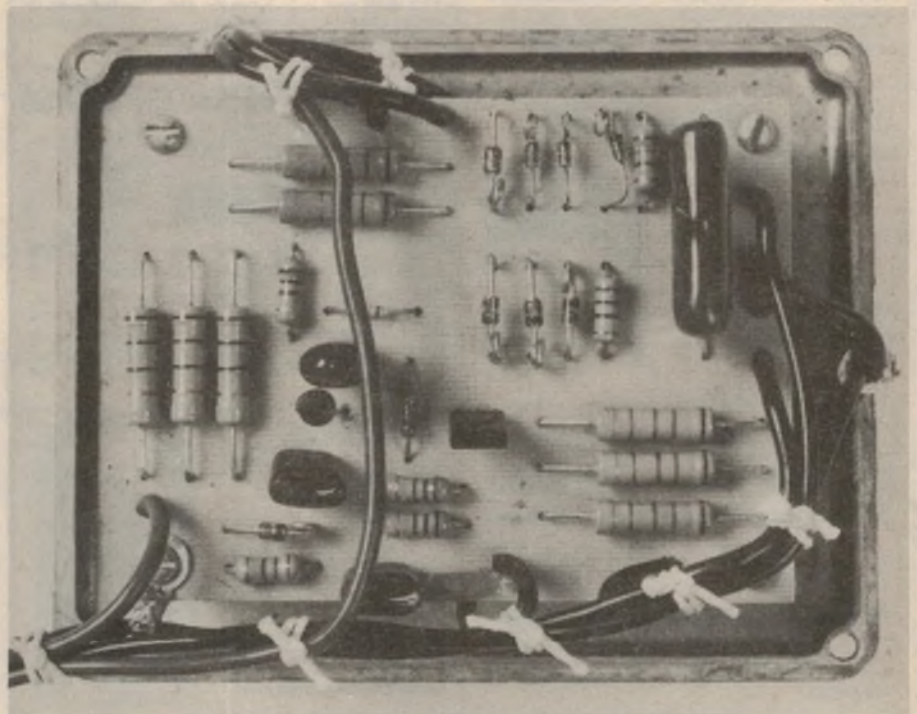

This view shows the assembled PC board. Note that all the diodes are "shock-mounted" by installing them with a loop at one end (see text).

both the ignition system components and the electronic circuitry itself, and the ability to drive a standard tachometer without any modifications. Note, however, that impulse tachometers should be connected across the switching transistor (Q4) instead of across the points.

Is there a catch to all this? Are there no

disadvantages of this new transistor ignition system compared with conventional or CDI systems? Well there are a few side-effects of the new system but you could hardly class them as major drawbacks.

For example, because of the dwell extension feature, the coil is maintained in saturation for a much higher proportion


# ROD IRVING ELECTRONICS

## EPROM PROGRAMMER

**\$43.00**


No need for a Micro with EA's great Eprom Programmer suitable for 2716/2758 Eproms

With Textool Sockets \$55.00  
EA January 82



## DUAL TRACKING POWER SUPPLY

**\$83.50**

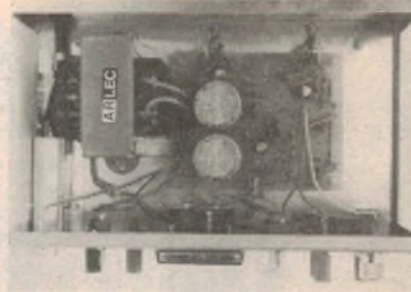


Built around positive and negative 3-Terminal Regulators, this versatile dual tracking Power Supply can provide voltages from  $\pm 1.3V$  to  $\pm 22V$  at currents up to 2A. In addition, the Supply features a fixed +5V 0.9A output and is completely protected against short circuits, overloads and thermal runaway. EA March 82

## SOUND TRIGGERED FLASH

**\$26.50**


This easy to build sound or light operated flash trigger has many features. Catch those spectacular and humorous moments like that time your mother-in-law slipped on the moss covered patio and broke her neck. ETI 568 October 80



## ELECTRONIC METRONOME

**\$16.90**

Great new Metronome Circuit with low current drain (less than one milliamp) drives a Loudspeaker and a Led Indicator. EA January 82



## VOICE OPERATED RELAY

**\$14.95**



EA's great new Voice Operated Relay can be used to control a tape recorder, as a VOX circuit for a transmitter, or to control a slide projector. EA April 82

## "LE GONG"

**\$14.95**

The "Le Gong" Doorbell with those unmistakable chimes generated by the LSI. A must for the man who has everything! EA February 81



## 3 1/2 DIGIT LCD CAPACITANCE METER

Handy pocket size Digital Capacitance Meter, runs off a 9V battery and measure 1pF to 19.99uF in just three ranges. EA March 82



**\$69.00**

## LED LEVEL METER

**\$27.00**

Build a Led level Meter with simultaneous peak and average display plus 60dB dynamic range. This kit is ideal for any application requiring a wide dynamic range level display. ETI 458 June 81




## DIGITAL THERMOMETER: 3 1/2 DIGIT LCD

**\$69.00**

Measure temperatures from below freezing point to around boiling point. EA February 82



## FUNCTION GENERATOR \$79.50

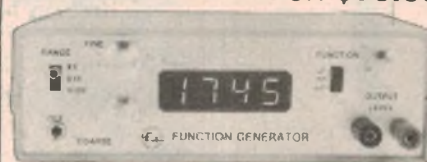


This Function Generator with digital readout produces Sine, Triangle and Square waves over a frequency range from below 20Hz to above 160KHz with low distortion and good envelope stability. It has an inbuilt four-digit frequency counter for ease and accuracy of frequency setting. EA April 82


## LOTTO/POOL'S SELECTOR

**\$22.50**

You have to be in it to win it. Take the chance out of winning the Pools as well as Lotto, and build the great new Pools/Lotto Number Selector. EA July 81



## LARGE SCREEN TV STORAGE CRO ADAPTER \$119.00

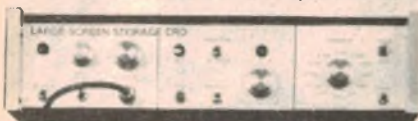

For a low cost Storage CRO with Synchronised Display, Electronic Graticule, One-Shot Triggering and Optional Storage of up to four Screen Displays it can't be beaten. EA February 82

## LOW OHMS METER \$34.50


How many times have you cursed your Multimeter when you had to measure a low-value resistance. Well alas, with the "Low Ohms Meter" you can solve those old problems and in fact measure resistance from 100 Ohms down to 0.005 Ohms. ETI 158 November 81



## ELECTRONIC ORGAN

**\$59.00**

"Electrotune" no its not for your car. It's a 23-note Organ with Special Effects. Singalong with this fun to build Organ and amaze the family and neighbours like never before. EA July 81



## SOUNDBENDER

**\$29.00**

Have great fun creating your own recording effects with music and voice. The Sound Bender can receive from Electric Guitar, Microphones, etc. ETI February 82




## ETI 660 WITH OPTIONS

Kit inc PCB, ICs, Scts \$99.00  
Colour Option \$13.50  
Video Modulator In \$14.50  
Pluggack to Suit 8VAC/1A Set of 4 (2114 Rams) \$11.95  
3K Upgrade \$17.00  
18 Keys plus Scotchcal Labels \$29.00  
ETI October 81





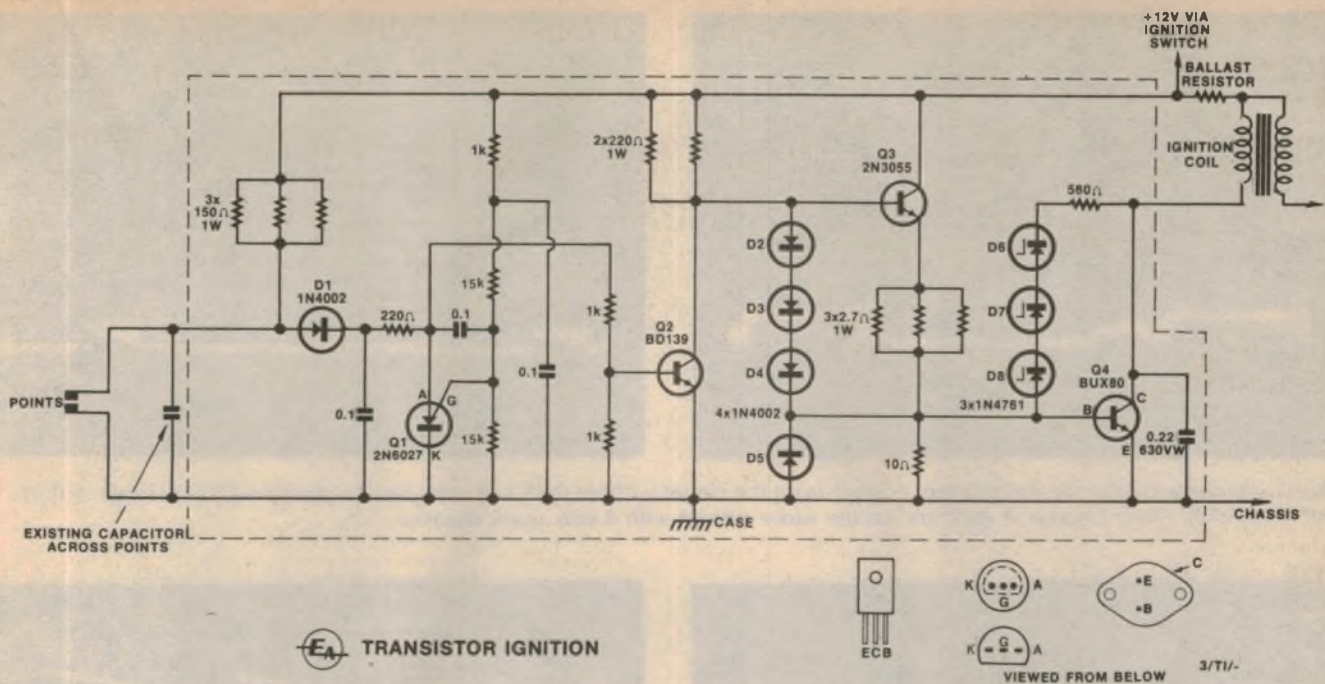

## HOW THE CIRCUIT WORKS

The heart of the circuit is Q4 which is a rugged transistor especially intended for use in converters, switching regulators and automotive ignition systems. Q4 does the arduous job of switching the coil current. It is protected against excessive voltages by a 0.22 $\mu$ F capacitor and by a string of three 75V zener diodes and a 560 $\Omega$  limiting resistor between base and collector. Q4 is switched on and off by Q3 which, together with a diode string D2, D3 and D4 and three paralleled 2.7 $\Omega$  emitter resistors, is set up as a constant current source to deliver 1.3 amps to the base of Q4. This ensures that Q4 turns on hard and has a saturation voltage of around 300 millivolts or less.

Q3 is biased on by two paralleled 220 $\Omega$  resistors and controlled by Q2. Q2 is turned on and off by the distributor points, via D1. Ignore Q1 for the moment, as it does not control the primary switching function but provides the "wetting" current through the points to keep them clean in the fume-laden

atmosphere inside the distributor cap. Now assume, at the beginning, that the points are closed. This means that Q2 is held off and so Q3 and Q4 are on and current is passing through the coil.

When the points open, Q2 is turned on by base current via D1 and the three 150 $\Omega$  resistors. Thus Q2 turns off Q3 and Q4 which interrupts the coil current and develops a high voltage across the coil primary. D1 and the associated 0.1 $\mu$ F capacitor form a points "debounce" circuit to prevent erratic triggering.

In the normal course of events, the points will eventually close again, so that D1 ceases to be forward-biased, turning Q2 off and Q3, Q4 on again to recommence the cycle. But Q1 modifies that cycle by turning Q2 off 0.9 milliseconds after the points open. Q1 is, in fact, a programmable unijunction transistor (or anode gate SCR) which works in the following way.

When the points are closed, the anode of the PUT (programmable unijunction transistor) is held close to zero while its gate is held at a little less than half the supply voltage. When the points open,

the anode will be lifted up to almost the full battery voltage while the gate, by virtue of the 0.1 $\mu$ F capacitor tied between gate and anode, will be forced up to about 1.5 times the battery voltage.

This 0.1 $\mu$ F capacitor then discharges via the voltage divider made up of two 15k $\Omega$  resistors and a 1k $\Omega$  resistor. When the capacitor is discharged to the point where the gate voltage is 0.6 volts less than the anode voltage, the PUT triggers on and removes the forward bias from Q2. Q1 stays in the latched condition until the points close again.

So the PUT enables transistors Q3 and Q4 to turn on much sooner than they otherwise could if controlled directly by the points.

The only remaining components requiring comment are the diode D5 and the parallel 10 $\Omega$  resistor. The resistor effectively ties the base of Q4 to its emitter and thus improves its ability to withstand high voltage. D5 protects the base-emitter junction against reverse biasing.

of its operating time. So the average current passing through the coil is about 80% higher. Or, to put in another way, the coil current is increased from about 2.5 to 4.5 amps.



In addition, the transistor drive circuitry draws about 1.5 amps so the total current drain of the transistor-assisted system is around six amps versus 2.5

amps for the conventional system.



The extra current drain is unlikely to pose much of a problem for the car electrical system but the extra coil current does mean that the coil runs hotter. This has not proved to be a problem for the oil-filled coils on modern cars. Even so, the coil should ideally be placed so that it receives cooling air from the fan.

## High Energy Systems

Well, that about sums up the main features of our transistor assisted ignition system. How does it compare with the so-called "high energy" systems now being installed on many new cars such as the Commodore, Falcon and Rover? The most important feature of these systems is not a "hotter" spark or a higher voltage

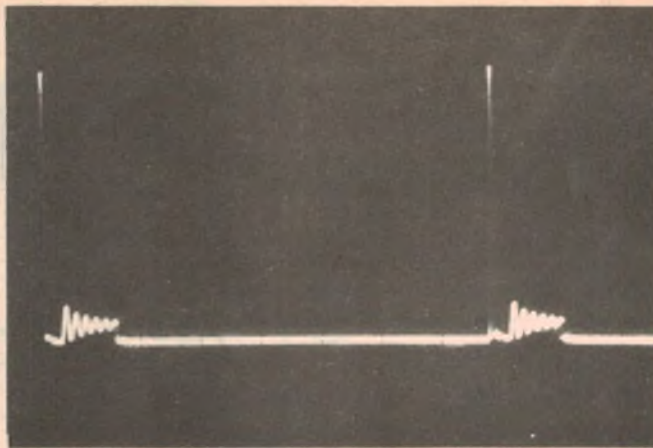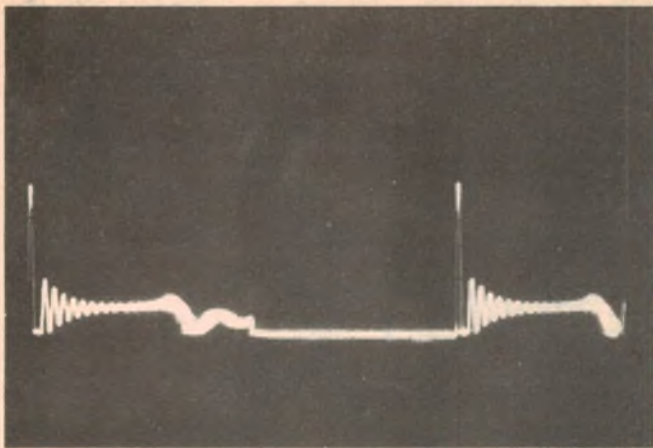

These two photos show the coil primary voltage from the circuit without (left) and with dwell extension (CRO settings: 50V/div and 0.5ms/div). Note: photos at right are for the older system with 0.6ms spark duration.

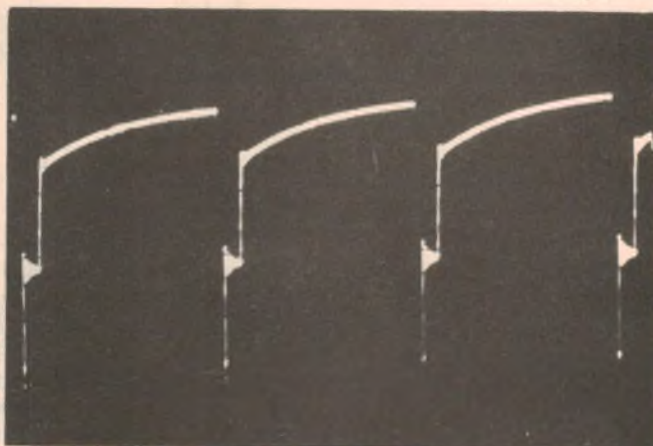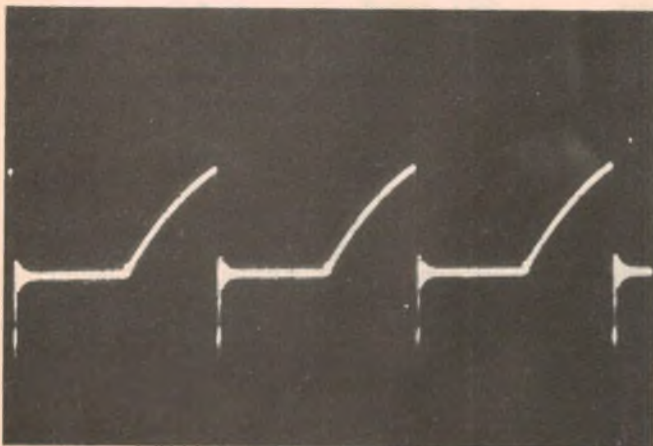

These two photos show the coil current without (left) and with dwell extension (CRO settings: 2A/div and 2ms/div).

output from the coil but, rather, a long spark duration, as much as two milliseconds in the case of the Commodore. This is most important in achieving reliable combustion of the generally lean mixtures used in recent model cars. The "high energy" means that the system also has the ability to re-fire a spark plug if it has been extinguished by turbulence of the mixture.

How do these new electronic systems achieve such a long spark duration? In any ignition system (apart from capacitor discharge types) the spark duration is determined firstly by the amount of energy stored in the coil and secondly by the resistance path presented by the spark plug.

The new high energy systems do not resort to dwell extension (as far as we know) to achieve this greater energy storage in the coil. No, they generally dispense with the ballast resistor in series with the coil and take advantage of the power transistor, which is usually a Darlington, to switch much heavier currents into the coil. Naturally, these systems are breakerless and, with no dwell extension circuitry involved, there is no risk of a coil burnout in the event of the ignition

being left on while the motor is stationary. There is also the advantage of a comparatively simple circuit which should be very reliable, as seems to be the case.

Let us state, from the outset, that unless you are willing to modify the coil or ballast resistor in your system from "standard" it is not possible to gain these really long spark durations from the EA circuit. And in any case, we would strongly advise against doing so. Operating a normally ballasted coil without a ballast resistor will burn it out in a short time, probably within less than half an hour.

Even so, readers who are familiar with the original circuit published in December 1979 will realise that we have increased the spark duration from 0.6 to 0.9 milliseconds. There is no benefit in

even greater extension of the spark time because the system with standard coil does not store enough energy.

The only result of an attempt to extend the spark beyond 0.9 millisecond (by altering circuit components) will be that the spark will extinguish of its own accord at about one millisecond and the remaining energy stored in the coil will be dissipated in useless primary resonance. As outlined above, the major advantage of the dwell extension feature would then be lost.

### Don't open up the plug gaps

Before we leave this topic, there is one final aspect which should be noted. In the past, when fitting electronic ignition, car enthusiasts have often increased the spark plug gaps by as much as 50% to take advantage of the higher spark voltage which is usually available and thereby gain a longer spark "path".

(In our previous article we recommended that distributor points and spark plugs be left at normal settings to allow a quick changeover to normal ignition, should this be necessary in the case of a failure.)

But note that we said above that spark

We estimate that the current cost of parts for this project is approximately

**\$35**

This includes sales tax.

# Here are four good reasons to dbx your sound system

No matter how good your sound system is, you are limited by one major thing: the record. Every normal record is severely limited in musical range. Compression during cutting results in half the dynamic range being eliminated. The excitement of the music is lost. This applies to digitally mastered and direct to disc recordings. The other problem is something you hear every time the stylus enters the groove: surface noise. We went to the source of the problem, the cutting of the record. We encode the record by



compressing it 2:1. The decoder expands back in a mirror fashion. In this way, the vinyl record can achieve a staggering 90dB dynamic range, compared to 50dB achieved on normal high quality recordings. Only through dbx can you truly appreciate digital recordings. The range of dbx discs is growing. There are now over 150 titles available, including a wide variety of Classical, Popular and Jazz discs. Hear "The Empire Strikes Back" by John Williams, Vivaldi's "Four Seasons" and artists such as Oscar Peterson, Dave Brubeck and Almeida.



MODELS 222 AND 224. The benefits of dbx for both disc playing and home recording. Your cassette deck's dynamic range increased from 50dB to a staggering 80dB

The 224 further provides simultaneous encode/decode for three head recorder off tape monitoring. Both models provide decoding for dbx discs



MODEL 228. This new model provides the noise reduction and disc decoding capabilities of the 222/224 with dynamic range expansion for your non encoded discs and tapes. Restore the dynamic range of records, tapes and radio broadcasts.



The most advanced dynamic range expander ever developed is now more affordable. Three band expansion brings new life to your entire record collection.

## Audio Engineers

342, Kent St., Sydney, Phone (02)29 6731.  
Victoria: (03)44 32 95. Queensland (07) 369 9670  
Western Australia 335 8273. S.A. (08) 293 4896

Please send full details of  Full range of dbx discs  The range of dbx equipment

Name \_\_\_\_\_  
Address \_\_\_\_\_

# Transistor-assisted Ignition

duration is determined also by the resistance path presented by the spark plug. If the resistance is increased the actual spark duration will be shorter, for a given coil energy storage. So, opening the plug gaps will give a longer spark "path" but it will also give a shorter spark duration. On balance then, there is no advantage to be gained by increasing the spark plug gaps.

## Circuit changes

Apart from the change to the spark duration, we have made two other changes to the circuit in the light of three years experience with the system. The first is to change the paralleled base bias resistors for Q3 from 120Ω to 220Ω and the second is to change the mounting arrangement for the various diodes.

The reason for the latter changes is that we know of a number of these systems that have failed because one of the three diodes, D2, D3 or D4, which provide the voltage reference for the current source, Q3, has failed and gone "open-circuit". This causes Q3 to conduct very heavily and burn out its three 2.7Ω emitter resistors. This usually chars the printed board so badly that it also has to be replaced.


By changing the base bias resistors for Q3, it is not likely to conduct so heavily. More importantly, by mounting each diode with a "stress relief" loop at one end, it is less likely to fail.

Elsewhere in this article we give details of an optoelectronic distributor head which can be used with our transistor ignition system. We have mixed feelings about this option. On the one hand, the opto system eliminates the distributor points entirely and should give smoother idling. On the other hand, it precludes the possibility of a quick change back to standard ignition in case of a failure.

While the odds of such a failure occurring are probably fairly long, it does bear thinking about. We have devised a system which gives changeover in a few minutes and which could easily be done by even a "non-electronics inclined" mechanic in the event of a failure while your spouse or relative is driving the car. By contrast, a failure in an all electronic system would probably be a "tow away job".

## Construction

The entire transistor ignition circuit is housed in a diecast aluminium box. We used an Eddystone box measuring 93×56×119mm but any diecast box which can comfortably accommodate the PC board and power transistor heatsink will be suitable. A diecast box is preferred to a folded sheet metal box in

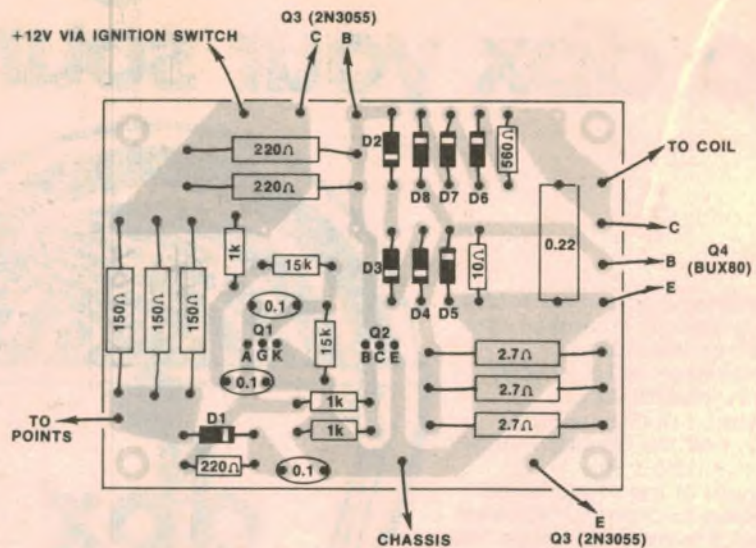

The 150Ω, 220Ω and 2.7Ω resistors are all 1W units; the 0.22μF capacitor across the BUX80 (Q4) should be rated at 630VDC or 250VAC.

## WHAT ABOUT CDI?

Incidentally, we debunked CDI systems in our December 1979 article because of a number of problems, chiefly circuit reliability, tendency to cross-fire and lack of compatibility with automotive tachometers. We no longer recommend any CDI design, including our own version described in July, 1975.

We stand by what we said then: that CDI is not suitable for four-stroke auto engines, particularly those that comply with pollution regulations. Not only will the cross-firing tendency of capacitor

discharge ignition cause rough running but it is highly likely that it will cause damage to piston crowns. Nor is it likely to have any benefit for fuel economy as the very short spark duration is likely to result in less reliable fuel ignition.

It is significant that not one automobile manufacturer has incorporated CDI as standard equipment.

CDI does have a place in two-stroke engines where its ability to fire fouled plugs is an advantage and cross-firing is not a problem.

that it is more rugged and can be made splashproof easily.

All the components with the exception of the two power transistors are mounted on a small PC board measuring 91×68mm and coded 79ti11.

The two power transistors are mounted on the lid of the diecast box together with a single-sided heatsink which is readily available from most kitset suppliers.


If the heatsink does not come pre-drilled you should first drill it using a TO-3 mica washer as a template. After drilling, remove any burrs by using a large diameter drill. Next, position the heatsink on the lid of the diecast box in such a way that it does not interfere with the lid-securing screws and then punch suitable drill centres in the lid and drill and deburr the holes in the previous manner.

With the heatsink free of any metal


shavings or other grit, a thin layer of thermal conducting compound or silicone grease can be applied in the area underneath the transistors and on the mica washer. Some heatsink compounds may contain beryllium, a highly toxic substance, so apply the compound carefully with a cotton bud and avoid skin contact with it. Mount the transistors with the mica insulating washers and plastic bushes in position and then check that the case of both transistors is insulated from the heatsink and lid using a multimeter or other continuity checker.

We used plastic TO-3 transistor covers on both transistors. These are essential both to eliminate the possibility of short circuits and also to isolate the rather high voltages which are present on the case of Q4.

Q4 may either be a BUX80 as originally specified or a Motorola 2N6547. At pre-

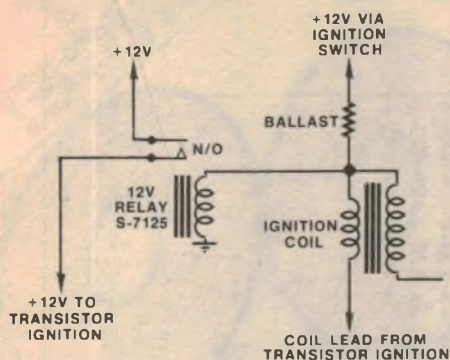

This circuit is suggested as a method of connection in cars with the ballast resistor in the wiring harness.

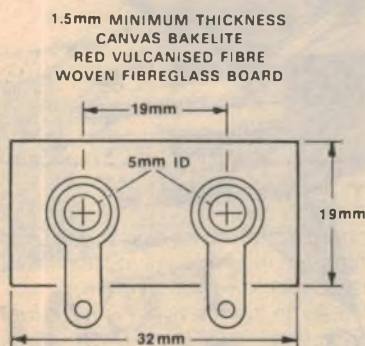

EYELET/SOLDER LUG ASSEMBLY

Use one of these lug assemblies to make the connections to the ignition system.

sent we know of no other transistors which are suitable equivalents so any other transistors which are substituted for Q4 should be regarded as bogus (unless the kitset supplier includes in the kit a note of authorisation from "Electronics Australia").

Now the components can be soldered onto the PC board. The only problems which might be encountered here are with the orientation of the diodes, the PUT and BD140 transistor, so pay special attention to the wiring diagram.

Note that the diodes should all be installed with a loop at one end, as shown in the photograph. The loop may be at

either end although we have made it at the cathode end in each case.

Note that parallel combinations of resistors have been used in three instances. This is done because one watt resistors are cheaper and generally more readily available than equivalent five watt wirewound resistors and their temperature rise is not as great. Even so, one watt resistors can still become quite warm so mount them slightly off the board.

We suggest that you delete two of the three parallel 150Ω 1W resistors if you intend fitting the optional optoelectronic trigger circuit. This will reduce dissipation in the MJE340 trigger transistor, as well as lowering its "saturation" voltage.

Wires to the transistors and to the various external connections are heavy gauge 4mm auto cable. This won't fit easily into a standard PC hole so we suggest that you could either redrill the holes to an appropriate size or use PC stakes. If PC stakes are used make sure they fit tightly into the PC hole so they can't fall out when a wire is soldered on to them.

Mounting holes for the PC board should now be drilled. The PC board is mounted on the lid using brass or plated standoffs, screws, nuts and shake-proof washers. The holes will pass through both the lid and the heatsink, so ensure that the mounting screws don't interfere with the fins on the heatsink first. Before installing the PCB, wire up the leads to the power transistors. Use one-metre lengths of wire to provide the chassis, points, coil and battery connections to the PCB.

When the unit is actually installed these lengths may be increased or decreased and suitable lugs or connectors attached. The chassis cable is also connected to a lug on one of the standoffs so that the circuit is connected to the car chassis via the case as well.

Clamp the cables before they exit the box using a cable clamp; if necessary, build up the cable thickness with insulation tape to give a tight fit. The cable should exit via a grommetted hole on a

## UV LIGHT BOX

- 4 X 20" UV Tubes
  - Electronic Timer
  - Sliding Tray
  - Safety Micro-switch
- \$295.00 (+S.T.)

## DEVELOP/ETCH TANK

- Rigid PVC
  - Heater
  - Standard Hose Fittings
  - 24" Wide 12" High
- \$195.00 (+S.T.) 2  
Compartment \$285.00 (+S.T.) 3 Compartment

# KALEX


101 Burgundy St.  
Heidelberg 3084  
(03) 458 2976  
Telex AA 37678  
MELTON  
(03) 743 1011

ELECTRONIC COMPONENTS &  
ACCESSORIES  
SPECIALIST SCHOOL  
SUPPLIERS

## AN INTRODUCTION TO DIGITAL ELECTRONICS FOURTH EDITION

Electronic equipment now plays an important role in almost every field of human endeavour. And every day, more and more electronic equipment is "going digital". Even professional engineers and technicians find it hard to keep pace. In order to understand new developments, you need a good grounding in basic digital concepts, and An Introduction to Digital Electronics can give you that grounding. Tens of thousands of people — engineers, technicians, students and hobbyists — have used the previous editions of this book to find out what the digital revolutions is all about. The fourth edition has been updated and expanded.

to make it of even greater value



ONLY  
\$4.50  
+ 90c  
p&p

Available from "Electronics Australia", 57 Regent St, Chippendale. PRICE \$4.50 OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2008. PRICE \$5.40.

## An introduction to Digital Electronics

You don't need any previous knowledge of digital electronics — the book starts you right from scratch, and covers all of the basic concepts you need.

Available from "Electronics Australia", 57 Regent St, Sydney. PRICE \$4.50 OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2008. PRICE \$5.40.



**LAST CHANCE!**

**LAST CHANCE!**

**DICK SMITH'S**

# \$50,000 GIVE-AWAY



- ★ DICK SMITH COMPUTER CHESS SETS.
- ★ DICK SMITH POCKET COMS.
- ★ DICK SMITH CASSETTES.

**SCOPE**  
50 SCOPE  
SOLDERING IRONS

**ALMOST  
9000  
PRIZES!**

**JUST  
MATCH UP &  
WIN!**

Yes! You could be an instant winner in our Mighty Match Up competition - with over \$50,000 worth of prizes. Every purchaser\* at a Dick Smith store gets a free ticket - open it up and win an instant prize, or save until you get matching halves. It could be you!

RAFFLES AND BINGO PERMIT BOARD, Permit No.: 82 207 issued on 6/12/82.  
Permit No.: TC 82 1943 issued under the Lotteries and Art Unions Act.


\* SA Customers: No purchase required - simply send a stamped, self-addressed envelope to PO Box 321 North Ryde and we'll send you a ticket.

Competition during January and February 1983 only - so hurry in!



**AT YOUR NEAREST DICK SMITH STORE**  
See full address details on page 98.

# Transistor-assisted Ignition

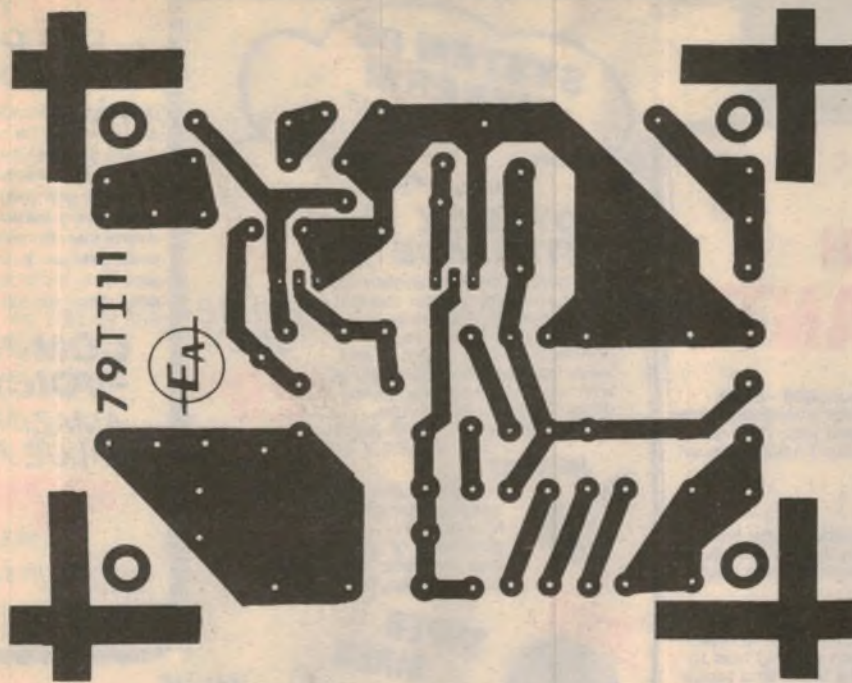

Actual size artwork for the PCB.

side of the box which will actually face downwards when installed. This will help keep water out of the unit.

The only remaining task is to install the completed unit into the car. For reliable performance of the unit choose a well-ventilated spot – ideally well away from possible splashing by mud or water. Near the front grille or on the wheel housing would be suitable positions.

Install the case by the use of a suitable bracket or drill several holes in the bottom of the case and secure it to the vehicle by means of 12mm×No. 10 self-tapping screws. With the unit mounted, the various connections to the car electrical system can be made.

For this purpose, we recommend the use of an eyelet/solder lug assembly. This sits on what is normally the points connection of the coil but which now is connected to the collector of Q4. The remaining connection point of the solder lug assembly connects the points wire from the distributor back to the "To points" lead in the transistor ignition.

The other connection to the coil remains as standard because it is the same whether transistor or conventional ignition is being used. In this way it is simply a matter of swapping leads to the eyelet assembly on one side of the coil, if a changeover is necessary. We do not recommend any other system of

changeover which may involve switches or plugs.

Most kitset suppliers already supply this eyelet as standard.

Apart from the connections to the ignition coil and points it is also necessary to connect the +12 volt lead to the battery via the ignition switch. Some circuit designs actually obtain power via the ballast resistor, which means that the circuit would probably be easier to install but it also has the disadvantage of reducing coil current and so reducing spark energy.

If your car has a separate ballast resistor then it is a simple matter to connect to the ignition switch side of the resistor. Some cars, though, use a ballast wire, which complicates the situation because it is then necessary to guide the +12 volt lead from the transistor ignition through an appropriate hole in the firewall to the actual ignition switch itself. Alternatively, if you do not wish to drill through the firewall then you can use the circuit shown elsewhere in this article. It consists simply of a relay connected to the coil side of the ballast resistor which switches the +12 volt from the battery directly. The relay can be installed inside the box.

With installation complete, the system can be tested. The points gap should be set exactly as specified by the car

## Parts List

- 1 PC board, code 79ti11, 91mm×68mm
- 1 diecast aluminium box, 118×93×56mm, Eddystone 6908P or similar.
- 1 dual TO-3 heatsink (see text)
- 3 metres red 4mm auto cable
- 1 metre black 4mm auto cable
- 4 25mm brass standoffs
- 2 sets of TO-3 mounting hardware, ie, mica washers, insulating bushes, screws and nuts.
- 2 TO-3 transistor insulating caps
- 1 eyelet/lug assembly

### SEMICONDUCTORS

- 1 BUX80, 2N6547 transistor
- 1 2N3055 transistor
- 1 BD139 transistor
- 1 2N6027 PUT
- 5 1N4002 diodes
- 3 1N4761 75V zener diodes

### CAPACITORS

- 1 0.22µF 630VWV or 250VAC
- 3 0.1µF metallised polyester (greencap)

### RESISTORS (¼W or ½W unless specified)

- 2×15kΩ, 3×1kΩ, 1×560Ω, 1×220Ω, 2×220Ω/1W, 3×150Ω/1W, 1×10Ω, 3×2.7Ω/1W.

### ADDITIONAL PARTS FOR OPTO-ELECTRONIC TRIGGER OPTION

- 1 printed circuit board set, code 81ti6, 74×58mm
- 1 5401 quad two-input NAND gate (do not substitute)
- 2 MJE340 NPN transistors
- 1 TIL81 phototransistor
- 1 TIL31 infrared LED
- 1 5.6V 400mW zener diode
- 4 1kΩ resistors (¼ or ½ watt)
- 1 680Ω resistor (¼ or ½ watt)
- 1 470Ω resistor (¼ or ½ watt)
- 1 39Ω resistor (½ watt)
- 2 brass pillars
- Machine screws and nuts, cable clip, two-core cable etc.

**NOTE:** Resistor wattage ratings and capacitor voltage ratings are those used for our prototype. Components with higher ratings may generally be used provided they are physically compatible.

manufacturer. Note that if a "dwell meter" is used to set the points gap, then it is probably best to do this adjustment when the vehicle is running with conventional ignition.

**Turn to page 56 for optoelectronic trigger system**

# The DICK SMITH KIT WARRANTY

**EASY TO BUILD**

Everything you need is supplied - parts, solder, even nuts and bolts and step-by-step instruction manuals in most kits. They go together so easily - you don't have to be an expert.

**YOU SAVE**

Because you supply the labour, you save, and because we buy directly and in bulk, we can pass even greater savings on to you!

**EXCLUSIVE 'SORRY DICK' IT DOESN'T WORK GUARANTEE**

On our major kits, we even include a repair service: if for some reason your kit fails to work, we will diagnose the faults and repair them for a lower than normal fixed service fee.


This includes any parts you may have damaged during assembly. So you cannot fail with a Dick Smith Kits!

**DICK SMITH MONEY BACK OFFER**

We're confident you'll be delighted with our kits. But if you're not (for absolutely any reason at all) - you can return any kit to us in original condition and packaging (ie. before construction has commenced) and we'll refund your purchase price in full. What could be fairer than that?

**YOU REAP THE BENEFIT!**

**YOU'D BE CRAZY TO BUY A KIT WITHOUT THESE GUARANTEES!**

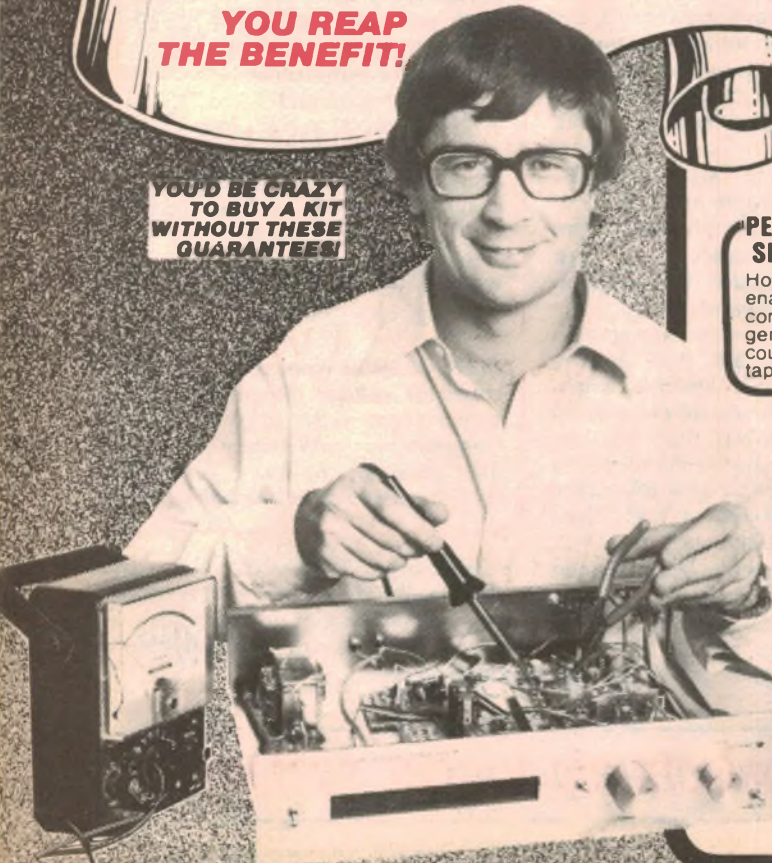

**SYSTEM 80 OWNERS!**  
LOOK AT THIS VALUE!

## JOYSTICK INTERFACE

Play games on your System 80 faster and with greater realism. Use a joystick! This easy to build adaptor allows easy connection. Just plug it in and away you go. Note: compatible with most US games software designed to work with the 'alpha' joystick. Cat K-3455 SEE ETI JULY '82

**SAVE VALUE ONLY \$29<sup>50</sup>**

## JOYSTICK



To go with the above adapter. Sensors for four primary directions of motion and separate 'fire' button. Cat X-2020

**ONLY \$19<sup>90</sup>**

**NEW**

## SUPER SIREN



Who'd believe - so compact but such an ear-piercing sound! Draws little current, uses a piezo-electric tweeter. Many uses - malfunction, intruder, car, alarm etc. Cat K-3505

**VALUE AT \$19<sup>95</sup>** SEE EA 11/82

## PERCUSSION SYNTHESIZER

Now you've got rhythm - with this percussion synthesizer. Produces the pound of drums, cymbals, snares and bongos. You can play manually or by total electronic control. Add a sequencer, and you can have automatic rhythm just right for learning the basics of timing. ETI 3/82 Cat K-3517



**\$47<sup>50</sup>**

## PERCUSSION SEQUENCER

How's this for a great kit! Single PCB kit enables percussion synthesizer (above) to be controlled externally by this rhythm generator, and it does it automatically! You could start your own band! Also useful for taping and dubbing. Cat K-3518 SEE ETI JUNE '82

**\$12<sup>50</sup>**

## CAPACITOR DISCHARGE IGNITION KIT

Cat K-3280 This has got to be the best value CDI available. Your car will be easier to start - when hot or cold, your plugs will last longer, keeping your car in tune and using less petrol. This CDI will pay for itself in no time at all! SEE EA JULY '79.

**TOP VALUE \$29<sup>50</sup>**

**NEW IMPROVED VERSION**



## TRANSISTOR ASSISTED IGNITION

This kit incorporates circuitry with dwell extension which results in a hotter spark at high engine speeds and is compatible with modern electronic tachometers. Comes complete with a sealable waterproof diecast box SEE EA NOV '79. Cat K-3301

**NEW** give your computer a voice!

Unbelievable just a couple of years ago, but here it is! You can connect phoneme-type speech synthesiser on your computer - unlimited vocabulary, variable pitch control, easy to program AND it operates with any computer fitted with a centronics type parallel printer port ie System 80, Super 80 & TRS 80. Hundreds of dollars cheaper than built-up units. SEE EA OCT '82

**COMPU-VOICE AMAZING VALUE AT**

**\$97<sup>50</sup>**

Cat K-3530

CASE TO SUIT \$13.50  
Cat H-2505  
TRANSFORMER TO SUIT \$3.90 Cat M-2851

**MASSIVE MUSIC POWER**



## 300 WATTS RMS AMPLIFIER KIT

A fantastic amplifier kit that gives you a tremendous scope for boosting the output of your existing sound system - uses one module to produce 300 WATTS RMS into 4 ohms or 2 units to give a truly massive 600 WATTS RMS continuous power. Ideal for public address, rock groups etc. or to blast your neighbours to the other side of the street. Cat K-3444

**\$72<sup>00</sup>**

SEE ETI 2/80

**NEW METALWORK**

**\$39<sup>50</sup>**



**OUR MOST POPULAR  
KIT EVER!**



**Complete  
with professionally  
designed front panel**

**Great value  
for only**

# The Incredible PLAYMASTER Mosfet Amp

This 'Top of the Line' amplifier features up to the minute circuitry as well as the new MOSFET output stage. With a huge 50W/channel output, it's got everything you'll ever need in an amplifier. All components fit a single PCB which makes construction very easy. All parts are supplied - right down to the last nut and bolt! Here's what you get for the price: LED indicated input; Loudness control; Muting control; Stereo/Mono switching; Tape monitor switch; 55W power output; Frequency Response: 30Hz to 20kHz; Hum and noise: -73dB unweighted; Unconditional stability; and includes a comprehensive step-by-step instruction manual! What a bargain!

Cat K-3515  
See EA Jan '81

**\$175** WHY PAY MORE?

## Digital Clock/ Thermometer



A project that gives you all the features of a digital alarm clock as well as a digital thermometer! The thermometer will display in either Fahrenheit or Celsius and the clock will even turn your radio on for you. Extremely large display has exclusive auto-dimming circuit to take the strain off your eyes. Fitted with alarm (speaker included) and snooze button, the clock is mains powered with battery back-up. No case is included with this kit.

Cat K-3436  
See EA Sept. 81

**\$39<sup>50</sup>** ~~\$49.50~~

**NOW IN STOCK!**

## ELECTROCHUNE

The Electrochune is a keyless monophonic organ and uses the circuitry of a synthesizer to give variable attack/decay times, tremolo and square/ sine wave output mixing. It even has a built-in amplifier and speaker with separate volume control. Complete with plugpack and full instructions. Cat K-3506

SEE EA JUNE '81

was \$75.00! **\$45**

## UNIVERSAL INVERTER

100's of uses for this fantastic inverter just by rearranging the coil winding as explained in the instructions supplied. Any voltage available up to 1400V.

Cat K-3276

SEE ETI SEPT 82

**\$49<sup>50</sup>**

**NEW!**



## DRIVEWAY SENTRY

Turns home lights etc. on for predetermined time - activated by headlights. Self contained watertight diecast box - has internal relay that interfaces to control external functions.

Cat K-3305. See EA Dec '82

**ONLY**

**\$29<sup>50</sup>**

**ACTIVATE HOME LIGHTS FROM YOUR CAR!**

## LCD PANEL METER



Versatile and accurate, LCD read-out for low power consumption. Easy integration into panels makes it ideal for amateur and professional use in projects or updating analogue equipment.

Cat K-3450 **\$29<sup>50</sup>**

**NEW!**



## STEREO SYNTHESIZER

**STEREO SOUND FOR YOUR VIDEO!**


If you've compared mono and stereo sound, you'll be aware of the advantages of stereo reproduction. Now you can enjoy the benefits of stereo sound from your video cassette recorder, TV or AM tuner with this Stereo Synthesizer. Easy to build, you can choose between normal and synthesized stereo sound and between two different monophonic sound sources. Cat K-3420

SEE EA SEPT 82

**ONLY**

**\$52<sup>50</sup>**

**YOU  
COULD  
WIN YOURSELF  
A MILLION!**




## Lotto/ Pools Selector

Fancy your chances but can never decide which numbers are the lucky ones? Throw your caution to the winds and let an electronic marvel decide for you! Comes with large LED display and attractive front label. Get lucky with the push of a button. Cat K-3392. See EA June '81.

**\$19<sup>95</sup>**

## 3 DIGIT COUNTER



A deluxe fibreglass PCB with all counter components supplied - and you can use this as a base for a huge number of projects. Operates from 5 to 15V supply. Complete with our own specially prepared instruction manual. Cat K-3451

~~\$29.50~~ **\$22<sup>50</sup>**

**NEW!**



## 150W PA/GUITAR MOSFET AMPLIFIER

Guitar and public address amplifier utilising ETI's 499 Mosfet 150 watt power amplifier module as published in ETI March, 1982. Comes complete with pre-amp PCB and special Hitachi mosfets 2SJ49 and 2SK134. Also includes on board power supply, just add transformer (PF4361/1 Cat M-0153). Cat K-3525

**GREAT VALUE! \$119**

**WHY BUY BUILT UP?**

## HIGHLY VERSATILE

## VARIABLE POWER SUPPLY

A truly functional project, giving a range of voltages from 1.3V to 30V. The supply also has a current capability of 1A complete with variable current limit. Cat K-3475. See ETI Dec 82

**\$59<sup>50</sup>**

## TOP VALUE AMP MODULES

### 100W AMP MODULE

The ultimate in simplicity - even the power transistors mount on the one PCB. The PCB heatsink bracket is supplied with the silk-screen overlay on our fibreglass heavy-duty PCB. The design is based on the ETI 422 power amp without the power transistor wiring hassles. Has on-board fuse protection. Input sensitivity 1V.

Cat K-3442. See ETI Dec. 76

**\$25<sup>00</sup>**

### 50W AMP MODULE

Same design, same simplicity as 100W unit above, but with 50W RMS input sensitivity 500mV. Supplied with special DSE instruction booklet and rugged fibreglass PCB white silk-screened component overlay for easy assembly.

Heat-sink extra

Cat K-3440. See ETI Dec. 76

**\$19<sup>95</sup>**

## UNIVERSAL TIMER/STOPWATCH


All purpose counter that can be used as a stopwatch, countdown timer or event timer. Large, bright 4 digit LED display and switch selectable timing rates between 0.01 and 99 secs. Great for the darkroom!

Cat K-3435. See EA Sept. 81

**\$39<sup>50</sup>**

# DICK SMITH Electronics

SEE PAGE 98 FOR ADDRESS DETAILS



DSE/A414/LA/LM

# Optoelectronic trigger locks in engine tune

If you want to convert your car's ignition to a breakerless system, here's how you do it. This optoelectronic trigger circuit provides an output which simulates the mechanical contact breaker (or points), and can trigger the EA Transistor-Assisted Ignition System without modification. The existing centrifugal and vacuum advance mechanisms are retained, and the only mechanical part which must be constructed with any precision is a chopper disc.

Main advantages of the system are that it locks in engine tune and is maintenance free. The engine remains at peak tune, and there is no need for periodic adjustment of the points gap and timing to compensate for contact heel wear. There is a disadvantage though: once the points are eliminated it is no longer possible to quickly revert to a conventional system in the event of a malfunction.

The light source is an infrared LED (TIL31) with a lens to give a well

defined beam which is received by phototransistor Q3 (TIL81). Light passing between the two is interrupted by a chopper disc which produces a rough square wave.

This waveform is cleaned up using an open collector TTL IC with two gates, IC1a and IC1b, connected as a set-reset bistable. The inputs are driven in complementary mode by using a third gate, IC1c, as an inverter, while the remaining gate (IC1d) is used as a buffer and drives trigger transistor Q2.

Power for the circuit is derived from the vehicle ignition system. A regulated +5V rail is derived using series regulator transistor Q1 and associated zener diode D1.

## Construction

The complete circuit can be built on a glassfibre PCB and mounted inside the distributor. The prototype fits a Delco distributor as fitted to many GM vehicles, but the layout can be modified to fit most other types.


Some foreign vehicles use very small distributors, and for these it is best to house the circuit in a small metal box beside the distributor.

The phototransistor is mounted directly on the PCB and the LED is mounted about 2.5mm away on a small board supported by 3mm tapped pillars which also carry the LED current. The main PCB is mounted with spacers on the action plate in the distributor with 3mm screws which must have holes drilled and tapped. As the action plate is rotated by the vacuum advance mechanism, it must not be obstructed by the board or swarf, and the manufacturer's recommended lubricant should be restored. If the existing contact pivots on a pillar rivetted to the action plate, the pillars must be removed before the PCB can be installed.

Care must be taken to ensure that the small board does not foul the rotor arm or the inside of the distributor cap. When installed, the PCB is connected to the ignition unit by a length of good quality miniature two core stranded cable. The cable should be supported by a small P clip fixed by one of the mounting screws, and by the existing grommet in the distributor body. Remember to leave enough cable loose so that the action plate can revolve.

The circuit can be tested by connecting +12V to the supply lead, and a low power bulb from +12V to the output lead. The lamp should remain on until the light beam is interrupted. If the circuit switches the lamp correctly, connect it to the electronic ignition unit and take the high tension (HT) lead from the coil directly to one spark plug. This will avoid coil breakdown if the rotor arm is not pointing at a segment of the distributor cap. Check that a spark is generated every time the light beam is interrupted.

When the circuit has been tested, a chopper disc should be constructed to suit the distributor. The accuracy of this disc affects the overall performance of the system, and the most important parameter is the angle between the leading edge of the blade and the line joining the mainshaft axis with the centre of the rotor arm sector. It is imperative that

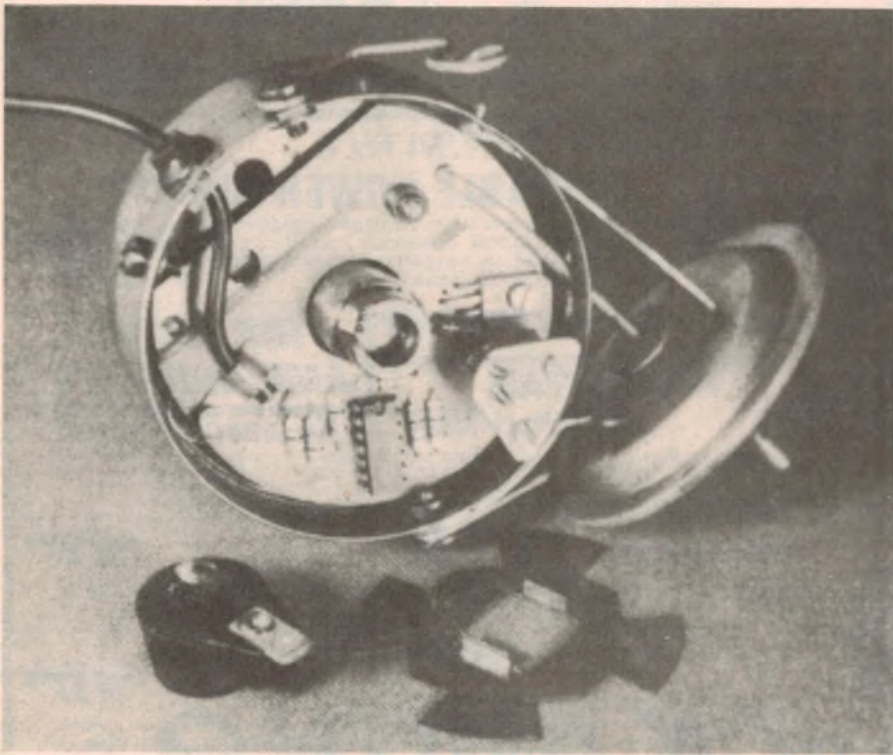

*This view shows the assembled PCB mounted on the action plate of the distributor. In the prototype, Q1 was mounted underneath the board. Make sure that the emitter of Q2 is earthed via its mounting screw.*



## Build this simple moisture alarm

This versatile moisture alarm can be used to warn of either the presence or absence of moisture and, with the addition of one diode, can be changed from a self-resetting circuit to a manual reset. Once triggered, a piezoelectric buzzer emits a series of loud "pips" which should prove quite effective in attracting attention. Alternatively, the circuit can be used to trigger a relay.

by COLIN DAWSON

Although the basic circuit uses a piezoelectric buzzer, this could easily be replaced with a LED or buffer transistor and relay. There are numerous applications for such a device, such as saving the washing from a downpour by sounding the alert when the rain starts. Other applications might include a basement flood alarm, bathtub overflow warning, or a bed wetting alarm. Perhaps you could even use it as a novel doorbell — all the caller has to do is place his finger on the sensor board.

The sensitivity of the alarm can easily

be altered to suit different applications. With maximum sensitivity, it will be triggered by breathing heavily on the sensor. Such a mist detector may have some uses but it will generally prove much more sensitive than necessary. To avoid false triggering, the minimum usable sensitivity should be selected.

The circuit can be arranged to sound the alarm only while the abnormal condition exists, or to continue sounding the alarm until the circuit is reset. This second mode of operation would be particularly useful as a "monitor" function

whereby it is possible to tell that an abnormal condition has occurred after the event. This could, for example, be used to indicate that a livestock or pet watering system has been empty at some stage.

The sensor we have used with the moisture alarm is simply a piece of copper strip board of about 55 x 60mm. Rather than wire the sensor so that the tracks on the board form two grids with adjacent tracks, we have included a neutral third grid. The purpose of this third grid is to physically separate the two "active" grids so that a small drop of water can not trigger the alarm. This makes the device less prone to false alarms.


If the circuit is intended to monitor the level of water in a container, it would be practical to use a probe type sensor rather than the copper strip board. This would simply involve placing two electrodes about 10mm apart in a protective sheath.

The circuit is ideally suited to battery power, having a very low current drain. This is due to the fact that IC1 — a low power CMOS type — is the only part of the circuit which normally uses any power. The use of a piezoelectric transducer ensures that even when triggered, the alarm has a quite modest current drain.

More specifically, the current drain before triggering is typically a mere  $0.5\mu\text{A}$  — a tribute to the CMOS device — and, even when triggered, it is only about 2.5mA. In these circumstances the battery life would typically be limited more by shelf life than current drain.

### Circuit Description

IC1 is a 4093 quad two input NAND gate. A NAND gate is a device whose output is low only when all of its inputs are high. Any other combination of inputs result in a high output. By tying the inputs together, the gate can be made to operate as an inverter, ie, its output is in the opposite logic state to its input. The 4093 differs from the more common (and slightly cheaper) 4011 quad NAND

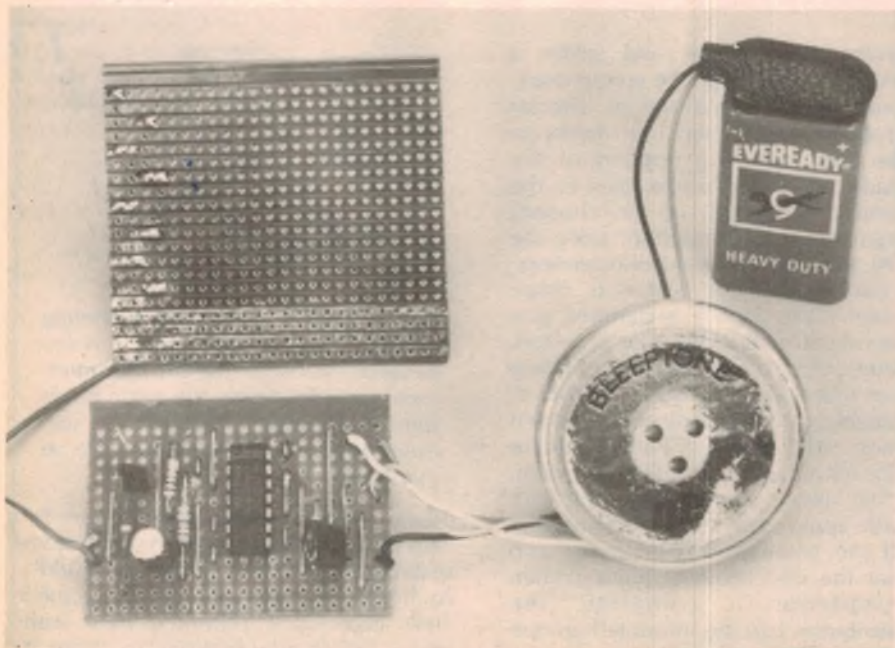

The moisture alarm is built on a small piece of strip board, while a second piece of strip board is used as the sensor. Power is derived from a 9V battery.

in that it has Schmitt trigger action on its inputs and it is this feature which makes possible the single IC design.


A Schmitt trigger is basically a device which has hysteresis, ie, its upper and lower thresholds occur at different voltages. The normal gate sees all input voltages above a certain level as logic 1 and all voltages below this level as logic 0. For input voltages in the vicinity of the critical level, only very small changes are needed to trigger a change in the output state. With a Schmitt trigger, however, there are two critical input voltages – an upper and a lower. These are typically about 2V apart for the 4093, for a 9V supply.

The moisture alarm circuit can be considered as having two main parts – a trigger and an oscillator. The type of buzzer specified for this project need only be connected to a DC power supply of between 6 and 20V in order to operate. However, it is much more effective when modulated, and this is the purpose of the oscillator.

The Schmitt trigger characteristic is used to advantage in both the detection and oscillator parts of the circuit. Hysteresis has a fairly obvious advantage as far as the detection is concerned – it ensures "clean" triggering at the critical level. With respect to the oscillator, the advantage is that it makes possible a single gate oscillator, whereas three would otherwise be required. This leaves two gates spare for the manual resetting option.

IC1a serves as the detector. Its inputs (pins 5 and 6) are connected together and normally held high by a 1MΩ resistor. Because IC1a functions as an inverter, its output (pin 4) is normally low. The moisture sensing probe is connected between pins 5 and 6 and ground but is normally open circuit (more correctly, its resistance is in the order of tens of megohms or higher). As soon as the sensor contacts water its resistance drops and pulls pins 5 and 6 low. This represents a triggered state, with the output of IC1a going high.

When wired in this mode, the alarm warns of the presence of water, ie, as a flood or rain indicator. By reversing the connections of the 1MΩ resistor and the

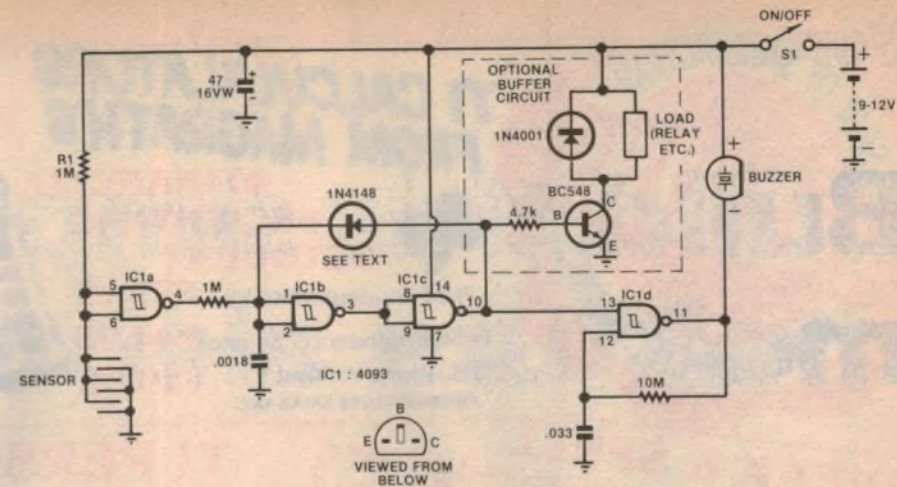

### MOISTURE ALARM

3/MSJ

The circuit has two main sections: a trigger circuit consisting of IC1a,b,c, and oscillator IC1d. Also shown is the optional relay driver circuit.

sensor (ie, resistor to ground and sensor to positive), the alarm will have the opposite sense. It could then be used to warn of low water level for households dependent on tank water or even for your car's windscreen washer. If the 1MΩ resistor is replaced with a lower value, the sensitivity will be reduced by a corresponding amount.


IC1b and c are wired as inverters, with the output of IC1b (pin 3) driving the input of IC1c (pins 8 and 9). The input of IC1b is driven by the output of the detector (pin 4) via a 1MΩ resistor. In normal operation, this resistor has no effect on the outputs of IC1a and IC1c. This may sound like a rather pointless exercise, but it contributes greatly to the versatility of the circuit.

When the circuit is required to operate in the manual resetting mode, IC1b and 1c function as a latch. A 1N4148 diode is connected from the output of IC1c (pin 10) to the input of IC1b. As soon as the trigger condition occurs, pin 10 goes high and the diode causes pins 1 and 2 to be pulled high. The 1MΩ resistor isolates the outputs of IC1a and 1c so that they are not opposing each other, thereby facilitating the latch function. To


reset this circuit simply switch off for two or three seconds. If manual reset is not required the 1N4148 diode is omitted.

IC1d is used to drive the buzzer, with one of its inputs (pin 13) used as a control. Normally, pin 13 is low and the output (pin 11) high. Because the buzzer is connected between pin 11 and the positive supply line, it is effectively disabled when pin 11 is high. When an alarm condition is detected, pin 13 is taken high and pin 11 goes low.

While pin 11 is high and the buzzer is disabled, the 0.033µF capacitor is charged via the 10MΩ resistor, taking pin 12 high. When pin 11 goes low the buzzer sounds and the capacitor begins to discharge through the 10MΩ resistor. After about 0.5s the capacitor charge, and the voltage on pin 12, falls below the lower threshold voltage of IC1d. This toggles the gate, its output goes high, and the capacitor begins to charge. After another 0.5s pin 12 reaches the upper threshold voltage and the gate toggles again. In this way the hysteresis of the Schmitt trigger makes possible a single gate oscillator. Otherwise it would have been necessary to use three conventional NAND gate inverters to make such an oscillator.

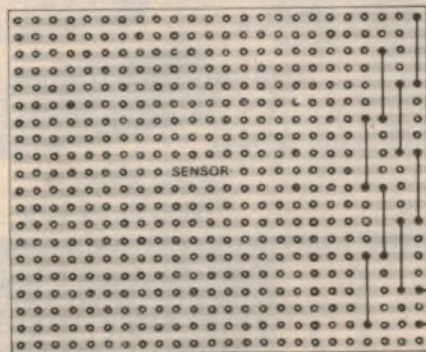

This parts overlay diagram is for an alarm which detects the presence of water and sounds a buzzer. Omit the 1N4148 diode for automatic resetting.

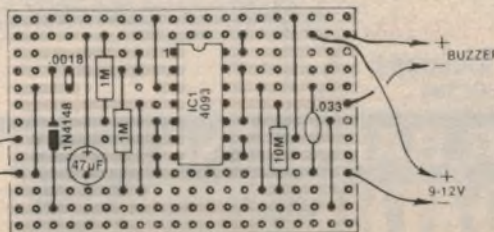



# TI CALCULATORS FROM MAGRATH'S



- FINANCIAL
- SCIENTIFIC
- STUDENT

TI-35 Student math kit \$27.15  
 TI-54 Engineers & Science \$44.95  
 TI Business Analyst II \$49.90  
 PRICES INCLUDE SALES TAX



### MEMORY BARGAINS

HM6116P-3 (HITACHI) 2Kx8 CMOSRAM \$7.50  
 MB2716 (FUJITSU) 2Kx8 EPROM \$3.00  
 MB2764 (FUJITSU) 64K EPROM \$12.00  
 MB8118 (FUJITSU) 16K DYNAMIC RAM (Intel 2118) 120ns \$4.00

## SPEAK & SPELL as featured in E.T.



\$110.00  
 INCLUDES SALES TAX

### E.T. PACK INCLUDES

- One Speak & Spell learning aid
- The new E.T. Fantasy Module
- New photo-filled activity book
- Colorful movie poster
- T-shirt decal with E.T. and Elliot

## TI PERSONAL HOME COMPUTER TI-99/4A

\$499.00 INCLUDES SALES TAX




You can buy just a video game — or you can get a full colour Home Computer

- Typewriter Keyboard
- 16K bytes RAM
- Expandable to 52K bytes RAM
- Easy to follow instructions
- Extensive range of programmes
- Educational
- Add on expandability


**EX STOCK**

### SUPER LOW PRICES



### AMPHENOL 17 SERIES DB25 PLUGS & SOCKETS

Plugs \$1.85 Sockets \$2.45  
 PRICING + 20% TAX



### 6 PACK SPECIALS

- LM 340T-5 \$2.55
  - LM 340KC-12 \$6.00
  - 74 LS 90 \$2.10
  - 74 LS 14 \$2.00
  - 74 LS 00 \$1.00
  - 4520 B \$3.70
  - 4511 B \$3.45
  - 4066 B \$2.40
  - 4016 B \$1.50
  - KBP 602 \$5.00
  - MU 5053 \$10.35
- PRICING + 20% TAX

### COMPUTER CLEANING PRODUCTS

## Safekit

SAFEKIT is also supplied without FLOPPICLENE.  
 SAFEKIT 8 inch \$72.65  
 SAFEKIT 5 1/2 inch \$70.80  
 FLOPPICLENE® 8 inch \$50.25  
 FLOPPICLENE® 5 1/2 inch \$49.50



PRICING + 20% TAX

SAFEKIT Computer Cleaning Kit is a compact, durable, vacuum-formed book kit specially designed to contain the items required for basic maintenance of a mini or micro computer. The products included in this kit are SAFECLENE, FOAMCLENE, SAFEWIPES 10 cm., SAFEBUDS, SAFECLOTHS and FLOPPICLENE 8" or 5 1/2"

## ASK FOR OUR GREAT DEAL ON MICROLINE & NORTH STAR.



### NORTH STAR ADVANTAGE

The ADVANTAGE contains a 4 MHz 280A® CPU with 64Kb of 200 nsec. Dynamic RAM (with parity) for program storage, a separate 20Kb 200 nsec. RAM to drive the bit-mapped display, a 2Kb bootstrap PROM and an auxiliary Intel 8035 microprocessor to control the keyboard and floppy disks. The display can be operated as a 1920 (24 lines by 80 characters) character display or as a bit-mapped display (240x640 pixels), where each pixel is controlled by one bit in the 20Kb display RAM. The two integrated 5 1/2 inch floppy disks are double sided, double density providing storage of 360Kb per drive for a total of 720Kb.

\$5250 + 20% TAX  
 PRICING INCLUDES GDOS or GCPM

### MICROLINE 84 DOT MATRIX PRINTER 200 cps BIDIRECTIONAL 136 COLUMN


#### Standard Features

- Bidirectional
- Short line seeking
- Graphics APA Graphics 72 x 72
- Operates with TRS-80, Apple, others
- Double width and condensed characters
- Near Letter Quality Printing 50cps
- Subscript Printing
- Superscript Printing
- Emphasised Printing
- Incremental Printing
- Tractor Feed
- 9 x 9 Dot Matrix
- Optional 2K buffer & RS232C Serial Interface



SERIAL \$1695+ 20% TAX  
 PARALLEL \$1495+ 20% TAX

## SUPER BARGAINS AT MAGRATH'S VISIT US AT OUR NEW ADDRESS



55 A'BECKETT STREET MELBOURNE, 3000. Tel (03) 347 1122



Add Sales Tax if applicable

Prices subject to alteration Prices valid until stock sold.

The 0.5s switching sequence drives the buzzer in a series of pips, but could just as easily drive a LED or other suitable load. If it is desired to drive a load continuously, the output should be taken from pin 10. This will be high when triggered. To drive loads of greater than 10mA, a transistor buffer can be used. This consists of an NPN transistor (such as a BC548) whose base is driven via a 4.7kΩ limiting resistor from pin 10. Any suitable load – such as a relay – can be connected between the collector of the transistor and the positive supply rail. A 1N4001 diode across the load protects the circuit against “kickback” voltages which will occur with inductive loads.

## Construction

In recent years, we have used printed circuit boards almost universally for our projects but, with the rain alarm, it is quite feasible to use copper strip board (such as Veroboard). With several possible variations of the basic circuit, the strip board layout can be easily altered to suit. Although strip board construction can be rather tedious for larger projects, it is ideally suited to smaller projects like the moisture alarm. It is preferable to use plated strip board, at least for the sensor, as it will resist tarnishing.

The circuit presented in the accompanying overlay diagram is for an alarm which triggers on the presence of water and sounds a buzzer. It can be wired for either automatic or manual resetting. Any other circuit configuration will require a different layout, but it is not practical for us to provide an overlay for all possibilities.

The parts list for the moisture alarm calls for a piece of copper strip board

measuring approximately 60 x 95mm. This will need to be cut into two smaller pieces – one on which to mount the components and the other for the sensor. The sensor is the larger of the two, measuring 55 x 60mm, so constructors using a different type of sensor will need only the 38 x 60mm board (our prototype was a shade smaller, but did not allow much room for modifications).

Before mounting any components on the board, cut the appropriate tracks. This can be done by drilling the holes (on the foil side of the board) where the track is to be cut. A drill of about 5mm,

rotated between the fingers, will perform this function. Alternatively, you could simply cut the tracks with a blade, but make certain that you achieve an “open circuit”.

Install the links first. If you don't have any tinned copper wire on hand, trimmed-off component leads can be used. Follow the overlay diagram for the positioning of the links. The resistors, diode (where applicable) and capacitors can now be installed.

The last component to be mounted on the board should be the IC. As this is a CMOS type, it can be damaged by static electricity. For this reason, you should connect the barrel of the soldering iron to the earth track of the board whilst soldering the IC.

The actual moisture sensor used is optional but the type shown in the overlay diagram should prove suitable for most applications. Obviously, this sensor will be located remotely from the rest of the circuit, but the distance is not critical. The rest of the components, including battery, will fit into a plastic utility box measuring 40 x 67 x 130mm. A smaller box can be used if the buzzer is to be mounted externally.

For a preliminary test of the project, it is not necessary to actually wet the sensor. Just short the two “active” lines together and the buzzer should sound. If all is well, dip the sensor in some water and the alarm should sound. Note that for manually resetting versions, the circuit must be switched off for a few seconds between each test. If your version of the alarm is particularly sensitive, it will also be necessary to dry the sensor between tests. That's about it for testing – your moisture alarm is now ready to enter service.

## PARTS LIST

- 1 4093 quad NAND Schmitt trigger
- 1 1N4148 diode (see text)
- 1 Piezoelectric buzzer
- 1 47µF/16V electrolytic capacitor
- 1 .033µF greencap
- 1 .0018µF greencap
- 1 Copper strip board (tinned), approx 65 x 95mm
- 1 9V battery (Eveready 216 or equivalent)
- 1 Battery snap to suit
- 1 10MΩ (¼W, 10%) resistor
- 2 1MΩ (¼W, 10%) resistor

### RELAY OPTION

- 1 BC548 NPN transistor
- 1 1N4001 silicon diode
- 1 12V relay with coil resistance of 200Ω or more
- 1 4.7kΩ/¼W or ½W resistor

### PRICE ESTIMATE

We estimate that the current cost of components for this project is approximately \$12.00. This includes sales tax but not the cost of a battery.

## ★ BRIGHT STAR CRYSTALS

Specifications, Dimensions and data sheets available on request


**BULK ORDERS:** In addition to our normal range we can supply quantity orders (100 up) at very competitive prices. All we ask is 50% of cost with order balance 30 days.

**DELIVERY:** 5-6 weeks from receipt of Order. Ring for quote: (03) 546 5076. Telex: AA 36004.

**NEW NSW AGENT: APP Master Communications, Sydney (02) 682 5044**

## BRIGHT STAR CRYSTALS


35 EILEEN RD, CLAYTON, VIC  
ALL MAIL TO: PO BOX 42, SPRINGVALE 3171

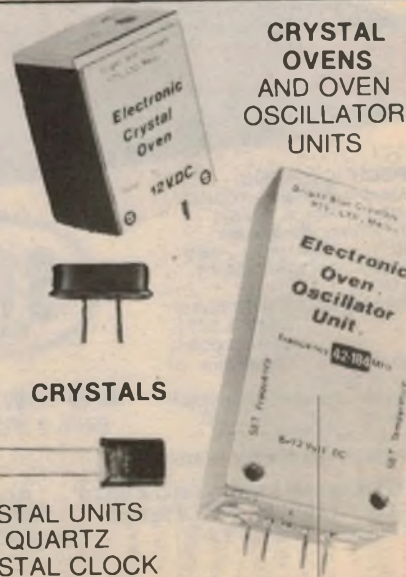

# SO PURE, IT'S WICKED

The ETI 5000 System. Pristine. Pure. Cocaine for the ears.

And to think that they are Australian made and designed. They can stand comparison with any kit or ready-built available - anywhere. In fact we still think that they are the world's best amplifiers. We should be justifiably proud of this achievement in Audio.

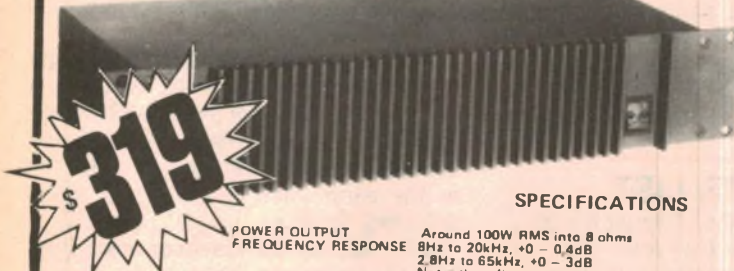

**\$319**

We regret to advise that among other things, metal work and sales tax increases have forced us to increase our prices slightly. Whilst we could have kept our costs down by using inferior components, we refused to take this course of action.


### SPECIFICATIONS

**POWER OUTPUT** Around 100W RMS into 8 ohms  
**FREQUENCY RESPONSE** 8Hz to 20kHz, +0 - 0.4dB  
 28Hz to 65kHz, +0 - 3dB  
 Note: these figures are determined solely by passive filters

**INPUT SENSITIVITY** 1V RMS for 100W output  
**HUM** -100dB below full output (flat)  
**NOISE** -116dB below full output (flat, 20kHz bandwidth)  
**2nd HARMONIC DISTORTION** <0.001% at 1kHz (0.0007% on prototypes) at 100W output using a 50V supply rated at 4A continuous  
**3rd HARMONIC DISTORTION** <0.0003% at 10kHz and 100W  
**TOTAL HARMONIC DISTORTION** <0.0003% for all frequencies less than 10kHz and all powers below clipping  
**INTERMODULATION DISTORTION** Determined by 2nd harmonic distortion (see above)  
**STABILITY** <0.003% at 100W (50Hz and 7kHz mixed 4:1)  
 Unconditional

## 5000 SERIES GRAPHIC EQUALISERS

Latest addition to the thoroughbred 5000 Series stable! David Tillbrook has once again produced a 'No Compromise' design. This new component, a 13 octave equaliser, gives you ABSOLUTE CONTROL over the acoustics of your particular listening environment. You get 3 SEPARATE CONTROLS for every octave of audio bandwidth to virtually eliminate the subtle nuances that are particular to your listening area. 13 octave equalisers have been used by professional engineers in Recording Studios and Live Concerts for over a decade now. It is no accident that the advent of the 13 octave equaliser and studio quality live line have to have 2 for stereo! Quite a lot of money - but worth it if you want the best. The Jaycar kit includes a fully pre-punched plated chassis, pre-punched heavy gauge front panel with silk-screened front panel to match the other 5000 components. It is absolutely original. You can purchase the kits one at a time for \$199 each or, for two, \$389 - a \$10 saving. If you are one of the hundreds of happy 5000 users, you are convinced that you will be just delighted with this unit.

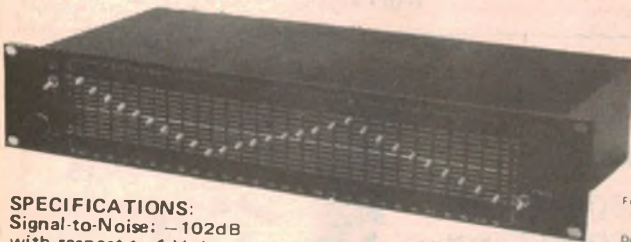

**SPECIFICATIONS:**  
 Signal-to-Noise: -102dB with respect to 1 Volt  
 Frequency Response: 12Hz - 105kHz to -1dB  
 Boost/Cut: 14dB (28dB total)  
 Distortion: 100Hz-0.007%  
 1kHz-0.007%  
 10kHz-0.008%  
 (essentially irrespective of cut or boost)  
 Current consumption (DC) Approx 100mA @ ±15V (Requires 30V AC CT)  
 Output short-circuit proof.

**\$179 EACH**

**NEW LOW PRICE!!! BUY 2 FOR \$350**

**AUSTRALIAN (NOT HONG KONG) MADE - SPECIAL BUILT RACK CABINET - QUALITY!!!**

**ALL IC SOCKETS PROVIDED**

## "BLACK MONOLITH"

REF: ETI JAN/MARCH 1981

The ultimate Hi-Fi power amplifier. We call our model the "Black Monolith" because we feel that the name symbolises the intelligence that went into the design. The Jaycar "Black Monolith" is without doubt the best kit of the project available. If you have doubts ring our Managing Director, Gary Johnston and he will tell you! (Be prepared for a long conversation).

Several kit suppliers now have 'versions' of the original 5000 P.A. which claim to be similar to ours. This is simply not the case. Space does not allow us to show EVERY refinement that has been made to the 5000 but notable ones are:

- EXCLUSIVE FEATURES:**
- Rear panel mains fuseholder
  - 1% METAL FILM resistors used
  - Flux shorting strap on power transformers
  - Original chassis bar design
  - Beryllium Oxide (Space Age Ceramic) TO 3 washers. (NOT flimsy mica)
  - Jig drilled and extruded heavy gauge, anodised heatsink bracket
  - SUPER FINISH front panel. STILL THE BEST now with blind tapped holes
  - New heavy duty heatsinks for the driver transistors. 100% extra heatsink area and anodised for greater efficiency (NOT in original design)
  - Ventilation holes in metalwork at critical points (NOT original design)
  - Extra 3 pin DIN socket on rear panel (total 2) to power new 5000 components
- IF YOU THINK THAT YOU CAN SAVE MONEY ON THESE KITS ASK YOUR SUPPLIER IF HE WILL GIVE YOU ALL OF THESE FEATURES AT THE PRICE. MAKE SURE THAT YOU GET IT IN WRITING!!** (Write for new glossy leaflet (SAE))



## "BLUEPRINT"

'One Swallow does not make a spring' Neither does a few gold RCA sockets!

Several of our competitors are imitating our "Blueprint" preamp by adding a few bits and pieces, notably gold plated RCA sockets to their standard kits. Unfortunately they have missed the point. We supply gold plated sockets in our "Blueprint" preamp but only where it makes sense to do this, i.e. on the inputs - NOT the outputs. 16 gold sockets are provided by us. This, however, does not make a "Blue print" THIS DOES:

- Low capacitance screened cable - 12 metres of it, NOT Taiwanese cable as supplied in other kits. Our cable costs us NEARLY 5 TIMES MORE than the Taiwanese stuff!
  - Original ETI designed front panel. Not an "ADAPTION". Our front panel is by far the nicest.
  - Factory pre-tempered PCB's to reduce chances of dry or noisy solder joints
  - Quality LEDs, polished finish, multicoloured display
  - IC sockets on line amp board
  - Special rear panel
  - Special low noise selection LM394H NOT CH device in MC preamp
  - Thermalloy (U.S. made) heatsink on 7805 regulator
  - English Lorin selector switches
  - Apart from the 16 gold RCA's we throw in a pair of gold plated line RCA plugs - worth \$5
  - Special Nylon rear panel grommets
- So don't "Swallow" the facts before they are properly digested!! You can't make a silk purse out of a sow's ear. Send SAE for full specs.

### SPECIFICATIONS

**Frequency Response** 15Hz-130kHz, +0 -1dB  
 Line level input conforms to RIAA equalisation -0.2dB (see detail)  
 1kHz -0.003% (total inputs direct of reduction on measuring max amount due to no gain limitations)  
 High level input, master full with respect to 300mV input signal at full output (1.2V) -92dB flat -100dB A weighted

**Distortion** 5M input, master full with respect to full output (1.2V) at 5mV input, 500 ohm source resistance connected -86dB flat -92dB A weighted

**S/N ratio** MC input, master full with respect to full output (1.2V) and 200mV input signal -71dB flat -75dB A weighted

**ETI 478MM MOVING MAGNET INPUT STAGE**  
 Gain 74 times  
 Frequency Response Conforms to RIAA Equalisation -0.2dB  
 Total Harmonic Distortion <0.001% 1kHz 10mV RMS input  
 -78dB with respect to 5mV RMS input signal, i.e. 135mV RMS  
 Headroom Total maximum input noise 122mV A input shorted  
 Noise 216mV flat input shorted

**ETI 478MC MOVING COIL INPUT STAGE**  
 Gain 38  
 Frequency Response 7Hz -135Hz -0 -1dB  
 Total Harmonic Distortion <0.003% 1kHz 30mV input  
 Noise Total equivalent input noise 83mV flat input shorted  
 43mV A input shorted  
 56mV flat after RIAA Eq input shorted  
 34mV A after RIAA Eq input shorted

- FUNCTIONS**
- MOVING COIL INPUT
  - MOVING MAGNET (DYNAMIC) CART
  - INPUTS (2 OFF)
  - BLUENER INPUT
  - BAUX INPUTS (2 OFF)
  - TAPE INPUTS (2 OFF)
  - INPUT LEVEL CONTROL
  - TAPE OUTPUTS (2 OFF)
  - 800Hz CALIBRATION OSCILLATOR
  - LED AVERAGE (VU) & PEAK LEVEL METERS -48dB TO -9dB
  - MODE SWITCH STEREO
  - BALANCE CONTROL
  - LINE OUT MONITOR OUT
  - MONITOR VOLUME CONTROL
- FEATURES**
- EXTREMELY CLOSE TRACKING TO RIAA PHONO EQ
  - GOLD PLATED CONNECTORS ON ALL INPUTS
  - ENGLISH LORIN LOW NOISE SELECTOR SWITCHES
  - LOW NOISE 1% 500m METAL FILM RESISTORS USED
  - TINNED FIRE GLASS PCB
  - LOW CAPACITANCE SCREENED CABLE USED THROUGHOUT
  - QUALITY I.C. SOCKETS
  - SPECIAL REAR PANEL
  - MULTICOLOURED RECTANGULAR LED-USED



COMPLETELY BUILT  
AND TESTED -  
NOT A KIT!!



CONTAINS EQUIVALENT OF  
THOUSANDS OF TRANSISTORS  
- USES MASSIVE CUSTOM  
LSI CHIP TO ACHIEVE  
LOW PRICE



only  
**\$199**  
complete

# THE BEST CAR COMPUTER BELOW \$200

Never before has such a comprehensive car performance computer been offered at such a low price!! Once again miracle microprocessor technology has enabled us to pass enormous savings on to you!! But don't let the low cost fool you. The "Voyager" car computer IS THE MOST COMPREHENSIVE PRODUCT THAT WE HAVE SEEN. No other car computer matches this one AT EVEN TWICE THE PRICE! You could buy a \$20,000 Holden and not get a better car computer!! Just check the features. We are sure that you will calculate that the "Voyager" represents outstanding value!

## FEATURES

- INSTANT FUEL CONSUMPTION IN LITRES/100KM AND MPG!! (MOST OTHERS HAVE ONLY ONE OF THE ABOVE) JUST SWITCH FROM ONE TO THE OTHER AS YOU DRIVE ALONG.
- INSTANT SPEED, TIME AND OTHER FUEL DATA.
- VISUAL AND AUDIBLE EXCESS SPEED ALARM.

## INSTALLATION


The "Voyager" comes complete with an unbelievable array of mounting configurations, on dash, under dash or stalk mount. ALL installation hardware is supplied (even a roll of insulation tape!) as well, of course, as the speed and fuel sensors. A lavishly illustrated installation manual is provided as well as a comprehensive operators manual.

AVAILABLE FROM: ROD IRVING MELBOURNE, ALTRONICS PERTH,  
TOMORROW'S ELECTRONICS GOSFORD 247246

## 8 CHANNEL MIXER KIT

The Jaycar 8002 Mixer was originally conceived to be the successor to the very popular ET1414 Master Mixer. The 414 was basically configured as a 'stage' mixer and suffered from a number of severe technical limitations - notably poor signal-to-noise figures. Enormous advances in Audio IC's have occurred since the 414 was designed. Jaycar engineers have taken advantage of this. The incredibly low noise and distortion figures of the 8002 are a testimony to the sound basic design of the mixer coupled with the performance capability of these IC's. Whilst the 8002 is the ideal 8 channel compact stage mixer, other applications have been kept in mind. AS A "STUDIO" MIXER. The prime requirement of a studio mixer is that it must be quiet - i.e. have good S/N. Due to the fact that the "miracle" 5534 IC's are used in the 8002 studio applications are entirely feasible. In addition to this, metal film resistors are used in critical signal areas. AS A DISCO MIXER. The balanced input feature of the 8002 is not really necessary for disco use. This section can easily be bypassed with either a moving magnet (Dynamic Cartridge) preamp, or a moving coil preamp. The sensible format of the 8002 and tremendous equalization facilities should make this mixer popular for disco use.

GREAT  
VALUE  
FOR  
MONEY

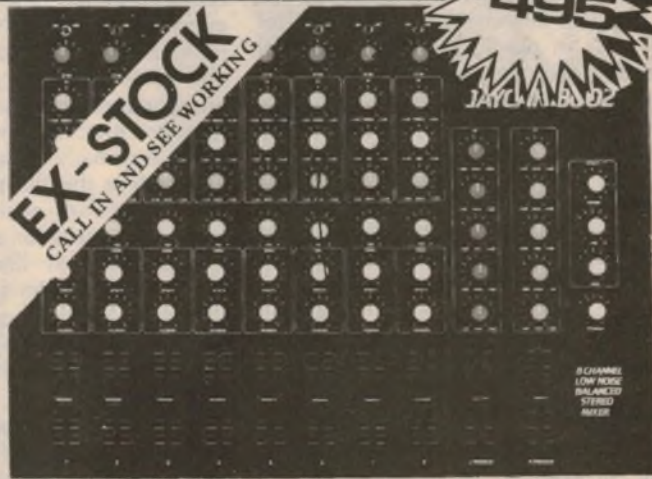


- Balanced (600 Ohm) Mic. Inputs/Line Inputs.
- Cannon Connectors included in the price.
- Bass, Mid & Treble Equalization on each Input.
- "Effects" (i.e. Echo etc.) capability.
- Foldback and Stereo Pan on ALL 8 Inputs.
- 60mm Slide Faders used throughout.
- 19" Rack Mount capability (or Console Mount).
- Professional Black Front Panel with Format borders & multi-coloured knobs to assist function identification.
- VU Metering.

## STEREO Synthesiser



from  
**\$39<sup>50</sup>**

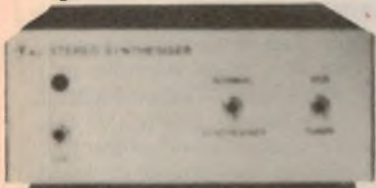

One of the most effective projects that we have seen. Creates an extremely realistic stereo effect from any line level mono signal! The effect on your signal is staggering. The audio track on your VCR comes to life! Just like the movies! You can convert your T.V., AM tuner or anything now to wall-to-wall stereo sound. Jaycar has two versions of this kit; a short form which enables you to build the synthesiser inside other equipment and the full free standing unit.

SHORT FORM kit contains PCB and all electronics associated with board but not power transformer or case **\$39.50**  
FULL KIT contains everything including power transformer and case **\$49.50**

Ref: EA September 1982

## Jaycar NUMBER 1 FOR KITS

125 YORK STREET, SYDNEY 2000  
PHONE 264 6688 TELEX 72293  
"NEVILLES CORNER"  
C/O CARLINGFORD & PENWANT HILLS ROAD  
CARLINGFORD  
PHONE 872 4622 or 872 4444  
MAIL ORDERS TO: BOX K 39 HAYMARKET, SYDNEY 2000  
POST AND PACKING CHARGES: NSW \$9.99 (S1.50 + S10.49) QLD \$12.20 (S1.50 + S10.70) VIC \$12.20 (S1.50 + S10.70) WA \$12.20 (S1.50 + S10.70) SA \$12.20 (S1.50 + S10.70) TAS \$12.20 (S1.50 + S10.70) NT \$12.20 (S1.50 + S10.70) ACT \$12.20 (S1.50 + S10.70) Other states \$12.20 (S1.50 + S10.70) Please add 10% GST  
\$1.00 up 15.00

Mail Order By **BANKCARD**  
Via Your Phone



## Step-by-step alignment details

# A high performance AM tuner: Pt 3

Correct alignment is crucial in order to obtain optimum performance from our new Playmaster AM tuner. In this article, we describe the construction of a simple AM tuner alignment kit and give full alignment details. Also provided is a list of station frequencies for major Australian cities.

by JOHN CLARKE

Tuner alignment has always been a problem for the average constructor due to a lack of suitable test equipment. Our new Playmaster AM tuner overcomes this problem by using a simple alignment module in conjunction with the tuner's inbuilt frequency meter (ie, the digital readout). The only other items needed for accurate alignment are a multimeter and a set of plastic alignment tools for tweaking coil cores and trimmers.

Basically, the operations involved are straightforward and repetitive. They simply involve adjusting coils, trimmer capacitors and potentiometers while observing either the digital tuner readout or the multimeter. Note that a plastic alignment tool must be used to adjust the coil slugs. Do not use a screwdriver or other metallic object, since these will affect the coil operation and give incorrect results.

### Preamble

Before detailing the step-by-step alignment procedure, let us first give a general outline of the alignment process

so that you have an overall picture of the whole process. As you know from reading the two previous articles, the tuner relies on a series of fixed and variable tuned circuits in order to provide its superior level of performance. The alignment procedure can be regarded as an initial "tune-up" to ensure that every circuit section is working at peak performance. While most readers will be unfamiliar with alignment of superheterodyne receivers, the process is not difficult but it does have a lot of individual steps, especially for a high performance unit such as this Playmaster.

Three sections of the tuner circuit require adjustment for alignment: the local oscillator, the RF bandpass filters, and the IF filter sections. Two further adjustments, although not strictly a part of the alignment procedure, are made to the signal strength meter and whistle filter circuits.

The AM tuner alignment module consists of two separate and adjustable RF signal generators plus a buffer amplifier and filter detector, all on a small PC

board. The buffer converts your 20k $\Omega$  per volt multimeter into one with a 10M $\Omega$  input impedance. This high input impedance prevents any loading on the tuner circuit which may otherwise affect circuit operation. A description of the circuit and constructional details for the alignment unit are shown in the accompanying panel.

### Oscillator range


The first step in the alignment procedure is to adjust the range of the local oscillator so that the broadcast range can, in fact, be tuned in. We have designated the AM broadcast coverage as 520kHz to 1630kHz and since the local oscillator is always 455kHz above the tuned station frequency, this means that the oscillator must be variable over the range from 975kHz to 2085kHz.

However, since the digital readout in the Playmaster tuner actually measures the local oscillator frequency and "offsets" the reading by 455kHz, all we have to do is to adjust the local oscillator coil and trimmer capacitors so that the digital readout can be varied from 520kHz to 1630kHz. In this respect, alignment of the Playmaster tuner is easier than for a conventional superhet without a digital display.


### RF Filters

The second step is to adjust the RF filters so that they track together and provide the same bandwidth throughout the range of the tuning capacitor. In this case, they are stagger tuned at the low frequency end of the broadcast band and peaked together at the high frequency end. The RF filters must also "track" with the local oscillator so that a 455kHz difference signal is always obtained at the output of the mixer.

Actually, it is quite difficult to achieve perfect tracking across the entire broadcast band due to non linearities in each section of the tuning gang. These non linearities cause slight tuning differences between the RF filters and the oscillator at various settings of the tuning capacitor. In practice, these differences have negligible effect and it is sufficient

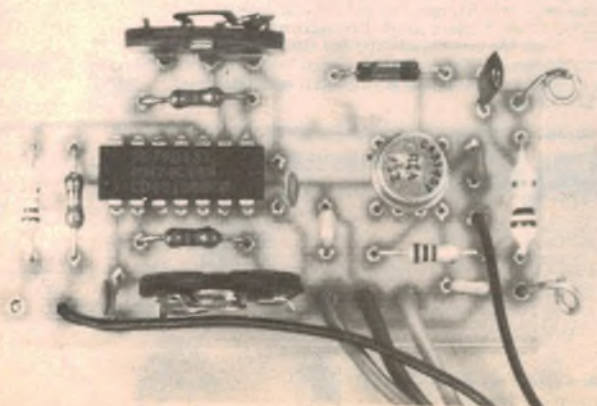

*This simple alignment module generates two spot frequencies (600kHz and 1300kHz), and buffers the input to your multimeter.*

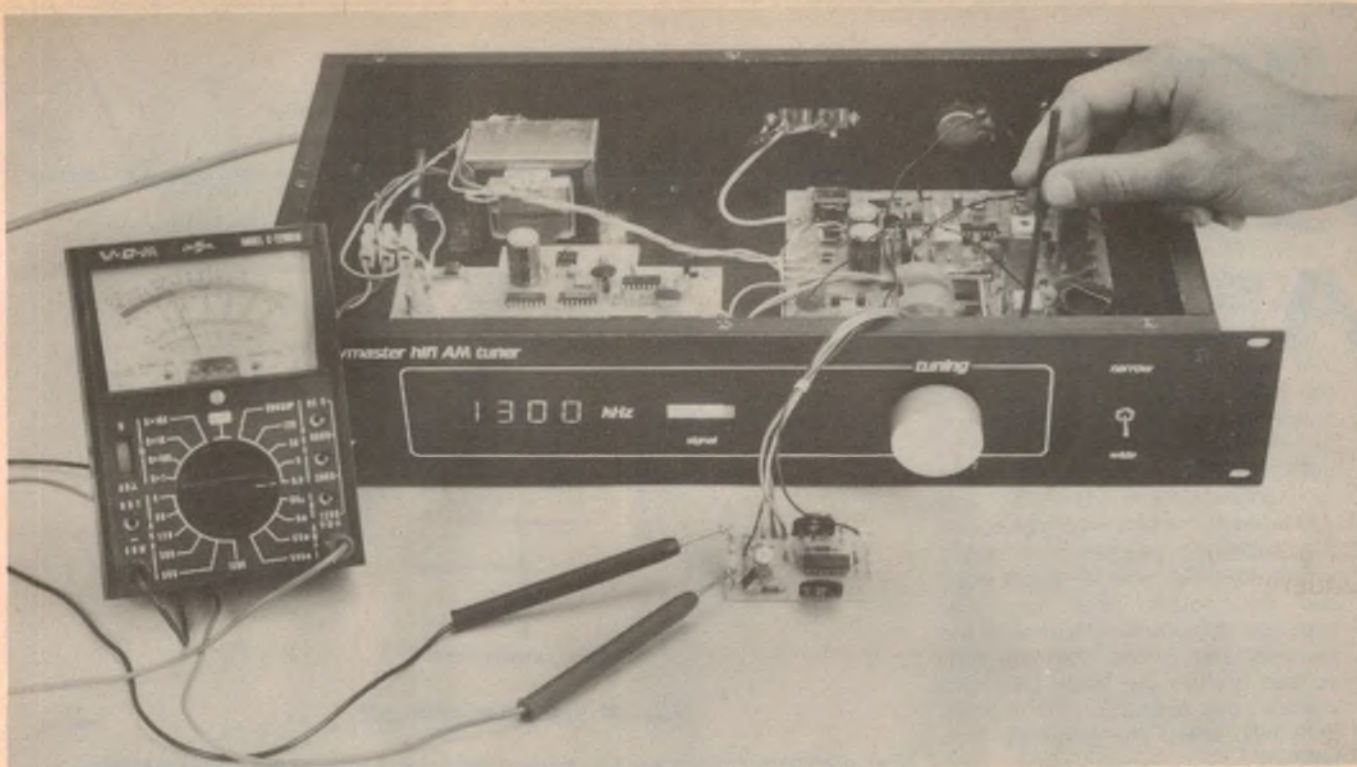

This photo shows the trimmer capacitors in the 1st and 2nd RF stages being adjusted for a peak at 1300kHz.

to carry out alignment at just two frequencies – 600kHz and 1300kHz.

Stagger tuning for the RF filters is carried out in two steps. One RF filter, L2, is peaked at 604kHz while the second RF filter, L3, is peaked at 590kHz. What do we mean by “peaking”? In this case, we mean adjusting the coil slugs so that the maximum amount of signal is passed through at the desired frequency.

We measure the peak by monitoring the signal output at TP1 on the tuner circuit board. The op amp on the alignment module buffers and rectifies the signal at TP1 and feeds it to your trusty multimeter which is set to the lowest available DC voltage range. The respective coil slugs are then adjusted to give a maximum deflection on the multimeter (or maximum reading on a DVM).

We first set the tuning capacitor so that the digital readout displays 600kHz. Then we feed in a 604kHz signal from the alignment module to the antenna terminals. We then “peak” L2 as just mentioned. This done, the alignment module is set to feed in 590kHz to the antenna terminals and L3 is peaked.

At the other end of the dial, so to speak, we peak both L2 and L3 to the same frequency, 1300kHz. First the tuning capacitor is set so that the digital readout displays 1300kHz and a 1300kHz signal from the alignment module is fed into the antenna terminals. Then the rotary trimmer capacitors associated with L2 and L3 are both adjusted for maximum response at this frequency.

Unfortunately, this is where you discover how painstaking alignment must be because the adjustment of the trimmer capacitors will affect the previous adjustment performed at around 600kHz. Ergo, the stagger tuning at 600kHz must be repeated. And you guessed it, this effects the adjustment at 1300kHz. So the adjustments have to be repeated several times until you achieve the overall best settings. Normally, two repeat adjustments will be sufficient.

### IF filter circuits

By now, you must be getting the general drift of alignment. Yes, the next step is to optimise the response of the IF filter circuits to 455kHz while still ensuring that they have the correct bandwidth.

To obtain that correct bandwidth, the slugs of the double-tuned IF transformers, L6 and L7, are peaked at slightly different frequencies. At the same time, in order that we can distinguish between the performance of both transformers, we heavily “damp” one coil with a resistor while the other is being peaked.

### Narrowband ceramic filter

Having gone through the alignment procedure to this stage, it is quite likely that the centre frequency of the ceramic filter will be found to be not precisely at 455kHz. This is because the manufacturing tolerances on the centre frequency of the ceramic filter are  $\pm 2$ kHz. If the centre frequency is within  $\pm 1$ kHz of

455kHz, it is possible to use one or another combination of the capacitors C4, C5 and C6 to shift it to 455kHz precisely.

If the centre frequency is further away from 455kHz than  $\pm 1$ kHz, more drastic action is called for. No, you don't need that large hammer but it will be necessary to change the offset frequency of the digital readout circuitry. The offset frequency is selected by connecting the jam inputs of ICs 5, 6, 7 and 8 to the positive supply or 0V on the digital readout board. If you have not already done so, you should read through the full circuit description of the digital readout board in the October 1982 issue.

For the purpose of shifting the offset frequency to suit the ceramic filter centre-frequency it will only be necessary to change the jam inputs on IC5, as described later.

Unfortunately, if it is necessary to shift the offset frequency of the digital readout, it will then be necessary to repeat the alignment of the IF filter transformers. Strictly speaking, the local oscillator range should also be readjusted but since it will have been shifted by a maximum of only 2kHz you may elect to neglect this final touch.

Several steps in the alignment procedure remain to be explained. First, it is necessary to disable the automatic gain control (AGC) circuit on the tuner board. This is a standard requirement for the alignment of any superhet radio since if the AGC was operational it would

## AM tuner alignment unit


The circuit for the AM tuner alignment unit consists of two ICs. A hex Schmitt trigger, IC1, is used to provide the two RF oscillators, while a high input impedance op amp, IC2, is used as the buffer for the multimeter.

IC1c is used as the 600kHz oscillator and functions as follows: Assuming the 100pF capacitor at the input, pin 9, is initially discharged, the input will be low and the output, pin 8, will be high. The 100pF capacitor now begins to charge via the 6.8kΩ resistor and 2.2kΩ trimpot until the voltage across the capacitor reaches the upper threshold of the Schmitt trigger input and the output goes low. The capacitor then discharges through the resistors and, when the capacitor voltage reaches the lower threshold voltage, the output of the Schmitt goes high again. The sequence then repeats.

Frequency adjustment is made with the 2.2kΩ trimpot; the smaller the value, the faster the capacitor will charge and discharge to provide a higher frequency.

IC1d buffers the output of the oscillator. This provides constant loading of the oscillator, regardless of the loading at the output of the buffer. The 22kΩ resistor at the output of the buffer provides attenuation of the signal to prevent overloading the AM tuner input circuitry.

IC1a is used for the 1300kHz oscillator and operates in a similar

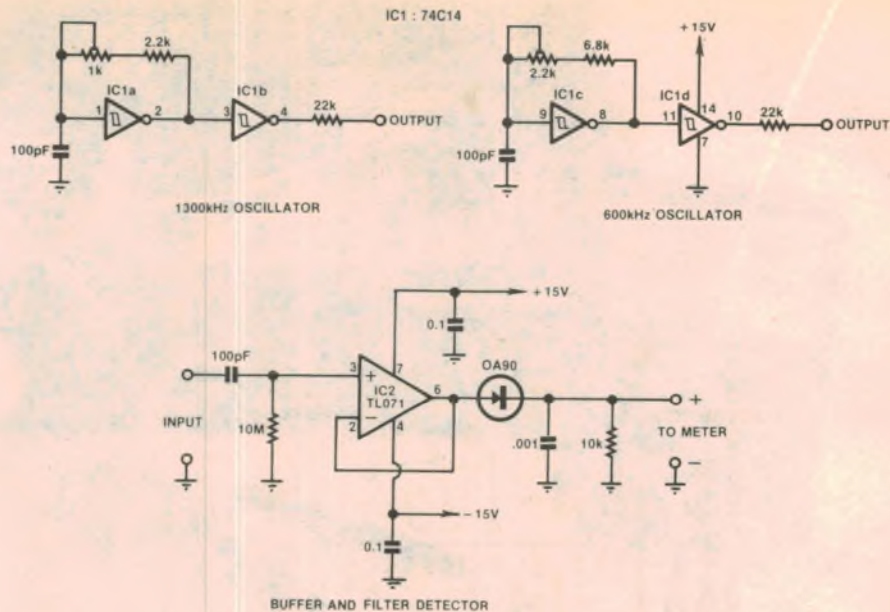

AM TUNER ALIGNMENT UNIT

71R01

The alignment circuit consists of two CMOS oscillators and a buffer amplifier.

manner to the 600kHz oscillator. The 2.2kΩ resistor and 1kΩ trimpot provide the capacitor charge/discharge path. Frequency adjustment is with the 1kΩ trimpot. Buffering is provided by IC1b, while the 22kΩ resistor on the output provides signal attenuation as before.

A point to note about both oscillators is that they produce square waves and this means that the oscillator outputs are rich in harmonics. However, this should not present any problems since the oscillators are only intended to be used at their fundamental frequencies, ie, close to 600kHz and 1300kHz.

Op amp IC2 is connected as a voltage follower and this configuration, in conjunction with the IC FET input stage, provides a very high input impedance. The input is AC coupled with a 100pF capacitor and DC bias for the amplifier provided with a 10MΩ resistor. Consequently the input impedance of the buffer circuit is about 10MΩ at RF frequencies.

The output of the op amp is rectified by a germanium diode and filtered with a .001μF capacitor and 10kΩ resistor. The low DC voltage range of a multimeter can be used at this output.

automatically compensate for any changes in level brought about by the alignment adjustments. So, in order to perceive the changes wrought by each alignment step, the AGC is disabled. This is done by LK2 on the PC board.

### Alignment procedure

Before starting the alignment procedure it is necessary to connect the supply leads from the alignment oscillator unit to the power supply outputs provided on the tuner PCB. These can be found near the 470μF filter capacitors, as shown on the tuner overlay diagram of last month. Link LK1 should be out of circuit, while LK2 should be in circuit to remove AGC action. Also, set each of the 3-30pF trimmer capacitors so that the capacitor plates are about 20% in mesh. The 10kΩ trimpot near IC5 should be initially adjusted to half setting.

Note that link LK1, which disables the

oscillator, is not required if you use the tuner alignment module described here. This is because the output of the alignment module is high enough to swamp the local oscillator signal. If, however, an alternative signal generator with lower output is used, LK1 may have to be inserted to disable the local oscillator when aligning the RF filters.

Note also that when soldering during the alignment procedure, power to the tuner should be switched off.

#### STEP 1

##### Setting the Local Oscillator Range

- Set the tuning capacitor so that the capacitor plates are fully meshed and adjust the slug in L9, the 7348 oscillator coil, until a reading of 520kHz is shown on the display.

- Set the tuning capacitor so that the plates are fully open and adjust the trimmer capacitor associated with the local


oscillator for a reading of 1630kHz.

- Return to the low frequency end of the band (plates fully meshed) and readjust the L9 slug for a reading of 520kHz. This done, return to the high frequency end of the broadcast band and readjust the trimmer for 1630kHz. Return again to the low frequency end and check that the reading is still 520kHz. If not, continue with the adjustments until 520kHz and 1630kHz are displayed at the extreme settings of the tuning capacitor range.


#### STEP 2

##### Aligning the RF Filters

- Adjust the tuning capacitor for a reading of 600kHz. Connect the signal input of the alignment unit to test point TP1 on the tuner PCB, and connect a multimeter to the alignment unit. Set the multimeter to the 0.6V DC range (or similar range). Disconnect the local

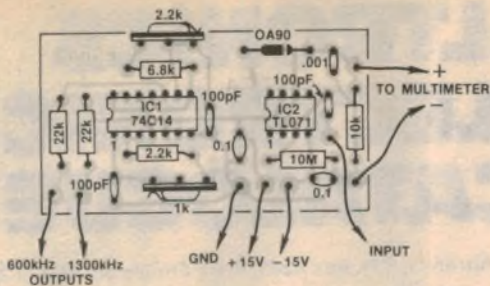

Parts overlay and actual-size PC artwork for the alignment module.

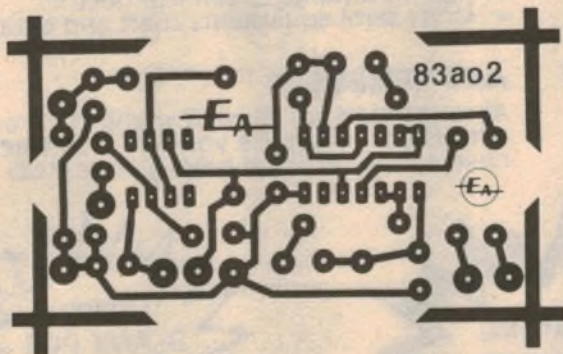

Power supply filtering is provided by two 0.1 $\mu$ F capacitors, one connected from ground to the positive supply and the other from ground to the negative supply.

We constructed the AM tuner alignment unit on a printed circuit board coded 83ao2 and measuring 64 x 35mm. Follow the overlay diagram when inserting the components on the PCB. Make sure that the polarity conscious components — the diode and the ICs — are oriented correctly. We made eyelet holes from two short pieces of tinned copper wire to accept the multimeter

probe leads, and these can be seen in the accompanying photograph. Flying leads are then soldered to the power supply connections, the buffer input lead, and the oscillator output leads.

In use, the AM tuner alignment unit is powered from the  $\pm 15$  volt rails of the AM tuner. The relevant oscillator output (either 600kHz or 1300kHz) is connected to the antenna input of the tuner, while the input of the buffer is connected to either of the test points, TP1 or TP2 (see accompanying article).

oscillator connection to the digital tuner readout PCB and connect the output of the 600kHz alignment oscillator in its place.

- Adjust the 2.2k $\Omega$  trimpot of the 600kHz oscillator until a reading of 149kHz is shown on the display. The oscillator is now operating at 149kHz + 455kHz, or 604kHz. Disconnect the 600kHz oscillator from the tuner readout and connect the oscillator output to one of the antenna inputs of the tuner. Now adjust the attenuator so that no more than full scale is shown on the LED signal strength meter. This is necessary to ensure that the tuner circuits are not overloaded, thus obscuring the adjustment effects.
- Adjust the slug of L2, the 7155 antenna coil, until a peak is shown on the multimeter. Note that the coil will peak at two positions: towards the top of the coil and at the bottom of the coil. The

slug should be screwed in until the coil peaks at the bottom position. This provides greater coupling between the two windings of the coil.

- Disconnect the 600kHz oscillator connection from the antenna input of the tuner and reconnect it to the digital tuner readout. Adjust the 600kHz oscillator until it reads 135 on the display. The oscillator is now operating at 135kHz + 455kHz, or 590kHz. Reconnect the oscillator to the antenna input of the tuner and adjust the slug in L3, the 2nd RF coil, for a peak towards the top of the coil.
- Connect the local oscillator to the digital tuner readout and adjust the tuning capacitor for a reading of 1300kHz. Now disconnect the local oscillator from the digital tuner readout and connect the 1300kHz alignment oscillator. Adjust this oscillator for a reading of 845kHz on the display by adjusting the 1k $\Omega$  trimpot. The

oscillator is now operating at 1300kHz. Connect the 1300kHz oscillator to the antenna input of the tuner and adjust the attenuator for nearly full scale on the LED signal level display. Adjust the trimmer capacitors in each RF section for a peak on the multimeter.

- Reconnect the local oscillator to the digital tuner readout and set the tuning capacitor for a reading 600kHz. Repeat step 2.

### STEP 3 Aligning the IF filters

- Set the tuning capacitor for a 600kHz reading, then connect the 600kHz alignment oscillator to the digital tuner readout. Adjust the 2.2k $\Omega$  trimpot for a reading of 145kHz. The oscillator is now operating at 600kHz. Connect the 600kHz oscillator to the antenna input of the tuner and set the wide/narrow switch to the wide position.
- Connect the buffer input of the alignment unit to test point TP2 (near IC6).
- Now solder R1 into position — you can use any value from 4.7k $\Omega$  to 10k $\Omega$ . This damps the first winding of the 1st IF coil. Set the attenuator so that the LED signal display shows close to maximum reading and adjust the top slug in L6 for a peak towards the top of the coil. Remove R1 and solder it in the R2 position. Again adjust the attenuator, then adjust the bottom slug in the L6 coil for a peak towards the base of the coil.
- Remove R2 and connect it in the R3 position. Readjust the attenuator, then

## PARTS LIST

- 1 PCB, code 83ao2, 35 x 64mm
- 1 74C14 hex Schmitt trigger
- 1 TL071, LF351, CA3140 FET input op amp
- 1 OA90, OA91, germanium diode
- 2 0.1 $\mu$ F monolithic capacitors
- 1 .001 $\mu$ F metallised polyester capacitor
- 3 100pF ceramic capacitors

### RESISTORS (¼ or ½W, 5%)

- 1 x 10M $\Omega$ , 2 x 22k $\Omega$ , 1 x 10k $\Omega$ , 1 x 6.8k $\Omega$ , 1 x 2.2k $\Omega$ , 1 x 2.2k $\Omega$  large vertical trimpot, 1 x 1k $\Omega$  large vertical trimpot.

### MISCELLANEOUS

Hook up wire, solder, multimeter, etc.

We estimate the current cost of components for this project is

**\$8.00**

This includes sales tax.

HERE IT IS!  
THE

# 1983 ALTRONICS ELECTRONIC COMPONENTS CATALOGUE



If someone has already snaffled the catalogue send \$1 to cover P & P to Altronics, P.O. Box 8280, Perth Stirling St., W.A. 6000

- ★ Quality Products at direct import prices.
- ★ Save up to 50% on our competitors prices.
- ★ Overnight delivery Australia wide.
- ★ Bankcard phone orders service to 8pm Mon-Fri, and to 3pm Saturday. (We rebate the phone call cost for phone orders over \$50).
- ★ We guarantee a "Price Freeze" on all catalogue prices for the duration of 1983.
- ★ Check some of the savings on our nearest competitors 1982 prices.

**PLUS**

- ★ Huge new range of semiconductors.
- ★ Handy semi equivalents chart and data section.

**AND REMEMBER**

Altronics staff are all keen young electronics enthusiasts — just like yourself — so when you need a little technical help, give us a call.

**EXAMPLES**

NE5534AN  
OP AMP IC  
**\$1.95**

Why pay \$4.50?

B1010 NATIONAL  
SEMICONDUCTOR  
LINEAR DATA BOOK  
**\$12.50**

Why pay our nearest competitor's \$15.00?

H0702  
BLANK PCB  
300 x 300  
**\$4.50**

Why pay \$4.95?

**FOR THE VERY QUICK!**

Here are some incredible bargains on 1st quality NON catalogue lines — to clear. (We suggest you phone orders now to reserve yours).

**ETI 469 PERCUSSION SYNTHESIZER**

See ETI April '82 for full details



Superb Sigea Case Included.

- 1 Simulates drums, cymbals, snares, bongos and lots of other weird sounds
- 2 Play manually like a set of drums
- 3 Provision for programming (plays automatically) ETI advise sequencer to follow
- 4 The ALTRONICS KIT is housed in the superb looking Sigea EC 1002 case as used by ETI.
- 5 The ALTRONICS KIT includes enough hardware to flush mount all controls

K 1040 ..... ~~\$89.50~~  
1/2 Price ..... \$45 ea  
ALSO free sequencer valued at ..... \$19.50 included

**SMOKE DETECTOR**  
Quality GE Manufactured  
fully guaranteed



- ★ Contains Americium 241 Ionization Chamber
  - ★ 9V Mallory Duracell included
  - ★ Contains very loud solid state buzzer
  - ★ 12 month factory warranty
  - ★ Emits almost earpiercing alarm sound at the incidence of smoke or fire
  - ★ Easy to fit (less than 5 minutes)
  - ★ Protect your family and home from fire now
- WAS \$59.50 ..... NOW Incredible \$10.00 ea

**SUPERB QUALITY SLIMLINE GRAPHIC EQUALISER / AMPLIFIER**



Incredibly compact 22H x 145W x 132D 7 key 30W/30W Led Level meters/Qual. Japan Manf. Freq. Response 20HZ-30KHZ ..... NOW \$49.50

**18 watt PA MEGAPHONE**

Superb quality TOA 18 watt Pa Megaphone up to 1km range. Smooth crystal clear PA reproduction



Powered by 6 x C cells

WAS \$99.50 ..... NOW \$69.50

**PLESSEY FOSTER 50 watt PA / GUITAR SPEAKERS**

12" (300mm)  
8 OHM



Huge 50mm Voice Coil  
Incredibly efficient.  
WAS \$69.50

20 left ..... \$39.00 ea  
Incredible value

**ALTRONICS**  
105 STIRLING ST., PERTH  
(09) 328 1599

Mail Order to P.O. Box 8280  
Stirling St, Perth, W.A. 6000

ALTRONICS ... ALTRONICS ... ALTRONICS ... ALTRONICS ...

ALTRONICS ... ALTRONICS ... ALTRONICS ... ALTRONICS ...

adjust the top slug in L7 for a peak towards the top of the coil. Remove R3 and connect it in the R4 position. Readjust the attenuator, then adjust the slug in the bottom of the coil for a peak near the base of the coil. Remove R4. Adjust the attenuator and adjust L8 for a peak towards the top of the coil.

### STEP 4 Adjusting the Ceramic Filter

● Insert a link in the position marked C5, located near the ceramic filter. Switch the wide/narrow switch to narrow. Connect the local oscillator to the digital tuner readout and adjust the tuning capacitor to 600kHz. Connect the 600kHz alignment oscillator to the digital tuner readout and adjust it for a reading of 145kHz. The oscillator will now be operating at 600kHz. Connect the output from the oscillator to the antenna input and adjust the attenuator for a full scale reading on the LED signal level display.

● Adjust the 2.2k $\Omega$  trimpot of the 600kHz oscillator until a peak reading is observed on the multimeter. Now connect the output of the 600kHz oscillator to the digital tuner readout and check the display reading. It may deviate from 145kHz.

If the reading is higher than 145kHz, then the ceramic filter centre frequency is lower than 455kHz. Similarly, if the reading is lower than 145kHz, then the ceramic filter centre frequency is higher than 455kHz.

If the ceramic filter centre frequency is within 1kHz of 455kHz, it may be possible to shift it by using capacitors C4, C5 and C6. If, however, the ceramic filter is off frequency by more than 1kHz, then the offset adjustment for the digital tuner readout is altered and the IF filters realigned to suit the ceramic filter.

We found that a value of 4.7pF for both C4 and C5 would shift the frequency down by 1kHz, although this may vary for the particular ceramic filter. C5 is kept as a link. To raise the frequency, C4 and C5 are detached and a capacitor used at C5 to increase the resonance of the filter. We found that a .001 $\mu$ F capacitor would shift the frequency up by 1kHz. Again this value may vary depending upon the particular ceramic filter used.

● If the ceramic filter is more than 1kHz away from 455kHz, leave C5 as a link and delete C4 and C6. In this case, the offset frequency of the digital tuner readout must be adjusted to suit the centre frequency of the ceramic filter using links J1 to J4 for IC5. The following paragraph lists the changes necessary for the four expected IF values. All other links remain as for the 455kHz offset.

For an offset of 456kHz, the preload


value is 9544 and J1, pin 4 of IC5, connects to the - rail. For an offset of 457kHz, the preload value is 9543 and link J2, pin 12, connects to the + rail, while J3, pin 13, connects to the - rail. For an offset of 454kHz, the preload value is 9546 and link J1, pin 4, connects to the - rail and J2, pin 12, connects to the + rail. For an offset of 453kHz, the preload value is 9547 and link J2, pin 12, connects to the + rail.

Once the offset of the digital tuner readout has been altered to suit the ceramic filter, it is necessary to realign the IF filters. To do this, set the tuning capacitor for a reading of 600kHz on the display. Now connect the 600kHz alignment unit oscillator to the digital tuner readout and adjust its frequency to 600kHz. Note that the display should be

this an antenna will be required.

The loop antenna is made from a suitable length of insulated copper wire arranged as an upright rectangular loop. Ideally it should be oriented so that the plane of the loop points towards the transmitting antenna. In addition, it should be located close to the tuner to avoid a long feedwire. A good place to loop the antenna would be around a window frame or around a wall. In all cases, the pickoff point should be halfway up one vertical side, preferably on the side furthest from the transmitter. The feedwires are then twisted together and run to the antenna inputs on the tuner.

For strong signal areas, a small loop 1-metre square may be satisfactory, but for low signal areas a larger loop will

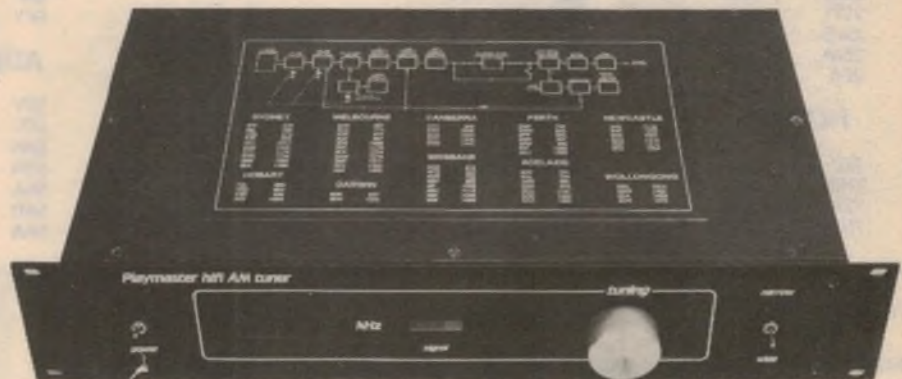

The top panel artwork features a block diagram of the tuner and lists the station frequencies for major cities in Australia.

set to read 600 minus the offset of the digital tuner readout. Thus the display should read 143 for a 457kHz offset; 144 for a 456kHz offset; 146 for a 454kHz offset; and 147 for a 453kHz offset.

The IF filters are now realigned by soldering a resistor to R1, R2, R3 and R4 in turn as described in step 3.

### Other adjustments

With the tuner now aligned, the LED signal level display can be adjusted. With the buffer of the alignment oscillator still connected to TP2 and 600kHz applied to the antenna input, adjust the attenuator for a 0.04V reading on the multimeter. Now adjust the 10k $\Omega$  trimpot near IC5 until the last (extreme righthand) LED of the signal level display just begins to light. This setting ensures that the tuner circuits are working at modest signal level and are producing a minimum level of distortion.


This done, disconnect the AGC shorting link, LK2, and re-connect the digital tuner readout to the local oscillator. The only remaining adjustment to be made is to the 9kHz whistle filter, but first we must be able to receive stations and for

give more signal output. The attenuator of the tuner should be adjusted so that the LED signal strength display does not overrange for any station and left on this setting.

In use the tuner should be tuned exactly to the station frequency. Any deviation from the frequency will increase distortion and decrease the bandwidth. The artwork that we have produced for the top panel of the tuner lists the station frequencies for major cities of Australia. Note that a complete stations listing is unnecessary since the unlisted towns only have a few stations that are easily remembered.

If you are unable to remember the station frequency, the station may be accurately tuned by first switching to the narrow position and tuning for a peak on the signal strength indicator. The exact station frequency is then determined by noting that the displayed digits should all add up to 9 (some digits add up to 18, but adding again gives 9).

To adjust the 9kHz whistle filter, set the wide/narrow switch to the wide position and tune to a station which has a 9kHz whistle. During daylight hours, whistles

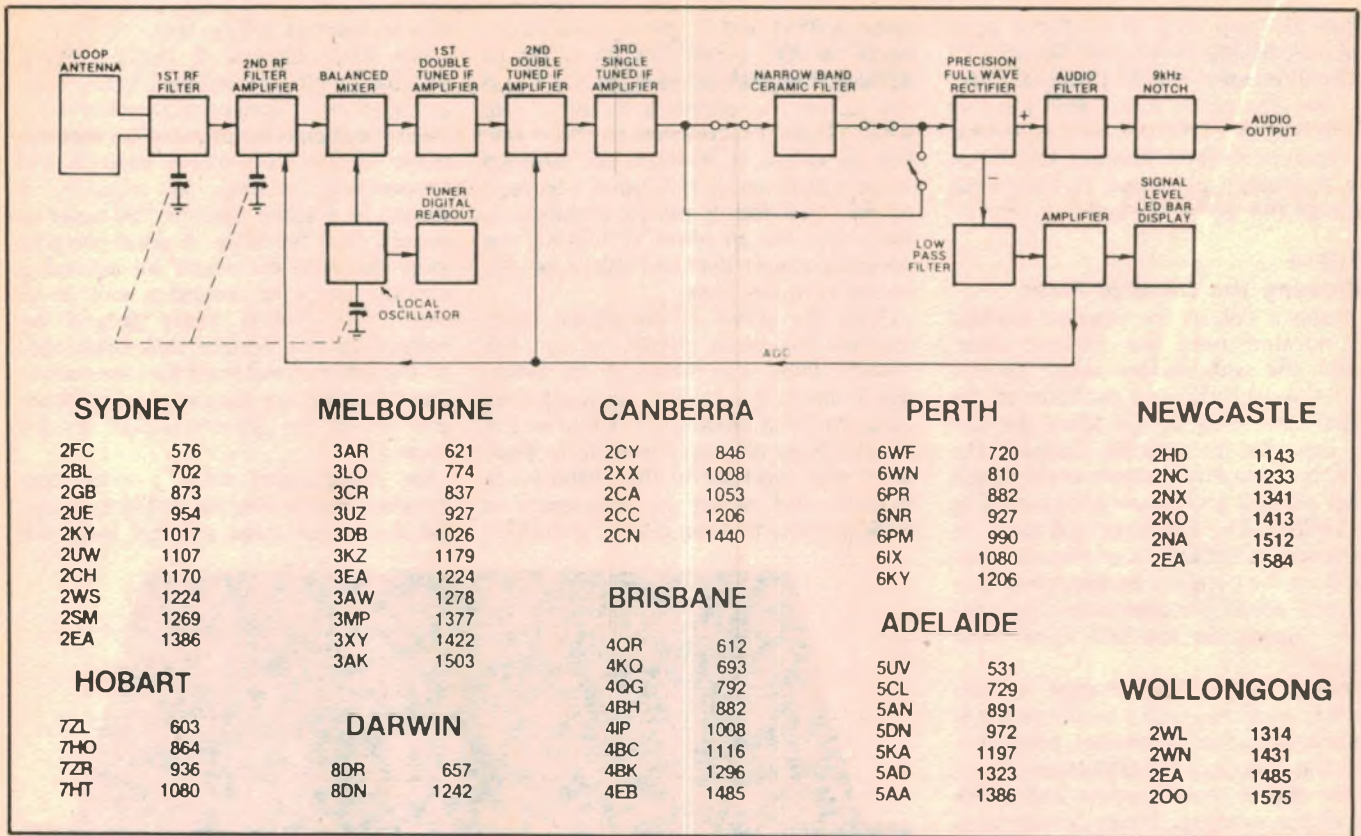

This top panel artwork has been reduced by 1.5:1 so that it will fit on the page.

may not be evident, but at night they will be quite noticeable. Rotate the ferrite cup of the 8010 coil for the best null.

The audio output level from the tuner should be sufficient to give full output from typical stereo amplifiers. If the level appears excessive it can be decreased by increasing the value of the 10kΩ resistor at the output of the whistle filter. The 100pF capacitor coupling the ceramic filter, C3, can be altered to provide a narrower response when the narrow/wide switch is in the narrow position. A 27pF capacitor will give a 2kHz bandwidth, while a 68pF capacitor will give a 3.5kHz bandwidth.

Some readers may also wish to experiment with a wider bandwidth than that specified. To widen the bandwidth, the 27pF top coupling capacitors, C1 and C2, can be increased to 33pF. While R5 should be 7.5kΩ, R6 6.8kΩ and R7 75kΩ. These changes give the audio filter a roll off at 15kHz and the bandwidth of the tuner is extended to a similar degree.

Be warned, however, that increasing the bandwidth increases the noise and the likelihood of "monkey chatter" becoming a problem at night. Monkey chatter is a form of interference caused when the sidebands of adjacent station fall within the passband of the tuned station. We consider the values originally specified to be the best compromise bet-


ween noise and bandwidth.

Of course all the foregoing article has rested on one very important assumption and that is, when you turned it on everything worked! What if it doesn't? Shudder, shudder! To help you face that possibility we have prepared a troubleshooting procedure which will pin-

point most of the likely faults.

One benefit of a superhet tuner such as this is that any fault is likely to be localised in just one stage and thus be easier to track down than a fault in a direct-coupled audio amplifier. So while faults are possible they should be fairly easy to correct.

## Getting started in electronics?

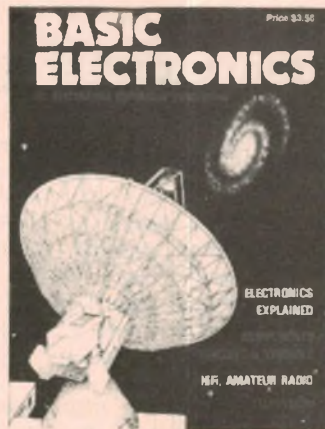

**BASIC ELECTRONICS** is almost certainly the most widely used manual on electronic fundamentals in Australia. It is used by radio clubs, in secondary schools and colleges, and in WIA youth radio clubs. Begins with the electron, introduces and explains components and circuit concepts, and progresses through radio, audio techniques, servicing, test instruments, etc. If you've always wanted to become involved in electronics, but have been scared off by the mysteries involved, let Basic Electronics explain them to you.


Available from "Electronics Australia", 57 Regent St, Chippendale, NSW. PRICE \$3.50 each OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2008. **PRICE \$4.40 each.**



# Circuit & Design Ideas

Interesting circuit ideas from readers and technical literature. While this material has been checked as far as possible for feasibility, the circuits have not been built and tested by us. As a consequence, we cannot accept responsibility, enter into correspondence or provide constructional details.

## Suppressed zero car voltmeter

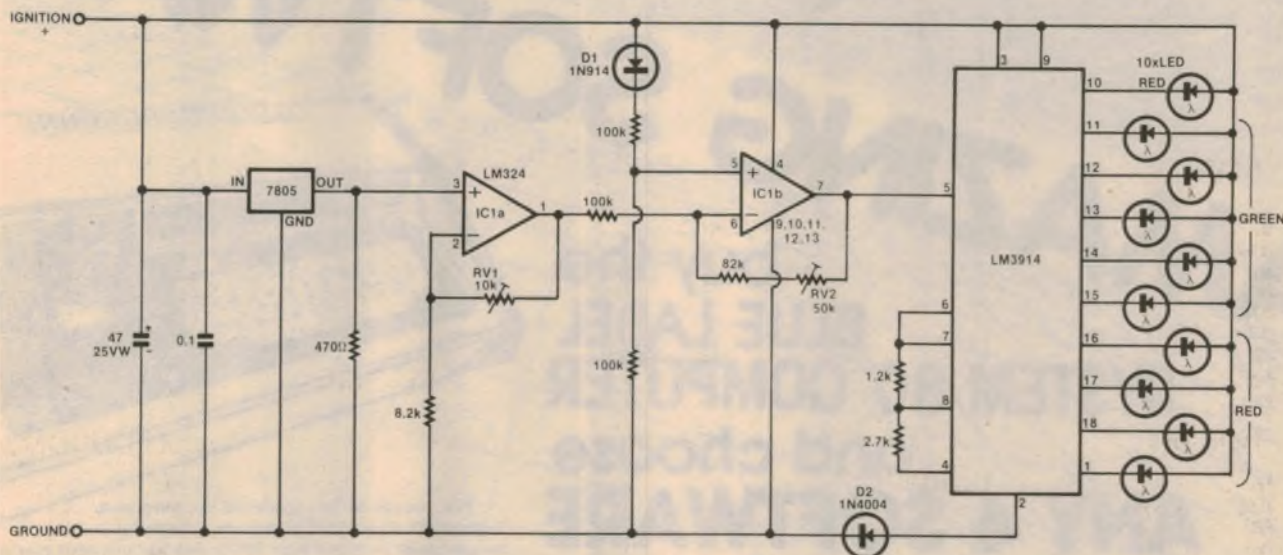

A centre zero ammeter is probably the most common way of monitoring a car battery, but that means running heavy wires from the engine bay into the car. The battery voltage, however, can be measured from under the dash with only light wiring being required. Battery terminal voltage is an indication of the current flowing into or out of it. The internal resistance causes the terminal voltage to drop below the open circuit voltage under discharge conditions and during charging the terminal voltage rises above the open circuit voltage.

Therefore a voltmeter would do the job without the need for heavy wiring. For greater resolution an expanded scale can be used to eliminate the measurement of insignificant voltage levels, in this case less than 10V.

The 7805 regulator IC1a and associated components form a nominal 8V reference which is adjusted by RV1 for offset calibration. IC1b subtracts the reference from the input and RV2 provides range calibration. D1 and D2 overcome the problems associated with operating op-amps near their supply rails.

Output from IC1b is fed to the input (pin 5) of an LM3914, a bar graph display driver. This, in turn, drives the 10 LEDs which make up the display. RV1 is adjusted to cause the first LED to come on for 10 volts input and RV2 is adjusted so that LED 10 is illuminated for an input of

14.5 volts.

Now we have an expanded scale bar graph voltmeter with a 10 LED display, the first LED coming on at 10V and each successive LED lighting in 0.5V steps up to 14.5V for the tenth LED to be illuminated.

Ten LED arrays are available but they are all the same colour and this makes

the display slow to interpret. For ease of reading, make LED 1 to LED 4 red, LED 5 to LED 9 green and LED 10 red. This means the first green LED comes on at 12V giving an easily recognised reference point on the display and the single red LED identifies full scale.


M. Gilbert,  
Castle Hill, NSW.

## Stripper modification for wire wrapping

Wire-wrapping is a quick and simple method of interconnecting electronic components. Many hobbyists use a hand-operated wire wrap-unwrap-stripping tool from Tandy. There are two minor irritations in using the stripping part of the tool. The first is that it is hard to hold. The second is stripping the wire to the correct length.

If the stripped end of the wire is too short there is the risk of not making a good joint. If the stripped part is too long, the wire leaves the groove in the tool and can tangle itself around the bit and break. This also results in a poor joint.

The stripping portion of the tool can be removed from the handle and permanently mounted in a piece of timber or plastic as shown. Stripping the wire to the correct length is now easy. Simply place the end of the wire in the

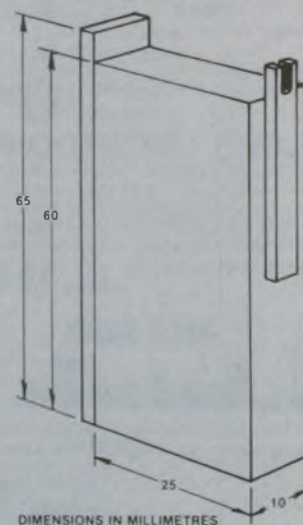

jig up to the back plate, press down on it with the forefinger and pull.

J. Broekstra,  
Indooroopilly, Qld.

# AMAZING SOFTWARE

buy the  
**BLUE LABEL  
 SYSTEM 80 COMPUTER**  
 and choose  
**ANY 4 SOFTWARE  
 SHOWN FOR \$1 EA!**



Yes, you can believe your eyes! Buy the superb System 80 Blue Label Computer, already at a bargain price (reduced from \$750) and you can take your pick of ANY 4 of the software packages below for the incredible price of just \$1.00 each as well as making an incredible saving!

But hurry - this offer is strictly limited, and we reserve the right to supply alternative software if any of your selections are out of stock. And that's pretty likely, so you'd better be quick. It's an offer you cannot afford to miss!

Cat X-4005

~~WAS \$750~~

**NOW \$699**

Choose your selections from the items on this page. Remember, you can have any four for just \$1.00 each - you can also order by mail. Why not order your other programs at the same time!




## SPACE INVADERS

The ever popular arcade game that became a cult. Can you shoot down the aliens before they destroy you & Earth. Fast moving, good graphics (written in machine language).  
 Cassette based Req 16K Cat X-3698  
 normally **\$11.95**

## ALPHABET COUNTDOWN

A great teaching & learning aid. Sets of words taken at random from a large group, must be placed in alphabetical order, in the shortest possible time. It has 3 levels of difficulty. Rhyme Time displays a series of unfinished rhymes, & the player has to type in the missing word from the clues given in rhyme itself.  
 Cat X-3698  
 normally **\$11.95**

## BETA BLITZ



Put yourself in the pilot's seat as you approach the city on your high speed bomb run. Your mission to destroy the enemy's ground installations. But beware of retaliation!  
 Cat X-3683  
 normally **\$14.95**

## DEPTH CHARGE

The latest version of the arcade favourite. Your mission is to destroy the enemy submarine pack. Good graphics and includes sound.  
 Cassette based 16K Cat X-3686  
 normally **\$14.95**



## HANGMAN/ CONCENTRATION

2 games for the price of 1. Hangman - a computer version of the well known word guessing game.

The words can be chosen by either the program or a second player. Concentration - Two players or teams have to match prizes from behind numbers on the screen, then guess the mystery word.  
 Req 16K Cat X-3696  
 normally **\$11.95**



## Speed Reading

A set of programs on two cassettes to help readers of all ages improve their reading skills. 4 programs - 4 levels, and variable speeds.  
 Req 16K Cat X-3692  
 normally **\$24.50**

## TREK

Based on the ever popular TV series Star Trek this game utilizes good graphics & provides continuous 'status' reports. Your aim is to destroy the enemy & save the galaxy.  
 Cassette based Cat X-3644  
 normally **\$11.95**

## SCURVE INVADERS

Combines basic maths drill with the ever popular Space Invaders game - maths has never been such fun. Before being able to shoot, the player has to feed in the 'correct data' to the spaceship computer. 3 levels.  
 Cassette based Cat X-3694  
 normally **\$11.95**

## Death Trap

A fast moving real-time graphics game you have to control the motion of a constantly moving point on the video screen & avoid randomly appearing 'mines' until an 'escape window' appears.  
 Req 16K Cat X-3688  
 normally **\$11.95**



## GALACTIC EMPIRE

Have you ever wanted to dominate the world or even the universe? You little dictator - this is for you. In case you're not as good as you thought - a detailed manual is supplied.  
 Cassette based Req 16K Cat X-3679  
 normally **\$19.50**

## GALACTIC TRADER

You think you can drive a good bargain! Try the galaxy as your market! There are 10 levels of difficulty to keep you happy.  
 Req 16K Cat X-3678  
 normally **\$19.50**

## GALACTIC REVOLUTION


You envy the diplomats in this galaxy? Try your 'social' skills on this game. Will you lead the revolution (or suppress it)?  
 Cassette based Req 16K Cat X-3677  
 normally **\$19.50**

Poker Pete	Cat X-3664	normally \$12.50
Simutek Games Package 1	Cat X-3684	\$14.50
3D Tic-Tac-Toe	Cat X-3671	\$14.50
Supermaze	Cat X-3672	\$14.50
Musical Composer	Cat X-3640	\$19.50
Morloc's Tower	Cat X-3594	\$19.50
Datstones of Ryn	Cat X-3595	\$19.50
<b>OTHER GREAT PACKAGES TO CHOOSE FROM</b>		

# OFFER

Unleash the full potential of your SYSTEM 80 with this

## EXPANSION UNIT

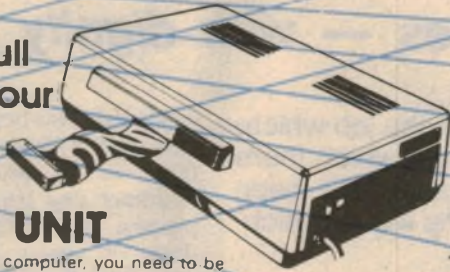


To get the most from your computer, you need to be able to add on all sorts of peripherals; disk drives, printers, etc. This unit gives interface ability and also a further 16K of memory with room for further 16K (giving a total of 48K).

### FEATURES:

- 16K of expansion RAM, room for 16K more.
- A floppy disk controller for controlling up to 4 disk drives giving up to 400K bytes.
- A Centronics-type parallel printer port.
- Optional S-100 interface with 2 vacant slots.
- An optional RS-232C serial communications port for modems & acoustic couplers. May also drive a teleprinter.

Cat X-4020

## Hi-Res Lo-Price! The Dick Smith HIGH RES GREEN SCREEN



Anti-glare screen with its jitter and ghost free image, makes viewing much easier and sharper (allows 80 characters with 24 lines). A MUST for serious computer hobbyists or professionals. Cat X-1200

Suits most computers - why pay more?

~~\$349~~

SAVE \$70

AMAZING VALUE

**\$279**

other monitors from \$169

## The Dick Smith DAISY WHEEL PRINTER

Don't be fooled by similar models that are much slower. Delivers ultra-sharp, clean copy up to 40cm wide! Uses standard paper, letterhead etc. Uses economical Diablo daisywheels and ribbon cartridges - so a wide range of fonts is available. Prints at three times the speed of a golf ball typewriter and is suitable for most currently available microcomputers. Cat X-3265



SAVE \$200  
SPECIAL PRICE  
~~\$1990~~

**\$1790**

SEE PAGE 98 FOR FULL ADDRESS

**NEW**

Cheapest per byte!


## THE DICK SMITH SYSTEM 80 DISK DRIVE

New design for greater reliability!

Fast reliable disk drive that not only gives your System 80 dramatically increased speed but also increases effective memory. Your computer can handle much more involved programs, and much faster! Drive includes inbuilt power supply. Already configured for drive 0 or 1 - no messy fiddling!

Drive 0 - Cat X-4060

Drive 1 - Cat X-4061

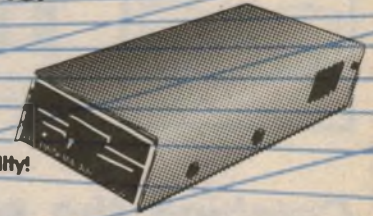

ONLY  
**\$495**

**NEW**

Same price, more features Printer

We sold hundreds of the previous model - and it was only for 204mm paper! This model is the same price - but it takes a much wider paper - 240mm! If you don't need word processor quality - you can save a fortune!

Cat X-3250



**\$74 LESS  
THAN  
PREVIOUS  
MODEL!**

NOW ONLY  
**\$425**

FAMOUS  
SEIKOSHA  
QUALITY

Takes 240mm  
paper!

ONLY  
**\$495**

**NEW**


High Res Graphics  
Printer -  
Super Quality

Our very newest model - with built-in 2K buffer allowing storage of data to be printed - less down time on the computer. Numerous printing types. Superb (you've got to see to believe) high resolution graphics. You'll save hundreds of dollars on this printer! Accepts both standard stationery AND fan-form (tractor feed) paper. Cat X-3260

ALMOST WORD  
PROCESSOR QUALITY!

NOW  
ONLY


**\$970**

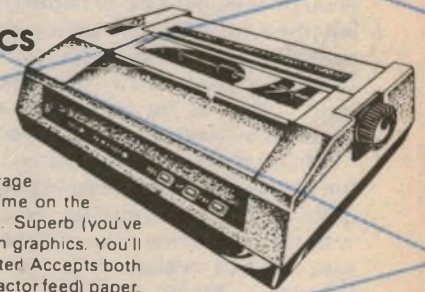

YOU REAP THE  
BENEFIT!

**DICK SMITH  
Electronics**





# The Serviceman

## Catching the set that bounces — with dignity

One of the more frustrating aspects of servicing is the job which, superficially, appears to have been fixed, but about which there are some questions still unanswered. Has the fault really been found, or is there a more subtle defect lurking in the works which, sooner or later, will cause the set to bounce?

One set I had recently came into this category, and caused me quite a lot of worry before I was finally convinced that I had really fixed it. It was a Kriesler 59-4 colour set, one of the smaller variety, and the owner obliged by bringing it into the shop.

His story was somewhat garbled, particularly as to the exact sequence of events; a matter of some importance as it transpired. However, he started out by saying that the set had no picture but a bright line across the centre of the screen, and that seemed straightforward enough; a simple case of frame collapse. But then he went on to say that (apparently) before this happened the set had gone dead on two or three occasions, but that he had been able to restore it by switching it off and on again.

I pulled the back off the set and swung the chassis out into a working position. A quick run over the vertical output stages with the multimeter revealed the significant fact that neither of the two output transistors, TR656 and TR657, had any voltage applied to them. Nor was the reason hard to find; a 33Ω safety resistor, R651, between these transistors and the 35V rail supplying them, was burnt out.

### AN EASY FIX?

The obvious thing to do was to replace this and see what happened, though I did not imagine for one moment that the cure was going to be as easy as that. If the resistor had cooked there had to be a reason and the best that I could hope for was that the replacement would last long enough for me to get some inkling as to the real fault.

Imagine my surprise, therefore, when I switched the set on and everything came up roses; normal picture, normal sound, good colour, etc. More importantly, there wasn't the slightest clue as to what

had caused any of the original symptoms.

I pushed the set into a corner of the bench and let it run while I went on with other jobs, still expecting something to happen. But the hours went by and nothing did. Eventually, late in the afternoon, the owner called back to see how things were going.

I explained to him, as simply as I could, what I had found and that I felt quite strongly that this was not the real fault, only a symptom of it. Also, that I had found nothing to explain the total failure of the set which he had mentioned. What the set really needed was to be run on the bench, for several days if necessary, until the real fault showed itself.

But he wasn't keen on that. The set was obviously working and he was keen to get it back home. He was sure it would be all right. So, I warned him again and added that I would make some charge concession if he had to bring it back. And on that note he paid the account and went on his way. (But I knew he'd be back.)

In fact, nothing happened for about a



*"You realise, of course, that there's a slight additional charge for these fringe-area calls?"*

week and I was beginning to think it had been one of those freak cures for which there is no explanation. Then the customer was back in the shop, complaining that the "so-and-so" set had done it again. More precisely, it transpired that it had first failed completely and remained in that condition for some time, but still switched on. Then it had partially recovered, but with no vertical scan.

I lost no time in getting the back off and checking on the 33Ω safety resistor. I wasn't really surprised when I found that it had burnt up again but the real surprise came when I switched the set on and found that it was now completely dead, which did not tally with the customer's description of its behaviour the last time he used it.

At this point I tossed up as to whether to replace the safety resistor, or keep looking for what was, apparently, a second fault. I decided to replace the resistor first, thinking that it might have some bearing on the total failure, or that the search might be easier with the vertical circuitry restored.

### BACK TO NORMAL

So I replaced the resistor and — yes you guessed it — the set returned to normal. By now I was completely confused. Did I have two faults, or only one with very strange symptoms. I put the set to one side, still running, and took another look at the circuit in the hope that I could work out what was going on.

I didn't have much luck. I tried to formulate a theory about a failure in the vertical circuit which was overloading the 35V rail and shutting down the power supply, but this just didn't fit the symptoms. In any case, once the 33Ω resistor had burnt up there would no longer be a load to shut down the power supply.

I gave up and went on with my other jobs.

The set continued to run for the next couple of days, with nary a flicker. Then suddenly it was completely dead. I was on to it like a flash, armed with multimeter and CRO, and anxious to see

what was happening to the 33Ω safety resistor. One glance was enough; it was cooking merrily, but I resisted the temptation to switch the set off. The less the circuit was disturbed at this stage the better!

I did check the 35V rail supplying this resistor, and found that it was spot on, in spite of the extra load, whatever it was. This much confirmed I turned my attention to the line output stage; the next most likely place to find the cause of a total failure.

Armed with an appropriate probe on the CRO I went straight to the line output transistor (TR710) and checked the waveform on its collector. There was none. Nor was there anything on its base, which is fed from the secondary of a driver transformer (T707). In the past, I have known this transformer to give trouble due to dry joints where it is fitted to the board, but a check on this seemed to rule that one out.

Next stop was the base of the driver transistor (TR707) and here we did have a normal waveform and, just to make sure, I checked the base of the previous stage (TR701) and again found a normal pulse waveform. So back to the line driver transistor where the pulses seemed to vanish after reaching the base.

I put the CRO probe aside and reached for the multimeter. There should have been about 30V on the collector of this transistor but, in fact, there was nothing. I traced the circuit back through the primary winding of the driver transformer and found that there was no voltage here either.

Fortunately, having traced things this far, the reason was fairly obvious. This stage is also supplied from the 35V rail and also via a 33Ω safety resistor (R706), and it was also burnt up. Why? I put my money on the driver transistor being short circuit and, for once, I was right; it was dead short between collector and emitter.

A new transistor and two new 33Ω safety resistors restored the set to normal operation. Which was all very gratifying, except that it left a lot of unanswered questions. Just what had failed first and to what extent was one fault responsible for the other, if at all?

Armed with the bare facts of what I had found I took another look at the circuit. It was the failure of the line output stage which provided the first clue. Auxiliary windings on the line output transformer provide several other voltage rails, including a 12V rail which, among other things, supplies the vertical oscillator stage.

So, when the line output stage failed, ie, when the set went completely dead, the vertical oscillator stage failed. And the vertical output stage is such that, in the absence of any drive, it draws excessive current. Hence the failure of the

33Ω safety resistor, R651, and the fact that, when the line output stage came good, the frame circuit had failed.

But why had the line output circuit failed and then come good again? There seems little doubt that the faulty line drive transistor (TR707) had been intermittent but why didn't it take out the other 33Ω safety resistor (R706) the first time it failed; why had this not failed completely until it had gone through several such cycles, including a couple on my bench?

One possibility is that the transistor, initially developed a high leakage rather than a dead short; enough to stop the stage working but not enough to take out the safety resistor. Then, on my bench, it broke down completely and finished the job. Well, it's possible I suppose, but not very likely.

Another suggestion is that when the transistor failed the first time, it cooked its own safety resistor (R706) to the point where this became intermittent. From then on the subsequent failures may all have been due to the resistor rather than the transistor until, on the bench, the transistor failed a second time and finished the job.

The truth is, there is really no way of knowing and it's all rather academic I suppose. At least I had been able to establish the association between the line failure and the frame failure, and that may well be a valuable lesson to remember.

## HORIZONTAL OVERSCAN

And that's the end of the story? Not quite. With the major fault cleared I started to give the set a routine check for height, width, linearity, etc, and picked one of the morning test patterns as an aid. Whereupon it became immediately evident that the set was suffering from horizontal overscan. Not enough to be immediately evident on a program, but obvious on the test pattern.

I immediately recalled that the earlier model Krieslers, the 59-1 and 59-2 series, were prone to a similar fault, and that it was due to the failure of a transistor in the line output system, forming part of the linearity and correction circuitry. In fact, it can cause two width problems; if the transistor goes short circuit it can reduce the scan by 25mm or more on either side of the screen. In this case the error is so obvious that the owner invariably calls for help immediately.

But if it goes open circuit it can cause a similar amount of overscan, which is less obvious and may not be noticed at all by some people. Suspecting that this was what had happened to this set I compared the circuit with the older 59-1 circuit and concluded that they were sufficiently similar to support my theory.

This led me to TR694, a small power transistor, type BD236. I pulled it out,

# COLOUR TV CHANGE OVER MODULES AND SPARES

<b>HMV EMI C211/212</b>	
Power supply	\$38 change over
Horizontal	\$45 change over
Vertical	\$22 change over
<b>HMV EMI C221</b>	
Power supply	\$32 change over
Horizontal	\$42 change over
Vertical	\$24 change over
<b>PYE T29/T30</b>	
Scan & Signals	\$53 change over
Philips & Kries Early	
Power supplies	\$53 change over
P/Supply controls	\$18 change over
Sound	\$15 change over
Other models available	
<b>RANK</b>	
All deflection boards	\$48 change over
<b>SHARP</b>	
Horizontal	\$24 change over
<b>26" BLAUPUNKT</b>	
Early version	\$28 change over
P/Supply & mains unit	\$28 change over
Remote receiver	\$48 change over
Remote H/Piece	\$35 change over
Complete chassis	\$80 change over
<b>TYNE</b>	
Convergence	\$38 change over
EHT + P/Supply	\$48 change over
<b>NATIONAL CP2000, TC86</b>	
Power supply	\$30 change over
Vertical	\$30 change over
Video	\$48 change over
<b>SONY K1830</b>	
Board A	\$48 change over
Board D	\$36 change over
Board E	\$48 change over
Board F	\$48 change over
<b>HANIMEX HCT26-700</b>	
Line scan	\$53 change over
Field scan	\$48 change over
Decoder	\$48 change over
<b>GEC 2213 &amp; 2621 &amp; 2612</b>	
PC706 Complete	\$53 change over
PC737	\$53 change over
PC687	\$48 change over
PC470	\$38 change over
PC656	\$38 change over
PC475	\$53 change over
<b>LUXOR</b>	
All P/Supplies	\$30 change over

### NEW PARTS

EHT transformers to suit Blaupunkt-Luxor-Nordmende-GEC 22" — All \$32 each  
Philips & Decca — \$36 each  
HMVC211/212 — \$30 HMVC221 — \$24

### LARGE RANGE OF OTHERS AVAILABLE.

New remote control handpieces to suit Luxor-Blaupunkt-Nordmende-GEC-ITT-Greatz-Saba-Loewe-etc., all with 2 year warranty \$68 each  
When ordering parts please specify clearly model and make

Large range of spares in stock new & second hand

SPECIAL triplers Philips type \$10 ea.

Send cheque or money order to:

**T.T.V.S.,**

159 Queens Parade,  
Clifton Hill, Vic. 3068

Ph: (03) 489 1168

Minimum Order \$35. PIP \$3  
Orders over \$100 Post Free.

## THE SERVICEMAN — Continued

checked it, and sure enough it was open circuit. Well, I suppose you must win sometimes.

And that really was the end of the story. Except that I couldn't really charge for all the time I had spent on the job, but that's the luck of the game. I could only hope that the next set would be in and out in a few minutes.

### MITSUBISHI REVISITED

My next story is a follow-up of one I told in the January 1982 notes concerning an AWA set, of the Mitsubishi "K" series, which had developed a funny (peculiar) fault in the sync separator stage. One of the points about the story was that I was unable to obtain a replacement for the sync separator transistor, a 2SA628, which was faulty, nor could I find a substitute type which would work in what was, apparently, a quite critical circuit.

I finished up "pinching" a 2SA628 from another part of the circuit — a switching transistor, Q433, in the vertical deflection chain — where it seemed that a BC327 would work quite happily. And, while I don't like having to pull tricks like this, there was really little alternative if I was to get the set back to the customer without serious delay. To make matters worse, he had already been given a raw deal by a previous serviceman.

Anyway, the set went back to the customer and all went well until a few weeks ago, almost 12 months after the original job. Then his wife was on the phone with a tale of woe about the set having failed again. On enquiring as to the nature of the fault I was given a rather garbled story which, as nearly as I could interpret, meant a partial frame collapse.

That suggestion rocked me a little, remembering that it was from the vertical circuit that I had swiped the vital 2SA628. Was the BC327 that I had substituted incapable of doing this job on a long term basis, perhaps due to peak voltages or something similar which I had failed to take into account?

I was still pondering on such possibilities when I arrived at the customer's home and checked the symptoms for myself. Sure enough, the lady's description turned out to be reasonably accurate; the vertical scan had dropped to about 100mm near the centre of the screen.

But that was not all. She went on to explain that the trouble varied. Typically, when first switched on, it would run with reduced scan for anything up to two hours, then it could come good and might stay that way for another two hours or more, but would usually col-

lapse again, eventually. All of which didn't help much and, on top of my worry about the BC327, set me drawing heavily on my worry bank.

The only thing I was sure at this time was that it was no job for the lounge room. Fortunately, I had a spare set on hand which I could loan them, so it was arranged that I fetch the loan set and then take the Mitsubishi back to the workshop.

Back at the shop I switched the set on again and it came up exactly as it had in the house. Well, that was something, anyway. Hoping it would stay that way, as it was supposed to, I reached for the multimeter and approached the vertical deflection circuit. This consists of no less than eight transistors; two in the oscillator circuit (Q431-432), the vertical switch which I had mucked about with (Q433), a vertical amplifier (Q434), vertical driver (Q435), an inverter (Q436), and two output stages (Q491-492).

My first thought was that partial collapse in this circuit might be due to one of the output transistors dropping its bundle, either partially or completely, but all the voltages around these checked out almost exactly with the circuit. I might have known it was not going to be as easy as that.

### OUT WITH THE CRO

I stoked up the CRO and prepared to do battle at a more scientific level. Still worried about the BC327, I made my first check at the base of this transistor, which is shown as check point 23, and for which a waveform is given. This waveform shows a negative going pulse of about 9V p-p, and this is exactly what came up on the CRO.

The next check point is No. 24, at the base of the following transistor, the vertical amplifier, Q434. The waveform shown for this point is a sawtooth of 3.8V p-p, and this was where things were obviously going wrong. The best that the CRO could come up with was about 2V. (By now I was feeling really worried about that BC327.)

I went back to the multimeter and began checking voltages around the BC327. There was about 19V on the base, which checked with the circuit, and 11.6 on the emitter, which was also correct. But all was not well with the collector. This was supposed to have 0.54V on it, but was actually reading about 10V.

No prizes for guessing what I did next. I whipped out the BC327 and put it on the tester, fully expecting to find it broken down or leaky. But no; it read normal in all respects. Nevertheless, I fished out a new one and fitted it, just in case. But all

this did was to put things back exactly as they were before. Well, at least it seemed that I had cleared the BC327, and that was a relief.

At that point fate took a hand. I was called away to another job which I could not conveniently ignore at that time, so I decided to leave the set running and see if it would come good as the customer had predicted. Sure enough, when I returned a couple of hours later it was back to an almost full scan; just slightly short at the bottom of the screen.

The CRO was still connected to check point 24, so I turned up the brightness and found that the waveform was now approaching 4V p-p, as the circuit said it should. Not wishing to risk disturbing the situation by probing things with the meter probes, I reached for the freezer spray and began systematically freezing each component in the vertical circuit, starting at the vertical switch and vertical amplifier stages, and spreading out as I drew blanks.

### OVERSCAN

The trouble was I kept on drawing blanks until there was virtually nothing left to try. I was still contemplating this situation when the picture suddenly went into an overscan condition, and I remembered that I had advanced the scan control previously, to note what effect it had. I assumed that what I was now seeing was proper operation for the first time.

But it didn't stay that way for long. It dropped back to the near normal scan for a few minutes, then went back to the original fault condition. And there it stayed. Once again I decided to take a break, mainly because I suddenly realised that it was past lunch time and I was hungry. (Yes, these jobs get you like that sometimes.)

Naturally, I didn't think of much else over lunch. In fact, I took the circuit to lunch with me. (All right, the circuit didn't need lunch, but you know what I mean.) Looking at the circuit again I tried to visualise where the spurious 10V on the BC327 collector could be coming from, now that the transistor itself had been cleared.

The base of the following stage, the vertical amplifier, is biased to about 9V from a separate rail but this point is isolated from the BC327 collector by a diode (D436). Could this diode be leaky? If it was it might explain the spurious voltage.

I gulped down the remainder of my caviare and champagne as quickly as was prudent (Mrs Serviceman's sandwiches and a tin of TAB actually) and hurried back to the bench. I lifted one end of the diode and checked it, but no joy; it was working exactly as it was

*Continued on p133*

AC or dc voltage displayed in dBm referenced to 600 ohms, or relative dB.

Measures frequencies from 12Hz to 200kHz, fully auto-ranging, with 1-second response time and 0.01 Hz resolution to 200Hz.

Selectable visual (⇄) and audible ())) indicators for high-speed continuity checking, 50μS response time.

Relative reference (offset) feature works with all functions — including frequency and dB—to indicate ± deviations from stored inputs.

# FLUKE HANDHELD DMM COMBINES 0.04% ACCURACY, 10μV RESOLUTION, TRUE RMS AC, DIRECT dB and FREQUENCY


## 8060A

This remarkable state of the art DMM combines the accuracy and resolution of larger, more expensive instruments with the convenience of a hand-held instrument. Flukes own LSI/microcomputer design provides:

- Wideband true RMS AC measurements to 100kHz
- Frequency measurement to 200kHz
- dBm and relative dB
- 10μV sensitivity
- Direct resistance measurement to 300Meg
- Relative reference on any range or function
- Microcomputer-based self diagnostics

## 8062A

Provides continuity and relative reference functions as 8060A also true rms to 30kHz

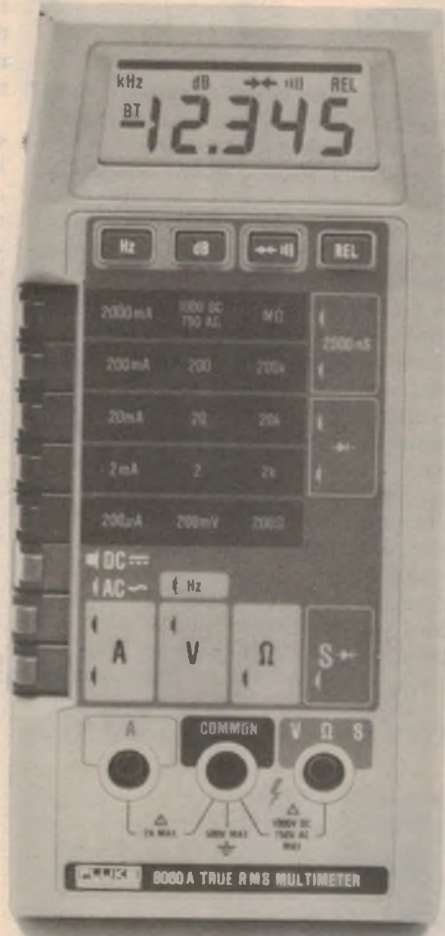

## CHECK THE COMPLETE FLUKE 8020B SERIES OF DMMs

### 8020B

- 0.1% basic accuracy, 3½ digit
- Improved version of the most popular DMM ever made!
- Eight functions including conductance and diode test
- Now with high speed beeper

### 8021B & 8022B

- 0.25% Accuracy, 3½ digits
- Extensive overload protection
- AC and DC Voltage and Current, Resistance and Diode Test
- High Speed audible continuity beeper (8021B Only)
- 8022B is Fluke's lowest price DMM

### 8024B

- 11 functions including temperature with K-type thermocouples
- Peak hold on voltage and current ranges
- Logic detection and continuity
- Audible and visible indicators
- 0.1% basic accuracy, 3½ digit

### Selection Guide

	DC Voltage	AC Voltage	DC Current	AC Current	Resistance	Diode Test	Conductance	Continuity	Logic Level	Temperature	Peak Hold	DC Accuracy	
8022B	•	•	•	•	•	•	•	•	•	•	•	0.25%	\$173
8021B	•	•	•	•	•	•	•	•	•	•	•	0.25%	\$185
8020B	•	•	•	•	•	•	•	•	•	•	•	0.1%	\$234
8024B	•	•	•	•	•	•	•	•	•	•	•	0.1%	\$296



All prices are plus sales tax if applicable and subject to change without notice.

8060A	• 100 kHz	• 200 kHz	• 0.04%	\$432
8062A	• 30 kHz	•	• 0.05%	\$346

## 8050A

A bench portable providing 4½ digits with a basic accuracy of 0.03%. True rms measurements to 50kHz, 108dB range and 16 selectable reference impedances from 8 to 1200ohm.

\$457




## ELMEASCO

Instruments Pty. Ltd.

P.O. Box 30, Concord  
N.S.W. 2137  
13-15 McDonald Street,  
Mortlake, N.S.W.  
Telephone (02) 736 2888  
Telex 25887

P.O. Box 107, Mt Waverley  
Victoria 3149  
21-23 Anthony Drive,  
Mt. Waverley, Victoria  
Telephone (03) 233 4044  
Telex 36206

Adelaide: (08) 271 1839  
Brisbane: (07) 369 8688  
Perth: (09) 398 3362



N.S.W. Ames Agency 699 4524 • George Brown 519 5855 • Davred 29 6601 • DGE Systems (049) 69 1625 • Radio Despatch 211 0191 • Vimcom (042) 28 4400 VICTORIA Radio Parts 329 7888 • Browntronic 419 3986 • G.B. Telespares 328 4301 • Elanco 428 4345 • Ellistronic 602 3282 QUEENSLAND L.E. Boughen 36 1277 • Colourview Wholesale 275 3188 • Audiotronics 44 7566 • Electronic Shop (075) 32 3632 • Nortek (077) 79 8600 • W.G. Watson (079) 27 1099 S.A. Protronics 212 3111 • Trio Electrix 51 6718 W.A. Atkins Carlyle 321 0101 • Hincro Eng 381 4477 • Brookesades 276 8888 • Protronics 362 1044 A.C.T. Actice (062) 80 6576 N.T. Thew & McCann (089) 84 4999 T.A.S. G.H.E. Electronics 31 6533 & 34 2233

## MAIL COUPON FOR FREE GUIDE

Please send me details of Fluke DMMs  
 8060/62 & 8050  8020B Series

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

P/CODE \_\_\_\_\_

TELEPHONE \_\_\_\_\_

# Remote infrared TV sound control Part two

As noted in last month's article on the remote infrared TV sound control, some TV sets have a DC volume control. This article shows how to modify the circuit to work with these later model sets and, as it turns out, less components are needed.

by LEO SIMPSON

Featured with this article is the 5.5MHz FM detector volume control and audio output circuit of a Toshiba TV receiver which may be regarded as a typical example of a set with a DC volume control. The volume control works by varying the DC voltage at one of the IC pins. As such, the volume control is merely wired as a variable resistor and so only two wires are needed.

In the Toshiba set under discussion, the sound volume is at a minimum when the voltage across the volume control is at a maximum and vice versa. In order to make the remote volume control work with this set, there are two approaches, as noted briefly last month. First, the circuit as presented last month can be wired in series with the audio output from the IC. In this case, C613 would have to be removed and the two shielded cables from the main receiver board connected in place of the capacitor.

In most TV sets with a DC volume control this approach would not be easy. An

alternative and easier approach is to reconfigure the receiver circuitry around IC1 as a variable switched resistor which can be connected directly across the volume control of the TV set. Before we detail how this is done, let us recap briefly on the operation of the circuit presented last month.

In the original circuit on page 42 of the January 1983 issue, the 4051 is used as a passive voltage divider consisting of a 100kΩ resistor in series with the audio signal and one of six shunt resistors or a transistor (for full attenuation). The 4051 is used to select either none (for maximum output) or one of the six shunt resistors or the transistor. The 4051 is controlled by the 4029 binary up-down counter.

As it stands then, the 4029 is caused to count up to increase the volume and down to decrease the volume. Thus, the minimum count turns on the transistor, Q5, to shunt all the audio signal to the 0V line and silence the TV sound. IC6 is


used to buffer the audio output.

Since the DC volume control circuit is a two-wire control, the remote control circuitry cannot be used in the same way. It must be used as a variable DC shunt which can be connected in parallel with the existing volume control. This means that IC6 can be dispensed with, as can the associated input and output coupling capacitors.


Now look at the amended circuit which shows only that part pertaining to IC1. The remainder of the circuit is unchanged. For minimum DC voltage at the input (and thus maximum sound volume from the TV set), Q5 is turned on to connect the 6.8kΩ resistor directly to the 0V line. For lesser volume conditions, one of pins 14, 15, 12, 1, 5 or 2 are connected to 0V by the 4051.

The fact that transistor Q5 is turned on for maximum volume, whereas in the original circuit Q5 was turned on for minimum volume, means that the sense of the circuit is inverted. The 4029 now has to count up for a reduction in volume and down for an increase in volume. This is achieved without any further circuit modifications by swapping the up and down buttons on the transmitter.


There is also a difference in practice with this DC volume control version. In

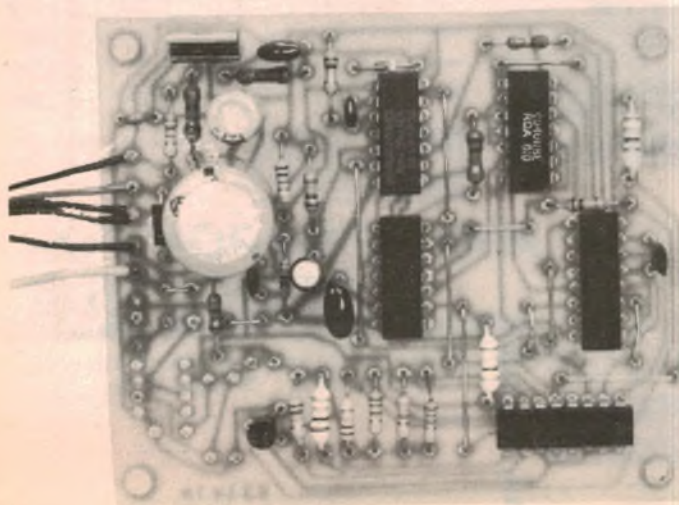

At left is the second version of the receiver board showing the vacant space in one corner of the board. At right is the modified circuit.

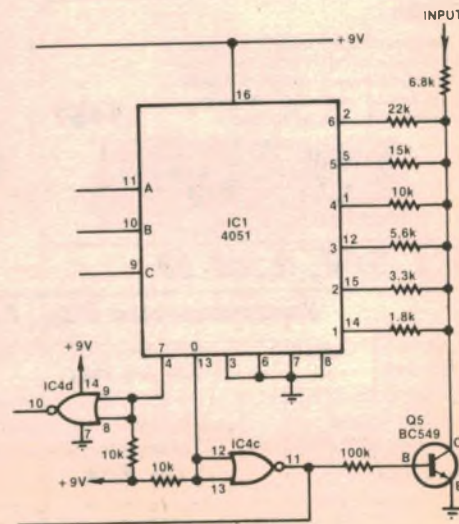



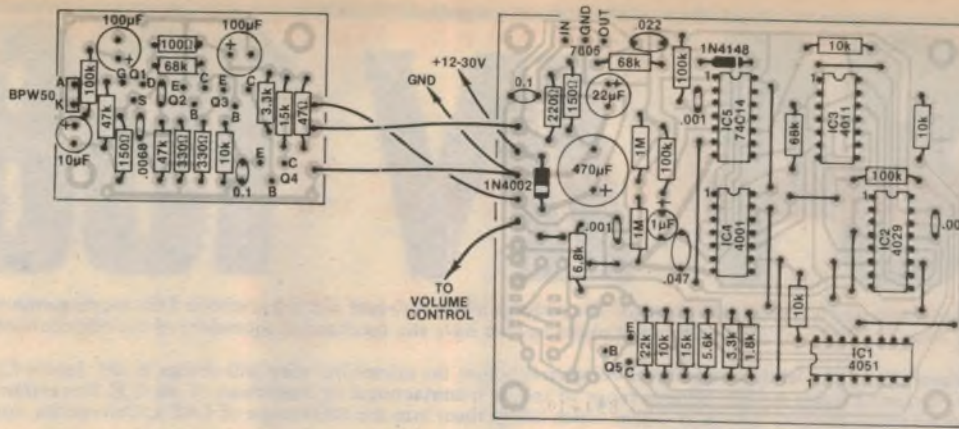

Only three connections need to be made to the TV set; they are the two for the supply and the volume control connection.

the previous version, the TV set volume control was set to provide a normal volume level and the 4051 would select a preset volume at switch-on. This is accomplished by means of the preset enable (pin 1 of IC2) and the associated jam inputs which give a preset count of 3 (ie, pin 12 of IC1 is selected).

The same preset condition applies to this DC volume control version of the circuit but now the TV set volume control is set for minimum volume, ie, fully anticlockwise. The reason for this is that if the TV set volume control is advanced, the remote volume control circuit will be unable to provide a zero volume control condition. Remember that the volume control works by reducing the DC voltage to give an increase in volume level.

The resistor values we have selected may not necessarily be appropriate for all sets with DC volume controls. It would be wise to check your TV set manual on this aspect before beginning construction. Better still, you can try the

effect of particular resistance values shunted across the TV set volume control by using jumper leads. (**Caution: This cannot be done safely on live-chassis sets.**)

It is also possible that some DC volume controls may work in the opposite sense to the example we have shown. In that case, the up and down buttons on the transmitter would be used as in the original version.

Construction of the printed circuit boards is exactly the same as presented in the January 1983 issue with the exception that IC6 and associated components are omitted, as mentioned previously.



### Testing

Testing this version of the circuit is simpler than last month's version. Wire the interconnecting leads between the two receiver PCBs and connect a power supply capable of providing between 12 and 30VDC. Check that the regulator is supplying close to 9VDC and that all ICs are receiving power.

Now connect the 9V supply from the regulator to the volume control input on the receiver board. Connect a multimeter (switched to a suitable DC voltage range) between 0V and the junction of 6.8kΩ and the shunt attenuator resistors. Now operate the transmitter and check that the voltage reading can be varied in eight steps between 9V and 0V.

If the voltage varies by only a few steps and not over the correct range, the most likely fault is that one of the A, B or C lines from the 4029 is open circuit. With testing complete, installation in the TV set can proceed.

Only three connections need to be made to the TV set circuitry. One to the main 12-30VDC supply, one to 0V and one to the volume control wiper. The latter connection can be made at the volume control itself which is usually somewhat inaccessible, or to the appropriate wire connection on one of the TV set PCBs. Set the TV set volume control fully anticlockwise and you are in business.

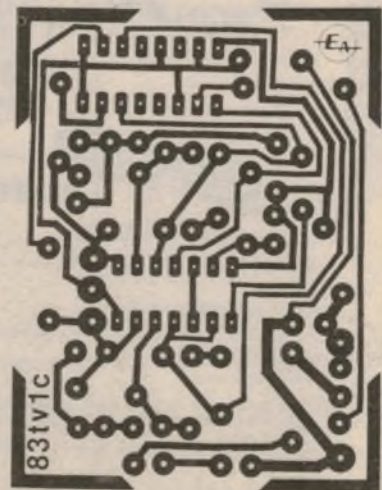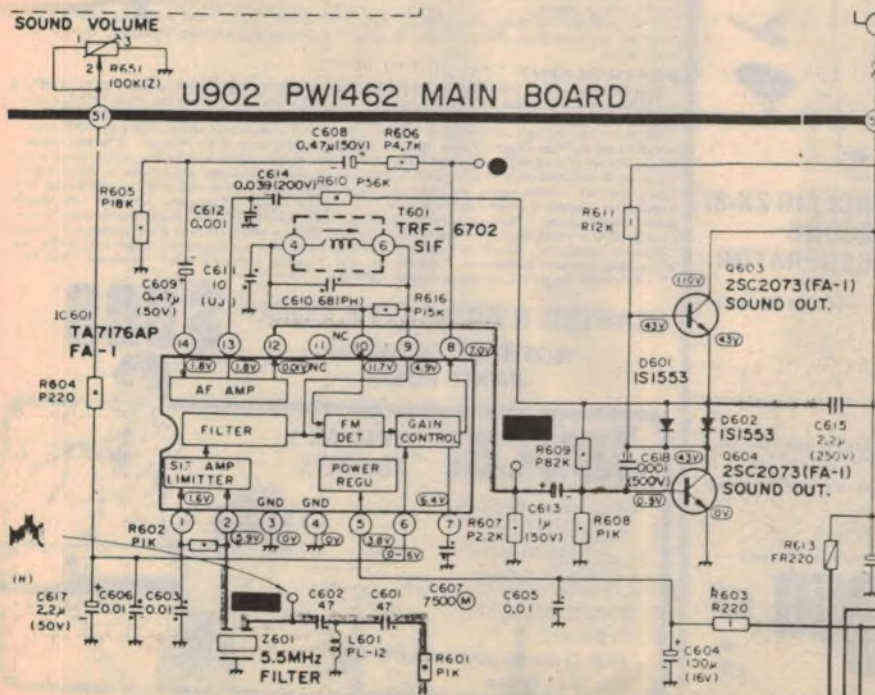

At left is portion of a recent model Toshiba TV set showing the sound stages and DC volume control. Above is a corrected version of the transmitter PCB which was shown on page 51 of last month's issue.

# 1984 IN 1983

The one-chip microprocessor started it almost 10 years ago. The concept of the low-cost micro has affected the world profoundly since then. It arrived a year early. Now, in 1983 — a year early some might say we have the mechanical equivalent to the microprocessor — the low cost micro-robot.

"Robots" have been around for quite a while now (so were computers before the micro) but they will change in '83. Jaycar Cybernetics Division has secured Australian marketing rights for the Genesis range of robots manufactured by Powertran of the U.K. Powertran's engineering staff have made a prodigious effort to produce robots at a cost which brings them into the R&D scope of CAE's, Universities, commercial organisations and even the dedicated Hobby Robotics individual.

The entire range of Powertran Robotic equipment will be sold and serviced by Jaycar Cybernetics division in Australia. Watch this space next month for further details of this extremely exciting development.

## SOMETIMES THINGS AREN'T WHAT THEY SEEM. . . . .

OK so you have had that high quality cassette deck for some time now. You were thinking of updating to one of those fancy 3 head microprocessor decks but — well they ARE expensive! Why not give your current deck a new lease on life?


If your deck is more than 3 years old and has had a bit of work its quite possible that the record/replay head is worn. This can lead to poor H.F. performance. Or it may have never been any good in the first place. Or you may want better performance than the head in your car cassette player can give.

Jaycar now stocks replacement very high quality cassette deck heads to suit most machines — especially Japanese. They are made in the U.K. by MONOLITH.

Amazingly most cassette deck heads are standard fittings (ETAJ). So even if you want to just refurbish that cheap player that you use to load programs into your computer Jaycar has the replacement head!

- |                 |   |                |
|-----------------|---|----------------|
| <b>C21RPS18</b> | <b>Mono record/playback</b>                       | <b>\$14.95</b> |
| <b>B24-02</b>   | <b>Stereo record/playback</b>                     | <b>\$17.95</b> |
| <b>B24-07</b>   | <b>Stereo record/playback for use with Dolby</b>  | <b>\$24.95</b> |
| <b>C42RPH04</b> | <b>Stereo record/playback glass ferrite faced</b> | <b>\$36.50</b> |
| <b>C21ES18</b>  | <b>Mono or stereo erase</b>                       | <b>\$7.95</b>  |

(All record/playback have mounting hole centres on 17mm pitch and 12.5mm from face of head)

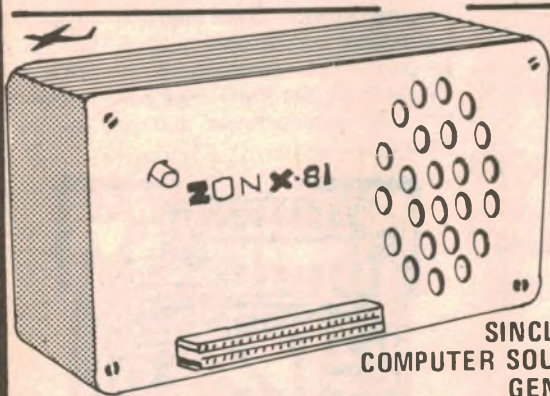

**SINCLAIR ZX-81  
COMPUTER SOUND  
GENERATOR**

Make amazing sound effects with your Sinclair Computer

- The ZON X 81 SOUND UNIT is completely self contained and especially designed for use with the ZX 81. It just plugs in — no dismantling or soldering
- No power pack, batteries, leads or other extras.
- Manual Volume Control on panel — ample volume from built in loudspeaker.
- Standard ZX 81 — 16K RAM pack or printer can be plugged into ZON X 81 Sound Unit without affecting normal ZX 81 operation
- Huge range of possible sounds for games or Music, Helicopters, Sci-Fi, Space Invaders, Explosions, Gun-Shots, Drums, Planes, Lasers, Organs, Bells, Tunes, Chords etc. or whatever you devise!
- Uses 3 channel sound chip giving programme control of pitch, volume of tones and noise, all with envelope control
- Easily adrdled to existing games or programmes using a few simple "BASIC" lines
- FULL instructions with many examples of how to obtain effects and the programmes. supplied.
- Extension card at base of unit allows further use of Sinclair Expansion Card.

**GREAT ADD-ON**

**\$69<sup>50</sup>**

## CLEF ELECTRONIC MUSIC

## MICROSYNTH COMPACT MUSIC SYNTHESIZER

Equally suited to home, studio or stage use, the Microsynth has resulted from an extensive re-think of what is required from a synthesiser. Its compact and economic design achieves high performance at low cost out sacrificing versatility or musical stability.

A highly efficient switched routing system for signals and/or control voltages is capable of rapid operation for live work, yet unlike other small synthesizers does not restrict the possibilities for complex sound creation. Despite its small size, the Microsynth can produce startlingly rich sounds owing to the number of waveforms available, together with the sub-octave voices. It is capable of advanced effects such as Ring Modulation as well as rhythmic "staircase" or random patterns.

Operates in two modes depending on the configuration of the second oscillator (VCO2), which can either run at audio frequencies or as a voltage controlled low frequency oscillator (LFO). In audio mode, VCO2 will track VCO1 perfectly over its entire range. A Thumbwheel allows manual control of oscillator pitch or filter cut-off frequency, depth of LFO modulation, etc., and internal power amplification will drive headphones or a monitor loudspeaker.

### SPECIFICATIONS (BRIEF)

- \* Keyboard — 2<sup>7</sup> octaves (30 notes) may be stepped through 5 octave range from 16" to 1" using the "Range" switch
- \* VCO1 — 10Hz to 10kHz, triangle output to VCA, ramp and square outputs to VCF \* VCO2/LFO — VCO mode 10Hz to 10kHz LFO mode 0.1Hz to 30Hz \* Sub octaves — 2 divide-by 2 \* Noise — white noise source with level control
- \* Envelope — attack and release times variable 0 to 10 seconds \* Retrigger — causes the envelope shaper to retrigger itself with a repeat time equal to the sum of the attack and release times \* Sustain — operates in 3 modes, manual, auto and hold
- \* VCF — state variable filter with manual control of roll-off frequency \* VCA — controls output volume of synthesiser
- \* Sample and Hold — analogue memory samples instantaneous output voltage from VCO2/LFO each time envelope ends
- \* Sweep \* Thumbwheel — Manual level control \* Power amp — output 2 watts into 8 ohms plus headphone socket
- \* Sequencer socket \* Size: 19 1/2" x 14" x 5 1/2" Weight: 10lb. Power: 240V AC 5W

TOP VALUE

**\$399**

## BAND-BOX

LIVE PERFORMANCE — Feed in, store, and play complete Music Pad of around 60-100 Backing Scores up to a total of approximately 3,000 Chord changes, each up to eight Beats in length, on more than 120 different chords.

Program: Intros, Chorus Repeats, Codas, Key changes and modulations on single or multi-tune sequences. Use simple Playback procedures for live performance, including optional foot operated controls.

PRACTICE SOLOISTS — Instrumental or Vocal Soloists grow to full four piece BAND performance played in any Key, Tempo, and Rhythm style for demanding practice sessions with unlimited, but controlled, Chorus repeats.

ELECTRO MUSIC RECORDING COMPOSITION — Full Chord sequence and Rhythm programmability for three instrumentalists enables creative Composing and Arranging for both Professional and Amateur applications.

### SPECIFICATIONS (BRIEF)

- \* Music simulation capacity — three backing instrumentalists. Over 3,000 programmable stored chord changes. 132 different chords plus additional inversions \* Chord instrumentalist — four note chords, four waveform options, four envelope options sixteen permutations for piano, organ etc., twenty four programmable rhythm patterns \* Bass instrumentalist — four voice /envelope combinations, eight rhythmic figures \* Drums — twenty four programmable patterns, eight tracks selecting eleven instrument sounds. Sticks, brushes & Latin American. Sequence operation up to 16 bar repetition \* Playback facilities — Keypad selection of score, display of selected score, variable tempo, switched selection of any key, in-play changes to key, repeats, Coda key to cancel repeats, automatic stop, manual instant stop, automatic reset to beginning of selected score, tempo and all instrument voices, rhythmic patterns and levels, bar down beat indicator, all beat indicator, unlimited chorus measures/beat selectable to match 4 drumming styles \* Composition facilities \* Composition instructions \* Pre-recorded scores \* Musical compass — Tuning range — one semitone, use alternative key for gross pitch change. Bass compass: 16 notes, F1 to G2 44Hz to 104Hz, chord instruments: 18 notes E3 to A4 165Hz to 440Hz, automatic chord inversion to fit compass
- \* Percussion instruments — Bass drum, low & high tom toms, snare drum, rim shot, cymbal, long & short brushes, high bongo, claves, and accent for dynamics \* Operator interfaces — numerous \* External socket: — numerous \* Size: 19" x 11" x 4 1/2" overall. Weight: 11lb. Power requirements: 240V 6W

(MASTER RYTHM KIT EXTRA)

**\$699**

BOTH UNITS ABOVE  
IN KIT FORM


## Jaycar NUMBER 1 FOR KITS

125 YORK STREET SYDNEY 2000  
PHONE: 264 6688 TELEX: 72293  
NEVILLES CORNER  
Cnr. CARLINGFORD & PENNANT HILLS ROAD  
CARLINGFORD  
PHONE: 872 4622 or 872 4644  
NAIL ORDERS TO: BOX K 35 HAYMARKET SYDNEY 2000

JUST AND PACKING CHARGES  
VIC: \$5.95 (S.H. 5.10) S.A. \$6.95 (S.H. 2.00)  
N.S.W. \$4.95 (S.H. 5.00) S.A. \$5.95 (S.H. 2.00)  
\$1.00 (incl. S.H. 0.00)

Mail Order By **BANKCARD**  
Via Your Phone



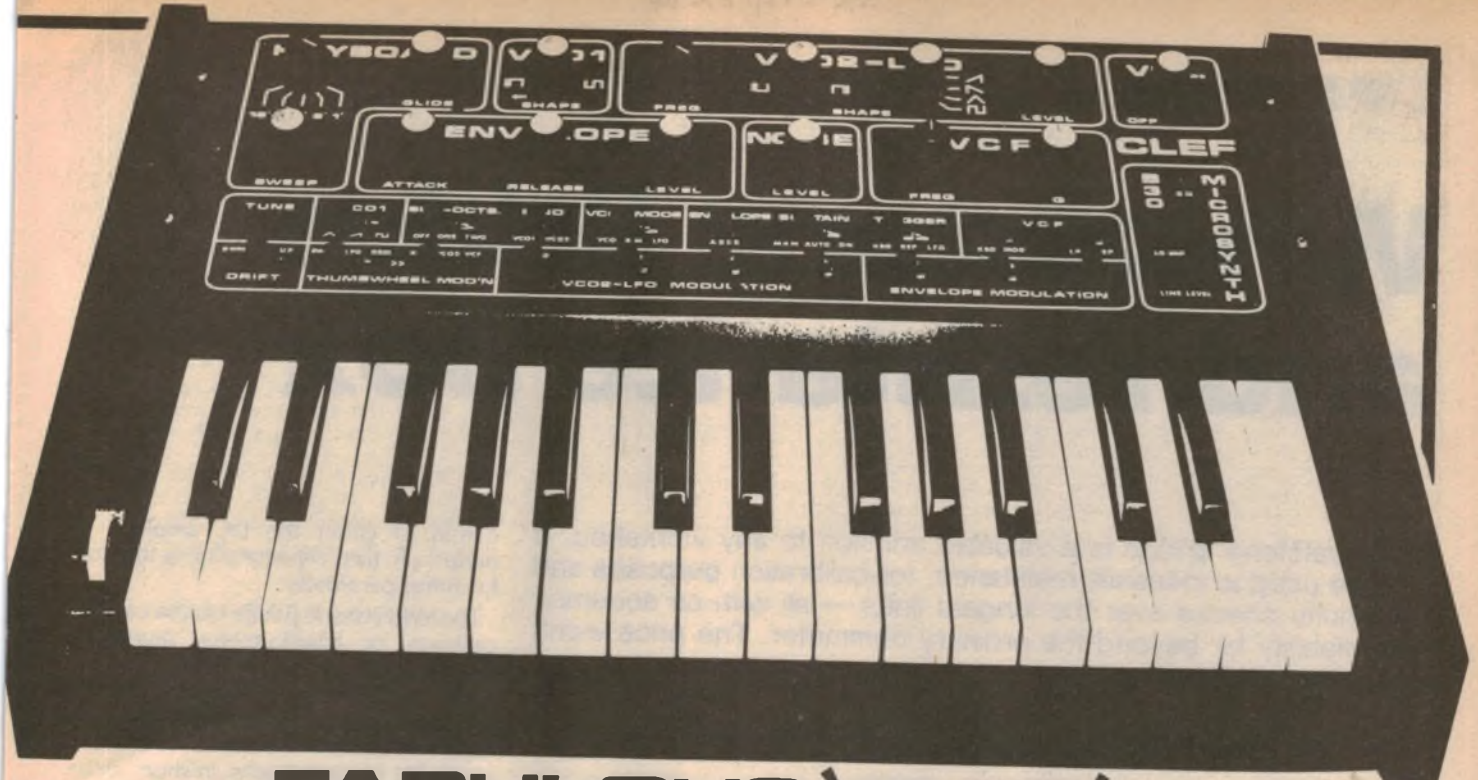

# FABULOUS 'CLEF' MICROSYNTH

LEVEL

TONE

TEMPO

PROGRAM CONTROL RHYTHM SELECT

**Clef Master Rhythm**

PLAY REST

LINE NUMBER GROUP COLUMN VALUE

BASS INST

CHORD INST

MASTER LEVEL

TO CODA

INIT PAGE

RESET ENTER

DRUMS BASS CHORD MIX VOLUME FOOT PWR ON

OUTPUTS PEDAL SWITCH

**CLEF COMPUTER BAND-BOX**

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0	C	Em	F#m	G	A	Bm	C#m	D	E	F	G#m	A#m	B	C	D	E
1	C	Em	F#m	G	A	Bm	C#m	D	E	F	G#m	A#m	B	C	D	E
2	D	Em	F#m	G	A	Bm	C#m	D	E	F	G#m	A#m	B	C	D	E
3	E	F	G	A	B	C	D	E	F	G	A	B	C	D	E	F
4	F	G	A	B	C	D	E	F	G	A	B	C	D	E	F	G
5	G	A	B	C	D	E	F	G	A	B	C	D	E	F	G	A
6	A	B	C	D	E	F	G	A	B	C	D	E	F	G	A	B
7	B	C	D	E	F	G	A	B	C	D	E	F	G	A	B	C
8	C	D	E	F	G	A	B	C	D	E	F	G	A	B	C	D
9	D	E	F	G	A	B	C	D	E	F	G	A	B	C	D	E
10	E	F	G	A	B	C	D	E	F	G	A	B	C	D	E	F
11	F	G	A	B	C	D	E	F	G	A	B	C	D	E	F	G
12	G	A	B	C	D	E	F	G	A	B	C	D	E	F	G	A
13	A	B	C	D	E	F	G	A	B	C	D	E	F	G	A	B
14	B	C	D	E	F	G	A	B	C	D	E	F	G	A	B	C
15	C	D	E	F	G	A	B	C	D	E	F	G	A	B	C	D

MEASURES PER BEAT

PLAYBACK KEY

BASS INSTRUMENT

CHORD INSTRUMENT

VOICE

FORM ENV

# AT LAST ~ THE BAND BOX

Two projects for the price of one!

# Wheatstone Bridge and resistance box

A Wheatstone Bridge is a valuable addition to any workshop. It can be used to measure resistance, for calibration purposes and continuity checks over the longest lines — all with an accuracy and stability far beyond the ordinary ohmmeter. The price won't break the bank, either.

by COLIN DAWSON and K. J. ELLIS\*

With the ready availability of 1% tolerance metal film resistors at low prices, it has become possible to design and construct a modern economy version of the classic "Wheatstone Bridge". Despite its laboratory origins, this device is a valuable adjunct to any hobbyist workshop, having a potential accuracy and stability as good as or better than similar digital instruments costing many times its price. The Wheatstone Bridge uses both digital and analog techniques, and could well lay claim to being the first digital readout device, by the comfortable margin of a century or so.

The unit to be described is simple to construct, compact and portable and costs little more than a cheap 20,000

ohms/volt multimeter. It can be used to measure the DC resistance of virtually any component over a wide range, with an accuracy governed only by the precision of its internal resistors. Values from  $0.001\Omega$  to  $9.999M\Omega$  — at up to four easily read significant figures — are given, and no calculations are involved in normal usage. Using "off the shelf" resistors in the critical areas should give around 1% accuracy, with a maximum error of 2% at the range limits.

No external accessories such as probes are required, and for portability the instrument is powered by low-cost batteries with long life expectancy. A simple operational amplifier drives a small centre-zero tuning meter, eliminating the delicate and expensive galvanometer normally employed in the classic Wheatstone Bridge. Accuracy is not re-

quired of either the DC amplifier or meter — in fact "repeatability" is their only critical parameter.

The Wheatstone Bridge can be used to calibrate or adjust meter shunts or multipliers, matching or selection of accurate resistors for equalisers and attenuators, coil and transformer winding resistances, switch contact checks and a multitude of similar tasks. In short, an instrument capable of results far beyond a multimeter's normal resistance ranges.

Subject to the case chosen (a suitable unit could even be reposing in your junkbox), the all-up cost for the complete unit runs at between \$30 and \$40 which by today's standards is fairly modest.

## How it works

The circuit of the basic Wheatstone Bridge is shown in Fig. 1. When resistance  $R_Y$  is adjusted so that  $R_A/R_B = R_Y/R_X$ , a "balanced" condition of the bridge exists and a "null" or zero reading is seen by the meter or null indicator. By varying the ratio arms  $R_A$  and  $R_B$  and calibrating  $R_Y$ , an enormous range of unknown resistance  $R_X$  can be determined, the accuracy being determined by the precision of  $R_A$ ,  $R_B$  and  $R_Y$ . This, of course, is where the 1% resistors come into the picture.

The "null" indication is controlled by the error signal, the sensitivity of the meter and the bridge excitation voltage,  $E$ . A centre-zero meter is mandatory here, as high or low conditions can occur. This assists in the setting of  $R_Y$  to the correct balance point.

$R_Y$  is actually a chain of resistors, as shown in the circuit diagram. It consists of four single pole 12 position rotary switches of the normal shorting rotor type. Each switch has nine resistors wired across its fixed contacts. The switches, from left to right, are:


- S2, covering 0-9k $\Omega$  in 1k $\Omega$  steps
- S3, covering 0-900 $\Omega$  in 100 $\Omega$  steps
- S4, covering 9-90 $\Omega$  in 10 $\Omega$  steps
- S5, covering 0-9 $\Omega$  in 1 $\Omega$  steps

These four switches and their associated resistors will be referred to as

\*K. J. Ellis 84 Lamorna Av, Beecroft NSW 2119.



The Wheatstone Bridge can measure resistance values from  $0.001\Omega$  to  $9.999M\Omega$ .

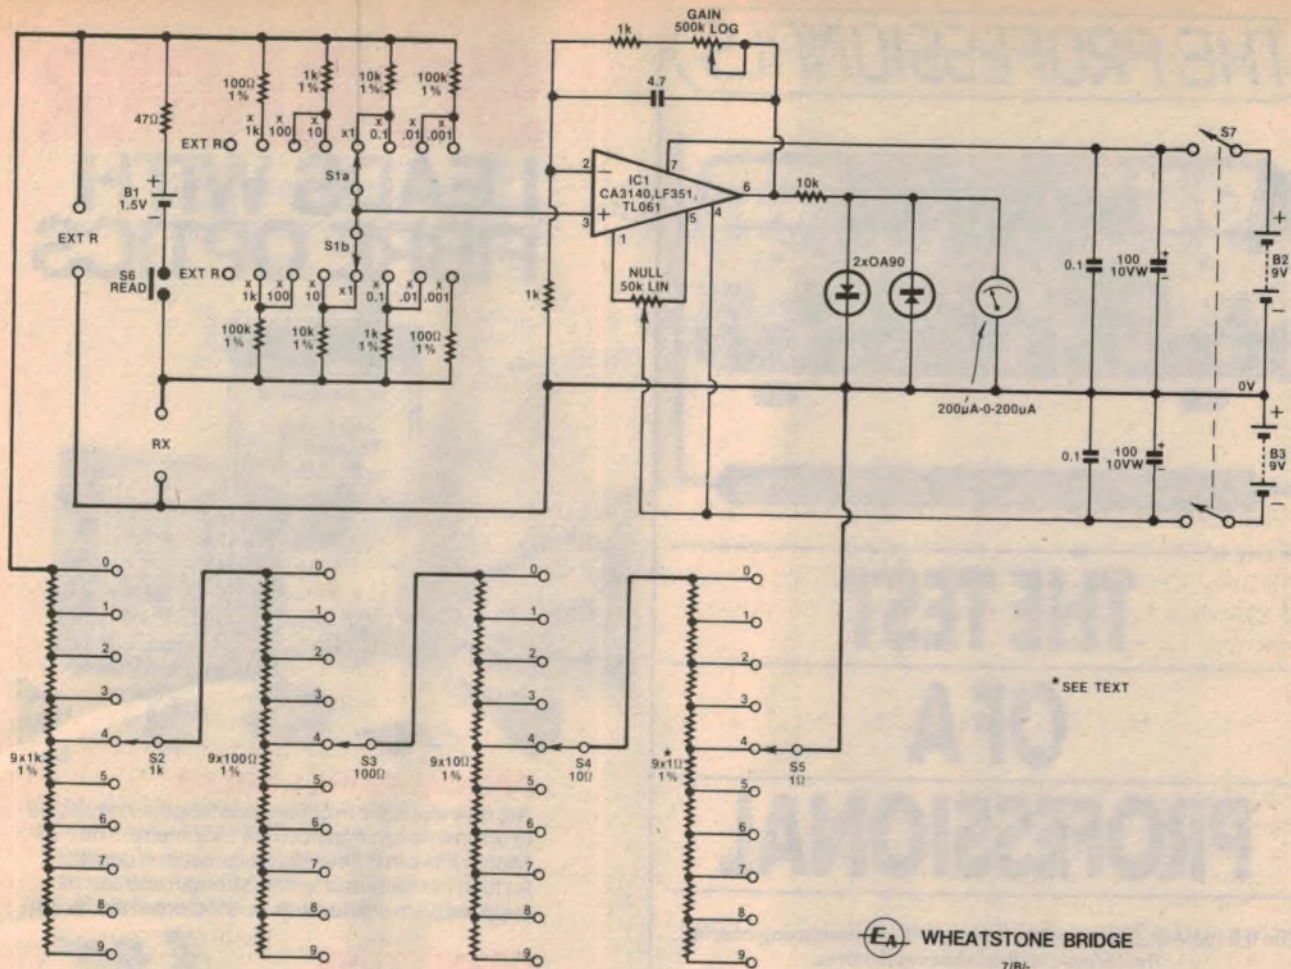

**WHEATSTONE BRIDGE**  
7/B1-


The circuit is a classic Wheatstone Bridge with Fet-input op amp IC1 operating as a differential amplifier.

the decade switches, the whole group as the decade box. It can be seen that the four decade switches in series cover a range from 0 to 9,999Ω and intermediate values between these limits are obtained in 1.0Ω steps, governed only by the accuracy of the resistors and the relatively insignificant resistance of the switch contacts and internal wiring in series with RY.

The use of 1% resistors for S2, S3 and S4 and the series method of operation – tending to average out the highs and lows – means that better than 1% accuracy can be expected over this section. S5 uses 2% carbon resistors as values below 10Ω are unavailable in metal film. The 2% types can be selectively measured if desired (as can indeed the resistors for S2, S3 and S4) if higher accuracy is sought, but bear in mind that S5 really only controls the fourth significant figure, which is of least importance.

**Decade box feature**

RA and RB form the arms of the bridge in conjunction with S1, and will be henceforth called the multiplier. A two deck, single pole 8-position switch is called

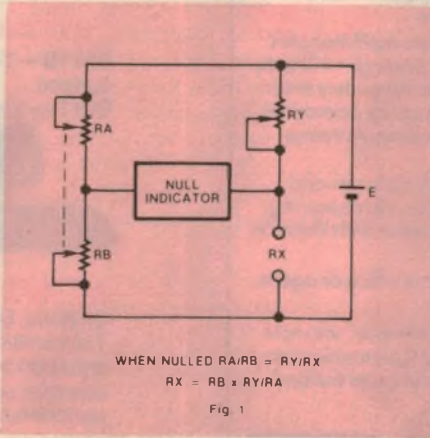

ed for here. By setting this switch to the external ("Ext") position, the decade box is isolated from the rest of the bridge circuit. This allows it to be used independently, with the adjustable resistance value taken from the "R OUT" terminals.

The decade box is invaluable when used for design or experimental work – in fact wherever an "off beat" resistance value below 9,999Ω is required. This can

be a real life saver on occasion, however the total wattage rating of RY must naturally be respected.

Ideally the eight resistors used with S1 should be as accurate as possible, hand-picked if this is practical. Using normal 1% resistors and taking the worst possible cases of RA 1% high, RB 1% low or vice versa, an error of 2.02% one way & 1.98% the other would be introduced. This error is reducible to zero, but the maximum errors given above could reasonably be expected to be lowered by the law of averages, should off-the-shelf 1% resistors be used.

Note that the fourth significant figure would be slightly suspect if stock 1% values are used.

**Circuit description**

The electronics of the instrument are quite straightforward and quite conventional, and will therefore be described briefly. A printed circuit board (PCB) measuring 106 x 28mm is used for the amplifier circuitry. The actual op-amp used can be either an LF351, CA3140 or for low battery consumption, a TL061. The bandwidth of the amplifier will vary with

THE PROFESSIONALS



# THE TEST OF A PROFESSIONAL

The IFR FM/AM-500 is a classic example of IFR design engineering. It incorporates the following features.

**STANDARD** • FM Signal Generator • AM Signal Generator  
• Sensitive 2 $\mu$ V receiver for AM, FM and SSB • 1kHz audio generator • Frequency error meter • Automatically protected generator output to 150 watts (no bothersome fuses to replace)  
• 0.5 PPM TCXO • Microphone/accessory input • Audio demodulator output • Low price

**OPTIONAL** • 0.2 PPM TCXO • 0.03 PPM oven oscillator plus high resolution frequency error meter (simulcast paging) • 10Hz to 9999.9Hz variable audio generator plus audio frequency error meter • Internal rechargeable battery (2 hour battery operation)  
• High output amplifier • Microphone • Telescoping Antenna

It weighs a remarkably low 7.2kg – 9.9kg with batteries and accessories, and is contained in a compact enclosure measuring only 29.2cm W x 12.5cm H x 36.2cm D. And it comes with Vicom's full two year warranty.

Inspect the IFR FM/AM-500 at your nearest Vicom office or agent (listed below).

Vicom. The Professionals. The official representatives of the most significant overseas companies in the Electronic Communication Industry. And backed up by Vicom's professional expertise and unbeatable after sales service.



VICOM INTERNATIONAL PTY. LTD.,  
57 City Road, South Melbourne, Victoria (03) 62 6931.  
Eagle House, 118 Alfred Street, Milsons Point, N.S.W. (02) 436 2766.  
Malvicom, 18 Rarae Road, Lower Hutt, Wellington, New Zealand (4) 697 625.  
Wormald Communications, 72-80 Belgrave St., Belmont, W.A. (09) 277 8944.  
Elita Electronics, 8 Cox Road, Windsor, Q'ld. (07) 579 400.  
International Communications, 8 Nile Street, Port Adelaide, S.A. (08) 473 688.  
Navcom Electronics, 6 Manton St., Darwin, N.T. (089) 817 414.

Burrows Doble Lawrence VIC/360/EA

# SOANAR LEADS WITH FIBRE OPTICS



## OPTICAL FIBRE CABLES

Are now available in continuous lengths in multiples of one metre to a maximum of 1 kilometre. The 125 Micron Fibre in 2.7mm diameter cable is designed for high flexibility and tensile strength and can be supplied plain or fitted with connectors at the factory.

## CONNECTORS

Enable fibre optic cables to be joined together or coupled to transmitters, receivers and other active components.



## CUTTING & STRIPPING TOOLS

**S311S** — Cuts optical fibre squarely for a mirror-like surface.

**S211** — Removes covering from optical fibre.



## ACTIVE COMPONENTS

Emitters, Detector/Preamplifiers, Transmitting and Receiving Modules suitable for medical electronics, industrial controls, security, computer and peripheral systems.



Technical Information Available on Request

# SOANAR

SOANAR ELECTRONICS PTY. LTD.  
INCORPORATED IN VICTORIA

30-32 Lexton Road, Box Hill, Vic., 3128, Australia.

VICTORIA: 840 1222


QUEENSLAND: 52 1131

N.S.W.: 789 6733

WEST AUST: 381 9522

STH. AUST: 42 8918

TASMANIA: 31 6533

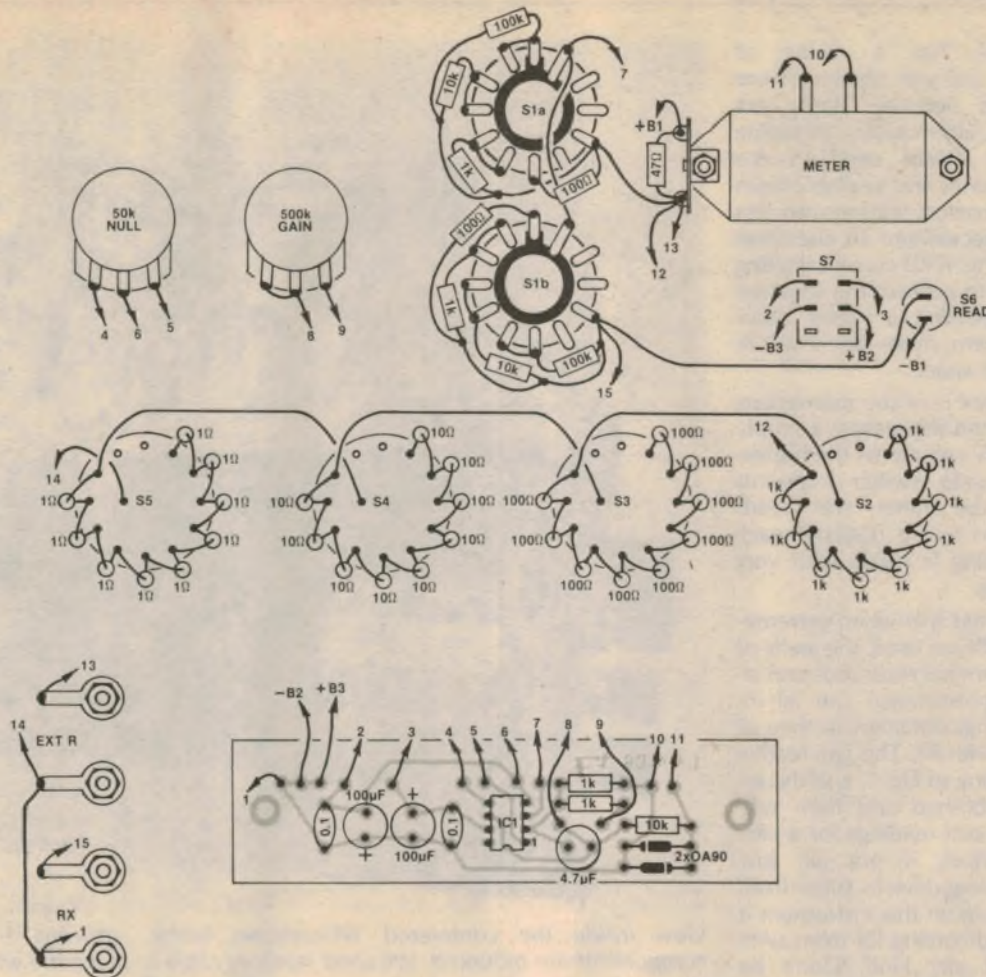

Note that two unused contacts on switch S1a,b are used as wiring points.

the setting of the gain control, but as we are using the op-amp as a DC amplifier this is of no consequence.

The non-inverting input of the op-amp (pin 3) is fed from the junction of RA and RB (Fig.1). The inverting input (pin 2) is grounded via a 1kΩ resistor and also has feedback from the output (pin 6) applied to it. There are two paths for this feedback which can be considered as AC and DC feedback. The AC feedback path is provided by a 4.7µF non-polarised capacitor which severely attenuates the gain of the op-amp for any AC signal. DC feedback is provided by a series 1kΩ resistor and a 500kΩ variable resistance. The variable resistance is the gain control and can be adjusted from the front panel of the Wheatstone Bridge. The gain is adjustable over the range 1-500.

The output of the op-amp can swing to virtually the supply rail voltages of ±9V. In fact it can be expected to do so when a large input error exists, ie when the value of RX differs markedly from the value selected in the decade box. To protect the meter movement, which would be grossly overloaded by such voltages, a 10kΩ resistor is included in

series with the meter. The value of 10kΩ is a compromise between providing meter protection with large input errors and an acceptable amount of sensitivity with small input errors. As such, it is still possible to deflect the needle against the "stoppers", but additional protection provided by back-to-back OA90 germanium diodes across the meter ensures that the amount of overload is not likely to be damaging.

Offset voltage adjustment is provided to pins 1 and 5 of the op-amp by the 50kΩ potentiometer, eliminating a false "null" and becoming the front panel "balance" control. No calibration of the circuit is required other than the correct setting of the "balance" control before taking a reading. Offset drift is non-

existent at normal gain settings.

As most of the components are mounted on the front panel controls, the printed circuit board used for this project is quite small, measuring only 28 × 106mm. This board - coded 83wb1 - carries the op-amp, supply bypass capacitors and a few other components. A centre-tapped 18V supply - provided from two 9V batteries (Eveready 216 or equivalent) - is required for the amplifier part of the circuit. The current drain for this part of the circuit is about 3mA, or less than 1mA using a TL061.

### Excitation

The bridge excitation voltage is provided by a D type 1.5V cell. Under most test conditions, the current in the bridge circuit is negligible. However with the x 0.001 multiplier selected and very low values or RX under test, the bridge current could become excessive. For this reason, a 47Ω resistor in series with the cell limits the current to 30mA.

The meter used for the project should be a small, centre zero type. The particular meter shown in the accompany-

We estimate that the current cost of components for the project is approximately

**\$45.00**

This includes sales tax but not the cost of batteries.


ing photograph has a rating of  $200\mu\text{A}$ - $0$ - $200\mu\text{A}$ , and was obtained from Radio Despatch Service. There are several suitable alternatives, including the centre-zero meter used in the Playmaster FM Tuner and available from Dick Smith Electronics. Meters with less sensitivity may necessitate an alteration to the value of the  $10\text{k}\Omega$  current limiting resistor in order to achieve the required deflection. If selecting a meter other than the one shown, make sure it will fit into the available space.

The "read" switch is of the momentary contact type. When depressed, it simply connects the 1.5V cell across the bridge. To prevent decade switch transients from affecting the meter, the "read" switch may need to be released each time a new setting is made with very high gain settings.

It should be noted that when extremely low values of RX are used, the leads of RX, the bridge terminal resistance and internal RX wiring resistance can all influence the readings obtained, as they all appear in series with RX. This can readily be seen by referring to Fig. 1, and the error can be established and then subtracted from the dial readings for an accurate result. Most, if not all, low resistance measuring devices suffer from the above problem; in this instrument it is minimised by divorcing RX from switched circuits of any kind. Don't be unduly alarmed by this; bear in mind that RX values of below  $0.1\Omega$  are the only ones to be affected.

### Construction

The Bridge is built up in any reasonable case or box which can accommodate the controls on its front panel. As can be seen from the accompanying

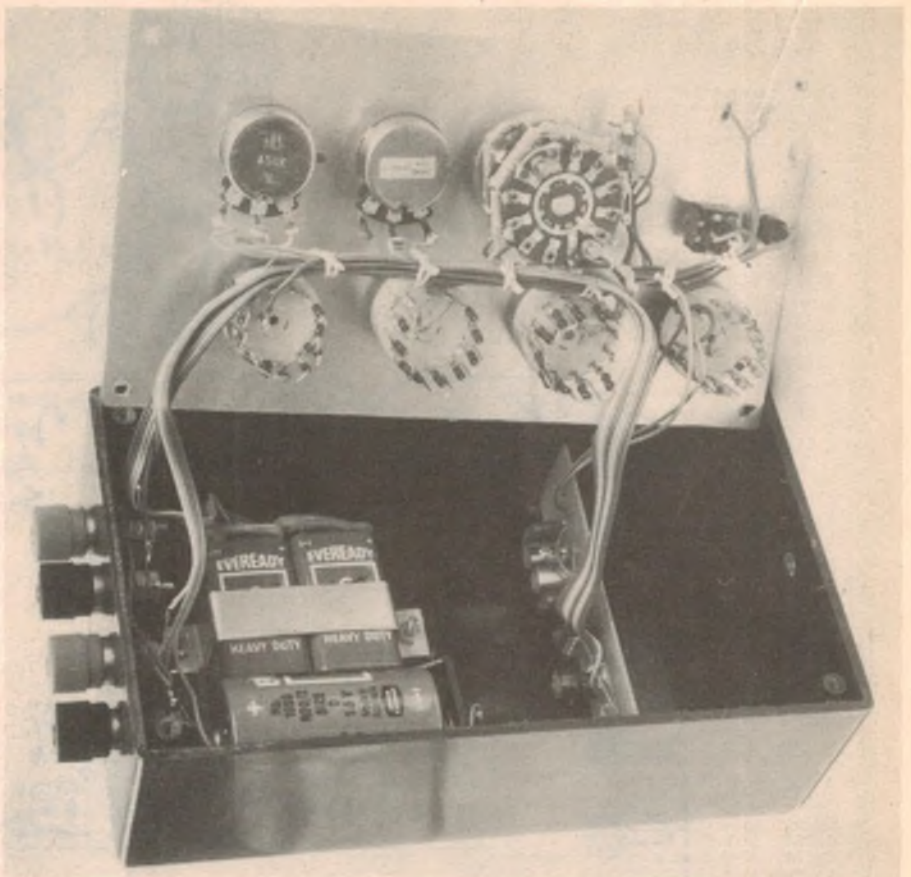

View inside the completed Wheatstone Bridge, showing how the various components are mounted. We used rainbow cable to make the wiring connections.

photographs, it is possible to cram the "works" into the largest size plastic utility box which measures 196 x 113 x 60mm. The only components not mounted on the lid are the PCB, batteries, terminal posts and a separate  $47\Omega$  resistor. Start by mounting the PCB components, the IC being the last component to be soldered onto the PCB.

The batteries are clamped to the bottom of the case using scrap aluminium in the case of the two 9V batteries and a battery holder for the 1.5V cell. Snap connectors are used for the 9V batteries. When making the connections to the battery holder, remember the  $47\Omega$  resistor in the positive line. This can be soldered to a small tag strip which, in

## MASTER ELECTRONICS NOW! The PRACTICAL way!

This new style course will enable anyone to have a real understanding of electronics by a modern, practical and visual method. No previous knowledge is required, no maths, and an absolute minimum of theory.

You learn the practical way in easy steps mastering all the essentials of your hobby or to start or further a career in electronics or as a self-employed servicing engineer.

All the training can be carried out in the comfort of your own home and at your own pace. A tutor is available to whom you can write personally at any time, for advice or help during your work. A Certificate is given at the end of every course.

You will do the following:

- Build a modern oscilloscope
- Recognise and handle current electronic components
- Read, draw and understand circuit diagrams
- Carry out 40 experiments on basic electronic circuits used in modern equipment
- Build and use digital electronic circuits and current solid state 'chips'
- Learn how to test and service every type of electronic device used in industry and commerce today. Servicing of radio, T.V., Hi-Fi and microprocessor/computer equipment.

New Job? New Career? New Hobby? Get into **Electronics** Now!

Post coupon now:

**The Australian School of Electronics Pty. Ltd., (Inc. in Victoria)**

PO Box 108, Glen Iris, Victoria, 3146

A Registered Correspondence College



**FREE**  
COLOUR BROCHURE

Please send your brochure without any obligation to:

Name \_\_\_\_\_

Address \_\_\_\_\_

Post Code \_\_\_\_\_

EA 282



**BILL EDGE'S**

# ELECTRONIC AGENCIES

115-117 Parramatta Rd, Concord 2137  
(Corner Parramatta Rd & Lloyd George Ave)  
Telephone (02) 745 3077 (two lines)  
117 York St, Sydney Phone 29 2098

**Mail Orders:**  
PO Box 185  
Concord  
2137

\$1	NSW & ACT ONLY	\$1.50	VIC SA QLD TAS WA NT
\$5	— \$ 9.00	\$2.50	\$1 — \$ 9.00
\$10	— \$24.99	\$2.50	\$10 — \$24.99
\$25	— \$49.99	\$3.50	\$25 — \$49.99
\$50	— \$99.99	\$4.50	\$50 — \$99.99
\$100	or more	\$5.50	\$100 or more



**TRADING HOURS**  
BOTH STORES  
Mon-Fri 9 am-5:30 pm  
York St., Thursday 1-8 pm  
Saturday 9 am-12 pm

All heavy or bulky items (over 20kg) sent Comet Road Freight \$12.00 anywhere in Australia.

**New from MicroBee . . . the 'PLUS' Series . . . from the new 16K PLUS to the 64K PLUS (with optional disk system) MicroBee now offers you a range of microcomputers with capabilities far greater than anything else in a similar price range.**

The 16K PLUS and 32K PLUS are both stand alone personal computers based on the powerful Z-80 microprocessor, with either 16K or 32K of CMOS RAM. These low power RAMS allow programs to be held in memory by using the Battery back-up system now standard on the new MicroBee PLUS series.

Standard features of the MicroBee PLUS Series now include:

- RS232 serial interface.
- Parallel interface.
- Battery back-up.
- Programmable character generation.
- Cassette interface with I/O at either 300 or 1200 baud.
- 16k of BASIC in ROM.
- Selected continuous memory.
- Full size 60 key QWERTY keyboard layout.

**HARDWARE:**

XE5000	MicroBee 16K PLUS	449.00
XE5100	MicroBee 32K PLUS	549.00
XE5200	MicroBee 64K PLUS	699.00

**SOFTWARE:**


**MicroBee CASSETTES**

XE6000	Graphic Games	9.95
XE6010	Missile Wars	9.95
XE6020	PCG Tutorials	9.95
XE6030	Space Invaders	14.95
XE6040	Concentration	9.95
XE6050	Chess	9.95
XE6060	Typing/Solitaire	9.95
XE6070	Target	9.95
XE6080	Lunar Lander/Hurkle	7.95

**SOFTWARE IN ROM:**

XE6090	Star Shoot/Hangman	7.95
XE6100	Biorhythm/Calendar	9.95
XE6110	Eliza	9.95
XE6120	Kids Game	9.95
XE6130	Master Mind/Nim	9.95
XE6140	Chase/Wumpus	9.95
XE6150	Z Trek	9.95
XE6160	"Esc" Key	9.95
XE6500	MicroBee Editor/Assembler	59.50
XE6600	MicroBee Word Bee ROMPAK	89.50
XE6700	MicroBee 51 Basic Upgrade	20.00

## MicroBee



**MicroBee Phone Orders (02) 29 2098**

**TEXAS TI59 CALCULATOR ONLY \$222.00**

Tax free \$193.50  
DON'T PAY \$289.00  
Brand new in cartons with all the usual cards, guides, case and AC charger  
Software available for TI58/59  
• Real Estate/Investment Library  
• Securities Analyst Library  
• Business Decisions Library  
• Electrical Engineering  
• Surveying Library  
All \$27.80 each.

**OTHER TEXAS CALCULATORS**  
2E7060 TI55 \$44.50  
2E7066 MBA BUSINESS ANALYST \$52.75  
2E7068 BUSINESS ANALYST 2 \$34.50

**LATEST KITS**  
KE0196 Boggles Goggles \$9.50  
KE0056 Super Siren \$22.00  
KE1068 Tuning Fork \$23.00  
KE1088 Driveway Sentry \$32.00  
KE1635 Electric Fence \$15.00  
KE1800 DC DC Inverter \$35.00  
KE1940 Power Up \$39.50  
KE1944 0.30 volt Power Supply \$48.50  
KE3020 Stereo Synthesiser \$55.00  
KE4076 Digital Readout 10mhz \$41.00  
KE1890 ETI Eptrom Programmer \$43.50  
KE5060 ETI Graphic Equaliser \$199.00  
KE1627 Freezer Alarm \$21.50  
KE7000 ETI Train Controller \$39.50  
KE7001 Balanced Input Preamp \$19.50

**DIGITAL CLOCK CHIP NATIONAL MM5309**

This IC interfaces to LED or Gas Discharge displays with minimum additional components, and requires only a single power supply. It operates on a power supply range of 11-19 volts and does not require a regulated supply. The device is in a 28 pin DIL package.

- Features:
- 50 or 60Hz operation
  - 12 or 24 hour display format
  - Leading-zero blanking (12 hour format)
  - 7 segment outputs
  - single power supply
  - fast and slow set controls
  - Internal multiplex oscillator
  - BCD outputs
  - 4/6 Digit display mode
  - output enable control
  - Reset facility
- Applications:
- Desk clocks
  - Automobile clocks
  - Industrial clocks
  - Interval timers
- Full Data supplied with each chip. This device normally sells for \$24.00. We have a limited quantity available.

**ONLY \$5.95 ea Cat ZE5309**

**WE SELL THE BEST KITS**

**UPGRADED TRANSISTOR ASSISTED IGNITION KIT**

See EA Jan. 1983  
This new addition gives longer spark duration and more reliable operation. Our kit includes a die cast box for less interference and to keep out the nasties like water, dirt, grease and oil.

**ONLY \$35.00** KE1825

Why not add a Breakerless Ignition kit as well for a full reliable electronic ignition system.

**\$19.50** KE1850

**WIRE SPECIAL**  
We have a quantity of 21/0081 hookup wire. It is various colours and has another colour striped down the cable. It has 21 strands and is just right for those big wiring looms.

200 metre roll \$4.95 usually about \$20.00 Cat WE6430

**NEW**  
12 volt Lamp with leads 50mA SE3255 65c

**Transformer Transforms PL201/60VA**  
110 volt primary  
12 volt secondary at 60VA  
Two connected in series will give a primary of 240 volt. This transformer would normally sell for \$21.90 each.

**MORE SPEAKERS 2 1/2 INCH TWEETER**

2 oz. Ferrite Magnet  
Nominal Impedance 8 OHM (1 inch)  
Voice Coil Dia 6 WATT (RMS)  
Power Rating 3000 Hz  
Crossover Freq (to) 100 dB/W  
Nominal Sensitivity 1000-20000 Hz  
Response Range 1250 MAXWELL  
Flux Density 8800 GAUSS  
Net Weight 60 (5.65 gr/oz)

**EPROM BURNER KIT FOR MICROBEE.**

ETI 668 See ETI FEB 83  
KE 7005 \$44.50

**WE ARE THE KIT SPECIALISTS**

**\$3.95 each or two for \$6.95.**

**2 1/2 INCH TWEETER**

2 oz. Ferrite Magnet  
Nominal Impedance 8 OHM (1 inch)  
Voice Coil Dia 6 WATT (RMS)  
Power Rating 3000 Hz  
Crossover Freq (to) 100 dB/W  
Nominal Sensitivity 1000-20000 Hz  
Response Range 1250 MAXWELL  
Flux Density 8800 GAUSS  
Net Weight 208 (7.24 gr/oz)

**3/4 INCH MID RANGE**

4.6 oz. Ferrite Magnet  
Nominal Impedance 8 OHM (1 inch)  
Voice Coil Dia 130 WATT (RMS)  
Power Rating 320 5000 Hz  
Nominal Resonant Freq (to) 98 dB/W  
Response Range 320 5000 Hz  
Total Flux 37500 MAXWELL  
Flux Density 7500 GAUSS  
Net Weight 565 (19.8 gr/oz)

**WE ARE THE KIT SPECIALISTS**

**\$4.75**

turn, is retained by one of the meter mounting screws.

When mounting the rotary switches take the extra trouble to drill locating pin holes to suit your particular switches, the drill size normally being 3mm. File a grub-screw flat on the switch shafts if they are not already machined. This minor extra effort will be repaid by the switches and knobs retaining their original positions for life.


Choose black knobs with white or grey markings to obtain the "test equipment look". If using the Scotchcal front panel designed for the project, all the required numbers and titles are provided. The knobs used on the prototype are quite inexpensive and are available from Jaycar Pty Ltd.

As a matter of convenience, we have used rainbow cable for all the internal wiring, but the accuracy of the  $\times 0.001$  range would be improved slightly by using a heavier gauge wire. A suitable choice would be  $32 \times 0.2\text{mm}$  (or heavier). Good quality binding-post terminals with 4mm sockets are required for RX and the decade box output, permitting the use of standard test leads if desired.

At this point, all fitting and internal wiring should be completed. The resistors and wiring of the multiplier switch in particular should be double checked; in fact re-check all the five-banded 1% resistors for correct values. If you have never handled 1% five-banded resistors before read the following remarks carefully as at least two traps could be your downfall.

(1) All the 1% resistors used in this project, based as they are on decades, commence with the digit one. As the band colour for 1% tolerance is brown, we have therefore a large quantity of tiny resistors with a brown band at each end. The possibility of reading one or more "backwards" is quite high, to say the least. Remember, the tolerance band (five) is always to the right when decoding the colours; the trick is to identify band five, as manufacturers differ in their approach. Some bunch the first four bands towards one end, leaving a wide margin at the band five end, Some simply space out the bands evenly, but use a broader band five. Some bunch the first four bands closely, with a wide gap between four and five. Some use a combination of these various methods, we suggest that you have a good look at all this before switching on, checking with a conventional ohmmeter if you are uncertain.

(2) The multiplier band four is the second pitfall. These five band resistors were introduced as the E48 and E96 series, allowing three significant figures

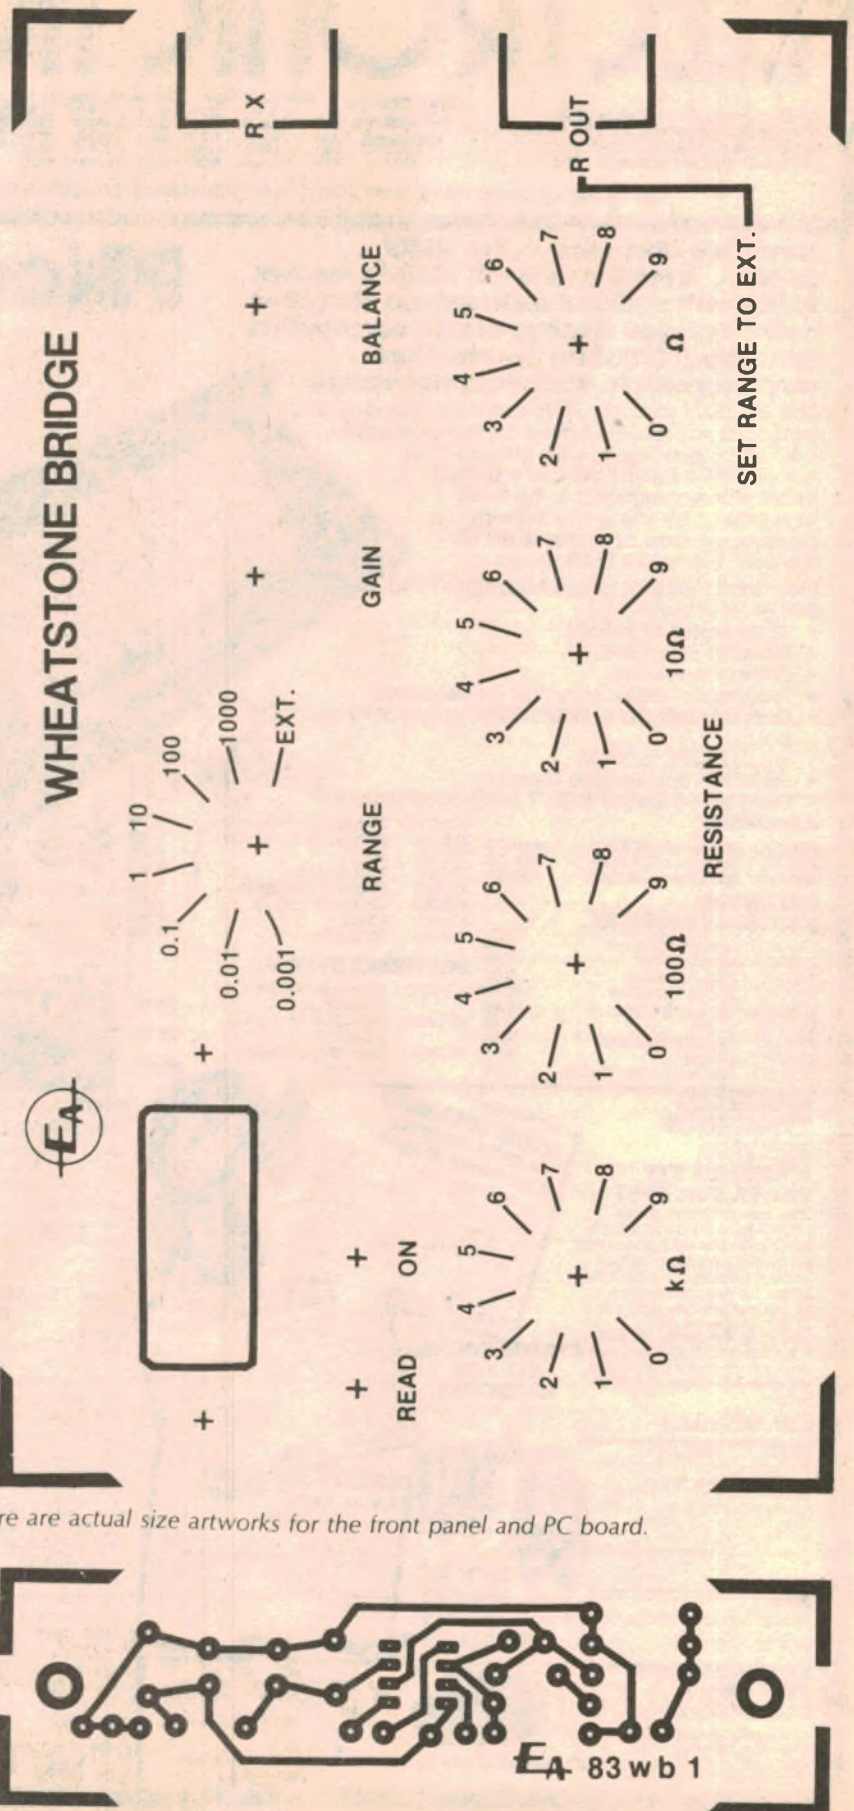

Here are actual size artworks for the front panel and PC board.

# Experience the thrill of building your own speaker system

## & SAVE!

### with the NEW Playmaster Speaker Kits

Dick Smith brings you two superbly styled speaker systems to suit your room, your decor – and your pocket!

They feature a completely new format and appearance, starting with the strikingly handsome new grilles, featuring the new 'Playmaster' logo.

#### look at these features:

- All-new design in attractive woodgrain finish. They'll complement any decor!
- Separate level controls for high and mid ranges: tailor the sound to suit the listening environment.
- Special speaker sealant material supplied to ensure absolute air tightness.
- New design ribbed woofer with massive 30cm cone for accurate bass reproduction.
- Built-in plinth to raise the speaker off the floor level for minimum audio colouration.
- Manufactured to the exacting standards of the original design published in Electronics Australia magazine.
- Fully imported contoured grilles that simply push into place on special clips: no more grille rattle or movement.
- Acoustically transparent silk-like grille cloth, heat welded to support frame. All the hard work is done for you already!
- Your choice of two different sizes: 300mm and 250mm systems.

**FROM \$333 A PAIR**

Designed by:  
Neville Williams MIREE (Aust)  
Editor-in-Chief,  
Electronics Australia

#### & see how easy they are to build!

It's so easy – all it takes is a couple of hours of construction time – and you save a fortune on comparable built up speakers. And as the photo above proves, they're as good looking as any speakers you'll find in the hi-fi showrooms. And just imagine being able to say... 'I built them myself!'

#### SAVE \$100 ON EQUIVALENT SYSTEMS!

##### 250mm SPEAKER SYSTEM

250mm Speaker Grille (C-2610) \$35.90  
250mm Enclosure Kit (C-2634) \$148.10  
250mm Speaker Kit (C-2044) \$149.00

Complete 250mm Kit **\$333**  
per pair

##### 300mm SPEAKER SYSTEM

300mm Speaker Grille (C-2612) \$39.90  
300mm Enclosure Kit (C-2632) \$165.10  
300mm Speaker Kit (C-2042) \$155.00

Complete 300mm Kit **\$360**  
per pair



**THIS AMAZING VALUE ONLY FROM**

# DICK SMITH Electronics

SEE PAGE 98 FOR ADDRESS DETAILS



A416M/LM



# Wheatstone Bridge

**TABLE 1**

Multiplier settings for maximum accuracy.

RX	OHM/STEP	MULTIPLIER
Below 9.999Ω	0.001	× 0.001
10 – 99.99Ω	0.01	× 0.01
100 – 999.9Ω	0.1	× 0.1
1k – 9.999kΩ	1.0	× 1.0
10k – 99.99kΩ	10	× 10
100k – 999.9kΩ	100	× 100
1M – 9.999MΩ	1000	× 1000

**TABLE 2**

How incorrect multiplier settings decrease read-out accuracy.

$RX = 1.394 - \text{Recommended Multiplier} \times 0.001$ .

× 0.001	1.394	4 Significant Figures
× 0.01	1.39	3 Significant Figures
× 0.1	1.4	2 Significant Figures
× 1	1.0	1 Significant Figure

to be indicated by bands one, two and three. Band four, which is the multiplier, therefore has one extra digit to its left. This means that a red band seen here gives a value 10 times higher than you might expect from your previous experience with RMA coded resistors (normal 5, 10 and 20% types). To eliminate this troublesome extra zero we drop downwards one multiplier colour, ie yellow becomes orange, orange becomes red etc. The actual colour code is not changed but it is the extra significant figure which upsets the apple-cart.

If all this leaves you feeling confused, here are the colour bands which will be on each of the resistors: S2, 1kΩ (1%) – Brown, Black, Black, Brown, Brown; S3, 100Ω(1%) – Brown, Black, Black, Black, Brown; S4, 10Ω(1%) – Brown, Black, Black, Gold, Brown and S5, 1Ω (2%) – Brown, Black, Gold, Red. This should help to clarify the position. It is actually quite logical, but the knowledge of the old code throws you!

## Check out and testing

If everything appears satisfactory, set the mechanical zero on centre scale – your meter may or may not make provision for this – connect up the batteries and switch on. With the gain control at minimum a small deflection may be seen, reducing to zero with correct setting of the "balance" control. Advance the gain control and check the setting at several points, noting as you go that increased gain means more critical zero setting. It follows therefore that you should use the lowest gain giving you a reasonable deflection, stability and drift then being excellent. The instrument is now ready for use, no further calibration

being required.

Connect a resistor of known value to RX terminals, and switch on. Check zero set and advance the gain control to say, 9 o'clock. Set the multiplier to the range appropriate for the test piece, as found from Table 1 at the top of the page. It obviously helps if the approximate value is known, as a certain amount of blind fumbling (commonly referred to as trial and error) can thus be avoided.

Depress the "read" button and vary the decade knobs, working from left to right until the meter reads zero. While working towards this zero condition the "kΩ" knob (S2) is set to give a reading on the left or low side of the scale, the "100Ω" knob (S3) is set to give a closer reading on the same side of the scale, and the final balance adjustments made on the "10Ω" knob and then finally on the 1Ω knob.

You should now be able to read, from left to right, a four figure dial number such as 1 2 3 4 which combines with the multiplier setting to give the result, merely adding zeros or positioning a decimal point as may be required, eg:

$$1234 \times 100 = 123400 \\ = 123,400\Omega \text{ or} \\ 123.4k\Omega.$$

The gain control can be advanced to increase sensitivity as the final balance point is approached, or if high values of RX are being determined. Having successfully completed this preliminary canter over the course with a known value, try your hand with a few unknown values and get the feel of the instrument.

Table 1 is a list of multiplier settings for maximum accuracy. Table 2 demonstrates how incorrect multiplier settings decrease the number of significant figures in a measurement. ☺

## PARTS LIST

- 1 3-way tag strip
- 7 knobs to suit
- 4 terminal posts, two red, two black
- 1 200-0-200μA centre-zero meter
- 1 plastic utility box, 196 x 113 x 60mm
- 1 Scotchcal front panel
- 1 printed circuit board, code 82wb12, 106 x 28mm
- 2 9V type 216 batteries with snap connectors
- 1 D-size 1.5V cell with holder
- 4 rubber feet

### SEMICONDUCTORS

- 1 LF351, CA3140, TL061 operational amplifier
- 2 OA90 germanium diodes

### CAPACITORS

- 2 100μF/10VW electrolytic
- 1 4.7μF/10VW non-polarised electrolytic
- 2 0.1μF metallised polyester (greencap)

### RESISTORS (¼W, 1% metal film unless noted)

- 2 x 100kΩ, 3 x 10kΩ, 13 x 1kΩ, 11 x 100Ω, 9 x 10Ω, 1 x 47Ω 5% ½W cracked carbon, 9 x 1Ω ¼W (lowest tolerance available), 1 x 500kΩ log potentiometer, 1 x 50kΩ linear potentiometer

### SWITCHES

- 4 single-pole 12-position rotary switches
- 1 2-pole 8-position rotary switch
- 1 SPST momentary contact push button
- 1 DPST on/off switch

### MISCELLANEOUS

- Scrap aluminium (95 x 15mm), machine screws and nuts, rainbow cable etc.

## FUNDAMENTLS OF SOLID STATE

Fundamentals of Solid State is in its second reprinting, showing how popular it has been. It provides a wealth of information on semiconductor theory and operation, delving much deeper than very elementary works, but without the maths and abstract theory which make many of the more specialised texts very heavy going. 'Solid State' has also been widely acclaimed in colleges as recommended reading – but it's not just for the student. It's for anyone who wants to know just a little bit more about the operation of semiconductor devices.

Available from "Electronics Australia", 57 Regent St, Chippendale. PRICE: \$3.50 OR by mail order from "Electronics Australia", PO Box 163, Chippendale 2008. PRICE: \$4.40.

# GET INTO ELECTRONICS FOR \$4.95



**OVER 30,000 SOLD!**



## WITH DICK SMITH'S FUNWAY INTO ELECTRONICS

This is the top selling Fun Way Into Electronics Vol. 1 that has proven that electronics can be fun. For the raw beginner, this book introduces 20 exciting projects that can be built by using a unique 'breadboard' construction system - no soldering, so it's safe. Each project is fully illustrated so that mistakes are virtually impossible. This top-selling book is now into its fourth printing proving just how popular it has been. Don't miss out!

**ONLY \$4.95**  
Cat B-2600

## Vol 1 KITS

Kit to build projects 1-10

You can build any of the first ten projects from 'Fun Way Into Electronics' with this kit. It even includes the base board on which you assemble the circuits! Cat K-2600

**\$7.25**

Kit to build projects 11-20

This kit contains the slightly more specialised components which, together with the components from kit 1, will enable you to make any of the projects in the book.

**\$7.90**  
Cat K-2610



## PARENTS PLEASE NOTE

All Fun Way Into Electronics kits are battery powered so they are completely safe. Also, Fun Way Vol. 1 kits require no soldering.

## FUNWAY VOL. 2 20 MORE PROJECTS

After mastering Fun Way Vol. 1 what better way to go than Vol. 2. In Vol. 2 you are introduced to printed circuit boards and soldering. Both are fully explained and illustrated and they give you the choice of making your own boards or buying ready made. The basic laws of electronics, plus chapters on component codes, assembly hints etc. are fully explained.

**\$6.95**  
Cat. B-2605

## FUNWAY VOL 2 KITS FROM \$2.95

### MULTI-PURPOSE LED FLASHER . . . \$2.95

A really simple kit that can be used as a warning device, electronic jewellery, etc. Cat K-2621

### DING DONG DOORBELL \$4.50

Welcome visitors to your home with this integrated circuit doorbell! Cat K-2622

### MORSE CODE TRAINER \$4.50

This simple oscillator circuit lets you learn Morse code the easy way! Cat K-2623

### UNIVERSAL TIMER \$5.50

Use it as an egg timer, a dark-room timer, etc. In fact, it's got a lot of applications! Cat K-2624

### ELECTRONIC DICE \$4.95

Throwing a dice is old hat, do it electronically! Simple circuit has other uses too. Cat K-2625

### MONOPHONIC ORGAN \$7.95

Easy to build, and easy to play! And it even has 'vibrato' - just like the big ones! Cat K-2626

### POCKET TRANSISTOR RADIO \$7.95

Simple to build, and it's nice and small! Listening is so much more fun! Cat K-2627

### TOUCH SWITCH \$5.50

One touch on, next touch off - or on while touched! Dozens of uses in the home! Cat K-2628

### MOSQUITO REPELLER \$4.95

Don't get eaten by mozzies scare them away electronically. Take it anywhere! Cat K-2629

### SIMPLE AMPLIFIER \$6.50

A useful little amplifier for all those projects needing audio amplification! Cat K-2630

### WIRELESS MIC. \$6.50

A tiny transmitter that can be received on any FM receiver. A great little kit! Cat K-2631

### LIGHT ACTIVATED SWITCH \$5.50

Highly useful for alarms, night light switches, etc. etc. Sensitive and reliable. Cat K-2632

### METAL/PIPE LOCATOR \$6.50

A simple BFO circuit you can use to find metals, pipes, wiring, etc. - maybe gold! Cat K-2633

### SOUND ACTIVATED SWITCH \$6.95

Picks up sound waves and trips a relay. Use as a telephone bell extender, too. Cat K-2634

### HOME/CAR BURGLAR ALARM \$6.50

Learn how burglar alarms work when you install your own! For home or car. Cat K-2635

### ELECTRONIC SIREN \$4.95

Great for alarm use - or where any warning is required. Good for kids toys, too! Cat K-2636

### LED LEVEL DISPLAY \$8.95

This fascinating project shows you the audio level of any amplifier. Cat K-2637

### INTERCOM UNIT \$8.95

Communicate! Build this intercom and talk between rooms, etc. Cat K-2638

### LED COUNTER MODULE \$7.95

Learn how digital circuits work by building a counter. Count slot car laps, etc. Cat K-2639

### SHORTWAVE RECEIVER \$8.95

Listen in to the exciting world of shortwave radio: amateurs, foreign countries! Cat K-2640

**SCHOOLS, RE-SELLERS, ETC.:**  
We'll negotiate a special price for bulk quantities on either books or kits, or both!

# DICK SMITH ELECTRONICS

SEE PAGE 98 FOR ADDRESS DETAILS



A383/CT



# ROD IRVING ELECTRONICS


425 HIGH STREET, NORTHCOTE 3070, MELBOURNE, VICTORIA. Ph (03) 489 8131. Telex No. 38897

MIXER PREAMP  
TRANSFORMER **\$26.50**



Easy construction and versatile operation. This Preamp was for coupling with the 300W "Brute" Power Amp. ETI 467 July 80

AUDIO TEST UNIT FOR CASS  
DECKS **\$47.50**

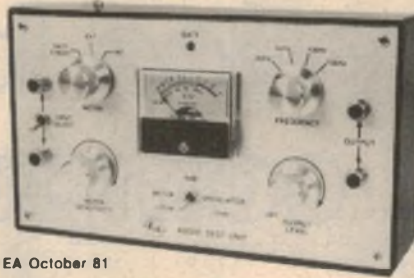


EA October 81

CRYSTAL MARKER **\$34.50**  
(INC 1MHZ X) ETI 157 October 81




TV PATTERN GENERATOR  
**\$57.50**

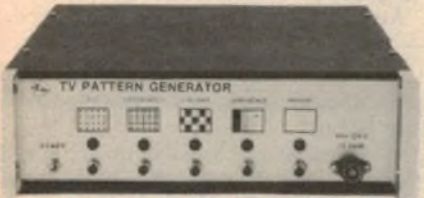


Adjust your TV for a first-class picture with EAs crystal controlled TV Pattern Generator EA June 80

BIPOLAR TRAIN CONTROLLER  
**\$28.50**

EA December 80

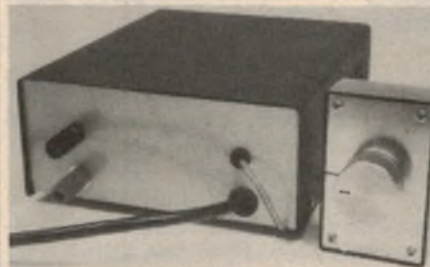

SLOT CAR POWER  
CONTROLLER  
(WITHOUT CASE) **\$70.00**



ETIs Slot Car Controllers will put more zip in your slot cars zap. Plus Power Supply as indicated. ETI December 81.

ETI 477 MOSFET  
MODULE **\$58.50**




Remember the great ETI 5000 power amp. With this module as the hub of the ETI 5000 and a transformer you get an amazing power output of 150W RMS  
Plus Power Supply (No Trans) **\$49.00**  
Plus Transformer **\$39.50**

PC BIRDIES **\$14.50**



Granny's Birthday - PC Birdies  
Granny's got a birthday coming up and you don't know what to give her! Her cat ran away, her dog starved and the fish turned upside down. Well here's the perfect gift. A nonsense, no maintenance companion The PC Birdies - She'll whistle, sing and dance for hours to this amazing electronic canary EA May 81

DIGITAL COUNTER DISPLAY  
HE 114 HOBBY ELECTRONICS **\$13.50**  
October 81

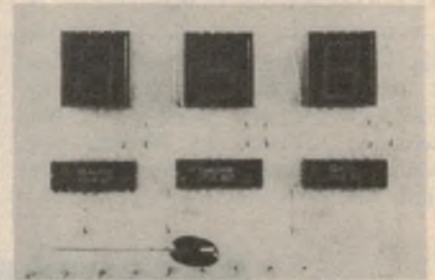

TRANSISTOR ASSISTED  
IGNITION **\$32.50**  
EA November 79




WIND  
SPEED  
INDICATOR **\$43.50**  
October 81




ETI 50W MODULE **\$17.50**  
ETI 100W POWER  
AMP **\$22.00**  
VERSATILE EPROM  
CARD **\$115.00**  
MOVING COIL  
PREAMP **\$24.50**  
MOVING MAGNET  
PREAMP **18.50**  
DREAM 6800 **\$109.00**  
445 STEREO PREAMP **\$8.25**

MUSICOLOR IV **\$79.00**

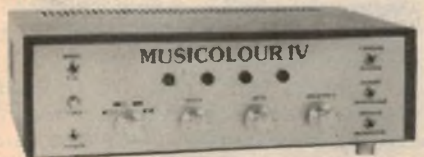

Add excitement to parties, card nights and discos with EAs new Musicolor IV light show. This is the latest in the famous line of Musicolors and it offers features such as four channel "Color Organ" plus four channel light chaser, front panel LED display, internal microphone, single sensitivity control plus opto-coupled switching for increased safety EA August 81

ETI SERIES 5000

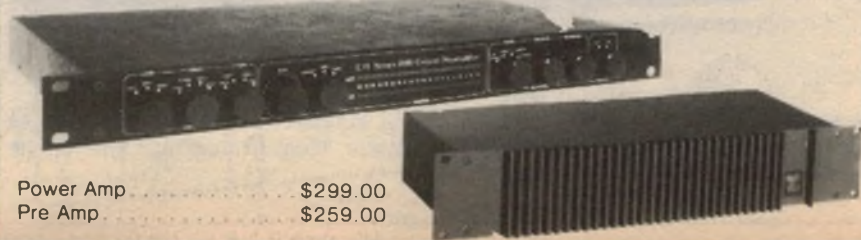

Power Amp ..... **\$299.00**  
Pre Amp ..... **\$259.00**

# The MicroBee low cost personal computer

A revised version of the Applied Technology Microbee computer has just been released and is now available from selected retailers throughout Australia. A feature of the new computer is an extensive array of software available in EPROM.

by PETER VERNON

Our first impression of the Microbee was that it was a compact, neatly presented unit. The case is moulded in white and grey plastic, with overall dimensions of 350 x 230 x 58mm (W x D x H) – not much bigger than some machines being promoted as “hand-held” computers. It would fit nicely in a briefcase, with room to spare.

### Keyboard and video

The Microbee keyboard has 60 full-travel keys, again in grey and white, and is acceptable, if nothing fancy. Undoubtedly it is well suited for the hobbyist or occasional user, although it remains to be seen how the switch contacts hold up under extensive use in a

word processing application, for example. At high typing speeds the keyboard produces a rattling sound which may be disturbing to bystanders.

The keyboard is normally in a typewriter mode, generating lower case characters, with upper case accessed by the Shift key. Pressing “Lock” however, reverses this format for alphabetic characters only. In this mode upper case letters are generated with lower case produced by Shift. This arrangement is very convenient for program entry, and an unexpected bonus in a low-cost system.

The video display is a rock steady 64 x 16 lines, and the 6545 programmable video generator can be programmed for other formats, such as 40 x 24, or 80 x

24, although no details of how to do this are given.

Characters are formed in an 8 x 16 block, rather than the more usual 8 x 8 pixels. The resulting characters are tall and narrow. Because of the design of the character set there is almost no horizontal separation between some adjacent characters, making the screen hard to read at times.

On the plus side, the character set has true descenders and has no “vertical compromises” to give these descenders. This is probably one of the reasons that the Microbee was approved for use in schools by the NSW Education Department.

In addition to upper and lower case alphanumeric characters the Microbee has four display modes; underline, inverse, low resolution graphics and high resolution graphics. Low resolution is 128 x 48 pixels and can be mixed indiscriminately with text. High resolution is 512 x 256 pixels and can be mixed with text with some restrictions. Activating the high resolution mode clears the screen, but alphanumeric characters can be printed after the completion of a high resolution drawing.

Inverse and underline characters are mutually exclusive – the display can be either one or the other. These two attributes are not available on a character-by-character basis – typing “UNDERLINE” for example, means that every character is displayed with an underline until the display is restored by typing “NORMAL”.

When none of the graphics or character attribute modes are in use the programmer can access 128 programmable character blocks held in RAM to create unique graphics patterns or alternate character sets. It is these programmable blocks which are used to create the high resolution graphics, and this approach does have some limitations.



The Applied Technology MicroBee computer is supplied with a 12VAC plugpack power supply, manual and demonstration cassette. Plugs at front are for cassette recorder.



A program incorporated in the Basic Interpreter determines which pixels of the character cell need to be illuminated and where the character must be placed on the screen to create the display required. The same program keeps track of how many of the 128 programmable characters have been used and which of these can be over-written as more of the screen is filled.

As long as displays are confined to vertical and horizontal lines this method works well. Diagonal lines exhaust memory space more quickly, and circular patterns or complex, full screen graphics are not possible.

### Internal details

Opening up the MicroBee reveals two circuit boards, the upper containing a mixture of RAM and ROM and the lower carrying the Z80 microprocessor, video display circuitry, cassette interface, tone generator, keyboard and interface connectors.

A standard Microbee has 16K of programmable memory, with room for on-board expansion to 32K. The other half of the memory board has space for up to 28K of ROM. MicroWorld Basic occupies 16K, with the remaining space available for utilities such as an editor/assembler, network communications program or a word processing package. Our review machine contained the word processor (of which more later).

A feature of the Microbee is its use of CMOS memory which draws very little current. A 4.5V camera battery provides sufficient power to allow the memory to be maintained on standby while the mains supply is off. The program in memory is retained, whether the user wants it or not.

An RS-232C interface is provided for connection of a printer or other serial device. Two other openings at the rear of the case provide access to the circuit board, which is pre-drilled to allow addition of an expansion connector for the Z80 bus and parallel interface circuitry. A parallel port can be added by installing a 25-pin D-type connector and a single integrated circuit.

One of the reasons why the Microbee is so compact is that it has an external power supply in the form of a 12VAC plugpack. This feeds rectifiers, filters and three 5V regulators in the Microbee. As such, this arrangement could be improved upon. For a start, the plugpack voltage of 12VAC means that a relatively high DC voltage is fed to the regulators, leading to higher than necessary power dissipation in the case.



High resolution (512 x 256) graphics displays can be over-printed with text as shown here. The incomplete design results when all programmable characters have been used.

And it would seem that when the Microbee is fully optioned up, the power supply is not quite up to the task. While some owners have gone to the trouble of building a more rugged external supply it would seem that these problems could be overcome by providing a plugpack with a lower output voltage and a higher current rating, ie, with the same overall power rating.

Power is supplied to the Microbee from the 12VAC plugpack with a 5-pin DIN connector. The same connector is also used for the cassette interface connections and direct video output. There is no RF modulator, so attempting to connect the computer to a standard television set is doomed to failure.

The manual accompanying the machine makes no mention of the need

for a direct entry video monitor. In the same fashion it is not until page 124 of the 144 page booklet that instructions are given for connecting a cassette recorder – and even then the manual refers to a red plug which is actually grey. Considering that a demonstration tape intended for classroom use was included with the computer, this is a serious failing.

All in all, the manuals supplied with the Microbee suffer from the common failing of those written by someone too close to the subject. Features not commonly used are treated in loving detail while vital information for the beginner is either glossed over or missing entirely. At the time of this review an extensive re-writing of the manuals was underway, so these comments may not be ap-

## MicroBee specifications

Processor: Z80

RAM: 16K, expandable on-board to 32K, with battery back-up

ROM: 16K, expandable on-board to 28K

Interfaces: RS232C serial port, optional parallel port and S-100 expansion.

Keyboard: 60 keys including spacebar, typewriter style

Display: 64 x 16 upper and lower case, underline and inverse video modes

Graphics: High resolution, 512 x 256 using programmable characters Low resolution 128 x 48

128 programmable characters, 8 x 16 pixel matrix

Sound: 25 tones with duration in increments of 1/8 second.

Expansion: 64K memory version, S-100 interface, disk drives Editor/Assembler, word processor and network communications software is available in ROM

Documentation: Incomplete at time of writing.

# The MicroBee: a low-cost personal computer

plicable to the final versions of the manuals.

## Basic programming

Microworld Basic, supplied with the Microbee has a strong resemblance to the Basic of the Super-80. This is not surprising since both are based on Basic ETC, originally supplied by East Texas Computers and written by John Arnold and Dick Whipple, the co-developers of the original Tiny Basic.

Microworld Basic shows its Tiny Basic heritage, particularly in the use of single letter variable names and restrictions on mixing variables of different types.

Perhaps the most confusing point for new users of Microworld Basic is the restriction on variable names. There are a number of rules which must be observed.

Firstly the type of variable is indicated by its name. A numeric variable is represented either by a single letter, for integer values or a letter followed by a number between 0 and 7 for real number values. A string variable consists of a letter, a number from 0 to 7 and a \$ sign. Variables are distinguished by the first letter part of the name, so A0 and A0\$ cannot both be used in the same program as Basic will not recognise them as different variables.

Mixing integer and real variables in the same expression will result in an error

Microsoft. In many ways the Microworld string statements are more flexible, and are certainly more consistent in format. A single reference to a string of characters combined with the appropriate parameters can do the same duty as Microsoft's LEFT\$, RIGHT\$ and MID\$.

```
For example the following program
reproduces all three functions;
10 A1$="ABCDEFGH"
20 PRINT A1$(;1,N):REM PRINT THE
FIRST N CHARACTERS OF A1$
30 PRINT A1$[:LEN(A1$)-N+1,
LEN(A1$)]:REM PRINT THE LAST
N CHARACTERS
40 PRINT A1$(;N,M):REM PRINT THE
CHARACTERS FROM POSITION N TO
POSITION M
```

Also unusual is the presence of a SEARCH statement. This statement searches a designated string for the occurrence of a specified substring, and returns the position at which the substring is found (or zero if the search is unsuccessful). An example will make this clearer;

```
A0$="ABCDEF"
PRINT SEARCH (A0$,"DEF")
```

This example will return 4, the position of the start of the substring "DEF".

On a more general basis, the command GX activates a global search and

input and output. Basic statements are provided to allow output that would normally be displayed on screen to be sent to a printer, cassette recorder or RS-232C device such as a modem. Input data can similarly be taken from the keyboard, cassette recorder or the RS232C interface.

Activating a printer connected to the parallel port is simply a matter of typing; OUT#1 ON

Cassette operation can be at one of two speeds, either 300 baud or 1200 baud, and file names can be up to six characters long. All file names are displayed as the Microbee searches the cassette tape and a LOAD? command is provided which allows a program on tape to be compared with a program in memory. Given this array of cassette operating facilities it is unfortunate that no provision has been made for direct computer control of the cassette recorder.

Automatic line numbering is provided by the AUTO command, and programs can also be re-numbered on command. In combination with the ability to accept input from the cassette recorder as if it was typed from the keyboard this facility allows a program on tape to be merged with a program held in memory.

## Graphics abilities

MicroWorld Basic provides an extensive series of statements to make use of the graphics capabilities of the computer. The PLOT statement, available in either high or low resolution allows lines to be drawn on the screen by specifying the start and end points. Lines can also be erased with PLOT R, or inverted by adding "I" to the statement.

Inversion, in this sense, means that any points on the line which are illuminated will be erased while points which are currently off will be turned on. The SET statement allows individual points to be turned on; RESET is provided to erase a point. An "H" following the SET statement will place the origin of the graphics co-ordinates at the top left hand corner of the screen rather than its usual position at the bottom left.

While the graphics capabilities are extensive and the high resolution mode impressive, a considerable amount of screen flicker is evident while these statements are being executed. Apparently no attempt has been made to synchronise memory accesses by the CPU and the video display generator.

The result is that the CPU updates memory at the same time as the display generator is attempting to read the current contents for display, and the conflict causes a series of black lines on the

## MicroWorld Basic statements and functions

ABS ASC ATAN AUTO CHR\$ CLEAR CLS CONT COS CURS DATA  
DELETE DIM EDIT END ERRORC ERRORL EXEC EXP FLT FOR . . TO  
FRACT FRE GOSUB GOTO GX HIRES IF . . THEN IN IN# INPUT INT IN-  
VERSE KEY\$ LEN LET LIST LLIST LOAD LOG LORES LPRINT NEW NEXT  
NORMAL ON ERROR ON . . GOSUB ON . . GOTO OUT OUT# outL outL#  
PCG PEEK PLAY PLOT POINT POKE POS PRINT PRMT READ REM  
RENUM RESET RESTORE RETURN RND RUN SAVE SD SEARCH SET  
SGN SIN SPC SPEED SQR STEP STOP STR STRS TAB TRACE  
UNDERLINE USED USR VAL VAR ZONE

message. The Statements PRINT A1 + B or PRINT C + D0 will cause this error because of the combination of integer and real variables.

This peculiarity has more subtle effects as well. The following program;

```
10 A=3
20 PRINT A/2
```

will return 1, not 1.5. Division of an integer always returns an integer result.

Two statements are provided to get around the problem. INT converts a real value into the next lowest integer, while FLT does the reverse, converting an integer into real number format so that it can be combined with other real number values.

String handling is another major difference between Microworld Basic and

replace function which will locate a specified series of characters and replace them with another set of characters. It is an editing command, and very useful for correcting errors which occur throughout a program.

Although similar to Super-80 Basic, MicroWorld Basic is more extensive, as indicated by the additional 4K of ROM required to contain it (Super-80 Basic is a 12K version). MicroWorld Basic adds extensive error handling statements, including ON ERROR GOTO and ERRORL (which returns the line number at which the last error occurred). Error messages are explanatory text, rather than cryptic code numbers, and an arrow is displayed at the approximate position of the error.

Another valuable feature of this version of Basic is the capability to re-direct

# The MicroBee low cost personal computer

screen as graphics statements are carried out. The Microbee is excellent for generating static pictures, but any attempt at animated scenes is likely to cause disappointment.

Limited sound capabilities are also provided by the Microbee. The PLAY statement will sound one or more notes from an internal speaker, with a duration specified in increments of  $\frac{1}{8}$  second. Twenty-five possible notes can be generated, covering a frequency range of 220Hz to 831Hz (almost two octaves).

Sounds are produced directly by the microprocessor, interrupting the execution of other program statements for the duration of the sound.

There have been reports of "bugs" in MicroWorld Basic, possibly as a result of the continuous memory feature. Even a cold start does not clear out memory, and bad values can remain from a program gone awry. This results in mysterious errors which show up when a program is listed, and remain in spite of attempts to correct the offending line.

Perhaps some of these problems could be solved by adding a switch to disconnect the battery backup and thus ensure a truly cold start.

Representatives at Applied Technology stated that investigations into these problems are continuing, and that any Basic bugs will be corrected.

## Wordprocessing on the MicroBee


The version of the MicroBee reviewed here was supplied with word processing software built in. Called "WordBee", this the program is contained in a set of ROM chips and when combined with the battery back-up for the MicroBee's memory produces a very powerful and unusual word processing system.

It should be noted that the version of WordBee we received was a sample only, and the program was not then advertised by Applied Technology. This aside, "WordBee" shows great promise.

The author of the program and the preliminary manual which accompanied it makes no secret of the fact that WordBee has features of several of the most popular word processing systems, with screen formatting and menu displays reminiscent of "Electric Pencil" (tm), a "Help" command as in "Word Master" (tm) and dot commands embedded in the text for printer control as in "Word-Star" (tm).

Whatever the inspiration, however, WordBee is an impressive program. It is menu-driven, with extensive prompts and operating guides available at any time.

Because it is ROM, co-resident with

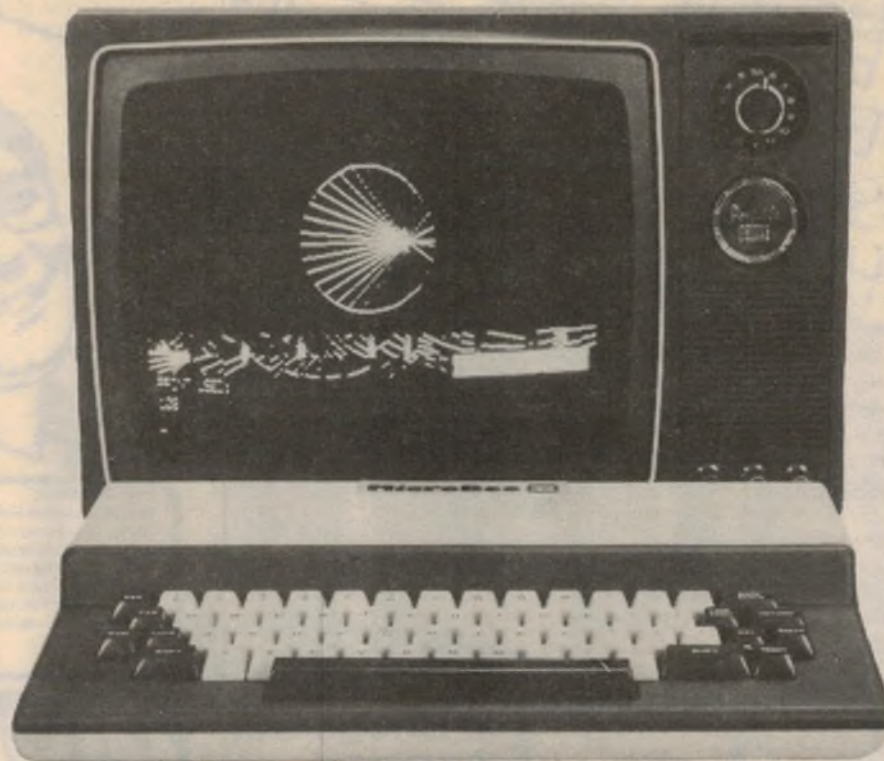

High resolution display which also shows the programmable characters that have been used to build up the design. White areas are inverse video characters.

MicroBee's Basic, the word processing program is available for use at any time. Battery-powered memory means that word processor files can be retained even when the power is switched off. The result is a word processor that can be used anywhere a video monitor is available. Files can be entered into memory and edited and then printed out at a later date.

WordBee is entered from Basic by typing "EDASM" — apparently this command accesses the ROM address space, and the first program to be supplied for this space by Allied Technology was an Editor/Assembler. On entry the first menu is displayed and the MicroBee is in the "interface" mode. This mode is used for switching between control menus and text, saving and loading files from tape and checking file status.

A nice feature is the word count function which returns the number of words in the text file. File status can also be found, returning the position of the cursor in the file, the total length of the file in characters, the number of characters which can be added to the file remaining memory space and total memory space (30462 bytes in a 32K system).

Automatic word wraparound at the end of each line is provided, as is auto key repeat.

Using the editing functions is fairly easy, although few of the single letter Control commands bear any relationship

to the actions they invoke. Control-E for example, moves the cursor up one line, while Control-U is not currently used. Control-B activates the block mode, while Control-C scrolls the file towards the beginning. Control-D moves the cursor left, while again Control-L is not used. All in all, 22 Control-key commands are provided.


The Block command (Control-B) and the Find function (Control-F) activate their own sub-menus, which in the first case allows the user to copy, delete and move marked blocks of text around in a document, and in the second allows specified words to be searched for and, optionally, replaced, either on a continuous or case-by-case basis.

Print formatting commands are equally extensive. Printer control functions are indicated by "dot" commands embedded in the text. Functions available include justification, double spacing, line and page length specifications, and page headers. The user can also specify whether a line feed is to be sent after a carriage return, the number of line feeds to be sent at the end of a page and Escape code sequences to control special features of a particular printer.

As supplied, WordBee is set up to use an Epson MX80 or equivalent printer with a serial interface. Neither the Microworld Basic manual or the

*continued on p.108*

ENJOY THE  
BENEFITS OF DICK  
SMITH SHOPPING IN THE  
HEART OF SYDNEY

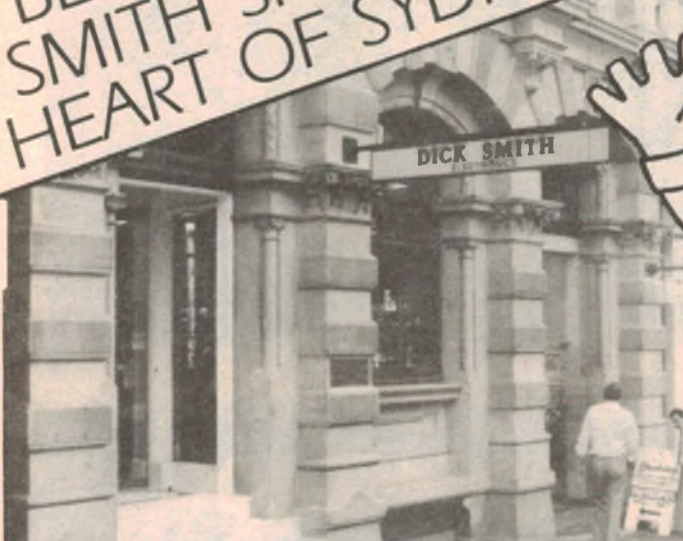

Terms available to approved applicants through... **HFC**

**Dear Customers,**  
Quite often the products we advertise are so popular they run out within a few days. Or unforeseen circumstances might hold up shipments so that advertised lines are not in the stores by the time the advert appears. And very occasionally, an error might slip through our checks and appear in the advert (after all, we're human too!). Please don't blame the store manager or staff, they cannot solve a dock strike on the other side of the world, or fix an error that's appeared in print. If you're about to drive across town to pick up an advertised line, why not play it safe and give the store a call first... just in case. Thanks.

**Dick Smith and Staff**



**6 Bridge St.,  
SYDNEY.**  
Tel: 27 5051

**STORE LOCATIONS**

NSW 145 Parramatta Rd	AUBURN	648 0558
T55 Terrace Level	BANKST. SQ.	707 4888
613 Princes Hwy	BLAKEHURST	546 7744
552 Oxford St	BONDI JCT.	387 1444
818 George St	BROADWAY	211 3777
531 Pittwater Rd	BROOKVALE	93 0441
147 Hume Hwy	CHULLORA	642 8922
162 Pacific Hwy	GORE HILL	439 5311
Elizabeth Dr & Bathurst St	LIVERPOOL	600 9888
396 Lane Cove Rd	NORTH RYDE	888 3200
George & Smith Sts	PARRAMATTA	689 2188
6 Bridge St	SYDNEY	27 5051
125 York St	SYDNEY	290 3377
Tamworth Acde & Kable Ave	TAMWORTH	66 1961
173 Maitland Rd	TIGHES HILL	61 1896
263 Keira St	WOLLONGONG	28 3800
ACT 96 Gladstone St	FYSHWICK	80 4944
VIC 260 Sydney Rd	COBURG	383 4455
Ross Smith Av & Nepean Hwy	FRANKSTON	783 9144
205 Melbourne Rd	GEELONG	78 6766
399 Lonsdale St	MELBOURNE	67 9834
Bridge Rd & Coronation Blvd	RICHMOND	428 1614
Springvale & Dandenong Rds	SPRINGVALE	547 0522
QLD 293 Adelaide St	BRISBANE	229 9377
166 Logan Rd	BURANDA	391 6233
Gympie Rd & Hamilton St	CHERMSIDE	59 6255
SA 60 Wright St	ADELAIDE	212 1962
Main South & Flagstaff Rds	DARLINGTON	298 8977
435 Main North Rd	ENFIELD	260 6088
WA Wharf St & Albany Hwy	CANNINGTON	451 8666
414 William St	PERTH	328 6944
Hay St(The Centre Way Acde)	PERTH	321 4357
TAS 25 Barrack St	HOBART	31 0800

**DICK SMITH  
Electronics**

**MAIL ORDER CENTRE**  
PO BOX 321, NORTH RYDE NSW 2113  
Telephone orders: (02) 888 3200

**POST & PACKING CHARGES**

ORDER VALUE	CHARGE	ORDER VALUE	CHARGE
\$5.00-\$9.99	\$1.40	\$50.00-\$99.00	\$4.60
\$10.00-\$24.99	\$2.40	\$100.00 or more	\$6.20
\$25.00-\$49.99	\$3.50		

Charges are for goods sent by post in Australia only — not airmail, overseas or road freight

**SPEEDY  
PHONE/BANKCARD  
ORDER SERVICE**

Just phone through your order and Bankcard details — it's so simple!  
**(02) 888 3200**



**MAJOR RESELLERS**

These are our major resellers. However, we cannot guarantee they will have advertised items in stock or at the prices advertised.

Atherton QLD: Jue Sue's Radio Service 55 Main St 91 1208 ● Bendigo VIC: Sumner Electronics, 7 Edward St 43 1977 ● Belina NSW: A. Cummings & Co 91-93 River St 86 2285 ● Cairns QLD: Thompson Instrument Services 79-81 McLeod St 51 2404 ● CoFfs Harbour NSW: CoFfs Harbour Electronics, 3 CoFfs Plaza, Park Ave 52 5684 ● Darwin NT: Kent Electronics, 42 Stuart Hwy 81 4749 ● Darwin NT: Ventronics, 24-26 Kavanagh St ● Deniliquin NSW: Dani Electronics, 220 Cressy St 81 3672 ● East Maitland NSW: East Maitland Electronics, Cnr. Laws & High Sts 33 7327 ● Echuca VIC: Webster Electronics, 220 Pakenham St ● Geraldton WA: KB Electronics & Marine 361 Main Terrace 21 2176 ● Gladstone QLD: Purely Electronics, Shop 2, Cnr. Herbert & Auckland Sts 72 4321 ● Geelong NSW: Tomorrow's Electronics & Hi-Fi, 68 William St 24 7246 ● Kingston TAS: Kingston Electronics, Channel Court 29 6802 ● Launceston TAS: Advanced Electronics, 5a The Quadrant 31 7075 ● Lismore NSW: Dacro Electric, 3A/6-18 Carrington St ● Mackay QLD: Stevens Electronics, 42 Victoria St 51 1723 ● Maryborough QLD: Keller Electronics, 218 Adelaide St 21 4559 ● Mt Gambier SA: Hutcheson's Comm. 5 Elizabeth St 25 6404 ● Mildura VIC: McWilliam Electronics, 40 Lemon Ave. 23 6410 ● Morwell VIC: Morwell Electronics, 128 George St 34 6133 ● Nambour QLD: Nambour Electronics, Shop 4, Lowan House Ann St 41 1604 ● Orange NSW: M&W Electronics, 173 Sumner St 62 6491 ● Penrith NSW: Acorn Electronics, Shop 12, 541 High St 36 1466 ● Port Macquarie NSW: Hall Of Electronics, 113 Horton St 837 440 ● Rockhampton QLD: Purely Electronics, 15 East St 21 058 ● Shepparton VIC: G.V. Electronics Centre, 189b Corio St 21 8866 ● Southport QLD: Amateurs Paradise, 121 Nerang St 32 26 44 ● Toowoomba QLD: Hunt's Electronics, 18 Nail St 32 9677 ● Townsville QLD: Tropical TV, 49 Fulham Rd, Vincent Village 79 1421 ● Wagga NSW: Wagga Wholesale Electronics, 82 Forsyth St ● Wodonga VIC: A&M Electronics, 78a High St 24 4588 ● Whyalla SA: Mellor Enterprises, Shop 2, Forsyth St, 45 4764

**STORE HOURS**

All Dick Smith stores are open from 9am to 5:30pm (Saturday 9am to 12 noon) except Queensland stores which open and close half hour earlier. Many stores are open for late night trading. Phone your nearest store for details.



# Letters to the editor

## Unemployment: a waste of talent

I am grateful to Electronics Australia, and to Professor Blatt, for the article, "Will Robots take your Job?" (December, 1980), and would appreciate a small space in your magazine to comment.

It is highly evident that the philosophies and concepts pertinent to the changed environment thrust upon us are already well advanced, although little as yet has come into the public domain for proper debate. Towards that end I would like to put several arguments regarding the current situation in support of Professor Blatt.

Looking at the situation described in which people are employed where they are not necessarily required in order to maintain levels of employment, it is increasingly the situation in which the difference between employment and useful work is vague and inconsistent. The trauma associated with unemployment results not so much from the loss of the "job", but the loss of the associated level of income.

Correspondingly we have ever larger numbers of people on the dole who not only do not work, they cannot through lack of available resources. The whole of

their dole income goes toward finding adequate food and shelter, with none remaining by which their lives may be more constructive and contributive in the community. In both situations the waste of talent and ability is extraordinary.

G. Hardwick,  
Dandenong, Vic.

## Import statistics & projector market shares

The statement on page 37 of your October issue concerning Hanimex's claimed 76% share of the 16mm projector market has come to my notice.

Only if one totally ignores the import of projectors under security that are not included in the Bureau of Statistics figure under Item 90.08.290/0231 can one come to such a conclusion during certain times of the year. On that basis, Bell & Howell could claim over 70% of the "market" in the September 1982 quarter.

As any importer knows, imports are not a reliable basis for market share estimates, and from trade sales statistics drawn from information submitted by,

good natural bass reproduction, as mentioned in your review of our 8066s.

Now the second count – fancy not knowing that we produce an AM/FM tuner with a hifi AM section. We certainly feel that with its low-noise balanced antenna system, (pioneered by us in 1970 – see EA May '71), 13kHz AF response, and stereo simulation, it will give even your fine tuner a run for its money, though at \$760 at least it is fully built and guaranteed.

Perhaps one day, when we have enough dealers to handle our Australian products we may even advertise.

Ron Cooper,  
Audiosound Laboratories,  
148 Pitt Rd,  
North Curl Curl, NSW, 2099.

**COMMENT: We are sorry we were unaware of your AM/FM tuner. We wonder how many others were similarly unaware.**

among others, both Hanimex and Bell & Howell it can be shown that Hanimex's market share in the 1981/82 period was closer to 50%. This is a creditable performance but with two leading makes sharing most of the Australian market, not very surprising.

In view of the considerable discrepancy in these figures I believe it would be in the best interests of all concerned that this letter be published in the next available issue of "Electronics Australia".

K. R. Jones,  
A.V. Communications Division,  
Bell & Howell Australia Pty Ltd.

**COMMENT: the figure quoted in October was based on import statistics from March 1981-82, and did not cover projectors imported under security.**

## Historical radio society

The Historical Radio Society of Australia was formed last April, with the aim of assisting members interested in the preservation and restoration of early radio and associated equipment, and the collation and interchange of relevant information. We have informal arrangements for interchange of information with the Antique Wireless Association of Holcomb, New York, the British Vintage Wireless Society and the New Zealand Vintage Radio Society.

We now have 74 members in all states of Australia plus NZ and UK and produce a quarterly newsletter. If you feel disposed to mention our existence in your magazine, I would be happy to answer all enquiries.

Ray Kelly, Secretary,  
Historical Radio Society of Australia,  
49 Sharon Rd,  
Springvale, Vic 3172.

## What about an S-100 computer?

I must congratulate your magazine for bringing a wide and excellent selection of projects to the average constructor. However, there is one very ignored area, which is at the forefront of research and development, that seems to be overlooked even by your fine magazine – I am sure that many readers will agree with me here.

Now to understand what on Earth I am going on about – the ignored area is an article on how to put together a personal home computer using S-100 boards (readily and relatively cheaply available) using a 16-bit microprocessor. If EA would publish an article on how to put together an S-100 system, I am sure many readers dissatisfied with the popular micros on the market would find such a system unbelievably power-

## Comment on the November editorial

Your November 1982 editorial regarding Australian manufacture of loudspeakers to the theories of A. N. Thiele and Dr Richard Small certainly strikes a sensitive spot with this organisation. However, let me say that we don't just stop at their theories. The many conflicting parameters that involve design and manufacture of a good loudspeaker system are difficult enough, but in this country we are blessed with having not one but two of the most highly regarded engineers in the world, right on our doorstep. (Dr Small was recently awarded the silver medal of the Audio Engineering Society of America.)

Hence, we don't just use their theories. The direct assistance given to me personally by both Neville and Dick with the bass-end alignments of all our loudspeaker systems is much appreciated.

Yes, we agree that our larger speakers should be on stands for

# JAYCAR NUMBER 1 FOR VIDEO

WE HAVE THE BIGGEST RANGE OF VIDEO ACCESSORIES!

Check out our great range of video connector cables! Ideal for video-to-video dubs!

- BNC plug - BNC plug 1.5m coax Part No. VC-1 \$6.95
- BNC plug - PL259 1.5m coax Part No. VC-2 \$6.95
- PL259 - PL259 1.5m coax Part No. VC-3 \$4.95
- PL259 - RCA plug (metal) 1.5m of coax Part No. VC-4 \$5.95
- RCA plug - RCA plug (metal) 1.5 metre coax Part No. VC-5 \$4.95
- BNC plug - RCA plug (metal) 1.5 metre coax Part No. VC-6 \$5.95
- Sanyo (6 pin DIN plug) to 2.5 & 3.5 RCA plug Part No. VC-8 \$8.95 (all coax 75 ohms)

### PLUG ADAPTORS

- PA21 PL259 plug to RCA socket \$2.95
- PA22 PL259 plug to BNC socket \$3.95
- PA23 BNC plug to RCA socket \$3.95
- PA24 SO239 socket to BNC plug \$3.95

### TV ACCESSORIES

- FL-1 Coax (75 ohms) fly lead Belling Lee coax plug to B/L coax plug 1.8 metres \$2.95
- FL-4 As above but 4.5m long \$4.95
- FL-2 Coax lead 1.8m B/L line plug to B/L socket \$3.45



VIDEO SWITCHING BOX

**\$49.50**

**LOW LOSS RF SWITCHING**  
 - Allows inputs for; VCR, Video Disc (etc); Antenna, Cable TV, Video Games and Home Computer.  
**WOW!!!**

VJ-104-CY

### MORE VIDEO ACCESSORIES

- VP-8 8 pin square video connector line plug \$7.95
- VS-8 8 pin square video line socket \$7.95
- PA-25 5 pin 180 degree dubbing adaptor. Reverse pins for video use \$5.95
- VC-15 6 pin DIN plug to 6 pin DIN plug 1.5 metres \$4.95
- VC-17 5 pin DIN plug to 5 pin DIN plug (reverse pins for video) The plugs are moulded in red to indicate that it is a video connector, 1.5m \$4.95
- VJ.104CY Video camera cable (bulk) 2 x 75 ohm video, 2 x shielded microphone, 6 other carriers. Designed for BETA but perfectly suitable for VHS. Up to 30 metre lengths. \$3.95/metre


## superbright LED

The average 15 cent LED has a light output of 1.8mCd (milli Candelas) at 20mA. Can you imagine a 200mCd LED? (at 20mA)? Well if you can't - buy one and find out. They are ideal for panel illumination or very low current work. (They will still give useful light at 1mA!).

Red with clear lens - 69c each  
 10 up only  
 62c each



VS-8



### T.V. and F.M. splitters

Model	F Range (MHz)	Impedence (Ohms)		Output	Band	Splitting loss	Isolation	V S W R
		IN	OUT					
DDF-332 U/V	50-890	300	300	2	VHF UHF	3.5 4	25 20	1.5 1.7
DDF-772 U/V	50-890	75	75	2	VHF UHF	3.5 4	25 20	1.5 1.7
DDF-774 U/V	50-890	75	75	4	VHF UHF	6.7 7.6	30 22	1.4 1.8



- 75 ohm 2 way \$4.95
- 75 ohm 4 way \$6.95
- 300 ohm 2 way \$3.95

## Video Enhancer

NOT A KIT - BUILT AND TESTED....

**\$89**

Unbelievable but true. This unit enables you to actually IMPROVE a copy of a recorded video tape. How? By amplifying the top end of the video signal by a small amount. This sharpens up the detail of the picture. Dubs can actually look better than the original. Works as a video distribution amplifier as well. Will drive up to 4 VCR's from one VCR input.



**magnificent!**

## Jaycar NUMBER 1 FOR KITS

125 YORK STREET, SYDNEY 2000  
 PHONE: 264 6688 TELEX: 72293  
 "NEVILLES CORNER"  
 Cnr. CARLINGFORD & PENNANT HILLS ROAD,  
 CARLINGFORD  
 PHONE: 872 4422 or 872 4444

MAIL ORDERS TO: BOX K-39 HAYMARKET, SYDNEY 2000  
 POST AND PACKING CHARGES  
 \$5 - \$9.99 (\$1.50) \$10 - \$24.99 (\$3.20)  
 \$25 - \$49.99 (\$4.50) \$50 - \$99.99 (\$6.50)  
 \$100 and over (\$8.00)

Mail Order by **BANKCARD**  
 Via Your Phone




## NEW EA Wide-band AM Tuner

FANTASTIC VALUE AT ONLY

**\$249**



Australia is one of the few countries in the world where wideband AM is transmitted. In fact a good quality AM signal can be much better than its FM counterpart! Anyone who has suffered from FM multipath distortion will know what we mean. The Playmaster AM tuner is a true broad-bandwidth superhet design. Once again, the Jaycar kit is a high quality approach. The Jaycar kit provides all components to complete the project INCLUDING a completely pre-punched cabinet.

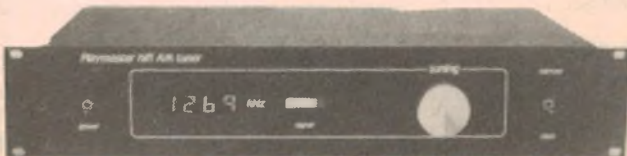

ful and good value, as they can choose the languages (eg Pascal, FORTH, BASIC, etc) they want on it and whatever hardware configuration they like.

K. Fong,  
St Lucia, Qld.

## Watch out for pink capacitors

Being a regular reader of your "Serviceman" articles, I am surprised to find a great deal of this column seems to consist of problems related to Sanyo TVs.

Working for a company which inherited the servicing of some Sanyo TVs, I took it upon myself to get some of the most common problems ironed out before confronting my first customers. With this in mind, I visited a friend who is a local serviceman with years of experience with all brands of TVs. His one piece of advice which stood me in excellent stead to confront most of the faults a Sanyo seems to produce was "look out for pinkies".

A very large percentage of the problems in a Sanyo seem to be caused by electrolytics drying out. These capacitors started life coloured grey. Whether it is due to heat or leaking electrolyte, the plastic skin of a faulty capacitor turns pink or in extreme conditions, when short circuit, a chocolate brown.

By checking all electros for discolouration and replacing those which show the sign of wear and tear, the common problems which seem to fill the pages of "Serviceman" can be eliminated with the greatest of ease.

A. MacGregor,  
Sunbury, Vic.

**The "Serviceman" comments: If only it was as easy as that. Some faulty electros do change colour but most are far more sneaky.**

## Back issues wanted

I am a reader of your great magazine and I also like the way you deal with everything in electronics. I am interested in television and I like reading the Serviceman over and over. I would like to get back issues of "Radio, Television and Hobbies" and "Electronics Australia" and books about television as advertised in your magazine many years ago or let me know where to get them. I am only 15 years old.

Peter Phillips,  
17 Cuthbert St,  
Aspley, Qld.

**COMMENT: As you can see we have published your name and address. There's always the possibility that a Brisbane reader has a collection of back issues that he is prepared to let you have.**


# LIKE TO GET AN AMATEUR RADIO CERTIFICATE? IT'S MUCH EASIER WITH PROFESSIONAL HELP.



If something's worth doing, it's worth doing well. So don't waste your valuable spare time finding your own way through the Amateur Radio maze. Ask Stott's instead. We have top professional instructors, who'll make sure your time is well spent on your way to an operator's certificate. You'll have individual attention, working at your own speed in the comfort of your own home. Any queries will be answered personally, and promptly.


So don't delay. Mail the coupon for full details.

Over and out.



**Stotts**

CORRESPONDENCE COLLEGE



**The name to trust in correspondence education.**  
Please send me free, and without obligation, full details of the following courses:

\_\_\_\_\_ (PLEASE PRINT)

\_\_\_\_\_

MR MRS MISS \_\_\_\_\_ AGE \_\_\_\_\_

ADDRESS \_\_\_\_\_

\_\_\_\_\_ POSTCODE \_\_\_\_\_


Stott's undertake that no sales counsellor will visit you

**The Stott's range of courses in Amateur Radio is:**

- Novice Amateur Operator's Certificate of Proficiency.
- Amateur Operator's Certificate of Proficiency.
- Amateur Operator's Limited Certificate of Proficiency.
- Radio for Amateurs.

Melbourne, 159 Flinders Lane 3000 Tel: 63 6212  
 Sydney, 363 George Street 2000 Tel: 29 2445  
 Brisbane, Suite 3, 65 Mary Street 4000 Tel: 221 3972  
 Adelaide, 95 Pine Street 5000 Tel: 223 3700  
 W. Perth, 25 Richardson Street 6005 Tel: 322 5481  
 Hobart, 150 Collins Street 7000 Tel: 34 2399  
 New Zealand, Box No 30 990 Lower Hutt Tel: 670 370

A/S741637/A263

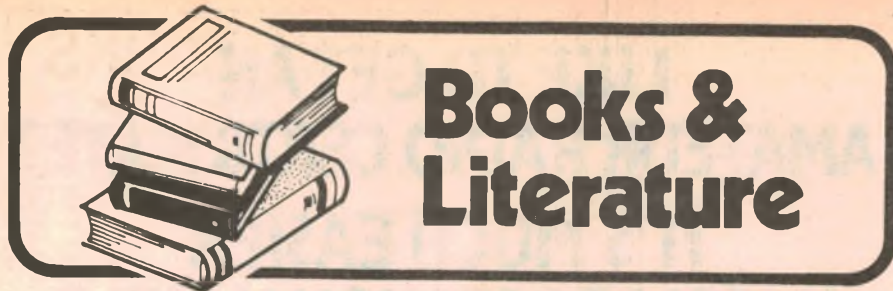

# Books & Literature

## A complete video handbook



**THE COMPLETE HANDBOOK OF VIDEO**, by David Owen and Mark Denton. Published by Penguin Books, Harmondsworth, Middlesex, England. Soft covers, 224 pages, 255mm x 175mm. Lavishly illustrated with diagrams and photographs, both monochrome and colour. ISBN 0 14 046 545 6. Recommended Australian price, \$12.95.

This is a quite lavishly produced book, with imaginative layouts, good quality paper and printing, and freely illustrated in mono and colour.

The index is also quite impressive. Chapter headings include: The Video User's Guide; The Video Buyer's Guide; The TV Connection; All About Cameras; The Video Director; Making Video Work For You; Optional Extras; Appendices.

Unfortunately, that's the good news. The bad news is that the technical text does not stand up well to detailed examination, with far too many inaccuracies in evidence. Some of these are merely mildly irritating, like "Hertz per second", and NTSC as the acronym for a misquoted "Never the Same Colour Twice". Others are more serious.

On page 69 there is a description of how to use a crimping tool to fit a connector to a cable. Apart from the fact that the instructions are barely adequate anyway, they include the following quaint phrase, "...insert the central con-

ductor which acts to increase the energy supply across the connection". What does it mean? You work it out.

On the same page is another panel describing how to splice tape. Again, the instructions are very condensed but, in any case, they would appear to have been formulated for audio tape, and make no allowance for the very real problems involved in splicing video tape — even assuming it to be an acceptable practice!

On page 109 (Caring For Your Camera) there is portrayed a multimeter with instructions on how to test a cable for continuity. One label on the drawing, arrowed to the appropriate scale reads, "Ohm scale (to measure intensity of current)". A second label reads, "DC scale (to measure battery current)". It is pointing to the decibel scale.

But the (booby) prize must surely go to the drawing at the top of page 25, which purports to show a typical VCR tape path and recording mechanism. It portrays the drum as carrying three heads dispersed around its top edge; playback, erase and record, in the latter instance drawn in one place with the arrow running somewhere else. Not only is the disposition of heads thoroughly untypical of a domestic deck, but the heads would never even contact the tape!

It is hard to say how many other questionable statements might emerge from a detailed reading of the technical matter.

In the latter part of the book, dealing with ways to use video cameras — story telling, direction, lighting, continuity, etc — the authors appear to be on more familiar ground. While the value of the material may be debatable in one or two instances, there do not appear to be any major errors.

There is even a chapter on Home Erotica (making one's own adult movies) which, if nothing else, is good for a few giggles.

"To prevent unsightly close-ups of gooseflesh, heat the room first."

But the overall reaction is one of disappointment. Given a more carefully edited text, a book as visually attractive and otherwise as well produced as this could have been a winner.

As it is — just so-so. (P.G.W.)

## Logic circuits

**UNDERSTANDING DIGITAL LOGIC CIRCUITS** by Robert G. Middleton. Published by Howard Sams & Co, Ind 1982. Soft covers, 135 x 215mm, 392 pages, illustrated with photographs and diagrams. ISBN 0-672-21867-4. Price \$27.95.

This book is intended for technicians who are now involved in servicing analog equipment and who wish to expand their expertise in digital electronics. The emphasis is on the type of digital logic circuits encountered in appliances such as scanner scanning receivers, video cassette recorders and digital test instruments.

The book begins with a discussion of logic diagrams and basic gates. Nineteen chapters are included, covering input and output waveforms, De Morgan's laws, basic adders, flipflops and clock circuits, counters, interfacing considerations, video games and memories among other topics.

Practice as well as theory is comprehensively examined, with troubleshooting tips provided for many of the digital control circuits in common use. The text is well supported with diagrams of gate operation and pin-outs of typical TTL packages and should form a valuable reference for anyone who wishes to expand their knowledge of logic circuitry.

One puzzling fact in a book of this nature is that microprocessors are not mentioned at all, in spite of the occurrence of chapters on RS232 interfacing and the use of MOS memory devices. As a guide to trouble-shooting servicing typical consumer equipment, however, the book can be commended.

Our review copy came from McGill's Authorised Newsagency, 187 Elizabeth St, Melbourne, 3000.

## Playing the sharemarket

**PLAYING THE STOCK AND BOND MARKETS WITH YOUR PERSONAL COMPUTER** by L. R. Schmeltz. Soft covers, 308 pages, 128 x 210mm, illustrated with photos and sample programs. Published by TAB Books Inc 1981. Price \$15.95. ISBN 0-8306-1251-3.

Although published in the United States and dealing exclusively with the American scene, this book includes some worthwhile advice for small investors interested in using a computer to keep track of share market transactions.

Chapters include an introduction and author's disclaimer, a brief guide to current personal computers and separate



headings on setting goals, selecting shares, approaches to the market, the uses of computers, sample programs for investment strategies and record keeping and "The Nuts and Bolts of Computer Operation".

The sample programs provided include elementary trend analysis routines based on several investment "systems". The program listings provided are in AppleSoft Basic, but full details are given for conversion to other versions of the language.

Apart from its general advice and the program listings one of the most valuable sections of the book are two extensive glossaries, one of computing terms and the other of share-market jargon. Three appendices provide a list of commercially available programs, sources of further information (relevant in the US only) and an extensive reading list.

Perhaps the best way to sum up the theme of this book is to quote the author's own words "an average investor can make his own decisions and do just fine".

Our review copy came from McGills Authorised Newsagency, 187 Elizabeth St, Melbourne, 3000.

## Computers in amateur radio

**MICROCOMPUTERS IN AMATEUR RADIO** by Joe Kasser. Published by TAB Books Inc 1981. Soft covers, 128 x 210mm, 306 pages, illustrated with diagrams. ISBN 0-8306-1305-6. Price \$15.95.

The subtitle of this book is "Putting microprocessor-based computers to work as viable station accessories". According to the author a microcomputer can significantly improve the operation of an amateur radio station, in, for example, the tuning of receivers and transmitters, initiation of pre-scheduled transmissions and record-keeping.

Morse code and radioteletype applications are covered and circuits provided for computer interfaces for signal decoding. Programming is covered on a general basis, including common program errors.

A large proportion of the book describes the "GOLEM-80" project, an S-100 microcomputer put together by the Chesapeake Microcomputer Club and the Radio Amateur Satellite Corporation (AMSAT). The discussion is in general terms only, with no circuit diagrams or details of operation.

Appendices making up about 25% of the book provide listings in 8080 assembly language for the AMS-80 Monitor program used by GOLEM, a video driver for a 64 x 16 memory mapped display (the board itself is not

described), a calculator for orbits of the OSCAR amateur radio satellites, morse code generator, RTTY program and a real-time clock.

Since much of the material concerns facilities which are in use only in the United States and circuits for a particular club project, the chief value of this book must be considered "inspirational". The extensive software listings could be useful to anyone wishing to write similar programs, but without details of the hardware with which they are used it is not possible to implement them directly.

Our review copy came from the ANZ Book Company Pty Ltd, PO Box 459, Brookvale, NSW 2100.

## IERE conference

**ELECTROMAGNETIC INCOMPATIBILITY: IERE Conference Proceedings No. 56.** Soft covers, 322 pages, 210 x 292mm, illustrated. ISBN 0 903748 51 7 Price £35.

This book contains the proceedings of the International Conference on Electromagnetic Incompatibility held at the University of Surrey, UK on September 21-23, 1982. Thirty papers are reproduced in full, on subjects such as lightning damage to aircraft electronics, measurement of microwave radiation emissions, the interference effects of CB radio and the screening performance of RF coaxial cables and connectors.

Modelling and analysis and the use of topological techniques at the design stages to minimise conducted and radiated electromagnetic interference are covered in several papers, while another looks at a proposed syllabus for a university level course in RF interference and prevention procedures.

The book will be a useful reference for those working in communications, equipment design and other fields where interference problems must be dealt with. Contact the Publications and Sales Controller, Institution of Electronic and Radio Engineers, 99 Gower Street, London, UK WC1E 6AZ.

## DXer's Diary

The 1983 "International DXers Diary", published by The Finnish DX Association is now available. The compact 88 x 148mm diary has a section for each day of 1983 and provides reminders of all the major national anniversaries of the world, and days specially marked by various shortwave broadcasters.

In addition there is an article by Arthur Cushen on shortwave listening and technical articles in Finnish, as well as a list of some major shortwave stations.

The diary is available from Arthur Cushen at \$A7.00. For further information write to Arthur at 212 Earn St, Invercargill, New Zealand.

# NEW BOOKS

NEW — NEW — NEW

Latest editions of some of the most popular books on the subject.

The Radio Amateur's Handbook — 1983 Edition. A must for the Radio Amateur and Professional	\$19.95
RSGB Handbook Volume 1	\$21.85
RSGB Handbook Volume 2	\$18.90
Reference Data for Radio Engineers (New Edition) ITT	\$47.25
Radio Handbook — Orr New 22nd Ed	\$42.95

## Computer Books

Atari Sound and Graphics — Moore. A self-teaching guide	\$13.95
Computer Reference Guide's Software Handbook — Australian buyers' guide to all types of software products for minicomputers	\$27.65
Fast Basic — Beyond TRS-80tm Basic	\$20.95
TRS-80 Programs and Applications for the Colour Computer — Baker	\$21.95
Compute!'s first book of Atari	\$19.95
Compute!'s second book of Atari	\$19.95
Compute!'s first book of PET/CBM	\$17.20
IBM personal computer — An Introduction to Programming & Applications — Goldstein	\$24.95
IBM's Personal Computer — Que Corp	\$20.95
Microprocessor Circuits Vol. 1 — Noll	\$14.75
Z-80 User's Manual — Carr	\$16.75

## Adam Osborne Books

Z80 Programming for Logic Design	\$14.75
6800 Assembly Language Programming	\$26.35
Intro to Microcomputers — Volume 3: Some Real Support Devices	\$21.00
6502 Assembly Language Programming	\$26.35
The 8086 Book	\$23.80
Intro to Microcomputers — Volume 1: Basic Concepts 2/e	\$22.40
6809 Assembly Language Programming	\$26.35
Z8000 Assembly Language Programming	\$23.95
Interfacing To S 100/IEEE 696 Microcomputers	\$23.25
8089 I/O Processor Handbook	\$ 7.15
68000 Microprocessor Handbook	\$ 7.15
Osborne CP/M User Guide	\$24.75
CRT Controller Handbook	\$15.45
VISICALC Home and Office Companion	\$24.80
Assembly Language Programming for the Apple 11	\$19.50
Some Common Basic Programs — Atari Edition	\$21.00
Some Common Basic Programs — TRS-80 Edition	\$22.40
6502 Assembly Language Subroutines	\$17.80
Intro to Microcomputers — Volume 0: Beginners Your Atari Computer	\$11.15
Practical Basic Programs — Apple 11 Edition	\$26.30
Practical Basic Programs — TRS-80 Edition	\$21.00
Some Common Basic Programs — Apple 11 Edition	\$19.00
Wordstar Made Easy	\$18.55
Practical Pascal Programs	\$22.40
Discover Forth	\$23.25
6809 Microcomputer Design Guide	\$27.95
CP/M User Guide 2nd Ed	\$18.20
The HP-IL System: An Introductory Guide to the Hewlett-Packard Interface Loop	\$23.80
Practical Basic Programs — IBM PC Ed	\$22.40
Pet Personal Computer Guide	\$23.25
CBM tm Professional Computer Guide	\$23.25

## Other Titles

Practical Transformer Design Handbook	\$32.95
Piano Servicing & Tuning & Rebuilding — Arthur Reblitz	\$21.00
Audio Servicing Theory & Practice — Wells	\$22.15
Australia Radio Frequency Handbook — McDonald	\$12.95
Confidential Frequency List — Ferrell	\$14.20
Electronic Design With Off-The-Shelf Integrated Circuits — Meiksin & Thackray	\$15.50
Understanding DC Power Supplies — Davis	\$10.95
Videocassette Recorders: Theory & Servicing — McGinty	\$21.25

Just a few of the thousands in stock. Call in or write. Prices subject to fluctuation. Correct at time of going to press.

If the book you require is not listed below, it can be ordered from us.

MAIL ORDERS BY RETURN  
PLEASE ADD \$1.50 per parcel postage (Vic)  
\$2.50 per parcel interstate

## TECHNICAL BOOK & MAGAZINE CO.

295-299 Swanston St,  
MELBOURNE 3000. Ph. 663 3951

# New Products ...

Product reviews, releases & services

## Hanimex "Diaprint" turns slides into prints

A new photographic printer developed by Hanimex allows slide enthusiasts to make instant prints from slides. The device can be used as a "stand alone" printer, or can be mounted on any current Hanimex La Ronde slide projector to produce prints even while a slide show is in progress.

Designed by Hanimex's own team of engineers, "Diaprint" was unveiled recently during the Photokina photographic exhibition, held in Cologne, West Germany, where it attracted considerable attention.

When a particular slide is favoured and a print desired, the Diaprint device is capable of duplicating the image in either colour or black and white, magnifying the slide 3.5 times.

Hanimex's Diaprint uses Polaroid peel apart film and produces properly exposed prints through use of an electronically



The Hanimex Diaprint prints a copy of a colour slide in about one minute.

controlled exposure system. Black and white prints are said to take only 30 seconds, while colour prints are produc-


ed in about one minute. To achieve maximum definition Hanimex has mounted a 38mm f/5.6 colour corrected lens which can be stopped down to f/16, and a brighten/darken control facility is provided.

Because the unit is battery operated it is fully portable, and a single set of four "AA" size alkaline batteries are said to provide power for up to 500 prints. An "Auto-Off" feature ensures that batteries are conserved.

Cost of the Diaprint is around \$200, and for those wishing to mount the printer directly onto a slide projector Hanimex provides three models to suit, ranging in price from around \$169 to \$275.

More information is available from Hanimex Pty Ltd, 108 Old Pittwater Road, Brookvale, NSW, 2100. Telephone: (02) 938 0400.

## Amtex ready-built solar power panels

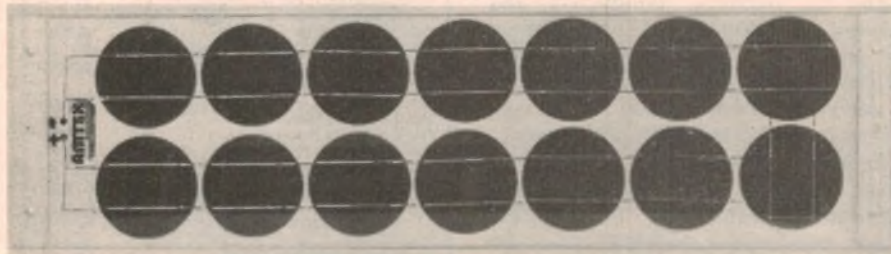

Many people have responded to the Solar Powered Fountain project presented in the November, 1982 issue of "Electronics Australia", but have indicated that they do not wish to assemble the solar panel themselves.

Until recently there was no choice in the matter but now Amtex Electronics have come to the rescue with a kit which includes a pre-assembled solar panel. Unlike the do-it-yourself version the panel uses a finned, anodised aluminium extrusion as its base, and the solar cells are encapsulated in RTV silicon rubber with a Lexan front top surface.

Price of the assembled solar panel and pump is \$195 plus \$5 postage and handling, while the pump itself is available separately at \$20, with the same charge for postage and handling. The pump is fully submersible and is now rated at 1500 litres per hour, running on 12V DC

at 3.5A. Applications include topping up caravan header tanks, gardening and aerating fishponds, to name a few.

For more information contact Amtex Electronics, PO Box 285, Chatswood, NSW 2067. The phone number is (02) 411 1323.

## Mining equipment exhibition for Sydney

Nineteen British companies will show their latest machinery and equipment at the International Mining and Exploration Exhibition (AIMEX) being held at the RAS Showground in Sydney from February 7 to 12, 1983.

The exhibition has been arranged by the Association of British Mining Equipment Companies (ABMEC) in co-operation with the British Overseas

Trade Board. The exhibition will occupy some 1280 square metres of stand space in the Manufacturers Hall.

Among the products on display will be communications and signalling equipment, conveyors, couplings and connectors, dump trucks, filtration equipment, power packs, roof supports, safety aids, special lubricants, and tunnelling, drilling and loading machines.

## National Semiconductor microprocessor modules

National Semiconductor Corporation now has available a 62-page data booklet containing data sheets on the first 14 of its Series/800 CMOS Industrial Microcomputer boards.


Series/800 is a complete range of microcomputer products aimed at applications in harsh industrial environments. The line includes CPU, memory boards and digital and analog I/O components.

Also available from National Semiconductor are four new members of its high speed CMOS microcomputer modules, the MA2000 series.

For more information contact National Semiconductor Corporation, Cnr Stud Road and Mountain Highway, Bayswater, Vic. 3153.



# The Unmistakable Frontrunner in 70MHz Scopes

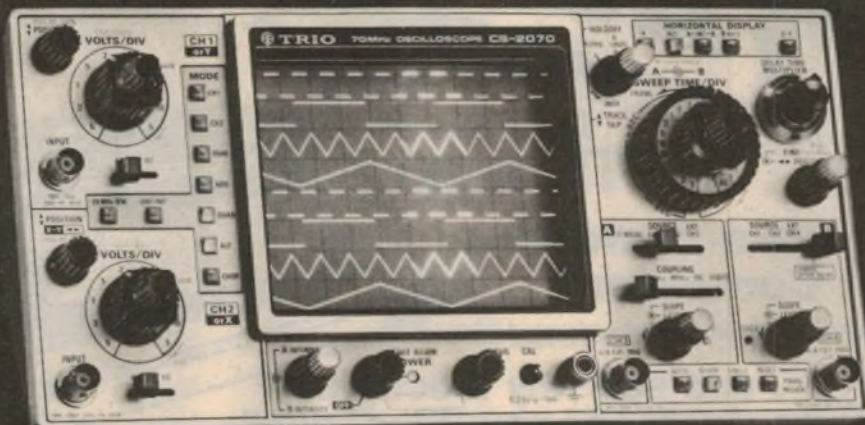

NEW

ONLY  
\$1595  
+ S/T

Compact & Light

## 4 Channel 8 Trace Display

70MHz 4 Channel Oscilloscope

# CS-2070

Available at a Leading  
Stockist Near You

The same sophisticated oscilloscope technology that made Trio the name to think of for 100MHz scopes is now making 70MHz scope history with the CS-2070.

Based on Trio's oscilloscope expertise, the CS-2070 now brings you such advanced features as alternate delayed sweep, extremely high sensitivity, and delayed intensified sweep in a full-feature 70MHz scope. All of this high performance is displayed using a bright, clear CRT logic-controlled for high reliability. The CS-2070 gives you all the performance, quality, and ease-of-operation you expect from an advanced 70MHz scope and is proving again how Trio is leading the field in oscilloscope technology.

- World's first 70MHz 4-channel, 8 trace scope with alternate delayed sweep.
- 1mV/div sensitivity usable all the way to 70MHz
- Sweep time to 5ns/div for easy-viewing of fast signals.
- Independent main and delayed sweeps for intensified delayed sweeping of signals of widely varying frequencies.
- The large CRT uses 12kV of accelerating potential for a clear, bright display and exceptional reliability.
- Feather-touch electronic switches with panel setup memory.
- Compact 28.4(W) x 13.8(H) x 40.0(D)cm package weight only 7.4kg.
- The highly stable and energy-efficient switching-type power supply requires only 56W.

Parameters Pty. Ltd. Sydney (02) 439 3288 Melbourne (03) 580 7444

Adelaide PROTRONICS (08) 212 3111. TRIO ELECTRIX (08) 51 6718. K. D. FISHER (08) 277 3288

Brisbane L. E. BOUGHEN (07) 369 1277. ST. LUCIA ELECTRONICS (07) 52 3547

Canberra GEORGE BROWN (062) 80 4355. ORTEX (062) 82 4995. Hobart IMBROS (002) 34 9899.

GEORGE HARVEY (002) 34 2233. Launceston GEORGE HARVEY (003) 31 6533

Melbourne RADIO PARTS GROUP (03) 329 7888. GEORGE BROWN (03) 419 3355. ELLISTRONICS (03) 602 3282

Newcastle D.G.E. SYSTEMS (049) 69 1625. GEORGE BROWN (049) 69 6399

Perth W. J. MONCREIFF (09) 325 5277. PROTRONICS (09) 362 1044. Rockhampton PURELY ELECTRONICS (079) 21 058

Sydney GEORGE BROWN (02) 519 5855. DAVID REID ELECTRONICS (02) 29 6601. RADIO DESPATCH SERVICE (02) 211 0191

Townsville NORTEK (077) 79 8600. Wollongong MACELEC (042) 29 1455

**PARAMETERS**<sup>PTY LTD</sup>  
PERFECTION IN MEASUREMENT

# DICK SMITH



# NEW ZEALAND

## The Dick Smith SYSTEM 80

**"the best value around for a ready built Computer" . . .**

Quotation from Electronics Australia, June 1982.

Try it yourself . . . and see why Electronics Australia liked it so much! The new 'Blue Label' System 80 computer has even more features than before - and best news of all, it actually costs less!

"Overall we are very impressed with the Blue Label System 80. On a dollar per function basis it probably represents the best value around for a ready-built computer. Other systems can be bought for less, but ultimately they are not as readily expandable as the System 80. There is also the matter of software, and here the System 80 really scores, with hundreds of compatible programs available for the TRS-80 as well as those specially written for the System 80".

Reprinted with kind permission from ELECTRONICS AUSTRALIA, June 1982.



**SAVE \$300**

WAS \$1,295<sup>00</sup>  
**NOW ONLY \$995<sup>00</sup>**

Cat X-4005

**PROFESSIONAL SOLDER STATION HOBBYIST'S PRICE!**

The Exclusive **DICK SMITH SOLDERING STATION**

Here's our brilliant temperature controlled solder station, offering you the best quality at an unbelievably low price. Compare our solder station with others - ours features fully variable temperature control (from around 200 degrees to over 500 degrees Celsius) with a temperature meter to show you what's happening. And it's fully approved by the Energy Authority. Comes complete with lightweight iron holder & cleaning sponge and a comprehensive instruction manual. Cat T-2000

**ACCESSORIES**  
 Replacement Tips  
 Medium Chisel T-2002  
 Thick Chisel T-2004  
 Fine Conical T-2005  
**\$5.95 EACH**  
 Replacement Sponge T-2010 **\$1.90**

The books that have made electronics fun!

### DICK SMITH'S FUN WAY INTO ELECTRONICS

**VOL 1.**  
 4th printing of this amazing book. 72 pages packed with exciting projects, all safe as they are battery operated AND all projects are illustrated so mistakes are virtually impossible.  
 Cat B-2600 **ONLY NZ \$5<sup>95</sup>**

**VOL 2.**  
 After mastering Fun way Vol. 1, why not go further. Learn about PCB's and soldering. 130 pages packed with 20 more projects.  
 Cat B-2605 **ONLY NZ \$7<sup>95</sup>**

**AMAZING VALUE**

**IT'S A MINI TEST BENCH!**  
 High input impedance 100K volt Super sensitive R514 movement. Rugged, accurate and reliable. Ideal for the workshop, laboratory or classroom. Checks transistor hFE, Ico, PNP NPN. Built-in oscillator gives two ranges of capacitance!  
 Cat Q-1140 **ONLY NZ \$87**

**HANDYMAN'S MULTIMETER 24 RANGES**  
 A reliable, economical multi-meter. Robust, high sensitivity, very easy to use. Comes complete with batteries, test leads & instructions. Cat Q-1024 **VALUE AT NZ \$35<sup>00</sup>**

**TALKING CHIP**  
 At last - a computer voice chip. As used in the Votrax Type N Talk and computer voice kit - now you can actually build it yourself! Fantastic for the experimenter!  
 Cat Z-6818 **NZ \$96<sup>00</sup>**  
 (Full kit also available - Cat K-3530 @ \$189.90)

## DICK SMITH Electronics

98 Carlton Gore Rd.  
 Newmarket,  
 Auckland 1.  
 Ph: 504 409

**POST & PACKAGE CHARGES**

ORDER VALUE	POST & PACKAGE CHARGES
\$5 - \$9.99	\$1.00
\$10 - \$24.99	\$2.00
\$25 - \$49.99	\$3.00
\$50 - \$99.99	\$4.00
\$100 or more	\$5.00

Mail Orders: Private Bag NEWMARKET



Shop by phone.  
 Use your Bankcard.  
 Or Visa card

## New Products

### Bosch digital clock has control outputs

Robert Bosch (Australia) Pty Ltd is now manufacturing a fully programmable digital computer clock. Apart from providing an attractive timepiece which shows time and day of the week, the "Digitimer DT 201" is equipped with a programmable controller which can switch four power outlets independently to control most appliances.



The computer can be programmed with a calculator-type keyboard to perform up to 20 daily or weekly switching functions. Appliances to a total of 10A can be switched on and off at exactly pre-determined times. Applications include security lighting, shop displays, aquarium control, air conditioning and heater control and irrigation, apart from household uses.

A 9V battery can be installed to maintain time and memory functions in the event of a mains power failure.

For details contact Robert Bosch (Australia) Pty Ltd, PO Box 66, Clayton, Vic 3168.

## New Products from Bill Edge

Bill Edge's Electronic Agencies now has available the "Screamer", an ear-splitting siren alarm said to put out a sound pressure level of 120dB at one metre. The sound produced is a warble, alternating between 1.2kHz and 1.5kHz, and the unit operates from a 6-12V supply.

The "Screamer" is a compact 85 x 102mm (L x D) and is supplied in a robust moulded plastic housing with a separate metal mounting bracket. Retail price is \$34.50.

Also available from Electronic Agencies is the Sibiao MF63 Multitester, an analog multimeter with 38 measuring ranges and four extended function scales, able to measure AC and DC current and voltage, resistance, capacitance, audio output level in dB and the  $h_{fe}$  parameter of transistors.

The Multitester uses both a function switch and a range selector switch to allow selection of the full measuring ranges in a reasonably compact space.

Dimensions of the unit are 171 x



The Sibiao MF63 "Multitester"

122 x 59mm and weight is approximately 500g without the six 1.5V AA cell power supply. Probes, batteries and a spare fuse are included in the price, along with an accessory transistor test socket.

Further information is available from Bill Edge's Electronic Agencies, 115-117 Parramatta Rd, Concord, NSW 2137 or 117 York St, Sydney. Phone (02) 29 2098.

### Applications of SCRs in high power inverters

Quentron Optics Pty Ltd has announced the availability of a 12-page leaflet describing the use of high power SCR resonant high frequency power inverters.

The use of SCRs in power inverters has previously been restricted to applications at frequencies below 10kHz because of the long turn on and turn off times of SCRs. New developments in the high frequency performance of SCRs are changing this situation, and the leaflet,

from Spellman High Voltage Electronics Corporation, shows how the newer devices can be used in inverters at operating frequencies up to 100kHz.

Examples covered in the paper include a design for a power supply rated at 300 amps at 5V and an induction heater operating at 100kHz. Spellman manufacture high voltage supplies using high efficiency inverters based on SCRs.


A copy of the paper and details of high voltage products are available on request from Quentron Pty Ltd, PO Box 75, Redfern, NSW, 2016. Phone (02) 698 9277.

## TRUSCOTT ELECTRONICS

- ALL SEMICONDUCTOR COMPONENTS
- CAR HI-FI
- CB RADIO

**IN FACT ALL YOUR ELECTRONIC NEEDS**

**SUPPLYING THE EASTERN SUBURBS WITH COMPETITIVE CITY PRICES AND SERVICE**

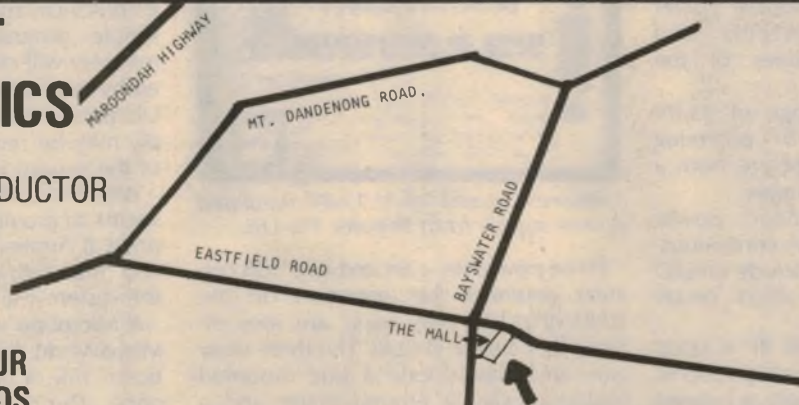

**TRUSCOTT ELECTRONICS**  
Cnr Eastfield and Bayswater Roads,  
South Croydon 3136, Vic.  
Phone (03) 723 3860.

## GE introduces "trunked" mobile radio

General Electric Mobile Radio Ltd, of Ryde, NSW, are in the process of introducing a trunk mobile radio communication system for subscribers in the Sydney area. This follows the successful introduction of a similar system in Melbourne. Known as the General Electric Mark V mobile radio system, it is aimed at overcoming the crowding which often occurs on shared single channels while, at the same time, making the best use of available channels.

The system will use five channels in the 800MHz (UHF) band, which have been allocated to the company by the Department of Communications. To ensure that these channels are used effectively the Department requires that there be a minimum of 70 users (ie mobiles) in the system, but would prefer it to be nearer 100.

In fact, statistics suggest that the five channel system could cater for up to 700 users. Even at this loading, a user should have a 60% chance of getting a free channel at the first attempt.

Selection of a channel is completely automatic. When a user initiates a call the system automatically searches for a vacant channel and, when it finds one, locks onto it. The system then transmits a code which identifies the particular mobile, the receiver of which is con-

tinuously scanning all five channels. As soon as it recognises its own code it latches onto that channel and sounds an alert tone to attract the user's attention. If the vehicle is unattended, a light will be activated to advise the driver on his return.

Calls initiated from a vehicle are handled in much the same way; the vehicle equipment looks for a vacant channel, locks onto it, and activates the base.

Once a channel is selected it is made exclusive for the duration of that call; no other subscriber can interfere with it, or eavesdrop on it. And, fairly obviously, up to five subscribers can use the system at any one time.

Systems such as this should go a long way in making far more efficient use of radio channels than has been possible in the past; offering less congestion on the one hand, yet making it possible for more companies to enjoy the benefits of communication with their vehicles.

The Mark V trunked radio system is available in a number of variously styled units, with installation and antenna mounting included in the price. There is no charge for calls on the trunk network.

For further information contact General Electric Mobile Radio Ltd, 5 Byfield St, North Ryde. Telephone (02) 888 8111.

## Audio, radio catalog from Benelec Pty Ltd

IFTA Australia has changed its name to Benelec Pty Ltd and has produced a new catalog covering its range of acoustic and radio engineering products. Power supplies, antenna systems and loudspeakers are specialities of the company.

Benelec distribute a range of 13.8V power supplies suited for powering equipment designed to operate from a nominal 12V DC battery supply.

The SEC-approved "Panther" power supply is rated to supply 2A continuously and 4A peak. Features include an LED power-on indicator and short circuit protection.

The "Transwest Model Mk III" is rated to deliver 4A at 50% duty cycle and up to 7.5A peak. The power supply is housed in a metal case with rear mounted output terminals. The power switch and mains fuse are mounted on the front panel. The "Transwest Model MkIV" has the same features as the MkIII model but is rated to deliver 6A, with 10A available at peak.



Transwest Model MkIV 13.8V regulated power supply from Benelec Pty Ltd.

Three new unity gain and two 3dB colinear antennas for operation on the 70-85MHz VHF low band are also offered by Benelec Pty Ltd. The three unity gain antennas include a side mounted folded dipole, a ground plane and a coaxial dipole type. All are designed for vertically polarised operation.

For more information on any of the products mentioned here contact Benelec Pty Ltd, PO Box 21, Bondi Beach, NSW, 2026, or telephone (02) 665 8211.

preliminary word processor manual provides sufficient information to connect a printer without a great deal of trial and error.

Although extensive, WordBee does have some faults. The lack of easily remembered control command names is one. More serious is the apparent absence of any command which allows spaces to be opened in text to insert new material. It can be done with the use of the Block copy mode, or the Find and replace function, but this seems like a lot of work just to insert a missing letter, for example.

Other failings are no doubt due to the fact that we reviewed a preliminary version of the program. The most glaring is the "Kill" or erase function, which according to the manual double checks the user's intention before deleting a text file. In our version of the program, it does not.

These details aside, WordBee is an impressive program, and is considerably enhanced by the features of the MicroBee itself. Bearing in mind the reservations expressed on the robustness of the keyboard, the MicroBee with WordBee would not be out of place in the small business.

## Conclusions

All in all the MicroBee is a compact, powerful computer, with features equally likely to meet the needs of the newcomer and the experienced computer user. For the newcomer the manuals leave something to be desired, despite the presence of a tutorial section (why is it one of the last sections in the book?).

Experienced programmers will be delighted by the power and flexibility of MicroWorld Basic and the extensive graphics capabilities of the MicroBee. A simple program to clear the entire memory will circumvent problems caused by retention of programs in memory. Ultimately, though, a hefty power supply may be required if much expansion of the system is planned.

With these reservations, the MicroBee seems to provide excellent value for the price. If Applied Technology's marketing and manufacturing plans are realised, the system will take off in a big way!

A MicroBee with 16K of memory and MicroWorld Basic costs \$449. An additional 16K of memory adds \$100 to the price. The WordBee word processing program is \$89.50 and an Editor/Assembler in ROM is available for \$59.50. An S-100 expansion interface is also available, at \$299, with disk drive, controller and CP/M operating system for \$799. There is no shortage of expansion options.

# COMPUTER SENSATION!!

You may have wondered why Jaycar did not (until now) sell home computers. We had many reasons but our main one was that we were not entirely "happy" with any of the units currently on the market. The closest we came to what we thought was a pretty good computer was the Apple. We thought that it was, quite frankly expensive. However it was sold and serviced throughout Australia by a reputable sales network — so there was no need for Jaycar!

That's why we got so excited when we saw the "Micro Professor MkII". It is the closest thing that we have seen to be software compatible with the Apple. Yes, we know what you're thinking. It's NOT one of those cheap Taiwanese "Apple" copies which infringe Apples' copyright. The Micro Professor MkII is a completely new and unique design in its own right. It just so happens that most of the widely distributed Apple software will run on this machine. O.K. But why so excited? LOOK AT THE PRICE! Check out the STANDARD FEATURES of this unit. Sit down. Think about it and COMPARE what you get with the Micro Professor MkII as STANDARD that are options on other machines!

★ 64K OF RAM SUPPLIED STANDARD  
all that you are ever likely to need!!

★ Text, lo and high resolution graphics  
STANDARD

★ Video AND TV  
(RF) output  
STANDARD



# Only \$598


★ Centronics printer interface  
STANDARD

★ Easy-to-use manual included in the  
price (over 248 pages)

★ Power supply included as  
STANDARD

★ Multitech BASIC is compatible with  
APPLE II BASIC. Most APPLE soft-  
ware will run on the Micro Professor  
Mk II

## video monitor

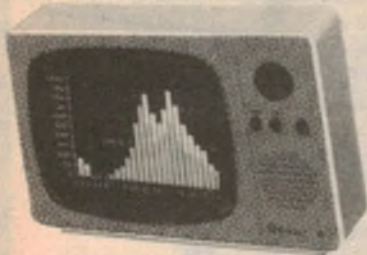


Screen — 12"  
Display area — 80 char-  
acters by 24 lines  
Input — RCA  
Bandwidth — 10Hz-  
20MHz  
Input sig. 0.5 to 2.0  
pp composite, sinc neg.  
240V AC & 12V DC  
Weight 8.6 kg

**\$199**

## green screen

## Micon data cassette



Micon adjustable azimuth — data compatible cassette

★ **\$4950** ★

### SPECIFICATIONS

Paddle Optional


CPU		R6502
ROM		16K Bytes
RAM		64K Bytes
BASIC	Interpreter	More than 90 instructions stronger than those for Apple II
Video	Type	Memory mapped into system RAM
Display	Mode	Text, low-resolution graphics, high resolution graphics (3 modes are mixed)
	Screen Format	960 characters (24 lines, 40 columns)
	Character Set	Upper case ASCII, 64 characters
	Character Type	5 x 7 dot matrix
	Graphics Capacity	1920 blocks (low resolution) In 40 x 48 array, 53760 dots (high resolution) in 280 x 192 array
	Number of Colors	6 colors
Keyboard		49 alphanumeric and function keys
Cassette	Interface	Use various cassette tapes and cartridges as data storage units
Software	Cartridge Interface	Connects to printers with Centronics I/F
Printer	Interface	Connects to color TV or video display
Display	Interface	Used for education & entertainment
Remote	Control Paddle	8 ohm, 55mm, 0.25W
Speaker		A switching power supply is provided to convert AC power to required power supply
Power		241 x 175 x 30mm
Dimensions		

## Jaycar NUMBER 1 FOR KITS

125 YORK STREET SYDNEY 2000  
PHONE 264 6688 TELEX 72293  
NEWELL'S CORNER  
Cnr CARLINGFORD & PENNANT HILLS ROAD,  
CARLINGFORD  
PHONE 872 4422 or 872 4444  
MAIL ORDERS TO: BOX K 39 HAYMARKET SYDNEY 2000

POST AND PACKING CHARGES  
NSW - \$8.99 (incl GST) QLD - \$9.99 (incl GST) VIC - \$9.99 (incl GST) WA - \$10.99 (incl GST) SA - \$10.99 (incl GST) NT - \$10.99 (incl GST) ACT - \$10.99 (incl GST) TAS - \$10.99 (incl GST) Other States - \$10.99 (incl GST)

Mail Order By **BANKCARD**  
Via Your Phone

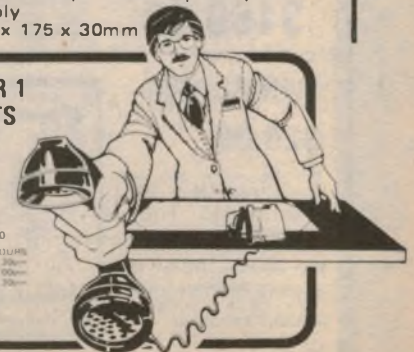

# ROD IRVING ELECTRONICS

**DIGITAL ENG. ANALYSER**  
**\$48.50**



EA August 80

**DIGITAL CAPACITANCE METER** **\$45.00**



Here is an inexpensive Digital Capacitance Meter which measures from 1pF to 99 99uF in just three ranges. It's simple to use and features a big bright four-digit display with automatic updating and decimal points. EA March 80

**ELECTRONIC DUMMY LOAD**  
**\$99.00**



With this unit you can test power supplies at currents up to 15 Amps and Voltages up to 60 Volts. It can "sink" up to 200 Watts on a static test and you can modulate the load to perform dynamic tests. ETI 147 October 80

**SELECTALOTT**  
**\$22.00**



"Who wants to be a millionaire...?" I do. "Selectalott" could help. It will select random numbers without superstition or bias... It could be you. EA December 80

**PHOTON TORPEDO GAME**



EA September 81

**\$24.50**

**7-SLOT S100 MOTHER BOARD**



ETI May 80

**\$85.00**

**FUZZBOX** **\$19.90**



Simple Fuzz Box for electric guitars. The no fuss, no nonsense Fuzz Box. Confused — So are we. Seriously though if you want a sound with a difference build this project and you can distort the waveform. It produces a sound which is buzzy (like politicians at election time). EA February 81

**150W MOSFET POWER AMP**  
**\$79.00**

Plus Transformer **\$43.50**  
Plus Heatsink Drilled, Tapped and Black Anodised **\$42.50**



A general purpose 150W Mosfet Power Amp Module. Here's a high power, general purpose Power Amplifier Module for guitar and PA applications employing rugged, reliable Mosfets in the output. ETI 499 March 82

**CYLON VOICE** EA December 80

**\$19.95**



Sound like Darth Vader

**ANALOGUE AND DIGITAL STORAGE CRO KIT** **\$189.00**



Store and record non-repetitive Analogue Signals. EA March 81

**TV CRO ADAPTOR** **\$38.50**

Includes Plug Pack. EA August 80



**VOICE CANCELLER**

**\$22.50**



Ever wondered how your voice substituted for your favourite vocalists would sound, well now it's possible! You can cancel out the lead vocal on almost any stereo record and substitute your own voice or musical instrument. EA April 82

Oct 82 ETI

## ETI'S BRILLIANT NEW DIRECT-CONNECT COMPUTER MODEM



Employs unique 'Commutated Filter' design overcoming virtually all the problems involved with conventional modems. Super flexible unit facilitates communications between computers over cables, the telephone network and radio links. Unit connects to a standard RS 232 interface and is capable of both 1200/75 Baud and 300/300 Baud transmission and reception. ★ Line switching; answer and dialing facilities on board.

**Our Price**  
**\$169.00**

**EXCLUSIVES:** ★ Plated through, double sided PCB ★ Complete set of IC sockets ★ Kit requires 85 1N914 Diodes for programming these are included ★ Ceralock resonator and matching balanced load capacitor used for long life and high accuracy ★ Telecom approved isolating transformer and Reed relays included

**LOUD SPEAKER PROTECTOR**

ETI 455 March 80



**\$32.50**

**CAR ALARM**  
**\$29.00**


This Car Alarm uses the battery earth strap as a sensor to detect when a "courtesy" light or other electrical load occurs when a thief enters a vehicle. The circuitry is simple and immune from false triggering problems. ETI July 81




**10-15V EXPANDED SCALE V-METER**

ETI 159 December 81

**\$26.50**



**CORE BALANCE RELAY** ETI 567

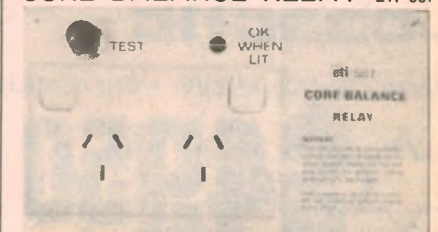

**\$44.50**

425 High Street, Nortncote 3070, Melbourne, Victoria. Ph (03) 489 8131. Telex No. 38897

Now open at 48-50 A Beckett Street, Melbourne



# Shortwave Scene

by Arthur Cushen, MBE



## BBC announces major expansion plans

Following close on the 50th anniversary of the BBC External Service comes the news of the expansion of transmitting facilities and plans to link relay bases by satellite.

The BBC transmitting sites in the United Kingdom are located at Daventry (in operation since 1932), Rampisham, Woofferton and Skelton. The Woofferton site is mainly used by the Voice of America and schedules most VOA programs from the United Kingdom. Skelton and Rampisham carry mainly World and External Service programs, while Daventry, the largest site, programs many of the foreign language broadcasts heard from London.

Daventry now covers 250 acres with an extensive array of antennas, and 14 transmitters; four 250kW, eight of 100kW and two of 30kW, used for single sideband transmission of programs to overseas relay bases.

The Rampisham transmitting site is located in south-west England not far from the sea and covers 190 acres. In the transmitting building there are four 250kW transmitters and two 100kW transmitters, covering 35 shortwave frequencies. Rampisham is in the middle of massive modernisation and over the next five years its four 250kW transmitters will be replaced by eight 500kW transmitters, new antennas installed and the whole station brought under computer control.

The first satellite link between Bush House in London and an overseas relay base has been in operation for some months with the transmitters in Cyprus being linked to the London studios. This satellite link has now been extended to Singapore and the BBC plans to link the Ascension and Antigua sites when facilities become available.

### 31 METRE BAND EXPANSION

As well as stations moving into the section 9775-10000kHz, there has been an increasing use of the band between 9400-9500kHz in recent months. The BBC has been operating for more than 30 years on 9410kHz but now this part of the band is becoming congested as countries realise that there are several

vacant channels. On 9420kHz Athens, Greece is noted at 1900 with a broadcast to Europe which includes English 1920, French 1930 and German at 1940UTC. The frequency is also used at 2000UTC in European languages, while at 2100 and 2200 there are transmissions in Greek to Australia. Radio Tirana, Albania has been using 9430kHz at 2000 for a broadcast in Portuguese and the nearby channel of 9440kHz is used by Israel at 2000 for a broadcast in English. Cairo uses 9475kHz with English 0200-0330, while Trans World Radio at Monte Carlo uses 9495kHz from 0725UTC with gospel broadcasts in English. Many other frequencies in this section are used by Radio Moscow in its various language services.

### NEW SERVICES

Radio France International recently commenced a service to Latin America now heard on a regular basis from 2300-0100UTC. The languages broadcast are Spanish 2300, Portuguese 2330, French 0000, and Spanish at 0030UTC. The frequencies used are 9785 which replaces 9790kHz; 11965, 11995 which are audible in this area and 6085 and 6140kHz.

Radio Nacional, Brazilia has introduced a new language schedule and now broadcasts at 1800-1900UTC in English on 15435kHz, 1900-2000UTC in German on 15435 and 2100-200 in German on 17720kHz. Broadcasts to North America in English at 0200 are on 15290 and 17830kHz; and to South America at 0000UTC in Spanish on 9665kHz.

Radio Afghanistan has retimed its English service to 1000-1030UTC and is received on 21460, with 6230 and 17720 also carrying the transmission. The station suffers jamming splatter from 21455kHz and according to John Mainland reporting in the NZ DX Times, they have also announced the use of 15255kHz.

Radio Nacional in Caracas, Venezuela,

has extended its schedule and is using 9530kHz for a broadcast to Latin America and the Caribbean areas. The BBC Monitoring Service reports that the schedule is announced as 0100-0200, 0300-0400, 1100-1200 and 1800-1900UTC.

### NEW FREQUENCIES

**BULGARIA:** Radio Sofia has been heard on 11720kHz with English 0400-0500UTC. This is a new frequency which carries the broadcast to North America.

**CZECHOSLOVAKIA:** Radio Prague is using 11950kHz for English at 0300-0350UTC, in addition to 9610kHz. The broadcast to Australia in English at 0730-0800UTC is on 11855, 17840 and 21705kHz.

**GREECE:** Athens has been heard on 7095kHz 0500-0600 in Greek and the transmission continued in Turkish to 0615UTC. Another new frequency is 9420kHz noted at 2000UTC.

**ISRAEL:** Jerusalem has been heard on new frequency of 9440kHz at 2000UTC with an English transmission. The broadcast is also carried on 9009, 9815, 11640, 15585 and 17685kHz.

Notes from readers should be sent to Arthur Cushen, 212 Earn Street, Invercargill NZ. All times are UTC (GMT). Add eight hours for WAST, 10 hours for EAST and 12 hours for NZT. In areas observing daylight time, add a further hour.

### DO YOU WANT TO BE A RADIO AMATEUR?

The Wireless Institute of Australia, established in 1910 to further the interests of Amateur Radio, conducts a Correspondence Course for the A.O.C.P. and L.A.O.C.P. Examinations conducted by Telecom. Throughout the Course, your papers are checked and commented upon to lead you to a successful conclusion.

For further information, write to

**THE COURSE SUPERVISOR  
W.I.A. (N.S.W. DIVISION)**

P.O. BOX 1066  
PARRAMATTA, N.S.W. 2150.



REVIEWS OF RECENT

# Records & Tapes

CLASSICAL • POPULAR • SPECIAL INTEREST

## ELLY AMELING SINGS DEBUSSY & FAURE: Delightful ..."

**DEBUSSY, FAURE.** Nine songs by each of these composers sung by Elly Ameling (soprano). Dalton Baldwin, accompanist. CBS Analogue Stereo disc CX 74027.

On the back of the sleeve of this delightful recital are some very perceptive notes by Ned Roram on the difference between German lieder and French melodies, their form and style of performance. The record consists of songs by Faure and Debussy and readers may be interested to learn from Mr Roram, what one thought of the other. Debussy was 17 years younger than Faure yet was outlived by the latter. During their creative periods, it was the younger man who wrote the most memorable music.

About this time, the creation of the lieder was slowly fading. There remained, of course, Richard Strauss, Hugo Wolf and some minor figures but few musicians will deny that the dominating songwriters of the 19th century were Faure and Debussy.

At this point the one's opinion of the other might interest readers. The older man complained; "Never speak to me of Debussy. I don't want to know there is a Debussy. If I like Debussy, I can no longer like Faure. How can I then be Faure?"

Debussy's only recorded remark about Faure was: "We heard a Ballade by the Master of Charms almost as lovely as pianist Hasselmans herself, who kept having to straighten her shoulder straps as they fell down at every scale. I somehow relate these gestures with the Music of Faure himself. The play of fleeting curves that is the essence of his music can be compared to the movements of a beautiful woman, without either suffering from the contrast."

The two most important lieder writers were Schubert and Schumann. Strauss and Wolf came later. Faure and Debussy led in melodic composition. There is



evidence to suggest that, music apart, the dislike between Debussy and Faure sprang from jealousy over a woman. I think it was more due to Faure's recognition of the sensuous beauty and wit of Debussy as superior to his own, however great his own talent may be.

Germany and France were the only two European countries to excel in songwriting — if, of course, one omits Moussorgsky. For 30 years Schubert and Schumann monopolised the field. They were followed later by Brahms. Importantly the French chose their own countrymen as librettists, often Verlaine, while the Germans chose anyone that came their way, however banal. This is not to deny the beauty of the settings of some of the more crass words.

Being mostly strophic, the German lieder were more easily remembered — and delivered — mostly by a technique of contrast than the more elusive French rivals, who proved much more difficult go to listen to. And importantly, it was Faure that freed the accompanist from being a mere support or descriptive shadow of the words.

Different language setting produced entirely different styles, the stanza-like settings of so many lieder being no match for the slippery elusiveness of a poet like Verlaine.

My reason for using such a long introduction to the disc in question is that it is so full of delights — nine songs of Debussy and the same number of Faure, all performed so delightfully that it leaves me nothing but the highest praise to use in reviewing it. Elly Ameling's clear, sensitive soprano, never forced on the highest notes, and always capable of retaining its alluring quality in the lowest, is used with complete understanding of the material concerned.

So what can I write except to encourage all with French tastes to acquire it as soon as possible?

The analog sound is first class, always clear and expressive. Baldwin is a competent accompanist (J.R.)

## BEETHOVEN/ASHKENAZY — "Intriguing ..."

**BEETHOVEN — Symphony No. 5 in C Minor. Leonora Overture No. 3. Philharmonic Orchestra conducted by Vladimir Ashkenazy. Decca chromium dioxide Cassette. KSXDC7540.**

After the justified acclamation received by Carlos Kleber's magnificent performance not so long ago, it must have needed great courage to issue another by different artists so soon after. But Ashkenazy's reading is so different that I can follow Decca's reasoning.

Ashkenazy's is an exciting if sometimes odd interpretation. There are moments

when it can only be described as over-expressed, with little pauses, unexpected accents, agogic and otherwise. Much of it is unlike his piano style, yet there is a faint air of a pianist's reading about the whole work. However, somehow or other, most of it comes off splendidly.

Countless orthodox performances of the Fifth are obtainable. Some are better than others. Kleber's overwhelmed: Ashkenazy's intrigues. The only way I can convey all I want to say is to tell you to go and hear it for yourself. It is on a chromium dioxide cassette; the sound is excellent, the orchestral balance faultless and, different though it might be, it is still a fine issue.

Reviews in this section are by Julian Russell (J.R.), Neville Williams (W.N.W.), Leo Simpson (L.D.S.), Norman Marks (N.J.M.), Greg Swain (G.S.), and Danny Hooper (D.H.).

It would be unfair not to add that Ashkenazy's little deviations have no hint of ever being just show-offs.

The Leonora No. 3 makes an excellent fill. (J.R.)

**ELGAR — Violin Concerto in B Minor.** Itzhak Perlman (violin) with the Chicago Symphony Orchestra conducted by Daniel Barenboim. DGG Digital disc 2532035.

How pleasant it is to hear such sweetness again, sweetness posed unsentimentally upon a solid base of form. There have been many fine recordings of this concerto down the years, starting with the renowned performance by the composer and the then boy genius Yehudi Menuhin. It reflected complete understanding between the man and the boy, neither of them freaks. Menuhin was a typical prodigy who later went through a period of musical uncertainty. Elgar, despite his association with the church, was not above dropping in at the corner pub on a Saturday to place a bet with his illegal SP operator.

Since then, every violinist of note — and a few of the others beside — have paid it their homage and it even achieved the distinction of becoming popular in Germany. (Richard Strauss was a great admirer of Elgar.)



Violinists of all nationalities have recorded it but have not seemed to enjoy the honeyed sweetness of their own playing so much as this young Israeli player. Here is happiness and enjoyment not often heard in this generation; emotion filled but never slick.

Perlman never advertises his virtuosity: it is part of him. His technique is in the early Heifetz class, although the temperature is much higher.

A digital recording, it is rich in detail although I would have been a trifle happier had the engineer not placed the soloist quite so far forward. A few of Elgar's delightful orchestral touches are obscured because of this.

One might describe the first movement as the performance one has always wanted to hear but never had the luck to do so. Barenboim and the Chicago provide impeccable support. Perlman

## BEETHOVEN Piano Concerto "... a good recording"

**BEETHOVEN: Piano Concerto No. 4 in G Major, Op. 58.** Rudolf Serkin with Seiji Ozawa conducting the Boston Symphony Orchestra. Digital stereo, Telarc DG-10064. [From P. C. Stereo, PO Box 272, Mt Gravatt, Qld 4122. Phone (07) 343 1612].

I found this a very enjoyable record and I feel that it would appeal, not only to those to whom the work is familiar but also to those normally prefer music of a lighter kind.

Let me hasten to add, however, that this fourth concerto is by no means "heavy" music. It is melodic, sometimes pensive, sometimes stirring, but always enjoyable.

An earlier Telarc recording by Serkin/Ozawa and the same orchestra — The Emperor Concerto — was a brilliant success but this one falls into a quite different category, if only because of the nature of the music.

The first movement, Allegro moderato, plays for 20 minutes, 15 seconds. It has about it a meditative quality, which certainly suited my mood when I put it on the turntable for the first time. I just wanted to go right on listening!

The slow movement, Adante con moto, is played very eloquently and, at times, subsides to such a low level that it

always seems to be at his best when collaborating with his fellow-countryman.

Would it be safe to acclaim Perlman as the finest violinist playing today. I realise the vastness of the area the question covers but am tempted to say yes.

Now for a few ungrateful, churlish quibbles. Some of the phrasing is not always what you're used to and may surprise you. But I think this surprise will be accompanied by delight. Some of the tempos are a thought faster than usual, to my taste for the better. Another enthusiastic recommendation. (J.R.)

☆ ☆ ☆

**JANACEK — Sinfonietta.** Taras Bulba. Philips stereo cassette, played by the Rotterdam Philharmonic Orchestra conducted by David Zinman. 7300 874.

By now, most musicians have become used to Janacek's apparently crude, yet in reality highly sophisticated style. Chiefly responsible for this is the frequent performance of his unique operas and the Sinfonietta recorded here.

Janacek's musical path departs far from the general progress of Central European or French music. He deliberately avoids classical — or romantic — form, has a unique style of scoring, uses polytonality more freely than most "regular composers" and harmonises in a way one



demands completely quiet listening conditions. Fortunately, the Telarc pressing is equal to the demands it makes on the record's own noise level.

The final movement, Rondo: Vivace, emerges from its quietest moment and exploits the dynamic range of the pressing in the other direction — this time without any suggestion of harshness or overload.

And when the final, climatic chords die away, you'll probably say as I did: "that is a good recording" — the music, the performance, the distinct and uncluttered sound of sound of the piano, the unity and tone of the orchestra, and the quality of the record itself. And, for good measure, it comes in a handsomely produced double-fold jacket with generous notes.

My tip is that it will find wide acceptance, alongside the already popular "Emperor". (W.N.W.)

can only describe as unique.

We have many recordings of the Gewandhaus Orchestra of Amsterdam but few — at least in Australia — of the Rotterdam group. Here is a splendidly disciplined Rotterdam recording under the firm direction of David Zinman. This discipline is obvious in the very first allegro. Zinman avoids making the opening brass passages sound like a fanfare, as they so often do, but slurs them into a more conventional but still highly unusual shape. He gives us a lovely slow movement, his reading reflecting the true spirit of Janacek.

The work is in five movements — another eccentricity in Janacek's nomenclature — and each movement is subdivided into many parts, calling for swift changes in tempos and, especially, in rhythms. Zinman brings the whole five together admirably. The result is always logical, but does he capture the true "raw" spirit of Janacek? Of this I'm not quite sure.

Almost as well known as the Sinfonietta is Taras Bulba on the reverse side. Janacek called its three movements a rhapsodie. They may be rhapsodical in parts but are much more like a suite — a suite of death, for one occurs in all of the three pieces. They all have a program about which the composer was very reticent and much of the literary side must

be guessed. But, as a rule, the title gives a plain enough clue to make an educated guess at the pictorial contents.

Janacek uses a huge brass section in his large orchestra — 12 trumpets, two bass trumpets, four trombones, two tenor tubas and a bass tuba. Of these, he sets apart from a more conventional orchestra nine trumpets, the bass trumpets and tenor tubas with timps added. These are used only at the beginning and, with the rest of the musicians at the end of the work.

The reason for this odd combination is easy for a musician to understand. Janacek had been commissioned to write some fanfares for a gymnastic display in Prague. After their use for this function Janacek was as reluctant as almost any other major composer to let such themes go to waste and used them again in *Taras Bulba*.

The first piece is quiet, in the form of a lament — “The Death of Andrii” — with some of it unmistakably like the more lyrical bits of “Jenufa”. There is also some obvious battle music and a lament on the death of a son at this father’s hands.

The second movement, “The Death of Ostap”, a vivid account of death and torture, is full of real, not simulated turmoil.

The third is titled (by Janacek?) “The Prophecy and Death of Taras Bulba” which graphically describes just that.

Zinman conducts the work sanely and, despite temptations, without over-expression. And the Rotterdam Orchestra clearly needs more exposure to the public.

The sound quality is excellent. (J.R.)

☆ ☆ ☆

**THE VOICE OF IRELAND.** Ruby Murray.  
World Record Club WC 3270.

Originally recorded in mono by Capitol, this record has been given the “Duophonic” treatment to enhance its playing on stereo equipment; but, like a lot of these “enhancements”, it does little to provide much in the way of stereo image.

That comment aside, it is a delightful record, with a dozen favourite Irish songs sung by a lady with a delightful voice. The titles are: *The Green Glens of Antrim — When Irish Eyes Are Smiling — It’s A Great Day For The Irish — The Mountains Of Mourne — If You’re Irish Come Into The Parlour — Galway Bay — Too-Ra Loo-Ra-Loo-Ral — Dear Old Donegal — How Can You Buy Killarney? — Phil The Fluter’s Ball — Danny Boy — Teddy O’Neil.*

The backing from Ray Martin’s Orchestra helps make for an enjoyable musical experience. (N.J.M.)

## The PACHELBEL CANON “You will be intrigued ...”

**THE PACHELBEL CANON.** The Canadian Brass plays Great Baroque Music. Produced by Jay David Saks. Stereo, RCA ARL1-3554.

If you are a stranger to the Canadian Brass, or to these selections in particular, you will be startled by the very first notes of this recording. From that organ evergreen, Bach’s “Tocatta and Fugue in D minor”, the opening chords emerge in the piercing sound of brass; and, just when you’re wondering how they’ll cope with the organ pedal notes, the tuba provides the answer in a most convincing manner.

My guess is that, from then on, your intrigue will grow as you listen through the rest of the program. You will be fascinated by the technique of the five players — all resident artists at the Banff Centre in Toronto (when they’re not on tour in Canada, America or overseas). You will be amazed at the way phrases are transferred, with computer-like precision from player to player.

Aided by the timbre of the instruments — two trumpets, French horn, trombone and tuba — and by the mirror-clear stereo image, you will hear the structure of the works more distinctly than is ever likely to be the case from a conventional large organ in a conventional large environment.

Most of the tracks are transcriptions from the organ works of J. S. Bach: *Tocatta and Fugue in D Minor — Sheep May*



*Safely Graze — “Gigue” Fugue — “Little Fugue” — Wachet Auf — Passacaglia and Fugue in C Minor.* Other tracks, one of them the title track include: *Canon (Pachelbel) — Toccata (Frescobaldi) — Suite from “Water Music” (Handel).*

The detailed notes point out that transcriptions from the Baroque era do not transgress precedents set by the composers themselves and constitute a vital and challenging component of the Canadian Brass’ extensive repertoire.

The notes also make an admission which answers the question: can that sound be produced by just five instrumentalists? for “Wachet Auf” at least, they resorted to overdubbing, to multiply their resources.

In approaching this recording, one might be tempted to compare it with a transcription made for synthesizers but such comparison is not valid. This is a performance by real musicians, playing real instruments in real time. Nor is it a case of choosing between it and an organ performance. You’ll be the richer for having heard both!

Last but not least, the quality and tonal balance is first rate. (W.N.W.)

## A CHORAL “1812”

**TCHAIKOVSKY:** 1812 Overture, choral version. **MARCHE SLAVE.** **BEETHOVEN:** Wellington’s Victory. Vienna Philharmonic Orchestra; Chorus of the Vienna State Opera; directed by Lorin Maazel. Digital stereo, CBS D-37252.

To the best of my recollection, this is the first album I have ever seen, in which the jacket notes start off by excusing the contents: “It is well nigh impossible to find anyone who is willing to put in a good word for the three works recorded here.”

As if to reinforce that sentiment, Julian Russell, who had received the recording for review, passed it over to me with a remark to the effect that the “1812 Overture”, which dominates the cover design, is not held in high regard in classical music circles.

“You better do it for your audiophiles!”

In his jacket notes, Lorin Maazel suggests that the prejudice is due largely to “frequent performances by third-rate ensembles . . . in questionable acoustic surroundings”. And if you take a stand against the 1812, then the other two are likely to be rejected along with it.

Yet, Maazel finds merit in the works, especially as played by “The magnificent Vienna Philharmonic”.

Such argument aside, the 1812 Overture is no stranger to technically orientated audiophiles — a fact that has not been wasted on CBS. The album is prominently marked “Digital”, “Audiophile Pressing”, having been recorded on a Sony PCM 1600 recorder, edited with the help of a Sony DAE 1100, and produced on the CBS Discomputer system.


The 1812 Overture you will know, with its mix of orchestra — plus choir in this case — bells and cannon. Beethoven’s Wellington’s Victory contains a similar noisy — and somewhat tongue in cheek

# ROD IRVING ELECTRONICS

**\$\$\$ SAVE MONEY — USE OFF  
PEAK STD RATES \$\$\$**

For your convenience we will accept phone bankcard orders until 6.30pm.  
"PHONE THE HOT LINE AND TALK A DEAL WITH ROD THE  
COMPONENT DISCOUNTER . . . ONLY BETWEEN 6-6.30pm"  
**I WANT YOUR BUSINESS!!"**

CUDLIPP **\$12.00**




A fascinating Electronic Cricket with just two ICs. The Cudlipp can be used to bug your Home, Office or Board Room. Great fun EA February 82

**ON SCREEN GRAPHIC  
ANALYSER \$109.00**

The On Screen Graphic Analyser links your hi-fi to your TV set.  
Features:  
Six colour bar graph display (Standard PAL receiver).  
Ten vertical bars in the display corresponding to the 10 octave bands.  
Gives you the best sound quality your system can deliver.

**FM WIRELESS MICROPHONE  
\$8.50**

HOBBY ELECTRONICS May 81

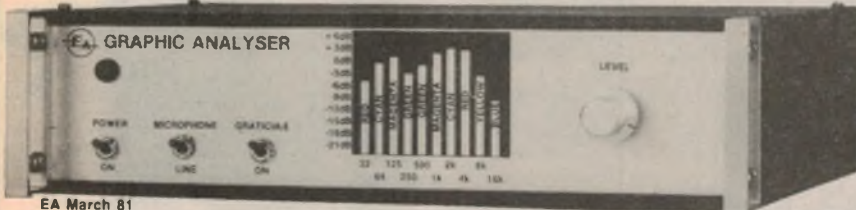

EA March 81

**CAR BATTERY  
MONITOR \$9.50**

Flat Battery! Don't get left out in the rain. Install a voltage monitor which monitors the state of your battery at a glance. EA. October 80.



**UNIVERSAL RELAY BOARD  
\$13.50**

Operating a relay to switch heavy current or mains voltages is a common requirement in electronic control applications. This project permits a relay to be switched in a variety of ways and from a variety of inputs. ETI May 81



**LOW FUEL INDICATOR EA March 81  
\$16.50**



**AM TUNER \$99.00**

ETI 475 September 80



Includes plug pack and punch metal work

**\$9.50**

**MINI  
DRILL  
SPEED  
CONTROLLER**

Here's an easy to assemble project for a simple speed regulator for miniature DC electric drills. ETI July 81



**ELECTROMYOGRAM \$89.00**

ETI Top Projects



**SLOT CAR POWER SUPPLY  
\$19.50**

ETI December 81




**SERIES 4000 SPEAKER KITS**

Speakers and crossovers \$450  
Speaker boxes \$249  
Crossover kits \$189  
Complete kit \$679



**EPROM PROGRAMMER EA July 80**

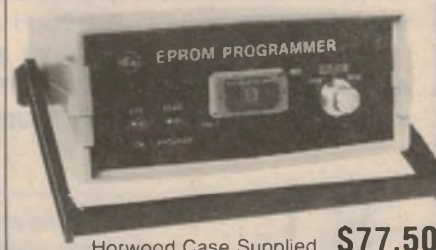

Horwood Case Supplied **\$77.50**

**HUMIDITY METER. \$22.50**

ETI 256



**BRIDGING  
ADAPTER**

ETI March 82

**\$10.95**



**SLIDE CROSS FADER \$85.00**

EA November 81



# 64K S100 STATIC RAM


**NEW!**

**\$369.00 + S.T.**

**NEW!**

KIT

LOW  
POWER!

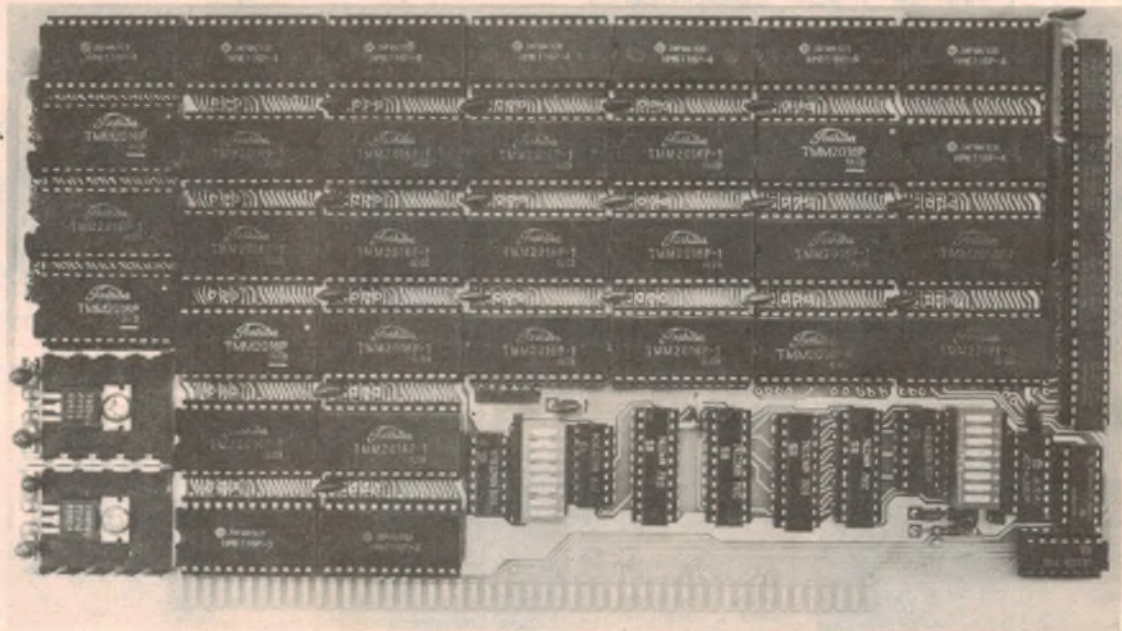

RAM  
OR  
EPROM!

BLANK PC BOARD WITH  
DOCUMENTATION \$95 + S.T.

SUPPORT ICs + CAPS — \$30 +  
S.T.  
FULL SOCKET SET — \$25 +  
S.T.

## FEATURES:

ASSEMBLED AND TESTED **ADD \$40**

- ★ Uses new 2K X 8 (TMM 2016 or HM 6116) OR MK58725P RAMS.
- ★ Fully supports IEEE 696 24 BIT Extended Addressing.
- ★ 64K draws only approximately 500 MA.
- ★ 200 NS RAMs are standard. (TOSHIBA makes TMM 2016s as fast as 100 NS. FOR YOUR HIGH SPEED APPLICATIONS.)
- ★ SUPPORTS PHANTOM (BOTH LOWER 32K AND ENTIRE BOARD).
- ★ 2716 EPROMs may be installed in any of top 48K.
- ★ Any of the top 8K (E000 H AND ABOVE) may be disabled to provide windows to eliminate any possible conflicts with your system monitor, disk controller, etc.
- ★ Perfect for small systems since BOTH RAM and EPROM may co-exist on the same board.
- ★ BOARD may be partially populated as 56K.

FULLY SUPPORTS THE NEW  
IEEE 696 S100 STANDARD  
(AS PROPOSED)

16K STATIC RAMS?

FOR 56K KIT  
\$329 + S.T.

S.T.  
**20%**

The new 2K X 8, 24 PIN, static RAMs are the next generation of high density, high speed, low power, RAMs. Pioneered by such companies as HITACHI and TOSHIBA, and soon to be second sourced by most major US manufacturers, these ultra low power parts feature 2716 compatible pin cut. Thus fully interchangeable ROM/RAM boards are at last a reality, and you get BLINDING speed and LOW power thrown in for virtually nothing.

RITRONICS WHOLESALE PTY LTD,  
425 HIGH STREET, NORTHCOTE, VIC, 3070.  
48-50 A'BECKETT ST, MELBOURNE 3001. TEL 347 9251

— statement of patriotism and victory for the English, while Tchaikovsky does it again in Marche Slave for the Slavic heroes of the Turko-Serbian war.

This is not a performance for gentle souls who like a soothing or dignified musical music. What it will do is to make you wonder how a lone stylus in a groove can reconstruct such an enormously complex sound, and how loudspeakers can propagate it without flying apart half-way through!

It's an impressive disc — provided you're receptive to the contents. (W.N.W.)

☆ ☆ ☆

**THE NUN'S STORY.** Original motion picture score, composed and conducted by Franz Waxman. Stereo, Stanyan Records, POW-4024. Distributed by RCA.

This is another of the Stanyan series dated 1982 and featuring new performances of notable motion picture scores. Stanyan 4023 features "Gone With The Wind" (Max Steiner); 4025 features "Spellbound" (Miklos Rozsa); 4026 is "For Whom The Bell Tolls" (Victor Young).

Although Franz Waxman is named as the conductor of this performance, the orchestra itself is not identified. However, in other respects, the jacket notes are informative, with the credits of the film but, more particularly, focusing attention on Franz Waxman and his musical contribution to this and many other Hollywood features. Issue of the new album corrects the anomaly whereby Kathryn Hulme's novel and the film remained in popular demand but the original soundtrack album had long been out of print — virtually a collector's



item according to our information.

The music generally is in strong contrast with that of "Gone With The Wind". Whereas that score could be described as "of symphonic proportions", Waxman's themes for "The Nun's Story" are more varied, more introspective and more a direct reflection of Sister Luke's (Audrey Hepburn's) emotions:

Prelude and Credo — Leaving — The Holy Order — Farewell — Ave Maria Stella — I Accuse Myself — Haircutting & Gran Coro — Departure & The Congo — The New Room — Killing Of Aurelie — War Report — Last Meeting & Finale.

For those who enjoyed "The Nun's Story", the titles and the music of the 12 tracks should bring further pleasure. But, in any case, the score which won an Academy Award nomination is pleasant listening, while the album is a memento of one of the musical greats of the film world. The technical sound quality is entirely satisfactory. (W.N.W.)



**MARIJOHN WILKIN, One Day At A Time.** Word TWE 6005. The Word 20 Series. From Word Records Aust, 18-26 Canterbury Rd, Heathmont, Vic 3135. Phone (03) 729 3777.

This is another of the series from Word Records, featuring the 20 best from a number of the best known Gospel artists.

All the tracks are from Marijohn Wilkin's own pen, with a great number of her songs being written for such artists as Johnny Cash and Joan Baez.

Most of the tracks are sung in a quiet country and western style, some of the titles being: One Day At A Time — Behold The Man — God Is Love — Back In The Fold — Where I'm Going — Speak Louder — Let The Spirit Work In Silence — You Still The Troubled Waters — It's A Brand New World.

The quality is good, without any fancy dynamics, and the sleeve carries an interesting pocket biography of a versatile artist. (N.J.M.)

**RECORDS SUPPLIERS:** For information on World Record Club albums, contact the Club at 605 Camberwell Rd, Hartwell, Vic 3124. Tel. (03) 29 3636. They should not be confused with Word Records, who distribute mainly devotional albums, principally through religious booksellers.

## S-100 Bus, Z80A™ Based System With DMA Transfer and Memory Management on an IEEE Spec 696.1/D2 Board

### FEATURES:

- Single or Double Density Floppy Disk controlling up to four 8in or 5¼in floppy disk drives in either DMA, interrupt or Programmed I/O mode.
- 64K bytes of onboard Dynamic RAM with Memory Deselect of 4K bytes to 64K bytes under software control.
- Four Channel Direct Memory Access Controller.
- Two Serial I/O channels with one channel programmable in either DMA, Interrupt or Programmed I/O mode.

- Two Parallel I/O channels with one channel programmable in either DMA, Interrupt or Programmed I/O mode.
- Memory Management of 16 Megabytes of system memory
- Eight Vectored Priority Interrupts chained together with I/O Interrupts for use with Z80 Mode 2 Interrupts.
- Provisions for either a 2K byte or 4K byte onboard EPROM. (Monitor in a 2K byte EPROM supplied with board).
- CP/M™ and MP/M™ operating systems available, TurboDOS™ available soon.
- Turbo-Disk™ Implementation included.

### ALSO:

256K byte Dynamic Memory Board, 16K increments — fully bank selectable compatible with Cromix™, CP/M2.2™, Alpha Micro and other major systems.

**ABSOLUTE ELECTRONICS** 483 CENTRE ROAD, BENTLEIGH, VIC 3204 Phone (03) 557 3971

**WE STOCK:** 74LSTTL, Capacitors, CMOS, Connectors, Diodes, Discrete Devices, Kits, LEDs, Linear Devices, OPTO-Isolators, Potentiometers, Rectifiers, Resistors, Sockets, Transformers, Z80/6800 CPU and support ICs, Zener Diodes.

**We review a remarkable portable:**

# Computing on the go with the Otrona 512

The Otrona 512 is a portable computer that can be picked up and carried around like a briefcase but is a full-featured disk-based system, offering a wide array of features and software.

by **PETER VERNON**

The July, 1982 issue of the US magazine "Microcomputing" contains the story of David Kline, a free-lance journalist who used a portable computer to report on guerrilla operations in Afghanistan. With the help of the computer he was able to compose and file stories via the international telephone system, many hours ahead of his colleagues with more mundane equipment. His tale is a major boost for the portable computer.

The Otrona 512, imported in Australia

by Elmeasco Instruments, is a "second generation" portable computer. With the concept already proved by the Osborne the designers added features such as high capacity disk drives and an 80-column screen while at the same time reducing the weight of the system.

Based on a Z80A 8-bit microprocessor running at 4MHz, the Otrona includes 64K of RAM. Disk and screen access is by way of a 9517 direct memory controller and is exceptionally fast, a feature which

allows full use of the extensive graphics capabilities of the machine.

For transport, the Otrona 512 is a compact 30 x 14 x 38cm, (WxHxD) weighing about 8kg. In this mode the carrying handle doubles as a clamp holding the detachable keyboard in place over the dual disk drives and 14.5cm (diagonal) green phosphor CRT screen. The cabinet is moulded of white, impact resistant plastic.

When unfolded the handle acts as a support for the CRT and disk unit, and allows the keyboard to be unlatched from the front panel. A short removable cable connects the keyboard to the computer itself. We are told that this cable is a standard US telephone connector, available in several different lengths.

The keyboard is a full alphanumeric format, conforming to the IBM Selectric arrangement with additional cursor control and programmable multi-function keys. There is no separate numeric keypad, but Otrona do provide software to re-program the keyboard to create numeric keys in a standard calculator style layout. Unfortunately, no provision is made for re-labelling these keys, and this method must be considered a stop-gap at best.

Two built-in "slimline" minifloppy disk drives provide mass storage for the system. These are double-sided, double density units, each capable of storing 360K bytes when formatted for CP/M.

The video screen is capable of displaying upper and lower case characters (with descenders) in either 24 lines of 80 characters each or 24 lines of 40 double-sized characters. An extensive range of video attributes can be programmed, including high-lighted and half intensity characters, inverse video, over-strikes, underlines and sub- and superscripts.





A demonstration program supplied with the review machine illustrates these features, and includes a sample of the non-English alphabet and mathematical character sets. These capabilities, however, are seen to best advantage on a larger video monitor.

Graphics are also supported by the Otrona 512. Graphics resolution is 320 horizontally by 240 vertically, which is higher than many full-sized microcomputer systems.

At the rear of the computer are connections for peripheral equipment. Two RS232C serial ports are provided, with baud rates separately selectable from 75 to 19,200 bps. An RCA socket provides for connection of an auxiliary video display, without the necessity for any adapter.

Also at the rear is the mains input voltage selector (120-240VAC), fuseholder and power switch. A battery adapter and battery pack is optionally available, and plugs into a second panel connector. An expansion board can also be plugged into a slot on the rear panel.

### Switching on . . .

Readying the Otrona for work is a fairly simple matter. The carrying handle is unlocked by two pushbutton latches (which seem a little balky and stiff to use). When unlatched the keyboard hinges downwards, connected by a thin cable which can be up to two metres long (apparently for the benefit of those using a larger video display).

If the system is switched on without a disk in Drive A the computer displays "no disk in place . . ." and enters a terminal emulation mode. A number of communications protocols can be implemented, allowing the Otrona to be used for data communications with mainframe computers. An acoustically-coupled modem is available separately.

As soon as we switched on we used the "set up" mode to check the terminal parameters. Pressing Control/Esc enters this mode, displaying several lines of status information at the bottom of the screen. The battery-powered clock and calendar were functioning, already set to the correct time and date.

Other keys, labelled on the keyboard, allow the user to vary the brightness of the display, the pitch and volume of the keyboard audio feedback, (four different click sounds plus "off") and the communications rates of both serial ports, (called printer and communications although they are full-featured ports not restricted to these uses) and to turn the keyboard bell on or off.

All these features are fully described in the opening chapters of the manuals

which come with the system. Setting up instructions and details of changing the mains input voltage, power connector and fuse are also given. With the exception of the incomplete "programmers' reference guide", the manuals supplied with the Otrona are readable and easily understood.

### Supplied with software

Software supplied with the Otrona 512 includes CP/M 2.2, BASIC-80, WordStar Plus, Valet 1.1 and Charton, plus a disk of utilities and demonstration programs. A powerful Monitor program, including diagnostic routines, is contained in ROM in the machine.

The language supplied with the Otrona 512 is MBASIC, the CP/M version of Microsoft's BASIC-80 V5.0 interpreter. This is a powerful, full-featured disk version of Basic conforming to the ANSI standard. Users with experience of other versions of Microsoft Basic will have no trouble adapting, and the extra features of the language greatly simplify the writing of large applications programs.

MBASIC strings can be up to 255

together, with global variables declared by the statement COMMON. Variables can also be passed from one program to another, so that programs which are too large to fit into RAM can be run by calling in sections from disk as required.

Disk file handling capabilities are also included in the language, allowing both sequential and random access files to be created or read from Basic. Assembly language programs are also fully supported; the statement CALL allows assembly language routines to be executed from a given address, and allows variables to be passed to the routine. The USR statement is also available.

Comprehensive graphics statements are provided, to draw and erase points and lines, fill areas of the screen with patterned characters and to create new fill patterns, and to draw circles and arcs. Text can be laid over the graphics display or used in any combination with graphics, and the active plotting areas can be confined to any selected area of the screen.

Experienced programmers will appreciate the powerful editing functions

### Otrona 512: vital particulars

Processor:	4 MHz Z80A
RAM:	64K
ROM:	4K containing Monitor and diagnostic programs.
Interfaces:	Two RS232C serial ports, 75 to 19,200 bps.
Keyboard:	IBM Selectric lay-out with programmable keys.
Display:	80 x 24 lines, 40 x 24 lines, 320 x 240 dot graphics.
Peripherals:	Two disk drives built-in, 360K per disk STD expansion board available.

characters in length and variable names can be up to 40 characters long. In addition to integers and fixed point constants, MBASIC supports floating point numbers, in either single or double precision (16 significant digits). Hex and octal constants are also supported.


An attractive feature of the language is the use of variable type declarations, allowing the programmer to specify which variables will be stored in double precision, single precision etc. Single precision stores and calculates numeric values to eight significant digits and double precision allows 16 significant digits.

Control structures include the familiar IF . . . THEN . . . ELSE and also WHILE . . . WEND. Programs can be CHAINED

and the extensive debugging and error handling statements provided by MBASIC. All in all, MBASIC appears to be an excellent language for business and scientific applications, although unfortunately it lacks matrix manipulation statements. MAT statements, provided in some versions of Basic, considerably simplify the task of writing scientific application programs, but are unlikely to be missed in business applications.

Also included with the Otrona is WordStar Plus 1.0 (by MicroPro International). This CP/M word processing system is considered by many to be the most powerful word processor in wide use, and particular enhancements to the Otrona version add even more appeal.

## SINGLE BOARD Programmed Logic Controller

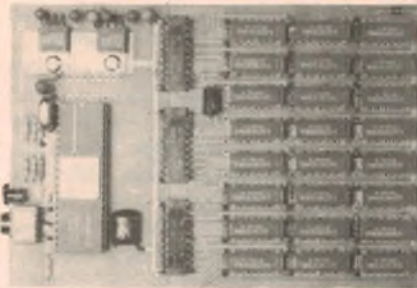

The 821 Controller is programmed at manufacture for the customer's control requirements, and is especially economic for prototype and low volume applications.

Any number of inputs and outputs can be provided up to a maximum of 24. All inputs are opto-isolated and outputs are independent Reed Relay contacts with a 0.5A 10VA rating (Telecom approved relay).

The 821 is housed on a standard 100 by 160mm Eurocard, with all connections made by a .1" edge connector, which may be solder or wirewrap type.

The unit is powered from an external 8 to 12 Volt supply @0.5Amp.

4 I/P, 4 O/P Version \$192 (+S/Tax)

2 I/P, 22 O/P Version \$296 (+S/Tax)

(Typical prices, includes programming but not external connector or P/Supply)

For further information, contact:

**D. R. EBBS & CO,**  
8 Meta St., RYDE 2112, NSW.  
(02) 888 5160.

## Mail — Purchase From Hong Kong

*Personnel Computers*  
*TV Monitors*  
*Printers*  
*Disc Drivers*  
*Computer Accessories*  
*Radio Cassette Recorders*  
*Digital Clock Radios*  
*Car Radio Cassettes*  
*Electronic Components*

If you are looking for excellent quality electronic products manufactured in Far East countries with almost factory price, write to us now for free catalogue.

## COBO INTERNATIONAL ENTERPRISES

P.O. Box 355 Shatin N.T.  
Hong Kong

## Otrona 512: a remarkable portable

Most word processing functions are accessed by single keys on the top row of the keyboard, including insertion and text formatting. Cursor movement and a delete key are also labelled on the keyboard. The more conventional keyboard commands for standard WordStar, a combination of Control and alphabetic keys are also available.

As an indication of the features of WordStar, the instruction manual lists 124 commands and options, divided into groups including file management, cursor controls, text formatting, and basic and advanced editing commands. Such complexity can be overwhelming at first, but the manual written for the Otrona is clear and carefully graduated for the beginner, introducing the most frequently used commands first, and leading, with practice exercises, to full use of the system.

The inclusion of WordStar Plus is an attractive feature of the Otrona 512. For long sessions, however, concentration on the tiny video display quickly becomes tiring. A larger CRT monitor would be a necessity for lengthy use in such applications. On the plus side, WordStar for the Otrona makes good use of the highlight and half-intensity features of the video display.

Also supplied with the Otrona is "Char-ton", a program which allows the user to plot graphs, specifying headings and labels and the number of horizontal subdivisions to be shown. Vertical scaling is automatic, and a choice of bar graphs, line graphs and pie-charts is offered.

Graphs can be superimposed, and displayed with a range of shadings using the Otrona's definable graphics characters to fill blocks. Once displayed on the screen the graph can be printed on an appropriate graphics printer if hard copy is required, or updated to reflect new conditions.

"Valet", supplied with the standard machine, can be accessed at any time from CP/M. This program works in conjunction with the battery-powered clock/calendar to allow the user to set up to six appointment reminders or other alarms. Each alarm consists of a time, date and message. When the Otrona is running the alarm will interrupt the current program at the specified time, automatically saving work in progress, and display the preset alarm or reminder message.

A 14-digit, four function Reverse Polish Notation calculator is also incorporated into Valet for mathematical operations. Valet also contains the printer driver routines for graphics screen dumps, and the setting procedure which allows the user to adjust the brightness of the display screen, volume of the keyboard

sound, bell on/off and the baud rates of the communications and printer ports.

To round off this array of software a communications package and an electronic spreadsheet calculator will also be available. Needless to say, any other CP/M compatible software will also be run on the Otrona 512, providing it is available correctly formatted for the Otrona's double density 14cm disks.

Manuals supplied with the Otrona include specially written versions of the WordStar-Plus and Basic-80 manuals and a copy of "The CP/M Handbook" by Rodney Zaks. We were also provided with a preliminary programmers' guide.

### Who will it appeal to?

Apart from well-heeled free-lance journalists, the Otrona 512 portable would be an attractive proposition for the businessman on the move, executives who want one personal computer for both the home and office and those involved in extensive field-work. The main attraction is the saving in time and money made possible by the computer.

A demonstration cost analysis program used by Otrona dealers, in fact, calculates the "pay back" period of the machine, based on estimates of the time saved in document creation and filing, analysis and business planning and communications. Otrona claim that the computer will pay for itself in under 12 months in common middle-management applications.

Applications which can only be filled by a portable computer include the collections and analysis of data in the field (whether "the field" is a scientific research station or a salesman's territory) and the creation and display of transportable management and marketing presentations. The traveller who brings his own computer to back up his arguments with facts, figures and graphics displays cannot help but make an impression!


At \$4995 for the basic unit, the Otrona 512 is not cheap. This price, however, includes all the software required for a fully functioning business system, disk drives and communications ports. There is nothing else to buy unless hard copy is required, in which case any one of a range of serial printers can be added.

The computer is compact and sufficiently robust to bear the rigours of travel, whether under the seat of a passenger plane or in the boot of a car. As a ready-to-go, hard-working portable computer the Otrona is an attractive proposition. You can even use the computer to work out if the expense was worthwhile!

# FANTASTIC

# A TV GAME WITH INBUILT PERSONAL COMPUTER!

OVER 5000 SOLD!

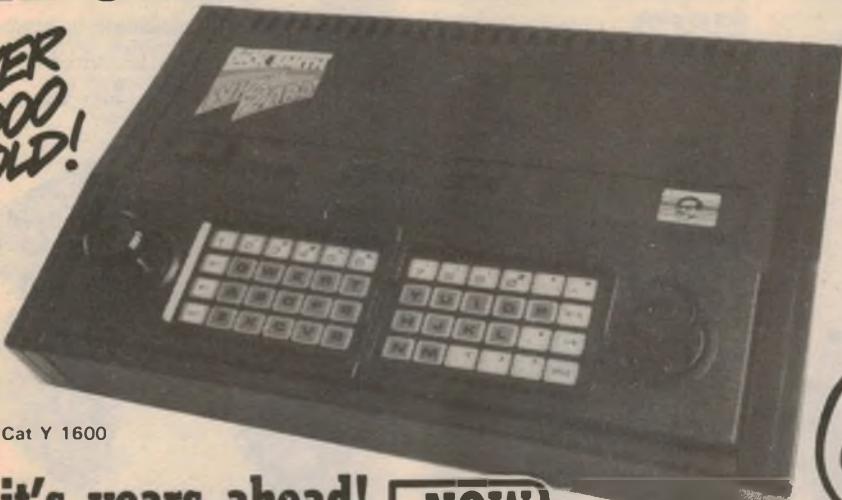

Cat Y 1600



YOU'D BE CRAZY TO BUY JUST A TV GAME!

## & it's years ahead!

Yes — an absolutely up-to-date design. Most of the TV game consoles around were designed at least 2 years ago. And in electronics, that's an eternity!

## Compare the quality

Amazing picture quality with over 49,000 dots — over twice as good as the largest selling TV game. You'll be amazed at the clarity, the detail — just like the screens NASA use in the space shuttle!



## Space age Controllers



GREAT FEATURES — GREAT PRICE!

Not just simple sticks: full space-age guiding devices with 48 keys as well. You get incredible control capability — far more than possible with other games. And slide-in overlays for controllers: you can see exactly what to do! When the controllers are placed in the console, they form a standard typewriter-style 'QWERTY' keyboard — that's versatility!

## Fantastic game Cartridges

21st century games — like you've never played before. And every cartridge has many games — up to 32 in each! You'll never be satisfied with anything less after playing the WIZZARD.

Every cartridge has a built-in demonstration program to show you how to play the game. And plays music, too — it's that advanced!

## NOW AVAILABLE



### Cassette Storage Module

Easy one plug connection to your Wizzard! At last — now you can store your programs and retrieve them without re-keying! Quality cassette unit connects to side of Wizzard, one plug supplies power and signal lines.

AND ONLY \$89.00


Cat Y-1607

## COMING SOON MOVING KEYBOARD

One piece replacement typewriter style keyboard. Cat Y-1608 \$49.50

## Compare the price

The best part of all: the Dick Smith WIZZARD is around \$200 cheaper than the closest comparable computer! Yes, you not only save a fortune by buying the Dick Smith WIZZARD — you get much greater flexibility and enjoyment!



SUPPLIED WITH WIZZARD

## 7 Day Trial Offer

if you're not completely happy, you can return the WIZZARD within 7 days in original condition and packaging for a full refund! You owe nothing — not even an explanation. So why not try the WIZZARD, today!

★★★★★★★★★★★★★★★★

## The one with the inbuilt personal computer

★★★★★★★★★★★★★★★★

The Dick Smith WIZZARD has an inbuilt personal computer facility! Just plug in the optional 'BASIC' cartridge and the WIZZARD becomes a powerful personal computer, complete with 17K of memory (that's more than you get with many personal computers! Learn how to run your own programs. Finance, home-work, anything!



Cat. Y-1605 \$69.50 'BASIC' CARTRIDGE Now Available

## DICK SMITH WIZZARD

\$6.85 weekly over 12 mths to approved customers ONLY \$295

Cat. Y-1600

## Great range of cartridges!

- |                                |        |                    |
|--------------------------------|--------|--------------------|
| Tank Attack                    | Y 1610 | COMING SOON        |
| Dick Smith Championship Tennis | Y 1620 |                    |
| Auto Chase                     | Y 1630 | Music Maker        |
| Crazy Chicky                   | Y 1640 | Soccer             |
| Planet Defender                | Y 1650 | Helicopter Rescue  |
| Air/Sea Attack                 | Y 1660 | Speed Race         |
|                                |        | Deep Sea Adventure |

## FANTASTIC NEW GAMES NOW AVAILABLE

- |               |        |
|---------------|--------|
| Police Jump   | Y 1622 |
| Mouse Puzzle  | Y 1680 |
| Astro Pinball | Y 1685 |

AND \$39.95 EACH ONLY

DSE/A409/JCP

## DICK SMITH Electronics

See page 98 for full address details




\$50,000 IN PRIZES TO BE WON. SEE YOUR NEAREST DICK SMITH STORE.


See these new additions to the C & K family of fine switches and you'll agree they are absolutely brilliant.

DIP, Mini Rocker, Toggle, or Pushbutton, Solid State, 2 Pole Slider, Mini Thumbwheel . . . take your pick or take the lot . . . your product (and customer) never had it so good.


INEXPENSIVE SLIDE DIP SWITCHES — WAVE SOLDERABLE — 2 TO 10 POLE CONFIGURATIONS

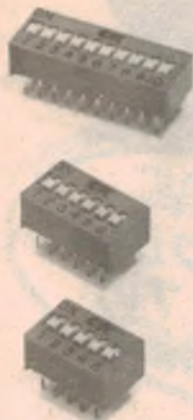

TINY, PANEL OR PC MOUNTING, ROCKER, PUSHBUTTON AND DPDT ON-ON-ON TOGGLE

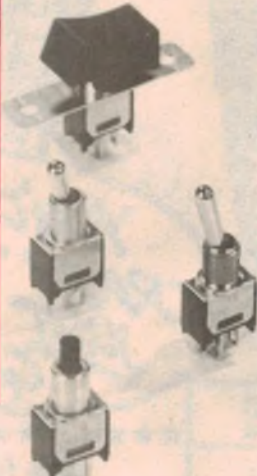

SOLID STATE PUSHBUTTON — LOW PROFILE, PC MOUNTABLE. EXTREME RELIABILITY AND LONG LIFE

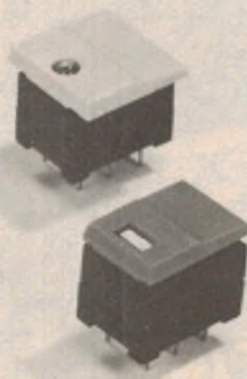

PANEL OR PC MOUNTING DPDT SLIDE SWITCHES — 3 AMP @ 250VAC RESISTIVE LOAD



MINIATURE THUMBWHEEL. VERTICAL OR HORIZONTAL PCB MOUNTING — CLOCKWISE OR COUNTERCLOCKWISE ROTATION



**C & K Electronics (Aust.) Pty Limited**

15 Cowper Street, Parramatta, NSW 2150  
PO Box 229 Parramatta, NSW 2150  
Telephone (02) 635 0799 Telex AA23404

Agents Melb 598 2333/Adel 277 3288/Bris. 36 1277  
Perth 458 7111/Hobart 34 2233/Launceston 31 6533




**BASIC ELECTRONICS** is almost certainly the most widely used manual on electronic fundamentals in Australia. It is used by radio clubs, in secondary schools and colleges, and in WIA youth radio clubs. Begins with the electron, introduces and explains components and circuit concepts, and progresses through radio, audio techniques, servicing, test instruments, etc. If you've always wanted to become involved in electronics, but have been scared off by the mysteries involved, let Basic Electronics explain them to you.

Available from "Electronics Australia", 57 Regent St. Chippendale, NSW. **PRICE 3.50** OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2000. **PRICE \$4.40.**

## 32K BYTES FOR THE ZX81

### SPECIAL RAM PACK FOR THE ZX81

This board uses dynamic RAM chips for lower cost and lower power consumption. Simply plugs into the ZX81 expansion port offering 32K BYTES for basic programmes and data handling. No extra PSU required. Extra memory to help you build your ZX81 into a powerful microprocessor system at an affordable price. Compare the price with other RAM PACKS available on the market!

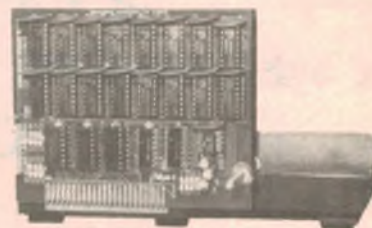

**Price for 32K Ram Pack (RP 32) only: \$165.00 incl. P & P (Aust.)**

**FREE CASES AVAILABLE SOON**



### ZX 80/81 PROGRAMMABLE CHARACTER GENERATOR

Using simple BASIC programs you can create your own unique character sets and graphic symbols for games, High Res graphs and charts and interesting patterns.

Program symbols normally available only on more expensive microprocessors and you are not limited to preprogrammed graphic sets. Fully assembled price \$95.00 incl. P & P (Australia). Uses the 8K ROM from Sinclair (not incl.)

### UPGRADE YOUR ZX80 GRAPHICS

Now you can upgrade your ZX80 to the full animated graphics of the ZX81. Your ZX80 will now run in SLOW mode. Fully assembled price only \$38.50 incl. P & P (Australia). Works only in conjunction with 8K ROM from Sinclair (not incl.)

Please send order or S A E for further information to: **VENDALE PTY. LTD.**, Dept A7, Box 456, Glen Waverley, Victoria 3150, 36 Plymouth St., Glen Waverley, (03) 232 0444.

# VENDALE



## Atari looks for new games to play

"To dream and to take risks" is how Dr Alan Kay describes his job as chief scientist at Atari, the video games and personal computer subsidiary of Warner Communications. In the face of falling profits it will be his dreams that form the basis of Atari's future products — a new world of video games.

Atari was acquired by Warner Communications in 1976. At that time it had a turnover of \$US28 million, after being started in the garage of a young engineer in 1972. By 1980 turnover had jumped to \$US400 million, and last year sales topped \$US2 billion. Atari now accounts for 55% of Warner Communications total business and 70% of the group's total profits, although profits were down in the last quarter of 1982.

Today Atari is divided into three operating divisions; coin operated games, consumer electronics and home computers, and wields a research budget bigger than that of some government groups. The company expects the home video games market to reach saturation point sometime in 1985, with games installed in 60% of US households, and has gathered together some of the most creative minds in computing to chart new directions for growth.

According to Dr Kay, "Humans are communications junkies. They are fascinated by anything that improves

their ability to communicate and are not too worried by the cost." The second theme is the basis of the appeal of all video games, what Kay describes as the "human desire for a simpler, safer more controllable but more exciting world".

Of video games Dr Kay says: "Games, sports, theatrics, music and science — all provide more than escape. They are crucibles for creativity and learning. This is why video games and computers are not just a passing fad but instead appeal to deep human needs."

More than one commentator has pointed out that today's successful video games are based around one or other of the "seven deadly sins". When the games first appeared the appeal was the violent destruction of invaders. Today the appeal seems to be to greed, with games such as "Pacman" based on a tiny animated character that gobbles up everything in sight.

"Pacman" (a trademark of Atari), has "gobbled up" over \$US1 billion — more than the total receipts of the three top

motion pictures in history.

Dr Kay has always been concerned with removing the barriers between people and computers. Before joining Atari he was chief scientist at the Xerox Palo Alto Research Centre, where he designed "Smalltalk", a high level language which treats programs in the computer as objects which can be directly manipulated by the user to form new constructs, even new programming languages.

If Dr Kay's ideas bear fruit the games of tomorrow will require far more interaction between human and machine. Some of the Atari group's long-term research plans are aimed at creating better graphics and games which allow the user to invent stories and participate in the action. The hardware is already available or on the drawing boards, but software is the limiting factor.

The next big step may be artificial intelligence — programs that respond and make decisions based on problems posed by human players. Beyond that Dr Kay is reluctant to make predictions. "Everyone failed to predict the big moneymakers of the 20th century such as the telephone and television. Most people don't know they want something new until they try it" Kay says. "The best way to predict the future is to invent it."

## National Semiconductor introduces 16-bit micro

National Semiconductor Corporation has released an evaluation board for its NS16032 16-bit microprocessor. Each kit includes a CPU, the NS16201 timing control unit and data sheets. Two versions are available, one for 6MHz operation and the other with a 4MHz CPU.

Also new from National Semiconductor is a 4MHz version of its NSC800 CMOS microprocessor. Features of the device include single 5V operation at 21mA and compatibility with the Z80 instruction set.


The chip uses a multiplexed bus structure and provides an on-chip bus controller, clock generator and dynamic RAM refresh capability. Five interrupt request lines are also provided.

Externally the chip is compatible with the Intel 8085 microprocessor, which is often used in controller applications.

National see the NSC800 being used in applications requiring high speed and low power consumption, including hand-held terminals, personal computers and robotics.

On a more mundane level, National Semiconductor has announced a new integrated circuit, the MM5437, which can be used as a digital noise source generator or a pseudo-random number generator. The chip has been designed to produce a broadband white noise signal with uniform noise quality and output amplitude and is intended for use in percussion synthesizers, white and pink noise generators and room acoustics testing and equalisation.

For more information on these new products contact National Semiconductor, Cnr Stud Rd and Mountain Highway, Bayswater, Vic. 3153.

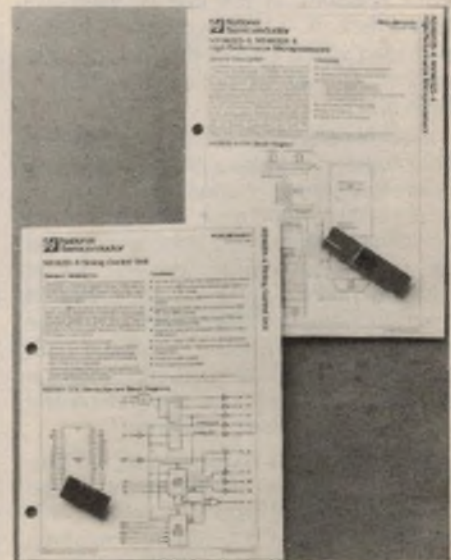

National Semiconductor's NS1600 series chips.

### Standard Microsystems floppy disk controller

Standard Microsystems has just released a new S-100 floppy disk controller board, the FDCS100, able to handle up to four 20cm or 14cm single or double-density, single or double-sided floppy disk drives with any standard S-100 bus computer.

Data separation is performed by a digital phase-locked loop which is said to require no analog adjustment. A 2K EPROM on the board can contain up to four 512 byte bootstrap routines, selected by a switch according to which disk format is in use. A software controlled serial port is also provided on-board for connection of a terminal.

The board can be configured for either polled or interrupt-driven operation, and may be used in either both memory-mapped and I/O mapped systems.

Standard Microsystems' boards are distributed in Australia by Total Electronics, 9 Harker St, Burwood, Vic 3125. Phone (03) 288 4044.

### TRS-80 program speeds up cassette operation

"Hisped", distributed by CISA Microcomputer Pty Ltd, is an enhanced cassette operating system for the TRS-80 Model I computer.

Hisped speeds up tape operation when saving and reading large data files by using only one tape leader and saving all array data in a continuous stream. Both data and programs can be handled, with error checking at the end of each 255 byte block. A "Verify" command is also provided which checks the data on tape against data in memory on a byte-by-byte basis.

In addition to high speed tape routines the program includes a printer driver and print formatting routines which allow other machine language programs to be combined without the problems posed by conflicting printer drivers. Seven cassette speed operations are provided from 500 baud to 2000 baud. The three higher speeds are not compatible with the Tandy XRX tape loading modification, and all operations depend on the quality of the cassette recorder.

Hisped is easy to load and use and provides a significant enhancement of the TRS-80 tape and printer routines. It is available from CISA Microcomputing, 159 Kent St, Sydney, NSW 2000, or phone (02) 241 1813.

### Sanyo MBC 1000 offers "System Solutions"

Sanyo's new MBC 1000 microcomputer is supplied as a self-contained package including a 4MHz Z80 CPU, a 30cm green phosphor monitor and a detachable keyboard with separate numeric keypad, cursor control keys and five programmable function keys. Included in the price is a single 14cm disk drive with a 428k byte capacity (unformatted) and one Centronics parallel and one serial port.

Additional disk capacity can be added in the form of three additional 14cm disk drives or two 20cm drives, and two additional RS232C ports are available as an option.

An additional terminal can be added to the basic system with one disk drive, allowing a limited set of program facilities such as stock enquiries to be accessed while the main computer continues to run a full set of programs. By adding a second floppy disk drive or a hard disk up to three remote terminals can be supported, each able to perform the same functions as the master console.

Multi-tasking is also offered, providing advantages even to users of a single Sanyo system. With multi-tasking, printing of one set of data can be carried out at the same time as another program is running. Up to seven tasks can be handled concurrently in this fashion without appreciable lag in response time.

The MBC 1000 comes with the CP/M operating system, but Sanyo is also offering an advanced range of software known as "Sanyo System



Solutions". Packages in the range so far include a debtors ledger, stock module, purchase orders and creditors modules, a general ledger and payroll accounting as well as a simplified word processor for the production of form letters. All of the modules can be integrated for data transfer and accounting updates.

Also available from Sanyo is the CRX 1000 computer terminal, providing an 80 column by 24 line green phosphor display, typewriter style keyboard, separate number pad and RS232C and 20mA interfaces with switch-selectable baud rates from 75 to 19200bps. A second RS232 interface is provided for attachment of a printer and a Centronics port is optionally available.

Dimensions of the terminal are 410 x 580 x 320mm (W x D x H).

Further information is available from Sanyo Office machines Pty Ltd, 127 Walker St, North Sydney 2060.


### Parallel-to-serial converters from Alfatron

Victorian company Alfatron Pty Ltd has released a line of Centronics-parallel to RS232C serial converters. The AL range is designed to convert a serial input into a parallel output, and is available with either a 256, 1024 or 2048 byte buffer built-in.

Baud rate is switch selectable from 110 to 9600 bps, and handshaking is in the XON/XOFF format. The units are designed to draw power from the Centronics device if possible, but power may be provided from an optional plugpack. Power consumption is 400mA at 5V.

The units come fitted with a "Velcro" strip to allow mounting either inside or outside of existing equipment. All switches are inside the case to prevent inadvertent alteration.

Also from Alfatron is the CS-256 parallel input to serial output converter, said to be especially useful when a printer must be installed at a distance from a system equipped only with a parallel port.

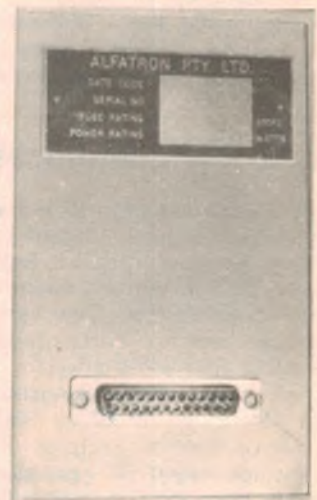

An added feature is that all units can be optionally programmed to allow conversion between different communications protocol.

For further information contact Alfatron Pty Ltd, 1761 Ferntree Gully Road, Ferntree Gully, Vic. 3156. Phone (03) 758 9551.

# Tandon

## HARD DISK DRIVE ADD-ONS

For  
APPLE  
TRS80  
S100  
MULTIBUS  
S.T.D.

*Your Computer*

FOR AROUND  
**\$2,950.00**

inc. tax

For further details  
contact  
MARTIN COLLETT

### AE

**ADAPTIVE  
ELECTRONICS P/L**

418 St. Kilda Road,  
Melbourne, 3004  
(03) 267 6800

O.E.M. Enquiries  
Welcome

## COMP-SOFT INTRODUCES THE MITSUBISHI RANGE OF DISK DRIVES



### M2896-63

- SLIMLINE 8" Disk Drive
- Double Sided, Double Density
- No AC Power Required
- 3ms track to track
- 1.6 mbytes unformatted
- 77 track/side
- 10<sup>9</sup> bit soft error rate

**\$575 + TAX**



### M2894

- Standard size 8" drive
- Double sides, double density
- 3ms track to track access
- 1.6 mbytes unformatted
- 77 track/side
- 10<sup>9</sup> bit soft error rate

**\$525 + TAX**



### M4854

- Slimline 5 1/4" disk drive
- Double sides, double density
- 96 track/inch
- 9621 bits/inch
- 1.6 mbytes unformatted
- 3ms track to track access
- 77 track/side

**\$435 + TAX**



### M4853

- Slimline 5 1/4" disk drive
- Double sides, double density
- 1 mybte unformatted
- 3ms track to track
- 80 track/side
- 5922 bits/inch
- Steel band drive system

**\$395 + TAX**

## COMP-SOFT Microcomputer Services

233-235 Swan St, Richmond, Victoria, 3121.  
Tel: (03) 428 5269

### Multi-user computer has five microprocessors

A new release from the US company Integrated Business Computers is an indication of what the future holds.

The "Ensign" computer system, according to IBC president Randy Rogers, "has been designed to be the fastest, most powerful multi-user microcomputer system in the world". Five microprocessors are used in the computer.



The main CPU is a Motorola 68000 running at 8MHz. Two Motorola 6801 processors handle all serial I/O for up to 32 attached terminals, and a 6MHz Z80B is used to supervise all disk and tape input and output with another Z80B used for memory management. Relieved of overhead for communications, tape and disk operations and memory management, the 68000 is able to bring its full power to bear on computing problems.

Eight megabytes of main memory can be included in the Ensign, with up to 512K bytes allocated to each user. In addition over 1000 megabytes of mass storage can be added, using hard disks or cartridge and nine track reel-to-reel tape. Both OASIS-16 (tm) and Unix (tm) operating systems can be supported.

The Ensign is available from Integrated Business Computers, 21592 Marilla St, Chatsworth, CA 90311.

### AID keyboards from Daneva Australia

Daneva Australia Pty Ltd now has available a new alphanumeric keyboard from Advanced Input Devices, the MK059-001.

Features of the keyboard include low profile (12.5mm), 18mm key spacing and fully sealed switch construction. Overall dimensions are 114 x 273mm, and the switch matrix outputs are said to be compatible with the RCA CDP 1871 CMOS keyboard encoder.

For more information contact Daneva Australia Pty Ltd, PO Box 114, Sandringham, Vic. 3191. Phone (03) 598 5622.

### Computers at work: automated testing

Elmeasco Instruments is now providing what they believe is the only automated PCB testing and programming facility of its kind in Australia. Using the well-known Fluke 3000 Series Automated Board Tester, both digital and analog boards can be handled.

Most testers require painstaking development of test words bit-by-bit. In contrast, the Fluke 3000 Series simplifies programming by providing a large array of signals with various duty cycles and relative frequencies which will exercise all but the most complex circuits.

Up to 232 digital I/O pins and up to eight analog pins can be handled with automatic fault emulation providing close to 100% fault coverage.

While many potential users are put off by the seeming complexity of automated board testing, Bert Kleverlaan, Elmeasco's Marketing Manager, says that automated testing is often viable even when only a very few boards need testing.

"Naturally most people think of automation where large quantities are involved. But it is equally important to think of the complexity of the task. We have had situations where the man-hours involved in individual board tests have almost equalled programming time. Once the program is



developed, the test may take only a matter of minutes by machine. Without automation the customer will expend the same man-hours every time he needs to check a board.

Further information is available from Bert Kleverlaan at Elmeasco Instruments Pty Ltd, 15 McDonald Street, Mortlake, NSW, or telephone (02) 736 2888.

Also from Elmeasco is a new short-form catalog of Datal-Intersil products. The free catalog includes product listings and information on hybrid and monolithic modules such as A/D and D/A converters, sample-and-hold circuits, multiplexers and analog I/O boards, digital panel meters and power supplies.

### Enhanced Monitor for the Exidy Sorcerer

An enhanced version of the monitor program for the Exidy Sorcerer computer is now available from Daniel Wong. Called DWMON 2.1, the new monitor is compatible with the Exidy V1.0 version but includes many new features.

The new monitor includes a video terminal mode which allows the Sorcerer to become a stand-alone terminal using the built-in RS-232C port, and a routine to automatically boot up a disk operating system on switch-on or reset.

The Exidy CREAT, OVER, LIST and BATCH commands have been eliminated to make room for the new features. The existing ENTER command now displays the current memory contents in ASCII as well as hexadecimal, as does the memory DUMP command. The MOVE command has been altered to allow memory contents to be moved up or down between blocks of memory even if they overlap, and new FILL and COMPARE commands have been added.

Blocks of memory can be filled with any character, and the contents of two data blocks compared. A SEARCH command allows any string of hexadecimal

or ASCII characters to be found in memory. The monitor will also accept lowercase commands, and an optional beeper is available which will respond to the ASCII BEL character (07H).

The existing pre-defined graphics characters of the Sorcerer have been removed from the monitor EPROMs and are now stored in the previously empty space of the EPROMs in Exidy's Basic ROM Pak. Apart from allowing more space for the monitor enhancements this means that subsequent clearing of the screen will not re-write the standard graphics characters into the programmable character RAM spaces — a benefit that will be appreciated by many Sorcerer users.

The complete enhancement set consists of three EPROMs, two to replace the existing monitor and one for use in the Basic ROM Pak. The third EPROM can be dispensed with if the pre-defined graphics are not required by the user.

The complete kit of three EPROMs costs \$40. If the Basic graphics ROM is not required the price of the monitor is \$32, with the optional solid-state beeper circuitry available for \$30.

For further information contact Daniel Wong, PO Box 32, Westmead, NSW 2145.



# DON'T PAY \$400!

**DICK SMITH  
INTRODUCES**

**the first direct  
modem to meet  
new Telecom regulations  
& at an incredibly low price!**

- Operates at the standard data rate of 300 baud.
- Designed and manufactured in Australia.
- Standard RS 232C interface — so it can be used with almost any personal computer.
- Fully complies with both Telecom regulations and CCITT recommendation V.21 — hence it is not only legal, but also fully compatible with other modems. (Telecom Authorisation No. C82/37/557).
- Operates in either Answer or Originate mode, at the flick of a switch, for complete flexibility.
- Has a phone/modem switch, for convenient operation.

The data communications revolution has now reached Australia. More and more personal computer users are communicating with other computers via the telephone network, to exchange data and programs with other personal computer users and to access the growing amount of valuable information in the big computer "data bases".

Until now, the only type of telephone modem available for use with personal computers has been the acoustic coupled type. These are expensive, and also depend heavily on the telephone's old-fashioned carbon microphone. As a result, even the best units of this type are often not capable of really reliable, trouble-free operation. But now, after months of development work and negotiation with Telecom Australia, Dick Smith Electronics presents the Dataphone — a telephone modem that really is suitable for personal computers. It's not an acoustic-coupled type, but a true high performance, direct connect model. And it's authorised by Telecom. Even more importantly, it will cost you less than half the price of a comparable acoustic modem!

*Comes complete with approved  
power supply and detailed  
user manual*

**OVER  
1,000  
SOLD!**

**the world's data at  
your command for \$199!**



**IMPORTANT NOTE**

If you build a modem of your own, you'll have to get your assembled modem tested and authorised by telecom before it can be legally connected to a line. The cost is over \$300 — much more than the cost of our complete, tested and already authorised X-3272 modem.

*designed  
and manufactured by*

**DICK SMITH Electronics**

CHECK AVAILABILITY WITH YOUR LOCAL STORE, SEE PAGE 98 FOR FULL ADDRESS DETAILS



Cat.  
X-3272

# THERE WILL BE 31,536,000 SECONDS IN 1983

**KEEP TRACK OF  
THEM WITH THE...**

Handsomely bound, 224 pages thick and measuring a generous 220mm x 145mm, the Omega Discovery Diary is perfect for memoranda, appointments and personal notes. And, as you'd expect, it's packed with the countless facts and stimulating predictions that only Omega gives you.

**ORDER  
NOW!**

ONLY  
**\$8.60**

Postage and  
Packaging  
included

Fill in this coupon and send it to:  
Omega Discovery Diary Offer,  
Magazine Promotions, PO Box 131,  
Chippendale, NSW 2008. Cheques  
should be crossed and made payable to  
Magazine Promotions.

OMEGA DISCOVERY DIARY  
Omega Diaries @ \$8.60 each.

Please send me .....

Total amount enclosed \$ .....

NAME .....

ADDRESS .....

POSTCODE .....



## Facit daisywheel printers from EAI

Facit has announced the release of a compact daisywheel printer, the Facit 4565. The new "letter quality" printer will produce both fixed and proportionally spaced text at up to 40 characters per second and is said to be compatible with machines such as the Qume and Diablo daisywheels.

Features include a choice of printing modes, with either character by character or line by line bidirectional printing or direct addressing of the print-wheel and carriage by the host computer. Attributes such as underlining bold text and graphics are also available.

Facit printers are distributed in Australia by EAI-Electronic Associates Pty Ltd, PO Box 170, Crows Nest, NSW 2065. Phone (02) 439 7522 or, in Melbourne (03) 699 7100.

## News from the clubs

● The University Computer Club of the University of Western Australia has been established since 1974. The club has its own Alpha 16 microcomputer, with extensive software developed by club members. A recent new purchase is a 16-bit computer board using the National Semiconductor 16032 CPU. Contact the club on (09) 386 1455.

● A Microbee users' group has been formed in Darwin under the name DBUG. The club can be contacted by writing to GPO Box 3111, Darwin, NT 5794, or phoning Felino Molina on 88 1455 (AH).

● The Zebra-Xray 80 newsletter and the Australasian ZX Users Newsletter have merged forces under the second name. Price of a year's subscription is \$15, with single issues at \$2 each. For further information contact the Australasian ZX Users Newsletter, PO Box 397, Dapto, NSW 2530.

● The Melbourne Super-80 Users Group has sent us a copy of their monthly newsletter, containing a "lunar shuttle" game and details of Super-80 keyboard routines as well as comments on new peripheral devices. The group has an extensive membership and meets on the second Friday of the month at the Heathmont Uniting Church, Canterbury Road, Melbourne, at 8pm. Annual subscription to the newsletter is \$12.

For more information contact Victor Shuttleworth, 17 Stephen Crescent, Croydon, Vic 3136.

# 50 & 25 YEARS AGO

"Electronics Australia" is one of the longest running technical publications in the world. We started as "Wireless Weekly" in August 1922 and became "Radio and Hobbies in Australia" in April 1939. The title was changed to "Radio, Television and Hobbies" in February 1955 and finally, to "Electronics Australia" in April 1965. Below we feature some items from past issues.



February 1933

**Repeat Programs:** Dear Sir, — May I crave a small space to protest most strongly against the Commission's practice of repeat programs. It is bad enough to have gone to the expense of a 5-valve set and get national relays, not forgetting the 24/- per year for the privilege of hearing these repeats. I find it is only necessary to buy one "Wireless Weekly" per fortnight, as one week's program on national stations serves its purpose the following!

Yours, etc,  
A. WESTON

Ca. posie (2/2/33).

☆ ☆ ☆

**Thought Waves:** At the meeting of Harringtons' Radio Club on January 27 some unique experiments were carried out. The occasion was a lecture and demonstration on the transmission of "Thought Waves". The lecture, delivered by the president of the club, based on notes from Mr A. Bird, G6AQ, London, dealt with the phenomenon referred to as the "aura" which it is asserted all human beings possess.

☆ ☆ ☆

**Luck Charms:** Back in the old days the ancients said that those who had faith were truly blessed and received what they believed in. They themselves had faith in all sorts of things — charms to bring luck, charms to bring health, charms to bring happiness, charms to bring wealth. They combined all four in the Swastika — and right through the years, the Swastika has been accepted as a luck token of extraordinary power. It brings to those who wear it and believe in it good luck. Here's an opportunity for readers to get a lucky "Health, Wealth and Happiness" Swastika in gleaming gold.

(From an advertisement)



February 1958

**Stereo Discs:** Stereophonic disc recording is a prospect for the immediate future. Not so long ago, during the Audio Engineering Society's convention in New York City, two systems of stereophonic disc recording — both using a single groove and single stylus — were demonstrated. Comments of manufacturers and engineers left little doubt that commercially practical disk stereo has arrived, and it is confidently expected that major record manufacturers on both sides of the Atlantic will start producing stereo discs this year.

☆ ☆ ☆

**Lab Suits:** According to a recent report in "Electronics" (Business Edition), space suits are being used to allow engineers to work inside a vacuum chamber pumped down to a sufficient order to allow valves to operate normally without envelopes. This is happening in the Lab at Litton Industries. Electrodes of the valve can be moved while the tube is in operation to find optimum positions for the desired results. Chief use to date is for work on the Chromatron colour TV tube.

☆ ☆ ☆

**Red Hot Valves:** The penetration of the "thermal barrier" in the production and use of electronic tubes appears to be in sight. An American company recently announced the development of valves, resistors, capacitors, transformers, printed circuit boards and other devices capable of operating at temperatures up to 1500 degrees Fahrenheit.

The new devices are made of ceramics and metal such as titanium that have high melting points. With the apparatus operating at such high temperatures, one series of valves does not need a power supply to heat its filaments.

# From P.C. Mounting Transformers to Line Conditioners FERGUSON MEETS YOUR MICROPROCESSOR NEEDS


## P.C. MOUNTING

The PL161/5VA is ideal for on-board microprocessor use. Provides 200mA at 8V and 150mA at 12-0-12V. Suits standard 0.1" grid.



## LOW PROFILE

The popular Ferguson range includes 3 types for microprocessor use rated at 15, 40 and 60VA. Provided with triple secondaries -  
PL158/15VA dual 14V at 400mA and 9V at 500mA  
PL30-9/40VA dual 15V at 500mA and 9V at 3A  
PL30-9/60VA dual 15V at 500mA and 9V at 5A



## CONVENTIONAL

For larger system use -  
PF4405 provides dual 15V at 1A and 9V at 10A  
PF4354 provides dual 15V at 1A and dual 9V at 10A



## CONSTANT VOLTAGE

Ideal for building in to equipment the ACV137/A172 provides 8V at 25A and 16V at 5A with 1% output variation for a 15% change in the input. One of a range of ferroresonant transformers rated from 150VA to 7.5kVA (single phase) providing constant voltages.



# FERGUSON

## FERGUSON TRANSFORMERS PTY LTD

331 High Street, Chatswood N.S.W. 2067. Tel: (02) 407 0261 Telex: AA25728  
Branch Office: 181-183 Hawke Street, West Melbourne Vic. 3003  
Tel: (03) 328 2843 Telex: AA33510

# Choose ROYEL for high reliability soldering and desoldering.

*Sensitive components are easily damaged by uncontrolled soldering tip temperatures and electrical spikes. Royel soldering tools are helping to solve these problems, world wide.*



## Fully automatic!

NO TRANSFORMER TO BUY!  
ONE TIP - ALL TEMPERATURES!

\*Also available:

The cost-effective DUOTEMP. Normal temperature to protect components. Boost button for rapid heat-up and heavy-duty soldering.

## MAINS VOLTAGE THERMATIC

Slim. Lightweight. High power. 60 second heat up. Fully electronic AUTOMATIC feedback temperature control. In-handle temperature selector. For micro-miniature, medium and heavy duty soldering.

CHOICE OF 3 MODELS WITH TIP DIAMETERS OF 3, 5 OR 6.5 mm. EACH IN 6 PROFILES x 6 SIZES.

BUY FROM YOUR ELECTRONIC PARTS SUPPLIER.

# ROYEL

Royston Electronics

N.S.W. (02) 709 5293 QLD. (07) 277 4311  
VIC. (03) 543 5122 S.A. (08) 42 6655  
TAS. (002) 34 2233 W.A. (09) 381 5500

T182/A



# INFORMATION CENTRE

**CASSETTE RECORDER:** Recently I was listening to a friend's portable stereo cassette recorder. I think it was a Philip's, for which she paid about \$100. The unit has a three position switch: mono-stereo-spatial. The effect produced by the spatial is like listening to (hard to explain) greater music, fuller, like in a concert hall. By the way it's not "loudness". Somebody said it is a type of echo effect.

I was very impressed with the sound and the reason for writing to you is to find out if you have a similar project or if you would consider this one for a later project. I am sure a lot of hobbyists would appreciate it. (B. I., Launceston, Tas).

● Circuits to enhance stereo separation generally do so by subtracting some of the opposite channel signal from the main signal in each channel and thereby increase the difference between the two. This can be done fairly simply with a couple of op amps and a suitable crossfeed circuit.

A superior way of enhancing stereo is to use bucket brigade devices to increase the interaural delay, ie, the perceived time differences.

Our stereo synthesiser described in September of this year can also be used to enhance normal stereo reproduction. Apart from this we have not published any circuits along these lines. We will consider this for the future.

**SUPER-80 KIT:** I have recently constructed the Super-80 kit, and have come across a few unusual problems. The only problem encountered during construction was getting the LED and relay to pass the test. I got over this after numerous tests checking the waveforms and pulses in the LATCH circuitry but to no avail. Finally, as a last resort, I inserted the remaining chips. It worked when I put the power back on. From then on the computer looked as if there were no other problems.

I ran some short programs and they worked perfectly. However, when I tried loading programs that have been saved before, occasionally some letters or characters in the display change. Worse still, it lost the entire program after running it. Note, it only happens occasionally. It happens most frequently when, after a typing or programming session, I switch the set off and about 15 minutes later I load back the program. The listing

initially looks alright, but a few seconds later, some characters change causing a previously working program to develop typing errors.

Another problem is that sometimes it doesn't change a line instruction even though I have already typed in a new one at the same line number. Once, it kept recognising line 70 instead of line 170, making editing impossible.

The computer sometimes gets locked in a state where only a hardware reset gets the flashing cursor back on the screen; the program in memory is lost of course. I am using Basic in EPROM.

Initially, I suspected the RAMS but after swapping them around, the problem persisted. There is no problem relating to the cassette interface, as it loads alright since the program listed after a load is correct, only that the bits in the program change sometimes. The bit changes are at particular lines only. Occasionally when I notice a bit change, I list the program and that particular bit reverts back to what it was. After some time it changes again.

I suspect that the refreshing circuitry is not working properly. Please advise and if possible pinpoint the fault. Also, could you please tell me which RAM chip is the first 2K? (S. L., Mulgrave, Vic).

● We will answer your last point first in order to clear up a misconception. No one RAM chip is the "first 2K". Dynamic RAM chips are organised as 16K x 1 bit, which means that the first chip holds all the least significant bits for the whole 16K.

The second chip holds all of the next least significant bit for the entire 16K of data, and so on. Memory errors can be localised by observing which bit in each data byte is affected. In Row 0 (the first 16K bank of memory), U53 holds all the 0 bits, U56 all the 1 bits and U59 all the bit 2's.

Memory errors are generally caused by power supply fluctuations. There are two sources of the problem. When dynamic memory devices are written to they draw a large supply current momentarily, which must be supplied by the reservoir capacitors adjacent to the memory chips. This problem was solved in the prototype by installing additional capacitors on the memory chip power supply lines, as close to the affected chip as possible.

Pay particular attention to the -5V supply rail, including the bypass capacitors on each side of the -5V regulator, which may need to be increased in value.

A second source of memory errors can be power line interference, particularly if the errors seem to be associated with switching another device on or off. Many Super-80 owners have fitted their computers with a mains-interference filter, which appears to help solve problems of this type.

A technical bulletin, No. 53, from Dick Smith Electronics describes another problem: the appearance of rows of "@" symbols on the video display. The problem is caused by the arbitrary interruption of memory access cycles at the transition of the BUSAK signal which initiates the scanning of video memory.

The technical bulletin describes the installation of an extra flipflop to synchronise the leading edge of the BUSAK signal with the MREQ2 signal derived from the video circuitry. The technical bulletin is available on request from Dick Smith Electronics.

**FLUORESCENT STARTER:** Instead of building your electronic starter for fluorescent lamps (EA, October 1982) I tried a 1 $\mu$ F capacitor and found that it seemed to give the same results as your circuit I wondered what you thought. (J.C., Bombala, NSW).


● Many fluorescent tubes will start without starters, particularly 20W types. Since your connection energises the heaters, it is not surprising that it works. However, it is highly unlikely that it would work in most cases.

**240V INVERTER:** After building the 12-230V inverter in the June 1982 issue, I found another error which was not noted in the following months. The mains colour coding showed the two white wires being 230V which was found to be incorrect. After connecting the wiring as shown on the diagrams the following components were destroyed: TIP3055, 390 $\Omega$  resistor, 6.8 $\mu$ F capacitor, red LED and LM324. I am just wondering if anybody else has had this problem with their inverter as this is a very expensive project. I think all problems of this nature should be found before these projects are published. I am enclosing the repair bill for the inverter which I had

# TRY A LITTLE SUNSHINE: TRY SOLAR CELLS!

These highly efficient silicon semiconductors convert light directly into electricity. You can use them to build a solar powered fountain (see Electronics Australia November 1982). Or use them to recharge NiCad batteries. Or power transistor radios, clocks, toys, remote sensors, remote data loggers, trickle charge batteries, alarms etc.

The use of solar cells range from novelties to serious applications and is limited only by your imagination!

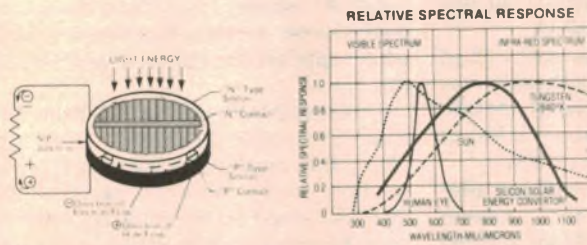

## THESE ARE PRIME-SPEC, FIRST GRADE SOLAR CELLS

- Type 1:** Convert your LCD calculator to solar power for the price of 1 set of batteries, 3V 45uA 47 x 27mm ..... each \$5
- Type 2:** 20 x 10mm 0.45V 45mA pack of 5 ..... \$10
- Type 3:** 30° segment of 75mm dia 0.45V 78mA pack of 12 ..... \$15
- Type 4:** 60° segment of 60mm dia 0.45V 95mA pack of 6 ..... \$12
- Type 5:** 60° segment of 75mm dia 0.45V 155mA pack of 6 ..... \$15
- Type 6:** Quarter of 75mm dia 0.45V 280mA pack of 4 ..... \$15
- Type 7:** Quarter of 100mm dia 0.45V 475mA pack of 4 ..... \$18
- Type 8:** Half of 75mm dia 0.45V 560mA pack of 4 ..... \$22
- Type 9:** Half of 100mm dia 0.45V 1A pack of 2 ..... \$19
- Type 10:** 75mm Round cells 0.45V 1.1A pack of 2 ..... \$20
- Type 11:** 100mm Round cells 0.45V 2 A pack of 2 ..... \$30

Please add \$3 for Certified Post and Packing.

**AMTEX**  
ELECTRONICS



11 Spring Street, PO Box 285 — CHATSWOOD 2067  
Telephone (02) 411 1323

To: Amtex Electronics, PO Box 285, Chatswood NSW 2067

Please send me ..... \$  
Certified post & packing ..... \$3.00  
Cheque enclosed ..... \$


Name .....  
Address .....

# L.E. CHAPMAN

122 PITT ROAD, NTH CURL CURL.  
MAIL ORDERS: BOX 156, DEE WHY, NSW. 2099.  
TELEPHONE 93-1848.

## SUPER SPECIAL

GRAMOPHONE motor and pickup 3 speed stereo balanced arm.  
240 volt \$9.75  
PP NSW \$1.50  
Interstate \$2.75  
WA \$4



## SUPER SPECIAL FM STEREO KITS



Sets of 3 modules includes FM tuner decoder and if detector. Circuit diagram supplied

**ONLY \$22 PP \$1.40**

Send stamped envelope for copy of Electronics Australia magazine review of the units.

<b>ELECTROS</b>	470µF 16V 5 for \$1	1000µF 63V \$1 each
220µF 16V 10 for \$1	47µF 16V 5 for \$1	47µF 200V 3 for \$1
1000µF 16V 5 for \$1	22µF 16V 5 for \$1	1000µF 25V 5 for \$1
2.5µF 350V 5 for \$1	2500µF 16V 5 for \$1	680µF 35V 2 for \$1
470µF 40V 5 for \$1	16µF 350V 4 for \$1	<b>CAPACITORS</b>
220µF 50V 4 for \$1	47µF 160V 5 for \$1	0.47MFD 100V 10 for \$1
470µF 35V 4 for \$1	330µF 63V 5 for \$1	220µF 63V 5 for \$1
220µF 50V 4 for \$1	22µF 160V 5 for \$1	0.0068µF 1500V 3 for \$1
1000µF 10V 5 for \$1	25µF 63V 3 for \$1	0.0039µF 1500V 3 for \$1
220µF 10V 10 for \$1	470µF 63V 3 for \$1	0.068µF 400V 5 for \$1
47µF 25V 5 for \$1	47µF 25V 5 for \$1	0.015µF 250V 10 for \$1
47µF 50V 5 for \$1	330MFD 16V 2 for \$1	680K 250V 5 for \$1
470µF 25V 5 for \$1	2000MFD 25V 2 for \$1	47K 630V 5 for \$1
220µF 63V 4 for \$1	1000µF 50V \$1 each	2.2 200V 5 for \$1

## BSR DELUX RECORD PLAYER

11 INCH TURNTABLE CUEING DEVICE  
SHIELDED MOTOR MAGNETIC CARTRIDGE  
\$50. BASE & PERSPEX TOP \$22 EXTRA  
P&P NSW — \$4.50; INT — \$5.50  
WA — \$6.50  
NT — \$6.50



SPEAKERS 2 1/2 INCH 2 FOR \$1

## MAGNAVOX SPEAKERS

8 INCH DUAL CONE 16 OHM 10 WATT  
\$6  
PP NSW \$1.80  
INTERSTATE \$2.75  
WA, TAS, NT \$4



## DUAL VU METER \$3



Touch micro switches ..... 4 for \$1  
100 mixed capacitors fresh stock handy values ..... \$2  
Crystals for a colour TV ..... \$1.50  
100 mixed resistors handy values ..... \$2  
200 mixed screws, bolts, nuts, self tappers, etc ..... \$1  
Tuning Capacitors, 3-gang ..... \$1

## SLIDE POTS

1/2 meg dual ..... 50 cents  
1 meg dual ..... 50 cents  
2 meg dual ..... 50 cents  
25K dual ..... 50 cents  
250K dual ..... 50 cents  
1K dual ..... 50 cents  
50K single ..... 30 cents  
250K single ..... 30 cents  
10K single ..... 30 cents

## VU & BALANCE METERS

12K $\Omega$  100uA \$2.00 STEREO VU \$3.00

**SPEAKER SYSTEMS**  
**\$29.50 PAIR**  
Two 6" Dual Cone Magnavox Speakers in each cabinet 10 watts RMS  
P&P NSW \$4.50 INT \$5.50 WA \$6.50  
— NT \$6.50

**POTS ROTARY**

- 1/2 Meg ..... 30c
- 1 Meg ..... 30c
- 100K ..... 30c
- 100K Switch ..... 50c
- 50K Double Pole Switch ..... 50c
- 7.500 ..... 30c
- 10K Switch ..... 50c
- 250K ..... 30c
- 50K ..... 30c
- 20K ..... 30c
- 10K Min Pots ..... 25c
- 50/ohm ..... 50c
- 1/2 or 1 Meg Switch ..... 50c
- 1/2 1 meg dual Concentric tapped at 100K \$1
- 2 meg ganged double pole switch ..... \$1
- 1.5 meg dual ganged ..... 50c
- 2 meg dual ganged ..... \$1
- 1 meg dual ganged ..... \$1
- 1/2 meg dual ganged LIN ..... 75c
- 25K 50K dual ganged Concentric double switch ..... \$1
- 200K single line ..... 30c
- 20K wire wound ..... 75c
- Jual log 10K ..... 75c
- 100K dual ganged linear pots ..... 75c
- 10K sub min log pots ..... 50c
- 250K ganged pots ..... 75c
- 25K lin ganged pots ..... 75c

**SPECIAL MAGNAVOX SPEAKERS**  
**\$20 PAIR**  
10 INCH WOOFER  
10 INCH MID-RANGE  
8 OHM SYSTEM, 20 WATTS RMS



P&P NSW \$3.50 — INT \$4.50 — WA \$5.50  
NT \$6.50

**SPECIAL**  
SPEAKER CROSSOVER NETWORKS 2WAY  
FREQ 4KHZ 30W 80HM



to pay because of your magazine's faulty wiring diagram (B. T., Wangaratta, Vic.)

● Before publishing the circuit of this inverter, we contacted the manufacturers of the transformer concerned to confirm that the white wires were, in fact, to be only used as the 230V windings. The blue wires are used for the low voltage 12V winding. This was verified and we feel justified in having indicated that the white wires are the 230V winding. We regret that you have experienced this problem but it appears that you have been supplied with a transformer with incorrectly coded leads. We have not had any other complaints along these lines.

**DIGITAL READOUT:** I read the article "Digital Readout for Shortwave Receivers" (EA Oct '82) with great interest. However there must be many people who own an FRG7 receiver for which the above is not suitable, as mentioned in the article, but would like digital readouts.

Most circuits I have seen only show the decimal parts of the MHz but I have thought of a way that would show the MHz reading also. The basic design is that shown in "Radio Tuner Frequency Counter" by J.L. Linsley-Hood in *Wireless World*, October 1980 – which by the way is very similar in concept to your own design.

As you know the first VFO in the FRG7

## Electronics Australia Reader Service

"Electronics Australia" provides the following services:

**PHOTOSTAT COPIES:** \$3 per project, or \$6 where a project spreads over multiple issues (price includes postage). Requests can be handled more speedily if projects are positively identified, and if not accompanied by technical queries. We reserve the right to supply complete back issues instead of photostats, where these are available.

**CHASSIS DIAGRAMS:** For the few projects which require a custom metal chassis (as distinct from standard cases) dyeline plans showing dimensions are normally available. \$3 including postage.

**PC BOARD PATTERNS:** High contrast, actual size transparencies: \$3, including postage. Please specify positive or negative.

**PROJECT QUERIES:** Members of our technical staff are not normally available to discuss individual projects, either in person at our office, or by telephone.

**REPLIES BY POST:** Limited to advice concerning projects published within the last three years.

Charge \$3. We cannot provide lengthy answers, undertake special research, or discuss design changes. Nor can we provide any information on commercial equipment.

**OTHER QUERIES:** Technical queries outside the scope of "Replies by Post" or submitted without fee may be answered in the "Information Centre" pages, at the discretion of the Editor.

**COMPONENTS:** We do not sell electronic components. Prices and specifications should be sought from advertisers or agents.

**BACK ISSUES:** Available only until our stocks are exhausted. Within six months of publication, face value plus 90c for post and packing for each issue. Seven months and older, \$3 (includes post and packing and storage fee).

**REMITTANCES:** Must be negotiable in Australia and made payable to "Electronics Australia". Where the exact charge may be in doubt, we recommend submitting an open cheque endorsed with a suitable limitation.

**ADDRESS:** All requests to the Assistant Editor, "Electronics Australia", Box 163, Chippendale, 2008.

tunes 55.5MHz to 84.5MHz in 1MHz steps. If this signal was amplified by a FET and passed through a divide-by-100 stage and then a further divide-by-100 stage the signal would be 5550 to 8450 cycles in 100-cycle steps.

This is then fed into two stages of a 74C192 counter set in the count-up mode and preloaded with 4 & 5; the readings would then move from 00 through 29 which is required (the 1 overflowing).

For myself and other owners of an FRG7 I hope the above is "food for thought" and that you may publish, in the not too distant future, a design for the FRG7. (E.P., Black Rock, Vic.)

● Your letter certainly is food for thought. Another of our readers has drawn our attention to a "Circuit & Design Idea" item published in our April 1970 issue. This suggests a way of interfacing Wadley loop receivers, such as our Deltahet, by using a mixer for the tuner VFO and a suitable crystal oscillator. This enables the actual tuned frequency to be accurately determined.

**TRANSFORMER 1:** I was recently reading one of your magazines, a fairly old one, belonging to one of the teachers at our school. In it I particularly noticed an article on a car called Transformer 1, (Pages 28-29, April 1977) and, being interested in electric cars, I wondered if there is anywhere that I could get further information on the car. (A.M., Goodiwindi, Qld.)

● We have no further information on this car but it is briefly described in "The Complete Book of Electric Vehicles" which is currently available from Dick Smith Electronics stores.

## The Serviceman

supposed to. Looking at the circuit again I could see only one other possibility; a line from the collector via a 1Ω resistor (R459) to a plug marked "DD" and pointing to another plug marked "LC".

Plug "LC" turned out to be on the chroma/decoder board and, more specifically, the line I was tracing went to the base of transistor Q204, the vertical retrace blanking stage. This is driven from the collector of the vertical switch (BC327), via the line I had just traced, and is wired as an emitter follower. Output from its emitter is coupled to the base of the third video amplifier, so as to cut it off during the retrace period.

At least, that was what was supposed to happen. I suddenly realised that I had chosen to ignore what could have been a vital clue. When the picture was in its collapsed condition it was somewhat brighter than normal and was also showing some evidence of retrace lines; something which I had tended to brush aside as a by-product of the reduced scan.

It took only a few moments to check the voltages along this run, from the collector of the BC327 up to the base of Q204. From about 10V at the collector it rose by about 0.5V on the other side of

## cont'd from p76

R459 and this same voltage appeared at the base of Q204 which, according to the circuit, should have had only 0.15V on it.

This transistor, with 20V on its collector, was now the prime suspect. I reached for the soldering iron, pulled the transistor out and, without waiting to test it, switched the set on again. And that was it. The picture came up to full scan, overscan in fact, and once I readjusted the height, was virtually perfect except for retrace lines.

I fitted a new transistor, a 2SC711 (no shortage of these), and that effectively wiped the retrace lines. Then I hooked up the old transistor to the tester and found, as I fully expected, that it was very, very leaky. The only other point being that, whatever the nature of the transistor fault, it was not consistent.

And so the set was duly returned to the customer, who was quite happy with the result – or as happy as anyone is when they have to pay out for a service job. The truth is that this set had suffered two transistor failures in 12 months; so much for the reliability of solid state devices, something about which I, and a lot of my colleagues, are becoming extremely sceptical.

## Notes & Errata

**ULTRASONIC RULE** (August 1982, File 3/MS/94): The PCB artwork on page 82 of the article has a track missing between the cathode of the 3.9V zener diode and the adjacent 33kΩ resistor. This is correctly shown on the overlay diagram on page 79.

**FLUORESCENT STARTER** (October 1982, File 2/PC/33: The errata on page 133 of the January issue suggests reducing the .015μF capacitor to 0.1μF if tubes prove difficult to start. This should have read .01μF.

# MARKETPLACE

## FOR SALE

**CP/M USERS GROUP.** Discs \$10 per volume. CPMUG catalog \$10. 64K S100 CMOS static RAM cards \$425. 8" disc drives new \$450. Discettes 8" \$65, 5" \$53 library box of 10. CAE Electronics, PO Box 62, 1/27 Forge St, Blacktown 621 4242.

**NEW QUALITY NICAD BATTERIES.** Cheap. AA; sub C; C and D size to 4 amp. Fast charge. Suit most gear incl flashguns, toys and Big Jim torches, etc. Last for years. Info 557 Merrylands Rd, Merrylands 2160. (02) 636 1592 any time.

**ZX81 64K RAM PACK.** Do some real computing. Yes, with warranty, cost new \$350. Asking \$200 (02) 477 5566.

**VDUs** (shop sales only). ICL 7181 14" green trace 25 x 80 col units \$250. Olivetti VCT 450 intelligent communication terminal 24 x 80 col. Brand new \$550. ICs UART 8251 \$3.50, Z80 PIO \$3.75. Z80CTC \$3 or set of 1 ea \$8.75. Add \$1 p & p with order. R. Urech, 95 Regent St, Chippendale 2008. (02) 698 8079.

**SUPER 80 SOFTWARE:** For free list send SAE to: Megasoft, 151 Denton Ave, St Albans 3021. Ph (03) 367 1469.

**VDU CARDS:** Stand alone. 64 \* 16 (SCVT-100) \$170 ono; 80 \* 24 (Video Plus II, 6502 based) \$299 ono. Ring between 6.15 and 9.30pm (051) 22 1157.

## FOR HIRE

**MICROCOMPUTERS FOR WEEKLY RENTAL** ... \$25 per week. Commodore PET systems, with manuals and software tapes. Cassettes include games and self-teaching tutorials in BASIC and 6502 machine language. David Bates & Associates. Ph (02) 630 8652.

## READER SERVICE

**REPAIRS** to multimeters, CROs, meggers and all test instruments. Western meter and instrument service. 31 Hazel St, Girraween 2145. (02) 631 2092.

**COMPUTER REPAIRS** — WA Eproms programmed. Custom interfacing and hardware mods. J. & T. Computer Services; WA (09) 401 2733.

**REPAIRS** to all home, hobby and small business microcomputer systems and peripherals, also all EA & ETI projects. CAE Electronics, 1/27 Forge St, Blacktown 2148. (02) 621 4242.

**DISPLAY ADVERTS IN MARKETPLACE** are available in sizes from a minimum of 2cm x 1 col rated at \$15 for a col cm.

**CLASSIFIED RATES** \$3.60 for 40 letters or part thereof an insertion payable in advance. Minimum 80 letters.

**CLOSING DATE** is six weeks prior to the on-sale date. Issues are on sale the first Wednesday of each month.

## RCS Radio Pty Ltd

Tel. (02) 587 3491

IS THE ONLY COMPANY  
WHICH MANUFACTURES AND  
SELLS EVERY PCB & FRONT PANEL  
published in EA and ETI  
651 Forest Road Bexley 2207  
AUSTRALIA

RING FOR INSTANT PRICES  
24 HOUR TURNAROUND SERVICE

Sales of CMOS, TTL, LINEAR, DIGITAL ICs, etc, Transistors, LED, Zeners/Diodes, Resistors, Capacitors, etc, Coax, Audio and Hook-up Cable. CB Accessories, CB's, Antennas.

(Send for free catalogue)

SALES 7 DAYS A WEEK — FAST MAIL  
ORDERS

BANKCARD WELCOME

Ross Erwin Electronics,

Tel (02) 636 3739

(PO Box 295, Parramatta 2150)

Don't miss the next bumper issue of

# VideoMag

## Features

- Black & White Films in Living Colour
- How Video Enhancers Work
- A Big Future for Pay TV

## Reviews

- National NV-100 Portable
- Sharp VHS-C Compact System
- Showtime VV-270P Image Enhancer

## Cassette Releases

- The Sword and the Sorcerer
- Far East

**ON SALE: Monday February 14**



**BASIC ELECTRONICS** is almost certainly the most widely used manual on electronic fundamentals in Australia. It is used by radio clubs, in secondary schools and colleges, and in WIA youth radio clubs. Begins with the electron, introduces and explains components and circuit concepts, and progresses through radio, audio techniques, servicing, test instruments, etc. If you've always wanted to become involved in electronics, but have been scared off by the mysteries involved, let Basic Electronics explain them to you.

Available from "Electronics Australia", 57 Regent St, Chippendale, NSW. **PRICE 3.50** OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2000. **PRICE \$4.40.**



## ELECTRONICS CENTRE

BARGAIN PRICES • PERSONAL ATTENTION • SLICK MAIL ORDER SERVICE • SATISFACTION

### CABINETS PROFESSIONAL QUALITY

**\$22.95**



P-P. NSW. \$4.50.  
V. SA. Q. T. \$5.50.  
WA. NT. \$6.50

BRAND NEW PERFECTS. 101 APPLICATIONS

Direct from a manufacturer of sophisticated electronics • Fully moulded, hi-impact, heavy duty ABS plastic • The colour is battle-ship grey • Detachable U-shape top and bottom, front and back panels • Front panel has cut-outs, and will easily accept a blank panel • 4 jumbo countersunk plastic screws secure the 4 sections • Underside has ample ventilation, and dimples for rubber feet • Dimensions 350mm (W) X 130mm (H) X 350mm (D) material 5mm thick.

• 240VAC 50Hz TO 115VAC 500VA. STEP-DOWN TRANSFORMERS • Approved — Double Wound — Fuse Protected — 3 Types.

OPEN TYPE

END COVERS

FULLY ENCLOSED




**\$19.95**

P-P. NSW. \$7.50



**\$23.95**

V. SA. Q. T. \$11.50



**\$29.95**

WA. NT. \$15.50

### RECHARGEABLE LEAD-CALCIUM BATTERIES

SONNENSCHN

Fully sealed Maintenance free. ABS plastic case. 150mm (W) X 90mm (H) X 65mm (D). LIMITED STOCKS.

12 VOLT  
5.7AH



**\$22.95**

P-P. NSW. \$2.50  
INTERSTATE \$4.50

### HMV 4CH REMOTE CONTROL



JOY STICK

**\$9.95**

Brand new units ready to go — OR ideal to adapt to — TV — computer games, radio control. Joy stick has full 360 degree rotation. Panel is marked — front, rear, right, left. Pot values are 50KA tandem. All in high quality aluminium case.

### SUB MINIATURE ROTARY SWITCH DAVEN U.S.A.



1 pole 15 positions 3 bank. Gold plated contacts. Fully sealed dust proof. O.A. dia. 20mm. Body dia. 16mm. Body length 32mm. Shaft 10 X 3mm dia. P-P 90c **\$3.50**

IN 4004. 50 FOR \$7.50

### HIGH GRADE POTTER AND BRUMFIELD RELAY

**\$3.50 P-P 95c**

KU series •

240 VAC 50Hz

operation • 3 sets of 240V 10 amp change over contacts • perspex cover and mounting base included • size 50mm X 37mm X 35mm • ex-computer • as new condition. At less than 1/3 of the normal price.



### 8" (20cm) SPEAKER CABINET

**\$8.75**


P-P. NSW. \$2.50  
INTERSTATE \$3.50



EX-AWA

Excellent condition. For wall or desk mounting. Ideal for background music or P-A. 8" speakers to suit — available from — \$6.50.

# Coming Next Month \* \* \*

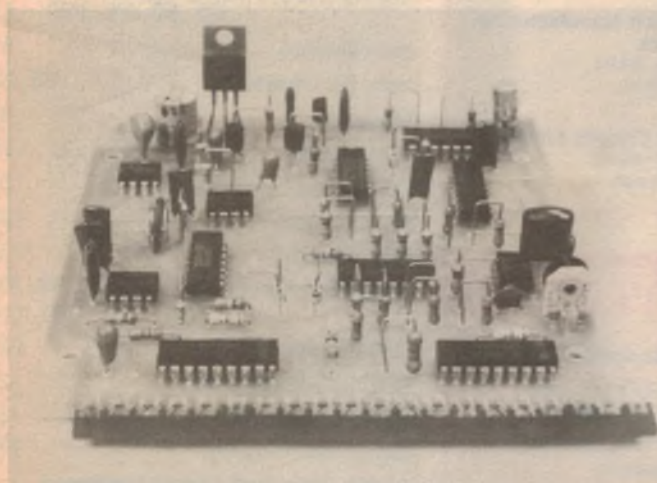

\* Our planning for this issue is well advanced but circumstances may change the final content. However, we will make every attempt to include the articles mentioned here.

**ON SALE:  
Monday, March 7th**

## ◀ ANALOG FUEL CONSUMPTION METER

Featuring a 20-LED bar graph display, this unique circuit displays instantaneous fuel consumption in both litres/100km and litres/hr. Build it for your car and save petrol!

## TOUHLITE DIMMER

This completely new dimmer circuit uses a Siemens IC to turn lamps on and off at a touch, or dim them to any desired level. The circuit also has very effective EMI suppression and has optional remote sensing for two-way or multi-way lamp switching.

## The new "smart" missiles

With names like Exocet, Sidewinder and Seawolf, the new generation "smart" missiles are small, cheap — and deadly accurate. March "Electronics Australia" tells you how they work.

# EA Magazine Holders



The binders and magazine holders are available over the counter from Electronics Australia, 57 Regent Street, Sydney, NSW — Price: \$5.10 binders, \$4.50 holders.

Mail orders should be sent to Electronics Australia, PO Box 163, Chippendale, NSW 2008.

Prices including postage are:

Holders: \$5.50 NSW; \$5.60 other states; or six for \$29.00 NSW; \$31.50 other states, \$A33.00 NZ.

Binders: \$7.00 NSW; \$8.50 other states; or six for \$33.00 NSW; \$36.00 other states, \$A37.00 NZ.

## ADVERTISING INDEX

ADVERTISER	PAGE
Applied Technology	OBC
Amtex	132
Absolute Electronics	117
Ace Radio	135
Adaptive Electronics	125
Altronic Distributors Pty Ltd	68
	IN CENTRE
Ampex	2, IBC
Audio Engineers	49
Australian School of Electronics	86
AWA	35
Audio 2000	9
Bright Star Crystals	61
Calculator & Computer Dist	19
Cobo Int	120
Compsoft	125
C & K Electronics	122
L. E. Chapman	132
Dewart Electronics	19
Dick Smith Electronics Group	10, 11, 28, 52, 54, 55, 72, 73, 89, 91, 98, 106, 121, 127
Ross Erwin Electronics	134
Electronic Agencies	87
Ellistronics	22
Elmeasco	77
Ferguson Transformers	130
Fairchild Aust	20, 21
Harman Aust	37
Jaycar Pty Limited	4, 5, 42, 43, 62, 63, 80, 81, 100, 109
Kalextronics	51
National Panasonic	38, 39
Magraths	60
Parameters	27, 105
David Reid Electronics	36
Mr J. Powell	120
RCS Radio	134
Rod Irving Electronics	30, 31, 46, 92, 93, 110, 115, 116
Royston Electronics	130
Scientific Electronics	29
Soanar Electronics	84
Sony (Aust) Pty Ltd	IFC
Stotts Technical Correspondence College	101
Technical Book & Mag Co	103
Trade Television & Video Service	75
Truscott Electronics	107
Vendale Nominees Ltd	122
Vicom	84
Wireless Institute of Australia	111

## EA PC BOARDS AND FRONT PANELS

Some readers have problems obtaining PC boards and front panels for projects. Many of our advertisers sell these items and their advertisements should be checked in the first instance. Failing that, below is a list of firms which produce or sell PC boards and front panels.

**NSW**  
**Dick Smith Electronics,**  
 125 York Street,  
 Sydney, 2000.  
 Telephone 290 3377.  
 DSE also has branches  
 and resellers throughout  
 Australia.

**Electronic Agencies,**  
 115-117 Parramatta Road,  
 Concord, 2137.  
 Telephone 745 3077.  
 117 York Street,  
 Sydney 2000.  
 Telephone 29 2098.

**Jaycar Pty Ltd,**  
 125 York Street,  
 Sydney 2000.  
 Telephone 264 6688.

**Radio Despatch Service,**  
 869 George Street,  
 Sydney 2000.  
 Telephone 211 0816.

**RCS Radio Pty Ltd,**  
 651 Forest Road,  
 Bexley, NSW 2207.  
 Telephone: 587 3491

**VIC.**  
**Rod Irving Electronics,**  
 425 High Street,  
 Northcote, 3070.  
 Telephone 489 8131.

**Kalextronics,**  
 101 Burgundy Street,  
 Heidelberg 3084  
 Telephone 743 1011.

Shop 11,  
 Regional Shopping Centre,  
 Melton 3338.  
 Telephone 743 1011.

**Sunbury Printed Circuits,**  
 Lot 14, Factory 3,  
 MacDougal Road,  
 Sunbury 3429.  
 Telephone 744 2714

**WA**  
**Altronic,**  
 105 Stirling Street,  
 Perth 6000.  
 Telephone 328 1599.

**Jemal Products,**  
 8/120 Briggs Street,  
 Welshpool, 6106.

**N.Z.**  
**Marday Services,**  
 PO Box 19 189,  
 Avondale, Auckland.

**Mini Tech Manufacturing**  
**Co Ltd,**  
 PO Box 9194,  
 Newmarket.

**Printed Circuits Limited,**  
 PO Box 4248,  
 Christchurch.

## SUBSCRIPTION SERVICE



**ELECTRONICS**  
**Australia**

### Subscription Rates

\$28.00 per year  
 within Australia  
 \$A29.50 per year  
 elsewhere

Make sure you receive every copy of the magazine by ordering it from your newsagent or the publisher. For publisher subscriptions post this coupon, with your remittance to Electronics Australia Subscription Dept., John Fairfax & Sons Ltd, GPO Box 506, Sydney 2001. Subscription will start with first available issue.

Name .....

Address .....

Postcode ..... Enclosed is ..... for ..... years



## The disks of Saturn

In computer peripherals, Ampec has the most advanced technology, and that means real benefits for you.

Ampec's Saturn YD180 floppy disk drive is a double-sided double-density unit; in half-width it gives you double the amount of data storage that industry-standard disk drives offer for the same physical size.

The Saturn YD180 gives you strength and long-term performance. Its full aluminium casting allows rigidity, and maintenance of critical tolerances over long periods.

For power — the YD180 needs only 24V and 5V positive DC power — no AC power is required. In performance, Ampec's YD180 will read and write disks which have been prepared on a YD174, and the same controller as used on a YD174 can be used on this unit.

See the Saturn range from Ampec. They simply run rings around other disk drives.




# AMEC

The absolute in peripheral thinking.

(02) 818 1166 (03) 878 8788 (07) 57 9366 (08) 212 6068 (09) 272 7511




**Business Graphics**



**Arcade Games**



**Educational Programmes**



- ★ **MicroBee — Australia's own educational and personal computer!**
- ★ **Designed and manufactured in Australia.**
- ★ **Over 7,000 sold**
- ★ **Over 2,500 in Australian schools.**



**MicroBee the fully expandable, cost effective computer you have come to know and love is moving ahead with COLOUR — soon to be announced.**

**See us at the Australian Personal Computer Show Centrepoint, Sydney, March 1983.**

*All enquiries to:*  
**Applied Technology**  
 P.O. Box 311, Hornsby, N.S.W. Phone: 487 2711