

BEXT

San Diego

California

Welcome to BEXT

There are three things any company can offer its customers: Quality, Service and Price. It's commonly known that in order to stay in business, no business can offer all three.

At BEXT, we've made a commitment to quality. We have built a reputation around the world for equipment that works and keeps on working, to specifications exceeding any standard. Ask our loyal customers – three pages listing them follow.

When service is required, BEXT stands tall. Our 24-hour hotline has saved many engineers from late night guessing games or all-night panic by assuring them that a fix is correct or that a replacement is on the way.

At the same time, BEXT pricing is low – among the lowest overall pricing structures in the industry. Radio and television broadcasters who discover the quality of our products and the speedy reliability of our service are always surprised by our ability to hold cost down (although, of course, we get no complaints).

How can BEXT offer quality, service *and* value? First, we live within our means. Our offices are the opposite of fancy. Our staff is small – so small, in fact, that you may end up getting to know us all. And our warranty service requirement is extremely light because of the tremendous effort that has gone into producing equipment that works. Our products are tried and true, stable and predictable, and built like tanks.

Second, we don't spend much on advertising. Our entire budget to support a very wide line of equipment is less than many manufacturers spend on a single product. We rely instead on the good will of our customers, who have spread the word about BEXT more efficiently than we ever could anyway.

This catalog is a good example of what we mean. It's functional, it clearly presents the features and benefits of each product, but it's not an expensive display of design talent. We don't think you'd spend your equipment budget on artwork, so neither do we.

What you will find here is a complete list of specifications for each product. If you need more information on features or applications, please feel free to call.

Thank you for considering BEXT.

BEXT REFERENCES RADIO EQUIPMENT USERS, DOMESTIC

These users have made themselves available to discuss BEXT's quality, reliability and service.

ALASKA

CH8 TV Unalaska (PTX 20)
Lynn Fitch 907-581-1888

ARIZONA

KJZZ Phoenix (PTX 20, PTX 80)
Dennis Gilliam 602-834-5627

CALIFORNIA

KACE Inglewood (PTX 80, STL System)
Dave Petric 310-330-3111

KKIQ Livermore (LCR FM Receiver)
John Buckham 415-777-0965

KOIT San Francisco (PJ 250)
John Buckham or Randy Pugsley
415-777-0965

KSAK Walnut (TEX 20)
Bill Watson 714-595-5725

KSON San Diego (TEX 20)
John Buffaloe 619-299-1240

KXXZ Hellendale (T 1800)
Joe Talbot 619-243-5500

COLORADO

KJOL/ Grand Junction (PTX 20, SD STL)
KWBI Al Stewart 303-697-5924

KURA Ouray (1.5 W LC STL System)
Tim Cutforth 303-697-5924

KXKL Denver (PTX 30, T 800)
Ted Nahil 303-832-5665

CONNECTICUT

WINE Brookfield (T 1500, PTX 20, PJ 250)
Patrick Carlone 203-775-1212

WKZE Sharon (TEX 20)
David Groth 203-364-5800

FLORIDA

WCMQ Miami (PTX 20)
Ralph Chambers 305-854-1830

GEORGIA

WADX Trenton (STL System, PJ 500, Tex 20)
Phil Patton 404-657-7594

HAWAII

KIPA Hilo (6 W LCT, HPT- STL)
Alan Roycroft 808-935-6858

KPOA Lahaina, Maui (PTX 80)
Alex Kowalski 808-572-9515

ILLINOIS

WBZM Peoria Heights (TEX 20)
William Bro 309-688-8022

MARYLAND

WJJB Cumberland (T 1200, PTX 80)
Warren Gregory 301-724-6000

MICHIGAN

WKKM Harrison (PTX 20)
Dave Carmine 517-539-7105

WOOCR Olivet (PJ 250)
Stewart Blacklaw 616-749-7598

MINNESOTA

KLQP Madison (1.5 W LC STL System)
Maynard Meyer 612-598-7301

MISSISSIPPI

WBLE Batesville (PTX 20, PJ 250)
J. Boyd Ingram 601-563-4664

WKBZ Drew (TEX 20)
Kirk Harnack 901-278-1306

WVIM Coldwater (TEX 20)
Kirk Harnack 901-278-1307

WURC Holly Springs (PJ 500)
Jerry Campbell (WUMS, University)
601-232-5506

MISSOURI

KDBB Flat River (STL System, T 1800)
Steve Jones 314-431-1000

MONTANA

KYSS Missoula (LC STL, TEX 20)
Mark Ward or Tony Cuesta
406-728-9300

NEW MEXICO

KIVA Albuquerque (PTX 80)
Bill Major 505-897-6937

KKOR/ Gallup (TEX 20)
KYVA Bob Dayton 505-863-6851

NEW YORK

WAMC Albany (PYX 30, LCR FM STL Receiver)
Jim Scholefield 518-465-5233

WBRV Lowville (1.5 W LC STL System)
David Atwood 315-376-8566

WDTS Woodstock (TEX 20)
David Groth 914-679-7266

WNEW New York City (TEX 20)
FM Jerry Turo 212-286-1027

WSLU St. Lawrence University Canton
(FM Receiver, TEX 20)
Bob Sauter 315-379-5356

OHIO

WCVO New Albany (TEX 20, PTX 80,
Composite SD-STL System)
John McKinley 614-475-1747

WRBZ Milford (TEX 20)
Jim Gray 606-781-5715

OREGON

KKRB Klamath Falls (PTX 30, PJ 250)
Dave Quinlan 503-884-3257

KWSA/ Klamath Falls (PTX 80, 15 W SD STL
KCHQ System)
Dave Quinlan 503-884-3257

PENNSYLVANIA

WALY Altoona (PJ 500)
Terry Mac Alarney 814-944-2221

RHODE ISLAND

WQRI Bristol (PJ 250)
Richard Alexander 401-254-3485

SOUTH CAROLINA

WCEZ Columbia (PJ 500)
John George 803-772-5600

TENNESSEE

WBDX Chattanooga (T 1200, TEX 20, PJ 500,
STL System) Parks Hall 615-899-5111

WJSQ Athens (15 W SD STL System,
1.5 W LC STL System)
Jim Sliger 615-745-1000

WOKI Knoxville (1.5 W LC STL System)
Ernie Sutton 615-531-2000

TEXAS

KGNZ Abilene (PTX 80, LC STL Receiver)
James Thompson 915-695-7046

KITE Kerrville (PJ 250)
Ron Whitlock 512-792-4560

WASHINGTON

KGDN Kennewick (T 1800, PJ 100, TEX 20)
Bill Glenn 509-783-0783
Tom Read (TRW Broadcasting) 509-
448-7400

TELEVISION EQUIPMENT USERS, DOMESTIC**CALIFORNIA**

KFTL-TV San Leandro (NS 100)
Matt Tuter 415-632-5385

K67DY-TV Paradise (NS 100S)
Ron Warkenten 916-877-3872

COLORADO

CH 38 Denver (NS 1000S)
Gene Van de Sande 303-671-0938

ILLINOIS

W57AO Robinson (NS 1000S)
Larry Boyd 618-544-3394

NEBRASKA

KTVG-TV Lincoln (NS 1000S)
Steve Kafka 402-476-6000

NEW JERSEY

CHN 36 New Brunswick (NS 1000S)
Mark Simpson 908-249-2600

OHIO

W17AY Seaman (NS 1000S)
Shirley York 513-544-2973

INTERNATIONAL REFERENCES

ANTIGUA

GEM 94 (TEX 20)

AUSTRALIA

GROUP BROADCASTING SERVICES PTY LTD
Wonga Park, Victoria
Herb Libburn 61-3-722-1900 FAX: 61-3-722-1970
(1.5 W SD STL and LC STL Systems)

RF TECHNOLOGY PTY LTD
Hornsby, New South Wales
Ron Tilley 61-2-476-5929 FAX: 61-2-476-4932
(1.5 W LC STL Systems)

BAHAMAS

BROADCASTING CORP OF BAHAMAS
(PTX 80, PJ 500, PJ 250)

CANADA

MARUNO ELECTRONICS (PJ 500)
Toronto, Ontario
Bob Burger 416-255-8231

CHILE

SOQUIMICHI DE CHILE
(PJ 250, PTX 20)

GRAND CAYMAN

RADIO CAYMAN
(TEX 20)

GUATEMALA

FM GLOBO
(PTX 20)

ORGANIZACION ALIUS
(PTX 20)

RADIO MUNDIAL
(TEX 20, TEX 20)

RADIO METROPOLITANA
(PJ 1000, PTX 20)

RADIO CLASE
(PTX 80)

HAITI

RADIO CAP HAITIEN
(PTX 80)

RTHN
(PTX 20)

HONDURAS

SONORAMA MUSICA AMBIENTAL
(TEX 20)

RADIO EXCELSIOR
(TEX 20)

JAMAICA

RADIO JAMAICA
(PTX 80, PJ 1000)

MEXICO

RADIO SONORA, SONORA
(PTX 20 Stereo Generator)

MONTSERRAT

(TEX 20)

NEW ZEALAND

BROADCAST COMMUNICATIONS LIMITED
Auckland
Colin Good 64-9-814-9208 FAX: 64-9-814-9214
(T 5000, PJ 1000, TEX 20, 1.5 W LC STL
System)

BROADTECH SERVICES LTD

Eden Terrace, Auckland
Graham Brown 64-9-776-668X FAX: 64-9-358-
3701(T 5000, PJ 1000, PJ 500, PJ 100, TEX 20,
1.5 W LC STL System)

PACIFIC COMMUNICATIONS SYSTEMS

Auckland
Chris Prouse 64-9-444-0971 FAX: 64-9-444-
0639 (PJ 1000, TEX 20)

PERU

EMPRESA DIFUSORA RADIO TELE
(TEX 20)

STUDIO 5
(PTX 20)

SOUTH AFRICA

TELEMEDIA PTY LTD
Sandton, Republic of South Africa
Peter Bretherick
(TEX 20, PJ 100, PJ 250)
27-11-803-3353 FAX: 27-11-803-2534

ST. MARTEEN

PJD-1 (TEX 20)

BEXT's lab direct line is 619-448-2651. You can also page BEXT's field support services at 619-529-4711 (after the beep, enter your area code and phone number) 24 hours a day, 365 days a year.

Located only minutes away from San Diego's International airport, BEXT has the ability and commitment to help the customer well beyond the standard practice in the industry. That means you will receive customer service that is harder and harder to match.

619-239-8462
FAX: 619-239-8474

BEXT

P2 / P10

Programmable FM Exciters



- Instant front panel programmability in 10 KHz increments
- Extremely compact and lightweight
- 12 VDC operation
- Accommodates additional microphone for local input
- Low power consumption
- Meets or exceeds all FCC and CCIR requirements
- Ideal portable unit for emergency backup and solar or battery powered operation

619-239-8462
FAX: 619-239-8474

P2 / P10

Rated Output Power:

Model P2: 1 to 1.5W \pm 10% dependent on and proportionate to supplied DC voltage. (12 to 13.8VDC allowable)

Model P10: 2.5 /10W switchable \pm 10% dependent on and proportionate to supplied DC voltage. (12 to 13.8VDC allowable)

RF Output Connector / Impedance:

50239 (PL) type connector / 50 ohm

Frequency Range:

87.5 MHz to 108 MHz

Frequency Programmability:

Direct from front panel in 100 KHz increments plus internal jumper for 50 KHz increments

Frequency Stability:

Better than \pm 500 Hz

Spurious Harmonic Suppression:

Meets or exceeds all FCC and CCIR requirements

Modulation Capability:

Meets or exceeds all FCC and CCIR requirements

AM Noise Parameters also affected by the DC power source used:

Asynchronous AM S/N Ratio: Better than 75 dB below reference carrier with 100% amplitude modulation at 400 KHz, without de-emphasis, FM modulation + \pm 75 KHz at 400 Hz

Synchronous AM S/N Ratio: Better than 60 dB below reference carrier with 100% amplitude modulation at 400 KHz, without de-emphasis, FM modulation + \pm 75 KHz at 400 Hz

Stereo Separation:

45 dB or better

Ambient Temperature Range:

0° C to 45° C (32° F to 113° F)

Pre-emphasis:

For FCC, 75 microsec

For CCIR, 50 microsec

Audio Inputs:

One XLR male balanced or unbalanced, switchable by internal jumper, which can be used either for composite/wideband operation or microphone operation (switchable from front panel). Approximate input level for composite/wideband operation, 0 dBm (775 mV RMS / 2.2 V P-P) for 100% modulation. Unit has built-in mic preamp and limiter. Total deviation is adjustable from the front panel.

S/N Ratio:

> 70 dB below \pm 75 KHz deviation at 400 Hz measured in a 30 Hz to 20 KHz bandwidth with 75 microsec de-emphasis (RMS)

Amplitude Response:

\pm 0.5 dB or better, 30 Hz to 15 KHz

\pm 1 dB or better, 30 Hz to 100 KHz

Total Harmonic Distortion:

0.5% or better

DC Power Requirements:

P2: 12 to 13.8 VDC, 1 A (approximate)

P10: 12 to 13.8 VDC, 2.2 A (approximate) at 10 W or 1.3 A (approximate) at 2.5 W

Dimensions:

145 mm x 70 mm x 330 mm

(5 3/4" x 2 3/4" x 13 1/4")

Weight:

P2: 2.5 Kg (5 1/2 lbs)

P10: 2.7 Kg (6 lbs)



Inc.

March 11, 1993

Blake Williams
KKLD
3438 N Country Club
Tucson, AZ 85716
USA

Dear Blake Williams:

Enclosed is the latest catalog with specifications on the the D and L series amplifiers. Also enclosed is a page from the HPT manual regarding the AM noise figures on the HPT exciter. The AM noise figures on the PTX 100 exciter are 70 dB for the asynchronous AM S/N ratio and 65 dB for the synchronous.

Please let me know if you have any further questions.

Best Regards,

Michelle DeFazio
BEXT Inc.

- HPT -

CABINET SIZE

19" (48.26 CM) wide x
5.25" (13.33 cm) high x
19" (48.26 cm) deep.

WEIGHT

37lbs (18Kg)

2.2 TRANSMITTER SPECIFICATIONS

POWER OUTPUT

1 to 20 watts with 1 watt steps

TYPE

Solid state. direct FM
frequency synthesized, crystal
referenced and thermally
compensated.

RF OUTPUT CONNECTOR

Type "N" female, 50Ω

FREQUENCY STABILITY

Better than 5 ppm, 0°C to 40°C

FREQUENCY RANGE

86 to 110 MHz (U.S.) directly
programmable on the front panel
in 10 KHz increments.

MODULATION TYPE

F3 direct FM at the carrier
frequency

ASYNCHRONOUS AM S/N RATIO

80dB below reference carrier
with 100% AM modulation, 75μs
de-emphasis (no FM modulation
present)

SYNCHRONOUS AM S/N RATIO

50 dB below reference carrier
with 100% AM modulation (FM
modulation ±75 KHz)

MULTIMETER

4 function diagnostic aid:
semipeak modulation, field
strength, forward power,
reflected power

AC INPUT POWER

100, 120, 220, 240 VAC 50/60 Hz
150 VA max

AMBIENT TEMPERATURE RANGE

0° to 40°C (operational to -20°
to +50°C)

SPURIOUS AND HARMONIC OR

60 dB or more below carrier
level

MODULATION CAPABILITY


One stereo composite program
(balanced or unbalanced input)
and subcarrier channels (SCA)
up to 100 KHz

Faint, illegible text, possibly bleed-through from the reverse side of the page.

BEXT

TEX 20

Phase Locked Loop Programmable FM Exciter, 87.5 - 108 MHz Range

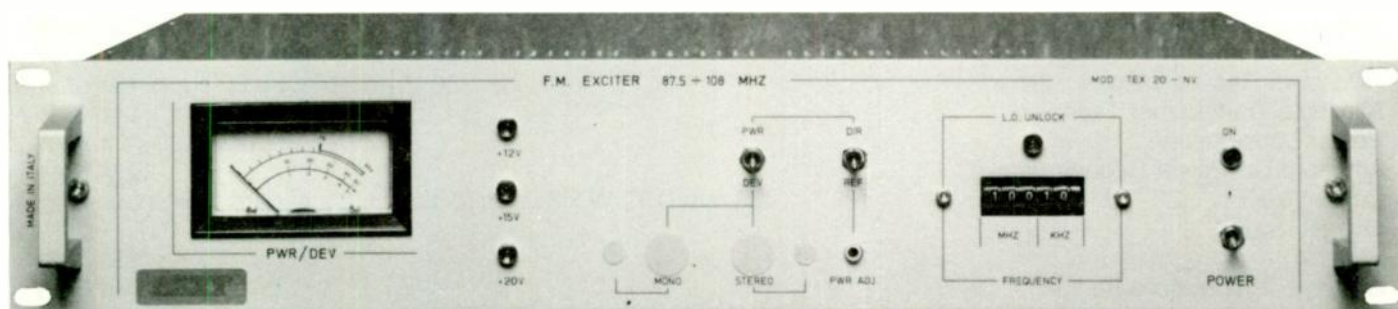

- Instant front panel programmability in 10 KHz increments
- Soft-start from RF mute status
- Adjustable power output from 2 to 20 W with automatic power control maintaining the output at any pre-set level
- Main parameters available also on rear terminal board for remote control
- Compatibility with external references for custom phase locking in synchronous applications
- Meets or exceeds all FCC and CCIR requirements
- High reliability provided by conservatively rated components
- Modular layout with plug-in, easy replaceable circuits and parts
- 24 VDC capability

619-239-8462
FAX: 619-239-8474

TEX 20 Programmable FM Exciter

General

- Rated Output Power: 2-20 W continuously variable (A L C)
- RF Output Connector: "N" type
- RF Output Impedance: 50 Ohm
- Frequency Range: 87.5 MHz to 108 MHz
- Frequency Programmability: direct from front panel in 10 KHz increments
- Frequency Stability: better than +/- 500 Hz
- Modulation Type: direct carrier frequency modulation
- Spurious & Harmonic Suppression: meets or exceeds all FCC and CCIR requirements
- Asynchronous AM S/N Ratio: 65 dB below reference carrier with 100% amplitude modulation at 400 Hz.
Without de-emphasis, no FM modulation present
- Synchronous AM S/N Ratio: 55 dB or better below reference carrier with 100% amplitude modulation at 400 Hz, without de-emphasis, FM modulation = +/- 75 KHz at 400 Hz
- Transient Intermodulation Distortion: less than 0.1% measured with a 3.18 KHz square wave and a 15 KHz sine wave at 100% modulation (typical 0.05%)
- AC Power Requirement: 117 or 230 V, +/- 10%, 50-60 Hz, single phase
- Available Transformer Taps: 100, 120, 220, and 240 V
- Power Consumption: approx 130 W from AC
- Alternate DC Power Requirement: 24 VDC, 4A
- Panel Size: 483 mm (19") W x 88 mm (3 1/2")H (2 standard rack spaces high)
- Overall Depth: 327 mm (13")
- Weight: 7 Kg (15 1/2 lbs)
- Ambient Temperature Range: 0 C to 45 C (32 F to 113 F)
- Pre-emphasis: for FCC 75 microsec, for CCIR 50 microsec

Composite Operation

- Composite Inputs: four total, 1 for MPX and 3 for SCA
- MPX Input: 1 unbalanced BNC connector
- MPX Input Impedance: 10 Kohm
- MPX Input Level: 0 dBm (775 mV RMS/2.2 V P-P)
- Composite FM S/N ratio: > 75 dB below +/- 75 KHz deviation at 400 Hz measured in a 30 Hz to 100 KHz bandwidth with 75 microsecond de-emphasis (RMS)
- Composite Amplitude Response: +/- 0.8 dB, 30 Hz to 100 KHz
- Composite Total Harmonic Distortion: < 0.1% (0.05% typical)
- Composite Intermodulation Distortion: 0.05% or less, measured with a 1 KHz and a 1.3 KHz tones, 1:1 ratio, at 100% modulation
- Stereo Separation: > 40 dB (45 dB typical)
- Crosstalk: main to stereo subchannel and stereo subchannel to main >55 dB (60 dB typical)
- SCA Inputs: 3 unbalanced BNC connectors
- SCA Input Impedance: 10 Kohm
- SCA Input Levels: 0 dBm (775 mV RMS/2.2 V P-P) nominal for +/- 7.5 KHz deviation, adjustable
- SCA Amplitude Response: +/- 0.8 dB, 40 KHz to 100 KHz
- Crosstalk: 67 KHz SCA to main or to stereo subchannel >65 dB
- Crosstalk: 92 KHz SCA to main or to stereo subchannel >70 dB


Monaural Operation

- Audio Input Impedance: 600 Ohm balanced or unbalanced; 50 dB common mode suppression
- Audio Input Level: 0 dBm (775 mV RMS/2.2 V P-P) for +/- 75 KHz, adjustable
- FM S/N Ratio: > 70 dB below +/- 75 KHz, deviation at 400 Hz measured in a 30 Hz to 20 KHz bandwidth with 75 microsecond de-emphasis (RMS)
- Audio Frequency Response: +/- 0.8 dB, 30 Hz to 15 KHz
- Total Harmonic Distortion: < 0.1% (0.05% typical)
- Intermodulation Distortion: 0.05% or less, measured with a 1 KHz and a 1.3 KHz tones, 1:1 ratio, at 100% modulation

BEXT

PTX 30

Programmable FM Exciter

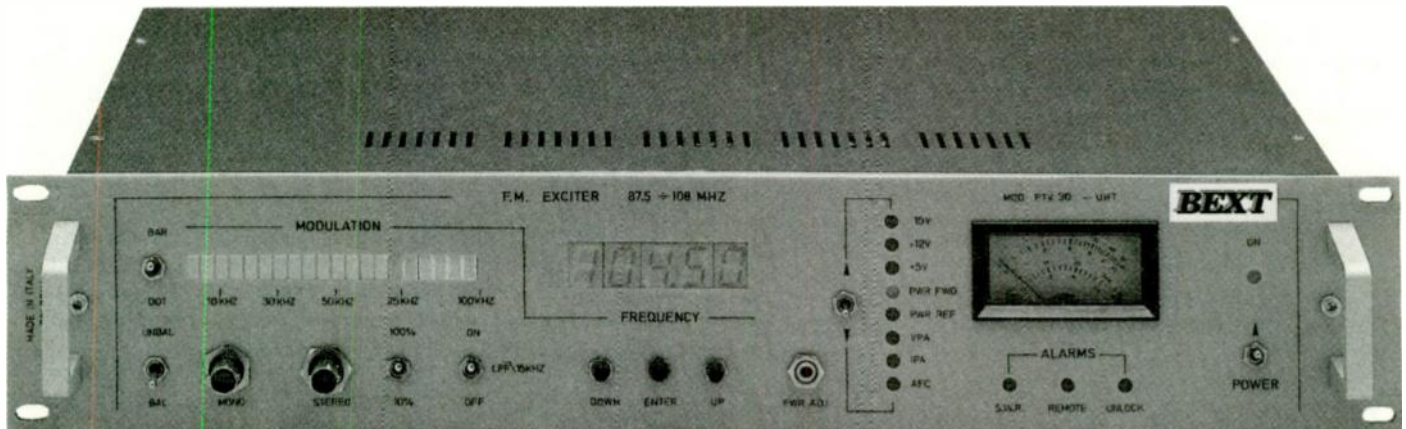

- Direct and easy frequency programmability through microprocessor controlled 10 KHz steps
- Excessive SWR automatic protection with RF power cutback and indicator light
- Two to 30 W continuously adjustable output power with automatic power level control
- Expanded reflected power scale
- Display of all operating parameters: forward power, reflected power, DC voltages, PA current, PLL voltage
- Remote controlled RF mute, compatible with all types of external requirements
- LED modulation meter with peak indicator and expanded scale for stereo or SCA subcarrier readings
- Selectable linear input or 15 KHz low-pass filter mono input
- Wideband MPX input >100 KHz
- Available with RS 232 interface for frequency programmability and RF mute
- Available with three additional SCA inputs and rear terminal board with all main parameters
- Modular layout with internal flat cables and connectors

619-239-8462
FAX: 619-239-8474

PTX 30 Programmable FM Exciter

General

- Rated Output Power: 2-30 W continuously variable (A L C)
- RF Output Connector: "N" type
- RF Output Impedance: 50 Ohm
- Frequency Range: 87.5 MHz to 108 MHz
- Frequency Programmability: direct from front panel in 10 KHz increments
- Frequency Stability: better than +/- 500 Hz
- Modulation Type: direct carrier frequency modulation
- Spurious & Harmonic Suppression: meets or exceeds all FCC and CCIR requirements
- Asynchronous AM S/N Ratio: 65 dB below reference carrier with 100% amplitude modulation at 400 Hz. Without de-emphasis, no FM modulation present
- Synchronous AM S/N Ratio: 55 dB or better below reference carrier with 100% amplitude modulation at 400 Hz, without de-emphasis, FM modulation = +/- 75 KHz at 400 Hz
- Transient Intermodulation Distortion: less than 0.1% measured with a 3.18 KHz square wave and a 15 KHz sine wave at 100% modulation (typical 0.05%)
- AC Power Requirement: 117 or 230 V, +/- 10%, 50-60 Hz, single phase
- Available Transformer Taps: 100, 120, 220, and 240 V
- Power Consumption: approx 180 W from AC
- Panel Size: 483 mm (19") W x 88 mm (3 1/2") H (2 standard rack spaces high)
- Overall Depth: 327 mm (13")
- Weight: 8 Kg (17 1/2 Lbs)
- Ambient Temperature Range: 0 C to 45 C (32 F to 113 F)
- Pre-emphasis: for FCC: 75 microsec; for CCIR: 50 microsec

Composite Operation

- Composite Inputs: four total, 1 for MPX and 3 for SCA
- MPX Input: 1 unbalanced BNC connector
- MPX Input Impedance: 10 Kohm
- MPX Input Level: 0 dBm (775 mV RMS/2.2 V P-P)
- Composite FM S/N ratio: > 85 dB below +/- 75 KHz deviation at 400 Hz measured in a 30 Hz to 100 KHz bandwidth with 75 microsecond de-emphasis (RMS)
- Composite Amplitude Response: +/- 0.5 dB, 30 Hz to 100 KHz
- Composite Total Harmonic Distortion: < 0.05% (0.02% typical)
- Composite Intermodulation Distortion: 0.05% or less, measured with a 1 KHz and a 1.3 KHz tone, 1:1 ratio, at 100% modulation
- Stereo Separation: > 45 dB (50 dB typical)
- Crosstalk: main to stereo subchannel and stereo subchannel to main >55 dB (60 dB typical)
- SCA Inputs: 3 unbalanced BNC connectors
- SCA Input Impedance: 10 Kohm
- SCA Input Levels: 0 dBm (775 mV RMS/2.2 V P-P) nominal for +/- 7.5 KHz deviation, adjustable
- SCA Amplitude Response: +/- 0.5 dB, 40 KHz to 100 KHz
- Crosstalk: 67 KHz SCA to main or to stereo subchannel >65 dB
- Crosstalk: 92 KHz SCA to main or to stereo subchannel >70 dB


Monaural Operation

- Audio Input Impedance: 600 Ohm balanced or unbalanced; 50 dB common mode suppression
- Audio Input Level: 0 dBm (775 mV RMS/2.2 V P-P) for +/- 75 KHz, adjustable
- FM S/N Ratio: > 75 dB below +/- 75 KHz, deviation at 400 Hz measured in a 30 Hz to 20 KHz bandwidth with 75 microsecond de-emphasis (RMS)
- Audio Frequency Response: +/- 0.5 dB, 30 Hz to 15 KHz
- Total Harmonic Distortion: < 0.05% (0.03% typical)
- Intermodulation Distortion: 0.05% or less, measured with a 1 KHz and a 1.3 KHz tone, 1:1 ratio, at 100% modulation

BEXT

PTX 100

Phase Locked Loop FM Exciter Mono or Stereo, 87.5 - 108 MHz Range

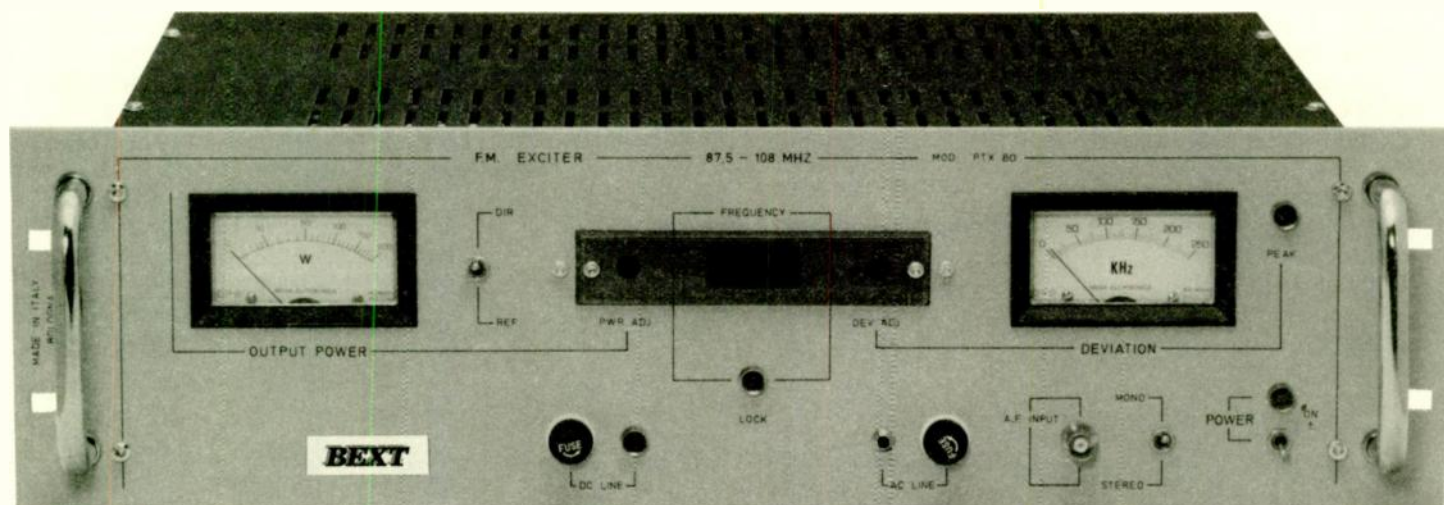

- High power output capability in compact size cabinet
- High modulation capability
- Ultra linear modulated oscillator which provides superior performance in any stereo and/or SCA transmission
- Direct and easy programmable frequency via thumbwheel switches
- Broadband solid state chain amplifier which provides full power over entire FM band without tuning requirements
- Adjustable power output from 5 to 100 W
- Meets or exceeds all FCC and CCIR requirements
- Convenient display of all operating parameters through complete yet simplified front control panel
- High reliability provided by conservatively rated components
- Easily replaceable standard components

619-239-8462
FAX: 619-239-8474


PTX 100 Programmable FM Exciter

- Power Output: 5 - 100 w continuously variable
- Frequency Range: 87.5 - 108 MHz directly programmable in 100 KHz increments (others on request)
- RF Output Impedance: 50 Ohm, N connector
- Frequency Stability: +/- 500 Hz 0 to 50 C (Typ +/- 300)
- Modulation Capability, Spurious and Harmonic Suppression: exceeds all FCC and CCIR requirements
- Pre-emphasis (specify): for FCC: 75 microsec; for CCIR: 50 microsec
- AC Input Power: 100 - 125 V or 198 - 250 V 50 - 60 Hz (others available on request)
- Wideband Input: 5 K Ohm unbalanced, composite-SCA compatible
- Input Level: 3.5 V P-P nominal for +/- 75 KHz deviation
- Wideband Amplitude Response: +/- 0.1 dB 30 KHz to 100 KHz
- Composite FM S/N Ratio: 70 dB below +/- 75 KHz deviation at 400 Hz measured with 75 microsecond de-emphasis
- Harmonic Distortion: < 0.3%
- Stereo Separation available with optional built-in stereo generator: better than 40 dB
- Panel Dimensions: 483 mm (19") W x 132 mm (5.3") H
- Cabinet Dimensions: 420 mm (16.54") W x 122 mm (4.8") H x 350 mm (13.78") D
- Weight: 12 Kg (26 Lbs)

BEXT

HPT

HPT FMR, HPT STL and HPT SGN High Performance Booster/Transmitter/Translator

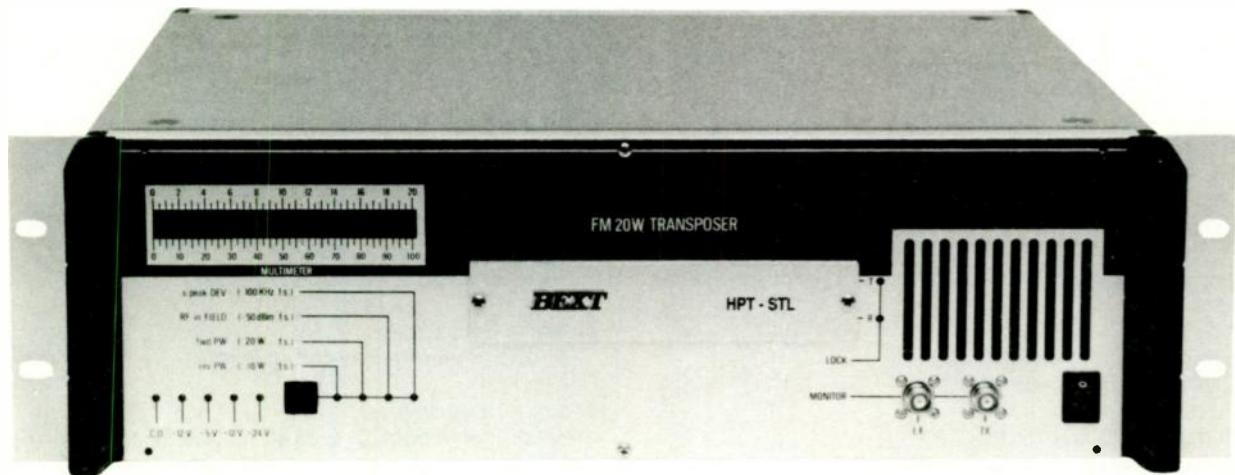

- Programmable composite receiver and programmable FM transmitter in one single unit, with input for local audio
- Receiver portion available for the 88-108 MHz FM band or for the 945-952 MHz STL band
- Superior MPX and SCA performance
- Excellent RF immunity, designed to withstand the most hostile RF environments
- DC input for direct hookup with backup battery
- Available as a L&R input only unit, also with built-in stereo generator (HPT SGN) for satellite-fed translators
- FSK keyer available
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

HPT FMR, HPT STL, and HPT SGN High Performance Booster/Transmitter/Translator

Input Frequency Range:
87.5 to 108 MHz (HPT FMR)
or 945 - 952 MHz (HPT STL)

Programmability:
Front panel digiswitch

Sensitivity:
Monaural (demodulated, de-emphasized):
5 microV for S/N > 50 dB
15 microV for S/N > 60 dB
50 microV for S/N > 65 dB
150 microV for S/N > 70 dB
1.5 milliv for S/N > 80 dB
10 microV for >60 dB S/N, typical

Composite (left or right channel, demodulated, de-coded, de-emphasized):
5 microV for S/N > 30 dB
15 microV for S/N > 40 dB
50 microV for S/N > 55 dB
150 microV for S/N > 60 dB
1.5 milliv for S/N > 75 dB
100 microV for >60 dB S/N, typical

Selectivity (static):
3 dB IF bandwidth +/- 150 KHz
60 dB IF bandwidth +/- 500 KHz
80 dB IF bandwidth +/- 600 KHz

Selectivity (dynamic):
Adjacent-channel selectivity, ratio of interfering to desired signal:
12 dB or better +/- 300 KHz
38 dB or better +/- 400 KHz
45 dB or better +/- 500 KHz
50 dB or better +/- 600 KHz

Distortion, THD:
Stereo demodulated, decoded and de-emphasized:
30 Hz to 15 KHz: <0.1% (typ 0.05% @ 1KHz)
Mono demodulated and de-emphasized:
30 Hz to 7.5 KHz: <0.1% (typ 0.02% @ 1 KHz)

Distortion, IMD:
Intermodulation at demodulated output, two tone with 1 KHz difference in frequency:
5 - 15 KHz, D2 < 0.05% D3 < 0.1%
15 - 53 KHz, D2 < 0.12% D3 < 0.3%

Stereo Separation:
50 dB or better, 30 Hz to 15 KHz (typically 55 dB or better)

Crosstalk:
50 dB or better, stereophonic subchannel to main channel

Output Frequency Range:
87.5 to 108 MHz

Spurious Emissions:
100 dBc or more below carrier level

Harmonic Emissions:
65 dBc or more below carrier level

Frequency Stability:
Better than 5 ppm, 0° C to 40° C (+32° F to +104° F)

Modulation Type:
Direct FM at the carrier frequency

Modulation Capability:
One stereo MPX program and subcarrier channels (up to 100 KHz baseband)

Composite Phase Response:
+/- 0.5 degrees from linear phase, 30 Hz - 53 KHz

AC Input Power:
120 or 240 VAC, 120 VA


Dimensions:
483 mm (19") W x 132 mm (5 1/4") H (3 standard rack spaces high) x 483 mm (19") D

Net Weight:
19 Kg (42 Lbs)

BEXT

LCR FM and LCR STL

Composite Receivers

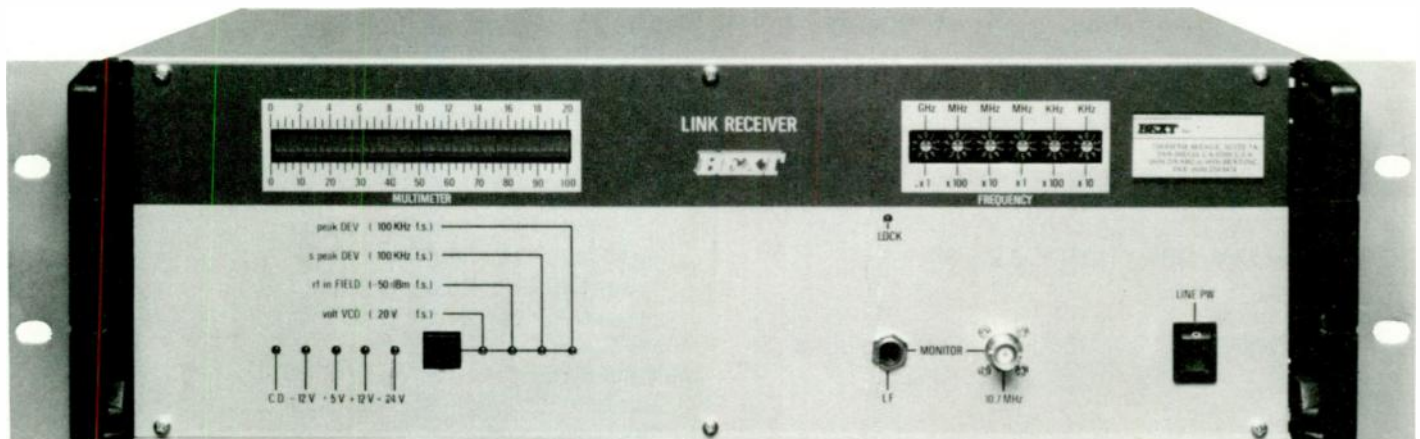

- 75 dB or better S/N
- Available for the 87.5 - 108 MHz FM band or for the 940 - 960 MHz STL band
- Direct front panel programmability
- Superior MPX and SCA performance
- Excellent RF immunity receiver, designed to withstand the most hostile RF environments
- Excellent adjacent channel rejection
- 50 dB minimum stereo separation
- 12 VDC input for direct hook-up to back-up battery
- Ideal for translator/booster applications in conjunction with one of the BEXT excitors and amplifiers (where allowed by the FCC)
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474


LCR FM and LCR STL Composite Receiver

| | |
|---|--|
| Frequency Range: 87.5 to 108 MHz (LCR FM) or 940 - 960 MHz (LCR STL) | Composite (left or right channel, demodulated, de-coded, de-emphasized): 5 microV for S/N > 30 dB 15 microV for S/N > 40 dB 50 microV for S/N > 55 dB 150 microV for S/N > 60 dB 1.5 milliV for S/N > 75 dB For 60 dB S/N, 100 microV typically required |
| Frequency Response: +/- 0.3 dB or better, 30 Hz to 53 KHz +/- 0.5 dB or better, 53 KHz to 75 KHz | Selectivity (static): 3 dB if bandwidth +/- 150 KHz 60 dB if bandwidth +/- 500 KHz 80 dB if bandwidth +/- 600 KHz |
| Distortion, THD: Stereo demodulated, decoded and de-emphasized: 30 Hz to 15 KHz: <0.1% (typ 0.05% @ i KHz) Mono demodulated and de-emphasized: 30 Hz to 7.5 KHz: <0.1% (typ 0.02% @ i KHz)) | Selectivity (dynamics): adjacent-channel selectivity, ratio of interfering to desired signal +/- 300 KHz 12 dB or better +/- 400 KHz 38 dB or better +/- 500 KHz 45 dB or better +/- 600 KHz 50 dB or better |
| Distortion, IMD: Intermodulation at demodulated output, two tone with 1 KHz difference frequency: 5 - 15 KHz, D2 < 0.05% D3 < 0.1% 15 - 53 KHz, D2 < 0.12% D3 < 0.3% | Multimeter: four function diagnostic aid, peak and semi-peak modulation meter |
| Stereo Separation: 50 dB or better, 30 Hz to 15 KHz (typically 55 dB or better) | Outputs: 4 BNC's with + and - polarity available, balanced and unbalanced and a 6.3 mm jack female for headphones IF 10.7 MHz: BNC connector Carrier detector: BNC connector All levels are factory set for 0 dBm (775 mV RMS/2.2 V P-P), adjustable in the -1 to +7 dBm range |
| Crosstalk: 50 dB or better, stereophonic subchannel to main channel | Ambient Temperature Range: 0° C to 40° C (+32° F to +104° F) [Operational to -20° C to +50° C (-4° F to +122° F)] |
| Crosstalk: 50 dB or better, main channel to stereophonic subchannel | AC Input Power: 120 or 240 VAC 50/60 Hz, 30 VA |
| Signal to Noise Ratio (mono): 80 dB or better, typically 85 dB with 75 KHz deviation and 400 Hz frequency modulation | DC Input Power: 12.5 V (+/-0.1 V) 2 A, 10 mV P-P max ripple |
| Signal to Noise Ratio (stereo): 75 dB or better, typically 80 dB with 75 KHz deviation, demodulated, de-emphasized left or right | Front Panel Size: 483 mm (19") W x 132 mm (5 1/4") H (3 standard rack spaces high) |
| RF Input Connector/Impedance: Type "N" female/50 Ohm | Overall Depth: 483 mm (19") |
| Frequency Programmability: From front panel, with internal fine adjustment | Net Weight: 12 Kg (26.4 Lbs) |
| Sensitivity: Monaural (demodulated, de-emphasized): 5 microV for S/N > 50 dB 15 microV for S/N > 60 dB 50 microV for S/N > 65 dB 150 microV for S/N > 70 dB 1.5 milliV for S/N > 80 dB For 60 dB S/N, 10 microV typically required | |

BEXT

PJ 100, PJ 200 and PJ 250

Solid State FM Amplifiers

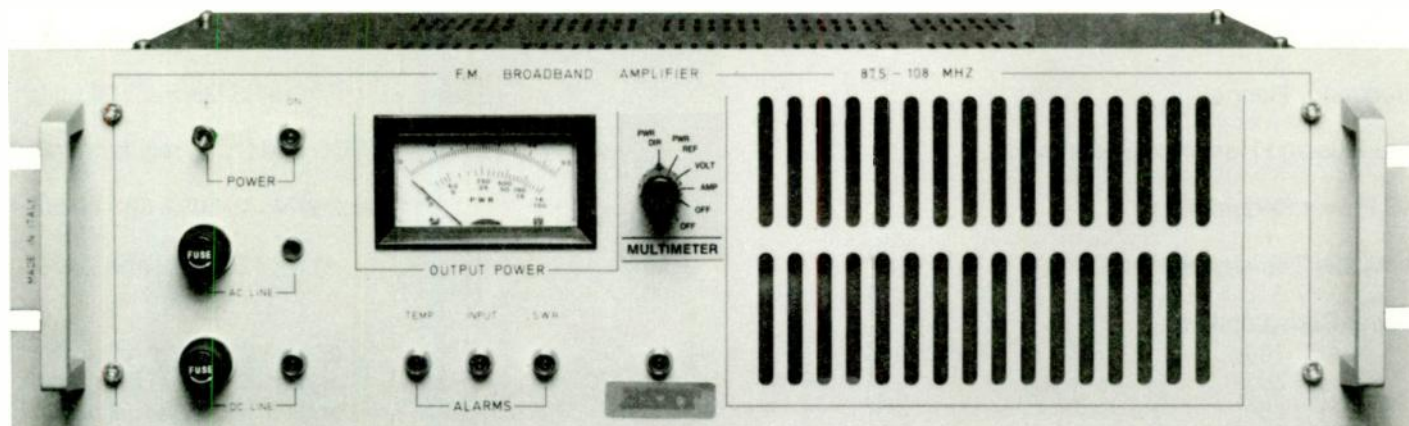

- Completely broadband amplifiers, no tuning required
- Compact size with built-in power supply
- Simple and rugged power supply, providing easy access, overload protection and fuse failure indicator lights
- VSWR, excessive temperature and excessive drive power protections, with indicator lights, which will put the transmitter driver in stand-by status in the event of failure
- Advanced recycling overload and protection system that provides automatic re-start after about 90 seconds of stand-by in case of fault. This procedure is repeated four times and in case of persisting fault, the cycle re-starts again after 15 minutes, for four more times. If fault still persists, the stop becomes permanent. If instead, during one of the re-starts, the fault disappears, the counting circuit system is reset after a regular working period of 15 minutes.
- Full remote control capability, with all main parameters in rear terminal board
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

Technical Specifications

BEXT

PJ 100, 200, and 250 Solid State FM Amplifiers

| | |
|------------------------------------|---|
| Rated Output Power: | |
| For PJ 100: | 100 W (range 25 - 100 W) |
| For PJ 200: | 200 W (range 50 - 200 W) |
| For PJ 250: | 250 W (range 100 - 250 W) |
| RF Drive Requirement: | |
| For PJ 100: | 15 - 20 W |
| For PJ 200: | 15 - 20 W |
| For PJ 250: | 25 - 30 W |
| RF Output Connector/Impedance: | "N" Type/50 Ohm |
| Frequency Range: | 87.5 MHz to 108 MHz |
| Spurious and Harmonic Suppression: | Meets or exceeds all FCC and CCIR requirements |
| AC Power Requirements | 117 or 230 V, +/- 10%, 50 - 60 HZ |
| Available Transformer Taps: | 110, 120, 220, and 240 V |
| Power Consumption: | |
| For PJ 100: | approx 275 W at full power |
| For PJ 200: | approx 500 W at full power |
| For PJ 250: | approx 650 W at full power |
| Panel Size: | 483 mm (19") W x 132 mm (5 1/4") H (3 standard rack spaces high) |
| Overall Depth: | 340 mm (13 1/2") |
| Weight: | |
| PJ 100: | 15 Kg (33 Lbs) |
| PJ 200: | 17 Kg (38 Lbs) |
| PJ 250: | 17 Kg (38 Lbs) |
| Ambient Temperature Range: | 0° C to 45° C (32° F to 113° F) |


619-239-8462
FAX: 619-239-8474

Features and specifications subject to change without notice.

BEXT

PJ 501

FM Broadband Mosfet Amplifier, 87.5 - 108 MHz Range

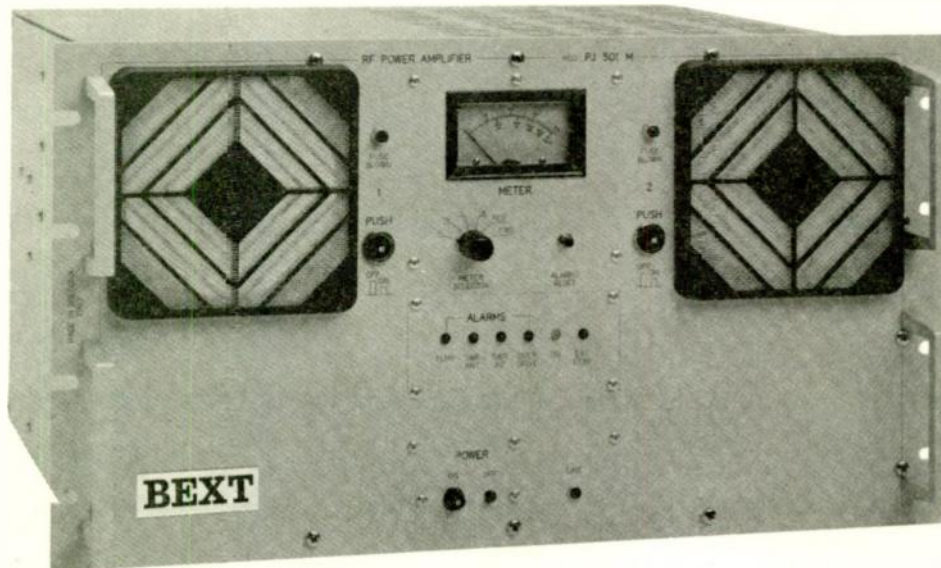

- Very high efficiency Mosfet technology amplifier
- High gain PA, typically capable of more than 500 W output power with only 10 - 15 W drive input power
- Automatic gain control providing fixed output power even in case of fluctuating drive power
- High reliability, easy handling and consistent performance standard achieved among the various units due to total absence of tuning requirements
- VSWR, excessive temperature and excessive drive power protection, with indicator lights, which will put the transmitter driver in stand-by position in the event of failure
- Compact size with built-in high-efficiency switching power supply, providing easy access and an overload reset system with indicator lights
- Meets or exceeds all FCC and CCIR requirements
- Easily replaceable standard components
- Advanced recycling overload and protection system that provides automatic re-start after about 90 seconds of stand-by in case of fault. This procedure is repeated four times and in case of persisting fault, the cycle re-starts again after 15 minutes, for four more times. If fault still persists, the stop becomes permanent. If instead, during one of the re-starts the fault disappears, the counting circuit system is reset after a regular working period of 15 minutes.
- Full remote control capability, with all main parameters on rear terminal board

619-239-8462
FAX: 619-239-8474

Technical Specifications



PJ 501 Mosfet FM Amplifier

| | |
|-------------------------------------|---|
| AC Input power: | 100-130V or 198-250V, 50-60 Hz (others available on request) |
| Frequency range: | 87.5-108 MHz (other frequencies on request) |
| Rated Output Power: | 500 W |
| RF Output Connector/Impedance: | "N" Connector/50 Ohm |
| RF Input Connector/Impedance: | "N" Connector/50 Ohm |
| Spurious and Harmonic Suppression: | Meets or exceeds all FCC and CCIR requirements |
| Available Transformer Taps: | 110, 115, 220, and 230 V |
| Power Consumption: | Approx. 900 W at full power |
| Panel Size of the Amplifier: | 483 mm (19") W x 264 mm (10 1/2") H (six standard rack spaces high) |
| Total Depth Requirement: | 420 mm (16 1/4") max |
| Weight: | 30 Kg (66 Lbs) |
| Required Ambient Temperature Range: | 0° C to 45° C (32° F to 113° F) |


619-239-8462
FAX: 619-239-8474

Features and specifications subject to change without notice.

BEXT

PJ 1002

FM Broadband Mosfet Amplifier

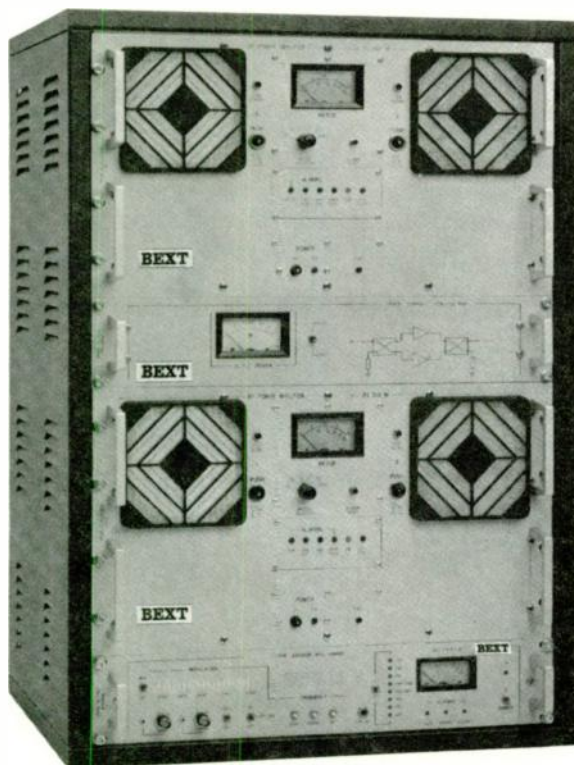

- Totally modular high efficiency Mosfet technology amplifier comprised of two separate PJ 501 amplifiers and a “state of the art” combiner system
- Exceptionally high gain PA with relatively low input
- High gain PA, typically capable of more than 1000 watts of output power with 25-30 W of drive power
- Automatic gain control providing fixed output power even in case of fluctuating drive power
- High reliability, easy handling and consistent performance due to total absence of tuning requirements
- VSWR, excessive temperature and excessive drive power protection, with indicator lights, which will put the transmitter driver in stand-by status in the event of failure
- Advanced recycling overload and protection system that provides automatic re-start after about 90 seconds of stand-by. In case of fault this procedure is repeated four times and in case of persisting fault, the cycle re-starts again after 15 minutes, for four more times. If the fault still persists, the stop becomes permanent. If instead, during one of the re-starts the fault disappears, the counting circuit system is reset after a regular working period of 15 minutes.
- Compact size with built-in high-efficiency switching power supply, providing easy access and an overload reset system with indicator lights
- Full remote control capability, with all main parameters on rear terminal board
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

Technical Specifications



PJ 1002 Mosfet FM Amplifier

| | |
|--|---|
| AC Input power: | 100-130V or 198-250V, 50-60 Hz (others available on request) |
| Frequency range: | 87.5-108 MHz (other frequencies on request) |
| Rated Output Power: | 1000 W (range 500 - 1000 W) with approx 25 - 30 W drive |
| RF Output Connector/Impedance: | EIA 7/8" flange or LC/50 Ohm |
| RF Input Connector/Impedance: | "N" Connector/50 Ohm |
| Spurious and Harmonic Suppression: | Meets or exceeds all FCC and CCIR requirements |
| Available Transformer Taps: | 110, 115, 220, and 230 V |
| Power Consumption: | Approx. 1900 W at full power |
| Layout Description: | Two separate PJ 501 amplifier modules and one FM combiner, standard rack mountable (rack cabinet optional) |
| Panel Size of Each 500 W Amplifier Module: | 483 mm (19") W x 264 mm (10 1/2") H (six standard rack spaces high) |
| Panel Size of Combiner: | 483 mm (19") W x 132 mm (5 1/4") H (three standard rack spaces high) |
| Cabinet Depth of Amplifiers and Combiner: | 420 mm (16 1/4") max |
| Total Panel Space Requirement: | 483 mm (19") W x 660 mm (26 1/4") |
| Total Depth Requirement: | 420 mm (16 1/4") max |
| Weight of Each Separate PJ 501 Amplifier Module: | 30 Kg (66 Lbs) |
| Weight of Combiner: | 10 Kg (22 Lbs) |
| Total Weight: | 70 Kg (154 Lbs) |
| Required Ambient Temperature Range: | 0° C to 45° C (32° F to 113° F) |

619-239-8462
FAX: 619-239-8474

Features and specifications subject to change without notice.

BEXT

T 800, T 1200, T 1500, T 1800 and T 2000

FM Amplifiers



- Compact size, fits into standard 19" rack cabinets
- Single tube
- Field proven, stable and reliable grounded grid configuration for long tube life
- No neutralization required
- Conservatively rated parts and components
- Simple and rugged construction
- Easy access to internal parts
- Modular design for easy maintenance
- Ample metering of all operating parameters
- Compatible with remote control systems
- Protections on all main parameters with automatic restarting
- Temperature protected power transformer, vacuum saturated with epoxy, employing an electrostatic shield between the windings
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

T 800, T 1200, T 1500, T 1800, and T 2000 FM Amplifiers

Output Power:

| | |
|--------|--------|
| T 800: | 800 W |
| T1200: | 1200 W |
| T1500: | 1500 W |
| T1800: | 1800 W |
| T2000: | 2000 W |

Tube:

| | |
|---------------|------------------|
| T 800: | Eimac 3CX 800 A7 |
| Other Models: | Eimac 3CX1500 A7 |

Frequency Range: 87.5-108 MHz

Gain:

| | |
|---------|---------|
| T 800: | 15 dB |
| T 1200: | 16 dB |
| T 1500: | 15.7 dB |
| T 1800: | 15.5 dB |
| T 2000: | 15.2 dB |

Output Connector: 7/8" or any Bird QC compatible

Input Connector: "N" type

Input and Output Impedance: 50 Ohm

Drive Requirement (Approx.):

| | |
|---------|---|
| T 800: | 20-25 W |
| T 1200: | for 1200 W output 28 W for 1000 W output 20-25 W |
| T 1500: | for 1500 W output 40 W for 1000 W output 25-30 W |
| T 1800: | for 1800 W output 50 W for 1000 W output 25-30 W |
| T 2000: | for 2000 W output 60 W for 1000 W output 25-30 W |

Filament Voltage: Electronically Regulated

AC Requirement:

All except T 2000: 208-240 V, 50/60 Hz, single phase
T 2000: 240 V, three phase

Power Consumption:

| | |
|---------|-----------|
| T 800: | < 2.2 KVA |
| T 1200: | < 3.0 KVA |
| T 1500: | < 4.3 KVA |
| T 1800: | < 5.2 KVA |
| T 2000: | < 4.3 KVA |

Protection Circuits: SWR, temperature, grid current, plate current, airflow failure, filament voltage, bias voltage transformer temperature, line overvoltage

Reset Procedure: Automatic (8 resets) auto lockout after 8 resets/restarts + displays number of interventions

Amplifiers are remote control ready

Dimensions: Fit into standard 19" rack cabinets, 8 rack spaces required (14" panel space high)

| | |
|---------|----------------|
| Height: | 35.52 cm (14") |
| Width: | 48.26 cm (19") |
| Depth: | 64 cm (25") |


Weight:

| | |
|---------|--------------------|
| T 800: | 90 Kg (198 Lbs) |
| T 1200: | 93 Kg (204.5 Lbs) |
| T 1500: | 96 Kg (211.25 Lbs) |
| T 1800: | 100 Kg (220 Lbs) |
| T 2000: | 100 Kg (220 Lbs) |

BEXT

T 5000

FM Amplifier

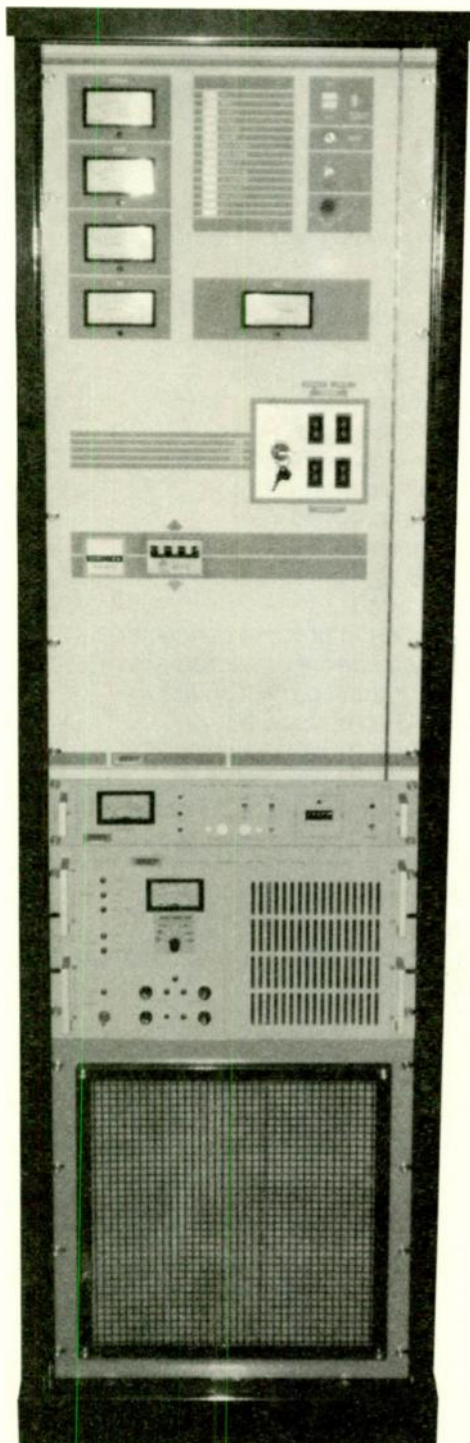

- Compact size, standard 19" rack
- Single tube
- Field proven, stable and reliable grounded grid configuration for long tube life
- Excellent tube performance and modulation capability due to non-capacitive high efficiency coaxial anode circuit
- Conservatively rated parts and components
- Simple and rugged construction
- Easy access to internal parts
- Oversized cooling system
- Modular design for easy maintenance
- Ample metering of all operating parameters
- Compatible with remote control systems
- Protection on all parameters with automatic re-starting
- Dual speed motorized tuning controls
- Temperature protected power transformer, vacuum saturated with epoxy, employing an electrostatic shield between the windings
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

T 5000 FM Amplifier

Output power: 5000 W

Tube: Eimac 3CX3000A7

Frequency range: 87.5-108 MHz

Gain: > 15.2 dB

Output Connector: 1 5/8" EIA flange

Input Connector: "N" type

Input and Output Impedance: 50 Ohms

Drive requirements with high bias configuration

(60 V, 3Z, 430 KHz / 0.1 dB S.A.M.):

for 5000 W output: 380 W (+/- 20 W)

for 3500 W output: 245 W (+/- 15 W)

for 3000 W output: 210 W (+/- 15 W)

Drive requirements with medium bias configuration

(42 V, 2Z, 300 KHz / 0.1 dB S.A.M.):

for 5000 W output: 310 W (+/- 15 W)

for 3500 W output: 245 W (+/- 15 W)

for 3000 W output: 180 W (+/- 15 W)

Drive requirements with low bias configuration

(24 V, 1Z, 250 KHz / 0.1 dB S.A.M.):

for 4500 W output: 260 W (+/- 15 W)

for 4000 W output: 225 W (+/- 15 W)

for 3000 W output: 165 W (+/- 10 W)

Filament Voltage: Electronically regulated

AC Requirement: 208-240 V or 380 V, 50/60 Hz three phase

Power Consumption:

for 5000 W output < 9.8 KVA

for 3500 W output < 7.5 KVA

for 3000 W output < 7 KVA

Protection circuits: SWR, temperature, grid current, plate current, airflow failure, filament voltage, bias voltage, transformer temperature, phase failure from AC line, fan motor failure, line overvoltage

Reset procedure: Automatic (8 resets) auto lockout after 8 resets/restarts, displays numbers of interventions

Amplifier is remote control ready

Dimensions:

Height 164 cm (64.5")

Width 57 cm (22.4")

Depth 72 cm (28.3")

Weight 350 Kg (770 Lbs)


Metering:

- Direct power
- Reflected power
- Anode current
- Grid current
- Anode voltage
- Bias voltage
- Filament voltage
- Temperature
- Hour meter
- Indicator lights for:
 - Power on
 - Door open or loose connector
 - Anode current protection active
 - Grid control protection active
 - VSWR protection active
 - Cavity temperature protection active
 - Transformer temperature protection active
 - Filament voltage protection active
 - Bias voltage protection active
 - Fan fault protection active
 - Anode insertion timer status
 - Anode power-up status
 - Shutdown after maximum number of fault conditions

BEXT

T 12000, T 15000, T 20000, T 30000

FM Amplifiers

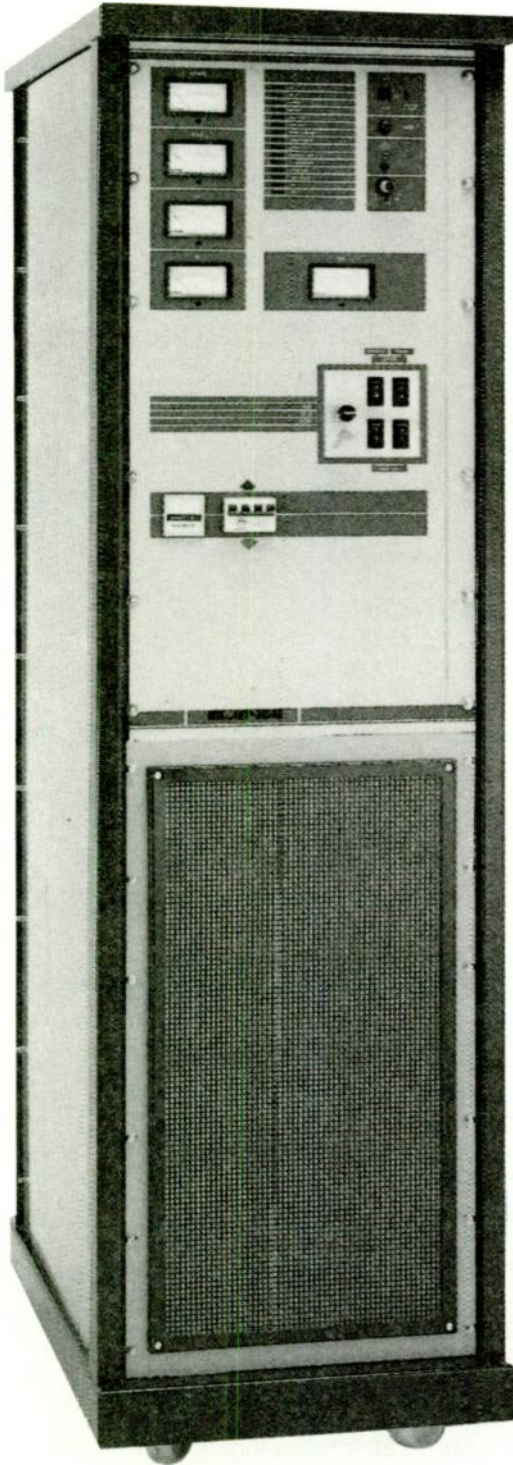

- Compact size, standard 19" rack
- Single tube
- Field proven, stable and reliable grounded grid configuration for long tube life
- No neutralization required
- Conservatively rated parts and components
- Simple and rugged construction
- Easy access to internal parts
- Oversized cooling system
- Modular design for easy maintenance
- Ample metering of all operating parameters
- Compatible with remote control systems
- Protections on all main parameters with automatic restarting
- Dual speed motorized tuning controls
- Temperature protected power transformer with electrostatic shield between the windings
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

Technical Specifications

BEXT

| | T 12000 | T 15000 | T 20000 | T 30000 |
|-------------------------------|---|--------------------|--------------------|---|
| Tube complement | 3CX10000 A7 | 3CX15000 A7 | 3CX15000 A7 | 4CX20000 D |
| RF output connector | 3 1/8" Flange | 3 1/8" Flange | 3 1/8" Flange | 3 1/8" Flange |
| RF input connector | 7/8" Flange | 7/8" Flange | 7/8" Flange | 7/8" Flange |
| RF in/out impedance | 50 Ohms | 50 Ohms | 50 Ohms | 50 Ohms |
| Max ambient temperature | 40° C | 40° C | 40° C | 40° C |
| Max relative humidity | 80% | 80% | 80% | 70% |
| Power consumption | 19.5 KVA | 24.5 KVA | 31 KVA | 49.5 KVA |
| Output power | 12 KW | 15 KW | 20 KW | 30 KW |
| Drive requirement | 250 W | 800 W | 1250 W | 1250 W |
| High output drive requirement | 800 W | 1200 W | 1800 W | 1800 W |
| Gain | 13 dB | 13 dB | 13 dB | 13 dB |
| Efficiency | 60% | 60% | 75% | 72% |
| Max VSWR | 600 W | 600 W | 600 W | 600 W |
| Harmonic suppression | -82 dBc | -82 dBc | -82 dBc | -82 dBc |
| Weight | 500 Kg 1100 Lbs | 560 Kg 1232 Lbs | 630 Kg 1386 Lbs | 500 Kg (X2) 1100 Lbs (X2) |
| AC power requirement | 240 V or 380 V 3 phase 50/60 Hz | | | |
| Frequency range | 87.5 - 108 MHz | | | |
| Dimensions | 19" standard cabinet, 40 rack spaces high. Height: 79" (2000 mm) + 4" (100 mm) for air outlet Width: 22 1/2" (570 mm) Depth: 36 1/4" (920 mm) | | | (2) cabinets @ 32 spaces each; 63" H + 4" for flue X 22 1/2" W X 36 1/4 " D |
| Diameter of air outlet | 7 1/2" (180 mm) | | | |
| Reset procedure: | Automatic (8 resets). Auto lockout after 8 resets/restarts. Displays number of interventions. | | | |
| Metering: | <ul style="list-style-type: none">• Direct power• Reflected power• Anode current• Grid current• Anode voltage• Bias voltage• Filament voltage• Temperature• Hour meter | | | |
| Indicator lights for: | <ul style="list-style-type: none">• Power on• Door open or loose connector• Anode current protection active• Grid control protection active• VSWR protection active• Cavity temperature protection active• Transformer temperature protection active• Filament voltage protection active• Bias voltage protection active• Fan fault protection active• Anode insertion timer status• Anode power-up status• Shutdown after maximum number of fault conditions | | | |


619-239-8462
FAX: 619-239-8474

Features and specifications subject to change without notice.

BEXT

“D” Series

1, 2, 3, 6, 10 and 15 KW FM Amplifiers

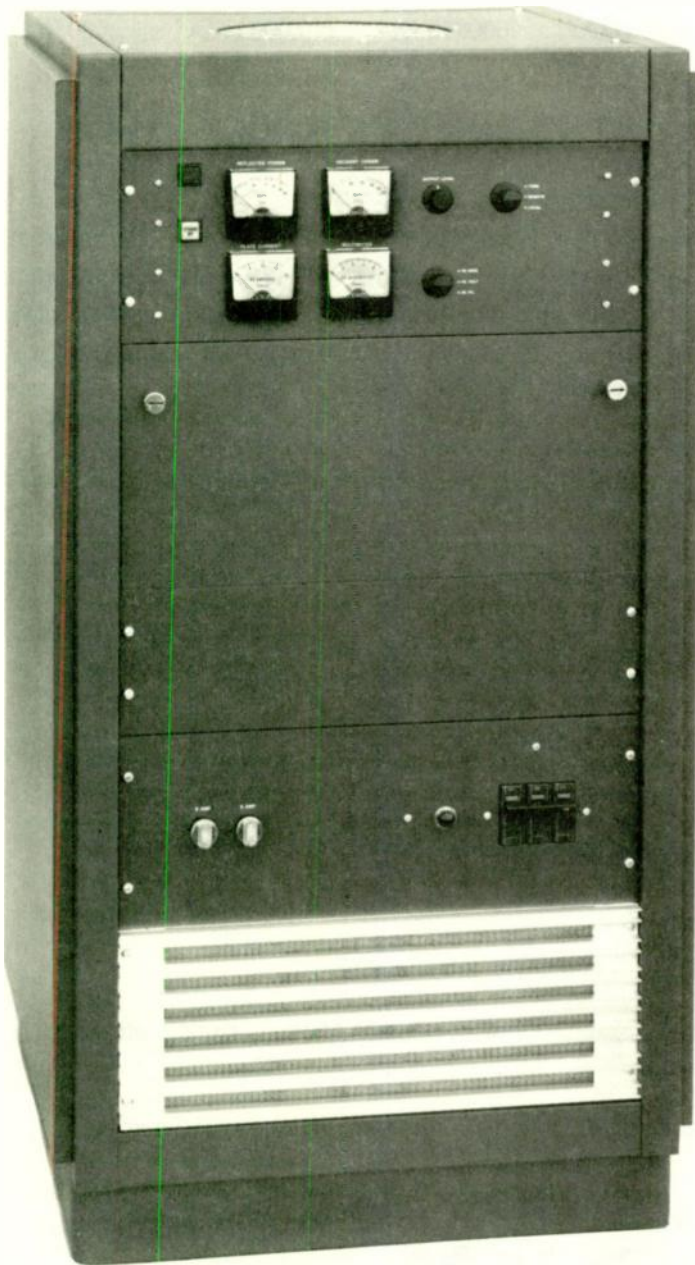

- Compact size, standard 19" rack cabinet
- Field proven, stable and reliable grounded grid configuration for long tube life
- Built-in IPA allows full output power with only 10 W drive
- Automatic output power level control circuit
- Easy access to internal parts
- Ample metering of all operating parameters
- 50 ohm connections allow easy bypass of intermediate stages if necessary
- Compatible with remote control systems
- Protection on all main parameters
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

Technical Specifications



| | D1000 | D2000 | D3000 | D6000 | D10000 | D15000 |
|---------------------------------|---|---|---|---|---|--------------------------------------|
| PA Tube complement | 3CX1200Z7 | 3CX3000A7 | 3CX3000A7 | 3CX6000A7 | 3CX10000A7 | 3CX10000A7 |
| IPA Tube complement | Solid state | Solid state | Solid state | 3CX1200Z7 | 3CX1200Z7 | 3CX1200Z7 |
| RF output connector (Flange) | 7/8" | 7/8" | 1-5/8" | 1-5/8" | 1-5/8" | 3-1/8" |
| Maximum output power | 1500 W | 2500 W | 5000 W | 7500 W | 10,000 W | 15,000 W |
| Approximate power consumption | 2500 W @ 1000 W Out, 3750 W @ 1500 W Out | 5000 W @ 2000 W Out, 6250 W @ 2500 W Out | 7500 W @ 3000 W Out, 12,500 W @ 5000 W Out | 15,000 W @ 6000 W Out, 18,750 W @ 7500 W Out | 25,000 W @ 10,000 W Out | 37,500 W @ 15,000 W Out |
| Weight | 136 Kg 300 lbs. | 205 Kg 450 lbs. | 273 Kg 600 lbs. | 340 Kg 750 lbs. | 455 Kg 1000 lbs. | 545 Kg 1200 lbs. |
| Dimensions: | 19" standard cabinet with available spaces for exciter | | | | | |
| W" | 22" (566mm) | 22" (566mm) | 22" (566mm) | 22" (566mm) | 22" (566mm) | 22" (566mm) |
| D" | 22" (566mm) | 22" (566mm) | 32" (810mm) | 32" (810mm) | 32" (810mm) | 32" (810mm) |
| H" | 45" (1143mm) | 54" (1372mm) | 72" (1829mm) | 72" (1829mm) | 72" (1829mm) | 84" (2134mm) |
| AC power requirement | 208-240 V Single phase 50/60 Hz | 208-240 V Single phase or 208-480 V Three phase 50/60 Hz | 208-240 V Single phase or 208-480 V Three phase 50/60 Hz | 208-240 V Single phase or 208-480 V Three phase 50/60 Hz | 208-240 V Single phase or 208-480 V Three phase 50/60 Hz | 208-480 V Three phase 50/60 Hz |
| Diameter of air outlet | 9" (229mm) | | | | | |
| Approx. drive requirement | 10 W | | | | | |
| RF Input connector | "N" Type | | | | | |
| RF Input/Output impedance | 50 ohm | | | | | |
| Approx. final stage efficiency | 75% | | | | | |
| Approx. cabinet efficiency | 40% | | | | | |
| Max. VSWR at max. nominal power | 2.0 : 1 | | | | | |
| Frequency range | 87.5 - 108 MHz (Specify channel when ordering) | | | | | |
| Ambient temperature range | 0° to 40°C (32° to 104°F) | | | | | |
| Max. altitude | 3,000 MT (10,000 FT) | | | | | |
| Harmonic suppression | Meets or exceeds all FCC and CCIR requirements | | | | | |
| Protection circuits | SWR • Airflow failure • Excessive output power • Anode current overload • Excessive grid current | | | | | |
| Metering | Forward and reflected power • Anode current and voltage • Grid current • Filament voltage | | | | | |
| Remote control functions | High Voltage and Filament On/Off • Forward and reflected power reading • Anode current and voltage reading • Reset | | | | | |
| | All amplifiers have a constant RF output control circuit to keep power at a preset level. | | | | | |
| | All RF connections between internal stages are of 50 ohm impedance and each amplification stage may be bypassed if necessary. | | | | | |


619-239-8462
FAX: 619-239-8474

Features and specifications subject to change without notice.

BEXT

“L” Series

4, 7, 10, 20 and 30 KW FM Amplifiers

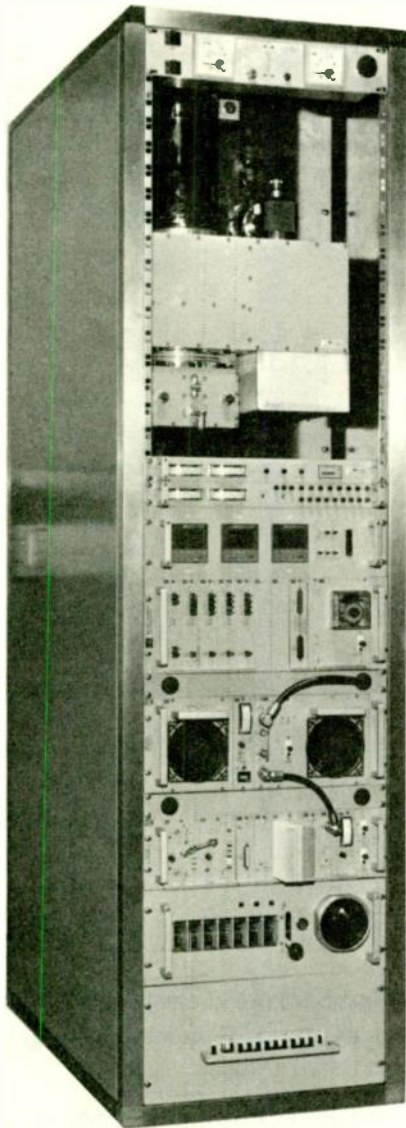

- Compact size, standard 19" rack cabinet
- Single tube
- Field proven, stable and reliable grounded grid configuration for long tube life
- Conservatively rated parts and components
- Simple and rugged construction
- Easy access to internal parts
- Oversized cooling system
- Ample metering of all operating parameters
- Compatible with remote control systems
- Protection on all main parameters
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

Technical Specifications



| | L4 | L7 | L10 | L20 | L30 |
|--|-------------------|-------------------|--------------------|--------------------|--------------------|
| Tube complement | YU148 | YU148 | 4CX20000 C | 4CX20000 C | 4CX20000 C |
| RF output connector, flange | 1 5/8" | 1 5/8" | 3 1/8" | 3 1/8" | 3 1/8" |
| Maximum output power | 4 KW | 7 KW | 10 KW | 20 KW | 30 KW |
| Approx. power consumption at max. output, drivers incl. | 8 KVA | 12 KVA | 18 KVA | 36 KVA | 55 KVA |
| Approx. drive requirement | 200 W | 350 W | 250 W | 500 W | 750 W |
| Diameter of air outlet | 160mm (6 1/4") | 160mm (6 1/4") | 160mm (6 1/4") | 200mm (8") | 200mm (8") |
| Weight | 350 Kg 770 Lbs | 450 Kg 990 Lbs | 500 Kg 1100 Lbs | 550 Kg 1210 Lbs | 650 Kg 1430 Lbs |

Dimensions 19" standard cabinet with available spaces for exciter and IPA
 Width: 22 1/4" (566 mm)
 Depth: 39 1/2" (1000 mm)
 Height: 82" (2083 mm)

AC power requirement 240 V or 380 V 3 phase 50/60 Hz $\pm 2\%$
 (230V single phase on request for L4 only)

RF Input connector "N" type

RF Input/Output impedance 50 ohm

Approx. final stage efficiency 70%

Max. VSWR at max. nominal pwr 1.5:1

Approx. amplifier gain 13 dB (L4,L7); 17 - 18 dB (L10, L20, L30)

Frequency range 87.5 - 108 MHz

Ambient temperature range -10°C to 45°C (15°F to 112°F)

Max. relative humidity 90%

Max. altitude 2,000 MT (6,500 FT); others on request

Acoustic noise factor <65 dBA

Harmonic suppression Meets or exceeds all FCC and CCIR requirements

Protection circuits SWR • Airflow failure • Overload • Temperature of cavity, of H.V. transformer and of blower motor • Erratic filament voltage • Operator errors

Metering Anode current and voltage • Bias voltage • Grid current • Forward and reflected power • Hour meter

Remote control functions On/off • Forward and reflected power reading • Anode current and voltage reading • Reset

619-239-8462
 FAX: 619-239-8474

Features and specifications subject to change without notice.

FM Stereo Generator

- Digital synthesis of pilot(s) and subcarrier(s) gives maximum stereo separation and stable operation with no trimming adjustments or other routine maintenance.
- Internal phase-compensated lowpass input filtering provides complete pilot and SCA protection. A 25 Hz highpass function reduces exciter PLL perturbation.
- Built-in peak overmodulation protection and proprietary filter overshoot control circuits assure full modulation without the need for additional compensation processing.
- Adjustable compensation equalization can correct for STL or other system nonlinearities.
- The 705 can interface with a variety of audio processing systems.
- Setup and maintenance are easy. All components are readily available; no encapsulated or single-source parts are used.

619-239-8462
FAX: 619-239-8474

Technical Specifications

BEXT

705 Stereo Generator

| | |
|---|---|
| Frequency response: | +/- 0.5 dB, 25 Hz - 16 KHz; -20 dB or better at 10 Hz, -60 dB or better at 19 KHz |
| Stereo separation: | Better than 55 dB, 25 Hz - 5 KHz; better than 45 dB, 5 KHz - 16 KHz |
| Noise (below 100% modulation, pilot OFF): | -75 dB or better in baseband and subcarrier; 38 KHz residual and "digital" noise above 54 KHz, -60 dB or better |
| Pilot: | 19 KHz +/- 1 Hz; <2% THD (dist. products better than 55 dB below 100% mod.); injection level adjustable between 6% and 12 % relative to 100% modulation |
| Inputs (Left and Right): | Active-balanced, bridging; accept line input levels between -10 and + 15 dBmV for 100% modulation |
| Input filtering: | 7-pole, phase corrected, active-elliptic, "FNDR" lowpass with defeatable overshoot control circuitry. Third-order Chebyshev highpass section. |
| Pre-emphasis: | Selectable for 75- or 50-microsecond or flat transmission characteristics |
| Output: | Single-ended; selectable 75-ohm or "zero" (voltage source) impedance. Level adjustable between -5 and +12 dBmV (0.5 - 3 V RMS, or 1.2 - 8 V P-P). |
| Overmodulation protection: | Integral part of input filter overshoot control circuitry; defeatable with same |
| Digital synthesis sampling rate: | 608 KHz (16X subcarrier) |
| FMX™ option: | Auxiliary plug-in circuit board with all parameters preset. Easily user-installed (or exchanged with possible updated versions) |
| Power requirements: | 105 - 130 or 205 - 255 VAC, 50/60 Hz; 8W |
| Dimensions: | 1.75" H X 19" W X 7" D |
| Weight: | 3.6 Kg (8 Lbs) |


619-239-8462
FAX: 619-239-8474

Features and specifications subject to change without notice.

BEXT

260

Stereo Broadcast Processor

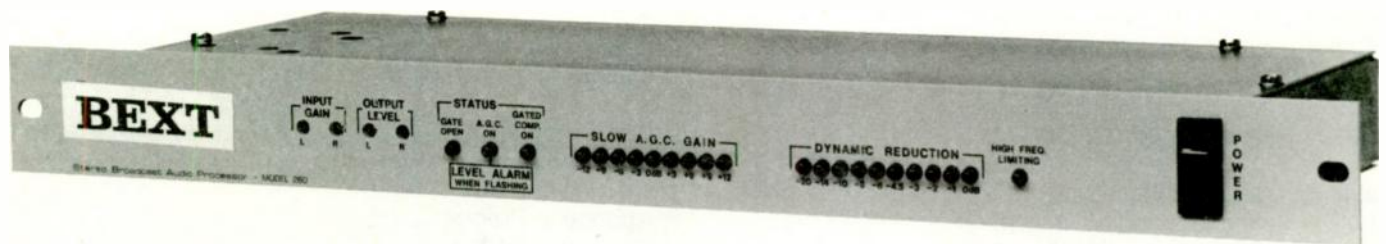

- Gated AGC and compression
- Program-controlled "floating platform" limiter release characteristic
- Unique Level Alarm warns of "dead air" and out-of-limits operation
- Feedforward PWM gain control for smooth, colorless performance
- Easy setup and maintenance - no subjective adjustments or internal calibration required
- Uses off-the-shelf components

619-239-8462
FAX: 619-239-8474

General:

Frequency Response:

± 0.5 dB, 10 Hz - 15 KHz

Noise:

>75 dB below 100% modulation, 10 Hz - 15 KHz

Distortion:

(with full AGC correction and 10 dB Dynamic Reduction) <.0.5%, 20 Hz - 15 KHz, <.0.25%, 50 Hz - 10 KHz

Crosstalk:

Better than 60 dB, 10 Hz - 10 KHz

Inputs (Left and Right):

Active-balanced, bridging, accept nominal line levels between -20 and +10 dBmV

Outputs (Left and Right):

Active-balanced, 600 ohm source impedance, deliver 0 to +15 dBm to 600 ohm loads

Power Requirement:

105 - 130 VAC or 205 - 255 VAC, 50/60 Hz; 20 W

Dimensions:

1 3/4" x 19" x 8" (One rack unit)

Shipping Weight::

12 lbs

Gate Circuit:

Gating inhibits AGC "hunting" and Average Compression release during brief pauses in the input program. Extended program loss slowly returns circuit gains to resting values.

Threshold:

Fixed at -25 dB relative to AGC-corrected program level

Frequency Weighting:

-3 dB at 300 Hz and 3 KHz

Level Alarm:

Front panel indicator flashes when AGC correction

exceeds ±9 dB or when "dead air" (Gate cled) exceeds 10 seconds

AGC:

Slow AGC erases long-term program level variations for more consistent Compression and Limiting action. AGC may be temporarily defeated by grounding a rear-panel terminal.

Correction Range:

±12 dB

Correction Rate:

Approximately 0.5 dB/second

Response to Program Dynamics:

Quasi-peak; 10 ms, UK/EBU PPM integration

Dynamic Reduction:

Compression and Limiting share a common split-spectrum gain control circuit, but are separated by a time domain "floating platform" attack/release characteristic. Compression (only) or total Dynamic Reduction may be independently defeated by grounding rear-panel terminals.

Spectrum Division:

Independent high frequency gain reduction follows 75 μs pre-emphasis characteristic. 25 μs and 50 μs optionally available.

Compressor Attack:

5 msec/dB

Limiter Attack:


<1 μs

Limiter Release:

1 ms/dB to Compressor "platform" value; 10 ms/dB when Compressor is defeated

Ceiling Clipper:

Active only on Limiter overshoots which would exceed 100% modulation. Conforms to pre-emphasis characteristic.

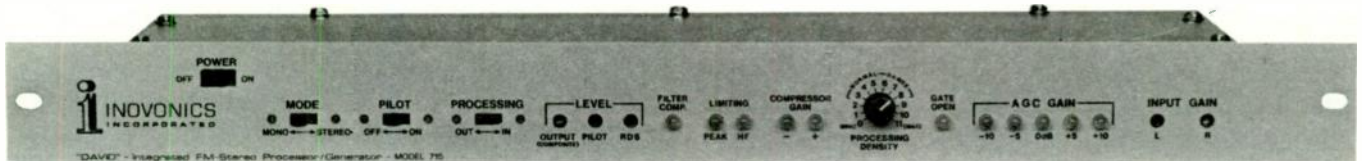Integrated FM-Stereo Processor/Generator

Introducing the 715 – a new integrated Audio Processor / Stereo Generator for all FM-Stereo broadcasting applications.

- Stereo Audio Processing includes Slow-AGC, Dynamic Compression and Peak Limiting. Single-knob control adjusts program density.
- Digital Synthesis of pilot and subcarrier for best separation and freedom from drift and from routine adjustment.
- Built-in Combining for SCA or RDS subcarriers with separate TTL pilot sync output.
- Easy to set up, easy to use. Generic components are used throughout for ease in servicing, anywhere in the world.

The 715's comprehensive Audio Processing section combines the functions of a gated, gain-riding AGC with split-spectrum dynamic compression and peak control. The result is a signal which is both "competitive" and fully protected from overmodulation. A single panel control gives the user a wide latitude of adjustment range over program dynamics, from a natural, unprocessed sound to a very aggressive one.

The Stereo Generator section features digital synthesis of the composite signal with its inherently superior stability and performance. Internal combining for SCA or RDS subcarriers is provided, as is a TTL-level 19 KHz pilot output for subcarrier sync.

The design is unique in its simplicity and utilizes readily available, multiple-source components.

715 Integrated FM-Stereo Processor / Generator

Frequency Response:

±0.5 dB, 20 Hz to 16 KHz; -60 dB or better at 19 KHz

Stereo Separation:

Better than 60 dB, 20 Hz to 16 KHz

Distortion:

<0.15% THD in baseband and subcarrier at 95% modulation

Noise:

(Ref: 100% modulation): -75 dB or better in baseband and subcarrier with pilot OFF; 38 KHz residual and "digital" noise above 54 KHz, -70 dB or better.

Pilot:

19 KHz, ±1 Hz; level adjustable between 6% and 12%, relative to 100% modulation. <1% THD in pilot signal (distortion products better than 60 dB below 100% modulation).

Line Inputs:

LEFT and RIGHT Line Inputs are active-balanced/bridging; accept line input levels between -15 dBu and +15 dBu for 100% modulation. 30 dB range is divided into two 15 dB-range jumpering options.

Test Inputs:

LEFT and RIGHT unbalanced test inputs bypass audio processing and preemphasis circuitry for direct signal feed to Stereo Generator section.

Subcarrier Input:

Single-ended (unbalanced) input accommodates SCA or RDS subcarrier signals at levels between -20 dBu and 0 dBu for nominal 5% to 10% injection.

Primary Low-Pass Filtering:

7-pole, phase-corrected, active-elliptic "FDNR" low-pass with proprietary filter overshoot compensation circuitry.

Preemphasis:

Integral to split-spectrum audio processing circuitry; may be jumpered for 75 μs or 50 μs characteristic.

AGC Amplifier:

Slow (0.5 dB/sec.) correction for long-term input level variations; ±10 dB capture range displayed by LED indicators.

Compressor / Limiter:

Fast-acting peak limiter has "platform" time constant to compress dynamic range with average-value weighting. Independent high-frequency limiter conforms to selected preemphasis characteristic. LED's indicate peak and H.F. limiter action and compressor gain state. DENSITY control alters time constants and platform values.

Signal Clipping:

Program signal clipping is generally relegated to non-repetitive limiter overshoots of 1 ms or less duration. "Safety" clipping of the Composite output signal is performed prior to stereo pilot insertion.

Composite Output:

Single-ended (unbalanced), "zero" (voltage source) impedance. Level adjustable between -5 dBm and +12 dBm (0.5 - 3 V RMS, or 1.2 - 8 V p-p).

19 KHz Sync Output:

TTL-level symmetrical squarewave, in-phase with 19 KHz Stereo Pilot.

Digital Synthesis Sampling Rate:

680 KHz (16X subcarrier oversampling).

Power Requirement:

105 - 130 VAC or 210 - 255 VAC, 50/60 Hz; 15 watts.


Size and Weight:

1.75" H x 19" W x 7" D (1U); 7 lbs. (shipping).

BEXT

PS 1

Pilot Synchronizer

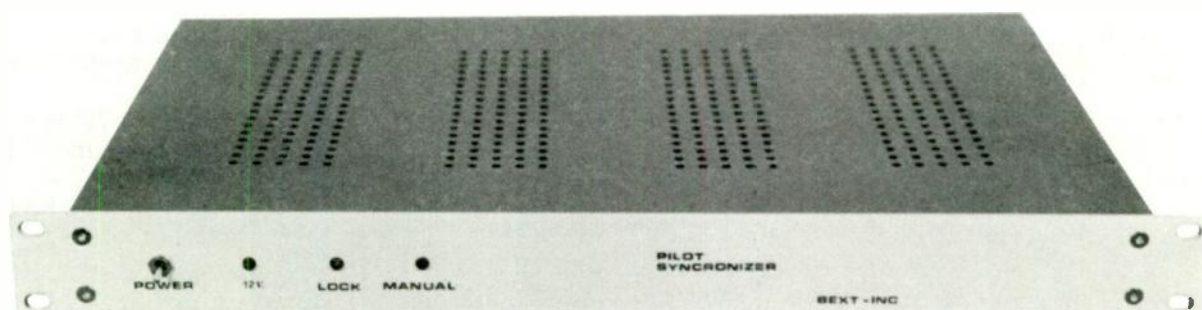

The purpose of the Pilot Synchronizer is to phase lock one or more FM excitors to a common reference using the 19 KHz pilot tone on a multiplex FM signal.

The composite signal from an FM receiver or STL link is fed to the input of the synchronizer. The internal circuitry extracts the 19 KHz pilot tone and uses this tone to phase lock an internal voltage controlled crystal oscillator (VXVO). The output of the unit may be either a 1 KHz square wave or a 10 KHz square wave which is used as a reference frequency for the exciter.

The required stability of the pilot tone is ± 4.5 ppm to maintain the FM exciter to within ± 0.5 KHz stability in the 87.5 to 108 MHz band.

Should the incoming signal fail, the internal circuitry will switch to an internal reference and will maintain the exciter frequency. When the composite signal returns, the unit will automatically switch to the phase lock condition. BEXT excitors are provided with the capability to shut down at loss of signal if so desired.



619-239-8462
FAX: 619-239-8474

Technical Specifications



PS 1 Pilot Synchronizer

| | |
|------------------------------|--|
| Input composite range: | -6 to 10 dBm |
| Input composite impedance: | 50 - 600 - 10K Ohm (internally selectable) |
| Output levels 1 - 10 KHz: | TTL, 50% duty cycle |
| Input and output connectors: | BNC |
| Power requirements: | 117 or 230 V 50/60 Hz, 10 VA max |
| Ambient temperature range: | 0° to 40° C (operational to -10° and 50° C) |
| Max humidity: | 90% |
| Frequency stability: | same as pilot tone if locked; better than +/- 4.5 ppm, 0° to 40° C if unlocked |
| Cabinet size: | 19" W X 1.75" H X 11.25" D (483 mm X 445 mm X 286 mm) |
| Weight: | 3 Kg (6.6 Lbs) |

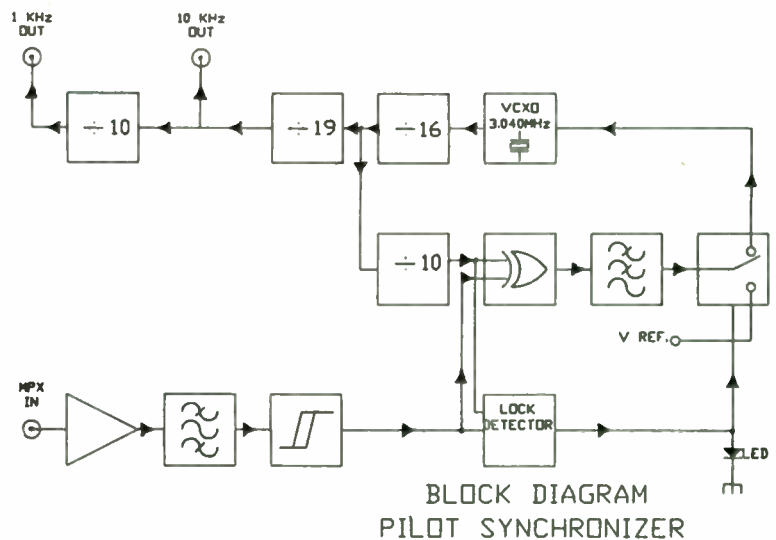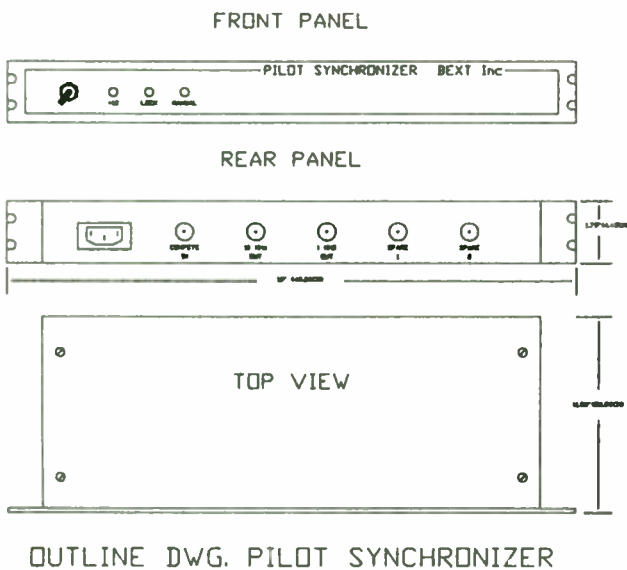


619-239-8462
FAX: 619-239-8474

Features and specifications subject to change without notice.

BEXT

LC STL

Composite Aural STL System

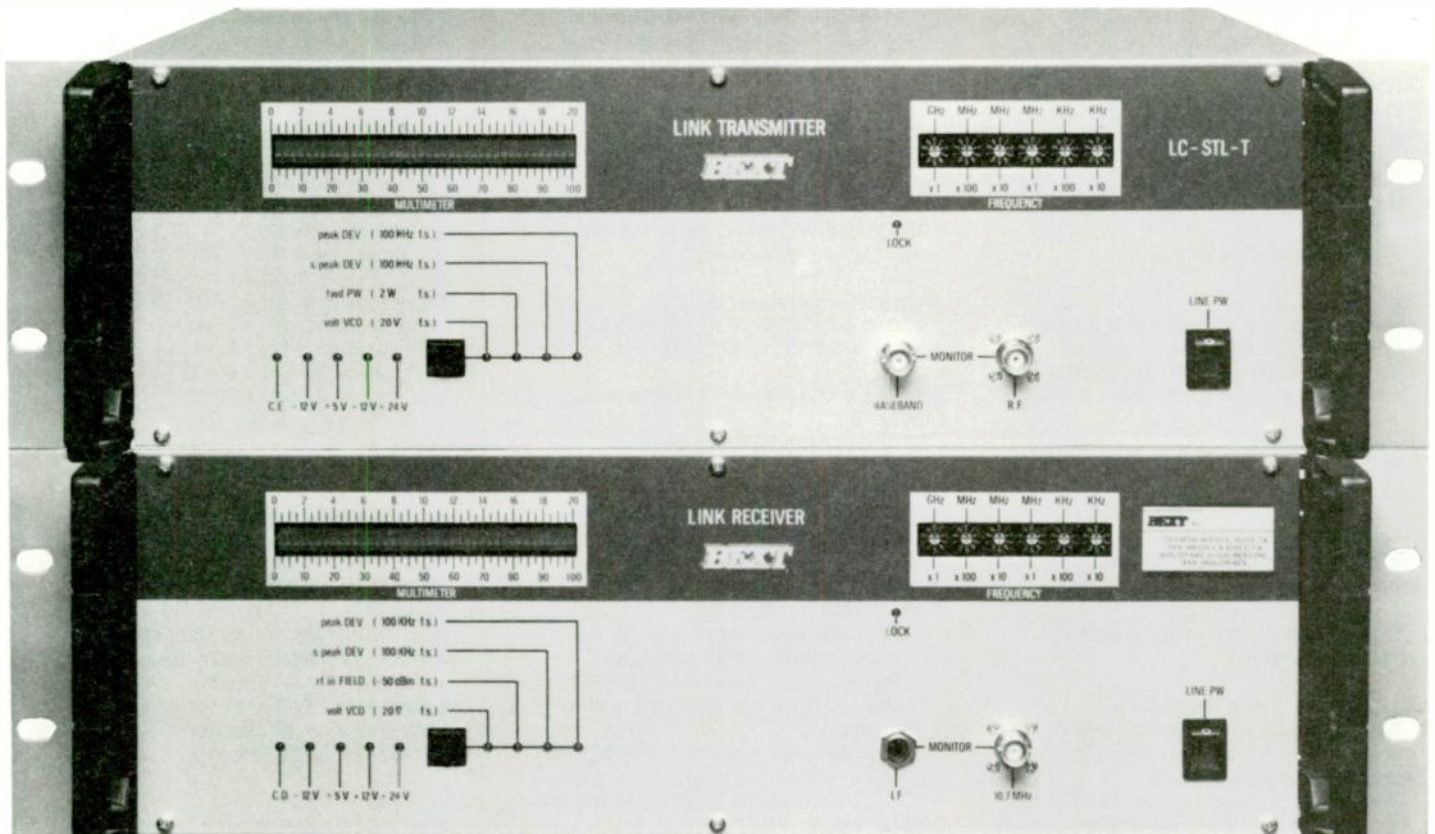

- Available with 1.5 W or 6 W output power
- Front panel frequency programmability
- 75 dB or better S/N
- Superior MPX and SCA performance
- Excellent RF immunity receiver, designed to withstand the most hostile RF environments
- Excellent adjacent channel rejection
- 50 dB minimum stereo separation
- 12 VDC input for direct hook-up to back-up battery
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

Technical Specifications

LC STL Composite Aural STL

BEXT

LC STL System Specifications

Frequency Range:
930 to 960 MHz

Frequency Response:
+/- 0.3 dB or better, 30 Hz to 53 KHz
+/- 0.5 dB or better, 53 KHz to 75 KHz

Distortion, THD:
Stereo demodulated, decoded and de-emphasized:
30 Hz to 15 KHz:
<0.1% (typ 0.05% @ 1 KHz)
Mono demodulated and de-emphasized:
30 Hz to 7.5 KHz:
<0.1% (typ 0.02% @ 1 KHz)

Distortion, IMD:
Intermodulation at demodulated output, two tone with 1 KHz difference frequency:
5 - 15 KHz, D2 < 0.05% D3 < 0.1%
15 - 53 KHz, D2 < 0.12% D3 < 0.3%

Stereo Separation:
50 dB or better, 30 Hz to 15 KHz (typically
55 dB or better)

Crosstalk:
50 dB or better, stereophonic subchannel to main channel

50 dB or better, main channel to stereophonic subchannel

Signal to Noise Ratio (mono):
80 dB or better, typically 82 dB with 75 KHz deviation and 400 Hz frequency modulation

Signal to Noise Ratio (stereo):
75 dB or better, typically 80 dB with 75 KHz deviation, demodulated, de-emphasized left or right

LCT STL - TX Specifications

Power Output:
0.15 W to 1.5 W continuously variable, or
0.60 W to 6.0 W continuously variable

Frequency of Operation:
Synthesized, with temperature compensated crystal reference

RF Output Connector/Impedance:
Type "N" female/50 Ohm

Frequency Stability:
Better than 5 ppm (+/- 5 KHz), 0° C to 40° C (+32° F to +104° F)

Frequency Range:
930 - 960 MHz directly digitally programmable in 80 KHz increments, with fine frequency adjustment

Modulation Type:
Direct FM at the carrier frequency

Asynchronous AM S/N ratio:
80 dB below reference carrier with 100% AM modulation, 75 microsec de-emphasis (no FM modulation present)

Synchronous AM S/N Ratio:
80 dB below reference carrier with 100% AM modulation (FM modulation +/-75 KHz)

Multimeter:
Four function diagnostic aid, peak and semi-peak modulation meter and linear scale power display

DC Input Power:
12.5 V (+/-0.1 V) 2 A (3.5 A for 6 W models), 10 mV P-P max ripple

AC Input Power:
120 or 240 VAC 50/60 Hz 30 VA max (50 VA max for 6 W models)

Ambient Temperature Range:
0° C to 40° C (+32° F to +104° F) [operational to -20° C to +50° C (-4° F to +122° F)]

Spurious and Harmonic or Subharmonic Emission:
60 dBc or more below carrier level

Modulation Capability:
One stereo MPX program (balanced or unbalanced input) and subcarrier channels (up to 100 KHz baseband)

Audio Inputs:
1 baseband input, + and - polarity, balanced and unbalanced, 4 BNC connectors
All levels are factory set for 0 dBm (775 mV RMS/2.2 V P-P), adjustable in the -1 to +7 dBm range
Input impedance is switchable 600 Ohm/10k Ohm pre-emphasis (75 microsec for FCC, 50 microsec for CCIR) is switchable for flat inputs

Composite FM S/N Ratio:
75 dB below 75 KHz deviation (85 dB typical) measured in a 30 Hz to 20 KHz bandwidth

Composite Harmonic Distortion:
0.05% or less (.02% typical)

Stereo Separation:
Greater than 65 dB, 100 Hz to 15 KHz
Greater than 60 dB, 30 Hz to 15 KHz

Composite Amplitude Response:
+/- 0.1 dB or less, 30 Hz - 200 KHz

Composite Phase Response:
+/- 0.5 degrees from linear phase, 30 Hz - 53 KHz

Front Panel Size:
483 mm (19") W x 132 mm (5 1/4") H (3 standard rack spaces high)

Overall Depth: 483 mm (19")
Net Weight: 10 Kg (22 Lbs), 1.5 W model
12 Kg (26.4 Lbs), 6 W model
Finish: Anodized aluminum

LCR STL - Receiver Specifications

RF Input Connector/Impedance:
Type "N" female/50 Ohm

Frequency Range:
930 - 960 MHz directly digitally programmable in 80 KHz increments, with fine frequency adjustment

Sensitivity:
Monaural (demodulated, de-emphasized):
5 microV for S/N > 50 dB
15 microV for S/N > 60 dB
50 microV for S/N > 65 dB
150 microV for S/N > 70 dB
1.5 milliV for S/N > 80 dB
for 60 dB S/N, 10 microV typ required
Composite (left or right channel, demodulated, decoded, de-emphasized):
5 microV for S/N > 30 dB
15 microV for S/N > 40 dB
50 microV for S/N > 55 dB
150 microV for S/N > 60 dB
1.5 milliV for S/N > 75 dB
for 60 dB S/N, 100 microV typ required

Selectivity (static):
3 dB IF bandwidth +/- 150 KHz
60 dB IF bandwidth +/- 500 KHz
80 dB IF bandwidth +/- 600 KHz

Selectivity (dynamics): adjacent-channel selectivity, ratio of interfering to desired signal
+/- 300 KHz 12 dB or better
+/- 400 KHz 28 dB or better
+/- 500 KHz 45 dB or better
+/- 600 KHz 50 dB or better

Multimeter:
4 function diagnostic aid, peak and semi-peak modulation meter

Outputs:
4 BNC's with + and - polarity available, balanced and unbalanced and a 6.3 mm jack female for headphones
IF 10.7 MHz: BNC connector
Carrier Detector: BNC connector
All levels are factory set for 0 dBm (775 mV RMS/2.2 V P-P), adjustable in the -1 TO +7 dBm range

Ambient Temperature Range:
0° C to 40° C (+32° F TO +104° F) [operational to -20° C to +50° C (-4° F to +122° F)]

AC Input Power:
120 or 240 VAC, 50/60 Hz 30 VA

DC Input Power:
12.5 V (+/- 0.1 V) 2 A, 10 mV P-P max ripple

Front Panel Size:
483 mm (19") W x 132 mm (5 1/4") H (3 standard rack spaces high)

Overall Depth: 483 mm (19")
Net Weight: 12 Kg (26.4 Lbs)
Finish: Anodized aluminum


619-239-8462
FAX: 619-239-8474

Features and specifications subject to change without notice.

HEXT

SD STL

Composite Aural STL System

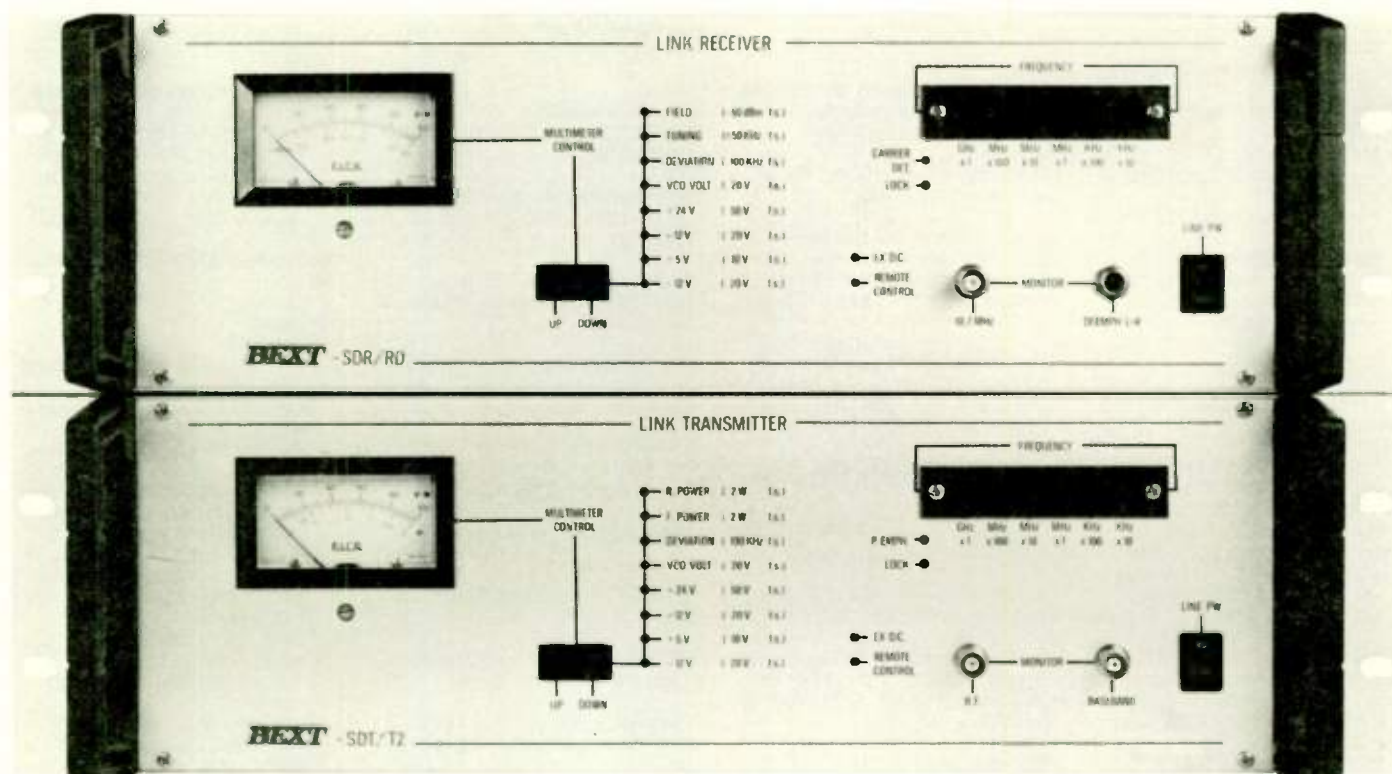

- Front panel frequency programmability
- 80 dB or better S/N
- Superior MPX and SCA performance
- Capable of 100 - 200 KHz telemetry/data subcarriers on separate port in addition to 0-100 KHz port for main program and standard SCA's
- Excellent RF immunity receiver, designed to withstand the most hostile RF environments
- Excellent adjacent channel rejection
- 50 dB minimum stereo separation in the worst possible condition of selectivity (narrow band)
- 12 VDC input for direct hook-up to back-up battery

619-239-8462
FAX: 619-239-8474

SD STL - Composite Aural STL

SD STL System Specifications

Frequency Range: 930 to 960 MHz

Frequency Response:

Wide Selectivity

+/- 0.1 dB or better, 30 Hz to 53 KHz
+/- 0.3 dB or better, 53 KHz to 75 KHz

Mid Selectivity

+/- 0.3 dB or better, 30 Hz to 53 KHz
+/- 0.5 dB or better, 53 KHz to 75 KHz

Narrow Selectivity

+/- 0.5 dB or better, 30 Hz to 53 KHz
+/- 1 dB or better, 53 KHz to 75 KHz

Distortion, THD:

Stereo demodulated, decoded and de-emphasized 30 Hz to 15 KHz:

<0.1% (typ 0.05%) on wide
<0.15% (typ 0.1%) on mid
<0.18% (typ 0.15%) on narrow
Mono demodulated and de-emphasized 30 Hz to 7.5 KHz:
<0.08% (typ 0.02%) on wide
<0.1% (typ 0.06%) on mid
<0.15% (typ 0.08%) on narrow

Distortion, IMD: Intermodulation at demodulated output, two tone with 1 KHz difference frequency:

5 - 15 KHz, D2 < 0.05% D3 < 0.1%
15 - 53 KHz, D2 < 0.12% D3 < 0.3%

Stereo Separation: 50 dB or better, 30 Hz to 15 KHz (typically 55 dB or better) in all selectivity positions, 60 dB average in "wide" selectivity position

Crosstalk: 50 dB or better, stereophonic subchannel to main channel
50 dB or better, main channel to stereophonic subchannel

Signal to Noise Ratio (mono): 80 dB or better, typically 85 dB with 75 KHz deviation and 400 Hz frequency modulation

Signal to Noise Ratio (stereo): 80 dB or better, typically 82 dB with 75 KHz deviation, demodulated, de-emphasized left or right

SDT STL - TX Specifications

Power Output: 0.15 W to 1.5 W continuously variable

Frequency of Operation: Synthesized, with temperature compensated crystal reference

RF Output Connector/Impedance: Type "N" female/50 Ohm

Frequency Stability: Better than 5 ppm (+/- 5 KHz), 0° C to 40° C (+32° F to +104° F)

Frequency Range: 930 - 960 MHz directly digitally programmable in 80 KHz increments, with fine frequency adjustment

Modulation Type: Direct FM at the carrier frequency

Asynchronous AM S/N Ratio: 80 dB below reference carrier with 100% AM modulation, 75 microsec de-emphasis (no FM modulation present)

Synchronous AM S/N Ratio: 80 dB below reference carrier with 100% AM modulation (FM modulation +/-75 KHz)

Multimeter: Eight function diagnostic aid

DC Input Power: 12.5 V (+/-0.1 V) 2 A, 10 mV P-P max ripple

AC Input Power: 100, 120, 220, 240 VAC 50/60 Hz, 30 VA max

Ambient Temperature Range: 0° C to 40° C (+32° F to +104° F) [operational to -20° C TO +50° C (-4° F to +122° F)]

Spurious and Harmonic or Subharmonic Emission: 60 dBc or more below carrier level

Modulation capability: One stereo MPX program (balanced or unbalanced input) and all subcarrier channels

Audio Inputs:

Monaural:
30 Hz - 15 KHz, one unbalanced BNC connector
Composite (Stereo Program and Standard SCA's):

30 Hz - 100 KHz or 0 - 100 KHz (switchable), 2 unbalanced BNC connectors (1 with + phase polarity and 1 with - phase polarity) and 1 cannon balanced connector

Data/Telemetry Subcarriers: 100 KHz - 200 KHz, 2 unbalanced BNC connectors

All levels are factory set for 0 dBm (775 mV RMS/2.2 V P-P), adjustable in the -1 to +7 dBm range

Input impedance is switchable: 600 Ohm/10k Ohm pre-emphasis (75 microsec for FCC, 50 microsec for CCIR) is switchable for flat inputs

Composite FM S/N Ratio: 80 dB below 75 KHz deviation (85 dB typical) measured in a 30 Hz to 20 KHz bandwidth

Composite Harmonic Distortion: 0.05% or less (0.02% typical)

Stereo Separation: Greater than 65 dB, 100 Hz to 15 KHz; greater than 60 dB, 30 Hz to 15 KHz

Composite Amplitude Response: +/- 0.1 dB or less, 30 Hz - 200 KHz

Composite Phase Response: +/- 0.5 degrees from linear phase, 30 Hz - 53 KHz

Front Panel Size: 483 mm (19") W x 132 mm (5 1/4") H (3 standard rack spaces high)

Overall Depth: 483 mm (19")

Net Weight: 10 Kg (22 Lbs)

Finish: Anodized aluminum

SDR STL - Receiver Specifications

RF Input Connector/Impedance: Type "N" female/50 Ohm

Frequency Range: 930 - 960 MHz directly digitally programmable in 80 KHz increments, with fine frequency adjustment

Sensitivity:

Composite:
5 microV for S/N > 30 dB
15 microV for S/N > 40 dB
50 microV for S/N > 55 dB
150 microV for S/N > 60 dB
1.5 milliv for S/N > 75 dB
for 60 dB S/N, 100 microV typ required

Monaural:
5 microV for S/N > 50 dB
15 microV for S/N > 60 dB
50 microV for S/N > 65 dB
150 microV for S/N > 70 dB
1.5 milliv for S/N > 80
for 60 dB S/N, 10 microV typ required

Selectivity (static):

Narrow Position:
3 dB IF bandwidth +/- 120 KHz
60 dB IF bandwidth +/- 350 KHz
80 dB IF bandwidth +/- 450 KHz

Mid Position:
3 dB IF bandwidth +/- 150 KHz
60 dB IF bandwidth +/- 500 KHz
80 dB IF bandwidth +/- 600 KHz

Wide Position:

3 dB IF bandwidth +/- 200 KHz
60 dB IF bandwidth +/- 800 KHz
80 dB IF bandwidth +/- 1000 KHz

Selectivity (dynamics): adjacent-channel selectivity, ratio of interfering to desired signal

+/- 300 KHz 25 dB or better
+/- 400 KHz 45 dB or better
+/- 500 KHz 50 dB or better
+/- 600 KHz 55 dB or better

Multimeter: 8 function diagnostic aid

Outputs:

Monaural:
30 Hz - 15 KHz, 1 unbalanced BNC connector

Composite (stereo program and standard SCA's):

0 - 100 KHz, 2 unbalanced BNC connectors (one with + phase polarity and one with - phase polarity) and 1 Cannon balanced connector

Data/Telemetry Subcarriers: 100 KHz - 200 KHz, 2 unbalanced BNC connectors

IF 10.7 MHz:

BNC connector
Carrier Detector:
Pin 8 of 16 pin Cannon connector

Separate L/R Channels: (decoded, de-emphasized stereo program), 2 unbalanced BNC connectors, (1 for left channel and 1 for right channel) and 1 Cannon balanced connector with separate left and right channels (the polarity of these decoded outputs is internally switchable) and one 6.3 mm jack female for headphones

All levels are factory set for 0 dBm (775 mV RMS/2.2 V P-P), adjustable in the -1 to +7 dBm range

Ambient temperature range: 0° C TO 40° C (+32° F TO +104° F) [operational TO -20° C TO +50° C (-4° F TO +122° F)]

AC input power: 100, 120, 220, 240 VAC 50/60 Hz 30 VA

DC input power: 12.5 V (+/- 0.1 V) 2 A, 10 mV P-P max ripple

Front panel size: 483 mm (19") W x 132 mm (5 1/4") H (3 Standard rack spaces high)

Overall depth: 483 mm (19")


Net weight: 12 Kg (26.4 Lbs)

Finish: Anodized Aluminum

BEXT

STL 15

15 W Amplifier

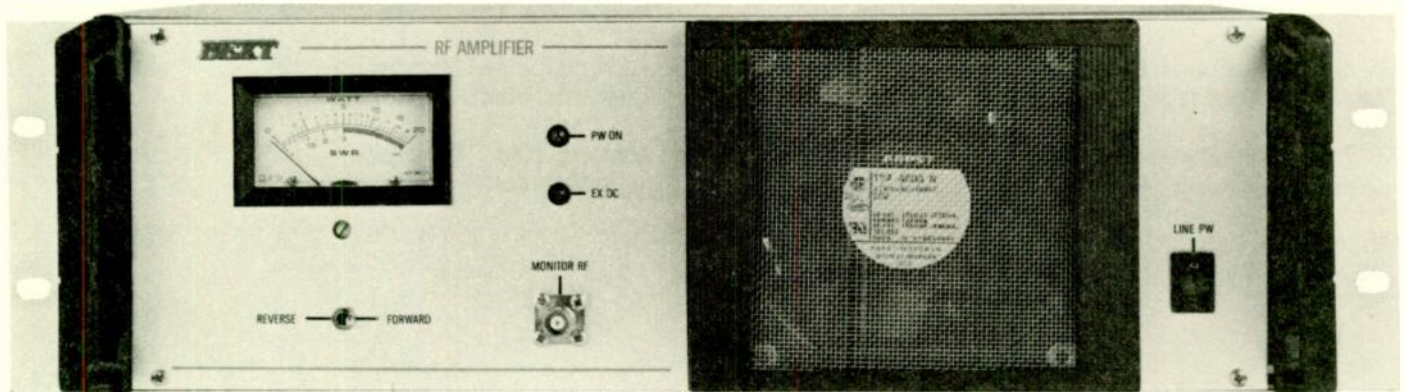

- High output power for long or difficult STL paths
- Total insensitivity to antenna problems through built-in circulator system
- 12 VDC input for direct hook-up to back-up battery
- Compact size
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

Technical Specifications



STL 15 Amplifier

Rated Output Power:
> 15 W (typical 18)

Overall Depth:
483 mm (19")

RF Drive Requirement:
300 mW (+/- 50 mW)

Weight:
13 Kg (28 1/2 Lbs)

RF Output Connector/Impedance:
"N" type / 50 Ohm

Ambient Temperature Range:
0° C to 40° C (32° F to 104° F)

Frequency Range:
880 MHz to 960 MHz

RF Protection:
Total with built in circulator and dummy load

Spurious & Harmonic Suppression:
Meets or exceeds all FCC and CCIR requirements


Asynchronous AM Modulation:
Better than 80 dB

AC Power Requirements:
100, 120, 220, 240 VAC, 120 VA or 12.5 V DC, 6.5 A

Synchronous AM Modulation:
Not measurable

Panel Size:
483 mm (19") W x 132 mm (5 1/4") H (3 standard rack spaces high)

Finish:
Anodized Aluminum

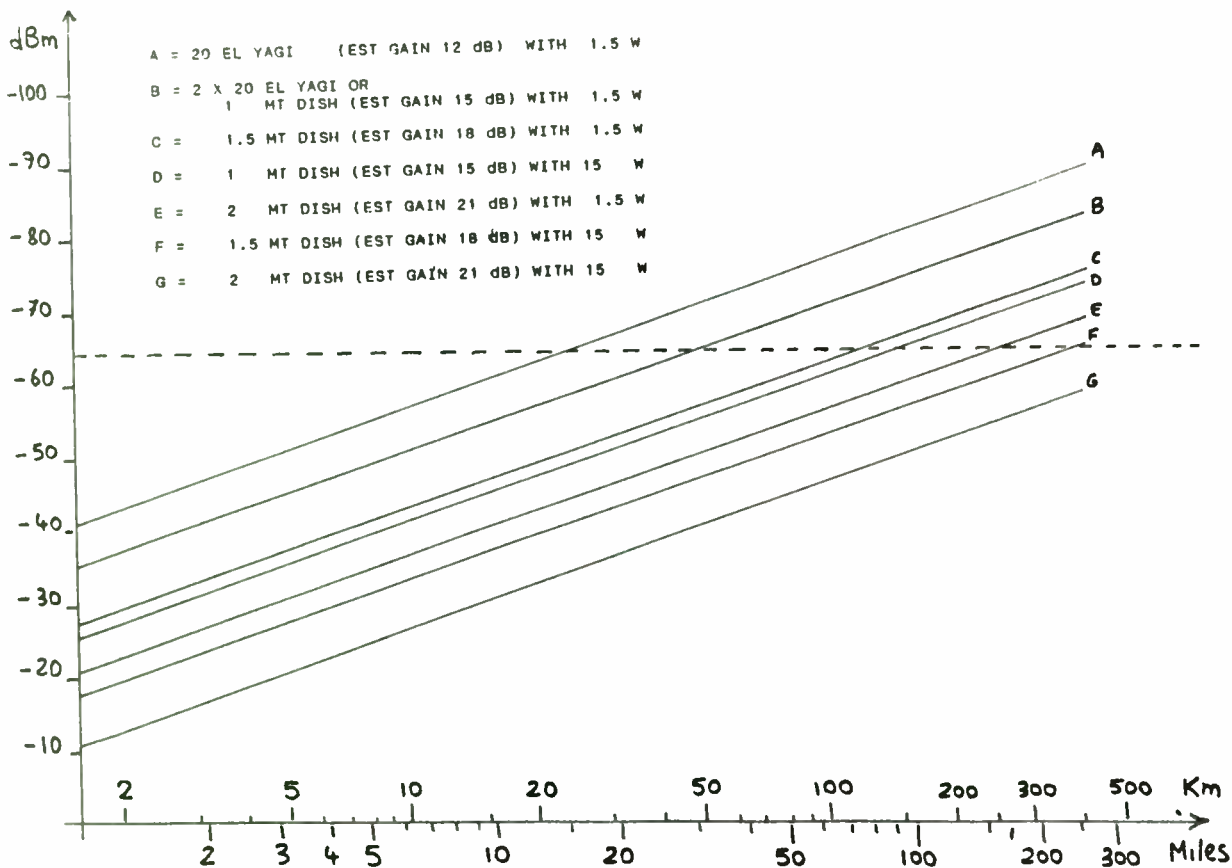


619-239-8462
FAX: 619-239-8474

Features and specifications subject to change without notice.

BEXT

2 - 100 W UHF TV

2/5/10 W UHF TV Exciters/Transmitters
and 25/50/100 W UHF TV Amplifiers

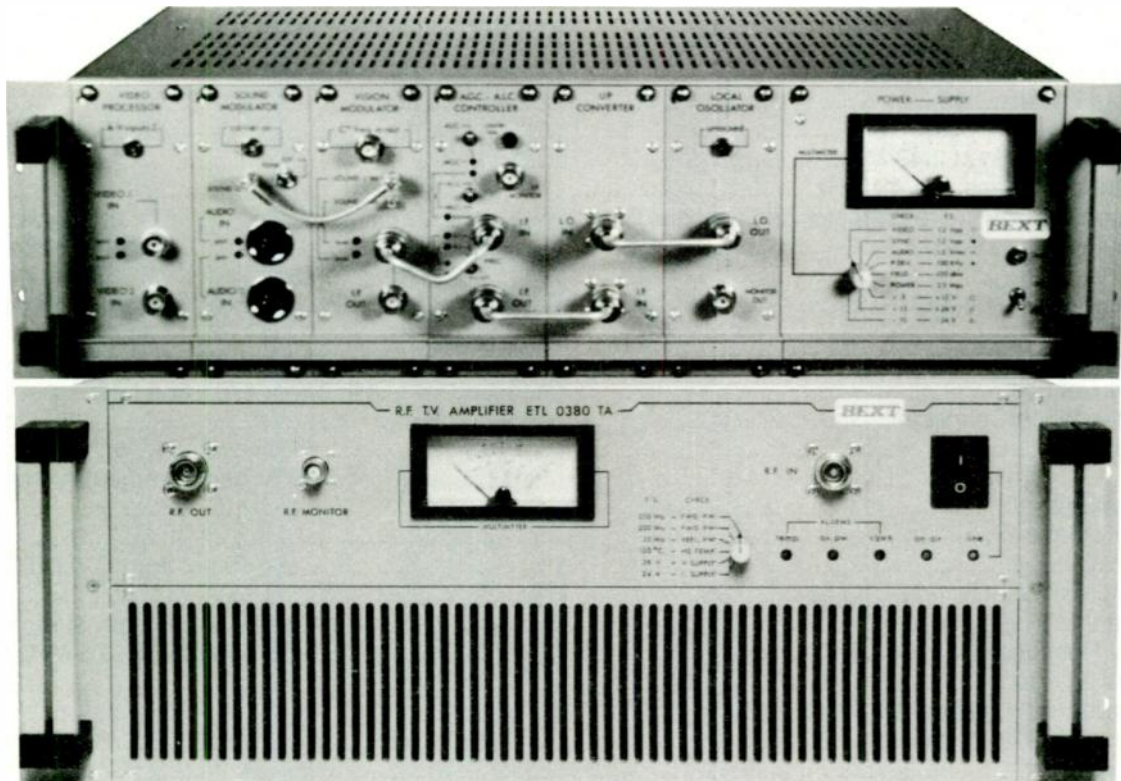

- Two baseband inputs with automatic switching
- Exciters/transmitters also available as translators with VHF or UHF input
- Group delay pre-correction
- Available for offset configuration
- Hum rejection input
- Stereo/dual sound compatible
- Meets or exceeds all FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

2 - 100 W UHF TV Exciters/Transmitters and Amplifiers


| | |
|--|---|
| Video Input Impedance: | 75 Ohm |
| Video Input Level: | 1 VP-P +/- 3 dB |
| Video Common Mode Rejection: | 40 dB typ, on main baseband input |
| Video Main to Secondary Input Separation: | > 56 dB, within 5 MHz |
| Audio Input Impedance: | 5K Ohm, balanced |
| Audio Input Level: | -12 dBm to +6 dBm |
| Audio Main to Secondary Input Separation: | > 70 dB |
| Video IF Output Level: | -7 dBm |
| Video IF Frequency Response: | +/- 0.25 dB, 25 Hz to 4.8 MHz |
| Video IF Differential Gain at 4.43 MHz: | < 2% |
| Video IF Differential Phase at 4.43 MHz: | < 2° |
| Video IF Group Delay (with pre-corrector and vestigial filter on): | < 40 ns within 4.8 MHz |
| Video IF Signal to Noise Ratio: | 65 dB or better, weighted |
| Video IF White Limiter: | 95% for F < 1 MHz |
| Audio IF Frequency Response: | +/- 0.5 dB, 30 - 15 KHz with pre-emphasis and de-emphasis |
| Audio IF Distortion: | < 0.4 % |
| Audio IF Signal to Noise Ratio: | 65 dB or better, non weighted |
| RF Frequency Range: | UHF band, 470 - 860 MHz (specify channel) |
| RF Output Impedance/Connector: | 50 Ohm/"N" type |
| RF Intermodulation: | -64 dB or better, with AM pre-corrector -54 dB or better, without AM pre-corrector |
| RF Differential Gain: | < 3% |
| RF Differential Phase: | < 3° |
| RF Group Delay: | < 50 ns, from F -0.6 TO F +5 MHz |
| RF Sync Compression: | < 3% |
| RF Video Signal to Noise Ratio: | -56 dB or better, 50 KHz dev intercarrier meas. |
| RF Frequency Response: | +/- 0.25 dB or better, F -0.5 MHz to +5 MHz |
| RF Output Power: | 2, 5 or 10 W |
| RF Output Power with Optional Model TB 360, TA 370 and TC 370 Amplifiers: | 25, 50 or 100 W |
| AC Line Requirement: | 220 V AC 60 Hz |
| Front Panel Size, 2, 5, or 10 W Exciters/Transmitters: | 483 mm (19") W x 132 mm (5 1/4") H (3 standard rack spaces high) |
| Front Panel Size, 25, 50, or 100 W Amplifiers: | 483 mm (19") W x 132 mm (5 1/4") H (3 standard rack spaces high) |

The 2/5/10 W Drivers are also available as translators with VHF or UHF input.

BEXT

NS 100

UHF TV Amplifier

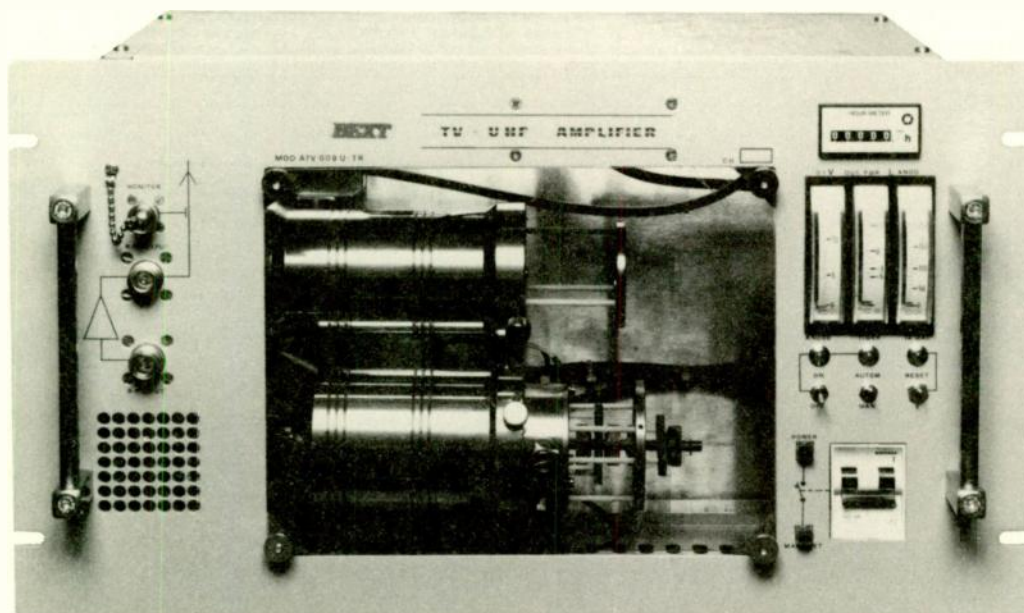

- Compact size, fits into standard 19" rack cabinets
- Single tube
- Field proven, stable and reliable configuration for long tube life
- Plate voltage and all other voltages regulated through unique ferro-resonance power supply design
- Constant output power even within +/- 20% AC line fluctuations
- Stainless steel cabinet and copper + silver + rhodium plated cavity for maximized consistency in performance
- Protections on all main parameters with automatic restarting
- Modular design for easy access
- Compatible with remote control systems
- Meets or exceeds FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474




NS 100 UHF TV Amplifier

Table of technical specifications for the NS 100 UHF TV Amplifier, including Output Power (100 W Peak Visual), Drive Requirement (2.5 W Peak Visual), Tube Complement (Siemens YD1381), Frequency Range (470 - 860 MHz), Approx Gain (16 dB), Output Connector (N type/50 Ohm), Input Connector (N type/50 Ohm), Input VSWR (1.2 or better), Input Matching (Isolator/load in line), Bandwidth (8.5 MHz at +/- 0.5 dB), Intermodulation (-52 dB or better), Harmonic Suppression (60 dB or better), Spurious Suppression (60 dB or better), Plate Voltage (1500 V), Plate Current (130 mA), Max Plate Dissipation (250 W), Bias Voltage (-12 TO -16 Vdc), Filament Voltage (6 Vac +/- 2%), Filament Current (1.3 A), AC Line Requirement (220 Vac single phase +/- 20%), AC Line and Ground Connection (Hard wired), Typical Power Consumption (550 VA), Power Factor (0.9 or better), Protection Circuits (Plate overload, main AC line, filament, control system), Remote On Off (6 - 7 NC contacts), Remote Plate Voltage (14 - 29 NC contacts), Ambient Temperature (+5 C to +45 C), Relative Humidity (< 90%), Max Altitude (2000 m), Front Panel Size (483 mm W x 266 mm H), Overall Depth (420 mm), and Weight (40 Kg).

BEXT

NS 1000S

UHF TV Amplifier

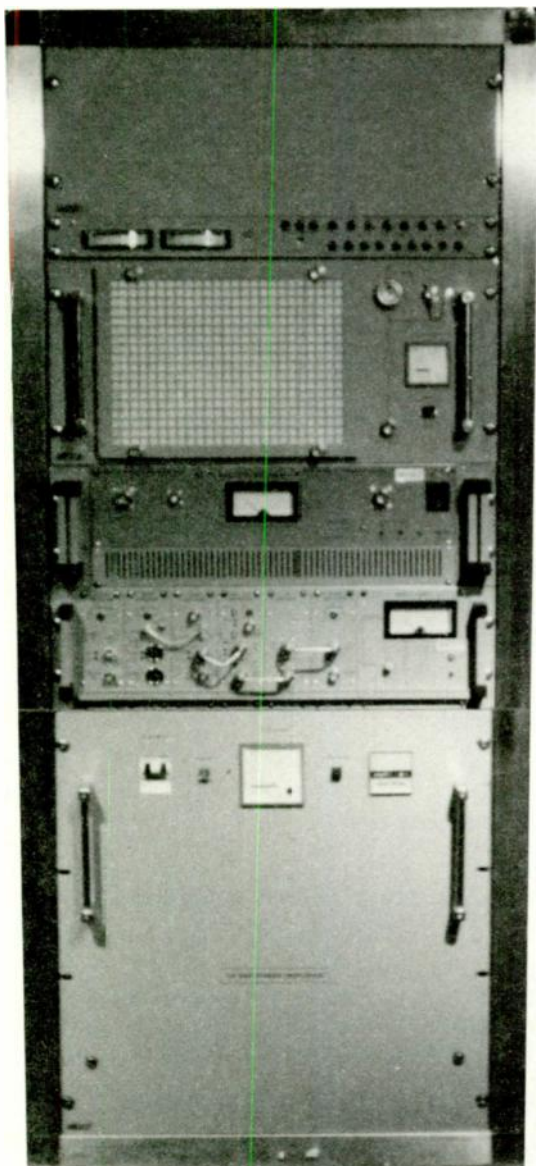

- Compact size, fits into standard 19" rack cabinets
- Single tube
- Field proven, stable and reliable configuration for long tube life
- Plate voltage and all other voltages regulated through unique ferro-resonance power supply design
- Constant output power even within +/-15% AC line fluctuations
- Stainless steel cabinet and copper+silver+rhodium plated cavity for maximized consistency in performance
- Protections on all main parameters with automatic restarting
- Modular design for easy access
- Compatible with remote control systems
- Meets or exceeds FCC and CCIR requirements

619-239-8462
FAX: 619-239-8474

Technical Specifications

BEXT

NS 1000S UHF TV Amplifier

Output Power (V/A):
1000 W (Peak Visual)/100 W

Drive Requirement for 1000 W Output (V/A):
25 W (Peak Visual)/2.5 W

Tube Complement:
Siemens YL1057

Frequency Range:
470 - 860 MHz

Approx Gain:
16.5 dB

Output Connector/Imped:
7/8" flange/50 Ohm

Input Connector/Imped:
"N" type/50 Ohm

Input VSWR:
1.2 or better

Input Matching:
Isolator/load in line

Bandwidth:
8.5 MHz at +/- 0.5 dB

Intermodulation:
-53 dB or better, measured with three tones: Fv - 8 dB,
FS - 10 dB, Fsb - 16 dB

Harmonic Suppression:
60 dB or better below PV

Spurious Suppression Measured Without Notch Filter:
60 dB or better below PV for products at 10 MHz or
more from PV
40 dB or better below PV for products within 10 MHz
from PV

Spurious Suppression Measured With Notch Filter:
60 dB or better below PV for all products

RF Monitor Level/Connector:
Approx -47 dB below PV/BNC connector

Plate Voltage:
3.2 KV

Plate Current:
400 mA (idle/no drive)
450/550 mA (high/low band, at rated power)
700/800 mA (high/low band, black level)
950 mA (overload intervention)

Max Plate Dissipation:
2 KW

Bias Voltage:
-25 TO -55 VDC

Screen Grid:
600 V

Filament Voltage:
3.8 V DC +/-5%

Filament Current:
19.5 A +/-2A

AC Line Requirement:
220 VAC single phase +/- 15% 60 Hz +/- 2% (50 Hz +/-
2% on request)

AC Line and Ground Connection:
Hard wired. Typical power consump 3600 VA at rated power

Power Factor:
0.9 or better

Protection Circuits:
Excessive VSWR, plate overload, main AC line (25 A max),
filament (1 A max), control system (1 A max)

Remote On Off:
10 - 122 NC contacts on terminal board

Remote Plate Voltage:
171 - 55 NC contacts on terminal board

Driver Enable:
11 - 12 contacts closed in presence of high voltage (max 1 A
24 VDC)

Remote Control (TLC/TLS):
M 10 on terminal board

Ambient Temperature:
+5 C (+40 F) to +45 C (+112 F)

Relative Humidity:
< 90%

Max Altitude:
2000 m above sea level

Dimensions:
33 rack spaces cabinet 587 mm x 1552 mm x 750 mm (W x
H x D) (23" x 61" x 29 1/2")

Power Supply Module:
19" W x 11 rack spaces H x 23" (600 mm deep)

Cavity Module:
19" 5 rack spaces H x 23" (600 mm deep)

Safety Module:
19" 4 rack spaces H x 23" (600 mm deep)

Notch Filter Module:
19" 3 rack spaces H x 14 1/2" (370 mm deep)

Control System:
19" 1 rack space H x 6" (150 mm deep)

Weights:
Cabinet: 85 Kg (187 Lbs)
Power supply module: 117 Kg (257 Lbs)
Cavity module: 40 Kg (88 Lbs)
Safety Module: 20 Kg (44 Lbs)
Notch Filter: 12 Kg (25 Lbs)
Control System: 2 Kg (4 1/2 Lbs)

619-239-8462
FAX: 619-239-8474

Features and specifications subject to change without notice.

**NEW TWO
YEAR WARRANTY**



JULY 1, 1992

RADIO BROADCAST LINE PRICE SCHEDULE

**APPROX
DELIVERY**

FM EXCITERS/LOW POWER TRANSMITTERS - TRANSLATORS/BOOSTERS:

| | | | | |
|--|---|------|----------|-------|
| P 2 | FRONT PANEL PROGRAMMABLE DC 12-13.8V | 1W | \$ 1,695 | STOCK |
| P 10 | FRONT PANEL PROGRAMMABLE DC 12-13.8V | 10W | 1,895 | STOCK |
| TEX 20 | FRONT PANEL PROGRAMMABLE 117/230V SINGLE PHASE | 20W | 2,795 | STOCK |
| PTX 30 | FRONT PANEL PROGRAMMABLE 117/230V SINGLE PHASE | 30W | 3,595 | STOCK |
| PTX 100 | FRONT PANEL PROGRAMMABLE 117/230V SINGLE PHASE | 100W | 4,695 | STOCK |
| HPT | FRONT PANEL PROGRAMMABLE 117/230V SINGLE PHASE | 20W | 3,695 | C.F. |
| HPT FMR | HPT EXCITER with built-in 88-108 MHz band COMPOSITE PROGRAMMABLE RECEIVER and input for local audio | | 4,985 | STOCK |
| HPT STL | HPT EXCITER with built in 945-952 MHz band COMPOSITE PROGRAMMABLE RECEIVER and input for local audio (can be custom ordered on other input frequency) | | 4,985 | STOCK |
| HPT SGN | HPT EXCITER with built-in STEREO GENERATOR to allow separate L & R input | | 4,985 | STOCK |
| Optional pre-programmed FSK ID keyer for all HPT's | | | 195 | C.F. |

All exciters can be used as stand alone low power transmitters, include low pass/harmonic filter, are instantly programmable with no tuning over the entire FM band and can be custom phase locked to an external reference for synchronous translator/booster applications. Cost for optional built-in stereo generator available for all exciters except P2/P10 is \$1290.

| | | | | |
|---------|--|--|-------|-------|
| LCR-FM | COMPOSITE RECEIVER, FRONT PANEL PROGRAMMABLE 88-108 MHz band for use with any exciter to form a complete translator or booster station | | 2,195 | STOCK |
| LCR-STL | SAME AS LCR-FM BUT ON 945-952 MHz BAND | | 2,195 | STOCK |

FM SOLID STATE BROADBAND AMPLIFIERS:

| | | | | |
|---------|------------------------------------|-----------|--------|--------|
| PJ 100 | 117/230V SINGLE PHASE 15-20W DRIVE | 100W OUT | 2,995 | STOCK |
| PJ 200 | 117/230V SINGLE PHASE 15-20W DRIVE | 200W OUT | 3,195 | 4-6WKS |
| PJ 250 | 117/230V SINGLE PHASE 20-25W DRIVE | 250W OUT | 3,695 | STOCK |
| | OPTIONAL 10W DRIVE | 250W OUT | 3,895 | STOCK |
| PJ 501 | 117/230V SINGLE PHASE 10-15W DRIVE | 500W OUT | 5,995 | STOCK |
| PJ 1002 | 117/230V SINGLE PHASE 25-30W DRIVE | 1000W OUT | 11,995 | 2-4WKS |

All solid state amplifiers include low pass/harmonic filter, are remote control ready and require no tuning over the FM band.

COMPLETE FM TRANSMITTER SYSTEMS, TOTALLY SOLID STATE:

| | | | |
|-------|----------------------------------|--------|--------|
| 100W | SYSTEM, TEX 20 EXCITER + PJ 100 | 5,790 | STOCK |
| 200W | SYSTEM, TEX 20 EXCITER + PJ 200 | 5,990 | 4-6WKS |
| 250W | SYSTEM, TEX 20 EXCITER + PJ 250 | 6,490 | STOCK |
| 500W | SYSTEM, TEX 20 EXCITER + PJ 501 | 8,790 | STOCK |
| 1000W | SYSTEM, PTX 30 EXCITER + PJ 1002 | 14,990 | 2-4WKS |

All solid state transmitter systems include low pass/harmonic filters, are remote control ready, are instantly programmable with no tuning over the entire FM band and can be custom phase locked to an external reference for synchronous translator/booster applications. All solid state amplifiers and transmitters fit inside standard 19" rack cabinets; cabinets may be quoted if desired.

Prices are net and are quoted ex works (no crating). Crating is quoted as a separate item if required. Prices, specifications and expected approximate delivery charges subject to change and all merchandise sold in accordance with the terms and conditions listed in the Bext, Inc. conditions of contract.

TEL 619/239-8462 FAX 619/239-8474

**NEW TWO
YEAR WARRANTY**



JULY 1, 1992

RADIO BROADCAST LINE PRICE SCHEDULE

**APPROX
DELIVERY**

FM AMPLIFIERS, SINGLE TUBE TYPE:

| | | | | |
|---------|------------|---------------------------|---------|--------|
| T 800 | (3CX800) | 20-25W DRIVE, 800W OUT | \$6,495 | 1-3WKS |
| T 1200 | (3CX1500) | 20-25W DRIVE, 1000W OUT | 7,995 | 1-3WKS |
| | or | 25-30W DRIVE, 1200W OUT | 7,995 | 1-3WKS |
| T 1500 | (3CX1500) | 45-50W DRIVE, 1500W OUT | 8,995 | 1-3WKS |
| T 1800 | (3CX1500) | 60-65W DRIVE, 1800W OUT | 9,795 | 1-3WKS |
| T 2000 | (3CX1500) | 65-70W DRIVE, 2000W OUT | 9,995 | 1-3WKS |
| T 5000 | (3CX3000) | 200W DRIVE, 3.0KW OUT | 18,995 | 4-6WKS |
| | or | 250W DRIVE, 3.5KW OUT | 18,995 | 4-6WKS |
| | or | 400W DRIVE, 5.0KW OUT | 18,995 | 4-6WKS |
| T 15000 | (3CX15000) | 400W DRIVE, 10KW OUT | 32,995 | 6-8WKS |
| | or | 800-1000W DRIVE, 15KW OUT | 32,995 | 6-8WKS |
| T 20000 | (3CX15000) | 1500W DRIVE, 20KW OUT | 38,995 | 6-8WKS |
| T 30000 | (3CX20000) | 1200W DRIVE, 30KW OUT | 48,995 | 6-8WKS |

All amplifiers include low pass/harmonic filter and are remote control ready. Standard wiring is: 230V single phase for T 800, T 1200, T 1500, T 1800; 230V three phase for T 2000, T 5000, T 15000, T 20000 and T 30000. Other configurations may be quoted as custom options. Amplifiers of 5,000 watts and up are housed in 19" rack cabinets. All others fit inside standard 19" rack cabinets, but cabinets are not included and may be quoted if required.

COMPLETE FM TRANSMITTER SYSTEMS, TUBE TYPE:

| | | | |
|----------------|----------------------------|--------|--------|
| 800W SYSTEM, | TEX 20 + T 800 | 8,990 | 1-3WKS |
| 1000W SYSTEM, | TEX 20 + T 1200 | 9,990 | 1-3WKS |
| 1200W SYSTEM, | PTX 30 + T 1200 | 11,590 | 1-3WKS |
| 1500W SYSTEM, | PTX 80 + T 1500 | 13,490 | 1-3WKS |
| 1800W SYSTEM, | PTX 80 + T 1800 | 14,290 | 1-3WKS |
| 2000W SYSTEM, | PTX 80 + T 2000 | 14,490 | 1-3WKS |
| 3000W SYSTEM, | TEX 20 + PJ 200 + T 5000 | 24,985 | 4-6WKS |
| 3500W SYSTEM, | TEX 20 + PJ 250 + T 5000 | 25,485 | 4-6WKS |
| 5000W SYSTEM, | TEX 20 + PJ 501 + T 5000 | 27,785 | 4-6WKS |
| 10000W SYSTEM, | TEX 20 + PJ 501 + T 15000 | 40,985 | 6-8WKS |
| 15000W SYSTEM, | TEX 20 + T 1200 + T 15000 | 42,985 | 6-8WKS |
| 15000W SYSTEM, | TEX 20 + PJ 1002 + T 15000 | 47,785 | 6-8WKS |
| 20000W SYSTEM, | PTX 80 + T 1500 + T 20000 | 51,985 | 6-8WKS |
| 30000W SYSTEM, | PTX 30 + T 1200 + T 30000 | 59,985 | 6-8WKS |

All tube type complete FM transmitter systems include low pass/harmonic filters, are remote control ready and can be custom phase locked to an external reference for synchronous translator/booster applications. Single phase or three phase configurations are available, also see section under FM amplifiers. Transmitters of 5,000 watts and up are housed in 19" rack cabinets. All others fit inside standard 19" rack cabinets, but cabinets are not included and may be quoted if required.

MISCELLANEOUS:

| | | | |
|--|--|-------|--------|
| ADDITIONAL MANUALS, EACH | | 25 | STOCK |
| FM LOW PASS/HARMONIC FILTER, N-N IN-OUT, 1KW MAX | | 275 | STOCK |
| 260 BROADCAST STEREO MULTIFUNCTION LIMITER-PROCESSOR FOR FM | | 1,030 | 1-3WKS |
| 705 HIGH PERFORMANCE FM STEREO GENERATOR | | 1,375 | STOCK |
| 715 INTEGRATED FM-STEREO PROCESSOR/GENERATOR | | 1,875 | STOCK |
| PS 1 PILOT SYNCHRONIZER | | 1,695 | 8-9WKS |
| 7/8 " - N ADAPTER to bypass amplifiers with 7/8" output for servicing or emergencies (connects driver to ant.) | | 195 | STOCK |

For custom phase locking exciters (synchronous booster applications) the cost will be quoted on a case by case basis.

TEL 619/239-8462 FAX 619/239-8474

**NEW TWO
YEAR WARRANTY**



JULY 1, 1992

RADIO BROADCAST LINE PRICE SCHEDULE

APPROX
DELIVERY

COMPOSITE FRONT PANEL PROGRAMMABLE 945 - 952 MHz AURAL STL's:

| | | | | |
|------|------------------------|-------------------------------------|----------|-------|
| 1.5W | LC STL SYSTEM, | LCR RECEIVER + 1.5W LCT TRANSMITTER | \$ 3,980 | STOCK |
| 6W | LC STL SYSTEM, | LCR RECEIVER + 6W LCT/6 TRANSMITTER | 5,280 | STOCK |
| 15W | LC STL SYSTEM, | LCR REC + 1.5W LCT TRANSM + 15W AMP | 6,775 | STOCK |
| 1.5W | SD STL SYSTEM, | SDR RECEIVER + 1.5W SDT TRANSMITTER | 6,290 | STOCK |
| 15W | SD STL SYSTEM, | SDR REC + 1.5W SDT TRANSM + 15W AMP | 9,085 | STOCK |
| 1.5W | LCT-STL TRANSMITTER, | 0-100 KHz BASEBAND IN, 1.5W OUT | 1,985 | STOCK |
| 6W | LCT/6-STL TRANSMITTER, | 0-100 KHz BASEBAND IN, 6W OUT | 3,095 | STOCK |
| 1.5W | SDT-STL TRANSMITTER, | 0-200 KHz BASEBAND IN, 1.5W OUT | 2,995 | STOCK |
| | LCR-STL RECEIVER, | 0-100 KHz BASEBAND OUTPUT | 2,195 | STOCK |
| | SDR-STL RECEIVER, | 0-100 KHz + 100-200 KHz OUTPUTS | 3,495 | STOCK |
| | 15W STL AMPLIFIER, | 300mW DRIVE 15W OUT (TYP. 20) | 2,795 | STOCK |

The above STL systems can be special ordered for custom frequencies in the 360 - 960 MHz range (1.5W systems) and in the 760 - 960 MHz range (6W and 15W systems).

COMPOSITE FRONT PANEL PROGRAMMABLE 1.5 - 2.5 GHz AURAL STL:

| | | | | |
|----|---------------|-----------------------------|--------|------|
| 1W | GH STL SYSTEM | 0 - 200 KHz BASEBAND IN/OUT | 10,980 | C.F. |
|----|---------------|-----------------------------|--------|------|

All STL's can be powered by 117/230V S phase or 12V DC. Cost for optional built-in stereo generator available for all STL transmitters is \$1290.

RECOMMENDED SPARE PARTS KITS:

| | | | |
|---|---------|-------|--------|
| RECOMMENDED SPARES (semiconductors, etc.) for: | P2 | 70 | 6-8WKS |
| RECOMMENDED SPARES (semiconductors, etc.) for: | P10 | 140 | 6-8WKS |
| RECOMMENDED SPARES (semiconductors, etc.) for: | TEX 20 | 280 | STOCK |
| ADDITIONAL MAIN SPARES (transformer, fan, etc.) for: | TEX 20 | 240 | 6-8WKS |
| RECOMMENDED SPARES (semiconductors, etc.) for: | PTX 30 | 340 | 6-8WKS |
| ADDITIONAL MAIN SPARES (transformer, fan, etc.) for: | PTX 30 | 280 | 6-8WKS |
| RECOMMENDED SPARES (semiconductors, etc.) for: | PTX 80 | 380 | 6-8WKS |
| ADDITIONAL MAIN SPARES (transformer, fan, etc.) for: | PTX 80 | 340 | 6-8WKS |
| RECOMMENDED SPARES (semiconductors, etc.) for: | PJ 100 | 390 | 6-8WKS |
| ADDITIONAL MAIN SPARES (transformer, fan, etc.) for: | PJ 100 | 290 | 6-8WKS |
| RECOMMENDED SPARES (semiconductors, etc.) for: | PJ 200 | 490 | 6-8WKS |
| ADDITIONAL MAIN SPARES (transformer, fans, etc.) for: | PJ 200 | 390 | 6-8WKS |
| RECOMMENDED SPARES (semiconductors, etc.) for: | PJ 250 | 590 | 6-8WKS |
| ADDITIONAL MAIN SPARES (transformer, fans, etc.) for: | PJ 250 | 390 | 6-8WKS |
| RECOMMENDED SPARES (semiconductors, etc.) for: | PJ 501 | 990 | 6-8WKS |
| ADDITIONAL MAIN SPARES (transformer, fans, etc.) for: | PJ 501 | 580 | 6-8WKS |
| RECOMMENDED SPARES (semiconductors, etc.) for: | PJ 1002 | 1,980 | 6-8WKS |
| ADDITIONAL MAIN SPARES (transformer, fans, etc.) for: | PJ 1002 | 1,160 | 6-8WKS |

STANDARD CRATING CHARGES:

| | |
|---------------------------------------|------|
| PJ 501 and NS 100 | 200 |
| T 800, T 1200, T 1500, T 1800, T 2000 | 300 |
| NS 220, NS 500, PJ 1002 and NS 1000 | 400 |
| T 5000 | 800 |
| T 15000 and T 20000 | 1200 |
| T 30000 and NS 5000 | 2500 |
| NS 10000 | 3000 |
| NS 20000 | 3500 |

All other items are normally boxed at no additional charge. TEL 619/239-8462 FAX 619/239-8474

**NEW TWO
YEAR WARRANTY**



JULY 1, 1992

TELEVISION BROADCAST LINE PRICE SCHEDULE

APPROX
DELIVERY

SOLID STATE TV EXCITERS/LOW POWER TRANSMITTERS:

| | | | | |
|--------|------------------------------|---------|----------|--------|
| TA 280 | AUDIO & VIDEO IN, UHF or VHF | 2W OUT | \$ 6,985 | 2-5WKS |
| TB 280 | AUDIO & VIDEO IN, UHF or VHF | 5W OUT | 7,485 | 2-5WKS |
| TC 280 | AUDIO & VIDEO IN, UHF or VHF | 10W OUT | 9,485 | 2-5WKS |

SOLID STATE TV TRANSLATORS/DRIVERS:

| | | | | |
|--------|---------------------------|---------|-------|--------|
| TA 290 | UHF OR VHF IN, UHF OR VHF | 2W OUT | 6,985 | 7-9WKS |
| TB 290 | UHF OR VHF IN, UHF OR VHF | 5W OUT | 7,485 | 7-9WKS |
| TC 290 | UHF OR VHF IN, UHF OR VHF | 10W OUT | 9,485 | 7-9WKS |

SOLID STATE TV AMPLIFIERS:

| | | | | |
|--------|---------------------|----------|--------|--------|
| TB 360 | 5W IN, UHF or VHF | 25W OUT | 5,585 | 2-5WKS |
| TA 370 | 0.5W IN, UHF or VHF | 50W OUT | 9,485 | 7-9WKS |
| TB 370 | 1W IN, VHF | 100W OUT | 10,485 | 7-9WKS |
| TC 370 | 1W IN, UHF | 100W OUT | 11,985 | 7-9WKS |

SINGLE TUBE TV AMPLIFIERS:

| | | | | | |
|--------------------|-----------------|--------------------|-----------|--------|--------|
| NS 100 | (YD1381) | 3W IN, UHF | 100W OUT | 9,985 | 2-4WKS |
| NS 220 | (TH 339) | 5W IN, UHF | 220W OUT | 16,985 | 6-8WKS |
| NS 500 | (YL1056) | 10W IN, UHF | 500W OUT | 21,985 | 6-8WKS |
| NS 1000 S | (YL1057) | 25W IN, UHF | 1000W OUT | 31,985 | 2-4WKS |
| NS 1000 T | (TH 347/EY 834) | 35W IN, UHF or VHF | 1000W OUT | 46,985 | 7-9WKS |
| NS 2000 | (TH 393) | 60W IN, UHF | 2000W OUT | 77,985 | C.F. |
| NS 5000 | (RS 1034L) | 200W IN, UHF | 5000W OUT | 89,985 | 7-9WKS |
| NS 10000, NS 20000 | | | | C.F. | C.F. |

COMPLETE TV TRANSMITTER SYSTEMS:

| | | | | |
|--------|--|----------------|---------|--------|
| 2W | SYSTEM (TA280 or 290) ALL SOLID STATE | UHF or VHF OUT | 6,985 | 2-5WKS |
| 5W | SYSTEM (TB280 or 290) ALL SOLID STATE | UHF or VHF OUT | 7,485 | 2-5WKS |
| 10W | SYSTEM (TC280 or 290) ALL SOLID STATE | UHF or VHF OUT | 9,485 | 2-5WKS |
| 25W | SYSTEM (TB280 or 290 + TB360) ALL S/S | UHF or VHF OUT | 12,985 | 2-5WKS |
| 50W | SYSTEM (TA280 or 290 + TA370) ALL S/S | UHF or VHF OUT | 16,385 | 7-9WKS |
| 100W | SYSTEM (TA280 or 290 + TB370) ALL S/S | VHF OUT | 17,385 | 7-9WKS |
| 100W | SYSTEM (TA280 or 290 + TC370) ALL S/S | UHF OUT | 18,885 | 7-9WKS |
| 100W | SYSTEM (TB280 or 290 + NS100) SINGLE TUBE | UHF OUT | 15,985 | 2-5WKS |
| 220W | SYSTEM (TB280 or 290 + NS220) SINGLE TUBE | UHF OUT | 24,385 | 6-8WKS |
| 500W | SYSTEM (TC280 or 290 + NS500) SINGLE TUBE | UHF OUT | 30,885 | 6-8WKS |
| 1000W | SYSTEM S (TB280 or 290 + TB360 + NS1000S) ST | UHF OUT | 39,985 | 2-5WKS |
| 1000W | SYSTEM T (TA280 or 290 + TA370 + NS1000T) ST | VHF OUT | 62,985 | 7-9WKS |
| 1000W | SYSTEM T (TA280 or 290 + TA370 + NS1000T) ST | UHF OUT | 62,985 | 7-9WKS |
| 2000W | SYSTEM (TB280 or 290 + NS100 + NS2000) | UHF OUT | 94,885 | C.F. |
| 5000W | SYSTEM (TB280 or 290 + NS220 + NS5000) | UHF OUT | 113,985 | 7-9WKS |
| 10000W | SYSTEM, 20000W SYSTEM | | C.F. | C.F. |

280 SERIES DRIVERS are for AUDIO & VIDEO input, while 290 SERIES DRIVERS are for VHF OR UHF input (translator use). Please specify channel(s) when ordering. Standard wiring is: 230V three phase for 2000W and up, 230V single phase for up to 1000W. 1000W and up are housed in 19" rack cabinets; all others fit inside standard 19" rack cabinets, but cabinets are not included and may be quoted if required. All equipment up to 100W does not include output notch filter (improves sideband products suppression to > 60 dB). Cost for optional output notch filter is \$1,290. All listed TV equipment above 100W includes notch filter. Cost for optional FSK KEYSER is \$690.

TEL 619/239-8462

FAX 619/239-8474

**NEW TWO
YEAR WARRANTY**



JULY 1, 1992

RADIO BROADCAST LINE PRICE SCHEDULE

APPROX
DELIVERY

FM AMPLIFIERS, TUBE TYPE, "L" SERIES:

| | | | |
|-----|------------------------|----------|--------|
| L4 | 200 W drive, 4 KW out | \$15,995 | 4-6WKS |
| L7 | 350 W drive, 7 KW out | 19,195 | 4-6WKS |
| L10 | 250 W drive, 10 KW out | 23,495 | 4-6WKS |
| L20 | 500 W drive, 20 KW out | 32,995 | 4-6WKS |
| L30 | 750 W drive, 30 KW out | 41,995 | 4-6WKS |

All amplifiers include low pass/harmonic filter and are remote control ready. The L7, L10, L20 and L30 amplifiers are three phase. The L4 may be ordered as three phase or single phase.

COMPLETE FM TRANSMITTER SYSTEMS, TUBE TYPE, "L" SERIES:

| | | |
|------------------------------------|--------|--------|
| 4 KW system, TEX20 + PJ200 + L4 | 21,985 | 4-6WKS |
| 7 KW system, TEX20 + PJ501 + L7 | 27,985 | 4-6WKS |
| 10 KW system, TEX20 + PJ250 + L10 | 29,985 | 4-6WKS |
| 20 KW system, TEX20 + PJ501 + L20 | 41,785 | 4-6WKS |
| 30 KW system, TEX20 + PJ1002 + L30 | 56,785 | 4-6WKS |

All transmitters include low pass/harmonic filter, are remote control ready and may be custom phase locked to an external reference for synchronous translator/booster applications.

FM AMPLIFIERS, TUBE TYPE, "D" SERIES:

| | | | |
|--------|------------------------|--------|--------|
| D1000 | 10 W drive, 1000 W out | 6,195 | 1-2WKS |
| D2000 | 10 W drive, 2000 W out | 8,995 | 3-5WKS |
| D3000 | 10 W drive, 3000 W out | 12,795 | 3-5WKS |
| D6000 | 10 W drive, 6000 W out | 16,195 | 3-5WKS |
| D10000 | 10 W drive, 10 KW out | 22,195 | 7-9WKS |
| D15000 | 10 W drive, 15 KW out | 27,195 | 7-9WKS |

All amplifiers include low pass/harmonic filter and are remote control ready. The D1000 is 230 V single phase. The D2000, D3000, D6000 and D10000 may be ordered as three phase or single phase. The D15000 is three phase only. Other configurations can be quoted as custom options.

COMPLETE FM TRANSMITTER SYSTEMS, TUBE TYPE, "D" SERIES:

| | | |
|--------------------------------|--------|--------|
| 1000 W system, TEX20 + D1000 | 8,990 | 1-2WKS |
| 2000 W system, TEX20 + D2000 | 11,790 | 3-5WKS |
| 3000 W system, TEX20 + D3000 | 15,590 | 3-5WKS |
| 6000 W system, TEX20 + D6000 | 18,990 | 3-5WKS |
| 10000 W system, TEX20 + D10000 | 24,990 | 7-9WKS |
| 15000 W system, TEX20 + D15000 | 29,990 | 7-9WKS |

All transmitters include low pass/harmonic filter, are remote control ready and may be custom phase locked to an external reference for synchronous translator/booster applications.

TEL 619/239-8462

FAX 619/239-8474



BEXT LIMITED TWO YEAR WARRANTY POLICY

All the new units of the BEXT Broadcast line are under warranty for a period of two years from the date of the original purchase, according to the original invoice or bill of sale which you will need to retain and show to obtain warranty service.

The warranty includes all costs of parts and labor (with few exceptions, see below) to repair units when it has been determined that they are not performing satisfactorily, except when the malfunction is due to improper use or to transportation damage or to acts of God. In such cases BEXT will still repair the units, but will charge the end user or the shipping company accordingly. Some parts like vacuum tubes, semiconductors, cooling fans and similar standard commercial components are covered by the individual manufacturers' warranties and policies.

All repairs are intended to be performed at the BEXT Inc. main facility unless otherwise specified by BEXT Inc. The warranty does not include shipping charges and all the costs and arrangements for transportation and insurance will be the responsibility of the user. For those cases where it will be determined that the repairs will not be performed at the BEXT Inc. main facility, all travel and lodging expenses for the necessary BEXT personnel will be incurred by the user. All returns for repairs must be sent freight prepaid and follow the procedures stated on the first pages of the BEXT manual. The BEXT main laboratory's phone number is (619)448-2651. The 24 hour a day field support service can be paged by dialing (619)529-4711. BEXT can also be reached during standard business hours at (619)239-8462.

In no event shall BEXT be liable for any indirect, incidental or consequential damages from the sale or use of the product. This disclaimer applies both during and after the term of the warranty.

619-239-8462
FAX: 619-239-8474

WMBP 91.7 FM

• P.O.Box 568 • Belpre, OH 45714 •

(614) 423-1991

Mr. Dennis Pieri
BEXT Inc.
San Diego, California

Dear Dennis,

I want to let you know how pleased we are with your equipment and service. We purchased a TEX 20 and a PJ 200 in March of 1991. We have been very happy with the features and performance of the equipment.

This may sound strange. The quality of the equipment did not become evident until we had a failure. We are on the East coast, you are on the West coast and we were off the air. What we needed was a piece of equipment that we could trouble shoot easily, your technical support and parts. That's just what you did and you did it first class!!

I called your field support number at 10:00 PM and talked to Bob. He was very helpful and we were able to isolate the problem and get back on the air with the exciter only. You then shipped me the parts for the PJ 200 via Next Day Air. We received the parts and made the repair. WMBP was back up to full power!!

This was a team effort. It makes me feel confident to know that I have a quality product and the field support of BEXT on our team.

Thank you!

(signed)

Bill White

