


THORDARSON

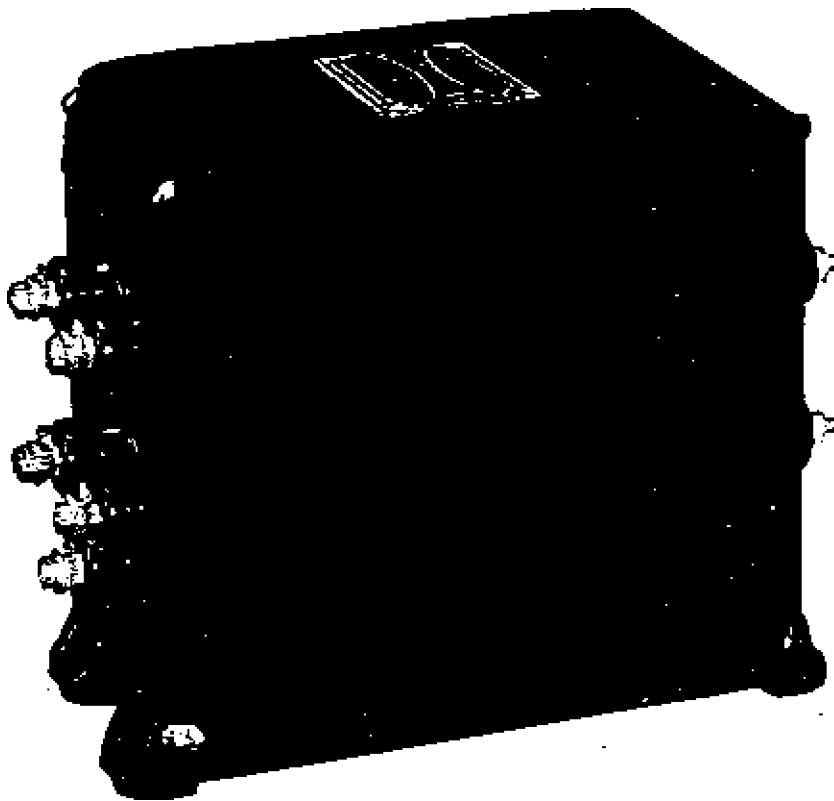

Complete Transformer Catalog 400-C

1938 — FALL — WINTER — 1939

(Supersedes 400-A and 400-AX)

POWER

CHOKES

AUDIO

REPLY

OUTPUT

MODULATION

PLATE

FILAMENT

C. H. T.

TRIO-FIDELITY

THORDARSON ELECTRIC MFG. CO.

500 W. HURON ST., CHICAGO, ILL.

Demand "Power by Thordarson"



POWER TRANSFORMERS



Fig. 3A



Fig. 3A




Fig. 3A

UNIVERSAL DUPLICATE POWER TRANSFORMERS

EASY TO MOUNT IN ANY POSITION (adjustable mounting brackets included) — A TYPE FOR PRACTICALLY EVERY APPLICATION — ELECTROSTATIC SHIELDS — RMA COLOR CODED FLEXIBLE LEADS — PRIMARY 115 VOLTS 50-60 CYCLES — In less than a year the "13R" series has stepped up to first rank in popularity. Specified for over 4000 receivers in the Thornderson Replacement Transformer Encyclopedia, servicemen like their ability to "stay in there and take it." CODE SHOWING FILAMENT CAPACITIES: LETTER (B) INDICATES TYPE OF TUBE; PRIME FIGURE (°) INDICATES NUMBER OF TUBES. THUS B° = TWO 1 AMP. HEATERS @ 2½ VOLTS.

A = 1.75 ampere heaters @ 2½ volts (24, 27, etc.)
 B = 1 ampere heaters @ 2½ volts (56, 58, etc.)
 C = 1.75 ampere power tubes @ 2½ volts (45, 47, etc.)
 D = 0.3 ampere heaters @ 6.3 volts (75, 77, etc.)
 E = 0.7 ampere heaters @ 6.3 volts (42, 6F6, etc.)
 F = 0.25 ampere filaments @ 5 volts (71A's, etc.)

Type No.	List Price	Pri. V.A.	Secondary Volts	M.A.	Filament Windings			Mtg. Fig.	Dimensions			Wt. Lbs.
					Rect.	Fil. No. 1	Fil. No. 2		W.	D.	H.	
T-13R01	\$2.50	60	650 Ct.	40	5V-3A	2.5V-4A Ct. ^{B+C}		3A	2½	2½	3	3½
T-13R02	3.25	60	700 Ct.	50	5V-3A	2.5V-7.5A Ct. ^{A or B+C}		3A	2½	2½	3	3½
T-13R03	3.50	75	700 Ct.	70	5V-3A	2.5V-9A Ct. ^{A or B+C}		3A	2½	3½	3½	4
T-13R04	4.25	115	700 Ct.	90	5V-3A	2.5V-12.5A Ct. ^{A or B+C}		3A	3½	3½	3½	5½
T-13R05	4.00	110	700 Ct.	70	5V-3A	2.5V-9A Ct. ^{A or B}	2.5V-3.5A Ct. ^C	3A	3½	3½	3½	5½
T-13R06	5.25	130	700 Ct.	120	5V-3A	2.5V-12.5A Ct. ^{A or B}	2.5V-3.5A Ct. ^C	3A	3½	3½	4½	6½
T-13R07	5.50	140	800 Ct.	110	5V-3A	2.5V-15A Ct. ^{A or B}	2.5V-3.5A Ct. ^C	3A	3½	3½	4½	6½
T-13R08	4.50	105	700 Ct.	90	5V-3A	6.3V-3.3A Ct. ^{E or D}	2.5V-6A Ct. ^{A or B}	3A	3½	3½	3½	6½
T-13R09	6.50	160	750 Ct.	180	5V-3A	6.3V-3.3A Ct. ^{E or D}	2.5V-6A Ct. ^{A or B}	3A	3½	3½	4½	7½
T-13R00	4.00	70	550 Ct.	70	5V-3A	5V-5A Ct. ^F	2.5V-10.5A Ct. ^{A or B}	3A	2½	3½	3½	4
T-13R11	2.50	60	650 Ct.	40	5V-3A	6.3V-2A Ct. ^{D+E}		3A	2½	2½	3	3½
T-13R12	3.25	65	700 Ct.	70	5V-3A	6.3V-2.5A Ct. ^{D+E}		3A	2½	3½	3	3½
T-13R13	4.00	90	700 Ct.	90	5V-3A	6.3V-3.5A Ct. ^{D+E}		3A	3½	3½	3½	5½
T-13R14	4.25	115	700 Ct.	120	5V-4A	6.3V-4.7A Ct. ^{D+E}		3A	3½	3½	3½	5½
T-13R15	5.75	140	750 Ct.	150	5V-4A	6.3V-5A Ct. ^{D+E}		3A	3½	3½	4½	6½
T-13R16	6.50	180	800 Ct.	200	5V-4A	6.3V-5.1A Ct. ^{D+E}		3A	3½	3½	4½	7½
T-13R17	4.00	85	600 Ct.	60	5V-3A	6.3V-2.5A Ct. ^{D+E}	2.5V-7.5A Ct. ^{A or B+C}	3A	2½	3½	3½	4½
T-13R18	4.75	115	700 Ct.	90	5V-3A	6.3 & 2.5V-3.5A Ct. ^{C or (D+E)}	2.5V-9A Ct. ^{A or B}	3A	3½	3½	4½	5½

SIX VOLT VIBRATOR TRANSFORMERS

These transformers, while primarily designed for replacements using original mounting brackets, are equipped with mounting feet for use in experimental or original equipment.

Type No.	List Price	Secondary		Mtg. Fig.	Dimensions			Wt. Lbs.
		D.C. Volts to Filter	M.A.		W.	D.	H.	
T-14R33	\$2.75	225	40	3C	2½	2½	3½	2
T-14R34	3.25	250	50	3C	2½	2½	3½	2½
T-14R35	3.75	260	60	3C	2½	2½	3½	2½
T-14R36	4.25	285	75	3C	2½	2½	3½	3
T-14R37	4.75	350	75	3C	2½	3½	3½	3½

115 V. 50-60 CYCLE OR 6 V. D. C. VIBRATOR TRANSFORMER

T-14R40	\$5.50	350	185	2G	3½	4	5	8½
		Fil.-6.3 Ct.	4.75 Amp.					




Fig. 3C

OTHER POWER TRANSFORMERS ARE LISTED ON PAGES 4 AND 17




Fig. 2D



Fig. 2G




Fig. 2H

AMPLIFIER AND GENERAL PURPOSE POWER TRANSFORMERS

For continuous duty in high quality receivers or amplifiers where a specific style of mounting is desired.

Type No.	List Price	Pri. V.A.	Secondary			Rect. Fil.	Fil. No. 1	Fil. No. 2	Fil. No. 3	Mtg. Fig.	Dimensions			Wt. Lbs.
			A.C. Volts	D.C. M.A. Tap	Bias						W.	D.	H.	
T-60R49	\$2.25	30	560 Ct.	30		5V-2A	2.5V-3.5A Ct.			2H	3	2½	2¾	2
T-50R02-	2.75	40	620 Ct.	40		5V-2A	2.5V-5A Ct.			2H	3½	3	3	3½
T-49R00-	3.25	65	700 Ct.	70		5V-2A	2.5V-8.5A Ct.			2H	3½	3½	3¾	4½
T-63R62-	3.50	65	700 Ct.	70		5V-2A	2.5V-7A Ct.	2.5V-1.5A Ct.		2H	3½	3½	3¾	4½
T-50R03-	3.75	75	700 Ct.	80		5V-2A	2.5V-12A Ct.			2H	3½	3½	3¾	5½
T-63R63-	4.00	75	700 Ct.	80		5V-2A	2.5V-9A Ct.	2.5V-3A Ct.		2H	3½	3½	3¾	5½
T-70R21-	3.50	70	700 Ct.	70		5V-2A	2.5V-4A Ct.	6.3V-3A Ct.		2H	3½	3½	3¾	4½
T-70R20	2.75	45	600 Ct.	50		5V-2A	6.3V-2A Ct.			2H	3½	2½	3	3
T-75R47	3.75	75	610 Ct.	125		5V-2A	6.3V-2A Ct.			2H	3½	3½	3¾	6
T-70R78	3.25	50	680 Ct.	55		5V-2A	6.3V-1.5A Ct.			2G	3½	3	4½	4
T-70R61	4.00	60	770 Ct.	70		5V-2A	6.3V-2.5A Ct.			2G	3½	3½	4½	4¾
T-56R02-	4.25	70	700 Ct.	70		5V-2A	2.5V-9A Ct.	2.5V-1.5A Ct.		2G	3½	3½	4½	6
T-56R01*	4.75	60	650 Ct.	70		5V-2A	2.5V-3A Ct.	1.5V-1A 1.5V-4A	5V-.5A Ct.	2G	3½	3½	4½	5¾
T-56R03	5.50	85	700 Ct.	105		5V-3A	2.5V-3A Ct.	2.5V-1.75 A Ct.	1.5V-5A 1.5V-1A	2G	3½	3½	5	7½
T-56R04*	5.25	90	700 Ct.	105		5V-3A	2.5V-12A Ct.			2G	3½	3½	5	7½
T-70R62	5.50	110	700 Ct.	145		5V-3A	6.3V-4.5A Ct.			2G	3½	3½	5	8½
T-56R05	5.75	115	700 Ct.	110		5V-3A	2.5V-9A Ct.	2.5V-3A Ct.	2.5V-3A Ct.	2G	3½	3½	5	7¾
T-89R91-	6.25	140	700 Ct.	150		5V-3A	2.5V-9A Ct.	2.5V-3A Ct.	2.5V-3A Ct.	2G	3½	4	5	8½
T-37R70-C	7.50	95	700 Ct.	80		5V-2A Ct.	3V-10A Ct.	5V-2.5A Ct.		2G	4	3½	4½	6¾
T-92R21	7.50	150	800 Ct.	200		5V-3A	6.3V-5A Ct.			2G	4½	3½	4½	9
T-17R30	7.75	200	740 Ct.	280		5V-3A	6.3V-3.5A Ct.			2G	3½	3½	4½	9½
T-17R31	12.50	300	860 Ct.	325		5V-6A	6.3V-4.25A Ct.			2G	4½	5½	6½	13½
T-74R28	6.50	105	880 Ct.	125	38V	5V-3A 2.5V-3A	6.3V-3.3A Ct.			2G	3½	3½	5	8
T-87R85	7.00	105	660 Ct.	160	77V	5V-3A 5V-2A	6.3V-2A Ct.	2.5V-5A Ct.		2G	3½	3½	5	8½
T-68R26	6.75	160	1100 Ct.	150		5V-3A	7.5V-2.5A Ct.	2.5V-5A Ct.		2G	3½	4½	5	10½
T-69R35	6.25	185	775 Ct.	200		5V-3A	6.3V-3A Ct.			2G	3½	4½	5	9½
T-67R93-	8.00	135	700 Ct.	200		5V-3A	2.5V-15A Ct.	5V-2A		2G	3½	4½	5	10
T-75R50	7.50	160	870 Ct.	250	80V	5V-3A 2.5V-3A	6.3V-1.5A Ct.	2.5V-10A Ct.		2G	3½	4½	5	10½
T-83R82	10.00	200	1480 Ct.	140	150V	5V-3A 2.5V-3A	7.5V-2.5A Ct.			2G	3½	4½	5	11½
T-83R85	12.00	290	1480 Ct.	200	150V	5V-3A 2.5V-3A	7.5V-5A Ct.			2G	3½	5½	5	13½
T-89R28	11.00	250	1150 Ct. 640 Ct.	275 75		5V-3A 5V-2A	6.3V-6A Ct.			2G	3½	5½	5	15

*Primary 110 volts — all others 115 volts.

SPEAKER-FIELD SUPPLY TRANSFORMERS

T-67R97	4.25	55	115 V. D.C.	50 to 250	5V-3A					2G	3½	3½	3½	4¾
T-92R53	5.75	120	300 V. D.C.	200	5V-3A					2G	3½	3½	3½	6½

OTHER POWER TRANSFORMERS ARE LISTED ON PAGES 3 AND 17



CHOKES AND AUDIO REACTORS

Oscilloscope and Accessories



FILTER CHOKES

This listing offers a wide choice of mountings, current ratings, inductance and prices for receiver, amplifier and transmitter use. All Thordarson chokes are rated in actual inductance as measured under full rated load.

Type No.	List Price	Current Rating M.A.	Inductance Henries	D.C. Res. Ohms	Volts Ins.	Mtg. Fig.	Dimensions			Wt. Lbs.
							W.	D.	H.	
T-13C26	\$.90	40	7	530	1600	3B	1 3/4	1 3/8	1 3/8	1/2
T-13C27	1.10	40	10	475	1600	3B	2	1 3/8	1 3/8	3/4
T-13C28	1.20	65	10	460	1600	3B	2 3/8	1 3/4	2	1
T-43C92	1.65	75	10	266	1600	2C	1 1/2	2 1/2	2 1/2	1 1/4
T-47C07	1.65	75	12	290	1600	3B	2	2 3/8	2 1/4	1 1/4
T-44C02	1.50	80	12	405	1600	3B	1 1/2	2 3/8	2	1 1/4
T-57C51	1.50	80	5	138	1600	2B	2	2	2 3/8	1 1/4
T-57C52-	1.75					2F	2	2	2 3/8	1 1/2
T-13C29	1.60	85	9	250	1600	3B	2 3/8	2	2	1 1/2
T-68C07	2.00	85	15	375	1600	2B	2	2 1/2	3	2
T-16C07	2.25					2F	3 1/4	2 1/2	3	2 1/4
T-14C31-	2.50					2A	2 1/2	2 1/2	3	2 1/4
T-57C53	2.00	110	9.5	200	1600	2B	2	2 1/2	3	2 1/4
T-57C54	2.25					2F	2 1/2	2 1/2	3	2 1/4
T-49C91-	1.50	120	4.2	160	1600	2F	2	2	2 1/2	1 1/4
T-75C49	1.50	120	7.2	290	1600	3B	2	2 3/8	2	1 1/2
T-53C19	1.50					2B	2	2	2 3/8	1 1/4
T-17C00-B	2.75	150	12	231	1600	2F	2 1/2	3	3 1/2	3 3/4
T-17C00-	3.00					2D	3	3 3/8	3 1/2	3 3/4
T-13C30	2.00	150	8	200	1600	2B	2 1/2	2	2 3/8	2 1/4
T-74C29	3.75	150	15	200	2000	2G	3 1/2	3 3/8	4 3/8	5 1/4
T-67C49	2.75	200	5	80	1600	2F	3	2 1/2	3 1/2	3 3/4
T-23C53-A-	3.00					2D	3	2 3/8	3 1/2	3 1/2
T-54C50-	5.00	250	13	121	1600	3C	3	3 3/4	4 3/8	7 1/4
T-75C51	5.00					2G	3 1/2	3 3/4	5	8




Fig. 2B




Fig. 3B



Fig. 2C



Fig. 2F

AUDIO REACTORS

For use in interstage coupling systems where the voltage drop caused by resistor coupling is objectionable, also for isolating plate current from transformer primaries.
Types T-81C15 and T-93C20 are for use in tuned circuits to accurately a pre-determined band of frequencies, as described in the Thordarson Amplifier Guide, No. 346-B.

Type No.	List Price	Application	Type Tubes	Induct. Henries	At Max. M.A.	D.C. Ohms	Mtg. Fig.	Dimensions			Wt. Lbs.	
								W.	D.	H.		
T-37C36	\$2.00	Plate Impedance	54-30-74-6C5-55-85, etc.	510	5	10	6470	2F	2	2 1/2	2 1/2	1 1/2
T-67C46	1.75							2B	2	2	2 3/4	1 1/4
T-52C98-	1.75	Plate Impedance for Detector tubes or grid impedance	24-57-56-76-8C5-6F5-6J7	1080	.6	8	6150	2F	2	1 1/4	2 3/4	1 1/4
T-29C27	1.50							2B	2 3/4	1 1/2	2	1
T-68C06	2.00	Plate Impedance or Filter	45-46-10, etc.	22	35	35	405	2F	2	2 1/4	2 1/4	1 1/4
T-18C92	1.75							2B	2 3/4	2	2 1/4	1 1/4
T-74A31	3.25	Center tapped impedance		2220	0	8	12210	2F	2 1/2	2 1/2	3	2 1/4
T-81C15	2.50	Tuned Audio Circuits		.75	.5	100	30	2B	1 1/2	1 1/2	2	3/4
T-93C20	3.00	Tuned Audio Circuits		250	.5	8.0	6400	2B	2	2	2 1/2	1 1/4
T-74C30	1.50	Tuned Audio Circuits or Filter		42	15	15	2100	2B	1 1/2	2 1/4	2	1
T-14C70	2.50	Tone Control, Hum Bucking Type		22	0	5	220	3Y	1 1/2	1 1/2	2 1/2	1 1/2

"BUILD-IT-YOURSELF" OSCILLOSCOPE FOUNDATION UNIT

An accurately planned foundation unit with explicit wiring instructions enables the builder to complete a perfectly engineered instrument at reasonable cost. Small overall size makes it ideal for relay rack or servicemen. Magnifying lens gives clear two-inch image.

Type No.	List Price	Description	Dimensions		
			W.	D.	H.
T-11K16	\$3.00	Punched chassis, panel, light shield and instructions	10 1/2	6	6 3/4
T-11K17	2.00	Etched panel	10 1/2		5 3/4
T-11K19	2.25	Cover for T-11K16	10 1/2	6 1/4	5 3/4
T-11K20	2.00	2" lens with retainer ring			
T-92R33	4.00	Power transformer (Described below).			
T-74C30	1.50	Filter choke (see above)			



Circuit diagram, description and parts list given in catalog bulletin SD266

POWER TRANSFORMERS FOR CATHODE RAY TUBES

Specially constructed with large cores for low flux density.

Type No.	List Price	Volts D.C.	M.A.	Rect. Fil.	Fil. No. 1	Fil. No. 2	Mtg. Fig.	Dimensions			Wt. Lbs.
								W.	D.	H.	
T-92R25-	\$2.25	500	3	6.3V-.9A*			2F	2	2 1/4	2 1/4	1 1/4
For 913 tube		tsp-430									
T-92R33	4.00	400	15	6.3V-.9A	6.3V-.6A	6.3V-.6A	2G	3 1/4	4 1/4	3 1/4	3 1/4
For 913 tube		**500	3		No. 3 (2.5V-1.4A)						
T-14R32	5.50	400	15	5V-2A		2.5V-2A.	2G	3 3/4	3 3/4	3 3/4	4
		**500	3	5V-2A Ct.	6.3V-.6A	No. 3 (6.3V-.6A)					

**With half wave rectification.

*For IV rectifier and 913 filament.

TRANSMITTING TYPE CHOKES ARE LISTED ON PAGES 13 AND 18



AUDIO TRANSFORMERS

Receiver and Amplifier



Fig. 2A




Fig. 3B




Fig. 2B



Fig. 2C



Fig. 2F

PLATE TO GRID INTERSTAGE TRANSFORMERS

Here is a variety of units designed for the same general application but varying in size and style of mounting. Type T-75A74 will couple a super-regenerative detector to an audio stage; any tendency toward outside noise is reduced by the static shield between windings.

Type No.	List Price	Application	Ratio	Imped. in ohms		Pri. M.A.	Mtg. Fig.	Dimensions			Wt. Lbs.
				Pri.	Sec.			W.	D.	H.	
T-13A34	\$1.35	10,000 ohm plate to grid	3:1	10,000	90,000	8	3B	2	1 1/2	1 1/2	3/4
T-29A99	1.75	10,000 ohm plate to grid	3.26:1	10,000	106,300	8	2B	2	2	2 3/8	1 1/2
T-86A04-	1.75						3B	2 3/8	2	2	1 1/2
T-57A36	2.00						2F	2	2 1/2	2 3/8	1 1/2
T-47A25	1.75		3:1	10,000	90,000	8	2C	2	1 1/2	2 3/8	1
T-57A37-	2.50	Similar to above	3:1	10,000	90,000	8	2B	2 1/2	2	3	2
T-57A38	2.75	but larger					2F	2 1/2	2 1/2	3	2 1/2
T-29A56-	3.00						2A	2 1/2	2 1/2	3	2 1/2
T-75A74	2.50	10,000 ohm plate to grid Static Shield between primary and secondary.	2:1	10,000	40,000	8	2F	2	2 1/2	2 3/8	1 1/2

PUSH-PULL INPUT TRANSFORMERS

This group serve similar applications, varying in size and frequency response. T-74A31, ordinarily a push pull input transformer, may also be used as a tapped push pull grid impedance with ratios of 1 to 1, 1 to 2 or 1 to 4 by connecting the primary and secondary in series, according to instructions furnished.

T-13A35	\$1.50	10,000 ohm plate to P.P. grids	3:1	10,000	90,000	8	3B	1 1/2	2	1 3/8	3/4
T-33A91	2.00	10,000 ohm plate to P.P. grids	3.26:1	10,000	106,300	8	2B	2	2	2 3/8	1 1/2
T-86A03	2.00						3B	2 3/8	2	2	1 1/2
T-14A29	2.25						2C	2 1/2	1 1/2	2 1/2	1 1/2
T-57A39	2.25						2F	2	2 1/2	2 3/8	1 1/2
T-57A40	2.75	Similar to above but larger	3:1	10,000	90,000	8	2B	2 1/2	2	3	2
T-57A41	3.00						2F	2 1/2	2 1/2	3	2 1/2
T-43A04-	3.25						2A	2 1/2	2 1/2	3	2 1/2
T-74A31	3.25	10,000 ohm plate to P.P. grids	1:1	10,000	10,000	8	2F	2 1/2	2 1/2	3	2 1/2
T-57A42-	3.25	10,000 ohm plate to P.P. grids	3:1	10,000	90,000	8	2B	2 1/2	2	3	2
T-57A43-	3.50						2F	2 1/2	2 1/2	3	2 1/2
T-71A97-*	5.00	8,000 ohm plate to P.P. grids	2.7:1	8,000	44,000	40	2D	2 1/2	3	3 1/2	3 1/2

*Single 6F6 Triodes to P.P. 845 grids

PUSH-PULL INTERSTAGE TRANSFORMERS

For connecting push-pull plates to push-pull grids, these types offer a choice of size and ratio. Suitable for replacement or amplifier circuits.

T-13A36	\$1.75	P.P. 10,000 ohm plates to P.P. power tube grids	1:1	20,000	20,000	8*	3B	2	2 3/8	1 3/4	1
T-67A91†	3.00	P.P. 10,000 ohm plates to P.P. or P.P. par. power tube grids	1.5:1	20,000	45,000	10*	2B	2 1/2	2 1/2	3	2
T-58A70†	3.25						2F	2 1/2	2 1/2	3	2 1/2
T-75D57-	5.00	P.P. 6F6 Triodes to 845's P.P.	2.35:1	16,000	117,000	40*	2D	2 1/2	3	3 1/2	3 1/2

*Per side. †Split sec.

UNIVERSAL AUDIO REPLACEMENT TRANSFORMERS

To couple single plate to single grid; single plate to push-pull grids; push-pull plates to push-pull grids. Has split secondary.

T-17A02	\$2.25	Universal	3:1	Universal	10	2F	2	2 1/2	2 3/8	1 1/2
---------	--------	-----------	-----	-----------	----	----	---	-------	-------	-------

DRIVER TRANSFORMERS

Especially designed for replacement use.

Type No.	List Price	Driver Tubes	Output Tubes	Ratio Pri. to Sec.	Class	Ohms Imped.		Pri. M.A.	Mtg. Fig.	Dimensions			Wt. Lbs.
						Pri.	1/2 Sec.			W.	D.	H.	
T-78D46	\$1.50	1-30	1-1J6G, 19-2-30	2.4:1	B	20,000	3,500	7	2B	1 1/2	1 1/2	2	3/4
T-17D01	2.25	1-6F6 Triode 1-42 Triode 1-2A6 Triode	2-6F6, 6L6, etc.	1.7:1 1.5:1 1.3:1	AB	10,000	3,300 4,500 5,800	31	3B	2 3/8	2	2	1 1/2

OTHER AUDIO TRANSFORMERS ARE LISTED ON PAGES 19 AND 23



DRIVER TRANSFORMERS




Fig. 2D




Fig. 2T




Fig. 2R




Fig. 4D

UNIVERSAL DRIVER TRANSFORMERS

Five usable ratios, very helpful for circuit changes, make these driver transformers companion units to the Universal Modulation Series. A complete table of Driver and Modulator Combinations appears on pages 20 and 21.

Type No.	List Price	Cap. Watts	Max. Pri. M.A. Per Side	Ratio Pri. to 1/2 Sec.	Mtg. Fig.	Dimensions			Wt. Lbs.
						W.	D.	H.	
T-19D01	\$6.00	15	60	1:1, 1.2:1, 1.4:1, 1.6:1, 1.8:1	4D	2 1/4	3	3 1/2	3 1/2
T-19D02	6.00	15	60	2:1, 2.2:1, 2.4:1, 2.6:1, 2.8:1	4D	2 1/4	3	3 1/2	3 1/2
T-19D03	6.00	15	60	3:1, 3.2:1, 3.4:1, 3.6:1, 3.8:1	4D	2 1/4	3	3 1/2	3 1/2
T-19D04	6.00	15	60	4:1, 4.5:1, 5:1, 5.5:1, 6:1	4D	2 1/4	3	3 1/2	3 1/2

DRIVER TRANSFORMERS (FOR SPECIFIC APPLICATIONS)

The driver transformer is an important link in a Class AB or Class B amplifier system. The flow of current in the power tube grid circuit requires exceedingly good regulation of driver tubes and coupling transformer. Theodson driver transformers have the correct primary to secondary ratio for the tubes specified, insuring minimum driver distortion on the positive grid peaks.

Type No.	List Price	Driver Tubes	Output Tubes	Class	Ratio Pri. to 1/2 Sec.	Pri. M.A.	Mtg. Fig.	Dimensions			Wt. Lbs.
								W.	D.	H.	
T-54D63	\$2.50	1-30 1-49 1-6C5	1-1J6G, 19 2-49 2-6V6	B B AB2	2.4:1	7	2F	2	1 1/4	2 1/4	1 1/4
T-67D50	2.75	1-89 Triode	1-79	B	2:1	32	2F	2	2 1/4	2 1/4	1 1/2
T-67D89-	3.25	1-89 Triode	2-79	B	3:1	32	2F	2 1/2	2 1/2	3	2 1/2
T-67D47	2.50	1-6N7, 6A6, 53	1-6N7, 6A6, 53	B	5.25:1	10	2F	2	2 1/4	2 1/4	1 1/2
T-81D52	3.50	1-6C5, 76 1-56	2-6F6 Triode 2-42, 2A5 Triode	AB AB	1.82:1 1.67:1	8	2F	2 1/2	2 1/2	3	2 1/4
T-84D59*	3.50	2-6C5, 6N7 2-6A6, 53	2-6L6, 6V6 2-6N7, 6A6, 53	AB2 B	5:1	10	2F	2 1/2	2 1/2	3	2 1/4
T-72D01-	3.75	2-6C5, 76, 56	2-45	AB	2.7:1	10	2F	2 1/2	2 1/2	3	2 1/4
T-74D32	3.50	2-6C5, 76, 56	2-6F6, 42, 2A5 4-2A3, 6B4G	AB2 AB	3:1	10	2F	2 1/2	2 1/2	3	2 1/4
T-65D78-	4.00	1-6F6 Triode 1-42 Triode 1-2A5 Triode	2-6F6 Triode 2-42 Triode 2-2A5 Triode	AB2 AB2 AB2	2:1	40	2F	2 1/4	3	3 1/2	3 1/2
T-81D42	3.25	1-6F6 Triode 1-42 Triode 1-2A5 Triode	2-6F6 Triode 2-42 or 2-2A5 Pentode	AB2 AB2 AB2	1.7:1 1.5:1 1.3:1	31	2F	2 1/4	2 1/2	3	2 1/4
T-67D78	3.00	1-46, 59, 6F6,	2-46, 59	B	2.2:1	32	2F	2 1/4	2 1/4	3	2 1/4
T-52D89-	3.75	42, 2A5 Triode					2A	2 1/2	2 1/2	3	2 1/4
T-66D98-	5.25	2-46, 6F6, 42, 45, 59, 2A5 P-P Triodes	4-46 4-59	B B	4:1	32	2R	2 1/4	4 1/4	3 1/2	4 1/2
T-83D83-	3.75	2-46 P-P	2-250	AB2	1.6:1	40	2F	2 1/4	2 1/4	3	2 1/4
T-51D00*	4.50	2-6F6, 42, 45, 2A5 P-P	2-210, 801, 35T	B	2:1	40	2A	2 1/4	3	3 1/2	3 1/4
T-64D22*	5.00	2-45, 2A3	2-800, 830B, etc.	B	1.65:1	40	2T	2 1/4	3 1/4	4 1/4	4 1/4
T-80D54*	5.50	2-6F6 P-P Triodes 2-42 P-P Triodes	2-838 2-830B, 800	B B	4:1	40	2G	3 1/4	3 1/2	4 1/4	5 1/4
T-83D86-	3.75	2-2A3 P-P	4-250	AB2	1.47:1	40	2F	2 1/4	2 1/4	3	3 1/2
T-61D40*	5.50	2-2A3 P-P	2-50T, 150T 2-203A, 801	B B	1.67:1	130	2D	3 1/4	3 1/4	4	5
T-75D10*	5.50	2-2A3 P-P	2-838 2-805, TZ-40	B B	3.2:1	130	2D	3 1/4	3 1/4	4	5

*Split-Secondary

MULTI-MATCH DRIVER TRANSFORMERS ARE LISTED ON PAGE 19




Fig. 2B



Fig. 2F




Fig. 2E



Fig. 2C



Fig. 3E

OUTPUT TRANSFORMERS TO LINE OR SPEAKER (HIGH LEVEL)

Power tubes require the correct plate load for maximum power output with a minimum of distortion. Thoradson output transformers will satisfy the plate requirements of tubes as used in amplifiers, radio receivers, and amateur equipment. Several secondary impedances are incorporated to accommodate various speaker combinations.

Type No.	List Price	Tube Type	Class	Ohms Impedance		Pri. M.A. Per Side	Max. Watts	Mtg. Fig.	Dimensions			Wt. Lbs.
				Pri.	Sec.				W.	D.	H.	
T-13S37	\$1.25	1-6F6, 42, 2A5, 47	A	7,000	1-2-4	36	5	3E	1 3/4	1 3/8	1 3/8	1 1/2
T-13S39	1.25	1-45, 12A5 1-31, 43, 71A	A	4,000	1-2-4	36	5	3E	1 3/4	1 3/8	1 3/8	1 1/2
T-13S43	1.35	1-1F4, 1D4, 1F5G	A	16,000	1-2-4	10	5	3E	1 3/4	1 3/8	1 3/8	1 1/2
T-33S99	1.50	2-45, 71, 43, 25A6 P-P 1-6N7, 6A6, 53 P-P	A B	8,000	6 to 12	36	10	2B	2	2	2 3/4	1 1/4
T-13S40	1.75	2-6F6, 42 P-P 2-2A5, 47 P-P	A A	14,000	1-2-4	40	10	3E	2	1 1/2	1 3/8	3/4
T-81S01	1.65	1-19, 1J6G P-P 2-30, 49 P-P 2-31 P-P	B B A	10,000	2-4-8	15	8	2B	1 3/4	1 3/8	2	1/2
T-17S10	3.50	1-6L6	A	2,500	2-4-8-500	80	8	2F	2 1/2	2 1/2	3	2 1/2
T-17S11	4.00	2-6V6 P-P	AB1	8,000*	4-8-15-250-500	52	15	2F	2 3/4	3	3 1/2	3 1/2
T-17S12	4.00	2-6L6 P-P	AB1	4,300*	4-8-15-250-500	95	25	2F	2 3/4	3	3 1/2	3 1/2
				(with 300 V. on plate and screen)								
T-17S13	6.50	2-6L6 P-P	AB1	6,600*	4-8-15-250-500	80	34	2G	3 3/8	3 3/8	4 3/8	5 1/2
T-17S14	6.50	2-6L6 P-P	AB2	5,500*	4-8-15-250-500	90	40	2G	3 3/8	3 3/8	4 3/8	5 1/2
T-17S15	7.00	4-6L6 P-P Par.	AB1	3,300*	4-8-15-250-500	155	60	2G	3 3/8	3 3/8	4 3/8	5 1/2
T-68S06	2.50	1-6F6, 42, 2A5 1-47, 31, 33	A A	7,000	10 or 2,000	36	5	2F	2	1 1/4	2 3/8	1
T-67S51	3.50	2-6F6, 42, 2A5, 47 P-P 1-79 P-P	A B	14,000	4-8-15-500	40	20	2F	2 1/2	2 1/2	3	2 1/4
T-67S48	3.50	2-45, 71, 43, 25A6 P-P 1-6N7, 6A6, 53 P-P	A B	8,000	4-8-15-500	36	25	2F	2 1/2	2 1/2	3	2 1/4
T-67S60	2.50	1-19, 1J6G P-P 2-30, 49 P-P 2-31 P-P	B B A	10,000	4-8-2000	15	10	2F	2	2 1/4	2 3/8	1 1/4
T-67S52	4.00	2-46, 59 P-P 2-6F6, 42, 2A5 P-P 2-6N7, 6A6, 53 P-P Par.	B AB2 B	5,800	4-8-15-500	60	30	2F	2 3/4	3	3 1/2	3 1/2
T-58S72	3.75	2-2A3, 6B4G P-P 2-48, 25L6 P-P	AB A	3,000	4-8-15-500	60	30	2F	2 3/8	3	3 1/2	3 1/4
T-67S54	4.00	2-6L6 P-P 2-2A3, 6B4G, 45 P-P 2-19 P-P Par.	A AB B	5,000	4-8-15-500	60	30	2F	2 3/8	3	3 1/2	3 1/2
T-67S92	4.00	4-2A3, 6B4G, 45 P-P Par. 4-48, 25L6 P-P Par.	AB A	1,500	4-8-15-500	80	40	2F	2 3/8	3	3 1/2	3 1/2
T-65S94	4.00	2-50 P-P 2-6F6, 42, 2A5 P-P 1-79 P-P	A AB2 B	8,000	4-8-15-500	55	40	2F	2 3/8	3	3 1/2	3 1/2
T-75S75	4.00	2-6F6, 42 or 2A5 1-6N7, 6A6, 53 P-P 2-6N6G, 6B5, 2B6, 6AC5 P-P	AB2 B A	10,000	4-8-15-500	45	40	2F	2 3/8	3	3 1/2	3 1/2
T-84S58	6.00	2-6L6 P-P	AB2	3,800	4-8-15-500	115	60	2G	3 3/8	3 3/8	4 3/8	6
T-89S75	4.00	2-6L6 P-P	AB1	6,600	4-8-15-500	80	40	2F	2 3/4	3	3 1/2	3 1/2
T-89S74	3.75	1-6L6	A	4,000	4-8-15-500	70	15	2F	2 1/2	2 1/2	3	2 1/4
T-89S68	6.50	4-6L6 P-P Par.	AB1	3,300	50-125-200 250-333-500	150	75	2G	3 3/8	3 3/8	4 3/8	5 3/4
T-83S84	6.00	2-50 P-P	AB2	5,000	4-8-15-500	80	45	2G	3 3/8	3 1/2	4 3/8	5 1/2
T-83S87	8.00	4-50 P-P Par.	AB2	3,000	4-8-15-500	160	90	2G	3 3/8	3 3/8	5	7 3/4
T-61S67	12.00	2-845 P-P	AB	8,000	500	150	110	2L	4 1/4	4 1/4	6 1/4	12 3/4
T-67S55	12.00	2-800 P-P	B	12,500	500	150	110	2L	4 1/4	4 1/4	6 1/4	12 3/4

*10% feed back winding.



Universal Output and Microphone Transformers

UNIVERSAL OUTPUT TRANSFORMERS

Favored by many because of their wide plate impedance and voice coil coverage. Proper matching of load impedances to speaker voice coils is accomplished by using taps as specified in the instructions sheet.

Type No.	List Price	Tube Type	Class	Ohms Impedance		Pri. M.A. Per Side	Max. Watts	Mtg. Fig.	Dimensions			Wt. Lbs.
				Pri.	Sec.				W.	D.	H.	
T-13S38	\$1.50	Univ. Single	A	4,000/7,000	Adjustable	36	8	3E	2	1 3/4	1 3/4	3/4
T-57S01	2.00	or P-P Tubes	A	8,000/10,000	.1 to	36	8	2E	2	2 1/4	2 1/4	1 1/4
T-17S57	2.25		A	14,000 Ct.	29			2C	2 1/2	1 1/4	2 1/4	1 1/4
T-13S42	1.50	Universal Single Tube	A	1,500/2,000	Adjustable	55	10	3E	2	1 3/4	1 3/4	3/4
T-13S41	3.00	Universal P-P Tubes	A	3,000/5,000	Adjustable	60	20	2E	2 1/2	2	3	2 1/4
				6,600/7,000	.1 to 29							
				8,000/10,000								

UNIVERSAL TUBE TO LINE TRANSFORMERS

T-61S25	3.50	Univ. Single Tube		2,500/4,000	500	60	10	2E	2 1/2	2	3	2 1/4
				5,000/6,000/7,000								
T-61S26	3.50	Univ. P-P Tubes		8,000/10,000	500	55	10	2E	2 1/2	2	3	2 1/4
				12,000/14,000 Ct.								

UNIVERSAL LINE TO SPEAKER TRANSFORMERS

Type No.	List Price	Application	Pri.	Sec.	Max. Watts	Mtg. Fig.	W.	D.	H.	Wt. Lbs.
T-53S81	\$4.00	Line to Voice Coil	500/250	4-8-15	35	2D	2 1/2	3	3 1/4	3 1/2
T-60S48	3.00	Line to Voice Coil	500/1,000	Pri. as 500 ohm-	10	2E	2 1/2	2	3	2
		1 to 6 may be con. in par. to 500 ohm line	1,500/2,000	.06 to 8.; pri. as						
			2,500/3,000	1,000 ohm .12 to 16, etc.						
T-14S80	2.00	Line to Voice Coil	500	2-4-6-8	12	2E	2	2	2 1/4	1 1/2
T-76S74	3.00	Line to multiple spkrs. (auto transformer)	500	250/166/125 100/84	30	2E	2 1/2	2	3	2 1/4

LOW IMPEDANCE SOURCE (MICROPHONE, LINE, MIXER) TO GRID TRANSFORMERS

A complete line of low level input, microphone, line, and mixer transformers to fit all applications. Special winding methods result in low leakage reactance so essential to good frequency response. Several styles of mountings are offered for the most popular types.

Type No.	List Price	Application	Impedance in ohms		Overall Ratio	Mtg. Fig.	W.	D.	H.	Wt. Lbs.
			Pri.	Sec.						
T-65A73	\$2.75	DB mike to grid	200 Ct.		1:22.2	2F	2 1/2	2 1/2	3	3
T-68A22-	2.50		2B	2 1/2		2 1/2	3	3		
T-30A20-	3.00		2A	2 1/2		2 1/2	3	3		
T-58A37	2.25	DB mike to grid	200 Ct.	100,000	1:22.2	2F	2	2 1/2	2 1/2	1 1/2
T-43A78	2.00	Single button mike to grid	100		1:64	2F	2	1 1/2	2 1/4	1 1/4
T-86A02	1.75		2B	2		1 1/2	2 1/4	1		
T-23A57-	2.25		2A	2		1 1/2	2 1/4	1 1/4		
T-55A16	2.75		2F	2		2 1/4	2 1/4	1 1/2		
T-63A72	3.75	1, 2, 3 or 4 circuit mixer to grid	50, 100, 150, 200	100,000	1:22.2	2F	2 1/2	2 1/2	3	2 1/4
T-63A71	3.75	1, 2, 3 or 4 circuit mixer to grid	200, 400, 600, 800	100,000	1:11	2F	2 1/2	2 1/2	3	2 1/4
T-61A94	3.25	Line to single or P.P. Cl. A grids	500/125	100,000 Ct.	1:14.1	2F	2 1/2	2 1/2	3	2 1/4
T-62D65-	6.00	Line to 845 Class AB grids	500	7,320	1:3.8	2D	3 1/2	3 1/2	4	5
T-93A12-	6.00	Line to P.P. Class A 845's, etc.	500	80,000 Ct.	1:3.85	2D	3 1/2	3 1/2	4	4 1/2
T-43D21	3.50	Line to P.P. grids of 6L6's or 6Q's Class AB	500	5,100 12,500	1:3.2 1:5	2F	2 1/2	2 1/2	3	2 1/4
T-67D34-	7.50	Line to P.P. Par. 203A, 538, 811 grids, Class B	500	900	1:1.34	2D	3 1/2	3 1/2	4	5

MICROPHONE OR PICK-UP TO LINE OR MIXER TRANSFORMERS

Type No.	List Price	Application	Impedance in ohms		Pri. M.A.	Mtg. Fig.	W.	D.	H.	Wt. Lbs.
			Pri.	Sec.						
T-63A73-	\$3.25	DB or dynamic mike to line or mixer	200 Ct.		300/50	2F	2 1/2	2 1/2	3	2 1/4
T-67A45-	3.50		2A	2 1/2		2 1/2	3	2 1/4		
T-70A82	3.50	DB mike to line	200 Ct.	500/125	2F	2 1/2	2 1/2	3	2 1/4	
T-70A83	3.50	Crystal mike to line or mixer	100,000	200/50	2F	2 1/2	2 1/2	3	2 1/4	
T-61A96-	3.50	Pick-up or line to line or mixer	500/125	200/50	2F	2 1/2	2 1/2	3	2 1/4	
T-63A74-	2.50	Pick-up to line or mixer	5,000/2,000	200/50	2F	2	2 1/2	2 1/2	1 1/2	

TUBE TO LINE OR MIXER TRANSFORMERS (LOW LEVEL)

T-55A15-	\$2.25	Plate to line or mixer	15,000/10,000	200/50	3	2F	2	2 1/2	2 1/2	1 1/2
T-62A26-	2.25	Plate to line or mixer	15,000/10,000	500/125	3	2F	2	2 1/2	2 1/2	1 1/2
T-72A11-	2.50	P.P. plates to line	20,000 Ct.	500/125	8**	2F	2	2 1/2	2 1/2	1 1/2
T-75A73-	2.50	P.P. plates to line or mixer	20,000 Ct.	200/50	8**	2F	2	2 1/2	2 1/2	1 1/2
T-14A99	2.50	Sgl. or P.P. Plates to line or mixer	20,000 Ct.	500/125	8	2F	2	2 1/2	2 1/2	1 1/2
T-14A91	2.50	Sgl. or P.P. Plates to line or mixer	20,000 Ct.	200/50	8	2F	2	2 1/2	2 1/2	1 1/2

**Per Side.

SEE PAGES 10 AND 19 FOR MODULATION AND OTHER OUTPUT TRANSFORMERS




Fig. 2D



Fig. 2F




Fig. 2Q




Fig. 2N

UNIVERSAL MODULATION TRANSFORMERS

Tapped coils are provided to give this series a wide range of application, an important feature for the experimenter. See pages 20 and 21 for complete table of Driver and Modulator Combinations.

Type No.	List Price	Cap. Watts	Pri. M.A. Per Side	Secondary M.A.		Mtg. Fig.	Dimensions			Wt. Lbs.
				Series	Par.		W.	D.	H.	
T-19M14	\$ 7.00	30	75	75	150	2N	3 1/2	3 1/2	4	4 1/2
T-19M15	10.00	60	125	125	250	2N	3 1/2	4 1/2	4	6 1/2
T-19M16	15.00	100	175	175	350	2N	4 1/2	5	6	12 1/2
T-19M17	24.00	250	225	225	450	2Q	5 1/2	8 1/2	7 1/2	30 1/2

MODULATION TRANSFORMERS (FOR SPECIFIC APPLICATIONS)

This series of modulation transformers meets the need for efficient, quiet, long life units at reasonable costs. Engineered and constructed for specific tube types, their efficiency is high and the frequency characteristics are good.

Type No.	List Price	Tube Type	Class	Ohms Impedance		Max. D.C. Sec. M.A.	Max. Audio Pwr. Watts	Mtg. Fig.	Dimensions			Wt. Lbs.
				Pri.	Sec.				W.	D.	H.	
T-67M69	\$ 2.75	1-19	B	10,000	2,700	50	10	2F	2	2	2 1/2	1 1/2
T-17M59	3.50	1-6A5, 6N7	B	10,000	3,000, 3,750, 4,500	100	10	2F	2 1/2	2 1/2	3	2
T-64M26	6.00	2-46 or 59 2-250	B AB	5,800	8,000 10,000	100	40	2D	3 1/2	3 1/2	4	5
T-19M21	7.00	2-TZ-20	B	10,000	3,750 6,500	200	75	2D	3 1/2	4 1/2	4	7
T-19M22	10.00	2-809 2-RK-12	B B	8,400	8,000 7,850	200 160	100	2D	4 1/2	4 1/2	6	13 1/2
T-84M70	10.00	2-6L6 2-35T 4-210	AB B B	3,800	2,500 5,000 7,500	250 200 150	75	2D	4 1/2	6 1/2	6 1/2	14 1/2
T-14M49	16.50	2-TZ-40	B	5,900	2,850 4,500 6,500	350 300 235	175	2Q	5 1/2	7 1/2	6 1/2	20
T-67M59-	3.00	1-53	B	10,000	3,000	100	20	2F	2 1/2	2 1/2	3	2
T-72M02-	6.00	2-2A3	AB	5,000	3,000, 5,000	125	50	2D	4 1/2	4 1/2	5	6
T-64M25-	7.50	2-TZ-20, 210	B	8,000	5,000, 10,000	200	40	2D	3 1/2	4 1/2	4 1/2	8
T-70M84-	15.00	2-801, TZ-20, 35T	B	10,000	4,500, 6,250, 12,500	200	150	2Q	5 1/2	8	6 1/2	20 1/2
T-82M08-	15.00	2-800 2-809	B B	6,000	8,000 20,000	200 100	150	2Q	5 1/2	8	6 1/2	20 1/2
T-64M24-	22.00	2-838, 203B 203Z, 203A, T55	B B	8,000	2,500 10,000	400 200	300	2Q	6	8 1/2	7 1/2	30 1/2
T-75M11-	22.00	2-ZB-120 HK-154, 838	B B	10,000	2,500 10,000	400 200	300	2Q	5 1/2	8 1/2	7 1/2	30
T-82M09-	24.00	2-50-T	B	20,000	2,500 10,000	400 200	300	2Q	6 1/2	9 1/2	7 1/2	29 1/2
T-82M10-	40.00	2-806 2-HK-354E	B B	11,000	4,000 9,000	500 330	650	2Q	7 1/2	7 1/2	9 1/2	45
T-82M25	40.00	2-806, HD-203A, 822	B	9,000	4,000, 6,000, 8,000	600	650	2Q	8	6 1/2	8	47

GRID MODULATION TRANSFORMERS

T-67M73	3.50	1-42, 6F6, 46 Triode	A	6,300	5,400	32	10	2D	2 1/2	2 1/2	3	2 1/2
T-67M74	4.50	P.P. 45-2A3	AB	5,000	6,000	60	20	2D	2 1/2	3	3 1/2	3 1/2

PLATE AND SCREEN MODULATION TRANSFORMER

T-79M94-	5.50	42's or 2A3's To Plate & Screen of 2-802	AB	8,000	5,000 plate 800 screen	100 50	40	2G	3 1/2	3 1/2	4 1/2	5 1/2
----------	------	---	----	-------	---------------------------	-----------	----	----	-------	-------	-------	-------

MODULATION TRANSFORMERS FOR MATCHING LINES TO R. F. LOADS

Primaries of these transformers may be connected directly to the 500 ohm output terminals of any amplifier or receiver. Type T-83M22 is equipped with a tap at 200 ohms for use with "Beetling 14" receivers.

Type No.	List Price	Pri. Ohms	Secondary Ohms Load	Max. D.C. Sec. M.A.	Max. Watts	Mtg. Fig.	W.	D.	H.	Wt. Lbs.
T-73M52	\$16.00	500	5,000-8,000-7,000-8,000-9,000-10,000	215	80	2Q	5 1/2	8	6 1/2	21
T-43M22	8.00	500-200	5,000-6,000-7,000-8,000-9,000-10,000	150	80	2N	3 1/2	4 1/2	4 1/2	8

SEE PAGE 19 FOR MULTI-MATCH MODULATION TRANSFORMERS



PLATE SUPPLY TRANSFORMERS



PLATE SUPPLY TRANSFORMERS (AMATEUR) Primary 115 Volts 50-60 Cycles

These plate transformers are rated in D.C. voltages from a two section filter, including the voltage drop through the rectifier tubes. Designed especially for Amateur Short Wave equipment. Ratings are ample for this type of intermittent service. Electrostatic shield between primary and secondary.

Type No.	List Price	Sec. A.C. Load Volts	D.C. Volts	Bias Tap	D.C. M.A.	Mtg. Fig.	Dimensions			Wt. Lbs.
							W.	D.	H.	
T-19P55	\$ 7.50	660-0-660 550-0-550	500 400	30 V.	250	2G	3 1/8	3 1/2	4 1/8	8
T-19P56	8.00	900-0-900 800-0-800	750 600		225	2G	3 1/8	4	4 1/8	10
T-19P57	10.00	1075-0-1075 507-0-507	1000* 400		125 150	2G	3 1/8	4 1/4	4 1/8	10 1/2
T-19P58	13.00	1200-0-1200 900-0-900	1000* 750		200 150	2G	4 1/2	5 1/2	6 1/8	19
T-19P59	16.00	1560-0-1560 1250-0-1250	1250 1000		300	2K	5 1/8	7	7	26 1/2
T-19P60	18.50	1875-0-1875 1560-0-1560	1500 1250		300	2K	6 3/4	4 1/8	7	29 1/2
T-19P61	20.00	2125-0-2125 1875-0-1875	1750 1500		300	2K	6 3/4	4 1/2	7	31 1/2
T-19P62	21.50	2420-0-2420 2125-0-2125	2000 1750		300	2K	6 3/4	5	7	34 1/2
T-19P63	23.00	1560-0-1560 1265-0-1265	1250 1000		500	2K	6 3/4	5 1/4	7	38
T-19P64	29.50	1875-0-1875 1560-0-1560	1500 1250		500	2K	6 3/4	6	7	43 1/2
T-19P65	29.50	3000-0-3000 2420-0-2420	2500 2000		300	2K	6 3/4	6	7	44
T-19P66	37.50	2125-0-2125 1875-0-1875	1750 1500		500	2K	6 3/4	4 1/2	10	45 1/2
T-19P67	42.50	2450-0-2450 2125-0-2125	2000 1750		500	2K	6 3/4	4 3/4	10	51
T-19P68	50.00	3000-0-3000 2450-0-2450	2500 2000		500	2K	6 3/4	5 3/4	10	61

*These transformers designed for double rectifiers and will deliver both secondary ratings simultaneously.




Fig. 3C




Fig. 2L




Fig. 2K

PLATE SUPPLY TRANSFORMERS (COMMERCIAL DUTY) For 50-60 Cycle Supply

These plate transformers are rated in D.C. voltages from a two section filter, including the voltage drop through the rectifier tubes. Designed for continuous duty at full ratings specified and may be safely exceeded by as much as 20% in amateur or intermittent service.

Type No.	List Price	Sec. A.C. Load Volts	D.C. Volts†	D.C. M.A.	Pri. Volts	Pri. V.A.	Mtg. Fig.	Dimensions			Wt. Lbs.
								W.	D.	H.	
T-62P80-	\$ 7.75	725-0-725	525	150	110	125	2L	4 1/2	4 1/8	6 1/4	11 1/2
T-70P41-	9.00	725-0-725	525	250	110	210	2L	4 1/2	5	6 1/4	15 1/2
T-53P03-	5.50	465-0-465	400	150	115	90	2G	3 3/8	4 1/4	4 3/8	7 1/2
T-84P60	7.75	515-0-515	400‡	250	115	190	2G	3 1/4	4 3/4	5	11 1/2
T-62P57-	9.00	750-0-750	625	200	115	180	3C	4 1/2	3 3/8	6 1/4	12 1/2
T-54P48-	6.75	800-0-800	680	150	115	130	3C	4 1/2	3 1/2	6 1/4	10 3/4
T-71P27-	10.00	800-0-800	600	250	110	240	2L	4 1/2	4 1/8	6 1/4	14 3/4
T-64P12-	16.50	980-0-980	750	350	110	400	2M	6 3/4	6 3/8	8	32 1/2
T-64P11-*	21.00	1600-0-1600 1290-0-1290	1250 1000	280	110	520	2M	6 3/4	7 1/2	8	36 3/4
T-70P33-*	30.00	1620-0-1620 1330-0-1330	1250 1000	500	110	900	2S	6 3/4	6 1/2	11	43
T-54P89-	18.50	1270-0-1270	1000	400	115	600	2M	6 3/4	6 1/8	8	33
T-62P82-	32.00	1335-0-1335	1000	500	110	750	2S	6 3/4	6 1/4	11	42 1/2
T-73P51-*	45.00	2275-0-2275 1950-0-1950	1750 1500	500	110	1300	2S	6 3/4	7 1/2	11	61 1/2
T-62P83-	32.00	2350-0-2350	2000	250	110-220†	740	2S	6 3/4	6 1/2	11	42 1/2
T-62P84-	50.00	2420-0-2420	2000	500	110-220†	1500	2S	6 3/4	8 1/4	11	80 1/2
T-62P85-	60.00	3630-0-3630	3000	380	110-220†	1750	2S	6 3/4	10	11	87

‡Bias tap at 30 volts. *Variation in secondary voltages obtained by changing primary taps. †Primary for 110 or 220 volts, or 220 volt tap may be used on 110 volts to reduce sec. voltage 50%. †D. C. volts measured out of filter with choke input. If transformer is used with bridge rectifier (choke input) current should be reduced to 50% of this rating.



Fig. 2M




Fig. 2S

FILAMENT TRANSFORMERS



THORDARSON FILAMENT TRANSFORMERS give improved voltage regulation and minimize heat rise. Many types are furnished with primary taps to compensate for line voltage or voltage drop in filament leads. All units are rated for continuous operation at full load. All primaries 115 volts 50-60 cycles. Those marked with * have primary taps of 105, 110 and 115 volts.

One Secondary

Type No.	List Price	Sec. Volts	Sec. Amps.	Volts Insulation	Mtg. Fig.	Dimensions			Wt. Lbs.
						W.	D.	H.	
T-50F61	\$1.50	2.5 Ct.	3.5	1600	2B	2	1 1/8	2 3/8	1
T-54F69-	1.75	2.5 Ct.	5.0	1600	2E	2	2	2 3/8	1 1/2
T-19F88	1.75	2.5 Ct.	5.25	2000	3C	2	2	2 3/8	1 1/2
T-19F89	2.25	2.5 Ct.	10	2000	3C	2 1/2	2	3	2
T-54F55-	2.50	2.5 Ct.	10	1600	2B	3	2 3/8	3 3/8	3
T-19F90	3.00	2.5 Ct.	10	7500	3C	2 3/8	2 1/2	3 3/8	2 1/2
T-64F33*	4.50	2.5 Ct.	10	7500	2N	3 3/8	3 3/8	4	4 1/2
T-63F99	3.25	5 Ct.	4	1600	2D	3	2 1/2	3 3/8	2 1/2
T-19F91	2.25	5.25 Ct.	4	2000	3C	2 1/2	2 3/8	3 3/8	2 1/2
T-19F92	3.25	5.25 Ct.	13	2000	3C	3 3/8	2 1/2	4	4
T-74F23*	5.00	5.25 Ct.	13	1600	2D	3 3/8	3 3/8	4	4 1/2
T-74F24*	7.00	5.25 Ct.	21	1600	2D	3 3/8	3 3/8	4 3/8	5 1/2
T-19F97	2.00	6.3 Ct.	3	2000	3C	2	2	2 3/8	1 1/2
T-61F85	2.00	6.3, 5, 2.5	2.5	1600	2E	2 3/8	2	2 1/2	1 1/2
T-73F60*	3.75	6.3 Ct.	5	1600	2D	3	2 1/2	3 3/8	3 3/8
T-19F98	2.75	6.3 Ct.	6	2000	3C	2 1/2	2 3/8	3 3/8	2 3/8
T-19F99	3.50	6.3 Ct.	10	2000	3C	3 3/8	2 3/8	4	4
T-64F13*-	3.25	7.5 Ct.	2.5	1600	2D	3	2 1/2	3 3/8	2 1/2
T-19F93	2.25	7.5 Ct.	4	2000	3C	2 1/2	2 1/2	3 3/8	2 1/2
T-64F35-	4.50	7.5 Ct.	6.5	1600	2D	3 3/8	3 3/8	4	6
T-19F94	3.00	7.5 Ct.	8	2000	3C	3	2 1/2	3 3/8	4
T-92F20	4.75	7.5 Ct.	8	1600	2D	3 3/8	3 3/8	4	4 3/8
T-19F95	2.75	10 Ct.	4	2000	3C	2 3/8	2 3/8	3 3/8	2 3/8
T-19F96	3.50	10 Ct.	8	2000	3C	3	2 1/2	3 3/8	4
T-64F14*	4.75	10 Ct.	8	1600	2D	3 3/8	3 3/8	4	5
T-64F15*-	7.50	11 Ct.	10	1600	2D	4 1/4	3 3/8	4 3/8	8
T-64F19-	9.00	11 Ct.	15.5	1600	2L	4 1/2	4 1/2	6 1/2	13

Two Secondaries

T-64F21-	5.50	2.5 Ct. 5 Ct.	10 3	3000	2N	3 3/8	3 3/8	4	4 3/8
T-75F85-	5.50	5 Ct. 5 Ct.	3 3	3000	2D	3	2 1/2	3 3/8	3 3/8
T-54F66-	3.25	7.5 Ct. 7.5 Ct.	2.5 2.5	1600	2E	3	2 3/8	3 3/8	3 3/8

Three Secondaries

T-79F84	4.75	2.5 Ct. 5 Ct. 6.3 Ct.	3.5 3 3	1600	2G	3 3/8	3 3/8	4 3/8	4 3/8
T-60F94-	6.00	2.5 Ct. 2.5 Ct. 5 Ct.	3.5 14 6	1600	2G	3 3/8	3 3/8	4 3/8	5 1/2
T-85F14*-	17.50	2.5 Ct. 2.5 Ct. 2.5 Ct.	5 5 10	10,000	2Q	7 3/8	5 1/2	5 1/2	17
T-70F46-	7.75	5 Ct. 5 Ct. 5 Ct.	3 3 6	5000	2N	4	3 3/8	4	3 3/8
T-64F17*-	9.00	2.5 Ct. 7.5 Ct. 7.5 Ct.	4 4.5 6.5	1600	2N	4 1/4	3 3/8	4 3/8	8

Four Secondaries

T-64F16*-	11.50	2.5 Ct. 7.5 Ct. 10 Ct. 10 Ct.	5 1.25 3.25 6.5	1600	2N	4 1/2	4 1/2	6 1/2	13 1/2
-----------	-------	--	--------------------------	------	----	-------	-------	-------	--------

C. H. T. FILAMENT TRANSFORMERS ARE LISTED ON PAGE 17



TRANSMITTER INPUT AND FILTER CHOKES

FILTER CHOKES

All Thornden filter chokes are listed at measured inductance at rated currents. From the smallest to the largest, all are designed and produced with characteristic Thornden thoroughness. All are adequately insulated for recommended service.

INPUT OR SWINGING CHOKES

Type No.	List Price	Cap. D.C. M.A.	Inductance Henries	D.C. Res. Ohms	Volts Insulation	Mtg. Fig.	Dimensions			Wt. Lbs.
							W.	D.	H.	
T-19C35	\$ 4.75	200	5-20	130	3000	2D	3½	3¾	4¼	5½
T-19C36	6.50	300	5-20	105	3000	2D	3½	3¾	4¾	9¾
T-19C37	9.00	400	5-20	90	4000	2J	4½	5½	6½	19
T-19C38	11.50	500	5-20	75	4000	2J	5½	6	7½	26
T-64C05-	4.25	150	10-30	200	2000	2D	3½	3¾	4¾	5
T-63C15-	8.50	280	12-38	156	5000	2J	4	4¼	6¼	11¾
T-64C06-	12.00	380	10-19	93	5000	2J	4¾	5	6¾	18¾
T-63C16-	14.00	500	8-17	70	5000	2J	5	5½	6¾	22¾
T-72C16-	16.00	650	8-22	55	5000	2K	6¾	6¾	7¾	27¾




Fig. 2K



Fig. 2J




Fig. 2E

SMOOTHING CHOKES

T-19C42	4.75	200	12	130	3000	2D	3½	3¾	4¼	5½
T-19C43	6.50	300	12	105	3000	2D	3½	3¾	4¾	9¾
T-19C44	9.00	400	12	90	4000	2J	4½	5½	6½	19
T-19C45	11.50	500	12	75	4000	2J	5½	6	7½	26
T-64C09-	5.50	150	19.7	275	2000	2D	3½	4	4½	7
T-64C08-	10.00	280	23.6	190	5000	2J	4½	4½	6¼	14
T-64C07-	16.00	380	20	160	5000	2K	6	6¾	7¾	25
T-64C10-	17.00	500	16.5	110	5000	2K	6¾	6¾	7¾	27¾
T-72C15-	24.00	650	17	70	5000	2K	6¾	8½	7¾	40¾




Fig. 2N

EXCITER LAMP TRANSFORMERS

Type No.	List Price	Pri. Volts	Secondary		Mtg. Fig.	Dimensions			Wt. Lbs.
			Volts	Amps.		W.	D.	H.	
T-64F37-	\$5.00	110/115/120	10	7.5	2E	3½	3½	4	5¾
T-64F38-	4.00	110/115/120	8.5	4	2E	3	2¾	3¾	3¾




Fig. 2L

TRANSCEIVER TRANSFORMERS

Smallest practical size—Light weight—Easy to mount—Efficient

Type No.	List Price		Ohms Imped.		Max. D.C. Pri.	Max. Power Watts	Mtg. Fig.	Dimensions			Wt. Lbs.
			Pri.	Sec.				W.	D.	H.	
T-72A59	\$1.65	Pl. and S. B. micro. to grid	5,000 200	100,000	10	5	2B	1½	1½	2	¾
T-72S58	1.65	Pent. Pl. to low or high imp. phones or osc.	10,000	2,000 50	80	5	2B	1½	1½	2	¾



Fig. 3C

OTHER FILTER CHOKES ARE LISTED ON PAGES 5 AND 18




Fig. 4E

ISOLATION TRANSFORMERS

The fast growing use of electrical therapeutic machines in medicine and surgery, of clippers, hair dryers, permanent wave machines and other electrical equipment in the barber and beauty shop industries has greatly expanded the market for isolation transformers. Their use is also indicated in amateur transmission for elimination of line noises or to keep RF out of the incoming line. Primary 105-115-125 V. 50-60 cycles; Secondary 115 V. Electrostatic shield between primary and secondary. FEATURES primary voltage adjustment without changing connections.

Type No.	List Price	Capacity V.A.	Mtg. Fig.	Dimensions			Wt. Lbs.
				W.	D.	H.	
T-18V00	\$ 9.00	100	2V	3 3/8	3 3/8	5	8
T-18V01	17.50	250	4E	5 7/8	6 1/4	6	20
T-18V02	27.50	500	4E	6 3/4	7 1/4	6 3/4	35




Fig. 2W

PRIMARY REGULATING AUTO TRANSFORMERS

For increasing or decreasing line voltage. Taps for 60, 80, 90, 100, 110, 120, and 125 volts. 50-60 cycles.

Type No.	List Price	Capacity V.A.	Mtg. Fig.	Dimensions			Wt. Lbs.
				W.	D.	H.	
T-82V11	\$12.50	500	2W	4 1/2	7	6 1/4	16 3/4
T-82V12	17.50	1000	2W	5 1/8	7 1/4	6 1/8	22 1/2
T-82V13	22.50	2000	2M	6 3/4	7 1/2	7 1/2	39 1/2

VOLTAGE CHANGER AND BOOSTER AUTO TRANSFORMERS

Input side equipped with cord and plug. Output side has standard receptacles.




Fig. 2V

Type No.	List Price			Rating Watts	Mtg. Fig.	Dimensions			Wt. Lbs.
		Primary	Secondary			W.	D.	H.	
T-26V04	\$4.50	220-250 Volts	110-125 Volts	80	2V	3 3/8	3	4 3/8	4 1/2
T-50V10	5.50	220-250 Volts	110-125 Volts	125	2V	3 3/4	3 3/4	5	5 3/4
T-40V15	6.50	220-250 Volts	110-125 Volts	175	2V	3 3/4	3 3/8	5	8
T-50V11	7.50	220-250 Volts	110-125 Volts	250	2V	3 3/4	4 3/8	5	10 1/4
T-61V07	5.00	90 or 100 Volts	115 Volts	150	2V	3 3/8	3	4 3/8	4 1/2

SIGNALING TRANSFORMERS

Listed by Underwriters' Laboratories

While designed primarily for bells, horns, gongs, and other intermittent signal duty, these transformers may be used for many additional applications. Cases are compound filled and have separately enclosed primary and secondary wiring compartments. Knockouts permit attachment of rigid or flexible conduit without exposing the wiring. Primary 115 volts, 50-60 cycles. Four secondary leads provide the following combination of output voltages—4, 8, 12, 16, 20, and 24 volts.

Type No.	List Price			Mtg. Fig.	Dimensions			Wt. Lbs.
		Intermittent Duty Rating	Constant Duty Rating		W.	D.	H.	
T-47V01	\$ 6.00	50 V. A.	35 V. A.	3V	5 3/8	4 1/2	4	6 1/4
T-47V02	9.75	100 V. A.	85 V. A.	3V	6 3/8	4 1/2	4	8
T-47V03	25.00	250 V. A.	190 V. A.	3V	7 3/8	4 1/2	4	14 1/4
T-47V04	35.00	500 V. A.	475 V. A.	3V	8 3/8	5 1/4	5 1/2	22 1/4



Fig. 3V

TRANSFORMER AND CHOKE FOR 32 VOLT D.C. SUPPLY

These units are specified for the excellent 32 volt D.C. supply presented in Thorndarson Service Guide No. 342-C.

Type No.	List Price	D.C.* Volts	Max. D.C. Amps.	Mtg. Fig.	Dimensions			Wt. Lbs.
					W.	D.	H.	
T-14R50	\$15.00	32	3	3C	4 1/8	4 1/2	6 3/8	18 1/4
T-14C51	8.00	Choke .18 H @ 3 A. D.C. D.C. Resistance 1.3 ohms		3C	4 1/8	3 1/2	6 1/8	13 1/4

*Tapped primary. For use with type 83 or Raytheon RX-203 tubes.



Fig. 3C



AMPLIFIERS



COMPLETE AMPLIFIERS WIRED OR FOUNDATION UNIT FORM Factory Wired and Tested

These five amplifiers have by their very popularity earned another listing in this catalog. While space limitations prevents full description, your jobber will gladly supply Bulletin SD-269A for complete details.

Type No.	List Price (less tubes)	Watts Output	Output Tubes
T-11W06-M-	\$59.25	6 watt	Push Pull 6F6
T-11W18-M-	80.90	18 watt	Push Pull 6F6
T-11W30-	93.25	30 watt	P.P. Parallel 2A3
T-10W61-	155.00*	60 watt	P.P. Parallel 6L6
T-10W11	160.00*	10 watt	Tru-Fidelity 2A3

FOUNDATION UNITS AND ACCESSORIES

The above amplifiers are also available in "Build-it-Yourself" Foundation Units. Includes punched chassis with sockets mounted, photos, diagrams, instructions and list of nationally distributed component parts.

Type No.	List Price	Description
T-10K20	\$5.50	Metal Screen Cover for T-10W60 and T-10W11 (less handles)
T-10K21	4.75	Metal Screen Cover for power supply T-10W60 and T-10W11 (less handles)
T-10K50	1.90 pair	Chromium Plated Handles for T-10K20 and T-10K21
T-75K06-M-	4.50	Foundation Unit for T-11W06-M
T-75K18-M-	6.00	Foundation Unit for T-11W18-M
T-75K30-	8.00	Foundation Unit for T-11W30
T-10K60-	12.00	Foundation Unit for T-10W61
T-10K10-	10.00	Foundation Unit for T-10W11

*Less covers and handles




Fig. 10W61




Fig. 11W06

BUILD A THORDARSON AMPLIFIER


Many P.A. engineers and experimenters design as well as build amplifiers. Not a few of them have sought our recommendations on matched transformer and choke components for amplifiers of the more widely used tube combinations. Here are several suggestions for which complete circuit information appears in Thordarson Sound Amplifier Guide No. 346-C. Complete data on the following Thordarson units will be found elsewhere in this catalog.

Single Channel Pre-Amplifier	Four Channel Pre-Amplifier	8 Watt Amplifier
Tubes: 1-6F5, 1-6J7 and 1-6X5 1 T-15R04 Power Transformer 1 T-15A71 Tube to Line Transformer 2 T-13C26 Chokes	Tubes: 4-6F5, 1-6J7 and 1-6X5 1 T-15R04 Power Transformer 1 T-15A71 Tube to Line Transformer 2 T-13C26 Chokes	Tubes: 1-6J7, 1-6F5, 1-6L6G, 1-80 1 T-75R47 Power Transformer 1 T-57C54 Choke 1 T-17S10 Output Transformer
15 Watt Amplifier	25 Watt Amplifier	40 Watt Amplifier
Tubes: 2-6J7, 1-6C5, 2-6V6G, 1-5Z3 1 T-70R62 or T-15R06 Power Transformer 1 T-57C54 or T-15C54 First Choke 1 T-67C46 Second Choke 1 T-15A74 Input Transformer 1 T-17S11 or T-15S90 Output Transformer	Tubes: 3-6J7, 1-6C5, 2-6L6G, 1-5Z3 1 T-17R30 or T-15R07 Power Transformer 1 T-67C49 or T-15C55 First Choke 1 T-67C46 Second Choke 1 T-15A74 Input Transformer 1 T-17S12 or T-15S91 Output Transformer	Tubes: 2-6J7, 1-6F5, 1-6C5, 1-6F6, 2-6L6G, 2-5Z3 1 T-17R31 or T-15R08 Power Transformer 1 T-75C51 or T-15C56 First Choke 1 T-18C92 or T-15C53 Second Choke 1 T-67C46 Third Choke 1 T-15D85 Driver Transformer 1 T-14C70 Tone Control Choke 1 T-17S14 or T-15S92 Output Transformer
60 Watt Amplifier	120 Watt Booster Amplifier	10 Watt Tru-Fidelity Phono Amplifier
Tubes: 3-6J7, 2-6C5, 4-6L6G, 1-83 and 1-80 1 T-89R28 or T-15R08 Power Transformer 1 T-15R06 Power Transformer 1 T-75C51 or T-15C56 First Choke 1 T-68C07 or T-15C54 Second Choke 1 T-67C46 Third Choke 1 T-15A74 Input Transformer 1 T-14C70 Tone Control Choke 1 T-17S15 or T-15S93 Output Transformer	Tubes: 1-6J7, 2-6C5, 2-6F6, 4-6L6G, 2-83 and 1-80 1 T-15R01 Power Transformer 1 T-15R06 Power Transformer 1 T-15C56 First Choke 1 T-68C07 Second Choke 1 T-15A74 Input Transformer 1 T-15D88 Driver Transformer 1 T-15S94 Output Transformer 1 T-67C46 Choke 1 T-14C70 Choke	Tubes: 4-6C5, 1-6L7, 1-6H6, 2-2A3, 1-5Z3, 1-80 1 T-87R85 or T-15R05 Power Transformer 1 T-90A04 Input Transformer 1 T-15C54 Choke 1 T-74C30 Choke 1 T-67C46 Choke 1 T-18C92 Choke 1 T-74C29 or T-15C54 Filter Choke 1 T-90S13 Output Transformer

NEW AMPLIFIERS BY THORDARSON

"Built for Audio Experts by Audio Experts"

For the first time Thordarson offers amplifiers in beautiful solid walnut cabinets with controls fully illuminated and protected by a covered compartment. Models range from 8 to 60 watt output, suitable for practically every application. See and hear these new amplifiers at your distributor. Ask him for Catalog No. 600-C or write Factory direct.

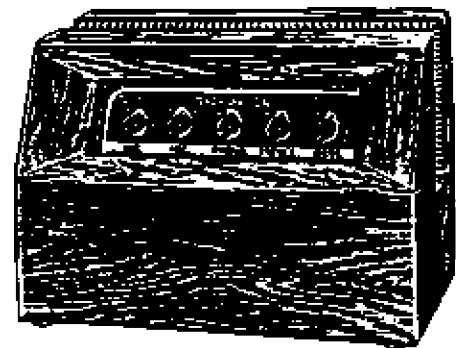

IF YOU ARE INTERESTED IN SOUND AMPLIFICATION YOU NEED THE NEW THORDARSON SOUND AMPLIFIER GUIDE - 346-C




Fig. 3P

The following pages are devoted to a presentation of the C.H.T. Series. The Thordarson engineering and manufacturing divisions have gone to utmost lengths to make this series unexcelled from every angle of appearance, dependability, uniformity, accuracy and adaptability. For the first time in transformer history a definite pattern of case design has been followed from the smallest audio to the largest plate transformer. Each unit has the complete protection of compound filled cases against varying climatic conditions. Mounting templates and complete instructions are furnished to insure a quick, efficient and permanent installation.

MULTI-VOLT PLATE TRANSFORMERS

The value of Thordarson's experience in manufacturing quality transformers is best demonstrated by the C. H. T. Multi-Volt Transformer. These units, engineered for continuous operation, provide extreme flexibility, excellent regulation and quiet operation. The new 3P mounting, used on the larger types consists of two heavy cast cases for full shielding of the coil. Moisture proof compound is used to complete coil protection.



Fig. 3Q

Type No.	List Price	Sec. A.C. Load Volts	D.C. Volts	D.C. M.A.	Pri. Volts	Pri. Watts	Mtg. Fig.	Dimensions			Wt. Lbs.
								W.	D.	H.	
T-15P11	\$12.50	665/665 535/535	500 400	200	115-230	135	3K	5 1/8	5 1/2	5 3/8	15 3/4
T-15P12	15.00	835/835 655/655	650 500	200	115-230	165	3K	5 1/8	5 1/2	6 3/4	19 1/4
T-15P13	20.00	945/945 770/770	750 600	300	115-230	275	3Q	5 1/8	7 3/4	7 1/4	31 3/4
T-15P14	25.00	1225/1225 945/945	1000 750	300	115-230	355	3Q	6 3/8	8 3/4	8 3/4	41
T-15P15	30.00	1450/1450 1190/1190	1250 1000	300	115-230	445	3Q	7	9	8	51 1/4
T-15P16	45.00	1540/1540 1255/1255	1250 1000	500	115-230	750	3P	6 3/8	11 1/4	9	81
T-15P17	32.50	1815/1815 1535/1535	1500 1250	300	115-230	530	3Q	7	9	8	55
T-15P18	60.00	2130/2130 1845/1845	1750 1500	500	115-230	1020	3P	6 3/8	12 1/2	9	96
T-15P19	50.00	2950/2950 2365/2365	2500 2000	300	115-230	900	3P	6 3/8	11 3/4	9	85
T-15P20	85.00	2960/2960 2390/2390	2500 2000	650	115-230	1875	3P	7 1/2	14 3/8	9 3/8	140
T-15P21	80.00	3440/3440 2980/2980 2340/2340 1815/1815	3000 2500 2000 1500	500	115-230	1690	3P	7 1/2	13 3/8	9 3/8	129
T-15P22	50.00	2070/2070 1785/1785 1495/1495 1210/1210	1750 1500 1250 1000	300	115-230	625	3P	6 3/8	10 3/4	9	76



Fig. 3K




Fig. 3N



Fig. 3X

MULTI-VOLT BIAS TRANSFORMERS

Rectifier plate and filament terminals on recessed base. Six secondary taps are brought out to plug-in jacks for convenient change of voltage.

Type No.	List Price	Pri. Volts	D. C. Volts	M.A.	Filament		Mtg. Fig.	Dimensions			Wt. Lbs.
					Volts	Amps.		W.	D.	H.	
T-15R60	\$9.50	115	150; 135; 120; 110; 100; 90	200	5	3	3N	4	4 1/2	4 1/2	6 3/4
T-15R61	10.50	115	275; 250; 225; 200; 175; 150	200	5	3	3N	4	4 1/2	4 1/2	8 1/4
T-15R62	12.50	115	500; 450; 400; 350; 300; 275	200	5	3	3N	5 1/8	5 1/2	5 3/8	15 3/4



Fig. 3W



C. H. T.—Filament and Power Transformers



MULTI-VOLT FILAMENT TRANSFORMERS

Terminals are brought out to rugged solder lugs on a recessed base. This permits of mounting on chassis with one hole for lead wiring. Side knock-out holes for bread board wiring.

Tapped Secondary Transformers

Type No.	List Price	Primary Volts	Secondary Volts	Amps.	Volts Insulation	Mtg. Fig.	Dimensions			Wt. Lbs.
							W.	D.	H.	
T-11F50	\$7.50	105-115	7.5 tap at 6.3, 5* and 2.5 Ct.	6.5	1600	3K	4	4½	4¾	6¼
T-11F51	8.00	105-115	10 tap at 7.5 and 6.3 Ct.	8	1600	3K	4	4½	4¾	7¼
T-11F52	9.00	105-115	11 tap at 10 and 7.5 Ct.	10	1600	3K	5¼	5½	6	13¼

*Not center tapped

Multiple Secondary Transformers

T-11F56	6.50	105-115	No. 1 = 6.3 Ct. No. 2 = 2.5 Ct. No. 3 = 5 Ct.	3 3.5 3	1600	3K	4	4½	3¾	6
T-11F57	12.50	105-115	No. 1 = 10 Ct. No. 2 = 10 Ct. No. 3 = 6.3 Ct., No. 4 = 5 Ct.	8 4 3	1600	3K	5¼	5½	6¾	15
T-11F58	11.00	105-115	No. 1 = 7.5 Ct., No. 2 = 7.5 Ct. No. 3 = 6.3 Ct., No. 4 = 5 Ct.	6.5, 3.25 3	1600	3K	5¼	5½	6	13¼

Single Secondary Transformers

T-11F53	6.00	105-115	2.5 Ct.	10	7,500	3K	4	4½	4¾	5¾
T-11F54	12.00	105-115	5 Ct.	20	10,000	3K	5¼	5½	6¾	16¼
T-11F55	10.00	105-115	5.25 Ct.	22	1,600	3K	5¼	5½	6	14

MULTI-VOLT POWER TRANSFORMERS

Combination plate and filament transformers for such tubes of medium power as 6L6, 607, T-20, RK-23, RK-39, etc. Types T-15R04 to T-15R08 are specified in new amplifiers fully described in Thordarson No. 346-C Sound Amplifier Guide. Primary 115 V. 50-60 cycles.

Type No.	List Price	Secondaries								Mtg. Fig.	Dimensions			Wt. Lbs.		
		No. 1		No. 2		No. 3		No. 4			W.	D.	H.			
T-15R00	\$10.50	Volts Ct.	M.A.	Volts (Rect. Fil.)	Amp.	Volts Ct.	Amp.	Volts Ct.	Amp.	Volts Ct.	Amp.	3K	5¼	5½	6	15
T-15R01	15.00	1000	150	5	3	7.5 tap 6.3	5	6.3	6	3K	5¼	5½	6	24½		
T-15R02	13.25	1500	200	2.5	10	7.5 tap 6.3	3	3K	5¼	5½	6	17				
T-15R03	13.75	800	200	2.5	4	6.3	3	5	3	3K	5¼	5½	6	19		
T-15R04	4.75	510	25	6.3	2.1	3M	2¾	3	3¾	3						
T-15R05	10.50	680	135	5	3	6.3	2	6.3	2.25	3K	4	4½	5½	10		
		77 Bias tap	5	2	2.5	or	5									
T-15R06	9.75	725	175	5	3	6.3	2.25	3K	4	4½	5½	12				
T-15R07	10.50	760	280	5	3	6.3	3.5	3K	4	4½	5½	11				
T-15R08	13.75	900	325	5	6	6.3	4.25	3K	5¼	5½	5¾	22				

TELEVISION TRANSFORMERS

Secondary voltages measured to ground. Electrostatically shielded.

Type No.	List Price	Kinescope Tubes	Pri. Volts	Secondary				Volts Insulation	Mtg. Fig.	Dimensions			Wt. Lbs.
				W.	D.	H.							
T-16R50	\$16.00	1801	115	No. 1—2.5 V. @ 1.75 A. for RCA-879 No. 2—3000/2000 V. D.C. @ 3 M.A.				7,500	3X	5¼	5½	6½	14
T-16R51	18.50	1800	115	No. 1—2.5 V. @ 5 A. for RCA-878 No. 2—6000/4500/3000 V. D.C. @ 5 M.A.				10,000	3X	5¼	5½	7	16½
T-16F55	11.00	1800 1801	105/115	No. 1—2.5 V. @ 2.1 A.				10,000	3X	4¼	4½	5¾	7¾

HORIZONTAL OUTPUT TRANSFORMER

Type No.	List Price	Overall Ratio	Application	Mtg. Fig.	Dimensions			Wt. Lbs.
					W.	D.	H.	
T-16S58	\$16.00	5:1	To couple output of horizontal deflecting circuit (6F6G etc.) to horizontal deflecting yoke. Designed to pass a 13,200 cycle saw tooth voltage.	3W	2	2	3¼	1¾

OTHER POWER TRANSFORMERS ARE LISTED ON PAGES 3 AND 4

OTHER FILAMENT TRANSFORMERS ARE LISTED ON PAGE 12



INPUT AND SMOOTHING CHOKES

Companion units to the C. H. T. Multi-Volt Plate Transformers, these chokes are accurately rated and the inductance shown is obtained with full rated D.C. applied. Most commercial choke ratings are obtained by tests not comparable to operating values. Thoradson test methods give the ACTUAL inductance as obtained in filter circuits.



Fig. 3L

C. H. T. Input Chokes

Type No.	List Price	Inductance Henries	Current M.A.	Volts Insulation	D.C. Res.	Mtg. Fig.	Dimensions			Wt. Lbs.
							W.	D.	H.	
T-15C36	\$ 8.00	5-25	200-20	4,000	105	3L	4	4½	4½	10
T-15C37	10.00	5-25	300-30	4,000	78	3L	5½	5½	6¾	22
T-15C38	12.00	5-25	400-30	4,000	95	3L	5½	5½	6¾	24
T-15C39	19.00	5-25	500-30	10,000	86	3L	5½	7¼	8¼	38½
T-15C41	23.00	5-25	650-50	10,000	46	3L	7	7½	8	51




Fig. 3M

C. H. T. Smoothing Chokes

T-15C45	\$ 8.00	12	200	4,000	105	3L	4	4½	4½	10
T-15C46	10.00	12	300	4,000	78	3L	5½	5½	6¾	22
T-15C47	12.00	12	400	4,000	95	3L	5½	5½	6¾	24
T-15C48	19.00	12	500	10,000	86	3L	5½	7¼	8¼	38½
T-15C50	23.00	15	650	10,000	46	3L	7	7½	8	51
T-15C53*	5.50	12 Par. 50 Series	100 50	1,600	272 1090	3L	2¾	3	3½	3¾
T-15C54*	5.50	8 Par. 32 Series	150 75	1,600	184 735	3L	2¾	3	3½	3¾
T-15C55*	7.00	2 Par. 8 Series	500 250	1,600	32½ 130	3L	4	4½	4¾	7¾
T-15C56*	9.00	2 Par. 8 Series	700 350	1,600	27 107	3L	4	4½	4¾	9¾

*These types have two windings each. The first line of description applies when the windings are connected in parallel, the second for series connection.



Fig. 3G

AUDIO COUPLING TRANSFORMERS

Ultra modern design, balanced windings, hum bucking coil construction and moisture-proof compound-filled cases. Frequency response variation ± 1% db 60 to 8,000 C. P. S.

Low Impedance Source to Grid

Type No.	List Price	Primary Ohms	Secondary Ohms	Max. D.C. per side (M.A.)	Max. D.C. unbalance (M.A.)	Max. Sig. Level (db)	Mtg. Fig.	Dimensions			Wt. Lbs.
								W.	D.	H.	
T-15A66	\$7.25	500, 333, 250 200, 125, 50	60,000/15,000 Single Grid	100	2.5	+10	3M	2¾	3	3½	2¼
T-15A67	8.00	500, 333, 250 200, 125, 50	120,000/30,000 P. P. Grids	100	2.5	+20	3M	2¾	3	3½	2¼
T-15A68	7.25	60, 38, 30, 22 15, 10, 5.5, 2.5	60,000/15,000 Single Grid	100	2.5	0	3M	2¾	3	3½	2¼

Low Impedance Source to Line or Mixer

T-15A69	6.25	500, 333, 250 200, 125, 50	500, 333, 250 200, 125, 50	100	2.5	+20	3M	2¾	3	3½	2
T-15A70	6.25	60, 38, 30, 22 15, 10, 5.5, 2.5	500, 333, 250 200, 125, 50	100	2.5	+20	3M	2¾	3	3½	2

Tube to Line (Low Level)

T-15A71	7.25	20,000/5,000 Single Plate	500, 333, 250 200, 125, 50	8	8	+15	3M	2¾	3	3½	1¾
T-15A72	7.25	20,000/5,000 P.P. Plates	500, 333, 250 200, 125, 50	10	0	+20	3M	2¾	3	3½	1¾

Interstage Coupling Transformers (Class A)

T-15A73	5.00	10,000/2,500 Single Plate	40,000/10,000 Single Grid.	0	0	+15	3M	2¾	3	3½	2¼
T-15A74	5.75	10,000/2,500 Single Plate	40,000/10,000 P.P. Grids	0	0	+15	3M	2¾	3	3½	2¼
T-15A75	6.25	20,000/5,000 P.P. Plates	45,000/11,250 P.P. Grids	10	0	+20	3M	2¾	3	3½	2¼

MULTIPLE-TAP LINE TO GRID TRANSFORMERS

T-15A65	10.50	500, 333, 250, 200, 125, 50	60,000/12,500 P.P. Cl. A 845				3K	4	4½	4¾	8
T-15D87	11.00	500, 333, 250, 200, 125, 50	7220 P.P. Cl. AB 845				3K	4	4½	4¾	8



Fig. 3H



Fig. 3Q

OTHER FILTER CHOKES ARE LISTED ON PAGES 5 AND 13 AND OTHER AUDIO COUPLING TRANSFORMERS ON PAGES 9 AND 23.



C. H. T. — TRANSMITTER TRANSFORMERS



MULTI-MATCH MODULATION TRANSFORMERS

Plug-in-Jack Terminal Board, the only Modulation Transformer built with this unique feature.

Enables quick and accurate matching of tube loads without soldering. The experimenter is thus assured of peak transformer performance while testing new tubes or circuit changes. See pages 20 and 21 for complete table of Driver and Modulator combinations for all transmitting tubes.

Type No.	List Price	Cap. Watts	Pri. M.A. Per Side	Sec. M.A.		Mtg. Fig.	Dimensions			Wt. Lbs.
				Series	Par.		W.	D.	H.	
T-11M74	\$9.00	40	100	80	160	3G	4	4½	4¾	7¾
T-11M75	12.50	75	145	145	290	3G	4	4½	4¾	9
T-11M76	19.50	125	210	160	320	3G	5½	5½	6	18
T-11M77	30.00	300	250	250	500	3G	6	7½	7½	30
T-11M78	60.00	500	320	320	640	3G	7	8¾	7½	51

MULTI-MATCH DRIVER TRANSFORMERS

Plug-in Connectors and recessed sub-base lugs permit single hole sub-panel wiring. See Table on pages 20 and 21.

Type No.	List Price	Cap. Watts	Max. Pri. M.A. Per Side	Ratio Pri. to ½ Sec.	Mtg. Fig.	Dimensions			Wt. Lbs.
						W.	D.	H.	
T-15D76*	\$8.25	15	60	1:1, 1.2:1, 1.4:1, 1.6:1, 1.8:1	3H	4	4½	4¾	7¾
T-15D77*	8.25	15	60	2:1, 2.2:1, 2.4:1, 2.6:1, 2.8:1	3H	4	4½	4¾	6
T-15D78*	8.25	15	60	3:1, 3.2:1, 3.4:1, 3.6:1, 3.8:1	2H	4	4½	4¾	6
T-15D79*	8.25	15	60	4:1, 4.5:1, 5:1, 5.5:1, 6:1	3H	4	4½	4¾	6
T-15D80†	11.50	30	120	1:1, 1.25:1, 1.5:1, 1.75:1, 2:1	3H	4	4½	4¾	8¾
T-15D81†	11.50	30	120	2.25:1, 2.5:1, 2.75:1, 3:1, 3.25:1	3H	4	4½	4¾	8
T-15D82‡	8.25	15		1:3.15, 1:2.75, 1:2.5, 1:2.25, 1:2, 1:1.75, 1:1.4, 1:1.25, 1:1.85, 1:1.75	3H	4	4½	4¾	5¾
T-15D83‡	11.50	30		1:3.15, 1:2.75, 1:2.5, 1:2.25, 1:2, 1:1.75, 1:1.4, 1:1.25, 1:1.85, 1:1.75	3H	4	4½	4¾	8¾
T-15D84§	11.50	30	80	1.5:1, 2:1, 2.5:1, 3:1, 3.5:1	3H	4	4½	4¾	8¾

*P.P. 45's or 2A3's. †P.P. Par. 2A3's. ‡Primary for 500 ohm line. §P.P. 6L6's with inverse feedback.

DRIVER TRANSFORMERS (For Specific Applications)

Type No.	List Price	Driver Tubes	Output Tubes	Class	Ratio Pri. to ½ Sec.	Pri. M.A.	Mtg. Fig.	Dimensions			Wt. Lbs.
								W.	D.	H.	
T-15D85*	\$7.50	Sgl. 6F6, 42, 2A5 Triode	P.P. 6L6-40W P.P. 6L6-60W	AB ₁	1.4:1, 1.3:1 1.2:1	40	3M	2¾	3	3½	2½
T-15D86*	7.50	P.P. 6F6, 42, 2A5 Triodes	P.P. Par. 6L6 120 W.	AB ₁	2.6:1	32	3M	2¾	3	3½	1¾
T-18D19	18.00	P.P. 845	P.P. 849, 204A	B	5:1	100	3Q	5½	5½	7	18½

*With humbucking coil construction.

MULTIPLE-TAP OUTPUT TRANSFORMERS

Designed especially for amplifiers featured in Thoradson No. 246-C Sound Guide. Exceptional adaptability and frequency response will dictate their use in other quality sound systems.

Type No.	List Price	Tube Type	Class	Ohm Impedance		Pri. M.A. Per Side	Max. Watts	Mtg. Fig.	Dimensions			Wt. Lbs.
				Pri.	Sec.				W.	D.	H.	
T-15S90*	\$9.25	2-6V6 P.P. 2-6L6 P.P. 2-2A3 P.P. (self bias)	AB ₁	8000	2/3/4/6	70	15	3H	4	4½	4¾	7¾
			AB ₁	5000	8/16/125							
			AB	5000	250/500							
T-15S91*	11.50	2-6L6 P.P. (300 V. Pl. & Sc.) 2-2A3 P.P. (fixed bias)	AB	4300	Same	95	25	3H	4	4½	4¾	8
			AB	3000	as above							
T-15S92*	13.75	2-6L6 P.P. 2-6L6 P.P.	AB ₁	6600	Same	90	40	3H	4	4½	5½	8¾
			AB ₂	5500	as above							
T-15S93*	15.00	4-6L6 P.P. Par. 2-6L6 P.P.	AB ₁	3300	Same	155	60	3H	4	4½	5½	15¾
			AB ₂	3800	as above							
T-15S94*	17.50	4-6L6 P.P. Par.	AB ₂	1900	500/250/166 125/100/84	230	120	3H	5½	5½	5¾	18

*Tertiary winding to give a feedback voltage 10% of full primary.

MULTIPLE-TAP LINE TO VOICE COIL TRANSFORMERS

T-15S96	11.00	Line to Voice Coil	1000/500	50/24/16/ 8/6/4/3/2	25	3H	4	4½	4	7¾
T-15S97	14.50	Line to Voice Coil	1000/500	50/24/16/ 8/6/4/3/2	60	3H	4	4½	4	9

SEE PAGE 10 FOR OTHER MODULATION AND PAGE 7 FOR OTHER DRIVER TRANSFORMERS



DRIVER AND MODULATOR COMBINATIONS



MODULATOR STAGE						DRIVER STAGE				
P-P Class B Tubes	Power Output Watts	Plate Volts	Bias Volts	Pl. to Pl. Load Ohms	Use Mod. Trans. No.	P-P Driver Tubes	Trans. Ratio, Pri. to 1/2 Sec.	Use Driver Trans. No.	Trans. for 500 Ohm Line	Ratio 500 Ohm Line to 1/2 Sec.
R.C.A. TUBES										
46	28	400	0	5,600	T-11M74 or T-19M14	*45	5:1	T-15D79 or T-19D04	T-15D82	1:2.5
46	48	600	0	9,600	T-11M76 or T-19M15	*45	5:1	T-15D79 or T-19D04	T-15D82	1:2.5
4-46's	56	400	0	2,800	T-11M75 or T-19M15	*45	5:1	T-15D79 or T-19D04	T-15D82	1:2.5
4-46's	96	600	0	4,800	T-11M76 or T-19M16	*45	5:1	T-15D79 or T-19D04	T-15D82	1:2.5
203A	200	1000	-85	6,900	T-11M77 or T-19M17	12A3	2.2:1	T-15D77 or T-19D02	T-15D82	1:1.5
203A	200	1000	-85	6,900	T-11M77 or T-19M17	**6L6	3.5:1	T-15D84	T-15D82	1:1.25
203A	260	1250	-45	9,000	T-11M77 or T-19M17	12A3	2:1	T-15D77 or T-19D02	T-15D82	1:1.5
203A	260	1250	-45	9,000	T-11M77 or T-19M17	**6L6	3.5:1	T-15D84	T-15D82	1:1.25
4-203A	400	1000	-35	3,450	T-11M78	14-2A3	2.25:1	T-15D81	T-15D82	1:1.25
4-203A	400	1000	-35	4,500	T-11M78	**6L6	3:1	T-15D84	T-15D82	1:1.25
4-203A	520	1250	-45	8,450	T-11M78	14-2A3	2:1	T-15D80	T-15D82	1:1.25
4-203A	520	1250	-45	4,500	T-11M78	**6L6	3:1	T-15D84	T-15D82	1:1.25
211	200	1000	-77	6,900	T-11M77 or T-19M17	2A3	2:1	T-15D77 or T-19D02	T-15D82	1:1.75
211	260	1250	-100	9,000	T-11M77 or T-19M17	2A3	1.8:1	T-15D76 or T-19D01	T-15D82	1:2
800	90	750	-40	6,400	T-11M78 or T-19M16	2A3	2.6:1	T-15D77 or T-19D02	T-15D82	1:1.25
800	100	1000	-55	12,500	T-11M78 or T-19M16	2A3	2.8:1	T-15D77 or T-19D02	T-15D82	1:1.25
800	100	1000	-55	12,500	T-11M76 or T-19M16	45	2.2:1	T-15D77 or T-19D02	T-15D82	1:1.2
801	45	600	-75	10,000	T-11M74 or T-19M14	2A3	2.6:1	T-15D77 or T-19D02	T-15D82	1:1.25
801	45	600	-75	10,000	T-11M74 or T-19M14	45	2:1	T-15D77 or T-19D02	T-15D82	1:2.25
801	75	750	-80	11,000	T-11M75 or T-19M16	45	1.8:1	T-15D76 or T-19D01	T-15D82	1:2.25
801	75	750	-80	11,000	T-11M75 or T-19M16	2A3	2.4:1	T-15D77 or T-19D02	T-15D82	1:1.4
905	300	1250	0	6,700	T-11M77	2A3	3.4:1	T-15D78 or T-19D03	T-15D82	1:1.25
905	370	1500	-16	8,200	T-11M78	2A3	3:1	T-15D78 or T-19D03	T-15D82	1:1.25
806	500	2000	-150	11,500	T-11M78	4-2A3	1.25:1	T-15D80	T-15D82	1:2
806	500	2000	-150	11,500	T-11M78	**6L6	1.5:1	T-15D84	T-15D82	1:2.5
808	190	1250	-15	12,700	T-11M77 or T-19M17	2A3	3.4:1	T-15D78 or T-19D03	T-15D82	1:1.25
909	60	600	0	5,200	T-11M75 or T-19M15	2A3	6:1	T-15D79 or T-19D04	T-15D82	1:1.75
909	60	600	0	5,200	T-11M75 or T-19M15	45	4:1	T-15D79 or T-19D04	T-15D82	1:1.25
809	100	750	-5	8,400	T-11M76 or T-19M16	2A3	6:1	T-15D79 or T-19D04	T-15D82	1:1.75
809	100	750	-5	8,400	T-11M76 or T-19M16	45	4:1	T-15D79 or T-19D04	T-15D82	1:1.25
830B	175	1000	-35	7,600	T-11M77 or T-19M17	2A3	3:1	T-15D78 or T-19D03	T-15D82	1:1.25
838	200	1000	0	6,900	T-11M77 or T-19M17	2A3	3.8:1	T-15D78 or T-19D03	T-15D82	1:2.5
838	260	1250	0	9,000	T-11M77 or T-19M17	2A3	3.8:1	T-15D78 or T-19D03	T-15D82	1:2.5
4-838	400	1000	0	2,450	T-11M78	4-2A3	3.25:1	T-15D81	T-15D82	1:1.75
4-838	400	1000	0	3,450	T-11M78	**6L6	3.5:1	T-15D84	T-15D82	1:1.25
4-838	520	1250	0	4,500	T-11M78	4-2A3	3.25:1	T-15D81	T-15D82	1:1.75
4-838	520	1250	0	4,500	T-11M78	**6L6	3.5:1	T-15D84	T-15D82	1:1.25
1608	50	425	-15	4,800	T-11M75 or T-19M15	*45	4:1	T-15D79 or T-19D04	T-15D82	1:1.25
TAYLOR TUBES										
T-20	60	600	-30	8,100	T-11M75 or T-19M15	*45	2.2:1	T-15D77 or T-19D02	T-15D82	1:2
T-20	70	800	-40	12,000	T-11M75 or T-19M16	*45	2:1	T-15D77 or T-19D02	T-15D82	1:2.25
TZ-20	70	800	0	12,000	T-11M75 or T-19M16	*45	3.2:1	T-15D78 or T-19D03	T-15D82	1:1.4
T-55	175	1000	-40	6,900	T-11M77 or T-19M17	2A3	2.8:1	T-15D77 or T-19D02	T-15D82	1:1.25
T-55	225	1250	-50	9,400	T-11M77 or T-19M17	2A3	2.6:1	T-15D77 or T-19D02	T-15D82	1:1.4
T-55	275	1500	-60	12,000	T-11M77	2A3	2.4:1	T-15D77 or T-19D02	T-15D82	1:1.4
T-155	Same as HD-203-A									
203-A	Same as R.C.A. 203A									
4-203A	Same as R.C.A. 4-203A									
HD-203A	300	1500	-50	9,600	T-11M77	2A3	2.6:1	T-15D77 or T-19D02	T-15D82	1:1.25
HD-203A	300	1750	-67.5	13,000	T-11M77	2A3	2.6:1	T-15D77 or T-19D02	T-15D82	1:1.25
HD-203A	400	1750	-67.5	10,000	T-11M78	2A3	2.2:1	T-15D77 or T-19D02	T-15D82	1:1.75
HD-203A	400	2000	-75	12,500	T-11M78	2A3	2.2:1	T-15D77 or T-19D02	T-15D82	1:1.75
HD-203A	500	2000	-75	10,000	T-11M78	2A3	2:1	T-15D77 or T-19D02	T-15D82	1:1.75
HD-203A	500	1500	-50	6,400	T-11M78	4-2A3	2:1	T-15D80	T-15D82	1:1.25
HD-203A	500	1500	-50	6,400	T-11M78	**6L6	3:1	T-15D84	T-15D82	1:1.4
HD-203A	600	1750	-67.5	7,600	T-11M78	4-2A3	1.75:1	T-15D80	T-15D82	1:1.4
HD-203A	600	1750	-67.5	7,600	T-11M78	**6L6	2.5:1	T-15D84	T-15D82	1:1.75
203B	300	1250	-45	7,900	T-11M77	12A3	1.8:1	T-15D76 or T-19D01	T-15D82	1:2
4-203B	600	1250	-45	3,900	T-11M78	14-2A3	1.75:1	T-15D80	T-15D82	1:1.4
4-203B	600	1250	-45	3,900	T-11M78	**6L6	2.5:1	T-15D84	T-15D82	1:1.75
203Z	200	1000	0	6,900	T-11M77 or T-19M17	2A3	4.5:1	T-15D79 or T-19D04	T-15D82	1:1.75
203Z	250	1100	0	6,700	T-11M77	12A3	3.8:1	T-15D78 or T-19D03	T-15D82	1:2.5
203Z	300	1250	0	7,900	T-11M77	12A3	3.8:1	T-15D78 or T-19D03	T-15D82	1:2.5
211	Same as R.C.A. 211									
T-756	100	850	-25	9,400	T-11M76 or T-19M16	2A3	3:1	T-15D78 or T-19D03	T-15D82	1:1.25
T-756	125	850	-25	7,500	T-11M76 or T-19M17	2A3	2:1	T-15D77 or T-19D02	T-15D82	1:1.75
T-814	500	2000	-150	11,500	T-11M78	4-2A3	1.25:1	T-15D80	T-15D82	1:2
T-814	500	2000	-150	11,500	T-11M78	**6L6	1.5:1	T-15D80	T-15D82	1:3.15
T-822	Same as HD-203A									
TZ-40	175	1000	0	6,800	T-11M77 or T-19M17	2A3	4:1	T-15D79 or T-19D04	T-15D82	1:2.5
TZ-40	175	1000	0	6,800	T-11M77 or T-19M17	45	2.6:1	T-15D77 or T-19D02	T-15D82	1:1.6
TZ-40	100	750	0	6,000	T-11M76 or T-19M16	2A3	4.5:1	T-15D79 or T-19D04	T-15D82	1:1.75
TZ-40	100	750	0	6,000	T-11M76 or T-19M16	45	3:1	T-15D78 or T-19D03	T-15D82	1:1.4

SEE PAGES 7 AND 19 FOR DRIVER TRANSFORMERS



DRIVER AND MODULATOR COMBINATIONS



P-P Class B Tubes	MODULATOR STAGE					DRIVER STAGE				
	Power Output Watts	Plate Volts	Bias Volts	Pl. to Pl. Load Ohms	Use Mod. Trans. No.	P-P Driver Tubes	Trans. Ratio. Pri. to 1/2 Sec.	Use Driver Trans. No.	Trans. for 500 Ohm Line	Ratio 500 Ohm Line to 1/2 Sec.
EIMAC TUBES										
35T	150	1000	-22	7,200	T-11M77 or T-19M17	2A3	2.4:1	T-15D77 or T-19D02	T-15D82	1:1.4
35T	200	1250	-30	9,600	T-11M77 or T-19M17	2A3	2.4:1	T-15D77 or T-19D02	T-15D82	1:1.4
100TH	210	1000	0	8,200	T-11M77 or T-19M17	2A3	3.4:1	T-15D78 or T-19D03	T-15D82	1:1.25
100TH	260	1250	0	7,200	T-11M77	2A3	3.6:1	T-15D78 or T-19D03	T-15D82	1:1.25
100TH	300	1500	-10	9,600	T-11M77	2A3	3.6:1	T-15D78 or T-19D03	T-15D82	1:1.25
100TH	380	2000	-20	16,000	T-11M78	2A3	3.8:1	T-15D78 or T-19D03	T-15D82	1:1.25
100TL	170	1000	-90	5,200	T-11M77 or T-19M17	**6L6	2:1	T-15D84	T-15D82	1:2
100TL	230	1250	-112	7,200	T-11M77	**6L6	1.5:1	T-15D84	T-15D82	1:2.5
100TL	270	1500	-140	9,600	T-11M77	**6L6	1.5:1	T-15D84	T-15D82	1:2.5
100TL	350	2000	-185	16,000	T-11M78	**6L6	1.5:1	T-15D84	T-15D82	1:2.5
150T	500	2000	-150	11,500	T-11M78	4-2A3	1.25:1	T-15D80	T-15D83	1:2
150T	600	2500	-195	14,000	T-11M78	4-2A3	1.25:1	T-15D80	T-15D83	1:2
150T	500	2000	-150	11,500	T-11M78	**6L6	1.5:1	T-15D84	T-15D83	1:2.5
150T	600	2500	-195	14,000	T-11M78	**6L6	1.5:1	T-15D84	T-15D83	1:2.5
250TH	300	1000	0	4,000	T-11M77	**6L6	3.8:1	T-15D84	T-15D83	1:1.25
250TH	400	1250	0	8,200	T-11M78	**6L6	3.5:1	T-15D84	T-15D83	1:1.25
250TH	500	1500	-22.5	6,400	T-11M78	**6L6	3:1	T-15D84	T-15D83	1:1.4

RAYTHEON TUBES										
RK-12	100	750	0	8,700	T-11M76 or T-19M16	2A3	6:1	T-15D79 or T-19D04	T-15D82	1:1.75
RK-18	100	1000	-50	12,000	T-11M76 or T-19M16	*45	2.4:1	T-15D77 or T-19D02	T-15D82	1:1.75
RK-18	100	1000	-50	12,000	T-11M76 or T-19M16	2A3	4:1	T-15D79 or T-19D04	T-15D82	1:1.85
RK-31	110	1000	0	13,600	T-11M76 or T-19M17	*45	4:1	T-15D79 or T-19D04	T-15D82	1:1.25
RK-31	140	1250	0	17,000	T-11M77 or T-19M17	*45	4:1	T-15D79 or T-19D04	T-15D82	1:1.25
RK-31	110	1000	0	13,600	T-11M76 or T-19M17	2A3	6:1	T-15D79 or T-19D04	T-15D82	1:1.75
RK-31	140	1250	0	17,000	T-11M77 or T-19M17	2A3	6:1	T-15D79 or T-19D04	T-15D82	1:1.75
RK-52	250	1250	0	10,000	T-11M77 or T-19M17	2A3	4:1	T-15D79 or T-19D04	T-15D82	1:1.85
RK-57	300	1250	0	6,700	T-11M77	2A3	3.4:1	T-15D78 or T-19D03	T-15D82	1:1.25
RK-57	370	1500	-16	8,200	T-11M78	2A3	3:1	T-15D78 or T-19D03	T-15D82	1:1.25
RK-58	200	1000	0	6,900	T-11M77 or T-19M17	2A3	3.8:1	T-15D78 or T-19D03	T-15D82	1:1.85
RK-58	260	1250	0	9,000	T-11M77 or T-19M17	2A3	3.8:1	T-15D78 or T-19D03	T-15D82	1:1.85

HYTRON TUBES										
HY-25	75	800	-9	9,000	T-11M75 or T-19M16	2A3	5:1	T-15D78 or T-19D04	T-15D82	1:1.75
HY-40	140	800	-28	8,800	T-11M77 or T-19M17	2A3	3.4 to 1	T-15D78 or T-19D03	T-15D82	1:1.25
HY-40	175	1000	-37.5	7,000	T-11M77 or T-19M17	2A3	3.4 to 1	T-15D78 or T-19D03	T-15D82	1:1.25
HY-57	110	800	-9	9,000	T-11M76 or T-19M17	2A3	6:1	T-15D79 or T-19D04	T-15D82	1:1.75
HY-51A	180	1000	-35	7,000	T-11M77 or T-19M17	2A3	4:1	T-15D79 or T-19D04	T-15D82	1:1.85
HY-51B	180	1000	-35	7,000	T-11M77 or T-19M17	2A3	4:1	T-15D79 or T-19D04	T-15D82	1:1.85

AMPEREX TUBES										
HF-100	260	1500	-82	12,000	T-11M77	2A3	3.2:1	T-15D78 or T-19D03	T-15D82	1:1.25
HF-100	350	1750	-62	16,000	T-11M78	2A3	2.4:1	T-15D77 or T-19D02	T-15D82	1:1.4
ZB-120	150	750	0	4,800	T-11M77 or T-19M17	2A3	4:1	T-15D79 or T-19D04	T-15D82	1:1.85
ZB-120	200	1000	0	6,900	T-11M77 or T-19M17	2A3	4:1	T-15D79 or T-19D04	T-15D82	1:1.85
ZB-120	245	1250	0	9,000	T-11M77 or T-19M17	2A3	4.5:1	T-15D79 or T-19D04	T-15D82	1:1.75
ZB-120	300	1500	-9	11,200	T-11M77	2A3	4:1	T-15D79 or T-19D04	T-15D82	1:1.85
HF-200	500	2000	-100	11,200	T-11M78	2A3	1.8:1	T-15D76 or T-19D01	T-15D82	1:1.75
HF-200	500	2500	-130	16,000	T-11M78	2A3	2:1	T-15D77 or T-19D02	T-15D82	1:1.75
HF-200	600	2500	-130	16,000	T-11M78	2A3	1.8:1	T-15D76 or T-19D01	T-15D82	1:1.75
HF-200	500	2000	-100	11,200	T-11M78	**6L6	2.5:1	T-15D84	T-15D82	1:1.75
HF-200	600	2500	-130	16,000	T-11M78	**6L6	2.5:1	T-15D84	T-15D82	1:1.75

HEINTZ & KAUFMAN GAMMATRON TUBES										
HK-54	170	1250	-35	12,500	T-11M77 or T-19M17	2A3	2.4:1	T-15D77 or T-19D02	T-15D82	1:1.4
HK-54	200	1500	-45	16,800	T-11M77 or T-19M17	2A3	2.4:1	T-15D77 or T-19D02	T-15D82	1:1.4
HK-154	200	1000	-155	7,500	T-11M77 or T-19M17	2A3	1.4:1	T-15D76 or T-19D01	T-15D82	1:2.25
HK-154	223	1250	-210	11,400	T-11M77 or T-19M17	2A3	1.2:1	T-15D76 or T-19D01	T-15D82	1:2.75
HK-254	240	1500	-40	10,000	T-11M77 or T-19M17	2A3	2:1	T-15D77 or T-19D02	T-15D82	1:1.75
HK-254	328	2000	-65	18,000	T-11M78	2A3	2:1	T-15D77 or T-19D02	T-15D82	1:1.75
HK-254	418	2500	-80	22,000	T-11M78	2A3	1.8:1	T-15D76 or T-19D01	T-15D82	1:1.75
HK-354	100	1000	-60	15,000	T-11M76 or T-19M16	2A3	2.6:1	T-15D77 or T-19D02	T-15D82	1:1.25
HK-354	220	1500	-100	18,000	T-11M77 or T-19M17	2A3	2.2:1	T-15D77 or T-19D02	T-15D82	1:1.75
HK-354	400	2000	-150	15,000	T-11M78	2A3	1.4:1	T-15D76 or T-19D01	T-15D82	1:2.25
854E	319	1500	-25	10,000	T-11M77	4-2A3	2.25:1	T-15D81	T-15D83	1:1.25
854E	472	2000	-37.5	11,000	T-11M78	4-2A3	2:1	T-15D80	T-15D83	1:1.25
354E	595	2500	-50	16,000	T-11M78	4-2A3	1.75:1	T-15D80	T-15D83	1:1.4
854F	290	1500	-15	12,000	T-11M77	4-2A3	2.75:1	T-15D81	T-15D83	1:1.85
854F	445	2000	-22.5	12,000	T-11M78	4-2A3	2.6:1	T-15D81	T-15D83	1:1.85


WESTERN ELECTRIC TUBES										
242A, 261A, 276A	Same as R.C.A. 211									

NOTE: This ratio is correct only when the tubes supplying power to the 500 ohm line are of the same type and operated under the same conditions as the driver tubes listed under "P.P. Driver Tubes." 2A3 driver tubes are operated with 300 plate volts, self biased, unless preceded by †. 45 driver tubes are operated with 275 plate volts, self biased, unless preceded by *. †2A3 driver tubes are operated with 300 plate volts, fixed bias. *45 driver tubes are operated with 250 plate volts, self biased.. **6L6's with 16.6N feed-back, 400 volts plate, 300 volts screen.




Tru-Fidelity Transformers by Thordarson have established new standards and conceptions of quality and performance since their introduction from the Thordarson laboratories two years ago. A check of the many distinctive features and performance curves below reveals a few of the reasons for the sincere acceptance of Tru-Fidelity by the most exacting and discriminating engineers.

THORDARSON *Tru-Fidelity* FEATURES

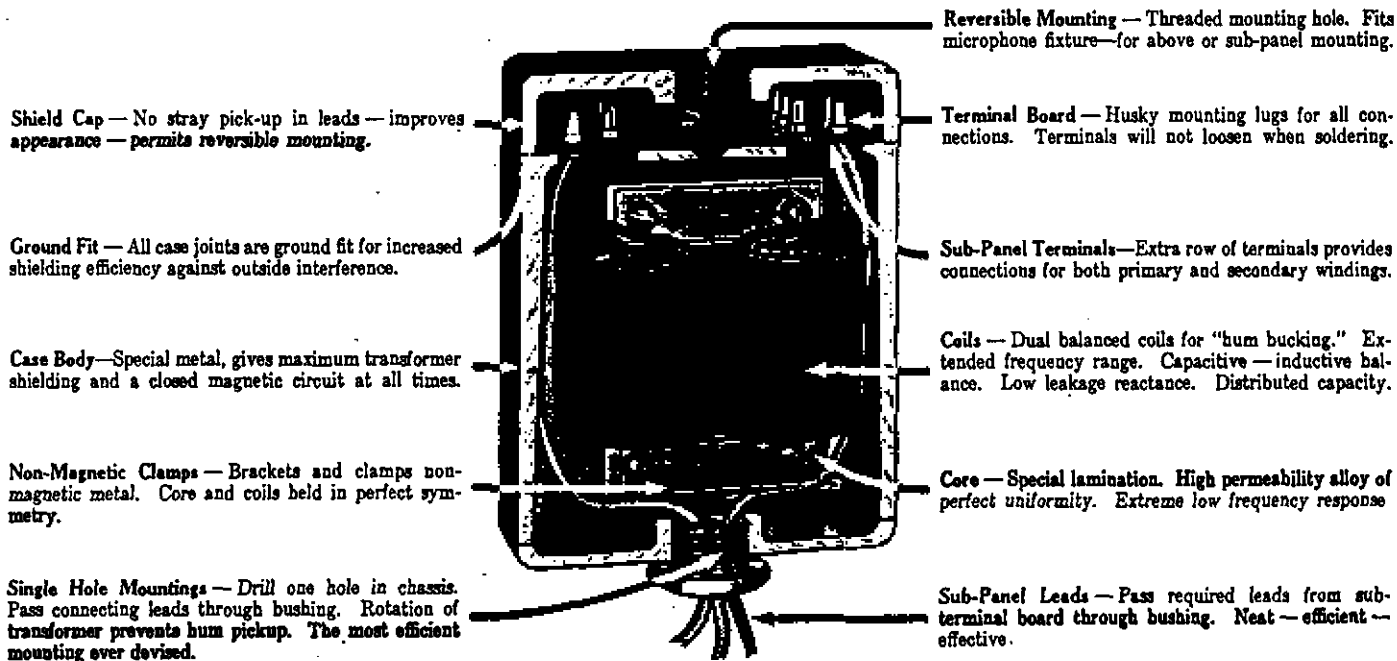


Representative Tru-Fidelity Frequency Response Curves

Actual test conditions shown in circuit diagram.

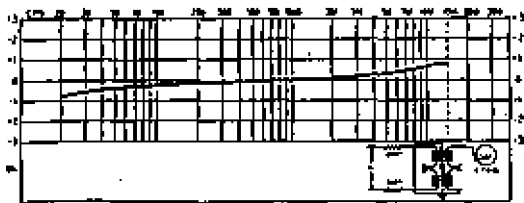

T-90A00

Maximum variation $\frac{3}{4}$ db from 20 to 15,000 c. p. s. Measurement made with signal voltage applied to primary through series resistor equal to matching impedance, core and static shield grounded.

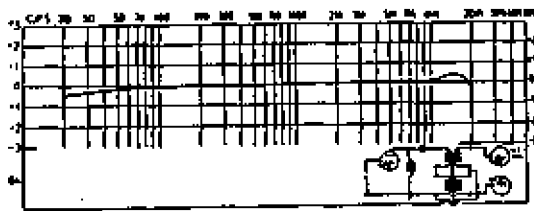

T-90A04

Maximum frequency variation $\frac{1}{2}$ db from 20 to 20,000 c. p. s. Measurement made with primary coupled to parallel fed triode and no resistance load on secondary.

T-90S07
Maximum frequency variation, $\frac{1}{2}$ db from 20 to 15,000 c. p. s. Measurement made with primary coupled to push-pull 2A3's and secondary resistance loaded.

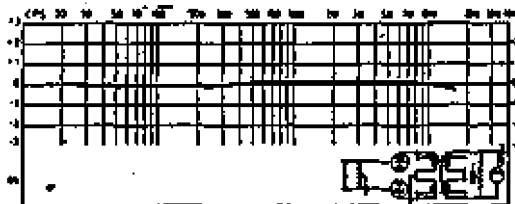




Fig. 3T





Fig. 3S

CRYSTAL MICROPHONE OR PHOTO CELL TO LINE

Type No.	List Price	Pri. Ohms	Sec. Ohms	Max. D.C. (M.A.)	Max. D.C. (M.A.)	Max. Sig. Level (db)	Mtg. Fig.	Dimensions			Wt. Lbs.
								W.	D.	H.	
T-90A06	\$18.00	250,000/62,500	500*/333/250 200*/125/50	0	0	+10	3T	3 1/8	2 1/2	4 1/8	4 3/4

PLATE TO LINE (LOW LEVEL)

T-90A02	17.50	20,000/5000 Single Plate	500*/333/250 200*/125/50	8	8	+15	3T	3 1/8	2 1/2	4 1/8	5
T-90A01	16.50	20,000/5000 Single† or P-P Plates	500*/333/250 200*/125/50	10	0	+20	3T	3 1/8	2 1/2	4 1/8	4 1/2

†With single tube use parallel feed with resistor or T-90C09.

MIXER

T-90A10	16.00	500*/333/250 200*/125/50	500*/333/250 200*/125/50	100	.5	+10	3T	3 1/8	2 1/2	4 1/8	4 3/4
---------	-------	-----------------------------	-----------------------------	-----	----	-----	----	-------	-------	-------	-------

LINE TO GRID

T-90A00	17.00	500*/333/250 200*/125/50	75,000/18,750 Single Grid	100	.5	+10	3T	3 1/8	2 1/2	4 1/8	4
T-90A11	20.00	500*/333/250 200*/125/50	150,000/37,500 P-P Grids	100	.5	+20	3T	3 1/8	2 1/2	4 1/8	4

INTERSTAGE

T-90A03	15.00	10,000/2500 Single Plate	Ratio-overall 1 to 2 40,000/10,000 Single Grid	0	0	+15	3T	3 1/8	2 1/2	4 1/8	4 3/4
T-90A04	15.00	10,000/2500 Single Plate	Ratio-overall 1 to 2 40,000/10,000 P-P Grids	0	0	+15	3T	3 1/8	2 1/2	4 1/8	4 3/4
T-90A05	16.50	20,000/5000 P-P Plates	Ratio-overall 1 to 1 1/2 45,000/11,250 P-P Grids	10	0	+20	3T	3 1/8	2 1/2	4 1/8	4 3/4

OUTPUT

T-90S07	18.00	5000/3000/1250/750 P-P 2A3, etc.	500*/333/250 200*/125/50	60	5	+32	3T	3 1/8	2 1/2	4 1/8	4 3/4
T-90S08	17.50	5000/3000/1250/750 P-P 2A3, etc.	15/10/7.5 5/3.75/1.25	60	5	+32	3T	3 1/8	2 1/2	4 1/8	4 3/4
T-90S13	20.00	5000/3000/1250/750 P-P 2A3, etc.	500*/333/250 200*/125/50 or 15/10/7.5 5/3.75/1.25	60	5	+34	3S	4	3 1/8	4 1/8	11

LINE TO VOICE COIL

T-90S12	18.00	500*/333/250 200*/125/50	15/10/7.5 5/3.75/1.25	0	0	+32	3T	3 1/8	2 1/2	4 1/8	4 3/4
---------	-------	-----------------------------	--------------------------	---	---	-----	----	-------	-------	-------	-------

PLATE REACTOR

Type No.	List	Connection	Henries	M.A.	D.C. Ohms	Mtg. Fig.	Dimensions			Wt. Lbs.
							W.	D.	H.	
T-90C09	12.50	Series Parallel	300 75	8 16	4,000 1,000	3T	3 1/8	2 1/2	4 1/8	4 3/4

*Indicates inductive and capacitive balance to center tap for use on balanced transmission lines.

OTHER AUDIO TRANSFORMERS ARE LISTED ON PAGES 6 TO 9 AND ON PAGE 19

THORDARSON

Guides and Manuals



Replacement Transformer Encyclopedia, No. 243, and Supplement, No. 243-S. Free — Complete information regarding correct choke, audio and power transformer replacements. Covers almost 6000 receivers as listed in Rider's Manuals, Volumes I to VIII. Includes data on AC, AC-DC and battery models. This is the only complete listing available and will save valuable time for the serviceman. You cannot afford to be without a copy. Ask your distributor for a copy.



Sound Amplifier Guide — No. 346, 15c — Here is a book every sound man needs. It has circuit diagrams, details and parts lists for amplifiers ranging up to 120 watts output; also information on speaker placement, microphones, and a useful db table.



Radio Service Guide—No. 342-C, 15c. A book full of practical, accurate information for the Serviceman. Gives complete schematics, photos and parts lists for building such needed equipment as a 32 volt DC power supply, an improved condenser analyzer and impedance bridge and details on two high fidelity audio amplifiers. Has charts, tables and short-cuts that are needed every day in the year. Written for Servicemen by Servicemen.

Thordarson Amplifiers—SD-269-A, Free.—Contains technical information, frequency curves, and parts lists on Thordarson Tru-Fidelity 2A3, 60-watt 6L6, 6-watt 6F6, 18-watt 6F6, 30-watt 2A3 Quality Amplifiers.

Complete Transformer Manual—No. 340, 50c — The Thordarson Transformer Manual is a complete book, containing the Radio Servicing Guide, the Replacement Transformer Encyclopedia, the Transmitter Guide, and the Sound Amplifier Guide, plus Thordarson catalogs and prices. It is bound in an attractive blue and orange cover with looseleaf arrangement, giving the user opportunity to keep the Manual up-to-date by adding the latest Thordarson releases.



Transmitter Guide — No. 344-C, 15c. Fifty-two pages of up-to-the-minute data on transmitter design and operation. Portable units, beginners transmitters, and larger rigs up to 1000 watts are fully described. Circuit diagrams, parts lists, and photographs illustrate each article.



Amplifier Catalog — No. 600-C, Free. Illustrates six models with outputs ranging from 8 to 60 watts. The 15, 25 and 40 watt models are in the new solid walnut cases with illuminated control panels which are recessed and arranged at a convenient operating angle. The catalog contains technical data with regard to each of the models, general information about the line, illustrations and prices of speaker and portable cases, etc. 12 pages.



Cathode Ray Oscilloscope — SD-266, Free. This catalog enumerates the important features of the Thordarson "Build-it-Yourself" Oscilloscope; gives complete parts lists with price and schematic diagrams.

DISTRIBUTED BY

THORDARSON ELECTRIC MFG. CO.

500 W. Huron Street

Chicago, Illinois