


BME


BROADCAST MANAGEMENT/ENGINEERING

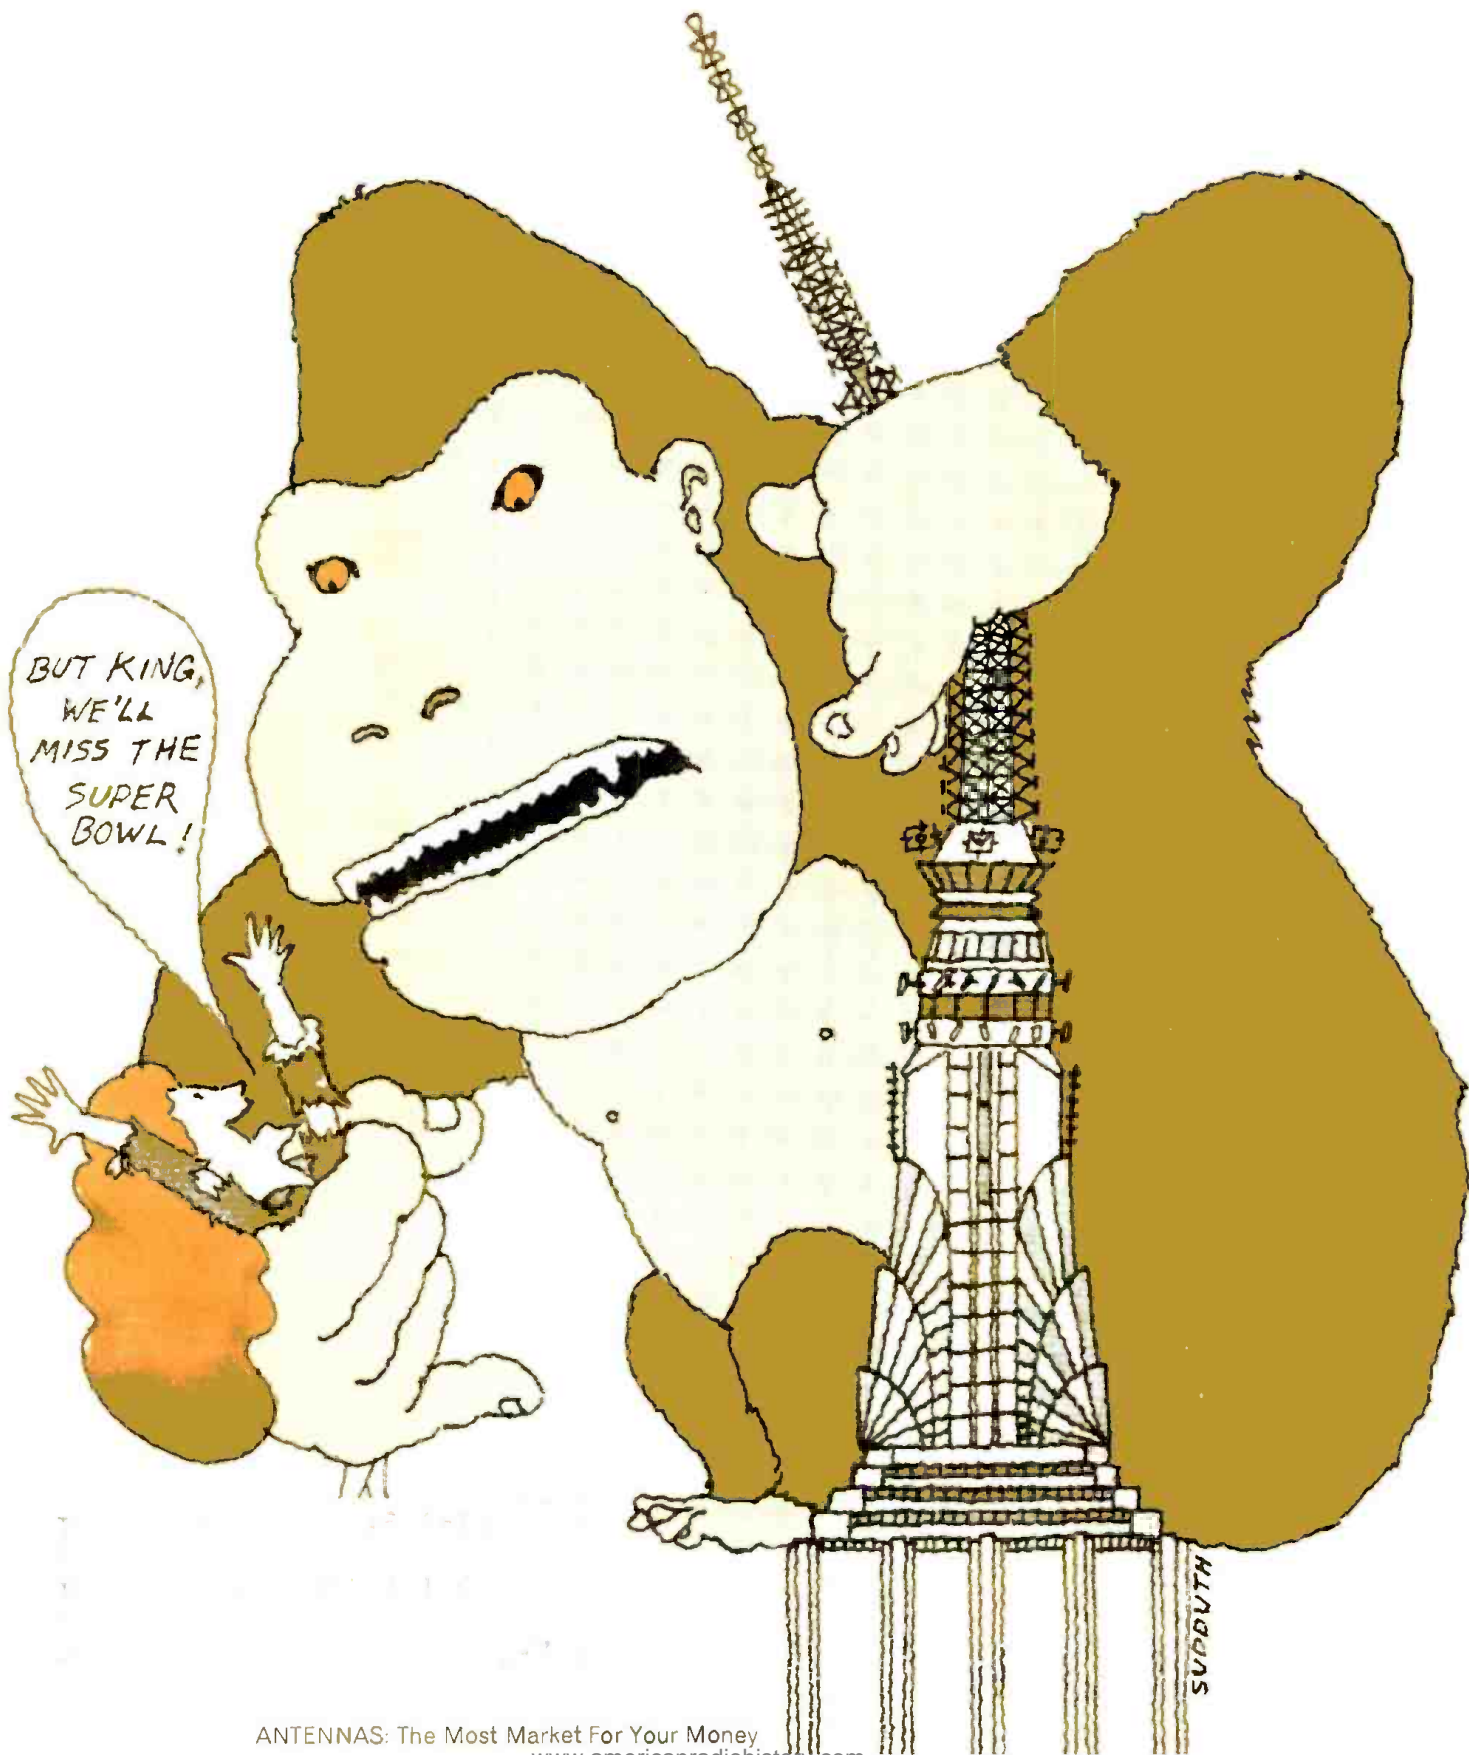

BUT KING,
WE'LL
MISS THE
SUPER
BOWL!

SUPDUTH

RIKER VIDEO

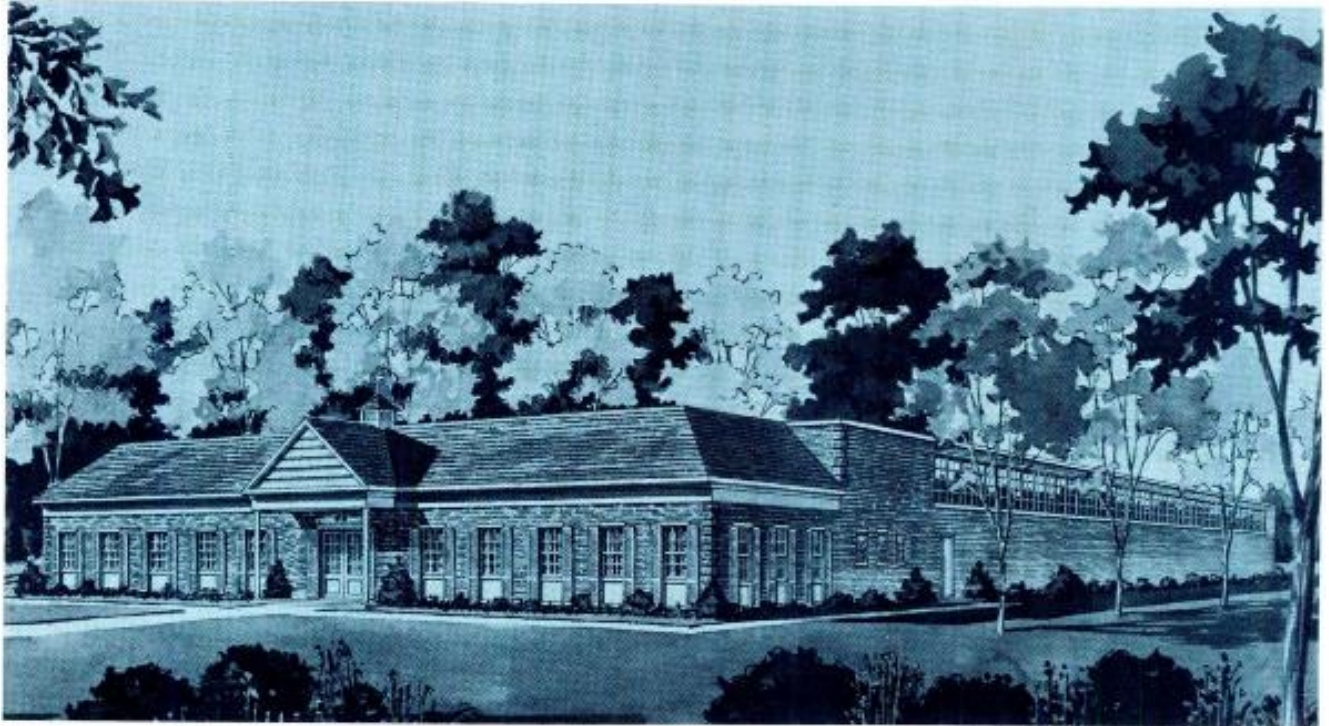

MAIN OFFICE AND PLANT

A. W. Malang, President

HEADQUARTERS

Abe Jacobowitz
National Sales Manager

T. K. Chapman
Manager of Marketing Admin.

Charles Green
Manager of Quality Assurance

CENTRAL REGION

Herbert N. Didier
Riker Video
2550 Denver Merchandise Mart
451 East 58 Avenue
Denver, Colorado 80216
(303) 534-3995
Telex 45-784

WESTERN REGION

George Ray Walker
Riker Video
7811 Le Mona Avenue
Van Nuys, California 91405
(213) 785-1005

NORTHEAST REGION

Roger C. Jakobs
Riker Video
100 Parkway Drive South
Hauppauge, New York 11787
(516) 543-5200

SOUTHEAST REGION

Lewis L. Parson
Riker Video
3127 Maple Drive, N.E.
Suite 210
Atlanta, Georgia 30305
(404) 233-2557

RIKER VIDEO Inc.

100 PARKWAY DRIVE SOUTH
HAUPPAUGE, L.I., NEW YORK 11787

TELEPHONE (516) 543-5200

TELEX 96-1356

CABLE—RIKERVERVIDEO

Circle 1 on Reader Service Card

Get Fast, Low-Cost Total Harmonic Distortion Measurements

There are several ways you can make total harmonic distortion measurements:

1. Eyeball approach using oscilloscope which is accurate enough for *some* applications.
2. Point-by-point measuring using wave analysis which is often too slow, involves needless expense for unused capability and requires you to calculate THD.
3. Plot information using spectrum analysis which is again needlessly expensive for the job... and you still must calculate THD.

OR, you can use HP 333A or 334A distortion analyzers and cut your measurement time from minutes to seconds. Simply set your level, tune, and flip the auto-nulling switch to AUTOMATIC. The instrument does the rest! It automatically and accurately completes the nulling—typically > 80 dB rejection. It will also track drifting and unstable signals!

Use the all-solid-state HP 333A or 334A where you need fast measurement of harmonic distortion of fundamentals between 5 Hz and 600 kHz—harmonics up to 3 MHz. Measure voltage up to 3 MHz.

Not only do these analyzers save you money by cutting measurement time, their initial cost is less than other measurement methods. HP 333A costs \$865 and HP 334A is \$895.

Both instruments have a high pass filter that can be switched-in to provide pure distortion measurements of signals greater than 1 kHz without 60 cycle and harmonics. With

the 334A RF detector, you can measure audio envelope distortion from 550 kHz to 65 MHz.

HP 331A and 332A Distortion Analyzers have all these features except automatic nulling and high-pass filters. (Price HP 331A, \$650; HP 332A, \$680.) HO5-332A and HO5-334A meet FCC requirements on broadcast distortion measurements. (Prices on request)

Cut your distortion measurement time with fast, low cost HP 333A or 334A. Consult your HP Instrumentation Catalog for full specifications on distortion analyzers. Order the instrument of your choice by calling your nearest HP order desk. For data sheets, write Hewlett-Packard, Palo Alto, California 94304. Europe: 1217 Meyrin-Geneva, Switzerland.

094 1

HEWLETT  PACKARD
SIGNAL ANALYZERS

Circle 2 on Reader Service Card





BROADCAST MANAGEMENT/ ENGINEERING

Editor:
JAMES A. LIPPKE

Managing Editor:
WALTER G. SALM

Assistant Editor:
ALBERT P. LAHNDT, JR.

Editorial Assistant:
HILARY E. ABRAMSON

Art Director:
KAREN WEINSTEIN

Editorial Director:
GEORGE ROSTKY

Production and Reader Service Manager:
ARLINE G. JACOBS

Circulation Director:
KEEFE G. WERNER

Sales Promotion Manager:
RHODA GLENNER

Research Manager:
IRENE CHERVIN

Marketing Services Manager:
JACK LOW

President:
RALPH E. RICHARDSON

This month's cover: Illustrator Art Sudduth's idea of an antenna problem is having King Kong shorten the mast atop New York's Empire State Building. You'll have to agree that's trouble. We don't promise you'll find a way out of this situation in our antenna section, but for some new ideas on antennas, turn to pages 44-55.

- 6 **Broadcast Industry News**
- 12 **Focus on CATV**
- 14 **Management Q&A**
Have questions on station management? Ask Si. For an answer, he'll draw on his years of experience managing successful radio stations.
- 16 **Interpreting FCC Rules & Regulations**
Protection of television stations by CATV systems—Section 74.1103
- 27 **Convention Log**
Finance, programming for ghettos, and evaluation of ITV (program and equipment) dominated 44th NAEB meet. Problems of a public broadcasting interconnection net aired. Exhibitors pushed color equipment.
- 37 **Compact Studio Camera Simplifies Colorization**
Even a wispy secretary can haul the ultra-thin cable for this two-tube camera—the studio version of the portable BC-100 which has already had a rigorous baptism of fire.
- 41 **EVR—Newest Visual Medium**
Electronic Video Recording, the CBS entry in the audio/visual area, uses photographically recorded images in a special cartridge that plays back through the antenna terminals of any TV receiver.

SPECIAL SECTION: Antennas—The Most Market for your Money

- 44 **Swamp Antenna Site Boosts Coverage**
A new transmitter, new antenna and new location in an unappetizing swampland combine to saturate the market with a widely welcomed crisp a-m signal.
 - 49 **The New Look in CATV Antennas**
No longer a poor, neglected stepchild, the CATV industry has its own particular breed of head-end antennas designed for picking up everything from fringe-distant stations to feeble radiation from communications satellites.
-
- 59 **Broadcast Equipment**
Reports on newly introduced products and equipment
 - 66 **Cross-talk**
Feedback from *BM/E* readers
 - 70 **Names in the News**
 - 74 **Literature of Interest**
Valuable data you can obtain by using the Reader Service Card between pages 70 and 71.
 - 75 **Classified Marketplace**
 - 77 **Index to Advertisers**
 - 78 **Editorial**
A Farce. Unfortunately

Mactier Publishing Corp.
820 Second Ave., New York, N.Y. 10017. 212 661-0450

Also publishers of:
BROADCAST EQUIPMENT BUYERS GUIDE
EEE
ELECTRO-PROCUREMENT



BM/E, Broadcast Management/Engineering, is published monthly by Mactier Publishing Corp. All notices pertaining to undeliverable mail or subscriptions should be addressed to 820 Second Ave., New York, N.Y. 10017.

BM/E is circulated without charge to those responsible for station operation and for specifying and authorizing the purchase of equipment used in broadcast facilities. These facilities include a-m, fm, and TV broadcast stations; CATV systems; ETV stations, networks and studios; audio and video recording studios; consultants, etc. Subscription prices to others are: U.S., its possessions and Canada—\$10.00 one year, \$18.00 two years; elsewhere—\$15.00 one year, \$25.00 two years.

Copyright © 1969 by Mactier Publishing Corp., New York City. Controlled Circulation postage paid at Duluth, Minn.

NOW...

Guarantee your audience's listening comfort



Our Automatic Loudness Controller delivers the sound that's right for every ear. Automatically eliminates excessive loudness. Unconditionally guaranteed!

No doubt about it. Other devices can control volume and modulation levels. That's what they're for.

But only one instrument can analyze and automatically control loudness levels.

Ours.

Reason? We designed it "from human ears". At CBS laboratories, we tested every conceivable sound sensation: Frequency content. Peak factors. Ballistic response.

Combinations of complex signals. All the characteristics that affect even the most sensitive ear.

Result? An instrument so "humanly" perceptive it automatically keeps loudness levels under control. And does it inaudibly. Keeps your audience in their chairs . . . listening comfortably. No constant jumping up and down to flip the dial. They enjoy continuous listening pleasure.

Give this remarkable instrument an operational test yourself. Install it. And use it *free* for 30 days. You *will* believe your ears.

Regular model (pictured) is priced at \$825. Stereophonic model priced at \$1650. Both guaranteed unconditionally.

Write or call us collect (203) 327-2000.

PROFESSIONAL
PRODUCTS
CBS LABORATORIES
Stamford, Connecticut 06905
A Division of Columbia Broadcasting System, Inc.



Automatic Loudness Controller #223

CBS LABORATORIES

Circle 3 on Reader Service Card

BROADCAST INDUSTRY NEWS

Task Force suggests fewer curbs on CATV; urges creation of two powerful authorities

After a 15-month analysis of telecommunications in the U.S., the President's Task Force on Communications Policy submitted its 400-page report to President Johnson early in December. Implicit in the Force's conclusion that CATV is commission's hope for stimulating diversity in programming while retaining localism, and contrary to the FCC's Notice on CATV (see p. 12), is a call for eased restrictions on CATV.

More explicit and equally controversial are two of the committee's recommendations—that a single authority direct spectrum allocation within the U.S. and that one carrier manage international telecommunications.

The 17-man committee, headed by Eugene V. Rostow, undersecretary of state for political affairs, decided that CATV is presently the most promising means of achieving diversity after it consid-

ered six other possibilities: low-power uhf stations; government control of programming; pay TV; distribution of TV programs by satellite; video recording; development of a fourth commercial network.

Cable TV, according to the report, has developed because it assures access and a clear signal, in many localities, to more stations than does over-the-air broadcasting. Cable TV can offer 20 channels at relatively low cost per channel (and thus originate programming), is potentially well suited to selective distribution and can survive without government subsidy or protection.

Other broadcasting recommendations of the Task Force include:

- Full copyright liability should be assigned to CATV for using distant TV signals and no liability for using purely local TV signals.
- The FCC should investigate

cross-ownership of CATV and broadcasting in the same market and consolidated ownership of cable, broadcasting, newspapers, magazines and movie interests on a national scale.


- "Unusable" TV channels (due to interference) should be used by land mobile services.
- The federal government should use TV channels to expound on national goals—job training, literacy, health, etc.
- Federal agencies should participate in license renewals and rulemaking proceedings before the FCC as a way of getting their own programs aired.
- As for economics, a sliding scale of license fees might be instituted, dependent upon bandwidth, power and other elements.

On spectrum management, the committee decided that a single spectrum manager is needed to handle allocations between government and nongovernment use and to coordinate various activities of the government in using the spectrum. Presently, a formal mechanism for settling conflicts between nongovernment and government users doesn't exist. According to the Task Force report, "the spectrum manager and the FCC should encounter no major obstacles in working together, under the watchful eye of Congress; any needed changes in existing broadcast station allotment plan which would appropriately reflect the objectives of both agencies."

Aware of the irony in that the government—large user of telecommunications facilities and equipment—has no central office to oversee within the government, the committee suggested that an "entity" be established that would encompass the role of spectrum manager and go further into the field of telecommunications. Composed of lawyers, scientists, statisticians and economists, the executive branch "capability" would help other government agencies and coordinate the government's activities in telecommunications research and development.

Included in these most far-reaching recommendations for re-

Earth Station Inaugurated at Etam, W. Va.

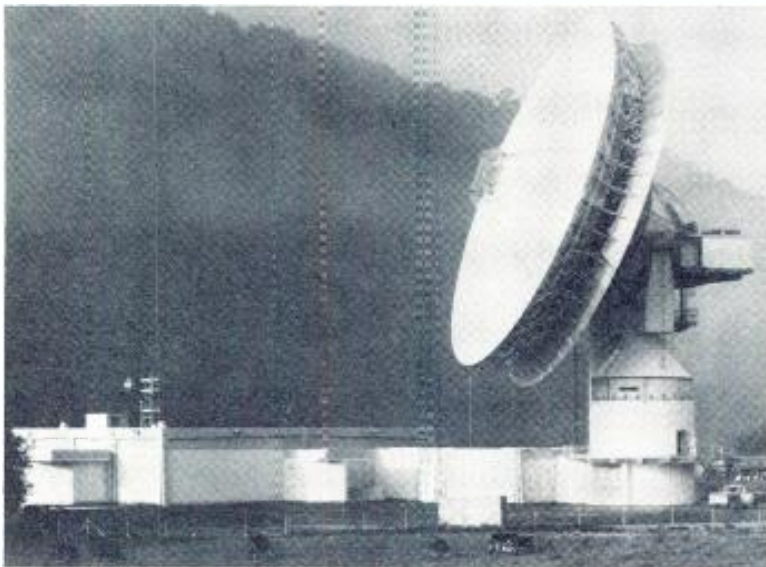

Silhouetted against dramatic background at Etam, West Virginia, is the antenna at Comsat-operated earth station—the first of three new Comsat-managed installations in operation since the fall. Basic communications equipment is Raytheon's solid state KTR-3A microwave communications equipment. Small antenna at left is part of the American Telephone and Telegraph Company's microwave, also Raytheon equipped.

This totally solid-state microwave link is thirty miles of CATV coaxial cable, sixty-two line amplifiers, twelve hundred telephone poles, one drilling rig, two property lawyers, nineteen rights of way, six shovels, eight laborers and three irate housewives.

MA-13BX totally solid-state, crystal controlled microwave links for CATV common carrier (10.7-11.7 GHz) and CARS (12.7-12.95 GHz) bands, exclusively from Microwave Associates. Superb color and dependability. No klystrons, no harmful voltages, no overheating, no tube replacement costs, and only minimal power consumption and maintenance. Complete systems engineering and turnkey services available. For details, write or call (617) 272-3000.



MICROWAVE ASSOCIATES
Burlington, Massachusetts

Field Sales Offices: Burlington, Mass.,
Atlanta, Ga. Kansas City, Mo., Wash-
ington, D.C., Sunnyvale, Cal.

MA13BX
RECEIVER
TYPE NO. MA85013
MICROWAVE ASSOCIATES, INC.
BURLINGTON, MASS. U.S.A.

vamping the nation's communications structure since passage of the Communications Act of 1934, is the proposal to create a government-sponsored, privately owned monopoly to transmit all international communications, now performed by Comsat, and the voice and record (hard copy) carriers. Objections within the Task Force centered around the fear that the government would be fostering creation of a monopoly that would inhibit competition in international communications. But the majority argued that with the development of high-capacity underseas cables and communications satellites, the distinction between voice and record carriers has lost its technical significance.

The committee suggested that the merger would further U.S. foreign policy objectives by strengthening the country's hand in international telecommunications negotiations. The Task Force observed that foreign companies, most of which are nationally owned monopolies, would no longer be able to "play off" one American carrier against another to gain advantage in communications agreements.

The committee was vague on where the new company begins and where the present carriers end. At one point, the report suggested that the new company should be allowed to deal directly with large communications users. Thus, the new company would be competing directly with present carriers.

The Task Force recommended that a "pilot" project be undertaken with Comsat in a "trustee role," sending up satellites for an experimental domestic system.

ETV interconnections begin on trial basis

The American Telephone and Telegraph Co. began to provide facilities for network interconnections of 150 public television stations during prime time in mid-December.

Frank Pace, Jr., Corporation for Public Broadcasting board chairman, says that AT&T made the interconnection available during prime time hours from 8 to 10 on Sunday through Thursday evenings "at costs lower than commercial rates," representing a "substantial saving to public television." The start-up costs of about \$500,000 for the trial network were funded jointly by the Corporation for Public Broadcasting and the Ford Foundation.

Pace says that the project is just the beginning of the Corporation's goal of public television—"free interconnection or substantially reduced rates for whatever amounts of time public television may require." The growth of interconnection service, Pace says, "offers an opportunity for new kinds of programming and a more effective distribution system."

Three experts preview broadcasting's future

The future of broadcasting was projected both technologically and conceptually in a lecture-demonstration produced by Triangle Stations at the Lincoln Center for the Performing Arts on Nov. 13. Previewing the next decade of broadcasting was William E. Roberts, president, Ampex Corp., Betty Furness, special assistant to the President for consumer affairs and Rosel H. Hyde, chairman, FCC.

Considering television as a medium of entertainment, education and cultural exposure, Roberts foresaw five advances in broadcasting technology:

- Automation and mechanization of broadcasting stations.
- TV receivers in the form of large, flat wall screens, accompanied by stereophonic audio.
- Higher color fidelity and stability.
- A 3-dimensional video.
- Increasing importance placed on satellite communication in the common carrier communication industry.

As a unilateral communication medium, television receivers to Roberts would become the communication centers. Roberts illustrated his vision of TV as more than an entertainment center by citing the ability of the student of the future to dial access to his desired audio-video material.

Miss Furness challenged the present broadcasting programming and offered a solution. According to her the problem is that the medium has created its own message—"everything for everybody." Miss Furness suggested that TV be used to warn, help and teach.

"Television doesn't preface its commercials by saying here it is if you don't have dentist's bills, aged relatives to support, or even if you can simply afford it. They sell the idea that not only is this the way life is meant to be, but this is the way it is."

Miss Furness continued to say that something is overlooked—"the power of television itself as

a medium used by people to alleviate the humdrum existence of four walls in slums, in rural areas, in ghettos . . . I think TV has a responsibility toward these people, the responsibility of making things clear, of really telling them how it is . . . A newly recognized fact of life is that the poor do indeed pay more. It has been proven that the very TV set we've been talking about that costs you and me \$129.95 can cost the poor \$249.94. It costs a lot of money to be poor today . . ."

One of Miss Furness' solutions was to incorporate into the daily soap operas consumer education. "I think TV is a wonderful thing for the disadvantaged to have. I agree with the caseworker who called it 'a window on the world,' but I think TV has a tremendous responsibility in the view it shows through that window."

Agreeing with Miss Furness in that history will judge us not by the tools we create, but by how we use them, Hyde also asked that we use broadcasting in the spirit of good will and wisdom. Hyde stressed that the future will demand broadcasters to focus more and more on critical issues facing society. Hyde asked for a re-examination of the service concept: "We should make the best use of not scarcity of channels, but channels in abundance produced by technological achievements."

Committee to advise on EIA telecommunications

An Electronic Industries Association Committee on Telecommunications Policy has been appointed by EIA President Mark Shephard, Jr. Headed by Frank Barnes, the Committee will serve as an advisory group to the association's board of directors and its executive officers in the field of telecommunications.

Proposed functions of the 17-man Committee include:

- Defining the technological scope of telecommunications in terms acceptable to government and industry.
- Preparing programs and recommendations for information and guidance of government agencies and officials responsible for planning, procurement and/or regulation of telecommunications facilities.
- Investigating with government assistance, the opportunities for applying telecommunications services and technology in government-sponsored programs designed to

New QUALITY LOCAL-ORINATION PROGRAMMING



Just \$220 starts you on your way




LOW COST... FIELD-PROVEN DESIGN ... EXTREME FLEXIBILITY

If you are planning a local origination studio, you'll need all three. And you get all three in DYNAIR equipment, which provides professional quality and professional effects in your local-origination distribution and programming at true budget prices.

Want to start small? For just \$220 you can use the VS-220A MINI-FADE (above) to mix or fade between the outputs of two cameras or other non-composite video sources. Or for only \$550 more, you can add the SE-260A MINI-SPLIT (left) for professional effects like the inserts or wipes shown below.



Or would you like complete color-compatible facilities for any degree of fade-in, fade-out, lap dissolve or superimposition, with up to 12 inputs and preview buss? The solid-state VS-121B-RS Remote-Controlled Broadcast Switcher-Fader (below) will do it all for just \$2250.

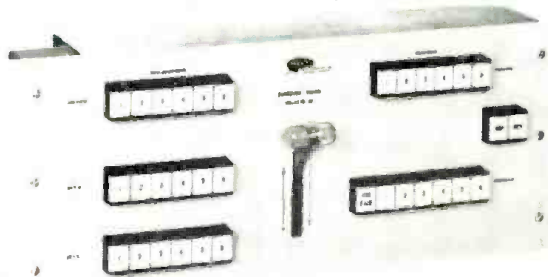

Model VS-121B-RS

FOR THE IMPORTANT EQUIPMENT BETWEEN CAMERA AND MONITOR...

Switches... Sync Generators... Video and Pulse Distribution Amplifiers... Screen Splitters... Audio/Video Modulators...

LOOK TO DYNAIR

HERE'S WHAT TO DO:

First: Send today for a set of DYNAIR Application Engineering IDEAS. Second: Outline your requirements. Third: look over our firm quote on a programming system designed specifically for your job. Finally: just turn on the equipment and send your subscribers programs equal to the best.



DYNAIR
ELECTRONICS, INC.
SAN DIEGO, CALIFORNIA

6663 Federal Blvd., San Diego, Calif., Zip 92114
Phone (714) 582-9211

Name _____

Title _____

Company _____

Address _____

City _____

State _____ Zip No. _____

enhance the nation's economic and social welfare.

- Developing and facilitating plans and means whereby the knowledge and manpower of the electronics industry can best be used to assist the government in executing programs which involve telecommunications equipment and services.

NAB study shows public wants more editorials

According to a recent survey by the National Association of Broadcasters, most of the 70 percent of the adult population which has heard editorials over the air would like to hear more of them.

The survey on "public attitudes toward broadcast editorializing" is the second of two studies NAB has completed on this subject in the last two years. Major findings show:

- Some 70 percent of the public think broadcasters should editorialize—a proportion close to the 75 percent who think newspapers should.

- People who have seen and heard broadcast editorials give them high marks—in many cases higher than newspaper editorials—on specific characteristics such

as helping people understand and think about issues.

- Broadcasters have wide latitude in the subject matter people feel is suitable for editorial discussion.

- There is greater public esteem for stations that editorialize than for those that don't.

- The public, by a four-to-one margin, favors regulation of broadcast editorials by stations themselves, rather than by the government.

TV breakthrough: laser display system

Development of a laser display system that produces large, bright, full-color television pictures has been announced by General Telephone & Electronics Laboratories. Presently a laboratory model, the system is considered to be a technological breakthrough toward achieving large-screen, color television pictures so bright that they could be shown in fully lighted rooms for educational, entertainment and commercial uses.

The system takes "off-the-air" signals from a standard home television set, impresses them on three laser beams and passes them through optical display devices to create quality color pictures.

Radiation control becomes 1968 law

The Radiation Control for Health and Safety Act has become law, directing the Secretary of Health, Education and Welfare to establish and administer performance standards for the control of radiation from electronic products.

Committees of the House and Senate cite numerous incidents which demonstrate the need for electronic products radiation control: studies showing "excessive" radiation from color television receivers to be "industrywide"; discovery that 24 out of 30 microwave ovens at a U.S. medical center "leaked potentially hazardous radiation"; a 1967 survey showing about two-thirds of about 112,000 medical X-ray machines did not meet current State recommendations or regulations.

WGBH fosters radio drama renaissance

WGBH-FM is not to be outdone by WGBH-TV's creativity (Nov. *BM/E*, p. 33-36). On Dec. 1, WGBH-FM launched its Radio Drama Development Project—a nationwide campaign to revive and update radio drama. More than 150 non-

McMartin

**put many eggs
in one basket!**

commercial radio stations broadcast selections from WGBH-FM's "Ten New Plays in Stereo," a record album distributed by the Project's backers without charge. The hope of the Project is to stimulate rebirth of local radio drama which flourished in the U.S. in the '40's and died in the '50's with the advent of television.

Funded by \$114,000 last year from the National Endowment for the Arts, Old Dominion Foundation and WGBH Educational Foundation, the Project founded a repertory company and conducted a \$10,000-prize national script contest. Judges Burgess Meredith, Douglas Cleverdon and William Alfred awarded top prize of \$5000 to Philip Lee Devin for his "Ballad for a Wanton Boy." Devin is currently teaching playwriting, dramatic literature and acting at Vas-sar College.

Receipt of over 400 manuscripts encouraged Project workers in their belief that radio is a visual medium that works closer to the mind than any other and that this generation would respond to the existential quality of shifts in time, space and point of view permitted by stereo recording. Project enthusiasts are hardly alone—Samuel

Beckett, Archibald MacLeish, Harold Pinter, Eugene Ionesco and Ingmar Bergman are with them all the way. Copies of WGBH's record album is available free to all interested educational stations.

Circle 300 on Reader Service Card

FCC clarifies rule for remote pickup stations

The logging requirements for remote broadcast pickup stations have been clarified through adoption of an amendment to Section 74.481 of the rules and the denied petition of Pacific FM, Inc., licensee of station KPEN-FM, San Francisco. The amendment became effective Nov. 19, 1968.

Pacific FM contended that those sections requiring log entries covering specific hours of operation, programs transmitted, point of origination, pertinent remarks about transmission, checks of antenna lighting and frequency checks are anachronistic, impractical and unnecessary.

The Commission replied that because it cannot monitor all stations at all times, the stations must keep logs to have a record if interference complaints arise. The FCC called the logging requirements for

remote broadcast pickup stations "modest," but said that the simplicity of the language in the rule may have led to misunderstanding.

Mini-studio debuts in telephone booth

Radio station WIOD has opened what may be the world's tiniest mini-broadcasting studio at the Broward County Courthouse in neighboring Fort Lauderdale—it's in a telephone booth.

Inside the doorway of the courthouse press room, the "studio" (air-conditioned and fully carpeted) provides a direct line for the transmission of news broadcasts from Fort Lauderdale via WIOD's Miami news headquarters.

It all started when the head of the station's Broward County News Bureau wanted a live microphone so that he could get good quality on his feeds to his office 25 miles away. After search for even a broom closet failed, the idea of a phone booth in the press room was thought up.

One problem: taxpayers, dimes in hand, are forever dashing into the booth looking for a place to deposit and call. What happens when the phone rings?

FM main channel and Stereo/SCA off-the-air monitors and re-broadcast receivers are now combined into one neat little package

we call the
TBM-
1000A.

New products always upgrade a station's operation, make the work more efficient and faster. Here are some of the features that make the TBM-1000A a device that all up-to-date stations will want to have:

- All-transistorized receiver.
- Uses same circuitry as the TR-66A multiplex receiver with FET's in the front end and integrated circuits.
- Has composite signal output. Provides left and right audio when used with the TBM-0380 stereo demodulator.
- Will provide SCA audio if two optional plug-

in circuit boards are added. No wiring needed.

- Has true peak-reading meter.
- Monitor speaker can be switched to either main channel or SCA.
- Simultaneous recovery of main and SCA channels in audio form — 600 ohms.
- Crystal controlled to one frequency within the 88-108 mc band.
- Rack-mounted; only 3½" high.
- Optional wooden cabinet for use in executive offices as an off-the-air receiver.

McMartin®

McMartin Industries, Inc. 3104 Farnam Street Omaha, Nebraska 68131

Circle 6 on Reader Service Card

FOCUS ON **CATV**

FCC takes sweeping new look at cable industry

Friday, December 13, will may go into the annals of CATV history as a hard luck day. It was on that day that the FCC chose to disclose its new look at the cable industry. It was a look that puts CATV down. To the discomfit of others, the Commission also authorized Pay TV to proceed on a nonexperimental basis, effective June 12, 1969.

The "FCC Proposed CATV Rules and Inquiry" would:

- require local program origination.
- require that cable operators obtain retransmission consent before carrying distant signals into major markets.
- limit the number of distant signals that can be carried within 35 miles of the station in smaller markets (three networks, one independent and one ETV).
- prohibit cross-ownership in a single area.

The new proposal requires a broadcaster to give this notice eight days before the broadcast date. The CATV operator, according to the Commission, must for his part, keep the licensee informed about his plans for carrying signals and the program schedules, if he knows them, of the stations providing the signals. If the CATV operator cannot obtain this information, the broadcaster must get it directly from the source of the signals.

In the interim the FCC would halt all major market proceedings that apply to systems within 35 miles of the center of the market except for a few exceptions to gain experience on the retransmission concept.

Although interim procedures are established to prevent disruption of service, any rules adopted will be applicable as they become effective to all systems beginning service after December 20, 1968.

Section III encourages CATV operators to lease "some channels on the system to others for the purpose of program origination or other communications services."

In the important and sensitive area of advertising, the Commissioners were unable to reach a definitive conclusion.

Equal time, sponsorship and fairness rulings proposed in the

Notice closely parallel those already in by broadcasters.

The Commission has stirred up a hornet's nest of reaction. According to Frederick W. Ford, president of NCTA. "The FCC has fought tenaciously to gain regulatory powers over CATV, and having prevailed, seeks to use these powers to eviscerate the industry."

The Ford statement goes on to say that "without benefit of hearings, the Commission has instituted proceedings to bring to halt further expansion of CATV, disrupt the patterns of ownership, curtail any improvement of operating systems, and probably destroy the present manufacturing capacity of the industry."

Ford views the Commission's new rules as being "in defiance of the studied recommendations of the Task Force" (See p. 6).

In fitting CATV into the media mix, the Commissioners propose to prohibit cross-ownership of CATV and television stations in the same area. The Commission also proposes a rule to limit on a nationwide basis the total number of systems to be commonly owned, based on the number of subscribers, the size of the communities, and the regional concentration and the other broadcast interests of the CATV operator.

The Commission stresses "that no grandfathering is contemplated" with respect to the application of the cross-ownership rules. "although consideration will be given to the question of affording an appropriate period within which compliance is to be achieved."

With respect to importation of signals into major markets, there is to be a substitution of a fixed mileage standard. This 35-mile standard will take the place of the evidentiary hearing and will be adhered to in every case. (See p. 12, Dec./68 *BM/E*.)

According to the Commission, the mileage standard has the advantage of administrative ease and provides certainty to the affected industries. It is to be measured in air miles from the main post office in the designated market community.

While the proceeding is pending, the Commission will process microwave applications only if they are consistent with proposed rules. Requests for processing some "leap-frogging" by CATV systems outside of any 35-mile zone would be considered where waivers of proposed rules is contemplated. CATV systems in other

than top-100 markets would be permitted to carry distant signals provided they do not leap-frog.

Irving Kahn, chairman and president of TelePrompTer Corporation, reacting to the new regulations, states that the "proposed new rules are harshly and unfairly restrictive upon the CATV industry, but they are not unexpected in the light of the Commission's traditional policy of protecting the economic status quo of the broadcast industry at the expense of the new services CATV could provide the public."

Technical standards are contemplated but have not yet been formulated. The Commission invites "concrete and detailed" suggestions on this and other provisions. Comments may be filed on or before June 16, 1969, with reply comments due August 16, 1969. Comments on the rulemaking proposals are due on or before March 3, 1969, with reply comments due April 3, 1969.

Despite the alarm with which industry spokesmen greeted the new rules, Chairman Hyde stated at the Friday the 13th press conference that the Commission "was simply seeking to stimulate and explore CATV's full potentiality. He went on to say that the Commissioners "feel it is unfair for CATV distributors to compete with TV broadcasters who must get their programs into the market without also having to originate some programs."

McClellan receives copyright recommendations

Although it's well nigh impossible to predict what legislation the Senate Subcommittee on Patents, Trademarks and Copyrights, under the chairmanship of Sen. John L. McClellan (D-Ark.) will devise, a certain degree of insight can be gleaned from a look at a cross-section of the 20-odd filings forwarded thus far to the Subcommittee.

NCTA's Frederick W. Ford holds that the "only workable compromise" is an "across-the-board approach." He maintains that copyright legislation must incorporate four basic provisions:


- 1) A compulsory license to distribute unaltered broadcast signals.
- 2) Recompense to the copyright owners in the form of a single, inclusive payment for all broadcast signals distributed by a cable system. The fee would be defined by

Continued on page 72

**Buying
standard
coaxials
today
is like
buying
doughnuts
to get the
holes!**

**Close the gaps.
Now.**

Standard Coaxials
have limited range
with many areas of
hidden discontinuities

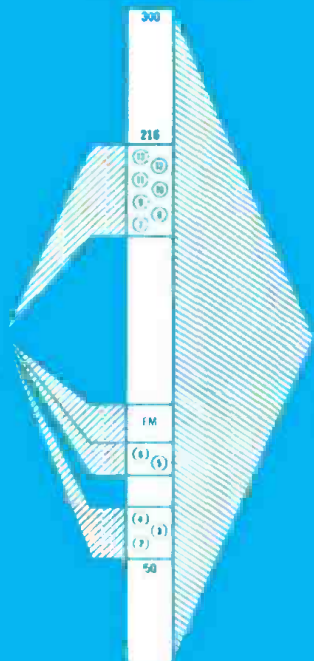

**SUPERIOR
E-X-T-E-N-D-E-D
SPECTRUM
COAXIALS**
cover the full
range to 300 MHz
and beyond with
NO DISCONTINUITIES

**Superior Continental's
Extended Spectrum Coaxials
have no discontinuities
to 300 MHz and beyond.**


Now you're no longer limited to spotty coverage to only 216 MHz. With Superior Continental's new Extended Spectrum Coaxials, you can use the full, continuous range to 300 MHz and higher. That's an additional 84 MHz segment at the top. And as a bonus, complete frequency utilization from 216 MHz down. With no gaps.

With this additional transmission space, Superior Continental's Extended Spectrum Coaxials give you room to grow in the future. With new CATV channels. Broader ETV and ITV programming. More CCTV for business and industry. Data transmission. Remote control telemetering. Alert and alarm systems. Traffic and highway control networks.


Of course, you can specify Extended Spectrum Coaxials in the right construction for every application. With exclusive Copperglass or Alumagard shielding. In aerial or direct burial types.

Extend your services tomorrow by closing the gaps today. Install Extended Spectrum Coaxials. By Superior Continental.

For information and prices, write or call:
Superior Sales and Service Division
P. O. Box 2327 Hickory, North Carolina 28601
Phone 704/328-2171

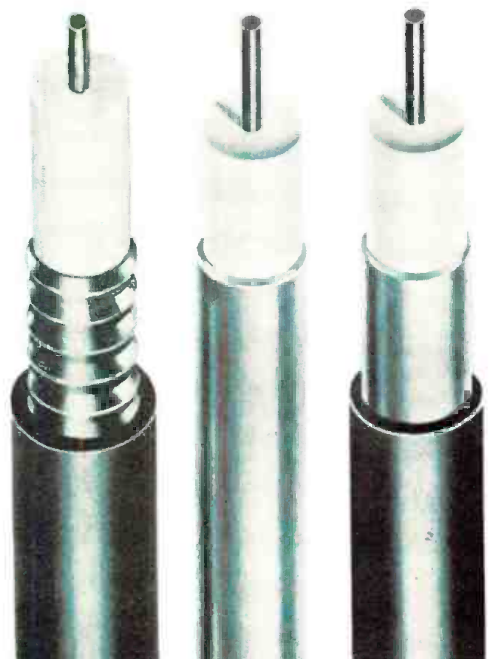

Bauer AM Transmitter. Aft view.

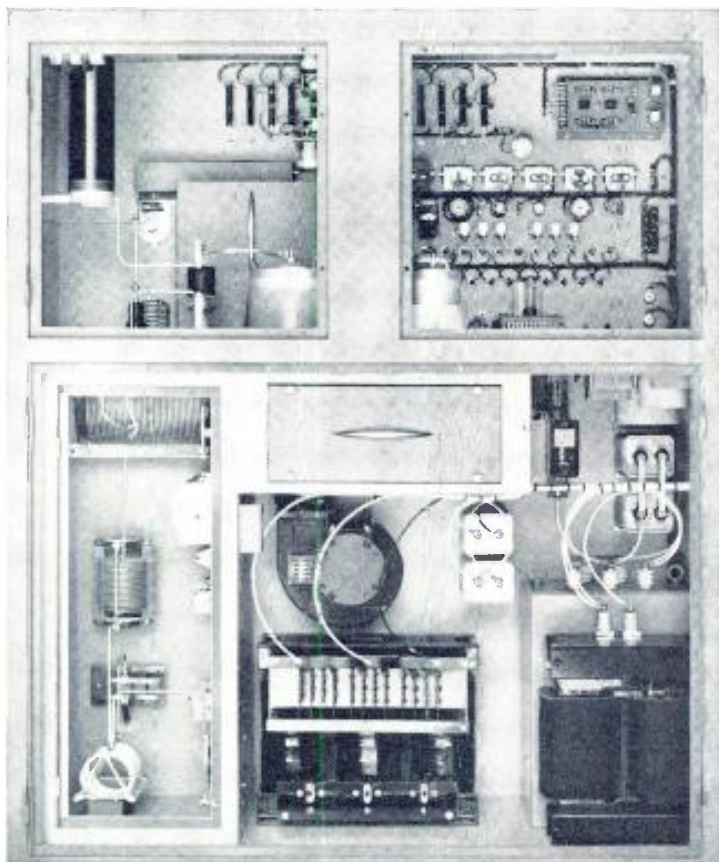

Clean.

This is the aft end of the all-new Bauer AM Transmitter from Granger. The 5 Kw Model FB-5V.

Look at its well-engineered mechanical layout. Clean. All components are arranged within easy reach for quick inspection and servicing. □ Model FB-5V is compact. Measures only 75"H x 60"W x 30½"D. In fact, it's the most compact 5 Kw AM transmitter on the market. □ Around in front, full metering shows all functions simultaneously. Tally-light system provides instant warning of any malfunction or momentary overload, permits fast reset to back-on-the-air status, and pinpoints the cause for later servicing. □ Compare its performance. Low distortion, wide frequency response and 6,000-watt power-plus capability. Excellent modulation capability—boosts signal in fringe areas and provides "clean" sound. □ Consider the cost-savings. The output tube's operating level has a service capability of more than 20,000 hours, proved in actual use. Save hundreds of dollars per year in operating costs. □ Need a higher kilowatt model? Ask us about the all-new 10 Kw Model FB-10J. It has the same clean, compact features as the FB-5V, with 12,000-watt power-plus capability □ Write for complete data.



Granger Associates / **Bauer**
BROADCAST PRODUCTS DIVISION

1601 California Avenue, Palo Alto, California 94304

Circle 8 on Reader Service Card

MANAGEMENT
Q&A



SI WILLING

Have questions on station management and sales? Ask Si. He'll draw on his many years of experience managing successful radio stations in a variety of markets. Si Willing is president of KMAR (Winnboro, Louisiana) and of KNNN Broadcasting Corp. (Frisco, Texas). He's also chief exec of brand-new KCRF-FM (Winnboro, La.) due to go on the air in May. Send your questions to: Si Willing, BM/E, 820 Second Ave., New York, N.Y. 10017.

Q. We have a new radio station in a small agricultural market. We're the only station in this area. The merchants here have been print-oriented for over a century. They use the local weekly newspaper and handbills for their weekend specials. Since we're new and have no success stories to present to these merchants, how do we get them to advertise?

Ed Marshall. Columbia, La.

A. Tradition is a difficult thing to contend with but it can be done. There are small-town radio stations that do very well. Check your yearbook for small market stations located near you. Visit them and respectfully ask them to give you some of their success stories. The next step is to salvage carefully all of the discarded circulars from the post office trash cans. Tie them in red ribbon. Present them to the advertisers with the explanation

Continued on page 71

Attention TV Stations:

We've got news for you!

FILMLINE'S professional color film processors now available for TV NEWS

The FILMLINE Models FE-30 and FE-50 are exciting new color film processors designed specifically for use in television station news departments. The design is backed by Filmline's reputation as the world's leading manufacturer of professional film processors for the commercial motion picture laboratory industry.

Now for the first time the television industry can enjoy the benefits of professional caliber equipment incorporating exclusive FILMLINE features that have paced the state-of-the-art in commercial laboratories, at a cost lower than processors offering less.

After you check these exclusive Filmline features you'll want to install a Filmline processor in your news department NOW!



MODEL FE-50:
16 mm Color Processor
for Ektachrome Film. Speed
50 FPM. **\$22,500**



MODEL FE-30:
16mm Color Processor for
Ektachrome film. Speed 30
FPM. **\$16,400**

●"FILMLINE OVERDRIVE FILM TRANSPORT SYSTEM"

This marvel of engineering completely eliminates film breakage, pulled perforations, scratches and operator error. The film can be deliberately stalled in the machine without film breakage or significant change of film footage in solutions. The heart of any film processor is the drive system. No other film drive system such as sprocket drive, bottom drive or simple clutch drives with floating lower assemblies can give you the performance capability of the unique Filmline Overdrive Film Transport System.

●"TORQUE MOTOR TAKE-UP" gives you constant film take-up and does not impose any stress or strain on the film itself. Completely independent of the film transport system. This FILMLINE feature is usually found in professional commercial processors but is incorporated on the FE-30 and

FE-50 models as standard equipment. Don't settle for less!

●"TEMP-GUARD" positive temperature control system. Completely transistorized circuitry insures temperature control to well within processing tolerances. Temp-Guard controls temperatures accurately and without the problems of other systems of lesser sophistication.

●"TURBO-FLOW" impingement dryer. Shortens dry-to-dry time, improves film results, and carefully controls humidity content of your valuable (and sometimes rare) originals. Immediate projection capability is assured because the film dries flat without the usual curl associated with other film processors.

●"ZERO DOWN TIME" The reputation of any film processor is only as good as its reliability. The

combination of the exclusive and special added Filmline features guarantees trouble-free operation with absolute minimum down-time and without continual operator adjustments. Recapture your original investment in 2 years on maintenance savings alone. Filmline's "Push the button and walk-away processing" allows inexperienced operators to turn out highest quality film.

●"MATERIALS, CONSTRUCTION AND DESIGN" All Filmline machines are constructed entirely of metal and tanks are type 316 stainless steel, heliarc welded to government specifications. The finest components available are used and rigid quality control standards are maintained.

Compare Filmline features to other processors costing more money. Feature-by-feature, a careful evaluation will convince you that Filmline offers you more for your investment.

Additional Features included in price of machine (Not as extras).

Magazine load, daylight operation ■ Feed-in time delay elevator (completely accessible) ■ Take-up time delay elevator (completely accessible) ■ Red brass bleach tank, shafts, etc. Prehardener solution filter ■ Precision Filmline Venturi air squeegee prior to drybox entry ■ Air vent on prehardener ■ Solid state variable speed D.C. drive main motor ■ Bottom drains and valves on all tanks ■ Extended development time up to two additional camera stops at 50 FPM ■ Pump recirculation of all eight solutions thru spray bars ■ Temperature is sensed in the recirculation line ■ All solutions temperature controlled, no chilled water required ■ Built-in air compressor ■ Captive bottom assemblies assure you constant footage in each solution ■ Change over from standard developing to extended developing can be accomplished in a matter of seconds ■ Impingement dryer allows shorter put through time.

Partial listing of Filmline Color Installations:—NBC- New York, NBC- Washington, NBC- Cleveland, NBC- Chicago, CBS & ABC Networks, Eastman Kodak, Rochester.

Laboratories: De Luxe Labs, General Film Labs (Hollywood), Pathe-Labs, Precision Labs, Mecca Labs, Color Service Co., Capital Film Labs, Byron Film Labs, MGM, Movie Lab, Lab-TV, Technical Film Labs, Telecolor Film Labs, Guffanti Film Labs, A-One Labs, All-service Labs, NASA Cape Kennedy, Ford Motion Picture Labs.

TV Stations: WAPI-TV, KTVI-TV, WXYZ-TV, WTPA-TV, WBTV-TV, WEAT-TV, WMAL-TV, WSYR-TV, WDSU-TV, WVUE-TV, WJXT-TV, WTOP-TV, WAVY-TV, KTAR-TV, WTVR-TV, WFBC-TV, WMAR-TV, WCKT-TV, WAVE-TV, WCPQ-TV, WAPA-TV, WCIV-TV, WJIM-TV, WWL-TV, KYW-TV, KETV-TV, WNBQ-TV, KSLA-TV, WSAZ-TV, WHP-TV, WHCT-TV, WTWO-TV.

All prices F.O.B.
MILFORD, CONN.



Send for Literature.
BMJ-69
Time & Lease
Plans Available

"When you buy quality Filmline Costs Less"

Circle 9 on Reader Service Card

INTERPRETING THE FCC RULES & REGULATIONS

Protection of television stations by CATV systems—Section 74.1103

SECTION 74.1103 OF THE COMMISSION'S RULES (the so-called "nonduplication" or "program exclusivity" rules) provides that CATV systems shall maintain the program exclusivity of Principal City, Grade A, Grade B, and 100-watt translator signals, against signals of lower priority but not against signals of equal priority.

The rules further provide that the TV station must request protection from the CATV system; upon receipt of same, the CATV may request that the TV station provide eight days' prior notice as to the date and time of every program to be protected and of every program to be deleted.

The basic problem: notice

Not unexpectedly, CATV systems have taken the position frequently that the TV station(s) has failed to provide the notice required; in particular, CATVs have claimed that they have not received the date and time of program to be deleted. The basic problem, intentionally and unintentionally, is usually one of "communications"; the more frequent disagreements arise from lack of understanding between the parties. Therefore, what are the parties' obligations under Section 74.1103? Who has the burden of notice? How great is that burden, or what is adequate notice? A review of the Commission's purposes and the pertinent provisions of Section 74.1103 is warranted in order to answer these questions.

The purpose of the program exclusivity rules

In the *First Report and Order* in Docket No. 14895 and 15233 where the Commission was dealing with a 15-day nonduplication requirement, it stated (38 FCC at p. 734):

... the searching out of duplicating programs in the schedules of competing stations can impose some burden on the CATV operator—especially with regard to syndicated and feature film programs, which may be scheduled in different markets on widely varying dates with little regular pattern, and particularly where it is required to protect more than one station. We think this task should properly be undertaken by the broadcaster requesting protection, i.e., that he should specify both the programs to be protected and the program against which he desires protection. For the most part this burden will be minimal—particu-

larly in relation to regularly scheduled network programs. Where it is more than minimal, we think the broadcaster should bear it unless the CATV operator would prefer to do so himself . . . (Emphases supplied.)

In the *Second Report and Order*, the Commission further stated (2 FCC 2d at pp. 751-752):

... we think that the broadcaster should afford the CATV sufficient advance notice of nonduplication requests to permit the CATV system to make its program schedule available to subscribers and to set an automatic switching device only once for the entire week. Accordingly, we shall amend Section 21.712(h), 74.1033(f), and 91.559(f) to require that the station, upon request of the CATV operator, shall give notice under these sections at least 8 days prior to the broadcast to be deleted. Since same-day nonduplication affects principally network programs, which are ordinarily presented at the same time each week during the network season, this amendment should pose no difficulty for the station. Indeed, in most instances it would appear that such notice could be given at the start of the network season and continued in effect until further notice occasioned by changes in the schedule of the network or the local station. (Emphases supplied.)

Thus, in both the *First Report* and the *Second Report*, the Commission has placed the primary burdens of notice upon the broadcaster. The provisions of Section 74.1103 are no less clear. A synopsis thereof follows.

Section 74.1103(e) (nonduplication in general) provides that the CATV system shall maintain the program exclusivity of all 100-W translators and Grade B or higher priority signals carried on the systems against signals of lower priority. CATVs cannot duplicate the programs of such stations on the same day as broadcast by the protected station.


The all-important Section 74.1103(f) (dealing with the notice required for nonduplication) provides, in pertinent part, as follows:

- (1) The television station must request nonduplication protection from the CATV system.
- (2) The CATV, in turn, may request that the TV station seeking protection provide:
 - (a) Eight days prior notice of the date and time of every program to be protected; and
 - (b) Eight days prior notice of the date and time of every program to be deleted.

In order to force the TV station to give eight days prior notice, the CATV—after the TV's initial request for protection—must provide a list of all TV stations it carries and indicate channel substitutions, if any. This places the burden of deter-

This section, providing broad interpretation of FCC rules and policies, does not substitute for competent legal counsel. Legal advice on any given problem is predicated on the particular facts of each case. Therefore, when specific problems arise, you would be well advised to consult your own legal counsel.

BBRC's New TCB-14R Gives You *More Color Monitor In Less Space*

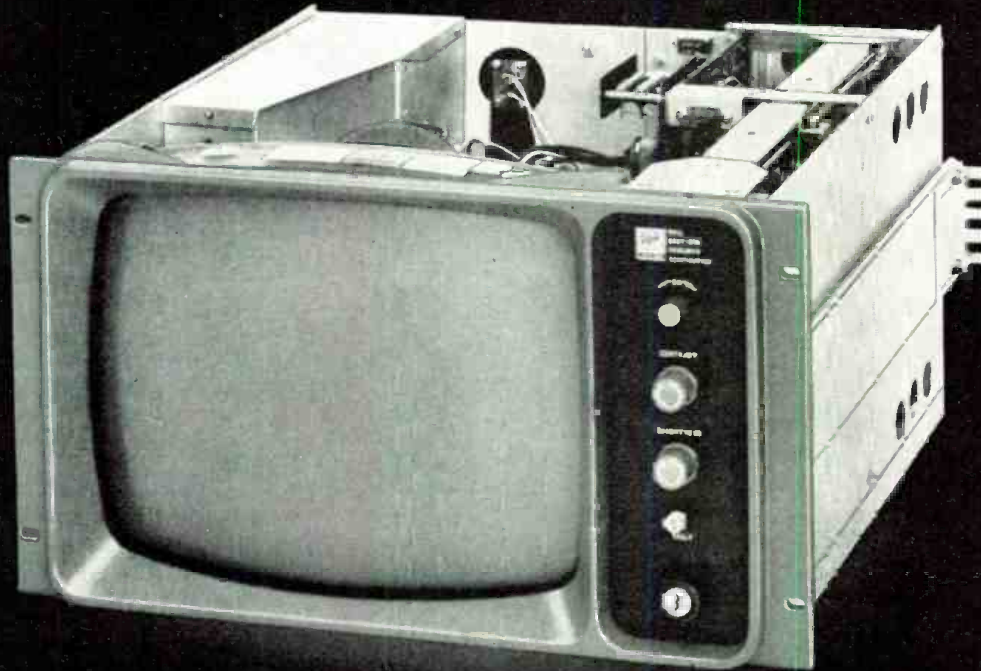

Ball Brothers Research Corporation has designed a color broadcast monitor to fit EIA rack space of 10½ inches high by 19 inches wide and 18 inches deep. It has a 14-inch display. Its minimum vertical rack space greatly increases critical viewing and placement possibilities. Another thing you'll appreciate: all operating controls are front-accessible on an extendible PC card. More? Solid-state; high performance; I and Q demodulation. And more. Write for our data sheet on the TCB-14R. There's nothing else like it. Yet.



MIRATEL DIVISION • BALL BROTHERS RESEARCH CORPORATION • 3600 RICHARDSON STREET • NEW BRIGHTON • ST. PAUL, MINNESOTA 55112

Circle 10 on Reader Service Card

J A M P R O

BATWING

VHF TV ANTENNAS
FOR CHANNELS 1 and 3



JAMPRO now offers this time proven antenna assembled and pretested for your specific use. Our advanced manufacturing techniques, combined with the highest quality components, assures the highest degree of trouble free performance available, and at the lowest cost. Here are just a few of the outstanding features:

- Improved mechanical design reduces antenna weights (which result in lower erection and supporting tower costs.)
- Teflon insulated solid brass connectors.
- Stainless steel hardware.
- Copper jacketed 7/8" interbay cables.
- A wide variety of antenna gains.

For full information and specifications write for free brochure.

J A M P R O

ANTENNA COMPANY

A DIVISION OF COMPUTER EQUIPMENT CORPORATION
6939 Power Inn Road, Sacramento, California, USA

the CATV operators what programs should be (1) protected and (2) deleted.

Several CATV operators viewed the foregoing case as a convenient vehicle to forestall and delay complying with nonduplication requests. If the TV station's notices did not contain very specific information dealing with every program to be protected and deleted, it took no action. Later in *Willmar*, the Commission decided that it would not abide such tactics.

Willmar Video case—Is a TV program schedule adequate notice?

(1) On March 7, 1968, the Commission, by its Decision (FCC 68-219) in Docket 17604, in *Willmar Video, Inc.*, ordered the latter to cease and desist its violations of 74.1103 and to provide protection to KCMT-TV, Alexandria, Minnesota. This was a hearing case; the facts follow.

(2) In October 1967, the Hearing Examiner issued his Initial Decision (FCC 670-53) finding that KCMT had given adequate notice and ordered Willmar to cease further violations. The Examiner noted KCMT had sent its program schedule with underscoring of the programs to be protected. The notice did not mark the programs to be deleted.


(3) Willmar appealed the Examiner's ruling and argued (for the first time) that KCMT's notice was deficient, because it failed to list the programs to be deleted. The Commission observed that KCMT's program schedule (underscoring programs to be protected) is sufficient notice of those to be deleted because the latter were all network shows and Willmar knew well the date and time of the shows to be deleted. The real reason for the Commission's harsh ruling here is that Willmar did not respond to KCMT's letters, did not ask for clarification of KCMT's notice, or otherwise show good faith. If Willmar had not been so totally uncooperative, the Commission might well have required KCMT to list the programs to be deleted by date and time and to list them separately from the programs to be protected. Why? The Courts might well reverse the FCC for failure to enforce its rule as written. The Commission's language sheds further light.

In determining compliance with the notice requirements [of 74.1103], the dispositive issue is whether sufficient information has been furnished [by the TV to the CATV] to enable the CATV system to ascertain the program to be deleted without searching through the entire day's schedule of each station carried on the cable. (See Decision, para. 7.)

At no time did Willmar Video request clarification of the notice or give the slightest indication that additional information was necessary or desired.


The CATV system may not be permitted to excuse noncompliance on the ground of a claimed deficiency in the information unless it comes forward with some evidence that a deficiency did, in fact, exist, or that the information was erroneous. (See Decision, para. 8; see also Channel 9 Syracuse, Inc., U.S. App. D.C., case no. 20,843.)

(Continued)

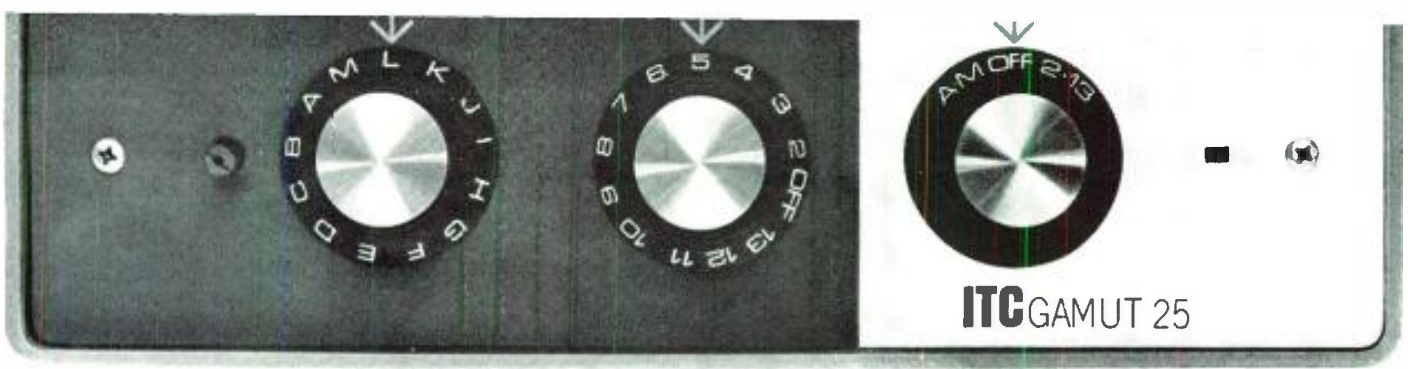

Now that
we've made a name
for ourselves,

we've gone and changed it.

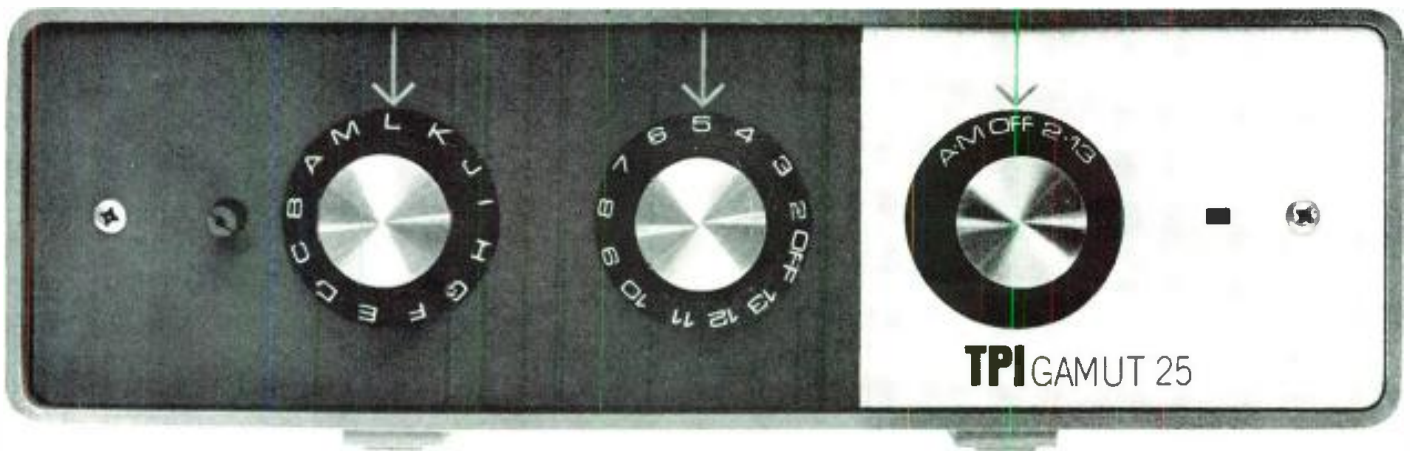

A lot of CATV city slickers (operators in multi-channel urban locations) have come to know International Telemeter Corporation converters as the best in the burgeoning extra-channel CATV business.

From our Gamut 25 to our Focus 12, you get everything you need to clean up cliff-dwelling ghosts. And deliver 25 channels of interference-free reception.

Now, we're putting our all (Gamut 25, Plus

13 and Focus 12) into a new name for us—and a very good name in CATV. TPI. Now—we're part of a growing corporate family, along with ALPHAMATIC NEWS the all-electronic, automated CATV cablecasting service that pays for itself with locally originated news, UPI 24-hour international/national coverage as well as New York Stock Exchange Reports.

So, when you're looking for ITC Converters, look under our new name because...

Starting now, ITC converters will be called TPI converters




For information, write or call collect (212) 421-9665

Television Presentations, Inc., A Subsidiary of Sterling Communications, Inc. 375 Park Avenue, New York, N.Y. 10022

Circle 12 on Reader Service Card

Circle 13 on Reader Service Card →

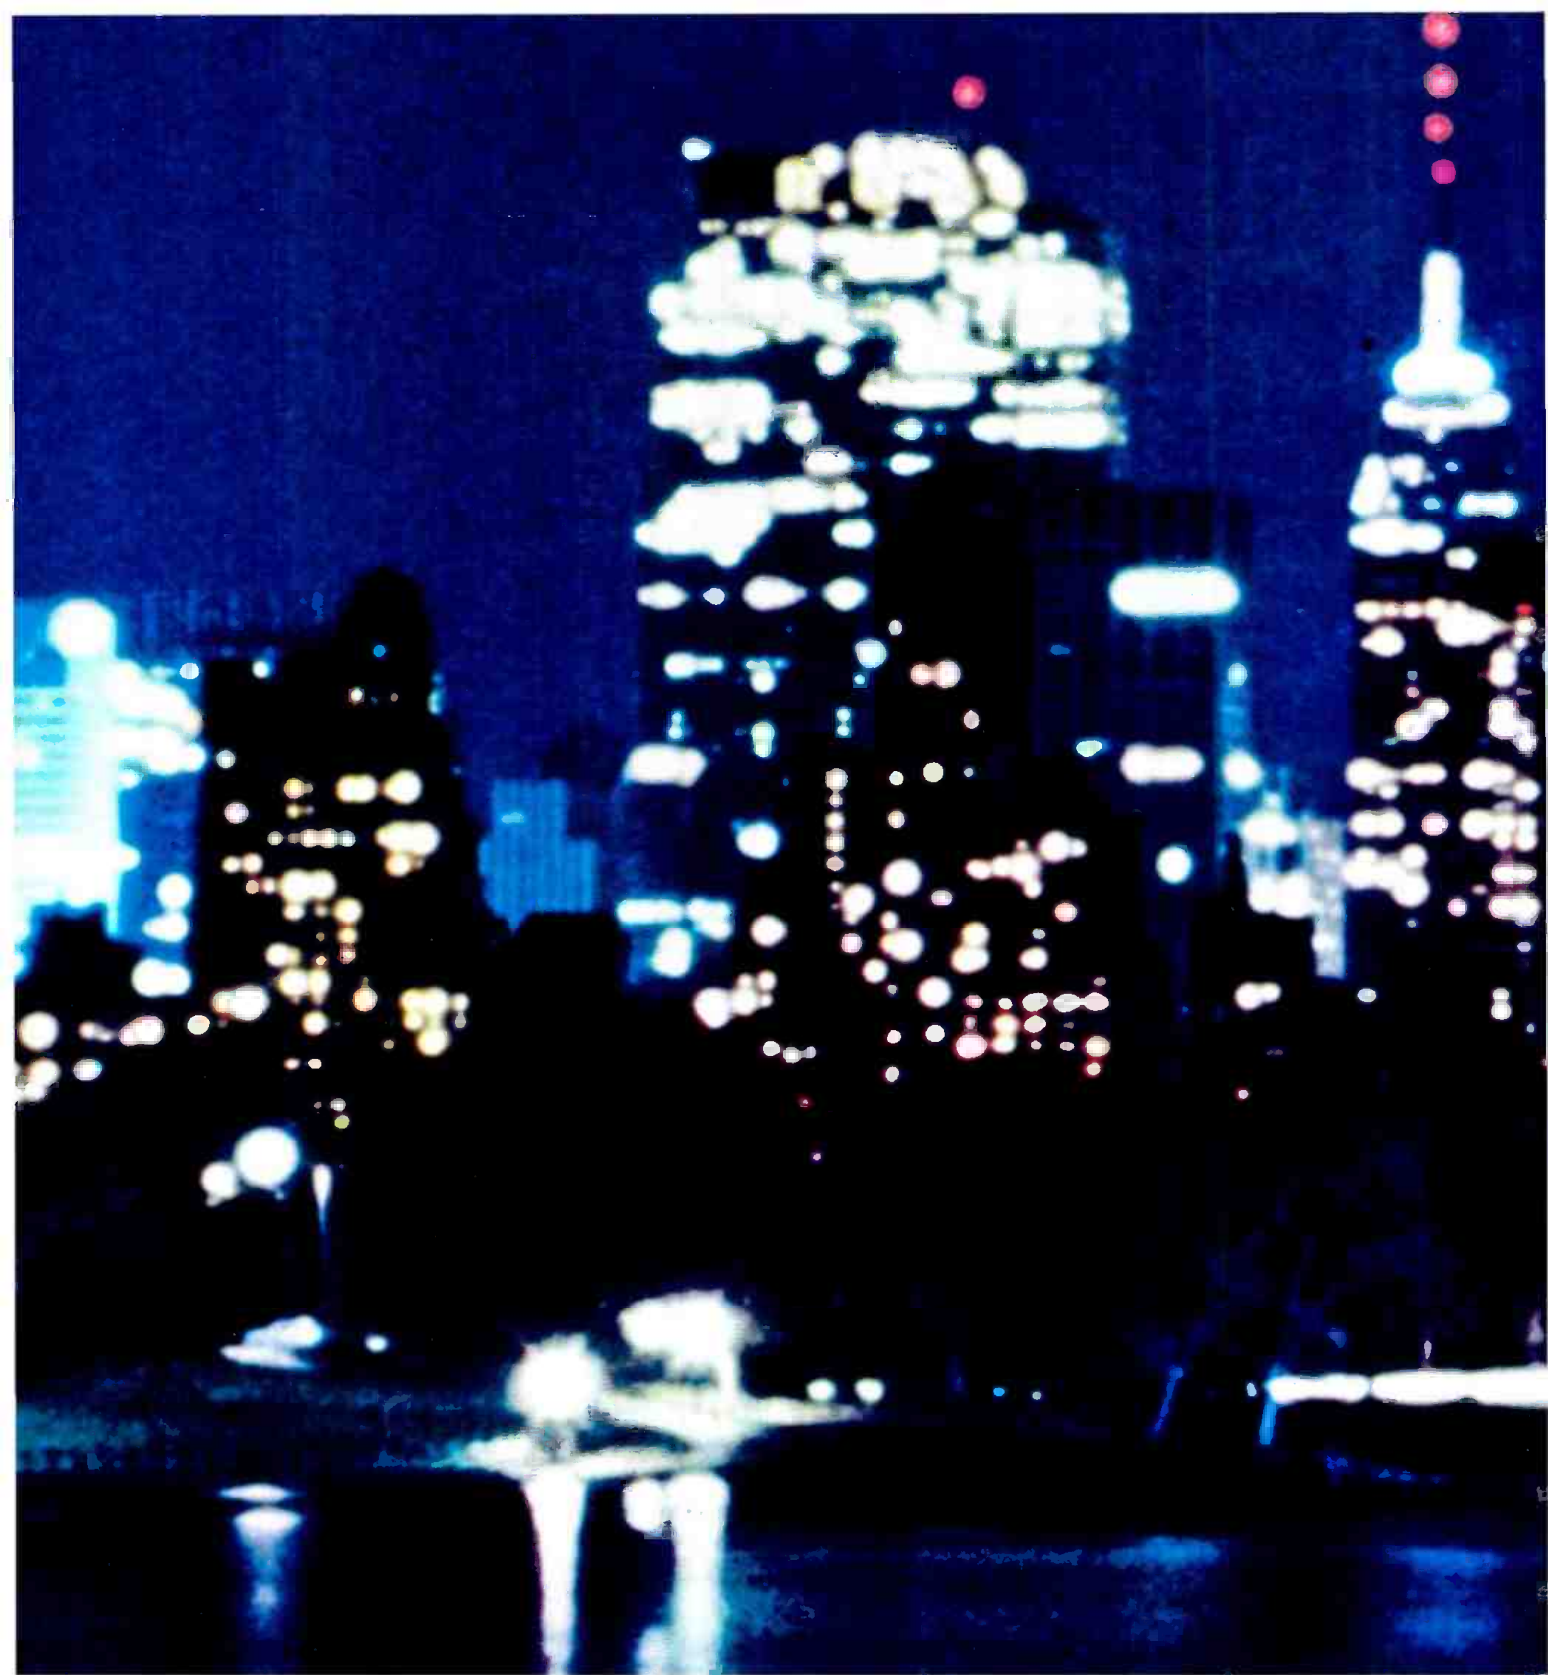

How the East

Today, more than 60% of all the video tape sold in New York is Memorex.

Obviously, we have a rather active sales and service staff. We also happen to have some rather substantial selling points: 78V is durable, reliable, unbelievably

uniform. It doesn't flake off and build up oxide on the heads. It doesn't attract dropout-developing dust or debris.

It doesn't fray, snap, or stick.

And it gives a superior picture. And a superior sound.

That's how we took New York, with a great tape.

We test Memorex 78V at least 37 different ways during production.

We measure its backing, oxide, binder, surface, uniformity, dimensions, abrasiv-



was won.

ity, magnetic properties, and response.

We use over 52 different pieces of quality control equipment, 31 of which were developed by Memorex engineers.


To make sure the tape is indeed a precision tape, we then subject it to 11

different micrographic inspections after production. As you can see, at Memorex, we believe in giving a salesman something to go on.

Memorex Corporation, Memorex Park, Santa Clara, California 95050.

MEMOREX

run the MARATHON and win

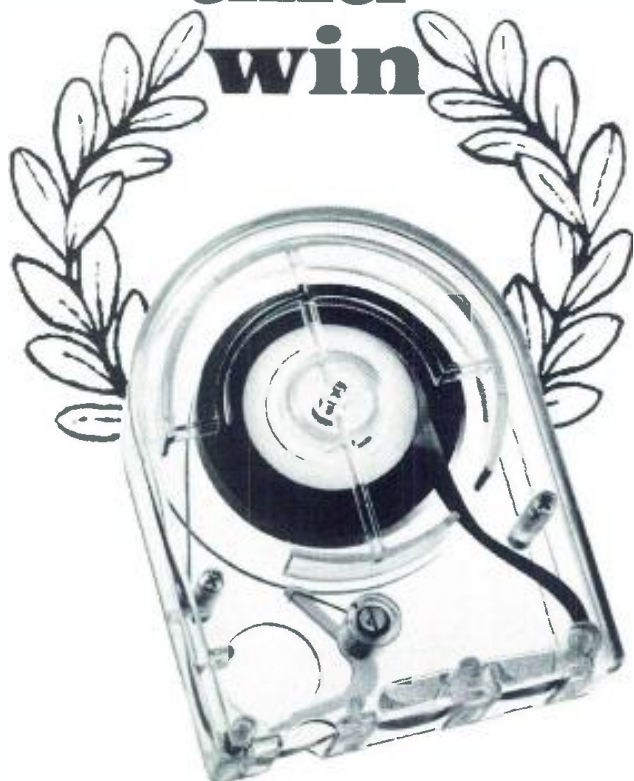

The patented differential hub on this MARATHON continuous tape cartridge provides constant tension at any speed — without special winding. If you're already using high-speed equipment, you can fast-forward wind MARATHON cartridges with no fear of spew-out.

This, plus a precision guide path which assures the best possible handling of your tape, guarantees maximum broadcast quality every time you use the tape, not merely "most of the time." And you'll get considerably greater tape life.

MARATHON cartridges meet all NAB specifications and exceed them where it counts. NAB specifications call for a maximum drive force of 6 ounces. MARATHON cartridges never exceed ½ ounce!

Major cartridge users are running the MARATHON. They're under constant tension, and they love it. In every detail of design and performance, MARATHON cartridges demonstrate quality which assures MARATHON performance. Can we send you complete engineering specifications and prices today?

MARATHON

BROADCAST EQUIPMENT SALES CORPORATION

57 NORTH PUTNAM ST. • DANVERS, MASS. 01923 • (617) 774-6066

Circle 14 on Reader Service Card

← Circle 13 on Reader Service Card

mining and listing programs to be protected and deleted upon the TV station seeking protection. Technically, all CATV systems should be prepared by now to provide this protection upon request; that is, they should have the "switching" equipment installed and operable. It should be emphasized that, contrary to the rules proposed in April 1965, only "same day" protection need be afforded; that is, the CATV may provide programming, duplicative of the local stations, any day prior or subsequent to the day of its telecast by the latter.

Section 74.1103 (g) (exceptions to nonduplication rule) provides that the CATV system need not delete a program if:


- (1) In so doing, it would leave available to subscribers less than two network programs;
- (2) It is offered by the network in prime time (6:00 P.M. to 11:00 P.M., Eastern time) and is broadcast by the station requesting deletion, in whole or in part, outside of what is locally considered prime time;
- (3) The time of presentation is of special significance (e.g., a speech), only simultaneous non-duplication protection need be afforded;
- (4) It is offered in color but will be broadcast in black and white by the station seeking protection.

The provisions of the Rules, the *First Report* and *Second Report* seem clear. First, the TV station must request protection; second, the CATV must cooperate and give a list of the TV signals it carries; and, third, the TV station has the burden of giving the CATV a list of the programs (1) to be protected and (2) to be deleted. The problem: Many CATVs claim that they have never been given a proper list (under 74.1103(f)) of the programs to be deleted; thus, some CATVs have refused to comply and complaints have been filed with the FCC. The question: What form of notice, as to programs to be deleted, is required of the TV station?

Analysis of Cases Concerning Notice Buckeye Case

There have been numerous cases interpreting Section 74.1103 of the Rules; most of the cases concerning interpretation of the "notice" provisions (74.1103 (f)) have dealt with other provisions of Section 74.1103 as well. For example, *Buckeye Cablevision, Inc.*, 11 RR 2d 668 (1967), concerned a general request for waiver of the non-duplication (Section 74.1103) provisions of the Rules. While ruling against the request, the Commission found also that the advance schedule, submitted by the TV station to Buckeye, was sufficient of the programs to be protected but in some instances was inadequate notice of the programs to be deleted. The Commission noted that any deficiencies on the part of the TV station's notice would alleviate the CATV's responsibility to protect. In other words, the Commission placed the TV industry on notice; it would require the 74.1103 "notices" to be specific enough to show

NEW television waveform monitor

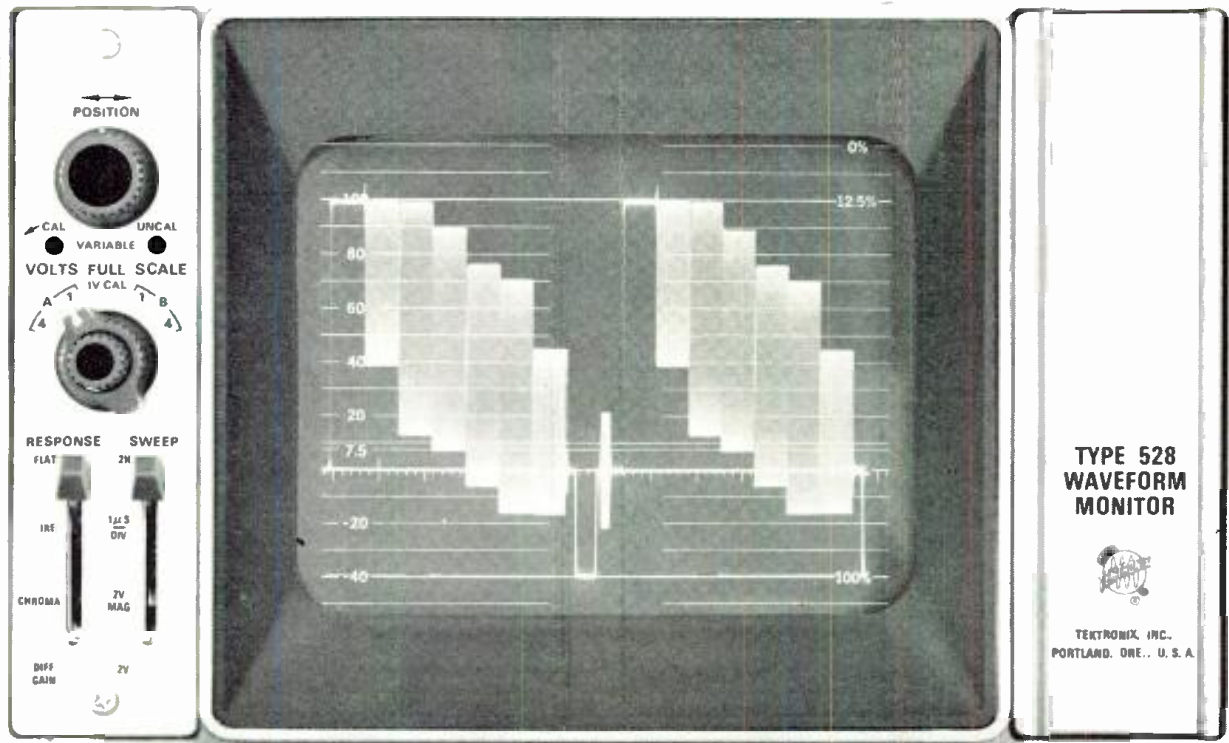

3/4 Actual Size

- compact size with large 8 x 10-cm display area
- picture monitor output
- YRGB and RGB inputs
- 1-volt and 4-volt full scale deflection factors

The new Tektronix Type 528 solid-state Waveform Monitor is ideally suited for monitoring waveforms from camera outputs, video system output lines, transmitter video input lines, closed-circuit TV systems and educational TV systems. This compact instrument requires only 5 1/4-inches vertical and 8 1/2-inches horizontal mounting space.

Either of two video inputs, selectable from the front panel, may be viewed on the 8 x 10-cm screen. The video signal being displayed is provided at a rear-panel connector for viewing on a picture monitor.

Calibrated, 1-volt and 4-volt full scale deflection factors provide convenient displays of typical video and sync signal levels. A variable control provides uncalibrated full scale deflection factors from 0.25 volts to 4.0 volts. FLAT, IRE, CHROMA and DIFF GAIN vertical amplifier response positions permit rapid observation and measurement of waveform characteristics. A slow-acting DC Restorer maintains a constant back porch level despite changes in signal amplitude, APL or color burst and may be turned off when not needed.

Sweep modes are: 2 V SWEEP (two field), 2 V MAG SWEEP (expanded two field), 2 H SWEEP (two line) and 1 μ s/div SWEEP (calibrated sweep with accuracy within 3%). Internal or external sync is selectable. Provision is made for YRGB and RGB displays.

This lightweight waveform monitor converts to a portable unit for field service applications by simply adding an optional protective cabinet. An optional Rack Adapter permits side-by-side mounting of 2 Type 528's.

Your Tektronix Field Engineer will be happy to demonstrate this new solid-state waveform monitor on your premises at your convenience. Please call him, or write: Tektronix, Inc., P.O. Box 500, Beaverton, Oregon 97005.

Type 528 Waveform Monitor	\$800
Rack Adapter for mounting 2 Type 528's side-by-side (016-0115-00)	\$ 85
Cabinet, provides protection for out-of-rack applications (390-0018-00)	\$ 30

U.S. Sales Prices FOB Beaverton, Oregon



Tektronix, Inc.
committed to progress in waveform measurement

Circle 15 on Reader Service Card

Don't overlook the importance of
quality
audio



Hundreds of these units are being used by TV & Radio broadcasters. Give your subscribers the same professional audio quality they are used to. An extremely versatile audio mixer for CATV local origination. Can accommodate up to 14 microphone and line level sources. **Model A-15 — Only \$495**



A generous audio control facility to handle live local origination plus audio pre-production chores. Add live narration with background music to local slide or film programs. Produce commercial and public service programs and announcements on tape for later release. It's also portable for remote broadcast use. **Model AC-155 Audio Control Center — Only \$1195**

SEE ALL OF SPARTA'S NEW LOOK!

Write or call for complete product brochure.

SPARTA
ELECTRONIC CORPORATION
A DIVISION OF COMPUTER EQUIPMENT CORPORATION
5851 FLORIN-PERKINS ROAD
SACRAMENTO, CALIFORNIA 95828
(916) 383-5353

Circle 16 on Reader Service Card

Neither in hearing nor pleadings did Willmar offer any of the above; moreover, Willmar was chronically silent.

(4) On November 8, 1968, the Commission issued a further Order (FCC 68-1090) in this case. It seems that, between its March Decision and November 1968, Willmar failed to comply. In the November 1968 Order, the Commission buttressed its March Decision as follows: (a) the Commission conceded that "KCMT did not at all times fully discharge its responsibility" since KCMT frequently failed to state "the time" of the programs to be deleted—thus, the Commission indirectly conceded that the mere provision of its program schedule without clearly marking the time of shows to be deleted may be inadequate notice; (b) the Commission noted that, on September 20, 1968, long after the March Decision, KCMT gave a new notice listing, in two columns, the date and time of programs to be protected and to be deleted.

Thus, after two years of pleadings and hearings. The Commission has redefined its original position in this case and issued an Order which could withstand appeal to Court. In sum, the Commission has said:

Whatever the form of the notice, it must give the date and time of the programs to be protected and to be deleted; and.

CATVs must evidence some good faith, not ignore requests for protection, ask for clarification where needed, and the like.

It seems clear, under the rules as written, a CATV system can still demand real specificity of notice. It appears that:


(1) provision of the TV station's program schedule, properly marked, is adequate notice of the programs to be protected, but

(2) somewhere on the said schedule or attached thereto, the TV station must give a list of the times of the programs to be deleted. (Naturally, the CATV should give the TV a list of the stations it carries.) Conduct (or silence) like Willmar's is not recommended. If the notice seems inadequate, the CATV should communicate such fact to the TV and ask for clarification. The CATV can make the TV be specific. If the TV fails to do so, the CATV can stand on its rights for a list "of the date and time" of the programs to be protected and deleted. Either the Commission or the Court will vindicate the CATV. If the CATV has evidenced good faith, it need not fear. Willmar did not. Thus, even though KCMT's notice originally was inadequate, the Commission held against the CATV; Willmar did not go to Court; KCMT subsequently gave a proper notice, and the Commission issued a legally buttressed opinion a month thereafter.

In brief, the CATV should require the TV to give specific notice and keep asking (in writing) for some until it is given. If in doubt, consult competent legal counsel.

BM/E

It's Audio's
lube tape that
I go for.*

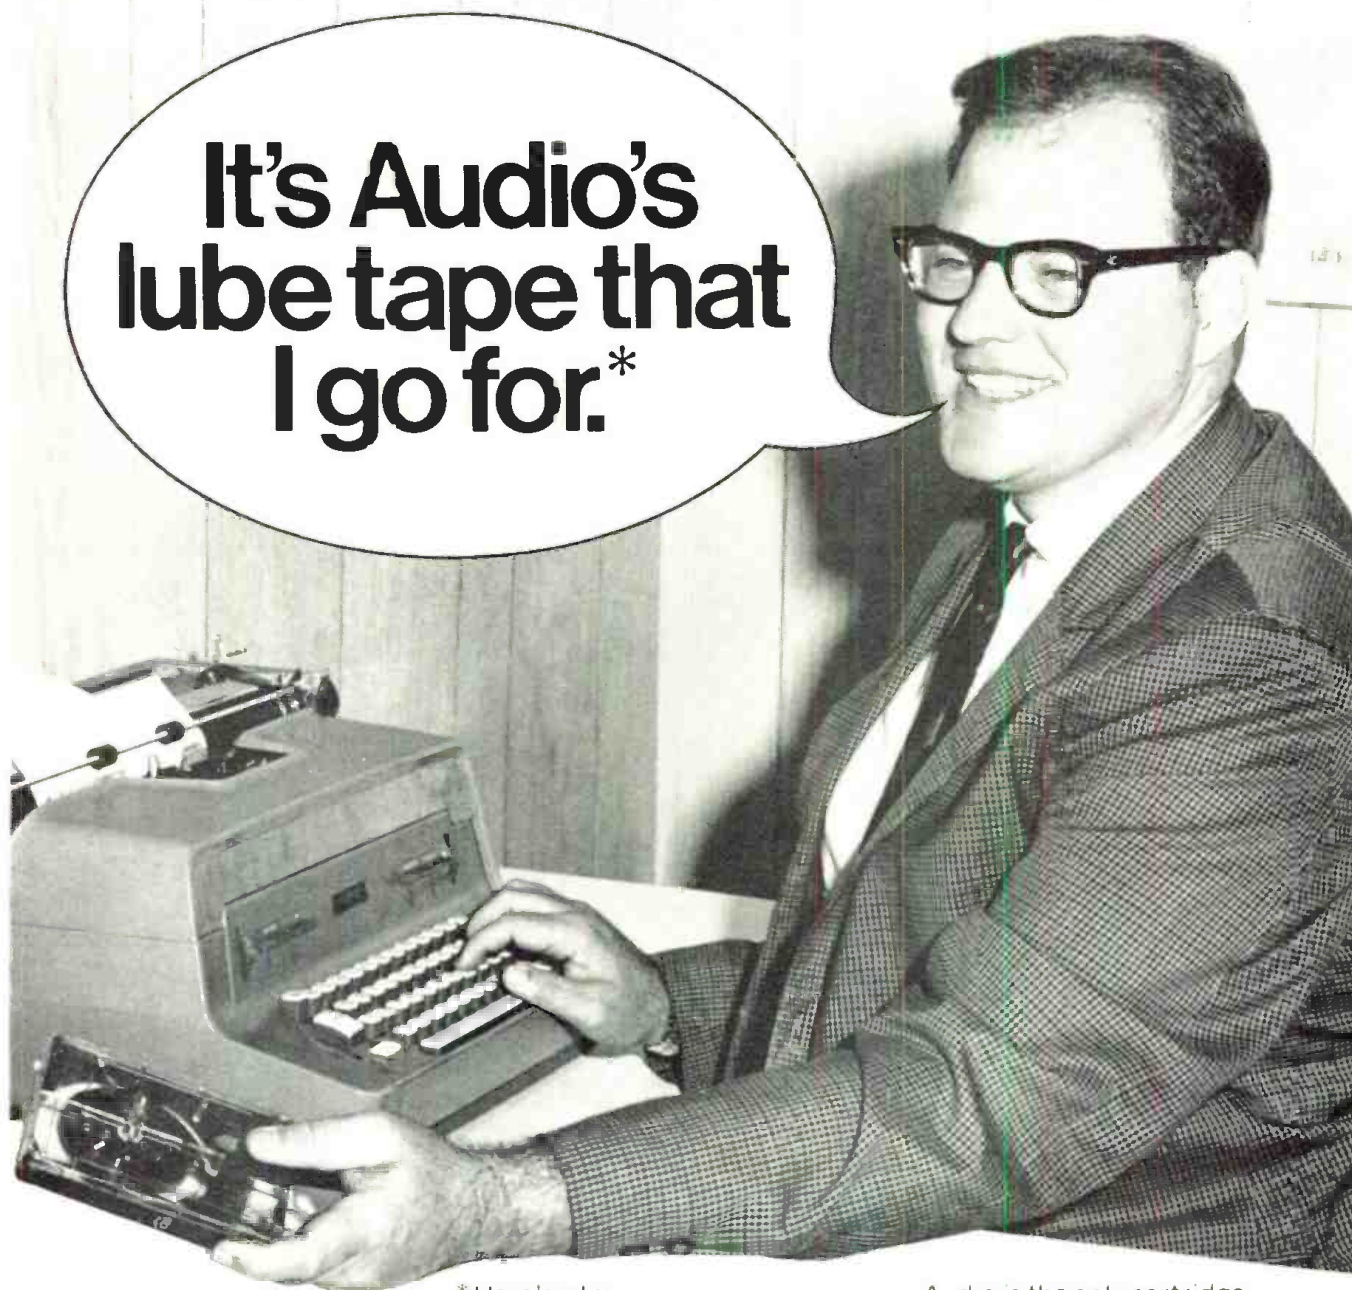

*Here's why:

The lubricated coating is permanently bonded to the base. Can't wear off and cause jamming; won't dirty heads and capstans. It provides excellent high end response and signal-to-noise ratio. The long wear, high temperature binder won't soften or gum up heads.

Very low abrasion properties reduce head wear and premature failure, assures smooth tape motion with negligible wow and flutter.

Circle 17 on Reader Service Card

Audio is the only cartridge manufacturer who also makes tape. (We are the largest supplier in the world.) So, you can be sure our cartridges and our tape match each other perfectly. But regardless of cartridge make, Formula 17 is the best tape you can use.

Why not find out about Audiotape Formula 17 for yourself.

audiopak[®]

Audio Devices, Inc.
A SUBSIDIARY OF CAPITOL INDUSTRIES, INC.
235 E. 42nd St., New York 10017



You're
looking at
television's most
versatile
camera...

TeleMation's TMC-2100:


- Operation may be self-contained or driven from external control equipment. Select mode of operation with the flip of a switch.
- Six different TeleMation control devices to work with the TMC-2100.

- Four internal sync options (plug in modules) including: crystal/ drive, 2:1 interlace and EIA.
- Separate mesh vidicons may be installed without modification. 800-line resolution guaranteed

- Portability — Easy (permanent) conversion to viewfinder model — Custom mounting equipment — Single-cable operation.

Versatility is only one characteristic of the TMC 2100. Performance, Reliability, Quality are a few of the others. A full broadcast viewfinder camera (less lens) costs as little as \$2,495.00. Basic random interlace viewfinder camera is \$1,895.00; non-viewfinder camera \$1,295.00.


Find out more about our low-cost, versatile television camera. Write or call for free brochure.

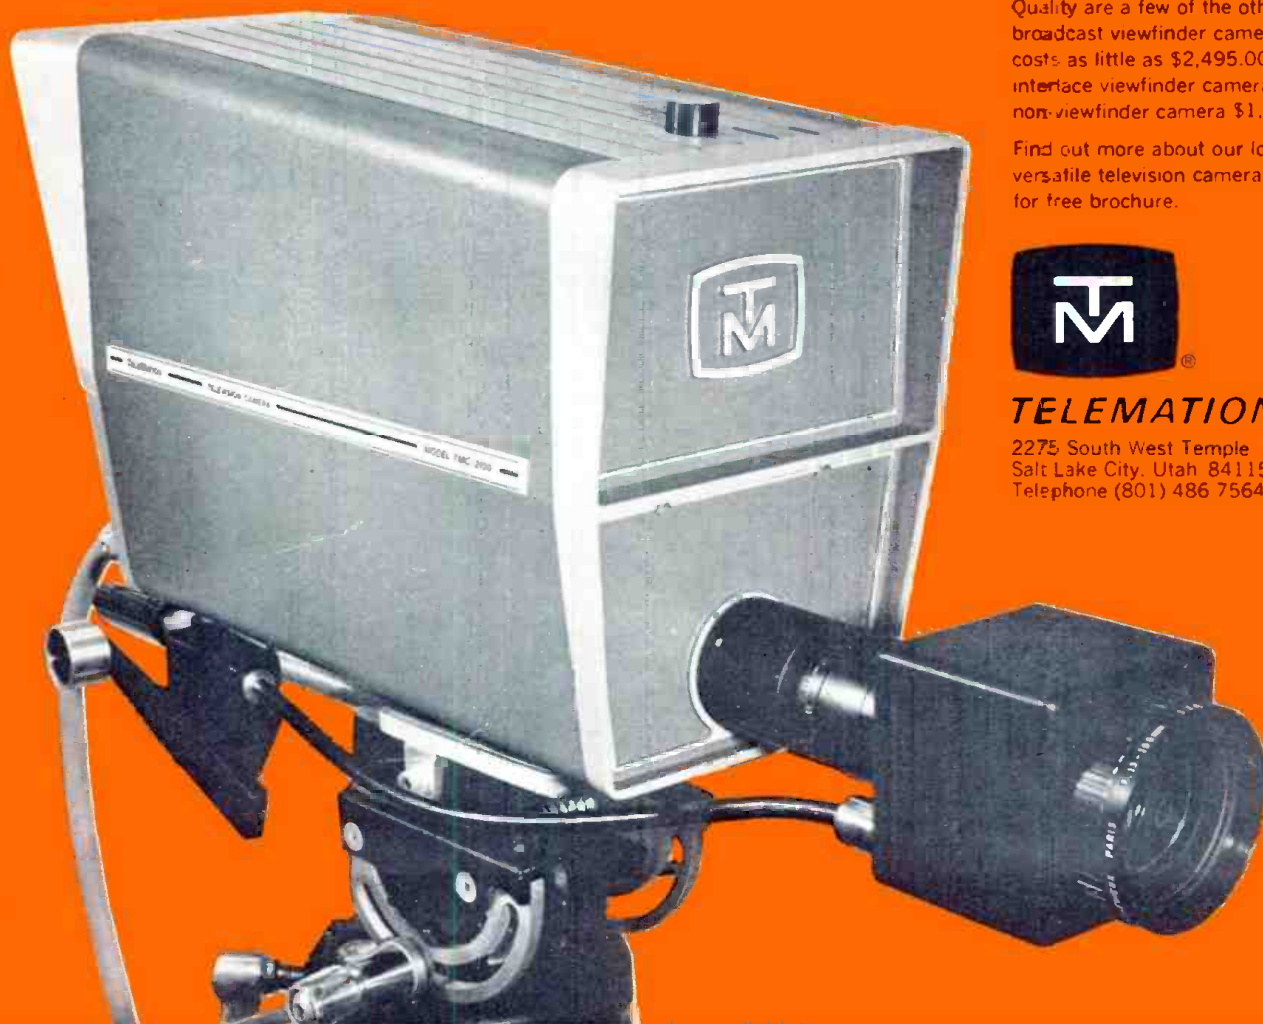

TELEMATION, INC.

2275 South West Temple
Salt Lake City, Utah 84115
Telephone (801) 486 7564

NAEB—Showcase And Forum for Educators

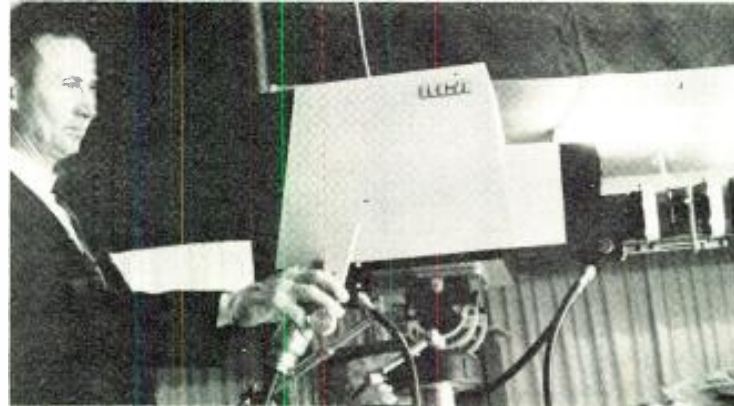

BM/E Photo

Single-vidicon color camera by RCA has 250-line resolution.

How to get money and how to spend it took up most of the time of NAEB Convention goes. To be sure, ubiquitous placards announcing the fifth freedom managed to keep the theme, freedom from ignorance, supraliminal but finance was the consuming topic.

Money matters started with the 9:30 A.M. keynote address by McGeorge Bundy, president, Ford Foundation, and were stressed again at lunch by Nicholas Johnson, FCC Commissioner. The following day the U.S. Office of Education explained at separate radio and TV sessions the ground rules for allocating its \$4-million to new and old applicants (seventy-three old applicants are already on file with requests for \$33-million). Ford's TV program coordinator, Davis David, reflected on the foundation's TV support program and

the Corporation for Public Broadcasting revealed its general thinking about spending its initial seed money of \$5-million.

Later, a panel of station experts devoted an afternoon to fund-raising techniques which included support from viewers, support from foundations and corporations and special fund raising events. The Council for State Educational Telecommunications Authorities (CSETA) were told by Donald Taverner, WQED, Pittsburgh, Pa., how to get state, and local government support. Robbing a bank was the only avenue not explored.

Other than Money

Not everything was money. Many sessions labeled "Utilization of . . ." dealt with evaluation of programming and equipment.

Techniques for serving ghetto schools and communities were explored in depth. A resolution calling on NAEB members "to initiate action leading to additional programming that will significantly meet the needs of Black Americans" was passed at the annual business meeting.

There was no shortage of ways to spend money at the convention. The exhibit floor showed thousands of hardware exhibits (see exhibits).

Hard reappraisal of instructional technology on the closing day revealed that most use of TV in schools falls far short of its potential in improving quality or reducing cost of instruction.

Other highlights included:

- A speech by HEW Secretary Wilbur Cohen in which he called much of current commercial TV and radio "pure unadulterated trash" and cited social inequality and discrimination as the most crucial domestic problem. Cohen asked the communicators to respond to inequality and six other vital national issues: poverty, the future of education, inadequate health care, the poor quality of our environment, and the communications gap between races, the young and the old, and the poor and the well-to-do.
- Emphasis on hiring more personnel from minority groups.
- Need for some good public relations drives to improve the image of educational television.
- Need for public broadcasting to

BM/E Photo



Norelco color stage featured pretty teachers, Little Shaver camera and other gear.



play a valuable role in the political process at all levels of government (Bundy). Public broadcasting "was absent without leave" during the recent presidential campaign said Bob Squire, past director of television for the Democratic National Committee. (Among the exceptions was KCTS-TV Seattle which ran a telecourse on local issues.)

- Awards by Visual Electronics (\$1000 to an outstanding student, Zbigniew Koryzma) and *Reader's Digest* (six \$1000 awards for outstanding programming) to KVIS, Sacramento; WITF, Hershey; KQED, San Francisco; KETC, St. Louis; WENH, Durham, N.H.; KUON, Lincoln, Nebr.

- Election of Dr. George Bair, education director of the South Carolina Educational Television Commission to chairman of the Executive Board of Directors, NAEB.

Dividing Small Funds Adds Problems

The hiatus in funds between the end of one federal program and the commencement of its successor has complicated the grant making process. No longer can applications be processed as received since the backlog exceeds the new supply of money. Congress authorized \$12.5-million for the current year but appropriated only \$84.375-million (of which \$375,000 will be used for administration). To help establish priorities in making grants the U.S. Office of Education has appointed 13 consultants. Further, since the new statutory limit per state is 8.5 percent of the annual appropriation (or \$340,000 per state), the Office of Education will consult with State educational television and radio agencies. Thus many opinions will influence how grants are made.

New application forms for grants under the current authorization should have been in the hands of those seeking funds by December 30th of last year, according to Ray Stanley of HEW.

Although the recent emphasis of Ford and CPB has been on establishing a national network for public broadcasting (at reduced



BM/E Photos

(Left, top to bottom) Sylvania stage showed off mono cameras and consoles, color receivers. Visual unveiled new color camera, to be demonstrated at NAB. Portable mono camera and shoulder-harness VTR were new Shibaden entries. Spinning color filter with pickup tube of exceptional sensitivity were features of new CBS Labs camera.

(Above, top to bottom) Streamlined mono camera from Raytheon is operated by streamlined model. Standard TV color cameras focused on gals in G.E. color studio. New mono camera is from Norelco.

AT&T rates which will begin this month), both Ford and CPB will make grants to individual stations. Ford currently is supporting programming work at some 17 stations and networks, and announced last October a second phase program of \$5-million for 1969. The largest amount available to a single station in a major city or to a regional net is \$750,000. State networks are eligible for \$250,000 grants. Only series programs are eligible (six, one-hour or ten half-hour efforts). The awards will be made March 12, according to Davis.

CPB will entertain proposals from individual stations for general program grants of up to \$10,000 per station. Similar grants are available to each of the six regional educational networks.

With three Santas to address, all in roughly the same time slot, it has indeed been a season for proposalmanship. Although there were no formal sessions on this at the NAEB, plenty of private advice was exchanged.

Advice offered

Bundy in his keynote address stressed the need for two national public networks (electronic turnpikes), more regional and statewide networks and more quality production centers (rather than the one NET center).

Interconnection possibilities for national and regional program will change the programming schedules of local ETV outlets. Local stations, while supporting the interconnection idea, are mindful and a little apprehensive that funds for interconnection will not be available for local programming. This caused no small amount of small talk in the hallways and across luncheon tables.

Nicholas Johnson stressed that a philosophy will have to be developed to balance allocation of CPB monies between local and national production efforts. Johnson favored user fees as a source of CPB revenue rather than general tax funds or special taxes.

Ideas for raising local funds raised in the panel session included from private sources the studio pass, subscription to program guides, voting privileges and a travel program. Underwriting specific programs by banks, savings companies, insurance companies and utilities is a distant possibility. Good station-sponsor relations can result if stations offer sponsors



Newest IVC color cameras zoomed in on teacher showing off equipment's full studio capabilities.

BM/E Photo




Lightweight Ampex BC-210 cameras fleshed out large and variegated exhibit area covering many aspects of color production.

BM/E Photo



BM/E Photo



(Left) Color camera by Sarkes Tarzian in constant use. (Above, top) Bell & Howell teacher shows how to use color gear for education. (Above) Another Bell & Howell camera focuses on microscope image.



Microscope TV camera adapter by GBC shows off their CCTV camera's capabilities.



MTI's rugged camera/microscope features jitter-free performance.



BM/E Photos

(Top to bottom) Microscope field is subject for this GPL closed-circuit camera Panorama of mono cameras and receivers was engaging exhibit by Packard-Bell. New mono camera capabilities were shown off by Panasonic. New control console by TeleMation handled cameras zoomed in on model electric train layout.

help in their internal instructional or training programs. Among special fund raising events, the auction in which local merchants contribute products for sale over-the-air is popular.

Stimulating Dull TV

Videotapes and films of many exciting individual programs were played for the stimulation and approbation of convention goers (ghetto programming, black programming, game simulation). One session tried to evaluate use of total instructional technology. Somber conclusion was that instructional technology has largely failed to measure up. Dr. William Paisley, director of ERIC, Institute for Communications Research, Stanford University, in recapping some four-hundred evaluation reports, reminded the convention that while in general, ITV instruction has been as good as a classroom teacher, it has been no better. Two-way feedback between teacher and pupil is a vital weakness despite pretesting of programs.

No real measure of actual classroom use of ITV is being made, and Dr. William Lybrand of American University suspects it is lower than generally considered because of poor program quality. Team teaching (classroom teacher plus TV teacher) is a farce if the classroom teacher has to be primarily a disciplinarian to keep the students from cutting up in front of the "talking face on the boob tube."

Cottage-type productions have to go, Lybrand predicted. Availability of superior programs forces new roles on the superintendent, principals and teachers. Since central distribution within a district is a necessity, superintendents rather than principals will have to be in charge of scheduling. Improvement of quality requires new understanding between the studio teacher and the classroom teacher; the pro-

ducer and the educator. Most strategies of involvement to get needed cooperation have failed so far, said Lybrand. If the school board insists on a verifiable return on investment, problems are further magnified.

One obvious national need is for more individual prescribed instruction said Dr. Andrew Molnar of HEW, which some teachers resist. They would rather provide information in a classroom situation than direct students to materials available from resource centers. A necessary step for progress toward wider acceptance of instructional systems is to imbue teachers with a new set of values, i.e., tradeoff security provided by autonomy in classrooms for less drudgery in detail which is possible with systems.

Dr. George Hall of NAEB at an earlier session described the problem as "freeing teachers for adaptive and reinforcement pursuits." Can teachers be encouraged to accept the goal of directing self-study in exchange for a reduced responsibility in determining content? Hall said the book as a mediating help threatened the lecturer in the 13th Century. The book is now accepted, why not TV mediation, he asked.

Technical Sessions Respond to Needs

Stanford University is doing pioneering work in the field of ITFS talkback. With the technology developed and an application pending with FCC, SU has a radio talkback system ready to go any time the commission gives the word.

Presenting a paper entitled "The Stanford University Proposal for ITFS Talkback Channels" at NAEB, Al Morris, chief engineer of Genesys Systems, stated the case for radio talkback. He said

Continued on page 33

ONE MAN; ONE CAMERA, THE IVC-100 □ Internet Television Productions, Inc. of Laguna Beach, California in association with San Clemente Cable TV Co. and Leisure World (a Rossmore development) desired to produce live pick-up of the San Clemente Surf Club Competition, the Hollywood Hackers Golf Tournament, plus an award banquet for later cablecast to 15,000 Southern California homes. □ Problem? You bet. □ This meant surf, turf and filet mignon—lighting conditions from one extreme to the other—fixed and remote camera positioning—indoor, outdoor and studio locations. □ The IVC-100 color camera and IVC-800 video tape recorder was the only system that could do the job and deliver top-notch color fidelity and registration at realistic costs. □ In three days of bouncing from truck-to-turf, not a single operating adjustment had to be made by the lone operator. Now, this same performance is in pocketbook range of every cablecaster, large and small. See the reverse side for details on the IVC-100 color camera and IVC-800 video tape recorder.



SURF...TURF...AND FILET MIGNON



**IVC's INNOVATIONAL
DESIGN BRINGS THE
VIDICON TO LIFE IN THE
IVC-100 COLOR CAMERA.**

New design ideas in optics and electronic design have maximized performance. Reduced "lag", high stability, and better registration are the result. The IVC-100 with built-in sync generator and encoder is transportable (one man); easy to maintain and set up. It can be used for remote taping, multiple camera pick-up and film chain functions with proper options. Price—\$14,000.

**IVC's DESIGN ECONOMY
MAKES IVC-800 SERIES
RECORDERS THE ONLY SELF-
CONTAINED, PORTABLE VTR's
THAT EDIT IN COLOR.**

Frugal design engineering by IVC not only cuts cost but delivers more equipment capability for the investment. The IVC-800's built-in electronic editing feature, for instance, contributes to operating efficiency without affecting compactness, mobility and versatility. The IVC 1" format allows an hour of recording time on a small 8" NAB reel tape—30% less tape is used at an average savings of \$15 an hour. The IVC-800 reproduces high-resolution NTSC-type color pictures, or, wideband monochrome pictures with bandwidth exceeding 5MHz. Stop motion is standard. Slow motion is optional. Price—\$4,200 to \$6,200 depending on options.



675 Almanor Avenue,
Sunnyvale,
California 94086
Phone (408) 738-3900

690 North Broadway,
White Plains,
New York 10603
Phone (914) 761-7820

2200 East Devon Avenue,
Des Plaines,
Illinois 60018
Phone (312) 297-5160






New switcher from Grass Valley handles and previews variety of program sources.



Central Dynamics' effects generators and proc amplifiers were able to produce psychedelic effects to order.

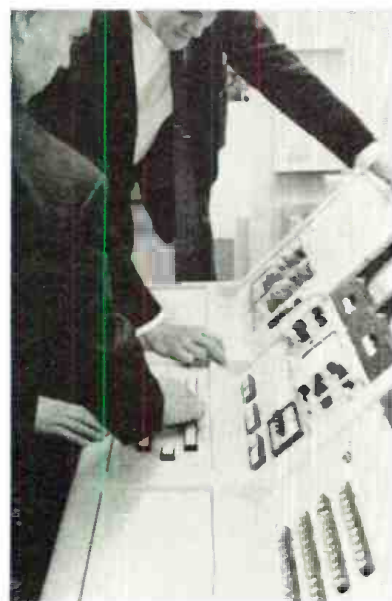

that although it couldn't be proven that students in grade and high schools learn better with talkback systems, it was absolutely vital on college level. [Editors Note: Experts at other sessions viewed talkback as desirable.]

Morris informed those attending that although 70 talkback systems are now in use, the Stanford system is the first ITFS radio talkback system. Stanford rejected the use of telephone lines mainly on the basis of cost, and additionally, radio circuits provide double the frequency response—10 kHz. Cost analysis shows that the radio system will save \$18,700 over a period of ten years as compared with the cost of telephone circuits. Video talkback has been shown to be educationally of little or no value, and has technical kinks because of a lack of channels.



The Stanford proposal incorporates the use of 3 of the 4 MHz spectrum space presently unused at the top of the ITFS band. The proposal would provide talkback channels for each of the 32 video channels and a 1-MHz separation between video and talkback channels. Stanford's test system has shown that an omnidirectional transmitting antenna radiates a signal with a 22-dB signal-to-noise ratio at a distance of 16 miles; 10-ft dish antennas show the same noise ratio at 40 miles. The FCC has indicated that type approval will be required for all equipment intended for ITFS talkback.

ITFS channel crowding in the Los Angeles area has introduced the use of a computer to sort out transmitter location and interference for ITFS co-channel operation. A study of the problem by Hammett & Edison, consultants, of San Francisco also investigated methods of antenna placement for minimum co-channel interference.

One-hundred-fifty school districts conducting 200 courses in the Los Angeles area are now us-






(Above, top to bottom) Alma Engineering had a new effects board in operation. Effects in a suitcase composed a new idea shown by Diamond Power. Ball Brothers displayed a new helical converter in a rack mount.

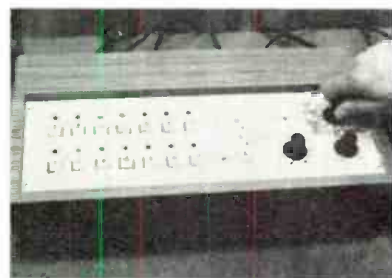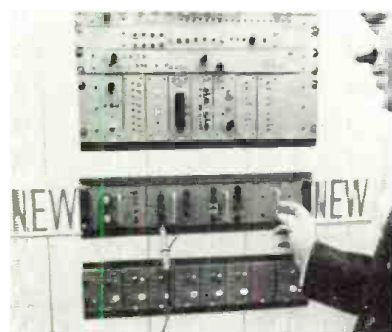

BMVE photos

(Above, top to bottom) Dynair entered the large-scale effects field with this streamlined board. Telemet's new audio distribution amplifier bowed at the convention. Ward Video displayed a compact, simplified effects generator and switcher. Video processor from Vital Industries sharpens up sloppy NTSC signals from helical VTR as shown in unprocessed signal at left, and processed one in right scope.



BM/E Photo:

(Top to bottom) New audio console, the Yard II from Gates Radco, has 12 inputs and 8 mixing channels. Shibaden's automatic tape splicing machine does everything for quad tapes except lick the postage stamps. Solid-State heterodyne system model MA-2H was shown by Microwave Associates. Another heterodyne repeater system, the SRH-2, was shown by Jerrold, is especially suitable for 2.5 GHz ITFS systems. Mark IV 16mm color film processor was shown by Jamieson Film Co.

ing 30 channels assigned by the FCC. The study, conducted by L. Templeton, revealed that there is a need for a minimum of 4 channels per district, or 600 channels. Thus, the 30 channels currently available are serving only 5 percent of the need.

Templeton presented methods of minimizing the shortage of spectrum space by experimenting with antenna orientation and by writing a computer program for tracking down all possible interference from ITFS or other 2500-MHz sources.

The study revealed that a 50:1 separation ratio was needed to give the required 55-dB signal-to-noise ratio for effective operation with omnidirectional transmitting antennas. After experimenting with the positioning of transmitting antennas in the centers of the school districts and in a back-to-back configurations, Templeton found that side-to-side orientation provided by far the best signal-to-noise ratio. This was achieved by positioning the antennas the widest possible distance apart and catty-cornered along the common border of neighboring school districts. The side-to-side configuration provides signal-to-noise ratios of 20 dB for the transmitted signal, 30 dB for the received signal and an additional 10 dB through cross-polarization, for a total of 60 dB—5 dB in excess of the 55-dB requirement.

The computer program was put into action to sort all possible signal sources with respect to each receiver. When the computer detected possible interference a print-out was produced containing interference strength and vector for each receiver. The computer required cards to be prepared containing location, service, signal-to-noise ratio, azimuth-gain pair, etc. of all transmitters in the Los Angeles area that could possibly interfere with ITFS transmission in the area.

Templeton's conclusion is that there is presently no order in ITFS channel assignment procedures. He feels that the FCC should require each applicant to find out what the interference situation is in his own area before granting the use of an ITFS channel. He thinks that the current crowding on ITFS bands both on the east and west coasts points up the need for increased efficiency in their use and that additional rulemaking requiring ITFS applicants to inform the FCC of the extent of channel saturation before considering applications. Templeton also thinks that the use

of translators may ease ITFS channel congestion.

"In what ways can a sound-only medium communicate better than a sight and sound medium?" That's the question Karl Schmidt posed at NAEB's session on "New Developments In Instructional Radio."

Schmidt maintains that radio is better on at least two counts:

- **Cost.** Radio costs 0.5 to 0.1 what TV costs. As associate director for radio at the University Wisconsin, Schmidt reports that their cost of equipping 9 stations with SCA was \$54,000. The UW setup includes telephone talkback, with 118 telephone drops. The cost for the talkback circuits has been \$60,000 over a period of 9 months.

- **Mobility.** Schmidt maintains that radio seems to be better where creative response is required in the listener. People can work and listen while using their imaginations.

He is enthusiastic about the results of the University of Wisconsin program and advocates the use of SCA channels coupled with talkback provisions. He cites transient crosstalk from the main fm channel and the need for "super-critical" placement and tuning of receivers and antennas as major problems.

Illustrating the ability of production to reduce costs, Schmidt stated that two years ago the cost of an SCA receiver ranged from \$125 to about \$300. He now obtains his receivers from Janzak of Stamford, Conn. for \$20 to \$25.

Satellite interconnection is here and it's economically feasible. That's the informed opinion of Edmund Pease, director of systems Research, Foundation for Advanced Communication for Education. Pease states that one hour of satellite should soon be available for \$10.

Citing studies and recommendations by Philco-Ford, GE and Hughes-Ford, Pease revealed some interesting facts about the myriad of variables involved with satellite systems. The Philco-Ford study concerned itself with determining the best methods of getting satellite transmissions to individual school buildings. Three methods emerged: 1) direct broadcast from satellite to building, 2) a limited broadcast system and 3) rebroadcast from central distribution center. The study revealed that the best bargain for the public is the rebroadcast method. Direct broad-

cast to the individual school building is possible but it's the most expensive way of getting satellite signal to school building. The limited broadcast method represents a compromise in cost between the extremes of rebroadcast and direct reception.

The GE study consisted of a computer program for sorting out variables of beamwidth comparisons. Large directional satellite antennas mean limited ground service areas, small ground antennas and small power requirements in the satellite. Making the satellite antenna smaller and omnidirectional increases the satellite power requirements, enlarges the ground service area and increases the size of the ground antenna.

Hughes-Ford makes specific recommendations as to size of antenna and probable cost. The Hughes-Ford study also revealed that there are only certain frequency windows

open for satellite operation because of atmospheric absorption. Estimates of cost range from \$1000 for a 10-ft ETV antenna to a high of \$150,000 30-ft dish. Hughes recommends the use of a 30-ft antenna and draws the line at 10 ft for the absolute minimum size ETV antenna since small receiving antennas on the ground increase intersatellite interference or the effect of orbital crowding.

Pease stated that a few thousand hours of satellite interconnection a year now are economically possible for ETV stations. He pegs the total satellite reception system cost at \$25,000 to \$30,000. (See *BM/E*, March, 1968, page 35 for more information on satellite transmission.)

Pease implores ETVers to make the FCC aware of their satellite needs now because channel assignments soon will become critical.

NAEB Products In the Spotlight

IT WAS A HAPPY convention, as educators from the U.S. and abroad gathered to let their hair down and talk earthy nuts-and-bolts about the latest in educational technology. And there was plenty to see on the exhibit floor as manufacturers pulled out the stops to show off their latest and best, and very often, their experimental gear.

There were some 80 exhibitors on the Sheraton-Park's show floor, and their wares were ogled by more than 5000 visitors—most from out-of-town. The Sheraton was bulging at the seams with conventioners, as were most other Washington hotels within the radius of a 10-minute taxi ride.

Cameras Prominent

Once on the show floor, the visitor was treated to a variety of color equipment rivaled only by the NAB Show. There were full-scale broadcast cameras in all price ranges. Norclco and GE showed their standard lines. IVC unveiled a couple of new versions of its camera, and RCA showed its own 3-vidicon film chain plus a one-vidicon camera that took the convention by surprise.

Using a system of striped color filters similar to that described in

the June, 1968 *BM/E* (p. 42), the single-vidicon RCA PK-701 is tagged at \$6500, while its larger studio version, the PK-730, is slated to sell for \$9850. Because of the system of filter stripes used in the red and blue channels, these new cameras have resolution of 250 lines—not broadcast quality, but more than ample for many CCTV and ITV applications. RCA expects to start deliveries toward the end of the year.

Also new in economy color cameras is the IVC-200, a scaled-up version of IVC's well-known three-vidicon studio camera. Tagged at \$18,500, this broadcast quality camera has a number of extra features including a much larger electronic viewfinder than its predecessors. Standard equipment is a Rank Taylor Hobson Varotal 10:1 lens with local or remote servo-driven iris.

Field-Sequential Bows Again

A potentially low-cost color camera aimed primarily at the medical TV market is a field-sequential system from CBS Laboratories. The prototype camera, complete with spinning color wheel, weighs in at a miniscule 10 pounds and has incredible color sensitivity



BM/E Photos

(Top to bottom) "Anti-gravity" device from ColorTran adds telescoping height flexibility to any studio lighting unit. Bardwell-Macaister showed line of quality lighting systems. Memo-Q lighting control board from Century Lighting provides automation in the studio. Kliegl showed lighting kit in a suitcase.



BM/E Photos

(Above, top to bottom) New Samson "camlink" pan head from Quick-Set is springless camera head mount. Davis & Sanford tripod and head feature full-size camera support at budget price. Slot antenna for ITFS and translators was displayed by EMCEE. Movie/TV sync control was exhibited by Kalarr. Line of TV cable connectors was shown by Boston Insulated Wire.



(Above, top to bottom) Frequency standard master by Tracor can sync studio and remote TV gear. Tele-Cine's "Tele-Tec" videotape editing programmer has single-frame accuracy. On display in Grass Valley booth, Andersen Labs device compensates for delay caused by studio in loop. Movie-to-TV camera sync unit was shown by Eastman Kodak. Super-size film reels are feature of projector exhibited by Technical Material Corp.

at extremely low light levels. The camera has been tentatively dubbed the "Starlight" TV, and the monitor must be a modified monochrome set with a rotating color wheel in front of the screen. CBS is talking seriously about using this camera along with a bioscope for fiber-optic views of the interior of the patient's body. While NTSC conversion circuitry hasn't been announced for this equipment, presumably CBS is working along those lines for the future. Camera price information hasn't been announced.

Also on prominent display was Visual's new color camera entry—a broadcast-quality camera using three Plumbicons. It was displayed but not demonstrated; there are a few minor engineering changes still to be made, and the camera will be demonstrated at NAB.

A variety of videotape equipment was in constant use—representing virtually all price scales—from about \$1000 up. Helical formats were predominant, since this is the major format used in ITV. The helical machine is so prevalent among ETV users, in fact, that an entire technical session was devoted to user results. While this meeting divulged no great surprises, a large number of users polled used higher priced helical recorders in preference to the low-cost budget machines.

Among some of the other brand-new products shown for the first time were these:

- a monochrome version of GE's light valve large screen TV projection system
- lead-oxide vidicons from GE
- a zero studio delay system by Anderson Laboratories
- heterodyne repeaters from Jerrold for relaying 2500 MHz
- a carrel system from Jerrold capable of receiving 30 rf channels via a single coaxial cable
- a mechanical tape editor and thumbwheel dial access system from Shibaden (plus numerous VTRs shown for the first time)
- a video hard copy printer from Visual
- a new adjustable lighting fixture from Colortran

There was something on the exhibit floor for everyone—low-cost equipment, high-priced gear, total systems, turnkey operations, consultants, engineering services. In front of the Sheraton-Park, mobile vans by Sylvania and Ampex added a note of versatility to ETV system capabilities. Some of the convention's standout features are highlighted on these pages. **BM/E**



The BC-210 is a streamlined, compact package.

Compact Studio Camera Simplifies Colorization

Even a wispy secretary can haul the ultra-thin cable for this two-tube camera—the studio version of the portable BC-100 which has already had a rigorous baptism of fire. The camera head is small and light enough for easy mobility, and it's tagged about 1/3 lower than conventional color cameras. Is this the harbinger of the future?

BROADCAST COLOR CAMERAS must produce an adequate luminance image for good monochrome compatibility along with accurate color information reproduction in the image for color viewers. Conventional cameras do this by using four image tubes, one of them providing the luminance channel.

A new approach to this problem is to take advantage of modern field-storage devices to minimize the complexity of the chrominance signals needed to form the composite color signal. The two-tube BC-210 uses one Plumbicon tube as a full-bandwidth luminance channel and a second Plumbicon as the alternate red/blue field channel. The sequencing of the fields is done mechanically

through a rotating filter synchronized to the vertical rate. The alternate red/blue fields are channeled through a field delay device. The combination of the delayed path and the direct path produce the full red/blue information for each field. The green signal is obtained through subtractive matrixing between the red/blue signals and the luminance channel.

Portable Color

The problem of making broadcast pictures with just two tubes was solved in the BC-100 design. Taking advantage of the compact optic and yoke assembly layout in the two-tube arrangement, the resulting BC-210 is a giant step toward streamlined camera design. With no microwave operation to consider, the BC-210 is greatly simplified compared to a hand-held camera. Addition of two coaxial cables and a few control wires for iris, cue, talkback and sync lock removed the need for multiplexing.

The use of only two imaging tubes makes registration at the camera an easy task. Every tube that is eliminated in a color camera results in 10 fewer setup controls. The use of a small slave sync generator at the camera head eliminates all

clamp timing and cable length problems associated with pulse timing, and also provides a correctly blanked viewfinder picture.

The Two-Tube Concept

The studio BC-210 was designed using the building blocks proven in the original development of a portable two-tube color camera. Compared with three- and four-tube cameras, the two-tube system is relatively simple. A two-way beam splitter separates light from the zoom lens into two "bundles." One bundle is presented to the luminance Plumbicon tube; the other passes through a simple revolving red and blue filter which presents the chrominance Plumbicon tube with red and blue sequential fields at a rate of 30

Why Two Tubes?

With manufacturers vying to reduce camera costs (\$75,000 and more for conventional studio models) and camera size (150-200 pounds, plus mounting equipment and heavy cable) the approach taken by Ampex is a major challenge to the three- and four-tube design of traditional cameras.

The design goal was to develop a high-quality color camera that is smaller and lighter, easier to set up, operate and maintain, and less costly than previous cameras. These standards, it was felt, would encourage multi-camera networks, stations and production houses to incorporate the new camera into existing color facilities.

The resulting BC-210 broadcast studio color camera is: small (about 50 pounds without zoom lens); simple to set up, operate and maintain; low-cost (\$50,000 compared to \$75,000 for big studio cameras) and reliable (proven in on-the-air success of the back-pack BC-100 two-tube camera).

Promising work on a two-tube simultaneous luminance and sequential color camera had been done by Dr. William Hughes of Oklahoma State University. Dr. Hughes proved the validity of the concept in 1961. His camera used image orthicon and vidicon tubes, however neither had all the characteristics desirable for the system. It also depended on vacuum tube amplifiers and on magnetostrictive field delay lines which were below broadcast standards. But by 1966, when Ampex began serious work towards entering the color camera market, some of these limitations were not as prevalent, and others had been overcome.

The impetus to begin work was provided by the American Broadcasting Company, which approached Ampex with a request to design and develop a portable broadcast quality color camera that could be used by a single operator. Subsequent research, development and engineering resulted in the BC-100, dubbed "The Scrambler" by ABC. This led to the development of the new Ampex BC-210 studio color camera. The on-air success of its portable camera convinced engineers that a studio version could be designed to meet these stringent criteria.

red and 30 blue fields per second—locked to the vertical sync.

Since 60 fields per second are needed to avoid color flicker and meet NTSC specifications, each field is used twice, once as the original signal and once as a delayed signal displaced in vertical position by one line. This is done by field switching processed through a compact new solid-state 252-line delay.

The three signals (red, blue and luminance) are then fed into an electronic matrix in which green is obtained by subtracting appropriate portions of blue and red from the luminance signal. Thus, with only two tubes, and at a significant saving in weight, size and cost, all the necessary information is provided for a broadcast color picture.

Colorimetry

The old CBS field-sequential system worked, but suffered from a noncompatible field rate and color breakup problems. The separate luminance channel in the Ampex system solves these earlier difficulties, and by eliminating the need for green in the filter wheel, makes possible a 60-Hz color field rate. Compared with the red, green, blue field-sequential system, color fringing is considerably reduced.

To televise color satisfactorily, the fast motion of a white object on a black background is probably the hardest problem to handle. In the R-G-B field-sequential system, successive fields have the maximum possible chrominance variation. Further, in a field-sequential system, there is a severe luminance variation from field to field.

In this new system, color fringing is no serious problem.

Optical System

The optical system is designed to obtain high resolution. Pictures of excellent colorimetry are obtained at light levels as low as 100 foot candles. The luminance channel characteristic is similar to that in a four-tube camera except that the sensitivity is improved by reducing the beam splitter's reflectance in the green region. This also permits separation of green in the base station matrix with the required signal-to-noise ratio. The response of the chrominance channel is precisely shaped by the optical red and blue dichroic pass filters in the filter wheel and by the Plumbicon response.

The filter wheel itself revolves at 7.5 rps (450 rpm) driven by a standard high-reliability motor locked to vertical sync by a digital feedback servo which requires no alignment or adjustment.

Angenieux designed a 6:1, 22mm to 132mm *f*2.6 zoom lens for this camera. It is corrected for the total amount of glass in the optical path, and the back focal distance is computed for the configuration used.

In addition to the optical system and lens, the camera head has two Plumbicon deflection yokes,

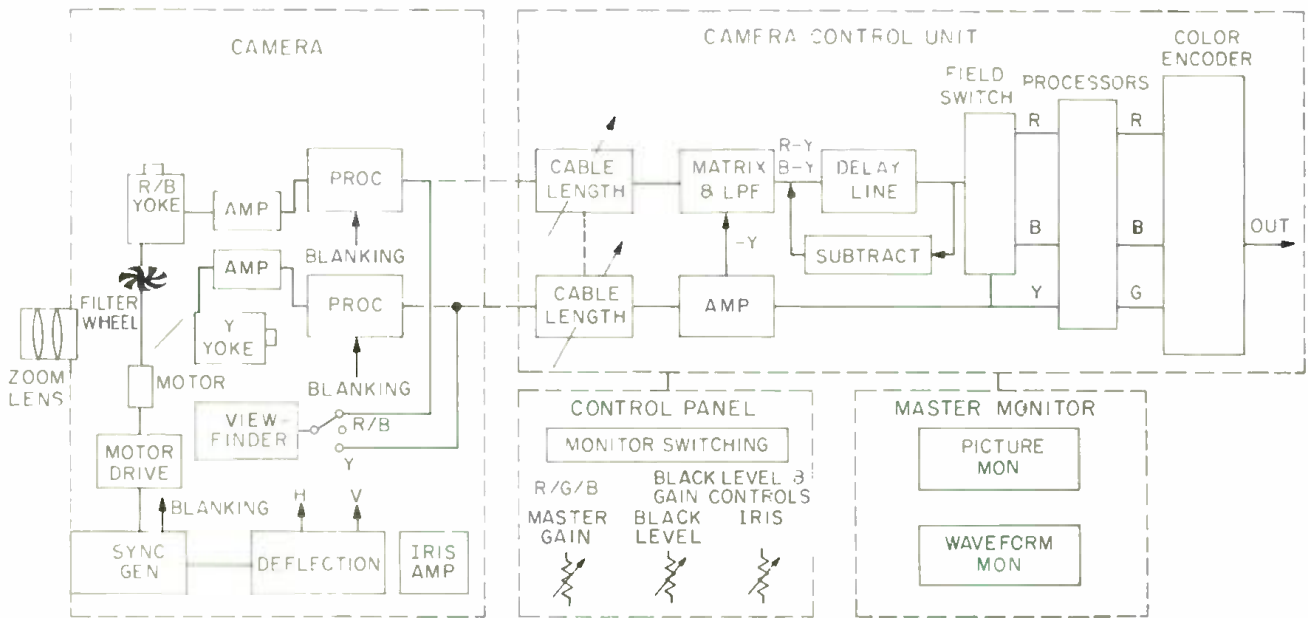


Fig. 1. Simplified block diagram of BC-210 camera head and control systems, showing color matrixing nets.

(Right) Fig. 2. C.I.E. color chart. (Right, below) Fig. 3. Judd's ellipses of noticeable difference with C.I.E. color chart superimposed.

video processor units, micrologic sync generator, trimming controls, de-dc converter, automatic sync lock system, four-position filter turret, pre-amplifiers, power supply, sweep failure protection and electronic viewfinder. The entire camera head including viewfinder weighs less than 50 pounds and measures 8½-inches by 13½-inches by 20½-inches.

The sync generator in the camera is part of a new sync timing correction system which automatically keeps the camera locked to the camera control unit color sync generator. When the cable length is changed, correct sync timing is maintained automatically; more than 3000 feet of cable may be used. In addition to sync, power level is adjusted automatically to compensate for changes in cable length.

Other features of the camera head include talkback facilities between camera and control unit, with two headset positions at the camera; iris fully servoed from the remote panel; camera operating controls conveniently located at the rear of the camera; separate tally lights for operator and talent.

The solid-state removable electronic viewfinder uses a high-resolution, high-brightness 7-inch rectangular CRT. A monitoring switch lets the operator check the luminance signal, chrominance signal and registration by "subtracting" the R and B signals from the luminance signal.

The cable is the smallest ever used on a studio broadcast color camera. It measures 0.485-inches in diameter and 2000 feet of it weighs only 300 pounds. The same length of conventional color



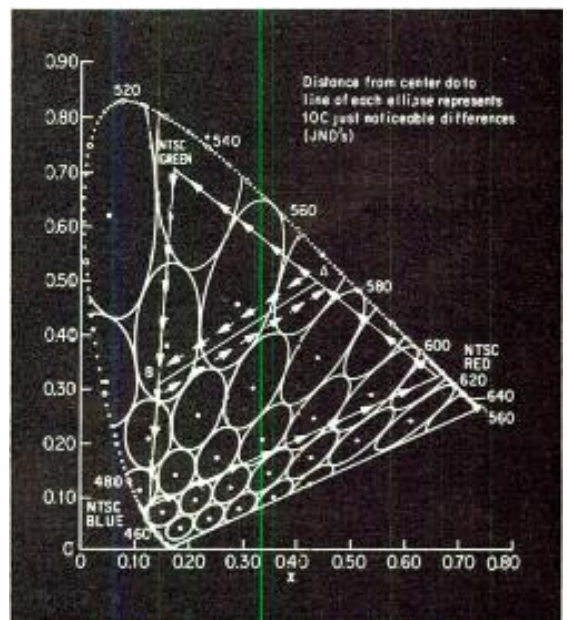


Fig. 4. Relative colorimetry of the BC-210 camera at light levels as low as 100 f.c.

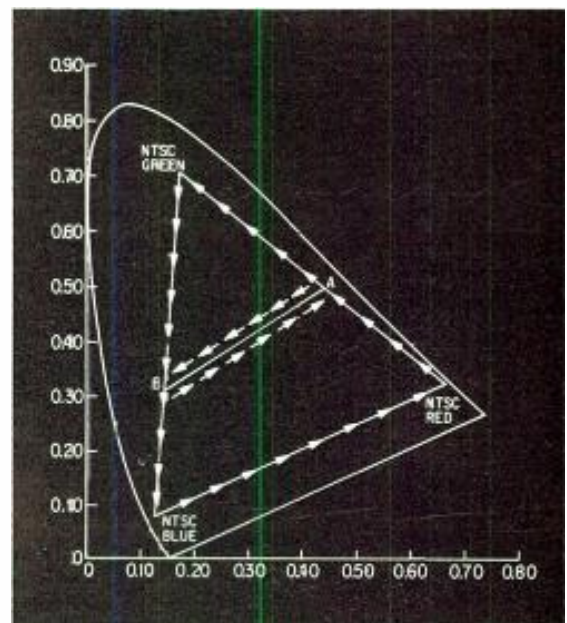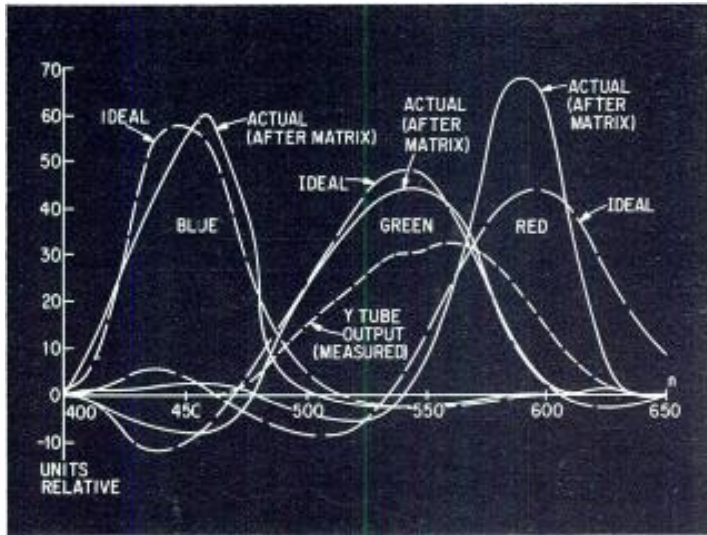

Camera control panel is simple and easy to set up at the cameraman's position.

camera cable weighs 2000 pounds and is four times as bulky.

The reduced size is possible because the cable contains only two coaxial cables, two twisted pairs and 10 other small-gauge wires. Design factors contributing to this small cable size are the elimination of one Plumbicon tube in the camera head, location of the camera controls at the camera head and a sync generator in the camera slaved to the master studio generator, producing automatically timed-corrected drive pulses.

Rack Equipment

The camera control rack contains processing electronics, color sync generator (if required), sync lock comparator, vertical aperture corrector, NTSC encoder and solid-state delay line. It accepts video from the miniature cable and processes it to give conventional, R.G.B outputs. The unit also contains a phone distribution system for communicating within the studio.

The field delay is a wire line with magnetostrictive transducers. The modulation system used through the delay line permits the narrow bandwidth color difference signals to be delayed without loss of picture quality.

The control panel, in 1/2-rack mounting, is connected with the control unit by a 41-conductor cable. It provides conventional R.G.B painting control and difference signal setup controls with complete remote monitoring facilities. The panel also provides remote control of the color encoder,

master pedestal control, remote iris control, remote control test signal switch and cameraman talkback.

Two Tubes on the Air

The two-tube broadcast color camera has already had an excellent baptism of fire. The BC-100 was the first portable color camera used successfully on the air during the 1967 UCLA-USC college football game. It let ABC's camera crew obtain dramatic pictures along the rocky cliffs during the Bing Crosby Golf Tournament at Pebble Beach, California, last January. And if operated successfully in the cold and snow at Grenoble, during the Winter Olympic Games in February. During the political convention coverage in August, it was used for the first time as a microwave unit to televise on-the-floor events without the restraint of a cable.

The BC-210 is a major breakthrough in studio color camera design. It fills broadcast industry's need for a lower cost, compact high quality studio color camera. The combination of big camera quality at a moderate price makes the BC-210 especially welcome in the color camera marketplace. Operational simplicity, plus quick and inexpensive maintenance, add to its attractiveness to broadcasters. Because of its small size and miniature cable, it can add flexibility to multicamera productions and remote pickups. Because of its quality and price, it can be a first camera for broadcasters initially going to color. **BM/E**

BM/E Photo



Dr. Goldmark, developer of the EVR system, demonstrates ease of cartridge loading. Tiny size of individual EVR frames is apparent in closeup (far right).



EVR—Newest Visual Medium

Electronic Video Recording, the CBS entry in the audio/visual area, uses photographically recorded images in a special cartridge that plays back through the antenna terminals of any TV receiver.

ANNOUNCING ITS LATEST STEP in bringing Electronic Video Recording to the industrial, educational and home entertainment market, the EVR division of the CBS hosted a massive press conference at the New York Hilton on Dec. 10.

More than 250 members of the consumer, financial, electronic, educational and broadcast trade press witnessed the first public demonstration of EVR. (A similar display took place the following day in London.) Robert E. Brockway, president, CBS EVR division, presented a panel of five speakers, each of whom explained his part in the goal of selling the EVR player and program cartridges on a worldwide scale.

The first speaker, Dr. Frank Stanton, president of CBS, provided background material on the origin and development of EVR (See p. 8, Oct. /67 *BM/E*) and outlined CBS' hopes for its future. Felix A. Kalinsky, president, CBS Comtec Group, announced that agreements have been made with Motorola Inc. and *The New York Times*. Elmer H. Wavering, president of Motorola, described his Company's plans for production of EVR players. Motorola's production schedule should provide sufficient monochrome players for distribution and marketing in the first half of 1970; color players should be available in the latter half of 1971. Wavering disclosed that his company is tooling up for initial production runs of 25,000 to 100,000 units.

Marketing will be aimed first at educational, hotel/motel and industrial applications. Estimates are that EVR players won't find their way into homes before three to five years have elapsed. Wavering indicated that initial ruggedized industrial-educational models of the players would be priced close to \$800. Later, nonruggedized consumer models should be lower in price especially as production increases, according to Wavering.

Arthur Ochs "Punch" Sulzberger, president and publisher of *The New York Times*, revealed his organization's decision to become the first producer of educational films exclusively for the EVR format. Sulzberger expects cartridge production to hit the 3-million mark by the last quarter of this year. *The Times* has identified 40 or 50 subjects for use in EVR cartridge production. CBS intends to make its film conversion production facilities available to all producers of program material. Although costs of conversion and production are difficult to estimate and vary greatly with the size of a run, the cost of the raw stock is less than one half that of Super 8.

Highlight of the gathering at the Hilton was Dr. Peter Goldmark's demonstration of EVR. Keeping his audience of stitches with quips, Dr. Goldmark inserted a cartridge into one of two EVR players and explained the machine's operation. Track A of the two-track cartridge was played first. Monitors lining both sides of the Sutton Room flouresced after only momentary sync instability with a crystal clear presentation of *Mission Impossible*. Dr. Goldmark demonstrated the machine's stop motion, reverse, fast forward and frame-by-frame capabilities. Switching to track B, Dr. Goldmark held the audience spell-bound with a British educational film he whimsically introduced as concerning the sex life of a grasshopper. The film kept eyeballs glued to the screens.

The EVR cartridge measures 7 in. in diameter by $\frac{3}{4}$ in. wide. It has a maximum capacity of 750 feet of film, 8.75mm (under $\frac{3}{8}$ in.) wide. This is equivalent to 180,000 picture frames or 52 minutes of programming. Cartridges now available play 26 minutes per track; CBS is now experimenting with thinner films to increase playing time. Color playing time will be half that of monochrome cartridges.

THE NEW AMPEX BC-210 is the first two-Plumbicon™ tube color camera that gives you an easy answer to your need for full studio performance plus fast-action field portability—at a price that makes it easy to buy.

The BC-210 color camera can do both studio and remote colorcasting easily. It weighs less than 50 lbs. without lens. The cable, which severely limits other cameras, is less than 1/2 inch in diameter and weighs only 12 1/2 lbs. per 100 feet. A technician can easily

Give your crew a break

STATION MANAGER EXULTS:

The easiest thing about the new BC-210 is owning it. For the price of two big heavy cameras we can get three of these and have some cash left over. We should be able to get more work done in a lot less time and with fewer people, thanks to that new light-weight cable.

SALES MANAGER SAYS:

We can't work any harder, we've got to work smarter. That's why we invested in the BC-210. It puts out color pictures advertisers can admire for themselves. Plus it has easy portability for location work which opens up all kinds of new business.

FLCORMAN SAYS:

I'm sure looking forward to working with that new light cable the BC-210 uses. It's hard to believe that 3000 feet weigh only 375 pounds—compared to 3000 pounds for conventional cable.

And for remotes, the camera lifts right off the tripod with its own handle and sits on a clear, smooth underside. It's plenty rugged because it's all solid state.

shoulder 300 or 400 feet of cable for fast-reaction coverage of local news or sports. And maintenance is easy too—kept easy by the simple design. If you want to lift your station to the top of your market, do it the easy way: the BC-210 color camera.

For complete information, call your Ampex man or write the Video Products Sales Manager at our world headquarters: Ampex Corporation, 401 Broadway, Redwood City, California 94063.

with our new BC-210...the easy color camera

CAMERAMAN SAYS:

Think of it—a color camera with only three little knobs under the big bright viewfinder (which is removable!) At last I'll be able to concentrate on being creative with my camera instead of being its slave.

VIDEO ENGINEER SAYS:


Talk about easy! Set-up time on the new BC-210 should let me get home without a wilted collar once in a while. All major controls are at the CCU. Give it a five minute warm-up, register one channel, and you're ready to go.

CHIEF ENGINEER SAYS:

It will be a great change to see my crew go home once without looking like they've gone five rounds—with less griping about heavy this and complicated that.

AMPEX

TM, NV Philips

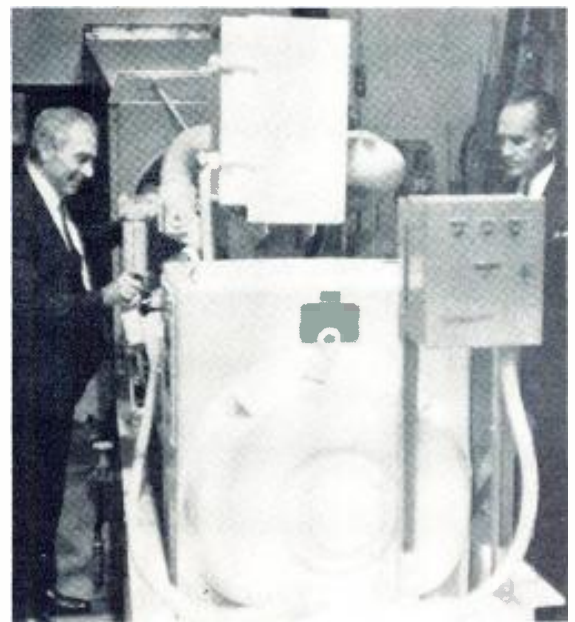

BM E Photo

(Left, above) Technician laying ground radials—150 for each of the three towers. (Left) Extending the radials required use of a Ditch Witch. (Above) Allis-Chalmers 200-kW Diesel power generator gets a test startup. Generator will start and cut over automatically in power failures.

and idle. It is a two-tower $\frac{1}{4}$ -wave with a center wire, fed in phase with about a 70-percent efficiency. That old antenna is now up for hire. The new towers are half-wave structures with an effective height of 692 feet and have an efficiency of about 86 percent. The result has been a net increase in the upper lobe of the figure-8 transmitted field pattern. The lower lobe—toward Philadelphia—is about the same as it was before. "We've also rotated the upper lobe about 15 degrees clockwise," says Garufy, "to get better coverage in New York City, Long Island, Connecticut and Westchester."

Results: "Tremendous response from our listeners," says Sather. "People who've never been able to hear us before or weren't regular listeners because they heard us so poorly, are now getting excellent reception."

Remote Control Operation


The new plant itself is designed for remote-control operation, and once the system has been proven, WOR expects to apply for remote-control approval. In addition to the airtight nature of the building and its super-efficient air pumping and filtration system, the "kitchen" area has been designed as a fallout shelter for transmitter engineer survival. It has an independent air filter and pump which can be run by a motor or

a handcrank. There is a fully stocked larder, and a folding canvas cot leans against one wall in readiness for atomic or other, more mundane emergency uses.


An unusual feature of the antenna towers is their "skirts"—outrigger wires running partway up the structures for detuning other stations. Inside the blockhouse, a Continental phasor keeps the antennas properly matched and phased. Extensive trap circuits reduce interference from other nearby transmitters.

Another special emergency setup is an automatic transfer system which permits either transmitter to operate into just a single antenna tower at 10 kilowatts. The switching permits changeover to any one of the three towers in such emergencies. Radiation in such a case is nondirectional, but the location is so good, that the received signal in New York is actually better in this emergency mode than it was with the 50-kW directional at the old Carteret location. Tower efficiency is so great in fact, that the FCC restricts such operation, and the transmitter power actually has to be cut to below 10-kW when operating this way.

This emergency mode might be necessary if a transmission line were to fail, or if one of the towers were to receive a severe lightning hit knocking out some of the coupling equipment in the

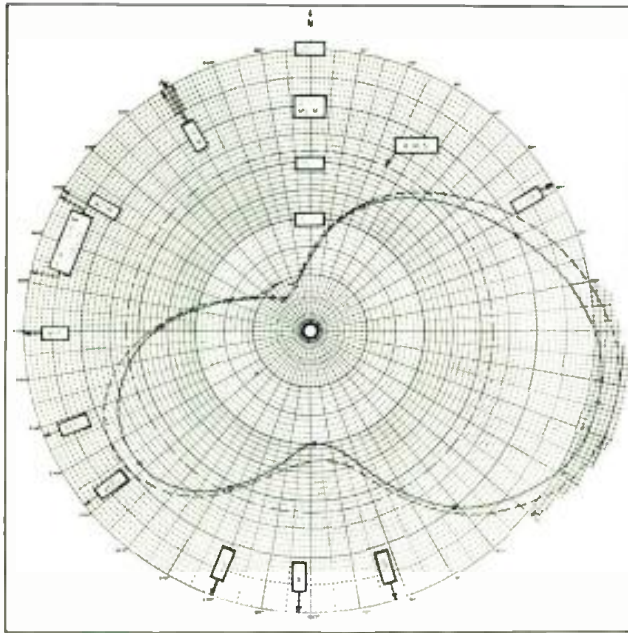

(Above) Horizontal radiation pattern is elongated figure-8 pattern, with bulk of signal concentrated in New York City's densely populated area. (Right) Measured contours from transmitter (at cross) show 100 millivolts of signal in all of Manhattan, and reaching deep into the Bronx, Queens, part of Brooklyn and Staten Island. The 50-millivolt contour covers virtually all of the remaining areas of the city.

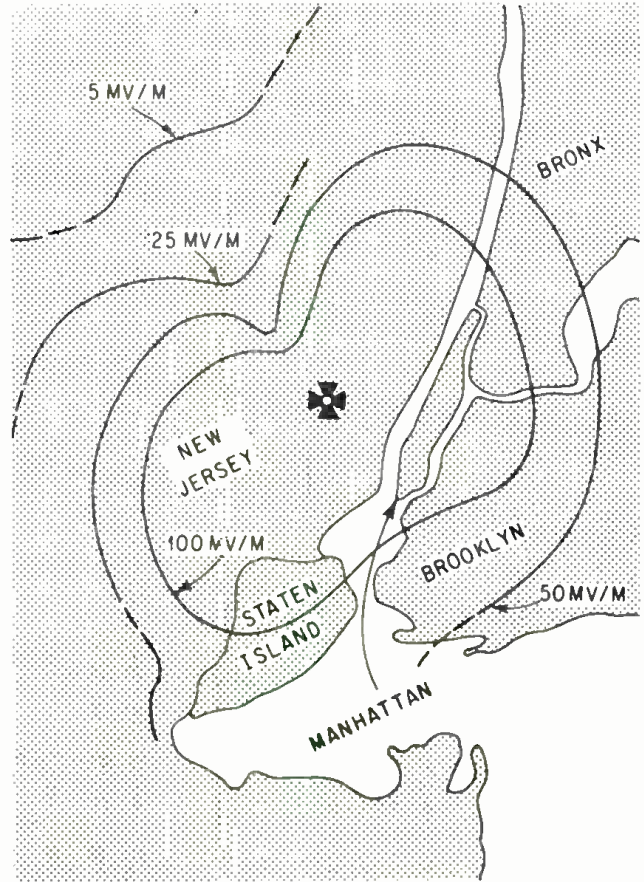


coupling house at the tower base. The towers are well protected against lightning, but there's always the possibility, and the tower engineers have planned well to cover most contingencies.

Reducing the Fire Hazard

The road through Paradise Valley is somewhat changed in character these days. Once inside the WOR property, earth dikes rear up on both sides of the road, as though to save the visitor from the view. Actually, these dikes form a gigantic settling basin for wet landfill provided under contract by builders working on a nearby expansion of the New Jersey Turnpike. The fill's ultimate purpose is to make the garbage fireproof and to provide a more attractive vista around the towers.

Under this new fill is the antenna ground structure—a system of 120 buried cables radiating from each tower base. These cables were buried with a conventional Ditch Witch in the not-so-conventional garbage. Ultimately, the area will be seeded and landscaped to provide a parklike appearance—an oasis in the midst of the swamp and the rumbling garbage trucks. Eventually, it may be the hub of a radio park in the midst of downtown "Meadowland City"—the proposed highly planned new city envisioned for the area. By that time, local real estate values may well belie the humble origins of Paradise Valley. **BM/E**

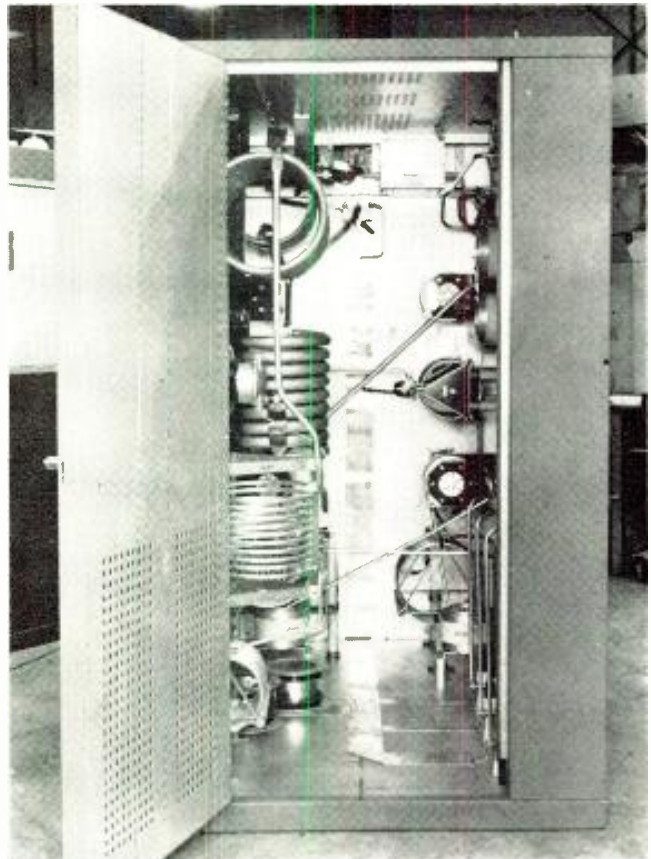

A peek under the hood of the Continental phasor reveals its giant-size tuned circuits. This unit's job is to keep the antennas properly matched and phased for most efficient operation.

You know that supply problem that seems so tough?

We solved it last year.

You think many of your supply problems are unique? Chances are we've met and solved most of them already. Somebody, somewhere at Pruzan—on the phone order desk, in sales or purchasing, or even in the warehouse—has been up against your kind of problem before. And solved it.

Everything we buy, everything we stock in our

60,000 feet of warehouse represents a solution to a problem. Wire, cable, tools, materials of all kinds. It's all at Pruzan.

Call us collect right now. The phone number is (206) 624-6505. When the man answers say "Ala-Pruzan." He'll help you make your supply problems disappear—almost like magic.



"O. K. Ala-Pruzan!"

PRUZAN


Pruzan Company 1963 1st Ave. So., Seattle, Wa. 98134. (206) 624-6505

Circle 21 on Reader Service Card

www.americanradiohistory.com



The New Look in CATV Antennas

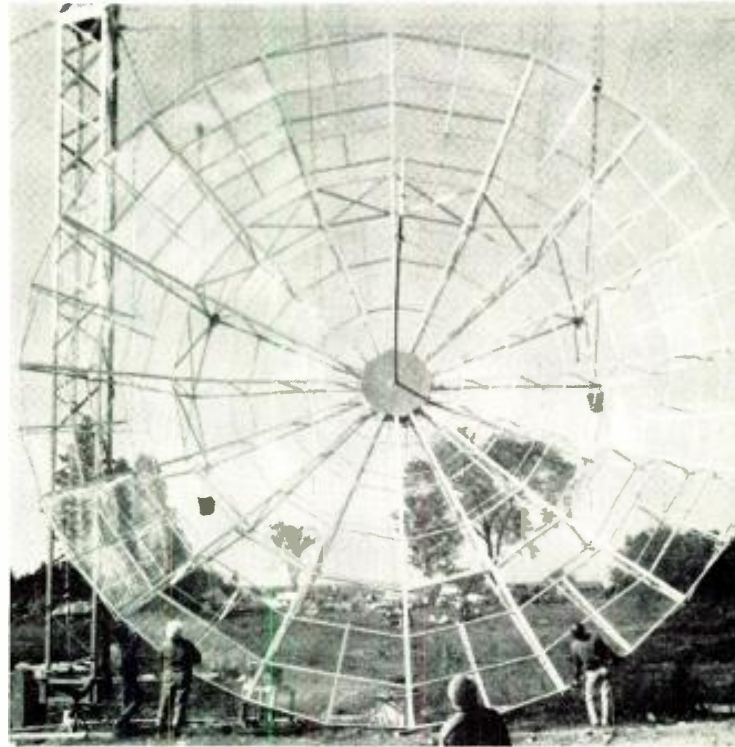

Parabolic reflector type CATV antenna by Hosken is designed for extremely difficult reception areas.

No longer a poor, neglected stepchild, the CATV industry has its own particular breed of head-end antennas designed for picking up everything from fringe-distant stations to feeble radiation from communications satellites.

HEAD-END ANTENNAS CAN POSE a problem—especially for the new and uninitiated cable operator. There's a feast of antenna types available, many of them specifically designed for CATV use.

A head-end installation represents a sizable investment. As such, it's poor economics to skimp on the antenna. These antennas, after all, are your interface with the commercial station signals that you want to pipe to your subscribers. It's your job to provide these channels as crisply and clearly as today's technology will allow.

Height Is Important

Any head-end antenna has to be up high—preferably on a hilltop—to pull in as much over-the-horizon signal as possible. Even if the site itself is high, some kind of tower structure is needed to support the complex and diverse antenna arrays.

Major supporting structures are available from such companies as Fort Worth and Trylon. Fort Worth Tower Co. features towers in a variety of heights and types. Guyed towers are available in heights from 100 feet up, with many special designs available on special order. Booms are

furnished in a special configuration to allow conformity to all varying system specifications. These booms are highly versatile and permit attachments to the main tower at any level and in any position. These CATV booms are made from the same structural steel as the main towers, and are available painted or galvanized.

Low-Cost Tower

Trylon, Inc., offers a line of towers starting with a low-cost 60-foot maximum guyed tower for light-duty and budget installations. This particular mast goes up in a single day. Other heavier towers, such as Trylon's "Heavyweight" series, can be used singly, or in pairs or groupings. These structures can reach heights of 1500 feet and provide maximum reach for CATV head-end antennas. Such heavy-duty towers can hold not only vhf and uhf high-gain receiving antennas, but can also support microwave dishes for imported distant signals.

When paired, these masts can be capped by a bridge between them to support heavy or large-size antenna arrays, microwave dishes or a variety of mixed antennas. Wind-loading capacity of these towers is extremely high, and they stand up well in adverse weather.

High-Gain Antennas

In any head-end application, it's certainly in the cable operator's best interests to use the highest-gain antennas possible for snow-free reception and distribution. Avoidable interference or static has no business going out on the cable.



(Left) Paraflector PR-450 by Scala is available for any frequency from 350-1000 MHz. Model PB-81-BB Parabeam uhf antenna (right) by Jerrold, has broadband feed. RF Systems' zig-zag unit (far right) is characterized by single feed point and can be flush-mounted with the tower.



There are numerous specialized antennas that will fill this need, including variations on the classic Yagi and log-periodic designs, plus a couple of more esoteric configurations.

Setting its sights squarely on the CATV market, Hosken Cable TV Antennas Ltd., a Canadian firm, is marketing a line of antennas that can solve a variety of difficult head-end signal problems. Top of the line is an aluminum parabolic unit with an expanded aluminum mesh screen. This parabolic dish, looking ever so much like a drafty radar bowl, has a 40-ft diameter and is intended for weak signal areas where local interference is a problem. On-site assembly time is two days. Other versions of this dish are available with diversity switching. This antenna has so much gain that it's been successfully used to track satellites. Gain is typically 25.6 dB with 55 percent efficiency at 200 MHz, and front-to-back ratio is 35 to 50 dB.

An even larger Hosken antenna, looking like a gigantic half-circle, is the circular arch tropo parabolic. This giant, economy-size unit is 100 ft wide and 65 ft high. It's so large, it must be ground-mounted, a la conventional tropo, and its height can be increased to 89 ft in extremely poor signal areas. The receiving elements are ranged in the antenna's focal point, at some distance from the main dish, depending on dish curvature.

High-Gain Yagis

Another firm specializing in high-quality, high-gain antennas for CATV is Scala Radio Corp. The catalog includes a line of receiving Yagis that feature single piece full-length elements and a balance feed system for high electrical stability and low noise. These elements are held in place by machined castings for good weather durability. These Yagis are available in five- or 10-element designs with a variety of connectors.

Another Scala special is the "Paraflector"—a junior-size parabolic antenna for uhf reception. Essentially a parabolic section in one plane, the driver is positioned to approach a point source. Measured over the 350- to 1000-MHz range, this

antenna is equal to a parabolic dish of the same aperture and has the advantages of simpler and lighter weight design. Gain on channel 14 is 16 dB higher than for a half-wave dipole. At the higher channels, gain increases to 17.5 dB at channel 83.

Another Scala array, models CL 26 and CL 713, are color log pickups—basically frequency-independent modified logarithmic antennas. The model CL 26 covers low vhf channels, while CL 713 is designed for the high vhf channels. The CL 26 has a gain of 10.5 dB over isotropic source, and the CL 173 has an 11 dB gain. The two arrays give an indicated coverage equal to twelve 5-element single-channel Yagis.

Stacks of Antennas

Old-hand CATV manufacturer Jerrold has a few tricks in its antenna bag, including stacked parabolic dishes called the "Parabeam" series. These antennas are available as single dishes, dual arrays and quad arrays for high gain with minimal wind load. They're optimized for narrow sections of the uhf band, with fourteen basic models for channels 14-18, 19-22, 23-26, 27-30, 31-35, 36-41, 42-46, 47-52, 53-58, 59-63, 64-69, 70-74, 75-78 and 79-83. This type of frequency specialization, while offering high gain at specific frequencies, is bound to load up a tower with many antennas for the various available uhf channels. Still, this method may be preferable for many CATV operators.

Another Jerrold series, the "Color Captain" arrays, are assembled as diamond 4 arrays, single antennas and special designs. These antennas, with their log-periodic response, provide low side-lobes, reduced wide-angle radiation and good front-to-back ratios for high co-channel rejection. Gain is 15 dB minimum above isotropic source for low-band vhf, and 18 dB for high-band. The antennas are one-piece welded, and require no field assembly. Low-band antennas are fold-out units that take about five minutes for one man to assemble. Wind resistance is up to 100 mph with no ice, and up to 70 mph with one inch of radial ice.

BM/E



Picking the Right TV Antenna

By Dr. Jose Perini

Picking the right TV transmitting antenna can be a hairy business, involving detailed engineering studies, computer time and often imprecise results. Frequently, the true efficiency and radiation contours aren't fully established until after the antenna is hoisted and on the air long enough for some field-strength measurements. Using a special computer program, Dr. Perini has developed a set of curves that takes a lot of the guesswork out of TV antenna design.

PLANNING A TV transmitting plant demands a comprehensive study of all the different combinations of existing equipment and possible sites. The target is best possible performance within a specified budget. The actual coverage, that very elusive quantity, has to be maximized.

In some cases, we'd like to know what would happen to existing TV station coverage when

Dr. Perini is Associate Professor of Electrical Engineering, Syracuse University, Syracuse, N.Y. He also is a consultant to General Electric's Visual Communications Products Dept. in Syracuse. This article is adapted from a paper delivered to the IEEE Fall Broadcast Symposium September 19, 1968.



Soaring 1473 feet above the ground on a Dresser-Crane tower, three different antennas for as many Houston, Texas stations take advantage of altitude. At left is helical antenna for KHTV (channel 39); in the center is a zig-zag unit for KHOU-TV (channel 11); at right is batwing belonging to KPRC-TV (channel 2).


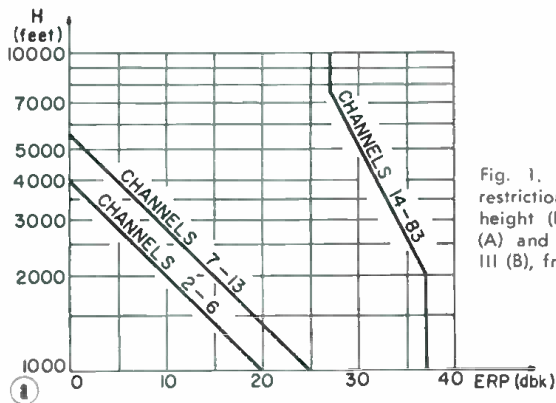


Fig. 1. Maximum erp restrictions vs. antenna height (H) for zone I (A) and zones II and III (B), from FCC Rules.

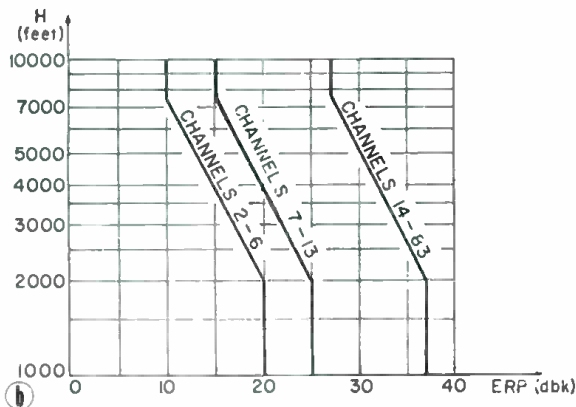

some parameters are changed. These could include antenna height, antenna gain or transmitter power. What is the combination that will buy the most coverage for the least amount of change and/or money?

Transmission Factors

There are five major factors that affect TV transmission:

- Effective radiated power.
- Transmitter power.
- Transmission line efficiency.
- Antenna gain and pattern.
- Site location.

Usually, the maximum radiated power is limited by legal restrictions in the vhf band and by equipment performance in uhf, although legal restrictions may also occur there. The FCC specifies the maximum radiated power according to the graphs in Figure 1.

Transmitter power should be kept to a minimum to keep down operating cost. This will be influenced by the antenna gain and transmission line efficiency, which in turn, are directly related to the antenna tower height. All these parameters are related in this equation:

$$ERP = T_p \times \eta \times G$$

where

ERP — effective radiated power

T_p — transmitter power

η — transmission line efficiency

G — maximum or rms antenna gain depending on whether the antenna horizontal pattern is directional or omnidirectional. Usually this gain is over the dipole.

A superficial look at this equation would make it seem that we could reduce T_p arbitrarily by increasing G proportionally. This method is wrong for two reasons: First, to obtain an arbitrarily large gain, it would require a very large antenna, resulting in excessive antenna and supporting structure costs. Also, if a predetermined *minimum* signal level is to be achieved out to a

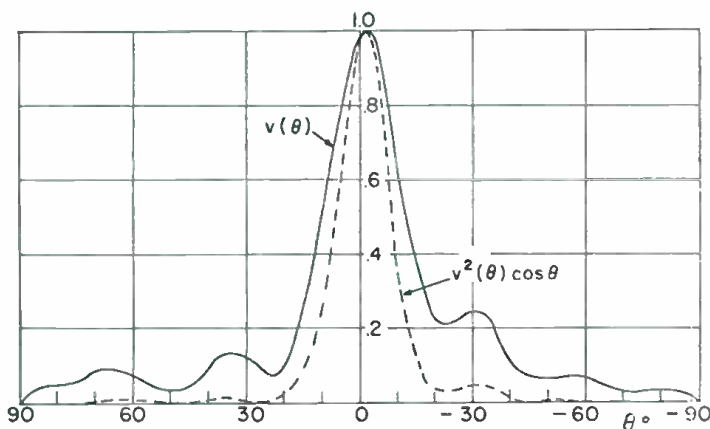


Fig. 2. Vertical pattern plotted for gain computation.

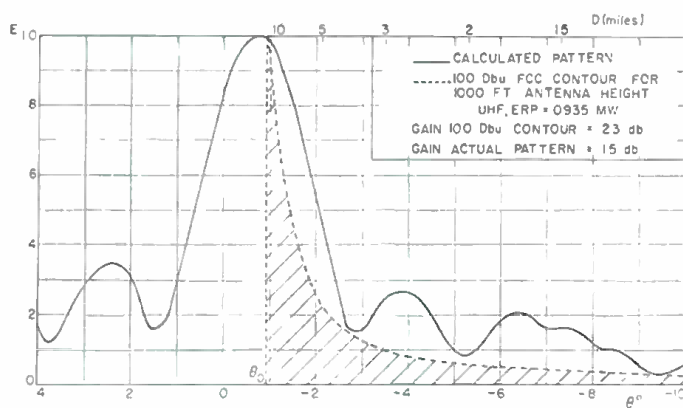


Fig. 3. 100 dBu FCC contour and actual calculated pattern.

specified distance, then the antenna cannot exceed a *maximum gain*.

If we say that an antenna has a gain of 50, it means that we have to feed this antenna fifty times less power than we do an isotropic source (or dipole—whichever is chosen for reference) to achieve the same field in the direction the gain is defined. If we know the radiation pattern of an antenna, we can compute its gain by applying this definition. The equation for this which gives the gain of an omnidirectional antenna, is:

$$G = \frac{2}{1.64 \int_{-\pi/2}^{\pi/2} v^2(\theta) \cos\theta d\theta}$$

In the denominator, $v(\theta)$ is the vertical pattern of the antenna. The equation tells us that we have to compute the area under the square of the vertical pattern multiplied by $\cos \theta$. This is illustrated in Figure 2. The equation also tells us that to obtain a large value of G , the integral in the denominator has to have a small value, which implies that the area under the curve should be small. If we now specify that the field of an antenna can never be below a certain value, say 100 dBu, this is the same as saying that the antenna's vertical pattern should never be below the 100 dBu contour as shown in Figure 3. This in turn implies that the integral in the denominator cannot be made arbitrarily small. In fact its minimum value corresponds to the 100-dBu theoretical pattern.

Site Selection

The selection of a site will affect the antenna pattern requirements. As a general rule, if a large area has to be covered, greater antenna height will be needed. A hilltop site will reduce antenna tower costs as well as transmission line losses.

The site will also determine what kind of horizontal and vertical patterns the antenna must have. Omnidirectional horizontal patterns will be needed when the antenna is in the middle of a populated area; directional when it's between population centers. The vertical pattern can be contoured so the radiated field is never below a predetermined value, close into the antenna tower or out to the maximum distance to be covered. The pattern in Figure 3 represents a field which will never be below 100 dBu from close-in to 13 miles out.

To take maximum advantage of the available radiated power, the antenna's main beam should be tilted so it points below the horizon. The vertical pattern should have as little energy as possible above this angle since this radiation will only reduce the gain. A vertical pattern designed with all these factors is shown in Figure 3. Note that the maximum radiation occurs in the direction of maximum 100 dBu coverage ($\theta_0 \cong 0.8^\circ$ below the horizon) and that the pattern never falls below the 100 dBu contour. The pattern above the horizon is kept to a minimum.

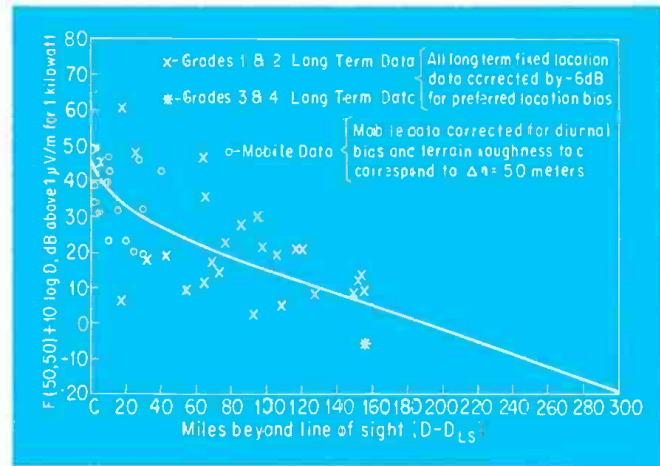


Fig. 4. Proposed new FCC (50, 50) curves for uhf, from FCC report no. R-6602. Note that curve does not fit any of the measured data.

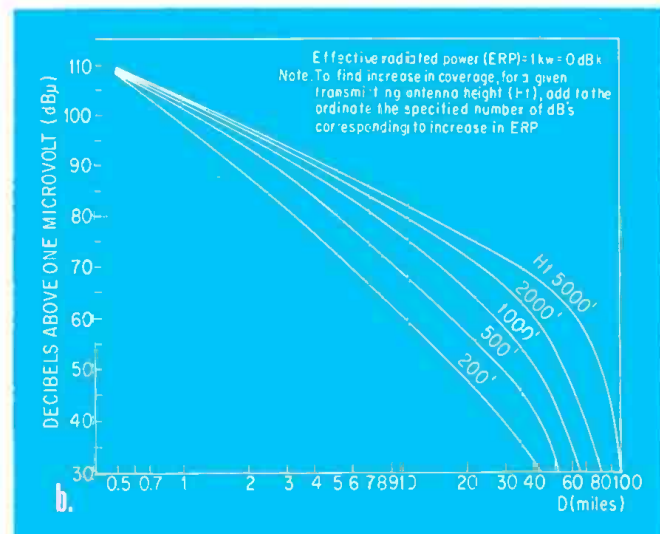
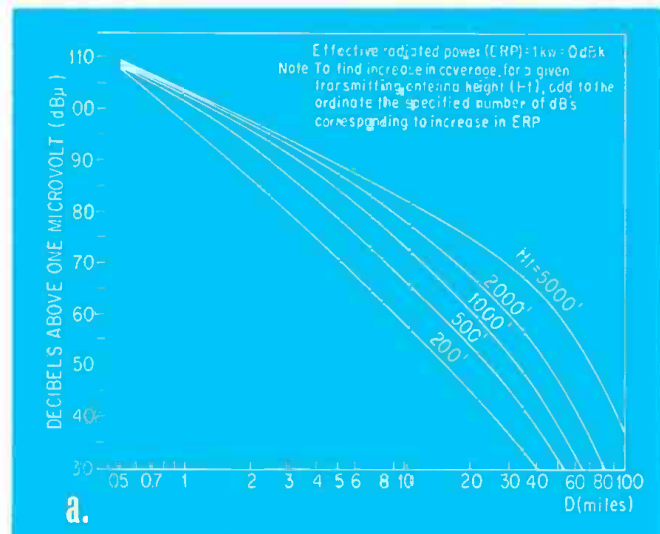


Fig. 5. Coverage data from FCC (50, 50) curves in sixth report for channels 3-6 and 14-83 (A) and channels 7-13 (B).

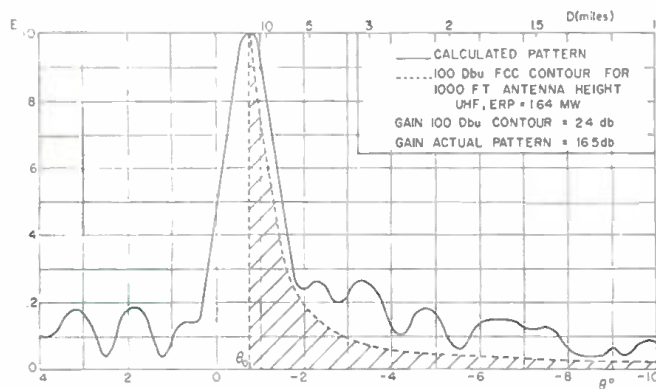


Fig. 6. 100 dBu FCC contour and actual calculated pattern.

Station coverage is an elusive and controversial figure. There's no way it can be estimated reasonably accurately. One reason is because it's not really defined in a convenient way. One may say that the principal city coverage for uhf stations is the contour around the transmitter for which the signal is 80 dBu or higher. But how do you establish where this contour lies? What is the field intensity at a distance from the transmitter when a change of a few feet in the receiving antenna may change the received signal by more than 5 dB? A redefinition of the received signal might make it more compatible with the practical measurements.

It's easy to say, "Well, we just go by the book." We compute the coverage to an accuracy of tenths of miles by using the FCC (50,50) curves. It looks nice on paper, but not in the field when the station doesn't perform as predicted.

In the same way that the average man doesn't exist, the FCC (50,50) curves don't apply to any specific part of the country. This is clearly illustrated in FCC report no. R-6602, in which new FCC (50,50) curves are described. Figure 4 shows how a "smooth curve" was fitted through the maze of points that deviate as much as ± 30 dB from the curve. In any one of these particular location where the data were gathered, the FCC (50,50) predict field would be as much as 30 dB off the measured value. That curve was scientifically fitted to the points by the use of mean square error analysis, but if you pushed it up or down 10 dB, it wouldn't make much difference to the inexperienced eye. If more data were gathered, that alone could shift the curve up or down 5 dB very easily, depending on the part of the country supplying the new data.

This seems to be a hopeless situation, but it's the only tool that we have. Until a better method is developed, we'll have to use this, but should be well aware of its weaknesses. Anyone can compute what the FCC (50,50) coverage is and with a lot of reservations, guess what the actual coverage will be. The curves are also useful in studying the relative influence of the different parameters in a given installation.

Plotting the Curves

The FCC (50,50) curves in use today are

shown in Figure 5. They're a plot of the signal above one microvolt as a function of different antenna heights. The (50,50) means that the signal level is expected to be above the specified value 50 percent of the time in 50 percent of the locations at distance D. Figure 5a applies to the low vhf channels (2 through 6) and to all uhf channels (14 through 83). Figure 5b applies to the high vhf channels (7 through 13).

In Figure 5a, for example, if the ERP is 1 kW, an 80-dBu signal should be expected only out to a distance of 6.7 miles if an antenna height of 1000 ft. above average terrain is used, and out to 9 miles if the antenna height is increased to 2000 ft. If instead of 1 kW ERP we used 100 kW ERP (20 dBk) then we should add 20 dB to the ordinates of Figure 5a. The actual 80 dBu line corresponds now to the 60 dBu line in the graph, and we see that with $H = 1000$ ft. we would have 80 dBu signal cut to 21 miles, while with $H = 2000$ ft. the maximum coverage would be 30 miles.

The constant dBu contours referred to in the previous sections can be obtained from these curves. In Figure 5a, for an ERP of 100 kW (20 dBk) when $H = 1000$ ft. we see that the maximum coverage is 21 miles. From $H = 1000$ ft and $D = 21$ miles, we compute the angle below horizon that the electromagnetic ray will see 21 miles from a height of 1000 ft. This is the beam tilt θ that should be used in the vertical pattern of the antenna. At a distance of 10 miles, the signal will be $73-60 = 13$ dB above 80 dBu. We can therefore reduce the radiated field from the antenna, at that corresponding angle below the horizon, by 13 dB and still have 80 dBu 10 miles away.

If a similar procedure is used for other values of D, then a contour similar to that of Fig. 3 (which is for $H = 1000$ ft, $ERP = 1.64$ mW, $E = 100$ dBu) can be obtained. D can also be translated into the angle θ below the horizontal plane, passing through the antenna, at which an electromagnetic ray sees the distance D. This is done by assuming a spherical earth with a radius $4/3$ of its actual one due to bending of the rays by atmospheric refraction. In Figure 3, both D and θ scales are shown. If we now compute the area under the square of this contour multiplied by $\cos \theta$ we can evaluate the maximum gain possible while still maintaining uniform coverage at a preselected signal level. This antenna would have a theoretical vertical pattern shown by the shaded area of Figure 3.

Deriving Maximum Gain Curves

It turns out that the maximum possible gain is important in selecting a TV transmitting antenna. Computing maximum gain involves figuring the constant dBu contours and integration of the area under the square of the contour multiplied by $\cos \theta$. This calculation has to be done by computer.

If we look at Figure 3, we see that the area

under the 100 dBu contour (shaded area) is much smaller than that under the actual pattern. The gain of the 100-dBu contour is 24 dB, and that of the actual pattern is approximately 16.5 dB. If the side lobes were better controlled, this last gain could probably be as high as 18 dB. Thus a *practical* figure for the maximum gain is about 6 dB less than theoretically computed from the constant-dBu contours. This is the value used in the curves in Figures 6 and 7. In the case of low-gain antennas, probably 8 dB reduction would be more appropriate, since we'd have a smaller number of variables to control the pattern synthesis.

The possible deviations from the constant dBu contour are illustrated in Figure 6, where the theoretical gain is 23 dB and that of the actual pattern is 15 dB. With this in mind we can now look at the computer developed curves. They are illustrated in Figure 7. Figure 7a is a plot of the maximum practical antenna vertical gain to obtain a constant 74 dBu signal, out to a distance D, as a function of the antenna height (H) and effective radiated power (ERP). The curves also show the required beam tilt (θ). To use this curve for a field strength other than 74 dBu, add to the ERP (dBk) scale the number of dBu increase contemplated. For example, if 94 dBu signal level is desired then the actual 20 dBk curve corresponds to the 0 dBk of Figure 7a.

Figures 7b and 7c were derived for 77 and 80 dBu respectively. If a different signal level is desired, then the ERP (dBk) scales should be increased by the number of dB above 77 and 80 dBu in the respective graphs. The reason why 74, 77 and 80 dBu were chosen is because they are the principal city signal strengths specified by the FCC for low vhf, high vhf and uhf.

Nearby Field Patterns

In some applications, the field very near the antenna isn't important and the vertical field pattern can be allowed to be smaller than the constant dBu contour used to shape the main beam and first sidelobes. If in Figure 3, there is no populated area within two miles of the transmitter, we could allow the vertical pattern to be below the 100-dBu contour for angles greater than 5.3° . In doing so we're allowing the gain of the antenna to go up, since we're reducing the area under $v(\theta)$. However this reduction is usually not substantial, since the main contribution for the area under $v(\theta)$ comes from the main beam and first sidelobes. In situations like this, the maximum gain of Figure 7 could be violated, but not by very much. These curves are still correct, however, for the values of ERP, H, D and θ since they were derived from the FCC (50,50) curves of Figure 5. The maximum gain G_m should be used here just as a guide. If the actual antenna gain is several dB greater than G_m , there is reason to suspect that too high a gain is being demanded from the antenna. This will probably be confirmed when the synthesis of the antenna pattern is attempted.

BM/E




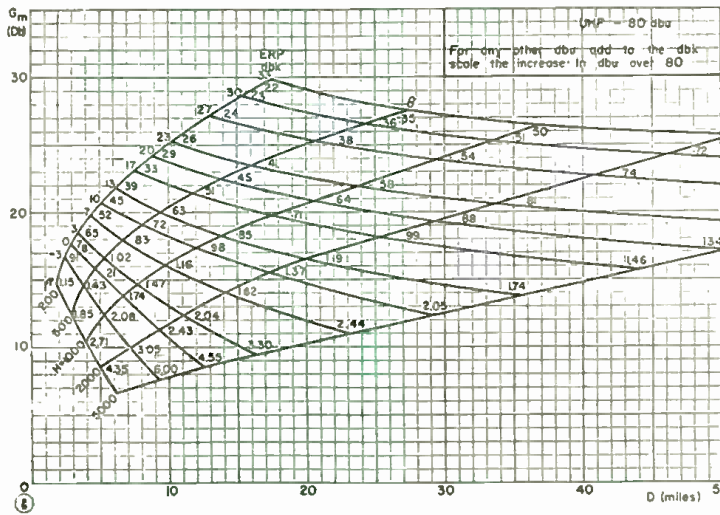


Fig. 7. Maximum gain curves as plotted by computer for (A) channel's 2-6, 74 dBu; (B) channels 7-13, 77 dBu; (C) channels 14-83, 80 dBu.

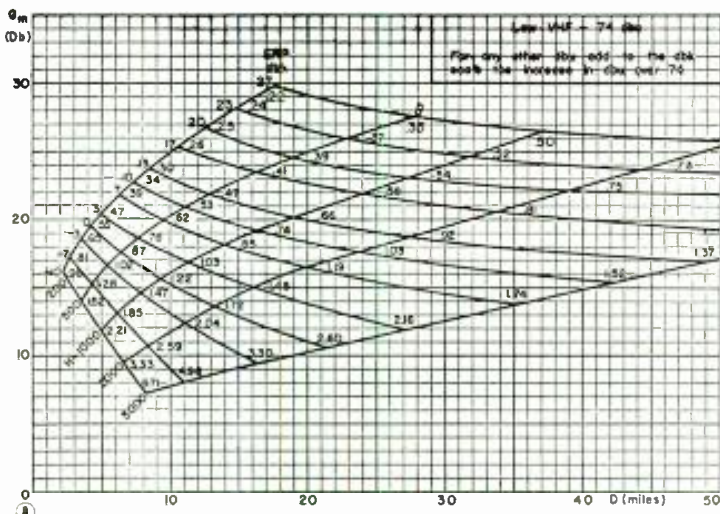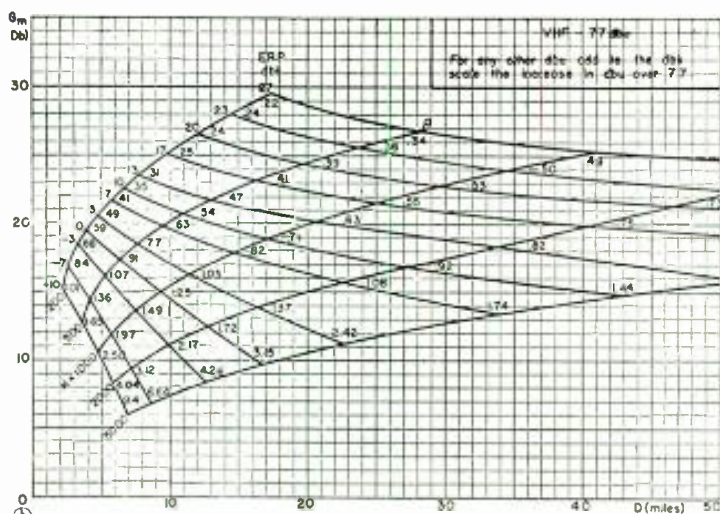

GOOD-BYE KINE HELLO EBR-100

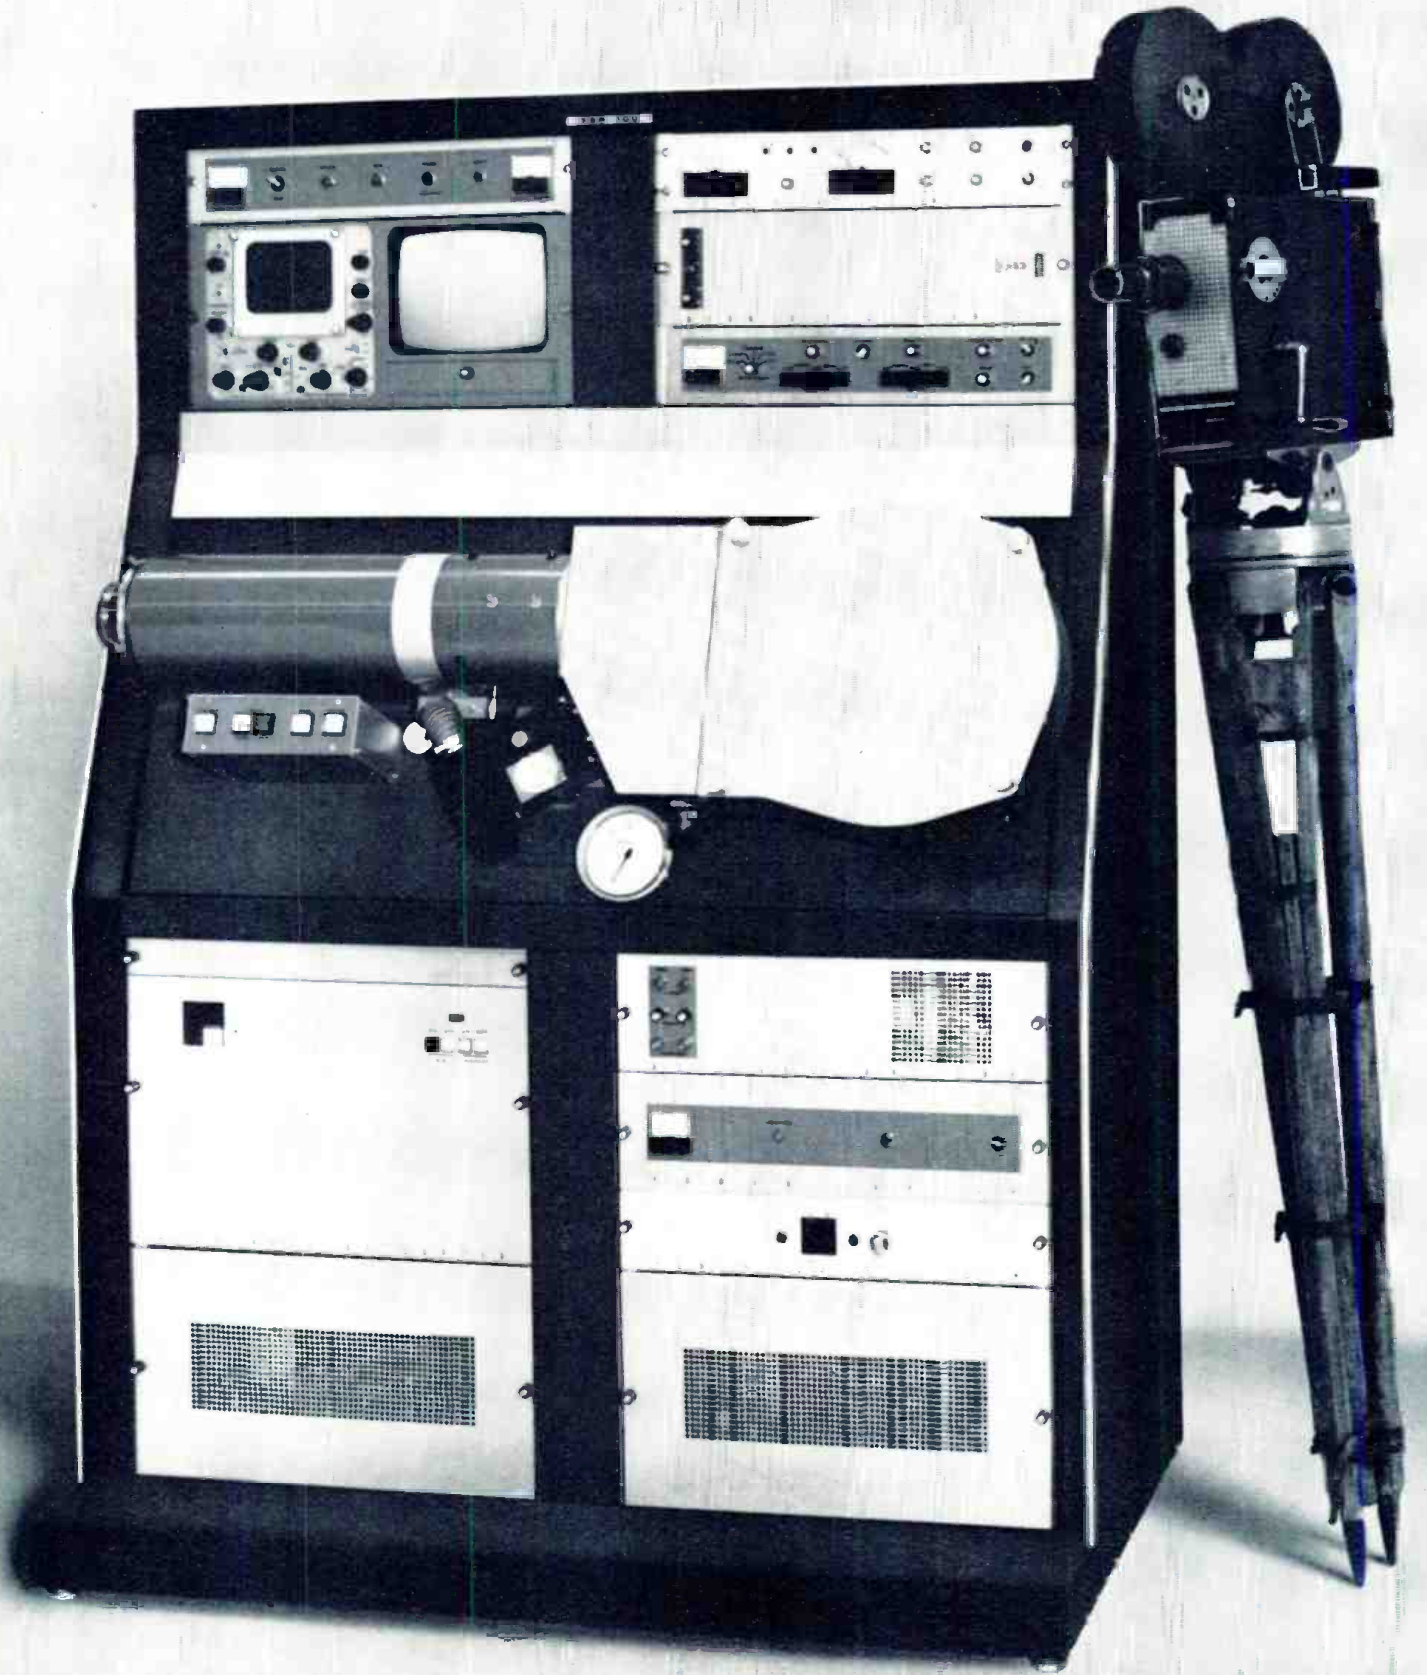

Television raster lines (right) enlarged from 16mm film frames. Lower: EBR-100 recording on 3M fine-grain (less than 0.1 micron) electron recording film. Top: kinescope recording on television recording film. Line-to-line spacing in both pictures is approximately 0.00058 inches or 14.7 microns.

TRANSFER LIVE OR TAPE TV TO 16 MM FILM ELECTRONICALLY AND GET PRINTS WITH 1000-LINE RESOLUTION.

3M's new Electron Beam Recorder is the first system to produce 16mm monochrome film copies comparable to the original live or video tape signal. It has no energy-wasting optical system. It employs direct electron bombardment of the film, eliminating phosphor granularity, face-plate halation and camera-lens losses and distortions.

The 3M Brand EBR-100 far surpasses the conventional kinescope in reproduction quality and in the ability to produce consistently good films. It opens new horizons for TV taping and mass film distribution for educational and training purposes.

The EBR-100 is a machine that every major TV studio, dubbing center, film lab and government communications center will want to employ. Easy to install, completely self-contained.

Direct beam monitoring provides simple,

positive adjustment of exposure and gamma. Secondary electrons imaging the film target verify that focus, size, and linearity are correct. You can choose between a direct positive or a film negative with the flick of a switch. The system also is switchable from US standard 525-line to European 625-line requirements.


The EBR-100 records on low-cost fine grain film. Overall resolution exceeds 1000 lines. The film uses conventional processing and is shown on standard 16mm projectors.

The unit is 68 inches tall, 46 inches wide, 34 inches deep, weighs approximately 1000 lb. and costs about \$55,000. Optical or magnetic sound is available at extra cost.

For details, call our EBR-100 information phone. The number is (805) 482-1911, ext. 216. Or write to EBR-100 Dept. at the address below.

Mincom Division **3M**
COMPANY
300 SOUTH LEWIS ROAD • CAMARILLO, CALIFORNIA 93010
Circle 22 on Reader Service Card

Only 4 tubes in the new Gates solid state BC-5H, 5,000-watt AM transmitter!

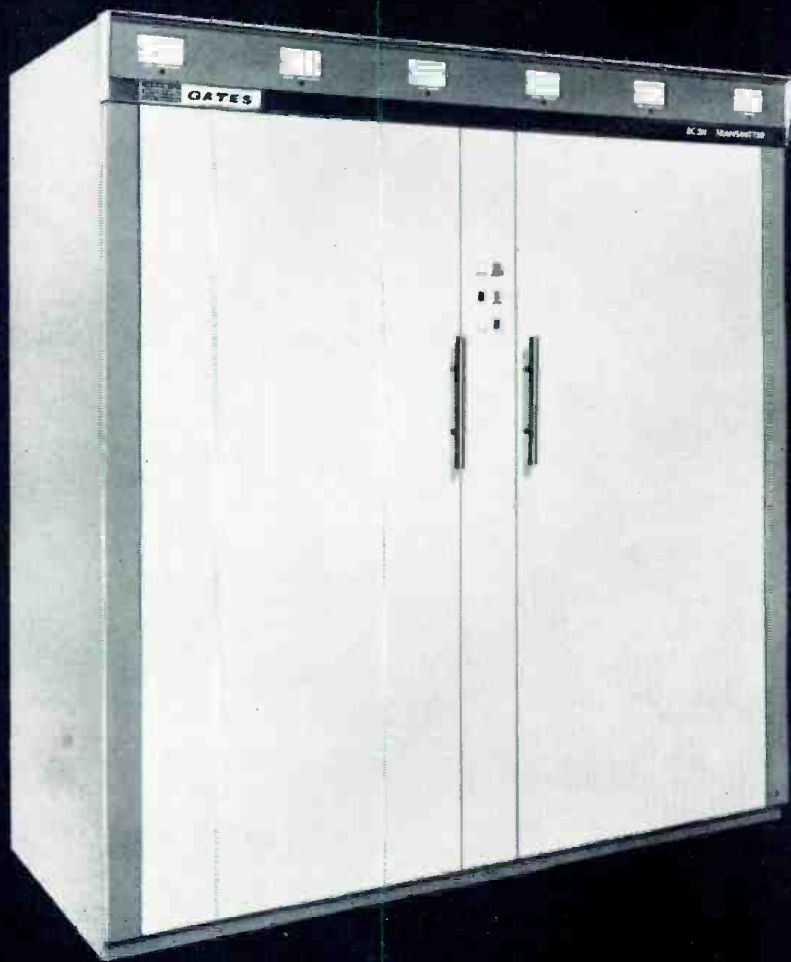

We threw all those tubes out in designing this new transmitter. That leaves just 4. And these tubes cost less to buy and less to operate. Besides that, everything's new in the over-all design: Like the ceramic-type 3CX2500F3 triodes in the power amplifier and modulator. Like the use of transistors in all circuits except the RF driver, power amplifier and modulator. And silicon diodes in all power supplies. And with capability for easy conversion to 10 KW. And two instantaneously switchable transistorized oscillators. And a handsome new cabinet. But enough. Write for the whole story. It's packed with power.

**HARRIS
INTERTYPE
CORPORATION**


GATES

GATES RADIO COMPANY
QUINCY, ILLINOIS 62301, U.S.A.
A subsidiary of Harris-Intertype Corporation

BROADCAST EQUIPMENT

Automatic program controller

Automatic Program Controller selects any of 7 channels, in a sequence of up to 25 events, using a pin-controlled matrix board. A 3-form C

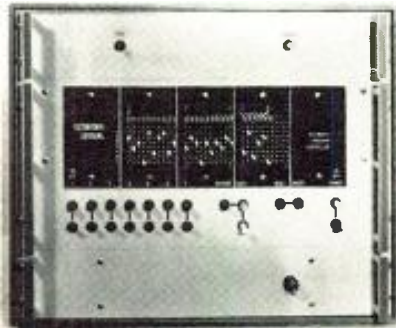

contact closure is provided by the selected channel at each step of the program. Format can be continuous, stepped, or under clock control. Events can be overlapped, if required. Manual control of all circuits is possible. Applications include neon signs, radio/TV programming, CATV and background music. Price is \$1495. Ultimation Systems. Circle 102 on Reader Service Card

International color

First low-cost broadcast and closed circuit color TV cameras designed to operate on both PAL and SECAM systems now are available. Cameras are fifty-Hz versions of the IVC-100 NTSC color cameras. The IVC-101 has three vidicon tubes, integral viewfinder, sync generator and 6:1 zoom lens. The IVC-121 is similar to the IVC-101, and uses broadcast sync generator and encoder for both PAL and SECAM systems and meets broadcast requirements in all countries of the world using PAL and SECAM systems. PAL and SECAM cameras weigh 67 lb. They have a resolution of 400 lines at the center and at the corners. Each of the cameras has a maximum of



28 internal setup adjustments. International Video Corp.

Circle 103 on Reader Service Card

Stereo echo mixer/channel equalizer

EM-7 stereo echo mixer and accessory EQ-7 channel equalizer, when used together, completely process



audio input signals. Echo and low frequency equalization can be introduced to create special effects. Units are suitable for broadcast and recording studio applications. EM-7 mixer handles up to 8 inputs, 4 line and 4 mike, switch selectable from the front panel, feeding them to 4 mixing channels. Any mixing or echo mixing channel can be switch assigned to either output channel or both output channels simultaneously. EM-7 mixers are stackable to permit increasing the number of

T-structure tower; ITFS antenna series



A T-structure tower has been developed that is 220 ft high and is designed to two 12-ft parabolic antennas at the same elevation. Normally this requirement is met by building two towers and putting a bridge between them. The problem of supporting four antennas on one tower was solved

through the use of T-structure. The tower is square and is fabricated from A-31 galvanized steel, with 3-ft cross sections. Cross section on the tower is 20 ft long, 12 ft high and three ft thick. Cross section provides opportunity to stack Ts or bridges at right angles or parallel to each other. Antenna in photo has the capability of accommodating up to 10 antennas at a single elevation. Andrews Tower, Inc.

Circle 100 on Reader Service Card

Series 4760 ITFS antennas for ITFS applications in the 2500-MHz range provide omnidirectional power gains ranging from 7 to 16 dB over an isotropic source. The 2 to 16 (depending on the antenna gain) vertically stacked slotted cylinders are en-


closed in a weatherproof fiberglass radome that may be heated for deicing. Type 4760 can be equipped with side- or top-mounted lightning rods where required. Directional version (Type 4585) is also available. Alford Manufacturing Co.

Circle 101 on Reader Service Card



JAMPRO

RUNS CIRCLES AROUND FM ANTENNAS FOR BETTER RECEPTION

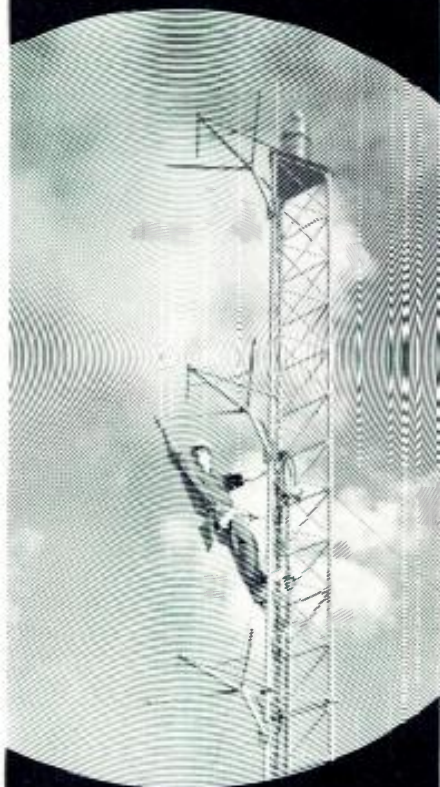

JAMPRO advanced technology has developed another industry "first"! A circularly polarized FM Antenna with variable horizontal to vertical gain ratios! Jampro will adjust the ratio to your exacting specifications for the best possible reception performance available—Reception to the outer fringes, and to more auto FM receivers, too.

EXCLUSIVE DIGITAL TUNING END STUBS allow lower VSWR on your tower (GUARANTEED under 1.1 to 1), and field trimming to 1.08 to 1, \pm 200 KC.

AVAILABLE IN EITHER PARALLEL OR SHUNT FEED SYSTEMS.

Write for full specifications or make a circular motion on your phone dial—Call Jampro today. (916) 383-1177.

JAMPRO

ANTENNA COMPANY
A DIVISION OF COMPUTER EQUIPMENT CORP.
6939 Power Inn Road
Sacramento, California 95828

Circle 24 on Reader Service Card

input channels to 16, 24 or more if required. Output of the EM-7 is rated at 28 dBm and noise on mike channels is below -127 dBm referred to input. EM-7 mixer also contains separate stereo echo mixing circuits including echo send and receive amplifiers. EQ-7 accessory 4-channel equalizer plugs directly into the EM-7 mixer, allowing addition of up to 15 dB of boost or cut at 20 Hz on 4 separate channels independently and simultaneously. Amplifiers are included in the EG-7 to make up for equalization losses. Gately Electronics.

Circle 104 on Reader Service Card

Dropout recorder

3M Dropout Profile Recorder electronically evaluates videotape dropout defects may go unnoticed on the air due to the use of a dropout compensator. Dropout Profile Recorder detects these problems so the tape can be retired before it is reused to record new program material. Dropout profile of an hour-long tape is recorded on a $5 \times 2\frac{1}{2}$ -in. strip chart. Pressure sensitive paper is used. Strip chart is



visible through a plastic window, which can be opened for writing identification data on the chart. Self-contained instrument is designed for mounting in standard RETMA rack. Only connections required are ac power and equalizer output of VTR reproduce electronics. Instrument uses an analog integrator to measure continuously the dropout rate during the previous few seconds of videotape playback. Averaging period used is roughly equivalent to the length of time that dropout annoyance is remembered by a typical viewer. Mincom Division, 3M Co.

Circle 105 on Reader Service Card

Monitor amplifier with 75-W input

Model 1100LU 75-W monitor amplifier is equipped with an output transformer, preamplifier and equalizer. The equalizer provides up to a 6-dB boost at 40 Hz (no steps for attenuation), up to 6-dB attenuation at 4 kHz (no steps for boost) and up to 6-dB boost at 12 kHz (no steps for attenuation). Equalizer has 2-dB/step switches for all three frequencies, and is intended for correction of frequency response of



typical monitoring-type loudspeakers and control room acoustical conditions. Specifications include: 75-W output (+49 dBm), continuous sine-wave; clips at slightly over 100 W in midband range, continuous sine-wave input. Frequency response is ± 1 dB 20 to 20,000 Hz (equalizer controls in flat position). Noise is at least 88 dB below full output, measured over a bandwidth of 20 kHz (with gain fully open, and all equalizer controls in FLAT position). Harmonic generation does not exceed 5 percent at rated output into rated load over the band 30 Hz to 15 kHz. Midrange distortion is less than 0.2 percent. United Recording Electronics Industries.


Circle 106 on Reader Service Card

Portable pager

Unipage is a pocket-size vhf-fm radio paging receiver for operation on any channel within the 150- to 174-MHz band. Receiver uses dual conversion superheterodyne circuit with 26 transistors, including one FET and six diodes. It is designed to operate on a rechargeable nickel cadmium battery. Audio output is rated at 120 mW at less than 5-percent distortion. Selectivity is 50 dB at ± 15 kHz and sensitivity for 20 dB of quieting is better than $0.5 \mu\text{V}$. Spurious response rejection is better than 60 dB and image response rejection is better than 50 dB. Rf bandwidth is ± 10 kHz at 6 dB. Controls include volume con-



Circle 25 on Reader Service Card →

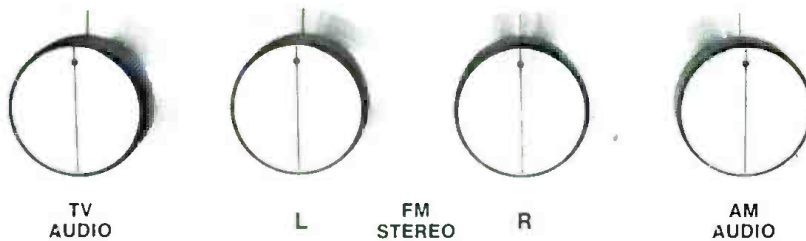

**up to 4 subcarrier channels
— including video —
in STL's or intracity relays**

One subcarrier channel for TV audio, two for FM stereo audio, and one for AM audio or SCA. With Collins microwave systems, that's what you get with color or black-and-white video in studio-transmitter links and intracity relay.

In the 6.8- to 7.1-GHz band, Collins offers this capability in the high performance 1-watt remodulating MW-408D for short systems, and the 5-watt IF heterodyne MW-409E for medium to long systems.


Both systems are completely solid state except for the 408D's transmitter klystron, and the 409E's traveling wavetube. Both meet

COMMUNICATION / COMPUTATION / CONTROL

NTSC color video transmission requirements. Both are available in non-standby or hot-standby space diversity configurations. And the quality of both is the same as Collins' broadcast quality.

Customer services are the same too: field survey, frequency planning, installation or installation assistance, financing, and training.

For details, contact your Collins sales engineer or Microwave Marketing Division, Collins Radio Company, Dallas, Texas 75207.




*Unlocking
the Future*

n
**Electrical
Electronics
Engineering**

**4 FLOORS OF EXHIBITS
NEW YORK COLISEUM**
**48 TECHNICAL SESSIONS
NEW YORK HILTON**

Monday through Thursday



- 48 TECHNICAL SESSIONS at the New York Hilton. Hours: 10:00-12:30; 2:00-4:30.
- FOUR FLOORS OF EXHIBITS at the N. Y. Coliseum including over 600 firms. Hours: 10 a.m.-8 p.m. 4 Days.
- GALA ANNUAL BANQUET—Wednesday 7:15 p.m. N. Y. Hilton Grand Ballroom — \$18.00.
- FREE SHUTTLE BUSES between the Hilton and the Coliseum — every few minutes.

- REGISTRATION — Good all days — Technical Sessions and exhibits. In and out privileges. — IEEE Members \$3.00. Non-members \$6.00. Ladies \$1.00. High School Students \$3.00 if accompanied by an adult — One student per adult: Thursday only — limit of 3 students per adult.
- REG-IDENT CARD speeds request for exhibitors' literature. Ask for one when registering.
- ESCALATORS/EXPRESS ELEVATORS to the Fourth Floor.

IEEE '69  **INTERNATIONAL
CONVENTION & EXHIBITION
MARCH 24-27, 1969**

Circle 27 on Reader Service Card

OF APPROXIMATELY 1800 CATV
SYSTEMS IN THE U.S. . . .

60% have one or more
SITCO ANTENNAS IN USE!

(. . . and more going in every day!)

**HEAVY
DUTY
QUADS-YAGIS**

**LO & HIGH
BAND**

**FM
ANTENNAS**

Write for free SITCO Catalogue

SITCO *Antennas*

10330 N. E. MARX ST. • P. O. BOX 7691
PORTLAND, OREGON 97220 Telephone 255-2341

Circle 28 on Reader Service Card

trol with on-off switch, lamp or tone signal selector switch, reset switch, external speaker jack and battery charger terminals. Unime-trics, Inc.

Circle 108 on Reader Service Card

'Performance' CCTV vidicon cameras

The SC15A and SC16A vidicon cameras have a minimum resolution of 650 lines, and a binary divider chain for positive 2:1 interlace. The SC15A is designed for video/rf application. Rf modulation may be



tuned manually on channels 2 through 6 on a conventional TV receiver. SC15A is equipped with a three-lens manual turret for standard 16mm C mount lenses. The SC16A (shown in photo) has a 9-in. monitor/viewfinder, a 4:1 zoom lens and an intercom system. SC15A is priced at \$1175; SC16A, \$1800. Sylvania Electronics, Inc.

Circle 107 on Reader Service Card

CCTV camera with lots of options

The S/41 CCTV camera is designed for industrial and commercial use. An optional viewfinder attachment can easily be attached or removed. Other accessories include: rf output, dual video outputs, separate external sync input, built-in power supply for an automatic iris lens, locked interlace, special-purpose vidicons as well as a full line of mounting devices, enclosures and lenses. All camera options are designed for simple field installation or as stand-



January, 1969—BM/E

You can earn more money if you get a Government FCC License

...and here's our famous **CIE Warranty** that you will get your License if you study with us at home

NOT SATISFIED with your present income? The most practical thing you can do about it is add to your Electronics know-how, pass the FCC exam and get your Government License.

The demand for licensed men is enormous. Today there are over a million licensed broadcast installations and mobile transmitters on the air, and the number is growing constantly. And according to Federal Law, no one is permitted to operate or service such equipment without a Government FCC License or without being under the direct supervision of a licensed operator.

This has resulted in a gold mine of new business for licensed service technicians. A typical mobile radio service contract pays an average of about \$100 a month. It's possible for one trained technician to maintain eight to ten such mobile systems. Some men cover as many as fifteen systems, each with perhaps a dozen units.

Opportunities in Plants

And there are other exciting opportunities in the aerospace industry, electronics manufacturing, telephone companies, and plants operated by electronic automation. Inside indus-



Matt Stuczynski, Senior Transmitter Operator, Radio Station WBOE: "I give CIE credit for my First Class Commercial FCC License. Even though I had only six weeks of high school algebra, CIE's lessons made Electronics easy. I now have a good job in studio operation, transmitting, proof of performance, equipment servicing...and am on my way up."




Thomas E. Miller, Jr., Engineer, Indiana Bell Telephone Company: "I completed my CIE course and passed my FCC exam while in the Navy. On my discharge, I was swamped with job offers from all over the country. My only problem was to pick the best one, and I did—engineer with Indiana Bell Telephone. CIE made the difference between just a job and a management position."

Cleveland Institute of Electronics

WARRANTY

**OF SUCCESS IN OBTAINING
A GOVERNMENT FCC LICENSE**

A Cleveland Institute of Electronics FCC License course will quickly prepare you for a Government FCC License. If you don't pass the FCC exam after completing your course, CIE will refund all your tuition. You get an FCC License...or your money back!



Matt Stuczynski

trial plants like these, it's the licensed technician who is always considered first for promotion and in-plant training programs. The reason is simple. Passing the Federal Government's FCC exam and getting your License is widely accepted proof that you know the fundamentals of Electronics.

So why doesn't everybody who "tinkers" with electronic components get an FCC License and start cleaning up?

The answer: it's not that simple. The Government's licensing exam is tough. In fact, an average of two out of every three men who take the FCC exam fail.

There is one way, however, of being pretty certain that you will pass the FCC exam. That's to take one of the FCC home study courses offered by the Cleveland Institute of Electronics.

CIE courses are so effective that better than 9 out of every 10 CIE gradu-

ates who take the exam pass it. That's why we can afford to back our courses with the iron-clad Warranty shown above: you get your FCC License or your money back.

Mail Coupon for Two Free Books

Want to know more? Send the coupon below for free copies of our school catalog, "How To Succeed In Electronics," describing opportunities in Electronics, together with our special booklet, "How To Get A Commercial FCC License." If coupon has been removed, just send your name and address to us.

ENROLL UNDER NEW G.I. BILL

All CIE courses are available under the new G.I. Bill. If you served on active duty since January 31, 1955, or are in service now, check box in coupon for G.I. Bill information.

CIE Cleveland Institute of Electronics
1776 East 17th Street, Cleveland, Ohio 44114

Cleveland Institute of Electronics
1776 E. 17th St., Cleveland, Ohio 44114

Please send me without cost or obligation:

1. Your 40-page book "How To Succeed In Electronics" describing the job opportunities in Electronics today and how your courses can prepare me for them.
2. Your book "How To Get A Commercial FCC License."

Name _____ Age _____
(Please Print)

Address _____

City _____

State _____ Zip _____

Check here for G.I. Bill information

Accredited Member National Home Study Council
A Leader in Electronics Training... Since 1934

(BM-17)

Circle 29 on Reader Service Card

AMCI BROADCASTING ANTENNAS

For ITV, UHF-TV
VHF-TV and FM

- Directional and Omnidirectional TV Antennas
- Directional and Omnidirectional ITV Antennas
- Dual Polarized Directional and Omnidirectional FM Antennas
- May be top or side mounted

AMCI Antennas are ruggedly designed and constructed of noncorrosive materials such as 6061-T6 aluminum, copper, and stainless steel. This type of construction, combined with an electrical design that requires few transmission line seals (from 1/8 to 1/4 as many as other comparable antennas), yields an extremely dependable antenna that requires essentially no maintenance.

AMCI also custom designs antenna arrays to meet particular requirements. For a description of one of AMCI's custom designs (An FM Antenna on the Chrysler Building), write for Bulletin 10.




ALFORD

Manufacturing Company

120 Cross Street, Winchester
(Greater Boston), Mass. 01890

Telephone: 617-729-8050 TWX: 710-348-1063

Cable Address: AMCI805

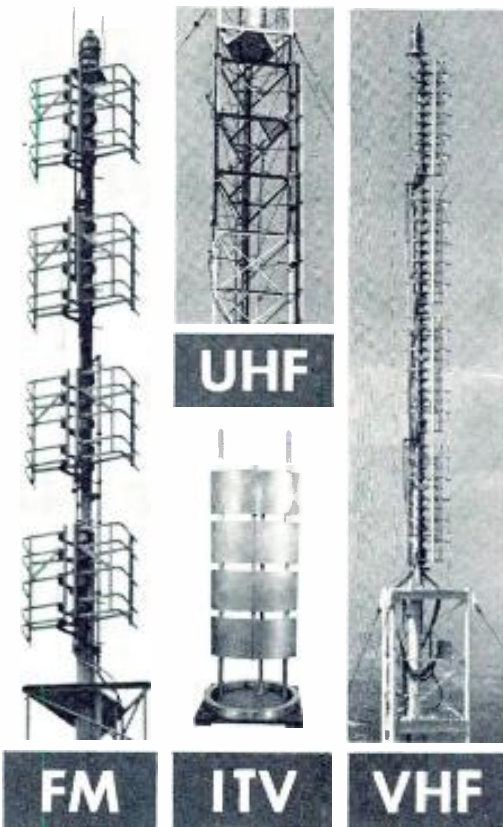

Circle 30 on Reader Service Card

and factory additions. Motorola Communications and Electronics, Inc.
Circle 110 on Reader Service Card

Counter with dc to 125-MHz range

Model 1510A is an electronic counter with a dc to 125-MHz range. Range can be extended to 3 GHz with the addition of a single frequency converter plug-in. Unit totalizes from 10^0 to 10^6 . Frequency ratio is 10^{-16} to 10^{16} . Sensitivity is 100 mV. Crystal aging rate is 3



parts in 10^9 per day; 1 part in 10^9 per day or 5 parts in 10^{10} per day options are available. Internal output is scaled from 0.1 Hz in decade steps. There is provision for an externally supplied time base from 100 Hz to 10 MHz. BCD output is 1-2-4-8 code, negative true. A remotely programmable option is available. Basic price is \$2495. Plug-in modules range in price from \$50 to \$285.00. Monsanto Electronic Instruments.

Circle 109 on Reader Service Card

Fujinon F 1.8/20-100 push rod type



FUJINON the sharpest eye for CCTV or CATV cameras

Fujinon F 1.8/20-100 motor zoom type



Fujinon F 1.8/20-100 standard type

Vidicon cameras go sharp via Fujinon lenses. With focus and zoom extremely smooth and noiseless. Image remaining constantly in focus throughout the

zooming range. And compact and streamlined design to simplify, while enhancing, the operation of every CCTV or CATV camera. To be sure yours are... specify Fujinon.

FUJI PHOTO OPTICAL CO., LTD.

No. 324 1-chome, Uetake-machi, Omiya City, Saitama Pref., Japan CABLE ADDRESS: FUJIKOKI OMIYA

Circle 31 on Reader Service Card


Mobile fm radio with 30-W output

Latest addition to the Mocom 30 two-way radio line is an fm unit operating on 136- to 170-MHz band with an rf output of 30 W. Unit provides dash/trunk mount plug-in interchangeability of a basic drawer-type radio set for convenience in systems with both types of installations. It has a fully transis-



torized receiver and power supply. Receiver selectivity is maintained by a Perkay filter which is sealed in plastic. Reverse polarity protection protects circuitry if unit accidentally connected to the wrong battery polarity. Other features include adjustable squelch, and optional Private Line tone squelch for minimizing reception of messages from other systems on the same channel. Motorola Communications and Electronics, Inc.

Circle 112 on Reader Service Card

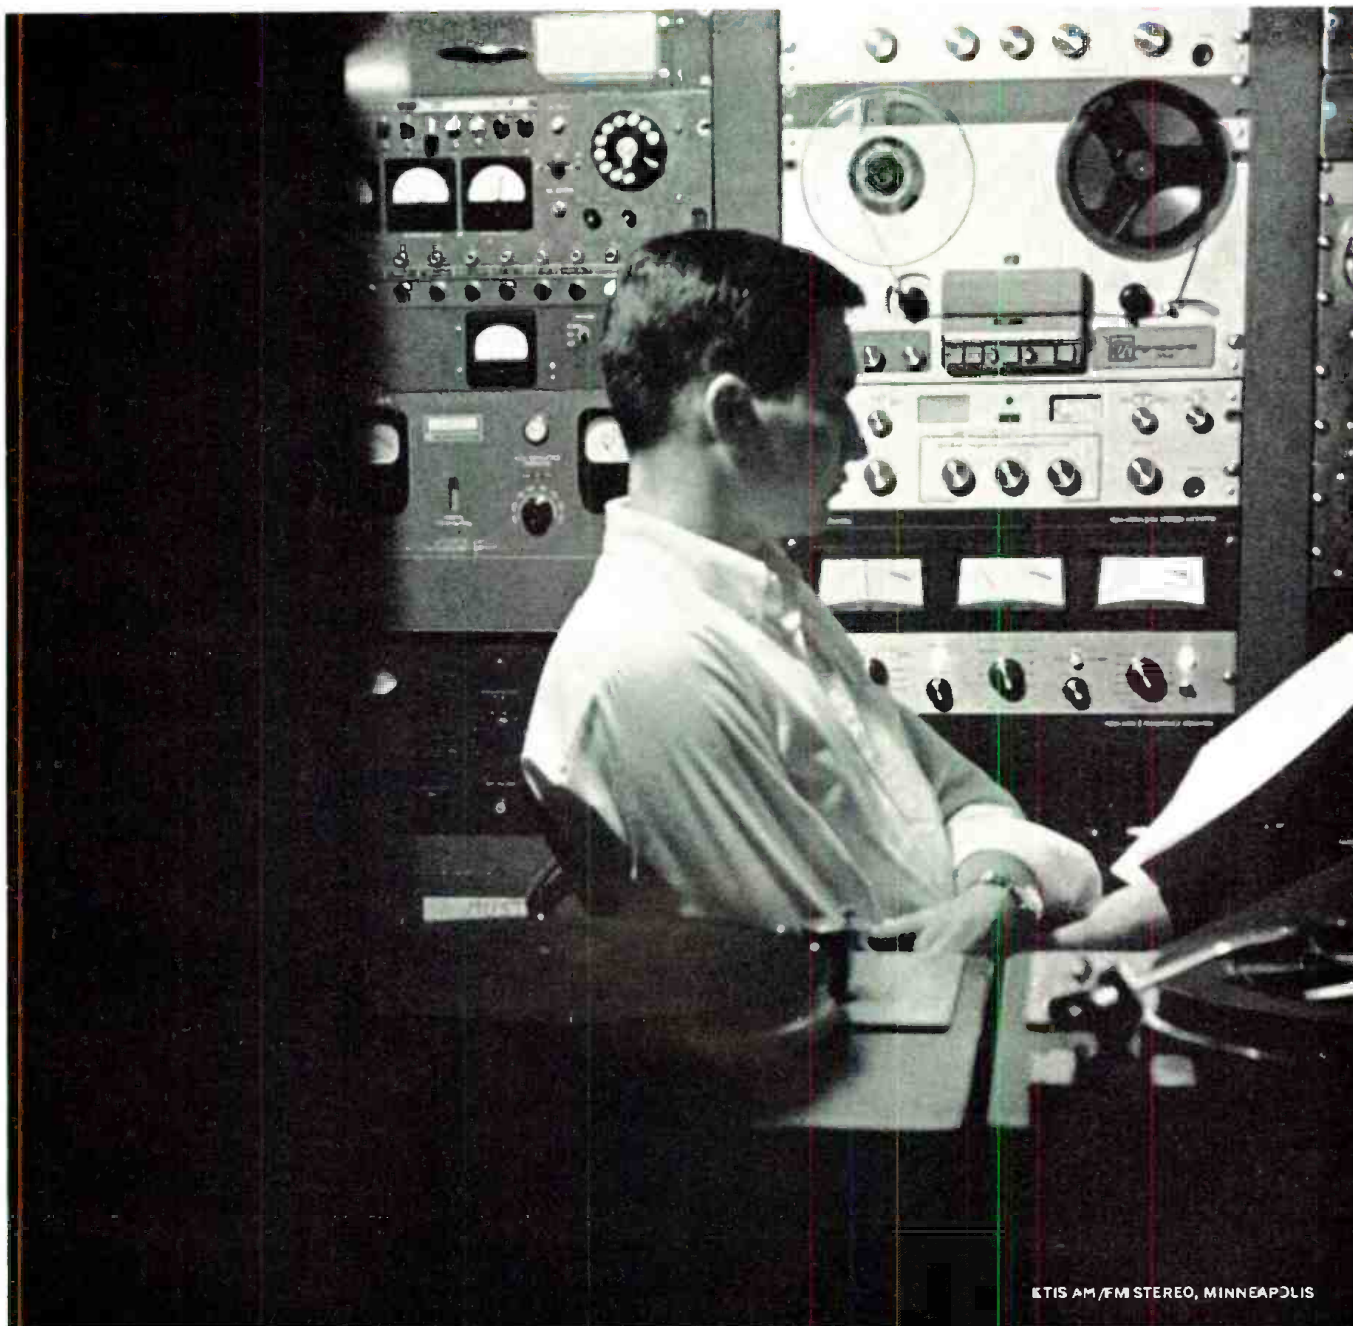

KTIS AM/FM STEREO, MINNEAPOLIS

Every Hour of Every Day

Magnecord tape recorders run hour after hour, every day, under the toughest broadcast conditions. The die-cast mainplate assures permanent mechanical alignment. Timing accuracy is constant with the hysteresis synchronous capstan tape drive. Payout and take up reels have their own heavy duty split-capacitor motors. In short, solid state Magnecords are built to take it, day after day. You can depend on it.

The quality of a Magnecord does not vary from model to model. Features do:

MODEL 1021. Monaural broadcast unit. Inputs: Mixing bridge and choice of Lo-Z microphone or balanced bridge or unbalanced bridge. Cue Speaker. Monitor Amplifier. Two speeds. Balanced 150/600 ohm output.

MODEL 1022. Studio or broadcast stereo unit. Inputs Per Channel: Auxiliary bridge and choice of Lo-Z microphone or balanced bridge or unbalanced bridge. Separate Playback and Record/Gain Controls for each channel. Master Playback and Record/Gain Controls. Balanced 150/600 ohm output. Choice of speeds and head configurations. Full remote option.

MODEL 1024. Commercial or personal stereo unit. Inputs Per Channel: Hi-Z microphone, mixing bridge, auxiliary bridge. Full mixing facilities. 1K ohm emitter follower output. Choice of speeds and head configurations.

Write for the full story on a Magnecord tape recorder. You can depend on a prompt answer.

PRODUCTS OF SOUND RESEARCH

TELEX®

COMMUNICATIONS DIVISION
9600 Aldrich Avenue South
Minneapolis, Minnesota 55420

Circle 32 on Reader Service Card

Multronics new MULTIFILAR R. F. Inductors can carry more current in a smaller unit.

1. Fixed Bifilars (dual windings) 40 amps available in ranges from 6 through 155 UH
2. Variable Bifilar (dual windings) 30 amps 8, 11 and 25 UH units available
3. Fixed Trifilars (triple windings) 60 amps available in ranges from 5 through 65 UH
4. Fixed Quadrifilars (four windings) 80 amps available in ranges from 6 through 34 UH

These 1/2" x .090" Edgewound Ribbon inductors (with two or more windings intermeshed in parallel) have the same quality features that have gained acceptance in the standard line of tubing and edgewound ribbon inductors designed and manufactured by Multronics, Inc.

- Silver-Plated Copper Windings with anti-tarnish finish and hard-soldered terminations,
- Non-Breakable Support Bars of G9 MELAMINE that combine minimum loss resistance (dissipation) with superior arc resistant qualities,
- TEFLON Insulation to prevent closed loops and
- Numbered Support Bar for easy identification during tune up.

It has long been known that edgewound ribbon inductors provide greater inductance and high Q in a smaller length of winding, but not until the introduction of Multifilars has the industry made full use of the increased surface area of edgewound ribbons. The result is compactness with high inductance and greater amperage capacity.

Let's compare the equivalent tubing sizes required to give the same surface area as the new Multifilars:

- Bifilar = .702" O.D. Tubing
- Trifilar = 1.05" O.D. Tubing
- Quadrifilar = 1.4" O.D. Tubing

Many turns of tubing (a long coil) would be required to give the same inductance as obtained with the equivalent Multifilar.

Multronics, Inc. has an unequalled off-the-shelf capability... as well as the design capability to come up with something special for your unusual requirements. It will help, when you contact us, if you will spell out just what your inductor needs are, so that we can make a specific response to your inquiry.

George P. Howard
Director Communication Products Division

MULTRONICS, INC.

5712 Frederick Avenue
Rockville, Maryland 20852
Telephone (301), 427-4666

Circle 33 on Reader Service Card

CROSS- TALK

Dear *BM/E*:

I read your *BM/E* magazine with great interest every month, especially the engineering articles, but I do have one severe criticism, what one might be called "printer's dropout."

In your October 1968 issue, in the article on "Network Loops," a section seems to be missing between pages 33 and 34.

Would you consider publishing the missing extracts not only for my benefit, but for all the many other readers who must be just as puzzled as I am!

T. G. Black
Chief Engineer
Gibraltar Broadcasting Corp.

The printer's dropout between pages 33 and 34 actually consisted of just one line. The first sentence on page 34 should read: "Station technicians frequently get around these problems by periodically sampling the low-frequency level."

Dear *BM/E*:

I was most shocked to find my answer to your ITV query printed in the November 1968 issue of *Broadcast Management/Engineering* magazine. When I say "shocked," I mean practically bowled over for I find my words listed under a heading called "Minimal Maximization at Several Schools." If there is anyone in Southwestern Indiana, Southeastern Illinois, and Northwestern Kentucky more enthusiastic about instructional television, I have yet to meet him. I am afraid that whoever edited the comments on query goofed rather badly. What I said referred to other projects using enrichment programming once or twice a week to their classes.

Our organization has, for the past ten years (now in its eleventh) produced over 1100 programs a year, 5 days a week, 36 weeks per year, to the classroom, offering one-half of a daily lesson. That is about as ITV as you can get. The fact that we were on radio, doing television (which is hard to do) and are back this year, certainly offers proof that our programming is successful and our teachers are happy about it. The inference from this article is that ours is not successful and not going forward; an inference, I may suggest, most untrue. Our contact with our teachers is a daily contact. We have a field consultant visiting every classroom in our area throughout the year. Also, we have several workshops during

the year bringing teachers together to discuss and formulate curriculum.

I am most sorry that this misinterpretation came about, for our people are most happy with the programming offered, and we are looking forward sometime early in 1969 to activating our own channel and increasing our program offering 100 percent.

I hope there is now a clear understanding that I am a believer in instructional television and Southwestern Indiana Educational Television practices it, we hope, to its extreme.

Quoting the last line from your publication, "Edelman appears to believe there is too little contact with teachers in the classroom." This statement, I believe, is true with regard to other projects I have observed throughout the country and not in our own area of Indiana, Illinois and Kentucky.

Robert S. Edelman
Director, SWIETVC

Dear *BM/E*:

I have noted your interest in constructive critique, knowing how valuable this can be I would like to feel free to offer some ideas.

Primarily, I would like to see more feature stories on the operational end of radio and television stations. That is to say, more emphasis on type of sales, promotion, programming and basically, indepth studies concerning the alleviation of problems in the above areas.

While I enjoy reading *BM/E* I feel there is more need for emphasis on areas of broadcasting that relate more directly to the managerial end of the operation. Let me say, too, that we are a unique station in so far as we are a new fm'er battling a long established a-m/fm branch studio in town, and I might add, we are winning the battle! Would be happy to supply you with facts if you are interested in how we are building our business.

Randy Jeffery
WFDT Radio
Columbia City, Indiana

Dear *BM/E*:

Your special section in the November *BME*, "Tool or Toy?—ETV/ITV" was interesting to me as it was not too long ago that I was working in this field. However, the question you posed regarding the "tool" or "toy" label which should be given to the medium was not answered.

I hope, because your special issue did not mention any of the wastes that are associated with this medium (especially at the primary and secondary schools levels) that readers will not assume it is only a tool. The sad fact is that millions of dollars of

FAIRCHILD



The Desktop Console above is comprised of
**FAIRCHILD INTEGRATED
CONTROL MODULES**


Each module is one compact control unit offering full capability of processing the microphone signal to the line level or mixing buss. It provides -18 dbm output to a recorder or other equipment.

The Module includes these functions: Input Level Selector Switches and Pads, Input Preampifier, Input Fader with or without cue, Echo Feed Control, Echo Feed Selector, Compressor, Full Spectrum Program Equalizer, Output Amplifier, Metering, Channel Selector Switch.

Each Fairchild Desktop Console is assembled to meet individual requirements; the one above accepts up to ten modules. Other Fairchild modules include the Integrated Control Output Module, which processes the signal from the mixing buss to the console output, and the Monitor Module, which provides complete flexibility in the selection of recording channels.

Contact your Fairchild Recording Distributor or write Fairchild for more data.

**FAIRCHILD RECORDING EQUIPMENT
CORPORATION**, Dept. BME-1, 10-40 45th Avenue,
Long Island City, New York 11101

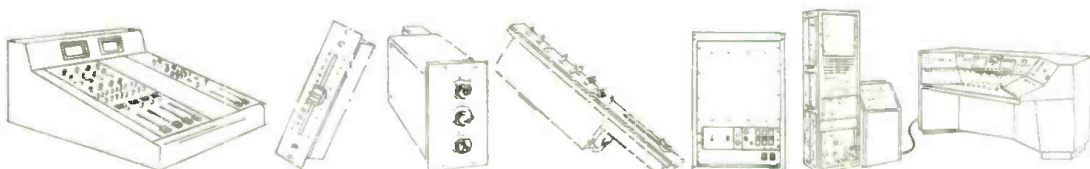

DESKTOP MODULE CONSOLE / LUMITEN / FEVERBEET & N 658B / INTEGRATED CONTROL MODULE / REVERBERTRON 658A / REMOTE AUDIO CONSOLE



Perfect your CCTV system with **COSMICAR** lenses

Shown are a few selected at random from COSMICAR lenses ranging from 8.5mm to 1,000mm and zooms.

COSMICAR is also prepared to custom-make lenses of any specifications.

Please write today to:



COSMICAR OPTICAL CO., LTD.

(Former name: ICHIZUKA OPTICAL CO., LTD.)

568, Shimoochai, 2-chome, Shinjuku-ku, Tokyo Cable Address: "MOVIEKINO TOKYO"

Circle 35 on Reader Service Card

taxpayers' money is being wasted in this area and, if this continues, it will give EV/ITV a bad name.

There are many serious and fixed limits of ETV/ITV, and unless educations are made to realize this, they will continue to squander money in areas where ETV/ITV does *not* belong. It is also about time that educators stop attempting to convince teachers that ETV/ITV will not replace some of them. Used as a real "tool," television can reduce the number of teachers required in our colleges and secondary schools by almost 1/3. This would have the effect of eliminating the many "marginal" educators that are presently being employed because of teacher shortages. The number of marginal and incompetent teachers is what is holding back public acceptance of higher salaries for educators and the reduction of their numbers by ETV/ITV would be a blessing.

Robert L. Rooney
General Manager/
Chief Engineer
wosc, Oswego, N.Y.

Dear *BM/E*:

Many thanks for your mention of our project with ETV, Computer and Telephone, in the November issue of *BM/E*. I hope that your readers are challenged by the possibilities that our use of technology poses for the future of education. It is most important to us that the concepts of our work be exposed to the criticism and evaluation of the academic as well as the business community. With such exposure, we will be able to come to a better understanding of how our work can be best employed in the area of effective education. Again, many thanks for your inclusion of our work in your magazine.

Brother Austin David, FSC
Director of Education
Data Systems
Archdiocese of New York

Dear *BM/E*:

I am trying to find out whether the Otto K. Olsen Company of Hollywood, California, is still in business and if so, what their address is. This company manufactures studio lighting equipment. We'd like to contact them for replacement parts.

Many thanks for your help. We're still enjoying your magazine.

Fred Wright
Director
KGGM-TV
Albuquerque, N.M.

We've searched all standard electronic and broadcasting directories as well as our memories but we're unable to come up with anything. Can anybody help?

BROADCAST PHONO Preamplifiers

STEREO & MONAURAL MODELS

MONAURAL MODEL 1 M \$52

Compares with the BEST

STEREO MODEL 1 S \$104

Call or write for folder

- Built-in audio
- Level control
- Fully transistorized

RUSSCO POWER SUPPLY UNITS supplies power for up to 4 more units model 1-P \$42

SOLD DIRECT OR TO DEALERS

RUSSCO Electronics Mfg.
6879 N. SUNNYSIDE, CLOVIS, CALIF.
PH. 299-4692

Circle 36 on Reader Service Card

SPOT CHECK

A RED INDICATOR APPEARS ON THE FACE OF YOUR TAPE HEAD WHEN THERE ARE ABOUT 100 HOURS OF WEAR LEFT

FREE BROCHURE → ASK FOR SPOT CHECK BROCHURE

MICHIGAN MAGNETICS
A DIVISION OF VSI CORPORATION
VERMONTVILLE, MICHIGAN 49096
Telephone (517) 259-8911

Circle 37 on Reader Service Card



**TV, ETV, CATV
Transmission Equipment**

WANTED:

Rugged, reliable type to help with top-quality color and black & white TV transmission. Should have solid background. Must be able to operate at peak efficiency in sub-freezing and desert conditions. Should make few demands and must hate repairsmen. Price must be reasonable.

Information on an accident in El Camino Ave. Please call
C.—Young lady eat 16F, please Stanford, Calif.
er, pls. contact once. Urgent.
e call Janice,
Diana Simiona- Hwy. 40. EVR.
Rankin call 986- Glenn.
Personals
—Nurse. Still of a brogue. e blarney. Just ble man.

LANE

982-5380
835-4174
y 1-5
753
ys

**DRAFTSMEN
ELIMINATE FREEWAYS**
from your before and after work hours. Eliminate the high cost of commuting from your budget. Exceptional opportunity for 2 experienced detailing draftsmen, 2 to 3 years mechanical experience to accept permanent positions in a young growing manufacturing firm, headquartered in Belmont. Call for VACU-BLAST, 593-7658.

ENGINERS, DESIGNERS
Tech. Serv. 744
5563.

137-Help
DRAFTSMAN
Parr Blvd. R.
DRAFTSMAN,
WESTERN GE
ELECTRICIANS
Federal Elec. Pa.
ELECTRONIC Bench
experienced. To
sumer electronic pro
2nd class license nee
plan, vacation, perm.
Electronics. 935-7253.
ELECTRONIC Techs. M
Electronics. Palo Alto.
ELECTRONIC technicia
F B M experience. Ca
background desirable.
ate placement. Call
6620 or send resume
Corp. P.O. box 2096,
Cal.
ELECTRONIC Technicia
lenced in C.C.T.V. co
tions, sound and p
tems required. Write
Box 128 Stateline
ELECTRONIC TE
MACH
Send
Kirk Engine
1038 W
ELECTR
design
1185
ELECT
G
1601 C
ELECT
ters.
ENGIN
ing
Dr

So far, there's only one applicant

It's Lenkurt's 76 TV microwave transmission system. This is the system that's bringing top-quality color and black & white TV into areas where they used to think something was wrong with their picture if it didn't have snow most of the time. For instance, take the 76 TV Studio Transmitter installation at station KOLO-TV in Reno, Nevada. Since the 76 is transistorized, the new system operates with practically no maintenance, quite a bonus to KOLO-TV because one of their microwave terminals is located on Freel Peak, where 20 foot snows and 100-200 mile winds are not uncommon. Another outstanding feature of the 76 system is its versatility. At the University of Kansas Medical Center, a 76 ETV system makes it possible for students to participate in classes being presented at a sister campus, 45 miles away. This is one of the few two-way ETV systems in existence. This system is significant because of the high resolution it provides for remote observation of medical techniques.

And the Columbia Basin Microwave Company is using our microwave to transmit two off-the-air pickups through an extensive 76 network to serve several CATV companies and school districts. So, whether you're planning a community TV setup, an Educational TV program, or want to join a network, and you want rugged, reliable equipment to help with top-quality color and black & white TV transmission, you'd be doing a smart thing to write us for the resume on our money-saving, solid-state 76 TV microwave system. Lenkurt Electric Co., Inc., San Carlos, Calif. Other offices in Atlanta, Chicago, Dallas, and New York City.

LENKURT ELECTRIC
SUBSIDIARY OF
GENERAL TELEPHONE & ELECTRONICS GTE

NAMES

IN THE NEWS



Dr. W. E. Glenn Paul Spengler

Dr. William E. Glenn, general manager of Applied Research for CBS Laboratories, has received a national citation for his pioneering efforts in development of an electron tube which makes possible quality color TV pictures as large as 6 × 8 feet.

Paul Spengler has been named assistant chief engineer at WRAL-TV, Baltimore, according to Otto R. Claus, chief engineer.

The board of directors of Anaconda Electronics has elected **Duane Crist** vice president.

The Society of Motion Picture and Television Engineers recently made three awards: Eastman Kodak Gold Medal Award to **Dr. Edgar Dale** for his contributions to promoting use of audio-visual equipment in education; Herbert T. Kalmus Gold Medal Award to **Walter A. Fallon** for his work on color film for motion pictures; and the E.I. du Pont Gold Medal Award to **Immanuel Samoylovitch Marshak**, of the USSR for his pioneering work on the electronic flash tube.

At the Audio Engineering Society's 20th anniversary conference in October, **Benjamin B. Bauer** was elected president of the Society.

Leonard E. Kronfeld has been named president and chairman of the board of Minnetech Laboratories.

NET Board Chairman **Everett N. Case** has announced the election of **John Hope Franklin**, chairman of the department of history at the University of Chicago, to the board of directors of National Educational Television.

The latest addition to WTOP (southern Florida) Radio's news staff is **Robert H. Thompson**.

The FCC has made known the appointment of **Raymond E. Spence, Jr.** as deputy chief engineer and **Robert L. Cutts** as assistant to the chief engineer for Plans and Spectrum Development.

Election of **Edward Schwartz** as vice president for operations of Multronics, Inc., has been announced by **John H. Mullaney**, president and chairman of the board.



David Bain Hank E. Lockard

The Fairchild Recording Equipment Corp. has announced the appointment of **David Bain** as manager of application engineering, a newly created post.

Hank E. Lockard has been promoted to manager of Perfect TV, Inc., Harrisburg, largest of Jerrold Electronics' operating cable television systems.

It's a 33¹/₃ hour day for QRK!



CUSTOM 12" also available in STANDARD 12" or 16"

33-1/3, 45, 78 or even 24 hours a day . . . the sun never sets on QRK Professional Turntables. Throughout the world thousands of them are working right now.

WHY? Because QRK's exclusive originality, precision manufacture and quality control have earned its place in the sun in all hemispheres. Since introducing the QRK principle 23 years ago, we've discovered there's something extra special about originality — besides being first with an idea . . . Like a Michelangelo, it's always an original . . . You can't hang a QRK, but positioned on your console you can depend on its performance from now on, and like a Michelangelo . . . perhaps just a little dusting now and then. No matter what time you have, somewhere the sun is shining on a QRK.

Check one out or write your dealer or us for more information.



ELECTRONIC PRODUCTS

2125 N. BARTON, FRESNO, CALIFORNIA 93703

QRK's new direct line - (209) 251-0001



Circle 39 on Reader Service Card

BUSINESS REPLY MAIL

NO POSTAGE STAMP NECESSARY IF MAILED IN THE UNITED STATES

POSTAGE WILL BE PAID BY



BROADCAST MANAGEMENT/ENGINEERING

Mactier Publishing Corporation
Subscription Department
820 Second Avenue
New York, N.Y. 10017

FIRST CLASS

PERMIT NO. 25039
New York, N.Y.



BUSINESS REPLY MAIL

NO POSTAGE STAMP NECESSARY IF MAILED IN THE UNITED STATES

POSTAGE WILL BE PAID BY



BROADCAST MANAGEMENT/ENGINEERING

Mactier Publishing Corporation
Subscription Department
820 Second Avenue
New York, N.Y. 10017

FIRST CLASS

PERMIT NO. 25039
New York, N.Y.



BUSINESS REPLY MAIL

NO POSTAGE STAMP NECESSARY IF MAILED IN THE UNITED STATES

POSTAGE WILL BE PAID BY



BROADCAST MANAGEMENT/ENGINEERING

Mactier Publishing Corporation
Subscription Department
820 Second Avenue
New York, N.Y. 10017

FIRST CLASS

PERMIT NO. 25039
New York, N.Y.



READER SERVICE CARD

BM/E - Broadcast Management/Engineering

Good until 3-31-69

GET MORE INFORMATION on products, free of charge. Just circle appropriate number below and mail card today.

Tell us what you like or dislike in this issue.

Pages = _____

Comments: _____

1	16	31	46	61	76	91	106	121	136	151	166	181	196	211	226	241	256	271	286	301	316
2	17	32	47	62	77	92	107	122	137	152	167	182	197	212	227	242	257	272	287	302	317
3	18	33	48	63	78	93	108	123	138	153	168	183	198	213	228	243	258	273	288	303	318
4	19	34	49	64	79	94	109	124	139	154	169	184	199	214	229	244	259	274	289	304	319
5	20	35	50	65	80	95	110	125	140	155	170	185	200	215	230	245	260	275	290	305	320
6	21	36	51	66	81	96	111	126	141	156	171	186	201	216	231	246	261	276	291	306	321
7	22	37	52	67	82	97	112	127	142	157	172	187	202	217	232	247	262	277	292	307	322
8	23	38	53	68	83	98	113	128	143	158	173	188	203	218	233	248	263	278	293	308	323
9	24	39	54	69	84	99	114	129	144	159	174	189	204	219	234	249	264	279	294	309	324
10	25	40	55	70	85	100	115	130	145	160	175	190	205	220	235	250	265	280	295	310	325
11	26	41	56	71	86	101	116	131	146	161	176	191	206	221	236	251	266	281	296	311	326
12	27	42	57	72	87	102	117	132	147	162	177	192	207	222	237	252	267	282	297	312	327
13	28	43	58	73	88	103	118	133	148	163	178	193	208	223	238	253	268	283	298	313	328
14	29	44	59	74	89	104	119	134	149	164	179	194	209	224	239	254	269	284	299	314	329
15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	285	300	315	330

YOUR NAME AND ADDRESS:

Name: _____

Title _____

Station or Company _____

Street _____

City _____ State _____ Zip _____

The information requested is for Immediate Use Future Use

COMPLIMENTARY SUBSCRIPTION QUALIFICATION CARD

1. I would like to receive BM/E — Broadcast Management/Engineering Yes No

2. I specify purchase Capital Equipment
 approve the purchase of: Replacement Parts
 Services
 None of the above

AM FM TV Station(s)
 CCTV (Educational-Theatrical Industrial)
 CATV Facility
 Telephone Company
 Government
 Other _____ (Specify)

3. My company is _____

4. I am responsible for Multiple Facility
 Single Facility

5. Your signature _____ Title _____ Date _____

6. The address below is correct

7. For Address Change — Give OLD Address below

NAME _____	TITLE _____	Is this your business address? <input type="checkbox"/> Yes <input type="checkbox"/> No
STATION or CO. _____	_____	If not your business address please
STREET _____	_____	give us your business address below
CITY, STATE, ZIP _____	_____	so that we can avoid sending duplicate copies
Firm Name _____	Business Address _____	City _____ State _____ Zip _____

READER SERVICE CARD

BM/E - Broadcast Management/Engineering

Good until 3-31-69

GET MORE INFORMATION on products, free of charge. Just circle appropriate number below and mail card today.

Tell us what you like or dislike in this issue.

Pages = _____

Comments: _____

1	16	31	46	61	76	91	106	121	136	151	166	181	196	211	226	241	256	271	286	301	316
2	17	32	47	62	77	92	107	122	137	152	167	182	197	212	227	242	257	272	287	302	317
3	18	33	48	63	78	93	108	123	138	153	168	183	198	213	228	243	258	273	288	303	318
4	19	34	49	64	79	94	109	124	139	154	169	184	199	214	229	244	259	274	289	304	319
5	20	35	50	65	80	95	110	125	140	155	170	185	200	215	230	245	260	275	290	305	320
6	21	36	51	66	81	96	111	126	141	156	171	186	201	216	231	246	261	276	291	306	321
7	22	37	52	67	82	97	112	127	142	157	172	187	202	217	232	247	262	277	292	307	322
8	23	38	53	68	83	98	113	128	143	158	173	188	203	218	233	248	263	278	293	308	323
9	24	39	54	69	84	99	114	129	144	159	174	189	204	219	234	249	264	279	294	309	324
10	25	40	55	70	85	100	115	130	145	160	175	190	205	220	235	250	265	280	295	310	325
11	26	41	56	71	86	101	116	131	146	161	176	191	206	221	236	251	266	281	296	311	326
12	27	42	57	72	87	102	117	132	147	162	177	192	207	222	237	252	267	282	297	312	327
13	28	43	58	73	88	103	118	133	148	163	178	193	208	223	238	253	268	283	298	313	328
14	29	44	59	74	89	104	119	134	149	164	179	194	209	224	239	254	269	284	299	314	329
15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	285	300	315	330

YOUR NAME AND ADDRESS:

Name: _____

Title _____

Station or Company _____

Street _____

City _____ State _____ Zip _____

The information requested is for Immediate Use Future Use

Q & A

Continued from page 14

that you are performing a public service; that public service is that you are giving the merchant the names of the people who do not read or keep his circulars. *Don't be sarcastic but impress the merchant that you care enough about his business to save him mailing costs.* Then you can proceed by suggesting he use the money he saves by diverting it into a radio schedule.

This slow-but-sure process works very well, especially when you have success stories to show him from the other stations. Once you have an opportunity to advertise for a merchant, you must produce for him. Your every effort from this point on is to make his radio advertising pay off. Then you've got a foundation to build on. Getting the account is one thing, but keeping it is another! Success begets success and once you get started, it'll be a daily challenge to keep the ball rolling.

Now, in the matter of the weekly newspaper, you use this procedure: every newspaper ad has wasted space. Examine the ads

closely. Re-arrange them to occupy less space. Determine how much the merchant could save by this new layout of his ad. Show this to the merchant. He'll appreciate the fact that you took enough time and trouble to show him how to save money on his newspaper ad. Now show him how to get more mileage out of his advertising by spending that money you saved him on your station. He'll be getting *both* media for the money that he used in newspapers alone. *Never*, I repeat, *never* knock the competition. Encourage advertisers to use your station because *of its value to them and not because your competition is bad for them!* Don't be greedy, shoot for a **SHARE** of the existing budget and that share will increase as you produce for the advertiser.

Q. I know I can make a sale if I can come up with the right answer to satisfy the sponsor. He is a local representative for a hearing aid company. This man sets up shop in each one of the five towns in my coverage area one day a week. He listened attentively to my presentation about the quality of my station. He agreed with the rates and

offered no objections at all. This made me uneasy because I like to have at least *one* objection that I can overcome when I make a sale. He was saving that for the very last! He shot it out like a cannonball: "How can my customers respond to the ads when they're hard of hearing? That threw me for a loop and I got all tangled up when I tried to give him a reasonable answer. Please tell me what the answer to *that one* is.

Bill Vaughn, Charlotte, N.C.

A. In the first place, advertising certain products could be illegal in some states. For example, optometrists can use radio in some states and not in others. This matter is mostly one of state law, so check on this point first.

His message is intended for the *friends and relatives* of the people who are hard-of-hearing. The *last* person to *realize* that he has poor hearing is the person who is gradually losing his hearing. If I were you, I'd write a commercial something like this:

Someone you know will not

Continued on page 74

PHOTO: MONTE CASSAZA



Mark Waters was a chain smoker.

Wonder who'll get his office?


Mark kept hearing the same thing everyone does about lung cancer but kept on smoking cigarettes. Probably thought: "been smoking all my life...won't help to stop."

No matter how long you've smoked, the risk of lung cancer decreases when you stop, provided cancer or emphysema have not developed.

Next time you reach for a cigarette, think of your office—and your home.

American Cancer Society 

THIS SPACE CONTRIBUTED BY THE PUBLISHER

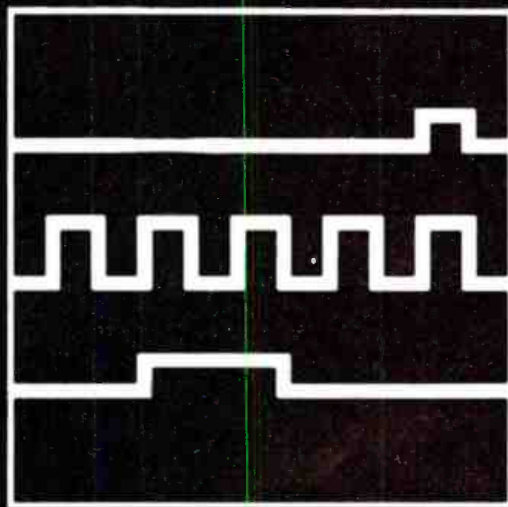

DIGILOGIC

Discover how digital computer techniques have revolutionized television broadcast equipment.

From:



SARKES TARZIAN SYSTEMS

Bloomington, Indiana

Circle 40 on Reader Service Card

Continued from page 12

statute and based on a percentage of gross. A single place for the deposit of license fees also would be stipulated.

3) The cable industry would honor blackouts of professional sports contest broadcasts along the lines of existing law.

4) Copyright legislation must place no restrictions on program originations by cable systems or on the reception of programs which are not copyrighted.

Phillips, Nizer, Benjamin, Krim and Ballon, representing the crucial position of the film industry, would divide CATV into three categories paralleling the FCC's top-100 market division. Class one: top 75 markets or other markets with four or more commercial TV stations. Class two: remaining stations in the top-100 category or other markets with three commercial TV stations. Class three would consist of all other CATV systems. Class two systems would be recategorized as class one systems when they achieve 20-percent market penetration or three years after beginning operations or after January 1, 1974, whichever occurs sooner.

Making the fact clear that the

film industry law firm does not speak for all motion picture companies, Warner Brothers-Seven Arts made a separate filing calling for "full copyright protection" against CATV relay of copyrighted programs, with but two exceptions:

"1) All CATV systems in the Grade A contour of commercial TV broadcast facilities may pick up local signals royalty-free (unless the system deletes or inserts commercials).

"2) All CATV systems in markets with fewer than three network affiliated television systems, if they so desire, may import, royalty-free (unless the system deletes or inserts commercials), from the nearest available stations on a non-duplicating program basis, sufficient distant signals to enable them to carry a total of three network affiliated stations. However, the right to import additional signals beyond three will be subject to full copyright protection and negotiation with copyright owners."

Both the film and broadcast industries appear to have aligned themselves behind the copyright law revision approved in 1967 by the House Judiciary Committee—Section 111. That legislation pro-

vided for a compulsory fee for local signals and complex individual contracts forbidding advertising and making originations difficult.

In the light of the Supreme Court's June/68 decision favoring CATV's copyright position with respect to signals received from the air, Section 111 or any other legislative attempting to group CATV under a general copyright statute now appears inappropriate and dated. As Frederick W. Ford of NCTA put it in a letter to Sen. McClellan, "... it would not be illogical for the CATV industry to fight any CATV inclusion in a copyright statute with every resource possible."

The estimated combined revenues of the various copyright owners exceeds \$2-billion annually. This compares with annual revenues of perhaps \$150-million for the entire cable industry.

Sen. McClellan has summoned his subcommittee to a private hearing two days after congress convenes on January 6. By the time the subcommittee meets, the 20-odd copyright interests involved will have seen drafts of the proposed legislation and expressed their comments.

2x2 slide projectors for the television film chain

by **SELECTROSLIDE**

Spindler & Sauppe offers the broadest line of slide projectors for the television industry ... seven models in all. There's one to fit your requirements exactly: color or monochrome; uniplex or multiplex; forward or reverse actuation; sequential or random access operation; 16-slide to 96-slide capacity. All built to the highest professional standards. Write for complete information.



spindler & sauppe inc.
1329 grand central
avenue / glendale
california / 91201



SPECTRUM 32: The most advanced slide projector available. 32 slide, for color or monochrome chains. Many exclusive features.



MODEL 332: Workhorse of the industry, now improved. 32 slide, for monochrome chains. Model 322: single turret for 16 slides, monochrome or color.




MODEL SLX-TV: 96 slide, random access. SLS-TV: 48 slide, random access. SLD-TV 96 slide, sequential. SL-TV: 48 slide, sequential. SLR-TV: 48 slide, sequential forward/reverse. All for monochrome or color chains.

Circle 42 on Reader Service Card

TAPECASTER® T C M

It all measures up to the fact that
Tapecaster models are built better

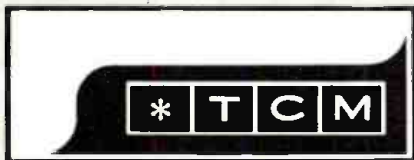

Box 662 — 12326 Wilkins Avenue
Rockville, Maryland 20851
Phone: (301) 942-6666

Circle 43 on Reader Service Card

"IT'S GOOD BUSINESS
TO HIRE THE HANDICAPPED."

ISN'T THAT A GREAT IDEA, SNOOPY?



THE PRESIDENT'S COMMITTEE ON EMPLOYMENT
OF THE HANDICAPPED, WASHINGTON, D. C.

View Chicago's Loop
from Chicago's Lake

LAKETOWER

Lake Shore Drive at Ohio Street

inn

250 delightful rooms offering
motel informality and convenience
with hotel luxury and services

Free inside parking • Free continuous station
wagon service to and from the loop, theatres,
shopping • Free TV/radio in every room •
Free ice dispensers on every floor • Dining
Room • Coffee Shop • Cocktail Lounge •
Room Service • Automatic Dial Telephones •
Individual room controls for air-conditioning
and heating • Meeting and banquet facilities.

Singles from \$12. Doubles from \$16.

Phone (312) Superior 7-4700

TWX 312-222-0108



Circle 41 on Reader Service Card

Continued from page 71

hear this message because he's hard of hearing. Do him a favor. Put his name on the mailing list of (Hearing Aid Company). These people will send him intelligent literature that will make him realize that he *could* be getting somewhat deaf. It's no disgrace to have a hearing loss, but it's an act of friendship to subtly call this to his attention. Don't put it off, but do it now! Make a list of your friends and relatives who need (Hearing Aid Company's) therapy and send it to (Hearing Aid Company and

**THE
LEADER
IN
CATV
TOWERS**



**"Quality—Service
and Price!"**

Yes, quality, service and price on CATV systems are the reasons for Fort Worth Tower's position as the industry's leading supplier. Experience gained as a pioneer supplier of CATV enables Fort Worth Tower to provide you with a quality product at a price that is reasonable and attractive.

Take advantage of our experience. For assistance in systems planning, engineering and complete systems quotations . . .

CALL OR WRITE TODAY

Fort Worth Tower

COMPANY, INCORPORATED

P. O. Box 8597, Fort Worth, Texas
(817) JE 6-5676

— Associated Companies —
Tommy Moore, Inc.
Big State Engineering, Inc.
Tower Construction Finance, Inc.

Circle 44 on Reader Service Card

Address). If you find yourself increasing the volume of your radio to hear this message, well, we just gave you a good idea too. Write *now* to (Hearing Aid Company, address).

Mr. Vaughn. I hope this answers

LITERATURE of INTEREST

For additional data, circle number
shown on Reader Service Card.

Rotary switches—half-inch subminiatures—are described in a bulletin by Oak Mfg. Co. Available in both 30- and 60-degree throw configurations, the switches described are gold-plated and have silver-alloy contacts. **150**

Emi/rfi shielding and moisture seal combination is featured in three data sheets from Technical Wire Products. Called "Consil," the seal is a fine network of silver particles with silicone rubber-filled openings. **151**

Rectifier modules are detailed in a 12-page application note, N136, from Unitorde. Included are illustrations of the variety of mounting configurations made possible by these self-stacking silicon "doorbell" modules. **152**

Cable plug for use with 0.141-in. diameter semirigid coaxial cable is presented by Sealectro in Conhex Product Bulletin CX-119A. The new connector is made of gold-plated stainless steel, and can be soldered directly to coaxial cable's solid copper jacket. **153**

High-temperature cable performance story appears in an illustrated brochure from Boston Insulated Wire & Cable. **154**

Instant slide presentation system requiring less than five minutes from taking a picture to projecting it on a screen, is detailed in Genarco's new bulletin. System combines Polaroid MP-3 Industrial View Land camera and Genarco's 3000-watt 3¼" X 4-in. slide projector. **155**

Digital instruments are discussed in Simpson Electric Co.'s twelve-page illustrated catalog. Featured are: a VOM, an electric counter, Model 2700 digital system, three matching precision strip chart recorders, a multirange milliohmmeter and multirecorders. **156**

Solid state relays are discussed in Catalog 750 published by Ohmite Mfg. Co. Application data are included in graph form. **157**

TeleMation Vidicon Camera is presented in a four-page brochure from TeleMation, Inc. **158**

your question. One thing more, prepare your commercials, tape them and let your prospective sponsor read the copy as he listens to the tape. This will make him give undivided attention to the commercial and give you double the chance to make the sale. **BM/E**

Power supplies are detailed in 40-page Catalog 154 created by Electronic Research Associates. Included are technical descriptions & specifications, unit listings, prices and availability as well as data on physical size and electrical connector. **159**

Control cables—their uses, ratings, insulation, jacketing and color coding—are described in a four-page reference sheet from Rome Cable. **160**

"Electronics for Everyone" is the title of Allied Radio's Catalog, 280. Includes 536 pages—from high fidelity components to electric guitars. **161**

Function, operation and objectives of International Correspondence Schools are explained in a 384-page manual. Courses of study include, "Radio and Television with Equipment Training," "Hi-Fi Stereo and Sound Systems Servicing," and "Telephony, Electronics and Radio Communications." **162**

"The High and Mighty" is the title of General Electric's 16-page, four-color brochure (GEA-8529). Described are GE's history, facilities and capabilities in designing, building and installing TV transmitting antennas. **163**

"Computer-Aided Drafting with CCTV" is the title of technical application bulletin (8-92) released by Cohu Electronics. Described is computer system built for use at Rohr Corp. **164**

Precision voltmeters are the subject of a 16-page booklet from John Fluke Mfg. Considered is the difference between digital and differential voltmeters, speed of measurement, relationship between accuracy and resolution and specmanship. **165**

"Miniature Chart Recorders" is the title and subject of Rustrak Instrument Division's 20-page catalog. **166**

"Hazard Warning Lights for Attended Towers." is the title of Hughey & Phillips, Inc.'s catalog. Included are data sheets describing specifications covering tower lighting and accessories, tower obstruction lighting kits and control units, replacement parts price list, special kits for tall tower obstruction lighting and tall tower specifications guide. Kits are designed to meet FCC and FAA requirements. **167**

BM/E CLASSIFIED MARKETPLACE

CLASSIFIED ADVERTISING RATES

DISPLAY CLASSIFIED ADVERTISING: \$22.50 per inch 1x; \$22.00 per inch 3x; \$21.00 per inch 6x; \$20.00 per inch 12x. ALL OTHER CLASSIFIED ADVERTISING 25¢ per word; minimum \$3.00. BLIND BOX NUMBER: No extra charge. Replies sent to address below will be forwarded to you. PAYABLE IN ADVANCE; send check with order. CLOSING DATE: 5th of 2nd month preceding issue date.

BM/E, Monterey and Pinola Avenues, Blue Ridge Summit, Pa. 17214 Phone 717/794-2191

BUSINESS OPPORTUNITIES

REWARD! I will pay five dollars for every detailed personal successful sales experience that I can use in my new book, RADIO SALES MANUAL, soon to be published. Mail YOUR success stories to Si Willing, Winnsboro, Louisiana 71295.

HELP WANTED

Radio Station Manager for Oklahoma daytimer. Excellent town, good market. Want all-around man, oriented on sales. Salary \$750.00 a month plus car, and bonus. Ownership possibility to right man. Give full details including references. All replies confidential. Don't phone—write John Morris, The Free-Lance, Henryetta, Okla. 74437. Engineer with good maintenance background. Some switching required. Full color operation. Good equipment well maintained. Full employee benefits plus good area to live in California. Good man will make over 10M first year. Contact Chief Engineer, KLYD-TV, Bakersfield, Calif.

CHIEF ENGINEER: Extensive transmitter and VTR experience who is willing to work hard in a small operation. Write to Joseph A. Sheridan, President and General Manager, WSWO-TV, P.O. Box 1366, Springfield, Ohio.

Announcer for 5KW full-time Pennsylvania adult music station with heavy accent on news and sports. No. 1 in medium market. Modern operation with top sound. No maintenance or selling. Good salary and fringe benefits. 215-696-3690.

Engineering position available to work with PC-70's, VR-2000's and TK-27's in outstanding metropolitan VHF operation. First Class license required. Write Box 169-11, c/o BM/E, Blue Ridge Summit, Pa. 17214.

First Class technician for east Pa. 5,000 watt full-time station. Well-established clean operation offers profit-sharing plan, other good benefits. Box 169-12, c/o BM/E, Blue Ridge Summit, Pa. 17214.

WNOG in Naples, Florida, NBC affiliate needs first phone night man—no maintenance. Send information and realistic salary immediately to John L. Norman, Program Director, P.O. Box 1128, Naples, Florida 33940.

#1 and #2 technicians wanted for 125-mile 20-channel CATV system. Construction beginning. Penna. Box 169-13, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Video design engineers and technicians needed in rapidly expanding Vital Industries, Inc., in Gainesville, Florida. Write or call Mr. N. Donoyan (3614 S. W. Archer Road, Tel. 904. 378-1581).

Sales minded station manager. Salary and bonus plus chance to earn part ownership. Small market in Carolinas. Box 169-1, c/o BM/E, Blue Ridge Summit, Pa. 17214.

POSITIONS WANTED

Professional salesman, manager, public relations, degree, proven record & references. Large corporation trained. 10 years experience. Married. 31. Desire permanent position having good growth opportunities. \$12,500 minimum, available January. Box 169-2, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Trouble Shooting husband and wife managerial team. Familiar all phases AM radio. Prefer New England or Atlantic Coastal area. Available early 1969. Permanent. Box 169-3, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Happy Sound Morning Man—Experienced Combo—1st Phone. No Maintenance—Excellent Air Sell. Tight Production. Good References. Minnesota, Iowa, Wisconsin, Dakotas. Box 169-4, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Available immediately, recent broadcasting graduate. 3rd endorsed, creative, willing. Resume tape upon request. 233-2937 after 6:30. Peter Ledwith, 60 Woodmere Rd., West Hartford, Conn. 06119.

POSITIONS WANTED (cont'd.)

Female—40—December grad of Broadcast school. Desire work in copywriting, commercials or production commercials. Relocate. 3rd. Box 169-14, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Negro dj, N.Y. trained. Best jazz in town. Strong on news. Good board. 3rd endorsed. Box 169-15, c/o BM/E, Blue Ridge Summit, Pa. 17214.

DJ/announcer, newscaster, salesman. Negro. experienced, versatile, creative. 3rd endorsed. Tight board, authoritative news any format. Mature. Box 169-16, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Black personality disc-jockey . . . program variety show and jazz. Best radio ratings in the country. Dependable, married. Resume, tape upon request. Box 169-17, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Have FM CP? Let me put it on the air and in the money. First. Family, require 1 year contract. \$175. Box 169-5, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Manager/Comm. manager, best references, small, medium markets. Full responsibility. 36 years old/civic leader. Experienced all phases. Box 169-6, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Experienced dj-announcer, third phone, tight board, good news, commercials. MOR. Interested in New York area. Box 169-7, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Disc jockey, newscaster, salesman, third-endorsed, tight board, experienced, dependable, versatile, creative, and Negro. Box 169-10, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Negro announcer—dependable—experienced. Reliable—can work any type station. Third endorsed. Box 169-18, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Young hip Negro announcer. Real swinger, will travel, broadcasting school graduate, third phone endorsement. 215/472-2741. Box 169-19, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Mature announcer with 20 years experience seeks position with large market station only. Good references. Write Box 169-20, c/o BM/E, Blue Ridge Summit, Pa. 17214.

EQUIPMENT FOR SALE

ANTENNA FOR SALE

1 RCA TFU-24BLS Antenna (Ch. 27) with 1/2 degree electrical beam tilt. Good condition (VSWR 1.1 to 1 or less). 28 sections RCA MI 19089 UHF Trans. line. 3 1/2 inch—20 ft. sections.

Contact: R. J. Wickham, Dir. of Eng. WKOW-TV Madison, Wisconsin 53701

TRANSLATOR POWER now put your translator where antenna should be for best coverage not where power line happens to be. Use a TELAN thermoelectric generator. No moving parts, simple to operate, leave unattended 6-12 months. General Instrument Corp., Thermoelectric Division, Dept. BM, 65 Gouverneur St., Newark, N.J. 07104. 201-485-2100 ext. 481.

Best deals—Spotmaster, Scully, Magnecord, Crown, Amega film equipment, CBS Audimax/Volumax, Metron Modulation Monitor, Langevin, Pultec, Fairchild, Universal Audio, Rek-O-Kut, Gray, Russco, other top brands. Write for information. Finance, trade, lease. Audiovox, Box 7067-55, Miami, Florida, 33155.

Gates FMSB transmitter, excellent condition, operating recently and like new MO5534 Exciter on 100.7. Exciter easily retuned. Also over 500 feet of 3 1/2" rigid transmission line for FM. Available immediately. Real good price. John R. Kreiger, KVET, 113 West 8th Street, Austin, Texas 78701. A.C. 512-GR 8-8521.

Gates 5KW FM transmitter FMSB, excellent condition. Complete with stereo exciter, harmonic trap, tubes, manuals, connections to Gates RDC-10 remote control. Removed from operation for high power. Crated for shipment. Jack Link, KETO-FM, 1411 Fourth Avenue Building, Seattle, Washington 98101.

EQUIPMENT FOR SALE (cont'd.)

REBUILT AND MODIFIED BROADCAST EQUIPMENT

We are now accepting for overhaul, rebuilding, modification FM-AM-TV transmitters

FOB our laboratory

For stations—manufacturers—military and governmental agencies

Modification to CCIR—PAL—CCIR—SECAM standards—customizing by contract, acceptance at laboratory

Richard R. Hayes
President
(214) 231-5511

TELDEX CORPORATION

747 S. Central Expressway
Richardson (North Dallas) Texas 75080

Brand new remote amplifiers, 2 channel remote microphone amplifiers, 2 1/2 inch VU, battery operated, 9 transistors \$95.00 FOB Kokomo. GREDCO, INC. 1830 S. Webster, Kokomo, Ind. 46901. Area 317-883-5688.

Ampex 300, 350, 352, 400, 450 users, for greater S/N ratio, replace first playback stage 12SJ7 with our plug-in transistor preamp. For specifications write VIF INTERNATIONAL, PO Box 1555, Mtn. View, Ca. 94040.

Collins 737 amplifier converted to 4CX5000A tubes, \$1750, f.o.b. Los Angeles. Good condition. Also Moseley SCG-4, 67kc. Generator like new. \$450. Write or phone Adams, KUTE Radio, Occidental Center, Los Angeles 90015.

Collins 830E-1 5kw Solid state stereo generator; GE 8F-3-A 10kw Amplifier with rectifier, amplifier converted to use 3CX2500 tubes. Call Mr. Leggett: 213-681-6777.

Ampex 300 Mastering recorder. Mono Console. Excellent condition. \$975.00. Barbara Allan Productions, Inc., Box 207, Kalamazoo, Michigan. Phone 327-6746.

100 ft. tower \$200.00, 200 \$800.00, 300 \$1500.00, 400 \$2400.00. Groundwire new 68¢ per lb. Bill Angle, 917/752-3040, Box 55, Greenville, N.C. 27834.

Broadcast and recording equipment, new and used, bought-sold-traded. New items listed daily. Maze Corporation, Box 6636, Birmingham, Ala. 35210.

TRY US FIRST. New and used Broadcast equipment and supplies. Package discounts. VHSA, Box 616, Warrenton, N.C. 27589.

Instant Audio!



Model AA-300
Pre-amplifier & 200MW
Power Amplifier, with Input
& Output Transformers.

SPECIFICATIONS:

	MODEL AA-300 PROFESSIONAL AMPLIFIER (200MW)	MODEL AA-500 PROFESSIONAL PRE-AMPLIFIER
Freq. Resp.	= 1db, 20-20K cps, 200MW = 2db, 20-35K cps, 100MW	= 1/2db, 20-20K cps Linear, or RIAA Equalized or NAB Equalized
Harmonic Dist.	< 1%, 20-20K cps, 100MW < 2%, 20-20K cps, 200MW	< 0.5% 20-20K cps
Input Z	50-150Ω, or 600Ω balanced (mu-metal shielded permalloy core transformer) 2K or 100KΩ unbalanced	48KΩ (May be used with input transformers)
Output Z	500Ω & 8Ω (grain oriented transformer) 200MW	5KΩ (May be used with output transformers)
Gain	80db	70db
Circuit	7 transistors 1 thermistor	4 transistors
Power	9VDC, 100MA	9VDC, 5MA
Size	8" L x 2 1/4" W x 1 1/2" H	4 1/2" L x 3" W x 1 1/4" H
Weight	12 oz	2 oz
Price	\$16.95	\$26.95



Model AA-500
Low noise Pre-amplifier
(Linear, NAB, & RIAA Equalized)

ROUND HILL ASSOCIATES, INC.
325 Hudson Street, New York, N.Y. 10013

- Please send me _____ AA-300's @ \$16.95 each.
- Please send me _____ AA-500's @ \$26.95 each.
- My check for _____ is enclosed. Please ship prepaid.
- Please send C.O.D. _____ BME-1
- Please send me, free of charge, your spec sheets on your complete line of amplifiers, oscillators, power supplies and RF Solid State Circuit Boards.

Name _____

Address _____

City _____

State _____ Zip _____

Circle 45 on Reader Service Card

EQUIPMENT FOR SALE (cont'd.)

Schafer stereo automation system. Year old. Excellent condition. Make offer, KTBT, Garden Grove, Calif. (714) 530-5100.

RCA TTU-IB UHF Transmitter. Some parts missing. Exciters alone worth the price. Dick Lange, WHUT, Box 151, Anderson, Indiana 46015.

Complete kit audio proof forms \$3.50 postpaid. Specify AM/FM. Box 2605, Corpus Christi, Texas 78403.

Protect your records. Send for our free LP supply lists. Record Supplies, Hillburn, N.Y. 10931.

One TBM-3500 black McMartin FM modulation monitor like new. Highest offer. Make yours. Box 169-8, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Auricon 400' optical. Magnetic. Zoom. Tripod compl. accessories. Magnasync 400' Mixer & accessories. Box 169-9, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Whatever your equipment needs . . . check first with Broadcast Equipment and Supply Co., Box 3141, Bristol, Tennessee 37620.

6 element circular vertical and horizontal antenna. Price \$2,400.00. Box 169-21, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Towers, broadcast, microwave, CATV, TV, new and used. Phone 224-9922, Tower Maintenance, Inc., 2408 Old St. Rd., Tallahassee, Fla.

BARGAINS: CCTV Cameras, monitors, send for free list. Box 169-22, c/o BM/E, Blue Ridge Summit, Pa. 17214.

Japanese Electronics. New products monthly! \$1.00. Money-back guarantee. DEE 10639 BM Riverside, North Hollywood, Calif. 91602.

TECHNICAL SERVICES

AMPEX HEAD ASSEMBLY

Relapping and replacement head service for all AMPEX professional studio model recorders. Our precision relapping extends head life for maximum use. Brand new shelf stock replacement heads of our manufacture available when relapping not advisable. Prices include thorough assembly cleaning, optical and electrical inspection and complete testing on Ampex equipment. Monaural assembly relapping . . . \$35.00 complete. Monaural assembly replacements . . . \$119.50 complete. "Loaner" assemblies available. For more data, contact LIPPS, Inc., 1630 Euclid St., Santa Monica, Calif. 90404 (213) EX 3-0449.

IN CANADA...

for CATV SYSTEM: ENGINEERING —
PLANNING — CONSTRUCTION —
TECHNICAL SERVICES — MAINTENANCE

DEPEND ON EXPERIENCE

NORAM CABLE CONSTRUCTION, LTD.

1770 Albion Road • (416) 741-0566
Rexdale, Ont., Canada

DON'T BE AN AUDIO DROPOUT in your market area. Let BROADCAST EQUIPMENT BUILDERS take care of your tape cartridge rewinding needs. Call or write Quin Morrison for further information. Route 8, Box 718, Fayetteville, N.C. 28304. B-E-R . . . THE SPECIALISTS!

PROGRAM SERVICES

CARTOON SPECIAL

New lab prints free with each order

Contact the CATV program specialists
American Diversified Services
Box 975, Kingsport, Tennessee 37662
Phone area 615 239-9301

"DEEJAY MANUAL" is a folio of Gags, Ideas, Breaks, Gimmix, Fun for the working deejay. Special \$3.00 with this ad. Write for free "Broadcast Comedy" catalog. Show-Biz Comedy Service (Dept. E) 1735 E 26 St., Brooklyn, New York 11229.

35,000 professional comedy lines! Forty speakers' joke books plus current comedy, a topical humorous service period. Catalog free. Sample selection. \$5. John Rain Associates, Inc., 232 Madison Avenue, New York City 10016.

PROGRAM SERVICES (cont'd.)

DEEJAYS! 6000 classified gag lines for radio, \$5.00! COMEDY CATALOG FREE! E. Orrin, Boyer Rd., Mariposa, Calif. 95338.

INSTRUCTION

FCC License in six weeks from the nation's largest license school. Compare reputations and success rates before you invest. Professional announcing training on the nation's only fully school-operated commercial station used solely for training. School locations in Dallas, Houston, Atlanta, Chicago, New Orleans and Minneapolis. Write Elkins Institute, 2603 Inwood Road, Dallas, Texas 75235.

R.E.I.'s famous (5) week course for the First Class Radio Telephone License is the shortest, most effective course in the nation. Over 98% of R.E.I. graduates pass F.C.C. exams for 1st class license. Total tuition \$350.00. Job placement free. Write for brochure Radio Engineering Incorporated Schools, 1336 Main Street, Sarasota, Florida 33577—or 3123 Gillham Road, Kansas City, Missouri 64109—or 809 Caroline Street, Fredericksburg, Virginia 22401—or 625 E. Colorado Street, Glendale, California 91205.

First phone in six to twelve weeks through tape recorded lessons at home. Sixteen years FCC license teaching experience. Proven results. Bob Johnson Broadcast License Training, 1060D Duncan, Manhattan Beach, Calif. 90266.

CONSULTANTS

JOHN H. MULLANEY and ASSOCIATES

Suite 71,
1150 Connecticut Ave., N.W.
Washington, D. C. 20036
Phone 202-223-1180
Member AFCEE

ROSNER TELEVISION SYSTEMS

ENGINEERS	CONTRACTORS
120 E. 56 St.	29 South Mall
New York	Plainview
N. Y. 10022	N. Y. 11803

JANSKY & BAILEY

BROADCAST-TELEVISION DEPARTMENT
Atlantic Research Corporation
A Division of
The Susquehanna Corporation
1812 K Street N.W.
Washington, D.C. 20006
Member AFCEE (202) 296-6400

USE BM/E's CLASSIFIED MARKETPLACE TO REACH OVER 21,000 BROADCASTERS!

Please run the ad attached in BM/E's CLASSIFIED MARKETPLACE in your next:

- 12 issues
- 6 issues
- 3 issues
- 1 issue

in a space of _____ inches
words under the Classification of:

.....
.....
.....
 Check enclosed
Name _____
Station or Co. _____
Address _____
City _____ State _____

BM/E Classified Advertising Department, Monterey Ave., Blue Ridge Summit, Pa. 17214. 717/794-2191.

*Also in Broadcast Equipment Buyers' Guide

Alford Manufacturing Co.	64	Rohn Cover	4
*Ampex Corp.	42, 43	Round Hill Associates, Inc.	76
Audio Devices, Inc.	25	Russco Electronics Mfg.	68
Ball Brothers Research Corp.	17	Sarkes Tarzian 71	
*CBS Laboratories, A Div. of Columbia Broadcasting Systems, Inc.	5	Sitco Antennas 62	
Cleveland Institute of Electronics	63	*Sparta Electronic Corp. 24	
*Collins Radio Co. 61		Spindler & Sauppé, Inc. 72	
*Cosmicar Optical Co., Ltd. 68		Superior Continental Corp. 13	
Dynair Electronics, Inc. 9		Tapecaster TCM 73	
Fairchild Recording Equipment Corp. 67		Tektronix Inc. 23	
Filmline Corp. 15		*TeleMation, Inc. 26	
Fort Worth Tower Co., Inc. 74		*Television Presentations, Inc. 19	
Fuji Photo Optical Co., Ltd. 64		Telex Corp. 65	
Gates Automatic Tape Control Div., A Sub of Harris-Intertype Corp.	58		
Granger Associates, Bauer Broadcast Products Div. 14			
*Hewlett-Packard 3			
Hughey & Phillips Inc. 78			
IEEE 62			
International Nuclear Corp. Cover	3		
International Video Corp. 31, 32			
Jampro Antenna Co. 18, 60, 77			
Lake Tower Inn 73			
Lenkurt Electronics, Sub. of General Telephone & Electronics	69		
McMartin Industries, Inc. 10, 11			
Marathon Broadcast Equipment Sales Corp. 22			
Memoex Corp. 20, 21			
Michigan Magnetics, A Div. of VSI Corp. 68			
Microwave Associates 7			
3M Co., Mincom Div. 56, 57			
Multronics, Inc. 66			
Pruzan Co. 48			
QRK Electronics Products 70			
*Riker Video Division Cover	2		

ADVERTISING SALES OFFICES

Charles C. Lenz Jr.

Manager, Advertising Sales

NEW YORK CITY

820 Second Avenue
New York, New York 10017
212-661-0450

New Jersey & Mid-Atlantic States

Richard M. Millar
Southeastern States
Charles C. Lenz, Jr.

NEW ENGLAND

41 Stevens Lane
Cohasset, Massachusetts 02025
617-383-0029
Donald B. Kennedy

MIDWEST

612 North Michigan Avenue
Chicago, Illinois 60611
312-642-3774
Charles E. Moodhe
Ralph Bergen

WEST COAST

1245 East Walnut Street
Pasadena, California 91106
213-795-1528
213-684-0590 (Los Angeles)
Lawrence C. Papp
Thomas Boris
Jules E. Thompson Co.
1111 Hearst Building
San Francisco, California 94103
415-362-8547
William J. Healey

JAPAN

Nippon Keisoku Inc.
P.O. Box 410
Central Tokyo, Japan
Yoshi Yamamoto

the new
JAMPRO

uhf
ZIG ZAG
offers greater
flexibility
and lower cost!



The ZIG ZAG Television Antenna offers more pattern & gain per dollar than any other uhf antenna.

High power gains are available with many computerized vertical patterns. Omnidirectional and cardioid patterns are available which will provide power gains from 8 to 56 and directional gains as high as 215! Power capabilities of 60 or 120 KW.

Fiberglass radomes are available.

Write for complete catalog and prices.

JAMPRO

ANTENNA COMPANY

6539 POWER INN ROAD | SACRAMENTO, CALIFORNIA
A DIVISION OF COMPUTER EQUIPMENT CORPORATION

Circle 46 on Reader Service Card

To Meet All
Federal Regulations*

**SPECIFY
& INSIST**

on
Hughey & Phillips

The leader in tower
obstruction lighting
and control systems.

* FCC — FAA and Nat'l. Elec.
Code Regulations



**300MM BEACONS
SINGLE AND DOUBLE
OBSTRUCTION LIGHTS**



**APPROVED
by the FAA**



TOWER LIGHTING ISOLATION TRANSFORMERS

750, 1750, 3500, 5000, 7500 Watts

FEATURING...

- HIGHER EFFICIENCY
- IMPROVED REGULATION
- FIBERGLAS INSULATION
- EPOXY ENCASED
- VERSATILE MOUNTING



CONTROL UNITS to meet
Standard or Special Requirements.



**LAMP FAILURE
ALARM SYSTEMS
FOR UNATTENDED
INSTALLATIONS**

**TUBELESS PHOTOELECTRIC
CONTROL UNITS**

Indoor or Outdoor
Many Sizes and Voltages



BEACON FLASHERS
Single and Multi-circuit
Indoor or Outdoor

FOR TALL TV TOWERS



**LAMP FAILURE
INDICATOR PANELS**

Request our exclusive TALL TOWER
Specification Guide.

HUGHEY & PHILLIPS, INC.

Manufacturers of
300mm Beacons, Obstruction Lights, photo-controls,
Beacon Flashers, Microwave Tower Hazard Light Control
and Lamp Failure Alarm Systems, Complete Kits for:
Tower Hazard Lighting, Deicers, & Talking Circuits, Tower
Lighting Isolation Transformers, Airport Runway Lighting

3050 N. California St., Burbank, California 91503

Circle 47 on Reader Service Card

FROM THE EDITOR

A Farce, Unfortunately

A *BM/E* reader from overseas dropped into the office the other day to ask our advice.

He had just read the President's Task Force report on communications and was eager to offer the insatiable American public multiple programming. He whipped out a plan and asked how we thought the FCC would receive it. It was incredibly elegant and simple—too simple for the FCC.

Casting about for an approach to explain the facts of life, we asked if he was at all familiar with the FCC's requirements. He said yes, he'd read the Communications Act of 1934 and had kept up to date by listening to Radio Free Europe broadcasts.

"You have a most enlightened regulatory group," our guest enthused, "and my plan is aimed to fulfill the FCC's objectives. My plan is predicated on four values: 1) a TV outlet for local community expression; 2) an outlet for every community; 3) free TV and 4) maximum possible multiple programming. That's what the FCC wants, isn't it?"

We had to admit that it was, but covered ourselves by suggesting that there were other complications.

Rather than recount this conversation exactly as it occurred, we'd better give you Mr. G's plan. It was designed for two- and three-station communities within the top 100 markets such as a Decatur, a Cedar Rapids, or a Terre Haute. Mr. G's proposal called for: 1) construction of a uhf station limited to 10KW power; 2) a cable franchise (nonexclusive to include 20 channels): 12 channels for TV signals; three channels for local neighborhood origination; and the remainder available for assorted public service transmissions. The uhf signal would be received free since it was over the air. Ten channels of TV would cost \$5 a month; the full 20 channels, \$8 a month.

Mr. G. had modest advertising rates worked out for the "U" and the cable and explained that studios at the "U" were available for cablecasting and that he'd have one or two mobile vans for on-the-scene telecasts, "U" or cable.

"Unique," we said, "but if somebody has already applied for a "U", or if the existing "V"s show how your cable saturation will hurt them through dilution of viewers, the FCC will turn you down."

"I've already thought of that," our bright foreigner responded. "If any "U"s complain, I'll buy them out for their current investment. And I have another trick up my sleeve prompted by Mr. Schildlause's talk on subsidizing "Us." If the existing stations can show dilution, we'll raise the monthly cable fee an extra \$5 and divide the proceeds among the local stations, that are hurt. With 10,000 subscribers, I have \$50,000 a month to offer to local stations—maybe a little less after paying copyright or retransmission fees.

Surprised, we murmured, "You think the viewers will pay?"

"Yes, but I'll give them a choice not to. For five channels, there will be no extra fee. We'll let the public decide." Mr. G. then showed us a list of 30 cities in which he proposed to apply for a chance to bring more TV to the public.


We had to hit him squarely this time. "You do know the FCC will not grant such multiple ownership?" we said. "But why?," he protested. "Didn't you notice that I am letting a local group of citizens decide what the local programming effort should be?"

"The FCC simply thinks that too much concentration of media corrupts; that's a tenant not in the Communications Act."

Our friend broke into a smile. "I have the answer," he declared. "I'll own only one system and franchise elsewhere!"

James A. Lippke, Editor

TCA3 TRANSISTORIZED CAMERA AMPLIFIER



The dependable TCA3 has almost become standard equipment in all image orthicon cameras. It replaces the vacuum tube pre-amplifier and is designed so it may be quickly mounted within available space in the camera without permanently disabling the vacuum tube amplifier. This cool little amplifier, about the size of a package of cigarettes, can add years to the life of cameras. The TCA3 sells for \$295.00 F.O.B. Nashville, Tennessee.

For complete information, write to:
INTERNATIONAL NUCLEAR CORPORATION
608 Norris Ave • Nashville, Tenn. 37204 • Ph.: (615) 254-3365
Circle 50 on Reader Service Card

TC1 CLAMPING AMPLIFIER




The TC1 Clamping Amplifier employs tip clamping to remove low frequency signal deficiencies without disturbing burst and other chrominance information in or about back porch levels. The clamped stage utilizes a field effect transistor driven by a balanced bridge circuit. This advanced design technique produces highly effective and stable clamping. The TC1 Clamping Amplifier sells for \$325.00 F.O.B. Nashville.

For complete information, write to:
INTERNATIONAL NUCLEAR CORPORATION
608 Norris Ave • Nashville, Tenn. 37204 • Ph.: (615) 254-3365
Circle 51 on Reader Service Card



A COMPLETE REED STUDIO SWITCHING SYSTEM

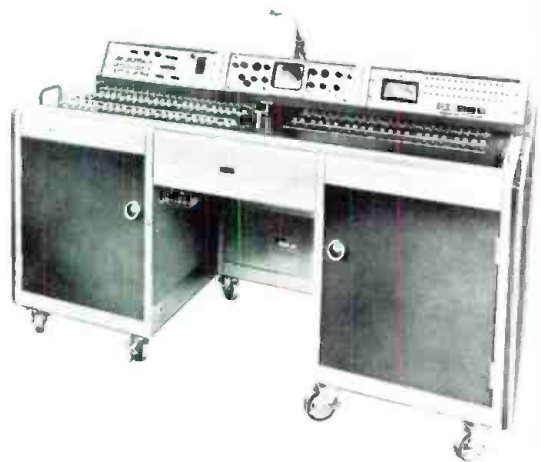

We build them, in a few weeks, to your exact requirements. No limit on number of input and output buses. A single switching cross-bar can be operated from any number of studios, or master control, or VTR positions. Single re-entry, dual re-entry, keying buses, lap-dissolve buses, special effect buses, previews, spares, audio-follow-video, audio-not-follow-video, cut-bars, preset and transfer switching, and even computer-operated switching, are available for the asking.


For complete information, write to:
INTERNATIONAL NUCLEAR CORPORATION
608 Norris Ave • Nashville, Tenn. 37204 • Ph.: (615) 254-3365
Circle 53 on Reader Service Card

TDA2D VIDEO/PULSE DISTRIBUTION AMPLIFIER



The now-famous TDA2 Distribution Amplifier, in use at most television stations and networks, has a recently added feature. The "D" stands for Differential Input, which we added to the TDA2. And not only did we add a differential input, we subtracted \$30.00 from the price. Instead of \$325.00, we're selling the new improved TDA2D for \$295.00 F.O.B. Nashville, Tennessee. The compact TDA2D fits neatly into 1 3/4 inches of panel space and produces virtually no heat.

For complete information, write to:
INTERNATIONAL NUCLEAR CORPORATION
608 Norris Ave • Nashville, Tenn. 37204 • Ph.: (615) 254-3365
Circle 52 on Reader Service Card

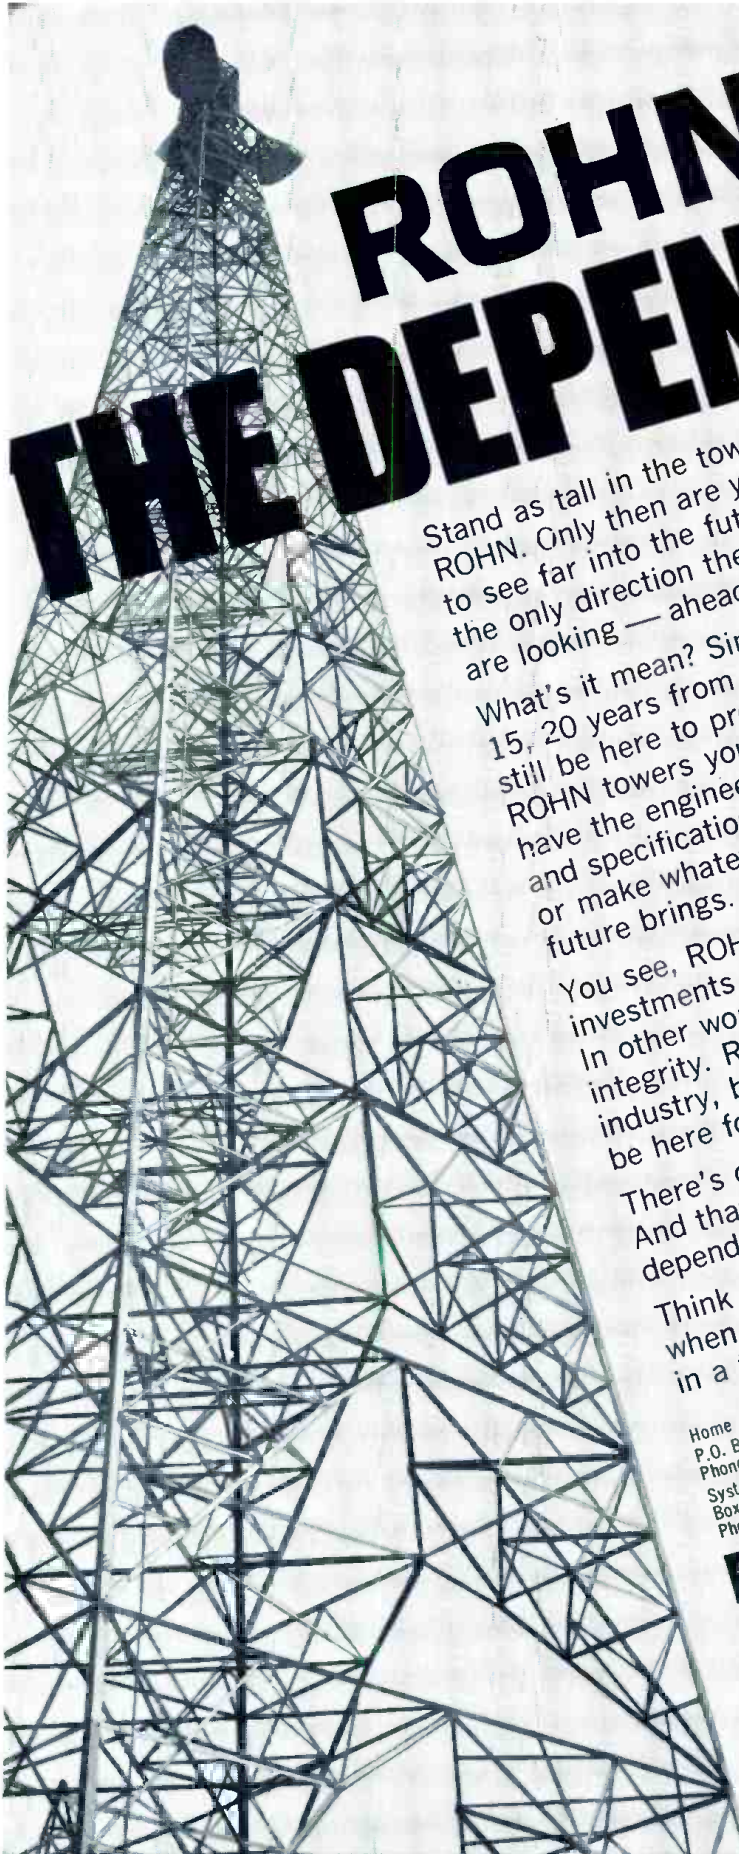

ROHN® THE DEPENDABLES

Stand as tall in the tower field as ROHN. Only then are you high enough to see far into the future. That's the only direction the men at ROHN are looking — ahead.

What's it mean? Simply that in 10, 15, 20 years from now, ROHN will still be here to provide service for the ROHN towers you erect today. Still have the engineering files, drawings, and specifications to update, upgrade, or make whatever changes the future brings.

You see, ROHN has tremendous investments in plant and equipment. In other words, financial and personal integrity. ROHN supports this industry, believes in it, and plans to be here for a long, long time to come. There's only one way to do that. And that's to be absolutely dependable.

Think how important this is when you make an investment in a tower!

Home Office — Factory
P.O. Box 2000, Peoria, Illinois, U.S.A. 61601
Phone 309-637-8416 TWX 309-697-1488
Systems Office —
Box 877, Richardson, Texas 75080
Phone 214-AD1-3481

ROHN®

Western Office —
310 Quincy Street, Reno, Nevada 89502
Phone 702-322-9300
Eastern Office —
P.O. Box 2101
Hanover, Mass. 02339
Phone 617-826-2511
Southern Office —
P.O. Box 6537, Birmingham, Ala., 35217
Phone 205-841-1789

Circle 54 on Reader Service Card