


FEBRUARY 1981

\$3.00

# BME

BROADCAST MANAGEMENT/ENGINEERING

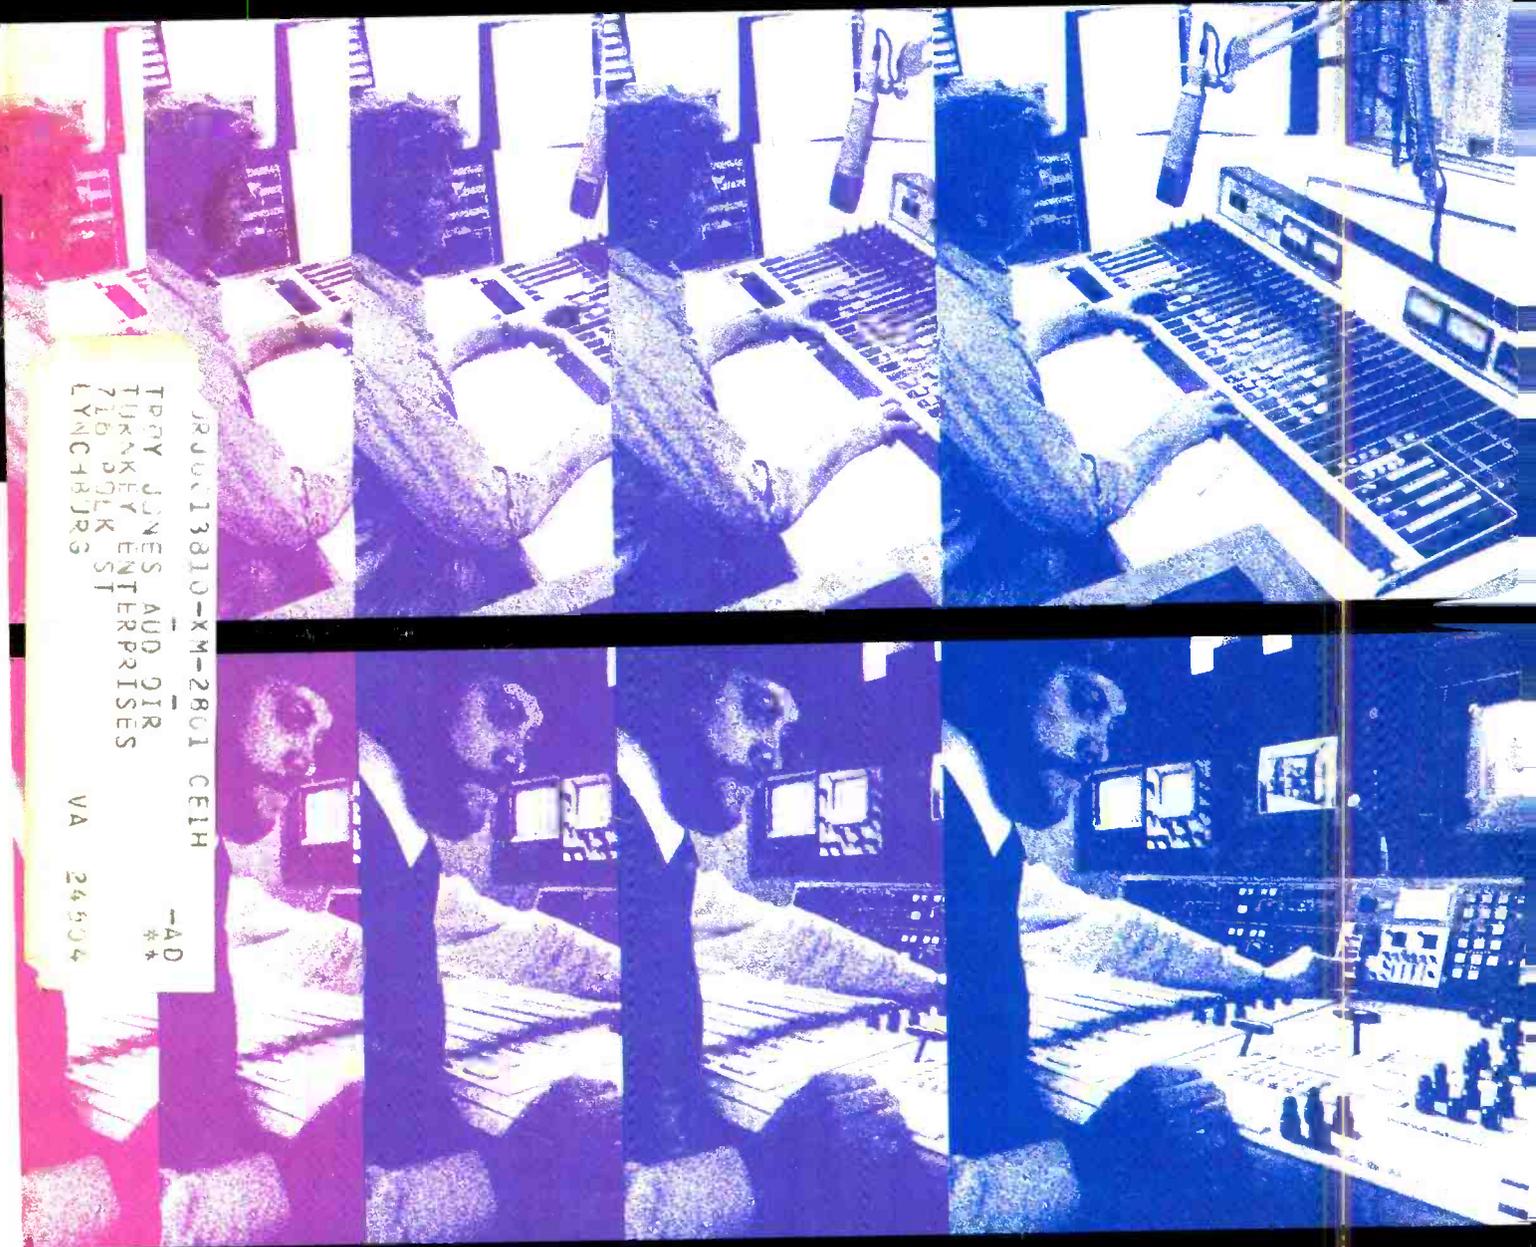

JRDU 13810-XM-2801 CEIH  
 TROY JONES AUD DIR  
 TURNKEY ENTERPRISES  
 718 PDLK ST  
 LYNCHBURG VA 24504

-AD  
 \*\*

**RADIO AND TELEVISION:  
 MOVING FROM HERE TO DIGITAL.**

 **HITACHI**  
Hitachi Denshi Ltd

**HR-200**



OFF ON



VIDEO/RF AUDIO 1 AUDIO 2 AUDIO 3



VIDEO AUDIO 1 AUDIO 2 AUDIO 3

SERVO  
ALARM  
SYSTEM  
ALARM

REMOTE

TAPE

VIDEO

AUDIO 1

AUDIO 2

AUDIO 3

LOCAL

RE

RECORD SELECT

ASSEMBLY  
NORMAL INSERT

RECORD SAFETY

RECORD SAFETY

RECORD

PLAY STOP

HOURS MINUTES

RESET PAUSE EJECT

JOG SHUFFLE REV

# Hitachi-5 Competition-0

## That's the score in one-inch VTR technology.

We've gone the first generation of TYPE C machines *five* better ...to help you get all the potential of one-inch out of your video installation. Here's what the competition *doesn't* give you.

### 1. Retracting Tape Guide

Retracts for unequalled ease of threading; repositions with one micron accuracy for up to two million threadings. Provides the reliability of a quad thread system in a one-inch format.

### 2. "PRO" Tape Path

The protective reverse oxide ("PRO") configuration of the tape path means *only* the video and audio heads touch the oxide surface. All other transport mechanisms guide the tape by its reverse side. Result: noticeably reduced dropouts; longer tape life.

### 3. Instant Head Replacement

Pre-aligned head design permits easy replacement of video heads in three minutes. No adaptors or jigs; no adjustments required.


### 4. Audio and Video Confidence

The others only let you *see* what you're taping. We let you *see* and *hear* everything being recorded...simultaneously.


### 5. Non-contact Tape Shuttle System

In shuttle and standby modes, tape rides on a cushion of air. Increases head and tape life immeasurably. Cuts frictional resistance, yielding shuttle times of only 80 seconds end to end.

We could go on. With impressive features like microprocessor control; broadcastable slow motion; one-touch shuttle and jog; front access circuit boards; audio spot erase, and on and on. But why run up the score, when it's already no contest? See the Hitachi HR-200, it's equally impressive portable HR-100 model, and companion TC-200 Time Base Corrector.

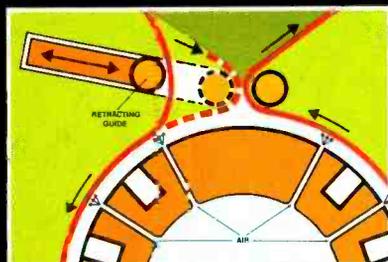

• Tape guide retracts for threading ease • Air drum eliminates head contact in shuttle / standby modes

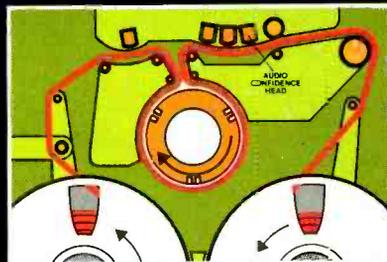

• Full audio and video confidence  
• "PRO" tape path reduces dropouts



Hitachi Denshi America, Ltd.

Tomorrow's Technology Today

175 Crossways Park West, Woodbury, N.Y. 11797 (516) 921-7200


• New York • Chicago • Los Angeles • Atlanta • Cincinnati • Dallas • Denver • Seattle • Washington, D.C.

Circle 100 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# BM/E

BROADCAST MANAGEMENT/ENGINEERING

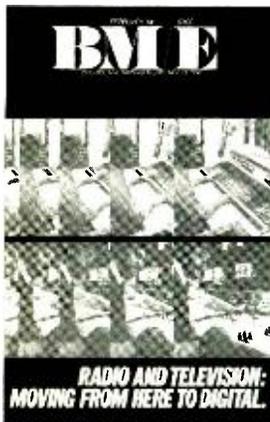

The emerging mass communications market of the 1980s will demand the most radical technical change since color television. Both radio and television broadcasters are preparing to meet the challenges of new media and new audiences

Publisher  
**Charles C. Lenz, Jr.**

Editorial Director  
**James A. Lippke**

Editor  
**David Hawthorne**

Senior Editor  
**Robin Lanier**

Senior Editor  
**Stephen C. Miller**

Senior Editor  
**Joseph DuBovy**

News Editor  
**Eva J. Blinder**

Editorial Assistant  
**Doug Damoth**

Assistant Publisher  
**Djuna Van Vort**

Creative Director  
**Gus Sauter**

Marketing Services Manager  
**Christine Bunish**

Production Manager  
**David Rose**

Advertising Production  
**Deborah Foley**

Editorial Production  
**Heidi DeVos**

Reader Service  
**Randy Applebaum**

Comptroller  
**Steven Abromowitz**

FCC Counsel  
**Lovett Ford and  
Hennessey, P.C.**

---

## FEBRUARY 1981/VOLUME 17/NUMBER 2

---

### 8 Broadcast Industry News

*Radio sheds commercial, public affairs limits: Domestic satellites get big lift from FCC; Gannett forms satellite news firm*

### 17 Radio Programming & Production For Profit

*The program flood is rising*

### 19 BM/E's Program Marketplace

*Another look at Cavox Stereo Productions*

### 25 TV Programming & Production For Profit

*RTNDA: technology versus journalism*

---

## 33 Moving From Here To Digital

---

### 33 The Broadcast Plant: From Here To Digital

*Digital audio and video are the only known technologies capable of meeting long-term industry needs*

### 39 Coming: The Digital March Into Radio

*The digital tape recorder and audio disc are poised just offstage*

### 51 Machine Control At KPIX: Cornerstone To Digital

*Comprehensive equipment control takes a station across the digital border*

### 61 Machine Control Trims Equipment Costs, Prevents Labor Expansion

*Digital control is the light at the end of the tunnel*

### 71 Digital Television Development: A Look Into The Future

*Full digital processing is on the horizon*

### 79 Analog To Digital: The TV Plant In Transition

*Operating broadcast plants with both analog and digital equipment requires planning*

---

### 85 Broadcasters To Be Careful Consumers In 1981

*The eleventh annual Panels of 100 survey of industry needs*

### 91 FCC Rules & Regulations

*Time brokerage satisfies some minority programming needs*

### 97 Great Idea Contest

*Win a calculator—enter the 1981 Great Idea Contest*

### 102 Broadcast Equipment

*BM/E's survey of new products highlights some SMPTE introductions*

---

#### BROADBAND INFORMATION SERVICES, INC.


295 Madison Ave., New York, N.Y. 10017, 212-685-5320, Telex: 644-001

Publishers: **BM/E—Broadcast Management/Engineering**  
**BM/E's World Broadcast News**





BM/E BROADCAST MANAGEMENT ENGINEERING (USPS 059280) is published monthly by Broadband Information Services Inc. All notices pertaining to undeliverable mail or subscriptions should be addressed to 295 Madison Ave., New York, NY 10017. BM/E is circulated without charge to those responsible for station operation and for specifying and authorizing the purchase of equipment used in broadcast facilities in the U.S. and Canada. These facilities include AM, FM and TV broadcast stations, CATV systems, ETV stations, networks and studios, audio and video recording studios consultants, etc. Subscription prices to others \$24.00 one year, \$36.00 two years, Foreign \$30.00 one year, \$48.00 two years. Air Mail rates on request. Copyright 1981 by Broadband Information Services, Inc., New York City. Controlled circulation postage paid at East Stroudsburg, PA.

# THE GVG™ 1600 SERIES INDUSTRY STANDARD SWITCHER LINE CONTINUES TO GROW!

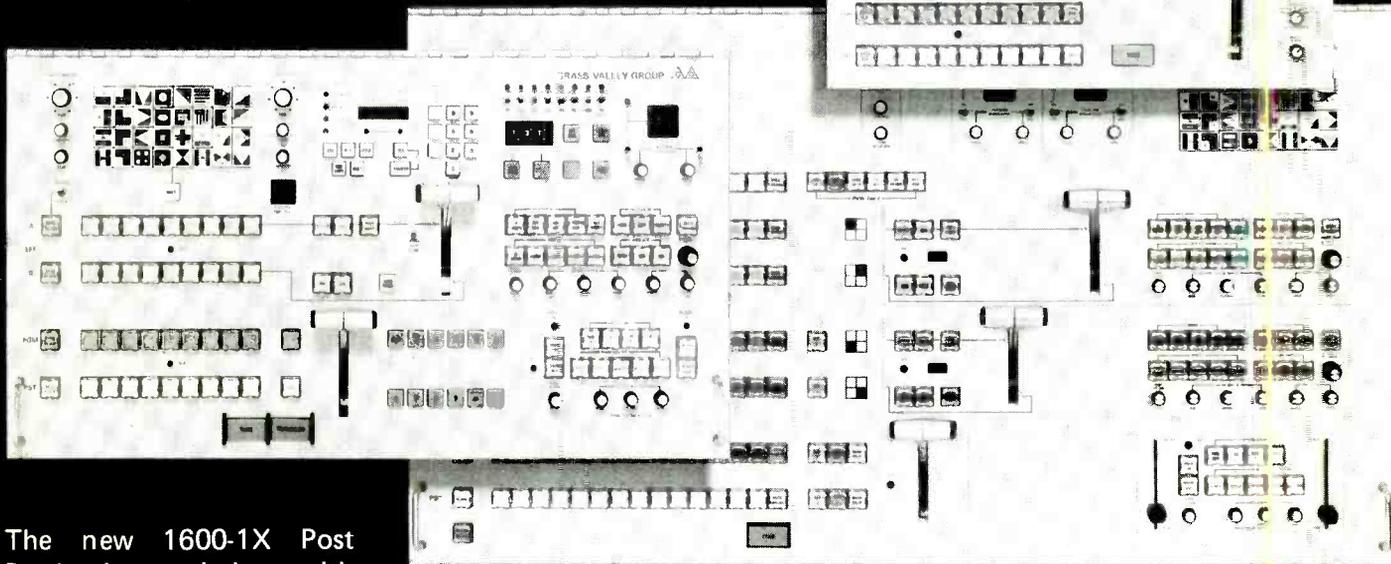

The new 1600-1X Post Production switcher with built-in E-MEM™ effects memory system (above) shows our continuing commitment to the world's most popular switcher line. Industry acceptance of the 1600 Series stems from its workhorse reliability — nearly 1,500 systems are now in service!

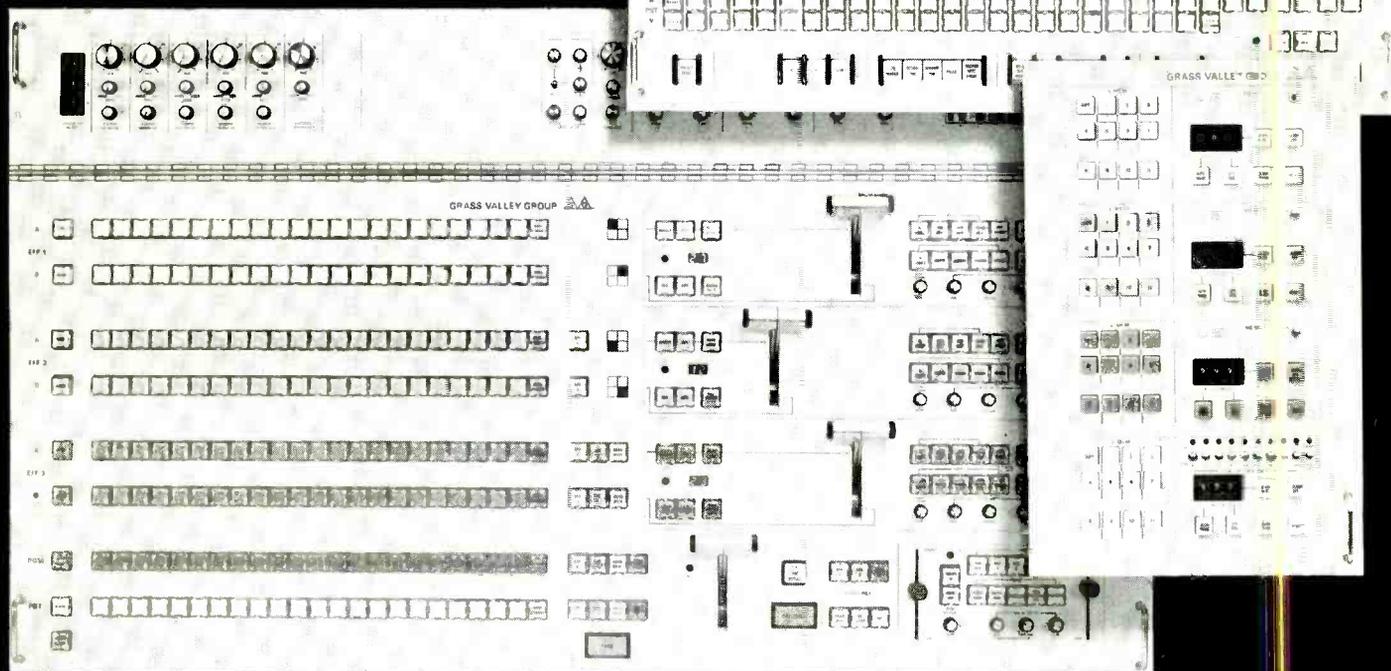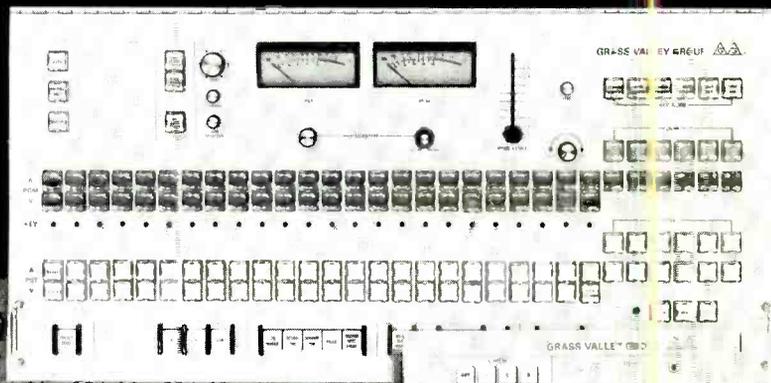

## THE GRASS VALLEY GROUP, INC.

P.O. BOX 1114 GRASS VALLEY CALIFORNIA 95945 USA • TEL: (916) 273-8421 TWX: 910-530-8280

A TEKTRONIX COMPANY

Circle 102 on Reader Service Card

Offices: WEST: 21243 Ventura Blvd Ste 206, Woodland Hills, CA 91364 (213) 999-2303 • SOUTHEAST: 1644 Tullie Cir NE, Atlanta, GA 30329 (404) 321-4338 • NORTH CENTRAL: 810 W Bristol St, Elkhart, IN 46514 (219) 264-0931 • NEW ENGLAND & MID ATLANTIC: Station Plaza East, Great Neck, NY 11021 (516) 487-1311 • NORTHWEST: Seminole South Office Building, Ste. 316, Fort Worth, TX 76115 (817) 921-9111 • MIDWEST: 3585 N Lexington Ave Ste 238, Arden Hills, MN 55112 (612) 433-3591

www.lamarc.com/radiohistory.com

# BROADCAST INDUSTRY NEWS

## Radio Sheds Commercial, Public Affairs Limits

The FCC has dropped the commercial time limits and minimums for nonentertainment programming for radio stations in a deregulatory move that has delighted broadcasters and disappointed public interest groups.

The Commission's ruling allows radio broadcasters to determine for themselves the appropriate amounts of commercials, news, and public affairs programming for their audiences. Replacing the nonentertainment minimum is a nonspecific standard requiring radio broadcasters to address themselves to important community issues, including controversial ones.

The NAB was quick to hail the "enlightened" move, calling it "a turning point in the history of broadcast regulation." Religious and public interest groups, which had opposed lifting the limits, were considerably less pleased. The Media Access Project's Andrew Jay Schwartzman called the ruling "a sad day for minorities, women, the poor, religious groups, and other working people who have relied on the FCC" to see that listeners' needs were met.

Stations' public files will have to include each year a list of issues of community importance they have addressed; the list will still be reviewed during license challenges.

## Domestic Satellites Get Big Lift From FCC

A massive action by the FCC at the close of last year has paved the way for

the launch of 20 new domestic satellites, with five more authorized to be constructed but not launched yet. The birds will replace existing satellites ready for retirement, expand the services of existing carriers, and start off new services. The new birds are all scheduled for launch between now and 1983 and should do much to relieve the current satellite squeeze.

The eight companies involved include: Hughes Communications, which will build three birds and launch two of them; Southern Pacific Communications Co., also building three and launching two; Comsat, authorized to launch its fourth Comstar satellite; AT&T, which will construct a three-satellite Telstar System to replace the Comstar birds when they expire (two of the birds are approved for launch); RCA Americom, which will construct six new Satcom satellites and launch four of them; Western Union, given the go-ahead for construction and launch of two additional Westar birds; Satellite Business Systems, which got approval to launch its second satellite; and GTE Satellite Corp., which will construct three satellites and launch two of them.

## Gannett Forms Satellite News Firm

Gannett Satellite Information Network has been formed by Gannett Co. to beam information to print and broadcast media outlets via satellite. The Rochester, N.Y.-based publishing giant said that the info—to include news, advertising, and entertainment—initially would be transmitted

from a transmitting station in Springfield, Va. The service has been titled "U.S.A. Today" and has leased time from the American Satellite Co.

Theoretically, an infinite number of stations and papers could be hooked into the net. Satellite subsidiary president Maurice Hickey said that several newspapers already have the small receiving dishes used for the Associated Press satellite net. Gannett owns seven TV stations and 12 radio stations in addition to its 81 newspapers.

## Cable Goes West: Western Cable Show

Over 200 exhibitors—selling programming and cable equipment of all descriptions—and 6000-plus attendees crowded the Disneyland Hotel in Anaheim, Calif. for the twelfth annual Western Cable Television Show and Convention, December 10 through 12. Due to record attendance, next year's show will be moved to larger quarters, conference officials said.

Program suppliers were very much in evidence and very much in competition, resorting to such tactics as heavy leafletting of seats at all the sessions (Private Screenings, purveying exploitation films) all the way up to a black-tie dinner on board the Queen Mary (CBS Cable). Other major suppliers and hopefuls regaled the conventioners with big name entertainment, including the likes of Dolly Parton and Red Skelton. Premiere, moving right along in the face of its still-unsettled Justice Department suit, announced its January schedule; Time-Mirror Satellite Programming Co. announced



Outgoing FCC commissioner  
Tyrone Brown

## Tyrone Brown Resigns; Hopes For Black Successor


Commissioner Tyrone Brown, the only black member of the FCC and just the second black commissioner in FCC history, has resigned his post effective January 31 to accept a position as general partner in Steptoe and Johnson, a Washington, D.C. law firm.

Brown's letter of resignation to President Carter stressed the importance of minority representation on the Commission, saying, "I hope your successor will recognize [this] as you did . . . Such an appointment is not merely a matter of "tokenism"; it reflects an understanding

that minority representation at the Commission level is the most effective way to assure that minority perspectives are considered. . ."

He praised FCC chairman Ferris who, Brown said, "has guided the FCC through one of its most dynamic and productive periods." Brown also noted that during his three "challenging and rewarding" years on the Commission, the body had become "the only independent regulatory agency to officially endorse and successfully implement a minority ownership program."

# *It makes our competitors nervous to discuss these standard ADM benefits*

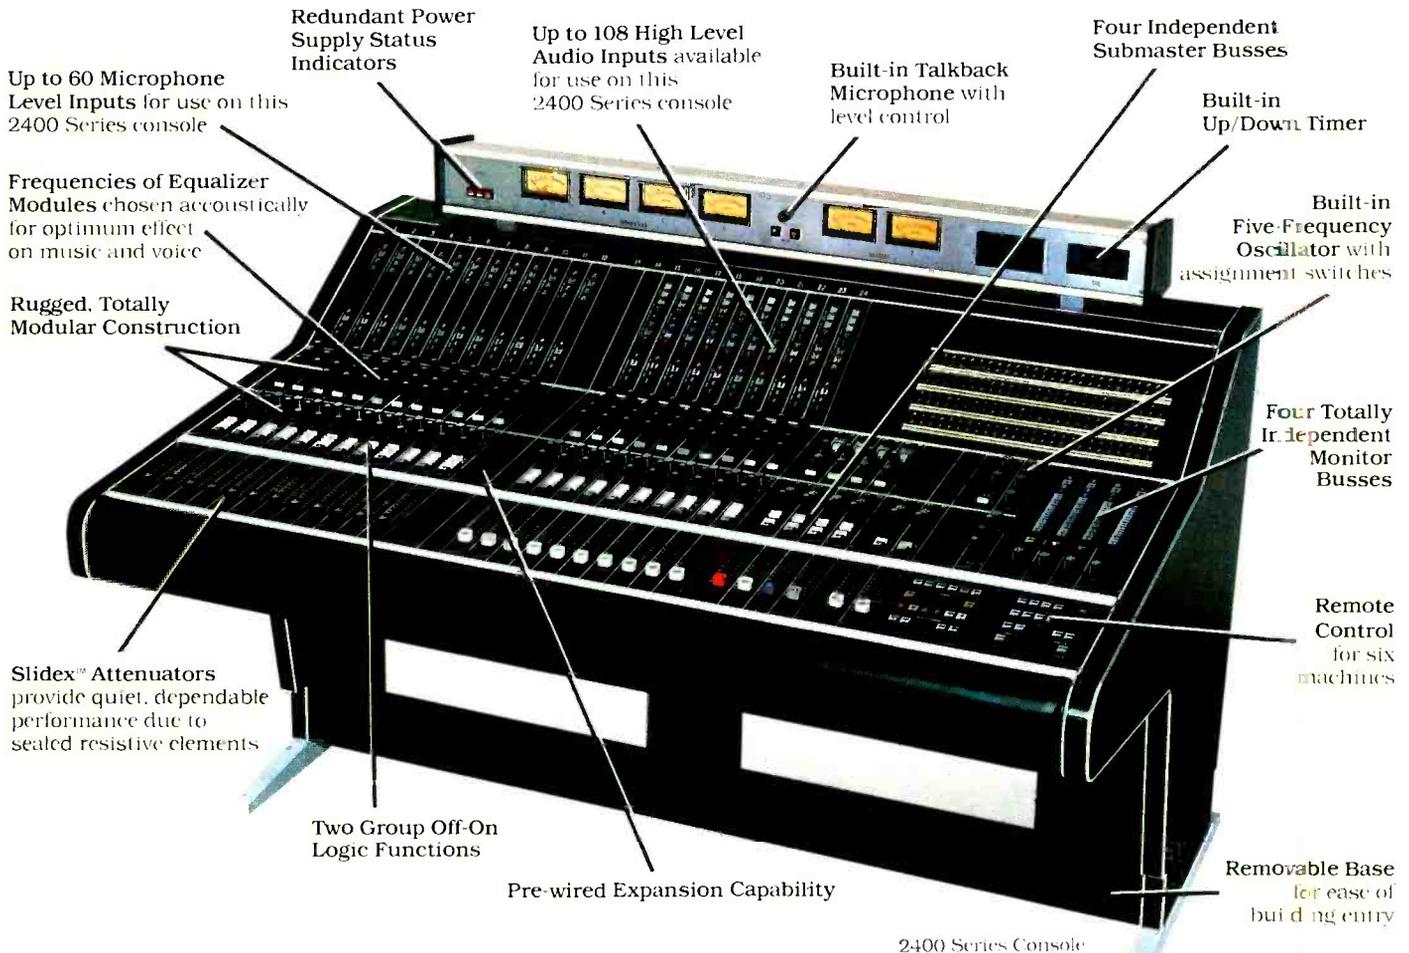

Talk to other console salesmen about any of these features and you'll get a lot of throat clearing and foot shuffling. Query our salesmen and you'll get a lot of facts about ADM features that help you do a better job and he'll tell you about our exclusive 5-year warranty. (Yes, we *have* to build them better, and we do!)

Learn more about our Series 3200, 2400, 1600 or 800 ADM Audio Consoles. Contact ADM Technology, Inc., 16005 Sturgeon, Roseville, Michigan 48066. Phone (313) 778-8400. TLX 23-1114. West Central Sales Representative, Gordon Peters, (817) 467-2990.

# ADM®

*The Audio Company*

## News

a cable home-shopping service, to begin by the middle of this year.

The hardware suppliers were there full force, including plenty of names well familiar to broadcasters—ADDA, Bogner Broadcast, Compact Video, Harris, Jerrold, Magnavox, Microwave Associates, Motorola, RCA Americom, Station Business Systems, and System Concepts, to name a few. Reflecting the importance of the satellite to the cable industry, the park-

ing lot of the hotel was filled with dishes from manufacturers such as Hughes, Scientific-Atlanta, Microdyne, and Gardiner.

### PBS Loses BBC Shows To New Cable Net

When new cable network RCTV goes into operation in January, 1982, its impact will be felt strongly at the Public Broadcasting Service. That is because RCTV, a division of Rockefeller Center Inc., has signed a 10-year exclusive contract with the British Broadcasting

Corporation for rights to BBC-produced programming.

The high-quality BBC shows, such as *Masterpiece Theater* and *The Ascent of Man*, have been a staple of the PBS offerings for several years, helping the public TV stations draw viewers and financial support. Under the RCTV-BBC agreement, RCTV will own the shows on an exclusive basis for at least one year, perhaps longer for the most popular shows. After that period the shows may be made available to public or commercial TV stations.

The new network, which has not signed up for satellite space, will also offer U.S.-made entertainment and children's programming. RCTV was introduced at the recent Western Cable Show (see story in this section).

### FCC Proposes Lifting Common Carrier Rules

Major deregulation of specialized common carriers, resale firms, and satellite carriers has been proposed by the FCC. The Commission based its proposal on a provision of the Communications Act that allows it to refrain from regulation of carriers with little or no market power.

Companies such as RCA Globcom, Western Union's satellite divisions, American Satellite, and Eastern Microwave could be among the beneficiaries of the deregulation plan, which defines market power as the ability to control prices and restrict output. The proposal specifically exempts AT&T, the independent telcos, and Western Union's telex and TWX services from deregulation, citing the large market power they hold. Competitive firms in the industry were termed "non-dominant" and therefore qualified for potential deregulation.

## News Briefs

FCC commissioners Robert E. Lee and Anne P. Jones were due to make recommendations to the Commission by the start of this month about the agency's need for office space. A decision on the **proposed move to an office tower in Rosslyn, Va.**, was delayed until the recommendations could be considered. . . . **Complaints and comments** received by the Broadcast Bureau in 1980 were down almost 15,000 from 1979, with 70,000 of the 94,500 classified as complaints. . . . NAB has asked the FCC for a **freeze on low power TV and TV translator applications** because of the huge volume of such filings; present processing procedures, NAB said, violate the Administrative Procedure Act. . . . Technical standards for **FM quad broadcasting** should be set by the FCC, not left to the

# Announcing Model 909

## 9" Color For ENG

- Rugged/Compact/Portable
- In-line Slotmask CRT
- AC/DC Operation
- Pulse Cross Display
- EXT/INT Sync
- A/B Input
- Blue Only Display
- Black Calibration
- R-Y, B-Y Outputs For Vector-Scope
- Color/Monochrome Selector
- Twin Units For Rack Mount




**SHINTRON**  
Worldwide

144 Rogers Street  
Cambridge, MA 02142 USA  
Phone (617) 491-8700  
Telex 921497

Circle 103 on Reader Service Card

VIDEOSCOPE

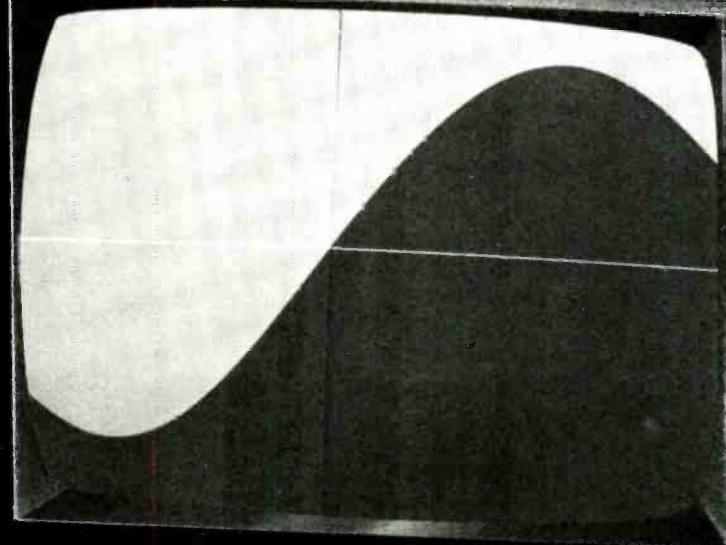

## Verify your RS-170A with a dynamic, easy to read video display that's light years ahead.

The new RS-170A Video Line Output specifications are designed to insure a consistent relationship between video burst and sync phase, particularly during tape record and playback.

The specifications are relatively easy to achieve; however certifying and timing the signals is a different story.

We at Lenco have taken a careful, thoughtful approach to the challenge. We have developed the Videoscope.

The Videoscope will display a full cycle of sub-carrier and will tell you when correct SC/H phase is (or isn't) on the mark.

In addition to certifying, you can phase compare sync and burst of two video signals. Now you have a truly usable system analysis device.

Another plus. The Videoscope can give equally accurate results in source-to-source timing in a Non "A" System.

And because it is viewed on a standard video monitor—any monitor—you can look at the Videoscope display and quickly relate it to what is actually happening in your system. No more looking at faint lines on scopes in dark corners. To certify your RS-170A, all you need is Videoscope. Anywhere in your plant. Light years ahead.

Want to know more about the Videoscope? Write on your letterhead for a complimentary copy of "An Accurate Method for Certifying Timing, and Analysis of RS-170A"



**THE  
PROFESSIONAL'S  
CHOICE**



Lenco, Inc., Electronics Division  
300 N. Maryland St., Jackson, MO 63755  
(314) 243-3147

Circle 104 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## News Briefs

marketplace, NAB told the Commission . . . The association has filed its opposition with the FCC to Turner Broadcasting System's request for repeal of the mandatory cable carriage rules.

Marvin Josephson Associates has agreed to purchase the assets of **WNOR-AM and FM**, Norfolk, Va., for a reported \$2,600,000 . . . Gulf Broadcast Group Inc. of St. Petersburg, Fla., has completed the resale of

four of the nine radio stations it purchased from the San Juan Racing Assn. last fall. Infinity Broadcasting Corp. bought **WKTU** and **WJIT**, New York, and **WYSP**, Philadelphia, for \$32 million; District Group Communications Inc. bought **WUST**, Washington, D.C., for \$1.5 million . . . Bible Broadcasting Network has agreed to purchase its fifth radio station, **WXNC-FM** in North Carolina.

The U.S. Environmental Protection Agency has awarded a \$230,000 contract to the University of Tulsa, Okla., to study the effects of microwave radi-

ation on unborn mammals. (For a discussion of concerns raised by broadcast use of microwave, see *BM/E's* August, 1979 article, "The Deadly Spectrum?") . . . National Captioning Institute close-captioned this year's Sugar Bowl game for ABC-TV, marking the **first captioning of a live sports event**. NCI has also begun captioning PBS's successful *Sesame Street* children's series.

The audio products group of **Ampex Corp.**'s Audio-Video Systems Div. has moved its operations to the company's Cupertino, Calif. facility . . . Time base corrector manufacturer **Edutron Inc.** has moved to new corporate headquarters at 6649 Peachtree Industrial Blvd., Suite A, Norcross, Ga. 30092, (404) 447-4422 . . . **U.S. JVC Corp.** has officially opened its new headquarters at 41 Slater Dr., Elmwood Park, N.J.


Robert D. Lloyd, formerly of Gold Key Entertainment, has formed **Lloyd Enterprises** to provide program distribution to commercial, public, and pay TV stations. The new firm is located at 15910 Ventura Blvd., Suite 800, Encino, Calif. 91436, (213) 788-4880 . . . **Centel**, described as New England's largest one- and two-inch video post-production facility, has opened in Boston. The complex was designed by New York architect John Storyk and features a **CMX** editing suite.

**A.F. Associates** of Northvale, N.J., has organized a direct mail department to sell spare parts, modules, and components for the Ampex VR 1200 and VR 2000. A copy of the company's *Parts Bulletin* may be obtained by calling (201) 767-1000 . . . **Moseley Associates** of Goleta, Calif., has named two exclusive Canadian distributors. They are Nortec West Ltd. of Vancouver, B.C., and Applied Electronics of Toronto, Ont.

Transportable earth stations were a transmission method of choice for stations covering last season's big football games. Four Oklahoma TV stations—**KOCO**, **KTVY**, and **KWTV** of Oklahoma City and **KTUL**, Tulsa—shared a **Wold Communications** transportable uplink for their coverage of the Orange Bowl in Miami, while the Cable News Network beamed its Super Bowl coverage out of New Orleans via **Satellite Syndicated Systems'** transportable earth station. SSS recently purchased a Torus 4.5-meter multiple beam earth station antenna from **Radiation Systems, Inc.**—the first sale of the unit.

SUN Television's new \$3 million 40-foot remote video production vehicle, built by **Compact Video Systems**, has been outfitted with **Ikegami** HK 357A and HL-79 cameras, a **Quantel DPE 5000 Plus** effects unit, and an **ADDA** frame store/synchronizer.

## Go anywhere super-rugged SMPTE/EBU Edit Code Generator and Companion Reader that will give you an instant shot list.

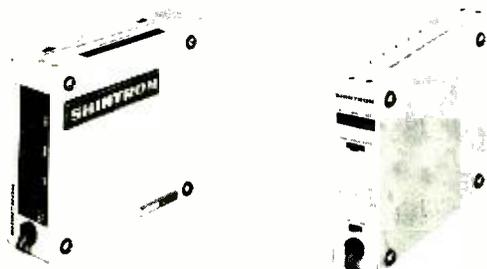

### The only portable SMPTE/EBU Edit Code Generators.

- Goes anywhere with your ENG crew. 2.0mA max. battery drain.
- Very light and rugged. It attaches to your VTR and produces accurate edit code as you shoot an important scene. More than 500 units in use worldwide.
- Model 640 for SMPTE, Model 641 for both SMPTE/EBU with LCD constant display and user code capability.



### Model 644 Edit Code Reader plus off-line editing printer.

When Shintron builds a new product, we think of our customers' convenience first. Good Edit Code Readers are a dime a dozen today, but which one can generate an instant shot list? The only one is Model 644 Edit Code Reader/Raster Display and Shot List printer.



# SHINTRON

Worldwide

Cambridge, MA 02142 USA  
Telephone (617) 491-8700  
Telex 921497

Circle 105 on Reader Service Card



Picture shows Model 5315/32 TV Audio Console customized for WRC-TV, Washington, D.C.

Simplicity, reliability and high performance are the parameters needed by TV broadcasters in the 1980's.

And Neve delivers just *that* in its wide range of purpose designed TV audio consoles; consoles surprisingly price competitive and often available on short delivery. Our 542 series spans 6 to 16 in, ideally suited for video production facilities and TV audio sweetening. The 5315 and 5316 consoles are available in sizes from 12 to 36 in with 4 or 8 submasters for TV sound production and on-air applications. Please write or call for our comprehensive TV audio console information package, so you can put Neve in your budget now. You'll be joining the Neve world of excellence!

# Audio for TV Stations!

---

 **Neve**

**Rupert Neve Incorporated** Berkshire Industrial Park, Bethel, Connecticut 06801 Tel: (203)744-6230 Telex: 969638

**Rupert Neve Incorporated** 7533 Sunset Blvd., Hollywood, California 90046 Tel: (213)874-8124 Telex: 194942

**Rupert Neve Incorporated** P.O. Box 120907, Nashville, Tennessee 37212 Tel: (615)385-2090

**Rupert Neve of Canada, Ltd.** 2721 Rena Road, Malton, Ontario L4T 3K1, Canada Tel: (416)677-6611 Telex: 983502

**Neve Electronics International, Ltd.** Cambridge House, Melbourn, Royston, Hertfordshire, SG8 6AU England Tel: (0763)60776

**Rupert Neve GmbH** 6100 Darmstadt Bismarckstrasse 114, West Germany Tel: (06151)81764

Circle 106 on Reader Service Card



## The BCC-20 Digicam Edge. An EFP Camera that's 100% Ampex.

The best of Ampex technology has been designed into our computer controlled EFP camera. Built by Ampex in our new California facilities, the Digicam was designed to produce the highest quality picture both on location and in the studio.

### A Computer in a Portable Head.

The BCC-20 Digicam's computer-in-the-head technology combines a microprocessor and digital memory with a powerful software program to give you full-time digital control of the camera.

Even with the power turned off, the Digicam's memory-in-the-head stores the operating parameters.

### New to Camera Technology.

Unique with Digicam is Spatial Error Correction, which can achieve 0.05% registration in any of 182 zones of the picture. Using the Spatial Error Correction Cursor System, you can zero-in on any area of the picture and correct an error in seconds.

The Spatial Error Correction System allows the operator to easily overcome difficult distortions such as "bowing", "S" distortion and off-axis corner registration errors and quickly achieve perfect registration.

### The MSP. Total Control Manually or Automatically.


The MSP (Master Set-Up Panel) is the control terminal for the Digicam System. It controls manual set-up of the Digicam, or automatic set-up when the ASU (Automatic Set-Up Unit) is used.

With the MSP and the ASU in use you can set-up as many as 8 cameras in far less time and with better results than a single, conventional camera.


In the self-contained mode, the Digicam head memory permits the MSP to be disconnected for true portable operation. And yet the operator can still use thumbwheel selector switches inside the camera head to make any operational last minute adjustments.

You'll find the Digicam by Ampex to be the most advanced portable camera available today. Call your Ampex representative and tell him you're ready for the Digicam edge!


**Get the Ampex Edge.**

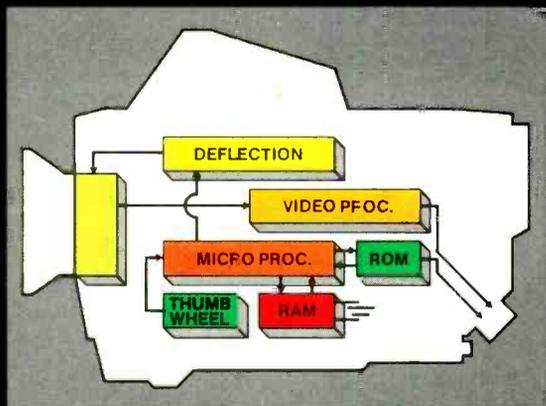

COMPUTER IN THE HEAD

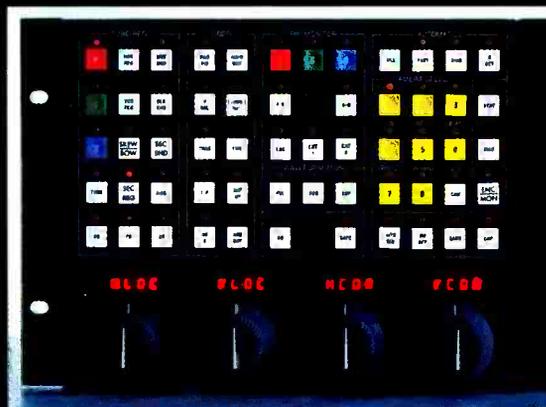

MASTER SET-UP PANEL

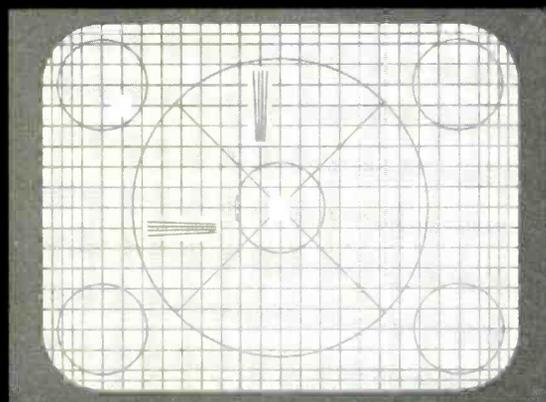

PERFECT REGISTRATION USING SPATIAL ERROR CORRECTION



Ampex Corporation, Audio-Video Systems Division  
401 Broadway, Redwood City, CA 94063 415/367-2011

Circle 107 on Reader Service Card

# It's The Best Selling Professional Tape Machine In The World.

**The MX-5050B**



Because of quality that delivers unmatched reliability. Because Otari designed this machine to go to work—overtime. Because it offers the performance and features of machines which cost more than twice as much. Because of ingenious production technology and intelligent design decisions from the manufacturer of the most comprehensive line of professional tape machines in the world.

All this comes for less than \$2500.

The Otari 5050B can ease your production burdens while assuring your banker its return on investment. You can also avoid the hassles of a used or rebuilt machine with The New Workhorse.

It's a tough act to follow—but we're doing it. Keep in touch and check out the 5050B at your nearest dealer.

Dollars for dB's, it's the best tape recorder made.

**The New Workhorse**

**OTARI**®

Otari Corporation  
1559 Industrial Road  
San Carlos, CA 94070  
(415) 592-8311

In Canada:  
BSR (Canada, LTD.)  
P.O. Box 7003  
Station B  
Rexdale, Ontario M9V 4B3

Circle 108 on Reader Service Card

# RADIO

PROGRAMMING & PRODUCTION FOR PROFIT

## The Program Flood Is Rising

IT APPEARS CLEAR that a main feature of the radio landscape in the near future, along with rising competition, will be a tremendous increase in the number and variety of programs available to stations around the country. The satellites are a main cause, encouraging the development of a whole new software industry for radio, with old-line networks joining many new organizations as the creators. But program activities outside satellite distribution are being stimulated, too. The program market enlargement effected by the satellites is encouraging other groups to plunge in with new kinds of programming, and many are selling well.

Competition is applying its own spur to program creation; stations even in small markets now find they need programs with more "finish" than they can afford to supply themselves. The syndicator is riding the wave.

In a later issue *BM/E* hopes to bring together a fairly comprehensive account of the programming scene, with a directory of sources. In the space available here we note, as we have in earlier issues, a few of the short-program syndications we have learned about lately.

### "Country" personalized

Louisville Productions is a division of WHAS, Inc., operator of the vet-

eran radio and television stations in that city. The firm has been successful in production of film and videotape programs and radio and TV commercials. Its first venture into radio syndication is *Inside Country*, 52 weekly programs each consisting of five-chapter interviews interspersed with music. Each weekly series presents one country musician, highlighting his or her life history, comments, attitudes to music, etc. The interview segments are 3½ minutes long with room for commercial breaks. This allows for easy rotation with the music, fitting into the station's programming in a natural way. Louisville Productions recommends that each interview segment be used four times a day, but stations can do it less or more as their formats dictate.

"The country music audience identifies with the personality of the artist as much as with the music," Bob Gordon, president of Louisville Productions, said. "We try to provide a feeling of intimacy with the artist . . . and this requires the skill of an interviewer with insight, sensitivity, and perspective."

The interviews are put together and conducted by Alanna Nash, biographer of Dolly Parton and with a large volume of other writing to her credit in many media on the subject of popular culture, especially country music. She has also created a number of radio specials for various organizations, in-



One of the groups covered in *Inside Country*, a syndicated country music interview series from Louisville Productions, is the Charlie Daniels Band, shown in concert on January 8, 1981

## Comrex Makes Low Frequency Extenders

An audio must. Broadcast quality on a standard dial telephone line. For networking, "first & last mile" satellite delivery, news, sports, weather, farm, stock market, religious or special interest programs.

## Cue Systems

The ideal way to direct ENG field personnel. A 1 watt IFB system that allows ENG crew to hear both program and instructions in one pocket receiver. ALSO - TV Aural Monitors. Rugged pocket receivers fix-tuned to your TV channel for live off-air cueing. 50-550 MHz.

## Wireless Microphones

A new line of ENG gear.

## Talk Show System

A studio/telephone interface system that permits on-air conferencing of two incoming telephone callers with studio host. The only complete, ready-to-go talk show system available.

For further information, call or write:

# COMREX

18 Years in Broadcasting

P.O. Box 269  
60 Union Avenue  
Sudbury, Massachusetts 01776  
TEL: (617)443-8811  
TWX: 710 347-1049

Circle 109 on Reader Service Card

## Radio Programming

cluding Creative Radio Shows and National Public Radio.

The list of names for the first year of *Inside Country* includes just about every country artist with an impact, past and present. Nash's expertise is evident in the scope of her choices.

The subscribing station has the right to repeat the programs at will during the one-year period. Cost is based on market size.

The fact that a successful producer of video programs is moving into radio syndication is more evidence of the radio programming rise. As of fall, 1980, 55 stations were taking *Inside Country*, a good start for the program.

The programs are distributed on discs, each holding the segments for two weeks of the program. Bob Gordon told *BM/E* that discs were being used in part because of the hope that several hundred stations would eventually take the program.

Radio programmers who want more

information on *Inside Country* should call Gordon at (502) 582-7555.

### Interviews from Israel

A series of 15-minute weekly interview programs, *Dateline Israel*, is distributed free to radio stations by the Anti-Defamation League of B'Nai B'rith. The series includes such material as a discussion by Israel's president, Yitzhak Navon, of the contributions through history of the Jewish people to the ethics and principles of Western civilization; energy alternatives being developed by Israel, described by Yehuda Bronicki, director of the country's energy program; a report from Israel's Arabs by Ibrahim Shbat, a distinguished poet and novelist; a discussion of solutions for Israel's inflation rate by Dr. Haim Ben-Shachar, president of Tel Aviv University; an analysis of Israeli entertainment preferences and the role of entertainment in times of crisis by Dan Almagor, playwright and television producer.

Interested radio programmers should address the Anti-Defamation League at 823 United Nations Plaza, New York, N.Y. 10017, or any of the League's regional offices.

### Special to the 45-and-over

We are there now, or will be sometime later. Thus *New Age Radio*, a series directed to the problems of aging, will continually gain graduates to its intended audience of "older" Americans. The series is produced by Jameson Broadcast, Inc., of Washington and Columbus, Ohio. The plan is to produce the series on a state-by-state basis, with a sponsoring organization in each state. The show will have a retired couple, Ed and Irene Martin, as hosts who will answer questions from listeners and discuss across a table all the topics of main interest to the 45-and-over: finances, health, leisure, legal matters, housing, etc.

By basing the series in each state, Jameson intends to make specific reference to services available in that state. This has worked out well in the first aired series, which is sponsored by the Ohio Commission on Aging and has been carried by more than 100 Ohio radio stations beginning in June of 1980.

An ever-present hazard of old age is aloneness, and Jameson is aiming to provide an active two-way communications line with listeners so their individual concerns can get quick attention with essential information and support supplied. Each segment of the program is three minutes long, with the hosts handling the material in a personal, informal manner.

For info: Margi Hess, Jameson Broadcast, (614) 476-4424. **BM/E**

# Beaucart 100


Now get the best from Beaucart—the Type 100. The most advanced re-producer Beaucart has ever made, the Type 100 incorporates all the features necessary for reliable performance and exceptional sound reproduction. Look at these performance features:

- Modular design and motherboard construction to insure reliability
- Dual redundant phase lock loop circuitry to eliminate false cueing
- State-of-the-art amplifier circuitry to yield superior frequency response with exceptionally low distortion.

If you are looking for value and performance, the Type 100 is the answer. Write for our brochure detailing this advancement for the broadcast professional.

**UMC** Electronics Co.  
Broadcast Products Division

460 Sackett Point Road  
North Haven, CT 06473  
(203) 288-7731 (In CT) Telex 96-3510  
(800) 243-6178 (Outside CT, toll-free)

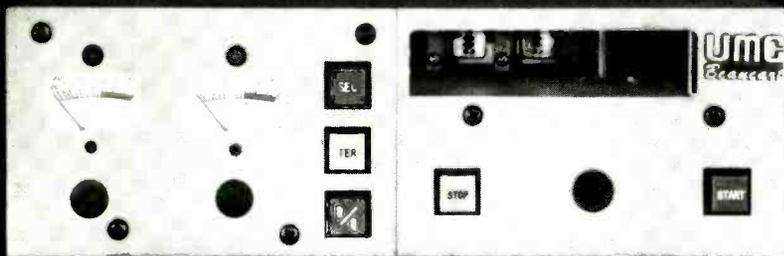

Circle 110 on Reader Service Card

## Program Marketplace

### Syndicators For Radio

**Cavox Stereo Productions**  
502 South Isis Avenue  
Inglewood, Calif. 90301  
Tel. (213) 776-6933

RADIO IN THE SMALL and medium markets reflects the trends in broadcasting more intensely, in some respects, than do radio operations in the big cities. For example, competition, more and more the dominating condition of the radio broadcaster, can be a life and death matter with only three stations in the market—if the city has, say, just 50,000 citizens. A radio station cannot survive with 10 to 15 percent of the active listeners in a city that size.

Lee Tate, founder and president of Cavox, is acquainted in detail with the survival problems of radio broadcasters in the small and medium markets. As described in this column in December, 1977, the firm has eight main formats, covering nearly all branches of popular music. Further, each format is divided into blocks which can be reassembled in other orders, menu-style, for the particular formulation the management believes is best for its market.

This implies close consultation on a continuing basis between Cavox and the subscriber. Lee Tate, in a recent interview, told *BM/E* that the intensifying competition in radio has, in the last few years, made subscriber consultation more and more a continuing fact of life for his operations. Changes come faster in radio markets than they used to; station managements more quickly jump to new forms of programming when the competition in the market poses a new threat.

Thus more frequently than in the past a subscriber, or a prospective subscriber, issues a call for help, even when the emergency or the threat is a minor one. Lee Tate, with more than two decades of experience, is a "programming doctor" with tested expertise. His long concentration on stations in the small and medium markets has paid off with a steadily growing subscriber list. 1980 was up again as all recent years have been.

His renewal rate is very high; he told *BM/E* that more than 80 percent of the stations on the list at the time of the December, 1977 column are still there.

His comments on trends in radio's use of popular music are quite a bit like those of other syndicators recently interviewed. With most of the Cavox subscribers in small and medium mar-

kets, the demographic appeal in general must cover the whole age span without the concentration on the teen bracket that some big-city stations are able to afford. This mostly grownup audience is showing increasing aversion to anything like hard rock, and is turning to a mellower sound. Cavox serves this taste with various forms of an Adult Contemporary format. Tate says it might be called MOR, but not the MOR of five and 10 years ago: that would have a nostalgic sound now. This new formulation is built on cur-

rent music and has a thoroughly up-to-date sound.

Also still very successful for Cavox is the Beautiful Music format, which is stronger than ever. But Cavox has the problem that all syndicators of Beautiful Music have; finding Beautiful Music. The format was dropped by the American record industry, and the syndicators must go to other countries to find it. Lee Tate goes to England for some of his recordings. He has worked with Jim Schlichting of Starborne Productions (*BM/E*, December, 1980) and



# editors' choice.

**COMMANDER II** — the market's newest video tape editing system offers some significant differences.

United Media has taken a totally new look at the desires and requirements of the industry in developing Commander II. The results — a technologically superior editing system at a significantly lower price.

*Like \$40,000 for a complete 4 VTR system — any combination of playback and record for multiple format masters (expandable to 3 more VTR's plus switcher).*

*Like automatic switcher control for double re-entry with 3 independent M/E amplifiers.*

*Like video levels variable in 10% increments with mix rates from 1 to 999 frames.*

*Like automatic cut listing with a single keystroke — and automatic list management for shortening, lengthening or rearranging scenes.*

**Now editors can have a real choice. judge for yourself — call Bob Ricci at 714/630-8020 today.**

**United Media**  
4075 Leaverlon Court, Anaheim, CA 92807

Circle 111 on Reader Service Card

# Electro-Voice's Greg Silsby talks about the Sentry 100 studio monitor



Production Studio, WRBB-FM, South Bend, Indiana.

In all the years I spent in broadcast and related studio production work, my greatest frustration was the fact that no manufacturer of loudspeaker systems seemed to know or care enough about the real needs of broadcasters to design a sensible monitor speaker system that was also sensibly priced.

Moving to the other side of the console presented a unique opportunity to change that and E-V was more than willing to listen. When I first described to Electro-Voice engineers what I knew the Sentry 100 had to be, I felt like the proverbial "kid in a candy store." I told them that size was critical. Because working space in the broadcast environment is often limited, the Sentry 100 had to fit in a standard 19" rack, and it had to fit *from the front, not the back*. However, the mounting hardware had to be a separate item so that broadcasters who don't want to rack mount it won't have to pay for the mounting. The Sentry 100 also had to be very efficient as well as very accurate. It had to be designed so it could be driven to sound pressure levels a rock 'n roll D.J. could be happy with by the low output available from a console's internal monitor amplifier.

In the next breath I told them the Sentry 100 had to have a tweeter that wouldn't go up in smoke the first time someone accidentally shifted into fast forward with the tape heads engaged and the monitor amp on. This meant high-frequency power handling capability on the order of five

times that of conventional high frequency drivers.

Not only did it have to have a 3-dB-down point of 45 Hz, but the Sentry 100's response had to extend to 18,000 Hz with no more than a 3-dB variation.

And, since it's just not practical in the real world for the engineer to be directly on-axis of the tweeter, the Sentry 100 must have a uniform polar response. The engineer has to be able to hear exactly the same sound 30° off-axis as he does directly in front of the system.

Since I still had the floor, I decided to go all out and cover the nuisance items and other minor requirements that, when added together, amounted to a major improvement in functional monitor design. I wanted the Sentry 100 equipped with a high-frequency control that offered boost as well as cut, and it had to be mounted on the front of the loudspeaker where it not only could be seen but was accessible with the grille on or off.

I also didn't feel broadcasters should have to pay for form at the expense of function, so the walnut hi-fi cabinet was out. The Sentry 100 had to be attractive, but another furniture-styled cabinet with a fancy polyester or die-cut foam grille wasn't the answer to the broadcast industry's real needs.

And for a close I told E-V's engineers that a studio had to be able to purchase the Sentry 100 for essentially the same money as the current best-selling monitor system.

That was well over a year ago. Since that time I've spent many months listening critically to a parade of darn good prototypes, shaking my head and watching

some of the world's best speaker engineers disappear back into the lab to tweak and tune. And, I spent a lot of time on airplanes heading for places like Los Angeles, Grand Rapids, Charlotte and New York City with black boxes under my arm testing our designs on the ears of broadcast engineers.

The year was both frustrating yet enjoyable, not just for me but for Ray Newman and the other E-V engineers who were working on this project. At this year's NAB show it all turned out to be worth it. The Sentry 100's official rollout was universally accepted, and the pair of Sentry 100's at the Electro-Voice booth was complemented by another 20 Sentry 100's used by other manufacturers exhibiting their own products at the show.

What it all boiled down to when I first started the project was that I knew that the Sentry 100's most important characteristic had to be *sonic integrity*. I knew that if I wasn't happy, you wouldn't be happy. I'm happy.

Market Development Manager,  
Professional Markets



**EV** **Electro-Voice**  
a **gulton** company

600 Cecil Street, Buchanan, Michigan 49107

In Canada

Electro-Voice, Div of Gulton Industries (Canada) Ltd.,  
345 Herbert St., Gananoque, Ontario K7G 2V1

Circle 112 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## Program Marketplace

constantly searches in other domestic and foreign record supply sources for what he needs.

Cavox has recently begun to open a new market for the music, which is also a very old market for Cavox. The name of the firm itself signifies "Cable Voice" because one main objective at its founding in 1971 was to furnish cable systems with background music for their "character generator" channels—the weather, local notices, etc.

At that time the "cavox" function did not flourish largely because cable systems did not find it cost-effective to market the service to subscribers. Cavox turned major attention to broadcast syndication and built its success there. The cable industry went into its doldrums of the middle 70s.

In the last two years, though, with cable expanding tremendously and becoming a much stronger market for services under the influence of the satellites and of sophisticated pay-cable operations, the opportunities have spiraled back to the original Cavox plan. Today the cable operator can make money with salespeople actively pushing the various pay-cable services, and music in some form is one of the inducements to subscription.

This may take the form of music in back of the "local announcement" channel. Close to 100 cable systems now use Cavox music this way, which is as Lee Tate originally envisioned the service.

Also building strongly are sales to the cable subscriber of "pure" music channels. The subscriber gets one or two channels of *commercial-free stereo music* of top quality "split" from the TV cable into his FM receiver. The cable operator gets a moderate extra fee for this, and it is efficient for him to sell it along with HBO, Showtime, or other pay-cable entertainment services. More than 25 cable systems have adopted the plan and the subscriber welcome has made them enthusiastic about it.


To equip the service Cavox sets up a tape playback system of top broadcast quality at the cable operator's main studios. The tapes then go out on a regular schedule, as they do for a broadcast station. Choice of material is governed by much the same considerations as those that apply to broadcast music.

Cavox is well-positioned for setting up the equipment because it has a sister company, Tapeathon, which has a large business in this country and abroad in the supply of equipment and programming for background music. Lee Tate had a valid idea. He was just a little early. **BM/E**

## FOR BROADCAST AUDIO MEASUREMENTS, if you compare features . . .

	Hewlett Packard 339A	Sound Technology 1710A	Potomac Instruments AT-51
<b>AUDIO GENERATOR</b>	Combined With Analyzer	Combined With Analyzer	Separate Unit
Intermodulation test signal	No	Option	Yes
Wow & Flutter test signal	No	No	Yes
Simultaneous L&R Outputs	No	No	Yes
600 ohms and 150 ohms Source	No	Yes	Yes
Stereo Matrix Switch (L,R, L+R, L-R)	No	No	Yes
Switch to remove signal and terminate line for S+N/N	No	Yes	Yes
10 dB, 1.0 dB, 0.1 dB Step Attenuators	No	Yes	Yes
<b>AUDIO ANALYZER</b>	Combined with Generator	Combined with Generator	Separate Unit
Harmonic Distortion Mode	Yes	Yes	Yes
Automatic Nulling	Yes	Yes	Yes
Automatic Set Level	Yes*	Option*	Yes
Intermodulation Distortion Mode	No	Option	Yes
AC Voltmeter Mode	Yes	Yes	Yes
Stereo Phase Meter Mode	No	No	Yes
L/R Amplitude Ratio Mode	No	No	Yes
Wow & Flutter Meter Mode	No	No	Yes

\* Limited to 10 dB capture range.

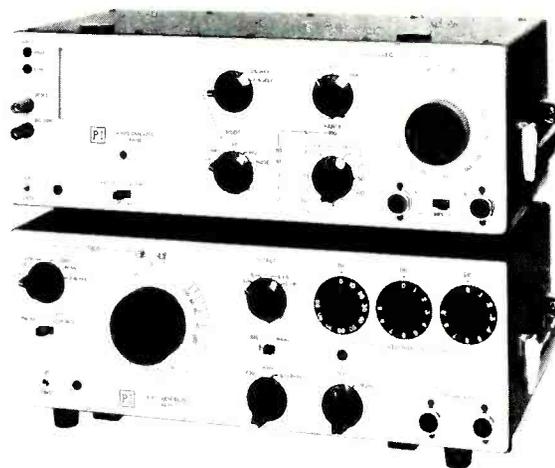

AT-51  
AUDIO TEST  
SYSTEM

. . . there is only  
**one logical choice!**

# POTOMAC INSTRUMENTS

932 PHILADELPHIA AVE.  
SILVER SPRING, MD 20910  
(301) 589-2662

Circle 113 on Reader Service Card

BM/E FEBRUARY 1981 21



## Introducing the only $\frac{3}{4}$ " time code editing system that performs 20 automatic edits from multiple sources. The Panasonic 700 B-2 Series Time Code Editing System.

**700  
B-2  
SERIES**

Now Panasonic adds a new dimension to the speed and accuracy of time code editing with our new 700 B-2 Series Time Code Editing System. The AU-700 editing recorder, the AU-A70 programmable editing controller, and the AU-J10 multiple source adapter. Together they let you do what other time code editing systems don't: Perform up to 20 automatic, multiple-source insert and assembly edits. And the 700 B-2 Series is packed

with outstanding performance features.

### The precision of direct drive.



Check out the excellent stability and precision of the AU-700's direct-drive video head cylinder and capstan servo motor. The superb performance and durability of our crystal-oriented HPF™ heads. All combine to produce an outstanding picture with horizontal resolution of 260 lines color, 330 lines

monochrome and S/N ratio of 46 dB color, 50 dB monochrome. You'll also get an edit with less video noise because video head switching has been moved to the vertical interval so it never shows up in the picture. At the same time, we incorporated DUB IN and DUB OUT connectors with separate Y/C signals and a flying erase head. And to keep that good-looking picture looking good, all circuitry is mounted in a durable annealed aluminum die-cast chassis.

### The speed of microprocessors.




Another touch of ingenuity is the AU-700's microprocessor controls. Designed to work perfectly with the AU-A70 editing controller, they give you the speed, accuracy and versatility of full-logic, mode-to-mode switching. The AU-700 will accept SMPTE time code on a separate track or on audio track one as well as standard CTL pulses. And its electronic



Shown from left AU-700 editing recorder, AU-A70 programmable editing controller.

digital tape counter displays LED readouts of CTL pulses in minutes and seconds—even in fast forward and rewind.

#### Multiple source versatility.




With our AU-A70 editing controller not only can you generate and read time code pulses, microprocessors let it perform up to 20 time code edits automatically. Add an AU-J10 multiple source adapter and it will accept inputs

from two source decks and one live line plus perform A/B rolls. Microprocessors also let you automatically go to specific tape locations. You can also search both ways at speeds of 1/20X, 1/5X, 1X, 2X, 5X plus pause with picture. Other features include program check, program exchange, insert programming and overflow indication. For editing convenience, separate address time and lap time indicators are included. The AU-A70's error codes pinpoint any procedural

errors to avoid incorrectly programmed edits. The AU-A70 can also be used with any Panasonic solenoid-operated 3/4" and 1/2" VHS™ decks. For worldwide versatility, there is a built-in voltage selector that is compatible with 100V / 120V / 220V / 240V AC, at either 60 Hz or 50 Hz.

#### Total service capability.



When it comes to servicing and maintaining the 700 B-2 Series, Panasonic backs you with a full net-

work of B-2 dealers, equipped with total service capability. Each has the parts and technical expertise that professionals require. For further information, call your nearest Panasonic office: Northeast—(201) 348-7620 Southeast—(404) 923-9700 Midwest—(312) 364-7936 Southwest—(214) 258-6400 West Coast—(213) 655-1111 The new 700 B-2 Series Time Code Editing System. Only from Panasonic.

**Panasonic**  
VIDEO SYSTEMS DIVISION


Circle 114 on Reader Service Card

www.americanradiohistory.com



**American  
Data's  
“ACTS”**

**Automated Control  
Television System  
for Production  
Switchers, the ACT  
that is hard to follow.**

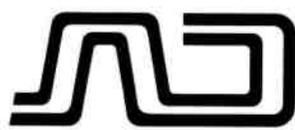 **American Data**

401 Wynn Drive • Research Park • Huntsville, Alabama 35805  
(205) 837-5180 • TWX 810-726-2125

A North American Philips Company

Circle 115 on Reader Service Card

# TELEVISION

PROGRAMMING & PRODUCTION FOR PROFIT

## RTNDA: Technology Versus Journalism

THE RTNDA'S ANNUAL CONFERENCE is starting to rival NAB and SMPTE for introduction of new equipment. That may be a little overstated, but it is clear that companies are fully aware that the biggest single purchaser of technical equipment, outside the chief engineer, is the news director.

The exhibit area at the 35th International Conference of RTNDA was the largest in the organization's history. More importantly, the size of the hall at the Diplomat Hotel in Hollywood, Fla., was the sole limiting factor. RTNDA officials had a long line of exhibitors waiting in the wings. About a week before the conference opened one of the exhibitors dropped out. Even with that short a notice, exhibit chairman Eddie Barker had no trouble finding someone to use the available space. Most of the attention in the exhibit area focused on weather graphics, news computers, and helicopter microwave gear.

The panel discussions dealt with basic journalistic concerns (such as freedom of information, investigative reporting, and writing) and improving management skills. There were also two sessions that allowed outsiders a chance to express their dissatisfaction with broadcast journalism.

There was an unofficial theme at this year's convention which dealt with whether technology has gotten out of hand in local television newsrooms. The public expression of the controversy came in several speeches and some of the formal sessions. The open-

ing salvo was fired by Reuven Frank of NBC News, who said, "I believe we were better off when technology was not so advanced"—his point being that the use of the technology has been to bring more of the same kind of information available in other media only faster. His contention is that the visual aspect of the medium has not been exploited to its full potential. Frank thinks that television news has become so wordy that it is more to be listened to than watched. And because there is a dependence on stories that aren't inherently visual, there is an overdependence on "devices that give forth numbers and letters and split-screens and zooms and star bursts and insets and flipovers."

Dan Rather of CBS News was next to observe that the technology was like the tail wagging the dog. "We're on the edge—some of us already are over the edge—of becoming so enthralled by the machinery that we forget about some of the elements of a newscast that only gifted people can provide. I wonder if we're not becoming the slaves of these advances, not their masters." Rather then differed with Frank in saying that broadcasters were becoming overly dependent on pictures and forgetting about words. He lamented that he saw little evidence that television was nurturing writers.

A final public shot was fired by Pauline Frederick of National Public Radio, who was given the coveted Paul White Memorial Award for her contribution to international reporting.

"The technology," Frederick contended, "...has given our profession marvelous tools with which to work. But the question that should forever confront us is whether in our eagerness to use these instruments, the import of the message may become confused with the messenger who could be perceived as trying to make and shape the news." Frederick went on to say that reporters should stop practicing "What if...? journalism" and just report what happened.

### Attack on integrity?

There were no formal answers given to the public pronouncements but privately many news directors held forth on what they considered an attack on their integrity and professionalism. "The network people," said one news director, "are always about two years behind the trends in local news." He said that there was a time when the technology may have been misused "because we had it and not because we knew what to do with it."

He and a lot of his colleagues interviewed by *BM/E* said that the use of the new technical equipment is back in balance. They contend that the dog is firmly in control of the wagging tail. A news director from a medium market in the midwest said, "I've got a helicopter, microwave vans, the latest cameras, and color radar. But I've also got an investigative unit, three more reporters, and two field producers. I now feel like I've got the tools to do what I'm supposed to be doing—news."

Bill Taylor, senior partner in the consulting firm The Media Associates, thinks that there is some validity to both sides of the argument but believes that there is a tendency by network pundits and others to "underestimate the intelligence of the public. People watch news for news...not for helicopters."


Dave Emery, news director at WMAR-TV, Baltimore, summarized things this way: "If we're such slaves to technology, why are the workshops on every subject but technology?"

Two of the first workshops held (and well attended) were Ed Bliss's lectures on writing for radio and TV. Bliss's lectures have become somewhat of an institution at RTNDA conventions, but he claims that this is the last year he will address the group. Many say they will miss him if that is true. "He's an analytical man," says Mike Beecher, news director at KTIV-TV, Sioux City, Iowa, "in an industry that needs to be more analytical in its approach."

Another popular workshop was the one on investigative reporting (see story on I teams in the January, 1980 *BM/E*). Quite a bit of the discussion



*NIWS had one of the busiest booths in the exhibition hall and reported a significant number of sales*

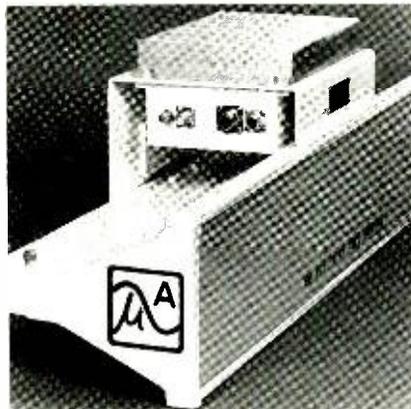

*Microwave Associates displayed its prototype 7 GHz array antenna for the first time at RTNDA*

## TV Programming

centered on the ethics of investigative reporting. Lea Thompson of WRC-TV, Washington, D.C., says, "You have to have long, hard philosophical discussions about what you will or will not do in going after a story. Do you pay bribe money? Would you show how to break into a car? Do you misrepresent yourself? These questions have to be dealt with because while we will be slinging mud at others, we have

to be prepared to have mud slung at us."

For an industry that is the constant focus of criticism it seemed strange to some that there would be two panels devoted to critical looks at broadcast journalism from non-industry panelists. The panel of media critics included Hodding Carter III, Jeff Greenfield, media critic for CBS News, and Bob Schulman, news critic for the *Louisville Times*. Schulman was a last minute substitution for Tom Shales of the *Washington Post*, who

was unable to attend.

Carter took the hardest stance against local news by saying flatly, "A lot of people in local news don't know what the hell they're talking about."

### Inequities in access

Greenfield and Schulman both worried about what Greenfield called "class bias" in reporting. Schulman felt that because poor people have limited access to the media, the impression is given that news is there to "give comfort to the comfortable and affliction to the afflicted."

"Business Talks Back" was the title of a panel made up of Robert Beck, chairman of Prudential Insurance, Brewster Atwater, Jr., president of General Mills, and Ronald V. Rhody, vice president of Kaiser Aluminum. Each in his own way felt that television did a poor job of reporting on business. They claimed there was too much reliance on government assessment of questionable business practices, that reporters were rarely schooled in business and could not provide perspective on how business operates, and that too often stories on business tended to be what Rhody called "trial by television." The panelists agreed on what would help to correct what they saw as the bad image of business—better-trained and business-oriented reporters. Their feeling was that there should be more reporting on business's contributions as well as its problems.

### Exhibits

Hughes Helicopter got a lot of traffic through its booth because of its small helicopter ENG system called the "Inflation Fighter." The piston-driven 300C helicopter is equipped with a new microwave transmitting system developed by Tayburn Electronics, and its \$160,000 price tag is about two-thirds less than larger systems. Hughes says that the cost breakthrough came about because of Tayburn's TBT-50 portable transmitter, which weighs only 22 ounces. The complete ENG package weighs just 25 pounds. The system is said to be capable of all the live functions of larger systems. A version of the system is in use at KPNX-TV, Phoenix. Hughes says that the new system will allow smaller market stations to get into this aspect of live television.

Microwave Associates surprised many people by showing the prototype of a new 7 GHz array antenna for ENG vans. It offers an alternative to the four-foot dish antenna. It is a fixed right circularly polarized unit with the option of left, vertical, or horizontal. It puts out 30 W of power with 24 dB gain. The unit can also be tripod-mounted. It's priced at under \$5000 and can be delivered in 90 days.



### The Merlin ME-188 Drop Out Compensator.

Since the introduction of the first drop out compensator, videotape has steadily improved, leading some to think the DOC is obsolete. But, the demands being placed on tape recording have also multiplied . . . especially in the case of the new one-inch broadcast VTR's which require increased density of recorded material.

While based on a proven concept, the Merlin ME-188 is a modern, state-of-the-art analog drop out compensator with a single line delay. Unlike a digital DOC, it can replace any drop out with information of the correct color phase and horizontal timing from the adjacent line. The whole line is not replaced—only an insertion just long enough to cover the drop out.

The ME-188 is small, self-contained and supplied with the appropriate interface for any broadcast quad or helical scan VTR at an old-fashioned price . . . \$4000 complete.


**Call toll free, 800-227-1980 for ordering information.**

(In California, call 415-856-0900, collect.)

# MERLIN

MERLIN ENGINEERING WORKS 1880 EMBARCADERO ROAD, PALO ALTO, CA 94303

Merlin Engineering has a full range of products and assemblies for bringing your broadcast VTR up to date, as well as complete engineering facilities for custom applications. Write for your copy of the 1980 Merlin catalog.



Circle 116 on Reader Service Card

Five companies exhibited some type of color radar graphic system: Colorgraphics Systems, Information Processing System (IPS), Technology Services Corporation (TSC), Weatheration, and Weatherscan International. "RTNDA is the only place where you have all the latest equipment available under one roof," says Eric Ober, news director for WBBM-TV, Chicago. For a complete rundown on color radar see *BM/E*, January, 1980.

The news computers drew a lot of interest because this is the first meeting following the pilot programs. KSL, Salt Lake City, and WQAD, Moline, Ill., both opted not to buy Station Business Systems' Newscom at the end of the six-month trial period. The system had been having some problems in the time it was taking to print the final script. George Papula of SBS says that the problem has been minimized with new software and that WQAD decided not to buy the system for economic reasons, not solely because of the system's debugging problems.

#### Too much, too soon

Spencer Kinard, news director at KSL, Salt Lake City, felt that SBS tried to do too much with the system all at once. He also made much of his decision for economic reasons: "Looking at the system and what it would cost, we didn't think we were ready to buy it at this point."

Even though the formal trial period is over, SBS is leaving the equipment at KSL so that the new software innovations can get a workout in a real newsroom. George Papula says, "As long as KSL is willing to work with us we will continue to work with KSL."

Jefferson Data System's Electronic News Processing (ENP) system has had more success because it is being phased in gradually at WBTV, Charlotte, N.C. And while JDS and WBTV are co-owned by Jefferson Pilot Broadcasting, there has been an openness in discussing problems with the system. A question was raised, for example, about whether the IBM Series I computer could handle the number of terminals proposed for the system.

JDS officials say that the system is still in the pilot stage and it is premature to speculate on the system's capacity before that capacity has been tested. They add that if the specifications call for the system to drive 20 terminals, when ENP is delivered it *will* drive 20 terminals.

Weatherscan is the weather reporting and on-air graphic component of Newscan. New software has increased the resolution of the computer graphic display. The quality of the picture attracted a lot of news directors who were looking into color radar systems.

One observer noted that there was so much attention on the graphics system that the news computer didn't make as much of an impact as it should. "Newscan is the most underrated system being sold," he commented, "because of the weather and graphic system."

Ron Hudson, marketing director of Newscan, did not respond directly to that point but noted, "We're getting about a tenth the traffic that we had at NAB, but there is a thousand percent more interest. And those that stop are

better informed. I didn't have to explain what a news computer did."

Basys, Inc., was showing its News Fury system, but seemed to be focusing more on gathering ideas than selling the product. It could be that Basys, having made a sell of a very large system to Ted Turner's Cable News Network, is less interested in making more sales at this time than in researching the market. Peter Kolstad of Basys says, "Right now, we are interested in selling a concept. The idea of who makes a sell is not as important as people being

## The **il** Eraser-Splice Locator

The only machine to combine precise splice locating and cartridge erasing in a single, automatic operation. Just insert the cartridge, and press "START." The tape is bulk erased while cartridge is running. Then, the splice is located. 2 year warranty. Only \$685.

CALL TOLL-FREE  
800-447-0414

Ask about our no-risk, 30-day trial order. Call collect from Illinois, Alaska, Hawaii: (309) 828-1381

INTERNATIONAL TAPETRONICS CORPORATION  
2425 South Main Street, Bloomington, Illinois 61701

Marketed exclusively in Canada by McCurdy Radio Industries, Ltd., Toronto




Circle 117 on Reader Service Card



**THIS is  
the Memory  
that  
Knox built.**

**THIS is the Disc  
that plays in the memory  
that Knox built.**

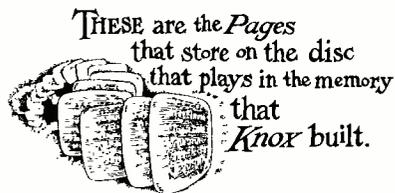


**THESE are the Pages  
that store on the disc  
that plays in the memory  
that Knox built.**



**THIS is the Program  
that cues the pages  
that store on the disc  
that plays in the memory  
that Knox built.**



**THIS is the Character Generator  
that typed the program  
that cues the pages  
that store on the disc  
that plays in the memory  
that Knox built.**

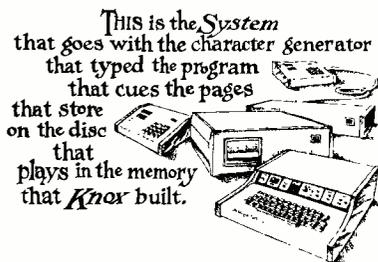

**THIS is the System  
that goes with the character generator  
that typed the program  
that cues the pages  
that store on the disc  
that plays in the memory  
that Knox built.**

Create and store up to 400 pages of character generator type on a single five-inch floppy disc.

Using the same keyboard, program the playback and store it — the program — on the same disc with your typed copy.

Call or write today for a demo to see what the Knox memory system can do for your screen.



A DIVISION OF COMPUTER OPERATIONS, INC

5001 — J Forbes Boulevard, Lanham, MD 20801  
301/459-2106 Telex 89-8327

Circle 118 on Reader Service Card

## TV Programming

convinced that the concept of a news computer is a viable one." Kolstad also noticed that the news directors were better informed about computers—"In fact, we got the idea for a couple of new products at RTNDA."

System Concepts' QuantaNews made an appearance at this year's convention with new, custom-designed hardware. Because the hardware is its own, the company feels that it can not only sell a basic news computer for less but also provide a character generator that is under the control of the news department so that supers, sports scores, weather information, etc. can be loaded from any of the news terminals. QuantaNews is aimed at the smaller markets. System Concepts feels that it can provide most of the features of the larger computer systems at half to two-thirds less.

All the computer vendors set aside their competitive situations at one point during the convention to get together to propose unified standards for wire service codes. The guiding force behind the standardization drive was Bill Ferguson of UPI. During the NAB convention, Ferguson polled vendors to see if they were interested in some kind of standard broadcasting code for news computers. A meeting was held at RTNDA to propose establishing codes that were in the same format as the ones used by the American Newspaper Publishers Association (ANPA), but redesignated via selector codes for strictly broadcast use.

All the vendors attended the meeting, as did Jim Hood from AP and Larry Cooper from KCBS. The group agreed to draw up a list of proposed codes and submit them to RTNDA for its approval early in the year. A proposal that RTNDA go on record as the sponsoring body for this new code standard was unanimously adopted by the membership.

### Other highlights

NIWS, the News and Information Weekly Service that went on line in November, made major strides at RTNDA. When NIWS arrived at RTNDA there were 24 stations signed up. There are now 39 stations in the line-up and more are expected soon. NIWS president David Salzman has no doubt that RTNDA made the difference. "We felt that we had to have a presence at RTNDA," Salzman noted, "but we did not expect to do any significant business there or as a result of being there in the short context. We were wrong. We were able to increase our line-up by about 60 percent as a

result of being at RTNDA." Some of the stations that signed up for the service included WCVB in Boston (considered a coup because WCVB has a reputation for rarely dealing with outside vendors for news product), KUTV, Salt Lake City, the Harte-Hanks group.


Angenieux introduced a new ENG lens at RTNDA. The zoom lens is a 15 × 9, 9–135 mm, with an aperture of f/1.5–1.9. The lens operates at very low light levels. It boasts a built-in 2 × extender that changes the focal length to 18–270. The lens weighs 4.6 pounds and is priced in the \$6000 to \$7000 range. Delivery for most cameras will be in early 1981.

Beston Electronics (BEI) had the distinction of being the only exhibitor in three places at once. Because BEI was the only vendor that had an electronic prompting device available that could interface with news computers, two of the computer companies were using the BEI DataPrompter as a component of their products. Jefferson Data Systems had it hooked in as the prompting interface with its ENP system. Station Business Systems' Newscom was using it for the same purpose but also was integrating the closed captioning function for the newscasts produced by its news computer.

The DataPrompter on its own could be used as another first step in a station's gradual move into computerized newsroom functions. The full DataPrompter System, which runs about \$13,000, not only acts as a prompter and character generator, but also has a text editor for writing and even filing news scripts. There is also an encoder available for line 21 closed captioning.

Electronics Application, Inc., introduced the new Christie On-Board Nicad ENG batteries. The KR series fits on most ENG cameras currently in use, including the new RCA TK-86. The battery charges in 12 to 14 minutes when used with the Christie ReFlex 20 "burping charger." Price for the battery is under \$500.

This year's convention attracted an official registration of 1570 people, the largest in the history of the gathering. But there were also, by one estimate, about 200 unofficial attendees. RTNDA is turning into a major job market. The bulletin boards were covered with resumes and the hospitality suites were full of people drumming up business for various projects. A number of vendors who couldn't get space in the exhibition hall were there nonetheless, buttonholing news directors in the halls and over drinks. Joe Rovitto, news director at WTAE in Pittsburgh, commented on all the activity by saying, "It shows that RTNDA has moved into the big leagues." **BM/E**

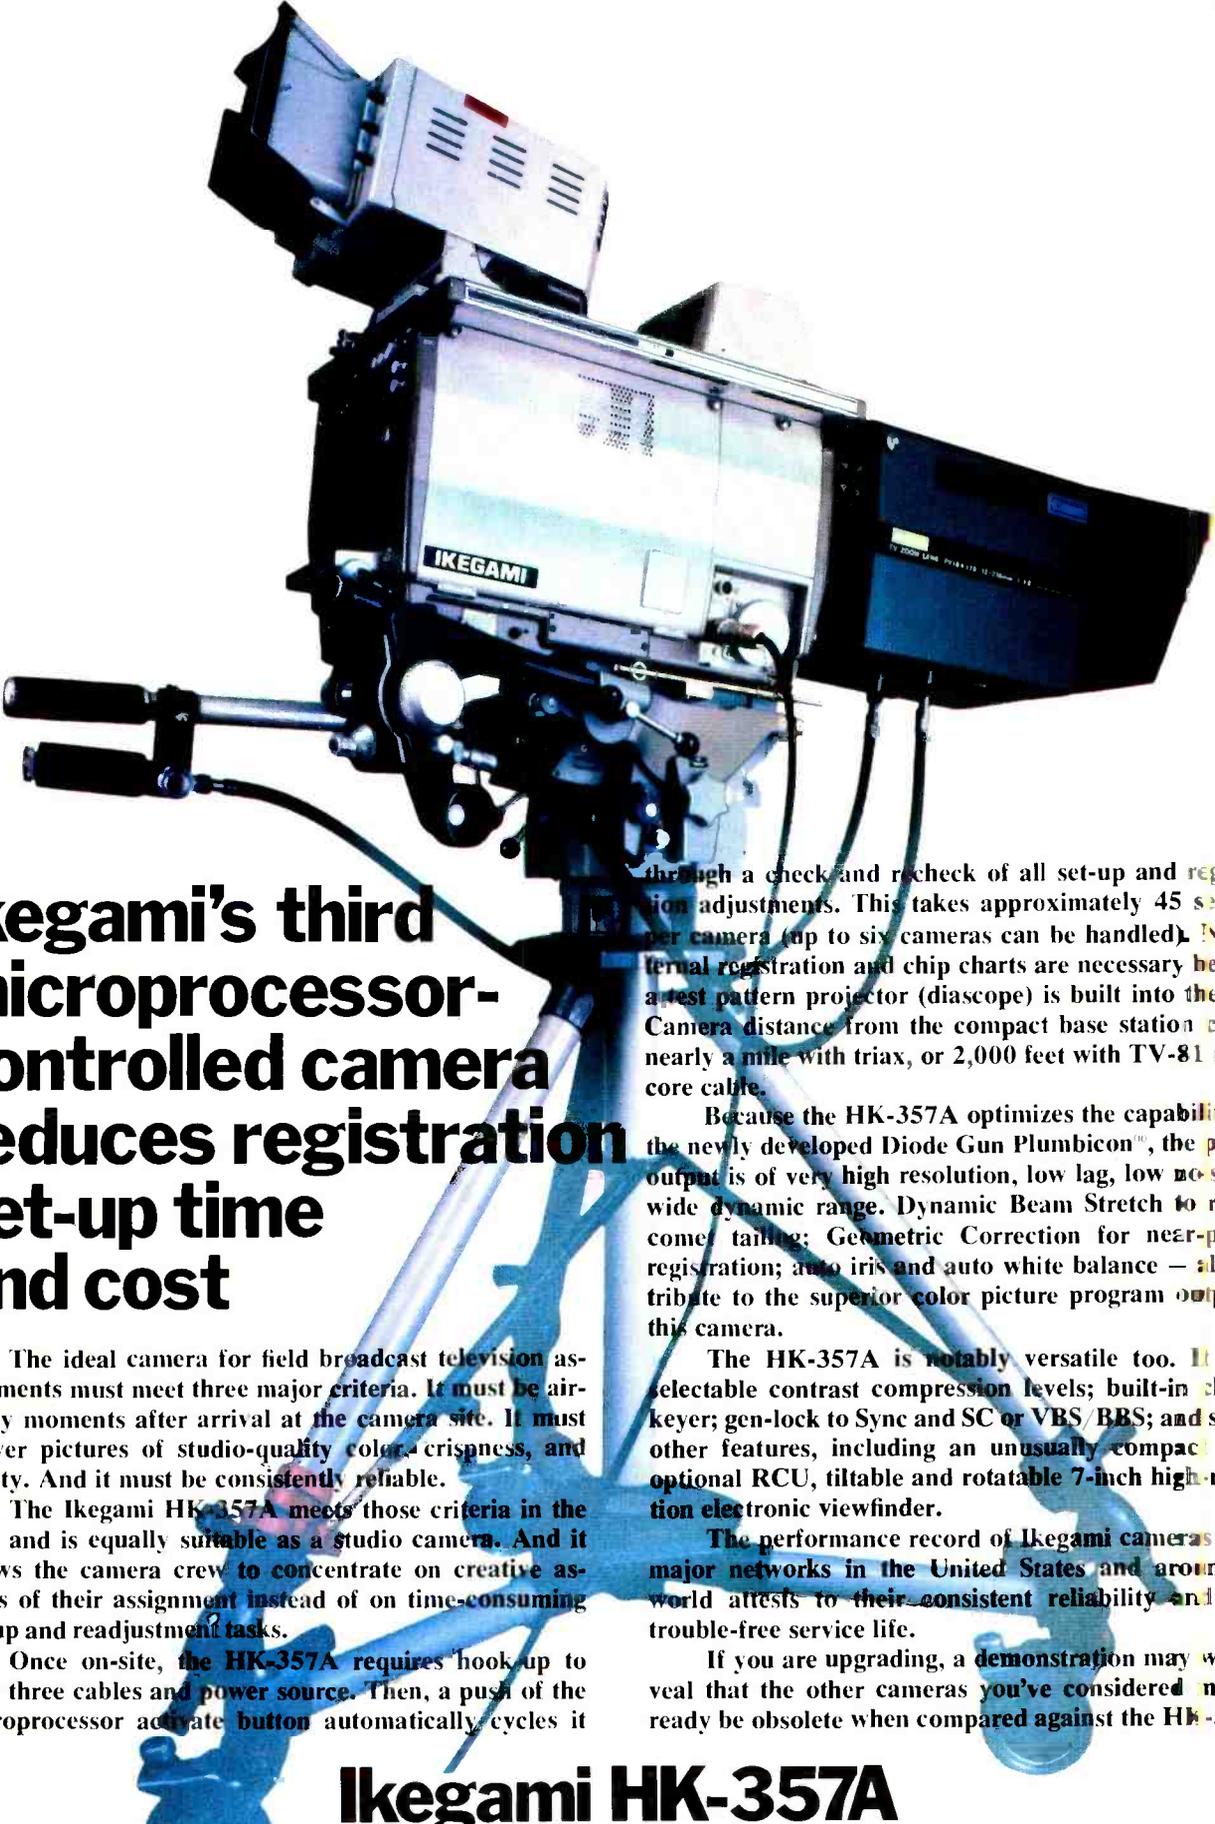A professional Ikegami HK-357A video camera is mounted on a tripod. The camera is silver and black, with a large lens and a viewfinder. The brand name 'IKEGAMI' is visible on the front. The camera is positioned on a tripod, and the background is a plain, light color.

## Ikegami's third microprocessor-controlled camera reduces registration set-up time and cost

The ideal camera for field broadcast television assignments must meet three major criteria. It must be air-ready moments after arrival at the camera site. It must deliver pictures of studio-quality color, crispness, and clarity. And it must be consistently reliable.

The Ikegami HK-357A meets those criteria in the field and is equally suitable as a studio camera. And it allows the camera crew to concentrate on creative aspects of their assignment instead of on time-consuming set-up and readjustment tasks.

Once on-site, the HK-357A requires hook up to only three cables and power source. Then, a push of the microprocessor activate button automatically cycles it

through a check and recheck of all set-up and registration adjustments. This takes approximately 45 seconds per camera (up to six cameras can be handled). No external registration and chip charts are necessary because a test pattern projector (diascope) is built into the lens. Camera distance from the compact base station can be nearly a mile with triax, or 2,000 feet with TV-81 multi-core cable.

Because the HK-357A optimizes the capabilities of the newly developed Diode Gun Plumbicon™, the picture output is of very high resolution, low lag, low noise and wide dynamic range. Dynamic Beam Stretch to reduce corner tailing; Geometric Correction for near-perfect registration; auto iris and auto white balance — all contribute to the superior color picture program output of this camera.

The HK-357A is notably versatile too. It offers selectable contrast compression levels; built-in chroma keyer; gen-lock to Sync and SC or VBS, BBS; and several other features, including an unusually compact CCU, optional RCU, tiltable and rotatable 7-inch high-resolution electronic viewfinder.

The performance record of Ikegami cameras at the major networks in the United States and around the world attests to their consistent reliability and long, trouble-free service life.

If you are upgrading, a demonstration may well reveal that the other cameras you've considered may already be obsolete when compared against the HK-357A.

## Ikegami HK-357A

Ikegami Tsushinki Co., Ltd., 5-6-16 Ikegami, Ohta-ku, Tokyo 146, Japan; Telex: 2466738 IKETSU J. Europe Representative Office, 4040 Neuss, Am Alten Weiher 13a, West Germany; Phone: (02101) 23069; Telex: 8517960 ITCD. Ikegami Electronics (USA) Inc., 37 Brook Ave., Maywood, NJ 07567; Phone: (201) 368-9171. West Coast: 19164 Van Ness Ave., Torrance, CA 90501; Phone: (213) 328-2814. Southwest: 330 North Belt East, Houston, TX 77060; Phone: (713) 445-0100.

Circle 119 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)



“Our Sony video recorders have not only traveled the equivalent of fifteen times the circumference of the earth, but they’ve logged more than 2,500 hours of taping time,” says Martin McAndrew, Vice President of Operations for Continental Colour Recording.

“Not one of these machines has ever broken down,” McAndrew adds. “What makes that even more impressive is that they’re constantly being used by different people with different ideas about how carefully to handle equipment.

“Seventy per cent of the time, our equipment is

used by ABC and NBC, but we also rent it to local television stations and production companies.”

Continental Colour, the country’s largest video equipment rental company, has specially built trucks and trailer trucks that are virtually television stations on wheels. Two of these trucks are equipped with one-inch equipment, including a total of two BVH-1100 and four BVH-1000 one-inch high-band video recorders. Continental has also purchased additional Sony recorders for its brand-new post-production facility.

“Sony picture quality is excellent,” says McAndrew,

# “375,000 MILES WITHOUT A BREAKDOWN.”

*Martin McAndrew, Continental Colour Recording*

“much better than its main competitor. And the slow-motion capability of the BVH-1100's means that each can do the work of two separate machines, in less space, at less expense. No one else's equipment can match these 1100's.

“No wonder our Sonys are almost always on the road. They've covered the World Series, the Winter Olympics, the daytime Emmy Awards, the Tony Awards, operas and symphonies for PBS, and the Pope's visit to the U.S. And we've had zero problems; working with Sony has been delightful.”

If you want one-inch equipment you can really get some mileage out of, find out about Sony's full line. It includes cameras, recorders, editors, and the BVT-2C00 digital time base corrector.

Write Sony Broadcast, 9 West 57th Street, New York, N.Y. 10019. Or call us in New York at (212) 371-5300; in Chicago at (312) 792-3600; or in Los Angeles at (213) 537-4300.

**SONY**  
**BROADCAST**

Sony is a registered trademark of Sony Corp.

Circle 120 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

**PHILIPS®**




# World Class TELEVISION

The internationally recognized camera and broadcast equipment technology preferred by broadcasters, production companies and industry around the world:



**LDK-14**  
The years-ahead 2/3-inch field and studio camera family. Now with triax capability.

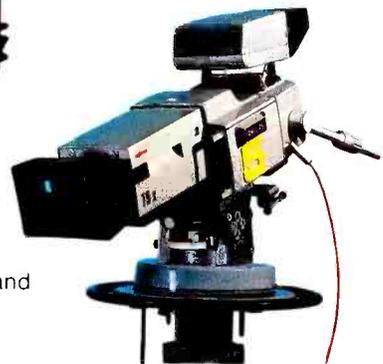

**LDK-5B**  
Digitally controlled triax version of the LDK-25B for studio and remote location applications.



**LDK-25B**  
Newest version of the World Class, state-of-the-art LDK 25/5/15 camera family. With innovations used by ABC in exciting coverage of the Winter Olympics.

Plus... a wide array of innovative World-Class products like:  
**Transmitters and Exciters**  
Fastest growing UHF/VHF transmitter line in North America.  
**Video Tape Recorders**  
1" type C, system and stand-alone.  
**Digital Noise Reducer**  
Fully automatic.  
**New, Synch and Timing System**  
Built around ultra-stable Philips SPG sync generator.  
**Test and Measuring Equipment**  
Modulators, demodulators, VITS analyzer & generator, and new waveform monitor and vectorscope.  
**New, Teletex**  
Text display system component.



Contact your Philips representative today, or, for more information, write (indicating product interest) to:  
PHILIPS BROADCAST EQUIPMENT CORP.  
91 McKee Dr., Mahwah, N.J. 07430  
(201) 529-3800

**PHILIPS®** *Innovative Leader in World Television*

Circle 121 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# THE BROADCAST PLANT: FROM HERE TO DIGITAL

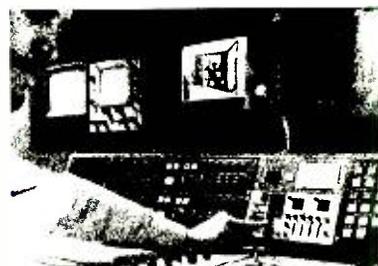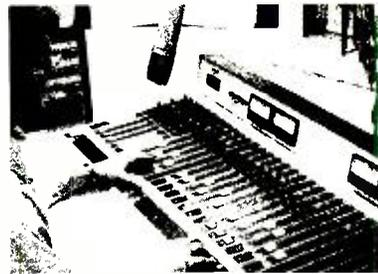

***“There is not a single, simple reason but rather a variety of factors that have combined to make serious discussions of studio digital systems a necessity for users of television everywhere in the world”—Fred Remley (122nd SMPTE Technical Conference). And the discussion is just as important to radio broadcasters.***

MUSEUMS, ANTIQUE SHOPS, and curiosity collectors are in possession of thousands of inventions developed over the years. Those that did not find a role in the marketplace are either said to have been “ahead of their time,” or are seen as manifest eccentricities. The truth of the matter is, inventions become innovations and innovations become standards of practice when, and only when, the needs of the marketplace and capacity of the invention coincide. The critical realization for today’s broadcaster, whether devoted to radio or television, is that digital audio and video are the only known technologies capable of meeting the industry’s long-term growth needs.

With the depreciation period for most broadcast equipment ranging from three to five years and the useful life of much production equipment doing better than that, it is fair to assume that much of the equipment purchased for today’s plant will still be around when digital video and audio begin to assume a dominant position in the production chain. This fact has not gone unnoticed by SMPTE, EBU, AES, and other industry organizations struggling with issues such as equipment interface standards, communication formats, audio and video recording standards, and common carrier considerations.

In the articles that follow readers will come to understand some of the problems confronting today’s broadcaster as the move to digital progresses relentlessly. Inherent in each step toward digital is the need for broadcasters

in radio and television to meet marketplace challenges. There is no turning back. For corporations currently involved in the broadcast industry, managers routinely see industry projections placing \$163,000,000 in advertising revenue in markets other than the U.S. by 1990. In the domestic market, by 1990 28.5 million homes may use cassette or disc recorder systems for home entertainment, 31.4 million homes will probably receive pay cable services, and 47.5 million homes will subscribe to regular cable television. The same projections see these figures more than doubling by the year 2000. (See figs. 1 and 2.)

Few, if any, reasonable pundits see the demise of broadcasting. It will continue to be the single most dominant mass communications medium well into the next century. While broadcasting currently enjoys a near-monopoly on electronic mass communications, what planners and investors see is a slowly decreasing share of market for broadcast as these new technologies come on line. All three major commercial networks are already diversified communications companies that actively seek new interests in the cable television, video disc, and motion picture markets. CBS, supported by NBC and ABC, recently sought a declaratory ruling from the FCC regarding financial interest in nonbroadcast rights to programming. In December, CBS asked the Commission to waive its rule prohibiting major television networks from owning cable television systems. CBS wants only the right to experiment with new programs and services on a system of 90,000 subscribers or less but it, the other networks, and many broadcast companies have made no secret of their desire to enter this new market. Both CBS and ABC have announced plans to develop special program packages for cable distribution.

At the recent Outlook For The Media 1981 Conference, held in New York, several group broadcasters explained their plans for expanding their interests in the cable and nonbroadcast markets. Cox, McGraw-Hill, and Harte-Hanks Communications Inc. were among the presenters.

So, the interest of major broadcasting companies and

# Now Harris puts low cost multiple TV program sources at your fingertips!



With the new Harris Satellite to Studio Link (SSL), over 40 additional program sources are instantly available to your station—with many more on the way on a regularly scheduled basis over the coming years.

The Harris SSL system provides complete satellite receiving flexibility...from transponder to transponder, and from satellite to satellite. Type a keyboard entry and the system will reorient a precision satellite antenna to a preselected satellite/transponder, and provide you with a broadcast quality signal for retransmission. All within the time required for a commercial break (72

seconds maximum). The cost is much lower than individual antennas for each satellite, and the signal quality is superior!

Take advantage now of the new alternatives in programming that are available through Harris' Satellite to Studio Link. Also, remember that Harris is a complete system supplier, from satellite antenna to studio to transmitter to broadcast antenna—and all the required links in between.

For more information contact your Harris TV District Sales Manager, or Harris Corporation, P.O. Box 4290, Quincy, Illinois 62301. 217-222-8200.



**HARRIS**  
COMMUNICATION AND  
INFORMATION PROCESSING

Circle 138 on Reader Service Card

## The Broadcast Plant

by extension, most broadcasting companies, is to take advantage of technological changes so that they are major participants in these new media. If, as some studies project, traditional broadcasting will slip to a 70 to 80 percent share of audience by 1990 while pay, cassette/disc, and cable will share the remaining 20 to 30 percent—clearly—significant portions of that 20 to 30 percent share of the audience will still be viewing the products produced by today's broadcast companies. As indicated by the advertising revenue projections quoted earlier, the international market for television programs is also growing in importance. There is already a significant increase in commercial broadcasting abroad as England, Italy, and Spain add commercial networks, while other countries consider future growth for both commercial radio and television. Interest in cable, direct broadcast satellites, and pay TV is also growing rapidly abroad. The existence of a world split into NTSC, PAL, and SECAM television standards represents a serious barrier to program exchange and this realization was, in fact, the primary concern prompting Europeans to begin research into digital television more than 10 years ago.

### Demand for more product conflicts with costs

While the numbers of channels available for the distribution of programming promise to increase by an order of magnitude over the next 10 years, the means for producing the programs to fill those channels grow more slowly. Already, cable systems boast 50 or more channels, yet often are able to fill only a dozen or so. The videodisc industry continues to sputter along, blaming a shortage of software; yet RCA plans an \$18 million marketing investment to push its players into American homes in 1981 and beyond. Interest in direct broadcast satellites and multi-point distribution systems continues to grow. Cable has already turned to multi-tiered services offering subscribers two or more choices of pay TV channels.

Meanwhile, the cost of producing programming continues to escalate. According to a report in *Variety*, the average motion picture now costs 25 million dollars to produce. A single one-hour episode of a prime-time action series costs the networks \$500,000, and series producers scream that the price doesn't even begin to

cover costs. To meet the diversified programming needs of the audiences reached by these new channels new program forms, less costly to produce, will have to be developed and traditional program forms will desperately need to control the escalation in production and distribution cost.

As noted in last February's *BM/E* special report, "Strategies For The 1980s," broadcasters plan to restructure the way they market programming in order to defray the cost of production over several marketplaces. Not only will there be a network run, reruns, off-network syndication, and foreign sales, but attempts to repackage programs for pay TV, cable TV, and videodiscs. Larger projects such as *Battlestar Galactica* and *Shogun* are even now edited as theatrical releases for foreign distribution. While these costs seem staggering, the cost of producing local programming has similarly spiraled upwards.

### Digital controls costs and increases productivity

The interest in digital audio and video, from a management perspective, is the hope it holds out for the control of costs and its promise to increase productivity. Manufacturers of broadcast equipment see the opportunity to design and build digital equipment that may be suitable to broadcast and nonbroadcast markets and domestic and foreign markets, thereby reducing their per-unit production cost measurably; R&D cost would be defrayed over a larger volume of sales. Broadcasters, of course, hope that these savings to the manufacturer will be passed along.

Greater productivity for the broadcaster relies heavily on the hope that new media will provide additional markets for programs and that more programs can be produced with fewer people. In the articles that follow (see "Machine Control At KPIX: Cornerstone To Digital" and "Machine Control Trims Equipment Costs, Prevents Labor Expansion") it can clearly be seen that the first step toward increasing productivity is the elimination of wasted time and motion. Machine control and clean intra-plant signal transmission allow routine activities, such as tape loading, and machine operation to involve fewer people. At the same time, machine control also puts into the hands of the producer all the technical resources needed to produce a project with a minimum of preproduction time spent organizing equipment. Productive capacity will stand idle less often:

While taking effective control over a production facil-


## Advertising Expenditures Outside The United States

(Millions Of U.S. Dollars)

	1980	1990	2000
United Kingdom . . . . .	\$ 6,140	\$ 16,000	\$ 40,000
West Germany . . . . .	7,100	21,000	65,000
France . . . . .	4,500	13,500	40,000
Italy . . . . .	1,100	4,000	12,000
Japan . . . . .	10,500	30,500	83,000
<b>Total</b>	<b>\$29,340</b>	<b>\$ 85,000</b>	<b>\$240,000</b>
All other countries outside the U.S.	\$25,660	\$ 78,000	\$220,000
<b>Total outside the United States</b>	<b>\$55,000</b>	<b>\$163,000</b>	<b>\$460,000</b>

*The increasing importance of the international market and the advertising dollars it will attract presents a strong motivation for minimizing the technical barriers to program exchange*

## The Broadcast Plant

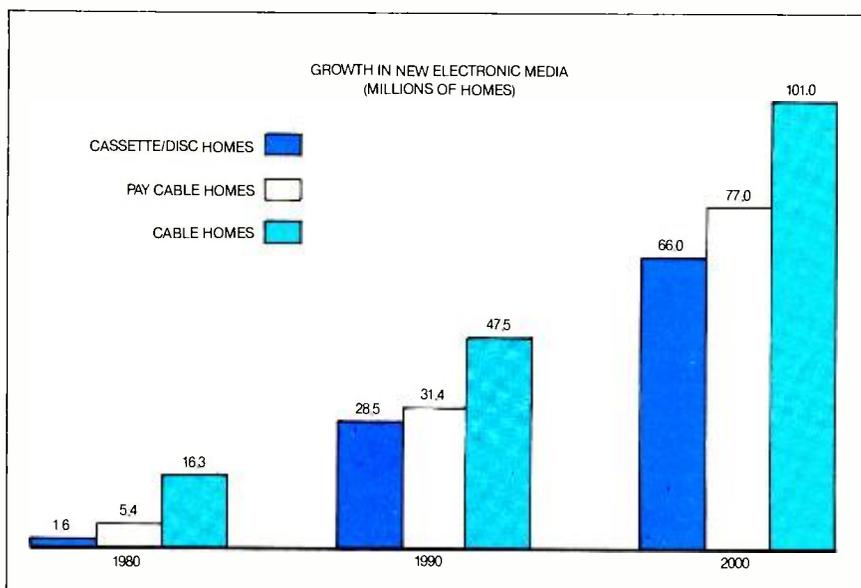

*While broadcasting will remain the dominant medium in the years ahead, its share of audience is likely to decline as new media penetrate the market. Digital technology holds out the hope that broadcasters will be able to meet the enhanced quality demands of these non-broadcast markets*

ity's resources may be the first step toward the all-digital plant, it is only a tentative one. As broadcasters who have gone through a transition from a manual traffic and billing system to an automated system know, computers can make a good manual system much better and a chaotic manual system much worse by accelerating the rate at which errors occur. The same experience can be expected in machine control automation systems, with the difference that design of an effective technical operation is a more logical process than the design of an effective business system since the objectives are clearer and results more easily observed and measured. But while there will be problems, the results will prepare a station for the future by bringing all of the station's technical capacity into a logical relationship.

The next step after the establishment of effective machine control will be the introduction of systems and subsystems that handle video and audio in digital form. Broadcasters are already familiar with many such devices ranging from framestores to reverberation units for radio. Digital video and audio devices in use today, however, are only harbingers of things to come. (See "Digital Television Development: A Look Into The Future.") For radio, the transition to digital might even precede television's. Effective digital audio recorders are already in the marketplace, with scores of other devices coming on-line continuously. (See "Coming: The Digital March Into Radio.") While television will pursue digital technology in its search for new markets and greater efficiency, radio will adopt digital technology in its effort to keep the quality of its product comparable to the quality offered listeners by digital consumer products.

The ramifications of this changeover are staggering. While some see digital broadcast technology as a great dream, others see it as a nightmare. The change will be even more traumatic for engineering and operations personnel at television stations than the changeover to color TV. Both radio and television will share the trials of introducing digital technology to a generation of technicians versed in analog and used to gaining familiarity with a particular piece of equipment through constant

adjustment of it. Digital equipment will require far less adjustment and breakdowns will be less frequent. Documentation of digital systems and service manual practices will need radical overhauls in order to permit timely and effective maintenance of broadcast systems. Certainly on-board diagnostics, modular replacement of failed parts, and the introduction of sophisticated test and measurement equipment will ease this trauma, but digital systems will fail too, sooner or later.

When a digital system suffers a catastrophic failure beyond the skill of the system's diagnostics or the station's technicians, the relationship between the manufacturer and the user will be of immense importance. Stations will need highly trained personnel (though not as many) in the station to work with the manufacturer's engineers and programmers. Manufacturer's field service teams as well will have to be highly trained, and therefore expensive. Operations and maintenance concerns desperately need to be thought through as broadcasting edges into the digital era. (See "From Analog To Digital: The TV Plant In Transition.") For broadcasting will "edge into" digital. This year at the NAB convention in Las Vegas, radio and television broadcasters will see even more computerized equipment and systems designed to use audio and video in digital form. Progressively, these sub-systems will be added to the broadcast plant and analog will move over more each successive year to make room for digital. The most difficult years lie just ahead of us as broadcasting tries to make the old live side by side with the new.

Analog technology is not standing still, and its pace of quality enhancement keeps pushing ahead the goals that digital must reach. Broadcasters have not purchased their last piece of analog equipment. Cameras, recorders, switching systems, and a host of other systems remain analog, though digital technology keeps closing the gap. The important thing for broadcasters to remember is that the road does, in fact, lead from here to digital. Without preparation, planning, and a clear vision of the evolving technology, the stumbling blocks will be many and the road extremely rough.

**BM/E**



# video power.

## Unbeatable with this single SFX fader!

One SFX Amplifier gives you...

- complete control of 4 video sources, individually or in any combination...
- you are never locked out...
- plus, you can preview any transition without affecting the On-Air signal...
- all with the same fader handle!

And that's just part of the CD-480 story... the first new generator switcher and still the most powerful available today. Plus there are 7 models designed to meet any requirement, and priced from \$25,000.

Remember. When it comes to switcher power, make sure you talk to CDL for the full story. Over 300 customers have, and they now have the CD-480 competitive advantage.

The CD-480 Mobius Loop logo symbolizes the recirculating effects capability of the CD SFX Amplifier.



You can cut, mix or wipe between 2 Background and 2 Key sources individually or in any combination with a single SFX Fader handle.



### CENTRAL DYNAMICS LTD

Central Dynamics: 10 W. Main St., Elmsford, NY 10523, 914-592-5440  
Chicago: 312-991-4720, Los Angeles: 213-789-0574, Atlanta: 404-491-9037  
Dallas: 214-785-5764, Denver: 303-623-7603, CANADA-Montreal: 514-697-0810

Circle 122 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# CREATIVITY TAKES FLIGHT ON AMPEX VIDEO TAPE.



## BROADCASTERS AND PRODUCTION COMPANIES DEPEND ON AMPEX TAPE.

From videotape equipment to the video tape itself, broadcasters and production companies throughout the world depend on Ampex. High quality, durability, reliability, and prompt service are just some of the reasons.

Ampex 175 Highband Quadruplex Video Tape has proven itself under every conceivable type of operating condition within every video standard. Excellent color performance, low drop-outs, and a tough durable formulation with low headwear are features which have contributed to this dependability.

And now Ampex 196 High Energy Broadcast Helical Video Tape has been specifically engineered to fill the increasing needs of a particularly demanding group of video professionals—those who have chosen one of the new broadcast helical VTRs.

No matter what your video tape needs are, there's an Ampex video tape for you. And, once you've tried Ampex tape, you'll see why broadcasters and production companies have grown to depend on Ampex.

QUADRUPLIX VIDEO  
175

1" BROADCAST HELICAL  
196

# AMPEX

## REFLECTIONS OF REALITY. AND BEYOND.

Ampex Corporation, Magnetic Tape Division,  
401 Broadway, Redwood City, CA 94063 415/367-4463

Circle 123 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)



**MOVING FROM  
HERE TO DIGITAL**

# COMING: THE DIGITAL MARCH INTO RADIO

**Already, in remote control, in reverb systems, in various kinds of switching, the radio broadcaster is using digital technology almost on a routine basis. But the big takeover is still ahead; it will ride in mostly on the digital tape recorder and the digital audio disc, both now poised just offstage. When the mostly digital plant arrives, broadcasters will have fantastically varied, accurate, and versatile control of their plants and of the characteristics of their signals.**

FOR RADIO BROADCASTERS, digital technology is like an army with forces massed around the analog frontier; it has already claimed some outposts in analog territory. The attack will come on one front after another, and like most multi-front attacks it is sure to succeed within some reasonable period of time.

But it will not be a fast sweep, a sudden rout. Analog technology has, and will have for a long time, the advantage of much lower cost. Analog is there, on the job: it can be displaced only if digital does something radio broadcasters want and can't get with analog techniques.

However, the logic driving the digital advance is strong enough to keep a general forward movement underway, one that will change radio technology drastically in three to five years. The changes will give the broadcasters far more flexible and accurate control of their plants, eventually at reduced costs. It will improve the technical quality of the product sharply, and this better signal will be not an "extra" but a necessity in the competitive situation of the late '80s and thereafter.

In this article *BM/E* surveys first the main lines along which digital technology is advancing into the radio plant. Then we sketch briefly the characteristics, as far as we can see them now, of the all-digital or mostly digital plant and note some of the moves the radio broadcaster can make now to ease the transition to the future.

## **Remote control/ATS: digital at work**

In the advanced remote control systems now available to the radio broadcaster we find digital techniques showing their advantages to good effect. First: digital systems can "read" meters far more accurately, quickly, and surely than any operator, both for monitoring and control. The system can know within a small part of a second when any quantity is out of tolerance, and issue the

warning or initiate the action the user has specified in advance.

One function in which this has special value not often noted, as pointed out to *BM/E* by John Bisset of Delta Electronics, is in automatic modulation control, in which digital signal analysis, driving an automatic gain-control system, can take a lot of pressure off "amplitude crunching" in variable-gain amplifiers. The digital controller compares the modulation level at every instant to preset values and adjusts the volume control in an appropriate amplifier to keep modulation as high as is wanted without overload. Since a microprocessor is involved, the system can be given complicated instructions.

Similar flexibility and accuracy result from the use of digital techniques in the other remote control functions. The system constellation that is developing here has validity for the whole digital plant. At each major function, a "local" microprocessor provides a "smart" terminal that can act on its own initiative for a number of particular objectives. A mainframe computer can assume control of all the microprocessors for overall coordination.


Bisset and Charles Wright of Delta point out an important value of this high-accuracy control. It makes possible an extensive exploitation of the new FCC rules on operators. Far less operator skill is needed for routine plant operation, and the system can, in fact, be given a high resistance to "operator goof" by careful design of both hardware and software. This frees the management to make wider use of lower-grade operators, as allowed under the new FCC rules.

Several other firms with advanced radio remote-control systems are showing the basic strengths of digital techniques in similar ways: Time and Frequency Technology, Harris, Moseley are some of them. All make excellent use of digital techniques to supply the accuracy, speed, capacity for sophisticated action, and resistance to operator mistakes that will spread throughout the radio plant with the spread of digital techniques. And all, as noted many times in this magazine and elsewhere, bring the great advance of putting system enlargements, instructions, and operation refinements in the *software* rather than the hardware. This is one of the most valuable attributes of the computer-controlled broadcast plant.

## **Program switching: another digital territory**

Automation of program switching is a long-established technique in radio. Digital techniques are part of it in the "memorizing" of program sequences covering

# 9100 Digital Video Processor

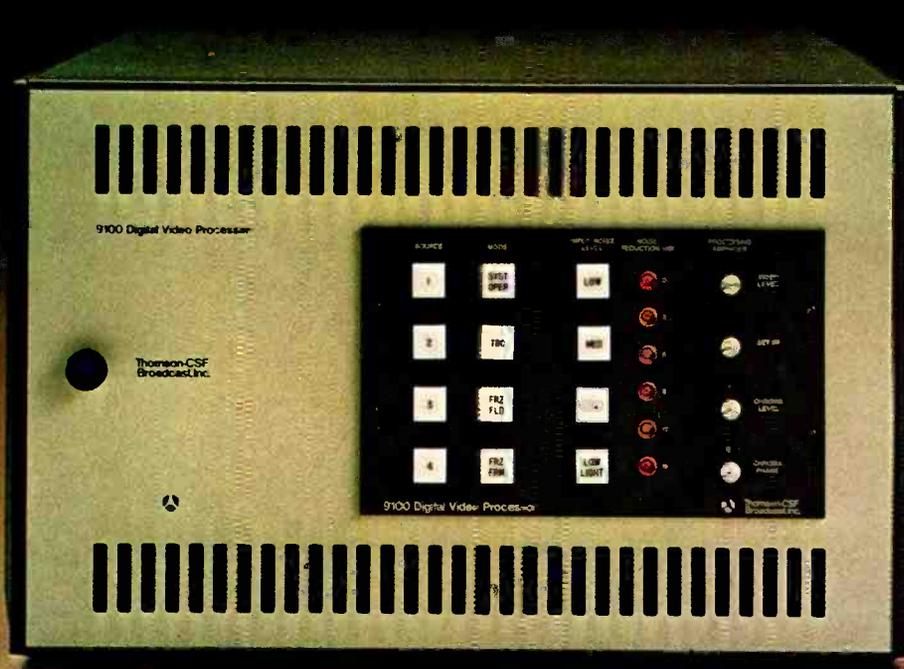

## Noise Reducer Frame Synchronizer Time Base Corrector.

The new Thomson-CSF 9100 Digital Video Processor gives you all three capabilities — yet costs only slightly more than ordinary systems.

We developed noise reduction technology that delivers up to 15 dB of S/N improvement in four presettable settings. So satellite signals become clearer. Film-to-tape transfers are less noisy, less grainy. And for ENG applications, signals come out sharper, without the excessive low-frequency chroma noise identified with 3/4-inch VTR's.

But here's what makes the 9100 such a wise investment.

We've added a frame synchronizer that gives you the added feature of freeze-frame capability. A built-in line-by-line time base corrector for 3/4" VTR's. And, a convenient 4 x 1 switcher frees valuable cross-points while a processing amplifier provides complete output signal control.

Only Thomson-CSF gives you so much versatility and signal improvement in a single video processor.

The new Thomson-CSF 9100 Digital Video Processor. A lot more than noise reduction. For just a little more money.

Call or write today for com-

plete specifications and/or a demonstration at your facility.

In the Northeast:  
Frank Shutelt  
(203) 327-7700

Mid-Atlantic:  
Al Audick  
(202) 296-9189

Southeast:  
Frank Benson  
(404) 487-6756

Mid-West:  
Tom Lorenzen  
(312) 356-5575

Southwest:  
Marty McGreevy  
(713) 933-1700

West:  
Mike Clayton  
(213) 849-2188

### Thomson-CSF Broadcast, Inc.

Thomson CSF Broadcast, Inc.  
37 Brownhouse Road  
Stamford, Connecticut 06902  
Tel. (203) 327-7700  
TWX (710) 474-3346

Circle 124 on Reader Service Card

www.americanradiohistory.com

## The Digital March Into Radio

days or weeks of operation, with the indicated switching sequences carried out by mini-computer. Andrew Jettner, concerned with the design of the Harris System 90 automation and facilities control systems, pointed out to *BM/E*, again, the desirability of having some distributed processing, with microprocessors at various control points and an overall computer. This, he said, leads to better reliability. He gave a piece of future-directing advice: computer control is coming so fast that it is well, even now, to look toward interface compatibility among all the digital systems in a broadcast plant. With standardization on, for example, the RS-232 serial interface, the broadcaster has a lot of freedom to add, change, rearrange the various elements of the plant while keeping all the advantages of digital control.

Jettner foresees the use of fiber optics communication around the digital plant, with its speed, immunity to interference from RF and hum signals, and very large bandwidth. He also predicted (as did some others—see below) the coming of digital audio signals to the radio plant in the form of both the digital disc and the digital tape recorder. The digital disc, as a storage medium of extremely high density, could greatly reduce shelving problems in the automated system, with 1000 or more short musical selections taking up one small shelf.

Beyond the convenience, the digital disc could transform automated operating by raising the technical quality of the program material several long leaps beyond that standard today. There is more on the digital disc below.

The radio broadcaster now has a wide selection of excellent digitally operated program automation systems (with the signal, of course, in analog form), surveyed on many occasions in this magazine. The meaning of these systems to the digital plant of the future is large: they will quite readily interface with larger and larger measures of digital control, and will gratefully accept, as noted just above, the signal itself in digital form.

### Reverb, special effects

Digital technology has been one of the mainstays of the reverb/special effects "spectacular" of a dozen or

more excellent units that bring the radio broadcaster endless versatility in these areas. Most readers by now know at least the main outlines of this technology, and several hundred radio stations, at least, are using one or another of the devices on the market.

By converting the signal to digital form, the reverb/special effects designer gets quite easily a stable of incredibly varied functions. Similar functions can be carried out with the signal never leaving analog form, but the general opinion finds this less versatile and efficient than digital manipulation.

Again, the reverb/special effects unit will be a standby of the all-digital plant, and it won't need the internal A-D and D-A converters that are now universal in this application. Moreover, it will easily combine with digital signal-processing in an all-handling digital unit: more on this below.


### The digital intercom

Digital control of switches is basic in some of the applications we have discussed. It is here in another area: the top-quality intercom and program-around-studios distribution system. There are great advantages in having all switching for an intercom-distribution system carried out in one central unit, with each terminal connected to the center in an arm-and-hub structure. And again, the most versatile and efficient operation comes with a microprocessor in each terminal, which can be programmed for various connection schemes that then become available at the touch of a button.

An outstanding system of this kind is Intercom 80, now built and sold by Sound Systems, Inc., of Long Island City, N. Y., and based on an earlier system of the kind marketed by Automated Processes, Inc. When the latter firm went out of business, some key personnel formed Sound Systems and refurbished the intercom as one of their products.

### What's ahead

Digital techniques are creeping into the radio broadcast plant along some other paths, but the main ones are those noted in the foregoing. Large bits of the territory still to be occupied, with the digital invasion right on their borders, are the key plant unit, the audio console; and the

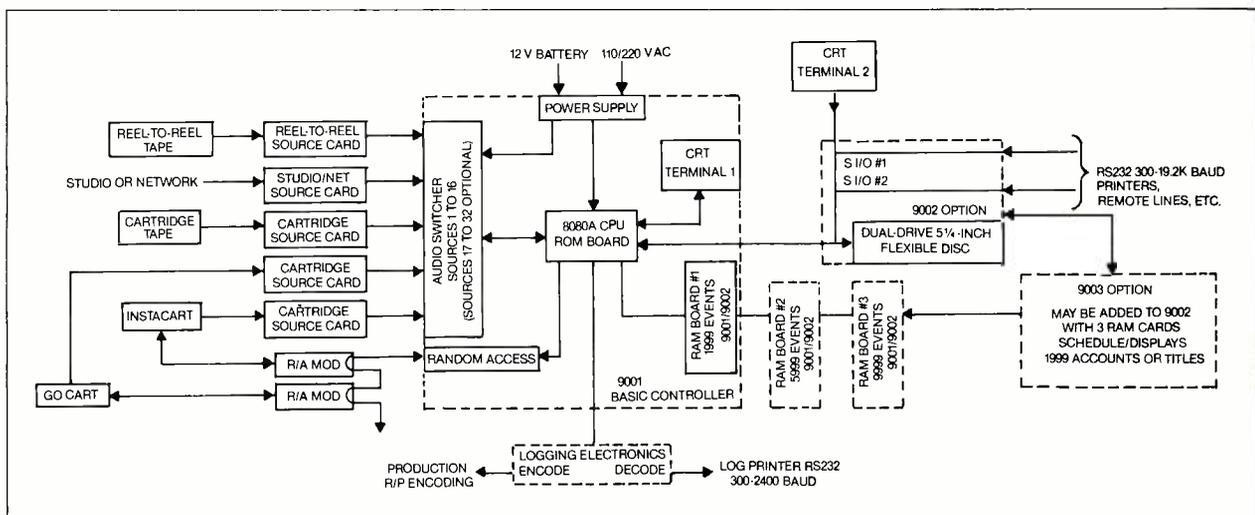

Large program automation system in which digital signals are used for a number of functions is the Harris 9003. Functions include accurate switching, and storage of song titles, names of artists, and news copy in computer memory for instant recall

# DBX HELPS KMJQ WORK MAJIC.

Majic. It's a black format that's living up to its name in several markets across the country. And perhaps the biggest success story is Houston's KMJQ. Back in 1977, KMJQ adopted the Majic format and went from near bottom to #1 in just 2 short Arbitrons.



Yet KMJQ was the softest station on the dial.

"To achieve our goal," explains Chief Operator Leroy Dietrich, "we placed a lot of emphasis on the quality of the sound. By the day we started the Majic format, we had built a technical ability that we think is probably one of the best in the country.

"We hired an audio consultant to get us started," continues Dietrich. "He installed P 303 pre-amps and MC20 moving coil cartridges on SL-1100A turntables. Then he recommended dbx equipment for definition and dynamics."




KMJQ installed dbx tape noise reduction on all their cart machines. Not just for their program material, but for their commercials, too. "That keeps our advertisers happy because their commercials sound as clean as our music," says Dietrich. "And



we use a dbx Model 500 subharmonic synthesizer to restore the low end.

It makes the station sound especially well balanced. Even at low listening levels."

KMJQ also needed a compressor/limiter – but they didn't want to ruin the sound quality they had worked so

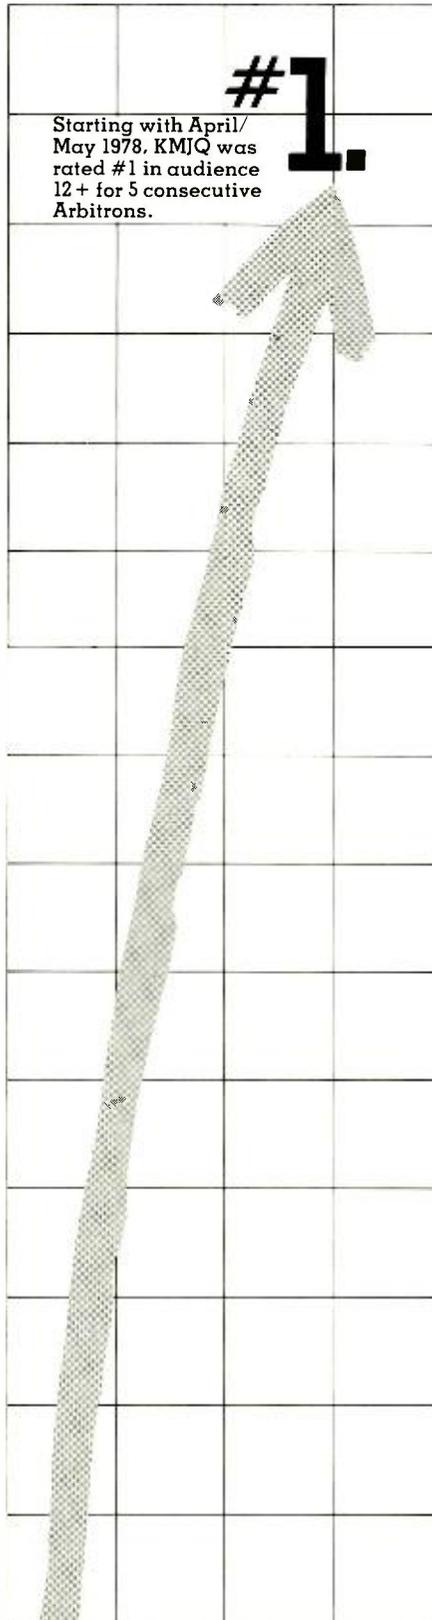

hard to get. "After hearing how smooth the dbx 165 compressor/limiter works, there is no doubt in my mind that it's the best limiter I've ever heard in my life. We use it on voices, and it gives us the control we need without sounding like we have any control."



As you'd expect, KMJQ has constantly been making subtle technical changes to maintain their leadership position. "Due to competitive forces in the market, we've had to crank our signal up louder. Without dbx tape noise reduction on our carts, the noise would have been cranked up, too. Now I'm happier than ever that we're fully dbx'ed," says Dietrich. "We not only get the sound we want, but the whole system is incredibly reliable – bulletproof."

Dietrich summarizes his feelings about KMJQ's technical product by saying, "A lot of this is subtle stuff, psychoacoustics. But people comment to us that our station sounds more like the record they bought than the other stations do. A psychological thing, agreed. But it all adds up when you start reading the Arbitrons."



For more information on dbx's complete line of equipment for the broadcast industry, write Professional Products Division, dbx, Incorporated, 71 Chapel St., Newton, Mass., 02195, USA. Tel. (617) 964-3210. Telex: 92-2522. Distributed in Canada by BSR (Canada) Ltd., Rexdale, Ontario.

Circle 125 on Reader Service Card

www.americanradiohistory.com

## The Digital March Into Radio

systems, disc and tape, for recording and playing back the signal itself.

Let's look first at the digital audio console, which is beginning to appear in experimental, prototype form. At the recent Audio Engineering Society meeting in New York (November, 1980) at least two early digital consoles were described in technical papers, one from Matsushita in Japan and one from EMI in England. There seem to be no large problems in the technology of the digital console. The impression gained from these experimental units is that cost is still very high compared with standard analog consoles, and physical size (in the case of the EMI unit) dismayingly large. But these are for-the-moment problems.

We will talk about the coming of the digital signal in a moment. It is important first to establish the central role of the digital console in the mostly digital plant. The console will be the natural center for all control functions, and might well include the overall computer that runs the plant. It will hold, of course, the signal level and switching controls, and also signal processing units, which will be parts of, or subsidiaries to, the computer.

The processing of the audio signal in digital form will supply some of the great advances in precision and versatility. The digital filter and the digital equalizer are already being explored by engineers. For example, a paper by John Umhey, consultant of New York, given at the recent AES Convention developed the theory for parametric equalization using digital filtering techniques in the 2920 signal processor. This is just one of the approaches to the technique in recent technical literature.

The digital equalizer will be able to do things that no hard-wired analog component equalizer can, and moreover its characteristics can be altered by changes in software, making it highly controllable over a wide range. A bank of such equalizers built into the digital console will give the broadcast operator a control of signal character far more detailed and accurate than today's control.

As already noted in our discussion of the Delta modulation controller, digital techniques will allow the modulation density to be increased with a minimum of damage to signal quality. The designers of the new class of FM and AM processors that has appeared in the last few years have, in many cases, performed prodigies in the control of modulation levels without seriously distorting the signal. With the signal in digital form, the processor builders will be able to go farther in this direction.

### Interfacing In The Computerized Radio Plant—One Way To Do It

As digital devices and systems take over more and more of the jobs in the radio plant, interfacing them with each other and with controlling computers will become a very serious design requirement. By planning ahead radio broadcasters can save a lot of money and avoid frustrations: they should move into digital technology with the interface problem always in mind.


In a paper read at the AES Convention in New York in November, 1980, Alan Derr of Eventide Clockworks described the excellent results available with the IEEE 488 standard interface bus. This is a parallel-feed eight-bit bus, and as such is very fast in action. Derr said that all Eventide products capable of computer control are now supplied with interface for this bus. It will connect a computer with a piece of microprocessor-controlled equipment that has the proper input arrangements, a function that will be basic in the computer-controlled radio plant as it is now developing.

The bus can transmit control to up to 16 devices, reaching the one wanted in each case through the use of a six-bit address.

Derr points out that the system would be excellent for connecting up computer control of a radio automation system. There would be a single small computer and microprocessors at each of the tape machines to be controlled. Each piece of program material, PSA, ID, and commercial would have an address; the tape machine location with that address would be cued up in advance for automatic rolling at the proper time by action of the computer. Setting up the system for this standard program automation sequencing would be easy and effective with the 488 as the interface.


Another use that has increasing attractiveness is connecting computer control to automatic test equipment. Derr points out that most of the leading test equipment makers are now equipping their units for connection to this particular interface system: among them are Hewlett-Packard (the patent holder of the 488 system), Tektronix, Gould, and Fluke. For the other end of the link, small computers increasingly are supplied with IEEE 488 bus control among their features. The system is assuming the character of an industry standard.

Automated mixdown on recording consoles is another use for the interface that is increasing. This is not as pressing an area for radio broadcasters as program automation. But extremely handy in radio stations is a way of changing the timing of commercials to make them fit. Derr tells a good way to do it, using two tape machines, a desktop computer, the IEEE 488 bus, and an Eventide Harmonizer. The accompanying block diagram of the system shows how it works.

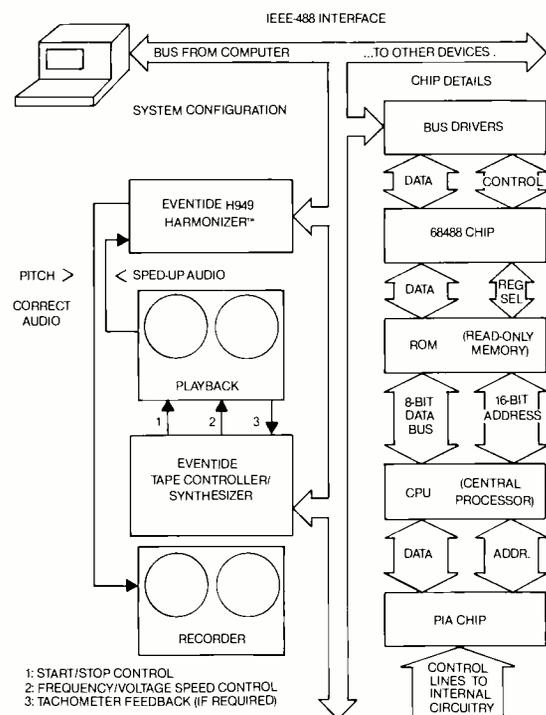

Typical use of IEEE-488 interface bus, drawn by Richard Factor of Eventide Clockworks, shows system for changing time of commercials. Right section is detail of interface. Left shows how two tape recorders, plus other units, are controlled by computer for speed change

# The Digital March Into Radio

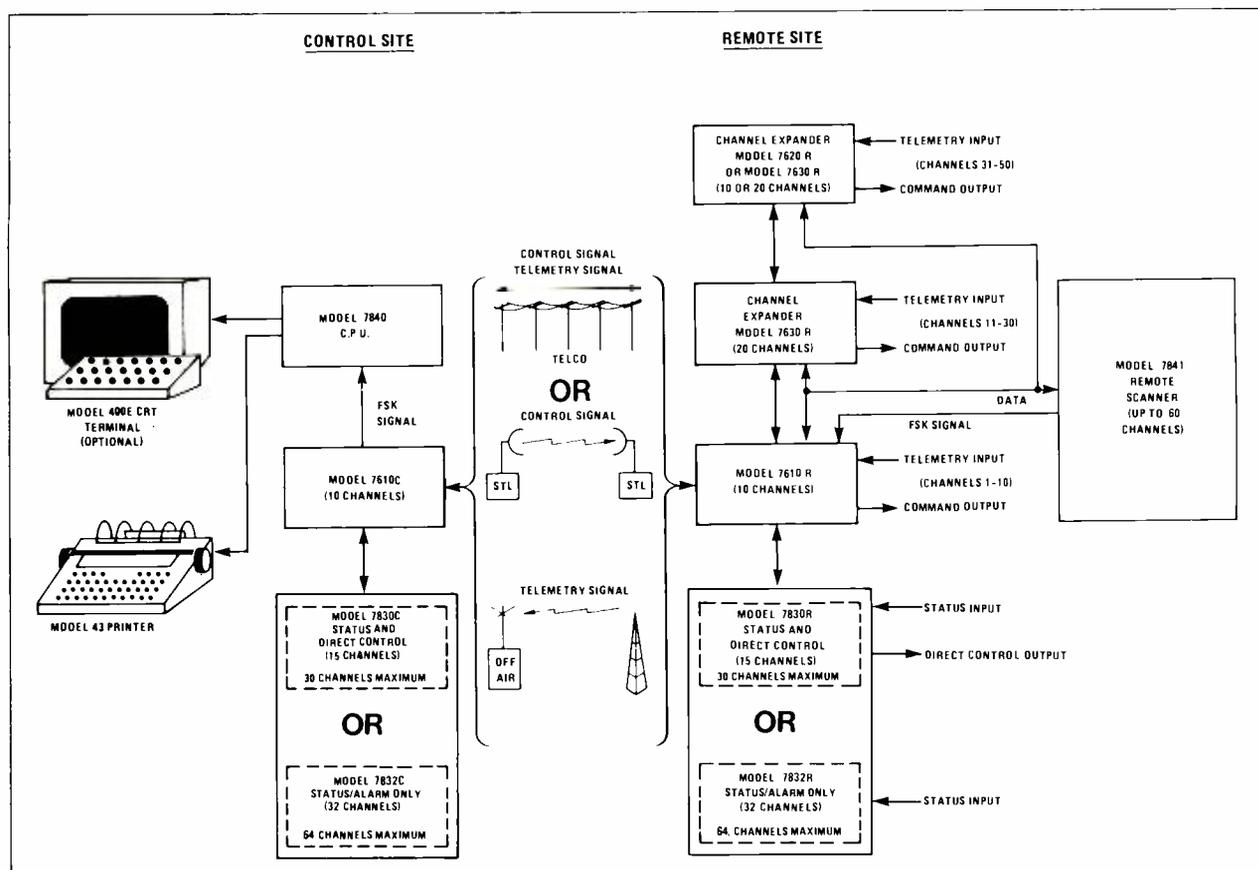

Model 7600 remote control system from Time & Frequency Technology uses digital pulse code modulated communications throughout with FSK keying. Digital data filtering sends each command twice, and they are compared bit by bit at remote point. Command is carried out only if they match completely

## Digital audio: it's here

The fact that the signal in the radio plant is still mostly in analog form is, in one sense, an anachronism. The digital tape machines are here, and even in their "first generation" form they have many splendid advantages for the radio broadcaster. But until very recently they have been far too expensive for general use by radio broadcasters. And there has been the feeling on the part of the broadcaster that super-quality like that of the digital audio machines is out of line and will be lost in the lower quality of the rest of the plant.

Both of these barriers to the use of digital audio are beginning to weaken. The Sony PCM-100 converter, which puts digital audio onto videotape machines, is aimed specifically at broadcasters, with a price around \$15,000. At this writing *BM/E* knows of only a few cases of extensive use of the PCM-100 by broadcasters; this is sure to expand quite rapidly because the logic of the machine for radio is very strong. What it is magnificently primed to do is record live concerts for later broadcast at super-quality levels. In the accompanying box we describe what some radio managements are doing with the system and how they feel about the results. We can say here that in general the use of a digital machine for live recording/tape broadcast does bring an improvement in signal quality that is most noticeable, and most welcome, to large sectors of the audience.

Another very recent item in the trend to lower pricing is the Mitsubishi X-80 series of two-channel digital re-


orders, 16-bit machines introduced at AES, with prices in the range of \$25,000 to \$30,000. Mitsubishi says they can be delivered immediately. The firm also promises a complete electronic editor and a *complete digital mixing console* "in a few months." The tape recorders seem to have excellent control arrangements which make them easy for analog-trained engineers to use. Here again is a machine that, on the face of it, could raise considerably the quality level of live recording for the broadcaster.

A number of other firms are adding force to the invasion of broadcasting by the digital tape recorder, as reported last month in *BM/E*'s account of the AES Convention. JVC, Pioneer, and Panasonic are a few more of the giants in the field with very active development work on digital tape units. JVC, for example, has converters somewhat like those of Sony for putting PCM audio onto videotape. What this all means is that digital tape recording is just on the verge of a fairly rapid expansion into radio broadcasting.

## Also getting close: digital storage

Predicted for some time as one of the great potentials of digital technology for radio has been the storage of short program material in digital form to give the broadcaster the accuracy, high quality and very fast random access that come with material in computer-type memories. Until very recently this seemed quite far in the future, largely because of the cost of memory devices capable of holding the quantities of information involved.

# OUR TAPE WILL IMPRESS YOU AS MUCH AS OUR SPECS

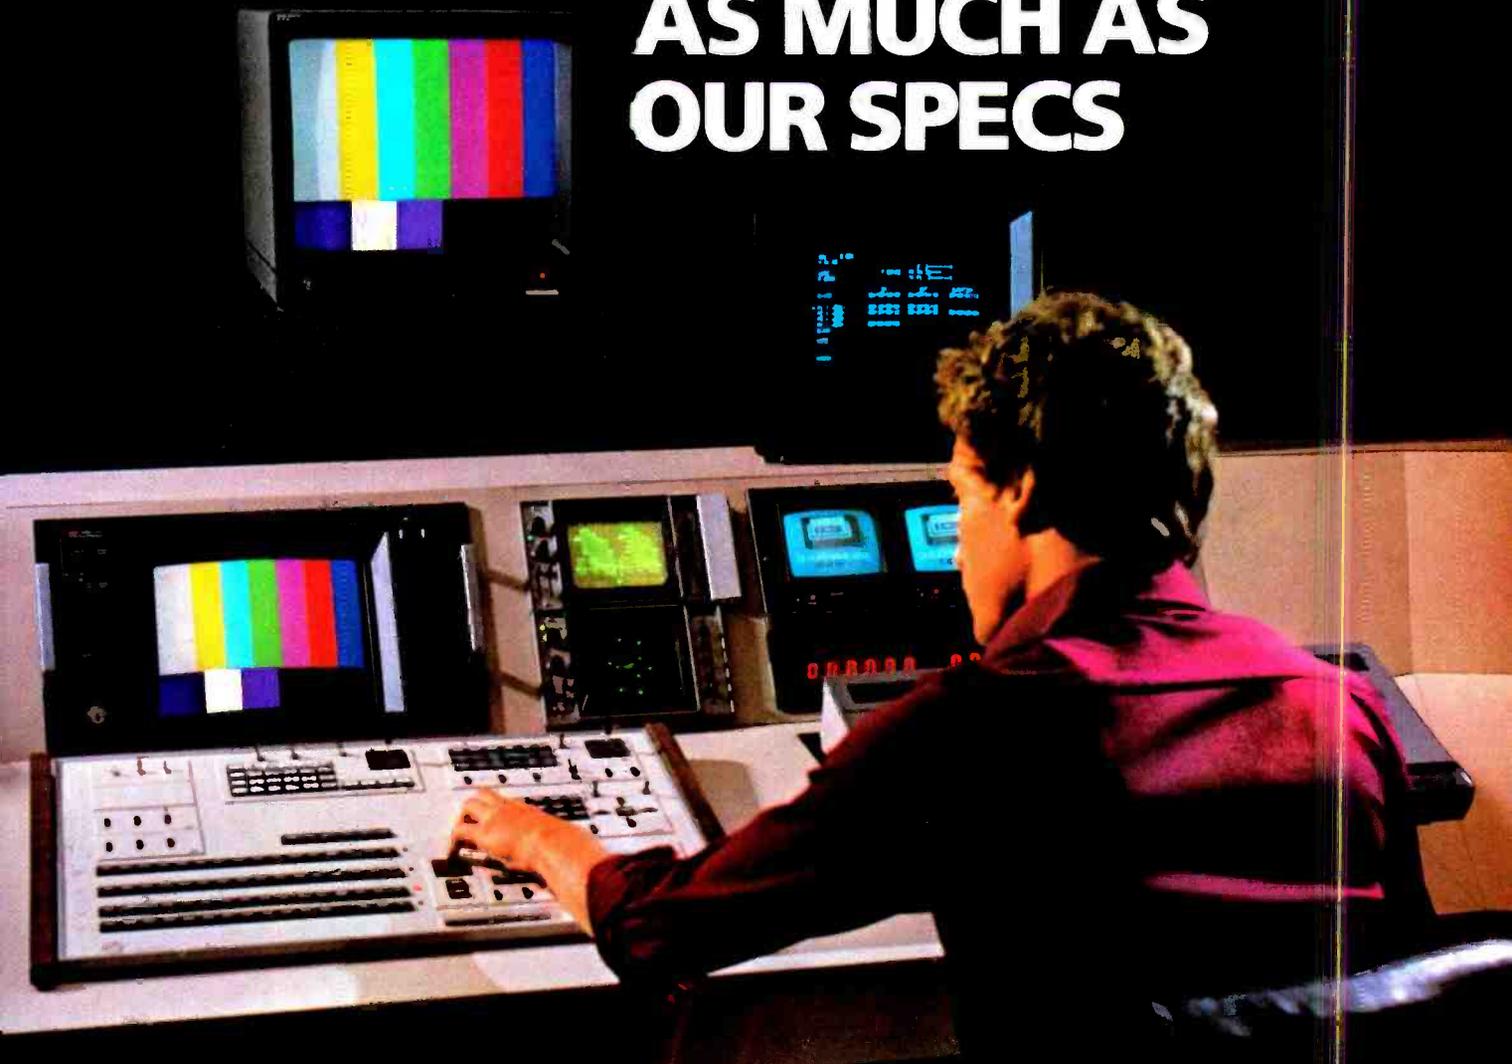

The two most important features of any videocassette are how *accurately* it reproduces original source material... and how *long* it will continue to do so. By these standards alone, Maxell's VHS, Beta and U-Matic videocassettes are clearly superior performers.

One of the prime reasons for this is our exclusive *Epitaxial™* video recording tape, which is formulated using a sophisticated technique of growing cobalt-ferrite particles onto a core of gamma-ferrite oxide. It is largely responsible for a tape with superior color, video and audio fidelity, with very low chroma noise and minimum head wear. Even repeated playback will not cause any critical loss of resolution.

Our cassette shells are made with the same quality and precision as the tape they house. So you can depend on Maxell for an outstanding performance every time. For every application.

But don't take *our* word for it. Our specs make things perfectly clear. Send for them today and get the whole picture for yourself.

Professional/Industrial Products, Maxell Corporation of America  
60 Oxford Drive, Moonachie, NJ 07074



**maxell**  
PROFESSIONAL  
INDUSTRIAL  
PRODUCTS

Circle 126 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# The Quantel DPE 5000.



## The digital effects system that will turn your head around.

Rotate it 360 degrees.

Manipulate it into an infinity of forms.

Flip it. Tumble it. Spin it.

But because not every broadcaster needs all these capabilities now, we've built the DPE 5000 to grow. Endlessly.

You can buy the basic single channel system and generate an array of optical quality digital effects. Infinite compression. Variable picture positioning. Freeze. Border generation. Position, size, and transition rate preselect. Horizontal and vertical squeeze. Key tracking.

Later, as your requirements change, you can add to your basic system.

Zoom expansion to four times picture size.

"No-Blank" noise reduction with blanking correction.

"Autosequence" effects recall system.

"Digiflip" flip, tumble, and spin.

"Autoflex" effects package for special shapes.

Picture rotation.

And up to four additional channels to give you effects on five pictures simultaneously.

All these options can be added to your basic DPE 5000 at any time. And this goes for *any* DPE 5000—all the way back to serial number 1. We want your digital effects system to grow, not become obsolete.

Even if you don't want your head turned around this year, who knows about next year?

Call your nearest MCI/Quantel representative. Or get in touch with us directly. Micro Consultants, Inc., P.O. Box 50810, Palo Alto, California 94303, 415/856-6226.



**MCI/QUANTEL**  
The digital video people.

MCI/Quantel, "No-Blank," "Autosequence," "Digiflip," and "Autoflex" are trademarks of Micro Consultants, Inc.

Circle 127 on Reader Service Card

## The Digital March Into Radio

But this technique, too, is now about to knock on the radio broadcaster's door. One early form is the Digiphon Model 450, announced last fall by EMT of Germany. The Digiphon uses an established magnetic disc system of Control Data Corp., the CDC BK 6 XX, with standard I/O interface plus electronics developed by EMT. The disc has a 300 million byte capacity, enough to hold about 35 minutes of digitized stereo signal recorded with 16-bit linear coding and with an elaborate error-correction scheme. EMT says average location time for any point on the disc is 50 ms, search accuracy 5 ms. RMS linear dynamic range is given as 80 dB. No price had been announced when this was written; deliveries are expected in spring, 1981.

Other systems using magnetic disc drives for this function are known to be in the works; it looks as though the breakthrough to storage of short program material in digital form is this year. With some 30, 40, or 50 commercials or 30-second shorts instantly available and in super-quality form on one small disc, the airing and storage of commercials will be transformed into much more efficient

### Digitally Recorded "Live" Music On The Radio Air: Some Firsts


The first series of concerts recorded live on digital audio tape machines and put on the air by a radio station were originated in the San Francisco Opera House and broadcast by local public station KQED over a three-month period in 1980. About 12 concerts got the digital treatment, including symphony concerts and opera performances covering a wide range of music.

KQED used the Sony PCM-100 converter to put digital audio onto videotape recorders. Both half-inch and 3/4-inch VTRs were tried and both performed excellently. The one problem that emerged came from a few awkward breaks when the 3/4-inch machine ran out of tape before a pause in the music occurred. Chief engineer Gene Zastrow told *BM/E* that the half-inch machine, with its longer playing time, solved this one for them. A better way, of course, would be to set up two machines, with the second one cued to start just before the first runs out.

KQED is one of the uplink stations for the National Public Radio satellite net. The concerts were fed to the net, and a large proportion of the affiliated stations broadcast them. There were numerous praises for the outstanding fidelity of the signal, both by the participating radio managements and by listeners. Zastrow called the audio quality "superb," saying he would buy digital recording equipment for constant use if and when his budget allowed it. The Sony equipment had been on loan to KQED for a demonstration of its effectiveness in just this function, which is sure to be one of the main motivations for the use of digital tape by radio stations.

Another on-air use of digital audio, this one for a television simulcast, took place on Christmas Day, 1980, at station KCET in Los Angeles. The program, "All That Brass," brought listeners and viewers the Modern Brass Quintet in pieces by Bach, Elliot Carter, Satie, and Scott Joplin. Again, the Sony PCM-100 was the digitizing unit. Jerry Zellinger, engineer, said it was chosen in part because it could be integrated quite easily into the station's video editing system.

Again, however, the outstanding finding of the users was *clarity*. "It just blows you away how clean the sound is," Zellinger said. The program went out in stereo on local FM station KPFK. Again, a number of listeners praised the audio quality, a tiny preview of the effects of wide use of digital tape machines in broadcasting, not too far in the future.

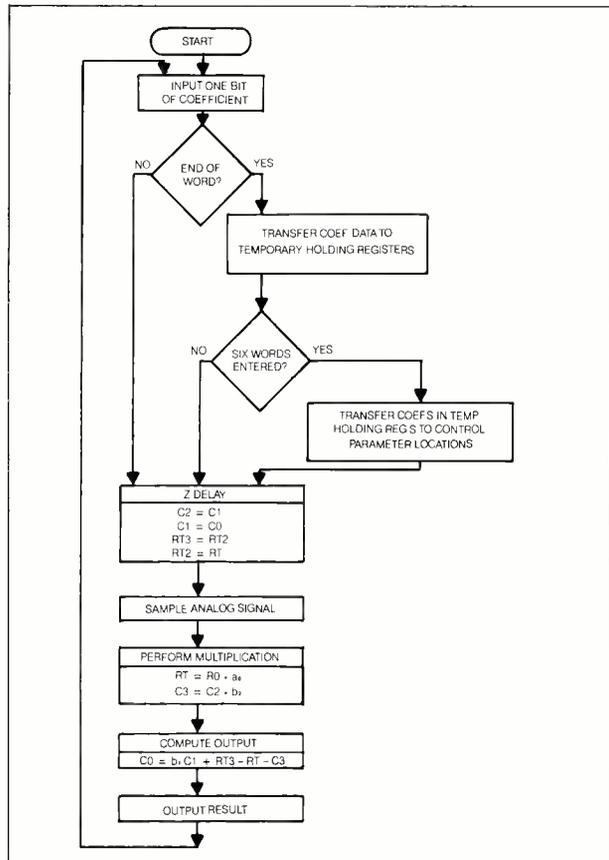

Flowchart for digital parametric equalization, presented at AES Convention by Jon Umhey, shows an early design for processing signals in digital form. Great flexibility and accuracy will come with digital processing

and accurate processes.

### Watch for the digital disc

The advance to the digital plant is getting plenty of shove from the developments described so far. That advance will get a very large shove, many observers now agree, when the digital audio disc becomes generally available. *BM/E* tentatively put forward this opinion in the October, 1979 issue; the course of events since then seems to have strengthened the importance of the digital disc in the future of digital radio.

The basic scenario was outlined for *BM/E* by Dick Dubbe, leader in digital development at 3M. The outlook is that not too long from now the digital disc will reach the consumer market on a large scale. The resulting leap in audio quality expectations of the consuming public will put heavy pressure on FM broadcasters, who will necessarily incorporate digital discs into their programming. Since they then will have excellent digital material on hand, the pressure will spread to extending digital handling to other plant functions, eventually to the whole plant.

Dubbe sees the role of the multi-track, recording-studio digital recorder as creating a body of recorded material that can be used for all forms of delivery to the consumer via radio or recording, with full maintenance of top mastering quality through all future digital developments. He reported that 3M (at the time of the interview) had delivered more than 40 of the multi-track machines to recording studios, so that the backlog of digital recordings is growing rapidly.

Both Dubbe and Jettner of Harris saw another potential in the digital disc (or in the technology that creates it):

# When your signal is your bread and butter...

## your transmitter should be McMartin.

When you depend on a product to provide your bread and butter signal, remember McMartin. Our transmitters are designed with you in mind. McMartin offers a complete AM-FM line with high-level plate modulation on all AM transmitters. We are the only manufacturer to provide a full five-year warranty on our FM exciter and its accessories.

All McMartin broadcast transmitters are conservatively designed with fewer parts for higher reliability and lower maintenance costs. The confidence of knowing that your signal is "on the air" everyday is OUR bread and butter. That's McMartin.

For the name of your District Sales Manager, call or write McMartin.

See our new 50 Kilowatt transmitter in operation at booth #300 at the NAB convention.


McMartin Industries, Inc. • 4500 South 76th Street • Omaha, Nebraska 68127 • Phone (402) 331-2000 • Telex 484485

Circle 128 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)



## The Digital March Into Radio

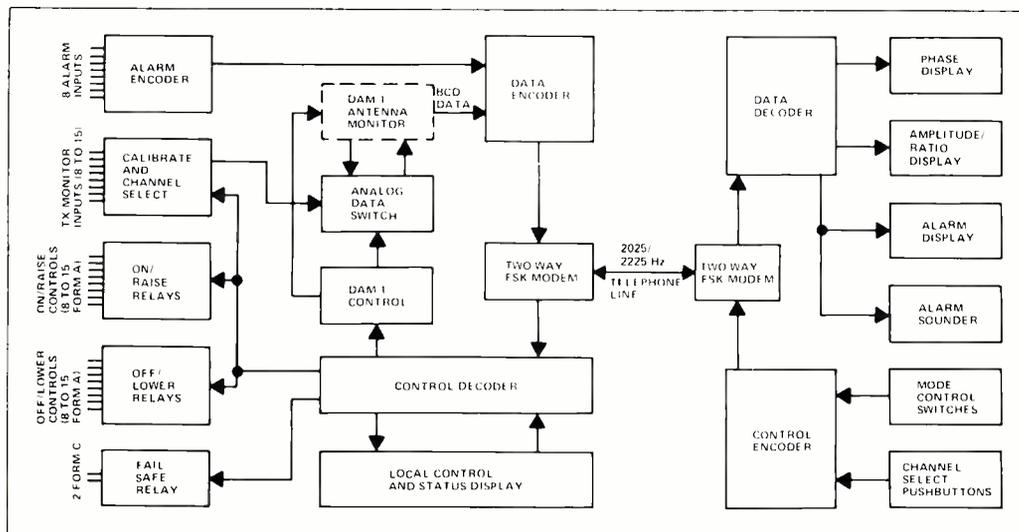

*Antenna/transmitter remote control system, TMCS-1 from Delta Electronics, converts analog readings at transmitter site to eight-bit "words" for easy handling on voice-grade lines and at control station*

it could be the medium for storing program material in radio automation systems. Again, there would be very large gains both in technical signal quality and in storage density. The disc will be available in small forms, probably from two inches up to six. As Jettner notes, storage of 1000 standard-length musical selections would take only a small fraction of the space now needed for a library of that size.

This automation and storage prospect is attractive because of the *very* fast random access capability of the digital disc and its long playing time. With at least a half-hour of music on each side, the playing time can be used for one long number or 10 to 12 standard-length pop numbers. The playback machinery could find any one of them in a few milliseconds. This potential of digital technology could clearly lift the quality of automated programming several levels higher than it generally is today. And again, it would mightily promote the advance to the computer-controlled plant.

### Disc choices are firming

Where does the industry stand on the digital disc now? As reported in earlier issues of this magazine, there have been three to four systems developed, each one incompatible with the others. But very recently the Japanese electronics industry, motivated by a vision of vast market potential, has moved toward standardization. At this writing a committee set up for the purpose had apparently come down to two systems, the laser-played Philips Compact Disc (already supported by Sony and Pioneer), and the JVC capacitance system. It is unclear as yet what the practical effects of this will be; a spokesman at Philips told *BM/E* that the Compact Disc would be marketed early in 1983 in any case.

Meanwhile, in December Teldec demonstrated in New York its proposed Mini-Disk, "a contribution to the digital audio disk standard," which the firm said could easily be compatible with the capacitance-type disc. The Teldec disc uses a piezo-electric (pressure-operated) pick-up riding a vertically modulated track, with about 10,000 tracks laid down on each inch. Teldec has simplified the production process by cutting the master disc directly into a copper plate from which stampers are made. The claim is that the system would be much less expensive and

less subject to error than the laser system.

However the choices are finally made, we can be certain that the digital disc in one form or another (and probably at least two) will be marketed widely in a couple of years. Its effects on the high fidelity industry and on radio broadcasting will be enormous.

### What will it be like?

Through this article are a number of suggestions as to what the mostly digital plant will be like when it finally arrives. There will be a concentration of control in a "main" computer, with many individual units having their own microprocessors for programmable local action. Computer control will be very much faster and more accurate than operator control in most of the main functions, and will save money by speeding action and eliminating errors while giving the broadcaster many new kinds of action for his choice.

The signal will have far higher quality than it often does now, and processing it will be much more accurate and flexible. The density of storage for commercials and program material will rise by at least an order of magnitude. Recording of live concerts will enter a new era of transparent audio quality.

### Beyond the transmitter

That takes the digital signal right up to the transmitter, where a D-A converter will be needed to get the signal on the air. Can we take a digital signal any further? The Philips research lab in Holland is experimenting with an all-digital FM transmission system that puts a digital signal onto the FM carrier and does not convert it back to analog form until it gets to the output of the receiver. Some tryout broadcasts are underway with the help of the Dutch Broadcasting System; detailed results are not yet released.



There are a number of large difficulties in the way of anything like this in American broadcasting. Obviously, it takes more bandwidth than analog FM, and in this country the available spectrum is already sliced as thin as we can get it so that a lot of different people can each have a piece. But with as weighty an organization as Philips actively pursuing the idea, we may hope that a decade or two down the road it will reach us. Noise in radio? Gone! Distortion in radio? Gone! It's worth hoping for. **BM/E**

# YOU CAN IDENTIFY WITH QSI

Fast television source identification  
with these two new units from QSI.

## CB-7200 Color Bar Identifier

This versatile signal generator will originate and identify television sources with 8 on board programmable video characters superimposed on standard EIA colorbars. A 1000 Hz tone is provided, plus adjustable gain microphone input.

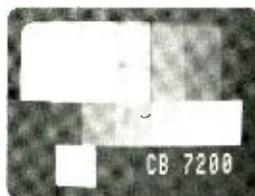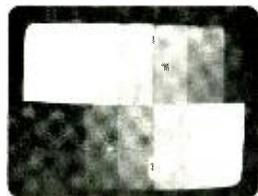


## CB-7200

- EIA color sync generator and split field color bars.
- 64 character ASCII code set.
- 19" x 1 3/4" rack mountable
- Extensive half field, reverse, black burst and field indexing functions
- Audio and video bypass.

## VSID-81 Video Source Identifier

Loop your video signal through the VSID-81 and add up to 8 of the 64 ASCII alphanumeric matrix characters. You can locate the character group in various sizes at any active or vertical blanking interval.

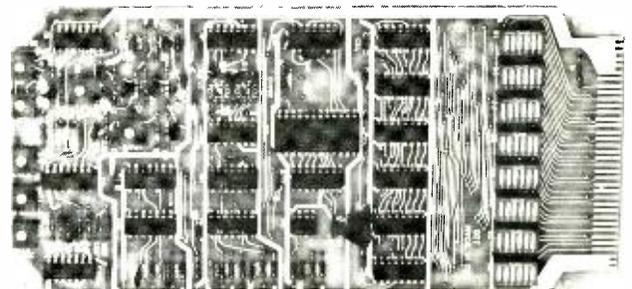

## VSID-81

- On board programming for rapid character changes
- Single board, or up to 16 units in 5 1/4" of rack space.

**QSI** systems, inc.

For more information on CB-7200 or VSID-81, or on QSI System's full line of broadcast equipment, call or write: QSI Systems, Inc., 993 Watertown St., West Newton, MA 02165  
Phone: (617) 969-7118

Circle 129 on Reader Service Card



**MOVING FROM  
HERE TO DIGITAL**

# **MACHINE CONTROL AT KPIX: CORNERSTONE TO DIGITAL**

By Merrill Weiss

**When a television station takes comprehensive control of its equipment inventory, it crosses over into the fundamental stages of the digital plant. Control moves from the mechanical age to the age of information in which what a machine does is more important than where the machine does it.**

“READY TO TAKE two direct . . . take it! Ready to roll framestore two . . .”

Roll framestore two?

Almost anyone can roll a VTR or a film projector or, for that matter, an ENG truck, but KPIX technical directors have been “rolling framestores” every night since the station’s digital machine control system went on line in February 1980. This first-of-its-kind system has moved KPIX one step closer to total automation.

For those who are considering methods to improve efficiency—especially in a new plant—herewith is a case history of the new machine control installation at KPIX: how we identified the need, designed the system, and selected a vendor; and how we got the vendor to build a system based on the requirements of the station in terms of existing equipment and labor agreements.

The opportunity for installing the system came with the realization that our old facility, which was built in 1950, could not be remodeled or expanded to keep pace with the station’s growth. Not that you could fault the original architects, whose contingency plans even included turning the whole place into a parking garage (nobody was sure that TV would last in those days), but the structure wouldn’t stand more stories, and adjacent residential property was not available. Well, the station thrived, the parking situation in San Francisco got that much worse, and the search was on for a new building.

At least partially because the FCC requires in-city studios, a large five-story structure on the east side of town emerged as the best candidate. From the top two floors, the building afforded an outstanding view of the Bay Bridge—a view not likely to be blocked since most of San Francisco’s “movers and shakers” happen to live next door on Telegraph Hill. While this arrangement was radically out of step with the “drive-in” studio tradition, a ground floor studio was not considered necessary in today’s field production environment. (See “KPIX-TV Raises High The Roof Beams,” *BM/E*, June, 1979.)

While there is certainly nothing novel about controlling VTRs and film chains from remote locations, the



*Machine control panel, Grass Valley switcher, and Vital SqueezeZoom in news studio control room at KPIX*

“machine control” concept allows a single panel to address more than one machine. It also means that a given machine can be operated easily from more than one location in the building.


In fact, our old plant was equipped with a hard-wired, dual-location, start/stop only remote control system operated by the “switcher,” a term used at KPIX to describe the production switcher operator. By the terms of our IBEW contract, this was a technical—which is to say union—position. So we already had control room personnel with the credentials to run every machine in the building. If now we could get the right pushbuttons in front of our switchers, they would have split-second control of tapes and films, our VTR/telecine operators would be released for duties other than standing by for roll cues, and our viewers would be less likely to wonder when (or if) an ENG segment that had just been introduced would appear.

Presented with these immediate advantages, as well as the long-range prospect of comprehensive automation, we were encouraged to investigate a multi-machine, multi-location control system. We considered the possibility of building a hard-wired system similar to the one in our old building, and had budgeted some funds for parts, but we quickly encountered several basic obsta-

**Merrill Weiss** is assistant engineering manager for KPIX Television, San Francisco, Group W, Westinghouse Broadcasting Co.

# Machine Control At KPIX

Fig. 1. TCS-1 machine control system. The center of the diagram illustrates the eight-bus wiring concept

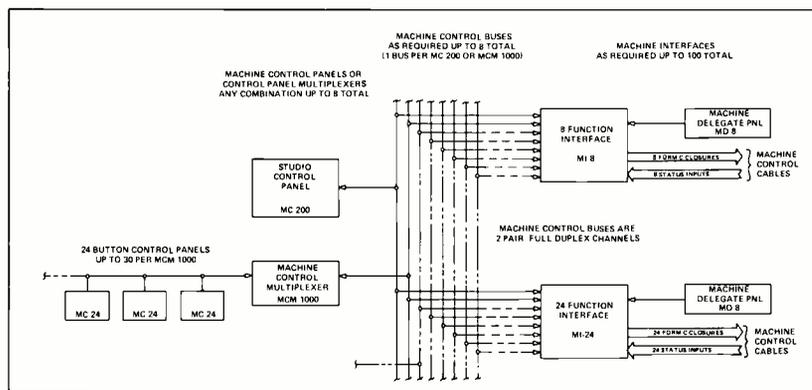

cles. First, every additional machine function (fast forward, rewind, record, etc.) would have meant pulling another length of copper wire through the building. Secondly, for every machine we wanted to control, we would have to stake out another parcel of pushbutton territory on the switcher's console. Finally, even the most dedicated multi-conductor cable/mechanical relay enthusiast would be hard pressed to switch hard-wired control between more than a couple remote locations—which is exactly what we needed in order to reduce the back-and-forth movement of our tape room people and to allow us to produce any show from any control room.

We wanted a machine control system that would reduce on-air miscues and tighten up the timing of our news shows, allow our tape operators to get more work done in less time, and even allow us to usher a production crew from a broken control room to an OK control room on a moment's notice. We were convinced that a totally new microprocessor-based digital control system would be required to achieve these goals.

## Going from fiction to fact and affording it

Well, fine. But did such a system exist? And if it did, could we afford it?

As to the first question, the answer seemed to be... not really. As to the second, we decided that if we could buy a machine control system *and* a distribution switcher for the amount of money already budgeted for the new distribution switcher plus the small amount budgeted for machine control parts, we would add the machine control system.

Fortunately, we soon discovered that the distribution switcher budget was somewhat on the high side, and this gave us reason to hope that, if we could find a good switcher at a reasonable price, we could make, or convince someone to build, the machine control system too.

One area of special concern to us was the audio output capability of the switcher, in terms of output impedance and output level. We knew we would be faced with long cable runs (400 to 500 feet or about 1000 feet on a round trip) which in a traditional matching (600  $\Omega$  output impedance/600  $\Omega$  input impedance) audio system would result in something like a 10 dB loss at 20 kHz. The answer here was to find a switcher with an output impedance much lower than the usual 600  $\Omega$ —something on the order of 80  $\Omega$  or less, the same as we were using for the rest of our audio distribution system. Such a switcher would then fit in perfectly with a low output/very high


input impedance audio system that would reduce the high frequency loss to about 2 dB at 20 kHz and also allow us to bridge as many inputs as we wanted across a given output. Along with a low output impedance, we wanted a switcher with plenty of headroom protection—about 20 dB above our standard operating level of +8 dBm—before hitting a clip point of +28 dBm. We also wanted to eliminate transformers, if at all possible, in order to reduce low-frequency distortion and permit better phase response.

We then proceeded with a parallel research study on six different manufacturers' switchers in terms of technical characteristics and cost. In our estimation, the switcher with the best price/performance ratio was the TeleMation (now Fernseh Inc.) TVS/TAS-1000. There were a couple that were better priced but with somewhat lower performance; there were a couple that had similar performance but were more expensive, but there were none that had overall better performance, in our opinion. The TVS/TAS-1000 had an audio output impedance of 10  $\Omega$ , which was well within the 80  $\Omega$  number that we wanted, and it had a 26 dBm audio output level which, while not quite making the 20 dB headroom that we were after, was better than anything else available with a transformerless design. Furthermore, the price gave us enough room to pursue our machine control idea.

As anyone who has attempted this sort of comparison knows, it involves more than just sending for the spec sheets and drawing up a matrix. Many phone calls to the manufacturers involved were required, either to get a particular specification or to find out how a measurement was made. In some cases, we went to the factory to take the measurements ourselves.

During one such trip to Fernseh's plant in Salt Lake City, we discovered a problem with the TVS/TAS-1000: the audio amplifiers, when greatly overdriven, were folding back rather than cleanly clipping the signal. We brought this to the attention of Fernseh's design engineers, and, as we worked to locate the source of the distortion (it turned out to be an op-amp which was ultimately replaced with another component), we began conversations on the subject of machine control. We presented an overall system design, including the number of inputs and outputs, system architecture, communications scheme, and operational features. Fernseh's engineers indicated that it would be feasible for them to design the hardware and develop the software necessary to implement our concept. These ideas then were pre-

# Look into a JVC 3/4" TapeHandler. Now.

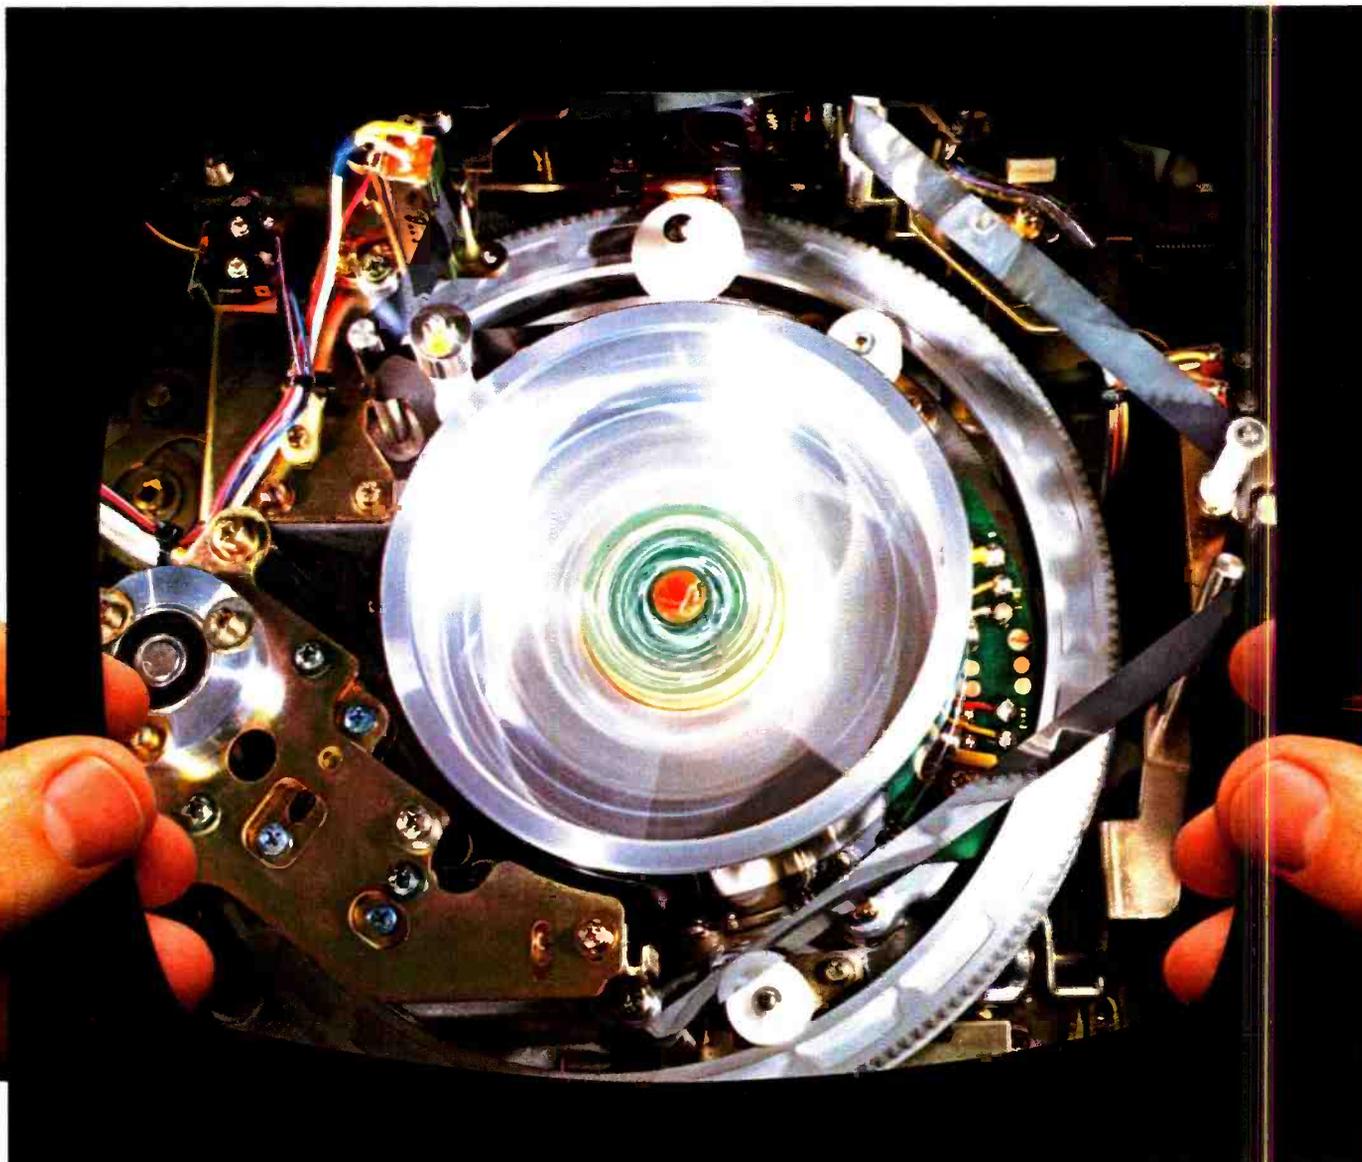

**JVC has taken a close look at 3/4" Video Cassette Recording with an eye for what you've been looking for. Stability. Reliability. Gentle tape handling. Economy. The result is a full line of recorder/editors, full-function recorders, cost-efficient players, and microprocessor-based remote control units with utmost versatility, broad interfacing capability.**

Take a look inside one of JVC's Tape-Handlers...the CR-8200U Recorder Editor, the CR-6600U full-function Recorder with assemble-editing capability, or the CP-5500U Player with on-air quality...and you'll be amazed at what you don't see.


No pulleys. No belts. No idlers. Instead, a 7-motor direct drive system that keeps tape tension constant for smooth and reliable tape transport, reliable tape shuttling. A simplified tape threading mechanism for gentle tape handling. Brushless DC motors that directly drive the capstan, head drum, and reels to give stability and reliability.

To go with them, there's a choice of compact control units: the easy-to-operate RM-88U Editing Controller for precise timing of machine functions, the low-cost RM-82U Editing Controller, and the RM-70U

US JVC Corp. Dept. 41 Slater Drive, Elmwood Park, NJ 07407 **BM/E 2/81**

- Please have a representative call  
 I don't want to talk yet. Just send literature.

Name \_\_\_\_\_  
 Title \_\_\_\_\_  
 Company \_\_\_\_\_  
 City \_\_\_\_\_  
 State \_\_\_\_\_ Zip \_\_\_\_\_  
 Phone \_\_\_\_\_

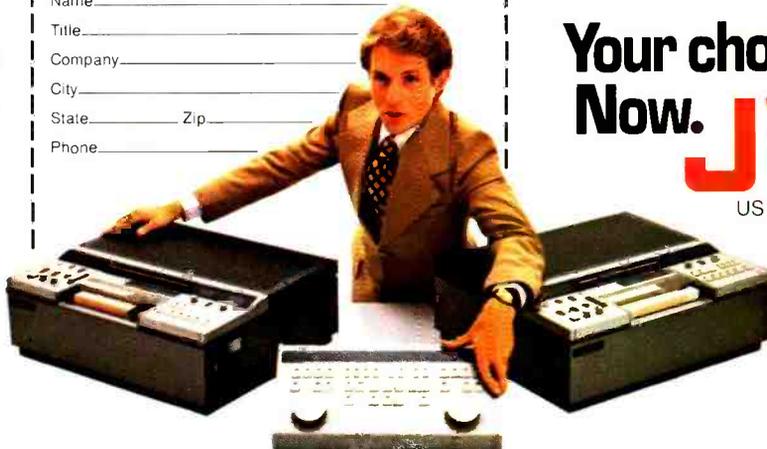

full remote control unit with shuttle search function.

Get all the details. Send in the coupon, **phone toll-free 800-821-7300, Ext. 7005** (In Missouri: 800-892-7655, Ext. 7005).



**Your choice.  
 Now. JVC®**  
 US JVC CORP.

Circle 130 on Reader Service Card

## Machine Control At KPIX

Fig. 3 (right). "Studio" type machine control panel, with three film chain pushbutton groups and four thumbwheel-selectable VTR pushbutton groups. Gang start button (center, right) is enabled by small toggle switches

Fig. 2 (below). Typical VTR room control cluster. Note machine select thumbwheels and external start toggle switches

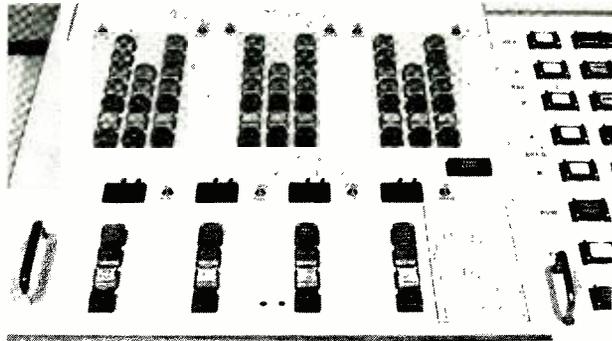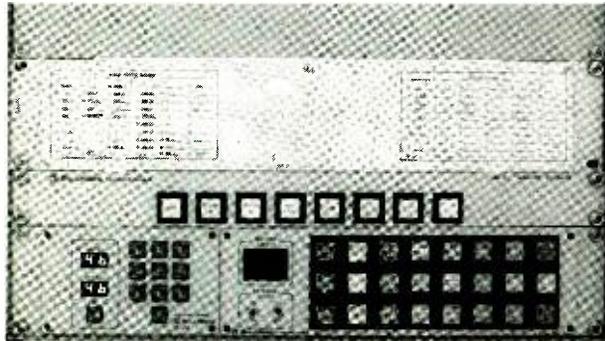

sented to Fernseh's management, who agreed on a price for a routing switcher and machine control system package. It was understood that Fernseh would have the eventual right to place the system on the market as a standard product.

During these meetings, we developed specific design objectives in terms of machine interfaces, number and type of control buses, and remote control configurations (Fig. 1). We wanted to be able to control any combination of up to 100 film chains and VTRs, generally using a 24-function interface for film islands and an eight-function interface for VTRs, although there should be nothing to preclude the system's being configured differently when it might be advantageous to do so. We felt that each interface should consist of a control section for sending operating commands to the machine and a status section for reporting (via lamp illumination) what mode the machine is in. Because of the wide variety of remote control schemes existing in machines, it seemed apparent that the control section should be able to handle anything from dry circuit switching to two amps at 120 Vac. Some familiar examples of the variety a station engineer might encounter include older VTRs with 24 V dc relays, newer VTRs with 5 V logic level control, and on up to 120 Vac relays in older model audio recorders.

In a further effort to make the interfaces as universal and reliable as possible, we specified bifurcated, DPDT (double pull, double throw) relay contacts with both poles connected in parallel. This would provide four contacts in parallel in an SPDT (single pull, double throw) arrangement so that the same relay could be used for a "normally open" or "normally closed" function. For reliability, all contacts were to be gold plated.

For the status section of the machine interface, we wanted an optically coupled bridging device that would permit operation from 5 to 30 V without modification, and up to 120 V with a change of only one resistor. The status section was to be able to work with ac or dc and, in the case of dc, with either polarity. Optical coupling was selected in order to provide complete voltage isolation, and increased reliability.

As to the number and type of control buses, we en-

countered a much broader range of design possibilities. A single-coax control bus—perhaps the most obvious approach—would reduce wiring costs to near minimum. However, we opted for the additional speed and reliability of an eight-bus distributed processing system that would allow each bus to operate independently (Fig. 1). Since one of our original objectives was to provide more precise timing of machine starts to our switcher operator, the last thing we wanted was a system that might become sluggish during periods of heavy use because of too much data trying to get in and out of one CPU through one coax line. With a multiple bus approach, we could actually run the data on each bus at a slower rate—which would mean more reliable communication and less expensive components—and still end up with a faster overall system than one using a single control bus. Beyond the speed advantage, the multiple bus/distributed processing concept would also mean that if one bus failed we could simply switch to another, and no single equipment failure could put more than that one device out of service.

Each of the buses was to be two balanced, differential data links (based on EIA Standard RS-422 for this type of interface), which meant two audio-type pairs per bus: one pair for control, one pair for status. This was another speed consideration, since it would allow status data to start coming back as soon as a machine was addressed. The buses were to be constructed in a closed-loop configuration so that they could be opened for adding equipment or for maintenance while the system continued to operate. Furthermore, any open cable would have no effect on system operation.

The eight-bus approach lent itself to a very straightforward delegation system, since we could wire each bus to a single control room. We would then place a simple eight-button panel next to each machine so that the operator could press "Studio N" to delegate control to the north studio, "Post Prod" for the post-production control room, and so on. Each of our control rooms would in turn be equipped with a control panel able to address (via leverwheels) and operate up to three film islands and four VTRs simultaneously. These "studio" control panels would also have a "gang start enable" toggle switch

Simply fantastic picture quality. Fantastically simple set-up. Get both with our renowned TK-47.

Press a button, and it sets up automatically. In seconds, instead of hours. File and recall six basic lighting situations, and get great picture quality—instantly—under any conditions.

All RCA cameras are built to extend your creativity, lighten your chores, and deliver the very best on-air product.

Our TK-86 is light, rugged and agile enough to go anywhere and start shooting right away.

Our TK-760 has enough heft for smooth studio work, yet is light enough for easy transport to the field as an EFP camera.

And with them all comes famous RCA TechAlert service to keep you on the air, come what may. Your RCA Representative can tell you more. RCA Broadcast Systems, Building 2-2, Camden, N.J. 08102.

# SIMPLY FANTASTIC.



# Collins SVR-4 receivers go to extremes: Reliability way up. Price way down.

All three of our new low-priced SVR-4 satellite video receivers have features in common — plus reliability that's very uncommon. (Write us and we'll send you our test results: 30,000 hours mean time between failures.)

All three receivers are designed for reliable wide-band video carrier reception from international and domestic C-band satellites. All are EIA RS-250B and CCIR Rec. AA compatible; have two video outputs plus composite video and subcarrier output; and have three standard audio subcarrier frequencies.

They also share these features:

- A threshold extension technique that improves audio and video performance when operating with a low carrier-to-noise (8.0 dB C/N).
- Alarm circuits that monitor the audio subcarrier, video, and RF level. A summary alarm contact closure, as well as front panel LED indicators. Internal logic prevents a summary alarm for a loss of uplink modulation.


**SVR-4A-1**, our frequency agile 24-channel receiver, is our most versatile model. It has a front panel local channel selector and a rear chassis BCD interface for remote selection. Channel designation matches the RCA satellite frequency plan. Odd numbered channels match the 12-channel frequency plan.

**SVR-4T-1** is manually tunable for continuous operation over the total 3.7- to 4.2-GHz frequency band. Tuning is provided by a front panel knob with channel indicator.

**SVR-4F**, our low-cost single-channel receiver, can be retuned to any channel in the field — without special tools or test equipment.

Backed by Rockwell's warranty and service, these receivers are available for quick delivery.

For further information, contact the Collins Transmission Systems Division, Rockwell International, Dallas, Texas 75207. Phone: 214/996-5340.

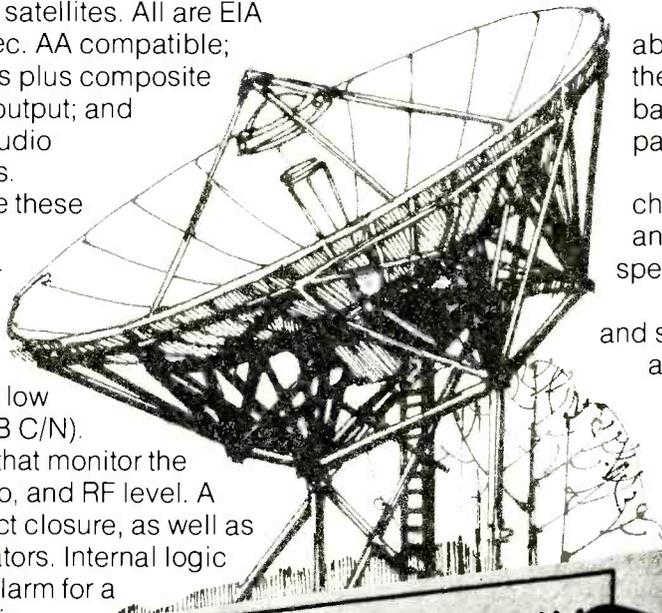

...where science gets down to business

Atlanta, Ga. (404) 979-0888 • Denver, Colo. (303) 978-9600 • Galion, Ohio (419) 468-3964 • Independence, Mo. (816) 737-3033 • Minneapolis, Minn. (612) 835-4989  
Redwood City, Calif. (415) 365-3364 • Rock Hill, S.C. (803) 366-7428 • Killingworth, Conn. (203) 663-2571 • Tallahassee, Fla. (904) 877-2580 • Arlington, Va. (703) 685-2661

**Rockwell has the latest words in communications: Collins systems.**

Brussels 242-4048 • Cairo 894531 • Frankfurt (0) 6106-4093 • Hong Kong 5-274-321 • Kuala Lumpur 27283 • London 01-759-9911 • Manila 818-6689 • Mexico City (905) 533-1846  
Melbourne (Lilydale) (03) 726-0766 • Paris (Rungis Cedex) 687-31-02 • Rio de Janeiro 286-8296 • Riyadh 69060 • Rome (0) 6-862-415 • Seoul 74-9276  
Tokyo 478-1278 or 478-1279 • Toronto (416) 757-1101 • Jeddah 54600

## Machine Control At KPIX

adjacent to the button group for each machine. All machines so enabled could then be started at once.

Satisfied that these design objectives would give our switcher operator quick and reliable control of any machine in the station, we then considered another of our basic concepts: increased efficiency of personnel in the VTR/telecine area. Since we wanted one operator to be able to run any machine in the room from any other position, we would need a 24-function control panel adjacent to each machine. To make matters easy for the machine operator, we decided to assign each of these "single-machine" control panels to the same data bus via a "control multiplexer." Once a given machine had been delegated to the "VTR" (machine room) bus, that machine could then be operated from anywhere in the area.

As a further refinement, we wanted our tape operators to be able to use the machine control system to simplify the process of dubbing commercials from two-inch reels and 16 mm film to our ACR-25 cart machine. After loading and cueing the play machine, we wanted the operator to be able to throw an "external start" toggle switch on the remote control panel associated with that machine. Since the ACR-25 generates an external start pulse whenever it is placed in the record mode, our idea was to simply route this pulse via the machine control system to the play machine to assure perfect program cueing on the finished cart. This technique could also be applied to our AVR-3s, VR-2000, and film projectors, allowing the operator to start more than one machine with the push of a single button during dubbing, transfers, or editing.

While all of these design objectives were developed to meet the requirements of the KPIX system, the hardware and software engineers at Fernseh had to remain mindful of the eventual use of the system at other stations. For example, the system has been modified since our installation at KPIX to accept variable speed controls for VTRs—a feature that we did not require. To explain how this was possible, I must digress for a brief discussion of the system's communication architecture.

### Software concerns

As I said earlier, the system uses a distributed processing approach, and in fact has a separate microcomputer in every box—machine interfaces, control panels, and multiplexers—a total of 31 CPUs in the current configuration. The microprocessor used exclusively in the system is a 6502—a 40-pin, multi-source IC selected primarily because of its "pipeline" design, which provides simultaneous execution of the last instruction and fetch of the next instruction, and its "memory-mapped I/O" technique, which makes I/O-intensive applications such as this much more efficient. Each 6502 talks on a 40-conductor ribbon-type data bus to a 256-byte RAM and, depending on the size of the program needed at that location, either a 1 or 2 kilobyte EPROM. The EPROM, being reprogrammable, is a key element in the overall flexibility of the system.

For example, on the eight-button machine delegate panel, we originally intended the first button to be labelled "OFF," so that by pushing this button the machine would be assigned to a bus with no controller. This left only seven other buttons, meaning that we really had

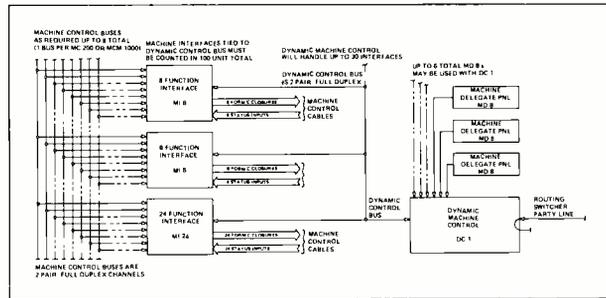


Fig. 4. Dynamic machine selection system (optional add-on for TCS-1 system) showing routing switcher party line connection at right

access to only seven buses, not eight. We finally decided that we wanted eight buses more than we wanted an "off" switch, and modified the software so that pushing a delegate button once would put the machine on the bus, and pushing the same button again would take it off.

Additional devices on the internal ribbon wire bus vary according to the purpose of the box. Machine interfaces, for example, have one eight-function relay interface board if they're talking to VTRs, or three eight-function relay interface boards if they're connected to film chains.

Terminating the internal data bus is what we refer to as an "eight by 422" board. This is an eight-port RS-422 multiplexer that electrically connects the individual box simultaneously to all eight machine control buses that run through the plant and selects one of them for communication with the microprocessor.

The machine control buses operate on a bit-per-function protocol in which one control relay is operated by turning on one bit, two relays by turning on two bits, and so on. The same is true for the status data.

With this approach, you can look at the data stream and see the bit toggle up and down as the relay goes on and off, or as the light goes on and off in the case of a status function. This means you can have an infinitely long control word: the first byte being the address, the second being the length of the message to follow, and, in the case of an eight-function interface, two bytes of message. For 24-function interfaces, there are four bytes of message. But if more bits are required—as it developed in the case of the variable speed control—you can simply change the message length byte and tack on the additional data.

We also tried to keep the system flexible in terms of packaging, even to the extent to having some of Fernseh's mechanical designers visit the station. As a result, the system has three basic mechanical formats. The first is a 1½-inch rack-mount package used for delegate panels (MD-8), eight-function machine interfaces (MI-8), and machine control multiplexers (MCM-1000). (Twenty-four-function interfaces utilize a 3½-inch high version of this package.) The second is a 3½-inch rack frame, which can be thought of as three units wide. A single-machine control panel (MC-24) takes up two of the three units, leaving one unit for whatever other control may be required. In our case, we asked Fernseh to invent a 10-key, single-bus routing switcher control that would fit in that space. (This turned out to be the CP-1200A.) For those wanting variable speed control for VTRs, the space can be used just as easily for a shuttle knob. Where necessary, the 3½-inch frame can also be used to mount

---

## Machine Control At KPIX

---

three CP-1200As.

Drawing from rack-mount packages, we then assembled a basic control “cluster” for each machine (Fig. 2) consisting of one MD-8 machine delegate panel, one 3½-inch rack frame (containing an MC-24 single machine control panel and CP-1200A switcher control for selecting the input to the VTR), and a printed directory of video/audio sources and machine numbers.

The remaining mechanical format in the system is the MC-200 studio control panel (Fig. 3), which at 19 inches high by 17 inches wide was designed to fit alongside our Grass Valley production switchers.

Here again, we felt that our particular arrangement might not be everyone’s cup of tea, so each button group on the MC-200 was mounted on a separate PC board to facilitate other layouts, including different control functions and overall dimensions. Other mechanical details, such as pushbutton type, paint color, etc., were specified to match our Grass Valley equipment.

The system was installed and operating in time to meet our “drop dead” air date of February 22, 1980, and has been on line since then. But even after we were on the air, we had a few more things to learn.

For instance, it turned out that RS-422, which, of course, is a basic element in the system design, does not specifically refer to tri-state data systems, and we didn’t realize that this was really the source of what seemed to be a noise problem. What we saw was random illumination of the status lights—which was a little disconcerting to

the operators, to say the least.

The EIA RS-422 standard, which specifies such things as voltage and impedance, is commonly used in data communications systems. At the same time, the tri-state (high/low/high impedance) concept is often used when more than one line driver needs to talk on the same bus. This is exactly what happens when two machine interfaces try to send status to the same studio control panel—a very common requirement. Since they both can’t send status simultaneously without causing a short circuit, there has to be a certain amount of cooperation so that only one line driver is talking at a time. This is conventionally done, in this as in many other systems, by having the first line driver sign off by “disappearing,” that is, by bringing the bus to a high impedance state. With the bus thus released, another send can start talking, and so on.

The problem was easily corrected—we just modified the line release procedure in software to make the system more noise immune, then terminated the buses with hardware for extra noise protection. First we had to figure out that we were trying to marry two standards that hadn’t really been properly introduced.

In spite of our efforts to keep the system as flexible as possible, there remains one feature that doesn’t lend itself to every application—dynamic machine selection (Fig. 4). This is an idea that works only if you happen to have a TVS/TAS-1000 distribution switcher in your building.

As part of our system, we wanted to build two U-Matic playback stations, each consisting of four ¾-inch VTRs connected through a small routing switcher to two ADDA VW-1 frame synchronizers. The main uses of



# The next best thing to the real thing

Scotch® is a registered trademark of 3M

these systems are on-air playback of ENG tapes and real-time post-production of EFP programming, such as *Evening Magazine*. For the sake of economy, it made sense for us to share the four frame synchronizers among the eight U-Matics. But with respect to tight on-air work, it added a potential booby-trap. The production switcher operator might very well be told to "take your video on frame synchronizer 1" and "roll your tape on U-Matic 3." Since we were building two identical playback stations it made the situation even more confusing.

It seemed to us that the switcher operator should have to remember only *one* number for video and machine control, and that number should be that of the frame synchronizer. The way to achieve this was to have the routing switcher talk to the machine control system.

First, the VTR operator loads, say, U-Matic 3 and switches it into frame synchronizer 1. By using an MD-8 delegate panel, the operator then delegates control of the "frame synchronizer" to the production switcher operator. The MD-8 panel is connected to a box called a dynamic machine selector, which in turn is connected to the party line of the routing switcher. Through the party line connection, the machine control system will dynamically select for operation whatever VTR happens to be switched into, as in this example, frame synchronizer 1.

Now, the VTR operator can call to the switcher operator, "take your tape on frame synchronizer 1," which in the shorthand of production jargon becomes "standby to roll framestore 1." The switcher operator punches up framestore 1, addresses framestore 1 on the machine control panel, and hits PLAY. He or she really has no idea which machine is playing the tape, and doesn't much

care.


One potential for future applications of the system arises from the provisions which had to be made to permit dynamic machine selection. The dynamic control bus (see Fig. 4) could easily be run throughout the plant to permit control by a central assignment computer. As it stands now, the communications bus to be used and the address to be accepted by each machine interface can be communicated over this dynamic control bus. Additional functions could be incorporated by some minor software changes. While not necessary for KPIX at this time, these capabilities lend themselves to higher levels of control and automation in larger station, production house, and network operations.

For the meantime, we are well satisfied that we have realized our original objectives in terms of news production and machine room operations, both of which have achieved a greatly improved level of accuracy and efficiency. The system has also proven to be extremely easy to change and expand. What we do with it next, only time and our imaginations will determine.

To make the transition from all-analog to all-digital that is surely approaching, we have taken the first steps. We have moved from treating machines as isolated mechanical functions to coordinated information processing stages. While even our new machine control system may change in the years ahead, the fundamental concept is correct. Whatever devices we need to "roll" in the future, in addition to "framestores," we will control through an understanding of their functions rather than through brute force dictated by their location or mechanical peculiarities.

BM/E

# is Scotch Color Plus.

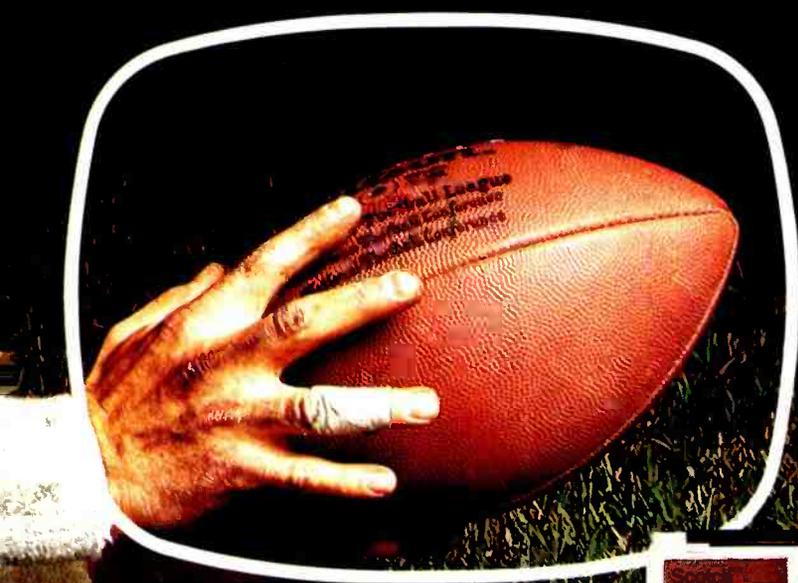

If you want real-life color and clarity from your 3/4 inch video tape masters or copies, use new Scotch® Color Plus. It gives you 2.5 dB more chroma signal-to-noise, 1.5 dB more signal-to-noise and 1.5 dB more RF output than standard U-Matic format videocassettes. That's equal to at least one generation of picture quality.

We put 25 years of video tape experience to work in developing Color Plus. And we manufacture it to the same precise standards as our 1" and quad mastering tapes.

As a result, you'll get the mastering, editing and duplicating characteristics you demand. Minimal drop out levels. Improved runability. Reduced head wear. And stop motion durability for heavy editing work.

Color Plus is available in all Mini 3/4" video cassette and Master Broadcast (MBU) run lengths... plus extended play UCA 30s and the UCA 75. And every cassette is available with the exclusive Scotch Hanger System for compact storage at no extra charge.

Put some life into your next production with Scotch Color Plus. The real-life tape. Magnetic A/V Products Division 3M.




## Scotch Color Plus.

3M Hears You.

World introduction to the TTV 1525 camera by THOMSON-CSF

# CAPTURE THE COLOR IN THE SHADOWS

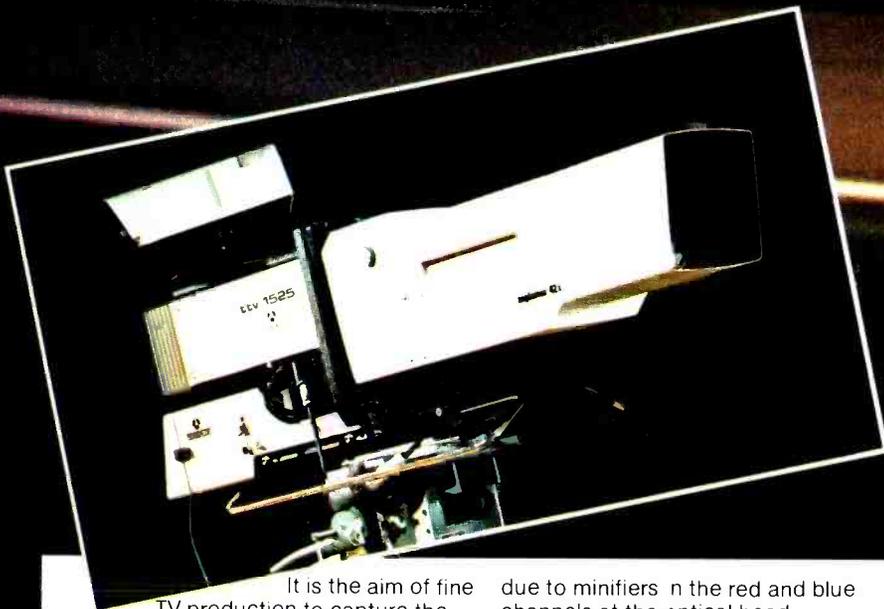

It is the aim of fine TV production to capture the fleeting moment at its best, whether it's the speeding colors of a car race at dawn in all its natural splendor, or precise studio work that does not melt the players under harsh artificial lights.

THOMSON-CSF brings you the latest development in solid state and optical technology – the TTV 1525, a totally new camera geared and ready for your special professional needs. You need the most efficient sensitivity we've achieved it. A special feature allows for stage lighting of only 2 Foot Candles with a lens opening of f1 : 1,5 and a video gain of 18 dB, keeping an excellent s/n ratio, so that you can shoot with ease. We've got you covered on all counts :

- startling sensitivity.
- high resolution.
- a clean, compact body (24.2 lbs)

due to minifiers in the red and blue channels at the optical head.

In the studio, it's the top of the line in the new generation of professional cameras.

When you are on location with a major production, simply use a lighter lens. With the pedestal mount and a 4.5" viewfinder, this camera can be operated up to one mile (1,600 m) from its CCU.

For light on-site operation, the TTV 1525 is equipped with a monocular viewfinder which reduces its weight and transforms it into a full broadcast quality portable camera with the perfect resolution and high luminosity of the best studio cameras.

This unique "three in one" camera will revolutionize the work of producers, directors and cameramen. The new TTV 1525 by THOMSON-CSF - the ultimate in perfect video.



## THOMSON-CSF

DIVISION  
RADIODIFFUSION-TELEVISION  
94, rue du Fossé Blanc  
92231 Gennevilliers / France.  
Tél. : (1) 790 65 49.

THOMSON-CSF BROADCASTING  
37, Brownhouse Road  
North Feltam Trading Estate  
U.S.A.  
Tél. : (203) 327-7700

THOMSON-CSF  
EQUIPMENT AND SYSTEMS LTD  
Hunting House, Central Way  
North Feltam Trading Estate  
Feltham, Mddx - Great Britain.  
Tél. : (01) 751.62.41.

**THOMSON-CSF's TTV 1525 : the front runner in sensitivity.**



**MOVING FROM  
HERE TO DIGITAL**

# **MACHINE CONTROL TRIMS EQUIPMENT COSTS, PREVENTS LABOR EXPANSION**


***Inflation is playing havoc with the cost of equipment and labor. Plant equipment and personnel must be managed at peak efficiency. Machine control is the light at the end of the tunnel.***

TWO YEARS AGO, ABC in New York had a serious problem. New machines were constantly being added to its hard-wired or simplified control system, requiring that new control cables be run. The problem was that the installation cost of each new cable was about \$1000. Even though many control signals were multiplexed over one cable, over 25 cables had to be run throughout the entire plant to meet the complex machine control needs. Over 100 machines had to be manipulated from 20 studios.

Al Molinari, audio-video development engineer, and Ben Greenberg, audio-video development manager, unsuccessfully sought a company that had designed machine control systems, using existing plant video lines. They did, however, discover a firm that had designed a system used in South Africa in 1973.

That company, Dynamic Technology of London, U.K., sent machine control signals over video lines without the accompanying video. Working closely with the company, Greenberg and Molinari helped them develop the present VIMACS (Vertical Interval Machine Control System). VIMACS uses standard in-plant video lines, without affecting the picture. The concept takes advantage of the fact that broadcasters use sophisticated signal conditioning techniques to provide a stable and clean video path. Thus vertical interval control signals are relatively noise-free. This results in a reduced system price, if for no other reason than the elimination of additional cable needs.

Another control system that extends the effectiveness of the engineer to a large amount of equipment located throughout the plant was first shown at the IBC exhibition last year. This is the Pye TVT-Philips LDM 600. Not yet sold in the U.S., this system controls machines with signals tuned to the video color black. As in the VIMACS system, no new cables need to be run as communication is accomplished via the existing video network. Unlike VIMACS's bi-directional video lines, the LDM 600 uses alternate TV lines to send data in opposite directions. Control of eight analog functions and 46 ON/OFF conditions is achieved with 720 data bits. Pye has found enough room in its active video technique to transmit three bi-directional 6 kHz digital intercom channels. The LDM 600 interfaces with master control switchers as well

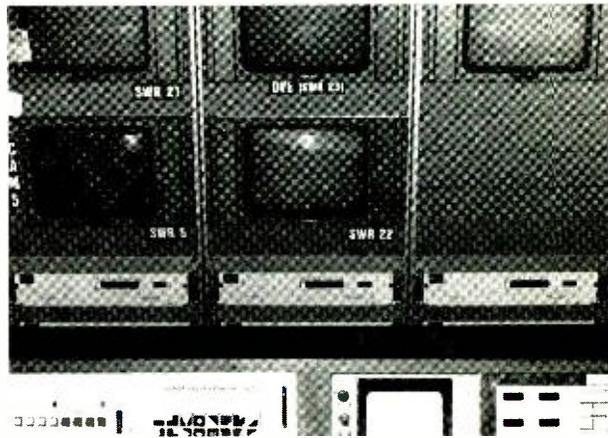

*At ABC in New York, the VIMACS machine control encoders/decoders can be seen rack-mounted horizontally below the TV monitors and directly above the production switcher*

as business computer systems. A unique option is source identification coders and decoders.

Source identification can become a major problem. At last year's Olympics, Greenberg and Molinari were faced with the difficulty of many sport event feeds arriving simultaneously; the desired event could not be spotted quickly on the video monitor. Using VIMACS software and a character generator, they designed a source identification system. This automatically keys in the captioned identifiers of only the desired sport event. The keyer was so successful it will be used again in the 1984 Olympics.

VIMACS uses available production switchers, while the Pye TVT system offers a choice between a dedicated control panel or an available production switcher. Other systems use a standard CRT terminal. However, smaller stations with limited machine control needs may favor a small dedicated control panel over a CRT terminal due to the lower cost. In the past, machine control was considered an adjunct to a routing switcher. Increasingly, routing switchers are becoming an adjunct to machine control. Studios, source machines, and destination equipment all become part of a comprehensive loop. Switchers, VTRs, and telecines are an interactive part of that loop. This means that VTR and film chain operators

## Machine Control

need no longer stand by for roll cues. With all VTRs located in one room, machine operating personnel need not move from studio to studio.

### Changing station operation

Machine control is rapidly expanding from post-production to transmitters, lighting, and all the way to total plant automation. In the early days, ac power cables had to be run for control purposes. Each additional machine required additional cables. Now that video lines or dedicated digital lines are used there is no limit to what can be controlled. The high cost of cable installation no longer limits the expansion of machine control. SMPTE has established data-line and equipment interface communication standards for this purpose. The society recently concluded a definition of protocol, or command sequence. SMPTE's digital control committee is now about to tackle the difficult problem of developing a common editing language. Once this is accomplished, universal editing commands will extend the value of machine control systems. The ultimate control system will have a common lexicon of machine commands able to be initiated by any switcher in the plant, regardless of the manufacturer.

### A growing variety of systems

Control applications vary a great deal. Large networks have different needs from smaller stations. Some users may wish to limit their control to only one type of machine. For them, there is the dedicated control panel.


On the other hand, the universal control panel will function with a variety of equipment. Both NEC and 3M use the universal control panel concept.

NEC has designed its system around a control module or matrix. A single matrix controls 15 functions on 15 different machines. By adding additional modules, a 15 by 15 multiplication of function and machine accessibility is achieved. If 10 control modules are installed, 150 functions on 150 machines can be controlled.

Bob Curwin, marketing manager of NEC, told *BM/E* that theoretically an unlimited number of machines could be controlled using the universal panel and the modular matrix building concept. Curwin said the NEC TMC 105 sends digital data over dedicated coaxial lines using the RS-232 data format. A modem port allows digital data to be converted to FSK for transmission over ordinary telephone lines. Control data can thus be sent to machines in distant cities.

Another control system using dedicated control lines and similar to NEC's system is the 3M 6500. Jerry Curr, 3M product manager, told *BM/E* that the universal control panel controls up to 99 machines of a particular type, and up to 10 different machine types. An RIC (remote interface controller) is provided at each machine to offer individual verification of machine status. Each interface handles 16 functions per machine and is continuously polled for status by the control panel. Coax to machines can run up to 5000 feet. The 3M 6500 stands alone or can be used with the firm's 40X or 20X routing switcher. A video terminal shows matrix status, all commands, and keyboard addresses to the microprocessor. Organization of the display is clear and concise.

**3 Models—6, 8 and 10 mixer dual stereo • Transformer Balanced Inputs and Outputs • 3 Inputs Per Mixer—internal pads allow mic/line selection on the same mixer • Two 4-Input Auxiliary Input Selectors—may be assigned to any mixer • Pre-fader Pushbutton Cue—in addition to normal CCW fader cue position • LED Status Indicators—color coded to aid in instant identification of function selectors • Momentary or Continuous Remote Control Contacts—internally selectable, also controls optional digital timer reset/start • Full Metering Capability—two meters standard, up to four meters and/or digital clocks and timers optionally available, all meters provided with LED peak indicators • Gain Selectable Microphone Preamps—provided with center tap access for phantom condenser microphone power, processor input/output port with buffer amplifier for outboard compressors, limiters, etc. • Programmable Muting Logic—internal pin-programmed matrix allows any selection of monitor and cue muting for the first five mixer positions • Pushbutton Aural Phase Test • Announcer's Microphone Intercom-Air Selector • Full Dual Channel Operation—**  
independent program and audition assignment pushbuttons • **Five Monitor Driver Outputs—**four muted, one non-muted • **All Mixers Switch-Selectable to Mono or Stereo • Ground-Plane Techniques Used Throughout for Increased RF Immunity • Selectable Internal or External Master Level Controls • Accessories and Options—**mono mixdown, high impedance (cassette) line input plug-ins, reference oscillator/line input plug-in, additional microphone input plug-ins, digital clock, digital timer, linear faders

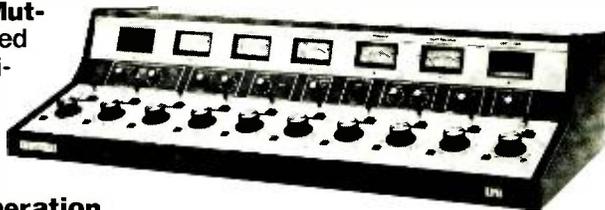

**LPB®**

**citation series**

LPB Inc. • 28 Bacton Hill Road • Frazer, PA 19355 • (215) 644-1123

Manufacturers and Distributors of Broadcast Equipment since 1960


© 1980 LPB Inc

Another form of universal machine control system is Fernseh's TCS-1. Up to 100 VTRs and film chains can be controlled, each delegated to any of eight studio control panels. A single panel can control eight multiplexers, each of which handles 30 machines—a total of 240 machines. A dual twisted pair communication line talks to machine interfaces, each of which has its own individual microprocessor. According to George Crowther, Fernseh's marketing manager, four TCS-1 systems have been sold over the past two years. The system can cascade separate studios up to four deep. A unique feature of the system is erasable programmable read-only memory (EPROM), which provides a fully software-based system. EPROMs can be altered to account for changes in machine types or control parameters. Control words are user-designed.

American Data's 3200 is a flexible machine control system that can be custom-designed to operate with the company's routing switcher.

#### Equipment control over large distances

SMPTE tests in Salt Lake City successfully sent valid machine control signals over a distance of 16,000 feet. A growing number of applications require far greater control distances than are possible using dedicated lines or video cable. For example, in New York City, Metromedia's WNEW-TV was mandated by the FCC to establish New Jersey studios to provide a tax base input in that state. An ICR (inter-city-relay) microwave link was established to control \$270,000 worth of VTRs and \$140,000 in film-chain equipment. Four film editors, six engineers, four operators, and a maintenance supervisor

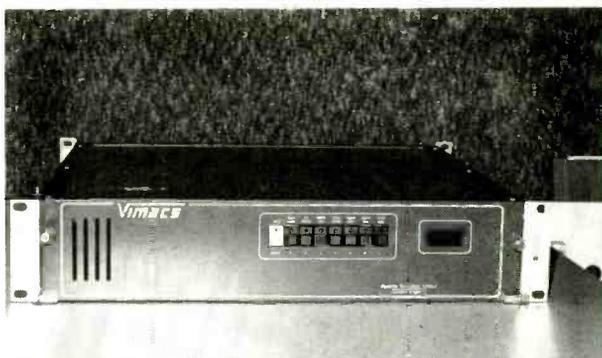

VIMACS machine control rack-mounted interface includes encoder/decoder, power supply, character generator, and time code card. Video and machine control line are in rear

are located in the New Jersey studios.

According to Rich Miller, assistant chief engineer of WNEW-TV, without machine control the number of engineers in New Jersey would have to be doubled. In addition, the sync problems would be devastating, frame store devices would be required for each remote line, and a substantial on-site repair inventory would be required. WNEW-TV is about to install a New Jersey news bureau and do live street broadcasts from there. Their present microwave link machine control system will adjust all the microwave antennas remotely.

A microwave link is less expensive for full-time machine control operation than is a dedicated telephone line. However, if microwave equipment is not available,

## The Orban 672A: A Dream Equalizer at a Practical Price



The 672A is a single-channel equalizer offering astonishing control and versatility. There are eight non-interacting parametric bands with reciprocal curves and the convenience of graphic-style controls. Highpass and lowpass filters with 12dB/octave slopes that tune continuously over a 100:1 frequency range. And, separate outputs that let you use the 672A as an eight-band parametric cascaded with an electronic crossover in reinforcement and monitor tuning applications.

The dream equalizer is usable practically *everywhere* in professional and semi-professional sound: recording studios, cinema, theater, reinforcement, broadcasting, disco — you name it! Yet its price is down-to-earth. And, it's built to full professional standards.

Check it out at your Orban pro-audio dealer.

**orban** Orban Associates Inc.  
645 Bryant Street  
San Francisco, CA 94107  
(415) 957-1067

## Machine Control

that too can be an expensive data communication link. Duncan Campbell of American Laser Co., Goleta, Calif., suggests an interesting alternative for distances up to two miles. Video containing machine control signals could be transmitted over laser beam using American Laser Co. standard transceivers. There is no license requirement and the system cost is one-third that of microwave transmission. A laser channel extends up to 12 MHz. This is more than sufficient for high-quality video or for six and a half megabits of digital data.

When ABC has finally completed its purchase of VIMACS encoder/decoders, the network will own over 500 units. Some will be located at KABC and at outlets in Washington D.C., Detroit, and Chicago. It is conceivable that a production studio in New York City could control a VTR in Chicago, the west coast, or even further away. This is not at all science fiction. Each VIMACS encoder/decoder has a modem port for use when video lines are not available. Digital data is converted to FSK and sent directly over ordinary telephone lines. ABC in New York now runs six VTRs in Union City, N.J. over dial-up telephone lines.


### System reliability

Control systems cut labor costs by preventing the expansion of new labor requirements. A single person in a room full of VTRs can change tapes on multiple machines in response to requests from numerous studios. Digital signals in dedicated lines can control as many

machines as matrix module stacking will allow. Theoretically, a full complement of VIMACS encoders and decoders could control 4096 machines, without the installation of a single cable. Given these benefits, it will not be long before more and more broadcasters will take to machine control. With stations so dependent upon these systems, what is their reliability?

When dedicated control panels are used, manual backup is provided to account for any failure in a control panel circuit. In the 3M and NEC systems, an under voltage alarm signals an engineer when data-line voltage drops below a preset danger level. The Pye-Philips system has battery power to protect the main computer memory, so that signal routing will not be disturbed when ac power fails.

In the VIMACS system, encoder/decoders at each machine location results in a completely modular approach. The impact of component failure would be limited to only that small part of the total system loop. Of course, if video is lost, that is an entirely different matter. Assuming that video is intact, Dynamic Technology and ABC have designed a great deal of reliability into VIMACS. Each encoder/decoder has a Zilog Z-80 microprocessor with dip-switching and EPROM for software flexibility. Data transmission integrity is enhanced by a sophisticated data protocol. In the first field of a video frame, 40 bits are sent: 24 data bits and 16 qualifiers for cyclical redundancy. The second field of the same video frame contains another 40 bits. This time, 32 are machine commands and eight are parity bits. Thus, a total of 24 bits are used only for reliability purposes to guarantee data integrity.

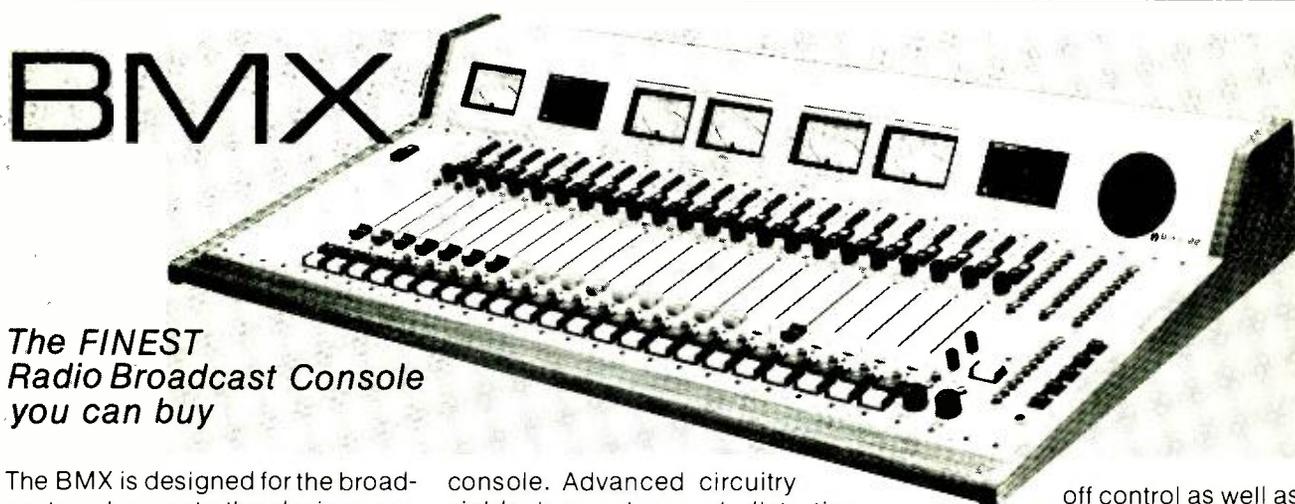

### The *FINEST* Radio Broadcast Console you can buy

The BMX is designed for the broadcaster who wants the design, performance and features of a custom console, at an "off the shelf" console price and delivery.

Penny and Giles Conductive Plastic Faders, Deane Jensen Audio Transformers, and Ernest Turner/Crompton Meters are typical of the first class of components used throughout the

console. Advanced circuitry yields low noise and distortion along with excellent frequency response and headroom/overload capability.

All input and output modules feature audio patch points for the convenient connection of auxiliary signal processing equipment. CMOS Logic is used for input channel on/

off control as well as remote control facilities.

The microphone modules feature remote control of on, off, cough and talkback while the line modules provide the commands for the control of turntables and cartridge/tape decks. In addition, the on, off and cue status of the line modules is remote controllable.



*BMX . . . Best by Design, Construction, Performance and Features*  
Ask the broadcaster who owns one

**Pacific Recorders & Engineering Corporation**  
11100 Roselle Street, San Diego, California 92121 • (714) 453-3255

Circle 136 on Reader Service Card




## 50 kW VHF power, greater efficiency. 4CX40,000G tetrode and cavities from Eimac.

Eimac's new CV-2200 series of practical, low-cost cavities are available now. Combined with Eimac's 4CX40,000G VHF tetrode, this efficient, compact package is recommended for FM broadcast service, VHF-television, particle acceleration and VHF radar.

Generating a measured power output of 60 kW, the 4CX40,000G tetrode offers power gains of 20 dB up to 218 MHz. High stability is achieved with the pyrolytic graphite grid structure. And a highly efficient, economical and quiet anode cooling system is inherent in its design.

Eimac supplies cavity and tube to match your requirements.

We back it up with know-how and application engineering information.

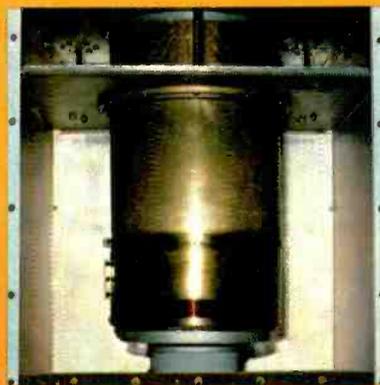

50 kW FM broadcast cavity CV-2200 with 4CX40,000G tetrode.

More information is available from Varian Eimac Division. Or

the nearest Varian Electron Device Group sales office. Call or write today.

Electron Device Group  
Eimac Division  
301 Industrial Way  
San Carlos, California 94070  
415 • 592-1221,  
ext. 218



varian

Circle 137 on Reader Service Card



**IF YOU'RE GOING TO DO IT ...  
DO IT RIGHT!**

We "do it right" when designing and constructing mobile and fixed television facilities to insure superior technical/mechanical performance and human comfort.

**Excellence in Telecommunication Systems Design and Engineering.**

Circle 188 on Reader Service Card



**COMMUNICATION ENGINEERS**

San Diego, California • (714) 560-1578

## Machine Control

Effective control of plant equipment could never get off the ground without universal standards for communication lines, protocol, and the data itself. The electrical and mechanical features of the communication line have been compared to a highway and the protocol or sequence of characters on the line to a vehicle traveling on that highway. The data being sent is compared to the passengers in the vehicle. Control panels must interface with equipment made by various manufacturers. Ultimately, machines themselves will talk to each other.

SMPTE's committee on digital control has been attacking these problems for two years. Tests were conducted at KSL-TV, Salt Lake City, in September, 1979, and in October, 1980 at KPIX in San Francisco. Electrical and mechanical standards for machine control communication lines were the first priority.

SMPTE's electrical standards call for a four-wire, full-duplex, balanced configuration. Line impedance is 75 to 110 ohms and data rate is 38.4 kilobaud. Line drivers such as the TI-SN 75-172, which are designed to operate on RS-422, will function with the new SMPTE standard.

Robert McCall, chairman of SMPTE's digital control committee, told *BM/E* that the new standard permits true plant automation to become a reality. In-plant control can now proceed beyond the limits of what was once considered only machine control. Transmitters, lighting systems, test equipment, and any variable may be controlled. The new standard requires no new test gear.

### Future trends in machine control

Machine control luminaries see the field expanding in several directions. One is more software directly at machine interface. More microprocessor programming at a machine means a machine can talk to other machines upon request. For example, the same command that creates a still store display will also drive a character generator to produce a pre-chosen title.

Another extension is in the area of human decision-making. Today, the system tells the operator what resources are available. The operator then makes the choices. In the future, software programming will permit the system itself to evaluate available machines, explore various options, and choose alternatives.

The system is in a better position than the operator to evaluate machines in the loop because it can obtain a function by function tally of a given machine. For example, VTR 3 may be available for playback only, but not for record. It would then only be put on line for playback. The machine control system would continuously interrogate each machine for an updated indication of the status of each function.

A slight extension of this idea leads to a fascinating way to eliminate the financial loss associated with emergency equipment repairs. Sensing transducers at each machine would detect machine-generated waveforms, power output, frequency stability, and other specifications. Any variation beyond preprogrammed limits would indicate that a machine component is going south. Periodic preventative maintenance procedures could pick up this data and remove a machine *before* it fails. In another variation of this idea, upper and lower limit alarms would immediately notify the engineer when any machine in the plant is out of spec. **BM/E**








American Data's 3200 machine control system is in use at San Francisco's KQED



M. Cosgrove (right) explains the Philips LDM 600 machine control system, currently in use in Europe, which may make an American appearance in the near future



Control Video Corporation is one of several companies now making special purpose machine control systems. The computer control concepts used in such devices may lead to larger and more powerful systems

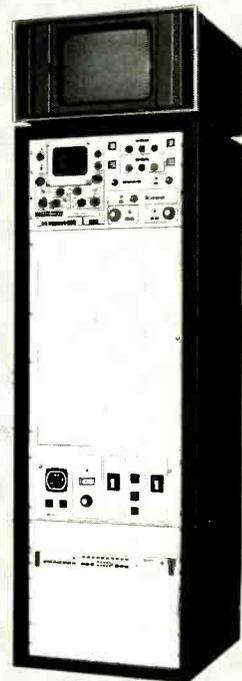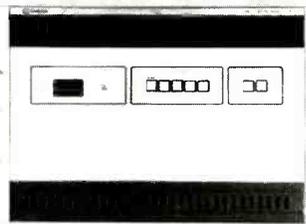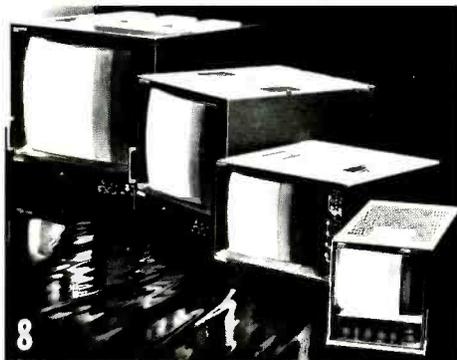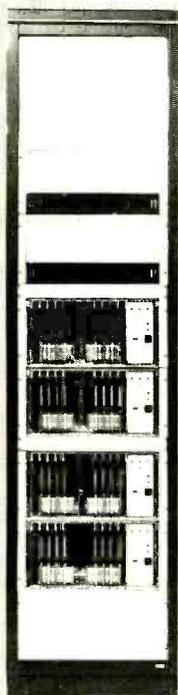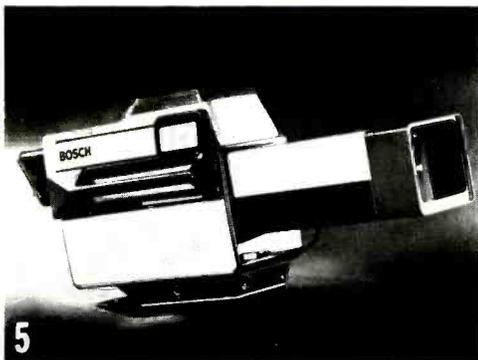

# The most comprehensive family of products now offered to the broadcast industry.

**VTR's.** Superb Bosch mechanical engineering provides 1-inch interchange and multi-generation performance that is unsurpassed. Shown (1 at left) are the reel-to-reel portable BCN-20, the reel-to-reel studio recorder BCN-51, and the world's first automatic multicassette machine with 16 hours of continuous playback: BCN-100. Also in the BCN family is the unique BCN-5, 18 lbs. lighter than any other 1-inch portable. (2)

**Mach One™ Computer-Assisted Editor.** By any comparison, Mach One's keyboard requires the absolute minimum number of keystrokes for all operations, which include special effects and auto assembly. Controls up to six VTR's. (3)

**Cameras.** A complete line including the new KCA-100 ENG camera with state-of-the-art sensitivity, resolution, and signal-to-noise performance (4); the KCP-60 production camera with the optimum blend of high performance and low price (5), and the top of the line, fully automatic KCK. (6)

**Distribution Switching.** The TVS/TAS-1000 series, with the latest in alpha-numeric controls for easy, error-free operation, has set a standard around the world for compact design and reliability. Building-block matrix concept for configurations from 10 X 10 to 100 X 100 and beyond. (7)

**Monitors.** No less than twenty models, from 25-inch color to 9-inch monochrome; three performance/price classes; cabinet and rackmount; all color standards. (8)

**Telecine.** Fixed or variable slow motion speeds, forward and reverse, as well as fast motion up to 25 times normal speed is now possible with the revolutionary FDL-60 CCD Telecine. (9) And for the economy and input flexibility of vidicon film chains, the TCF-3000 Telecine Camera. (10)

**Noise Reduction.** Up to 18 dB signal-to-noise improvement, plus image enhancement and chroma-to-luminance delay correction with the TDF-2 Digital Noise Filter. (11)

**Graphics Systems.** The software-based Compositor I™, with full function dual channels, offers push-button access to over 100 font styles and the largest memory of any machine of its kind. (12)


For detailed information on the Fernseh family of products, including machine control systems, sync generators, optical multiplexers, processing amplifiers, color encoders, and a complete line of video, audio, and pulse distribution equipment, write or call Fernseh Inc., P.O. Box 15068, Salt Lake City, Utah 84115, (801) 972-8000.

*For literature only, call 1-(800)-821-7700, Ext. 701  
In Missouri, call 1-(800)-892-7655, Ext. 701*

**FERNSEH INC.**  
*the Video Corporation of  
Bell & Howell and Robert Bosch*

Circle 140 on Reader Service Card

# ON THE OTHER HAND, OUR ROUTING SWITCHERS HANDLE GROWTH VERY NICELY.

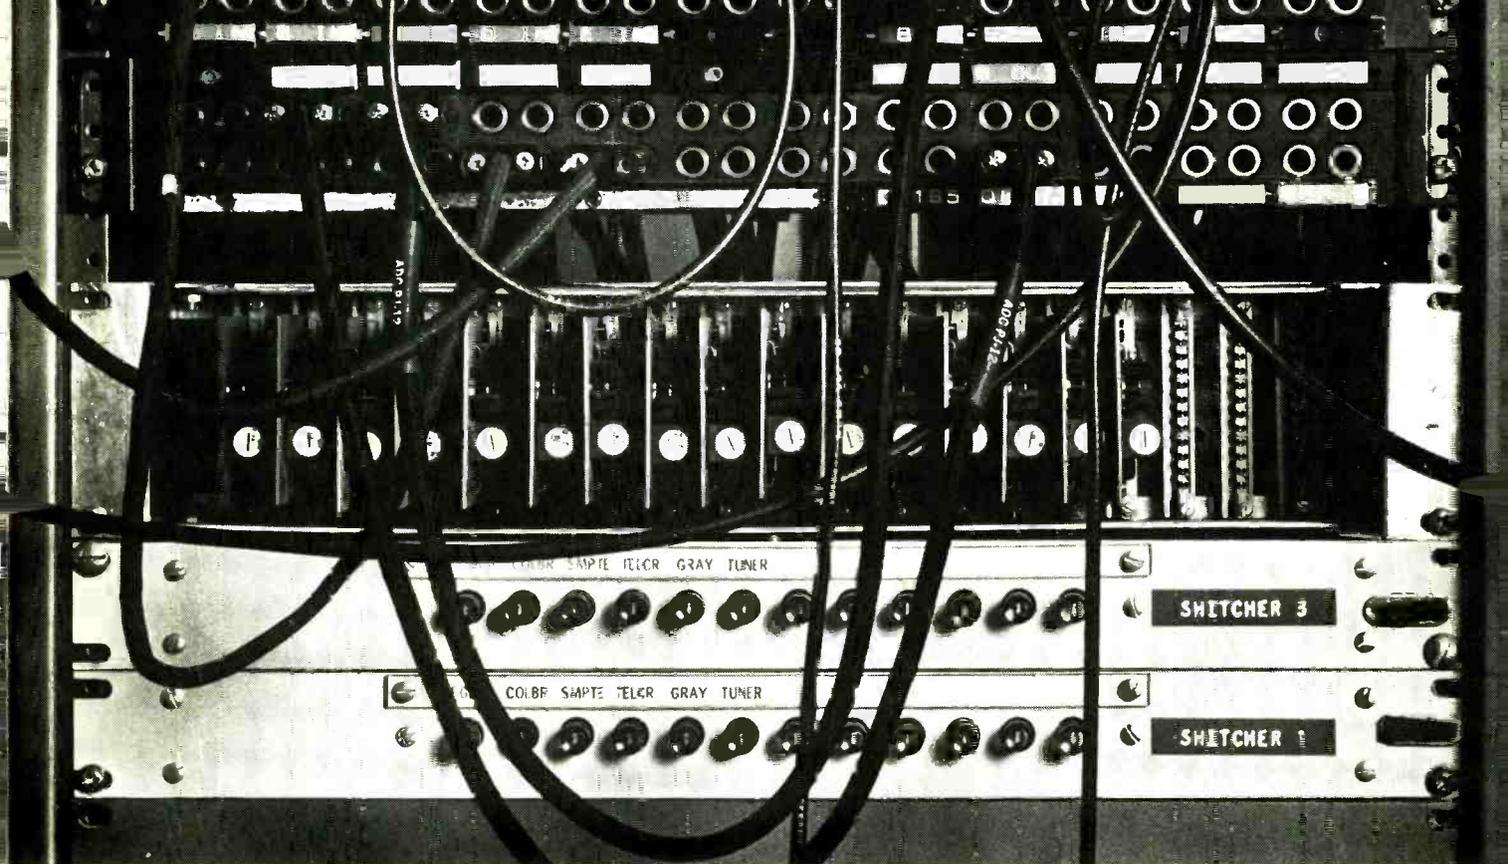


With a microprocessor-based 3M routing switcher, you can eliminate the problems of hard wiring once and for all. And specify just about any type of control you want.

It all depends on how you'd like to set it up. Our design engineers can then tailor the matrix for you. From your smallest requirement on up to any desired size. And they'll help you select the control that's best suited to your needs, too.

The choice is yours. Touchpad, thumbwheel, illuminated or L.E.D. pushbutton, machine, X-Y, or alphanumeric universal control. Even a terminal control that allows you "supervisory" control throughout the system, or computer control through our RS-232 port.

What's more, 3M routing switchers are easily expandable. Start with a matrix that matches your present requirements. Then as your studio grows, your routing switcher does, too. With the simple addition of extra frames and switch cards.

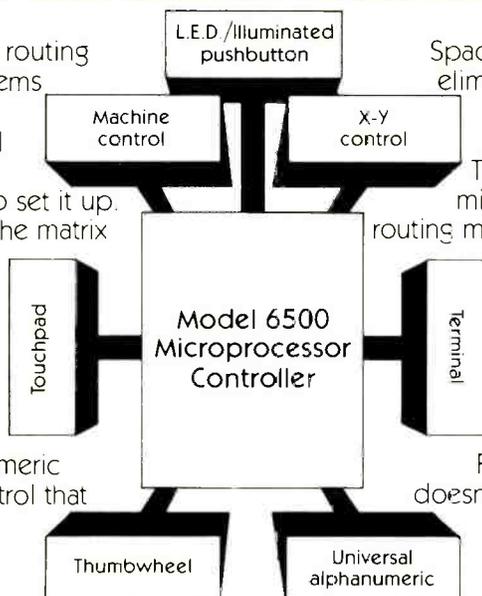

Space-guzzling, multi-conductor cables are eliminated. And so are unnecessary output panels. Because with our system, outputs can be reallocated as required.

The heart of the system, the Model 6500 microprocessor, as well as controlling the routing matrix, can be integrated with a machine control system to offer absolute production control of film chains, VTRs and other production machines.

Or it can be used as a stand-alone machine control system which offers the same coaxial wiring and expandability of the routing switcher panel.

Finally, a routing switcher whose growth doesn't depend on the size of your building.

For more information about 3M routing switchers, or a custom design consultation for your studio, call collect, (612) 736-1032. Or write on your letterhead to: Video Products/3M, Bldg. 223-5E/3M Center, St. Paul, MN 55144.

**THE ROUTING SWITCHERS THAT GROW  
AS YOUR NEEDS GROW.**



**MOVING FROM  
HERE TO DIGITAL**

# **DIGITAL TELEVISION DEVELOPMENT: A LOOK INTO THE FUTURE**

By David E. Acker

---

***The development of the digital studio hinges on the clear understanding of how the technology has to evolve. The goals, standards, and equipment must all mesh for the smooth transition to digital.***

---

THE DIGITAL TELEVISION REVOLUTION, launched nearly a decade ago with the development of the first digital time base corrector, has been the technological basis for the vast majority of new television products developed over this period of time. Full digital processing is the way of the future and can provide advantages in many areas. Let's look at a few:

- The digital signal is "robust" compared to the "fragile" analog waveform that is currently routed from one processing equipment to another.
- Signal processing capabilities such as special effects, which are accomplished in the digital domain, are not possible using the analog techniques.
- Digital processing offers economic advantages as a direct result of digital processing advancements associated with the rapid growth of the computer industry, and will continue in the same direction—more capability for less cost.
- Digital videotape recorder (DVR) multi-generation performance far exceeds that of current analog equipment.
- Operational advantages in editing, production, and control are inherent in digital systems.
- Converting the signal into digitized samples can provide a basis for program interchange from one TV standard to another.

How *do* we get there? What preparation is necessary? How does one plan for the future? Many questions still must be answered to allow us to even start to prepare for the expansion we expect in digital television. With clearly defined goals, which I believe can be simply stated in

---

**David E. Acker** is president of Datra Inc., a consultant to the broadcast industry. He was formerly president of Microtime, Inc.

terms of the advantages that digital processing offers, we have to proceed to generate attainable and logical standards and in turn develop equipment that will provide the capability that meets our originally stated goals.

## **Standards**

*The digital signal.* A considerable amount of study and effort has been expended by SMPTE committees in an effort to generate standards for digital television signals. The Working Group on Digital Video Standards under the direction of the committee on new technology was established to concentrate on the video aspects of the new and quickly emerging technology.

Many in the field predicted the evolution of digital television would begin with the digital interconnection of processing boxes so that the undesirable effects of A-D and D-A converters (multiple codecs—*code/decode*) could be eliminated. It was primarily for this reason that the Working Group was given the charter to define this interconnection interface. This group did the required research and prepared a recommendation that specified a 4x subcarrier sampling rate and eight-bit (255 grey code levels) encoding of the composite signal and described the characteristics of 10 parallel signal lines (eight bits, one timing signal and the clock signal) which would be used to interconnect the black boxes.

With this document barely completed, a rather significant change in direction and thinking occurred within the committee. The emphasis switched from composite encoding to component encoding in an effort to generate a standard that would be directly compatible or easily converted to that proposed by television engineers in Europe. While this represented a large change in scope and in charter, I believe it was timely and the right direction to take; the emphasis on the interconnection of digital black boxes was over. In fact, it is not apparent that any manufacturer has interconnected even its own black boxes, standard or no standard. Even if some have, it is certainly not commonly done with digital equipment. The reason is that extensive use of digital processing beyond what is included in one box, such as a time base

## Digital Television Development

corrector, field/frame store, noise reducer, or special effects equipment, hasn't happened yet. Sure, a few of these functions have been combined, but they are still contained within the unit. So, despite the fact that we are in the digital decade, we are not ready to interconnect a series of digital processors and replace all of the analog equipment in the studios.

*The video tape recorder.* Video tape recorder standards are, of course, also essential to the realization of all of the benefits of digital processing. Again, SMPTE has established a Study Group on Digital Television Recording that will make its recommendations to the committee on new technology, which in turn will (it is hoped) appoint a working group to make recommendations regarding standards.

Several technical aspects have to be considered, and

### Hierarchical Structure

Ratios	$f_s$ (MHz)		
	Y	R-Y	B-Y
2:1:1	7	3.5	3.5
4:1:1	14	3.5	3.5
4:2:2	14	7	7
4:4:4	14	14	14

Fig. 1. Table shows possible sampling rates in a hierarchical relationship for component encoding

while it would be highly desirable to have the same standard for both processing and recording it may not be possible to simultaneously realize sought-after economic goals regarding tape consumption, achieve projected performance levels, and consider the major worldwide television standards (NTSC, PAL, and SECAM) for program interchange.

Whatever the final format or (as has been suggested) heirarchy of formats that will allow manufacturers to make meaningful performance/cost tradeoffs, the basic reasons for digital recording should not be lost in hassles of standardization. Better overall performance in areas such as signal-to-noise, substantially increased multi-generation capability to simplify post-production and distribution, and maximization of the performance/cost ratio are the advantages that must not be lost.

### Multiple standards and codes

It is almost certain that three video standards will be needed for digital video in the future. First, the basic interface and processing standard as discussed above will be required. Secondly, a single-wire, serial data transmission code which will permit studio equipment interconnection over longer distances will be needed—it simply is not practical to consider multiple parallel paths (component encoding using eight bits, a clock, and a timing signal would require 26 lines). Thirdly, it is likely that a hierarchical approach that has been discussed in the literature will be adopted for recording, representing a third set of digital television codes. A brief discussion of this approach follows.

In specifying the sampling rates for component encod-

# FIDELIPAC takes NAB AA cartridge standards seriously.

Somebody else  
takes them  
for  
granted.

Running tension. Phase. Overall width. Thickness. Wow and flutter. Fidelipac Master Cart cartridges meet or exceed all current NAB standards. And we can prove it. Something somebody else can't.

We make sure factory loaded Fidelipac Master Cart cartridges meet all NAB standards because they make sense. And they make for a flawless air sound without the mush, swish and gurgle that can make you sound less professional than you really are.

So if somebody tries to tell you their carts meet NAB standards, make them prove it. When they can't, show them the door. And as a parting shot, tell them you use Fidelipac.

Because you've got standards too.  
"SEE US AT NAB BOOTH #204"



FIDELIPAC<sup>®</sup>  
BROADCAST TAPE CARTRIDGES

Fidelipac Corporation  
109 Gaither Drive • Mt. Laurel, NJ 08057 • USA  
TWX/TELEX 710-897-0254 FIDELIPAC MTLR  
609-235-3511

Who knows more about tape cartridges than Fidelipac?

Circle 142 on Reader Service Card

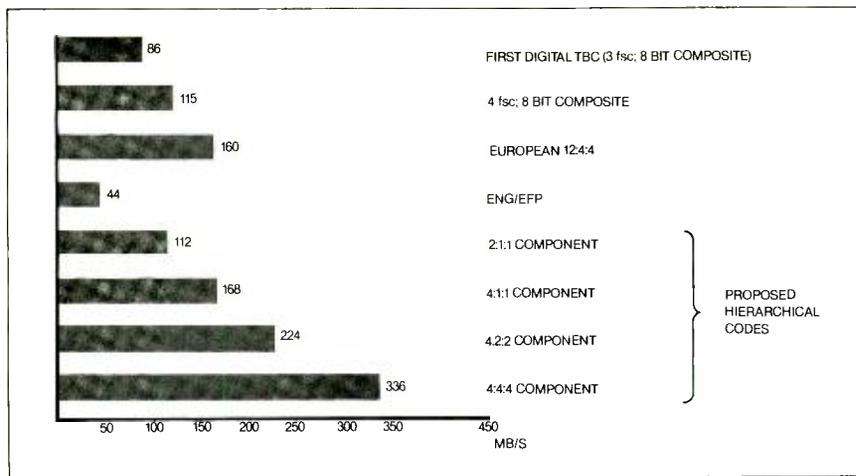


Chart shows various digital television encoding schemes used in existing and experimental equipment

ing, it is possible to construct a family of codes that allows simple conversion techniques to change from one code to another. The highest level code might be direct conversion of RGB signals to digital format, thus requiring the highest sampling rates; the lowest would be aimed at ENG/EFP performance and employ the lowest sampling rates. See Figure 1, which relates these various parameters.

An important issue that perhaps is lost sight of in the heat of debate over which code or standard is best, is: who is going to build the equipment so specified? Will manufacturers be enticed into providing the necessary equipment for hierarchical conversion, for example, or will they spend their R&D dollars on something more lucrative?

### Equipment needs

Digital processing has several advantages, as has been pointed out above. There are others, related to the equipment, that are equally important. For example, we can achieve a high degree of stability and reliability with virtually no "tweaking" using digital circuits. In addition, simple operation of digital equipment is possible through the use of microprocessor control (and a human-engineered control panel interface to the world outside). Self-diagnostic circuitry can be incorporated into the system design to aid in maintenance and repair while minimizing test equipment requirements and service training. These characteristics have to be included in any digital equipment, again in line with our overall goals to fully realize the advantages and utilize the extensive

## Audio Tape

for professionals

**REEL TO REEL TAPE**  
Ampex, 3M. All grades.  
On reels or hubs.

**CASSETTES, C-10—C-90**  
With Agfa, TDK tape.

**LEADER & SPLICING TAPE**

**EMPTY REELS & BOXES**  
All widths, sizes.

**Competitive!**  
**Shipped from Stock!**

Ask for our recording supplies catalog

**Polyline Corp.** 312/298-5300  
1233 Rand Rd. • Des Plaines, IL 60016

15

Circle 143 on Reader Service Card

# The Beyer MCE-5: Easy to hide. Hard to overlook.

At the last NAB Show, we introduced a contest in which entrants were asked to try and spot two of our MCE-5 mics in ads that appeared in various broadcast publications. The mics, which have phenomenal dynamics and are super small and lightweight, were hidden on a newscaster.

The winners, drawn from literally thousands of entries, were Messrs. Jeff Israel, ESPN; Richard A. Miller, N.J. Public TV; W. Baldwin, WBUX-AM; David P. Maxson, WCRB-FM; and, Franklin J. Forester, WGR-TV. Each won a pair of MCE-5 mics. We congratulate them for their sharp eyes. Our little mic is difficult to spot when it's hidden.

But if you are in broadcasting and are concerned with quality and performance, the MCE-5 is a tough mic to overlook. For more information, contact Norm Wieland at Beyer Dynamic Inc., 5-05 Burns Avenue, Hicksville, NY 11801. Phone: (516) 935-8000.

**BEYER DYNAMIC, INC.**



**Beyer Dynamic**

Circle 144 on Reader Service Card

## Digital Television Development

capabilities of digital processing.

The digital video tape recorder (DVR) would seem to be the most vital link in the chain of digital processing equipment. However, without the equipment means for switching and distributing digital signals, conversion to analog is necessary at the DVR output. Therefore, we must have all of today's major analog processing equipment available to us in digital format to fully realize all of the advantages of digital and, of course, to build an all-digital studio.


As has been discussed in the literature, the fastest way to attain our goals is through an evolutionary process

which begins with a digital editing subsystem. The heart of this system will be the DVR, so therefore we will need that first. The digital switcher/mixer would complete this subsystem. More sophisticated switchers and distribution equipment should follow to permit larger-scale use of digital processing in the studio. The signal in digital form cannot be viewed directly without conversion back to analog; monitoring equipment therefore will be necessary to verify program continuity and quality.

One fundamentally important last point—the economic factors associated with digital equipment and processing must provide a clear advantage over current analog equipment. If not, why change? Simply because it's digital? Key factors, in addition to initial costs, that must be included in the economic analysis are: pre- and

Data Rates Mb/s	Ratios	Samples Per H-Line	$f_s$ MHz		Maximum Practical Bandwidth MHz	Applications	Pros	Cons
	Y:R - Y:B - Y	Y R - Y, B - Y	Y R - Y, B - Y	Y R - Y, B - Y				
115	2:1:1	456 228	7.2 3.6			<ul style="list-style-type: none"> <li>ENG/EPF</li> <li>Lower cost video equipment</li> </ul>	<ul style="list-style-type: none"> <li>Lowest data rate</li> </ul>	<ul style="list-style-type: none"> <li>Limited picture resolution</li> </ul>
172	4:1:1	912 228	14.3 3.6			<ul style="list-style-type: none"> <li>ENG/EPF</li> <li>Some video processing equipment</li> </ul>	<ul style="list-style-type: none"> <li>Low data rate</li> <li>Better Y resolution than 2:1:1</li> </ul>	<ul style="list-style-type: none"> <li>Y and R - Y, B - Y bandwidths not fully compatible</li> </ul>
228	4.2:2	912 456	14.3 7.2			<ul style="list-style-type: none"> <li>Some teleproduction</li> <li>Most video equipment processing</li> </ul>	<ul style="list-style-type: none"> <li>Good technical performance vs data rate tradeoff</li> </ul>	<ul style="list-style-type: none"> <li>Probably not high enough performance for all studio processing</li> </ul>
343	R G B 4:4:4	912	14.3			<ul style="list-style-type: none"> <li>High-quality studio teleproduction</li> </ul>	<ul style="list-style-type: none"> <li>Should provide excellent overall performance</li> </ul>	<ul style="list-style-type: none"> <li>Highest data rate</li> </ul>

Cost/benefit tradeoffs for various sampling schemes

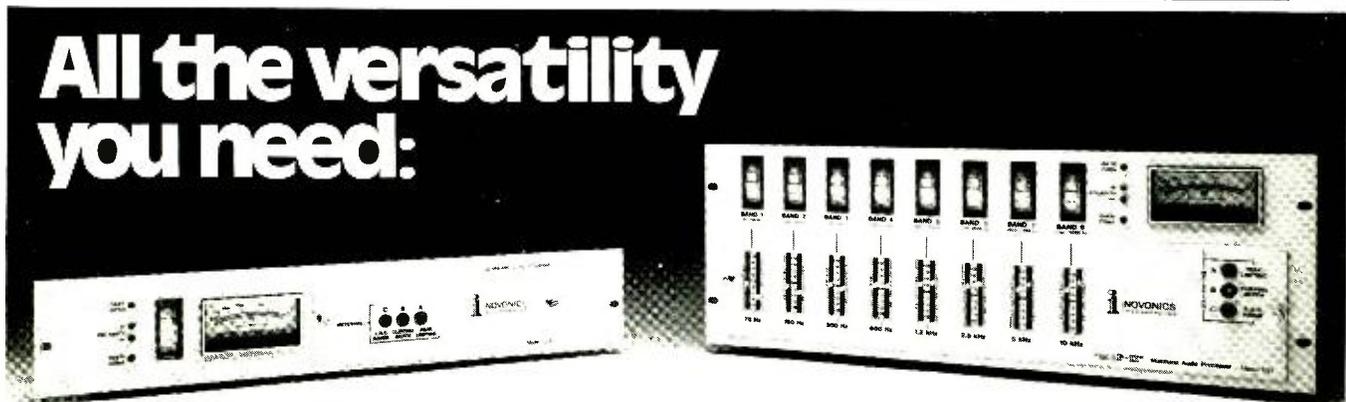

## a pair of better ideas for audio processing.

Inovonics' MAP II and 215 satisfy all of your needs for multiband or broadband audio processing in AM or FM broadcast, audio production, or TV/film situations.

For multiband processing, MAP II's gentle 8-band compression, gain-riding A.G.C., and absolute peak controller for AM or FM make it the most versatile "single package" processor in the industry.

And our new 215 broadband processor combines three very affordable options in one package: a slow A.G.C., a smooth, average-level compressor and an AM or FM absolute peak controller.

Select all three, and the 215 stands alone as your complete audio-processing system. Or, select only the options that will complement the equipment you already have. For

instance, the 215 chassis accepts MAP II's removable peak controller for split studio/transmitter operation.

Together — or separately — Inovonics' 215 and MAP II give you all the audio-processing versatility you need — at a price you can afford.

Call or write us today. MAP II — \$1670. Model 215 — \$200 to \$785, depending on options selected.

### Inovonics, Inc.


503-B Vandell Way  
Campbell, CA 95008

Telephone:  
408 374-8300



"SEE US AT NAB BOOTH #214"

Circle 145 on Reader Service Card

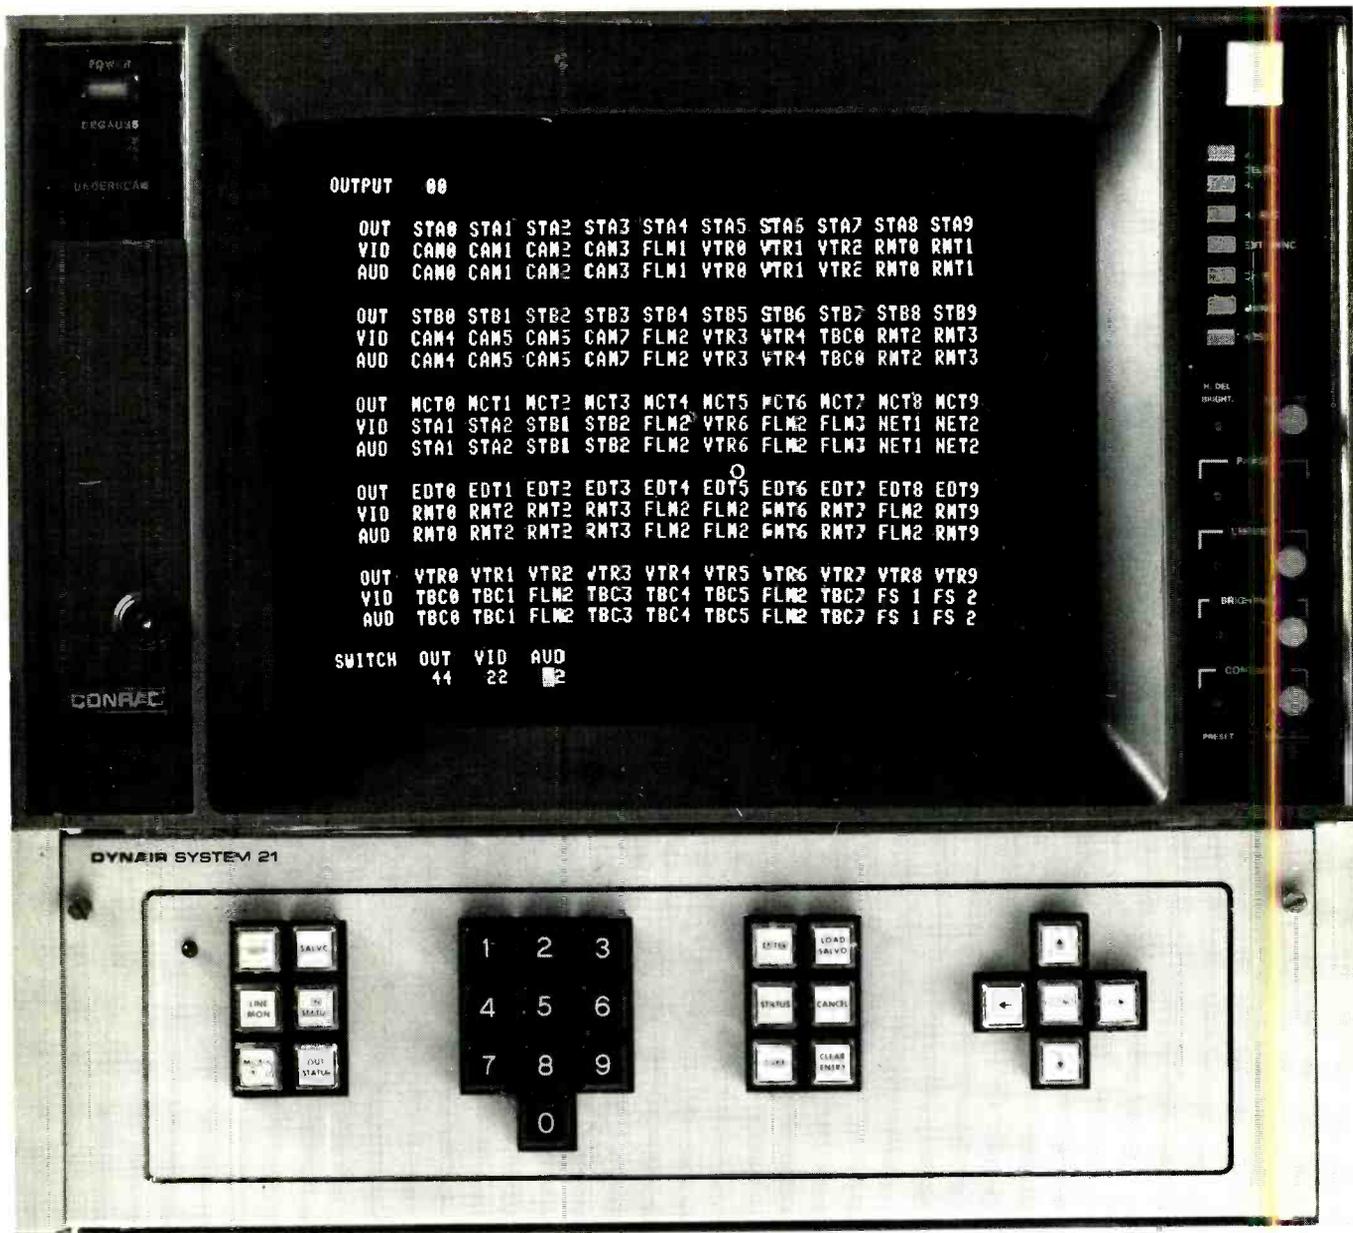

# What's up?

Plenty! CRT distribution switcher status monitors are not new, but DYNAIR's SCA-250B is in a class by itself. It makes the System 21 tell all.

It's a master control... using easy to understand keys, call for any one of the System 21's 1000 outputs. Connect it to any of the 1000 inputs, different video and audio if desired.

Not enough? Load 80 preset selections. Edit at will and then make all switches on the *same vertical interval*.

Status by the output? Pick a number and you'll see that output plus the next 49. Choose numerics or mnemonics. Roll through outputs 50 at a time.

Status by the input? Key in a source and the display lists all outputs on line... *right now*... in numerics or mnemonics.

There's more! So ask about System 21's capabilities. The SCA-250B is only a 5 1/4" example.

## SYSTEM 21

**DYNAIR** 5275 Market Street, San Diego, California U.S.A. 92114; Phone: (714) 263-7711; TWX: (910) 335-2040

Circle 146 on Reader Service Card

www.americanradiohistory.com

## Digital Television Development

post-production savings, operator skill level (training costs), maintenance costs and revenue producing capacity—all of which should be attractive, if again, our basic goals are met.

### The digital studio—an evolution

It is clear that the all-digital studio will evolve from several stages of continued integration of digital equipment into the studio. With the editing subsystem described earlier and the addition of other equipment, we will eventually create the all-digital studio. We will be living with a hybrid analog/digital system for several years since it will be some time before frequent use of analog archival tapes and program sources drops off to make way for all-digital program sources.

Serial bit-stream data transmission will require new equipment and considerable reworking of pertinent existing communications links. It will take a fair amount of time to make this change and it most certainly will have to be carefully planned. Yes, the all-digital studio will happen, but it represents a significantly larger change than what was required to convert to color back in the 1950s—something to think about!

To summarize the basic thoughts in this article, I believe that we should see the following steps occur in the advancement of digital television—indeed, we are even now in the midst of the first three:

- The goals for digital television processing clearly identified and sought through standards and by equipment manufacturers as we proceed into the digital decade;

- The encoding formats and standards set forth to reap the advantages of digital, equal or better the performance of current equipment, and provide more capability than what is available today—at equal or lower cost;
- Continued integration of digital and analog equipment into studio and teleproduction systems so that users can gain basic experience and manufacturers have sufficient time to create products that will provide the inherent stability, reliability, and full capability of digital systems;
- Development of basic and necessary system functions based on technical merit and optimum choice of parameters; and finally
- To proceed with the orderly conversion of today's analog studios to digital, where it makes sense and where the advantages are clear.

BM/E

### References

Davidoff, F., "The All-Digital Television Studio," paper presented at the 14th SMPTE Television Conference, Toronto, February 1980.

Lind, A.H., "An Overview of Progress toward the Digital TV Plant," paper presented at the 14th SMPTE Television Conference, Toronto, February 1980.

Paulson, C.R., "Television is Moving Fast... From A to D," *Broadcast Communications*, Volume 2, Number 8 and 9, August and September 1979.

Remley, F.M., "What Do We Expect from Digital Video Equipment," paper presented at the 122nd SMPTE Technical Conference, New York City, November 1980.

Various SMPTE Committee Reports and References.

## It's tough to compare something in a class by itself.

We have taken a reliable, conservative design and updated it with the latest technology, to give you an FM Transmitter that will perform beyond your expectations.


Our 1.5, 3.5, and 5.5 kW FM Transmitters feature a high efficiency, grounded-grid PA. You'll like their stability and trouble-free maintenance.

Our automatic power output control, auto recycling, and overload protection are standard features that assure your getting a transmitter that puts out the power you expect, without failure, day after day.

The modulation of our on-frequency, direct FM, solid-state exciter is varactor controlled. The possibility of frequency drift is eliminated by a crystal controlled reference oscillator.


A 12 pulse, 3-phase power supply adds to the reliability of these transmitters by reducing the number of failure prone components.

Such features let you know that this is a "class" product. But once you know that this is also the most attractively priced transmitter on the market, you will agree it almost defies comparison.

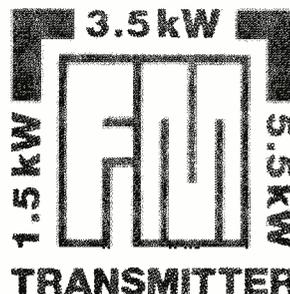

The Sound Source **Sintronic** CORPORATION

212 Welsh Pool Road, Lionville, PA 19353 (215) 363-0444

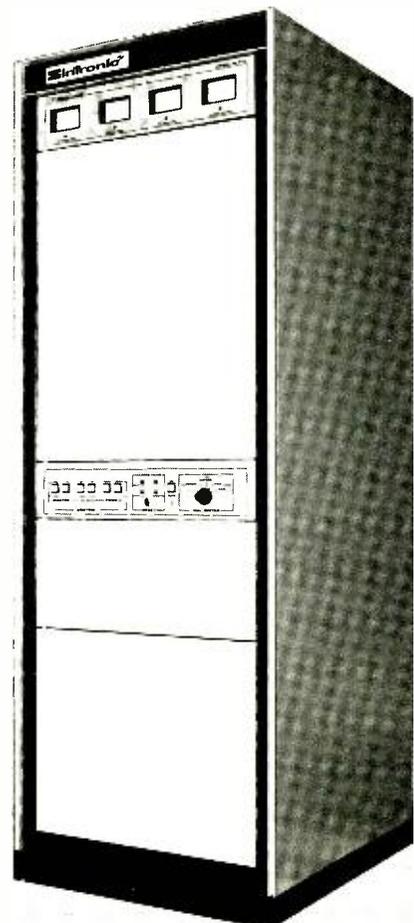

# Profit from the big picture... affordable, airborne ENG



**The Hughes Helicopters 300C** makes airborne Electronic Newsgathering affordable for most stations and marketplaces. The newest addition to the ENG field combines the Ahead of TIME technology of the Hughes 300C and microelectronics to produce the most economical airborne ENG system available.

The 300C's lightweight, durable design has proven its reliability in the toughest applications. All components are engineered for minimum maintenance and low operating costs. With a low initial investment the 300C provides stations with outstanding ENG capabilities. It provides a low vibration platform for better pictures. Its small size,

maneuverability and wrap around cockpit design allows you to follow all the action.

When equipped, with an I.M. Systems installed GHZ-12 watt miniature portable transmitter, the 300C is the most cost effective newsgathering helicopter ever developed with the capability for live or tape delay coverage and ground-air-ground relay.



To obtain the complete picture on the Hughes 300C-ENG and a free demonstration, contact: North American Sales, Centinela & Teale Streets, Culver City, California 90230, USA, or call (213) 305-3054.




**Hughes Helicopters**  
Ahead of TIME Technology

Circle 148 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

Introducing  
NEC's all-new

# MNC-81A

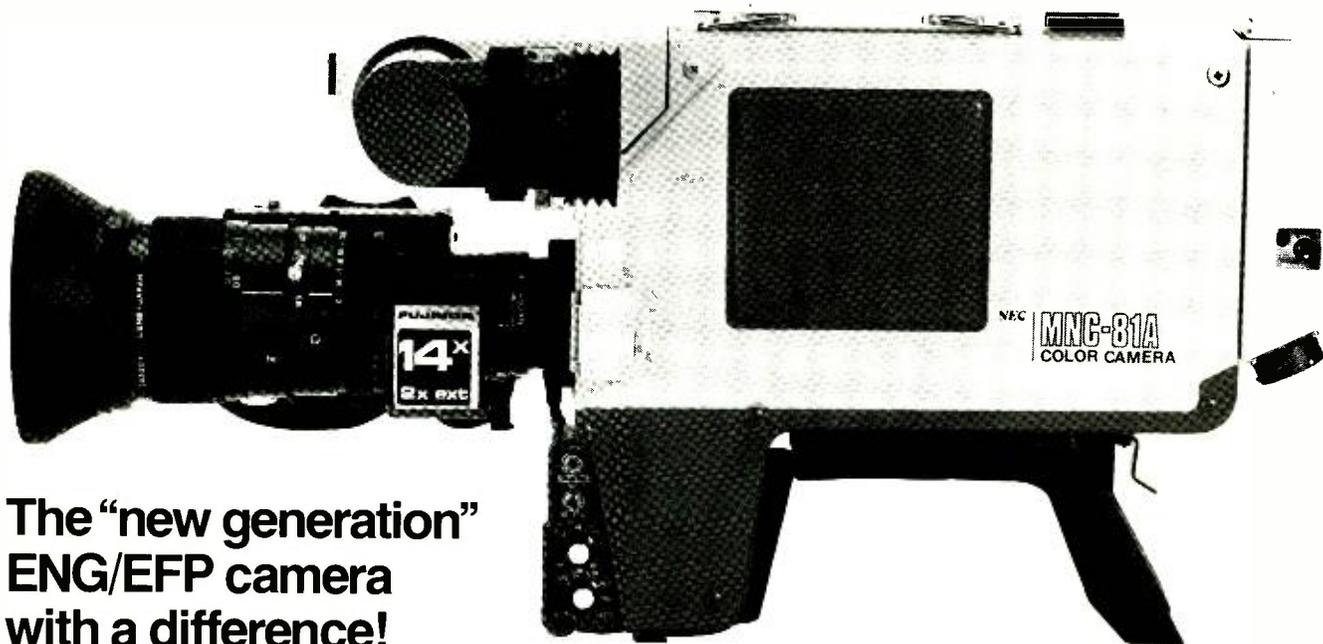

## The "new generation" ENG/EFP camera with a difference!

Get a headstart on the 1980's with NEC's newest "state-of-the-art" ENG/EFP camera: the MNC-81A.

Designed to meet today's more stringent requirements for highest-fidelity color reproduction, the MNC-81A features outstanding colorimetry matched to that of broadcast cameras; with f/1.4 high-transmission prism optics; a choice of pickup tubes: Saticon®, Plumbicon®, or Diode Gun™ Plumbicon®; a signal-to-noise ratio of 54 ( $\pm 2$ ) dB; 4-position gain control with up to +18 dB additional gain for low light level operation; plus all the *automatics*, built-in indicators and features that have become standard for broadcast-quality video cameras. And more.

### The NEC difference...

Extensive use of LSI hybrid microcircuits developed uniquely by NEC makes the MNC-81A extremely stable in registration and performance, and ultra-reliable in circuit operation.

Low-profile and ultra-lightweight — camera head (without lens, but including 1.5" viewfinder) weighs *less than 11 lbs.* and measures approximately 10¼" x 4" x 13½" — the MNC-81A handles with the ease of a compact 16mm newsfilm camera.

It is well balanced on the shoulder, with a form-fitting adjustable base. And its 1.5" viewfinder telescopes for convenient left or right eye viewing.

Best of all, the MNC-81A is a multi-purpose camera with the widest range of options for studio and field operation. Its sophisticated optional remote control

capabilities include a co-ax digital remote control system for distances up to 5000 feet, as well as fiber optics module and cable adapter for fiber optics video transmission from distances up to 9000 feet.

Quite a difference in operational flexibility and versatility compared to other cameras in its class!

### The CP difference...

And, of course, when you buy an MNC-81A, you are automatically covered by Cinema Products' outstanding after-sales service and backup program.

You get an unprecedented full one-year warranty, with no service charge ever for warranty work! You get round-the-clock video service seven days a week. Replacement parts anywhere in the United States within 24 hours... And an easy-term lease/purchase program specifically tailored to your needs.

For complete details on the MNC-81A camera, contact Don Dunbar, Vice President/National Marketing. Call toll-free: 800-421-7468.

Distributed exclusively by:

**cinema E products**  
CORPORATION

*Technology in the Service of Creativity*

2037 Granville Avenue, Los Angeles, California 90025  
Telephone: (213) 478-0711 • (213) 477-1971 • Telex: 69-1339



**MOVING FROM  
HERE TO DIGITAL**

# **FROM ANALOG TO DIGITAL: THE TV PLANT IN TRANSITION**

***Operating the modern television station with a mixture of digital and analog equipment presents a number of problems in planning for the future. Is it possible to plan now for the digital plant?***

MOST CHIEF ENGINEERS are firmly convinced that we are moving rapidly into the digital age. Many are equally convinced that planning for the digital plant is an exercise in frustration. The question of how to plan for a mix of analog and digital equipment over the next decade or so with an eye toward having a digital plant is one that many just don't want to face right now.

"It's nice to brainstorm at conventions about what direction the future technological developments will take," says one chief engineer, "but when you come back to earth you've still got to worry about staying on the air with the equipment that's available."

Steven Smith of Broadcast Technology Consultants feels that the main problem is, "How do you plan for a digital plant when no one has defined what a digital plant is?" Some version of that sentiment was heard in a number of interviews with engineers concerned about the issue. Because of the nature of the problem set forth here—how to run a plant in transition—most of the chief engineers we contacted are in the midst of or have recently implemented major changes at their stations. It was felt that since they were planning new or radically changed facilities, the process of thinking about the future would still be fresh.

Ted Newcomb is the chief engineer at KOCO in Oklahoma City; the station was one of the finalists in *BM/E's* 1980 Best Station competition (December, 1980). Newcomb has thought about the transition plant but is stymied as to how to really proceed. "At the time that you are planning you don't know exactly what is coming up in the future—digital-wise—and how it will interface with the equipment available in this day and age.

"We tried to go with as much digital equipment as possible during the acquisition of equipment for our new building. You try to purchase, for example, a switcher or something like that so you can marry it into a digital system at a later date. You have to follow along that line."

Newcomb feels that, unfortunately, there will be equipment purchases that will have to be made that can't be interfaced with digital equipment that is still in the development stage. He sees that problem for the short

run, within the next two to three years. Trying to avoid that is a real concern, especially with major purchases which can't be written off in that short a period. Newcomb wonders how one can "read the manufacturers' minds on what they have coming up."

What the manufacturers are coming up with seems to be for them at the same level of frustration as their customers. There is the problem of standards. For example, everyone has a favorite approach for digital standards in videotape machines, but until a standard is agreed upon does a manufacturer sink a lot of research dollars into development of a system that might be incompatible with prevailing industry practices?

Those standards, some say, are still down the road—a long way down the road, say the more pessimistic. So what happens in the meantime?


Pete Ford, WTSP-TV, Tampa predicts, "The transition from analog to digital is going to take place on a gradual basis. I think that more and more you will find equipment that has both digital and analog ins and outs... so that you get to the point where you can connect machines digitally or on an analog basis." Ford sees this parallel option as a compromise, but one that deals with the problem of interfacing older equipment with new.

Smith agrees with the parallel approach because he sees the mixture of analog and digital continuing for a while yet. While he won't put a time frame on it, he would not be surprised if the transition from analog to digital weren't still going on into the next decade. Given that, he feels, "The most practical approach to technology is a mixture of analog and digital, and it will probably



*The Ampex 4000 H1 production switcher was chosen at KOCO because digital effects could be added later*

## The TV Plant In Transition

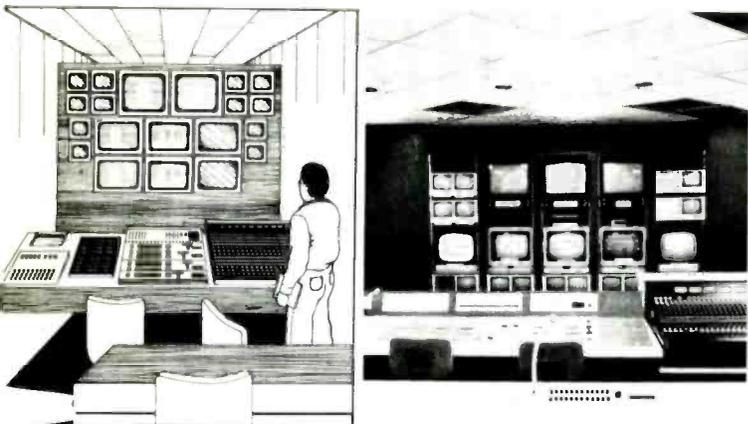

*The artist's conception of the WTSP control room during planning and the reality which had to accommodate change*

be that way for a long time."

Ted Newcomb feels that the discussion of the transition to digital is all well and good, but he is concerned more at this point with the problem of how to maintain the equipment once the standards are agreed to. Engineers who are competent to deal with digital equipment are in great demand right now within the industry. And Newcomb doesn't see the situation getting any better. "Engineers who are really knowledgeable about digital equipment," he notes, "do not seem to be getting into

broadcasting."

Newcomb is not alone in his concern about finding good people who understand digital concepts and equipment. "The people we're hiring today," says Harry Owens of WDVM, Washington, D.C., "have to have strong skills in digital technology."

Ron Arendall, manager of engineering for WTHR-TV, Indianapolis, feels, "There has been a shift of emphasis from the operator to somebody who understands logic and digital circuitry so that he can be able to repair the equipment."


But finding such people is getting harder because everyone recognizes the need and that is leading to intense competition for their services. But the question still remains: if digital is the growth industry everyone believes it to be, why are good digital engineers so hard to come by?

"Number one," says Ted Newcomb, "the wages are more appealing in the computer industry. Secondly, you only have to deal with one piece of equipment—the computer itself. In broadcasting, you have to look at microprocessors and digital equipment of various types. In talking to technical schools, I've found that a lot of the students concentrate on a particular piece of equipment such as a computer and not the variety of equipment that would be called for in broadcasting. Unless the broadcast industry can persuade some of those coming out of colleges and technical schools to go into broadcasting, the problem is going to get worse."

A key question that has to be repeated is: just what is a digital plant? There is no one view, but without it how can one plan effectively? There is lots of digital equip-

# THE BEST MICROPHONES SHOULD BE HEARD, NOT SEEN.

Like our world-famous shotgun microphone that lets you get close-miked quality from far off-camera. And our subminiature electret lavalier that's so tiny you can't see it...and so reliable, you need only one!

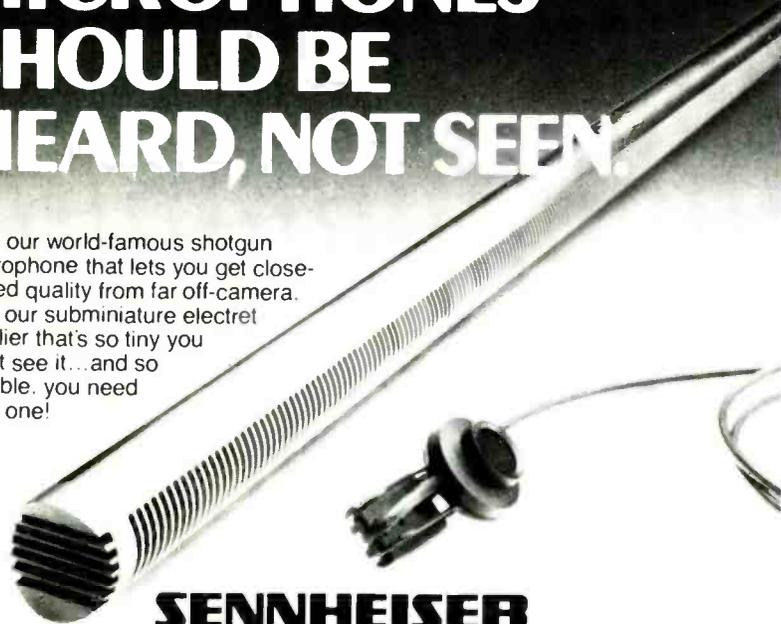

## SENNHEISER

ELECTRONIC CORPORATION  
10 West 37th Street, New York, NY 10018 (212) 239-0190  
Manufacturing Plant: Bissendorf/Hannover, West Germany  
© 1980, Sennheiser Electronic Corporation (N.Y.)

Circle 149 on Reader Service Card

## Field Service Engineers

The Grass Valley Group, Inc. a leading manufacturer of television broadcast equipment, is looking for people who want challenging professional positions PLUS the added attraction of working in a small town nestled in the Sierra foothills.

These challenging positions combine chances for U.S. travel plus marketing and engineering career opportunities. Individuals with experience designing and/or maintaining television broadcast systems are required to provide after-sales support for our wide variety of complex systems.

Interested and qualified candidates are invited to send a resume in confidence to Sylvia Smith, The Grass Valley Group, Inc., P.O. Box 1114, Grass Valley, CA 95945. An Equal Opportunity Employer M/F/H.

**Grass Valley Group**  
A Tektronix Company

**NEC**  
**FS-16**  
FRAME SYNCHRONIZER

ENGINEERING CAPITAL EXPENDITURE BUDGET - CURRENT YEAR

QTY	ITEM	COST
1	FRAME SYNCHRONIZER	\$ 26,000.00
1	SPARE KLYSTRON	55,000.00
1	DIGITAL EFFECTS	74,200.00
1	AUDIO D.A.'S	1,200.00
1	CHROMAKEY GEN.	6,000.00
1	VIDEO D.A.'S	1,800.00
1	TYPE C VTR'S	135,000.00
1	VIDEO SWITCHERS	3,000.00
1	CHARACTER GEN.	50,000.00
1	SERVICE SCOPES	0,000.00
1	A/V ROUTING SWITCH	31,600.00
1	ENG/EFF CAMERAS	88,000.00
1	CONDENSER MIKES	17,000.00
1	PORTABLE LIGHT SETS	1,800.00
1	ENG VANS	1,600.00
1	GAS GENERATORS	19,000.00
1	HEADSETS	6,000.00
1	DIGITAL TBC	2,000.00
1	3/4 VTR'S	13,000.00
1	AUTO DELAY LINES	6,000.00
1	AUDIO AMPS	22,000.00
1	AUDIO DECKS	6,000.00
1	AUDIO MIXERS	2,000.00
1	AUDIO CONSOLE	1,200.00
1	STUDIO LIGHTS	1,500.00
1	PROM PROGRAMMER	3,200.00
1	WORK BENCHES	8,000.00
1	WORK STOOLS	3,000.00
1	RF GENERATOR	1,800.00
1	FREQ. COUNTER	1,500.00
1	SWEEP GENERATOR	10,000.00
1	DIGITAL VOM'S	
1	AUDIO CART MACHINE	
1	AUX BUS FOR SWITCHER	

CAN GET  $\frac{2}{1}$   
FS-16'S FOR  
SAME PRICE !!

TOTAL DEPARTMENT BUDGET \$ 410,800.00  
TOTAL SPENT TO DATE 335,684.00  
REMAINING BALANCE 75,115.50

**NEC**  
NEC America, Inc.

Broadcast Equipment Division  
130 Martin Lane  
Elk Grove, Village, Ill 60007

Write or call for complete specifications.  
Call Toll Free 800/323-6656. In Illinois call 312/640-3792.

## The TV Plant In Transition



ment around, but none of it is really tied together in a real digital system. Steve Smith asks, "Once everything has been digitized, is a digital video switcher a computer or a switcher?"

Some feel that you can't have a real digital plant until the problem is solved of sync, signal routing, and signal switching. The equipment has to be able to talk without going from D to A and back again.

And there is the cost factor. "I can't see paying \$100,000 for a piece of digital equipment just because it's digital when there is improved analog equipment to do the same job at much less cost," commented one chief engineer. It was pointed out that while everyone is saying that the cost of digital is coming down, it is overlooked that the cost of comparable analog equipment is also coming down. According to Steve Smith, "a good analog switcher today is very inexpensive because of the use of digital circuitry."

That brings us back to the mix of analog and digital, which causes many people to be less concerned about planning for the day of the digital plant. Somehow, somehow, it is believed, the problem of going from analog to digital will be dealt with when it has to be dealt with.

It has to be dealt with now. There has to be clear cut direction on which to base your plans for the future. The only way to get the direction is by participating in the process of change.

BM/E

*The need to adapt to change also altered tape/film area from the original vision*

# THE CHOICE IS YOURS!



## THE AUDIOPAK A-2 OR THE STEREO PHASED AA-3 BROADCAST CARTRIDGE

**Capitol Audiopak Broadcast Cartridges—  
for stations who care how they sound.**

Both Audiopak carts offer extremely low wow and flutter; a positive brake system which stops the tape, not the hub, assuring accurate cueing. Unsurpassed reliability is assured because we manufacture the tape and all other components in the cartridge. Moreover, all carts are 100% tested before shipping.

The AA-3 offers excellent stereo phase stability. It's loaded with Capitol's own Q17 HOLN tape which extends frequency response and headroom to provide studio sound quality.

CAPITOL MAGNETIC PRODUCTS  
A Division of Capitol Records, Inc.  
6902 Sunset Blvd.  
Hollywood, California 90028

See us at NAB Booth 506

Capitol®

©1980 CAPITOL RECORDS, INC.

Circle 152 on Reader Service Card



## You wanted a low cost, high quality TBC Framestore Synchronizer? Now you've got it! The Microtime 2520

Now there's a TBC/Framestore Synchronizer that combines superior performance and low cost while maintaining the same high standards for quality built into all Microtime digital video and video processing equipment.

The 2520 is designed for use in broadcast and sophisticated industrial, educational, and CATV applications. It synchronizes network incoming and remote satellite feeds — all locked to station and provides the capability to handle any 1/2" or 3/4" heterodyne VTR with or without capstan servo.

On location the 2520 provides hot switching of multi-camera feeds with highly transparent performance.

The unit will function as an infinite window Time Base Corrector with Microtime's exclusive Hetrocolor™ circuitry for transparent heterodyne VTR processing.

Use it in the studio as a dedicated TBC for feeding remote VTR video for lock to station or live playback on air. No advance reference link to VTR is necessary — just a single cable video feed via Telco, microwave, or satellite.

The optional remote control panel provides the choice to freeze either field one, field two or a full frame of video.

With the 2520 you can have high quality plus the superior performance of a framestore synchronizer for under \$19,000.

In addition to the 2520, Microtime also manufactures the broadest range of Time Base Correctors and Synchronizers anywhere — your choice of processors starting for under \$5,000.

Contact your nearest Microtime Distributor or call us directly for a product demonstration and complete details.

 **MICROTIME**

MICROTIME, INC., 1280 Blue Hills Avenue, Bloomfield, CT 06002 • (203) 242-4242 • TWX 710-425-1165

Circle 153 on Reader Service Card

# THE FACTS ARE IN...

## The **isi** 200 Series with PolyKey<sup>®</sup> is today's truly advanced switching system.

### FACT:

Our 200 Series is available in three different configurations (shown) providing the right size switcher for any facility.


### FACT:

Every 200 Series switcher is built around the amazing PolyKey effects (PKE) unit. Unmatched flexibility allows complex transitions like two edged title keys over a bordered wipe behind a chromakey to be performed with speed, accuracy, and simplicity.


Standard features in every PKE include four input busses, auto transitions, internal quad split, title key over/under, video and chroma keying, black/white/color key edging, rotary and spin wipes - and more!

### FACT:


The Downstream Transition Unit on the 200 Series Switchers includes items you'd expect to pay extra for - but don't with ISI: 'flip-flop' mixer with auto mix and cut bar, colorized DSK with edging, master fade-

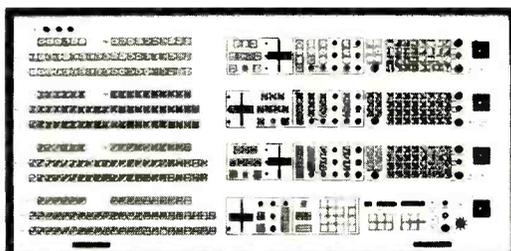

ISI 200-3 Production Switcher

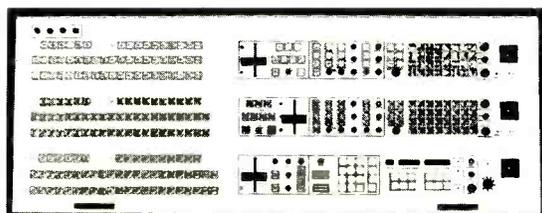

ISI 200-2 Production Switcher

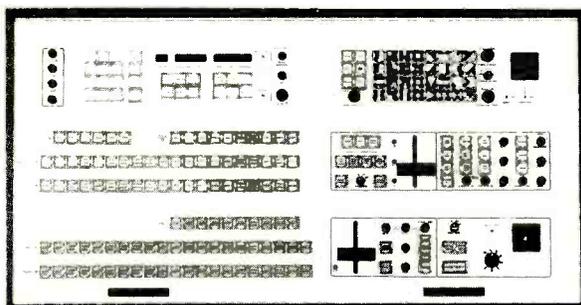

ISI 200-1 Production Switcher

to-black with pulse processing, and our exclusive 8 position pointer. A 200 Series Switcher is a total package.

### FACT:

Our optional A.P.E. (Automated Production Effects) offers storage and retrieval of manually executed control panel functions. And with vertical interval recall of 3840 events per disc in our dual 'floppy' system, retrieval is smooth, fast, and flawless.

### FACT:

Whether your facility is a broadcast operation, production house, or industrial user, and no matter what your application - production, remote, or post production - we've got the 200 Series Switcher that's just right. All with ISI's two year warranty and total commitment to service.

Call us toll free for more information and the name of your nearest authorized ISI professional video products distributor.

Available in NTSC & PAL.

## Innovative Switching Ideas.



**INDUSTRIAL SCIENCES INC**

P.O. Box 1495 / Gainesville, Florida 32602

Toll Free: (800) 874-7590

Florida Only: (904) 373-6783

# Broadcasters To Be Careful Consumers In 1981

The 11th Annual Panels of 100 Survey of Broadcast Industry Needs reveals radio and television's "most wanted" products for 1981.

AS INTEREST in the 59th Annual Convention of the National Association of Broadcasters (Las Vegas, April 12 through 15) builds, thousands of broadcasters are preparing themselves for their first hands-on exposure to this year's crop of new broadcast equipment. While both radio and television broadcasters will pour over new production equipment as usual, this year they will also show their first concrete interest in earth station equipment. Some 80 percent of television broadcast respondents and some 62 percent of radio respondents listed earth station equipment on their "most wanted" list.

Generally, however, broadcasters showed more restraint this year, spreading their interests out more evenly over the four equipment areas: production, control, transmitting, and test and measurement. In television, production equipment still took the lead by a considerable margin, with 44 percent of all television respondents saying that they would concentrate on acquiring equipment in this area. Radio broadcasters listed production equipment as their area of greatest interest 31 percent of the time. Both groups gave high marks to T&M equipment (TV, 23 percent; radio, 24 percent), but here the figures are skewed by the lopsided contribution of engineers who cited interest in T&M three times more frequently than did their management counterparts. Active interest in control and transmitting equipment was nearly evenly split by both television and radio broadcasters. Television respondents cited both control and transmitting equipment 19 percent of the time, while radio cited control 23 percent and transmitting 22 percent.

The survey, which polled 1540 top broadcast engineers and managers in large markets and small and received a response rate of just over 32 percent, asked broadcasters to give their opinions on specific products and general industry trends (see page 86). In television, it became clear that many stations have completed their move to all-ENG, with 15 percent of stations expecting to complete the move within the next two years. Radio

broadcasters continued to expect some movement toward AM stereo, with 28 percent stating that they expected it to have the greatest impact on their operation over the next two years. Generally, however, the continued computerization of broadcast operations drew the highest level of concurrence between radio and television respondents, with 25 percent of radio and 32 percent of television broadcasters citing this as the most important near-term trend.

In general, managers expressed a greater faith in automation than did engineers, particularly in business automation. In radio, for instance, 49 percent of managers listed business automation as highly desirable, while engineers listed it only 30 percent of the time. Technical automation, on the other hand, enjoys broad support from both engineering and management. In television, switching automation was cited as desirable 49 percent of the time by managers and 57 percent of the time by engineers for an overall interest level of 54 percent.

While interest in computerized equipment (and as the preceding articles in this issue show, digital equipment in all its many forms) will be of increasing importance, broadcasters are likely to make the shift only as they make major overhauls in their systems. Asked if such major renovations or construction of new facilities were planned for the next two years, 23 percent of both radio and television broadcasters answered, "yes."

This year, however, the responses to particular equipment interest were more cautious. During the past three survey years, certain products in both radio and television showed distinct signs of consumer enthusiasm, with large numbers of respondents checking off extreme levels of interest. This year, when asked to indicate their level of interest as "very interested," "some interest," "low interest," or "no interest," the spread concentrated across almost all product categories at the "some interest" level. While the interest level is there, converting it to buying activity will require greater efforts on the part of equipment marketers.

"No-Stretch"  
Phillystran® HPTG

**the only  
flexible  
FIELD  
PROVEN  
electrically  
transparent  
tower-guy system**

**1.** eliminates EMI and RFI at broadcast sites

**2.** simplifies installation of AM, FM, AM directional and TV towers. Lightweight, flexible, yet as strong as extra-high-strength galvanized steel\* . . . negligible creep, negligible elongation with new HPTG\* for tension-once and walk-away installations.

**3.** maintenance free. Non-conducting, non-corroding, nonmetallic. No internal corrosion. No white-noise arcing across insulators. No insulators required.

**4.** no more expensive re-guying.

\*Comparative stress-strain data and information about other physical properties available on request.

**Call/write for:  
10 REASONS WHY  
YOUR BEST BUY IS  
PHILLYSTRAN®  
and the new  
PHILLYSTRAN® HPTG**



**PHILADELPHIA  
RESINS CORP.**

20 Commerce Drive  
Montgomeryville, PA 18935  
(215) 855-8450

*a small company  
doing big things worldwide  
in a quiet way.*

Circle 155 on Reader Service Card

BM/E FEBRUARY 1981 85

## Panels Of 100 Survey

### Overall Interest In Radio Equipment

Rank		Percent Actively Interested <sup>1</sup>
'81	'80	
1	2	Consoles, Mixers ..... 77
2	1	Tape Recorders/Players (studio) ..... 72
3	5	Test Equipment ..... 71
4	6	Audio Processors ..... 65*
5	4	Cartridge Players/Recorders ..... 64
6	3	Remote Pickup & STL ..... 63
7	NL	Earth Stations ..... 62
8	11	Noise Reduction Systems ..... 60
9	9	Antennas ..... 49
10	14	FM Monitoring Equipment ..... 49
11	16	Automation Equipment ..... 48
12	NL	Telco Interface Equipment ..... 47
13	13	FM Transmitters ..... 47
14	12	Turntables ..... 45
15	15	Tape Recorders/Players (field) ..... 44
16	10	AM Transmitters ..... 43
17	20	AM Monitoring Equipment ..... 41
18	18	ATS Equipment ..... 41
19	19	Monitor Speakers ..... 39
20	21	Reverb & Special Effects ..... 34
21	17	Business Automation Systems ..... 30
22	22	FM Quad Equipment ..... 13

<sup>1</sup>Percentage checking "very interested" or "some interest."  
 \*Indicates those products which showed the greatest intensity of interest; that is, degree of interest was weighted towards the highest end of the scale by a wide margin.  
 NL stands for New Listing.

### Overall Interest In TV Equipment

Rank		Percent Actively Interested <sup>1</sup>
'81	'80	
1	2	VTRs (one-inch) ..... 81*
2	NL	Earth Station Equipment ..... 80*
3	1	TV Cameras, ENG ..... 76
4	8	Digital Effects Devices ..... 75
5	7	Test Equipment ..... 73
6	3	Videotape Editors ..... 71
7	4	VTRs (3/4-inch) ..... 70
8	9	Frame Synchronizers ..... 68
9	5	Microwave for ENG ..... 67
10	10	Video Monitors ..... 65
11	11	TV Cameras, EFP ..... 65
12	12	Electronic Still Stores ..... 64*
13	16	TV Cameras, Studio ..... 65
14	21	Routing Switchers ..... 61
15	25	Film and Slide Chains ..... 56
16	23	Production Switchers (large) ..... 56
17	18	Production Switchers (small) ..... 61
18	17	Noise Reduction ..... 56
19	24	Remote Control (status, etc.) ..... 56
20	14	Switching Automation ..... 54
21	22	Character Generators ..... 53
22	13	Audio Consoles, Equipment ..... 52
23	20	Time Code Equipment ..... 51
24	27	ATS Equipment ..... 51
25	26	Image Enhancers ..... 50
26	19	Lighting Equipment ..... 50
27	NL	Vehicles, ENG/EFP ..... 49
28	28	CP Antennas ..... 42
29	30	Transmitters ..... 37
30	31	VTRs (quad) ..... 22

## LOOK WHO'S RUNNING CBS



### Chrontrol.

Running a television network means keeping a lot of records, and accuracy is of prime importance when thirty seconds worth of time can cost considerably more than most people earn in a year.

At the CBS television network in New York City, engineers have been frequently stymied trying to track the times certain readings were registered on rolls of graph paper. Because the machinery could not be synchronized to a clock or one another, it was most often impossible to time-log accurately the data collected.

### Enter Chrontrol:

By connecting a Chrontrol to each chart needle, a signal can electronically command the chart recorders to stop and record a line every two hours.

Now, no matter how quickly or slowly the chart paper passes over the mechanical motors, engineers can pinpoint precisely what time it was when the chart was recorded. If you are interested in regulating sequential operations to the second, Chrontrol is something you should keep your eye on.

## CHRON TROL

Please call or write for additional information: Lindburg Enterprises, 4878 Ronson Court, San Diego, CA 92111, (714) 292-9292, TLX/TWX 910-335-2057. Time was. Chrontrol is.


Circle 156 on Reader Service Card

**AUDIO COMPONENTS**  
**FOR PA, RECORDING & LIVE PERFORMANCE**

ADA-1  
 FOUR CHANNEL ACTIVE AUDIO DA



LS-1  
 LINE LEVEL SPLITTER



SB-1  
 STEREO BALANCE BOX FOR PROPERLY MATCHING TAPE RECORDERS & OTHER EQUIPMENT



Send For Your Free Copy Of Our Catalog




**SESCOM, INC.** (702) 384-0993  
 Professional Sound Division (800) 634-3457  
 1111 Las Vegas Blvd. North TWX 910-397-6996  
 Las Vegas, NV 89101 U.S.A.

Circle 157 on Reader Service Card

# TIRED OF PATCHING FEEDS TO THE GM'S OFFICE?

(OR TO OTHER OFFICES, CLIENT VIEWING ROOMS, EDIT SUITES, ETC.?)

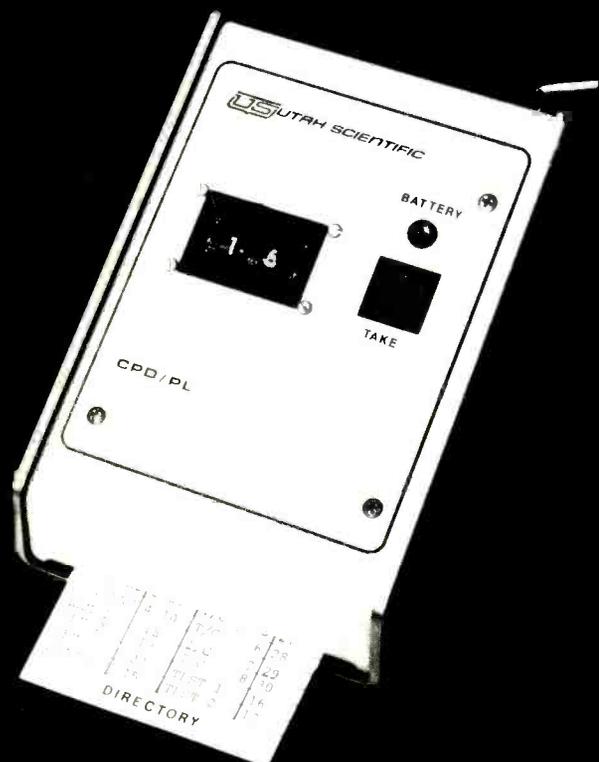

Give them one of these  
Utah Scientific Routing  
Switcher Controllers  
and let them do  
their own patching.

Utah Scientific's new CPD/PL control is a Party Line panel with a single coax control connection — no bulky cables to install. It is powered by a transistor radio battery providing many years life expectancy. It features a pull-out directory to aid the operator in source selection.

Since multiple CPD/PL's can all be connected to a single party line, many stations are installing coax drops throughout their plants giving them complete flexibility for present and future routing switcher control using these versatile panels.

SINGLE COAX CONNECTION — BATTERY POWERED — UNOBTRUSIVE

**TRY THAT ON YOUR GRASCOMFERNSAM DYNATEK SWITCHER!**

**US UTAH SCIENTIFIC**  
THE ROUTING SWITCHER PEOPLE.

2276 So. 2700 W. • Salt Lake City, UT 84119 • Phone 801-973-6840  
TWX #910-925-4037

Circle 158 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# DYNAMIC NEW DIMENSIONS IN VISUAL PRESENTATION

## —with General Electric Professional Large Screen TV Projection



**IN TV PRODUCTION**—General Electric color projector displays rear-screen program material, and can be used for unusual special effects.



**IN ENTERTAINMENT**—A General Electric color TV projector brings large screen race action to Ontario Jockey Club, near Toronto, Canada.

General Electric professional large screen television projectors—displaying color or monochrome pictures up to 25 feet wide—bring new dimensions of presentation impact to a broad spectrum of applications.

A wide choice of new and improved color and monochrome models is available to meet specific requirements for television display applications, in standard or high brightness, for various scan standards.

The color projectors utilize General Electric's exclusive single optical path light valve. All color information is projected simultaneously in one light beam. This system eliminates time-consuming registration of three separate images which is required for all other color television projectors.

These projectors can display any size television picture from two feet to 25 feet wide, with high resolution and contrast over their full range of light output.

Among the primary applications of the projectors are:  
**Medical and Dental Education.** Technique and procedural training.

**Business.** Sales meetings, industrial training, product presentations, real-time display of computer-generated data, satellite-transmitted conferences.

**Aerospace and Defense.** Situation displays, simulator training.

**Entertainment.** Theatre television and closed-circuit TV events, overflow crowds, discotheque special effects.

**Television Production.** Backgrounds for news programs, special effects, data display, program previewing.

Call or write: General Electric Company, Video Display Equipment Operation, Electronics Park, 6-206, Syracuse, NY 13221. Phone (315) 456-2152.



**IN SALES**—General Electric color TV projector dramatically displays new product highlights at Keepsake® Diamond Rings annual meeting.



**IN THE BOARD ROOM**—At Mellon Bank, N.A., Pittsburgh, General Electric color projector displays computer data, graphs and information.

**GENERAL**  **ELECTRIC**

Circle 159 on Reader Service Card

## Panels Of 100 Survey

### Radio's "most wanted" in 1981

As in the years past, radio broadcasters showed their greatest interest in the staples of their business—console/mixers, studio tape recorder/players, test equipment, audio processors, cart player/recorders, etc. Few radical changes were noted, with the exception of interest in earth station equipment. This was the first year that this equipment was noted and it shot immediately to the number seven position on the list. Also new to the list in 1981 is telco interface equipment, which took the twelfth position on the list.

For the remainder of the products noted, some rank adjustments were indicated but rarely more than a rise or fall of four positions. It is important to note that the rank of a product shows little more than the intensity of interest in that particular product relative to all other products listed. A fair analysis would show only that broadcasters need "product A" more than they need "product B," though both products are in demand. This analysis is supported by the fact that few products received high levels of "no interest" with the exception in radio of FM quad equipment, a technology whose time has not come in the minds of most broadcasters.

### TV's "most wanted"

Like their radio counterparts, the staples of the industry tended to take the lead positions. Television broadcasters listed one-inch VTRs, ENG cameras, digital effects, test equipment, and videotape editors high on their lists as usual, indicating their continued expansion of production capacity. A surprise entry in the "most wanted" list was earth stations, which took second place. Even more surprising was the intensity of interest among television broadcasters. Forty-four percent of television engineers and 47 percent of television managers gave earth stations their highest level of interest.

An analysis of the full figures indicates as well that, after several years of concentrating on developing their field production capacity, television broadcasters are beginning to pay attention to their studio facilities. While interest remains high in field production and ENG equipment, nearly every studio class of equipment showed increased interest this year.

In next month's issue, *BM/E* will preview the products to be introduced at NAB. Readers will be able to get an idea of how manufacturers are responding to their 1981 needs. **BM/E**

# MORE RACK SPACE LESS FLOOR SPACE



Ruslang's new RL 2000 VTR Console offers more rack space while taking up less floor space. Constructed of quality materials, this compact unit is attractive and sturdy with the look of expensive walnut furniture. Other wood grain finishes and solid colors to complement your studio decor are available. Add a standard 10½" monitor overbridge that can be expanded to give even more rack space, plus an optional, easy to take off back panel, and you now have the most versatile and best looking console on the market at a fraction of the cost of steel. For complete details, contact . . .

## RUSLANG CORP.

247 Ash Street, Bridgeport, CT 06605 Tel: 203 384 1266

Circle 187 on Reader Service Card

BM/E FEBRUARY 1981 89

# Don't let your station sound like a phone booth.



Every broadcaster knows the problems of on-air telephone links. The garbling when announce-feeds go out simultaneously through the board and the phone. Or the mysterious cutoffs in the middle of an important interview when line noise or sibilants generate 2600 Hz for a disconnect signal.

A lot of stations—network flagships and others—who've had to face the problems have also found the answer: the Studer Telephone Hybrid.

With sidetone attenuation of up to 40dB, producing maximum isolation between send and receive circuits through an active self adjusting bridge network, and a 12-Henry choke on the input to ensure positive exchange lock-in, the Studer Telephone Hybrid is simply designed to do the job right. 30dB/octave receive and 12dB/octave transmit filters eliminate unwanted signals that would muddy the on-air clarity you've built into your station. All phone line requirements are automatically matched, and a built-in limiter

and white-noise generator are included to give you adjustable overload protection and privacy. All in a 1 $\frac{3}{4}$  inch rack mount unit.

Studer can ensure a clean link for all your console feeds. The Telephone Hybrid maintains air quality on telephone talk shows, news feeds, and phone interviews. And our active-circuit Stereo Balancing Unit couples balanced ins and outs to single-ended recorders, equalizers, limiter/compressors or other unbalanced gear.

For more information on how to keep your station from sounding like a "wrong number," call or write today.

## STUDER REVOX

Studer Revox America, Inc.  
1425 Elm Hill Pike, Nashville, TN 37210, (615) 254-5651  
Offices: Los Angeles (213) 780-4234 / New York (212) 255-4462  
In Canada: Studer Revox Canada, Ltd.

Circle 161 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# INTERPRETING THE **FCC** RULES & REGULATIONS

## Time Brokerage Satisfies Some Minority Programming Needs

By Frederick W. Ford and Lee G. Lovett; Lovett Ford and Hennessey, P.C., Washington, D.C.

TIME BROKERING and part-time programming might be solutions to the problem of often ignored minority audiences, according to the Commission in a recently published policy statement.<sup>1</sup> The Commission found that although the growth of television and the modification of radio stations have tended to narrow the programming focus of radio stations, “[t]here are, nonetheless, some specialized audiences whose tastes continue to go unmet because they are too small to support an entire weekly schedule of such programming.”<sup>2</sup> This is apparently especially true of foreign-language audiences. More flexible time brokerage and time sharing arrangements could in turn foster the development of programming more responsive to these “specialized audiences.” Moreover, the FCC considers this policy statement as another in its series of shifts from regulatory mandates to competitive incentives for broadcasters.

This column will examine these new developments, as well as review some pitfalls licensees might encounter with time brokerage and part-time programming.

### What is time brokerage?

The Commission defines time brokerage as “the practice of licensee sale of discrete blocks of time to a ‘broker’ who then supplies the programming to fill that time and sells the commercial spot announcements to support it.”<sup>3</sup> Such practices have been common in larger markets since before passage of the Communications Act in 1934. Many radio licensees in larger, more diversified markets provide several hours weekly of such programming as a result of time brokerage. Such specialized programming dominates the schedule of some licensees. In the largest markets, there are brokered television programs on television stations as well.

As many licensees have already discovered, the generally low cost of such programming makes it an attractive way of reaching otherwise unserved listeners or viewers. Often the broker is also producer and host, thus cutting costs. Also, the brokered program is effectively subsidized by the broker/producer’s acceptance of lower compensation than would be required for most commercial programs.

Previously, the Commission had no routine for administrative review of such operations. Although licensees will have to continue to place time brokerage contracts in the local public inspection file, the Commission does not propose any new formal reporting requirements or procedures.

### Part-time programs for minority audiences

The lack of any systematic reporting has apparently made it difficult to establish firmly any conclusions about part-time programming and time brokerage. However, a Library of Congress study of radio formats and operations other than black or Hispanic found a substantial number of such programs, as well as considerable ethnic variations between markets. The study estimated that at present there are approximately 7000 weekly broadcasts totalling more than 2000 hours of such programming and that *industry publications fail to report more than 50 percent of this*.<sup>4</sup> Other Commission studies have found that although there are only some 120 black-owned broadcast stations in the nation, at least 415

<sup>1</sup> *Policy Statement On Part-Time Programming*, BC Docket No. 78-355, FCC, Mimeo No. 80-621, \_\_\_ FCC 2d \_\_\_, Adopted October 21, 1980; Released November 13, 1980.


<sup>2</sup> *Id.*, para. 31.

<sup>3</sup> *Id.*, footnote 2.

<sup>4</sup> *Id.*, paras. 7-8.

# The Trend Setter

When It Comes To Professional Editing,  
VANGUARD Creatively Does It All

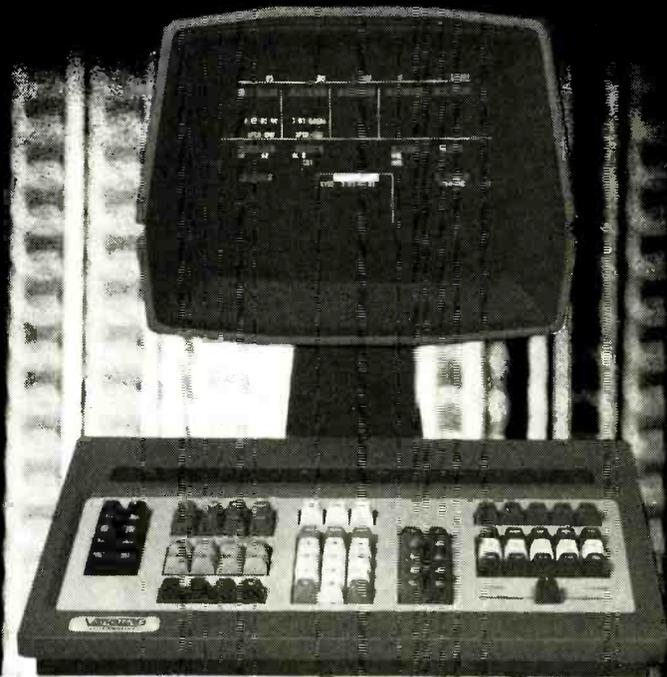

- Controls 5 VTRs plus switcher and DVE
- Performs A/B rolls and A/B/C/D sync'd rolls
- NTSC/PAL/SMPT/EBU code or control track operation, insert or assembly
- Interfaces for over 40 types of tape decks and film chains
- Dual VaraScan™ variable speed tape search controls
- 999 event edit list memory
- Uncomplicated, powerful edit list management
- Auto-assembly from up to 4 sources

- Paper tape or floppy disk edit list I/O in industry-standard formats
- Five-tier time code scratchpad memory
- Built-in scratchpad time code calculator performs mixed drop/non-drop frame addition and subtraction
- Edit and split times can be marked on-the-fly or keyboard-entered
- Auto-tag, with override
- Well organized editing status display on eye-soothing green CRT screen; dedicated function, color-coded keyboard
- Selectable preroll, postroll and reaction time

datatron, inc.  
datatron, inc.  
datatron, inc.  
datatron, inc.  
datatron, inc.  
datatron, inc.

Vanguard leads the way in giving creative editing professionals innovative new editing system features that add new dimensions to the editing craft. Latest in a long list of Datatron firsts is SmartScan™ learn mode variable motion editing. This feature opens the door to a dazzling array of slow-mo, high-speed and freeze-frame edit effects. SmartScan lets you speed the action up, slow it down, freeze it or change directions, all with a single slide control; every move you make is memorized by the Vanguard system, faithfully repeated in your next edit, and reflected in the edit decision list. Perform freeze-frame edits automatically, with or without



subsequent learned motion: compress or expand edit segments to fill time slots — automatically; select exact, calibrated play speeds for your VTRs over their full speed range. All this and more can be accomplished quickly and easily with Vanguard's SmartScan feature. There simply isn't another editing system you can buy that comes close to Vanguard's capabilities. BE A TREND SETTER; GET A VANGUARD

Datatron, Inc./Video Systems Division  
2942 Dow Avenue, Tustin, Calif. 92680  
(714) 544-9970 TWX 910-595-1589

## datatron, inc.

MAKING CREATIVE EDITING AFFORDABLE

Circle 162 on Reader Service Card

## FCC Rules and Regulations

stations offer black-oriented programming.<sup>5</sup> Weigel Broadcasting Co., licensee of WCIU-TV, Chicago, noted in its comments that even the larger minority groups in Chicago could not support full-time specialized programming. So, even for such large and concentrated minorities as Chicago's Polish-speaking or Southern Massachusetts's Portuguese-speaking minorities, time brokerage is perhaps the best and possibly only option for news and entertainment in a foreign language. The FCC has concluded that a general need exists for such programming and time brokerage provides a flexible response to meet the particular needs in individual markets with varying amounts and types of programming.

### No further regulation but continued responsibility

The Commission did conclude that no more regulatory procedures would be necessary and that existing procedures would suffice. However, the Commission cautioned that this decision does not lessen the responsibility of licensees to maintain overall control of programming decisions. Nor does the policy statement change the requirement that part-time programmers and brokers comply with the Communications Act and applicable FCC rules.

The Commission recalled the case of Cosmopolitan Broadcasting Co., which lost a radio license in New Jersey because it had abdicated its responsibility to maintain control over the station's programming.<sup>6</sup> Although the Court of Appeals remanded the case to the Commission, neither the court order nor the supplemental FCC decision suggested "that time brokerage relieves a licensee of its responsibility for programs thereby presented."<sup>7</sup>

The Commission determined that it would be far simpler to ensure compliance with the Communications Act and its rules if enforcement efforts were focused on the licensee's responsibility. According to the Commission:

The independent broker may not be concerned with the license renewal processes or with economic sanctions that can be levied against a substantial capital investment. The licensee, however, would be, and this encourages licensees to broker time only to responsible entrepreneurs and to become involved actually in supervision of their activities. We believe that licensees must expect to retain control over, and responsibility for, all programming if they wish to remain public trustees...<sup>8</sup>

Shifting overall programming responsibility to brokers would create serious problems including those arising out of a need to have all such agreements filed with the FCC. However, "we do not intend to relieve brokers of their responsibility to avoid rule violators."<sup>9</sup> Forfeitures can also now be assessed against any "person" who violates the Communications Act because of changes in the Act in 1978.

### Related matters

Several related matters in this proceeding of interest to broadcasters include (1) special credit in equal employment opportunity reporting for licensees who encourage

<sup>5</sup> *Id.*, para. 12.

<sup>6</sup> *Cosmopolitan Broadcasting Corporation*, 59 FCC 2d 558 (1976), *recon. denied*, 61 FCC 2d 257 (1976).

<sup>7</sup> *Policy Statement*, *supra*, footnote 8.

<sup>8</sup> *Id.*, para. 15.

<sup>9</sup> *Id.*, para. 16.

## We've racked up a winner!




QUANTAFONT Model Q-7A Titler now available with 19 inch rack mount electronics and keyboard remote up to 500 feet with delegate control for multiple keyboard locations.



System Concepts, Inc.  
2440 South Progress Drive  
Salt Lake City, Utah 84119  
Phone: (801) 974-0992  
TWX 910-925-5684

Circle 163 on Reader Service Card

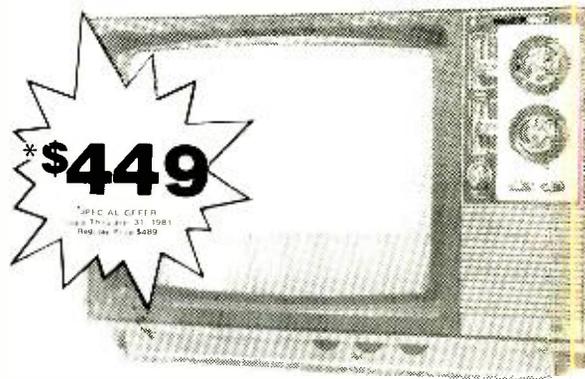

VM-13

## COLOR MONITOR/RECEIVER


*Two Modes of Operation for The Price of One*

- Standard composite video/ 75 ohm term.
- Transformer isolated for safety.
- External audio input with control.
- Power Requirements: 117 VAC 60 Hz.
- VM-19, 19" diagonal screen, \$575.00.
- For professional, industrial, home video applications.

V.A.M.P. Inc.

P.O. BOX 29315 • LOS ANGELES, CA 90029 • (213) 466-5533

Circle 164 on Reader Service Card

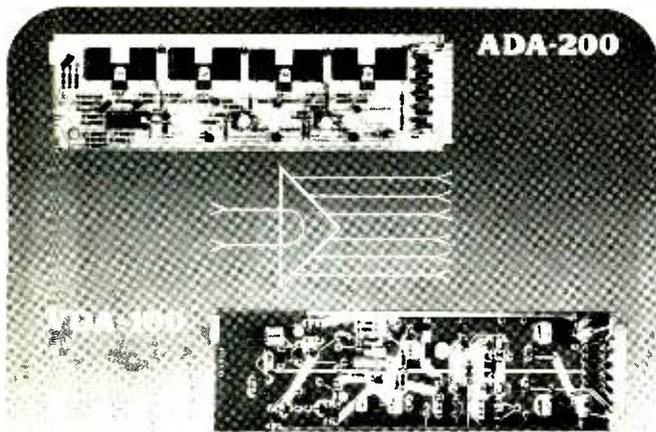

## Uncompromised Performance

**VDA-100 Video DA** Six outputs, looping input,  $\pm 0.1$ dB response to 5Mhz. 0.1%  $\Delta G$  with six loads, 0.1°  $\Delta \phi$  with six loads. Cable equalization for up to 100ft. of RG 59/U. Signal/Noise Ratio >70dB. Useable as Subcarrier DA. Eight DA's plus dual power supplies in a 2-RU frame.

**ADA-200 Audio DA** Six balanced +24dBm outputs,  $\pm 0.05$ dB response from 20Hz to 20kHz. THD <0.05% @ +24dBm. Signal/Noise Ratio >100dB. Balanced/Unbalanced input. Wide bandwidth allows time code distribution. Eight DA's plus dual power supplies in a 2-RU frame.

HEDCO

STOCK DELIVERY

916/273-9525

P. O. Box 1985

Grass Valley, CA 95945

Circle 165 on Reader Service Card



# THE WINNER

**When Purchasing/Renting/Leasing/Servicing  
Video Communications Equipment  
In California, Mexico And Central America**

We are the major distributor and factory authorized service centers for the most respected manufacturers:

**SONY, PANASONIC, HITACHI DENSHI, SANYO,  
RCA, JVC, VICON, PELCO AND MANY OTHERS.**

Four strategic locations fully staffed with the most qualified sales engineers, and video technicians.

## INSTANT REPLAY EQUIPMENT CO.

**LOS ANGELES (213) 870-9435 390-4417**

5520 Westlawn Ave., L.A., Ca. 90066

**CHATSWORTH (213) 998-4124 (805) 492-3513**

9848 Desoto Ave., Chatsworth, Ca. 91311

**ANAHEIM (714) 632-7744**

1072 Kraemer Pl., Anaheim, Ca. 92806

**MEXICO (905) 536-0607 536-0663 536-0245**

San Francisco #1208, Col del Valle, Mexico 12, D.F.

Circle 166 on Reader Service Card

## FCC Rules and Regulations

brokerage of minority-oriented programming and (2) political advertising incentives.

Opportunities in broadcasting for women and minorities could be expected to increase because of increased time brokerage of minority-oriented programs produced by women and minorities. However, any formal reporting requirements might prove a disincentive. Therefore, the Commission concluded that:

[I]t is conceivable that situations will arise in which it would be reasonable to consider the time broker's employment profile and practices in judging the licensee's affirmative action efforts... Accordingly, we welcome the submission of supplemental EEO information on a *voluntary* basis where the licensee considers it necessary to portray fully its affirmative action efforts.<sup>10</sup>

With respect to political advertising, Section 315 of the Communications Act requires that licensees offer advertising time to all candidates at the lowest unit rate at which the same class and quantity of time has been sold. Time brokers generally set lower commercial rates commensurate with smaller, more specialized audiences. Sales of time by a time broker to a political advertiser would tend to lower the licensee's lowest unit charges.

Previously, the Commission has disregarded brokers' rates in determining the lowest rates of individual stations. This policy ignored distinctions between a licensee's regular programming and brokered time and this factor has prevented brokers from deriving the benefits of political advertising.

First, under the terms of Section 315, time brokerage can be considered a separate "class" subject to different "lowest unit charge" requirements. A licensee must make a determination based upon the programs themselves.

[A] licensee that carries one general audience format but brokers time for another general format could not establish a different lowest unit charge for each [format]. On the other hand, a *general format station that brokered time for specialized minority in foreign language programming could show that the audience differences were such that establishment of different lowest unit charges would be reasonable.*<sup>11</sup>

So, such decisions will be left to the discretion of the licensee, subject to FCC review under the requirements of Section 315. It is the Commission's opinion that this approach would benefit all parties concerned: licensees, time brokers, and political candidates.

### Conclusion

The policy statement does not add new rules to the Commission's rules and regulations. By its very nature, a policy statement outlines a statement of the intent of Commission policies and practices. In this case, the Commission has reaffirmed its commitment to time brokerage as one means of meeting minority programming preferences.


Broadcasters cannot forget their responsibility over all programming on their respective stations. And the question of political advertising at the lowest unit rate might prove a thorny question for some. Any problems in this regard should be referred to communications counsel for proper analysis.

BM/E

<sup>10</sup> *Id.*, para. 21.

<sup>11</sup> *Id.*, para. 23.

# LISTEN TO THE DIFFERENCE.

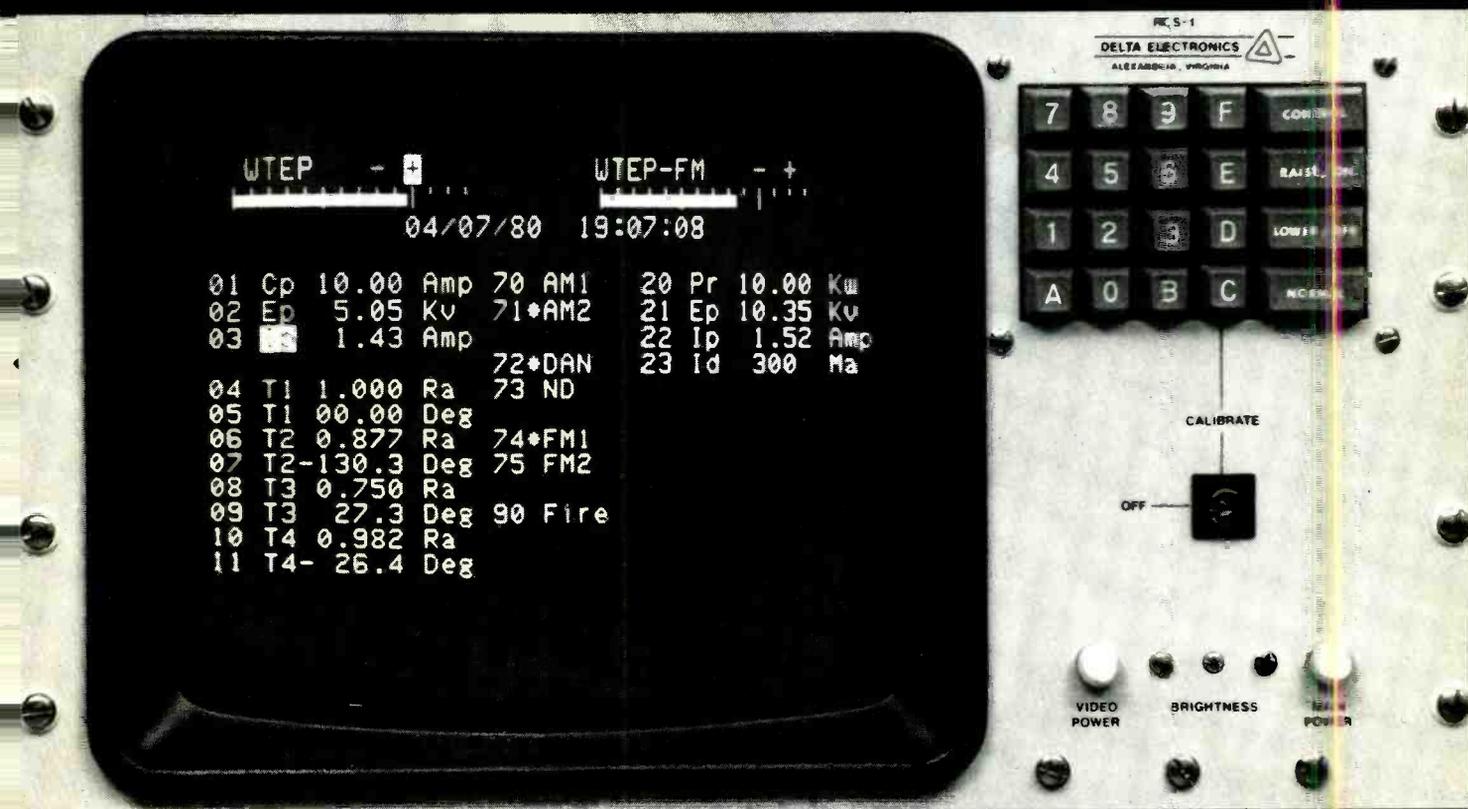

## THE DELTA RCS-1 REMOTE CONTROL SYSTEM

*A simple, yet sophisticated approach to AM, FM and TV Remote Control*

### SIMPLE.

- All parameters are displayed for the operator.
- Hands-off operation until an actual control function is required.
  - Automatic logging option ends the nightmare of forgotten or incorrect log entries.

### SOPHISTICATED.

- Features not found on other remote control systems:
- Modulation bargraph with peak flashers.
  - Direct antenna monitor interface.
  - Telephone coupler with speech synthesizer providing telephone interrogation.

The RCS-1 is designed to grow with your plant. Additional control, input, and alarm boards can be added to the systems, thereby meeting any new station requirements. In addition, the RCS-1 contains the fundamental building blocks for ATS, permitting conversion to a combination Remote Control/ATS System at a later date.

Write or call for a descriptive data sheet and pricing.

**DELTA ELECTRONICS**


5730 General Washington Drive, Alexandria, VA 22312 703-354-3350 TWX 710-832-0273

Circle 167 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)



# KFI KNOWS EXACTLY WHAT THEY WANT IN A 50 KW TRANSMITTER. SO DOES CONTINENTAL ELECTRONICS!

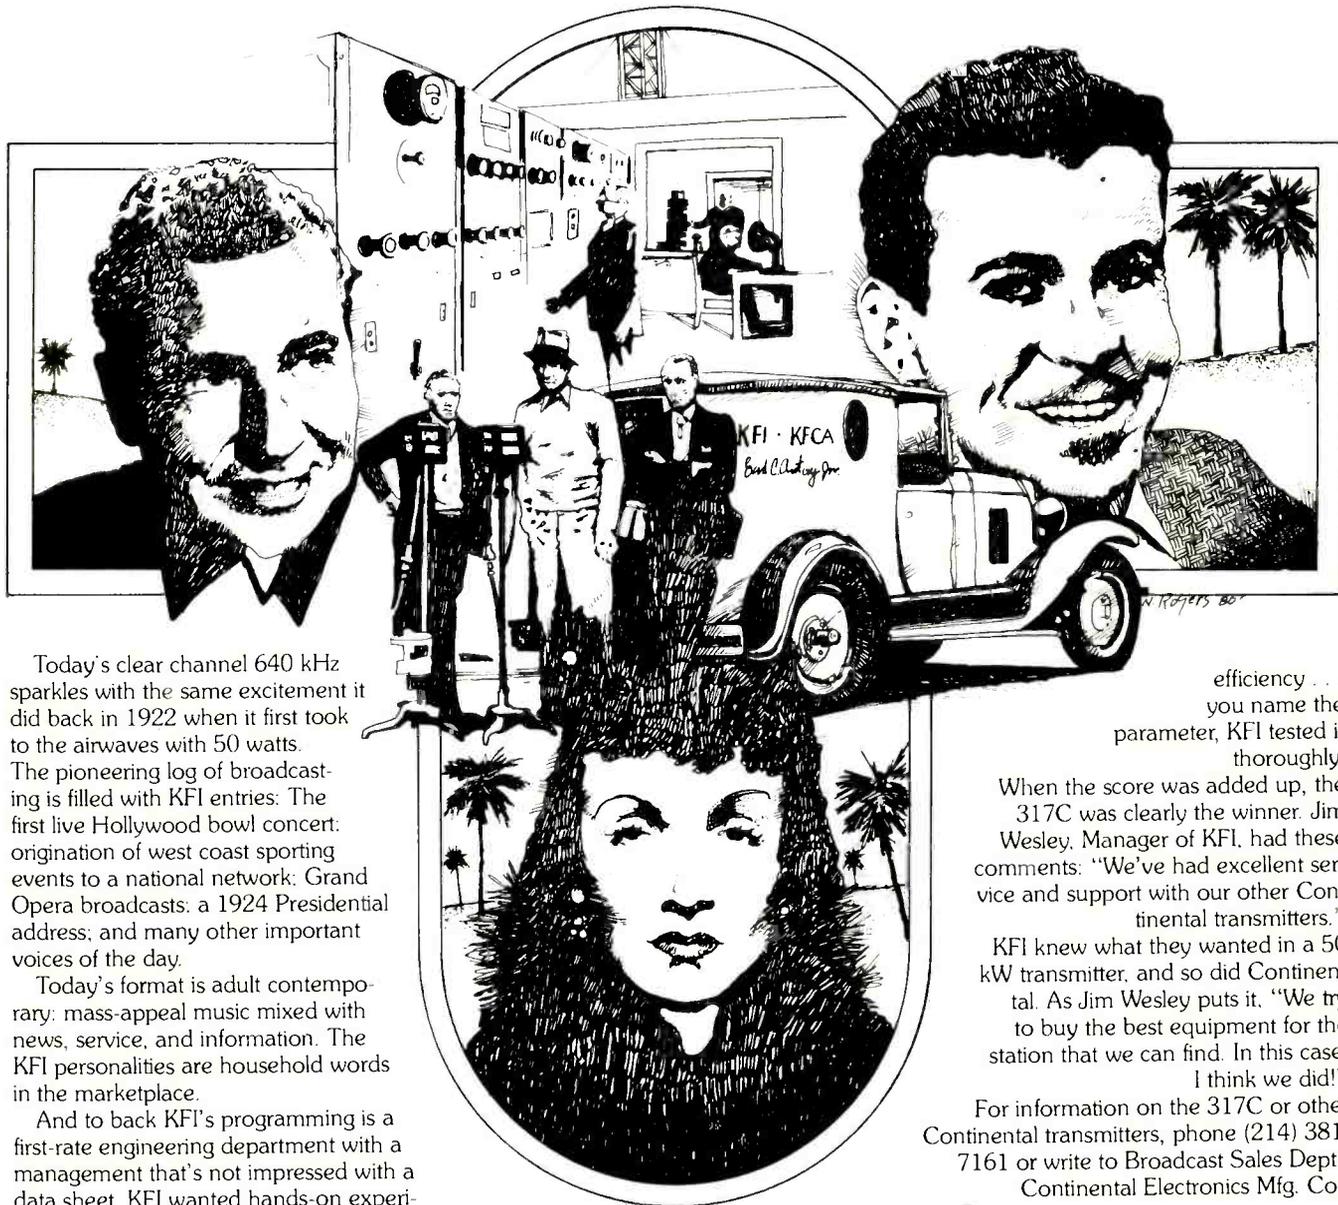

Today's clear channel 640 kHz sparkles with the same excitement it did back in 1922 when it first took to the airwaves with 50 watts. The pioneering log of broadcasting is filled with KFI entries: The first live Hollywood bowl concert; origination of west coast sporting events to a national network; Grand Opera broadcasts; a 1924 Presidential address; and many other important voices of the day.

Today's format is adult contemporary: mass-appeal music mixed with news, service, and information. The KFI personalities are household words in the marketplace.

And to back KFI's programming is a first-rate engineering department with a management that's not impressed with a data sheet. KFI wanted hands-on experience, so they approached the Continental 317C transmitter and its competition with extensive test requirements.

Example: the 317C was adjusted for 52 kW output and full modulation with a 4 kHz square wave. One hour and forty-five minutes later the transmitter was still operating without any significant changes. Distortion, shift, intermodulation,


efficiency . . .  
you name the  
parameter, KFI tested it  
thoroughly.

When the score was added up, the 317C was clearly the winner. Jim Wesley, Manager of KFI, had these comments: "We've had excellent service and support with our other Continental transmitters."

KFI knew what they wanted in a 50 kW transmitter, and so did Continental. As Jim Wesley puts it, "We try to buy the best equipment for the station that we can find. In this case, I think we did!"

For information on the 317C or other Continental transmitters, phone (214) 381-7161 or write to Broadcast Sales Dept.; Continental Electronics Mfg. Co.,

Box  
270879,  
Dallas, Texas  
75227.

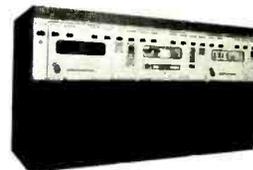

## Continental Electronics



Circle 168 on Reader Service Card


[www.americanradiohistory.com](http://www.americanradiohistory.com)



# SOFBELT™

## The "New Design" Powerbelt. New Materials! New Electronics! New Comfort!

Latest Addition To The Cine 60 Powerbelt Line.

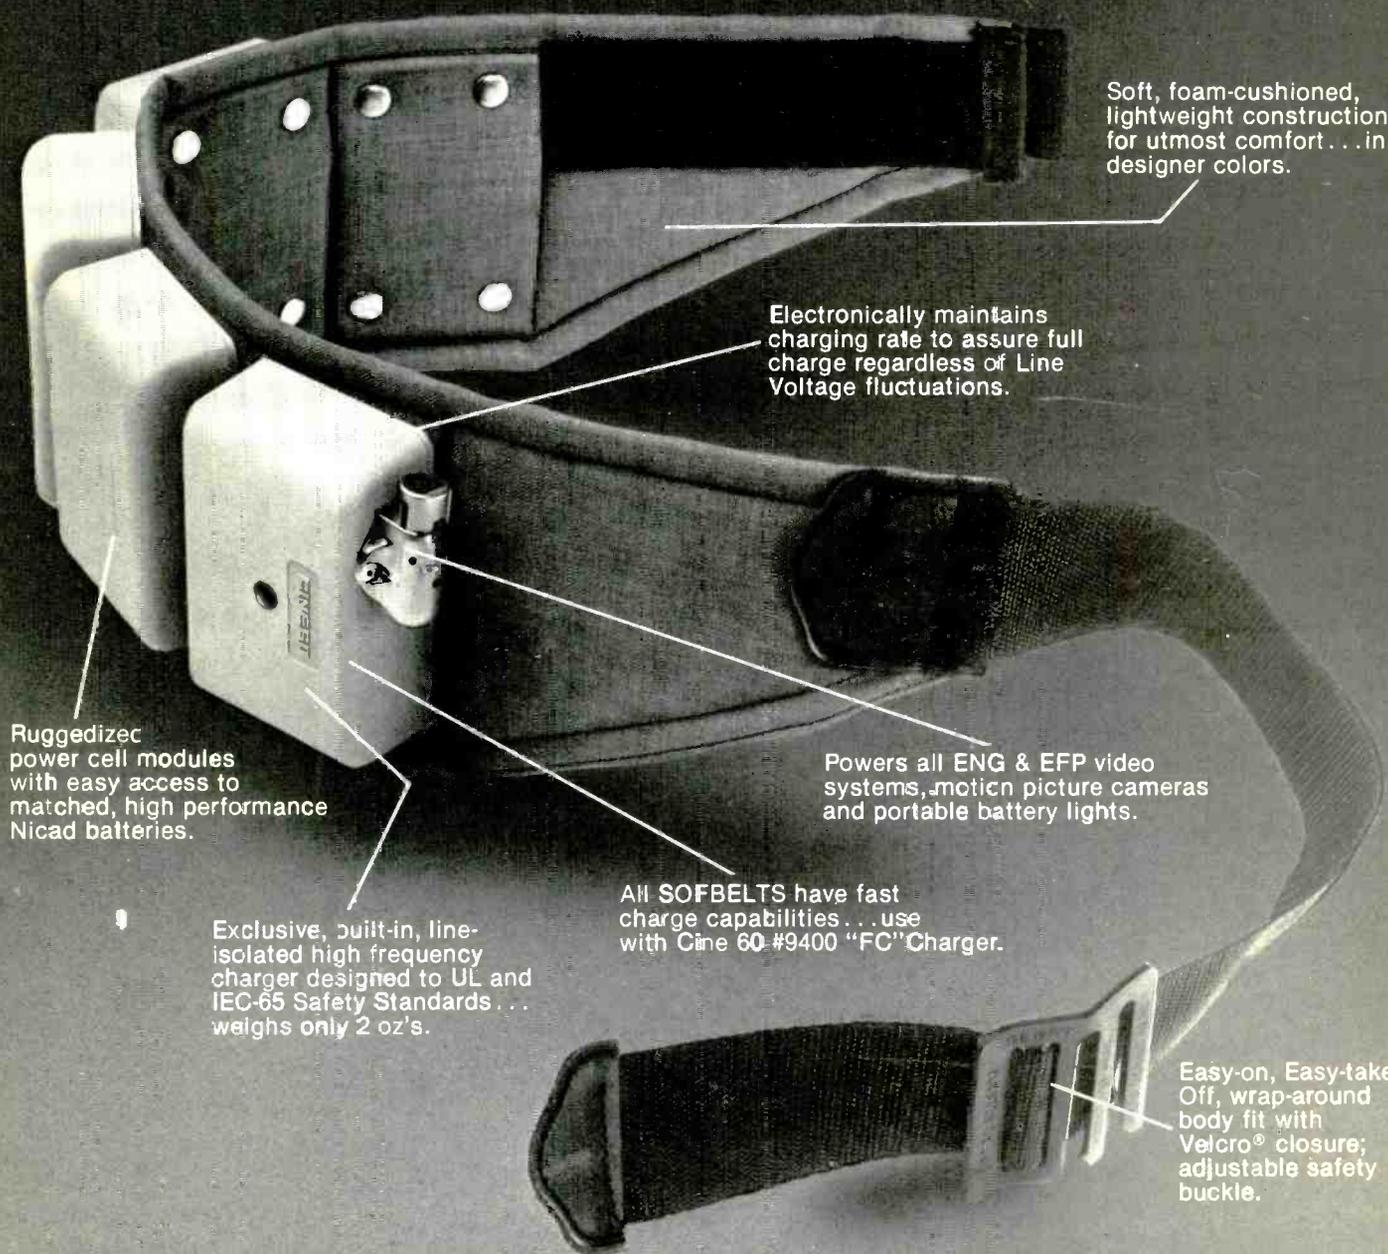

Soft, foam-cushioned, lightweight construction for utmost comfort... in designer colors.

Electronically maintains charging rate to assure full charge regardless of Line Voltage fluctuations.

Ruggedizec power cell modules with easy access to matched, high performance Nicad batteries.

Powers all ENG & EFP video systems, motion picture cameras and portable battery lights.

Exclusive, built-in, line-isolated high frequency charger designed to UL and IEC-65 Safety Standards... weighs only 2 oz's.

All SOFBELTS have fast charge capabilities... use with Cine 60 #9400 "FC" Charger.

Easy-on, Easy-take Off, wrap-around body fit with Velcro® closure; adjustable safety buckle.

Cine 60 manufactures the industry's most comprehensive line of Powerbelts, Powerpaks, On-Board Camera Batteries, In-Board VTR Batteries, Chargers, Battery Lights, Cables and Accessories for Video and Motion Picture use. See your local authorized Cine 60 dealer. And, make it a point to ask for our wide-ranging Battery Selection Guide.

There's Always Something New From Cine 60.



# CINE 60

630 Ninth Ave.  
New York, N.Y. 10036  
(212) 506-8782

6430 Sunset Blvd.  
Hollywood, CA 90028  
(213) 481-3048

The Original

TW: 710-581; TELEX: 645 647.

Circle 170 on Reader Service Card

## Great Ideas

the relay, lighting a console-mounted 75 W incandescent lamp. When the modulation returns, the reverse happens: the 2N2222, once the 339 "snaps" high, pulls the reset line low, cancelling any counting sequence.

It would be possible to put a latch in the circuit to hold the lamp on, if desired. The 200  $\mu$ F cap on the non-inverting input of the comparator is to slow down the response so that the monitor doesn't try to follow the audio waveform fluctuations, but rather keeps an average level. The 28 V lamp is really just a frill—I use it to set the threshold and first timer time. I used a 28 V lamp so it wouldn't glow brightly.

## VOTE FOR BEST IDEAS Ballot On Reader Service Card

### 5. Simple Conduit Box Locator

Robert A. Senne, Technical Maintenance Engineer  
WOJO-FM, Evanston, Ill.

**Problem:** To locate electrical conduit and boxes inside walls or other concealed areas.

**Solution:** Using a hand-held bulk tape eraser, move the energized eraser along the wall, noting any tendency of the eraser to vibrate at the power line frequency. This vibration will occur whenever the field of the eraser encounters a metallic object such as a pipe, conduit, junction box, or anything else that will provide a better path for the field than the surrounding material. After the conduit is located and its path determined, move the eraser along the conduit path until the vibration peaks. This will indicate a box.


I have successfully used this method to locate a junction box in a wall behind a large, permanently installed record cabinet. I was able to cut through the rear of the cabinet at the exact location of the box. I have also used a bulk eraser as a stud finder by detecting the nails in the same manner.

### 6. Newsroom Timer For Cart Machines

Edward B. Schwartz, Engineer  
KRLD-AM, Dallas, Texas

**Problem:** Being a large all-news operation, we needed timers for our many tape edit stations. This timer is basically used to time carts containing actualities and voicers.

**Solution:** The entire circuit is based around the Intersil 7215. This chip contains all of the timing, display multiplexer, and driver circuitry. While the chip can be operated in many modes, we set it up for a simple START-STOP-RESET operation. The chip, along with the 3.2768 MHz crystal, was available as an evaluation kit from our parts distributor.

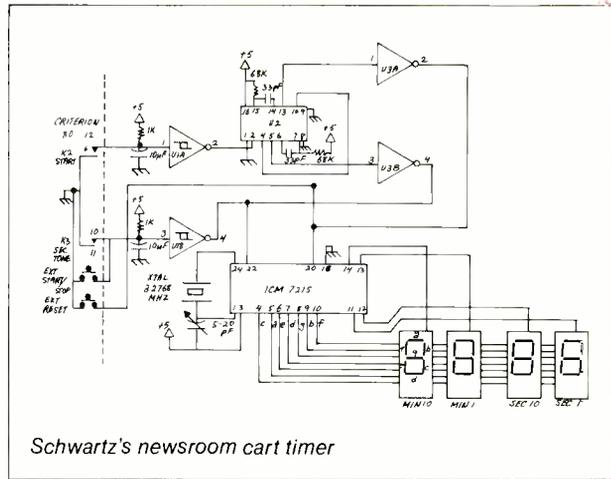

Schwartz's newsroom cart timer

To interface the timer to our Criterion cart machines pin 7 of J3 was tied to ground while pin 6 was connected to the input of a Schmitt-trigger U1A. Relay K2 energizes momentarily when the machine starts. The 1K resistor, 10  $\mu$ F capacitor and the Schmitt-trigger condition the line to avoid contact bounce problems. The output of the Schmitt-trigger is connected to a dual one-shot U2.

The one-shot first resets the timer and then starts it counting. A time delay is necessary between operation of the RESET and START functions due to chip design. This delay is accomplished by connecting the Q output of the first one-shot to the B input of the second. The second one-shot will not fire until the first has returned to the normal state with Q going to a logic high state. The Q output of the first one-shot is inverted by U3A and

## THE CASE FOR SURVIVAL.

Here's a custom case specifically engineered to protect your valuable equipment.

EXCALIBUR cases are

- Rugged—the case that can take it.
- Dependable—the case you can always count on.
- Strong—the case for the long haul.

Choose from the finest materials and hardware available. Built to your specs, or you may consult with our designers regarding your particular needs.

Write or call today for your EXCALIBUR Survival Kit.




# EXCALIBUR INDUSTRIES

12251 Foothill Blvd., Lake View Terrace, CA 91342 · (213) 899-2547

TWX 910-494-1233

Circle 171 on Reader Service Card

The measure of success.

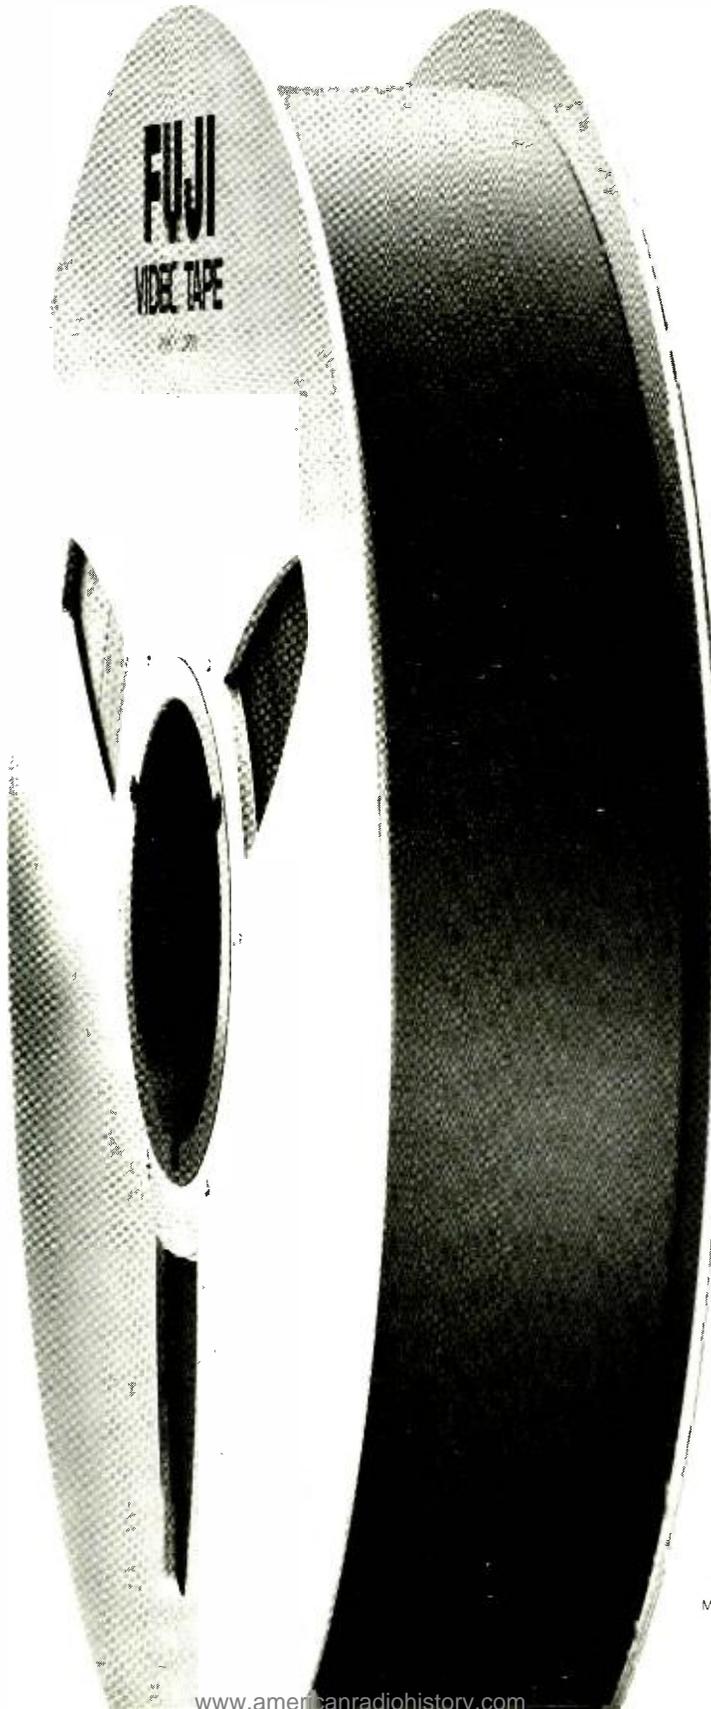

In 2," 1" and ¾"  
½" Beta and VHS Video  
*and* Head Cleaning  
Cassettes.



**FUJI**

© 1980 Fuji Photo Film U.S.A., Inc.  
Magnetic Tape Division 350 Fifth Avenue, NY, NY 10118

Circle 173 on Reader Service Card



## Great Ideas

connected to the reset input of the timer chip. The Q output of the second section is also inverted (by U3B) and connected to the START/STOP input.

At our station we use secondary tones at the end of actualities to turn off audio modules on our Cetec board. By utilizing a set of contacts of K3 (also available through J3 pins 10 and 11) and conditioning as before, the display can be frozen at the end of the recorded material on the cart. I also provided two external buttons for manual reset and START/STOP of the timer. The entire unit was built on a four-inch by four-inch PC board which is mounted inside the edit station. With very simple modification this timer can work with any cart machine.

### 7. Remote Automation Monitor

Mark A. Schnell, Technician  
WONO-FM, Syracuse, N.Y.


**Problem:** To provide a remote visual and audio status indicator of an FM automation system at the sister AM station control point.

**Solution:** This circuit is merely an extension of visual and audio indicators found at the automation location. The automation system in use is a Schaffer 900 series. First, this circuit was designed to be mounted on the rear of a standard 19-inch rack filler panel.

In dealing with the remote audio indicator, all that was

necessary was to tap into the external air-monitor system at the automation control point. This audio, rated at 8 ohms, is then fed into a 5 W speaker, preceded by a rotary volume control and a DPDT switch.

Two visual indicators are employed, a green one to indicate "on-air" status and a red one to indicate "off-air." These lights are controlled by a 24 V relay at the automation's external air circuit. When "on-air," 24 V is fed to the green indicator. If the system goes "off-air," this same relay trips the red indicator. Since this panel could be mounted in the AM's equipment rack or even at the audio board, it provides a two-fold check of the automation's on-air status at the flick of a switch or a glance across the room at the equipment rack.

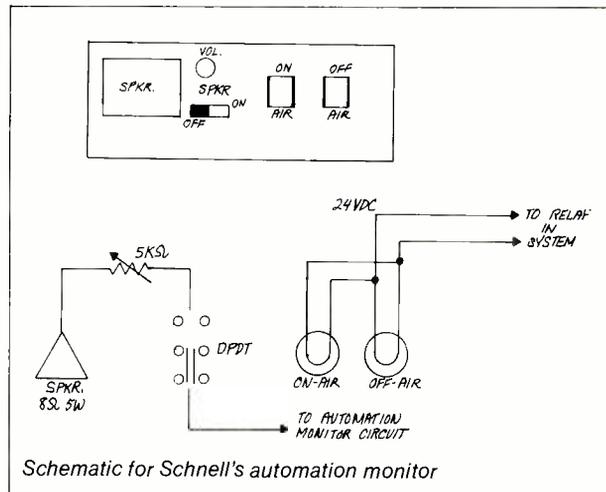

## Rules for BM/E's 1981 Great Idea Contest

Mail to:  
Editors, BM/E  
295 Madison Avenue  
New York, New York 10017

1981  
Entry Form

Name \_\_\_\_\_ Title \_\_\_\_\_  
Station Call Letters \_\_\_\_\_ City \_\_\_\_\_  
State \_\_\_\_\_ Zip \_\_\_\_\_  
Telephone No. \_\_\_\_\_  
Licensee \_\_\_\_\_

Class of Station at which idea is used (check one)  
TV \_\_\_\_\_ FM \_\_\_\_\_ AM \_\_\_\_\_  
Category: Audio \_\_\_\_\_ RF \_\_\_\_\_ Video \_\_\_\_\_ Control \_\_\_\_\_

Objective or Problem: (In few words; use separate sheet for details)

Solution: (Use separate sheet—500 words max)

I assert that, to the best of my knowledge, the idea submitted is original with this station; and I hereby give BM/E permission to publish the material.

Signed \_\_\_\_\_ Date \_\_\_\_\_

**1. Eligibility:** All station personnel are eligible. Consultants to the industry may enter if the entry indicates the specific station or stations using the idea or concept. Manufacturers of equipment or their representatives are not eligible.

**2. How to Enter:** Use the Official Entry Form on this page or simply send BM/E a description of your work. State the objective or problem and your solution. Include diagrams, drawings, or glossy photos, as appropriate. Artwork must be legible but need not be directly reproducible and not exceeding three in number. Camera reproducible material is preferred. Length can vary, but should not exceed 500 words. BM/E reserves the right to edit material. Entry should include: Name, title, station affiliation, and the class of station—TV, FM, AM. Indicate if idea is completely original with you.


**3. Material Accepted for Publication:** BM/E editors will make all decisions regarding acceptability for publication. If duplicative or similar ideas are received, BM/E editors will judge which entry or entries to accept. A \$10 honorarium will be paid for each item published.

**4. Voting:** Every reader of BM/E is entitled to rank the ideas published. This can be done on the Reader Service Card in the magazine or by letters or cards sent to the BM/E office. To vote, readers should select the three ideas they like best and rank them 1, 2, or 3.

**5. Winners:** Top rated entries in the year-long tally will become winners in each of the three major categories (AM, FM, TV). Final winners will be picked in February, 1982, and announced in the March, 1982, issue of BM/E.

**6. Prizes and Awards:** Three top prizes will be awarded; a programmable electronic calculator will be awarded for the highest rated entry in the respective categories of AM, FM, and TV. Ten engineering slide rule calculators will be awarded as secondary prizes for the highest rated entries in the following additional categories (top three winners are not eligible for these prizes): audio (three prizes, one each in the AM, FM and TV categories); RF (three prizes, one each in the categories of AM, FM, TV); Control (three prizes, one each in the AM, FM and TV categories); Video (one prize in TV).


SC39 meets all the demands of professional cartridge users.

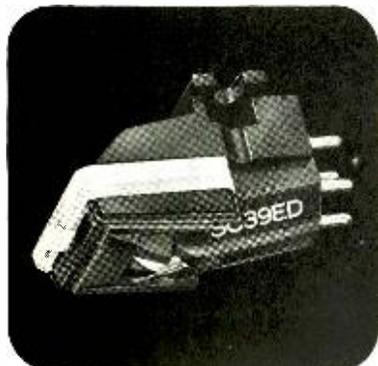


The SC39 offers the professional undistorted playback, even on the toughest-to-track, "hottest" recordings—plus the kind of durability necessary to stand up to the job: even to slip-cuing, backcuing, and occasional stylus abuse.

What's more, the SC39 offers three unique features:

**SIDE-GUARD Stylus Deflector:** Protects against side-thrusts by withdrawing stylus tip and shank safely into cartridge body



SIDE-GUARD Stylus Deflector



FLIP-DOWN Stylus Guard

**FLIP-DOWN Locking Stylus Guard:** Offers stylus tip positive protection when not in use. Snaps out of way with a flip of the thumb, positioning a high-visible cuing aid.

**MASAR™ stylus tip:** Minimizes noise buildup and cue-burn on lacquer masters, as well as on often-played recordings, or 45 rpm's pressed on substandard vinyl.

Write for free brochure AL620



Shure Brothers Inc.  
222 Hartrey Ave. Evanston, IL 60204  
In Canada: A. C. Simmonds & Sons Limited  
Manufacturers of high fidelity components  
microphones, sound systems and  
related circuitry


Circle 172 on Reader Service Card

# BROADCAST EQUIPMENT

This month's selection of new broadcast equipment focuses primarily on products introduced at October's SMPTE Exhibition. Leading off our survey this month, however, is Tektronix's new high quality monitor, seen here for the first time.

## Color Picture Monitor 250

The 690 SR is a quality high-resolution 19-inch color picture monitor designed for camera control, studio control, production, and post-production applications. Designed to be, in the manufacturer's words, "the reference standard picture monitor," it features a high resolution shadow mask picture tube, stabilized color balance, stabilized picture, accurate color decoding, and excellent color convergence. Efficient power supplies, modular con-

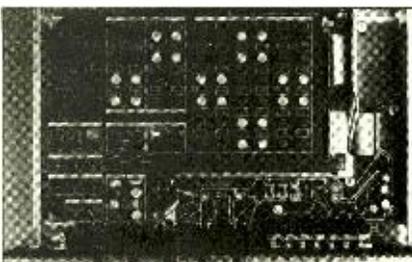

struction, easy alignment, and ruggedness give the unit high dependability. In addition, it features plug-in decoders and adaptability to future standards. A plug-in interface module takes care of all signal processing and decoding needs; new modules will become available as needed to keep up with technological advances, according to the manufacturer. The true high resolution shadow mask tube has 0.31 mm dot

triad spacing with no moire problems; precise convergence allows for critical examination of the picture (0.5 mm). A convenient pull-out control drawer houses 52 hand-adjustable convergence controls, backed up by a full-color convergence control matrix panel. A lower-priced version with a medium-performance picture tube will also be available. \$8000 to \$9500 (anticipated price range as of April, 1981). TEKTRONIX.

## Subtitling Option 251

The new subtitling option for the Compositor I graphics system with 64K computer can be programmed for automatic insertion of up to 2000 subtitles per disc cartridge into time-coded NTSC or PAL videotapes. Consisting of a software program and an FR-10 subtitling time code reader, it becomes ready to use with the addition of record and playback VTRs. The replaceable disc cartridges, standard on the Compositor, allow unlimited subtitle storage with random access editing capability. In and out points are entered by the system's standard keyboard, and the option allows full access to all fonts, character edging, and colors. Compositor systems equipped with the 32K computer may be field retrofitted to accept the new computer and option. FERNSEH INC.

## Time Code Reader 252

The Avitel TRE 2030 reads SMPTE/EBU time code at speeds from 1/25 to 80 times play speed. Front-panel LEDs

**When accuracy Counts...Count on Belar for AM/FM/TV MONITORS**

**BELAR**  
AM MODULATION MONITOR

**BELAR CALL ARNO MEYER (215) 687-5550**  
**ELECTRONICS LABORATORY, INC.**  
LANCASTER AVENUE AT DORSET, DEVON, PA 19333 • BOX 826 • (215) 687-5550

Circle 175 on Reader Service Card

monitor incoming time code, warning of level, jitter, frequency, and edge faults. The unit provides a jitter-free reclocked output for dubbing at play speed. Its built-in character generator allows decoded time or user bit information to be inserted into a television picture in various positions and sizes. The display freezes for identification of event or cue points. Drop-frame indication, remote control of all functions, and parallel BCD output are featured. The unit may be supplied in a free-standing case or rackmount frame, which will house two units. TELEVISION EQUIPMENT ASSOCIATES.

#### Subtitling System

253


The QST subtitling system combines a full-function, high-performance teleproduction studio titler—the Quantafont Q-7A—with an expanded software and time code interface package to provide totally flexible automatic or manual electronic subtitling. The system includes the Q-7A, switch-selectable for complete subtitling program or teleproduction studio titling; dual flexible disc memory storage and playback, providing an unlimited number of automatic or manual three-row subtitles; and the subtitling software program, which interfaces directly with audio or TTL level EBU/SMPTE time codes. Comprehensive off-air edit/control display provides “next,” “current,” and “prior” control rows simultaneously in TIMING and EXECUTE modes. Other features include selectable manual start and stop time control; automatic sequential subtitle indexing; insert, delete and recompose editing; selectable vertical line positioning; colorized characters selectable by row. SYSTEM CONCEPTS.

#### Waveform Monitor

254

The PM 5565 waveform monitor has been designed specifically for studio and mobile broadcast applications. With the companion PM 5567 vector-scope, it forms a complete color setup system for color cameras. Among its features are a probe input at the front that works with standard oscilloscope probes; six calibrated time base positions; an internal graticule for elimination of parallax errors of readings; external sync with composite video signals and sound-in-synce; and very fast retrace. Two equal inputs have full

**For more information  
circle bold face numbers  
on reader service card**

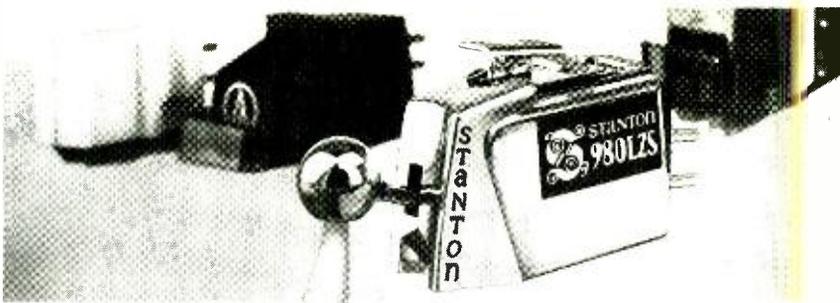

## The moving coil replacement from Stanton Magnetics... the revolutionary 980LZS!

Now, a low impedance pickup that offers all the advantages of a moving magnet cartridge without the disadvantages of a moving coil pickup. It offers a dramatic new crispness in sound, a new crispness resulting from its rise time of less than 10 micro seconds. Low dynamic tip mass (0.2 mg.) with extremely high compliance assures maximum smooth trackability. The 980LZS connects to either a moving coil input or a separate preamp.

For moving coil advocates the 980LZS offers a new standard of consistency heretofore unattainable. For moving magnet audiophiles it provides one more level of sound experience without sacrificing the great reliability and sound characteristics of the best moving magnet assemblies.

For further information write to Stanton Magnetics Inc., Terminal Drive, Plainview, N.Y. 11803




# STANTON

THE CHOICE OF THE PROFESSIONALS™

Circle 176 on Reader Service Card

## MICROPROCESSOR - BASED REMOTE CONTROL SYSTEM

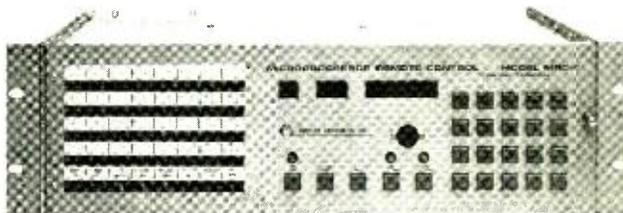

### THE MRC-1

- 64 COMMAND LINES PER SITE CAPABILITY
- 32 STATUS AND TELEMTRY CHANNELS PER SITE CAPABILITY
- NON-VOLATILE MEMORY OPTION
- AUTO LOGGING OPTION
- CRT OPTION

Combining flexibility with straightforward operation, the microprocessor-based MRC-1 offers user-assignable, momentary or latching control and status functions. Telemetry samples are keyboard calibrated for linear, direct power, or indirect power scaling; upper and lower tolerance limits are user-defined. Both telemetry and status indicators include programmable alarm functions. The control terminal constantly scans all remote sites for data, and self-checking of internal calibration and system integrity is continuous.

FOR FURTHER INFORMATION PLEASE CONTACT OUR MARKETING DEPARTMENT



## MOSELEY ASSOCIATES, INC.

A FLOW GENERAL COMPANY  
SANTA BARBARA RESEARCH PARK, 111 CASTILIAN DRIVE • GOLETA, CA 93117  
(805) 968-9621 • CABLE: MOSELEY • TELEX: 658-448

Circle 177 on Reader Service Card

BM/E FEBRUARY, 1981 103

# ONE REASON WE'RE HOT



## SPECIAL EFFECTS

Ultimatte composite imaging  
Video disc animation and motion effects  
Snorkel lens  
Digital Video Effects

Contact Larry Kingen 415/777-5777

Onez Pass Inc.  
The San Francisco Production Center  
900 Third Street, San Francisco, California 94107

Circle 178 on Reader Service Card

# Zeppelin<sup>®</sup> wind screen




Z415 - \$115.00  
Z615 - \$130.00  
AP4-6 - \$70.00  
AR816 - \$75.00

The Zeppelin Wind Screen insures rumble-free sound recording under windy conditions. Your video recorded sound will be virtually studio-clean despite noisy air movement. The Zeppelin's aerodynamic design screens the microphone, filtering the wind, allowing the sound in. Although extremely lightweight, the Zeppelin is nearly indestructible and can be boom mounted or hand held with the Independent Suspension Shock Mount. There are Zeppelins available to house Sennheiser 816 and 416, AKG CK-8 and CK-9 and other similar microphones.

**alan gordon enterprises inc.**  
1430 E. Cahuenga Blvd., Hollywood, CA 90028  
Telephone: (213) 466-3561 • (213) 985-5500  
TWX: 910-321-4326 • Cable: GARDENT

Circle 179 on Reader Service Card

## DON'T BUY ANY BROADCAST CAMERA BEFORE YOU RENT a Toshiba PK-39

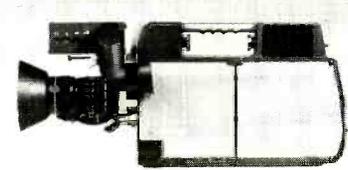

Look at all 3 before you buy any video camera. Compare the Toshiba PK-39 with the Ikegami HL79 or RCA TK76 for picture quality, ease of handling, flexibility — enjoy its unequalled light sensitivity and picture contrast. Rent a PK-39 for your next shooting from Miller — the video specialists. Call or write for moderate day and weekly rates.

**L. MATTHEW MILLER  
Assoc. Ltd.**

Suite 1316, 205 East 42nd Street,  
New York, NY 10017  
Telephone: (212) 687-1168 • (800) 223-0620  
Cable VIDEOUSA Telax 238917

VIDEO EQUIPMENT • RENTALS • SERVICE/  
REPAIRS • VIDEOTAPE • EDITING

Circle 180 on Reader Service Card

## Broadcast Equipment

screen deflection sensitivities of 1 Vand 200 mV, plus a probe input and an internal calibration source. Power requirements are 110/127 V  $\pm$  1 percent or 220/240 V  $\pm$  10 percent, 48 to 65 Hz; consumption is 30 W at 220 V. PHILIPS.

### Video Controller

255

The Intelligent Controller™ combines three basic video control functions in one modular, microprocessor-controlled unit. It may be configured in a variety of ways according to user need—for example, with two SMPTE readers, two SMPTE writers, two keyers (optional with the writer), and two VTR controllers in one compact chassis, or with just one of the basic functions, for later expansion with plug-in modules. The basic functions are: the VTR Controller IC1001, compatible with all removable VTRs, which features standard VTR controls, searches by control track time code, or scene and take, and VTR speed and direction variable by a "stroker™"; the SMPTE Reader IC1100, with high sensitivity specs that allow SMPTE time to be recorded at lower levels, minimizing crosstalk; and the SMPTE Writer IC1010, which multiplexes user bits, allowing up to 30 separate inputs per second to go into user bits. CONTROL VIDEO CORP.

### Three-Channel Sound Mixer

256

For portable video recording applications, the three-channel sound mixer A 97 features two mic inputs (–70 dBm to –40 dBm, preattenuation); one mic or line input; and phantom power of 12 V on each mic input. Other features include a high pass filter (125 Hz) and "presence filter" (3200 Hz), VU meter, LED for peak measurement (+8 dB VU), and 1000 Hz oscillator. Mic level output is –51 dBm; balanced line output is at +4 dBm with output transformer. The unit is battery powered by 10 1.5 V R6-AA cells. It weighs less than three pounds without batteries and measures 10.8 by 3.2 by 2.4 inches. Noise is rated at –125 dBm. L.T.M. CORP. OF AMERICA.

### One-Inch VTR System

257

The TR-800 system is built around the maker's TR-800 one-inch VTR, supported by several sophisticated equipment options: the TBC-210P/S digital time base corrector; the SSE preview-

able/multi-cue editor; time code modules; the AE-800 time code editing system; the MRVC variable motion remote controller; and multiple remote control capabilities. Full record, playback, simulplay, and monitoring capabilities are among the TR-800's many standard features. The system is compact to fit in a wide variety of spaces. Featured advantages include: precision tape handling, with two-hour reel capacity, simple tape loading, and servo motors that eliminate tape stress while insuring high acceleration and winding speeds; and microprocessor control with the built-in Supertrack system, multi-rate video operation, and a fingertip control panel. The built-in editor is standard, with the Super Search Editor (SSE) optional. RCA.

#### Intercom System

258

The System II distributed amplifier intercom system is designed for superior intelligibility in high-noise environments. Operating range and capacity have been increased over previous models through high-impedance bridging circuitry. Up to 100 remote stations can be accommodated. Circuit breakers and LED short indicators have replaced fuses and are on the front panel. A proprietary contoured frequency response delivers maximum intelligibility under a wide variety of conditions. Any or all channels may be monitored separately or simultaneously without being tied together; visual signalling is standard. Provision is made for an auxiliary program input to be mixed into the intercom system, and an adjustable side tone enables the user to vary the amount of his or her own voice in the headset, also preventing feedback when the headset is removed. Nominal power is 28 V dc, but the system will operate over a full range of 32 V down to 9 V. CLEAR-COM.

#### Camera Testing Stand

259

This remote controlled TV color camera testing stand is designed to provide alignment and adjustment of television cameras for registration, resolution, gray scale, and color. Luminance and color temperature are held constant and brightness is evenly distributed; luminance and color temperature at the screen are optionally adjustable. The remote control unit provides ON/OFF and pattern changer control from the studio control room. Five different test patterns are available. The complete system includes 50 feet of input cable with connectors, 50 feet of remote cable with connectors, remote control box, and lamp. About \$7000. KLIEGL BROTHERS.

## Change Sound to Silence with a **TABERASER**



This rugged, heavy duty bulk tape eraser wipes sound from all magnetic tapes, cartridges, cassettes and magnetic film stock; handling up to 2".

It erases with minimum residual noise because the field automatically diminishes at the end of each 30-second cycle. A thermal control and blower keeps the unit below 71° C.

Available for 60Hz or 50Hz operation.

For the distributor in your area—Call or write:

**TABER** Manufacturing & Engineering Company  
2081 Edison Ave. • San Leandro, Ca. 94577 • (415) 635-3831

Circle 181 on Reader Service Card

# PERFECT TIMING

## ES 206 VIDEO TIME AND DATE GENERATOR



**ADD TIME AND DATE INFORMATION TO YOUR VIDEO! DISPLAY IT ANYWHERE ON THE SCREEN.**

Time is displayed in 24 hour format, Hours - Minutes - Seconds. Date is displayed in six digits: Month - Day - Year. An internal switch permits stacking the date information above the time, or displaying all data on a single line.

YOU CAN BUY AN ES 206 FOR

**\$550**



142 SIERRA ST., EL SEGUNDO, CALIFORNIA 90245 • (213) 322-2136

Circle 182 on Reader Service Card

BM/E FEBRUARY, 1981 105

## Advertisers Index

ADM Technology, Inc.	C2.9
American Data Corp.	24
Ampex AVSD	14-15
Ampex MTD	38
Belar Electronics Lab. Inc.	102
Bell Helicopter Textron	C3
Beyer Dynamics	73
Broadcast Video Systems	106
Capitol Magnetic Products	82
Central Dynamics Ltd.	37
Centro Corp.	37
Chronotrol/Lindburg Enterprises	86
Cine 60 Inc.	98
Cinema Products Corp.	78
CMX/Orox	3
Comrex	17
Continental Electronics Mfg. Co.	96
Datatron. Inc.	92
dbx, Inc.	42

Delta Electronics, Inc.	95
Dynair Electronics	75
Electro-Voice	20
ESE	105
Excalibur Industries	99
Fernseh Inc.	68-69
Fidelipac	72
Fuji Photo Film U.S.A. Inc.	100
General Electric Co. Video Display Equipment	88
Alan Gordon Enterprises Inc.	104
Grass Valley Group, Inc.	7,80
Hallikainen & Friends	106
Harris Corp.	34
Hitachi Denshi American Ltd.	4-5
Hughes Electronic Devices Corp./Hedco	94
Hughes Helicopters	77
Ikegami Electronics USA Inc.	29
Industrial Sciences Inc.	84
Inovonics Inc.	74
Instant Replay	94
International Tapetronics Corp.	27
U.S. JVC Corp.	53

Knox Video Systems	28
Lenco Inc.	11
LPB Inc.	62
3M/Magnetic Tape Div.	58-59
3M/Mincom-Video Products	70
Maxell Corp.	45
MCI/Quantel (Micro Consultants Inc.)	46
McMartin Industries Inc.	48
Merlin Engineering	26
L. Matthew Miller	104
Microtime Inc.	83
Moseley Assoc. Inc.	103
NEC America, Inc.	81
Rupert Neve Inc.	13
One Pass, Inc.	104
Orban Associates Inc.	63
Otari Corp.	16
Pacific Recorders & Engineering Corp.	64
Panasonic Matsushita	22-23
Philadelphia Resins Corp.	85
Philips Broadcast Equipment Corp.	32
Polyline	73
Potomac Instruments	21

QSI Systems Inc.	50
RCA Broadcast Systems	55
Rockwell International	56
Ruslang Corp.	89
Sennheiser Electronic Corp.	80
Sescom	86
Shintron	10,12
Shure Bros. Inc.	102
Sintron Corp.	76
Sony Corp. of America	30-31
Stanton Magnetics Inc.	103
Studer Revox America Inc.	90
System Concepts	93
Taber Mfg. & Eng. Co.	105
Thomson—CSF	40
Thomson—CSF DRT	60
Ultra Audio Products	106
UMC Electronics Co.	18
United Media	19
Utah Scientific Inc.	87
Vamp	93
Varian, Eimac Div.	65
Video Aids Corp. of Colorado	97
Ward-Beck Systems Ltd.	C4

## It's a Real Operator!

The PCC series computer transmitter control and logging system can handle your operation the way *you* tell it to. A real operator, but with you in control.



### Hallikainen & Friends

101 Suburban Road, San Luis Obispo, CA 93401  
(805) 541-0200

Circle 185 on Reader Service Card

# DATAQUE



## Teatronics REMEMBERS

6400 TV STAGE LIGHTING CUES

200 cues for each of 32 channels (expandable to 64)  
• Usable with virtually any brand of dimmer • Stores fades up to 98 sec. duration • Easy to program • Large digital readouts • Fade from any cue to any cue • CRT & cassette peripherals available • Copy any cue's setting into any other cue • Ideal complement to Teatronics dimmers • Manually alterable dipless crossfades •



DEALER INQUIRIES INVITED • EXCLUSIVE DISTRIBUTOR TO THE VIDEO WORLD

## telaudio centre

P.O. BOX 921 • BEVERLY HILLS  
CA 90213 • 213 / 276-2726

Circle 183 on Reader Service Card



## VIDEO & PULSE DELAY LINES

- PC MOUNT
- BOXED
- RACK MOUNT DELAY CARDS

- TOP QUALITY
- LARGEST STOCK
- BEST DELIVERY
- LOWEST PRICE

CONTACT THE DELAY LINE COMPANY

# broadcast video systems ltd.

1050 McNicoll Ave.  
Toronto, Ont, M1W 2L8  
(416) 497-1020

1438 N. Gower  
Hollywood CA. 90028  
(213) 460-2949

Circle 184 on Reader Service Card

## SALES OFFICES

# BM/E

Broadcast Management/Engineering

295 Madison Ave.  
New York, New York 10017  
Telex: 64-4001

### Eastern & Midwestern States

295 Madison Avenue  
New York, New York 10017  
212-685-5320  
James C. Maywalt  
Denis J. O'Malley

### Western States

353 Sacramento Street  
Suite 600  
San Francisco, CA 94111  
415-421-7330  
William J. Healey  
Rodger Wadley  
3420 Ocean Park Blvd., Suite 3020  
Santa Monica, CA 90405  
213-450-7181  
Bob Hubbard

### United Kingdom/Europe

Chilberton House  
Doods Road  
Reigate, Surrey, England  
Telephone: Reigate 43521  
Robert N. Burn  
Bronwyn Holmes  
Derek Hopkins

### Japan/Far East

Eiraku Building  
1-13-9, Ginza  
Chuo-Ku, Tokyo 104 Japan  
03 (562) 4781  
S. Yasui  
K. Yamamoto



Bell helicopter **TEXTRON**  
Division of Textron

**A Bell  
JetRanger III  
puts you  
on top  
of the  
competition,  
giving you  
an edge in  
audience  
share.**

Get a big story on the early news instead of the late night edition and you have a tremendous competitive advantage. If the viewer watches the early telecast, you stand a good chance to hold him all evening. And that means rating points!

The best way to beat the competition is with a Bell JetRanger III. It gets you into otherwise inaccessible areas. It lets you transmit live up to 120 miles away, or tape and transmit enroute. The story can be on the air before you land.

Bell's JetRanger III is a superior ENG platform, offering low noise and vibration, so you get sharper pictures and cleaner audio. The large cabin allows shooting from either side through large sliding windows. And there's no need to clutter the space, because there's plenty of storage room in the baggage compartment, as well as in other accessible storage areas.

Bell's JetRanger III. Backed by the world's most extensive parts and service system.

**Would you like to see what one can do for you?**

For more information on Bell helicopters designed for the communications industry, contact Bell Helicopter Textron, Department 698, Box 482, Fort Worth, Texas 76101, or call 817/280-2117.

Circle 186 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# The Evolution of the Ultimate Standard.

Chosen by major television stations and production centers for its extensive range of standard features, the M2484B Broadcast/Multitrack Console combines total engineering integrity with legendary Ward-Beck performance.

Carefully blending the characteristics necessary for television production with those inherent in 16 track recording, the M2484B has evolved into the ultimate standard console for broadcast production.



First by Design.

Ward-Beck Systems Ltd.,  
841 Progress Avenue, Scarborough, Ontario,  
Canada M1H 2X4. Tel:(416)438-6550.

Ward-Beck Systems Inc., 6900 East Camelback Road, Suite 1010, Scottsdale, Arizona 85251.