

REAL

# Receiving Tube Manual

Picture Tubes  
and Industrial  
Receiving  
Tubes



RC-29

**\$2.50** Optional  
Price



RCA

# Receiving Tube Manual

Picture Tubes  
and Industrial  
Receiving  
Tubes

This manual, like its preceding editions, has been prepared to assist those who work or experiment with home-entertainment or industrial receiving types of electron tubes and circuits. It will be found valuable by engineers, service technicians, educators, experimenters, electricians, radio amateurs, hobbyists, students, and others technically interested in electron tubes.

Easy-to-read text chapters explain the basic principles of operation, significant electrical characteristics, circuit applications, and testing of various types of electron tubes. Detailed ratings and characteristics data are given on all current RCA home-entertainment and industrial types of electron tubes. For more convenient referencing of the latest types, the **Technical Data for Receiving Tubes—Entertainment and Industrial Types** section has been restricted to coverage of active RCA tubes; basic data for replacement and discontinued tubes are given in the **Characteristics Chart for Entertainment and Industrial Receiving Tubes**. This manual also features an extensive **Applications Guide for RCA Receiving Tubes**, a section for **Terminal Diagrams for Receiving Tubes**, a **Relacement Guide—Entertainment Receiving Types**, a **Re-placement Guide—Industrial Receiving Types**, and a **Pictue Tube Characteristics Chart**. A **Circuits** section illustrates the use of RCA tubes in practical circuit applications.

RCA | Electronic Components | Harrison, N. J. 07029

1973 RCA Corporation

# Contents

|  | PAGE       |
|--|------------|
| <b>ELECTRONS, ELECTRODES, AND ELECTRON TUBES . . . . .</b>   | <b>3</b>   |
| <b>ELECTRON TUBE CHARACTERISTICS . . . . .</b>   | <b>13</b>  |
| <b>ELECTRON TUBE APPLICATIONS . . . . .</b>  | <b>15</b>  |
| <b>ELECTRON TUBE INSTALLATION . . . . .</b>  | <b>81</b>  |
| <b>SAFETY PRECAUTIONS—RECEIVING TUBES,<br/>    PICTURE TUBES . . . . .</b>   | <b>93</b>  |
| <b>INTERPRETATION OF TUBE DATA . . . . .</b>   | <b>95</b>  |
| <b>ELECTRON TUBE TESTING . . . . .</b>   | <b>100</b> |
| <b>APPLICATION GUIDE FOR RECEIVING TUBES . . . . .</b>   | <b>104</b> |
| <b>TECHNICAL DATA FOR RECEIVING TUBES—<br/>    ENTERTAINMENT AND INDUSTRIAL TYPES . . . . .</b>                                  | <b>111</b> |
| <b>STRUCTURE OF A MINIATURE TUBE . . . . .</b>   | <b>521</b> |
| <b>CHARACTERISTICS CHART FOR ENTERTAINMENT AND<br/>    INDUSTRIAL RECEIVING TUBES . . . . .</b><br>(includes discontinued types) | <b>522</b> |
| <b>TERMINAL DIAGRAMS FOR RECEIVING TUBES . . . . .</b>   | <b>594</b> |
| <b>OUTLINES . . . . .</b>  | <b>632</b> |
| <b>RESISTANCE-COUPLED AMPLIFIERS . . . . .</b>   | <b>639</b> |
| <b>REPLACEMENT GUIDE—<br/>    ENTERTAINMENT RECEIVING TYPES . . . . .</b>  | <b>648</b> |
| <b>REPLACEMENT GUIDE—<br/>    INDUSTRIAL RECEIVING TYPES . . . . .</b>   | <b>654</b> |
| <b>PICTURE TUBE CHARACTERISTICS CHART . . . . .</b>  | <b>662</b> |
| <b>TERMINAL DIAGRAMS FOR PICTURE TUBES . . . . .</b>   | <b>668</b> |
| <b>CIRCUITS . . . . .</b>  | <b>670</b> |
| <b>INDEX . . . . .</b>   | <b>746</b> |



# Electrons, Electrodes and Electron Tubes

**T**HE electron tube is a marvelous device. It makes possible the performing of operations, amazing in conception, with a precision and a certainty that are astounding. It is an exceedingly sensitive and accurate instrument—the product of coordinated efforts of engineers and craftsmen. Its construction requires materials from every corner of the earth. Its use is world-wide.

The importance of the electron tube lies in its ability to control almost instantly the flight of the millions of electrons supplied by the cathode. It accomplishes this control with a minimum of energy. Because it is almost instantaneous in its action, the electron tube can operate efficiently and accurately at extremely high electrical frequencies.

## Electrons

All matter exists in the solid, liquid, or gaseous state. These three forms consist entirely of minute divisions known as molecules, which, in turn, are composed of atoms. Atoms have a nucleus which is a positive charge of electricity, around which revolve tiny charges of negative electricity known as **electrons**. Scientists have estimated that electrons weigh only 1/30-billion, billion, billion, billionths ( $\frac{1}{30} \times 10^{-30}$ ) of an ounce, and that they may travel at speeds of thousands of miles per second.

Electron movement may be accelerated by the addition of energy. Heat is one form of energy which can be conveniently used to speed up the electron.

For example, if the temperature of a metal is gradually raised, the electrons in the metal gain velocity. When the metal becomes hot enough, some electrons may acquire sufficient speed to break away from the surface of the metal. This action, which is accelerated when the metal is heated in a vacuum, is utilized in most electron tubes to produce the necessary electron supply.

An electron tube consists of a cathode, which supplies electrons, and one or more additional electrodes, which control and collect these electrons, mounted in an evacuated envelope. The envelope may be made of glass, metal, ceramic, or a combination of these materials.

## Cathodes

A cathode is an essential part of an electron tube because it supplies the electrons necessary for tube operation. When energy in some form is applied to the cathode, electrons are released. Heat is the form of energy generally used. The method of heating the cathode may be used to distinguish between the different forms of cathodes. For example, a directly heated cathode, or filament-cathode, is a wire heated by the passage of an electric current. An indirectly heated cathode, or heater-cathode, consists of a filament, or heater, enclosed in a metal sleeve. The sleeve carries the electron-emitting material on its outside surface and is heated by radiation and conduction from the heater.

A filament, or **directly heated cathode**, such as that shown in Fig. 1 may

be further classified by identifying the filament or electron-emitting material. The materials in regular use are tungsten, thoriated tungsten, and metals which have been coated with alkaline-earth oxides. Tungsten filaments are made from the pure metal. Because they must operate at high temperatures (a dazzling white) to emit sufficient electrons, a relatively large amount of filament power is required.

Thoriated-tungsten filaments are made from tungsten impregnated with thorium oxide. Due to the presence of thorium, these filaments liberate electrons at a more moderate temperature of about 1700°C (a bright yellow) and are, therefore, much more economical of filament power than are pure tungsten filaments.

Alkaline earths are usually applied as a coating on a nickel-alloy wire or ribbon. This coating, which is dried in a relatively thick layer on the filament, requires only a relatively low temperature of about 700-750°C (a dull red) to produce a copious supply of electrons. Coated filaments operate very efficiently and require relatively little filament power. However, each of these cathode materials has special advantages which determine the choice for a particular application.

Directly heated filament-cathodes require comparatively little heating power. They are used in tube types designed for battery operation because it is, of course, desirable to impose as small a drain as possible on the batteries. They are also used in rectifiers such as the 1G3GT/1B3GT and the 5Y3GT.

An **indirectly heated cathode**, or **heater-cathode**, consists of a thin metal sleeve coated with electron-emitting material such as alkaline-earth oxides. The emissive surface of the cathode is maintained at the required temperature (approximately 1050°K) by resistance-heating of a tungsten or tungsten-alloy wire which is placed inside the cathode sleeve and electrically insulated from it, as shown in Fig. 2. The heater is used only for the purpose of heating the cathode sleeve and sleeve coating to an electron-emitting temperature.

Useful emission does not take place from the heater wire.

A new dark heater insulating coating developed by RCA has better heat transfer than earlier aluminum-oxide coatings, and makes it possible to operate heaters at lower temperatures for given power inputs. Because the tensile strength of the heater wire increases at the lower operating temperatures, tubes using dark heaters have increased reliability, stability, and life.

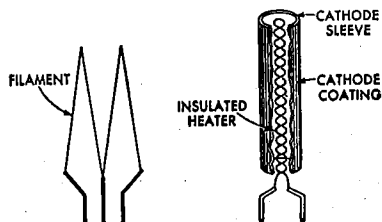


Fig. 1—Filament or directly heated cathode.

Fig. 2—Indirectly heated cathode or heater-cathode.

The heater-cathode construction is well adapted for use in electron tubes intended for operation from ac power lines and from storage batteries. The use of separate parts for emitter and heater functions, the electrical insulation of the heater from the emitter, and the shielding effect of the sleeve may all be utilized in the design of the tube to minimize the introduction of hum from the ac heater supply and to minimize electrical interference which might enter the tube circuit through the heater-supply line. From the viewpoint of circuit design, the heater-cathode construction offers advantages in connection flexibility because of the electrical separation of the heater from the cathode.

Another advantage of the heater-cathode construction is that it makes practical the design of a rectifier tube having close spacing between its cathode and plate, and of an amplifier tube having close spacing between its cathode and grid. In a close-spaced rectifier tube, the voltage drop in the tube is low, and, therefore, the regulation is improved. In an amplifier tube, the close spacing increases the gain obtainable from the tube. Because of the

advantages of the heater-cathode construction, almost all present-day receiving tubes designed for ac operation have heater-cathodes.

## Generic Tube Types

Electrons are of no value in an electron tube unless they can be put to work. Therefore, a tube is designed with the parts necessary to utilize electrons as well as those required to produce them. These parts consist of a cathode and one or more supplementary electrodes. The electrodes are enclosed in an evacuated envelope having the necessary connections brought out through air-tight seals. The air is removed from the envelope to allow free movement of the electrons and to prevent injury to the emitting surface of the cathode.

When the cathode is heated, electrons leave the cathode surface and form an invisible cloud in the space around it. Any positive electric potential within the evacuated envelope offers a strong attraction to the electrons (unlike electric charges attract; like charges repel). Such a positive electric potential can be supplied by an **anode** (positive electrode) located within the tube in proximity to the cathode.

## Diodes

The simplest form of electron tube contains two electrodes, a cathode and an anode (plate), and is often called a diode, the family name for a two-electrode tube. In a diode, the positive potential is supplied by a suitable electrical source connected between the plate terminal and a cathode terminal, as shown in Fig. 3. Under the influence of the positive plate potential, electrons




Fig. 3—Basic diode circuit.

flow from the cathode to the plate and return through the external plate-battery circuit to the cathode, thus completing the circuit. This flow of electrons is known as the **plate current**.

If a negative potential is applied to the plate, the free electrons in the space surrounding the cathode will be forced back to the cathode and no plate current will flow. If an alternating voltage is applied to the plate, the plate is alternately made positive and negative. Because plate current flows only during the time when the plate is positive, current flows through the tube in only one direction and is said to be rectified. Fig. 4 shows the rectified output current produced by an alternating input voltage.




Fig. 4—Current characteristics of rectifier circuit.

Diode rectifiers are used in ac receivers to convert the ac supply voltage to dc voltage for the electrodes of the other tubes in the receiver. Rectifier tubes having only one plate and one cathode, such as the 35W4, are called **half-wave rectifiers**, because current can flow only during one-half of the alternating-current cycle. When two plates and one or more cathodes are used in the same tube, current may be obtained on both halves of the ac cycle. The 6X4, 5Y3GT, and 5U4GB are examples of this type and are called **full-wave rectifiers**.

Not all of the electrons emitted by the cathode reach the plate. Some return to the cathode, while others remain in the space between the cathode and plate for a brief period to produce

an effect known as **space charge**. This charge has a repelling action on other electrons which leave the cathode surface and impedes their passage to the plate. The extent of this action and the amount of space charge depend on the cathode temperature, the distance between the cathode and the plate, and the plate potential. The higher the plate potential, the less is the tendency for electrons to remain in the space-charge region and repel other electrons. This effect may be noted by applying increasingly higher plate voltages to a tube operating at a fixed heater or filament voltage. Under these conditions, the maximum number of available electrons is fixed, but increasingly higher plate voltages will succeed in attracting a greater proportion of the free electrons.

Beyond a certain plate voltage, however, additional plate voltage has little effect in increasing the plate current because all of the electrons emitted by the cathode are already being drawn to the plate. This maximum current, illustrated in Fig. 5, is called **saturation current**. Because it is an indication of the total number of electrons emitted, it is also known as **emission current** or **simply emission**.




Fig. 5—Current characteristic of diode tube.

Although tubes are sometimes tested by measurement of their emission current, it is generally not advisable to measure the full value of emission because this value would be sufficiently large to cause change in the tube characteristics or even to damage the tube. Consequently, while the test value of emission current is somewhat larger than the maximum current which will be required from the cathode in the

use of the tube, it is ordinarily less than the full emission current. The emission test, therefore, is used to indicate whether the cathode can supply a sufficient number of electrons for satisfactory operation of the tube.

If space charge were not present to repel electrons coming from the cathode, the same plate current could be produced at a lower plate voltage. One way to make the effect of space charge small is to make the distance between plate and cathode small. This method is used in rectifier types having heater-cathodes, such as the 5V4GA and the 6AX5GT. In these types, the radial distance between cathode and plate is only about two hundredths of an inch.

Another method of reducing space-charge effect is utilized in **mercury-vapor rectifier tubes**. When such tubes are operated, a small amount of mercury contained in the tube is partially vaporized, filling the space inside the bulb with mercury atoms. These atoms are bombarded by electrons on their way to the plate. If the electrons are moving at a sufficiently high speed, the collisions tear off electrons from the mercury atoms. The mercury atom is then said to be "**ionized**," *i.e.*, it has lost one or more electrons and, therefore, has a positive charge. Ionization is evidenced by a bluish-green glow between the cathode and plate. When ionization occurs, the space charge is neutralized by the positive mercury atoms so that increased numbers of electrons are made available. Mercury-vapor tubes are used primarily for power rectifiers.

**Ionic-heated-cathode rectifiers** depend on gas ionization for their operation. These tubes are of the full-wave design and contain two anodes and a coated cathode sealed in a bulb containing a reduced pressure of inert gas. The cathode becomes hot during tube operation, but the heating effect is caused by bombardment of the cathode by ions within the tube rather than by heater or filament current from an external source.

The internal structure of an ionic-heated-cathode tube is designed so that when sufficient voltage is applied to the tube, ionization of the gas occurs be-

tween the anode which is instantaneously positive and the cathode. Under normal operating voltages, ionization does not take place between the anode that is negative and the cathode, so that the requirements for rectification are satisfied. The initial small flow of current through the tube is sufficient to raise the cathode temperature quickly to incandescence, whereupon the cathode emits electrons. The voltage drop in such tubes is slightly higher than that of the usual hot-cathode gas rectifiers because energy is taken from the ionization discharge to keep the cathode at operating temperature. Proper operation of these rectifiers requires a minimum flow of load current at all times to maintain the cathode at the temperature required to supply sufficient emission.

### Triodes

When a third electrode, called the **control grid**, is placed between the cathode and plate, the tube is known as a triode, the family name for a three-electrode tube. The grid usually consists of relatively fine wire wound on two support rods (siderods) and extending the length of the cathode. The spacing between turns of wire is large compared with the size of the wire so that the passage of electrons from cathode to plate is practically unobstructed by the grid. In some types, a **frame grid** is used. The frame consists of two siderods supported by four metal straps. Extremely fine lateral wire (diameter of 0.5 mil or less) is wound under tension around the frame. This type of grid permits the use of closer spacings between grid wires and between tube electrodes, and thus improves tube performance.

The purpose of the grid is to control the flow of plate current. When a tube is used as an amplifier, a negative dc voltage is usually applied to the grid. Under this condition the grid does not draw appreciable current.

The number of electrons attracted to the plate depends on the combined effect of the grid and plate polarities, as shown in Fig. 6. When the plate is positive, as is normal, and the dc grid volt-

age is made more and more negative, the plate is less able to attract electrons to it and plate current decreases. When the grid is made less and less negative (more and more positive), the plate more readily attracts electrons to it and plate current increases. Hence, when the voltage on the grid is varied in accordance with a signal, the plate current varies with the signal. Because a small voltage applied to the grid can control a comparatively large amount of plate current, the signal is amplified by the tube. Typical three-electrode tube types are the 6C4 and 6AF4A.

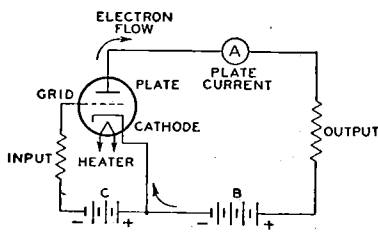


Fig. 6—Basic triode circuit.

The grid, plate, and cathode of a triode form an electrostatic system, each electrode acting as one plate of a small capacitor. The capacitances are those existing between grid and plate, plate and cathode, and grid and cathode. These capacitances are known as **inter-electrode capacitances**. Generally, the capacitance between grid and plate is of the most importance. In high-gain radio-frequency amplifier circuits, this capacitance may act to produce undesired coupling between the **input circuit**, the circuit between grid and cathode, and the **output circuit**, the circuit between plate and cathode. This coupling is undesirable in an amplifier because it may cause instability and unsatisfactory performance.

### Tetrodes

The capacitance between control grid and plate can be made small by mounting an additional electrode, called the **screen grid** (grid No. 2), in the tube. With the addition of the grid No. 2, the tube has four electrodes and is, accordingly, called a tetrode. The screen

grid or grid No. 2 is mounted between the grid No. 1 (**control grid**) and the plate, as shown in Fig. 7, and acts as an electrostatic shield between them, thus reducing the grid-to-plate capacitance. The effectiveness of this shielding action is increased by a bypass




Fig. 7—Basic tetrode circuit.

capacitor connected between screen grid and cathode. By means of the screen grid and this bypass capacitor, the grid-plate capacitance of a tetrode is made very small. In practice, the grid-plate capacitance is reduced from several picofarads (pF) for a triode to 0.01 pF or less for a screen-grid tube.

The screen grid has another desirable effect in that it makes plate current practically independent of plate voltage over a certain range. The screen grid is operated at a positive voltage and, therefore, attracts electrons from the cathode. However, because of the comparatively large space between wires of the screen grid, most of the electrons drawn to the screen grid pass through it to the plate. Hence, the screen grid supplies an electrostatic force pulling electrons from the cathode to the plate. At the same time, the screen grid shields the electrons between cathode and screen grid from the plate so that the plate exerts very little electrostatic force on electrons near the cathode.

So long as the plate voltage is higher than the screen-grid voltage, plate current in a screen-grid tube depends to a great degree on the screen-grid voltage and very little on the plate voltage. The fact that plate current in a screen-grid tube is largely independent of plate voltage makes it possible to obtain much higher amplification with a tetrode than with a triode. The

low grid-plate capacitance makes it possible to obtain this high amplification without plate-to-grid feedback and resultant instability. In receiving-tube applications, the tetrode has been replaced to a considerable degree by the pentode.

## Pentodes

In all electron tubes, electrons striking the plate may, if moving at sufficient speed, dislodge other electrons. In two- and three-electrode types, these dislodged electrons usually do not cause trouble because no positive electrode other than the plate itself is present to attract them. These electrons, therefore, are drawn back to the plate. Emission caused by bombardment of an electrode by electrons from the cathode is called **secondary emission** because the effect is secondary to the original cathode emission.

In the case of screen-grid tubes, the proximity of the positive screen grid to the plate offers a strong attraction to these secondary electrons, and particularly so if the plate voltage swings lower than the screen-grid voltage. This effect reduces the plate current and limits the useful plate-voltage swing for tetrodes.

The effects of secondary emission are minimized when a fifth electrode is placed within the tube between the screen grid and plate. This fifth electrode is known as the **suppressor grid** (grid No. 3) and is usually connected to the cathode, as shown in Fig. 8. Because of its negative potential with respect to the plate, the suppressor grid retards the flight of secondary electrons and diverts them back to the plate.

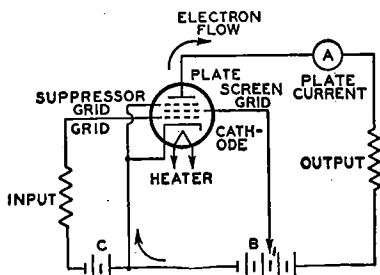


Fig. 8—Basic pentode circuit.



The family name for a five-electrode tube is "pentode." In power-output pentodes, the suppressor grid makes possible higher power output with lower grid-driving voltage; in radio-frequency amplifier pentodes, the suppressor grid makes possible high voltage amplification at moderate values of plate voltage. These desirable features result from the fact that the plate-voltage swing can be made very large. In fact, the plate voltage may be as low as, or lower than, the screen-grid voltage without serious loss in signal-gain capability. Representative pentodes used for power amplification are the 6CL6 and 6K6GT; representative pentodes used for voltage amplification are the 6AU6A, 6BA6, and 5879.

### Beam Power Tubes

A beam power tube is a tetrode or pentode in which directed electron beams are used to increase substantially the power-handling capability of the tube. Such a tube contains a cathode, a control grid (grid No. 1), a screen grid (grid No. 2), a plate, and, optionally, a suppressor grid (grid No. 3). When a beam power tube is designed without an actual suppressor grid, the electrodes are so spaced that secondary emission from the plate is suppressed by space-charge effects between screen grid and plate. The space charge is produced by the slowing up of electrons traveling from a high-potential screen grid to a lower-potential plate. In this low-velocity region, the space charge produced is sufficient to repel secondary electrons emitted from the plate and to cause them to return to the plate.

Beam power tubes of this design employ beam-confining electrodes at cathode potential to assist in producing the desired beam effects and to prevent stray electrons from the plate from returning to the screen grid outside of the beam. A feature of a beam power tube is its low screen-grid current. The screen grid and the control grid are spiral wires wound so that each turn of the screen grid is shaded from the cathode by a grid turn. This alignment of the screen

grid and control grid causes the electrons to travel in sheets between the turns of the screen grid so that very few of them strike the screen grid. Because of the effective suppressor action provided by space charge and because of the low current drawn by the screen grid, the beam power tube has the advantages of high power output, high power sensitivity, and high efficiency.

Fig. 9 shows the structure of a beam power tube employing space-charge suppression and illustrates how

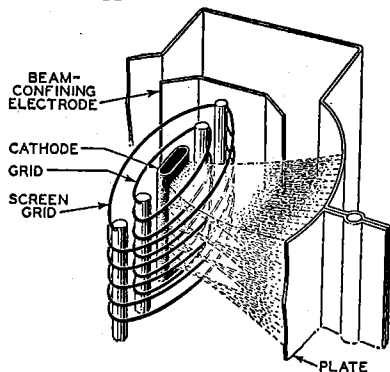


Fig. 9—Structure of beam power tube showing beam-confining action.

the electrons are confined to beams. The beam condition illustrated is that for a plate potential less than the screen-grid potential. The high-density space-charge region is indicated by the heavily dashed lines in the beam. Note that the edges of the beam-confining electrodes coincide with the dashed portion of the beam. In this way the space-charge potential region is extended beyond the beam boundaries and stray secondary electrons are prevented from returning to the screen grid outside of the beam. The space-charge effect may also be obtained by use of an actual suppressor grid. Examples of beam power tubes are 6AQ5A, 6L6GC, 6V6GTA, and 50C5.

### Multi-Electrode and Multi-Unit Tubes

Early in the history of tube devel-

opment and application, tubes were designed for a general service; that is, a single tube type—a triode—was used as a radio-frequency amplifier, an intermediate-frequency amplifier, an audio-frequency amplifier, an oscillator, or a detector. Obviously, with this diversity of application, one tube did not meet all requirements to the best advantage.

Later and present trends of tube design are the development of "specialty" types. These types are intended either to give optimum performance in a particular application or to combine in one bulb functions which formerly required two or more tubes. The first class of tubes includes such examples of specialty types as the 6CB6A and 6BY6. Types of this class generally require more than three electrodes to obtain the desired special characteristics and may be broadly classed as multi-electrode types. The 6BY6 is an especially interesting type in this class. This tube has an unusually large number of electrodes, namely seven, exclusive of the heater. Plate current in the tube is varied at two different frequencies at the same time. The tube is designed primarily for use as a combined sync separator and sync clipper in television receivers.

The second class includes multi-unit tubes such as the twin-diode triodes 6CN7 and 6AV6, as well as triode-pentodes such as the 6EA8 and 6GH8A. This class also includes class A twin triodes such as the 6FQ7/6CG7 and 12AX7A, and types such as the 6CM7 containing dissimilar triode units used primarily as combined vertical oscillators and vertical deflection amplifiers in television receivers. Full-wave rectifiers are also multi-unit types.

A third class of tubes combines features of each of the other two classes. Typical of this third class are the pentagrid-converter types 6BE6 and 6SA7. These tubes are similar to the multi-electrode types in that they have seven electrodes, all of which affect the electron stream; and they are similar to the multi-unit tubes in that they perform simultaneously the double function of oscillator and mixer in superheterodyne receivers.

## Receiving Tube Structure

Receiving tubes generally utilize a glass or metal envelope and a base. Originally, the base was made of metal or molded phenolic material. Types having a glass envelope and a molded phenolic base include the "octal" types such as the 5U4GB and the 6SN7GTB. Types having a metal envelope and molded phenolic octal base include the 6V6 and the 6L6. Many modern types utilize integral glass bases. Present-day conventional tube designs utilizing glass envelopes and integral glass bases include the seven-pin and nine-pin **miniature** types, the nine-pin **novar** and **neonoval** types, and the twelve-pin **duodecar** types. Examples of the seven-pin miniature types are the 6AU6A and 6AV6. Examples of the nine-pin miniature types are the 12AU7A and 6EA8. Examples of the novar types are the 6CJ3 and 7868. The nine-pin base for the novar types has a relatively large pin-circle diameter and long pins to insure firm retention of the tube in its socket.

The **nuvistor** concept provided a new approach to electron tube design. Nuvistor tubes utilize a light-weight cantilever-supported cylindrical electrode structure housed in a ceramic-metal envelope. These tubes combine new materials, processes, and fabrication techniques. Examples of the nuvistor are the 6CW4 and the 6DV4.

## Television Picture Tubes

The picture tube, or kinescope, is a multi-electrode tube used principally in television receivers for picture display. It consists essentially of an electron gun, a glass or metal-and-glass envelope and faceplate combination, and a fluorescent screen.

The electron gun includes a cathode for the production of free electrons, one or more control electrodes for accelerating the electrons in the beam, and, optionally, a device for "trapping" unwanted ions out of the electron beam.

Focusing of the beam is accomplished either electromagnetically by

means of a focusing coil placed on the neck of the tube, or electrostatically, as shown in Fig. 10, by means of a focusing electrode (grid No. 4) within the envelope of the tube. The screen is a white-fluorescing phosphor P4 of either the silicate or the sulfide type.

Deflection of the beam is accomplished either electrostatically by means of deflecting electrodes within the envelope of the tube, or electromagnetically by means of a deflecting yoke placed on the neck of the tube. Fig. 10 shows the structure of the gun section of a picture tube and illustrates how the electron beam is formed and how the beam is deflected by means of an electromagnetic deflecting yoke. In this type of tube, ions in the beam are prevented from damaging the fluorescent screen by an aluminum film on the gun side of the screen. This film not only "traps" unwanted ions, but also improves picture contrast. In many types of non-aluminized tubes, ions are separated from the electron beam by means of a tilted-gun and ion-trap-magnet arrangement.

Color television picture tubes are similar to black-and-white picture tubes, but differ in three major ways: (1) The light-emitting screen is made up of trios

of phosphor dots deposited in an interlaced pattern. Each dot of a trio is capable of emitting light in one of the three primary colors (red, green, or blue). (2) A shadow mask mounted near the screen of the tube contains over 300,000 apertures, one for each of the phosphor dot trios. This mask provides color separation by shadowing two of the three phosphor dots of each trio. (3) Three closely spaced electron guns, built as a unit, provide separate beams for excitation of the three different color-phosphor-dot arrays. Thus it is possible to control the brightness of each of the three colors independently of the other two. Fig. 11 shows a cut-away view of a color television picture tube.

The three electron guns are mounted with their axes tilted toward the central axis of the envelope, and are spaced 120 degrees with respect to each other. The focusing electrodes of the three guns are interconnected internally, and their potential is adjusted to cause the separate beams to focus at the phosphor-dot screen. All three beams must be made to converge at the screen while they are simultaneously being deflected. Convergence is accomplished by the action of static and

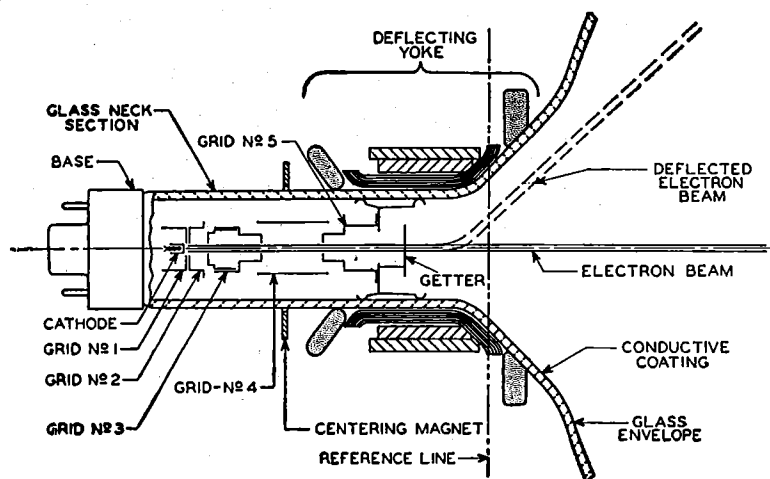


Fig. 10—Structure of television-picture-tube electron gun.

dynamic magnetic fields set up by the radial-converging magnet assembly mounted on the neck of the tube. These fields are coupled into the radial-converging pole pieces within the tube. Another pair of pole pieces in the tube is activated by the lateral-converging magnet also mounted on the neck of the tube. These pole pieces permit lateral shift in position of the blue beam in opposition to the lateral shift of the green and red beams.

A purifying magnet is used with color picture tubes to provide a magnetic field, adjustable in magnitude and direction, to effect register over the entire area of the screen. A magnetic shield is used to minimize the effects of the earth's magnetic field.

Deflection of the three beams is accomplished simultaneously by a deflecting yoke using four electromagnetic coils similar to the deflecting yoke used for black-and-white picture tubes.

A totally new concept in color television display systems utilizing an advanced design of electron gun, deflection yoke, and picture tube has

been developed by RCA. Instead of dots, this tube utilizes a screen consisting of continuous vertical phosphor lines of alternating green, red, and blue emitting phosphors. The mask apertures are vertical slits with small cross ties to provide strength. This line-screen arrangement has the advantage of reducing beam-to-phosphor misregister, enhancing color purity, and improving white uniformity.

The electron gun of this tube uses a horizontal in-line structure rather than the  $120^\circ$  spacing of the phosphor-dot tube and is designed for use with a precision static toroid line-focus-type deflecting yoke. With this structure, the three beams and the deflecting field are in precise alignment. As a result, this precision in-line tube assembly is inherently self-converging and does not require dynamic convergence correction or its associated circuitry. Consequently, the deflecting yoke and neck components can be pre-adjusted and permanently attached to the picture tube by the tube manufacturer.

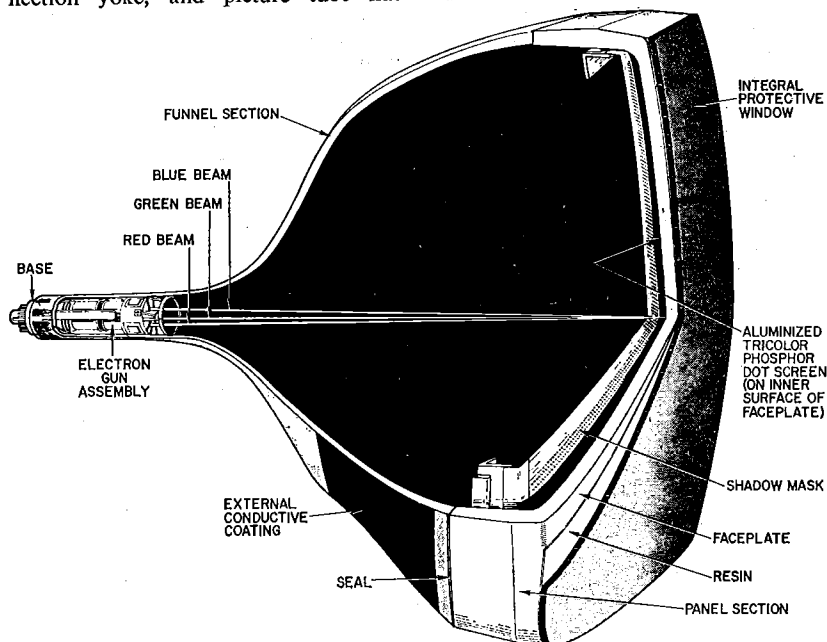


Fig. 11—Cutaway view of color television picture tube.

# Electron Tube Characteristics

THE term "characteristics" is used to identify the distinguishing electrical features and values of an electron tube. These values may be shown in curve form or they may be tabulated. When the characteristics values are given in curve form, the curves may be used for the determination of tube performance and the calculation of additional tube factors.

Tube characteristics are obtained from electrical measurements of a tube in various circuits under certain definite conditions of voltages. Characteristics may be further described by denoting the conditions of measurements. For example, Static Characteristics are the values obtained with different dc potentials applied to the tube electrodes, while Dynamic Characteristics are the values obtained with an ac voltage on a control grid under various conditions of dc potentials on the electrodes. The dynamic characteristics, therefore, are indicative of the performance capabilities of a tube under actual working conditions.

Static characteristics may be shown by plate characteristics curves and transfer (mutual) characteristics curves. These curves present the same information, but in two different forms to increase its usefulness. The plate characteristic curve is obtained by varying plate voltage and measuring plate current for different grid-bias voltages, while the transfer-characteristic curve is obtained by varying grid-bias voltage and measuring plate current for different plate voltages. A plate-characteristic family of curves is shown in Fig. 12. Fig. 13 gives the transfer-characteristic family of curves for the same tube.

Dynamic characteristics include amplification factor, plate resistance, control-grid—plate transconductance, and certain detector characteristics, and may be shown in curve form for variations in tube operating conditions.




Fig. 12—Family of plate-characteristic curves.

The amplification factor, or  $\mu$ , is the ratio of the change in plate voltage to a change in control-electrode voltage in the opposite direction, under the condition that the plate current remains




Fig. 13—Family of transfer-characteristic curves.

unchanged and that all other electrode voltages are maintained constant. For example, if, when the plate voltage is made 1 volt more positive, the control-electrode (grid-No. 1) voltage must be made 0.1 volt more negative to hold plate current unchanged, the amplification factor is 1 divided by 0.1, or 10. In other words, a small voltage variation in the grid circuit of a tube has the same effect on the plate current as a large plate-voltage change—the latter equal to the product of the grid-voltage change and amplification factor. The  $\mu$  of a tube is often useful for

calculating stage gain. This use is discussed in the **Electron Tube Applications** section.

**Plate resistance** ( $r_p$ ) of an electron tube is the resistance of the path between cathode and plate to the flow of alternating current. It is the quotient of a small change in plate voltage divided by the corresponding change in plate current and is expressed in ohms, the unit of resistance. Thus, if a change of 0.1 milliamperes (0.0001 ampere) is produced by a plate-voltage variation of 1 volt, the plate resistance is 1 divided by 0.0001, or 10000 ohms.

**Control grid-to-plate transconductance**, or simply **transconductance** ( $g_m$ ), is a factor which combines in one term the amplification factor and the plate resistance, and is the quotient of the first divided by the second. This term has also been known as mutual conductance. Transconductance may be more strictly defined as the quotient of a small change in plate current (amperes) divided by the small change in the control-grid voltage producing it, under the condition that all other voltages remain unchanged. Thus, if a grid-voltage change of 0.5 volt causes a plate-current change of 1 milliamperes (0.001 ampere), with all other voltages constant, the transconductance is 0.001 divided by 0.5, or 0.002 mho. A "mho" is the unit of conductance and was named by spelling ohm backwards. For convenience, a millionth of a mho, or a micromho ( $\mu\text{mho}$ ), is used to express transconductance. Thus, in the example, 0.002 mho is 2000 micromhos.

**Conversion transconductance** ( $g_c$ ) is a characteristic associated with the mixer (first detector) function of tubes and may be defined as the quotient of the intermediate-frequency (if) current in the primary of the if transformer divided by the applied radio-frequency (rf) voltage producing it; more precisely, it is the limiting value of this quotient as the rf voltage and if current approach zero. When the performance of a frequency converter is determined, conversion transconductance is used in the same way as control grid-to-plate

transconductance is used in single-frequency amplifier computations.

The **plate efficiency** of a power amplifier tube is the ratio of the ac power output ( $P_o$ ) to the product of the average dc plate voltage ( $E_b$ ) and dc plate current ( $I_b$ ) at full signal, or

$$\text{Plate efficiency} = \frac{P_o \text{ watts}}{E_b \text{ volts} \times I_b \text{ amperes}} \times 100\%$$

The **power sensitivity** of a tube is the ratio of the power output to the square of the input signal voltage ( $E_{in}$ ), and is expressed in mhos as follows:

$$\text{Power sensitivity (mhos)} = \frac{P_o \text{ watts}}{(E_{in, \text{ rms}})^2}$$

## X-RADIATION CHARACTERISTICS OF TELEVISION PICTURE TUBES

X-rays are produced when the atoms of a material are bombarded by electrons (or ions). The relative intensity and spectral energy distribution of the X-radiation at the source are determined by the accelerating voltage, the electron (or ion) current, and the atomic number of the bombarded materials. Because of the selective filtering effect of the glass bulb and/or of other tube components, the relative intensity external to the tube is given by the following relationship:

$$\text{Relative Intensity} \propto iV^nZ$$

where

- $i$  = current
- $V$  = accelerating voltage
- $Z$  = atomic number of the "target"

In present monochrome and color picture tubes, which use high absorption glass, "n" is the order of 20.

X-radiation also may be produced in the neck by stray electrons (or ions) that are accelerated by voltages that may be as high as the anode voltage. This radiation is independent of that produced by the beam and, in fact, may be produced when there is no beam current; it is dependent upon voltages that are related to interelectrode potential differences or charge patterns on the glass, and upon leakage currents.



# Electron Tube Applications

**T**HE diversified applications of an electron receiving tube have, within the scope of this section, been treated under seven headings: Rectification; Detection; Amplification; TV Scanning, Sync, and Deflection; Oscillation; Frequency Conversion; and Tuning Indication with Electron-Ray Tubes. Although these operations may take place at either radio or audio frequencies and may involve the use of different circuits and different supplemental parts, the general considerations of each kind of operation are basic.

## General System Functions

When speech, music, or video information is transmitted from a radio or television station, the station radiates a modulated radio-frequency (rf) carrier. The function of a radio or television receiver is simply to reproduce the modulating wave from the modulated carrier.

As shown in Fig. 14, a superheterodyne radio receiver picks up the transmitted modulated rf signal, amplifies it, converts it to a modulated intermediate-frequency (if) signal, amplifies the modulated if signal, separates the modulating signal from the basic carrier wave (Detection), and amplifies the

resulting audio signal to a level sufficient to produce the desired volume in a speaker. In addition, the receiver usually includes some means of producing automatic gain control (agc) of the modulated signal before the audio information is separated from the carrier.

The transmitted rf signal picked up by the radio receiver may contain either amplitude modulation (AM) or frequency modulation (FM). (These modulation techniques are described later in the section on **Detection**.) In either case, amplification prior to the detector stage is performed by tuned amplifier circuits designed for the proper frequency and bandwidth. Frequency conversion is performed by mixer and oscillator circuits or by a single converter stage which performs both mixer and oscillator functions. Separation of the modulating signal is normally accomplished by one or more diodes in a detector or discriminator circuit. Amplification of the audio signal is then performed by one or more audio amplifier stages.

Audio-amplifier systems for phonograph or tape recordings are similar to the stages after detection in a radio receiver. The input to the amplifier is a low-power-level audio signal from the

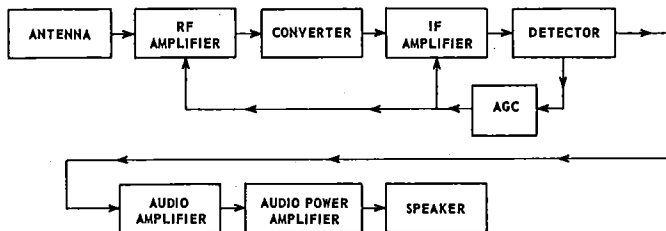


Fig. 14—Simplified block diagram for a broadcast-band receiver.

phonograph or magnetic-tape pickup head. This signal is usually amplified through a preamplifier stage, one or more low-level (pre-driver or driver) audio stages, and an audio power amplifier. The system may also include frequency-selective circuits which act as equalization networks and/or tone controls.

The operation of a television receiver is more complex than that of a radio receiver, as shown by the simplified block diagram in Fig. 15. The tuner section of the receiver selects the proper rf signals for the desired channel frequency, amplifies them, and converts them to a lower intermediate frequency.

formation to the television picture tube and thus controls instantaneous "spot" brightness. At the same time, deflection circuits cause the electron beam of the picture tube to move the "spot" across the faceplate horizontally and vertically. Special "sync" signals derived from the video signal assure that the horizontal and vertical scanning are timed so that the picture produced on the receiver exactly duplicates the picture being viewed by the camera or pickup tube.

A communications transceiver contains transmitting circuits, as well as receiving circuits similar to those of a radio receiver. The transmitter portion

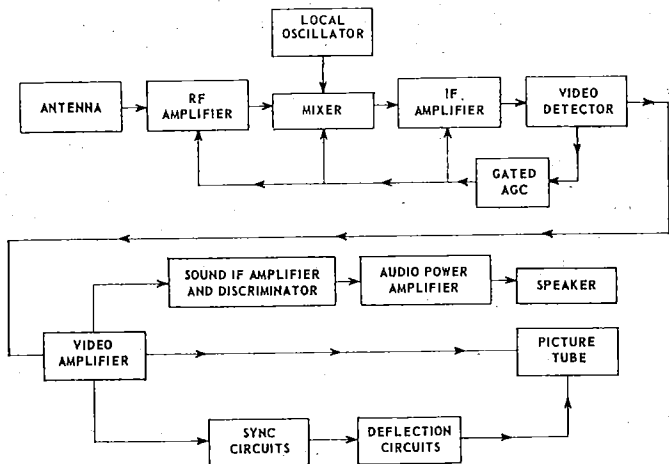


Fig. 15—Simplified block diagram for a black-and-white television receiver.

As in a radio receiver, these functions are accomplished in rf-amplifier, mixer, and local-oscillator stages. The if signal is then amplified in if-amplifier stages which provide the additional gain required to bring the signal level to an amplitude suitable for detection of the video information.

After detection, the video signal is amplified and separated into sound and picture information. The sound signal is amplified and processed to provide an audio signal which is fed to an audio amplifier system similar to those described above. The picture (video) signal is passed through a video amplifier stage which conveys beam-intensity in-

formation to the television picture tube and thus controls instantaneous "spot" brightness. At the same time, deflection circuits cause the electron beam of the picture tube to move the "spot" across the faceplate horizontally and vertically. Special "sync" signals derived from the video signal assure that the horizontal and vertical scanning are timed so that the picture produced on the receiver exactly duplicates the picture being viewed by the camera or pickup tube.

of such a system consists of two sections. In one section, the desired intelligence (voice, code, or the like) is picked up and amplified through one or more amplifier stages (which are usually common to the receiver portion) to a high-level stage called a modulator. In the other section, an rf signal of the desired frequency is developed in an oscillator stage and amplified in one or more rf-amplifier stages. The audio-frequency (af) modulating signal is impressed on the rf carrier in the final rf-power-amplifier stage (high-level modulation), in the rf low-level stage (low-level modulation), or in both. Fig. 16 shows a simplified block diagram of the trans-

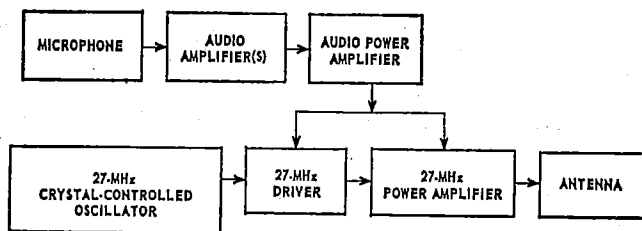


Fig. 16—Simplified block diagram for the transmitter portion of a 27-MHz communications receiver.

mitter portion of a citizens-band transceiver that operates at a frequency of 27 MHz (megacycles per second). The transmitting section of a communications system may also include frequency-multiplier circuits which raise the frequency of the developed rf signal as required.

### Rectification

The rectifying action of a diode finds important applications in supplying a receiver with dc power from an ac line and in supplying high dc voltage from a high-voltage pulse. A typical arrangement for converting ac to dc includes a rectifier tube, a filter, and a voltage divider. The rectifying action of the tube is explained briefly under **Diodes**, in the **Electrons, Electrodes, and Electron Tubes** section. High-voltage pulse rectification is described later under **Horizontal Output Circuits**.

The function of a filter is to smooth out the ripple of the tube out-

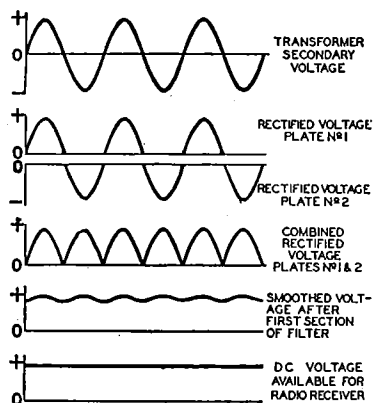


Fig. 17—Voltage waveforms of full-wave rectifier circuit.

put, as indicated in Fig. 17, and to increase rectifier efficiency. The action of the filter is explained in the **Electron Tube Installation** section under **Filters**. The voltage divider is used to cut down the output voltage to the values required by the plates and the other electrodes of the tubes in the receiver.

A **half-wave rectifier** and a **full-wave rectifier** circuit are shown in Fig. 18. In the half-wave circuit, current

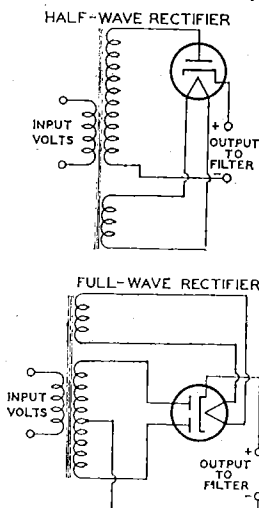


Fig. 18—Half-wave and full-wave rectifier circuits.

flows through the rectifier tube to the filter on every other half-cycle of the ac input voltage when the plate is positive with respect to the cathode. In the full-wave circuit, current flows to the filter on every half-cycle, through plate No. 1 on one half-cycle when plate No. 1 is positive with respect to the cathode, and through plate No. 2 on the next

half-cycle when plate No. 2 is positive with respect to the cathode.

Because the current flow to the filter is more uniform in the full-wave circuit than in the half-wave circuit, the output of the full-wave circuit requires less filtering. Rectifier operating information and circuits are given under each rectifier tube type and in the **Circuits** section, respectively.

**Parallel operation** of rectifier tubes furnishes an output current greater than that obtainable with the use of one tube. For example, when two full-wave rectifier tubes are connected in parallel, the plates of each tube are connected together and each tube acts as a half-wave rectifier. The permissible voltage and load conditions per tube are the same as for full-wave service but the total load-current-handling capability of the complete rectifier is approximately doubled.

When mercury-vapor rectifier tubes are connected in parallel, a stabilizing resistor of 50 to 100 ohms should be connected in series with each plate lead in order that each tube will carry an equal share of the load current. The value of the resistor to be used will depend on the amount of plate current that passes through the rectifier. Low plate current requires a high value; high plate current, a low value. When the plates of mercury-vapor rectifier tubes are connected in parallel, the corresponding filament leads should be similarly connected. Otherwise, the tube drops will be considerably unbalanced and larger stabilizing resistors will be required.

Two or more vacuum rectifier tubes can also be connected in parallel to give correspondingly higher output current and, as a result of paralleling their internal resistances, give somewhat increased voltage output. With vacuum types, stabilizing resistors may or may not be necessary depending on the tube type and the circuit.

A **voltage-doubler** circuit of simple form is shown in Fig. 19. The circuit derives its name from the fact that its dc voltage output can be as high as twice the peak value of ac input. Basically, a voltage doubler is a rectifier cir-

cuit arranged so that the output voltages of two half-wave rectifiers are in series.

The action of a voltage doubler can be described briefly as follows. On the positive half-cycle of the ac input, that is, when the upper side of the ac input line is positive with respect to the lower side, the upper diode passes current and feeds a positive charge into the upper capacitor. As positive charge accumulates on the upper plate of the capacitor, a positive voltage builds up across the capacitor. On the next half-cycle of the ac input, when the upper side of the line is negative with respect to the lower side, the lower diode passes current so that




Fig. 19—Full-wave voltage-doubler circuit.

a negative voltage builds up across the lower capacitor.

So long as no current is drawn at the output terminals from the capacitor, each capacitor can charge up to a voltage of magnitude  $E$ , the peak value of the ac input. It can be seen from the diagram that with a voltage of  $+E$  on one capacitor and  $-E$  on the other, the total voltage across the capacitors is  $2E$ . Thus the voltage doubler supplies a no-load dc output voltage twice as large as the peak ac input voltage. When current is drawn at the output terminals by the load, the output voltage drops below  $2E$  by an amount that depends on the magnitude of the load current and the capacitance of the capacitors. The arrangement shown in Fig. 19 is called a full-wave voltage doubler because each rectifier passes current to the load on each half of the ac input cycle.

A rectifier type especially designed for use as a voltage doubler is the 25Z6GT. This tube combines two separate diodes in one tube. As a voltage doubler, the tube is used in "transformerless" receivers. In these receivers, the heaters of all tubes in the set

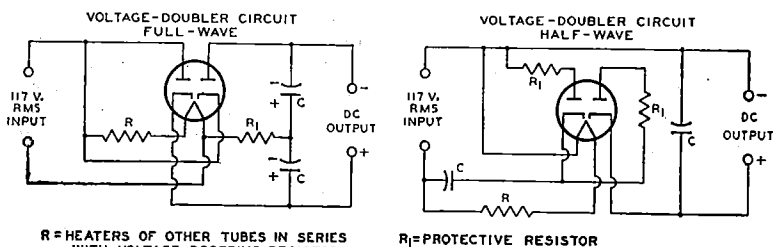


Fig. 20—Full-wave and half-wave voltage-doubler circuits showing heater-supply connections.

are connected in series with a voltage-dropping resistor across the line. The connections for the heater supply and the voltage-doubler circuit are shown in Fig. 20.

With the full-wave voltage-doubler circuit in Fig. 20, it will be noted that the dc load circuit cannot be connected to ground or to one side of the ac supply line. This circuit presents certain disadvantages when the heaters of all the tubes in the set are connected in series with a resistance across the ac line. Such a circuit arrangement may cause hum because of the high ac potential between the heaters and cathodes of the tubes.

The half-wave voltage-doubler circuit in Fig. 20 overcomes this difficulty by making one side of the ac line common with the negative side of the dc load circuit. In this circuit, one half of the tube is used to charge a capacitor which, on the following half cycle, discharges in series with the line voltage through the other half of the tube. This circuit is called a half-wave voltage doubler because rectified current flows to the load only on alternate halves of the ac input cycle. The voltage regulation of this arrangement is somewhat poorer than that of the full-wave voltage doubler.

## Detection

When speech, music, or video information is transmitted from a radio or television station, the station radiates a radio-frequency (rf) wave which is of either of two general types. In one type, the wave is said to be amplitude modulated when its frequency remains constant and the amplitude is varied. In the other type, the wave is said to be frequency modulated when its amplitude remains essentially constant but its frequency is varied.

The function of the receiver is to reproduce the original modulating wave from the modulated rf wave. The receiver stage in which this function is performed is called the **demodulator** or **detector** stage.

### AM Detection

The effect of **amplitude modulation** on the waveform of the rf wave is shown in Fig. 21. There are three different basic circuits used for the detection of amplitude-modulated waves: the diode detector, the grid-bias detector, and the grid-resistor detector. These circuits are alike in that they eliminate, either partially or completely, alternate half-cycles of the rf wave. With alternate half-cycles removed, the audio variations of the other half-cycles can be

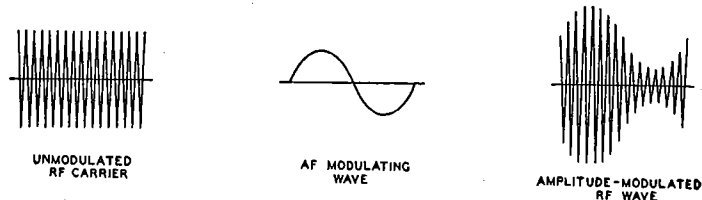


Fig. 21—Waveforms showing effect of amplitude modulation on an rf wave.

amplified to drive headphones or a loud-speaker.

A diode-detector circuit is shown in Fig. 22. The action of this circuit when a modulated rf wave is applied is




Fig. 22—Basic diode-detector circuit.

illustrated by Fig. 23. The rf voltage applied to the circuit is shown in light line; the output voltage across capacitor C is shown in heavy line.

Between points (a) and (b) on the first positive half-cycle of the applied rf voltage, capacitor C charges up to the peak value of the rf voltage. Then as the applied rf voltage falls away from its peak value, the capacitor holds the cathode at a potential more positive than the voltage applied to the anode.




Fig. 23—Waveforms showing modulated rf input (light line) and output voltage (heavy line) of diode-detector circuit.

The capacitor thus temporarily cuts off current through the diode. While the diode current is cut off, the capacitor discharges from (b) to (c) through the diode load resistor R.

When the rf voltage on the anode rises high enough to exceed the potential at which the capacitor holds the cathode, current flows again and the capacitor charges up to the peak value of the second positive half-cycle at (d). In this way, the voltage across the capacitor follows the peak value of the applied rf voltage and reproduces the af modulation.

The curve for voltage across the capacitor, as shown in Fig. 23, is somewhat jagged. However, this jaggedness, which represents an rf component in the voltage across the capacitor, is

exaggerated in the drawing. In an actual circuit the rf component of the voltage across the capacitor is negligible. Hence, when the voltage across the capacitor is amplified, the output of the amplifier reproduces the speech or music originating at the transmitting station.

Another way to describe the action of a diode detector is to consider the circuit as a half-wave rectifier. When the rf signal on the plate swings positive, the tube conducts and the rectified current flows through the load resistance R. Because the dc output voltage of a rectifier depends on the voltage of the ac input, the dc voltage across C varies in accordance with the amplitude of the rf carrier and thus reproduces the af signal. Capacitor C should be large enough to smooth out rf or if variations, but should not be so large as to affect the audio variations. Two diodes can be connected in a circuit similar to a full-wave rectifier to provide full-wave detection. However, in practice, the advantages of this connection generally do not justify the extra circuit complication.

The diode method of detection produces less distortion than other methods because the dynamic characteristics of a diode can be made more linear than those of other detectors. The disadvantages of a diode are that it does not amplify the signal, and that it draws current from the input circuit and therefore reduces the selectivity of the input circuit. However, because the diode method of detection produces less distortion and because it permits the use of simple avc circuits without the necessity for an additional voltage supply, the diode method of detection is most widely used in broadcast receivers.

A typical diode-detector circuit using a diode-triode tube is shown in Fig. 24.  $R_1$  is the diode load resistor. A portion of the af voltage developed across this resistor is applied to the triode grid through the volume control  $R_a$ . In a typical circuit, resistor  $R_1$  may be tapped so that five-sixths of the total af voltage across  $R_1$  is applied to the volume control. This tapped connection reduces the af voltage output of the detector circuit slightly, but it



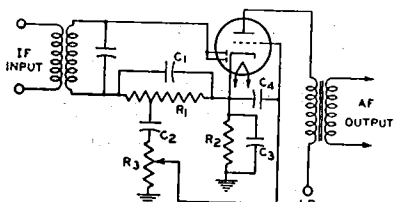


Fig. 24—Typical diode-detector circuit using a twin diode-triode tube.

reduces audio distortion and improves the rf filtering.

DC bias for the triode section is provided by the cathode-bias resistor  $R_2$  and the audio bypass capacitor  $C_3$ . The function of capacitor  $C_2$  is to block the dc bias of the cathode from the grid. The function of capacitor  $C_1$  is to bypass any rf voltage on the grid to cathode. A diode-pentode may also be used in this circuit. With a pentode, the af output should be resistance-coupled rather than transformer-coupled.

Another diode-detector circuit, called a diode-biased circuit, is shown in Fig. 25. In this circuit, the triode grid

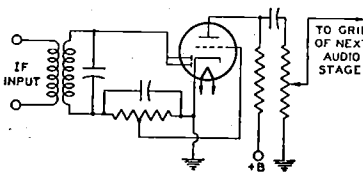


Fig. 25—Diode-biased detector circuit.

is connected directly to a tap on the diode load resistor. When an rf signal voltage is applied to the diode, the dc voltage at the tap supplies bias to the triode grid. When the rf signal is modulated, the af voltage at the tap is applied to the grid and is amplified by the triode.

The advantage of the circuit shown in Fig. 25 over the self-biased arrangement shown in Fig. 24 is that the diode-biased circuit does not employ a capacitor between the grid and the diode load resistor, and consequently does not produce as much distortion of a signal having a high percentage of modulation.

However, there are restrictions on the use of the diode-biased circuit. Be-

cause the bias voltage on the triode depends on the average amplitude of the rf voltage applied to the diode, the average amplitude of the voltage applied to the diode should be constant for all values of signal strength at the antenna. Otherwise there will be different values of bias on the triode grid for different signal strengths and the triode will produce distortion. Because there is no bias applied to the diode-biased triode when no rf voltage is applied to the diode, sufficient resistance should be included in the plate circuit of the triode to limit its zero-bias plate current to a safe value.

These restrictions mean, in practice, that the receiver should have a separate-channel automatic-volume-control (avc) system. With such an avc system, the average amplitude of the signal voltage applied to the diode can be held within very close limits for all values of signal strength at the antenna.

The tube used in a diode-biased circuit should be one which operates at a fairly large value of bias voltage. The variations in bias voltage are then a small percentage of the total bias and hence produce small distortion. Tubes taking a fairly large bias voltage are types such as the 6BF6 or 6SR7 having a high- $\mu$  triode. Tube types having a high- $\mu$  triode or a pentode should not be used in a diode-biased circuit.

A grid-bias detector circuit is shown in Fig. 26. In this circuit, the grid is biased almost to cutoff, *i.e.*, operated so that the plate current with zero signal is practically zero. The bias voltage can be obtained from a cathode-bias resistor, a C-battery, or a bleeder tap. Because of the high negative bias, only the positive half-cycles of the rf signal are amplified by the tube. The signal is, therefore, detected in the

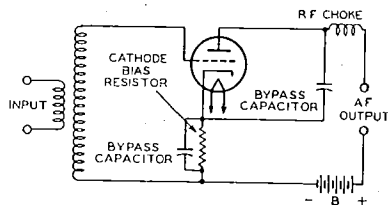


Fig. 26—Grid-bias detector circuit.

plate circuit. The advantages of this method of detection are that it amplifies the signal, besides detecting it, and that it does not draw current from the input circuit and therefore does not reduce the selectivity of the input circuit.

The **grid-resistor-and-capacitor method**, illustrated in Fig. 27, is somewhat more sensitive than the grid-bias method and gives its best results on weak signals. In this circuit, there is no negative dc bias voltage applied to the grid. Hence, on the positive half-cycles of the rf signal, current flows from grid to cathode. The grid and cathode thus act as a diode detector, with the grid resistor as the diode load resistor and the grid capacitor as the rf bypass capacitor. The voltage across the capacitor then reproduces the af modulation in the same manner as has been explained for the diode detector. This voltage appears between the grid and cathode and is therefore amplified in




Fig. 27—Detector circuit using grid-resistor-and-capacitor bias.

the plate circuit. The output voltage thus reproduces the original af signal.

In this detector circuit, the use of a high-resistance grid resistor increases selectivity and sensitivity. However, improved af response and stability are obtained with lower values of grid-circuit resistance. This detector circuit amplifies the signal, but draws current from the input circuit and therefore reduces the selectivity of the input circuit.

### FM Detection

The effect of **frequency modulation** on the waveform of the rf wave is shown in Fig. 28. In this type of transmission, the frequency of the rf wave deviates from a mean value, at an audio-frequency rate depending on the modu-

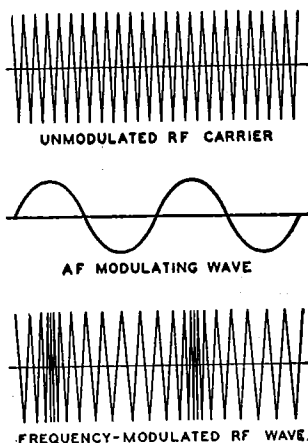


Fig. 28—Waveforms showing effect of frequency modulation on an rf wave.

lation, by an amount that is determined in the transmitter and is proportional to the amplitude of the af modulation signal.

For this type of modulation, a detector is required to discriminate between deviations above and below the mean frequency and to translate those deviations into a voltage whose amplitude varies at audio frequencies. Since the deviations occur at an audio frequency, the process is one of demodulation, and the degree of frequency deviation determines the amplitude of the demodulated (af) voltage.

A simple circuit for converting frequency variations to amplitude variations is a circuit which is tuned so that the mean radio frequency is on one slope of its resonance characteristic, as at A of Fig. 29. With modulation, the

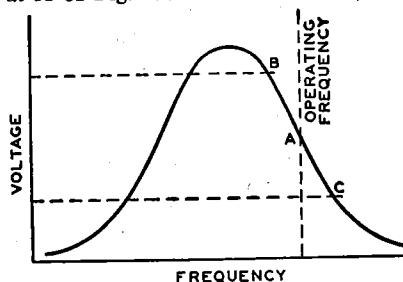


Fig. 29—Resonance curve of a tuned circuit showing desired operating range for frequency-modulation converter.

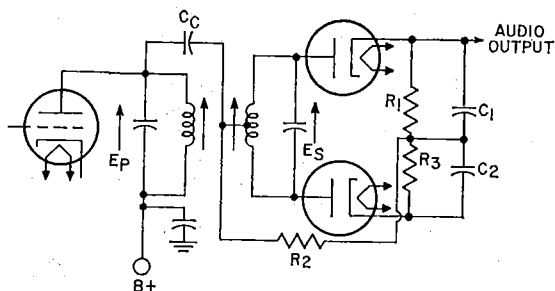


Fig. 30—Balanced phase-shift discriminator circuit.

frequency swings between B and C, and the voltage developed across the circuit varies at the modulating rate. In order that no distortion will be introduced in this circuit, the frequency swing must be restricted to the portion of the slope which is effectively straight. Since this portion is very short, the voltage developed is low. Because of these limitations, this circuit is not commonly used but it serves to illustrate the principle.

The faults of the simple circuit are overcome in a push-pull arrangement, such as that shown in Fig. 30, called a **balanced phase-shift discriminator**. In this detector, the mutually coupled tuned circuits in the primary and secondary windings of the transformer T are tuned to the center frequency. A characteristic of a double-tuned transformer is that the voltages in the primary and secondary windings are 90 degrees out of phase at resonance, and that the phase shift changes as the frequency changes from resonance. Therefore, the signal applied to the diodes and the RC combinations for peak detection also changes with frequency.

Because the secondary winding of the transformer T is center-tapped, the applied primary voltage  $E_p$  is added to one-half the secondary voltage  $E_s$  through the capacitor  $C_c$ . The addition of these voltages at resonance can be represented by the diagram in Fig. 31(a); the resultant voltage  $E_1$  is the signal applied to one peak-detector network consisting of one diode and its RC load. When the signal frequency decreases (from resonance), the phase shift of  $E_s/2$  becomes greater than 90 degrees, as shown at (b) in Fig. 31, and  $E_1$  becomes smaller. When the signal fre-

quency increases (above resonance), the phase shift of  $E_s/2$  is less than 90 degrees as shown at (c), and  $E_1$  becomes

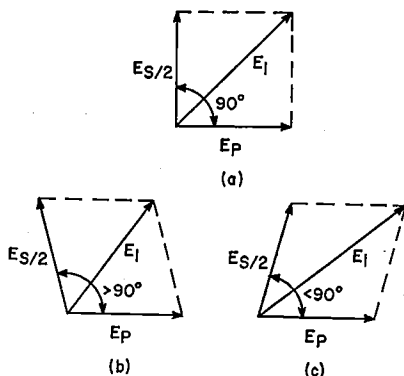


Fig. 31—Diagram illustrating phase shift in double-tuned transformer (a) at resonance, (b) below resonance, and (c) above resonance.

larger. The curve of  $E_1$  as a function of frequency in Fig. 32 is readily identified as the response curve of an FM detector.

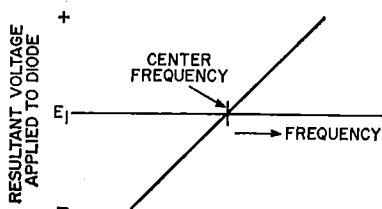


Fig. 32—Diagram showing resultant voltage  $E_1$  in Fig. 31 as a function of frequency.

Because the discriminator circuit shown in Fig. 30 uses a push-pull configuration, the diodes conduct on alternate half-cycles of the signal frequency and produce a plus-and-minus output with respect to zero rather than with

respect to  $E_s$ . The primary advantage of this arrangement is that there is no output at resonance. When an FM signal is applied to the input, the audio output voltage varies above and below zero as the instantaneous frequency varies above and below resonance. The frequency of this audio voltage is determined by the modulation frequency of the FM signal, and the amplitude of the voltage is proportional to the frequency excursion from resonance. (The resistor  $R_2$  in the circuit provides a dc return for the diodes, and also maintains a load impedance across the primary winding of the transformer.)

One disadvantage of the balanced phase-shift discriminator shown in Fig. 30 is that it detects audio modulation (AM) as well as frequency modulation (FM) in the if signal because the circuit is balanced only at the center frequency. At frequencies off resonance, any variation in amplitude of the if signal is reproduced to some extent in the audio output.

The **ratio-detector** circuit shown in Fig. 33 is a discriminator circuit which has the advantage of being relatively

placed "back-to-back" (in series, rather than in push-pull) so that both halves of the circuit operate simultaneously during one-half of the signal frequency cycle (and are cut off on the other half-cycle). As a result, the detected voltages  $E_1$  and  $E_2$  are in series, as shown for the instantaneous polarities that occur during the conduction half-cycle. When the audio output is taken between the equal capacitors  $C_1$  and  $C_2$ , therefore, the output voltage is equal to  $(E_2 - E_1)/2$  (for equal resistors  $R_1$  and  $R_2$ ).

The dc circuit of the ratio detector consists of a path through the secondary winding of the transformer, both diodes (which are in series), and resistors  $R_1$  and  $R_2$ . The value of the electrolytic capacitor  $C_3$  is selected so that the time constant of  $R_1$ ,  $R_2$ , and  $C_3$  is very long compared to the detected audio signal. As a result, the sum of the detected voltages ( $E_1 + E_2$ ) is a constant and the AM components on the signal frequency are suppressed. This feature of the ratio detector provides improved AM rejection as compared to the phase-shift discriminator circuit shown in Fig. 30.

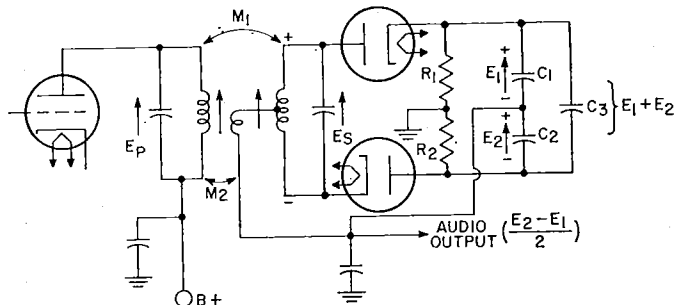


Fig. 33—Ratio-detector circuit.

insensitive to amplitude variations in the FM signal. In this circuit,  $E_p$  is added to  $E_s/2$  through the mutual coupling  $M_2$  (this voltage addition may be made by either mutual or capacitive coupling). Because of the phase-shift relationship of these voltages, the resultant detected signals vary with frequency variations in the same manner as described for the phase-shift discriminator circuit shown in Fig. 30. However, the diodes in the ratio detector are

## Amplification

The amplifying action of an electron tube was mentioned under **Triodes** in the section on **Electrons, Electrodes, and Electron Tubes**. This action can be utilized in electronic circuits in a number of ways, depending upon the results desired. Four classes of amplifier service recognized by engineers are covered by definitions standardized by the Institute of Electrical and

Electronics Engineers. This classification depends primarily on the fraction of input cycle during which plate current is expected to flow under rated full-load conditions. The classes are class A, class AB, class B, and class C. The term "cutoff bias" used in these definitions is the value of grid bias at which plate current is very small (i.e., approaches zero).

### Classes of Service

A **class A amplifier** is an amplifier in which the grid bias and alternating grid voltages are such that plate current in a specific tube flows at all times.

A **class AB amplifier** is an amplifier in which the grid bias and alternating grid voltages are such that plate current in a specific tube flows for appreciably more than half but less than the entire electrical cycle.

A **class B amplifier** is an amplifier in which the grid bias is approximately equal to the cutoff value, so that the plate current is approximately zero when no exciting grid voltage is applied, and so that plate current in a specific tube flows for approximately one-half of each cycle when an alternating grid voltage is applied.

A **class C amplifier** is an amplifier in which the grid bias is appreciably greater than the cutoff value, so that the plate current in each tube is zero when no alternating grid voltage is applied, and so that plate current flows in a specific tube for appreciably less than one-half of each cycle when an alternating grid voltage is applied.

The suffix 1 may be added to the letter or letters of the class identification to denote that grid current does not flow during any part of the input cycle. The suffix 2 may be used to denote that grid current flows during part of the cycle.

For radio-frequency (rf) amplifiers which operate into a selective tuned circuit, as in radio transmitter applications, or under requirements where distortion is not an important factor, any of the above classes of amplifiers may be used, either with a single tube or with a push-pull stage. For audio-frequency (af) amplifiers in which dis-

tortion is an important factor, only class A amplifiers permit single-tube operation. In this case, operating conditions are usually chosen so that distortion is kept below the conventional 5 per cent for triodes and the conventional 7 to 10 per cent for tetrodes or pentodes. Distortion can be reduced below these figures by means of special circuit arrangements such as that discussed under **inverse feedback**. With class A amplifiers, reduced distortion with improved power performance can be obtained by using a push-pull stage for audio service. With class AB and class B amplifiers, a balanced stage using two tubes is required for audio service.

### Class A Voltage Amplifiers

As a class A voltage amplifier, an electron tube is used to reproduce grid-voltage variations across an impedance or a resistance in the plate circuit. These variations are essentially of the same form as the input signal voltage impressed on the grid, but their amplitude is increased. This increase is accomplished by operation of the tube at a suitable grid bias so that the applied grid input voltage produces plate-current variations proportional to the signal swings. Because the voltage variation obtained in the plate circuit is much larger than that required to swing the grid, amplification of the signal is obtained.

Fig. 34 gives a graphical illustration of this method of amplification and shows, by means of the grid-voltage vs. plate-current characteristics curve, the effect of an input signal (S) applied to

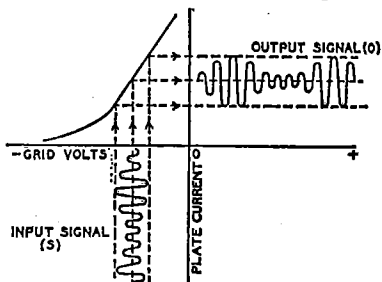


Fig. 34—Current characteristics of class A amplifier.

the grid of a tube. The output signal (O) is the resulting amplified plate-current variation.

The plate current flowing through the load resistance (R) of Fig. 35 causes a voltage drop which varies directly with the plate current. The ratio of this voltage variation produced in the load resistance to the input signal volt-




Fig. 35—Triode amplifier circuit.

age is the voltage amplification, or **gain**, provided by the tube. The voltage amplification due to the tube is expressed by the following convenient formulas:

$$\text{Voltage amplification} = \frac{\mu \times R_L}{R_L + r_p}$$

$$\text{or } \frac{g_m \times r_p \times R_L}{1000000 \times (r_p + R_L)}$$

where  $\mu$  is the amplification factor of the tube,  $R_L$  is the load resistance in ohms,  $r_p$  is the plate resistance in ohms, and  $g_m$  is the transconductance in micromhos.

From the first formula, it can be seen that the gain actually obtainable from the tube is less than the tube amplification factor, but that the gain approaches the amplification factor when the load resistance is large compared to the tube plate resistance. Fig. 36 shows graphically how the gain approaches the amplification factor of the tube as the load resistance is increased.

From the curve it can be seen that a high value of load resistance should be used to obtain high gain in a voltage amplifier.

In a **resistance-coupled amplifier**, the load resistance of the tube is approximately equal to the resistance of the plate resistor in parallel with the grid resistor of the following stage. Hence, to obtain a large value of load resistance, it is necessary to use a plate resistor and a grid resistor of large resistance. However, the plate resistor should not be too large because the flow of plate current through the plate resistor produces a voltage drop which reduces the plate voltage applied to the tube. If the plate resistor is too large, this drop will be too large, the plate voltage on the tube will be too small, and the voltage output of the tube will be too small. Also, the grid resistor of the following stage should not be too large, the actual maximum value being dependent on the particular tube type. This precaution is necessary because all tubes contain minute amounts of residual gas which cause a minute flow of current through the grid resistor. If the grid resistor is too large, the positive bias developed by the flow of this current through the resistor decreases the normal negative bias and produces an increase in the plate current. This increased current may overheat the tube and cause liberation of more gas which, in turn, will cause further decrease in bias. The action is cumulative and results in a runaway condition which can destroy the tube.

A higher value of grid resistance is permissible when cathode-resistor bias is used than when fixed bias is used.

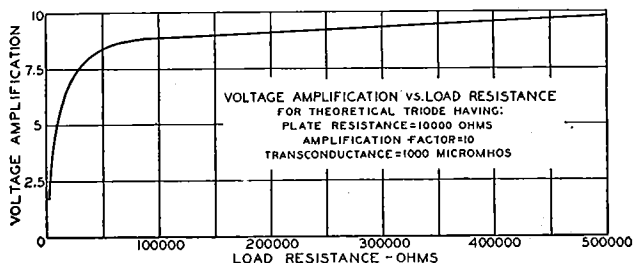


Fig. 36—Gain curve for triode amplifier circuit.



When cathode-resistor bias is used, a loss in bias due to gas or grid-emission effects is almost completely offset by an increase in bias due to the voltage drop across the cathode resistor. Typical values of plate resistor and grid resistor for tube types used in resistance-coupled circuits, and the values of gain obtainable, are shown in the **Resistance-Coupled Amplifier** section.

The **input impedance** of an electron tube (that is, the impedance between grid and cathode) consists of (1) a reactive component due to the capacitance between grid and cathode, (2) a resistive component resulting from the time of transit of electrons between cathode and grid, and (3) a resistive component developed by the part of the cathode lead inductance which is common to both the input and output circuits. These components are dependent on the frequency of the incoming signal. The input impedance is very high at audio frequencies when a tube is operated with its grid biased negative. In a class  $A_1$  or  $AB_1$  transformer-coupled audio amplifier, therefore, the loading imposed by the grid on the input transformer is negligible. As a result, the secondary impedance of a class  $A_1$  or class  $AB_1$  input transformer can be made very high because the choice is not limited by the input impedance of the tube; however, transformer design considerations may limit the choice.

At the higher radio frequencies, the input impedance may become very low even when the grid is negative, due to the finite time of passage of electrons between cathode and grid and to the appreciable lead reactance. This impedance drops very rapidly as the frequency is raised, and increases input-circuit loading. In fact, the input impedance may become low enough at very high radio frequencies to affect the gain and selectivity of a preceding stage appreciably. Tubes such as the "acorn" and "pencil" types and the high-frequency miniatures have been developed to have low input capacitances, low electron-transit time, and low lead inductance so that their input impedance is high even at the ultra-

high radio frequencies. **Input admittance** is the reciprocal of input impedance.

A **remote-cutoff amplifier** tube is a modified construction of a pentode or a tetrode type designed to reduce modulation-distortion and cross-modulation in radio-frequency stages. **Cross-modulation** is the effect produced in a radio or television receiver by an interfering station "riding through" on the carrier of the station to which the receiver is tuned. **Modulation-distortion** is a distortion of the modulated carrier and appears as audio-frequency distortion in the output. This effect is produced by a radio-frequency amplifier stage operating on an excessively curved characteristic when the grid bias has been increased to reduce volume. The offending stage for cross-modulation is usually the first radio-frequency amplifier, while for modulation-distortion the cause is usually the last intermediate-frequency stage. The characteristics of remote-cutoff types are such as to enable them to handle both large and small input signals with minimum distortion over a wide range of signal strength.

Fig. 37 illustrates the construction of the grid No. 1 (control grid) in a remote-cutoff tube. The remote-cutoff




Fig. 37—Structure of remote-cutoff grid.

action is due to the structure of the grid which provides a variation in amplification factor with change in grid bias. The grid No. 1 is wound with open spacing at the middle and with close spacing at the ends. When weak signals and low grid bias are applied to the tube, the effect of the non-uniform turn spacing of the grid on cathode emission and tube characteristics is essentially the same as for uniform spacing. As the

grid bias is made more negative to handle larger input signals, the electron flow from the sections of the cathode enclosed by the ends of the grid is cut off. The plate current and other tube characteristics are then dependent on the electron flow through the open section of the grid. This action changes the gain of the tube so that large signals may be handled with minimum distortion due to cross-modulation and modulation-distortion.

Fig. 38 shows a typical plate-current vs. grid-voltage curve for a remote-cutoff type compared with the curve




Fig. 38—Plate-current curves for triodes having remote-cutoff and uniformly spaced grids.

for a type having a uniformly spaced grid. It will be noted that while the curves are similar at small grid-bias voltages, the plate current of the remote-cutoff tube drops quite slowly with large values of bias voltage. This slow change makes it possible for the tube to handle large signals satisfactorily. Because remote-cutoff types can accommodate large and small signals, they are particularly suitable for use in sets having automatic volume control. Remote-cutoff tubes also are known as **variable- $\mu$**  types.

### Class A Power Amplifiers

As a class A power amplifier, an electron tube is used in the output stage of a radio or television receiver to supply a relatively large amount of power to the loudspeaker. For this application, large power output is of more importance than high voltage amplification; therefore, gain possibilities are sacrificed in the design of power tubes to obtain power-handling capability.

Triodes, pentodes, and beam power

tubes designed for power amplifier service have certain inherent features for each structure. Power tubes of the triode type for class A service are characterized by low power sensitivity, low plate-power efficiency, and low distortion. Power tubes of the pentode type are characterized by high power sensitivity, high plate-power efficiency and, usually, somewhat higher distortion than class A triodes. Beam power tubes have higher power sensitivity and efficiency than triode or conventional pentode types.

A class A power amplifier is also used as a driver to supply power to a class AB<sub>2</sub> or a class B stage. It is usually advisable to use a triode, rather than a pentode, in a driver stage because of the lower plate impedance of the triode.

Power tubes connected in either **parallel** or **push-pull** may be employed as class A amplifiers to obtain increased output. The parallel connection (Fig. 39) provides twice the output of a single tube with the same value of grid-signal voltage. With this connection, the effective transconductance of the stage is doubled, and the effective plate

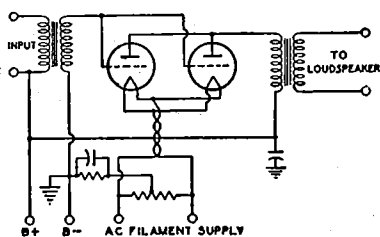


Fig. 39—Power amplifier with tubes connected in parallel.

resistance and the load resistance required are halved as compared with single-tube values.

The push-pull connection (Fig. 40), although it requires twice the grid-signal voltage, provides increased power and has other important advantages over single-tube operation. Distortion caused by even-order harmonics and hum caused by plate-voltage-supply fluctuations are either eliminated or decidedly reduced through cancellation.

Because distortion for push-pull operation is less than for single-tube operation, appreciably more than twice single-tube output can be obtained with triodes by decreasing the load resistance for the stage to a value approaching the load resistance for a single tube.

For either parallel or push-pull class A operation of two tubes, all electrode currents are doubled while all dc electrode voltages remain the same as for single-tube operation. If a cathode resistor is used, its value should be about one-half that for a single tube.

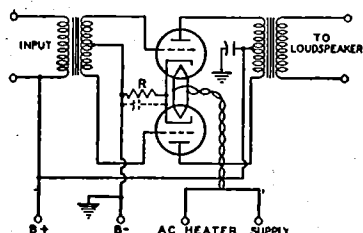


Fig. 40—Power amplifier with tubes connected in push-pull.

If oscillations occur with either type of connection, they can often be eliminated by the use of a non-inductive resistor of approximately 100 ohms connected in series with each grid at the socket terminal.

Operation of power tubes so that the grids run positive is inadvisable except under conditions such as those discussed in this section for class AB and class B amplifiers.

### Power-Output Calculations

Calculation of the power output of a triode used as a class A amplifier with either an output transformer or a choke having low dc resistance can be made

without serious error from the plate family of curves by assuming a resistance load. The proper plate current, grid bias, optimum load resistance, and per-cent second-harmonic distortion can also be determined. The calculations are made graphically and are illustrated in Fig. 41 for given conditions. The procedure is as follows:

(1) Locate the zero-signal bias point P by determining the zero-signal bias  $E_{c0}$  from the formula:

$$\text{Zero-signal bias } (E_{c0}) = -(0.68 \times E_b) / \mu$$

where  $E_b$  is the chosen value in volts of dc plate voltage at which the tube is to be operated, and  $\mu$  is the amplification factor of the tube. This quantity is shown as negative to indicate that a negative bias is used.

(2) Locate the value of zero-signal plate current,  $I_0$ , corresponding to point P.

(3) Locate the point  $2I_0$ , which is twice the value of  $I_0$  and corresponds to the value of the maximum-signal plate current  $I_{max}$ .

(4) Locate the point X on the dc bias curve at zero volts,  $E_c = 0$ , corresponding to the value of  $I_{max}$ .

(5) Draw a straight line XY through X and P.

Line XY is known as the load resistance line. Its slope corresponds to the value of the load resistance. The load resistance in ohms is equal to  $(E_{max} - E_{min})$  divided by  $(I_{max} - I_{min})$ , where E is in volts and I is in amperes.

It should be noted that in the case of filament types of tubes, the calculations are given on the basis of a dc-operated filament. When the filament is ac-operated, the calculated value of dc

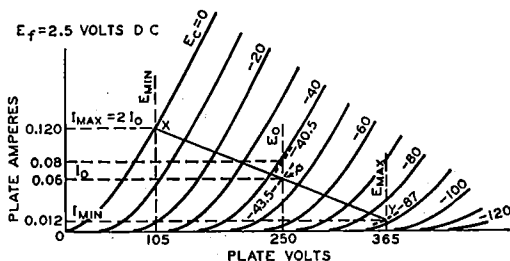


Fig. 41—Graphic calculations for class A amplifier using a power triode.

bias should be increased by approximately one-half the filament voltage rating of the tube.

The value of zero-signal plate current  $I_0$  should be used to determine the plate dissipation, an important factor influencing tube life. In a class A amplifier under zero-signal conditions, the plate dissipation is equal to the power input, *i.e.*, the product of the dc plate voltage  $E_0$  and the zero-signal dc plate current  $I_0$ . If it is found that the plate-dissipation rating of the tube is exceeded with the zero-signal bias  $E_0$  calculated above, it will be necessary to increase the bias by a sufficient amount so that the actual plate dissipation does not exceed the rating before proceeding further with the remaining calculations.

For power-output calculations, it is assumed that the peak alternating grid voltage is sufficient (1) to swing the grid from the zero-signal bias value  $E_0$  to zero bias ( $E_0 = 0$ ) on the positive swing and (2) to swing the grid to a value twice the zero-signal bias value on the negative swing. During the negative swing, the plate voltage and plate current reach values of  $E_{max}$  and  $I_{min}$ ; during the positive swing, they reach values of  $E_{min}$  and  $I_{max}$ . Because power is the product of voltage and current, the power output  $P_0$  as shown by a watt-meter is given by

$$P_0 = \frac{(I_{max} - I_{min}) \times (E_{max} - E_{min})}{8}$$

where  $E$  is in volts,  $I$  is in amperes, and  $P_0$  is in watts.

In the output of power-amplifier triodes, some distortion is present. This distortion is due predominantly to second harmonics in single-tube amplifiers. The percentage of second-harmonic distortion may be calculated by the following formula:

$$\% \text{ distortion} = \frac{I_{max} + I_{min} - I_0}{I_{max} - I_{min}} \times 100$$

where  $I_0$  is the zero-signal plate current in amperes. If the distortion is excessive, the load resistance should be increased or, occasionally, decreased slightly and the calculations repeated.

**Example:** Determine the load resistance, power output, and distortion

of a triode having an amplification factor of 4.2, a plate-dissipation rating of 15 watts, and plate-characteristics curves as shown in Fig. 41. The tube is to be operated at 250 volts on the plate.

**Procedure:** For a first approximation, determine the operating point  $P$  from the zero-signal bias formula,  $E_0 = -(0.68 \times 250) / 4.2 = -40.5$  volts. From the curve for this voltage, it is found that the zero-signal plate current is 0.08 ampere and, therefore, the plate-dissipation rating is exceeded ( $0.08 \times 250 = 20$  watts). Consequently, it is necessary to reduce the zero-signal plate current to 0.06 ampere at 250 volts. The grid bias is then  $-43.5$  volts. Note that the curve was taken with a dc filament supply; if the filament is to be operated on an ac supply, the bias must be increased by about one-half the filament voltage, or to  $-45$  volts, and the circuit returns made to the mid-point of the filament circuit.

Point  $X$  can then be determined. Point  $X$  is at the intersection of the dc bias curve at zero volts with  $I_{max}$ , where  $I_{max} = 2I_0 = 2 \times 0.06 = 0.12$  ampere. Line  $XY$  is drawn through points  $P$  and  $X$ .  $E_{max}$ ,  $E_{min}$ , and  $I_{min}$  are then found from the curves. When these values are substituted in the power-output formula, the following result is obtained:

$$P_0 = \frac{(0.12 - 0.012) \times (365 - 105)}{8} = 3.52 \text{ watts}$$

The resistance represented by load line  $XY$  is

$$\frac{(365 - 105)}{(0.12 - 0.012)} = 2410 \text{ ohms}$$

When the values from the curves are substituted in the distortion formula, the following result is obtained:

$$\% \text{ distortion} = \frac{0.12 + 0.012}{2} - 0.06 \times 100 = 5.5\%$$

It is customary to select the load resistance so that the distortion does not exceed five per cent. When the method shown is used to determine the slope of the load-resistance line, the second-harmonic distortion generally does not exceed five per cent. In the example, however, the distortion is excessive and it is desirable, therefore, to use a slightly higher load resistance. A load resistance

of 2500 ohms will provide a distortion of about 4.9 per cent. The power output is reduced only slightly to 3.5 watts.

Operating conditions for **triodes in push-pull** depend on the type of operation desired. Under class A conditions, distortion, power output, and efficiency are all relatively low. The operating bias can be anywhere between that specified for single-tube operation and that equal to one-half the grid-bias voltage required to produce plate-current cutoff at a plate voltage of  $1.4E_0$ , where  $E_0$  is the operating plate voltage. Higher bias than this value requires higher grid-signal voltage and results in class AB<sub>1</sub> operation, which is discussed later.

The method for calculating maximum power output for **triodes in push-pull class A operation** is as follows: Erect a vertical line at  $0.6 E_0$  (see Fig. 42), intersecting the  $E_c = 0$  curve at the point  $I_{max}$ . Then,  $I_{max}$  is determined from the curve for use in the formula

$$P_o = (I_{max} \times E_0)/5$$

If  $I_{max}$  is expressed in amperes and  $E_0$  in volts, power output is in watts.

**Example:** Assume that the plate voltage ( $E_0$ ) is to be 300 volts, and the plate-dissipation rating of the tube is 15 watts. Then, for class A operation, the operating bias can be equal to, but not more than, one-half the grid bias for cutoff with a plate voltage of  $1.4 \times 300 = 420$  volts. (Since cutoff bias is approximately  $-115$  volts at a plate voltage of 420 volts, one-half of this value is  $-57.5$  volts bias.) At this bias, the plate current is found from the plate family to be 0.054 ampere and, therefore, the plate dissipation is  $0.054 \times 300$  or 16.2 watts. Since  $-57.5$  volts is the limit of bias for class A operation of these tubes at a plate voltage of 300 volts, the dissipation cannot be reduced by increasing the bias and it becomes necessary to reduce the plate voltage.

If the plate voltage is reduced to 250 volts, the bias will be found to be  $-43.5$  volts. For this value, the plate current is 0.06 ampere, and the plate dissipation is 15 watts. Then, following the method for calculating power output, erect a vertical line at  $0.6E_0 = 150$

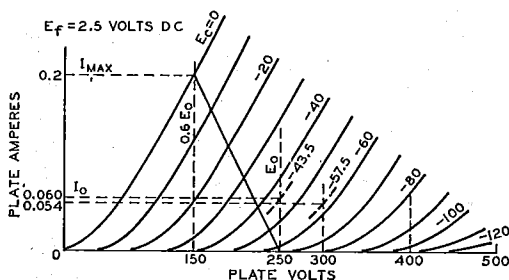


Fig. 42—Graphic calculations for push-pull class A amplifier using a power triode.

The method for determining the proper load resistance for triodes in push-pull is as follows: Draw a load line through  $I_{max}$  on the zero-bias curve and through the  $E_0$  point on the zero-current axis. Four times the resistance represented by this load line is the plate-to-plate load ( $R_{pp}$ ) for two triodes in a class A push-pull amplifier. Expressed as a formula,

$$R_{pp} = 4 \times (E_0 - 0.6E_0)/I_{max}$$

where  $E_0$  is expressed in volts,  $I_{max}$  in amperes, and  $R_{pp}$  in ohms.

The intersection of the line with the curve  $E_c = 0$  is  $I_{max}$  or 0.2 ampere. When this value is substituted in the power formula, the power output is  $(0.2 \times 250)/5 = 10$  watts. The load resistance is determined from the load formula: Plate-to-plate load ( $R_{pp}$ ) =  $4 \times (250 - 150)/0.2 = 2000$  ohms.

**Power output for a pentode or a beam power tube as a class A amplifier** can be calculated in much the same way as for triodes. Calculations can be made graphically from a special plate family of curves, as shown in Fig. 43.

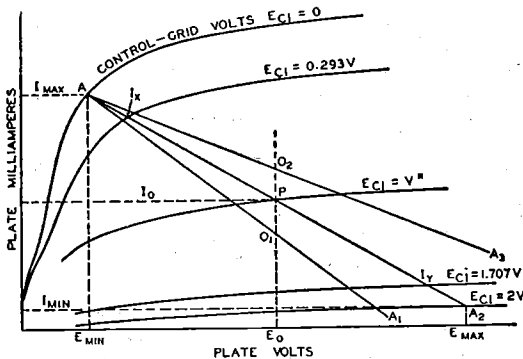


Fig. 43—Graphic calculations for class A amplifier using a pentode or beam power tube.

From a point A at or just below the knee of the zero-bias curve, draw arbitrarily selected load lines to intersect the zero-plate-current axis. These lines should be on both sides of the operating point P, whose position is determined by the desired operating plate voltage,  $E_o$ , and one-half the maximum-signal plate current. Along any load line, say  $AA_1$ , measure the distance  $AO_1$ . On the same line, lay off an equal distance,  $O_1A_1$ . For optimum operation, the change in bias from A to  $O_1$  should be nearly equal to the change in bias from  $O_1$  to  $A_1$ . If this condition can not be met with one line, as is the case for the line first chosen, then another should be chosen. When the most satisfactory line has been selected, its resistance may be determined by the following formula:

$$\text{Load resistance } (R_L) = \frac{E_{\max} - E_{\min}}{I_{\max} - I_{\min}}$$

The value of  $R_L$  may then be substituted in the following formula for calculating power output.

$$P_o = \frac{[I_{\max} - I_{\min} + 1.41 (I_x - I_y)]^2 R_L}{32}$$

In both of these formulas,  $I$  is in amperes,  $E$  is in volts,  $R_L$  is in ohms, and  $P_o$  is in watts.  $I_x$  and  $I_y$  are the current values on the load line at bias voltages of  $E_{c1} = V - 0.707V = 0.293V$  and  $E_{c1} = V + 0.707V = 1.707V$ , respectively.

Calculations for distortion may be made by means of the following formu-

las. The terms used have already been defined.

$$\% \text{ 2nd-harmonic distortion} = \frac{I_{\max} + I_{\min} - 2 I_o}{I_{\max} - I_{\min} + 1.41 (I_x - I_y)} \times 100$$

$$\% \text{ 3rd-harmonic distortion} = \frac{I_{\max} - I_{\min} - 1.41 (I_x - I_y)}{I_{\max} - I_{\min} + 1.41 (I_x - I_y)} \times 100$$

$$\% \text{ total (2nd and 3rd) harmonic distortion} = \frac{\sqrt{(\% \text{ 2nd})^2 + (\% \text{ 3rd})^2}}{1}$$

### Conversion Factors

Operating conditions for voltage values other than those shown in the published data can be obtained by use of the **nomograph** shown in Fig. 44 when all electrode voltages are changed simultaneously in the same ratio. The nomograph includes conversion factors for current ( $F_i$ ), power output ( $F_p$ ), plate resistance or load resistance ( $F_r$ ), and transconductance ( $F_{gm}$ ) for voltage ratios between 0.5 and 2.0. These factors are expressed as functions of the ratio between the desired or new voltage for any electrode ( $E_{des}$ ) and the published or original value of that voltage ( $E_{pub}$ ). The relations shown are applicable to triodes and multigrid tubes in all classes of service.

To use the nomograph, simply place a straight-edge across the page so that it intersects the scales for  $E_{des}$  and  $E_{pub}$  at the desired values. The desired conversion factor may then be read directly or estimated at the point where the straight-edge intersects the  $F_i$ ,  $F_p$ ,  $F_r$ , or  $F_{gm}$  scale.

For example, suppose it is desired to operate two 6L6GC's in class A<sub>1</sub> push-pull, fixed bias, with a plate voltage of 200 volts. The nearest published operating conditions for this class of service are for a plate voltage of 250 volts. The operating conditions for the new plate voltage can be determined as follows:

The voltage conversion factor,  $F_e$ , is equal to 200/250 or 0.8. The dashed lines on the nomograph of Fig. 44 indicate that for this voltage ratio  $F_r$  is approximately 0.72,  $F_p$  is approximately 0.57,  $F_r$  is 1.12, and  $F_{gm}$  is approximately 0.892. These factors may be applied directly to operating values shown in the tube data, or to values calculated by the methods described previously.

Because this method for conversion

of characteristics is necessarily an approximation, the accuracy of the nomograph decreases progressively as the ratio  $E_{des}/E_{pub}$  departs from unity. In general, results are substantially correct when the value of the ratio  $E_{des}/E_{pub}$  is between 0.7 and 1.5. Beyond these limits, the accuracy decreases rapidly, and the results obtained must be considered rough approximations.

The nomograph does not take into consideration the effects of contact potential or secondary emission in tubes. Because contact-potential effects become noticeable only at very small dc grid-No. 1 (bias) voltages, they are generally negligible in power tubes. Secondary emission may occur in conventional tetrodes, however, if the plate voltage swings below the grid-No. 2 voltage. Consequently, the conversion

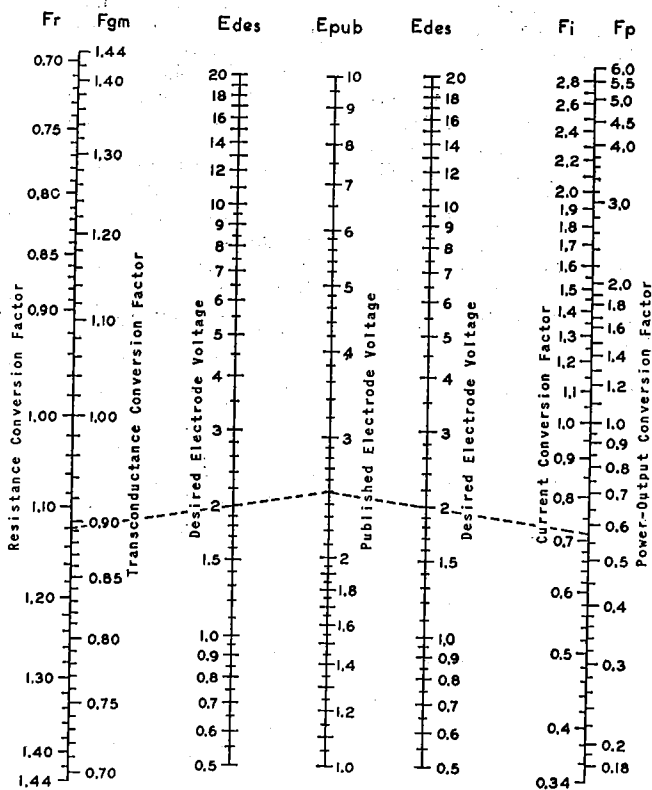


Fig. 44—Nomograph of tube conversion factors.

factors shown in the nomograph apply to such tubes only when the plate voltage is greater than the grid-No. 2 voltage. Because secondary emission may also occur in certain beam power tubes at very low values of plate current and plate voltage, the conversion factors shown in the nomograph do not apply when these tubes are operated under such conditions.

### Class AB Power Amplifiers

A class AB power amplifier employs two tubes connected in push-pull with a higher negative grid bias than is used in a class A stage. With this higher negative bias, the plate and screen-grid voltages can usually be made higher than for class A amplifiers because the increased negative bias holds plate current within the limit of the tube plate-dissipation rating. As a result of these higher voltages, more power output can be obtained from class AB operation.

Class AB amplifiers are subdivided into class AB<sub>1</sub> and class AB<sub>2</sub>. In class AB<sub>1</sub>, there is no flow of grid current. That is, the peak signal voltage applied to each grid is not greater than the negative grid-bias voltage. The grids therefore are not driven to a positive potential and do not draw current. In class AB<sub>2</sub>, the peak signal voltage is greater than the bias so that the grids are driven positive and draw current.

Because of the flow of grid current in a class AB<sub>2</sub> stage, there is a loss of power in the grid circuit. The sum of this loss and the loss in the input transformer is the total driving power required by the grid circuit. The driver stage should be capable of a power output considerably larger than this required power in order that distortion introduced in the grid circuit be kept low. The input transformer used in a class AB<sub>2</sub> amplifier usually has a step-down turns ratio.

Because of the large fluctuations of plate current in a class AB<sub>2</sub> stage, it is important that the plate power supply have good regulation. Otherwise the fluctuations in plate current cause fluctuations in the voltage output of the power supply, with the result that power output is decreased and distortion is increased. To obtain satisfactory regulation, it is usually advisable to use a low-drop rectifier, such as the 5V4GA, with a choke-input filter. In all cases, the resistance of the choke and transformers should be as low as possible.

### Class AB<sub>1</sub> Power Amplifiers

In class AB<sub>1</sub> push-pull amplifier service using triodes, the operating conditions may be determined graphically by means of the plate family if  $E_o$ , the desired operating plate voltage, is given. In this service, the dynamic load line does not pass through the operating point P as in the case of the single-tube amplifier, but through the point D in Fig. 45. Its position is not affected by the operating grid bias provided the plate-to-plate load resistance remains constant.

Under these conditions, grid bias has no appreciable effect on the power

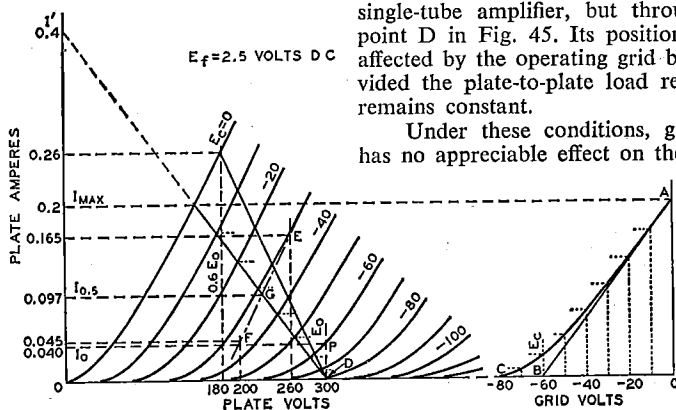


Fig. 45—Graphic calculations for class AB<sub>1</sub> amplifier using a power triode.

Fig. 46—Instantaneous curve for class AB<sub>1</sub> amplifier.



output. Grid bias cannot be neglected, however, since it is used to find the zero-signal plate current and, from it, the zero-signal plate dissipation. Because the grid bias is higher in class AB<sub>1</sub> than in class A service for the same plate voltage, a higher signal voltage may be used without grid current being drawn and, therefore, higher power output is obtained.

In general, for any load line through point D, Fig. 45, the plate-to-plate load resistance in ohms of a push-pull amplifier is  $R_{pp} = 4E_o/I'$ , where  $I'$  is the plate-current value in amperes at which the load line as projected intersects the plate-current axis, and  $E_o$  is in volts. This formula is another form of the one given under push-pull class A amplifiers,  $R_{pp} = 4(E_o - 0.6E_o)/I_{max}$ , but is more general. Power output =  $(I_{max}/\sqrt{2})^2 \times R_{pp}/4$ , where  $I_{max}$  is the peak plate current at zero grid volts for the load chosen. This formula simplified is  $(I_{max})^2 \times R_{pp}/8$ . The maximum-signal average plate current is  $2I_{max}/\pi$  or  $0.636 I_{max}$ ; the maximum-signal average power input is  $0.636 I_{max} \times E_o$ .

It is desirable to simplify these formulas for a first approximation. This simplification can be made if it is assumed that the peak plate current,  $I_{max}$ , occurs at the point of the zero-bias curve corresponding approximately to  $0.6 E_o$ , the condition for maximum power output. The simplified formulas are:

$$P_o \text{ (for two tubes)} = (I_{max} \times E_o)/5$$

$$R_{pp} = 1.6E_o/I_{max}$$

where  $E_o$  is in volts,  $I_{max}$  is in amperes,  $R_{pp}$  is in ohms, and  $P_o$  is in watts.

It may be found during subsequent calculations that the distortion or the plate dissipation is excessive for this approximation; in that case, a different load resistance must be selected, using the first approximation as a guide, and the process repeated to obtain satisfactory operating conditions.

**Example:** Fig. 45 illustrates the application of this method to a pair of power triodes operated at  $E_o = 300$  volts. Each tube has a plate-dissipation rating of 15 watts. The method is to

erect a vertical line at  $0.6E_o$ , or at 180 volts, which intersects the  $E_c = 0$  curve at the point  $I_{max} = 0.26$  ampere. Using the simplified formulas, the following values are obtained:

$$R_{pp} = (1.6 \times 300)/0.26 = 1845 \text{ ohms}$$

$$P_o = (0.26 \times 300)/5 = 15.6 \text{ watts}$$

At this point, it is well to determine the plate dissipation and to compare it with the maximum rated value. From the average-plate-current formula ( $0.636 I_{max}$ ) mentioned previously, the maximum-signal average plate current is 0.166 ampere. The product of this current and the operating plate voltage is 49.8 watts, the average input to the two tubes. From this value, subtract the power output of 15.6 watts to obtain the total dissipation for both tubes, which is 34.2 watts. Half of this value, 17 watts, is in excess of the 15-watt rating of the tube and it is necessary, therefore, to assume another and higher load resistance so that the plate-dissipation rating will not be exceeded.

It will be found that at an operating plate voltage of 300 volts the tubes require a plate-to-plate load resistance of 3000 ohms. From the formula for  $R_{pp}$ , the value of  $I'$  is found to be 0.4 ampere. The load line for the 3000-ohm load resistance is then represented by a straight line from the point  $I' = 0.4$  ampere on the plate-current ordinate to the point  $E_o = 300$  volts on the plate-voltage abscissa. At the intersection of the load line with the zero-bias curve, the peak plate current,  $I_{max}$ , can be read at 0.2 ampere. Then

$$P_o = (I_{max}/\sqrt{2})^2 \times R_{pp}/4$$

$$= (0.2/1.41)^2 \times 3000/4$$

$$= 15 \text{ watts}$$

Proceeding as in the first approximation, it is found that the maximum-signal average plate current,  $0.636I_{max}$ , is 0.127 ampere, and the maximum-signal average power input is 38.1 watts. This input minus the power output is  $38.1 - 15 = 23.1$  watts. This value is the dissipation for two tubes; the value per tube is 11.6 watts, a value well within the rating of this tube type.

The operating bias and the zero-signal plate current may then be found by use of a curve which is derived from

the plate family and the load line. Fig. 46 is a curve of instantaneous values of plate current and dc grid-bias voltages taken from Fig. 45. Values of grid bias are read from each of the grid-bias curves of Fig. 45 along the load line and are transferred to Fig. 46 to produce the curved line from A to C. A tangent to this curve, starting at A, is drawn to intersect the grid-voltage abscissa. The point of intersection, B, is the operating grid bias for fixed-bias operation. In the example, the bias is  $-60$  volts. Refer back to the plate family at the operating conditions of plate volts = 300 and grid bias =  $-60$  volts; the zero-signal plate current per tube is seen to be 0.04 ampere.

This procedure locates the operating point for each tube at P. The plate current must be doubled, of course, to obtain the zero-signal plate current for both tubes. Under maximum-signal conditions, the signal voltage swings from zero-signal bias voltage to zero bias for each tube on alternate half cycles. Hence, in the example, the peak of signal voltage per tube is 60 volts, or the grid-to-grid value is 120 volts.

As in the case of the push-pull class A amplifier, the second-harmonic distortion in a class AB<sub>1</sub> amplifier using triodes is very small and is largely canceled by virtue of the push-pull connection. Third-harmonic distortion, however, which may be larger than permissible, can be found by means of composite characteristic curves. A complete family of curves can be plotted, but for the present purpose only the one corresponding to a grid bias of one-half the peak grid-voltage swing is needed. In the example, the peak grid voltage per tube is 60 volts, and the half value is 30 volts. The composite curve, since it is nearly a straight line, can be constructed with only two points (see Fig. 45). These two points are obtained from deviations above and below the operating grid and plate voltages.

In order to find the curve for a bias of  $-30$  volts, a deviation of 30 volts from the operating grid voltage of  $-60$  volts is assumed. Next assume a deviation from the operating plate voltage of, say, 40 volts. Then at 300

$-40 = 260$  volts, erect a vertical line to intersect the  $(-60) - (-30) = -30$ -volt bias curve and read the plate current at this intersection, which is 0.167 ampere; likewise, at the intersection of a vertical line at  $300 + 40 = 340$  volts and the  $(-60) + (-30) = -90$ -volt bias curve, read the plate current. In this example, the plate current is estimated to be 0.002 ampere. The difference of 0.165 ampere between these two currents determines the point E on the  $300 - 40 = 260$ -volt vertical. Similarly, another point F on the same composite curve is found by assuming the same grid-bias deviation but a larger plate-voltage deviation, say, 100 volts.

These steps provide points at 260 volts and 0.165 ampere (E), and at 200 volts and 0.045 ampere (F). A straight line through these points is the composite curve for a bias of  $-30$  volts, shown as a long-short dash line in Fig. 45. At the intersection of the composite curve and the load line, G, the instantaneous composite plate current at the point of one-half the peak signal swing is determined. This current value, designated  $I_{0.5}$  and the peak plate current,  $I_{max}$ , are used in the following formula to find the peak value of the third-harmonic component of plate current.

$$I_{h3} = (2I_{0.5} - I_{max})/3$$

In the example, where  $I_{0.5}$  is 0.097 ampere and  $I_{max}$  is 0.2 ampere,  $I_{h3} = (2 \times 0.097 - 0.2)/3 = (0.194 - 0.2)/3 = -0.006/3 = -0.002$  ampere. (The fact that  $I_{h3}$  is negative indicates that the phase relation of the fundamental (first-harmonic) and third-harmonic components of the plate current is such as to result in a slightly peaked wave form.  $I_{h3}$  is positive in some cases, indicating a flattening of the wave form.)

The peak value of the fundamental or first-harmonic component of the plate current is found by the following formula:

$$I_{h1} = 2/3 \times (I_{max} + I_{0.5})$$

In the example,  $I_{h1} = 2/3 \times (0.2 + 0.097) = 0.198$  ampere. Thus, the percentage of third-harmonic distortion is  $(I_{h3}/I_{h1}) \times 100 = (0.002/0.198) \times 100 = 1$  per cent approx.

### *Class AB<sub>2</sub> Power Amplifiers*

A class AB<sub>2</sub> amplifier employs two tubes connected in push-pull as in the case of class AB<sub>1</sub> amplifiers. It differs in that it is biased so that plate current flows for somewhat more than half the electrical cycle but less than the full cycle, the peak signal voltage is greater than the dc bias voltage, grid current is drawn, and, consequently, power is consumed in the grid circuit. These conditions permit high power output to be obtained without excessive plate dissipation.

The sum of the power used in the grid circuit and the losses in the input transformer is the total driving power required by the grid circuit. The driver stage should be capable of a power output considerably larger than this required power in order that distortion introduced in the grid circuit be kept low. In addition, the internal impedance of the driver stage as reflected into or as effective in the grid circuit of the power stage should always be as low as possible in order that distortion may be kept low. The input transformer used in a class AB<sub>2</sub> stage usually has a step-down ratio adjusted for this condition.

Load resistance, plate dissipation, power output, and distortion determinations are similar to those for class AB<sub>1</sub>. These quantities are interdependent with peak grid-voltage swing and driving power; a satisfactory set of operating conditions involves a series of approximations. The load resistance and signal swing are limited by the permissible grid current and power and the distortion. If the load resistance is too high or the signal swing is excessive, the plate-dissipation rating will be exceeded, distortion will be high, and the driving power will be unnecessarily high.

### *Class B Power Amplifiers*

A class B amplifier employs two tubes connected in push-pull, so biased that plate current is almost zero when no signal voltage is applied to the grids. Because of this low value of no-signal plate current, class B amplification has the same advantage as class AB<sub>2</sub>, *i.e.*, large power output can be obtained without excessive plate dissipation.

Class B operation differs from class AB<sub>2</sub> in that plate current is cut off for a larger portion of the negative grid swing, and the signal swing is usually larger than in class AB<sub>2</sub> operation.

Because certain triodes used as class B amplifiers are designed to operate very close to zero bias, the grid of each tube is at a positive potential during all or most of the positive half-cycle of its signal swing. In this type of triode operation, considerable grid current is drawn and there is a loss of power in the grid circuit. This condition imposes the same requirement in the driver stage as in a class AB<sub>2</sub> stage; *i.e.*, the driver should be capable of delivering considerably more power output than the power required for the grid circuit of the class B amplifier so that distortion will be low. Similarly, the interstage transformer between the driver and the class B stage usually has a step-down turns ratio. Because of the high dissipations involved in class B operation at zero bias, it is not feasible to use tetrodes or pentodes in this type of class B operation.

Determination of load resistance, plate dissipation, power output, and distortion is similar to that for a class AB<sub>2</sub> stage.

Power amplifier tubes designed for class A operation can be used in class AB<sub>2</sub> and class B service under suitable operating conditions. There are several tube types designed especially for class B service. The characteristic common to all of these types is a high amplification factor. With a high amplification factor, plate current is small even when the grid bias is zero. These tubes, therefore, can be operated in class B service at a bias of zero volts so that no bias supply is required. A number of class B amplifier tubes consist of two triode units mounted in one tube. The two units can be connected in push-pull so that only one tube is required for a class B stage.

### *Cathode-Drive Circuits*

The preceding text has discussed the use of tubes in the conventional grid-drive type of amplifier—that is,

where the cathode is common to both the input and output circuits. Tubes may also be employed as amplifiers in circuit arrangements which utilize the grid or plate as the common terminal. Probably the most important of these amplifiers are the cathode-drive circuit, which is discussed below, and the cathode-follower circuit, which will be discussed later in connection with inverse feedback.

A typical cathode-drive circuit is shown in Fig. 47. The load is placed in

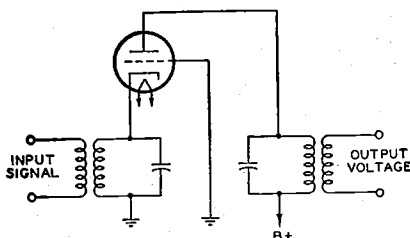


Fig. 47—Cathode-drive circuit.

the plate circuit and the output voltage is taken off between the plate and ground as in the grid-drive method of operation. The grid is grounded, and the input voltage is applied across an appropriate impedance in the cathode circuit. The cathode-drive circuit is particularly useful for vhf and uhf applications, in which it is necessary to obtain the low-noise performance usually associated with a triode, but where a conventional grid-drive circuit would be unstable because of feedback through the grid-to-plate capacitance of the tube. In the cathode-drive circuit, the grounded grid serves as a capacitive shield between plate and cathode and permits stable operation at frequencies higher than those in which conventional circuits can be used.

The input impedance of a cathode-drive circuit is approximately equal to  $1/g_m$  when the load resistance is small compared to the  $r_p$  of the tube. A certain amount of power is required, therefore, to drive such a circuit. However, in the type of service in which cathode-drive circuits are normally used, the advantages of the grounded-grid connection usually outweigh this disadvantage.

### Inverse Feedback

An inverse-feedback circuit, sometimes called a **degenerative** circuit, is one in which a portion of the output voltage of a tube is applied to the input of the same or a preceding tube in opposite phase to the signal applied to the tube. Two important advantages of feedback are (1) reduced distortion from each stage included in the feedback circuit and (2) reduction in the variations in gain due to changes in line voltage, possible differences between tubes of the same type, or variations in the values of circuit constants included in the feedback circuit.

Inverse feedback is used in audio amplifiers to reduce distortion in the output stage where the load impedance on the tube is a loudspeaker. Because the impedance of a loudspeaker is not constant for all audio frequencies, the load impedance on the output tube varies with frequency. When the output tube is a pentode or beam power tube having high plate resistance, this variation in plate load impedance can, if not corrected, produce considerable frequency distortion. Such frequency distortion can be reduced by means of inverse feedback. Inverse-feedback circuits are of the **constant-voltage** type and the **constant-current** type.

The application of the **constant-voltage** type of inverse feedback to a power-output stage using a single beam power tube is illustrated in Fig. 48. In this circuit,  $R_1$ ,  $R_2$ , and  $C$  are connected as a voltage divider across the output of the tube. The secondary winding of the grid-input transformer is returned to a point on this voltage divider. Capacitor

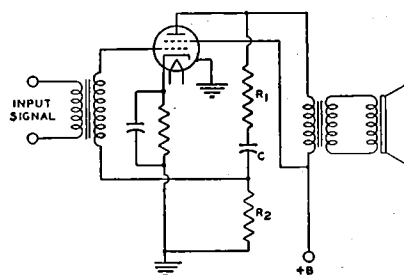


Fig. 48—Power-output stage using constant voltage inverse feedback.

C blocks the dc plate voltage from the grid. However, a portion of the tube af output voltage, approximately equal to the output voltage multiplied by the fraction  $R_2/(R_1 + R_2)$ , is applied to the grid. This voltage reduces the source impedance of the circuit and a decrease in distortion results which is explained in the curves of Fig. 49.

ment of plate current  $i'_{pt}$ . It is evident that the irregularity of the waveform of this component of plate current would act to cancel the original irregularity and thus reduce distortion.

After inverse feedback has been applied, the relations are as shown in the curve for  $i_p$ . The dotted curve shown by  $i'_{pt}$  is the component of plate current

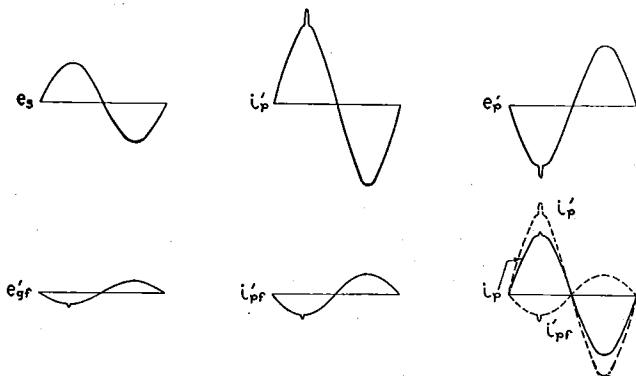


Fig. 49—Voltage and current waveforms showing effect of inverse feedback.

Consider first the amplifier without the use of inverse feedback. Suppose that when a signal voltage  $e_s$  is applied to the grid the af plate current  $i'_p$  has an irregularity in its positive half-cycle. This irregularity represents a departure from the waveform of the input signal and is, therefore, distortion. For this plate-current waveform, the af plate voltage has a waveform shown by  $e'_p$ . The plate-voltage waveform is inverted compared to the plate-current waveform because a plate-current increase produces an increase in the drop across the plate load. The voltage at the plate is the difference between the drop across the load and the supply voltage; thus, when plate current goes up, plate voltage goes down; when plate current goes down, plate voltage goes up.

Now suppose that inverse feedback is applied to the amplifier. The voltage fed back to the grid has the same waveform and phase as the plate voltage, but is smaller in magnitude. Hence, with a plate voltage of waveform shown by  $e'_p$ , the feedback voltage appearing on the grid is as shown by  $e'_{gr}$ . This voltage applied to the grid produces a compo-

due to the feedback voltage on the grid. The dotted curve shown by  $i'_p$  is the component of plate current due to the signal voltage on the grid. The algebraic sum of these two components gives the resultant plate current shown by the solid curve of  $i_p$ . Since  $i'_p$  is the plate current that would flow without inverse feedback, it can be seen that the application of inverse feedback has reduced the irregularity in the output current. In this manner inverse feedback acts to correct any component of plate current that does not correspond to the input signal voltage, and thus reduces distortion.

From the curve for  $i_p$ , it can be seen that, besides reducing distortion, inverse feedback also reduces the amplitude of the output current. Consequently, when inverse feedback is applied to an amplifier there is a decrease in gain or power sensitivity as well as a decrease in distortion. Hence, the application of inverse feedback to an amplifier requires that more driving voltage be applied to obtain full power output, but this output is obtained with less distortion.

Inverse feedback may also be applied to resistance-coupled stages, as shown in Fig. 50. The circuit is conventional except that a feedback resistor,

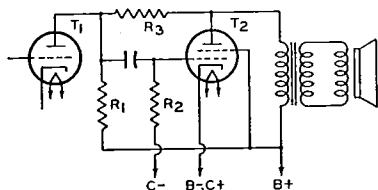


Fig. 50—Resistance-coupled stages using feedback resistor.

$R_3$ , is connected between the plates of tubes  $T_1$  and  $T_2$ . The output signal voltage of  $T_1$  and a portion of the output signal voltage of  $T_2$  appear across  $R_2$ . Because the distortion generated in the plate circuit of  $T_2$  is applied to its grid out of phase with the input signal, the distortion in the output of  $T_2$  is comparatively low. With sufficient inverse feedback of the constant-voltage type in a power-output stage, it is not necessary to employ a network of resistance and capacitance in the output circuit to reduce response at high audio frequencies. Inverse-feedback circuits can also be applied to push-pull class A and class  $AB_1$  amplifiers.

**Constant-current** inverse feedback is usually obtained by omitting the bypass capacitor across a cathode resistor. This method decreases the gain and the distortion but increases the source impedance of the circuit. Consequently, the output voltage rises at the resonant frequency of the loudspeaker and accentuates hangover effects.

Inverse feedback is not generally applied to a triode power amplifier because the variation in speaker impedance with frequency does not produce much distortion in a triode stage having low plate resistance. It is sometimes applied in a pentode stage, but is not always convenient. As has been shown, when inverse feedback is used in an amplifier, the driving voltage must be increased in order to provide full power output. When inverse feedback is used with a pentode, the total driving voltage required for full power output may be inconveniently large, although still less

than that required for a triode. Because a beam power tube gives full power output on a comparatively small driving voltage, inverse feedback is especially applicable to beam power tubes. By means of inverse feedback, the high efficiency and high power output of beam power tubes can be combined with freedom from the effects of varying speaker impedance.

### Cathode-Follower Circuits

Another important application of inverse feedback is in the cathode-follower circuit, an example of which is shown in Fig. 51. In this application, the load has been transferred from the plate circuit to the cathode circuit of the tube. The input voltage is applied between the grid and ground, and the output voltage is obtained between the cathode and ground. The voltage amplification (V.A.) of this circuit is always less than unity and may be expressed by the following convenient formulas.

For a triode:

$$V. A. = \frac{\mu \times R_L}{r_p + [R_L \times (\mu + 1)]}$$

For a pentode:

$$V. A. = \frac{g_m \times R_L}{1 + (g_m \times R_L)}$$

In these formulas,  $\mu$  is the amplification factor,  $R_L$  is the load resistance in ohms,  $r_p$  is the plate resistance in ohms, and  $g_m$  is the transconductance in mhos.

The use of the cathode follower permits the design of circuits which have high input resistance and high output voltage. The output impedance is




Fig. 51—Cathode-follower circuit.

quite low and very low distortion may be obtained. Cathode-follower circuits may be used for power amplifiers or as impedance transformers designed either

to match a transmission line or to produce a relatively high output voltage at a low impedance level.

In a power amplifier which is transformer coupled to the load, the same output power can be obtained from the tube as would be obtained in a conventional grid-drive type of amplifier. The output impedance is very low and provides excellent damping to the load, with the result that very low distortion can be obtained. The peak-to-peak signal voltage, however, approaches  $1\frac{1}{2}$  times the plate supply voltage if maximum power output is required from the tube. Some problems may be encountered, therefore, in the design of an adequate driver stage for a cathode-follower output system.

When a cathode-follower circuit is used as an impedance transformer, the load is usually a simple resistance in the cathode circuit of the tube. With relatively low values of cathode resistor, the circuit may be designed to supply significant amounts of power and to match the impedance of the device to a transmission line. With somewhat higher values of cathode resistor, the circuit may be used to decrease the output impedance sufficiently to permit the transmission of audio signals along a line in which appreciable capacitance is present.

The cathode follower may also be used as an isolation device to provide extremely high input resistance and low input capacitance as might be required in the probe of an oscilloscope or vacuum-tube voltmeter. Such circuits can be designed to provide effective impedance transformation with no significant loss of voltage.

Selection of a suitable tube and its operating conditions for use in a cathode-follower circuit having a specified output impedance ( $Z_o$ ) can be made, in most practical cases, by the use of the following formula to determine the approximate value of the required tube transconductance.

$$\text{Required } g_m (\mu\text{mhos}) = \frac{1,000,000}{Z_o (\text{Ohms})}$$

Once the required transconductance is obtained, a suitable tube and its operating conditions may be determined

from the technical data given in the **Technical Data** section. The tube selected should have a value of transconductance slightly lower than that obtained from the above expression to allow for the shunting effect of the cathode load resistance. The conversion nomograph given in Fig. 44 may be used for calculation of operating conditions for values of transconductance not included in the tabulated data. After the operating conditions have been determined, the approximate value of the required cathode load resistance may be calculated from the following formulas. For a triode:

$$\text{Cathode } R_L = \frac{Z_o \times r_p}{r_p - [Z_o \times (1 + \mu)]}$$

For a pentode:

$$\text{Cathode } R_L = \frac{Z_o}{1 - (g_m \times Z_o)}$$

Resistance and impedance values are in ohms; transconductance values are in mhos.

If the value of the cathode load resistance calculated to provide the required output impedance does not provide the required operating bias, the basic cathode-follower circuit can be modified in a number of ways. Two of the more common modifications are shown in Figs. 52 and 53.

In Fig. 52 the bias is increased by adding a bypassed resistance between




Fig. 52—Cathode-follower circuit modified for increased bias.

the cathode and the unbypassed load resistance and returning the grid to the low end of the load resistance. In Fig. 53 the bias is reduced by adding a bypassed resistance between the cathode and the unbypassed load resistance but, in this case, the grid is returned to the

junction of the two cathode resistors so that the bias voltage is only the dc voltage drop across the added resistance. The size of the bypass capacitor should be large enough so that it has negligible reactance at the lowest frequency to be handled. In both cases the B-supply should be increased to make up for the voltage taken for biasing.




Fig. 53—Cathode-follower circuit modified for reduced bias.

**Example:** Select a suitable tube and determine the operating conditions and circuit components for a cathode-follower circuit having an output impedance that will match a 500-ohm transmission line.

**Procedure:** First, determine the approximate transconductance required.

$$\text{Required } g_m = \frac{1,000,000}{500} = 2000 \mu\text{mhos}$$

A survey of the tubes that have a transconductance in this order of magnitude shows that type 12AX7A is among the tubes to be considered. Referring to the characteristics given in the technical data section for one triode unit of high-mu twin triode 12AX7, we find that for a plate voltage of 250 volts and a bias of  $-2$  volts, the transconductance is 1600 micromhos, the plate resistance is 62500 ohms, the amplification factor is 100, and the plate current is 0.0012 ampere. When these values are used in the expression for determining the cathode load resistance, the following result is obtained:

$$\text{Cathode } R_L = \frac{500 \times 62500}{62500 - 500 \times (100 + 1)} = 2600 \text{ ohms}$$

The voltage across this resistor for a plate current of 0.0012 ampere is  $2600 \times 0.0012 = 3.12$  volts. Because

the required bias voltage is only  $-2$  volts, the circuit arrangement given in Fig. 53 is employed. The bias is furnished by a resistance that will have a voltage drop of 2 volts when it carries a current of 0.0012 ampere. The required bias resistance, therefore, is  $2/0.0012 = 1670$  ohms. If 60 Hz is the lowest frequency to be passed, 20 microfarads is a suitable value for the bypass capacitor. The B-supply, of course, is increased by the voltage drop across the cathode resistance which, in this example, is approximately 5 volts. The B-supply, therefore, is  $250 + 5 = 255$  volts.

Because it is desirable to eliminate, if possible, the bias resistor and bypass capacitor, it is worthwhile to try other tubes and other operating conditions to obtain a value of cathode load resistance which will also provide the required bias. If the triode section of twin diode—high-mu triode 6AT6 is operated under the conditions given in the technical data section with a plate voltage of 100 volts and a bias of  $-1$  volt, it will have an amplification factor of 70, a plate resistance of 54000 ohms, a transconductance of 1300 micromhos, and a plate current of 0.0008 ampere. Then,

$$\text{Cathode } R_L = \frac{500 \times 54000}{54000 - 500 \times (70 + 1)} = 1460 \text{ ohms}$$

The bias voltage obtained across this resistance is  $1460 \times 0.0008 = 1.17$  volts. Since this value is for all practical purposes close enough to the required bias, no addition bias resistance will be required and the grid may be returned directly to ground. There is no need to adjust the B-supply voltage to make up for the drop in the cathode resistor. The voltage amplification (V.A.) for the cathode-follower circuit utilizing the triode section of type 6AT6 is

$$\text{V.A.} = \frac{70 \times 1460}{54000 + 1460 \times (70 + 1)} = 0.65$$

For applications in which the cathode follower is used to isolate two circuits—for example, when it is used between a circuit being tested and the input stage of an oscilloscope or a vacuum-tube voltmeter—voltage output



and not impedance matching is the primary consideration. In such applications it is desirable to use a relatively high value of cathode load resistance, such as 50,000 ohms, in order to get the maximum voltage output. In order to obtain proper bias, a circuit such as that of Fig. 53 should be used. With a high value of cathode resistance, the voltage amplification will approximate unity.

### Corrective Filters

A corrective filter can be used to improve the frequency characteristic of an output stage using a beam power tube or a pentode when inverse feedback is not applicable. The filter consists of a resistor and a capacitor connected in series across the primary of the output transformer. Connected in this way, the filter is in parallel with the plate load impedance reflected from the voice-coil by the output transformer. The magnitude of this reflected impedance increases with increasing frequency in the middle and upper audio range. The impedance of the filter, however, decreases with increasing frequency. It follows that, by use of the proper values for the resistance and the capacitance in the filter, the effective load impedance on the output tubes can be made practically constant for all frequencies in the middle and upper audio range. The result is an improvement in the frequency characteristic of the output stage.

The resistance to be used in the filter for a push-pull stage is 1.3 times the recommended plate-to-plate load resistance; or, for a single-tube stage, is 1.3 times the recommended plate load resistance. The capacitance in the filter should have a value such that the voltage gain of the output stage at a frequency of 1000 Hz or higher is equal to the voltage gain at 400 Hz.

A method of determining the proper value of capacitance for the filter is to make two measurements of the output voltage across the primary of the output transformer: first, when a 400-Hz signal is applied to the input, and second, when a 1000-Hz signal of the same voltage as the 400-Hz signal is applied to the input. The correct value of capacitance is the one which gives equal output voltages for the two signal inputs. In practice, this value is usually found to be in the order of 0.05 microfarad.

### Phonograph and Tape Preamplifiers

The frequency range and dynamic range\* which can be recorded on a phonograph record or on magnetic tape depend on several factors, including the composition, mechanical characteristics, and speed of the record or tape, and the electrical and mechanical characteristics of the recording equipment. To achieve wide frequency and dynamic ranges, manufacturers of commercial recordings use equipment which introduces a nonuniform relationship between amplitude and frequency. This relationship is known as a "recording characteristic." To assure proper reproduction of a high-fidelity recording, therefore, some part of the reproducing system must have a frequency-response characteristic which is the inverse of the recording characteristic. Most manufacturers of high-fidelity recordings use the RIAA characteristic for discs and the NARTB characteristic for magnetic tape.

The simplest type of equalization network is shown in Fig. 54. Because the capacitor C is effectively an open circuit at low frequencies, the low frequencies must be passed through the resistor R and are attenuated. The capacitor has a lower reactance at high




Fig. 54—Simple RC frequency-compensation network.

\* The dynamic range of an amplifier is a measure of its signal-handling capability. The dynamic range expresses in dB the ratio of the maximum usable output signal (generally for a distortion of about 10 per cent) to the minimum usable output signal (generally for a signal-to-noise ratio of about 20 dB). A dynamic range of 40 dB is usually acceptable; a value of 70 dB is exceptional for any audio system.

frequencies, however, and bypasses high-frequency components around R so that they receive negligible attenuation. Thus the network effectively "boosts" the high frequencies. This type of equalization is called "attenuative."

Some typical preamplifier stages are shown in the **Circuits** section. The location of the frequency-compensating network or "equalizer" in the reproducing system will depend on the types of recordings which are to be reproduced and on the pickup devices used.

A ceramic high-fidelity phonograph pickup is usually designed to provide proper compensation for the RIAA recording characteristic when the pickup is operated into the load resistance specified by its manufacturer. Because this type of pickup also has relatively high output (0.5 to 1.5 volts), it does not require the use of either an equalizer network or a preamplifier, and can be connected directly to the input of a tone-control amplifier and/or power amplifier.

A magnetic high-fidelity phonograph pickup, on the other hand, usually has an essentially flat frequency-response characteristic and very low output (1 to 10 millivolts). Because a pickup of this type merely reproduces the recording characteristic, it must be followed by an equalizer network, as well as by a preamplifier having sufficient voltage gain to provide the input voltage required by the tone-control amplifier and/or power amplifier. Many designs include both the equalizing and amplifying circuits in a single unit.

A high-fidelity magnetic-tape pickup head, like a magnetic phonograph pickup, reproduces the recording characteristic and has an output of only a few millivolts. This type of pickup device, therefore, must also be followed by an equalizing network and preamplifier, or by a preamplifier which provides "built-in" equalization for the NARTB characteristic.

**Feedback networks** may also be used for frequency compensation and for reduction of distortion. Basically, a feedback network returns a portion of the output signal to the input circuit of an amplifier. The feedback signal may be returned in phase with the input signal (**positive** or **regenerative** feedback) or 180 degrees out of phase with the input signal (**negative**, **inverse**, or **degenerative** feedback). In either case, the feedback can be made proportional to either the output voltage or the output current, and can be applied to either the input voltage or the input current. A negative feedback signal proportional to the output current raises the output impedance of the amplifier; negative feedback proportional to the output voltage reduces the output impedance. A negative feedback signal applied to the input current decreases the input impedance; negative feedback applied to the input voltage increases the input impedance. Opposite effects are produced by positive feedback.

A simple negative or inverse feedback network is shown in Fig. 55. This network provides equalization comparable to that obtained with Fig. 54, but is more suitable for low-level amplifier stages because it does not require the first amplifier stage to provide high-level low frequencies. In addition, the inverse feedback improves the distortion characteristics of the amplifier.

Some preamplifier or low-level audio amplifier circuits include variable resistors or potentiometers which function as **volume** or **tone controls**. Such circuits should be designed to minimize the flow of dc currents through these controls so that little or no noise will be developed by the movable contact during the life of the circuit. Volume controls and their associated circuits should permit variation of gain from zero to maximum, and should attenuate all frequencies equally for all positions




Fig. 55—Negative-feedback frequency-compensation network.

of the variable arm of the control. Several examples of volume controls and tone controls are shown in the **Circuits** section.

### Tone Controls

A tone control is a variable filter (or one in which at least one element is adjustable) by means of which the user may vary the frequency response of an amplifier to suit his own taste. In radio receivers and home amplifiers, the tone control usually consists of a resistance-capacitance network in which the resistance is the variable element.

The simplest form of tone control is a fixed tone-compensating or "equalizing" network such as that shown in Fig. 56. This type of network is often

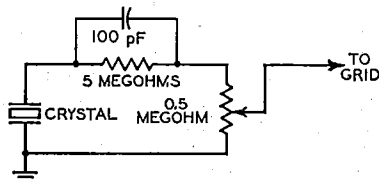


Fig. 56—Tone-control circuit for fixed tone compensation or "equalizing".

used to equalize the low- and high-frequency response of a crystal phonograph pickup. At low frequencies the attenuation of this network is 20.8 dB. As the frequency is increased, the 100-picofarad capacitor serves as a bypass for the 5-megohm resistor, and the combined impedance of the resistor-capacitor network is reduced. Thus, more of the crystal output appears across the 0.5-megohm resistor at high

frequencies than at low frequencies, and the frequency response at the grid is reasonably flat over a wide frequency range. Fig. 57 shows a comparison between the output of the crystal (curve A) and the output of the equalizing network (curve B). The response curve

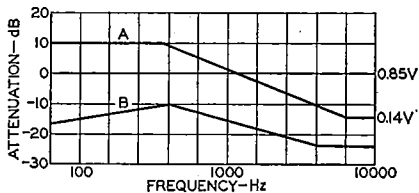


Fig. 57—Curve showing output from crystal phonograph pickup (A) and from equalizing network (B).

can be "flattened" still more if the attenuation at low frequencies is increased by changing the 0.5-megohm resistor to 0.125 megohm.

The tone-control network shown in Fig. 58 has two stages with completely separate bass and treble controls. Fig. 59 shows simplified representations of the bass control of this circuit when the potentiometer is turned to its extreme variations (usually labeled "Boost" and "Cut"). In this network, as in the crystal-equalizing network shown in Fig. 56, the parallel RC combination is the controlling factor. For bass "boost," the capacitor  $C_2$  bypasses resistor  $R_3$  so that less impedance is placed across the output to grid B at high frequencies than at low frequencies. For bass "cut," the parallel combination is shifted so that  $C_1$  bypasses  $R_3$ , causing more high-frequency than low-frequency output. Essentially, the network is a variable-

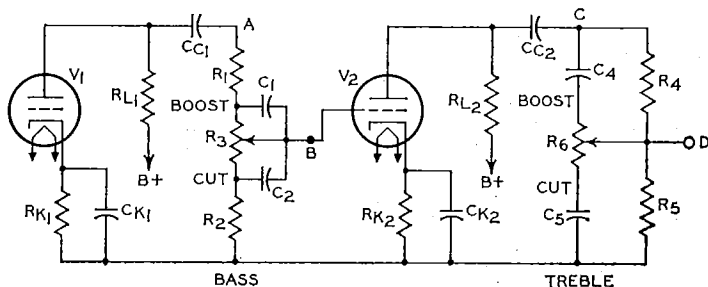


Fig. 58—Two-stage tone-control circuit incorporating separate bass and treble controls.

frequency voltage divider. With proper values for the components, it may be made to respond to changes in the  $R_1$  potentiometer setting for only low frequencies (below 1000 Hz).

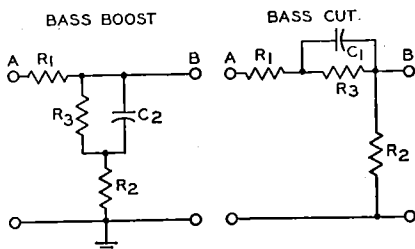


Fig. 59—Simplified representations of bass-control circuit at extreme ends of potentiometer.

Fig. 60 shows extreme positions of the treble control. The attenuation of the two circuits is approximately the same at 1000 Hz. The treble "boost" circuit is similar to the crystal-equalizing network shown in Fig. 56. In the treble "cut" circuit, the parallel RC elements serve to attenuate the signal voltage further because the capacitor bypasses the resistance across the output.

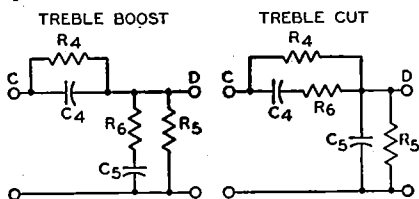


Fig. 60—Simplified representations of treble-control circuit at extreme ends of potentiometer.

The effect of the capacitor is negligible at low frequencies; beyond 1000 Hz, the signal voltage is attenuated at a maximum rate of 6 dB per octave.

The location of a tone-control network is of considerable importance. In a typical radio receiver, it may be inserted in the plate circuit of the power tube, the coupling circuit between the first af amplifier tube and the power tube, or the grid circuit of the first tube. In an amplifier using a beam power tube or pentode power amplifier without negative feedback, it is desirable to connect a resistance-

capacitance filter across the primary of the output transformer. This filter may be fixed, with a supplementary tone control elsewhere, or it may form the tone control itself. If the amplifier incorporates negative feedback, the tone control may be inserted in the feedback network or else should be connected to a part of the amplifier which is external to the feedback loop. The overall gain of a well designed tone-control network should be approximately unity.

### Automatic Volume or Gain Control

The chief purpose of automatic volume control (avc) or automatic gain control (agc) in a radio or television receiver is to prevent fluctuations in loudspeaker volume or picture brightness when the audio or video signal at the antenna is fading in and out.

An automatic volume control circuit regulates the receiver rf and if gain so that this gain is less for a strong signal than for a weak signal. In this way, when the signal strength at the antenna changes, the avc circuit reduces the resultant change in the voltage output of the last if stage and consequently reduces the change in the speaker output volume.

The avc circuit reduces the rf and if gain for a strong signal usually by increasing the negative bias of the rf, if, and frequency-mixer stage when the signal increases. A simple avc circuit is shown in Fig. 61. On each positive half-cycle of the signal voltage, when the diode plate is positive with respect to the cathode, the diode passes current.




Fig. 61—Automatic-volume-control (avc) circuit.

Because of the flow of diode current through  $R_1$ , there is a voltage drop across  $R_1$  which makes the left end of  $R_1$  negative with respect to ground. This

voltage drop across  $R_1$  is applied, through the filter  $R_2$  and  $C$ , as negative bias on the grids of the preceding stages. When the signal strength at the antenna increases, therefore, the signal applied to the avc diode increases, the voltage drop across  $R_1$  increases, the negative bias voltage applied to the rf and if stages increases, and the gain of the rf and if stages is decreased. Thus the increase in signal strength at the antenna does not produce as much increase in the output of the last if stage as it would produce without avc.

When the signal strength at the antenna decreases from a previous steady value, the avc circuit acts, of course, in the reverse direction, applying less negative bias, permitting the rf and if gain to increase, and thus reducing the decrease in the signal output of the last if stage. In this way, when the signal strength at the antenna changes, the avc circuit acts to reduce change in the output of the last if stage, and thus acts to reduce change in loudspeaker volume.

The filter,  $C$  and  $R_2$ , prevents the avc voltage from varying at audio frequency. The filter is necessary because the voltage drop across  $R_1$  varies with the modulation of the carrier being received. If avc voltage were taken directly from  $R_1$  without filtering, the audio variations in avc voltage would vary the receiver gain so as to smooth out the modulation of the carrier. To avoid this effect, the avc voltage is taken from the capacitor  $C$ . Because of the resistance  $R_2$  in series with  $C$ , the capacitor  $C$  can charge and discharge at only a comparatively slow rate. The avc voltage therefore cannot vary at frequencies as high as the audio range but can vary at frequencies high enough to compensate for most fading. Thus the filter permits the avc circuit to smooth out variations in signal due to fading, but prevents the circuit from smoothing out audio modulation.

It will be seen that an avc circuit and a diode-detector circuit are much alike. It is therefore convenient in a receiver to combine the detector and the avc diode in a single stage. Examples of how these functions are combined in

receivers are shown in **Circuits** section.

In the circuit shown in Fig. 61, a certain amount of avc negative bias is applied to the preceding stages on a weak signal. Because it may be desirable to maintain the receiver rf and if gain at the maximum possible value for a weak signal, avc circuits are designed in some cases to apply no avc bias until the signal strength exceeds a certain value. These avc circuits are known as **delayed avc** or **davc** circuits.

A davc circuit is shown in Fig. 62. In this circuit, the diode section  $D_1$  of the 6AL5 acts as detector and avc diode.

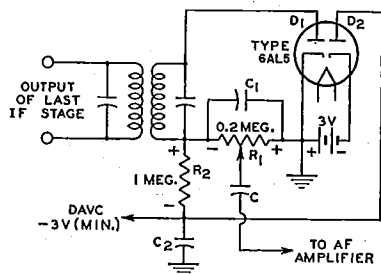


Fig. 62—Delayed avc (davc) circuit.

$R_1$  is the diode load resistor and  $R_2$  and  $C_2$  are the avc filter. Because the cathode of diode  $D_2$  is returned through a fixed supply of  $-3$  volts to the cathode of  $D_1$ , a dc current flows through  $R_1$  and  $R_2$  in series with  $D_2$ . The voltage drop caused by this current places the avc lead at approximately  $-3$  volts (less the negligible drop through  $D_2$ ). When the average amplitude of the rectified signal developed across  $R_1$  does not exceed 3 volts, the avc lead remains at  $-3$  volts. Hence, for signals not strong enough to develop 3 volts across  $R_1$ , the bias applied to the controlled tubes stays constant at a value giving high sensitivity.

However, when the average amplitude of rectified signal voltage across  $R_1$  exceeds 3 volts, the plate of diode  $D_2$  becomes more negative than the cathode of  $D_2$  and current flow in diode  $D_2$  ceases. The potential of the avc lead is then controlled by the voltage developed across  $R_1$ . Therefore, with further increase in signal strength, the avc circuit applies an increasing avc

bias voltage to the controlled stages. In this way, the circuit regulates the receiver gain for strong signals, but permits the gain to stay constant at a maximum value for weak signals.

It can be seen in Fig. 62 that a portion of the  $-3$  volts delay voltage is applied to the plate of the detector diode  $D_1$ , this portion being approximately equal to  $R_1/(R_1 + R_2)$  times  $-3$  volts. Hence, with the circuit constants as shown, the detector plate is made negative with respect to its cathode by approximately one-half volt. However, this voltage does not interfere with detection because it is not large enough to prevent current flow in the tube.

**Automatic gain control (agc)** compensates for fluctuations in rf picture carrier amplitude. The peak carrier level rather than the average carrier level is controlled by the agc voltage because the peaks of the sync pulses are fixed when inserted on a fixed carrier level. The peak carrier level may be determined by measurement of the peaks of the sync pulses at the output of the video detector.

A conventional agc circuit, such as that shown in Fig. 63, consists of a diode

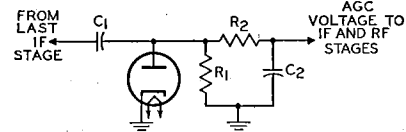


Fig. 63—Automatic-gain control (agc) circuit.

detector circuit and an RC filter. The time constant of the detector circuit is made large enough to prevent the picture content from influencing the magnitude of the agc voltage. The output voltage (agc voltage) is equal to the peak value of the incoming signal.

The diode detector receives the incoming signal from the last if stage of the television receiver through the capacitor  $C_1$ . The resistor  $R_1$  provides the load for the diode. The diode conducts only when its plate is driven positive with respect to its cathode. Electrons then flow from the cathode to the plate and thence into capacitor  $C_1$ , where the negative charge is stored. Because of the

low impedance offered by the diode during conduction,  $C_1$  charges up to the value of the peak applied voltage.

During the negative excursion of the signal, the diode does not conduct, and  $C_1$  discharges through resistor  $R_1$ . Because of the large time constant of  $R_1C_1$ , however, only a small percentage of the voltage across  $C_1$  is lost during the interval between horizontal sync pulses. During succeeding positive cycles, the incoming signal must overcome the negative charge stored in  $C_1$  before the diode conducts, and plate current flows only at the peak of each positive cycle. The voltage across  $C_1$ , therefore, is determined by the level of the peaks of the positive cycles, or the sync pulses.

The negative voltage developed across resistor  $R_1$  by the sync pulses is filtered by resistor  $R_2$  and capacitor  $C_2$  to remove the 15,750-cycle ripple of the horizontal sync pulse. The dc output is then fed to the if and rf amplifiers as an agc voltage.

This agc system may be expanded to include amplification of the agc signal before detection of the peak level, or amplification of the dc output, or both. A direct-coupled amplifier must be used for amplification of the dc signal. The addition of amplification makes the system more sensitive to changes in carrier level.

A "keyed" agc system such as that shown in Fig. 64 is used to eliminate flutter and to improve noise immunity in weak signal areas. This system provides more rapid action than the conventional agc circuits because the filter circuit can employ lower capacitance and resistance values.

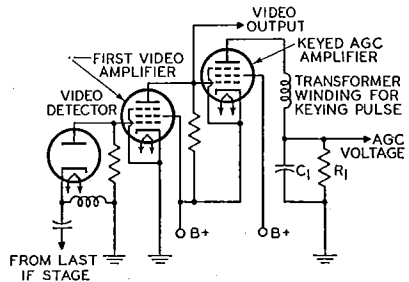


Fig. 64—"Keyed" agc circuit.

In the keyed agc system, the negative output of the video detector is fed directly to the grid No. 1 of the first video amplifier. The positive output of the video amplifier is, in turn, fed directly to the grid No. 1 of the keyed agc amplifier. The video stage increases the gain of the agc system and, in addition, provides noise clipping. The plate voltage for the agc amplifier is a positive pulse obtained from a small winding on the horizontal output transformer which is in phase with the horizontal sync pulse obtained from the video amplifier. The polarity of this pulse is such that the plate of the agc amplifier tube is positive during the retrace time. The tube is biased so that current flows only when the grid No. 1 and the plate are driven positive simultaneously. The amount of current flow depends on the grid-No. 1 potential during the pulse. These pulses are smoothed out in the RC network in the plate circuit ( $R_1C_1$ ). Because the dc voltage developed across  $R_1$  is negative, it is suitable for application to the grids of the rf and if tubes as an agc voltage.

### *High-Fidelity Amplifiers*

Several high-fidelity amplifiers are shown in the **Circuits** section. The performance capabilities of such amplifiers are usually given in terms of frequency response, total harmonic distortion, maximum power output, and noise level.

To provide high-fidelity reproduction of audio program material, an amplifier should have a frequency response which does not vary more than 1 dB over the entire audio spectrum. General practice is to design the amplifier so that its frequency response is flat within 1 dB from a frequency below the lowest to be reproduced to one well above the upper limit of the audible region.

Harmonic distortion and intermodulation distortion produce changes in program material which may have adverse effects on the quality of the reproduced sound. **Harmonic distortion** causes a change in the character of an individual tone by the introduction of harmonics which were not originally present in the program material. For

high-fidelity reproduction, total harmonic distortion (expressed as a percentage of the output power) should not be greater than about 1 per cent at the desired listening level. Types such as the 6973, 7027A and 7868 are designed to provide extremely low harmonic distortion in suitably designed push-pull amplifier circuits.

**Intermodulation distortion** is a change in the waveform of an individual tone as a result of interaction with another tone present at the same time in the program material. This type of distortion not only alters the character of the modulated tone, but may also result in the generation of spurious signals at frequencies equal to the sum and difference of the interacting frequencies. Intermodulation distortion should be less than 2 per cent at the desired listening level. In general, any amplifier which has low intermodulation distortion will have very low harmonic distortion.

The maximum power output which a high-fidelity amplifier should deliver depends upon a complex relation of several factors, including the size and acoustical characteristics of the listening area, the desired listening level, and the efficiency of the loudspeaker system. Practically, however, it is possible to determine amplifier requirements in terms of room size and loudspeaker efficiency.

The acoustic power required to reproduce the loudest passages of orchestral music at concert-hall level in the average-size living room is about 0.4 watt. Because high-fidelity loudspeakers of the type generally available for home use have an efficiency of only about 5 per cent, the output stage of the amplifier should therefore be able to deliver a power output of at least 8 watts. Because many wide-range loudspeaker systems, particularly those using frequency-divider networks, have efficiencies of less than 5 per cent, output tubes used with such systems must have correspondingly larger power outputs. The 6973, 7027A, 7189, and 7868 can provide ample output for most systems when used in suitable push-pull circuits.

The noise level of a high-fidelity

amplifier determines the range of volume the amplifier is able to reproduce, *i.e.*, the difference (usually expressed in decibels) between the loudest and softest sounds in program material. Because the greatest volume range utilized in electrical program material at the present time is about 60 dB, the noise level of a high-fidelity amplifier should be at least 60 dB below the signal level at the desired listening level.

#### *Limiters*

An amplifier may also be used as a limiter. One use of a limiter is in receivers designed for the reception of frequency-modulated signals. The limiter in FM receivers has the function of eliminating amplitude variations from the input to the detector. Because in an FM system amplitude variations are primarily the result of noise disturbances, the use of a limiter prevents such disturbances from being reproduced in the audio output. The limiter usually follows the last if stage so that it can minimize the effects of disturbances coming in on the rf carrier and those produced locally.

The limiter is essentially an if voltage amplifier designed for saturated operation. Saturated operation means that an increase in signal voltage above a certain value produces very little increase in plate current. A signal voltage which is never less than sufficient to cause saturation of the limiter, even on weak signals, is supplied to the limiter input by the preceding stages. Any change in amplitude, therefore, such as might be produced by noise voltage fluctuation, is not reproduced in the limiter output. The limiting action, of course, does not interfere with the reproduction of frequency variations.

Plate-current saturation of the limiter may be obtained by the use of grid-No. 1 resistor-and-capacitor bias with plate and grid-No. 2 voltages which are low compared with customary if-amplifier operating conditions.

As a result of these design features, the limiter is able to maintain its output voltage at a constant amplitude over a wide range of input-signal voltage variations. The output of the limiter is frequency-modulated if voltage, the mean

frequency of which is that of the if amplifier. This voltage is impressed on the input of the detector.

The reception of FM signals without serious distortion requires that the response of the receiver be such that satisfactory amplification of the signal is provided over the entire range of frequency deviation from the mean frequency. Since the frequency at any instant depends on the modulation at that instant, it follows that excessive attenuation toward the edges of the band, in the rf or if stages, will cause distortion. In a high-fidelity receiver, therefore, the amplifiers must be capable of amplifying, for the maximum permissible frequency deviation of 75 kHz, a band 150 kHz wide. Suitable tubes for this purpose are the 6BA6 and 6BJ6.

#### *Volume Compressors and Expanders*

Volume compression and expansion are used in FM transmitters and receivers and in recording devices and amplifiers to make more natural the reproduction of music which has a very large volume range. For example, in the music of a symphony orchestra the sound intensity of the soft passages is very much lower than that of the loud passages. When this low volume level is raised above the background noise for transmitting or recording, the peak level of the program material may be raised to an excessively high volume level. It is often necessary, therefore, to compress the volume range of the program content within the maximum capabilities of the FM transmitter or the recording device. Exceeding a maximum peak volume level for FM modulation corresponds to exceeding the allowed bandwidth for transmission. In some recording devices, excessive peak volume levels may cause overloading and distortion.

Volume compression may be accomplished by either manual or automatic control. The types of compression used include peak limiters, volume limiters, and volume compressors. A peak limiter limits the peak power to some predetermined level. A volume limiter provides gain reduction based on an



average signal level above a predetermined level. A volume compressor provides gain reduction for only the sustained loud portions of the sound level. Only volume compressors can be correctly compensated for with volume expanders.

For faithful reproduction of the original sound, the volume expander used in the FM receiver or audio amplifier should have the reverse characteristic of the volume compressor used in the FM transmitter or recording device. In general, the basic requirements for either a volume compressor or expander are shown in the block diagram of Fig. 65. In a volume compressor, the

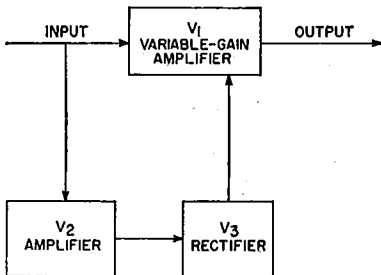


Fig. 65—Block diagram of volume compressor or expander circuit.

variable-gain amplifier  $V_1$  has greater gain for a low-amplitude signal than for a high-amplitude signal; therefore, soft passages are amplified more than loud ones. In an expander, the gain is greater for high-amplitude signals than for low-amplitude signals; therefore, loud passages are amplified more than soft ones and the original amplitude ratio is restored.

In the diagram shown in Fig. 65, the signal to be amplified is applied to  $V_1$ , and a portion of the signal is also applied to  $V_2$ . The amplified output from  $V_2$  is then rectified by  $V_3$ , and applied as a negative (for compressors) or positive (for expanders) bias voltage to  $V_1$ . As this bias voltage varies with variations in signal amplitude, the gain of  $V_1$  also varies to produce the desired compression or expansion of the signal.

Tubes having a large dynamic range provide the best results in volume

compressor or expander applications. An example of this type is the 6BJ6. Push-pull operation is generally desired for the variable-gain amplifier to prevent high distortion and other undesirable effects which may occur in volume compressors and expanders.

### Phase Inverters

A phase inverter is a circuit used to provide resistance coupling between the output of a single-tube stage and the input of a push-pull stage. The necessity for a phase inverter arises because the signal-voltage inputs to the grids of a push-pull stage must be 180 degrees out of phase and approximately equal in amplitude with respect to each other. Thus, when the signal voltage input to a push-pull stage swings the grid of one tube in a positive direction, it should swing the grid of the other tube in a negative direction by a similar amount. With transformer coupling between stages, the out-of-phase input voltage to the push-pull stage is supplied by means of the center-tapped secondary. With resistance coupling, the out-of-phase input voltage is obtained by means of the inverter action of a tube.

Fig. 66 shows a push-pull power amplifier, resistance-coupled by means of a phase-inverter circuit to a single-stage triode  $T_1$ . Phase inversion in this circuit is provided by triode  $T_2$ . The output voltage of  $T_1$  is applied to the grid No. 1 of tetrode  $T_3$ . A portion of the output voltage of  $T_1$  is also applied through the resistors  $R_3$  and  $R_4$  to the

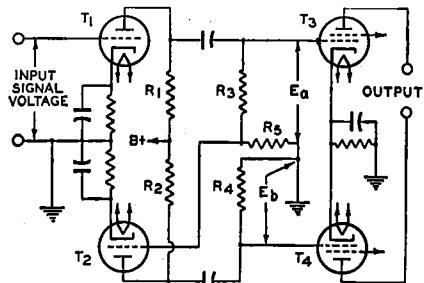


Fig. 66—Push-pull power amplifier resistance-coupled to triode by means of phase inverter.

grid of  $T_2$ . The output voltage of  $T_2$  is applied to the grid No. 1 of tetrode  $T_4$ .

When the output voltage of  $T_1$  swings in the positive direction, the plate current of  $T_2$  increases. This action increases the voltage drop across the plate resistor  $R_2$  and swings the plate of  $T_2$  in the negative direction. Thus, when the output voltage of  $T_1$  swings positive, the output voltage of  $T_2$  swings negative and is, therefore, 180 degrees out of phase with the output voltage of  $T_1$ .

In order to obtain equal voltages at  $E_a$  and  $E_b$ ,  $(R_3 + R_5)/R_5$  should equal the voltage gain of  $T_2$ . Under the condition where a twin-type tube or two tubes having the same characteristics are used as  $T_1$  and  $T_2$ ,  $R_4$  should be equal to the sum of  $R_3$  and  $R_5$ . The ratio of  $R_3 + R_5$  to  $R_5$  should be the same as the voltage gain ratio of  $T_2$  in order to apply the correct value of signal voltage to  $T_2$ . The value of  $R_5$  is, therefore, equal to  $R_4$  divided by the voltage gain of  $T_2$ ;  $R_3$  is equal to  $R_4$  minus  $R_5$ . Values of  $R_1$ ,  $R_2$ ,  $R_3$  plus  $R_5$ , and  $R_4$  may be taken from the chart in the **Resistance-Coupled Amplifiers** section. In the practical application of this circuit, it is convenient to use a twin-triode tube combining  $T_1$  and  $T_2$ .

### Tuned Amplifiers

In radio-frequency (rf) and intermediate-frequency (if) amplifiers, the bandwidth of frequencies to be amplified is usually only a small percentage of the center frequency. Tuned amplifiers are used in these applications to select the desired bandwidth of frequencies and to suppress unwanted frequencies. The selectivity of the amplifier is obtained by means of tuned interstage coupling networks.

The properties of tuned amplifiers depend upon the characteristics of **resonant circuits**. A simple parallel resonant circuit (sometimes called a "tank" because it stores energy) is shown in Fig. 67. For practical purposes the resonant frequency of such a circuit may be considered independent of the resistance  $R$ , provided  $R$  is small compared to the inductive reactance  $X_L$ .

The resonant frequency  $f_r$  is then given by

$$f_r = \frac{1}{2\pi\sqrt{LC}}$$

For any given resonant frequency, the product of  $L$  and  $C$  is a constant; at low frequencies  $LC$  is large; at high frequencies it is small.

The **Q (selectivity)** of a parallel resonant circuit alone is the ratio of the current in the tank ( $I_L$  or  $I_C$ ) to the current in the line ( $I$ ). This unloaded  $Q$ , or  $Q_0$ , may be expressed in various ways, for example:

$$Q_0 = \frac{I_C}{I} = \frac{X_L}{R} = \frac{R_p}{X_C}$$

where  $X_L$  is the inductive reactance ( $= 2\pi fL$ ),  $X_C$  is the capacitive reactance ( $= 1/[2\pi fC]$ ), and  $R_p$  is the total impedance of the parallel resonant circuit




Fig. 67—Simple parallel resonant circuit. (tank) at resonance. The  $Q$  varies inversely with the resistance of the inductor. The lower the resistance, the higher the  $Q$  and the greater the difference between the tank impedance at frequencies off resonance compared to the tank impedance at the resonant frequency.

The  $Q$  of a tuned interstage coupling network also depends upon the impedances of the preceding and following stages. The output impedance of a tube can be considered as consisting of a resistance  $R_o$  in parallel with a capacitance  $C_o$ , as shown in Fig. 68. Similarly, the input impedance can be considered as consisting of a resistance  $R_i$  in parallel with a capacitance  $C_i$ . Because the tuned circuit is shunted by both the output impedance of the preceding tube and the input impedance of the following tube, the effective selectivity of the circuit is the loaded  $Q$  (or

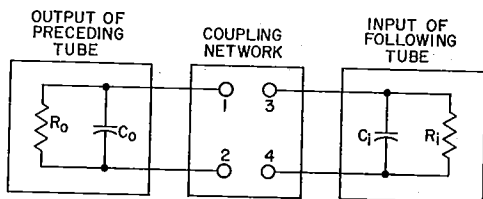


Fig. 68—Equivalent output and input circuits of tubes connected by a coupling network.

$Q_i$ ) based upon the total impedance of the coupled network, as follows:

$$Q_i = \frac{\text{total loading on coil at resonance}}{X_L \text{ or } X_C}$$

The capacitances  $C_0$  and  $C_1$  in Fig. 68 are usually considered as part of the coupling network. For example, if the required capacitance between terminals 1 and 2 of the coupling network is calculated to be 500 picofarads and the value of  $C_0$  is 10 picofarads, a capacitor of 490 picofarads is used between terminals 1 and 2 so that the total capacitance is 500 picofarads. The same method is used to allow for the capacitance  $C_1$  at terminals 3 and 4.

When a tuned resonant circuit in the primary winding of a transformer is coupled to the nonresonant secondary winding of the transformer, as shown in Fig. 69, the effect of the input impedance of the following stage on the  $Q$  of the tuned circuit can be determined by considering the values reflected (or referred) to the primary circuit by

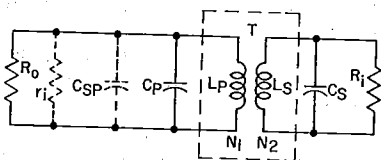


Fig. 69—Equivalent circuit for transformer-coupling network having tuned primary winding.

transformer action. The reflected resistance  $r_1$  is equal to the resistance  $R_1$  in the secondary circuit times the square of the effective turns ratio between the primary and secondary windings of the transformer  $T$ :

$$r_1 = R_1 (N_1/N_2)^2$$

where  $N_1/N_2$  represents the electrical turns ratio between the primary winding

and the secondary winding of  $T$ . If there is capacitance in the secondary circuit ( $C_s$ ), it is reflected to the primary circuit as a capacitance  $C_{sp}$ , and is given by

$$C_{sp} = C_p \div (N_1/N_2)^2$$

The loaded  $Q$ , or  $Q_L$ , is then calculated on the basis of the inductance  $L_p$ , the total shunt resistance ( $R_0$  plus  $r_1$  plus the tuned-circuit impedance  $Z_t = Q_0 X_C = Q_0 X_L$ ), and the total capacitance ( $C_p + C_{sp}$ ) in the tuned circuit.

Fig. 70 shows a coupling network which consists of a single-tuned circuit using mutual inductive coupling. The

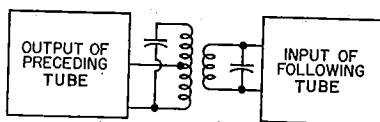


Fig. 70—Equivalent circuit for transformer-coupling network using inductive coupling.

capacitance  $C_t$  includes the effects of both the output capacitance of the preceding tube and the input capacitance of the following tube (referred to the primary of transformer  $T_1$ ). The bandwidth of a single-tuned transformer is determined by the half-power points on the resonance curve ( $-3$  dB or 0.707 down from the maximum). Under these conditions, the band pass  $\Delta f$  is equal to the ratio of the center or resonant frequency  $f_r$  divided by the loaded (effective)  $Q$  of the circuit, as follows:

$$\Delta f = f_r/Q_L$$

In high-frequency tuned amplifiers, where the input impedance is typically low, mutual inductive coupling may be impracticable because of the small number of turns in the secondary winding. It is extremely difficult in practice to construct a fractional part of a turn. In such cases, capacitance coupling may

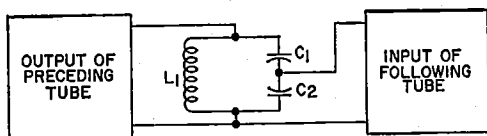


Fig. 71—Single-tuned coupling network using capacitive division.

be used, as shown in Fig. 71. This arrangement, which is also called **capacitive division**, is similar to tapping down on a coil at or near resonance. Impedance transformation in this network is determined by the ratio between capacitors  $C_1$  and  $C_2$ . Capacitor  $C_1$  is normally much smaller than  $C_2$ ; thus the capacitive reactance  $X_{C1}$  is normally much larger than  $X_{C2}$ . Provided the input resistance of the following tube is much greater than  $X_{C2}$ , the effective turns ratio from the top of the coil to the input of the following tube is  $(C_1 + C_2)/C_1$ . The total capacitance  $C_t$  across the inductance  $L$  is given by

$$C_t = \frac{C_1 C_2}{C_1 + C_2}$$

The resonant frequency  $f_r$  is then given by

$$f_r = \frac{1}{2\pi\sqrt{L_1 C_t}}$$

Double-tuned interstage coupling networks are often used in preference to single-tuned networks to provide flatter frequency response within the pass band, a sharper drop in response immediately adjacent to the ends of the pass band, or more attenuation at frequencies far removed from resonance. In synchronous double-tuned networks, both the resonant circuit in the input of the coupling network and the resonant circuit in the output are tuned to the same resonant frequency. In "stagger-tuned" networks, the two resonant circuits are tuned to slightly different resonant frequencies to provide a more rectangular band pass with sharper selectivity at the ends of the pass band. Double-tuned or stagger-tuned networks may use capacitive, inductive, or mutual inductance coupling, or any combination of the three.

#### Television Tuners

The vhf tuner of a television receiver selects the desired frequency

channel in the range from 55 to 216 MHz, amplifies it, and converts it to a lower intermediate frequency. These functions are accomplished in rf-amplifier, mixer, and local-oscillator stages employing tube types that are designed specifically for these applications. The rf-amplifier stage uses a high-transconductance tube that has small dimensions to maintain low interelectrode capacitances, particularly between grid and plate. The mixer and oscillator stages usually employ a dual-unit triode-pentode unit and a medium-mu triode unit.

Fig. 72 shows a simplified schematic diagram of a typical vhf television tuner. The balun converts the 300-ohm balanced antenna impedance to an unbalanced impedance of 75 ohms. The high-pass filter eliminates lower-frequency interference signals. The tuner is set to the desired frequency by simultaneous adjustment of the inductances indicated by the several sets of arrows in Fig. 72. The inductances are either replaced completely or incremental amounts of inductance are added as the tuner is switched from high frequencies to lower frequencies. Some tuners use a combination of the two methods.

Because **noise** generated in the first amplifier stage is often the controlling factor in determining the over-all sensitivity of a radio or television receiver, the "front end" is designed with special attention to both gain and noise characteristics. The input circuit of an amplifier inherently contains some thermal noise contributed by the resistive elements in the input device. When an input signal is amplified, therefore, the thermal noise generated in the input circuit is also amplified. If the ratio of signal power to noise power (**signal-to-noise ratio, S/N**) is the same in the output circuit as in the input circuit, the amplifier is considered to be "noise-

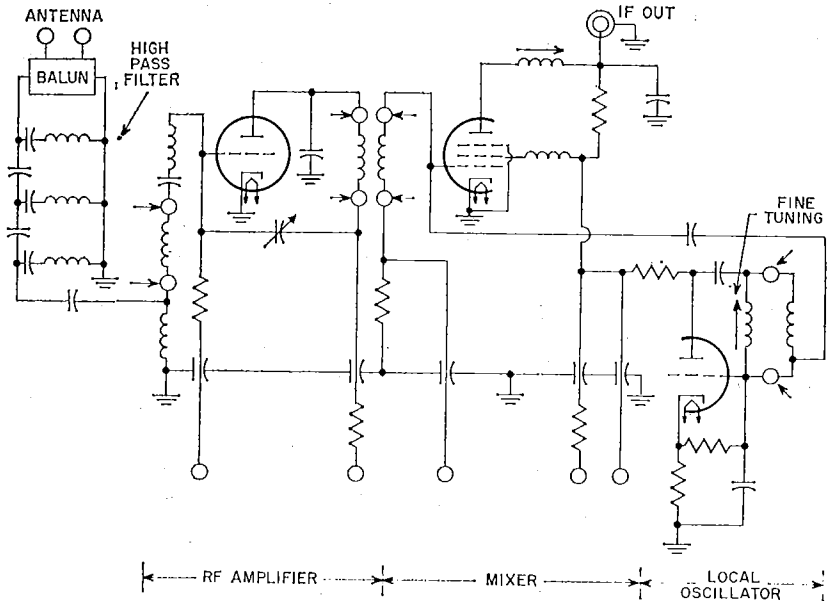


Fig. 72—Simplified schematic of typical vhf television tuner.

less," and is said to have a noise figure of unity, or zero dB.

In practical circuits, however, all amplifier stages generate a certain amount of noise as a result of thermal agitation of electrons in resistors and other components, minute variations in the cathode emission of tubes (shot effect), and minute grid currents in the amplifier tubes. As a result, the ratio of signal power to noise power is inevitably impaired during amplification. A measure of the degree of impairment is called the **noise figure (NF)** of the amplifier, and is expressed as the ratio of signal power to noise power at the input ( $S_1/N_1$ ) divided by the ratio of signal power to noise power at the output ( $S_o/N_o$ ), as follows:

$$NF = \frac{(S_1/N_1)}{(S_o/N_o)}$$

The noise figure in decibels (dB) is equal to ten times the logarithm of this power ratio. For example, a one-dB noise figure in an amplifier decreases the signal-to-noise ratio by a factor of 1.26, a 3-dB noise figure by a factor of 2, a 10-dB noise figure by a factor

of 10, and a 20-dB noise figure by a factor of 100.

The over-all noise figure of a receiver is affected by the total number of stages, as shown by the following relationship:

$$NF_{\text{receiver}} = NF_1 + \frac{(NF_2 + 1)}{G_1} + \frac{(NF_3 + 1)}{G_1 G_2} \dots$$

where G represents power gain and the subscripts indicate the number of each stage. This relationship indicates that the contribution of the second-stage noise factor to that of the over-all receiver is reduced by the gain of the first stage. Therefore, it is important that the rf amplifier have enough gain to make the effect of the second stage negligible. The third stage will then have even less effect. The maximum available power gain G of an rf stage is given by

$$G = \frac{g_m^2 R_{in} R_{out}}{4}$$

For maximum gain, therefore, the rf-amplifier tube should have high transconductance and high input and output impedances. At frequencies in the vhf

television band, the input resistance is small enough to affect the gain. As mentioned previously, the rf tube is designed to have low interelectrode capacitances, small interelectrode spacings, and low lead inductances (particularly the cathode lead).

The gain of the rf stage must be reduced as the incoming-signal amplitude changes to prevent overload distortion in the following stages. As the signal amplitude increases, an automatic-gain-control (agc) circuit biases the rf tube to decrease its gain. The rf tube usually employs a semiremote-cutoff grid to reduce cross-modulation distortion.

Either a triode or a pentode can be used in the **rf-amplifier** stage of tuner input circuits of vhf television receivers. Such stages are required to amplify signals ranging from 55 to 216 MHz and having a bandwidth of 4.5 MHz (the tuner is usually aligned for a bandwidth of 6 MHz to assure complete coverage of the band). In early rf tuners, pentodes rather than triodes were used because the grid-plate capacitance of triodes created stability problems. However, the use of twin triodes in direct-coupled cathode-drive circuits makes it possible to obtain stable operation along with the low-noise characteristics of triodes.

Pentodes or tetrodes do not provide the useful sensitivity of triodes because of the "partition noise" introduced by the screen grid. The direct-coupled cathode-drive circuit provides both the gain and the stability capabilities of the pentode, as well as the advantages of a low-noise triode input stage. Because the cathode-drive stage provides a low-impedance load to the grounded-cathode stage, the gain of the latter stage is very low and there is no necessity for neutralizing the grid-plate capacitance. An interstage impedance, usually an inductance in series with the plate of the first stage and the cathode of the second stage, is often used at higher frequencies to provide a degree of impedance matching between the units. The cathode-drive portion of the circuit is matched to the input net-

work and provides most of the stage gain. Because the feedback path of the cathode-drive circuit is the plate-cathode capacitance, which in most cases is very small, excellent isolation is provided between the antenna and the local oscillator.

Development of single triodes having low grid-plate capacitance, such as the 6BN4A has made possible the design of neutralized triode rf circuits. Tubes such as the 6GK5 and 6CW4 are specially designed to minimize grid-plate capacitance to permit easier neutralization of a grounded-cathode circuit over the wide frequency band. Bridge-neutralized rf-amplifier stages are widely used in television tuners; in this arrangement, a portion of the output signal is returned to the grid out of phase with the feedback signal from the grid-plate capacitance. This circuit provides excellent gain and noise performance with stable operation across the band.

The **mixer** stage of a vhf tuner usually employs a pentode tube, or the pentode unit of a triode-pentode tube. Although triodes such as the 6J6A were used as mixers in early receivers, they have been replaced by pentodes because the higher output impedance of a pentode provides a higher mixer gain than can be obtained with a triode.

The amplified signal from the rf stage in Fig. 72 is applied to the mixer grid along with a local-oscillator signal of much larger amplitude. The local-oscillator signal varies the mixer grid voltage from cutoff into the grid-current region. This signal develops a grid-resistor bias, called the **injection voltage**, which is a measure of the local-oscillator voltage. Because the transfer curve of the mixer tube is nonlinear, mixing action between the rf signal and the local-oscillator signal produces sum and difference frequencies. The output circuit of the mixer is tuned to the difference frequency (about 44 MHz) and rejects all other frequencies. This signal is then fed to the intermediate-frequency amplifier.

The mixer gain is a function of the amplitude of the local-oscillator

signal. The gain has a broad maximum over a range of injection voltages from  $-2.5$  to  $-5.0$  volts for conventional-grid mixers and slightly lower for frame-grid mixers. Good impedance matching between the rf-amplifier plate and the mixer grid, consistent with bandpass requirements, is important to achieve maximum signal power transfer. A slight amount of regeneration is provided by a small screen-grid inductance. This regeneration effectively increases the mixer-grid input impedance and thus improves power gain.

The **local-oscillator** stage shown in Fig. 72 is a Colpitts type in which the tuned circuit is located between the grid and plate and the feedback path is through the tube interelectrode capacitances. A large signal is developed in the local oscillator and coupled loosely to the mixer grid to minimize the effects of changes in the mixer input on the frequency of oscillation. The circuit is designed to keep frequency shift within a very narrow range with supply-voltage and temperature changes. Fine tuning is provided by a variable inductance or capacitance across the tuned circuit. Tubes commonly used in local-oscillator and mixer circuits are the 6EA8, 6KZ8, and 6KE8.

### *Television IF Amplifiers*

The intermediate-frequency (if) amplifier stages in a television receiver provide the additional gain required to bring the signal level to an amplitude suitable for final detection. A constant peak signal of about three to five volts is required at the input to the detector. The mixer output signal is passed through two or three stages of amplification to attain this level. High-transconductance pentodes having low grid-No.1-to-plate capacitances are normally used in if amplifiers. The coupling circuits are usually tuned transformers which may be single- or double-tuned. The transformers are either synchronously (same frequency) tuned or stagger-tuned, depending on circuit requirements. The over-all bandwidth varies from a maximum of 3.58 MHz at the 6-dB points for color receivers to

values in the order of 2.0 to 2.5 MHz for the most inexpensive receivers. An expression for the figure of merit for a single tuned if-amplifier tube is the gain-bandwidth product  $G \times B$ , which is given by

$$G \times B = \frac{g_m}{2\pi C}$$

where  $C$  is the total tuning capacitance. This relationship again demonstrates the need for high transconductance and low interelectrode capacitance.

The first stage (or first two stages in the case of a three-stage if) is gain-controlled like the rf amplifier. However, the bias applied to the if-amplifier tube varies the input resistance and capacitance of the tube and thus detunes the circuit. It is important for proper reception to maintain the frequency response of the if stages constant, particularly in the case of the color receiver. Therefore, a small unbypassed cathode resistor is used which provides degenerative feedback to minimize the effect of bias changes. In addition, the effects on input impedance caused by the grid-plate capacitance are reduced by use of a partial bypass capacitor at the screen grid to provide neutralization of the grid-to-plate capacitance.

Tubes used in the gain-controlled stages of the if amplifier have remote- or semiremote-cutoff characteristics to reduce cross-modulation or intermodulation interference. Tube types commonly used in this application include the 6BZ6, 6GM6, 6JH6, 6JD6A, and 6KT6.

The last if-amplifier stage is a relatively-large-signal amplifier. For this reason, the tube must be biased so that it will operate over a region of linear operation for large voltage excursions. Because such a quiescent operating point provides a transconductance somewhat below the maximum value for the tube, the selection of the operating point involves a compromise between signal-handling capacity and gain. For purposes of linearity, the final if-amplifier stage is not gain-controlled, and operates with the cathode bypassed to ground. Because fixed bias

is used, a sharp-cutoff tube is used to provide higher transconductance than could be obtained with an equivalent remote- or semiremote-cutoff tube. Examples of types used in this stage are the 6EW6 and 6JC6A.

### Wideband (Video) Amplifiers

In some applications, it is necessary for a circuit to amplify signals ranging from very low frequencies (several hertz) to high frequencies (tens of megahertz) with a minimum of frequency and time-delay distortion. For example, very exacting requirements are demanded for such applications as television camera chains, ac voltmeters, and vertical amplifiers for oscilloscopes. In response to these demands, circuit compensation techniques have been developed to minimize the amplitude and time-delay variation as the upper or lower frequency limits of the amplifier are approached.

The need for such compensation is evident when many identical stages of amplification are employed. If ten cascaded stages are used, a variation of 0.3 dB per stage results in a total variation of 3 dB. In an uncompensated amplifier, this total variation occurs two octaves (a frequency ratio of four) prior to the half-power point. Because two octaves are lost from both the high and low frequencies, the bandwidth of ten cascaded uncompensated amplifies stages is only one-sixteenth that of a single amplifier stage. Fig. 73 shows the amplitude response characteristics of various numbers of identical

uncompensated amplifiers.

In general, the output of an amplifier may be represented by a current generator  $i_{out}$  and a load resistance  $R_L$ , as shown in Fig. 74(a). Because the signal current is shunted by various capacitances at high frequencies, as shown in Fig. 74(b), there is a loss in gain at these frequencies. If an inductor  $L$  is placed in series with the load resistor  $R_L$ , as shown in Fig. 74(c), a low-Q circuit is formed which somewhat suppresses the capacitive loading. This method of gain compensation, called **shunt peaking**, can be effective for improving high-frequency response. Fig. 74 shows the frequency response for the circuits in Fig. 74(a), (b), and (c). If the inductor  $L$  in Fig. 74(c) is made **self-resonant** approximately one octave above the 3-dB frequency of the circuit of Fig. 74(b), the amplifier response is extended by about another 30 per cent.

If the stray capacitance  $C$  shown in Fig. 74(b) is broken into two parts  $C'$  and  $C''$  and an inductor  $L_1$  is placed between them, a heavily damped form of series resonance may be employed for further improvement. This form of compensation, called **series peaking**, is shown in Fig. 75(a). If  $C'$  and  $C''$  are within a factor of two of each other, series peaking produces an appreciable improvement in frequency response as compared to shunt peaking. A more complex form of compensation embodying both self-resonant shunt peaking and series peaking is shown in Fig. 75(b).

The effects of various high-fre-

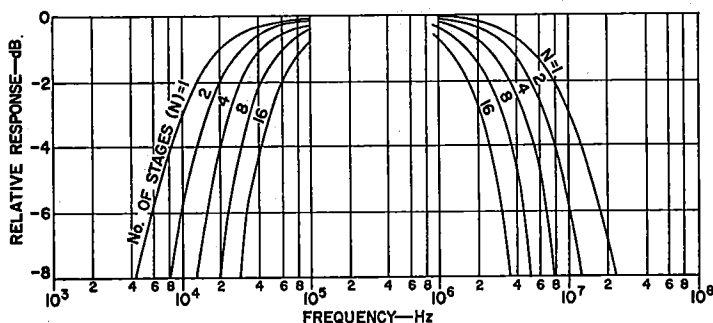


Fig. 73—Amplitude response characteristics of various numbers ( $N$ ) of identical uncompensated amplifiers.



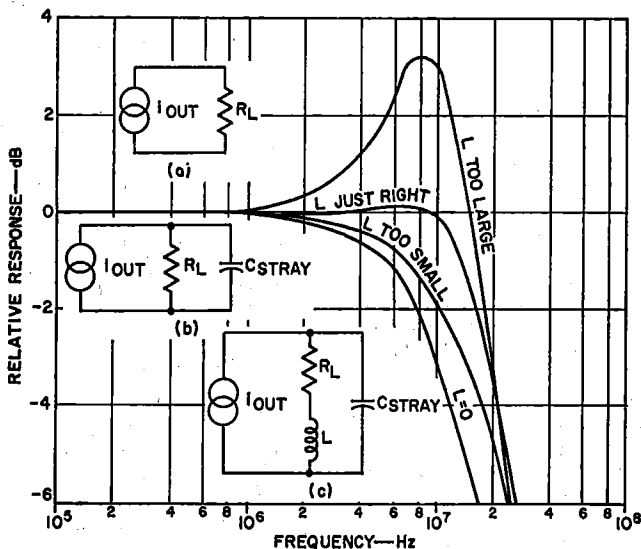


Fig. 74—Equivalent circuits and frequency response of uncompensated and shunt-peaked amplifiers.

quency compensation systems can be demonstrated by consideration of an amplifier consisting of three identical stages. If each of the three stages is down 3 dB at 1 MHz, and if a total gain variation of plus 1 dB and minus 3 dB is allowed, the bandwidth of the amplifier is 0.5 MHz without compensation. Shunt peaking raises the bandwidth to 1.3 MHz. Self-resonant shunt

width of approximately 2.8 MHz. If the capacitance is perfectly distributed, and if an infinitely complex network of shunt and series peaking is employed, the ultimate capability is about 4 MHz.

The frequency response of a wide-band amplifier is influenced greatly by variations in component values due to temperature effects, variation of tube parameters with voltage and current (normal large-signal excursions), changes of stray capacitance due to relocated lead wires, or other variations. A change of 20 per cent in any of the critical parameters can cause a change of 0.7 dB in gain per stage over the last half-octave of the response for the most simple case of shunt peaking. As the bandwidth is extended by more complex peaking, a circuit becomes substantially more critical. (Measurement probes generally alter circuit performance because of their capacitance; this effect should be considered during frequency-response measurements.)

In the design of wideband amplifiers using many stages of amplification, it is necessary to consider time-delay variations as well as amplitude variation. When feedback capacitance

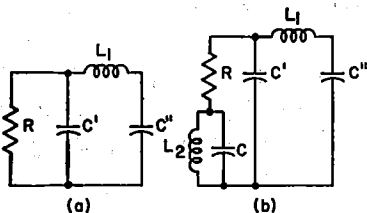


Fig. 75—Circuits using (a) series peaking, and (b) both self-resonant shunt peaking and series peaking.

peaking raises it to 1.5 MHz. An infinitely complicated network of shunt-peaking techniques could raise it to 2 MHz. If the distribution of capacitance permits it, series peaking alone can provide a bandwidth of about 2 MHz, while a combination of shunt and series peaking can provide a band-

is a major contributor to response limitation, the more complex compensating networks may produce severe ringing or even sustained oscillation. If feedback capacitance is treated as input capacitance produced by the Miller effect, the added input capacitance  $C_f'$  caused by the feedback capacitor  $C_f$  is given by

$$C_f' = C_f (1 - VG)$$

where  $VG$  is the input-to-output voltage gain. The gain  $VG$ , however, has a phase angle that varies with frequency. The phase angle is 180 degrees at low frequencies, but may lead or lag this value at high frequencies; the magnitude of  $VG$  then also varies. In the design of very wideband amplifiers (20 MHz or more), the phase of the transconductance  $g_m$  must be considered.

The **video amplifier** stage in a television receiver usually employs a pentode-type tube specially designed to amplify the wide band of frequencies contained in the video signal and, at the same time, to provide high gain per stage. Pentodes are more useful than triodes in such stages because they have high transconductance (to provide high gain) together with low input and output interelectrode capacitances (to permit the broadband requirements to be satisfied). An approximate "figure of merit" for a particular tube for this application can be determined from the ratio of its transconductance,  $g_m$ , to the sum of its input and output capacitances,  $C_{in}$  and  $C_{out}$ , as follows:

$$\text{Figure of Merit} = \frac{g_m}{C_{in} + C_{out}}$$

Typical values for this figure are in the order of  $500 \times 10^6$  or greater.

A typical video amplifier stage, such as that shown in Fig. 76, is connected between the second detector of the television receiver and the picture tube. The contrast control,  $R_1$ , in this circuit controls the gain of the video amplifier tube. The inductance,  $L_2$ , in series with the load resistor,  $R_L$ , maintains the plate load impedance at a relatively constant value with increasing

frequency. The inductance  $L_1$  isolates the output capacitance of the tube so that only stray capacitance is placed

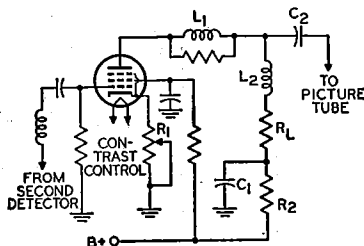


Fig. 76—Typical video amplifier stage.

across the load. As a result, a higher-value load resistor is used to provide higher gain without affecting frequency response or phase relations. The decoupling circuit,  $C_1R_2$ , is used to improve the low-frequency response. Tubes used as video amplifiers include types 6CL6 and 12BY7A, or the pentode sections of types 6AW8A and 6AN8A.

The **luminance amplifier** in a color-television receiver is a conventional video amplifier having a bandwidth of approximately 3.5 MHz. In a color receiver, the portion of the output of the second detector which lies within the frequency band from approximately 2.4 to 4.5 MHz is fed to a bandpass amplifier, as shown in the block diagram in Fig. 77. The color

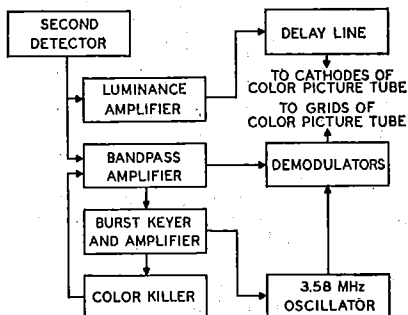


Fig. 77—Block diagram of video-amplifier section of color television receiver.

synchronizing signal, or "burst," contained in this signal may then be fed to a "burst-keyer" tube. At the same

time, a delayed horizontal pulse may be applied to the keyer tube. The output of the keyer tube is applied to the burst amplifier tube and the signal is then fed to the 3.58-MHz oscillator and to the "color-killer" stage.

The color killer applies a bias voltage to the bandpass amplifier in the absence of burst so that the color section, or **chrominance** channel, of the receiver remains inoperative during black-and-white broadcasts. A threshold control varies the bias and controls the burst level at which the killer stage operates.

The output of the 3.58-MHz oscillator and the output of the bandpass amplifier are fed into phase and amplitude demodulator circuits. The output of each demodulator circuit is an electrical representation of a color-difference signal, *i.e.*, an actual color signal minus the black-and-white, or luminance, signal. The two color-difference signals are combined to produce the third color-difference signal; each of the three signals then represents one of the primary colors.

The three color-difference signals are usually applied to the grids of the three electron guns of the color picture tube, in which case the black-and-white signal from the luminance amplifier may be applied simultaneously to the cathodes. The chrominance and luminance signals then combine to produce the color picture. In the absence of transmitted color information, the chrominance channel is cut off by the color killer, as described above, and only the luminance signal is applied to the picture tube, producing a black-and-white picture.

### TV Scanning, Sync, and Deflection

For reproduction of a transmitted picture in a television receiver, the

face of a cathode-ray tube is scanned with an electron beam while the intensity of the beam is varied to control the emitted light at the phosphor screen. The scanning is synchronized with a scanned image at the TV transmitter, and the black-through-white picture areas of the scanned image are converted into an electrical signal that controls the intensity of the electron beam in the picture tube at the receiver.

#### Scanning Fundamentals

The scanning procedure used in the United States employs horizontal linear scanning in an odd-line interlaced pattern. The standard scanning pattern for television systems includes a total of 525 horizontal scanning lines in a rectangular frame having an aspect ratio of 4 to 3. The frames are repeated at a rate of 30 per second, with two fields interlaced in each frame. The first field in each frame consists of all odd-number scanning lines, and the second field in each frame consists of all even-number scanning lines. The field repetition rate is thus 60 per second, and the vertical scanning rate is 60 Hz.

The geometry of the standard odd-line interlaced scanning pattern is illustrated in Fig. 78. The scanning beam starts at the upper left corner of the frame at point A, and sweeps across the frame with uniform velocity to cover all the picture elements in one horizontal line. At the end of each trace, the beam is rapidly returned to the left side of the frame, as shown by the dashed line, to begin the next horizontal line. The horizontal lines slope downward in the direction of scanning because the vertical deflecting signal simultaneously produces a verti-

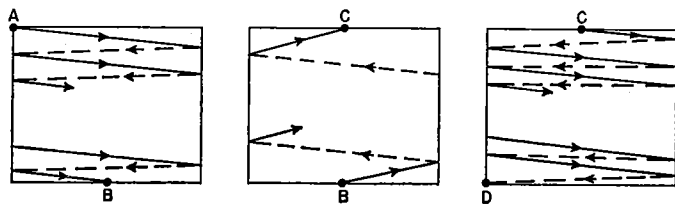


Fig. 78—The odd-line interlaced scanning procedure.

cal scanning motion, which is very slow compared with the horizontal scanning speed. The slope of the horizontal line trace from left to right is greater than the slope of the retrace from right to left because the shorter time of the retrace does not allow as much time for vertical deflection of the beam. Thus, the beam is continuously and slowly deflected downward as it scans the horizontal lines, and its position is successively lower as the horizontal scanning proceeds.

At the bottom of the field, the vertical retrace begins, and the beam is brought back to the top of the frame to begin the second or even-number field. The vertical "flyback" time is very fast compared to the trace, but is slow compared to the horizontal scanning speed; therefore, some horizontal lines are produced during the vertical flyback.

All odd-number fields begin at point A in Fig. 78 and are the same. All even-number fields begin at point C and are the same. Because the beginning of the even-field scanning at C is on the same horizontal level as A, with a separation of one-half line, and the slope of all lines is the same, the even-number lines in the even fields fall exactly between the odd-number lines in the odd field.

### Sync

In addition to picture information, the composite video signal from the video detector of a television receiver contains timing pulses to assure that the picture is produced on the faceplate of the picture tube at the right instant and in the right location. These pulses, which are called sync pulses,

control the horizontal and vertical scanning generators of the receiver.

Fig. 79 shows a portion of the detected video signal. When the picture is bright, the amplitude of the signal is low. Successively deeper grays are represented by higher amplitudes until, at the "blanking level" shown in the diagram, the amplitude represents a complete absence of light. This "black level" is held constant at a value equal to 75 per cent of the maximum amplitude of the signal during transmission. The remaining 25 per cent of the signal amplitude is used for synchronization information. Portions of the signal in this region (above the black level) cannot produce light.

In the transmission of a television picture, the camera becomes inactive at the conclusion of each horizontal line and no picture information is transmitted while the scanning beam is retracing to the beginning of the next line. The scanning beam of the receiver is maintained at the black level during this retrace interval by means of the blanking pulse shown in Fig. 79. Immediately after the beginning of the blanking period, the signal amplitude rises further above the black level to provide a horizontal-synchronization pulse that initiates the action of the horizontal scanning generator. When the bottom line of the picture is reached, a similar vertical-synchronization pulse initiates the action of the vertical scanning generator to move the scanning spot back to the top of the pattern.

The sync pulses in the composite video signal may be separated from the video information in the output of the second or video detector by means of

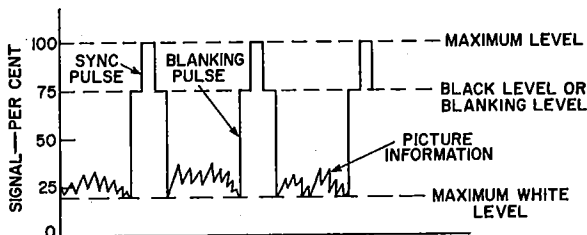


Fig. 79—Detected video signal.

the triode circuit shown in Fig. 80. In this circuit, the time constant of the network  $R_1C_1$  is long with respect to the interval between pulses. During each pulse, the grid is driven positive and draws current, thereby charging capacitor  $C_1$ . Consequently, the grid develops a bias which is slightly greater

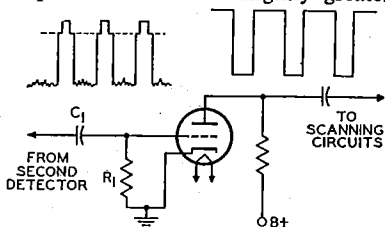


Fig. 80—Sync-separator circuit.

than the cutoff voltage of the tube. Because plate current flows only during the sync-pulse period, only the amplified pulse appears in the output. This **sync-separator** stage discriminates against the video information. Because the bias developed on the grid is proportional to the strength of the incoming signal, the circuit also has the advantage of being relatively independent of signal fluctuations.

After the synchronizing signals are separated from the composite video signal, it is necessary to filter out the horizontal and vertical sync signals so that each can be applied to its respective deflection generator. This filtering is accomplished by RC circuits designed to filter out all but the desired synchronizing signals. Although the horizontal, vertical, and equalizing pulses are all rectangular pulses of the same amplitude, they differ in frequency and pulse width, as shown in Fig. 81. The horizontal sync pulses have a repetition rate of 15,750 per second (one for

each horizontal line) and a pulse width of 5.1 microseconds. The equalizing pulses have a width approximately half the horizontal pulse width, and a repetition rate of 31,500 per second; they occur at half-line intervals, with six pulses immediately preceding and six following the vertical synchronizing pulse. The vertical pulse is repeated at a rate of 60 per second (one for each field), and has a width of approximately 190 microseconds. The serrations in the vertical pulse occur at half-line intervals, dividing the complete pulse into six individual pulses that provide horizontal synchronization during the vertical retrace. (Although the picture is blanked out during the vertical retrace time, it is necessary to keep the horizontal scanning generator synchronized.)

All the pulses described above are produced at the transmitter by the synchronizing-pulse generator; their waveshapes and spacings are held within very close tolerances to provide the required synchronization of receiver and transmitter scanning.

The horizontal sync signals are separated from the total sync in a differentiating circuit that has a short time constant compared to the width of the horizontal pulses. When the total sync signal is applied to the differentiating circuit shown in Fig. 82, the capacitor charges completely very soon after the leading edge of each pulse, and remains charged for a period of time equal to practically the entire pulse width. When the applied voltage is removed at the time corresponding to the trailing edge of each pulse, the capacitor discharges completely within a very short time. As a result, a positive peak of voltage is obtained for

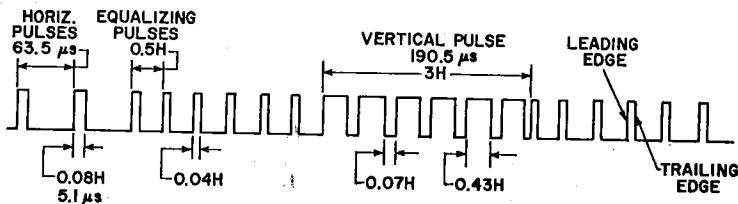


Fig. 81—Waveform of TV synchronizing pulses ( $H$  = horizontal line period of  $1/15,750$  seconds, or  $63.5 \mu\text{s}$ ).

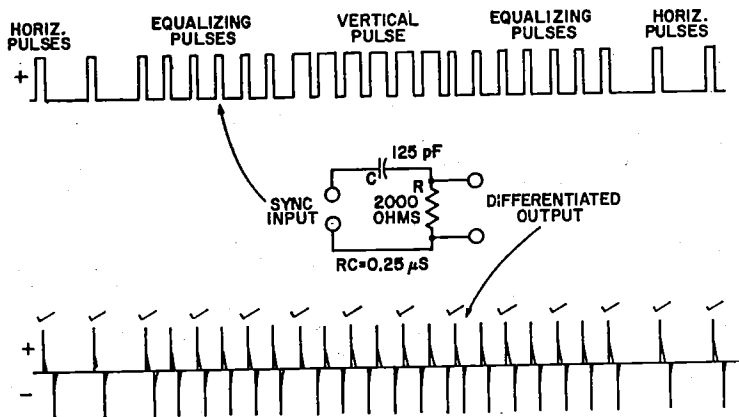


Fig. 82—Separation of the horizontal sync signals from the total sync by a differentiating circuit.

each leading edge and a negative peak for the trailing edge of every pulse. One polarity is produced by the charging current for the leading edge of the applied pulse, and the opposite polarity is obtained from the discharge current corresponding to the trailing edge of the pulse.

As mentioned above, the serrations in the vertical pulse are inserted to provide the differentiated output needed to synchronize the horizontal scanning generator during the time of vertical synchronization. During the vertical blanking period, many more voltage peaks are available than are necessary for horizontal synchronization (only one pulse is used for each horizontal line period). The check marks above the differentiated output in Fig. 82 indicate the voltage peaks used to synchronize the horizontal deflection generator for one field. Because the sync system is made sensitive only to positive pulses occurring at approximately the right horizontal timing, the negative sync pulses and alternate differentiated positive pulses produced by the equalizing pulses and the serrated vertical information have no effect on horizontal timing. It can be seen that although the total sync signal (including vertical synchronizing information) is applied to the circuit of Fig. 82, only horizontal synchronization information appears at the output.

The vertical sync signal is separated from the total sync in an integrating circuit which has a time constant that is long compared with the duration of the 5-microsecond horizontal pulses, but short compared with the 190-microsecond vertical pulse width. Fig. 83 shows the general circuit configuration

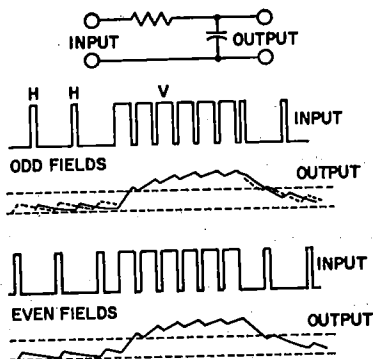


Fig. 83—Separation of vertical sync signals from the total sync for odd and even fields with no equalizing pulses. (Dashed line indicates triggering level for vertical scanning generator.)

used, together with the input and output signals for both odd and even fields. The period between horizontal pulses, when no voltage is applied to the RC circuit, is so much longer than the horizontal pulse width that the capacitor has time to discharge almost down to

zero. When the vertical pulse is applied, however, the integrated voltage across the capacitor builds up to the value required for triggering the vertical scanning generator. This integrated voltage across the capacitor reaches its maximum amplitude at the end of the vertical pulse, and then declines practically to zero, producing a pulse of the triangular wave shape shown for the complete vertical synchronizing pulse. Although the total sync signal (including horizontal information) is applied to the circuit of Fig. 83, therefore, only vertical synchronization information appears at the output.

The vertical synchronizing pulses are repeated in the total sync signal at the field frequency of 60 per second. Therefore, the integrated output voltage across the capacitor of the RC circuit of Fig. 83 can be coupled to the vertical scanning generator to provide vertical synchronization. The six equalizing pulses immediately preceding and following the vertical pulse improve the accuracy of the vertical synchronization for better interlacing. The equalizing pulses that precede the vertical pulses make the average value of applied voltage more nearly the same for even and odd fields, so that the integrated voltage across the capacitor adjusts to practically equal values for the two fields before the vertical pulse begins. The equalizing pulses that follow the vertical pulse minimize any

difference in the trailing edge of the vertical synchronizing signal for even and odd fields.

In fringe areas, two conditions complicate the process of sync separation. First, the incoming signal available at the antenna is weak and susceptible to fading and other variations; second, the receiver is operating at or near maximum gain, which makes it extremely susceptible to interference from pulse-type noise generated by certain types of electrical equipment, ignition systems, switches, or the like. Some type of **noise-immunity** provision is almost essential for acceptable performance. Noise may be reduced or eliminated from the sync and agc circuits by gating or by a combination of gating, inversion, and cancellation. An example, of the latter method is shown in Fig. 84. In this circuit the 6GY6, which has two independent control grids, serves the dual function of agc amplifier and noise inverter. Because the sync tips of the video signal at grid No. 1 of the 6GY6 drive the tube near its cutoff region, any noise signal extending above the tip level will appear inverted across the grid-No.2 load resistor R. This inverted noise signal is re-combined with the video signal and fed to the sync separator at point "A" in Fig. 84, where noise cancellation takes place. This process leaves the sync pulses relatively free of disturbing noise and results in a stable picture.

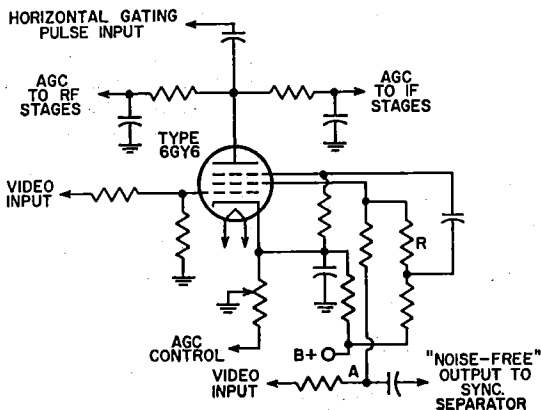


Fig. 84—Typical noise-cancellation circuit.

To prevent reduction of receiver gain due to the effect of noise on the agc amplifier, a portion of the inverted noise signal is fed to the second control grid, grid No.3, of the 6GY6 to cut off or gate the agc amplifier when a noise pulse occurs.

### Horizontal Deflection

In the horizontal-deflection stages of a television receiver, a current that varies linearly with time and has a sufficient peak-to-peak amplitude must be passed through the horizontal-deflection-yoke winding to develop a magnetic field adequate to deflect the electron beam of the television picture tube. (This type of deflection is different from that used in a cathode-ray oscilloscope, where the beam is deflected electrostatically.) After the beam is deflected completely across the face of the picture tube, it must be returned very quickly to its starting point. (As explained previously, the beam is extinguished during this retrace by the blanking pulse incorporated in the composite video signal, or in some cases by additional external blanking derived from the horizontal-deflection system.)

The simplest form of a deflection circuit is shown in Fig. 85. In this circuit, the yoke impedance  $L$  is assumed to be a perfect inductor. When the




Fig. 85—Simplest form of deflection circuit.

switch is closed, the yoke current starts from zero and increases linearly. At any time  $t$ , the current  $i$  is equal to  $Et/L$ , where  $E$  is the applied voltage. When the switch is opened at a later time  $t_1$ , the current instantly drops from a value of  $Et_1/L$  to zero.

Although the basic circuit of Fig. 85 crudely approaches the requirements for deflection, it presents some obvious problems and limitations. The voltage across the switch becomes extremely

high, theoretically approaching infinity. In addition, if very little of the total time is spent at zero current, the circuit would require a tremendous amount of dc power. Furthermore, the operation of the switch would be rather critical with regard to both its opening and its closing. Finally, because the deflection field would be phased in only one direction, the beam would have to be centered at the extreme left of the screen for zero yoke current.

If a capacitor is placed across the switch, as shown in Fig. 86, the yoke


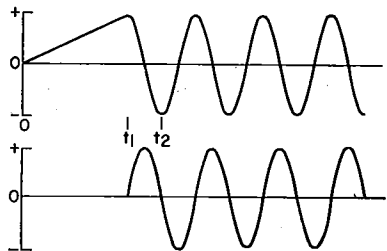


Fig. 86—Addition of capacitor to permit flyback ringing, and yoke-current (upper) and switch-voltage (lower) waveforms.

current still increases linearly when the switch is closed at time  $t = 0$ . However, when the switch is opened at time  $t = t_1$ , a tuned circuit is formed by the parallel combination of  $L$  and  $C$ . The resulting yoke currents and switch voltages are then as shown in Fig. 86. The current is at a maximum when the voltage equals zero, and the voltage is at a maximum when the current equals zero. If it is assumed that there are no losses, the ringing frequency  $f_{osc}$  is equal to  $1/(2\pi\sqrt{LC})$ .

If the switch is closed again at any time the capacitor voltage is not equal to zero, an infinite switch current flows as a result of the capacitive discharge. However, if the switch is closed at the precise moment  $t_2$  that the capacitor voltage equals zero, the capacitor cur-



rent effortlessly transfers to the switch, and a new transient condition results. Fig. 87 shows the yoke-current and switch-voltage waveforms for this new condition.

If the switch is again opened at  $t_1$ , closed at  $t_2$ , and so on, the desired

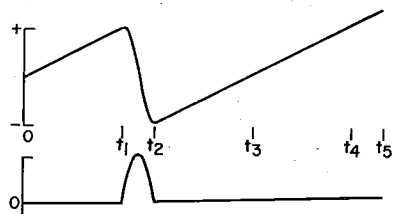


Fig. 87—Yoke-current (upper) and switch-voltage (lower) waveforms when switch is closed at  $t_2$ .

sweep results, the peak switch voltage is finite, and the average supply current is zero. The deflection system is then lossless and efficient and, because the average yoke current is zero, beam decentering is avoided. The only fault of the circuit of Fig. 86 is the critical timing of the switch, particularly at time  $t = t_2$ . However, if the switch is shunted by a damper diode, as shown in Fig. 88, the diode acts as a closed switch as soon as the capacitor voltage reverses slightly. The switch may then be closed at any time between  $t_2$  and  $t_4$ .




Fig. 88—Incorporation of damper diode.

Fig. 89 shows a typical horizontal-output-and-deflection circuit used in television receivers. In addition to supplying the deflection energy required for horizontal deflection of the picture-tube beam, this circuit provides the high dc voltage required for the ultor (anode) of the picture tube and the "boosted" B voltage for other portions of the receiver. The horizontal-output tube is usually a beam power tube such as the 6JB6A, 6JG6A, or 6LQ6/6JE6C.

In this circuit, a sawtooth voltage from the horizontal-oscillator tube is applied to the grid No. 1 of the horizontal-output tube. When this voltage rises above the cutoff point of the output tube, the tube conducts a sawtooth of plate current which is fed through the auto-transformer to the horizontal-deflecting yoke. At the end of the horizontal-scanning cycle, which lasts for 63.4 microseconds, the sawtooth voltage on the grid suddenly cuts off the output tube. This sudden change sets up an oscillation of about 50 to 70 kHz in the output circuit, which may be considered as an inductor shunted by the stray capacitance of the circuit. During the first half of this oscillation, a positive voltage appears across the transformer. In the

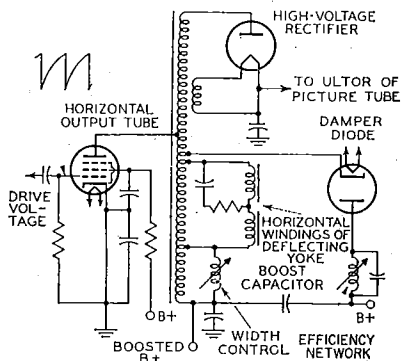


Fig. 89—Typical horizontal-deflection and high-voltage circuit.

second half of the cycle, the voltage swings below the plate supply voltage, and the damper diode conducts, damping out the oscillation. At the same time, the current through the deflecting yoke reverses and reaches its negative peak. As the damper-diode current decays to zero, the output tube begins to conduct again. The yoke current, therefore, is composed of current resulting from damper-diode conduction followed by output-tube conduction.

When the output tube is suddenly cut off, the high-voltage pulse produced is increased by means of an extra winding on the transformer. This high-voltage pulse charges a high-voltage capacitor through the high-voltage rec-

tifier. The output of this circuit is the dc high-voltage supply for the picture tube. The high-voltage rectifier also obtains its filament power through a separate winding on the horizontal-output transformer.

Current flowing through the damper diode charges the "boost" capacitor through the damper portion of the transformer winding. The polarity of the charge on the capacitor is such that the voltage at the low end of the winding is increased above the plate supply voltage, or B+. This higher voltage or "boost" is used for the output-tube plate supply, and may also supply the deflection oscillators and other low-current-drain circuits in the receiver.

### Vertical Deflection

The vertical-deflection circuit in a television receiver is essentially a class A audio amplifier with a complex load line, severe low-frequency requirements (much lower than 60 Hz), and a need for controlled linearity. The equivalent low-frequency response for a 10-percent deviation from linearity is 1 Hz.

The required performance can be obtained in a vertical-deflection circuit in any of three ways. The amplifier may be designed to provide a flat response down to 1 Hz. This design, however, requires an extremely large output transformer and immense capacitors. Another arrangement is to design the amplifier for fairly good low-frequency response and predistort the generated signal.

The third method is to provide extra gain so that feedback techniques can be used to provide linearity. If loop feedback of 20 or 30 dB is used, tube gain variations and nonlinearities become fairly insignificant. The feedback automatically provides the necessary "predistortion" to correct low-frequency limitations. In addition, the coupling of miscellaneous signals (such as power-supply hum or horizontal-deflection signals) in the amplifying loop is suppressed.

A modified multivibrator in which the vertical-output tube is part of the oscillator circuit is used in the vertical-deflection stage of many television receivers. This stage supplies the deflection energy required for vertical deflection of the picture-tube beam. A simplified combined vertical-oscillator-output stage is shown in Fig. 90. Wave-shapes at critical points of the circuit are included to illustrate the development of the desired current through the vertical-output transformer and deflecting yoke.

The current waveform through the deflecting yoke and output transformer should be a sawtooth to provide the desired deflection. The grid and plate voltage waveforms of the output tube could also be sawtooth except for the effect of the inductive components in the yoke and transformer. The effect of these inductive components must be taken into consideration, however, particularly during retrace. The fast rate of current change during retrace time (which is approximately 1/15 as long as trace

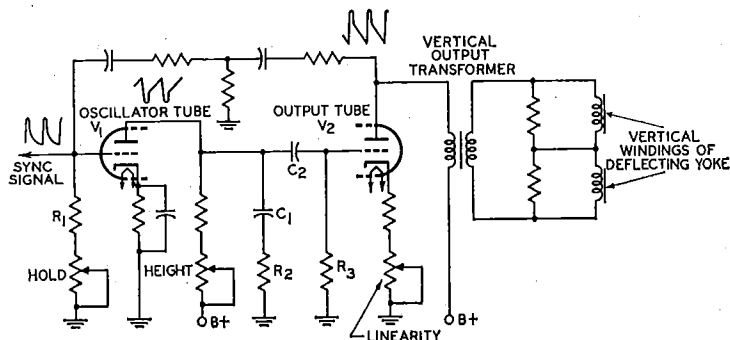


Fig. 90—Simplified combined vertical-oscillator-and-output stage.

time) causes a high-voltage pulse at the plate which could give a trapezoidal waveshape to the plate voltage and cause increased plate current, excess damping, and lengthened retrace time. However, the grid voltage is made sufficiently negative during retrace to keep the tube close to cutoff, as described below.

The frequency, and the relative deviation of the positive and negative portions of each cycle, are dependent on the values of resistors  $R_1$  and  $R_2$  and the RC combination  $R_1C_1$ , as explained in the section on multivibrators. The desired trapezoidal waveshape at the grid of  $V_2$  is created by capacitor  $C_1$  and resistor  $R_2$ . If  $R_2$  were equal to zero,  $C_1$  would cause the grid-voltage waveshape to take the form shown in Fig. 91(a). When  $R_2$  is sufficiently large,  $C_1$  does not discharge completely when  $V_1$  conducts. When  $V_1$  is cut off, therefore, the voltage on the grid of  $V_2$  immediately rises to the voltage across  $C_1$ . The resulting waveshape is shown in Fig. 91(b). The negative-going pulse of the grid-voltage waveshape prevents the high plate pulse from causing excess conduction, and thereby prevents overdamping.

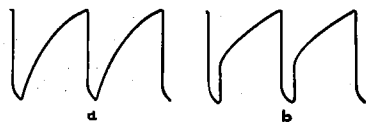


Fig. 91—Waveforms showing effect of  $R_2$  in Fig. 90.

This vertical-deflection stage utilizes twin-triode tubes such as the 6DR7 and 6GF7A. The 6GF7A is particularly suitable for this application because it incorporates dissimilar units to provide for the different operating requirements of the oscillator and output sections.

### High-Voltage Regulation

In color television receivers, it is very important to regulate the high-voltage supply for the picture tube. Poor regulation of the high voltage can adversely affect the performance of the focusing and convergence circuits so that picture blooming results. In addi-

tion, excessive voltage or current may be applied to the high-voltage rectifier, horizontal-output tube, and horizontal-output (flyback) transformer so that the useful life of these components is substantially shortened. In modern color television receivers, regulation of the high voltage is accomplished by use of a shunt-type electronic voltage regulator connected across the output of the high-voltage power supply or by use of a pulse-type regulator connected in shunt with the flyback transformer.

**Shunt Regulator Circuit**—Fig. 92 shows the schematic diagram of a typical shunt regulator circuit. This circuit uses a 6BK4C/6EL4 or 6EN4 sharp-cutoff beam triode for the regulator tube and is suitable for regulation of the output of a high-voltage, high-impedance supply. The cathode of the regulator beam triode is held at a fixed positive potential with respect to ground. Because the grid potential is kept slightly less positive by the voltage drop across resistor  $R_2$ , the tube operates in the negative grid region and no grid current is drawn.

When the output voltage,  $e_o$ , rises as a result of a decrease in load current,

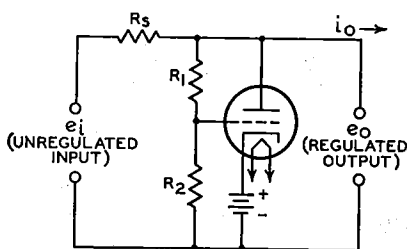


Fig. 92—High-voltage regulator circuit for color television.

a small fraction of the additional voltage is applied to the grid of the tube by the voltage-divider circuit consisting of  $R_1$  and  $R_2$ . This increased grid voltage causes the tube to draw an increased current from the unregulated supply. The increased current, in turn, causes a voltage drop across the high internal impedance of the unregulated supply,  $R_s$ , which tends to counteract the original rise of the voltage. If desired, the

grid may be connected to a variable point on the voltage divider to allow some adjustment of the output-voltage level.

The grid voltage for the regulator can also be obtained from a tap on the B-boost voltage supply. The use of this lower voltage (about 375 volts) eliminates the need for costly and troublesome high-voltage resistors. In this arrangement, variations in high voltage also vary the tapped-down B-boost voltage at the regulator grid, and the resulting variations in conduction of the regulator increase or decrease the loading of the high-voltage supply so that the total load remains nearly constant.

The shunt regulator circuit, in effect, presents a variable load impedance to the output of the high-voltage rectifier. Because the regulator is connected directly across the output of the rectifier, the regulator tube is required to handle the full amount of the high voltage (approximately 25 kilovolts) applied to the picture tube. The tube area, therefore, must be well shielded to provide adequate X-ray protection, and a relatively large area is required for voltage insulation. In addition, the high-voltage rectifier is required to conduct full-load current continuously. The shunt regulator maintains a constant high voltage by sensing changes in the B Boost voltage, which are indicative of changes in beam current, and increasing or decreasing conduction accordingly.

**Pulse Regulator Circuit**—In a pulse-regulator system, the regulator circuit is effectively shunted across part of the horizontal winding of the horizontal-output transformer. During operation, the pulse-regulator circuit maintains a substantially constant pulse amplitude in the primary winding of the horizontal-output transformer with changing loads on the high-voltage power supply. A constant-amplitude, stepped-up pulse is then applied to the high-voltage rectifier tube, and the high voltage developed from this pulse is maintained at a constant value. In the pulse-regulator system, regulator control is achieved by sampling the picture-

tube current by means of a special winding on the fly-back transformer and use of the resultant voltage drop (across a resistor) to control the grid circuit of the regulator tube.

Fig. 93 shows the schematic diagram and significant waveforms for a circuit that uses a 17KV6A beam-power pentode for the regulator tube. During trace and retrace, the cathode of the 17KV6A is held at B+. During the trace period, the screen grid of the 17KV6A is biased well below the cathode voltage and is unaffected by the beam current drawn by the picture tube. The control-grid bias is determined by the resistive voltage-divider network  $R_2$ ,  $R_3$ ,  $R_4$ , and  $R_5$  and is directly dependent on the beam current of the picture tube. The damper tube conducts during the trace period and holds the plate potential of the 17KV6A at B+. With the plate-to-cathode potential at zero and the screen grid negative with respect to the cathode, the regulator tube is completely cut off during the trace period. At the start of the retrace period, however, the damper tube becomes reverse-biased, and the voltage on the plate of the regulator tube begins to rise. This increasing voltage is coupled to the screen grid through  $C_1$  and  $R_1$  and to the control grid through the interelectrode capacitance of the tube.

The waveforms in Fig. 93 show that at the start of retrace the plate and screen grid of the 17KV6A have both been driven positive with respect to the cathode and the control grid has become less negative with respect to the cathode. The regulator tube then begins to conduct. The pulses impressed on the screen and control grids are short in duration so that the screen grid remains positive with respect to the cathode and the control grid remains near cathode potential for only a short time. The regulator tube is driven into conduction for approximately 2 to 4 microseconds at the start of retrace and is then cut off. As the beam current increases or decreases, the voltage developed across the re-

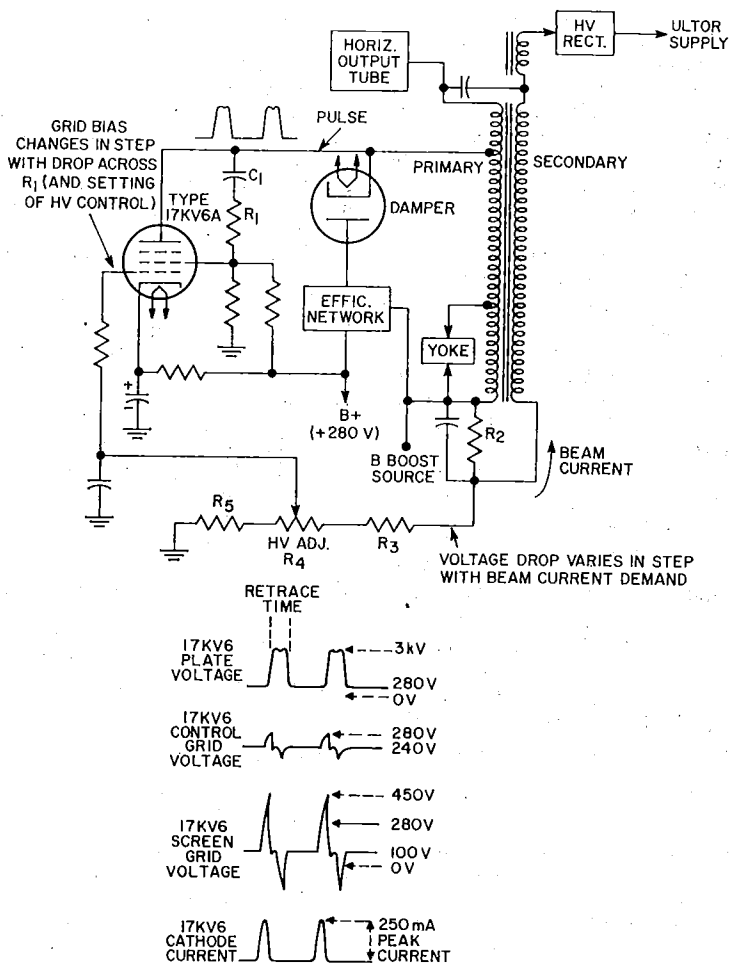


Fig. 93—Schematic diagram and significant waveforms for a typical pulse-regulator circuit.

sistive voltage-divider network  $R_2$ ,  $R_3$ ,  $R_4$ , and  $R_5$  tracks these changes and is applied to the control grid of the regulator tube. In this way, the conduction of the regulator tube is increased or decreased as required to maintain a constant high-voltage output. By re-

moval of the energy from the rising edge of the flyback pulse in this fashion, the height of the pulse used to develop the high voltage is controlled. At the same time interference with the shape of the deflection pulse is held to a minimum.

### Color Demodulation

In the transmission of picture signals for color-television receivers, all the color information is contained in three signals, a luminance (black-and-white) or monochrome signal and two chrominance signals. The luminance signal, which is called the Y signal, contains brightness information only. The voltage response of the Y signal is made similar to the brightness response of the human eye by use of a composite signal that contains definite proportions of the red, green, and blue signals from the color-television camera (30 per cent red, 59 per cent green, and 11 per cent blue). This Y signal, which includes sync and blanking pulses, provides a correct monochrome picture in a conventional black-and-white television receiver.

For the generation of color-television signals, the Y signal is subtracted from the red, green, and blue signals to provide a new set of color-difference signals, which are designated as R-Y, B-Y, and G-Y. All of the original picture information is contained in the Y signal, the R-Y signal, and the B-Y signal. Therefore, the G-Y signal is not contained in the transmitted signal, but is synthesized in the receiver by proper combination of the R-Y and B-Y signals.

(Color signals transmitted under present color-television standards are not R-Y and B-Y, but a similar pair of signals designated as I and Q. In the color-television receiver, R-Y and B-Y signals are demodulated directly from the I and Q signals with negligible loss

of color quality. For purposes of simplicity, only R-Y and B-Y signals are considered in this explanation. In addition, a 90-degree phase-shift network is shown; the phase-shift angle could be, and often is, some other value.)

Because the luminance signal and the two color-difference signals must be transmitted with a standard 6-MHz channel, the two color signals are combined into one signal at the transmitter and are independently recovered at the receiver by proper detection techniques. A color subcarrier of approximately 3.58 MHz is used for transmitting the color information within the 6-MHz spectrum of the television station. As shown in Fig. 94, the 3.58-MHz subcarrier and one of the color-difference signals are applied directly to a balanced AM modulator. The other color-difference signal is applied directly to a second balanced AM modulator, and the 3.58-MHz subcarrier is applied to this second modulator through a 90-degree phase-shifting network. The balanced modulators effectively cancel both the individual color-difference signals and the subcarrier signal, and the output contains only the sidebands of the combined chrominance signal.

Recovery of the color information at the receiver involves a process called **synchronous detection**. In this process, two separate detectors are used to recover the separate color information, just as two separate modulators were used to combine the information at the transmitter. The 3.58-MHz subcarrier, which was suppressed during transmission, must be reinserted at the receiver for recovery of the color information.

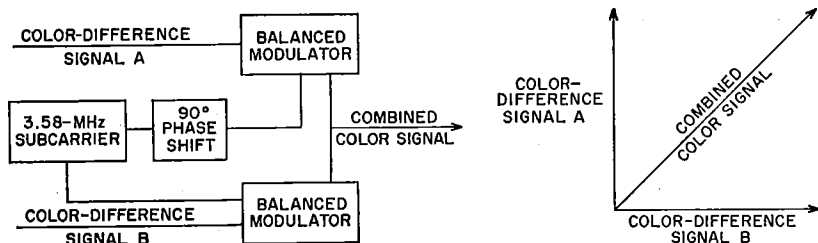


Fig. 94—Formation of combined color signal for transmission.

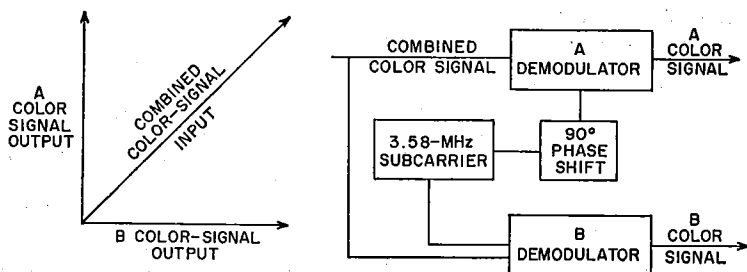


Fig. 95—Separation of combined color signal into two signals at the receiver.

The basis of synchronous detection is the phase relationship of this reinserted 3.58-MHz subcarrier.

For example, the original color information is represented in Fig. 94 by the color-difference signals A and B. At the receiver, the combined color signal is fed to two demodulators A and B, as shown in Fig. 95. At the same time, a 3.58-MHz subcarrier is also fed to the two demodulators, with the same phase relationship that was used in the modulators at the transmitter. This locally generated subcarrier essentially duplicates or replaces the original subcarrier, which was removed at the transmitter.

The local 3.58-MHz oscillator in the color-television receiver is made to function at the proper frequency and phase by means of a synchronizing signal sent out by the transmitter. This synchronizing signal consists of a short burst of 3.58-MHz signals transmitted during the horizontal blanking interval, immediately after the horizontal sync pulse, as shown in Fig. 96.

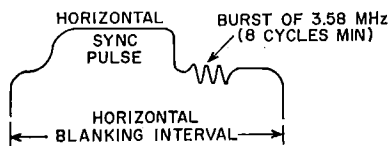


Fig. 96—Waveform for synchronizing signal.

Fig. 97 shows a simplified diagram of a low-level color demodulator fre-

quently used in color-television receivers. The locally generated 3.58-MHz signal is applied to the grid No. 3 of the pentode. The transmitted color signal containing the 3.58-MHz sidebands is applied to grid No. 1. The phase of the 3.58-MHz color signal constantly changes in accordance with its color content. For example, the following table shows six variations in color (hue) as a function of subcarrier phase:

| Subcarrier Phase-degrees<br>(with respect to 3.58-MHz<br>local signal in phase with burst) | Hue     |
|--|---------|
| 13   | Yellow  |
| 77   | Red     |
| 119  | Magenta |
| 193  | Blue    |
| 257  | Cyan    |
| 299  | Green   |

The basic operating principle of the color demodulator shown in Fig. 97 is that plate current from the pentode is zero (or quite low) unless both grid No. 1 and grid No. 3 are simultaneously positive. For example, when the signals applied to the two grids are in phase, plate current can be expected to flow for 180 degrees of each ac cycle. Conversely, when the signals are 180 degrees out of phase, plate current is cut off. The output signal from the detector, therefore, is a function of the phase relationship between the transmitted color signal and the locally generated subcarrier.

In a typical color-television receiver, two color demodulators of the

type shown in Fig. 97 are required. In one demodulator, the 3.58-MHz subcarrier signal is applied directly to the pentode grid No. 3 from the local "burst" oscillator. In the other demodulator, the 3.58-MHz signal from the

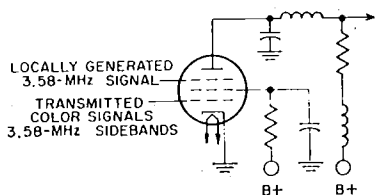


Fig. 97—Low-level color demodulator.

burst oscillator is shifted 90 degrees in phase before it is applied to the pentode grid No. 3. As shown previously in Fig. 95, the demodulator B produces R-Y signals. These B-Y and R-Y signals are then combined (matrixed) to produce the G-Y signal, as discussed earlier. The complete luminance signal is then amplified to the required level in a conventional video-amplifier circuit.

In some color-television receivers, the demodulators are designed so that the color output signals can be applied directly to the color picture tube. In the diagram shown in Fig. 98, for example, the 6JH8 sheet-beam demodula-

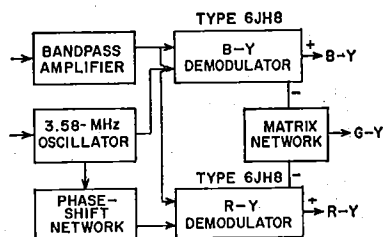


Fig. 98—Block diagram of demodulator circuit used to apply signals directly to color picture tube.

tors produce both positive and negative B-Y and R-Y signals. The positive signals are applied directly to the control grids (grid No. 1) of the blue and red guns of the color picture tube. At the same time, the negative color-difference signals are added (matrixed) in the correct proportions to produce the G-Y

signal, which is applied to grid No. 1 of the green gun.

## Oscillation

As an oscillator, an electron tube can be employed to generate a continuously alternating voltage. In present-day radio broadcast receivers, this application is limited practically to superheterodyne receivers for supplying the heterodyning frequency. Several circuits (represented in Fig. 99) may be utilized, but they all depend on feeding more energy from the plate circuit to the grid circuit than is required to equal the power loss in the grid circuit. Feedback may be produced by electrostatic or electromagnetic coupling between the grid and plate circuits. When sufficient energy is fed back to more than compensate for the loss in the grid circuit, the tube will oscillate.

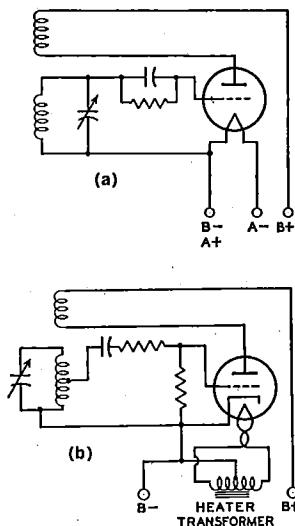


Fig. 99—Tuned-grid triode oscillator circuit: (a) using filament-type tube; (b) using heater-cathode-type tube.

The action consists of regular surges of power between the plate and the grid circuit at a frequency dependent on the circuit constants of inductance and capacitance. By proper choice of these values, the frequency may be adjusted over a very wide range.



### Multivibrators

Relaxation oscillators, which are widely used in present-day electronic equipment, are used to produce non-sinusoidal waveshapes such as rectangular and sawtooth pulses. Probably the most common relaxation oscillator is the multivibrator, which may be considered as a two-stage resistance-coupled amplifier in which the output of each tube is coupled into the input of the other tube.

Fig. 100 is a basic multivibrator circuit of the free-running type. In this circuit, oscillations are maintained by the alternate shifting of conduction from one tube to the other. The cycle usually starts with one tube,  $V_1$ , at zero bias, and the other,  $V_2$ , at cutoff or beyond. At this point, the capacitor  $C_1$  is charged sufficiently to cut off  $V_2$ .  $C_1$  then begins to discharge through the resistor  $R_4$ , and the voltage on the grid of  $V_2$  rises until  $V_2$  begins to conduct. The voltage on the plate of  $V_2$  then decreases, causing  $V_1$  to conduct less and less. At the same time, the plate voltage of  $V_1$  begins to rise, causing  $V_2$  to conduct still more heavily. Because of the amplification, this cumulative effect builds up extremely fast, and conduction switches from  $V_1$  to  $V_2$

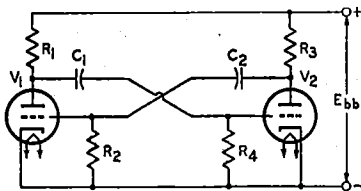


Fig. 100—Basic multivibrator circuit of the free-running type.

within a few microseconds, depending on the circuit components.

In this circuit, therefore, conduction switches from  $V_1$  to  $V_2$  over the interval during which  $C_1$  discharges from the voltage across  $R_4$  to the cutoff voltage for  $V_2$ . The actual transfer of conduction does not occur until cutoff is reached. Conduction switches back to  $V_1$  through a similar process to complete the cycle. The plate waveform is essentially rectangular in shape, and

may be adjusted as to symmetry, frequency, and amplitude by proper choice of circuit constants, tubes, and voltages.

Although this type of multivibrator is free-running, it may be triggered by pulses of a given amplitude and frequency to provide a frequency-stabilized output. Multivibrator circuits may also be designed so that they are not free-running, but must be triggered externally to shift conduction from one tube to the other. Depending on the type of circuit, conduction may shift back to the first tube after a given time interval, or the second tube may continue conducting until another trigger signal is applied.

### Synchroguide Circuits

The "synchroguide" is a controlled type of oscillator used in television receivers to generate and control the synchronized sawtooth voltage necessary for adequate line- or horizontal-frequency scanning. A simplified synchroguide circuit is shown in Fig. 101. This circuit provides stable, noise-free control of a blocking oscillator which generates a horizontal-frequency signal. It permits comparison of the received sync pulses and the generated sawtooth voltages so that properly locked-in horizontal scanning results.

The triode  $V_2$  in Fig. 101 is a conventional blocking oscillator which enables a sawtooth voltage to be developed across the capacitor  $C_2$ . A portion of this sawtooth is fed back to the grid of

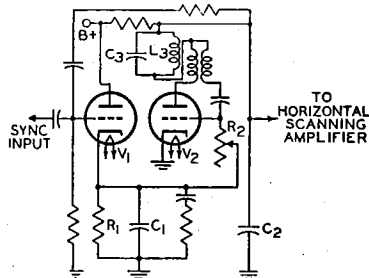


Fig. 101—Simplified synchroguide circuit.

the control tube,  $V_1$ . The positive sync pulses are also applied to the grid of

$V_1$ . The waveforms shown in Fig. 102 illustrate the sawtooth and sync pulses (A and B) and their proper "in-sync" combination (C). The sync pulse occurs partly during the portion of the sawtooth voltage in which the triode  $V_1$  draws current. Any shift in sync pulse as it is superimposed on the sawtooth, therefore, will affect the amount of conduction of the control tube. A change in control-tube conduction ultimately affects the bias on the oscillator-tube grid by changing the voltage to which the capacitor  $C_1$  in the cathode circuit may charge. An increase in the positive bias increases the frequency of oscillation.

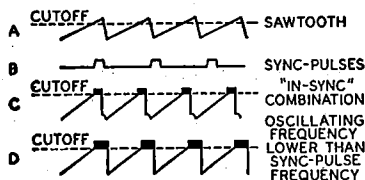


Fig. 102—Sawtooth and sync pulses in synchroguide circuit.

For example, waveform D in Fig. 102 illustrates a condition in which the sawtooth voltage is advanced in phase with respect to the sync pulses. The widening of the pulse which occurs at the corner of the sawtooth waveform allows the control tube to conduct more current and, consequently, allows the capacitor  $C_1$  to charge to a higher voltage. This increased reference voltage also appears in the grid circuit of  $V_2$  and makes the grid more positive. The increased grid voltage then speeds up the frequency of oscillations until proper synchronization results.

The blocking oscillator can be made more immune to changes in frequency and noise if  $V_2$  is brought out of cutoff very sharply. This effect is obtained by sine-wave stabilization. The tuned circuit  $L_3C_3$  in the plate circuit of Fig. 101 superimposes a shock-excited sine wave on the plate and grid waveforms, as shown in Fig. 103.

### Automatic Frequency Control

An automatic frequency control

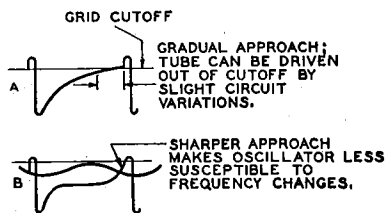


Fig. 103—Waveforms showing effect of tuned circuit  $L_3C_3$  in Fig. 101.

(afc) circuit provides a means of correcting automatically the intermediate frequency of a superheterodyne receiver when, for any reason, it drifts from the frequency to which the if stages are tuned. This correction is made by adjusting the frequency of the oscillator. Such a circuit will automatically compensate for slight changes in rf carrier or oscillator frequency as well as for inaccurate manual or push-button tuning.

An afc system requires two sections: a frequency detector and a variable reactance. The detector section may be essentially the same as the FM detector illustrated in Fig. 30 and discussed under **Detection**. In the afc system, however, the output is a dc control voltage, the magnitude of which is proportional to the amount of frequency shift. This dc control voltage is used to control the grid bias of an electron tube which comprises the variable reactance section (Fig. 104).

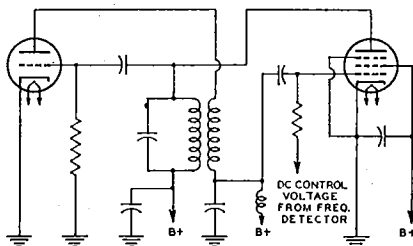


Fig. 104—Automatic-frequency-control (afc) circuit.

The plate current of the reactance tube is shunted across the oscillator tank circuit. Because the plate current and plate voltage of the reactance tube are

almost 90 degrees out of phase, the control tube affects the tank circuit in the same manner as a reactance. The grid bias of the tube determines the magnitude of the effective reactance and, consequently, a control of this grid bias can be used to control the oscillator frequency.

Automatic frequency control is also used in television receivers to keep the horizontal oscillator in step with the horizontal-scanning frequency (15,750 Hz) at the transmitter. A widely used horizontal afc circuit is shown in Fig. 105. This circuit, which is often referred to as a **balanced-phase-detector** or **phase-discriminator** circuit, is usually employed to control the frequency of a multivibrator-type horizontal-oscillator circuit. The 6AL5 detector supplies a dc control voltage to the grid of the horizontal-oscillator tube which counteracts changes in its operating frequency. The magnitude and polarity of the control voltages are determined by phase relationships in the afc circuit at a given moment.

The horizontal sync pulses obtained from the sync-separator circuit are fed through a single-triode phase-inverter or phase-splitter circuit to the two diode units of the 6AL5. Because of the action of the phase-inverter circuit, the signals applied to the two diode units are equal in amplitude but 180 degrees out of

phase. A reference sawtooth voltage obtained from the horizontal output circuit is also applied simultaneously to both units. Any change in the oscillator frequency alters the phase relationship between the reference sawtooth and the incoming horizontal sync pulses, causing one diode unit of the 6AL5 to conduct more heavily than the other, and thus producing a correction signal. The system remains balanced at all times, therefore, because momentary changes in oscillator frequency are instantaneously corrected by the action of the control voltage.

The diode units of the 6AL5 are biased so that conduction takes place only during the tips of the sync pulses. The relative position of the sync pulses on the retrace portion of the sawtooth waveform at any given instant determines which diode unit conducts more heavily, and thereby establishes the magnitude and polarity of the control voltage. The network between the diode units and the grid of the horizontal-oscillator tube is essentially a low-pass filter which prevents the horizontal sync pulses from affecting the horizontal-oscillator performance.

## Frequency Conversion

Frequency conversion is used in superheterodyne receivers to change the frequency of the rf signal to an intermediate frequency. To perform this change in frequency, a frequency-converting device consisting of an oscillator and a frequency mixer is employed. In such a device, shown diagrammatically in Fig. 106, two voltages of different frequency, the rf signal voltage and the voltage generated by the oscillator, are applied to the input of the frequency mixer. These voltages beat, or heterodyne, within the mixer tube to produce a plate current having, in addition to

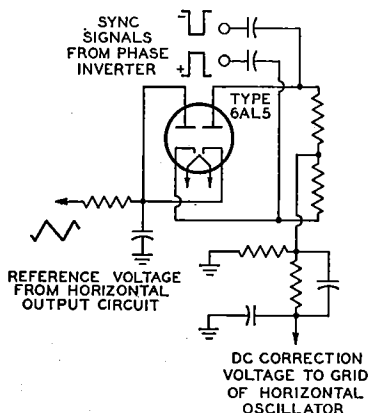


Fig. 105—Balanced phase-detector or phase-discriminator circuit for horizontal afc.

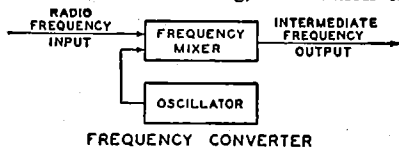


Fig. 106—Block diagram of simple frequency-converter circuit.

the frequencies of the input voltages, numerous sum and difference frequencies.

The output circuit of the mixer stage is provided with a tuned circuit which is adjusted to select only one beat frequency, *i.e.*, the frequency equal to the difference between the signal frequency and the oscillator frequency. The selected output frequency is known as the intermediate frequency, or *if*. The output frequency of the mixer tube is kept constant for all values of signal frequency by tuning the oscillator to the proper frequency.

Important advantages gained in a receiver by the conversion of signal frequency to a fixed intermediate frequency are high selectivity with few tuning stages and a high, as well as stable, overall gain for the receiver.

Several methods of frequency conversion for superheterodyne receivers are of interest. These methods are alike in that they employ a frequency-mixer tube in which plate current is varied at a combination frequency of the signal frequency and the oscillator frequency. These variations in plate current produce across the tuned plate load a voltage of the desired intermediate frequency. The methods differ in the types of tubes employed and in the means of supply input voltages to the mixer tube.

A method widely used before the availability of tubes especially designed for frequency-conversion service, and currently used in many FM, television, and standard broadcast receivers, employs as mixer tube either a triode, a tetrode, or a pentode, in which oscillator voltage and signal voltage are applied to the same grid. In this method, coupling between the oscillator and mixer circuits is obtained by means of inductance or capacitance.

A second method employs a tube having an oscillator and frequency mixer combined in the same envelope. In one form of such a tube, coupling between the two units is obtained by means of the electron stream within the tube. Because five grids are used, the tube is called a pentagrid converter.

Grids No. 1 and No. 2 and the

cathode are connected to an external circuit to act as a triode oscillator. Grid No. 1 is the grid of the oscillator and grid No. 2 is the anode. Grid No. 2 is connected within the tube to the screen grid (grid No. 4). The combined two grids, Nos. 2 and 4, shield the signal grid (grid No. 3) and act as the composite anode of the oscillator triode. Grid No. 5 acts as the suppressor grid.

Converter tubes of this type are designed so that the space charge around the cathode is unaffected by electrons from the signal grid. Furthermore, the electrostatic field of the signal grid also has little effect on the space charge. The result is that *rf* voltage on the signal grid produces little effect on the cathode current. There is, therefore, little detuning of the oscillator by *avc* bias because changes in *avc* bias produce little change in oscillator transconductance or in the input capacitance of grid No. 1.

Examples of the pentagrid converters discussed in the preceding paragraph are the single-ended types 1R5 and 6BE6. A schematic diagram illustrating the use of the 6BE6 with self-excitation is given in Fig. 107. The 6BE6 may also be used with separate excitation. A complete circuit is shown in the **Circuits** section.

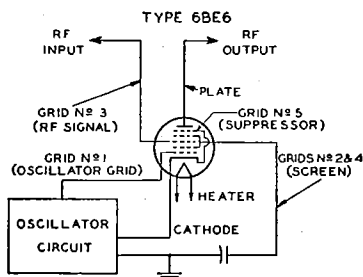


Fig. 107—Frequency-converter circuit using the 6BE6 pentagrid converter with self-excitation.

A further method of frequency conversion employs a tube called a pentagrid mixer. This type has two independent control grids and is used with a separate oscillator tube. *RF* signal voltage is applied to one of the control grids

and oscillator voltage is applied to the other. It follows, therefore, that the variations in plate current are due to the combination of the oscillator and signal frequencies.

The tube contains a heater-cathode, five grids, and a plate. Grids Nos. 1 and 3 are control grids. The rf signal voltage is applied to grid No. 1. This grid has a remote-cutoff characteristic and is suited for control by AVC bias voltage. The oscillator voltage is applied to grid No. 3. This grid has a sharp-cutoff characteristic and produces a comparatively large effect on plate current for a small amount of oscillator voltage. Grids Nos. 2 and 4 are connected together within the tube. They accelerate the electron stream and shield grid No. 3 electrostatically from the other electrodes. Grid No. 5, connected within the tube to the cathode, functions similarly to the suppressor grid in a pentode.

In the converter or mixer stage of a television receiver, stable oscillator operation is most readily obtained when separate tubes or tube sections are used for the oscillator and mixer functions. A typical television mixer-oscillator circuit is shown in Fig. 108. In such circuits, the oscillator voltage is applied to the mixer grid by inductive coupling, capacitive coupling, or a combination of the two. Tubes containing electrically independent oscillator and mixer units in the same envelope, such as the 6EA8 and 6KE8 are designed especially for this application.

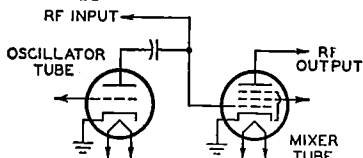


Fig. 108—Typical television mixer-oscillator circuit.

### Tuning Indication With Electron-Ray Tubes

Electron-ray tubes are designed to indicate visually by means of a fluorescent target the effects of a change in controlling voltage. One application of them is as tuning indicators in radio receivers. Types such as the 6U5 and

the 6E5 contain two main parts: (1) a triode which operates as a dc amplifier and (2) an electron-ray indicator which is located in the bulb as shown in Fig. 109. The target is operated at a positive voltage and, therefore, attracts electrons from the cathode. When the electrons strike the target they produce a glow on the fluorescent coating of the target. Under these conditions, the target appears as a ring of light.

A ray-control electrode is mounted between the cathode and target. When the potential of this electrode is less positive than the target, electrons flowing to the target are repelled by the electrostatic field of the electrode, and do not reach that portion of the target behind the electrode. Because the target does not glow where it is shielded from electrons, the control electrode casts a

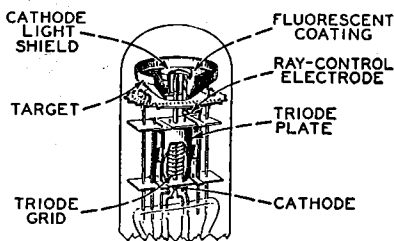


Fig. 109—Structure of electron-ray tube.

shadow on the glowing target. The extent of this shadow varies from approximately 100 degrees of the target when the control electrode is much more negative than the target to 0 degrees when the control electrode is at approximately the same potential as the target.

In the application of the electron-ray tube, the potential of the control electrode is determined by the voltage on the grid of the triode section, as can be seen in Fig. 110. The flow of the triode plate current through resistor R produces a voltage drop which determines the potential of the control electrode. When the voltage of the triode grid changes in the positive direction, plate current increases, the potential of the control electrode goes down because of the increased drop across R, and the

shadow angle widens. When the potential of the triode grid changes in the negative direction, the shadow angle narrows.


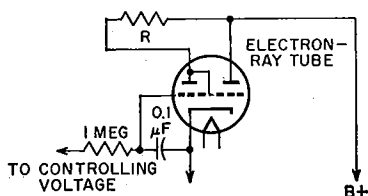


Fig. 110—Indicating circuit using an electron-ray tube.

Another type of indicator tube is the 6AF6G. This tube contains only an indicator unit but employs two ray-control electrodes mounted on opposite sides of the cathode and connected to individual base pins. It employs an external dc amplifier. (See Fig. 111.) Thus, two symmetrically opposite shadow angles may be obtained by connecting the two ray-control electrodes together; or, two unlike patterns may be obtained by individual connection of each ray-control electrode to its respective amplifier.

In radio receivers, avc voltage is applied to the grid of the dc amplifier.



R: TYPICAL VALUE IS 0.5 MEGOHM

Fig. 111—Indicating circuit using 6AF6G electron-ray tube and external dc amplifier.

Because avc voltage is at maximum when the set is tuned to give maximum response to a station, the shadow angle is at minimum when the receiver is tuned to resonance with the desired station.

The choice between electron-ray tubes depends on the avc characteristic of the receiver. The 6E5 contains a sharp-cutoff triode which closes the shadow angle on a comparatively low value of avc voltage. The 6U5 has a remote-cutoff triode which closes the shadow on a larger value of avc voltage than the 6E5. The 6AF6G may be used in conjunction with dc amplifier tubes having either remote- or sharp-cutoff characteristics.

# Electron Tube Installation

**T**HE installation of electron tubes requires care if reliable performance is to be obtained from the associated circuits. Installation suggestions and precautions which are generally common to all types of tubes are covered in this section. Additional pertinent information is given under each tube type and in the **Circuits** section.

## Filament and Heater Power Supply

The design of electron tubes allows for some variation in the voltage and current supplied to the filament or heater, but most satisfactory results are obtained from operation at the rated values. When the voltage is low, the temperature of the cathode is below normal, with the result that electron emission is limited. The limited emission may cause unsatisfactory operation and reduced tube life. On the other hand, high heater voltage may cause rapid evaporation of cathode material and shorten tube life.

To insure proper tube operation, it is important that the filament or heater voltage be checked at the socket terminals by means of a high-resistance voltmeter while the equipment is in operation. In the case of series operation of heaters or filaments, correct adjustment can be checked by means of an ammeter in the heater or filament circuit.

The filament or heater voltage supply may be a direct-current source (a battery or a dc power line) or an alternating-current power line, depending on the type of service and type of tube.

Ordinarily, a step-down transformer is used with an ac supply to provide the proper filament or heater voltage. Receivers intended for operation on both dc and ac power lines have the heaters connected in series with a suitable resistor and supplied directly from the power line.

Mobile and marine receivers have the heaters of the tubes connected directly across the battery supply.

**Parallel heater operation** usually requires a step-down transformer to reduce the 120 Vac line voltage to typically 6.3 Vac. Care must be taken to prevent excessive voltage drop in the heater circuit wiring which would result in incorrect voltage at the tube terminals.

**Series heater operation** eliminates the need for a step-down transformer and is economical when a number of tubes rated at the same heater current have a total heater voltage drop which adds up to an available supply voltage. A voltage-dropping resistor in series with the heaters and the supply line is usually required. This resistance should be of such value that for normal line voltage the tubes will operate at their rated heater current. The resistor value is calculated by the following formula.

$$\text{Required resistance (ohms)} = \frac{\text{supply volts} - \text{total rated volts of tubes}}{\text{rated amperes of tubes}}$$

The power dissipation of the resistor (in watts) is equal to the voltage drop of the resistor multiplied by the series string current in amperes. A resistor having a wattage rating well

in excess of this value should be chosen.

A convenient means exists for obtaining a heater supply voltage drop without the disadvantage of a power-dissipating resistor. A diode in series with the 120 Vac line provides a half wave rectified sine wave of 84 V ( $\frac{\sqrt{2}}{2}$  x RMS input). The diode po-

larity should be such as to operate the heaters negative. (See **heater-cathode voltage** below.) In TV receivers designed for instant-on operation such a series-connected diode can be used for stand-by operation (70% of rated heater voltage) of a 120 Vac series string.

### Heater-Cathode Voltage

When the series-heater connection is used in equipment, it is advisable to arrange the heaters in the circuit so that tubes most sensitive to hum disturbances are at or near ground potential of the circuit. This arrangement reduces the amount of AC heater-cathode voltage of these tubes and minimizes hum interference. Other tubes operated with grounded cathode, such as horizontal deflection amplifiers or tube insulated for high heater cathode voltage, such as damper, are more immune to heater-cathode leakage.

Typical orders of series-string connections, by tube function, are shown below.

Heater-type tubes may produce

hum as a result of conduction between heater and cathode or between heater and control grid, or by modulation of the electron stream by the alternating magnetic field surrounding the heater. When a large resistor is used between heater and cathode (as in series-connected heater strings), or when one side of the heater is grounded, even a minute pulsating leakage current between heater and cathode can develop a small voltage across the cathode-circuit impedance and cause objectionable hum. The use of a large cathode bypass capacitor is recommended to minimize this source of hum.

Much lower hum levels can be achieved when heaters are connected in parallel systems in which the center-tap of the heater supply is grounded or, preferably, connected to a positive bias source of 15 to 80 volts dc to reduce the flow of alternating current. The heater leads of the tubes should be twisted and kept away from high-impedance circuits. The balanced ac supply provides almost complete cancellation of the alternating-current components.

The balanced arrangement described above also minimizes heater-grid hum. High grid-circuit impedances should be avoided, if possible. High heater voltages should also be avoided because heater-cathode hum rises sharply when the heater voltage is increased above the published value.

Certain tube types are designed especially to minimize hum in high-quality, high-fidelity audio equipment. Examples are the 5879, 7025, and 7199.

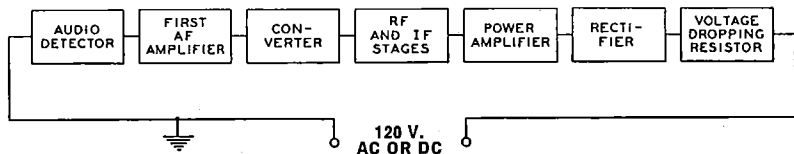


Fig. 112A—Order of series heater-string connection, by tube function, to minimize hum in a radio receiver.



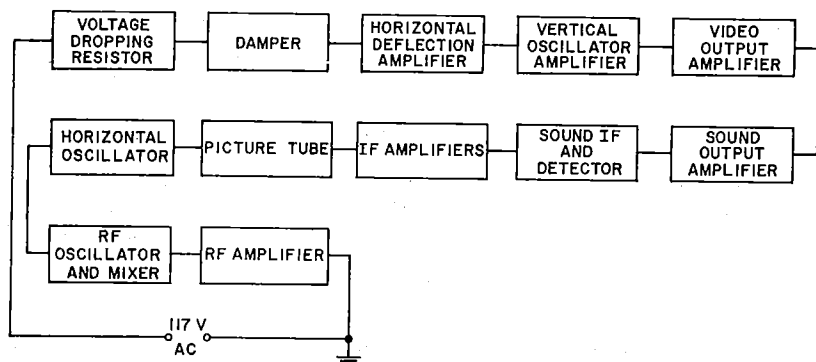


Fig. 112B—Order of series heater-string connection, by tube function, to minimize hum in a TV receiver.

## Plate Voltage Supply

The plate voltage for electron tubes is obtained from batteries, rectifiers, direct-current power lines, and small local generators. The maximum plate-voltage value for any tube type should not be exceeded if most satisfactory performance is to be obtained. Plate voltage should not be applied to a tube unless the corresponding recommended voltage is also supplied to the grid.

It is recommended that the primary circuit of the power transformer be fused to protect the rectifier tube(s), the power transformer, filter capacitor, and chokes in case a rectifier tube fails.

## Grid Voltage Supply

The recommended grid voltages for different operating conditions have been carefully determined to give the most satisfactory performance. Grid voltage may be obtained from a fixed source such as a separate C-battery or a tap on the voltage divider of the high-voltage dc supply, from the voltage drop across a resistor in the cathode circuit, or from the voltage drop across a resistor in the grid circuit. The first method is called "fixed bias"; the second is called "cathode bias" or "self bias"; the third is called "grid-resistor bias" and is sometimes incorrectly referred to in receiving-tube practice as "zero-bias operation."

In any case, the object is to make the grid negative with respect to the cathode by the specified voltage. When a C-battery is used, the negative terminal is connected to the grid return and the positive terminal is connected to the negative filament socket terminal, or to the cathode terminal if the tube is of the heater-cathode type. If the filament is supplied with alternating current, this connection is usually made to the center-tap of a low resistance (20 to 50 ohms) shunted across the filament terminals. This method reduces hum disturbances caused by the ac supply. If bias voltages are obtained from the voltage divider of a high-voltage dc supply, the grid return is connected to a more negative tap than the cathode.

The **cathode-biasing** method utilizes the voltage drop produced by the cathode current flowing through a resistor connected between the cathode and the negative terminal of the B-supply. (See Fig. 113.) The cathode current is, of course, equal to the plate current in the case of a triode, or to the sum of the plate and grid-No. 2 currents in the case of a tetrode, pentode, or beam power tube. Because the voltage drop along the resistance is increasingly negative with respect to the cathode, the required negative grid-bias voltage can be obtained by connecting the grid return to the negative end of the resistance.

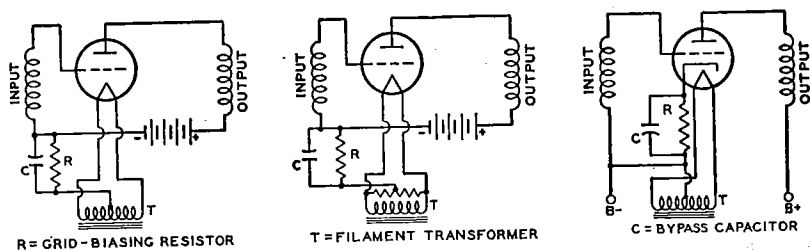


Fig. 113—Typical grid-voltage supply circuits.

The value of the resistance for cathode-biasing a single tube can be determined from the following formula:

$$\text{Resistance (ohms)} = \frac{\text{desired grid-bias voltage} \times 1000}{\text{rated cathode current in milliamperes}}$$

Thus, the resistance required to produce 9 volts bias for a triode which operates at 3 milliamperes plate current is  $9 \times 1000/3 = 3000$  ohms. If the cathode current of more than one tube passes through the resistor, or if the tube or tubes employ more than three electrodes, the total current determines the size of the resistor.

**Bypassing** of the cathode-bias resistor depends on circuit-design requirements. In rf circuits the cathode resistor usually is bypassed. In af circuits the use of an unbypassed resistor will reduce distortion by introducing degeneration into the circuit. However, the use of an unbypassed resistor decreases gain and power sensitivity. When bypassing is used, it is important that the bypass capacitor be sufficiently large to have negligible reactance at the lowest frequency to be amplified.

In the case of power-output tubes having high transconductance, such as beam power tubes, it may be necessary to shunt the bias resistor with a small mica capacitor (approximately  $0.001 \mu\text{F}$ ) in order to prevent oscillations. The usual af bypass may or may not be used, depending on whether or not degeneration is desired. In tubes having high values of transconductance, such as the 6BA6, 6CB6A, and 6AC7, input capacitance and input conductance change appreciably with plate current.

When such a tube having a separate suppressor-grid connection is used as an rf amplifier, these changes may be minimized by leaving a certain portion of the cathode-bias resistor unbypassed. In order to minimize feedback when this method is used, the external grid-No. 1-to-plate (wiring) capacitances should be kept to a minimum, the grid No. 2 should be bypassed to ac ground, and the grid No. 3 should be connected to ac ground.

The use of a cathode resistor to obtain bias voltage is not recommended for amplifiers in which there is appreciable shift of electrode currents with the application of a signal. In such amplifiers, a separate fixed supply is recommended.

The **grid-resistor biasing** method is also a self-bias method because it utilizes the voltage drop across the grid resistor produced by small amounts of grid current flowing in the grid-cathode circuit. This current is due to (1) an electromotive potential difference between the materials comprising the grid and cathode and (2) grid rectification when the grid is driven positive. A large value of resistance is required in order to limit this current to a very small value and to avoid undesirable loading effects on the preceding stage.

Examples of this method of bias are given in the **Circuits** section. In these circuits, the audio amplifier type 1U5 or 12AV6 has a 10-megohm resistor between the grid and the negative filament or cathode to furnish the required bias, which is usually less than 1 volt.

This method of biasing is used principally in the early voltage-amplifier stages (usually employing high- $\mu$  triodes) of audio amplifier circuits, where the tube dissipation will not be excessive under zero-signal conditions.

A grid resistor is also used in many oscillator circuits for obtaining the required bias. In these circuits, the grid voltage is relatively constant and its magnitude is usually in the order of 5 volts or more. Consequently, the bias voltage is obtained only through grid rectification. A relatively low value of resistor, 0.1 megohm or less, is used. Oscillator circuits employing this method of bias are given in the **Circuits** section.

**Grid-bias variation** for the rf and if amplifier stages is a convenient and frequently used method for controlling receiver volume. The variable voltage supplied to the grid may be obtained: (1) from a variable cathode resistor as shown in Figs. 114 and 115; (2) from a bleeder circuit by means of a potentiometer as shown in Fig. 116; or (3) from a bleeder circuit in which the bleeder current is varied by a tube




Fig. 114—Amplifier stage using a variable cathode-bias resistor for volume control.

used for automatic volume control. The latter circuit is shown in Fig 61.

In all cases it is important that the control be arranged so that at no time will the bias be less than the recommended minimum grid-bias voltage for the particular tubes used. This requirement can be met by providing a fixed stop on the potentiometer, by connecting a fixed resistance in series with the variable resistance, or by con-

necting a fixed cathode resistance in series with the variable resistance used for regulation. Where receiver gain is




Fig. 115—Amplifier stage similar to Fig. 114 but using heater-cathode-type tube.

controlled by grid-bias variation, it is advisable to have the control voltages extend over a wide range in order to minimize cross-modulation and modulation-distortion. A remote-cutoff type of tube should, therefore, be used in the controlled stages.




Fig. 116—Amplifier stage using a bleeder circuit and potentiometer for volume control.

In most tubes employing a unipotential cathode, a **positive grid current** begins to flow when the grid is slightly negative and increases rapidly as the grid is made more positive, as shown in Fig. 117. The value of grid voltage at which the grid-current curve intercepts the horizontal axis is determined by several different physical processes, including an electrothermal effect due to the differences in temperature and in material composition of the grid and the cathode, and by the positive grid current. For values of grid potentials which are larger than this intercept, the direction of the grid current is positive (*i.e.*, from the cathode to the grid). At smaller values of grid potential, the direction of the grid current

is negative (*i.e.*, from the grid to the cathode).

Positive grid current consists of electrons emitted from the cathode which are intercepted by the control grid. Negative grid current, which becomes appreciable only when the grid potential is more negative than the value of the intercept, is a result of the emission of electrons from the heated control grid to the cathode, the effect of gas molecules in the tube, and the influence of leakage currents between the grid and cathode and the grid and the plate.

The value of grid potential at the intercept of the grid-current curve on the horizontal axis (often mistakenly called **contact potential**) may be as high as  $1\frac{1}{2}$  volts. If the operating bias of the tube is less than this intercept, it is found that two effects are present. Direct current flows in the grid circuit, and the dynamic input resistance of the tube may be relatively low. It is generally desirable to supply the tube with a value of bias sufficiently high so that the operating point of the tube is not near the value of this intercept. If the value of the operating bias is near the value of the intercept, care should be taken to avoid undesirable effects in the grid circuit due to grid current or low input resistance.

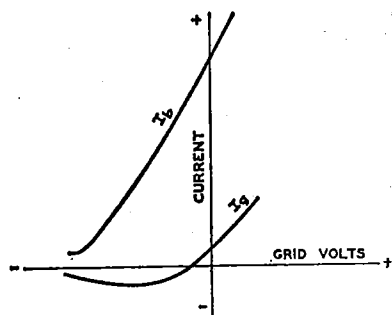


Fig. 117—Curves showing flow of positive grid current in tubes employing unipotential cathodes.

## Screen-Grid Voltage Supply

The positive voltage for the screen grid (grid No. 2) of screen-grid tubes may be obtained from a tap on a voltage divider, from a potentiometer, or from a series resistor connected to a high-voltage source, depending on the particular tube type and its application. The screen-grid voltage for tetrodes should be obtained from a voltage divider or a potentiometer rather than through a series resistor from a high-voltage source because of the characteristic screen-grid current variations of tetrodes. Fig. 118 shows a tetrode with its screen-grid voltage obtained from a potentiometer.

When pentodes or beam power tubes are operated under conditions where a large shift of plate and screen-grid currents does not take place with the application of the signal, the screen-grid voltage may be obtained through a series resistor from a high-voltage




Fig. 118—Tetrode circuit in which screen-grid voltage is obtained from a potentiometer.

source. This method of supply is possible because of the high uniformity of the screen-grid current characteristic in pentodes and beam power tubes. Because the screen-grid voltage rises with increase in bias and resulting decrease in screen-grid current, the cutoff characteristic of a pentode is extended by this method of supply.

This method is sometimes used to increase the range of signals which can be handled by a pentode. When used in resistance-coupled amplifier circuits employing pentodes in combination

with the cathode-biasing method, it minimizes the need for circuit adjustments. Fig. 119 shows a pentode with its screen-grid voltage supplied through a series resistor.

When power pentodes and beam power tubes are operated under conditions such that there is a large change in plate and screen-grid currents with the application of signal, the series-resistor method of obtaining screen-grid voltage should not be used. A change in screen-grid current appears as a




Fig. 119—Pentode circuit in which screen-grid voltage is supplied through a series resistor.

change in the voltage drop across the series resistor in the screen-grid circuit; the result is a change in the power output and an increase in distortion. The screen-grid voltage should be obtained from a point in the plate-voltage-supply filter system having the correct voltage, or from a separate source.

It is important to note that the plate voltage of tetrodes, pentodes, and beam power tubes should be applied before or simultaneously with the screen-grid voltage. Otherwise, with voltage on the screen grid only, the screen-grid current may rise high enough to cause excessive screen-grid dissipation.

**Screen-grid voltage variation** for the rf amplifier stages has sometimes been used for volume control in older-type receivers. Reduced screen-grid voltage decreases the transconductance of the tube and results in reduced gain per stage. The voltage variation is obtained by means of a potentiometer shunted across the screen-grid voltage supply. (See Fig. 118.) When the screen-grid voltage is varied, it must never

exceed the rating of the tube. This requirement can be met by providing a fixed stop on the potentiometer.

## Shielding

In high-frequency stages having high gain, the output circuit of each stage must be shielded from the input circuit of that stage. Each high-frequency stage also must be shielded from the other high-frequency stages. Unless shielding is employed, undesired feedback may occur and may produce many harmful effects on receiver performance.

To prevent this feedback, it is a desirable practice to shield separately each unit of the high-frequency stages. For instance, in a superheterodyne receiver, each if and rf coil may be mounted in a separate shield can. Baffle plates may be mounted on the ganged tuning capacitor to shield each section of the capacitor from the other section. The oscillator coil may be especially well shielded by being mounted under the chassis.

The shielding precautions required in a receiver depend on the design of the receiver and the layout of the parts. In all receivers having high-gain high-frequency stages, it is necessary to shield separately each tube in high-frequency stages. When metal tubes, and in particular the single-ended types, are used, complete shielding of each tube is provided by the metal shell which is grounded through its grounding pin at the socket terminal. The grounding connection should be short and sturdy. Many modern tubes of glass construction have internal shields, usually connected to the cathode; where present, these shields are indicated in the socket diagram.

## Dress of Circuit Leads

At high frequencies such as are encountered in FM and television receivers, lead dress, that is, the location and arrangement of the leads used for

connections in the receiver, is very important. Because even a short lead provides a large impedance at high frequencies, it is necessary to keep all high-frequency leads as short as possible. This precaution is especially important for ground connections and for all connections to bypass capacitors and high-frequency filter capacitors. The ground connections of plate and screen-grid bypass capacitors of each tube should be kept short and made directly to cathode ground.

Particular care should be taken with the lead dress of the input and output circuits of high-frequency stages so that the possibility of stray coupling is minimized. Unshielded leads connected to shielded components should be dressed close to the chassis. As the frequency increases, the need for careful lead dress becomes increasingly important.

In high-gain audio amplifiers, these same precautions should be taken to minimize the possibility of self-oscillation.

## Filters

Feedback effects also are caused in radio or television receivers by coupling between stages through common voltage-supply circuits. Filters find an important use in minimizing such effects. They should be placed in voltage-supply leads to each tube in order to return the signal current through a low-impedance path direct to the tube cathode rather than by way of the voltage-supply circuit. Fig. 120 illustrates several forms of filter circuits. Capacitor C forms the low-impedance path, while the choke or resistor assists in diverting the signal through the capacitor by offering a high impedance to the power-supply circuit.

The choice between a resistor and a choke depends chiefly upon the permissible dc voltage drop through the filter. In circuits where the current is small (a few milliamperes), resistors are practical; where the current is large or

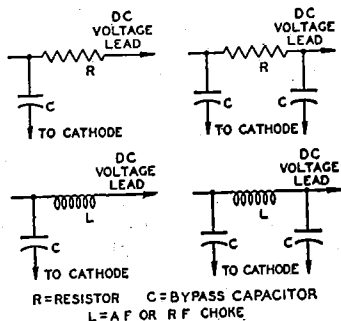


Fig. 120—Typical filter circuits.

regulation important, chokes are more suitable.

The minimum practical size of the capacitors may be estimated in most cases by the following rule: The impedance of the capacitor at the lowest frequency amplified should not be more than one-fifth of the impedance of the filter choke or resistor at that frequency. Better results will be obtained in special cases if the ratio is not more than one-tenth.

Radio-frequency circuits, particularly at high frequencies, require high-quality capacitors. Mica or ceramic capacitors are preferable. Where stage shields are employed, filters should be placed within the shield.

Another important application of filters is to smooth the output of a rectifier tube. (See **Rectification**.) A smoothing filter usually consists of capacitors and iron-core chokes. In any filter-design problem, the load impedance must be considered as an integral part of the filter because the load is an important factor in filter performance. Smoothing effect is obtained from the chokes because they are in series with the load and offer a high impedance to the ripple voltage. Smoothing effect is obtained from the capacitors because they are in parallel with the load and store energy on the voltage peaks; this energy is released on the voltage dips and serves to maintain the voltage at the load substantially

constant. Smoothing filters are classified as choke-input or capacitor-input according to whether a choke or capacitor is placed next to the rectifier tube. (See Fig. 121.)

plate and transformer winding and to connect high-voltage, rf bypass capacitors between the outside ends of the transformer winding and the center tap. (See Fig. 122.) The rf chokes should

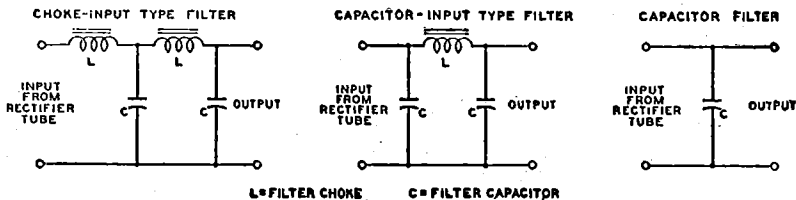


Fig. 121—Typical smoothing filters for rectifier tubes.

The **Circuits** section gives a number of examples of rectifier circuits with recommended filter constants.

If an input capacitor is used, consideration must be given to the instantaneous peak value of the ac input voltage. This peak value is about 1.4 times the rms value as measured by an ac voltmeter. Filter capacitors, therefore, especially the input capacitor, should have a rating high enough to withstand the instantaneous peak value if breakdown is to be avoided. When the input-choke method is used, the available dc output voltage will be somewhat lower than with the input-capacitor method for a given ac plate voltage. However, improved regulation together with lower peak current will be obtained.

Mercury-vapor and gas-filled rectifier tubes occasionally produce a form of local interference in radio receivers through direct radiation or through the power line. This interference is generally identified in the receiver as a broadly tunable 120-Hz buzz (100 Hz for 50-Hz supply line, etc.). It is usually caused by the formation of a steep wave front when plate current within the tube begins to flow on the positive half of each cycle of the ac supply voltage.

There are several ways of eliminating this type of interference. One is to shield the tube. Another is to insert an rf choke having an inductance of one millihenry or more between each

be placed within the shielding of the tube. The rf bypass capacitors should have a voltage rating high enough to withstand the peak voltage of each half of the secondary, which is approximately 1.4 times the rms value.

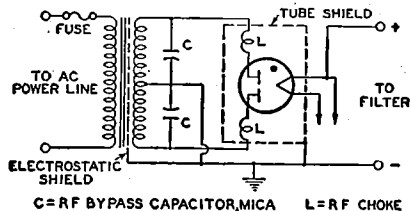


Fig. 122—Filter circuit used to eliminate interference produced by mercury-vapor or gas-filled rectifier tubes.

Transformers having electrostatic shielding between primary and secondary are not likely to transmit rf disturbances to the line. Often the interference may be eliminated simply by making the plate leads of the rectifier extremely short. In general, the particular method of interference elimination must be selected by experiment for each installation.

## Output Coupling Devices

An output-coupling device is used in the plate circuit of a power output tube to keep the comparatively high dc plate current from the winding of an electromagnetic speaker and, also, to

transfer power efficiently from the output stage to a loudspeaker of either the electromagnetic or dynamic type.

Output-coupling devices are of two types, (1) choke-capacitor and (2) transformer. The choke-capacitor type includes an iron-core choke having an inductance of not less than 10 henries which is placed in series with the plate and B-supply. The choke offers a very low resistance to the dc plate current component of the signal voltage but opposes the flow of the fluctuating component. A bypass capacitor of 2 to 6 microfarads supplies a path to the speaker winding for the signal voltage. The choke-coil output coupling device, however, is now only of historical interest.

The transformer type is constructed with two separate windings, a primary and a secondary wound on an iron core. This construction permits designing each winding to meet the requirements of its position in the circuit. Typical arrangements of each type of coupling device are shown in Fig. 123. Examples of transformers for push-pull stages are shown in several of the circuits given in the **Circuits** section.




Fig. 123—Typical output-coupling devices.

## High-Fidelity Systems

The results achieved from any high-fidelity amplifier system depend to a large degree upon the skill and care with which the system is constructed. Improper placement of transformers, other components, and wiring, and attempts to achieve excessive compact-

ness, can only result in instability, oscillation, hum, and other operating difficulties, as well as in damage to components by overheating. It is important, therefore, that construction of high-fidelity amplifier systems be undertaken only by persons who have had some experience in the layout, mechanical construction, and wiring of audio equipment.

It is impractical to give specific construction data for various amplifiers and supplementary units because the best arrangement for each unit or combination of units will depend on the requirements of the user. It is possible, however, to list some general considerations which should be observed in the construction of any high-fidelity amplifier system.

Any amplifier having two or more stages should be constructed with a straight-line layout so that maximum separation is provided between the signal input and output circuits and terminals. Power-supply connections, particularly those carrying ac, should be isolated as far as possible from signal connections, especially from the input connection. Signal-carrying conductors, even when shielded, should not be cabled together with power-supply conductors. Internal wiring for ac-operated tube heaters, switches, pilot-light sockets, and other devices, should be twisted and placed flat against the chassis. All connections to the ground side of the circuit in each unit should be made to a common bus of heavy wire. This bus should be connected to the chassis only at the point of minimum signal voltage, *i.e.*, at the signal-input terminal of the unit.

All internal wiring that carries signal voltages should be as short as possible, and as far as possible above the chassis, to minimize losses at the higher audio frequencies due to stray shunt capacitance. All connections between units should be made with shielded cable having a capacitance of not more than 30 picofarads per foot, such as Alpha Type 1249 or 1704, Belden Type 8401 or 8410, or equivalent cable.



Because power amplifiers and power-supply units of high-fidelity systems normally dissipate large amounts of heat, they should be constructed and installed in such a manner as to assure adequate ventilation for the tubes and other components. A beam power tube or rectifier tube should be separated from any other tube or component on the same side of the chassis by at least  $1\frac{1}{2}$  tube diameters.

Power amplifiers and power-supply units which are to be installed horizontally (*i.e.*, with the tubes vertical) in cabinets or on shelves should be provided with mounting feet, perforated bottom covers, and a number of small holes around each tube socket to permit relatively cool air to enter from below and provide ventilation for the under side of the chassis and tubes.

If a power amplifier, tone-control amplifier, and one or more preamplifiers are to be constructed on the same chassis, the mechanical layout should be planned so that the circuits operating at the lowest signal levels are farthest from the output stage and power supply. Amplifier units which normally operate at comparable signal levels but are not used simultaneously (such as preamplifiers for tape pickup heads and magnetic phonograph pickups) may be installed side by side on the same chassis without danger of interaction. Units which operate simultaneously, however (such as the channels of a stereophonic system), should not be installed side by side on the same chassis without careful consideration to placement of components and wiring, and the possible use of shielding to prevent interaction.

When an amplifier, preamplifier, mixer, or other unit requiring heater power is located more than five or six feet from its power-supply unit, the heater-current conductors in the power-supply cable must be large enough to assure that each tube receives its rated heater voltage. In cases where very large heater currents or very long power-supply cables are involved, it may be desirable to install a heater-

supply transformer on or near the amplifier unit. If such a transformer is installed on or near a preamplifier for a magnetic-tape pickup head, a magnetic phonograph pickup, or a dynamic microphone, the transformer should be completely shielded and positioned to prevent its field from inducing hum in the pickup device.

### Considerations for Television Picture Tubes

Like other high-voltage devices, television picture tubes require that certain precautions be observed to minimize the possibility of failure caused by humidity, dust, and corona.

**Humidity Considerations.** When humidity is high, a continuous film of moisture may form on the glass bulb immediately surrounding the anode cavity cap of all-glass picture tubes or on the glass part of the envelope of metal picture tubes. This film may permit sparking to take place over the glass surface to the external conductive coating or to the metal shell. Such sparking may introduce noise into the receiver. To prevent such a possibility, the uncoated bulb surface around the cap and the glass part of the envelope of metal picture tubes should be kept clean and dry.

**Dust Considerations.** The accumulation of dust on the uncoated area of the bulb around the anode cap of all-glass picture tubes or on the glass part of the envelope or insulating supports for metal picture tubes will decrease the insulating qualities of these parts. The dust usually consists of fibrous materials and may contain soluble salts. The fibers absorb and retain moisture; the soluble salts provide electrical leakage paths that increase in conductivity as the humidity increases. The resulting high leakage currents may overload the high-voltage power supply.

It is recommended, therefore, that the uncoated bulb surface of all-glass picture tubes and the coated glass sur-

face and insulating supports for metal picture tubes be kept clean and free from dust or other contamination such as finger-prints. The frosted Filterglass faceplate of the metal picture tubes may be cleaned with a soapless detergent, such as Dreft, then rinsed with clean water, and immediately dried.

**Corona Considerations.** A high-voltage system may be subject to corona, especially when the humidity is high, unless suitable precautions are taken. Corona, which is an electrical discharge appearing on the surface of a conductor when the voltage gradient exceeds the breakdown value of air, causes deterioration of organic insulating materials through formation of ozone, and induces arc-over at points and sharp edges. Sharp points or other irregularities on any part of the high-

voltage system may increase the possibility of corona and should be avoided.

In the metal-shell picture tubes, the metal lip at the maximum diameter has rounded edges to prevent corona. Adequate spacing between the lip and any grounded element in the receiver, or between the small end of the metal shell and any grounded element, should be provided to preclude the possibility of corona. Such spacing should not be less than 1 inch of air. Similarly, an air space of 1 inch, or equivalent, should be provided around the body of the metal shell. As a further precaution to prevent corona, the deflecting-yoke surface on the end adjacent to the shell should present a smooth electrical surface with respect to the small end of the metal shell or the anode terminal of all-glass tubes.

# Safety Precautions

## Shock Hazard and High Voltage Warning—Receiving Tubes

Most electron tubes present a shock hazard in use because of the voltages at which they operate. This hazard applies to all applications and is not restricted to high-voltage circuits. Therefore, precautions should be taken when servicing equipment in which electron tubes are used.

Some electron tubes, such as high-voltage rectifiers and those used in the high-voltage regulators of television receivers, operate with very high electrode voltages. Extreme care should be taken during testing or adjustment of circuits in which such tubes are employed. Precautions must be exercised during the replacement or servicing of these tubes in equipment to assure that the high voltage output terminal is properly grounded when the tube is being removed from or inserted into its socket or when the top cap connector is being disconnected or connected. The tube and its associated apparatus, especially all parts which may be at high-potential with respect to ground, should be housed in a protective enclosure. The protective housing should be designed with interlocks so that personnel cannot possibly come in contact with any high-potential point in the electrical system.

It should be noted that high voltages may appear at normally low-potential points in the circuit as a result of capacitor breakdown or incorrect circuit connections. Therefore, before any part of the circuit is touched, the power supply switch should be turned off and both terminals of any capacitor should be grounded.

## X-Radiation Warning—Receiving Tubes

Electron tubes that are operated at potentials exceeding several thousand volts may emit X-radiation. The X-radiation is generated when electrons (or ions) which are accelerated to high velocities impact with high energy on various parts of the tube's structure. Tube types which specify an X-radiation characteristic in their published data are designed and controlled for this characteristic.

X-Radiation is measured in accordance with JEDEC Publication No. 67A, "Recommended Practice for Measurement of X-Radiation from Receiving Tubes", and controlled in accordance with JEDEC Publication No. 73A, "Recommended Practice for Quality Control of X-Radiation from High Voltage Rectifier and Shunt Regulator Receiving Tubes". These publications are available from the Electronic Industries Association, 2001 Eye St., N.W., Washington, D.C. 20006.

Operation of these devices above the maximum values indicated in their Maximum Ratings may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

The high voltages associated with these devices result in production of X-radiation which may constitute a health hazard on prolonged exposure at close range unless the tube is adequately shielded. Equipment design must provide for this shielding.

Precautions must be exercised during the servicing of equipment employ-

ing these devices to assure that the high voltage is adjusted to the recommended value and that any shielding components are replaced to their intended positions before the equipment is operated.

### **Shock Hazard Warning— Picture Tubes**

The high voltage at which picture tubes are operated may be very dangerous. Design of the TV receiver should include safeguards to prevent the user from coming in contact with the high voltage. Extreme care should be taken in the servicing or adjustment of any high-voltage circuit.

Caution must be exercised during the replacement or servicing of the picture tube since a residual electrical charge may be contained on the high voltage capacitor formed by the external and internal conductive coatings of the picture tube funnel. To remove any undesirable residual high voltage charges from the picture tube, "bleed off" the charge by shorting the anode contact button, located in the funnel of the picture tube, to the external conductive coating before handling the tube. Discharging the high voltage to isolated metal parts such as cabinets and control brackets may produce a shock hazard.

### **Tube Handling Precaution— Picture Tubes**

Picture tubes should be kept in the shipping box or similar protective container until just prior to installation. Wear heavy protective clothing, including gloves and safety goggles with side shields, in areas containing un-

packed and unprotected tubes to prevent possible injury from flying glass in the event a tube breaks. Handle the picture tube with extreme care. Do not strike, scratch, or subject the tube to more than moderate pressure. On types having an integral safety panel, particular care should be taken to prevent damage to the seal area and the edge of the integral safety panel.

### **Implosion Protection— Picture Tubes**

Picture tubes which employ integral implosion protection must be replaced with a tube of the same type number or an RCA recommended replacement to assure continued safety.

### **X-Radiation Warning— Picture Tubes**

High-voltage electron tubes that operate at potentials exceeding several thousand volts may emit X-radiation. Operation of a television picture tube at abnormal conditions may produce X-radiation in excess of design limits. For radiation safety when servicing a television receiver, it is essential to adjust the high voltage, using an accurate and reliable high-voltage meter, to the value specified by the set manufacturer following his recommended procedure. It is also essential that all external shields are properly replaced. In servicing a television receiver that requires a replacement picture tube, a tube with the same type number or an RCA recommended replacement tube type should be used to assure the same or improved integral X-radiation shielding.

# Interpretation of Tube Data

**T**HE tube data given in the following **Technical Data** section include ratings, typical operation values, characteristics, and characteristic curves.

The values for grid-bias voltages, other electrode voltages, and electrode supply voltages are given with reference to a specified **datum point** as follows: For types having filaments heated with dc, the negative filament terminal is taken as the datum point to which other electrode voltages are referred. For types having filaments heated with ac, the mid-point (*i.e.*, the center tap on the filament-transformer secondary, or the mid-point on a resistor shunting the filament) is taken as the datum point. For types having unipotential cathodes indirectly heated, the cathode is taken as the datum point.

**Ratings** are established on electron tube types to help equipment designers utilize the performance and service capabilities of each tube type to best advantage. Ratings are given for those characteristics which careful study and experience indicate must be kept within certain limits to insure satisfactory performance.

Three rating systems are in use by the electron-tube industry. The oldest is known as the Absolute Maximum system, the next as the Design Center system, and the latest and newest as the Design Maximum system. Definitions of these systems have been formulated by the Joint Electron Device Engineering Council (JEDEC) and standardized by the National Electrical Manufacturers Association (NEMA) and the Electronic Industries Association (EIA) as follows:

**Absolute Maximum** ratings are limiting values which should not be exceeded with any tube of the specified type under any condition of operation. These ratings are not used too often for receiving types, but are generally used for transmitting and industrial types.

**Design Center** ratings are limiting values which should not be exceeded with a tube of the specified type having characteristics equal to the published values under normal operating conditions. These ratings, which include allowances for normal variations in both tube characteristics and operating conditions, were used for most receiving tubes prior to 1957.

**Design Maximum** ratings are limiting values which should not be exceeded with a tube of the specified type having characteristics equal to the published values under any conditions of operation. These ratings include allowances for normal variations in tube characteristics, but do not provide for variations in operating conditions. Design Maximum ratings were adopted for receiving tubes in 1957.

Electrode voltage and current ratings are in general self-explanatory, but a brief explanation of other ratings will aid in the understanding and interpretation of tube data.

**Heater warm-up time** is defined as the time required for the voltage across the heater to reach 80 per cent of the rated value in the circuit shown in Fig. 124. The heater is placed in series with a resistance having a value 3 times the nominal heater operating resistance

( $R = 3 E_r / I_r$ ), and a voltage having a value 4 times the rated heater voltage ( $V = 4 E_r$ ) is then applied. The warm-up time is determined when  $E = 0.8 E_r$ .

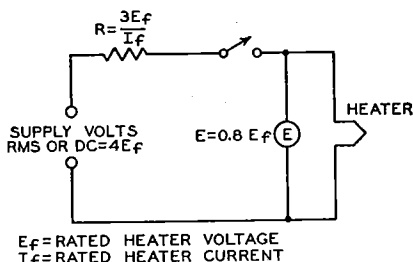


Fig. 124—Test circuit for measuring heater warm-up time.

**Plate dissipation** is the power dissipated in the form of heat by the plate as a result of electron bombardment. It is the difference between the power supplied to the plate of the tube and the power delivered by the tube to the load.

**Peak heater-cathode voltage** is the highest instantaneous value of voltage that a tube can safely stand between its heater and cathode. This rating is applied to tubes having a separate cathode terminal and used in applications where excessive voltage may be introduced between heater and cathode.

**Maximum dc output current** is the highest average plate current which can be handled continuously by a rectifier tube. Its value for any rectifier tube type is based on the permissible plate dissipation of that type. Under operating conditions involving a rapidly repeating duty cycle (steady load), the average plate current may be measured with a dc meter.

The nomograph shown in Fig. 125 can be used to determine tube voltage drop or plate current for any diode unit when values for a single plate-voltage, plate-current condition are available from the data. It can also be used to compare the relative perveance ( $G = I_p / E_b^{3/2}$ ) of several diodes. **Perveance** can be considered a figure of merit for diodes; high-perveance units have

lower voltage drop at a fixed current level.

Tube voltage drop or plate current for a specific diode unit can be determined as follows: First, convenient values are selected for the plate-voltage and plate-current scales of the nomograph. The published plate-current and plate-voltage values are then located on the scales and connected with a straight edge. The intersection of the connecting line with the perveance scale is then used as a pivot point to determine the value of tube voltage drop corresponding to a desired current value, or the value of plate current corresponding to a desired tube voltage drop. Because the pivot point for a specific diode

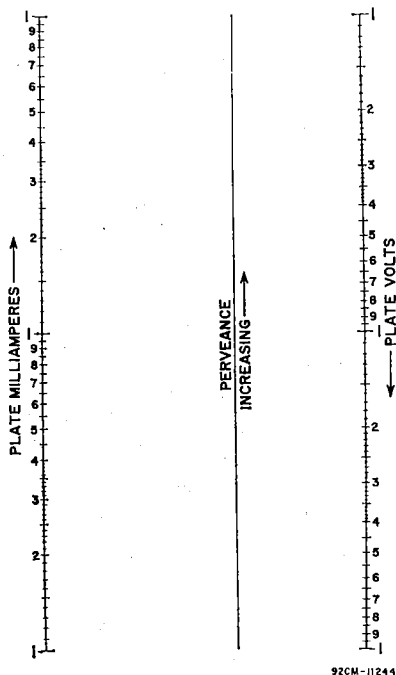


Fig. 125—Diode perveance nomograph.

unit represents its perveance, the pivot points for several units (plotted to the same scales) can be used to compare their relative perveance.

For example, type 5U4GB has a tube voltage drop (per plate) of 44 volts at a plate current of 225 milliamperes. Convenient scales for this type are from 1 to 100 volts for plate voltage and from 10 to 1000 milliamperes for plate current. The points 44 volts and 225 milliamperes are then connected with a straight line to determine the pivot point. Using this pivot point, it is easy to determine such values as a plate current of 150 milliamperes at a tube voltage drop of 33 volts, or a voltage drop of 25 for a current of 100 milliamperes.

For readings in the order of one volt and/or one milliamperere, the nomograph is not accurate because of the effects of contact potential and initial electron velocity.

**Maximum peak plate current** is the highest instantaneous plate current that a tube can safely carry recurrently in the direction of normal current flow. The safe value of this peak current in hot-cathode types of rectifier tubes is a function of the electron emission available and the duration of the pulsating current flow from the rectifier tube in each half-cycle.

The value of peak plate current in a given rectifier circuit is largely determined by filter constants. If a large choke is used at the filter input, the peak plate current is not much greater than the load current; but if a large capacitor is used as the filter input, the peak current may be many times the load current. In order to determine accurately the peak plate current in any rectifier circuit, measure it with a peak-indicating meter or use an oscillograph.

**Maximum peak inverse plate voltage** is the highest instantaneous plate voltage which the tube can withstand recurrently in the direction opposite to that in which it is designed to pass current. For mercury-vapor tubes and gas-filled tubes, it is the safe top value to prevent arc-back in the tube operating within the specified temperature range.

Referring to Fig. 126, when plate A of a full-wave rectifier tube is positive, current flows from A to C, but not from B to C, because B is negative. At the

instant plate A is positive, the filament is positive (at high voltage) with respect to plate B. The voltage between the positive filament and the negative plate B is in inverse relation to that causing current flow. The peak value of this voltage is limited by the resistance and nature of the path between plate B and filament. The maximum value of this voltage at which there is no danger of breakdown of the tube is known as maximum peak inverse voltage.




Fig. 126—Schematic diagram of full-wave rectifier tube and circuit connections.

The relations between peak inverse voltage, rms value of ac input voltage, and dc output voltage depend largely on the individual characteristics of the rectifier circuit and the power supply. The presence of line surges or any other transient, or wave-form distortion, may raise the actual peak voltage to a value higher than that calculated for sine-wave voltages. Therefore, the **actual** inverse voltage, and not the calculated value, should be such as not to exceed the rated maximum peak inverse voltage for the rectifier tube. A calibrated cathode-ray oscillograph or a peak-indicating electronic voltmeter is useful in determining the actual peak inverse voltage.

In single-phase, full-wave circuits with sine-wave input and with no capacitor across the output, the peak inverse voltage on a rectifier tube is approximately 1.4 times the rms value of the plate voltage applied to the tube. In single-phase, half-wave circuits with sine-wave input and with capacitor input to the filter, the peak inverse voltage may be as high as 2.8 times the rms value of the applied plate voltage.

In polyphase circuits, mathematical determination of peak inverse voltage requires the use of vectors.

The **Rating Chart** for full-wave rectifiers presents graphically the relationships between maximum ac voltage input and maximum dc output current derived from the fundamental ratings for conditions of capacitor-input and choke-input filters. This graphical presentation provides for considerable latitude in choice of operating conditions.

The **Operation Characteristics** for a full-wave rectifier with capacitor-input filter show by means of boundary line the limiting current and voltage relationships presented in the Rating Chart.

The **Operation Characteristics** for a full-wave rectifier with choke-input filter not only show by means of boundary line the limiting current and voltage relationships presented in the Rating Chart, but also give some information as to the effect on regulation of various sizes of chokes. The solid-line curves show the dc voltage outputs which would be obtained if the filter chokes had infinite inductance. The long-dash lines radiating from the zero position are boundary lines for various sizes of chokes as indicated. The intersection of one of these lines with a solid-line curve indicates the point on the curve at which the choke no longer behaves as though it had infinite inductance. To the left of the choke boundary line, the regulation curves depart from the solid-line curves as shown by the representative short-dash regulation curves.

**Typical Operation Values.** Values for typical operation are given for many types in the **Technical Data** section. These typical operating values are given to serve as guiding information for the use of each type. These values should not be confused with ratings, because a tube can be used under any suitable conditions within its maximum ratings, according to the application.

The power output value for any operating condition is an approximate

tube output—that is, plate input minus plate loss. Circuit losses must be subtracted from tube output in order to determine the useful output.

**Characteristics** are covered in the **Electron Tube Characteristics** section and such data should be interpreted in accordance with the definitions given in that section. **Characteristic curves** represent the characteristics of an average tube. Individual tubes, like any manufactured product, may have characteristics that range above or below the values given in the characteristic curves.

Although some curves are extended well beyond the maximum ratings of the tube, this extension has been made only for convenience in calculations. Do NOT operate a tube outside of its maximum ratings.

**Interelectrode capacitances** are direct capacitances measured between specified elements or groups of elements in electron tubes. Unless otherwise indicated in the data, all capacitances are measured with filament or heater cold, with no direct voltages present, and with no external shields. All electrodes other than those between which capacitance is being measured are grounded. In twin or multi-unit types, inactive units are also grounded.

The capacitance between the input electrode and all other electrodes, except the output electrode, connected together is commonly known as the input capacitance. The capacitance between the output electrode and all other electrodes, except the input electrode, connected together is known as the output capacitance.

**Hum and noise** characteristics of high-fidelity audio amplifier tube types such as the 7025 and the 7199 are tested in an amplifier circuit such as that shown in Fig. 127. The output of the test circuit is fed into a low-noise amplifier. The bandwidth of this amplifier depends on the characteristic being measured. If hum alone is being tested, a relatively narrow bandwidth is used to include both the line frequency and



the major harmonics generated by the tube under test. In noise or combination hum-and-noise measurements, the bandwidth is defined in the registration of the tube type.




Fig. 127—Test circuit for measuring hum and noise characteristics of high-fidelity audio-amplifier tubes.

The amplifier gain is calibrated so that the vacuum-tube voltmeter measures hum and noise in microvolts referenced to the grid of the tube under test. A pentode can also be evaluated in this manner by the addition of a screen-grid supply adequately bypassed at the tube screen-grid pin connection. Power-supply ripple at the plate of the tube under test must be negligible compared to its hum and noise output. Extraordinary shielding of both the test socket and the associated operating circuit is required to minimize capacitances between heater leads and high-impedance connections.

The test-circuit components are determined by the tube type being tested and the type of hum to be controlled. Heater-cathode hum can be eliminated from the measurement by closing the switch  $S$ . The circuit can also be made more or less sensitive to heater-grid hum by increasing or decreasing the grid resistance  $R_g$ . No circuit changes affect the component of magnetic hum generated by the tube.

**Grid-No. 2 (Screen-grid) Input** is the power applied to the grid-No. 2 electrode and consists essentially of the power dissipated in the form of heat by grid No. 2 as a result of electron bombardment. With tetrodes and pentodes, the power dissipated in the screen-grid circuit is added to the power in the plate circuit to obtain the total B-supply input power.

When the screen-grid voltage is supplied through a series voltage-dropping resistor, the maximum screen-grid voltage rating may be exceeded, provided the maximum screen-grid dissipation rating is not exceeded at any signal condition, and the maximum screen-grid voltage rating is not exceeded at the maximum-signal condition. Provided these conditions are fulfilled, the screen-grid supply voltage may be as high as, but not above, the maximum plate voltage rating. The rating chart on page 300 shows the relationship between the maximum permissible input power to the screen grid and the screen-grid supply voltage.

# Electron Tube Testing

THE electron-tube user—service-man, experimenter, or non-technical radio listener—is interested in knowing the condition of his tubes, since they govern the performance of the device in which they are used. In order to determine the condition of a tube, some method of test is necessary. Because the operating capabilities and design features of a tube are indicated and described by its electrical characteristics, a tube is tested by measuring its characteristics and comparing them with values established as standard for that type. Tubes which read abnormally high with respect to the standard for the type are subject to criticism just the same as tubes which are too low.

Certain practical limitations are placed on the accuracy with which a tube test can be correlated with actual tube performance. These limitations make it impractical for the service man and dealer to employ complex and costly testing equipment having laboratory accuracy. Because the accuracy of the tube-testing device need be no greater than the accuracy of the correlation between test results and receiver performance, and since certain fundamental characteristics are virtually fixed by the manufacturing technique of leading tube manufacturers, it is possible to employ a relatively simple test in order to determine the serviceability of a tube.

In view of these factors, dealers and servicemen will find it economically expedient to obtain adequate accuracy and simplicity of operation by employing a device which indicates the status of a single characteristic. Whether the tube is satisfactory or unsatisfactory is judged from the test result of this single characteristic. Consequently, it is very desirable that the characteristic selected for the test be one which is truly representative of the tube's over-all condition.

The following information and cir-

cuits are given to describe and illustrate general theoretical and practical tube-tester considerations and not to provide information on the construction of a home-made tube tester. In addition to the problem of determining what tube characteristic is most representative of performance capabilities in all types of receivers, the designer of a home-made tester faces the difficult problem of determining satisfactory limits for his particular tester. Getting information of this nature, if it is to be accurate and useful, is a big job. It requires the testing of many tubes of each type, testing of many types, and correlation of the data with performance in many kinds of equipment.

## Short-Circuit Test

The fundamental circuit of a short-circuit tester is shown in Fig. 128. Although this circuit is suitable for tet-




Fig. 128—Fundamental circuit of a short circuit tester.

rodes and types having less than four electrodes, tubes of more electrodes may be tested by adding more indicator lamps to the circuit. Voltages are applied between the various electrodes with lamps in series with the electrode leads. The value of the voltages applied will depend on the type of tube being tested and its maximum ratings. Any two shorted electrodes complete a circuit and light one or more lamps. Since two electrodes may be just touching to give a high-resistance short, it is de-

sirable that the indicating lamps operate on very low current. It is also desirable to maintain the filament or heater of the tube at its operating temperature during the short-circuit test, because short-circuits in a tube may sometimes occur only when the electrodes are heated. However, a short-circuit tester having too high a sensitivity may indicate very-high-resistance shorts that do not adversely affect tube operation.

### Selection of a Suitable Characteristic for Test

Some characteristics of a tube are far more important in determining its operating worth than are others. The cost of building a device to measure any one of the more important characteristics may be considerably higher than that of a device which measures a less representative characteristic. Consequently, three methods of test will be discussed, ranging from relatively simple and inexpensive equipment to more elaborate, more accurate, and more costly devices.

An **emission test** is perhaps the simplest method of indicating a tube's condition. (Refer to *Diodes*, in **Electrons, Electrodes, and Electron Tubes** section, for a discussion of electron emission.) Since emission falls off as the tube wears out, low emission is indicative of the end of tube serviceability. However, the emission test is subject to limitations because it tests the tube under static conditions and does not take into account the actual operation of the tube. On the one hand, coated filaments, or cathodes, often develop active spots from which the emission is so great that the relatively small grid area adjacent to these spots cannot control the electron stream. Under these conditions, the total emission may indicate the tube to be normal although the tube is unsatisfactory. On the other hand, coated types of filaments are capable of such large emission that the tube will often operate satisfactorily after the emission has fallen far below the original value.

Fig. 129 shows the fundamental

circuit diagram for an emission test. All of the electrodes of the tube, except the cathode, are connected to the plate. The filament, or heater, is operated at rated voltage; after the tube has reached con-




Fig. 129—Fundamental circuit of an emission tester

stant temperature, a low positive voltage is applied to the plate and the electron emission is read on the meter. Readings which are well below the average for a particular tube type indicate that the total number of available electrons has been so reduced that the tube is no longer able to function properly.

A **transconductance test** takes into account a fundamental operating principle of the tube. (This fact will be seen from the definition of transconductance in the Section on **Electron Tube Characteristics**.) It follows that transconductance tests, when properly made, permit better correlation between test results and actual performance than does a straight emission test.

There are two forms of transconductance test which can be utilized in a tube tester. In the first form (illustrated by Fig. 130 giving a fundamental circuit with a tetrode under test), appropriate

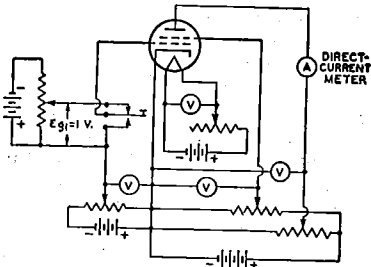


Fig. 130—Fundamental circuit of a transconductance tester using the "grid-shift" method.

operating voltages are applied to the electrodes of the tube. A plate current depending upon the electrode voltages will then be indicated by the meter. If the bias on the grid is then shifted by the application of a different grid voltage, a new plate-current reading is obtained. The difference between the two plate-current readings is indicative of the transconductance of the tube. This method of transconductance testing is commonly called the "grid-shift" method, and depends on readings under static conditions. The fact that this form of test is made under static conditions imposes limitations not encountered in the second form of test made under dynamic conditions.

The dynamic transconductance test illustrated in Fig. 131 gives a fundamental circuit with a tetrode under test. This method is superior to the static transconductance test in that ac voltage

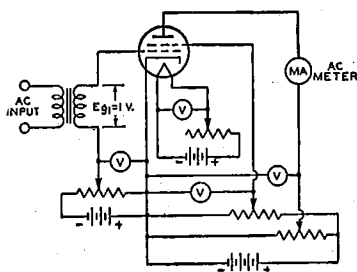


Fig. 131—Fundamental circuit of a dynamic transconductance tester.

is applied to the grid. Thus, the tube is tested under conditions which approximate actual operating conditions. The alternating component of the plate current is read by means of an ac ammeter of the dynamometer type. The transconductance of the tube is equal to the ac plate current divided by the input-signal voltage. If a one-volt rms signal is applied to the grid, the plate-current-meter reading in milliamperes multiplied by one thousand is the value of transconductance in micromhos.

The **power-output test** probably gives the best correlation between test results and actual operating performance of a tube. In the case of voltage amplifiers, the power output is indicative of the amplification and output

voltages obtainable from the tube. In the case of power-output tubes, the performance of the tube is closely checked. Consequently, although more complicated to set up, the power-output test will give closer correlation with actual performance than any other single test.

Fig. 132 shows the fundamental circuit of a power-output test for class A operation of tubes. The diagram illustrates the method for a pentode. The ac output voltage developed across the

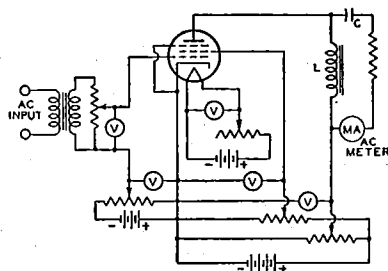


Fig. 132—Fundamental circuit of a power-output tester for class A operation of tubes.

plate-load impedance (L) is indicated by the current meter. The current meter is isolated as far as the dc plate current is concerned by the capacitor (C). The power output can be calculated from the current reading and known load resistance. In this way, it is possible to determine the operating condition of the tube quite accurately.

Fig. 133 shows the fundamental circuit of a power-output test for class




Fig. 133—Fundamental circuit of a power-output tester for class B operation of tubes.

B operation of tubes. With ac voltage applied to the grid of the tube, the current in the plate circuit is read on a dc milliammeter. The power output

of the tube is approximately equal to:

$$(I_b \times R_L) / 0.405,$$

where  $P_o$  is the power output in watts,  $I_b$  is the dc current in amperes, and  $R_L$  is the load resistance in ohms.

### Essential Tube-Tester Requirements

1. The tester should provide for making a short-circuit test before measurement of the tube's characteristics.

2. It is important that some means of controlling the voltages applied to the electrodes of the tube be provided. If the tester is ac operated, a line-voltage control permits the supply of proper electrode voltages.

3. It is essential that the rated voltage applied to the filament or heater be maintained accurately.

4. It is suggested that the characteristics test follow one of the methods described. The method selected and the quality of the parts used in the test will depend upon the user's requirements.

### Tube-Tester Limitations

A tube tester can only indicate the difference between a tube characteristic and those which are standard for that type. Because the operating conditions imposed upon a tube may vary within wide limits, it is impossible for a tube tester to evaluate tubes for all applications.

Commercially available tube checkers vary widely in purpose, performance, and significance of results. They range from relatively inexpensive portable units to costly laboratory-quality instruments. Design trade-offs are made by tube checker manufacturers to provide a product simple to operate, capable of testing a wide variety of tube types, and in some cases, low in cost. Accuracy of readings, completeness of testing, and even proper testing conditions for certain tube types are sometimes sacrificed in these trade-offs. Recognition of the individual tester limitations are absolutely necessary before valid judgments on tube quality can be made from test results.

Tube checkers generally make two types of evaluations: tests for inter-

element shorts (leakage) and an electrical test of quality that is either an ac cathode-emission test or a more complex large-signal transconductance test.

The shorts or leakage tests are often more sensitive than those of the tube manufacturer and also, in some cases more stringent than circuit application requirements. Leakage sensitivity of 100 megohms between elements is available in some tube checkers. Some can be adjusted by the user to even higher sensitivities. Many tube checkers tie several elements together to test many parallel paths in a single test position. As a result, multiple paths having individual inter-element leakage resistances which are acceptable result in parallel combinations which cause the tube to read as defective.

Quality-test interpretations must be tempered by knowledge of the character of the quality test. Large-signal transconductance ( $g_m$ ) often does not correlate with small-signal transconductance, or the control limits for applications that require this characteristic. Cathode emission, as read on many tube checkers, is a function of both the emitting capability of the cathode and the mechanical spacing of the tube's internal parts. While high cathode emitting capability is generally desirable for all tubes, a high emission reading obtained by close mechanical spacing of parts can result in a false indication of good quality. In addition, high or low indications in a tube checker are often caused by compromise test conditions rather than the quality of the tube being tested.

The set-up instruction and charts furnished by the tester manufacturer establish the conditions and limits which the tester manufacturer considers adequate for the tube types evaluated. These conditions and limits are usually established independently of the tube manufacturer and without consideration of application requirements.

The tube tester cannot be looked upon as a final authority in determining whether or not a tube is satisfactory. An actual operating test in the application will give the best possible indication of a tube's worth.

# Application Guide for RCA Receiving Tubes

In the Application Guide on the following pages, RCA receiving tubes are classified in two ways: (a) by function, and (b) by structure (diode, triode, etc.). The functional classification covers 27 principal types of application, as listed below.

Tube types are grouped by structure under each classification; they are also keyed to indicate miniature, octal, novistor, duodecar, and novar types.

Triodes are designated as *low-*, *medium-*, or *high-mu* types on the following basis: *low*, less than 10; *medium*, 10 or more, but less than 50; *high*, 50

or more. Where applicable, tubes are designated as *sharp-*, *semiremote-*, or *remote-cutoff* on the basis of the ratio, in per cent, of the negative control-grid voltage to the screen-grid voltage (or, for triodes, the plate voltage) for cutoff, as given in the characteristics or typical operation values. These terms are defined as follows: *sharp*, less than 10 per cent; *semiremote*, 10 or more, but less than 20 per cent; *remote*, 20 per cent or more.

For more complete data on these types, refer to the **Technical Data For RCA Receiving Tubes**.

## APPLICATIONS

- |   |   |
|---|---|
| 1. Audio-Frequency Amplifiers                                 | 15. Pentagrid Converters                                    |
| 2. Automatic Gain Control Circuits (AGC and AVC)              | 16. Mixer-Oscillators—RF                                    |
| 3. Blankers   | 17. Multivibrators  |
| 4. Burst Amplifiers   | 18. Oscillators   |
| 5. Chroma Amplifiers  | 19. Phase Splitters   |
| 6. Color Killers  | 20. Radio-Frequency Amplifiers                              |
| 7. Color Matrixing Circuits                                   | 21. Reactance Circuits                                      |
| 8. Dampers  | 22. Rectifiers (Vacuum)                                     |
| 9. Demodulators (Color TV)                                    | 23. Regulators (High Voltage)                               |
| 10. Detectors (AM)  | 24. Sync Separators and Amplifiers                          |
| 11. Discriminators (Detectors)                                | 25. Tuning Indicators                                       |
| 12. Horizontal-Deflection Circuits (Oscillator and Amplifier) | 26. Vertical-Deflection Circuits (Oscillator and Amplifier) |
| 13. Intermediate-Frequency Amplifiers                         | 27. Video Amplifiers  |
| 14. Limiters  |   |

## 1. AUDIO-FREQUENCY AMPLIFIERS

### Voltage Amplifiers

Medium-Mu Triode—Sharp-Cutoff Pentode  
• 7199†

Medium-Mu Twin Triode  
• 6SN7GTB      • 12SN7GTA  
• 12AU7A/ECC82

### Twin Diode—High-Mu Triode

• 4AV6      • 6BN8      • 12AV6  
• 6AT6      • 8BN8      • 14GT8  
• 6AV6      • 12AT6

### Triple Diode—High-Mu Triode

• 5T8      • 6T8A      • 19T8

• Miniature

◊ Octal

† For high-fidelity equipment

**High-Mu Twin Triode**

- 6EU7†      • 12AX7A/      ○ 12SL7GT
- 6SL7GT      ECC83†      • 7025†

**Sharp-Cutoff Pentode**

- 6AU6A      • 5879†
- 6HS6      • 7543†

*Power Amplifiers***Beam Power Tube**

- 5AQ5      ○ 6Y6GA/6Y6G      • 25C5
- 6AQ5A      • 11DS5      • 35C5
- 6AS5      • 12AB5      • 50C5
- 6CU5      • 12AQ5      ○ 50L6GT
- 6DS5      • 12CA5      • 6973†
- 6GC5      • 12CU5/12C5      • 7027A†
- 6L6      ○ 12V6GT      ○ 7355†
- 6L6GC†      ○ 12W6GT      ○ 7408†
- 6V6GTA      • 17CU5/17C5      ○ 7581A†
- 6W6GT

**Beam Power Tube—Sharp-Cutoff Pentode**

- ‡ 6AD10      ‡ 6T10\*      ‡ 12BF11\*
- ‡ 6AL11      ‡ 12AL11      ‡ 17BF11\*
- ‡ 6BF11\*

**Power Pentode**

- 6BQ5/EL34      • 10BQ5      • 35EH5
- 6EH5      • 10GK6      • 50EH5
- 6F6      • 12FX5      • 60FX5
- 6GK6      • 16GK6      • 7189†
- 6K6GT      • 19FX5      ▲ 7868†
- 8BQ5      • 25EH5      ○ 7591A

**2. AUTOMATIC GAIN CONTROL CIRCUITS (AGC & AVC)****Twin Diode—High-Mu Triode**

- 4AV6      • 6AV6      • 12AV6
- 6AT6      • 12AT6

**Medium-Mu Triode—Sharp-Cutoff Pentode**

- 5AN8      • 6AZ8      • 6GH8A
- 5GH8A      • 6BA8A      • 9GH8A
- 6AN8A

**High-Mu Triode—Sharp-Cutoff Pentode**

- 6AW8A      • 6LC8      • 8KA8
- 6HF8      • 8AW8A      • 8LC8
- 6JV8      • 8JV8      • 10HF8
- 6KA8

**Sharp-Cutoff Twin Pentode**

- 3BU8/      • 4HS8      • 6HS8
- 3GS8      • 6BU8

**Sharp-Cutoff Pentode\***

- 6GY6/6GX6

**Pentagrid Amplifier**

- 3BY6      • 4CS6      • 6CS6
- 3CS6      • 6BY6

**3. BLANKERS****Medium-Mu Triode—Sharp-Cutoff Pentode**

- 5GH8A      • 6MQ8      • 9GH8A
- 6GH8A

**Medium-Mu Twin Triode**

- 6FQ7/6CG7      • 8FQ7/8CG7      • 12BH7A
- 6GU7      • 8GU7      • 12FQ7

**Medium-Mu Triode—Semiremote-Cutoff Pentode**

- 6LM8

**High-Mu Triode—Sharp-Cutoff Pentode**

- 6KT8

**4. BURST AMPLIFIERS****Medium-Mu Triode—Sharp-Cutoff Pentode**

- 5EA8      • 6EA8      • 9GH8A
- 5GH8A      • 6GH8A      • 19EA8

**Medium-Mu Triode—Semiremote-Cutoff Pentode**

- 6LM8      • 6MU8

**Twin Diode—High-Mu Triode**

- 6BN8      • 8BN8

**Sharp-Cutoff Pentode**

- 3CB6/3CF6      • 4EW6      • 6CB6A/6CF6
- 3JC6A      • 4JC6A      • 6EW6
- 4CB6      • 5EW6      • 6JC6A

**5. CHROMA AMPLIFIERS****Medium-Mu Triode—Sharp-Cutoff Pentode**

- 5GH8A      • 6HL8      • 9GH8A
- 6GH8A      • 6MQ8

**High-Mu Triode—Sharp-Cutoff Pentode**

- 6AW8A      • 6LF8
- 6KT8      • 8AW8A

**Medium-Mu Twin Triode**

- 6FQ7/6CQ7      • 8FQ7/8CG7      • 12BH7A
- 6GU7      • 8GU7      • 12FQ7

**6. COLOR KILLERS****Quadruple Diode**

- 6JU8A      • 8JU8A

**Medium-Mu Triode—Sharp-Cutoff Pentode**

- 5GH8A      • 6MQ8      • 9GH8A
- 6GH8A

**High-Mu Triode—Sharp-Cutoff Pentode**

- 6KT8

## 7. COLOR MATRIXING CIRCUITS

## Medium-Mu Twin Triode

- 6FQ7/6CG7    • 8GU7            • 12FQ7
- 6GU7            • 12AZ7
- 8FQ7/8CG7    • 12BH7A

## Medium-Mu Triode—Sharp Cutoff Pentode

- 5GH8A            • 6GH8A            • 9GH8A

## Medium-Mu Triple Triode

- ▲ 6MD8            ‡ 6MJ8            ▲ 12MD8

## High-Mu Triple Triode

- ‡ 6MN8

## Twin Pentode

- 6LE8            • 10LE8            • 15LE8

## Quadruple Diode

- 6JU8A            • 8JU8A

## Sharp-Cutoff Pentode

- 3CB6/3CF6    • 6CB6A/6CF6
- 4CB6

## 8. DAMPERS

## Half-Wave (Diode)

- |              |            |           |
|--------------|------------|-----------|
| ○ 6AU4GTA    | ○ 6DM4A/   | ‡ 17BE3/  |
| ○ 6AX4GTB    | 6DA4       | 17BZ3     |
| ▲ 6BA3       | ▲ 6DN3     | • 17BR3/  |
| ‡ 6BE3       | ▲ 6DW4B    | 17RK19    |
| ▲ 6BS3A      | • 12AF3/   | ▲ 17BS3A/ |
| ‡ 6CE3/6CD3/ | 12BR3/     | 17DW4A    |
| 6DT3         | 12RK19     | ‡ 17BW3   |
| ‡ 6CG3/6BW3/ | ○ 12AX4GTB | • 17CT3   |
| 6DQ3         | ▲ 12AY3A   | ○ 17DE4   |
| ▲ 6CJ3/      | ‡ 12BE3    | ○ 17DM4A  |
| 6CH3         | ▲ 12BS3A/  | ▲ 19DK3   |
| ▲ 6CL3/      | 12DW4A     | ‡ 22BW3   |
| 6CK3         | ▲ 12CL3    | ○ 22DE4   |
| ▲ 6CM3       | ▲ 12CM3    | • 25CT3   |
| ○ 6DE4/      | ▲ 12DL3    | ▲ 25DL3   |
| 6CQ4         | ○ 17AX4GTA | ‡ 34CE3   |
| ▲ 6DL3       | ▲ 17AY3A   |           |

## Half-Wave (Diode)—Horizontal-Deflection Amplifier

- ‡ 33GY7A            ‡ 38HK7            ‡ 53HK7
- ‡ 38HE7            ‡ 50GY7A

## 9. DEMODULATORS (COLOR TV)

## Medium-Mu Twin Triode

- 12BH7A            • 12AZ7A

## Medium-Mu Triode—Sharp-Cutoff Pentode

- 5GH8A            • 6MQ8            • 9GH8A
- 6GH8A

## High-Mu Twin Triode

- 12AZ7A

## Sharp-Cutoff Pentode\*

- 5HZ6            • 6GY6/6GX6 ‡ 12BV11
- ‡ 6BV11            • 6HZ6

## Pentagrid Amplifier

- 6BY6

## Twin Pentode

- 6LE8            • 10LE8            • 15LE8

## Beam Deflection Tube

- 6JH8            • 6ME8

## 10. DETECTORS (AM)

## Diode—Sharp-Cutoff Pentode

- 5AM8            • 6AM8A            • 6AS8

## Twin Diode

- 3AL5            • 6AL5            • 12AL5

## Twin Diode—High-Mu Triode

- 4AV6            • 6BN8            • 12AT6
- 6AT6            • 6CN7            • 12AV6
- 6AV6            • 8BN8            • 14GT8

## Triple Diode—High-Mu Triode

- 5T8            • 6T8A            • 19T8

## Quadruple Diode

- 6JU8A            • 8JU8A

## 11. DISCRIMINATORS (DETECTORS)

## FM

## Twin Diode

- 3AL5            • 6AL5            • 12AL5

## Twin Diode—High-Mu Triode

- 6BN8

## Triple Diode—High-Mu Triode

- 5T8            • 6T8A            • 19T8

## Beam Tube

- 3BN6            • 4BN6            • 6BN6/6KS6

## Beam Power Tube—Sharp-Cutoff Pentode

- ‡ 6AD10            ‡ 6T10            ‡ 12BF11
- ‡ 6AL11            ‡ 6Z10/6J10    ‡ 13Z10/13J10
- ‡ 6BF11            ‡ 12AL11            ‡ 17BF11

## FM Quadrature-Grid

## Sharp-Cutoff Pentode\*

- 3DT6A            • 5HZ6            • 6GY6/6GX6
- 4DT6A            • 6DT6A            • 6HZ6

## Beam Tube

- 3BN6            • 4BN6            • 6BN6/6KS6



*Horizontal AFC*

## Twin Diode—High-Mu Triode

- 6BN8      • 8BN8      • 8CN7
- 6CN7

## Twin Diode—Medium-Mu Twin Triode

- ‡ 6B10      ‡ 8B10

## Twin Diode—Sharp Cutoff Pentode

- 6LT8      • 8LT8      • 11LT8

## 12. HORIZONTAL-DEFLECTION

*Oscillators*

## Medium-Mu Triode—Sharp-Cutoff Pentode

- 5GH8A    • 6GH8A    • 9GH8A

## Twin Diode—Medium-Mu Twin Triode

- ‡ 6B10      ‡ 8B10

## Three Unit Triode

- ‡ 6U10

## Medium-Mu Twin Triode

- 6FQ7/6CG7   • 12AU7A/   • 12FQ7
- 6SN7GTB    • ECC82    • 12SN7GTA
- 8FQ7/8CG7   • 12BH7A

*Horizontal-Deflection Amplifiers*

## Beam Power Tube

- 6AU5GT    ‡ 6KN6      ▲ 22JG6A
- 6AV5GA    ‡ 6LB6      ▲ 22JR6
- 6BQ6GTB/   ▲ 6LQ6/    ▲ 22KM6
- 6CU6      6JE6C      ▲ 24LQ6/
- 6CB5A      ‡ 6LR6      24JE6C
- 6CD6GA    ▲ 6ME6      • 25AV5GA
- 6DQ5      • 12AV5GA   • 25BQ6GTB/
- ▲ 6GJ5A      • 12BQ6GTB/   25CU6
- ▲ 6GT5A      12CU6      • 25CD6GB
- 6GW6/    ▲ 12JB6A    • 25DN6
- 6DQ6B    ▲ 12JT6A    ‡ 31JS6C
- ▲ 6JB6A    ▲ 17GJ5A    ▲ 31LQ6
- ▲ 6JF6      ▲ 17GT5A    ▲ 31LZ6
- ▲ 6JG6A    • 17GW6/    ‡ 35LR6
- ‡ 6JM6A      17DQ6B    ‡ 36KD6/
- ▲ 6JR6      ▲ 17JB6A    40KD6
- ‡ 6JS6C      ▲ 17JG6A    ▲ 36MC6
- ▲ 6JT6A    ‡ 17JM6A    ‡ 38HK7
- ▲ 6JU6      ▲ 17JT6A    ‡ 42KN6
- ▲ 6KM6      ▲ 22JF6

## 13. INTERMEDIATE-FREQUENCY AMPLIFIERS

## Medium-Mu Triode—Sharp-Cutoff Pentode

- 5AN8      • 6AZ8      • 6MQ8
- 5GH8A    • 6BA8A    • 8AU8A
- 6AN8A    • 6HL8     • 9GH8A
- 6AU8A    • 6GH8A

## High-Mu Triode—Sharp-Cutoff Pentode

- 6AW8A    • 6KV8      • 10GN8
- 6EB8      • 8AW8A    • 10HF8
- 6GN8      • 8GN8/    • 10JA8/
- 6HF8      8EB8      10LZ8
- 6JV8      • 8JV8      • 11KV8
- 6KT8

## Sharp-Cutoff Pentode

- 3AU6      • 4JC6A      • 6DE6
- 3BC5/    • 4JD6      • 6DK6
- 6CE5      • 5EW6      • 6EJ7/
- 3CB6/    • 6AG5      EF184
- 3CF6      • 6AK5/      • 6EW6
- 3DK6      EF95      • 6HS6
- 3JC6A    • 6AU6A    • 6JC6A
- 4AU6      • 6BC5/    • 6JD6
- 4CB6      6CE5      • 12AU6
- 4DE6      • 6CB6A/   • 12DK6
- 4DK6      6CF6
- 4EW6      • 6DC6

## Diode—Sharp-Cutoff Pentode

- 5AM8      • 6AM8A    • 6AS8

## Semiremote-Cutoff Pentode

- 3BZ6      • 4JH6      • 6GM6
- 3EH7/    • 4KT6      • 6HR6
- XF183    • 5GM6      • 6JH6
- 3KT6      • 6BZ6      • 6KT6
- 4BZ6      • 6EH7/    • 12BZ6
- 4EH7/    EF183      • 19HR6
- LF183

## Remote-Cutoff Pentode

- 6BA6/    • 12BA6
- EF93

## 14. LIMITERS

- 3AU6      • 4JD6      • 6DE6
- 3BC5/3CE5   • 5EW6      • 6DK6
- 3CB6/3CF6   • 6AG5      • 6EJ7/
- 3DK6      • 6AK5/      EF184
- 3JC6A      EF95      • 6EW6
- 4AU6      • 6AU6A    • 6HS6
- 4CB6      • 6BC5/    • 6JC6A
- 4DE6      6CE5      • 6JD6
- 4DK6      • 6CB6A/   • 12AU6
- 4EW6      6CF6      • 12DK6
- 4JC6A      • 6DC6

## 15. PENTAGRID CONVERTERS

- 6BA7      • 6BE6      • 12BE6

## 16. MIXER-OSCILLATORS—RF

## Medium-Mu Triode—Sharp-Cutoff Tetrode

- 5CL8A    • 6CL8A    • 19JN8/
- 6CQ8    • 6CQ8    19CL8A

• Miniature

• Octal

▲ Novar

‡ Duodecax

\* Dual-control grids

**Medium-Mu Triode—Sharp-Cutoff Pentode**

- 4KE8      • 5U8      • 6KZ8
- 5AT8      • 5X8      • 6U8A/
- 5B8      • 6AT8A      • 6KD8
- 5BR8/      • 6BR8A/      • 6X8A
- 5FV8      6FV8A      9KZ8
- 5CG8      • 6EA8      • 9U8A
- 5EA8      • 6FG7      • 19EA8
- 5FG7      • 6HB7      • 19X8
- 5KE8      • 6KE8

**High-Mu Twin Triode**

- 6DT8      • 12AT7/      • 12DT8
- ECC81

**17. MULTIVIBRATORS****Medium-Mu Triode—Sharp-Cutoff Pentode**

- 5GH8A      • 6GH8A      • 9GH8A

**Medium-Mu Twin Triode**

- 5J6      • 8FQ7/8CG7      • 12BH7A
- 6FQ7/6CG7      • 8GU7      • 12SN7-
- 6GU7      • 9AU7      GTA
- 6J6A      • 12AU7A/      • 12FQ7
- 6SN7GTB      ECC82      • 19J6
- 7AU7

**High-Mu Twin Triode**

- 12AX7A/ ECC83

**18. OSCILLATORS***Radio Frequency—UHF***Medium-Mu Triode**

- 2AF4B/      • 3AF4A/      Δ 6DV4
- 2DZ4      3DZ4      • 6DZ4
- Δ 2DV4      • 6AF4A/
- 6DZ4

*Radio Frequency—VHF***Medium-Mu Twin Triode**

- 5J6      • 6J6A      • 19J6

**High-Mu Triode**

- 6AB4

**Power Triode**

- 6C4 (Class C)

*3.58-MHz (Color TV)***Medium-Mu Triode—Sharp-Cutoff Pentode**

- 5GH8A      • 6GH8A      • 9GH8A

**High-Mu Triode—Sharp-Cutoff Pentode**

- 6KT8

**19. PHASE SPLITTERS****Medium-Mu Twin Triode**

- 6FQ7/6CG7      • 8FQ7/8CG7      • 12BH7A
- 6GU7      • 8GU7      • 12FQ7
- 6SN7GTB      • 9AU7      • 12SN7-
- 7AU7      • 12AU7A/      GTA
- ECC82

**High-Mu Triode—Sharp-Cutoff Pentode**

- 6AW8A      • 8AW8A      • 10GN8
- 6EB8      • 8GN8/      • 10HF8
- 6GN8      8EB8      • 10JA8/
- 6HF8      10LZ8

**High-Mu Twin Triode**

- 6SL7GT      • 12AX7A/      • 12SL7GT
- ECC83      • 7025

**Medium-Mu Triode—Sharp-Cutoff Pentode**

- 5EA8      • 6GH8A      • 7199†
- 5GH8A      • 9GH8A      • 19EA8
- 6EA8

**20. RADIO-FREQUENCY AMPLIFIERS****Medium-Mu Triode**

- 2BN4A      • 6BC4      • 6BN4A
- 3BN4A

**Medium-Mu Triode—Sharp-Cutoff Tetrode**

- 6CQ8

**Medium-Mu Twin Triode**

- 4BC8      • 5BQ7A      • 6BQ7A/
- 4BQ7A/      • 6BC8/      6BZ7/
- 4BZ7      6BZ8      6BS8
- 5BK7A      • 6BK7B

**High-Mu Triode**

- Δ 2CW4      • 3FH5      Δ 6DS4
- Δ 2DS4      • 3GK5      • 6ER5
- Δ 2EG4      3HMS/3HA5      • 6FH5
- 2FH5      • 3HQ5      • 6GK5/
- 2GK5/      • 4GK5      6FQ5A
- 2FQ5A      • 4HQ5      • 6HMS/6HA5
- 2HQ5      • 6AB4      • 6HQ5
- 3ER5      Δ 6CW4      Δ 13CW4

**High-Mu Twin Triode**

- 6DT8      • 12DT8

**Power Triode**

- 6C4 (Class C)

**Sharp-Cutoff Tetrode**

- 2CY5      • 3CY5      • 6CY5

**Sharp-Cutoff Pentode**

- 3AU6      • 6AG5      • 6CB6A/
- 3CB6/      • 6AK5/      6CF6
- 3BC5/3CE5      EF95      • 6DC6
- 3CF6      • 6AU6A      • 6DE6
- 4AU6      • 6BC5/      • 12AU6
- 4CB6      • 6CE5
- 4DE6      • 6BH6

**Remote-Cutoff Pentode**

- 6BA6/      • 6BJ6      • 12BA6
- EF93

## 21. REACTANCE CIRCUITS

## Medium-Mu Triode—Sharp-Cutoff Pentode

- 5AN8      • 6AZ8      • 6GH8A
- 5GH8A    • 6BA8A    • 9GH8A
- 6AN8A

## Twin Diodes—High-Mu Triode

- 6CN7      • 8CN7

## High-Mu Triode—Sharp-Cutoff Pentode

- 6AW8A    • 8AW8A

## 22. RECTIFIERS (VACUUM)

*Power-Supply Types*

## Half-Wave (Diode)

- 35W4      ○ 35Z5GT

## Full-Wave (Twin Diode)

- 3DG4      ○ 5V4GA      • 6X4
- 5AS4A    ○ 5Y3GT      ○ 6X5GT
- ▲ 5BC3A    • 6CA4      • 12X4
- 5U4GB

*High-Voltage Types*

## Half-Wave (Diode)

- 1AY2A    ‡ 2BU2/      ‡ 3BW2/
- IG3GTA/    2AH2      3BS2A/
- 1B3GT      • 3A2      3BT2
- 1K3A/    ○ 3A3C      ○ 3CN3B
- 1J3      ‡ 3AT2B    ○ 3CU3A
- 1V2      ‡ 3AW2A    ○ 3CZ3A
- 1X2C    ‡ 3BN2A    ○ 3DB3/
- ‡ 2AS2A         ○ 3CY3
- 2AV2         ○ 3DC3
- 3DJ3

## 23. REGULATORS

## (HIGH VOLTAGE)

## Beam Triode—Shunt Type

- 6BK4C/      ○ 6EN4      ○ 6LJ6A/
- 6EL4A                6LH6A

## Beam Power Tube—Pulse Type

- ‡ 6HS5      ▲ 17KV6A    ▲ 22KV6A
- ▲ 6KV6A

24. SYNC SEPARATORS  
AND AMPLIFIERS

## High-Mu Twin Triode

- 12BZ7

## Medium-Mu Triode—Sharp-Cutoff Tetrode

- 6CQ8

## Sharp-Cutoff Twin Pentode

- 3BU8/      • 4HS8      • 6HS8
- 3GS8      • 6BU8

## Pentagrid Amplifier

- 3BY6      • 4CS6      • 6CS6
- 3CS6      • 6BY6

## High-Mu Triode—Sharp-Cutoff Pentode

- 6KT8

Medium-Mu Triode—Sharp-Cutoff Pentode  
(Video Output)

- 6CX8      • 8CX8      • 11LQ8
- 6LQ8

## Medium-Mu Triode—Sharp-Cutoff Pentode

- 5AN8      • 6AZ8      • 6HL8
- 5GH8A    • 6BA8A    • 6MQ8
- 6AN8A    • 6CU8      • 8AU8
- 6AU8A    • 6GH8A    • 9GH8A

## Medium-Mu Twin Triode

- 6FQ7/6CG7    • 12AU7A/    • 12FQ7
- 8FQ7/8CG7         ECC82

## Twin Diode—High-Mu Triode

- 6CN7      • 8CN7

High-Mu Triode—Sharp-Cutoff Pentode  
(Video Output)

- 6AW8A      • 6KT8      • 8KA8
- 6EB8      • 6KV8      • 8LC8
- 6GN8      • 6LC8      • 10GN8
- 6GW8/      • 8AW8A    • 10HF8
- ECL86      • 8GN8/    • 10JA8/
- 6HF8      8EB8      10LZ8
- 6JV8      • 8JV8      • 11KV8
- 6KA8

## 25. TUNING INDICATORS

## Indicator with Triode Unit

- 6E5      6U5

## Twin Indicator Units

- 6AF6G

26. VERTICAL-DEFLECTION  
CIRCUITS*Oscillators and Amplifiers (Combined)*

## Medium-Mu Triode—Low-Mu Triode

- 6DE7      • 10EW7      • 13DE7
- 6EW7      • 10DE7

## Medium-Mu Dual Triode

- 6CM7      • 8CM7      • 8CS7
- 6CS7

## Medium-Mu Twin Triode

- 6FQ7/6CG7    • 8FQ7/8CG7    • 12FQ7

• Miniature      ○ Octal      ▲ Novar

‡ Duodecar

## High-Mu Triode—Low-Mu Triode

- 6CY7
- 6DR7
- ◉ 6EM7/
- 6EA7
- ▲ 6FD7
- ▲ 6GF7A
- 10DR7
- ◉ 10EM7
- ▲ 10GF7A
- 13DR7
- ◉ 13EM7/
- 15EA7
- ◉ 13FM7/
- 15FM7
- ▲ 13FD7
- ▲ 13GF7A

## High-Mu Triode—Beam Power Tube

- ▲ 6KY8A
- ▲ 15KY8A

## Dual Triode

- ◉ 6EM7/
- 6EA7
- ▲ 6GF7A
- ◉ 13EM7/
- 15EA7

## Dual Triode—Beam Power Tube

- ‡ 23Z9

## Medium-Mu Triode—Power Pentode

- ‡ 6JZ8
- ▲ 6LR8
- ‡ 6LU8
- ‡ 16LU8
- ‡ 17JZ8
- ▲ 21LR8
- ‡ 21LU8
- ‡ 24JZ8
- ‡ 25JZ8
- ▲ 31LU8

*Amplifiers*

## Low-Mu Triode

- 12B4A

## Medium-Mu Triode

- 6S4A

## Beam Power Tube

- 5AQ5
- 5CZ5
- 6AQ5A
- 6CZ5
- 6DS5
- 6EM5
- ‡ 6JB5/
- 6HE5
- 6JQ6#
- ◉ 6V6
- ◉ 6V6GTA
- 8EM5
- 11DS5
- 12AQ5
- 12JQ6#
- ◉ 12V6GT
- 17JQ6#

## Power Pentode

- 6GK6
- ◉ 6K6GT
- 10GK6
- 16GK6

## 27. VIDEO AMPLIFIERS

## Medium-Mu Triode—Sharp-Cutoff Pentode

- 5AN8
- 5GH8A
- 6AN8A
- 6AU8A
- 6AZ8
- 6BA8A
- 6GH8A
- 6HL8
- 6MQ8
- 8AU8
- 9GH8A

Medium-Mu Triode—Sharp-Cutoff Pentode  
(Video Output)

- 6CX8
- 6LQ8
- 8CX8
- 11LQ8

High-Mu Triode—Sharp Cutoff Pentode  
(Video Output)

- 6AW8A
- 6EB8
- 6GN8
- 6HF8
- 6JV8
- 6KV8
- 6LF8
- 8AW8A
- 8GN8/
- 8EB8
- 8JV8
- 10GN8
- 10HF8
- 10JA8/
- 10LZ8
- 11KV8

## Sharp-Cutoff Pentode (Video Output)

- 6AG7
- 6CL6
- 6GK6
- 6JG5
- 7KY6
- 10GK6
- 11HM7
- 12BY7A/
- 12BV7/
- 12DQ7
- 12HG7
- 12HG7/
- 12GN7A
- 12HL7

## Diode—Sharp-Cutoff Pentode

- 5AM8
- 6AM8A
- 6AS8

## High-Mu Triode—Sharp-Cutoff Pentode

- 6KT8

## Sharp-Cutoff Pentode

- 3JC6A
- 4JC6A
- 6JC6A

• Miniature

◉ Octal

▲ Novar

‡ Duodecar

# With an integral diode

# Technical Data for RCA

## Receiving Tubes

### Entertainment and Industrial Types

This section contains technical data for RCA receiving tubes, intended for use in many diverse entertainment and industrial applications such as standard broadcast, FM, television receiver, audio amplifier, on-off control, voltage regulator, and voltage reference. Detailed data are presented on popular types. Essential information on less active types and on discontinued types in which there still may be some interest is given in chart form at the end of the section.

Tube types are listed in this section according to the numerical-alphabetical-numerical sequence of their type designations. Tube types which have superseding versions are cross-referenced to active types. In addition, an alpha-numeric listing of foreign type designations is included at the end of this data section.

A grid-No. 2 input rating chart for certain voltage-amplifier types, as specified in the technical data, is shown on page 300. **Safety Precautions** are given on page 93. Characteristics for RCA television picture tubes for replacement use are given in **RCA Picture Tube Characteristics Charts**.

When choosing types for the design of new electronic equipment, the designer should refer to the **Application Guide for RCA Receiving Tubes** which starts on page 104.

To expedite the preliminary search for interchangeable tube types, the section **Terminal Diagrams**, which starts on page 594, includes a comprehensive listing of domestic and foreign tube types having the same basing arrangement. The **Key To Terminal Diagrams** is given on page 612.

Two replacement guides are also included. A **Replacement Guide—Entertainment Receiving Types** and a **Replacement Guide—Industrial Receiving Types** are given on pages 648 and 654 respectively.

**OA2****INDUSTRIAL  
TYPE****VOLTAGE REGULATOR**

Miniature type cold-cathode, glow-discharge tube used in voltage regulator applications. Outlines section, 5D; requires miniature 7-contact socket.

**MAXIMUM RATINGS (Absolute-Maximum Values)**

|   |            |    |
|---|------------|----|
| Average Starting Current <sup>♦</sup> ..... | 75         | mA |
| DC Cathode Current .....                    | 30         | mA |
| Frequency .....                             | 5 min      | mA |
| Ambient-Temperature Range .....             | 0          | Hz |
|   | -55 to +90 | °C |

**MAXIMUM CIRCUIT VALUES**

|                       |                              |    |
|-----------------------|------------------------------|----|
| Shunt Capacitor ..... | 0.1                          | μF |
| Series Resistor ..... | See Operating Considerations |    |

**CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN**

|                               | Min.             | Av. | Max. |       |
|-------------------------------|------------------|-----|------|-------|
| DC Anode-Supply Voltage ..... | 185 <sup>■</sup> | —   | —    | volts |
| Anode Breakdown Voltage ..... | —                | 156 | 185* | volts |
| Anode Voltage Drop .....      | 140 <sup>●</sup> | 151 | 168* | volts |
| Regulation (5 to 30 mA) ..... | —                | 2   | 6*   | volts |

<sup>♦</sup> Averaged over starting period not exceeding 10 seconds. This starting period must be followed by a steady-state operating condition of at least 20 minutes, or tube performance will be impaired.

<sup>■</sup> Not less than indicated supply voltage should be provided to insure "starting" throughout tube life.

\* Maximum individual tube value during useful life.

● Minimum individual tube value during useful life.


**Operating Considerations**

Sufficient resistance must always be used in series with the tube to limit the current through the tube. The value for the series resistor is dependent on the maximum anode-supply voltage and the ratio of the current through the load to the operating current of the tube, and should be chosen to limit the operating current through the tube to the maximum rated value at all times after the starting period.


The maximum load current that can be regulated by the tube is determined by the minimum and maximum values of the supply voltage. After the value of series resistor for the maximum supply voltage has been calculated as indicated above, it is then in order to determine if this value will permit adequate starting voltage when the supply voltage falls to its minimum value. If adequate starting voltage is not obtained, a new load current of lower value must be used and the calculations repeated. It will be apparent from such calculations that the higher the minimum supply voltage and the smaller the difference between its minimum and maximum values, the higher will be the load current that can be regulated.

When equipment utilizing the tube is "turned on", a starting current in excess of the average operating current is permissible as indicated under Maximum Ratings. When the tube is subjected to such high starting currents, the regulated voltage may require up to 20 minutes to drop to its normal operating value. This performance is characteristic of voltage-regulator tubes of the glow-discharge type. Similarly, the regulation is affected by changes in current within the operating current range.


In order to handle more load current, two or more tubes may be operated in parallel, but such parallel operation requires that a resistance of approximately 100 ohms be used in series with each tube in order to equalize division of the current between the paralleled tubes. The disadvantage of this method, of course, is that the use of resistors impairs the regulation which can be obtained.

**5B0**


If the associated circuit has a capacitor in shunt with the tube, the capacitor should be limited in value to 0.1  $\mu$ F. A larger value may cause the tube to oscillate and thus give unstable regulation performance.

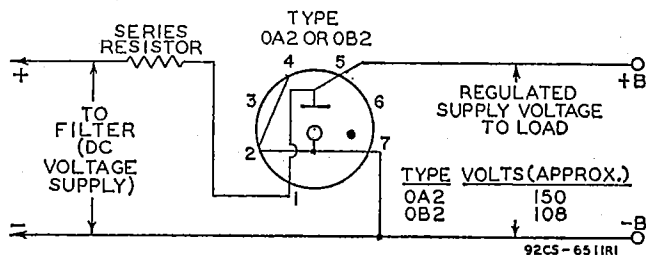

Typical circuit to provide regulated supply voltage of approximately 150 or 108 volts to load. Removal of tube from socket removes voltage from load.

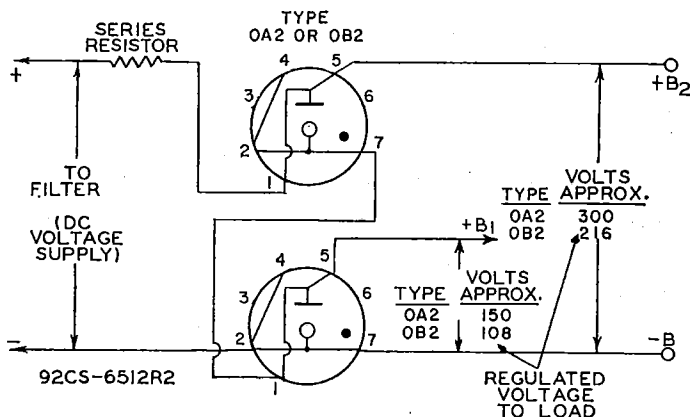

Typical circuit using two OA2's or two OB2's to provide regulated supply voltages of approximately 300 or 216 volts and 150 or 108 volts to load. Socket connections are so made that voltage on load is removed when either tube is taken from its socket.

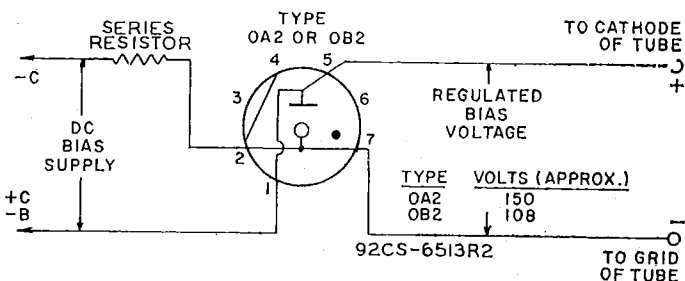

Typical circuit for bias-supply regulation. Removal of tube from socket opens B-supply circuit of regulated tubes.


**OA2WA**  
**OA3**  
**OA3A**  
**OA4G**

Refer to chart at end of section.  
Refer to chart at end of section.  
Refer to chart at end of section.  
Refer to chart at end of section.

**OB2**  
INDUSTRIAL  
TYPE

### VOLTAGE REGULATOR

Miniature type cold-cathode, glow-discharge tube used in voltage regulator applications. Outlines section, 5D; requires miniature 7-contact socket.



**5B0**

#### MAXIMUM RATINGS (Absolute-Maximum Values)

|                            |            |    |
|----------------------------|------------|----|
| Average Starting Current ♦ | 75         | mA |
| DC Cathode Current         | { 30       | mA |
| Frequency                  | { 5 min.   | mA |
| Ambient-Temperature Range  | 0          | Hz |
|                            | -55 to +90 | °C |

#### MAXIMUM CIRCUIT VALUES

|                 |                              |    |
|-----------------|------------------------------|----|
| Shunt Capacitor | 0.1                          | μF |
| Series Resistor | See Operating Considerations |    |

#### CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

|                         | Min.             | Av. | Max. |       |
|-------------------------|------------------|-----|------|-------|
| DC Anode-Supply Voltage | 133 <sup>■</sup> | —   | —    | volts |
| Anode Breakdown Voltage | —                | 115 | 133* | volts |
| Anode Voltage Drop      | 101 <sup>●</sup> | 108 | 114* | volts |
| Regulation (5 to 30 mA) | —                | 1   | 4*   | volts |

♦ Averaged over starting period not exceeding 10 seconds. This starting period must be followed by a steady-state operating condition of at least 20 minutes, or tube performance will be impaired.

■ Not less than indicated supply voltage should be provided to insure "starting" throughout tube life.

\* Maximum individual tube value during useful life.

● Minimum individual tube value during useful life.

#### Operating Considerations

Refer to type OA2.

**OB2WA**

Refer to chart at end of section.


**OC2**

Refer to chart at end of section.

**OC3**  
INDUSTRIAL  
TYPE

### VOLTAGE REGULATOR

Glass octal type cold-cathode, glow-discharge tube used in voltage regulator applications. Outlines section, 22; requires octal socket.



**4AJ**

#### MAXIMUM RATINGS (Absolute-Maximum Values)

|                            |            |    |
|----------------------------|------------|----|
| Average Starting Current ♦ | 100        | mA |
| DC Cathode Current         | { 40       | mA |
| Frequency                  | { 5 min.   | mA |
| Ambient-Temperature Range  | 0          | Hz |
|                            | -55 to +90 | °C |



**MAXIMUM CIRCUIT VALUES**

|                       |                              |         |
|-----------------------|------------------------------|---------|
| Shunt Capacitor ..... | 0.1                          | $\mu$ F |
| Series Resistor ..... | See Operating Considerations |         |

**CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN**

|                               | Min.             | Av. | Max. |       |
|-------------------------------|------------------|-----|------|-------|
| DC Anode-Supply Voltage ..... | 133 <sup>■</sup> | —   | —    | volts |
| Anode Breakdown Voltage ..... | —                | 115 | 133* | volts |
| Anode Voltage Drop .....      | 103 <sup>●</sup> | 108 | 116* | volts |
| Regulation (5 to 40 mA) ..... | —                | 2   | 4*   | volts |

♦ Averaged over starting period not exceeding 10 seconds. This starting period must be followed by a steady-state operating condition of at least 20 minutes, or tube performance will be impaired.

■ Not less than indicated supply voltage should be provided to insure "starting" throughout tube life.

\* Maximum individual tube value during useful life.


● Minimum individual tube value during useful life.

**Operating Considerations**

Refer to type OA2. For circuit diagrams refer to next page.

Refer to chart at end of section.

**OC3A**



**4AJ**

**VOLTAGE REGULATOR**

**OD3**  
INDUSTRIAL  
TYPE

Glass octal type cold-cathode, glow-discharge tube used in voltage regulator applications. Outlines section, 22; requires octal socket.

**MAXIMUM RATINGS (Absolute-Maximum Values)**

|                                  |            |    |
|----------------------------------|------------|----|
| Average Starting Current ♦ ..... | 100        | mA |
| DC Cathode Current .....         | { 40       | mA |
| Frequency .....                  | { 5 min.   | mA |
| Ambient-Temperature Range .....  | 0          | Hz |
|                                  | -55 to +90 | °C |

**MAXIMUM CIRCUIT VALUES**

|                       |                              |         |
|-----------------------|------------------------------|---------|
| Shunt Capacitor ..... | 0.1                          | $\mu$ F |
| Series Resistor ..... | See Operating Considerations |         |

**CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN**

|                               | Min.             | Av. | Max. |       |
|-------------------------------|------------------|-----|------|-------|
| DC Anode-Supply Voltage ..... | 185 <sup>■</sup> | —   | —    | volts |
| Anode Breakdown Voltage ..... | —                | 160 | 185* | volts |
| Anode Voltage Drop .....      | 142 <sup>●</sup> | 153 | 165* | volts |
| Regulation (5 to 40 mA) ..... | —                | 4   | 5.5* | volts |

♦ Averaged over starting period not exceeding 10 seconds. This starting period must be followed by a steady-state operating condition of at least 20 minutes, or tube performance will be impaired.

■ Not less than indicated supply voltage should be provided to insure "starting" throughout tube life.

\* Maximum individual tube value during useful life.


● Minimum individual tube value during useful life.

**Operating Considerations**

Refer to type OA2. For circuit diagrams refer to next page.


Refer to chart at end of section.

**OD3A**

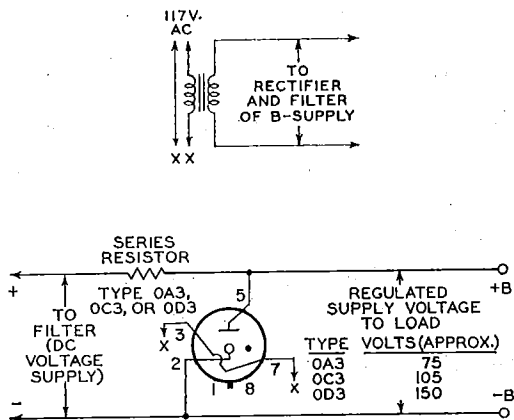

92CS-19183

Typical circuit to provide regulated supply voltage of approximately 75, 105, or 150 volts to load. Removal of tube from socket removes voltage from load.

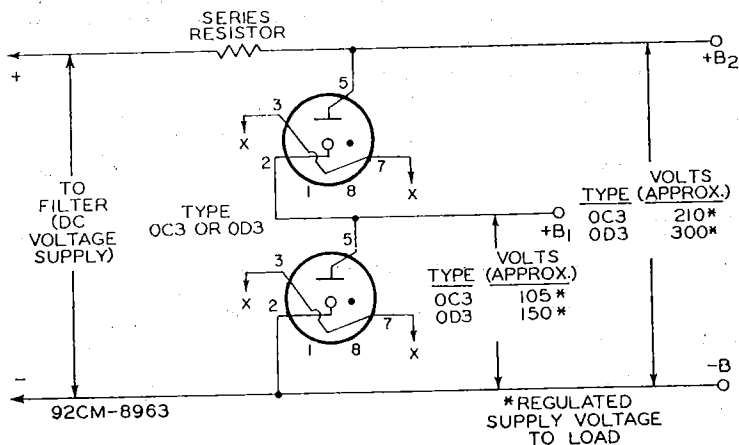

92CM-8963


Typical circuit using two OC3's, or two OD3's to provide regulated supply voltages of approximately 210 or 300 volts and 105 or 150 volts to load. Socket connections are so made that voltage on load is removed when either tube is taken from its socket.

Refer to chart at end of data section.

**OZ4**

Refer to type OZ4A/OZ4.

**OZ4A**



4R

## FULL-WAVE GAS RECTIFIER OZ4A/OZ4

Metal type used as a power rectifier in equipment with vibrator-type power supplies. Outlines section, 2A; requires octal socket. This tube, like other power-handling tubes, should be adequately ventilated.

### Full-Wave Rectifier

#### MAXIMUM AND MINIMUM RATINGS (Design-Center Values)

|  |                      |       |
|--|----------------------|-------|
| Peak Inverse Plate Voltage (Per Plate) .....   | 880 max              | volts |
| Peak Starting-Supply Voltage (Per Plate) ..... | 300 <sup>A</sup> min | volts |
| Peak Plate Current (Per Plate) .....           | 330 max              | mA    |
| DC Output Current .....                        | 110 max              | mA    |
|  | 30 <sup>A</sup> min  | mA    |

#### TYPICAL OPERATION WITH VIBRATOR-TYPE POWER SUPPLY AND CAPACITOR INPUT TO FILTER

|  |     |       |
|--|-----|-------|
| Peak Plate Supply Voltage (Per Plate) ‡ .....            | 440 | volts |
| Filter-Input Capacitor .....                             | 8   | μF    |
| Total Effective Plate Supply Impedance (Per Plate) ..... | 600 | ohms  |
| DC Output at Input to Filter .....                       | 310 | volts |
| DC Output Current .....                                  | 100 | mA    |

#### CHARACTERISTICS

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for current of 110 mA (Per Plate) ..... | 24 | volts |
|---|----|-------|

#### MINIMUM CIRCUIT VALUE

|  |     |      |
|--|-----|------|
| Total Effective Plate-Supply Impedance (Per Plate) ..... | 300 | ohms |
|--|-----|------|

<sup>A</sup> Absolute value. Under no circumstances should the tube be operated below the value shown.

‡ Open-circuit voltage (flat portion of transformer voltage wave).

Refer to chart at end of section.

**OZ4G**

Refer to chart at end of section.

**1A3**

Refer to chart at end of section.

**1A4P**

Refer to chart at end of section.

**1A5GT**

Refer to chart at end of section.

**1A6**

Refer to chart at end of section.


**1A7GT**

Refer to chart at end of section.

**1AC5**

Refer to chart at end of section.

**1AD2**



12GV

## HALF-WAVE VACUUM RECTIFIER

## 1AD2A

Duodecarr type used as a rectifier in high-voltage pulse circuits of color and black-and-white television receivers. Outlines section, 9A; requires duodecarr 12-contact socket. Socket terminals 4 and 10 may be used as tie points for components at or near filament potential. For high-voltage and X-ray safety considerations, refer to page 93.

|  |      |        |
|--|------|--------|
| Filament Voltage (ac/dc)                     | 1.25 | volts  |
| Filament Current                             | 0.2  | ampere |
| Direct Interelectrode Capacitance (Approx.): |      |        |
| Plate to Filament                            | 1.6  | pF     |

### Pulsed Rectifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 26000* | volts |
| Peak Plate Current          | 50     | mA    |
| Average Plate Current       | 0.5    | mA    |
| Filament Voltage:           |        |       |
| Absolute-maximum value      | 1.45   | volts |
| Absolute-minimum value      | 1.05   | volts |

#### CHARACTERISTIC, Instantaneous Value

|   |     |       |
|---|-----|-------|
| Tube Voltage Drop for plate current of 7 mA | 225 | volts |
|---|-----|-------|

#### X-RADIATION CHARACTERISTIC

|  |     |       |
|--|-----|-------|
| X-Radiation, Maximum:                                |     |       |
| Statistical value controlled on a lot sampling basis | 0.5 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).  
\* The dc component must not exceed 22000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

**1AD5**

Refer to chart at end of section.

**1AX2**

Refer to chart at end of section.

**1AY2**


Refer to chart at end of section.

**1AY2A**

### HALF-WAVE VACUUM RECTIFIER

Miniature type used to supply high voltage to the anode of the picture tube in television receivers. Outlines section, 33A; requires 2-contact socket. For high-voltage and X-ray safety considerations, refer to page 93.

|                                     |      |        |
|-------------------------------------|------|--------|
| Filament Voltage (ac/dc)            | 1.25 | volts  |
| Filament Current                    | 0.2  | ampere |
| Direct Interelectrode Capacitances: |      |        |
| Plate to Filament                   | 1.4  | pF     |



### Flyback Rectifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 26000* | volts |
| Peak Plate Current          | 50     | mA    |
| Average Plate Current       | 0.5    | mA    |
| Filament Voltage:           |        |       |
| Absolute-maximum value      | 1.45   | volts |
| Absolute-minimum value      | 1.05   | volts |

#### CHARACTERISTIC, Instantaneous Value

|   |     |       |
|---|-----|-------|
| Tube Voltage Drop for plate current of 7 mA | 100 | volts |
|---|-----|-------|

#### X-RADIATION CHARACTERISTIC

|  |     |       |
|--|-----|-------|
| X-Radiation Maximum:                                 |     |       |
| Statistical value controlled on a lot sampling basis | 0.5 | mR/hr |


# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).  
\* The dc component must not exceed 22000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

**1B3GT**

Refer to chart at end of section.  
For replacement use type 1G3GTA/1B3GT.

- Refer to chart at end of section. **1B4P**
- Refer to chart at end of section. **1B5/25S**
- Refer to chart at end of section. **1B7GT**
- Refer to chart at end of section. **1BC2**



**HALF-WAVE  
VACUUM RECTIFIER**

**1BC2A**

Miniature type used as a high-voltage rectifier to supply power to the anode of the television picture tube. Outlines section, 7E. For high-voltage and X-ray safety considerations, refer to page 93. Heater: volts (ac/dc), 1.25; amperes, 0.2.

**Flyback Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 18000▲ | volts |
| Peak Plate Current          | 45     | mA    |
| Average Plate Current       | 0.5    | mA    |
| Filament Voltage:           |        |       |
| Absolute-maximum value      | 1.45   | volts |
| Absolute-minimum value      | 1.05   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA | 80 | volts |
|---|----|-------|

**X-RADIATION CHARACTERISTIC**

**X-Radiation, Maximum:**


|  |     |       |
|--|-----|-------|
| Statistical value controlled on a lot sampling basis                                   | 0.5 | mR/hr |
| # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds). |     |       |
| ▲ The dc component must not exceed 15000 volts.  |     |       |

**Caution**—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

- Refer to chart at end of section. **1BH2**
- Refer to chart at end of section. **1BH2A**
- Refer to chart at end of section. **1C5GT**
- Refer to chart at end of section. **1C6**
- Refer to chart at end of section. **1C7G**
- Refer to chart at end of section. **1C21**
- Refer to chart at end of section. **1D5GP**
- Refer to chart at end of section. **1D5GT**
- Refer to chart at end of section. **1D7G**
- Refer to chart at end of section. **1D8GT**
- Refer to chart at end of section. **1DG3**

**1DG3A****HALF-WAVE  
VACUUM RECTIFIER**

Glass octal type used as a high-voltage rectifier to supply power to the television picture tube. Outlines section, 14J; requires octal socket. Socket terminals 1 and 7 may be used as tie points for components at or near filament potential. For high-voltage and X-ray safety considerations, refer to page 93. Filament: volts (ac/dc), 1.25; ampere, 0.2.

**Flyback Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 26000● | volts |
| Peak Plate Current          | 50     | mA    |
| Average Plate Current       | 0.5    | mA    |
| Filament Voltage:           |        |       |
| Absolute-maximum value      | 1.45   | volts |
| Absolute-minimum value      | 1.05   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |     |       |
|---|-----|-------|
| Tube Voltage Drop for plate current of 7 mA | 225 | volts |
|---|-----|-------|

**X-RADIATION CHARACTERISTIC**

|  |     |       |
|--|-----|-------|
| X-Radiation, Maximum:                                |     |       |
| Statistical value controlled on a lot sampling basis | 0.5 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle.

● The dc component must not exceed 22000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

**1DN5**

Refer to chart at end of section.

**1E5GP**

Refer to chart at end of section.

**1E7GT**

Refer to chart at end of section.

**1E8**

Refer to chart at end of section.

**1F4**

Refer to chart at end of section.

**1F5G**

Refer to chart at end of section.

**1F6**

Refer to chart at end of section.

**1F7G**


Refer to chart at end of section.

**1G3GT/  
1B3GT**

Refer to chart at end of section.

**1G3GTA  
1G3GTA/  
1B3GT****HALF-WAVE  
VACUUM RECTIFIER**

Glass octal type used as a high-voltage rectifier to supply power to the anode of the television picture tube. Outlines section, 14B; requires octal socket. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential. For high-voltage and X-ray safety considerations, refer to page 93. Filament: volts (ac/dc), 1.25; ampere, 0.2.

**3C**

**Flyback Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 26000* | volts |
| Peak Plate Current          | 50     | mA    |
| Average Plate Current       | 0.5    | mA    |
| Filament Voltage:           |        |       |
| Absolute-maximum value      | 1.45   | volts |
| Absolute-minimum value      | 1.05   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |     |       |
|---|-----|-------|
| Tube Voltage Drop for plate current of 7 mA | 100 | volts |
|---|-----|-------|

**X-RADIATION CHARACTERISTIC**


|  |     |       |
|--|-----|-------|
| X-Radiation, Maximum:                                |     |       |
| Statistical value controlled on a lot sampling basis | 0.5 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* The dc component must not exceed 21000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

- Refer to chart at end of section. **1G4GT**
- Refer to chart at end of section. **1G5G**
- Refer to chart at end of section. **1G6GT**
- Refer to chart at end of section. **1H4G**
- Refer to chart at end of section. **1H5GT**
- Refer to chart at end of section. **1H6G**
- Refer to chart at end of section. **1J3**
- Refer to chart at end of section. **1J5G**
- Refer to chart at end of section. **1J6G**
- Refer to chart at end of section. **1J6GT**
- Refer to chart at end of section. **1K3**
- Refer to chart at end of section. **1K3/1J3**



**3C**

**HALF-WAVE VACUUM RECTIFIER**

**1K3A/1J3**

Glass octal type used as a high-voltage rectifier to supply power to the anode of the television picture tube. Outlines section, 14B; requires octal socket. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential. For high-voltage and X-ray safety considerations, refer to page 93.

Filament: volts (ac/dc), 1.25; ampere, 0.2.

**Flyback Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 26000* | volts |
| Peak Plate Current          | 50     | mA    |
| Average Plate Current       | 0.5    | mA    |
| Filament Voltage:           |        |       |
| Absolute-maximum value      | 1.45   | volts |
| Absolute-minimum value      | 1.05   | volts |

**CHARACTERISTIC, Instantaneous Value**

Tube Voltage Drop for plate current of 7 mA ..... 225 volts

**X-RADIATION CHARACTERISTIC****X-Radiation, Maximum:**

Statistical value controlled on a lot sampling basis ..... 0.5 mR/hr

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* The dc component must not exceed 22000 volts.

**Caution**—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

|                  |                                   |
|------------------|-----------------------------------|
| <b>1L4</b>       | Refer to chart at end of section. |
| <b>1L6</b>       | Refer to chart at end of section. |
| <b>1LA4</b>      | Refer to chart at end of section. |
| <b>1LA6</b>      | Refer to chart at end of section. |
| <b>1LB4</b>      | Refer to chart at end of section. |
| <b>1LC5</b>      | Refer to chart at end of section. |
| <b>1LC6</b>      | Refer to chart at end of section. |
| <b>1LD5</b>      | Refer to chart at end of section. |
| <b>1LE3</b>      | Refer to chart at end of section. |
| <b>1LG5</b>      | Refer to chart at end of section. |
| <b>1LH4</b>      | Refer to chart at end of section. |
| <b>1LN5</b>      | Refer to chart at end of section. |
| <b>1N2A</b>      | Refer to chart at end of section. |
| <b>1N5GT</b>     | Refer to chart at end of section. |
| <b>1N6G</b>      | Refer to chart at end of section. |
| <b>1P5GT</b>     | Refer to chart at end of section. |
| <b>1Q5GT</b>     | Refer to chart at end of section. |
| <b>1R5</b>       | Refer to chart at end of section. |
| <b>1S2A/DY87</b> | Refer to chart at end of section. |
| <b>1S4</b>       | Refer to chart at end of section. |
| <b>1S5</b>       | Refer to chart at end of section. |
| <b>1T4</b>       | Refer to chart at end of section. |
| <b>1T5GT</b>     | Refer to chart at end of section. |
| <b>1T6</b>       | Refer to chart at end of section. |
| <b>1U4</b>       | Refer to chart at end of section. |



Refer to chart at end of section.


1U5

Refer to chart at end of section.

IV

### HALF-WAVE VACUUM RECTIFIER

1V2



9U

Miniature type used as a doubler in high-voltage pulse rectifier circuits of black-and-white television receivers and as a focus rectifier in color television receivers. The very low power required by the filament permits the use of a rectifier transformer having small size and light weight. Outlines section, 6B; requires miniature 9-contact socket.

|   |        |        |
|---|--------|--------|
| Filament Voltage (ac) .....   | 0.625* | volt   |
| Filament Current .....  | 0.3    | ampere |
| Direct Interelectrode Capacitance:<br>Plate to Filament (Approx.) ..... | 0.8    | pF     |

\* Under no circumstances should the filament voltage be less than 0.525 volt or greater than 0.725 volt.

### Pulsed Rectifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                   |       |       |
|-----------------------------------|-------|-------|
| Peak Inverse Plate Voltage# ..... | 8250* | volts |
| Peak Plate Current .....          | 11    | mA    |
| Average Plate Current .....       | 0.6   | mA    |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).


\* The dc component must not exceed 7000 volts.

Refer to chart at end of section.

1X2A

Refer to chart at end of section.

1X2B  
1X2B/1X2A



9Y

### HALF-WAVE VACUUM RECTIFIER

1X2C

Miniature type used as a rectifier in high-voltage pulse circuits of black-and-white television receivers and as a focus rectifier in color television receivers. Outlines section, 7A; requires miniature 9-contact socket. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. For high-voltage and X-ray safety considerations, refer to page 93.

|   |      |        |
|---|------|--------|
| Filament Voltage (ac) .....   | 1.25 | volts  |
| Filament Current .....  | 0.2  | ampere |
| Direct Interelectrode Capacitance:<br>Plate to Filament and Internal Shield (Approx.) ..... | 1    | pF     |

### Flyback Rectifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                   |        |       |
|-----------------------------------|--------|-------|
| Peak Inverse Plate Voltage# ..... | 22000* | volts |
| Peak Plate Current .....          | 45     | mA    |
| Average Plate Current .....       | 0.5    | mA    |
| Filament Voltage:                 |        |       |
| Absolute-maximum value .....      | 1.45   | volts |
| Absolute-minimum value .....      | 1.05   | volts |

#### CHARACTERISTIC, Instantaneous Value

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA ..... | 80 | volts |
|---|----|-------|

**X-RADIATION CHARACTERISTIC**

X-Radiation, Maximum:

Statistical value controlled on a lot sampling basis ..... 0.5 mR/hr

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).


\* The dc component must not exceed 18000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

|                   |  |
|-------------------|--|
| <b>2A3</b>        | Refer to chart at end of section.  |
| <b>2A5</b>        | Refer to chart at end of section.  |
| <b>2A6</b>        | Refer to chart at end of section.  |
| <b>2A7</b>        | Refer to chart at end of section.  |
| <b>2AF4A</b>      | Refer to chart at end of section.  |
| <b>2AF4B</b>      | Refer to chart at end of section.  |
| <b>2AF4B/2DZ4</b> | Refer to type 6AF4A.   |
| <b>2AH2</b>       | Refer to chart at end of section.<br>For replacement use type 2BU2/2AH2. |
| <b>2AS2</b>       | Refer to chart at end of section.  |

**2AS2A****HALF-WAVE  
VACUUM RECTIFIER**

Duodecar type used as a rectifier in high-voltage pulse circuits of color television receivers. Outlines section, 9B; requires duodecar 12-contact socket. Socket terminals 4, 7, and 10 may be used as tie points for components at or near heater potential. For high-voltage and X-ray safety considerations, refer to page 93. Heater: volts (ac/dc), 2.5; amperes, 0.33.

**Pulsed Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |        |       |
|-----------------------------------|--------|-------|
| Peak Inverse Plate Voltage# ..... | 30000* | volts |
| Peak Plate Current .....          | 90     | mA    |
| Average Plate Current .....       | 1.7    | mA    |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA ..... | 75 | volts |
|---|----|-------|

**X-RADIATION CHARACTERISTIC**


X-Radiation, Maximum:

Statistical value controlled on a lot sampling basis ..... 25 mR/hr

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* The dc component must not exceed 24000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.



**HALF-WAVE  
VACUUM RECTIFIER**

**2AV2**

Miniature type used as a high-voltage, low-current pulse-operated focus rectifier in color television receivers. The filament of the tube can be operated directly across the filament winding of the horizontal-output transformer without a series voltage-dropping resistor. Outlines section, 6B; requires miniature 9-contact socket.

|  |       |        |
|--|-------|--------|
| Filament Voltage (ac) .....                  | 1.8   | volts  |
| Filament Current .....                       | 0.225 | ampere |
| Direct Interelectrode Capacitance (Approx.): |       |        |
| Plate to Filament .....                      | 0.8   | pF     |

**Pulsed Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |        |       |
|-----------------------------------|--------|-------|
| Peak Inverse Plate Voltage# ..... | 8250** | volts |
| Peak Plate Current .....          | 50     | mA    |
| Average Plate Current .....       | 0.6    | mA    |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 1 mA ..... | 20 | volts |
|---|----|-------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\*\* Under no circumstances should this absolute value be exceeded; the dc component must not exceed 7000 volts.

Refer to chart at end of section. **2B7**

Refer to chart at end of section. **2BA2**

Refer to chart at end of section. **2BJ2**  
**2BJ2A**


Refer to chart at end of section. **2BN4**

Refer to type 6BN4A. **2BN4A**

Refer to type 2BU2/2AH2 **2BU2**

**2BU2/  
2AH2**

**HALF-WAVE  
VACUUM RECTIFIER**



**12JB**

Duodecar type used as a high-voltage rectifier to supply power to the anode of the picture tube in television receivers. Outlines section, 9B; requires 12-contact socket. Socket terminals 4, 10, and 11 may be used as tie points for components at or near heater potential. For high-voltage and X-ray safety considerations, refer to page 93. Heater: volts (ac/dc), 2.5; ampere, 0.33.

## Flyback Rectifier

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Maximum Values)

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 30000* | volts |
| Peak Plate Current          | 80     | mA    |
| Average Plate Current       | 1.5    | mA    |
| Heater Voltage:             |        |       |
| Absolute-maximum value      | 2.9    | volts |
| Absolute-minimum value      | 2.1    | volts |

## CHARACTERISTIC, Instantaneous Value

|  |    |       |
|--|----|-------|
| Tube Voltage Drop (Approx.), for plate current of 7 mA | 60 | volts |
|--|----|-------|

## X-RADIATION CHARACTERISTIC

|  |     |       |
|--|-----|-------|
| X-Radiation, Maximum:                                |     |       |
| Statistical value controlled on a lot sampling basis | 0.5 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* The dc component must not exceed 24000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

2CN3A

Refer to chart at end of section.

2CW4

Refer to type 6CW4.

2CY5


Refer to type 6CY5.

2D21

INDUSTRIAL  
TYPE

## GAS THYRATRON

Miniature type gas-tetrode thyatron intended for relay applications. Outlines section, 5C; requires miniature 7-contact socket.



7B N

|  |                |         |
|--|----------------|---------|
| Heater Voltage (ac/dc)   | $6.3 \pm 10\%$ | volts   |
| Heater Current   | 0.6            | ampere  |
| Cathode:   |                |         |
| Heating time prior to tube conduction  | 10             | seconds |
| Heater-Cathode Voltage:  |                |         |
| Peak value   | -100 +25       | volts   |
| Direct Interelectrode Capacitances (Approx.):  |                |         |
| Grid No. 1 to anode  | 0.026          | pF      |
| Input  | 2.4            | pF      |
| Output   | 1.6            | pF      |
| Ionization Time (Approx.):   |                |         |
| For conditions: dc anode volts = 100; grid-No. 1 square-pulse volts = 50; peak anode amp. during conduction = 0.5                  | 0.5            | $\mu$ s |
| Deionization Time (Approx.):   |                |         |
| For conditions: dc anode volts = 125; grid-No. 1 volts = -100, grid-No. 1 resistor (ohms) = 1000; ac anode amp. = 0.1              | 35             | $\mu$ s |
| For conditions: dc anode volts = 125; grid-No. 1 volts = -10; grid-No. 1 resistor (ohms) = 1000, dc anode amp. = 0.1               | 75             | $\mu$ s |
| Maximum Critical Grid-No. 1 Current with an anode-supply volts (rms) = 460, and average anode amp. = 0.1                           | 0.5            | $\mu$ A |
| Anode Voltage Drop (Approx.)   | 8              | volts   |
| Grid-No. 1 Control Ratio (Approx.) with grid-No. 1 resistor (megohms) = 0; grid-No. 2 volts = 0                                    | 250            |         |
| Grid-No. 2 Control Ratio (Approx.) with grid-No. 1 resistor (megohms) = 0; grid-No. 2 resistor (megohms) = 0; grid-No. 1 volts = 0 | 1000           |         |


## Relay and Grid-Controlled Rectifier Service

## MAXIMUM RATINGS (Absolute-Maximum Values)

|                                   |      |       |
|-----------------------------------|------|-------|
| Peak Anode Voltage:               |      |       |
| Forward                           | 650  | volts |
| Inverse                           | 1300 | volts |
| Grid-No. 2 (Shield-Grid) Voltage: |      |       |
| Peak, before anode conduction     | -100 | volts |
| Average, during anode conduction  | -10  | volts |

|                                      |            |         |
|--------------------------------------|------------|---------|
| Grid-No. 1 (Control-Grid) Voltage:   |            |         |
| Peak, before anode conduction        | -100       | volts   |
| Average, during anode conduction     | -10        | volts   |
| Cathode Current:                     |            |         |
| Peak                                 | 0.5        | ampere  |
| Average                              | 0.1        | ampere  |
| Fault, for duration of 0.1 sec. max. | 10         | amperes |
| Grid-No. 2 Current:                  |            |         |
| Average                              | +0.01      | ampere  |
| Grid-No. 1 Current:                  |            |         |
| Average                              | +0.01      | ampere  |
| Ambient Temperature Range            | -75 to +90 | °C      |

*Operational Range of Critical Grid-No. 1 Voltage.*

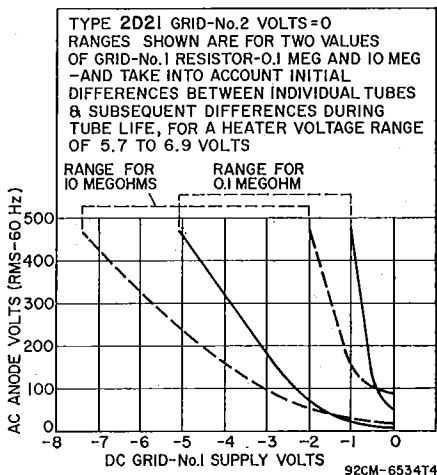

**TYPICAL OPERATING CONDITIONS FOR RELAY SERVICE**

|   |      |      |        |
|---|------|------|--------|
| RMS Anode Voltage                       | 117  | 400  | volts  |
| Grid-No.2 Voltage                       | 0    | 0    | volts  |
| RMS Grid-No.1 Bias Voltage <sup>□</sup> | 5    | —    | volts  |
| DC Grid-No.1 Bias Voltage               | —    | -6   | volts  |
| Peak Grid-No.1 Signal Voltage           | 5    | 6    | volts  |
| Grid-No.1-Circuit Resistance            | 1.0  | 1.0  | megohm |
| Anode-Circuit Resistance <sup>#</sup>   | 1200 | 2000 | ohms   |

**MAXIMUM CIRCUIT VALUE**

|                              |    |         |
|------------------------------|----|---------|
| Grid-No.1-Circuit Resistance | 10 | megohms |
|------------------------------|----|---------|

■ Averaged over any interval of 30 seconds maximum.

□ Approximately 180° out of phase with the anode voltage.

# Sufficient resistance, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings.

Refer to chart at end of section.

**2D21W**

Refer to type 6DS4.

**2DS4**

Refer to type 6DV4.

**2DV4**

Refer to chart at end of section.  
For replacement use type 2AF4B/2DZ4.

**2DZ4**


Refer to chart at end of section.

**2E5**

# 2EG4


## HIGH-MU TRIODE

Nuvistor type used as a grounded-cathode, neutralized rf amplifier in vhf tuners of television and FM receivers. Outlines section, 1; requires nuvistor socket.



|      |         |
|------|---------|
| 1.7  | volts   |
| 0.6  | ampere  |
| 8    | seconds |
| ±100 | volts   |

|                               |       |
|-------------------------------|-------|
| Heater Voltage (ac/dc)        | ..... |
| Heater Current                | ..... |
| Heater Warm-up Time (Average) | ..... |
| Peak Heater-Cathode Voltage   | ..... |

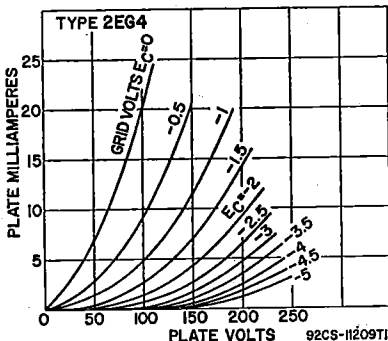

|   |      |    |
|---|------|----|
| Direct Interelectrode Capacitances (Approx.): |      |    |
| Grid to Plate                                 | 0.92 | pF |
| Grid to Cathode, Heater, and Shell            | 4.3  | pF |
| Plate to Cathode, Heater, and Shell           | 1.8  | pF |
| Plate to Cathode                              | 0.18 | pF |
| Heater to Cathode                             | 1.6  | pF |

### Class A<sub>1</sub> Amplifier

|  |      |       |
|--|------|-------|
| <b>MAXIMUM RATINGS</b> (Design-Maximum Values) |      |       |
| Plate Supply Voltage                           | 300° | volts |
| Plate Voltage                                  | 135  | volts |
| Grid Voltage:                                  |      |       |
| Negative-bias value                            | 55   | volts |
| Peak or dc positive value                      | 0    | volts |
| Plate Dissipation                              | 1.5  | watts |
| Cathode Current                                | 15   | mA    |


|  |                        |                          |       |
|--|------------------------|--------------------------|-------|
| <b>CHARACTERISTICS AND TYPICAL OPERATION</b>       | <b>Characteristics</b> | <b>Typical Operation</b> |       |
| Plate Supply Voltage                               | 110                    | 70                       | volts |
| Grid Supply Voltage                                | —                      | 0                        | volts |
| Cathode-Bias Resistor                              | 130                    | —                        | ohms  |
| Grid Resistor                                      | —                      | 47000                    | ohms  |
| Amplification Factor                               | 63                     | 68                       | —     |
| Plate Resistance (Approx.)                         | 7000                   | 5440                     | ohms  |
| Transconductance                                   | 9000                   | 12500                    | μmhos |
| Grid Voltage (Approx.) for plate current of 100 μA | —5                     | —                        | volts |
| Grid Voltage (Approx.) for plate current of 10 μA  | —6.8                   | —                        | volts |
| Plate Current                                      | 6.5                    | 7                        | mA    |

|                               |     |         |
|-------------------------------|-----|---------|
| <b>MAXIMUM CIRCUIT VALUES</b> |     |         |
| Grid-Circuit Resistance:*     |     |         |
| For fixed-bias operation      | 2.2 | megohms |
| For cathode-bias operation    | 0.5 | megohm  |

\* A plate supply voltage of 300 volts may be used provided that a sufficiently large resistor is used in the plate circuit to limit the plate dissipation to 1.5 watts under any condition of operation.

■ For operation at metal-shell temperatures up to 135° C.

|   |                   |
|---|-------------------|
| Refer to chart at end of section.   | <b>2EN5</b>       |
| Refer to chart at end of section.   | <b>2ER5</b>       |
| Refer to type 6FH5.   | <b>2FH5</b>       |
| Refer to chart at end of section.<br>For replacement use type 2GK5/2FQ5A. | <b>2FQ5A</b>      |
| Refer to type 6FS5.   | <b>2FS5</b>       |
| Refer to chart at end of section.   | <b>2GK5</b>       |
| Refer to type 6GK5.   | <b>2GK5/2FQ5A</b> |
| Refer to chart at end of section.<br>For replacement use type 2FS5.       | <b>2GU5</b>       |
| Refer to type 6HA5.   | <b>2HA5</b>       |
| Refer to type 6HQ5.   | <b>2HQ5</b>       |
| Refer to chart at end of section.   | <b>3A2</b>        |



**HALF-WAVE  
VACUUM RECTIFIER**

**3A2A**

Miniature type used in high-voltage rectifier circuits of small-screen black-and-white television receivers. Outlines section, 7A; requires miniature 9-contact socket. Socket terminals 1, 3, 4, 6, and 7 may be connected to terminal 9 or to a corona shield which connects to terminal 9. Terminals 3 and 7 may be used as tie points

at or near cathode potential. For high-voltage and X-ray safety considerations, refer to page 93.

|   |      |        |
|---|------|--------|
| Heater Voltage (ac/dc) .....                        | 3.15 | volts  |
| Heater Current .....                                | 0.22 | ampere |
| Direct Interelectrode Capacitances:                 |      |        |
| Plate to Cathode, Heater, and Internal Shield ..... | 1    | pF     |

**Pulsed Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Ratings)**

|                                   |        |       |
|-----------------------------------|--------|-------|
| Peak Inverse Plate Voltage# ..... | 20000* | volts |
| Peak Plate Current .....          | 80     | mA    |
| Average Plate Current .....       | 1.5    | mA    |
| Heater Voltage:                   |        |       |
| Absolute-maximum value .....      | 3.65   | volts |
| Absolute-minimum value .....      | 2.65   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA ..... | 70 | volts |
|---|----|-------|

**X-RADIATION CHARACTERISTIC**

**X-Radiation, Maximum:**

|  |     |       |
|--|-----|-------|
| Statistical value controlled on a lot sampling basis ..... | 0.5 | mR/hr |
|--|-----|-------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* The dc component must not exceed 18000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

**3A3**

Refer to chart at end of section.

**3A3/3B2**

Refer to chart at end of section.

**3A3A****3A3A/3B2**


Refer to chart at end of section.

**3A3B**

Refer to chart at end of section.

**3A3C****HALF-WAVE  
VACUUM RECTIFIER**

Glass octal type used as a rectifier in high-voltage pulse circuits of color television receivers. Outlines section, 14F; requires octal socket. Socket terminals 1, 3, 4, 5, 6, and 8 may be connected to terminal 7. Socket terminals 4 and 6 may be used as tie points at or near cathode potential. For high-voltage and X-ray safety considerations, refer to page 98.

**8EZ**

|   |      |        |
|---|------|--------|
| Heater Voltage (ac) .....                           | 3.15 | volts  |
| Heater Current .....                                | 0.22 | ampere |
| Direct Interelectrode Capacitances:                 |      |        |
| Plate to Heater, Cathode, and Internal Shield ..... | 1.5  | pF     |

**Pulsed Rectifier****MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |        |       |
|-----------------------------------|--------|-------|
| Peak Inverse Plate Voltage# ..... | 38000* | volts |
| Peak Plate Current .....          | 100    | mA    |
| Average Plate Current .....       | 2      | mA    |
| Heater Voltage:                   |        |       |
| Absolute-maximum value .....      | 3.65   | volts |
| Absolute-minimum value .....      | 2.65   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |     |       |
|---|-----|-------|
| Tube Voltage Drop (Approx.) for plate current of 7 mA ..... | 100 | volts |
|---|-----|-------|

**X-RADIATION CHARACTERISTIC**

|  |    |       |
|--|----|-------|
| X-Radiation, Maximum:                                      |    |       |
| Statistical value controlled on a lot sampling basis ..... | 25 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* DC component must not exceed 30000 volts.


Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

**3A4**

Refer to chart at end of section.

**3A5****INDUSTRIAL  
TYPE****H-F TWIN TRIODE**

Miniature type twin triode used as a A-F power amplifier or an R-F power amplifier or oscillator. Each triode can be used independently of the other. Outlines section, 5C; requires miniature 7-contact socket.

**7BC**

|                             |         |            |        |
|-----------------------------|---------|------------|--------|
| Filament Arrangement        | Series* | Parallel** |        |
| Filament Voltage (dc) ..... | 2.8     | 1.4        | volts  |
| Filament Current .....      | 0.11    | 0.22       | ampere |



|                                     |            |            |    |
|-------------------------------------|------------|------------|----|
| Direct Interelectrode Capacitances: | Unit No. 1 | Unit No. 2 |    |
| Grid to Plate .....                 | 3.2        | 3.2        | pF |
| Grid to Filament .....              | 0.9        | 0.9        | pF |
| Plate to Filament .....             | 1.0        | 1.0        | pF |
| Plate to Plate .....                |            | 0.32       | pF |

**A-F Power Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Center Values)**

|                         |     |       |
|-------------------------|-----|-------|
| Plate Voltage .....     | 135 | volts |
| Plate Current .....     | 5   | mA    |
| Plate Dissipation ..... | 0.5 | watt  |

**CHARACTERISTICS**

|                            |      |       |
|----------------------------|------|-------|
| Plate Voltage .....        | 90   | volts |
| Grid Voltage .....         | -2.5 | volts |
| Amplification Factor ..... | 15   |       |
| Plate Resistance .....     | 8300 | ohms  |
| Transconductance .....     | 1800 | μmhos |
| Plate Current .....        | 3.7  | mA    |

**R-F Power Amplifier and Oscillator—Class C Telegraphy**

Key-down conditions per tube without modulation

**MAXIMUM RATINGS (Design-Center Values)**

|                                    |     |       |
|------------------------------------|-----|-------|
| D-C Plate Voltage .....            | 135 | volts |
| D-C Grid Voltage .....             | -30 | volts |
| D-C Plate Current (per unit) ..... | 15  | mA    |
| D-C Grid Current (per unit) .....  | 2.5 | mA    |
| Plate Input (per unit) .....       | 2.0 | watts |
| Plate Dissipation (per unit) ..... | 1.0 | watt  |

**TYPICAL OPERATION (At 40 MHz With Both Units In Push-Pull)**

|                                     |      |       |
|-------------------------------------|------|-------|
| D-C Plate Voltage .....             | 135  | volts |
| D-C Grid Voltage* .....             | -20  | volts |
|                                     | 4000 | ohms  |
|                                     | 570  | ohms  |
| Peak R-F Grid-to-Grid Voltage ..... | 90   | volts |
| D-C Plate Current .....             | 30   | mA    |
| D-C Grid Current (approx.) .....    | 5    | mA    |
| Driving Power (approx.) .....       | 0.2  | watt  |
| Power Output (approx.) .....        | 2    | watts |

\* Filament voltage applied across two sections in series between pins No. 1 and No. 7. Grid voltage is referred to pin No. 1. For series filament operation, a shunting resistor must be connected across the section between pins No. 1 and No. 4, to by-pass excess cathode current in this section. The value of the shunting resistor should be adjusted to make the voltage across the shunted section equal to the voltage across the section between pins No. 4 and No. 7. When other tubes in series-filament arrangement contribute to the filament current of the 3A5, an additional shunting resistor may be required between pins No. 1 and No. 7.

\*\* Filament voltage applied across the two sections in parallel between pin No. 4 and pins No. 1 and No. 7 connected together. Grid voltage is referred to pins No. 1 and No. 7 tied together.

• Obtained by grid resistor (4000), cathode resistor (570), or fixed supply.

Refer to chart at end of section.

**3A8GT**

Refer to chart at end of section.

**3AF4A**

Refer to type 6AF4A.

**3AF4A/3DZ4**

Refer to type 6AL5.


**3AL5**

Refer to chart at end of section.

**3AT2**

**3AT2B****HALF-WAVE  
VACUUM RECTIFIER**

Duodecar type used as a high-voltage rectifier to supply power to the anode of the television picture tube. Outlines section, 9B; requires duodecar 12-contact socket. Socket terminals 4, 7, and 10 may be used as tie points for components at or near filament potential. For high-voltage and X-ray safety considerations, refer to page 93. Heater: volts (ac/dc), 3.15; ampere, 0.22.

**Flyback Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 38000* | volts |
| Peak Plate Current          | 88     | mA    |
| Average Plate Current       | 1.7    | mA    |
| Heater Voltage:             |        |       |
| Absolute-maximum value      | 3.65   | volts |
| Absolute-minimum value      | 2.65   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA | 60 | volts |
|---|----|-------|

**X-RADIATION CHARACTERISTIC**

|  |    |       |
|--|----|-------|
| X-Radiation, Maximum:                                |    |       |
| Statistical value controlled on a lot sampling basis | 25 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\*The dc component must not exceed 30000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

**3AU6**

Refer to type 6AU6A.

**3AV6**


Refer to chart at end of section.

**3AW2**

Refer to chart at end of section.

**3AW2A****HALF-WAVE  
VACUUM RECTIFIER**

Duodecar type used as a high-voltage rectifier to supply power to the anode of the picture tube in color and black-and-white television receivers. Outlines section, 9B; requires duodecar 12-contact socket. Socket terminals 4, 7, and 10 may be used as tie points at or near heater potential. For high-voltage and X-ray safety considerations, refer to page 93. Heater: volts (ac/dc), 3.15; ampere, 0.35.

**Pulsed Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 38000* | volts |
| Peak Plate Current          | 110    | mA    |
| Average Plate Current       | 2.2    | mA    |
| Heater Voltage:             |        |       |
| Absolute-maximum value      | 3.65   | volts |
| Absolute-minimum value      | 2.65   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA | 60 | volts |
|---|----|-------|

**X-RADIATION CHARACTERISTIC**

**X-Radiation, Maximum:**


Statistical value controlled on a lot sampling basis ..... 25 mR/hr  
 # Pulse duration must not exceed 16% of a horizontal scanning cycle (10 microseconds).  
 • The dc component must not exceed 30000 volts.

**Caution**—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

|   |                  |
|---|------------------|
| Refer to chart at end of section.         | <b>3AW3</b>      |
| Refer to chart at end of section.         | <b>3B2</b>       |
| Refer to chart at end of section.         | <b>3B4WA</b>     |
| Refer to chart at end of section.         | <b>3BA6</b>      |
| Refer to chart at end of section.         | <b>3BC5</b>      |
| Refer to type 6BC5.                       | <b>3BC5/3CE5</b> |
| Refer to chart at end of section.         | <b>3BE6</b>      |
| Refer to chart at end of section.         | <b>3BL2</b>      |
| Refer to chart at end of section.         | <b>3BL2A</b>     |
| Refer to chart at end of section.         | <b>3BM2</b>      |
| Refer to chart at end of section.         | <b>3BN2</b>      |
| Refer to chart at end of section.         | <b>3BN2A</b>     |
| Refer to chart at end of section.         | <b>3BN4</b>      |
| Refer to type 6BN4A.                      | <b>3BN4A</b>     |
| Refer to type 6BN6.                       | <b>3BN6</b>      |
| Refer to chart at end of section.         | <b>3BS2A</b>     |
| For replacement use type 3BW2/3BS2A/3BT2. | <b>3BT2</b>      |
| For replacement use type 3BW2/3BS2A/3BT2. | <b>3BU8</b>      |
| Refer to chart at end of section.         | <b>3BU8/3GS8</b> |
| Refer to type 6BU8.                       | <b>3BW2</b>      |
| For replacement use type 3BW2/3BS2A/3BT2. |                  |

**3BW2/  
3BS2A/  
3BT2**

**HALF-WAVE  
VACUUM RECTIFIER**



12HY

Duodecar type used as a high-voltage rectifier to supply power to the anode of the picture tube in color television receivers. Outlines section, 9B; requires octal socket. Socket terminals 4 and 10 may be used as tie points for components at or near heater potential. For high-voltage and X-ray safety considerations, refer to page 93.

|   |      |        |
|---|------|--------|
| Heater Voltage (ac/dc) .....                        | 3.15 | volts  |
| Heater Current .....                                | 0.48 | ampere |
| Direct Interelectrode Capacitance (Approx.):        |      |        |
| Plate to Cathode, Heater, and Internal Shield ..... | 1.6  | pF     |

### Flyback Rectifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                   |        |       |
|-----------------------------------|--------|-------|
| Peak Inverse Plate Voltage# ..... | 38000● | volts |
| Peak Plate Current .....          | 110    | mA    |
| Average Plate Current .....       | 2.2    | mA    |
| Heater Voltage:                   |        |       |
| Absolute-maximum value .....      | 3.65   | volts |
| Absolute-minimum value .....      | 2.65   | volts |

#### CHARACTERISTIC, Instantaneous Value

|  |    |       |
|--|----|-------|
| Tube Voltage Drop (Approx.), for plate current of 7 mA ..... | 70 | volts |
|--|----|-------|

#### X-RADIATION CHARACTERISTIC

|  |    |       |
|--|----|-------|
| X-Radiation, Maximum:                                      |    |       |
| Statistical value controlled on a lot sampling basis ..... | 25 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle.

● The dc component must not exceed 30000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

**3BY6**

Refer to chart at end of section.

**3BZ6**

Refer to type 6BZ6.


**3CA3**

Refer to chart at end of section.

## 3CA3A

### HALF-WAVE VACUUM RECTIFIER

Glass octal type used as a rectifier in high-voltage pulse circuits of color television receivers. Outlines section, 14E; requires octal socket. Socket terminals 1, 3, 4, 5, 6, and 8 may be connected to terminal 7 or to a corona shield which connects to terminal 7. Socket terminals 4 and 6 may be used as tie points at or near cathode potential. For high-voltage and X-ray safety considerations, refer to page 93.



**8MH**

|   |       |        |
|---|-------|--------|
| Heater Voltage (ac) .....                           | 3.6   | volts  |
| Heater Current .....                                | 0.225 | ampere |
| Direct Interelectrode Capacitance (Approx.):        |       |        |
| Plate to Heater, Cathode, and Internal Shield ..... | 1.6   | pF     |

### Pulsed Rectifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                   |        |       |
|-----------------------------------|--------|-------|
| Peak Inverse Plate Voltage# ..... | 38000● | volts |
| Peak Plate Current .....          | 100    | mA    |
| Average Plate Current .....       | 2      | mA    |
| Heater Voltage:                   |        |       |
| Absolute-maximum value .....      | 4.14   | volts |
| Absolute-minimum value .....      | 3.05   | volts |

#### CHARACTERISTIC, Instantaneous Value

|  |    |       |
|--|----|-------|
| Tube Voltage Drop for plate current of 11 mA ..... | 60 | volts |
|--|----|-------|

#### X-RADIATION CHARACTERISTIC

|  |    |       |
|--|----|-------|
| X-Radiation, Maximum:                                      |    |       |
| Statistical value controlled on a lot sampling basis ..... | 25 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

● The dc component must not exceed 30000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

Refer to type 6CB6A.

**3CB6**

Refer to type 6CB6A.

**3CB6/3CF6**

Refer to chart at end of section.

For replacement use type 3BC5/3CE5.

**3CE5**


Refer to chart at end of section.

For replacement use type 3CB6/3CF6.

**3CF6**

Refer to chart at end of section.

**3CN3A**



**8MU**

**HALF-WAVE  
VACUUM RECTIFIER**

**3CN3B**

Glass octal type used as a high-voltage rectifier to supply power to the anode of the picture tube in color and black-and-white television receivers. Outlines section, 14F; requires octal socket. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. For high-voltage and X-ray safety

considerations, refer to page 93.

|                              |      |        |
|------------------------------|------|--------|
| Heater Voltage (ac/dc) ..... | 3.15 | volts  |
| Heater Current .....         | 0.48 | ampere |

**Flyback Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |        |       |
|-----------------------------------|--------|-------|
| Peak Inverse Plate Voltage# ..... | 38000* | volts |
| Peak Plate Current .....          | 110    | mA    |
| Average Plate Current .....       | 2.2    | mA    |
| Heater Voltage:                   |        |       |
| Absolute-maximum value .....      | 3.65   | volts |
| Absolute-minimum value .....      | 2.65   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA ..... | 60 | volts |
|---|----|-------|

**X-RADIATION CHARACTERISTIC**

|  |    |       |
|--|----|-------|
| X-Radiation, Maximum:                                      |    |       |
| Statistical value controlled on a lot sampling basis ..... | 25 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* The dc component must not exceed 30000 volts.


Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

Refer to type 6CS6.

**3CS6**

**HALF-WAVE  
VACUUM RECTIFIER**

**3CU3A**



**8MK**

Glass octal type used as a rectifier in high-voltage circuits of color and black-and-white television receivers. Because of its fast warm-up time it is particularly suited for transistorized systems. Outlines section, 14F; requires octal socket. Socket terminals 4 and 6 may be used as tie points. For high-voltage and X-ray safety considerations, refer to page 93.

|                                    |      |        |
|------------------------------------|------|--------|
| Filament Voltage:                  |      |        |
| Filament Current (ac) .....        | 3.15 | volts  |
| Direct Interelectrode Capacitance: |      |        |
| Plate to Filament and Shield ..... | 0.28 | ampere |
|                                    | 1.5  | pF     |

## Pulsed Rectifier

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Maximum Values)

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 38000* | volts |
| Peak Plate Current          | 100    | mA    |
| Average Plate Current       | 2      | mA    |
| Filament Voltage:           |        |       |
| Absolute-maximum value      | 3.65   | volts |
| Absolute-minimum value      | 2.65   | volts |

## CHARACTERISTIC, Instantaneous Value

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA | 50 | volts |
|---|----|-------|

## X-RADIATION CHARACTERISTIC

|  |    |       |
|--|----|-------|
| X-Radiation, Maximum:                                |    |       |
| Statistical value controlled on a lot sampling basis | 25 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* The dc component must not exceed 30000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

3CX3

Refer to chart at end of section.

3CY3

Refer to chart at end of section.  
For replacement use type 3DB3/3CY3.

3CY5

Refer to type 6CY5.


3CZ3

Refer to chart at end of section.

## 3CZ3A

HALF-WAVE  
VACUUM RECTIFIER

Glass octal type for use in the high-voltage rectifier circuits of television receivers and in other high voltage applications. Outlines section, 34A; requires octal socket. Socket terminals 1, 3, 4, 5, 6, and 8 may be connected to socket terminal 7. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. For high-voltage and X-ray safety considerations, refer to page 93.



8EZ

|   |      |         |
|---|------|---------|
| Heater Voltage                                | 3.15 | volts   |
| Heater Current                                | 0.48 | ampere  |
| Heater Warm-up Time                           | 4    | seconds |
| Direct Interelectrode Capacitance:            |      |         |
| Plate to Heater, Cathode, and Internal Shield | 1.6  | pF      |

## Pulsed Rectifier

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Maximum Values)

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 38000* | volts |
| Peak Plate Current          | 110    | mA    |
| Average Plate Current       | 2.2    | mA    |
| Heater Voltage:             |        |       |
| Absolute-maximum value      | 3.65   | volts |
| Absolute-minimum value      | 2.65   | volts |

## CHARACTERISTIC, Instantaneous Value

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA | 60 | volts |
|---|----|-------|

## X-RADIATION CHARACTERISTIC

|  |    |       |
|--|----|-------|
| X-Radiation, Maximum:                                |    |       |
| Statistical value controlled on a lot sampling basis | 25 | mR/hr |


# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* The dc component must not exceed 30000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

Refer to type 3DB3/3CY3.

**3DB3**



**HALF-WAVE VACUUM RECTIFIER 3DB3/3CY3**

Octal type used as a high-voltage rectifier to supply power to the anode of the television picture tube. Outlines section, 14F; requires octal socket. Socket terminals 3, 4, 5, 6, and 8 should not be used as tie points although terminals 3, 5, and 8 may be connected to terminal 7. For high-voltage and X-ray safety considerations, refer to page 93.

|   |       |        |
|---|-------|--------|
| Heater Voltage .....                                | 3.15  | volts  |
| Heater Current .....                                | 0.245 | ampere |
| Direct Interelectrode Capacitance (Approx.):        |       |        |
| Plate to Heater, Cathode, and Internal Shield ..... | 1.5   | pF     |

**Flyback Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |        |       |
|-----------------------------------|--------|-------|
| Peak Inverse Plate Voltage# ..... | 38000* | volts |
| Peak Plate Current .....          | 100    | mA    |
| Average Plate Current .....       | 2      | mA    |
| Heater Voltage:                   |        |       |
| Absolute-maximum value .....      | 3.65   | volts |
| Absolute minimum value .....      | 2.65   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |     |       |
|---|-----|-------|
| Tube Voltage Drop for plate current of 7 mA ..... | 100 | volts |
|---|-----|-------|


**X-RADIATION CHARACTERISTIC**

|  |    |       |
|--|----|-------|
| X-Radiation, Maximum:                                      |    |       |
| Statistical value controlled on a lot sampling basis ..... | 25 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* The dc component must not exceed 30000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.



**HALF-WAVE VACUUM RECTIFIER 3DC3**

Glass octal type used as a rectifier in high-voltage circuits of color and black-and-white television receivers. Because of its fast warm-up time it is particularly suited for transistorized systems. Outlines section, 14F; requires octal socket. Socket terminals 4, 6, and 8 may be used as tie points. For high-voltage and X-ray safety considerations, refer to page 93. This type is identical with type 3CU3A except for the following items:

**Pulsed Rectifier**


For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |     |    |
|-----------------------------|-----|----|
| Peak Plate Current .....    | 110 | mA |
| Average Plate Current ..... | 2.2 | mA |

**3DF3****HALF-WAVE  
VACUUM RECTIFIER**

Glass octal type used as a high-voltage rectifier to supply power to the anode of the picture tube in television receivers. Outline section, 14G; requires octal socket. Socket terminals 1 and 7 may be used as tie points for components at or near heater potential. For high-voltage and X-ray safety considerations, refer to page 93. Heater: volts (ac/dc), 3.15; ampere, 0.48.

**8MT****Flyback Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 38000● | volts |
| Peak Plate Current          | 110    | mA    |
| Average Plate Current       | 2.2    | mA    |
| Heater Voltage:             |        |       |
| Absolute maximum value      | 3.65   | volts |
| Absolute-minimum value      | 2.65   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA | 60 | volts |
|---|----|-------|

**X-RADIATION CHARACTERISTIC**

|  |    |       |
|--|----|-------|
| X-Radiation, Maximum:                                |    |       |
| Statistical value controlled on a lot sampling basis | 25 | mR/hr |


# Pulse duration must not exceed 15% of a horizontal scanning cycle.

● The dc component must not exceed 30000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

**3DG4****FULL-WAVE  
VACUUM RECTIFIER**

Glass octal type used in power supplies of color and black-and-white television receivers and other equipment having high dc requirements. Outline section, 19E; requires octal socket. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. For discussion of Rating Chart, refer to Interpretation of Tube Data. Filament: volts (ac/dc), 3.3; amperes, 3.8.

**5DE****Full-Wave Rectifier****MAXIMUM RATINGS (Design-Maximum Values)**

|   |                  |         |
|---|------------------|---------|
| Peak Inverse Plate Voltage                          | 1050             | volts   |
| Peak Plate Current (Per Plate)                      | 1.2              | amperes |
| Hot-Switching Transient Plate Current (Per Plate)   | 6.5              | amperes |
| AC Plate Supply Voltage (Per Plate, rms)            | See Rating Chart |         |
| DC Output Current (Per Plate)                       | See Rating Chart |         |
| Bulb Temperature (At hottest point on bulb surface) | 200              | °C      |

**TYPICAL OPERATION WITH CAPACITOR INPUT TO FILTER**

|   |     |       |
|---|-----|-------|
| AC Plate-to-Plate Supply Voltage (rms)          | 550 | volts |
| Filter-Input Capacitor*                         | 40  | μF    |
| Effective Plate-Supply Impedance per Plate      | 32  | ohms  |
| DC Output Voltage at Input to Filter (Approx.): |     |       |
| At full-load current of 350 mA                  | 300 | volts |



**CHARACTERISTICS**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 350 mA (per plate) | 25 | volts |
|---|----|-------|

\* Higher values of capacitance than indicated may be used, but the effective plate-supply impedance may have to be increased to prevent exceeding the maximum peak-plate-current rating.



RATING CHART

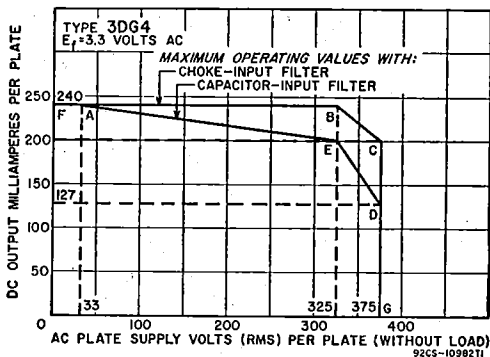

**HALF-WAVE  
VACUUM RECTIFIER**

**3DJ3**

Glass octal type used as a high-voltage rectifier to supply power to the anode of the picture tube in color television receivers. Outlines section, 14H; requires octal socket. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. For high-voltage and X-ray safety considerations, refer to page 93. Heater: volts (ac/dc), 3.15; ampere, 0.3.

**Flyback Rectifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |        |       |
|-----------------------------|--------|-------|
| Peak Inverse Plate Voltage# | 38000● | volts |
| Peak Plate Voltage          | 100    | mA    |
| Average Plate Current       | 2      | mA    |
| Heater Voltage:             |        |       |
| Absolute maximum value      | 3.65   | volts |
| Absolute-minimum value      | 2.66   | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 7 mA | 70 | volts |
|---|----|-------|

**X-RADIATION CHARACTERISTIC**

|  |    |       |
|--|----|-------|
| X-Radiation, maximum:                                |    |       |
| Statistical value controlled on a lot sampling basis | 25 | mR/hr |

# Pulse duration must not exceed 15% of a horizontal scanning cycle.

● The dc component must not exceed 30000 volts.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

Refer to type 6DK6.

**3DK6**

Refer to chart at end of section.

**3DT6**

Refer to type 6DT6A.

**3DT6A**

Refer to chart at end of section.

**3DZ4**

For replacement use type 3AF4A/3DZ4.

Refer to chart at end of section.

**3EA5**

Refer to chart at end of section.

**3EH7**

|                   |  |
|-------------------|--|
| <b>3EH7/XF183</b> | Refer to type 6EH7/EF183.  |
| <b>3EJ7</b>       | Refer to chart at end of section.  |
| <b>3EJ7/XF184</b> | Refer to type 6EJ7/EF184.  |
| <b>3ER5</b>       | Refer to type 6ER5.  |
| <b>3FH5</b>       | Refer to chart at end of section.  |
| <b>3FS5</b>       | Refer to type 6FS5.  |
| <b>3GK5</b>       | Refer to type 6GK5.  |
| <b>3GS8</b>       | Refer to chart at end of section.<br>For replacement use type 3BU8/3GS8. |
| <b>3GS8/3BU8</b>  | Refer to chart at end of section.  |
| <b>3HA5</b>       | Refer to chart at end of section.<br>For replacement use type 3HM5/3HA5. |
| <b>3HM5/3HA5</b>  | Refer to type 6HM5/6HA5.   |
| <b>3HQ5</b>       | Refer to type 6HQ5.  |
| <b>3HS8</b>       | Refer to chart at end of section.  |
| <b>3JC6</b>       | Refer to chart at end of section.  |
| <b>3JC6A</b>      | Refer to type 6JC6A.   |
| <b>3JD6</b>       | Refer to type 6JD6.  |
| <b>3KT6</b>       | Refer to type 6KT6.  |
| <b>3LF4</b>       | Refer to chart at end of section.  |
| <b>3Q4</b>        | Refer to chart at end of section.  |
| <b>3Q5GT</b>      | Refer to chart at end of section.  |
| <b>3S4</b>        | Refer to chart at end of section.  |
| <b>3V4</b>        | Refer to chart at end of section.  |
| <b>4AU6</b>       | Refer to type 6AU6A.   |
| <b>4AV6</b>       | Refer to type 6AV6.  |
| <b>4BC5</b>       | Refer to chart at end of section.  |
| <b>4BC8</b>       | Refer to type 6BC8.  |
| <b>4BL8</b>       | Refer to chart at end of section.  |
| <b>4BL8/XCF80</b> | Refer to type 6BL8/ECF80.  |
| <b>4BN6</b>       | Refer to type 6BN6.  |
| <b>4BQ7A</b>      | Refer to type 6BQ7A.   |


|   |                    |
|---|--------------------|
| Refer to chart at end of section.   | <b>4BQ7A/4BZ7</b>  |
| Refer to chart at end of section.<br>For replacement use type 4BQ7A/4BZ7. | <b>4BS8</b>        |
| Refer to chart at end of section.   | <b>4BU8</b>        |
| Refer to type 6BU8.   | <b>4BU8/4GS8</b>   |
| Refer to type 6BZ6.   | <b>4BZ6</b>        |
| Refer to chart at end of section.<br>For replacement use type 4BQ7A/4BZ7. | <b>4BZ7</b>        |
| Refer to type 6CB6A.  | <b>4CB6</b>        |
| Refer to type 6CS6.   | <b>4CS6</b>        |
| Refer to chart at end of section.   | <b>4CY5</b>        |
| Refer to type 6DE6.   | <b>4DE6</b>        |
| Refer to type 6DK6.   | <b>4DK6</b>        |
| Refer to chart at end of section.   | <b>4DT6</b>        |
| Refer to type 6DT6A.  | <b>4DT6A</b>       |
| Refer to chart at end of section.   | <b>4EH7</b>        |
| Refer to type 6EH7/EF183.   | <b>4EH7/LF183</b>  |
| Refer to chart at end of section.   | <b>4EJ7</b>        |
| Refer to type 6EJ7/EF184.   | <b>4EJ7/LF184</b>  |
| Refer to chart at end of section.   | <b>4ES8</b>        |
| Refer to chart at end of section.<br>For replacement use type 4KN8.       | <b>4ES8/XCC189</b> |
| Refer to chart at end of section.   | <b>4EW6</b>        |
| Refer to type 6GK5.   | <b>4GK5</b>        |
| Refer to type 6GJ7/ECF801.  | <b>4GJ7/XCF801</b> |
| Refer to chart at end of section.   | <b>4GM6</b>        |
| Refer to chart at end of section.<br>For replacement use type 4BU8/4GS8.  | <b>4GS8</b>        |
| Refer to chart at end of section.   | <b>4GS8/4BU8</b>   |
| Refer to chart at end of section.   | <b>4GX7</b>        |
| Refer to chart at end of section.   | <b>4GZ5</b>        |
| Refer to chart at end of section.   | <b>4HA5</b>        |
| Refer to type 6HA5.   | <b>4HA5/PC900</b>  |
| Refer to chart at end of section.   | <b>4HA7</b>        |

|                   |                                      |
|-------------------|--------------------------------------|
| <b>4HA7/4HC7</b>  | Refer to chart at end of section.    |
| <b>4HC7</b>       | Refer to chart at end of section.    |
| <b>4HM6</b>       | Refer to chart at end of section.    |
| <b>4HQ5</b>       | Refer to type 6HQ5.                  |
| <b>4HC7</b>       | Refer to chart at end of section.    |
| <b>4HS8</b>       | Refer to type 6HS8.                  |
| <b>4HT6</b>       | Refer to chart at end of section.    |
| <b>4JC6</b>       | Refer to chart at end of section.    |
| <b>4JC6A</b>      | Refer to type 6JC6A.                 |
| <b>4JD6</b>       | Refer to type 6JD6.                  |
| <b>4JH6</b>       | Refer to type 6JH6.                  |
| <b>4KE8</b>       | Refer to type 6KE8.                  |
| <b>4KN8/4RHH8</b> | Refer to chart at end of section.    |
| <b>4KT6</b>       | Refer to type 6KT6.                  |
| <b>4LJ8</b>       | Refer to type 6LJ8.                  |
| <b>4LU6</b>       | Refer to chart at end of section.    |
| <b>4RHH2</b>      | For replacement use type 4BQ7A/4BZ7  |
| <b>4RHH8</b>      | For replacement use type 4KN8/4RHH8. |
| <b>5AM8</b>       | Refer to type 6AM8A.                 |
| <b>5AN8</b>       | Refer to type 6AN8A.                 |
| <b>5AQ5</b>       | Refer to type 6AQ5A.                 |

## 5AR4/ GZ34

### FULL-WAVE VACUUM RECTIFIER

Glass octal type used in power supply of television receivers and other equipment having high dc requirements. Outlines section, 13F; requires octal socket. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater: volts (ac/dc), 5; amperes, 1.9.



#### Full-Wave Rectifier

##### MAXIMUM RATINGS (Design-Maximum Values)

|  |                  |         |
|--|------------------|---------|
| Peak Inverse Plate Voltage .....                             | 1700             | volts   |
| Peak Plate Current (Per Plate) .....                         | 825              | mA      |
| Hot-Switching Transient Plate Current (Per Plate) .....      | 8.7              | amperes |
| AC Plate-Supply Voltage (Per Plate, rms, without load) ..... | See Rating Chart |         |
| Average Output Current (Per Plate) .....                     | See Rating Chart |         |

**TYPICAL OPERATION WITH CAPACITOR INPUT TO FILTER**

|  |     |     |       |
|--|-----|-----|-------|
| AC Plate-to-Plate Supply Voltage (rms) .....     | 450 | 550 | volts |
| Effective Plate-Supply Impedance per Plate ..... | 160 | 200 | ohms  |
| Average Output Current .....                     | 225 | 160 | mA    |
| DC Output Voltage at Input to Filter .....       | 475 | 620 | volts |


**TYPICAL OPERATION WITH CHOKE INPUT TO FILTER**

|  |     |     |         |
|--|-----|-----|---------|
| AC Plate-to-Plate Supply Voltage (rms) ..... | 450 | 550 | volts   |
| Filter Input Choke .....                     | 10  | 10  | henries |
| Average Output Current .....                 | 250 | 225 | mA      |
| DC Output Voltage at Input to Filter .....   | 375 | 465 | volts   |

**CHARACTERISTIC, Instantaneous Value**

|  |   |    |       |
|--|---|----|-------|
| Tube Voltage Drop for plate current of 225 mA<br>(Per Plate) ..... | — | 17 | volts |
|--|---|----|-------|

**RATING CHART**

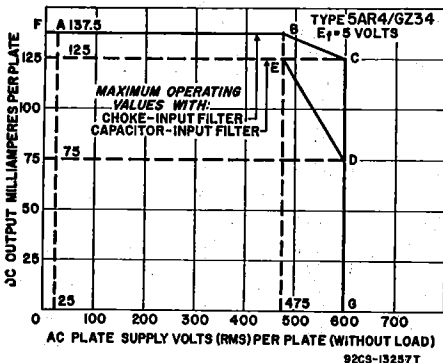


Refer to chart at end of section.

**5AS4**

**FULL-WAVE  
VACUUM RECTIFIER**

**5AS4A**



**5T**

Glass octal type used in power supplies of television receivers having high dc requirements. Outlines section, 19D; requires octal socket. This type may be supplied with pins 3, 5, and 7 omitted. Vertical mounting is preferred, but horizontal mounting is permissible if pins 1 and 4 are in vertical plane. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater: volts (ac), 5; amperes, 3. For maximum ratings, typical operation, and curves, refer to type 5U4GB.

Refer to chart at end of section.

**5AS8**

Refer to type 6AT8A.

**5AT8**

Refer to chart at end of section.

For replacement use type 5V3A/5AU4.

**5AU4**

Refer to chart at end of section.

**5AV8**

Refer to chart at end of section.

**5AW4**

Refer to chart at end of section.

**5AZ4**

Refer to chart at end of section.


**5B8**

Refer to chart at end of section.

**5BC3**

**5BC3A****FULL-WAVE  
VACUUM RECTIFIER**

Novar types used in power supplies of radio equipment and television receivers having high dc requirements. Outlines section, 31C; requires novar 9-contact socket. Vertical operation is preferred, but tubes may be operated in horizontal position if pins 2 and 7 are in vertical plane. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. Filament: volts (ac), 5; amperes, 3.

**Full-Wave Rectifier****MAXIMUM RATINGS (Design-Maximum Values)**

|  |                  |         |
|--|------------------|---------|
| Peak Inverse Plate Voltage .....                                     | 1700             | volts   |
| Peak Plate Current (Per Plate) .....                                 | 1                | ampere  |
| Hot-Switching Transient Plate Current (Per Plate) <sup>o</sup> ..... | 5                | amperes |
| AC Plate-Supply Voltage (Per Plate, rms) .....                       | See Rating Chart |         |
| Average Output Current (Per Plate) .....                             | See Rating Chart |         |

**TYPICAL OPERATION WITH CAPACITOR INPUT TO FILTER**


|  |     |     |      |       |
|--|-----|-----|------|-------|
| AC Plate-to-Plate Supply Voltage (rms) .....           | 600 | 900 | 1100 | volts |
| Filter-Input Capacitor <sup>■</sup> .....              | 40  | 40  | 40   | μF    |
| Total Effective Plate-Supply Impedance per Plate ..... | 21  | 67  | 97   | ohms  |
| DC Output Voltage at Input to Filter (Approx.):        |     |     |      |       |
| At load current of: 300 mA .....                       | 290 | —   | —    | volts |
| 275 mA .....   | —   | 460 | —    | volts |
| 162 mA .....   | —   | —   | 630  | volts |
| 150 mA .....   | 335 | —   | —    | volts |
| 137.5 mA .....   | —   | 520 | —    | volts |
| 81 mA .....  | —   | —   | 650  | volts |

**TYPICAL OPERATION WITH CHOKE INPUT TO FILTER**

|   |     |      |         |
|---|-----|------|---------|
| AC Plate-to-Plate Supply Voltage (rms) .....    | 900 | 1100 | volts   |
| Filter-Input Choke .....                        | 10  | 10   | henries |
| DC Output Voltage at Input to Filter (Approx.): |     |      |         |
| At load current of: 348 mA .....                | 340 | —    | volts   |
| 275 mA .....                                    | —   | 440  | volts   |
| 174 mA .....                                    | 355 | —    | volts   |
| 137.5 mA .....                                  | —   | 445  | volts   |

<sup>o</sup> If hot switching is regularly required in operation, the use of choke-input circuits is recommended. Such circuits limit the hot-switching current to a value no higher than that of the peak plate current. When capacitor-input circuits are used, a maximum peak current value per plate of 5 amperes during the initial cycles of the hot-switching transient should not be exceeded.

<sup>■</sup> Higher values of capacitance than indicated may be used, but the effective plate-supply impedance may have to be increased to prevent exceeding the maximum rating for peak plate current.

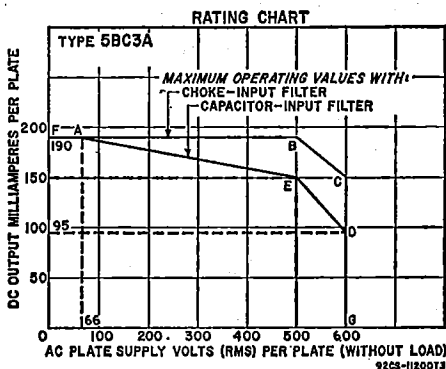

|                                     |                                   |
|-------------------------------------|-----------------------------------|
| Refer to chart at end of section.   | <b>5BE8</b>                       |
| Refer to type 6BK7B.                | <b>5BK7A</b>                      |
| Refer to type 6BQ7A.                | <b>5BQ7A</b>                      |
| Refer to type 6BR8A.                | <b>5BR8</b><br><b>5BR8/5FV8</b>   |
| Refer to chart at end of section.   | <b>5BT8</b>                       |
| Refer to chart at end of section.   | <b>5BW8</b>                       |
| Refer to type 6CG8A.                | <b>5CG8</b>                       |
| Refer to chart at end of section.   | <b>5CL8</b>                       |
| Refer to type 6CL8A.                | <b>5CL8A</b>                      |
| Refer to chart at end of section.   | <b>5CM8</b>                       |
| Refer to chart at end of section.   | <b>5CQ8</b>                       |
| Refer to type 6CZ5.                 | <b>5CZ5</b>                       |
| Refer to chart at end of section.   | <b>5DH8</b>                       |
| Refer to chart at end of section.   | <b>5DJ4</b>                       |
| Refer to type 6EA8.                 | <b>5EA8</b>                       |
| Refer to chart at end of section.   | <b>5ES8</b><br><b>5ES8/YCC189</b> |
| Refer to chart at end of section.   | <b>5EU8</b>                       |
| Refer to type 6EW6.                 | <b>5EW6</b>                       |
| Refer to type 6FG7.                 | <b>5FG7</b>                       |
| Refer to chart at end of section.   | <b>5FV8</b>                       |
| For replacement use type 5BR8/5FV8. | <b>5FV8</b>                       |
| Refer to type 6GH8A.                | <b>5GH8A</b>                      |
| Refer to chart at end of section.   | <b>5GJ7</b>                       |
| Refer to 6GJ7/ECF801.               | <b>5GJ7/LCF801</b>                |
| Refer to type 6GM6.                 | <b>5GM6</b>                       |
| Refer to type 6GS7.                 | <b>5GS7</b>                       |
| Refer to chart at end of section.   | <b>5GX6</b>                       |
| For replacement use type 5HZ6.      | <b>5GX6</b>                       |
| Refer to chart at end of section.   | <b>5GX7</b>                       |
| Refer to chart at end of section.   | <b>5HA7</b>                       |
| Refer to type 6HB7.                 | <b>5HB7</b>                       |

**5HG8**

Refer to chart at end of section.

**5HG8/LCF86**

Refer to type 6HG8/ECF86.

**5HZ6**

Refer to type 6HZ6.

**5J6**

Refer to type 6J6A.

**5JK6**

Refer to chart at end of section.

**5JL6**


Refer to chart at end of section.

**5JW8**

Refer to type 6JW8/ECF802.

**5KD8****MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used as combined vhf oscillator and mixer tube in television receivers. Outlines section, 6B; requires miniature 9-contact socket.

**9AE**

|                              |          |         |
|------------------------------|----------|---------|
| Heater Voltage (ac/dc) ..... | 5.6      | volts   |
| Heater Current .....         | 0.45     | ampere  |
| Heater Warm-up Time .....    | 11       | seconds |
| Heater-Cathode Voltage:      |          |         |
| Peak value .....             | ±200 max | volts   |
| Average value .....          | 100 max  | volts   |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage .....   | 330         | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —           | 330                | volts |
| Grid-No.2 Voltage .....                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0           | 0                  | volts |
| Plate Dissipation .....                                     | 2.5         | 3                  | watts |
| Grid-No.2 Input:  |             | 0.55               | watt  |
| For grid-No.2 voltages up to 165 volts .....                | —           | —                  |       |
| For grid-No.2 voltages between 165 and 330 volts .....      | —           | See curve page 300 |       |

**CHARACTERISTICS**

|  |      |      |        |
|--|------|------|--------|
| Plate Voltage .....  | 125  | 125  | volts  |
| Grid-No.2 Voltage .....                                      | —    | 110  | volts  |
| Grid-No.1 Voltage .....                                      | —1   | —1   | volt   |
| Amplification Factor .....                                   | 40   | —    |        |
| Plate Resistance (Approx.) .....                             | —    | 0.2  | megohm |
| Transconductance .....                                       | 7500 | 5000 | μmhos  |
| Plate Current .....  | 13.5 | 9.5  | mA     |
| Grid-No.2 Current .....                                      | —    | 3.5  | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA ..... | —9   | —8   | volts  |

**MAXIMUM CIRCUIT VALUES**

|                                  |  |     |        |
|----------------------------------|--|-----|--------|
| Grid-No.1-Circuit Resistance:    |  |     |        |
| For fixed-bias operation .....   |  | 0.5 | megohm |
| For cathode-bias operation ..... |  | 1   | megohm |

**5KE8**

Refer to type 6KE8.

**5KZ8**

Refer to type 6KZ8.



Refer to type 6LJ8.

5LJ8

Refer to type 6MB8.


5MB8

For replacement use type 5J6.

5MHH3

Refer to type 6MQ8.

5MQ8



5T

**FULL-WAVE  
VACUUM RECTIFIER**

**5R4GYB**  
INDUSTRIAL  
TYPE

Glass octal type for industrial and military applications. Outlines section, 19D; requires octal socket. Tube has a Micanol base.

|                          |  |         |
|--------------------------|--|---------|
| Filament Voltage (ac/dc) | 5  | volts   |
| Filament Current         | 2  | amperes |
| Operating Position       | Vertical, base down or up, or Horizontal with pins 2 and 4 in vertical plane |         |

**Full-Wave Rectifier**

**MAXIMUM RATINGS (Absolute-Maximum Values)**

|   |                  |       |       |
|---|------------------|-------|-------|
| For altitudes up to                                   | 40000            | 20000 | feet  |
| Peak Inverse Plate Voltage                            | 2650             | 3100  | volts |
| AC Plate Supply Voltage Per Plate (RMS, without load) | See Rating Chart |       |       |
| Peak Plate Current Per Plate                          | 715              | 715   | mA    |
| DC Output Current Per Plate                           | See Rating Chart |       |       |
| Hot-Switching Transient Plate Current Per Plate       | *                | *     |       |
| Bulb Temperature (At hottest point on bulb surface)   | 230              | 230   | °C    |

**TYPICAL OPERATION (With Capacitor-Input Filter)**


|  |       |       |      |
|--|-------|-------|------|
| For altitudes up to                                  | 40000 | 20000 | feet |
| AC-Plate-to-Plate Supply Voltage (RMS, without load) | 1400  | 1500  | 2000 |
| Filter-Input Capacitor                               | 20    | 20    | 20   |
| Total Effective Plate Supply Impedance Per Plate**   | 225   | 250   | 375  |
| DC Output Voltage at Input to Filter (approx.):      |       |       |      |
| At half-load current of                              |       | 910   | 1210 |
| 75 mA  | —     | —     | —    |
| 125 mA   | 750   | —     | —    |
| 150 mA   | —     | 800   | 1040 |
| At full-load current of                              | 605   | —     | —    |
| 250 mA   | —     | —     | —    |
| Voltage Regulation (approx.):                        |       |       |      |
| Half-load to full-load current                       | 145   | 110   | 170  |
| DC Output Current                                    | 250   | 150   | 150  |

**TYPICAL OPERATION (With Choke-Input Filter)**

|   |       |       |         |
|---|-------|-------|---------|
| For altitudes up to   | 40000 | 20000 | feet    |
| AC Plate-to-Plate Supply Voltage (RMS, without load)          | 1500  | 1900  | volts   |
| Filter-Input Choke  | 5     | 10    | henries |
| DC Output Voltage at Input to Filter for dc output (approx.): |       |       |         |
| 87.5 mA   | —     | 800   | volts   |
| 125 mA  | 600   | —     | volts   |
| 175 mA  | —     | 760   | volts   |
| 250 mA  | 560   | —     | volts   |
| Voltage Regulation (Approx.):                                 |       |       |         |
| Half-load to full-load current                                | 40    | 40    | volts   |
| DC Output Current   | 250   | 175   | mA      |

\* If hot-switching is required in operation, choke-input circuits are recommended. Such circuits limit the hot-switching current to a value no higher than that of the peak plate current. When capacitor-input circuits are used, a maximum value of 3 amperes should not be exceeded.

\*\* Indicated values for conditions shown will limit peak plate current to the maximum-rated value. When a filter-input capacitor larger than 20  $\mu$ f is used, it may be necessary to increase plate-supply impedance to a higher value than that shown in the data to limit the peak plate current to the maximum-rated value.

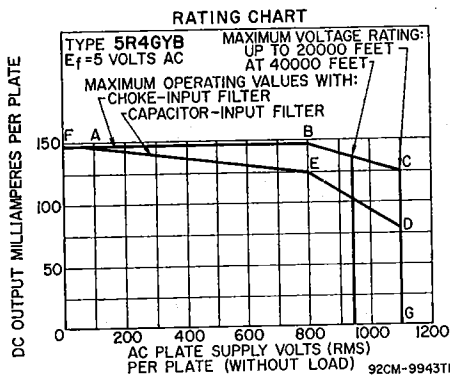


**5T4** Refer to chart at end of section.

**5T8** Refer to type 6T8A.

**5U4G** Refer to chart at end of section.

## 5U4GB FULL-WAVE VACUUM RECTIFIER

Glass octal type used in power supplies of radio and color and black-and-white television receivers having high dc requirements. Outlines section, 19E; requires octal socket. This type may be supplied with pins 3, 5, and 7 omitted. Vertical mounting is preferred, but horizontal mounting is permissible if pins 1 and 4 are in vertical plane. The coated filament is designed to operate from the ac line through a step-down transformer. The voltage at the filament terminals should be 5 volts at an average line voltage of 117 volts. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. For discussion of Rating Chart and Operation Characteristics, refer to Interpretation of Tube Data. Filament: volts (ac), 5; amperes, 3.




### Full-Wave Rectifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |      |                  |
|---|------|------------------|
| Peak Inverse Plate Voltage .....                        | 1550 | volts            |
| Peak Plate Current (Per Plate) .....                    | 1    | ampere           |
| Hot-Switching Transient Plate Current (Per Plate) ..... | #    |                  |
| AC Plate Supply Voltage (Per Plate, rms) .....          |      | See Rating Chart |
| Average Output Current (Per Plate) .....                |      | See Rating Chart |

#### TYPICAL OPERATION WITH CAPACITOR INPUT TO FILTER

|  |     |     |      |         |
|--|-----|-----|------|---------|
| AC Plate-to-Plate Supply Voltage (rms) .....           | 600 | 900 | 1100 | volts   |
| Filter-Input Capacitor* .....                          | 40  | 40  | 40   | $\mu$ F |
| Total Effective Plate-Supply Impedance per Plate ..... | 21  | 67  | 97   | ohms    |
| DC Output Voltage at Input to Filter (Approx.):        |     |     |      |         |
| At full-load current of                                | {   |     |      |         |
| 150 mA .....   | 335 | —   | —    | volts   |
| 137.5 mA .....   | —   | 520 | —    | volts   |
| 81 mA .....  | —   | —   | 680  | volts   |
| At half-load current of                                | {   |     |      |         |
| 300 mA .....   | 290 | —   | —    | volts   |
| 275 mA .....   | —   | 460 | —    | volts   |
| 162 mA .....   | —   | —   | 680  | volts   |
| Voltage Regulation (Approx.):                          |     |     |      |         |
| Half-load to full-load current .....                   | 45  | 60  | 50   | volts   |


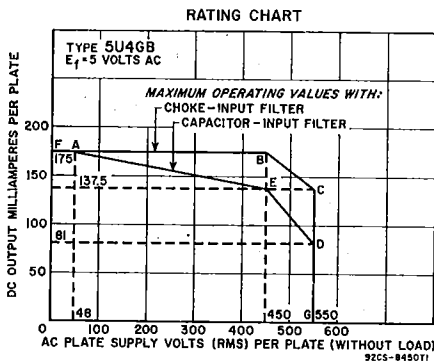


**TYPICAL OPERATION WITH CHOKE INPUT TO FILTER**

|   |     |      |         |
|---|-----|------|---------|
| AC Plate-to-Plate Supply Voltage (rms) .....    | 900 | 1100 | volts   |
| Filter-Input Choke .....                        | 10  | 10   | henries |
| DC Output Voltage at Input to Filter (Approx.): |     |      |         |
| At half-load current of { 174 mA .....          | 355 | —    | volts   |
| { 137.5 mA .....                                | —   | 455  | volts   |
| At full-load current of { 348 mA .....          | 340 | —    | volts   |
| { 275 mA .....                                  | —   | 440  | volts   |
| Voltage Regulation (Approx.):                   |     |      |         |
| Half-load to full-load current .....            | 15  | 15   | volts   |

# If hot switching is regularly required in operation, the use of choke-input circuits is recommended. Such circuits limit the hot-switching current to a value no higher than that of the peak plate current. When capacitor-input circuits are used, a maximum peak current value per plate of 4.6 amperes during the initial cycles of the hot-switching transient should not be exceeded.

\* Higher values of capacitance than indicated may be used, but the effective plate-supply impedance may have to be increased to prevent exceeding the maximum rating for peak plate current.

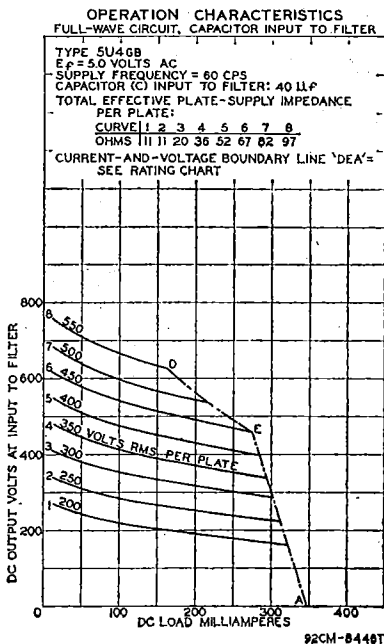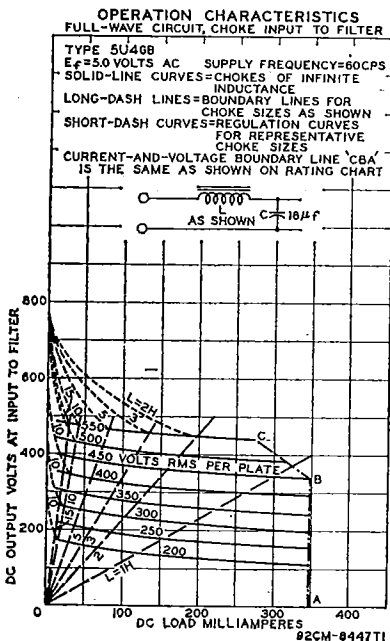

5U8

Refer to type 6U8A.

5U9/LCF201

Refer to chart at end of section.


5V3

Refer to chart at end of section.

# 5V3A 5V3A/5AU4

## FULL-WAVE VACUUM RECTIFIER

Glass octal type used in power supplies of color and black-and-white television receivers and other equipment having high dc requirements. Outlines section, 19E; requires octal socket. Vertical mounting is preferred, but horizontal mounting is permissible if pins 2 and 4 are in vertical plane. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. For discussion of Rating Chart, refer to Interpretation of Tube Data. Filament: volts (ac/dc), 5; amperes, 3.



### Full-Wave Rectifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|  |      |         |
|--|------|---------|
| Peak Inverse Plate Voltage .....                             | 1550 | volts   |
| Peak Plate Current (Per Plate) .....                         | 1.4  | amperes |
| Hot-Switching Transient Plate Current (Per Plate) .....      | 6.6  | amperes |
| AC Plate-Supply Voltage (Per Plate, rms, without load) ..... | 550  | volts   |
| Average Output Current (Per Plate) .....                     | 415° | mA      |

° With capacitor-input filter for ac plate-supply volts (rms, per plate, without load) = 470.


#### TYPICAL OPERATION

|  | Capacitor | Choke |         |
|--|-----------|-------|---------|
| AC Plate-to-Plate Supply Voltage (rms) .....     | 850       | 1000  | volts   |
| Filter-Input Capacitor* .....                    | 40        | —     | μF      |
| Effective Plate-Supply Impedance per Plate ..... | 50        | —     | ohms    |
| Minimum Filter-Input Choke .....                 | —         | 10    | henries |
| Average Output Current .....                     | 350       | 350   | mA      |
| DC Output at Input to Filter (Approx.) .....     | 440       | 390   | volts   |

#### CHARACTERISTIC


Tube Voltage Drop for plate current of 350 mA (per plate) .... 42 volts

\* When capacitor values greater than 40 μF are used, the effective plate-supply impedance should be increased so that the maximum rating for peak plate current is not exceeded.

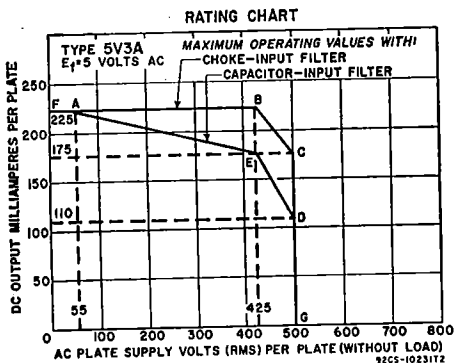

5V4G

Refer to chart at end of section.



5L

## FULL-WAVE VACUUM RECTIFIER

# 5V4GA

Glass octal type used in full-wave power supplies having high dc requirements. Outlines section, 19B; requires octal socket. The heater is designed to operate from the ac line through a step-down transformer. The voltage at the heater terminals should be 5 volts under operating conditions at an average line voltage of 117 volts. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. Heater: volts (ac/dc) 5; amperes, 2.

### Full-Wave Rectifier

#### MAXIMUM RATINGS (Design-Center Values)


|   |      |       |
|---|------|-------|
| Peak Inverse Plate Voltage .....          | 1400 | volts |
| AC Plate-Supply Voltage (Per Plate, rms): |      |       |
| With capacitor-input filter .....         | 375  | volts |
| With choke-input filter .....             | 500  | volts |
| Peak Plate Current (Per Plate) .....      | 525  | mA    |
| Average Output Current .....              | 175  | mA    |

#### TYPICAL OPERATION

| Filter Input  | Capacitor | Choke |         |
|---|-----------|-------|---------|
| AC Plate-to-Plate Supply Voltage (rms) .....        | 750       | 1000  | volts   |
| Filter-Input Capacitor* .....                       | 10        | —     | $\mu$ F |
| Total Effective Plate-Supply Impedance per Plate .. | 100       | —     | ohms    |
| Filter-Input Choke .....                            | —         | 4     | henries |
| DC Output Voltage at Input to Filter (Approx.):     |           |       |         |
| At output current of 175 mA .....                   | 410       | 410   | volts   |

\* Higher values of capacitance than indicated may be used, but the effective plate-supply impedance may have to be increased to prevent exceeding the maximum rating for peak plate current.

#### OPERATION CHARACTERISTICS FULL-WAVE RECTIFIER CIRCUIT

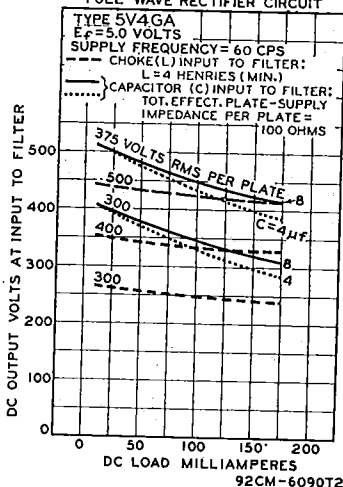

Refer to chart at end of section.

5V6GT

Refer to chart at end of section.

5W4  
5W4GT

Refer to chart at end of section.

5X4G

5X8


Refer to type 6X8A.

5Y3G

Refer to chart at end of section.

**5Y3GT****FULL-WAVE  
VACUUM RECTIFIER**

Glass octal type used in power supplies of radio and television equipment having moderate dc requirements. Outlines section, 13E; requires octal socket. Vertical mounting is preferred, but horizontal mounting is permissible if pins 2 and 8 are in horizontal plane. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. For discussion of Rating Chart and Operating Characteristics, refer to Interpretation of Tube Data. Filament: volts (ac), 5; amperes, 2.

**5T****Full-Wave Rectifier****MAXIMUM RATINGS (Design-Center Values)**


|   |                  |         |
|---|------------------|---------|
| Peak Inverse Plate Voltage                        | 1400             | volts   |
| Peak Plate Current (Per Plate)                    | 440              | mA      |
| Hot-Switching Transient Plate Current (Per Plate) | 2.5              | amperes |
| AC Plate Supply Voltage (Per Plate, rms)          | See Rating Chart |         |
| DC Output Current (Per Plate)                     | See Rating Chart |         |

**TYPICAL OPERATION WITH CAPACITOR INPUT TO FILTER**

|   |         |      |         |
|---|---------|------|---------|
| AC Plate-to-Plate Supply Voltage (rms)          | 700     | 1000 | volts   |
| Filter Input Capacitor*                         | 20      | 10   | $\mu$ F |
| Effective Plate-Supply Impedance per Plate      | 50      | 140  | ohms    |
| DC Output Voltage at Input to Filter (Approx.): |         |      |         |
| At half-load current of                         | 62.5 mA | 390  | volts   |
|   | 42 mA   | 610  | volts   |
| At full-load current of                         | 125 mA  | 360  | volts   |
|   | 84 mA   | 560  | volts   |
| Voltage Regulation (Approx.):                   |         |      |         |
| Half-load to full-load current                  | 40      | 50   | volts   |



**TYPICAL OPERATION WITH CHOKE INPUT TO FILTER**

|   |         |      |         |
|---|---------|------|---------|
| AC Plate-to-Plate Supply Voltage (rms)          | 700     | 1000 | volts   |
| Filter Input Choke#                             | 10      | 10   | henries |
| DC Output Voltage at Input to Filter (Approx.): |         |      |         |
| At half-load current of                         | 75 mA   | 270  | volts   |
|   | 62.5 mA | 405  | volts   |
| At full-load current of                         | 150 mA  | 245  | volts   |
|   | 125 mA  | 380  | volts   |
| Voltage Regulation (Approx.):                   |         |      |         |
| Half-load to full-load current                  | 25      | 15   | volts   |

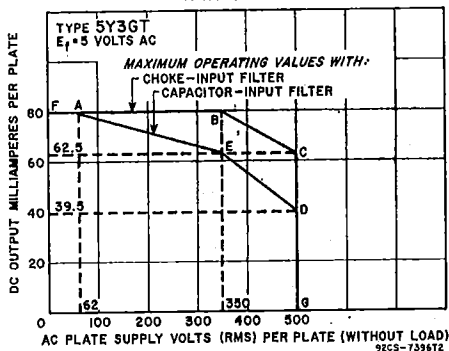**RATING CHART**

\* Higher values of capacitance than indicated may be used but the effective plate supply impedance may have to be increased to prevent exceeding the maximum rating for hot-switching transient plate current.

# This value is adequate to maintain optimum regulation in the region to the right of line L = 10H on curve OPERATION CHARACTERISTICS with Choke Input to Filter, provided the load currents are not less than 35 mA and 50 mA, respectively, for plate-to-plate supply voltages of 700 and 1000 volts (rms).

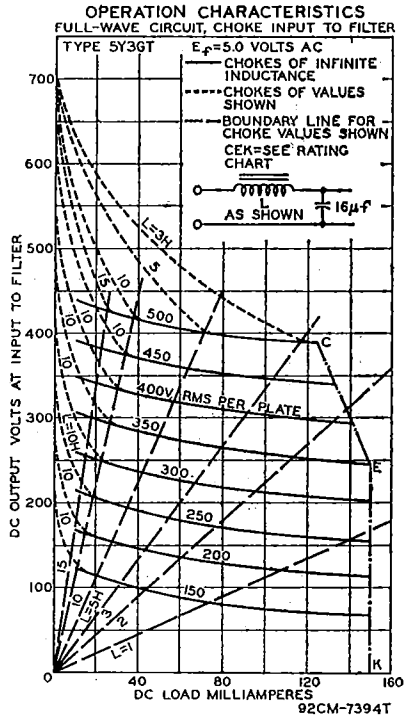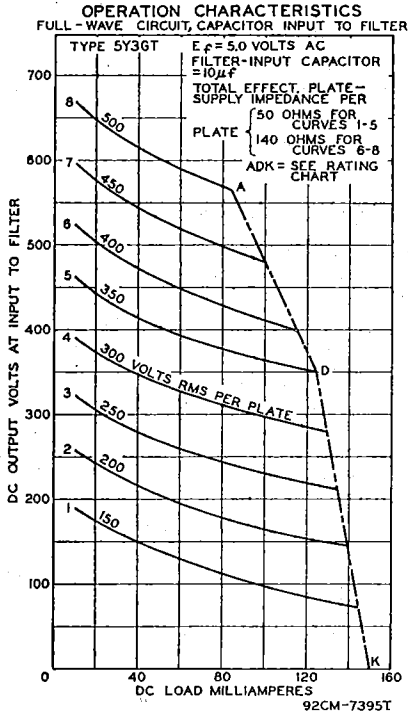

Refer to chart at end of section.

**5Y4G**

Refer to chart at end of section.

**5Y4GA  
5Y4GT**

Refer to chart at end of section.

**5Z3**

Refer to chart at end of section.  
For replacement use type 5Y3GT.

**5Z4**

Refer to chart at end of section.

**6A3**

Refer to chart at end of section.

**6A6**

Refer to chart at end of section.

**6A7**

Refer to chart at end of section.

**6A7S**

Refer to chart at end of section.


**6A8**

Refer to chart at end of section.

**6A8G  
6A8GT**

**6AB4****HIGH-MU TRIODE**

Miniature type used as cathode-drive amplifier, frequency converter, or oscillator at frequencies up to 300 MHz in television and FM receivers. Outlines section, 5C; requires miniature 7-contact socket. Heater: volts (ac/dc), 6.3; amperes, 0.15. For operation as resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section. For maximum ratings, characteristics, and curves refer to type 12AT7.

**5CE****6AB5/6N5**

Refer to chart at end of section.

**6AB7**

Refer to chart at end of section.

**6AC5GT**

Refer to chart at end of section.

**6AC7**


Refer to chart at end of section.

**6AC7W**

Refer to chart at end of section.

**6AC10****HIGH-MU TRIPLE TRIODE**

Duodecar type used in matrixing (color-difference) circuits of color television receivers. Outlines section, 8B; requires duodecar 12-contact socket. Types 8AC10 and 12AC10A are identical with type 6AC10 except for heater ratings.

**12FE**

|                               | 6AC10    | 8AC10    | 12AC10A  |         |
|-------------------------------|----------|----------|----------|---------|
| Heater Voltage (ac/dc)        | 6.3      | 8.4      | 12.5     | volts   |
| Heater Current                | 0.6      | 0.45     | 0.3      | ampere  |
| Heater Warm-up Time (Average) | 11       | 11       | 11       | seconds |
| Heater-Cathode Voltage:       |          |          |          | volts   |
| Peak value                    | ±200 max | ±200 max | ±200 max | volts   |
| Average value                 | 100 max  | 100 max  | 100 max  | volts   |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|                   |     |       |
|-------------------|-----|-------|
| Plate Voltage     | 330 | volts |
| Plate Dissipation | 2   | watts |

**CHARACTERISTICS**

|  |       |       |
|--|-------|-------|
| Plate Voltage                                      | 200   | volts |
| Cathode-Bias Resistor                              | 150   | ohms  |
| Amplification Factor                               | 62    |       |
| Plate Resistance (Approx.)                         | 10700 | ohms  |
| Transconductance                                   | 5800  | μmhos |
| Plate Current                                      | 9     | mA    |
| Grid Voltage (approx.) for plate current of 100 μA | -5    | volts |

**MAXIMUM CIRCUIT VALUE**

|                         |     |        |
|-------------------------|-----|--------|
| Grid-Circuit Resistance | 0.5 | megohm |
|-------------------------|-----|--------|

**6AD6G**


Refer to chart at end of section.

**6AD7G**

Refer to chart at end of section.

**6AD10****BEAM POWER TUBE—  
SHARP-CUTOFF PENTODE**

Duodecar type used as FM detector and audio-frequency output amplifier in color and black-and-white television receivers. Outlines section, 8B; requires duodecar 12-contact socket.

**12EZ**



|   |           |         |
|---|-----------|---------|
| Heater Voltage (ac/dc)  | 6.3       | volts   |
| Heater Current  | 1.05      | amperes |
| Heater-Cathode Voltage:   |           |         |
| Peak value  | ±200 max. | volts   |
| Average value   | 100 max.  | volts   |
| Direct Interelectrode Capacitances:   |           |         |
| Beam Power Unit:  |           |         |
| Grid No.1 to Plate  | 0.26      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield        | 11        | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield            | 11        | pF      |
| Pentode Unit:   |           |         |
| Grid No.1 to Plate  | 0.024     | pF      |
| Grid No.3 to Plate  | 3.4       | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield        | 8         | pF      |
| Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2, Plate,<br>and Internal Shield | 9.5       | pF      |
| Grid No.1 to Grid No.3  | 0.12      | pF      |
| Plate of Beam Power Unit to Plate of Pentode Unit                                 | 0.34      | pF      |

**Beam Power Unit as Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                 |     |       |
|---------------------------------|-----|-------|
| Plate Voltage                   | 275 | volts |
| Grid-No.2 (Screen-Grid) Voltage | 275 | volts |
| Plate Dissipation               | 10  | watts |
| Grid-No.2 Input                 | 2   | watts |

**TYPICAL OPERATION**

|                                  |      |          |
|----------------------------------|------|----------|
| Plate Voltage                    | 250  | volts    |
| Grid-No.2 Voltage                | 250  | volts    |
| Grid-No.1 (Control-Grid) Voltage | -8   | volts    |
| Peak AF Grid-No.1 Voltage        | 8    | volts    |
| Zero-Signal Plate Current        | 35   | mA       |
| Maximum-Signal Plate Current     | 39   | mA       |
| Zero-Signal Grid-No.2 Current    | 2.5  | mA       |
| Maximum-Signal Grid-No.2 Current | 7    | mA       |
| Plate Resistance (Approx.)       | 0.1  | megohm   |
| Transconductance                 | 6500 | μmhos    |
| Load Resistance                  | 5000 | ohms     |
| Total Harmonic Distortion        | 10   | per cent |
| Maximum-Signal Power Output      | 4.2  | watts    |

**MAXIMUM CIRCUIT VALUES**

|                               |      |        |
|-------------------------------|------|--------|
| Grid-No.1-Circuit Resistance: |      |        |
| For fixed-bias operation      | 0.25 | megohm |
| For cathode-bias operation    | 0.5  | megohm |

**Pentode Unit as Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|  |   |        |
|--|---|--------|
| Plate Supply Voltage                                   | 150   | volts  |
| Grid No.3 (Control Grid)                               | Connected to negative end of cathode resistor |        |
| Grid-No.2 (Screen-Grid) Voltage                        | 100   | volts  |
| Grid No.1 (Control Grid)                               | Connected to negative end of cathode resistor |        |
| Cathode-Bias Resistor                                  | 180   | ohms   |
| Plate Resistance (Approx.)                             | 0.11  | megohm |
| Transconductance, Grid No.1 to Plate                   | 3400  | μmhos  |
| Transconductance, Grid No.3 to Plate                   | 600   | μmhos  |
| Plate Current  | 3.2   | mA     |
| Grid-No.2 Current                                      | 3.2   | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA | -4.5  | volts  |
| Grid-No.3 Voltage (Approx.) for plate current of 20 μA | -7  | volts  |

**Pentode Unit as FM Sound Detector**

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |                    |       |
|--|--------------------|-------|
| Plate Voltage                                    | 300                | volts |
| Grid-No.3 Voltage:                               |                    |       |
| Negative-bias value                              | 100                | volts |
| Positive-bias value                              | 25                 | volts |
| Grid-No.2 Supply Voltage                         | 300                | volts |
| Grid-No.2 Voltage                                |                    |       |
| Grid-No.1 Voltage:                               |                    |       |
| Negative-bias value                              | See curve page 300 |       |
| Positive-bias value                              | -50                | volts |
| Positive-bias value                              | 0                  | volts |
| Plate Dissipation                                | 1.7                | watts |
| Grid-No.3 Input                                  | 0.1                | watt  |
| Grid-No.2 Input:                                 |                    |       |
| For grid-No.2 voltages up to 150 volts           | 1                  | watt  |
| For grid-No.2 voltages between 150 and 300 volts | See curve page 300 |       |

**MAXIMUM CIRCUIT VALUES**

|                                    |      |        |
|------------------------------------|------|--------|
| Grid-No.3-Circuit Resistance ..... | 0.68 | megohm |
| Grid-No.1-Circuit Resistance:      |      |        |
| For fixed-bias operation .....     | 0.22 | megohm |
| For cathode-bias operation .....   | 0.47 | megohm |

**6AE5GT** Refer to chart at end of section.

**6AE6G** Refer to chart at end of section.


**6AE7GT** Refer to chart at end of section.

**6AF3**

12AF3,  
12AF3/12BR3/12RK19

**HALF-WAVE  
VACUUM RECTIFIER**

Miniature type used as a damper tube in horizontal-deflection circuits of television receivers. Outlines section, 7C; requires miniature 9-contact socket. Socket terminals 1, 2, 3, 6, 7, and 8 should not be used as tie points. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Types 12AF3 and 12AF3/12BR3/12RK19 are identical with type 6AF3 except for heater ratings.

**9CB**

|                                     | 6AF3 | 12AF3<br>12AF3/12BR3/<br>12RK19 |         |
|-------------------------------------|------|---------------------------------|---------|
| Heater Voltage (ac/dc) .....        | 6.3  | 12.6                            | volts   |
| Heater Current .....                | 1.2  | 0.6                             | amperes |
| Heater Warm-up Time (Average) ..... | —    | 11                              | seconds |

**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |       |
|---|------|-------|-------|
| Peak Inverse Plate Voltage# .....         | 4500 | volts |       |
| Peak Plate Current .....                  | 750  | mA    |       |
| Average Plate Current .....               | 185  | mA    |       |
| Bulb Temperature (At hottest point) ..... | 210  | °C    |       |
| Heater-Cathode Voltage:                   |      |       |       |
| Peak value .....                          | +300 | —4500 | volts |
| Average value .....                       | +100 | —1000 | volts |


# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

**6AF4****6AF4A**

2AF4B/2DZ4,  
3AF4A/3DZ4

**MEDIUM-MU TRIODE**

Miniature types used as local oscillators in uhf television receivers covering the frequency range of 470 to 890 MHz. Outlines section, 5C and 5B, respectively; requires miniature 7-contact socket. Types 2AF4B/2DZ4 and 3AF4A/3DZ4 are identical with type 6AF4A except for heater and heater-cathode ratings.

**7DK**

|  | 2AF4B/<br>2DZ4 | 3AF4A/<br>3DZ4 | 6AF4<br>6AF4A |         |
|--|----------------|----------------|---------------|---------|
| Heater Voltage (ac/dc) .....                                 | 2.35           | 3.15           | 6.3           | volts   |
| Heater Current .....   | 0.6            | 0.45           | 0.225         | ampere  |
| Heater Warm-up Time (Average) .....                          | 11             | 11             | —             | seconds |
| Heater-Cathode Voltage:                                      |                |                |               |         |
| Peak value .....   | ±180 max       | ±50 max        | ±50 max       | volts   |
| Average value .....  | 100 max        | 25 max         | 25 max        | volts   |
| Direct Interelectrode Capacitances:*                         |                |                |               |         |
| Grid to Plate .....  |                |                | 1.9           | pF      |
| Grid to Cathode and Heater .....                             |                |                | 2.2           | pF      |
| Plate to Cathode and Heater .....                            |                |                | 1.4           | pF      |
| Heater to Cathode (External Shield connected to plate) ..... |                |                | 2.2           | pF      |

\* With external shield connected to cathode, except as noted.

Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|                                  |      |       |
|----------------------------------|------|-------|
| Plate Supply Voltage .....       | 80   | volts |
| Cathode-Bias Resistor .....      | 150  | ohms  |
| Amplification Factor .....       | 13.5 |       |
| Plate Resistance (Approx.) ..... | 2100 | ohms  |
| Transconductance .....           | 6500 | μmhos |
| Plate Current .....              | 17.5 | mA    |

UHF Oscillator



|   |     |       |
|---|-----|-------|
| MAXIMUM RATINGS (Design-Maximum Values) |     |       |
| Plate Voltage .....                     | 150 | volts |
| Grid Voltage, Negative-bias value ..... | 50  | volts |
| Grid Current .....                      | 2   | mA    |
| Plate Dissipation .....                 | 2.5 | watts |
| Average Cathode Current .....           | 24  | mA    |

TYPICAL OPERATION AS OSCILLATOR AT 1000 MHz

|                              |       |       |
|------------------------------|-------|-------|
| Plate Supply Voltage .....   | 100   | volts |
| Plate Resistor .....         | 220   | ohms  |
| Grid Resistor .....          | 10000 | ohms  |
| Grid Current .....           | 17    | mA    |
| Grid Current (Approx.) ..... | 750   | μA    |

MAXIMUM CIRCUIT VALUES

|                                  |     |                 |
|----------------------------------|-----|-----------------|
| Grid-Circuit Resistance:         |     |                 |
| For fixed-bias operation .....   |     | Not recommended |
| For cathode-bias operation ..... | 0.5 | megohm          |

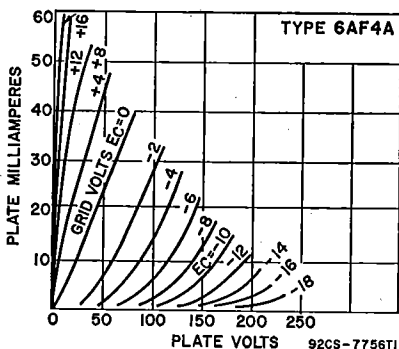

7AG

ELECTRON-RAY TUBE

6AF6G


Glass octal type used to indicate visually, by means of two shadows on the fluorescent target, the effects of changes in the controlling voltages. It is a twin-indicator type and is used as a convenient means of indicating accurate radio-receiver tuning. This type may be supplied with pin No. 1 omitted. Tube requires octal socket. Heater: volts (ac/dc), 6.3; amperes, 0.15. Maximum ratings in indicator service: fluorescent-target volts, 250 max, 125 min; ray-control-electrode supply volts, 250 max; peak heater-cathode volts, 90 max. Typical operation: fluorescent-target volts, 250; fluorescent-target mA, 3.75; ray-contact-electrode volts (approx. for 0° shadow angle), 155; ray-control-electrode volts (approx. for 100° shadow angle), 0.

# 6AF9

## DUAL PENTODE

11AF9

Miniature type used in television receiver applications. Unit No.1 is used as a video output pentode, and unit No.2 as a sound if amplifier, agc amplifier, or sync separator. Outlines section, 6L, except has 10-pin base; requires miniature 10-contact socket. Type 11AF9 is identical with type 6AF9 except for heater ratings.



|   | 6AF9     | 11AF9     |        |
|---|----------|-----------|--------|
| Heater Voltage (ac/dc)                            | 6.3      | 11.5      | volts  |
| Heater Current                                    | 0.85     | 0.45      | ampere |
| Peak Heater-Cathode Voltage                       | ±200 max | ±200 max  | volts  |
| <b>Direct Interelectrode Capacitances:</b>        |          |           |        |
| Plate to All Other Electrodes (except grid No.1)  | 7        | 11        | pF     |
| Grid No.1 to All Other Electrodes (except plate)  | 12       | 10        | pF     |
| Plate to Grid No.1                                | 0.105    | 0.140     | pF     |
| Grid No.1 to Heater                               | —        | 0.140     | pF     |
| Plate of Unit No.1 to Plate of Unit No. 2         |          | 0.150 max | pF     |
| Grid No.1 of Unit No.1 to Grid No.1 of Unit No. 2 |          | 0.010 max | pF     |
| Plate of Unit No.1 to Grid No.1 of Unit No.2      |          | 0.100 max | pF     |
| Plate of Unit No.2 to Grid No.1 of Unit No.1      |          | 0.005 max | pF     |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|  | Unit No.1 | Unit No.2 |       |
|--|-----------|-----------|-------|
| Plate Supply Voltage                   | 550       | 550       | volts |
| Plate Voltage                          | 250       | 250       | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage | 550       | 550       | volts |
| Grid-No.2 Voltage                      | 250       | 250       | volts |
| Cathode Current                        | 60        | 15        | mA    |
| Plate Dissipation                      | 5.1       | 1.5       | watts |
| Grid-No.2 Input                        | 2.5       | 0.5       | watts |

#### CHARACTERISTICS

|                                   |       |      |        |
|-----------------------------------|-------|------|--------|
| Plate Voltage                     | 170   | 150  | volts  |
| Grid-No.2 Voltage                 | 170   | 150  | volts  |
| Grid-No.1 (Control-Grid) Voltage  | -2.6  | -2.1 | volts  |
| Mu Factor, Grid No.1 to Grid No.2 | 38    | 38   |        |
| Internal Resistance               | 0.032 | 0.16 | megohm |
| Transconductance                  | 22000 | 8500 | μmhos  |
| Plate Current                     | 30    | 10   | mA     |
| Grid-No.2 Current                 | 7.2   | 3    | mA     |

#### MAXIMUM CIRCUIT VALUES


|                              |   |   |        |
|------------------------------|---|---|--------|
| Grid-No.1-Circuit Resistance | 1 | 1 | megohm |
|------------------------------|---|---|--------|

# 6AF11

## DUAL TRIODE—SHARP-CUTOFF PENTODE

15AF11

Duodecar type used in television receiver applications. The high-mu triode unit is used for agc keyer service, the medium-mu triode unit for sync separator service, and the pentode unit for video amplifier service. Outlines section, 8C; requires duodecar 12-contact socket. Type 15AF11 is identical with type 6AF11 except for heater ratings.



|                               | 6AF11    | 15AF11   |         |
|-------------------------------|----------|----------|---------|
| Heater Voltage (ac/dc)        | 6.3      | 14.7     | volts   |
| Heater Current                | 1.05     | 0.45     | amperes |
| Heater Warm-up Time (Average) | —        | 11       | seconds |
| Heater-Cathode Voltage:       |          |          |         |
| Peak value                    | ±200 max | ±200 max | volts   |
| Average value                 | 100 max  | 100 max  | volts   |

Class A<sub>1</sub> Amplifier


| MAXIMUM RATINGS (Design-Maximum Values)               | Triode Unit No.1 | Triode Unit No.2 | Pentode Unit       |       |
|---|------------------|------------------|--------------------|-------|
| Plate Voltage   | 330              | 330              | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —                | —                | 330                | volts |
| Grid-No.2 Voltage                                     | —                | —                | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0                | 0                | 0                  | volts |
| Plate Dissipation                                     | 1.1              | 2                | 5                  | watts |
| Grid-No.2 Input:                                      |                  |                  |                    |       |
| For grid-No.2 voltages up to 165 volts                | —                | —                | 1.25               | watts |
| For grid-No.2 voltages between 165 and 330 volts      | —                | —                | See curve page 300 |       |

CHARACTERISTICS

|   |       |      |       |       |
|---|-------|------|-------|-------|
| Plate Supply Voltage                                    | 200   | 200  | 250   | volts |
| Grid-No.2 Supply Voltage                                | —     | —    | 150   | volts |
| Grid-No.1 Voltage                                       | -2    | —    | —     | volts |
| Cathode-Bias Resistor                                   | —     | 220  | 100   | ohms  |
| Amplification Factor                                    | 68    | 41   | —     |       |
| Plate Resistance (Approx.)                              | 12400 | 9400 | 68000 | ohms  |
| Transconductance  | 5500  | 4400 | 11000 | μmhos |
| Plate Current   | 7     | 9.2  | 24    | mA    |
| Grid-No.2 Current                                       | —     | —    | 4.8   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | —     | -6.5 | -10   | volts |

MAXIMUM CIRCUIT VALUES

|                               |     |     |      |        |
|-------------------------------|-----|-----|------|--------|
| Grid-No.1-Circuit Resistance: |     |     |      |        |
| For fixed-bias operation      | 0.5 | 0.5 | 0.25 | megohm |
| For cathode-bias operation    | 1   | 1   | 1    | megohm |



7BD

SHARP-CUTOFF PENTODE

6AG5

Miniature type used in compact radio equipment as an rf or if amplifier up to 400 MHz. Outlines section, 5C; requires miniature 7-contact socket. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section.

|   |           |        |
|---|-----------|--------|
| Heater Voltage (ac/dc)  | 6.3       | volts  |
| Heater Current  | 0.3       | ampere |
| Direct Interelectrode Capacitances:                                     |           |        |
| Pentode Unit:   |           |        |
| Grid No.1 to Plate  | 0.030 max | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 6.5       | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 1.8       | pF     |
| Triode Unit:  |           |        |
| Grid No.1 to Plate and Grid No.2  | 2.5       | pF     |
| Grid No.1 to Cathode, Heater, Grid No.3, and Internal Shield            | 3.6       | pF     |
| Grid No.2 to Cathode, Heater, Grid No.3, and Internal Shield            | 3         | pF     |
| Plate to Cathode, Heater, Grid No.3, and Internal Shield                | 3         | pF     |

Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Center Values)                | Triode Connection* |     | Pentode Connection |                    |                    |
|---|--------------------|-----|--------------------|--------------------|--------------------|
| Plate Voltage   | 300                | 300 | 300                | 300                | 300                |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —                  | —   | 300                | 300                | 300                |
| Grid-No.2 Voltage                                     | —                  | —   | See curve page 300 | See curve page 300 | See curve page 300 |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0                  | 0   | 0                  | 0                  | 0                  |
| Plate Dissipation                                     | 2.5                | 2   | 2                  | 2                  | 2                  |
| Grid-No.2 Input:                                      |                    |     |                    |                    |                    |
| For grid-No.2 voltages up to 150 volts                | —                  | —   | 0.5                | 0.5                | 0.5                |
| For grid-No.2 voltages between 150 and 300 volts      | —                  | —   | See curve page 300 | See curve page 300 | See curve page 300 |

CHARACTERISTICS

|                            |       |      |      |      |      |        |
|----------------------------|-------|------|------|------|------|--------|
| Plate Supply Voltage       | 180   | 250  | 100  | 125  | 250  | volts  |
| Grid-No.2 Supply Voltage   | —     | —    | 100  | 125  | 150  | volts  |
| Cathode-Bias Resistor      | 330   | 820  | 180  | 100  | 180  | ohms   |
| Amplification Factor       | 45    | 42   | —    | —    | —    |        |
| Plate Resistance (Approx.) | 0.008 | 0.01 | 0.6  | 0.5  | 0.8  | megohm |
| Transconductance           | 5700  | 3800 | 4500 | 5100 | 5000 | μmhos  |
| Plate Current              | 7     | 5.5  | 4.5  | 7.2  | 6.5  | mA     |

|   | Triode Connection* | Pentode Connection |          |
|---|--------------------|--------------------|----------|
| Grid-No.2 Current .....   | —                  | 1.4                | 2 mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 10 $\mu$ A ..... | —                  | -5                 | -8 volts |

\* Grid No.2 connected to plate.


# 6AG7

## POWER PENTODE

Metal type used in output stage of video amplifier of color and black-and-white television receivers. Outlines section, 2B; requires octal socket.

|  |              |        |
|--|--------------|--------|
| Heater Voltage (ac/dc) .....   | 6.3          | volts  |
| Heater Current .....   | 0.65         | ampere |
| Peak Heater-Cathode Voltage .....  | $\pm 90$ max | volts  |
| Direct Interelectrode Capacitances:*   |              |        |
| Grid No.1 to Plate .....   | 0.06 max     | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, Shell, and Internal Shield ..... | 13           | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, Shell, and Internal Shield .....     | 7.5          | pF     |

\* Pins 1 and 3 connected to Pin No.5.



8Y

### Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Center Values)       |     |       |
|--|-----|-------|
| Plate Voltage .....                          | 300 | volts |
| Grid-No.2 Voltage .....                      | 300 | volts |
| Grid-No.1 Voltage, Positive-bias value ..... | 0   | volts |
| Plate Dissipation .....                      | 9   | watts |
| Grid-No.2 Input .....                        | 1.5 | watts |

### CHARACTERISTICS

|  |                                |            |
|--|--------------------------------|------------|
| Plate Voltage .....                    | 300                            | volts      |
| Grid No.3 (Suppressor Grid) .....      | Connected to cathode at socket |            |
| Grid-No.2 (Screen-Grid) Voltage .....  | 150                            | volts      |
| Grid-No.1 (Control-Grid) Voltage ..... | -3                             | volts      |
| Peak AF Grid-No.1 Voltage .....        | 3                              | volts      |
| Zero-Signal Grid-No.2 Current .....    | 30                             | mA         |
| Maximum-Signal Grid-No.2 Current ..... | 30.5                           | mA         |
| Zero-Signal Grid-No.2 Current .....    | 7                              | mA         |
| Maximum-Signal Grid-No.2 Current ..... | 9                              | mA         |
| Plate Resistance .....                 | 0.13                           | megohm     |
| Transconductance .....                 | 11000                          | $\mu$ mhos |
| Load Resistance .....                  | 10000                          | ohms       |
| Total Harmonic Distortion .....        | 7                              | per cent   |
| Maximum-Signal Power Output .....      | 3                              | watts      |

### MAXIMUM CIRCUIT VALUES

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 1    | megohm |


# 6AG7Y

Refer to chart at end of section.

# 6AG9

## MEDIUM-MU TRIODE—SHARP-CUTOFF PENTODE

Duodecar type with frame grid pentode unit used in color and black-and-white television receiver applications. The pentode unit is used as a video amplifier; the triode unit is used as an agc amplifier. Outlines section, 8C; requires duodecar 12-contact socket. Heater: volts (ac/dc), 6.3; amperes, 0.82; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.



12HE

Class A<sub>1</sub> Amplifier

**MAXIMUM RATINGS (Design-Maximum Values)**

|   | Triode Unit | Pentode Unit |       |
|---|-------------|--------------|-------|
| Plate Voltage   | 330         | 330          | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | —           | 200          | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0            | volts |
| Plate Dissipation                                     | 1.1         | 10           | watts |
| Grid-No.2 Input                                       | —           | 1.5          | watts |

**CHARACTERISTICS**

|   |      |     |       |       |
|---|------|-----|-------|-------|
| Plate Voltage   | 150  | 55  | 250   | volts |
| Grid-No.2 Voltage                                       | —    | 125 | 150   | volts |
| Grid-No.1 Voltage                                       | —    | 0   | —     | volts |
| Cathode-Bias Resistor                                   | 350  | —   | 56    | ohms  |
| Amplification Factor                                    | 39   | —   | —     | —     |
| Plate Resistance (Approx.)                              | 8500 | —   | 40000 | ohms  |
| Transconductance  | 4600 | —   | 30000 | μmhos |
| Plate Current   | 6.2  | 56  | 28    | mA    |
| Grid-No.2 Current                                       | —    | 21  | 5.6   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA  | —7   | —   | —     | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | —    | —   | —5.4  | volts |

**MAXIMUM CIRCUIT VALUES**

|                               |     |      |        |
|-------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance: |     |      |        |
| For fixed-bias operation      | 0.5 | 0.1  | megohm |
| For cathode-bias operation    | 1   | 0.25 | megohm |

Refer to chart at end of section.

**6AG11**

Refer to chart at end of section.


**6AH4GT**

Refer to chart at end of section.

**6AH6**

Refer to chart at end of section.

**6AH9**



**7BD**

**SHARP-CUTOFF PENTODE**

**6AK5  
6AK5/  
EF95**

Miniature types used as rf or if amplifiers especially in high-frequency wide-band applications at frequencies up to 400 MHz. Outlines section, 5B; require miniature 7-contact socket.

|   |          |        |
|---|----------|--------|
| Heater Voltage (ac/dc)  | 6.3      | volts  |
| Heater Current  | 0.175    | ampere |
| Peak Heater-Cathode Voltage   | ±90 max  | volts  |
| Direct Interelectrode Capacitances (Approx.):*                          |          |        |
| Grid No.1 to Plate  | 0.02 max | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 4        | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 2.8      | pF     |

\* With external shield connected to pin 2 or 7.

Class A<sub>1</sub> Amplifier

**MAXIMUM RATINGS (Design-Center Values)**


|   |                    |       |
|---|--------------------|-------|
| Plate Voltage                                   | 180                | volts |
| Grid-No.2 (Screen-Grid) Voltage                 | See curve page 300 |       |
| Grid-No.2 Supply Voltage                        | 180                | volts |
| Grid-No.1 Voltage, Positive-bias value          | 0                  | volts |
| Plate Dissipation                               | 1.7                | watts |
| Grid-No.2 Input:                                |                    |       |
| For grid-No.2 voltages up to 90 volts           | 0.5                | watt  |
| For grid-No.2 voltages between 90 and 180 volts | See curve page 300 |       |
| Cathode Current                                 | 18                 | mA    |

**CHARACTERISTICS**

|   |      |      |            |
|---|------|------|------------|
| Plate Supply Voltage .....                              | 120  | 180  | volts      |
| Grid-No.2 Supply Voltage .....                          | 120  | 120  | volts      |
| Cathode-Bias Resistor .....                             | 180  | 180  | ohms       |
| Plate Resistance (Approx.) .....                        | 0.3  | 0.5  | megohm     |
| Transconductance .....                                  | 5000 | 5100 | $\mu$ mhos |
| Plate Current .....                                     | 7.5  | 7.7  | mA         |
| Grid-No.2 Current .....                                 | 2.5  | 2.4  | mA         |
| Grid-No.1 Voltage for plate current of 10 $\mu$ A ..... | -8.5 | -8.5 | volts      |

**6AK6**INDUSTRIAL  
TYPE**POWER AMPLIFIER PENTODE**

Miniature type for use as a power output pentode in compact equipment. Outlines section, 5C; requires miniature 7-contact socket.

**7BK**

|   |         |        |
|---|---------|--------|
| Heater Voltage (ac/dc) .....                  | 6.3     | volts  |
| Heater Current .....                          | 0.15    | ampere |
| Heater-Cathode Voltage .....                  | 100 max | volts  |
| Direct Interelectrode Capacitances (Approx.): |         |        |
| Grid to Plate .....                           | 0.12    | pF     |
| Input .....                                   | 3.6     | pF     |
| Output .....                                  | 4.2     | pF     |

**A-F Power Amplifier****MAXIMUM RATINGS (Design-Center Values)**

|                                   |      |       |
|-----------------------------------|------|-------|
| Plate Voltage .....               | 300  | volts |
| Screen Voltage (Grid No. 2) ..... | 250  | volts |
| Plate Dissipation .....           | 2.75 | watts |
| Screen Dissipation .....          | 0.75 | watt  |

**CHARACTERISTICS AND TYPICAL OPERATION**

|                                  |                                |            |
|----------------------------------|--------------------------------|------------|
| Plate Voltage .....              | 180                            | volts      |
| Suppressor (Grid No. 3) .....    | Connected to cathode at socket |            |
| Screen Voltage .....             | 180                            | volts      |
| Grid Voltage (Grid No. 1) .....  | -9                             | volts      |
| Peak A-F Grid Voltage .....      | 9                              | volts      |
| Zero-Signal Plate Current .....  | 15                             | mA         |
| Zero-Signal Screen Current ..... | 2.5                            | mA         |
| Plate Resistance .....           | 0.2                            | megohm     |
| Transconductance .....           | 2300                           | $\mu$ mhos |
| Load Resistance .....            | 10000                          | ohms       |
| Total Harmonic Distortion .....  | 10                             | %          |
| Max.-Sig. Power Output .....     | 1.1                            | watts      |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1 Circuit Resistance:    |     |        |
| For fixed-bias operation .....   | 0.1 | megohm |
| For cathode-bias operation ..... | 0.5 | megohm |

**6AK8/EABC80**

Refer to chart at end of section.

**6AK10**


Refer to chart at end of section.

**6AL3**

Refer to chart at end of section.

**6AL3/EY88****HALF-WAVE  
VACUUM RECTIFIER**

Miniature type used as damper tube in horizontal-deflection circuits of black-and-white television receivers. Outlines section, 7D; requires miniature 9-contact socket. Socket terminals 1, 2, 3, 6, 7, and 8 should not be used as tie points. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater: volts (ac/dc), 6.3; amperes, 1.55.

**9CB**



**Damper Service**


For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Center Values)**

|  |       |       |
|--|-------|-------|
| Peak Inverse Plate Voltage# (Absolute maximum) | 7500° | volts |
| Peak Plate Current                             | 550   | mA    |
| Average Plate Current                          | 220   | mA    |
| Plate Dissipation                              | 5     | watts |
| Peak Heater-Cathode Voltage                    | 6600  | volts |

° Under no circumstances should this absolute value be exceeded.

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).



**6BT**

**TWIN DIODE**

**6AL5**

3AL5, 12AL5

Miniature, high-perveance type used as detector in FM and television circuits, especially as a ratio detector in ac-operated FM receivers. Each diode section can be used independently of the other, or the two sections can be combined in parallel or full-wave arrangement. Resonant frequency of each unit is approximately 700 MHz. Outlines section, 5B; requires miniature 7-contact socket. Types 3AL5 and 12AL5 are identical with type 6AL5 except for heater ratings.

|   | 3AL5     | 6AL5     | 12AL5     |         |
|---|----------|----------|-----------|---------|
| Heater Voltage (ac/dc)                                  | 3.15     | 6.3      | 12.6      | volts   |
| Heater Current  | 0.6      | 0.3      | 0.15      | ampere  |
| Heater Warm-up Time (Average)                           | 11       | —        | —         | seconds |
| Peak Heater-Cathode Voltage                             | ±330 max | ±330 max | ±330 max  | volts   |
| <b>Direct Interelectrode Capacitances:</b>              |          |          |           |         |
| Plate No.1 to Cathode No.1, Heater, and Internal Shield | —        | —        | 2.5       | pF      |
| Plate No.2 to Cathode No.2, Heater, and Internal Shield | —        | —        | 2.5       | pF      |
| Cathode No.1 to Plate No.1, Heater, and Internal Shield | —        | —        | 3.4       | pF      |
| Cathode No.2 to Plate No.2, Heater, and Internal Shield | —        | —        | 3.4       | pF      |
| Plate No.1 to Plate No.2                                | —        | —        | 0.068 max | pF      |

**Half-Wave Rectifier**

**MAXIMUM RATINGS (Design-Center Values)**


|                                    |     |       |
|------------------------------------|-----|-------|
| Peak Inverse Plate Voltage         | 330 | volts |
| Peak Plate Current (Per Plate)     | 54  | mA    |
| Average Output Current (Per Plate) | 9   | mA    |

**TYPICAL OPERATION**

|   |     |       |
|---|-----|-------|
| AC Plate Voltage per Plate (rms)                      | 117 | volts |
| Min. Total Effective Plate-Supply Impedance per Plate | 300 | ohms  |
| Average Output Current per Plate                      | 9   | mA    |

Refer to chart at end of section.

**6AL7GT**



**12BU**

**BEAM POWER TUBE—  
SHARP-CUTOFF PENTODE**

**6AL11**

10AL11, 12AL11

Duodecar type used as FM detector and audio-frequency output amplifier in television receivers. Outlines section, 8C; requires duodecar 12-contact socket. Types 10AL11 and 12AL11 are identical with type 6AL11 except for heater ratings.

|                               | 6AL11    | 10AL11   | 12AL11   |         |
|-------------------------------|----------|----------|----------|---------|
| Heater Voltage (ac/dc)        | 6.3      | 9.8      | 12.6     | volts   |
| Heater Current                | 0.9      | 0.6      | 0.45     | ampere  |
| Heater Warm-up Time (Average) | —        | 11       | 11       | seconds |
| Heater-Cathode Voltage:       |          |          |          |         |
| Peak value                    | ±200 max | ±200 max | ±200 max | volts   |
| Average value                 | 100 max  | 100 max  | 100 max  | volts   |

## Direct Interelectrode Capacitance:

|   |       |    |
|---|-------|----|
| Beam Power Unit:  |       |    |
| Grid No.1 to Plate .....  | 0.26  | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield .....        | 11    | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield .....            | 12    | pF |
| Pentode Unit:   |       |    |
| Grid No.1 to Plate .....  | 0.034 | pF |
| Grid No.3 to Plate .....  | 3.2   | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield .....        | 6.5   | pF |
| Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2,<br>Plate, and Internal Shield ..... | 7.5   | pF |
| Grid No.1 to Grid No.3 .....  | 0.24  | pF |
| Pentode Plate to Beam Power Plate .....   | 0.12  | pF |

Beam Power Unit as Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|                                       |     |       |
|---------------------------------------|-----|-------|
| Plate Voltage .....                   | 275 | volts |
| Grid-No.2 (Screen-Grid) Voltage ..... | 275 | volts |
| Plate Dissipation .....               | 10  | watts |
| Grid-No.2 Input .....                 | 2   | watts |

## TYPICAL OPERATION

|  |      |            |
|--|------|------------|
| Plate Voltage .....                    | 250  | volts      |
| Grid-No.2 Voltage .....                | 250  | volts      |
| Grid-No.1 (Control-Grid) Voltage ..... | —8   | volts      |
| Peak AF Grid-No.1 Voltage .....        | 8    | volts      |
| Zero-Signal Plate Current .....        | 35   | mA         |
| Maximum-Signal Plate Current .....     | 39   | mA         |
| Zero-Signal Grid-No.2 Current .....    | 2.5  | mA         |
| Maximum-Signal Grid-No.2 Current ..... | 7    | mA         |
| Plate Resistance (Approx.) .....       | 0.1  | megohm     |
| Transconductance .....                 | 6500 | $\mu$ mhos |
| Load Resistance .....                  | 5000 | ohms       |
| Total Harmonic Distortion .....        | 10   | per cent   |
| Maximum-Signal Power Output .....      | 4.2  | watts      |

## MAXIMUM CIRCUIT VALUE

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 0.5  | megohm |

Pentode Unit as Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|   |      |            |
|---|------|------------|
| Plate Supply Voltage .....  | 150  | volts      |
| Grid-No.3 (Suppressor-Grid) Voltage .....                         | 0    | volts      |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                      | 100  | volts      |
| Cathode-Bias Resistor .....                                       | 560  | ohms       |
| Plate Resistance (Approx.) .....                                  | 0.15 | megohm     |
| Transconductance, Grid No.1 to Plate .....                        | 1000 | $\mu$ mhos |
| Transconductance, Grid No.3 to Plate .....                        | 400  | $\mu$ mhos |
| Plate Current .....   | 1.3  | mA         |
| Grid-No.2 Current .....   | 2.1  | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 30 $\mu$ A ..... | —4.5 | volts      |
| Grid-No.3 Voltage (Approx.) for plate current of 50 $\mu$ A ..... | —4.5 | volts      |

## Pentode Unit as FM Detector

## MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid-No.3 Voltage .....                                     | 28                 | volts |
| Grid-No.2 Supply Voltage .....                              | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 1.7                | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 1.1                | watts |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

6AM4


Refer to chart at end of section.

6AM6/EF91

Refer to chart at end of section.

Refer to chart at end of section.

6AM8



9CY

**DIODE—  
SHARP-CUTOFF PENTODE**

**6AM8A  
5AM8**

Miniature type used in television receiver applications. The pentode unit is used as an if amplifier, video amplifier, or agc amplifier. The high-perveance diode is used as an audio detector, video detector, or dc restorer. Outlines section, 6B; requires miniature 9-contact socket. Type 5AM8 is identical with type 6AM8A except for heater ratings.

|                               |             |              |        |
|-------------------------------|-------------|--------------|--------|
| Heater Voltage (ac/dc)        | 5AM8<br>4.7 | 6AM8A<br>6.3 | volts  |
| Heater Current                | 0.6         | 0.45         | ampere |
| Heater Warm-up Time (Average) | 100 max     | 100 max      | volts  |
| Heater-Cathode Voltage:       |             |              |        |
| Peak value                    | ±200 max    | ±200 max     | volts  |
| Average value                 | 100 max     | 100 max      | volts  |

**Direct Interelectrode Capacitances:**

|  |       |  |    |
|--|-------|--|----|
| <b>Diode Unit:</b>   |       |  |    |
| Plate to Cathode and Heater  | 1.8   |  | pF |
| Cathode to Plate and Heater  | 3     |  | pF |
| <b>Pentode Unit:</b>   |       |  |    |
| Grid No.1 to Plate   | 0.015 |  | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3 and Internal Shield | 6.5   |  | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield    | 2.6   |  | pF |
| Pentode Grid No.1 to Diode Plate                                       | 0.006 |  | pF |
| Pentode Plate to Diode Cathode   | 0.15  |  | pF |
| Pentode Plate to Diode Plate   | 0.1   |  | pF |

**Pentode Unit as Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage   | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value   | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | 330                | volts |
| Grid-No.2 Voltage                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0                  | volts |
| Plate Dissipation                                     | 3.2                | watts |
| Grid-No.2 Input:                                      |                    |       |
| For grid-No.2 voltages up to 165 volts                | 0.55               | watt  |
| For grid-No.2 voltages between 165 and 330 volts      | See curve page 300 |       |

**CHARACTERISTICS**

|  |                                |        |
|--|--------------------------------|--------|
| Plate Supply Voltage                                   | 125                            | volts  |
| Grid No.3  | Connected to cathode at socket |        |
| Grid-No.2 Supply Voltage                               | 125                            | volts  |
| Cathode-Bias Resistor                                  | 56                             | ohms   |
| Plate Resistance (Approx.)                             | 0.3                            | megohm |
| Transconductance                                       | 7800                           | μmhos  |
| Plate Current  | 12.5                           | mA     |
| Grid-No.2 Current                                      | 3.2                            | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA | -6                             | volts  |
| Grid-No.1 Voltage (Approx.) for plate current of 2 mA  | -3                             | volts  |


**MAXIMUM CIRCUIT VALUES**

|                                      |      |        |
|--------------------------------------|------|--------|
| <b>Grid-No.1-Circuit Resistance:</b> |      |        |
| For fixed-bias operation             | 0.25 | megohm |
| For cathode-bias operation           | 1    | megohm |

**Diode Unit**

**MAXIMUM RATING (Design-Maximum Value)**

|                       |   |    |
|-----------------------|---|----|
| Average Plate Current | 5 | mA |
|-----------------------|---|----|

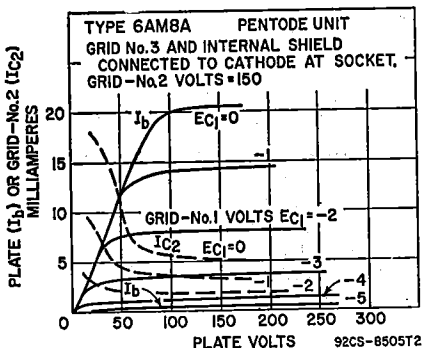

**6AN4**

Refer to chart at end of section.

**6AN5**

Refer to chart at end of section.

**6AN8**


Refer to chart at end of section.

## 6AN8A

5AN8

### MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color television receiver applications. The pentode unit is used as an intermediate-frequency amplifier, a video amplifier, an age amplifier, or a reactance tube. The triode unit is used in low-frequency oscillator, sync-separator, sync-clipper, and phase-splitter circuits. Outlines section, 6B; requires miniature 9-contact socket. Type 5AN8 is identical with 6AN8A except for heater ratings.



9DA

|   | 5AN8     | 6AN8A    | volts<br>ampere<br>seconds |
|---|----------|----------|----------------------------|
| Heater Voltage (ac/dc)  | 4.7      | 6.3      |                            |
| Heater Current  | 0.6      | 0.45     |                            |
| Heater Warm-up Time (Average)   | 11       | 11       |                            |
| Heater-Cathode Voltage:   |          |          |                            |
| Peak value  | ±200 max | ±200 max | volts                      |
| Average value   | 100 max  | 100 max  | volts                      |
| Direct Interelectrode Capacitances:                                     |          |          |                            |
| Triode Unit:  |          |          |                            |
| Grid to Plate   |          | 1.5      | pF                         |
| Grid to Cathode and Heater  |          | 2        | pF                         |
| Plate to Cathode and Heater   |          | 0.26     | pF                         |
| Pentode Unit:   |          |          |                            |
| Grid No.1 to Plate  |          | 0.04 max | pF                         |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield |          | 7        | pF                         |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     |          | 2.4      | pF                         |
| Triode Grid to Pentode Plate  |          | 0.02     | pF                         |
| Pentode Grid No.1 to Triode Plate                                       |          | 0.02     | pF                         |
| Pentode Plate to Triode Plate   |          | 0.15     | pF                         |

### Class A<sub>1</sub> Amplifier

|   | Triode Unit | Pentode Unit | volts<br>volts<br>volts<br>volts<br>watts |
|---|-------------|--------------|---|
| <b>MAXIMUM RATINGS</b> (Design-Maximum Values)        |             |              |   |
| Plate Voltage   | 330         | 330          | volts                                     |
| Grid-No.2 Supply Voltage                              | —           | 330          | volts                                     |
| Grid-No.2 (Screen-Grid) Voltage                       | See curve   | See curve    | page 800                                  |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0            | volts                                     |
| Plate Dissipation                                     | 2.8         | 2.3          | watts                                     |

Grid-No.2 Input:

|  |   |                    |      |
|--|---|--------------------|------|
| For grid-No.2 voltages up to 165 volts .....           | — | 0.55               | watt |
| For grid-No.2 voltages between 165 and 330 volts ..... | — | See curve page 300 |      |



CHARACTERISTICS

|   |      |        |       |
|---|------|--------|-------|
| Plate Supply Voltage .....                                    | 150  | 125    | volts |
| Grid-No.2 Supply Voltage .....                                | —    | 125    | volts |
| Grid-No.1 Voltage .....                                       | —3   | —      | volts |
| Cathode-Bias Resistor .....                                   | —    | 56     | ohms  |
| Amplification Factor .....                                    | 21   | —      |       |
| Plate Resistance (Approx.) .....                              | 4700 | 170000 | ohms  |
| Transconductance .....  | 4500 | 7800   | μmhos |
| Plate Current .....   | 15   | 12     | mA    |
| Grid-No.2 Current .....                                       | —    | 3.8    | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA .....  | —17  | —6     | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 1.6 mA ..... | —    | —3     | volts |

MAXIMUM CIRCUIT VALUES


|                                  |     |      |        |
|----------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance:*   |     |      |        |
| For fixed-bias operation .....   | 0.5 | 0.25 | megohm |
| For cathode-bias operation ..... | 1   | 1    | megohm |

\* If either unit is operating at maximum rated conditions, grid-No.1-circuit resistance for both units should not exceed the stated values.

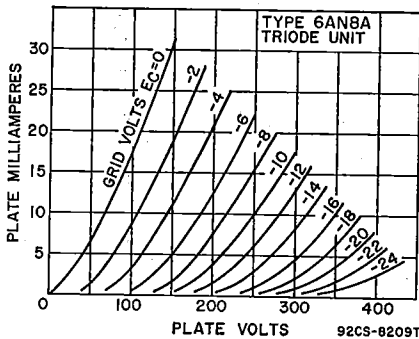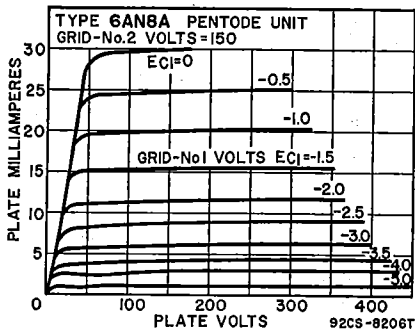

Refer to chart at end of section.

6AQ5



7BZ

BEAM POWER TUBE

6AQ5A

5AQ5, 12AQ5

Miniature type used as output amplifier primarily in automobile receivers and in ac-operated receivers and, triode-connected, as a vertical-deflection amplifier in television receivers. Outlines section, 5D; requires miniature 7-contact socket. Within its maximum ratings, the performance of this type is equivalent to that of larger types 6V6 and 6V6GTA. Types 5AQ5 and 12AQ5 are identical with type 6AQ5A except for heater ratings.

|  |          |          |          |         |
|--|----------|----------|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 5AQ5     | 6AQ5A    | 12AQ5    |         |
| Heater Current .....   | 4.7      | 6.3      | 12.6     | volts   |
| Heater Warm-up Time (Average) .....                          | 0.6      | 0.45     | 0.225    | ampere  |
| Heater-Cathode Voltage: .....                                | 11       | 11       | —        | seconds |
| Peak value .....   | ±200 max | ±200 max | ±200 max | volts   |
| Average value .....  | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):                |          |          |          |         |
| Grid No.1 to Plate .....                                     |          |          | 0.4      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |          |          | 8        | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |          |          | 8.5      | pF      |

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|                                     |     |       |
|-------------------------------------|-----|-------|
| Plate Voltage                       | 275 | volts |
| Grid-No.2 (Screen-Grid) Voltage     | 275 | volts |
| Plate Dissipation                   | 12  | watts |
| Grid-No.2 Input                     | 2   | watts |
| Bulb Temperature (At hottest point) | 250 | °C    |

## CHARACTERISTICS (Triode Connection)

|   |       |       |
|---|-------|-------|
| Plate Voltage   | 250   | volts |
| Grid-No.1 Voltage                                       | -12.5 | volts |
| Amplification Factor                                    | 9.5   |       |
| Plate Resistance (Approx.)                              | 1970  | ohms  |
| Transconductance  | 4800  | μmhos |
| Plate Current   | 49.5  | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 0.5 mA | -37   | volts |

## TYPICAL OPERATION

Same as for type 6V6GTA within the limitations of the maximum ratings.

## MAXIMUM CIRCUIT VALUES

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |

Vertical Deflection Amplifier (Triode Connection)<sup>o</sup>

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Maximum Values)



|  |      |       |
|--|------|-------|
| DC Plate Voltage                                     | 275  | volts |
| Peak Positive-Pulse Plate Voltage#                   | 1100 | volts |
| Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage | 275  | volts |
| Peak Cathode Current                                 | 115  | mA    |
| Average Cathode Current                              | 40   | mA    |
| Plate Dissipation                                    | 10   | watts |
| Bulb Temperature (At hottest point)                  | 250  | °C    |

## MAXIMUM CIRCUIT VALUE

|  |     |         |
|--|-----|---------|
| Grid-No.1-Circuit Resistance, for cathode-bias operation | 2.2 | megohms |
|--|-----|---------|

<sup>o</sup> Grid No.2 connected to plate.

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

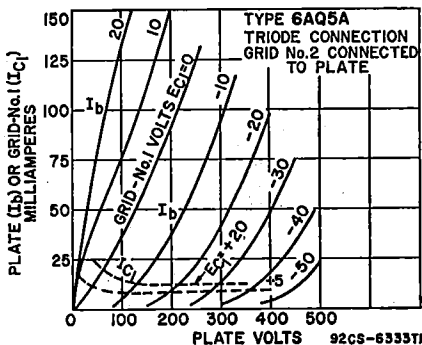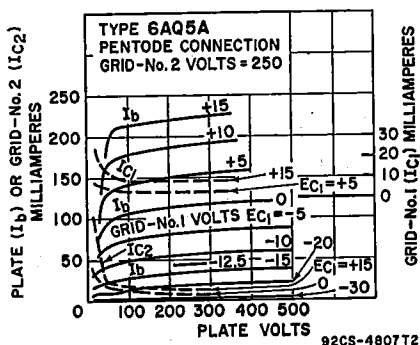

6AQ6


Refer to chart at end of section.

6AQ7GT

Refer to chart at end of section.

6AQ8

Refer to chart at end of section.



**HIGH-MU TWIN TRIODE**

**6AQ8/  
ECC85**

Miniature types used as rf amplifier and self-oscillating mixer in FM/AM radio receivers. Outlines section, 6B; requires miniature 9-contact socket.

|  |                  |                  |    |
|--|------------------|------------------|----|
| Heater Voltage (ac/dc) .....                     | 6.3              | volts            |    |
| Heater Current .....                             | 0.435            | ampere           |    |
| Peak Heater-Cathode Voltage .....                | ±90 max          | volts            |    |
| <b>Direct Interelectrode Capacitances:</b>       |                  |                  |    |
|  | <b>Unit No.1</b> | <b>Unit No.2</b> |    |
| Grid to Plate .....                              | 1.5              | 1.5              | pF |
| Cathode to Plate .....                           | 0.18             | 0.18             | pF |
| Grid to Cathode, Heater, and Internal Shield ..  | 3                | 3                | pF |
| Plate to Cathode, Heater, and Internal Shield .. | 1.2              | 1.2              | pF |
| Plate to Grid of Other Unit .....                | 0.008 max        | 0.008 max        | pF |
| Plate to Cathode of Other Unit .....             | 0.008 max        | 0.008 max        | pF |
| Grid to Cathode of Other Unit .....              | 0.003 max        | 0.003 max        | pF |
| Plate of Unit No.1 to Plate of Unit No.2 .....   |                  | 0.04 max         | pF |
| Grid of Unit No.1 to Grid of Unit No.2 .....     |                  | 0.003 max        | pF |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values, Each Unit)**

|   |     |       |
|---|-----|-------|
| Plate Supply Voltage .....                      | 550 | volts |
| Plate Voltage .....                             | 300 | volts |
| Grid Voltage, Negative-bias value .....         | 100 | volts |
| Cathode Current .....                           | 15  | mA    |
| Plate Dissipation:                              |     |       |
| For either plate .....                          | 2.5 | watts |
| For both plates with both units operating ..... | 4.5 | watts |

**CHARACTERISTICS**

|   |      |       |
|---|------|-------|
| Plate Voltage .....                     | 250  | volts |
| Grid Voltage, Negative-bias value ..... | 2.3  | volts |
| Plate Current .....                     | 10   | mA    |
| Transconductance .....                  | 5900 | μmhos |
| Amplification Factor .....              | 67   |       |

**TYPICAL OPERATION (Each Unit)**

|  | <b>RF<br/>Amplifier</b> | <b>Converter</b> |        |
|--|-------------------------|------------------|--------|
| Plate Supply Voltage .....                     | 250                     | 250              | volts  |
| Plate Voltage .....                            | 230                     | —                | volts  |
| Plate Resistor .....                           | 1800                    | 12000            | ohms   |
| Grid Resistor .....                            | —                       | 1                | megohm |
| Grid Voltage .....                             | —2                      | —                | volts  |
| RMS Oscillator Voltage .....                   | —                       | 3                | volts  |
| Cathode-Bias Resistor .....                    | 200                     | —                | ohms   |
| Plate Resistance (Approx.) .....               | 9700                    | 22000            | ohms   |
| Transconductance .....                         | 6000                    | —                | μmhos  |
| Conversion Transconductance .....              | —                       | 2300             | μmhos  |
| Input Resistance at frequency of 100 MHz ..... | 6000                    | 15000            | ohms   |
| Plate Current .....                            | 10                      | 5.2              | mA     |
| Equivalent Noise Resistance .....              | 500                     | —                | ohms   |

**MAXIMUM CIRCUIT VALUES (Each Unit)**

|   |       |        |
|---|-------|--------|
| Grid-Circuit Resistance .....               | 1     | megohm |
| Resistance between Cathode and Heater ..... | 20000 | ohms   |

Refer to chart at end of section.

**6AR5**

Refer to chart at end of section.


**6AR8**

**6AR11**

8AR11, 11AR11

**SEMIREMOTE-CUTOFF  
TWIN PENTODE**

Duodecar type used as if-amplifier tube in television receivers. Outlines section, 8A; requires duodecar 12-contact-socket. Types 8AR11 and 11AR11 are identical with type 6AR11 except for heater ratings.



12DM

|   | 6AR11    | 8AR11     | 11AR11    |         |
|---|----------|-----------|-----------|---------|
| Heater Voltage (ac/dc) .....  | 6.3      | 8.4       | 11.2      | volts   |
| Heater Current .....  | 0.8      | 0.6       | 0.45      | ampere  |
| Heater Warm-up Time (Average) .....   | —        | 11        | 11        | seconds |
| Heater-Cathode Voltage:   |          |           |           |         |
| Peak value .....  | ±200 max | ±200 max  | ±200 max  | volts   |
| Average value .....   | 100 max  | 100 max   | 100 max   | volts   |
| Direct Interelectrode Capacitances:   |          |           |           |         |
|   |          | Unit No.1 | Unit No.2 |         |
| Grid No.1 to Plate .....  |          | 0.026     | 0.026     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... |          | 10        | 10        | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     |          | 2.8       | 3         | pF      |
| Grid No.1 to Plate of Other Unit .....  |          | 0.002     | 0.002     | pF      |
| Plate of Unit No.1 to Plate of Unit No.2 .....                                |          |           | 0.02      | pF      |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values, Each Unit)**


|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value .....   | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 3.1                | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 0.65               | watt  |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

**CHARACTERISTICS (Each Unit)**

|  |                                |        |
|--|--------------------------------|--------|
| Plate Supply Voltage .....   | 125                            | volts  |
| Grid No.3 .....  | Connected to cathode at socket |        |
| Grid-No.2 Supply Voltage .....                                     | 125                            | volts  |
| Cathode-Bias Resistor .....  | 56                             | ohms   |
| Plate Resistance (Approx.) .....                                   | 0.2                            | megohm |
| Transconductance .....   | 10500                          | μmhos  |
| Plate Current .....  | 11                             | mA     |
| Grid-No.2 Current .....  | 3.5                            | mA     |
| Grid-No.1 Voltage (Approx.) for transconductance of 50 μmhos ..... | -15                            | volts  |

**6AS5****BEAM POWER TUBE**

Miniature type used as output amplifier primarily in automobile and in ac-operated receivers. Outlines section, 5D; requires miniature 7-contact socket. For curves of average plate characteristics, refer to type 35C5.



7CV

|  |          |        |
|--|----------|--------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | volts  |
| Heater Current .....   | 0.8      | ampere |
| Peak Heater-Cathode Voltage .....                            | ±100 max | volts  |
| Direct Interelectrode Capacitances (Approx.):                |          |        |
| Grid No.1 to Plate .....                                     | 0.6      | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 12       | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 9        | pF     |



**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                       | 150 | volts |
| Grid-No.2 (Screen-Grid) Voltage .....     | 117 | volts |
| Plate Dissipation .....                   | 5.5 | watts |
| Grid-No.2 Input .....                     | 1.0 | watt  |
| Bulb Temperature (At hottest point) ..... | 250 | °C    |

**TYPICAL OPERATION**

|  |      |          |
|--|------|----------|
| Plate Voltage .....                              | 150  | volts    |
| Grid-No.2 Voltage .....                          | 110  | volts    |
| Grid-No.1 (Control-Grid) Voltage .....           | -8.5 | volts    |
| Peak AF Grid-No.1 Voltage .....                  | 8.5  | volts    |
| Zero-Signal Plate Current .....                  | 35   | mA       |
| Maximum-Signal Plate Current .....               | 36   | mA       |
| Zero-Signal Grid-No.2 Current (Approx.) .....    | 2    | mA       |
| Maximum-Signal Grid-No.2 Current (Approx.) ..... | 6.5  | mA       |
| Transconductance .....                           | 5600 | μmhos    |
| Load Resistance .....                            | 4500 | ohms     |
| Total Harmonic Distortion .....                  | 10   | per cent |
| Maximum-Signal Power Output .....                | 2.2  | watts    |

**MAXIMUM CIRCUIT VALUES**


|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |        |
| For fixed-bias operation .....   | 0.1 | megohm |
| For cathode-bias operation ..... | 0.5 | megohm |

Refer to chart at end of section.

**6AS6**

**LOW-MU TWIN POWER TRIODE**

**6AS7G**  
INDUSTRIAL  
TYPE



**8BD**

Glass octal type used as a regulator tube in dc power supply units and in projection television booster scanning applications. Outlines section, 27B; requires octal socket. Refer to type 6080 for average plate characteristics curves.

|   |           |         |
|---|-----------|---------|
| Heater Voltage (ac/dc) .....                            | 6.3       | volts   |
| Heater Current .....                                    | 2.5       | amperes |
| Heater-Cathode Voltage:                                 |           |         |
| Peak values .....                                       | ±300 max. | volts   |
| Direct Interelectrode Capacitances (Approx.) each unit: |           |         |
| Grid to plate .....                                     | 10.5      | pF      |
| Grid to heater and cathode .....                        | 6.8       | pF      |
| Plate to heater and cathode .....                       | 2.3       | pF      |
| Heater to cathode .....                                 | 11.0      | pF      |
| Grid of unit No. 1 to grid of unit No. 2 .....          | 0.70      | pF      |
| Plate of unit No. 1 to plate of unit No. 2 .....        | 1.65      | pF      |

**Class A<sub>1</sub> Amplifier (Each Unit)**

**CHARACTERISTICS**

|                                  |      |       |
|----------------------------------|------|-------|
| Plate-Supply Voltage .....       | 135  | volts |
| Cathode-Bias Resistor .....      | 250  | ohms  |
| Amplification Factor .....       | 2    |       |
| Plate Resistance (Approx.) ..... | 280  | ohms  |
| Transconductance .....           | 7000 | μmhos |
| Plate Current .....              | 125  | mA    |

**DC Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Center Values)**

|                         |     |       |
|-------------------------|-----|-------|
| Plate Voltage .....     | 250 | volts |
| Plate Current .....     | 125 | mA    |
| Plate Dissipation ..... | 13  | watts |

■ Operation with fixed bias is not recommended.

**Booster Scanning Service (Each Unit)**

For operation in a 525-line, 30-frame system □

**MAXIMUM RATINGS (Design-Center Values)**

|   |      |       |
|---|------|-------|
| Peak Negative-Pulse Plate Voltage ..... | 1700 | volts |
| DC Plate Current .....                  | 125  | mA    |
| Plate Dissipation .....                 | 13   | watts |

## MAXIMUM CIRCUIT VALUES

|  |     |                 |
|--|-----|-----------------|
| Grid-Circuit Resistance:   |     |                 |
| For cathode-bias operation   | 1.0 | megohm          |
| For fixed-bias operation   |     | Not recommended |
| □ As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Communications Commission.  |     |                 |
| ● The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. |     |                 |


6A57GA

Refer to chart at end of section.

6A58

DIODE—  
SHARP-CUTOFF PENTODE

Miniature type used in television and radio receiver applications. The pentode unit is used as an if amplifier, video amplifier, or age amplifier. The high-perveance diode is used as an audio detector, video detector, or dc restorer. Outlines section, 6B; requires miniature 9-contact socket. For curve of average plate characteristics of pentode unit, see type 6AN8A.



|   |           |         |
|---|-----------|---------|
| Heater Voltage (ac/dc)  | 6.3       | volts   |
| Heater Current  | 0.45      | ampere  |
| Heater Warm-up Time (Average)   | —         | seconds |
| Heater-Cathode Voltage:   |           |         |
| Peak value  | ±200 max  | volts   |
| Average value   | 100 max   | volts   |
| Direct Interelectrode Capacitances:                                     |           |         |
| Diode Unit:   |           |         |
| Plate to Cathode, Heater, Pentode Grid No.3, and Internal Shield        | 3         | pF      |
| Pentode Unit:   |           |         |
| Grid No.1 to Plate  | 0.03      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 7         | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 2.4       | pF      |
| Pentode Grid No.1 to Diode Plate  | 0.005 max | pF      |
| Pentode Plate to Diode Cathode  | 0.15 max  | pF      |
| Pentode Plate to Diode Plate  | 0.10 max  | pF      |

Pentode Unit as Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Center Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage   | 300                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value   | 0                  | volts |
| Grid-No.2 Supply Voltage                              | 300                | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | See curve page 300 | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0                  | volts |
| Plate Dissipation                                     | 2.5                | watts |
| Grid-No.2 Input:                                      |                    |       |
| For grid-No.2 voltages up to 150 volts                | 0.5                | watt  |
| For grid-No.2 voltages between 150 and 300 volts      | See curve page 300 | volts |

## CHARACTERISTICS

|  |                                |       |
|--|--------------------------------|-------|
| Plate Supply Voltage                                   | 200                            | volts |
| Grid No.3  | Connected to cathode at socket | volts |
| Grid-No.2 Supply Voltage                               | 150                            | volts |
| Cathode-Bias Resistor                                  | 180                            | ohms  |
| Plate Resistance (Approx.)                             | 300000                         | ohms  |
| Transconductance                                       | 6200                           | μmhos |
| Plate Current  | 9.5                            | mA    |
| Grid-No.2 Current                                      | 3                              | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | —8                             | volts |

## MAXIMUM CIRCUIT VALUES

|                               |      |        |
|-------------------------------|------|--------|
| Grid-No.1-Circuit Resistance: |      |        |
| For fixed-bias operation      | 0.25 | megohm |
| For cathode-bias operation    | 1    | megohm |


Diode Unit

MAXIMUM RATINGS (Design-Center Values)

|                                  |     |       |
|----------------------------------|-----|-------|
| Peak Inverse Plate Voltage ..... | 330 | volts |
| Peak Plate Current .....         | 50  | mA    |
| Average Plate Current .....      | 5   | mA    |

Refer to chart at end of section.

6AS11



7BT

TWIN DIODE—  
HIGH-MU TRIODE

6AT6

12AT6

Miniature type used as a combined detector, amplifier, and avc tube in automobile and ac-operated radio receivers. Outlines section, 5C; requires miniature 7-contact socket. For typical operation as resistance-coupled amplifier refer to Resistance-Coupled Amplifier section. Type 12AT6 is identical with type 6AT6 except for heater ratings.

|   |         |          |        |
|---|---------|----------|--------|
| Heater Voltage (ac/dc) .....                  | 6AT6    | 12AT6    |        |
| Heater Current .....                          | 6.3     | 12.6     | volts  |
| Peak Heater-Cathode Voltage .....             | 0.3     | 0.15     | ampere |
| Direct Interelectrode Capacitances:           | ±90 max | ±90 max  | volts  |
| Triode Grid to Triode Plate .....             |         | 2        | pF     |
| Triode Grid to Cathode and Heater .....       |         | 2.2      | pF     |
| Triode Plate to Cathode and Heater .....      |         | 0.8      | pF     |
| Plate of Diode Unit No.2 to Triode Grid ..... |         | 0.04 max | pF     |

Triode Unit as Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Center Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 300 | volts |
| Plate Dissipation .....                 | 0.5 | watts |
| Grid Voltage, Positive-bias value ..... | 0   | volts |

CHARACTERISTICS

|                            |       |       |       |
|----------------------------|-------|-------|-------|
| Plate Voltage .....        | 100   | 250   | volts |
| Grid Voltage .....         | -1    | -3    | volts |
| Amplification Factor ..... | 70    | 70    |       |
| Plate Resistance .....     | 54000 | 58000 | ohms  |
| Transconductance .....     | 1300  | 1200  | μmhos |
| Plate Current .....        | 0.8   | 1     | mA    |

Diode Units


MAXIMUM RATING (Design-Center Value)

|                                 |   |    |
|---------------------------------|---|----|
| Plate Current (Each Unit) ..... | 1 | mA |
|---------------------------------|---|----|

The two diode plates are placed around a cathode whose sleeve is common to the triode unit. Each diode plate has its own base pin. For diode operation curves, refer to type 6AV6.

Refer to chart at end of section.

6AT8



9DW

MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE

6AT8A

5AT8

Miniature types used as combined oscillator and mixer tubes in television receivers utilizing an intermediate frequency in the order of 40 MHz. Outlines section, 6B; requires miniature 9-contact socket. Except for interelectrode capacitances and basing arrangement, this type is identical with miniature type 6X8. The basing arrangement is particularly suitable for connection to the coils of certain designs of turret tuners. Type 5AT8 is identical with type 6AT8A except for heater ratings.

|   | 5AT8       | 6AT8A     |         |
|---|------------|-----------|---------|
| Heater Voltage (ac/dc) .....                                | 4.7        | 6.3       | volts   |
| Heater Current .....  | 0.6        | 0.45      | ampere  |
| Heater Warm-up Time (Average) .....                         | 11         | 11        | seconds |
| Direct Interelectrode Capacitances:                         |            |           |         |
| Triode Unit:  | Unshielded | Shielded* |         |
| Grid to Plate .....   | 1.5        | 1.5       | pF      |
| Grid to Cathode and Heater .....                            | 2          | 2.4       | pF      |
| Plate to Cathode and Heater .....                           | 0.5        | 1         | pF      |
| Pentode Unit:   |            |           |         |
| Grid No.1 to Plate .....                                    | 0.06 max   | 0.03 max  | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2 and Grid No.3 ..... | 4.6        | 4.8       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....    | 0.9        | 1.6       | pF      |
| Pentode Grid No.1 to Triode Plate .....                     | 0.05 max   | 0.04 max  | pF      |
| Pentode Plate to Triode Plate .....                         | 0.05 max   | 0.008 max | pF      |
| Heater to Cathode .....                                     | 6          | 6†        | pF      |


\* With external shield connected to cathode except as noted.  
† With external shield connected to plate.

**6AU4GT**

Refer to chart at end of section.

**6AU4GTA HALF-WAVE VACUUM RECTIFIER**

Glass octal type used as damper tube in horizontal-deflection circuits of color and wide-angle picture-tube television receivers. Outlines section, 13G; requires octal socket. Type may be supplied with pin No. 1 omitted. Socket terminals 1, 2, 4, and 6 should not be used as tie points. This tube, like other power-handling tubes, should be adequately ventilated.



|   |      |         |
|---|------|---------|
| Heater Voltage (ac/dc) .....                  | 6.3  | volts   |
| Heater Current .....                          | 1.8  | amperes |
| Direct Interelectrode Capacitances (Approx.): |      |         |
| Plate to Heater and Cathode .....             | 8.5  | pF      |
| Cathode to Heater and Plate .....             | 11.5 | pF      |
| Heater to Cathode .....                       | 4    | pF      |

**Damper Service**

For operation in a 525-line, 30-frame system


**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |      |       |       |
|-----------------------------------|------|-------|-------|
| Peak Inverse Plate Voltage# ..... | 4500 | volts |       |
| Peak Plate Current .....          | 1300 | mA    |       |
| Average Plate Current .....       | 210  | mA    |       |
| Plate Dissipation .....           | 6.5  | watts |       |
| Heater-Cathode-Voltage:           |      |       |       |
| Peak value .....                  | +300 | -4500 | volts |
| Average value .....               | +100 | -900  | volts |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

**6AU5GT BEAM POWER TUBE**

Glass octal type used as horizontal-deflection amplifier in low-cost, high-efficiency deflection circuits of television receivers. Outlines section, 13D; requires octal socket.



|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | volts   |
| Heater Current .....   | 1.25     | amperes |
| Heater-Cathode Voltage:                                      |          |         |
| Peak value .....   | ±200 max | volts   |
| Average value .....  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):                |          |         |
| Grid No.1 to Plate .....                                     | 0.5      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 11.3     | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 7        | pF      |

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                        | Pentode Connection | Triode† Connection |       |
|--|--------------------|--------------------|-------|
| Plate Voltage .....                    | 115                | 110                | volts |
| Grid-No.2 (Screen-Grid) Voltage .....  | 175                | 100                | volts |
| Grid-No.1 (Control-Grid) Voltage ..... | -20                | -4.5               | volts |
| Plate Resistance .....                 | 6000               | —                  | ohms  |
| Transconductance .....                 | 5600               | —                  | μmhos |
| Plate Current .....                    | 60                 | —                  | mA    |
| Grid No.2 Current .....                | 6.8                | —                  | mA    |

† Grid No.2 connected to plate.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Center Values)**

|   |       |       |
|---|-------|-------|
| DC Plate Voltage .....                                      | 550   | volts |
| Peak Positive-Pulse Plate Voltage# (Absolute Maximum) ..... | 5500° | volts |
| Peak Negative-Pulse Plate Voltage .....                     | 1250  | volts |
| DC Grid-No.2 (Screen-Grid) Voltage .....                    | 200   | volts |
| Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage .....  | 300   | volts |
| Peak Cathode Current .....                                  | 400   | mA    |
| Average Cathode Current .....                               | 110   | mA    |
| Grid-No.2 Input .....                                       | 2.5   | watts |
| Plate Dissipation†† .....                                   | 10    | watts |
| Bulb Temperature (At hottest point) .....                   | 210   | °C    |

**MAXIMUM CIRCUIT VALUE**

- Grid-No.1-Circuit Resistance .....
- # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).
- ° Under no circumstances should this absolute value be exceeded.
- \* Obtained through a series dropping resistor of sufficient magnitude to limit the grid-No.2 input to the rated maximum value.
- †† A bias resistor or other means is required to protect the tube in absence of excitation.

Refer to chart at end of section.


**6AU6**

**6AU6A**

**SHARP-CUTOFF PENTODE** 3AU6, 4AU6, 12AU6

Miniature type used in compact radio equipment as rf amplifier especially in high-frequency, wide-band applications; also used as limiter tube in FM equipment. Outlines section, 5C; requires miniature 7-contact socket. For a discussion of limiters, refer to Electron Tube Applications section. For typical operation as

resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section. Types 3AU6, 4AU6, and 12AU6 are identical with type 6AU6A except for heater ratings.



7BK

|                                     | 3AU6     | 4AU6     | 6AU6     | 12AU6    |         |
|-------------------------------------|----------|----------|----------|----------|---------|
| Heater Voltage (ac/dc) .....        | 3.15     | 4.2      | 6.3      | 12.6     | volts   |
| Heater Current .....                | 0.6      | 0.45     | 0.3      | 0.15     | ampere  |
| Heater Warm-up Time (Average) ..... | 11       | 11       | 11       | —        | seconds |
| Heater-Cathode Voltage:             |          |          |          |          |         |
| Peak value .....                    | ±200 max | ±200 max | ±200 max | ±200 max | volts   |
| Average value .....                 | 100 max  | 100 max  | 100 max  | 100 max  | volts   |

## Direct Interelectrode Capacitances:

| Pentode Connection:   |            |    |
|---|------------|----|
| Grid No.1 to Plate  | 0.0035 max | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 5.5        | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 5          | pF |
| Triode Connection†:   |            |    |
| Grid No.1 to Plate, Grid No.2, Grid No.3, and Internal Shield           | 2.6        | pF |
| Grid No.1 to Cathode and Heater   | 3.2        | pF |
| Plate, Grid No.2, Grid No.3, and Internal Shield to Cathode and Heater  | 1.2*       | pF |

† Grid No.2, grid No.3, and internal shield connected to plate.

\* Value is 8.5 pF with external shield connected to cathode.

Class A<sub>1</sub> Amplifier


## MAXIMUM RATINGS (Design-Maximum Values)

|   | Triode† Connection | Pentode Connection |       |
|---|--------------------|--------------------|-------|
| Plate Voltage   | 275                | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value   | —                  | 0                  | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | See curve page 300 | 330                | volts |
| Grid-No.2 Supply Voltage                              | —                  | 0                  | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0                  | 0                  | watts |
| Plate Dissipation                                     | 3.5                | 3.5                | watts |
| Grid-No.2 Input:                                      |                    |                    |       |
| For grid-No.2 voltages up to 165 volts                | —                  | 0.75               | watt  |
| For grid-No.2 voltages between 165 and 330 volts      | See curve page 300 |                    |       |

## CHARACTERISTICS

|  | Triode† Connection | Pentode Connection |         |           |         |
|--|--------------------|--------------------|---------|-----------|---------|
| Plate Supply Voltage                         | 250                | 100                | 250     | 150       | volts   |
| Grid No.3                                    | —                  | Connected to       | cathode | at socket |         |
| Grid-No.2 Supply Voltage                     | —                  | 100                | 125     | 150       | volts   |
| Cathode-Bias Resistor                        | 330                | 150                | 100     | 68        | ohms    |
| Amplification Factor                         | 36                 | —                  | —       | —         |         |
| Plate Resistance (Approx.)                   | —                  | 0.5                | 1.5     | 1         | megohms |
| Transconductance                             | 4800               | 3900               | 4500    | 5200      | μmhos   |
| Plate Current                                | 12.2               | 5                  | 7.6     | 10.6      | mA      |
| Grid-No.2 Current                            | —                  | 2.1                | 3       | 4.3       | mA      |
| Grid-No.1 Voltage for plate current of 10 μA | —                  | -4.2               | -5.5    | -6.5      | volts   |

† Grid No.2, grid No.3, and internal shield connected to plate.

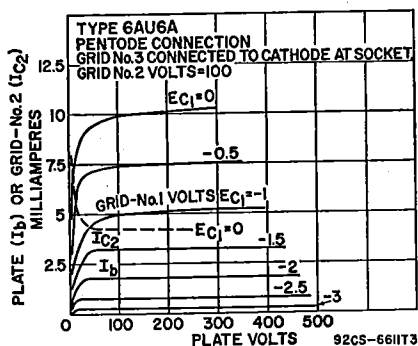


6AU7

Refer to chart at end of section.

6AU8

Refer to chart at end of section.



**9DX**

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE 6AU8A**

Miniature type used in television receiver applications. Pentode unit is used as video amplifier, if amplifier, and agc amplifier. Triode unit is used in sync-amplifier, sync-separator, sync-clipper, and phase-inverter circuits. Outlines section, 6E; requires 9-contact socket.

|   |           |         |
|---|-----------|---------|
| Heater Voltage (ac/dc)  | 6.3       | volts   |
| Heater Current  | 0.6       | ampere  |
| Heater Warm-up Time (Average)   | 11        | seconds |
| Heater-Cathode Voltage:   |           |         |
| Peak value  | ±200 max  | volts   |
| Average value   | 100 max   | volts   |
| Direct Interelectrode Capacitances:                                     |           |         |
| Triode Unit:  |           |         |
| Grid to Plate   | 2.2       | pF      |
| Grid to Cathode and Heater  | 2.6       | pF      |
| Plate to Cathode and Heater   | 0.34      | pF      |
| Pentode Unit:   |           |         |
| Grid No.1 to Plate  | 0.06      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 7.5       | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 3.4       | pF      |
| Triode Grid to Pentode Plate  | 0.022 max | pF      |
| Pentode Grid No.1 to Triode Plate                                       | 0.006 max | pF      |
| Pentode Plate to Triode Plate   | 0.12 max  | pF      |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**


|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage   | 330         | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —           | 330                | volts |
| Grid-No.2 Voltage                                     |             | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0                  | volts |
| Plate Dissipation                                     | 2.8         | 3.3                | watts |
| Grid-No.2 Input:                                      |             |                    |       |
| For grid-No.2 voltages up to 165 volts                | —           | 1                  | watt  |
| For grid-No.2 voltages between 165 and 330 volts      |             | See curve page 300 |       |

**CHARACTERISTICS**

|   |      |        |       |
|---|------|--------|-------|
| Plate Supply Voltage                                    | 150  | 200    | volts |
| Grid-No.2 Supply Voltage                                | —    | 125    | volts |
| Cathode-Bias Resistor                                   | 150  | 82     | ohms  |
| Amplification Factor                                    | 43   | —      |       |
| Plate Resistance (Approx.)                              | 8100 | 100000 | ohms  |
| Transconductance  | 5300 | 8000   | μmhos |
| Plate Current   | 9.5  | 17     | mA    |
| Grid-No.2 Current                                       | —    | 3.4    | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | —6.5 | —7.5   | volts |

**MAXIMUM CIRCUIT VALUES**

|                               |     |      |        |
|-------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance: |     |      |        |
| For fixed-bias operation      | 0.5 | 0.25 | megohm |
| For cathode-bias operation    | 1   | 1    | megohm |



**6CK**

**BEAM POWER TUBE 6AV5GA**

12AV5GA, 25AV5GA

Glass octal type used as horizontal-deflection amplifier in television receivers. Outlines section, 19C; requires octal socket. Types 12AV5GA and 25AV5GA are identical with type 6AV5GA except for heater ratings.

|                               | 6AV5GA | 12AV5GA | 25AV5GA |         |
|-------------------------------|--------|---------|---------|---------|
| Heater Voltage (ac/dc)        | 6.3    | 12.6    | 25      | volts   |
| Heater Current                | 1.2    | 0.6     | 0.3     | ampers  |
| Heater Warm-up Time (Average) | —      | 11      | —       | seconds |

|  |          |          |          |       |
|--|----------|----------|----------|-------|
| Heater-Cathode Voltage:                                |          |          |          |       |
| Peak value   | ±200 max | ±200 max | ±200 max | volts |
| Average value  | 100 max  | 100 max  | 100 max  | volts |
| Direct Interelectrode Capacitances (Approx.)           |          |          |          |       |
| Grid No.1 to Plate                                     |          |          | 0.5      | pF    |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 |          |          | 14       | pF    |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     |          |          | 7        | pF    |

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                                       | Pentode Connection |       | Triode* Connection |       |
|---|--------------------|-------|--------------------|-------|
|   | Plate Voltage      | 60    | 250                |       |
| Grid-No.2 (Screen-Grid) Voltage                       | 150                | 150   | 150                | volts |
| Grid-No.1 (Control-Grid) Voltage                      | 0                  | -22.5 | -22.5              | volts |
| Plate Resistance                                      | —                  | 14500 | —                  | ohms  |
| Transconductance                                      | —                  | 5900  | —                  | μmhos |
| Plate Current   | 260                | 57    | —                  | mA    |
| Screen Current  | 26                 | 2.1   | —                  | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | —                  | -43   | —                  | volts |
| Amplification Factor                                  | —                  | —     | 4.3                |       |

\* Grid No.2 connected to plate.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Center Values)**

|   |       |       |
|---|-------|-------|
| DC Plate Voltage                                      | 550   | volts |
| Peak Positive-Pulse Plate Voltage# (Absolute Maximum) | 5500* | volts |
| Peak Negative-Pulse Plate Voltage                     | 1250  | volts |
| DC Grid-No.2 Voltage                                  | 175   | volts |
| Peak Negative-Pulse Grid-No.1 Voltage                 | 300   | volts |
| Peak Cathode Current                                  | 400   | mA    |
| Average Cathode Current                               | 110   | mA    |
| Grid-No.2 Input                                       | 2.5   | watts |
| Plate Dissipation††                                   | 11    | watts |
| Bulb Temperature (At hottest point)                   | 210   | °C    |

**MAXIMUM CIRCUIT VALUE**

|                              |      |        |
|------------------------------|------|--------|
| Grid-No.1-Circuit Resistance | 0.47 | megohm |
|------------------------------|------|--------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* Under no circumstances should this absolute value be exceeded.

†† A bias resistor or other means is required to protect the tube in absence of excitation.

**6AV5GT**


Refer to chart at end of section.

**6AV6**

4AV6, 12AV6

**TWIN DIODE—  
HIGH-MU TRIODE**

Miniature type used as combined detector, amplifier, and avc tube in automobile and ac-operated radio receivers. The 6AV6 may be substituted directly for the 6AT6 in applications where the higher amplification of the 6AV6 is advantageous. Outlines section, 5C; requires miniature 7-contact socket. Types 4AV6, and 12AV6 are identical with type 6AV6 except for heater ratings.



7BT

|   | 4AV6     | 6AV6     | 12AV6    |         |
|---|----------|----------|----------|---------|
| Heater Voltage (ac/dc)                  | 4.2      | 6.3      | 12.6     | volts   |
| Heater Current                          | 0.45     | 0.3      | 0.15     | ampere  |
| Heater Warm-up Time (Average)           | 11       | —        | —        | seconds |
| Heater-Cathode Voltage:                 |          |          |          |         |
| Peak value                              | ±200 max | ±200 max | ±200 max | volts   |
| Average value                           | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:     |          |          |          |         |
| Triode Grid to Triode Plate             |          |          | 2        | pF      |
| Triode Grid to Cathode and Heater       |          |          | 2.2      | pF      |
| Triode Plate to Cathode and Heater      |          |          | 0.8*     | pF      |
| Plate of Diode Unit No.2 to Triode Grid |          |          | 0.04 max | pF      |


\* This value is 1.2 pF with external shield connected to cathode.




Triode Unit as Class A<sub>1</sub> Amplifier

MAXIMUM RATING (Design-Maximum Value)

|   |      |       |
|---|------|-------|
| Plate Voltage .....                     | 330  | volts |
| Grid Voltage, Positive-bias value ..... | 0    | volts |
| Plate Dissipation .....                 | 0.55 | watt  |

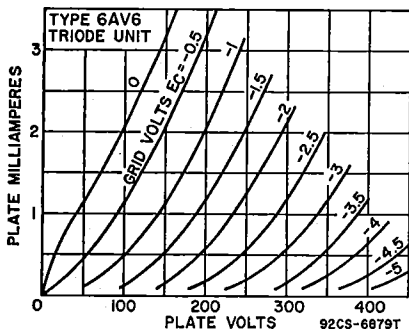

AVERAGE DIODE CHARACTERISTICS  
HALF-WAVE RECTIFICATION-SINGLE DIODE UNIT

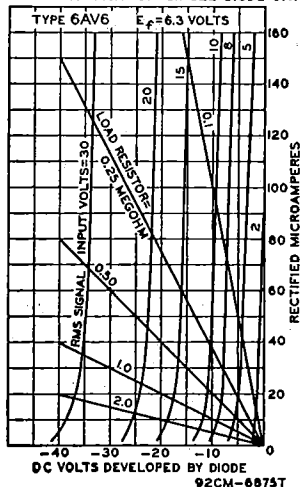

CHARACTERISTICS

|                            |       |       |            |
|----------------------------|-------|-------|------------|
| Plate Voltage .....        | 100   | 250   | volts      |
| Grid Voltage .....         | -1    | -2    | volts      |
| Amplification Factor ..... | 100   | 100   |            |
| Plate Resistance .....     | 80000 | 62500 | ohms       |
| Transconductance .....     | 1250  | 1600  | $\mu$ mhos |
| Plate Current .....        | 0.50  | 1.2   | mA         |

Diode Units

MAXIMUM RATING (Design-Maximum Value)

|                                 |   |    |
|---------------------------------|---|----|
| Plate Current (Each Unit) ..... | 1 | mA |
|---------------------------------|---|----|

The two diode plates are placed around a cathode, the sleeve of which is common to the triode unit. Each diode plate has its own base pin. Diode biasing of the triode unit is not recommended.

Installation and Application

The triode unit of the 6AV6 is recommended for use only in resistance-coupled circuits. Refer to the Resistance-Coupled Amplifier section for typical operating conditions. Grid bias for the triode unit of the 6AV6 may be obtained from a fixed source, such as a fixed-voltage tap on the dc power supply, or from a cathode-bias resistor. It should not be obtained by the diode-biasing method because of the probability of plate-current cutoff, even with relatively small signal voltages applied to the diode circuit.

Refer to chart at end of section.

6AV11

Refer to chart at end of section.


6AW8

# 6AW8A

8AW8A

## HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in television receiver applications. The pentode unit is used as an if amplifier, video amplifier, age amplifier, or reactance tube. The triode unit is used in low-frequency oscillator, sync-separator, sync-clipper, and phase-splitter circuits. Outlines section, 6E; requires miniature 9-contact socket. Type 8AW8A is identical with type 6AW8A except for heater ratings.



|   | 6AW8A     | 8AW8A     |         |
|---|-----------|-----------|---------|
| Heater Voltage (ac/dc)  | 6.3       | 8.4       | volts   |
| Heater Current  | 0.6       | 0.45      | ampere  |
| Heater Warm-up Time (Average)   | 11        | 11        | seconds |
| <b>Heater-Cathode Voltage:</b>  |           |           |         |
| Peak value  | ±200 max  | ±200 max  | volts   |
| Average value   | 100 max   | 100 max   | volts   |
| <b>Direct Interelectrode Capacitances:</b>  |           |           |         |
| <b>Triode Unit:</b>   |           |           |         |
| Grid to Plate   | 2.2       | 2.2       | pF      |
| Grid to Cathode, Pentode Cathode, Pentode Grid No.3, Internal Shield, and Heater  | 3.2       | 3.4       | pF      |
| Plate to Cathode, Pentode Cathode, Pentode Grid No.3, Internal Shield, and Heater | 1.8       | 3         | pF      |
| <b>Pentode Unit:</b>  |           |           |         |
| Grid No.1 to Plate  | 0.06 max  | 0.05 max  | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield           | 10        | 10        | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield               | 3.6       | 4.5       | pF      |
| Pentode Grid No.1 to Triode Plate   | 0.008 max | 0.005 max | pF      |
| Pentode Plate to Triode Plate   | 0.15 max  | 0.025 max | pF      |

■ With external shield connected to pins 4 and 5.



### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage   | 330         | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —           | 330                | volts |
| Grid-No.2 Voltage                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, positive-bias value | 0           | 0                  | volts |
| Plate Dissipation                                     | 1.1         | 3.75               | watts |
| Grid-No.2 Input:                                      |             |                    |       |
| For grid-No.2 voltages up to 165 volts                | —           | 1.1                | watts |
| For grid-No.2 voltages between 165 and 330 volts      | —           | See curve page 300 |       |

#### CHARACTERISTICS


|                          | 200 | 150 | volts |
|--------------------------|-----|-----|-------|
| Plate Supply Voltage     | —   | 160 | volts |
| Grid-No.2 Supply Voltage | —2  | —   | volts |
| Grid-No.1 Voltage        | —   | 150 | ohms  |
| Cathode-Bias Resistor    | 70  | —   |       |
| Amplification Factor     |     |     |       |

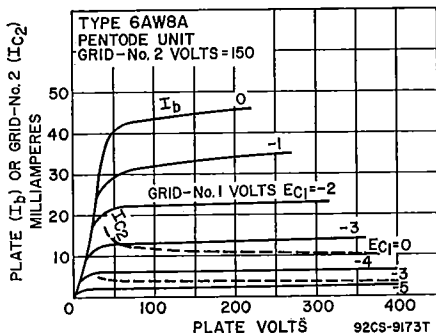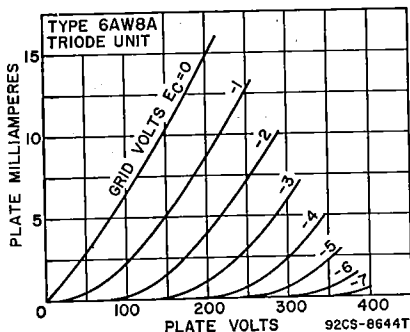

|  |      |      |        |
|--|------|------|--------|
| Plate Resistance (Approx.)                             | —    | 0.2  | megohm |
| Transconductance                                       | 4000 | 9500 | μmhos  |
| Plate Current  | 4    | 15   | mA     |
| Grid-No.2 Current                                      | —    | 3.5  | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA | —5   | —8   | volts  |

**MAXIMUM CIRCUIT VALUES**

|                               |     |      |        |
|-------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance: |     |      |        |
| For fixed-bias operation      | 0.5 | 0.25 | megohm |
| For cathode-bias operation    | 1   | 1    | megohm |



12BL

**HALF-WAVE VACUUM RECTIFIER**

**6AX3**

12AX3, 17AX3

Duodecar type used as damper tube in horizontal-deflection circuits of television receivers. Outlines section, 8C; requires 12-contact socket. Socket terminals 5, 6, 8, and 9 should not be used as tie points. This tube, like other power-handling tubes, should be adequately ventilated. Types 12AX3 and 17AX3 are identical with type 6AX3 except for heater ratings.

|                                     |      |       |       |         |
|-------------------------------------|------|-------|-------|---------|
| Heater Voltage (ac/dc)              | 6AX3 | 12AX3 | 17AX3 |         |
| Heater Current                      | 6.3  | 12.6  | 16.8  | volts   |
| Heater Warm-up Time (Average)       | 1.2  | 0.6   | 0.45  | amperes |
| Direct Interelectrode Capacitances: | —    | 11    | 11    | seconds |
| Plate to Cathode and Heater         |      |       | 5.5   | pF      |
| Cathode to Plate and Heater         |      |       | 7.5   | pF      |
| Heater to Cathode                   |      |       | 2.8   | pF      |

**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**


|                             |      |       |       |
|-----------------------------|------|-------|-------|
| Peak Inverse Plate Voltage# | 5000 | volts |       |
| Peak Plate Current          | 1000 | mA    |       |
| Average Plate Current       | 165  | mA    |       |
| Plate Dissipation           | 5.3  | watts |       |
| Heater-Cathode Voltage:     |      |       |       |
| Peak value                  | +300 | —5000 | volts |
| Average value               | +100 | —900  | volts |

**CHARACTERISTIC**

|  |    |       |
|--|----|-------|
| Tube Voltage Drop for plate current of 250 mA  | 32 | volts |
| # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds). |    |       |

Refer to chart at end of section.

**6AX4GT**



4CG

**HALF-WAVE VACUUM RECTIFIER**

**6AX4GTB**

12AX4GTB, 17AX4GTA

Glass octal type used as damper tube in horizontal-deflection circuits of color and black-and-white television receivers. Outlines section, 13D; requires octal socket. May be supplied with pin No. 1 omitted. Socket terminals 1, 2, 4, and 6 should not be used as tie points. This tube, like other power-handling tubes, should be adequately ventilated. Types 12AX4GTB and 17AX4GTA are identical with type 6AX4GTB except for heater ratings.

|   |          |           |           |         |
|---|----------|-----------|-----------|---------|
| Heater Voltage (ac/dc)                        | 6AX4-GTB | 12AX4-GTB | 17AX4-GTA |         |
| Heater Current                                | 6.3      | 12.6      | 16.8      | volts   |
| Heater Warm-up Time (Average)                 | 1.2      | 0.6       | 0.45      | amperes |
| Direct Interelectrode Capacitances (Approx.): | —        | 11        | 11        | seconds |
| Cathode to Plate and Heater                   |          |           | 8.5       | pF      |
| Plate to Cathode and Heater                   |          |           | 5         | pF      |
| Heater to Cathode                             |          |           | 4         | pF      |

### Damper Service

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                             |      |       |
|-----------------------------|------|-------|
| Peak Inverse Plate Voltage# | 5000 | volts |
| Peak Plate Current          | 1000 | mA    |
| Average Plate Current       | 165  | mA    |
| Plate Dissipation           | 5.3  | watts |
| Heater-Cathode Voltage:     |      |       |
| Peak value                  | +300 | -5000 |
| Average value               | +100 | -900  |
|                             |      | volts |


#### CHARACTERISTIC, Instantaneous Value

|  |    |       |
|--|----|-------|
| Tube Voltage Drop for plate current of 250 mA  | 32 | volts |
| # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds). |    |       |

## 6AX5GT

### FULL-WAVE VACUUM RECTIFIER

Glass octal type used in power supplies of radio equipment having moderate dc requirements. Outlines section, 13D; requires octal socket. This type may be supplied with pin No. 1 omitted. This tube, like other power-handling tubes, should be adequately ventilated. Heater: volts (ac), 6.3; amperes, 1.2.



#### Full-Wave Rectifier

#### MAXIMUM RATINGS (Design-Center Values)

|  |                  |         |
|--|------------------|---------|
| Peak Inverse Plate Voltage               | 1250             | volts   |
| Peak Plate Current (Per Plate)           | 375              | mA      |
| Hot-Switching Transient Plate Current:   |                  |         |
| For duration of 0.2 second maximum       | 2.6              | amperes |
| AC Plate Supply Voltage (Per Plate, rms) | See Rating Chart |         |
| Average Output Current (Per Plate, rms)  | See Rating Chart |         |
| Peak Heater-Cathode Voltage              | ±450             | volts   |


#### TYPICAL OPERATION WITH CAPACITOR INPUT TO FILTER

|   |         |     |         |
|---|---------|-----|---------|
| AC Plate-to-Plate Supply Voltage (rms)          | 700     | 900 | volts   |
| Filter Input Capacitor*                         | 10      | 10  | $\mu$ F |
| Effective Plate-Supply Impedance Per Plate      | 50      | 105 | ohms    |
| DC Output Voltage at Input to Filter (Approx.): |         |     |         |
| At half-load current of                         | 62.5 mA | —   | volts   |
|   | 40 mA   | 540 | volts   |
| At full-load current of                         | 125 mA  | 350 | volts   |
|   | 80 mA   | 490 | volts   |
| Voltage Regulation (Approx.):                   |         |     |         |
| Half-load to full-load current                  | 45      | 50  | volts   |

#### TYPICAL OPERATION WITH CHOKE INPUT TO FILTER

|   |         |      |         |
|---|---------|------|---------|
| AC Plate-to-Plate Supply Voltage (rms)          | 700     | 900  | volts   |
| Filter Input Choke                              | 10#     | 10## | henries |
| DC Output Voltage at Input to Filter (Approx.): |         |      |         |
| At half-load current of                         | 75 mA   | 270  | volts   |
|   | 62.5 mA | —    | volts   |
| At full-load current of                         | 150 mA  | 250  | volts   |
|   | 125 mA  | 350  | volts   |

RATING CHART

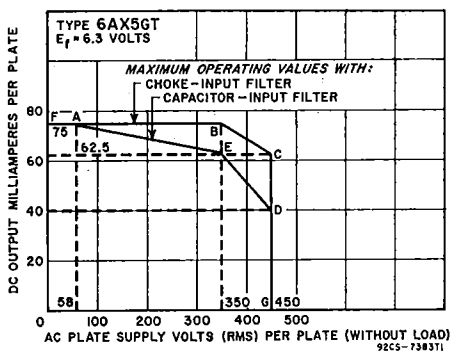

Voltage Regulation (Approx.):

Half-load to full-load current ..... 20 15 volts

\* Higher values of capacitance than indicated may be used but the effective plate-supply impedance may have to be increased to prevent exceeding the maximum rating for hot-switching transient plate current.

# This value is adequate to maintain optimum regulation provided the load current is not less than 30 mA. For load currents less than 30 mA, a larger value of inductance is required for optimum regulation.


## This value is adequate to maintain optimum regulation provided the load current is not less than 35 mA. For load currents less than 35 mA, a larger value of inductance is required for optimum regulation.

Refer to chart at end of section.

6AX8

Refer to chart at end of section.

6AY3



9HP

Socket terminals 1, 3, 6, and 8 should not be used as tie points. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. Types 12AY3A and 17AY3A are identical with type 6AY3B except for heater ratings.

HALF-WAVE  
VACUUM RECTIFIER

6AY3B

12AY3A, 17AY3A

Novar type used as damper tube in horizontal-deflection circuits of black-and-white television receivers. Outlines section, 30B; requires novar 9-contact socket.

|   | 6AY3B | 12AY3A | 17AY3A |         |
|---|-------|--------|--------|---------|
| Heater Voltage (ac/dc) .....                  | 6.3   | 12.6   | 16.8   | volts   |
| Heater Current .....                          | 1.2   | 0.6    | 0.45   | amperes |
| Heater Warm-up Time (Average) .....           | —     | 11     | 11     | seconds |
| Direct Interelectrode Capacitances (Approx.): |       |        |        |         |
| Plate to Cathode and Heater .....             |       |        | 6.5    | pF      |
| Cathode to Plate and Heater .....             |       |        | 9      | pF      |
| Heater to Cathode .....                       |       |        | 2.8    | pF      |

Damper Service

For operation in a 525-line, 30-frame system

MAXIMUM RATINGS (Design-Maximum Values)

|                                   |      |       |       |
|-----------------------------------|------|-------|-------|
| Peak Inverse Plate Voltage# ..... | 5000 | volts |       |
| Peak Plate Current .....          | 1100 | mA    |       |
| Average Plate Current .....       | 175  | mA    |       |
| Plate Dissipation .....           | 6.5  | watts |       |
| Heater-Cathode Voltage:           |      |       |       |
| Peak value .....                  | +300 | —5000 | volts |
| Average value .....               | +100 | —900  | volts |


# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

Refer to chart at end of section.

6AY11

MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE

6AZ8



9ED

Miniature type used in color and black-and-white television receiver applications. The pentode unit is used as an if amplifier, video amplifier, age amplifier, or reactance tube. The triode unit is used in low-frequency oscillator, sync-separator, sync-clipper, and phase-splitter circuits. Outlines section, 6B; requires miniature 9-contact socket.

|                              |          |        |
|------------------------------|----------|--------|
| Heater Voltage (ac/dc) ..... | 6.3      | volts  |
| Heater Current .....         | 0.45     | ampere |
| Heater-Cathode Voltage:▲     |          |        |
| Peak value .....             | ±200 max | volts  |
| Average value .....          | 100 max  | volts  |

Direct Interelectrode Capacitances:

|   |           |    |
|---|-----------|----|
| Triode Unit:  |           |    |
| Grid to Plate .....   | 1.7       | pF |
| Grid to Cathode, Heater, Pentode Grid No.3, and Internal Shield .....         | 2         | pF |
| Plate to Cathode, Heater, Pentode Grid No.3, and Internal Shield .....        | 1.7       | pF |
| Pentode Unit:   |           |    |
| Grid No.1 to Plate .....  | 0.02 max  | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 6.5       | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     | 2.2       | pF |
| Triode Grid to Pentode Plate .....  | 0.027 max | pF |
| Pentode Grid No.1 to Triode Plate .....                                       | 0.020 max | pF |
| Pentode Plate to Triode Plate .....   | 0.045 max | pF |

\* The heater-cathode voltage of the pentode unit should not exceed the value of the operating cathode bias. Grid No.3 will be made negative with respect to cathode if this value is exceeded, and thus possibly cause a change in tube characteristics.

Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Center Values)

|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage .....   | 300         | 300                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —           | 300                | volts |
| Grid-No.2 Voltage .....                                     | —           | See curve page 300 | 300   |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0           | 0                  | volts |
| Plate Dissipation .....                                     | 2.6         | 2                  | watts |
| Grid-No.2 Input:  |             |                    |       |
| For grid-No.2 voltages up to 150 volts .....                | —           | 0.5                | watt  |
| For grid-No.2 voltages between 150 and 300 volts .....      | —           | See curve page 300 | 300   |

CHARACTERISTICS

|   | Triode Unit | Pentode Unit |       |
|---|-------------|--------------|-------|
| Plate Supply Voltage .....  | 200         | 200          | volts |
| Grid-No.2 Voltage .....   | —           | 150          | volts |
| Grid-No.1 Voltage .....   | -6          | —            | volts |
| Cathode-Bias Resistor .....   | —           | 180          | ohms  |
| Amplification Factor .....  | 19          | —            |       |
| Plate Resistance (Approx.) .....                                    | 5750        | 300000       | ohms  |
| Transconductance .....  | 3300        | 6000         | μmhos |
| Plate Current .....   | 13          | 9.5          | mA    |
| Grid-No.2 Current .....   | —           | 3            | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA .....        | -19         | —            | volts |
| Grid-No.1 Voltage (Approx.) for transconductance of 100 μmhos ..... | —           | -12.5        | volts |

MAXIMUM CIRCUIT VALUES

|                                  |     |      |        |
|----------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance:*   |     |      |        |
| For fixed-bias operation .....   | 0.5 | 0.25 | megohm |
| For cathode-bias operation ..... | 1   | 1    | megohm |

\* If either unit is operating at maximum rated conditions, grid-No.1-circuit resistance for both units should not exceed the stated values.

**6B4G** Refer to chart at end of section.

**6B5** Refer to chart at end of section.

**6B6G** Refer to chart at end of section.

**6B7** Refer to chart at end of section.

**6B7S**

**6B8** Refer to chart at end of section.


**6B8G**

**6B10**

8B10

TWIN DIODE—  
MEDIUM-MU TWIN TRIODE

Duodecar type used in television receiver applications; diode units are used in horizontal-phase-detector circuits, and triode units are used in horizontal-oscillator circuits. Outlines section, 8A; requires duodecar 12-contact socket. Type 8B10 is identical with type 6B10 except for heater ratings.



12BF

|                                     |             |             |         |
|-------------------------------------|-------------|-------------|---------|
|                                     | <b>6B10</b> | <b>8B10</b> |         |
| Heater Voltage (ac/dc) .....        | 6.3         | 8.5         | volts   |
| Heater Current .....                | 0.6         | 0.45        | ampere  |
| Heater Warm-up Time (Average) ..... | 11          | 11          | seconds |
| Heater-Cathode Voltage:             |             |             |         |
| Peak value .....                    | ±200 max    | ±200 max    | volts   |
| Average value .....                 | 100 max     | 100 max     | volts   |

**Class A<sub>1</sub> Amplifier (Each Triode Unit)**

|  |     |  |       |
|--|-----|--|-------|
| <b>MAXIMUM RATING (Design-Maximum Value)</b> |     |  |       |
| Plate Voltage .....                          | 330 |  | volts |
| Average Cathode Current .....                | 20  |  | mA    |
| Plate Dissipation .....                      | 3   |  | watts |

**CHARACTERISTICS**

|   |      |       |
|---|------|-------|
| Plate Voltage .....                                     | 250  | volts |
| Grid Voltage .....                                      | —8   | volts |
| Amplification Factor .....                              | 18   |       |
| Plate Resistance (Approx.) .....                        | 7200 | ohms  |
| Transconductance .....                                  | 2500 | μmhos |
| Plate Current .....                                     | 10   | mA    |
| Grid Voltage (Approx.) for plate current of 50 μA ..... | —20  | volts |

**MAXIMUM CIRCUIT VALUES**


|                                  |      |        |  |
|----------------------------------|------|--------|--|
| Grid-Circuit Resistance:         |      |        |  |
| For fixed-bias operation .....   | 0.25 | megohm |  |
| For cathode-bias operation ..... | 1    | megohm |  |

**Diode Units (Each Unit)**

|  |   |       |  |
|--|---|-------|--|
| <b>MAXIMUM RATING (Design-Maximum Value)</b>       |   |       |  |
| Plate Current .....                                | 5 | mA    |  |
| <b>CHARACTERISTIC Instantaneous Value</b>          |   |       |  |
| Tube Voltage Drop for plate current of 20 mA ..... | 5 | volts |  |

Refer to chart at end of section.

**6BA3**



**7BK**

**REMOTE-CUTOFF PENTODE**

**6BA6**  
**6BA6/EF93**  
12BA6

Miniature types used as rf amplifiers in standard broadcast and FM receivers, as well as in wide-band, high-frequency applications. The low value of grid-No.1-to-plate capacitance minimizes regenerative effects, while the high transconductance makes possible high signal-to-noise ratio. Outlines section, 5C; require miniature 7-contact socket. Type 12BA6 is identical with type 6BA6 except for heater ratings.

|   |                  |              |        |
|---|------------------|--------------|--------|
|   | <b>6BA6</b>      | <b>12BA6</b> |        |
|   | <b>6BA6/EF93</b> |              |        |
| Heater Voltage (ac/dc) .....  | 6.3              | 12.6         | volts  |
| Heater Current .....  | 0.3              | 0.15         | ampere |
| Heater-Cathode Voltage:   |                  |              |        |
| Peak value .....  | ±200 max         | ±200 max     | volts  |
| Average value .....   | 100 max          | 100 max      | volts  |
| Direct Interelectrode Capacitances:   |                  |              |        |
| Grid No.1 to Plate .....  |                  | 0.0035 max   | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... |                  | 5.5          | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     |                  | 5*           | pF     |

\* This value is 5.5 pF with external shield connected to cathode.


Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage                                       | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value | 0                  | volts |
| Grid-No.2 (Screen-Grid) Voltage                     | See curve page 300 |       |
| Grid-No.2 Supply Voltage                            | 330                | volts |
| Plate Dissipation                                   | 3.4                | watts |
| Grid-No.2 Input:                                    |                    |       |
| For grid-No.2 voltages up to 165 volts              | 0.7                | watt  |
| For grid-No.2 voltages between 165 and 330 volts    | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:                   |                    |       |
| Negative-bias value                                 | 55                 | volts |
| Positive-bias value                                 | 0                  | volts |

## CHARACTERISTICS

|   |           |                      |            |
|---|-----------|----------------------|------------|
| Plate Supply Voltage  | 100       | 250                  | volts      |
| Grid No.3 and Internal Shield                                     | Connected | to cathode at socket |            |
| Grid-No.2 Supply Voltage  | 100       | 100                  | volts      |
| Cathode-Bias Resistor   | 68        | 68                   | ohms       |
| Plate Resistance (Approx.)  | 0.25      | 1                    | megohm     |
| Transconductance  | 4300      | 4400                 | $\mu$ mhos |
| Plate Current   | 10.8      | 11                   | mA         |
| Grid-No.2 Current   | 4.4       | 4.2                  | mA         |
| Grid-No.1 Voltage (Approx.) for transconductance of 40 $\mu$ mhos | -20       | -20                  | volts      |

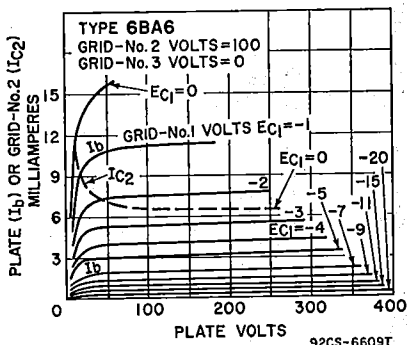


## Installation and Application

Control-grid bias variation is effective in changing the volume of the receiver. To obtain adequate volume control, an available grid-No.1-bias voltage of approximately 50 volts is required. The exact value depends upon the circuit design and operating conditions. This voltage may be obtained, depending on the receiver requirements, from a potentiometer across a fixed supply voltage, from a variable cathode-bias resistor, from the avc system, or from a combination of these methods.

The grid-No.2 (screen-grid) voltage may be obtained from a potentiometer or bleeder circuit across the B-supply source, or through a dropping resistor from the plate supply. The use of series resistors for obtaining satisfactory control of grid-No.2 voltage in the case of four-electrode tubes is usually impossible because of secondary-emission phenomena. In the 6BA6, however, because grid No.3 practically removes these effects, it is practical to obtain grid-No.2 voltage through a series-dropping resistor from the plate supply or from some high intermediate voltage, provided the source does not exceed the plate-supply voltage. With this method, the grid-No.2-to-cathode voltage will fall off very little from minimum to maximum value of the resistor controlling cathode bias. In some cases, it may actually rise. This rise of grid-No.2-to-cathode voltage above the normal maximum value is allowable because both the grid-No.2 current and the plate current are reduced simultaneously by a sufficient amount to prevent damage to the tube. It should be recognized that, in general, the series-



resistor method of obtaining grid-No.2 voltage from a higher voltage supply necessitates the use of the variable cathode-resistor method of controlling volume in order to prevent too high a voltage on grid No.2. When grid-No.2 and control-grid voltage are obtained in this manner, the remote "cutoff" advantage of the 6BA6 can be fully realized. However, it should be noted that the use of a resistor in the grid-No.2 circuit has an effect on the change in plate resistance with variation in grid-No.3 (suppressor-grid) voltage in case grid No.3 is utilized for control purposes.



8CT

**PENTAGRID CONVERTER**

**6BA7**

Miniature type used as converter in AM and FM receivers. Outlines section, 6E; requires miniature 9-contact socket.

|  |          |        |
|--|----------|--------|
| Heater Voltage .....                                     | 6.3      | volts  |
| Heater Current .....                                     | 0.3      | ampere |
| Peak Heater-Cathode Voltage .....                        | ±90      | volts  |
| Direct Interelectrode Capacitances:                      |          |        |
| Grid No. 3 to All Other Electrodes .....                 | 9.5      | pF     |
| Plate to All Other Electrodes .....                      | 8.3      | pF     |
| Grid No. 1 to All Other Electrodes .....                 | 6.7      | pF     |
| Grid No. 3 to Plate .....                                | 0.19 max | pF     |
| Grid No. 3 to Grid No. 1 .....                           | 0.1 max  | pF     |
| Grid No. 1 to Plate .....                                | 0.05 max | pF     |
| Grid No. 1 to All Other Electrodes, except Cathode ..... | 3.4      | pF     |
| Grid No. 1 to Cathode .....                              | 3.3      | pF     |
| Cathode to All Other Electrodes except Grid No. 1 .....  | 4        | pF     |

**Converter Service**

**MAXIMUM RATINGS (Design-Center Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                             | 300 | volts |
| Grid-No.5-and-Internal-Shield Voltage .....     | 0   | volts |
| Grids-No.2-and-No.4 (Screen-Grid) Voltage ..... | 100 | volts |
| Grids-No.2-and-No.4 Supply Voltage .....        | 300 | volts |
| Plate Dissipation .....                         | 2   | watts |
| Grids-No.2-and-No.4 Input .....                 | 1.5 | watts |
| Total Cathode Current .....                     | 22  | mA    |
| Grid-No.3 Voltage:                              |     |       |
| Negative-bias value .....                       | 100 | volts |
| Positive-bias value .....                       | 0   | volts |

**CHARACTERISTICS (Separate Excitation)\***

|   |                              |       |        |
|---|------------------------------|-------|--------|
| Plate Voltage .....                             | 100                          | 250   | volts  |
| Grid No.5 and Internal Shield .....             | Connected directly to ground |       |        |
| Grids-No.2-and-No.4 (Screen-Grid) Voltage ..... | 100                          | 100   | volts  |
| Grid-No.3 (Control-Grid) Voltage .....          | -1                           | -1    | volt   |
| Grid-No.1 (Oscillator-Grid) Resistor .....      | 20000                        | 20000 | ohms   |
| Plate Resistance (Approx.) .....                | 0.5                          | 1     | megohm |
| Conversion Transconductance .....               | 900                          | 950   | μmhos  |
| Conversion Transconductance (Approx.)** .....   | 3.5                          | 3.5   | μmhos  |
| Plate Current .....                             | 3.6                          | 3.8   | mA     |
| Grids-No.2-and-No.4 Current .....               | 10.2                         | 10    | mA     |
| Grid-No.1 Current .....                         | 0.35                         | 0.35  | mA     |
| Total Cathode Current .....                     | 14.2                         | 14.2  | mA     |

NOTE: The transconductance between grid No.1 and grids No.2 and No.4 connected to plate (not oscillating) is approximately 8000 μmhos under the following conditions: signal applied to grid No.1 at zero bias; grids No.2 and No.4 and plate at 100 volts; grid No.3 grounded. Under the same conditions, the plate current is 32 milliamperes, and the amplification factor is 15.5.

\* The characteristics shown with separate excitation correspond very closely with those obtained in a self-excited oscillator circuit operating with zero bias.

\*\* With grid-No.3 bias of -20 volts.


▲ Internal Shield (pins No.6 and No.8) connected directly to ground.

**6BA8A**

8BA8A

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used in color and black-and-white television receivers. The pentode unit is used as a video amplifier, an age amplifier, or a reactance tube. The triode unit is used in low-frequency oscillator and phase-splitter circuits. **Outlines section, 6E**; requires miniature 9-contact socket. Type 8BA8A is identical with type 6BA8A except for the heater ratings.



|   | 6BA8A    | 8BA8A    |         |
|---|----------|----------|---------|
| Heater Voltage (ac/dc) .....  | 6.3      | 8.4      | volts   |
| Heater Current .....  | 0.3      | 0.45     | ampere  |
| Heater Warm-up Time (Average) .....   | 11       | —        | seconds |
| Heater-Cathode Voltage:   |          |          |         |
| Peak value .....  | ±200 max | ±200 max | volts   |
| Average value .....   | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):                                 |          |          |         |
| Triode Unit:  |          |          |         |
| Grid to Plate .....   | 2.2      | 2.2      | pF      |
| Grid to Cathode and Heater .....  | 2.5      | 2.7      | pF      |
| Plate to Cathode and Heater .....   | 0.4      | 1.9      | pF      |
| Pentode Unit:   |          |          |         |
| Grid No.1 to Plate .....  | 0.06     | 0.05     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 10       | 10       | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     | 3.6      | 4.5      | pF      |
| Triode Grid to Pentode Plate .....  | 0.016    | 0.006    | pF      |
| Pentode Grid No.1 to Triode Plate .....                                       | 0.006    | 0.003    | pF      |
| Pentode Plate to Triode Plate .....   | 0.15     | 0.023    | pF      |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Center Values)**

|  | Triode Unit | Pentode Unit       |       |
|--|-------------|--------------------|-------|
| Plate Voltage .....                                    | 300         | 300                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....           | —           | 300                | volts |
| Grid-No.2 Voltage .....                                | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:                      |             |                    |       |
| Negative-bias value .....                              | —           | —50                | volts |
| Positive-bias value .....                              | —           | 0                  | volts |
| Plate Dissipation .....                                | 2           | 3.25               | watts |
| Grid-No.2 Input:                                       |             |                    |       |
| For grid-No.2 voltages up to 150 volts .....           | —           | 1                  | watt  |
| For grid-No.2 voltages between 150 and 300 volts ..... | —           | See curve page 300 |       |

**CHARACTERISTICS**

|  |      |       |       |
|--|------|-------|-------|
| Plate-Supply Voltage .....                                   | 200  | 200   | volts |
| Grid-No.2 Supply Voltage .....                               | —    | 150   | volts |
| Grid-No.1 Voltage .....                                      | —8   | —     | volts |
| Cathode-Bias Resistor .....                                  | —    | 180   | ohms  |
| Amplification Factor .....                                   | 18   | —     |       |
| Plate Resistance (Approx.) .....                             | 6700 | 40000 | ohms  |
| Transconductance .....                                       | 2700 | 9000  | μmhos |
| Plate Current .....  | 8    | 13    | mA    |
| Grid-No.2 Current .....                                      | —    | 3.5   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA ..... | —16  | —10   | volts |

**MAXIMUM CIRCUIT VALUES**


|                                  |     |      |        |
|----------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance:    |     |      |        |
| For fixed-bias operation .....   | 0.5 | 0.25 | megohm |
| For cathode-bias operation ..... | 1   | 1    | megohm |

**6BA11**

8BA11

**TRIODE—TWIN PENTODE**

Duodecar type used as vertical-deflection oscillator and for combined sync-age applications in color and black-and-white television receivers. **Outlines section, 8B**; requires duodecar 12-contact socket. Type 8BA11 is identical with type 6BA11 except for heater ratings.



12ER

|  | 6BA11    | 8BA11     |         |
|--|----------|-----------|---------|
| Heater Voltage (ac/dc) .....                           | 6.3      | 8.4       | volts   |
| Heater Current .....                                   | 0.6      | 0.45      | amperes |
| Heater Warm-up Time .....                              | 11       | 11        | seconds |
| Heater-Cathode Voltage:                                |          |           |         |
| Peak value .....                                       | ±200 max | ±200 max  | volts   |
| Average value .....                                    | 100 max  | 100 max   | volts   |
| Direct Interelectrode Capacitances:                    |          |           |         |
| Triode Unit:   |          |           |         |
| Grid to Plate .....                                    |          | 2         | pF      |
| Grid to Cathode and Heater .....                       |          | 2         | pF      |
| Plate to Cathode, Heater, and Internal Shield .....    |          | 1.9       | pF      |
| Pentode Unit:  |          |           |         |
| Grid No.3 to Plate (Each Unit) .....                   |          | 2         | pF      |
| Grid No.3 to all Other Electrodes (Each Grid) .....    |          | 3.6       | pF      |
| Grid No.1 to all Other Electrodes .....                |          | 6         | pF      |
| Plate to all Other Electrodes (Each Plate) .....       |          | 3         | pF      |
| Grid No.3 of Pentode 1 to Grid No.3 of Pentode 2 ..... |          | 0.026 max | pF      |

**Triode Unit as Class A<sub>1</sub> Amplifier**

|  |      |  |        |
|--|------|--|--------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>           |      |  |        |
| Plate Voltage .....                                      | 300  |  | volts  |
| Average Cathode Current .....                            | 20   |  | mA     |
| Plate Dissipation .....                                  | 1.5  |  | watts  |
| <b>CHARACTERISTICS</b>                                   |      |  |        |
| Plate Voltage .....                                      | —250 |  | volts  |
| Grid Voltage .....                                       | —11  |  | volts  |
| Amplification Factor .....                               | 18   |  |        |
| Transconductance .....                                   | 1800 |  | μmhos  |
| Plate Current .....                                      | 5    |  | mA     |
| Grid Voltage (Approx.) for plate current of 100 μA ..... | —18  |  | volts  |
| <b>MAXIMUM CIRCUIT VALUES</b>                            |      |  |        |
| Grid-Circuit Resistance:                                 |      |  |        |
| For fixed-bias operation .....                           | 0.25 |  | megohm |
| For cathode-bias operation .....                         | 1    |  | megohm |

**Pentode Unit as Class A<sub>1</sub> Amplifier**

|   |      |  |       |
|---|------|--|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>              |      |  |       |
| Plate Voltage (Each Unit) .....                             | 300  |  | volts |
| Grid-No.3 (Suppressor-Grid) Voltage (Each Unit):            |      |  |       |
| Peak positive value .....                                   | 50   |  | volts |
| DC negative value .....                                     | 50   |  | volts |
| DC positive value .....                                     | 3    |  | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                       | 150  |  | volts |
| Grid-No.1 (Control-Grid) Voltage, Negative bias value ..... | 50   |  | volts |
| Cathode Current .....                                       | 12   |  | mA    |
| Plate Dissipation (Each Unit) .....                         | 1.1  |  | watts |
| Grid-No.2 Input .....                                       | 0.75 |  | watt  |

**CHARACTERISTICS (With Both Units Operating)■**

|                                     |      |      |       |
|-------------------------------------|------|------|-------|
| Plate Voltage (Each Unit) .....     | 100  | 100  | volts |
| Grid-No.3 Voltage (Each Unit) ..... | —10  | 0    | volts |
| Grid-No.2 Voltage .....             | 67.5 | 67.5 | volts |
| Grid-No.1 Voltage .....             | *    | *    | volts |
| Plate Current (Each Unit) .....     | 0    | 2.5  | mA    |
| Grid-No.2 Current .....             | 7    | 4.4  | mA    |

**CHARACTERISTICS (With One Unit Operating) †**

|   |      |      |       |
|---|------|------|-------|
| Plate Voltage .....   | 100  | 100  | volts |
| Grid-No.3 Voltage .....                                       | 0    | 0    | volts |
| Grid-No.2 Voltage .....                                       | 67.5 | 67.5 | volts |
| Grid-No.1 Voltage .....                                       | 0    | *    | volts |
| Grid-No.3 Transconductance .....                              | —    | 450  | μmhos |
| Grid-No.1 Transconductance .....                              | 1700 | —    | μmhos |
| Plate Current .....   | —    | 2.5  | mA    |
| Grid-No.2 Voltage (Approx.) for plate current of 100 μA ..... | —    | 3.2  | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA ..... | 2.3  | —    | volts |

**MAXIMUM CIRCUIT VALUES**


|  |     |  |        |
|--|-----|--|--------|
| Grid-No.3-Circuit Resistance (Each Unit) ..... | 0.5 |  | megohm |
| Grid-No.1-Circuit Resistance .....             | 0.5 |  | megohm |

\* Adjusted to provide a dc grid-No.1 current of 100 microamperes.  
 † With plate and grid No.3 of the other unit connected to ground.

■ Voltages and plate current apply to each section.

**6BC4****MEDIUM-MU TRIODE**

Miniature type used as an rf amplifier in the cathode-drive circuits of uhf television tuners covering the frequency range of 470 to 890 MHz. Outlines section, 6A; requires miniature 9-contact socket.

**9DR**

|   |         |        |
|---|---------|--------|
| Heater Voltage (ac/dc) .....                  | 6.3     | volts  |
| Heater Current .....                          | 0.225   | ampere |
| Peak Heater-Cathode Voltage .....             | ±75 max | volts  |
| Direct Interelectrode Capacitances (Approx.): |         |        |
| Grid to Plate .....                           | 1.6     | pF     |
| Grid to Heater and Cathode .....              | 2.9     | pF     |
| Plate to Heater and Cathode .....             | 0.26    | pF     |
| Heater to Cathode .....                       | 2.7     | pF     |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Center Values)**

|                         |     |       |
|-------------------------|-----|-------|
| Plate Voltage .....     | 250 | volts |
| Cathode Current .....   | 25  | mA    |
| Plate Dissipation ..... | 2.5 | watts |

**CHARACTERISTICS**

|   |       |       |
|---|-------|-------|
| Plate Supply Voltage .....                              | 150   | volts |
| Cathode-Bias Resistor .....                             | 100   | ohms  |
| Amplification Factor .....                              | 48    |       |
| Plate Resistance (Approx.) .....                        | 4800  | ohms  |
| Transconductance .....                                  | 10000 | μmhos |
| Plate Current .....                                     | 14.5  | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA ..... | -10   | volts |

**MAXIMUM CIRCUIT VALUES**


|                                  |                 |        |
|----------------------------------|-----------------|--------|
| Grid-Circuit Resistance:         |                 |        |
| For fixed-bias operation .....   | Not recommended |        |
| For cathode-bias operation ..... | 0.5             | megohm |

**6BC5**

Refer to chart at end of section.

**6BC5/6CE5****SHARP-CUTOFF PENTODE****3BC5/3CE5**

Miniature type used in compact radio equipment as an rf or if amplifier at frequencies up to 400 MHz. Outlines section, 5C; requires miniature 7-contact socket. For typical operation as resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section. Type 3BC5/3CE5 is identical with type 6BC5/6CE5 except for heater ratings.

**7BD**

|   | <b>3BC5/3CE5</b> | <b>6BC5/6CE5</b> |         |
|---|------------------|------------------|---------|
| Heater Voltage (ac/dc) .....  | 3.15             | 6.3              | volts   |
| Heater Current .....  | 0.6              | 0.3              | ampere  |
| Heater Warm-up Time (Average) .....   | 11               | —                | seconds |
| Heater-Cathode Voltage:   |                  |                  |         |
| Peak value .....  | ±200 max         | ±90 max          | volts   |
| Average value .....   | 100 max          | —                | volts   |
| Direct Interelectrode Capacitances:   |                  |                  |         |
| Pentode Connection:   |                  |                  |         |
| Grid No.1 to Plate .....  |                  | 0.030 max        | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... |                  | 6.5              | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     |                  | 1.8              | pF      |
| Triode Connection:*   |                  |                  |         |
| Grid No.1 to Plate and Grid No.2 .....  |                  | 2.5              | pF      |
| Grid No.1 to Cathode, Heater, Grid No.3, and Internal Shield ..               |                  | 3.9              | pF      |
| Plate and Grid No.2 to Cathode, Heater, Grid No.3, and Internal Shield .....  |                  | 3                | pF      |

\* Grid No.2 connected to plate.

Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Center Values)

|  | Triode Connection* | Pentode Connection |       |
|--|--------------------|--------------------|-------|
| Plate Voltage  | 300                | 300                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                 | —                  | 300                | volts |
| Grid-No.2 Voltage                                      | —                  | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value. | 0                  | 0                  | volts |
| Plate Dissipation                                      | 2.5                | 2                  | watts |
| Grid-No.2 Input:                                       |                    |                    |       |
| For grid-No.2 voltages up to 150 volts                 | —                  | 0.5                | watt  |
| For grid-No.2 voltages between 150 and 300 volts.      | —                  | See curve page 300 |       |

CHARACTERISTICS

|  | Triode Connection* |       | Pentode Connection |      |      |        |
|--|--------------------|-------|--------------------|------|------|--------|
| Plate Supply Voltage                                   | 180                | 250   | 100                | 125  | 250  | volts  |
| Grid-No.2 Supply Voltage                               | —                  | —     | 100                | 125  | 150  | volts  |
| Cathode-Bias Resistor                                  | 330                | 820   | 180                | 100  | 180  | ohms   |
| Amplification Factor                                   | 42                 | 40    | —                  | —    | —    |        |
| Plate Resistance (Approx.)                             | 0.006              | 0.009 | 0.6                | 0.5  | 0.8  | megohm |
| Transconductance                                       | 6000               | 4400  | 4900               | 6100 | 5700 | μmhos  |
| Plate Current  | 8                  | 6     | 4.7                | 8    | 7.5  | mA     |
| Grid-No.2 Current                                      | —                  | —     | 1.4                | 2.4  | 2.1  | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | —                  | —     | -5                 | -6   | -8   | volts  |

\* Grid No.2 connected to plate.


Refer to chart at end of section.

6BC7

6BC8

6BC8/6BZ8

4BC8



9AJ

MEDIUM-MU TWIN TRIODE

Miniature type used as a cascode amplifier in vhf television tuners and in push-pull cathode-drive rf amplifiers. Outlines section, 6B; requires miniature 9-contact socket. Type 4BC8 is identical with type 6BC8 except for heater ratings.

|   | 4BC8      | 6BC8<br>6BC8/6BZ8 |         |
|---|-----------|-------------------|---------|
| Heater Voltage (ac/dc)                            | 4.2       | 6.3               | volts   |
| Heater Current                                    | 0.6       | 0.4               | ampere  |
| Heater Warm-up Time (Average)                     | 11        | —                 | seconds |
| Heater-Cathode Voltage:                           |           |                   |         |
| Peak value  | ±200*max  | ±200*max          | volts   |
| Average value                                     | 100 max   | 100 max           | volts   |
| Direct Interelectrode Capacitances*:              | Unit No.1 | Unit No.2         |         |
| Grid to Plate                                     | 1.2       | 1.2               | pF      |
| Grid to Cathode, Heater, and Internal Shield      | 2.6       | —                 | pF      |
| Cathode to Grid, Heater, and Internal Shield      | —         | 5.5               | pF      |
| Plate to Cathode, Heater, and Internal Shield     | 1.3       | —                 | pF      |
| Plate to Grid, Heater, and Internal Shield        | —         | 2.4               | pF      |
| Plate to Cathode                                  | —         | 0.12              | pF      |
| Heater to Cathode                                 | 2.8       | 2.8               | pF      |
| Plate of Unit No.1 to Plate of Unit No.2          | —         | 0.02 max          | pF      |
| Plate of Unit No.2 to Plate and Grid of Unit No.1 | —         | 0.04 max          | pF      |

\* Rating may be as high as 300 volts under cutoff conditions, when tube is used as a cascode amplifier, the two units are connected in series, and heater is negative with respect to cathode.  
\* With external shield connected to internal shield.

Class A<sub>1</sub> Amplifier (Each Unit)

MAXIMUM RATINGS (Design-Maximum Values)

|                   |      |       |
|-------------------|------|-------|
| Plate Voltage     | 250* | volts |
| Cathode Current   | 22   | mA    |
| Plate Dissipation | 2.2  | watts |

CHARACTERISTICS

|   |      |       |
|---|------|-------|
| Plate Supply Voltage                                    | 150  | volts |
| Cathode-Bias Resistor                                   | 220  | ohms  |
| Plate Resistance (Approx.)                              | 5300 | ohms  |
| Amplification Factor                                    | 35   |       |
| Transconductance  | 6200 | μmhos |
| Plate Current   | 10   | mA    |
| Grid Voltage (Approx.) for transconductance of 50 μmhos | -13  | volts |

## MAXIMUM CIRCUIT VALUES

Grid-Circuit Resistance ..... 0.5 megohm  
 \* Rating may be as high as 300 volts under cutoff conditions, when tube is used as a cascode amplifier, the two units are connected in series, and heater is negative with respect to cathode.

**6BD4**  
**6BD4A**

Refer to chart at end of section.

**6BD6**

Refer to chart at end of section.  
 For replacement use type 6BA6/EF93.

**6BD11**


Refer to chart at end of section.

**6BE3**  
**6BE3/6BZ3**

12BE3,  
 17BE3/17BZ3

Duodecar type used as damper tube in horizontal-deflection circuits of color and black-and-white television receivers. Outlines section, 8D; requires duodecar 12-contact socket. Types 12BE3 and 17BE3/17BZ3 are identical with type 6BE3 except for heater ratings.

**HALF-WAVE  
 VACUUM RECTIFIER**



|   | 6BE3<br>6BE3/6BZ3 | 12BE3 | 17BE3/<br>17BZ3 |         |
|---|-------------------|-------|-----------------|---------|
| Heater Voltage (ac/dc) .....                  | 6.3               | 12.6  | 16.8            | volts   |
| Heater Current .....                          | 1.2               | 0.6   | 0.46            | ampere  |
| Heater Warm-up Time (Average) .....           | —                 | 11    | 11              | seconds |
| Direct Interelectrode Capacitances (Approx.): |                   |       |                 |         |
| Plate to Cathode, and Heater .....            |                   |       | 10              | pF      |
| Cathode to Heater, and Plate .....            |                   |       | 8               | pF      |
| Heater to Cathode .....                       |                   |       | 3.4             | pF      |

**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |      |       |       |
|-----------------------------------|------|-------|-------|
| Peak Inverse Plate Voltage# ..... |      | 5000  | volts |
| Peak Plate Current .....          |      | 1200  | mA    |
| Average Plate Current .....       |      | 200   | mA    |
| Plate Dissipation .....           |      | 6.5   | watts |
| Heater-Cathode Voltage:           |      |       |       |
| Peak value .....                  | +300 | —5000 | volts |
| Average value .....               | +100 | —900  | volts |

**CHARACTERISTIC Instantaneous Value**

|  |  |    |       |
|--|--|----|-------|
| Tube Voltage Drop for dc plate current of 350 mA ..... |  | 25 | volts |
|--|--|----|-------|


# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

**6BE6**

12BE6

**PENTAGRID CONVERTER**

Miniature type used as converter in AM and FM receivers. Outlines section, 5C; requires miniature 7-contact socket. For general discussion of pentagrid types, see Frequency Conversion in Electron Tube Applications section. Type 12BE6 is identical with type 6BE6 except for heater ratings.



**7CH**

|                              | 6BE6 | 12BE6 |        |
|------------------------------|------|-------|--------|
| Heater Voltage (ac/dc) ..... | 6.3  | 12.6  | volts  |
| Heater Current .....         | 0.3  | 0.15  | ampere |

Heater-Cathode Voltage:

|                     |          |          |       |
|---------------------|----------|----------|-------|
| Peak value .....    | ±200 max | ±200 max | volts |
| Average value ..... | 100 max  | 100 max  | volts |

Direct Interelectrode Capacitances:

|   | Unshielded | Shielded* |    |
|---|------------|-----------|----|
| Grid No.3 to Plate .....  | 0.30 max   | 0.25 max  | pF |
| Grid No.3 to Grid No.1 .....  | 0.15 max   | 0.15 max  | pF |
| Grid No.1 to Plate .....  | 0.10 max   | 0.05 max  | pF |
| Grid No.3 to All Other Electrodes .....                                 | 7          | 7         | pF |
| Grid No.1 to All Other Electrodes .....                                 | 5.5        | 5.5       | pF |
| Plate to All Other Electrodes .....                                     | 8.0        | 13.0      | pF |
| Grid No.1 to Cathode and Grid No.5 .....                                | 3          | 3         | pF |
| Cathode and Grid No.5 to All Other Electrodes<br>except Grid No.1 ..... | 15         | 20        | pF |

\* With external shield connected to cathode and grid No.5.

Converter

MAXIMUM RATINGS (Design-Maximum Values)

|   |      |       |
|---|------|-------|
| Plate Voltage .....                             | 330  | volts |
| Grids-No.2-and-No.4 (Screen-Grid) Voltage ..... | 110  | volts |
| Grids-No.2-and-No.4 Supply Voltage .....        | 330  | volts |
| Cathode Current .....                           | 15.5 | mA    |
| Plate Dissipation .....                         | 1.1  | watts |
| Grids-No.2-and-No.4 Input .....                 | 1.1  | watts |
| Grid-No.3 Voltage:                              |      |       |
| Negative-bias value .....                       | 55   | volts |
| Positive-bias value .....                       | 0    | volts |
| Heater-Cathode Voltage:                         |      |       |
| Peak value .....                                | 200  | volts |
| Average value .....                             | 100  | volts |

TYPICAL OPERATION (Separate Excitation)\*

|  |       |       |        |
|--|-------|-------|--------|
| Plate Voltage .....  | 100   | 250   | volts  |
| Grids-No.2-and-No.4 (Screen-Grid) Voltage .....                        | 100   | 100   | volts  |
| Grid-No.1 (Oscillator-Grid) Voltage (rms) .....                        | 10    | 10    | volts  |
| Grid-No.3 (Control-Grid) Voltage .....                                 | -1.5  | -1.5  | volts  |
| Grid-No.1 (Oscillator-Grid) Resistor .....                             | 20000 | 20000 | ohms   |
| Plate Resistance (Approx.) .....                                       | 0.4   | 1     | megohm |
| Conversion Transconductance .....                                      | 455   | 475   | μmhos  |
| Plate Current .....  | 2.6   | 2.9   | mA     |
| Grids-No.2-and-No.4 Current .....                                      | 7.0   | 6.8   | mA     |
| Grid-No.1 Current .....  | 0.5   | 0.5   | mA     |
| Cathode Current .....  | 10.1  | 10.2  | mA     |
| Grid-No.3 Voltage for conversion transconductance<br>of 10 μmhos ..... | -30   | -30   | volts  |

NOTE: The transconductance between grid No.1 and grids No.2 and No.4 connected to plate (not oscillating) is approximately 7250 μmhos under the following conditions: grids No.1 and No.3 at 0 volts; grids No.2 and No.4 and plate at 100 volts. Under the same conditions, the cathode current is 25 mA, and the amplification factor is 20. Grid-No.1 voltage (Approx.) for plate current of 10 μA is -11 volts.

\* The characteristics shown with separate excitation correspond very closely with those obtained in a self-excited circuit operating with zero bias.


Installation and Application

Because of the special structural arrangement of the 6BE6, a change in signal-grid voltage produces little change in cathode current. Consequently, an rf voltage on the signal grid produces little modulation of the electron current flowing in the cathode circuit. This feature is important because it is desirable that the impedance in the cathode circuit should produce little degeneration or regeneration of the signal-frequency input and intermediate-frequency output. Another important feature is that, because signal-grid voltage has very little effect on the space charge near the cathode, changes in avc bias produce little change in oscillator transconductance and in the input capacitance of grid No.1. There is, therefore, little detuning of the oscillator by avc bias.


A typical self-excited oscillator circuit employing the 6BE6 is given in the Circuits section.

In the 6BE6 operation characteristics curves with self-excitation,  $E_k$  is the voltage across the oscillator-coil section between cathode and ground;  $E_g$  is the oscillator voltage between cathode and grid.

OPERATION CHARACTERISTICS WITH SELF-EXCITATION

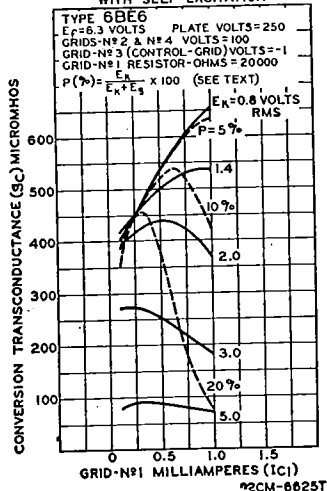

OPERATION CHARACTERISTICS WITH SEPARATE OSCILLATOR EXCITATION

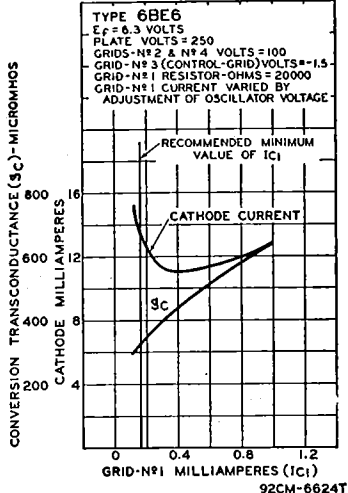

6BF5

Refer to chart at end of section.

6BF6


Refer to chart at end of section.

## 6BF11

### BEAM POWER TUBE— SHARP-CUTOFF PENTODE

12BF11, 17BF11, 24BF11

Duodecar type used as combined detector and amplifier tube in color and black-and-white television receivers. The dual-control, sharp-cutoff pentode unit is used as an FM detector and the beam power unit as an af output amplifier. Outlines section, 8C; requires duodecar 12-contact socket. Types 12BF11, 17BF11 and 24BF11 are identical with type 6BF11 except for heater ratings.



12EZ

|                                     | 6BF11    | 12BF11   | 17BF11   | 24BF11   |         |
|-------------------------------------|----------|----------|----------|----------|---------|
| Heater Voltage (ac/dc) .....        | 6.3      | 12.6     | 16.8     | 24.2     | volts   |
| Heater Current .....                | 1.2      | 0.6      | 0.45     | 0.315    | amperes |
| Heater Warm-up Time (Average) ..... | —        | 11       | 11       | 11       | seconds |
| Heater-Cathode Voltage:             |          |          |          |          |         |
| Peak value .....                    | ±200 max | ±200 max | ±200 max | ±200 max | volts   |
| Average value .....                 | 100 max  | 100 max  | 100 max  | 100 max  | volts   |

Pentode Interelectrode Capacitances:

Pentode Unit:

|  |      |    |
|--|------|----|
| Grid No.1 to Plate .....   | 0.36 | pF |
| Grid No.3 to Plate .....   | 3.2  | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....        | 6.5  | pF |
| Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2, Plate, and Internal Shield ..... | 8    | pF |
| Grid No.1 to Grid No.3 .....   | 0.11 | pF |
| Beam Power Unit:   |      |    |
| Grid No.1 to Plate .....   | 0.24 | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....        | 13   | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....            | 10   | pF |
| Pentode Plate to Beam Power Plate .....  | 0.13 | pF |




Beam Power Unit as Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Maximum Values)

|                                       |     |       |
|---------------------------------------|-----|-------|
| Plate Voltage .....                   | 165 | volts |
| Grid-No.2 (Screen-Grid) Voltage ..... | 150 | volts |
| Average Cathode Current .....         | 65  | mA    |
| Plate Dissipation .....               | 6.5 | watts |
| Grid-No.2 Input .....                 | 1.8 | watts |

TYPICAL OPERATION

|  |      |           |
|--|------|-----------|
| Plate Voltage .....                    | 145  | volts     |
| Grid-No.2 Voltage .....                | 110  | volts     |
| Grid-No.1 (Control-Grid) Voltage ..... | -6   | volts     |
| Peak AF Grid-No.1 Voltage .....        | 6    | volts     |
| Zero-Signal Plate Current .....        | 36   | mA        |
| Maximum-Signal Plate Current .....     | 40   | mA        |
| Zero-Signal Grid No.2 Current .....    | 3    | mA        |
| Maximum-Signal Grid-No.2 Current ..... | 9    | mA        |
| Plate Resistance (Approx.) .....       | 0.03 | megohm    |
| Transconductance .....                 | 8600 | $\mu$ hos |

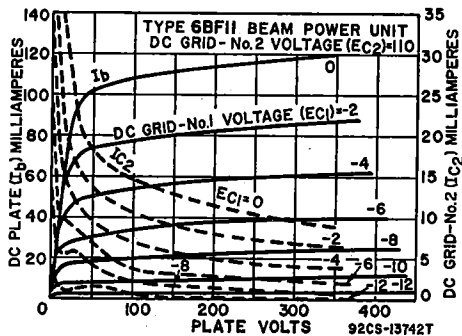

|                                   |       |          |
|-----------------------------------|-------|----------|
| Load Resistance .....             | 30000 | ohms     |
| Total Harmonic Distortion .....   | 10    | per cent |
| Maximum-Signal Power Output ..... | 2.4   | watts    |

MAXIMUM CIRCUIT VALUES

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 0.5  | megohm |

Pentode Unit as Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|   |   |           |
|---|---|-----------|
| Plate Supply Voltage .....  | 150   | volts     |
| Grid No.3 (Control-Grid) .....                                    | 100   | volts     |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                      | Connected to negative end of cathode resistor |           |
| Grid No.1 (Control Grid) .....                                    | Connected to negative end of cathode resistor |           |
| Cathode-Bias Resistor .....                                       | 560   | ohms      |
| Plate Resistance (Approx.) .....                                  | 0.15  | megohm    |
| Transconductance, Grid No.1 to Plate .....                        | 1000  | $\mu$ hos |
| Transconductance, Grid No.3 to Plate .....                        | 400   | $\mu$ hos |
| Plate Current .....   | 1.3   | mA        |
| Grid-No.2 Current .....   | 2   | mA        |
| Grid-No.1 Voltage (Approx.) for plate current of 10 $\mu$ A ..... | -4.5  | volts     |
| Grid-No.3 Voltage (Approx.) for plate current of 10 $\mu$ A ..... | -4.5  | volts     |

Pentode Unit as FM Sound Detector


MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid-No.3 Voltage .....                                     | 28                 | volts |
| Grid No.2 Supply Voltage .....                              | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 1.7                | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 1.1                | watts |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

**MAXIMUM CIRCUIT VALUES**

Grid-No.1-Circuit Resistance:

|                                  |      |        |
|----------------------------------|------|--------|
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 0.5  | megohm |

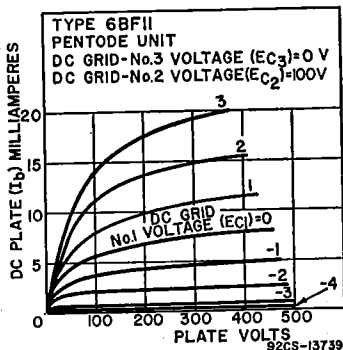

**6BG6G**  
**6BG6GA**

Refer to chart at end of section.

**6BH3**

Refer to chart at end of section.


**6BH3A**

Refer to chart at end of section.

**6BH6**

**SHARP-CUTOFF PENTODE**

Miniature type used as rf amplifier particularly in ac/dc receivers and in mobile equipment where low heater-current drain is important. It is particularly useful in high-frequency, wide-band applications. Outlines section, 5C; requires miniature 7-contact socket.



**7CM**

|   |            |        |
|---|------------|--------|
| Heater Voltage (ac/dc) .....  | 6.3        | volts  |
| Heater Current .....  | 0.15       | ampere |
| Peak Heater-Cathode Voltage .....   | ±90 max    | volts  |
| Direct Interelectrode Capacitances:*  |            |        |
| Grid No.1 to Plate .....  | 0.0035 max | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 5.4        | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     | 4.4        | pF     |

\* Without external shield, or with external shield connected to cathode.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**


|  |                    |       |
|--|--------------------|-------|
| Plate Voltage .....                                    | 300                | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                  | See curve page 300 | volts |
| Grid-No.2 Supply Voltage .....                         | 300                | volts |
| Grid-No.1 (Control-Grid) Voltage:                      |                    |       |
| Negative-bias value .....                              | 50                 | volts |
| Positive-bias value .....                              | 0                  | volts |
| Plate Dissipation .....                                | 3                  | watts |
| Grid-No.2 Input:                                       |                    |       |
| For grid-No.2 voltages up to 150 volts .....           | 0.5                | watt  |
| For grid-No.2 voltages between 150 and 300 volts ..... | See curve page 300 |       |

**CHARACTERISTICS**

|  |                                |      |         |
|--|--------------------------------|------|---------|
| Plate Voltage .....  | 100                            | 250  | volts   |
| Grid No.3 .....  | Connected to cathode at socket |      |         |
| Grid-No.2 Voltage .....                                      | 100                            | 150  | volts   |
| Grid-No.1 Voltage .....                                      | -1                             | -1   | volt    |
| Plate Resistance (Approx.) .....                             | 0.7                            | 1.4  | megohms |
| Transconductance .....                                       | 3400                           | 4600 | μmhos   |
| Plate Current .....  | 3.6                            | 7.4  | mA      |
| Grid-No.2 Current .....                                      | 1.4                            | 2.9  | mA      |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA ..... | -5                             | -7.7 | volts   |

Refer to chart at end of section.

6BH8



12FP

**MEDIUM-MU TWIN TRIODE—  
SHARP-CUTOFF PENTODE**

**6BH11**

Duodecar type used in color and black-and-white television receiver applications. The triode units are used for general-purpose applications, and the pentode unit is used for horizontal-deflection service. **Outlines section, 8B**; requires duodecar 12-contact socket. **Heater:** volts (ac/dc), 6.3; amperes, 0.8; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**Pentode Unit as Horizontal-Deflection Oscillator**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |      |       |
|-----------------------------------|------|-------|
| Plate Voltage                     | 350  | volts |
| Grid-No.2 (Screen-Grid) Voltage   | 330  | volts |
| Grid-No.1 (Control-Grid) Voltage: |      |       |
| Positive-bias value               | 0    | volts |
| Peak negative value               | 175  | volts |
| Peak Cathode Current              | 300  | mA    |
| Average Cathode Current           | 20   | mA    |
| Plate Dissipation                 | 2.5  | watts |
| Grid-No.2 Input                   | 0.55 | watt  |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |     |       |
|-----------------------------------|-----|-------|
| Plate Voltage                     | 330 | volts |
| Grid Voltage, Positive-bias Value | 0   | volts |
| Plate Dissipation                 | 2.5 | watts |

Each Triode Unit

**CHARACTERISTICS**


|   | Pentode Unit | Triode Unit |            |
|---|--------------|-------------|------------|
| Plate Voltage   | 125          | 125         | volts      |
| Grid-No.2 Voltage   | 125          | —           | volts      |
| Grid-No.1 Voltage   | —            | —           | volt       |
| Amplification Factor  | —            | 46          |            |
| Plate Resistance (Approx.)                                  | 200000       | 5400        | ohms       |
| Transconductance  | 7500         | 8500        | $\mu$ mhos |
| Plate Current   | 12           | 13.5        | mA         |
| Grid-No.2 Current   | 4            | —           | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 10 $\mu$ A | —8           | —8          | volts      |

**MAXIMUM CIRCUIT VALUES**

|                               |     |     |         |
|-------------------------------|-----|-----|---------|
| Grid-No.1-Circuit Resistance: |     |     |         |
| For fixed-bias operation      | 2.2 | 2.2 | megohms |
| For cathode-bias operation    | 2.2 | 2.2 | megohms |

Refer to chart at end of section.

6BJ3



7CM

**REMOTE-CUTOFF PENTODE**

**6BJ6**

Miniature type used as rf amplifier in high-frequency and wide-band applications. Features high transconductance and low grid-to-plate capacitance. **Outlines section, 5C**; requires miniature 7-contact socket.

|   |              |        |
|---|--------------|--------|
| Heater Voltage (ac/dc)  | 6.3          | volts  |
| Heater Current  | 0.15         | ampere |
| Peak Heater-Cathode Voltage   | $\pm 90$ max | volts  |
| Direct Interelectrode Capacitances:*                                    |              |        |
| Grid No.1 to Plate  | 0.0035 max   | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 4.5          | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 5.5          | pF     |

\* Without external shield, or with external shield connected to cathode.

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Center Values)

|  |                    |       |
|--|--------------------|-------|
| Plate Voltage                                    | 300                | volts |
| Grid-No.2 (Screen-Grid) Voltage                  | See curve page 300 | volts |
| Grid-No.2 Supply Voltage                         | 300                | volts |
| Plate Dissipation                                | 3                  | watts |
| Grid-No.2 Input:                                 |                    |       |
| For grid-No.2 voltages up to 150 volts           | 0.6                | watt  |
| For grid-No.2 voltages between 150 and 300 volts | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:                |                    |       |
| Negative-bias value                              | 50                 | volts |
| Positive-bias value                              | 0                  | volts |

## CHARACTERISTICS

|   |           |                      |            |
|---|-----------|----------------------|------------|
| Plate Voltage   | 100       | 250                  | volts      |
| Grid No.3   | Connected | to cathode at socket |            |
| Grid-No.2 Voltage   | 100       | 100                  | volts      |
| Grid-No.1 Voltage   | -1        | -1                   | volt       |
| Plate Resistance (Approx.)  | 0.25      | 1.3                  | megohms    |
| Transconductance  | 3650      | 3600                 | $\mu$ mhos |
| Plate Current   | 9         | 9.2                  | mA         |
| Grid-No.2 Current   | 3.5       | 3.3                  | mA         |
| Grid-No.1 Voltage (Approx.) for transconductance of 10 $\mu$ mhos | -20       | -20                  | volts      |

## 6BJ6A

Refer to chart at end of section.


## 6BJ7

Refer to chart at end of section.

## 6BJ8

TWIN DIODE—  
MEDIUM-MU TRIODE

Miniature type used in black-and-white and color television receiver applications. The diode units are used in phase-detector, phase-comparator, ratio-detector or discriminator, and horizontal afc discriminator circuits. The triode unit is used in phase-splitter, audio-frequency amplifier, vertical-deflection amplifier, and low-frequency oscillator applications. Outlines section, 6E; 9-contact socket.



## 9ER

requires miniature

|  |               |         |
|--|---------------|---------|
| Heater Voltage (ac/dc)                               | 6.3           | volts   |
| Heater Current                                       | 0.6           | ampere  |
| Heater Warm-up Time (Average)                        | 11            | seconds |
| Heater-Cathode Voltage:                              |               |         |
| Peak value   | $\pm 200$ max | volts   |
| Average value  | 100 max       | volts   |
| Direct Interelectrode Capacitances:                  |               |         |
| Triode Unit:   |               |         |
| Grid to Plate  | 2.6           | pF      |
| Grid to Cathode and Heater                           | 2.8           | pF      |
| Plate to Cathode and Heater                          | 0.31          | pF      |
| Diode Units:   |               |         |
| Plate to Cathode and Heater (Each Unit)              | 1.9           | pF      |
| Cathode to Plate and Heater (Each Unit)              | 4.6           | pF      |
| Plate of Unit No.1 to Plate of Unit No.2             | 0.06 max      | pF      |
| Plate of Diode Unit No.1 to Triode Grid              | 0.07 max      | pF      |
| Plate of Diode Unit No.2 to Triode Grid              | 0.11 max      | pF      |
| Plate of Either Diode Unit to All Other Electrodes   | 3             | pF      |
| Cathode of Either Diode Unit to All Other Electrodes | 4.8           | pF      |

Triode Unit as Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|                                   |     |       |
|-----------------------------------|-----|-------|
| Plate Voltage                     | 330 | volts |
| Grid Voltage, Positive-bias value | 0   | volts |
| Average Cathode Current           | 22  | mA    |
| Plate Dissipation                 | 4   | watts |

## CHARACTERISTICS

|                            |      |      |            |
|----------------------------|------|------|------------|
| Plate Voltage              | 90   | 250  | volts      |
| Grid Voltage               | 0    | -9   | volts      |
| Amplification Factor       | 22   | 20   |            |
| Plate Resistance (Approx.) | 4700 | 7150 | ohms       |
| Transconductance           | 4700 | 2800 | $\mu$ mhos |

|   |      |     |        |
|---|------|-----|--------|
| Plate Current .....                                       | 13.5 | 8   | mA     |
| Plate Current for grid voltage of -12.5 volts .....       | —    | 1.7 | mA     |
| Grid Voltage (Approx.) for plate current of 10 $\mu$ A .. | -7   | -18 | volts  |
| <b>MAXIMUM CIRCUIT VALUE</b>                              |      |     |        |
| Grid-Circuit Resistance .....                             |      | 1   | megohm |

**Triode Unit as Vertical-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |      |       |
|--|------|-------|
| DC Plate Voltage .....                   | 330  | volts |
| Peak Positive-Pulse Plate Voltage# ..... | 1200 | volts |
| Peak Negative-Pulse Grid Voltage .....   | 275  | volts |
| Peak Cathode Current .....               | 77   | mA    |
| Average Cathode Current .....            | 22   | mA    |
| Plate Dissipation .....                  | 4    | watts |


**MAXIMUM CIRCUIT VALUE**

|   |     |         |
|---|-----|---------|
| Grid-Circuit Resistance, for cathode-bias operation .....                             | 2.2 | megohms |
| # Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds). |     |         |

**Diode Units**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                            |    |    |
|----------------------------|----|----|
| Plate Current (Each Unit): |    |    |
| Peak .....                 | 54 | mA |
| Average .....              | 9  | mA |

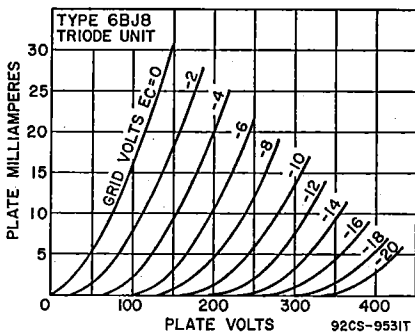


Refer to chart at end of section.

6BK4  
6BK4A  
6BK4B

6BK4C/  
6EL4A

**BEAM TRIODE**



8GC

Glass octal type used for the voltage regulation of high-voltage, low-current dc power supplies in color and black-and-white television receivers. Outlines section, 21B; requires octal socket. Socket terminals 3, 4, 6, and 8 should not be used for tie points. For high voltage and X-ray safety considerations, refer to page 93.

|  |           |        |
|--|-----------|--------|
| Heater Voltage (ac/dc) .....                   | 6.3       | volts  |
| Heater Current .....                           | 0.2       | ampere |
| Peak Heater-Cathode Voltage .....              | -450* max | volts  |
| Direct Interelectrode Capacitances (Approx.):‡ |           |        |
| Grid to Plate .....                            | 0.03      | pF     |
| Grid to Cathode and Heater .....               | 2.6       | pF     |
| Plate to Cathode and Heater .....              | 1         | pF     |

## Shunt Voltage-Regulator Service

## MAXIMUM RATINGS (Design-Maximum Values)

|                               |       |       |
|-------------------------------|-------|-------|
| DC Plate Voltage              | 27000 | volts |
| Unregulated DC Supply Voltage | 60000 | volts |
| DC Grid Voltage               | -135  | volts |
| Peak Grid Voltage*            | -440  | mA    |
| Average Plate Current         | 1.6   | mA    |
| Plate Dissipation             | 40    | watts |

## TYPICAL OPERATION

|  |       |         |
|--|-------|---------|
| Unregulated DC Supply Voltage                        | 36000 | volts   |
| Equivalent Resistance of Unregulated Supply          | 11    | megohms |
| Voltage Divider Values:                              |       |         |
| R <sub>1</sub> (5 watts)                             | 220   | megohms |
| R <sub>2</sub> (2 watts)                             | 1     | megohm  |
| R <sub>3</sub> (0.5 watt)                            | 0.82  | megohm  |
| DC Reference Voltage Supply                          | 200   | volts   |
| Equivalent Resistance of Reference Voltage           | 1000  | ohms    |
| Effective Grid-Plate Transconductance                | 200   | μmhos   |
| DC Plate Current for Load Current of 0 mA            | 1000  | μA      |
| DC Plate Current for Load Current of 1 mA            | 45    | μA      |
| Regulated DC Output Voltage for Load Current of 0 mA | 25000 | volts   |
| Regulated DC Output Voltage for Load Current of 1 mA | 24500 | volts   |

## MAXIMUM CIRCUIT VALUE

|                         |   |         |
|-------------------------|---|---------|
| Grid-Circuit Resistance | 3 | megohms |
|-------------------------|---|---------|

\* For interval of 20 seconds maximum duration during equipment warm-up period.

## X-RADIATION CHARACTERISTIC

|  |     |       |
|--|-----|-------|
| X-Radiation, Maximum:                                |     |       |
| Statistical value controlled on a lot sampling basis | 0.5 | mR/hr |

## CHARACTERISTICS RANGE VALUES

|                     | Note | Min | Max |       |
|---------------------|------|-----|-----|-------|
| Grid Voltage (1)    | 1    | -7  | -   | volts |
| Grid Voltage (2)    | 2    | -   | -40 | volts |
| Grid-Voltage Change | 3    | -   | 9   | volts |


Note 1: With dc plate voltage of 30000 volts and dc plate current of 1 mA.

Note 2: With dc plate voltage of 30000 volts and dc plate current of 0.1 mA.

Note 3: Difference between grid voltage (1) and grid voltage (2).

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

## AVERAGE TRANSFER CHARACTERISTICS

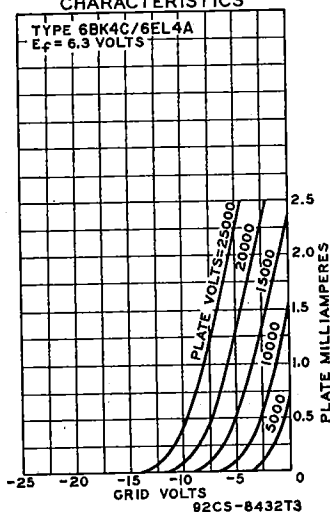

\* Series impedance should be used with the cathode to limit the cathode current under prolonged short-circuit conditions to 450 mA.


† Without external shield.

Refer to chart at end of section.

6BK5

Refer to chart at end of section.

6BK7A



MEDIUM-MU TWIN TRIODE

6BK7B

5BK7A

Miniature type used as a cascode amplifier in vhf color and black-and-white television tuners and in push-pull cathode-drive rf amplifiers. Outlines section, 6B; requires miniature 9-contact socket. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section. Type 5BK7A is identical with type 6BK7B except for heater ratings.

|   | 5BK7A     | 6BK7B     |         |
|---|-----------|-----------|---------|
| Heater Voltage (ac/dc)                        | 4.7       | 6.3       | volts   |
| Heater Current                                | 0.6       | 0.45      | ampere  |
| Heater Warm-up Time (Average)                 | 11        | 11        | seconds |
| Heater-Cathode Voltage:                       |           |           |         |
| Peak value                                    | ±200*max  |           | volts   |
| Average value                                 | 100 max   |           | volts   |
| Direct Interelectrode Capacitances:           | Unit No.1 | Unit No.2 |         |
| Grid to Plate                                 | 1.8       | 1.8       | pF      |
| Grid to Cathode, Heater, and Internal Shield  | 3         | 3         | pF      |
| Plate to Cathode, Heater, and Internal Shield | 1         | 0.9       | pF      |
| Cathode to Grid, Heater, and Internal Shield  | 6         | 6         | pF      |
| Plate to Grid, Heater, and Internal Shield    | 2.4       | 2.4       | pF      |
| Plate to Cathode                              | 0.22      | 0.22      | pF      |
| Heater to Cathode                             | 2.8       | 3         | pF      |
| Grid of Unit No.1 to Grid of Unit No.2        |           | 0.004 max | pF      |
| Plate of Unit No.1 to Plate of Unit No.2      |           | 0.076 max | pF      |

\* Rating may be as high as 300 volts under cutoff conditions when tube is used as a cascode amplifier, the units are connected in series, and heater is negative with respect to cathode.

Class A<sub>1</sub> Amplifier (Each Unit)

| MAXIMUM RATINGS (Design-Center Value) |     |       |
|---------------------------------------|-----|-------|
| Plate Voltage                         | 300 | volts |
| Grid Voltage, Negative-bias value     | 50  | volts |
| Plate Dissipation                     | 2.7 | watts |

CHARACTERISTICS


|   |      |       |
|---|------|-------|
| Plate Supply Voltage                              | 150  | volts |
| Cathode-Bias Resistor                             | 56   | ohms  |
| Amplification Factor                              | 43   |       |
| Plate Resistance (Approx.)                        | 4600 | ohms  |
| Transconductance                                  | 9300 | μmhos |
| Plate Current                                     | 18   | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA | -11  | volts |

Refer to chart at end of section.

6BL4

Refer to chart at end of section.

6BL7GT



MEDIUM-MU TWIN TRIODE

6BL7GTA

Glass octal type used as combined vertical-deflection amplifier and vertical-deflection oscillator in color and black-and-white television receivers. When so operated, it is recommended that unit No.1 (pins 4, 5, and 6) be used as the oscillator. Outlines section, 13D; requires octal socket.

|                         |          |         |
|-------------------------|----------|---------|
| Heater Voltage (ac/dc)  | 6.3      | volts   |
| Heater Current          | 1.5      | amperes |
| Heater-Cathode Voltage: |          |         |
| Peak value              | ±200 max | volts   |
| Average value           | 100 max  | volts   |

| Direct Interelectrode Capacitances (Approx.): | Unit No. 1 | Unit No. 2 |    |
|---|------------|------------|----|
| Grid to Plate .....                           | 6          | 6          | pF |
| Grid to Cathode and Heater .....              | 4.2        | 4.6        | pF |
| Plate to Cathode and Heater .....             | 0.9        | 0.9        | pF |

### Class A<sub>1</sub> Amplifier

#### CHARACTERISTICS (Each Unit)

|   |     |     |      |       |
|---|-----|-----|------|-------|
| Plate Voltage .....                                     | 150 | 250 | 250  | volts |
| Grid Voltage .....                                      | 0   | -17 | -9   | volts |
| Amplification Factor .....                              | —   | —   | 15   |       |
| Plate Resistance (Approx.) .....                        | —   | —   | 2150 | ohms  |
| Transconductance .....                                  | —   | —   | 7000 | μmhos |
| Plate Current .....                                     | 65* | 4   | 40   | mA    |
| Grid Voltage (Approx.) for plate current of 50 μA ..... | —   | —   | -23  | volts |

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

### Vertical-Deflection Oscillator or Amplifier\*

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Center Values)                         | Oscillator | Amplifier |       |
|--|------------|-----------|-------|
| DC Plate Voltage .....   | 500        | 500       | volts |
| Peak Positive-Pulse Plate Voltage#<br>(Absolute Maximum) ..... | —          | 2000A     | volts |
| Peak Negative-Pulse Grid Voltage .....                         | 400        | 250       | volts |
| Peak Cathode Current .....                                     | 210        | 210       | mA    |
| Average Cathode Current .....                                  | 60         | 60        | mA    |
| Plate Dissipation:   |            |           |       |
| For either plate .....   | 10         | 10        | watts |
| For both plates with both units operating .....                | 12         | 12        | watts |

#### MAXIMUM CIRCUIT VALUE

|                               |     |      |         |
|-------------------------------|-----|------|---------|
| Grid-Circuit Resistance ..... | 4.7 | 4.7† | megohms |
|-------------------------------|-----|------|---------|

\* Unless otherwise specified, values are for each unit.

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

△ Under no circumstances should this absolute value be exceeded.

† For cathode-bias operation.

## 6BL8


Refer to chart at end of section.

## 6BL8/ ECF80

4BL8/XCF80

### MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in frequency-changer service in color and black-and-white television receivers. Outlines section, 6B; require miniature 9-contact socket. Type 4BL8/XCF80 is identical with type 6BL8/ECF80 except for heater ratings.



#### 9DC

|                                   | 4BL8/<br>XCF80 | 6BL8/<br>ECF80 |        |
|-----------------------------------|----------------|----------------|--------|
| Heater Voltage (ac/dc) .....      | 4.6            | 6.3            | volts  |
| Heater Current .....              | 0.6            | 0.45           | ampere |
| Peak Heater-Cathode Voltage ..... | ±100 max       | ±100 max       | volts  |

### Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Center Values)           | Triode Unit | Pentode Unit |       |
|--|-------------|--------------|-------|
| Plate Supply Voltage .....                       | 550         | 550          | volts |
| Plate Voltage .....                              | 250         | 250          | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....     | —           | 550          | volts |
| Grid-No.2 Voltage:                               |             |              |       |
| With cathode current of 14 mA .....              | —           | 175          | volts |
| With cathode current less than 10 mA .....       | —           | 200          | volts |
| Cathode Current .....                            | 14          | 14           | mA    |
| Plate Dissipation .....                          | 1.5         | 1.7          | watts |
| Grid-No.2 Input:                                 |             |              |       |
| With plate dissipation greater than 1.2 watts .. | —           | 0.5          | watt  |
| With plate dissipation less than 1.2 watts ..... | —           | 0.75         | watt  |



**CHARACTERISTICS**

|   |      |      |            |
|---|------|------|------------|
| Plate Voltage .....                           | 100  | 170  | volts      |
| Grid-No.2 Voltage .....                       | —    | 170  | volts      |
| Grid-No.1 Voltage .....                       | -2   | -2   | volts      |
| Amplification Factor .....                    | 20   | —    |            |
| Mu-Factor, Grid No.2 to Grid No.1 .....       | —    | 47   |            |
| Plate Resistance (Approx.) .....              | —    | 0.4  | megohm     |
| Transconductance .....                        | 5000 | 6200 | $\mu$ mhos |
| Plate Current .....                           | 14   | 10   | mA         |
| Grid-No.2 Current .....                       | —    | 2.8  | mA         |
| Input Resistance at frequency of 50 MHz ..... | —    | 0.01 | megohm     |
| Equivalent Noise Resistance .....             | —    | 1500 | ohms       |


**MAXIMUM CIRCUIT VALUES**

|                                  |     |     |        |
|----------------------------------|-----|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |     |        |
| For fixed-bias operation .....   | 0.5 | 0.5 | megohm |
| For cathode-bias operation ..... | 0.5 | 1   | megohm |

**6BM8/  
ECL82**

50BM8/UCL82

**HIGH-MU TRIODE—  
POWER PENTODE**



9EX

Miniature type used in color and black-and-white television receiver applications. The pentode unit is used as an audio output tube, and the triode unit as an oscillator and af voltage amplifier. Outlines section, 6G; requires miniature 9-contact socket. Type 50BM8/UCL82 is identical with type 6BM8/ECL82 except for heater ratings.

|                                   |         |               |        |
|-----------------------------------|---------|---------------|--------|
| Heater Voltage .....              | 6.3     | 50            | volts  |
| Heater Current .....              | 0.78    | 0.1           | ampere |
| Peak Heater Cathode Voltage ..... | 100 max | $\pm$ 200 max | volts  |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**

|                                | Triode Unit | Pentode Unit |       |
|--------------------------------|-------------|--------------|-------|
| Plate Supply Voltage .....     | 550         | 900          | volts |
| Plate Voltage .....            | 300         | 600          | volts |
| Grid-No.2 Supply Voltage ..... | —           | 550          | volts |
| Grid-No.2 Voltage .....        | —           | 300          | volts |
| Cathode Current .....          | 15          | 50           | mA    |
| Plate Dissipation .....        | 1           | 7            | watts |
| Grid-No.2 Input .....          | —           | 1.8          | watts |

**CHARACTERISTICS**

|                                  |      |      |            |
|----------------------------------|------|------|------------|
| Plate Voltage .....              | 100  | 200  | volts      |
| Grid-No.2 Voltage .....          | —    | 200  | volts      |
| Grid-No.1 Voltage .....          | 0    | -16  | volts      |
| Amplification Factor .....       | 70   | 9.5* |            |
| Plate Resistance (Approx.) ..... | —    | 0.02 | megohm     |
| Transconductance .....           | 2500 | 6400 | $\mu$ mhos |
| Plate Current .....              | 3.5  | 35   | mA         |
| Grid-No.2 Current .....          | —    | 7    | mA         |

**MAXIMUM CIRCUIT VALUES**

|                                  |   |   |         |
|----------------------------------|---|---|---------|
| Grid-No.1-Circuit Resistance:    |   |   |         |
| For fixed-bias operation .....   | 1 | 1 | megohm  |
| For cathode-bias operation ..... | 2 | 2 | megohms |

\* Grid No.2 to Grid No.1


Refer to chart at end of section.

**6BN4**

**6BN4A**

2BN4A, 3BN4A

**MEDIUM-MU TRIODE**



7EG

Miniature type used as rf amplifier tube in grid-drive circuits of vhf color and black-and-white television tuners. Outlines section, 5C; requires miniature 7-contact socket. Types 2BN4A and 3BN4A are identical with type 6BN4A except for heater ratings.

|  | 2BN4A    | 3BN4A    | 6BN4A    |         |
|--|----------|----------|----------|---------|
| Heat Voltage (ac/dc) .....                     | 2.35     | 3        | 6.3      | volts   |
| Heater Current .....                           | 0.6      | 0.45     | 0.2      | ampere  |
| Heater Warm-up Time (Average) .....            | 11       | 11       | —        | seconds |
| Peak Heater-Cathode Voltage .....              | ±100 max | ±100 max | ±100 max | volts   |
| Direct Interelectrode Capacitances (Approx.):* |          |          |          |         |
| Grid to Plate .....                            |          |          | 1.2      | pF      |
| Grid to Cathode and Heater .....               |          |          | 3.2      | pF      |
| Plate to Cathode and Heater .....              |          |          | 1.4      | pF      |

\* With external shield connected to cathode.

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Center Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 275 | volts |
| Grid Voltage, Positive-bias value ..... | 0   | volts |
| Cathode Current .....                   | 22  | mA    |
| Plate Dissipation .....                 | 2.2 | watts |

#### CHARACTERISTICS

|  |      |       |
|--|------|-------|
| Plate-Supply Voltage .....                               | 150  | volts |
| Cathode-Bias Resistor .....                              | 220  | ohms  |
| Amplification Factor .....                               | 43   |       |
| Plate Resistance (Approx.) .....                         | 5400 | ohms  |
| Transconductance .....                                   | 7700 | μmhos |
| Plate Current .....                                      | 9    | mA    |
| Grid Voltage (Approx.) for plate current of 100 μA ..... | -6   | volts |

#### MAXIMUM CIRCUIT VALUE

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-Circuit Resistance ..... | 0.5 | megohm |
|-------------------------------|-----|--------|

### 6BN6


Refer to chart at end of section.

## 6BN6/6KS6

3BN6, 4BN6

### BEAM TUBE

Miniature type used as combined limiter, discriminator, and audio-voltage amplifier in intercarrier television and FM receivers. Outlines section, 5D; requires miniature 7-contact socket. Types 3BN6 and 4BN6 are identical with type 6BN6/6KS6 except for heater ratings.



7DF

|   | 3BN6     | 4BN6     | 6BN6/6KS6 | 12BN6     |         |
|---|----------|----------|-----------|-----------|---------|
| Heater Voltage (ac/dc) .....  | 3.15     | 4.2      | 6.3       | 12.6      | volts   |
| Heater Current .....  | 0.6      | 0.45     | 0.3       | 0.15      | ampere  |
| Heater Warm-up Time (Average) .....   | 11       | 11       | —         | —         | seconds |
| Heater-Cathode Voltage:   |          |          |           |           |         |
| Peak value .....  | ±200 max | ±200 max | ±200 max  | ±200 max  | volts   |
| Average value .....   | 100 max  | 100 max  | 100 max   | 100 max   | volts   |
| Direct Interelectrode Capacitances:   |          |          |           |           |         |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... |          |          |           | 4.2       | pF      |
| Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2, and Internal Shield ..... |          |          |           | 3.3       | pF      |
| Grid No.1 to Grid No.3 .....  |          |          |           | 0.004 max | pF      |

### Limiter and Discriminator Service


#### MAXIMUM RATINGS (Design-Maximum Values)

|  |     |       |
|--|-----|-------|
| Plate-Supply Voltage .....                   | 330 | volts |
| Grid-No.2 Voltage .....                      | 110 | volts |
| Grid-No.1 Voltage, Positive peak value ..... | 60  | volts |
| Cathode Current .....                        | 13  | mA    |

**TWIN DIODE—  
HIGH-MU TWIN TRIODE**

**6BN8**

8BN8



9ER

Miniature type used in color and black-and-white television receiver applications. The triode unit is used in burst-amplifier, af amplifier, and low-frequency oscillator applications. The diode units are used in phase-detector, ratio-detector or discriminator, and horizontal afc discriminator circuits. Outlines section, 6E; requires miniature 9-contact socket. Type 8BN8 is identical with type 6BN8 except for heater ratings.

|   |             |             |                 |
|---|-------------|-------------|-----------------|
| Heater Voltage (ac/dc)                                    | 6BN8<br>6.3 | 8BN8<br>8.4 |                 |
| Heater Current  | 0.6         | 0.45        | volts<br>ampere |
| Heater Warm-up Time (Average)                             | 11          | 11          | seconds         |
| Heater-Cathode Voltage:                                   |             |             |                 |
| Peak value  | ±200 max    | ±200 max    | volts           |
| Average value   | 100 max     | 100 max     | volts           |
| Direct Interelectrode Capacitances:                       |             |             |                 |
| Triode Grid to Triode Plate                               |             | 2.5         | pF              |
| Triode Grid to Cathode and Heater                         |             | 3.6         | pF              |
| Triode Plate to Cathode and Heater                        |             | 0.25        | pF              |
| Plate of Diode Unit No.1 to Triode Grid                   |             | 0.06 max    | pF              |
| Plate of Diode Unit No.2 to Triode Grid                   |             | 0.1 max     | pF              |
| Plate of Diode Unit No.1 to Plate of Diode Unit No.2      |             | 0.07 max    | pF              |
| Diode Cathode to All Other Electrodes (Each Diode Unit)   |             | 5           | pF              |
| Diode Plate to Diode Cathode and Heater (Each Diode Unit) |             | 1.9         | pF              |
| Diode Cathode to Diode Plate and Heater (Each Diode Unit) |             | 4.8         | pF              |
| Diode Plate to All Other Electrodes (Each Diode Unit)     |             | 3           | pF              |

**Triode Unit as Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |     |       |
|-----------------------------------|-----|-------|
| Plate Voltage                     | 330 | volts |
| Grid Voltage, Positive-bias value | 0   | volts |
| Plate Dissipation                 | 1.7 | watts |

**CHARACTERISTICS**

|   |       |       |       |
|---|-------|-------|-------|
| Plate Voltage                                     | 100   | 250   | volts |
| Grid Voltage                                      | -1    | -3    | volts |
| Amplification Factor                              | 75    | 70    |       |
| Plate Resistance (Approx.)                        | 21000 | 28000 | ohms  |
| Transconductance                                  | 3500  | 2500  | μmhos |
| Plate Current                                     | 1.5   | 1.6   | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA | -2.5  | -5.5  | volts |


**MAXIMUM CIRCUIT VALUE**

|                         |   |        |
|-------------------------|---|--------|
| Grid-Circuit Resistance | 1 | megohm |
|-------------------------|---|--------|

**Diode Units**

**MAXIMUM RATINGS (Design-Maximum Values)**


|                            |    |    |
|----------------------------|----|----|
| Plate Current (Each Unit): |    |    |
| Peak                       | 54 | mA |
| Average                    | 9  | mA |

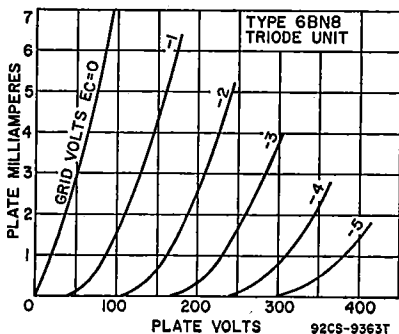

92CS-9363T

# 6BN11

## SHARP-CUTOFF TWIN PENTODE



Duodecar type used as if-amplifier tube in television receivers. Outlines section, 8B; requires duodecar 12-contact socket.

|                           |          |         |
|---------------------------|----------|---------|
| Heater Voltage .....      | 6.3      | volts   |
| Heater Current .....      | 0.8      | ampere  |
| Heater Warm-up Time ..... | —        | seconds |
| Heater-Cathode Voltage:   |          |         |
| Peak value .....          | ±200 max | volts   |
| Average value .....       | 100 max  | volts   |

12GF

### Class A<sub>1</sub> Amplifier (Each Unit)

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 3.1                | watts |
| Grid-No.2 Input .....                                       | 0.65               | watt  |

#### CHARACTERISTICS

|  |                                |        |
|--|--------------------------------|--------|
| Plate Voltage .....  | 125                            | volts  |
| Grid-No.3 (Suppressor Grid) .....                            | Connected to cathode at socket |        |
| Grid-No.2 Voltage .....                                      | 125                            | volts  |
| Cathode-Bias Resistor .....                                  | 56                             | ohms   |
| Plate Resistance (Approx.) .....                             | 0.2                            | megohm |
| Transconductance .....                                       | 13000                          | μmhos  |
| Plate Current .....  | 11                             | mA     |
| Grid-No.2 Current .....                                      | 3.8                            | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA ..... | -3                             | volts  |

#### MAXIMUM CIRCUIT VALUE

|  |      |        |
|--|------|--------|
| Grid-No.1-Circuit Resistance, for cathode-bias operation ..... | 0.25 | megohm |
|--|------|--------|


# 6BQ5

## 6BQ5/EL84

8BQ5, 10BQ5

## POWER PENTODE

Miniature type used in the output stage of audio-frequency amplifiers. Outlines section, 6G; requires miniature 9-contact socket. Types 8BQ5 and 10BQ5 are identical with type 6BQ5 except for heater ratings.



9CV

|  | 6BQ5<br>6BQ5/EL84 | 8BQ5     | 10BQ5    |         |
|--|-------------------|----------|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3               | 8        | 10.6     | volts   |
| Heater Current .....   | 0.76              | 0.6      | 0.45     | ampere  |
| Heater Warm-up Time (Average) .....                          | —                 | 11       | 11       | seconds |
| Heater-Cathode Voltage:                                      |                   |          |          |         |
| Peak value .....   | ±100 max          | ±100 max | ±100 max | volts   |
| Average value .....  | 100 max           | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                          |                   |          |          |         |
| Grid No.1 to Plate .....                                     |                   |          | 0.5 max  | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |                   |          | 10.8     | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |                   |          | 6.5      | pF      |
| Grid No.1 to Heater .....                                    |                   |          | 0.25 max | pF      |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Center Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage .....   | 300 | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                       | 300 | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0   | volts |
| Cathode Current .....                                       | 65  | mA    |

|                         |    |       |
|-------------------------|----|-------|
| Plate Dissipation ..... | 12 | watts |
| Grid No.2 Input .....   | 2  | watts |

**TYPICAL OPERATION**

|  |       |          |
|--|-------|----------|
| Plate Voltage .....                    | 250   | volts    |
| Grid-No.2 Voltage .....                | 250   | volts    |
| Grid-No.1 (Control-Grid) Voltage ..... | -7.3  | volts    |
| Peak AF Grid No.1 Voltage .....        | 6.2   | volts    |
| Zero-Signal Plate Current .....        | 48    | mA       |
| Maximum-Signal Plate Current .....     | 50.6  | mA       |
| Zero-Signal Grid-No.2 Current .....    | 5.5   | mA       |
| Maximum-Signal Grid-No.2 Current ..... | 10    | mA       |
| Plate Resistance (Approx.) .....       | 38000 | ohms     |
| Transconductance .....                 | 11300 | μmhos    |
| Load Resistance .....                  | 4500  | ohms     |
| Total Harmonic Distortion .....        | 10    | per cent |
| Maximum-Signal Power Output .....      | 5.7   | watts    |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.-Circuit Resistance:     |     |        |
| For fixed-bias operation .....   | 0.3 | megohm |
| For cathode-bias operation ..... | 1   | megohm |

**Push-Pull Class AB<sub>1</sub> Amplifier**

**MAXIMUM RATINGS** (Same as for Single-Tube Class A<sub>1</sub> Amplifier)

**TYPICAL OPERATION** (Values are for two tubes)

|  |      |      |          |
|--|------|------|----------|
| Plate Supply Voltage .....                       | 250  | 300  | volts    |
| Grid-No.2 Supply Voltage .....                   | 250  | 300  | volts    |
| Cathode-Bias Resistor .....                      | 130  | 130  | ohms     |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage .....     | 22.6 | 28.3 | volts    |
| Zero-Signal Plate Current .....                  | 62   | 72   | mA       |
| Maximum-Signal Plate Current .....               | 75   | 92   | mA       |
| Zero-Signal Grid-No.2 Current .....              | 7    | 8    | mA       |
| Maximum-Signal Grid-No.2 Current .....           | 15   | 22   | mA       |
| Effective Load Resistance (Plate-to-plate) ..... | 8000 | 8000 | ohms     |
| Total Harmonic Distortion .....                  | 3    | 4    | per cent |
| Maximum-Signal Power Output .....                | 11   | 17   | watts    |

**MAXIMUM CIRCUIT VALUES**


|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |        |
| For fixed-bias operation .....   | 0.3 | megohm |
| For cathode-bias operation ..... | 1   | megohm |

Refer to chart at end of section.

**6BQ6GT**

**6BQ6GTB**  
**/6CU6**

12BQ6GTB/12CU6,  
25BQ6GTB/25CU6



**6AM**

**BEAM POWER TUBE**

Glass octal type used as horizontal-deflection amplifier in color and black-and-white television receivers. Outlines section, 14D; requires octal socket. This type may be supplied with pin No.1 omitted. Types 12BQ6GTB/12CU6 and 25BQ6GTB/25CU6 are identical with type 6BQ6GTB/6CU6 except for heater ratings.

|  | 6BQ6GTB/<br>6CU6 | 12BQ6GTB/<br>12CU6 | 25BQ6GTB/<br>25CU6 |         |
|--|------------------|--------------------|--------------------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3              | 12.6               | 25                 | volts   |
| Heater Current .....   | 1.2              | 0.6                | 0.3                | ampere  |
| Heater Warm-up Time (Average) .....                          | —                | 11                 | —                  | seconds |
| Heater-Cathode Voltage:                                      |                  |                    |                    |         |
| Peak value .....   | ±200 max         | ±200 max           | ±200 max           | volts   |
| Average value .....  | 100 max          | 100 max            | 100 max            | volts   |
| Direct Interelectrode Capacitances (Approx.):                |                  |                    |                    |         |
| Grid No.1 to Plate .....                                     |                  |                    | 0.6                | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |                  |                    | 15                 | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |                  |                    | 7                  | pF      |

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|  |      |       |       |       |
|--|------|-------|-------|-------|
| Plate Voltage                                | 60   | 150   | 250   | volts |
| Grid-No.2 Voltage                            | 150  | 150   | 150   | volts |
| Grid-No.1 Voltage                            | 0    | -22.5 | -22.5 | volts |
| Mu-Factor, Grid No.2 to Grid No.1            | —    | 4.3   | —     |       |
| Plate Resistance (Approx.)                   | —    | —     | 14500 | ohms  |
| Transconductance                             | —    | —     | 5900  | μmhos |
| Plate Current                                | 260* | —     | 57    | mA    |
| Grid-No.2 Current                            | 26*  | —     | 2.1   | mA    |
| Grid-No.1 Voltage (Approx.) for plate mA = 1 | —    | —     | -43   | volts |

\* These values can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

## Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Center Values)

|   |       |       |
|---|-------|-------|
| DC Plate Voltage  | 600   | volts |
| Peak Positive-Pulse Plate Voltage <sup>#</sup> (Absolute Maximum) | 6000† | volts |
| Peak Negative-Pulse Plate Voltage                                 | 1250  | volts |
| DC Grid-No.2 (Screen-Grid) Voltage                                | 200   | volts |
| Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage              | 300   | volts |
| Peak Cathode Current  | 400   | mA    |
| Average Cathode Current   | 110   | mA    |
| Plate Dissipation*  | 11    | watts |
| Grid-No.2 Input   | 2.5   | watts |
| Bulb Temperature (At hottest point)                               | 220   | °C    |

## MAXIMUM CIRCUIT VALUE

Grid-No.1-Circuit Resistance 0.47 megohm

<sup>#</sup> Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

† Under no circumstances should this absolute value be exceeded.

\* A bias resistor or other means is required to protect the tube in absence of excitation.

6BQ7


Refer to chart at end of section.

**6BQ7A**  
**6BQ7A/**  
**6BZ7/**  
**6BS8**

4BQ7A, 5BQ7A

## MEDIUM-MU TWIN TRIODE

Miniature type used as a cascode amplifier in vhf color and black-and-white television tuners in push-pull cathode-drive rf amplifiers. Outlines section, 6B; requires miniature 9-contact socket. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section. Types 4BQ7A and 5BQ7A are identical with type 6BQ7A except for heater ratings.



9AJ

|                               | 4BQ7A    | 5BQ7A    | 6BQ7A<br>6BQ7A/6BZ7/<br>6BS8 |         |
|-------------------------------|----------|----------|------------------------------|---------|
| Heater Voltage (ac/dc)        | 4.2      | 5.6      | 6.3                          | volts   |
| Heater Current                | 0.6      | 0.45     | 0.4                          | ampere  |
| Heater Warm-up Time (Average) | 11       | 11       | —                            | seconds |
| Heater-Cathode Voltage:       |          |          |                              |         |
| Peak value                    | ±200*max | ±200*max | ±200*max                     | volts   |
| Average value                 | 100 max  | 100 max  | 100 max                      | volts   |

Direct Interelectrode Capacitances:°

|   | Unit No.1 | Unit No.2 |    |
|---|-----------|-----------|----|
| Grid to Plate                                     | 1.2       | 1.2       | pF |
| Grid to Cathode, Heater, and Internal Shield      | 2.6       | —         | pF |
| Cathode to Grid, Heater, and Internal Shield      | —         | 5         | pF |
| Plate to Cathode, Heater, and Internal Shield     | 1.2       | —         | pF |
| Plate to Grid, Heater, and Internal Shield        | —         | 2.2       | pF |
| Plate to Cathode                                  | 0.12      | 0.12      | pF |
| Heater to Cathode                                 | 2.6       | 2.6       | pF |
| Plate of Unit No.1 to Plate of Unit No.2          | —         | 0.010 max | pF |
| Plate of Unit No.2 to Plate and Grid of Unit No.1 | —         | 0.024 max | pF |

\* Rating may be high as 300 volts under cutoff conditions, when tube is used as a cascode amplifier, the two units are connected in series, and heater is negative with respect to cathode.

° With external shield connected to internal shield.

Class A<sub>1</sub> Amplifier (Each Unit)

MAXIMUM RATINGS (Design-Center Values)

|                      |      |       |
|----------------------|------|-------|
| Plate Supply Voltage | 250* | volts |
| Cathode Current      | 20   | mA    |
| Plate Dissipation    | 2    | watts |



CHARACTERISTICS

|                             |      |       |
|-----------------------------|------|-------|
| Plate Supply Voltage        | 150  | volts |
| Cathode-Bias Resistor       | 220  | ohms  |
| Amplification Factor        | 38   |       |
| Plate Resistance (Approx.)  | 5900 | ohms  |
| Transconductance            | 6400 | μmhos |
| Plate Current               | 9    | mA    |
| Grid Voltage (Approx.):     |      |       |
| For plate current of 100 μA | -6.5 | volts |
| For plate current of 10 μA  | —    | volts |

MAXIMUM CIRCUIT VALUE

|                         |     |        |
|-------------------------|-----|--------|
| Grid-Circuit Resistance | 0.5 | megohm |
|-------------------------|-----|--------|

\* Rating may be high as 300 volts under cutoff conditions, when tube is used as a cascode amplifier, the two units are connected in series, and heater is negative with respect to cathode.

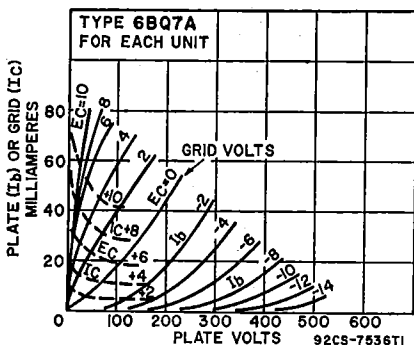

HALF-WAVE  
VACUUM RECTIFIER

6BR3/  
6RK19

17BR3/17RK19

Miniature type used as damper tube in horizontal-deflection circuits of television receivers. Outlines section, 7D; requires miniature 9-contact socket. Type 17BR3/17RK19 is identical with type 6BR3/6RK19 except for heater ratings.

|                        | 6BR3/<br>6RK19 | 17BR3/<br>17RK19 |         |
|------------------------|----------------|------------------|---------|
| Heater Voltage (ac/dc) | 6.3            | 16.8             | volts   |
| Heater Current         | 1.2            | 0.45             | ampere  |
| Heater Warm-up Time    | —              | 11               | seconds |

### Damper Service

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                     |      |                      |
|-------------------------------------|------|----------------------|
| Peak Inverse Plate Voltage#         | 5500 | volts                |
| Peak Plate Current                  | 1200 | mA                   |
| Average Plate Current               | 200  | mA                   |
| Plate Dissipation                   | 6.5  | watts                |
| Heater-Cathode Voltage:             |      |                      |
| Peak value                          | +300 | -5500                |
| Average value                       | +100 | -900                 |
| Bulb Temperature (At hottest point) | 180  | volts<br>volts<br>°C |

#### CHARACTERISTIC, Instantaneous Value

|  |    |       |
|--|----|-------|
| Tube Voltage Drop for plate current of 250 mA  | 19 | volts |
| # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds). |    |       |

#### 6BR8

Refer to chart at end of section.

### 6BR8A


### 6BR8A/

### 6FV8A

5BR8, 5BR8/5FV8

#### MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receiver applications. Especially useful as combined triode oscillator and pentode mixer in vhf television tuners. Outlines section, 6B; requires miniature 9-contact socket. Except for basing arrangement and grid-No.1-to-plate capacitance of pentode unit, types 5BR8, 5BR8/5FV8 and 6BR8A, 6BR8A/6FV8A are identical with types 5U8 and 6U8A, respectively.



9FA


#### 6BS3

Refer to chart at end of section.

### 6BS3A

12BS3A, 12BS3A/  
12DW4A, 17BS3A  
17BS3A/17DW4A

#### HALF-WAVE VACUUM RECTIFIER



9HP

Novar type used as damper tube in horizontal-deflection circuits of black-and-white television receivers. Outlines section, 30B; requires novar 9-contact socket. Socket terminals 1, 3, 6, and 8 should not be used as tie points; it is recommended that socket clips for these pins be removed to reduce the possibility of arc-over and to minimize leakage. These tubes, like other power-handling tubes, should be adequately ventilated. Types 12BS3A, 12BS3A/12DW4A, 17BS3A, and 17BS3A/17DW4A are identical with type 6BS3A except for heater ratings.

|   | 6BS3A | 12BS3A<br>12BS3A/<br>12DW4A | 17BS3A<br>17BS3A/<br>17DW4A |         |
|---|-------|-----------------------------|-----------------------------|---------|
| Heater Voltage (ac/dc)                        | 6.3   | 12.6                        | 16.8                        | volts   |
| Heater Current                                | 1.2   | 0.6                         | 0.45                        | amperes |
| Heater Warm-up Time (Average)                 | —     | 11                          | 11                          | seconds |
| Direct Interelectrode Capacitances (Approx.): |       |                             |                             |         |
| Plate to Cathode and Heater                   |       |                             | 6.5                         | pF      |
| Cathode to Plate and Heater                   |       |                             | 9                           | pF      |
| Heater to Cathode                             |       |                             | 2.8                         | pF      |



**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                |      |       |
|--------------------------------|------|-------|
| Peak Inverse Plate Voltage#    | 5000 | volts |
| Peak Plate Current             | 1100 | mA    |
| Average Plate Current          | 200  | mA    |
| Plate Dissipation              | 6    | watts |
| <b>Heater-Cathode Voltage:</b> |      |       |
| Peak value                     | +300 | -5000 |
| Average value                  | +100 | -900  |
|                                |      | volts |
|                                |      | volts |

**CHARACTERISTIC, Instantaneous Value**


|  |    |       |
|--|----|-------|
| Tube Voltage Drop for plate current of 140 mA  | 12 | volts |
| # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds). |    |       |

Refer to chart at end of section.  
For replacement use type 6BQ7A/6BZ7/6BS8.

**6BS8**

**6BU8**

3BU8/3GS8  
4BU8/4GS8



**9FG**

**SHARP-CUTOFF  
TWIN PENTODE**

Miniature type used as combined sync separator, sync clipper, and age amplifier tube in color and black-and-white television receivers. Outlines section, 6E; requires miniature 9-contact socket. Types 3BU8/3GS8 and 4BU8/4GS8 are identical with type 6BU8 except for heater ratings.

|  | 3BU8/3GS8 | 4BU8/4GS8 | 6BU8      |         |
|--|-----------|-----------|-----------|---------|
| Heater Voltage (ac/dc)                           | 3.15      | 4.2       | 6.3       | volts   |
| Heater Current                                   | 0.6       | 0.45      | 0.3       | ampere  |
| Heater Warm-up Time (Average)                    | 11        | 11        | —         | seconds |
| <b>Heater-Cathode Voltage:</b>                   |           |           |           |         |
| Peak value                                       | ±200 max  | ±200 max  | ±200 max  | volts   |
| Average value                                    | 100 max   | 100 max   | 100 max   | volts   |
| <b>Direct Interelectrode Capacitances:</b>       |           |           |           |         |
| Grid No.3 to Plate (Each Unit)                   |           |           | 1.9       | pF      |
| Grid No.1 to All Other Electrodes                |           |           | 6         | pF      |
| Grid No.3 to All Other Electrodes (Each Unit)    |           |           | 3.6       | pF      |
| Plate to All Other Electrodes (Each Unit)        |           |           | 3         | pF      |
| Grid No.3 of Unit No.1 to Grid No.3 of Unit No.2 |           |           | 0.015 max | pF      |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| Plate Voltage (Each Unit)                             | 300  | volts |
| Grid-No.3 (Suppressor-Grid) Voltage (Each Unit):      |      |       |
| Peak positive value                                   | 50   | volts |
| DC negative value                                     | 50   | volts |
| DC positive value                                     | 3    | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 150  | volts |
| Grid-No.1 (Control-Grid) Voltage, Negative bias value | 50   | volts |
| Cathode Current                                       | 12   | mA    |
| Plate Dissipation (Each Unit)                         | 1.1  | watts |
| Grid-No.2 Input                                       | 0.75 | watt  |

**CHARACTERISTICS (With Both Units Operating)**

|                               |      |      |       |
|-------------------------------|------|------|-------|
| Plate Voltage (Each Unit)     | 100  | 100  | volts |
| Grid-No.3 Voltage (Each Unit) | -10  | 0    | volts |
| Grid-No.2 Voltage             | 67.5 | 67.5 | volts |
| Grid-No.1 Voltage             | *    | *    | volts |
| Plate Current (Each Unit)     | —    | 2.2  | mA    |
| Grid-No.2 Current             | 6.5  | 3.3  | mA    |
| Cathode Current               | 6.6  | 7.8  | mA    |

**CHARACTERISTICS (With One Unit Operating)**

|                            |      |      |       |
|----------------------------|------|------|-------|
| Plate Voltage              | 100  | 100  | volts |
| Grid-No.3 Voltage          | 0    | 0    | volts |
| Grid-No.2 Voltage          | 67.5 | 67.5 | volts |
| Grid-No.1 Voltage          | 0    | *    | volts |
| Grid-No.3 Transconductance | —    | 180  | μmhos |
| Grid-No.1 Transconductance | 1500 | —    | μmhos |



|  |   |      |       |
|--|---|------|-------|
| Plate Current .....  | — | 2.2  | mA    |
| Grid-No.3 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | — | -4.5 | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | — | -2.3 | volts |

**MAXIMUM CIRCUIT VALUES**

|  |     |        |
|--|-----|--------|
| Grid-No.3-Circuit Resistance (Each Unit) ..... | 0.5 | megohm |
| Grid-No.1-Circuit Resistance .....             | 0.5 | megohm |

\* Adjusted to provide a dc grid-No.1 current of 100 microamperes.

† With plate and grid No.3 of the other unit connected to ground.

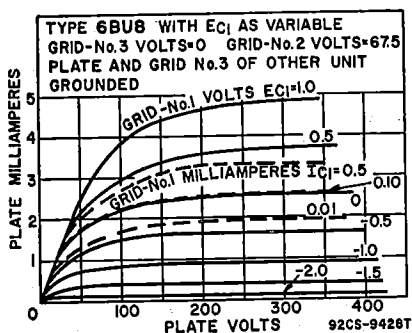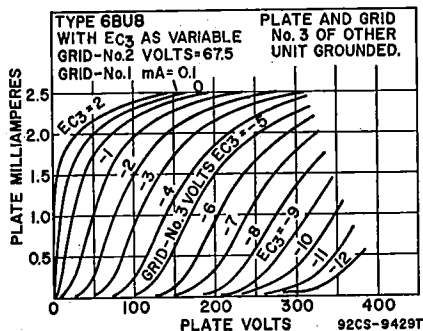**6BV8**


Refer to chart at end of section.

**6BV11**

12BV11

**SHARP-CUTOFF  
TWIN PENTODE**

Duodecar type used as color demodulators in color television applications. Grid Nos. 1 and 3 may be used as independent control electrodes. Outlines section, 8C; requires duodecar 12-contact socket. Type 12BV11 is identical with type 6BV11 except for heater ratings.

**12HB**

|   |              |                 |         |
|---|--------------|-----------------|---------|
| Heater Arrangement .....  | 6BV11 Series | 12BV11 Parallel |         |
| Heater Voltage (ac/dc) .....  | 6.3          | 12.6            | volts   |
| Heater Current .....  | 0.9          | 0.45            | ampere  |
| Heater Warm-up Time .....   | —            | 11              | seconds |
| Direct Interelectrode Capacitances:   |              |                 |         |
| Grid No.1 to Plate .....  |              | 0.1             | pF      |
| Grid No.3 to Plate .....  |              | 3.2             | pF      |
| Grid No.1 to Heater, Cathode, Grid No.2, Grid No.3, and Internal Shield ..... |              | 7               | pF      |
| Grid No.3 to All Other Electrodes .....                                       |              | 8.5             | pF      |
| Grid No.1 to Grid No.3 .....  |              | 0.08            | pF      |

**Class A<sub>1</sub> Amplifier (Each Unit)****MAXIMUM RATINGS (Design-Maximum Values)**

|  |                    |       |
|--|--------------------|-------|
| DC Plate Voltage .....                                 | 300                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage:                   |                    |       |
| Positive-bias value .....                              | 25                 | volts |
| Negative-bias value .....                              | 100                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....           | 300                | volts |
| Grid-No.2 Voltage .....                                | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:                      |                    |       |
| Positive-bias value .....                              | 0                  | volt  |
| Negative-bias value .....                              | 50                 | volts |
| Plate Dissipation .....                                | 1.7                | watts |
| Grid-No.3 Input .....                                  | 0.1                | watt  |
| Grid-No.2 Input:                                       |                    |       |
| For grid-No.2 voltages up to 150 volts .....           | 1                  | watt  |
| For grid-No.2 voltages between 150 and 300 volts ..... | See curve page 300 |       |

**CHARACTERISTICS**

|   |      |            |
|---|------|------------|
| Plate Supply Voltage .....  | 150  | volts      |
| Grid-No.3 Voltage .....   | 0    | volt       |
| Grid-No.2 Supply Voltage .....                                    | 100  | volts      |
| Cathode Resistor .....  | 180  | ohms       |
| Plate Current .....   | 3.1  | mA         |
| Grid-No.2 Current .....   | 2.4  | mA         |
| Transconductance, Grid No.1 .....                                 | 3200 | $\mu$ mhos |
| Transconductance, Grid No.3 .....                                 | 390  | $\mu$ mhos |
| Plate Resistance (Approx.) .....                                  | 0.17 | megohm     |
| Grid-No.1 Voltage (Approx.) for plate current of 75 $\mu$ A ..... | -3.5 | volts      |
| Grid-No.3 Voltage (Approx.) for plate current of 85 $\mu$ A ..... | -5.5 | volts      |
| Amplification Factor .....  | 67   |            |

**MAXIMUM CIRCUIT VALUES**

|                                    |      |        |
|------------------------------------|------|--------|
| Grid-No.3-Circuit Resistance ..... | 0.68 | megohm |
| Grid-No.1-Circuit Resistance:      |      |        |
| For fixed-bias operation .....     | 0.22 | megohm |
| For cathode-bias operation .....   | 0.47 | megohm |

For replacement use type 6CG3/6BW3/6DQ3.


**6BW3**

Refer to chart at end of section.

**6BW4**

Refer to chart at end of section.

**6BW8**



**12HD**

**SHARP-CUTOFF  
DUAL PENTODE**

**6BW11**

Duodecator type used in color and black-and-white television receiver applications. Unit No. 1 is used as a video amplifier; unit No. 2 is used in bandpass amplifier, burst amplifier, or sound-if or video-if applications. Outlines section, 8B; requires duodecator 12-contact socket. Heater: volts (ac/dc), 6.3; amperes, 0.8; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**Class A<sub>1</sub> Amplifier**

| MAXIMUM RATINGS (Design-Maximum Values)                     | Unit No.1          | Unit No.2 |       |
|---|--------------------|-----------|-------|
| Plate Voltage .....   | 330                | 330       | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 330                | 330       | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |           |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | 0         | volts |
| Plate Dissipation .....                                     | 4                  | 3.1       | watts |
| Grid-No.2 Dissipation .....                                 | 0.8                | 0.65      | watt  |

**CHARACTERISTICS**

|   |                                |       |            |
|---|--------------------------------|-------|------------|
| Plate Voltage .....   | 125                            | 125   | volts      |
| Grid No.3 (Suppressor Grid) .....                                 | Connected to cathode at socket |       |            |
| Grid-No.2 Voltage .....   | 125                            | 125   | volts      |
| Cathode-Bias Resistor .....                                       | 56                             | 56    | ohms       |
| Plate Resistance (Approx.) .....                                  | 0.12                           | 0.2   | megohm     |
| Transconductance .....  | 8500                           | 13000 | $\mu$ mhos |
| Plate Current .....   | 22                             | 11    | mA         |
| Grid-No.2 Current .....   | 4.8                            | 3.8   | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A ..... | -9.5                           | -3    | volts      |

**MAXIMUM CIRCUIT VALUES**

|                                  |      |      |        |
|----------------------------------|------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |      |        |
| For cathode-bias operation ..... | 0.25 | 0.25 | megohm |

Refer to chart at end of section.


**6BX7GT**

Refer to chart at end of section.

**6BY5GA**

# 6BY6 PENTAGRID AMPLIFIER

Miniature type used as a gated amplifier in color television receivers. In such service, it may be used as a combined sync separator and sync clipper. Outlines section, 5C; requires miniature 7-contact socket.



7CH

|  | 6BY6     |         |
|--|----------|---------|
| Heater Voltage (ac/dc)                     | 6.3      | volts   |
| Heater Current                             | 0.3      | ampere  |
| Heater Warm-up Time (Average)              | —        | seconds |
| Peak value                                 | ±200 max | volts   |
| Average value                              | 100 max  | volts   |
| <b>Direct Interelectrode Capacitances:</b> |          |         |
| Grid No.1 to Plate                         | 0.08 max | pF      |
| Grid No.3 to Plate                         | 0.35 max | pF      |
| Grid No.1 to Grid No.3                     | 0.22 max | pF      |
| Grid No. 1 to All Other Electrodes         | 5.4      | pF      |
| Grid No.3 to All Other Electrodes          | 6.9      | pF      |
| Plate to All Other Electrodes              | 7.6      | pF      |

## Class A<sub>1</sub> Amplifier

### CHARACTERISTICS

|   |      |       |
|---|------|-------|
| Plate Voltage   | 250  | volts |
| Grids-No.2-and-No.4 Voltage   | 100  | volts |
| Grid-No.3 Voltage   | —2.5 | volts |
| Grid-No.1 Voltage   | —2.5 | volts |
| Grid-No.3-to-Plate Transconductance   | 500  | μmhos |
| Grid-No.1-to-Plate Transconductance   | 1900 | μmhos |
| Plate Current   | 6.5  | mA    |
| Grids-No.2-and-No.4 Current   | 9    | mA    |
| Grid-No.3 Volts (Approx.) for plate current of 35 μA and grid-No.1 volts = —4 | —15  | volts |
| Grid-No.1 Volts (Approx.) for plate current of 35 μA and grid-No.3 volts = 0  | —12  | volts |

## Gated Amplifier

### MAXIMUM RATINGS (Design-Maximum Values)



|  |                    |       |
|--|--------------------|-------|
| Plate Voltage  | 330                | volts |
| Grids-No.2-and-No.4 Voltage                                | See curve page 300 | volts |
| Grids-No.2-and-No.4 Supply Voltage                         | 330                | volts |
| Grid-No.3 Voltage:   |                    |       |
| Negative-bias value  | 55                 | volts |
| Positive-bias value  | 0                  | volts |
| Positive peak value  | 27                 | volts |
| Grid-No.1 Voltage, Negative bias value                     | 110                | volts |
| Plate Dissipation  | 2.3                | watts |
| Grid-No.3 Input  | 0.1                | watt  |
| Grids-No.2-and-No.4 Input:                                 |                    |       |
| For grids-No.2-and-No.4 voltages up to 165 volts           | 1.1                | watts |
| For grids-No.2-and-No.4 voltages between 165 and 330 volts | See curve page 300 | watts |
| Grid-No.1 Input  | 0.1                | watt  |

### CHARACTERISTICS AS SYNC SEPARATOR AND SYNC CLIPPER

|  |      |       |
|--|------|-------|
| Plate Voltage  | 10   | volts |
| Grid-No.3 Voltage  | 0    | volts |
| Grids-No.2-and-No.4 Voltage  | 25   | volts |
| Grid-No.1 Voltage  | 0    | volts |
| Plate Current  | 1.4  | mA    |
| Grids-No.2-and-No.4 Current  | 3.5  | mA    |
| Grid-No.3 Volts (Approx.) for plate voltage of 25 volts, grids-No.2-and-No.4 voltage of 25 volts, grid-No.1 voltage of 0 volts, and plate current of 50 μA | —2.5 | volts |
| Grid-No.1 Volts (Approx.) for plate voltage of 25 volts, grids-No.2-and-No.4 voltage of 25 volts, grid-No.3 voltage of 0 volts, and plate current of 50 μA | —2.3 | volts |

### MAXIMUM CIRCUIT VALUES

|  |     |        |
|--|-----|--------|
| Grid-No.1 or Grid-No.3-Circuit Resistance: |     |        |
| For fixed-bias operation                   | 0.5 | megohm |
| For cathode-bias operation                 | 1   | megohm |

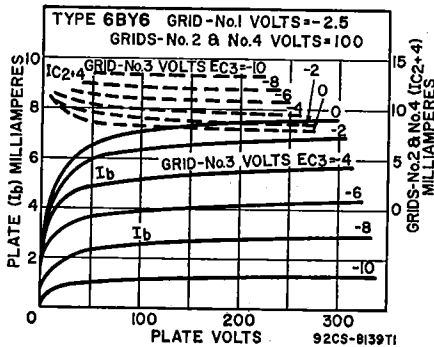

9FN

### DIODE— SHARP-CUTOFF PENTODE 6BY8

Miniature type used in television receiver applications. The pentode unit is used as an rf amplifier and the high-perveance diode as a limiter or detector. Outlines section, 6E; requires miniature 9-contact socket.

|   |            |         |
|---|------------|---------|
| Heater Voltage (ac/dc)  | 6.3        | volts   |
| Heater Current  | 0.6        | ampere  |
| Heater Warm-up Time (Average)   | 11         | seconds |
| Heater-Cathode Voltage:   |            |         |
| Peak value  | ±200 max   | volts   |
| Average value   | 100 max    | volts   |
| Direct Interelectrode Capacitances:°  |            |         |
| Pentode Unit:   |            |         |
| Grid No.1 to Plate  | 0.0035 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield               | 5.5        | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield                   | 5          | pF      |
| Diode Plate to All Other Electrodes   | 4.8*       | pF      |
| ° With external shield connected to cathode of pentode unit (pin 9), except as noted. |            |         |
| ▪ With external shield connected to ground.   |            |         |

#### Pentode Unit as Class A<sub>1</sub> Amplifier

##### MAXIMUM RATINGS (Design-Center Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage                                       | 300                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value | 0                  | volts |
| Grid-No.2 (Screen Grid) Supply Voltage              | 300                | volts |
| Grid-No.2 Voltage                                   | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:                   |                    |       |
| Negative-bias value                                 | 50                 | volts |
| Positive-bias value                                 | 0                  | volts |
| Plate Dissipation                                   | 3                  | watts |
| Grid-No.2 Input:                                    |                    |       |
| For grid-No.2 voltages up to 150 volts              | 0.65               | watt  |
| For grid-No.2 voltages between 150 and 300 volts    | See curve page 300 |       |

##### CHARACTERISTICS

|  |                                |      |        |
|--|--------------------------------|------|--------|
| Plate Supply Voltage                                   | 100                            | 250  | volts  |
| Grid No.3  | Connected to cathode at socket |      |        |
| Grid-No.2 Supply Voltage                               | 100                            | 150  | volts  |
| Cathode-Bias Resistor                                  | 150                            | 68   | ohms   |
| Plate Resistance (Approx.)                             | 0.5                            | 1    | megohm |
| Transconductance                                       | 3900                           | 5200 | μmhos  |
| Plate Current  | 5                              | 10.6 | mA     |
| Grid-No.2 Current                                      | 2.1                            | 4.3  | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | -4.2                           | -6.5 | volts  |

##### MAXIMUM CIRCUIT VALUES

|                               |      |        |
|-------------------------------|------|--------|
| Grid-No.1-Circuit Resistance: |      |        |
| For fixed-bias operation      | 0.25 | megohm |
| For cathode-bias operation    | 1    | megohm |

## Diode Unit

## MAXIMUM RATINGS (Design-Center Values)

|                                  |     |       |
|----------------------------------|-----|-------|
| Peak Inverse Plate Voltage ..... | 430 | volts |
| Peak Plate Current .....         | 180 | mA    |
| Average Plate Current .....      | 45  | mA    |

6BY11

Refer to chart at end of section.

6BZ3

For replacement use type 6BE3/6BZ3.

## 6BZ6

3BZ6, 4BZ6, 12BZ6

SEMIREMOTE-CUTOFF  
PENTODE

Miniature type used in gain-controlled video if stages of color and black-and-white television receivers. Outlines section, 5C; requires miniature 7-contact socket. Types 3BZ6, 4BZ6, and 12BZ6 are identical with type 6BZ6 except for heater ratings.


|   | 3BZ6     | 4BZ6     | 6BZ6       | 12BZ6     |         |
|---|----------|----------|------------|-----------|---------|
| Heater Voltage (ac/dc) .....  | 3.15     | 4.2      | 6.3        | 12.6      | volts   |
| Heater Current .....  | 0.6      | 0.45     | 0.3        | 0.15      | ampere  |
| Heater Warm-up Time (Average) .....   | 11       | 11       | —          | —         | seconds |
| Heater-Cathode Voltage:   |          |          |            |           |         |
| Peak value .....  | ±200 max | ±200 max | ±200 max   | ±200 max  | volts   |
| Average value .....   | 100 max  | 100 max  | 100 max    | 100 max   | volts   |
| Direct Interelectrode Capacitances:   |          |          | Unshielded | Shielded  |         |
| Grid No.1 to Plate .....  |          |          | 0.025 max  | 0.015 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... |          |          | 7          | 7         | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     |          |          | 2          | 3         | pF      |

▲ With external shield connected to cathode.


Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid No.3 (Suppressor-Grid) Voltage, Positive value .....   | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 2.3                | watts |
| Grid-No.2 input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 0.55               | watt  |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |



7CM

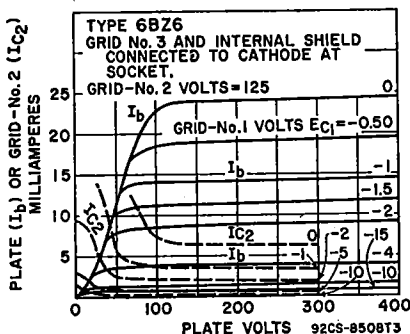

**CHARACTERISTICS**

|   |                                |            |
|---|--------------------------------|------------|
| Plate Supply Voltage .....  | 125                            | volts      |
| Grid No.3 .....   | Connected to cathode at socket |            |
| Grid-No.2 Supply Voltage .....  | 125                            | volts      |
| Cathode-Bias Resistor .....   | 56                             | ohms       |
| Plate Resistance (Approx.) .....                                      | 0.26                           | megohm     |
| Transconductance .....  | 8000                           | $\mu$ mhos |
| Plate Current .....   | 14                             | mA         |
| Grid-No.2 Current .....   | 3.6                            | mA         |
| Grid-No.1 Voltage (Approx.) for transconductance of 50 $\mu$ mhos ..  | -19                            | volts      |
| Grid-No.1 Voltage (Approx.) for transconductance of 700 $\mu$ mhos .. | -4.5                           | volts      |

**MAXIMUM CIRCUIT VALUES**

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 1    | megohm |

Refer to chart at end of section.

For replacement use type 6BQ7A/6BZ7/6BS8.

**6BZ7**


Refer to chart at end of section.

For replacement use type 6BC8/6BZ8.

**6BZ8**

**POWER TRIODE**

**6C4**



Miniature type used as a cascode amplifier in vhf color local oscillator in FM and other high-frequency circuits and as a class C rf amplifier. Outlines section, 5C; requires miniature 7-contact socket. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section. For additional curve of plate characteristics, refer to type 12AU7A.

**6BG**

|  |               |                       |
|--|---------------|-----------------------|
| Heater Voltage (ac/dc) .....                 | 6.3           | volts                 |
| Heater Current .....                         | 0.15          | ampere                |
| Heater-Cathode Voltage:                      |               |                       |
| Peak value .....                             | $\pm$ 200 max | volts                 |
| Average value .....                          | 100 max       | volts                 |
| Direct Interelectrode Capacitances (Approx.) | Unshielded    | Shielded <sup>Δ</sup> |
| Grid to Plate .....                          | 1.6           | 1.4                   |
| Grid to Cathode and Heater .....             | 1.8           | 1.8                   |
| Plate to Cathode and Heater .....            | 1.3           | 2.5                   |

<sup>Δ</sup> With external shield connected to cathode.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**

|                         |         |       |
|-------------------------|---------|-------|
| Plate Voltage .....     | 300 max | volts |
| Plate Dissipation ..... | 3.5 max | watts |

**CHARACTERISTICS**

|   |      |      |            |
|---|------|------|------------|
| Plate Voltage .....                                       | 100  | 250  | volts      |
| Grid Voltage* .....                                       | 0    | -8.5 | volts      |
| Amplification Factor .....                                | 19.5 | 17   |            |
| Plate Resistance (Approx.) .....                          | 6250 | 7700 | ohms       |
| Transconductance .....                                    | 3100 | 2200 | $\mu$ mhos |
| Plate Current .....                                       | 11.8 | 10.5 | mA         |
| Grid Voltage (Approx.) for plate current of 10 $\mu$ A .. | -10  | -25  | volts      |

**MAXIMUM CIRCUIT VALUES**

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-Circuit Resistance:         |      |        |
| For fixed bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 1    | megohm |

\* Transformer- or impedance-type input coupling devices are recommended to minimize resistance in the grid circuit.

**RF Power Amplifier and Oscillator—Class C Telegraphy**


**MAXIMUM RATINGS (Design-Center Values)**

|                         |     |       |
|-------------------------|-----|-------|
| Plate Voltage .....     | 300 | volts |
| Grid Voltage .....      | -50 | volts |
| Plate Current .....     | 25  | mA    |
| Grid Current .....      | 5   | watts |
| Plate Dissipation ..... | 8   | mA    |

## TYPICAL OPERATION AT FREQUENCIES UP TO 50 MHz

|                               |      |       |
|-------------------------------|------|-------|
| Plate Voltage .....           | 300  | volts |
| Grid Voltage .....            | -27  | volts |
| Plate Current .....           | 25   | mA    |
| Grid Current (Approx.) .....  | 7    | mA    |
| Driving Power (Approx.) ..... | 0.35 | watt  |
| Power Output (Approx.) .....  | 5.5  | watts |

\* Approximately 2.5 watts power output can be obtained when the 6C4 is used at 150 MHz as an oscillator with grid resistor of 10,000 ohms and with maximum rated input.

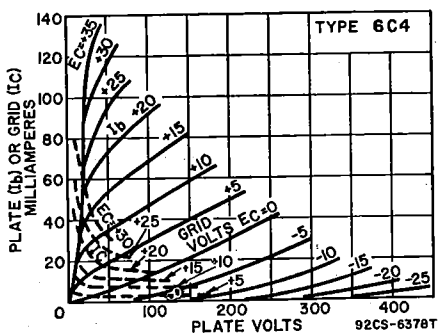

**6C5** Refer to chart at end of section.

**6C5GT** Refer to chart at end of section.

**6C6** Refer to chart at end of section.

**6C7** Refer to chart at end of section.


**6C8G** Refer to chart at end of section.

**6C9**

17C9

**SHARP-CUTOFF  
DUAL TETRODE**

Miniature type used as vhf rf-amplifier and autodyne mixer tube. Outlines section, 6B; except center pin is added to base; requires miniature 10-contact socket. Type 17C9 is identical with type 6C9 except for heater ratings.



|  |            |            |        |
|--|------------|------------|--------|
| Heater Voltage (ac/dc) .....                                       | 6C9        | 17C9       |        |
| Heater Current .....   | 6.3        | 16.8       | volts  |
| Peak Heater-Cathode Voltage .....                                  | 0.4        | 0.15       | ampere |
| Direct Interelectrode Capacitances:                                | ±100 max   | ±100 max   | volts  |
| Grid No.1 to Plate .....   | Unit No. 1 | Unit No. 2 | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Internal Shield ..... | 0.055 max  | 0.06 max   |        |
| Plate to Cathode, Heater, Grid No.2 and Internal Shield .....      | 4.4        | 4.2        | pF     |
| Heater to Cathode .....  | 2.2        | 2.2        | pF     |
| Plate of Unit No.1 to Plate of Unit No.2 .....                     | 4.2        | 4.8        | pF     |
| Grid No.1 of Unit No.1 to Grid No.1 of Unit No.2 .....             |            | 0.003 max  | pF     |
| Grid No.1 of Unit No.1 to Plate of Unit No.2 .....                 |            | 0.001 max  | pF     |
| Grid No.1 of Unit No.2 to Plate of Unit No.1 .....                 |            | 0.001 max  | pF     |
|  |            | 0.032 max  | pF     |



**Class A<sub>1</sub> Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Maximum Values)**


|   |                    |       |
|---|--------------------|-------|
| Plate Voltage                                   | 250                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage          | 180                | volts |
| Grid-No.2 Voltage                               | See curve page 300 |       |
| Cathode Current                                 | 20                 | mA    |
| Plate Dissipation:                              |                    |       |
| Either plate                                    | 1.5                | watts |
| Both plates (both units operating)              | 2.5                | watts |
| Grid-No.2 Input:                                |                    |       |
| For grid-No.2 voltages up to 90 volts           | 0.5                | watt  |
| For grid-No.2 voltages between 90 and 180 volts | See curve page 300 |       |

**CHARACTERISTICS**

|   |      |            |
|---|------|------------|
| Plate Voltage   | 125  | volts      |
| Grid-No.2 Voltage   | 80   | volts      |
| Grid-No.1 Voltage   | -1   | volt       |
| Plate Resistance (Approx.)                                  | 0.1  | megohm     |
| Transconductance  | 8000 | $\mu$ mhos |
| Plate Current   | 10   | mA         |
| Grid-No.2 Current   | 1.5  | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A | -6   | volts      |

Refer to chart at end of section.

**6C10**



**9M**

**FULL-WAVE VACUUM RECTIFIER**


**6CA4**

Miniature type used in power supply of compact audio equipment having moderate dc requirements. Outlines section, 6G; requires miniature 9-contact socket. This tube, like other power-handling tubes, should be adequately ventilated. **Heater:** volts (ac/dc), 6.3; amperes, 1.

**Full-Wave Rectifier**

**MAXIMUM RATINGS (Design-Center Values)**

|   |      |       |
|---|------|-------|
| Peak Inverse Plate Voltage  | 1000 | volts |
| Peak Plate Current (Per Plate)  | 450  | mA    |
| AC Plate Supply Voltage (Per Plate, rms) with Capacitor Input to Filter | 350  | volts |
| Average Output Current  | 150  | mA    |
| Hot Switching Transient Plate Current (Per Plate)                       | #    |       |
| Peak Heater-Cathode Voltage   | -500 | volts |

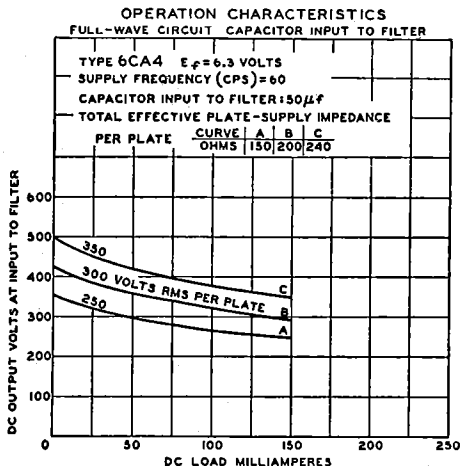

## TYPICAL OPERATION WITH CAPACITOR INPUT TO FILTER

|  |     |     |     |         |
|--|-----|-----|-----|---------|
| AC Plate-to-Plate Supply Voltage (rms)         | 500 | 600 | 700 | volts   |
| Filter-Input Capacitor                         | 50  | 50  | 50  | $\mu$ F |
| Total Effective Plate Supply Impedance         |     |     |     |         |
| per Plate                                      | 150 | 200 | 240 | ohms    |
| DC Output Voltage at Input to Filter (Approx.) |     |     |     |         |
| For dc output current of 150 mA                | 245 | 293 | 347 | volts   |


# When capacitor-input circuits are used, a maximum peak current value per plate of 1 ampere during the initial cycles of the hot-switching transient should not be exceeded.

## 6CA5

12CA5

## BEAM POWER TUBE

Miniature type used in af power output stage of radio and television receivers. Outlines section, 5D; requires miniature 7-contact socket. Type 12CA5 is identical with type 6CA5 except for heater ratings.



|                               | 6CA5          | 12CA5         |         |
|-------------------------------|---------------|---------------|---------|
| Heater Voltage (ac/dc)        | 6.3           | 12.6          | volts   |
| Heater Current                | 1.2           | 0.6           | amperes |
| Heater Warm-up Time (Average) | —             | 11            | seconds |
| Heater-Cathode Voltage:       |               |               |         |
| Peak value                    | $\pm 200$ max | +200 —300 max | volts   |
| Average value                 | 100 max       | +100 —200 max | volts   |

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Center Values)

|   |     |              |
|---|-----|--------------|
| Plate Voltage   | 130 | volts        |
| Grid-No.2 (Screen-Grid) Voltage                       | 130 | volts        |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0   | volts        |
| Plate Dissipation                                     | 5   | watts        |
| Grid-No.2 Input                                       | 1.4 | watts        |
| Bulb Temperature (At hottest point)                   | 180 | $^{\circ}$ C |

## TYPICAL OPERATION

|  |       |       |            |
|--|-------|-------|------------|
| Plate Voltage                              | 110   | 125   | volts      |
| Grid-No.2 Voltage                          | 110   | 125   | volts      |
| Grid-No.1 (Control-Grid) Voltage           | -4    | -4.5  | volts      |
| Peak AF Grid-No.1 Voltage                  | 4     | 4.5   | volts      |
| Zero-Signal Plate Current                  | 32    | 37    | mA         |
| Maximum-Signal Plate Current               | 31    | 36    | mA         |
| Zero-Signal Grid-No.2 Current (Approx.)    | 3.5   | 4     | mA         |
| Maximum-Signal Grid-No.2 Current (Approx.) | 7.5   | 11    | mA         |
| Plate Resistance (Approx.)                 | 16000 | 15000 | ohms       |
| Transconductance                           | 8100  | 9200  | $\mu$ mhos |
| Load Resistance                            | 3500  | 4500  | ohms       |
| Total Harmonic Distortion                  | 6     | 6     | per cent   |
| Maximum-Signal Power Output                | 1.1   | 1.5   | watts      |

## MAXIMUM CIRCUIT VALUES

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |


## 6CA7

Refer to chart at end of section.

6CA7/  
EL34

## POWER PENTODE

Glass octal types used in the output stage of audio-frequency amplifiers. Maximum dimensions: over-all length,  $4\frac{7}{16}$  inches; seated height,  $3\frac{3}{8}$  inches; diameter,  $1\frac{1}{2}$  inches. Tube requires octal socket.



|                             |               |         |
|-----------------------------|---------------|---------|
| Heater Voltage (ac/dc)      | 6.3           | volts   |
| Heater Current              | 1.5           | amperes |
| Peak Heater-Cathode Voltage | $\pm 200$ max | volts   |

Direct Interelectrode Capacitances:

|  |      |    |
|--|------|----|
| Grid No.1 to Plate .....                                     | 1    | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 15.5 | pF |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 7.2  | pF |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**

|                                       |     |       |
|---------------------------------------|-----|-------|
| Plate Voltage .....                   | 800 | volts |
| Grid-No.2 (Screen-Grid) Voltage ..... | 425 | volts |
| Grid-No.2 Input .....                 | 8   | watts |
| Cathode Current .....                 | 150 | mA    |
| Plate Dissipation .....               | 25  | watts |

**TYPICAL OPERATION**

|  |       |          |
|--|-------|----------|
| Plate Voltage .....                    | 265   | volts    |
| Grid-No.2 Voltage .....                | 250   | volts    |
| Grid-No.1 (Control-Grid) Voltage ..... | -13.5 | volts    |
| Peak AF Grid-No.1 Voltage .....        | 12.3  | volts    |
| Zero-Signal Plate Current .....        | 100   | mA       |
| Zero-Signal Grid-No.2 Current .....    | 15    | mA       |
| Transconductance .....                 | 11000 | μmhos    |
| Plate Resistance .....                 | 15000 | ohms     |
| Load Resistance .....                  | 2000  | ohms     |
| Maximum-Signal Power Output .....      | 11    | watts    |
| Total Harmonic Distortion .....        | 10    | per cent |

**MAXIMUM CIRCUIT VALUE**

|  |     |        |
|--|-----|--------|
| Grid-No.1-Circuit Resistance, for cathode-bias operation ..... | 0.7 | megohm |
|--|-----|--------|

**Push-Pull Class AB<sub>1</sub> Amplifier**


**MAXIMUM RATINGS (Same as for Class A<sub>1</sub> Amplifier)**

**TYPICAL OPERATION (Values are for two tubes)**

|  |      |          |
|--|------|----------|
| Plate Supply Voltage .....                       | 450  | volts    |
| Grid-No.2 Supply Voltage .....                   | 450  | volts    |
| Cathode-Bias Resistor .....                      | 232  | ohms     |
| Grid-No.2 Resistor .....                         | 1000 | ohms     |
| Peak AF Grid-No.1 to Grid-No.1 Voltage .....     | 38.2 | volts    |
| Zero-Signal Plate Current .....                  | 120  | mA       |
| Maximum-Signal Plate Current .....               | 143  | mA       |
| Zero-Signal Grid-No.2 Current .....              | 20   | mA       |
| Maximum-Signal Grid-No.2 Current .....           | 44   | mA       |
| Effective Load Resistance (Plate-to-plate) ..... | 6500 | ohms     |
| Total Harmonic Distortion .....                  | 5.1  | per cent |
| Maximum-Signal Power Output .....                | 40   | watts    |

Refer to chart at end of section.

**6CB5**



**8GD**

**BEAM POWER TUBE**

**6CB5A**

Glass octal type used as horizontal-deflection amplifier in color and black-and-white television receivers. Outlines section, 21B; requires octal socket.

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | volts   |
| Heater Current .....   | 2.5      | amperes |
| Heater-Cathode Voltage:                                      |          |         |
| Peak value .....   | ±200 max | volts   |
| Average value .....  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):                |          |         |
| Grid No.1 to Plate .....                                     | 0.4      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 22       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 10       | pF      |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|                         |     |     |       |
|-------------------------|-----|-----|-------|
| Plate Voltage .....     | 75  | 175 | volts |
| Grid-No.2 Voltage ..... | 150 | 175 | volts |
| Grid-No.1 Voltage ..... | 0   | -30 | volts |

|   |      |      |       |
|---|------|------|-------|
| Mu-Factor, Grid No.2 to Grid No.1 .....                     | —    | 3.8  |       |
| Plate Resistance (Approx.) .....                            | —    | 5000 | ohms  |
| Transconductance .....                                      | —    | 8800 | μmhos |
| Plate Current .....   | 460● | 90   | mA    |
| Grid-No.2 Current .....                                     | 42●  | 6    | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA ..... | —    | -60  | volts |

● These values can be measured by a method involving a recurrent waveform such that the maximum rating of the tube will not be exceeded.

### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |      |       |
|---|------|-------|
| DC Plate Voltage .....                      | 880  | volts |
| Peak Positive-Pulse Plate Voltage# .....    | 6800 | volts |
| Peak Negative-Pulse Plate Voltage .....     | 1650 | volts |
| DC Grid-No.2 (Screen-Grid) Voltage .....    | 220  | volts |
| DC Grid-No.1 (Control-Grid) Voltage .....   | -55  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 220  | volts |
| Peak Cathode Current .....                  | 860  | mA    |
| Average Cathode Current .....               | 240  | mA    |
| Grid-No.2 Input .....                       | 4    | watts |
| Plate Dissipation† .....                    | 26   | watts |
| Bulb Temperature (At hottest point) .....   | 220  | °C    |

#### MAXIMUM CIRCUIT VALUE

|                                    |      |        |
|------------------------------------|------|--------|
| Grid-No.1-Circuit Resistance ..... | 0.47 | megohm |
|------------------------------------|------|--------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).


† A bias resistor or other means is required to protect the tube in absence of excitation.

6CB6

Refer to chart at end of section.

**6CB6A**  
**6CB6A/**  
**6CF6**

### SHARP-CUTOFF PENTODE



7CM

#### 3CB6, 3CB6/3CF6, 4CB6

Miniature types used in color and black-and-white television receivers as if amplifier at frequencies up to about 45 MHz and as rf amplifiers in vhf television tuners. Outlines section, 5C; requires miniature 7-contact socket. For typical operation as resistance-coupled amplifiers, refer to Resistance-Coupled Amplifier section. Types 3CB6, 3CB6/3CF6, and 4CB6 are identical with type 6CB6A except for heater ratings.

|  | 3CB6<br>3CB6/3CF6      | 4CB6                   | 6CB6A<br>6CB6A/6CF6   |         |
|--|------------------------|------------------------|-----------------------|---------|
| Heater Voltage (ac/dc) .....   | 3.15                   | 4.2                    | 6.3                   | volts   |
| Heater Current .....   | 0.6                    | 0.45                   | 0.3                   | ampere  |
| Heater Warm-up Time (Average) .....  | 11                     | 11                     | 11                    | seconds |
| Heater-Cathode Voltage:  |                        |                        |                       |         |
| Peak value .....   | { +200 max<br>-300 max | { +200 max<br>-300 max | { ±200 max<br>100 max | volts   |
| Average value .....  | 100 max                | { +100 max<br>-200 max |                       | volts   |
| Direct Interelectrode Capacitances:  |                        | Unshielded             | Shielded <sup>A</sup> |         |
| Grid No.1 to Plate .....   |                        | 0.025 max              | 0.015 max             | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2,<br>Grid No.3, and Internal Shield ..... |                        | 6.5                    | 6.5                   | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield .....     |                        | 2                      | 3                     | pF      |

<sup>A</sup> With external shield connected to cathode.

### Class A<sub>1</sub> Amplifier


#### MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....                                       | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value ..... | 0                  | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                     | See curve page 300 |       |

|   |                    |       |
|---|--------------------|-------|
| Grid-No.2 Supply Voltage .....                              | 330                | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 2.3                | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 0.55               | watt  |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

**CHARACTERISTICS**

|   |                                |            |
|---|--------------------------------|------------|
| Plate Supply Voltage .....  | 125                            | volts      |
| Grid No.3 .....   | Connected to cathode at socket |            |
| Grid-No.2 Supply Voltage .....                                    | 125                            | volts      |
| Cathode-Bias Resistor .....                                       | 56                             | ohms       |
| Plate Resistance (Approx.) .....                                  | 0.28                           | megohm     |
| Transconductance .....  | 8000                           | $\mu$ mhos |
| Plate Current .....   | 13                             | mA         |
| Grid-No.2 Current .....   | 3.7                            | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A ..... | -6.5                           | volts      |
| Grid-No.1 Voltage (Approx.) for plate current of 2.8 mA .....     | -3                             | volts      |

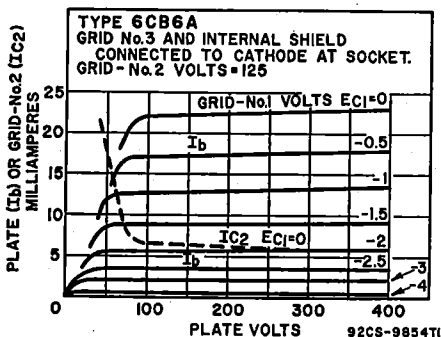

For replacement use type 6CE3/6CD3/6DT3.

Refer to chart at end of section.

**6CD3**


**6CD6G**

**6CD6GA**

25CD6GB

**BEAM POWER TUBE**

Glass octal type used as horizontal-deflection amplifier in high-efficiency deflection circuits of color and black-and-white television receivers. Outlines section, 21B; requires octal socket. This type may be supplied with pins 1, 4, and 6 omitted. Vertical tube mounting is preferred, but horizontal operation is permissible if pins No.2 and 7 are in vertical plane. Type 25CD6GB is identical with type 6CD6GA except for heater ratings.



|  | 6CD6GA        | 25CD6GB       |         |
|--|---------------|---------------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3           | 25            | volts   |
| Heater Current .....   | 2.5           | 0.6           | amperes |
| Heater Warm-up Time (Average) .....                          | —             | 11            | seconds |
| Heater-Cathode Voltage:                                      |               |               |         |
| Peak value .....   | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....  | 100 max       | 100 max       | volts   |
| Direct Interelectrode Capacitances (Approx.):                |               |               |         |
| Grid No.1 to Plate .....                                     |               | 1.1           | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |               | 22            | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |               | 8.5           | pF      |

**Class A<sub>1</sub> Amplifier**

| <b>CHARACTERISTICS</b>                  |     |     |       |
|---|-----|-----|-------|
| Plate Voltage .....                     | 60  | 175 | volts |
| Grid-No.2 (Screen-Grid) Voltage .....   | 100 | 175 | volts |
| Grid-No.1 (Control-Grid) Voltage .....  | 0   | -30 | volts |
| Mu-Factor, Grid No.2 to Grid No.1 ..... | —   | 3.9 |       |

|   |      |      |       |
|---|------|------|-------|
| Plate Resistance (Approx.) .....                            | —    | 7200 | ohms  |
| Transconductance .....                                      | —    | 7700 | μmhos |
| Plate Current .....   | 230* | 5.5  | mA    |
| Grid-No.2 Current .....                                     | 21*  | 5.5  | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA ..... | —    | —55  | volts |

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Center Values)



|   |       |       |
|---|-------|-------|
| DC Plate Voltage .....                                      | 700   | volts |
| Peak Positive-Pulse Plate Voltage# (Absolute Maximum) ..... | 7000* | volts |
| Peak Negative-Pulse Plate Voltage .....                     | 1500  | volts |
| DC Grid-No.2 (Screen-Grid) Voltage .....                    | 175   | volts |
| Peak Negative-Pulse Grid-No.1 Voltage .....                 | 700   | volts |
| Peak Cathode Current .....                                  | 200   | mA    |
| Average Cathode Current .....                               | —200  | mA    |
| Plate Dissipation† .....                                    | 20    | watts |
| Grid-No.2 Input .....                                       | 3     | watts |
| Bulb Temperature (At hottest point) .....                   | 225   | °C    |

#### MAXIMUM CIRCUIT VALUE

Grid-No.-Circuit Resistance, for grid-resistor-bias operation ..... 0.47 megohm

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).  
 \* Under no circumstances should this absolute value be exceeded.

† A bias resistor or other means is required to protect the tube in absence of excitation.

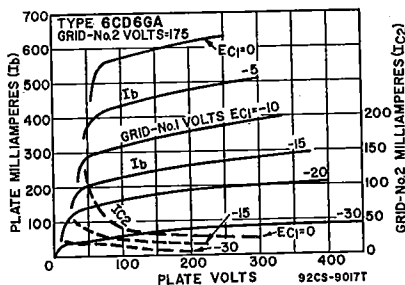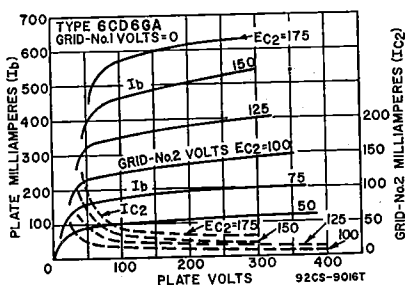

6CE3


Refer to chart at end of section.  
 For replacement use type 6CE3/6CD3/6DT3.

**6CE3/  
6CD3/6DT3**

34CE3

### HALF-WAVE VACUUM RECTIFIER

Duodecator type used as a damper diode in the horizontal-deflection circuit of color television receivers. Outlines section, 8G; requires duodecator 12-contact socket. Type 34CE3 is identical with type 6CE3/6CD3/6DT3 except for heater ratings.



12GK

|                                     |     |      |         |
|-------------------------------------|-----|------|---------|
| Heater Voltage (ac/dc) .....        | 6.3 | 34.5 | volts   |
| Heater Current .....                | 2.5 | 0.45 | amperes |
| Heater Warm-up Time (Average) ..... | —   | 11   | seconds |
| Direct Interelectrode Capacitances: |     |      |         |
| Plate to Cathode and Heater .....   |     | 13   | pF      |
| Cathode to Plate and Heater .....   |     | 18   | pF      |
| Heater to Cathode .....             |     | 5.5  | pF      |

**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                     |      |       |
|-------------------------------------|------|-------|
| Peak Inverse Plate Voltage#         | 5000 | volts |
| Peak Plate Current                  | 1500 | mA    |
| Average Plate Current               | 350  | mA    |
| Plate Dissipation                   | 11   | watts |
| Bulb Temperature (At hottest point) | 220  | °C    |
| Heater-Cathode Voltage              |      |       |
| Peak value                          | +300 | -5500 |
| Average value                       | +100 | -900  |
|                                     |      | volts |
|                                     |      | volts |

**CHARACTERISTIC, Instantaneous Value**

Tube Voltage Drop for plate current of 680 mA ..... 20 volts  
 # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

**6CE5**

Refer to chart at end of section.  
 For replacement use type 6BC5/6CE5.

**6CF6**


Refer to chart at end of section.  
 For replacement use type 6CB6A/6CF6.

**6CG3/6BW3**

For replacement use type 6CG3/6BW3/6DQ3.

**6CG3**  
**6CG3/**  
**6BW3/**  
**6DQ3**

**HALF-WAVE VACUUM RECTIFIER**



**12FX**

19CG3/19DQ3, 25CG3

Duodecar type used as damper diode in horizontal-deflection circuits of color and black-and-white television receivers. Outlines section, 8F; requires duodecar 12-contact socket. Types 19CG3/19DQ3 and 25CG3 are identical with type 6CG3 except for heater ratings.

|                        |           |        |       |         |
|------------------------|-----------|--------|-------|---------|
|                        | 6CG3      | 19CG3/ | 25CG3 |         |
|                        | 6CG3/     | 19DQ3  |       |         |
|                        | 6BW3/6DQ3 |        |       |         |
| Heater Voltage (ac/dc) | 6.3       | 19     | 25    | volts   |
| Heater Current         | 1.8       | 0.6    | 0.45  | amperes |
| Heater Warm-up Time    | —         | 11     | 11    | seconds |

**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |      |       |
|-----------------------------|------|-------|
| Peak Inverse Plate Voltage# | 5000 | volts |
| Peak Plate Current          | 2100 | mA    |
| Average Plate Current       | 350  | mA    |
| Plate Dissipation           | 6.5  | watts |
| Heater-Cathode Voltage:     |      |       |
| Peak value                  | +300 | -5000 |
| Average value               | +100 | -900  |
|                             |      | volts |
|                             |      | volts |

**CHARACTERISTIC, Instantaneous Value**

Tube Voltage Drop for plate current of 700 mA ..... 25 volts  
 # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

Refer to chart at end of section.

For replacement use type 6CG3/6BW3/6DQ3.

**6CG3/6CD3**

For replacement use type 6FQ/6CG7.

**6CG7**

Refer to chart at end of section.


**6CG8**

**6CG8A**

5CG8

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used as combined oscillator and mixer tube in color and black-and-white television receivers utilizing an intermediate frequency in the order of 40 MHz. When used in an AM/FM receiver, the triode unit is used as an oscillator for both sections. In the AM section, the pentode unit is used as a high-gain pentode mixer; in the FM section, the pentode unit is used either as a pentode mixer or as a triode-connected mixer depending on signal-to-noise considerations. **Outlines section, 6B;** requires miniature 9-contact socket. Type 5CG8 is identical with type 6CG8A except for heater ratings. These types are electrically identical with miniature type 6X8 except for inter-electrode capacitances.



9GF

|  | 5CG8     | 6CG8A    |         |
|--|----------|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 4.7      | 6.3      | volts   |
| Heater Current .....   | 0.6      | 0.45     | ampere  |
| Heater Warm-up Time (Average) .....                          | 11       | 11       | seconds |
| Heater-Cathode Voltage:                                      |          |          |         |
| Peak value .....   | ±200 max | ±200 max | volts   |
| Average value .....  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                          |          |          |         |
| Triode Unit:   |          |          |         |
| Grid to Plate .....  | 1.5      | 1.5      | pF      |
| Grid to Cathode, Heater, and Pentode Grid No.3 .....         | 2        | 2.4      | pF      |
| Plate to Cathode, Heater, and Pentode Grid No.3 .....        | 0.5      | 1        | pF      |
| Pentode Unit:  |          |          |         |
| Grid No.1 to Plate .....                                     | 0.04 max | 0.02 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 4.6      | 4.8      | pF      |
| Pentode Grid No.1 to Triode Plate .....                      | 0.9      | 1.6      | pF      |
| Pentode Plate to Triode Plate .....                          | 0.05 max | 0.04 max | pF      |
| Heater to Cathode .....                                      | 6.5      | 6.5*     | pF      |

\* With external shield connected to cathode, except as noted.

\* With external shield connected to plate.

**6CH3**


For replacement use type 6CJ3/6CH3.

**6CH8**

Refer to chart at end of section.

**6CJ3  
6CJ3/6CH3****HALF-WAVE  
VACUUM RECTIFIER**

Novar type used as damper tube in horizontal-deflection circuits of black-and-white television receivers. **Outlines section, 30F;** requires novar 9-contact socket. Socket terminals 1, 3, 6, and 8 should not be used as tie points. This tube, like other power-handling tubes, should be adequately ventilated. Heater: volts (ac/dc), 6.3; amperes, 1.8.



9HP

**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |      |       |
|-----------------------------------|------|-------|
| Peak Inverse Plate Voltage# ..... | 5500 | volts |
| Peak Plate Current .....          | 2100 | mA    |
| Average Plate Current .....       | 350  | mA    |
| Plate Dissipation .....           | 6.5  | watts |
| Heater-Cathode Voltage:           |      |       |
| Peak value .....                  | +300 | —5500 |
| Average value .....               | +100 | —900  |



**CHARACTERISTICS, Instantaneous Value**


Tube Voltage Drop for plate current of 700 mA ..... 25 volts  
 # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

Refer to chart at end of section.  
 For replacement use type 6CL3/6CK3.

**6CK3**

Refer to chart at end of section.

**6CK4**



**9HP**

**HALF-WAVE  
 VACUUM RECTIFIER**

**6CL3  
 6CL3/6CK3**

12CL3

Novar type used as a damper tube in horizontal-deflection circuits of color and black-and-white television receivers. Outlines section, 30B; requires novar 9-contact socket. Socket terminals 1, 3, 6, and 8 should not be used as tie points. This tube, like other power-handling tubes, should be adequately ventilated. Type 12CL3 is identical with type 6CL3 except for heater ratings.

|  | 6CL3<br>6CL3/6CK3 | 12CL3 |         |
|--|-------------------|-------|---------|
| Heater Voltage (ac/dc) .....               | 6.3               | 12.6  | volts   |
| Heater Current .....                       | 1.2               | 0.6   | amperes |
| Heater Warm-up Time (Average) .....        | —                 | 11    | seconds |
| <b>Direct Interelectrode Capacitances:</b> |                   |       |         |
| Plate to Cathode and Heater .....          |                   | 6.5   | pF      |
| Cathode to Plate and Heater .....          |                   | 9     | pF      |
| Heater to Cathode .....                    |                   | 3     | pF      |

**Damper Service**


For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| Peak Inverse Plate Voltage# .....         | 5500 | volts |
| Peak Plate Current .....                  | 1300 | mA    |
| Average Plate Current .....               | 250  | mA    |
| Plate Dissipation .....                   | 8.5  | watts |
| Bulb Temperature (At hottest point) ..... | 220  | °C    |
| <b>Heater-Cathode Voltage:</b>            |      |       |
| Peak value .....                          | +300 | —5000 |
| Average value .....                       | +100 | —900  |
|   |      | volts |

**CHARACTERISTICS, Instantaneous Value**

Tube Voltage Drop for plate current of 350 mA ..... 16 volts  
 # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).



**9BV**

**POWER PENTODE**

**6CL6**

Miniature type used in output stage of video amplifier of color and black-and-white television receivers and as wide-band amplifier tube in industrial and laboratory equipment. Outlines section, 6E; requires miniature 9-contact socket.

|  |          |        |  |
|--|----------|--------|--|
| Heater Voltage (ac/dc) .....   | 6.3      | volts  |  |
| Heater Current .....   | 0.65     | ampere |  |
| Peak Heater-Cathode Voltage .....  | ±100 max | volts  |  |
| <b>Direct Interelectrode Capacitances (Approx.):</b>                             |          |        |  |
| Grid No.1 to Plate .....   | 0.12     | pF     |  |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield ..... | 11       | pF     |  |
| Plate to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield .....     | 5.5      | pF     |  |

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Center Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage                                       | 300 | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value | 0   | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage              | 300 | volts |
| Grid-No.2 Voltage                                   | 150 | volts |
| Grid-No.1 (Control-Grid) Voltage:                   |     |       |
| Negative-bias value                                 | 50  | volts |
| Positive-bias value                                 | 0   | volts |
| Plate Dissipation                                   | 7.5 | watts |
| Grid-No.2 Input                                     | 1.7 | watts |
| Bulb Temperature (At hottest point)                 | 200 | °C    |

## TYPICAL OPERATION


|  |                                |          |
|--|--------------------------------|----------|
| Plate Voltage  | 250                            | volts    |
| Grid No.3  | Connected to cathode at socket | volts    |
| Grid-No.2 Voltage                                      | 150                            | volts    |
| Grid-No.1 Voltage                                      | -3                             | volts    |
| Peak AF Grid-No.1 Voltage                              | 3                              | volts    |
| Zero-Signal Plate Current                              | 30                             | mA       |
| Maximum-Signal Plate Current                           | 31                             | mA       |
| Zero-Signal Grid-No.2 Current                          | 7                              | mA       |
| Maximum-Signal Grid-No.2 Current                       | 7.2                            | mA       |
| Plate Resistance (Approx.)                             | 0.09                           | megohm   |
| Transconductance                                       | 11000                          | μmhos    |
| Load Resistance  | 7500                           | ohms     |
| Total Harmonic Distortion                              | 8                              | per cent |
| Maximum-Signal Power Output                            | 2.8                            | watts    |
| Grid-No.1 Voltage (Approx.) for plate current of 10 mA | -14                            | volts    |

## TYPICAL OPERATION IN MHz-BANDWIDTH VIDEO AMPLIFIER

|   |                                |        |
|---|--------------------------------|--------|
| Plate Supply Voltage                    | 300                            | volts  |
| Grid No.3                               | Connected to cathode at socket | volts  |
| Grid-No.2 Supply Voltage                | 300                            | volts  |
| Grid-No.1 Bias Voltage                  | -2                             | volts  |
| Grid-No.1 Signal Voltage (Peak to Peak) | 3                              | volts  |
| Grid-No.2 Resistor                      | 24000                          | ohms   |
| Grid-No.1 Resistor                      | 0.1                            | megohm |
| Load Resistor                           | 3900                           | ohms   |
| Zero-Signal Plate Current               | 30                             | mA     |
| Zero-Signal Grid-No.2 Current           | 7                              | mA     |
| Voltage Output (Peak to Peak)           | 132                            | volts  |


## MAXIMUM CIRCUIT VALUES

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1 Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |

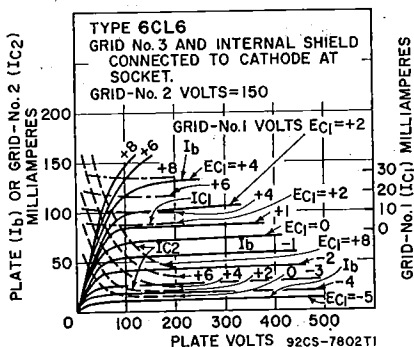

6CL8

Refer to chart at end of section.



**MEDIUM-MU TRIODE—  
SHARP-CUTOFF TETRODE**

**6CL8A**

5CL8A

Miniature type used as combined vhf oscillator and mixer in color and black-and-white television receivers. Outlines section, 6B; requires miniature 9-contact socket. For maximum ratings as class A<sub>1</sub> amplifier, see type 6U8A. Type 5CL8A is identical with type 6CL8A except for heater ratings.

|   |                   |                 |         |
|---|-------------------|-----------------|---------|
| Heater Voltage (ac/dc) .....  | 5CL8A<br>4.7      | 6CL8A<br>6.3    | volts   |
| Heater Current .....  | 0.6               | 0.45            | ampere  |
| Heater Warm-up Time (Average) .....                                     | 11                | 11              | seconds |
| Heater-Cathode Voltage:   |                   |                 |         |
| Peak value .....  | ±200 max          | ±200 max        | volts   |
| Average value .....   | 100 max           | 100 max         | volts   |
| Direct Interelectrode Capacitances:                                     |                   |                 |         |
| Triode Unit:  | <b>Unshielded</b> | <b>Shielded</b> |         |
| Grid to Plate .....   | 1.8               | 1.8             | pF      |
| Grid to Cathode, Tetrode Cathode, Heater,<br>and Internal Shield .....  | 2.8               | 2.8             | pF      |
| Plate to Cathode, Tetrode Cathode, Heater,<br>and Internal Shield ..... | 1.5               | 2               | pF      |
| Tetrode Unit:   |                   |                 |         |
| Grid No. 1 to Plate .....   | 0.02 max          | 0.01 max        | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2,<br>and Internal Shield .....   | 5                 | 5               | pF      |
| Plate to Cathode, Heater, Grid No.2,<br>and Internal Shield .....       | 2                 | 3               | pF      |
| Tetrode Grid No.1 to Triode Plate .....                                 | 0.015 max         | 0.01 max        | pF      |
| Tetrode Plate to Triode Plate .....                                     | 0.15 max          | 0.03 max        | pF      |
| Heater to Cathode (Each Unit) .....                                     | 3                 | 3               | pF      |


**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|   |       |      |        |
|---|-------|------|--------|
| Plate Supply Voltage .....                                      | 125   | 125  | volts  |
| Grid-No.2 (Screen-Grid) Voltage .....                           | —     | 125  | volts  |
| Grid-No.1 Voltage .....   | —1    | —1   | volt   |
| Amplification Factor .....                                      | 40    | —    |        |
| Plate Resistance (Approx.) .....                                | 0.005 | 0.2  | megohm |
| Transconductance .....  | 8000  | 6500 | μmhos  |
| Plate Current .....   | 14    | 12   | mA     |
| Grid-No.2 Current .....   | —     | 4    | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of<br>20 μA ..... | —9    | —9   | volts  |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |      |        |
|----------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance:    |     |      |        |
| For fixed-bias operation .....   | 0.5 | 0.25 | megohm |
| For cathode-bias operation ..... | 1   | 1    | megohm |



**HALF-WAVE  
VACUUM RECTIFIER**

**6CM3**

Novar type used as damper tube in horizontal-deflection circuits of color and black-and-white television receivers. Outline section, 30B; requires novar 9-contact socket. Socket terminals 1, 3, 6, and 8 should not be used as tie points. This tube, like other power-handling tubes, should be adequately ventilated.

|                                     |     |         |
|-------------------------------------|-----|---------|
| Heater Voltage (ac/dc) .....        | 6.3 | volts   |
| Heater Current .....                | 2.4 | amperes |
| Direct Interelectrode Capacitances: |     |         |
| Plate to Cathode and Heater .....   | 20  | pF      |
| Cathode to Plate and Heater .....   | 18  | pF      |
| Heater to Cathode .....             | 4   | pF      |

### Damper Service

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                             |      |       |
|-----------------------------|------|-------|
| Peak Inverse Plate Voltage# | 5500 | volts |
| Peak Plate Current          | 1700 | mA    |
| Average Plate Current       | 400  | mA    |
| Plate Dissipation           | 12   | watts |
| Heater-Cathode Voltage:     |      |       |
| Peak value                  | +300 | volts |
| Average value               | +100 | volts |

#### CHARACTERISTIC, Instantaneous Value

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 350 mA | 10 | volts |
|---|----|-------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

### 6CM6


Refer to chart at end of section.

## 6CM7

8CM7

### MEDIUM-MU DUAL TRIODE

Miniature type used as combined vertical-deflection oscillator and vertical-deflection amplifier in black-and-white television receivers. Unit No.1 is used as a conventional blocking oscillator in vertical-deflection circuits, and unit No.2 as a vertical-deflection amplifier. Outlines section, 6E; requires miniature 9-contact socket. Types 8CM7 is identical with type 6CM7 except for heater ratings.



|   |           |           |      |         |
|---|-----------|-----------|------|---------|
| Heater Voltage (ac/dc)                        | 6.3       | 8CM7      | 8.4  | volts   |
| Heater Current                                | 0.6       |           | 0.45 | ampere  |
| Heater Warm-up Time (Average)                 | 11        |           | 11   | seconds |
| Heater-Cathode Voltage:                       |           |           |      |         |
| Peak value                                    | ±200 max  | ±200 max  |      | volts   |
| Average value                                 | 100 max   | 100 max   |      | volts   |
| Direct Interelectrode Capacitances (Approx.): |           |           |      |         |
| Grid to Plate                                 | Unit No.1 | Unit No.2 |      | pF      |
| Grid to Cathode and Heater                    | 3.8       | 3         |      | pF      |
| Plate to Cathode and Heater                   | 2         | 3.5       |      | pF      |
|   | 0.5       | 0.4       |      | pF      |

### Class A<sub>1</sub> Amplifier



|   |       |           |           |       |
|---|-------|-----------|-----------|-------|
| CHARACTERISTICS                                   |       | Unit No.1 | Unit No.2 |       |
| Plate Voltage                                     | 200   | 250       |           | volts |
| Grid Voltage                                      | -7    | -8        |           | volts |
| Amplification Factor                              | 21    | 18        |           |       |
| Plate Resistance (Approx.)                        | 10500 | 4100      |           | ohms  |
| Transconductance                                  | 2000  | 4400      |           | μmhos |
| Plate Current                                     | 5     | 20        |           | mA    |
| Plate Current for grid voltage of -10 volts       | 1     | —         |           | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA | -14   | —         |           | volts |

### Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system

|   |      |            |           |         |
|---|------|------------|-----------|---------|
| MAXIMUM RATINGS (Design-Maximum Values) |      | Unit No.1  | Unit No.2 |         |
| DC Plate Voltage                        | 550  | Oscillator | Amplifier | 550     |
| Peak Positive-Pulse Plate Voltage#      | —    |            |           | 2200    |
| Peak Negative-Pulse Grid Voltage        | 220  |            |           | 220     |
| Peak Cathode Current                    | 77   |            |           | 77      |
| Average Cathode Current                 | 17   |            |           | 22      |
| Plate Dissipation                       | 1.45 |            |           | 6       |
| MAXIMUM CIRCUIT VALUES                  |      |            |           |         |
| Grid-Circuit Resistance:                |      |            |           |         |
| For fixed-bias operation                | 2.2  |            | 1         | megohms |
| For cathode-bias operation              | 2.2  |            | 2.5       | megohms |
| For grid-resistor-bias operation        | 2.2  |            | —         | megohms |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

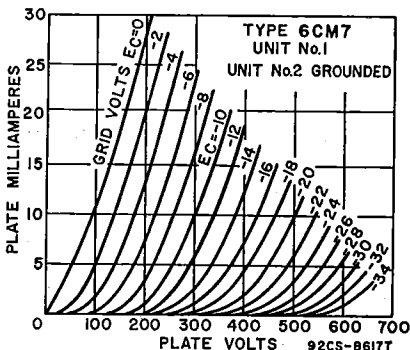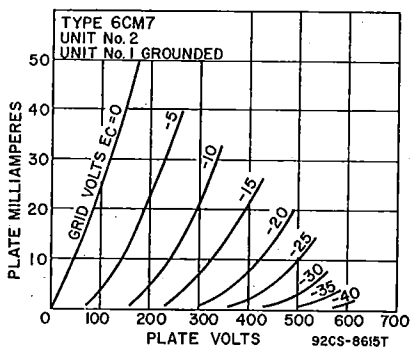


Refer to chart at end of section.

6CM8

TWIN DIODE—  
HIGH-MU TRIODE

6CN7



Miniature type used as combined horizontal phase detector and reactance tube in color and black-and-white television receivers. The triode unit is used in sync-separator, sync-amplifier, or audio amplifier circuits. Outlines section, 6B; requires miniature 9-contact socket. For typical operation of triode unit as resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section.

9EN

|   |          |         |
|---|----------|---------|
| Heater Voltage (ac/dc):   |          |         |
| Series .....  | 6.3      | volts   |
| Parallel .....  | 3.15     | volts   |
| Heater Current:   |          |         |
| Series .....  | 0.3      | ampere  |
| Parallel .....  | 0.6      | ampere  |
| Heater Warm-up Time (Average)   |          |         |
| .....   | 11       | seconds |
| Heater-Cathode Voltage:   |          |         |
| Peak value .....  | ±200 max | volts   |
| Average value .....   | 100 max  | volts   |
| Direct Interelectrode Capacitances:   |          |         |
| Triode Unit:  |          |         |
| Grid to Plate .....   | 1.8      | pF      |
| Grid to Cathode and Heater .....  | 1.5      | pF      |
| Plate to Cathode and Heater .....   | 0.5      | pF      |
| Diode Units:  |          |         |
| Diode-No.1 Plate to Cathode of Diodes No.1 and No. 2, Heater, and Internal Shield ..... | 3.6      | pF      |
| Diode-No.2 Plate to Cathode of Diodes No.1 and No. 2, Heater, and Internal Shield ..... | 3.6      | pF      |
| Triode Grid to Either Diode Plate .....   | 0.006    | pF      |

Triode Unit as Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Maximum Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 330 | volts |
| Grid Voltage, Positive-bias value ..... | 0   | volts |
| Plate Dissipation .....                 | 1.1 | watt  |

CHARACTERISTICS

|                                  |       |       |       |
|----------------------------------|-------|-------|-------|
| Plate Voltage .....              | 100   | 250   | volts |
| Grid Voltage .....               | -1    | -3    | volts |
| Amplification Factor .....       | 70    | 70    |       |
| Plate Resistance (Approx.) ..... | 54000 | 58000 | ohms  |
| Transconductance .....           | 1300  | 1200  | μmhos |
| Plate Current .....              | 0.8   | 1     | mA    |

Diode Units

MAXIMUM RATINGS (Design-Maximum Values)

|                                 |     |    |
|---------------------------------|-----|----|
| Plate Current (Each Unit) ..... | 5.5 | mA |
|---------------------------------|-----|----|


Refer to chart at end of section.  
For replacement use type 6DE4/6CQ4.

6CQ4

6CQ8

### MEDIUM-MU TRIODE— SHARP-CUTOFF TETRODE

Miniature type used in color and black-and-white television receiver applications. The tetrode unit is used as a mixer, video if amplifier, or sound if amplifier tube. The triode unit is used in vhf oscillator, phase-splitter, sync-clipper, sync-separator, and rf amplifier circuits. Outlines section, 6B; requires miniature 9-contact socket.



9GE

|  |                   |                  |    |
|--|-------------------|------------------|----|
| Heater Voltage (ac/dc) .....   | 6.3               | volts            |    |
| Heater Current .....   | 0.45              | ampere           |    |
| Heater Warm-up Time (Average) .....                                  | 11                | seconds          |    |
| Heater-Cathode Voltage:  |                   |                  |    |
| Peak value .....   | ±200 max          | volts            |    |
| Average value .....  | 100 max           | volts            |    |
| Direct Interelectrode Capacitances:                                  | <b>Unshielded</b> | <b>Shielded*</b> |    |
| Triode Unit:   |                   |                  |    |
| Grid to Plate .....  | 1.8               | 1.8              | pF |
| Grid to Cathode and Heater .....                                     | 2.7               | 2.7              | pF |
| Plate to Cathode and Heater .....                                    | 0.4               | 1.2              | pF |
| Tetrode Unit:  |                   |                  |    |
| Grid No.1 to Plate .....   | 0.019 max         | 0.015 max        | pF |
| Grid No.1 to Cathode, Heater, Grid No.2<br>and Internal Shield ..... | 5                 | 5                | pF |
| Plate to Cathode, Heater, Grid No.2,<br>and Internal Shield .....    | 2.5               | 3.3              | pF |
| Tetrode Plate to Triode Plate .....                                  | 0.07 max          | 0.01 max         | pF |
| Heater to Cathode (Each Unit) .....                                  | 3                 | 3†               | pF |

\* With external shield connected to cathode of unit under test.

† With external shield connected to ground.

### Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values)                     | Triode Unit        | Tetrode Unit |       |
|---|--------------------|--------------|-------|
| Plate Voltage .....   | 330                | 330          | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —                  | 330          | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |              |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | 0            | volts |
| Plate Dissipation .....                                     | 3.1                | 3.2          | watts |
| Grid-No.2 Input:  |                    |              |       |
| For grid-No.2 voltages up to 165 volts .....                | —                  | 0.7          | watt  |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |              |       |
| Grid Input .....  | 0.55               | —            | watt  |

### CHARACTERISTICS

|  |      |        |       |
|--|------|--------|-------|
| Plate-Supply Voltage .....                                       | 125  | 125    | volts |
| Grid-No.2 Supply Voltage .....                                   | —    | 125    | volts |
| Grid-No.1 Voltage .....  | —    | —1     | volts |
| Cathode-Bias Resistor .....                                      | 55   | —      | ohms  |
| Amplification Factor .....                                       | 40   | —      |       |
| Plate Resistance (Approx.) .....                                 | 5000 | 140000 | ohms  |
| Transconductance .....   | 8000 | 5800   | μmhos |
| Plate Current .....  | 15   | 12     | mA    |
| Grid-No.2 Current .....  | —    | 4.2    | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of<br>100 μA ..... | —7   | —7     | volts |

### MAXIMUM CIRCUIT VALUES

|                                  |     |      |        |
|----------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance:    |     |      |        |
| For fixed-bias operation .....   | 0.5 | 0.25 | megohm |
| For cathode-bias operation ..... | 1   | 1    | megohm |


6CR6

Refer to chart at end of section.

# 6CS6

## PENTAGRID AMPLIFIER

3CS6, 4CS6, 12CS6



7CH

Miniature type used as a gated amplifier in color and black-and-white television receivers. In such service, it may be used as a combined sync separator and sync clipper. Outlines section, 5C; requires miniature 7-contact socket. Types 3CS6, 4CS6, and 12CS6 are identical with type 6CS6 except for heater ratings.

|   | 3CS6     | 4CS6     | 6CS6     | 12CS6    |         |
|---|----------|----------|----------|----------|---------|
| Heater Voltage (ac/dc)  | 3.15     | 4.2      | 6.3      | 12.6     | volts   |
| Heater Current  | 0.6      | 0.45     | 0.3      | 0.15     | ampere  |
| Heater Warm-up Time (Average)   | 11       | 11       | 11       | —        | seconds |
| Heater-Cathode Voltage:   |          |          |          |          |         |
| Peak value  | ±200 max | ±200 max | ±200 max | ±200 max | volts   |
| Average value   | 100 max  | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.)  |          |          |          |          |         |
| Grid No.1 to Plate  |          |          |          | 0.07 max | pF      |
| Grid No.3 to Plate  |          |          |          | 0.36 max | pF      |
| Grid No.1 to Grid No.3  |          |          |          | 0.22 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, Grid No.4, and Grid No.5        |          |          |          | 5.5      | pF      |
| Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2, Grid No.4, and Grid No.5        |          |          |          | 7        | pF      |
| Plate to Cathode, Heater, Grid No.1, Grid No.2, Grid No.3, Grid No.4, and Grid No.5 |          |          |          | 7.5      | pF      |

### Class A<sub>1</sub> Amplifier

#### CHARACTERISTICS

|  |      |      |        |
|--|------|------|--------|
| Plate Voltage  | 100  | 100  | volts  |
| Grids-No.2-and-No.4 Voltage                            | 30   | 30   | volts  |
| Grid-No.3 Voltage                                      | -1   | 0    | volt   |
| Grid-No.1 Voltage                                      | 0    | -1   | volt   |
| Plate Resistance (Approx.)                             | 0.7  | 1    | megohm |
| Grid-No.3-to-Plate Transconductance                    | 1500 | —    | μmhos  |
| Grid-No.1-to-Plate Transconductance                    | —    | 1100 | μmhos  |
| Plate Current  | 0.8  | 1    | mA     |
| Grids-No.2-and-No.4 Current                            | 5.5  | 1.3  | mA     |
| Grid-No.3 Voltage (Approx.) for plate current of 50 μA | -2.2 | —    | volts  |
| Grid-No.1 Voltage (Approx.) for plate current of 50 μA | —    | -2.5 | volts  |


### Gated Amplifier Service

#### MAXIMUM RATINGS (Design-Center Values)

|  |                    |       |
|--|--------------------|-------|
| Plate Voltage  | 300                | volts |
| Grids-No.2-and-No.4 Supply Voltage                         | 300                | volts |
| Grids-No.2-and-No.4 Voltage                                | See curve page 300 |       |
| Cathode Current  | 14                 | mA    |
| Plate Dissipation  | 1                  | watt  |
| Grids-No.2-and-No.4 Input:                                 |                    |       |
| For grids-No.2-and-No.4 voltages up to 150 volts           | 1                  | watt  |
| For grids-No.2-and-No.4 voltages between 150 and 300 volts | See curve page 300 |       |

#### MAXIMUM CIRCUIT VALUES

|                              |      |         |
|------------------------------|------|---------|
| Grid-No.1-Circuit Resistance | 0.47 | megohm  |
| Grid-No.3-Circuit Resistance | 2.2  | megohms |



9EF

## MEDIUM-MU DUAL TRIODE

# 6CS7

8CS7

Miniature type used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers. Unit No.1 is used as a conventional blocking oscillator in vertical-deflection circuits, and unit No.2 as a vertical-deflection amplifier. Outline section, 6E; requires miniature 9-contact socket. Type 8CS7 is identical with type 6CS7 except for heater ratings.

|   |           |           |         |
|---|-----------|-----------|---------|
| Heater Voltage (ac/dc) .....                  | 6CS7      | 8CS7      | volts   |
| Heater Current .....                          | 6.3       | 8.4       | ampere  |
| Heater Warm-up Time (Average) .....           | 0.6       | 0.45      | seconds |
| Heater-Cathode Voltage:                       |           |           |         |
| Peak value .....                              | ±200 max  | ±200 max  | volts   |
| Average value .....                           | 100 max   | 100 max   | volts   |
| Direct Interelectrode Capacitances (Approx.): | Unit No.1 | Unit No.2 |         |
| Grid to Plate .....                           | 2.6       | 2.6       | pF      |
| Grid to Cathode and Heater .....              | 1.8       | 3         | pF      |
| Plate to Cathode and Heater .....             | 0.5       | 0.5       | pF      |

### Class A<sub>1</sub> Amplifier

| CHARACTERISTICS   | Unit No.1<br>Oscillator | Unit No.2<br>Amplifier |       |
|---|-------------------------|------------------------|-------|
| Plate Voltage .....                                     | 250                     | 250                    | volts |
| Grid Voltage .....                                      | -8.5                    | -10.5                  | volts |
| Amplification Factor .....                              | 17                      | 15.5                   |       |
| Plate Resistance (Approx.) .....                        | 7700                    | 3450                   | ohms  |
| Transconductance .....                                  | 2200                    | 4500                   | μmhos |
| Plate Current .....                                     | 10.5                    | 19                     | mA    |
| Plate Current for grid voltage of -16 volts .....       | —                       | 3                      | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA ..... | -24                     | —                      | volts |
| Grid Voltage (Approx.) for plate current of 50 μA ..... | —                       | -22                    | volts |

### Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Center Values)                                  | Unit No.1<br>Oscillator | Unit No.2<br>Amplifier |       |
|---|-------------------------|------------------------|-------|
| DC Plate Voltage .....  | 500                     | 500                    | volts |
| Peak Positive-Pulse Plate Voltage <sup>#</sup> (Absolute Maximum) ..... | —                       | 2200 <sup>Δ</sup>      | volts |
| Peak Negative-Pulse Grid Voltage .....                                  | 400                     | 250                    | volts |
| Peak Cathode Current .....  | 70                      | 105                    | mA    |
| Average Cathode Current .....   | 20                      | 30                     | mA    |
| Plate Dissipation .....   | 1.25                    | 6.5                    | watts |

#### MAXIMUM CIRCUIT VALUES

|                               |     |     |         |
|-------------------------------|-----|-----|---------|
| Grid-Circuit Resistance ..... | 2.2 | 2.2 | megohms |
|-------------------------------|-----|-----|---------|

<sup>#</sup> Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

<sup>Δ</sup> Under no circumstances should this absolute value be exceeded.

### 6CT3


Refer to chart at end of section.

## 6CU5

### BEAM POWER TUBE

12CU5/12C5, 17CU5,  
17CU5/17C5

Miniature type used in the audio output stage of television receivers. Outlines section, 5D; requires miniature 7-contact socket. Types 12CU5/12C5, 17CU5, and 17CU5/17C5 are identical with type 6CU5 except for heater ratings.



7CV

|  | 6CU5     | 12CU5/12C5 | 17CU5/<br>17CU5/<br>17C5 |         |
|--|----------|------------|--------------------------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | 12.6       | 16.8                     | volts   |
| Heater Current .....   | 1.2      | 0.6        | 0.45                     | ampere  |
| Heater Warm-up Time (Average) .....                          | —        | 11         | 11                       | seconds |
| Heater-Cathode Voltage:                                      |          |            |                          |         |
| Peak value .....   | ±200 max | ±200 max   | ±200 max                 | volts   |
| Average value .....  | 100 max  | 100 max    | 100 max                  | volts   |
| Direct Interelectrode Capacitances (Approx.):                |          |            |                          |         |
| Grid No.1 to Plate .....                                     |          |            | 0.6                      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |          |            | 13                       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |          |            | 8.5                      | pF      |



**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage   | 150 | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 130 | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0   | volts |
| Plate Dissipation                                     | 7   | watts |
| Grid-No.2 Input                                       | 1.4 | watts |
| Bulb Temperature (At hottest point)                   | 220 | °C    |

**TYPICAL OPERATION**

|                                  |       |          |
|----------------------------------|-------|----------|
| Plate Voltage                    | 120   | volts    |
| Grid-No.2 Voltage                | 110   | volts    |
| Grid-No.1 Voltage                | -8    | volts    |
| Peak AF Grid-No.1 Voltage        | 8     | volts    |
| Zero-Signal Plate Current        | 49    | mA       |
| Maximum-Signal Plate Current     | 50    | mA       |
| Zero-Signal Grid-No.2 Current    | 4     | mA       |
| Maximum-Signal Grid-No.2 Current | 8.5   | mA       |
| Plate Resistance (Approx.)       | 10000 | ohms     |
| Transconductance                 | 7500  | μmhos    |
| Load Resistance                  | 2500  | ohms     |
| Total Harmonic Distortion        | 10    | per cent |
| Maximum-Signal Power Output      | 2.3   | watts    |

**MAXIMUM CIRCUIT VALUES**


|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |

For replacement use type 6BQ6GTB/6CU6.

**6CU6**

Refer to chart at end of section.

**6CU8**



INDEX=LARGE LUG  
●=PIN CUT OFF

**12AQ**

**HIGH-MU TRIODE**

**6CW4**

2CW4, 13CW4

Nuvistor type used as a grounded-cathode, neutralized rf amplifier in vhf tuners of color and black-and-white television and FM receivers. Outlines section, 1; requires nuvistor socket. Types 2CW4 and 13CW4 are identical with type 6CW4 except for heater ratings.

|  | 2CW4     | 6CW4     | 13CW4    |         |
|--|----------|----------|----------|---------|
| Heater Voltage (ac/dc)                       | 2.1      | 6.3      | 13.5     | volts   |
| Heater Current                               | 0.45     | 0.135    | 0.06     | ampere  |
| Heater Warm-up Time (Average)                | 8        | —        | —        | seconds |
| Peak Heater-Cathode Voltage                  | ±100 max | ±100 max | ±100 max | volts   |
| Direct Interelectrode Capacitances (Approx.) |          |          |          |         |
| Grid to Plate                                |          | 0.92     |          | pF      |
| Grid to Cathode, Heater, and Shell           |          | 4.3      |          | pF      |
| Plate to Cathode, Heater, and Shell          |          | 1.8      |          | pF      |
| Plate to Cathode                             |          | 0.18     |          | pF      |
| Heater to Cathode                            |          | 1.6      |          | pF      |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                      |      |       |
|----------------------|------|-------|
| Plate Supply Voltage | 300° | volts |
| Plate Voltage        | 135  | volts |
| Grid Voltage:        |      |       |
| Negative-bias value  | 55   | volts |
| Peak positive value  | 0    | volts |
| Cathode Current      | 15   | mA    |
| Plate Dissipation    | 1.5  | watt  |

## CHARACTERISTICS AND TYPICAL OPERATION


|   | Characteristics | Typical Operation |           |
|---|-----------------|-------------------|-----------|
| Plate Supply Voltage .....                                | 110             | 70                | volts     |
| Grid Supply Voltage .....                                 | 0               | 0                 | volts     |
| Cathode-Bias Resistor .....                               | 130             | —                 | ohms      |
| Grid Resistor .....                                       | —               | 47000             | ohms      |
| Amplification Factor .....                                | 65              | 68                |           |
| Plate Resistance (Approx.) .....                          | 6600            | 5440              | ohms      |
| Transconductance .....                                    | 9800            | 12500             | $\mu$ mos |
| Plate Current .....                                       | 7               | 7.2               | mA        |
| Grid Voltage (Approx.) for plate current of 10 $\mu$ A .. | -4              | —                 | volts     |

## MAXIMUM CIRCUIT VALUES

|                                  |     |         |
|----------------------------------|-----|---------|
| Grid-Circuit Resistance:*        |     |         |
| For fixed-bias operation .....   | 0.5 | megohm  |
| For cathode-bias operation ..... | 2.2 | megohms |

\* A plate supply voltage of 300 volts may be used provided a sufficiently large resistor is used in the plate circuit to limit the plate dissipation to 1.5 watts under any condition of operation.

■ For operation at metal-shell temperatures up to 135° C.

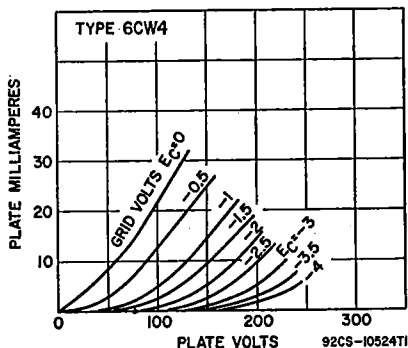


6CW5

Refer to chart at end of section.

6CW5/  
EL868CW5/XL86,  
10CW5/LL86,  
15CW5/PL84

## POWER PENTODE

Miniature type used for vertical-deflection amplifier service in color and black-and-white television receivers. Outlines section, 6G; requires miniature 9-contact socket. Types 8CW5/XL86, 10CW5/LL86, and 15CW5/PL84 are identical with type 6CW5/EL86 except for heater ratings.



|  | 6CW5/<br>EL86 | 8CW5/<br>XL86 | 10CW5/<br>LL86 | 15CW5/<br>PL84 |         |
|--|---------------|---------------|----------------|----------------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3           | 8             | 10.6           | 15             | volts   |
| Heater Current .....   | 0.76          | 0.6           | 0.45           | 0.3            | ampere  |
| Heater Warm-up Time .....                                    | —             | —             | 11             | —              | seconds |
| Heater-Cathode Voltage:                                      |               |               |                |                |         |
| Peak value .....   | ±330 max      | ±330 max      | ±330 max       | ±330 max       | volts   |
| Average value .....  | ±220 max      | ±220 max      | ±220 max       | ±220 max       | volts   |
| Direct Interelectrode Capacitances:                          |               |               |                |                |         |
| Grid No.1 to Plate .....                                     |               |               |                | 0.6            | pF      |
| Grid No.1 to Heater .....                                    |               |               |                | 0.25 max       | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |               |               |                | 13             | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |               |               |                | 6.8            | pF      |

**Class A<sub>1</sub> or Class AB<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |     |       |
|--|-----|-------|
| Plate Voltage                          | 275 | volts |
| Plate Supply Voltage                   | 600 | volts |
| Grid-No.2 Voltage                      | 220 | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage | 600 | volts |
| Cathode Current                        | 110 | mA    |
| Plate Dissipation                      | 14  | watts |
| Grid-No.2 Input                        | 2.1 | watts |
| Peak Grid-No.2 Input                   | 7   | watts |

**CHARACTERISTICS**

|                                    |       |       |
|------------------------------------|-------|-------|
| Plate Voltage                      | 170   | volts |
| Grid-No.2 Voltage                  | 170   | volts |
| Grid-No.1 (Control-Grid) Voltage   | -12.5 | volts |
| Mu Factor (Grid No.2 to Grid No.1) | 8     |       |
| Plate Resistance                   | 26000 | ohms  |
| Transconductance                   | 11000 | μmhos |
| Plate Current                      | 70    | mA    |
| Grid-No.2 Current                  | 3.6   | mA    |

**MAXIMUM CIRCUIT VALUE**

|                              |   |        |
|------------------------------|---|--------|
| Grid-No.1-Circuit Resistance | 1 | megohm |
|------------------------------|---|--------|

**Vertical-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                       |      |       |
|---------------------------------------|------|-------|
| Plate Voltage                         | 275  | volts |
| Peak Positive-Pulse Plate Voltage#    | 2200 | volts |
| Grid-No.2 Voltage                     | 275  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage | 250  | volts |
| Peak Cathode Current                  | 240  | mA    |
| Average Cathode Current               | 110  | mA    |
| Plate Dissipation                     | 12   | watts |
| Grid-No.2 Input                       | 2.1  | watts |


**MAXIMUM CIRCUIT VALUE**

|                              |     |         |
|------------------------------|-----|---------|
| Grid-No.1-Circuit Resistance | 2.2 | megohms |
|------------------------------|-----|---------|

# Pulse duration must not exceed 6% of a vertical scanning cycle (1.2 milliseconds).

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6CX8**  
8CX8



9DX

Miniature type used in television receiver applications. Pentode unit is used as video amplifier; triode unit is used in sound if-amplifier, sweep-oscillator, sync-separator, sync-amplifier, and sync-clipper circuits. Outlines section, 6E; requires miniature 9-contact socket. Type 8CX8 is identical with type 6CX8 except for heater ratings.

|   |             |           |        |
|---|-------------|-----------|--------|
| Heater Voltage (ac/dc)  | 6CX8<br>6.3 | 8CX8<br>8 | volts  |
| Heater Current  | 0.75        | 0.6       | ampere |
| Heater Warm-up Time (Average)   | —           | 11        | volts  |
| Heater-Cathode Voltage:   |             |           |        |
| Peak value  | ±200 max    | ±200 max  | volts  |
| Average value   | 100 max     | 100 max   | volts  |
| Direct Interelectrode Capacitances:                                     |             |           |        |
| Triode Unit:  |             |           |        |
| Grid to Plate   |             | 4.4       | pF     |
| Grid to Cathode and Heater  |             | 2.2       | pF     |
| Plate to Cathode and Heater   |             | 0.38      | pF     |
| Pentode Unit:   |             |           |        |
| Grid No.1 to Plate  |             | 0.06      | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield |             | 9         | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     |             | 4.4       | pF     |
| Triode Grid to Pentode Plate  |             | 0.018 max | pF     |
| Pentode Grid No.1 to Triode Plate                                       |             | 0.005 max | pF     |
| Pentode Plate to Triode Plate   |             | 0.17 max  | pF     |

Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values)                     | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage .....   | 330         | 330                | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                       | —           | 330                | volts |
| Grid-No.2 Voltage .....                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0           | 0                  | volts |
| Plate Dissipation .....                                     | 2           | 5                  | watts |
| Grid-No.2 Input:  |             |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | —           | 1.1                | watts |
| For grid-No.2 voltages between 165 and 330 volts .....      | —           | See curve page 300 |       |

## CHARACTERISTICS

|   |      |       |       |
|---|------|-------|-------|
| Plate Supply Voltage .....                                    | 150  | 200   | volts |
| Grid-No.2 Supply Voltage .....                                | —    | 125   | volts |
| Cathode-Bias Resistor .....                                   | 150  | 68    | ohms  |
| Amplification Factor .....                                    | 40   | —     |       |
| Plate Resistance (Approx.) .....                              | 8700 | 70000 | ohms  |
| Transconductance .....  | 4600 | 10000 | μmhos |
| Plate Current .....   | 9.2  | 24    | mA    |
| Grid-No.2 Current .....                                       | —    | 5.2   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA ..... | —5   | —8.5  | volts |

## MAXIMUM CIRCUIT VALUES


|                                  |     |      |        |
|----------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance:    |     |      |        |
| For fixed-bias operation .....   | 0.5 | 0.25 | megohm |
| For cathode-bias operation ..... | 1   | 1    | megohm |

**6CY5**

2CY5, 3CY5

## SHARP-CUTOFF TETRODE

Miniature type used as rf amplifier in vhf tuners of television receivers. Outlines section, 5C; requires miniature 7-contact socket. Types 2CY5 and 3CY5 are identical with type 6CY5 except for heater ratings.



|  | 2CY5     | 3CY5     | 6CY5     |         |
|--|----------|----------|----------|---------|
| Heater Voltage (ac/dc) .....                                   | 2.4      | 2.9      | 6.3      | volts   |
| Heater Current .....   | 0.6      | 0.45     | 0.2      | ampere  |
| Heater Warm-up Time (Average) .....                            | 11       | 11       | —        | seconds |
| Peak Heater-Cathode Voltage .....                              | ±100 max | ±100 max | ±100 max | volts   |
| Direct Interelectrode Capacitances (Approx.) <sup>o</sup> :    |          |          |          |         |
| Grid-No.1 to Plate .....                                       |          |          | 0.03     | pF      |
| Grid-No.1 to Cathode, Heater, Grid No.2 and Internal Shield .. |          |          | 4.5      | pF      |
| Plate to Cathode, Heater, Grid No.2, and Internal Shield ..... |          |          | 3        | pF      |

<sup>o</sup> With external shield connected to cathode.

Class A<sub>1</sub> Amplifier


| MAXIMUM RATINGS (Design-Maximum Values)                     |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 180                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 180                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Cathode Current .....                                       | 20                 | mA    |
| Plate Dissipation .....                                     | 2                  | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 90 volts .....                 | 0.5                | watt  |
| For grid-No.2 voltages between 90 and 180 volts .....       | See curve page 300 |       |

## CHARACTERISTICS

|  |      |        |
|--|------|--------|
| Plate Voltage .....  | 125  | volts  |
| Grid-No.2 Voltage .....                                      | 80   | volts  |
| Grid-No.1 Voltage .....                                      | —1   | volt   |
| Plate Resistance (Approx.) .....                             | 0.1  | megohm |
| Transconductance .....                                       | 8000 | μmhos  |
| Plate Current .....  | 10   | mA     |
| Grid-No.2 Current .....                                      | 1.5  | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA ..... | —6   | volts  |


## MAXIMUM CIRCUIT VALUE

|                                    |     |        |
|------------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance ..... | 0.5 | megohm |
|------------------------------------|-----|--------|

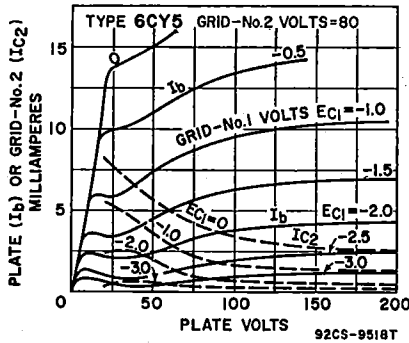

DUAL TRIODE

6CY7



Miniature type used as combined vertical oscillator and vertical-deflection amplifier in television receivers. Unit No.1 is used as a blocking oscillator in vertical-deflection circuits, and unit No.2 is used as a vertical-deflection amplifier. Outlines section, 6E; requires miniature 9-contact socket.

|                         |          |        |
|-------------------------|----------|--------|
| Heater Voltage (ac/dc)  | 6.3      | volts  |
| Heater Current          | 0.75     | ampere |
| Heater-Cathode Voltage: |          |        |
| Peak value              | ±200 max | volts  |
| Average value           | 100 max  | volts  |

Class A<sub>1</sub> Amplifier

|  | Unit No.1 | Unit No.2 |       |
|--|-----------|-----------|-------|
| Plate Supply Voltage                               | 250       | 150       | volts |
| Grid Voltage                                       | -3        | -         | volts |
| Cathode-Bias Resistor                              | -         | 620       | ohms  |
| Amplification Factor                               | 68        | 5         |       |
| Plate Resistance (Approx.)                         | 52000     | 920       | ohms  |
| Transconductance                                   | 1300      | 5400      | μmhos |
| Plate Current                                      | 1.2       | 30        | mA    |
| Plate Current for grid voltage of -30 volts        | -         | 3.5       | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA  | -5.5      | -         | volts |
| Grid Voltage (Approx.) for plate current of 200 μA | -         | -40       | volts |

Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system

|  | Unit No.1<br>Oscillator | Unit No.2<br>Amplifier |       |
|--|-------------------------|------------------------|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b> |                         |                        |       |
| DC Plate Voltage                               | 350                     | 350                    | volts |
| Peak Positive-Pulse Plate Voltage#             | -                       | 1800                   | volts |
| Peak Negative-Pulse Grid Voltage               | -400                    | -250                   | volts |
| Peak Cathode Current                           | -                       | 120                    | mA    |
| Average Cathode Current                        | -                       | 35                     | mA    |
| Plate Dissipation                              | 1                       | 5.5                    | watts |

MAXIMUM CIRCUIT VALUES

|                         |     |      |         |
|-------------------------|-----|------|---------|
| Grid-Circuit Resistance | 2.2 | 2.2† | megohms |
|-------------------------|-----|------|---------|

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).


† For cathode-bias operation.

# 6CZ5

## 5CZ5

### BEAM POWER TUBE

Miniature type used as a vertical-deflection amplifier in high-efficiency deflection circuits of color and black-and-white television receivers and in the audio output stage of television and radio receivers. Outlines section, 6G; requires miniature 9-contact socket. Type 5CZ5 is identical with type 6CZ5 except for heater ratings.



|  | 5CZ5     | 6CZ5     |         |
|--|----------|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 4.7      | 6.3      | volts   |
| Heater Current .....   | 0.6      | 0.45     | ampere  |
| Heater Warm-up Time (Average) .....                          | 11       | 11       | seconds |
| Heater-Cathode Voltage:                                      |          |          |         |
| Peak value .....   | ±200 max | ±200 max | volts   |
| Average value .....  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                          |          |          |         |
| Grid No.1 to Plate .....                                     |          | 0.4 max  | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |          | 9        | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |          | 6        | pF      |

### Class A<sub>1</sub> Amplifier

| CHARACTERISTICS   |      |       |       |
|---|------|-------|-------|
| Plate Voltage .....   | 75   | 250   | volts |
| Grid-No.2 Voltage .....                                       | 250  | 250   | volts |
| Grid-No.1 Voltage .....                                       | 0    | -15   | volts |
| Plate Resistance .....  | —    | 73000 | ohms  |
| Transconductance .....  | —    | 4800  | μmhos |
| Plate Current .....   | 130* | 46    | mA    |
| Grid-No.2 Current .....                                       | 16*  | 4.6   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA ..... | —    | -40   | volts |

### Vertical-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|  |      |       |
|--|------|-------|
| DC Plate Voltage .....                                     | 350  | volts |
| Peak Positive-Pulse Plate Voltage# .....                   | 2200 | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                      | 315  | volts |
| Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage ..... | 275  | volts |
| Peak Cathode Current .....                                 | 155  | mA    |
| Average Cathode Current .....                              | 45   | mA    |
| Plate Dissipation .....                                    | 10   | watts |
| Grid-No.2 Input .....                                      | 2.2  | watts |
| Bulb Temperature (At hottest point) .....                  | 250  | °C    |


#### MAXIMUM CIRCUIT VALUES

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |        |
| For fixed-bias operation .....   | 0.5 | megohm |
| For cathode-bias operation ..... | 1   | megohm |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

- 6D4** Refer to chart at end of section.
- 6D6** Refer to chart at end of section.
- 6D7** Refer to chart at end of section.
- 6D8G** Refer to chart at end of section.
- 6D10** Refer to chart at end of section.
- 6DA4** Refer to chart at end of section.  
For replacement use type 6DM4A/6DA4.
- 6DB5** Refer to chart at end of section.




## SHARP-CUTOFF PENTODE **6DC6**

Miniature type used in the gain-controlled picture if stages of color and black-and-white television receivers and as an rf amplifier in the tuners of such receivers. **Outlines section, 5C**; requires 7-contact miniature socket.

### 7CM

|   |          |        |
|---|----------|--------|
| Heater Voltage (ac/dc) .....  | 6.3      | volts  |
| Heater Current .....  | 0.3      | ampere |
| Heater-Cathode Voltage:   |          |        |
| Peak value .....  | ±200 max | volts  |
| Average value .....   | 100 max  | volts  |
| Direct Interelectrode Capacitances:   |          |        |
| Grid No.1 to Plate .....  | 0.02 max | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 6.5      | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     | 2        | pF     |

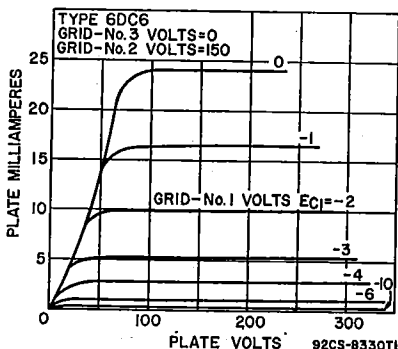

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Center Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 300                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value .....   | 0                  | volts |
| Grid-No.2 Supply Voltage .....                              | 300                | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                       | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 2                  | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 150 volts .....                | 0.5                | watt  |
| For grid-No.2 voltages between 150 and 300 volts .....      | See curve page 300 |       |

#### CHARACTERISTICS

|   |                                |        |
|---|--------------------------------|--------|
| Plate Supply Voltage .....                                      | 200                            | volts  |
| Grid No.3 .....   | Connected to cathode at socket |        |
| Grid-No.2 Supply Voltage .....                                  | 150                            | volts  |
| Cathode-Bias Resistor .....                                     | 180                            | ohms   |
| Plate Resistance (Approx.) .....                                | 0.5                            | megohm |
| Transconductance .....  | 5500                           | μmhos  |
| Plate Current .....   | 9                              | mA     |
| Grid-No.2 Current .....   | 3                              | mA     |
| Grid-No.1 Voltage (Approx.) for transconductance of 50 μmhos .. | -12.5                          | volts  |

#### MAXIMUM CIRCUIT VALUES

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 1    | megohm |

Refer to chart at end of section.

Refer to chart at end of section.


**6DC8**  
**6DC8/EBF89**

**6DE4**

## HALF-WAVE VACUUM RECTIFIER

## 6DE4/6CQ4

17DE4, 22DE4



Glass octal type used as damper tube in horizontal-deflection circuits of television receivers. Outlines section, 13G; requires octal socket. Socket terminals 1, 2, 4, and 6 should not be used as tie points. This tube, like other power-handling tubes, should be adequately ventilated. Types 17DE4 and 22DE4 are identical with type 6DE4/6CQ4 except for heater ratings.

|   | 6DE4/6CQ4 | 17DE4 | 22DE4 |         |
|---|-----------|-------|-------|---------|
| Heater Voltage (ac/dc)                        | 6.3       | 17    | 22.4  | volts   |
| Heater Current                                | 1.6       | 0.6   | 0.45  | amperes |
| Heater Warm-up Time (Average)                 | —         | 11    | 11    | seconds |
| Direct Interelectrode Capacitances (Approx.): |           |       |       |         |
| Plate to Cathode and Heater                   |           |       | 8.5   | pF      |
| Cathode to Plate and Heater                   |           |       | 11.5  | pF      |
| Heater to Cathode                             |           |       | 4     | pF      |

### Damper Service

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                             |      |       |       |
|-----------------------------|------|-------|-------|
| Peak Inverse Plate Voltage# |      | 5500  | volts |
| Peak Plate Current          |      | 1100  | mA    |
| Average Plate Current       |      | 180   | mA    |
| Plate Dissipation           |      | 6.5   | watts |
| Heater-Cathode Voltage:     |      |       |       |
| Peak value                  | +300 | -5500 | volts |
| Average value               | +100 | -900  | volts |

#### CHARACTERISTIC Instantaneous Value


|  |  |    |       |
|--|--|----|-------|
| Tube Voltage Drop for plate current of 350 mA  |  | 34 | volts |
| # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds). |  |    |       |

## 6DE6

4DE6

## SHARP-CUTOFF PENTODE

Miniature type used in the gain-controlled picture fix stages of television receivers utilizing an intermediate frequency in the order of 40 MHz and as an rf amplifier in vhf television tuners. Outlines section, 5C; requires miniature 7-contact socket. Type 4DE6 is identical with type 6DE6 except for heater ratings.



|   | 4DE6       | 6DE6                  |         |
|---|------------|-----------------------|---------|
| Heater Voltage (ac/dc)  | 4.2        | 6.3                   | volts   |
| Heater Current  | 0.45       | 0.3                   | ampere  |
| Heater Warm-up Time (Average)   | 11         | —                     | seconds |
| Heater-Cathode Voltage:   |            |                       |         |
| Peak value  | ±200 max   | ±200 max              | volts   |
| Average value   | 100 max    | 100 max               | volts   |
| Direct Interelectrode Capacitances:                                     |            |                       |         |
| Grid No.1 to Plate  | Unshielded | Shielded <sup>A</sup> | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 0.025 max  | 0.015 max             |         |
| Grid No.2 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 6.5        | 6.5                   | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 2          | 3                     | pF      |

<sup>A</sup> With external shield connected to cathode.

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)


|   |  |                    |       |
|---|--|--------------------|-------|
| Plate Voltage   |  | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value   |  | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                |  | 330                | volts |
| Grid-No.2 Voltage                                     |  | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value |  | 0                  | volts |
| Plate Dissipation                                     |  | 2.3                | watts |



Grid-No.2 Input:


For grid-No.2 voltages up to 165 volts .....  
 For grid-No.2 voltages between 165 and 330 volts .....

0.55 watt  
 See curve page 300

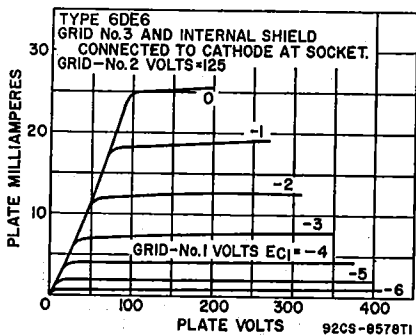

CHARACTERISTICS

|   |                                |            |
|---|--------------------------------|------------|
| Plate Supply Voltage .....  | 125                            | volts      |
| Grid No.3 .....   | Connected to cathode at socket |            |
| Grid-No.2 Supply Voltage .....  | 125                            | volts      |
| Cathode-Bias Resistor .....   | 56                             | ohms       |
| Plate Resistance (Approx.) .....  | 0.25                           | megohm     |
| Transconductance .....  | 8000                           | $\mu$ mhos |
| Transconductance for grid-No.1 volts of -5.5 and cathode resistor of 0 ohms ..... | 700                            | $\mu$ mhos |
| Plate Current .....   | 15.5                           | mA         |
| Grid-No.2 Current .....   | 4.2                            | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A .....                 | -9                             | volts      |



9HF

DUAL TRIODE

6DE7

10DE7, 13DE7

Miniature type used as combined vertical oscillator and vertical-deflection amplifier in television receivers. Unit No.1 is used as a blocking oscillator in vertical-deflection circuits, and unit No.2 is used as a vertical-deflection amplifier. Outlines section, 6E; requires miniature 9-contact socket. For curve of average plate characteristics, Unit No.2, refer to type 6DR7. Types 10DE7 and 13DE7 are identical with type 6DE7 except for heater ratings.

|   |               |               |               |         |
|---|---------------|---------------|---------------|---------|
| Heater Voltage (ac/dc) .....                  | 6.3           | 9.7           | 13            | volts   |
| Heater Current .....                          | 0.9           | 0.6           | 0.45          | ampere  |
| Heater Warm-up Time (Average) .....           | —             | 11            | 11            | seconds |
| Heater-Cathode Voltage:                       |               |               |               |         |
| Peak value .....                              | $\pm 200$ max | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....                           | 100 max       | 100 max       | 100 max       | volts   |
| Direct Interelectrode Capacitances (Approx.): | Unit No.1     |               | Unit No.2     |         |
| Grid to Plate .....                           | 4             |               | 8.5           | pF      |
| Grid to Cathode and Heater .....              | 2.2           |               | 5.5           | pF      |
| Plate to Cathode and Heater .....             | 0.52          |               | 1             | pF      |

Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|  |           |           |            |
|--|-----------|-----------|------------|
|  | Unit No.1 | Unit No.2 |            |
| Plate Voltage .....  | 250       | 150       | volts      |
| Grid Voltage .....   | -11       | -17.5     | volts      |
| Amplification Factor .....                                   | 17.5      | 6         |            |
| Plate Resistance (Approx.) .....                             | 8750      | 925       | ohms       |
| Transconductance .....                                       | 2000      | 6500      | $\mu$ mhos |
| Plate Current .....  | 5.5       | 35        | mA         |
| Plate Current for grid voltage of -24 volts .....            | —         | 10        | mA         |
| Grid Voltage (Approx.) for plate current of 10 $\mu$ A ..... | -20       | —         | volts      |
| Grid Voltage (Approx.) for plate current of 50 $\mu$ A ..... | —         | -44       | volts      |


**Vertical-Deflection Oscillator and Amplifier**

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Maximum Values) | Unit No.1  | Unit No.2 |       |
|---|------------|-----------|-------|
|   | Oscillator | Amplifier |       |
| DC Plate Voltage                        | 330        | 275       | volts |
| Peak Positive-Pulse Plate Voltage#      | —          | 1500      | volts |
| Peak Negative-Pulse Grid Voltage        | 400        | 250       | volts |
| Peak Cathode Current                    | 77         | 175       | mA    |
| Average Cathode Current                 | 22         | 50        | mA    |
| Plate Dissipation                       | 1.5        | 7         | watts |

**MAXIMUM CIRCUIT VALUES**

|   |     |     |         |
|---|-----|-----|---------|
| Grid-Circuit Resistance:  |     |     |         |
| For grid-resistor bias or cathode-bias operation                                      | 2.2 | 2.2 | megohms |
| # Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds). |     |     |         |

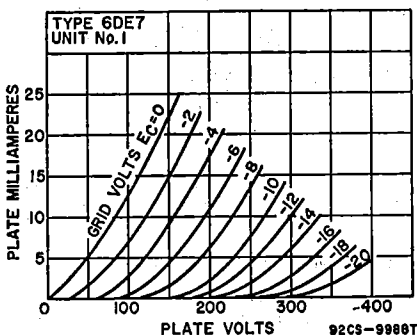


**6DG6GT**

**BEAM POWER TUBE**

Glass octal type used as output tube in audio-amplifier applications Outlines section, 13D; requires octal socket. This type may be supplied with pin 1 omitted.

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc)                                 | 6.3      | volts   |
| Heater Current   | 1.2      | amperes |
| Heater-Cathode Voltage:                                |          |         |
| Peak value   | ±200 max | volts   |
| Average value  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):          |          |         |
| Grid No.1 to Plate                                     | 0.6      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 15       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | 10       | pF      |



7S

**Class A<sub>1</sub> Audio-Frequency Power Amplifier**

| MAXIMUM RATINGS (Design-Center Values) |      |       |
|--|------|-------|
| Plate Voltage                          | 200  | volts |
| Grid-No.2 (Screen-Grid) Voltage        | 125  | volts |
| Plate Dissipation                      | 10   | watts |
| Grid-No.2 Input                        | 1.25 | watts |


**TYPICAL OPERATION**

|   |      |     |       |
|---|------|-----|-------|
| Plate Supply Voltage                    | 110  | 200 | volts |
| Grid-No.2 Supply Voltage                | 110  | 125 | volts |
| Grid-No.1 (Control-Grid) Supply Voltage | -7.5 | —   | volts |
| Peak AF Grid-No.1 Voltage               | 7.5  | 8.5 | volts |
| Cathode-Bias Resistor                   | —    | 180 | ohms  |
| Zero-Signal Plate Current               | 49   | 46  | mA    |
| Maximum-Signal Plate Current            | 50   | 47  | mA    |
| Zero-Signal Grid-No.2 Current           | 4    | 2.2 | mA    |
| Maximum-Signal Grid-No.2 Current        | 10   | 8.5 | mA    |

|                                   |       |       |            |
|-----------------------------------|-------|-------|------------|
| Plate Resistance (Approx.) .....  | 13000 | 28000 | ohms       |
| Transconductance .....            | 8000  | 8000  | $\mu$ mhos |
| Load Resistance .....             | 2000  | 4000  | ohms       |
| Total Harmonic Distortion .....   | 10    | 10    | per cent   |
| Maximum-Signal Power Output ..... | 2.1   | 3.8   | watts      |

**MAXIMUM CIRCUIT VALUES**

|                                  |  |     |        |
|----------------------------------|--|-----|--------|
| Grid-No.1-Circuit Resistance:    |  |     |        |
| For fixed-bias operation .....   |  | 0.1 | megohm |
| For cathode-bias operation ..... |  | 0.5 | megohm |



9AJ

**MEDIUM-MU TWIN TRIODE**

**6DJ8/  
ECC88**  
INDUSTRIAL  
TYPE

Miniature type used as a cascode amplifier in vhf color and black-and-white television tuners. Outlines section, 6B; requires miniature 9-contact socket.

|                              |       |        |
|------------------------------|-------|--------|
| Heater Voltage (ac/dc) ..... | 6.3   | volts  |
| Heater Current .....         | 0.365 | ampere |

|   |            |            |       |
|---|------------|------------|-------|
| <b>Heater-Cathode Voltage:</b>                      |            |            |       |
| Peak value .....                                    | Unit No. 1 | Unit No. 2 |       |
| Average value .....                                 | —          | —150       | volts |
| <b>Direct Interelectrode Capacitances:</b>          | 50         | —130       | volts |
| Grid to Plate .....                                 | 1.4        | 1.4        | pF    |
| Grid to Cathode, Heater, and Internal Shield .....  | 3.3        | —          | pF    |
| Cathode to Grid, Heater, and Internal Shield .....  | —          | 6.0        | pF    |
| Plate to Cathode, Heater, and Internal Shield ..... | 1.8        | —          | pF    |
| Plate to Grid, Heater, and Internal Shield .....    | —          | 2.8        | pF    |
| Plate to Cathode .....                              | —          | 1.8        | pF    |
| Heater to Cathode .....                             | —          | 2.7        | pF    |
| Grid to Heater .....                                | —          | 0.13       | pF    |
| Plate of Unit No. 1 to Plate of Unit No. 2 .....    |            | 0.045      | pF    |
| Grid of Unit No. 2 to Plate of Unit No. 1 .....     |            | 0.005      | pF    |

**Class A<sub>1</sub> Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Center Values)**


|   |     |       |
|---|-----|-------|
| Plate Supply Voltage .....                  | 130 | volts |
| Cathode Current .....                       | 25  | mA    |
| Plate Dissipation .....                     | 1.8 | watts |
| Negative Grid Voltage .....                 | 50  | volts |
| Plate Supply Voltage (cold condition) ..... | 550 | volts |

**CHARACTERISTICS**

|                                   |       |            |
|-----------------------------------|-------|------------|
| Plate Voltage .....               | 90    | volts      |
| Grid Voltage .....                | —1.3  | volts      |
| Amplification Factor .....        | 33    |            |
| Transconductance .....            | 12250 | $\mu$ mhos |
| Plate Current .....               | 15    | mA         |
| Equivalent Noise Resistance ..... | 300   | ohms       |

**MAXIMUM CIRCUIT VALUES**

|  |      |        |
|--|------|--------|
| Grid-Circuit Resistance .....              | 1.0  | megohm |
| Heater to Cathode Circuit Resistance ..... | 0.02 | megohm |



7CM

**SHARP-CUTOFF PENTODE**

**6DK6**  
3DK6, 4DK6, 12DK6


Miniature type used as if-amplifier tube in color and black-and-white television receivers. Outlines section, 5C; requires miniature 7-contact socket. Types 3DK6, 4DK6, and 12DK6 are identical with type 6DK6 except for heater ratings.

|  | 3DK6       | 4DK6       | 6DK6       | 12DK6      |         |
|--|------------|------------|------------|------------|---------|
| Heater Voltage (ac/dc) .....   | 3.15       | 4.2        | 6.3        | 12.6       | volts   |
| Heater Current .....   | 0.6        | 0.45       | 0.3        | 0.15       | ampere  |
| Heater Warm-up Time (Average) .....  | 11         | 11         | —          | —          | seconds |
| Heater-Cathode Voltage:  |            |            |            |            |         |
| Peak value .....   | { +200 max | { ±200 max | { ±200 max | { ±200 max | volts   |
| Average value .....  | { -300 max | { 100 max  | { 100 max  | { 100 max  | volts   |
| 100 max  |            |            |            |            |         |
| Direct Interelectrode Capacitances:  |            |            |            | 0.025 max  | pF      |
| Grid No.1 to Plate .....   |            |            |            |            |         |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3 and Internal Shield ..... |            |            |            | 6.3        | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....    |            |            |            | 1.9        | pF      |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value .....   | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 2.3                | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 0.55               | watt  |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

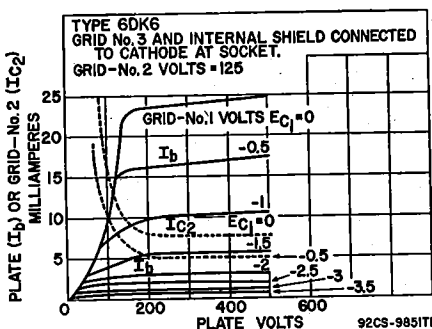

#### CHARACTERISTICS


|   |                                |            |
|---|--------------------------------|------------|
| Plate Supply Voltage .....  | 125                            | volts      |
| Grid No.3 .....   | Connected to cathode at socket |            |
| Grid-No.2 Supply Voltage .....                                    | 125                            | volts      |
| Cathode-Bias Resistor .....                                       | 56                             | ohms       |
| Plate Resistance (Approx.) .....                                  | 0.35                           | megohm     |
| Transconductance .....  | 9800                           | $\mu$ mhos |
| Plate Current .....   | 12                             | mA         |
| Grid-No.2 Current .....   | 3.8                            | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A ..... | -6.5                           | volts      |

## 6DL3

25DL3

### HALF-WAVE VACUUM RECTIFIER

Novar type used as a damper tube in television receivers. Outlines section, 35A; requires novar 9-contact socket. Socket terminals 1, 3, 6, 8, and 9 should not be used as tie points. Type 25DL3 is identical with type 6DL3 except for heater ratings.



9GD

|                                     |      |       |         |
|-------------------------------------|------|-------|---------|
| Heater Voltage (ac/dc)              | 6DL3 | 25DL3 |         |
| Heater Current                      | 6.3  | 25.2  | volts   |
| Heater Warm-up Time (average)       | 2.3  | 0.45  | ampere  |
| Direct Interelectrode Capacitances: | —    | 11    | seconds |
| Cathode to Plate and Heater         |      | 17    | pF      |
| Plate to Cathode and Heater         |      | 13    | pF      |
| Heater to Cathode                   |      | 4.4   | pF      |

**Damper Service**

For operation in a 525-line, 30-frame system

|                                     |      |       |       |
|-------------------------------------|------|-------|-------|
| Peak Inverse Plate Voltage#         | 6500 |       | volts |
| Peak Plate Current                  | 1800 |       | mA    |
| Average Plate Current               | 400  |       | mA    |
| Plate Dissipation                   | 11   |       | watts |
| Bulb Temperature (At hottest point) | 220  |       | °C    |
| Heater-Cathode Voltage:             |      |       |       |
| Peak value                          | +300 | -6500 | volts |
| Average value                       | +100 | -900  | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 800 mA | 25 | volts |
|---|----|-------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle.

Refer to chart at end of section.

**6DL4/EC88**

Refer to chart at end of section.

**6DL5  
6DL5/EL95**

Refer to chart at end of section.


**6DM4**

For replacement use type 6DM4A/6DA4.

**6DM4A**

**6DM4A/  
6DA4  
17DM4A**

**HALF-WAVE  
VACUUM RECTIFIER**



Glass octal type used as damper tube in horizontal-deflection circuits of television receivers. Outlines section, 13G; requires octal socket. Socket terminals 1, 2, 4, and 6 should not be used as tie points. This tube, like other power-handling tubes, should be adequately ventilated. Type 17DM4A is identical with type 6DM4A/6DA4 except for heater ratings.

|                               |            |        |         |
|-------------------------------|------------|--------|---------|
| Heater Voltage (ac/dc)        | 6DM4A/6DA4 | 17DM4A |         |
| Heater Current                | 6.3        | 16.8   | volts   |
| Heater Warm-up Time (Average) | 1.2        | 0.45   | amperes |
|                               | —          | 11     | seconds |

**Damper Service**

For operation in a 525-line, 30-frame system


**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |      |       |       |
|-----------------------------|------|-------|-------|
| Peak Inverse Plate Voltage# | 5000 |       | volts |
| Peak Plate Current          | 1200 |       | mA    |
| Average Plate Current       | 200  |       | mA    |
| Plate Dissipation           | 6.5  |       | watts |
| Heater-Cathode Voltage:     |      |       |       |
| Peak value                  | +300 | -5000 | volts |
| Average value               | +100 | -900  | volts |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

**6DN3****HALF-WAVE  
VACUUM RECTIFIER**

Novar type used as a damper diode in horizontal-deflection circuits of color television receivers. **Outlines section, 8G**; requires novar 9-contact socket. Terminals 1, 3, 6, and 8 should not be used as tie points for external-circuit components.

**9HP**

|                                     |     |         |
|-------------------------------------|-----|---------|
| Heater Voltage (ac/dc) .....        | 6.3 | volts   |
| Heater Current .....                | 2.4 | amperes |
| Direct Interelectrode Capacitances: |     |         |
| Plate to Cathode and Heater .....   | 13  | pF      |
| Cathode to Plate and Heater .....   | 16  | pF      |
| Heater to Cathode .....             | 4   | pF      |

**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |            |       |
|---|------------|-------|
| Peak Inverse Plate Voltage# .....         | 5500       | volts |
| Peak Plate Current .....                  | 2100       | mA    |
| Average Plate Current .....               | 350        | mA    |
| Plate Dissipation .....                   | 9          | watts |
| Bulb Temperature (At hottest point) ..... | 220        | °C    |
| Heater-Cathode Voltage:                   |            |       |
| Peak value .....                          | +300 —5500 | volts |
| Average value .....                       | +100 —900  | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 350 mA ..... | 14 | volts |
|---|----|-------|


# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

**6DN6**

Refer to chart at end of section.

**6DN7****MEDIUM-MU DUAL TRIODE**

Glass octal type used as combined vertical-deflection-oscillator and vertical-deflection-amplifier tube in television receivers. **Outlines section, 13B**; requires octal socket. Heater: volts (ac/dc), 6.3; amperes, 0.9; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**8BD****Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                                      | Unit No.1 | Unit No.2 |       |
|--|-----------|-----------|-------|
| Plate Voltage .....                                  | 250       | 250       | volts |
| Grid Voltage .....                                   | -8        | -9.5      | volts |
| Amplification Factor .....                           | 22.5      | 15.4      |       |
| Plate Resistance (Approx.) .....                     | 9000      | 2000      | ohms  |
| Transconductance .....                               | 2500      | 7700      | μmhos |
| Plate Current .....                                  | 8         | 41        | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA .. | -18       | —         | volts |
| Grid Voltage (Approx.) for plate current of 50 μA .. | —         | -23       | volts |

**Vertical-Deflection Oscillator and Amplifier**

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Maximum Values)  | Unit No.1<br>Oscillator | Unit No.2<br>Amplifier |       |
|--|-------------------------|------------------------|-------|
| DC Plate Voltage .....                   | 350                     | 550                    | volts |
| Peak Positive-Pulse Plate Voltage# ..... | —                       | 2500                   | volts |
| Peak Negative-Pulse Grid Voltage .....   | 400                     | 250                    | mA    |
| Peak Cathode Current .....               | —                       | 150                    | mA    |
| Average Cathode Current .....            | —                       | 50                     | mA    |
| Plate Dissipation .....                  | 1                       | 10                     | watts |


**MAXIMUM CIRCUIT VALUES**

|                                  |     |     |         |
|----------------------------------|-----|-----|---------|
| Grid-Circuit Resistance:         |     |     |         |
| For fixed-bias operation .....   | 2.2 | 2.2 | megohms |
| For cathode-bias operation ..... | 2.2 | —   | megohms |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

Refer to chart at end of section.

6DQ4



8JC

BEAM POWER TUBE

6DQ5

Glass octal type used as horizontal-deflection amplifier in color and black-and-white television receivers. Outlines section, 21B; requires octal socket.

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc)                                 | 6.3      | volts   |
| Heater Current   | 2.5      | amperes |
| Heater-Cathode Voltage:                                |          |         |
| Peak value   | ±200 max | volts   |
| Average value  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):          |          |         |
| Grid No.1 to Plate                                     | 0.5      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 23       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | 11       | pF      |



Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|  |      |       |     |       |
|--|------|-------|-----|-------|
| Plate Voltage                                | 70   | 175   | 125 | volts |
| Grid No.2 (Screen-Grid) Voltage              | 125  | 125   | —   | volts |
| Grid No.1 (Control-Grid) Voltage             | 0    | —25   | —25 | volts |
| Amplification Factor                         | —    | —     | 3.3 |       |
| Plate Resistance (Approx.)                   | —    | 5500  | —   | ohms  |
| Transconductance                             | —    | 10500 | —   | μmhos |
| Plate Current                                | 550* | 110   | —   | mA    |
| Grid-No.2 Current                            | 42*  | 5     | —   | mA    |
| Grid-No.1 Voltage (Approx.) for plate mA = 1 | —    | —55   | —   | volts |

\* Grid No.2 connected to plate.

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

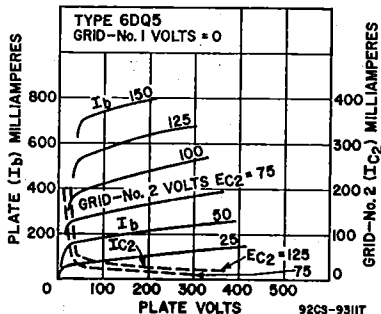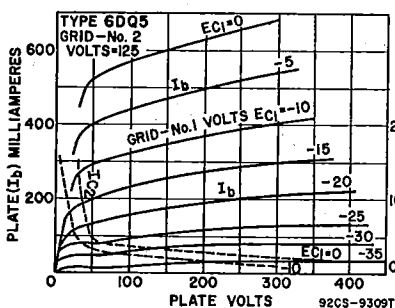

Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

MAXIMUM RATINGS (Design-Maximum Values)

|  |      |       |
|--|------|-------|
| DC Plate Voltage                                     | 990  | volts |
| Peak Positive-Pulse Plate Voltage#                   | 6500 | volts |
| Peak Negative-Pulse Plate Voltage                    | 1100 | volts |
| DC Grid-No.2 (Screen-Grid) Voltage                   | 190  | volts |
| Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage | 250  | volts |
| Peak Cathode Current                                 | 1100 | mA    |
| Average Cathode Current                              | 315  | mA    |
| Grid-No.2 Input                                      | 3.2  | watts |
| Plate Dissipation*                                   | 24   | watts |
| Bulb Temperature (At hottest point)                  | 220  | °C    |

**MAXIMUM CIRCUIT VALUE**

Grid-No.1-Circuit Resistance, for grid-resistor-bias operation . . . . . 0.47 megohm  
 # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).  
 \* A bias resistor or other means is required to protect the tube in absence of excitation.

**6DQ6A**

Refer to chart at end of section.

**6DQ6B**


For replacement use type 6GW6/6DQ6B.

**6DR7**

10DR7, 13DR7

**DUAL TRIODE**

Miniature type containing high-mu and low-mu triodes; used as combined vertical-deflection-oscillator and vertical-deflection-amplifier tube in television receivers. Outlines section, 6E; requires miniature 9-contact socket. Types 10DR7 and 13DR7 are identical with type 6DR7 except for heater ratings.





9HF

|   | 6DR7      | 10DR7     | 13DR7    |         |
|---|-----------|-----------|----------|---------|
| Heater Voltage (ac/dc)                        | 6.3       | 9.7       | 13       | volts   |
| Heater Current                                | 0.9       | 0.6       | 0.45     | ampere  |
| Heater Warm-up Time (Average)                 | —         | 11        | 11       | seconds |
| Heater-Cathode Voltage:                       |           |           |          |         |
| Peak value                                    | ±200 max  | ±200 max  | ±200 max | volts   |
| Average value                                 | 100 max   | 100 max   | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.): | Unit No.1 | Unit No.2 |          |         |
| Grid to Plate                                 | 4.5       | 8.5       |          | pF      |
| Grid to Cathode and Heater                    | 2.2       | 5.5       |          | pF      |
| Plate to Cathode and Heater                   | 0.34      | 1         |          | pF      |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|   | Unit No.1 | Unit No.2 |       |
|---|-----------|-----------|-------|
| Plate Voltage                                     | 250       | 150       | volts |
| Grid Voltage                                      | —3        | —17.5     | volts |
| Amplification Factor                              | 68        | 6         |       |
| Plate Resistance (Approx.)                        | 40000     | 925       | ohms  |
| Transconductance                                  | 1600      | 6500      | μmhos |
| Plate Current                                     | 1.4       | 35        | mA    |
| Plate Current for grid voltage of —24 volts       | —         | 10        | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA | —5.5      | —         | volts |
| Grid Voltage (Approx.) for plate current of 50 μA | —         | —44       | volts |

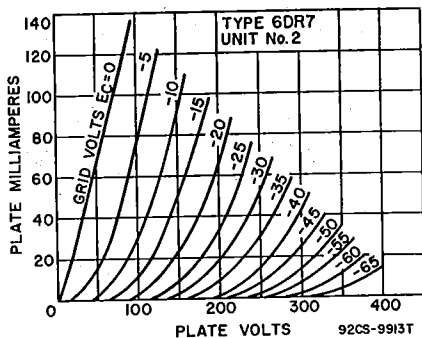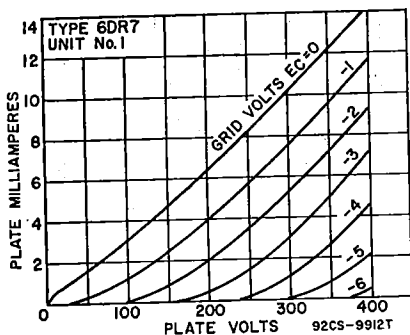

**Vertical-Deflection Oscillator and Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**


|                                    | Unit No.1<br>Oscillator Amplifier | Unit No.2<br>Amplifier |       |
|------------------------------------|-----------------------------------|------------------------|-------|
| DC Plate Voltage                   | 330                               | 275                    | volts |
| Peak Positive-Pulse Plate Voltage# | —                                 | 1500                   | volts |



|  |     |     |       |
|--|-----|-----|-------|
| Peak Negative-Pulse Grid Voltage ..... | 400 | 250 | volts |
| Peak Cathode Current .....             | 70  | 175 | mA    |
| Average Cathode Current .....          | 20  | 50  | mA    |
| Plate Dissipation .....                | 1   | 7   | watts |

**MAXIMUM CIRCUIT VALUES**

Grid-Circuit Resistance:  
 For grid-resistance-bias or cathode-bias operation 2.2 2.2 megohms  
 # Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).



INDEX = LARGE LUG  
 ● = PIN CUT OFF

12AQ

**6DS4**

2DS4

**HIGH-MU TRIODE**

Nuvistor type used as grounded-cathode, neutralized rf amplifier in vhf tuners of color and black-and-white television and FM receivers. Outlines section, 1; requires nuvistor socket. Type 2DS4 is identical with type 6DS4 except for heater ratings.

|                                     |          |          |         |
|-------------------------------------|----------|----------|---------|
| Heater Voltage (ac/dc) .....        | 2DS4     | 6DS4     |         |
| Heater Current .....                | 2.1      | 6.3      | volts   |
| Heater Warm-up Time (Average) ..... | 0.45     | 0.135    | ampere  |
| Peak Heater-Cathode Voltage .....   | 8        | —        | seconds |
|                                     | ±100 max | ±100 max | volts   |

**Direct Interelectrode Capacitances (Approx.)**

|   |      |    |
|---|------|----|
| Grid to Plate .....                       | 0.92 | pF |
| Grid to Cathode, Heater, and Shell .....  | 4.3  | pF |
| Plate to Cathode, Heater, and Shell ..... | 1.8  | pF |
| Plate to Cathode .....                    | 0.18 | pF |
| Heater to Cathode .....                   | 1.6  | pF |


**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| Plate Supply Voltage .....              | 300° | volts |
| Plate Voltage .....                     | 135  | volts |
| Grid Voltage, Negative-bias value ..... | 55   | volts |
| Grid Voltage, Peak positive value ..... | 0    | volts |
| Cathode Current .....                   | 15   | mA    |
| Plate Dissipation .....                 | 1.5  | watt  |

**CHARACTERISTICS**

|  |      |       |
|--|------|-------|
| Plate Supply Voltage .....                               | 110  | volts |
| Grid Supply Voltage .....                                | 0    | volts |
| Cathode-Bias Resistor .....                              | 130  | ohms  |
| Amplification Factor .....                               | 63   |       |
| Plate Resistance (Approx.) .....                         | 7000 | ohms  |
| Transconductance .....                                   | 9000 | μmhos |
| Plate Current .....                                      | 6.5  | mA    |
| Grid Voltage (Approx.) for plate current of 100 μA ..... | -5   | volts |
| Grid Voltage (Approx.) for plate current of 10 μA .....  | -6.8 | volts |

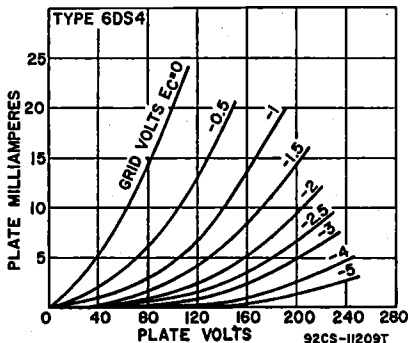

**TYPICAL OPERATION**

|                            |       |            |
|----------------------------|-------|------------|
| Plate Voltage              | 70    | volts      |
| Grid Supply Voltage        | 0     | volts      |
| Grid Resistor              | 47000 | ohms       |
| Amplification Factor       | 68    |            |
| Plate Resistance (Approx.) | 5440  | ohms       |
| Transconductance           | 12500 | $\mu$ mhos |
| Plate Current              | 7     | mA         |

**MAXIMUM CIRCUIT VALUES**

|                            |     |        |
|----------------------------|-----|--------|
| Grid-Circuit Resistance:   |     |        |
| For fixed-bias operation   | 0.5 | megohm |
| For cathode-bias operation | 2.2 | megohm |

° A plate supply voltage of 300 volts may be used provided a sufficiently large resistor is used in the plate circuit to limit the plate dissipation to 1.5 watts under any condition of operation.


▪ For operation at metal-shell temperatures up to 125°C.

**6DS5**

11DS5

**BEAM POWER TUBE**

Miniature type used in the audio output stages of television and radio receivers. Outlines section, 5D; requires miniature 7-contact socket. Type 11DS5 is identical with type 6DS5 except for heater ratings.




7BZ

|  |               |               |         |
|--|---------------|---------------|---------|
|  | <b>6DS5</b>   | <b>11DS5</b>  |         |
| Heater Voltage (ac/dc)                                 | 6.3           | 11.2          | volts   |
| Heater Current   | 0.8           | 0.45          | ampere  |
| Heater Warm-up Time                                    | —             | 11            | seconds |
| Peak Heater-Cathode Voltage                            | $\pm 200$ max | $\pm 200$ max | volts   |
| Direct Interelectrode Capacitances (Approx.):          |               |               |         |
| Grid No.1 to Plate                                     |               | 0.19          | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 |               | 9.5           | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     |               | 6.3           | pF      |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage   | 275 | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 275 | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0   | volts |
| Plate Dissipation                                     | 9   | watts |
| Grid-No.2 Input                                       | 2.2 | watts |
| Bulb Temperature (At hottest point)                   | 250 | °C    |

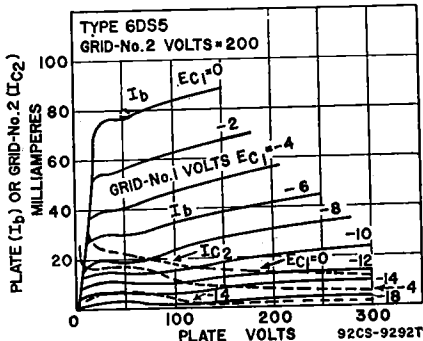


**TYPICAL OPERATION AND CHARACTERISTICS**

|                          |                               |     |                             |      |       |
|--------------------------|-------------------------------|-----|-----------------------------|------|-------|
|                          | <b>Cathode-Bias Operation</b> |     | <b>Fixed-Bias Operation</b> |      |       |
| Plate Supply Voltage     | 200                           | 250 | 200                         | 250  | volts |
| Grid-No.2 Supply Voltage | 200                           | 200 | 200                         | 200  | volts |
| Grid-No.1 Voltage        | —                             | —   | -7.5                        | -8.5 |       |
| Cathode-Bias Resistor    | 180                           | 270 | —                           | —    | ohms  |

|                                  |       |       |       |       |          |
|----------------------------------|-------|-------|-------|-------|----------|
| Peak AF Grid-No.1 Voltage        | 7.5   | 9.2   | 7.5   | 8.5   | volts    |
| Zero-Signal Plate Current        | 34.5  | 27    | 35    | 29    | mA       |
| Maximum-Signal Plate Current     | 32.5  | 25    | 36    | 32    | mA       |
| Zero-Signal Grid-No.2 Current    | 3.5   | 3     | 3     | 3     | mA       |
| Maximum-Signal Grid-No.2 Current | 9     | 9     | 9     | 10    | mA       |
| Plate Resistance (Approx.)       | 28000 | 28000 | 28000 | 28000 | ohms     |
| Transconductance                 | 6000  | 5800  | 6000  | 5800  | μmhos    |
| Load Resistance                  | 6000  | 8000  | 6000  | 8000  | ohms     |
| Total Harmonic Distortion        | 10    | 10    | 9     | 10    | per cent |
| Maximum-Signal Power Output      | 2.8   | 3.6   | 3     | 3.8   | watts    |

**MAXIMUM CIRCUIT VALUES**

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 1   | megohm |



**BEAM POWER TUBE**

**6DT5**  
12DT5

Miniature type used as a vertical-deflection-amplifier tube in television receivers employing 110-degree picture-tube systems. Outlines section, 6E; requires miniature 9-contact socket. Type 12DT5 is identical with type 6DT5 except for heater ratings.

|                               |           |             |         |
|-------------------------------|-----------|-------------|---------|
| Heater Voltage (ac/dc)        | 6DT5: 6.3 | 12DT5: 12.6 | volts   |
| Heater Current                | 1.2       | 0.6         | amperes |
| Heater Warm-up Time (Average) | —         | 11          | seconds |
| Heater-Cathode Voltage:       |           |             |         |
| Peak value                    | ±200 max  | ±200 max    | volts   |
| Average value                 | 100 max   | 100 max     | volts   |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|   |      |      |       |       |
|---|------|------|-------|-------|
| Plate Voltage   | 60   | 80   | 250   | volts |
| Grid-No. 2 Voltage                                      | 150  | 250  | 250   | volts |
| Grid-No.1 Voltage                                       | 0    | —    | —16.5 | volts |
| Transconductance  | —    | —    | 6200  | μmhos |
| Plate Current   | 95*  | 195* | 44    | mA    |
| Grid-No.2 Current                                       | 8.5* | 19*  | 1.5   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 mA | —    | —    | —35   | volts |

\* These values can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Vertical-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |      |       |
|--|------|-------|
| DC Plate Voltage                                     | 315  | volts |
| Peak Positive-Pulse Plate Voltage#                   | 2200 | volts |
| Grid-No.2 (Screen-Grid) Voltage                      | 285  | volts |
| Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage | 250  | volts |
| Peak Cathode Current                                 | 190  | mA    |
| Average Cathode Current                              | 55   | mA    |
| Plate Dissipation                                    | 9    | watts |
| Grid-No.2 Input                                      | 2    | watts |

**MAXIMUM CIRCUIT VALUES**

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.5 | megohm |
| For cathode-bias operation    | 1   | megohm |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

Refer to chart at end of section.


**6DT6**

**6DT6A**

3DT6A, 4DT6A

**SHARP-CUTOFF PENTODE**

Miniature type used as FM detector in color and black-and-white television receivers. Outlines section, 5C; requires miniature 7-contact socket. Types 3DT6A and 4DT6A are identical with type 6DT6A except for heater ratings.

**7EN**

|   | 3DT6A    | 4DT6A    | 6DT6A    |         |
|---|----------|----------|----------|---------|
| Heater Voltage (ac/dc) .....  | 3.15     | 4.2      | 6.3      | volts   |
| Heater Current .....  | 0.6      | 0.45     | 0.3      | ampere  |
| Heater Warm-up Time (Average) .....   | 11       | 11       | —        | seconds |
| <b>Heater-Cathode Voltage:</b>  |          |          |          |         |
| Peak value .....  | ±200 max | ±200 max | ±200 max | volts   |
| Average value .....   | 100 max  | 100 max  | 100 max  | volts   |
| <b>Direct Interelectrode Capacitances (Approx.)*</b>                          |          |          |          |         |
| Grid No.1 to Plate .....  |          |          | 0.02     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... |          |          | 5.8      | pF      |
| Grid No.3 to Plate .....  |          |          | 1.7      | pF      |
| Grid No.1 to Grid No.3 .....  |          |          | 0.1      | pF      |
| Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2, and Internal Shield ..... |          |          | 6.1      | pF      |

\* External shield connected to cathode.

**Class A<sub>1</sub> Amplifier****CHARACTERISTICS**

|  |                                |        |
|--|--------------------------------|--------|
| Plate Supply Voltage .....                                   | 150                            | volts  |
| Grid No.3 (Suppressor Grid) .....                            | Connected to cathode at socket |        |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                 | 100                            | volts  |
| Cathode-Bias Resistor .....                                  | 560                            | ohms   |
| Plate Resistance (Approx.) .....                             | 0.15                           | megohm |
| Transconductance, Grid No.1 to Plate .....                   | 1350                           | μmhos  |
| Transconductance, Grid No.3 to Plate .....                   | 515                            | μmhos  |
| Plate Current .....  | 1.55                           | mA     |
| Grid-No.2 Current .....                                      | 1.8                            | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA ..... | —5.2                           | volts  |
| Grid-No.3 Voltage (Approx.) for plate current of 10 μA ..... | —4.2                           | volts  |

**FM Detector****MAXIMUM RATINGS (Design-Maximum Values)**

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid-No.3 Voltage .....                                     | 28                 | volts |
| Grid-No.2 Supply Voltage .....                              | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 1.7                | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 1.1                | watts |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

**MAXIMUM CIRCUIT VALUES**


|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 0.5  | megohm |

**6DT8**

12DT8


**HIGH-MU TWIN TRIODE**

Miniature type used in radio and television receiver applications and in push-pull rf amplifiers or as frequency converter in FM tuners. Outlines section, 6B; requires miniature 9-contact socket. Type 12DT8 is identical with type 6DT8 except for the heater ratings. Except for heater and heater-cathode ratings, interelectrode capacitances, and basing arrangement, these types are identical with miniature type 12AT7.

**9AJ**

|  |          |          |        |
|--|----------|----------|--------|
| Heater Voltage (ac/dc) .....   | 6DT8     | 12DT8    |        |
| Heater Current .....   | 6.3      | 12.6     | volts  |
| Heater-Cathode Voltage:  | 0.3      | 0.15     | ampere |
| Peak value .....   | ±200 max | ±200 max | volts  |
| Average value .....  | 100 max  | 100 max  | volts  |
| Direct Interelectrode Capacitances (Approx., Each Unit Except as Noted): |          |          |        |
| Grid to Plate .....  |          | 1.6*     | pF     |
| Grid to Cathode, Heater, and Internal Shield .....                       |          | 2.7*     | pF     |
| Plate to Cathode, Heater, and Internal Shield .....                      |          | 1.6*     | pF     |
| Heater to Cathode .....  |          | 3*       | pF     |
| Cathode to Grid, Heater, and Internal Shield (Unit No.2) .....           |          | 5.3†     | pF     |
| Plate to Grid, Heater, and Internal Shield (Unit No.2) .....             |          | 2.8†     | pF     |

- † With external shield connected to grid of unit under test.
- With external shield connected to ground.
- \* With external shield connected to cathode of unit under test.



INDEX = LARGE LUG  
• = SHORT PIN

12EA

MEDIUM-MU TRIODE

6DV4

2DV4

Nuvistor type used at frequencies up to 1000 MHz in uhf oscillator stages of color and black-and-white television receivers. Outlines section, 1; requires nuvistor socket. Type 2DV4 is identical with type 6DV4 except for heater ratings.

|  |          |          |         |
|--|----------|----------|---------|
| Heater Voltage (ac/dc) .....                 | 2DV4     | 6DV4     |         |
| Heater Current .....                         | 2.1      | 6.3      | volts   |
| Heater Warm-up Time (Average) .....          | 0.45     | 0.135    | ampere  |
| Peak Heater-Cathode Voltage .....            | 8        | —        | seconds |
| Direct Interelectrode Capacitance (Approx.): | ±100 max | ±100 max | volts   |
| Grid to Plate .....                          |          | 1.8      | pF      |
| Grid to Cathode, Heater, and Shell .....     |          | 4.4      | pF      |
| Plate to Cathode, Heater, and Shell .....    |          | 1.9      | pF      |
| Plate to Cathode .....                       |          | 0.25     | pF      |
| Heater to Cathode .....                      |          | 1.4      | pF      |
| Grid to Cathode .....                        |          | 3.7      | pF      |

Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Maximum Values)


|                            |     |       |
|----------------------------|-----|-------|
| Plate Supply Voltage ..... | 300 | volts |
| Plate Voltage .....        | 125 | volts |
| Grid Voltage:              |     |       |
| Negative-bias value .....  |     |       |
| Peak positive value .....  | 55  | volts |
| Plate Dissipation .....    | 2   | volts |
| Cathode Current .....      | 1   | watt  |
|                            | 15  | mA    |

CHARACTERISTICS

|   |       |       |
|---|-------|-------|
| Plate Supply Voltage .....                              | 75    | volts |
| Cathode-Bias Resistor .....                             | 100   | ohms  |
| Amplification Factor .....                              | 35    |       |
| Plate Resistance (Approx.) .....                        | 3100  | ohms  |
| Transconductance .....                                  | 11500 | μmhos |
| Plate Current .....                                     | 10.5  | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA ..... | -7    | volts |

TYPICAL OPERATION AS OSCILLATOR AT 950 MHz

|                     |      |       |
|---------------------|------|-------|
| Plate Voltage ..... | 60   | volts |
| Grid Voltage .....  | -2   | volts |
| Grid Resistor ..... | 5600 | ohms  |
| Plate Current ..... | 8    | mA    |
| Grid Current .....  | 350  | μA    |

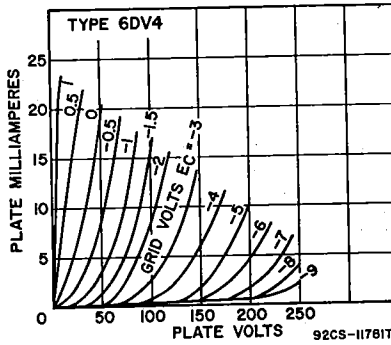

**MAXIMUM CIRCUIT VALUES**

Grid-Circuit Resistance:\*

|                                  |     |        |
|----------------------------------|-----|--------|
| For fixed-bias operation .....   | 0.1 | megohm |
| For cathode-bias operation ..... | 0.2 | megohm |

\* For operation at metal-shell temperatures up to 135°C.


**6DW4**  
**6DW4A**

Refer to chart at end of section.

**6DW4B**

**HALF-WAVE  
VACUUM RECTIFIER**

Novar types used as damper tubes in horizontal-deflection circuits of color and black-and-white television receivers. Outlines section, 11D and 30B, respectively; require novar 9-contact socket. Socket terminals 1, 3, 6, and 8 should not be used as tie points; it is recommended that socket clips for these pins be removed to reduce the possibility of arc-over and to minimize leakage. These tubes, like other power-handling tubes, should be adequately ventilated.



|   |     |         |
|---|-----|---------|
| Heater Voltage (ac/dc) .....                  | 6.3 | volts   |
| Heater Current .....                          | 1.2 | amperes |
| Direct Interelectrode Capacitances (Approx.): |     |         |
| Plate to Cathode and Heater .....             | 6.5 | pF      |
| Cathode to Plate and Heater .....             | 9   | pF      |
| Heater to Cathode .....                       | 2.8 | pF      |

**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |            |       |
|-----------------------------------|------------|-------|
| Peak Inverse Plate Voltage# ..... | 5500       | volts |
| Peak Plate Current .....          | 1300       | mA    |
| Average Plate Current .....       | 250        | mA    |
| Plate Dissipation .....           | 8.5        | watts |
| Heater-Cathode Voltage:           |            |       |
| Peak value .....                  | +300 -5000 | volts |
| Average value .....               | +100 -900  | volts |

**CHARACTERISTIC, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 350 mA ..... | 25 | volts |
|---|----|-------|


# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

**6DW5**

Refer to chart at end of section.

**6DX8**

Refer to chart at end of section.



9HX

**HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6DX8/  
ECL84**

10DX8/LCL84

Miniature type used in color and black-and-white television-receiver applications. The triode unit is used as a sync-separator, sync-amplifier, keyed-agc, or noise-suppressor tube. The pentode unit is used as a video-output tube. Outlines section, 6E; requires miniature 9-contact socket. Type 10DX8/LCL84 is identical with type 6DX8/ECL84 except for heater ratings.

|                                   |            |             |        |
|-----------------------------------|------------|-------------|--------|
| Heater Voltage (ac/dc) .....      | 6DX8/ECL84 | 10DX8/LCL84 | volts  |
| Heater Current .....              | 6.3        | 10.2        | ampere |
| Peak Heater-Cathode Voltage ..... | 0.72       | 0.45        | volts  |
|                                   | ±200 max   | ±200 max    |        |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**

|  | Triode Unit | Pentode Unit |       |
|--|-------------|--------------|-------|
| Plate Supply Voltage .....                                     | 550         | 550          | volts |
| Peak Plate Voltage, with maximum plate current of 0.1 mA ..... | 600         | —            | volts |
| Plate Voltage .....  | 300         | 300          | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                   | —           | 550          | volts |
| Grid-No.2 Voltage .....  | —           | 300          | volts |
| Cathode Current .....  | 12          | 40           | mA    |
| Plate Dissipation .....  | 1           | 4            | watts |
| Grid-No.2 Input .....  | —           | 1.7          | watts |


**CHARACTERISTICS**

|   | Triode Unit |       | Pentode Unit |       |        |
|---|-------------|-------|--------------|-------|--------|
| Plate Voltage .....                     | 200         | 170   | 200          | 220   | volts  |
| Grid-No.2 Voltage .....                 | —           | 170   | 200          | 220   | volts  |
| Grid No.1 Voltage .....                 | -1.7        | -2.1  | -2.9         | -3.4  | volts  |
| Amplification Factor .....              | 65          | —     | —            | —     |        |
| Mu-Factor, Grid-No.2 to Grid-No.1 ..... | —           | 36    | 36           | 36    |        |
| Plate Resistance (Approx.) .....        | —           | 0.1   | 0.13         | 0.15  | megohm |
| Transconductance .....                  | 4000        | 11000 | 10400        | 10000 | μmhos  |
| Plate Current .....                     | 3           | 18    | 18           | 18    | mA     |
| Grid-No.2 Current .....                 | —           | 3     | 3            | 3     | mA     |

**MAXIMUM CIRCUIT VALUES**

|                                  | Triode Unit | Pentode Unit |         |
|----------------------------------|-------------|--------------|---------|
| Grid-No.1- Circuit Resistance:   |             |              |         |
| For fixed-bias operation .....   | 1           | 1            | megohm  |
| For cathode-bias operation ..... | 3           | 2            | megohms |

• With maximum duty factor of 0.18 and maximum pulse duration of 18 microseconds.



7DK

**MEDIUM-MU TRIODE**

**6DZ4**

Miniature type used as a local-oscillator tube in uhf color and black-and-white television receivers covering the frequency range from 470 to 890 MHz. Outlines section, 5B; requires miniature 7-contact socket. For curve of average plate characteristics, refer to type 6AF4A.

|   |         |        |
|---|---------|--------|
| Heater Voltage (ac/dc) .....                    | 6.3     | volts  |
| Heater Current .....                            | 0.225   | ampere |
| Heater-Cathode Voltage:                         |         |        |
| Peak value .....                                | ±50 max | volts  |
| Average value .....                             | 25 max  | volts  |
| Direct Inter-electrode Capacitances (Approx.):* |         |        |
| Grid to Plate .....                             | 1.8     | pF     |
| Grid to Cathode and Heater .....                | 2.2     | pF     |
| Plate to Cathode and Heater .....               | 1.3     | pF     |

\* With external shield connected to cathode.

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|  |      |            |
|--|------|------------|
| Plate Supply Voltage .....                                   | 80   | volts      |
| Plate Resistor .....   | 2700 | ohms       |
| Amplification Factor .....                                   | 14   |            |
| Plate Resistance (Approx.) .....                             | 2000 | ohms       |
| Transconductance .....                                       | 6700 | $\mu$ mhos |
| Plate Current .....  | 15   | mA         |
| Grid Voltage (Approx.) for plate current of 20 $\mu$ A ..... | -11  | volts      |

## UHF Oscillator

## MAXIMUM RATINGS (Design-Maximum Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 135 | volts |
| Grid Voltage, Negative-bias value ..... | 50  | volts |
| Grid Current .....                      | 2   | mA    |
| Cathode Current .....                   | 20  | mA    |
| Plate Dissipation .....                 | 2.3 | watts |

## TYPICAL OPERATION AS OSCILLATOR AT 1000 MHZ

|                                |       |         |
|--------------------------------|-------|---------|
| Plate Supply Voltage .....     | 135   | volts   |
| Plate-Circuit Resistance ..... | 2700  | ohms    |
| Grid Resistor .....            | 10000 | ohms    |
| Plate Current .....            | 15.5  | mA      |
| Grid Current (Approx.) .....   | 800   | $\mu$ A |

## MAXIMUM CIRCUIT VALUES

|                                  |     |                 |
|----------------------------------|-----|-----------------|
| Grid-Circuit Resistance:         |     |                 |
| For fixed-bias operation .....   |     | Not recommended |
| For cathode-bias operation ..... | 0.5 | megohm          |


6DZ7

Refer to chart at end of section.

6E5

## ELECTRON-RAY TUBE

Glass type used to indicate the effects of a change in a controlling voltage. It is used to indicate accurate radio-receiver tuning. Outlines section, 13H; requires 6-contact socket. Heater: volts (ac/dc), 6.3; amperes, 0.3. For additional considerations, refer to Tuning Indication with Electron-Ray Tubes in Electron Tube Applications section.



6R

## Tuning Indicator

## MAXIMUM AND MINIMUM RATINGS (Design-Center Values)

|                            |           |       |
|----------------------------|-----------|-------|
| Plate-Supply Voltage ..... | 250 max   | volts |
| Target Voltage .....       | { 250 max | volts |
|                            | { 125 min | volts |

## TYPICAL OPERATION

|                                       |      |      |        |
|---------------------------------------|------|------|--------|
| Plate and Target Supply Voltage ..... | 200  | 250  | volts  |
| Series Triode-Plate Resistor .....    | 1    | 1    | megohm |
| Target Current*† .....                | 3    | 4    | mA     |
| Triode-Plate Current* .....           | 0.19 | 0.24 | mA     |
| Triode-Grid Voltage (Approx.):        |      |      |        |
| For shadow angle of 0° .....          | -6.5 | -8   | volts  |
| For shadow angle of 90° .....         | 0    | 0    | volts  |

\* For zero triode-grid voltage.

† Subject to wide variations.

6E6

Refer to chart at end of section.

6E7

Refer to chart at end of section.

6EA4

Refer to chart at end of section.


6EA5

Refer to chart at end of section.  
For replacement use type 6CY5.



Refer to chart at end of section.  
For replacement use type 6EM7/6EA7.

6EA7



9AE

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6EA8**

5EA8, 19EA8

Miniature type used as combined oscillator and mixer in color and black-and-white television receivers utilizing an intermediate frequency in the order of 40 MHz. Outlines section, 6B; requires miniature 9-contact socket. Types 5EA8 and 19EA8 are identical with type 6EA8 except for heater ratings.

|                                | 5EA8     | 6EA8     | 19EA8    |         |
|--------------------------------|----------|----------|----------|---------|
| Heater Voltage (ac/dc)         | 4.7      | 6.3      | 18.9     | volts   |
| Heater Current                 | 0.6      | 0.45     | 0.15     | ampere  |
| Heater Warm-up Time (Average)  | 11       | 11       | 11       | seconds |
| <b>Heater-Cathode Voltage:</b> |          |          |          |         |
| Peak value                     | ±200 max | ±200 max | ±200 max | volts   |
| Average value                  | 100 max  | 100 max  | 100 max  | volts   |

**Unshielded Shielded**

Direct Interelectrode Capacitances:

|   | Unshielded | Shielded |    |
|---|------------|----------|----|
| <b>Triode Unit:</b>   |            |          |    |
| Grid to Plate   | 1.7        | 1.7      | pF |
| Grid to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield  | 3          | 3.2      | pF |
| Plate to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield | 1.4        | 1.9      | pF |
| Cathode to Heater   | 3          | 3*       | pF |
| <b>Pentode Unit:</b>  |            |          |    |
| Grid No.1 to Plate  | 0.02 max   | 0.01 max | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield           | 5          | 5        | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield               | 2.6        | 3.4      | pF |
| Heater to Cathode   | 3          | 3*       | pF |

\* With external shield connected to cathode of unit under test except as noted.

■ With external shield connected to ground.



**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |                      |
|---|----------------------|
| Plate Voltage   | 330                  |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —                    |
| Grid-No.2 Voltage                                     | — See curve page 300 |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0                    |
| Plate Dissipation                                     | 2.5                  |
| Grid-No.2 Input:                                      |                      |
| For grid-No.2 voltages up to 165 volts                | —                    |
| For grid-No.2 voltages between 165 and 330 volts      | 0.55                 |

**Triode Unit Pentode Unit**

|     |                    |       |
|-----|--------------------|-------|
| 330 | 330                | volts |
| —   | 330                | volts |
| —   | See curve page 300 |       |
| 0   | 0                  | volts |
| 2.5 | 3.1                | watts |
| —   | 0.55               | watt  |
| —   | See curve page 300 |       |

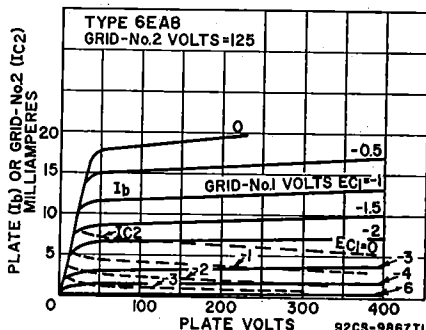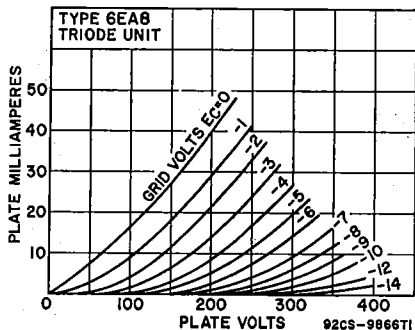


**CHARACTERISTICS**

|   |      |        |            |
|---|------|--------|------------|
| Plate Supply Voltage                              | 150  | 125    | volts      |
| Grid-No.2 Voltage                                 | —    | 125    | volts      |
| Grid-No.1 Voltage                                 | —    | -1     | volt       |
| Cathode-Bias Resistor                             | 56   | —      | ohms       |
| Amplification Factor                              | 40   | —      |            |
| Plate Resistance (Approx.)                        | 5000 | 200000 | ohms       |
| Transconductance                                  | 8500 | 6400   | $\mu$ mhos |
| Plate Current                                     | 18   | 12     | mA         |
| Grid-No.2 Current                                 | —    | 4      | mA         |
| Grid-No.1 Voltage for plate current of 10 $\mu$ A | -12  | -9     | volts      |

**6EB8****HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used in color and black-and-white television receiver applications. Pentode unit is used as video output amplifier; triode unit is used in sync-separator, sync-clipper, and phase-inverter circuits. Outlines section, 6E; requires miniature 9-contact socket.



|   |               |        |
|---|---------------|--------|
| Heater Voltage (ac/dc)  | 6.3           | volts  |
| Heater Current  | 0.75          | ampere |
| Heater-Cathode Voltage:   |               |        |
| Peak value  | $\pm 200$ max | volts  |
| Average value   | 100 max       | volts  |
| Direct Interelectrode Capacitances:                                     |               |        |
| Triode Unit:  |               |        |
| Grid to Plate   | 4.4           | pF     |
| Grid to Cathode and Heater  | 2.4           | pF     |
| Plate to Cathode and Heater   | 0.36          | pF     |
| Pentode Unit:   |               |        |
| Grid No.1 to Plate  | 0.1 max       | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 11            | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 4.2           | pF     |
| Triode Grid to Pentode Plate  | 0.018 max     | pF     |
| Pentode Grid No.1 to Triode Plate                                       | 0.005 max     | pF     |
| Pentode Plate to Triode Plate   | 0.17 max      | pF     |

**Class A<sub>1</sub> Amplifier**


|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>        |             |                    |       |
| Plate Voltage   | 330         | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —           | 330                | volts |
| Grid-No.2 Voltage                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0                  | volts |
| Plate Dissipation                                     | 1           | 5                  | watts |
| Grid-No.2 Input:                                      |             |                    |       |
| For grid-No.2 voltages up to 165 volts                | —           | 1.1                | watts |
| For grid-No.2 voltages between 165 and 330 volts      | —           | See curve page 300 |       |

**CHARACTERISTICS**

|  |       |       |            |
|--|-------|-------|------------|
| Plate Supply Voltage   | 250   | 200   | volts      |
| Grid-No.2 Supply Voltage                                     | —     | 125   | volts      |
| Grid Voltage   | -2    | —     | volts      |
| Cathode-Bias Resistor  | —     | 68    | ohms       |
| Amplification Factor   | 100   | —     |            |
| Plate Resistance (Approx.)                                   | 37000 | 75000 | ohms       |
| Transconductance   | 2700  | 12500 | $\mu$ mhos |
| Plate Current  | 2     | 25    | mA         |
| Grid-No.2 Current  | —     | 7     | mA         |
| Grid Voltage (Approx.) for plate current of 20 $\mu$ A       | -5    | —     | volts      |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A | —     | -9    | volts      |


**MAXIMUM CIRCUIT VALUES**

|                               |     |      |        |
|-------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance: |     |      |        |
| For fixed-bias operation      | 0.5 | 0.25 | megohm |
| For cathode-bias operation    | 1   | 1    | megohm |

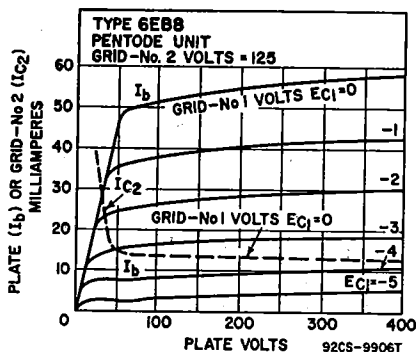

Refer to chart at end of section.

Refer to chart at end of section.

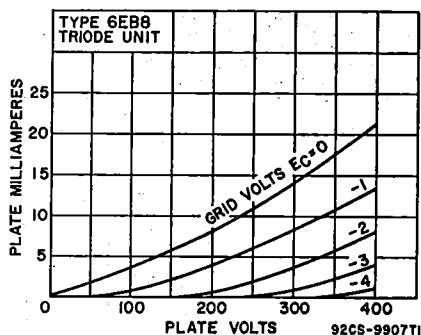


6EC4A/EY500

6EH4


BEAM TRIODE

6EH4A



12FA

Duodec type used as a shunt regulator in the high-voltage power supply of color television receivers. Outlines section, 16G; requires duodec 12-contact socket. For high-voltage and X-ray safety considerations, refer to page 93. This type is electrically identical with type 6EJ4A.



7CV

POWER PENTODE

6EH5

25EH5, 50EH5

Miniature type used in the audio output stage of radio and television receivers and in phonographs. Outlines section, 5D; requires miniature 7-contact socket. Types 25EH5 and 50EH5 are identical with type 6EH5 except for heater ratings.

|  |          |          |          |        |
|--|----------|----------|----------|--------|
| Heater Voltage (ac/dc)                                 | 6EH5     | 25EH5    | 50EH5    |        |
| Heater Current   | 6.3      | 25       | 50       | volts  |
| Heater-Cathode Voltage:                                | 1.2      | 0.3      | 0.15     | ampere |
| Peak value   | ±200 max | ±200 max | ±200 max | volts  |
| Average value  | 100 max  | 100 max  | 100 max  | volts  |
| Direct Interelectrode Capacitances (Approx.):          |          |          |          |        |
| Grid No.1 to Plate                                     |          |          | 0.65     | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 |          |          | 17       | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     |          |          | 9        | pF     |

Class A<sub>1</sub> Amplifier


MAXIMUM RATINGS (Design-Maximum Values)

|                                     |     |       |
|-------------------------------------|-----|-------|
| Plate Voltage                       | 150 | volts |
| Grid-No.2 (Screen-Grid) Voltage     | 130 | volts |
| Plate Dissipation                   | 5.5 | watts |
| Grid-No.2 Input                     | 2   | watts |
| Bulb Temperature (At hottest point) | 220 | °C    |

TYPICAL OPERATION

|                           |     |       |
|---------------------------|-----|-------|
| Plate Supply Voltage      | 110 | volts |
| Grid-No.2 Supply Voltage  | 115 | volts |
| Cathode-Bias Resistor     | 62  | ohms  |
| Peak AF Grid-No.1 Voltage | 3   | volts |

|  |       |            |
|--|-------|------------|
| Zero-Signal Plate Current .....        | 42    | mA         |
| Maximum-Signal Plate Current .....     | 42    | mA         |
| Zero-Signal Grid-No.2 Current .....    | 11.5  | mA         |
| Maximum-Signal Grid-No.2 Current ..... | 14.5  | mA         |
| Plate Resistance (Approx.) .....       | 11000 | ohms       |
| Transconductance .....                 | 14600 | $\mu$ mhos |
| Load Resistance .....                  | 3000  | ohms       |
| Total Harmonic Distortion .....        | 7     | per cent   |
| Maximum-Signal Power Output .....      | 1.4   | watts      |

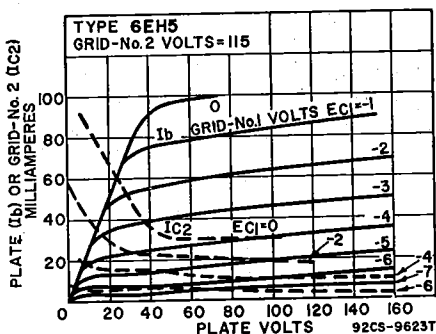**MAXIMUM CIRCUIT VALUES**

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |        |
| For fixed-bias operation .....   | 0.1 | megohm |
| For cathode-bias operation ..... | 0.5 | megohm |

**Push-Pull Class AB<sub>1</sub> Audio-Frequency Power Amplifier**

**MAXIMUM RATINGS** (Same as for Class A<sub>1</sub> audio-frequency power amplifier)

**TYPICAL OPERATION** (Values are for two tubes)

|  |      |          |
|--|------|----------|
| Plate Supply Voltage .....                       | 140  | volts    |
| Grid-No.2 Supply Voltage .....                   | 120  | volts    |
| Cathode-Bias Resistor .....                      | 88   | ohms     |
| Peak AF Grid-No.1 Voltage .....                  | 9.4  | volts    |
| Zero-Signal Plate Current .....                  | 47   | mA       |
| Maximum-Signal Plate Current .....               | 51   | mA       |
| Zero-Signal Grid-No.2 Current .....              | 11   | mA       |
| Maximum-Signal Grid-No.2 Current .....           | 17.7 | mA       |
| Effective Load Resistance (Plate-to-plate) ..... | 6000 | ohms     |
| Total Harmonic Distortion .....                  | 5    | per cent |
| Maximum-Signal Power Output .....                | 3.8  | watts    |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |        |
| For fixed-bias operation .....   | 0.1 | megohm |
| For cathode-bias operation ..... | 0.5 | megohm |


**6EH7**

Refer to chart at end of section.

**6EH7/  
EF183**

3EH7/XF183,  
4EH7/LF183

**SEMIREMOTE-CUTOFF  
PENTODE**

**9AQ**

Miniature types used as if-amplifier tubes in color and black-and-white television receivers. Outlines section, 6C; requires miniature 9-contact socket. Types 3EH7/XF183 and 4EH7/LF183 are identical with type 6EH7/EF183 except for heater ratings.

|  | 3EH7/<br>XF183 | 4EH7/<br>LF183 | 6EH7/<br>EF183 |        |
|--|----------------|----------------|----------------|--------|
| Heater Voltage (ac/dc) .....   | 3.4            | 4.4            | 6.3            | volts  |
| Heater Current .....   | 0.6            | 0.45           | 0.3            | ampere |
| Peak Heater-Cathode Voltage .....  | ±150 max       | ±150 max       | ±150 max       | volts  |
| Direct Interelectrode Capacitances:  |                |                |                |        |
| Grid No.1 to Plate .....   |                |                | 0.005 max      | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and<br>Internal Shield ..... |                |                | 9              | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and<br>Internal Shield .....     |                |                | 3              | pF     |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**

|   |      |       |
|---|------|-------|
| Plate Supply Voltage .....                                | 550  | volts |
| Plate Voltage .....                                       | 250  | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value ..... | 0    | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....              | 550  | volts |
| Grid-No.2 Voltage .....                                   | 250  | volts |
| Cathode Current .....                                     | 20   | mA    |
| Plate Dissipation .....                                   | 2.5  | watts |
| Grid-No.2 Input .....                                     | 0.65 | watt  |

**CHARACTERISTICS**

|                                  |                                |        |
|----------------------------------|--------------------------------|--------|
| Plate Voltage .....              | 200                            | volts  |
| Grid No.3 .....                  | Connected to cathode at socket |        |
| Grid-No.2 Voltage .....          | 90                             | volts  |
| Grid-No.1 Voltage .....          | -2                             | volts  |
| Plate Resistance (Approx.) ..... | 0.5                            | megohm |
| Transconductance .....           | 12500                          | μmhos  |
| Plate Current .....              | 12                             | mA     |
| Grid-No.2 Current .....          | 4.5                            | mA     |

**TYPICAL OPERATION**

|   |                                |       |       |       |       |
|---|--------------------------------|-------|-------|-------|-------|
| Plate Voltage .....   | 200                            | 200   | 200   | 200   | volts |
| Grid No.3 .....   | Connected to cathode at socket |       |       |       |       |
| Grid-No.2 Supply Voltage .....                                      | 200                            | 200   | 200   | 200   | volts |
| Grid-No.2 Series Resistor .....                                     | 22000                          | 22000 | 22000 | 22000 | ohms  |
| Grid-No.1 Voltage .....   | -19.5                          | -9.5  | -6.5  | -2    | volts |
| Transconductance .....  | 125                            | 625   | 1250  | 12500 | μmhos |
| RMS Grid-No.1 Voltage, for<br>cross-modulation factor of 0.01 ..... | 450                            | 160   | 100   | —     | mV    |

**MAXIMUM CIRCUIT VALUE**

|                                    |   |        |
|------------------------------------|---|--------|
| Grid-No.1-Circuit Resistance ..... | 1 | megohm |
|------------------------------------|---|--------|

Refer to chart at end of section.

**6EH8**

Refer to chart at end of section.

**6EJ4A**


Refer to chart at end of section.

**6EJ7**

**6EJ7/  
EF184**

3EJ7/XF184,  
4EJ7/LF184

**SHARP-CUTOFF PENTODE**



9AQ

Miniature types used as if-amplifier tubes in color and black-and-white television receivers. Outlines section, 6C; requires miniature 9-contact socket. Types 3EJ7/XF184 and 4EJ7/LF184 are identical with type 6EJ7/EF184 except for heater ratings.

|                                   | 3EJ7/<br>XF184 | 4EJ7/<br>LF184 | 6EJ7/<br>EF184 |        |
|-----------------------------------|----------------|----------------|----------------|--------|
| Heater Voltage (ac/dc) .....      | 3.4            | 4.4            | 6.3            | volts  |
| Heater Current .....              | 0.6            | 0.45           | 0.3            | ampere |
| Peak Heater-Cathode Voltage ..... | ±150 max       | ±150 max       | ±150 max       | volts  |

|   |           |    |
|---|-----------|----|
| Direct Interelectrode Capacitances:   |           |    |
| Grid No.1 to Plate .....  | 0.005 max | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 10        | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     | 8         | pF |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Center Values)

|  |     |       |
|--|-----|-------|
| Plate Supply Voltage .....                   | 550 | volts |
| Plate Voltage .....                          | 250 | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage ..... | 550 | volts |
| Grid-No.2 Voltage .....                      | 250 | volts |
| Cathode Current .....                        | 25  | mA    |
| Plate Dissipation .....                      | 2.5 | watts |
| Grid-No.2 Input .....                        | 0.9 | watt  |

#### CHARACTERISTICS

|                                  |                                |       |        |
|----------------------------------|--------------------------------|-------|--------|
| Plate Voltage .....              | 190                            | 200   | volts  |
| Grid No.3 .....                  | Connected to cathode at socket |       | volts  |
| Grid-No.2 Voltage .....          | 190                            | 200   | volts  |
| Grid-No.1 Voltage .....          | -2.35                          | -2.5  | volts  |
| Plate Resistance (Approx.) ..... | 0.35                           | 0.35  | megohm |
| Transconductance .....           | 15000                          | 15000 | μmhos  |
| Plate Current .....              | 10                             | 10    | mA     |
| Grid-No.2 Current .....          | 4.1                            | 4.1   | mA     |

#### MAXIMUM CIRCUIT VALUE

|                                    |   |        |
|------------------------------------|---|--------|
| Grid-No.1-Circuit Resistance ..... | 1 | megohm |
|------------------------------------|---|--------|

**6EL4**

Refer to chart at end of section.

**6EL4A**


For replacement use type 6BK4C/6EL4A.

**6EM5**

8EM5

### BEAM POWER TUBE

Miniature type used as vertical-deflection amplifier in television receivers utilizing picture tubes having diagonal deflection angles of 110 degrees. Outlines section, 6G; requires miniature 9-contact socket. Type 8EM5 is identical with type 6EM5 except for heater ratings.



9HN

|  |             |             |         |
|--|-------------|-------------|---------|
|  | <b>6EM5</b> | <b>8EM5</b> |         |
| Heater Voltage (ac/dc) .....                                 | 6.3         | 8.4         | volts   |
| Heater Current .....   | 0.8         | 0.6         | ampere  |
| Heater Warm-up Time (Average) .....                          | —           | 11          | seconds |
| Heater-Cathode Voltage:                                      |             |             |         |
| Peak value .....   | ±200 max    | ±200 max    | volts   |
| Average value .....  | 100 max     | 100 max     | volts   |
| Direct Interelectrode Capacitances:                          |             |             |         |
| Grid No.1 to Plate .....                                     |             | 0.7 max     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |             | 10          | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |             | 5.1         | pF      |

### Class A<sub>1</sub> Amplifier

#### CHARACTERISTICS

|   |      |      |        |
|---|------|------|--------|
| Plate Voltage .....   | 60   | 250  | volts  |
| Grid-No.2 Voltage .....                                       | 250  | 250  | volts  |
| Grid-No.1 Voltage .....                                       | 0    | -18  | volts  |
| Mu Factor, Grid No.1 to Grid No.2 .....                       | —    | 8.7  |        |
| Plate Resistance .....  | —    | 0.05 | megohm |
| Transconductance .....  | —    | 5100 | μmhos  |
| Plate Current .....   | 180* | 40   | mA     |
| Grid-No.2 Current .....                                       | 30*  | 3    | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 0.2 mA ..... | —    | -37  | volts  |

\* These values can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system

MAXIMUM RATINGS (Design-Center Values)



|   |                   |       |
|---|-------------------|-------|
| DC Plate Voltage .....                                      | 315               | volts |
| Peak Positive-Pulse Plate Voltage# (Absolute Maximum) ..... | 2200 <sup>A</sup> | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                       | 285               | volts |
| Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage .....  | 250               | volts |
| Peak Cathode Current .....                                  | 210               | mA    |
| Average Cathode Current .....                               | 60                | mA    |
| Plate Dissipation .....                                     | 10                | watts |
| Grid-No.2 Input .....                                       | 1.5               | watts |
| Bulb Temperature (At hottest point) .....                   | 250               | °C    |

MAXIMUM CIRCUIT VALUE

Grid-No.1-Circuit Resistance ..... 2.2 megohms


# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

<sup>A</sup> Under no circumstances should this absolute value be exceeded.

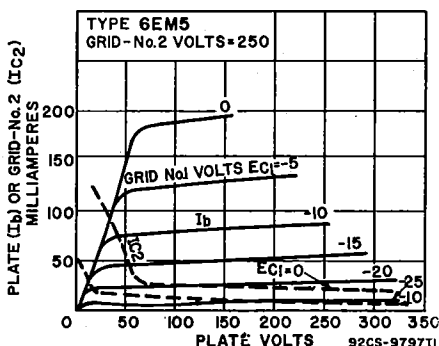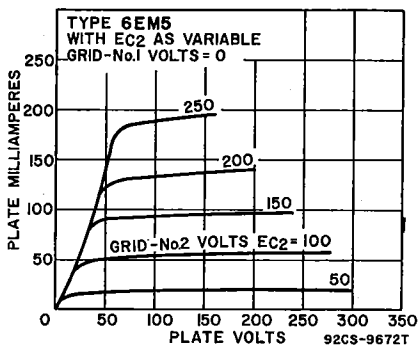

Refer to chart at end of section.

6EM7



8BD

DUAL TRIODE

Glass octal type used as combined vertical-deflection amplifier and vertical-deflection oscillator in color and black-and-white television receivers. Outlines section, 13A; requires octal socket. For curve of average plate characteristics, Unit No.1, refer to type 6DR7 (Unit No.1). Types 10EM7, 13EM7, and 13EM7/15EA7 are identical with type 6EM7/6EA7 except for heater ratings.

6EM7/6EA7

10EM7, 13EM7,  
13EM7/15EA7

|   | 6EM7/6EA7 | 10EM7     | 13EM7/15EA7 |         |
|---|-----------|-----------|-------------|---------|
| Heater Voltage (ac/dc) .....                  | 6.3       | 9.7       | 13          | volts   |
| Heater Current .....                          | 0.925     | 0.6       | 0.45        | ampere  |
| Heater Warm-up Time (Average) .....           | —         | 11        | 11          | seconds |
| Heater-Cathode Voltage:                       |           |           |             |         |
| Peak value .....                              | ±200 max  | ±200 max  | ±200 max    | volts   |
| Average value .....                           | 100 max   | 100 max   | 100 max     | volts   |
| Direct Interelectrode Capacitances (Approx.): |           | Unit No.1 | Unit No.2   |         |
| Grid to Plate .....                           |           | 4.8       | 10          | pF      |
| Grid to Cathode and Heater .....              |           | 2.2       | 7           | pF      |
| Plate to Cathode and Heater .....             |           | 0.6       | 1.8         | pF      |

|   |          |           |           |         |
|---|----------|-----------|-----------|---------|
| Heater Voltage (ac/dc) .....                  | 6.3      | 9.7       | 13        | volts   |
| Heater Current .....                          | 0.925    | 0.6       | 0.45      | ampere  |
| Heater Warm-up Time (Average) .....           | —        | 11        | 11        | seconds |
| Heater-Cathode Voltage:                       |          |           |           |         |
| Peak value .....                              | ±200 max | ±200 max  | ±200 max  | volts   |
| Average value .....                           | 100 max  | 100 max   | 100 max   | volts   |
| Direct Interelectrode Capacitances (Approx.): |          | Unit No.1 | Unit No.2 |         |
| Grid to Plate .....                           |          | 4.8       | 10        | pF      |
| Grid to Cathode and Heater .....              |          | 2.2       | 7         | pF      |
| Plate to Cathode and Heater .....             |          | 0.6       | 1.8       | pF      |

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|  | Unit No.1 | Unit No.2 |       |
|--|-----------|-----------|-------|
| Plate Voltage  | 250       | 150       | volts |
| Grid Voltage   | -3        | -20       | volts |
| Amplification Factor   | 64        | 5.4       |       |
| Plate Resistance (Approx.)   | 40000     | 750       | ohms  |
| Transconductance   | 1600      | 7200      | μmhos |
| Plate Current  | 1.4       | 50        | mA    |
| Plate Current, for plate voltage of 60 volts and zero grid voltage | —         | 95        | mA    |
| Plate Current, for grid voltage of -28 volts                       | —         | 10        | mA    |
| Grid Voltage (Approx.):  |           |           |       |
| For plate current of 10 μA   | -5.5      | —         | volts |
| For plate current of 100 μA  | —         | -45       | volts |

## Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system


## MAXIMUM RATINGS (Design-Maximum Values)

|                                    | Unit No.1<br>Oscillator | Unit No.2<br>Amplifier |       |
|------------------------------------|-------------------------|------------------------|-------|
| DC Plate Voltage                   | 330                     | 330                    | volts |
| Peak Positive-Pulse Plate Voltage# | —                       | 1500                   | volts |
| Peak Negative-Pulse Grid Voltage   | 400                     | 250                    | volts |
| Peak Cathode Current               | 77                      | 175                    | mA    |
| Average Cathode Current            | 22                      | 50                     | mA    |
| Plate Dissipation                  | 1.5                     | 10                     | watts |

## MAXIMUM CIRCUIT VALUES

| Grid-Circuit Resistance:         | Unit No.1 | Unit No.2 |         |
|----------------------------------|-----------|-----------|---------|
| For grid-resistor-bias operation | 2.2       | 2.2       | megohms |
| For cathode-bias operation       | 2.2       | 2.2       | megohms |


# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

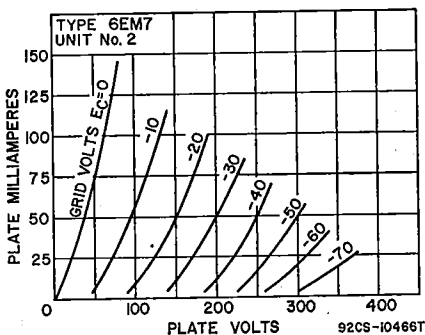

## 6EN4

SHARP-CUTOFF  
BEAM TRIODE

Glass octal type used as a shunt voltage-regulator tube in the high-voltage power supply of color television receivers. Outlines section, 21B; requires octal socket. Socket terminals 3, 4, and 8 should not be used as tie points. For high voltage and X-ray safety considerations, refer to page 93.



|  |           |        |
|--|-----------|--------|
| Heater Voltage (ac/dc)                         | 6.3       | volts  |
| Heater Current                                 | 0.2       | ampere |
| Peak Heater-Cathode Voltage                    | -450* max | volts  |
| Direct Interelectrode Capacitances (Approx.):‡ |           |        |
| Grid to Plate                                  | 1         | pF     |
| Plate to Cathode and Heater                    | 2.6       | pF     |
| Grid to Cathode and Heater                     | 1         | pF     |



\* Series impedance should be used with the cathode to limit the cathode current under prolonged short-circuit conditions to 450 mA.

‡ Without external shield.

### Shunt Voltage-Regulator Service

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                |       |       |
|--------------------------------|-------|-------|
| DC Plate Voltage               | 30000 | volts |
| Unregulated DC Supply Voltage  | 60000 | volts |
| DC Grid Voltage                | -135  | volts |
| Peak Grid Voltage <sup>‡</sup> | -440  | mA    |
| Average Plate Current          | 1.6   | mA    |
| Plate Dissipation              | 40    | watts |

#### TYPICAL OPERATION

|  |       |         |
|--|-------|---------|
| Unregulated DC Supply Voltage                        | 36000 | volts   |
| Equivalent Resistance of Unregulated Supply          | 11    | megohms |
| Voltage Divider Values:                              |       |         |
| R <sub>1</sub> (5 watts)                             | 220   | megohms |
| R <sub>2</sub> (2 watts)                             | 1     | megohm  |
| R <sub>3</sub> (0.5 watt)                            | 0.82  | megohm  |
| DC Reference Voltage Supply                          | 200   | volts   |
| Equivalent Resistance of Reference Voltage           | 1000  | ohms    |
| Effective Grid-Plate Transconductance                | 200   | μmhos   |
| DC Plate Current for Load Current of 0 mA            | 1000  | μA      |
| DC Plate Current for Load Current of 1 mA            | 45    | μA      |
| Regulated DC Output Voltage for Load Current of 0 mA | 25000 | volts   |
| Regulated DC Output Voltage for Load Current of 1 mA | 24500 | volts   |
| Amplification Factor                                 | 2000  |         |

#### MAXIMUM CIRCUIT VALUE

|                         |   |         |
|-------------------------|---|---------|
| Grid-Circuit Resistance | 3 | megohms |
|-------------------------|---|---------|

‡ For interval of 20 seconds maximum during equipment warm-up period.

#### CHARACTERISTICS RANGE VALUES

|                     | Note | Min | Max |       |
|---------------------|------|-----|-----|-------|
| Grid Voltage (1)    | 1    | -7  | —   | volts |
| Grid Voltage (2)    | 2    | —   | -40 | volts |
| Grid-Voltage Change | 3    | —   | 9   | volts |

Note 1: With dc plate voltage of 30000 volts and dc plate current of 1 mA.

Note 2: With dc plate voltage of 30000 volts and dc plate current of 0.1 mA.


Note 3: Difference between grid voltage (1) and grid voltage (2).

#### X-RADIATION CHARACTERISTIC

X-Radiation, Maximum:

Statistical value controlled on a lot sampling basis . . . . . 0.5 mR/hr

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

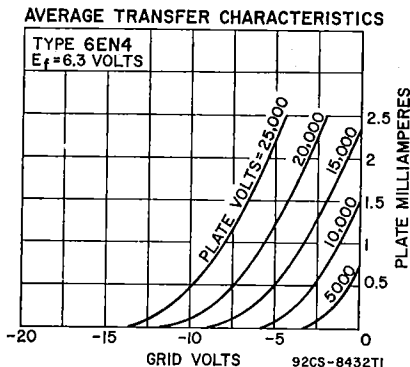


Refer to chart at end of section.

**6ER5**

3ER5

**HIGH-MU TRIODE**

Miniature type with frame grid used in vhf tuners of color and black-and-white television receivers. Outlines section 5C; requires miniature 7-contact socket. Type 3ER5 is identical to type 6ER5 except for heater ratings.

**7FP**

|   | 3ER5       | 6ER5                  |        |
|---|------------|-----------------------|--------|
| Heater Voltage (ac/dc)                        | 2.8        | 6.3                   | volts  |
| Heater Current                                | 0.45       | 0.18                  | ampere |
| Peak Heater-Cathode Voltage                   | ±100 max   | ±100 max              | volts  |
| Direct Interelectrode Capacitances:           | Unshielded | Shielded <sup>o</sup> |        |
| Grid to Plate                                 | 0.38       | 0.36                  | pF     |
| Grid to Cathode, Heater, and Internal Shield  | 4.4        | 4.4                   | pF     |
| Plate to Cathode, Heater, and Internal Shield | 3          | 4                     | pF     |
| Grid to Heater                                | 0.28 max   | 0.28 max              | pF     |
| Plate to Cathode                              | 0.24       | 0.24                  | pF     |
| Cathode to Grid                               | 3.1        | 3.1 <sup>Δ</sup>      | pF     |
| Heater to Cathode                             | 2.5        | 2.5 <sup>Δ</sup>      | pF     |

<sup>o</sup> With external shield connected to cathode except as noted.

<sup>Δ</sup> With external shield connected to ground.

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Center Values)**

|                                   |     |       |
|-----------------------------------|-----|-------|
| Plate Voltage                     | 250 | volts |
| Grid Voltage, Negative-bias value | 50  | volts |
| Cathode Current                   | 20  | mA    |
| Plate Dissipation                 | 2.2 | watts |

**CHARACTERISTICS**

|  |       |       |
|--|-------|-------|
| Plate Voltage  | 200   | volts |
| Grid Voltage   | -1.2  | volts |
| Amplification Factor                                     | 80    |       |
| Plate Resistance (Approx.)                               | 8000  | ohms  |
| Transconductance   | 10500 | μmhos |
| Plate Current  | 10    | mA    |
| Grid Voltage (Approx.) for transconductance of 500 μmhos | -3.8  | volts |
| Grid Voltage (Approx.) for transconductance of 100 μmhos | -5.6  | volts |

**MAXIMUM CIRCUIT VALUE**

|                         |   |        |
|-------------------------|---|--------|
| Grid-Circuit Resistance | 1 | megohm |
|-------------------------|---|--------|

**6E55**


Refer to chart at end of section.

**6E58**

Refer to chart at end of section.

**6E58/  
ECC189****VARIABLE-MU TWIN TRIODE**

Miniature type used as cascode-type amplifier in tuners of television receivers. Outlines section, 6B; requires miniature 9-contact socket.

**9AJ**

|   | Unshielded | Shielded*      |        |
|---|------------|----------------|--------|
| Heater Voltage (ac/dc)                    | 6.3        | 6.3            | volts  |
| Heater Current                            | 0.365      | 0.365          | ampere |
| Direct Interelectrode Capacitances:       |            |                |        |
| Grid to Plate (Each Unit)                 | 1.9        | 1.9            | pF     |
| Plate to Cathode (Each Unit)              | 0.18       | 0.17           | pF     |
| Heater to Cathode (Each Unit)             | 3          | 3 <sup>Δ</sup> | pF     |
| Plate of Unit No.2 to Plate of Unit No.1  | 0.04 max   | 0.015 max      | pF     |
| Plate of Unit No.2 to Grid of Unit No.1   | 0.003 max  | 0.003 max      | pF     |
| Grid of Unit No.1 to Cathode of Unit No.2 | 0.002 max  | 0.002 max      | pF     |

\* With external shield connected to cathode of unit under test except as noted.

<sup>Δ</sup> With external shield connected to ground.

Class A<sub>1</sub> Amplifier (Each Unit)

CHARACTERISTICS

|                            |       |     |     |            |
|----------------------------|-------|-----|-----|------------|
| Plate Voltage              | 90    | 90  | 90  | volts      |
| Grid Voltage               | -1.2  | -5  | -9  | volts      |
| Plate Resistance (Approx.) | 2500  | —   | —   | ohms       |
| Transconductance           | 12500 | 625 | 125 | $\mu$ mhos |
| Plate Current              | 15    | —   | —   | mA         |

Cascode-Type Amplifier

MAXIMUM RATINGS (Design-Maximum Values)

|   |     |       |
|---|-----|-------|
| Plate Supply Voltage with plate current of 0 mA | 550 | volts |
| Plate Voltage (Each unit)                       | 130 | volts |
| Grid Voltage, Negative-bias value (Each unit)   | 50  | volts |
| Cathode Current (Each unit)                     | 22  | mA    |
| Plate Dissipation (Each unit)                   | 1.8 | watts |
| Heater-Cathode Voltage:                         |     |       |
| Unit No.1: <sup>o</sup>                         |     |       |
| RMS voltage between cathode and heater          | 50  | volts |
| Unit No.2: <sup>o</sup>                         |     |       |
| RMS voltage between cathode and heater*         | 50  | volts |
| DC voltage between cathode and heater*          | 130 | volts |

TYPICAL OPERATION in a cascode-type circuit

|  |       |            |
|--|-------|------------|
| Supply Voltage   | 180   | volts      |
| Plate Current  | 15    | mA         |
| Transconductance   | 12500 | $\mu$ mhos |
| Noise Figure*  | 6.5   | dB         |
| Grid Voltage (Approx.) for transconductance of 125 $\mu$ mhos                            | -9    | volts      |
| Input Voltage for cross-modulation factor of 0.01 and transconductance of 125 $\mu$ mhos | 500   | mV         |

MAXIMUM CIRCUIT VALUE

|                                     |   |        |
|-------------------------------------|---|--------|
| Grid-Circuit Resistance (Each unit) | 1 | megohm |
|-------------------------------------|---|--------|


- ° Grounded-cathode input unit—pins 6, 7, and 8.
- Grounded-grid output unit—pins 1, 2, and 3.
- Cathode positive with respect to heater.
- With grid of output unit connected to a voltage divider.
- \* Measured with tube operating in a television tuner.

Refer to chart at end of section.

6E7

HIGH-MU TWIN TRIODE

6EU7



9LS

Miniature type used in high-gain, resistance-coupled, low-level audio-amplifier applications where low-hum and non-microphonic characteristics are important, such as microphone amplifiers and pre-amplifiers for phonographs. Outlines section, 6B; requires miniature 9-contact socket. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section.

|   |                    |        |
|---|--------------------|--------|
| Heater Voltage (ac/dc)  | 6.3                | volts  |
| Heater Current  | 0.3                | ampere |
| Heater-Cathode Voltage:   |                    |        |
| Peak value  | ±200 max           | volts  |
| Average value   | 100 max            | volts  |
| Direct Interelectrode Capacitances (Each Unit, Approx.):          |                    |        |
| Grid to Plate   | 1.5                | pF     |
| Grid to Cathode and Heater  | 1.6                | pF     |
| Plate to Cathode and Heater                                       | 0.2                | pF     |
| Equivalent Noise and Hum Voltage (Referenced to Grid, Each Unit): |                    |        |
| Average Value*  | 1.8 microvolts rms |        |

\* Measured in "true rms" units under the following conditions: Heater volts (ac), 6.3; center-tap of heater transformer grounded; plate supply volts, 250; plate load resistor, 10000 ohms; cathode resistor, 2700 ohms; cathode bypass capacitor, 100  $\mu$ F; grid resistor, 0 ohms; amplifier frequency range, 25 to 10000 Hz.


Class A<sub>1</sub> Amplifier (Each Unit)

## MAXIMUM RATINGS (Design-Maximum Values)

|                           |     |       |
|---------------------------|-----|-------|
| Plate Voltage .....       | 330 | volts |
| Grid Voltage:             |     |       |
| Negative-bias value ..... | 55  | volts |
| Positive-bias value ..... | 0   | watts |
| Plate Dissipation .....   | 1.2 | watts |

## CHARACTERISTICS

|                                  |       |       |       |
|----------------------------------|-------|-------|-------|
| Plate Voltage .....              | 100   | 250   | volts |
| Grid Voltage .....               | -1    | -2    | volts |
| Amplification Factor .....       | 100   | 100   |       |
| Plate Resistance (Approx.) ..... | 80000 | 62500 | ohms  |
| Transconductance .....           | 1250  | 1600  | μmhos |
| Plate Current .....              | 0.5   | 1.2   | mA    |

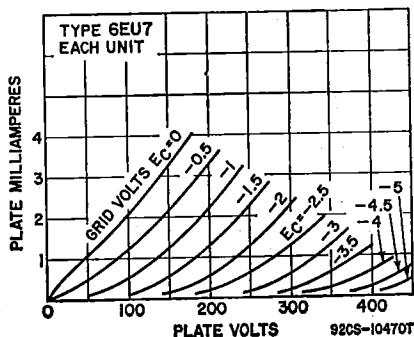

6EU8

Refer to chart at end of section.


6EV5

## SHARP-CUTOFF TETRODE

Miniature type used as rf amplifier in vhf tuners of television receivers. Outlines section, 5C; requires miniature 7-contact socket.

|   |           |        |
|---|-----------|--------|
| Heater Voltage (ac/dc) .....                                    | 6.3       | volts  |
| Heater Current .....  | 0.2       | ampere |
| Heater-Cathode Voltage:   |           |        |
| Peak value .....  | ±100 max  | volts  |
| Average value .....   | 50 max    | volts  |
| Direct Interelectrode Capacitances <sup>Δ</sup> :               |           |        |
| Grid No.1 to Plate .....  | 0.035 max | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Internal Shield .. | 4.5       | pF     |
| Plate to Cathode, Heater, Grid No.2, and Internal Shield ..     | 2.9       | pF     |

<sup>Δ</sup> With external shield connected to cathode.



7EW

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 275                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 180                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Cathode Current .....                                       | 20                 | mA    |
| Plate Dissipation .....                                     | 3.25               | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 90 volts .....                 | 0.2                | watt  |
| For grid-No.2 voltages between 90 and 180 volts .....       | See curve page 300 |       |

**CHARACTERISTICS**

|   |      |            |
|---|------|------------|
| Plate Voltage .....   | 250  | volts      |
| Grid-No.2 Voltage .....   | 80   | volts      |
| Grid-No.1 Voltage .....   | -1   | volt       |
| Plate Resistance (Approx.) .....                                      | 0.15 | megohm     |
| Transconductance .....  | 8800 | $\mu$ mhos |
| Plate Current .....   | 11.5 | mA         |
| Grid-No.2 Current .....   | 0.9  | mA         |
| Grid-No.1 Voltage (Approx.) for transconductance of 100 $\mu$ mhos .. | -4.5 | volts      |

**MAXIMUM CIRCUIT VALUE**


|                                    |     |        |
|------------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance ..... | 0.5 | megohm |
|------------------------------------|-----|--------|

Refer to chart at end of section.

**6EV7**

**6EW6**

5EW6



**SHARP-CUTOFF PENTODE**

Miniature type used in the gain-controlled picture-ift stages of vhf color and black-and-white television receivers operating at an intermediate frequency in the order of 40 MHz. Outlines section, 5C; requires miniature 7-contact socket. Type 5EW6 is identical with type 6EW6 except for heater ratings.


|   | 5EW6                | 6EW6               |         |
|---|---------------------|--------------------|---------|
| Heater Voltage (ac/dc) .....  | 5.6                 | 6.3                | volts   |
| Heater Current .....  | 0.45                | 0.4                | ampere  |
| Heater Warm-up Time (Average) .....   | 11                  | —                  | seconds |
| <b>Heater-Cathode Voltage:</b>  |                     |                    |         |
| Peak value .....  | $\pm 200$ max       | $\pm 200$ max      | volts   |
| Average value .....   | 100 max             | 100 max            | volts   |
| <b>Direct Interelectrode Capacitances:</b>                                    |                     |                    |         |
| Grid No.1 to Plate .....  | Unshielded 0.04 max | Shielded* 0.03 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 10                  | 10                 | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     | 2.4                 | 3.4                | pF      |

\* With external shield connected to cathode.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid No.3 (Suppressor-Grid) Voltage, Positive value .....   | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 3.1                | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 0.65               | watt  |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

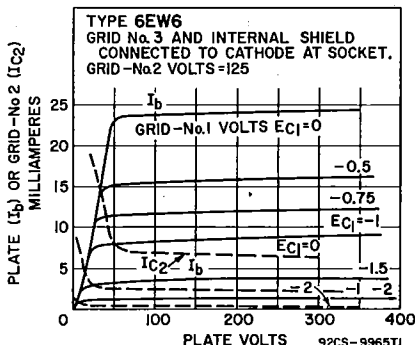

## CHARACTERISTICS


|   |           |                      |
|---|-----------|----------------------|
| Plate Supply Voltage .....  | 125       | volts                |
| Grid No.3 .....   | Connected | to cathode at socket |
| Grid-No.2 Supply Voltage .....                                    | 125       | volts                |
| Cathode-Bias Resistor .....                                       | 56        | ohms                 |
| Plate Resistance (Approx.) .....                                  | 0.2       | megohm               |
| Transconductance .....  | 14000     | $\mu$ mhos           |
| Plate Current .....   | 11        | mA                   |
| Grid-No.2 Current .....   | 3.2       | mA                   |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A ..... | -3.5      | volts                |

**6EW7**

10EW7, 15EW7

## DUAL TRIODE

Miniature type used as combined vertical-deflection oscillator and vertical-deflector amplifier in television receivers. Outlines section, 6E, requires miniature 9-contact socket. For curve of average plate characteristics, Unit No.1, refer to type 6DE7 (Unit No.1). Types 10EW7 and 15EW7 are identical with type 6EW7 except for heater ratings.




|   |               |               |               |         |
|---|---------------|---------------|---------------|---------|
| Heater Voltage (ac/dc) .....                  | 6EW7          | 10EW7         | 15EW7         | volts   |
| Heater Current .....                          | 6.3           | 9.7           | 14.8          | ampere  |
| Heater Warm-up Time .....                     | —             | 11            | 11            | seconds |
| Heater-Cathode Voltage:                       |               |               |               |         |
| Peak value .....                              | $\pm 200$ max | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....                           | 100 max       | 100 max       | 100 max       | volts   |
| Direct Interelectrode Capacitances (Approx.): | Unit No.1     | Unit No.2     |               |         |
| Grid to Plate .....                           | 4.2           | 9             | pF            |         |
| Grid to Cathode and Heater .....              | 2.2           | 7             | pF            |         |
| Plate to Cathode and Heater .....             | 0.4           | 1.2           | pF            |         |

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|   |           |           |            |
|---|-----------|-----------|------------|
|   | Unit No.1 | Unit No.2 |            |
| Plate Voltage .....   | 250       | 150       | volts      |
| Grid Voltage .....  | -11       | -17.5     | volts      |
| Amplification Factor .....  | 17.5      | 6         |            |
| Plate Resistance (Approx.) .....  | 8750      | 800       | ohms       |
| Transconductance .....  | 2000      | 7500      | $\mu$ mhos |
| Plate Current .....   | 5.5       | 45        | mA         |
| Plate Current for plate voltage of 60 volts and zero grid voltage ..... | —         | 95        | mA         |
| Plate Current for grid voltage of -25 volts .....                       | —         | 8         | mA         |
| Grid Voltage (Approx.) for plate current of 10 $\mu$ A .....            | -20       | —         | volts      |
| Grid Voltage (Approx.) for plate current of 100 $\mu$ A .....           | —         | -40       | volts      |

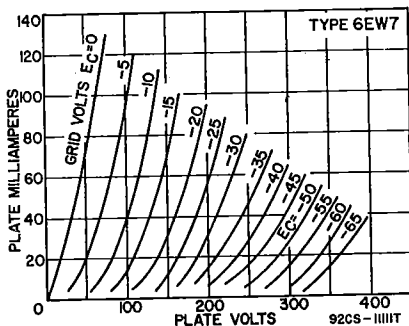

**Vertical-Deflection Oscillator and Amplifier**

For operation in a 525-line, 30-frame system


| MAXIMUM RATINGS (Design-Maximum Values) | Unit No.1<br>Oscillator | Unit No.2<br>Amplifier |       |
|---|-------------------------|------------------------|-------|
| DC Plate Voltage                        | 330                     | 330                    | volts |
| Peak Positive-Pulse Plate Voltage#      | —                       | 1500                   | volts |
| Peak Negative-Pulse Grid Voltage        | 400                     | 250                    | volts |
| Peak Cathode Current                    | 77                      | 175                    | mA    |
| Average Cathode Current                 | 22                      | 50                     | mA    |
| Plate Dissipation                       | 1.5                     | 10                     | watts |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |     |         |
|----------------------------------|-----|-----|---------|
| Grid-Circuit Resistance:         |     |     |         |
| For cathode-bias operation       | 2.2 | 2.2 | megohms |
| For grid-resistor-bias operation | 2.2 | 2.2 | megohms |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

|                                   |              |
|-----------------------------------|--------------|
| Refer to chart at end of section. | <b>6EX6</b>  |
| Refer to chart at end of section. | <b>6EY6</b>  |
| Refer to chart at end of section. | <b>6EZ5</b>  |
| Refer to chart at end of section. | <b>6EZ8</b>  |
| Refer to chart at end of section. | <b>6F4</b>   |
| Refer to chart at end of section. | <b>6F5</b>   |
| Refer to chart at end of section. | <b>6F5GT</b> |
|                                   | <b>6F6</b>   |
| Refer to chart at end of section. | <b>6F6G</b>  |
|                                   | <b>6F6GT</b> |
| Refer to chart at end of section. | <b>6F7</b>   |
| Refer to chart at end of section. | <b>6F8G</b>  |
| Refer to chart at end of section. | <b>6FA7</b>  |



**9HF**

**DUAL TRIODE**

Miniature type containing high-mu and low-mu triode units used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers. Outlines section, 6E; requires miniature 9-contact socket. Type 13FD7 is identical with type 6FD7 except for heater ratings.

**6FD7**

13FD7

|   | 6FD7      | 13FD7     |         |
|---|-----------|-----------|---------|
| Heater Voltage (ac/dc)                        | 6.3       | 13        | volts   |
| Heater Current                                | 0.925     | 0.45      | ampere  |
| Heater Warm-up Time (Average)                 | —         | 11        | seconds |
| Heater-Cathode Voltage:                       |           |           |         |
| Peak value                                    | ±200 max  | ±200 max  | volts   |
| Average value                                 | 100 max   | 100 max   | volts   |
| Direct Interelectrode Capacitances (Approx.): | Unit No.1 | Unit No.2 |         |
| Grid to Plate                                 | 4.5       | 10        | pF      |
| Grid to Cathode and Heater                    | 2.2       | 6.5       | pF      |
| Plate to Cathode and Heater                   | 0.4       | 0.2       | pF      |

Class A<sub>1</sub> Amplifier

| CHARACTERISTICS                                    | Unit No.1 | Unit No.2 |                 |
|--|-----------|-----------|-----------------|
| Plate Voltage .....                                | 250       | 60        | 150 volts       |
| Grid Voltage .....                                 | -3        | 0         | -17.5 volts     |
| Amplification Factor .....                         | 64        | —         | 6               |
| Plate Resistance (Approx.) .....                   | 40000     | —         | 800 ohms        |
| Transconductance .....                             | 1600      | —         | 7500 $\mu$ mhos |
| Plate Current .....                                | 1.5       | 95*       | 40 mA           |
| Grid Voltage (Approx.):                            |           |           |                 |
| For plate current of 10 $\mu$ A .....              | -5.5      | —         | — volts         |
| For plate current of 100 $\mu$ A .....             | —         | —         | -40 volts       |
| Transconductance, For plate current of 1 mA .....  | —         | —         | 500 $\mu$ mhos  |
| Plate Current, For grid voltage of -25 volts ..... | —         | —         | 6 mA            |

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

## Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Maximum Values)  | Unit No.1<br>Oscillator | Unit No.2<br>Amplifier |       |
|--|-------------------------|------------------------|-------|
| DC Plate Voltage .....                   | 330                     | 330                    | volts |
| Peak Positive-Pulse Plate Voltage# ..... | —                       | 1500                   | volts |
| Peak Negative-Pulse Grid Voltage .....   | 400                     | 250                    | volts |
| Peak Cathode Current .....               | 70                      | 175                    | mA    |
| Average Cathode Current .....            | 20                      | 50                     | mA    |
| Plate Dissipation .....                  | 1.5                     | 10                     | watts |

## MAXIMUM CIRCUIT VALUES

|  |     |     |         |
|--|-----|-----|---------|
| Grid-Circuit Resistance:                               |     |     |         |
| For grid-resistor-bias or cathode-bias operation ..... | 2.2 | 2.2 | megohms |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

## 6FE5

Refer to chart at end of section.

## 6FG6/EM84


Refer to chart at end of section.

## 6FG7

5FG7

MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer tube in vhf color and black-and-white television receivers. Outlines section, 6B; requires miniature 9-contact socket. Type 5FG7 is identical with type 6FG7 except for heater ratings.



9GF

|  | 5FG7          | 6FG7          |         |
|--|---------------|---------------|---------|
| Heater Voltage (ac/dc) .....                                 | 4.7           | 6.3           | volts   |
| Heater Current .....   | 0.6           | 0.45          | ampere  |
| Heater Warm-up Time (Average) .....                          | 11            | 11            | seconds |
| Heater-Cathode Voltage:                                      |               |               |         |
| Peak value .....   | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....  | 100 max       | 100 max       | volts   |
| Direct Interelectrode Capacitances:                          |               |               |         |
| Triode Unit:   |               |               |         |
| Grid to Plate .....  | 1.8           | 1.8           | pF      |
| Grid to Cathode, Pentode Grid No.3, and Heater .....         | 3             | 3             | pF      |
| Plate to Cathode, Pentode Grid No.3, and Heater .....        | 1.3           | 1.9           | pF      |
| Pentode Unit:  |               |               |         |
| Grid No.1 to Plate .....                                     | 0.02 max      | 0.01 max      | pF      |
| Grid No.1 to Cathode, Grid No.3, Grid No.2, and Heater ..... | 5             | 5             | pF      |
| Plate to Cathode, Grid No.3, Grid No.2, and Heater .....     | 2.4           | 3.4           | pF      |
| Heater to Cathode, and Pentode Grid No.3 .....               | 6             | 6*            | pF      |

\* With external shield connected to cathode except as noted.

\* With external shield connected to ground.




**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   | Triode Unit | Pentode Unit |          |
|---|-------------|--------------|----------|
| Plate Voltage   | 330         | 330          | volts    |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —           | 330          | volts    |
| Grid-No.2 Voltage                                     | —           | See curve    | page 300 |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0            | volts    |
| Plate Dissipation                                     | 2.5         | 3            | watts    |
| Grid-No.2 Input:                                      |             |              |          |
| For grid-No.2 voltages up to 165 volts                | —           | See curve    | page 300 |
| For grid-No.2 voltages between 165 and 330 volts      | —           | 0.55         | watt     |

**CHARACTERISTICS**

|  | Triode Unit | Pentode Unit |       |
|--|-------------|--------------|-------|
| Plate Voltage  | 125         | 100 125      | volts |
| Grid-No.2 Voltage                                      | —           | 100 125      | volts |
| Grid-No.1 Voltage                                      | -1          | 0 -1         | volts |
| Amplification Factor                                   | 43          | —            | —     |
| Plate Resistance (Approx.)                             | 5700        | — 180000     | ohms  |
| Transconductance                                       | 7500        | 7400 6000    | μmhos |
| Plate Current  | 13          | — 11         | mA    |
| Grid-No.2 Current                                      | —           | — 4          | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 30 μA | -6.5        | — -7.5       | volts |



**7FP**

**HIGH-MU TRIODE**

**6FH5**

2FH5

Miniature type used as an rf amplifier in vhf tuners of color and black-and-white television receivers. Outlines section, 5C; requires 7-contact socket. Type 2FH5 is identical to type 6FH5 except for heater ratings.


|   | 2FH5       | 6FH5     |         |
|---|------------|----------|---------|
| Heater Voltage (ac/dc)                        | 2.85       | 6.3      | volts   |
| Heater Current                                | 0.6        | 0.2      | ampere  |
| Heater Warm-up Time (Average)                 | 11         | —        | seconds |
| Peak Heater-Cathode Voltage                   | ±100 max   | ±100 max | volts   |
| Direct Interelectrode Capacitances (Approx.): | Unshielded | Shielded |         |
| Grid to Plate                                 | 0.52       | 0.52     | pF      |
| Grid to Cathode, Heater, and Internal Shield  | 3.2        | 3.2      | pF      |
| Plate to Cathode, Heater, and Internal Shield | 3.2        | 4        | pF      |

• With external shield connected to Pin 1.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |     |       |
|-----------------------------------|-----|-------|
| Plate Voltage                     | 150 | volts |
| Grid Voltage, Positive-bias value | 0   | volts |
| Cathode Current                   | 22  | mA    |
| Plate Dissipation                 | 2.2 | watts |

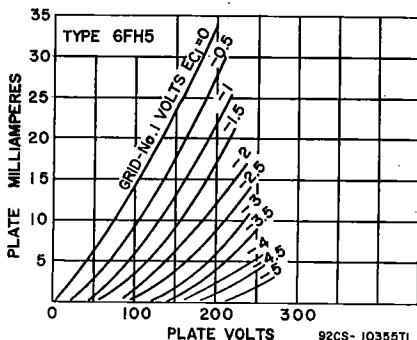

92CS-10355T1

**CHARACTERISTICS**


|   |      |            |
|---|------|------------|
| Plate Voltage .....   | 135  | volts      |
| Grid Voltage .....  | -1   | volts      |
| Plate Resistance (Approx.) .....                              | 5600 | ohms       |
| Transconductance .....  | 9000 | $\mu$ mhos |
| Amplification Factor .....                                    | 50   |            |
| Plate Current .....   | 11   | mA         |
| Grid Voltage (Approx.) for plate current of 100 $\mu$ A ..... | -5.5 | volts      |

**MAXIMUM CIRCUIT VALUE**

|   |   |        |
|---|---|--------|
| Grid-Circuit Resistance, for cathode-bias operation ..... | 1 | megohm |
|---|---|--------|

**6FH8****MEDIUM-MU TRIODE—  
THREE-PLATE TETRODE**

Miniature type used in complex-wave generator applications and in television receiver applications. Sharp-cutoff tetrode unit has pair of additional plates. Outlines section, 6B; requires 9-contact socket.

**9KP**

|  |           |        |
|--|-----------|--------|
| Heater Voltage (ac/dc) .....   | 6.3       | volts  |
| Heater Current .....   | 0.45      | ampere |
| Direct Interelectrode Capacitances: <sup>o</sup>                             |           |        |
| Triode Unit:   |           |        |
| Grid to Plate .....  | 1.4       | pF     |
| Grid to Cathode and Heater .....   | 2.6       | pF     |
| Plate to Cathode and Heater .....  | 1         | pF     |
| Tetrode Unit:  |           |        |
| Grid No.1 to Plate No.2 .....  | 0.06 max  | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Plate No.1A, and Plate No.1B .....  | 4.5       | pF     |
| Plate No.2 to Cathode, Heater, Grid No.2, Plate No.1A, and Plate No.1B ..... | 1.4       |        |
| Tetrode Grid No.1 to Triode Plate .....                                      | 0.35 max  | pF     |
| Tetrode Plate No.2 to Triode Plate .....                                     | 0.008 max | pF     |

<sup>o</sup> With external shield connected to cathode.

**Class A<sub>1</sub> Amplifier****Triode Unit****CHARACTERISTICS**

|   |      |            |
|---|------|------------|
| Plate Voltage .....   | 100  | volts      |
| Grid Voltage .....  | -1   | volts      |
| Amplification Factor .....                                    | 40   |            |
| Plate Resistance (Approx.) .....                              | 7400 | ohms       |
| Transconductance .....  | 5400 | $\mu$ mhos |
| Plate Current .....   | 7.9  | mA         |
| Grid Voltage (Approx.) for plate current of 100 $\mu$ A ..... | -7   | volts      |

Tetrode Unit with Plates No.1A and No.1B Connected to Cathode at Socket

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |            |
|---|------|------------|
| Plate-No.2 Voltage .....  | 250  | volts      |
| Grid-No.2 Voltage .....   | 250  | volts      |
| Grid-No.1 Voltage .....   | -2   | volts      |
| Plate-No.2 Resistance (Approx.) .....                                   | 0.75 | megohm     |
| Transconductance, Grid No.1 to Plate No.2 .....                         | 4400 | $\mu$ mhos |
| Plate-No.2 Current .....  | 7.3  | mA         |
| Grid-No.2 Current .....   | 1.4  | mA         |
| Grid-No.1 Voltage (Approx.) for plate-No.2 current of 100 $\mu$ A ..... | -7   | volts      |

**Complex-Wave Generator****MAXIMUM RATINGS (Design-Maximum Values)**

|  | Triode Unit | Tetrode Unit       |       |
|--|-------------|--------------------|-------|
| Plate Voltage .....                          | 275         | —                  | volts |
| Plate-No.1A Voltage .....                    | —           | 200                | volts |
| Plate-No.1B Voltage .....                    | —           | 200                | volts |
| Plate-No.2 Voltage .....                     | —           | 275                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage ..... | —           | 275                | volts |
| Grid-No.2 Voltage .....                      | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:            |             |                    |       |
| Negative-bias value .....                    | -40         | -40                | volts |
| Positive-bias value .....                    | 0           | 0                  | volts |
| Plate Dissipation .....                      | 1.7         | —                  | watts |
| Plate-No.1A Dissipation .....                | —           | 0.3                | watt  |
| Plate-No.1B Dissipation .....                | —           | 0.3                | watt  |
| Plate-No.2 Dissipation .....                 | —           | 2.3                | watts |

Grid-No.2 Input:

|  |   |                    |      |
|--|---|--------------------|------|
| For grid-No.2 voltages up to 137.5 volts           | — | 0.45               | watt |
| For grid-No.2 voltages between 137.5 and 275 volts | — | See curve page 300 |      |

TYPICAL OPERATION WITH SEPARATE PLATE OPERATION

|                                       | Tetrode Unit |  |       |
|---------------------------------------|--------------|--|-------|
| Plates-No.1A, No.1B, and No.2 Voltage | 100          |  | volts |
| Grid-No.2 Voltage                     | 50           |  | volts |
| Grid-No.1 Voltage                     | —1           |  | volts |
| Plate-No.1A Current                   | 0.04         |  | mA    |
| Plate-No.1B Current                   | 0.04         |  | mA    |
| Plate-No.2 Current                    | 1.6          |  | mA    |
| Grid-No.2 Current                     | 0.3          |  | mA    |
| Transconductance (Approx.):           |              |  |       |
| Grid No.1 to Plate No.1A              | 70           |  | μmhos |
| Grid No.1 to Plate No.1B              | 70           |  | μmhos |
| Grid No.1 to Plate No.2               | 2500         |  | μmhos |

MAXIMUM CIRCUIT VALUES

|  | Triode Unit | Tetrode Unit |        |
|--|-------------|--------------|--------|
| Grid-No.1-Circuit Resistance, for fixed-bias operation | 0.5         | 0.5          | megohm |


Refer to chart at end of section.

6FJ7

6FM7

DUAL TRIODE

13FM7, 13FM7/15FM7



12EJ

Duodecar type used as combined vertical-deflection oscillator and vertical-deflection amplifier in color and black-and-white television receivers. Triode unit No.1 is used as an oscillator, and triode unit No.2 is used as an amplifier. Outlines section, 8C; requires duodecar 12-contact socket. Types 13FM7 and 13FM7/15FM7 are identical with type 6FM7 except for heater ratings.

|                               | 6FM7     | 13FM7<br>13FM7/15FM7 |         |
|-------------------------------|----------|----------------------|---------|
| Heater Voltage (ac/dc)        | 6.3      | 13                   | volts   |
| Heater Current                | 1.05     | 0.45                 | amperes |
| Heater Warm-up Time (Average) | —        | 11                   | seconds |
| Heater-Cathode Voltage:       |          |                      |         |
| Average value                 | ±200 max | ±200 max             | volts   |
| Peak value                    | 100 max  | 100 max              | volts   |

Class A<sub>1</sub> Amplifier

|  | Unit No.1 | Unit No.2 |       |
|--|-----------|-----------|-------|
| Plate Voltage                                      | 250       | 175       | volts |
| Grid Voltage                                       | —3        | —25       | volts |
| Amplification Factor                               | 66        | 5.5       |       |
| Plate Resistance (Approx.)                         | 30000     | 920       | ohms  |
| Transconductance                                   | 2200      | 6000      | μmhos |
| Plate Current                                      | 2         | 40        | mA    |
| Grid Voltage (Approx.) for plate current of 20 μA  | —5.3      | —         | volts |
| Grid Voltage (Approx.) for plate current of 200 μA | —         | —45       | volts |

Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system

|   | Unit No.1<br>Oscillator | Unit No.2<br>Amplifier |       |
|---|-------------------------|------------------------|-------|
| MAXIMUM RATINGS (Design-Maximum Values) |                         |                        |       |
| DC Plate Voltage                        | 350                     | 500                    | volts |
| Peak Positive-Pulse Plate Voltage#      | —                       | 1500                   | volts |
| Peak Negative-Pulse Plate Voltage       | 400                     | 250                    | volts |
| Peak Cathode Current                    | —                       | 175                    | mA    |
| Average Cathode Current                 | —                       | 60                     | mA    |
| Plate Dissipation†                      | 1                       | 10                     | watts |

MAXIMUM CIRCUIT VALUES

|                            | Unit No.1 | Unit No.2 |         |
|----------------------------|-----------|-----------|---------|
| Grid-Circuit Resistance:   |           |           |         |
| For fixed-bias operation   | 1         | 1         | megohm  |
| For cathode-bias operation | 2.2       | 2.2       | megohms |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

† A bias resistor or other means is required to protect the tube in absence of excitation.

**6FM8**


Refer to chart at end of section.

**6FQ5A**Refer to chart at end of section.  
For replacement use type 6GK5/6FQ5A.**6FQ7**

Refer to chart at end of section.

**6FQ7 /  
6CG7****MEDIUM-MU TWIN TRIODE****8FQ7/8CG7, 12FQ7**

Miniature type used as combined vertical- and horizontal-deflection oscillator in color and black-and-white television receivers. Outlines section, 6E; requires miniature 9-contact socket. Types 8FQ7/8CG7 and 12FQ7 are identical with type 6FQ7/6CG7 except for heater ratings. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section.



|  | 6FQ7/6CG7 | 8FQ7/8CG7 | 12FQ7     |         |
|--|-----------|-----------|-----------|---------|
| Heater Voltage (ac/dc) .....                   | 6.3       | 8.4       | 12.6      | volts   |
| Heater Current .....                           | 0.6       | 0.45      | —         | ampere  |
| Heater Warm-up Time (Average) .....            | 11        | —         | —         | seconds |
| Heater-Cathode Voltage:                        |           |           |           |         |
| Peak value .....                               | ±200 max  | ±200 max  | ±200 max  | volts   |
| Average value .....                            | 100 max   | 100 max   | 100 max   | volts   |
| Direct Interelectrode Capacitances (Approx.):  |           | Unit No.1 | Unit No.2 |         |
| Grid to Plate .....                            |           | 3.6       | 3.8       | pF      |
| Grid to Cathode and Heater .....               |           | 2.4       | 2.4       | pF      |
| Plate to Cathode and Heater .....              |           | 0.84      | 0.26      | pF      |
| Plate of Unit No.1 to Plate of Unit No.2 ..... |           | 1         |           | pF      |

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                             | 330 | volts |
| Grid Voltage, Positive-bias value .....         | 0   | volts |
| Cathode Current .....                           | 22  | mA    |
| Plate Dissipation:                              |     |       |
| For either plate .....                          | 4   | watts |
| For both plates with both units operating ..... | 5.7 | watts |

**CHARACTERISTICS**

|   |      |      |       |
|---|------|------|-------|
| Plate Voltage .....                                     | 90   | 250  | volts |
| Grid Voltage .....                                      | 0    | -8   | volts |
| Amplification Factor .....                              | 20   | 20   |       |
| Plate Resistance (Approx.) .....                        | 6700 | 7700 | ohms  |
| Transconductance .....                                  | 3000 | 2600 | μmhos |
| Plate Current .....                                     | 10   | 9    | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA ..... | -7   | -18  | volts |
| Plate Current for grid voltage of -12.5 volts .....     | —    | 1.3  | mA    |

**MAXIMUM CIRCUIT VALUE**

|   |   |        |
|---|---|--------|
| Grid Circuit Resistance, for fixed-bias operation ..... | 1 | megohm |
|---|---|--------|

**Oscillator**


For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   | Vertical-Deflection Oscillator | Horizontal-Deflection Oscillator |       |
|---|--------------------------------|----------------------------------|-------|
| DC Plate Voltage .....                          | 330                            | 330                              | volts |
| Peak Negative-Pulse Grid Voltage .....          | 440                            | 660                              | volts |
| Peak Cathode Current .....                      | 77                             | 330                              | mA    |
| Average Cathode Current .....                   | 22                             | 22                               | mA    |
| Plate Dissipation:                              |                                |                                  |       |
| For either plate .....                          | 4                              | 4                                | watts |
| For both plates with both units operating ..... | 5.7                            | 5.7                              | watts |

**MAXIMUM CIRCUIT VALUES**


|                               |     |     |         |
|-------------------------------|-----|-----|---------|
| Grid-Circuit Resistance ..... | 2.2 | 2.2 | megohms |
|-------------------------------|-----|-----|---------|

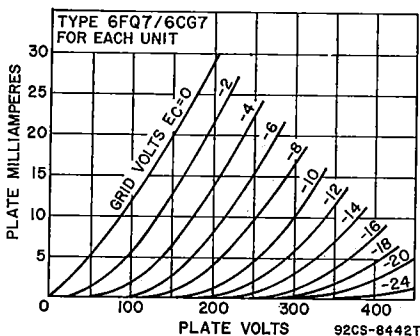

BEAM HEXODE

6FS5

2FS5, 3FS5



7GA

Miniature type used as rf-amplifier tube in vhf television receivers. In this tube, grid No.1 is the control grid, grid No.2 is a focusing grid, grid No.3 is the screen grid, and grid No.4 is the suppressor grid. Grid No.2 is internally connected to the cathode and grid No.4 and aligned with grid No.3. **Outlines section, 5C**; requires miniature 7-contact socket. Types 2FS5 and 3FS5 are identical with type 6FS5 except for heater ratings.

|   | 2FS5     | 3FS5     | 6FS5        |         |
|---|----------|----------|-------------|---------|
| Heater Voltage (ac/dc) .....  | 2.4      | 2.9      | 6.3         | volts   |
| Heater Current .....  | 0.6      | 0.45     | 0.2         | ampere  |
| Heater Warm-up Time (Average) .....                                     | 11       | 11       | —           | seconds |
| Heater-Cathode Voltage:   |          |          |             |         |
| Peak value .....  | ±200 max | ±200 max | ±200 max    | volts   |
| Average value .....   | 100 max  | 100 max  | 100 max     | volts   |
| Direct Interelectrode Capacitances:                                     |          | Shielded | Unshielded* |         |
| Grid No.1 to Plate .....  |          | 0.03     | 0.016       | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Grid No.4 ..... |          | 4.8      | 4.8         | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Grid No.4 .....     |          | 2        | 2.8         | pF      |

\* With external shield connected to pin 7.

Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Maximum Values)

|                                       |      |       |
|---------------------------------------|------|-------|
| Plate Voltage .....                   | 300  | volts |
| Grid-No.3 (Screen-Grid) Voltage ..... | 150  | volts |
| Grid-No.1 (Control-Grid) Voltage:     |      |       |
| Negative-bias value .....             | 50   | volts |
| Positive-bias value .....             | 0    | volts |
| Cathode Current .....                 | 20   | mA    |
| Plate Dissipation .....               | 3.25 | watts |
| Grid-No.3 Input .....                 | 0.15 | watt  |

CHARACTERISTICS

|   |       |        |
|---|-------|--------|
| Plate Voltage .....   | 275   | volts  |
| Grid-No.3 Voltage .....   | 135   | volts  |
| Grid-No.1 Voltage .....   | -0.2  | volt   |
| Plate Resistance (Approx.) .....                                    | 0.24  | megohm |
| Transconductance .....  | 10000 | μmhos  |
| Plate Current .....   | 9     | mA     |
| Grid-No.3 Current .....   | 0.17  | mA     |
| Grid-No.1 Voltage (Approx.) for transconductance of 100 μmhos ..... | -5    | volts  |

MAXIMUM CIRCUIT VALUE

|  |     |        |
|--|-----|--------|
| Grid-No.1-Circuit Resistance, for fixed-bias operation ..... | 0.5 | megohm |
|--|-----|--------|

Refer to chart at end of section.


6FV6

|                  |  |
|------------------|--|
| <b>6FV8</b>      | Refer to chart at end of section.  |
| <b>6FV8A</b>     | Refer to chart at end of section.<br>For replacement use type 6BR8A/6FV8A. |
| <b>6FW5</b>      | Refer to chart at end of section.  |
| <b>6FW8</b>      | Refer to chart at end of section.  |
| <b>6FY5/EC97</b> | Refer to chart at end of section.  |

**6FY7**

11FY7, 15FY7

Duodecar type used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers. Triode unit No.1 is used as an oscillator, and triode unit No.2 is used as an amplifier. Outlines section, 8D; requires duodecar 12-contact socket. Types 11FY7 and 15FY7 are identical with type 6FY7 except for heater ratings.

**12E0**

|                               |             |             |               |         |
|-------------------------------|-------------|-------------|---------------|---------|
| Heater Voltage (ac/dc)        | 6FY7<br>6.3 | 11FY7<br>11 | 15FY7<br>14.7 | volts   |
| Heater Current                | 1.05        | 0.6         | 0.45          | amperes |
| Heater Warm-up Time (Average) | —           | 11          | 11            | seconds |
| Heater-Cathode Voltage:       |             |             |               |         |
| Peak value                    | ±200 max    | ±200 max    | ±200 max      | volts   |
| Average value                 | 100 max     | 100 max     | 100 max       | volts   |

**Class A<sub>1</sub> Amplifier****CHARACTERISTICS**

|   | Unit No.1 | Unit No.2 |       |
|---|-----------|-----------|-------|
| Plate Voltage   | 250       | 150       | volts |
| Grid Voltage  | -3        | -17.5     | volts |
| Amplification Factor                                  | 65        | 6         |       |
| Plate Resistance (Approx.)                            | 40500     | 920       | ohms  |
| Transconductance                                      | 1600      | 6500      | μmhos |
| Plate Current   | 1.4       | —         | mA    |
| Grid Voltage (Approx.) for plate current of 30 μA     | -5.5      | —         | volts |
| Grid Voltage (Approx.) for plate current of 50 μA     | —         | -36       | volts |
| Plate Current (Approx.) for grid voltage of -25 volts | —         | 6         | mA    |

**Vertical-Deflection Oscillator and Amplifier**

For operation in a 525-line, 30-frame system

|  | Unit No.1<br>Oscillator | Unit No.2<br>Amplifier |       |
|--|-------------------------|------------------------|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b> |                         |                        |       |
| DC Plate Voltage                               | 330                     | 275                    | volts |
| Peak Positive-Pulse Plate Voltage*             | —                       | 2000                   | volts |
| Peak Negative-Pulse Plate Voltage              | 400                     | 250                    | volts |
| Peak Cathode Current                           | 70                      | 175                    | mA    |
| Average Cathode Current                        | 20                      | 50                     | mA    |
| Plate Dissipation                              | 1                       | 7†                     | watts |

**MAXIMUM CIRCUIT VALUES**

|                         |     |     |         |
|-------------------------|-----|-----|---------|
| Grid-Circuit Resistance | 2.2 | 2.2 | megohms |
|-------------------------|-----|-----|---------|

\* Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).


† A bias resistor or other means is required to protect the tube in absence of excitation.

|              |  |
|--------------|--|
| <b>6G6G</b>  | Refer to chart at end of section.      |
| <b>6G11</b>  | Refer to chart at end of section.      |
| <b>6GB3A</b> | For replacement use type 6BQ6GTB/6CU6. |
| <b>6GB5</b>  | Refer to chart at end of section.      |

# 6GB5/ EL500

## BEAM POWER TUBE

13GB5/XL500,  
18GB5/LL500  
27GB5/PL500



Magnoval type used as horizontal-deflection amplifier in television receivers. Outlines section, 35B; requires neonoval 9-contact socket. Typical instantaneous characteristics (measured with recurrent waveform such that maximum ratings are not exceeded): plate volts, 75; grid-No.2 volts, 200; grid-No.1 volts, -10; plate mA, 440; grid-No.2 mA, 37. Types 13GB5/XL500, 18GB5/LL500 and 27GB5/PL500 are identical with type 6GB5/EL500 except for heater ratings.

|                         | 6GB5/<br>EL500 | 13GB5/<br>XL500 | 18GB5/<br>LL500 | 27GB5/<br>PL500 |         |
|-------------------------|----------------|-----------------|-----------------|-----------------|---------|
| Heater Voltage (ac/dc)  | 6.3            | 13.3            | 18              | 27              | volts   |
| Heater Current          | 1.38           | 0.6             | 0.45            | 0.3             | amperes |
| Heater-Cathode Voltage: |                |                 |                 |                 |         |
| Peak value              | ±250 max       | ±250 max        | ±250 max        | ±250 max        | volts   |
| Average value           | 125 max        | 125 max         | 125 max         | 125 max         | volts   |

### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                    |      |       |
|------------------------------------|------|-------|
| DC Plate Voltage                   | 275  | volts |
| Peak Positive-Pulse Plate Voltage# | 7700 | volts |
| DC Grid-No.2 (Screen-Grid) Voltage | 275  | volts |
| Average Cathode Current            | 275  | mA    |
| Plate Dissipation <sup>▲</sup>     | 17   | watts |
| Grid-No.2 Input*                   | 5    | watts |

#### MAXIMUM CIRCUIT VALUES

|  |     |         |
|--|-----|---------|
| Grid-No.1-Circuit Resistance:                      |     |         |
| Without grid current                               | 0.5 | megohm  |
| With grid current (horizontal-output service only) | 2.2 | megohms |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

▲ A bias resistor or other means is required to protect the tube in absence of excitation.


\* Grid-No.2 input may reach 6 watts for plate-dissipation values below 11 watts.

For replacement use type 6GW6/6DQ6B.

**6GB6**

For replacement use type 6GW6/6DQ6B.

**6GB7**



## BEAM POWER TUBE

# 6GC5

Miniature type used in color and black-and-white television receiver applications and as output tube in audio-amplifier applications. Outlines section, 6E, requires miniature 9-contact socket.

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc)                                 | 6.3      | volts   |
| Heater Current   | 1.2      | amperes |
| Heater-Cathode Voltage:                                |          |         |
| Peak value   | ±200 max | volts   |
| Average value  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):          |          |         |
| Grid No.1 to Plate                                     | 0.9      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 18       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | 7        | pF      |

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|                                 |     |       |
|---------------------------------|-----|-------|
| Plate Voltage                   | 220 | volts |
| Grid-No.2 (Screen-Grid) Voltage | 140 | volts |
| Plate Dissipation               | 12  | watts |
| Grid-No.2 Input                 | 1.4 | watts |

## TYPICAL OPERATION AND CHARACTERISTICS

|                                  |       |       |          |
|----------------------------------|-------|-------|----------|
| Plate Voltage                    | 110   | 200   | volts    |
| Grid-No.2 Voltage                | 110   | 125   | volts    |
| Grid-No.1 Voltage                | -7.5  | —     | volts    |
| Cathode-Bias Resistor            | —     | 180   | ohms     |
| Peak AF Grid-No.1 Voltage        | 7.5   | 8.5   | volts    |
| Zero-Signal Plate Current        | 49    | 46    | mA       |
| Maximum-Signal Plate Current     | 50    | 47    | mA       |
| Zero-Signal Grid-No.2 Current    | 4     | 2.2   | mA       |
| Maximum-Signal Grid-No.2 Current | 10    | 8.5   | mA       |
| Plate Resistance (Approx.)       | 13000 | 28000 | ohms     |
| Transconductance                 | 8000  | 8000  | μmhos    |
| Load Resistance                  | 2000  | 4000  | ohms     |
| Total Harmonic Distortion        | 10    | 10    | per cent |
| Maximum-Signal Power Output      | 2.1   | 3.8   | watts    |

## MAXIMUM CIRCUIT VALUES


|                               |     |  |        |
|-------------------------------|-----|--|--------|
| Grid-No.1-Circuit Resistance: |     |  |        |
| For fixed-bias operation      | 0.1 |  | megohm |
| For cathode-bias operation    | 0.5 |  | megohm |

## 6GE5

12GE5, 17GE5

## BEAM POWER TUBE

Duodecar type used as horizontal-deflection-amplifier tube in television receivers. Outlines section, 15A; requires duodecar 12-contact socket. Types 12GE5 and 17GE5 are identical with type 6GE5 except for heater ratings.



12BJ

|                               |             |               |               |         |
|-------------------------------|-------------|---------------|---------------|---------|
| Heater Voltage (ac/dc)        | 6GE5<br>6.3 | 12GE5<br>12.6 | 17GE5<br>16.8 | volts   |
| Heater Current                | 1.2         | 0.6           | 0.45          | amperes |
| Heater Warm-up Time (Average) | —           | 11            | 11            | seconds |
| Heater-Cathode Voltage:       |             |               |               |         |
| Peak value                    | ±200 max    | ±200 max      | ±200 max      | volts   |
| Average value                 | 100 max     | 100 max       | 100 max       | volts   |

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|   | Pentode Connection | Triode* Connection |       |
|---|--------------------|--------------------|-------|
| Plate Voltage   | 60                 | 250                | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 150                | 150                | volts |
| Grid-No.1 (Control-Grid) Voltage                      | 0                  | -22.5              | volts |
| Amplification Factor                                  | —                  | 4.4                |       |
| Plate Resistance (Approx.)                            | —                  | 18000              | ohms  |
| Transconductance                                      | —                  | 7300               | μmhos |
| Plate Current   | 345*               | 65                 | mA    |
| Grid-No.2 Current                                     | 27*                | 1.8                | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | —                  | -42                | volts |

\* Grid No.2 tied to plate.

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

## Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Maximum Values)

|                                       |      |       |
|---------------------------------------|------|-------|
| DC Plate Supply Voltage               | 770  | volts |
| Peak Positive-Pulse Plate Voltage#    | 6500 | volts |
| Peak Negative-Pulse Plate Voltage     | 1500 | volts |
| DC Grid-No.2 Voltage                  | 220  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage | 330  | volts |



|   |      |       |
|---|------|-------|
| DC Grid-No.1 Voltage .....                | -55  | volts |
| Peak Cathode Current .....                | 550  | mA    |
| Average Cathode Current .....             | 175  | mA    |
| Plate Dissipation† .....                  | 17.5 | watts |
| Grid-No.2 Input .....                     | 3.5  | watts |
| Bulb Temperature (At hottest point) ..... | 200  | °C    |

**MAXIMUM CIRCUIT VALUE**

|                                    |   |        |
|------------------------------------|---|--------|
| Grid-No.1 Circuit Resistance ..... | 1 | megohm |
|------------------------------------|---|--------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).


† A bias resistor or other means is required to protect the tube in absence of excitation.

Refer to chart at end of section.

**6GF5**

Refer to chart at end of section.

**6GF7**



**DUAL TRIODE**

**6GF7A**

10GF7A, 13GF7A

**9QD**

Novar types used as combined vertical-deflection oscillator and vertical-deflection amplifiers in color and black-and-white television receivers. Outlines section, 30A; requires novar 9-contact socket. For curves of average plate characteristics for Unit No.1 and Unit No.2, refer to types 6DR7 (Unit No.1) and 6EM7, respectively. Types 10GF7A and 13GF7A are identical with type 6GF7A except for heater ratings.

|   |              |               |              |         |
|---|--------------|---------------|--------------|---------|
| Heater Voltage (ac/dc) .....                  | 6GF7A<br>6.3 | 10GF7A<br>9.7 | 13GF7A<br>13 | volts   |
| Heater Current .....                          | 0.985        | 0.6           | 0.45         | ampere  |
| Heater Warm-up Time (Average) .....           | —            | 11            | 11           | seconds |
| Heater-Cathode Voltage:                       |              |               |              |         |
| Peak value .....                              | ±200 max     | ±200 max      | ±200 max     | volts   |
| Average value .....                           | 100 max      | 100 max       | 100 max      | volts   |
| Direct Interelectrode Capacitances (Approx.): |              | Unit No.1     | Unit No.2    |         |
| Grid to Plate .....                           |              | 4.6           | 9            | pF      |
| Grid to Cathode and Heater .....              |              | 2.4           | 6.5          | pF      |
| Plate to Cathode and Heater .....             |              | 0.26          | 1.4          | pF      |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|   | Unit No.1 | Unit No.2 |       |
|---|-----------|-----------|-------|
| Plate Voltage .....                                       | 250       | 150       | volts |
| Grid Voltage .....  | -3        | -20       | volts |
| Amplification Factor .....                                | 64        | 5.4       |       |
| Plate Resistance (Approx.) .....                          | 40000     | 750       | ohms  |
| Transconductance .....                                    | 1600      | 7200      | μmhos |
| Grid Voltage (Approx.):                                   |           |           |       |
| For plate current of 10 μA .....                          | -5.5      | —         | volts |
| For plate current of 100 μA .....                         | —         | -45       | volts |
| Plate Current .....                                       | 1.4       | 50        | mA    |
| For plate voltage of 60 volts and zero grid voltage ..... | —         | 95        | mA    |
| For grid voltage of -28 volts .....                       | —         | 10        | mA    |

**Vertical-Deflection Oscillator and Amplifier**

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Maximum Values)                        | Unit No.1<br>Oscillator | Unit No.2<br>Amplifier |       |
|--|-------------------------|------------------------|-------|
| DC Plate Voltage .....   | 330                     | 330                    | volts |
| Peak Positive-Pulse Plate Voltage<br>(Absolute Maximum)# ..... | —                       | 1500*                  | volts |
| Peak Negative-Pulse Grid Voltage .....                         | 400                     | 250                    | volts |
| Peak Cathode Current .....                                     | 77                      | 175                    | mA    |
| Average Cathode Current .....                                  | 22                      | 50                     | mA    |
| Plate Dissipation .....  | 1.5                     | 11                     | watts |

**MAXIMUM CIRCUIT VALUES**

Grid-Circuit Resistance:  
 For grid-resistor-bias or cathode-bias operation . . . . . 2.2 . . . . . 2.2 . . . . . megohms  
 • Under no circumstances should this absolute value be exceeded.  
 # Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).


Refer to chart at end of section.

**6GH8****6GH8A**

5GH8A, 9GH8A

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used in multivibrator-type horizontal-deflection circuits and for agc-amplifier or sync-separator applications in color and black-and-white television receivers. Outlines section, 6B; requires miniature 9-contact socket. Types 5GH8A and 9GH8A are identical with type 6GH8A except for heater ratings.



9AE

|  | 5GH8A    | 6GH8A    | 9GH8A    |         |
|--|----------|----------|----------|---------|
| Heater Voltage (ac/dc) . . . . .   | 4.7      | 6.3      | 9.45     | volts   |
| Heater Current . . . . .   | 0.6      | 0.45     | 0.3      | ampere  |
| Heater Warm-up Time (Average) . . . . .  | 11       | 11       | —        | seconds |
| <b>Heater-Cathode Voltage:</b>   |          |          |          |         |
| Peak value . . . . .   | ±200 max | ±200 max | ±200 max | volts   |
| Average value . . . . .  | 100 max  | 100 max  | 100 max  | volts   |
| <b>Direct Interelectrode Capacitances:</b>   |          |          |          |         |
| <b>Triode Unit:</b>  |          |          |          |         |
| Grid to Plate . . . . .  |          | 1.7      | 1.7      | pF      |
| Grid to Cathode, Heater, Pentode Grid No.3,<br>Pentode Cathode, and Internal Shield . . . . .  |          | 3        | 3.2      | pF      |
| Plate to Cathode, Heater, Pentode Grid No.3,<br>Pentode Cathode, and Internal Shield . . . . . |          | 1.4      | 1.9      | pF      |
| Heater to Cathode . . . . .  |          | 3        | 3        | pF      |
| <b>Pentode Unit:</b>   |          |          |          |         |
| Grid No.1 to Plate . . . . .   |          | 0.02 max | 0.01 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2,<br>Grid No.3, and Internal Shield . . . . .           |          | 5        | 5        | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield . . . . .               |          | 2.6      | 3.4      | pF      |
| Heater to Cathode, Grid No.3, and Internal Shield . . . . .                                    |          | 3        | 3        | pF      |

**Class A<sub>1</sub> Amplifier****CHARACTERISTICS**



|   | Triode Unit | Pentode Unit |       |
|---|-------------|--------------|-------|
| Plate Voltage . . . . .   | 125         | 125          | volts |
| Grid-No.2 Voltage . . . . .   | —           | 125          | volts |
| Grid-No.1 Voltage . . . . .   | —1          | —1           | volts |
| Amplification Factor . . . . .                                      | 46          | —            |       |
| Plate Resistance (Approx.) . . . . .                                | 5400        | 200000       | ohms  |
| Transconductance . . . . .  | 8500        | 7500         | μmhos |
| Plate Current . . . . .   | 13.5        | 12           | mA    |
| Grid-No.2 Current . . . . .   | —           | 4            | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of<br>10 μA . . . . . | —8          | —8           | volts |

**Horizontal-Deflection Oscillator**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   | Triode Unit | Pentode Unit |       |
|---|-------------|--------------|-------|
| Plate Voltage . . . . .                   | 330         | 350          | volts |
| Grid-No.2 (Screen-Grid) Voltage . . . . . | —           | 330          | volts |
| <b>Grid-No.1 (Control-Grid) Voltage:</b>  |             |              |       |
| Positive-bias value . . . . .             | 0           | 0            | volts |
| Peak negative value . . . . .             | —           | 175          | volts |
| Peak Cathode Current . . . . .            | —           | 300          | mA    |
| Average Cathode Current . . . . .         | —           | 20           | mA    |
| Plate Dissipation . . . . .               | 2.5         | 2.5          | watts |
| Grid-No.2 Input . . . . .                 | —           | 0.55         | watt  |

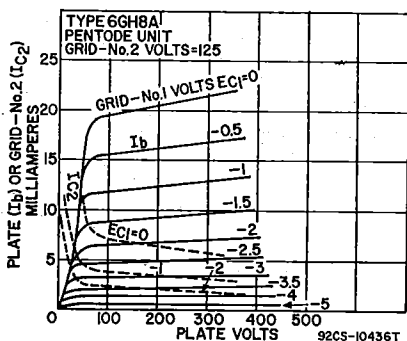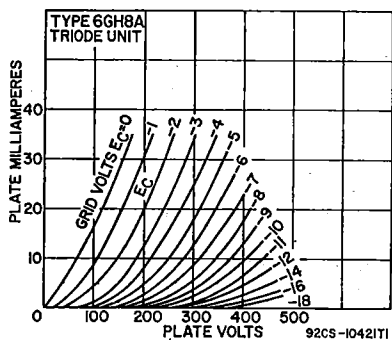

**MAXIMUM CIRCUIT VALUES**

|                                |     |     |         |
|--------------------------------|-----|-----|---------|
| Grid-No. 1-Circuit Resistance: |     |     |         |
| For fixed-bias operation       | 2.2 | 2.2 | megohms |
| For cathode-bias operation     | 2.2 | 2.2 | megohms |

Refer to chart at end of section.


**6GJ5**

**BEAM POWER TUBE**

**6GJ5A**

12GJ5A, 17GJ5A

Novar type used in high-efficiency horizontal-deflection-amplifier circuits of television receivers. Outlines section, 32A; requires novar 9-contact socket. For curve of average characteristics see type 6GW6. Types 12GJ5A and 17GJ5A are identical with type 6GJ5A except for heater ratings.



|   |          |          |          |         |
|---|----------|----------|----------|---------|
| Heater Voltage (ac/dc)                                    | 6GJ5A    | 12GJ5A   | 17GJ5A   |         |
| Heater Current  | 6.3      | 12.6     | 16.8     | volts   |
| Heater Warm-up Time (Average)                             | 1.2      | 0.6      | 0.45     | amperes |
| Heater-Cathode Voltage:                                   |          | 11       | 11       | seconds |
| Peak value  | ±200 max | ±200 max | ±200 max | volts   |
| Average value   | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):             |          |          |          |         |
| Grid No. 1 to Plate                                       |          |          | 0.26     | pF      |
| Grid No. 1 to Cathode, Heater, Grid No. 2, and Grid No. 3 |          |          | 15       | pF      |
| Plate to Cathode, Heater, Grid No. 2, and Grid No. 3      |          |          | 6.5      | pF      |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|  | Triode Connection | Pentode Connection |       |
|--|-------------------|--------------------|-------|
| Plate Voltage                                | 150               | 60                 | 250   |
| Grid-No. 2 Voltage                           | 150               | 150                | 150   |
| Grid-No. 1 Voltage                           | -22.5             | 0                  | -22.5 |
| Mu-Factor, Grid No. 2 to Grid No. 1          | 4.4               | —                  | —     |
| Plate Resistance (Approx.)                   | —                 | —                  | 15000 |
| Transconductance                             | —                 | —                  | 7100  |
| Plate Current                                | —                 | —                  | —     |
| Grid-No. 2 Current                           | —                 | 390 <sup>μ</sup>   | 70    |
| Grid-No. 1 Current                           | —                 | 32 <sup>μ</sup>    | 2.1   |
| Grid-No. 1 Voltage for plate current of 1 mA | —                 | —                  | -42   |

• This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                    |      |       |
|------------------------------------|------|-------|
| DC Plate Supply Voltage            | 770  | volts |
| Peak Positive-Pulse Plate Voltage# | 6500 | volts |
| Peak Negative-Pulse Plate Voltage  | 1500 | volts |

|   |      |       |
|---|------|-------|
| DC Grid-No.2 Voltage .....                  | 220  | volts |
| DC Grid-No.1 Voltage .....                  | -55  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Peak Cathode Current .....                  | 550  | mA    |
| Average Cathode Current .....               | 175  | mA    |
| Plate Dissipation* .....                    | 17.5 | watts |
| Grid-No.2 Input .....                       | 3.5  | watts |
| Bulb Temperature (at hottest point) .....   | 240  | °C    |

**MAXIMUM CIRCUIT VALUE**

Grid-No.1-Circuit Resistance:

For grid-resistor-bias operation\* ..... 1 megohm

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).


\* A bias resistor or other means is required to protect the tube in absence of excitation.

**6GJ7**

Refer to chart at end of section.

**6GJ7/  
ECF801**4GJ7/XCF801  
5GJ7/LCF801  
8GJ7/PCF801**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature types used as combined oscillator and mixer tubes in color and black-and-white television receivers utilizing an intermediate frequency in the order of 40 MHz. Outlines section, 6J; requires miniature 9-contact socket. Types 4GJ7/XCF801, 5GJ7/LCF801, and 8GJ7/PCF801 are identical with type 6GJ7/ECF801 ratings.

**9QA**

except for heater

|                                    | 4GJ7/<br>XCF801 | 5GJ7/<br>LCF801 | 6GJ7/<br>ECF801 | 8GJ7/<br>PCF801 |        |
|------------------------------------|-----------------|-----------------|-----------------|-----------------|--------|
| Heater Voltage (ac/dc) .....       |                 |                 |                 |                 | volts  |
| Heater Current .....               | 4.1             | 5.6             | 6.3             | 8               | ampere |
| Peak Heater-Cathode Voltage* ..... | 0.6             | 0.45            | 0.41            | 0.3             | volts  |
|                                    | ±110 max        | ±110 max        | ±100 max        | ±110 max        |        |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|  | Triode Unit | Pentode Unit |       |
|--|-------------|--------------|-------|
| Plate-Supply Voltage .....                   | 600         | 600          | volts |
| DC Plate Voltage .....                       | 140         | 275          | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage ..... | —           | 600          | volts |
| DC Grid-No.2 Voltage .....                   | —           | 275          | volts |
| DC Grid-No.1 (Control-Grid) Voltage .....    | —           | -50          | volts |
| Cathode Current .....                        | 22          | 20           | mA    |
| Plate Dissipation .....                      | 1.8         | 2.4          | watts |
| Grid-No.2 Input* .....                       | —           | 0.55         | watt  |

**CHARACTERISTICS**

|   |          |          |         |
|---|----------|----------|---------|
| DC Plate Voltage .....                                  | 100      | 170      | volts   |
| DC Grid-No.2 Voltage .....                              | —        | 120      | volts   |
| DC Grid-No.1 Voltage .....                              | -3       | -1.2     | volts   |
| Amplification Factor .....                              | 20       | 55*      |         |
| Plate Resistance (Approx.) .....                        | —        | 0.35     | megohm  |
| Transconductance .....                                  | 9000     | 11000    | μmhos   |
| Plate Current .....                                     | 15       | 10       | mA      |
| Grid-No.2 Current .....                                 | —        | 3        | mA      |
| Grid-No.1 Voltage for grid-No.1 current of 0.3 μA ..... | -1.3 max | -1.3 max | volts   |
| Grid-No.1-Circuit Resistance:                           |          |          |         |
| For fixed-bias operation .....                          | 0.5      | 1        | megohm  |
| For cathode-bias operation .....                        | 0.5      | 2.2      | megohms |

▲ The hum should be minimized in intercarrier applications by limiting the heater-cathode voltage to 100 volts rms, and in AM receivers to 50 volts rms.

\* Grid No.2 to grid No.1, approximate value.

• When control-grid bias is between -1.5 and -2 volts, screen-grid dissipation is limited to 0.50 watt. When this bias is greater than -2 volts, maximum screen-grid dissipation is 0.36 watt.


**6GJ8**

Refer to chart at end of section.

# 6GK5 6GK5/ 6FQ5A

2GK5/2FQ5A,  
3GK5, 4GK5

## HIGH-MU TRIODE



Miniature type with frame grid used as grounded-cathode rf-amplifier tube in vhf tuners of color and black-and-white television receivers. Outlines section, 5C; requires miniature 7-contact socket. Types 2GK5/2FQ5A, 3GK5, and 4GK5 are identical with type 6GK5 except for heater ratings.

|  | 2GK5/2FQ5A | 3GK5     | 4GK5     | 6GK5<br>6GK5/6FQ5A |         |
|--|------------|----------|----------|--------------------|---------|
| Heater Voltage (ac/dc)                         | 2.3        | 2.8      | 4        | 6.3                | volts   |
| Heater Current                                 | 0.6        | 0.45     | 0.3      | 0.18               | ampere  |
| Heater Warm-up Time (Average)                  | 11         | 11       | 11       | —                  | seconds |
| Peak Heater-Cathode Voltage                    | ±100 max   | ±100 max | ±100 max | ±100 max           | volts   |
| Direct Interelectrode Capacitances (Approx.):* |            |          |          |                    |         |
| Grid to Plate                                  |            |          |          | 0.52               | pF      |
| Grid to Cathode, Heater, and Internal Shield   |            |          |          | 5                  | pF      |
| Plate to Cathode, Heater, and Internal Shield  |            |          |          | 3.5                | pF      |
| Heater to Cathode                              |            |          |          | 2.5*               | pF      |

\* With external shield connected to cathode, except as noted.

▪ With external shield and internal shield connected to ground.


### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|                         |     |       |
|-------------------------|-----|-------|
| Plate Voltage           | 200 | volts |
| Grid Voltage:           |     |       |
| Negative-bias value     | 50  | volts |
| Positive-bias value     | 0   | volts |
| Average Cathode Current | 22  | mA    |
| Plate Dissipation       | 2.5 | watts |

#### CHARACTERISTICS

|   |       |       |
|---|-------|-------|
| Plate Voltage   | 135   | volts |
| Grid Voltage  | -1    | volts |
| Amplification Factor                                      | 78    |       |
| Plate Resistance (Approx.)                                | 5400  | ohms  |
| Transconductance  | 15000 | μmhos |
| Plate Current   | 11.5  | mA    |
| Input Resistance*   | 275   | ohms  |
| Input Capacitance*  | 11.2  | pF    |
| Noise Figure†   | 4.7   | dB    |
| Grid Voltage (Approx.) for transconductance of 150 μmhos  | -4.2  | volts |
| Grid Voltage (Approx.) for transconductance of 1500 μmhos | -2.5  | volts |

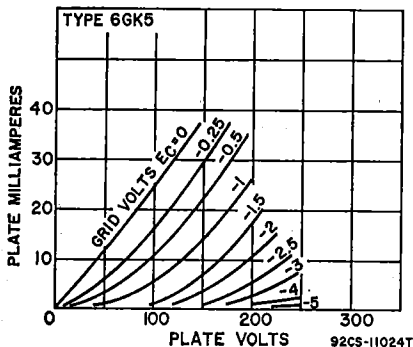

**MAXIMUM CIRCUIT VALUE**


Grid-Circuit Resistance, for cathode-bias operation ..... 1 megohm

\* Measured at 200 MHz with heater volts = 6.3 and plate effectively grounded for rf voltages.

† For a neutralized triode amplifier at a frequency of 200 MHz with signal source impedance adjusted for minimum noise output.

**6GK6****POWER PENTODE****10GK6, 16GK6**

Miniature type used in the output stage of audio amplifying equipment and also in the video output stage of color and black-and-white television receivers. Outlines section, 6G; requires miniature 9-contact socket. Types 10GK6 and 16GK6 are identical with type 6GK6 except for heater ratings.

**9GK**

|   | 6GK6     | 10GK6    | 16GK6    |         |
|---|----------|----------|----------|---------|
| Heater Voltage (ac/dc) .....  | 6.3      | 10       | 16       | volts   |
| Heater Current .....  | 0.76     | 0.45     | 0.3      | ampere  |
| Heater Warm-up Time (Average) .....   | —        | 11       | 11       | seconds |
| Peak Heater-Cathode Voltage .....   | ±100 max | ±100 max | ±100 max | volts   |
| Direct Interelectrode Capacitances:   |          |          |          |         |
| Grid No.1 to Plate .....  |          |          | 0.14 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... |          |          | 10       | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     |          |          | 7        | pF      |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| Plate Supply Voltage .....                                  | 605  | volts |
| Plate Voltage .....   | 330  | volts |
| Grid-No.2 Supply Voltage .....                              | 605  | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                       | 330  | volts |
| Grid-No.1 (Control-Grid) Voltage, Negative-bias value ..... | 100  | volts |
| Cathode Current .....                                       | 65   | mA    |
| Plate Dissipation .....                                     | 13.2 | watts |
| Grid-No.2 Input, Peak .....                                 | 4    | watts |
| Grid-No.2 Input, Average .....                              | 2    | watts |

**CHARACTERISTICS AND TYPICAL OPERATION**

|   |       |          |
|---|-------|----------|
| Plate Supply Voltage .....              | 250   | volts    |
| Grid-No.2 Supply Voltage .....          | 250   | volts    |
| Cathode-Bias Resistor .....             | 135   | ohms     |
| Mu-Factor, Grid No.2 to Grid No.1 ..... | 19    |          |
| Plate Resistance (Approx.) .....        | 38000 | ohms     |
| Transconductance .....                  | 11300 | μmhos    |
| Peak AF Grid-No.1 Voltage .....         | 7.3   | volts    |
| Zero-Signal Plate Current .....         | 48    | mA       |
| Maximum-Signal Plate Current .....      | 50.6  | mA       |
| Zero-Signal Grid-No.2 Current .....     | 5.5   | mA       |
| Maximum-Signal Grid-No.2 Current .....  | 10    | mA       |
| Effective Load Resistance .....         | 5200  | ohms     |
| Total Harmonic Distortion .....         | 10    | per cent |
| Maximum-Signal Power Output .....       | 5.7   | watts    |

**Push-Pull Class AB<sub>1</sub> and Class B Amplifier****MAXIMUM RATINGS (Same as for Class A<sub>1</sub> Amplifier)****TYPICAL OPERATION (Values are for two tubes)**


|  | Class AB <sub>1</sub> |      | Class B |       |          |
|--|-----------------------|------|---------|-------|----------|
| Plate Voltage .....                              | 250                   | 300  | 250     | 300   | volts    |
| Grid-No.2 Voltage .....                          | 250                   | 300  | 250     | 300   | volts    |
| Grid-No.1 Voltage .....                          | —                     | —    | -11.6   | -14.7 | volts    |
| Cathode-Bias Resistor .....                      | 130                   | 130  | —       | —     | ohms     |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage .....     | 22.4                  | 28   | 22.4    | 28    | volts    |
| Zero-Signal Plate Current .....                  | 62                    | 72   | 20      | 15    | mA       |
| Maximum-Signal Plate Current .....               | 75                    | 92   | 75      | 92    | mA       |
| Zero-Signal Grid-No.2 Current .....              | 7                     | 8    | 2.2     | 1.6   | mA       |
| Maximum-Signal Grid-No.2 Current .....           | 15                    | 22   | 15      | 22    | mA       |
| Effective Load Resistance (plate to plate) ..... | 8000                  | 8000 | 8000    | 8000  | ohms     |
| Total Harmonic Distortion .....                  | 3                     | 4    | 3       | 4     | per cent |
| Maximum-Signal Power Output .....                | 11                    | 17   | 11      | 17    | watts    |

**MAXIMUM CIRCUIT VALUES**

Grid-No.1-Circuit Resistance:

For fixed-bias operation ..... 0.3  
 For cathode-bias operation ..... 1

megohm  
 megohm

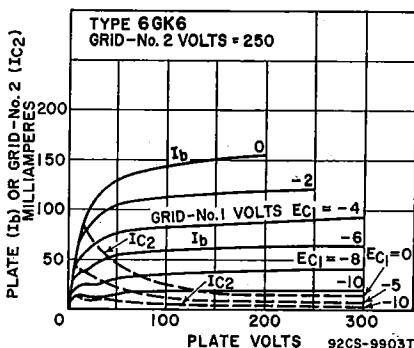

For replacement use type 6AU4GTA.

**6GK17**

Refer to chart at end of section.


**6GL7**

Refer to chart at end of section.

**6GM5**

**SEMIREMOTE-CUTOFF  
 PENTODE**

**6GM6**  
 5GM6



**7CM**

Miniature type used in gain-controlled picture-if stages of color and black-and-white television receivers operating at intermediate frequencies in the order of 40 MHz. Outlines section, 5C; requires 7-contact socket. Type 5GM6 is identical with type 6GM6 except for heater ratings.

|   | 5GM6       | 6GM6      |         |
|---|------------|-----------|---------|
| Heater Voltage (ac/dc) .....  | 5.6        | 6.3       | volts   |
| Heater Current .....  | 0.45       | 0.4       | ampere  |
| Heater Warm-up Time (Average) .....   | 11         | —         | seconds |
| Heater-Cathode Voltage:   |            |           |         |
| Peak value .....  | ±200 max   | ±200 max  | volts   |
| Average value .....   | 100 max    | 100 max   | volts   |
| Direct Interelectrode Capacitances:   |            |           |         |
| Grid No.1 to Plate .....  | Unshielded | Shielded* |         |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 0.036 max  | 0.026 max | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     | 10         | 10        | pF      |
|   | 2.4        | 3.4       | pF      |

\* With external shield connected to cathode.


**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value .....   | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 3.1                | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 0.65               | watt  |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

**CHARACTERISTICS**

|  |                                |            |
|--|--------------------------------|------------|
| Plate Supply Voltage .....   | 125                            | volts      |
| Grid No.3 .....  | Connected to cathode at socket |            |
| Grid-No.2 Supply Voltage .....                                       | 125                            | volts      |
| Cathode-Bias Resistor .....  | 56                             | ohms       |
| Plate Resistance (Approx.) .....                                     | 0.2                            | megohm     |
| Transconductance .....   | 13000                          | $\mu$ mhos |
| Plate Current .....  | 14                             | mA         |
| Grid-No.2 Current .....  | 3.4                            | mA         |
| Grid-No.1 Voltage (Approx.) for transconductance of 60 $\mu$ mhos .. | -15                            | volts      |

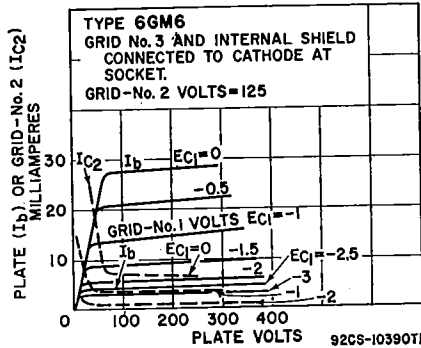


**6GN8**

8GN8/8EB8  
10GN8

**HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used in color and black-and-white television receiver applications. Triode unit is used as sync-separator, sync-clipper, phase inverter, or sound-if amplifier. Pentode unit is used in output stage of video amplifier. Outlines section, 6E; requires miniature 9-contact socket. For direct interelectrode capacitances, refer to type 6EB8; curve for average plate characteristics of triode unit is same as for type 6EB8. Types 8GN8/8EB8, and 10GN8 are identical with type 6GN8 except for heater ratings.



**9DX**

|                                     |               |                  |               |         |
|-------------------------------------|---------------|------------------|---------------|---------|
|                                     | <b>6GN8</b>   | <b>8GN8/8EB8</b> | <b>10GN8</b>  |         |
| Heater Voltage (ac/dc) .....        | 6.3           | 8                | 10.5          | volts   |
| Heater Current .....                | 0.75          | 0.6              | 0.45          | ampere  |
| Heater Warm-up Time (Average) ..... | —             | 11               | 11            | seconds |
| Heater-Cathode Voltage:             |               |                  |               |         |
| Peak value .....                    | $\pm 200$ max | $\pm 200$ max    | $\pm 200$ max | volts   |
| Average value .....                 | 100 max       | 100 max          | 100 max       | volts   |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage .....   | 330         | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —           | 330                | volts |
| Grid-No.2 Voltage .....                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0           | 0                  | volt  |
| Plate Dissipation .....                                     | 1           | 5                  | watts |
| Grid-No.2 Input:  |             |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | —           | 1.1                | watts |
| For grid-No.2 voltages between 165 and 330 volts .....      | —           | See curve page 300 |       |

**CHARACTERISTICS**

|                                  | Triode Unit | Pentode Unit |       |
|----------------------------------|-------------|--------------|-------|
| Plate Supply Voltage .....       | 250         | 60           | 200   |
| Grid-No.2 Supply Voltage .....   | —           | 150          | 150   |
| Grid-No.1 Voltage .....          | -2          | 0            | —     |
| Grid-No.1 Voltage .....          | —           | —            | 100   |
| Cathode-Bias Resistor .....      | 100         | —            | —     |
| Amplification Factor .....       | 37000       | —            | 60000 |
| Plate Resistance (Approx.) ..... | —           | —            | —     |




|  |             |                 |            |
|--|-------------|-----------------|------------|
| Transconductance .....   | Triode Unit | Pentode Unit    |            |
| Plate Current .....  | 2700        | 11500           | $\mu$ mhos |
| Grid-No.2 Current .....  | 2           | 55 <sup>m</sup> | mA         |
| Grid Voltage (Approx.) for plate current of 20 $\mu$ A .....       | —           | 18 <sup>m</sup> | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | —5          | —               | volts      |
|  | —           | —10             | volts      |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |      |        |
|----------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance:    |     |      |        |
| For fixed-bias operation .....   | 0.5 | 0.25 | megohm |
| For cathode-bias operation ..... | 1   | 1    | megohm |

▪ This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

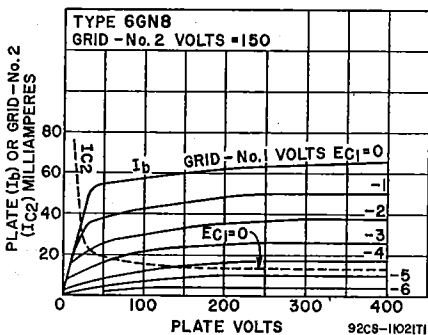


Refer to chart at end of section.

**6GQ7**

**MEDIUM-MU TRIODE—SHARP-CUTOFF PENTODE**

**6GS7**

5GS7, 7GS7



**9GF**

Miniature type used as a frequency changer in vhf television tuners. Outlines section, 6B; requires 9-contact socket. Types 5GS7 and 7GS7 are identical with type 6GS7 except for heater ratings. Heater: volts, 7.6; ampere, 0.3; maximum heater-cathode volts,  $\pm 100$  peak, 100 average.

|                         |               |               |               |        |
|-------------------------|---------------|---------------|---------------|--------|
| Heater Voltage .....    | 5GS7          | 6GS7          | 7GS7          |        |
| Heater Current .....    | 5.4           | 6.3           | 7.6           | volts  |
| Heater-Cathode Voltage: | 0.45          | 0.4           | 0.3           | ampere |
| Peak value .....        | $\pm 200$ max | $\pm 200$ max | $\pm 200$ max | volts  |
| Average value .....     | 100 max       | 100 max       | 100 max       | volts  |

**Class A<sub>1</sub> Amplifier**

|   |             |              |       |
|---|-------------|--------------|-------|
| <b>MAXIMUM RATINGS (Design-Center Values)</b> | Triode Unit | Pentode Unit |       |
| Plate Voltage .....                           | 125         | 250          | volts |
| Grid-No.2 (Screen-Grid) Voltage .....         | —           | 150          | volts |
| Plate Dissipation .....                       | 1.5         | 2            | watts |
| Grid-No.2 Input .....                         | —           | 0.5          | watt  |
| Cathode Current .....                         | 15          | 18           | mA    |

**CHARACTERISTICS**

|  |      |          |            |
|--|------|----------|------------|
| Plate Voltage .....                    | 100  | 170      | volts      |
| Grid-No.2 Voltage .....                | —    | 150      | volts      |
| Grid-No.1 (Control-Grid) Voltage ..... | —3   | —1.2     | volts      |
| Plate Current .....                    | 14   | 10       | mA         |
| Grid-No.2 Current .....                | —    | 3.3      | mA         |
| Transconductance .....                 | 5500 | 12000    | $\mu$ mhos |
| Plate Resistance .....                 | —    | 0.35 min | megohm     |
| Amplification Factor .....             | 17   | —        |            |

**MAXIMUM CIRCUIT VALUES**

|                                    |     |      |        |
|------------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance ..... | 0.5 | —    | megohm |
| Grid-No.1-Circuit Resistance:      |     |      |        |
| For fixed-bias operation .....     | —   | 0.25 | megohm |
| For cathode-bias operation .....   | —   | 0.5  | megohm |

**Pentode Unit as Frequency Changer****CHARACTERISTICS**

|                                    |       |  |             |
|------------------------------------|-------|--|-------------|
| Plate Voltage .....                | 190   |  | volts       |
| Grid-No.2 Supply Voltage .....     | 190   |  | volts       |
| Oscillator Voltage .....           | 2.3   |  | volts (rms) |
| Grid-No.2 Circuit Resistance ..... | 0.018 |  | megohm      |
| Grid-No.1 Circuit Resistance ..... | 0.1   |  | megohm      |
| Plate Current .....                | 8.5   |  | mA          |
| Grid-No.2 Current .....            | 2.7   |  | mA          |
| Grid-No.1 Current .....            | 30    |  | $\mu$ A     |
| Plate Resistance .....             | 0.6   |  | megohm      |
| Conversion Transconductance .....  | 4500  |  | $\mu$ mhos  |

**Triode Unit as Oscillator****CHARACTERISTICS**

|                                |       |  |             |
|--------------------------------|-------|--|-------------|
| Plate Supply Voltage .....     | 190   |  | volts       |
| Plate Circuit Resistance ..... | 8200  |  | ohms        |
| Grid Circuit Resistance .....  | 10000 |  | ohms        |
| Oscillator Voltage .....       | 4.5   |  | volts (rms) |
| Plate Current .....            | 12    |  | mA          |
| Transconductance .....         | 3500  |  | $\mu$ mhos  |

**6GT5**


Refer to chart at end of section.

**6GT5A**

17GT5A

**BEAM POWER TUBE**

Novar type used as horizontal-deflection amplifier in television receivers. Outlines section, 31A; requires novar 9-contact socket. For curve of average characteristics, refer to type 6GW6. Type 17GT5A is identical except for heater ratings.

**9NZ**

|  |          |          |         |
|--|----------|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 6GT5A    | 17GT5A   |         |
| Heater Current .....   | 6.3      | 16.8     | volts   |
| Heater Warm-up Time (Average) .....                          | 1.2      | 0.45     | ampere  |
| Heater-Cathode Voltage:                                      |          |          | seconds |
| Peak value .....   | ±200 max | ±200 max | volts   |
| Average value .....  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):                |          |          |         |
| Grid No.1 to Plate .....                                     |          | 0.26     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |          | 15       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |          | 6.5      | pF      |

**Class A<sub>1</sub> Amplifier****CHARACTERISTICS**

|   |                   |                    |       |
|---|-------------------|--------------------|-------|
|   | Triode Connection | Pentode Connection |       |
| Plate Voltage .....   | 150               | 60                 | 250   |
| Grid-No.2 (Screen-Grid) Voltage .....                       | 150               | 150                | 150   |
| Grid-No.1 (Control-Grid) Voltage .....                      | -22.5             | 0                  | -22.5 |
| Mu Factor, Grid No.2 to Grid No.1 .....                     | 4.4               | —                  | —     |
| Plate Resistance (Approx.) .....                            | —                 | —                  | 15000 |
| Transconductance .....                                      | —                 | —                  | 7100  |
| Plate Current .....   | —                 | 390*               | 70    |
| Grid-No.2 Current .....                                     | —                 | 32*                | 2.1   |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA ..... | —                 | —                  | -42   |

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |      |       |
|--|------|-------|
| DC Plate Supply Voltage .....            | 770  | volts |
| Peak Positive-Pulse Plate Voltage# ..... | 6500 | volts |

|   |      |       |
|---|------|-------|
| Peak Negative-Pulse Plate Voltage .....     | 1500 | volts |
| DC Grid-No.2 Voltage .....                  | 220  | volts |
| DC Grid-No.1 Voltage .....                  | -55  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Peak Cathode Current .....                  | 550  | mA    |
| Average Cathode Current .....               | 175  | mA    |
| Plate Dissipation* .....                    | 17.5 | watts |
| Grid-No.2 Input .....                       | 3.5  | watts |
| Bulb Temperature (At hottest point) .....   | 240  | °C    |

**MAXIMUM CIRCUIT VALUE**

Grid-No.1-Circuit Resistance, for grid-resistor-bias operation\* ..... 1 megohm

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* A bias resistor or other means is required to protect the tube in absence of excitation.


Refer to chart at end of section.

**6GU5**

**MEDIUM-MU TWIN TRIODE**

**6GU7**

8GU7



9LP

Miniature type used in the matrixing circuits of color and black-and-white television receivers and in phase-inverter, multivibrator, and general-purpose amplifier applications. Outlines section, 6E; requires miniature 9-contact socket. Type 8GU7 is identical with type 6GU7 except for heater ratings.

|  |           |           |         |
|--|-----------|-----------|---------|
| Heater Voltage (ac/dc) .....                   | 6GU7      | 8GU7      |         |
| Heater Current .....                           | 6.3       | 8.4       | volts   |
| Heater Warm-up Time (Average) .....            | 0.6       | 0.45      | ampere  |
| Heater-Cathode Voltage:                        |           |           | seconds |
| Peak value .....                               | ±200 max  | ±200 max  | volts   |
| Average value .....                            | 100 max   | 100 max   | volts   |
| Direct Interelectrode Capacitances (Approx.):  | Unit No.1 | Unit No.2 |         |
| Grid to Plate .....                            | 3         | 3         | pF      |
| Grid to Cathode and Heater .....               | 3.4       | 3.6       | pF      |
| Plate to Cathode and Heater .....              | 0.44      | 0.34      | pF      |
| Plate of Unit No.1 to Plate of Unit No.2 ..... | 1         |           | pF      |


**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 330 | volts |
| Grid Voltage, Positive-bias value ..... | 0   | volts |
| Plate Dissipation .....                 | 3   | watts |

**CHARACTERISTICS**

|                                  |       |       |
|----------------------------------|-------|-------|
| Plate Voltage .....              | 250   | volts |
| Grid Voltage .....               | -10.5 | volts |
| Amplification Factor .....       | 17    |       |
| Plate Resistance (Approx.) ..... | 5500  | ohms  |
| Transconductance .....           | 3100  | μmhos |

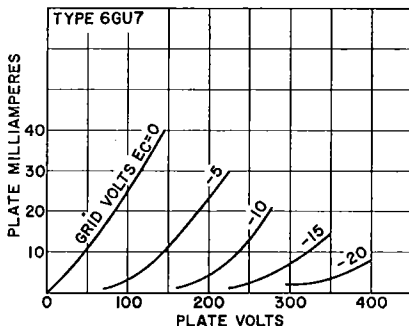

92CS-11966T1


|  |      |        |
|--|------|--------|
| Plate Current .....  | 11.5 | mA     |
| Grid Voltage (Approx.) for plate current of 50 $\mu$ A ..... | -23  | volts  |
| Plate Current for grid voltage of -14 volts .....            | 4    | mA     |
| <b>MAXIMUM CIRCUIT VALUE</b>                                 |      |        |
| Grid-Circuit Resistance, for fixed-bias operation .....      | 1    | megohm |

## 6GV5

### 17GV5

## BEAM POWER TUBE

Duodecar type used as horizontal-deflection amplifier in television receivers. Outlines section, 16A; requires duodecar 12-contact socket. Type 17GV5 is identical with type 6GV5 except for heater ratings.



|                                     |               |               |         |
|-------------------------------------|---------------|---------------|---------|
|                                     | <b>6GV5</b>   | <b>17GV5</b>  |         |
| Heater Voltage (ac/dc) .....        | 6.3           | 16.8          | volts   |
| Heater Current .....                | 1.2           | 0.45          | amperes |
| Heater Warm-up Time (Average) ..... | —             | 11            | seconds |
| Heater-Cathode Voltage:             |               |               |         |
| Peak value .....                    | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....                 | 100 max       | 100 max       | volts   |

### Class A<sub>1</sub> Amplifier

#### CHARACTERISTICS

|   | Pentode Connection |      | Triode* Connection |       |            |
|---|--------------------|------|--------------------|-------|------------|
| Plate Voltage .....   | 5000               | 60   | 250                | 150   | volts      |
| Grid-No.2 (Screen-Grid) Voltage .....                       | 150                | 150  | 150                | 150   | volts      |
| Grid-No.1 (Control-Grid) Voltage .....                      | —                  | 0    | -22.5              | -22.5 | volts      |
| Plate Resistance (Approx.) .....                            | —                  | —    | 18000              | —     | ohms       |
| Transconductance .....                                      | —                  | —    | 7300               | —     | $\mu$ mhos |
| Amplification Factor .....                                  | —                  | —    | —                  | 4.4   | —          |
| Plate Current .....   | —                  | 345* | 65                 | —     | mA         |
| Grid-No.2 Current .....                                     | —                  | 27*  | 1.8                | —     | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA ..... | -100               | —    | -42                | —     | volts      |

\* Grid No.2 tied to plate.

† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |      |              |
|---|------|--------------|
| DC Plate Supply Voltage .....               | 770  | volts        |
| Peak Positive-Pulse Plate Voltage# .....    | 6500 | volts        |
| Peak Negative-Pulse Plate Voltage .....     | 1500 | volts        |
| DC Grid-No.2 Voltage .....                  | 220  | volts        |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts        |
| DC Grid-No.1 Voltage .....                  | -65  | volts        |
| Peak Cathode Current .....                  | 560  | mA           |
| Average Cathode Current .....               | 175  | mA           |
| Plate Dissipation† .....                    | 17.5 | watts        |
| Grid-No.2 Input .....                       | 3.5  | watts        |
| Bulb Temperature (At hottest point) .....   | 220  | $^{\circ}$ C |

#### MAXIMUM CIRCUIT VALUE


|                                    |   |        |
|------------------------------------|---|--------|
| Grid-No.1-Circuit Resistance ..... | 1 | megohm |
|------------------------------------|---|--------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

† A bias resistor or other means is required to protect the tube in absence of excitation.

## 6GV8

Refer to chart at end of section.



9LY

**HIGH-MU TRIODE—  
POWER PENTODE**

**6GV8/  
ECL85**

9GV8/XCL85,  
10GV8/LCL85  
18GV8/PCL85

Miniature type used for sync-amplifier and video-output applications in television receivers. Outlines section, 6G; requires miniature 9-contact socket. Types 9GV8/XCL85, 10GV8/LCL85, and 18GV8/PCL85 are identical with type 6GV8/ECL85 except for heater ratings.

|                             | 6GV8/<br>ECL85 | 9GV8/<br>XCL85 | 10GV8/<br>LCL85 | 18GV8/<br>PCL85 |        |
|-----------------------------|----------------|----------------|-----------------|-----------------|--------|
| Heater Voltage (ac/dc)      | 6.3            | 9.5            | 11.6            | 18              | volts  |
| Heater Current              | 0.9            | 0.6            | 0.45            | 0.3             | ampere |
| Peak Heater-Cathode Voltage | ±220 max       | ±200 max       | ±200 max        | ±200 max        | volts  |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Absolute-Maximum Values)**

|  | Triode<br>Unit | Pentode<br>Unit |       |
|--|----------------|-----------------|-------|
| Plate Supply Voltage                   | 550            | 550             | volts |
| Peak Plate Voltage*                    | —              | 2000            | volts |
| DC Plate Voltage                       | 250            | 250             | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage | —              | 550             | volts |
| Grid-No.2 Voltage                      | —              | 250             | volts |
| Peak Cathode Current*                  | 200            | —               | mA    |
| Average Cathode Current                | 15             | 75              | mA    |
| Plate Dissipation                      | 0.5            | 7               | watts |
| Grid-No.2 Input                        | —              | 2               | watts |

**CHARACTERISTICS**

|                                   |      |      |      |       |       |
|-----------------------------------|------|------|------|-------|-------|
| Plate Voltage                     | 100  | 50   | 65   | 170   | volts |
| Grid-No.2 Voltage                 | —    | 170  | 210  | 170   | volts |
| Grid-No.1 Voltage                 | -0.8 | -1   | -1   | -15   | volts |
| Amplification Factor              | 50   | —    | —    | —     |       |
| Mu-Factor, Grid No.1 to Grid No.2 | —    | —    | —    | 7     |       |
| Plate Resistance (Approx.)        | 7600 | —    | —    | 25000 | ohms  |
| Transconductance                  | 6500 | —    | —    | 7500  | μmhos |
| Plate Current                     | 5    | 200* | 240* | 41    | mA    |
| Grid-No.2 Current                 | —    | 40*  | 50*  | 2.7   | mA    |

**MAXIMUM CIRCUIT VALUES**

|                               |     |     |         |
|-------------------------------|-----|-----|---------|
| Grid-No.1-Circuit Resistance: |     |     |         |
| For fixed-bias operation      | 1   | 1   | megohm  |
| For cathode-bias operation    | 3.3 | 2.2 | megohms |

\* Maximum pulse duration 5 per cent of a cycle with a maximum of 1 millisecond.

■ Maximum pulse duration 200 microseconds. If a larger flyback is required, this value may be reduced to 100 mA with a maximum pulse duration of 400 microseconds.

• This value can be measured by a method involving a recurrent waveform such that the maximum tube ratings will not be exceeded.


Refer to chart at end of section.

**6GW6**

**6GW6/  
6DQ6B**

12GW6/12DQ6B  
17GW6/17DQ6B

**BEAM POWER TUBE**



6AM

Glass octal type used as horizontal-deflection amplifier in high-efficiency deflection circuits of television receivers. Outlines section, 20A; requires octal socket. Types 12GW6/12DQ6B and 17GW6/17DQ6B are identical with type 6GW6/6DQ6B except for heater ratings.

|  | 6GW6/<br>6DQ6B | 12GW6/<br>12DQ6B | 17GW6/<br>17DQ6B |         |
|--|----------------|------------------|------------------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3            | 12.6             | 16.8             | volts   |
| Heater Current .....   | 1.2            | 0.6              | 0.45             | amperes |
| Heater Warm-up Time (Average) .....                          | —              | 11               | 11               | seconds |
| Heater-Cathode Voltage:                                      |                |                  |                  |         |
| Peak value .....   | ±200 max       | ±200 max         | ±200 max         | volts   |
| Average value .....  | 100 max        | 100 max          | 100 max          | volts   |
| Direct Interelectrode Capacitances (Approx.):                |                |                  |                  |         |
| Grid No.1 to Plate .....                                     |                |                  | 0.5              | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |                |                  | 17               | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |                |                  | 7                | pF      |

### Class A<sub>1</sub> Amplifier

| CHARACTERISTICS   | Triode Connection |      | Pentode Connection |       |       |
|---|-------------------|------|--------------------|-------|-------|
|   | 150               | 60   | 250                | 150   |       |
| Plate Voltage .....   | 150               | 60   | 250                | 150   | volts |
| Grid-No.2 Voltage .....                                     | 150               | 150  | 150                | 150   | volts |
| Grid-No.1 Voltage .....                                     | -22.5             | 0    | -22.5              | -22.5 | volts |
| Mu-Factor, Grid No.2 to Grid No.1 .....                     | 4.4               | —    | —                  | —     |       |
| Plate Resistance (Approx.) .....                            | —                 | —    | 15000              | —     | ohms  |
| Transconductance .....                                      | —                 | —    | 7100               | —     | μmhos |
| Plate Current .....   | —                 | 390* | 70                 | —     | mA    |
| Grid-No.2 Current .....                                     | —                 | 32*  | 2.1                | —     | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA ..... | —                 | —    | -42                | —     | volts |


\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |      |       |
|---|------|-------|
| DC Plate Supply Voltage .....               | 770  | volts |
| Peak Positive-Pulse Plate Voltage# .....    | 6500 | volts |
| Peak Negative-Pulse Plate Voltage .....     | 1500 | volts |
| DC Grid-No.2 (Screen-Grid) Voltage .....    | 220  | volts |
| DC Grid-No.1 (Control-Grid) Voltage .....   | -55  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Peak Cathode Current .....                  | 550  | mA    |

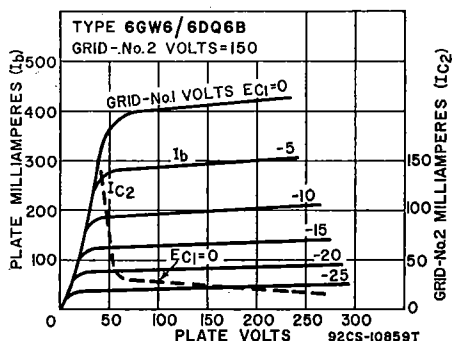


|   |      |       |
|---|------|-------|
| Average Cathode Current .....             | 175  | mA    |
| Plate Dissipation* .....                  | 17.5 | watts |
| Grid-No.2 Input .....                     | 3.5  | watts |
| Bulb Temperature (At hottest point) ..... | 240  | °C    |

#### MAXIMUM CIRCUIT VALUES

Grid-No.1-Circuit Resistance, for grid-resistor-bias operation .... 1 megohm

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

• A bias resistor or other means is required to protect the tube in absence of excitation.



**HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6GW8/  
ECL86**

Miniature type used in preamplifier and audio output stages of audio equipment and television receivers. Outlines section, 6G; requires miniature 9-contact socket. Heater: volts (ac/dc), 6.3; amperes, 0.7; maximum heater-cathode volts, 100 peak.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**

|   | Triode Unit | Pentode Unit |       |
|---|-------------|--------------|-------|
| Plate Supply Voltage                                  | 550         | 550          | volts |
| Plate Voltage   | 300         | 300          | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —           | 550          | volts |
| Grid-No.2 Voltage                                     | —           | 300          | volts |
| Grid-No.1 (Control-Grid) Voltage, Negative-bias value | 1.3         | 1.3          | volts |
| Cathode Current                                       | 4           | 55           | mA    |
| Plate Dissipation                                     | 0.5         | 9            | watts |
| Grid-No.2 Input                                       | —           | 1.5          | watts |

**CHARACTERISTICS**

|                            |      |       |       |
|----------------------------|------|-------|-------|
| Plate Voltage              | 250  | 250   | volts |
| Grid-No.2 Voltage          | —    | 250   | volts |
| Grid-No.1 Voltage          | -1.9 | -7    | volts |
| Amplification Factor       | 100  | 21*   |       |
| Plate Resistance (Approx.) | —    | 45000 | ohms  |
| Transconductance           | 1600 | 10000 | μmhos |
| Plate Current              | 1.2  | 36    | mA    |
| Grid-No.2 Current          | —    | 6     | mA    |


**MAXIMUM CIRCUIT VALUES**

|  |   |     |        |
|--|---|-----|--------|
| Grid-No.1-Circuit Resistance, for fixed-bias operation | 1 | 0.5 | megohm |
|--|---|-----|--------|

\* Grid No.2 to grid No.1.

Refer to chart at end of section.  
For replacement use type 6GY6/6GX6.

**6GX6**



**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6GX7**

Miniature type used as combined oscillator-mixer tube in vhf tuner circuits of color and black-and-white television receivers. Outlines section, 6B; requires miniature 9-contact socket.

|   |          |        |
|---|----------|--------|
| Heater Voltage (ac/dc)  | 6.3      | volts  |
| Heater Current  | 0.4      | ampere |
| Heater-Cathode Voltage:   |          |        |
| Peak value  | ±200 max | volts  |
| Average value   | 100 max  | volts  |
| Direct Interelectrode Capacitances:**                                     |          |        |
| Triode Unit:  |          |        |
| Grid to Plate   | 1.2      | pF     |
| Grid to Cathode, Heater, Pentode Cathode, Grid No.3, and Internal Shield  | 2.3      | pF     |
| Plate to Cathode, Heater, Pentode Cathode, Grid No.3, and Internal Shield | 1.9      | pF     |
| Pentode Unit:   |          |        |
| Grid No.1 to Plate  | 0.005    | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield   | 5.4      | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield       | 3.3      | pF     |
| Grid No.1 to Grid No.2  | 1.6      | pF     |

\*\* With external shield connected to cathode.

Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values)            | Triode Unit | Pentode Unit       |       |
|--|-------------|--------------------|-------|
| Plate Voltage                                      | 275         | 275                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage             | —           | 275                | volts |
| Grid-No.2 Voltage                                  | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:                  |             |                    |       |
| Positive-bias value                                | 0           | 0                  |       |
| Negative-bias value                                | 40          | 40                 | volts |
| Cathode Current                                    | 20          | 20                 | mA    |
| Plate Dissipation                                  | 1.5         | 2.2                | watts |
| Grid-No.2 Input:                                   |             |                    |       |
| For grid-No.2 voltages up to 137.5 volts           | —           | 0.45               | watts |
| For grid-No.2 voltages between 137.5 and 275 volts | —           | See curve page 300 |       |

| CHARACTERISTICS                              | Triode Unit | Triode Unit | Pentode Unit | Pentode Unit |        |
|--|-------------|-------------|--------------|--------------|--------|
| Plate Voltage                                | 100         | 125         | 120          | 125          | volts  |
| Grid-No.2 Voltage                            | —           | —           | 90           | 125          | volts  |
| Grid-No.1 Voltage                            | —           | -1          | —            | -1           | volt   |
| Grid-No.1-Circuit Resistance                 | 0.1         | —           | 0.1          | —            | megohm |
| Amplification Factor                         | 40          | —           | —            | —            |        |
| Plate Resistance                             | —           | 4700        | —            | 200000       | ohms   |
| Transconductance                             | 8700        | 8500        | 13000        | 11000        | μmhos  |
| Plate Current                                | 12.5        | 13          | 8.5          | 8            | mA     |
| Grid-No.2 Current                            | —           | —           | 2.8          | 2.5          | mA     |
| Grid-No.1 Voltage for plate current of 20 μA | -6          | —           | -2.5         | —            | volts  |

## MAXIMUM CIRCUIT VALUES


| Grid-No.1-Circuit Resistance: | Triode Unit | Pentode Unit |        |
|-------------------------------|-------------|--------------|--------|
| For fixed-bias operation      | 0.5         | 0.25         | megohm |
| For cathode-bias operation    | 1           | 0.5          | megohm |

**6GY5**

16GY5, 21GY5

## BEAM POWER TUBE

Duodecar type used as horizontal-deflection amplifier in television receivers. Outlines section, 16A; requires duodecar 12-contact socket. Types 16GY5 and 21GY5 are identical with type 6GY5 except for heater ratings.



## 12DR

|                               | 6GY5     | 16GY5    | 21GY5    |         |
|-------------------------------|----------|----------|----------|---------|
| Heater Voltage (ac/dc)        | 6.3      | 15.8     | 21       | volts   |
| Heater Current                | 1.5      | 0.6      | 0.45     | amperes |
| Heater Warm-up Time (Average) | —        | 11       | 11       | seconds |
| Heater-Cathode Voltage:       |          |          |          |         |
| Peak value                    | ±200 max | ±200 max | ±200 max | volts   |
| Average value                 | 100 max  | 100 max  | 100 max  | volts   |

Class A<sub>1</sub> Amplifier

| CHARACTERISTICS                                       | Pentode Connection |       | Triode† Connection |       |
|---|--------------------|-------|--------------------|-------|
| Plate Voltage   | 5000               | 60    | 130                | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 130                | 130   | 130                | volts |
| Grid-No.1 (Control-Grid) Voltage                      | —                  | 0     | -20                | volts |
| Amplification Factor                                  | —                  | —     | 4.7                |       |
| Plate Resistance (Approx.)                            | —                  | 11000 | —                  | ohms  |
| Transconductance                                      | —                  | 9100  | —                  | μmhos |
| Plate Current   | —                  | 410** | 50                 | mA    |
| Grid-No.2 Current                                     | —                  | 24**  | 1.75               | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 μA | -66                | —     | -33                | volts |

\*\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

† Grid No.2 tied to plate.

## Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Maximum Values) |      |       |
|---|------|-------|
| DC Plate Supply Voltage                 | 770  | volts |
| Peak Positive-Pulse Plate Voltage#      | 6500 | volts |




|   |      |       |
|---|------|-------|
| Peak Negative-Pulse Plate Voltage .....     | 1500 | volts |
| DC Grid-No.2 Voltage .....                  | 220  | volts |
| DC Grid-No.1 Voltage .....                  | -55  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Peak Cathode Current .....                  | 800  | mA    |
| Average Cathode Current .....               | 230  | mA    |
| Plate Dissipation†† .....                   | 18   | watts |
| Grid-No.2 Input .....                       | 3.5  | watts |
| Bulb Temperature (At hottest point) .....   | 220  | °C    |

**MAXIMUM CIRCUIT VALUE**

|   |   |        |
|---|---|--------|
| Grid-No.1-Circuit Resistance .....  | 1 | megohm |
| # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).      |   |        |
| †† A bias resistor or other means is required to protect the tube in absence of excitation. |   |        |

**6GY6/  
6GX6**

**SHARP-CUTOFF PENTODE**



**7EN**

Miniature type used in gated-agc-amplifier circuits and as a noise-inverter tube in color and black-and-white television receivers. Tube has two independent control grids. **Outlines section, 5C**; requires miniature 7-contact socket.

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc) .....   | 6.3      | volts   |
| Heater Current .....   | 0.45     | ampere  |
| Heater Warm-up Time (Average) .....  | 11       | seconds |
| <b>Heater-Cathode Voltage:</b>   |          |         |
| Peak value .....   | ±200 max | volts   |
| Average value .....  | 100 max  | volts   |
| <b>Direct Interelectrode Capacitances:</b>   |          |         |
| Grid No.1 to Plate .....   | 0.026    | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....        | 8        | pF      |
| Grid No.1 to Grid No.3 .....   | 0.12     | pF      |
| Grid No.3 to Plate .....   | 1.6      | pF      |
| Grid No.3 to Cathode, Heater, Plate, Grid No.1, Grid No.2, and Internal Shield ..... | 6.5      | pF      |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|   |      |        |
|---|------|--------|
| Plate Supply Voltage .....  | 150  | volts  |
| Grid-No.3 Supply Voltage .....                                      | 0    | volts  |
| Grid-No.2 Supply Voltage .....                                      | 100  | volts  |
| Grid-No.1 Supply Voltage .....                                      | 0    | volts  |
| Cathode-Bias Resistor .....   | 180  | ohms   |
| Plate Resistance (Approx.) .....                                    | 0.14 | megohm |
| Transconductance, Grid No.1 to Plate .....                          | 3700 | μmhos  |
| Transconductance, Grid No.3 to Plate .....                          | 750  | μmhos  |
| Plate Current .....   | 3.7  | mA     |
| Grid-No.2 Current .....   | 3    | mA     |
| Grid-No.3 Supply Voltage (Approx.) for plate current of 20 μA ..... | -7   | volts  |
| Grid-No.1 Supply Voltage (Approx.) for plate current of 20 μA ..... | -4.5 | volts  |

**Gated AGC Amplifier and Noise Inverter**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |                    |       |
|--|--------------------|-------|
| Plate Voltage .....                                    | 300                | volts |
| Peak Positive-Pulse Plate Voltage# .....               | 600                | volts |
| <b>Grid-No.3 (Control-Grid) Voltage:</b>               |                    |       |
| Negative-bias value .....                              | 100                | volts |
| Positive-bias value .....                              | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....           | 300                | volts |
| Grid-No.2 Voltage .....                                | See curve page 300 |       |
| <b>Grid-No.1 (Control-Grid) Voltage:</b>               |                    |       |
| Negative-bias value .....                              | 50                 | volts |
| Positive-bias value .....                              | 0                  | volts |
| Plate Dissipation .....                                | 1.7                | watts |
| <b>Grid-No.2 Input:</b>                                |                    |       |
| For grid-No.2 voltages up to 150 volts .....           | 1                  | watt  |
| For grid-No.2 voltages between 150 and 300 volts ..... | See curve page 300 |       |

### Screen-Grid (Grid-No. 2) Input Rating Chart

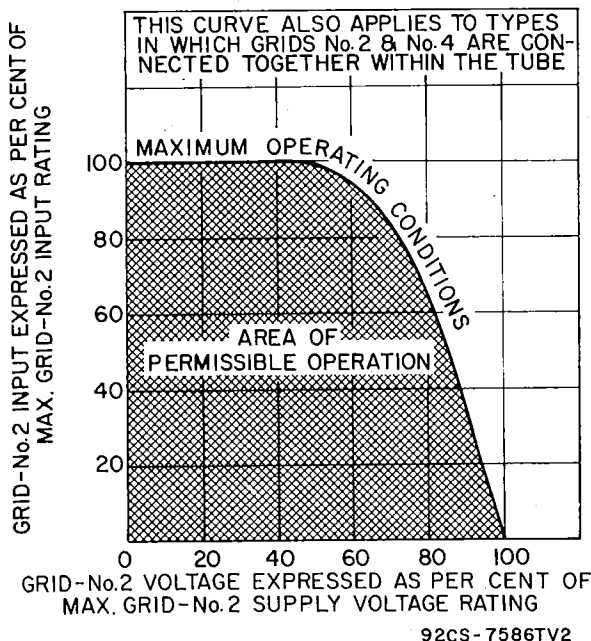


Fig. 134—Grid-No. 2 input rating curve.

For certain voltage amplifier types, as listed in the data section, the maximum permissible screen-grid (grid-No. 2) input varies with the screen-grid voltage, as shown in the chart above. (This chart cannot be assumed to apply to types other than those for which it is specified in the data section.) Full rated screen-grid input is permissible at screen-grid voltages up to 50 per cent of the maximum rated screen-grid supply voltage. From the 50-per-cent point to the full rated value of supply voltage, the screen-grid input must be decreased. The decrease in allowable screen-grid input follows a curve of the parabolic form. This rating chart is useful for applications utilizing either a fixed screen-grid voltage or a series screen-grid voltage-dropping resistor.

When a fixed voltage is used, it is necessary only to determine that the screen-grid input is within the boundary of the operating area on the chart at the selected value of screen-grid voltage to be used. When a voltage-dropping resistor is used, the minimum value of resistor that will assure tube operation within the boundary of the curve can be determined from the following relation:



$$R_{e2} \geq \frac{E_{e2} (E_{ce2} - E_{e2})}{P_{e2}}$$

where  $R_{e2}$  is the minimum value for the voltage-dropping resistor in ohms,  $E_{e2}$  is the selected screen-grid voltage in volts,  $E_{ce2}$  is the screen-grid supply voltage in volts, and  $P_{e2}$  is the screen-grid input in watts corresponding to  $E_{e2}$ .

**MAXIMUM CIRCUIT VALUES**

|                                    |      |        |
|------------------------------------|------|--------|
| Grid-No.3-Circuit Resistance ..... | 0.68 | megohm |
| Grid-No.1-Circuit Resistance:      |      |        |
| For fixed-bias operation .....     | 0.22 | megohm |
| For cathode-bias operation .....   | 0.47 | megohm |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

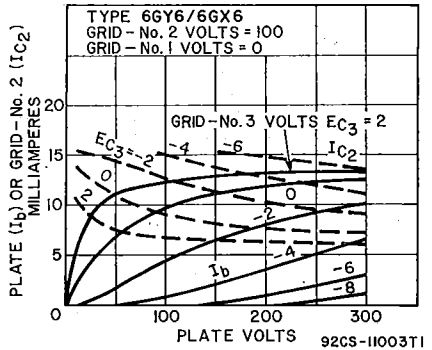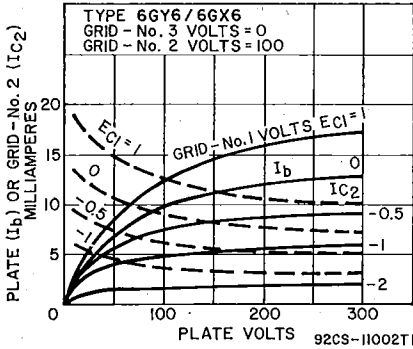

Refer to chart at end of section.

**6GY8**

Refer to chart at end of section.

**6GZ5**

Refer to chart at end of section.

**6H6**


Refer to chart at end of section.

**6H6GT**

**HIGH-MU TRIODE**

**6HA5**

2HA5, 4HA5/PC900




**7GM**

Miniature type used as rf-amplifier tube in vhf television tuners. Outlines section, 5A; requires miniature 7-contact socket. Type 6HA5 is electrically identical with type 6HM5/6HA5. Related types 2HA5 and 4HA5/PC900 are electrically identical with type 6HA5 except for heater voltages of 2.2 and 3.9 volts and heater currents of 0.6 and 0.3 ampere, respectively.

For replacement use type 6HB6/6HA6.

**6HA6**



**12BJ**

**BEAM POWER TUBE**

**6HB5**

Duodecar type used as horizontal-deflection amplifier in television receivers. Outlines section, 15B; requires duodecar 12-contact socket.

|                              |          |         |
|------------------------------|----------|---------|
| Heater Voltage (ac/dc) ..... | 6.3      | volts   |
| Heater Current .....         | 1.5      | amperes |
| Heater-Cathode Voltage:      |          |         |
| Peak value .....             | ±200 max | volts   |
| Average value .....          | 100 max  | volts   |

Class A<sub>1</sub> Amplifier

| CHARACTERISTICS                                       | Pentode Connection |                  | Triode* Connection |       |
|---|--------------------|------------------|--------------------|-------|
|   |                    |                  |                    |       |
| Plate Voltage   | 5000               | 60               | 130                | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 130                | 130              | 130                | volts |
| Grid-No.1 (Control-Grid) Voltage                      | —                  | 0                | -20                | volts |
| Amplification Factor                                  | —                  | —                | 4.7                |       |
| Plate Resistance (Approx.)                            | —                  | —                | 11000              | ohms  |
| Transconductance                                      | —                  | —                | 9100               | μmhos |
| Plate Current   | —                  | 410 <sup>a</sup> | 50                 | mA    |
| Grid-No.2 Current                                     | —                  | 24 <sup>a</sup>  | 1.75               | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | -66                | —                | -33                | volts |

\* Grid No.2 tied to plate.

<sup>a</sup> This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

## Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Maximum Values)

|                                       |      |       |
|---------------------------------------|------|-------|
| DC Plate Supply Voltage               | 770  | volts |
| Peak Positive-Pulse Plate Voltage#    | 6000 | volts |
| Peak Negative-Pulse Plate Voltage     | 1500 | volts |
| DC Grid-No.2 Voltage                  | 220  | volts |
| DC Grid-No.1 Voltage                  | -55  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage | 330  | volts |
| Peak Cathode Current                  | 800  | mA    |
| Average Cathode Current               | 230  | mA    |
| Plate Dissipation†                    | 18   | watts |
| Grid-No.2 Input                       | 3.5  | watts |
| Bulb Temperature (At hottest point)   | 220  | °C    |

## MAXIMUM CIRCUIT VALUE

Grid-No.1-Circuit Resistance ..... 1 megohm

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

† A bias resistor or other means is required to protect the tube in absence of excitation.

**6HB6**  
**6HB6/6HA6**


Refer to chart at end of section.

**6HB7**

5HB7

**MEDIUM-MU TRIODE—**  
**SHARP-CUTOFF PENTODE**

Miniature type used as combined oscillator and mixer tube in color and black-and-white television receivers utilizing an intermediate frequency in the order of 40 MHz. Outlines section, 6B; requires miniature 9-contact socket. Type 5HB7 is identical with type 6HB7 except for heater ratings.



9QA

|   | 5HB7     | 6HB7      |         |
|---|----------|-----------|---------|
| Heater Voltage (ac/dc)  | 4.7      | 6.3       | volts   |
| Heater Current  | 0.6      | 0.45      | ampere  |
| Heater Warm-up Time (Average)   | 11       | 11        | seconds |
| Heater-Cathode Voltage:   |          |           |         |
| Peak value  | ±200 max | ±200 max  | volts   |
| Average value   | 100 max  | 100 max   | volts   |
| Direct Interelectrode Capacitances: <sup>a</sup>                        |          |           |         |
| Triode Unit:  |          |           |         |
| Grid to Plate   |          | 1.9       | pF      |
| Grid to Cathode, Heater, Pentode Grid No.3, and Internal Shield         |          | 3         | pF      |
| Plate to Cathode, Heater, Pentode Grid No.3, and Internal Shield        |          | 1.9       | pF      |
| Pentode Unit:   |          |           |         |
| Grid No.1 to Plate  |          | 0.010 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield |          | 5         | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     |          | 3.4       | pF      |
| Heater to Cathode <sup>b</sup>  |          | 3.8       | pF      |

<sup>a</sup> With external shield connected to cathode except as noted.

<sup>b</sup> With external shield connected to ground.

Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Maximum Values)

|  |     |                    |       |
|--|-----|--------------------|-------|
| Plate Voltage                                    | 330 | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage           | —   | 330                | volts |
| Grid-No.2 Voltage                                | —   | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:                |     |                    |       |
| Positive-bias value                              | 0   | 0                  | volts |
| Plate Dissipation                                | 2.5 | 3.1                | watts |
| Grid-No.2 Input:                                 |     |                    |       |
| For grid-No.2 voltages up to 165 volts           | —   | 0.55               | watt  |
| For grid-No.2 voltages between 165 and 330 volts | —   | See curve page 300 |       |

Triode Unit Pentode Unit

|  |     |                    |       |
|--|-----|--------------------|-------|
| Plate Voltage                                    | 330 | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage           | —   | 330                | volts |
| Grid-No.2 Voltage                                | —   | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:                |     |                    |       |
| Positive-bias value                              | 0   | 0                  | volts |
| Plate Dissipation                                | 2.5 | 3.1                | watts |
| Grid-No.2 Input:                                 |     |                    |       |
| For grid-No.2 voltages up to 165 volts           | —   | 0.55               | watt  |
| For grid-No.2 voltages between 165 and 330 volts | —   | See curve page 300 |       |

CHARACTERISTICS



|  |       |      |        |
|--|-------|------|--------|
| Plate Supply Voltage                                   | 150   | 125  | volts  |
| Grid-No.2 Supply Voltage                               | —     | 125  | volts  |
| Grid-No.1 Supply Voltage                               | 0     | -1   | volts  |
| Cathode-Bias Resistor                                  | 56    | —    | ohms   |
| Amplification Factor                                   | 40    | —    |        |
| Plate Resistance (Approx.)                             | 0.005 | 0.2  | megohm |
| Transconductance                                       | 8500  | 6400 | μmhos  |
| Plate Current  | 18    | 12   | mA     |
| Grid-No.2 Current                                      | —     | 4    | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | -12   | -9   | volts  |

|  |       |      |        |
|--|-------|------|--------|
| Plate Supply Voltage                                   | 150   | 125  | volts  |
| Grid-No.2 Supply Voltage                               | —     | 125  | volts  |
| Grid-No.1 Supply Voltage                               | 0     | -1   | volts  |
| Cathode-Bias Resistor                                  | 56    | —    | ohms   |
| Amplification Factor                                   | 40    | —    |        |
| Plate Resistance (Approx.)                             | 0.005 | 0.2  | megohm |
| Transconductance                                       | 8500  | 6400 | μmhos  |
| Plate Current  | 18    | 12   | mA     |
| Grid-No.2 Current                                      | —     | 4    | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | -12   | -9   | volts  |

MAXIMUM CIRCUIT VALUES

|                               |     |      |        |
|-------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance: |     |      |        |
| For fixed-bias operation      | 0.5 | 0.25 | megohm |
| For cathode-bias operation    | 1   | 0.5  | megohm |

|                               |     |      |        |
|-------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance: |     |      |        |
| For fixed-bias operation      | 0.5 | 0.25 | megohm |
| For cathode-bias operation    | 1   | 0.5  | megohm |

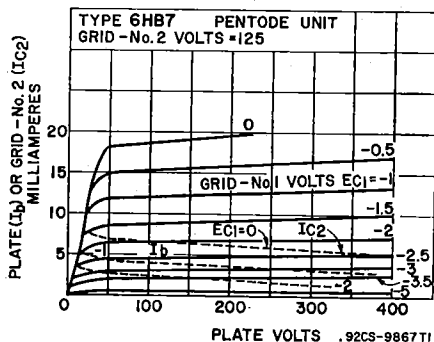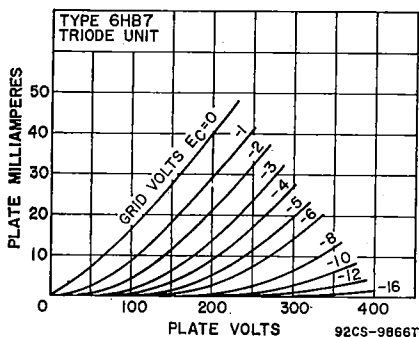


Refer to chart at end of section.

6HD7

Refer to chart at end of section.  
For replacement use type 6JB5/6HE5.

6HE5



BEAM POWER TUBE

6HF5

Duodecar type used as horizontal-deflection amplifier in color and black-and-white television receivers. Outlines section, 16B; requires duodecar 12-contact socket. Heater: volts (ac/dc), 6.3; amperes, 2.25; maximum heater-cathode volts, ±200 peak, 100 average.

Class A<sub>1</sub> Amplifier

| CHARACTERISTICS                                       | Pentode Connection |      |       | Triode* Connection |       |
|---|--------------------|------|-------|--------------------|-------|
|   |                    |      |       |                    |       |
| Plate Voltage   | 5000               | 70   | 175   | 125                | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 125                | 125  | 125   | 125                | volts |
| Grid-No.1 (Control-Grid) Voltage                      | —                  | 0    | -25   | -25                | volts |
| Amplification Factor                                  | —                  | —    | —     | 3                  |       |
| Plate Resistance (Approx.)                            | —                  | —    | 5600  | —                  | ohms  |
| Transconductance                                      | —                  | —    | 11300 | —                  | μmhos |
| Plate Current   | —                  | 570* | 125   | —                  | mA    |
| Grid-No.2 Current                                     | —                  | 34*  | 4.5   | —                  | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | -140               | —    | -54   | —                  | volts |

\* Grid No.2 tied to plate.

† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

## Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Maximum Values)

|   |                   |       |
|---|-------------------|-------|
| DC Plate Supply Voltage                               | 900               | volts |
| Peak Positive-Pulse Plate Voltage# (Absolute Maximum) | 7500 <sup>A</sup> | volts |
| Peak Negative-Pulse Plate Voltage                     | 1100              | volts |
| DC Grid-No.2 Voltage                                  | 190               | volts |
| Peak Negative-Pulse Grid-No.1 Voltage                 | 250               | volts |
| Peak Cathode Current                                  | 1100              | mA    |
| Average Cathode Current                               | 315               | mA    |
| Plate Dissipation†                                    | 28                | watts |
| Grid-No.2 Input                                       | 5.5               | watts |
| Bulb Temperature (At hottest point)                   | 225               | °C    |

## MAXIMUM CIRCUIT VALUE

Grid-No.1-Circuit Resistance ..... 1 megohm

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

<sup>A</sup> Under no circumstances should this absolute value be exceeded.


† A bias resistor or other means is required to protect the tube in absence of excitation.

## 6HF8

10HF8

HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receiver applications. The triode unit is used in high-gain, sound-if stages and in sync-separator, sync-clipper, and phase-inverter circuits; the pentode unit is used as a video-output amplifier. Outlines section, 6E; requires miniature 9-contact socket. For curves of average characteristics, refer to type 6AW8A for the triode unit and to type 6EB8 for the pentode unit. Type 10HF8 is identical with type 6HF8 except for heater ratings.



9DX

|   | 6HF8     | 10HF8     |         |
|---|----------|-----------|---------|
| Heater Voltage (ac/dc)  | 6.3      | 10.5      | volts   |
| Heater Current  | 0.75     | 0.45      | ampere  |
| Heater Warm-up Time (Average)   | —        | 11        | seconds |
| Heater-Cathode Voltage:   |          |           |         |
| Peak value  | ±200 max | ±200 max  | volts   |
| Average value   | 100 max  | 100 max   | volts   |
| Direct Interelectrode Capacitances:                                       |          |           |         |
| Triode Unit:  |          |           |         |
| Grid to Plate   |          | 3.5       | pF      |
| Grid to Cathode, Heater, Pentode Cathode, Grid No.3, and Internal Shield  |          | 2.8       | pF      |
| Plate to Cathode, Heater, Pentode Cathode, Grid No.3, and Internal Shield |          | 2.6       | pF      |
| Pentode Unit:   |          |           |         |
| Grid No.1 to Plate  |          | 0.1 max   | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield   |          | 10        | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield       |          | 4.2       | pF      |
| Triode Grid to Pentode Plate  |          | 0.015 max | pF      |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage   | 330         | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —           | 330                | volts |
| Grid-No.2 Voltage                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0                  | volts |
| Plate Dissipation                                     | 1           | 6                  | watts |
| Grid-No.2 Input:                                      |             |                    |       |
| For grid-No.2 voltages up to 165 volts                | —           | 1.1                | watts |
| For grid-No.2 voltages between 165 and 330 volts      | —           | See curve page 300 |       |

**CHARACTERISTICS**

|  | Triode Unit | Pentode Unit |       |
|--|-------------|--------------|-------|
| Plate Supply Voltage   | 200         | 45           | 200   |
| Grid-No.2 Supply Voltage                                     | —           | 125          | 125   |
| Grid-No.1 Voltage  | -2          | 0            | —     |
| Cathode-Bias Resistor  | —           | —            | 68    |
| Amplification Factor   | 70          | —            | —     |
| Plate Resistance (Approx.)                                   | 17500       | —            | 75000 |
| Transconductance   | 4000        | —            | 12500 |
| Plate Current  | 4           | 40*          | 25    |
| Grid-No.2 Current  | —           | 15*          | 7     |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A | —           | —            | -9    |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A  | -6          | —            | —     |

**MAXIMUM CIRCUIT VALUES**

| Grid-No.1-Circuit Resistance: | Triode Unit | Pentode Unit |        |
|-------------------------------|-------------|--------------|--------|
| For fixed-bias operation      | 0.5         | 0.25         | megohm |
| For cathode-bias operation    | 1           | 1            | megohm |


\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

Refer to chart at end of section.

**6HG5**

Refer to chart at end of section.

**6HG8**



**9MP**

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6HG8/  
ECF86**

5HG8/LCF86  
7HG8/PCF86

Miniature type with frame-grid pentode unit used as combined oscillator and mixer tubes in vhf color and black-and-white television receivers. Outlines section, 6B; requires miniature 9-contact socket. Types 5HG8/LCF86 and 7HG8/PCF86 are identical with type 6HG8/ECF86 except for heater ratings.

|                               | 5HG8/<br>LCF86 | 6HG8/<br>ECF86 | 7HG8/<br>PCF86 |         |
|-------------------------------|----------------|----------------|----------------|---------|
| Heater Voltage (ac/dc)        | 5.3            | 6.3            | 7.2            | volts   |
| Heater Current                | 0.45           | 0.34           | 0.3            | ampere  |
| Heater Warm-up Time (Average) | 11             | —              | —              | seconds |
| Peak Heater-Cathode Voltage   | $\pm 100$ max  | $\pm 100$ max  | $\pm 100$ max  | volts   |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                 | Triode Unit | Pentode Unit |       |
|---------------------------------|-------------|--------------|-------|
| Plate Voltage                   | 125         | 250          | volts |
| Grid-No.2 (Screen-Grid) Voltage | —           | 150          | volts |
| Cathode Current                 | 15          | 18           | mA    |
| Plate Dissipation               | 1.5         | 2            | watts |
| Grid-No.2 Input                 | —           | 0.5          | watt  |

**CHARACTERISTICS**

|                                  | Triode Unit | Pentode Unit |       |
|----------------------------------|-------------|--------------|-------|
| Plate Voltage                    | 100         | 170          | volts |
| Grid-No.2 Voltage                | —           | 150          | volts |
| Grid-No.1 (Control-Grid) Voltage | -3          | -1.2         | volts |
| Amplification Factor             | 17          | —            |       |

|   |      |       |            |
|---|------|-------|------------|
| Mu-Factor, Grid No.2 to Grid No.1 ..... | —    | 70    |            |
| Plate Resistance (Approx.) .....        | —    | 0.35  | megohm     |
| Transconductance .....                  | 5500 | 12000 | $\mu$ mhos |
| Plate Current .....                     | 14   | 10    | mA         |
| Grid-No.2 Current .....                 | —    | 3.3   | mA         |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |      |        |
|----------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance:    |     |      |        |
| For fixed-bias operation .....   | —   | 0.25 | megohm |
| For cathode-bias operation ..... | 0.5 | 0.5  | megohm |


**6HJ5** Refer to chart at end of section.

**6HJ8** Refer to chart at end of section.

**6HK5** Refer to chart at end of section.

**6HL8****MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used in color and black-and-white television receiver applications. The triode unit is used as a sync-separator or voltage-amplifier tube, and the pentode unit is used as a video if-amplifier, agc-amplifier, or reactance tube. Outlines section, 6B; requires miniature 9-contact socket. Heater: volts (ac/dc), 6.3; amperes, 0.6; warm-up time (average), 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|   |     |                    |       |
|---|-----|--------------------|-------|
| Plate Voltage .....   | 330 | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —   | 330                | volts |
| Grid-No.2 Voltage .....                                     | 0   | 0                  | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 2.5 | 2.5                | watts |
| Plate Dissipation .....                                     | —   | 0.55               | watt  |
| Grid-No.2 Input:  |     |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | —   | See curve page 300 |       |
| For grid-No.2 voltages between 165 and 330 volts .....      | —   | See curve page 300 |       |

**Triode Unit Pentode Unit**

|     |                    |       |
|-----|--------------------|-------|
| 330 | 330                | volts |
| —   | 330                | volts |
| 0   | 0                  | volts |
| 2.5 | 2.5                | watts |
| —   | 0.55               | watt  |
| —   | See curve page 300 |       |

**CHARACTERISTICS**

|   |      |        |            |
|---|------|--------|------------|
| Plate Voltage .....   | 125  | 125    | volts      |
| Grid-No.2 Voltage .....   | —    | 125    | volts      |
| Grid-No.1 Voltage .....   | -1   | -1     | volt       |
| Amplification Factor .....  | 40   | —      |            |
| Plate Resistance (Approx.) .....                                  | 5000 | 150000 | ohms       |
| Transconductance .....  | 7000 | 10000  | $\mu$ mhos |
| Plate Current .....   | 12.5 | 12     | mA         |
| Grid-No.2 Current .....   | —    | 4.5    | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A ..... | —    | -7     | volts      |

**MAXIMUM CIRCUIT VALUE**


|                                    |   |   |        |
|------------------------------------|---|---|--------|
| Grid-No.1-Circuit Resistance ..... | 1 | — | megohm |
|------------------------------------|---|---|--------|

**6HM5/  
6HA5**

3HM5/3HA5

**HIGH-MU TRIODE**

Miniature type used as rf-amplifier tube in vhf color and black-and-white television tuners. Outlines section, 5C; requires miniature 7-contact socket. Type 3HM5/3HA5 is identical with type 6HM5/6HA5 except for heater ratings.





|  | 3HM5/3HA5 | 6HM5/6HA5 |        |
|--|-----------|-----------|--------|
| Heater Voltage (ac/dc)   | 2.7       | 6.3       | volts  |
| Heater Current   | 0.45      | 0.18      | ampere |
| Peak Heater-Cathode Voltage                                    | ±110 max  | ±110 max  | volts  |
| Direct Interelectrode Capacitances:                            |           |           |        |
| Grid to Plate  |           | 0.36      | pF     |
| Grid to Cathode, Heater, Internal Shield, and External Shield  |           | 4.3       | pF     |
| Plate to Cathode, Heater, Internal Shield, and External Shield |           | 0.080     | pF     |
| Cathode to Plate   |           | 2.9       | pF     |
| Cathode to Heater, Grid, Internal Shield, and External Shield  |           | 3.1       | pF     |
| Heater to Cathode  |           | 2.3       | pF     |
| Heater to Grid   |           | 0.070 max | pF     |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**


|                         |     |       |
|-------------------------|-----|-------|
| DC Plate Voltage        | 220 | volts |
| DC Plate Supply Voltage | 600 | volts |
| Grid Voltage            | -60 | volts |
| Cathode Current         | 22  | mA    |
| Plate Dissipation       | 2.6 | watts |

**CHARACTERISTICS AND TYPICAL OPERATION**

|   | Fixed Bias |      | Cathode Bias |       |       |
|---|------------|------|--------------|-------|-------|
| DC Plate Supply Voltage                             | 135        | 135  | 135          | 135   | volts |
| Plate-Load Resistor                                 | —          | —    | 1000         | 5600  | ohms  |
| Internal-Shield Voltage                             | 0          | 0    | 0            | 0     | volts |
| DC Grid Voltage                                     | -1         | -2.7 | —            | —     | volts |
| Cathode-Bias Resistor                               | —          | —    | 0            | 87    | ohms  |
| Amplification Factor                                | 72         | —    | 80           | 72    |       |
| Transconductance                                    | 14500      | 1500 | 20000        | 14500 | μmhos |
| Plate Current                                       | 11.5       | —    | 19           | 11.5  | mA    |
| DC Grid Current                                     | —          | —    | 10           | —     | μA    |
| Grid-No.1 Voltage for one-per-cent transconductance | —          | —    | -5.3         | -8.1  | volts |

Refer to chart at end of section.

**6HM6**



**7GM**

**HIGH-MU TRIODE**

**6HQ5**

2HQ5, 3HQ5, 4HQ5

Miniature type used as grounded-cathode rf-amplifier tube in vhf tuners of television receivers. Outlines section, 5C; requires miniature 7-contact socket. Types 2HQ5, 3HQ5, and 4HQ5 are identical with type 6HQ5 except for heater ratings.

|  | 2HQ5     | 3HQ5     | 4HQ5     | 6HQ5     |         |
|--|----------|----------|----------|----------|---------|
| Heater Voltage (ac/dc)                         | 2.4      | 3        | 4.2      | 6.3      | volts   |
| Heater Current                                 | 0.6      | 0.45     | 0.3      | 0.2      | ampere  |
| Heater Warm-up Time (Average)                  | 11       | 11       | 11       | —        | seconds |
| Peak Heater-Cathode Voltage                    | ±100 max | ±100 max | ±100 max | ±100 max | volts   |
| Direct Interelectrode Capacitances (Approx.):* |          |          |          |          |         |
| Grid to Plate                                  |          |          |          | 0.52     | pF      |
| Grid to Cathode, Heater, and Internal Shield   |          |          |          | 5        | pF      |
| Plate to Cathode, Heater, and Internal Shield  |          |          |          | 3.5      | pF      |
| Heater to Cathode                              |          |          |          | 2.5      | pF      |

\* With external shield connected to cathode.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                   |     |       |
|-----------------------------------|-----|-------|
| Plate Voltage                     | 200 | volts |
| Grid Voltage, Negative-bias Value | 50  | volts |
| Cathode Current                   | 22  | mA    |
| Plate Dissipation                 | 2.5 | watts |

**CHARACTERISTICS**

|  |       |            |
|--|-------|------------|
| Plate Voltage .....  | 135   | volts      |
| Grid Voltage .....   | -1    | volt       |
| Amplification Factor .....   | 78    |            |
| Plate Resistance .....   | 5400  | ohms       |
| Transconductance .....   | 16000 | $\mu$ mhos |
| Plate Current .....  | 11.5  | mA         |
| Input Resistance** .....   | 275   | ohms       |
| Input Capacitance** .....  | 11.2  | pF         |
| Noise Figure# .....  | 4.7   | dB         |
| Grid Voltage (Approx.) for transconductance of 150 $\mu$ mhos .....  | -4.2  | volts      |
| Grid Voltage (Approx.) for transconductance of 1500 $\mu$ mhos ..... | -2.5  | volts      |

**MAXIMUM CIRCUIT VALUE**

Grid-Circuit Resistance, for cathode-bias operation ..... 1 megohm

\*\* Measured at 200 MHz with heater volts = 6.3 volts and plate effectively grounded for rf voltages.

# For a neutralized triode amplifier at a frequency of 200 MHz with signal source impedance adjusted for minimum noise output.

**6HR5**


Refer to chart at end of section.

**6HR6**

Refer to chart at end of section.

**6HS5****BEAM TRIODE**

Duodecar type used as a pulse-type regulator in the high-voltage power supply of color television receivers. Outlines section, 15F; requires duodecar 12-contact socket. Heater: volts (ac/dc), 6.3; amperes, 1.5.

**12GY****Class A<sub>1</sub> Amplifier****CHARACTERISTICS**

|  |                         |            |
|--|-------------------------|------------|
| Pulse Plate Voltage* .....                             | 3500                    | volts      |
| Grid No.2 (Beam Plate) .....                           | Connected to cathode at | socket     |
| Grid-Voltage, Negative-bias value .....                | 4.4                     | volts      |
| Peak Plate Current .....                               | 300                     | mA         |
| Amplification Factor .....                             | 300                     |            |
| Transconductance .....                                 | 65000                   | $\mu$ mhos |
| Plate Resistance (Approx.) .....                       | 4600                    | ohms       |
| Grid Voltage (Approx.) for plate current of 1 mA ..... | -13                     | volts      |

\* Duty cycle of the pulse must be less than 2.5%.

**High-Voltage Regulator Service**

For operation in a 525-line, 30-frame system


**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |              |
|---|------|-------|--------------|
| Peak Plate Voltage# .....                 | 5500 | volts |              |
| Plate Dissipation .....                   | 30   | watts |              |
| Peak Plate Current .....                  | 325  | mA    |              |
| Heater-Cathode Voltage:                   |      |       |              |
| Peak value .....                          | +200 | -450  | volts        |
| Average value .....                       |      | 100   | volts        |
| Bulb Temperature (At hottest point) ..... |      | 220   | $^{\circ}$ C |

**MAXIMUM CIRCUIT VALUE**

Grid-Circuit Resistance<sup>A</sup> ..... 0.1 megohm

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).  
<sup>A</sup> Larger values of grid-circuit resistance may be used if provisions are made to protect the tube.



SHARP-CUTOFF PENTODE

6HS6

Miniature type used as if-amplifier and limiter tube in FM receivers. Outlines section, 5C; requires miniature 7-contact socket.

|   |           |         |
|---|-----------|---------|
| Heater Voltage (ac/dc)  | 6.3       | volts   |
| Heater Current  | 0.45      | ampere  |
| Heater Warm-up Time (Average)   | 11        | seconds |
| Heater-Cathode Voltage:   |           |         |
| Peak value  |           |         |
| Average value   | ±200 max  | volts   |
| Direct Interelectrode Capacitances:                                     |           |         |
| Grid No.1 to Plate  | 100 max   | volts   |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 0.006 max | volts   |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 8.8       | pF      |
|   | 5.2       | pF      |

Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Supply Voltage                                | 300                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive Value | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage              | 300                | volts |
| Grid-No.2 Voltage                                   | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:                   |                    |       |
| Negative-bias value                                 | 50                 | volts |
| Positive-bias value                                 | 0                  | volts |
| Plate Dissipation                                   | 3                  | volts |
| Grid-No.2 Input:                                    |                    |       |
| For grid-No.2 voltages up to 150 volts              | 1                  | watt  |
| For grid-No.2 voltages between 150 and 300 volts    | See curve page 300 |       |


CHARACTERISTICS

|  |                      |           |        |
|--|----------------------|-----------|--------|
| Plate Supply Voltage                                   | 75                   | 150       | volts  |
| Grid No.3  | Connected to cathode | at socket |        |
| Grid-No.2 Supply Voltage                               | 75                   | 75        | volts  |
| Grid-No.1 Supply Voltage                               | 0                    | 0         | volts  |
| Cathode-Bias Resistor                                  | 68                   | 68        | ohms   |
| Amplification Factor*                                  | 50                   | —         |        |
| Plate Resistance (Approx.)                             | —                    | 0.5       | megohm |
| Transconductance                                       | —                    | 9500      | μmhos  |
| Plate Current  | —                    | 8.8       | mA     |
| Grid-No.2 Current                                      | —                    | 2.8       | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA | —                    | -4        | volts  |

MAXIMUM CIRCUIT VALUES

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.5 | megohm |
| For cathode-bias operation    | 1   | megohm |

\* Grid No.2 connected to plate.

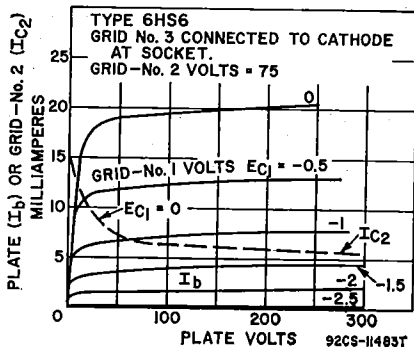


# 6HS8

4HS8

## SHARP-CUTOFF TWIN PENTODE

Miniature type used in agc amplifier, sync, and noise-limiting circuits of color and black-and-white television receivers. One pentode unit is used as combined sync separator and sync clipper; second pentode unit is used as agc amplifier. Outlines section, 6E; requires miniature 9-contact socket. Type 4HS8 is identical with type 6HS8 except for heater ratings.



|  | 4HS8     | 6HS8      | volts<br>ampere<br>seconds |
|--|----------|-----------|----------------------------|
| Heater Voltage (ac/dc)                         | 4.2      | 6.3       |                            |
| Heater Current                                 | 0.45     | 0.3       |                            |
| Heater Warm-up Time (Average)                  | 11       | —         |                            |
| <b>Heater-Cathode Voltage:</b>                 |          |           |                            |
| Peak value                                     | ±200 max | ±200 max  | volts                      |
| Average value                                  | 100 max  | 100 max   | volts                      |
| <b>Direct Interelectrode Capacitances:</b>     |          |           |                            |
| Grid No.3 to Plate (Each Unit)                 |          | 2         | pF                         |
| Grid No.1 to All Other Electrodes              |          | 6         | pF                         |
| Grid No.3 (Each Unit) to All Other Electrodes  |          | 3.6       | pF                         |
| Plate (Each Unit) to All Other Electrodes      |          | 3         | pF                         |
| Grid No.3 (Unit No.1) to Grid No.3 (Unit No.2) |          | 0.015 max | pF                         |

### Class A<sub>1</sub> Amplifier



#### MAXIMUM RATINGS (Design-Maximum Values)

|   |      |       |
|---|------|-------|
| Plate Voltage (Each Unit)                             | 300  | volts |
| Grid-No.3 (Suppressor-Grid) Voltage (Each Unit):      |      |       |
| Peak positive value                                   | 50   | volts |
| DC negative value                                     | 50   | volts |
| DC positive value                                     | 3    | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 150  | volts |
| Grid-No.1 (Control-Grid) Voltage, Negative-bias value | 50   | volts |
| Cathode Current                                       | 12   | mA    |
| Plate Dissipation (Each Unit)                         | 1.1  | watts |
| Grid-No.2 Input                                       | 0.75 | watt  |

#### CHARACTERISTICS

#### With One Unit Operating

|   |      |      |       |
|---|------|------|-------|
| Plate Voltage   | 100  | 100  | volts |
| Grid-No.3 Voltage                                       | 0    | 0    | volts |
| Grid-No.2 Voltage                                       | 67.5 | 67.5 | volts |
| Grid-No.1 Voltage                                       | 0    | —    | volts |
| Transconductance, Grid No.3 to Plate                    | —    | 450  | μmhos |
| Transconductance, Grid No.1 to Plate                    | 1100 | —    | μmhos |
| Plate Current   | —    | 2    | mA    |
| Grid-No.3 Voltage (Approx.) for plate current of 100 μA | —    | -3.5 | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | —    | -2.3 | volts |

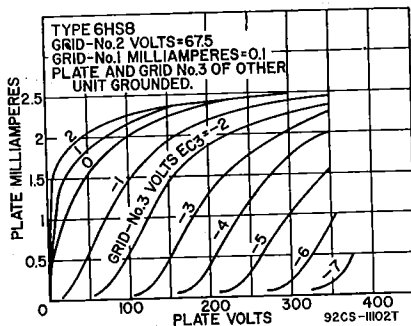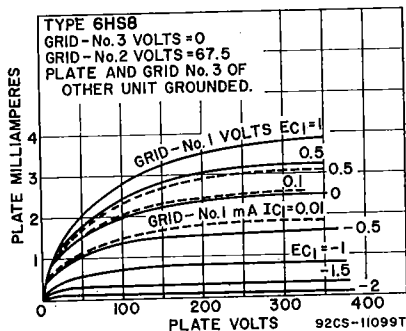

With Both Units Operating

|                                     |      |      |       |
|-------------------------------------|------|------|-------|
| Plate Voltage (Each Unit) .....     | 100  | 100  | volts |
| Grid-No.3 Voltage (Each Unit) ..... | -10  | 0    | volts |
| Grid-No.2 Voltage .....             | 67.5 | 67.5 | volts |
| Grid-No.1 Voltage .....             | "    | "    | volts |
| Plate Current (Each Unit) .....     | —    | 2    | mA    |
| Grid-No.2 Current .....             | 7    | 4.4  | mA    |
| Cathode Current .....               | 7.1  | 8.5  | mA    |

**MAXIMUM CIRCUIT VALUES**

|  |     |        |
|--|-----|--------|
| Grid-No.3-Circuit Resistance (Each Unit) ..... | 0.5 | megohm |
| Grid-No.1-Circuit Resistance .....             | 0.5 | megohm |

- With plate and grid No.3 of other unit connected to ground.
- Adjusted to give grid-No.1 current of 0.1 milliamperes.

Refer to chart at end of section.


**6HU6/EM87**

Refer to chart at end of section.

**6HU8/ELL80**

Refer to chart at end of section.

**6HV5**



12GY

**BEAM TRIODE**

**6HV5A**

Duodecar type used as a pulse-type regulator in the high-voltage power supply of color television receivers. Outlines section, 15F; requires duodecar 12-contact socket. Heater: volts (ac/dc), 6.3; amperes, 1.8.

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|  |                                |       |
|--|--------------------------------|-------|
| Pulse Plate Voltage*                                   | 3500                           | volts |
| Grid No.2 (Beam Plate) .....                           | Connected to cathode at socket |       |
| Grid-Voltage, Negative-bias value .....                | 4.4                            | volts |
| Peak Plate Current .....                               | 300                            | mA    |
| Amplification Factor .....                             | 300                            |       |
| Transconductance .....                                 | 65000                          | μmhos |
| Plate Resistance (Approx.) .....                       | 4600                           | ohms  |
| Grid Voltage (Approx.) for plate current of 1 mA ..... | -13                            | volts |

\* Duty cycle of the pulse must be less than 2.5%.

**High-Voltage Regulator Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |       |
|---|------|-------|-------|
| Peak Plate Voltage# .....                 | 5500 | volts |       |
| Plate Dissipation .....                   | 35   | watts |       |
| Peak Plate Current .....                  | 325  | mA    |       |
| Heater-Cathode Voltage:                   |      |       |       |
| Peak value .....                          | +200 | -450  | volts |
| Average value .....                       | 100  | volts |       |
| Bulb Temperature (At hottest point) ..... | 240  | °C    |       |

**MAXIMUM CIRCUIT VALUE**

|                                |     |        |
|--------------------------------|-----|--------|
| Grid-Circuit Resistance▲ ..... | 0.1 | megohm |
|--------------------------------|-----|--------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).  
 ▲ Larger values of grid-circuit resistance may be used if provisions are made to protect the tube.

Refer to chart at end of section.

For replacement use type 6JH5/6JD5/6HZ5.


**6HZ5/6JD5**

**6HZ6**

5HZ6

**SHARP-CUTOFF PENTODE**

Miniature type used as sound-detector tube in FM and color and black-and-white television receivers. Tube has two independent control grids. Outlines section, 5C; requires miniature 7-contact socket. Type 5HZ6 is identical with type 6HZ6 except for heater ratings.





7EN

|  | 5HZ6     | 6HZ6     |         |
|--|----------|----------|---------|
| Heater Voltage (ac/dc)   | 4.75     | 6.3      | volts   |
| Heater Current   | 0.6      | 0.45     | ampere  |
| Heater Warm-up Time (Average)  | 11       | 11       | seconds |
| Heater-Cathode Voltage:  |          |          |         |
| Peak value   | ±200 max | ±200 max | volts   |
| Average value  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):                                  |          |          |         |
| Grid No.1 to Plate   |          | 0.023    | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield        |          | 8.2      | pF      |
| Grid No.1 to Grid No.3   |          | 0.09     | pF      |
| Grid No.3 to Plate   |          | 1.6      | pF      |
| Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2, Plate, and Internal Shield |          | 7.2      | pF      |

**Class A<sub>1</sub> Amplifier****CHARACTERISTICS**

|   |      |        |
|---|------|--------|
| Plate Supply Voltage  | 150  | volts  |
| Grid-No.3 Supply Voltage                                      | 0    | volts  |
| Grid-No.2 Supply Voltage                                      | 100  | volts  |
| Grid-No.1 Supply Voltage                                      | 0    | volts  |
| Cathode-Bias Resistor   | 180  | ohms   |
| Plate Resistance (Approx.)                                    | 0.11 | megohm |
| Transconductance, Grid No.1 to Plate                          | 3400 | μmhos  |
| Transconductance, Grid No.3 to Plate                          | 600  | μmhos  |
| Plate Current   | 3.2  | mA     |
| Grid-No.2 Current   | 3.2  | mA     |
| Grid-No.3 Supply Voltage (Approx.) for plate current of 20 μA | -7   | volts  |
| Grid-No.1 Supply Voltage (Approx.) for plate current of 20 μA | -4.5 | volts  |

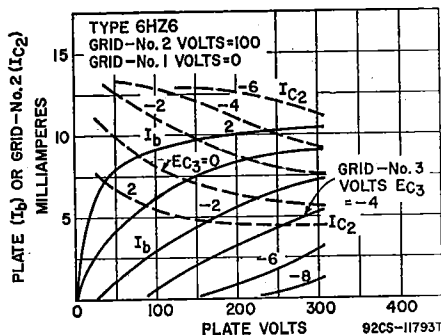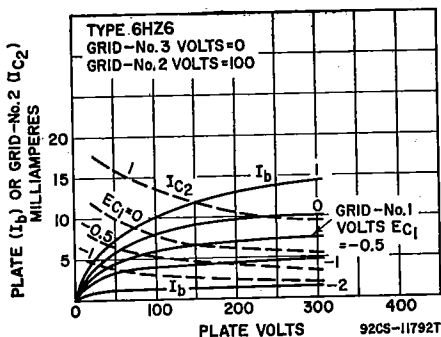**FM Sound Detector****MAXIMUM RATINGS (Design-Maximum Values)**

|  |                    |       |
|--|--------------------|-------|
| Plate Voltage                          | 300                | volts |
| Grid-No.3 (Control-Grid) Voltage:      |                    |       |
| Negative value (dc and peak ac)        | 100                | volts |
| Positive value (dc and peak ac)        | 25                 | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage | 300                | volts |
| Grid-No.2 Voltage                      | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:      |                    |       |
| Negative-bias value                    | 50                 | volts |
| Positive-bias value                    | 0                  | volts |
| Plate Dissipation                      | 1.7                | watts |

|  |           |          |
|--|-----------|----------|
| Grid-No.3 Input .....                                  | 0.1       | watt     |
| Grid-No.2 Input:                                       |           |          |
| For grid-No.2 voltages up to 150 volts .....           | 1         | watt     |
| For grid-No.2 voltages between 150 and 300 volts ..... | See curve | page 300 |

**MAXIMUM CIRCUIT VALUES**

|                                    |      |        |
|------------------------------------|------|--------|
| Grid-No.3-Circuit Resistance ..... | 0.68 | megohm |
| Grid-No.1-Circuit Resistance:      |      |        |
| For fixed-bias operation .....     | 0.22 | megohm |
| For cathode-bias operation .....   | 0.47 | megohm |

Refer to chart at end of section. **6HZ8**

Refer to chart at end of section. **6J4**

Refer to chart at end of section. **6J4WA**


Refer to chart at end of section. **6J5**  
**6J5GT**

Refer to chart at end of section. **6J6**

**MEDIUM-MU TWIN TRIODE**

**6J6A**

5J6



**7BF**

Miniature type used as combined rf power amplifier and oscillator or as twin af amplifier. With push-pull arrangement of the grids and the plates in parallel, this type can also be used as a mixer at frequencies as high as 600 MHz. Outlines section, 5C; requires miniature 7-contact socket. Type 5J6 is identical with type 6J6A except for heater ratings.

|   |            |          |         |
|---|------------|----------|---------|
| Heater Voltage (ac/dc) .....                  | 5J6        | 6J6A     |         |
| Heater Current .....                          | 4.7        | 6.3      | volts   |
| Heater Warm-up Time (Average) .....           | 0.6        | 0.45     | ampere  |
| Peak Heater-Cathode Voltage .....             | 11         | 11       | seconds |
| Direct Interelectrode Capacitances            | ±100 max   | ±100 max | volts   |
| (Each Unit, Approx.):                         | Unshielded | Shielded |         |
| Grid to Plate .....                           | 1.6        | 1.6      | pF      |
| Grid to Cathode and Heater .....              | 2.2        | 2.6      | pF      |
| Plate to Cathode and Heater (Unit No.1) ..... | 0.4        | 1.6      | pF      |
| Plate to Cathode and Heater (Unit No.2) ..... | 0.4        | 1        | pF      |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 300 | volts |
| Grid Voltage, Positive-bias value ..... | 0   | volts |
| Plate Dissipation .....                 | 1.5 | watts |

**CHARACTERISTICS**

|                                  |      |       |
|----------------------------------|------|-------|
| Plate Voltage .....              | 100  | volts |
| Cathode-Bias Resistor .....      | 50†  | ohms  |
| Amplification Factor .....       | 38   |       |
| Plate Resistance (Approx.) ..... | 7100 | ohms  |
| Transconductance .....           | 5300 | μmhos |
| Plate Current .....              | 8.5  | mA    |

**MAXIMUM CIRCUIT VALUES**

|                                  |                 |        |
|----------------------------------|-----------------|--------|
| Grid-Circuit Resistance:         |                 |        |
| For fixed-bias operation .....   | Not recommended |        |
| For cathode-bias operation ..... | 0.5             | megohm |

† Value is for both units operating at the specified conditions.

## RF Power Amplifier and Oscillator—Class C Telegraphy

Key-down conditions per tube without modulation

## MAXIMUM RATINGS (Design-Center Values, Each Unit)

|                     |     |       |
|---------------------|-----|-------|
| Plate Voltage       | 300 | volts |
| Grid Voltage:       |     |       |
| Negative-bias value | 40  | volts |
| Positive-bias value | 0   | volts |
| Plate Current       | 15  | mA    |
| Grid Current        | 8   | mA    |
| Plate Input         | 4.5 | watts |
| Plate Dissipation   | 1.5 | watts |

## TYPICAL PUSH-PULL OPERATION (Both Units)

|                         |      |       |
|-------------------------|------|-------|
| Plate Voltage           | 150  | volts |
| Grid Voltage*           | -10  | volts |
| Plate Current           | 30   | mA    |
| Grid Current (Approx.)  | 16   | mA    |
| Driving Power (Approx.) | 0.35 | watt  |
| Power Output (Approx.)  | 3.5  | watts |

\* Obtained by grid resistor (625 ohms), cathode-bias resistor (220 ohms), or fixed supply.

6J6WA

Refer to chart at end of section.

6J6WB

Refer to chart at end of section.

6J7

6J7G

Refer to chart at end of section.

6J7GT

6J8G

Refer to chart at end of section.

6J9

Refer to chart at end of section.

6J10

Refer to chart at end of section.  
For replacement use type 6Z10/6J10.

6J11


Refer to chart at end of section.

## 6JB5/6HE5

## BEAM POWER TUBE

Duodecax type used as vertical-deflection amplifier in television receivers. Outlines section, 15D; requires duodecax 12-contact socket.

|  |          |        |
|--|----------|--------|
| Heater Voltage (ac/dc)                                 | 6.3      | volts  |
| Heater Current   | 0.8      | ampere |
| Heater Cathode Voltage:                                |          |        |
| Peak value   | ±200 max | volts  |
| Average value  | 100 max  | volts  |
| Direct Interelectrode Capacitances:                    |          |        |
| Grid No.1 to Plate                                     | 0.49     | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 9.5      | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | 6.5      | pF     |

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|   |      |       |       |
|---|------|-------|-------|
| Plate Voltage   | 60   | 250   | volts |
| Grid-No.2 (Screen-Grid) Voltage                         | 250  | 250   | volts |
| Grid-No.1 (Control-Grid) Voltage                        | 0    | -20   | volts |
| Plate Resistance (Approx.)                              | —    | 50000 | ohms  |
| Transconductance  | —    | 4100  | μmhos |
| Plate Current   | 180* | 43    | mA    |
| Grid-No.2 Current                                       | 20*  | 3.5   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | —    | -50   | volts |



\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

### Vertical-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                     |      |       |
|-------------------------------------|------|-------|
| DC Plate Voltage                    | 350  | volts |
| Peak Positive-Pulse Plate Voltage#  | 2500 | volts |
| Grid-No.2 Voltage                   | 300  | volts |
| Peak Cathode Current                | 260  | mA    |
| Average Cathode Current             | 75   | mA    |
| Plate Dissipation†                  | 15   | watts |
| Grid-No.2 Input†                    | 2.75 | watts |
| Bulb Temperature (At hottest point) | 200  | °C    |

#### MAXIMUM CIRCUIT VALUES


|                               |     |         |
|-------------------------------|-----|---------|
| Grid-No.1-Circuit Resistance: |     |         |
| For fixed-bias operation      | 1   | megohm  |
| For cathode-bias operation    | 2.2 | megohms |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

† A resistor or other means is required to protect the tube in absence of excitation.

Refer to chart at end of section.

6JB6



### BEAM POWER TUBE

### 6JB6A

12JB6A, 17JB6A

Novar types used as high-efficiency horizontal-deflection amplifiers in television receivers. Outlines section, 32A; requires novar 9-contact socket. Types 12JB6A and 17JB6A are identical with type 6JB6A except for heater ratings.

|  | 6JB6A    | 12JB6A   | 17JB6A   |         |
|--|----------|----------|----------|---------|
| Heater Voltage (ac/dc)                                 | 6.3      | 12.6     | 16.8     | volts   |
| Heater Current   | 1.2      | 0.6      | 0.45     | amperes |
| Heater Warm-up Time (Average)                          | —        | 11       | 11       | seconds |
| Heater-Cathode Voltage:                                |          |          |          |         |
| Peak value   | ±200 max | ±200 max | ±200 max | volts   |
| Average value  | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):          |          |          |          |         |
| Grid No.1 to Plate                                     |          |          | 0.2      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 |          |          | 15       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     |          |          | 6        | pF      |

### Class A<sub>1</sub> Amplifier

#### CHARACTERISTICS

|   | Triode Connection <sup>A</sup> | Pentode Connection             |       |
|---|--------------------------------|--------------------------------|-------|
| Plate Voltage                               | 150                            | 60 150                         | volts |
| Grid No.3 (Suppressor Grid)                 | —                              | Connected to cathode at socket |       |
| Grid-No.2 (Screen-Grid) Voltage             | —                              | 150 150                        | volts |
| Grid-No.1 (Control-Grid) Voltage            | -22.5                          | 0 -22.5                        | volts |
| Mu-Factor, Grid No.2 to Grid No.1           | 4.4                            | —                              |       |
| Plate Resistance (Approx.)                  | —                              | 15000                          | ohms  |
| Transconductance                            | —                              | 7100                           | μmhos |
| Plate Current                               | —                              | 390*                           | mA    |
| Grid-No.2 Current                           | —                              | 32*                            | mA    |
| Grid-No.1 Voltage for plate current of 1 mA | —                              | —42                            | volts |

<sup>A</sup> Grid No.2 connected to plate.

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)


|                                    |      |       |
|------------------------------------|------|-------|
| DC Plate Supply Voltage            | 770  | volts |
| Peak Positive-Pulse Plate Voltage# | 6500 | volts |

|   |      |       |
|---|------|-------|
| Peak Negative-Pulse Plate Voltage .....     | 1500 | volts |
| DC Grid-No.3 Voltage† .....                 | 70   | volts |
| DC Grid-No.2 Voltage .....                  | 220  | volts |
| DC Grid-No.1 Voltage .....                  | -55  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Peak Cathode Current .....                  | 550  | mA    |
| Average Cathode Current .....               | 175  | mA    |
| Plate Dissipation* .....                    | 17.5 | watts |
| Grid-No.2 Input .....                       | 3.5  | watts |
| Bulb Temperature (At hottest point) .....   | 240  | °C    |

**MAXIMUM CIRCUIT VALUE**

Grid-No.1-Circuit Resistance, for grid-resistor-bias operation ..... 1 megohm

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).  
 † For horizontal-deflection service, a positive voltage may be applied to grid No.3 to minimize 'snivets' interference in both vhf and uhf television receivers. A typical value is 30 volts.  
 \* A bias resistor or other means is required to protect the tube in absence of excitation.

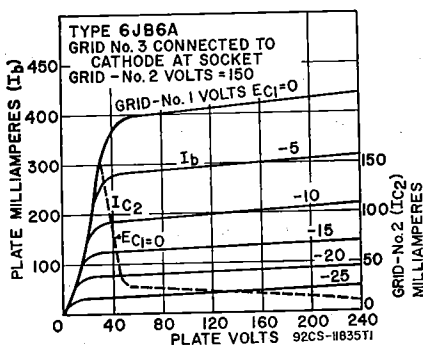
**6JC6**

Refer to chart at end of section.

**6JC6A****SHARP-CUTOFF PENTODE**

3JC6A, 4JC6A

Miniature type with frame grid used in if-amplifier stages of color and black-and-white television receivers utilizing intermediate frequencies in the order of 40 MHz. Outlines section, 6B; requires miniature 9-contact socket. Type 4JC6 is identical with type 6JC6 except for heater ratings. Types 3JC6A and 4JC6A are identical with type 6JC6A except for heater ratings.

**9PM**

|   | 3JC6A    | 4JC6A    | 6JC6A     |         |
|---|----------|----------|-----------|---------|
| Heater Voltage (ac/dc) .....  | 3.5      | 4.5      | 6.3       | volts   |
| Heater Current .....  | 0.6      | 0.45     | 0.3       | ampere  |
| Heater Warm-up Time (Average) .....   | 11       | 11       | —         | seconds |
| Heater-Cathode Voltage:   |          |          |           |         |
| Peak value .....  | ±200 max | ±200 max | ±200 max  | volts   |
| Average value .....   | 100 max  | 100 max  | 100 max   | volts   |
| Direct Interelectrode Capacitances:   |          |          |           |         |
| Grid No.1 to Plate .....  |          |          | 0.019 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... |          |          | 8.5       | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     |          |          | 3         | pF      |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|   |     |                    |       |
|---|-----|--------------------|-------|
| Plate Voltage .....                                       | 330 | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value ..... | 0   | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....              | 330 | 330                | volts |
| Grid-No.2 Voltage .....                                   |     | See curve page 300 |       |



|   |     |     |                    |
|---|-----|-----|--------------------|
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0   | 0   | volts              |
| Plate Dissipation                                     | 2.5 | 3.1 | watts              |
| Grid-No.2 Input:                                      |     |     |                    |
| For grid-No.2 voltages up to 165 volts                | 0.6 | 0.7 | watt               |
| For grid-No.2 voltages between 165 and 330 volts      |     |     | See curve page 300 |

**CHARACTERISTICS**

|  |       |                                |            |
|--|-------|--------------------------------|------------|
| Plate Supply Voltage   | 125   | 125                            | volts      |
| Grid No.3  |       | Connected to cathode at socket |            |
| Grid-No.2 Supply Voltage                                     | 125   | 125                            | volts      |
| Cathode-Bias Resistor  | 56    | 56                             | ohms       |
| Plate Resistance (Approx.)                                   | 0.18  | 0.18                           | megohm     |
| Transconductance   | 15000 | 16000                          | $\mu$ mhos |
| Plate Current  | 13    | 14                             | mA         |
| Grid-No.2 Current  | 3.2   | 3.4                            | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A | -3    | -3                             | volts      |

**MAXIMUM CIRCUIT VALUES**

|                               |      |      |        |
|-------------------------------|------|------|--------|
| Grid-No.1-Circuit Resistance: |      |      |        |
| For fixed-bias operation      | 0.25 | 0.25 | megohm |
| For cathode-bias operation    | 1    | 1    | megohm |

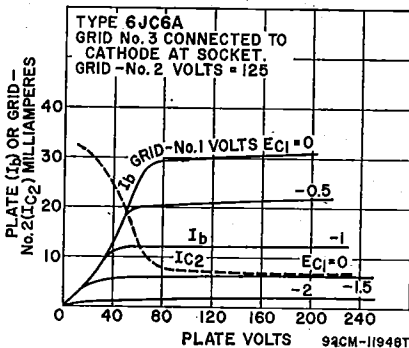

**MEDIUM-MU TRIODE—SHARP-CUTOFF PENTODE**

**6JC8**

Miniature type used as combined vhf oscillator and mixer tube in television receivers. Outlines section, 6B; requires miniature 9-contact socket. Heater: volts (ac/dc), 6.3; amperes, 0.45; warm-up time (average), 11 seconds; maximum heater-cathode volts,  $\pm$ 200 peak, 100 average.

**Class A<sub>1</sub> Amplifier**

| MAXIMUM RATINGS (Design-Maximum Values)               | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage   | 275         | 275                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —           | 275                | volts |
| Grid-No.2 Voltage                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0                  | volts |
| Plate Dissipation                                     | 1.7         | 2.3                | watts |
| Grid-No.2 Input:                                      |             |                    |       |
| For grid-No.2 voltages up to 137.5 volts              | —           | 0.45               | watt  |
| For grid-No.2 voltages between 137.5 and 275 volts    | —           | See curve page 300 |       |

**CHARACTERISTICS**

|                            |      |      |        |            |
|----------------------------|------|------|--------|------------|
| Plate Voltage              | 125  | 100  | 125    | volts      |
| Grid-No.2 Voltage          | —    | 70   | 125    | volts      |
| Grid-No.1 Voltage          | -1   | 0    | -1     | volt       |
| Amplification Factor       | 40   | —    | —      |            |
| Plate Resistance (Approx.) | 6000 | —    | 300000 | ohms       |
| Transconductance           | 6500 | 5700 | 5500   | $\mu$ mhos |
| Plate Current              | 12   | —    | 9      | mA         |
| Grid-No.2 Current          | —    | —    | 2.2    | mA         |

Grid-No.1 Voltage (Approx.) for plate current of  
20  $\mu$ A ..... —7 — 6.5 volts

**MAXIMUM CIRCUIT VALUES**


Grid-No.1-Circuit Resistance: ..... — 0.1 megohm  
For fixed-bias operation ..... — 0.5 megohm  
For cathode-bias operation .....

**6JD5**

For replacement use type 6JH5/6JD5/6HZ5

**6JD6****SHARP-CUTOFF PENTODE****4JD6**


Miniature type with frame grid used as if-amplifier tube in color and black-and-white television receivers utilizing an intermediate frequency in the order of 40 MHz. Outlines section, 6B; requires miniature 9-contact socket. Type 4JD6 is identical with type 6JD6 except for heater ratings.

**9PM**

|  |               |               |         |
|--|---------------|---------------|---------|
| Heater Voltage (ac/dc) .....   | 4JD6<br>4.5   | 6JD6<br>6.3   | volts   |
| Heater Current .....   | 0.45          | 0.3           | ampere  |
| Heater Warm-up Time (Average) .....  | 11            | —             | seconds |
| Heater-Cathode Voltage:  |               |               |         |
| Peak value .....   | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....  | 100 max       | 100 max       | volts   |
| Direct Interelectrode Capacitances:  |               |               |         |
| Grid No.1 to Plate .....   |               | 0.019 max     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and<br>Internal Shield ..... |               | 8.2           | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and<br>Internal Shield .....     |               | 3             | pF      |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value .....   | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 2.5                | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 0.6                | watt  |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

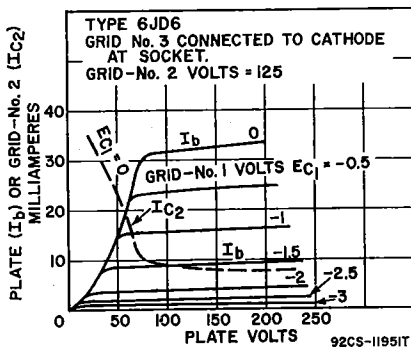**CHARACTERISTICS**

|                                |     |       |
|--------------------------------|-----|-------|
| Plate Supply Voltage .....     | 125 | volts |
| Grid-No.3 Voltage .....        | 0   | volts |
| Grid-No.2 Supply Voltage ..... | 125 | volts |

|  |        |            |
|--|--------|------------|
| Grid-No.1 Supply Voltage .....   | 0      | volts      |
| Cathode-Bias Resistor .....  | 56     | ohms       |
| Plate Resistance (Approx.) .....   | 160000 | ohms       |
| Transconductance .....   | 14000  | $\mu$ mhos |
| Plate Current .....  | 15     | mA         |
| Grid-No.2 Current .....  | 4      | mA         |
| Grid-No.1 Voltage (Approx.) for transconductance of 600 $\mu$ mhos ..... | -4.5   | volts      |

**MAXIMUM CIRCUIT VALUES**


|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 1    | megohm |

Refer to chart at end of section.  
For replacement use type 6LQ6/6JE6C. **6JE6**

Refer to chart at end of section.  
For replacement use type 6LQ6/6JE6C. **6JE6A**

Refer to chart at end of section.  
For replacement use type 6LQ6/6JE6C. **6JE6C**

Refer to chart at end of section. **6JE8**



9QL

**BEAM POWER TUBE**

**6JF6**

17JF6, 22JF6

Novar type used as horizontal-deflection amplifier in black-and-white television receivers. Outlines section, 18A; requires novar 9-contact socket. Types 17JF6 and 22JF6 are identical with type 6JF6 except for heater ratings.

|  |               |               |               |         |
|--|---------------|---------------|---------------|---------|
|  | <b>6JF6</b>   | <b>17JF6</b>  | <b>22JF6</b>  |         |
| Heater Voltage (ac/dc) .....                                 | 6.3           | 16.8          | 22            | volts   |
| Heater Current .....   | 1.6           | 0.6           | 0.45          | amperes |
| Heater Warm-up Time (Average) ....                           | —             | 11            | 11            | seconds |
| Heater-Cathode Voltage:                                      |               |               |               |         |
| Peak value .....   | $\pm 200$ max | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....  | 100 max       | 100 max       | 100 max       | volts   |
| Direct Interelectrode Capacitances (Approx.):                |               |               |               |         |
| Grid No.1 to Plate .....                                     |               |               | 1.2           | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |               |               | 22            | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |               |               | 9             | pF      |

**Class A<sub>1</sub> Amplifier**

|   |                                |                           |       |            |
|---|--------------------------------|---------------------------|-------|------------|
|   | <b>Triode*</b>                 |                           |       |            |
|   | <b>Connection</b>              | <b>Pentode Connection</b> |       |            |
| <b>CHARACTERISTICS</b>                            |                                |                           |       |            |
| Plate Voltage .....                               | 125                            | 50                        | 130   | volts      |
| Peak Positive-Pulse Plate Voltage# .....          | —                              | 6500                      | —     | volts      |
| Grid No.3 (Suppressor Grid) .....                 | Connected to cathode at socket |                           |       |            |
| Grid-No.2 (Screen-Grid) Voltage .....             | 125                            | 125                       | 125   | volts      |
| Grid-No.1 (Control-Grid) Voltage .....            | -20                            | —                         | 0     | -20        |
| Triode Amplification Factor .....                 | 4.1                            | —                         | —     |            |
| Plate Resistance (Approx.) .....                  | —                              | —                         | 12000 | ohms       |
| Transconductance .....                            | —                              | —                         | 10000 | $\mu$ mhos |
| Plate Current .....                               | —                              | —                         | 80    | mA         |
| Grid-No.2 Current .....                           | —                              | 32 $\dagger$              | 2.5   | mA         |
| Grid-No.1 Voltage for plate current of 1 mA ..... | —                              | -125                      | -40   | volts      |



**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |      |       |
|--|------|-------|
| DC Plate Supply Voltage .....            | 770  | volts |
| Peak Positive-Pulse Plate Voltage# ..... | 6500 | volts |
| Peak Negative-Pulse Plate Voltage .....  | 1500 | volts |
| DC Grid-No.3 Voltage* .....              | 100  | volts |

|   |     |       |
|---|-----|-------|
| DC Grid-No.2 Voltage .....                  | 220 | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330 | volts |
| Peak Cathode Current .....                  | 950 | mA    |
| Average Cathode Current .....               | 275 | mA    |
| Grid-No.2 Input .....                       | 3.5 | watts |
| Plate Dissipation† .....                    | 17  | watts |
| Bulb Temperature (At hottest point) .....   | 240 | °C    |

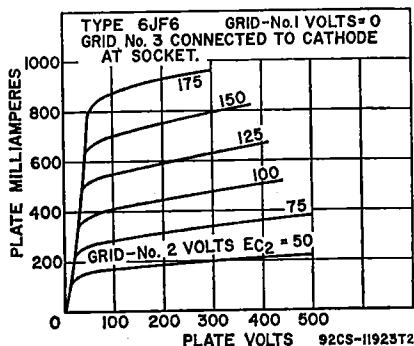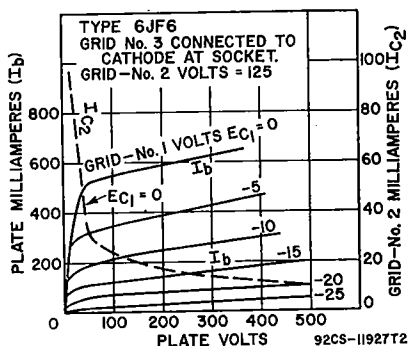

#### MAXIMUM CIRCUIT VALUES

##### Grid-No.1-Circuit Resistance:

|                                    |      |         |
|------------------------------------|------|---------|
| For cathode-bias operation .....   | 1    | megohm  |
| For grid-leak-bias operation ..... | 10   | megohms |
| For fixed-bias operation .....     | 0.47 | megohm  |

■ Grid-No.2 connected to plate at socket.

† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).


\* In this service, a positive value may be applied to grid No.3 to minimize "snivets" interference; a typical value for this voltage is 50 volts.

‡ A bias resistor or other means is required to protect the tube in absence of excitation.

## 6JG5

## SHARP-CUTOFF PENTODE

Miniature type with frame grid used as video output amplifier in color television receivers. **Outlines section, 6E;** requires miniature 9-contact socket. **Heater:** volts, 6.3; amperes, 0.525; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.



95F

#### Class A<sub>1</sub> Amplifier

##### MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....                                       | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value ..... | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....              | 330                | volts |
| Grid-No.2 Voltage .....                                   | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive value .....    | 0                  | volts |
| Plate Dissipation .....                                   | 5                  | watts |
| Grid-No.2 Input .....                                     | 1.1                | watts |

##### CHARACTERISTICS

|  |       |     |            |
|--|-------|-----|------------|
| Plate Voltage .....  | 200   | 60  | volts      |
| Grid-No.2 Supply Voltage .....                                     | 150   | 150 | volts      |
| Grid-No.1 Voltage .....  | —     | 0   | volts      |
| Cathode-Bias Resistor, Bypassed .....                              | 100   | —   | ohms       |
| Plate Resistance (Approx.) .....                                   | 60000 | —   | ohms       |
| Transconductance (Grid No.1 to Plate) .....                        | 11500 | —   | $\mu$ mhos |
| Plate Current .....  | 25    | 55  | mA         |
| Grid No.2 Current .....  | 5.5   | 18  | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | -10   | —   | volts      |

**MAXIMUM CIRCUIT VALUES**

|                               |      |        |
|-------------------------------|------|--------|
| Grid-No.1-Circuit Resistance: |      |        |
| For fixed-bias operation      | 0.25 | megohm |
| For cathode-bias operation    | 1    | megohm |


\* Applied not exceeding two seconds, to avoid damage to tube.

Refer to chart at end of section.

**6JG6**

**6JG6A**

17JG6A, 22JG6A



**BEAM POWER TUBE**

Novar type used as horizontal-deflection amplifier in low-B+, black-and-white television receivers. Outlines section, 31B; requires novar 9-contact socket. For curves of average plate characteristics, refer to type 6JF6. Types 17JG6A and 22JG6A are identical with type 6JG6A except for heater ratings.

|   |          |          |          |         |
|---|----------|----------|----------|---------|
| Heater Voltage (ac/dc)                                  | 6JG6A    | 17JG6A   | 22JG6A   |         |
| Heater Current  | 6.8      | 16.8     | 22       | volts   |
| Heater Warm-up Time (Average)                           | 1.6      | 0.6      | 0.45     | amperes |
| Heater-Cathode Voltage:                                 |          | 11       | 11       | seconds |
| Peak value  | ±200 max | ±200 max | ±200 max | volts   |
| Average value   | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                     |          |          |          |         |
| Grid No.1 to Plate                                      |          |          | 0.7      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No. 3 |          |          | 22       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3      |          |          | 9        | pF      |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|   |                                   |                       |       |
|---|-----------------------------------|-----------------------|-------|
|   | Triode <sup>a</sup><br>Connection | Pentode<br>Connection |       |
| Plate Voltage   | 125                               | 50                    | 130   |
| Grid-No.3 (Suppressor Grid)                               | —                                 | 125                   | 125   |
| Grid-No.2 (Screen-Grid) Voltage                           | —                                 | 0                     | -20   |
| Grid-No.1 (Control-Grid) Voltage                          | -20                               | —                     | —     |
| Amplification Factor                                      | 4.1                               | —                     | —     |
| Plate Resistance (Approx.)                                | —                                 | —                     | 12000 |
| Transconductance  | —                                 | —                     | 10000 |
| Plate Current   | —                                 | 525*                  | 80    |
| Grid-No.2 Current   | —                                 | 32*                   | 2.5   |
| Grid-No.1 Voltage (Approx.),<br>for plate current of 1 mA | —                                 | —                     | -40   |
|   |                                   |                       | volts |

\* With grid No.2 connected to plate at socket.

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |      |       |
|--|------|-------|
| DC Plate Supply Voltage                        | 770  | volts |
| Peak Positive-Pulse Plate Voltage <sup>#</sup> | 6500 | volts |
| Peak Negative-Pulse Plate Voltage              | 1500 | volts |
| DC Grid-No.3 Voltage*                          | 75   | volts |
| DC Grid-No.2 Voltage                           | 220  | volts |
| DC Grid-No.1 Voltage, Negative-bias value      | -55  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage          | 330  | volts |
| Peak Cathode Current                           | 950  | mA    |
| Average Cathode Current                        | 275  | mA    |
| Plate Dissipation†                             | 17   | watts |
| Grid-No.2 Input                                | 3.5  | watts |
| Bulb Temperature (At hottest point)            | 240  | °C    |

**MAXIMUM CIRCUIT VALUE**

Grid-No.1-Circuit Resistance, for grid-No.1-resistor-bias operation 2.2 megohms

<sup>#</sup> Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* In a horizontal-deflection-amplifier service, a positive voltage (typical value, 30 volts) may be applied to grid No.3 to reduce "snivets" interference, which may occur in both vhf and uhf television receivers.

† A bias resistor or other means is required to protect the tube in absence of excitation.

**6JH5**

6JH5/6HZ5/6JD5

**BEAM TRIODE**

Duodecar type used as a pulse-type regulator in the high-voltage power supply of color television receivers. Outlines section, 15F; requires duodecar 12-contact socket. Heater: volts (ac/dc), 6.3; amperes, 2.4.

**Class A<sub>1</sub> Amplifier****CHARACTERISTICS**

|  |                                |       |
|--|--------------------------------|-------|
| Pulse Plate Voltage*                             | 3500                           | volts |
| Grid No.2 (Beam Plate)                           | Connected to cathode at socket |       |
| Grid-Voltage, Negative-bias value                | 4.4                            | volts |
| Peak Plate Current                               | 300                            | mA    |
| Amplification Factor                             | 300                            |       |
| Transconductance                                 | 65000                          | μmhos |
| Plate Resistance (Approx.)                       | 4600                           | ohms  |
| Grid Voltage (Approx.) for plate current of 1 mA | -16                            | volts |

\* Duty cycle of the pulse must be less than 2.5%.

**High-Voltage Regulator Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                     |           |       |
|-------------------------------------|-----------|-------|
| Peak Plate Voltage#                 | 5500      | volts |
| Plate Dissipation                   | 35        | watts |
| Peak Plate Current                  | 325       | mA    |
| Heater-Cathode Voltage:             |           |       |
| Peak value                          | +200 —450 | volts |
| Average value                       | 100       | volts |
| Bulb Temperature (At hottest point) | 240       | °C    |

**MAXIMUM CIRCUIT VALUE**

|                                      |     |        |
|--------------------------------------|-----|--------|
| Grid-Circuit Resistance <sup>▲</sup> | 0.1 | megohm |
|--------------------------------------|-----|--------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).



▲ Larger values of grid-circuit resistance may be used if provisions are made to protect the tube.

**6JH6**

4JH6

**SEMIREMOTE-CUTOFF  
PENTODE**

Miniature type used in the gain-controlled picture if-amplifier stages of color and black-and-white television receivers. Outlines section, 5C; requires miniature 7-contact socket. For curves of average plate characteristics, refer to type 6BZ6. Type 4JH6 is identical with type 6JH6 except for heater ratings.

**12JE****7CM**

|   |             |               |         |
|---|-------------|---------------|---------|
| Heater Arrangement  | 4JH6 Series | 6JH6 Parallel |         |
| Heater Voltage (ac/dc)  | 4.2         | 6.3           | volts   |
| Heater Current  | 0.45        | 0.3           | ampere  |
| Heater Warm-up Time   | 11          | —             | seconds |
| Heater-Cathode Voltage:   |             |               |         |
| Peak value  | ±200 max    | ±200 max      | volts   |
| Average value   | 100 max     | 100 max       | volts   |
| Direct Interelectrode Capacitances:                                     | Unshielded  | Shielded*     |         |
| Grid No.1 to Plate  | 0.025 max   | 0.015 max     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 7           | 7             | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 2           | 3             | pF      |

\* With external shield connected to cathode.



**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**


|   |                    |       |
|---|--------------------|-------|
| Plate Voltage   | 300                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value   | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | 300                | volts |
| Grid-No.2 Voltage                                     | See curve page 300 | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0                  | volts |
| Grid-No.2 Input:                                      |                    |       |
| For grid-No.2 voltages up to 150 volts                | 0.55               | watt  |
| For grid-No.2 voltages between 150 and 300 volts      | See curve page 300 |       |

**CHARACTERISTICS**

|   |                                |            |
|---|--------------------------------|------------|
| Plate Supply Voltage  | 125                            | volts      |
| Grid-No.3   | Connected to cathode at socket | volts      |
| Grid-No.2 Supply Voltage  | 125                            | volts      |
| Cathode-Bias Resistor   | 56                             | ohms       |
| Plate Resistance (Approx.)  | 0.26                           | megohm     |
| Transconductance  | 8000                           | $\mu$ mhos |
| Transconductance Range for grid-No.1 voltage of -4.5 volts and cathode-bias resistor of 56 ohms |                                |            |
| Plate Current   | 400-900                        | $\mu$ mhos |
| Grid-No.2 Current   | 14                             | mA         |
| Grid-No.1 Current   | 3.6                            | mA         |
| Grid-No.1 Voltage (Approx.) for transconductance of 50 $\mu$ mhos                               | -19                            | volts      |

**MAXIMUM CIRCUIT VALUES**

|                               |      |        |
|-------------------------------|------|--------|
| Grid-No.1-Circuit Resistance: |      |        |
| For fixed-bias operation      | 0.25 | megohm |
| For cathode-bias operation    | 1    | megohm |



**BEAM-DEFLECTION TUBE**

**6JH8**

Miniature type used in color-demodulator and burst-gate circuits in color television receivers. This type has two plates and two deflecting electrodes; the control grid varies beam deflection. Outlines section, 6E; requires miniature 9-contact socket. Pin 5 should be connected to cathode at socket. The 6JH8 should be

so located in the equipment that it is not subjected to stray magnetic fields.

|   |          |         |
|---|----------|---------|
| Heater Voltage (ac/dc)                                  | 6.3      | volts   |
| Heater Current  | 0.3      | amperes |
| Direct Interelectrode Capacitances:                     |          |         |
| Grid No.1 to All Other Electrodes, Except Both Plates   | 7.5      | pF      |
| Grid No.1 to Deflecting Electrode No.1                  | 0.04 max | pF      |
| Grid No.1 to Deflecting Electrode No.2                  | 0.07 max | pF      |
| Plate No.1 to All Other Electrodes                      | 5        | pF      |
| Plate No.2 to All Other Electrodes                      | 5        | pF      |
| Plate No.1 to Plate No.2                                | 0.4      | pF      |
| Deflecting Electrode No.1 to All Other Electrodes       | 4.8      | pF      |
| Deflecting Electrode No.2 to All Other Electrodes       | 4.8      | pF      |
| Deflecting Electrode No. 1 to Deflecting Electrode No.2 | 0.38     | pF      |

**Color TV Demodulator**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage (Each Plate)                            | 330 | volts |
| Peak Deflecting-Electrode Voltage (Each Electrode):   |     |       |
| Negative value  | 165 | volts |
| Positive value  | 165 | volts |
| Grid-No.3 (Accelerating-Grid) Voltage                 | 330 | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0   | volts |
| Cathode Current                                       | 33  | mA    |
| Plate Dissipation (Each Plate)                        | 3   | watts |
| Grid-No.3 Input                                       | 1   | watt  |

**MAXIMUM CIRCUIT VALUES**

|                               |      |        |
|-------------------------------|------|--------|
| Grid-No.1 Circuit Resistance: |      |        |
| For fixed-bias operation      | 0.1  | megohm |
| For cathode-bias operation    | 0.25 | megohm |

Class A<sub>1</sub> Amplifier

With both plates connected together and with both deflecting electrodes connected to cathode at socket

## CHARACTERISTICS

|  |      |            |
|--|------|------------|
| Plate-No.1 Supply Voltage .....                                      | 250  | volts      |
| Plate-No.2 Supply Voltage .....                                      | 250  | volts      |
| Grid-No.3 Voltage .....  | 250  | volts      |
| Cathode-Bias Resistor .....  | 220  | ohms       |
| Transconductance .....   | 4400 | $\mu$ mhos |
| Total Plate Current .....  | 14   | mA         |
| Grid-No.3 Current .....  | 1.5  | mA         |
| Grid-No.1 Voltage (Approx.) for total plate current of 10 $\mu$ A .. | -13  | volts      |

**6JK6** Refer to chart at end of section.

**6JK8** Refer to chart at end of section.


**6JM6** Refer to chart at end of section.

**6JM6A**

17JM6A

## BEAM POWER TUBE

Duodecator types used as horizontal-amplifier tubes in color and black-and-white television receivers. Outlines section, 16A; requires duodecator 12-contact socket. Type 17JM6A is identical with type 6JM6A except for heater ratings.



12FJ

|  | 6JM6A         | 17JM6A        |         |
|--|---------------|---------------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3           | 16.8          | volts   |
| Heater Current .....   | 1.2           | 0.45          | amperes |
| Heater Warm-up Time (Average) .....                          | —             | 11            | seconds |
| Heater-Cathode Voltage:                                      |               |               |         |
| Peak value .....   | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....  | 100 max       | 100 max       | volts   |
| Direct Interelectrode Capacitances:                          |               |               |         |
| Grid No.1 to Plate .....                                     | —             | 0.6           | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | —             | 16            | pF      |
| Plate to Cathode, Heater, Grid No. 2, and Grid No. 3 .....   | —             | 7             | pF      |

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|  | Pentode Connection             |      | Triode** Connection |       |            |
|--|--------------------------------|------|---------------------|-------|------------|
| Plate Voltage .....  | 5000                           | 55   | 250                 | 150   | volts      |
| Grid-No.3 (Suppressor-Grid) .....                                | Connected to cathode at socket |      |                     |       |            |
| Grid-No.2 (Screen-Grid) Voltage .....                            | 150                            | 150  | 150                 | 150   | volts      |
| Grid-No.1 (Control-Grid) Voltage .....                           | —                              | 0    | -22.5               | -22.5 | volts      |
| Plate Resistance (Approx.) .....                                 | —                              | —    | 15000               | —     | ohms       |
| Transconductance .....   | —                              | —    | 7300                | —     | $\mu$ mhos |
| Plate Current .....  | —                              | 345* | 65                  | —     | mA         |
| Grid-No.2 Current .....  | —                              | 30*  | 1.8                 | —     | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 1 $\mu$ A ..... | -100                           | —    | -42                 | —     | volts      |
| Amplification Factor .....                                       | —                              | —    | —                   | 4.4   |            |

## MAXIMUM CIRCUIT VALUE

|                                    |   |        |
|------------------------------------|---|--------|
| Grid-No.1-Circuit Resistance ..... | 1 | megohm |
|------------------------------------|---|--------|

\* This value can be measured by a method utilizing a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

\*\* Grid No.2 tied to plate.

## Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Maximum Values)

|  |      |       |
|--|------|-------|
| DC Plate Supply Voltage .....            | 770  | volts |
| Peak Positive-Pulse Plate Voltage# ..... | 6500 | volts |
| Peak Negative-Pulse Plate Voltage .....  | 1500 | volts |
| DC Grid-No.3 Voltage .....               | 70   | volts |


|   |      |       |
|---|------|-------|
| DC Grid-No.2 Voltage .....                      | 220  | volts |
| DC Grid-No.1 Voltage, Negative-bias value ..... | 55   | volts |
| Peak Negative-Pulse Grid-No.1 Voltage .....     | 330  | volts |
| Average Cathode Current .....                   | 175  | mA    |
| Peak Cathode Current .....                      | 550  | mA    |
| Plate Dissipation## .....                       | 17.5 | watts |
| Grid-No.2 Input .....                           | 3.5  | watts |
| Bulb Temperature (At hottest point) .....       | 220  | °C    |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).  
## A bias resistor or other means is required to protect the tube in absence of excitation.

## 6JN6


### BEAM POWER TUBE

12JN6, 17JN6



Duodecar type used as horizontal-amplifier tube in color and black-and-white television receivers. Outlines section, 15A; requires duodecar 12-contact socket. This type is electrically identical with type 6JM6 except that it has a slightly lower grid-No.1-to-plate capacitance. Types 12JN6 and 17JN6 are identical with type 6JN6 except for heater ratings.

|  |      |       |       |         |
|--|------|-------|-------|---------|
| Heater Voltage (ac/dc) .....                                 | 6JN6 | 12JN6 | 17JN6 |         |
| Heater Current .....   | 6.3  | 12.6  | 16.8  | volts   |
| Heater Warm-up Time (Average) .....                          | 1.2  | 0.6   | 0.45  | amperes |
| Direct Interelectrode Capacitances:                          |      | 11    | 11    | seconds |
| Grid No.1 to Plate .....                                     |      |       | 0.34  | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |      |       | 16    | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |      |       | 7     | pF      |



### MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

## 6JN8

19JN8/19CL8A

Miniature type used as FM converter and rf amplifier in radio receivers. Outlines section, 6B; requires miniature 9-contact socket. Type 19JN8/19CL8A is identical with type 6JN8 except for heater ratings.

|   |          |                  |         |
|---|----------|------------------|---------|
| Heater Voltage (ac/dc) .....  | 6JN8     | 19JN8/<br>19CL8A |         |
| Heater Current .....  | 6.3      | 18.9             | volts   |
| Heater Warm-up Time (Average) .....   | 0.45     | 0.15             | amperes |
| Heater-Cathode Voltage:   | 11       | —                | seconds |
| Peak value .....  | ±200 max | ±200 max         | volts   |
| Average value .....   | 100 max  | 100 max          | volts   |
| Direct Interelectrode Capacitances:*<br>Pentode Unit:                           |          |                  |         |
| Grid No.1 to Plate .....  |          | 0.01             | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....   |          | 5.5              | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....       |          | 3.4              | pF      |
| Triode Unit:  |          |                  |         |
| Grid to Plate .....   |          | 1.7              | pF      |
| Grid to Cathode, Heater, Pentode Cathode, Grid No.3, and Internal Shield .....  |          | 3.2              | pF      |
| Plate to Cathode, Heater, Pentode Cathode, Grid No.3, and Internal Shield ..... |          | 2.2              | pF      |

\* With external shield connected to cathode of unit under test.

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|  |     |                    |       |
|--|-----|--------------------|-------|
| Plate Voltage .....                          | 300 | 300                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage ..... | —   | 300                | volts |
| Grid-No.2 Voltage .....                      | —   | See curve page 300 |       |

Triode Unit Pentode Unit

|   |     |           |          |
|---|-----|-----------|----------|
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0   | 0         | volts    |
| Plate Dissipation                                     | 2.5 | 2.5       | watts    |
| Grid-No.2 Input:                                      |     | 0.55      | watt     |
| For grid-No.2 voltages up to 150 volts                | —   | See curve | page 300 |
| For grid-No.2 voltages between 150 and 300 volts      | —   | See curve | page 300 |

**CHARACTERISTICS**

|  |      |        |       |
|--|------|--------|-------|
| Plate Voltage  | 125  | 125    | volts |
| Grid-No.2 Voltage                                      | —    | 125    | volts |
| Grid-No.1 Voltage                                      | —1   | —1     | volt  |
| Amplification Factor                                   | 46   | —      |       |
| Plate Resistance (Approx.)                             | 5400 | 200000 | ohms  |
| Transconductance                                       | 8500 | 7500   | μmhos |
| Plate Current  | 13.5 | 12     | mA    |
| Grid-No.2 Current                                      | —    | 4      | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | —8   | —8     | volts |

**MAXIMUM CIRCUIT VALUES**


|                               |     |     |         |
|-------------------------------|-----|-----|---------|
| Grid-No.1-Circuit Resistance: |     |     |         |
| For fixed-bias operation      | 2.2 | 2.2 | megohms |
| For cathode-bias operation    | 2.2 | 2.2 | megohms |

**6JQ6**

12JQ6, 17JQ6,

**BEAM POWER TUBE  
with integral diode**

Miniature type featuring integral diode, internally connected to grid No.3, used in feedback-stabilized vertical-deflection-amplifier applications in color and black-and-white television receivers. Outlines section, 6G; requires miniature 9-contact socket. Types 12JQ6 and 17JQ6 are identical with type 6JQ6 except for heater ratings.



9RA

|   | 6JQ6     | 12JQ6    | 17JQ6    |         |
|---|----------|----------|----------|---------|
| Heater Voltage (ac/dc)  | 6.3      | 12.6     | 17       | volts   |
| Heater Current  | 1.2      | 0.6      | 0.45     | amperes |
| Heater Warm-up Time (Average)                                       | —        | 11       | 11       | seconds |
| Heater-Cathode Voltage:   |          |          |          |         |
| Peak value  | ±200 max | ±200 max | ±200 max | volts   |
| Average value   | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                                 |          |          |          |         |
| Grid No.1 to Plate  |          |          | 0.32     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Diode Plate |          |          | 13       | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Diode Plate     |          |          | 6        | pF      |

**Class A<sub>1</sub> Amplifier****CHARACTERISTICS**

|   |      |       |       |
|---|------|-------|-------|
| Plate Voltage   | 40   | 140   | volts |
| Grid-No.3 (Suppressor-Grid) Voltage   | 0    | 0     | volts |
| Grid-No.2 (Screen-Grid) Voltage   | 120  | 140   | volts |
| Grid-No.1 (Control-Grid) Voltage  | 0    | —18   | volts |
| Triode Amplification Factor*  | —    | 6.5   |       |
| Plate Resistance (Approx.)  | —    | 10500 | ohms  |
| Transconductance  | —    | 4200  | μmhos |
| Plate Current   | 150# | 35    | mA    |
| Grid-No.2 Current   | 20#  | 2.5   | mA    |
| Grid-No.1 Voltage for plate current of 1 mA   | —    | —37   | volts |
| Instantaneous Diode-Plate-to-Cathode Voltage Drop for Instantaneous Diode-Plate Current of 2 mA | —    | 5     | volts |



**Vertical-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| DC Plate Voltage  | 425  | volts |
| Peak Positive-Pulse Plate Voltage (Absolute-Maximum Value)* | 2000 | volts |
|   | +10  | volts |
| DC Grid-No.3 and Diode-Plate Voltage                        | —150 | volts |

|   |     |       |
|---|-----|-------|
| DC Grid-No.2 Voltage .....                        | 330 | volts |
| Peak Negative-Pulse Grid-No.1 Voltage .....       | 150 | volts |
| Average Cathode Current .....                     | 70  | mA    |
| Peak Cathode Current .....                        | 250 | mA    |
| Average Diode-Plate (and Grid-No.3) Current ..... | 1   | mA    |
| Plate Dissipation .....                           | 10  | watts |
| Grid-No.2 Input .....                             | 2   | watts |
| Bulb Temperature (At hottest point) .....         | 240 | °C    |

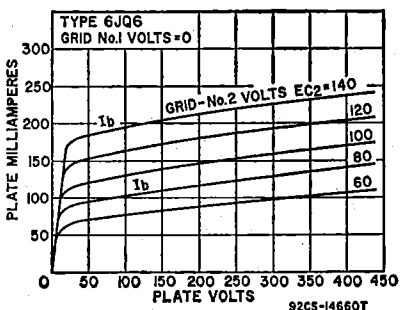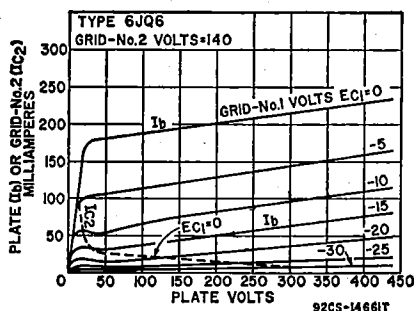

**MAXIMUM CIRCUIT VALUES**


Grid-No.1—Circuit Resistance:

|   |     |         |
|---|-----|---------|
| For grid-No.1-resistor-bias operation ..... | 2.2 | megohms |
| For cathode-bias operation .....            | 2.2 | megohms |

\* Grid No.3 and diode plate connected to cathode, and grid-No.2 connected to plate at socket.

# This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

\* Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).



**BEAM POWER TUBE**

**6JR6**

17JR6, 22JR6, 33JR6

Novar type used for horizontal-deflection amplifier service in low B+, black-and-white television receivers. Outlines section, 31B; requires novar 9-contact socket. Types 17JR6, 22JR6 and 33JR6 are identical with type 6JR6 except for heater ratings.



|  | 6JR6     | 17JR6    | 22JR6    | 33JR6    |         |
|--|----------|----------|----------|----------|---------|
| Heater Voltage (ac/dc)                                       | 6.3      | 16.8     | 22       | 33       | volts   |
| Heater Current .....   | 1.6      | 0.6      | 0.45     | 0.3      | amperes |
| Heater Warm-up Time (Average) .....                          | —        | 11       | 11       | 11       | seconds |
| Heater-Cathode Voltage:                                      |          |          |          |          |         |
| Peak value .....   | ±200 max | ±200 max | ±200 max | ±200 max | volts   |
| Average value .....  | 100 max  | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):                |          |          |          |          |         |
| Grid No.1 to Plate .....                                     |          |          |          | 0.7      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |          |          |          | 22       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |          |          |          | 9        | pF      |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|  | Triode* Connection | Pentode Connection             |       |       |
|--|--------------------|--------------------------------|-------|-------|
|  | 125                | 50                             | 130   | volts |
| Plate Voltage .....                    | —                  | 6500                           | —     | volts |
| Peak Positive-Pulse Plate Voltage#     | —                  | —                              | —     | —     |
| Grid No.3 (Suppressor Grid) .....      | —                  | Connected to cathode at socket |       | —     |
| Grid-No.2 (Screen-Grid) Voltage .....  | 125                | 125                            | 125   | volts |
| Grid-No.1 (Control-Grid) Voltage ..... | -20                | 0                              | -20   | volts |
| Plate Resistance (Approx.):            | —                  | —                              | 18000 | ohms  |
| Transconductance .....                 | —                  | —                              | 7000  | μmhos |

|   |     |     |      |     |       |
|---|-----|-----|------|-----|-------|
| Plate Current                               | —   | —   | 470‡ | 45  | mA    |
| Grid-No.2 Current                           | —   | —   | 32‡  | 1.5 | mA    |
| Grid-No.1 Voltage for plate current of 1 mA | —   | -75 | —    | -32 | volts |
| Amplification Factor                        | 4.7 | —   | —    | —   |       |

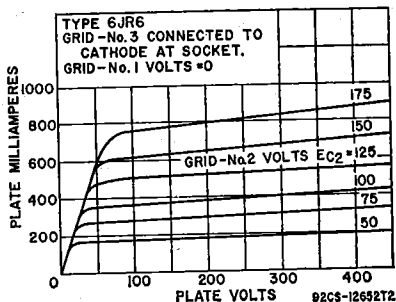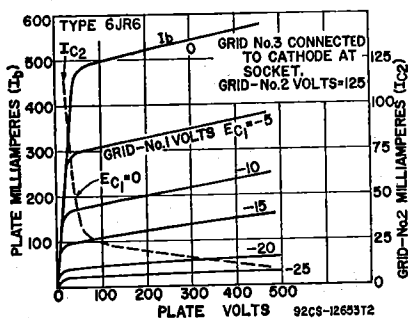

### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Ratings)

|  |      |       |
|--|------|-------|
| Plate Supply Voltage                   | 770  | volts |
| Peak Positive-Pulse Plate Voltage#     | 6500 | volts |
| Peak Negative-Pulse Plate Voltage      | 1500 | volts |
| Grid-No.3 Voltage*                     | 75   | volts |
| Grid-No.2 Voltage                      | 220  | volts |
| Grid-No.1 Voltage, Negative-bias value | 55   | volts |
| Peak Negative-Pulse Grid-No.1 Voltage  | 330  | volts |
| Peak Cathode Current                   | 950  | mA    |
| Average Cathode Current                | 275  | mA    |
| Grid-No.2 Input                        | 3.5  | watts |
| Plate Dissipation*                     | 17   | watts |
| Bulb Temperature (At hottest point)    | 240  | °C    |

#### MAXIMUM CIRCUIT VALUES

Grid-No.1-Circuit Resistance:

|  |      |         |
|--|------|---------|
| Cathode bias (with min. $R_K = 100\Omega$ )            | 1    | megohm  |
| Grid-leak bias (with signal peak clamped to zero bias) | 10   | megohms |
| Fixed bias (where positive grid current is not drawn)  | 0.47 | megohm  |

\* Grid No. 2 connected to plate at socket.

# Pulse duration must not exceed 15% of one horizontal scanning cycle (10 microseconds).  
 ‡ This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

■ In this service, a positive value may be applied to grid No.3 to minimize "snivets" interference; a typical value for this voltage is 30 volts.

• A bias resistor or other means is required to protect the tube in absence of excitation.

6JS6  
6JS6A


Refer to chart at end of section.

6JS6C

### BEAM POWER TUBE

23JS6A, 31JS6C

Duodecar types used as horizontal-deflection amplifiers in color and black-and-white television receivers. Outlines section, 16B; requires duodecar 12-contact socket. Types 23JS6A and 31JS6A are identical with type 6JS6C except for heater ratings.



12FY

|                               |      |      |      |         |
|-------------------------------|------|------|------|---------|
| Heater Voltage (ac/dc)        | 6.3  | 23.6 | 31.5 | volts   |
| Heater Current                | 2.25 | 0.6  | 0.45 | amperes |
| Heater Warm-up Time (Average) | —    | 11   | 11   | seconds |

Heater-Cathode Voltage:

|                     |          |          |          |       |
|---------------------|----------|----------|----------|-------|
| Peak value .....    | ±200 max | ±200 max | ±200 max | volts |
| Average value ..... | 100 max  | 100 max  | 100 max  | volts |

Direct Interelectrode Capacitances:

|  |     |    |
|--|-----|----|
| Grid No.1 to Plate .....                                     | 0.7 | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 24  | pF |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 10  | pF |

Class A<sub>1</sub> Amplifier

| CHARACTERISTICS   | Triode†† Connection            |      | Pentode Connection |       |       |
|---|--------------------------------|------|--------------------|-------|-------|
|   | 125                            | 5000 | 60                 | 175   |       |
| Plate Voltage .....   | Connected to cathode at socket |      |                    |       | volts |
| Grid No.3 (Suppressor Grid) .....                           | 125                            | 125  | 125                | 125   | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                       | -25                            | —    | 0                  | -25   | volts |
| Grid-No.1 (Control-Grid) Voltage .....                      | —                              | —    | —                  | —     | ohms  |
| Plate Resistance (Approx.) .....                            | —                              | —    | —                  | 5500  | ohms  |
| Transconductance .....                                      | —                              | —    | —                  | 11500 | μmhos |
| Plate Current .....   | —                              | —    | 600†               | 130   | mA    |
| Grid-No.2 Current .....                                     | —                              | —    | 32†                | 2.8   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA ..... | —                              | -125 | —                  | -54   | volts |
| Triode Amplification Factor .....                           | 3                              | —    | —                  | —     |       |

† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

†† Grid No.2 connected to plate.

Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

MAXIMUM RATINGS (Design-Maximum Values)


|   |      |       |
|---|------|-------|
| DC Plate Supply Voltage .....               | 990  | volts |
| Peak Positive-Pulse Plate Voltage# .....    | 7500 | volts |
| Peak Negative-Pulse Plate Voltage .....     | 1200 | volts |
| DC Grid-No.3 Voltage .....                  | 75   | volts |
| DC Grid-No.2 Voltage .....                  | 220  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Average Cathode Current .....               | 350  | mA    |
| Peak Cathode Current .....                  | 1200 | mA    |
| Plate Dissipation** .....                   | 30   | watts |
| Grid-No.2 Input .....                       | 5.5  | watts |
| Bulb Temperature (At hottest point) .....   | 225  | °C    |

MAXIMUM CIRCUIT VALUE

|  |      |         |
|--|------|---------|
| Grid-No.1-Circuit Resistance               |      |         |
| For grid bias feedback HV regulation ..... | 0.47 | megohm  |
| For dc or pulse shunt HV regulation .....  | 10   | megohms |

# Pulse duration must not exceed 15% of one horizontal scanning cycle (10 microseconds).

\*\* A bias resistor or other means is required to protect the tube in absence of excitation.

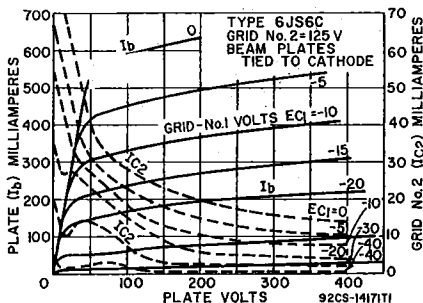

Refer to chart at end of section.


6J76

**6JT6A**

12JT6A, 17JT6A

**BEAM POWER TUBE**

Novar types used as horizontal-deflection amplifiers in high-efficiency deflection circuits of black-and-white television receivers employing wide-angle or high-voltage picture tubes. Outlines section, 31A; requires novar 9-contact socket. Types 12JT6A and 17JT6A are identical with type 6JT6A except for heater ratings.

**9QU**

|  | 6JT6A    | 12JT6A   | 17JT6A   |         |
|--|----------|----------|----------|---------|
| Heater Voltage (ac/dc)                                 | 6.3      | 12.6     | 16.8     | volts   |
| Heater Current   | 1.2      | 0.6      | 0.45     | amperes |
| Heater Warm-up Time (Average)                          | —        | 11       | 11       | seconds |
| Heater-Cathode Voltage:                                |          |          |          |         |
| Peak value   | ±200 max | ±200 max | ±200 max | volts   |
| Average value  | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                    |          |          |          |         |
| Grid No.1 to Plate                                     | —        | —        | 0.26     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | —        | —        | 15       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | —        | —        | 6.5      | pF      |

**Class A<sub>1</sub> Amplifier**

|   | Pentode Connection | Triode* Connection             |       |       |
|---|--------------------|--------------------------------|-------|-------|
| Plate Voltage   | 60                 | 250                            | 150   | volts |
| Grid-No.3 (Suppressor Grid)                           | —                  | Connected to cathode at socket |       |       |
| Grid-No.2 (Screen-Grid) Voltage                       | 150                | 150                            | 150   | volts |
| Grid-No.1 (Control-Grid) Voltage                      | 0                  | -22.5                          | -22.5 | volts |
| Triode Amplification Factor                           | —                  | —                              | 4.4   |       |
| Plate Resistance (Approx.)                            | —                  | 15000                          | —     | ohms  |
| Transconductance                                      | —                  | 7100                           | —     | μmhos |
| Plate Current   | 390 <sup>a</sup>   | 70                             | —     | mA    |
| Grid-No.2 Current                                     | 32 <sup>a</sup>    | 2.1                            | —     | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | —                  | -42                            | —     | volts |

\* Grid No.2 connected to plate.


<sup>a</sup> This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| DC Plate Supply Voltage                   | 770  | volts |
| Peak Positive-Pulse Plate Voltage         | 6500 | volts |
| Peak Negative-Pulse Plate Voltage         | 1500 | volts |
| DC Grid-No.3 Voltage <sup>a</sup>         | 70   | volts |
| DC Grid-No.2 Voltage                      | 220  | volts |
| DC Grid-No.1 Voltage, Negative-bias value | 55   | volts |
| Peak Negative-Pulse Grid-No.1 Voltage     | 330  | volts |

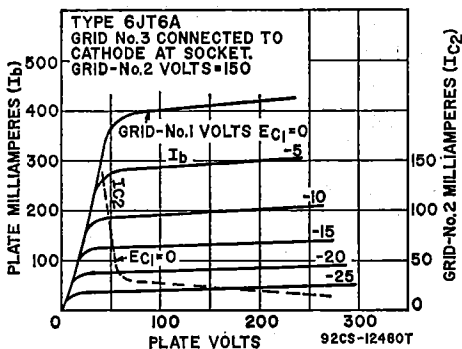



|   |      |       |
|---|------|-------|
| Peak Cathode Current .....                | 550  | mA    |
| Average Cathode Current .....             | 175  | mA    |
| Plate Dissipation† .....                  | 17.5 | watts |
| Grid-No.2 Input .....                     | 3.5  | watts |
| Bulb Temperature (At hottest point) ..... | 240  | °C    |

**MAXIMUM CIRCUIT VALUE**

Grid-No.1-Circuit Resistance, for grid-resistor-bias operation ..... 1 megohm

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).


▲ A positive voltage may be applied to grid No.3 to reduce interference from "snivets" which may occur in television receivers. A typical value for this voltage is 30 volts.

† A bias resistor or other means is required to protect the tube in absence of excitation.

**HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6JT8**

10JT8



9DX

Neonovial type with frame-grid pentode unit used in color and black-and-white television receivers. The triode unit is used as a voltage-amplifier or sync-separator tube, and the pentode unit is used as a video-amplified tube. Outlines section, 10A, except base is small-button miniature 9-pin; requires miniature 9-contact socket. Type 10JT8 is identical with type 6JT8 except for heater ratings.

|                                     |             |              |         |
|-------------------------------------|-------------|--------------|---------|
|                                     | <b>6JT8</b> | <b>10JT8</b> |         |
| Heater Voltage (ac/dc) .....        | 6.3         | 10.2         | volts   |
| Heater Current .....                | 0.725       | 0.45         | ampere  |
| Heater Warm-up Time (Average) ..... | —           | 11           | seconds |
| Heater-Cathode Voltage:             |             |              |         |
| Peak value .....                    | ±200 max    | ±200 max     | volts   |
| Average value .....                 | 100 max     | 100 max      | volts   |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |                    |                     |       |
|---|--------------------|---------------------|-------|
|   | <b>Triode Unit</b> | <b>Pentode Unit</b> |       |
| Plate Voltage .....   | 330                | 330                 | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —                  | 330                 | volts |
| Grid-No.2 Voltage .....                                     | —                  | See curve page 300  |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | 0                   | volts |
| Plate Dissipation .....                                     | 1                  | 4                   | watts |
| Grid-No.2 Input:  |                    |                     |       |
| For grid-No.2 voltages up to 165 volts .....                | —                  | 1.1                 | watts |
| For grid-No.2 voltages between 165 and 330 volts .....      | —                  | See curve page 300  |       |


**CHARACTERISTICS**

|   |       |     |       |       |
|---|-------|-----|-------|-------|
| Plate Supply Voltage .....                                    | 250   | 50  | 200   | volts |
| Grid-No.2 Supply Voltage .....                                | —     | 100 | 100   | volts |
| Grid-No.1 Voltage .....                                       | -2    | 0   | —     | volts |
| Cathode-Bias Resistor .....                                   | —     | —   | 82    | ohms  |
| Amplification Factor .....                                    | 100   | —   | —     |       |
| Plate Resistance (Approx.) .....                              | 37000 | —   | 50000 | ohms  |
| Transconductance .....  | 2700  | —   | 20000 | µmhos |
| Plate Current .....   | 1.5   | 55* | 17    | mA    |
| Grid-No.2 Current .....                                       | —     | 18* | 3.5   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µA ..... | —     | —   | -5    | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µA .....  | -5.3  | —   | —     | volts |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |      |        |
|----------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance:    |     |      |        |
| For fixed-bias operation .....   | 0.5 | 0.25 | megohm |
| For cathode-bias operation ..... | 1   | 1    | megohm |

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.



9QL

**BEAM POWER TUBE**

**6JU6**

22JU6

Novar type used as horizontal-deflection amplifier in color television receivers. Outlines section, 18A; requires novar 9-contact socket. Type 22JU6 is identical with type 6JU6 except for heater ratings.

|  | 6JU6     | 22JU6    |         |
|--|----------|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | 20       | volts   |
| Heater Current .....   | 1.6      | 0.45     | amperes |
| Heater Warm-up Time .....                                    | —        | 11       | seconds |
| Heater-Cathode Voltage:                                      |          |          |         |
| Peak value .....   | ±200 max | ±200 max | volts   |
| Average value .....  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                          |          |          |         |
| Grid No.1 to Plate .....                                     |          | 1.2      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |          | 22       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |          | 9        | pF      |

### Class A<sub>1</sub> Amplifier

| CHARACTERISTICS                                   | Triode† Connection |      | Pentode Connection             |       |       |
|---|--------------------|------|--------------------------------|-------|-------|
|   | 125                | —    | 50                             | 130   |       |
| Plate Voltage .....                               | —                  | 6500 | —                              | —     | volts |
| Peak Positive-Pulse Plate Voltage# .....          | —                  | —    | —                              | —     | volts |
| Grid No.3 (Suppressor Grid) .....                 | —                  | —    | Connected to cathode at socket | —     |       |
| Grid-No.2 (Screen-Grid) Voltage .....             | 125                | 125  | 125                            | 125   | volts |
| Grid-No.1 (Control-Grid) Voltage .....            | -20                | —    | 0                              | -20   | volts |
| Amplification Factor .....                        | 4.7                | —    | —                              | —     |       |
| Plate Resistance (Approx.) .....                  | —                  | —    | —                              | 18000 | ohms  |
| Transconductance .....                            | —                  | —    | —                              | 7000  | μmhos |
| Plate Current .....                               | —                  | —    | 470††                          | 45    | mA    |
| Grid-No.2 Current .....                           | —                  | —    | 32††                           | 1.5   | mA    |
| Grid-No.1 Voltage for plate current of 1 mA ..... | —                  | -75  | —                              | -32   | volts |

### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |      |       |
|---|------|-------|
| DC Plate Supply Voltage .....                   | 770  | volts |
| Peak Positive-Pulse Plate Voltage# .....        | 6500 | volts |
| Peak Negative-Pulse Plate Voltage .....         | 1500 | volts |
| DC Grid-No.3 Voltage** .....                    | 75   | volts |
| DC Grid-No.2 Voltage .....                      | 220  | volts |
| DC Grid-No.1 Voltage, Negative-bias value ..... | 55   | volts |
| Peak Negative Pulse Grid-No.1 Voltage .....     | 330  | volts |
| Peak Cathode Current .....                      | 950  | mA    |
| Average Cathode Current .....                   | 275  | mA    |
| Grid-No.2 Input .....                           | 3.5  | watts |
| Plate Dissipation** .....                       | 17   | watts |
| Bulb Temperature (At hottest point) .....       | 240  | °C    |

#### MAXIMUM CIRCUIT VALUES

|  |      |         |
|--|------|---------|
| Grid-No.1-Circuit Resistance:          |      |         |
| For grid-resistor-bias operation ..... | 0.47 | megohm  |
| For plate-pulsed operation .....       | 10   | megohms |



# Pulse duration must not exceed 15% of one horizontal scanning cycle (10 microseconds).

† Grid No.2 connected to plate.

†† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.


\* In this service, a positive value may be applied to grid No.3 to minimize "snivets" interference; a typical value for this voltage is 30 volts.

\*\* A bias resistor or other means is required to protect the tube in absence of excitation.

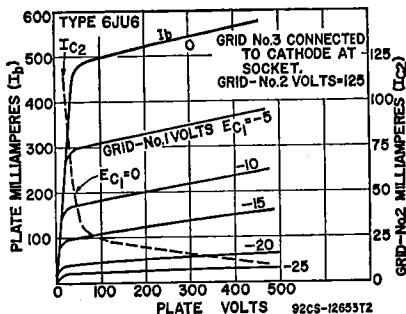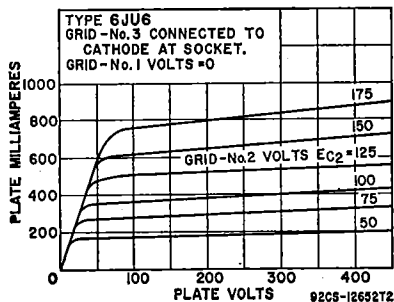

Refer to chart at end of section.

6JU8



9PQ

QUADRUPLE DIODE

6JU8A

8JU8A


Miniature type used in phase-detector and noise-immune color-killer circuits of color television receivers, and in bridge-matrixing circuits in FM stereo multiplex equipment. Outlines section, 6B; requires miniature 9-contact socket. Units 1 and 2 are shielded from units 3 and 4 to minimize coupling between the series-connected pairs of diodes. Type 8JU8A is identical with type 6JU6A except for heater ratings.

|   |          |          |         |
|---|----------|----------|---------|
| Heater Voltage (ac/dc)  | 6JU8A    | 8JU8A    |         |
| Heater Current  | 6.3      | 8.4      | volts   |
| Heater Warm-up Time   | 0.6      | 0.45     | ampere  |
| Peak Heater-Cathode Voltage   | —        | 11       | seconds |
| Direct Interelectrode Capacitances (Approx.):                       | ±300 max | ±300 max | volts   |
| Plate of Unit No.1 and Cathode of Unit No.2 to Cathode of Unit No.1 |          | 1.8      | pF      |
| Plate of Unit No.1 and Cathode of Unit No.2 to Plate of Unit No.2   |          | 2.2      | pF      |
| Plate of Unit No.2 to Heater and Internal Shield                    |          | 0.62     | pF      |
| Plate of Unit No.3 and Cathode of Unit No.4 to Cathode of Unit No.3 |          | 1.9      | pF      |
| Plate of Unit No.3 and Cathode of Unit No.4 to Plate of Unit No.4   |          | 2.2      | pF      |
| Plate of Unit No.4 to Heater and Internal Shield                    |          | 0.94     | pF      |
| Cathode of Unit No.1 to Heater and Internal Shield                  |          | 1.8      | pF      |
| Cathode of Unit No.3 to Heater and Internal Shield                  |          | 1.9      | pF      |
| <b>MAXIMUM RATINGS (Design-Center Values, Each Diode Unit)</b>      |          |          |         |
| Peak Inverse Plate Voltage  |          | 300      | volts   |
| Peak Plate Current  |          | 54       | mA      |
| Average Output Current  |          | 9        | mA      |
| <b>CHARACTERISTIC, Instantaneous Value (Each Unit)</b>              |          |          |         |
| Plate Current for plate voltage of 10 volts                         |          | 60       | mA      |

HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE

6JV8

8JV8



9DX

Miniature type used in television receiver applications, particularly those having low-voltage "B" supplies. The triode unit is used in sound-if, keyed-agc, sync-separator, sync-amplifier, and noise-suppression circuits. The pentode unit is especially useful as a video amplifier tube. Outlines section, 6E; requires miniature 9-contact socket. Type 8JV8 is identical with type 6JV8 except for heater ratings.

|   |          |          |         |
|---|----------|----------|---------|
| Heater Voltage (ac/dc)  | 6JV8     | 8JV8     |         |
| Heater Current  | 6.3      | 8.5      | volts   |
| Heater Warm-up Time (Average)   | 0.6      | 0.45     | ampere  |
| Heater-Cathode Voltage:   | 11       | 11       | seconds |
| Peak value  | ±200 max | ±200 max | volts   |
| Average value   | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):                           |          |          |         |
| Triode Unit:  |          |          |         |
| Grid to Plate   |          | 2.2      | pF      |
| Grid to Cathode and Heater  |          | 3        | pF      |
| Plate to Cathode and Heater   |          | 2        | pF      |
| Pentode Unit:   |          |          |         |
| Grid No.1 to Plate  |          | 0.08 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield |          | 8        | pF      |

|   |           |    |
|---|-----------|----|
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 3.2       | pF |
| Pentode Grid No.1 to Triode Plate .....                                   | 0.012 max | pF |
| Pentode Plate to Triode Plate .....                                       | 0.24 max  | pF |

**Class A<sub>1</sub> Amplifier**


| MAXIMUM RATINGS (Design-Maximum Values) |  | Triode Unit | Pentode Unit |       |
|---|--|-------------|--------------|-------|
| Plate Voltage .....                     |  | 330         | 330          | volts |
| Grid-No.2 (Screen-Grid) Voltage .....   |  | —           | 330          | volts |
| Grid-No.1 (Control-Grid) Voltage:       |  |             |              |       |
| Positive-bias value .....               |  | 0           | 0            | volts |
| Negative-bias value .....               |  | 50          | 50           | volts |
| Plate Dissipation .....                 |  | 1.1         | 4            | watts |
| Grid-No.2 Input .....                   |  | —           | 1.7          | watts |

| CHARACTERISTIC   | Triode Unit | Pentode Unit |       |       |        |
|--|-------------|--------------|-------|-------|--------|
| Plate Voltage .....  | 200         | 60           | 125   | 200   | volts  |
| Grid-No.2 Voltage .....                                      | —           | 200          | 125   | 200   | volts  |
| Grid-No.1 Voltage .....                                      | —2          | 0            | —1    | —2.9  | volts  |
| Amplification Factor .....                                   | 70          | —            | —     | —     |        |
| Plate Resistance (Approx.) .....                             | 0.0175      | —            | 0.1   | 0.15  | megohm |
| Transconductance .....                                       | 4000        | —            | 11500 | 10700 | μmhos  |
| Plate Current .....  | 4           | 51*          | 22    | 22    | mA     |
| Grid-No.2 Current .....                                      | —           | 14*          | 4     | 4     | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA ..... | —5          | —            | —5.5  | —9    | volts  |

**MAXIMUM CIRCUIT VALUES**

|                                  |  |     |      |        |
|----------------------------------|--|-----|------|--------|
| Grid-No.1-Current Resistance:    |  |     |      |        |
| For fixed-bias operation .....   |  | 0.5 | 0.25 | megohm |
| For cathode-bias operation ..... |  | 1   | 1    | megohm |

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

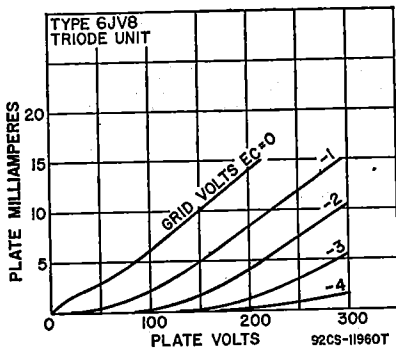


**6JW8/  
ECF802**

5JW8  
6LX8/LCF802  
9JW8/PCF802

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used as horizontal-oscillator and frequency-control tube in color and black-and-white television receivers. Outlines section, 6B; requires miniature 9-contact socket. Types 5JW8, 6LX8/LCF802 and 9JW8/PCF802 are identical with type 6JW8/ECF802 except for heater ratings.



9AE

|                                     | 5JW8     | 6JW8/<br>ECF802 | 6LX8/<br>LCF802 | 9JW8/<br>PCF802 |         |
|-------------------------------------|----------|-----------------|-----------------|-----------------|---------|
| Heater Voltage (ac/dc) ..           | 4.7      | 6.3             | 6               | 9               | volts   |
| Heater Current .....                | 0.6      | 0.43            | 0.45            | 0.3             | ampere  |
| Heater Warm-up Time (Average) ..... | 11       | —               | —               | —               | seconds |
| Heater-Cathode Voltage:             |          |                 |                 |                 |         |
| Peak value .....                    | ±200 max | ±200 max        | ±200 max        | ±200 max        | volts   |
| Average value .....                 | 100 max  | 100 max         | 100 max         | 100 max         | volts   |

Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values) | Triode Unit | Pentode Unit |       |
|---|-------------|--------------|-------|
| Plate Supply Voltage                    | 550         | 550          | volts |
| Plate Voltage                           | 250         | 250          | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage  | —           | 550          | volts |
| Grid-No.2 Voltage                       | —           | 250          | volts |
| Peak Cathode Current*                   | —           | 50           | mA    |
| Cathode Current                         | 10          | 15           | mA    |
| Plate Dissipation                       | 1.4         | 1.2          | watts |
| Grid-No.2 Input                         | —           | 0.8          | watts |
| Input Impedance at 60 Hz                | 50          | 300          | kohms |

CHARACTERISTICS

|   |      |      |        |
|---|------|------|--------|
| Plate Voltage   | 200  | 100  | volts  |
| Grid-No.2 Voltage   | —    | 100  | volts  |
| Grid-No.1 (Control-Grid) Voltage  | -2   | -1   | volts  |
| Mu Factor, Grid-No.1 to Grid-No.2                                       | —    | 47   |        |
| Amplification Factor  | 70   | —    |        |
| Input Resistance  | 0.2  | 0.4  | megohm |
| Transconductance  | 3500 | 5500 | μmhos  |
| Plate Current   | 3.5  | 6    | mA     |
| Grid-No.2 Current   | —    | 1.7  | mA     |
| Plate Current:  |      |      |        |
| For grid-No.1 voltage of 0 volts  | —    | 12.5 | mA     |
| For grid current of 10 μA   | 10   | —    | mA     |
| Grid-No.2 Current for grid-No.1 voltage of 0 volts                      | —    | 3.5  | mA     |
| Grid-No.1 Voltage:  |      |      |        |
| For grid-No.1 current of +0.3 μA  | -1.3 | -1.3 | volts  |
| For plate and grid-No.2 voltage of 200 volts and plate current of 10 μA | —    | -16  | volts  |


MAXIMUM CIRCUIT VALUES

|                               |   |      |         |
|-------------------------------|---|------|---------|
| Grid-No.1-Circuit Resistance: |   |      |         |
| For fixed-bias operation      | — | 0.56 | megohm  |
| For cathode-bias operation    | 3 | 1    | megohms |

\* With a maximum duty factor of 0.30 and maximum pulse duration of 30 microseconds.

Refer to chart at end of section.

6JZ6



12DZ

heater ratings.

MEDIUM-MU TRIODE—  
POWER PENTODE

6JZ8

13JZ8, 17JZ8, 24JZ8,  
25JZ8

Duodeca type used in combined vertical-deflection-oscillator and vertical-deflection-amplifier applications in television receivers. Outlines section, 8C; requires duodeca 12-contact socket. Types 13JZ8, 17JZ8, 24JZ8, and 25JZ8 are identical with type 6JZ8 except for

|                         | 6JZ8     | 13JZ8    | 17JZ8    | 24JZ8    | 25JZ8    |         |
|-------------------------|----------|----------|----------|----------|----------|---------|
| Heater Voltage (ac/dc)  | 6.3      | 12.7     | 16.8     | 24.2     | 25.2     | volts   |
| Heater Current          | 1.2      | 0.6      | 0.45     | 0.315    | 0.3      | amperes |
| Heater Warm-up Time     | —        | 11       | 11       | 11       | —        | seconds |
| Heater-Cathode Voltage: |          |          |          |          |          |         |
| Peak value              | ±200 max | ±200 max | ±200 max | ±200 max | ±200 max | volts   |
| Average value           | 100 max  | 100 max  | 100 max  | 100 max  | 100 max  | volts   |

Class A<sub>1</sub> Amplifier

| CHARACTERISTICS  | Triode Unit | Beam Power Unit |       |       |
|--|-------------|-----------------|-------|-------|
| Plate Voltage  | 150         | 45              | 120   | volts |
| Grid-No.2 (Screen-Grid) Voltage                        | —           | 110             | 110   | volts |
| Grid-No.1 (Control-Grid) Voltage                       | -5          | 0               | -8    | volts |
| Amplification Factor                                   | 20          | —               | —     |       |
| Plate Resistance (Approx.)                             | 8500        | —               | 11700 | ohms  |
| Transconductance                                       | 2350        | —               | 7100  | μmhos |
| Plate Current  | 5.5         | 122*            | 46    | mA    |
| Grid-No.2 Current                                      | —           | 16.5*           | 3.5   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | -10         | —               | —     | volts |

Grid-No.1 Voltage (Approx.) for plate current of 100  $\mu$ A ..... — — —25 volts

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

### Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system

|  | Triode Unit<br>Oscillator | Beam Power Unit<br>Amplifier |       |
|--|---------------------------|------------------------------|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b> |                           |                              |       |
| DC Plate Voltage                               | 250                       | 250                          | volts |
| Peak Positive-Pulse Plate Voltage#             | —                         | 2000                         | volts |
| DC Grid-No.2 Voltage                           | —                         | 200                          | volts |
| Peak Negative-Pulse Grid-No.1 Voltage          | 400                       | 150                          | volts |
| Peak Cathode Current                           | 70                        | 245                          | mA    |
| Average Cathode Current                        | 20                        | 70                           | mA    |
| Plate Dissipation*                             | 1                         | 7                            | watts |
| Grid-No.2 Input                                | —                         | 1.8                          | watts |

#### MAXIMUM CIRCUIT VALUES

|                               |     |     |         |
|-------------------------------|-----|-----|---------|
| Grid-No.1-Circuit Resistance: |     |     |         |
| For fixed-bias operation      | 1   | 1   | megohm  |
| For cathode-bias operation    | 2.2 | 2.2 | megohms |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

\* A bias resistor or other means is required to protect the tube in absence of excitation.


**6K5GT**

Refer to chart at end of section.

**6K6GT**

### POWER PENTODE

Glass octal type used in output stage of radio receivers and, triode-connected, as a vertical-deflection amplifier in television receivers. This type may be supplied with pin No.1 omitted. Outlines section, 13D; requires octal socket. This tube, like other power-handling tubes, should be adequately ventilated.



**7S**

|  |               |        |
|--|---------------|--------|
| Heater Voltage (ac/dc)                                 | 6.3           | volts  |
| Heater Current   | 0.4           | ampere |
| Heater-Cathode Voltage:                                |               |        |
| Peak value   | $\pm 200$ max | volts  |
| Average value  | 100 max       | volts  |
| Direct Interelectrode Capacitances (Approx.):          |               |        |
| Grid No.1 to Plate                                     | 0.5           | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 5.5           | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | 6             | pF     |

#### Class A<sub>1</sub> Amplifier

|  |     |       |  |
|--|-----|-------|--|
| <b>MAXIMUM RATING (Design-Center Values)</b> |     |       |  |
| Plate Voltage                                | 315 | volts |  |
| Grid-No.2 (Screen-Grid) Voltage              | 285 | volts |  |
| Plate Dissipation                            | 8.5 | watts |  |
| Grid-No.2 Input                              | 2.8 | watts |  |

#### TYPICAL OPERATION

|                                  |        |       |        |            |
|----------------------------------|--------|-------|--------|------------|
| Plate Voltage                    | 100    | 250   | 315    | volts      |
| Grid-No.2 Voltage                | 100    | 250   | 250    | volts      |
| Grid-No.1 (Control-Grid) Voltage | -7     | -18   | -21    | volts      |
| Peak AF Grid-No.1 Voltage        | 7      | 18    | 21     | volts      |
| Zero-Signal Plate Current        | 9      | 32    | 25.5   | mA         |
| Maximum-Signal Plate Current     | 9.5    | 33    | 28     | mA         |
| Zero-Signal Grid-No.2 Current    | 1.6    | 5.5   | 4.0    | mA         |
| Maximum-Signal Grid-No.2 Current | 3      | 10    | 9      | mA         |
| Plate Resistance (Approx.)       | 104000 | 90000 | 110000 | ohms       |
| Transconductance                 | 1500   | 2300  | 2100   | $\mu$ mhos |
| Load Resistance                  | 12000  | 7600  | 9000   | ohms       |
| Total Harmonic Distortion        | 11     | 11    | 15     | per cent   |
| Maximum-Signal Power Output      | 0.35   | 3.4   | 4.5    | watts      |

**TYPICAL PUSH-PULL OPERATION** (Values are for two tubes)

|  | Fixed Bias | Cathode Bias |          |
|--|------------|--------------|----------|
| Plate Supply Voltage                       | 285        | 285          | volts    |
| Grid-No.2 Supply Voltage                   | 285        | 285          | volts    |
| Grid-No.1 Voltage                          | -25.5      | —            | volts    |
| Cathode-Bias Resistor                      | —          | 400          | ohms     |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage     | 51         | 51           | volts    |
| Zero-Signal Plate Current                  | 55         | 55           | mA       |
| Maximum-Signal Plate Current               | 72         | 61           | mA       |
| Zero-Signal Grid-No.2 Current              | 9          | 9            | mA       |
| Maximum-Signal Grid-No.2 Current           | 17         | 13           | mA       |
| Effective Load Resistance (Plate-to-plate) | 12000      | 12000        | ohms     |
| Total Harmonic Distortion                  | 6          | 4            | per cent |
| Maximum-Signal Power Output                | 10.5       | 9.8          | watts    |

**CHARACTERISTICS (Triode Connection)\***

|   |      |       |
|---|------|-------|
| Plate Voltage   | 250  | volts |
| Grid-No.1 Voltage                                       | -18  | volts |
| Plate Current   | 37.5 | mA    |
| Transconductance  | 2700 | μmhos |
| Amplification Factor                                    | 6.8  |       |
| Plate Resistance (Approx.)                              | 2500 | ohms  |
| Grid-No.1 Voltage (Approx.) for plate current of 0.5 mA | -48  | volts |

**MAXIMUM CIRCUIT VALUES**

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |

\* Grid-No.2 connected to plate.

**Vertical Deflection Amplifier (Triode Connection)\***

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS**

|   |       |       |
|---|-------|-------|
| DC Plate Voltage                                      | 315   | volts |
| Peak Positive-Pulse Plate Voltage# (Absolute maximum) | 1200° | volts |
| Peak Negative-Pulse Grid-No.1 Voltage                 | 250   | volts |
| Peak Cathode Current                                  | 75    | mA    |
| Average Cathode Current                               | 25    | mA    |
| Plate Dissipation                                     | 7     | watts |

**MAXIMUM CIRCUIT VALUE**

|  |     |         |
|--|-----|---------|
| Grid-No.1-Circuit Resistance, for cathode-bias operation | 2.2 | megohms |
|--|-----|---------|

\* Grid No.2 connected to plate.

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

° Under no circumstances should this absolute value be exceeded.

Refer to chart at end of section.

**6K7  
6K7G  
6K7GT**

Refer to chart at end of section.

**6K8  
6K8G  
6K8GT**

Refer to chart at end of section.


**6K11  
6K11/6Q11**

**6KA8**

8KA8

**HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used in color and black-and-white television receivers. The triode unit is used in sync-separator circuits; the pentode unit has two independent control grids and is used in gated-agc-amplifier and noise-inverter circuits. Outlines section, 6E; requires miniature 9-contact socket. For curves of average plate characteristics for triode unit, refer to type 6AW8A. Type 8KA8 is identical with type 6KA8 except for heater ratings.



9PV

|   | 6KA8     | 8KA8     |         |
|---|----------|----------|---------|
| Heater Voltage (ac/dc)  | 6.3      | 8.4      | volts   |
| Heater Current  | 0.6      | 0.45     | ampere  |
| Heater Warm-up Time (Average)   | 11       | 11       | seconds |
| <b>Heater-Cathode Voltage:</b>  |          |          |         |
| Peak value  | ±200 max | ±200 max | volts   |
| Average value   | 100 max  | 100 max  | volts   |
| <b>Direct Interelectrode Capacitances:</b>                              |          |          |         |
| <b>Triode Unit:</b>   |          |          |         |
| Grid to Plate   |          | 2.2      | pF      |
| Grid to Cathode, Heater, and Internal Shield                            |          | 2.8      | pF      |
| Plate to Cathode, Heater, and Internal Shield                           |          | 2.2      | pF      |
| <b>Pentode Unit:</b>  |          |          |         |
| Grid No.1 to Plate  |          | 0.1 max  | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield |          | 9.5      | pF      |
| Grid No.1 to Grid No.3  |          | 0.5      | pF      |
| Grid No.3 to Plate  |          | 2.2      | pF      |
| Grid No.3 to All Other Electrodes, Heater, and Internal Shield          |          | 7        | pF      |

**Class A<sub>1</sub> Amplifier**

|   | Triode Unit |              |        |
|---|-------------|--------------|--------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>                |             |              |        |
| Plate Voltage   | 300         |              | volts  |
| Grid Voltage:   |             |              |        |
| Positive-bias value   | 0           |              | volts  |
| Negative-bias value   | 50          |              | volts  |
| Plate Dissipation   | 1.1         |              | watts  |
| <b>CHARACTERISTICS</b>  |             |              |        |
|   | Triode Unit | Pentode Unit |        |
| Plate Supply Voltage  | 200         | 150          | volts  |
| Grid-No.3 Supply Voltage                                      | —           | 0            | volts  |
| Grid-No.2 Supply Voltage                                      | —           | 100          | volts  |
| Grid-No.1 Supply Voltage                                      | -2          | 0            | volts  |
| Cathode-Bias Resistor   | —           | 180          | ohms   |
| Amplification Factor  | 70          | —            |        |
| Plate Resistance (Approx.)                                    | 17500       | 100000       | ohms   |
| Transconductance, Grid No.1 to Plate                          | 4000        | 4400         | μmhos  |
| Transconductance, Grid No.3 to Plate                          | —           | 600          | μmhos  |
| Plate Current   | 4           | 4            | mA     |
| Grid-No.2 Current   | —           | 2.8          | mA     |
| Grid-No.1 Supply Voltage (Approx.):                           |             |              |        |
| For plate current of 10 μA                                    | -5          | —            | volts  |
| For plate current of 20 μA                                    | —           | -4           | volts  |
| Grid No.3 Supply Voltage (Approx.) for plate current of 20 μA | —           | -7           | volts  |
| <b>MAXIMUM CIRCUIT VALUES</b>                                 |             |              |        |
|   | Triode Unit |              |        |
| Grid-Circuit Resistance:                                      |             |              |        |
| For fixed-bias operation                                      | 0.25        |              | megohm |
| For cathode-bias operation                                    | 1           |              | megohm |

**Gated AGC Amplifier and Noise Inverter**

|  | Pentode Unit       |  |       |
|--|--------------------|--|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b> |                    |  |       |
| DC Plate Voltage                               | 300                |  | volts |
| Peak Positive-Pulse Plate Voltage#             | 600                |  | volts |
| Grid-No.3 (Control-Grid) Voltage:              |                    |  |       |
| Positive-bias value                            | 0                  |  | volts |
| Negative-bias value                            | -100               |  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage         | 300                |  | volts |
| Grid-No.2 Voltage                              | See curve page 300 |  |       |
| Grid-No.1 (Control-Grid) Voltage:              |                    |  |       |
| Positive-bias value                            | 0                  |  | volts |
| Negative-bias value                            | -50                |  | volts |






|  |                    |       |
|--|--------------------|-------|
| Plate Dissipation .....                                | 2                  | watts |
| Grid-No.2 Input:                                       |                    |       |
| For grid-No.2 voltages up to 150 volts .....           | 1.1                | watts |
| For grid-No.2 voltages between 150 and 300 volts ..... | See curve page 300 |       |

**MAXIMUM CIRCUIT VALUES**

|                                    |      |        |
|------------------------------------|------|--------|
| Grid-No.3-Circuit Resistance ..... | 0.68 | megohm |
| Grid-No.1-Circuit Resistance:      |      |        |
| For fixed-bias operation .....     | 0.5  | megohm |
| For cathode-bias operation .....   | 1    | megohm |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

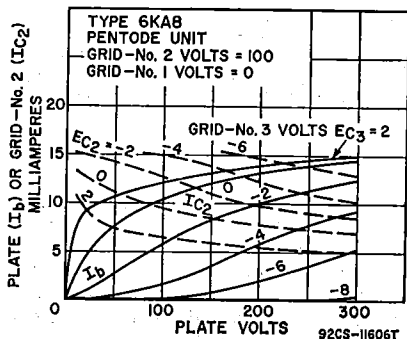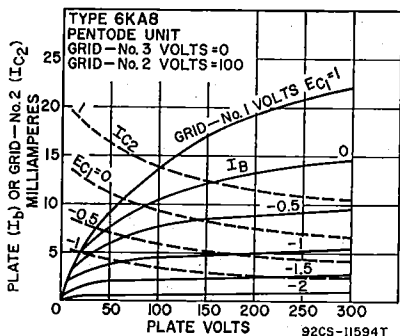

12GW

**BEAM POWER TUBE**

**6KD6**

30KD6, 36KD6/40KD6

Duodecar type used as horizontal-deflection amplifier in television receivers. Outlines section, 16C; requires duodecar 12-contact socket. Types 30KD6 and 36KD6/40KD6 are identical with type 6KD6 except for heater ratings.

|  | 6KD6     | 30KD6    | 36KD6/40KD6 |         |
|--|----------|----------|-------------|---------|
| Heater Voltage .....   | 6.3      | 30       | 36          | volts   |
| Heater Current .....   | 2.85     | 0.6      | 0.45        | amperes |
| Heater Warm-up Time .....                                    | —        | 11       | 11          | seconds |
| Heater-Cathode Voltage:                                      |          |          |             |         |
| Peak value .....   | ±200 max | ±200 max | ±200 max    | volts   |
| Average value .....  | 100 max  | 100 max  | 100 max     | volts   |
| Direct Interelectrode Capacitances:                          |          |          |             |         |
| Grid No.1 to Plate .....                                     |          |          | 0.8         | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |          |          | 40          | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No. 3 .....    |          |          | 16          | pF      |

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| DC Plate Supply Voltage .....               | 990  | volts |
| Peak Positive-Pulse Plate Voltage# .....    | 7000 | volts |
| Positive DC Grid-No.3 Voltage .....         | 20   | volts |
| Grid-No.2 Voltage .....                     | 200  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 250  | volts |
| Peak Cathode Current .....                  | 1400 | mA    |
| Average Cathode Current .....               | 400  | mA    |
| Plate Dissipation# .....                    | 33   | watts |
| Grid-No.2 Input .....                       | 5    | watts |
| Bulb Temperature (At hottest point) .....   | 225  | °C    |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|                                   | Triode†<br>Connection | Pentode<br>Connection          |     |
|-----------------------------------|-----------------------|--------------------------------|-----|
| Plate Voltage .....               | 150                   | 60                             | 150 |
| Grid No.3 (Suppressor Grid) ..... |                       | Connected to cathode at socket |     |

|   |       |       |       |       |
|---|-------|-------|-------|-------|
| Grid-No.2 (Screen-Grid) Voltage                         | 150   | 110   | 110   | volts |
| Grid-No.1 (Control-Grid) Voltage                        | -22.5 | 0     | -22.5 | volts |
| Amplification Factor                                    | 4     | —     | —     |       |
| Plate Resistance (Approx.)                              | —     | —     | 6000  | ohms  |
| Transconductance  | —     | —     | 14000 | μmhos |
| Plate Current   | —     | 750** | 120   | mA    |
| Grid-No.2 Current                                       | —     | 42**  | 1.8   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1.0 μA | —     | —     | -40   | volts |

**MAXIMUM CIRCUIT VALUE**

|                              |      |         |
|------------------------------|------|---------|
| Grid-No.1-Circuit Resistance | 2.2  | megohms |
| Grid-No.3-Circuit Resistance | 0.01 | megohm  |

\* A bias resistor or other means is required to protect the tube in absence of excitation.  
 # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

† Grid-No.2 connected to plate at socket.

\*\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**6KD8**


For replacement use type 6U8A/6KD8.

**6KE8**

4KE8, 5KE8

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type with frame-grid pentode unit used as combined oscillator-mixer tube in television receivers using an intermediate frequency in the order of 40 MHz. Outlines section, 6B; requires miniature 9-contact socket. Types 4KE8 and 5KE8 are identical with type 6KE8 except for heater ratings.



9DC

|                               |          |          |          |         |
|-------------------------------|----------|----------|----------|---------|
| Heater Voltage (ac/dc)        | 4KE8 4.5 | 5KE8 5.6 | 6KE8 6.3 | volts   |
| Heater Current                | 0.6      | 0.45     | 0.4      | ampere  |
| Heater Warm-up Time (Average) | 11       | 11       | —        | seconds |

|                         |          |          |          |       |
|-------------------------|----------|----------|----------|-------|
| Heater-Cathode Voltage: |          |          |          |       |
| Peak value              | ±200 max | ±200 max | ±200 max | volts |
| Average value           | 100 max  | 100 max  | 100 max  | volts |

**Direct Interelectrode Capacitances:†**

**Triode Unit:**

|   |     |    |
|---|-----|----|
| Grid to Plate   | 1.3 | pF |
| Grid to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield  | 2.4 | pF |
| Plate to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield | 2   | pF |

**Pentode Unit:**

|   |           |    |
|---|-----------|----|
| Grid No.1 to Plate  | 0.015 max | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 5         | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 3.4       | pF |
| Heater to Triode Cathode and Pentode Cathode                            | 5.5       | pF |

† With external shield connected to cathode of unit under test, except as noted.  
 \* With external shield connected to ground.

**Class A<sub>1</sub> Amplifier**



**MAXIMUM RATINGS (Design-Maximum Values)**

|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage   | 280         | 280                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —           | 280                | volts |
| Grid-No.2 Voltage                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0                  | volts |
| Cathode Current                                       | 20          | 20                 | mA    |
| Plate Dissipation                                     | 2           | 2                  | watts |
| Grid-No.2 Input:                                      |             | 0.5                | watt  |
| For grid-No.2 voltages up to 140 volts                | —           | —                  |       |
| For grid-No.2 voltages between 140 and 280 volts      | —           | See curve page 300 |       |

**CHARACTERISTICS**

|                            |      |        |       |
|----------------------------|------|--------|-------|
| Plate Supply Voltage       | 125  | 125    | volts |
| Grid-No.2 Supply Voltage   | —    | 125    | volts |
| Grid-No.1 Supply Voltage   | 0    | 0      | volts |
| Cathode-Bias Resistor      | 68   | 33     | ohms  |
| Amplification Factor       | 40   | —      |       |
| Plate Resistance (Approx.) | 5000 | 125000 | ohms  |
| Transconductance           | 8000 | 12000  | μmhos |


|  |     |      |        |
|--|-----|------|--------|
| Plate Current .....                    | 13  | 10   | mA     |
| Grid-No.2 Current .....                | —   | 2.8  | mA     |
| Grid-No.1 Voltage (Approx.):           |     |      |        |
| For plate current of 100 $\mu$ A ..... | 5   | —    | volts  |
| For plate current of 50 $\mu$ A .....  | —   | -3   | volts  |
| <b>MAXIMUM CIRCUIT VALUES</b>          |     |      |        |
| Grid-No.1-Circuit Resistance:          |     |      |        |
| For fixed-bias operation .....         | 0.5 | 0.25 | megohm |
| For cathode-bias operation .....       | 1   | 0.5  | megohm |

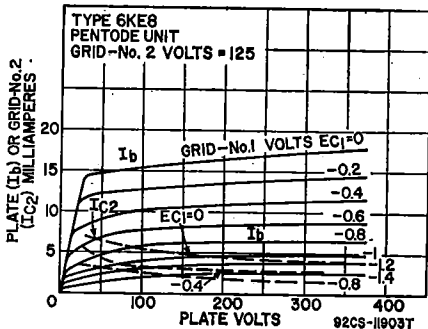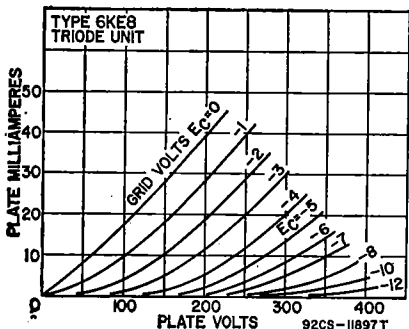

POWER PENTODE

6KG6A/  
EL509

40KG6A/PL509



Magnoval type used as a horizontal-deflection amplifier in color television receivers. Outlines section, 38A; requires 9-contact magnoval socket. Type 40KG6A/PL509 is identical with type 6KG6A/EL509 except for heater ratings.

|                                     |     |     |         |
|-------------------------------------|-----|-----|---------|
| Heater Voltage (ac/dc) .....        | 6.3 | 40  | volts   |
| Heater Current .....                | 2   | 0.3 | amperes |
| Peak Heater-Cathode Voltage .....   | 250 |     | volts   |
| Direct Interelectrode Capacitances: |     |     |         |
| Plate to Grid-No.1 .....            | 2.5 |     | pF      |
| Grid-No.1 to Heater .....           | 0.2 |     | pF      |

Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|                          |             |      |       |
|--------------------------|-------------|------|-------|
| Plate Voltage .....      | 45          | 160  | volts |
| Grid-No.3 Voltage† ..... | 0           | 0    | volts |
| Grid-No.2 Voltage .....  | 160         | 160  | volts |
| Grid-No.1 Voltage .....  | 0           | 0    | volts |
| Plate Current* .....     | 1000 (min.) | 1400 | mA    |
| Grid-No.2 Current* ..... | —           | 45   | mA    |

Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

MAXIMUM RATINGS (Design-Maximum Values)

|  |      |       |
|--|------|-------|
| Plate Supply Voltage .....                       | 700  | volts |
| Peak Positive-Pulse Plate Voltage* .....         | 7000 | volts |
| Grid-No.2 Voltage (zero-current) .....           | 700  | volts |
| Grid-No.2 Voltage .....                          | 250  | volts |
| Plate Dissipation (Absolute-Maximum Value) ..... | 34   | watts |
| Grid-No.2 Input .....                            | 7    | watts |
| Cathode Current .....                            | 500  | mA    |

**MAXIMUM CIRCUIT VALUES**

Grid-No.1-Circuit Resistance:

|                                  |      |         |
|----------------------------------|------|---------|
| For fixed-bias operation .....   | 0.25 | megohm  |
| For cathode-bias operation ..... | 2.2  | megohms |

‡ In horizontal-deflection service, 15 volts may be applied to grid-No.3 to minimize snivets.

\* These values can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

\* Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

**6KL8**


Refer to chart at end of section.

**6KM6**

22KM6

**BEAM POWER TUBE**

Novar type used as horizontal-deflection amplifier in color and black-and-white television receivers. Outlines section, 18A; requires novar 9-contact socket. Type 22KM6 is identical with type 6KM6 except for heater ratings.





9QL

|  |          |          |         |
|--|----------|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | 22       | volts   |
| Heater Current .....   | 1.6      | 0.45     | amperes |
| Heater Warm-up Time .....                                    | —        | 11       | seconds |
| Heater-Cathode Voltage:                                      |          |          |         |
| Peak value .....   | ±200 max | ±200 max | volts   |
| Average value .....  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                          |          |          |         |
| Grid No.1 to Plate .....                                     |          | 1.2      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |          | 22       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |          | 9        | pF      |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|   | Triode Connection | Pentode Connection |       |       |
|---|-------------------|--------------------|-------|-------|
| Plate Voltage .....                         | 140               | 60                 | 140   | volts |
| Peak Positive-Pulse Plate Voltage**         | —                 | 6500               | —     | volts |
| Grid-No.3 (Suppressed-Grid) Voltage         | 0                 | 30                 | 30    | volts |
| Grid-No.2 (Screen-Grid) Voltage             | 140               | 140                | 140   | volts |
| Grid-No.1 (Control-Grid) Voltage            | -24.5             | 0                  | -24.5 | volts |
| Amplification Factor†                       | 4                 | —                  | —     |       |
| Plate Resistance (Approx.)                  | —                 | —                  | 6000  | ohms  |
| Transconductance                            | —                 | —                  | 9500  | μmhos |
| Plate Current                               | —                 | 560††              | 80    | mA    |
| Grid-No.2 Current                           | —                 | 31††               | 2.4   | mA    |
| Grid-No.1 Voltage for plate current of 1 mA | —                 | -110               | -42   | volts |

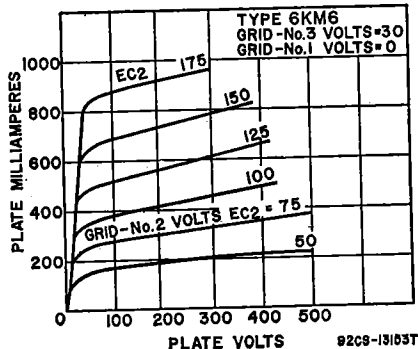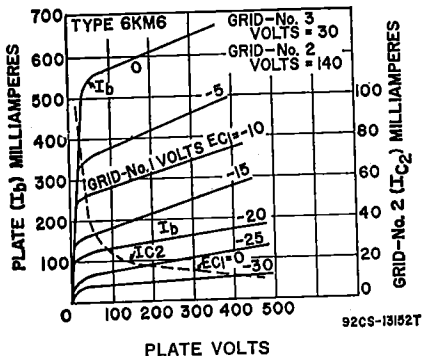

92CS-13182T

92CS-13185T

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                       |      |       |
|---------------------------------------|------|-------|
| DC Plate Supply Voltage               | 770  | volts |
| Peak Positive-Pulse Plate Voltage#    | 6500 | volts |
| Peak Negative-Pulse Plate Voltage     | 1500 | volts |
| DC Grid-No.3 Voltage*                 | 75   | volts |
| DC Grid-No.2 Voltage                  | 220  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage | 330  | volts |
| Peak Cathode Current                  | 960  | mA    |
| Average Cathode Current               | 275  | mA    |
| Grid-No.2 Input                       | 3.5  | watts |
| Plate Dissipation**                   | 20   | watts |
| Bulb Temperature (At hottest point)   | 240  | °C    |

**MAXIMUM CIRCUIT VALUES**

|                                  |      |         |
|----------------------------------|------|---------|
| Grid-No.1-Circuit Resistance:    |      |         |
| For grid-resistor-bias operation | 0.47 | megohm  |
| For plate-pulsed operation       | 10   | megohms |


# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

† With grid No.3 and grid No.2 connected, respectively, to cathode and plate at socket.

‡† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

\* In this service, a positive value may be applied to grid No.3 to minimize "snivets" interference; a typical value for this voltage is 30 volts.

\*\* A bias resistor or other means is required to protect the tube in absence of excitation.



**DIODE—SHARP-CUTOFF  
THREE-PLATE TETRODE**

**6KM8**

Miniature type used in frequency-divider and complex-wave generator circuits of electronic musical instruments. In such circuits the tetrode unit can provide three independent output-signal voltages; the diode unit can be used as a key in a vibrato circuit. Outlines section, 6E; requires miniature 9-contact socket.

|  |           |        |
|--|-----------|--------|
| Heater Voltage (ac/dc)   | 6.3       | volts  |
| Heater Current   | 0.3       | ampere |
| Heater-Cathode Voltage:  |           |        |
| Peak value   | ±200 max  | volts  |
| Average value  | 100 max   | volts  |
| Direct Interelectrode Capacitances:                            |           |        |
| Tetrode Unit:  |           |        |
| Grid No.1 to Plate No.1A                                       | 0.02 max  | pF     |
| Grid No.1 to Plate No.1B                                       | 0.02 max  | pF     |
| Grid No.1 to Plate No.2  | 0.06 max  | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Internal Shield   | 5.5       | pF     |
| Plate No.1A to Cathode, Heater, Grid No.2, and Internal Shield | 1.2       | pF     |
| Plate No.1B to Cathode, Heater, Grid No.2, and Internal Shield | 1.3       | pF     |
| Plate No.2 to Cathode, Heater, Grid No.2, and Internal Shield  | 1.8       | pF     |
| Tetrode Grid No.1 to Diode Plate                               | 0.024 max | pF     |
| Tetrode Plate No.1A to Diode Plate                             | 0.18      | pF     |
| Tetrode Plate No.1B to Diode Plate                             | 0.024     | pF     |
| Tetrode Plate No.2 to Diode Plate                              | 0.013     | pF     |

**Tetrode Unit as Class A<sub>1</sub> Amplifier**

Plates No. 1A, 1B, and 2 connected together

**CHARACTERISTICS**

|  |       |         |
|--|-------|---------|
| Plate Voltage  | 100   | volts   |
| Grid-No.2 Voltage                                      | 100   | volts   |
| Grid-No.1 Supply Voltage                               | 0     | volts   |
| Grid-No.1 Resistor (Bypassed)                          | 2.2   | megohms |
| Plate Resistance (Approx.)                             | 30000 | ohms    |
| Transconductance                                       | 3400  | μmhos   |
| Plate Current  | 4.2   | mA      |
| Grid-No.2 Current                                      | 1.7   | mA      |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA | -4    | volts   |

**Triode Connection—Plates No.1A, 1B, and 2 connected to grid No.2**

|                               |      |         |
|-------------------------------|------|---------|
| Plate Voltage                 | 100  | volts   |
| Grid-No.1 Supply Voltage      | 0    | volts   |
| Grid-No.1 Resistor (Bypassed) | 2.2  | megohms |
| Transconductance              | 4500 | μmhos   |
| Amplification Factor          | 45   |         |
| Plate Current                 | 5.5  | mA      |

**Separate-plate operation; plates not under test grounded**

|                               | 1A   | 1B   | 2    |         |
|-------------------------------|------|------|------|---------|
| Plate Voltage                 | 100  | 100  | 100  | volts   |
| Grid-No.2 Voltage             | 100  | 100  | 100  | volts   |
| Grid-No.1 Supply Voltage      | 0    | 0    | 0    | volts   |
| Grid-No.1 Resistor (Bypassed) | 2.2  | 2.2  | 2.2  | megohms |
| Transconductance              | 2000 | 2000 | 1800 | μmhos   |
| Plate Resistance (Approx.)    | 0.1  | 0.1  | 0.12 | megohm  |
| Plate Current                 | 2.3  | 2.3  | 2.1  | mA      |
| Grid-No.2 Current             | 3.8  | 3.8  | 3.3  | mA      |

**Tetrode Unit as Frequency Divider and Complex-Wave Generator**

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |                    |       |
|--|--------------------|-------|
| Plate Voltage (Each plate)                       | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage           | 330                | volts |
| Grid-No.2 Voltage                                | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:                |                    |       |
| Positive-bias value                              | 0                  | volts |
| Negative-bias value                              | 50                 | volts |
| Plate Dissipation (Each plate)                   | 1                  | watt  |
| Grid-No.2 Input:                                 |                    |       |
| For grid-No.2 voltages up to 165 volts           | 0.65               | watt  |
| For grid-No.2 voltages between 165 and 330 volts | See curve page 300 |       |

**MAXIMUM CIRCUIT VALUE**

|   |     |         |
|---|-----|---------|
| Grid-No.1-Circuit Resistance, for grid-No.1-resistor-bias operation | 2.2 | megohms |
|---|-----|---------|



**Diode Unit**

**MAXIMUM RATINGS (Design-Maximum Values)**

|               |   |    |
|---------------|---|----|
| Plate Current | 1 | mA |
|---------------|---|----|

**CHARACTERISTICS, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 2 mA | 10 | volts |
|---|----|-------|

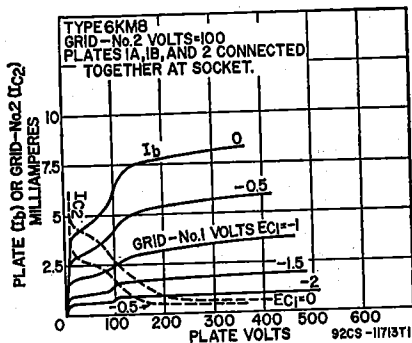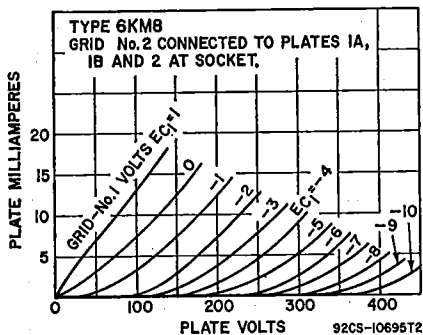


**6KN6**

42KN6

**DUAL BEAM PENTODE**

Duodecar type used as horizontal-deflection amplifier in color and black-and-white television receivers, with units in parallel. Outlines section, 16D; requires duodecar 12-contact socket. Type 42KN6 is identical with type 6KN6 except for heater ratings.



12GU

|                           |                  |                 |         |
|---------------------------|------------------|-----------------|---------|
| Heater Arrangement .....  | 6KN6<br>Parallel | 42KN6<br>Series |         |
| Heater Voltage .....      | 6.3              | 42              | volts   |
| Heater Current .....      | 3                | 0.45            | ampere  |
| Heater Warm-up Time ..... | —                | 11              | seconds |
| Heater-Cathode Voltage:   |                  |                 |         |
| Peak value .....          | ±200 max         | ±200 max        | volts   |
| Average value .....       | 100 max          | 100 max         | volts   |

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS   | Triode*<br>Connection |     | Pentode Connection |       |       |
|---|-----------------------|-----|--------------------|-------|-------|
|   | Plate Voltage .....   | 130 | 5500               | 60    |       |
| Grid-No.2 (Screen-Grid) Voltage ..                              | 130                   | 125 | 125                | 130   | volts |
| Grid-No.1 (Control-Grid) Voltage ..                             | -20                   | —   | 0                  | -20   | volts |
| Plate Resistance .....  | —                     | —   | —                  | 4000  | ohms  |
| Transconductance .....  | —                     | —   | —                  | 16000 | μmhos |
| Plate Current .....   | —                     | —   | 800 <sup>A</sup>   | 100   | mA    |
| Grid-No.2 Current .....   | —                     | —   | 50 <sup>A</sup>    | 4     | mA    |
| Grid-No.1 Voltage (Approx.) for<br>plate current of 1 mA .....  | —                     | —   | —                  | -33   | volts |
| Grid-No.1 Voltage (Approx.) for<br>plate current of 75 μA ..... | —                     | 100 | —                  | —     | volts |
| Amplification Factor .....                                      | 4.5                   | —   | —                  | —     |       |

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

\* Grid No.2 connected to plate.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| DC Plate Supply Voltage .....               | 770  | volts |
| Peak Positive-Pulse Plate Voltage# .....    | 6500 | volts |
| Peak Negative-Pulse Plate Voltage .....     | 1500 | volts |
| Grid-No.2 Voltage .....                     | 220  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Average Cathode Current .....               | 400  | mA    |
| Peak Cathode Current .....                  | 1500 | mA    |
| Plate Dissipation* .....                    | 30   | watts |
| Grid-No.2 Input .....                       | 5    | watts |
| Bulb Temperature (At hottest point) .....   | 260  | °C    |

**MAXIMUM CIRCUIT VALUE**

|                                    |   |        |
|------------------------------------|---|--------|
| Grid-No.1-Circuit Resistance ..... | 1 | megohm |
|------------------------------------|---|--------|

# Pulse duration must not exceed 15% of one horizontal scanning cycle (10 microseconds).


\* A bias resistor or other means is required to protect the tube in absence of excitation.

Refer to chart at end of section.

**6KN8/6RHH8**

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6KR8**  
10KR8



Miniature type used in television receiver applications. The triode unit is used as a general-purpose amplifier; the pentode unit is used as a video amplifier. Outlines section, 6E; requires miniature 9-contact socket. Type 10KR8 is identical with type 6KR8 except for heater ratings.

|                                     |             |               |         |
|-------------------------------------|-------------|---------------|---------|
| Heater Voltage (ac/dc) .....        | 6KR8<br>6.3 | 10KR8<br>10.5 | volts   |
| Heater Current .....                | 0.75        | 0.45          | ampere  |
| Heater Warm-up Time (Average) ..... | —           | 11            | seconds |
| Heater-Cathode Voltage:             |             |               |         |
| Peak value .....                    | ±200 max    | ±200 max      | volts   |
| Average value .....                 | 100 max     | 100 max       | volts   |

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage   | —           | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | 330         | 330                | volts |
| Grid-No.2 Voltage                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0                  | volts |
| Plate Dissipation                                     | 2           | 5                  | watts |
| Grid-No.2 Input:                                      |             |                    |       |
| For voltages up to 165 volts                          | —           | 1.1                | watts |
| For voltages between 165 and 330 volts                | —           | See curve page 300 |       |

## CHARACTERISTICS

|   | Triode Unit | Pentode Unit |       |       |
|---|-------------|--------------|-------|-------|
| Plate Supply Voltage                                    | 125         | 35           | 200   | volts |
| Grid-No.2 Supply Voltage                                | —           | 100          | 100   | volts |
| Grid-No.1 Voltage                                       | —           | 0            | —     | volts |
| Cathode-Bias Resistor                                   | 68          | —            | 82    | ohms  |
| Amplification Factor                                    | 46          | —            | —     |       |
| Plate Resistance (Approx.)                              | 4400        | —            | 60000 | ohms  |
| Transconductance  | 10400       | —            | 20000 | μmhos |
| Plate Current   | 15          | 54           | 19.5  | mA    |
| Grid-No.2 Current                                       | —           | 13.5         | 3     | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA  | —8          | —            | —     | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | —           | —            | -6.3  | volts |

## MAXIMUM CIRCUIT VALUES

|                               | Triode Unit | Pentode Unit |        |
|-------------------------------|-------------|--------------|--------|
| Grid-No.1-Circuit Resistance: |             |              |        |
| For fixed-bias operation      | 0.5         | 0.5          | megohm |
| For cathode-bias operation    | 1           | 1            | megohm |

6KS6


Refer to chart at end of section.  
For replacement use type 6BN6/6KS6.

6KT6

3KT6, 4KT6

SEMIREMOTE-CUTOFF  
PENTODE

Miniature type with frame grid used as if-amplifier tube in television receivers utilizing an intermediate frequency in the order of 40 MHz. Outlines section, 6B; requires miniature 9-contact socket. Types 3KT6 and 4KT6 are identical with type 6KT6 except for heater ratings.



9PM

|   | 3KT6     | 4KT6     | 6KT6      |         |
|---|----------|----------|-----------|---------|
| Heater Voltage (ac/dc)  | 3.5      | 4.5      | 6.3       | volts   |
| Heater Current  | 0.6      | 0.45     | 0.3       | ampere  |
| Heater Warm-up Time (Average)   | 11       | 11       | —         | seconds |
| Heater-Cathode Voltage:   |          |          |           |         |
| Peak value  | ±200 max | ±200 max | ±200 max  | volts   |
| Average value   | 100 max  | 100 max  | 100 max   | volts   |
| Direct Interelectrode Capacitances:                                     |          |          |           |         |
| Grid No.1 to Plate  |          |          | 0.019 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield |          |          | 9.5       | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     |          |          | 3         | pF      |

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|  |                    |       |
|--|--------------------|-------|
| Plate Voltage                                    | 330                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage              | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage           | 330                | volts |
| Grid-No.2 Voltage                                | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage                 | 0                  | volts |
| Plate Dissipation                                | 3.1                | watts |
| Grid-No.2 Input:                                 |                    |       |
| For grid-No.2 voltages up to 165 volts           | 0.6                | watt  |
| For grid-No.2 voltages between 165 and 330 volts | See curve page 300 |       |





**CHARACTERISTICS**

|  |        |     |       |
|--|--------|-----|-------|
| Plate Supply Voltage .....   | 125    | 170 | volts |
| Grid-No.3 Voltage .....  | 0      | 0   | volts |
| Grid-No.2 Supply Voltage .....                                     | 125    | 170 | volts |
| Cathode-Bias Resistor .....  | 56     | 56  | ohms  |
| Plate Resistor .....   | 160000 | —   | ohms  |
| Transconductance .....   | 18000  | —   | μmhos |
| Plate Current .....  | 17     | —   | mA    |
| Grid-No.2 Current .....  | 4.2    | —   | mA    |
| Grid-No.1 Voltage (Approx.) for transconductance of 10 μmhos ..... | —      | -22 | volts |

**MAXIMUM CIRCUIT VALUES**

|                                  |   |      |        |
|----------------------------------|---|------|--------|
| Grid-No.1-Circuit Resistance:    |   |      |        |
| For fixed-bias operation .....   | — | 0.25 | megohm |
| For cathode-bias operation ..... | — | 1    | megohm |

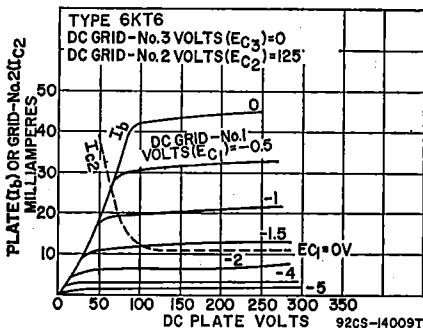

**HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6KT8**

Miniature type used in color and black-and-white television receiver applications. The pentode unit is used as an if-amplifier tube, and the triode unit as a sync-separator or voltage-amplifier tube. Outlines section, 6B; requires miniature 9-contact socket.

|  |            |           |    |
|--|------------|-----------|----|
| Heater Voltage (ac/dc) .....   | 6.3        | volts     |    |
| Heater Current .....   | 0.6        | ampere    |    |
| Heater-Cathode Voltage:  |            |           |    |
| Peak value .....   | ±200 max   | volts     |    |
| Average value .....  | 100 max    | volts     |    |
| Direct Interelectrode Capacitances:  |            |           |    |
| Triode Unit:   | Unshielded | Shielded  |    |
| Grid to Plate .....  | 3          | 3         | pF |
| Grid to Cathode, Heater, Grid No.3 of Pentode Unit, and Internal Shield .....  | 3.2        | 3.2       | pF |
| Plate to Cathode, Heater, Grid No.3 of Pentode Unit, and Internal Shield ..... | 1.6        | 2.4       | pF |
| Pentode Unit:  |            |           |    |
| Grid No.1 to Plate .....   | 0.046 max  | 0.030 max | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....  | 7.5        | 7.5       | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....      | 2.2        | 2.8       | pF |
| Grid of Triode Unit to Plate of Pentode Unit .....                             | 0.018 max  | 0.003 max | pF |
| Grid No.1 of Pentode Unit to Plate of Triode Unit .....                        | 0.006 max  | 0.002 max | pF |

**Class A<sub>1</sub> Amplifier**

|  |             |              |                    |
|--|-------------|--------------|--------------------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b> | Triode Unit | Pentode Unit |                    |
| Plate Voltage .....                            | 330         | 330          | volts              |
| Grid-No.2 (Screen-Grid) Supply Voltage .....   | —           | 330          | volts              |
| Grid-No.2 Voltage .....                        |             |              | See curve page 300 |

|   |   |                    |       |
|---|---|--------------------|-------|
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0 | 0                  | volts |
| Plate Dissipation                                     | 1 | 2.5                | watts |
| Grid-No.2 Input:                                      |   | 0.55               | watt  |
| For grid-No.2 voltages up to 165 volts                | — |                    |       |
| For grid-No.2 voltages between 165 and 330 volts      | — | See curve page 300 |       |

**CHARACTERISTICS**

|   |       |        |            |
|---|-------|--------|------------|
| Plate Voltage   | 250   | 125    | volts      |
| Grid-No.2 Voltage   | —     | 125    | volts      |
| Grid-No.1 Voltage   | —2    | —1     | volts      |
| Amplification Factor  | 100   | —      |            |
| Plate Resistance (Approx.)                                  | 31500 | 150000 | ohms       |
| Transconductance  | 3200  | 10000  | $\mu$ mhos |
| Plate Current   | 1.8   | 12     | mA         |
| Grid-No.2 Current   | —     | 4.5    | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A | —3.5  | —7     | volts      |

**MAXIMUM CIRCUIT VALUES**

|                               |     |     |        |
|-------------------------------|-----|-----|--------|
| Grid-No.1-Circuit Resistance: |     |     |        |
| For fixed-bias operation      | 0.5 | 0.5 | megohm |
| For cathode-bias operation    | 1   | 1   | megohm |

**6KUB**

Refer to chart at end of section.

**6KV6**


Refer to chart at end of section.

**6KV6A**

17KV6A, 22KV6A

**BEAM POWER TUBE**

Novar type used for high-voltage pulse- or shunt-regulator applications in color television receivers. Outlines section, 31D; requires novar 9-contact socket. Types 17KV6A and 22KV6A are identical with type 6KV6A except for heater ratings.



|  | 6KV6A                | 17KV6A               | 22KV6A               |         |
|--|----------------------|----------------------|----------------------|---------|
| Heater Voltage (ac/dc)                                 | 6.3                  | 16.8                 | 22                   | volts   |
| Heater Current   | 1.6                  | 0.6                  | 0.45                 | amperes |
| Heater Warm-up Time                                    | —                    | 11                   | 11                   | seconds |
| Heater-Cathode Voltage:                                |                      |                      |                      |         |
| Peak value   | +200 max<br>—500 max | +200 max<br>—500 max | +200 max<br>—500 max | volts   |
| Average value  | 100 max              | 100 max              | 100 max              | volts   |
| Direct Interelectrode Capacitances (Approx.):          |                      |                      |                      |         |
| Grid No.1 to Plate                                     |                      | 0.6                  |                      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 |                      | 22                   |                      | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     |                      | 9                    |                      | pF      |

**Class A<sub>1</sub> Amplifier****CHARACTERISTICS**

|   |           |       |            |
|---|-----------|-------|------------|
| Plate Voltage                               | 100       | 140   | volts      |
| Grid-No.3 (Suppressor-Grid) Voltage         | 0         | 0     | volts      |
| Grid-No.2 (Screen-Grid) Voltage             | 140       | 140   | volts      |
| Grid-No.1 (Control-Grid) Voltage            | 0         | —24.5 | volts      |
| Triode Amplification Factor#                | —         | 4     |            |
| Plate Resistance (Approx.)                  | —         | 10000 | ohms       |
| Transconductance                            | —         | 6000  | $\mu$ mhos |
| Plate Current                               | 440 $\mu$ | 40    | mA         |
| Grid-No.2 Current                           | 30 $\mu$  | 2.4   | mA         |
| Grid-No.1 Voltage for plate current of 1 mA | —         | —42   | volts      |

**High-Voltage-Pulse Shunt Regulator**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**


|  |      |       |
|--|------|-------|
| DC Plate Supply Voltage ( $I_b = 0$ mA)        | 900  | volts |
| Peak Positive-Pulse Plate Voltage <sup>A</sup> | 6500 | volts |

|   |      |       |
|---|------|-------|
| Peak Negative-Pulse Plate Voltage .....         | 1500 | volts |
| Peak Positive-Pulse Grid-No.2 Voltage .....     | 600  | volts |
| DC Grid-No.3 Voltage .....                      | 75   | volts |
| DC Grid-No.2 Voltage .....                      | 220  | volts |
| DC Grid-No.1 Voltage, Negative-bias value ..... | 250  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage .....     | 330  | volts |
| Peak Cathode Current .....                      | 950  | mA    |
| Average Cathode Current .....                   | 275  | mA    |
| Plate Dissipation ‡ .....                       | 28•  | watts |
| Grid-No.2 Input .....                           | 2    | watts |
| Bulb Temperature (At hottest point) .....       | 240  | °C    |

**MAXIMUM CIRCUIT VALUE**

Grid-No.1-Circuit Resistance:  
 For grid-No.1-resistor-bias operation ..... 1 megohm

- # Grid-No.3 and grid-No.2 connected, respectively, to cathode and plate at socket.
- This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.
- ▲ Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).
- ‡ Adequate circuit precautions must be taken to protect the tube in the absence of grid-No.1 bias.
- Plate dissipations up to 32 watts maximum are permissible for short periods of time provided the maximum envelope-temperature rating is not exceeded. This condition may exist under high-line voltage, zero picture tube beam current.



**HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6KV8**  
11KV8

Miniature type with frame-grid pentode unit used in black-and-white television receivers. The triode unit is used in general-purpose voltage-amplifier, sync-separator, and sound-if-amplifier applications. The pentode unit is used as a video-output tube. Outlines section, 6E; requires miniature 9-contact socket. For curves of average plate characteristics for triode unit, refer to type 6AW8A. Type 11KV8 is identical with type 6KV8 except for heater ratings.

|                                     | 6KV8     | 11KV8    |         |
|-------------------------------------|----------|----------|---------|
| Heater Voltage (ac/dc) .....        | 6.3      | 10.9     | volts   |
| Heater Current .....                | 0.775    | 0.45     | ampere  |
| Heater Warm-up Time (Average) ..... | —        | 11       | seconds |
| Heater-Cathode Voltage:             |          |          |         |
| Peak value .....                    | ±200 max | ±200 max | volts   |
| Average value .....                 | 100 max  | 100 max  | volts   |

**Direct Interelectrode Capacitances (Approx.):**

|   |  |           |    |
|---|--|-----------|----|
| <b>Triode Unit:</b>   |  |           |    |
| Grid to Plate .....   |  | 3.7       | pF |
| Grid to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield .....  |  | 2.5       | pF |
| Plate to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield ..... |  | 2.4       | pF |
| Triode Grid to Pentode Plate .....  |  | 0.015 max |    |
| <b>Pentode Unit:</b>  |  |           |    |
| Grid No.1 to Plate .....  |  | 0.12 max  | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....           |  | 13        | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....               |  | 4.8       | pF |
| Pentode Plate to Triode Plate .....   |  | 0.17 max  | pF |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**


|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage .....   | 300         | 300                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —           | 300                | volts |
| Grid-No.2 Voltage .....                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0           | 0                  | volts |
| Plate Dissipation .....                                     | 1           | 5                  | watts |
| Grid-No.2 Input:  |             |                    |       |
| For Grid-No.2 voltages up to 150 volts .....                | —           | 1                  | watt  |
| For Grid-No.2 voltages between 150 and 300 volts .....      | —           | See curve page 300 |       |

**CHARACTERISTICS**

|  | Triode Unit | Pentode Unit |                  |
|--|-------------|--------------|------------------|
| Plate Supply Voltage .....   | 200         | 125          | 200 volts        |
| Grid-No.2 Supply Voltage .....                                     | —           | 125          | 125 volts        |
| Grid-No.1 Supply Voltage .....                                     | -2          | 0            | 0 volts          |
| Cathode-Bias Resistor .....  | —           | 82           | 68 ohms          |
| Amplification Factor .....   | 70          | —            | —                |
| Plate Resistance (Approx.) .....                                   | 17500       | 55000        | 75000 ohms       |
| Transconductance .....   | 4000        | 21000        | 23000 $\mu$ mhos |
| Plate Current .....  | 4           | 16.5         | 20 mA            |
| Grid-No.2 Current .....  | —           | 3.1          | 3.5 mA           |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | -4.5        | -4.2         | -4.2 volts       |

**MAXIMUM CIRCUIT VALUES**

|                                  | Triode Unit | Pentode Unit |        |
|----------------------------------|-------------|--------------|--------|
| Grid-No.1-Circuit Resistance:    |             |              |        |
| For fixed-bias operation .....   | 0.5         | 0.1          | megohm |
| For cathode-bias operation ..... | 1           | 0.25         | megohm |

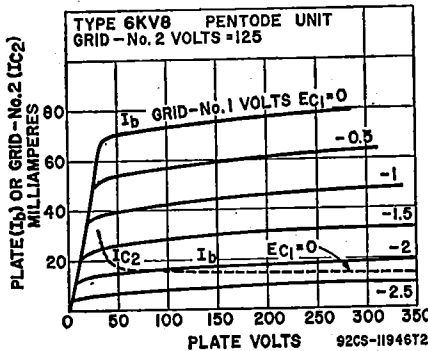

**6KY6**

Refer to chart at end of section.

**6KY8**


Refer to chart at end of section.

**6KY8A**

15KY8A

**HIGH-MU TRIODE—  
BEAM POWER TUBE**

Novar type used in combined vertical-deflection-oscillator and vertical-deflection-amplifier applications in black-and-white television receivers having low-voltage "B" supplies. Outlines section, 30A; requires novar 9-contact socket. Type 15KY8A is identical with type 6KY8A except for heater ratings.



9QT

|  | 6KY8A         | 15KY8A        |         |
|--|---------------|---------------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3           | 15            | volts   |
| Heater Current .....   | 1.1           | 0.45          | amperes |
| Heater Warm-up Time (Average) .....                          | —             | 11            | seconds |
| Heater Cathode Voltage:                                      |               |               |         |
| Peak value .....   | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....  | 100 max       | 100 max       | volts   |
| Direct Interelectrode Capacitances (Approx.):                |               |               |         |
| Triode Unit:   |               |               |         |
| Grid to Plate .....  |               | 0.44          | pF      |
| Grid to Cathode and Heater .....                             |               | 15            | pF      |
| Plate to Cathode and Heater .....                            |               | 7             | pF      |
| Pentode Unit:  |               |               |         |
| Grid No.1 to Plate .....                                     |               | 0.048         | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |               | 2.6           | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |               | 0.28          | pF      |



Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|   | Triode Unit |      | Beam Power Unit |     |       |
|---|-------------|------|-----------------|-----|-------|
| Plate Voltage   | 250         | 50   | 135             | 120 | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | —           | 120  | 120             | *   | volts |
| Grid-No.1 (Control-Grid) Voltage                      | -3          | 0    | -10             | -10 | volts |
| Amplification Factor                                  | 64          | —    | —               | 7   |       |
| Plate Resistance (Approx.)                            | 40000       | —    | 18000           | —   | ohms  |
| Transconductance                                      | 1600        | —    | 8400            | —   | μmhos |
| Plate Current   | 1.4         | 170* | 39              | —   | mA    |
| Grid-No.2 Current                                     | —           | 20*  | 3               | —   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | —           | —    | -24             | —   | volts |

\* Triode connection, grid No.2 connected to plate at socket.

• This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

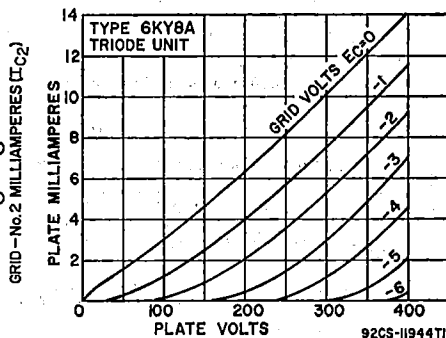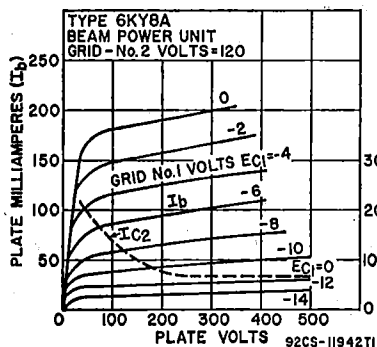

Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system

MAXIMUM RATINGS (Design-Maximum Values)

|                                       |     |       |       |
|---------------------------------------|-----|-------|-------|
| DC Plate Voltage                      | 330 | 300   | volts |
| Peak Positive-Pulse Plate Voltage#    | —   | 2200† | volts |
| (Absolute Maximum)                    | —   | 150   | volts |
| DC Grid-No.2 Voltage                  | 400 | 250   | volts |
| Peak Negative-Pulse Grid-No.1 Voltage | 77  | 200   | mA    |
| Peak Cathode Current                  | 22  | 60    | mA    |
| Average Cathode Current               | 1.5 | 12    | watts |
| Plate Dissipation                     | —   | 1.9   | watts |
| Grid-No.2 Input                       |     |       |       |

| Triode Unit Oscillator | Beam Power Unit Amplifier |       |
|------------------------|---------------------------|-------|
| 330                    | 300                       | volts |
| —                      | 2200†                     | volts |
| —                      | 150                       | volts |
| 400                    | 250                       | volts |
| 77                     | 200                       | mA    |
| 22                     | 60                        | mA    |
| 1.5                    | 12                        | watts |
| —                      | 1.9                       | watts |


MAXIMUM CIRCUIT VALUES

Grid-No.1-Circuit Resistance:

|                                  |     |     |         |
|----------------------------------|-----|-----|---------|
| For grid-resistor-bias operation | 2.2 | 2.2 | megohms |
|----------------------------------|-----|-----|---------|

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

† Under no conditions should this maximum value be exceeded.



9FZ

MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE

6KZ8

5KZ8, 9KZ8

Miniature type used as combined oscillator and mixer in vhf color and black-and-white television receivers. Outlines section, 6B; requires miniature 9-contact socket. Types 5KZ8 and 9KZ8 are identical with type 6KZ8 except for heater ratings.

|                                     | 5KZ8     | 6KZ8     | 9KZ8     |         |
|-------------------------------------|----------|----------|----------|---------|
| Heater Voltage (ac/dc) .....        | 4.7      | 6.3      | 9.45     | volts   |
| Heater Current .....                | 0.6      | 0.45     | 0.3      | ampere  |
| Heater Warm-up Time (Average) ..... | 11       | 11       | 11       | seconds |
| Heater-Cathode Voltage:             |          |          |          |         |
| Peak value .....                    | ±200 max | ±200 max | ±200 max | volts   |
| Average value .....                 | 100 max  | 100 max  | 100 max  | volts   |

## Direct Interelectrode Capacitances:\*

| Triode Unit:  |  |           |    |
|---|--|-----------|----|
| Grid to Plate .....   |  | 1.6       | pF |
| Grid to Triode Cathode, Pentode Cathode, Heater, Pentode Grid No.3, and Heater .....  |  | 3.2       | pF |
| Plate to Triode Cathode, Pentode Cathode, Heater, Pentode Grid No.3, and Heater ..... |  | 1.8       | pF |
| Pentode Unit:   |  |           |    |
| Grid No.1 to Plate .....  |  | 0.01 max. | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....         |  | 5.5       | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....             |  | 3.4       | pF |
| Heater to Cathode (Each Unit) .....   |  | 3.2#      | pF |

\* With external shield connected to cathode.

# With external shield connected to ground.

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage .....   | 330         | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —           | 330                | volts |
| Grid-No.2 Voltage .....                                     | —           | See curve page 300 |       |
| Grid No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0           | 0                  | volts |
| Plate Dissipation .....                                     | 2.5         | 2.5                | watts |
| Grid-No.2 Input:  |             |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | —           | 0.55               | watt  |
| For grid-No.2 voltages between 165 and 330 volts .....      | —           | See curve page 300 |       |

## CHARACTERISTICS

|  |      |       |       |
|--|------|-------|-------|
| Plate Voltage .....  | 125  | 125   | volts |
| Grid-No.2 Voltage .....                                      | —    | 125   | volts |
| Grid-No.1 Voltage .....                                      | —1   | —1    | volt  |
| Amplification Factor .....                                   | 46   | —     |       |
| Plate Resistance (Approx.) .....                             | 5400 | 20000 | ohms  |
| Transconductance .....                                       | 8500 | 7500  | μmhos |
| Plate Current .....  | 13.5 | 12    | mA    |
| Grid-No.2 Current .....                                      | —    | 4     | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA ..... | —8   | —8    | volts |

## MAXIMUM CIRCUIT VALUES

|                                  | Triode Unit | Pentode Unit |        |
|----------------------------------|-------------|--------------|--------|
| Grid-No.1-Circuit Resistance:    |             |              |        |
| For fixed-bias operation .....   | 0.25        | 0.25         | megohm |
| For cathode-bias operation ..... | 0.5         | 0.5          | megohm |


6L5G

Refer to chart at end of section.

6L6  
6L6GC

## BEAM POWER TUBE

Metal type 6L6 and glass octal type 6L6GC are used in the output stage of audio amplifying equipment, especially units designed to have ample reserve of power-delivering ability. Outlines section, 4 and 19D, respectively; require octal socket. These tubes, like other power-handling tubes, should be adequately ventilated. Type 6L6GC can be used in place of type 6L6 and may be supplied with pin 1 omitted.



7AC

|   |          |          |        |
|---|----------|----------|--------|
| Heater Voltage (ac/dc) .....                                    |          | 6.3      | volts  |
| Heater Current .....  |          | 0.9      | ampere |
| Heater-Cathode Voltage:   |          |          |        |
| Peak value .....  | 6L6      | 6L6GC    |        |
| Average value .....   | ±180 max | ±200 max | volts  |
| Direct Interelectrode Capacitances (Approx.):                   |          | 100 max  | volts  |
| Grid No.1 to Plate .....  | 0.4*     | 0.6      | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and<br>Grid No.3 ..... | 10*      | 10       | pF     |
| Plate to Cathode, Heater, Grid No.2, and<br>Grid No.3 .....     | 12*      | 6.5      | pF     |

\* With pin 1 connected to pin 8.

**Class A<sub>1</sub> Amplifier**

| MAXIMUM RATINGS                       | 6L6                     | 6L6GC                    |       |
|---------------------------------------|-------------------------|--------------------------|-------|
|                                       | Design-Center<br>Values | Design Maximum<br>Values |       |
| Plate Voltage .....                   | 360                     | 500                      | volts |
| Grid-No.2 (Screen-Grid) Voltage ..... | 270                     | 450*                     | volts |
| Plate Dissipation .....               | 19                      | 30                       | watts |
| Grid-No.2 Input .....                 | 2.5                     | 5                        | watts |

**TYPICAL OPERATION**

|  |       |       |       |          |
|--|-------|-------|-------|----------|
| Plate Voltage .....                    | 250   | 300   | 350   | volts    |
| Grid-No.2 Voltage .....                | 250   | 200   | 250   | volts    |
| Grid-No.1 (Control-Grid) Voltage ..... | -14   | -12.5 | -18   | volts    |
| Peak AF Grid-No.1 Voltage .....        | 14    | 12.5  | 18    | volts    |
| Zero-Signal Plate Current .....        | 72    | 48    | 54    | mA       |
| Maximum-Signal Plate Current .....     | 79    | 55    | 66    | mA       |
| Zero-Signal Grid-No.2 Current .....    | 5     | 2.5   | 2.5   | mA       |
| Maximum-Signal Grid-No.2 Current ..... | 7.3   | 4.7   | 7     | mA       |
| Plate Resistance (Approx.) .....       | 22500 | 35000 | 33000 | ohms     |
| Transconductance .....                 | 6000  | 5300  | 5200  | μmhos    |
| Load Resistance .....                  | 2500  | 4500  | 4200  | ohms     |
| Total Harmonic Distortion .....        | 10    | 11    | 15    | per cent |
| Maximum-Signal Power Output .....      | 6.5   | 6.5   | 10.8  | watts    |

\* In push-pull circuits where grid No.2 of each tube is connected to a tap on the plate winding of the output transformer, this maximum rating is 500 volts.

**Class A<sub>1</sub> Amplifier (Triode Connection)†**

| MAXIMUM RATINGS                 | 6L6                      | 6L6GC                     |       |
|---------------------------------|--------------------------|---------------------------|-------|
|                                 | Design-<br>Center Values | Design-<br>Maximum Values |       |
| Plate Voltage .....             | 275                      | 450                       | volts |
| Plate Dissipation (Total) ..... | 19                       | 30                        | watts |

**TYPICAL OPERATION**

|                                    |  |      |          |
|------------------------------------|--|------|----------|
| Plate Voltage .....                |  | 250  | volts    |
| Grid-No.1 Voltage .....            |  | -20  | volts    |
| Peak AF Grid-No.1 Voltage .....    |  | 20   | volts    |
| Zero-Signal Plate Current .....    |  | 40   | mA       |
| Maximum-Signal Plate Current ..... |  | 44   | mA       |
| Plate Resistance (Approx.) .....   |  | 1700 | ohms     |
| Amplification Factor .....         |  | 8    |          |
| Transconductance .....             |  | 4700 | μmhos    |
| Load Resistance .....              |  | 5000 | ohms     |
| Total Harmonic Distortion .....    |  | 5    | per cent |
| Maximum-Signal Power Output .....  |  | 1.4  | watts    |


† Grid No.2 connected to plate.

**Push-Pull Class A<sub>1</sub> Amplifier**

MAXIMUM RATINGS (Same as for Class A<sub>1</sub> Amplifier)

TYPICAL OPERATION (Values are for two tubes)

|  |      |       |          |
|--|------|-------|----------|
| Plate Voltage .....                              | 250  | 270   | volts    |
| Grid-No.2 Voltage .....                          | 250  | 270   | volts    |
| Grid-No.1 Voltage .....                          | -16  | -17.5 | volts    |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage .....     | 32   | 35    | volts    |
| Zero-Signal Plate Current .....                  | 120  | 134   | mA       |
| Maximum-Signal Plate Current .....               | 140  | 155   | mA       |
| Zero-Signal Grid-No.2 Current .....              | 10   | 11    | mA       |
| Maximum-Signal Grid-No.2 Current .....           | 16   | 17    | mA       |
| Effective Load Resistance (Plate-to-plate) ..... | 5000 | 5000  | ohms     |
| Total Harmonic Distortion .....                  | 2    | 2     | per cent |
| Maximum-Signal Power Output .....                | 14.5 | 17.5  | watts    |

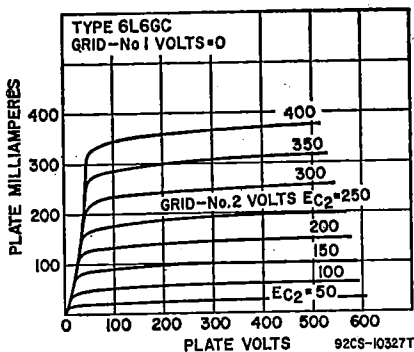

### Push-Pull Class AB<sub>1</sub> Amplifier

MAXIMUM RATINGS (Same as for Class A<sub>1</sub> Amplifier)

| TYPICAL OPERATION (Values are for two tubes) | 6L6   | 6L6GC |              |
|--|-------|-------|--------------|
| Plate Voltage                                | 360   | 360   | 450 volts    |
| Grid-No.2 Voltage                            | 270   | 270   | 400 volts    |
| Grid-No.1 Voltage                            | -22.5 | -22.5 | -37 volts    |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage       | 45    | 45    | 70 volts     |
| Zero-Signal Plate Current                    | 88    | 88    | 116 mA       |
| Maximum-Signal Plate Current                 | 132   | 140   | 210 mA       |
| Zero-Signal Grid-No.2 Current                | 5     | 5     | 5.6 mA       |
| Maximum-Signal Grid-No.2 Current             | 15    | 11    | 22 mA        |
| Effective Load Resistance (Plate-to-plate)   | 6600  | 3800  | 5600 ohms    |
| Total Harmonic Distortion                    | 2     | 2     | 1.8 per cent |
| Maximum-Signal Power Output                  | 26.5  | 18    | 55 watts     |

### Push-Pull Class AB<sub>2</sub> Amplifier

MAXIMUM RATINGS (Same as for Class A<sub>1</sub> Amplifier)

| TYPICAL OPERATION (Values are for two tubes) | 6L6  | 6L6GC |              |
|--|------|-------|--------------|
| Plate Voltage                                | 360  | 360   | 450 volts    |
| Grid-No.2 Voltage                            | 225  | 270   | 400 volts    |
| Grid-No.1 Voltage                            | -18  | -22.5 | 37 volts     |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage       | 52   | 72    | 70 volts     |
| Zero-Signal Plate Current                    | 78   | 88    | 116 mA       |
| Maximum-Signal Plate Current                 | 142  | 205   | 210 mA       |
| Zero-Signal Grid-No.2 Current                | 3.5  | 5     | 5.6 mA       |
| Maximum-Signal Grid-No.2 Current             | 11   | 16    | 22 mA        |
| Effective Load Resistance (Plate-to-plate)   | 6000 | 3800  | 5600 ohms    |
| Total Harmonic Distortion                    | 2    | 2     | 1.8 per cent |
| Maximum-Signal Power Output                  | 31   | 47    | 55 watts     |

#### MAXIMUM CIRCUIT VALUES

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |


**6L6G** Refer to chart at end of section.

**6L6GB** Refer to chart at end of section.

**6L7** Refer to chart at end of section.

**6L7G** Refer to chart at end of section.





12JF

**BEAM POWER TUBE**

**6LB6**

Duodecar type used as horizontal-deflection amplifier in color and black-and-white television receivers. Outlines section, 16E; requires duodecar 12-contact socket.

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | volts   |
| Heater Current .....   | 2.25     | amperes |
| Heater-Cathode Voltage:                                      |          |         |
| Peak value .....   | ±200 max | volts   |
| Average value .....  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                          |          |         |
| Grid No.1 to Plate .....                                     | 0.44     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 33       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 18       | pF      |

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                                       | Triode* Connection |      | Pentode Connection             |       |       |
|---|--------------------|------|--------------------------------|-------|-------|
|   |                    |      |                                |       |       |
| Peak Positive-Pulse Plate Voltage                     | —                  | 5000 | —                              | —     | volts |
| Plate Voltage   | 125                | —    | 50                             | 150   | volts |
| Grid-No.3 (Suppressor Grid)                           | —                  | —    | Connected to cathode at socket |       | volts |
| Grid-No.2 Voltage                                     | 125                | 110  | 110                            | 110   | volts |
| Grid-No.1 Voltage                                     | —25                | —    | —                              | —20   | volts |
| Plate Resistance (Approx.)                            | —                  | —    | —                              | 6600  | ohms  |
| Transconductance                                      | —                  | —    | —                              | 13400 | μmhos |
| Plate Current   | —                  | —    | 560‡                           | 105   | mA    |
| Grid-No.2 Current                                     | —                  | —    | 46‡                            | 2     | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | —                  | —125 | —                              | —     | volts |
| Amplification Factor                                  | 4                  | —    | —                              | —     |       |

\* Grid No.2 tied to plate.

‡ This value may be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| DC Plate Supply Voltage                                     | 990  | volts |
| Peak Positive Pulse Plate Voltage# (Absolute Maximum Value) | 7000 | volts |
| Peak Negative-Pulse Plate Voltage                           | 100  | volts |
| Grid-No.3 Voltage, Positive-bias value                      | 0    | volts |
| Grid-No.2 Voltage   | 200  | volts |
| Peak Negative Grid-No.1 Voltage                             | 300  | volts |
| Peak Cathode Current  | 1100 | mA    |
| Average Cathode Current                                     | 315  | mA    |
| Plate Dissipation* (Absolute Maximum Value)                 | 30   | watts |
| Grid-No.2 Input   | 5    | watts |
| Bulb Temperature (At hottest point)                         | 200  | °C    |

**MAXIMUM CIRCUIT VALUES**

|  |     |         |
|--|-----|---------|
| Grid-No.1-Circuit Resistance:                            |     |         |
| With feedback-type high voltage regulation               | 1.2 | megohms |
| With shunt-type high voltage regulation (switching mode) | 10  | megohms |
| Grid-No.3-Circuit Resistance                             | 0   | ohms    |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* A bias resistor or other means is required to protect the tube in absence of excitation.


Refer to chart at end of section.

# 6LC8

8LC8

## HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receiver applications. Pentode unit is used in noise-immune gated-agc-amplifier circuits, and the triode unit in sync-separator circuits. Outlines section, 6E; requires miniature 9-contact socket. Type 8LC8 is identical with type 6LC8 except for heater ratings. For curves of average plate characteristics, refer to type 6KA8.



|   |          |          |         |
|---|----------|----------|---------|
| Heater Voltage (ac/dc) .....                                      | 6LC8     | 8LC8     |         |
| Heater Current .....  | 6.3      | 8.4      | volts   |
| Heater Warm-up Time (Average) .....                               | 0.6      | 0.45     | ampere  |
| Heater-Cathode Voltage:   |          |          | seconds |
| Peak value .....  | ±200 max | ±200 max | volts   |
| Average value .....   | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                               |          |          |         |
| Triode Unit:  |          |          |         |
| Grid to Plate .....   |          | 2.2      | pF      |
| Grid to Cathode, Heater, Pentode Grid No.3, and Internal Shield   |          | 2.8      | pF      |
| Plate to Cathode, Heater, Pentode Grid No.3, and Internal Shield  |          | 2.2      | pF      |
| Pentode Unit:   |          |          |         |
| Grid No.1 to Plate .....  |          | 0.10 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.3, Triode Cathode, and      |          |          |         |
| Internal Shield .....   |          | 10       | pF      |
| Grid No.3, Triode Cathode, and Internal Shield to Plate .....     |          | 3.4      | pF      |
| Grid No.1 to Grid No.3, Triode Cathode, and Internal Shield ..    |          | 0.36     | pF      |
| Grid No.3, Triode Cathode, and Internal Shield to Plate, Cathode, |          |          |         |
| Heater, Grid No.1, and Grid No.2 .....                            |          | 12.5     | pF      |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|                           |             |     |       |
|---------------------------|-------------|-----|-------|
| Plate Voltage .....       | Triode Unit | 300 | volts |
| Grid Voltage:             |             |     |       |
| Positive-bias value ..... |             | 0   | volts |
| Negative-bias value ..... |             | 50  | volts |
| Plate Dissipation .....   |             | 1.1 | watts |

#### CHARACTERISTICS

|  |             |              |       |
|--|-------------|--------------|-------|
|  | Triode Unit | Pentode Unit |       |
| Plate Supply Voltage .....                       | 200         | 150          | volts |
| Grid-No.2 Supply Voltage .....                   | —           | 100          | volts |
| Grid-No.1 Voltage .....                          | —2          | —            | volts |
| Cathode-Bias Resistor .....                      | —           | 180          | ohms  |
| Amplification Factor .....                       | 70          | —            |       |
| Plate Resistance (Approx.) .....                 | 17500       | 100000       | ohms  |
| Transconductance, Grid No.1 to Plate .....       | 4000        | 4400         | μmhos |
| Transconductance, Grid No.3 to Plate .....       | —           | 600          | μmhos |
| Plate Current .....                              | 4           | 4            | mA    |
| Grid-No.2 Current .....                          | —           | 2.8          | mA    |
| Grid-No.1 Voltage (Approx.):                     |             |              |       |
| For plate current of 10 μA .....                 | —5          | —            | volts |
| For plate current of 20 μA .....                 | —           | —4           | volts |
| Grid-No.3 Voltage (Approx.) for plate current of |             |              |       |
| 20 μA .....                                      | —           | —7*          | volts |

#### MAXIMUM CIRCUIT VALUES

|                                  |             |        |
|----------------------------------|-------------|--------|
| Grid-Circuit Resistance:         | Triode Unit |        |
| For fixed-bias operation .....   | 0.25        | megohm |
| For cathode-bias operation ..... | 1           | megohm |

\* With no external connection to triode plate and triode grid.

### Gated AGC Amplifier and Noise Inverter

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)


|  |                    |       |
|--|--------------------|-------|
|  | Pentode Unit       |       |
| DC Plate Voltage .....                       | 300                | volts |
| Peak Positive-Pulse Plate Voltage# .....     | 600                | volts |
| Grid-No.3 (Control-Grid) Voltage:            |                    |       |
| Positive-bias value .....                    | 0                  | volts |
| Negative-bias value .....                    | 100                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage ..... | 300                | volts |
| Grid-No.2 Voltage .....                      | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage:            |                    |       |
| Positive-bias value .....                    | 0                  | volts |
| Negative-bias value .....                    | 50                 | volts |

|  |           |          |
|--|-----------|----------|
| Plate Dissipation .....                                | 2         | watts    |
| Grid-No.2 Input:                                       |           |          |
| For grid-No.2 voltages up to 150 volts .....           | 1.1       | watts    |
| For grid-No.2 voltages between 150 and 300 volts ..... | See curve | page 300 |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |        |
| For fixed-bias operation .....   | 0.5 | megohm |
| For cathode-bias operation ..... | 1   | megohm |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).



9QZ

**TWIN PENTODE**

**6LE8**

10LE8, 15LE8

Miniature type used as combined color demodulator and matrix amplifier in color television receivers utilizing high-level demodulation systems. Outlines section, 6G; requires miniature 9-contact socket. Types 10LE8 and 15LE8 are identical with type 6LE8 except for heater ratings.

|  |      |                |       |         |
|--|------|----------------|-------|---------|
| Heater Voltage (ac/dc) .....                         | 6LE8 | 10LE8          | 15LE8 |         |
| Heater Current .....                                 | 6.3  | 10.0           | 15.0  | volts   |
| Heater Warm-up Time (Average) .....                  | 0.76 | 0.45           | 0.3   | ampere  |
| Heater-Cathode Voltage:                              |      |                |       | seconds |
| Peak value .....                                     |      | +200, -300 max |       | volts   |
| Average value .....                                  |      | +100           |       | volts   |
| Direct Interelectrode Capacitances:                  |      |                |       |         |
| Plate (Each Unit) to All Other Electrodes .....      |      |                | 3.7   | pF      |
| Grid No.1 to All Other Electrodes .....              |      |                | 15.5  | pF      |
| Grid No.3 (Each Unit) to All Other Electrodes .....  |      |                | 6     | pF      |
| Grid No.3 to Plate (Each Unit) .....                 |      |                | 2.7   | pF      |
| Grid No.3 (Unit No.1) to Grid No.3 (Unit No.2) ..... |      |                | 0.1   | pF      |


**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                       |     |       |
|---------------------------------------|-----|-------|
| Plate Voltage (Each Unit) .....       | 300 | volts |
| Grid-No.2 (Screen-Grid) Voltage ..... | 150 | volts |
| Plate Dissipation (Each Unit) .....   | 2   | watts |
| Grid-No.2 Input .....                 | 2   | watts |

**CHARACTERISTICS**

|   |       |       |       |
|---|-------|-------|-------|
| Plate Voltage .....   | 100   | 100   | volts |
| Grid-No.3 (Suppressor-Grid) Voltage .....                   | 0     | 0     | volts |
| Grid-No.2 Voltage .....                                     | 100   | 100   | volts |
| Grid-No.1 (Control-Grid) Voltage, Negative-bias value ..... | 2.5   | 2.5   | volts |
| Transconductance (Approx.) .....                            | 5800  | 350   | μmhos |
| Plate Resistance (Approx.) .....                            | 50000 | 50000 | ohms  |
| Plate Current .....   | 8     | 7.6   | mA    |
| Grid-No.2 Current .....                                     | 15    | 14.5  | mA    |
| Grid-No.1 Voltage for plate current of 20 μA .....          | -7.2  | —     | volts |
| Grid-No.1 Voltage for plate current of 100 μA .....         | -6.3  | —     | volts |
| Grid-No.3 Voltage for plate current of 20 μA .....          | —     | -17.4 | volts |
| Grid-No.3 Voltage for plate current of 100 μA .....         | —     | -16.5 | volts |



12GW

**BEAM POWER TUBE**

**6LF6**

20LF6

Duodecax type used as horizontal deflection amplifier in color television receivers. Outlines section, 16F; requires duodecax 12-contact socket. Type 20LF6 is identical with type 6LF6 except for heater ratings.

|                                   |             |              |        |
|-----------------------------------|-------------|--------------|--------|
|                                   | <b>6LF6</b> | <b>20LF6</b> |        |
| Heater Voltage (ac/dc) .....      | 6.3         | 20           | volts  |
| Heater Current .....              | 2.0         | 0.6          | ampere |
| Peak Heater-Cathode Voltage ..... | ±275 max    | ±200 max     | volts  |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|   |     |      |       |
|---|-----|------|-------|
| Plate Voltage .....                       | 50  | 160  | volts |
| Grid-No.3 (Suppressor-Grid) Voltage ..... | 0   | 0    | volts |
| Grid-No.2 (Screen-Grid) Voltage .....     | 175 | 160  | volts |
| Grid-No.1 (Control-Grid) Voltage .....    | -10 | 0    | volts |
| Plate Current .....                       | 800 | 1400 | mA    |
| Grid-No.2 Current .....                   | 70  | 45   | mA    |

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |       |       |
|---|-------|-------|
| Plate Voltage .....                         | 990   | volts |
| Peak Positive-Pulse Plate Voltage# .....    | 8000  | volts |
| Plate Dissipation .....                     | 40    | watts |
| Grid-No.3 Voltage .....                     | 50    | volts |
| Grid-No.2 Voltage .....                     | 275   | volts |
| Grid-No.2 Input .....                       | 9     | volts |
| Beam Plates Circuit Resistor .....          | 10000 | ohms  |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 650   | volts |
| Bulb Temperatures .....                     | 300   | °C    |

# Pulse duration must not exceed 22% of a horizontal scanning cycle (18 microseconds).

**6LF8**

**HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used in video-amplifier stages of color and black-and-white television receivers. Outlines section, 6E; requires miniature 9-contact socket.

|                                     |          |         |
|-------------------------------------|----------|---------|
| Heater Voltage (ac/dc) .....        | 6.3      | volts   |
| Heater Current .....                | 0.6      | ampere  |
| Heater Warm-up Time (Average) ..... | 11       | seconds |
| Heater-Cathode Voltage:             |          |         |
| Peak value .....                    | ±200 max | volts   |
| Average value .....                 | 100 max  | volts   |

**Direct Interelectrode Capacitances:**

**Triode Unit:**

|   |     |    |
|---|-----|----|
| Grid to Plate .....   | 2.2 | pF |
| Grid to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield .....  | 3.2 | pF |
| Plate to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield ..... | 1.8 | pF |


**Pentode Unit:**

|   |           |    |
|---|-----------|----|
| Grid No.1 to Plate .....  | 0.06 max  | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 10        | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     | 3.6       | pF |
| Pentode Grid No.1 to Triode Plate .....                                       | 0.008 max | pF |
| Pentode Plate to Triode Plate .....   | 0.15 max  | pF |

**Class A Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**



|  |                    |                     |       |
|--|--------------------|---------------------|-------|
|  | <b>Triode Unit</b> | <b>Pentode Unit</b> |       |
| Plate Voltage .....                                    | 330                | 330                 | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....           | —                  | 330                 | volts |
| Grid-No.2 Voltage .....                                | —                  | See curve page 300  |       |
| Grid-No.1 (Control-Grid) Voltage:                      |                    |                     |       |
| Positive-bias value .....                              | 4                  | 0                   | volts |
| Negative-bias value .....                              | -55                | -55                 | volts |
| Grid-No.1 Current .....                                | 8                  | 0                   | mA    |
| Plate Dissipation .....                                | 1.1                | 3.75                | watts |
| Grid-No.2 Input:                                       |                    |                     |       |
| For grid-No.2 voltages up to 165 volts .....           | —                  | 1.1                 | watts |
| For grid-No.2 voltages between 165 and 330 volts ..... | —                  | See curve page 300  |       |



**9DX**

**CHARACTERISTICS**

|  |       |       |                 |        |       |
|--|-------|-------|-----------------|--------|-------|
| Plate Voltage  | 200   | 40    | 75              | 100    | volts |
| Grid-No.2 Voltage                                      | —     | —     | 150             | 150    | volts |
| Grid-No.1 Voltage                                      | —2    | 3     | 0               | -2.5   | volts |
| Amplification Factor                                   | 70    | 40    | —               | —      |       |
| Plate Resistance (Approx.)                             | 17500 | 10000 | —               | 200000 | ohms  |
| Transconductance                                       | 4000  | 4000  | —               | 11000  | μmhos |
| Plate Current  | 4     | 11    | 50 <sup>m</sup> | 20     | mA    |
| Grid-No.2 Current                                      | —     | —     | 12 <sup>m</sup> | 5      | mA    |
| Grid-No.1 Current                                      | 0     | 2.7   | 0               | 0      | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA | -5    | —     | —               | -8     | volts |

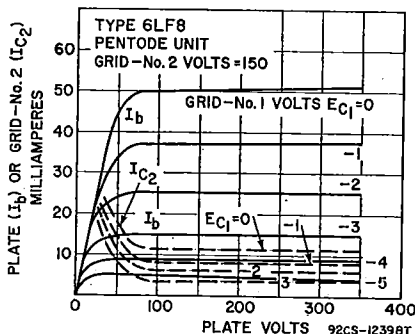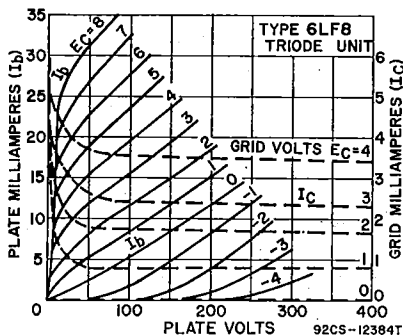

**MAXIMUM CIRCUIT VALUES**

Grid-No.1-Circuit Resistance:  
 For fixed-bias operation .....  
 For cathode-bias operation .....

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

|             |              |        |
|-------------|--------------|--------|
| Triode Unit | Pentode Unit |        |
| 0.5         | 0.25         | megohm |
| 1           | 1            | megohm |

Refer to chart at end of section.


For replacement use type 6LJ6A/6LH6A.

Refer to chart at end of section.

**6LH6A**

**6LJ6**

**6LJ6A/  
6LH6A**



**8MQ**

**BEAM TRIODE**

Glass octal type used for the shunt regulation of high-voltage, low-current power supplies in color and black-and-white television receivers. Outlines section, 21D; requires octal socket. For high-voltage and X-ray safety considerations, refer to page 93.

|                                     |                          |        |
|-------------------------------------|--------------------------|--------|
| Heater Voltage (ac/dc)              | 6.3                      | volts  |
| Heater Current                      | 0.2                      | ampere |
| Heater Cathode Voltage              | + not recommended, -450* | volts  |
| Direct Interelectrode Capacitances: |                          |        |
| Grid to Plate                       | 1                        | pF     |
| Grid to Cathode and Heater          | 2.6                      | pF     |
| Plate to Cathode and Heater         | 1                        | pF     |

\* Series impedance should be used with the cathode to limit the cathode current under prolonged short-circuit conditions to 450 mA.

**Shunt Voltage-Regulator Service**

|  |       |         |
|--|-------|---------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b> |       |         |
| Plate Voltage                                  | 27000 | volts   |
| Negative Grid Voltage                          | 135   | volts   |
| Peak Negative Grid Voltage*                    | 440   | volts   |
| Plate Dissipation                              | 40    | watts   |
| Average Plate Current                          | 1.5   | mA      |
| <b>TYPICAL OPERATION</b>                       |       |         |
| Unregulated DC Supply Voltage                  | 36000 | volts   |
| Equivalent Resistance of Unregulated Supply    | 11    | megohms |

|  |       |       |
|--|-------|-------|
| DC Reference Voltage .....                                 | 200   | volts |
| Equivalent Resistance of Reference Supply .....            | 1000  | ohms  |
| Effective Grid-Plate Transconductance .....                | 200   | μmhos |
| DC Plate Current for Load Current of 0 mA .....            | 1000  | μA    |
| DC Plate Current for Load Current of 1 mA .....            | 45    | μA    |
| Regulated DC Output Voltage for Load Current of 0 mA ..... | 25000 | volts |
| Regulated DC Output Voltage for Load Current of 1 mA ..... | 24500 | volts |

**MAXIMUM CIRCUIT VALUE**

|  |   |         |
|--|---|---------|
| Grid-Circuit Resistance:                                     |   |         |
| For use with "Flyback Transformer" high voltage supply ..... | 3 | megohms |

**X-RADIATION CHARACTERISTIC**

|  |     |       |
|--|-----|-------|
| X-Radiation, Maximum:                                      |     |       |
| Statistical value controlled on a lot sampling basis ..... | 0.5 | mR/hr |

\* For interval of 20 seconds maximum during equipment warm-up period.

Caution—Operation of this tube outside of the maximum values indicated above may result in either temporary or permanent changes in the X-radiation characteristic of the tube. Equipment design must be such that these maximum values are not exceeded.

**6LJ8**

4LJ8, 5LJ8

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used as a combined oscillator and mixer in vhf television receivers. Outlines section, 6B; requires 9-contact socket. Types 4LJ8 and 5LJ8 are identical with type 6LJ8 except for heater ratings.



|                                     |          |          |          |                |
|-------------------------------------|----------|----------|----------|----------------|
|                                     | 4LJ8     | 5LJ8     | 6LJ8     |                |
| Heater Voltage (ac/dc) .....        | 4.3      | 5.6      | 0.4      | volts          |
| Heater Current .....                | 0.6      | 0.45     | —        | ampere seconds |
| Heater Warm-up Time (Average) ..... | 11       | 11       | —        |                |
| Heater-Cathode Voltage:             |          |          |          |                |
| Peak value .....                    | ±200 max | ±200 max | ±200 max | volts          |
| Average value .....                 | 100 max  | 100 max  | 100 max  | volts          |

**Class A<sub>1</sub> Amplifier**

|  |                    |                     |        |
|--|--------------------|---------------------|--------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>               | <b>Triode Unit</b> | <b>Pentode Unit</b> |        |
| Plate Voltage .....  | 280                | 280                 | volts  |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                 | —                  | 280                 | volts  |
| Grid-No.2 Voltage .....                                      | —                  | See curve page 300  | mA     |
| Cathode Current .....  | 20                 | 20                  | volts  |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value .....  | 0                  | 0                   | watts  |
| Plate Dissipation .....                                      | 2                  | 2                   |        |
| Grid-No.2 Input:   |                    | 0.5                 | watts  |
| For grid-No.2 voltages up to 140 volts .....                 | —                  | See curve page 300  |        |
| For grid-No.2 voltages between 140 and 280 volts .....       | —                  |                     |        |
| <b>CHARACTERISTICS</b>                                       |                    |                     |        |
| Plate Voltage .....  | 125                | 125                 | volts  |
| Grid-No.2 Voltage .....                                      | —                  | 125                 | volts  |
| Cathode-Bias Resistor .....                                  | 68                 | 33                  | ohms   |
| Amplification Factor .....                                   | 40                 | —                   |        |
| Plate Resistance (Approx.) .....                             | 5000               | 125000              | ohms   |
| Transconductance .....                                       | 8000               | 13000               | μmhos  |
| Plate Current .....  | —                  | 12                  | mA     |
| Grid-No.2 Current .....                                      | —                  | 3.5                 | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 30 μA ..... | —6.5               | —4                  | volts  |
| <b>MAXIMUM CIRCUIT VALUES</b>                                |                    |                     |        |
| Grid-No.1-Circuit Resistance:                                |                    |                     |        |
| For fixed-bias operation .....                               | 1                  | 0.5                 | megohm |
| For cathode-bias operation .....                             | 0.5                | 0.25                | megohm |

**6LM8****MEDIUM-MU TRIODE—SEMI-  
REMOTE-CUTOFF PENTODE**

Miniature type used in color and black-and-white television receiver applications. The pentode unit is used in burst-amplifier circuits, and the triode unit as a general-purpose amplifier tube. Outlines section, 6B; requires miniature 9-contact socket.

**9GF****9AE**

|   |           |        |
|---|-----------|--------|
| Heater Voltage (ac/dc)  | 6.3       | volts  |
| Heater Current  | 0.46      | ampere |
| Heater-Cathode Voltage:   |           |        |
| Peak value  | ±200 max  | volts  |
| Average value   | 100 max   | volts  |
| Direct Interelectrode Capacitances:   |           |        |
| Triode Unit:  |           |        |
| Grid to Plate   | 1.8       | pF     |
| Grid to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield  | 3.2       | pF     |
| Plate to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield | 1.9       | pF     |
| Pentode Unit:   |           |        |
| Grid No.1 to Plate  | 0.015 max | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield           | 5.5       | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield               | 3.8       | pF     |
| Heater to Cathode (Each Unit)   | 3.2       | pF     |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |                      |
|---|----------------------|
| Plate Voltage   | 330                  |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —                    |
| Grid-No.2 Voltage                                     | — See curve page 300 |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0                    |
| Plate Dissipation                                     | 2.5                  |
| Grid-No.2 Input:                                      |                      |
| For grid-No.2 voltages up to 165 volts                | —                    |
| For grid-No.2 voltages between 165 and 330 volts      | — See curve page 300 |

**Triode Unit Pentode Unit**




|   |     |                    |       |
|---|-----|--------------------|-------|
| Plate Voltage   | 330 | 350                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —   | 330                | volts |
| Grid-No.2 Voltage                                     | —   | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0   | 0                  | volts |
| Plate Dissipation                                     | 2.5 | 2.5                | volts |
| Grid-No.2 Input:                                      |     |                    |       |
| For grid-No.2 voltages up to 165 volts                | —   | 0.55               | watts |
| For grid-No.2 voltages between 165 and 330 volts      | —   | See curve page 300 |       |

**CHARACTERISTICS**

|  |      |        |       |
|--|------|--------|-------|
| Plate Voltage  | 125  | 125    | volts |
| Grid-No.2 Voltage                                      | —    | 125    | volts |
| Grid No.1 Voltage                                      | —1   | —2     | volts |
| Amplification Factor                                   | 46   | —      |       |
| Plate Resistance (Approx.)                             | 5400 | 150000 | ohms  |
| Transconductance                                       | 8500 | 6000   | μmhos |
| Plate Current  | 13.5 | 12     | mA    |
| Grid-No.2 Current                                      | —    | 4      | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | —8   | —14    | volts |

**MAXIMUM CIRCUIT VALUES**

|                               |     |      |        |
|-------------------------------|-----|------|--------|
| Grid-No.1-Circuit Resistance: |     |      |        |
| For fixed-bias operation      | 0.5 | 0.25 | megohm |
| For cathode-bias operation    | 1   | 0.5  | megohm |

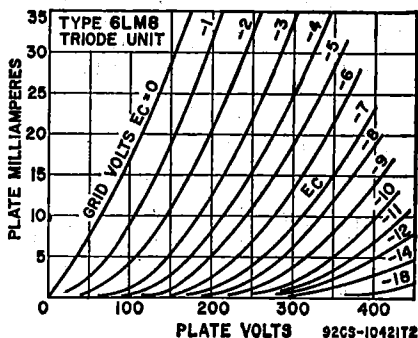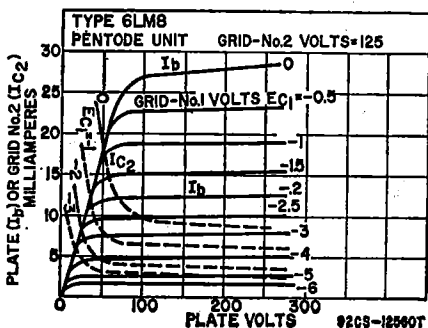

**6LN8/  
SHARP-CUTOFF PENTODE**

**LCF80**

Miniature type used in frequency-changer service in television receivers. Outlines section, 6B; requires miniature 9-contact socket.

|                                   |          |        |
|-----------------------------------|----------|--------|
| Heater Voltage (ac/dc) .....      | 6        | volts  |
| Heater Current .....              | 0.45     | ampere |
| Peak Heater-Cathode Voltage ..... | ±100 max | volts  |

Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values)             | Triode Unit | Pentode Unit |       |
|---|-------------|--------------|-------|
| Plate Supply Voltage .....                          | 550         | 550          | volts |
| Plate Voltage .....                                 | 250         | 250          | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....        | —           | 550          | volts |
| Grid-No.2 Voltage:                                  |             |              |       |
| With cathode current of 14 mA .....                 | —           | 175          | volts |
| With cathode current less than 10 mA .....          | —           | 200          | volts |
| Cathode Current .....                               | 14          | 14           | mA    |
| Plate Dissipation .....                             | 1.5         | 1.7          | watts |
| Grid-No.2 Input:                                    |             |              |       |
| With plate dissipation greater than 1.2 watts ..... | —           | 0.5          | watt  |
| With plate dissipation less than 1.2 watts .....    | —           | 0.75         | watt  |

## CHARACTERISTICS

|   |      |      |        |
|---|------|------|--------|
| Plate Voltage .....                           | 100  | 170  | volts  |
| Grid-No.2 Voltage .....                       | —    | 170  | volts  |
| Grid-No.1 Voltage .....                       | -2   | -2   | volts  |
| Amplification Factor .....                    | 20   | —    |        |
| Mu-Factor, Grid No.2 to Grid No.1 .....       | —    | 47   |        |
| Plate Resistance (Approx.) .....              | —    | 0.4  | megohm |
| Transconductance .....                        | 5000 | 6200 | μmhos  |
| Plate Current .....                           | 14   | 10   | mA     |
| Grid-No.2 Current .....                       | —    | 2.8  | mA     |
| Input Resistance at frequency of 50 MHz ..... | —    | 0.01 | megohm |
| Equivalent Noise Resistance .....             | —    | 1500 | ohms   |

## MAXIMUM CIRCUIT VALUES


|                                  |     |     |        |
|----------------------------------|-----|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |     |        |
| For fixed-bias operation .....   | 0.5 | 0.5 | megohm |
| For cathode-bias operation ..... | 0.5 | 1   | megohm |

## 6LQ6

## 6LQ6/6JE6C

24LQ6, 24LQ6/24JE6C,  
31LQ6

Novar types used as horizontal-deflection amplifier in color and black-and-white television receivers. Outlines section, 32C; requires novar 9-contact socket. Types 24LQ6, 24LQ6/24JE6C, and 31LQ6 are identical with type 6LQ6 except for heater ratings.



9QL

|   | 6LQ6<br>6LQ6/6JE6B | 24LQ6<br>24LQ6/24JE6C | 31LQ6    |         |
|---|--------------------|-----------------------|----------|---------|
| Heater Voltage (ac/dc) .....                                    | 6.3                | 24                    | 31       | volts   |
| Heater Current .....  | 2.3                | 0.6                   | 0.45     | amperes |
| Heater Warm-up Time .....                                       | —                  | 11                    | 11       | seconds |
| Heater-Cathode Voltage:   |                    |                       |          |         |
| Peak value .....  | ±200 max           | ±200 max              | ±200 max | volts   |
| Average value .....   | 100 max            | 100 max               | 100 max  | volts   |
| Direct Interelectrode Capacitances:                             |                    |                       | 0.6      | pF      |
| Grid No.1 to Plate .....  |                    |                       |          |         |
| Grid No.1 to Cathode, Heater, Grid No.2,<br>and Grid No.3 ..... |                    |                       | 22       | pF      |
| Plate to Cathode, Heater, Grid No.2,<br>and Grid No.3 .....     |                    |                       | 11       | pF      |

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|  | Triode*<br>Connection | Pentode Connection |      |       |
|--|-----------------------|--------------------|------|-------|
| Peak Positive-Pulse Plate Voltage# .....             | —                     | 5000               | —    | volts |
| Plate Voltage .....                                  | 145                   | —                  | 60   | 175   |
| Grid-No.3 (Suppressor-Grid) Voltage .....            | —                     | 30                 | 30   | 30    |
| Grid-No.2 (Screen-Grid) Voltage .....                | 145                   | 145                | 145  | 145   |
| Grid-No.1 (Control-Grid) Voltage .....               | -35                   | —                  | 0    | -35   |
| Plate Resistance (Approx.) .....                     | —                     | —                  | —    | 7000  |
| Transconductance .....                               | —                     | —                  | —    | 7500  |
| Plate Current .....                                  | —                     | —                  | 710† | 95    |
| Grid-No.2 Current .....                              | —                     | —                  | 55‡  | 2.4   |
| Grid-No.1 Voltage for plate current<br>of 1 mA ..... | —                     | -125               | —    | -60   |
| Amplification Factor .....                           | 2.8                   | —                  | —    | —     |



\* Grid No.3 and grid No.2 connected, respectively, to cathode and plate at socket.  
 † This value may be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system



**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| Plate Supply Voltage                    | 990  | volts |
| Peak Positive-Pulse Plate Voltage#      | 7500 | volts |
| Peak Negative-Pulse Plate Voltage       | 1100 | volts |
| Grid-No.3 Voltage■                      | 75   | volts |
| Grid-No.2 Voltage                       | 220  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage   | 330  | volts |
| Peak Cathode Current                    | 1200 | mA    |
| Average Cathode Current                 | 350  | mA    |
| Plate Dissipation <sup>o</sup>          | 30   | watts |
| Plate Dissipation (Temporary overload)▲ | 200  | watts |
| Grid-No.2 Input                         | 5    | watts |
| Envelope Temperature (At hottest point) | 250  | °C    |

**MAXIMUM CIRCUIT VALUES**


|  |      |         |
|--|------|---------|
| Grid-No.1-Circuit Resistance:                                    |      |         |
| For grid-No.1-resistor-bias operation                            | 0.47 | megohm  |
| For plate-pulsed operation (horizontal-deflection circuits only) | 10   | megohms |

- # Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).
- For horizontal-deflection service, a positive voltage may be applied to grid-No.3 to minimize "snivets" interference in both vhf and uhf television receivers. A typical value is 30 volts.
- A bias resistor or other means is required to protect the tube in absence of excitation.
- ▲ Total continuous or accumulated time not to exceed 40 seconds.

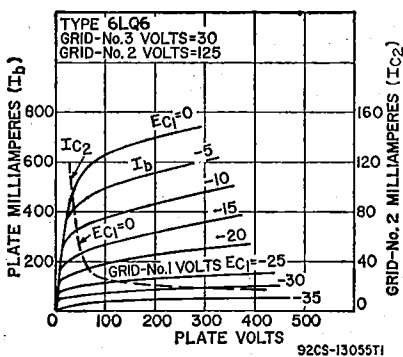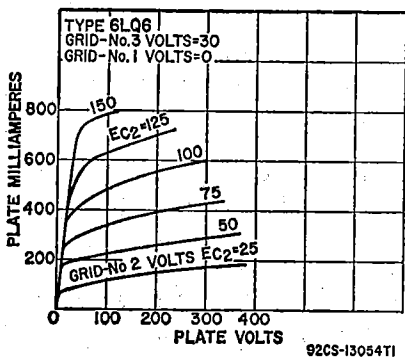

Refer to chart at end of section.

**6LQ6/6JE6B**



9DX

**MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE**

**6LQ8**  
 11LQ8

Miniature type used in color and black-and-white television receiver applications. The pentode unit is used as a video output tube. The triode unit is used in sync separator and sound-if circuits. Outlines section, 6E; requires miniature 9-contact socket. Type 11LQ8 is identical with type 6LQ8 except for heater ratings.

|                         |          |          |         |
|-------------------------|----------|----------|---------|
| Heater Voltage (ac/dc)  | 6LQ8     | 11LQ8    |         |
| Heater Current          | 6.3      | 10.9     | volts   |
| Heater Warm-up Time     | 0.7      | 0.45     | ampere  |
| Heater-Cathode Voltage: |          | 11       | seconds |
| Peak value              | ±200 max | ±200 max | volts   |
| Average value           | 100 max  | 100 max  | volts   |

Direct Interelectrode Capacitances:

|  |           |    |
|--|-----------|----|
| Triode Unit:   |           |    |
| Grid to Plate .....  | 2.8       | pF |
| Grid to Triode Cathode, Pentode Cathode, Heater, Pentode Grid No.3, and Internal Shield .....  | 4.2       | pF |
| Plate to Triode Cathode, Pentode Cathode, Heater, Pentode Grid No.3, and Internal Shield ..... | 2.4       | pF |
| Pentode Unit:  |           |    |
| Grid No.1 to Plate .....   | 0.12 max  | pF |
| Grid No.1 to Cathode Heater, Grid No.2, Grid No.3, and Internal Shield .....                   | 14        | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....                      | 4.8       | pF |
| Triode Grid to Pentode Plate .....   | 0.015 max | pF |
| Pentode Plate to Triode Plate .....  | 0.17 max  | pF |

Class A<sub>1</sub> Amplifier



|   |             |                    |       |
|---|-------------|--------------------|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>              | Triode Unit | Pentode Unit       |       |
| Plate Voltage .....   | 300         | 300                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —           | 300                | volts |
| Grid-No.2 Voltage .....                                     | —           | See curve page 300 | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0           | 0                  | volts |
| Plate Dissipation .....                                     | 2           | 5                  | watts |
| Grid-No.2 Input:  |             |                    |       |
| For grid-No.2 voltages up to 150 volts .....                | —           | 1                  | watts |
| For grid-No.2 voltages between 150 and 300 volts .....      | —           | See curve page 300 |       |

CHARACTERISTICS

|   |             |              |       |
|---|-------------|--------------|-------|
|   | Triode Unit | Pentode Unit |       |
| Plate Supply Voltage .....                                    | 125         | 125 200      | volts |
| Grid-No.2 Supply Voltage .....                                | —           | 125 125      | volts |
| Cathode-Bias Resistor .....                                   | 68          | 82 68        | ohms  |
| Amplification Factor .....                                    | 46          | —            |       |
| Plate Resistance (Approx.) .....                              | 4400        | 55000 75000  | ohms  |
| Transconductance .....  | 10400       | 21000 23000  | μmhos |
| Plate Current .....   | 15          | 16.5 20      | mA    |
| Grid-No.2 Current .....                                       | —           | 3.1 3.5      | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA ..... | -6          | -4.2 -4.2    | volts |

MAXIMUM CIRCUIT VALUES

|                                  |             |              |        |
|----------------------------------|-------------|--------------|--------|
|                                  | Triode Unit | Pentode Unit |        |
| Grid-No.1-Circuit Resistance:    |             |              |        |
| For fixed-bias operation .....   | 0.5         | 0.1          | megohm |
| For cathode-bias operation ..... | 1           | 0.25         | megohm |

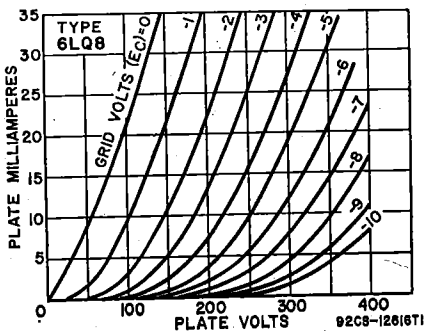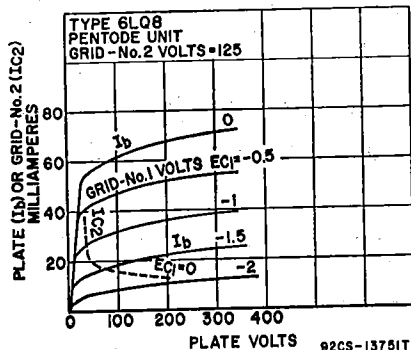


6LR6

35LR6

BEAM POWER TUBE

Duodecar type used as horizontal-deflection amplifier in color and black-and-white television receivers. An integral radiator-fin design dissipates heat uniformly. Outlines section, 16E; requires duodecar 12-contact socket. Type 35LR6 is identical with type 6LR6 except for heater ratings.



12FY

|                               |               |              |         |
|-------------------------------|---------------|--------------|---------|
| Heater Arrangement            | 6LR6 Parallel | 35LR6 Series |         |
| Heater Voltage (ac/dc)        | 6.3           | 35           | volts   |
| Heater Current                | 2.5           | 0.45±0.03    | amperes |
| Heater Warm-up Time (Average) | —             | 11           | seconds |
| Heater-Cathode Voltage:       |               |              |         |
| Peak value                    | ±200 max      | ±200 max     | volts   |
| Average value                 | 100 max       | 100 max      | volts   |

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                                       | Triode†† Connection |        | Pentode Connection   |           |       |
|---|---------------------|--------|----------------------|-----------|-------|
|   |                     |        |                      |           |       |
| Plate Voltage   | 125                 | 60     | 175                  | 60        | volts |
| Grid-No.3 (Suppressor Grid) Voltage                   | —                   | —      | Connected to cathode | at socket |       |
| Grid-No.2 (Screen-Grid) Voltage                       | 125                 | 115    | 110                  | 110       | volts |
| Grid-No.1 (Control-Grid) Voltage                      | -20                 | 0      | -20                  | 0         | volts |
| Plate Resistance (Approx.)                            | —                   | —      | 5300                 | —         | ohms  |
| Transconductance (Grid No.1 to Plate)                 | —                   | —      | 16000                | —         | μmhos |
| Plate Current   | —                   | 740†   | 140                  | 700       | mA    |
| Grid-No.2 Current                                     | —                   | 38†    | 2.4                  | 35        | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | —                   | —      | -42                  | —         | volts |
| Ratio (Plate Current/G <sub>1</sub> No.2 Current)     | —                   | 19.5:1 | —                    | 20:1      |       |
| Triode Amplification Factor                           | 3.5                 | —      | —                    | —         |       |

† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.  
 †† Grid No. 2 connected to plate.

**Horizontal-Deflection Amplifier**


For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |      |       |
|--|------|-------|
| DC Plate Supply Voltage                              | 990  | volts |
| Peak Positive-Plate Pulse Voltage (Absolute Maximum) | 7500 | volts |
| Peak Negative-Pulse Plate Voltage                    | 1100 | volts |
| Positive Grid-No.3 Voltage                           | 75   | volts |
| DC Grid-No.2 Voltage                                 | 220  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage                | 330  | volts |
| Average Cathode Current                              | 375  | mA    |
| Peak Cathode Current                                 | 1300 | mA    |
| Plate Dissipation                                    | 30   | watts |
| Grid-No.2 Input                                      | 5    | watts |
| Bulb Temperature (At hottest point)                  | 250  | °C    |

**MAXIMUM CIRCUIT VALUES**

|   |      |        |
|---|------|--------|
| Grid-No.1-Circuit Resistance:             |      |        |
| Bias feedback high-voltage regulation     | 0.47 | megohm |
| DC or pulse shunt high-voltage regulation | 10   | megohm |



9QT

**HIGH-MU TRIODE—  
BEAM POWER TUBE**

**6LR8**

21LR8, 31LR8

Novar type used in combined vertical-deflection-oscillator and vertical-deflection-amplifier applications in color and black-and-white television receivers. Outlines section, 17E; requires novar 9-contact socket. Types 21LR8 and 31LR8 are identical with type 6LR8 except for heater ratings.

|                         |          |          |          |         |
|-------------------------|----------|----------|----------|---------|
|                         | 6LR8     | 21LR8    | 31LR8    |         |
| Heater Voltage          | 6.3      | 21       | 31.5     | volts   |
| Heater Current          | 1.5      | 0.45     | 0.3      | ampere  |
| Heater Warm-up Time     | —        | 11       | 11       | seconds |
| Heater-Cathode Voltage: |          |          |          |         |
| Peak value              | ±200 max | ±200 max | ±200 max | volts   |
| Average value           | 100 max  | 100 max  | 100 max  | volts   |

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                  | Triode Unit |     | Beam Power Unit |     |       |
|----------------------------------|-------------|-----|-----------------|-----|-------|
|                                  |             |     |                 |     |       |
| Plate Voltage                    | 250         | 45  | 135             | 120 | volts |
| Grid-No.2 (Screen-Grid) Voltage  | —           | 125 | 120             | 120 | volts |
| Grid-No.1 (Control-Grid) Voltage | -4          | 0   | -10             | -10 | volts |
| Amplification Factor             | 58          | —   | —               | 6.5 |       |
| Plate Resistance (Approx.)       | 14000       | —   | 14000           | —   | ohms  |

|  |      |                  |      |   |            |
|--|------|------------------|------|---|------------|
| Transconductance .....                 | 4100 | —                | 9200 | — | $\mu$ mhos |
| Plate Current .....                    | 2.6  | 200 <sup>m</sup> | 51   | — | mA         |
| Grid-No.2 Current .....                | —    | 200 <sup>m</sup> | 3    | — | mA         |
| Grid-No.1 Voltage:                     |      |                  |      |   |            |
| For plate current of 10 $\mu$ A .....  | -6.6 | —                | —    | — | volts      |
| For plate current of 100 $\mu$ A ..... | —    | —                | -28  | — | volts      |
| For plate current of 1 mA .....        | —    | —                | -24  | — | volts      |

\* Triode connection, Grid No.2 connected to plate at socket.

† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

### Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Maximum Values)     | Triode Unit | Beam Power Unit |       |
|---|-------------|-----------------|-------|
|   | Oscillator. | Amplifier       |       |
| Plate Voltage .....                         | 400         | 400             | volts |
| Grid-No.2 Voltage .....                     | —           | 300             | volts |
| Peak Positive-Pulse Plate Voltage# .....    | —           | 2500            | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 400         | 250             | volts |
| Peak Cathode Current .....                  | 105         | 260             | mA    |
| Average Cathode Current .....               | 30          | 75              | mA    |
| Peak Power Output .....                     | 2.5         | —               | watts |
| Plate Dissipation‡ .....                    | 2.5         | 14              | watts |
| Grid-No.2 Input‡ .....                      | —           | 2.75            | watts |
| Bulb Temperature .....                      | —           | 210             | °C    |

#### MAXIMUM CIRCUIT VALUES

|                                  |     |     |         |
|----------------------------------|-----|-----|---------|
| Grid-No.1-Circuit Resistance:    |     |     |         |
| For fixed-bias operation .....   | —   | 1   | megohm  |
| For cathode-bias operation ..... | 2.2 | 2.2 | megohms |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).


‡ A bias resistor or other means is required to protect the tube in absence of excitation.

## 6LT8

8LT8, 11LT8

### TWIN DIODE— SHARP-CUTOFF PENTODE

Miniature type used in television receiver applications. The pentode unit is used in low-frequency horizontal-oscillator applications. The diode units are used in horizontal afc discriminator circuits. Outlines section, 6B; requires miniature 9-contact socket. Types 8LT8 and 11LT8 are identical with type 6LT8 except for heater ratings.



SRL

|                                     | 6LT8     | 8LT8     | 11LT8    |         |
|-------------------------------------|----------|----------|----------|---------|
| Heater Voltage .....                | 6.3      | 8.1      | 11.4     | volts   |
| Heater Current .....                | 0.6      | 0.45     | 0.315    | ampere  |
| Heater Warm-up Time (Average) ..... | 11       | 11       | 11       | seconds |
| Heater-Cathode Voltage:             |          |          |          |         |
| Peak value .....                    | ±200 max | ±200 max | ±200 max | volts   |
| Average value .....                 | 100 max  | 100 max  | 100 max  | volts   |

#### Pentode Unit as Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values)                     |  |                    |
|---|--|--------------------|
| Plate Voltage .....   |  | 330 volts          |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                |  | 330 volts          |
| Grid-No.2 Voltage .....                                     |  | See curve page 300 |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... |  | 0 volts            |
| Plate Dissipation .....                                     |  | 3.1 watts          |
| Grid-No.2 Input:  |  |                    |
| For grid-No 2 voltages up to 165 volts .....                |  | 0.65 watt          |
| For grid-No.2 voltages between 165 and 33 volts .....       |  | See curve page 300 |


#### CHARACTERISTICS

|                                   |                     |            |
|-----------------------------------|---------------------|------------|
| Plate Voltage .....               | 125                 | volts      |
| Grid No.3 (Suppressor Grid) ..... | Connected to ground | volts      |
| Grid-No.2 Voltage .....           | 125                 | volts      |
| Cathode-Bias Resistor .....       | 56                  | ohms       |
| Plate Resistance (Approx.) .....  | 20000               | ohms       |
| Transconductance .....            | 13000               | $\mu$ mhos |

|   |      |        |
|---|------|--------|
| Plate Current .....   | 10   | mA     |
| Grid-No.2 Current .....   | 3.4  | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A ..... | -3.5 | volts  |
| <b>MAXIMUM CIRCUIT VALUE</b>                                      |      |        |
| Grid-No.1-Circuit Resistance, for cathode-bias operation .....    | 1    | megohm |

**Diode Unit (Each Unit)**

|  |   |       |
|--|---|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>     |   |       |
| Plate Current (Continuous Operation) .....         | 5 | mA    |
| <b>CHARACTERISTICS, Instantaneous Value</b>        |   |       |
| Tube Voltage Drop for plate current of 20 mA ..... | 5 | volts |



12DZ

**HIGH-MU TRIODE—  
BEAM POWER TUBE**

**6LU8**

16LU8A, 21LU8

Duodecar type used as a combined vertical-deflection oscillator and vertical-deflection amplifier in color television receivers. Outlines section, 15D; requires duodecar 12-contact socket. Types 16LU8A and 21LU8 are identical with type 6LU8 except for heater ratings.

|                                     | 6LU8          | 16LU8A        | 21LU8         |         |
|-------------------------------------|---------------|---------------|---------------|---------|
| Heater Voltage .....                | 6.3           | 16            | 21            | volts   |
| Heater Current .....                | 1.5           | 0.6           | 0.45          | amperes |
| Heater Warm-up Time (Average) ..... | —             | 11            | 11            | seconds |
| <b>Heater-Cathode Voltage:</b>      |               |               |               |         |
| Peak value .....                    | $\pm 200$ max | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....                 | 100 max       | 100 max       | 100 max       | volts   |

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                        | Triode Unit |                 | Beam Power Unit |                 |            |
|--|-------------|-----------------|-----------------|-----------------|------------|
|  | Triode Unit | Beam Power Unit | Triode Unit     | Beam Power Unit |            |
| Plate Voltage .....                    | 250         | 45              | 135             | 120             | volts      |
| Grid-No.2 (Screen-Grid) Voltage .....  | —           | 125             | 120             | 120*            | volts      |
| Grid-No.1 (Control-Grid) Voltage ..... | -4          | 0               | -10             | -10             | volts      |
| Amplification Factor .....             | 58          | —               | —               | 6.5             |            |
| Plate Resistance (Approx.) .....       | 16000       | —               | 12000           | —               | ohms       |
| Transconductance .....                 | 3600        | —               | 9300            | —               | $\mu$ mhos |
| Plate Current .....                    | 2.3         | 200**           | 56              | —               | mA         |
| Grid-No.2 Current .....                | —           | 20**            | 3               | —               | mA         |
| <b>Grid-No.1 Voltage (Approx.):</b>    |             |                 |                 |                 |            |
| For plate current of 10 $\mu$ A .....  | -6.6        | —               | —               | —               | volts      |
| For plate current of 100 $\mu$ A ..... | —           | —               | -30             | —               | volts      |
| For plate current of 1 mA .....        | —           | —               | -26             | —               | volts      |

- \* Triode connection, Grid No.2 connected to plate at socket.
- \*\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Vertical-Deflection Oscillator and Amplifier**

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Maximum Values)     | Triode Unit | Beam Power Unit |              |
|---|-------------|-----------------|--------------|
|   | Oscillator  | Amplifier       |              |
| Plate Voltage .....                         | 400         | 400             | volts        |
| Grid-No.2 Voltage .....                     | —           | 300             | volts        |
| Peak Positive-Pulse Plate Voltage# .....    | —           | 2500            | volts        |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 400         | 250             | volts        |
| Plate Dissipation* .....                    | 2.5         | 14              | watts        |
| Peak Cathode Current .....                  | 105         | 260             | mA           |
| Average Cathode Current .....               | 30          | 75              | mA           |
| Grid-No.2 Input .....                       | —           | 2.75            | watts        |
| Bulb Temperature (At hottest point) .....   | —           | 210             | $^{\circ}$ C |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |     |         |
|----------------------------------|-----|-----|---------|
| <b>Grid-Circuit Resistance:</b>  |     |     |         |
| For fixed-bias operation .....   | —   | 1   | megohm  |
| For cathode-bias operation ..... | 2.2 | 2.2 | megohms |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

\* A bias resistor or other means is required to protect the tube in absence of excitation.


Refer to type 6JW8/ECF802.

**6LX8/LCF802**

## 6LY8

HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receiver applications. The pentode unit is used as a video amplifier, and the triode unit for general-purpose use. Outlines section, 6E; requires 9-contact socket. Heater: volts (ac/dc), 6.3; amperes, 0.75; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.



9DX

Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values)                 | Triode Unit | Pentode Unit       |        |       |
|---|-------------|--------------------|--------|-------|
| Plate Voltage   | 330         | 330                | volts  |       |
| Grid-No.2 (Screen-Grid) Supply Voltage                  | —           | 330                | volts  |       |
| Grid-No.2 Voltage                                       | —           | See curve page 300 |        |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value   | 0           | 0                  | volts  |       |
| Plate Dissipation                                       | 1           | 5                  | watts  |       |
| Grid-No.2 Input:  |             |                    |        |       |
| For grid-No.2 voltages up to 165 volts                  | —           | 1.1                | watts  |       |
| For grid-No.2 voltages between 165 and 330 volts        | —           | See curve page 300 |        |       |
| <b>CHARACTERISTICS</b>                                  |             |                    |        |       |
| Plate Voltage   | 250         | 35                 | 200    | volts |
| Grid-No.2 Voltage                                       | —           | 100                | 100    | volts |
| Grid-No.1 Voltage                                       | -2.0        | 0                  | —      | volts |
| Cathode-Bias Resistor                                   | —           | —                  | 82     | ohms  |
| Amplification Factor                                    | 100         | —                  | —      |       |
| Plate Resistance (Approx.)                              | 69000       | —                  | 60000  | ohms  |
| Transconductance  | 1700        | —                  | 20000  | μmhos |
| Plate Current   | 1.0         | 54                 | 19.5   | mA    |
| Grid-No.2 Current                                       | —           | 13.5               | 3      | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA       | -5          | —                  | —      | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | —           | —                  | -6.3   | volts |
| <b>MAXIMUM CIRCUIT VALUES</b>                           |             |                    |        |       |
| Grid-No.1-Circuit Resistance:                           |             |                    |        |       |
| For fixed-bias operation                                | 0.5         | 0.5                | megohm |       |
| For cathode-bias operation                              | 1           | 1                  | megohm |       |


## 6LZ6

Refer to chart at end of section.

## 6M11

HIGH-MU TWIN TRIODE—  
SHARP-CUTOFF PENTODE

Duodecar type used in television receiver applications. The triode units are used in sync-separator and agc-amplifier circuits; the pentode unit is used in if-amplifier circuits. Outlines section, 8B; requires duodecar 12-contact socket.




12CA

|  |               |        |
|--|---------------|--------|
| Heater Voltage (ac/dc)   | 6.3           | volts  |
| Heater Current   | 0.77          | ampere |
| Heater-Cathode Voltage:  |               |        |
| Peak value   | $\pm 200$ max | volts  |
| Average value  | 100 max       | volts  |
| Direct Interelectrode Capacitances:**  |               |        |
| Triode Units:  |               |        |
| Grid to Plate  | 1.8           | pF     |
| Grid to Triode Cathode, Pentode Cathode, Heater, Pentode Grid No.3, and Internal Shield  | 3.4           | pF     |
| Plate to Triode Cathode, Pentode Cathode, Heater, Pentode Grid No.3, and Internal Shield | 0.8           | pF     |
| Pentode:   |               |        |
| Grid No.1 to Plate   | 0.03          | pF     |
| Grid No.1 to Cathode, Grid No.2, Grid No.3, and Internal Shield                          | 12            | pF     |
| Plate to Cathode, Grid No.2, Grid No.3, and Internal Shield                              | 2.8           | pF     |

\*\* With external shield connected to pentode cathode, grid No.3, and internal shield.

Class A<sub>1</sub> Amplifier

|  | Each<br>Triode Unit | Pentode Unit       |        |
|--|---------------------|--------------------|--------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>           |                     |                    |        |
| Plate Voltage  | 330                 | 330                | volts  |
| Grid-No.2 (Screen-Grid) Supply Voltage                   | —                   | 330                | volts  |
| Grid-No.2 Voltage  | —                   | See curve page 300 |        |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value    | 0                   | 0                  | volts  |
| Plate Dissipation  | 2.25                | 3.1                | watts  |
| Grid-No.2 Input:   |                     |                    |        |
| For voltages up to 165 volts                             | —                   | 0.65               | watt   |
| For voltages between 165 and 330 volts                   | —                   | See curve page 300 |        |
| <b>CHARACTERISTICS</b>                                   |                     |                    |        |
| Plate Supply Voltage                                     | 125                 | 125                | volts  |
| Grid-No.2 Supply Voltage                                 | —                   | 125                | volts  |
| Cathode-Bias Resistor                                    | 125                 | 56                 | ohms   |
| Amplification Factor                                     | 58                  | —                  |        |
| Plate Resistance (Approx.)                               | 7250                | 200000             | ohms   |
| Transconductance   | 8000                | 13000              | μmhos  |
| Plate Current  | 8                   | 11                 | mA     |
| Grid-No.2 Current  | —                   | 3.4                | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA   | —                   | —3.5               | volts  |
| Grid-No.1 Voltage (Approx.) for plate current of 50 μA   | —4.5                | —                  | volts  |
| <b>MAXIMUM CIRCUIT VALUES</b>                            |                     |                    |        |
| Grid-No.1-Circuit Resistance, for cathode-bias operation | 0.68                | 1                  | megohm |



HIGH-MU TRIODE  
SHARP-CUTOFF PENTODE

6MB8  
5MB8

Miniature type with frame-grid pentode unit used in color television receivers. The triode unit is used in video-amplifier applications. The pentode unit is used in burst-amplifier service. Outlines section, 6B; requires miniature 9-contact socket. Type 5MB8 is identical with type 6MB8 except for heater ratings.

|                         | 5MB8<br>Series | 6MB8<br>Parallel |         |
|-------------------------|----------------|------------------|---------|
| Heater Arrangement      |                |                  |         |
| Heater Voltage (ac/dc)  | 4.5            | 6.3              | volts   |
| Heater Current          | 0.45           | 0.4              | ampere  |
| Heater Warm-up Time     | 11             | —                | seconds |
| Heater-Cathode Voltage: |                |                  |         |
| Peak value              | ±200 max       | ±200 max         | volts   |
| Average value           | 100 max        | 100 max          | volts   |

Class A<sub>1</sub> Amplifier


|   | Triode Unit | Pentode Unit       |        |
|---|-------------|--------------------|--------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>        |             |                    |        |
| Plate Voltage   | 280         | 280                | volts  |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —           | 280                | volts  |
| Grid-No.2 Pulse Voltage                               | —           | 300                | volts  |
| Grid-No.2 Voltage                                     | —           | See curve page 300 |        |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0                  | volt   |
| Plate Dissipation                                     | 2           | 2                  | watts  |
| Cathode Current                                       | 20          | 20                 | mA     |
| Grid-No.2 Input                                       | —           | 0.5                | watt   |
| <b>CHARACTERISTICS</b>                                |             |                    |        |
| Plate Voltage   | 125         | 125                | volts  |
| Grid-No.2 Voltage                                     | —           | 125                | volts  |
| Grid-No.1 Voltage                                     | 0           | 0                  | volt   |
| Cathode-Bias Resistor                                 | 68          | 33                 | ohm    |
| Plate Current   | 13          | 10                 | mA     |
| Grid-No.2 Current                                     | —           | 2.8                | mA     |
| Transconductance                                      | 8000        | 12000              | μmhos  |
| Amplification Factor                                  | 40          | —                  |        |
| Plate Resistance (Approx.)                            | 5000        | 125000             | ohms   |
| Grid-No.1 Voltage for plate current of 100 μA         | —5          | —                  | volts  |
| Grid-No.1 Voltage for plate current of 50 μA          | —           | —3                 | volts  |
| <b>MAXIMUM CIRCUIT VALUES</b>                         |             |                    |        |
| Grid-No.1-Circuit Resistance:                         |             |                    |        |
| For fixed-bias operation                              | 0.5         | 0.25               | megohm |
| For cathode-bias operation                            | 1           | 0.5                | megohm |

# 6MD8

12MD8

## MEDIUM-MU TRIPLE TRIODE

Novar type used in matrixing circuits of color and black-and-white television receivers. Outlines section, 11E; requires novar 9-contact socket. Type 12MD8 is identical with type 6MD8 except for heater ratings.



|   | 6MD8      |           | 12MD8     |         |
|---|-----------|-----------|-----------|---------|
| Heater Arrangement                            | Parallel  |           | Series    |         |
| Heater Voltage (ac/dc)                        | 6.3       |           | 12.6      | volts   |
| Heater Current                                | 0.9       |           | 0.45      | ampere  |
| Heater Warm-up Time (Average)                 | —         |           | 11        | seconds |
| Heater-Cathode Voltage:                       |           |           |           |         |
| Peak value                                    | ±200 max  |           | ±200 max  | volts   |
| Average value                                 | 100 max   |           | 100 max   | volts   |
|   | Unit No.1 | Unit No.2 | Unit No.3 |         |
| Direct Interelectrode Capacitances (Approx.): |           |           |           |         |
| Grid to Plate                                 | 3         | 3         | 3         | pF      |
| Grid to Cathode and Heater                    | 3.6       | 3.6       | 3.4       | pF      |
| Plate to Cathode and Heater                   | 0.48      | 0.48      | 0.36      | pF      |


### Class A<sub>1</sub> Amplifier (Each Unit)

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                   |     |       |
|-----------------------------------|-----|-------|
| Plate Voltage                     | 330 | volts |
| Grid Voltage, Positive-bias value | 0   | volts |
| Plate Dissipation                 | 3   | watts |

#### CHARACTERISTICS

|                            |       |       |
|----------------------------|-------|-------|
| Plate Voltage              | 250   | volts |
| Grid Voltage               | -10.5 | volts |
| Amplification Factor       | 17    |       |
| Plate Resistance (Approx.) | 5500  | ohms  |

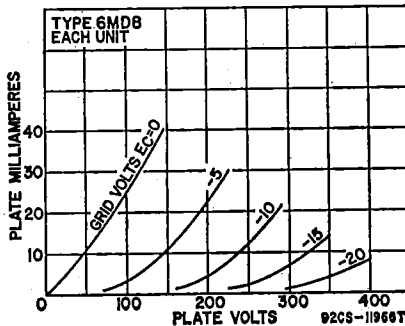

|   |      |       |
|---|------|-------|
| Transconductance                                  | 3100 | μmhos |
| Plate Current                                     | 11.5 | mA    |
| Plate Current for grid voltage of -14 volts       | 4    | mA    |
| Grid Voltage (Approx.) for plate current of 50 μA | -23  | volts |


#### MAXIMUM CIRCUIT VALUE

|   |   |        |
|---|---|--------|
| Grid-Circuit Resistance, for fixed-bias operation | 1 | megohm |
|---|---|--------|

# 6ME6

## BEAM POWER TUBE

Novar types used as horizontal-deflection amplifier in color and black-and-white television receivers. Outlines section, 32C; require novar 9-contact socket.





|   |          |         |
|---|----------|---------|
| Heater Voltage (ac/dc) .....                                    | 6.3 ±0.6 | volts   |
| Heater Current .....  | 2.3      | amperes |
| Heater-Cathode Voltage:   |          |         |
| Peak value .....  | ±200 max | volts   |
| Average value .....   | 100 max  | volts   |
| Direct Interelectrode Capacitances:                             |          |         |
| Grid No.1 to Plate .....  | 0.6      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2,<br>and Grid No.3 ..... | 22       | pF      |
| Plate to Cathode, Heater, Grid No.2,<br>and Grid No.3 .....     | 11       | pF      |

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                                      | Triode*<br>Connection |      | Pentode Connection |      |       |
|--|-----------------------|------|--------------------|------|-------|
| Peak Positive-Pulse Plate Voltage#                   | —                     | 5000 | —                  | —    | volts |
| Plate Voltage .....                                  | 125                   | —    | 55                 | 175  | volts |
| Grid-No.3 (Suppressor-Grid)<br>Voltage .....         | —                     | 0    | 30                 | 30   | volts |
| Grid-No.2 (Screen-Grid) Voltage ..                   | 125                   | 125  | 125                | 125  | volts |
| Grid-No.1 (Control-Grid) Voltage ..                  | —25                   | —    | 0                  | —25  | volts |
| Plate Resistance (Approx.) .....                     | —                     | —    | —                  | 5800 | ohms  |
| Transconductance .....                               | —                     | —    | —                  | 9600 | μmhos |
| Plate Current .....                                  | —                     | —    | 580‡               | 130  | mA    |
| Grid-No.2 Current .....                              | —                     | —    | 40‡                | 2.8  | mA    |
| Grid-No.1 Voltage for plate current<br>of 1 mA ..... | —                     | —125 | —                  | —44  | volts |
| Amplification Factor .....                           | 3.5                   | —    | —                  | —    |       |

\* Grid No.3 and grid No.2 connected, respectively, to cathode and plate at socket.

‡ This value may be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| Plate Supply Voltage .....                    | 990  | volts |
| Peak Positive-Pulse Plate Voltage# .....      | 7600 | volts |
| Peak Negative-Pulse Plate Voltage .....       | 1100 | volts |
| Grid-No.3 Voltage* .....                      | 75   | volts |
| Grid-No.2 Voltage .....                       | 220  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage .....   | 330  | volts |
| Peak Cathode Current .....                    | 1200 | mA    |
| Average Cathode Current .....                 | 350  | mA    |
| Plate Dissipation° .....                      | 30   | watts |
| Plate Dissipation (Temporary overload)▲ ..... | 200  | watts |
| Grid-No.2 Input .....                         | 5    | watts |
| Envelope Temperature (At hottest point) ..... | 250  | °C    |

**MAXIMUM CIRCUIT VALUES**

|  |      |         |
|--|------|---------|
| Grid-No.1-Circuit Resistance for Cathode Bias<br>(with min. R <sub>k</sub> = 100Ω) ..... | 1.0  | megohm  |
| Grid-leak Bias (with signal peak clamped to zero bias) .....                             | 10.0 | megohms |
| Fixed Bias (where positive grid current is not drawn) .....                              | 0.47 | megohm  |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

° For horizontal-deflection service, a positive voltage may be applied to grid-No.3 to minimize "snivets" interference in both vhf and uhf television receivers. A typical value is 30 volts.


▲ A bias resistor or other means is required to protect the tube in absence of excitation.

▲ Total continuous or accumulated time not to exceed 40 seconds.

**TWO-PLATE  
BEAM-DEFLECTION TUBE**

**6ME8**

Miniature type used for color-demodulator applications in color television receivers and a variety of other switching and gate applications. Outlines section, 6E; requires miniature 9-contact socket. Pin 5 should be connected directly to ground. The 6ME8 should be so located in the equipment that it is not subjected to stray magnetic fields.



|                              |     |        |
|------------------------------|-----|--------|
| Heater Voltage (ac/dc) ..... | 6.3 | volts  |
| Heater Current .....         | 0.3 | ampere |

## Direct Interelectrode Capacitances:

|  |          |    |
|--|----------|----|
| Grid No.1 to All Other Electrodes Except Plates .....        | 7.5      | pF |
| Grid No.1 to All Other Electrodes Except Plates .....        | 6        | pF |
| Either Plate to All Other Electrodes .....                   | 6        | pF |
| Either Deflecting Electrode to All Other Electrodes .....    | 6        | pF |
| Plate No.1 to Plate No.2 .....                               | 0.4      | pF |
| Deflecting Electrode No.1 to Deflecting Electrode No.2 ..... | 0.4      | pF |
| Grid No.1 to Deflecting Electrode No.1 .....                 | 0.07 max | pF |
| Grid No.1 to Deflecting Electrode No.2 .....                 | 0.1 max  | pF |


## Color TV Demodulator

## MAXIMUM RATINGS (Design-Maximum Values)

|   |      |       |
|---|------|-------|
| Plate Voltage (Each Plate) .....                            | 400  | volts |
| Peak Deflecting-Electrode Voltage (Each Electrode) .....    | ±200 | volts |
| Deflecting-Electrode Voltage (Each Electrode) .....         | 100  | volts |
| Grid-No.3 (Accelerating-Grid) Voltage .....                 | 400  | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0    | volts |
| Cathode Current .....                                       | 30   | mA    |
| Plate Dissipation (Each Plate) .....                        | 2    | watts |
| Grid-No.3 Input .....                                       | 2    | watts |

## MAXIMUM CIRCUIT VALUES



|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.1  | megohm |
| For cathode-bias operation ..... | 0.25 | megohm |

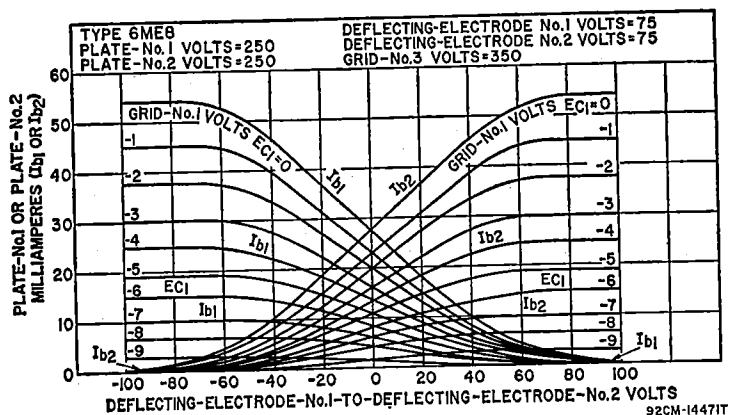Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|   |                         |       |
|---|-------------------------|-------|
| Plate-No.2 Supply Voltage .....   | 250                     | volts |
| Plate No.2 .....  | Connected to Plate No.1 |       |
| Plate-No.1 Supply Voltage .....   | 250                     | volts |
| Grid-No.3 Supply Voltage .....  | 350                     | volts |
| Grid-No.1 Supply Voltage .....  | 0                       | volts |
| Deflecting-Electrode-No.2 Supply Voltage .....  | 75                      | volts |
| Deflecting-Electrode-No.1 Supply Voltage .....  | 75                      | volts |
| Cathode-Bias Resistor .....   | 390                     | ohms  |
| Transconductance, Grid No.1 to both plates .....  | 4400                    | μmhos |
| Total Plate Current .....   | 14.5                    | mA    |
| Grid-No.3 Current .....   | 0.7                     | mA    |
| Grid-No.1 Voltage for total plate current of 10 μA .....  | -16                     | volts |
| Deflecting-Electrode Switching Voltage* .....   | 30 max                  | volts |
| Voltage Difference between Deflecting Electrodes for equal plate currents .....   | 0                       | volts |
| Plate-No.1 Current with Deflecting-Electrode-No.1 Voltage = 65V and Deflecting-Electrode-No.2 Voltage = 95V .....                 | 1.3 max                 | mA    |
| Plate-No.2 Current with Deflecting-Electrode-No.1 Voltage = 95V and Deflecting-Electrode-No.2 Voltage = 55V .....                 | 1.3 max                 | mA    |
| Deflecting-Electrode-No.1 Current with Deflecting-Electrode-No.1 Voltage = 125V and Deflecting-Electrode-No.2 Voltage = 25V ..... | 0.04 max                | mA    |
| Deflecting-Electrode-No.2 Current with Deflecting-Electrode-No.1 Voltage = 25V and Deflecting-Electrode-No.2 Voltage = 125V ..... | 0.04 max                | mA    |

\* Defined as the total voltage change from 75 volts on either deflecting electrode with an equal and opposite change on the other deflecting electrode required to switch the plate current from one plate to the other.

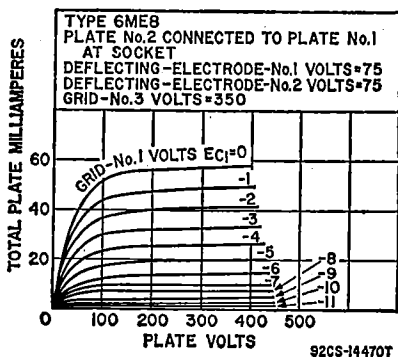

12DZ

**HIGH-MU TRIODE—  
BEAM POWER TUBE**

**6MF8  
15MF8**

Duodecar type used in combined vertical-deflection-oscillator and vertical-deflection-amplifier applications in color television receivers. Outlines section, 15D; requires duodecar 12-contact socket. Type 15MF8 is identical with type 6MF8 except for heater ratings.

|                         |             |               |         |
|-------------------------|-------------|---------------|---------|
| Heater Voltage .....    | 6MF8<br>6.3 | 15MF8<br>14.7 | volts   |
| Heater Current .....    | 1.4         | 0.6           | amperes |
| Heater-Cathode Voltage: |             |               |         |
| Peak value .....        | ±200 max    | ±200 max      | volts   |
| Average value .....     | 100 max     | 100 max       | volts   |

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                        | Triode Unit | Beam Power Unit |      |       |
|--|-------------|-----------------|------|-------|
|  | 250         | 60              | 250  |       |
| Plate Voltage .....                    | —           | 250             | 250  | volts |
| Grid-No.2 (Screen-Grid) Voltage .....  | —4          | 0               | —20  | volts |
| Grid-No.1 (Control-Grid) Voltage ..... | 2.6         | 200             | 50   | mA    |
| Plate Current .....                    | —           | 20              | 3.5  | mA    |
| Grid-No.2 Current .....                | 4100        | —               | 4100 | μmhos |
| Transconductance .....                 | 58          | —               | —    |       |
| Amplification Factor .....             | 14000       | —               | 5000 | ohms  |
| Plate Resistance (Approx.) .....       | —           | —               | —    |       |
| Grid-No.1 Voltage for plate current    | —           | —               | —    |       |
| of 10 μA .....                         | —6.6        | —               | —    | volts |
| Grid-No.1 Voltage for plate current    | —           | —               | —    |       |
| of 100 μA .....                        | —           | —               | —65  | volts |

**Vertical-Deflection Oscillator and Amplifier**

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Maximum Values)  | Triode Unit | Beam Power |       |
|--|-------------|------------|-------|
|  | Oscillator  | Amplifier  |       |
| Plate Voltage .....                      | 400         | 400        | volts |
| Peak Positive Pulse Plate Voltage# ..... | —           | 2500       | volts |
| Grid-No.2 Voltage .....                  | —           | 300        | volts |
| Peak Negative Grid-No.1 Voltage .....    | 400         | —          | volts |
| Plate Dissipation* .....                 | 2.5         | 12         | watts |
| Grid-No.2 Dissipation* .....             | —           | 2.75       | watts |
| Average Cathode Current .....            | 30          | 75         | mA    |
| Peak Cathode Current .....               | 105         | 260        | mA    |
| Peak Power Output .....                  | 2.5         | —          | watts |
| Bulb Temperature .....                   | —           | 200        | °C    |

**MAXIMUM CIRCUIT VALUES**


|                            |     |     |         |
|----------------------------|-----|-----|---------|
| Grid Circuit Resistance:   | —   | 1   | megohm  |
| For fixed-bias operation   | 2.2 | 2.2 | megohms |
| For cathode-bias operation |     |     |         |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).  
 \* A bias resistor or other means is required to protect the tube in absence of excitation.

**6MG8**

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used in horizontal-deflection circuits and for agc-amplifier or sync-separator applications in television receivers. Outlines section, 6B; requires miniature 9-contact socket. Heater: volts, 6.3; ampere, 0.45; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.



9DC

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                                   | Triode Unit | Pentode Unit |            |
|---|-------------|--------------|------------|
| Plate Voltage                                     | 150         | 170          | volts      |
| Grid-No.2 (Screen-Grid) Voltage                   | —           | 170          | volts      |
| Grid-No.1 (Control-Grid) Voltage                  | —           | —2           | volts      |
| Cathode-Bias Resistor                             | 56          | —            | ohms       |
| Plate Current                                     | 18          | 10           | mA         |
| Grid-No.2 Current                                 | —           | 2.8          | mA         |
| Transconductance                                  | 8500        | 6200         | $\mu$ mhos |
| Plate Resistance (Approx.)                        | 5           | 400          | kohms      |
| Amplification Factor                              | 40          | 47           |            |
| Grid-No.1 Voltage for plate current of 10 $\mu$ A | —12         | —            | volts      |

**Horizontal-Deflection Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |     |      |       |
|---|-----|------|-------|
| Plate Voltage                             | 330 | 330  | volts |
| Grid-No.2 Supply Voltage                  | —   | 300  | volts |
| Plate Dissipation                         | 2.5 | 2    | watts |
| Cathode Current                           | 14  | 14   | mA    |
| Grid-No.2 Input:                          |     |      |       |
| For plate dissipation more than 1.2 watts | —   | 0.5  | watt  |
| For plate dissipation less than 1.2 watts | —   | 0.75 | watt  |

**MAXIMUM CIRCUIT VALUES**

|                               |     |     |        |
|-------------------------------|-----|-----|--------|
| Grid-No.1 Circuit Resistance: |     |     |        |
| For fixed-bias operation      | 0.5 | 0.5 | megohm |
| For cathode-bias operation    | 0.5 | 1   | megohm |


**6MHH3**

For replacement use type 6J6A.

**6MJ8**

**MEDIUM-MU  
TRIPLE TRIODE**

Duodecar type used in matrixing-amplifier circuits of color and black-and-white television receivers. Outlines section, 8D; requires duodecar 12-contact socket.



12HG

|                                     |      |               |        |
|-------------------------------------|------|---------------|--------|
| Heater Voltage                      |      | 6.3           | volts  |
| Heater Current                      |      | 0.9           | ampere |
| Heater-Cathode Voltage:             |      |               |        |
| Peak value                          |      | $\pm 200$ max | volts  |
| Average value                       |      | 100 max       | volts  |
| Direct Interelectrode Capacitances: | Unit | Unit          | Unit   |
| Grid to Plate                       | No.1 | No.2          | No.3   |
| Grid to Cathode and Heater          | 2.8  | 2.8           | 2.8    |
| Plate to Cathode and Heater         | 2.9  | 2.9           | 3      |
|                                     | 0.36 | 0.6           | 0.7    |

pF  
pF  
pF

**Class A<sub>1</sub> Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Maximum Values)**


|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 330 | volts |
| Grid Voltage, Positive-bias value ..... | 0   | volts |
| Plate Dissipation .....                 | 3   | watts |

**CHARACTERISTICS**

|   |       |       |
|---|-------|-------|
| Plate Voltage .....                               | 250   | volts |
| Grid Voltage .....                                | -10.5 | volts |
| Plate Current .....                               | 10    | mA    |
| Amplification Factor .....                        | 17    |       |
| Plate Resistance (Approx.) .....                  | 5600  | ohms  |
| Transconductance .....                            | 3000  | μmhos |
| Plate Current for grid voltage of -14 volts ..... | 4     | mA    |
| Grid Voltage for plate current of 50 μA .....     | -23   | volts |


**MAXIMUM CIRCUIT VALUE**

|   |   |        |
|---|---|--------|
| Grid-Circuit Resistance, for fixed-bias operation ..... | 1 | megohm |
|---|---|--------|

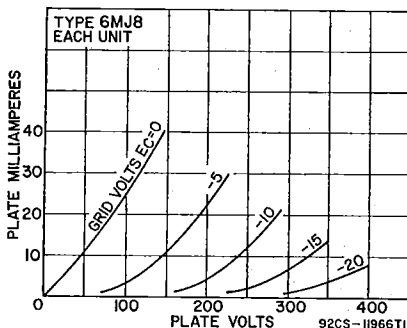

Refer to chart at end of section.

**6MK8**



**9FG**

**SHARP-CUTOFF TWIN PENTODE**

**6MK8A**

Miniature type used in sync-separator, clipper, agc, and low-level color-demodulator circuits in television receivers. Outlines section, 6E; requires miniature 9-contact socket.

|  |           |        |
|--|-----------|--------|
| Heater Voltage .....                                 | 6.3       | volts  |
| Heater Current .....                                 | 0.3       | ampere |
| Heater-Cathode Voltage:                              |           |        |
| Peak value .....                                     |           |        |
| Average value .....                                  | ±200 max  | volts  |
| Direct Interelectrode Capacitances:                  | 100 max   | volts  |
| Grid No.3 to Plate (Each Section) .....              | 2         | pF     |
| Grid No.1 to All Electrodes .....                    | 6         | pF     |
| Grid No.3 (Each Section) to All Electrodes .....     | 3.6       | pF     |
| Plate (Each Section) to All Electrodes .....         | 3         | pF     |
| Grid No.3 (Section 1) to Grid No.3 (Section 2) ..... | 0.015 max | pF     |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage (Each Unit) .....                 | 300 | volts |
| Grid-No.3 (Suppressor-Grid) Voltage (Each Unit) |     |       |
| Peak positive value .....                       | 50  | volts |
| DC negative value .....                         | 50  | volts |
| DC positive value .....                         | 3   | volts |

|   |      |       |
|---|------|-------|
| Grid-No.2 (Screen-Grid) Voltage .....                       | 150  | volts |
| Grid-No.1 (Control-Grid) Voltage, Negative-bias value ..... | 50   | volts |
| Cathode Current .....                                       | 12   | mA    |
| Plate Dissipation (Each Section) .....                      | 1.1  | watts |
| Grid-No.2 Input .....                                       | 0.75 | watt  |

**MAXIMUM PLATE CURRENT RATIO (Balance)—1.2 to 1 (6MK8A)**



|                            |      |        |
|----------------------------|------|--------|
| Plate Voltage .....        | 100  | volts  |
| Grid-No.2 Voltage .....    | 67.5 | volts  |
| Grid-No.1 Voltage .....    | 67.5 | volts  |
| Grid-No.3 Voltage .....    | 0    | volts  |
| Grid-No.1 Resistance ..... | 0.68 | megohm |

**CHARACTERISTICS**
**With One Unit Operating\***

|  |      |      |            |
|--|------|------|------------|
| Plate Voltage .....  | 100  | 100  | volts      |
| Grid-No.3 Voltage .....  | 0    | 0    | volts      |
| Grid-No.2 Voltage .....  | 67.5 | 67.5 | volts      |
| Grid-No.1 Voltage .....  | 0    | *    | volts      |
| Transconductance, Grid No.3 to Plate .....                         | —    | 450  | $\mu$ mhos |
| Transconductance, Grid No.1 to Plate .....                         | 1100 | —    | $\mu$ mhos |
| Plate Current .....  | —    | 2    | mA         |
| Grid-No.3 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | —    | -3.5 | volts      |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | —    | -2.3 | volts      |

**With Both Units Operating**

|                                     |      |      |       |
|-------------------------------------|------|------|-------|
| Plate Voltage (Each Unit) .....     | 100  | 100  | volts |
| Grid-No.3 Voltage (Each Unit) ..... | -10  | 0    | volts |
| Grid-No.2 Voltage .....             | 67.5 | 67.5 | volts |
| Grid-No.1 Voltage .....             | *    | *    | volts |
| Plate Current (Each Section) .....  | —    | 2    | mA    |
| Cathode Current .....               | 7.1  | 8.5  | mA    |
| Grid-No.2 Current .....             | 7    | 4.4  | mA    |

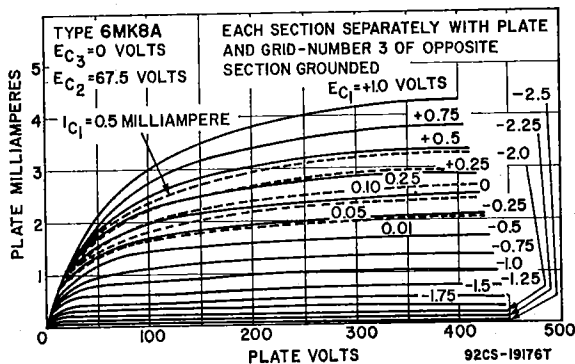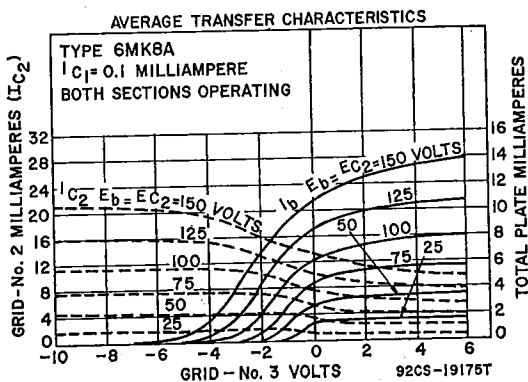


**MAXIMUM CIRCUIT VALUES**

|  |     |        |
|--|-----|--------|
| Grid-No.3-Circuit Resistance (Each Unit) ..... | 0.5 | megohm |
| Grid-No.1-Circuit Resistance .....             | 0.5 | megohm |

\* With plate and grid No.3 of other unit grounded.

\* Grid current adjusted for 100  $\mu$ A dc.



**12HU**

**HIGH-MU  
TRIPLE TRIODE**

**6MN8**

Duodecar type used for matrix-amplifier applications in color television receivers. Outlines section, 8D; requires duodecar 12-contact socket.

|                                     |               |           |           |    |
|-------------------------------------|---------------|-----------|-----------|----|
| Heater Voltage .....                | 6.3           | volts     |           |    |
| Heater Current .....                | 0.9           | ampere    |           |    |
| Heater-Cathode Voltage:             |               |           |           |    |
| Peak value .....                    | $\pm 200$ max | volts     |           |    |
| Average value .....                 | 100 max       | volts     |           |    |
| Direct Interelectrode Capacitances: |               |           |           |    |
|                                     | Unit No.1     | Unit No.2 | Unit No.3 |    |
| Grid to Plate .....                 | 2.6           | 2.6       | 2.6       | pF |
| Grid to Cathode and Heater .....    | 4.6           | 4.6       | 4.6       | pF |
| Plate to Cathode and Heater .....   | 0.33          | 0.57      | 0.65      | pF |

**Class A<sub>1</sub> Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Maximum Values)**


|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 300 | volts |
| Grid Voltage, Positive-bias value ..... | 0   | volt  |
| Plate Dissipation .....                 | 3   | watts |

**CHARACTERISTICS**

|  |      |       |            |
|--|------|-------|------------|
| Plate Voltage .....  | 125  | 200   | volts      |
| Grid Voltage .....   | -1   | -4    | volts      |
| Amplification Factor .....                                   | 47   | 40    |            |
| Plate Resistance (Approx.) .....                             | 6250 | 10000 | ohms       |
| Transconductance .....                                       | 7600 | 4000  | $\mu$ mhos |
| Plate Current .....  | 11   | 4.8   | mA         |
| Grid Voltage (Approx.) for plate current of 50 $\mu$ A ..... | -5   | -11   | volts      |

**MAXIMUM CIRCUIT VALUE**

|   |   |        |
|---|---|--------|
| Grid-Circuit Resistance, for fixed-bias operation ..... | 1 | megohm |
|---|---|--------|



**9AE**

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

**6MQ8**

5MQ8

Miniature type used in color and black-and-white television receiver applications. The pentode unit is used in band-pass-amplifier applications. The triode unit is used in video-amplifier, sync-separator, color-killer-control, matrix-amplifier, and blanker applications. Outlines section, 6B; requires miniature 9-contact socket. Type 5MQ8 is identical with type 6MQ8 except for heater ratings.

|  |               |               |         |
|--|---------------|---------------|---------|
| Heater Voltage (ac/dc) .....   | 5.6           | 6.3           | volts   |
| Heater Current .....   | 0.6           | 0.535         | ampere  |
| Heater Warm-up Time .....  | 11            | —             | seconds |
| Heater Cathode Voltage:  |               |               |         |
| Peak value .....   | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value .....  | 100 max       | 100 max       | volts   |
| Direct Interelectrode Capacitances:  |               |               |         |
| Triode Unit:   |               |               |         |
| Grid to Plate .....  |               | 1.7           | pF      |
| Grid to Triode Cathode, Pentode Cathode, Heater,<br>Pentode Grid No.3, and Internal Shield ..... |               | 3             | pF      |

|   |       |    |
|---|-------|----|
| Plate to Triode Cathode, Pentode Cathode, Heater,<br>Pentode Grid No.3, and Internal Shield ..... | 1.4   | pF |
| Pentode Unit:   |       |    |
| Grid No.1 to Plate .....  | 0.045 | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid<br>No.3, and Internal Shield .....                  | 7.5   | pF |
| Plate to Cathode, Heater, Grid No.2, Grid<br>No.3, and Internal Shield .....                      | 2.2   | pF |

Class A<sub>1</sub> Amplifier

|   | Triode Unit | Pentode Unit       |         |
|---|-------------|--------------------|---------|
| DC Plate Voltage .....  | 330         | 330                | volts   |
| DC Grid-No.2 (Screen-Grid) Supply Voltage .....                   | —           | 330                | volts   |
| DC Grid-No.2 Voltage .....  | —           | See curve page 300 |         |
| DC Grid-No.1 (Control-Grid) Voltage,<br>Positive-bias value ..... | 0           | 0                  | volt    |
| Plate Dissipation .....   | 2.7         | 2.5                | watts   |
| Grid-No.2 Input:  |             |                    |         |
| For grid-No.2 voltages up to 165 volts .....                      | —           | 0.55               | watt    |
| For grid-No.2 voltages between 165 and 330 volts .....            | —           | See curve page 300 |         |
| Interelectrode Leakage .....                                      | 109         | 100                | megohms |

## CHARACTERISTICS


|   | Triode Unit | Pentode Unit |       |
|---|-------------|--------------|-------|
| DC Plate Voltage .....                              | 150         | 125          | volts |
| DC Grid-No.2 Voltage .....                          | —           | 125          | volts |
| Cathode Resistance .....                            | 56          | 62           | ohms  |
| Amplification Factor .....                          | 40          | —            |       |
| Plate Resistance (Approx.) .....                    | 5           | 150          | kohms |
| Transconductance .....                              | 8500        | 10000        | μmhos |
| DC Plate Current .....                              | 18          | 12           | mA    |
| DC Grid-No.2 Current .....                          | —           | 4.5          | mA    |
| Grid-No.1 Voltage for plate current of 100 μA ..... | -12         | -7           | volts |

## MAXIMUM CIRCUIT VALUES

|                                  |     |      |         |
|----------------------------------|-----|------|---------|
| Grid-No.1-Circuit Resistance:    |     |      |         |
| For fixed-bias operation .....   | 0.5 | 0.25 | megohms |
| For cathode-bias operation ..... | 0.5 | 0.5  | megohms |

**6MU8****MEDIUM-MU TRIODE—  
SEMIREMOTE-CUTOFF  
PENTODE**

Miniature type used in color and black-and-white television receiver applications. The pentode unit is used in burst-amplifier circuits, and the triode unit as a general amplifier tube. Outlines section, 6E; requires miniature 9-contact socket.

**9AE**

|                           |          |         |
|---------------------------|----------|---------|
| Heater Voltage .....      | 6.3      | volts   |
| Heater Current .....      | 0.6      | ampere  |
| Heater Warm-up Time ..... | 11       | seconds |
| Heater-Cathode Voltage:   |          |         |
| Peak value .....          | ±200 max | volts   |
| Average value .....       | 100 max  | volts   |

## Direct Interelectrode Capacitances:

|  | With Shield | Without Shield |    |
|--|-------------|----------------|----|
| Triode Unit:   |             |                |    |
| Grid to Plate .....  | 2.2         | 2.2            | pF |
| Grid to Cathode, Heater, Pentode Cathode,<br>Pentode Grid No.3, and Internal Shield .....  | 3.2         | 3              | pF |
| Plate to Cathode, Heater, Pentode Cathode,<br>Pentode Grid No.3, and Internal Shield ..... | 3.4         | 2.2            | pF |
| Pentode Unit:  |             |                |    |
| Grid No.1 to Plate .....   | 0.05        | 0.05           | pF |
| Grid No.1 to Cathode, Heater, Grid No.2,<br>Grid No.3, and Internal Shield .....           | 9           | 9              | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield .....               | 4.4         | 3.6            | pF |
| Heater to Triode Cathode .....   | 4.8         | 4.4            | pF |
| Heater to Pentode Cathode .....  | 7.5         | 5.5            | pF |
| Pentode Grid No.1 to Triode Plate .....  | 0.2         | 0.17           | pF |
| Pentode Plate to Triode Plate .....  | 0.008       | 0.09           | pF |



Class A<sub>1</sub> Amplifier

**MAXIMUM RATINGS (Design-Maximum Values)**


|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage   | 330         | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —           | 330                | volts |
| Grid-No.2 Voltage                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0                  | volts |
| Grid-No.2 Input                                       | 2.5         | 3.75               | watts |
| Plate Dissipation                                     | —           | 1.1                | watts |

**CHARACTERISTICS**

|  | Triode Unit | Pentode Unit |       |
|--|-------------|--------------|-------|
| Plate Voltage  | 125         | 150          | volts |
| Grid-No.2 Voltage                                      | —           | 150          | volts |
| Grid-No.1 Voltage                                      | —1          | —            | volts |
| Cathode Bias Resistor                                  | —           | 150          | ohms  |
| Plate Current  | 11.5        | 19           | mA    |
| Grid-No.2 Current                                      | —           | 4.2          | mA    |
| Transconductance                                       | 6000        | 9000         | μmhos |
| Amplification Factor                                   | 35          | —            |       |
| Plate Resistance (Approx.)                             | 5800        | 165000       | ohms  |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | —5.8        | —            | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA | —           | —9.5         | volts |

**MAXIMUM CIRCUIT VALUES**

| Grid-No.1-Circuit Resistance: |     |      |        |
|-------------------------------|-----|------|--------|
| For fixed-bias operation      | 0.5 | 0.25 | megohm |
| For cathode-bias operation    | 1   | 1    | megohm |



9DX

**HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE 6MV8**

Miniature type used for general-purpose applications. The pentode unit is used as an if-amplifier, and the triode unit as a sync-separator or voltage amplifier. Outlines section, 6B; requires miniature 9-contact socket. Heater: volts, 6.3; ampere, 0.6; maximum heater-cathode volts, ±200 peak, 100 average.

Class A<sub>1</sub> Amplifier

**MAXIMUM RATINGS (Design-Maximum Values)**

|  | Triode Unit | Pentode Unit       |       |
|--|-------------|--------------------|-------|
| Plate Voltage  | 330         | 330                | volts |
| Grid-No. 2 (Screen-Grid) Supply Voltage                | —           | 330                | volts |
| Grid-No. 2 Voltage                                     | —           | See curve page 300 |       |
| Grid-No. 1 (Control-Grid) Voltage, Positive bias value | 0           | 0                  | volts |
| Plate Dissipation                                      | 1           | 2.5                | watts |
| Grid-No. 2 Input                                       | —           | 0.55               | watts |

**CHARACTERISTICS**

|   | Triode Unit | Pentode Unit |       |
|---|-------------|--------------|-------|
| Plate Voltage   | 250         | 125          | volts |
| Grid-No. 2 Voltage                                      | —           | 125          | volts |
| Grid-No. 1 Voltage                                      | —2          | —1           | volts |
| Plate Current   | 2.5         | 13           | mA    |
| Grid-No. 2 Current                                      | —           | 4            | mA    |
| Transconductance  | 4000        | 9000         | μmhos |
| Amplification Factor                                    | 100         | —            |       |
| Plate Resistance (Approx.)                              | 25000       | 150000       | ohms  |
| Grid-No. 1 Voltage (Approx.) for plate current of 20 μA | —4.5        | —6           | volts |

**MAXIMUM CIRCUIT VALUES**

| Grid-No. 1-Circuit Resistance: |     |      |         |
|--------------------------------|-----|------|---------|
| For fixed-bias operation       | 0.5 | 0.25 | megohms |
| For cathode-bias operation     | 1   | 1    | megohms |

Refer to chart at end of section.


6N6G

|       |  |
|-------|--|
| 6N7   | Refer to chart at end of section.  |
| 6N7GT |  |
| 6P5GT | Refer to chart at end of section.  |
| 6P7G  | Refer to chart at end of section.  |
| 6Q7   |  |
| 6Q7G  | Refer to chart at end of section.  |
| 6Q7GT |  |
| 6Q11  | Refer to chart at end of section.<br>For replacement use type 6K11/6Q11. |
| 6R7   |  |
| 6R7G  | Refer to chart at end of section.  |
| 6R7GT |  |
| 6RHH2 | For replacement use type 6BC8/6BZ8.                                      |
| 6RHH8 | For replacement use type 6KN8/6RHH8.                                     |
| 6RK19 | For replacement use type 6BR3/6RK19.                                     |
| 6RP22 | Refer to chart at end of section.  |
| 6S4   | Refer to chart at end of section.  |

**6S4A****MEDIUM-MU TRIODE**

Miniature type used as vertical-deflection amplifier in color and black-and-white television receivers. Outlines section, 6E; requires miniature 9-contact socket.

|   |          |         |
|---|----------|---------|
| Heater Voltage (ac/dc)                        | 6.3      | volts   |
| Heater Current                                | 0.6      | ampere  |
| Heater Warm-up Time (Average)                 | 11       | seconds |
| Heater-Cathode Voltage:                       |          |         |
| Peak value                                    | ±200 max | volts   |
| Average value                                 | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.): |          |         |
| Grid to Plate                                 | 2.4      | pF      |
| Grid to Cathode and Heater                    | 4.2      | pF      |
| Plate to Cathode and Heater                   | 0.6      | pF      |

**9AC****Class A<sub>1</sub> Amplifier**

|   |      |       |
|---|------|-------|
| <b>CHARACTERISTICS</b>                            |      |       |
| Plate Voltage                                     | 250  | volts |
| Grid Voltage                                      | -8   | volts |
| Amplification Factor                              | 16.5 |       |
| Plate Resistance (Approx.)                        | 3700 | ohms  |
| Transconductance                                  | 4500 | μmhos |
| Plate Current                                     | 24   | mA    |
| Plate Current for grid voltage of -15 volts       | 4    | mA    |
| Grid Voltage (Approx.) for plate current of 50 μA | -22  | volts |

**Vertical-Deflection Amplifier**

For operation in a 525-line, 30-frame system


|  |      |       |
|--|------|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b> |      |       |
| DC Plate Voltage                               | 550  | volts |
| Peak Positive-Pulse Plate Voltage#             | 2200 | volts |
| Peak Negative-Pulse Grid Voltage               | 250  | volts |
| Peak Cathode Current                           | 105  | mA    |
| Average Cathode Current                        | 30   | mA    |
| Plate Dissipation                              | 8.5  | watts |

**MAXIMUM CIRCUIT VALUE**

Grid-Circuit Resistance, for cathode-bias operation ..... 2.2 megohms  
 # Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

- Refer to chart at end of section. **6S7**  
**6S7G**
- Refer to chart at end of section. **6S8GT**
- Refer to chart at end of section. **6SA7**  
**6SA7GT**
- Refer to chart at end of section. **6SB7Y**
- Refer to chart at end of section. **6SC7**
- Refer to chart at end of section. **6SF5**  
**6SF5GT**
- Refer to chart at end of section. **6SF7**
- Refer to chart at end of section. **6SG7**
- Refer to chart at end of section. **6SH7**
- Refer to chart at end of section. **6SJ7**  
**6SJ7GT**
- Refer to chart at end of section. **6SK7**  
**6SK7GT**

**6SL7GT**  
12SL7GT



**HIGH-MU TWIN TRIODE**

**8BD**

phase inverter or resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section. Type 12SL7GT is identical with type 6SL7GT except for heater ratings.

Glass octal type used as phase inverter in radio equipment. Each unit may also be used in resistance-coupled amplifier circuits. Outlines section, 13D; requires octal socket. Except for the common heater, each triode unit is independent of the other. For typical operation as

|  |                   |                     |        |
|--|-------------------|---------------------|--------|
| Heater Voltage (ac/dc) .....                   | <b>6SL7GT</b> 6.3 | <b>12SL7GT</b> 12.6 | volts  |
| Heater Current .....                           | 0.3               | 0.15                | ampere |
| Peak Heater-Cathode Voltage .....              | ±90 max           | ±90 max             | volts  |
| Direct Interelectrode Capacitances (Approx.):° | <b>Unit No.1</b>  | <b>Unit No.2</b>    |        |
| Grid to Plate .....                            | 2.8               | 2.8                 | pF     |
| Grid to Cathode and Heater .....               | 3                 | 3.4                 | pF     |
| Plate to Cathode and Heater .....              | 3.8               | 3.2                 | pF     |

° With external shield connected to cathode.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 300 | volts |
| Grid Voltage, Positive-bias value ..... | 0   | volts |
| Plate Dissipation .....                 | 1   | watt  |

**CHARACTERISTICS**

|                                  |       |       |
|----------------------------------|-------|-------|
| Plate Voltage .....              | 250   | volts |
| Grid Voltage .....               | -2    | volts |
| Amplification Factor .....       | 70    |       |
| Plate Resistance (Approx.) ..... | 44000 | ohms  |
| Transconductance .....           | 1600  | μmhos |
| Plate Current .....              | 2.3   | mA    |


**6SN7GT**  
**6SN7GTA**

Refer to chart at end of section.

**6SN7GTB MEDIUM-MU TWIN TRIODE**

**12SN7GTA**

Glass octal type used as combined vertical oscillator and vertical-deflection amplifier, and as horizontal-deflection oscillator, in color and black-and-white television receivers. Each unit may also be used in multi-radiator or resistance-coupled amplifier circuits in radio equipment. Outlines section, 13D; requires octal socket. Except for the common heater, each triode unit is independent of the other. For typical operation as resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section. Type 12SN7GTA is identical with type 6SN7GTB except for heater ratings.



**8BD**

|   | 6SN7GTB   | 12SN7GTA  |         |
|---|-----------|-----------|---------|
| Heater Voltage (ac/dc)                        | 6.3       | 12.6      | volts   |
| Heater Current                                | 0.6       | 0.3       | ampere  |
| Heater Warm-up Time (Average)                 | 11        | —         | seconds |
| Heater-Cathode Voltage:                       |           |           |         |
| Peak value                                    | ±200 max  | ±200 max  | volts   |
| Average value                                 | 100 max   | 100 max   | volts   |
| Direct Interelectrode Capacitances (Approx.): |           |           |         |
|   | Unit No.1 | Unit No.2 |         |
| Grid to Plate                                 | 4.0       | 3.8       | pF      |
| Grid to Cathode and Heater                    | 2.2       | 2.6       | pF      |
| Plate to Cathode and Heater                   | 0.7       | 0.7       | pF      |

**Class A<sub>1</sub> Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Center Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage                             | 450 | volts |
| Cathode Current                           | 20  | mA    |
| Plate Dissipation:                        |     |       |
| For either plate                          | 5   | watts |
| For both plates with both units operating | 7.5 | watts |

**CHARACTERISTICS**

|   |      |      |       |
|---|------|------|-------|
| Plate Voltage                                     | 90   | 250  | volts |
| Grid Voltage                                      | 0    | -8   | volts |
| Amplification Factor                              | 20   | 20   |       |
| Plate Resistance (Approx.)                        | 6700 | 7700 | ohms  |
| Transconductance                                  | 3000 | 2600 | μmhos |
| Plate Current                                     | 10   | 9    | mA    |
| Plate Current for grid voltage of -12.5 volts     | —    | 1.3  | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA | -7   | -18  | volts |

**MAXIMUM CIRCUIT VALUE**

|   |   |        |
|---|---|--------|
| Grid-Circuit Resistance, for fixed-bias operation | 1 | megohm |
|---|---|--------|

**Oscillator (Each Unit)**

For operation in a 525-line, 30-frame system

|   | Vertical-Deflection Oscillator | Horizontal-Deflection Oscillator |         |
|---|--------------------------------|----------------------------------|---------|
| <b>MAXIMUM RATINGS (Design-Center Values)</b> |                                |                                  |         |
| DC Plate Voltage                              | 450                            | 450                              | volts   |
| Peak Negative-Pulse Grid Voltage              | 400                            | 600                              | volts   |
| Peak Cathode Current                          | 70                             | 300                              | mA      |
| Average Cathode Current                       | 20                             | 20                               | mA      |
| Plate Dissipation:                            |                                |                                  |         |
| For either plate                              | 5                              | 5                                | watts   |
| For both plates with both units operating     | 7.5                            | 7.5                              | watts   |
| <b>MAXIMUM CIRCUIT VALUES</b>                 |                                |                                  |         |
| Grid-Circuit Resistance                       | 2.2                            | 2.2                              | megohms |

**Vertical-Deflection Amplifier (Each Unit)**

For operation in a 525-line, 30-frame system

|   |      |       |
|---|------|-------|
| <b>MAXIMUM RATINGS (Design-Center Values)</b>         |      |       |
| DC Plate Voltage                                      | 450  | volts |
| Peak Positive-Pulse Plate Voltage# (Absolute maximum) | 1500 | volts |
| Peak Negative-Pulse Grid Voltage                      | 250  | volts |
| Peak Cathode Current                                  | 70   | mA    |


|   |     |       |
|---|-----|-------|
| Average Cathode Current .....                   | 20  | mA    |
| Plate Dissipation:                              |     |       |
| For either plate .....                          | 5   | watts |
| For both plates with both units operating ..... | 7.5 | watts |

**MAXIMUM CIRCUIT VALUE**

Grid-Circuit Resistance, for cathode-bias operation ..... 2.2 megohms

# Pulse duration must not exceed 15% of a vertical cycle (2.5 milliseconds).

■ Under no circumstances should this absolute value be exceeded.

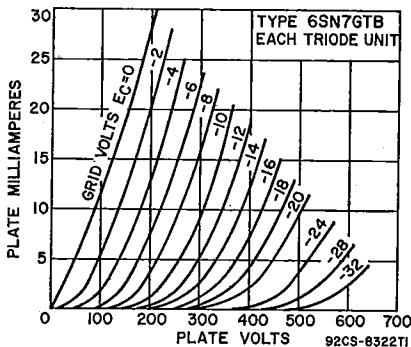

Refer to chart at end of section.

**6SQ7**  
**6SQ7GT**

Refer to chart at end of section.

**6SR7**

Refer to chart at end of section.

**6SS7**

Refer to chart at end of section.

**6ST7**

Refer to chart at end of section.

**6SZ7**

Refer to chart at end of section.  
For replacement use type 6AF4A.


**6T4**

Refer to chart at end of section.

**6T7G**

Refer to chart at end of section.

**6T8**



**9E**

**TRIPLE DIODE—  
HIGH-MU TRIODE**

**6T8A**

5T8, 19T8

Miniature type used as combined audio amplifier, AM detector, and FM detector in AM/FM radio receivers. Diode unit No.1 is used for AM detection, and diode units No.2 and No.3 are used for FM detection. Outlines section, 6B; requires miniature 9-contact socket. For typical operation as resistance-coupled amplifier,

refer to **Resistance-Coupled Amplifier** section. Types 5T8 and 19T8 are identical with type 6T8A except for heater ratings.

|                                     |            |             |              |         |
|-------------------------------------|------------|-------------|--------------|---------|
| Heater Voltage (ac/dc) .....        | 5T8<br>4.7 | 6T8A<br>6.3 | 19T8<br>18.9 | volts   |
| Heater Current .....                | 0.6        | 0.45        | 0.15         | ampere  |
| Heater Warm-up Time (Average) ..... | 11         | 11          | 11           | seconds |
| Heater-Cathode Voltage:             |            |             |              |         |
| Peak value .....                    | ±200 max   | ±100 max    | ±90 max      | volts   |
| Average value .....                 | 100 max    | —           | —            | volts   |

## Direct Interelectrode Capacitances:

|   | Unshielded | Shielded  |    |
|---|------------|-----------|----|
| <b>Triode Unit:</b>   |            |           |    |
| Grid to Plate .....   | 1.7        | 1.7       | pF |
| Grid to Cathode, Internal Shield (pin 7), and Heater .....                            | 1.6        | 1.7       | pF |
| Plate to Cathode, Internal Shield (pin 7), and Heater .....                           | 1.2        | 2.4       | pF |
| <b>Diode Units:</b>   |            |           |    |
| Diode-No.1 Plate to Cathode, Internal Shield (pin 7), and Heater .....                | 3.8        | 3.8       | pF |
| Diode-No.2 Plate to Cathode, Internal Shield (pin 3), and Heater .....                | 3.8        | 3.8*      | pF |
| Diode-No.3 Plate to Cathode, Internal Shield (pin 7), and Heater .....                | 3.4        | 3.6       | pF |
| Diode-No.2 Cathode, Internal Shield (pin 3) to All Other Electrodes, and Heater ..... | 7.5        | 8.5*      | pF |
| Triode Grid to any Diode Plate .....  | 0.034 max  | 0.034 max | pF |

\* With external shield connected to pin 7 except as noted.

• With external shield connected to pin 3.

• With external shield connected to pins 4 and 5.

Triode Unit as Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 330 | volts |
| Grid Voltage, Positive-bias value ..... | 0   | volts |
| Plate Dissipation .....                 | 1.1 | watts |


## CHARACTERISTICS

|                                  |       |       |       |
|----------------------------------|-------|-------|-------|
| Plate Voltage .....              | 100   | 250   | volts |
| Grid Voltage .....               | -1    | -3    | volts |
| Amplification Factor .....       | 70    | 70    |       |
| Plate Resistance (Approx.) ..... | 54000 | 58000 | ohms  |
| Transconductance .....           | 1300  | 1200  | μmhos |
| Plate Current .....              | 0.8   | 1     | mA    |

## Diode Units

## MAXIMUM RATING (Design-Maximum Values)

|                                 |     |    |
|---------------------------------|-----|----|
| Plate Current (Each Unit) ..... | 5.5 | mA |
|---------------------------------|-----|----|

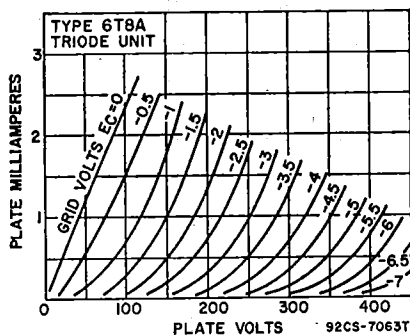

6T9


Refer to chart at end of section.

## 6T10

10T10, 12T10

BEAM POWER TUBE—  
SHARP-CUTOFF PENTODE

Duodecar type used as combined FM detector and audio-frequency output amplifier in color and black-and-white television receivers. The beam power unit is used in af output stages, and the sharp-cutoff, dual-control pentode unit is used as an FM detector. Outlines section, 8C; requires duodecar 12-contact socket. For maximum ratings and characteristics, refer to type 6AL11. Types 10T10 and 12T10 are identical with type 6T10 except for heater ratings.



|  |          |          |          |         |
|--|----------|----------|----------|---------|
|  | 6T10     | 10T10    | 12T10    |         |
| Heater Voltage (ac/dc) .....   | 6.3      | 9.8      | 12.6     | volts   |
| Heater Current .....   | 0.95     | 0.6      | 0.45     | amperes |
| Heater Warm-up Time (Average) .....  | —        | 11       | 11       | seconds |
| Heater-Cathode Voltage:  |          |          |          |         |
| Peak value .....   | ±200 max | ±200 max | ±200 max | volts   |
| Average value .....  | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances:  |          |          |          |         |
| Unit No.1:   |          |          |          |         |
| Grid No.1 to Plate .....   |          |          | 0.22     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....        |          |          | 11       | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....            |          |          | 10       | pF      |
| Unit No.2:   |          |          |          |         |
| Grid No.1 to Plate .....   |          |          | 0.032    | pF      |
| Grid No.3 to Plate .....   |          |          | 3        | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3 and Internal Shield .....         |          |          | 6.5      | pF      |
| Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2, Plate, and Internal Shield ..... |          |          | 7.5      | pF      |
| Grid No.1 to Grid No.3 .....   |          |          | 0.12     | pF      |
| Plate of Unit No.1 to Plate of Unit No.2 .....                                       |          |          | 0.13     | pF      |

Refer to chart at end of section.

6U5

Refer to chart at end of section.

6U7G

Refer to chart at end of section.

6U8


6U8A

6U8A/

6KD8

5U8

MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE



9AE

Miniature types used as combined oscillator and mixer tube in color and black-and-white television receivers utilizing an intermediate frequency in the order of 40 MHz. Outlines section, 6B; require miniature 9-contact socket. Type 5U8 is identical with type 6U8A except for heater ratings.

|   |            |                       |         |
|---|------------|-----------------------|---------|
|   | 5U8        | 6U8A                  |         |
|   |            | 6U8A/6KD8             |         |
| Heater Voltage (ac/dc) .....  | 4.7        | 6.3                   | volts   |
| Heater Current .....  | 0.6        | 0.45                  | ampere  |
| Heater Warm-up Time (Average) .....   | 11         | 11                    | seconds |
| Heater-Cathode Voltage:   |            |                       |         |
| Peak value .....  | ±200 max   | ±200 max              | volts   |
| Average value .....   | 100 max    | 100 max               | volts   |
| Direct Interelectrode Capacitances:   | Unshielded | Shielded <sup>Δ</sup> |         |
| Triode Unit:  |            |                       |         |
| Grid to Plate .....   | 1.8        | 1.8                   | pF      |
| Grid to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield .....  | 2.8        | 2.8                   | pF      |
| Plate to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield ..... | 1.5        | 2                     | pF      |
| Pentode Unit:   |            |                       |         |
| Grid No.1 to Plate .....  | 0.010 max  | 0.006 max             | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....           | 5          | 5                     | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....               | 2.6        | 3.5                   | pF      |
| Triode Cathode to Heater .....  | 3          | 3*                    | pF      |
| Pentode Cathode, Pentode Grid No.3, and Internal Shield .....                           | 3          | 3*                    | pF      |
| Pentode Grid No.1 to Triode Plate .....   | 0.2 max    | 0.2 max               | pF      |
| Pentode Plate to Triode Plate .....   | 0.1 max    | 0.02 max              | pF      |

Δ With external shield connected to pin 4 except as noted.

\* With external shield connected to pin 6.

Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values)                | Triode Unit | Pentode Unit       |        |
|--|-------------|--------------------|--------|
| Plate Voltage  | 330         | 330                | volts  |
| Grid-No.2 (Screen-Grid) Supply Voltage                 | —           | 330                | volts  |
| Grid-No.2 Voltage                                      | —           | See curve page 300 |        |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value  | 0           | 0                  | volts  |
| Plate Dissipation                                      | 2.5         | 3                  | watts  |
| Grid-No.2 Input:                                       |             |                    |        |
| For grid-No.2 voltages up to 165 volts                 | —           | 0.55               | watt   |
| For grid-No.2 voltages between 165 and 330 volts       | —           | See curve page 300 |        |
| <b>CHARACTERISTICS</b>                                 |             |                    |        |
| Plate Voltage  | 125         | 125                | volts  |
| Grid-No.2 Voltage                                      | —           | 110                | volts  |
| Grid-No.1 Voltage                                      | -1          | -1                 | volts  |
| Amplification Factor                                   | 40          | —                  |        |
| Plate Resistance (Approx.)                             | —           | 0.2                | megohm |
| Transconductance                                       | 7500        | 5000               | μmhos  |
| Plate Current  | 13.5        | 9.5                | mA     |
| Grid-No.2 Current                                      | —           | 3.5                | mA     |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA | -9          | -8                 | volts  |


6U9/ECF201

Refer to chart at end of section.

## 6U10

## THREE-UNIT TRIODE

Duodecar type used in amplifier applications. Units No.1 and No.3 are medium- $\mu$  triode units, and unit No.2 is a high- $\mu$  triode unit. Outlines section, 8A; requires duodecar 12-contact socket. Heater: volts (ac/dc), 6.3; amperes, 0.6; warm-up time (average), 11 seconds; maximum heater-cathode volts,  $\pm 275$  (peak) for units 1 and 3;  $\pm 200$  (peak) for unit 2; 100 (average) for each unit.

Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values) | Units Nos. 1 and 3 | Unit No.2 |         |
|---|--------------------|-----------|---------|
| Plate Voltage                           | 330                | 330       | volts   |
| DC Grid Voltage:                        |                    |           |         |
| Positive-bias value                     | 0                  | 0         | volts   |
| Negative-bias value                     | 50                 | 50        | volts   |
| Average Cathode Current                 | 20                 | —         | mA      |
| Plate Dissipation                       | 2                  | 1         | watts   |
| <b>CHARACTERISTICS</b>                  |                    |           |         |
| Plate Voltage                           | 200                | 200       | volts   |
| Grid Voltage                            | -6                 | -1.5      | volts   |
| Amplification Factor                    | 17.5               | 90        |         |
| Plate Resistance (Approx.)              | 7700               | 61000     | ohms    |
| Transconductance                        | 2300               | 1600      | μmhos   |
| Plate Current                           | 9.6                | 1.2       | mA      |
| Grid Voltage (Approx.):                 |                    |           |         |
| For plate current of 100 μA             | -15                | —         | volts   |
| For plate current of 35 μA              | —                  | -3        | volts   |
| <b>MAXIMUM CIRCUIT VALUES</b>           |                    |           |         |
| Grid-Circuit Resistance:                |                    |           |         |
| For fixed-bias operation                | 1                  | 0.5       | megohm  |
| For cathode-bias operation              | 2.2                | 1*        | megohms |

\* This value may reach 10 megohms provided the plate-supply voltage and load resistance are such that the plate dissipation can never exceed 0.5 watt.


6V3A

Refer to chart at end of section.



**6V6**  
**6V6GTA**  
12V6GT

**BEAM POWER TUBE**



Metal type 6V6 and glass octal type 6V6GTA are used as output amplifiers in automobile, battery-operated, and other receivers in which reduced plate-current drain is desirable. Outlines section, 2B and 13D, respectively; require octal socket. These tubes are equivalent in performance to type 6AQ5A. Refer to type 6AQ5A for average plate characteristic curves. Type 12V6GT is identical with type 6V6GTA except for heater ratings.

**7AC**

|  |            |               |                |         |
|--|------------|---------------|----------------|---------|
| Heater Voltage (ac/dc)                                 | 6V6<br>6.3 | 6V6GTA<br>6.3 | 12V6GT<br>12.6 | volts   |
| Heater Current   | 0.45       | 0.45          | 0.225          | ampere  |
| Heater Warm-up Time (Average)                          | —          | 11            | —              | seconds |
| Heater-Cathode Voltage:                                |            |               |                |         |
| Peak value   | ±200 max   | ±200 max      | ±200 max       | volts   |
| Average value  | 100 max    | 100 max       | 100 max        | volts   |
| Direct Interelectrode Capacitances (Approx.):          |            | 6V6°          | 6V6GTA         |         |
| Grid No.1 to Plate                                     |            | 0.3           | 0.7            | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 |            | 10            | 9              | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     |            | 11            | 7.5            | pF      |

\* With shell connected to cathode.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                 |     |       |
|---------------------------------|-----|-------|
| Plate Voltage                   | 350 | volts |
| Grid-No.2 (Screen-Grid) Voltage | 315 | volts |
| Plate Dissipation               | 14  | watts |
| Grid-No.2 Input                 | 2.2 | watts |

**TYPICAL OPERATION**

|                                  |       |       |       |          |
|----------------------------------|-------|-------|-------|----------|
| Plate Voltage                    | 180   | 250   | 315   | volts    |
| Grid-No.2 Voltage                | 180   | 250   | 225   | volts    |
| Grid-No.1 (Control-Grid) Voltage | -8.5  | -12.5 | -13   | volts    |
| Peak AF Grid-No.1 Voltage        | 8.5   | 12.5  | 13    | volts    |
| Zero-Signal Plate Current        | 29    | 45    | 34    | mA       |
| Maximum-Signal Plate Current     | 30    | 47    | 35    | mA       |
| Zero-Signal Grid-No.2 Current    | 3     | 4.5   | 2.2   | mA       |
| Maximum-Signal Grid-No.2 Current | 4     | 7     | 6     | mA       |
| Plate Resistance (Approx.)       | 50000 | 50000 | 80000 | ohms     |
| Transconductance                 | 3700  | 4100  | 3750  | μmhos    |
| Load Resistance                  | 5500  | 5000  | 8500  | ohms     |
| Total Harmonic Distortion        | 8     | 8     | 12    | per cent |
| Maximum-Signal Power Output      | 2     | 4.5   | 5.5   | watts    |

**CHARACTERISTICS (Triode Connection)▲**

|   |       |       |
|---|-------|-------|
| Plate Voltage   | 250   | volts |
| Grid-No.1 (Control-Grid) Voltage                        | -12.5 | volts |
| Amplification Factor                                    | 9.8   |       |
| Plate Resistance (Approx.)                              | 1960  | ohms  |
| Transconductance  | 5000  | μmhos |
| Plate Current   | 49.5  | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 0.5 mA | -36   | volts |

▲ Grid No.2 connected to plate.

**Push-Pull Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Same as for Class A<sub>1</sub> Amplifier)**

**TYPICAL OPERATION (Values are for two tubes)**

|  |     |      |       |
|--|-----|------|-------|
| Plate Voltage                          | 250 | 285  | volts |
| Grid-No.2 Voltage                      | 250 | 285  | volts |
| Grid-No.1 (Control-Grid) Voltage       | -15 | -19  | volts |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | 30  | 38   | volts |
| Zero-Signal Plate Current              | 70  | 70   | mA    |
| Maximum-Signal Plate Current           | 79  | 92   | mA    |
| Zero-Signal Grid-No.2 Current          | 5   | 4    | mA    |
| Maximum-Signal Grid-No.2 Current       | 13  | 13.5 | mA    |

|  |       |      |          |
|--|-------|------|----------|
| Effective Load Resistance (Plate-to-Plate) ..... | 10000 | 8000 | ohms     |
| Total Harmonic Distortion .....                  | 5     | 3.5  | per cent |
| Maximum-Signal Power Output .....                | 10    | 14   | watts    |

**MAXIMUM CIRCUIT VALUES**

|                                  |  |     |        |
|----------------------------------|--|-----|--------|
| Grid-No.1-Circuit Resistance:    |  |     |        |
| For fixed-bias operation .....   |  | 0.1 | megohm |
| For cathode-bias operation ..... |  | 0.5 | megohm |

**Vertical-Deflection Amplifier (Triode Connection)<sup>▲</sup>**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |  |      |       |
|--|--|------|-------|
| DC Plate Voltage .....                                     |  | 350  | volts |
| Peak Positive-Pulse Plate Voltage# .....                   |  | 1200 | volts |
| Peak Negative-Pulse Grid-No.1 (Control-Grid) Voltage ..... |  | 275  | volts |
| Peak Cathode Current .....                                 |  | 115  | mA    |
| Average Cathode Current .....                              |  | 40   | mA    |
| Plate Dissipation .....                                    |  | 10   | watts |

**MAXIMUM CIRCUIT VALUE**

|  |     |         |
|--|-----|---------|
| Grid-No.1-Circuit Resistance, for cathode-bias operation ..... | 2.2 | megohms |
|--|-----|---------|

<sup>▲</sup> Grid No.2 connected to plate.


# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

**6V6GT** Refer to chart at end of section.**6V6GTY** Refer to chart at end of section.**6V7G** Refer to chart at end of section.**6W4GT** Refer to chart at end of section.**6W6GT**

12W6GT

**BEAM POWER TUBE**

Glass octal type used in the audio output stage of radio and color and black-and-white television receivers. Triode-connected, it is used as a vertical-deflection amplifier in television receivers. Outlines section, 13D; requires octal socket. This type may be supplied with pin No.1 omitted. Type 12W6GT is identical with type 6W6GT except for heater ratings.

**7AC**

|  | 6W6GT    | 12W6GT   |         |
|--|----------|--|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | 12.6   | volts   |
| Heater Current .....   | 1.2      | 0.6  | ampere  |
| Heater Warm-up Time (Average) .....                          | —        | 11   | seconds |
| Heater-Cathode Voltage:                                      |          |  |         |
| Peak value .....   | ±200 max | { +200 max<br>-300 max<br>+100 max<br>-200 max | volts   |
| Average value .....  | 100 max  |  | volts   |
| Direct Interelectrode Capacitances (Approx.):                |          |  |         |
| Grid No.1 to Plate .....                                     |          | 0.8  | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... |          | 15   | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     |          | 9  | pF      |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|                                       |  |      |       |
|---------------------------------------|--|------|-------|
| Plate Voltage .....                   |  | 330  | volts |
| Grid-No.2 (Screen-Grid) Voltage ..... |  | 165  | volts |
| Plate Dissipation .....               |  | 12   | watts |
| Grid-No.2 Input .....                 |  | 1.35 | watts |

**TYPICAL OPERATION**

|  |       |       |       |
|--|-------|-------|-------|
| Plate Supply Voltage .....             | 110   | 200   | volts |
| Grid-No.2 Supply Voltage .....         | 110   | 125   | volts |
| Grid-No.1 (Control-Grid) Voltage ..... | -7.5  | —     | volts |
| Cathode-Bias Resistor .....            | —     | 180   | ohms  |
| Peak AF Grid-No.1 Voltage .....        | 7.5   | 8.5   | volts |
| Zero-Signal Plate Current .....        | 49    | 46    | mA    |
| Maximum-Signal Plate Current .....     | 50    | 47    | mA    |
| Zero-Signal Grid-No.2 Current .....    | 4     | 2.2   | mA    |
| Maximum-Signal Grid-No.2 Current ..... | 10    | 8.5   | mA    |
| Plate Resistance (Approx.) .....       | 13000 | 28000 | ohms  |

|   |      |      |            |
|---|------|------|------------|
| Transconductance .....                    | 8000 | 8000 | $\mu$ mhos |
| Load Resistance .....                     | 2000 | 4000 | ohms       |
| Total Harmonic Distortion (Approx.) ..... | 10   | 10   | per cent   |
| Maximum-Signal Power Output .....         | 2.1  | 3.8  | watts      |

**CHARACTERISTICS (Triode Connection)\***

|   |  |      |            |
|---|--|------|------------|
| Plate Voltage .....   |  | 225  | volts      |
| Grid-No.1 Voltage .....                                       |  | -30  | volts      |
| Amplification Factor .....                                    |  | 6.2  |            |
| Plate Resistance (Approx.) .....                              |  | 1600 | ohms       |
| Transconductance .....  |  | 3800 | $\mu$ mhos |
| Plate Current .....   |  | 22   | mA         |
| Grid No.1 Voltage (Approx.) for plate current of 0.5 mA ..... |  | -42  | volts      |

**MAXIMUM CIRCUIT VALUES**

|                                  |  |     |        |
|----------------------------------|--|-----|--------|
| Grid-No.1 Circuit Resistance:    |  |     |        |
| For fixed-bias operation .....   |  | 0.1 | megohm |
| For cathode-bias operation ..... |  | 0.5 | megohm |

\* Grid No.2 connected to plate.

**Vertical-Deflection Amplifier**

For operation in a 525-line, 30-frame system



| MAXIMUM RATINGS (Design-Maximum Values)     | Triode Connection* | Pentode Connection |       |
|---|--------------------|--------------------|-------|
| DC Plate Voltage .....                      | 330                | 330                | volts |
| Peak Positive-Pulse Plate Voltage# .....    | 1200               | 1500               | volts |
| DC Grid No.2 (Screen-Grid) Voltage .....    | —                  | 165                | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 275                | 275                | volts |
| Peak Cathode Current .....                  | 195                | 195                | mA    |
| Average Cathode Current .....               | 65                 | 65                 | mA    |
| Plate Dissipation .....                     | 8.5                | 8                  | watts |
| Grid-No.2 Input .....                       | —                  | 1.2                | watts |

**MAXIMUM CIRCUIT VALUE**

|  |     |     |         |
|--|-----|-----|---------|
| Grid-No.1-Circuit Resistance, for cathode-bias operation ..... | 2.2 | 2.2 | megohms |
|--|-----|-----|---------|


\* Grid No.2 connected to plate.

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

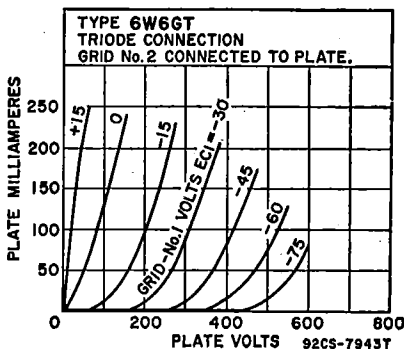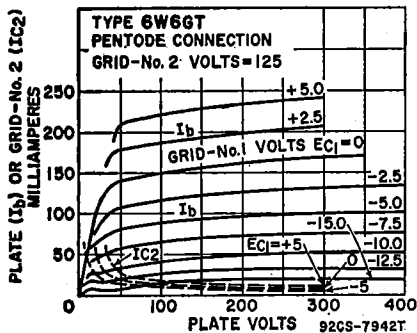

Refer to chart at end of section.

**6W7G**



**FULL-WAVE  
VACUUM RECTIFIER**

**6X4  
12X4**

Miniature type used in power supply of automobile and ac-operated radio receivers. Equivalent in performance to larger type 6X5GT. Outlines section, 5D; requires miniature 7-contact socket. This tube, like other power-handling tubes, should be adequately ventilated. For discussion of Rating Chart and Operation Characteristics, refer to Interpretation of Tube Data. Type 12X4 is identical with type 6X4 except for heater ratings.

|                              |                  |          |        |
|------------------------------|------------------|----------|--------|
| Heater Voltage (ac/dc) ..... | 6X4              | 12X4     | volts  |
| Heater Current .....         | 6.3 <sup>A</sup> | 12.6     | ampere |
| Heater-Cathode Voltage:      |                  |          |        |
| Peak value .....             | +200,            | -450 max | volts  |
| Average value .....          | 100 max          |          | volts  |

<sup>A</sup> When the heater is operated from a 3-cell (nominal-6-volt) storage-battery source, the permissible heater-voltage range is from 5 to 8 volts.



### Full-Wave Rectifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|  |                  |       |
|--|------------------|-------|
| Peak Inverse Plate Voltage .....                       | 1250             | volts |
| Steady-State Peak Plate Current (Per Plate) .....      | 245              | mA    |
| AC Plate Supply Voltage (Per Plate, rms) .....         | See Rating Chart |       |
| DC Output Voltage (At filter input) <sup>†</sup> ..... | 350              | volts |
| Average Output Current (Each plate) <sup>†</sup> ..... | 45               | mA    |
| Hot-Switching Transient Plate Current .....            | #                |       |

<sup>†</sup> This rating applies when the 6X4 is used in vibrator operation with a minimum duty cycle of 75 per cent.

# If hot-switching is regularly required in operation, the use of choke-input circuits is recommended. Such circuits limit the hot-switching current to a value no higher than that of the peak plate current. When capacitor-input circuits are used, a maximum peak current value per plate of 1.1 amperes during the initial cycles of the hot-switching transient should not be exceeded.

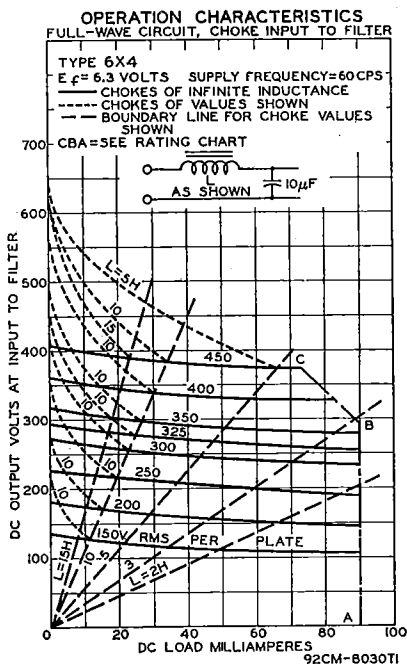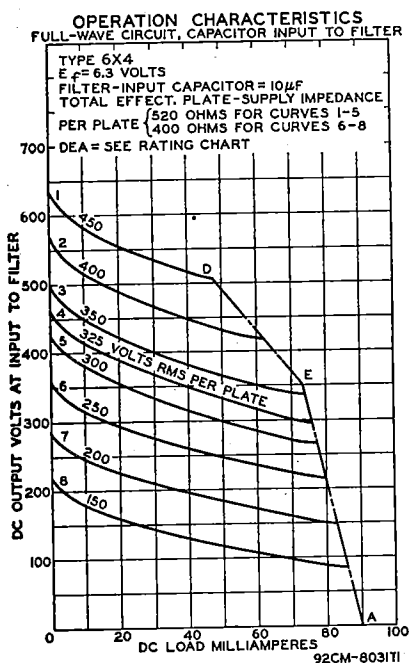


#### TYPICAL OPERATION

|  | Sine Wave Operation<br>Capacitor Choke | Vibrator<br>Operation<br>Capacitor |            |
|--|--|------------------------------------|------------|
| Filter Input                                     |  |                                    |            |
| AC Plate Supply Voltage (Each plate, rms) ..     | 325                                    | 400                                | volts      |
| Filter Input Capacitor .....                     | 10                                     | —                                  | 10 $\mu$ F |
| Effective Plate Supply Impedance (Each plate) .. | 525                                    | —                                  | ohms       |
| Filter Input Choke .....                         | —                                      | 10                                 | henries    |
| Average Output Current .....                     | 70                                     | 70                                 | mA         |
| DC Output Voltage at Input to Filter (Approx.)   | 310                                    | 340                                | 240        |

\* AC plate supply voltage is measured without load.

RATING CHART

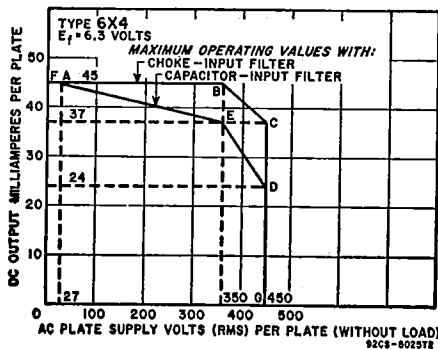


Refer to chart at end of section.

6X4W

Refer to chart at end of section.

6X5



6S


**FULL-WAVE  
VACUUM RECTIFIER**

6X5GT

Glass octal type used in power supply of automobile and ac-operated receivers. Outlines section, 13D; requires octal socket. This type may be supplied with pin No.1 omitted. For maximum ratings, and typical operation, refer to type 6X4.

Refer to chart at end of section.

6X8



9AK

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

6X8A

5X8, 19X8

Miniature type used as combined oscillator and mixer tube in television receivers utilizing an intermediate frequency in the order of 40 MHz and in AM/FM receivers. Outlines section, 6B; requires miniature 9-contact socket. Types 5X8 and 19X8 are identical with type 6X8A except for heater ratings.

|   |            |             |              |         |
|---|------------|-------------|--------------|---------|
| Heater Voltage (ac/dc) .....                                    | 5X8<br>4.7 | 6X8A<br>6.3 | 19X8<br>18.4 | volts   |
| Heater Current .....  | 0.6        | 0.45        | 0.16         | ampere  |
| Heater Warm-up Time (Average) .....                             | 11         | 11          | —            | seconds |
| Heater-Cathode Voltage:   |            |             |              |         |
| Peak value .....  | ±200 max   | ±200 max    | ±200 max     | volts   |
| Average value .....   | 100 max    | 100 max     | 100 max      | volts   |
| Direct Interelectrode Capacitances:                             |            |             |              |         |
| Triode Unit:  |            |             |              |         |
| Grid to Plate .....   | 1.5        | 1.5         |              | pF      |
| Grid to Cathode and Heater .....                                | 2          | 2.4         |              | pF      |
| Plate to Cathode and Heater .....                               | 0.5        | 1           |              | pF      |
| Pentode Unit:   |            |             |              |         |
| Grid No.1 to Plate .....  | 0.09 max   | 0.06 max    |              | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and<br>Grid No.3 ..... | 4.6        | 4.8         |              | pF      |
| Plate to Cathode, Heater, Grid No.2, and<br>Grid No.3 .....     | 0.9        | 1.6         |              | pF      |
| Pentode Grid No.1 to Triode Plate .....                         | 0.05 max   | 0.04 max    |              | pF      |
| Pentode Plate to Triode Plate .....                             | 0.05 max   | 0.008 max   |              | pF      |
| Heater to Cathode .....   | 6.5        | 6.5*        |              | pF      |

- With external shield connected to cathode except as noted.
- With external shield connected to pentode plate.

**Class A<sub>1</sub> Amplifier**



**MAXIMUM RATINGS (Design-Maximum Values)**

|   |                      |
|---|----------------------|
| Plate Voltage   | 275                  |
| Grid No.2 (Screen-Grid) Supply Voltage                | —                    |
| Grid-No.2 Voltage                                     | — See curve page 300 |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0                    |
| Plate Dissipation                                     | 1.7                  |
| Grid-No.2 Input:                                      |                      |
| For grid-No.2 voltages up to 137.5 volts              | —                    |
| For grid-No.2 voltages between 137.5 and 275 volts    | — See curve page 300 |

| Triode Unit | Pentode Unit       |       |
|-------------|--------------------|-------|
| 275         | 275                | volts |
| —           | 275                | volts |
| —           | See curve page 300 |       |
| 0           | 0                  | volts |
| 1.7         | 2.3                | watts |
| —           | 0.45               | watt  |
| —           | See curve page 300 |       |

**CHARACTERISTICS**


|  |                                |        |       |
|--|--------------------------------|--------|-------|
| Plate Voltage  | 125                            | 125    | volts |
| Grid No.3  | Connected to cathode at socket | 125    | volts |
| Grid-No.2 Voltage                                      | —                              | 125    | volts |
| Grid-No.1 Voltage                                      | —1                             | —1     | volt  |
| Amplification Factor                                   | 40                             | —      |       |
| Plate Resistance (Approx.)                             | 6000                           | 300000 | ohms  |
| Transconductance                                       | 6500                           | 5500   | μmhos |
| Plate Current  | 12                             | 9      | mA    |
| Grid-No.2 Current                                      | —                              | 2.2    | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μA | —7                             | —6.5   | volts |

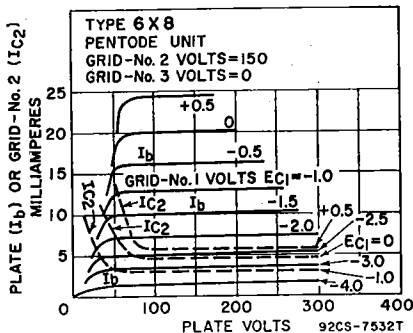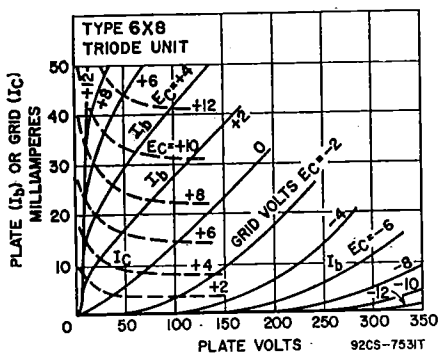

**6X9/  
ECF200**

**HIGH-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type used as if-amplifier tube in television receivers. Outlines section 6B, except has 10-pin base; requires miniature 10-contact socket.



10K

|  |          |        |
|--|----------|--------|
| Heater Voltage                                 | 6.3      | volts  |
| Heater Current                                 | 0.41     | ampere |
| Peak Heater-Cathode Voltage                    | ±150 max | volts  |
| Direct Interelectrode Capacitances:            |          |        |
| Triode Unit:                                   |          |        |
| Plate to All Other Elements (except grid)      | 3        | pF     |
| Grid to All Other Elements (except plate)      | 2.5      | pF     |
| Plate to Grid                                  | 2        | pF     |
| Pentode Unit:                                  |          |        |
| Plate to All Other Elements (except grid No.1) | 3.5      | pF     |
| Grid No.1 to All Other Elements (except plate) | 6.5      | pF     |
| Grid No.1 to Cathode                           | 4        | pF     |
| Plate to Grid No.1                             | < 6.5    | pF     |
| Grid No.1 to Grid No.2                         | 1.8      | pF     |

|   |      |    |
|---|------|----|
| Pentode Grid No.1 to Triode Plate ..... | 15   | pF |
| Pentode Grid No.1 to Triode Grid .....  | <1.2 | pF |
| Pentode Plate to Triode Plate .....     | <1.5 | pF |

**Class A<sub>1</sub> Amplifier**

| MAXIMUM RATINGS (Design-Maximum Values)      | Triode Unit | Pentode Unit |       |
|--|-------------|--------------|-------|
| Plate Supply Voltage .....                   | 550         | 550          | volts |
| Plate Voltage .....                          | 250         | 250          | volts |
| Peak Plate Voltage* .....                    | 600         | —            | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage ..... | —           | 550          | volts |
| Grid-No.2 Voltage .....                      | —           | 250          | volts |
| Cathode Current .....                        | 18          | 18           | mA    |
| Plate Dissipation .....                      | 1.5         | 2.1          | watts |
| Grid-No.2 Input .....                        | —           | 0.7          | watt  |

**CHARACTERISTICS**

|   |      |       |       |
|---|------|-------|-------|
| Plate Voltage .....                       | 170  | 160   | volts |
| Grid-No.3 (Suppressor-Grid) Voltage ..... | —    | 0     | volts |
| Grid-No.2 Voltage .....                   | —    | 135   | volts |
| Grid-No.1 (Control-Grid) Voltage .....    | —1   | —1.7  | volts |
| Mu Factor, Grid-No.1 to Grid-No.2 .....   | —    | 55    |       |
| Amplification Factor .....                | 55   | —     |       |
| Transconductance .....                    | 4800 | 14000 | μmhos |
| Plate Current .....                       | 8.5  | 18    | mA    |
| Grid-No.2 Current .....                   | —    | 5     | mA    |


**MAXIMUM CIRCUIT VALUES**

|                                    |   |   |        |
|------------------------------------|---|---|--------|
| Grid-No.1-Circuit Resistance ..... | 1 | 1 | megohm |
|------------------------------------|---|---|--------|

\* With a maximum duty factor of 0.18 and maximum pulse duration of 18 microseconds.

Refer to chart at end of section.

6Y5



7AC

**BEAM POWER TUBE**

**6Y6GA/  
6Y6G**

Glass octal type used as output amplifier in radio receivers and in rf-operated, high-voltage power supplies in television equipment. Outlines section, 19B; requires octal socket.

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | volts   |
| Heater Current .....   | 1.25     | amperes |
| Peak Heater-Cathode Voltage .....                            | ±180 max | volts   |
| Direct Interelectrode Capacitances (Approx.):                |          |         |
| Grid No.1 to Plate .....                                     | 0.7      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 12       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 7.5      | pF      |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**

|  |           |          |
|--|-----------|----------|
| Plate Voltage .....                                    | 200       | volts    |
| Grid-No.2 (Screen-Grid) Supply Voltage .....           | 200       | volts    |
| Grid-No.2 Voltage .....                                | See curve | page 300 |
| Plate Dissipation .....                                | 12.5      | watts    |
| Grid-No.2 Input:                                       |           |          |
| For grid-No.2 voltages up to 100 volts .....           | 1.75      | watts    |
| For grid-No.2 voltages between 100 and 200 volts ..... | See curve | page 300 |

**TYPICAL OPERATION**

|  |       |       |          |
|--|-------|-------|----------|
| Plate Voltage .....                    | 135   | 200   | volts    |
| Grid-No.2 Voltage .....                | 135   | 135   | volts    |
| Grid-No.1 (Control-Grid) Voltage ..... | —13.5 | —14   | volts    |
| Peak AF Grid-No.1 Voltage .....        | 13.5  | 14    | volts    |
| Zero-Signal Plate Current .....        | 58    | 61    | mA       |
| Maximum-Signal Plate Current .....     | 60    | 66    | mA       |
| Zero-Signal Grid-No.2 Current .....    | 3.5   | 2.2   | mA       |
| Maximum-Signal Grid-No.2 Current ..... | 11.5  | 9     | mA       |
| Plate Resistance (Approx.) .....       | 9300  | 18300 | ohms     |
| Transconductance .....                 | 7000  | 7100  | μmhos    |
| Load Resistance .....                  | 2000  | 2600  | ohms     |
| Total Harmonic Distortion .....        | 10    | 10    | per cent |
| Maximum-Signal Power Output .....      | 3.6   | 6     | watts    |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance:    | 0.1 | megohm |
| For fixed-bias operation .....   | 0.5 | megohm |
| For cathode-bias operation ..... |     |        |

**6Y6GT**

For replacement use type 6Y6GA/6Y6G.

**6Y7G**

Refer to chart at end of section.


**6Y9**

Refer to chart at end of section.

**6Y9/EFL200**

**DUAL PENTODE**

Miniature type for use in color and black-and-white television receiver applications. Unit No. 1 is used as a video output pentode, and unit No. 2 as a sound if amplifier, agc amplifier, or sync separator. Outlines section, 6L, except has 10-pin base; requires miniature 10-contact socket.



10L

|  |          |        |
|--|----------|--------|
| Heater Voltage .....                                 | 6.3      | volts  |
| Heater Current .....                                 | 0.8      | ampere |
| Peak Heater-Cathode Voltage .....                    | ±200 max | volts  |
| Direct Interelectrode Capacitances:                  |          |        |
| Unit No.1:   |          |        |
| Plate to All Other Elements (except grid No.1) ..... | 7        | pF     |
| Grid No.1 to All Other Elements (except plate) ..... | 12       | pF     |
| Plate to Grid No.1 .....                             | 95       | pF     |
| Unit No.2:   |          |        |
| Plate to All Other Elements (except grid No.1) ..... | 11       | pF     |
| Grid No.1 to All Other Elements (except plate) ..... | 10       | pF     |
| Plate to Grid No.1 .....                             | 140      | pF     |
| Grid No.1 to Heater .....                            | <100     | pF     |
| Plate to Plate .....                                 | <150     | pF     |
| Grid to Grid .....                                   | <10      | pF     |
| Plate (Unit No.1) to Grid No.1 (Unit No.2) .....     | <100     | pF     |
| Plate (Unit No.2) to Grid No.1 (Unit No.2) .....     | <5       | pF     |

**Class A<sub>1</sub> Amplifier**

| MAXIMUM RATINGS (Design-Maximum Values)      | Unit No.1 | Unit No.2 |       |
|--|-----------|-----------|-------|
| Plate Supply Voltage .....                   | 550       | 550       | volts |
| Plate Voltage .....                          | 250       | 250       | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage ..... | 550       | 550       | volts |
| Grid-No.2 Voltage .....                      | 250       | 250       | volts |
| Cathode Current .....                        | 60        | 15        | mA    |
| Plate Dissipation .....                      | 5         | 1.5       | watts |
| Grid-No.2 Input .....                        | 2.5       | 0.5       | watts |

**CHARACTERISTICS**

|   |       |      |       |
|---|-------|------|-------|
| Plate Voltage .....                     | 170   | 150  | volts |
| Grid-No.2 Voltage .....                 | 170   | 150  | volts |
| Grid-No.1 (Control-Grid) Voltage .....  | -2.6  | -2.3 | volts |
| Mu Factor, Grid-No.1 to Grid-No.2 ..... | 38    | 35   |       |
| Internal Resistance .....               | 40    | 160  | kohms |
| Transconductance .....                  | 21000 | 8500 | μmhos |
| Plate Current .....                     | 30    | 10   | mA    |
| Grid-No.2 Current .....                 | 6.5   | 3    | mA    |

**MAXIMUM CIRCUIT VALUES**

|                                    |   |   |        |
|------------------------------------|---|---|--------|
| Grid-No.1-Circuit Resistance ..... | 1 | 1 | megohm |
|------------------------------------|---|---|--------|

**6Z4**

Refer to chart at end of section.  
For replacement use type 84/6Z4.

**6Z5**

Refer to chart at end of section.

**6Z7G**

Refer to chart at end of section.

**6Z10**


Refer to chart at end of section.



**POWER PENTODE—  
GATED-BEAM  
DISCRIMINATOR**

**6Z10/6J10**

10Z10, 13Z10/13J10



12BT

Duodecator types used as a combined limiter, discriminator, and audio power-output tube in FM radio and television receivers. Outlines section, 8C; require duodecator 12-contact socket. Types 10Z10, and 13Z10/13J10 are identical with type 6Z10/6J10 except for heater ratings.

|                                     | 6Z10/6J10 | 10Z10    | 13Z10/13J10 |         |
|-------------------------------------|-----------|----------|-------------|---------|
| Heater Voltage (ac/dc) .....        | 6.3       | 10       | 13.2        | volts   |
| Heater Current .....                | 0.95      | 0.6      | 0.45        | ampere  |
| Heater Warm-up Time (Average) ..... | —         | 11       | 11          | seconds |
| Heater-Cathode Voltage:             |           |          |             |         |
| Peak value .....                    | ±200 max  | ±200 max | ±200 max    | volts   |
| Average value .....                 | 100 max   | 100 max  | 100 max     | volts   |

**Direct Interelectrode Capacitances:**

|  |  |  |       |    |
|--|--|--|-------|----|
| <b>Pentode Unit:</b>   |  |  |       |    |
| Grid No.1 to Grid No.3 .....   |  |  | 0.009 | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, Plate, and Internal Shield ..... |  |  | 4.4   | pF |
| Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2, Plate, and Internal Shield ..... |  |  | 3.2   | pF |
| <b>Beam Power Unit:</b>  |  |  |       |    |
| Grid No.1 to Plate .....   |  |  | 0.22  | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 .....                         |  |  | 11    | pF |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....                             |  |  | 7.5   | pF |

**Gated-Beam Unit as Limiter and Discriminator**

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |     |       |
|--|-----|-------|
| Plate Supply Voltage .....                   | 330 | volts |
| Grid-No.2 Voltage .....                      | 330 | volts |
| Grid-No.1 Voltage, Peak positive value ..... | 60  | volts |
| Average Cathode Current .....                | 13  | mA    |

**CHARACTERISTICS**

|  |     |     |     |       |
|--|-----|-----|-----|-------|
| Plate Voltage .....  | 135 | 135 | 135 | volts |
| Grid-No.3 (Suppressor-Grid) Voltage .....                    | 4   | 4   | 0   | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                 | —   | 280 | 280 | volts |
| Grid-No.2 Voltage .....                                      | 75  | —   | —   | volts |
| Grid No. 1 (Control-Grid) Voltage .....                      | 0   | 0   | 0   | volts |
| Grid-No.2 Resistor .....                                     | —   | 33  | 33  | kohms |
| Transconductance, Grid No.1 to Plate .....                   | —   | —   | 360 | μmhos |
| Transconductance, Grid No.3 to Plate .....                   | —   | —   | 700 | μmhos |
| Average Plate Current .....                                  | —   | 5   | —   | mA    |
| Grid-No.2 Current .....                                      | 4.5 | —   | —   | mA    |
| Grid No.1 Voltage (Approx.) for plate current of 20 μA ..... | —   | —   | —4  | volts |
| Grid No.3 Voltage (Approx.) for plate current of 20 μA ..... | —   | —   | —4  | volts |

**Pentode Unit as Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                       |     |       |
|---------------------------------------|-----|-------|
| Plate Voltage .....                   | 275 | volts |
| Grid-No.2 (Screen-Grid) Voltage ..... | 275 | volts |
| Plate Dissipation .....               | 10  | watts |
| Grid-No.2 Input .....                 | 2   | watts |

**TYPICAL OPERATION**

|   |      |          |
|---|------|----------|
| Plate Voltage .....                       | 250  | volts    |
| Grid-No.2 Voltage .....                   | 250  | volts    |
| Grid-No.1 (Control-Grid) Voltage .....    | —8   | volts    |
| Peak AF Grid-No.1 Voltage .....           | 8    | volts    |
| Zero-Signal Plate Current .....           | 35   | mA       |
| Maximum-Signal Plate Current .....        | 39   | mA       |
| Zero-Signal Grid-No.2 Current .....       | 3    | mA       |
| Maximum-Signal Grid-No.2 Current .....    | 13   | mA       |
| Plate Resistance (Approx.) .....          | 0.1  | megohm   |
| Transconductance .....                    | 6500 | μmhos    |
| Load Resistance .....                     | 5000 | ohms     |
| Total Harmonic Distortion (Approx.) ..... | 8.5  | per cent |
| Maximum-Signal Power Output .....         | 4.2  | watts    |

**MAXIMUM CIRCUIT VALUES**

|                                      |      |        |
|--------------------------------------|------|--------|
| <b>Grid-No.1-Circuit Resistance:</b> |      |        |
| For fixed-bias operation .....       | 0.25 | megohm |
| For cathode-bias operation .....     | 0.5  | megohm |

|                   |                                   |
|-------------------|-----------------------------------|
| <b>6ZY5G</b>      | Refer to chart at end of section. |
| <b>7A4</b>        | Refer to chart at end of section. |
| <b>7A5</b>        | Refer to chart at end of section. |
| <b>7A6</b>        | Refer to chart at end of section. |
| <b>7A7</b>        | Refer to chart at end of section. |
| <b>7A8</b>        | Refer to chart at end of section. |
| <b>7AD7</b>       | Refer to chart at end of section. |
| <b>7AF7</b>       | Refer to chart at end of section. |
| <b>7AG7</b>       | Refer to chart at end of section. |
| <b>7AH7</b>       | Refer to chart at end of section. |
| <b>7AU7</b>       | Refer to type 12AU7A.             |
| <b>7B4</b>        | Refer to chart at end of section. |
| <b>7B5</b>        | Refer to chart at end of section. |
| <b>7B6</b>        | Refer to chart at end of section. |
| <b>7B7</b>        | Refer to chart at end of section. |
| <b>7B8</b>        | Refer to chart at end of section. |
| <b>7C5</b>        | Refer to chart at end of section. |
| <b>7C6</b>        | Refer to chart at end of section. |
| <b>7C7</b>        | Refer to chart at end of section. |
| <b>7DJ8/PCC88</b> | Refer to chart at end of section. |
| <b>7E6</b>        | Refer to chart at end of section. |
| <b>7E7</b>        | Refer to chart at end of section. |
| <b>7EY6</b>       | Refer to chart at end of section. |
| <b>7F7</b>        | Refer to chart at end of section. |
| <b>7F8</b>        | Refer to chart at end of section. |
| <b>7G7</b>        | Refer to chart at end of section. |
| <b>7GS7</b>       | Refer to type 6GS7.               |

Refer to chart at end of section.

7H7

Refer to chart at end of section.

7HG8

Refer to type 6HG8/ECF86.


7HG8/PCF86

Refer to chart at end of section.

7J7

Refer to chart at end of section.

7K7



9GK

SHARP-CUTOFF PENTODE

7KY6

Miniature type with frame grid used as video output amplifier in color and black-and-white television receivers. Outlines section, 6E; requires miniature 9-contact socket.

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc)   | 7.3      | volts   |
| Heater Current   | 0.45     | ampere  |
| Heater Warm-up Time  | 11       | seconds |
| Heater-Cathode Voltage:  |          |         |
| Peak value   | ±200 max | volts   |
| Average value  | 100 max  | volts   |
| Direct Interelectrode Capacitances:  |          |         |
| Grid No.1 to Plate   | 0.16 max | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2,<br>Grid No.3, and Internal Shield | 14       | pF      |
| Plate to Cathode, Heater, Grid No.2,<br>Grid No.3, and Internal Shield     | 6        | pF      |


Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage   | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                | 330                | volts |
| Grid-No.2 Voltage                                     | See curve page 300 | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0                  | volts |
| Plate Dissipation                                     | 9                  | watts |
| Grid-No.2 Input:                                      |                    |       |
| For grid-No.2 voltages up to 165 volts                | 1                  | watt  |
| For grid-No.2 voltages between 165 and 330 volts      | See curve page 300 |       |

CHARACTERISTICS

|                          |                      |           |
|--------------------------|----------------------|-----------|
| Plate Supply Voltage     | 200                  | volts     |
| Grid-No.3 Voltage        | Connected to cathode | at socket |
| Grid-No.2 Supply Voltage | 135                  | volts     |
| Grid-No.1 Supply Voltage | 0                    | volts     |

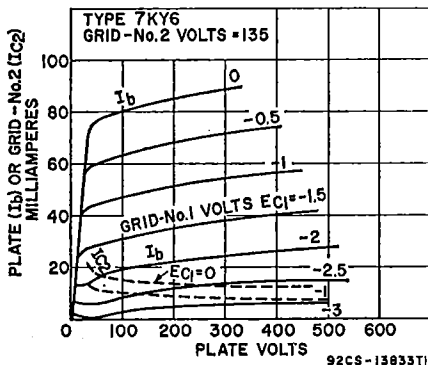


|  |       |            |
|--|-------|------------|
| Cathode-Bias Resistor .....  | 47    | ohms       |
| Plate Resistance (Approx.) .....                                   | 40000 | ohms       |
| Transconductance .....   | 30000 | $\mu$ mhos |
| Plate Current .....  | 30    | mA         |
| Grid-No.2 Current .....  | 5.2   | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | -4.5  | volts      |

**MAXIMUM CIRCUIT VALUES**

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.1  | megohm |
| For cathode-bias operation ..... | 0.25 | megohm |

|              |                                     |
|--------------|-------------------------------------|
| <b>7KZ6</b>  | Refer to chart at end of section.   |
| <b>7L7</b>   | Refer to chart at end of section.   |
| <b>7N7</b>   | Refer to chart at end of section.   |
| <b>7Q7</b>   | Refer to chart at end of section.   |
| <b>7R7</b>   | Refer to chart at end of section.   |
| <b>7S7</b>   | Refer to chart at end of section.   |
| <b>7V7</b>   | Refer to chart at end of section.   |
| <b>7W7</b>   | Refer to chart at end of section.   |
| <b>7X7</b>   | Refer to chart at end of section.   |
| <b>7Y4</b>   | Refer to chart at end of section.   |
| <b>7Z4</b>   | Refer to chart at end of section.   |
| <b>8A8</b>   | For replacement use type 9A8/PCF80. |
| <b>8AC10</b> | Refer to type 6AC10.                |
| <b>8AL9</b>  | Refer to chart at end of section.   |
| <b>8AR11</b> | Refer to type 6AR11.                |
| <b>8AU8</b>  | Refer to chart at end of section.   |
| <b>8AW8A</b> | Refer to type 6AW8A.                |
| <b>8B8</b>   | Refer to type 16A8/PCL82.           |
| <b>8B10</b>  | Refer to type 6B10.                 |
| <b>8BA8A</b> | Refer to type 6BA8A.                |
| <b>8BA11</b> | Refer to type 6BA11.                |
| <b>8BH8</b>  | Refer to chart at end of section.   |



12FU

DUAL PENTODE

8BM11

Duodecar type used as if amplifier in television receivers. Unit No.1 is a semiremote-cutoff pentode, and unit No. 2 is a sharp-cutoff pentode. Outlines section, 8B; requires duodecar 12-contact socket. Heater: volts (ac/dc), 8.4; amperes, 0.45; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

Class A<sub>1</sub> Amplifier

|  | Unit No.1                      | Unit No.2 |            |
|--|--------------------------------|-----------|------------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>                   |                                |           |            |
| Plate Voltage  | 160                            | 160       | volts      |
| Grid-No.3 (Suppressor-Grid) Voltage                              | 0                              | 0         | volts      |
| Grid-No.2 (Screen-Grid) Voltage                                  | 160                            | 160       | volts      |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value            | 0                              | 0         | volts      |
| Plate Dissipation  | 2.2                            | 2.2       | watts      |
| Grid-No.2 Input  | 0.55                           | 0.55      | watt       |
| <b>CHARACTERISTICS</b>   |                                |           |            |
| Plate Supply Voltage   | 125                            | 125       | volts      |
| Grid-No.3  | Connected to cathode at socket |           |            |
| Grid-No.2 Voltage  | 125                            | 125       | volts      |
| Cathode-Bias Resistor  | 56                             | 120       | ohms       |
| Plate Resistance (Approx.)                                       | 220000                         | 300000    | ohms       |
| Transconductance   | 8800                           | 8500      | $\mu$ mhos |
| Plate Current  | 14                             | 9         | mA         |
| Grid-No.2 Current  | 8.6                            | 2.5       | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A      | —                              | —5.5      | volts      |
| Grid-No.1 Voltage (Approx.) for transconductance of 50 $\mu$ mho | —16.5                          | —         | volts      |
| <b>MAXIMUM CIRCUIT VALUES</b>                                    |                                |           |            |
| Grid-No.1-Circuit Resistance, for cathode-bias operation         | 1                              | 0.25      | megohm     |

Refer to type 6BN8.


8BN8

Refer to chart at end of section.

8BN11

Refer to type 6BQ5.

8BQ5



12DM

SEMIREMOTE-CUTOFF  
DUAL PENTODE

8BQ11

11BQ11, 16BQ11

Duodecar type used as intermediate-frequency amplifier in television receivers. Outlines section, 8B; requires duodecar 12-contact socket. Types 11BQ11 and 16BQ11 are identical with type 8BQ11 except for heater ratings.

|                                | 8BQ11         | 11BQ11        | 16BQ11        |         |
|--------------------------------|---------------|---------------|---------------|---------|
| Heater Voltage (ac/dc)         | 8.4           | 11.2          | 16            | volts   |
| Heater Current                 | 0.6           | 0.45          | 0.315         | ampere  |
| Heater Warm-up Time (Average)  | 11            | 11            | 11            | seconds |
| <b>Heater-Cathode Voltage:</b> |               |               |               |         |
| Peak value                     | $\pm 200$ max | $\pm 200$ max | $\pm 200$ max | volts   |
| Average value                  | 100 max       | 100 max       | 100 max       | volts   |

Direct Interelectrode Capacitances:

|   | Unit No.1 | Unit No.2 |    |
|---|-----------|-----------|----|
| Grid No.1 to Plate  | 0.022     | 0.024     | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield                         | 10        | —         | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield                             | 2.8       | —         | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, Grid No.3 of Unit No.1, and Internal Shield | —         | 11        | pF |

|  |       |     |    |
|--|-------|-----|----|
| Plate to Cathode, Heater, Grid No.2, Grid No.3,<br>Grid No.3 of Unit No.1, and Internal Shield . . . . . | —     | 2.8 | pF |
| Plate of Unit No.1 to Plate of Unit No.2 . . . . .   | 0.015 |     | pF |
| Grid No.1 of Unit No.1 to Plate of Unit No.2 . . . . .   | 0.002 |     | pF |
| Grid No.1 of Unit No.2 to Plate of Unit No.1 . . . . .   | 0.008 |     | pF |
| Grid No.1 of Unit No.1 to Grid No.1 of Unit No.2 . . . . .   | 0.002 |     | pF |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|   | Unit No.1          | Unit No.2 |       |
|---|--------------------|-----------|-------|
| Plate Voltage . . . . .   | 330                | 330       | volts |
| Grid-No.3 (Suppressor-Grid) Voltage . . . . .                   | 0                  | 0         | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage . . . . .                | 330                | 330       | volts |
| Grid-No.2 Voltage . . . . .                                     | See curve page 300 |           |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value . . . . . | 0                  | 0         | volts |
| Plate Dissipation . . . . .                                     | 3.1                | 3.1       | watts |
| Grid-No.2 Input: . . . . .                                      | 0.65               | 0.65      | watt  |
| For grid-No.2 voltages up to 165 volts . . . . .                | See curve page 300 |           |       |
| For grid-No.2 voltages between 165 and 330 volts . . . . .      |                    |           |       |

#### CHARACTERISTICS

|  |                                |       |        |
|--|--------------------------------|-------|--------|
| Plate Supply Voltage . . . . .   | 125                            | 125   | volts  |
| Grid No.3 . . . . .  | Connected to cathode at socket |       |        |
| Grid-No.2 Voltage . . . . .  | 125                            | 125   | volts  |
| Cathode-Bias Resistor . . . . .  | 56                             | 56    | ohms   |
| Plate Resistance (Approx.) . . . . .                                     | 0.2                            | 0.2   | megohm |
| Transconductance . . . . .   | 10500                          | 13000 | μmhos  |
| Plate Current . . . . .  | 11                             | 11    | mA     |
| Grid-No.2 Current . . . . .  | 3.5                            | 3.8   | mA     |
| Grid-No.1 Voltage (Approx.) for plate current<br>of 20 μA . . . . .      | —                              | —3    | volts  |
| Grid-No.1 Voltage (Approx.) for transconductance<br>of 50 μmho . . . . . | —15                            | —     | volts  |


#### MAXIMUM CIRCUIT VALUES

|   |   |      |        |
|---|---|------|--------|
| Grid-No.1-Circuit Resistance, for cathode-bias<br>operation . . . . . | 1 | 0.25 | megohm |
|---|---|------|--------|

# 8BU11

## MEDIUM-MU TWIN TRIODE— SHARP-CUTOFF PENTODE

Duodecar type used in television receiver applications. Outlines section, 8C; requires duodecar 12-contact socket. Heater: volts (ac/dc), 7.8; amperes, 0.6; warm-up time, 11 seconds, maximum heater-cathode volts, ±200 peak, 100 average.




### Class A<sub>1</sub> Amplifier

|   | Pentode Unit       | Each Triode Unit |        |
|---|--------------------|------------------|--------|
| MAXIMUM RATINGS (Design-Maximum Values)                             | 330                | 330              | volts  |
| Plate Voltage . . . . .   | 330                | —                | volts  |
| Grid-No.2 (Screen-Grid) Supply Voltage . . . . .                    | See curve page 300 |                  |        |
| Grid-No.2 Voltage . . . . .   | 0                  | 0                | volts  |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value . . . . .     | 2.5                | 1.8              | watts  |
| Plate Dissipation . . . . .   |                    |                  | watt   |
| Grid-No.2 Input: . . . . .  | 0.55               | —                |        |
| For grid-No.2 voltages up to 165 volts . . . . .                    | See curve page 300 |                  |        |
| For grid-No.2 voltages between 165 and 330 volts . . . . .          |                    |                  |        |
| CHARACTERISTICS   | 125                | 125              | volts  |
| Plate Supply Voltage . . . . .                                      | 125                | —                | volts  |
| Grid-No.2 Voltage . . . . .   | —1                 | —                | volts  |
| Grid-No.1 Voltage . . . . .   | —                  | 68               | ohms   |
| Cathode-Bias Resistor . . . . .                                     | —                  | 43               | ohms   |
| Amplification Factor . . . . .                                      | 20000              | 50000            | ohms   |
| Plate Resistance (Approx.) . . . . .                                | 7500               | 8600             | μmhos  |
| Transconductance . . . . .  | 12                 | 13.5             | mA     |
| Plate Current . . . . .   | 4                  | —                | mA     |
| Grid-No.2 Current . . . . .   | —                  | —8               | volts  |
| Grid Voltage (Approx.) for plate current of 100 μA . . . . .        | —                  | —                | volts  |
| Grid-No.1 Voltage (Approx.) for plate current<br>of 30 μA . . . . . | —8                 | —                | volts  |
| MAXIMUM CIRCUIT VALUES  |                    |                  |        |
| Grid-No.1-Circuit Resistance:                                       |                    |                  |        |
| For fixed-bias operation . . . . .                                  | 0.5                | 0.5              | megohm |
| For cathode-bias operation . . . . .                                | 1                  | 1                | megohm |

Refer to chart at end of section.  
 For replacement use type 8FQ7/8CG7.  
 Refer to type 6CM7.  
 Refer to type 6CN7.  
 Refer to type 6CS7.  
 Refer to type 6CW5/EL86.  
 Refer to type 6CW5.  
 Refer to type 6CX8.  
 Refer to chart at end of section.  
 For replacement use type 8GN8/8EB8.  
 Refer to type 6EM5.  
 Refer to chart at end of section.  
 Refer to chart at end of section.  
 Refer to type 6FQ7/6CG7.  
 Refer to chart at end of section.  
 Refer to type 6GJ7/ECF801.

8CB11  
 8CG7  
 8CM7  
 8CN7  
 8CS7  
 8CW5/XL86  
 8CW5  
 8CX8  
 8EB8  
 8EM5  
 8ET7  
 8FQ7  
 8FQ7/8CG7  
 8GJ7  
 8GJ7/PCF801  
 8GN8  
 8GN8/8EB8  
 8GU7  
 8JU8A  
 8JV8  
 8KA8  
 8LC8  
 8LT8  
 9A8

Refer to type 6GN8.  
 Refer to type 6GU7.  
 Refer to type 6JU8A.  
 Refer to type 6JV8.  
 Refer to type 6KA8.  
 Refer to type 6LC8.  
 Refer to type 6LT8.  
 Refer to chart at end of section.



**MEDIUM-MU TRIODE—  
 SHARP-CUTOFF PENTODE**

**9A8/  
 PCF80**

**9DC** Miniature type used as combined oscillator and mixer tubes in vhf color and black-and-white television receivers. Outlines section, 6B; requires miniature 9-contact socket. Heater: volts (ac/dc), 9; amperes, 0.3; maximum heater-cathode volts, +100, -200 peak; -120 average.

**Class A<sub>1</sub> Amplifier**

| MAXIMUM RATINGS (Design-Center Values) | Triode Unit | Pentode Unit |       |
|--|-------------|--------------|-------|
| Plate Supply Voltage .....             | 550         | 550          | volts |
| Plate Voltage .....                    | 250         | 250          | volts |
| Grid-No.2 (Screen-Grid) Voltage .....  | —           | 175          | volts |
| Cathode Current .....                  | 14          | 14           | mA    |
| Plate Dissipation .....                | 1.5         | 1.7          | watts |
| Grid-No.2 Input .....                  | —           | 0.5          | watt  |

**CHARACTERISTICS**

|                                  |      |      |            |
|----------------------------------|------|------|------------|
| Plate Voltage .....              | 100  | 170  | volts      |
| Grid-No.2 Voltage .....          | —    | 170  | volts      |
| Grid-No.1 Voltage .....          | —2   | —2   | volts      |
| Amplification Factor .....       | 20   | 47*  |            |
| Plate Resistance (Approx.) ..... | —    | 0.4  | megohm     |
| Transconductance .....           | 5000 | 6200 | $\mu$ mhos |
| Plate Current .....              | 14   | 10   | mA         |
| Grid-No 2 Current .....          | —    | 2.8  | mA         |

**MAXIMUM CIRCUIT VALUES**


|                                  |     |     |        |
|----------------------------------|-----|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |     |        |
| For fixed-bias operation .....   | 0.5 | 0.5 | megohm |
| For cathode-bias operation ..... | 0.5 | 1   | megohm |

\* Grid No.2 to Grid No.1.

|                    |                                   |
|--------------------|-----------------------------------|
| <b>9AH9</b>        | Refer to chart at end of section. |
| <b>9AK10</b>       | Refer to chart at end of section. |
| <b>9AM10</b>       | Refer to chart at end of section. |
| <b>9AQ8/PCC85</b>  | Refer to chart at end of section. |
| <b>9AU7</b>        | Refer to type 12AU7A.             |
| <b>9BJ11</b>       | Refer to chart at end of section. |
| <b>9BR7</b>        | Refer to chart at end of section. |
| <b>9CL8</b>        | Refer to chart at end of section. |
| <b>9EA8</b>        | Refer to chart at end of section. |
| <b>9GH8A</b>       | Refer to type 6GH8A.              |
| <b>9GV8</b>        | Refer to chart at end of section. |
| <b>9GV8/XCL85</b>  | Refer to type 6GV8/ECL85.         |
| <b>9JW8/PCF802</b> | Refer to type 6JW8/ECF802.        |
| <b>9KC6</b>        | Refer to chart at end of section. |

**9KX6****SHARP-CUTOFF PENTODE**

Miniature type with frame grid used as video output amplifier in color and black-and-white television receivers. Outlines section, 6E; requires miniature 9-contact socket. Heater: volts, 8.7; amperes, 0.45; warm-up time, 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**9GK****Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....                                       | 400                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value ..... | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....              | 330                | volts |
| Grid-No.2 Voltage .....                                   | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive value .....    | 0                  | volts |
| Plate Dissipation .....                                   | 11.5               | watts |
| Grid-No.2 Input .....                                     | 1.5                | watts |

**CHARACTERISTICS**

|                                |           |                      |       |
|--------------------------------|-----------|----------------------|-------|
| Plate Voltage .....            | 250       | 50                   | volts |
| Grid-No.3 Voltage .....        | Connected | to cathode at socket |       |
| Grid-No.2 Supply Voltage ..... | 150       | 125                  | volts |
| Grid-No.1 Voltage .....        | 0         | 0                    | volts |



|   |       |    |            |
|---|-------|----|------------|
| Cathode-Bias Resistor, Bypassed .....                                 | 56    | —  | ohms       |
| Plate Resistance (Approx.) .....                                      | 50000 | —  | ohms       |
| Transconductance (Grid No.1 to Plate) .....                           | 36000 | —  | $\mu$ mhos |
| Plate Current .....   | 28    | 70 | mA         |
| Grid-No.2 Current .....   | 6.5   | 24 | mA         |
| Grid-No.1 Voltage (Approx.) for plate current<br>of 100 $\mu$ A ..... | —5.7  | —  | volts      |

**MAXIMUM CIRCUIT VALUES**


|                                  |  |      |        |
|----------------------------------|--|------|--------|
| Grid-No.1-Circuit Resistance:    |  |      |        |
| For fixed-bias operation .....   |  | 0.1  | megohm |
| For cathode-bias operation ..... |  | 0.25 | megohm |

|                                   |                    |
|-----------------------------------|--------------------|
| Refer to type 6KZ8.               | <b>9KZ8</b>        |
| Refer to chart at end of section. | <b>9LA6</b>        |
| For replacement use type 10DE7.   | <b>9RAL1</b>       |
| Refer to type 6U8A.               | <b>9U8A</b>        |
| Refer to chart at end of section. | <b>10</b>          |
| Refer to type 6AL11.              | <b>10AL11</b>      |
| Refer to type 6BQ5.               | <b>10BQ5</b>       |
| Refer to chart at end of section. | <b>10C8</b>        |
| Refer to chart at end of section. | <b>10CW5</b>       |
| Refer to type 6CW5/EL86.          | <b>10CW5/LL86</b>  |
| Refer to type 6DE7.               | <b>10DE7</b>       |
| Refer to type 6DR7.               | <b>10DR7</b>       |
| Refer to chart at end of section. | <b>10DX8</b>       |
| Refer to type 6DX8/ECL84.         | <b>10DX8/LCL84</b> |
| Refer to chart at end of section. | <b>10EG7</b>       |
| Refer to type 6EM7.               | <b>10EM7</b>       |
| Refer to type 6EW7.               | <b>10EW7</b>       |
| Refer to chart at end of section. | <b>10GF7</b>       |
| Refer to type 6GF7A.              | <b>10GF7A</b>      |
| Refer to type 6GK6.               | <b>10GK6</b>       |
| Refer to type 6GN8.               | <b>10GN8</b>       |
| Refer to type 6GV8/ECL85.         | <b>10GV8/LCL85</b> |
| Refer to type 6HF8.               | <b>10HF8</b>       |
| Refer to type 10JA8/10LZ8         | <b>10JA8</b>       |

# 10JA8/ 10LZ8

## HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receiver applications. The triode unit is used as a sync separator, sync clipper, and phase inverter; the pentode unit is used as a video amplifier. Outlines section, 6E; requires miniature 9-contact socket.



9DX



|   |           |         |
|---|-----------|---------|
| Heater Voltage (ac/dc)  | 10.5      | volts   |
| Heater Current  | 0.45      | ampere  |
| Heater Warm-up Time   | 11        | seconds |
| Heater-Cathode Voltage:   |           |         |
| Peak value  | ±200 max  | volts   |
| Average value   | 100 max   | volts   |
| Direct Interelectrode Capacitances:   |           |         |
| Triode Unit:  |           |         |
| Grid to Plate   | 4         | pF      |
| Grid to Cathode, Pentode Cathode, Heater, Pentode Grid No.3, and Internal Shield  | 2.6       | pF      |
| Plate to Cathode, Pentode Cathode, Heater, Pentode Grid No.3, and Internal Shield | 2.6       | pF      |
| Pentode Unit:   |           |         |
| Grid No.1 to Plate  | 0.1 max   | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield           | 11        | pF      |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield               | 4.4       | pF      |
| Grid No.1 to Triode Plate   | 0.005 max | pF      |
| Plate to Triode Grid  | 0.018 max | pF      |
| Plate to Triode Plate   | 0.17 max  | pF      |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |     |                    |
|---|-----|--------------------|
| Plate Voltage   | 300 | volts              |
| Grid-No.2 (Screen-Grid) Supply Voltage                | —   | See curve page 300 |
| Grid-No.2 Voltage                                     | 0   | volts              |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 1   | watts              |
| Plate Dissipation                                     | —   | See curve page 300 |
| Grid-No.2 Input:                                      | 1.5 | watts              |
| For Grid-No.2 voltages up to 165 volts                | —   | See curve page 300 |
| For Grid-No.2 voltages between 165 and 330 volts      | —   | See curve page 300 |

| Triode Unit | Pentode Unit       |       |
|-------------|--------------------|-------|
| 300         | 330                | volts |
| —           | 330                | volts |
| —           | See curve page 300 |       |
| 0           | 0                  | volts |
| 1           | 5                  | watts |
| —           | 1.5                | watts |
| —           | See curve page 300 |       |

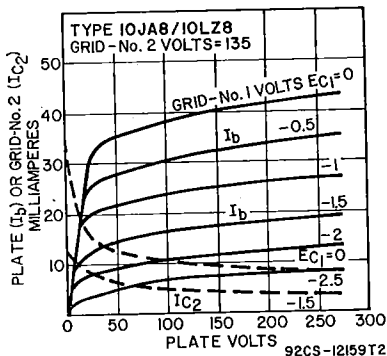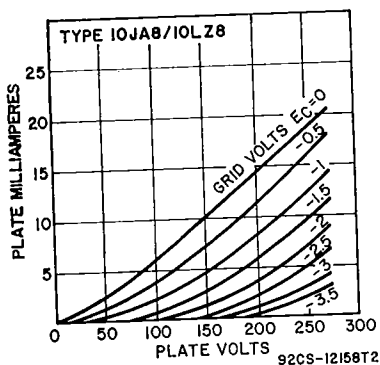

#### CHARACTERISTICS

|                      | Triode Unit |       | Pentode Unit |       |       |            |
|----------------------|-------------|-------|--------------|-------|-------|------------|
| Plate Voltage        | 135         | 200   | 30           | 135   | 200   | volts      |
| Grid-No.2 Voltage    | —           | —     | 135          | 135   | 135   | volts      |
| Grid-No.1 Voltage    | —2          | —2    | 0            | —1.5  | —1.5  | volts      |
| Amplification Factor | 60          | 70    | —            | —     | —     |            |
| Plate Resistance     | 39000       | 19000 | —            | 66000 | 70000 | ohms       |
| Transconductance     | 1550        | 3700  | —            | 12600 | 14000 | $\mu$ mhos |

|  |      |     |     |     |    |       |
|--|------|-----|-----|-----|----|-------|
| Plate Current .....  | 1    | 3.5 | 32* | 17  | 18 | mA    |
| Grid-No.2 Current .....  | —    | —   | 14* | 4.2 | 4  | mA    |
| Grid-No.1 Voltage (Approx.)<br>for plate current of 10 $\mu$ A | -4.8 | -7  | —   | -5  | -5 | volts |


**MAXIMUM CIRCUIT VALUES**

|                                  |  |             |              |        |
|----------------------------------|--|-------------|--------------|--------|
| Grid-No.1-Circuit Resistance:    |  | Triode Unit | Pentode Unit |        |
| For fixed-bias operation .....   |  | 0.5         | 0.25         | megohm |
| For cathode-bias operation ..... |  | 1           | 1            | megohm |

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

Refer to type 6JT8.

10JT8



9DX

100 average (-300 peak, -200 average for triode unit).

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

10JY8

Miniature type used in television receiver applications. The pentode unit is used as a video amplifier, and the triode unit as a sync separator. Outlines section, 6E; requires miniature 9-contact socket. Heater: volts (ac/dc), 10.5; amperes, 0.45; warm-up time (average), 11 seconds; maximum heater-cathode volts,  $\pm$ 200 peak,

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage .....                                   | 330         | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....          | —           | 330                | volts |
| Grid-No.2 Voltage .....                               | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0           | 0                  | volts |
| Plate Dissipation .....                               | 2           | 5                  | watts |
| Grid-No.2 Input:                                      |             |                    |       |
| For Grid-No.2 voltages up to 165 volts .....          | —           | 1.1                | watts |
| For Grid-No.2 voltages between 165 and 330 volts      | —           | See curve page 300 |       |

**CHARACTERISTICS**

|   |       |     |       |            |
|---|-------|-----|-------|------------|
| Plate Voltage .....                                       | 125   | 50  | 200   | volts      |
| Grid-No.2 Voltage .....                                   | —     | 150 | 150   | volts      |
| Grid-No.1 Voltage .....                                   | —     | 0   | —     | volts      |
| Cathode-Bias Resistor .....                               | 68    | —   | 100   | ohms       |
| Amplification Factor .....                                | 46    | —   | —     |            |
| Plate Resistance (Approx.) .....                          | 4400  | —   | 55000 | ohms       |
| Transconductance .....                                    | 10400 | —   | 11000 | $\mu$ mhos |
| Plate Current .....                                       | 15    | 60* | 24    | mA         |
| Grid-No.2 Current .....                                   | —     | 18* | 4.8   | mA         |
| Grid Voltage (Approx.) for plate current of 10 $\mu$ A .. | -8    | —   | -10   | volts      |

**MAXIMUM CIRCUIT VALUES**

|                                |  |     |      |        |
|--------------------------------|--|-----|------|--------|
| Grid-No.1-Circuit Resistance:  |  | 0.5 | 0.25 | megohm |
| For fixed-bias operation ..... |  | 1   | 1    | megohm |

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

Refer to type 6KR8.

10KR8

Refer to type 6KU8.

10KU8

Refer to chart at end of section.

10LB8

Refer to type 6LE8.

10LE8

Refer to chart at end of section.

10LW8

Refer to chart at end of section.

10LZ8

For replacement use type 10JA8/10LZ8.

Refer to type 6T10.

10T10

**10Z10**

Refer to type 6Z10.

**11**

Refer to chart at end of section.

**11AF9**

Refer to type 6AF9.


**11AR11**

Refer to type 6AR11.

**11BM8****HIGH-MU TRIODE—  
POWER PENTODE**

Miniature type used as vertical deflection oscillator or af amplifier and vertical deflection amplifier or af power amplifier in television receivers. **Outlines section, 6G**; requires miniature 9-contact socket. This type is identical with type 16A8/PCL82 except for the following items:


|                |       |      |       |
|----------------|-------|------|-------|
| Heater Voltage | ..... | 10.7 | volts |
| Heater Current | ..... | 0.45 | mA    |

**9EX****11BQ11**

Refer to type 8BQ11.

**11BT11****DUAL TRIODE—  
SHARP-CUTOFF PENTODE**

Duodecarr type used in television receiver applications. The triode units are used for general-purpose applications; the pentode unit is used in video-amplifier service. **Outlines section, 8B**; requires duodecarr 12-contact socket. **Heater: volts (ac/dc), 10.7; amperes, 0.6; warm-up time (average), 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.**

**12GS****Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|  | Triode<br>Unit No. 1 | Triode<br>Unit No. 2 | Pentode<br>Unit |     |       |
|--|----------------------|----------------------|-----------------|-----|-------|
| Plate Voltage  | 330                  | 330                  | 165             | 165 | volts |
| Grid-No.2 (Screen-Grid) Voltage                          | —                    | —                    | 165             | —   | volts |
| Grid-No.1 (Control-Grid) Voltage,<br>Positive-bias value | 0                    | 0                    | 0               | —   | volts |
| Plate Dissipation  | 1.5                  | 2                    | 3.5             | —   | watts |
| Grid-No.2 Input  | —                    | —                    | 1.5             | —   | watts |

**CHARACTERISTICS**

|   |       |      |      |       |            |
|---|-------|------|------|-------|------------|
| Plate Voltage   | 200   | 200  | 35   | 150   | volts      |
| Grid-No.2 Voltage   | —     | —    | 100  | 100   | volts      |
| Grid-No.1 Voltage   | —     | —    | 0    | —     | volts      |
| Cathode-Bias Resistor   | 270   | 470  | —    | 82    | ohms       |
| Amplification Factor  | 69    | 40   | —    | —     | —          |
| Plate Resistance (Approx.)                                      | 12500 | 7600 | —    | 51000 | ohms       |
| Transconductance  | 5500  | 5300 | —    | 19000 | $\mu$ mhos |
| Plate Current   | 7.1   | 7.2  | 54   | 17.4  | mA         |
| Grid-No.2 Current   | —     | —    | 13.5 | 3.2   | mA         |
| Grid-No.1 Voltage (Approx.) for<br>plate current of 100 $\mu$ A | —     | —8   | —    | —6.6  | volts      |
| Grid-No.1 Voltage (Approx.) for<br>plate current of 50 $\mu$ A  | —5.5  | —    | —    | —     | volts      |

**MAXIMUM CIRCUIT VALUES**

|                               | Triode<br>Unit No. 1 | Triode<br>Unit No. 2 | Pentode<br>Unit |   |        |
|-------------------------------|----------------------|----------------------|-----------------|---|--------|
| Grid-No.1-Circuit Resistance: |                      |                      |                 |   |        |
| For fixed-bias operation      | 0.5                  | 0.5                  | 0.05            | — | megohm |
| For cathode-bias operation    | 1                    | 1                    | 0.1             | — | megohm |

Refer to chart at end of section.

11CA11

Refer to chart at end of section.

11CF11

Refer to chart at end of section.

11CH11

Refer to chart at end of section.


11CY7

Refer to type 6DS5.

11DS5

Refer to type 6FY7.

11FY7



9BF

### SHARP-CUTOFF PENTODE

### 11HM7


Miniature type with frame grid used as video output amplifier in color television receivers. Outlines section, 6E; requires miniature 9-contact socket.

|  |        |          |        |
|--|--------|----------|--------|
| Heater Arrangement .....   | Series | Parallel |        |
| Heater Voltage (ac/dc) .....   | 11     | 5.5      | volts  |
| Heater Current .....   | 0.3    | 0.6      | ampere |
| Heater-Cathode Voltage:  |        |          |        |
| Peak value .....   |        | ±200 max | volts  |
| Average value .....  |        | 100 max  | volts  |
| Direct Interelectrode Capacitances:  |        |          |        |
| Grid No.1 to Plate .....   |        | 0.15 max | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield ..... |        | 14       | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield .....     |        | 5        | pF     |

#### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 7                  | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 1                  | watt  |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

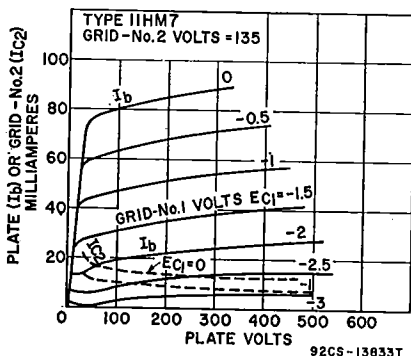

92CS-13633T

#### CHARACTERISTICS

|                             |     |       |
|-----------------------------|-----|-------|
| Plate Supply Voltage .....  | 200 | volts |
| Grid-No.3 Voltage .....     | 0   | volts |
| Grid-No.2 Voltage .....     | 135 | volts |
| Cathode-Bias Resistor ..... | 47  | ohms  |

|  |       |           |
|--|-------|-----------|
| Plate Resistance (Approx.) .....                                   | 40000 | ohms      |
| Transconductance .....   | 30000 | $\mu$ hos |
| Plate Current .....  | 30    | mA        |
| Grid-No.2 Current .....  | 5.2   | mA        |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | -4.5  | volts     |
| <b>MAXIMUM CIRCUIT VALUES</b>                                      |       |           |
| Grid-No.1-Circuit Resistance:                                      |       |           |
| For fixed-bias operation .....                                     | 0.1   | megohm    |
| For cathode-bias operation .....                                   | 0.25  | megohm    |

**11JE8**

Refer to chart at end of section.

**11KV8**

Refer to type 6KV8.

**11LQ8**


Refer to type 6LQ8.

**11LT8**

Refer to type 6LT8.

**11MS8****HIGH-MU TRIODE—  
BEAM POWER TUBE**

Miniature type used in combined vertical-deflection-oscillator and vertical-deflection-amplifier applications in black-and-white television receivers. Outlines section, 6G; requires miniature 9-contact socket. Heater: volts, 11.6; ampere, 0.45; warm-up time (approx.), 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**9LY****Class A<sub>1</sub> Amplifier****CHARACTERISTICS**

|   | Triode Unit |      | Beam Power Unit |           |
|---|-------------|------|-----------------|-----------|
|   | 100         | 100  | 120             | volts     |
| Plate Voltage .....                     | —           | —    | 110             | volts     |
| Grid-No. 1 (Control-Grid) Voltage ..... | -0.85       | 0    | -10             | volts     |
| Grid-No. 1 (Control-Grid) Voltage ..... | 5           | 10   | 50              | mA        |
| Plate Current .....                     | —           | —    | 3               | mA        |
| Grid-No. 2 Current .....                | 5500        | 7000 | 8500            | $\mu$ hos |
| Transconductance .....                  | 60          | 63   | 5.8             |           |
| Amplification Factor* .....             | 11          | 9    | 13              | kilohms   |
| Plate Resistance (Approx.) .....        |             |      |                 |           |

**Vertical-Deflection Oscillator and Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |     |      |       |
|--|-----|------|-------|
| Plate Voltage .....                      | 250 | 250  | volts |
| Peak Positive Pulse Plate Voltage# ..... | —   | 2000 | volts |
| Grid-No. 2 Voltage .....                 | —   | 200  | volts |
| Grid-No. 1 Voltage .....                 | —   | 0    | volts |
| Plate Dissipation .....                  | 0.5 | 6    | watts |
| Grid-No. 2 Input .....                   | —   | 1.5  | watts |
| Average Cathode Current .....            | 15  | 70   | mA    |

**MAXIMUM CIRCUIT VALUES**

|                                     |     |   |         |
|-------------------------------------|-----|---|---------|
| Grid-No. 1 Circuit Resistance ..... | —   | 2 | megohm  |
| Grid-No. 1 Circuit Resistance:      |     |   |         |
| For fixed-bias operation .....      | 1   | — | megohm  |
| For cathode-bias operation .....    | 3.3 | — | megohms |

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

\* Grid-No. 2 connected to plate at socket.

**11Y9**

Refer to chart at end of section.

**11Y9/LFL200**

Refer to chart at end of section.

**12A5**

Refer to chart at end of section.

**12A6**

Refer to chart at end of section.

Refer to chart at end of section.


12A6Y

Refer to chart at end of section.

12A7

Refer to chart at end of section.

12A8GT



9EU

BEAM POWER TUBE

12AB5

Miniature type used in the output stage of automobile radio receivers operating from a 12-volt storage battery. Outlines section, 6E; requires miniature 9-contact socket.

|  |            |        |
|--|------------|--------|
| Heater-Voltage Range (ac/dc)*                          | 10 to 15.9 | volts  |
| Heater Current (Approx.) at 12.6 volts                 | 0.2        | ampere |
| Peak Heater-Cathode Voltage                            | ±90 max    | volts  |
| Direct Interelectrode Capacitances:                    |            |        |
| Grid No.1 to Plate                                     | 0.7 max    | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 8          | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | 8.5        | pF     |

\* For longest life, it is recommended that the heater be operated within the voltage range of 11 to 14 volts.

Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Center Values)

|                                     |     |       |
|-------------------------------------|-----|-------|
| Plate Voltage                       | 315 | volts |
| Grid-No.2 (Screen-Grid) Voltage     | 285 | volts |
| Plate Dissipation                   | 12  | watts |
| Grid-No.2 Input                     | 2   | watts |
| Bulb Temperature (At hottest point) | 250 | °C    |

TYPICAL OPERATION WITH 12.6 VOLTS ON HEATER

|                                  |       |       |          |
|----------------------------------|-------|-------|----------|
| Plate Supply Voltage             | 250   | 250   | volts    |
| Grid-No.2 Supply Voltage         | 200   | 250   | volts    |
| Grid-No.1 (Control-Grid) Voltage | —     | —12.5 | volts    |
| Cathode-Bias Resistor            | 270   | —     | ohms     |
| Peak AF Grid-No.1 Voltage        | 10.5  | 12.5  | volts    |
| Zero-Signal Plate Current        | 33.5  | 45    | mA       |
| Maximum-Signal Plate Current     | 36    | 47    | mA       |
| Zero-Signal Grid-No.2 Current    | 1.6   | 4.5   | mA       |
| Maximum-Signal Grid-No.2 Current | 3.2   | 7     | mA       |
| Plate Resistance (Approx.)       | 75000 | 50000 | ohms     |
| Transconductance                 | 4000  | 4100  | μmhos    |
| Load Resistance                  | 6000  | 5000  | ohms     |
| Total Harmonic Distortion        | 8     | 8     | per cent |
| Maximum-Signal Power Output      | 3.3   | 4.5   | watts    |

MAXIMUM CIRCUIT VALUES

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |

Push-Pull Class AB<sub>1</sub> Amplifier


MAXIMUM RATINGS (Same as for Single-Tube Class A<sub>1</sub> Amplifier)

TYPICAL OPERATION WITH 12.6 VOLTS ON HEATER (Values are for two tubes)

|  |       |          |
|--|-------|----------|
| Plate Voltage                              | 250   | volts    |
| Grid-No.2 Voltage                          | 250   | volts    |
| Grid-No.1 Voltage                          | —15   | volts    |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage     | 30    | volts    |
| Zero-Signal Plate Current                  | 70    | mA       |
| Maximum-Signal Plate Current               | 79    | mA       |
| Zero-Signal Grid-No.2 Current              | 5     | mA       |
| Maximum-Signal Grid-No.2 Current           | 13    | mA       |
| Effective Load Resistance (Plate-to-Plate) | 10000 | ohms     |
| Total Harmonic Distortion                  | 5     | per cent |
| Maximum-Signal Power Output                | 10    | watts    |

MAXIMUM CIRCUIT VALUES

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |

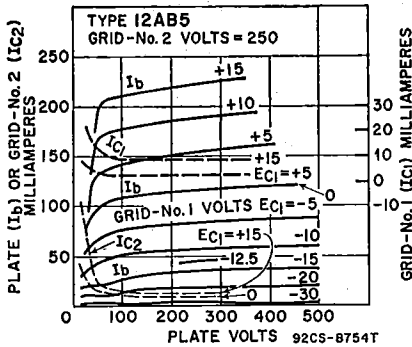

12AC6

Refer to chart at end of section.

12AC10A

Refer to type 6AC10

12AD6

Refer to chart at end of section.

12AE6

Refer to chart at end of section.

12AE6A


12AE7

Refer to chart at end of section.

## 12AE10

### BEAM POWER TUBE— SHARP-CUTOFF PENTODE

Duodecar type used as combined FM detector and audio-frequency output amplifier in television receivers. The beam power unit is used in af output stages and the pentode unit as an FM detector. Outlines section, 8C; requires duodecar 12-contact socket. Heater: volts (ac/dc), 12.6; amperes, 0.45; warm-up time (average), 11 seconds; maximum heater-cathode volts,  $\pm 200$



12EZ

peak, 100 average.

#### Beam Power Unit as Class A<sub>1</sub> Amplifier

##### MAXIMUM RATINGS (Design-Maximum Values)

|                                 |      |       |
|---------------------------------|------|-------|
| Plate Voltage                   | 165  | volts |
| Grid-No.2 (Screen-Grid) Voltage | 160  | volts |
| Cathode Current                 | 60   | mA    |
| Plate Dissipation               | 6    | watts |
| Grid-No.2 Input                 | 1.25 | watts |

##### TYPICAL OPERATION

|                                     |       |            |
|-------------------------------------|-------|------------|
| Plate Voltage                       | 145   | volts      |
| Grid-No.2 Voltage                   | 110   | volts      |
| Grid-No.1 (Control-Grid) Voltage    | -7    | volts      |
| Peak AF Grid-No.1 Voltage           | 7     | volts      |
| Zero-Signal Plate Current           | 34    | mA         |
| Maximum-Signal Plate Current        | 39    | mA         |
| Zero-Signal Grid-No.2 Current       | 6.5   | mA         |
| Maximum-Signal Grid-No.2 Current    | 9.3   | mA         |
| Plate Resistance (Approx.)          | 33000 | ohms       |
| Transconductance                    | 5600  | $\mu$ mhos |
| Load Resistance                     | 2500  | ohms       |
| Total Harmonic Distortion (Approx.) | 12    | per cent   |
| Maximum-Signal Power Output         | 1.45  | watts      |

##### MAXIMUM CIRCUIT VALUE

|   |   |        |
|---|---|--------|
| Grid-No.1-Circuit Resistance:<br>For cathode-bias operation | 1 | megohm |
|---|---|--------|



Pentode Unit as Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|   |      |            |
|---|------|------------|
| Plate Voltage .....   | 150  | volts      |
| Grid-No.3 (Suppressor-Grid) Voltage .....                         | 0    | volts      |
| Grid-No.2 Voltage .....   | 100  | volts      |
| Cathode-Bias Resistor .....                                       | 560  | ohms       |
| Plate Resistance (Approx.) .....                                  | 0.15 | megohm     |
| Transconductance, Grid No.1 .....                                 | 1000 | $\mu$ mhos |
| Transconductance, Grid No.3 .....                                 | 400  | $\mu$ mhos |
| Plate Current .....   | 1.3  | mA         |
| Grid-No.2 Current .....   | 2    | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 10 $\mu$ A ..... | -4.5 | volts      |
| Grid-No.3 Voltage (Approx.) for plate current of 10 $\mu$ A ..... | -4.5 | volts      |

Pentode Unit as FM Detector

MAXIMUM RATINGS (Design-Maximum Values)

|  |                    |       |
|--|--------------------|-------|
| Plate Voltage .....                          | 330                | volts |
| Grid-No.3 Voltage .....                      | 28                 | volts |
| Grid-No.2 Supply Voltage .....               | 330                | volts |
| Grid-No.2 Voltage .....                      | See curve page 300 |       |
| Grid-No.1 Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                      | 1.7                | watts |
| Grid-No.2 Input .....                        | 1.1                | watts |

Refer to type 6AF3.

**12AF3**  
**12AF3/12BR3/**  
**12RK19**

Refer to chart at end of section.

**12AF6**

Refer to chart at end of section.

**12AH7GT**

Refer to chart at end of section.

**12AJ6**

Refer to type 6AL5.

**12AL5**

Refer to chart at end of section.

**12AL8**

Refer to type 6AL11.


**12AL11**

Refer to type 6AQ5A.

**12AQ5**

Refer to type 6AT6.

**12AT6**



**9A**

**HIGH-MU TWIN TRIODE**

**12AT7**  
**12AT7/**  
**ECC81**

Miniature types used as push-pull cathode-drive amplifiers or frequency converters in the FM and television broadcast bands. Outlines section, 6B; require miniature 9-contact socket. Each triode unit is independent of the other except for the common heater. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section.

|                                   |        |              |        |
|-----------------------------------|--------|--------------|--------|
| Heater Arrangement:               | Series | Parallel     |        |
| Heater Voltage (ac/dc) .....      | 12.6   | 6.3          | volts  |
| Heater Current .....              | 0.15   | 0.3          | ampere |
| Peak Heater-Cathode Voltage ..... |        | $\pm$ 90 max | volts  |


## Direct Interelectrode Capacitances:

|  |     |    |
|--|-----|----|
| Grid-Drive Operation:                        |     |    |
| Grid to Plate (Each unit) .....              | 1.5 | pF |
| Grid to Cathode and Heater (Each unit) ..... | 2.2 | pF |
| Plate to Cathode and Heater:                 |     |    |
| Unit No.1 .....                              | 0.5 | pF |
| Unit No.2 .....                              | 0.4 | pF |
| Cathode-Drive Operation:                     |     |    |
| Cathode to Plate (Each unit) .....           | 0.2 | pF |
| Cathode to Grid and Heater (Each unit) ..... | 4.6 | pF |
| Plate to Grid and Heater (Each unit) .....   | 1.8 | pF |
| Heater to Cathode (Each Unit) .....          | 2.4 | pF |

Class A<sub>1</sub> Amplifier (Each Unit)

## MAXIMUM AND MINIMUM RATINGS (Design-Center Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 300 | volts |
| Grid Voltage, Negative-bias value ..... | 50  | volts |
| Plate Dissipation .....                 | 2.5 | watts |

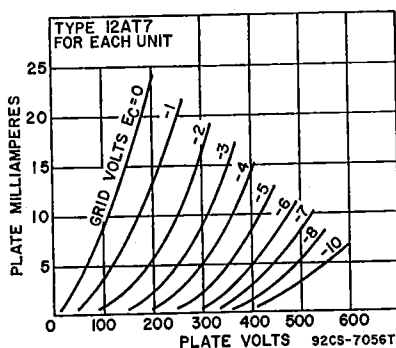

## CHARACTERISTICS

|  |       |       |            |
|--|-------|-------|------------|
| Plate Supply Voltage .....                                   | 100   | 250   | volts      |
| Cathode-Bias Resistor .....                                  | 270   | 200   | ohms       |
| Amplification Factor .....                                   | 60    | 60    |            |
| Plate Resistance (Approx.) .....                             | 15000 | 10900 | ohms       |
| Transconductance .....                                       | 4000  | 5500  | $\mu$ mhos |
| Grid Voltage (Approx.) for plate current of 10 $\mu$ A ..... | -5    | -12   | volts      |
| Plate Current .....  | 3.7   | 10    | mA         |

12AT7WA

Refer to chart at end of section.

12AT7WB

Refer to chart at end of section.

12AU6

Refer to type 6AU6A.

12AU7


Refer to chart at end of section.

12AU7A  
12AU7A/  
ECC82

7AU7, 9AU7

## MEDIUM-MU TWIN TRIODE

Miniature types used as phase inverters or push-pull amplifiers in ac/dc radio equipment and as multi-vibrators or oscillators in industrial control devices. Also used as combined vertical oscillators and vertical-deflection amplifiers, and as horizontal-deflection oscillators, in color and black-and-white television receivers. Outlines section, 6B; require miniature 9-contact socket. Each triode unit is independent of the other except for the common heater. For typical opera-



9A

tion as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section. Types 7AU7 and 9AU7 are identical with type 12AU7 and 12AU7A/ECC82 except for heater ratings.

|   | 7AU7      | 9AU7     | 12AU7A/<br>12AU7A/<br>ECC82 |         |
|---|-----------|----------|-----------------------------|---------|
| Heater Voltage(ac/dc):                        |           |          |                             |         |
| Series .....                                  | 7         | 9.4      | 12.6                        | volts   |
| Parallel .....                                | 3.5       | 4.7      | 6.3                         | volts   |
| Heater Current:                               |           |          |                             |         |
| Series .....                                  | 0.3       | 0.225    | 0.15                        | ampere  |
| Parallel .....                                | 0.6       | 0.45     | 0.3                         | ampere  |
| Heater Warm-up Time (Parallel, Average) ..    | 11        | 11       | —                           | seconds |
| Heater-Cathode Voltage:                       |           |          |                             |         |
| Peak value .....                              | ±200 max  | ±200 max | ±200 max                    | volts   |
| Average value .....                           | 100 max   | 100 max  | 100 max                     | volts   |
| Direct Interelectrode Capacitances (Approx.): | Unit No.1 |          | Unit No.2                   |         |
| Grid to Plate .....                           | 1.5       | 1.5      |                             | pF      |
| Grid to Cathode and Heater .....              | 1.6       | 1.6      |                             | pF      |
| Plate to Cathode and Heater .....             | 0.5       | 0.35     |                             | pF      |

**Class A<sub>1</sub> Amplifier (Each Unit Unless Otherwise Specified)**

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |      |       |
|--|------|-------|
| Plate Voltage .....                      | 330  | volts |
| Cathode Current .....                    | 22   | mA    |
| Plate Dissipation:                       |      |       |
| Each Plate .....                         | 2.75 | watts |
| Both Plates (Both units operating) ..... | 5.5  | watts |

**CHARACTERISTICS**

|   |      |      |       |
|---|------|------|-------|
| Plate Voltage .....                                     | 100  | 250  | volts |
| Grid Voltage .....                                      | 0    | -8.5 | volts |
| Amplification Factor .....                              | 19.5 | 17   |       |
| Plate Resistance (Approx.) .....                        | 6250 | 7700 | ohms  |
| Transconductance .....                                  | 3100 | 2200 | μmhos |
| Plate Current .....                                     | 11.8 | 10.5 | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA ..... | —    | -24  | volts |

**MAXIMUM CIRCUIT VALUES**

|                                  |      |        |  |
|----------------------------------|------|--------|--|
| Grid-Circuit Resistance:         |      |        |  |
| For fixed-bias operation .....   | 0.25 | megohm |  |
| For cathode-bias operation ..... | 1    | megohm |  |

**Oscillator (Each Unit Unless Otherwise Specified)**

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Maximum Values)  | Vertical-Deflection Oscillator | Horizontal-Deflection Oscillator |       |
|--|--------------------------------|----------------------------------|-------|
| DC Plate Voltage .....                   | 330                            | 330                              | volts |
| Peak Negative-Pulse Grid Voltage .....   | 440                            | 660                              | volts |
| Peak Cathode Current .....               | 66                             | 330                              | mA    |
| Average Cathode Current .....            | 22                             | 22                               | mA    |
| Plate Dissipation:                       |                                |                                  |       |
| Each Plate .....                         | 2.75                           | 2.75                             | watts |
| Both Plates (Both units operating) ..... | 5.5                            | 5.5                              | watts |

**MAXIMUM CIRCUIT VALUES**

|                               |     |     |         |
|-------------------------------|-----|-----|---------|
| Grid-Circuit Resistance ..... | 2.2 | 2.2 | megohms |
|-------------------------------|-----|-----|---------|

**Vertical-Deflection Amplifier (Each Unit Unless Otherwise Specified)**

For operation in a 525-line, 30-frame system


**MAXIMUM RATINGS (Design-Maximum Values)**

|  |      |       |
|--|------|-------|
| DC Plate Voltage .....                   | 330  | volts |
| Peak Positive-Pulse Plate Voltage# ..... | 1200 | volts |
| Peak Negative-Pulse Grid Voltage .....   | 275  | volts |
| Peak Cathode Current .....               | 66   | mA    |
| Average Cathode Current .....            | 22   | mA    |
| Plate Dissipation:                       |      |       |
| Each Plate .....                         | 2.75 | volts |
| Both Plates (Both units operating) ..... | 5.5  | watts |

**MAXIMUM CIRCUIT VALUE**

|   |     |         |
|---|-----|---------|
| Grid-Circuit Resistance, for cathode-bias operation ..... | 2.2 | megohms |
|---|-----|---------|

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

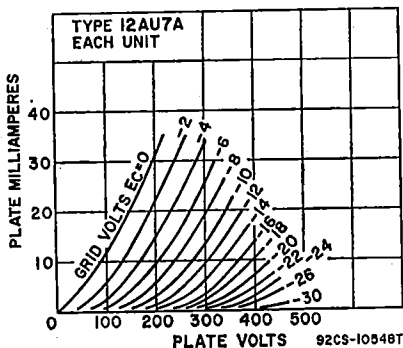**12AV5GA**

Refer to type 6AV5GA.

**12AV6**

Refer to type 6AV6.

**12AV7**

Refer to chart at end of section.

**12AW6**

Refer to chart at end of section.

**12AX3**

Refer to type 6AX3.

**12AX4GT**

Refer to chart at end of section.

**12AX4GTA****12AX4GTB**


Refer to type 6AX4GTB.

**12AX7**

Refer to chart at end of section.

# 12AX7A

## 12AX7A/ ECC83

**HIGH-MU TWIN TRIODE****9A**

Miniature types used as phase inverters or twin resistance-coupled amplifiers in radio equipment. Outlines section, 6B; require miniature 9-contact socket. Each triode unit is independent of the other except for common heater. For characteristics and curves, refer to type 6AV6. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section.

|   |           |               |        |
|---|-----------|---------------|--------|
| Heater Arrangement:                           | Series    | Parallel      |        |
| Heater Voltage (ac/dc) .....                  | 12.6      | 6.3           | volts  |
| Heater Current .....                          | 0.15      | 0.3           | ampere |
| Heater-Cathode-Voltage:                       |           |               |        |
| Peak value .....                              |           | $\pm 200$ max | volts  |
| Average value .....                           |           | 100 max       | volts  |
| Direct Interelectrode Capacitances (Approx.): | Unit No.1 | Unit No.2     |        |
| Grid to Plate .....                           | 1.7       | 1.7           | pF     |
| Grid to Cathode .....                         | 1.6       | 1.6           | pF     |
| Plate to Cathode and Heater .....             | 0.46      | 0.34          | pF     |

**Class A<sub>1</sub> Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                           |     |       |
|---------------------------|-----|-------|
| Plate Voltage .....       | 330 | volts |
| Grid Voltage:             |     |       |
| Negative-bias value ..... | 55  | volts |
| Positive-bias value ..... | 0   | volts |
| Plate Dissipation .....   | 1.2 | watts |

**EQUIVALENT-NOISE AND HUM VOLTAGE (References To Grid, Each Unit)\***

|                     |     |        |
|---------------------|-----|--------|
| Average Value ..... | 1.8 | μV rms |
|---------------------|-----|--------|

\* Measured in "true rms" units under the following conditions: Heater voltage (parallel connection), 6.3 volts ac; center tap of heater transformer grounded; plate supply voltage, 250 volts dc; plate load resistor, 100000 ohms; cathode resistor, 2700 ohms bypassed by 100-μF capacitor; grid resistor, 0 ohms; and amplifier covering frequency range between 25 and 10000 Hz.

Refer to chart at end of section.


**12AY3**

Refer to type 6AY3B.

**12AY3A**

**MEDIUM-MU TWIN TRIODE**

**12AY7**



**9A**

Miniature type used in the first stages of high-gain audio-frequency amplifiers. Outlines section, 6B; requires miniature 9-contact socket. Each triode unit is independent of the other except for the common heater. Use of the 12.6-volt connection with an ac heater supply is not recommended for applications involving low hum. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section.

|   |        |          |        |
|---|--------|----------|--------|
| Heater Arrangement:                                     | Series | Parallel |        |
| Heater Voltage (ac/dc) .....                            | 12.6   | 6.3      | volts  |
| Heater Current .....                                    | 0.15   | 0.3      | ampere |
| Peak Heater-Cathode Voltage .....                       |        | ±90 max  | volts  |
| Direct Interelectrode Capacitances (Approx., Each Unit) |        |          |        |
| Grid to Plate .....                                     |        | 1.3      | pF     |
| Grid to Cathode and Heater .....                        |        | 1.3      | pF     |
| Plate to Cathode and Heater .....                       |        | 0.6      | pF     |

**Class A<sub>1</sub> Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Center Values)**

|                           |     |       |
|---------------------------|-----|-------|
| Plate Voltage .....       | 300 | volts |
| Grid Voltage:             |     |       |
| Negative-bias value ..... | 50  | volts |
| Positive-bias value ..... | 0   | volts |
| Cathode Current .....     | 10  | mA    |
| Plate Dissipation .....   | 1.5 | watts |

**CHARACTERISTICS**


|   |       |       |
|---|-------|-------|
| Plate Voltage .....                                     | 250   | volts |
| Grid Voltage .....                                      | -4    | volts |
| Amplification Factor .....                              | 40    |       |
| Plate Resistance .....                                  | 22800 | ohms  |
| Transconductance .....                                  | 1750  | μmhos |
| Plate Current .....                                     | 3     | mA    |
| Grid Voltage (Approx.) for plate current of 10 mA ..... | -11   | volts |

Refer to chart at end of section.

**12AZ7**

**HIGH-MU TWIN TRIODE**

**12AZ7A**



**9A**

Miniature type used in direct-coupled cathode-drive rf amplifier circuits of vhf color and black-and-white television tuners. Outlines section, 6B; requires miniature 9-contact socket. For characteristics as class A<sub>1</sub> amplifier, refer to miniature type 12AT7.

|  |            |                       |         |
|--|------------|-----------------------|---------|
| Heater Voltage (ac/dc):                      |            |                       |         |
| Series .....                                 | 12.6       |                       | volts   |
| Parallel .....                               | 6.3        |                       | volts   |
| Heater Current:                              |            |                       |         |
| Series .....                                 | 0.225      |                       | ampere  |
| Parallel .....                               | 0.45       |                       | ampere  |
| Heater Warm-up Time (Average) .....          | 11         |                       | seconds |
| Heater-Cathode Voltage:                      |            |                       |         |
| Peak value .....                             | ±200 max   |                       | volts   |
| Average value .....                          | 100 max    |                       | volts   |
| Direct Interelectrode Capacitance (Approx.): | Unshielded | Shielded <sup>a</sup> |         |
| Grid to Plate (Each unit) .....              | 2          | 1.9                   | pF      |
| Grid to Cathode and Heater (Each unit) ..... | 2.6        | 2.8                   | pF      |
| Plate to Cathode and Heater:                 |            |                       |         |
| Unit No.1 .....                              | 0.44       | 1.4                   | pF      |
| Unit No.2 .....                              | 0.36       | 1.6                   | pF      |

<sup>a</sup> With external shield connected to cathode of unit under test.

### Class A<sub>1</sub> Amplifier (Each Unit)

|  |     |       |
|--|-----|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b> |     |       |
| Plate Voltage .....                            | 330 | volts |
| Grid Voltage, Negative-bias value .....        | 55  | volts |
| Plate Dissipation .....                        | 2.5 | watts |


### MAXIMUM CIRCUIT VALUES (Each Unit)

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-Circuit Resistance:         |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 1    | megohm |

# 12B4A

## LOW-MU TRIODE

Miniature type used as vertical-deflection amplifier in television receivers. Outlines section, 6E; requires miniature 9-contact socket.



### 9AG

|                                     |               |                 |         |
|-------------------------------------|---------------|-----------------|---------|
|                                     | <b>Series</b> | <b>Parallel</b> |         |
| Heater Voltage .....                | 12.6          | 6.3             | volts   |
| Heater Current .....                | 0.3           | 0.6             | ampere  |
| Heater Warm-up Time .....           | —             | 11              | seconds |
| Heater-Cathode Voltage:             |               |                 |         |
| Peak value .....                    |               | ±200 max        | volts   |
| Average value .....                 |               | 100 max         | volts   |
| Direct Interelectrode Capacitances: |               |                 |         |
| Grid to Plate .....                 |               | 4.8             | pF      |
| Grid to Cathode and Heater .....    |               | 5               | pF      |
| Plate to Cathode and Heater .....   |               | 1.5             | pF      |

### Class A<sub>1</sub> Amplifier

|   |     |       |
|---|-----|-------|
| <b>MAXIMUM RATINGS (Design-Center Values)</b> |     |       |
| Plate Voltage .....                           | 550 | volts |
| Grid Voltage, Negative-bias value .....       | 50  | volts |
| Plate Dissipation .....                       | 5.5 | watts |

### CHARACTERISTICS

|  |       |       |
|--|-------|-------|
| Plate Voltage .....                                      | 150   | volts |
| Grid Voltage .....                                       | —17.5 | volts |
| Amplification Factor .....                               | 6.5   |       |
| Plate Resistance (Approx.) .....                         | 1030  | ohms  |
| Transconductance .....                                   | 6300  | μmhos |
| Plate Current .....                                      | 34    | mA    |
| Plate Current for grid voltage of —23 volts .....        | 9.6   | mA    |
| Grid Voltage (Approx.) for plate current of 200 μA ..... | —32   | volts |

### MAXIMUM CIRCUIT VALUES

|                                  |      |         |
|----------------------------------|------|---------|
| Grid-Circuit Resistance:         |      |         |
| For fixed-bias operation .....   | 0.47 | megohm  |
| For cathode-bias operation ..... | 2.2  | megohms |

### Vertical-Deflection Amplifier

For operation in a 525-line, 30-frame system

|   |       |       |
|---|-------|-------|
| <b>MAXIMUM RATINGS (Design-Center Values)</b>                           |       |       |
| DC Plate Voltage .....  | 550   | volts |
| Peak Positive-Pulse Plate Voltage <sup>#</sup> (Absolute Maximum) ..... | 1000† | volts |

|  |     |       |
|--|-----|-------|
| Peak Negative-Pulse Grid Voltage ..... | 250 | volts |
| Peak Cathode Current .....             | 105 | mA    |
| Average Cathode Current .....          | 30  | mA    |
| Plate Dissipation .....                | 5.5 | watts |


**MAXIMUM CIRCUIT VALUE**

|   |     |         |
|---|-----|---------|
| Grid-Circuit Resistance, for cathode-bias operation ..... | 2.2 | megohms |
|---|-----|---------|

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

† Under no circumstances should this absolute value be exceeded.

|                                   |               |
|-----------------------------------|---------------|
| Refer to chart at end of section. | <b>12B8GT</b> |
| Refer to type 6BA6.               | <b>12BA6</b>  |
| Refer to chart at end of section. | <b>12BA7</b>  |
| Refer to chart at end of section. | <b>12BD6</b>  |
| Refer to type 6BE3.               | <b>12BE3</b>  |
| Refer to type 6BE6.               | <b>12BE6</b>  |
| Refer to chart at end of section. | <b>12BF6</b>  |
| Refer to type 6BF11.              | <b>12BF11</b> |
| Refer to chart at end of section. | <b>12BH7</b>  |



**9A**

**MEDIUM-MU TWIN TRIODE**

**12BH7A**

Miniature type used as combined vertical-deflection amplifier and vertical oscillator, and as horizontal-deflection oscillator, in television receivers, and in phase-inverter and multivibrator circuits. Outlines section, 6E; requires miniature 9-contact socket. Each triode unit is independent of the other except for the common heater.

|  |           |           |         |
|--|-----------|-----------|---------|
| Heater Arrangement:                            | Series    | Parallel  |         |
| Heater Voltage (ac/dc) .....                   | 12.6      | 6.3       | volts   |
| Heater Current .....                           | 0.3       | 0.6       | ampere  |
| Heater Warm-up Time (Average) .....            | —         | 11        | seconds |
| Heater-Cathode Voltage:                        |           |           |         |
| Peak value .....                               |           | ±200 max  | volts   |
| Average value .....                            |           | 100 max   | volts   |
| Direct Interelectrode Capacitances (Approx.):  | Unit No.1 | Unit No.2 |         |
| Grid to Plate .....                            | 2.6       | 2.6       | pF      |
| Grid to Cathode and Heater .....               | 3.2       | 3.2       | pF      |
| Plate to Cathode and Heater .....              | 0.5       | 0.4       | pF      |
| Plate of Unit No.1 to Plate of Unit No.2 ..... |           | 0.8       | pF      |

**Class A<sub>1</sub> Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Center Values)**

|  |     |       |
|--|-----|-------|
| Plate Voltage .....                      | 300 | volts |
| Grid Voltage:                            |     |       |
| Negative-bias value .....                | 50  | volts |
| Positive-bias value .....                | 0   | volts |
| Cathode Current .....                    | 20  | mA    |
| Plate Dissipation:                       |     |       |
| Each Plate .....                         | 3.5 | watts |
| Both plates (Both units operating) ..... | 7   | watts |

**CHARACTERISTICS**

|   |       |       |
|---|-------|-------|
| Plate Voltage .....                                     | 250   | volts |
| Grid Voltage .....                                      | —10.5 | volts |
| Amplification Factor .....                              | 16.5  |       |
| Plate Resistance (Approx.) .....                        | 5300  | ohms  |
| Transconductance .....                                  | 3100  | μmhos |
| Plate Current .....                                     | 11.5  | mA    |
| Plate Current for grid voltage of —14 volts .....       | 4     | mA    |
| Grid Voltage (Approx.) for plate current of 50 μA ..... | —23   | volts |

**MAXIMUM CIRCUIT VALUES**

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-Circuit Resistance:         |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 1    | megohm |

**Oscillator (Each Unit)**

For operation in a 525-line, 30-frame system


| MAXIMUM RATINGS (Design-Center Values)   | Vertical-Deflection Oscillator | Horizontal-Deflection Oscillator |         |
|--|--------------------------------|----------------------------------|---------|
| DC Plate Voltage .....                   | 450                            | 450                              | volts   |
| Peak Negative-Pulse Grid Voltage .....   | 400                            | 600                              | volts   |
| Peak Cathode Current .....               | 70                             | 300                              | mA      |
| Average Cathode Current .....            | 20                             | 20                               | mA      |
| Plate Dissipation:                       |                                |                                  |         |
| Each Plate .....                         | 3.5                            | 3.5                              | watts   |
| Both Plates (Both units operating) ..... | 7                              | 7                                | watts   |
| <b>MAXIMUM CIRCUIT VALUES</b>            |                                |                                  |         |
| Grid-Circuit Resistance .....            | 2.2                            | 2.2                              | megohms |

**Vertical-Deflection Amplifier (Each Unit)**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Center Values)**

|   |       |       |
|---|-------|-------|
| DC Plate Voltage .....                                      | 450   | volts |
| Peak Positive-Pulse Plate Voltage# (Absolute maximum) ..... | 1500* | volts |
| Peak Negative-Pulse Grid Voltage .....                      | 250   | volts |
| Peak Cathode Current .....                                  | 70    | mA    |
| Average Cathode Current .....                               | 20    | mA    |
| Plate Dissipation:  |       |       |
| Each Plate .....  | 3.5   | watts |
| Both Plates (Both units operating) .....                    | 7     | watts |

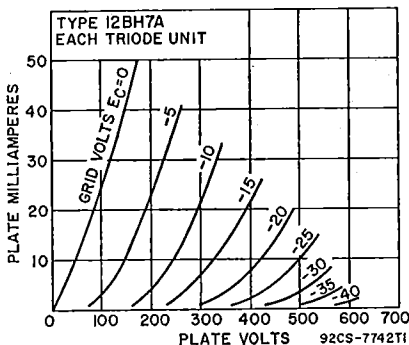**MAXIMUM CIRCUIT VALUE**

|  |     |         |
|--|-----|---------|
| Grid-Circuit Resistance for cathode-bias operation ..... | 2.2 | megohms |
|--|-----|---------|

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

\* Under no circumstances should this absolute value be exceeded.

**12BK5**

Refer to chart at end of section.

**12BL6**

Refer to chart at end of section.

**12BN6**

Refer to chart at end of section.

**12BQ6GTB/12CU6**

Refer to type 6BQ6GTB/6CU6.

**12BR3**

For replacement use type 12AF3/12BR3/12RK19.

**12BR7**

Refer to chart at end of section.

**12BS3**

Refer to chart at end of section.



Refer to type 6BS3A.

Refer to chart at end of section.

Refer to chart at end of section.

For replacement use type 12BY7A/12BV7/12DQ7.

Refer to type 6BV11.


Refer to chart at end of section.

Refer to chart at end of section.

- 12BS3A
- 12BS3A/12DW4A
- 12BT3
- 12BV7
- 12BV11
- 12BW4
- 12BY7

# 12BY7A 12BY7A/ 12BV7/ 12DQ7

## SHARP-CUTOFF PENTODE



9BF


Miniature types used as video amplifier in television receivers. Outlines section, 6E; require miniature 9-contact socket.

|  |        |          |         |
|--|--------|----------|---------|
| Heater Arrangement:  | Series | Parallel |         |
| Heater Voltage (ac/dc)   | 12.6   | 6.3      | volts   |
| Heater Current   | 0.3    | 0.6      | ampere  |
| Heater Warm-up Time (Average)  | —      | 11       | seconds |
| Heater-Cathode Voltage:  |        |          |         |
| Peak value   |        | ±200 max | volts   |
| Average value  |        | 100 max  | volts   |
| Direct Interelectrode Capacitances:  |        |          |         |
| Grid No.1 to Plate   |        | 0.063    | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3,<br>and Internal Shield |        | 10.2     | pF      |
| Plate to Cathode, Heater, Grid No.2, and Internal Shield                   |        | 3.5      | pF      |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |     |       |
|---|-----|-------|
| Plate Supply Voltage                                | 330 | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive value | 0   | volts |
| Grid-No.2 (Screen-Grid) Voltage                     | 190 | volts |
| Grid-No.1 (Control-Grid) Voltage                    |     |       |
| Negative-bias value                                 | 55  | volts |
| Positive-bias value                                 | 0   | volts |
| Plate Dissipation                                   | 6.5 | watts |
| Grid-No.2 Input                                     | 1.2 | watts |

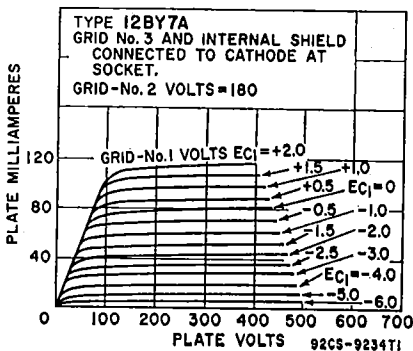

**CHARACTERISTICS**

|   |                                |            |
|---|--------------------------------|------------|
| Plate Supply Voltage .....  | 250                            | volts      |
| Grid No.3 .....   | Connected to cathode at socket |            |
| Grid-No.2 Supply Voltage .....                                    | 180                            | volts      |
| Cathode-Bias Resistor .....                                       | 100                            | ohms       |
| Plate Resistance (Approx.) .....                                  | 93000                          | ohms       |
| Transconductance .....  | 11000                          | $\mu$ mhos |
| Plate Current .....   | 26                             | mA         |
| Grid-No.2 Current .....   | 5.75                           | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 20 $\mu$ A ..... | -11.0                          | volts      |

**MAXIMUM CIRCUIT VALUES**

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 1    | megohm |

**12BZ6**

Refer to type 6BZ6.

**12BZ7**

Refer to chart at end of section.

**12C5**

Refer to type 6CU5.

**12C8**

Refer to chart at end of section.

**12CA5**

Refer to type 6CA5.

**12CK3**

Refer to chart at end of section.

**12CL3**

Refer to type 6CL3.

**12CN5**

Refer to chart at end of section.

**12CR6**

Refer to chart at end of section.


**12CS6**

Refer to type 6CS6.

**12CT3****HALF-WAVE  
VACUUM RECTIFIER**

17CT3, 25CT3

Miniature type used as damper tube in horizontal-deflection circuits of black-and-white and small-screen color television receivers. Outlines section, 6H; requires miniature 9-contact socket. Socket terminals 1, 3, 7, and 8 should not be used as tie points for external-circuit components. This tube, like other power-handling tubes, should be adequately ventilated. Types 17CT3 and 25CT3 are identical with type 12CT3 except for heater ratings.

**9RX**

|   |       |       |       |         |
|---|-------|-------|-------|---------|
| Heater Voltage (ac/dc) .....                  | 12CT3 | 17CT3 | 25CT3 | volts   |
| Heater Current .....                          | 0.6   | 0.45  | 0.3   | amperes |
| Heater Warm-up Time (Average) .....           | 11    | 11    | 11    | seconds |
| Direct Interelectrode Capacitances (Approx.): |       |       |       |         |
| Plate to Cathode and Heater .....             |       |       | 12    | pF      |
| Cathode to Plate and Heater .....             |       |       | 9.5   | pF      |
| Heater to Cathode .....                       |       |       | 2.8   | pF      |

**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |              |       |
|---|------|--------------|-------|
| Peak Inverse Plate Voltage# .....         | 5000 | volts        |       |
| Peak Plate Current .....                  | 1200 | mA           |       |
| Average Plate Current .....               | 250  | mA           |       |
| Plate Dissipation .....                   | 4.75 | watts        |       |
| Heater-Cathode Voltage:                   |      |              |       |
| Peak value .....                          | +300 | -5000        | volts |
| Average value .....                       | +100 | -300         | volts |
| Bulb Temperature (At hottest point) ..... | 220  | $^{\circ}$ C |       |

**CHARACTERISTICS, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 350 mA ..... | 16 | volts |
|---|----|-------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

|  |                   |
|--|-------------------|
| Refer to chart at end of section.            | <b>12CT8</b>      |
| Refer to type 6CU5.                          | <b>12CU5/12C5</b> |
| For replacement use type 12BQ6GTB/12CU6.     | <b>12CU6</b>      |
| Refer to chart at end of section.            | <b>12CX6</b>      |
| Refer to chart at end of section.            | <b>12D4</b>       |
| Refer to chart at end of section.            | <b>12DB5</b>      |
| Refer to chart at end of section.            | <b>12DE8</b>      |
| Refer to type 6DK6.                          | <b>12DK6</b>      |
| Refer to chart at end of section.            | <b>12DK7</b>      |
| Refer to chart at end of section.            | <b>12DL8</b>      |
| Refer to chart at end of section.            | <b>12DM4</b>      |
|  | <b>12DM4A</b>     |
| Refer to chart at end of section.            | <b>12DQ6A</b>     |
| Refer to chart at end of section.            | <b>12DQ6B</b>     |
| For replacement use type 12GW6/12DQ6B.       | <b>12DQ6B</b>     |
| Refer to chart at end of section.            | <b>12DQ7</b>      |
| For replacement use type 12BY7A/12BV7/12DQ7. | <b>12DQ7</b>      |
| Refer to chart at end of section.            | <b>12DS7</b>      |
|  | <b>12DS7A</b>     |
| Refer to type 6DT5.                          | <b>12DT5</b>      |
| Refer to type 6DT8.                          | <b>12DT8</b>      |
| Refer to chart at end of section.            | <b>12DU7</b>      |
| Refer to chart at end of section.            | <b>12DV8</b>      |
| Refer to chart at end of section.            | <b>12DW4A</b>     |
| For replacement use type 12BS3A/12DW4A.      | <b>12DW4A</b>     |
| Refer to chart at end of section.            | <b>12DW7</b>      |
| Refer to chart at end of section.            | <b>12DY8</b>      |
| Refer to chart at end of section.            | <b>12DZ6</b>      |
| Refer to chart at end of section.            | <b>12EA6</b>      |
| Refer to chart at end of section.            | <b>12EC8</b>      |
| Refer to chart at end of section.            | <b>12ED5</b>      |
| Refer to chart at end of section.            | <b>12EG6</b>      |
| Refer to chart at end of section.            | <b>12EH5</b>      |
| Refer to chart at end of section.            | <b>12EK6</b>      |
| Refer to chart at end of section.            | <b>12EL6</b>      |
| Refer to chart at end of section.            | <b>12EM6</b>      |
| Refer to chart at end of section.            | <b>12EN6</b>      |
| Refer to chart at end of section.            | <b>12EQ7</b>      |
| Refer to chart at end of section.            | <b>12F5GT</b>     |
| Refer to chart at end of section.            | <b>12F8</b>       |

**12FK6**

Refer to chart at end of section.

**12FM6**

Refer to chart at end of section.

**12FQ7**

Refer to type 6FQ7/6CG7.

**12FQ8**

Refer to chart at end of section.

**12FR8**


Refer to chart at end of section.

**12FV7**

Refer to chart at end of section.

**12FX5****POWER PENTODE****19FX5, 60FX5**

Miniature type used in output stages of audio amplifiers. Outlines section, 5D; requires miniature 7-contact socket. Types 19FX5 and 60FX5 are identical with type 12FX5 except for heater ratings.




|  | 12FX5    | 19FX5    | 60FX5    |         |
|--|----------|----------|----------|---------|
| Heater Voltage (ac/dc)                                 | 12.6     | 18.9     | 60       | volts   |
| Heater Current   | 0.45     | 0.3      | 0.1      | ampere  |
| Heater Warm-up Time (Average)                          | 11       | 11       | —        | seconds |
| Heater-Cathode Voltage:                                |          |          |          |         |
| Peak value   | ±200 max | ±200 max | ±200 max | volts   |
| Average value  | 100 max  | 100 max  | 100 max  | volts   |
| Direct Interelectrode Capacitances (Approx.):          |          |          |          |         |
| Grid No.1 to Plate                                     |          |          | 0.65     | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 |          |          | 17       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     |          |          | 9        | pF      |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|                                     |     |       |
|-------------------------------------|-----|-------|
| Plate Voltage                       | 150 | volts |
| Grid-No.2 (Screen-Grid) Voltage     | 130 | volts |
| Plate Dissipation                   | 5.5 | watts |
| Grid-No.2 Input                     | 2   | watts |
| Bulb Temperature (At hottest point) | 225 | °C    |


**TYPICAL OPERATION**

|                                  |       |       |
|----------------------------------|-------|-------|
| Plate Supply Voltage             | 110   | volts |
| Grid-No.2 Supply Voltage         | 115   | volts |
| Cathode-Bias Resistor            | 62    | ohms  |
| Peak AF Grid-No.1 Voltage        | 3     | volts |
| Zero-Signal Plate Current        | 36    | mA    |
| Maximum-Signal Plate Current     | 35    | mA    |
| Zero-Signal Grid No.2 Current    | 10    | mA    |
| Maximum-Signal Grid No.2 Current | 12    | mA    |
| Plate Resistance                 | 17500 | ohms  |
| Transconductance                 | 13500 | μmhos |
| Load Resistance                  | 3000  | ohms  |

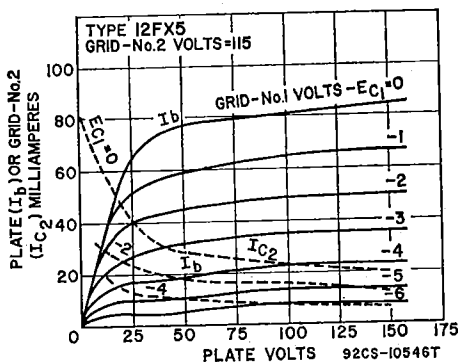

|                                   |     |          |
|-----------------------------------|-----|----------|
| Total Harmonic Distortion .....   | 8   | per cent |
| Maximum-Signal Power Output ..... | 1.3 | watts    |
| <b>MAXIMUM CIRCUIT VALUES</b>     |     |          |
| Grid-No.1-Circuit Resistance:     |     |          |
| For fixed-bias operation .....    | 0.1 | megohm   |
| For cathode-bias operation .....  | 0.5 | megohm   |

|  |  |
|--|--|
| Refer to chart at end of section.        | <b>12FX8</b><br><b>12FX8A</b>                  |
| Refer to chart at end of section.        | <b>12GA6</b>                                   |
| For replacement use type 12BQ6GTB/12CU6. | <b>12GB3</b>                                   |
| For replacement use type 12GW6/12DQ6B.   | <b>12GB6</b><br><b>12GB7</b>                   |
| Refer to chart at end of section.        | <b>12GC6</b>                                   |
| Refer to type 6GE5.                      | <b>12GE5</b>                                   |
| Refer to chart at end of section.        | <b>12GJ5</b>                                   |
| Refer to type 6GJ5A.                     | <b>12GJ5A</b>                                  |
| Refer to chart at end of section.        | <b>12GN7</b>                                   |
| Refer to chart at end of section.        | <b>12GN7A</b>                                  |
| For replacement use type 12HG7/12GN7A.   | <b>12GT5</b><br><b>12GT5A</b>                  |
| Refer to chart at end of section.        | <b>12GW6/12DQ6B</b>                            |
| Refer to type 6GW6/6DQ6B.                | <b>12H6</b>                                    |
| Refer to chart at end of section.        | <b>12HE7</b>                                   |
| Refer to type 38HE7.                     | <b>12HG7</b><br><b>12HG7/</b><br><b>12GN7A</b> |



9BF

**SHARP-CUTOFF PENTODE**

Miniature types with frame grid used as video amplifier in color and black-and-white television receivers. Outlines section, 6E; require 9-contact miniature socket.

|                              |        |          |        |
|------------------------------|--------|----------|--------|
| Heater Arrangement:          | Series | Parallel |        |
| Heater Voltage (ac/dc) ..... | 12.6   | 6.3      | volts  |
| Heater Current .....         | 0.26   | 0.52     | ampere |

|   |               |       |
|---|---------------|-------|
| <b>Heater-Cathode Voltage:</b>  |               |       |
| Peak value .....  | $\pm 200$ max | volts |
| Average value .....   | 100 max       | volts |
| <b>Direct Interelectrode Capacitances:</b>                                    |               |       |
| Grid No.1 to Plate .....  | 0.15 max      | pF    |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 14 max        | pF    |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     | 4.4 max       | pF    |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)


|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 400                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 10                 | watts |
| Grid-No.2 Input:  |                    |       |
| For Grid-No.2 voltages up to 165 volts .....                | 1                  | watt  |
| For Grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

#### CHARACTERISTICS

|  |   |            |
|--|---|------------|
| Plate Supply Voltage .....   | 300   | volts      |
| Grid No.3 (Suppressor Grid) .....                                  | Connected to cathode at socket                | volts      |
| Grid-No.2 Supply Voltage .....                                     | 135   | volts      |
| Grid No.1 .....  | Connected to negative end of cathode resistor |            |
| Cathode Resistor .....   | 47  | ohms       |
| Plate Resistance (Approx.) .....                                   | 60000   | ohms       |
| Transconductance .....   | 32000   | $\mu$ mhos |
| Plate Current .....  | 31  | mA         |
| Grid-No.2 Current .....  | 4.8   | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | -4.5  | volts      |

#### MAXIMUM CIRCUIT VALUES


|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.1  | megohm |
| For cathode-bias operation ..... | 0.25 | megohm |

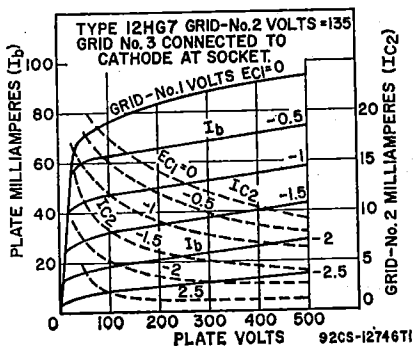

## 12HL7

### SHARP-CUTOFF PENTODE

Miniature type with frame grid used as a video output amplifier in color television receivers. Outlines section, 6E; requires miniature 9-contact socket.



9BF

|                          |        |          |        |
|--------------------------|--------|----------|--------|
| Heater Arrangement ..... | Series | Parallel |        |
| Heater Voltage .....     | 12.6   | 6.3      | volts  |
| Heater Current .....     | 0.3    | 0.6      | ampere |

|   |          |          |       |
|---|----------|----------|-------|
| Heater-Cathode Voltage:   |          |          |       |
| Peak value  | ±200 max | ±200 max | volts |
| Average value   | 100 max  | 100 max  | volts |
| Direct Interelectrode Capacitances:                                     |          |          |       |
| Grid No.1 to Plate  |          | 0.15     | pF    |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield |          | 15       | pF    |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     |          | 6        | pF    |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |                    |       |
|--|--------------------|-------|
| Plate Voltage  | 400                | volts |
| Grid-No.3 (Suppressor-Grid) Voltage, Positive-bias value | 0                  | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage                   | 330                | volts |
| Grid-No.2 Voltage  | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value    | 0                  | volt  |
| Plate Dissipation  | 10                 | watts |
| Grid-No.2 Input  | 1                  | watt  |

**CHARACTERISTICS**

|   |     |       |       |
|---|-----|-------|-------|
| Plate Supply Voltage                                    | 50  | 250   | volts |
| Grid-No.3 Voltage, Referred to negative end of cathode  | —   | 0     | volts |
| Grid-No.2 Voltage                                       | 125 | 150   | volts |
| Grid-No.1 Voltage                                       | 0   | 0     | volts |
| Cathode Resistor (Bypassed)                             | —   | 122   | ohms  |
| Plate Current   | 76  | 25    | mA    |
| Grid-No.2 Current                                       | 32  | 6     | mA    |
| Transconductance, Grid No.1 to Plate                    | —   | 21000 | μmhos |
| Plate Resistance (Approx.)                              | —   | 55000 | ohms  |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | —   | -7.2  | volts |

**MAXIMUM CIRCUIT VALUES**

|                               |      |        |
|-------------------------------|------|--------|
| Grid-No.1-Circuit Resistance: |      |        |
| For fixed-bias operation      | 0.1  | megohm |
| For cathode-bias operation    | 0.25 | megohm |

- Refer to chart at end of section. **12J5GT**
- Refer to chart at end of section. **12J7GT**
- Refer to chart at end of section. **12J8**
- Refer to chart at end of section. **12JB6**
- Refer to type 6JB6A. **12JB6A**
- Refer to type 6JN6. **12JN6**
- Refer to chart at end of section. **12JN8**
- Refer to type 6JQ6. **12JQ6**
- Refer to chart at end of section. **12JT6**
- Refer to type 6JT6A. **12JT6A**
- Refer to chart at end of section. **12K5**
- Refer to chart at end of section. **12K7GT**
- Refer to chart at end of section. **12K8**
- Refer to chart at end of section. **12KL8**
- Refer to chart at end of section. **12L6GT**
- Refer to type 6MD8. **12MD8**
- Refer to chart at end of section. **12Q7GT**
- Refer to chart at end of section. **12R5**

|             |   |
|-------------|---|
| 12RK19      | Refer to chart at end of section.<br>For replacement use type 12AF3/12BR3/12RK19. |
| 12S8GT      | Refer to chart at end of section.   |
| 12SA7       | Refer to chart at end of section.   |
| 12SA7GT     | Refer to chart at end of section.   |
| 12SC7       | Refer to chart at end of section.   |
| 12SF5       | Refer to chart at end of section.   |
| 12SF5GT     | Refer to chart at end of section.   |
| 12SF7       | Refer to chart at end of section.   |
| 12SG7       | Refer to chart at end of section.   |
| 12SH7       | Refer to chart at end of section.   |
| 12SJ7       | Refer to chart at end of section.   |
| 12SJ7GT     | Refer to chart at end of section.   |
| 12SK7       | Refer to chart at end of section.   |
| 12SK7GT     | Refer to chart at end of section.   |
| 12SL7GT     | Refer to type 6SL7GT.   |
| 12SN7GT     | Refer to chart at end of section.   |
| 12SN7GTA    | Refer to type 6SN7GTB.  |
| 12SQ7       | Refer to chart at end of section.   |
| 12SQ7GT     | Refer to chart at end of section.   |
| 12SR7       | Refer to chart at end of section.   |
| 12SR7GT     | Refer to chart at end of section.   |
| 12SW7       | Refer to chart at end of section.   |
| 12SY7       | Refer to chart at end of section.   |
| 12T10       | Refer to type 6T10.   |
| 12U7        | Refer to chart at end of section.   |
| 12V6GT      | Refer to type 6V6.  |
| 12W6GT      | Refer to type 6W6GT.  |
| 12X4        | Refer to type 6X4.  |
| 12Z3        | Refer to chart at end of section.   |
| 13CW4       | Refer to type 6CW4.   |
| 13DE7       | Refer to type 6DE7.   |
| 13DR7       | Refer to type 6DR7.   |
| 13EM7       | Refer to type 6EM7/6EA7.  |
| 13EM7/15EA7 | Refer to type 6EM7/6EA7.  |
| 13FD7       | Refer to type 6FD7.   |
| 13FM7       | Refer to type 6FM7.   |
| 13FM7/15FM7 | Refer to type 6FM7.   |
| 13GB5       | Refer to chart at end of section.   |
| 13GB5/XL500 | Refer to type 6GB5/EL500.   |
| 13GF7A      | Refer to type 6GF7A.  |



Refer to chart at end of section.  
For replacement use type 13Z10/13J10.


13J10

Refer to type 6JZ8.

13JZ8

**BEAM POWER TUBE—  
SHARP-CUTOFF PENTODE**

**13V10**



12EZ

Duodecar type used as combined FM detector and audio-frequency output amplifier in television receivers. The beam power unit is used in af output stages and the pentode unit as an FM detector. Outlines section, 8C; requires duodecar 12-contact socket. Heater: volts (ac/dc), 13.2; amperes, 0.45; average warm-up time, 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**Beam Power Unit as Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                       |     |       |
|---------------------------------------|-----|-------|
| Plate Voltage .....                   | 165 | volts |
| Grid-No.2 (Screen-Grid) Voltage ..... | 150 | volts |
| Cathode Current .....                 | 65  | mA    |
| Plate Dissipation .....               | 6.5 | watts |
| Grid-No.2 Input .....                 | 1.8 | watts |

**TYPICAL OPERATION**

|   |       |            |
|---|-------|------------|
| Plate Voltage .....                       | 145   | volts      |
| Grid-No.2 Voltage .....                   | 125   | volts      |
| Grid-No.1 (Control-Grid) Voltage .....    | —6    | volts      |
| Peak AF Grid-No.1 Voltage .....           | 6     | volts      |
| Zero-Signal Plate Current .....           | 34    | mA         |
| Maximum-Signal Plate Current .....        | 36    | mA         |
| Zero-Signal Grid-No.2 Current .....       | 2.2   | mA         |
| Maximum-Signal Grid-No.2 Current .....    | 5.5   | mA         |
| Plate Resistance (Approx.) .....          | 0.058 | megohm     |
| Transconductance .....                    | 6400  | $\mu$ mhos |
| Load Resistance .....                     | 3000  | ohms       |
| Total Harmonic Distortion (Approx.) ..... | 7     | per cent   |
| Maximum-Signal Power Output .....         | 1.5   | watts      |

**MAXIMUM CIRCUIT VALUES**

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 0.5  | megohm |

**Pentode Unit as Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|   |      |            |
|---|------|------------|
| Plate Supply Voltage .....  | 150  | volts      |
| Grid-No.3 (Suppressor-Grid) Voltage .....                         | 0    | volts      |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                      | 100  | volts      |
| Cathode-Bias Resistor .....                                       | 560  | ohms       |
| Plate Resistance (Approx.) .....                                  | 0.15 | megohm     |
| Transconductance, Grid No.1 to Plate .....                        | 1000 | $\mu$ mhos |
| Transconductance, Grid No.3 to Plate .....                        | 400  | $\mu$ mhos |
| Plate Current .....   | 1.3  | mA         |
| Grid-No.2 Current .....   | 2    | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 10 $\mu$ A ..... | —4.5 | volts      |
| Grid-No.3 Voltage (Approx.) for plate current of 10 $\mu$ A ..... | —4.5 | volts      |

**Pentode Unit as FM Detector**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |                    |       |
|---|--------------------|-------|
| Plate Voltage .....   | 330                | volts |
| Grid-No.3 Voltage .....                                     | 28                 | volts |
| Grid-No.2 Supply Voltage .....                              | 330                | volts |
| Grid-No.2 Voltage .....                                     | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                  | volts |
| Plate Dissipation .....                                     | 1.7                | watts |
| Grid-No.2 Input:  |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | 1.1                | watts |
| For grid-No.2 voltages between 165 and 330 volts .....      | See curve page 300 |       |

Refer to chart at end of section.

13Z10


Refer to type 6Z10/6J10.

13Z10/13J10

|              |                                   |
|--------------|-----------------------------------|
| <b>14A4</b>  | Refer to chart at end of section. |
| <b>14A5</b>  | Refer to chart at end of section. |
| <b>14A7</b>  | Refer to chart at end of section. |
| <b>14AF7</b> | Refer to chart at end of section. |
| <b>14B6</b>  | Refer to chart at end of section. |
| <b>14B8</b>  | Refer to chart at end of section. |

**14BL11****DUAL TRIODE—  
SHARP-CUTOFF PENTODE**


Duodecar type used in television receiver applications. The pentode unit is used for video amplifier service, and the triode units for general-purpose use. **Outlines section, 8B**; requires duodecar 12-contact socket. **Heater:** volts (ac/dc), 14.2; amperes, 0.45; average warm-up time 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**12GC****Class A<sub>1</sub> Amplifier**

|  | Triode<br>Unit No.1 | Triode<br>Unit No.2 | Pentode<br>Unit |       |            |
|--|---------------------|---------------------|-----------------|-------|------------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>                     | 330                 | 330                 | 250             | 250   | volts      |
| Plate Voltage .....  | —                   | —                   | 125             | 125   | volts      |
| Grid-No.2 (Screen-Grid) Voltage .....                              | —                   | —                   | —               | —     | volts      |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value .....        | 0                   | 0                   | 0               | 0     | volts      |
| Plate Dissipation .....  | 1.5                 | 2                   | 2.5             | 2.5   | watts      |
| Grid-No.2 Input .....  | —                   | —                   | 1.25            | 1.25  | watts      |
| <b>CHARACTERISTICS</b>   |                     |                     |                 |       |            |
| Plate Voltage .....  | 200                 | 200                 | 35              | 200   | volts      |
| Grid-No.2 Voltage .....  | —                   | —                   | 100             | 100   | volts      |
| Grid-No.1 Voltage .....  | —                   | —                   | 0               | —     | volts      |
| Cathode-Bias Resistor .....  | 470                 | 270                 | —               | 82    | ohms       |
| Amplification Factor .....   | 40                  | 69                  | —               | —     | —          |
| Plate Resistance (Approx.) .....                                   | 7600                | 12500               | —               | 70000 | ohms       |
| Transconductance .....   | 5300                | 5500                | —               | 19000 | $\mu$ mhos |
| Plate Current .....  | 7.2                 | 7.1                 | 40              | 16    | mA         |
| Grid-No.2 Current .....  | —                   | —                   | 13              | 3     | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 100 $\mu$ A ..... | -8                  | -5.5                | —               | -5.5  | volts      |
| <b>MAXIMUM CIRCUIT VALUES</b>                                      |                     |                     |                 |       |            |
| Grid-No.1-Circuit Resistance .....                                 | 0.5                 | 0.5                 | 0.1             | 0.1   | megohm     |
| For fixed-bias operation .....                                     | 1                   | 1                   | 0.25            | 0.25  | megohm     |
| For cathode-bias operation .....                                   | —                   | —                   | —               | —     | —          |

**14BR11****DUAL TRIODE—  
SHARP-CUTOFF PENTODE**

Duodecar type used in television receiver applications. The high- $\mu$  triode unit No. 1 is used for general-purpose use, the medium- $\mu$  triode unit No. 2 for sync separator service, and the pentode unit for video amplifier service. **Outlines section, 8C**; requires duodecar 12-contact socket. **Heater:** volts (ac/dc), 14.2; amperes, 0.45; warm-up time, 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**12GL**

Class A<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Maximum Values)

|   | Triode<br>Unit No.1 | Triode<br>Unit No.2 | Pentode<br>Unit    |       |
|---|---------------------|---------------------|--------------------|-------|
| Plate Voltage .....   | 330                 | 330                 | 330                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —                   | —                   | 330                | volts |
| Grid-No.2 Voltage .....                                     | —                   | —                   | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0                   | 0                   | 0                  | volts |
| Plate Dissipation .....                                     | 1.5                 | 2                   | 4                  | watts |
| Grid-No.2 Input:  |                     |                     |                    |       |
| For grid-No.2 voltages up to 165 volts .....                | —                   | —                   | 1.1                | watts |
| For grid-No.2 voltages between 165 and 330 volts .....      | —                   | —                   | See curve page 300 |       |

CHARACTERISTICS

|   |       |      |     |       |       |
|---|-------|------|-----|-------|-------|
| Plate Voltage .....   | 200   | 200  | 35  | 135   | volts |
| Grid-No.2 Voltage .....                                       | —     | —    | 185 | 135   | volts |
| Grid-No.1 Voltage .....                                       | -2    | —    | 0   | —     | volts |
| Cathode-Bias Resistor .....                                   | —     | 220  | —   | 100   | ohms  |
| Amplification Factor .....                                    | 68    | 41   | —   | —     |       |
| Plate-Resistance (Approx.) .....                              | 12400 | 9400 | —   | 45000 | ohms  |
| Transconductance .....  | 5500  | 4400 | —   | 10400 | μmhos |
| Plate Current .....   | 7     | 9.2  | 34  | 17    | mA    |
| Grid-No.2 Current .....                                       | —     | —    | 13  | 4     | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA ..... | -5.5  | -6.5 | —   | -6    | volts |

MAXIMUM CIRCUIT VALUES


|                                  |     |     |   |  |        |
|----------------------------------|-----|-----|---|--|--------|
| Grid-No.1-Circuit Resistance:    |     |     |   |  |        |
| For fixed-bias operation .....   | 0.5 | 0.5 | 1 |  | megohm |
| For cathode-bias operation ..... | 1   | 1   | 1 |  | megohm |

- Refer to chart at end of section. **14C5**
- Refer to chart at end of section. **14C7**
- Refer to chart at end of section. **14E6**
- Refer to chart at end of section. **14E7**
- Refer to chart at end of section. **14F7**
- Refer to chart at end of section. **14F8**
- Refer to chart at end of section. **14GT8**
- Refer to chart at end of section. **14H7**
- Refer to chart at end of section. **14J7**
- Refer to chart at end of section. **14JG8**
- Refer to chart at end of section. **14N7**
- Refer to chart at end of section. **14Q7**
- Refer to chart at end of section. **14R7**
- Refer to chart at end of section. **15**
- Refer to type 6AF11. **15AF11**
- Refer to chart at end of section. **15BD11**
- Refer to chart at end of section. **15BD11A**
- Refer to chart at end of section. **15CW5**
- Refer to type 6CW5/EL86. **15CW5/PL84**
- Refer to chart at end of section. **15DQ8**

# 15DQ8/ PCL84

## HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receiver applications. The triode unit is used as a sync-separator, sync-amplifier, keyed-age, or noise-suppressor tube. The pentode unit is used as a video-output tube. Outlines section, 6E; requires miniature 9-contact socket.



9HX

|                                   |          |        |
|-----------------------------------|----------|--------|
| Heater Voltage (ac/dc) .....      | 15       | volts  |
| Heater Current .....              | 0.3      | ampere |
| Peak Heater-Cathode Voltage ..... | ±200 max | volts  |

### Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values)                        | Triode Unit | Pentode Unit |       |
|--|-------------|--------------|-------|
| Plate Supply Voltage .....                                     | 550         | 550          | volts |
| Peak Plate Voltage, with maximum plate current of 0.1 mA ..... | 600         | —            | volts |
| Plate Voltage .....  | 250         | 250          | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                   | —           | 550          | volts |
| Grid-No.2 Voltage .....  | —           | 250          | volts |
| Cathode Current .....  | 12          | 40           | mA    |
| Plate Dissipation .....  | 1           | 4            | watts |
| Grid-No.2 Input .....  | —           | 1.7          | watts |

| CHARACTERISTICS                         | Triode Unit | Pentode Unit |       |       |        |
|---|-------------|--------------|-------|-------|--------|
| Plate Voltage .....                     | 200         | 170          | 200   | 200   | volts  |
| Grid-No.2 Voltage .....                 | —           | 170          | 200   | 220   | volts  |
| Grid-No.1 Voltage .....                 | -1.7        | -2.1         | -2.9  | -3.4  | volts  |
| Amplification Factor .....              | 65          | —            | —     | —     |        |
| Mu-Factor, Grid-No.2 to Grid-No.1 ..... | —           | 36           | 36    | 36    |        |
| Plate Resistance (Approx.) .....        | —           | 0.1          | 0.13  | 0.15  | megohm |
| Transconductance .....                  | 4000        | 11000        | 10400 | 10000 | μmhos  |
| Plate Current .....                     | 3           | 18           | 18    | 18    | mA     |
| Grid-No.2 Current .....                 | —           | 3            | 3     | 3     | mA     |

### TYPICAL OPERATION OF PENTODE UNIT AS VIDEO OUTPUT TUBE

|                             |       |       |      |       |
|-----------------------------|-------|-------|------|-------|
| Plate Supply Voltage .....  | 170   | 200   | 220  | volts |
| Series Plate Resistor ..... | 3000  | 3000  | 3000 | ohms  |
| Grid-No.2 Voltage .....     | 170   | 200   | 220  | volts |
| Grid-No.1 Voltage .....     | -2    | -2.3  | -3.3 | volts |
| Transconductance .....      | 10400 | 10000 | 9700 | μmhos |
| Plate Current .....         | 18    | 18    | 18   | mA    |
| Grid-No.2 Current .....     | 3.2   | 3.1   | 3.1  | mA    |

### MAXIMUM CIRCUIT VALUES

| Grid-No.1-Circuit Resistance:    | Triode Unit | Pentode Unit |         |
|----------------------------------|-------------|--------------|---------|
| For fixed-bias operation .....   | 1           | 1            | megohm  |
| For cathode-bias operation ..... | 3           | 2            | megohms |

• With maximum duty factor of 0.18 and maximum pulse duration of 18 microseconds.

**15EA7** For replacement use type 13EM7/15EA7.

**15EW7** Refer to type 6EW7.

**15FM7** Refer to chart at end of section.

For replacement use type 13FM7/15FM7.

**15FY7** Refer to type 6FY7.

**15HB6** Refer to chart at end of section.

**15KY8** Refer to chart at end of section.

**15KY8A** Refer to type 6KY8A.

**15LE8** Refer to chart at end of section.

Refer to type 6MF8.

15MF8


Refer to chart at end of section.

16A8

# 16A8/ PCL82

8B8

## HIGH-MU TRIODE— POWER PENTODE



9EX

Miniature type used in television receiver applications. The triode unit is used as a vertical oscillator or as an af amplifier, and the pentode unit is used as a vertical output tube or as an audio output tube. Outlines section, 6G; requires miniature 9-contact socket. Type 8B8 is identical with type 16A8/PCL82 except for heater ratings.

|                        |      |      |        |
|------------------------|------|------|--------|
| Heater Voltage         | 8    | 16   | volts  |
| Heater Current         | 0.6  | 0.3  | ampere |
| Heater-Cathode Voltage | ±200 | ±200 | volts  |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|  | Triode Unit | Pentode Unit |       |
|--|-------------|--------------|-------|
| Plate Supply Voltage                   | 550         | 550          | volts |
| Peak Plate Voltage*                    | 600         | 2500         | volts |
| Plate Voltage                          | 250         | 250          | volts |
| Peak Inverse Plate Voltage             | —           | 500          | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage | —           | 550          | volts |
| Grid-No.2 Voltage                      | —           | 250          | volts |
| Cathode Current                        | 15          | 50           | mA    |
| Plate Dissipation (Frame Output)       | —           | 5            | watts |
| Plate Dissipation (Audio Output)       | —           | 7            | watts |
| Grid-No.2 Input                        | —           | 1.8          | watts |
| Peak Grid-No.2 Input                   | —           | 3.2          | watts |


#### CHARACTERISTICS

|                                   | Triode Unit | Pentode Unit |       |       |       |       |
|-----------------------------------|-------------|--------------|-------|-------|-------|-------|
| Plate Voltage                     | 100         | 100          | 170   | 200   | 200   | volts |
| Grid-No.2 Voltage                 | —           | 100          | 170   | 200   | 200   | volts |
| Grid-No.1 Voltage                 | 0           | -6           | -11.5 | -12.5 | -16   | volts |
| Amplification Factor              | 70          | —            | —     | —     | —     |       |
| Mu Factor, Grid No.2 to Grid No.1 | —           | 10           | 9.5   | 9.5   | 9.5   |       |
| Plate Resistance                  | —           | 15000        | 16000 | 20500 | 20000 | ohms  |
| Transconductance                  | 2500        | 6800         | 7500  | 6800  | 6400  | μmhos |
| Plate Current                     | 3.5         | 26           | 41    | 35    | 7     | mA    |
| Grid-No.2 Current                 | —           | 5            | 8     | 6.5   | 35    | mA    |

#### MAXIMUM CIRCUIT VALUES

|                               |   |   |         |
|-------------------------------|---|---|---------|
| Grid-No.1-Circuit Resistance: |   |   |         |
| For fixed-bias operation      | 1 | 1 | megohm  |
| For cathode-bias operation    | 3 | 2 | megohms |

\* With a maximum duty factor of 0.04 and maximum pulse duration of 0.8 milliseconds.



12GZ

## DUAL TRIODE— BEAM POWER TUBE

# 16AK9

Duodecar type used in vertical-deflection-amplifier, vertical oscillator and sync-clipper applications, in color television receivers. Outlines section, 15A; requires duodecar 12-contact socket. Heater: volts (ac/dc), 16.4; amperes, 0.6; average warm-up time, 11 seconds; maximum heater-cathode volts, ±200 peak, 100 average.

Class A<sub>1</sub> Amplifier

| CHARACTERISTICS   | Triode     | Triode     | Beam Power |       |       |
|---|------------|------------|------------|-------|-------|
|   | Unit No. 1 | Unit No. 2 | Unit       |       |       |
| Plate Voltage   | 150        | 150        | 60         | 150   | volts |
| Grid-No.2 (Screen-Grid) Voltage                         | —          | —          | 125        | 150   | volts |
| Grid-No.1 (Control-Grid) Voltage                        | -2         | -5         | 0          | -14   | volts |
| Plate Resistance (Approx.)                              | 11000      | 8500       | —          | 16400 | ohms  |
| Transconductance  | 3900       | 2350       | —          | 6200  | μmhos |
| Plate Current   | 5.4        | 6.5        | 140        | 49    | mA    |
| Grid-No.2 Current                                       | —          | —          | 18         | 3.5   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | -5.7       | -11        | —          | -33   | volts |
| Amplification Factor                                    | 43         | 20         | —          | —     |       |

## Vertical-Deflection Oscillator and Amplifier

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS<br>(Design-Maximum Values) | Triode                  | Triode                   | Beam Power        |   |       |
|--|-------------------------|--------------------------|-------------------|---|-------|
|  | Unit No. 1<br>Amplifier | Unit No. 2<br>Oscillator | Unit<br>Amplifier |   |       |
| Plate Voltage                              | 330                     | 330                      | 350               | — | volts |
| Peak Positive-Pulse Plate Voltage#         | —                       | —                        | 2500              | — | volts |
| Grid-No.2 Voltage                          | —                       | —                        | 250               | — | volts |
| Peak Negative-Pulse Grid-No.1 Voltage      | —                       | 400                      | 150               | — | volts |
| Grid Voltage, Positive-bias value          | 0                       | —                        | —                 | — | volt  |
| Plate Dissipation                          | 1.25                    | 1                        | 10                | — | watts |
| Grid-No.2 Input                            | —                       | —                        | 2                 | — | watts |
| Peak Plate Current                         | —                       | 70                       | 245               | — | mA    |
| Average Plate Current                      | —                       | 20                       | 80                | — | mA    |
| Peak Grid-No.2 Current                     | —                       | —                        | 245               | — | mA    |
| Average Grid-No.2 Current                  | —                       | —                        | 80                | — | mA    |

## MAXIMUM CIRCUIT VALUES

|                                  |     |     |     |  |         |
|----------------------------------|-----|-----|-----|--|---------|
| Grid-No.1 Circuit Resistance:    |     |     |     |  |         |
| For fixed-bias operation         | 0.5 | 1   | 1   |  | megohm  |
| For degenerative-bias operation* | —   | 2.2 | 2.2 |  | megohms |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).


\* A cathode resistor or any feedback system which achieves an equivalent reduction in gain.

## 16AQ3

Refer to chart at end of section.  
For replacement use type 16AQ3/XY88.16AQ3/  
XY88

20AQ3/LY88

## DIODE



9CB

Miniature type used as booster diodes in line-time-base circuits of transformerless television receivers.

Outlines section, 7D; requires miniature 9-contact socket. Type 20AQ3/LY88 is identical with type 16AQ3/XY88 except for heater ratings.

|                             | 16AQ3/<br>XY88 | 20AQ3/<br>LY88 |        |
|-----------------------------|----------------|----------------|--------|
| Heater Voltage (ac/dc)      | 16.4           | 20.2           | volts  |
| Heater Current              | 0.6            | 0.45           | ampere |
| Peak Heater-Cathode Voltage | 6600           | 6600           | volts  |

## MAXIMUM RATINGS (Design-Center Values)

|                                    |       |       |
|------------------------------------|-------|-------|
| Supply Voltage at zero current     | 550   | volts |
| Supply Voltage                     | 250   | volts |
| Peak Plate Current                 | 550   | mA    |
| Average Plate Current              | 220   | mA    |
| Plate Dissipation                  | 5     | watts |
| Peak Negative-Pulse Plate Voltage* | 6000# | volts |

\* Under no conditions should an absolute maximum value of 7500 volts be exceeded.

# The pulse duration must not exceed 22 per cent of a cycle, or a maximum of 18 microseconds.

## 16BQ11

Refer to type 8BQ11.

|                                       |                      |
|---------------------------------------|----------------------|
| Refer to chart at end of section.     | <b>16BX11</b>        |
| Refer to type 6GK6.                   | <b>16GK6</b>         |
| Refer to type 6GY5.                   | <b>16GY5</b>         |
| Refer to chart at end of section.     | <b>16KA6</b>         |
| Refer to type 6LU8.                   | <b>16LU8A</b>        |
| Refer to chart at end of section.     | <b>17AB10</b>        |
|                                       | <b>17AB10/17AX10</b> |
| Refer to type 6AX3.                   | <b>17AX3</b>         |
| Refer to chart at end of section.     | <b>17AX4GT</b>       |
| Refer to type 6AX4GTB.                | <b>17AX4GTA</b>      |
| Refer to type 17AB10/17AX10.          | <b>17AX10</b>        |
| Refer to chart at end of section.     | <b>17AY3</b>         |
| Refer to type 6AY3B.                  | <b>17AY3A</b>        |
| Refer to chart at end of section.     | <b>17BB14</b>        |
| Refer to type 6BE3.                   | <b>17BE3</b>         |
| Refer to type 6BE3.                   | <b>17BE3/17BZ3</b>   |
| Refer to type 6BF11.                  | <b>17BF11</b>        |
| Refer to chart at end of section.     | <b>17BH3</b>         |
|                                       | <b>17BH3A</b>        |
| Refer to chart at end of section.     | <b>17BQ6GTB</b>      |
| Refer to chart at end of section.     | <b>17BR3</b>         |
| Refer to type 6BR3/6RK19.             | <b>17BR3/17RK19</b>  |
| Refer to chart at end of section.     | <b>17BS3</b>         |
| Refer to type 6BS3A.                  | <b>17BS3A</b>        |
|                                       | <b>17BS3A/17DW4A</b> |
| Refer to type 22BW3.                  | <b>17BW3</b>         |
| Refer to chart at end of section.     | <b>17BZ3</b>         |
| For replacement use type 17BE3/17BZ3. |                      |
| Refer to chart at end of section.     | <b>17C5</b>          |
| For replacement use type 17CU5/17C5.  |                      |
| Refer to type 6C9.                    | <b>17C9</b>          |
| Refer to chart at end of section.     | <b>17CK3</b>         |
| Refer to chart at end of section.     | <b>17CL3</b>         |
| Refer to type 12CT3.                  | <b>17CT3</b>         |

17CU5

Refer to type 6CU5.

17CU5/17C5

Refer to type 6CU5.

17D4

Refer to chart at end of section.

17DE4

Refer to type 6DE4/6CQ4.

17DM4

Refer to chart at end of section.

17DM4A

Refer to type 6DM4A/6DA4.

17DQ6A

Refer to chart at end of section.

17DW4A

Refer to chart at end of section.  
For replacement use type 17BS3A/17DW4A.

17EW8


Refer to chart at end of section.

## 17EW8/ HCC85

### HIGH-MU TWIN TRIODE

Miniature type used in rf-amplifier and oscillator-mixer circuits in FM and AM radio receivers. Outlines section, 6B; requires miniature 9-contact socket.

|   |  |
|---|--|
| Heater Voltage .....  |  |
| Heater Current .....  |  |
| Peak Heater-Cathode Voltage .....                               |  |
| Direct Interelectrode Capacitances:                             |  |
| Plate to Grid (Each Unit) .....                                 |  |
| Plate to Cathode (Each Unit) .....                              |  |
| Plate to Cathode, Heater, and Internal Shield (Each Unit) ..... |  |
| Grid to Cathode, Heater, and Internal Shield (Each Unit) .....  |  |
| Plate of Unit No.1 to Plate of Unit No.2 .....                  |  |
| Grid of Unit No.1 to Grid of Unit No.2 .....                    |  |
| Plate of Unit No.1 to Grid of Unit No.2 .....                   |  |
| Grid of Unit No.1 to Cathode of Unit No.1 .....                 |  |
| Plate of Unit No.1 to Grid of Unit No.2 .....                   |  |
| Plate of Unit No.1 to Cathode of Unit No.2 .....                |  |
| Plate of Unit No.2 to Cathode of Unit No.1 .....                |  |
| Grid of Unit No.1 to Triode of Unit No.2 .....                  |  |
| Grid of Unit No.2 to Triode of Unit No.1 .....                  |  |



9AJ

|           |        |
|-----------|--------|
| 17.5      | volts  |
| 0.15      | ampere |
| ±90 max   | volts  |
| 1.5       | pF     |
| 0.18      | pF     |
| 1.2       | pF     |
| 3         | pF     |
| 0.04 max  | pF     |
| 0.003 max | pF     |
| 0.008 max | pF     |
| 0.008 max | pF     |
| 0.008 max | pF     |
| 0.008 max | pF     |
| 0.003 max | pF     |
| 0.003 max | pF     |

### Class A<sub>1</sub> Amplifier (Each Unit)

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                     | 250 | volts |
| Grid-Voltage, Negative-bias Value ..... | 100 | volts |
| Cathode Current .....                   | 15  | mA    |
| Plate Dissipation .....                 | 2.5 | watts |

#### CHARACTERISTICS

|                            |       |      |      |       |
|----------------------------|-------|------|------|-------|
| Plate Voltage .....        | 100   | 170  | 200  | volts |
| Grid Voltage .....         | -1.1* | -1.5 | -2.1 | volts |
| Amplification Factor ..... | 50    | 50   | 48   |       |
| Transconductance .....     | 4600  | 6200 | 5800 | μmhos |
| Plate Current .....        | 4.5   | 10   | 10   | mA    |

#### MAXIMUM CIRCUIT VALUE

|                               |   |        |
|-------------------------------|---|--------|
| Grid-Circuit Resistance ..... | 1 | megohm |
|-------------------------------|---|--------|

\* Should not be used if grid current is not permissible.

17GE5

Refer to type 6GE5.




|  |                     |
|--|---------------------|
| Refer to chart at end of section.      | <b>17GJ5</b>        |
| Refer to type 6GJ5A.                   | <b>17GJ5A</b>       |
| Refer to chart at end of section.      | <b>17GT5</b>        |
| Refer to type 6GT5A.                   | <b>17GT5A</b>       |
| Refer to type 6GV5.                    | <b>17GV5</b>        |
| Refer to chart at end of section.      | <b>17GW6/17DQ6B</b> |
| Refer to chart at end of section.      | <b>17H3</b>         |
| Refer to chart at end of section.      | <b>17HB25</b>       |
| Refer to chart at end of section.      | <b>17JB6</b>        |
| Refer to type 6JB6A.                   | <b>17JB6A</b>       |
| Refer to type 6JF6.                    | <b>17JF6</b>        |
| Refer to chart at end of section.      | <b>17JG6</b>        |
| Refer to type 6JG6A.                   | <b>17JG6A</b>       |
| Refer to chart at end of section.      | <b>17JM6</b>        |
| Refer to type 6JM6A.                   | <b>17JM6A</b>       |
| Refer to type 6JN6.                    | <b>17JN6</b>        |
| Refer to type 6JQ6.                    | <b>17JQ6</b>        |
| Refer to type 6JR6.                    | <b>17JR6</b>        |
| Refer to chart at end of section.      | <b>17JT6</b>        |
| Refer to type 6JT6A.                   | <b>17JT6A</b>       |
| Refer to type 6JZ8.                    | <b>17JZ8</b>        |
| Refer to chart at end of section.      | <b>17KV6</b>        |
| Refer to type 6KV6A.                   | <b>17KV6A</b>       |
| Refer to chart at end of section.      | <b>17LD8</b>        |
| For replacement use type 15KY8A.       | <b>17RK19</b>       |
| For replacement use type 17BR3/17RK19. | <b>17X10</b>        |
| Refer to chart at end of section.      | <b>17Z3/PY81</b>    |
| For replacement use type 17AB10/17X10. | <b>18A5</b>         |
| Refer to chart at end of section.      | <b>18AJ10</b>       |
| Refer to chart at end of section.      | <b>18FW6</b>        |
| Refer to chart at end of section.      | <b>18FW6A</b>       |
| Refer to chart at end of section.      | <b>18FX6</b>        |
| Refer to chart at end of section.      | <b>18FX6A</b>       |
| Refer to chart at end of section.      | <b>18FY6</b>        |
| Refer to chart at end of section.      | <b>18FY6A</b>       |

|                                 |   |
|---------------------------------|---|
| <b>18GB5</b>                    | Refer to chart at end of section.   |
| <b>18GB5/LL500</b>              | Refer to type 6GB5/EL500.   |
| <b>18GD6A</b>                   | Refer to chart at end of section.   |
| <b>18GV8/PCL85</b>              | Refer to type 6GV8/ECL85.   |
| <b>19</b>                       | Refer to chart at end of section.   |
| <b>19AU4</b>                    | Refer to chart at end of section.   |
| <b>19AU4GTA</b>                 | Refer to chart at end of section.   |
| <b>19BG6G</b><br><b>19BG6GA</b> | Refer to chart at end of section.   |
| <b>19CG3</b>                    | Refer to type 6CG3.   |
| <b>19CL8A</b>                   | Refer to chart at end of section.<br>For replacement use type 19JN8/19CL8A. |
| <b>19DE3</b>                    | Refer to chart at end of section.   |

**19DK3****HALF-WAVE  
VACUUM RECTIFIER**

Novar type used as a damper tube in television receivers. Outlines section, 35A; requires novar 9-contact socket. Socket terminals 1, 3, 6, 8 and 9, should not be used as tie points.

**9SG**

|                                     |      |         |
|-------------------------------------|------|---------|
| Heater Voltage (ac/dc) .....        | 19   | volts   |
| Heater Current .....                | 0.6  | ampere  |
| Heater Warm-up Time (Average) ..... | 11   | seconds |
| Direct Interelectrode Capacitances: |      |         |
| Cathode to Plate and Heater .....   | 22.0 | pF      |
| Plate to Cathode and Heater .....   | 13.6 | pF      |
| Heater to Cathode .....             | 1.1  | pF      |

**Damper Service**

For operation in a 525-line, 30-frame system

|   |      |       |       |
|---|------|-------|-------|
| Peak Inverse Plate Voltage# .....         | 6500 | volts |       |
| Peak Plate Current .....                  | 1200 | mA    |       |
| Average Plate Current .....               | 400  | mA    |       |
| Plate Dissipation .....                   | 9    | watts |       |
| Bulb Temperature (At hottest point) ..... | 220  | °C    |       |
| Heater-Cathode Voltage:                   |      |       |       |
| Peak value .....                          | +300 | -6500 | volts |
| Average value .....                       | +100 | -900  | volts |

**CHARACTERISTIC, Instantaneous Value**


|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 800 mA ..... | 25 | volts |
|---|----|-------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle.

**19EA8** Refer to type 6EA8.

**19EZ8** Refer to chart at end of section.

|                                   |                     |
|-----------------------------------|---------------------|
| Refer to type 12FX5.              | <b>19FX5</b>        |
| Refer to chart at end of section. | <b>19GQ7</b>        |
| Refer to chart at end of section. | <b>19HR6</b>        |
| Refer to chart at end of section. | <b>19HS6</b>        |
| Refer to chart at end of section. | <b>19HV8</b>        |
| Refer to chart at end of section. | <b>19J6</b>         |
| Refer to chart at end of section. | <b>19JN8</b>        |
| Refer to type 6JN8.               | <b>19JN8/19CL8A</b> |
| Refer to chart at end of section. | <b>19KG8</b>        |
| For replacement use type 18GD6A.  | <b>19MR9</b>        |
| For replacement use type 18FW6A.  | <b>19MR19</b>       |
| Refer to chart at end of section. | <b>19Q9</b>         |
| Refer to type 6X8A.               | <b>19X8</b>         |
| Refer to chart at end of section. | <b>20</b>           |
| Refer to type 16AQ3/XY88.         | <b>20AQ3/LY88</b>   |
| Refer to chart at end of section. | <b>20EQ7</b>        |
| Refer to chart at end of section. | <b>20EZ7</b>        |
| Refer to type 6LF6.               | <b>20LF6</b>        |
| Refer to chart at end of section. | <b>21EX6</b>        |
| Refer to type 6GY5.               | <b>21GY5</b>        |
| Refer to chart at end of section. | <b>21HB5</b>        |



**BEAM POWER TUBE**

**21HB5A**

Duodecar type used as horizontal-deflection amplifier in television receivers. Outlines section, 15B; requires duodecar 12-contact socket. For maximum ratings, refer to type 6HB5. Heater: volts (ac/dc), 21; amperes, 0.45; warm-up time (average), 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                  | Pentode Connection |     | Triode* Connection |            |
|----------------------------------|--------------------|-----|--------------------|------------|
|                                  | 5000               | 130 | 130                |            |
| Plate Voltage                    | 5000               | 50  | 130                | volts      |
| Grid-No.2 (Screen-Grid) Voltage  | 130                | 130 | 130                | volts      |
| Grid-No.1 (Control-Grid) Voltage | —                  | 0   | -20                | volts      |
| Amplification Factor             | —                  | —   | 4.8                |            |
| Plate Resistance (Approx.)       | —                  | —   | 9500               | ohms       |
| Transconductance                 | —                  | —   | 9000               | $\mu$ mhos |

|   |     |      |     |   |       |
|---|-----|------|-----|---|-------|
| Plate Current   | —   | 450* | 46  | — | mA    |
| Grid-No.2 Current                                     | —   | 29*  | 1.8 | — | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | -64 | —    | -32 | — | volts |

\* Grid-No.2 tied to plate

■ This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**21HJ5**

Refer to chart at end of section.

**21JS6A**


For replacement use type 23JS6A.

**21JV6**

Refer to chart at end of section.

**21JZ6****BEAM POWER TUBE**

Duodecax type used as horizontal-deflection amplifier in television receivers. Outlines section, 15C; requires duodecax 12-contact socket. Heater: volts (ac/dc), 21; amperes, 0.45; average warm-up time, 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS   | Triode <sup>A</sup> Connection |                                | Pentode Connection |      |       |
|---|--------------------------------|--------------------------------|--------------------|------|-------|
|   | 130                            | 5000                           | 50                 | 130  |       |
| Plate Voltage   | 130                            | 5000                           | 50                 | 130  | volts |
| Grid No.3 (Suppressor Grid) Voltage                     | —                              | Connected to cathode at socket | —                  | —    | volts |
| Grid-No.2 (Screen-Grid) Voltage                         | —                              | 130                            | 130                | 130  | volts |
| Grid-No.1 (Control-Grid) Voltage                        | -20                            | —                              | 0                  | -20  | volts |
| Amplification Factor                                    | 4.8                            | —                              | —                  | —    |       |
| Plate Resistance (Approx.)                              | —                              | —                              | —                  | 9000 | ohms  |
| Transconductance  | —                              | —                              | —                  | 9000 | μmhos |
| Plate Current   | —                              | —                              | 450                | 46   | mA    |
| Grid-No.2 Current                                       | —                              | —                              | 29                 | 1.8  | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1.0 mA | —                              | -64                            | —                  | -32  | volts |

<sup>A</sup> Grid No.2 connected to plate.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system


**MAXIMUM RATINGS (Design-Maximum Values)**

|  |      |       |
|--|------|-------|
| Plate Supply Voltage                           | 770  | volts |
| Peak Positive-Pulse Plate Voltage <sup>#</sup> | 6500 | volts |
| Peak Negative-Pulse Plate Voltage              | 1500 | volts |
| DC Grid-No.3 Voltage, Positive-bias value      | 70   | volts |
| Grid-No.2 Voltage                              | 220  | volts |
| DC Grid-No.1 Voltage, Negative-bias value      | 55   | volts |
| Peak Negative-Pulse Grid-No.1 Voltage          | 330  | volts |
| Peak Cathode Current                           | 800  | mA    |
| Average Cathode Current                        | 230  | mA    |
| Plate Dissipation*                             | 18   | watts |
| Grid-No.2 Input                                | 3.5  | watts |
| Bulb Temperature (At hottest point)            | 220  | °C    |

**MAXIMUM CIRCUIT VALUE**

|                              |   |        |
|------------------------------|---|--------|
| Grid-No.1-Circuit Resistance | 1 | megohm |
|------------------------------|---|--------|

\* A bias resistor or other means is required to protect the tube in absence of excitation.  
<sup>#</sup> Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).



BEAM POWER TUBE

21KA6

Duodecar type used as horizontal-deflection amplifier in television receivers. Outlines section, 16A; requires duodecar 12-contact socket. A separate connection is provided for grid No.3 to minimize "snivets."

12GH

|                           |          |         |
|---------------------------|----------|---------|
| Heater Voltage .....      | 21       | volts   |
| Heater Current .....      | 0.45     | ampere  |
| Heater Warm-up Time ..... | 11       | seconds |
| Heater-Cathode Voltage:   |          |         |
| Peak value .....          | ±200 max | volts   |
| Average value .....       | 100 max  | volts   |

Class A<sub>1</sub> Amplifier

|   |      |      |      |       |       |
|---|------|------|------|-------|-------|
| <b>CHARACTERISTICS</b>                                      |      |      |      |       |       |
| Plate Voltage .....   | 5000 | 60   | 60   | 130   | volts |
| Grid-No.3 (Suppressor-Grid) Voltage .....                   | 0    | 0    | 25   | 0     | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                       | 130  | 130  | 130  | 130   | volts |
| Grid-No.1 (Control-Grid) Voltage .....                      | —    | 0    | 0    | —20   | volts |
| Plate Resistance (Approx.) .....                            | —    | —    | —    | 11000 | ohms  |
| Transconductance .....                                      | —    | —    | —    | 9100  | μmhos |
| Plate Current .....   | —    | 410* | 410* | 50    | mA    |
| Grid-No.3 Current .....                                     | —    | —    | 2    | —     | mA    |
| Grid-No.2 Current .....                                     | —    | 24*  | 23*  | 1.75  | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA ..... | —66  | —    | —    | —33   | volts |
| Triode Amplification Factor .....                           | —    | —    | —    | 4.7   |       |

\* This value may be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system


MAXIMUM RATINGS (Design-Maximum Values)

|  |      |       |
|--|------|-------|
| DC Plate Supply Voltage .....                | 770  | volts |
| Peak Positive-Pulse Plate Voltage# .....     | 6500 | volts |
| Peak Negative-Pulse Plate Voltage .....      | 1500 | volts |
| Grid-No.3 Voltage, Positive-bias value ..... | 70   | volts |
| Grid-No.2 Voltage .....                      | 220  | volts |
| Grid-No.1 Voltage, Negative-bias value ..... | 55   | volts |
| Peak Negative-Pulse Grid-No.1 Voltage .....  | 330  | volts |
| Average Cathode Current .....                | 230  | mA    |
| Peak Cathode Current .....                   | 800  | mA    |
| Plate Dissipation .....                      | 18   | watts |
| Grid-No.2 Input .....                        | 3.5  | watts |
| Bulb Temperature (At hottest point) .....    | 220  | °C    |

MAXIMUM CIRCUIT VALUE

|                                    |   |        |
|------------------------------------|---|--------|
| Grid-No.1-Circuit Resistance ..... | 1 | megohm |
|------------------------------------|---|--------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).



9RJ

BEAM POWER TUBE

21KQ6

29KQ6/PL521

Magnoval type used as horizontal-deflection amplifier in television receivers. Outlines section, 35B; requires magnoval 9-contact socket. Type 29KQ6/PL521 is identical with type 21KQ6 except for heater ratings.

|                      |       |             |        |
|----------------------|-------|-------------|--------|
| Heater Voltage ..... | 21KQ6 | 29KQ6/PL521 |        |
| Heater Current ..... | 21.5  | 29          | volts  |
|                      | 0.45  | 0.3         | ampere |

|                         |      |      |       |
|-------------------------|------|------|-------|
| Heater-Cathode Voltage: |      |      |       |
| Peak value .....        | ±240 | ±240 | volts |
| Average value .....     | ±240 | ±240 | volts |

### Class A<sub>1</sub> Amplifier

#### CHARACTERISTICS

|   |          |      |       |
|---|----------|------|-------|
| Plate Voltage .....                                     | 40       | 50   | volts |
| Grid-No.3 (Suppressor-Grid) Voltage .....               | 0        | 0    | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                   | 135      | 200  | volts |
| Grid-No.1 (Control-Grid) Voltage .....                  | 0        | -12  |       |
| Plate Current .....                                     | 450      | 550† | mA    |
| Grid-No.2 Current .....                                 | 35       | 50†  | mA    |
| Grid-No.1 Voltage for plate current of 50 $\mu$ A ..... | -55 max. | —    | volts |

† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |      |       |
|---|------|-------|
| Plate Voltage .....                         | 275  | volts |
| Peak Positive-Pulse Plate Voltage# .....    | 6500 | volts |
| Peak Negative-Pulse Plate Voltage# .....    | 1650 | volts |
| Grid-No.3 Voltage .....                     | 70   | volts |
| Grid-No.2 Voltage .....                     | 275  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Average Cathode Current .....               | 275  | mA    |

#### MAXIMUM CIRCUIT VALUES

|   |     |         |
|---|-----|---------|
| Grid-No.1-Circuit Resistance .....                                    | 0.5 | megohm  |
| Grid-No.1-Circuit Resistance, for horizontal-deflection circuit ..... | 2.2 | megohms |

# Pulse duration must not exceed 22% of a horizontal scanning cycle (18 microseconds).


21LG6

Refer to chart at end of section.

21LG6A

### BEAM POWER TUBE

Duodecar type used as horizontal-deflection amplifier in color television receivers. Outlines section, 16B; requires duodecar 12-contact socket. Heater: volts, 21; ampere, 0.6; maximum heater-cathode volts, ±200 peak, 100 average.



12HL

### Class A<sub>1</sub> Amplifier

| CHARACTERISTICS   | Triode* Connection |      | Pentode Connection |       |            |
|---|--------------------|------|--------------------|-------|------------|
|   |                    |      |                    |       |            |
| Plate Voltage .....   | 125                | 6000 | 50                 | 175   | volts      |
| Grid-No.2 (Screen-Grid) Voltage .....                       | 125                | 125  | 125                | 125   | volts      |
| Grid-No.1 (Control-Grid) Voltage .....                      | -25                | —    | 0                  | -23   | volts      |
| Plate Resistance (Approx.) .....                            | —                  | —    | —                  | 7500  | ohms       |
| Transconductance .....                                      | —                  | —    | —                  | 11500 | $\mu$ mhos |
| Plate Current .....   | —                  | —    | 600                | 90    | mA         |
| Grid-No.2 Current .....                                     | —                  | —    | 42                 | 1.7   | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA ..... | —                  | -115 | —                  | -45   | volts      |
| Amplification Factor .....                                  | 3.6                | —    | —                  | —     |            |

### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|  |      |       |
|--|------|-------|
| DC Plate Supply Voltage .....            | 900  | volts |
| Peak Positive-Pulse Plate Voltage# ..... | 7500 | volts |
| Peak Negative-Pulse Plate Voltage .....  | 100  | volts |

|  |      |       |
|--|------|-------|
| Grid-No.2 Voltage                      | 250  | volts |
| Grid-No.1 Voltage, Negative-bias value | 300  | volts |
| Plate Dissipation                      | 28   | watts |
| Grid-No.2 Input                        | 5    | watts |
| Average Cathode Current                | 315  | mA    |
| Peak Cathode Current                   | 1100 | mA    |
| Bulb Temperature                       | 250  | °C    |

**MAXIMUM CIRCUIT VALUES**

|  |     |         |
|--|-----|---------|
| Grid-No.1 Circuit Resistance:                            |     |         |
| With feedback type high voltage regulation               | 1.8 | megohms |
| With shunt-type high voltage regulation (switching mode) | 2.2 | megohms |

\* Grid-No. 2 tied to plate.

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

■ A bias resistor or other means is required to protect the tube in absence of excitation.

Refer to type 6LR8.

**21LR8**

Refer to type 6LU8.

**21LU8**

Refer to chart at end of section.

**21MY8**

Refer to chart at end of section.


**22**

Refer to chart at end of section.

**22BH3**

Refer to chart at end of section.

**22BH3A**



**HALF-WAVE  
VACUUM RECTIFIER**

**22BW3**

17BW3

Duodecar type used as damper tube in horizontal-deflection circuits of television receivers. Outlines section, 8D; requires duodecar 12-contact socket. Type 17BW3 is identical with type 22BW3 except for heater ratings.

|                                     |       |       |         |
|-------------------------------------|-------|-------|---------|
| Heater Voltage (ac/dc)              | 17BW3 | 22BW3 |         |
| Heater Current                      | 16.8  | 22.4  | volts   |
| Heater Warm-up Time                 | 0.6   | 0.45  | ampere  |
|                                     | 11    | 11    | seconds |
| Direct Interelectrode Capacitances: |       |       |         |
| Cathode to Heater and Plate         |       | 8.5   | pF      |
| Plate to Cathode and Heater         |       | 6     | pF      |
| Heater to Cathode                   |       | 3.8   | pF      |

**Damper Service**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                             |      |       |       |
|-----------------------------|------|-------|-------|
| Peak Inverse Plate Voltage# | 5000 | volts |       |
| Peak Plate Current          | 1100 | mA    |       |
| Average Plate Current       | 175  | mA    |       |
| Plate Dissipation           | 6.5  | watts |       |
| Heater-Cathode Voltage:     |      |       |       |
| Peak value                  | +300 | -5000 | volts |
| Average value               | +100 | -900  | volts |

**CHARACTERISTICS, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 350 mA | 32 | volts |
|---|----|-------|

# Pulse duration must not exceed 15% of one horizontal scanning cycle (10 microseconds).

Refer to type 6DE4/6CQ4.

**22DE4**

Refer to type 6JF6.

**22JF6**

Refer to chart at end of section.

**22JG6**


Refer to type 6JG6A.

**22JG6A**

|        |                      |
|--------|----------------------|
| 22JR6  | Refer to type 6JR6.  |
| 22JU6  | Refer to type 6JU6.  |
| 22KM6  | Refer to type 6KM6.  |
| 22KV6A | Refer to type 6KV6A. |
| 23JS6A | Refer to type 6JS6C. |

**23Z9****DUAL TRIODE—  
BEAM POWER TUBE**

Duodecar type used in combined vertical-deflection-oscillator and vertical-deflection-amplifier applications in television receivers. Outlines section, 8B; requires duodecar 12-contact socket. Heater: volts (ac/dc), 23; amperes, 0.45; average warm-up time, 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**12GZ****Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS   | Triode    | Triode    | Beam Power |       |       |
|---|-----------|-----------|------------|-------|-------|
|   | Unit No.1 | Unit No.2 | Unit       | Unit  |       |
| Plate Voltage   | 150       | 150       | 45         | 120   | volts |
| Grid-No.2 (Screen-Grid) Voltage                         | —         | —         | 110        | 110   | volts |
| Grid-No.1 (Control-Grid) Voltage                        | -2        | -5        | 0          | -8    | volts |
| Amplification Factor                                    | 43        | 20        | —          | —     |       |
| Plate Resistance (Approx.)                              | 11000     | 8500      | —          | 11700 | ohms  |
| Transconductance  | 3900      | 2350      | —          | 7100  | μmhos |
| Plate Current   | 5.4       | 5.5       | 122        | 46    | mA    |
| Grid-No.2 Current                                       | —         | —         | 16.5       | 3.5   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | —         | —         | —          | -25   | volts |
| Grid Voltage (Approx.) for plate current of 10 μA       | -5.7      | -11       | —          | —     | volts |

**Vertical-Deflection Oscillator and Amplifier**

For operation in a 525-line, 30-frame system

| MAXIMUM RATINGS (Design-Maximum Values) | Triode                 | Triode                  | Beam Power |           |       |
|---|------------------------|-------------------------|------------|-----------|-------|
|   | Unit No.1<br>Amplifier | Unit No.2<br>Oscillator | Unit       | Amplifier |       |
| Plate Voltage                           | 330                    | 250                     | 250        | 250       | volts |
| Peak Positive-Pulse Plate Voltage#      | —                      | —                       | —          | 2000      | volts |
| Grid-No.2 Voltage                       | —                      | —                       | —          | 200       | volts |
| Peak Negative-Pulse Grid-No.1 Voltage   | —                      | 400                     | —          | 150       | volts |
| Grid Voltage, Positive-bias value       | 0                      | —                       | —          | —         | volts |
| Plate Dissipation                       | 125                    | 1                       | —          | 7         | watts |
| Grid-No.2 Input                         | —                      | —                       | —          | 1.8       | watts |
| Peak Cathode Current                    | —                      | —                       | —          | 245       | mA    |
| Average Cathode Current                 | —                      | —                       | —          | 70        | mA    |
| Peak Plate Current                      | —                      | 70                      | —          | —         | mA    |
| Average Plate Current                   | —                      | 20                      | —          | —         | mA    |

**MAXIMUM CIRCUIT VALUES**

|   |     |   |   |        |
|---|-----|---|---|--------|
| Grid-No.1-Circuit Resistance:<br>For fixed-bias operation | 0.5 | 1 | 1 | megohm |
|---|-----|---|---|--------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

|        |   |
|--------|---|
| 24A    | Refer to chart at end of section.   |
| 24BF11 | Refer to type 6BF11.  |
| 24JE6A | Refer to chart at end of section.<br>For replacement use type 24LQ6/24JE6C. |
| 24JZ8  | Refer to type 6JZ8.   |




|                                   |                |
|-----------------------------------|----------------|
| Refer to type 6LQ6.               | 24LQ6          |
| Refer to type 6LQ6.               | 24LQ6/24JE6C   |
| Refer to chart at end of section. | 24LZ6          |
| Refer to chart at end of section. | 25A6           |
| Refer to chart at end of section. | 25A6GT         |
| Refer to chart at end of section. | 25A7GT         |
| Refer to chart at end of section. | 25AC5GT        |
| Refer to type 6AV5GA.             | 25AV5GA        |
| Refer to chart at end of section. | 25AX4GT        |
| Refer to chart at end of section. | 25B5           |
| Refer to chart at end of section. | 25B6G          |
| Refer to chart at end of section. | 25B8GT         |
| Refer to chart at end of section. | 25BK5          |
| Refer to chart at end of section. | 25BQ6GT        |
| Refer to type 6BQ6GTB/6CU6.       | 25BQ6GTB/25CU6 |
| Refer to type 50C5.               | 25C5           |
| Refer to chart at end of section. | 25C6G          |
| Refer to chart at end of section. | 25CA5          |
| Refer to chart at end of section. | 25CD6GA        |
| Refer to type 6CD6GA.             | 25CD6GB        |
| Refer to type 6CG3.               | 25CG3          |
| Refer to chart at end of section. | 25CK3          |
| Refer to chart at end of section. | 25CM3          |
| Refer to type 12CT3.              | 25CT3          |
| Refer to type 6BQ6GTB/6CU6.       | 25CU6          |
| Refer to type 6DL3.               | 25DL3          |
| Refer to chart at end of section. | 25DN6          |
| Refer to chart at end of section. | 25E5/PL36      |
| Refer to chart at end of section. | 25EC6          |
| Refer to type 6EH5.               | 25EH5          |
| Refer to chart at end of section. | 25F5A          |
| Refer to chart at end of section. | 25HX5          |
| Refer to chart at end of section. | 25JQ6          |
| Refer to type 6JZ8.               | 25JZ8          |
| Refer to chart at end of section. | 25L6           |

|               |   |
|---------------|---|
| 25L6GT/25W6GT | Refer to chart at end of section.   |
| 25N6G         | Refer to chart at end of section.   |
| 25W4GT        | Refer to chart at end of section.   |
| 25W6GT        | For replacement use type 25L6GT/25W6GT<br>Refer to chart at end of section. |
| 25Y5          | Refer to chart at end of section.   |
| 25Z5          | Refer to chart at end of section.   |
| 25Z6          | Refer to chart at end of section.   |
| 25Z6GT        | Refer to chart at end of section.   |
| 26            | Refer to chart at end of section.   |
| 26A6          | Refer to chart at end of section.   |
| 26A7GT        | Refer to chart at end of section.   |
| 26C6          | Refer to chart at end of section.   |
| 26D6          | Refer to chart at end of section.   |

## 26HU5

### BEAM POWER TUBE

Glass octal type used as horizontal-deflection amplifier in color television receivers. Outlines section, 20B; requires octal socket. Heater: volts (ac/dc), 26; ampere, 0.6; warm-up time (average), 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.



8NB

#### Class A<sub>1</sub> Amplifier

##### CHARACTERISTICS

|   | Triode† Connection |                   | Pentode Connection |       |            |
|---|--------------------|-------------------|--------------------|-------|------------|
| Plate Voltage   | 150                | 45                | 60                 | 175   | volts      |
| Grid-No.2 (Screen-Grid) Voltage                       | 150                | 160               | 110                | 110   | volts      |
| Grid-No.1 (Control-Grid) Voltage                      | -22.5              | 0                 | 0                  | -21   | volts      |
| Plate Resistance (Approx.)                            | —                  | —                 | —                  | 6000  | ohms       |
| Transconductance                                      | —                  | —                 | —                  | 14000 | $\mu$ mhos |
| Plate Current   | —                  | 1100 <sup>‡</sup> | 750 <sup>‡</sup>   | 125   | mA         |
| Grid-No.2 Current                                     | —                  | 110 <sup>‡</sup>  | 42 <sup>‡</sup>    | 3.3   | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | —                  | —                 | —                  | -40   | volts      |
| Amplification Factor                                  | 4                  | —                 | —                  | —     | —          |

† Grid No.2 tied to plate.

‡ This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

#### Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

##### MAXIMUM RATINGS (Design-Maximum Values)

|  |      |       |
|--|------|-------|
| DC Plate Supply Voltage                        | 990  | volts |
| Peak Positive Pulse Plate Voltage <sup>#</sup> | 7000 | volts |
| Grid-No.2 Voltage                              | 250  | volts |
| Grid-No.1 Voltage, Negative-bias value         | 250  | volts |
| Plate Dissipation* (Absolute-maximum value)    | 33   | watts |
| Grid-No.2 Input                                | 5    | watts |
| Average Cathode Current                        | 400  | mA    |
| Peak Cathode Current                           | 1400 | mA    |
| Bulb Temperature (At hottest point)            | 250  | °C    |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).  
 \* A bias resistor or other means is required to protect the tube in absence of excitation.


**MAXIMUM CIRCUIT VALUES**

Grid-No.1-Circuit Resistance:

|  |     |         |
|--|-----|---------|
| With Feedback-type high voltage regulation .....             | 1.2 | megohms |
| With Shunt-type high voltage regulation (switching mode) ... | 2.2 | megohms |

Refer to chart at end of section.

**26LW6**



**12JA**

**BEAM POWER TUBE**

**26LX6**

Duodecar type used as a horizontal-deflection amplifier in color and black-and-white television receivers. Outlines section, 16E; requires duodecar 12-contact socket. Heater: volts (ac/dc), 26; ampere, 0.6; warm-up time, 11 seconds; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|  | Triode* Connection |      | Pentode Connection             |       |            |
|--|--------------------|------|--------------------------------|-------|------------|
| Plate Voltage .....  | 175                | 5000 | 45                             | 175   | volts      |
| Grid-No. 3 (Suppressor-Grid) .....                           | —                  | —    | Connected to cathode at socket |       |            |
| Grid-No. 2 (Screen-Grid) Voltage .....                       | 175                | 110  | 160                            | 110   | volts      |
| Grid-No. 1 (Control-Grid) Voltage .....                      | -21                | —    | 0                              | -21   | volts      |
| Plate Resistance (Approx.) .....                             | —                  | —    | —                              | 6000  | ohms       |
| Transconductance .....                                       | —                  | —    | —                              | 14000 | $\mu$ mhos |
| Plate Current .....  | —                  | —    | 1100 $\pm$                     | 125   | mA         |
| Grid-No. 2 Current .....                                     | —                  | —    | 110 $\pm$                      | 3.3   | mA         |
| Grid-No. 1 Voltage (Approx.) for plate current of 1 mA ..... | —                  | -125 | —                              | —     | volts      |
| Amplification Factor .....                                   | 4                  | —    | —                              | —     |            |

\* Grid-No. 2 tied to plate.

† This value may be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |      |              |
|--|------|--------------|
| DC Plate Supply Voltage .....                                  | 990  | volts        |
| Peak Positive Pulse Plate Voltage# (Absolute Maximum Value) .. | 7000 | volts        |
| Peak Negative-Pulse Plate Voltage .....                        | 100  | volts        |
| Grid-No. 3 Voltage, Positive-bias value .....                  | 0    | volts        |
| Grid-No. 2 Voltage .....                                       | 250  | volts        |
| Peak Negative Grid-No. 1 Voltage .....                         | 250  | volts        |
| Peak Cathode Current .....                                     | 250  | volts        |
| Average Cathode Current .....                                  | 1400 | mA           |
| Plate Dissipation# (Absolute Maximum Value) .....              | 400  | mA           |
| Grid-No. 2 Input .....   | 33   | watts        |
| Bulb Temperature (At hottest point) .....                      | 5    | watts        |
|  | 240  | $^{\circ}$ C |

**MAXIMUM CIRCUIT VALUES**

Grid-No.1-Circuit Resistance:

|   |     |         |
|---|-----|---------|
| With feedback-type high voltage regulation .....            | 1.2 | megohms |
| With shunt-type high voltage regulation (switching mode) .. | 2.2 | megohms |

Grid-No.3-Circuit Resistance .....

|  |   |      |
|--|---|------|
|  | 0 | ohms |
|--|---|------|

**MINIMUM RECOMMENDED GRID DRIVE**

|  |      |      |       |
|--|------|------|-------|
| Peak Positive Pulse Plate Voltage .....                                    | 5000 | 6000 | volts |
| Peak Negative Grid-No. 1 Voltage for grid-No. 2 voltage of 150 volts ..... | -190 | -210 | volts |
| Peak Negative Grid-No. 1 Voltage for grid-No. 2 voltage of 200 volts ..... | -210 | -235 | volts |

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).  
 ■ A bias resistor or other means is required to protect the tube in absence of excitation.

27

Refer to chart at end of section.

27GB5/PL500

Refer to type 6GB5/EL500.


29KQ6/PL521

Refer to chart at end of section.

## 29LE6

## BEAM POWER TUBE

Magnoval type used as horizontal-deflection amplifier in television receivers. Outlines section, 35B; requires magnoval 9-contact socket.



9RJ

|                         |      |        |
|-------------------------|------|--------|
| Heater Voltage .....    | 29   | volts  |
| Heater Current .....    | 0.3  | ampere |
| Heater-Cathode Voltage: |      |        |
| Peak value .....        | ±240 | volts  |
| Average value .....     | ±240 | volts  |

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|   |          |      |       |
|---|----------|------|-------|
| Plate Voltage .....                                     | 40       | 50   | volts |
| Grid-No.3 (Suppressor-Grid) Voltage .....               | 0        | 0    | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                   | 135      | 200  | volts |
| Grid-No.1 (Control-Grid) Voltage .....                  | 0        | -12  | volts |
| Plate Current .....                                     | 450      | 550† | mA    |
| Grid-No.2 Current .....                                 | 35       | 50†  | mA    |
| Grid-No.1 Voltage for plate current of 50 $\mu$ A ..... | -55 max. | —    | volts |

† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

## Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Maximum Values)

|   |      |       |
|---|------|-------|
| Plate Voltage .....                         | 275  | volts |
| Peak Positive-Pulse Plate Voltage# .....    | 6500 | volts |
| Peak Negative-Pulse Plate Voltage# .....    | 1650 | volts |
| Grid-No.3 Voltage .....                     | 70   | volts |
| Grid-No.2 Voltage .....                     | 275  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Average Cathode Current .....               | 275  | mA    |

## MAXIMUM CIRCUIT VALUES

|   |     |         |
|---|-----|---------|
| Grid-No.1-Circuit Resistance .....                                    | 0.5 | megohm  |
| Grid-No.1-Circuit Resistance, for horizontal-deflection circuit ..... | 2.2 | megohms |

# Pulse duration must not exceed 22% of a horizontal scanning cycle (18 microseconds).


30

Refer to chart at end of section.

30AE3/  
PY88

## DIODE

Miniature type used as booster diodes in line-time-base circuits of transformerless television receivers. Outlines section, 7D; requires miniature 9-contact socket. Heater: volts (ac/dc), 30; amperes, 0.3; maximum heater-cathode volts, 6600 peak.



9CB


## MAXIMUM RATINGS (Design-Center Values)

|                                      |     |       |
|--------------------------------------|-----|-------|
| Supply Voltage at zero current ..... | 550 | volts |
| Supply Voltage .....                 | 250 | volts |
| Peak Plate Current .....             | 550 | mA    |

|  |       |       |
|--|-------|-------|
| Average Plate Current .....              | 220   | mA    |
| Plate Dissipation .....                  | 5     | watts |
| Peak Negative-Pulse Plate Voltage* ..... | 6000# | volts |

\* Under no conditions should an absolute maximum value of 7500 volts be exceeded.  
 # The pulse duration must not exceed 22 per cent of a cycle, or a maximum of 18 micro-seconds.

|                                   |               |
|-----------------------------------|---------------|
| Refer to chart at end of section. | <b>30AG11</b> |
| Refer to chart at end of section. | <b>30JZ6</b>  |
| Refer to type 6KD6.               | <b>30KD6</b>  |
| Refer to chart at end of section. | <b>30MB6</b>  |
| Refer to chart at end of section. | <b>31</b>     |
| Refer to chart at end of section. | <b>31AL10</b> |
| Refer to chart at end of section. | <b>31JS6A</b> |
| Refer to type 6JS6C.              | <b>31JS6C</b> |
| Refer to type 6LQ6.               | <b>31LQ6</b>  |
| Refer to type 6LR8.               | <b>31LR8</b>  |



**9QL**

**BEAM POWER TUBE**

**31LZ6**

Novar type used for horizontal-deflection amplifier in color television receivers. Outlines section, 18C; requires novar 9-contact socket.

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc) .....                                 | 31       | volts   |
| Heater Current .....   | 0.45     | ampere  |
| Heater Warm-up Time .....                                    | 11       | seconds |
| Heater-Cathode Voltage:                                      |          |         |
| Peak value .....   | ±200 max | volts   |
| Average value .....  | 100 max  | volts   |
| Direct Interelectrode Capacitances:                          |          |         |
| Grid No.1 to Plate .....                                     | 0.6      | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 22       | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 11       | pF      |

**Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                                   | Triode† Connection |      | Pentode Connection |       |       |
|---|--------------------|------|--------------------|-------|-------|
|   | 125                | —    | 55                 | 175   |       |
| Plate Voltage .....                               | —                  | 5000 | —                  | —     | volts |
| Peak Positive-Pulse Plate Voltage# .....          | —                  | —    | —                  | —     | volts |
| Grid No.3 (Suppressor Grid) .....                 | —                  | 30   | 30                 | 30    | volts |
| Grid-No.2 (Screen-Grid) Voltage .....             | 125                | 130  | 125                | 125   | volts |
| Grid-No.1 (Control-Grid) Voltage .....            | —25                | —    | 0                  | —25   | volts |
| Amplification Factor .....                        | 3                  | —    | —                  | —     |       |
| Plate Resistance (Approx.) .....                  | —                  | —    | —                  | 6000  | ohms  |
| Transconductance .....                            | —                  | —    | —                  | 11000 | μmhos |
| Plate Current .....                               | —                  | —    | 800††              | 140   | mA    |
| Grid-No.2 Current .....                           | —                  | —    | 56††               | 2     | mA    |
| Grid-No.1 Voltage for plate current of 1 mA ..... | —                  | —125 | —                  | —50   | volts |

**Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**



|  |      |       |
|--|------|-------|
| DC Plate Supply Voltage .....            | 990  | volts |
| Peak Positive-Pulse Plate Voltage# ..... | 7500 | volts |
| Peak Negative-Pulse Plate Voltage .....  | 1100 | volts |
| DC Grid-No.3 Voltage <sup>‡</sup> .....  | 75   | volts |

|   |      |       |
|---|------|-------|
| DC Grid-No.2 Voltage .....                  | 220  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Peak Cathode Current .....                  | 1200 | mA    |
| Average Cathode Current .....               | 350  | mA    |
| Grid-No.2 Input .....                       | 5    | watts |
| Plate Dissipation ■■ .....                  | 30   | watts |
| Bulb Temperature (At hottest point) .....   | 240  | °C    |

**MAXIMUM CIRCUIT VALUES**

|                                    |      |         |
|------------------------------------|------|---------|
| Grid-No.1-Circuit Resistance:      |      |         |
| For cathode-bias operation .....   | 1    | megohm  |
| For grid-leak-bias operation ..... | 10   | megohms |
| For fixed-bias operation .....     | 0.47 | megohm  |

- # Pulse duration must not exceed 15% of one horizontal scanning cycle (10 microseconds).
- † Grid No.2 connected to plate.
- †† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.
- In this service, a positive value may be applied to grid No.3 to minimize "snivets" interference; a typical value for this voltage is 30 volts.
- A bias resistor or other means is required to protect the tube in absence of excitation.

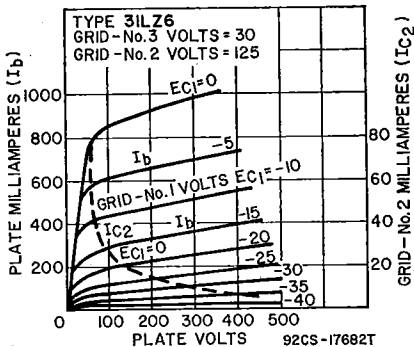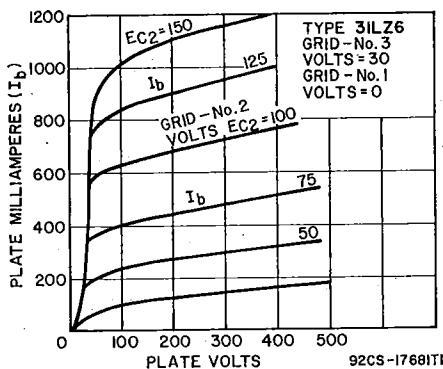


- 32
- 32ET5
- 32ET5A
- 32HQ7
- 32L7GT
- 33
- 33GT7
- 33GY7

- Refer to chart at end of section.
- Refer to chart at end of section.
- Refer to chart at end of section.
- Refer to chart at end of section.
- Refer to chart at end of section.
- Refer to chart at end of section.
- Refer to chart at end of section.

**33GY7A DIODE-BEAM POWER TUBE**

50GY7A

Duodecar type used as combined damper diode and horizontal-deflection amplifier in television receivers. Socket terminals 1, 3, 6 and 7 should not be used as tie points. Outlines section, 15A; requires duodecar 12-contact socket. Type 50GY7A is identical with type 33GY7A except for heater ratings.



|                               | 33GY7A   | 50GY7A   |         |
|-------------------------------|----------|----------|---------|
| Heater Voltage (ac/dc)        | 33.6     | 50       | volts   |
| Heater Current                | 0.45     | 0.3      | ampere  |
| Heater Warm-up Time (Average) | 11       | 11       | seconds |
| Heater-Cathode Voltage:       |          |          |         |
| Peak value                    | ±200 max | ±200 max | volts   |
| Average value                 | 100 max  | 100 max  | volts   |

**Beam Power Unit as Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS                                       | Pentode Connection |      |       | Triode* Connection |       |
|---|--------------------|------|-------|--------------------|-------|
|   | Plate Voltage      | 5000 | 60    | 130                |       |
| Grid-No.2 (Screen-Grid) Voltage                       | 130                | 130  | 130   | 130                | volts |
| Grid-No.1 (Control-Grid) Voltage                      | —                  | 0    | -22.5 | -22.5              | volts |
| Amplification Factor                                  | —                  | —    | —     | 4                  |       |
| Plate Resistance (Approx.)                            | —                  | —    | 10000 | —                  | ohms  |
| Transconductance                                      | —                  | —    | 6500  | —                  | μmhos |
| Plate Current   | —                  | 320* | 48    | —                  | mA    |
| Grid-No.2 Current                                     | —                  | 22*  | 2.9   | —                  | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | -80                | —    | -40   | —                  | volts |

\* Grid No.2 tied to plate.

‡ This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

**Beam Power Unit as Horizontal-Deflection Amplifier**

For operation in a 525-line, 50-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                       |      |       |
|---------------------------------------|------|-------|
| DC Plate Supply Voltage               | 400  | volts |
| Peak Positive-Pulse Plate Voltage#    | 5000 | volts |
| Peak Negative-Pulse Plate Voltage     | 0    | volts |
| DC Grid-No.2 Voltage                  | 150  | volts |
| DC Grid-No.1 Voltage                  | -65  | volts |
| Peak Negative-Pulse Grid-No.1 Voltage | 330  | volts |
| Peak Cathode Current                  | 540  | mA    |
| Average Cathode Current               | 155  | mA    |
| Plate Dissipation†                    | 9    | watts |
| Grid-No.2 Input                       | 3    | watts |

**MAXIMUM CIRCUIT VALUE**

|                              |   |        |
|------------------------------|---|--------|
| Grid-No.1-Circuit Resistance | 1 | megohm |
|------------------------------|---|--------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

† A bias resistor or other means is required to protect the tube in absence of excitation.

**Damper Service (Diode Unit)**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                     |      |       |       |
|-------------------------------------|------|-------|-------|
| Peak Inverse Plate Voltage#         | 4200 | volts |       |
| Peak Plate Current                  | 810  | mA    |       |
| Average Plate Current               | 135  | mA    |       |
| Plate Dissipation                   | 3.8  | watts |       |
| Heater-Cathode Voltage:             |      |       |       |
| Peak value                          | +200 | -4200 | volts |
| Average value                       | +100 | -400  | volts |
| Bulb Temperature (At hottest point) | 200  | °C    |       |

**CHARACTERISTICS, Instantaneous Value**

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 250 mA | 21 | volts |
|---|----|-------|

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

Refer to type 6JR6.

**33JR6**

Refer to chart at end of section.

**33JV6**

Refer to chart at end of section.

**34**

Refer to type 6CE3/6CD3/6DT3.

**34CE3**


Refer to chart at end of section.

**34CM3**

|               |                                   |
|---------------|-----------------------------------|
| <b>34GD5</b>  | Refer to chart at end of section. |
| <b>34GD5A</b> | Refer to chart at end of section. |
| <b>34R3</b>   | Refer to chart at end of section. |
| <b>35</b>     | Refer to chart at end of section. |
| <b>35A5</b>   | Refer to chart at end of section. |
| <b>35B5</b>   | Refer to chart at end of section. |

## 35C5 BEAM POWER TUBE

Miniature type used in output stage of compact, ac/dc radio receivers. Outlines section, 5D; requires miniature 7-contact socket. This tube, like other power-handling tubes, should be adequately ventilated. Except for terminal connections and slightly higher ratings, type 35C5 is equivalent in performance to miniature type 35B5 and, within its maximum ratings, to glass octal type 35L6GT.



|  |          |        |
|--|----------|--------|
| Heater Voltage (ac/dc)                                 | 35       | volts  |
| Heater Current   | 0.15     | ampere |
| Heater-Cathode Voltage:                                |          |        |
| Peak value   | ±200 max | volts  |
| Average value  | 100 max  | volts  |
| Direct Interelectrode Capacitances (Approx.):          |          |        |
| Grid No.1 to Plate                                     | 0.6      | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 12       | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | 9        | pF     |

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                     |     |       |
|-------------------------------------|-----|-------|
| Plate Voltage                       | 150 | volts |
| Grid-No.2 (Screen-Grid) Voltage     | 130 | volts |
| Plate Dissipation                   | 5.2 | watts |
| Grid-No.2 Input                     | 1.1 | watts |
| Bulb Temperature (At hottest point) | 250 | °C    |

#### TYPICAL OPERATION

|                                  |       |          |
|----------------------------------|-------|----------|
| Plate Voltage                    | 110   | volts    |
| Grid-No.2 Voltage                | 110   | volts    |
| Grid-No.1 (Control-Grid) Voltage | -7.5  | volts    |
| Peak AF Grid-No.1 Voltage        | 7.5   | volts    |
| Zero-Signal Plate Current        | 40    | mA       |
| Maximum-Signal Plate Current     | 41    | mA       |
| Zero-Signal Grid-No.2 Current    | 3     | mA       |
| Maximum-Signal Grid-No.2 Current | 7     | mA       |
| Plate Resistance (Approx.)       | 13000 | ohms     |
| Transconductance                 | 5800  | μmhos    |
| Load Resistance                  | 2500  | ohms     |
| Total Harmonic Distortion        | 10    | per cent |
| Maximum-Signal Power Output      | 1.5   | watts    |

#### MAXIMUM CIRCUIT VALUES

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |


### Installation and Application

The 35-volt heater is designed to operate under the normal conditions of line-voltage variation without materially affecting the performance or serviceability of the 35C5. For operation of the 35C5 in series with other types having 0.15-ampere rating, the current in the heater circuit should be adjusted to 0.15 ampere for the normal supply voltage.



In a series-heater circuit of the "dc-power line" type employing several 0.15-ampere types and one or two 35C5s, the heater(s) of the 35C5(s) should be placed on the positive side of the line. Under these conditions, heater-cathode voltage of the 35C5 must not exceed the value given under maximum ratings. In a series-heater circuit of the "universal" type employing rectifier tube 35W4, one or two 35C5s and several 0.15-ampere types, it is recommended that the heater(s) of the 35C5(s) be placed in the circuit so that the higher values of heater-cathode bias will be impressed on the 35C5(s) rather than on the other 0.15-ampere types. This is accomplished by arranging the 35C5(s) on the side of the supply line which is connected to the cathode of the rectifier, i.e., the positive terminal of the rectified voltage supply. Between this side of the line and the 35C5(s), any necessary auxiliary resistance and the heater of the 35W4 are connected in series.

As a power amplifier (class A<sub>1</sub>), the 35C5 is recommended for use either singly or in push-pull combination in the power-output stage of ac/dc receivers. The operating values shown under typical operation have been determined on the basis that grid-No.1 current does not flow during any part of the input cycle.

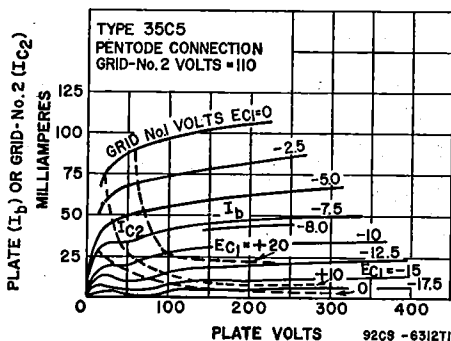

Refer to chart at end of section.

**35DZ8**

Refer to chart at end of section.

**35EH5**

Refer to chart at end of section.


**35GL6**

Refer to chart at end of section.

**35L6GT**

Refer to type 6LR6.

**35LR6**



**HALF-WAVE  
VACUUM RECTIFIER**

**35W4**

Miniature type used in power supply of ac/dc receivers. Outlines section, 5D; requires miniature 7-contact socket. This type is equivalent in performance to glass-octal type 35Z5GT. The heater is provided with a tap for operation of a panel lamp.

|   |      |          |        |
|---|------|----------|--------|
| Heater Voltage (ac/dc):                 | *    | **       |        |
| Entire Heater (pins 3 and 4) .....      | 35   | 32       | volts  |
| Panel Lamp Section (pins 4 and 6) ..... | 7.5  | 5.5      | volts  |
| Heater Current:                         |      |          |        |
| Between Pins 3 and 4 .....              | 0.15 | —        | ampere |
| Between Pins 3 and 6 .....              | —    | 0.15     | ampere |
| Peak Heater-Cathode Voltage .....       |      | ±360 max | volts  |

\* Without panel lamp.

\*\* With No.40 or No.47 panel lamp.

### Half-Wave Rectifier


#### MAXIMUM RATINGS (Design-Maximum Values)

|  |     |     |     |       |
|--|-----|-----|-----|-------|
| Peak Inverse Plate Voltage .....                     |     | 360 |     | volts |
| Peak Plate Current .....                             |     | 660 |     | mA    |
| Average Output Current:                              |     |     |     |       |
| With Panel Lamp and { No Shunting Resistor .....     |     | 66  |     | mA    |
| { Shunting Resistor .....                            |     | 100 |     | mA    |
| Without Panel Lamp .....                             |     | 110 |     | mA    |
| Panel-Lamp-Section Voltage:                          |     |     |     |       |
| When Panel Lamp Fails .....                          |     | 17  |     | volts |
| AC Plate-Supply Voltage (rms) .....                  | 117 | 117 | 117 | 117   |
| Filter-Input Capacitor .....                         | 40  | 40  | 40  | 40    |
| Minimum Total Effective Plate-Supply Impedance ..... | 15  | 15  | 15  | 15    |
| Panel-Lamp Shunting Resistor .....                   | —   | 300 | 150 | 100   |
| Average Output Current .....                         | 60  | 70  | 80  | 90    |

† No.40 or No.47 panel lamp used in circuit given below with capacitor-input filter.


### Installation and Application

#### OPERATION CHARACTERISTICS HALF-WAVE RECTIFIER

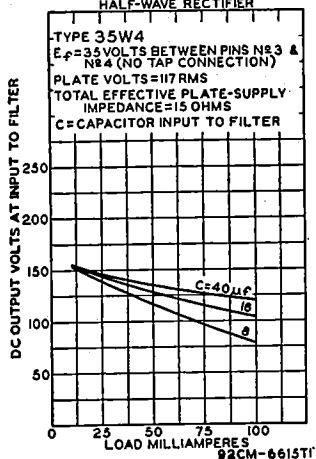

For heater considerations, refer to miniature type 35C5.

With the panel lamp connected as shown in the diagram, the drop across R and all heaters (with panel lamp) should equal 117 volts at 0.15 ampere. The shunting resistor  $R_s$  is required when dc output current exceeds 60 milliamperes. Values of  $R_s$  for dc output currents greater than 60 milliamperes are given in tabulated data.

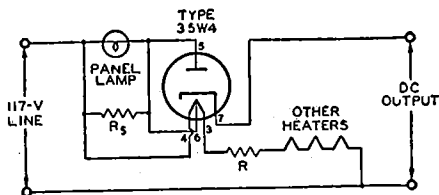

#### TYPICAL OPERATION WITHOUT PANEL LAMP

|  |     |         |
|--|-----|---------|
| AC Plate-Supply Voltage (rms) .....                  | 117 | volts   |
| Filter-Input Capacitor .....                         | 40  | $\mu$ F |
| Minimum Total Effective Plate-Supply Impedance ..... | 15  | ohms    |
| Average Output Current .....                         | 100 | mA      |
| DC Output Voltage at Input to Filter (Approx.):      |     |         |
| At half-load current (50 mA) .....                   | 135 | volts   |
| At full-load current (100 mA) .....                  | 120 | volts   |
| Voltage Regulation (Approx.):                        |     |         |
| Half-load to full-load current .....                 | 15  | volts   |

#### MAXIMUM CIRCUIT VALUES

|  |     |      |
|--|-----|------|
| Panel-Lamp Shunting Resistor:*         |     |      |
| For dc output current of { 70 mA ..... | 800 | ohms |
| { 80 mA .....                          | 400 | ohms |
| { 90 mA .....                          | 250 | ohms |

\* Required when dc output current is greater than 60 milliamperes.

Refer to chart at end of section.


**35Y4**

Refer to chart at end of section.

**35Z3**

Refer to chart at end of section.

**35Z4GT**



**HALF-WAVE  
VACUUM RECTIFIER**

**35Z5GT**

Glass octal type used in power supply of ac/dc receivers. The heater is provided with a tap for operation of a panel lamp. Outlines section, 13D; requires octal socket. This type may be supplied with pin No.1 omitted. For installation and application considerations, refer to miniature type 35W4.

|   |      |          |        |
|---|------|----------|--------|
| Heater Voltage (ac/dc):                 | *    | **       |        |
| Entire Heater (pins 2 and 7) .....      | 35   | 32       | volts  |
| Panel Lamp Section (pins 2 and 3) ..... | 7.5  | 5.5      | volts  |
| Heater Current:                         |      |          |        |
| Between Pins 2 and 7 .....              | 0.15 | —        | ampere |
| Between Pins 3 and 7 .....              | —    | 0.15     | ampere |
| Peak Heater-Cathode Voltage .....       |      | ±350 max | volts  |

\* Without panel lamp.

\*\* With No.40 or No.47 panel lamp.

**Half-Wave Rectifier**

**MAXIMUM RATINGS (Design-Center Values)**

|  |     |       |
|--|-----|-------|
| Peak Inverse Plate Voltage .....                 | 700 | volts |
| Peak Plate Current .....                         | 600 | mA    |
| Average Output Current:                          |     |       |
| With Panel Lamp and { No Shunting Resistor ..... | 60  | mA    |
| { Shunting Resistor .....                        | 90  | mA    |
| Without Panel Lamp .....                         | 100 | mA    |
| Panel-Lamp-Section Voltage (rms):                |     |       |
| When Panel Lamp Fails .....                      | 15  | volts |

**TYPICAL OPERATION WITH PANEL LAMP†**

|  |     |     |     |     |     |       |
|--|-----|-----|-----|-----|-----|-------|
| AC Plate-Supply Voltage (rms) ....                   | 117 | 117 | 117 | 117 | 235 | volts |
| Filter-Input Capacitor .....                         | 40  | 40  | 40  | 40  | 40  | μF    |
| Minimum Total Effective Plate-Supply Impedance ..... | 15  | 15  | 15  | 15  | 100 | ohms  |
| Panel-Lamp Shunting Resistor .....                   | —   | 300 | 150 | 100 | —   | ohms  |
| Average Output Current .....                         | 60  | 70  | 80  | 90  | 60  | mA    |

† No.40 or No.47 panel lamp used in circuit with capacitor-input filter given under type 35W4.

**TYPICAL OPERATION WITHOUT PANEL LAMP†**

|   |     |     |       |
|---|-----|-----|-------|
| AC Plate-Supply Voltage (rms) .....               | 117 | 235 | volts |
| Filter-Input Capacitor .....                      | 40  | 40  | μF    |
| Minimum Total Effective Plate-Supply Impedance .. | 15  | 100 | ohms  |
| Average Output Current .....                      | 100 | 100 | mA    |
| DC Output Voltage at Input to Filter (Approx.):   |     |     |       |
| At half-load current (50 mA) .....                | 140 | 230 | volts |
| At full-load current (100 mA) .....               | 120 | 235 | volts |
| Voltage Regulator (Approx.):                      |     |     |       |
| Half-load to full-load current .....              | 20  | 45  | volts |

**MAXIMUM CIRCUIT VALUES**

**Panel-Lamp Shunting Resistor\*:**

|  |     |      |
|--|-----|------|
| For dc output current of { 70 mA ..... | 800 | ohms |
| { 80 mA .....                          | 400 | ohms |
| { 90 mA .....                          | 250 | ohms |

\* Required when dc output current is greater than 60 milliamperes.

Refer to chart at end of section.


**36**

Refer to chart at end of section.

**36AM3  
36AM3A  
36AM3B**

Refer to type 6KD6.

**36KD6/40KD6**



9QL

## BEAM POWER TUBE

36MC6



Novar type used for horizontal-deflection amplifier in color television receivers. Outlines section, 18D; requires novar 9-contact socket.

|   |          |        |
|---|----------|--------|
| Heater Voltage (ac/dc)                                | 36       | volts  |
| Heater Current  | 0.45     | ampere |
| Heater-Cathode Voltage:                               |          |        |
| Peak value  | ±200 max | volts  |
| Average value   | 100 max  | volts  |
| Direct Interelectrode Capacitances:                   |          |        |
| Grid No.1 to Plate                                    | 1.0      | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2 and Grid No.3 | 40       | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3    | 16       | pF     |

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|   | Triode† Connection |      | Pentode Connection |       |       |
|---|--------------------|------|--------------------|-------|-------|
|   | 175                | —    | 45                 | 60    |       |
| Plate Voltage                               | —                  | —    | —                  | —     | volts |
| Peak Positive-Pulse Plate Voltage#          | —                  | 5000 | —                  | —     | volts |
| Grid No.3 (Suppressor Grid)                 | —                  | 30   | 30                 | 30    | volts |
| Grid-No.2 (Screen-Grid) Voltage             | 175                | 110  | 110                | 110   | volts |
| Grid-No.1 (Control-Grid) Voltage            | -21                | —    | 0                  | 0     | -21   |
| Amplification Factor                        | 4                  | —    | —                  | —     | —     |
| Plate Resistance (Approx.)                  | —                  | —    | —                  | —     | 6000  |
| Transconductance                            | —                  | —    | —                  | —     | 14000 |
| Plate Current                               | —                  | —    | 1100††             | 750†† | 125   |
| Grid-No.2 Current                           | —                  | —    | 110††              | 42††  | 3.3   |
| Grid-No.1 Voltage for plate current of 1 mA | —                  | -125 | —                  | —     | -40   |
|   |                    |      |                    |       | volts |

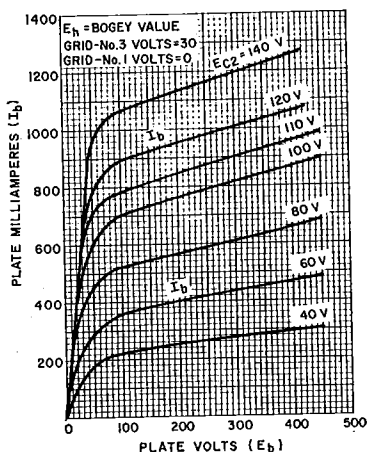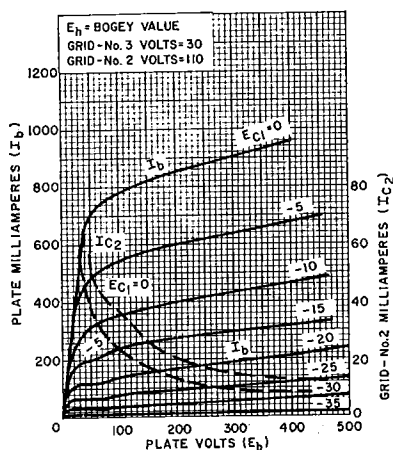

## Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

## MAXIMUM RATINGS (Design-Maximum Values)

|                                    |      |       |
|------------------------------------|------|-------|
| DC Plate Supply Voltage            | 990  | volts |
| Peak Positive-Pulse Plate Voltage# | 7500 | volts |
| Peak Negative-Pulse Plate Voltage  | 1100 | volts |
| DC Grid-No.3 Voltage <sup>■</sup>  | 75   | volts |
| DC Grid-No.2 Voltage               | 250  | volts |

|   |      |       |
|---|------|-------|
| Peak Negative-Pulse Grid-No.1 Voltage ..... | 330  | volts |
| Peak Cathode Current .....                  | 1400 | mA    |
| Average Cathode Current .....               | 400  | mA    |
| Grid-No.2 Input .....                       | 5    | watts |
| Plate Dissipation■ .....                    | 38   | watts |
| Bulb Temperature (At hottest point) .....   | 250  | °C    |

**MAXIMUM CIRCUIT VALUES**

|                                    |      |         |
|------------------------------------|------|---------|
| Grid-No.1-Circuit Resistance:      |      |         |
| For cathode-bias operation .....   | 1    | megohm  |
| For grid-leak-bias operation ..... | 10   | megohms |
| For fixed-bias operation .....     | 0.47 | megohm  |

# Pulse duration must not exceed 15% of one horizontal scanning cycle (10 microseconds).

† Grid No.2 connected to plate.


†† This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

■ In this service, a positive value may be applied to grid No.3 to minimize "snivets" interference; a typical value for this voltage is 30 volts.

■ A bias resistor or other means is required to protect the tube in absence of excitation.

Refer to chart at end of section. **37**

Refer to chart at end of section. **38**



**12FS**

**DIODE—BEAM POWER TUBE 38HE7**

Duodec type used in television receiver applications. The diode unit is used for damper service and the beam power unit for horizontal-deflection amplifier service. Outlines section, 15D; requires duodec 12-contact socket. Heater: volts (ac/dc), 37.8; amperes, 0.45; warm-up time, 11 seconds; maximum heater-cathode volts, ±200 peak, 100 average.

**Beam Power Unit As Class A<sub>1</sub> Amplifier**

| CHARACTERISTICS   | Pentode Connection |     | Triode** Connection |     |       |
|---|--------------------|-----|---------------------|-----|-------|
|   | 5000               | 130 | 130                 | 130 |       |
| Plate Voltage .....   | 5000               | 130 | 130                 | 130 | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                       | 130                | 130 | 130                 | 130 | volts |
| Grid-No.1 (Control-Grid) Voltage .....                      | —                  | 0   | —22                 | —22 | volts |
| Plate Resistance (Approx.) .....                            | —                  | —   | 6200                | —   | ohms  |
| Transconductance .....                                      | —                  | —   | 8800                | —   | μmhos |
| Plate Current .....   | —                  | 450 | 60                  | —   | mA    |
| Grid-No.2 Current .....                                     | —                  | 40  | 2.8                 | —   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA ..... | —80                | —   | —39                 | —   | volts |
| Amplification Factor .....                                  | —                  | —   | —                   | 4.2 |       |

\*\* Grid No.2 tied to plate.

**Beam Power Unit as Horizontal-Deflection Amplifier**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Ratings)**

|   |      |       |
|---|------|-------|
| Plate Voltage .....                             | 500  | volts |
| Peak Positive-Pulse Plate Voltage# .....        | 5000 | volts |
| Peak Negative-Pulse Plate Voltage .....         | 0    | volts |
| Grid-No.2 Voltage .....                         | 150  | volts |
| DC Grid-No.1 Voltage, Negative-bias value ..... | 55   | volts |
| Peak Negative-Pulse Grid-No.1 Voltage .....     | 330  | volts |
| Average Cathode Current .....                   | 230  | mA    |
| Peak Cathode Current .....                      | 800  | mA    |
| Plate Dissipation† .....                        | 10   | watts |
| Grid-No.2 Input .....                           | 3.5  | watts |

**MAXIMUM CIRCUIT VALUE**

|                                    |   |        |
|------------------------------------|---|--------|
| Grid-No.1-Circuit Resistance ..... | 1 | megohm |
|------------------------------------|---|--------|

† A bias resistor or other means is required to protect the tube in absence of excitation.

### Damper Service—Diode Unit

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                     |      |       |
|-------------------------------------|------|-------|
| Peak Inverse Plate Voltage#         | 4200 | volts |
| Peak Plate Current                  | 1200 | mA    |
| Average Plate Current               | 200  | mA    |
| Heater-Cathode Voltage:             |      |       |
| Peak value                          | +200 | volts |
| Average value                       | +100 | volts |
| Bulb Temperature (at hottest point) | 200  | °C    |

#### CHARACTERISTICS, Instantaneous Value

|   |    |       |
|---|----|-------|
| Tube Voltage Drop for plate current of 350 mA | 21 | volts |
|---|----|-------|


# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).

## 38HK7

53HK7

### DIODE—BEAM POWER TUBE

Duodecar type used in television receiver applications. The diode unit is used for damper service and the beam power unit for horizontal-deflection amplifier service. Outlines section, 15D; requires duodecar 12-contact socket. Type 53HK7 is identical with 38HK7 except for heater ratings.



12FS

|  |               |               |         |
|--|---------------|---------------|---------|
| Heater Voltage (ac/dc)                                 | 38HK7<br>37.8 | 53HK7<br>53.2 | volts   |
| Heater Current   | 0.45          | 0.315         | ampere  |
| Heater Warm-up Time (Average)                          | 11            | 11            | seconds |
| Heater-Cathode Voltage:                                |               |               |         |
| Peak value   | ±200 max      | ±200 max      | volt    |
| Average value  | 100 max       | 100 max       | volts   |
| Direct Interelectrode Capacitances (Approx.):          |               |               |         |
| Diode Unit:  |               |               |         |
| Plate to Cathode and Heater                            |               | 10            | pF      |
| Cathode to Plate and Heater                            |               | 9             | pF      |
| Heater to Cathode                                      |               | 2             | pF      |
| Beam Power Unit:                                       |               |               |         |
| Grid No.1 to Plate                                     |               | 0.38          | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 |               | 19            | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     |               | 8             | pF      |

#### Beam Power Unit as Class A<sub>1</sub> Amplifier

| CHARACTERISTICS                                       | Triode** Connection |      | Pentode Connection |      |       |
|---|---------------------|------|--------------------|------|-------|
|   | 130                 | 3500 | 50                 | 130  |       |
| Plate Voltage   | 130                 | 3500 | 50                 | 130  | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 130                 | 130  | 130                | 130  | volts |
| Grid-No.1 (Control-Grid) Voltage                      | -22                 | —    | 0                  | -22  | volts |
| Amplification Factor                                  | 4.2                 | —    | —                  | —    |       |
| Plate Resistance                                      | —                   | —    | —                  | 6200 | ohms  |
| Transconductance                                      | —                   | —    | —                  | 8800 | μmhos |
| Plate Current   | —                   | —    | 450                | 60   | mA    |
| Grid-No.2 Current                                     | —                   | —    | 40                 | 2.8  | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 1 mA | —                   | -66  | —                  | -39  | volts |

#### MAXIMUM CIRCUIT VALUE

|                              |   |        |
|------------------------------|---|--------|
| Grid-No.1-Circuit Resistance | 1 | megohm |
|------------------------------|---|--------|

\*\* Grid No.2 tied to plate.

#### Beam Power Unit as Horizontal-Deflection Amplifier

For operation in a 525-line, 30-frame system

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |      |       |
|---|------|-------|
| Plate Voltage                             | 500  | volts |
| Peak Positive-Pulse Plate Voltage         | 5000 | volts |
| Peak Negative-Pulse Plate Voltage         | 0    | volts |
| Grid-No.2 Voltage                         | 150  | volts |
| DC Grid-No.1 Voltage, Negative-bias value | 55   | volts |
| Peak Negative-Pulse Grid-No.1 Voltage     | 330  | volts |
| Average Cathode Current                   | 230  | mA    |
| Peak Cathode Current                      | 800  | mA    |
| Plate Dissipation†                        | 10   | watts |
| Grid-No.2 Input                           | 3.5  | watts |

**MAXIMUM CIRCUIT VALUE**

Grid-No.1-Circuit Resistance ..... 1 megohm  
 † A bias resistor or other means is required to protect the tube in absence of excitation.

**Damper Service—Diode Unit**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| Peak Inverse Plate Voltage# .....         | 4200 | volts |
| Peak Plate Current .....                  | 1200 | mA    |
| Average Plate Current .....               | 200  | mA    |
| <b>Heater-Cathode Voltage:</b>            |      |       |
| Peak value .....                          | +200 | -3700 |
| Average value .....                       | +100 | -500  |
| Bulb Temperature (At hottest point) ..... | 200  | °C    |

**CHARACTERISTIC, Instantaneous Value**

Tube Voltage Drop for plate current of 350 mA ..... 16 volts

# Pulse duration must not exceed 15% of a horizontal scanning cycle (10 microseconds).


|                                       |                     |
|---------------------------------------|---------------------|
| Refer to chart at end of section.     | <b>39/44</b>        |
| Refer to chart at end of section.     | <b>40</b>           |
| Refer to chart at end of section.     | <b>40KD6</b>        |
| For replacement use type 36KD6/40KD6. | <b>40KG6A/PL509</b> |
| Refer to type 6KG6A/EL509.            | <b>41</b>           |
| Refer to chart at end of section.     | <b>42</b>           |
| Refer to chart at end of section.     | <b>42EC4A/PY500</b> |
| Refer to type 6KN6.                   | <b>42KN6</b>        |
| Refer to chart at end of section.     | <b>43</b>           |
| Refer to chart at end of section.     | <b>45</b>           |
| Refer to chart at end of section.     | <b>45Z3</b>         |
| Refer to chart at end of section.     | <b>45Z5GT</b>       |
| Refer to chart at end of section.     | <b>46</b>           |
| Refer to chart at end of section.     | <b>47</b>           |
| Refer to chart at end of section.     | <b>48</b>           |
| Refer to chart at end of section.     | <b>49</b>           |
| Refer to chart at end of section.     | <b>50</b>           |
| Refer to chart at end of section.     | <b>50A5</b>         |
| Refer to chart at end of section.     | <b>50B5</b>         |
| Refer to type 6BM8/ECL82.             | <b>50BM8/UCL82</b>  |

# 50C5

25C5

## BEAM POWER TUBE

Miniature type used in output stage of compact, ac/dc radio receivers. Outlines section, 5D; requires miniature 7-contact socket. This tube, like other power-handling tubes, should be adequately ventilated. Within its maximum ratings, type 50C5 is equivalent in performance to glass octal type 50L6GT. Type 25C5 is identical with type 50C5 except for heater ratings.



|  |                   |                    |                 |
|--|-------------------|--------------------|-----------------|
| Heater Voltage (ac/dc)                                 | 25C5<br>25<br>0.3 | 50C5<br>50<br>0.15 | volts<br>ampere |
| Heater Current   |                   |                    |                 |
| Heater-Cathode Voltage:                                |                   |                    |                 |
| Peak value   | ±200 max          | ±200 max           | volts           |
| Average value  | 100 max           | 100 max            | volts           |
| Direct Interelectrode Capacitances (Approx.):          |                   |                    |                 |
| Grid No.1 to Plate                                     |                   | 0.6                | pF              |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 |                   | 13                 | pF              |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     |                   | 8.5                | pF              |


### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage   | 150 | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 130 | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0   | volts |
| Plate Dissipation                                     | 7   | watts |
| Grid-No.2 Input                                       | 1.4 | watts |
| Bulb Temperature (At hottest point)                   | 220 | °C    |

#### TYPICAL OPERATION

|                                  |     |       |
|----------------------------------|-----|-------|
| Plate Voltage                    | 120 | volts |
| Grid-No.2 Voltage                | 110 | volts |
| Grid-No.1 (Control-Grid) Voltage | -8  | volts |

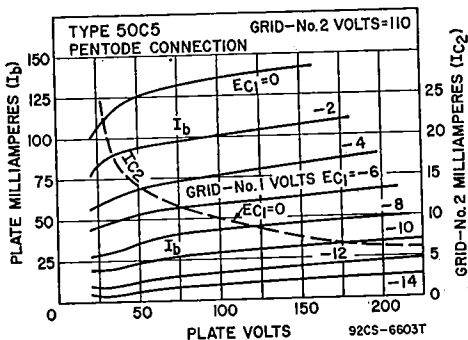

|                                  |       |          |
|----------------------------------|-------|----------|
| Peak AF Grid-No.1 Voltage        | 8     | volts    |
| Zero-Signal Plate Current        | 49    | mA       |
| Maximum-Signal Plate Current     | 50    | mA       |
| Zero-Signal Grid-No.2 Current    | 4     | mA       |
| Maximum-Signal Grid-No.2 Current | 8.5   | mA       |
| Plate Resistance (Approx.)       | 10000 | ohms     |
| Transconductance                 | 7500  | μmhos    |
| Load Resistance                  | 2500  | ohms     |
| Total Harmonic Distortion        | 10    | per cent |
| Maximum-Signal Power Output      | 2.3   | watts    |

#### MAXIMUM CIRCUIT VALUES

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |



Installation and Application

The 50-volt heater is designed to operate under the normal conditions of line voltage variation without materially affecting the performance or serviceability of the 50C5. For operation of the 50C5 in series with other types having 0.15-ampere rating, the current in the heater circuit should be adjusted to 0.15 ampere for the normal supply voltage.

In a series-heater circuit of the "dc power line" type employing several 0.15-ampere types and one or two 50C5s, the heater(s) of the 50C5(s) should be placed on the positive side of the line. Under these conditions, heater-cathode voltage of the 50C5 must not exceed the value given under maximum ratings. In a series-heater circuit of the "universal" type employing rectifier tube 35W4, one or two 50C5s, and several 0.15-ampere types, it is recommended that the heater(s) of the 50C5(s) be placed in the circuit so that the higher values of heater-cathode bias will be impressed on the 50C5(s) rather than on the other 0.15-ampere types. This is accomplished by arranging the 50C5(s) on the side of the supply line which is connected to the cathode of the rectifier, i.e., the positive terminal of the rectified voltage supply. Between this side of the line and the 50C5(s), any necessary auxiliary resistance and the heater of the 35W4 are connected in series.

As a power amplifier (class A<sub>1</sub>), the 50C5 is recommended for use either singly or in push-pull combination in the power-output stage of "ac/dc" receivers. The operating values shown under typical operation have been determined on the basis that grid-No. 1 current does not flow during any part of the input cycle.

Refer to chart at end of section. **50C6G**

Refer to chart at end of section. **50DC4**

Refer to type 6EH5. **50EH5**

Refer to chart at end of section. **50FE5**


Refer to chart at end of section. **50FK5**

Refer to type 33GY7A. **50GY7A**

Refer to chart at end of section **50HC6**

POWER PENTODE

**50HK6**



Miniature type used in audio-frequency power-output stage of radio receivers. Outlines section, 5D; requires miniature 7-contact socket. The heater is provided with a tap for operation of a panel lamp. Heater: volts (ac/dc), 50; amperes, 0.15; tap volts (without panel lamp), 7; maximum heater-cathode volts, ±200 peak, 100 average.

Class A<sub>1</sub> Amplifier

|  |     |       |
|--|-----|-------|
| <b>MAXIMUM RATINGS (Design-Maximum Values)</b>     |     |       |
| Plate Voltage .....                                | 150 | volts |
| Grid-No.2 (Screen-Grid) Voltage .....              | 130 | volts |
| Plate Dissipation .....                            | 5.5 | watts |
| Grid-No.2 Input .....                              | 1.1 | watts |
| RMS Heater-Tap Voltage When Panel Lamp Falls ..... | 14  | volts |

**TYPICAL OPERATION AND CHARACTERISTICS**

|                                     |       |          |
|-------------------------------------|-------|----------|
| Plate Voltage                       | 110   | volts    |
| Grid-No.2 Voltage                   | 110   | volts    |
| Grid-No.1 (Control-Grid) Voltage    | -7.5  | volts    |
| Peak AF Grid-No.1 Voltage           | 7.5   | volts    |
| Zero-Signal Plate Current           | 49    | mA       |
| Maximum-Signal Plate Current        | 50    | mA       |
| Zero-Signal Grid-No.2 Current       | 4     | mA       |
| Maximum-Signal Grid-No.2 Current    | 8.5   | mA       |
| Plate Resistance (Approx.)          | 10000 | ohms     |
| Transconductance                    | 7500  | μmhos    |
| Load Resistance                     | 2500  | ohms     |
| Total Harmonic Distortion (Approx.) | 9     | per cent |
| Maximum-Signal Power Output         | 1.9   | watts    |

**MAXIMUM CIRCUIT VALUES**

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |

**50JY6**


Refer to chart at end of section.

**50L6GT**

25L6GT

**BEAM POWER TUBE**

Glass octal type used in output stage of ac/dc radio receivers. Outlines section, 13D; requires octal socket. This type may be supplied with pin No.1 omitted. Refer to miniature type 50C5 for installation and application information. Type 25L6GT is identical with type 50L6GT except for heater ratings.



**TAC**

|  |               |               |        |
|--|---------------|---------------|--------|
|  | <b>25L6GT</b> | <b>50L6GT</b> |        |
| Heater Voltage (ac/dc)                                 | 25            | 50            | volts  |
| Heater Current   | 0.3           | 0.15          | ampere |
| Peak Heater-Cathode Voltage                            | ±90 max       | ±90 max       | volts  |
| Direct Interelectrode Capacitances (Approx.):          |               |               |        |
| Grid No.1 to Plate                                     |               | 0.6           | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 |               | 15            | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     |               | 9.5           | pF     |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Center Values)**

|                                 |      |       |
|---------------------------------|------|-------|
| Plate Voltage                   | 200  | volts |
| Grid-No.2 (Screen-Grid) Voltage | 125  | volts |
| Plate Dissipation               | 10   | watts |
| Grid-No.2 Input                 | 1.25 | watts |

**TYPICAL OPERATION**

|                                  |                   |                     |          |
|----------------------------------|-------------------|---------------------|----------|
|                                  | <b>Fixed Bias</b> | <b>Cathode Bias</b> |          |
| Plate Supply Voltage             | 110               | 200                 | volts    |
| Grid-No.2 Supply Voltage         | 110               | 125                 | volts    |
| Grid-No.1 (Control-Grid) Voltage | -7.5              | —                   | volts    |
| Peak AF Grid-No.1 Voltage        | 7.5               | 8.0                 | volts    |
| Cathode-Bias Resistor            | —                 | 180                 | ohms     |
| Zero-Signal Plate Current        | 49                | 46                  | mA       |
| Maximum-Signal Plate Current     | 50                | 47                  | mA       |
| Zero-Signal Grid-No.2 Current    | 4                 | 2.2                 | mA       |
| Maximum-Signal Grid-No.2 Current | 10                | 8.5                 | mA       |
| Plate Resistance (Approx.)       | 13000             | 23000               | ohms     |
| Transconductance                 | 8000              | 8000                | μmhos    |
| Load Resistance                  | 2000              | 4000                | ohms     |
| Total Harmonic Distortion        | 10                | 10                  | per cent |
| Maximum-Signal Power Output      | 2.1               | 3.8                 | watts    |

**50X6**

Refer to chart at end of section.


**50Y6GT**

Refer to chart at end of section.

|                                   |                     |
|-----------------------------------|---------------------|
| Refer to chart at end of section. | <b>50Y7GT</b>       |
| Refer to chart at end of section. | <b>50Z7G</b>        |
| Refer to chart at end of section. | <b>53</b>           |
| Refer to type 38HK7.              | <b>53HK7</b>        |
| Refer to type 12FX5.              | <b>60FX5</b>        |
| Refer to chart at end of section. | <b>70L7GT</b>       |
| Refer to chart at end of section. | <b>75</b>           |
| Refer to chart at end of section. | <b>78</b>           |
| Refer to chart at end of section. | <b>80</b>           |
| Refer to chart at end of section. | <b>83</b>           |
| Refer to chart at end of section. | <b>84/6Z4</b>       |
| Refer to chart at end of section. | <b>117L7GT/M7GT</b> |
| Refer to chart at end of section. | <b>117N7GT</b>      |
| Refer to chart at end of section. | <b>117P7GT</b>      |
| Refer to chart at end of section. | <b>117Z3</b>        |
| Refer to chart at end of section. | <b>117Z4GT</b>      |
| Refer to chart at end of section. | <b>117Z6GT</b>      |
| Refer to chart at end of section. | <b>407A</b>         |
| Refer to chart at end of section. | <b>408A</b>         |
| Refer to chart at end of section. | <b>884</b>          |
| Refer to chart at end of section. | <b>955</b>          |
| Refer to chart at end of section. | <b>959</b>          |
| Refer to chart at end of section. | <b>991</b>          |
| Refer to chart at end of section. | <b>1612</b>         |
| Refer to chart at end of section. | <b>1614</b>         |
| Refer to chart at end of section. | <b>1619</b>         |
| Refer to chart at end of section. | <b>1620</b>         |
| Refer to chart at end of section. | <b>1621</b>         |
| Refer to chart at end of section. | <b>1622</b>         |
| Refer to chart at end of section. | <b>1629</b>         |
| Refer to chart at end of section. | <b>1635</b>         |

**2050****INDUSTRIAL  
TYPE****GAS THYRATRON**


Glass octal type gas tetrode thyatron for use in relay and grid-controlled-rectifier service. Outlines section, 22; requires octal socket. For maximum ratings and typical operating conditions refer to type 2050A.

**6BS**

|   |          |             |          |        |
|---|----------|-------------|----------|--------|
| Heater Voltage (ac/dc)                        | Min. 5.7 | Average 6.3 | Max. 6.9 | volts  |
| Heater Current                                | 0.54     | 0.60        | 0.66     | ampere |
| Cathode:                                      |          |             |          |        |
| Heating Time, prior to tube conduction        | 10       | —           | —        | sec    |
| Direct Interelectrode Capacitances (Approx.): |          |             |          |        |
| Grid No. 1 to Anode                           |          |             | 0.26     | pF     |
| Input   |          |             | 4.2      | pF     |
| Output  |          |             | 3.6      | pF     |

**2050A****INDUSTRIAL  
TYPE****GAS THYRATRON**

Glass octal type gas tetrode thyatron for use in relay and grid-controlled-rectifier service. Outlines section, 13C; requires octal socket.

**6BS**

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc)   | 6.3 ±10% | volts   |
| Heater Current   | 0.6      | ampere  |
| Peak Heater-Cathode Voltage:   |          |         |
| Heater negative with respect to cathode  | 100 max  | volts   |
| Heater positive with respect to cathode  | 25 max   | volts   |
| Cathode:   |          |         |
| Minimum heating time prior to tube conduction  | 10       | seconds |
| Direct Interelectrode Capacitances (Approx.):  |          |         |
| Grid No. 1 to anode  | 0.15     | pF      |
| Grid No. 1 to cathode and grid No. 2   | 2.2      | pF      |
| Ionization Time (Approx.):   |          |         |
| For dc anode volts = 100, grid-No. 1 volts (square-wave pulse) = 50, peak anode amperes during conduction = 1                                    | 0.5      | μs      |
| Deionization Time (Approx.):   |          |         |
| With dc anode volts = 125, grid-No. 1 volts = -250, grid-No. 1 resistor (ohms) = 1000, dc anode amperes = 0.1                                    | 50       | μs      |
| With dc anode volts = 125, grid-No. 1 volts = -10, grid-No. 1 resistor (ohms) = 1000, dc anode amperes = 0.1                                     | 100      | μs      |
| Maximum Critical Grid-No. 1 Current for dc anode supply volts (rms) = 460, average anode amperes = 0.1   | 0.5      | μA      |
| Anode Voltage Drop (Approx.)   | 8        | volts   |
| Grid-No. 1 Control Ratio (Approx.) for grid-No. 1 resistor (ohms) = 0, grid No. 2 connected to cathode at socket                                 | 250      |         |
| Grid-No. 2 Control Ratio (Approx.) for grid-No. 1 resistor (ohms) = 0, grid-No. 2 resistor (ohms) = 0, grid No. 1 connected to cathode at socket | 800      |         |

**Relay and Grid-Controlled Rectifier Service**

For anode supply frequency of 60 Hz

**MAXIMUM RATINGS (Absolute-Maximum Values)**

|   |      |      |         |
|---|------|------|---------|
| Peak Anode Voltage:                       |      |      |         |
| Forward                                   | 180  | 650  | volts   |
| Inverse                                   | 360  | 1300 | volts   |
| Grid-No. 2 (Shield-Grid) Voltage:         |      |      |         |
| Peak, before tube conduction              | -100 | -100 | volts   |
| Average*, during tube conduction          | -10  | -10  | volts   |
| Grid-No. 1 (Control-Grid) Voltage:        |      |      |         |
| Peak, before tube conduction              | -250 | -250 | volts   |
| Average*, during tube conduction          | -10  | -10  | volts   |
| Cathode Current:                          |      |      |         |
| Peak                                      | 1    | 1    | ampere  |
| Average*                                  | 0.2  | 0.1  | ampere  |
| Fault, for duration of 0.1 second maximum | 10   | 10   | amperes |

|                           |       |            |            |
|---------------------------|-------|------------|------------|
| Grid-No. 2 Current:       |       |            |            |
| Average*                  | ..... | +0.01      | +0.01      |
| Grid-No. 1 Current:       |       |            |            |
| Average*                  | ..... | +0.01      | +0.01      |
| Ambient-Temperature Range | ..... | -75 to +90 | -75 to +90 |
|                           |       |            | ampere     |
|                           |       |            | ampere     |
|                           |       |            | °C         |

**TYPICAL OPERATION FOR RELAY SERVICE**

|  |       |      |                                |        |
|--|-------|------|--------------------------------|--------|
| RMS Anode Voltage                        | ..... | 117  | 400                            | volts  |
| Grid No. 2                               | ..... |      | Connected to cathode at socket |        |
| RMS Grid-No. 1 Bias Voltage <sup>▲</sup> | ..... | 5    | —                              | volts  |
| DC Grid-No. 1 Voltage                    | ..... | —    | —6                             | volts  |
| Peak Grid-No. 1 Signal Voltage           | ..... | 5    | 6                              | volts  |
| Grid-No. 1 Circuit Resistance            | ..... | 1    | 1                              | megohm |
| Anode-Circuit Resistance <sup>†</sup>    | ..... | 1200 | 2000                           | ohms   |

**MAXIMUM CIRCUIT VALUES**

|  |       |    |         |
|--|-------|----|---------|
| Grid-No. 1-Circuit Resistance:             |       |    |         |
| For average anode current below 0.1 ampere | ..... | 10 | megohms |
| For average anode current above 0.1 ampere | ..... | 2  | megohms |

\* Averaged over any interval of 30 seconds maximum.

▲ Approximately 180° out of phase with the anode voltage.


† Sufficient resistance, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings.

**Operating Considerations**

The heater is designed to operate on either ac or dc at 6.3 volts. Regardless of the heater-voltage supply used the heater voltage must never be allowed to deviate from its rated range. Heater operation outside of this voltage range will impair tube performance and may cause tube failure. Low heater voltage causes low cathode temperature with resultant cathode sputtering and consequent destruction of the cathode; high heater voltage causes high cathode temperature with resultant heating of the grid and consequent grid emission which produces unpredictable shifts in the critical grid-No. 1 voltage for conduction.

The cathode should be allowed to reach normal operating temperature before anode current is drawn. The delay period should not be less than 10 seconds after application of heater voltage. Unless this recommendation is followed, the cathode will be damaged.

**OPERATING RANGE OF CRITICAL GRID No.1 VOLTAGE**

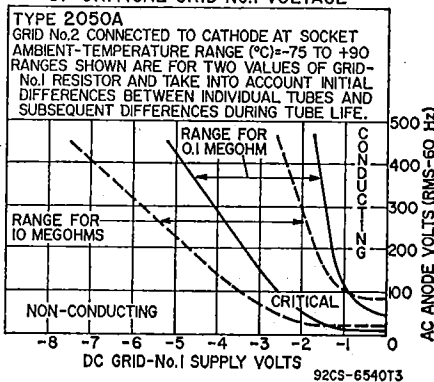

The shield grid (grid No. 2) is normally connected to the cathode at socket. It may, however, be used as a control electrode because the control characteristic of grid No. 1 may be shifted by varying the potential of grid

No. 2. As grid No. 2 is made negative, the grid-No. 1 characteristic is shifted in the positive direction. The use of grid No. 2 as the control electrode (with grid No. 1 connected to cathode at socket) has the advantage of increased sensitivity but consideration must be given to the higher pre-conduction current, higher capacitance to anode, and less stability of operation.

A grid-No. 1 resistor having a value as high as 10 megohms to give circuit sensitivity can be used with the 2050-A because its control-grid current is very low. However, when a high value of grid resistor is used, care should be taken to keep the tube base and socket clean and dry in order to make the effect of leakage currents between the control-grid base pin and anode base pin very small.

Sufficient anode-circuit resistance, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings of the tube.


|                   |                                   |
|-------------------|-----------------------------------|
| <b>2081/6AW8A</b> | Refer to chart at end of section. |
| <b>2082/12AY7</b> | Refer to chart at end of section. |
| <b>5636</b>       | Refer to chart at end of section. |
| <b>5639</b>       | Refer to chart at end of section. |
| <b>5642</b>       | Refer to chart at end of section. |

## 5651A

INDUSTRIAL  
TYPE

### VOLTAGE-REFERENCE TUBE

Miniature type cold-cathode, glow-discharge voltage-reference tube for use in dc power supplies. Outlines section, 5C; requires miniature 7-contact socket.



**5B0**

#### MAXIMUM RATINGS (Absolute-Maximum Values)

|   |           |    |
|---|-----------|----|
| DC Operating Current (Continuous) ..... | 3.5       | mA |
| DC Operating Current (Continuous) ..... | 1.5       | mA |
| Ambient Temperature Range .....         | -55 to 90 | °C |

#### CHARACTERISTICS AND OPERATION RANGE VALUES

|  | Min. | Av.  | Max. |          |
|--|------|------|------|----------|
| DC Starting Voltage .....  | —    | 107  | 115* | volts    |
| DC Operating Voltage (Variation from tube to tube):  |      |      |      |          |
| At 1.5 mA .....  | 83   | 85   | 87   | volts    |
| At 2.5 mA .....  | 83.5 | 85.5 | 87.5 | volts    |
| At 3.5 mA .....  | 84.5 | 86.5 | 88.5 | volts    |
| Regulation (1.5 mA to 3.5 mA) .....  | —    | —    | 3    | volts    |
| Temperature coefficient of Operating Voltage (over ambient temperature range of -55 to 90°C) ..... | —    | -4   | —    | mV/°C    |
| Percentage Variation of Operating Voltage:†  |      |      |      |          |
| During first 300 hours of life* .....  | —    | —    | 0.1  | per cent |
| During subsequent 1000 hours of life .....   | —    | —    | 0.1  | per cent |
| Short-term (100 hours)   |      |      |      |          |
| Variation of Operating Voltage after first 300 hours of life† .....                                | —    | —    | 0.05 | per cent |
| Instantaneous Voltage  |      |      |      |          |
| Fluctuation (Voltage jump)† .....  | —    | —    | 0.1  | volt     |

#### CIRCUIT VALUES

|                       |   |   |      |    |
|-----------------------|---|---|------|----|
| Shunt Capacitor ..... | — | — | 0.02 | μF |
| Series Resistor ..... | — | ‡ |      |    |

- \* A dc supply voltage of 115 volts minimum should be provided to insure "starting" throughout tube life.
- DC operating current = 2.5 mA.
- After initial 3-minute warm-up period.
- † Defined as the maximum instantaneous voltage fluctuation at any current level within the operating current range.
- ‡ A series resistor must always be used with the 5651A. The resistance value must be chosen so that (1) the maximum current rating of 3.5 mA is not exceeded at the highest anode-supply voltage employed, and (2) the minimum current rating of 1.5 mA is always exceeded when the anode-supply voltage is at its lowest value.

**Installation and Application**

Make no connection to pins 3 and 6. Any potentials applied to these pins may cause erratic tube performance. The three pin terminals for the cathode (pins 2, 4, and 7) and the two for the anode (pins 1 and 5) offer the equipment designer several different possibilities for connection of the 5651A. Any pair of interconnected pins can be used as a jumper connection to a circuit common to either the cathode or to the anode. The use of such a jumper connection provides a means for opening the circuit to protect circuit components when the 5651A is removed from its socket. Under no circumstances should the current through any pair of interconnected pins exceed one ampere.

If the load for the regulated power supply is disconnected either directly or by removing the 5651A from its socket, the rectifier capacitors will charge to the rectifier peak voltage. It is important, therefore, that these capacitors be rated to withstand such voltage.


A warm-up period of 3 minutes should be allowed each time the equipment is turned on to insure minimum voltage drift of the 5651A.

When a shunt capacitor is used with the 5651A, its value should be limited to 0.02  $\mu$ F. A large value of capacitance may cause the tube to oscillate and thus give unstable performance.

Shielding should be utilized for the 5651A to insure maximum stability when the tube is operated in the presence of strong rf or magnetic fields.

Refer to chart at end of section.

**5651WA**



**7BD**

**SHARP-CUTOFF PENTODE**

**5654**

INDUSTRIAL TYPE

Miniature type sharp-cutoff pentode used in RF and IF broad-band applications at frequencies up to 400 mHz. Outlines section, 5B; requires miniature 7-contact socket.

|  |               |        |
|--|---------------|--------|
| Heater Voltage (ac/dc) .....                 | 6.3 $\pm$ 10% | volts  |
| Heater Current .....                         | 0.175         | ampere |
| Heater-Cathode Voltage:                      |               |        |
| Peak value .....                             | $\pm$ 100     | volts  |
| Direct Interelectrode Capacitances: $\Delta$ |               |        |
| Grid No.1 to Plate .....                     | 0.020 max.    | pF     |
| Input .....                                  | 4.0           | pF     |
| Output .....                                 | 2.85          | pF     |

$\Delta$  With external shield.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Absolute-Maximum Values)**

|                                  |     |       |
|----------------------------------|-----|-------|
| Plate Voltage .....              | 200 | volts |
| Grid-No.2 (Screen) Voltage ..... | 155 | volts |

|                         |      |       |
|-------------------------|------|-------|
| Plate Dissipation ..... | 1.85 | watts |
| Grid-No.2 Input .....   | 0.55 | watt  |
| Cathode Current .....   | 20   | mA    |

**TYPICAL OPERATION AND CHARACTERISTICS**

|  |      |      |            |
|--|------|------|------------|
| Plate Voltage .....  | 120  | 180  | volts      |
| Grid-No.2 Voltage .....  | 120  | 120  | volts      |
| Cathode-Bias Resistor .....                                    | 180  | 180  | ohms       |
| Plate Resistance (Approx.) .....                               | 0.30 | 0.50 | megohm     |
| Transconductance .....   | 5000 | 5100 | $\mu$ mhos |
| Plate Current .....  | 7.5  | 7.7  | mA         |
| Grid-No.2 Current .....  | 2.5  | 2.4  | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 10 $\mu$ A .. | -8.5 | -8.5 | volts      |

**MAXIMUM CIRCUIT VALUE**

|                                    |     |        |
|------------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance ..... | 0.5 | megohm |
|------------------------------------|-----|--------|

**Special Ratings & Performance Data****SHOCK RATING**

|                           |          |   |
|---------------------------|----------|---|
| Impact Acceleration ..... | 500 max. | g |
|---------------------------|----------|---|

**FATIGUE RATING**

|                                |          |   |
|--------------------------------|----------|---|
| Vibrational Acceleration ..... | 2.5 max. | g |
|--------------------------------|----------|---|

**HEATER CYCLING LIFE PERFORMANCE**

|  |           |        |
|--|-----------|--------|
| Cycles of Intermittent Operation ..... | 2000 min. | cycles |
|--|-----------|--------|

**5654W**

Refer to chart at end of section.

**5654/6AK5W/  
6096**

Refer to chart at end of section.

**5663**

Refer to chart at end of section.

**5670**

Refer to chart at end of section.

**5670WA**

Refer to chart at end of section.

**5672**

Refer to chart at end of section.

**5678**

Refer to chart at end of section.

**5686**

Refer to chart at end of section.

**5687**

Refer to chart at end of section.

**5691**

Refer to chart at end of section.

**5692**


Refer to chart at end of section.

**5693**

Refer to chart at end of section.

**5696****INDUSTRIAL  
TYPE****THYRATRON**

Miniature type gas-tetrode thyatron for use in counter-circuit relay applications. Outlines section, 5B; requires miniature 7-contact socket.

**7BN**

|                                       |           |        |
|---------------------------------------|-----------|--------|
| Heater Voltage (ac/dc) .....          | 6.3       | volts  |
| Heater Current .....                  | 0.150     | ampere |
| Heater-Cathode Voltage:<br>Peak ..... | +25, -100 | volts  |




|  |      |         |
|--|------|---------|
| Cathode:   |      |         |
| Minimum Heating Time, prior to tube conduction .....   | 10   | seconds |
| Direct Interelectrode Capacitances (Approx.):  |      |         |
| Grid No.1 to Anode .....   | 0.03 | pF      |
| Input .....  | 1.8  | pF      |
| Output .....   | 0.54 | pF      |
| Ionization Time (Approx.):   |      |         |
| For conditions: dc anode volts = 100; grid-No.1 square-pulse volts = +50; peak cathode amperes during conduction = 0.150 .....   | 0.5  | μs      |
| Deionization Time (Approx.):   |      |         |
| For conditions: dc anode volts = 500; grid-No.1 volts = -100, grid-No.1 resistor (ohms) = 1000; dc cathode amperes = 0.025 ..... | 25   | μs      |
| For conditions: dc anode volts = 500; grid-No.1 volts = -13; grid-No.1 resistor (ohms) = 1000; dc cathode amperes = 0.025 .....  | 40   | μs      |
| Maximum Critical Grid-No.1 Current, with ac anode-supply volts (rms) = 350, and average cathode amperes = 0.025 .....            | 0.5  | μA      |
| Anode Voltage Drop (Approx.) .....   | 10   | volts   |
| Grid-No.1 Control Ratio (Approx.) with grid-No.1 resistor (meg-ohms) = 0; grid-No.2 volts = 0 .....                              | 250  |         |
| Grid-No.2 Control Ratio (Approx.) with grid-No.1 volts = 0, grid-No.2 resistor (ohms) = 0 .....                                  | 15   |         |

**Relay and Grid-Controlled Rectifier Service**

**MAXIMUM RATINGS (Absolute-Maximum Values)**

|   |            |         |
|---|------------|---------|
| Peak Anode Voltage:                                 |            |         |
| Forward .....                                       | 500        | volts   |
| Inverse .....                                       | 500        | volts   |
| Grid-No.2 (Shield-Grid) Voltage:                    |            |         |
| Peak, before anode conduction .....                 | -50        | volts   |
| Average, during anode conduction <sup>■</sup> ..... | -10        | volts   |
| Grid-No.1 (Control-Grid) Voltage:                   |            |         |
| Peak, before anode conduction .....                 | -100       | volts   |
| Average, during anode conduction <sup>■</sup> ..... | -10        | volts   |
| Cathode Current:                                    |            |         |
| Peak .....  | 100        | mA      |
| Average <sup>■</sup> .....                          | 25         | mA      |
| Surge, for duration of 0.1 sec. max. ....           | 2          | amperes |
| Grid-No.2 Current:                                  |            |         |
| Average <sup>■</sup> .....                          | 5          | mA      |
| Grid-No.1 Current:                                  |            |         |
| Average <sup>■</sup> .....                          | 5          | mA      |
| Ambient Temperature Range .....                     | -55 to +90 | °C      |

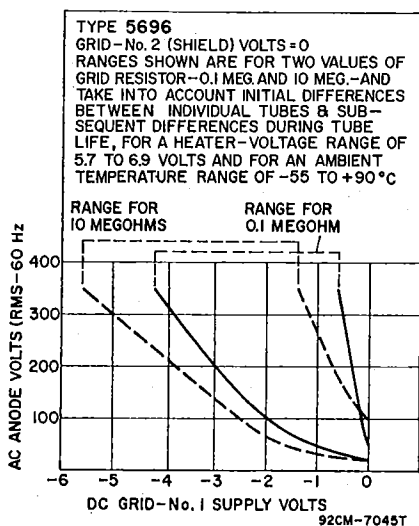

**TYPICAL OPERATING CONDITIONS FOR RELAY SERVICE**

|                                     |                      |           |
|-------------------------------------|----------------------|-----------|
| RMS Anode Voltage .....             | 117                  | volts     |
| Grid No.2 .....                     | Connected to cathode | at socket |
| RMS Grid-No.1 Bias Voltage□ .....   | 5                    | volts     |
| Peak Grid-No.1 Signal Voltage ..... | 5                    | volts     |
| Grid-No.1-Circuit Resistance .....  | 0.1                  | megohm    |
| Anode-Circuit Resistance# .....     | 5000                 | ohms      |

**MAXIMUM CIRCUIT VALUE**

|                                    |    |         |
|------------------------------------|----|---------|
| Grid-No.1-Circuit Resistance ..... | 10 | megohms |
|------------------------------------|----|---------|

■ Averaged over any interval of 30 sec. max.

□ Approximately 180° out of phase with the anode voltage.

# Sufficient resistance, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings.

**5696A** Refer to chart at end of section.

**5718** Refer to chart at end of section.

**5719** Refer to chart at end of section.

**5725** Refer to chart at end of section.

**5725/6AS6W** Refer to chart at end of section.

**5726** Refer to chart at end of section.

**5726/6AL5W** Refer to chart at end of section.


**5726/6AL5W/6097** Refer to chart at end of section.

**5727**

**INDUSTRIAL TYPE**

**GAS THYRATRON**

Miniature type "Premium" gas-tetrode thyatron for use in relay, grid-controlled rectifier and pulse-modulator applications. Outlines section, 5C; requires miniature 7-contact socket.



**7BN**

|  |          |         |
|--|----------|---------|
| Heater Voltage (ac/dc) .....   | 6.3 ±10% | volts   |
| Heater Current .....   | 0.6      | ampere  |
| Cathode:   |          |         |
| Minimum heating time prior to tube conduction .....  | 20       | seconds |
| Direct Interelectrode Capacitances (Approx.):  |          |         |
| Grid No.1 to anode .....   | 0.026    | pF      |
| Grid No.1 to cathode, grid No.2, and heater .....  | 2.4      | pF      |
| Anode to cathode, grid No.2, and heater .....  | 1.6      | pF      |
| Ionization Time (Approx.):   |          |         |
| For dc anode volts = 100, grid-No.1 volts (square-wave pulse) = 50, peak anode amperes during conduction = 0.5 .....                 | 0.5      | μs      |
| Deionization Time (Approx.):   |          |         |
| For dc anode volts = 125, dc anode amperes = 0.1, grid-No.1 resistor (ohms) = 1000, and grid-No.1 volts = -100 .....                 | 35       | μs      |
| For dc anode volts = 125, dc anode amperes = 0.1, grid-No.1 resistor (ohms) = 1000, and grid-No.1 volts = -100 .....                 | 75       | μs      |
| Maximum Critical Grid-No.1 Current:  |          |         |
| For anode-supply volts (rms) = 460, and average anode amperes = 0.1 .....  | 0.5      | μA      |
| Anode Voltage Drop (Approx.) .....   | 8        | volts   |
| Grid-No.1 Control Ratio (Approx.) with grid-No.1 resistor (megohms) = 0, grid-No.2 volts = 0 .....                                   | 250      |         |
| Grid-No.2 Control Ratio (Approx.) with grid-No.1 resistor (megohms) = 0, grid-No.2 resistor (megohms) = 0, grid-No.1 volts = 0 ..... | 1000     |         |

Relay and Grid-Controlled Rectifier Service

MAXIMUM RATINGS (Absolute-Maximum Values)

For anode-supply frequency of 60 Hz

|   |  |           |        |
|---|--|-----------|--------|
| Peak Anode Voltage:                                 |  |           |        |
| Forward   |  |           |        |
| Inverse   |  | 650       | volts  |
| Grid-No.2 (Shield-Grid) Voltage:                    |  | 1300      | volts  |
| Peak, before tube conduction                        |  | -100      | volts  |
| Average <sup>■</sup> , during tube conduction       |  | -10       | volts  |
| Grid-No.1 (Control-Grid) Voltage:                   |  |           |        |
| Peak, before tube conduction                        |  | -100      | volts  |
| Average <sup>■</sup> , during tube conduction       |  | -10       | volts  |
| Cathode Current:                                    |  |           |        |
| Peak  |  | 0.5       | ampere |
| Average <sup>■</sup>                                |  | 0.1       | ampere |
| Fault, for duration of 0.1 second max.              |  | 10        | ampere |
| Grid-No.2 Current:                                  |  |           |        |
| Average <sup>■</sup>                                |  | 10        | mA     |
| Grid-No.1 Current:                                  |  |           |        |
| Average <sup>■</sup>                                |  | 10        | mA     |
| Heater-Cathode Voltage:                             |  |           |        |
| Peak  |  | +25, -100 | volts  |
| Bulb Temperature (At hottest point on bulb surface) |  | 150       | °C     |
| Ambient Temperature                                 |  | -75       | °C     |

TYPICAL OPERATION FOR RELAY SERVICE

|   |      |      |        |
|---|------|------|--------|
| RMS Anode Voltage                       | 117  | 400  | volts  |
| Grid-No.2 Voltage                       | 0    | 0    | volts  |
| RMS Grid-No.1 Bias Voltage <sup>□</sup> | 5    | —    | volts  |
| DC Grid-No.1 Bias Voltage               | —    | -6   | volts  |
| Peak Grid-No.1 Signal Voltage           | 5    | 6    | volts  |
| Grid-No.1-Circuit Resistance            | 1    | 1    | megohm |
| Anode-Circuit Resistance <sup>#</sup>   | 1200 | 2000 | ohms   |

MAXIMUM CIRCUIT VALUE

|                              |    |         |
|------------------------------|----|---------|
| Grid-No.1-Circuit Resistance | 10 | megohms |
|------------------------------|----|---------|

Pulse-Modulated Service

For rectangular-wave shapes, duty cycle of 0.001 max., pulse duration of 5  $\mu$ s max., and pulse-repetition rate of 500 pps max.

MAXIMUM RATINGS (Absolute-Maximum Values)

|   |  |         |            |
|---|--|---------|------------|
| Peak Anode Voltage:                                 |  |         |            |
| Forward   |  | 500     | volts      |
| Inverse   |  | 100     | volts      |
| Grid-No.2 (Shield-Grid) Voltage:                    |  |         |            |
| Peak, before tube conduction                        |  | -50     | volts      |
| Average, during tube conduction                     |  | -10     | volts      |
| Grid-No.1 (Control-Grid) Voltage:                   |  |         |            |
| Peak, before tube conduction                        |  | -100    | volts      |
| Average, during tube conduction                     |  | -10     | volts      |
| Cathode Current:                                    |  |         |            |
| Peak  |  | 10      | ampere     |
| Average   |  | 10      | mA         |
| Rate of change                                      |  | 100     | A/ $\mu$ s |
| Peak Grid-No.2 Current                              |  | 20      | mA         |
| Peak Grid-No.1 Current                              |  | 20      | mA         |
| Heater-Cathode Voltage:                             |  | 20      | mA         |
| Peak  |  | $\pm$ 0 | volt       |
| Bulb Temperature (At hottest point on bulb surface) |  | 150     | °C         |
| Ambient Temperature                                 |  | -75     | °C         |

MAXIMUM CIRCUIT VALUES

|                              |              |        |
|------------------------------|--------------|--------|
| Grid-No.1-Circuit Resistance | 0.5          | megohm |
| Grid-No.2-Circuit Resistance | { 25000 max. | ohms   |
|                              | { 2000 min.  | ohms   |

\* For pulse-modulator service, tolerance is +10%, -5%.

■ Averaged over any interval of 30 seconds maximum.

□ Approximately 180° out of phase with the anode voltage.

# Sufficient resistance, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings.

## Special Ratings and Performance Data

## SHOCK RATING

Impact Acceleration ..... 750 max. g

## FATIGUE RATING

Vibrational Acceleration ..... 2.5 max. g

## HEATER-CYCLING LIFE PERFORMANCE

Cycles of Intermittent Operation ..... 2000 min. cycles

## Operating Considerations

Sufficient anode-circuit resistance, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings of the tube.

Curve shown under type 2D21 also applies to type 5727

**5734** Refer to chart at end of section.

**5749** Refer to chart at end of section.

**5749/6BA6W** Refer to chart at end of section.

**5750** Refer to chart at end of section.

**5751**INDUSTRIAL  
TYPE

## HIGH-MU TWIN TRIODE

Miniature type "Premium" high-mu twin triode used as a phase inverter and as a high gain amplifier in industrial control devices. Outlines section, 6B; requires miniature 9-contact socket.

|                              | Series    | Parallel  |        |
|------------------------------|-----------|-----------|--------|
| Heater Arrangement:          |           |           |        |
| Heater Voltage (ac/dc) ..... | 12.6 ±10% | 6.3 ±10%  | volts  |
| Heater Current .....         | 0.175     | 0.350     | ampere |
| Heater-Cathode Voltage:      |           |           |        |
| Peak .....                   |           | ±100 max. | volts  |

Class A<sub>1</sub> Amplifier (Each Unit)

## MAXIMUM RATINGS (Design-Maximum Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                                       | 330 | volts |
| Grid Voltage:   |     |       |
| Negative-bias value .....                                 | 55  | volts |
| Positive-bias value .....                                 | 0   | volt  |
| Plate Dissipation .....                                   | 0.8 | watt  |
| Bulb Temperature (At hottest point on bulb surface) ..... | 165 | °C    |


## CHARACTERISTICS

|                            |       |       |       |
|----------------------------|-------|-------|-------|
| Plate Voltage .....        | 100   | 250   | volts |
| Grid Voltage .....         | -1    | -3    | volts |
| Amplification Factor ..... | 70    | 70    |       |
| Plate Resistance .....     | 58000 | 58000 | ohms  |
| Transconductance .....     | 1200  | 1200  | μmhos |
| Plate Current .....        | 0.9   | 1.0   | mA    |

## Special Ratings &amp; Performance Data

## SHOCK RATING

Impact Acceleration ..... 600 max. g



9A

**FATIGUE RATING**


Vibrational Acceleration ..... 2.5 max. g

**LOW-FREQUENCY VIBRATION PERFORMANCE**

RMS Output Voltage ..... 100 max. mV


**HEATER-CYCLING LIFE PERFORMANCE**

Cycles of Intermittent Operation ..... 2000 min. cycles

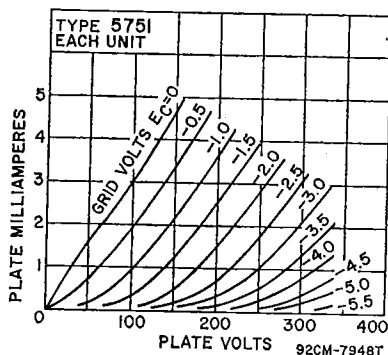

Refer to chart at end of section.

**5751WA**



**9K**

**VHF BEAM POWER TUBE**

**5763**

INDUSTRIAL TYPE

Miniature type VHF beam power amplifier for use in low-power mobile transmitters and the low-power stages of larger fixed station transmitters. Outlines section, 6E; requires miniature 9-contact socket.

|  |           |        |
|--|-----------|--------|
| Heater Voltage (ac/dc) .....                                 | 6.0 ±10%  | volts  |
| Heater Current .....   | 0.75      | ampere |
| Heater-Cathode Voltage: Peak .....                           |           |        |
| Transconductance for plate current of 45 mA .....            | ±100 max. | volts  |
| Mu-Factor, Grid No.2 to Grid No.1 .....                      | 7000      | μmhos  |
| Direct Interelectrode Capacitances: Grid No.1 to Plate ..... | 0.3 max   | pF     |
| Input .....  | 9.5       | pF     |
| Output .....   | 4.5       | pF     |

**Plate-Modulated RF Power Amplifier—Class C Telephony**

Carrier conditions per tube for use with a max. modulation factor of 1.0

|   | CCS● | ICAS●● |       |
|---|------|--------|-------|
| <b>MAXIMUM RATINGS (Absolute-Maximum Values)</b>          |      |        |       |
| DC Plate Voltage .....                                    | 250  | 300    | volts |
| DC Grid-No.3 (Suppressor) Voltage .....                   | 0    | 0      | volts |
| DC Grid-No.2 (Screen) Voltage .....                       | 250  | 250    | volts |
| DC Grid-No.1 (Control-Grid) Voltage .....                 | -125 | -125   | volts |
| DC Plate Current .....                                    | 40   | 50     | mA    |
| DC Grid-No.2 Current .....                                | 15   | 15     | mA    |
| DC Grid-No.1 Current .....                                | 5    | 5      | mA    |
| Plate Input .....   | 10   | 15     | watts |
| Grid-No.2 Input .....                                     | 1.5  | 1.5    | watts |
| Plate Dissipaton .....                                    | 8    | 12     | watts |
| Bulb Temperature (At hottest point on bulb surface) ..... | 250  | 250    | °C    |

## TYPICAL OPERATION UP TO 30 MHz

|                                |                                |                 |       |
|--------------------------------|--------------------------------|-----------------|-------|
| DC Plate Voltage               | 250                            | 300             |       |
| Grid No.3                      | Connected to cathode at socket |                 |       |
| DC Grid-No.2 Voltage†          | 250                            | 250             | volts |
| DC Grid-No.1 Voltage*          | -39                            | -42.5           | volts |
| From a grid resistor of        | 39000                          | 18000           | ohms  |
| Peak RF Grid-No.1 Voltage      | 46.5                           | 53.5            | volts |
| DC Plate Current               | 40                             | 50              | mA    |
| DC Grid-No.2 Current           | 5.6                            | 6               | mA    |
| DC Grid-No.1 Current (Approx.) | 1                              | 2.4             | mA    |
| Driving Power (Approx.)        | 0.05                           | 0.15            | watt  |
| Useful Power Output (Approx.)  | 6.4 <sup>■</sup>               | 10 <sup>■</sup> | watts |

## MAXIMUM CIRCUIT VALUE

|                              |     |     |        |
|------------------------------|-----|-----|--------|
| Grid-No.1-Circuit Resistance | 0.1 | 0.1 | megohm |
|------------------------------|-----|-----|--------|

**RF Power Amplifier & Oscillator—Class C Telegraphy<sup>□</sup>**  
**and**  
**RF Power Amplifier—Class C FM Telephony**

## MAXIMUM RATINGS (Absolute-Maximum Values)

|   | CCS <sup>●</sup> | ICAS <sup>●●</sup> |       |
|---|------------------|--------------------|-------|
| DC Plate Voltage                                    | 300              | 350                | volts |
| DC Grid-No.3 (Suppressor) Voltage                   | 0                | 0                  | volts |
| DC Grid-No.2 (Screen) Voltage                       | 250              | 250                | volts |
| DC Grid-No.1 (Control-Grid) Voltage                 | -125             | -125               | volts |
| DC Plate Current                                    | 50               | 50                 | mA    |
| DC Grid-No.2 Current                                | 15               | 15                 | mA    |
| DC Grid-No.1 Current                                | 5                | 5                  | mA    |
| Plate Input   | 15               | 17                 | watts |
| Grid-No.2 Input                                     | 2                | 2                  | watts |
| Plate Dissipation                                   | 12               | 13.5               | watts |
| Bulb Temperature (At hottest point on bulb surface) | 250              | 250                | °C    |

## TYPICAL OPERATION UP TO 30 MHz

|                                   |                                |                 |       |
|-----------------------------------|--------------------------------|-----------------|-------|
| DC Plate Voltage                  | 300                            | 350             | volts |
| Grid No.3                         | Connected to cathode at socket |                 |       |
| DC Grid-No.2 Voltage              | 250                            | 250             | volts |
| DC Grid-No.1 Voltage <sup>⊙</sup> | -28.5                          | -28.5           | volts |
| From a grid resistor of           | 18000                          | 18000           | ohms  |
| Peak RF Grid-No.1 Voltage         | 37.5                           | 37              | volts |
| DC Plate Current                  | 50                             | 48.5            | mA    |
| DC Grid-No.2 Current              | 6.6                            | 6.2             | mA    |
| DC Grid-No.1 Current (Approx.)    | 1.6                            | 1.6             | mA    |
| Driving Power (Approx.)           | 0.1                            | 0.1             | watts |
| Useful Power Output (Approx.)     | 10.3 <sup>■</sup>              | 12 <sup>■</sup> | watts |

## TYPICAL OPERATION AT 50 MHz

|                                   |                                |   |       |
|-----------------------------------|--------------------------------|---|-------|
| DC Plate Voltage                  | 300                            | — | volts |
| Grid No.3                         | Connected to cathode at socket |   |       |
| DC Grid-No.2 Voltage              | 250                            | — | volts |
| DC Grid-No.1 Voltage <sup>⊙</sup> | -60                            | — | volts |
| From a grid resistor of           | 22000                          | — | ohms  |
| Peak RF Grid-No.1 Voltage         | 80                             | — | volts |
| DC Plate Current                  | 50                             | — | mA    |
| DC Grid-No.2 Current              | 5                              | — | mA    |
| DC Grid-No.1 Current (Approx.)    | 3                              | — | mA    |
| Driving Power (Approx.)           | 0.35                           | — | watt  |
| Useful Power Output (Approx.)     | 7 <sup>■</sup>                 | — | watts |


## MAXIMUM CIRCUIT VALUE

|                              |     |     |        |
|------------------------------|-----|-----|--------|
| Grid-No.1-Circuit Resistance | 0.1 | 0.1 | megohm |
|------------------------------|-----|-----|--------|

## Frequency Multiplier

MAXIMUM CCS<sup>●</sup> RATINGS (Absolute-Maximum Values)

|   |      |       |
|---|------|-------|
| DC Plate Voltage                                    | 300  | volts |
| DC Grid-No.3 (Suppressor) Voltage                   | 0    | volts |
| DC Grid-No.2 (Screen) Voltage                       | 250  | volts |
| DC Grid-No.1 (Control-Grid) Voltage                 | -125 | volts |
| DC Plate Current                                    | 50   | mA    |
| DC Grid-No.2 Current                                | 15   | mA    |
| DC Grid-No.1 Current                                | 5    | mA    |
| Plate Input   | 15   | watts |
| Grid-No.2 Input                                     | 2    | watts |
| Plate Dissipation                                   | 12   | watts |
| Bulb Temperature (At hottest point on bulb surface) | 250  | °C    |

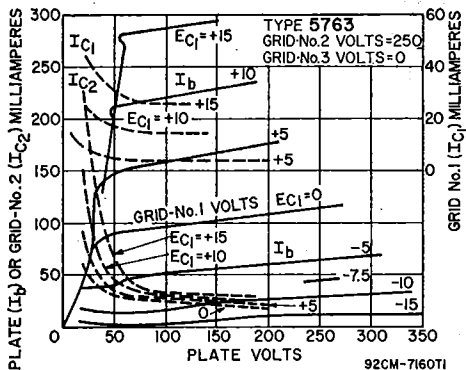

TYPICAL OPERATION

|                                   | Doubler<br>to 175 MHz | Tripler<br>to 175 MHz          |       |
|-----------------------------------|-----------------------|--------------------------------|-------|
| DC Plate Voltage                  | 300                   | 300                            | volts |
| Grid No.3                         | Connected to cathode  | Connected to cathode at socket |       |
| DC Grid-No.2 Voltage              | *                     | *                              | volts |
| DC Grid-No.1 Voltage <sup>†</sup> | -75                   | -100                           | volts |
| From grid resistor of             | 75000                 | 100000                         | ohms  |
| Peak RF Grid-No.1 Voltage         | 95                    | 120                            | volts |
| DC Plate Current                  | 40                    | 35                             | mA    |
| DC Grid-No.2 Current              | 4                     | 5                              | mA    |
| DC Grid-No.1 Current (Approx.)    | 1                     | 1                              | mA    |
| Driving Power (Approx.)           | 0.6                   | 0.6                            | watt  |
| Useful Power Output (Approx.)     | 2.1 <sup>■</sup>      | 1.3 <sup>■</sup>               | watts |

MAXIMUM CIRCUIT VALUE (For maximum rated conditions)

|                              |     |     |        |
|------------------------------|-----|-----|--------|
| Grid-No.1-Circuit Resistance | 0.1 | 0.1 | megohm |
|------------------------------|-----|-----|--------|

† Obtained preferably from a separate source modulated with the plate supply, or from the modulated plate supply through a series resistor.

\* Obtained from grid-No.1 resistor or from a combination of grid-No.1 resistor with either fixed supply or cathode resistor.

□ Key down conditions per tube without amplitude modulation. Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.

⊙ Obtained from a fixed supply, or by a grid-No.1 resistor of value shown.

■ This value of useful power is measured at load of output circuit.


● Continuous Commercial Service.

●● Intermittent Commercial and Amateur Service.

\* Obtained from plate supply of 300 volts through a series resistor of 12500 ohms.

Refer to chart at end of section.

5783



MEDIUM-MU TWIN TRIODE

5814A  
INDUSTRIAL  
TYPE

Miniature type "Premium" medium-mu twin triode used in a wide variety of applications including mixers, oscillators, multivibrators and synchronizing amplifiers in industrial control equipment. Outlines section, 6B; requires miniature 9-contact socket.

|  | Series     | Parallel   |        |
|--|------------|------------|--------|
| Heater Arrangement                           |            |            |        |
| Heater Voltage (ac/dc)                       | 12.6 ±10%  | 6.3 ±10%   | volts  |
| Heater Current                               | 0.175      | 0.350      | ampere |
| Heater-Cathode Voltage:                      |            |            |        |
| Peak value                                   | ±100 max   | ±100 max   | volts  |
| Direct Interelectrode Capacitances (Approx.) | Unit No. 1 | Unit No. 2 |        |
| Grid to Plate                                | 1.5        | 1.5        | pF     |
| Grid to Cathode and Heater                   | 1.6        | 1.6        | pF     |
| Plate to Cathode and Heater                  | 0.5        | 0.4        | pF     |

Class A<sub>1</sub> Amplifier (Each Unit Unless Otherwise Specified)

## MAXIMUM RATINGS (Design-Maximum Values)


|   |     |       |
|---|-----|-------|
| Plate Voltage .....                                       | 330 | volts |
| Cathode Current .....                                     | 22  | mA    |
| Plate Dissipation:  |     |       |
| Each Plate .....  | 3.0 | watts |
| Both Plates (Both units operating) .....                  | 6.0 | watts |
| Bulb Temperature (At hottest point on bulb surface) ..... | 165 | °C    |

## CHARACTERISTICS

|   |      |      |       |
|---|------|------|-------|
| Plate Voltage .....                                     | 100  | 250  | volts |
| Grid Voltage .....                                      | 0    | -8.5 | volts |
| Amplification Factor .....                              | 19.5 | 17   |       |
| Plate Resistance (Approx.) .....                        | 6250 | 7700 | ohms  |
| Transconductance .....                                  | 3100 | 2200 | μmhos |
| Plate Current .....                                     | 11.8 | 10.5 | mA    |
| Grid Voltage (Approx.) for plate current of 10 μA ..... | —    | -22  | volts |

## MAXIMUM CIRCUIT VALUES

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-Circuit Resistance:         |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 1    | megohm |

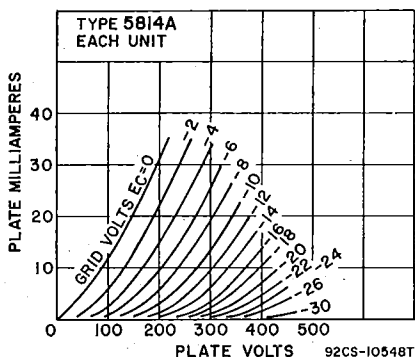


## TYPICAL OPERATION AS RESISTANCE-COUPLED AMPLIFIER

See RESISTANCE-COUPLED AMPLIFIER CHART  
type 12AU7A conditions

## Special Ratings &amp; Performance Data

|  |           |        |
|--|-----------|--------|
| <b>SHOCK RATING</b>                                      |           |        |
| Impact Acceleration .....                                | 600 max.  | g      |
| <b>FATIGUE RATING</b>                                    |           |        |
| Vibrational Acceleration .....                           | 2.5 max.  | g      |
| <b>LOW-FREQUENCY VIBRATION PERFORMANCE</b>               |           |        |
| RMS Output Voltage .....                                 | 100 max.  | mV     |
| <b>HEATER-CYCLING LIFE PERFORMANCE</b>                   |           |        |
| Cycles of Intermittent Operation .....                   | 2000 min. | cycles |
| <b>AUDIO-FREQUENCY NOISE AND MICROPHONIC PERFORMANCE</b> |           |        |
| RMS Output Voltage .....                                 | 100 max.  | mV     |





**GLOW-DISCHARGE TRIODE**

**5823**

INDUSTRIAL  
TYPE

Miniature type, cold-cathode, glow discharge triode for use primarily as a relay control tube in "on-off" low current electrical circuits. Outlines section, 5C; requires miniature 7-contact socket.

**4CK**

**MAXIMUM RATINGS<sup>A</sup>** (Absolute-Maximum Values)

For First-Quadrant Operation Only

|   |            |       |
|---|------------|-------|
| Peak Anode and Starter-Electrode Voltage:     |            |       |
| Inverse .....                                 | 200        | volts |
| Forward .....                                 | 200        | volts |
| Cathode Current:                              |            |       |
| Peak .....                                    | 100        | mA    |
| Average* .....                                | 25         | mA    |
| Peak Starter-Electrode Current:               |            |       |
| With starter-electrode voltage positive ..... | 100        | mA    |
| Ambient Temperature .....                     | -60 to +75 | °C    |

**TYPICAL OPERATING CONDITIONS**

For Relay Service with 60-Hz Supply

|   |     |       |
|---|-----|-------|
| AC Anode Supply Voltage (RMS) .....   | 117 | volts |
| AC Starter-Electrode Voltage:   |     |       |
| Max. Peak Positive Pre-Firing Voltage .....   | 70  | volts |
| Min. Peak Positive Triggering Voltage .....   | 35  | volts |
| Min. Firing Voltage (Sum of In-Phase Instantaneous Pre-Firing Voltage and Instantaneous Triggering Voltage) ..... | 105 | volts |

<sup>A</sup> These ratings apply to the 5823 when it is operated from a power supply having a frequency of 60 Hz.

\* Averaged over any interval of 15 seconds max.

Refer to chart at end of section. **5824**


Refer to chart at end of section. **5840**

Refer to chart at end of section. **5840W**

Refer to chart at end of section. **5842/417A**

Refer to chart at end of section. **5844**

Refer to chart at end of section. **5847/404A**



**9AD**

**SHARP-CUTOFF PENTODE**

**5879**

Miniature type used as audio amplifier in the input stages of medium-gain public-address systems, home sound recorders, and audio systems. Outlines section, 6B; requires miniature 9-contact socket. For operation as resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section.

|  |          |        |
|--|----------|--------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | volts  |
| Heater Current .....   | 0.15     | ampere |
| Peak Heater-Cathode Voltage .....                            | ±100 max | volts  |
| Direct Interelectrode Capacitances:                          |          |        |
| Pentode Connection:  |          |        |
| Grid No.1 to Plate .....                                     | 0.11 max | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 2.7      | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 2.4      | pF     |
| Triode Connection*:  |          |        |
| Grid No.1 to Plate .....                                     | 1.4      | pF     |
| Grid No.1 to Cathode and Heater .....                        | 1.4      | pF     |
| Plate to Cathode and Heater .....                            | 0.85     | pF     |

\* Grid No.2 and grid No.3 connected to plate.

Class A<sub>1</sub> Amplifier

| MAXIMUM RATINGS (Design-Maximum Values)          | Triode Connection* | Pentode Connection |           |
|--|--------------------|--------------------|-----------|
| Plate Voltage                                    | 275                | 330                | volts     |
| Grid-No.2 (Screen-Grid) Voltage                  | —                  | See curve page 300 | 300 volts |
| Grid-No.2 Supply Voltage                         | —                  | 330                | volts     |
| Grid-No.1 (Control-Grid) Voltage:                |                    |                    |           |
| Negative-bias value                              | 55                 | 55                 | volts     |
| Positive-bias value                              | 0                  | 0                  | volts     |
| Plate Dissipation                                | 1.7                | 1.25               | watts     |
| Grid-No.2 Input:                                 |                    |                    |           |
| For grid-No.2 voltages up to 165 volts           | —                  | 0.25               | watt      |
| For grid-No.2 voltages between 165 and 300 volts | —                  | See curve page 300 |           |



## CHARACTERISTICS

|  |       |        |                                |         |
|--|-------|--------|--------------------------------|---------|
| Plate Voltage  | 100   | 250    | 250                            | volts   |
| Grid No.3  | —     | —      | Connected to cathode at socket |         |
| Grid-No.2 Voltage                                      | —     | —      | 100                            | volts   |
| Grid-No.1 Voltage                                      | -3    | -8     | -3                             | volts   |
| Amplification Factor                                   | 21    | 21     | —                              |         |
| Plate Resistance (Approx.)                             | 0.017 | 0.0137 | 2                              | megohms |
| Transconductance                                       | 1240  | 1530   | 1000                           | μmhos   |
| Plate Current  | 2.2   | 5.5    | 1.8                            | mA      |
| Grid-No.2 Current                                      | —     | —      | 0.4                            | mA      |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | —     | —      | -8                             | volts   |

## MAXIMUM CIRCUIT VALUE

|                              |     |         |
|------------------------------|-----|---------|
| Grid-No.1-Circuit Resistance | 2.2 | megohms |
|------------------------------|-----|---------|

\* Grid No.2 and grid No.3 connected to plate.

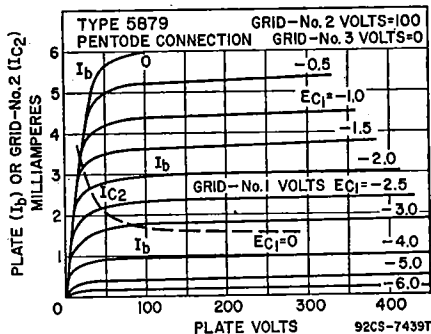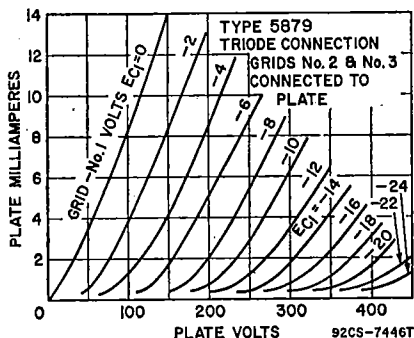

5881

Refer to chart at end of section.

5896

Refer to chart at end of section.

5899

Refer to chart at end of section.

5902

Refer to chart at end of section.

5915


Refer to chart at end of section.

5963

INDUSTRIAL  
TYPE

## MEDIUM-MU TWIN TRIODE

Miniature type medium-mu twin triode used for "on-off" control applications involving long periods of operation under cutoff conditions. Outlines section, 6B; requires miniature 9-contact socket.



9A

|   |            |            |        |
|---|------------|------------|--------|
| Heater Arrangement                            | Series     | Parallel   |        |
| Heater Voltage (ac/dc)                        | 12.6 ±10%  | 6.3 ±10%   | volts  |
| Heater Current                                | 0.15       | 0.30       | ampere |
| Heater-Cathode Voltage:                       |            |            |        |
| Peak value                                    | ±90 max.   | ±90 max.   | volts  |
| Direct Interelectrode Capacitances (Approx.): |            |            |        |
|   | Unit No. 1 | Unit No. 2 |        |
| Grid to Plate                                 | 1.5        | 1.5        | pF     |
| Grid to Cathode and Heater                    | 1.9        | 1.9        | pF     |
| Plate to Cathode and Heater                   | 0.5        | 0.35       | pF     |
| Grid of Unit No.1 to grid of Unit No.2        |            | 0.1 max.   | pF     |

**Frequency Divider in Computer Service  
and "On-Off" Control Service**  
Values are for Each Unit

**MAXIMUM RATINGS (Absolute-Maximum Values)**

|   |          |       |
|---|----------|-------|
| Plate Voltage                                       | 250      | volts |
| Grid Voltage:                                       |          |       |
| Negative bias value                                 | 100      | volts |
| Positive bias value                                 | 0        | volt  |
| Peak negative value                                 | 200      | volts |
| Plate Dissipation                                   | 2.5      | watts |
| Grid Input  | 0.5      | watt  |
| Cathode Current:                                    | 100      | mA    |
| Peak  | 20       | mA    |
| DC  | ±90 max. | volts |
| Bulb Temperature (At hottest point on bulb surface) | 120      | °C    |

**TYPICAL OPERATION AS FREQUENCY HALFER**

|                          |                  |                     |       |
|--------------------------|------------------|---------------------|-------|
|                          | Cutoff Condition | Zero-Bias Condition |       |
| Plate-Supply Voltage     | 150              | 150                 | volts |
| Grid Voltage             | -15              | 0                   | volts |
| Plate-Circuit Resistance | 20000            | 20000               | ohms  |
| Grid-Circuit Resistance  | 47000            | 47000               | ohms  |
| Plate Current            | 0                | 5.1                 | mA    |

**MAXIMUM CIRCUIT VALUES**

|                            |     |        |
|----------------------------|-----|--------|
| Grid-Circuit Resistance:   |     |        |
| For fixed-bias operation   | 0.5 | megohm |
| For cathode-bias operation | 1   | megohm |


**Class A<sub>1</sub> Amplifier (Each Unit)**

**CHARACTERISTICS**

|                            |      |       |
|----------------------------|------|-------|
| Plate Voltage              | 67.5 | volts |
| Grid Voltage               | 0    | volts |
| Amplification Factor       | 21   |       |
| Plate Resistance (Approx.) | 6600 | ohms  |
| Transconductance           | 3200 | μmhos |
| Plate Current              | 8.5  | mA    |

Refer to chart at end of section.

**5964**



**9A**

**MEDIUM-MU TWIN TRIODE**

**5965**

INDUSTRIAL  
TYPE

Miniature type medium-mu twin triode used for "on-off" control applications involving long periods of operation under cutoff conditions. Outlines section, 6B; requires miniature 9-contact socket.

|                         |           |           |        |
|-------------------------|-----------|-----------|--------|
| Heater Arrangement      | Series    | Parallel  |        |
| Heater Voltage (ac/dc)  | 12.6 ±10% | 6.3 ±10%  | volts  |
| Heater Current          | 0.225     | 0.45      | ampere |
| Heater-Cathode Voltage: |           |           |        |
| Peak value              | ±200 max. | ±200 max. | volts  |
| Average value           | ±100 max. | ±100 max. | volts  |

| Direct Interelectrode Capacitances (Approx.) | Unit No. 1 | Unit No. 2 |    |
|--|------------|------------|----|
| Grid to Plate                                | 3.0        | 3.0        | pF |
| Grid to Cathode and Heater                   | 3.8        | 3.8        | pF |
| Plate to Cathode and Heater                  | 0.5        | 0.38       | pF |
| Plate of Unit No.1 to plate of Unit No.2     | 0.5        |            | pF |

### Frequency Divider in Computer Service and "On-Off" Control Service

Values are for Each Unit

| MAXIMUM RATINGS (Absolute-Maximum Values)           |      |       |
|---|------|-------|
| Plate Voltage                                       | 330  | volts |
| Grid Voltage:                                       |      |       |
| Negative bias value                                 | 150  | volts |
| Plate Dissipation                                   | 2.4  | watts |
| Total for both units                                | 4.4  | watts |
| DC Cathode Current                                  | 16.5 | mA    |
| Bulb Temperature (At hottest point on bulb surface) | 165  | °C    |

### TYPICAL OPERATION IN COMPUTER SERVICE

|  | Cutoff Condition | Conduction Condition |       |
|--|------------------|----------------------|-------|
| Plate Supply Voltage   | 150              | 150                  | volts |
| Plate Load Resistor  | 7200             | 7200                 | ohms  |
| Plate Current  | —                | 10.5                 | mA    |
| Grid Voltage (Approx.) for grid current of 140 $\mu$ A                               | —                | less than 1          | volt  |
| Grid Voltage (Approx.) for plate current of 150 $\mu$ A                              | -5.5             | —                    | volts |
| Difference in Grid Voltage Between Units (For plate current of 150 $\mu$ A per unit) | 1.5              | —                    | volts |

### MAXIMUM CIRCUIT VALUES

|                            |     |        |
|----------------------------|-----|--------|
| Grid-Circuit Resistance:   |     |        |
| For fixed-bias operation   | 0.1 | megohm |
| For cathode-bias operation | 0.5 | megohm |

### Class A<sub>1</sub> Amplifier (Each Unit)

| CHARACTERISTICS   |      |            |
|---|------|------------|
| Plate Supply Voltage                                    | 150  | volts      |
| Cathode-Bias Resistor                                   | 220  | ohms       |
| Amplification Factor                                    | 47   |            |
| Plate Resistance  | 7250 | ohms       |
| Transconductance  | 6500 | $\mu$ mhos |
| Plate Current   | 8.2  | mA         |
| Grid Voltage (Approx.) for plate current of 150 $\mu$ A | -5.5 | volts      |

**6005**

Refer to chart at end of section.

**6005/6AQ5W**

Refer to chart at end of section.

**6005/6AQ5W/  
6095**


Refer to chart at end of section.

**6012**

INDUSTRIAL  
TYPE

### GAS THYRATRON

Glass octal negative-control gas-tetrode thyatron for use in relay and grid-controlled rectifier applications. Outlines section, 36; requires octal socket.



**600**

|   |          |                |          |         |
|---|----------|----------------|----------|---------|
| Heater Voltage (ac/dc)                        | Min. 5.7 | Av. 6.3        | Max. 6.9 | volts   |
| Heater Current                                | —        | 2.6            | 2.85     | amperes |
| Heater-Cathode Voltage:                       |          |                |          |         |
| Peak  |          | +25, -100 max. |          | volts   |
| Cathode:                                      |          |                |          |         |
| Minimum heating time prior to tube conduction |          | 30             |          | seconds |
| Maximum outage time without reheating         |          | 5              |          | seconds |
| Direct Interelectrode Capacitances (Approx.): |          |                |          |         |
| Grid No.1 to Anode                            |          | 0.23           |          | pF      |
| Grid No.1 to Cathode, Grid No.2, and Heater   |          | 5.8            |          | pF      |
| Anode to Cathode, Grid No.2, and Heater       |          | 3.9            |          | pF      |

Ionization Time (Approx.):

For conditions: dc anode volts = 100, grid-No.2 volts = 0, grid-No.1 square-pulse volts = +50, and peak anode amperes during conduction = 5

0.5

$\mu$ s  
See Table I

Deionization Time (Approx.)

Maximum Critical Grid-No.1 Current:

For conditions: ac anode-supply volts = 460 (rms), and average anode amperes = 0.5

3

$\mu$ A  
volts

Anode Voltage Drop (Approx.)

10

Grid-No.1 Control Ratio (Approx.):

For conditions: grid-No.1 resistor (megohms) = 0, grid-No.2 resistor (megohms) = 0, and grid-No.2 volts = 0

150

Grid-No.2 Control Ratio (Approx.):

For conditions: grid-No.1 resistor (megohms) = 0, grid-No.2 resistor (megohms) = 0, and grid-No. volts = 0

650

Relay and Grid-Controlled Rectifier Service

For Anode-Supply Frequency of 60 Hz

MAXIMUM RATINGS (Absolute-Maximum Values)

Peak Anode Voltage:

Forward

650

volts

Inverse

1300

volts

Grid-No.2 (Shield-Grid) Voltage:

Peak, before tube conduction

-100

volts

Average#, during tube conduction

-10

volts

Grid-No.1 (Control-Grid) Voltage:

Peak, before tube conduction

-200

volts

Average#, during tube conduction

-10

volts

Cathode Current:

Peak

5

amperes

Average#

0.5

ampere

Fault, for duration of 0.1 second max.

20

amperes

Average Grid-No.2 Current#

+0.05

ampere

Average Grid-No.1 Current#

+0.05

ampere

Ambient-Temperature Range

-75 to +90

$^{\circ}$ C

MAXIMUM CIRCUIT VALUE

Grid-No.1-Circuit Resistance

2

megohms

# Averaged over any interval of 30 seconds maximum.

OPERATIONAL RANGE OF CRITICAL GRID-No.1 VOLTAGE

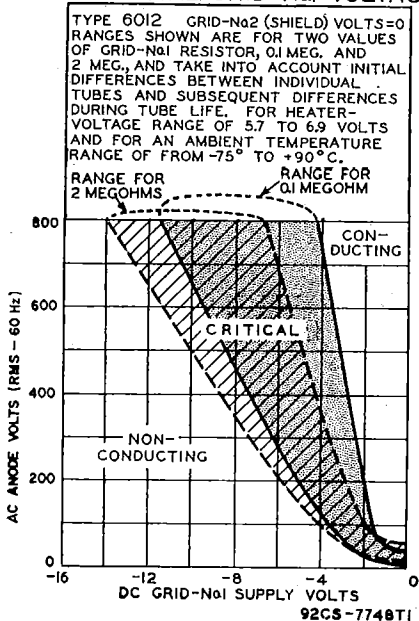


Table 1

| DC Anode Volts       | 125 |     | 250  |      | $R_{\mu 1}$<br>M $\Omega$ | $E_{CC1}$<br>volts | $R_{R2}^*$<br>ohms | $E_{CC2}$<br>volts |
|----------------------|-----|-----|------|------|---------------------------|--------------------|--------------------|--------------------|
|                      | 0.5 | 1.0 | 0.5  | 1.0  |                           |                    |                    |                    |
| DEIONIZATION<br>TIME | 175 | 225 | 250  | 275  | 0.001                     | -13                | 1000               | 0                  |
|                      | 350 | 375 | 450  | 475  | 0.1                       |                    |                    |                    |
|                      | 650 | 700 | 1100 | 1200 | 2                         |                    |                    |                    |
| $\mu$ S<br>(Approx.) | 100 | 125 | 100  | 125  | 0.001                     | -100               | 1000               | 0                  |
|                      | 125 | 150 | 150  | 175  | 0.1                       |                    |                    |                    |
|                      | 250 | 275 | 275  | 300  | 2                         |                    |                    |                    |

\* Series resistor between grid No.2 and cathode.

|                 |                                   |
|-----------------|-----------------------------------|
| <b>6021</b>     | Refer to chart at end of section. |
| <b>6072</b>     | Refer to chart at end of section. |
| <b>6072A</b>    | Refer to chart at end of section. |
| <b>6073</b>     | Refer to chart at end of section. |
| <b>6073/OA2</b> | Refer to chart at end of section. |
| <b>6074</b>     | Refer to chart at end of section. |
| <b>6074/OB2</b> | Refer to chart at end of section. |

**6080**INDUSTRIAL  
TYPE**LOW-MU  
TWIN POWER TRIODE**

Glass octal type used as a regulator tube in dc power supply units and in projection television booster scanning applications. Outlines section, 36; requires octal socket.


|  |                |         |
|--|----------------|---------|
| Heater Voltage .....                           | 6.3 $\pm$ 10%  | volts   |
| Heater Current .....                           | 2.5            | amperes |
| Heater-Cathode Voltage:#<br>Peak .....         | $\pm$ 300 max. | volts   |
| Direct Interelectrode Capacitances (Approx.)   |                |         |
| Grid to Plate (each unit) .....                | 8              | pF      |
| Input (each unit) .....                        | 6              | pF      |
| Output (each unit) .....                       | 2.2            | pF      |
| Heater to Cathode (each unit) .....            | 11             | pF      |
| Grid of Unit No.1 to Grid of Unit No.2 .....   | 0.5            | pF      |
| Plate of Unit No.1 to Plate of Unit No.2 ..... | 2              | pF      |

**Class A<sub>1</sub> Amplifier (Each Unit)****CHARACTERISTICS**

|                             |      |            |
|-----------------------------|------|------------|
| Plate-Supply Voltage .....  | 135  | volts      |
| Cathode-Bias Resistor ..... | 250  | ohms       |
| Amplification Factor .....  | 2    |            |
| Plate Resistance .....      | 280  | ohms       |
| Transconductance .....      | 7000 | $\mu$ mhos |
| Plate Current .....         | 125  | mA         |

**DC Amplifier (Each Unit)****MAXIMUM RATINGS (Absolute-Maximum Values)**

|   |     |              |
|---|-----|--------------|
| Plate Voltage .....                                       | 250 | volts        |
| Plate Current .....                                       | 125 | mA           |
| Plate Dissipation .....                                   | 13  | watts        |
| Bulb Temperature (At hottest point on bulb surface) ..... | 200 | $^{\circ}$ C |

**8BD**6.3  $\pm$ 10% volts  
2.5 amperes $\pm$ 300 max. volts

8 pF

6 pF

2.2 pF

11 pF

0.5 pF

2 pF

**MAXIMUM CIRCUIT VALUES**

|  |     |        |
|--|-----|--------|
| Grid-Circuit Resistance:                       |     |        |
| For cathode-bias operation                     | 1   | megohm |
| For fixed-bias operation <sup>□</sup>          | 0.1 | megohm |
| For combined fixed and cathode-bias operation* | 0.1 | megohm |

**Booster Scanning Service (Each Unit)**

**MAXIMUM RATINGS (Absolute-Maximum Values)**

For operation in a 525-line, 30-frame system

|  |      |       |
|--|------|-------|
| Peak Negative-Pulse Plate Voltage <sup>●</sup> | 3000 | volts |
| Peak Negative-Pulse Grid Voltage               | 2300 | volts |
| DC Plate Current                               | 125  | mA    |
| Plate Dissipation                              | 13   | watts |

**MAXIMUM CIRCUIT VALUES (For maximum rated conditions)**

|                            |   |                 |
|----------------------------|---|-----------------|
| Grid-Circuit Resistance:   |   |                 |
| For cathode-bias operation | 1 | megohm          |
| For fixed-bias operation   |   | not recommended |

<sup>□</sup> When fixed bias is used, the plate circuit should contain a protective resistance to provide a minimum drop of 15 volts dc at the normal operating conditions.

\* When combined fixed- and cathode-bias is used, the cathode-bias portion should have a minimum value of 7.5 volts dc at the normal operating conditions.

<sup>●</sup> Pulse duration must not exceed 15 per cent of one horizontal scanning cycle (10 microseconds).

# Operation of this tube is not recommended with a damper pulse between heater and cathode.

**Special Ratings & Performance Data**

**SHOCK RATING**


|                     |          |   |
|---------------------|----------|---|
| Impact Acceleration | 450 max. | g |
|---------------------|----------|---|

**FATIGUE RATING**

|                          |          |   |
|--------------------------|----------|---|
| Vibrational Acceleration | 2.5 max. | g |
|--------------------------|----------|---|

**LOW-FREQUENCY VIBRATION PERFORMANCE**

|                    |          |    |
|--------------------|----------|----|
| RMS Output Voltage | 200 max. | mV |
|--------------------|----------|----|

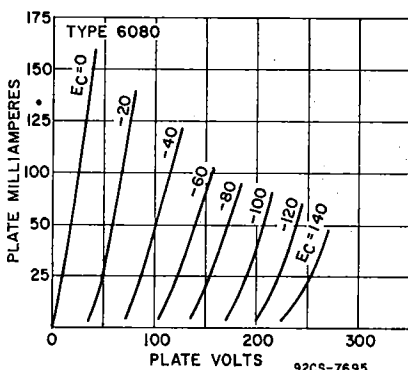

Refer to chart at end of section.

**6080WA**

Refer to chart at end of section.

**6082**

Refer to chart at end of section.

**6101**

Refer to chart at end of section.

**6101/6J6WA**


Refer to chart at end of section.

**6111**

|                    |                                   |
|--------------------|-----------------------------------|
| <b>6112</b>        | Refer to chart at end of section. |
| <b>6136</b>        | Refer to chart at end of section. |
| <b>6186</b>        | Refer to chart at end of section. |
| <b>6186/6AG5WA</b> | Refer to chart at end of section. |
| <b>6186W</b>       | Refer to chart at end of section. |
| <b>6189</b>        | Refer to chart at end of section. |
| <b>6197</b>        | Refer to chart at end of section. |

**6201****INDUSTRIAL  
TYPE****HIGH-MU TWIN TRIODE**

Miniature type used in mixer, oscillator, and amplifier applications at frequencies up to 300 MHz. Outlines section, 6B; requires miniature 9-contact socket. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section, type 12AT7 conditions.

**9A**

|   | <b>Series</b> | <b>Parallel</b> |        |
|---|---------------|-----------------|--------|
| Heater Arrangement:                           |               |                 |        |
| Heater Voltage (ac/dc) .....                  | 12.6          | 6.3             | volts  |
| Heater Current .....                          | 0.15          | 0.3             | ampere |
| Peak Heater-Cathode Voltage .....             |               | ±100 max.       | volts  |
| Direct Interelectrode Capacitances (Approx.): |               |                 |        |
| Grid-Drive Operation:                         |               |                 |        |
| Grid to Plate (Each unit) .....               |               | 1.6             | pF     |
| Grid to Cathode and Heater (Each unit) .....  |               | 2.5             | pF     |
| Plate to Cathode and Heater:                  |               |                 |        |
| Unit No.1 .....                               |               | 0.45            | pF     |
| Unit No.2 .....                               |               | 0.38            | pF     |
| Heater to Cathode (Each unit) .....           |               | 2.8             | pF     |
| Cathode-Drive Operation:                      |               |                 |        |
| Cathode to Plate (Unit No.1) .....            |               | 0.2             | pF     |
| Cathode to Plate (Unit No.2) .....            |               | 0.24            | pF     |
| Cathode to Grid and Heater (Each unit) .....  |               | 5               | pF     |
| Plate to Grid and Heater (Unit No.1) .....    |               | 1.9             | pF     |
| Plate to Grid and Heater (Unit No.2) .....    |               | 1.8             | pF     |

**Class A<sub>1</sub> Amplifier (Each Unit)****MAXIMUM RATINGS (Absolute-Maximum Values)**

|   |      |       |
|---|------|-------|
| Plate Voltage .....                                       | 330  | volts |
| Grid Voltage:   |      |       |
| Negative bias value .....                                 | 55   | volts |
| Positive bias value .....                                 | 0    | volt  |
| Plate Dissipation .....                                   | 2.75 | watts |
| Bulb Temperature (At hottest point on bulb surface) ..... | 180  | °C    |


**MAXIMUM CIRCUIT VALUES**

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-Circuit Resistance:         |      |        |
| For fixed-bias operation .....   | 0.25 | megohm |
| For cathode-bias operation ..... | 1.0  | megohm |

**CHARACTERISTICS**

|  |       |       |       |
|--|-------|-------|-------|
| Plate Supply Voltage .....                           | 100   | 250   | volts |
| Cathode-Bias Resistor .....                          | 270   | 200   | ohms  |
| Amplification Factor .....                           | 57    | 60    |       |
| Plate Resistance (Approx.) .....                     | 14300 | 10900 | ohms  |
| Transconductance .....                               | 4000  | 5500  | μmhos |
| Grid Voltage (Approx.) for plate current of 10 μA .. | -5    | -12   | volts |
| Plate Current .....                                  | 3.3   | 10    | mA    |




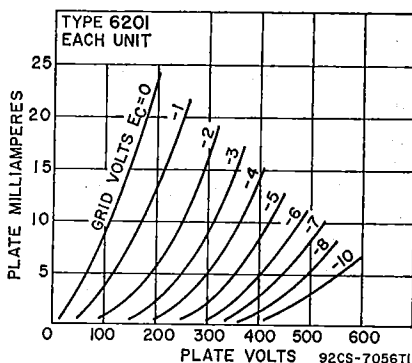

Special Ratings & Performance Data

|  |           |        |
|--|-----------|--------|
| <b>SHOCK RATING</b>                                      |           |        |
| Impact Acceleration .....                                | 600 max.  | g      |
| <b>FATIGUE RATING</b>                                    |           |        |
| Vibrational Acceleration .....                           | 2.5 max.  | g      |
| <b>LOW-FREQUENCY VIBRATION PERFORMANCE</b>               |           |        |
| RMS Output Voltage .....                                 | 100 max.  | mV     |
| <b>HEATER-CYCLING LIFE PERFORMANCE</b>                   |           |        |
| Cycles of Intermittent Operation .....                   | 2000 min. | cycles |
| <b>AUDIO-FREQUENCY NOISE AND MICROPHONIC PERFORMANCE</b> |           |        |
| RMS Output Voltage .....                                 | 100 max.  | mV     |

- Refer to chart at end of section. **6202**
- Refer to chart at end of section. **6206**
- Refer to chart at end of section. **6211**
- Refer to chart at end of section. **6336A**
- Refer to chart at end of section. **6350**
- Refer to chart at end of section. **6360**  
**6360A**
- Refer to chart at end of section. **6386**
- Refer to chart at end of section. **6417**
- Refer to chart at end of section. **6485**



7S

BEAM POWER TUBE

**6550**  
INDUSTRIAL  
TYPE

Glass octal type used in the output stages of high-fidelity audio amplifiers. Outlines section, 27C; requires octal socket. This tube should be adequately ventilated.

|   |           |         |
|---|-----------|---------|
| Heater Voltage (ac/dc) .....                  | 6.3       | volts   |
| Heater Current .....                          | 1.6       | amperes |
| <b>Peak Heater-Cathode Voltage:</b>           |           |         |
| Heater negative with respect to cathode ..... | 300 max.  | volts   |
| Heater positive with respect to cathode ..... | 200* max. | volts   |

|   |      |    |
|---|------|----|
| Direct Interelectrode Capacitances (Approx.):                               |      |    |
| Grid No.1 to plate .....  | 0.85 | pF |
| Grid No.1 to cathode and grid No.3, grid No.2, base sleeve and heater ..... | 14.0 | pF |
| Plate to cathode & grid No.3, grid No.2, base sleeve, and heater .....      | 12.0 | pF |

**MAXIMUM CIRCUIT VALUES**

|                                  |      |        |
|----------------------------------|------|--------|
| Grid-No.1-Circuit Resistance:    |      |        |
| For fixed-bias operation .....   | 0.05 | megohm |
| For cathode-bias operation ..... | 0.25 | megohm |

**Class A<sub>1</sub> AF Power Amplifier****MAXIMUM RATINGS (Design-Center Values)**

|   |     |       |
|---|-----|-------|
| Plate Voltage .....                                       | 600 | volts |
| Grid-No.2 (Screen-Grid) Voltage .....                     | 400 | volts |
| Grid-No.1 (Control-Grid) Voltage:                         |     |       |
| Negative-bias value .....                                 | 300 | volts |
| Positive-bias value .....                                 | 0   | volt  |
| Cathode Current .....                                     | 175 | mA    |
| Grid-No.2 Input .....                                     | 6   | watts |
| Plate Dissipation .....                                   | 35  | watts |
| Bulb Temperature (At hottest point on bulb surface) ..... | 250 | °C    |

**TYPICAL OPERATION AND CHARACTERISTICS**

|                                     |       |       |       |
|-------------------------------------|-------|-------|-------|
| Plate Voltage .....                 | 250   | 400   | volts |
| Grid-No.2 Voltage .....             | 250   | 225   | volts |
| Grid-No.1 Voltage .....             | -14   | -16.5 | volts |
| Peak AF Grid-No.1 Voltage .....     | 14    | 16.5  | volts |
| Zero-Signal Plate Current .....     | 140   | 87    | mA    |
| Max.-Signal Plate Current .....     | 150   | 105   | mA    |
| Zero-Signal Grid-No.2 Current ..... | 12    | 4     | mA    |
| Max.-Signal Grid-No.2 Current ..... | 28    | 18    | mA    |
| Plate Resistance (Approx.) .....    | 12000 | 27000 | ohms  |
| Transconductance .....              | 11000 | 9000  | μmhos |
| Load Resistance .....               | 1500  | 3000  | ohms  |
| Total Harmonic Distortion .....     | 7     | 18.5  | %     |
| Max.-Signal Power Output .....      | 12.5  | 20    | watts |

**Class A<sub>1</sub> Push-Pull AF Power Amplifier****MAXIMUM RATINGS (Design-Center Values)**Same as for Class A<sub>1</sub> AF POWER AMPLIFIER**TYPICAL OPERATION AND CHARACTERISTICS**

Values are for 2 tubes

|  | Fixed Bias |      | Cathode Bias |       |
|--|------------|------|--------------|-------|
| Plate Supply Voltage .....                       | 400        | 600  | 400          | volts |
| Grid-No.2 Supply Voltage .....                   | 275        | 300  | 300          | volts |
| Grid-No.1 Voltage .....                          | -23        | -31  | —            | volts |
| Cathode Resistor .....                           | —          | —    | 140          | ohms  |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage .....     | 46         | 62   | 53           | volts |
| Zero-Signal Plate Current .....                  | 180        | 115  | 166          | mA    |
| Max.-Signal Plate Current .....                  | 270        | 273  | 190          | mA    |
| Zero-Signal Grid-No.2 Current .....              | 9          | 4    | 7.5          | mA    |
| Max.-Signal Grid-No.2 Current .....              | 44         | 41   | 39           | mA    |
| Effective Load Resistance (Plate to plate) ..... | 3500       | 5000 | 4500         | ohms  |
| Total Harmonic Distortion .....                  | 3          | 2.5  | 4            | %     |
| Max.-Signal Power Output .....                   | 55         | 100  | 41           | watts |

\* The dc component must not exceed 100 volts.

**6626/0A2WA**


Refer to chart at end of section.

**6660/6BA6**

Refer to chart at end of section.

**6661/6BH6****SHARP-CUTOFF PENTODE**INDUSTRIAL  
TYPE

Miniature type used as an rf amplifier particularly in mobile equipment where low heater-current drain is important. It is particularly useful in high-frequency, wide-band applications. Outlines section, 5C; requires miniature 7-contact socket.



7CM

|   |             |        |
|---|-------------|--------|
| Heater Voltage (ac/dc)  | 6.3 ±20%    | volts  |
| Heater Current  | 0.15        | ampere |
| Peak Heater-Cathode Voltage   | ±100 max.   | volts  |
| Direct Interelectrode Capacitances:                                     |             |        |
| Grid No.1 to Plate  | 0.0035 max. | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 5.4         | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 4.4         | pF     |

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |                    |       |
|--|--------------------|-------|
| Plate Voltage                                    | 330                | volts |
| Grid-No.2 (Screen-Grid) Voltage                  | See curve page 300 |       |
| Grid-No.2 Supply Voltage                         | 330                | volts |
| Grid-No.1 (Control-Grid) Voltage:                |                    |       |
| Negative-bias value                              | 55                 | volts |
| Positive-bias value                              | 0                  | volt  |
| Plate Dissipation                                | 3.3                | watts |
| Grid-No.2 Input:                                 |                    |       |
| For Grid-No.2 voltages up to 165 volts           | 0.55               | watt  |
| For Grid-No.2 voltages between 165 and 300 volts | See curve page 300 |       |

**CHARACTERISTICS**

|  |                                |         |
|--|--------------------------------|---------|
| Plate Voltage  | 250                            | volts   |
| Grid No.3  | Connected to cathode at socket |         |
| Grid-No.2 Voltage                                      | 150                            | volts   |
| Cathode Resistor                                       | 100                            | ohms    |
| Plate Resistance (Approx.)                             | 1.4                            | megohms |
| Transconductance                                       | 4600                           | μmhos   |
| Plate Current  | 7.4                            | mA      |
| Grid-No.2 Current                                      | 2.6                            | mA      |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μA | -7.7                           | volts   |

**TRANSCONDUCTANCE AT REDUCED HEATER VOLTAGE**

|  |      |       |
|--|------|-------|
| Average Value  | 3600 | μmhos |
| With heater volts = 5, plate supply volts = 250, grid No.3 connected to cathode at socket, grid-No.2 supply volts = 150, and cathode resistor (ohms) bypassed = 100. |      |       |

Refer to chart at end of section.


**6662/6BJ6**

Refer to chart at end of section.

**6663/6AL5**

Refer to chart at end of section.

**6664/6AB4**



**7BZ**

**BEAM POWER TUBE**

Miniature type used as output amplifier primarily in mobile communications equipment. Outlines section, 5D; requires miniature 7-contact socket.

**6669/  
6AQ5A**  
INDUSTRIAL  
TYPE

|  |           |         |
|--|-----------|---------|
| Heater Voltage (ac/dc)                                 | 6.3 ±20%  | volts   |
| Heater Current   | 0.45      | ampere  |
| Heater Warm-up Time (Average)                          | 11        | seconds |
| Heater-Cathode Voltage:                                |           |         |
| Peak value   | ±100 max. | volts   |
| Direct Interelectrode Capacitances (Approx.):          |           |         |
| Grid No.1 to Plate                                     | 0.4       | pF      |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 8         | pF      |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | 8.5       | pF      |

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|   |     |       |
|---|-----|-------|
| Plate Voltage                                       | 250 | volts |
| Grid-No.2 (Screen-Grid) Voltage                     | 250 | volts |
| Plate Dissipation                                   | 12  | watts |
| Grid-No.2 Input                                     | 2   | watts |
| Bulb Temperature (At hottest point on bulb surface) | 225 | °C    |

## TYPICAL OPERATION AND CHARACTERISTICS

|                                  |       |       |
|----------------------------------|-------|-------|
| Plate Voltage                    | 250   | volts |
| Grid-No.2 Voltage                | 250   | volts |
| Grid-No.1 (Control-Grid) Voltage | -12.5 | volts |
| Peak AF Grid-No.1 Voltage        | 12.5  | volts |
| Zero-Signal Plate Current        | 45    | mA    |
| Max.-Signal Plate Current        | 47    | mA    |
| Zero-Signal Grid-No.2 Current    | 4.5   | mA    |
| Max.-Signal Grid-No.2 Current    | 7     | mA    |
| Plate Resistance (Approx.)       | 52000 | ohms  |
| Transconductance                 | 4100  | μmhos |
| Load Resistance                  | 5000  | ohms  |
| Total Harmonic Distortion        | 8     | %     |
| Max.-Signal Power Output         | 4.5   | watts |

## MAXIMUM CIRCUIT VALUES

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |

Class AB<sub>1</sub> AmplifierMAXIMUM RATINGS (Same as for Class A<sub>1</sub> Amplifier)

## TYPICAL PUSH-PULL OPERATION

Unless otherwise specified, values are for 2 tubes

|  |       |       |
|--|-------|-------|
| Plate Voltage                              | 250   | volts |
| Grid-No.2 Voltage                          | 250   | volts |
| Grid-No.1 (Control-Grid) Voltage           | -15   | volts |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage     | 30    | volts |
| Zero-Signal Plate Current                  | 70    | mA    |
| Max.-Signal Plate Current                  | 79    | mA    |
| Zero-Signal Grid-No.2 Current              | 5     | mA    |
| Max.-Signal Grid-No.2 Current              | 13    | mA    |
| Effective Load Resistance (Plate to plate) | 10000 | ohms  |
| Total Harmonic Distortion                  | 5     | %     |
| Max.-Signal Power Output                   | 10    | watts |

MAXIMUM CIRCUIT VALUES (Same as for Class A<sub>1</sub> Amplifier)

## POWER OUTPUT AT REDUCED HEATER VOLTAGE

|  |     |       |
|--|-----|-------|
| Average Value  | 4.1 | watts |
| With heater volts = 5, plate volts = 250, grid-No.2 volts = 250, grid-No.1 volts = -12.5, rms signal volts = 8.8, and load resistance (ohms) = 5000. |     |       |

6676/6CB6A

Refer to chart at end of section.

6677/6CL6

Refer to chart at end of section.

6678/6U8A


Refer to chart at end of section.

6679/12AT7

INDUSTRIAL  
TYPE

HIGH-MU TWIN TRIODE

Miniature type used as a mixer, oscillator or amplifier in mobile communications equipment. Outlines section, 6B; requires miniature 9-contact socket. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section, type 12AT7 conditions.



9A

|   |           |           |        |
|---|-----------|-----------|--------|
| Heater Arrangement:                           | Series    | Parallel  |        |
| Heater Voltage (ac/dc) .....                  | 12.6 ±20% | 6.3 ±20%  | volts  |
| Heater Current .....                          | 0.15      | 0.3       | ampere |
| Peak Heater-Cathode Voltage .....             |           | ±100 max. | volts  |
| Direct Interelectrode Capacitances (Approx.): |           |           |        |
| Grid-Drive Operation:                         |           |           |        |
| Grid to Plate (Each unit) .....               |           | 1.5       | pF     |
| Grid to Cathode and Heater (Each unit) .....  |           | 2.2       | pF     |
| Plate to Cathode and Heater:                  |           |           |        |
| Unit No.1 .....                               |           | 0.5       | pF     |
| Unit No.2 .....                               |           | 0.4       | pF     |
| Cathode-Drive Operation:                      |           |           |        |
| Cathode to Plate (Each unit) .....            |           | 0.2       | pF     |
| Cathode to Grid and Heater (Each unit) .....  |           | 4.6       | pF     |
| Plate to Grid and Heater (Each unit) .....    |           | 1.8       | pF     |
| Heater to Cathode (Each unit) .....           |           | 2.4       | pF     |

**Class A<sub>1</sub> Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Maximum Values)**


|                           |     |       |
|---------------------------|-----|-------|
| Plate Voltage .....       | 330 | volts |
| Grid Voltage:             |     |       |
| Negative bias value ..... | 55  | volts |
| Positive bias value ..... | 0   | volt  |
| Plate Dissipation .....   | 2.8 | watts |

**CHARACTERISTICS**


|   |       |       |
|---|-------|-------|
| Plate Supply Voltage .....                              | 250   | volts |
| Cathode-Bias Resistor .....                             | 200   | ohms  |
| Amplification Factor .....                              | 60    |       |
| Plate Resistance (Approx.) .....                        | 10900 | ohms  |
| Transconductance .....                                  | 5500  | μmhos |
| Grid Voltage (Approx.) for plate current of 10 μA ..... | -12   | volts |
| Plate Current .....                                     | 10    | mA    |

**TRANSCONDUCTANCE AT REDUCED HEATER VOLTAGE**

|   |      |       |
|---|------|-------|
| Average Value (Each unit) .....   | 4400 | μmhos |
| With heater volts = 10 (Series connection), plate supply volts = 250, and cathode resistor (ohms) bypassed = 200. |      |       |

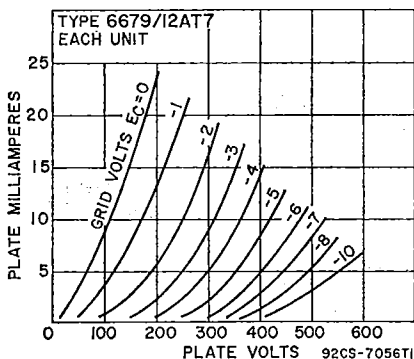

**6680/  
MEDIUM-MU TWIN TRIODE  
12AU7A  
INDUSTRIAL  
TYPE**



9A

Miniature type used as a phase inverter or push-pull amplifier in mobile communications equipment. Outlines section, 6B; requires miniature 9-contact socket. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section, type 12AU7A conditions.

|   | Series         | Parallel       |        |
|---|----------------|----------------|--------|
| Heater Arrangement                            |                |                |        |
| Heater Voltage (ac/dc)                        | 12.6 $\pm$ 20% | 6.3 $\pm$ 20%  | volts  |
| Heater Current                                | 0.15           | 0.3            | ampere |
| Heater-Cathode Voltage:                       |                |                |        |
| Peak value                                    |                | $\pm$ 200 max. | volts  |
| Average value                                 |                | 100 max.       | volts  |
| Direct Interelectrode Capacitances (Approx.): | Unit No. 1     | Unit No. 2     |        |
| Grid to Plate                                 | 1.5            | 1.5            | pF     |
| Grid to Cathode and Heater                    | 1.6            | 1.6            | pF     |
| Plate to Cathode and Heater                   | 0.4            | 0.32           | pF     |

### Class A<sub>1</sub> Amplifier (Each Unit Unless Otherwise Specified)

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                    |     |       |
|------------------------------------|-----|-------|
| Plate Voltage                      | 330 | volts |
| Grid Voltage, positive-bias value  | 0   | volt  |
| Plate Dissipation:                 |     |       |
| Each Plate                         | 3   | watts |
| Both Plates (Both units operating) | 6   | watts |

#### CHARACTERISTICS

|  |      |      |            |
|--|------|------|------------|
| Plate Voltage  | 100  | 250  | volts      |
| Grid Voltage   | 0    | -8.5 | volts      |
| Amplification Factor                                   | 20   | 17   |            |
| Plate Resistance (Approx.)                             | 6500 | 7700 | ohms       |
| Transconductance                                       | 3100 | 2200 | $\mu$ mhos |
| Plate Current  | 11.8 | 10.5 | mA         |
| Grid Voltage (Approx.) for plate current of 10 $\mu$ A | —    | -24  | volts      |

#### MAXIMUM CIRCUIT VALUES

|                            |      |        |
|----------------------------|------|--------|
| Grid-Circuit Resistance:   |      |        |
| For fixed-bias operation   | 0.25 | megohm |
| For cathode-bias operation | 1    | megohm |

#### TRANSCONDUCTANCE AT REDUCED HEATER VOLTAGE


|   |      |            |
|---|------|------------|
| Average Value (Each unit)   | 1750 | $\mu$ mhos |
| With heater volts = 10 (Series connection), plate volts = 250, and grid volts = -8.5. |      |            |

# 6681/ 12AX7A

INDUSTRIAL  
TYPE

## HIGH-MU TWIN TRIODE

Miniature type used as a phase inverter or twin resistance-coupled amplifier in mobile communications equipment. Outlines section, 6B; requires miniature 9-contact socket. For typical operation as a resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section, type 12AX7A conditions.



|   | Series         | Parallel       |        |
|---|----------------|----------------|--------|
| Heater Arrangement:                           |                |                |        |
| Heater Voltage (ac/dc)                        | 12.6 $\pm$ 20% | 6.3 $\pm$ 20%  | volts  |
| Heater Current                                | 0.15           | 0.3            | ampere |
| Heater-Cathode Voltage:                       |                |                |        |
| Peak value                                    |                | $\pm$ 200 max. | volts  |
| Average value                                 |                | 100 max.       | volts  |
| Direct Interelectrode Capacitances (Approx.): | Unit No. 1     | Unit No. 2     |        |
| Grid to Plate                                 | 1.7            | 1.7            | pF     |
| Grid to Cathode and Heater                    | 1.6            | 1.6            | pF     |
| Plate to Cathode and Heater                   | 0.46           | 0.34           | pF     |

### Class A<sub>1</sub> Amplifier (Each Unit)

#### MAXIMUM RATINGS (Design-Maximum Values)

|                     |     |       |
|---------------------|-----|-------|
| Plate Voltage       | 330 | volts |
| Grid Voltage:       |     |       |
| Negative-bias value | 55  | volts |
| Positive-bias value | 0   | volt  |
| Plate Dissipation   | 1.1 | watts |

**CHARACTERISTICS**

|                                  |       |       |       |
|----------------------------------|-------|-------|-------|
| Plate Voltage .....              | 100   | 250   | volts |
| Grid Voltage .....               | -1    | -2    | volts |
| Amplification Factor .....       | 100   | 100   |       |
| Plate Resistance (Approx.) ..... | 80000 | 62500 | ohms  |
| Transconductance .....           | 1250  | 1600  | μmhos |
| Plate Current .....              | 0.5   | 1.2   | mA    |

Refer to chart at end of section.


**6688A**

Refer to chart at end of section.

**6887**

Refer to chart at end of section.

**6922/E88CC**



**9HL**

**TWIN-POWER PENTODE**

**6939**

**INDUSTRIAL TYPE**

Miniature type twin power-pentode intended for use in communications equipment as a push-pull rf power-amplifier or frequency-multiplier at frequencies up to 500 MHz. Outlines section, 6E; requires miniature 9-contact socket.

|  |           |           |        |
|--|-----------|-----------|--------|
| Heater arrangement   | Series    | Parallel  |        |
| Heater Voltage (ac/dc) .....   | 12.6 ±10% | 6.3 ±10%  | volts  |
| Heater Current .....   | 0.3       | 0.6       | ampere |
| Peak Heater-Cathode Voltage .....  |           | ±100 max. | volts  |
| Bulb Temperature (At hottest point on bulb surface) .....  |           | 225 max.  | °C     |
| Direct Interelectrode Capacitances (Approx., Each Unit):   |           |           |        |
| Grid No.1 to Plate .....   |           | 0.15      | pF     |
| Grid No.1 to Cathode & Grid No.3, Grid No.2, and Heater .....  |           | 6.4       | pF     |
| Plate to Cathode & Grid No.3, Grid No.2, and Heater .....  |           | 1.6       | pF     |
| Transconductance (Each Unit) for dc plate volts = 150, dc grid-No.2 volts = 150, and dc plate mA = 25 .....                  |           | 10500     | μmhos  |
| Mu-Factor, grid No.2 to grid No.1 (Each Unit) for dc plate volts = 150, dc grid No.2 volts = 150, and dc plate mA = 25 ..... |           | 31        |        |

**Push-Pull RF Amplifier & Oscillator—Class C Telegraphy\* and**

**Push-Pull RF Power Amplifier—Class C FM Telephony**

Values are on a per-tube basis unless otherwise specified

**MAXIMUM RATINGS (Absolute-Maximum Values)**

|   |               |       |       |
|---|---------------|-------|-------|
|   | Up to 500 MHz |       |       |
|   | CCS*          | ICAS* |       |
| DC Plate Voltage .....                    | 250           | 250   | volts |
| DC Grid-No.2 (Screen-Grid) Voltage .....  | 200           | 200   | volts |
| DC Grid-No.1 (Control-Grid) Voltage ..... | -100          | -100  | volts |
| DC Plate Current .....                    | 90            | 100   | mA    |
| DC Grid-No.1 Current .....                | 6             | 8     | mA    |
| DC Cathode Current .....                  | 100           | 120   | mA    |
| Plate Input .....                         | 12            | 14    | watts |
| Grid-No.2 Input .....                     | 3             | 3.5   | watts |
| Grid-No.1 Input .....                     | 0.2           | 0.24  | watt  |
| Plate Dissipation .....                   | 6             | 7.5   | watts |

**TYPICAL OPERATION**

|  |            |       |       |
|--|------------|-------|-------|
|  | At 500 MHz |       |       |
| DC Plate Voltage .....                         | 180        | 200   | volts |
| DC Grid-No.2 Voltage .....                     | 180        | 200   | volts |
| DC Grid-No.1 Voltage .....                     | -20        | -20   | volts |
| From grid resistor for each grid No.1 of ..... | 27000      | 27000 | ohms  |
| Peak-to-Peak RF Grid-No.1 Voltage .....        | 50         | 50    | volts |
| DC Plate Current .....                         | 55         | 60    | mA    |
| DC Grid-No.2 Current .....                     | 12.5       | 14    | mA    |
| DC Grid-No.1 Current .....                     | 1.5        | 1.5   | mA    |
| Driver Power Output (Approx.) .....            | 1.2        | 1.2   | watts |
| Useful Power Output (Approx.)* .....           | 5          | 6     | watts |

### Plate-Modulated Push-Pull RF Power Amplifier—Class C Telephony

Carrier conditions per tube for use with a maximum modulation factor of 1  
Values are on a per-tube basis

#### MAXIMUM RATINGS (Absolute-Maximum Values)

|                                     | Up to 500 MHz |       |       |
|-------------------------------------|---------------|-------|-------|
|                                     | CCS*          | ICAS† |       |
| DC Plate Voltage                    | 200           | 200   | volts |
| DC Grid-No.2 (Screen-Grid) Voltage  | 200           | 200   | volts |
| DC Grid-No.1 (Control-Grid) Voltage | -100          | -100  | volts |
| DC Plate Current                    | 64            | 80    | mA    |
| DC Grid-No.1 Current                | 6             | 8     | mA    |
| DC Cathode Current                  | 80            | 96    | mA    |
| Plate Input                         | 8             | 10    | watts |
| Grid-No.2 Input                     | 2             | 2.3   | watts |
| Grid-No.1 Input                     | 0.2           | 0.24  | watt  |
| Plate Dissipation                   | 4             | 5     | watts |

#### TYPICAL OPERATION


|  | At 500 MHz |       |       |
|--|------------|-------|-------|
|  | CCS*       | ICAS† |       |
| DC Plate Voltage                         | 180        | 180   | volts |
| DC Grid-No.2 Voltage                     | 180        | 180   | volts |
| DC Grid-No.1 Voltage                     | -20        | -20   | volts |
| From grid resistor for each grid No.1 of | 68000      | 27000 | ohms  |
| Peak-to-Peak RF Grid-No.1 Voltage        | 45         | 50    | volts |
| DC Plate Current                         | 40         | 55    | mA    |
| DC Grid-No.2 Current                     | 9.5        | 12.5  | mA    |
| DC Grid-No.1 Current                     | 0.6        | 1.5   | mA    |
| Driver Power Output (Approx.)            | 1          | 1.2   | watts |
| Useful Power Output (Approx.)†           | 3.5        | 5     | watts |

### Frequency Tripler—Class C

Values are on a per-tube basis

#### MAXIMUM RATINGS (Absolute-Maximum Values)

|                                     | Up to 500 MHz |       |       |
|-------------------------------------|---------------|-------|-------|
|                                     | CCS*          | ICAS† |       |
| DC Plate Voltage                    | 250           | 250   | volts |
| DC Grid-No.2 (Screen-Grid) Voltage  | 200           | 200   | volts |
| DC Grid-No.1 (Control-Grid) Voltage | -100          | -100  | volts |
| DC Plate Current                    | 60            | 80    | mA    |
| DC Grid-No.1 Current                | 6             | 8     | mA    |
| DC Cathode Current                  | 70            | 80    | mA    |
| Plate Input                         | 8             | 10    | watts |
| Grid-No.2 Input                     | 3             | 3.5   | watts |
| Grid-No.1 Input                     | 0.2           | 0.24  | watt  |
| Plate Dissipation                   | 6             | 7.5   | watts |

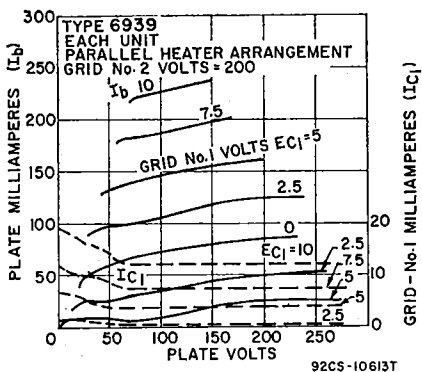



TYPICAL OPERATION


|  | Up to 500 MHz |       |       |
|--|---------------|-------|-------|
| DC Plate Voltage                           | 180           | 200   | volts |
| DC Grid-No.2 Voltage (Approx.)             | 180           | 190   | volts |
| Through resistor of                        | 1200          | 1200  | ohms  |
| DC Grid-No.1 Voltage                       | -74           | -74   | volts |
| From grid resistor for each grid No.1 of   | 82000         | 82000 | ohms  |
| Peak-to-Peak RF Grid-No.1 Voltage          | 165           | 165   | volts |
| DC Plate Current                           | 40            | 46    | mA    |
| DC Grid-No.2 Current                       | 9.7           | 11    | mA    |
| DC Grid-No.1 Current                       | 1.8           | 1.8   | mA    |
| Driver Power Output (Approx.)              | 1.1           | 1.1   | watts |
| Useful Power Output (Approx.) <sup>†</sup> | 1.8           | 2.2   | watts |

• Key-down conditions per tube without amplitude modulation. Amplitude modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.

\* Continuous Commercial Service.

† Intermittent Commercial and Amateur Service.

‡ This value of useful power is measured at load of output circuit.



9EU

BEAM POWER TUBE

6973

Miniature type used as power amplifier in compact high-fidelity audio equipment. Outlines section, 6G; requires miniature 9-contact socket.

|  |          |        |
|--|----------|--------|
| Heater Voltage (ac/dc)                                 | 6.3      | volts  |
| Heater Current   | 0.45     | ampere |
| Heater-Cathode Voltage:                                |          |        |
| Peak value   | ±200 max | volts  |
| Average value  | 100 max  | volts  |
| Direct Interelectrode Capacitances:                    |          |        |
| Grid-No.1 to Plate                                     | 0.4 max  | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 9        | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | 6        | pF     |

Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|   |       |       |
|---|-------|-------|
| Plate Voltage   | 250   | volts |
| Grid-No.2 (Screen-Grid) Voltage                         | 250   | volts |
| Grid-No.1 (Control-Grid) Voltage                        | -15   | volts |
| Plate Resistance (Approx.)                              | 73000 | ohms  |
| Transconductance  | 4800  | μmhos |
| Plate Current   | 46    | mA    |
| Grid-No.2 Current                                       | 3.5   | mA    |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μA | -40   | volts |

Push-Pull Class AB<sub>1</sub> Amplifier

MAXIMUM RATINGS (Design-Maximum Values)

|                                     |     |       |
|-------------------------------------|-----|-------|
| Plate Voltage                       | 440 | volts |
| Grid-No.2 Voltage                   | 330 | volts |
| Plate Dissipation                   | 12  | watts |
| Grid-No.2 Input                     | 2   | watts |
| Bulb Temperature (At hottest point) | 250 | °C    |

TYPICAL OPERATION (Values are for two tubes)

|  | Fixed Bias |      |      | Cathode Bias |      |          |
|--|------------|------|------|--------------|------|----------|
|  | 250        | 350  | 400  | 300          | 310  |          |
| Plate Supply Voltage                       | 250        | 280  | 290  | 300          | 310  | volts    |
| Grid-No.2 Supply Voltage                   | -15        | -22  | -25  | —            | —    | volts    |
| Grid-No.1 Voltage                          | —          | —    | —    | 230          | 270  | ohms     |
| Cathode-Bias Resistor                      | 30         | 44   | 50   | 48           | 55   | volts    |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage     | 92         | 58   | 50   | 80           | 77   | mA       |
| Zero-Signal Plate Current                  | 105        | 106  | 107  | 96           | 92   | mA       |
| Maximum-Signal Plate Current               | 7          | 3.5  | 2.5  | 6            | 5    | mA       |
| Zero-Signal Grid-No.2 Current              | 16         | 14   | 13.7 | 14           | 14   | mA       |
| Maximum-Signal Grid-No.2 Current           | 8000       | 7500 | 8000 | 5500         | 6000 | ohms     |
| Effective Load Resistance (Plate-to-plate) | 2          | 1.5  | 2    | 2            | 4    | per cent |
| Total Harmonic Distortion                  | 12.5       | 20   | 24   | 15           | 17   | watts    |
| Maximum-Signal Power Output                |            |      |      |              |      |          |

**MAXIMUM CIRCUIT VALUES**

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.5 | megohm |
| For cathode-bias operation    | 1   | megohm |

**Push-Pull Class AB<sub>1</sub> Amplifier**

Grid No.2 of Each Tube Connected to Tap on Plate Winding of Output Transformer

**MAXIMUM RATINGS (Design-Maximum Values)**



|                                     |      |       |
|-------------------------------------|------|-------|
| Plate and Grid-No.2 Supply Voltage  | 410  | volts |
| Plate Dissipation                   | 12   | watts |
| Grid-No.2 Input                     | 1.75 | watts |
| Bulb Temperature (At hottest point) | 250  | °C    |

**TYPICAL OPERATION (Values are for two tubes)**

|  | Fixed Bias | Cathode Bias |          |
|--|------------|--------------|----------|
| Plate Supply Voltage                       | 375        | 370          | volts    |
| Grid-No.2 Supply Voltage                   | *          | #            | volts    |
| Grid-No.1 Voltage*                         | -33.5      | -            | volts    |
| Cathode-Bias Resistor                      | -          | 355          | ohms     |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage     | 67         | 62           | volts    |
| Zero-Signal Cathode Current                | 62         | 74           | mA       |
| Maximum-Signal Cathode Current             | 95         | 84           | mA       |
| Effective Load Resistance (Plate-to-plate) | 12500      | 13000        | ohms     |
| Total Harmonic Distortion                  | 1.5        | 1.2          | per cent |
| Maximum-Signal Power Output                | 18.5       | 15           | watts    |

**MAXIMUM CIRCUIT VALUES**

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.1 | megohm |
| For cathode-bias operation    | 1   | megohm |

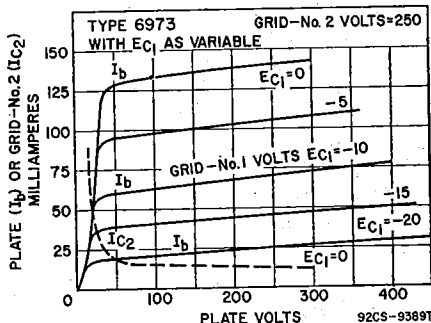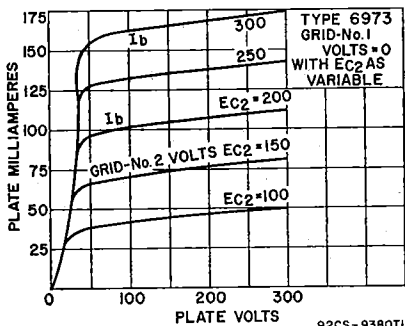

\* Obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to apply 50 per cent of the plate signal voltage to grid No.2 of each output tube.

# Obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to supply 43 per cent of the plate signal voltage to grid No.2 of each output tube.

\* The type of input-coupling network used should not introduce too much resistance in the grid-No.1 circuit. Transformer- or impedance-coupling devices are recommended.


6977

Refer to chart at end of section.

**7025**

**HIGH-MU TWIN TRIODE**

Miniature type used as phase inverter or resistance-coupled amplifier in high-quality, high-fidelity audio amplifiers. Outlines section, 6B; requires miniature 9-contact socket. This type is identical with miniature type 12AX7A except that it has a controlled equivalent noise and hum characteristic. For operation as resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section.



**EQUIVALENT-NOISE AND HUM VOLTAGE REFERENCED TO GRID (Each Unit)**


|                      |     |    |
|----------------------|-----|----|
| Average Value (rms)† | 1.8 | μV |
| Maximum Value (rms)* | 7   | μV |

† Measured in "true rms" units under following conditions: heater volts (ac), 6.3 (parallel connection); center tap of heater transformer connected to ground; plate supply volts, 250; plate load resistor, 2700 ohms; cathode-bypass capacitor, 100 μF; grid resistor, 0 ohms; and amplifier covering frequency range between 25 to 10000 cycles per second.

\* Same conditions as for "Average Value" except cathode resistor is unbypassed and grid resistor is 0.05 megohm.

Refer to chart at end of section.

**7027**



**BEAM POWER TUBE**

**7027A**

Glass octal type used in push-pull power amplifier circuits of high-fidelity audio equipment. Outlines section, 9F; requires octal socket. This tube, like other power-handling tubes, should be adequately ventilated.

|  |          |        |
|--|----------|--------|
| Heater Voltage (ac/dc)                                 | 6.3      | volts  |
| Heater Current   | 0.9      | ampere |
| <b>Heater-Cathode Voltage:</b>                         |          |        |
| Peak value   | ±200 max | volts  |
| Average value  | 100 max  | volts  |
| <b>Direct Interelectrode Capacitances (Approx.):</b>   |          |        |
| Grid No.1 to Plate                                     | 1.5      | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 10       | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3     | 7.5      | pF     |

**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|                                  |       |       |
|----------------------------------|-------|-------|
| Plate Voltage                    | 250   | volts |
| Grid-No.2 (Screen-Grid) Voltage  | 250   | volts |
| Grid-No.1 (Control-Grid) Voltage | -14   | volts |
| Plate Resistance (Approx.)       | 22500 | ohms  |
| Transconductance                 | 6000  | μmhos |
| Plate Current                    | 72    | mA    |
| Grid-No.2 Current                | 5     | mA    |

**Push-Pull Class AB<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                   |     |       |
|-------------------|-----|-------|
| Plate Voltage     | 600 | volts |
| Grid-No.2 Voltage | 500 | volts |
| Plate Dissipation | 35  | watts |
| Grid-No.2 Input   | 5   | watts |

**TYPICAL OPERATION (Values are for two tubes)**

|  | Fixed Bias |      |      | Cathode Bias |      |      |          |
|--|------------|------|------|--------------|------|------|----------|
|  | 400        | 450  | 540  | 400          | 380  | 425  |          |
| Plate Supply Voltage                       | 400        | 450  | 540  | 400          | 380  | 425  | volts    |
| Grid-No.2 Supply Voltage                   | 300        | 350  | 400  | 300          | 380  | 415  | volts    |
| Grid-No.1 Voltage                          | -25*       | -30* | -38* | —            | —    | —    | volts    |
| Cathode-Bias Resistor                      | —          | —    | —    | 200          | 180  | 200  | ohms     |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage     | 50         | 60   | 76   | 57           | 68.5 | 86   | volts    |
| Zero-Signal Plate Current                  | 102        | 95   | 100  | 112          | 138  | 150  | mA       |
| Maximum-Signal Plate Current               | 152        | 194  | 220  | 128          | 170  | 196  | mA       |
| Zero-Signal Grid-No.2 Current              | 6          | 3.4  | 5    | 7            | 5.6  | 8    | mA       |
| Maximum-Signal Grid-No.2 Current           | 17         | 19.2 | 21.4 | 16           | 20   | 20   | mA       |
| Effective Load Resistance (Plate-to-plate) | 6600       | 6000 | 6500 | 6600         | 4500 | 3800 | ohms     |
| Total Harmonic Distortion                  | 2          | 1.5  | 2    | 2            | 3.5  | 4    | per cent |
| Maximum-Signal Power Output                | 34         | 50   | 76   | 32           | 36   | 44   | watts    |

**MAXIMUM CIRCUIT VALUES**

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation*     | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | megohm |

\* The type of input coupling network used should not introduce too much resistance in the grid-No.1 circuit. Transformer- or impedance-coupling devices are recommended.

**Push-Pull Class AB<sub>1</sub> Amplifier**

Grid No.2 of Each Tube Connected to Tap on Plate Winding of Output Transformer

**MAXIMUM RATINGS (Design-Maximum Values)**

|  |     |       |
|--|-----|-------|
| Plate and Grid-No.2 Supply Voltage ..... | 600 | volts |
| Plate Dissipation .....                  | 35  | watts |
| Grid-No.2 Input .....                    | 4.5 | watts |



**TYPICAL OPERATION (Values are for two tubes)**

|  |      |          |
|--|------|----------|
| Plate Supply Voltage .....                       | 410  | volts    |
| Grid-No.2 Supply Voltage .....                   | *    | volts    |
| Cathode-Bias Resistor .....                      | 220  | ohms     |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage .....     | 68   | volts    |
| Zero-Signal Cathode Current .....                | 184  | mA       |
| Maximum-Signal Cathode Current .....             | 155  | mA       |
| Effective Load Resistance (Plate to plate) ..... | 8000 | ohms     |
| Total Harmonic Distortion .....                  | 1.6  | per cent |
| Maximum-Signal Power Output .....                | 24   | watts    |

**MAXIMUM CIRCUIT VALUE**

|  |     |        |
|--|-----|--------|
| Grid-No.1-Circuit Resistance, for cathode-bias operation ..... | 0.5 | megohm |
|--|-----|--------|

\* Obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to apply 43 per cent of the plate signal voltage to grid No.2 of each output tube.

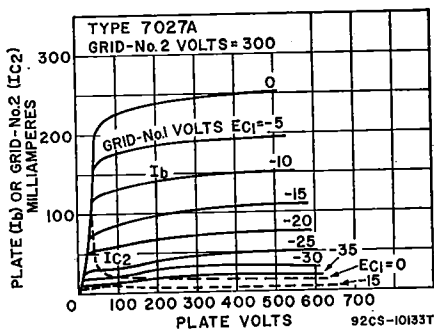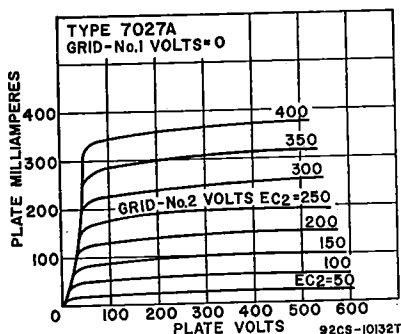


- 7044** Refer to chart at end of section.
- 7054** Refer to chart at end of section.
- 7055** Refer to chart at end of section.
- 7056** Refer to chart at end of section.
- 7057** Refer to chart at end of section.
- 7058** Refer to chart at end of section.

**7059**  
INDUSTRIAL  
TYPE

**MEDIUM-MU TRIODE—  
SHARP-CUTOFF PENTODE**

Miniature type medium-mu triode sharp-cutoff pentode for use as a combined oscillator and mixer in mobile communications equipment. Outlines section, 6B; requires miniature 9-contact socket.

|  |           |        |
|--|-----------|--------|
| Heater Voltage Range (ac/dc) .....           | 12 to 15  | volts  |
| Heater Current (Approx.) at 13.5 Volts ..... | 0.195     | ampere |
| Peak Heater-Cathode Voltage .....            | ±120 max. | volts  |



**9AE**

Direct Interelectrode Capacitances:

|   | Unshielded | Shielded <sup>○</sup> |    |
|---|------------|-----------------------|----|
| <b>Triode Unit:</b>   |            |                       |    |
| Grid to Plate .....   | 1.7        | 1.7                   | pF |
| Grid to Cathode, Heater .....   | 2.7        | 2.7                   | pF |
| Plate to Cathode, Heater .....  | 0.4        | 1                     | pF |
| <b>Pentode Unit:</b>  |            |                       |    |
| Grid No.1 to Plate .....  | 0.15 max.  | 0.007 max.            | pF |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield ..... | 5          | 5                     | pF |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield .....     | 2.5        | 3.4                   | pF |
| Heater to Cathode .....   | 3          | 3                     | pF |

<sup>○</sup> With external shield connected to cathode of unit under test except as noted.

■ With external shield connected to ground.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   | Triode Unit | Pentode Unit       |       |
|---|-------------|--------------------|-------|
| Plate Voltage .....   | 300         | 300                | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage .....                | —           | 300                | volts |
| Grid-No.2 Voltage .....                                     | —           | See curve page 300 |       |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value ..... | 0           | 0                  | volt  |
| Plate Dissipation .....                                     | 2.5         | 2.8                | watts |
| Grid-No.2 Input:  |             |                    |       |
| For grid-No.2 voltages up to 150 volts .....                | —           | 0.5                | watt  |
| For grid-No.2 voltages between 150 and 300 volts .....      | —           | See curve page 300 |       |

**MAXIMUM CIRCUIT VALUES**

|                                      |     |     |        |
|--------------------------------------|-----|-----|--------|
| <b>Grid-No.1-Circuit Resistance:</b> |     |     |        |
| For fixed-bias operation .....       | 0.5 | 0.5 | megohm |
| For cathode-bias operation .....     | 1   | 1   | megohm |

**CHARACTERISTICS**

|  |      |        |       |
|--|------|--------|-------|
| Heater Voltage .....                               | 13.5 | 13.5   | volts |
| Plate Supply Voltage .....                         | 150  | 250    | volts |
| Grid-No.2 Voltage .....                            | —    | 110    | volts |
| Cathode-Bias Resistor .....                        | 56   | 68     | ohms  |
| Amplification Factor .....                         | 40   | —      |       |
| Plate Resistance (Approx.) .....                   | 4700 | 400000 | ohms  |
| Transconductance .....                             | 8500 | 5200   | μmhos |
| Plate Current .....                                | 18   | 10     | mA    |
| Grid-No.2 Current .....                            | —    | 3.5    | mA    |
| Grid-No.1 Voltage for plate current of 10 μA ..... | -12  | -10    | volts |



**Special Ratings & Performance Data**

**HEATER-CYCLING LIFE PERFORMANCE**

|  |           |        |
|--|-----------|--------|
| Cycles of Intermittent Operation ..... | 2000 min. | cycles |
|--|-----------|--------|

**LOW-FREQUENCY VIBRATION PERFORMANCE**


|  |          |    |
|--|----------|----|
| RMS Output Voltage, Triode Unit .....  | 150 max. | mV |
| RMS Output Voltage, Pentode Unit ..... | 250 max. | mV |

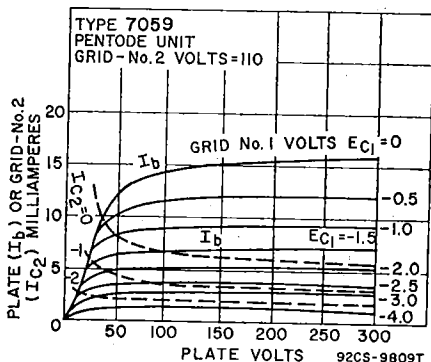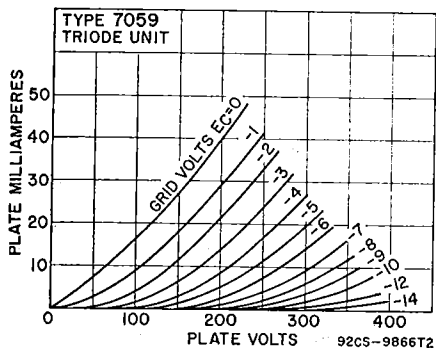

|             |                                   |
|-------------|-----------------------------------|
| <b>7060</b> | Refer to chart at end of section. |
| <b>7061</b> | Refer to chart at end of section. |
| <b>7167</b> | Refer to chart at end of section. |

## 7189 POWER PENTODE

Miniature type used as power amplifier tube in high-fidelity audio equipment. Outlines section, 6G; requires miniature 9-contact socket.



|  |          |        |
|--|----------|--------|
| Heater Voltage .....   | 6.3      | volts  |
| Heater Current .....   | 0.76     | ampere |
| Peak Heater-Cathode Voltage .....                            | ±100 max | volts  |
| Direct Interelectrode Capacitances (Approx.):                |          |        |
| Grid No.1 to Plate .....                                     | 0.5      | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 10.8     | pF     |
| Plate to Cathode, Heater, Grid-No.2, and Grid No.3 .....     | 6.5      | pF     |
| Grid No.1 to Heater .....                                    | 0.25     | pF     |

### Class A<sub>1</sub> Amplifier

#### CHARACTERISTICS

|   |       |       |
|---|-------|-------|
| Plate Voltage .....                     | 250   | volts |
| Grid-No.2 (Screen-Grid) Voltage .....   | 250   | volts |
| Grid-No.1 (Control-Grid) Voltage .....  | -7.3  | volts |
| Mu-Factor, Grid No.2 to Grid No.1 ..... | 19.5  |       |
| Plate Resistance (Approx.) .....        | 40000 | ohms  |
| Transconductance .....                  | 11300 | μmhos |
| Plate Current .....                     | 48    | mA    |
| Grid-No.2 Current .....                 | 5.5   | mA    |

### Push-Pull Class AB<sub>1</sub> Amplifier

|   |     |                                     |       |
|---|-----|-------------------------------------|-------|
|   |     | Grid-No.2<br>Special<br>Connection* |       |
| <b>MAXIMUM RATINGS (Design-Center Values)</b> |     |                                     |       |
| Plate Voltage .....                           | 400 | 375                                 | volts |
| Grid-No.2 Voltage .....                       | 300 | •                                   | volts |
| Cathode Current .....                         | 65  | 65                                  | mA    |
| Plate Dissipation .....                       | 12  | 12                                  | watts |
| Zero-Signal Grid-No.2 Input .....             | 2   | 2                                   | watts |
| Maximum-Signal Grid-No.2 Input .....          | 4   | 4                                   | watts |

#### TYPICAL OPERATION (Values are for two tubes)


|  |      |       |          |
|--|------|-------|----------|
| Plate Supply Voltage .....                       | —    | 375   | volts    |
| Plate Voltage .....                              | 400  | —     | volts    |
| Grid-No.2 Supply Voltage .....                   | —    | •     |          |
| Grid-No.2 Voltage .....                          | 300  | •     | volts    |
| Grid-No.1 Voltage .....                          | -15  | —     | volts    |
| Cathode-Bias Resistor .....                      | —    | 220   | ohms     |
| Peak AF Grid-No.1 Voltage .....                  | 14.8 | 17.7  | volts    |
| Zero-Signal Plate Current .....                  | 15   | 70    | mA       |
| Maximum-Signal Plate Current .....               | 105  | 81    | mA       |
| Zero-Signal Grid-No.2 Current .....              | 1.6  | •     | mA       |
| Maximum-Signal Grid-No.2 Current .....           | 25   | •     | mA       |
| Effective Load Resistance (Plate-to-plate) ..... | 8000 | 11000 | ohms     |
| Total Harmonic Distortion .....                  | 4    | 3     | per cent |
| Maximum-Signal Power Output .....                | 24   | 16.5  | watts    |

#### MAXIMUM CIRCUIT VALUES

|                                    |            |              |        |
|------------------------------------|------------|--------------|--------|
| Grid-No.1-Circuit Resistance ..... | Fixed Bias | Cathode Bias |        |
|                                    | 0.3        | 1            | megohm |

- Grid No.2 of each tube connected to tap on plate winding of output transformer.
- Obtained from taps on primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to supply 43 per cent of the plate signal voltage to grid No.2 of each output tube.

## MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE 7199



Miniature type used in high-quality, high-fidelity audio equipment, particularly in phase splitters; tone-control amplifiers, and high-gain voltage amplifiers. Outlines section, 6B; requires miniature 9-contact socket. For operation as resistance-coupled amplifier, refer to Resistance-Coupled Amplifier section. In direct-coupled voltage-amplifier phase-splitter circuits, the pentode unit should drive the triode unit.

|   |          |        |
|---|----------|--------|
| Heater Voltage (ac/dc)  | 6.3      | volts  |
| Heater Current  | 0.45     | ampere |
| Heater-Cathode Voltage:   |          |        |
| Peak value  | ±200 max | volts  |
| Average value   | 100 max  | volts  |
| Direct Interelectrode Capacitances:                                     |          |        |
| Triode Unit:  |          |        |
| Grid to Plate   | 2        | pF     |
| Grid to Cathode and Heater  | 2.3      | pF     |
| Plate to Cathode and Heater   | 0.3      | pF     |
| Pentode Unit:   |          |        |
| Grid No.1 to Plate  | 0.06 max | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 5        | pF     |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield     | 2        | pF     |

### EQUIVALENT-NOISE AND HUM VOLTAGE REFERENCED TO GRID

|                     |             |              |    |
|---------------------|-------------|--------------|----|
|                     | Triode Unit | Pentode Unit |    |
| Median Value (rms)  | 10†         | 35*          | μV |
| Maximum Value (rms) | 150†        | 100*         | μV |



† Measured in "true rms" units under the following conditions: heater volts (ac), 6.3; center tap of heater transformer connected to ground; plate-supply volts, 250; plate load resistor, 0.1 megohm; cathode resistor, 1500 ohms; grid resistor, 0.05 megohm; and amplifier covering frequency range between 25 and 10000 cycles per second.

\* Same conditions as for triode unit except: grid-No.2 supply volts, 250; grid-No.2 resistor, 0.33 megohm; grid-No.2-bypass capacitor, 0.22 μF; cathode resistor, 1200 ohms; and grid-No.1 resistor, 0.05 megohm.

### Class A<sub>1</sub> Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|   |     |                    |       |
|---|-----|--------------------|-------|
| Plate Voltage   | 330 | 330                | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | —   | See curve page 300 |       |
| Grid-No.2 Supply Voltage                              | 0   | 330                | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0   | 0                  | volts |
| Plate Dissipation                                     | 2.4 | 3                  | watts |
| Grid-No.2 Input:                                      |     |                    |       |
| For grid-No.2 voltages up to 165 volts                | —   | 0.6                | watt  |
| For grid-No.2 voltages between 165 and 330 volts      | —   | See curve page 300 |       |

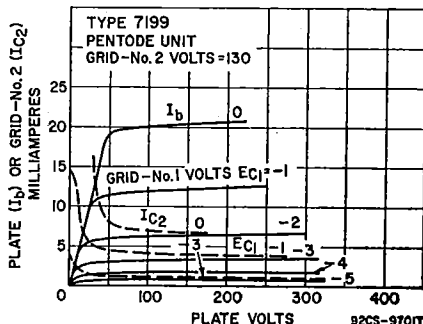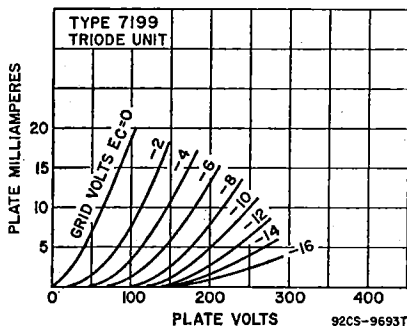

**CHARACTERISTICS**

|   | Triode Unit | Pentode Unit |      |            |
|---|-------------|--------------|------|------------|
| Plate Supply Voltage .....  | 215         | 100          | 220  | volts      |
| Grid-No.2 Supply Voltage .....                                    | —           | 50           | 130  | volts      |
| Grid-No.1 Voltage .....   | -8.5        | —            | —    | volts      |
| Cathode-Bias Resistor .....                                       | —           | 1000         | 62   | ohms       |
| Amplification Factor .....  | 17          | —            | —    |            |
| Plate Resistance (Approx.) .....                                  | 0.0081      | 1            | 0.4  | megohm     |
| Transconductance .....  | 2100        | 1500         | 7000 | $\mu$ mhos |
| Plate Current .....   | 9           | 1.1          | 12.5 | mA         |
| Grid-No.2 Current .....   | —           | 0.35         | 3.5  | mA         |
| Grid-No.1 Voltage (Approx.) for plate current of 10 $\mu$ A ..... | -40         | -4           | —    | volts      |


**MAXIMUM CIRCUIT VALUES**

|  | Triode Unit | Pentode Unit |        |
|--|-------------|--------------|--------|
| Grid-No.1-Circuit Resistance: <sup>*</sup> |             |              |        |
| For fixed-bias operation .....             | 0.5         | 0.25         | megohm |
| For cathode-bias operation .....           | 1           | 1            | megohm |

\* If either unit is operated at maximum rated conditions, grid-No.1-circuit resistance for both units should not exceed the stated value.

**7247****DUAL TRIODE**

Miniature type used for combined first- and second-stage audio preamplification in high-fidelity phonograph or tape equipment. Tube has high-mu unit and medium-mu unit. Outline 8B, Outlines section. Tube requires miniature nine-contact socket and may be operated in any position. Heater: volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.15 (series), 0.3 (parallel).

**9A****Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|                           | Unit No.1 | Unit No.2 |       |
|---------------------------|-----------|-----------|-------|
| Plate Voltage .....       | 330       | 330       | volts |
| Grid Voltage:             |           |           |       |
| Negative-bias value ..... | 55        | 55        | volts |
| Positive-bias value ..... | 0         | 0         | volts |
| Cathode Current .....     | —         | 22        | mA    |
| Plate Dissipation .....   | 1.2       | 3         | watts |
| Heater-Cathode-Voltage:   |           |           |       |
| Peak value .....          |           | ±200 max  | volts |
| Average value .....       |           | 100 max   | volts |

**CHARACTERISTICS**

|  | Unit No.1 |       | Unit No.2 |      |            |
|--|-----------|-------|-----------|------|------------|
| Plate Voltage .....  | 100       | 250   | 100       | 250  | volts      |
| Grid Voltage .....   | -1        | -2    | 0         | -8.5 | volts      |
| Amplification Factor .....                                   | 100       | 100   | 20        | 17   |            |
| Plate Resistance (Approx.) .....                             | 80000     | 62500 | 6500      | 7700 | ohms       |
| Transconductance .....                                       | 1250      | 1600  | 3100      | 2200 | $\mu$ mhos |
| Plate Current .....  | 0.5       | 1.2   | 11.8      | 10.5 | mA         |
| Grid Voltage (Approx.) for plate current of 10 $\mu$ A ..... | —         | —     | —         | -24  | volts      |

**MAXIMUM CIRCUIT VALUES**

|                                  | Unit No.1 | Unit No.2 |         |
|----------------------------------|-----------|-----------|---------|
| Grid-Circuit Resistance:         |           |           |         |
| For fixed-bias operation .....   | 15 max    | 0.5 max   | megohms |
| For cathode-bias operation ..... | —         | 1 max     | megohm  |

**HUM OUTPUT VOLTAGE**

|  |     |             |
|--|-----|-------------|
| Average Value (rms, cathode bypassed) <sup>■</sup> .....   | 1.8 | $\mu$ volts |
| Maximum Value (rms, cathode unbypassed) <sup>•</sup> ..... | 7   | $\mu$ volts |

<sup>•</sup> The dc component must not exceed 100 volts.

<sup>■</sup> Measured in "true rms" units under the following conditions: heater volts (ac), 6.3 (parallel connection); center tap of heater transformer connected to ground; dc plate supply volts, 250; plate load resistor, 0.1 megohm; cathode resistor, 2700 ohms; cathode-bypass capacitor, 100  $\mu$ f; grid resistor, 0 ohms; amplifier covering frequency range of 25 to 10000 cps.

<sup>•</sup> Same conditions as above, except that cathode resistor is unbypassed and grid resistor is 0.05 megohm.




Refer to chart at end of section.

7258

Refer to chart at end of section.

7308



**POWER PENTODE**

**7355**

Glass octal type used in the power-output stage of high-fidelity audio-frequency amplifier systems. Outlines section, 13F; requires octal socket. Heater: volts (ac/dc), 6.3; amperes, 0.8; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| Plate Voltage   | 500  | volts |
| Grid-No.2 (Screen-Grid) Voltage                       | 400  | volts |
| Grid-No.1 (Control-Grid) Voltage, Positive-bias value | 0    | volts |
| Average Cathode Current                               | 100  | mA    |
| Plate Dissipation                                     | 18   | watts |
| DC Grid-No.2 Input                                    | 3.5* | volts |

**TYPICAL OPERATION AND CHARACTERISTICS**

|  |       |            |
|--|-------|------------|
| Plate Voltage  | 250   | volts      |
| Grid-No.2 Voltage  | 225   | volts      |
| Grid-No.1 Voltage  | -15   | volts      |
| Peak AF Grid-No.1 Voltage                                    | 15    | volts      |
| Plate Resistance (Approx.)                                   | 42000 | ohms       |
| Transconductance   | 7600  | $\mu$ mhos |
| Zero-Signal Plate Current                                    | 62    | mA         |
| Maximum Signal Plate Current                                 | 74    | mA         |
| Zero-Signal Grid-No.2 Current                                | 3.2   | mA         |
| Maximum-Signal Grid-No.2 Current                             | 16.5  | mA         |
| Load Resistance  | 2500  | ohms       |
| Total Harmonic Distortion (Approx.)                          | 15    | per cent   |
| Maximum-Signal Power Output                                  | 9     | watts      |
| Grid-No.1 Voltage (Approx.) for plate current of 500 $\mu$ A | -35   | volts      |

**MAXIMUM CIRCUIT VALUES**

|                               |     |        |
|-------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance: |     |        |
| For fixed-bias operation      | 0.3 | megohm |
| For cathode-bias operation    | 1   | megohm |

\* Grid-No.2 input may reach 7 watts during peak levels of speech and music signals.

**Push-Pull Class AB<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Same as for class A<sub>1</sub> amplifier)**

**TYPICAL OPERATION (Values are for two tubes)**

|  |      |      |          |
|--|------|------|----------|
| Plate Voltage                              | 300  | 400  | volts    |
| Grid-No.2 Voltage                          | 250  | 300  | volts    |
| Grid-No.1 Voltage                          | -21  | -34  | volts    |
| Peak AF Grid-No.1 Voltage                  | 42   | 60   | volts    |
| Zero-Signal Plate Current                  | 100  | 56   | mA       |
| Maximum-Signal Plate Current               | 185  | 175  | mA       |
| Zero-Signal Grid-No.2 Current              | 5.5  | 3.5  | mA       |
| Maximum-Signal Grid-No.2 Current           | 24   | 24   | mA       |
| Effective Load Resistance (Plate-to-plate) | 4000 | 5000 | ohms     |
| Total Harmonic Distortion                  | 2    | 6    | per cent |
| Maximum-Signal Power Output                | 28.5 | 40   | watts    |


Refer to chart at end of section.

7360

## 7408

## BEAM POWER TUBE

Glass octal type used as output amplifier tube in high-quality sound systems. Outlines section, 13D; requires octal socket.



TAC

|  |      |        |
|--|------|--------|
| Heater Voltage (ac/dc) .....                                 | 6.3  | volts  |
| Heater Current .....   | 0.45 | ampere |
| Heater-Cathode Voltage:                                      |      |        |
| Peak value .....   | ±200 | volts  |
| Average value .....  | 100  | volts  |
| Direct Interelectrode Capacitances:                          |      |        |
| Grid No.1 to Plate .....                                     | 0.7  | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 9    | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 7.5  | pF     |

Class A<sub>1</sub> Amplifier

## MAXIMUM RATINGS (Design-Maximum Values)

|                                       |     |       |
|---------------------------------------|-----|-------|
| Plate Voltage .....                   | 350 | volts |
| Grid-No.2 (Screen-Grid) Voltage ..... | 315 | volts |
| Grid-No.2 Input .....                 | 2.2 | watts |
| Plate Dissipation .....               | 14  | watts |

## TYPICAL OPERATION AND CHARACTERISTICS

|  |      |       |          |
|--|------|-------|----------|
| Plate Voltage .....                    | 60   | 250   | volts    |
| Grid-No.2 Voltage .....                | 250  | 250   | volts    |
| Grid-No.1 (Control-Grid) Voltage ..... | 0    | -12.5 | volts    |
| Peak AF Grid-No.1 Voltage .....        | —    | 12.5  | volts    |
| Zero-Signal Plate Current .....        | 100* | 45    | mA       |
| Maximum-Signal Plate Current .....     | —    | 47    | mA       |
| Zero-Signal Grid-No.2 Current .....    | 22*  | 4.5   | mA       |
| Maximum-Signal Grid-No.2 Current ..... | —    | 7     | mA       |
| Plate Resistance (Approx.) .....       | —    | 5000  | ohms     |
| Transconductance .....                 | —    | 4100  | μmhos    |
| Load Resistance .....                  | —    | 5000  | ohms     |
| Total Harmonic Distortion .....        | —    | 7     | per cent |
| Maximum-Signal Power Output .....      | —    | 4.5   | watts    |

## MAXIMUM CIRCUIT VALUES


|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |        |
| For fixed-bias operation .....   | 0.1 | megohm |
| For cathode-bias operation ..... | 0.5 | megohm |

\* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

## 7543

## SHARP-CUTOFF PENTODE

Miniature type used in compact audio equipment. Outlines section, 5C; requires miniature 7-contact socket. This type is identical with miniature type 6AU6A except that it has a controlled hum characteristic.




7BK

## HUM OUTPUT VOLTAGE

|   |      |            |
|---|------|------------|
| Average Value, (rms, cathode bypassed) .....  | 1.2† | millivolts |
| Average Value (rms, cathode unbypassed) ..... | 0.9* | millivolt  |

† Measured in "true rms" units under the following conditions: heater volts (ac), 6.3; center tap of heater transformer connected to ground; plate and grid-No.2 supply volts, 250; plate load resistor, 0.27 megohm; grid No.3 and internal shield connected to cathode at socket; grid-No.2 resistor, 0.68 megohm; grid-No.1 resistor, 0.1 megohm; cathode resistor, 1000 ohms; grid resistor of following stage, 10 megohms; and stage gain, 340.

\* Same conditions as above except that cathode resistor is unbypassed and stage gain is 110.



9LK

BEAM POWER TUBE

7551

INDUSTRIAL TYPE

Miniature type for use as a class C radio-frequency amplifier, oscillator, and frequency-multiplier up to 175 MHz in mobile communications equipment. Outlines section, 6E; requires miniature 9-contact socket. Curves shown under type 7558 also apply to the 7551.

|   |           |        |
|---|-----------|--------|
| Heater Voltage (ac/dc)                                | 13.5 ±1.5 | volts  |
| Heater Current  | 0.36      | ampere |
| Peak Heater-Cathode Voltage                           | ±100 max. | volts  |
| Direct Interelectrode Capacitances:                   |           |        |
| Grid No.1 to Plate                                    | 0.15 max. | pF     |
| Grid No.1 to Cathode, Grid No.3, Grid No.2 and Heater | 10        | pF     |
| Plate to Cathode, Grid No.3, Grid No.2 and Heater     | 5.5       | pF     |
| Bulb Temperature (At hottest point on bulb surface)   | 225 max.  | °C     |

MAXIMUM CIRCUIT VALUE

|  |     |        |
|--|-----|--------|
| Grid-No.1-Circuit Resistance—CCS or ICAS operation | 0.1 | megohm |
|--|-----|--------|

Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|                                   |                                |       |
|-----------------------------------|--------------------------------|-------|
| Heater Voltage                    | 13.5                           | volts |
| Plate Voltage                     | 250                            | volts |
| Grid No.3                         | Connected to cathode at socket | volts |
| Grid-No.2 Voltage                 | 250                            | volts |
| Grid-No.1 Voltage                 | -18                            | volts |
| Mu-Factor, Grid No.2 to Grid No.1 | 8.7                            |       |
| Transconductance                  | 5300                           | μmhos |
| Plate Current                     | 40                             | mA    |
| Grid-No.2 Current                 | 3                              | mA    |

AF Power Amplifier & Modulator—Class AB<sub>1</sub>†

MAXIMUM CCS\* RATINGS (Absolute-Maximum Values)

|   |     |       |
|---|-----|-------|
| DC Plate Voltage                          | 375 | volts |
| Grid No.3 (Suppressor Grid)               | 0   | volt  |
| DC Grid-No.2 (Screen-Grid) Voltage        | 300 | volts |
| Max.-Signal DC Plate Current <sup>‡</sup> | 70  | mA    |
| Max.-Signal Plate Input <sup>‡</sup>      | 21  | watts |
| Max.-Signal Grid-No.2 Input <sup>‡</sup>  | 2   | watts |
| Plate Dissipation <sup>‡</sup>            | 10  | watts |

TYPICAL CCS PUSH-PULL OPERATION

Values are for 2 tubes

|  |                                |       |
|--|--------------------------------|-------|
| Heater Voltage                             | 13.5                           | volts |
| DC Plate Voltage                           | 300                            | volts |
| Grid No.3                                  | Connected to cathode at socket | volts |
| DC Grid-No.2 Voltages                      | 250                            | volts |
| DC Grid-No.1 Voltages                      | -21                            | volts |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage     | 40                             | volts |
| Zero-Signal DC Plate Current               | 40                             | mA    |
| Max.-Signal DC Plate Current               | 125                            | mA    |
| Zero-Signal DC Grid-No.2 Current           | 2                              | mA    |
| Max.-Signal DC Grid-No.2 Current           | 14                             | mA    |
| Effective Load Resistance (Plate to plate) | 5000                           | ohms  |
| Max.-Signal Driving Power                  | 0                              | watts |
| Total Harmonic Distortion                  | 5                              | %     |
| Max.-Signal Power Output (Approx.)         | 20.5                           | watts |

RF Power Amplifier & Oscillator—Class C Telegraphy† and

RF Power Amplifier—Class C FM Telephony

MAXIMUM RATINGS (Absolute-Maximum Values)

|                             |               |        |       |
|-----------------------------|---------------|--------|-------|
|                             | Up to 175 MHz |        |       |
| DC Plate Voltage            | CCS*          | ICAS** | volts |
| Grid No.3 (Suppressor Grid) | 375           | 375    | volt  |
|                             | 0             | 0      |       |

|                                     |      |      |       |
|-------------------------------------|------|------|-------|
| DC Grid-No.2 (Screen-Grid) Voltage  | 300  | 300  | volts |
| DC Grid-No.1 (Control-Grid) Voltage | -125 | -125 | volts |
| DC Plate Current                    | 70   | 80   | mA    |
| DC Grid-No.2 Current                | 15   | 15   | mA    |
| DC Grid-No.1 Current                | 5    | 5    | mA    |
| Plate Input                         | 21   | 24   | watts |
| Grid-No.2 Input                     | 2    | 2    | watts |
| Plate Dissipation                   | 10   | 12   | watts |

## TYPICAL OPERATION

As amplifier at 175 MHz

|                                 | CCS●                           | ICAS●● |       |
|---------------------------------|--------------------------------|--------|-------|
| Heater Voltage                  | 13.5                           | 13.5   | volts |
| DC Plate Voltage                | 250                            | 300    | volts |
| Grid No.3                       | Connected to cathode at socket |        |       |
| DC Grid-No.2 Voltage□□          | 200                            | 250    | volts |
| DC Grid-No.1 Voltage●●          | -40                            | -55    | volts |
| Peak RF Grid-No.1 Voltage       | 47                             | 62     | volts |
| DC Plate Current                | 60                             | 80     | mA    |
| DC Grid-No.2 Current            | 3.7                            | 5.1    | mA    |
| DC Grid-No.1 Current (Approx.)  | 1.5                            | 1.6    | mA    |
| Driver Power Output (Approx.)▲▲ | 1                              | 1.5    | watts |
| Useful Power Output (Approx.)*  | 6.5                            | 10     | watts |

## Plate-Modulated RF Power Amplifier—Class C Telephony

Carrier conditions per tube for use with a maximum modulation factor of 1

## MAXIMUM RATINGS (Absolute-Maximum Values)

|                                     | Up to 175 MHz |        |       |
|-------------------------------------|---------------|--------|-------|
|                                     | CCS●          | ICAS●● |       |
| DC Plate Voltage                    | 300           | 300    | volts |
| Grid No.3 (Suppressor Grid)         | 0             | 0      | volt  |
| DC Grid-No.2 (Screen-Grid) Voltage  | 300           | 300    | volts |
| DC Grid-No.1 (Control-Grid) Voltage | -125          | -125   | volts |
| DC Plate Current                    | 60            | 70     | mA    |
| DC Grid-No.2 Current                | 10            | 10     | mA    |
| DC Grid-No.1 Current                | 5             | 5      | mA    |
| Plate Input                         | 15            | 17.5   | watts |
| Grid-No.2 Input                     | 1.4           | 1.4    | watts |
| Plate Dissipation                   | 7             | 8      | watts |

## TYPICAL OPERATION

At 175 MHz

|                                | CCS●                           | ICAS●● |       |
|--------------------------------|--------------------------------|--------|-------|
| Heater Voltage                 | 13.5                           | 13.5   | volts |
| DC Plate Voltage               | 250                            | 250    | volts |
| Grid No.3                      | Connected to cathode at socket |        |       |
| DC Grid-No.2 Voltage▲          | 250                            | 250    | volts |
| DC Grid-No.1 Voltage*          | -70                            | -75    | volts |
| From a grid-No.1 resistor of   | 33000                          | 33000  | ohms  |
| RF Grid-No.1 Voltage           | 75                             | 80     | volts |
| DC Plate Current               | 60                             | 70     | mA    |
| DC Grid-No.2 Current           | 2.5                            | 3      | mA    |
| DC Grid-No.1 Current (Approx.) | 2.1                            | 2.3    | mA    |
| Driving Power (Approx.)▲▲      | 1                              | 1      | watts |
| Useful Power Output*           | 6.5                            | 7.5    | watts |

## Frequency Multiplier

## MAXIMUM RATINGS (Absolute-Maximum Values)

|                                     | CCS● | ICAS●● |       |
|-------------------------------------|------|--------|-------|
| DC Plate Voltage                    | 375  | 375    | volts |
| Grid No.3 (Suppressor Grid)         | 0    | 0      | volt  |
| DC Grid-No.2 (Screen-Grid) Voltage  | 300  | 300    | volts |
| DC Grid-No.1 (Control-Grid) Voltage | -125 | -125   | volts |
| DC Plate Current                    | 50   | 60     | mA    |
| DC Grid-No.2 Current                | 15   | 15     | mA    |
| DC Grid-No.1 Current                | 5    | 5      | mA    |
| Plate Input                         | 13   | 15     | watts |
| Grid-No.2 Input                     | 2    | 2      | watts |
| Plate Dissipation                   | 10   | 12     | watts |

## TYPICAL OPERATION

As doubler to 175 MHz

|                              | CCS●                           | ICAS●● |       |
|------------------------------|--------------------------------|--------|-------|
| Heater Voltage               | 13.5                           | 13.5   | volts |
| DC Plate Voltage             | 250                            | 250    | volts |
| Grid No.3                    | Connected to cathode at socket |        |       |
| DC Grid-No.2 Voltage         | 200                            | 250    | volts |
| DC Grid-No.1 Voltage●●       | -53                            | -66    | volts |
| From a grid-No.1 resistor of | 53000                          | 44000  | ohms  |
| Peak RF Grid-No.1 Voltage    | 60                             | 74     | volts |

|   |     |     |       |
|---|-----|-----|-------|
| DC Plate Current .....                      | 50  | 60  | mA    |
| DC Grid-No.2 Current .....                  | 2.6 | 3.5 | mA    |
| DC Grid-No.1 Current (Approx.) .....        | 1   | 1.5 | mA    |
| Driving Power (Approx.) <sup>▲▲</sup> ..... | 0.4 | 0.6 | watt  |
| Useful Power Output* .....                  | 3   | 4.5 | watts |

As tripler to 175 MHz

|   |                                |       |       |
|---|--------------------------------|-------|-------|
| Heater Voltage .....                        | 13.5                           | 13.5  | volts |
| DC Plate Voltage .....                      | 200                            | 250   | volts |
| Grid No.3 .....                             | Connected to cathode at socket |       |       |
| DC Grid No.2 Voltage .....                  | 200                            | 250   | volts |
| DC Grid-No.1 Voltage <sup>⊕⊕</sup> .....    | -90                            | -120  | volts |
| From a grid-No.1 resistor of .....          | 50000                          | 70000 | ohms  |
| Peak RF Grid-No.1 Voltage .....             | 105                            | 130   | volts |
| DC Plate Current .....                      | 50                             | 60    | mA    |
| DC Grid-No.2 Current .....                  | 3                              | 3.9   | mA    |
| DC Grid-No.1 Current (Approx.) .....        | 1.85                           | 1.7   | mA    |
| Driving Power (Approx.) <sup>▲▲</sup> ..... | 0.4                            | 0.6   | watt  |
| Useful Power Output* .....                  | 1.4                            | 2.3   | watts |

◆ Subscript 1 indicates that grid-No.1 current does not flow during any part of the input cycle.

● Continuous Commercial Service.

●● Intermittent Commercial and Amateur Service.

■ Averaged over any audio-frequency cycle of sine-wave form.

† Key-down conditions per tube without amplitude modulation. Amplitude modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 116% of the carrier conditions.

§ Obtained preferably from a fixed supply.

□ Obtained preferably from a separate source or from the plate-voltage supply with a voltage divider. If a series resistor is used, it should be adjustable to obtain the desired operating plate current after initial tuning adjustments are completed.

⊕⊕ Obtained from a grid-No.1 resistor or from a combination of grid-No.1 resistor with either fixed supply or cathode resistor.

▲▲ Driver stage is required to supply tube losses and rf-circuit losses. The driver stage should be designed to provide an excess of power above the indicated values to take care of variations in line voltage, components, initial tube characteristics, and tube characteristics during life.

\* Measured at load.

▲ Obtained preferably from a separate source modulated along with the plate supply, or from the modulated plate supply through a series resistor. It is recommended that this resistor be adjustable to obtain the desired operating plate current after initial tuning adjustments are made.

★ Obtained from a grid-No.1 resistor or from a combination of grid-No.1 resistor with either fixed supply or cathode resistor. The combination of grid-No.1 resistor and fixed supply has the advantage of not only protecting the tube from damage through loss of excitation but also of minimizing distortion by bias-supply compensation.

Special Ratings & Performance Data

HEATER-CYCLING LIFE PERFORMANCE


|  |           |        |
|--|-----------|--------|
| Cycles of Intermittent Operation ..... | 2000 min. | cycles |
|--|-----------|--------|

LOW-FREQUENCY VIBRATION PERFORMANCE

|                          |          |    |
|--------------------------|----------|----|
| RMS Output Voltage ..... | 200 max. | mV |
|--------------------------|----------|----|

BEAM POWER TUBE



**7558**  
INDUSTRIAL  
TYPE



9LK

Miniature type for use as a class C radio-frequency amplifier, oscillator, and frequency-multiplier up to 175 MHz in mobile communications equipment. Outlines section, 6E; requires miniature 9-contact socket. This type is identical with type 7551 except for heater voltage and current. Special ratings and performance data for the 7551 do not apply to the 7558.


|                      |         |        |
|----------------------|---------|--------|
| Heater Voltage ..... | 6.3 ±5% | volts  |
| Heater Current ..... | 0.8     | ampere |

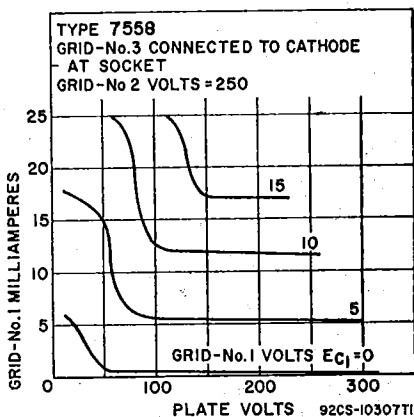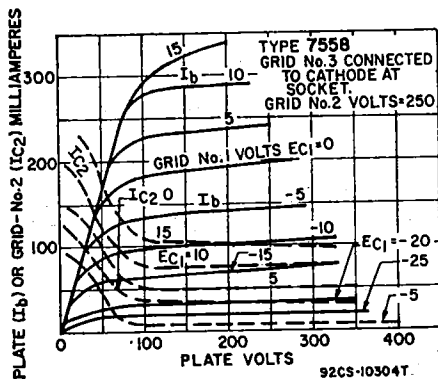

## 7581A

## BEAM POWER TUBE

Glass octal type used in af power-amplifier applications. Outlines section, 19D; requires octal socket. For typical operation as push-pull class  $A_1$ , class  $AB_1$ , and class  $AB_2$  amplifier, refer to type 6L6GC. This tube, like other power-handling tubes, should be adequately ventilated. Heater: volts (ac/dc), 6.3; amperes, 0.9; maximum heater-cathode volts,  $\pm 200$ .



### Class $A_1$ Amplifier

#### MAXIMUM RATINGS (Design-Maximum Values)

|                                 | Triode Connection* | Pentode Connection |       |
|---------------------------------|--------------------|--------------------|-------|
| Plate Voltage                   | 450                | 500                | volts |
| Grid-No.2 (Screen-Grid) Voltage | —                  | 450#               | volts |
| Plate Dissipation               | 35                 | 35                 | watts |
| Grid-No.2 Input                 | —                  | 5                  | watts |

#### MAXIMUM CIRCUIT VALUES

|                               |     |     |        |
|-------------------------------|-----|-----|--------|
| Grid-No.1-Circuit Resistance: |     |     |        |
| For fixed-bias operation      | 0.1 | 0.1 | megohm |
| For cathode-bias operation    | 0.5 | 0.5 | megohm |

### Class $A_1$ Amplifier (Pentode Connection)

#### MAXIMUM RATINGS (Same as for Class $A_1$ Amplifier)

#### TYPICAL OPERATION

|                             |            |       |            |
|-----------------------------|------------|-------|------------|
| Plate Voltage               | 70         | 250   | volts      |
| Grid-No.2 Voltage           | 300        | 250   | volts      |
| Grid-No.1 Voltage           | 0 $\Delta$ | -14   | volts      |
| Plate Resistance (Approx.)  | —          | 22500 | ohms       |
| Transconductance            | —          | 6000  | $\mu$ mhos |
| Plate Current               | 210        | 72    | mA         |
| Grid-No.2 Current           | 25         | 5     | mA         |
| Load Resistance             | —          | 2500  | ohms       |
| Total Harmonic Distortion   | —          | 10    | per cent   |
| Maximum-Signal Power Output | —          | 6.5   | watts      |

### Class $A_1$ Amplifier (Triode Connection)

#### MAXIMUM RATINGS (Same as for Class $A_1$ Amplifier)

#### TYPICAL OPERATION


|                           |   |     |       |
|---------------------------|---|-----|-------|
| Plate Voltage             | — | 250 | volts |
| Grid-No.1 Voltage         | — | -20 | volts |
| Peak AF Grid-No.1 Voltage | — | 20  | volts |

|   |      |            |
|---|------|------------|
| Amplification Factor .....                | 8    |            |
| Plate Resistance (Approx.) .....          | 1700 | ohms       |
| Transconductance .....                    | 4700 | $\mu$ mhos |
| Zero-Signal Plate Current .....           | 40   | mA         |
| Maximum-Signal Plate Current .....        | 44   | mA         |
| Load Resistance .....                     | 5000 | ohms       |
| Total Harmonic Distortion (Approx.) ..... | 5    | per cent   |
| Maximum-Signal Power Output .....         | 1.4  | watts      |

\* Grid No.2 connected to plate.

# In push-pull circuits where grid No.2 of each tube is connected to a tap on the plate winding of the output transformer, this maximum rating is 500 volts.

▲ Applied for short interval (2 seconds) so as not to damage tube.



INDEX—LARGE LUG  
●—SHORT PIN—IC

12AQ

MEDIUM-MU TRIODE

7586

INDUSTRIAL  
TYPE

Nuvistor type, medium-mu general purpose triode for use as an amplifier or oscillator at frequencies extending into the UHF region. Outlines section, 1; requires nuvistor socket.

|  |                |        |
|--|----------------|--------|
| Heater Voltage (ac/dc) .....                 | 6.3 $\pm$ 0.6  | volts  |
| Heater Current .....                         | 0.135          | ampere |
| Peak Heater-Cathode Voltage .....            | $\pm$ 100 max. | volts  |
| Direct Interelectrode Capacitance (Approx.): |                |        |
| Grid to Plate .....                          | 2.2            | pF     |
| Grid to Cathode, Heater, and Shell .....     | 4.2            | pF     |
| Plate to Cathode, Heater, and Shell .....    | 1.6            | pF     |
| Plate to Cathode .....                       | 0.26           | pF     |
| Heater to Cathode .....                      | 1.4            | pF     |

Industrial Service

MAXIMUM RATINGS (Absolute-Maximum Values)

For operation at any altitude

|                            |     |       |
|----------------------------|-----|-------|
| Plate Supply Voltage ..... | 330 | volts |
| Plate Voltage .....        | 110 | volts |
| Grid Voltage:              |     |       |
| Negative-bias value .....  | 55  | volts |
| Peak-positive value .....  | 4   | volts |
| Grid Current .....         | 2   | mA    |
| Cathode Current .....      | 15  | mA    |
| Plate Dissipation .....    | 1   | watt  |

MAXIMUM CIRCUIT VALUES

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-Circuit Resistance:*        |     |        |
| For fixed-bias operation .....   | 0.5 | megohm |
| For cathode-bias operation ..... | 1   | megohm |

\* For operation at metal-shell temperature of 150°C. For operation at other metal-shell temperatures, see Grid-Circuit Resistance Rating Chart.

Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|   |      |       |       |            |
|---|------|-------|-------|------------|
| Plate Supply Voltage .....                          | —    | —     | 75    | volts      |
| Plate Voltage .....                                 | 26.5 | 40    | —     | volts      |
| Grid Supply Voltage .....                           | 0    | 0     | 0     | volt       |
| Cathode Resistor .....                              | —    | —     | 100   | ohms       |
| Amplification Factor .....                          | 31   | 35    | 35    |            |
| Grid Resistor .....                                 | 0.5  | 0.5   | —     | megohm     |
| Plate Resistance (Approx.) .....                    | 4400 | 3000  | 3000  | ohms       |
| Transconductance .....                              | 7000 | 11500 | 11500 | $\mu$ mhos |
| Plate Current .....                                 | 2.8  | 7.5   | 10.5  | mA         |
| Grid Voltage (Approx.) for plate $\mu$ A = 10 ..... | —    | —     | —7    | volts      |



## Special Ratings &amp; Performance Data

## SHOCK RATING

Peak Impact Acceleration ..... 1000 max. g

## FATIGUE RATING

Peak Vibrational Acceleration ..... 2.5 max. g

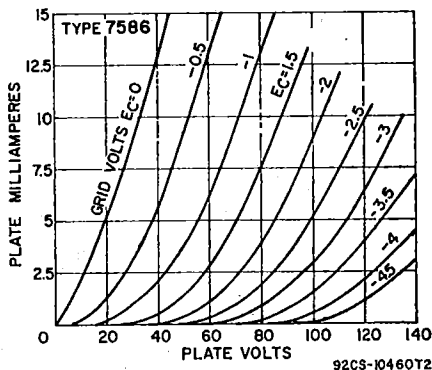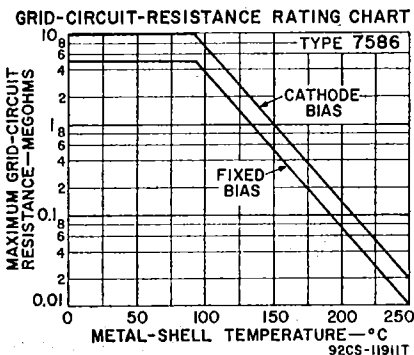


# 7587

INDUSTRIAL  
TYPE

## SHARP-CUTOFF TETRODE

Nuvistor type sharp-cutoff general-purpose tetrode for use in a wide variety of industrial applications. Outlines section, 1A1; requires nuvistor socket.

|  |  |
|--|--|
| Heater Voltage (ac/dc) .....                             |  |
| Heater Current .....                                     |  |
| Peak Heater-Cathode Voltage .....                        |  |
| Direct Interelectrode Capacitances:                      |  |
| Grid No.1 to Plate .....                                 |  |
| Grid No.1 to Cathode, Grid No.2, Shell, and Heater ..... |  |
| Plate to Cathode, Grid No.2, Shell, and Heater .....     |  |
| Heater to Cathode .....                                  |  |



INDEX—LARGE LUG  
• SHORT PIN—IC

## 12AS

|            |        |
|------------|--------|
| 6.3 ± 0.6  | volts  |
| 0.150      | ampere |
| ±100 max.  | volts  |
| 0.015 max. | pF     |
| 7.0        | pF     |
| 1.4        | pF     |
| 1.4        | pF     |

## Industrial Service

### MAXIMUM RATINGS (Absolute-Maximum Values)

For operation at any altitude

|  |     |       |
|--|-----|-------|
| Plate Supply Voltage .....                   | 330 | volts |
| Plate Voltage .....                          | 250 | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage ..... | 330 | volts |
| Grid-No.2 Voltage .....                      | 110 | volts |
| Grid-No.1 (Control-Grid) Voltage:            |     |       |
| Negative-bias value .....                    | 55  | volts |
| Peak-positive value .....                    | 2   | volts |
| Cathode Current .....                        | 20  | mA    |
| Grid-No.1 Current .....                      | 2   | mA    |
| Grid-No.2 Input .....                        | 0.2 | watt  |
| Plate Dissipation .....                      | 2.2 | watts |

## MAXIMUM CIRCUIT VALUES

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-Circuit Resistance:•        |     |        |
| For fixed-bias operation .....   | 0.5 | megohm |
| For cathode-bias operation ..... | 1   | megohm |


• For operation at metal-shell temperature up to 150°C.



**Class A<sub>1</sub> Amplifier**

**CHARACTERISTICS**

|  |       |            |
|--|-------|------------|
| Plate Supply Voltage .....                               | 125   | volts      |
| Grid-No.2 Supply Voltage .....                           | 50    | volts      |
| Cathode Resistor .....                                   | 68    | ohms       |
| Plate Resistance (Approx.) .....                         | 0.2   | megohm     |
| Transconductance .....                                   | 10600 | $\mu$ mhos |
| Plate Current .....                                      | 10    | mA         |
| Grid-No.2 Current .....                                  | 2.7   | mA         |
| Grid-No.1 Voltage (Approx.) for plate $\mu$ A = 10 ..... | -4.5  | volts      |

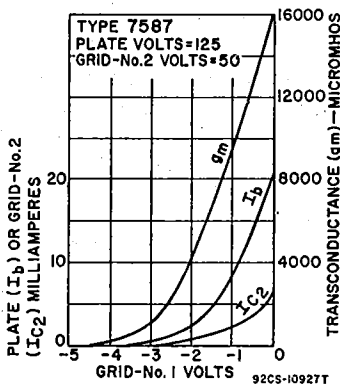

**Special Ratings & Performance Data**

**SHOCK RATING**

|                           |           |   |
|---------------------------|-----------|---|
| Impact Acceleration ..... | 1000 max. | g |
|---------------------------|-----------|---|

**FATIGUE RATING**


|                                |          |   |
|--------------------------------|----------|---|
| Vibrational Acceleration ..... | 2.5 max. | g |
|--------------------------------|----------|---|

Refer to chart at end of section.

**7591**

**POWER PENTODE**

**7591A**



Glass octal type used as audio-frequency power-output tube in high-quality audio applications. Outlines section, 13D; requires octal socket. Heater: volts (ac/dc), 6.3; amperes, 0.8; maximum heater-cathode volts,  $\pm 200$  peak, 100 average.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                       |      |       |
|---------------------------------------|------|-------|
| Plate Voltage .....                   | 550  | volts |
| Grid-No.2 (Screen-Grid) Voltage ..... | 440  | volts |
| Cathode Current .....                 | 90   | mA    |
| Plate Dissipation .....               | 19   | watts |
| Grid-No.2 Input .....                 | 3.3* | watts |

**TYPICAL OPERATION AND CHARACTERISTICS**

|  |     |       |
|--|-----|-------|
| Plate Voltage .....                    | 300 | volts |
| Grid-No.2 Voltage .....                | 300 | volts |
| Grid-No.1 (Control-Grid) Voltage ..... | -10 | volts |
| Peak AF Grid-No.1 Voltage .....        | 10  | volts |
| Zero-Signal Plate Current .....        | 60  | mA    |
| Maximum-Signal Plate Current .....     | 75  | mA    |
| Zero-Signal Grid-No.2 Current .....    | 8   | mA    |

|  |       |          |
|--|-------|----------|
| Maximum-Signal Grid-No.2 Current ..... | 15    | mA       |
| Triode Amplification Factor* .....     | 16.8  |          |
| Plate Resistance (Approx.) .....       | 29000 | ohms     |
| Transconductance .....                 | 10200 | μmhos    |
| Load Resistance .....                  | 3000  | ohms     |
| Total Harmonic Distortion .....        | 13    | per cent |
| Maximum-Signal Power Output .....      | 11    | watts    |

**MAXIMUM CIRCUIT VALUES**

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |        |
| For fixed-bias operation .....   | 0.3 | megohm |
| For cathode-bias operation ..... | 1   | megohm |

\* Grid-No.2 input may reach 6 watts during peak levels of speech and music signals.

\* Triode connection, grid No.2 connected to plate.

**Push-Pull Class AB<sub>1</sub> Amplifier****MAXIMUM RATINGS (Same as for Class A<sub>1</sub> Amplifier)**

| TYPICAL OPERATION (Values are for two tubes)     | Fixed Bias | Cathode Bias |            |
|--|------------|--------------|------------|
| Plate Supply Voltage .....                       | 350        | 450          | 450 volts  |
| Grid-No.2 Supply Voltage .....                   | 350        | 400          | 400 volts  |
| Grid-No.1 Supply Voltage .....                   | -15.5      | -21          | — volts    |
| Cathode-Bias Resistor                            |            |              |            |
| (Common to both cathodes) .....                  | —          | —            | 200 ohms   |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage .....     | 31         | 42           | 28 volts   |
| Zero-Signal Plate Current .....                  | 92         | 66           | 82 mA      |
| Maximum-Signal Plate Current .....               | 130        | 144          | 94 mA      |
| Zero-Signal Grid-No.2 Current .....              | 13         | 9.4          | 11.5 mA    |
| Maximum-Signal Grid-No.2 Current .....           | 28.6       | 30           | 22 mA      |
| Effective Load Resistance (Plate-to-plate) ..... | 6600       | 6600         | 9000 ohms  |
| Total Harmonic Distortion .....                  | 2          | 1.5          | 2 per cent |
| Maximum-Signal Power Output .....                | 30         | 45           | 28 watts   |

**7695**

Refer to chart at end of section.

**7717/6CY5**


Refer to chart at end of section.

**7724/14GT8**

Refer to chart at end of section.

**7868****POWER PENTODE**

Novar type used in output stages of high-fidelity audio amplifiers and radio receivers. **Outlines section, 11C or 30D;** requires novar 9-contact socket. This tube, like other power-handling tubes, should be adequately ventilated.

**9RW**


|  |          |        |
|--|----------|--------|
| Heater Voltage (ac/dc) .....                                 | 6.3      | volts  |
| Heater Current .....   | 0.8      | ampere |
| Heater-Cathode Voltage:                                      |          |        |
| Peak value .....   | ±200 max | volts  |
| Average value .....  | 100 max  | volts  |
| Direct Interelectrode Capacitances (Approx.):                |          |        |
| Grid No.1 to Plate .....                                     | 0.15     | pF     |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 ..... | 11       | pF     |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 .....     | 4.4      | pF     |

**Class A<sub>1</sub> Amplifier****MAXIMUM RATINGS (Design-Maximum Values)**

|   |      |       |
|---|------|-------|
| Plate Voltage .....                       | 550* | volts |
| Grid-No.2 (Screen-Grid) Voltage .....     | 440  | volts |
| Average Cathode Current .....             | 90   | mA    |
| Plate Dissipation .....                   | 19   | watts |
| Grid-No.2 Input .....                     | 3.3* | watts |
| Bulb Temperature (At hottest point) ..... | 240  | °C    |

**TYPICAL OPERATION AND CHARACTERISTICS**

|  |       |            |
|--|-------|------------|
| Plate Supply Voltage .....             | 300   | volts      |
| Grid-No.2 Voltage .....                | 300   | volts      |
| Grid-No.1 (Control-Grid) Voltage ..... | -10   | volts      |
| Peak AF Grid-No.1 Voltage .....        | 10    | volts      |
| Zero-Signal Plate Current .....        | 60    | mA         |
| Maximum-Signal Plate Current .....     | 75    | mA         |
| Zero-Signal Grid-No.2 Current .....    | 8     | mA         |
| Maximum-Signal Grid-No.2 Current ..... | 15    | mA         |
| Plate Resistance (Approx.) .....       | 29000 | ohms       |
| Transconductance .....                 | 10200 | $\mu$ mhos |
| Effective Load Resistance .....        | 3000  | ohms       |
| Total Harmonic Distortion .....        | 13    | per cent   |
| Maximum-Signal Power Output .....      | 11    | watts      |

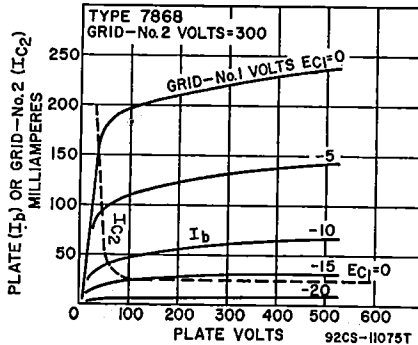

**MAXIMUM CIRCUIT VALUES**

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance:    |     |        |
| For fixed-bias operation .....   | 0.3 | megohm |
| For cathode-bias operation ..... | 1   | megohm |

- In push-pull circuits where the grid No.2 of each tube is connected to a tap on the plate winding of the output transformer, this maximum rating is 440 volts.
- Grid No.2 input may reach 6 watts during peak levels of speech and music signals.

**Push-Pull Class AB<sub>1</sub> Amplifier**

MAXIMUM RATINGS (Same as for class A<sub>1</sub> amplifier)

TYPICAL OPERATION (Values are for two tubes)

|   | Fixed Bias |       |      |       | Cathode Bias |       |          |
|---|------------|-------|------|-------|--------------|-------|----------|
| Plate Supply Voltage .....                            | 300        | 350   | 400  | 450   | 450          | 450   | volts    |
| Grid-No.2 Supply Voltage .....                        | 300        | 350   | 350  | 350   | 400          | 400   | volts    |
| Grid-No.1 Voltage .....                               | -12.5      | -15.5 | -16  | -16.5 | -21          | —     | volts    |
| Cathode-Bias Resistor (Common to both cathodes) ..... | —          | —     | —    | —     | —            | 170   | ohms     |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage .....          | 25         | 31    | 32   | 33    | 42           | 31    | volts    |
| Zero-Signal Plate Current .....                       | 74         | 72    | 64   | 60    | 40           | 86    | mA       |
| Maximum-Signal Plate Current .....                    | 116        | 130   | 135  | 142   | 145          | 94    | mA       |
| Zero-Signal Grid-No.2 Current .....                   | 10         | 9.5   | 8    | 7.2   | 5            | 10    | mA       |
| Maximum-Signal Grid-No.2 Current .....                | 28         | 32    | 28   | 26    | 30           | 20    | mA       |
| Effective Load Resistance (Plate-to-plate) .....      | 6600       | 6600  | 6600 | 6600  | 6600         | 10000 | ohms     |
| Total Harmonic Distortion .....                       | 5          | 2.5   | 2    | 2.5   | 5            | 2     | per cent |
| Maximum-Signal Power Output .....                     | 24         | 30    | 34   | 38    | 44           | 28    | watts    |

**Push-Pull Class AB<sub>1</sub> Amplifier**

Grid No.2 of Each Tube Connected to Tap on Plate Winding of Output Transformer\*

MAXIMUM RATINGS (Same as for class A<sub>1</sub> amplifier)

TYPICAL OPERATION (Values are for two tubes)

|   | Fixed Bias | Cathode Bias |       |
|---|------------|--------------|-------|
| Plate Supply Voltage .....                            | 400        | 425          | volts |
| Grid-No.2 Supply Voltage .....                        | —          | —            | volts |
| Grid-No.1 Voltage .....                               | -20.5      | —            | volts |
| Cathode-Bias Resistor (Common to both cathodes) ..... | —          | 185          | ohms  |

|  |      |      |          |
|--|------|------|----------|
| Peak AF Grid-No.1-to-Grid-No.1 Voltage .....     | 41   | 42   | volts    |
| Zero-Signal Plate Current .....                  | 60   | 88   | mA       |
| Maximum-Signal Plate Current .....               | 115  | 100  | mA       |
| Zero-Signal Grid-No.2 Current .....              | 8    | 12   | mA       |
| Maximum-Signal Grid-No.2 Current .....           | 18   | 16   | mA       |
| Effective Load Resistance (Plate-to-plate) ..... | 6600 | 6600 | ohms     |
| Total Harmonic Distortion .....                  | 2.5  | 3.5  | per cent |
| Maximum-Signal Power Output .....                | 23   | 21   | watts    |

\* Grid No.2 supply voltage is obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to apply 50 per cent of the plate signal voltage to the grid No.2 of each output tube.

## 7895

INDUSTRIAL  
TYPE

## HIGH-MU TRIODE

Nuvistor type high-mu triode for use in a wide variety of industrial applications. Outlines section, 1; requires nuvistor socket.

|   |           |        |
|---|-----------|--------|
| Heater Voltage (ac/dc) .....                  | 6.3 ±10%  | volts  |
| Heater Current .....                          | 0.135     | ampere |
| Peak Heater-Cathode Voltage .....             | ±100 max. | volts  |
| Direct Interelectrode Capacitances (Approx.): |           |        |
| Grid to Plate .....                           | 0.9       | pF     |
| Grid to Cathode, Shell, and Heater .....      | 4.2       | pF     |
| Plate to Cathode, Shell, and Heater .....     | 1.7       | pF     |
| Plate to Cathode .....                        | 0.22      | pF     |
| Heater to Cathode .....                       | 1.3       | pF     |

### Industrial Service

#### MAXIMUM RATINGS (Absolute-Maximum Values)

For operation at any altitude

|                            |     |       |
|----------------------------|-----|-------|
| Plate Supply Voltage ..... | 330 | volts |
| Plate Voltage .....        | 110 | volts |
| Grid Voltage:              |     |       |
| Negative-bias value .....  | 55  | volts |
| Peak-positive value .....  | 2   | volts |
| Grid Current .....         | 2   | mA    |
| Plate Current .....        | 20  | mA    |
| Cathode Current .....      | 15  | mA    |
| Plate Dissipation .....    | 1   | watt  |

#### MAXIMUM CIRCUIT VALUES

|                                  |     |        |
|----------------------------------|-----|--------|
| Grid-Circuit Resistance:*        |     |        |
| For fixed-bias operation .....   | 0.5 | megohm |
| For cathode-bias operation ..... | 1   | megohm |

\* For operation at metal-shell temperature up to 150°C.


### Class A<sub>1</sub> Amplifier

#### CHARACTERISTICS

|  |      |       |
|--|------|-------|
| Plate Supply Voltage .....                     | 110  | volts |
| Grid Supply Voltage .....                      | 0    | volts |
| Cathode Resistor .....                         | 150  | ohms  |
| Amplification Factor .....                     | 64   |       |
| Plate Resistance (Approx.) .....               | 6800 | ohms  |
| Transconductance .....                         | 9400 | μmhos |
| Plate Current .....                            | 7    | mA    |
| Grid Voltage (Approx.) for plate μA = 10 ..... | -4   | volts |


### Special Ratings & Performance Data

|                                |           |   |
|--------------------------------|-----------|---|
| <b>SHOCK RATING</b>            |           |   |
| Impact Acceleration .....      | 1000 max. | g |
| <b>FATIGUE RATING</b>          |           |   |
| Vibrational Acceleration ..... | 2.5 max.  | g |




INDEX-LARGE LUG  
● SHORT PIN-IC

12A2

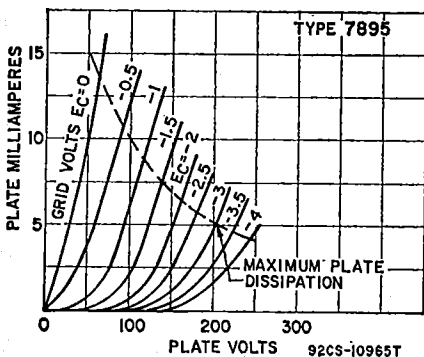

Refer to chart at end of section.

7898



9PB

BEAM POWER TUBE

7905

INDUSTRIAL TYPE

Miniature quick-heating-filament beam power tube for use as an RF oscillator, amplifier and frequency multiplier in mobile communications equipment. Outlines section, 6E; requires miniature 9-contact socket.

|   |  |        |
|---|--|--------|
| Operating Position .....                                  | Vertical, base up or down, or Horizontal with pins 2 and 8 in vertical plane |        |
| Filament Voltage .....                                    | 6.3 ± 10%  | volts  |
| Filament Current .....                                    | 0.65   | ampere |
| Heating Time .....  | Less than 1  | second |
| Direct Interelectrode Capacitances:                       |  |        |
| Grid No.1 to Plate .....                                  | 0.14 max.  | pF     |
| Grid No.1 to Filament, Grid No.3, and Grid No.2 .....     | 8.5  | pF     |
| Plate to Filament, Grid No.3, and Grid No.2 .....         | 5.5  | pF     |
| Bulb Temperature (At hottest point on bulb surface) ..... | 225 max.   | °C     |

MAXIMUM CIRCUIT VALUES

|                                    |     |        |
|------------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance ..... | 0.1 | megohm |
|------------------------------------|-----|--------|

Class A<sub>1</sub> Amplifier

CHARACTERISTICS

|   |                              |       |
|---|------------------------------|-------|
| Plate Voltage .....                     | 200                          | volts |
| Grid No.3 .....                         | Connected to pin 1 at socket |       |
| Grid-No.2 Voltage .....                 | 185                          | volts |
| Grid-No.1 Voltage .....                 | -6                           | volts |
| Mu-Factor, Grid No.2 to Grid No.1 ..... | 11.5                         |       |
| Transconductance .....                  | 6700                         | μmhos |
| Plate Current .....                     | 36                           | mA    |
| Grid-No.2 Current .....                 | 2.5                          | mA    |

RF Power Amplifier & Oscillator—Class C Telegraphy<sup>a</sup> and

RF Power Amplifier—Class C FM Telephony

MAXIMUM ICAS<sup>b</sup> RATINGS (Absolute-Maximum Values)

|   |                            |      |       |
|---|----------------------------|------|-------|
| DC Plate Voltage .....                          | Up to 175 MHz              | 300  | volts |
| Grid No.3 (Suppressor Grid) .....               | Connect to pin 1 at socket |      |       |
| DC Grid-No.2 (Screen-Grid) Supply Voltage ..... |                            | 300  | volts |
| DC Grid-No.2 Voltage .....                      |                            | 250  | volts |
| DC Grid-No.1 (Control-Grid) Voltage .....       |                            | -125 | volts |
| DC Plate Current .....                          |                            | 60   | mA    |
| DC Grid-No.2 Current .....                      |                            | 10   | mA    |

|                            |     |       |
|----------------------------|-----|-------|
| DC Grid-No.1 Current ..... | 5   | mA    |
| Plate Input .....          | 18  | watts |
| Grid-No.2 Input .....      | 1.5 | watts |
| Plate Dissipation .....    | 10  | watts |

**TYPICAL ICAS<sup>b</sup> OPERATION<sup>c</sup>**

As amplifier at 175 MHz

|  |           |                    |       |
|--|-----------|--------------------|-------|
| DC Plate Voltage .....   | 300       | 300                | volts |
| Grid No.3 .....  | Connected | to pin 1 at socket |       |
| DC Grid-No.2 Voltage <sup>d</sup> .....  | 160       | 185                | volts |
| DC Grid-No.1 Voltage <sup>e</sup> from a grid-No.1 resistor of 18,000 ohms ..... | -36       | -39                | volts |
| Peak RF Grid-No.1 Voltage .....  | 41        | 43                 | volts |
| DC Plate Current .....   | 50        | 60                 | mA    |
| DC Grid-No.2 Current .....   | 2.5       | 4                  | mA    |
| DC Grid-No.1 Current (Approx.) .....   | 2         | 2.2                | mA    |
| Driving Power <sup>f</sup> (Approx.) .....                                       | 1         | 1                  | watt  |
| Useful Power Output <sup>g</sup> (Approx.) .....                                 | 5.5       | 7                  | watts |

**Plate-Modulated RF Power Amplifier—Class C Telephony**

Carrier conditions per tube for use with a maximum modulation factor of 1

**MAXIMUM ICAS<sup>b</sup> RATINGS (Absolute-Maximum Values)**

|                            |               |                    |       |
|----------------------------|---------------|--------------------|-------|
|                            | Up to 175 MHz |                    |       |
| DC Plate Voltage .....     | 250           |                    | volts |
| Grid No.3 .....            | Connected     | to pin 1 at socket |       |
| DC Grid-No.2 Voltage ..... | 250           |                    | volts |
| DC Grid-No.1 Voltage ..... | -125          |                    | volts |
| DC Plate Current .....     | 60            |                    | mA    |
| DC Grid-No.2 Current ..... | 10            |                    | mA    |
| DC Grid-No.1 Current ..... | 5             |                    | mA    |
| Plate Input .....          | 15            |                    | watts |
| Grid-No.2 Input .....      | 1.4           |                    | watts |
| Plate Dissipation .....    | 7             |                    | watts |

**TYPICAL ICAS<sup>b</sup> OPERATION<sup>c</sup>**

At 175 MHz

|   |           |                    |       |
|---|-----------|--------------------|-------|
| DC Plate Voltage .....  | 250       |                    | volts |
| Grid No.3 .....   | Connected | to pin 1 at socket |       |
| DC Grid-No.2 Voltage <sup>b</sup> .....                                       | 250       |                    | volts |
| DC Grid-No.1 Voltage <sup>e</sup> from a grid-No.1 resistor of 33,000 ohms .. | -70       |                    | volts |
| Peak RF Grid-No.1 Voltage .....   | 75        |                    | volts |
| DC Plate Current .....  | 60        |                    | mA    |
| DC Grid-No.2 Current .....  | 2.5       |                    | mA    |
| DC Grid-No.1 Current (Approx.) .....  | 2.1       |                    | mA    |
| Driving Power <sup>f</sup> (Approx.) .....                                    | 1         |                    | watt  |
| Useful Power Output <sup>g</sup> (Approx.) .....                              | 6.5       |                    | watts |

**Frequency Multiplier****MAXIMUM ICAS<sup>b</sup> RATINGS (Absolute-Maximum Values)**

|                                   |           |                    |       |
|-----------------------------------|-----------|--------------------|-------|
| DC Plate Voltage .....            | 300       |                    | volts |
| Grid No.3 .....                   | Connected | to pin 1 at socket |       |
| DC Grid-No.2 Supply Voltage ..... | 300       |                    | volts |
| DC Grid-No.2 Voltage .....        | 250       |                    | volts |
| DC Grid-No.1 Voltage .....        | -125      |                    | volts |
| DC Plate Current .....            | 50        |                    | mA    |
| DC Grid-No.2 Current .....        | 10        |                    | mA    |
| DC Grid-No.1 Current .....        | 5         |                    | mA    |
| Plate Input .....                 | 15        |                    | watts |
| Grid-No.2 Input .....             | 1.5       |                    | watts |
| Plate Dissipation .....           | 10        |                    | watts |

**TYPICAL ICAS<sup>b</sup> OPERATION<sup>c</sup>**

As doubler to 175 MHz

|  |           |                    |       |
|--|-----------|--------------------|-------|
| DC Plate Voltage .....   | 250       | 300                | volts |
| Grid No.3 .....  | Connected | to pin 1 at socket |       |
| DC Grid-No.2 Voltage <sup>d</sup> .....  | 200       | 215                | volts |
| DC Grid-No.1 Voltage <sup>e</sup> from a grid-No.1 resistor of 53,000 ohms ..... | -53       | -80                | volts |
| Peak RF Grid-No.1 Voltage .....  | 60        | 87                 | volts |
| DC Plate Current .....   | 45        | 50                 | mA    |
| DC Grid-No.2 Current .....   | 3.4       | 3.4                | mA    |
| DC Grid-No.1 Current (Approx.) .....   | 1         | 1.5                | mA    |
| Driving Power <sup>f</sup> (Approx.) .....                                       | 0.4       | 0.5                | watt  |
| Useful Power Output <sup>j</sup> (Approx.) .....                                 | 2.5       | 3.5                | watts |

As tripler to 175 MHz

|   |                              |      |       |
|---|------------------------------|------|-------|
| DC Plate Voltage  | 250                          | 250  | volts |
| Grid No.3   | Connected to pin 1 at socket |      |       |
| DC Grid-No.2 Voltage <sup>d</sup>                               | 180                          | 225  | volts |
| DC Grid-No.1 Voltage <sup>e</sup> from a grid-No.1 resistor of: |                              |      |       |
| 50,000 ohms   | -90                          | -    | volts |
| 60,000 ohms   | -                            | -108 | volts |
| Peak RF Grid-No.1 Voltage                                       | 105                          | 118  | volts |
| DC Plate Current  | 40                           | 50   | mA    |
| DC Grid-No.2 Current  | 2.5                          | 3.4  | mA    |
| DC Grid-No.1 Current (Approx.)                                  | 1.8                          | 1.8  | mA    |
| Driving Power <sup>f</sup> (Approx.)                            | 0.4                          | 0.6  | watt  |
| Useful Power Output <sup>g</sup> (Approx.)                      | 1.4                          | 2    | watts |

<sup>a</sup> Key-down conditions per tube without amplitude modulation. Amplitude modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115 per cent of the carrier conditions.

<sup>b</sup> Intermittent Commercial and Amateur Service.

<sup>c</sup> Pins 4 and 5 at rf ground.



<sup>d</sup> Obtained preferably from a separate source or from the plate-voltage supply with a voltage divider. If a series resistor is used, it should be adjustable to permit obtaining the desired operating plate current after initial tuning adjustments are completed.

<sup>e</sup> Obtained from a grid-No.1 resistor, or from a combination of grid-No.1 resistor and either fixed supply or cathode resistor. The combination of grid-No.1 resistor and fixed supply has the advantage of not only protecting the tube from damage through loss of excitation but also of minimizing distortion by bias-supply compensation.

<sup>f</sup> Driving power includes circuit losses and is the actual power measured at the input to the grid circuit.

<sup>g</sup> Measured at load.

<sup>h</sup> Obtained preferably from a separate source modulated along with the plate supply, or from the modulated plate supply through a series resistor. It is recommended that this resistor be adjustable to permit obtaining the desired operating plate current after initial tuning adjustments are made.

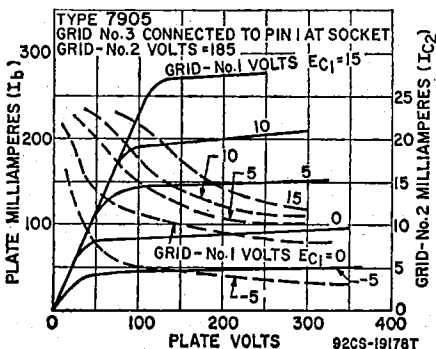

INDEX - LARGE LUG  
 ● - SHORT PIN - IC

12AQ

MEDIUM-MU TRIODE

8056  
 INDUSTRIAL  
 TYPE

Nuvisor type, medium-mu triode for use in low voltage industrial applications. Outlines section, 1; requires nuvisor socket.

|                             |           |        |
|-----------------------------|-----------|--------|
| Heater Voltage (ac/dc)      | 6.3 ± 0.6 | volts  |
| Heater Current              | 0.135     | ampere |
| Peak Heater-Cathode Voltage | ±100      | volts  |

## Direct Interelectrode Capacitances (Approx.):

|                                     |      |    |
|-------------------------------------|------|----|
| Grid to Plate                       | 2.1  | pF |
| Grid to Cathode, Shell, and Heater  | 4.0  | pF |
| Plate to Cathode, Shell, and Heater | 1.7  | pF |
| Plate to Cathode                    | 0.34 | pF |
| Heater to Cathode                   | 1.4  | pF |

## Industrial Service

## MAXIMUM RATINGS (Absolute-Maximum Values)

For operation at any altitude

|                     |      |       |
|---------------------|------|-------|
| Plate Voltage       | 50   | volts |
| Grid Voltage:       |      |       |
| Negative-bias value | 55   | volts |
| Peak-positive value | 2    | volts |
| Grid Current        | 2    | mA    |
| Cathode Current     | 15   | mA    |
| Plate Dissipation   | 0.45 | watt  |

## TYPICAL OPERATION

|                            |       |      |            |
|----------------------------|-------|------|------------|
| Plate Supply Voltage       | 12    | 24   | volts      |
| Grid Supply Voltage        | —     | 0.7  | volt       |
| Grid Resistor              | 33000 | —    | ohms       |
| Amplification Factor       | 12    | 12   |            |
| Plate Resistance (Approx.) | 1500  | 1500 | ohms       |
| Transconductance           | 8000  | 8000 | $\mu$ mhos |
| Plate Current              | 5.5   | 9.5  | mA         |

## MAXIMUM CIRCUIT VALUES

|                            |    |         |
|----------------------------|----|---------|
| Grid-Circuit Resistance:*  |    |         |
| For fixed-bias operation   | 10 | megohms |
| For cathode-bias operation | 10 | megohms |

\* For operation at metal-shell temperatures up to 150°C. For operation at other metal-shell temperatures, see Grid-Circuit Resistance Rating Chart.

Class A<sub>1</sub> Amplifier

## CHARACTERISTICS

|   |   |            |
|---|---|------------|
| Plate Supply Voltage                          | 24  | volts      |
| Grid  | Connected to negative end of cathode resistor |            |
| Cathode Resistor                              | 100   | ohms       |
| Amplification Factor                          | 11.5  |            |
| Plate Resistance (Approx.)                    | 1530  | ohms       |
| Transconductance                              | 7500  | $\mu$ mhos |
| Plate Current                                 | 8.7   | mA         |
| Grid Voltage (Approx.) for plate $\mu$ A = 50 | —5  | volts      |



## Special Ratings &amp; Performance Data

## SHOCK RATING

|                     |           |   |
|---------------------|-----------|---|
| Impact Acceleration | 1000 max. | g |
|---------------------|-----------|---|

## FATIGUE RATING

|                          |          |   |
|--------------------------|----------|---|
| Vibrational Acceleration | 2.5 max. | g |
|--------------------------|----------|---|

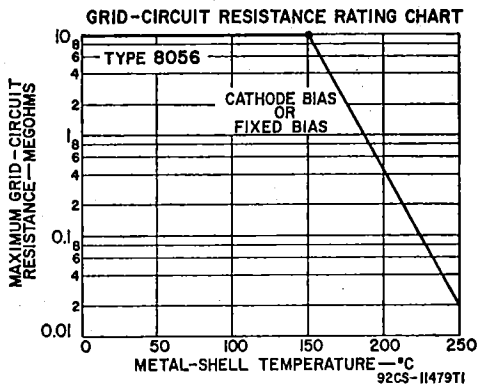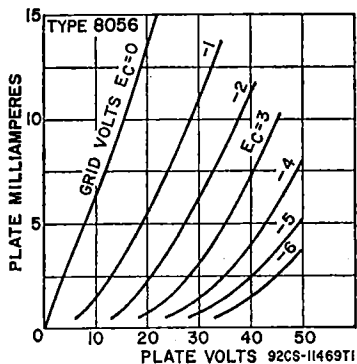




Refer to chart at end of section.

8058

**8077/7054**  
INDUSTRIAL  
TYPE

**POWER PENTODE**



**9GK**

Miniature type for use as a class C radio-frequency amplifier, oscillator and frequency multiplier up to 40 MHz in mobile communications equipment. Outlines section, 6B; requires miniature 9-contact socket.

|  |           |        |
|--|-----------|--------|
| Heater Voltage                                 | 13.5 ±1.5 | volts  |
| Heater Current                                 | 0.275     | ampere |
| Peak Heater-Cathode Voltage                    | ±120 max. | volts  |
| Direct Interelectrode Capacitances (Approx.):  |           |        |
| Grid No.1 to Plate                             | 0.063     | pF     |
| Grid No.1 to all other Electrodes except Plate | 10.2      | pF     |
| Plate to all other Electrodes except Grid No.1 | 3.5       | pF     |

**Class A<sub>1</sub>—AF Power Amplifier**

**MAXIMUM RATINGS (Absolute-Maximum Values)**

|                                   |                                |       |
|-----------------------------------|--------------------------------|-------|
| Plate Voltage                     | 330                            | volts |
| Grid-No.3 (Suppressor-Grid)       | Connected to cathode at socket |       |
| Grid-No.2 (Screen-Grid) Voltage   | 180                            | volts |
| Grid-No.1 (Control-Grid) Voltage: |                                |       |
| Negative-bias value               | 55                             | volts |
| Positive-bias value               | 0                              | volt  |
| Grid-No.2 Input                   | 1                              | watt  |
| Plate Dissipation                 | 5                              | watts |

**MAXIMUM CIRCUIT VALUES**

|                               |      |        |
|-------------------------------|------|--------|
| Grid-No.1-Circuit Resistance: |      |        |
| For fixed-bias operation      | 0.1  | megohm |
| For cathode-bias operation    | 0.25 | megohm |

**CHARACTERISTICS**

|   |                                |        |
|---|--------------------------------|--------|
| Heater Voltage                                | 13.5                           | volts  |
| Plate Supply Voltage                          | 250                            | volts  |
| Grid No.3                                     | Connected to cathode at socket |        |
| Grid No.2 Supply Voltage                      | 150                            | volts  |
| Cathode Resistor                              | 120                            | ohms   |
| Plate Resistance (Approx.)                    | 0.1                            | megohm |
| Transconductance                              | 11500                          | μmhos  |
| Plate Current                                 | 19                             | mA     |
| Grid-No.2 Current                             | 3.5                            | mA     |
| Grid-No.1 Voltage (Approx.) for plate μA = 20 | -10                            | volts  |

**RF Power Amplifier & Oscillator—Class C Telegraphy<sup>a</sup>**  
**and**  
**RF Power Amplifier—Class C FM Telephony**

**MAXIMUM CCS<sup>b</sup> RATINGS (Absolute-Maximum Values)**

|                                      |                                |       |
|--------------------------------------|--------------------------------|-------|
| DC Plate Voltage                     | 300                            | volts |
| DC Grid No.3 (Suppressor-Grid)       | Connected to cathode at socket |       |
| DC Grid-No.2 (Screen-Grid) Voltage   | 175                            | volts |
| DC Grid-No.1 (Control-Grid) Voltage: |                                |       |
| Negative-bias value                  | 50                             | volts |
| DC Plate Current                     | 33                             | mA    |
| DC Grid-No.2 Current                 | 5.5                            | mA    |
| DC Grid-No.1 Current                 | 3                              | mA    |
| Grid-No.2 Input                      | 1                              | watt  |
| Plate Dissipation                    | 5                              | watts |

**TYPICAL OPERATION**

At frequencies up to 40 MHz

|                      |                                |     |     |       |
|----------------------|--------------------------------|-----|-----|-------|
| DC Plate Voltage     | 200                            | 250 | 300 | volts |
| Grid No.3            | Connected to cathode at socket |     |     |       |
| DC Grid-No.2 Voltage | 115                            | 145 | 175 | volts |
| DC Grid-No.1 Voltage | -7                             | -9  | -12 | volts |

|                                      |      |      |     |       |
|--------------------------------------|------|------|-----|-------|
| Peak RF Grid-No.1 Voltage .....      | 9    | 11   | 16  | volts |
| DC Plate Current .....               | 14.5 | 20   | 26  | mA    |
| DC Grid-No.2 Current .....           | 3    | 4.1  | 5.5 | mA    |
| DC Grid-No.1 Current (Approx.) ..... | 0.6  | 0.85 | 1   | mA    |

**MAXIMUM CIRCUIT VALUE**

|                                    |     |        |
|------------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance ..... | 0.1 | megohm |
|------------------------------------|-----|--------|

**Frequency Multiplier****MAXIMUM CCS<sup>a</sup> RATINGS (Absolute-Maximum Values)**

Same as for RF POWER AMPLIFIER &amp; OSCILLATOR

**TYPICAL OPERATION**

As doubler up to 40 MHz


|                                      |                                |      |     |       |
|--------------------------------------|--------------------------------|------|-----|-------|
| DC Plate Voltage .....               | 200                            | 250  | 300 | volts |
| Grid No.3 .....                      | Connected to cathode at socket |      |     |       |
| DC Grid-No.2 Voltage .....           | 115                            | 145  | 175 | volts |
| DC Grid-No.1 Voltage .....           | -16                            | -20  | -25 | volts |
| Peak RF Grid-No.1 Voltage .....      | 19                             | 24   | 31  | volts |
| DC Plate Current .....               | 11                             | 15   | 20  | mA    |
| DC Grid-No.2 Current .....           | 2                              | 3    | 4   | mA    |
| DC Grid-No.1 Current (Approx.) ..... | 0.3                            | 0.45 | 0.6 | mA    |
| Driving Power (Approx.) .....        | 5                              | 9    | 13  | mW    |
| Useful Power Output (Approx.) .....  | 1.4                            | 1.9  | 2.5 | watts |

**MAXIMUM CIRCUIT VALUE**

|                                    |     |        |
|------------------------------------|-----|--------|
| Grid-No.1-Circuit Resistance ..... | 0.1 | megohm |
|------------------------------------|-----|--------|

<sup>a</sup> Key-down conditions per tube without amplitude modulation. Amplitude modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115 per cent of the carrier conditions.

<sup>b</sup> Continuous Commercial Service.

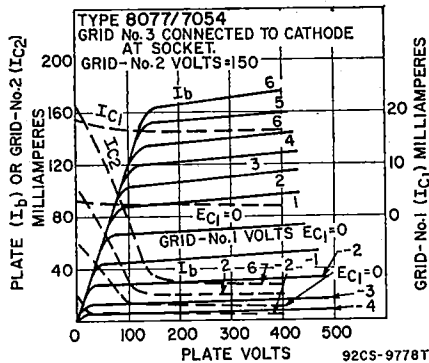**8136**


Refer to chart at end of section.

**8203**


Refer to chart at end of section.

**8393****INDUSTRIAL  
TYPE****MEDIUM-MU TRIODE**

Nuvistor type, medium-mu general purpose triode for use as an amplifier or oscillator at frequencies extending into the UHF region. Outlines section, 1; requires nuvistor socket. The 8393 is the same as the 7586 except for the following items:

**12AQ**

|  |           |        |
|--|-----------|--------|
| Heater Voltage (ac/dc)                       | 13.5 ±1.4 | volts  |
| Heater Current                               | 0.060     | ampere |
| Peak Heater-Cathode Voltage                  | ±100 max. | volts  |
| Direct Interelectrode Capacitance (Approx.): |           |        |
| Grid to Plate                                | 2.4       | pF     |
| Grid to Cathode, Heater, and Shell           | 4.4       | pF     |
| Plate to Cathode, Heater, and Shell          | 1.6       | pF     |
| Plate to Cathode                             | 0.26      | pF     |
| Heater to Cathode                            | 1.7       | pF     |



8LY

**BEAM POWER TUBE**

**8417**

Glass octal type used as output amplifier in high-fidelity, high-power sound systems. Outlines section, 19J; requires octal socket. This tube, like other power-handling tubes, should be adequately ventilated. Heater: volts (ac/dc), 6.3; amperes, 1.6; maximum heater-cathode volts, ±200 peak, 100 average.

**Class A<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Design-Maximum Values)**

|                                 |     |       |
|---------------------------------|-----|-------|
| Plate Voltage                   | 660 | volts |
| Grid-No.2 (Screen-Grid) Voltage | 500 | volts |
| Cathode Current                 | 200 | mA    |
| Plate Dissipation*              | 85  | watts |
| Grid-No.2 Input                 | 5*  | watts |

**CHARACTERISTICS**

|   |       |       |
|---|-------|-------|
| Plate Voltage                               | 300   | volts |
| Grid-No.2 Voltage                           | 300   | volts |
| Grid-No.1 (Control-Grid) Voltage            | -12   | volts |
| Grid-No.1 Voltage for plate current of 1 mA | -37   | volts |
| Plate Resistance                            | 16000 | ohms  |
| Transconductance                            | 23000 | μmhos |
| Plate Current                               | 100   | mA    |
| Grid-No.2 Current                           | 5.5   | mA    |
| Triode Amplification Factor                 | 16.5  |       |

**MAXIMUM CIRCUIT VALUES**

|                               |      |        |
|-------------------------------|------|--------|
| Grid-No.1-Circuit Resistance: |      |        |
| For fixed-bias operation      | 1    | megohm |
| For cathode-bias operation    | 0.25 | megohm |

**Push-Pull Class AB<sub>1</sub> Amplifier**

**MAXIMUM RATINGS (Same as for Class A<sub>1</sub> Amplifier)**

**TYPICAL OPERATION (Values are for two tubes)**

|                                  |      |       |          |
|----------------------------------|------|-------|----------|
| Plate Supply Voltage             | 400  | 560   | volts    |
| Grid-No.2 Supply Voltage         | 275  | 300   | volts    |
| Grid-No.1 Voltage                | -13  | -15.5 | volts    |
| Peak AF Grid-to-Grid Voltage     | 24   | 31    | volts    |
| Zero-Signal Plate Current        | 150  | 100   | mA       |
| Maximum-Signal Plate Current     | 294  | 270   | mA       |
| Zero-Signal Grid-No.2 Current    | 4.4  | 3.4   | mA       |
| Maximum-Signal Grid-No.2 Current | 34   | 31    | mA       |
| Effective Load (Plate-to-Plate)  | 2800 | 4200  | ohms     |
| Total Harmonic Distortion        | 2.5  | 2     | per cent |
| Maximum Signal Power Output      | 65   | 100   | watts    |

\* A bias resistor or other means is required to protect the tube in absence of excitation.

\* Grid-No.2 may reach 8 watts during peak levels of speech and music levels.

Refer to chart at end of section.

**8532**


Refer to chart at end of section.

**8532/6J4WA**

|                  |                                   |
|------------------|-----------------------------------|
| <b>8532W</b>     | Refer to chart at end of section. |
| <b>8627</b>      | Refer to chart at end of section. |
| <b>8627A</b>     | Refer to chart at end of section. |
| <b>8628</b>      | Refer to chart at end of section. |
| <b>8808</b>      | Refer to chart at end of section. |
| <b>9001</b>      | Refer to chart at end of section. |
| <b>9002</b>      | Refer to chart at end of section. |
| <b>9003</b>      | Refer to chart at end of section. |
| <b>9005</b>      | Refer to chart at end of section. |
| <b>9006</b>      | Refer to chart at end of section. |
| <b>EM84/6FG6</b> | Refer to chart at end of section. |
| <b>DY87</b>      | Refer to type 1S2A/DY87.          |
| <b>EABC80</b>    | Refer to type 6AK8/EABC8.         |
| <b>EBF89</b>     | Refer to type 6DC8/EBF89.         |
| <b>EC88</b>      | Refer to type 6DL4/EC88.          |
| <b>EC97</b>      | Refer to type 6FY5/EC97.          |
| <b>ECC81</b>     | Refer to type 12AT7/ECC81.        |
| <b>ECC82</b>     | Refer to type 12AU7A/ECC82.       |
| <b>ECC83</b>     | Refer to type 12AX7A/ECC83.       |
| <b>ECC85</b>     | Refer to type 6AQ8/ECC85.         |
| <b>ECC189</b>    | Refer to type 6ES8/ECC189.        |
| <b>ECF80</b>     | Refer to type 6BL8/ECF80.         |
| <b>ECF86</b>     | Refer to type 6HG8/ECF86.         |
| <b>ECF200</b>    | Refer to type 6X9/ECF200.         |
| <b>ECF201</b>    | Refer to type 6U9/ECF201.         |
| <b>ECF801</b>    | Refer to type 6GJ7/ECF801.        |
| <b>ECF802</b>    | Refer to type 6JW8/ECF802.        |
| <b>ECL82</b>     | Refer to type 6BM8/ECL82.         |
| <b>ECL84</b>     | Refer to type 6DX8/ECL84.         |
| <b>ECL85</b>     | Refer to type 6GV8/ECL85.         |
| <b>ECL86</b>     | Refer to type 6GW3/ECL86.         |

|                            |               |
|----------------------------|---------------|
| Refer to type 6AM6/EF91.   | <b>EF91</b>   |
| Refer to type 6BA6/EF93.   | <b>EF93</b>   |
| Refer to type 6AK5/EF95.   | <b>EF95</b>   |
| Refer to type 6EH7/EF183.  | <b>EF183</b>  |
| Refer to type 6EJ7/EF184.  | <b>EF184</b>  |
| Refer to type 6X9/EFL200.  | <b>EFL200</b> |
| Refer to type 6CA7/EL34.   | <b>EL34</b>   |
| Refer to type 6BQ5/EL84.   | <b>EL84</b>   |
| Refer to type 6CW5/EL86.   | <b>EL86</b>   |
| Refer to type 6DL5/EL95.   | <b>EL95</b>   |
| Refer to type 6GB5/EL500.  | <b>EL500</b>  |
| Refer to type 6KG6A/EL509. | <b>EL509</b>  |
| Refer to type 6HU8/ELL80.  | <b>ELL80</b>  |
| Refer to type 6FG6/EM84.   | <b>EM84</b>   |
| Refer to type 6HU6/EM87.   | <b>EM87</b>   |
| Refer to type 6AL3/EY88.   | <b>EY88</b>   |
| Refer to type 6EC4A/EY500. | <b>EY500</b>  |
| Refer to type 5AR4/GZ34.   | <b>GZ34</b>   |
| Refer to type 17EW8/HCC85. | <b>HCC85</b>  |
| Refer to type 6LN8/LCF80.  | <b>LCF80</b>  |
| Refer to type 5HG8/LCF86.  | <b>LCF86</b>  |
| Refer to type 5U9/LCF201.  | <b>LCF201</b> |
| Refer to type 5GJ7/LCF801. | <b>LCF801</b> |
| Refer to type 6LX8/LCF802. | <b>LCF802</b> |
| Refer to type 10DX8/LCL84. | <b>LCL84</b>  |
| Refer to type 10GV8/LCL85. | <b>LCL85</b>  |
| Refer to type 4EH7/LF183.  | <b>LF183</b>  |
| Refer to type 4EJ7/LF184.  | <b>LF184</b>  |
| Refer to type 11Y9/LFL200. | <b>LFL200</b> |
| Refer to type 10CW5/LL86.  | <b>LL86</b>   |
| Refer to type 18GB5/LL500. | <b>LL500</b>  |

|               |                             |
|---------------|-----------------------------|
| <b>LY88</b>   | Refer to type 20AQ3/LY88.   |
| <b>PC900</b>  | Refer to type 4HA5/PC900.   |
| <b>PCC85</b>  | Refer to type 9AQ8/PCC85.   |
| <b>PCC88</b>  | Refer to type 7DJ8/PCC88.   |
| <b>PCF80</b>  | Refer to type 9A8/PCF80.    |
| <b>PCF86</b>  | Refer to type 7HG8/PCF86.   |
| <b>PCF801</b> | Refer to type 8GJ7/PCF801.  |
| <b>PCF802</b> | Refer to type 9JW8/PCF802.  |
| <b>PCL82</b>  | Refer to type 16A8/PCL82.   |
| <b>PCL84</b>  | Refer to type 15DQ8/PCL84.  |
| <b>PCL85</b>  | Refer to type 6GV8/PCL85.   |
| <b>PL36</b>   | Refer to type 25E5/PL36.    |
| <b>PL84</b>   | Refer to type 15CW5/PL84.   |
| <b>PL500</b>  | Refer to type 27GB5/PL500.  |
| <b>PL509</b>  | Refer to type 40KG6A/PL509. |
| <b>PL521</b>  | Refer to type 29KQ6/PL521.  |
| <b>PY81</b>   | Refer to type 17Z3/PY81.    |
| <b>PY88</b>   | Refer to type 30AE3/PY88.   |
| <b>PY500</b>  | Refer to type 42EC4A/PY500. |
| <b>UCL82</b>  | Refer to type 50BM8/UCL82.  |
| <b>XCC189</b> | Refer to type 4ES8/XCC189.  |
| <b>XCF80</b>  | Refer to type 4BL8/XCF80.   |
| <b>XCF801</b> | Refer to type 4GJ7/XCF801.  |
| <b>XCL85</b>  | Refer to type 9GV8/XCL85.   |
| <b>XF183</b>  | Refer to type 3EH7/XF183.   |
| <b>XF184</b>  | Refer to type 3EJ7/XF184.   |
| <b>XL86</b>   | Refer to type 8CW5/XL86.    |
| <b>XL500</b>  | Refer to type 13GB5/XL500.  |
| <b>XY88</b>   | Refer to type 16AQ3/XY88.   |
| <b>YCC189</b> | Refer to type 5ES8/YCC189.  |

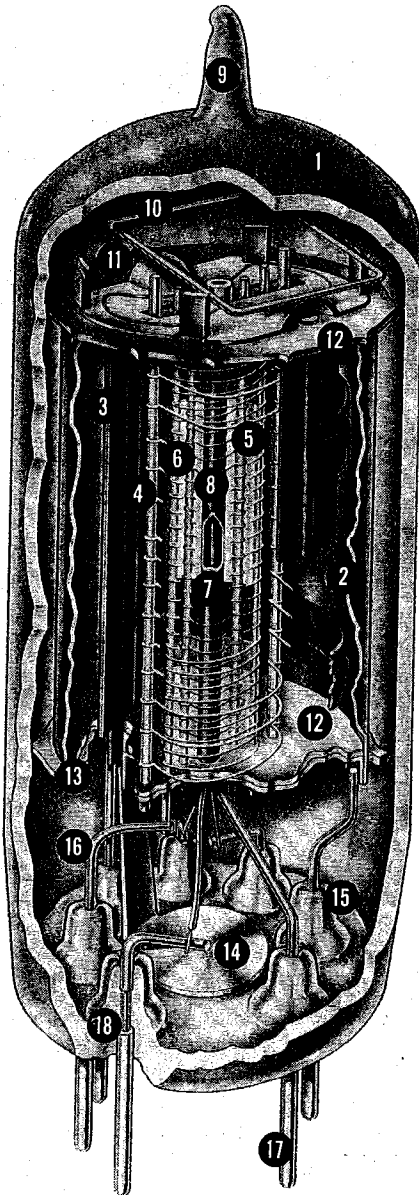

- 1—Glass Envelope
- 2—Internal Shield
- 3—Plate
- 4—Grid No. 3 (Suppressor)
- 5—Grid No. 2 (Screen)
- 6—Grid No. 1 (Control Grid)
- 7—Cathode
- 8—Heater
- 9—Exhaust Tip
- 10—Getter
- 11—Spacer Shield Header
- 12—Insulating Spacer
- 13—Spacer Shield
- 14—Inter-Pin Shield
- 15—Glass Button-Stem Seal
- 16—Lead Wire
- 17—Base Pin
- 18—Glass-to-Metal Seal

Structure of a Miniature Tube

# Characteristics Entertainment and Industrial

*Key to Chart:* Type numbers shown in light face are discontinued types. Type numbers shown in bold face are available for replacement use, but are not recommended for new equipment design. Outline numbers refer to diagrams shown in

| RCA<br>Type | Name                        | Out-<br>line | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |         | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|-------------|-----------------------------|--------------|--------------------------|---------------------------|---------|--|
|             |                             |              |                          | Volts                     | Amperes |  |
| OA2WA♦      | Glow-Discharge Tube         | 5D           | 5B0                      | —                         | —       | Voltage Regulator  |
| OA3♦        | Glow-Discharge Tube         | 22           | 4A1                      | —                         | —       | Voltage Regulator  |
| OA3A♦       |                             | 13C          |                          |                           |         |  |
| OA4A♦       | Gas-Triode                  | 22           | 4V                       | —                         | —       | Relay Circuits   |
| OB2WA♦      | Glow-Discharge Tube         | 5D           | 5B0                      | —                         | —       | Voltage Regulator  |
| OC2♦        | Glow-Discharge Tube         | 5D           | 5B0                      | —                         | —       | Voltage Regulator  |
| OC3A♦       | Glow-Discharge Tube         | 13C          | 4A1                      | —                         | —       | Voltage Regulator  |
| OD3A♦       | Glow-Discharge Tube         | 13C          | 4A1                      | —                         | —       | Voltage Regulator  |
| OZ4         | Full-Wave Gas Rectifier     | 2A           | 4R                       | —                         | —       | Rectifier  |
| OZ4G        | Full-Wave Gas Rectifier     | 29D          | 4R                       | —                         | —       | Rectifier  |
| 1A3         | Diode                       | 5C           | 5AP                      | 1.4                       | 0.15    | Rectifier  |
| 1A4P        | Remote-Cutoff Pentode       | 24B          | 4M                       | 2.0F                      | 0.06    | Class A Amplifier  |
| 1A5GT       | Power Pentode               | 13D          | 6X                       | 1.4F                      | 0.05    | Class A Amplifier  |
| 1A6         | Pentagrid Converter         | 24B          | 6L                       | 2.0F                      | 0.06    | Converter  |
| 1A7GT       | Pentagrid Converter         | 14A          | 7Z                       | 1.4F                      | 0.05    | Converter  |
| 1AC5        | Power Converter             | 29A          | 8CP                      | 1.25F                     | 0.04    | Class A Amplifier  |
| ★1AD2       | Half-Wave Rectifier         | 9A           | 12GV                     | 1.25F                     | 0.2     | Pulsed Rectifier In<br>TV Receivers  |
| 1AD5        | Sharp-Cutoff Pentode        | 29A          | 8CP                      | 1.25F                     | 0.04    | Class A Amplifier  |
| 1AX2        | Half-Wave Rectifier         | 7A           | 9Y                       | 1.4F                      | 0.65    | Pulsed Rectifier In TV Receivers   |
| ★1AY2       | Half-Wave Rectifier         | 33A          | 1AY2                     | 1.25F                     | 0.2     | Pulsed Rectifier in<br>TV Receivers  |
| ★1B3GT      | Half-Wave Rectifier         | 14E          | 3C                       | 1.25F                     | 0.2     | Pulsed Rectifier in TV Receivers   |
| 1B4P        | Sharp-Cutoff Pentode        | 24B          | 4M                       | 2.0F                      | 0.06    | Class A Amplifier  |
| 1B5/<br>25S | Twin Diode—Medium-Mu Triode | 22 or<br>13H | 6M                       | 2.0F                      | 0.06    | Triode Unit as Class A Amplifier   |
| 1B7GT       | Pentagrid Converter         | 14A          | 7Z                       | 1.4F                      | 0.10    | Converter  |

♦ Industrial type

★ See Safety Precautions at end of this section.



# Chart for RCA Receiving Tubes

the Outlines section in the Manual (see Table of Contents on page two. Terminal diagrams are included in numerical-alphabetical order in Terminal Diagram section. (See Table of Contents).

| Plate<br>Volts   | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduct-<br>ance<br>Micromhos  | Amplifi-<br>cation<br>Factor | Power        |                      | RCA<br>Type                           |
|--|--|-------------------------|--------------------------------------|-----------------------------|-------------------------------------|--|------------------------------|--------------|----------------------|---------------------------------------|
|  |  |                         |                                      |                             |                                     |  |                              | Load<br>Ohms | Out-<br>put<br>Watts |                                       |
| For other characteristics, refer to Type OA2   |  |                         |                                      |                             |                                     |  |                              |              |                      | OA2WA <sup>♦</sup>                    |
| 75   | —                                      | —                       | —                                    | 5-40                        | —                                   | —  | —                            | —            | —                    | OA3 <sup>♦</sup><br>OA3A <sup>♦</sup> |
| 130  | —                                      | —                       | —                                    | 25                          | —                                   | —  | —                            | —            | —                    | OA4A <sup>♦</sup>                     |
| For other characteristics, refer to Type OB2   |  |                         |                                      |                             |                                     |  |                              |              |                      | OB2WA <sup>♦</sup>                    |
| 75   | —                                      | —                       | —                                    | 5-30                        | —                                   | —  | —                            | —            | —                    | OC2 <sup>♦</sup>                      |
| For other characteristics, refer to Type OC3   |  |                         |                                      |                             |                                     |  |                              |              |                      | OC3A <sup>♦</sup>                     |
| For other characteristics, refer to Type OD3   |  |                         |                                      |                             |                                     |  |                              |              |                      | OD3A <sup>♦</sup>                     |
| Starting-Supply Voltage per Plate, 300 mln. peak volts<br>DC Output Current, 75 max., 30 min. mA |  |                         |                                      |                             |                                     | Peak Plate Current, 200 max. mA<br>DC Output Voltage, 300 max. volts   |                              |              | OZ4                  |                                       |
| Starting-Supply Voltage per Plate, 300 mln. peak volts<br>DC Output Current, 75 max., 30 min. mA |  |                         |                                      |                             |                                     | Peak Plate Current, 200 max. mA<br>DC Output Voltage, 300 max. volts   |                              |              | OZ4G                 |                                       |
| Max. Peak Plate Inverse Volts, 330<br>Max. Peak Plate mA, 5                                      |  |                         |                                      |                             |                                     | Max. DC Output mA, 0.5<br>Max. Peak Heater-Cathode Volts, 140  |                              |              | 1A3                  |                                       |
| For other characteristics, refer to Type 1D5GP   |  |                         |                                      |                             |                                     |  |                              |              |                      | 1A4P                                  |
| 85   | — 4.5V                                 | 85                      | 0.7                                  | 3.5                         | 300000                              | 800  | —                            | 25000        | 0.100                | 1A5GT                                 |
| 90   | — 4.5V                                 | 90                      | 1.1                                  | 4.0                         | 300000                              | 850  | —                            | 25000        | 0.115                | 1A5GT                                 |
| 135  | — 3V                                   | 67.5                    | 2.5                                  | 1.2                         | 400000                              | Anode-Grid (2): 180 max. volts<br>2.3 mA Oscillator-Grid (1) Resistor.   |                              |              |                      | 1A6                                   |
| 180  | — 3V                                   | 67.5                    | 2.4                                  | 1.3                         | 500000                              | Anode-Grid (2): 90 volts, 1.2 mA<br>Oscillator-Grid (1) Resistor, 0.2 MΩ<br>Conversion Transcond., 250 micromhos |                              |              |                      | 1A7GT                                 |
| 90   | 0V                                     | 45                      | 0.7                                  | 0.6                         | 600000                              | 600  | —                            | 40000        | 0.015                | 1AC5                                  |
| 45   | — 3V                                   | 45                      | 0.2                                  | 1.0                         | 170000                              | 600  | —                            | 40000        | 0.015                | 1AC5                                  |
| 67.5   | — 4.5V                                 | 67.5                    | 0.4                                  | 2.0                         | 150000                              | 750  | —                            | 25000        | 0.050                | 1AC5                                  |
| Max. Peak Inverse Plate Volts, 26000<br>Max. Peak Plate mA, 50                                   |  |                         |                                      |                             |                                     | Max. Average Plate mA, 0.5   |                              |              | 1AD2                 |                                       |
| 30   | 0V                                     | 30                      | 0.16                                 | 0.45                        | 700000                              | 430  | —                            | —            | —                    | 1AD5                                  |
| 67.5   | 0V                                     | 67.5                    | 0.75                                 | 1.85                        | 700000                              | 735  | —                            | —            | —                    | 1AD5                                  |
| Max. Peak Inverse Plate Volts, 25000<br>Max. Peak Plate mA, 45                                   |  |                         |                                      |                             |                                     | Max. Average Plate mA, 0.5   |                              |              | 1AX2                 |                                       |
| Max. Peak Inverse Plate Volts, 26000<br>Max. Peak Plate mA, 50                                   |  |                         |                                      |                             |                                     | Max. Average Plate mA, 0.5   |                              |              | 1AY2                 |                                       |
| Max. Peak Inverse Plate Volts, 26000<br>Max. Peak Plate mA, 50                                   |  |                         |                                      |                             |                                     | Max. Average Plate mA, 0.5   |                              |              | 1B3GT                |                                       |
| For other characteristics, refer to Type 1E5GP   |  |                         |                                      |                             |                                     |  |                              |              |                      | 1B4P                                  |
| For other characteristics, refer to Type 1H6G  |  |                         |                                      |                             |                                     |  |                              |              |                      | 1B5/<br>25S                           |
| For other characteristics, refer to Type 1A7GT   |  |                         |                                      |                             |                                     |  |                              |              |                      | 1B7GT                                 |

| RCA Type         | Name                            | Out-line  | Terminal Dia-gram | Heater or Filament (F) |         | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|------------------|---------------------------------|-----------|-------------------|------------------------|---------|--|
|                  |                                 |           |                   | Volts                  | Amperes |  |
|                  |                                 |           |                   |                        |         |  |
| ★1BC2            | Half-Wave Rectifier             | 7E        | 9RG               | 1.25                   | 0.2     | Pulsed Rectifier in TV Receivers   |
| ★1BH2<br>★1BH2A  | Half-Wave Rectifier             | 7G        | 9RG               | 1.25                   | 0.2     | Flyback Rectifier in TV Receivers  |
| 1C5GT            | Power Pentode                   | 13D       | 6X                | 1.4F                   | 0.10    | Class A Amplifier  |
| 1C6              | Pentagrid Converter             | 24B       | 6L                | 2.0F                   | 0.12    | Converter  |
| 1C7G             | Pentagrid Converter             | 23        | 7Z                | 2.0F                   | 0.12    | Converter  |
| 1C21♦            | Gas-Triode                      | 13J       | 4V                | —                      | —       | Relay Circuits   |
| 1D5GP            | Remote-Cutoff Pentode           | 23        | 5Y                | 2.0F                   | 0.06    | Class A Amplifier  |
| 1D5GT            | Remote-Cutoff Tetrode           | 23        | 5R                | 2.0F                   | 0.06    | Class A Amplifier  |
| 1D7G             | Pentagrid Converter             | 23        | 7Z                | 2.0F                   | 0.06    | Converter  |
| 1D8GT            | Diode-Triode-Power Pentode      | 14A       | 8AJ               | 1.4F                   | 0.10    | Pentode Unit as Class A Amplifier<br>Triode Unit as Class A Amplifier                          |
| ★1DG3            | Half-Wave Rectifier             | 14J       | 8ND               | 1.25F                  | 0.2     | Pulsed Rectifier in TV Receivers   |
| 1DN5             | Diode—Semiremote-Cutoff Pentode | 5C        | 6BW               | 1.4F                   | 0.5     | Pentode Unit as Class A Amplifier  |
| 1E5GP            | Sharp-Cutoff Pentode            | 23        | 5Y                | 2.0F                   | 0.06    | Class A Amplifier  |
| 1E7GT            | Twin Power Pentode              | 13D       | 8C                | 2.0F                   | 0.24    | Class A Amplifier  |
| 1E8              | Pentagrid Converter             | 29A       | 8CN               | 1.25F                  | 0.04    | Converter  |
| 1F4              | Power Pentode                   | 26        | 5K                | 2.0F                   | 0.12    | Class A Amplifier  |
| 1F5G             | Power Amplifier Pentode         | 25        | 6X                | 2.0F                   | 0.12    | Class A Amplifier  |
| 1F7              | Twin Diode—Sharp-Cutoff Pentode | 23        | 6W                | 2.0F                   | 0.06    | Pentode Unit as Class A Amplifier  |
| 1F7G             | Twin Diode—Sharp-Cutoff Pentode | 23        | 7AF               | 2.0F                   | 0.06    | Pentode Unit as Class A Amplifier  |
| ★1G3GT/<br>1B3GT | Half-Wave Rectifier             | 14B       | 3C                | 1.25F                  | 0.2     | Pulsed Rectifier in TV Receivers   |
| 1G4GT            | Medium-Mu Triode                | 13D       | 5S                | 1.4F                   | 0.05    | Class A Amplifier  |
| 1G5G             | Power Pentode                   | 25        | 6X                | 2.0F                   | 0.12    | Class A Amplifier  |
| 1G6GT            | High-Mu Twin Power Triode       | 13D       | 7AB               | 1.4F                   | 0.10    | Class B Amplifier<br>Class A Amplifier   |
| 1H4G             | Medium-Mu Triode                | 22        | 5S                | 2.0F                   | 0.06    | Class B Amplifier  |
| 1H5GT            | Diode—High-Mu Triode            | 14A       | 5Z                | 1.4F                   | 0.05    | Triode Unit as Class A Amplifier   |
| 1H6G             | Twin Diode—Medium-Mu Triode     | 22        | 7AA               | 2.0F                   | 0.06    | Triode Unit as Class A Amplifier   |
| ★1J3             | Half-Wave Rectifier             | 14E       | 3C                | 1.25F                  | 0.2     | Pulsed Rectifier in TV Receivers   |
| 1J5G             | Power Pentode                   | 25        | 6X                | 2.0F                   | 0.12    | Class A Amplifier  |
| 1J6G<br>1J6GT    | Twin-Triode Amplifiers          | 22<br>13F | 7AB               | 2.0F                   | 0.24    | Class B Amplifier  |
| ★1K3             | Half-Wave Rectifier             | 14B       | 3C                | 1.25F                  | 0.2     | Pulsed Rectifier in TV Receivers   |
| ★1K3/<br>1J3     | Half-Wave Rectifier             | 14B       | 3C                | 1.25F                  | 0.2     | Pulsed Rectifier in TV Receivers   |
| 1L4♦             | Pentode                         | 5C        | 6AP               | 1.4F                   | 0.05    | RF Amplifier   |

♦ Industrial type

★ See Safety Precautions at end of this section.

| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA                                   | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduc-<br>tance<br>Micromhos  | Amplifi-<br>cation<br>Factor | Power                      |                      | RCA<br>Type     |
|---|--|-------------------------|--------------------------------------|---|-------------------------------------|--|------------------------------|----------------------------|----------------------|-----------------|
|   |  |                         |                                      |   |                                     |  |                              | Load<br>Ohms               | Out-<br>put<br>Watts |                 |
| Max. Peak Inverse Plate Volts, 18000<br>Max. Peak Plate mA, 45        |  |                         |                                      | 18000   |                                     |  |                              | Max. Average Plate mA, 0.5 |                      | 1BC2            |
| Max. Peak Inverse Plate Volts, 18000<br>Max. Peak Plate mA, 45        |  |                         |                                      | 18000   |                                     |  |                              | Max. Average Plate mA, 0.2 |                      | 1BH2<br>1BH2A   |
| 90  | — 7.5V                                 | 90                      | 3.5                                  | 7.8   | 115000                              | 1550   | —                            | 8000                       | 0.24                 | 1C5GT           |
| For other characteristics, refer to Type 1C7G                         |  |                         |                                      |   |                                     |  |                              |                            |                      |                 |
| 135<br>180  | — 3V<br>— 3V                           | 67.5<br>67.5            | 2.5<br>2.0                           | 1.3<br>1.5  | 600000<br>700000                    | Anode-Grid (2): 180 max. volts,<br>4.0 mA Oscillator-Grid (1) Resistor.<br>Conversion Transcond., 325 micromhos. |                              |                            |                      | 1C7G            |
| 145   | 0                                      | —                       | —                                    | 25  | —                                   | —  |                              | —                          |                      | 1C21*           |
| 90<br>180   | { — 3V<br>min. }                       | 67.5<br>67.5            | 0.9<br>0.8                           | 2.2<br>2.3  | 600000<br>1 M                       | 720<br>750   | —                            | —                          |                      | 1D5GP           |
| For other characteristics, refer to Type 1D5GP                        |  |                         |                                      |   |                                     |  |                              |                            |                      |                 |
| For other characteristics, refer to Type 1A6                          |  |                         |                                      |   |                                     |  |                              |                            |                      |                 |
| 90  | — 9V                                   | 90                      | 1.0                                  | 5.0   | —                                   | 925  | —                            | 12000                      | 0.200                | 1D8GT           |
| 90  | 0V                                     | —                       | —                                    | 1.1   | 43500                               | 575  | 25                           | —                          |                      | 1D8GT           |
| Max. Peak Inverse Plate Volts, 26000<br>Max. Peak Plate mA, 50        |  |                         |                                      | 26000   |                                     |  |                              | Max. Average Plate mA, 0.5 |                      | 1DG3            |
| 67.5  | 0V                                     | 67.5                    | 0.55                                 | 2.1   | 600000                              | 630  | —                            | —                          |                      | 1DN5            |
| 90<br>180   | — 3V<br>— 3V                           | 67.5<br>67.5            | 0.7<br>0.6                           | 1.6<br>1.7  | 1 M<br>1.5 M                        | 600<br>650   | —                            | —                          |                      | 1E5GP           |
| 135   | — 7.5V                                 | 135                     | 3.5                                  | 10.5  | —                                   | —  | —                            | 24000                      | 0.575                | 1E7GT           |
| 45<br>67.5  | 0V<br>0V                               | 45<br>67.5              | 1.1<br>1.5                           | 0.6<br>1.0  | 400000<br>400000                    | Oscillator Grid (1) Resistor, 0.1 MΩ<br>Conversion Transcond., 150 micromhos                                     |                              | —                          |                      | 1E8             |
| For other characteristics, refer to Type 1F5G                         |  |                         |                                      |   |                                     |  |                              |                            |                      |                 |
| 90<br>135   | — 3V<br>— 4.5V                         | 90<br>135               | 1.1<br>2.4                           | 4.0<br>8.0  | 240000<br>—                         | 1400<br>—  | —                            | 20000<br>—                 | 0.11<br>0.31         | 1F5G            |
| For other characteristics, refer to Type 1F7G                         |  |                         |                                      |   |                                     |  |                              |                            |                      |                 |
| 180   | — 1.5V                                 | 67.5                    | 0.7                                  | 2.2   | —                                   | —  | —                            | —                          |                      | 1F7G            |
| Max. Peak Inverse Plate Volts, 26000<br>Max. Peak Plate mA, 50        |  |                         |                                      | 26000   |                                     |  |                              | Max. Average Plate mA, 0.5 |                      | 1G3GT/<br>1B3GT |
| 90  | — 6V                                   | —                       | —                                    | 2.3   | 10700                               | 825  | 8.8                          | —                          |                      | 1G4GT           |
| 90<br>135   | — 6V<br>— 13.5V                        | 90<br>135               | 2.5<br>2.5                           | 8.5<br>9.7  | 133000<br>160000                    | 1500<br>1550   | —                            | 8500<br>9000               | 0.25<br>0.55         | 1G5G            |
| 90  | 0V                                     | —                       | 11                                   | —   | —                                   | —  | —                            | 12000                      | 0.350                | 1G6GT           |
| 180   | — 13.5V                                | —                       | —                                    | 3.1   | 10300                               | 900  | 9.3                          | —                          |                      | 1H4G            |
| 157.5   | — 15V                                  | —                       | —                                    | 1.0□  | —                                   | —  | —                            | 8000                       | 2.1†                 | 1H4G            |
| 90  | 0V                                     | —                       | —                                    | 0.15  | 240000                              | 275  | 65                           | —                          |                      | 1H5GT           |
| 135   | — 3V                                   | —                       | —                                    | 0.8   | 35000                               | 575  | 20                           | —                          |                      | 1H6G            |
| Max. Peak Inverse Plate Volts, 26000 (Abs.)<br>Max. Peak Plate mA, 50 |  |                         |                                      | 26000   |                                     |  |                              | Max. Average Plate mA, 0.5 |                      | 1J3             |
| 135   | — 16.5V                                | 135                     | 2.0                                  | 7.0   | 105000                              | 950  | —                            | 13500                      | 0.45                 | 1J5G            |
| 135<br>135  | 0V<br>— 3V                             | —                       | —                                    | Power Output is for one tube at<br>stated plate-to-plate load |                                     |  | —                            | 10000<br>10000             | 2.1<br>1.9           | 1J6G<br>1J6GT   |
| Max. Peak Inverse Plate Volts, 26000 (Abs.)<br>Max. Peak Plate mA, 50 |  |                         |                                      | 26000   |                                     |  |                              | Max. Average Plate mA, 0.5 |                      | 1K3             |
| Max. Peak Inverse Plate Volts, 26000<br>Max. Peak Plate mA, 50        |  |                         |                                      | 26000   |                                     |  |                              | Max. Average Plate mA, 0.5 |                      | 1K3/<br>1J3     |
| 90  | 0                                      | 90                      | 2                                    | 4.5   | 350000                              | 1025   | —                            | —                          |                      | 1L4*            |

† For two tubes at stated plate-to-plate load.

□ For two tubes.

| RCA<br>Type    | Name                       | Out-<br>line | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |         | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|----------------|----------------------------|--------------|--------------------------|---------------------------|---------|--|
|                |                            |              |                          | Volts                     | Amperes |  |
|                |                            |              |                          |                           |         |  |
| 1L6            | Pentagrid Converter        | 5C           | 7DC                      | 1.4F                      | 0.05    | Converter  |
| 1LA4           | Power Pentode              | 12B          | 5AD                      | 1.4F                      | 0.05    | Amplifier  |
| 1LA6           | Pentagrid Converter        | 12B          | 7AK                      | 1.4F                      | 0.05    | Converter  |
| 1LB4           | Power Pentode              | 12B          | 5AD                      | 1.4F                      | 0.05    | Class A Amplifier  |
| 1LC5           | Sharp-Cutoff Pentode       | 12B          | 7AO                      | 1.4F                      | 0.05    | Class A Amplifier  |
| 1LC6           | Pentagrid Converter        | 12B          | 7AK                      | 1.4F                      | 0.05    | Converter  |
| 1LD5           | Diode—Sharp-Cutoff Pentode | 12B          | 6AX                      | 1.4F                      | 0.05    | Pentode Unit as Class A Amplifier  |
| 1LE3           | Medium-Mu Triode           | 12B          | 4AA                      | 1.4F                      | 0.05    | Class A Amplifier  |
| 1LG5           | Remote-Cutoff Pentode      | 12B          | 7AO                      | 1.4F                      | 0.05    | Class A Amplifier  |
| 1LH4           | Diode—High-Mu Triode       | 12B          | 5AG                      | 1.4F                      | 0.05    | Triode Unit as Class A Amplifier   |
| 1LN5           | Sharp-Cutoff Pentode       | 12B          | 7AO                      | 1.4F                      | 0.05    | Class A Amplifier  |
| ★1N2A          | Half-Wave Rectifier        | 19A          | 3C                       | 1.25F                     | 0.2     | Pulsed Rectifier in TV Receivers   |
| 1N5GT          | Sharp-Cutoff Pentode       | 14A          | 5Y                       | 1.4F                      | 0.05    | Class A Amplifier  |
| 1N6G           | Diode—Power Pentode        | 29A          | 7AM                      | 1.4F                      | 0.05    | Pentode Unit as Class A Amplifier  |
| 1P5GT          | Remote-Cutoff Pentode      | 14A          | 5Y                       | 1.4F                      | 0.05    | Class A Amplifier  |
| 1Q5GT          | Beam Power Tube            | 13D          | 6AF                      | 1.4F                      | 0.1     | Class A Amplifier  |
| 1R5            | Pentagrid Converter        | 5C           | 7AT                      | 1.4F                      | 0.05    | Converter  |
| ★1S2A/<br>DY87 | Half-Wave Rectifier        | 7F           | 9DT                      | 1.4                       | 0.55    | Pulsed Rectifier in TV Receivers   |
| 1S4            | Power Pentode              | 5C           | 7AV                      | 1.4F                      | 0.1     | Class A Amplifier  |
| 1S5            | Diode—Sharp-Cutoff Pentode | 5C           | 6AU                      | 1.4F                      | 0.05    | Pentode Unit as AF Amplifier   |
| 1T4            | Remote-Cutoff Pentode      | 5C           | 6AR                      | 1.4F                      | 0.05    | Class A Amplifier  |
| 1T5GT          | Beam Power Tube            | 13D          | 6X                       | 1.4F                      | 0.05    | Class A Amplifier  |
| 1T6            | Diode—Sharp-Cutoff Pentode | 29A          | 8DA                      | 1.25F                     | 0.04    | Pentode Unit as Class A Amplifier  |
| 1U4            | Sharp-Cutoff Pentode       | 5C           | 6AR                      | 1.4F                      | 0.05    | Class A Amplifier  |
| 1U5            | Diode—Sharp-Cutoff Pentode | 5C           | 6BW                      | 1.4F                      | 0.05    | Pentode Unit as Class A Amplifier  |
| 1V             | Half-Wave Rectifier        | 22 or<br>13H | 4G                       | 6.3                       | 0.3     | With Capacitive-Input Filter   |
| ★1X2A          | Half-Wave Rectifier        | 7A           | 9Y                       | 1.25F                     | 0.2     | Pulsed Rectifier In TV Receivers   |
| 1X2B           |                            |              |                          |                           |         |  |
| ★1X2B/<br>1X2A | Half-Wave Rectifier        | 7A           | 9Y                       | 1.25F                     | 0.2     | Pulsed Rectifier In TV Receivers   |
|                |                            |              |                          |                           |         | Class A Amplifier  |
| 2A3            | Power Triode               | 27B          | 4D                       | 2.5F                      | 2.5     | Push-Pull Class AB <sub>1</sub> Amplifier  |
| 2A5            | Power Pentode              | 28           | 6B                       | 2.5                       | 1.75    | Amplifier  |
| 2A6            | Twin Diode—High-Mu Triode  | 24B          | 6G                       | 2.5                       | 0.8     | Triode Unit as Amplifier   |
| 2A7            | Pentagrid Converter        | 24B          | 7C                       | 2.5                       | 0.8     | Converter  |

★ See Safety Precautions at end of this section.

| Plate  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid | Screen<br>Grid<br>Cur-<br>rent | Plate<br>Cur-<br>rent | AC Plate<br>Resist-<br>ance | Trans-<br>conduc-<br>tance  | Amplifi-<br>cation<br>Factor | Power |             | RCA<br>Type           |
|--|--|----------------|--------------------------------|-----------------------|-----------------------------|---|------------------------------|-------|-------------|-----------------------|
|  |  |                |                                |                       |                             |   |                              | Load  | Out-<br>put |                       |
| Volts  |  | Volts          | mA                             | mA                    | Ohms                        | Micromhos   |                              | Ohms  | Watts       |                       |
| 90   | 0V                                     | 45             | 0.6                            | 0.5                   | 650000                      | Anode-Grid (2): 90 max. volts, 1.2 mA<br>Oscillator-Grid (1) Resistor, 0.2 MΩ<br>Conversion Transcond., 300 micromhos |                              |       |             | 1L6                   |
| For other characteristics, refer to Type 1A5GT   |  |                |                                |                       |                             |   |                              |       |             | 1LA4                  |
| 90   | 0V                                     | 65             | 0.6                            | 0.55                  | 750000                      | Total Cathode mA, 4<br>Conversion Transcond. (for grid-No. 4<br>bias of -3 volts), 10 micromhos                       |                              |       |             | 1L6                   |
| For other characteristics, refer to Pentode Unit of Type 1D8GT   |  |                |                                |                       |                             |   |                              |       |             | 1LB4                  |
| 45   | 0V                                     | 45             | 0.35                           | 1.10                  | 700000                      | 750   |                              |       |             | 1L6                   |
| 90   | 0V                                     | 45             | 0.30                           | 1.15                  | 1 M                         | 775   |                              |       |             | 1L6                   |
| 45   | 0V                                     | 35             | 0.75                           | 0.70                  | 300000                      | Anode-Grid (2): 50 max. volts, 1.4 mA<br>Oscillator-Grid (1) Resistor, 0.2 MΩ<br>Conversion Transcond., 275 micromhos |                              |       |             | 1L6                   |
| 90   | 0V                                     | 35             | 0.70                           | 0.75                  | 650000                      |   |                              |       |             | 1L6                   |
| 90   | 0V                                     | 45             | 0.1                            | 0.6                   | 750000                      | 575   |                              |       |             | 1L5                   |
| 90   | 0V                                     |                |                                | 4.5                   | 11200                       | 1300  | 14.5                         |       |             | 1L3                   |
| 90   | -3V                                    |                |                                | 1.4                   | 19000                       | 760   | 14.5                         |       |             | 1L3                   |
| 90   | 0V                                     | 45             | 0.4                            | 1.7                   | 1 M                         | 800   |                              |       |             | 1L5                   |
| 90   | -1.5V                                  | 90             | 0.9                            | 3.7                   | 500000                      | 1150  |                              |       |             | 1L5                   |
| For other characteristics, refer to Type 1H5GT   |  |                |                                |                       |                             |   |                              |       |             | 1LH4                  |
| 90   | 0V                                     | 90             | 0.35                           | 1.6                   | 1.1 M                       | 800   |                              |       |             | 1LN5                  |
| Max. Peak Inverse Plate Volts (Total DC and Peak), 28000<br>Max. Peak Plate mA, 50   |  |                |                                |                       |                             | Max. Average Plate mA, 0.5  |                              |       |             | 1N2A                  |
|  | 0V                                     | 90             | 0.3                            | 1.2                   | 1.5 M                       | 750   |                              |       | 90          | 1N5GT                 |
| 90   | -4.5V                                  | 90             | 0.6                            | 3.1                   | 300000                      | 800   |                              | 25000 | 0.1         | 1N6G                  |
| 90   | 0V                                     | 90             | 0.7                            | 2.3                   | 800000                      | 750   |                              |       |             | 1P5GT                 |
| 110  | -6.6V                                  | 110            | 1.4                            | 10                    | 100000                      | 2200  |                              | 8000  | 0.4         | 1Q5GT                 |
| 45   | 0V                                     | 45             | 2.1                            | 0.7                   | 400000                      | Conversion Transcond., 210 μmhos  |                              |       |             | 1R5                   |
| 90   | 0V                                     | 67.5           | 3.5                            | 1.5                   | 500000                      | Conversion Transcond., 280 μmhos  |                              |       |             | 1R5                   |
| Max. Peak Inverse Plate Volts, 22000<br>Max. Peak Plate mA, 40   |  |                |                                |                       |                             | Max. Average Plate mA, 0.8  |                              |       |             | 1S2A/<br>DY87         |
| 45   | -4.5V                                  | 45             | 0.8                            | 3.8                   | 100000                      | 700   |                              | 8000  | 0.065       | 1S4                   |
| 90   | -7V                                    | 67.5           | 1.4                            | 7.4                   | 100000                      | 1575  |                              | 8000  | 0.27        | 1S4                   |
| Plate Supply, 90 V applied through 1 MΩ resistor. Screen Supply, 90 V applied through 3.1 MΩ resistor. Grid Bias, 0 volts. Grid Resistor, 10 megohms. Voltage Gain, 66 approx. |  |                |                                |                       |                             |   |                              |       |             | 1S5                   |
| 45   | 0V                                     | 45             | 0.7                            | 1.7                   | 350000                      | 700   |                              |       |             | 1T4                   |
| 90   | 0V                                     | 67.5           | 1.4                            | 3.5                   | 500000                      | 900   |                              |       |             | 1T4                   |
| 90   | -6V                                    | 90             | 0.8                            | 6.5                   | 250000                      | 1150  |                              | 14000 | 0.17        | 1T5GT                 |
| 45   | 0V                                     | 45             | 0.21                           | 0.75                  | 500000                      | 475   |                              |       |             | 1T6                   |
| 67.5   | 0V                                     | 67.5           | 0.4                            | 1.6                   | 400000                      | 600   |                              |       |             | 1T6                   |
| 90   | 0V                                     | 90             | 0.50                           | 1.1                   | 1 M                         | 900   |                              |       |             | 1U4                   |
| 67.5   | 0V                                     | 67.5           | 0.4                            | 1.6                   | 600000                      | 625   |                              |       |             | 1U5                   |
| Max. AC Plate Volts (RMS), 325<br>Max. DC Output mA, 45  |  |                |                                |                       |                             | Min. Total Effective Plate-Supply Impedance: Up to 117<br>volts, 0 ohms; at 150 volts, 30 ohms; at 325 volts, 75 ohms |                              |       |             | 1V                    |
| Max. Peak Inverse Plate Volts, 20000<br>Max. Peak Plate mA, 45   |  |                |                                |                       |                             | Max. Average Plate mA, 0.5  |                              |       |             | 1X2A                  |
| Max. Peak Inverse Plate Volts, 22000<br>Max. Peak Plate mA, 45   |  |                |                                |                       |                             | Max. Average Plate mA, 0.5  |                              |       |             | 1X2B<br>1X2B/<br>1X2A |
| 250  | -45V                                   |                |                                | 60.0                  | 800                         | 5250  | 4.2                          | 2500  | 3.5         | 2A3                   |
| 300  | 780Ω□                                  |                |                                | 80.0□                 |                             |   |                              | 5000  | 10.0†       | 2A3                   |
| 300  | -62V                                   |                |                                | 80.0□                 |                             |   |                              | 3000  | 15.0†       | 2A3                   |
| For other characteristics, refer to Type 6F6G  |  |                |                                |                       |                             |   |                              |       |             | 2A5                   |
| For other characteristics, refer to Type 6SQ7  |  |                |                                |                       |                             |   |                              |       |             | 2A6                   |
| For other characteristics, refer to Type 6A8   |  |                |                                |                       |                             |   |                              |       |             | 2A7                   |

† For two tubes at stated plate-to-plate load.

□ For two tubes.

| RCA Type             | Name                             | Out-line  | Terminal Diagram | Heater or Filament (F) |               | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|----------------------|----------------------------------|-----------|------------------|------------------------|---------------|--|
|                      |                                  |           |                  | Volts                  | Amperes       |  |
|                      |                                  |           |                  |                        |               |  |
| 2AF4A<br>2AF4B       | Medium-Mu Triode                 | 5B        | 7DK              | 2.35                   | 0.6           | Class A Amplifier  |
| ★2AH2                | Half-Wave Rectifier              | 9A        | 12DG             | 2.5                    | 0.3           | Pulsed Rectifier in TV Receivers   |
| ★2AS2                | Half-Wave Rectifier              | 9B        | 12EW             | 2.5                    | 0.33          | Pulsed Rectifier in TV Receivers   |
| 2B7                  | Twin Diode—Remote-Cutoff Pentode | 24B       | 7D               | 2.5                    | 0.8           | Pentode Unit as Amplifier  |
| 2BA2                 | Half-Wave Rectifier              | 6B        | 9U               | 1.8F                   | 0.3           | Flyback Rectifier in TV Receivers  |
| ★2BJ2                | Half-Wave Rectifier              | 7A        | 9RT              | 2.3                    | 0.3           | Pulsed Rectifier in TV Receivers   |
| ★2BJ2A               | Half-Wave Rectifier              | 7A        | 9RT              | 2.3                    | 0.3           | Pulsed Rectifier in TV Receivers   |
| 2BN4                 | Medium-Mu Triode                 | 5C        | 7EG              | 2.3                    | 0.6           | Class A Amplifier  |
| 2D21W♦               | Gas-Tetrode                      | 5C        | 7BN              | 6.3                    | 0.6           | Thyratron  |
| 2CN3A                | Half-Wave Rectifier              | 14F       | 8MU              | 1.8                    | 0.9           | Flyback Rectifier in TV Receivers  |
| 2DZ4                 | Medium-Mu Triode                 | 5B        | 7DK              | 2.35                   | 0.6           | Class A Amplifier  |
| 2E5                  | Electron-Ray Tube                | 22 or 13H | 6R               | 2.5                    | 0.8           | Visual Indicator   |
| 2EN5                 | Twin Diode                       | 5C        | 7FL              | 2.1                    | 0.45          | Horizontal Phase Detector  |
| 2ER5                 | High-Mu Triode                   | 5C        | 7FP              | 2.3                    | 0.6           | Class A Amplifier  |
| 2FQ5A                | High-Mu Triode                   | 5C        | 7FP              | 2.3                    | 0.6           | Class A Amplifier  |
| 2GK5                 | High-Mu Triode                   | 5C        | 7FP              | 2.3                    | 0.6           | Class A Amplifier  |
| 2GU5                 | Beam Hexode                      | 5C        | 7GA              | 2.4                    | 0.6           | Class A Amplifier  |
| ★3A2                 | Half-Wave Rectifier              | 7A        | 9DT              | 3.15                   | 0.22          | Pulsed Rectifier in TV Receivers   |
| ★3A3<br>3A3/3B2      | Half-Wave Rectifier              | 14E       | 8EZ              | 3.15                   | 0.22          | Pulsed Rectifier in TV Receivers   |
| 3A3A<br>3A3A/<br>3B2 | Half-Wave Rectifier              | 14F       | 8EZ              | 3.15                   | 0.22          | Pulsed Rectifier in TV Receivers   |
| ★3A3B                | Half-Wave Rectifier              | 14F       | 8EZ              | 3.15                   | 0.22          | Pulsed Rectifier in TV Receivers   |
| 3A4♦                 | Tetrode                          | 5C        | 7BB              | 1.4F<br>2.8F           | 0.2<br>0.1    | AF Power Amplifier   |
| 3A8GT                | Diode-Triode—Pentode             | 29G       | 8AS              | 1.4F<br>2.8F           | 0.1<br>0.05   | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 3AF4A                | Medium-Mu Triode                 | 5B        | 7DK              | 3.15                   | 0.45          | Class A Amplifier  |
| ★3AT2                | Half-Wave Rectifier              | 9B        | 12FV             | 3.15                   | 0.22          | Pulsed Rectifier in TV Receivers   |
| 3AV6                 | Twin Diode—High-Mu Triode        | 5C        | 7BT              | 3.15                   | 0.6           | Triode Unit as Class A Amplifier   |
| 3AW2                 | Half-Wave Rectifier              | 9B        | 12EW             | 3.15                   | 0.39          | Pulsed Rectifier in TV Receivers   |
| 3AW3                 | Half-Wave Rectifier              | 14B       | 8EZ              | 3.15                   | 0.22          | Pulsed Rectifier in TV Receivers   |
| 3B2                  | Half-Wave Rectifier              | 21C       | 8GH              | 3.15                   | 0.22          | Pulsed Rectifier in TV Service   |
| 3B4WA♦               | Beam Power Tube                  | 5C        | 7CY              | 1.25F<br>2.50F         | 0.33<br>0.165 | Class C Amplifier  |
| 3BA6                 | Remote-Cutoff Pentode            | 5C        | 7BK              | 3.15                   | 0.6           | Class A Amplifier  |
| 3BC5                 | Sharp-Cutoff Pentode             | 5C        | 7BD              | 3.15                   | 0.6           | Class A Amplifier  |
| 3BE6                 | Pentagrid Converter              | 5C        | 7CH              | 3.15                   | 0.6           | Converter  |

♦ Industrial type

★ See Safety Precautions at end of this section.

| Plate<br>Volts | Grid Bias<br>or<br>Cathode<br>Resistor   | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>cond-<br>uctance<br>Micromhos                             | Amplifi-<br>cation<br>Factor | Power  |                      | RCA<br>Type          |
|----------------|--|-------------------------|--------------------------------------|-----------------------------|-------------------------------------|---|------------------------------|--|----------------------|----------------------|
|                |  |                         |                                      |                             |                                     |   |                              | Load<br>Ohms   | Out-<br>put<br>Watts |                      |
| 80             | 150Ω   | —                       | —                                    | 17.5                        | 2100                                | 6500  | 13.5                         | —  | —                    | 2AF4A<br>2AF4B       |
|                | Max. Peak Inverse Plate Volts, 30000<br>Max. Peak Plate mA, 80                   |                         |                                      |                             |                                     |   |                              | Max. Average Plate mA, 1.5                                       |                      | 2AH2                 |
|                | Max. Peak Inverse Plate Volts, 30000<br>Max. Peak Plate mA, 80                   |                         |                                      |                             |                                     |   |                              | Max. Average Plate mA, 1.5                                       |                      | 2AS2                 |
|                | For other characteristics, refer to Type 6B8G                                    |                         |                                      |                             |                                     |   |                              |  |                      | 2B7                  |
|                | Max. Peak Inverse Plate Volts, 8250<br>Max. Peak Plate mA, 50                    |                         |                                      |                             |                                     |   |                              | Max. Average Plate mA, 0.6                                       |                      | 2BA2                 |
|                | Max. Peak Inverse Plate Volts, 20000<br>Max. Peak Plate mA, 80                   |                         |                                      |                             |                                     |   |                              | Max. Average Plate mA, 1   |                      | 2BJ2                 |
|                | Max. Peak Inverse Plate Volts, 22000<br>Max. Peak Plate mA, 80                   |                         |                                      |                             |                                     |   |                              | Max. Average Plate mA, 1   |                      | 2BJ2A                |
| 150            | 220Ω   | —                       | —                                    | 9                           | 6300                                | 6800  | 43                           | —  | —                    | 2BN4                 |
|                | For other characteristics, refer to Type 2D21                                    |                         |                                      |                             |                                     |   |                              |  |                      | 2D21W♦               |
|                | For other characteristics, refer to Type 3CN3A                                   |                         |                                      |                             |                                     |   |                              |  |                      | 2CN3A                |
| 80             | —  | —                       | —                                    | 15                          | 2000                                | 6700  | 14                           | —  | —                    | 2DZ4                 |
|                | For other characteristics, refer to Type 6E5                                     |                         |                                      |                             |                                     |   |                              |  |                      | 2E5                  |
|                | Max. Peak Heater-Cathode Volts, ±200<br>DC Volts Not to Exceed +100              |                         |                                      |                             |                                     |   |                              | Max. DC Plate mA, 5  |                      | 2EN5                 |
|                | For other characteristics, refer to Type 6ER5                                    |                         |                                      |                             |                                     |   |                              |  |                      | 2ER5                 |
|                | For other characteristics, refer to type 6FQ5A                                   |                         |                                      |                             |                                     |   |                              |  |                      | 2FQ5A                |
|                | For other characteristics, refer to Type 6GK5/6FQ5A                              |                         |                                      |                             |                                     |   |                              |  |                      | 2GK5                 |
|                | For other characteristics, refer to Type 6GU5                                    |                         |                                      |                             |                                     |   |                              |  |                      | 2GU5                 |
|                | Max. Peak Inverse Plate Volts, 18000<br>Max. Peak Plate mA, 80                   |                         |                                      |                             |                                     |   |                              | Max. Average Plate mA, 1.5                                       |                      | 3A2                  |
|                | Max. Peak Inverse Plate Volts, 30000<br>Max. Peak Plate mA, 88                   |                         |                                      |                             |                                     |   |                              | Max. Average Plate mA, 1.7                                       |                      | 3A3<br>3A3/3B2       |
|                | Max. Peak Inverse Plate Volts, 30000<br>Max. Peak Plate mA, 100                  |                         |                                      |                             |                                     |   |                              | Max. Average Plate mA, 2   |                      | 3A3A<br>3A3A/<br>3B2 |
|                | Max. Peak Inverse Plate Volts, 38000<br>Max. Peak Plate mA, 100                  |                         |                                      |                             |                                     |   |                              | Max. Average Plate mA, 2   |                      | 3A3B                 |
| 150            | -8.4V  | 90                      | 2.2                                  | 133                         | 100000                              | 1900  | —                            | 8000   | 0.7                  | 3A4♦                 |
| 90             | 0V   | —                       | —                                    | 0.2                         | 200000                              | 325   | 65                           | —  | —                    | —                    |
| 90             | 0V   | 90                      | 0.5                                  | 1.5                         | 800000                              | 750   | —                            | —  | —                    | 3A8GT                |
|                | For other characteristics, refer to Type 2AF4B                                   |                         |                                      |                             |                                     |   |                              |  |                      | 3AF4A                |
|                | Max. Peak Inverse Plate Volts, 30000<br>Max. Peak Plate mA, 88                   |                         |                                      |                             |                                     |   |                              | Max. Average Plate mA, 1.7                                       |                      | 3AT2                 |
|                | For other characteristics, refer to Type 6AV6                                    |                         |                                      |                             |                                     |   |                              |  |                      | 3AV6                 |
|                | For other characteristics, refer to Type 3CZ3                                    |                         |                                      |                             |                                     |   |                              |  |                      | 3AW2                 |
|                | For other characteristics, refer to Type 3A3/3B2                                 |                         |                                      |                             |                                     |   |                              |  |                      | 3AW3                 |
|                | Max. Peak Plate mA, 80<br>Max. Total DC & Peak Inverse Plate Volts, 35000 (Abs.) |                         |                                      |                             |                                     |   |                              | Max. DC Inverse Plate Volts, 25000<br>Max. Average Plate mA, 1.1 |                      | 3B2                  |
| 150            | -38V   | 135                     | 6.2                                  | 25                          | —                                   | —   | —                            | —  | 1.25                 | 3B4WA♦               |
| 100            | 68Ω  | 100                     | 4.4                                  | 10.8                        | 250000                              | 4300  | —                            | —  | —                    | —                    |
| 250            | 68Ω  | 100                     | 4.2                                  | 11                          | 1 M                                 | 4400  | —                            | —  | —                    | 3BA6                 |
| 100            | 180Ω   | 100                     | 1.4                                  | 4.7                         | 600000                              | 4900  | —                            | —  | —                    | —                    |
| 250            | 180Ω   | 150                     | 2.1                                  | 7.5                         | 800000                              | 5700  | —                            | —  | —                    | 3BC5                 |
| 250            | Self-<br>Excited   | 100                     | 6.8                                  | 2.9                         | 1 M                                 | Conversion Transcond., 475 μmhos<br>Grid-No. 1 Resistor, 20000 ohms |                              |  |                      | 3BE6                 |

| RCA Type              | Name                                      | Out-line | Terminal Diagram | Heater or Filament (F) |             | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|-----------------------|---|----------|------------------|------------------------|-------------|--|
|                       |   |          |                  | Volts                  | Amperes     |  |
| ★3BL2<br>★3BL2A       | Half-Wave Rectifier                       | 9B       | 12HK             | 3.3F                   | 0.285       | Pulsed Rectifier in TV Receivers   |
| ★3BM2                 | Half-Wave Rectifier                       | 9B       | 12HK             | 3F                     | 0.3         | Pulsed Rectifier in TV Receivers   |
| ★3BN2<br>★3BN2A       | Half-Wave Rectifier                       | 9B       | 12FV             | 3.15                   | 0.3         | Flyback Rectifiers in TV Receivers   |
| 3BN4                  | Medium-Mu Triode                          | 5C       | 7EG              | 3.0                    | 0.45        | Class A Amplifier  |
| 3BS2A                 | Half-Wave Rectifier                       | 9B       | 12HY             | 3.15                   | 0.48        | Flyback Rectifiers in TV Receivers   |
| 3BU8                  | Sharp-Cutoff Twin Pentode                 | 6E       | 9FG              | 3.15                   | 0.6         | Class A Amplifier<br>(With both sections operating)  |
| 3BY6                  | Pentagrid Amplifier                       | 5C       | 7GH              | 3.15                   | 0.6         | Class A Amplifier  |
| ★3CA3                 | Half-Wave Rectifier                       | 14E      | 8MH              | 3.6                    | 0.225       | Pulsed Rectifier in TV Receivers   |
| 3CE5                  | Sharp-Cutoff Pentode                      | 5C       | 7BD              | 3.15                   | 0.6         | Class A Amplifier  |
| 3CF6                  | Sharp-Cutoff Pentode                      | 5C       | 7CM              | 3.15                   | 0.6         | Class A Amplifier  |
| ★3CN3A                | Half-Wave Rectifier                       | 14F      | 8MU              | 3.15                   | 0.48        | Flyback Rectifiers in TV Receivers   |
| ★3CX3                 | Half-Wave Rectifier                       | 13G      | 8MT              | 3.15                   | 0.48        | Pulsed Rectifier in TV Receivers   |
| ★3CZ3                 | Half-Wave Rectifier                       | 34A      | 8EZ              | 3.15                   | 0.48        | Pulsed Rectifiers in TV Receivers  |
| 3DT6                  | Sharp-Cutoff Pentode                      | 5C       | 7EN              | 3.15                   | 0.6         | Class A Amplifier  |
| 3DZ4                  | Medium-Mu Triode                          | 5B       | 7DK              | 3.2                    | 0.45        | Class A Amplifier  |
| 3EA5                  | Sharp-Cutoff Tetrode                      | 5C       | 7EW              | 2.9                    | 0.45        | Class A Amplifier  |
| 3EH7                  | Semiremote-Cutoff Pentode                 | 6C       | 9AQ              | 3.4                    | 0.6         | Class A Amplifier  |
| 3EJ7                  | Sharp-Cutoff Pentode                      | 6C       | 9AQ              | 3.4                    | 0.6         | Class A Amplifier  |
| 3FH5                  | High-Mu Triode                            | 5C       | 7FP              | 3.0                    | 0.45        | Class A Amplifier  |
| 3GS8<br>3GS8/<br>3BU8 | Sharp-Cutoff Twin Pentode                 | 6E       | 9LW              | 3.15                   | 0.6         | Class A Amplifier<br>(With both sections operating)  |
| 3HA5                  | High-Mu Triode                            | 5A       | 7GM              | 2.7                    | 0.45        | Class A Amplifier  |
| 3HS8                  | Sharp-Cutoff Twin Pentode                 | 6E       | 9FG              | 3.15                   | 0.6         | Class A Amplifier<br>(With both sections operating)  |
| 3JC6                  | Sharp-Cutoff Pentode                      | 6B       | 9PM              | 3.5                    | 0.6         | Class A Amplifier  |
| 3JD6                  | Sharp-Cutoff Pentode                      | 6B       | 9PM              | 3.5                    | 0.6         | Class A Amplifier  |
| 3LF4                  | Beam Power Tube                           | 12B      | 6BA              | 1.4F<br>2.8F           | 0.1<br>0.05 | Class A Amplifier  |
| 3Q4                   | Power Pentode                             | 5C       | 7BA              | 1.4F<br>2.8F           | 0.1<br>0.05 | Class A Amplifier  |
| 3Q5GT                 | Beam Power Tube                           | 13D      | 7AP              | 1.4F<br>2.8F           | 0.1<br>0.05 | Class A Amplifier  |
| 3S4                   | Power Pentode                             | 5C       | 7BA              | 1.4F<br>2.8F           | 0.1<br>0.05 | Class A Amplifier  |
| 3V4                   | Power Pentode                             | 5C       | 6BX              | 1.4F<br>2.8F           | 0.1<br>0.05 | Class A Amplifier  |
| 4BC5                  | Sharp-Cutoff Pentode                      | 5C       | 7BD              | 4.2                    | 0.45        | Class A Amplifier  |
| 4BL8                  | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B       | 9DC              | 4.6                    | 0.6         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 4BQ7A/<br>4BZ7        | Medium Mu Twin Triode                     | 6B       | 9AJ              | 4.2                    | 0.6         | Each Unit as Class A Amplifier   |
| 4BS8                  | Medium-Mu Twin-Triode                     | 6B       | 9AJ              | 4.6                    | 0.6         | Class A Amplifier  |
| 4BU8                  | Sharp-Cutoff Twin Pentode                 | 6E       | 9FG              | 4.2                    | 0.45        | Class A Amplifier<br>(With both sections operating)  |

★ See Safety Precautions at end of this section.





| RCA<br>Type     | Name                                      | Out-<br>line | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |         | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|-----------------|---|--------------|--------------------------|---------------------------|---------|--|
|                 |   |              |                          | Volts                     | Amperes |  |
|                 |   |              |                          |                           |         |  |
| 4BZ7            | Medium-Mu Twin Triode                     | 6B           | 9AJ                      | 4.2                       | 0.6     | Each Unit<br>as Class A Amplifier  |
| 4CY5            | Sharp-Cutoff Tetrode                      | 5C           | 7EW                      | 4.5                       | 0.3     | Class A Amplifier  |
| 4DT6            | Sharp-Cutoff Pentode                      | 5C           | 7EN                      | 4.2                       | 0.45    | Class A Amplifier  |
| 4EH7            | Semiremote-Cutoff Pentode                 | 6C           | 9AQ                      | 4.4                       | 0.45    | Class A Amplifier  |
| 4EJ7            | Sharp-Cutoff Pentode                      | 6C           | 9AQ                      | 4.4                       | 0.45    | Class A Amplifier  |
| 4ES8            | Variable-Mu Twin-Triode                   | 6B           | 9AJ                      | 4                         | 0.6     | Each Unit as Class A Amplifier<br>Cascode-Type Amplifier   |
| 4ES8/<br>XCC189 | Variable-Mu Twin Triode                   | 6B           | 9AJ                      | 4                         | 0.6     | Each Unit<br>as Class A Amplifier  |
| 4EW6            | Sharp-Cutoff Pentode                      | 5C           | 7CM                      | 4.2                       | 0.6     | Class A Amplifier  |
| 4GM6            | Semiremote-Cutoff Pentode                 | 5C           | 7CM                      | 4.2                       | 0.6     | Class A Amplifier  |
| 4GS8            | Sharp-Cutoff Pentode                      | 6E           | 9LW                      | 4.2                       | 0.45    | Class A Amplifier  |
| 4GS8/<br>4BU8   | Sharp-Cutoff Twin Pentode                 | 6E           | 9LW                      | 4.2                       | 0.45    | Class A Amplifier<br>(With both sections operating)  |
| 4GX7            | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B           | 9QA                      | 4.2                       | 0.6     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                                 |
| 4GZ5            | Power Pentode                             | 5C           | 7CV                      | 4                         | 0.6     | Class A Amplifier  |
| 4HA5            | High-Mu Triode                            | 5A           | 7GM                      | 3.9                       | 0.3     | Class A Amplifier  |
| 4HA7            | Dual Triode                               | 8A           | 12FQ                     | 4.2                       | 0.6     | Each Unit<br>as Class A Amplifier  |
| 4HA7/<br>4HC7   | Dual Triode                               | 8A           | 12FQ                     | 4.2                       | 0.6     | Class A Amplifier  |
| 4HC7            | Dual Triode                               | 30E          | 12FR                     | 4.2                       | 0.6     | Each Unit<br>as Class A Amplifier  |
| 4HM6            | Sharp-Cutoff Pentode                      | 6B           | 9PM                      | 4.2                       | 0.45    | Class A Amplifier  |
| 4HT6            | Semiremote-Cutoff Pentode                 | 6B           | 9PM                      | 4.2                       | 0.45    | Class A Amplifier  |
| 4JC6            | Sharp-Cutoff Pentode                      | 6B           | 9PM                      | 4.5                       | 0.45    | Class A Amplifier  |
| 4KN8/<br>4RHH8  | Medium-Mu Twin-Triode                     | 6B           | 9AJ                      | 4.2                       | 0.6     | Class A Amplifier  |
| 4LU6            | Sharp-Cutoff Pentode                      | 5C           | 7CM                      | 4.2                       | 0.6     | Class A Amplifier  |
| 5AS4            | Full-Wave Rectifier                       | 27A          | 5T                       | 5.0F                      | 3.0     | With Capacitive-Input Filter   |
| 5AS8            | Diode—Sharp-Cutoff Pentode                | 6B           | 9DS                      | 4.7                       | 0.6     | Class A Amplifier  |
| 5AU4            | Full-Wave Rectifier                       | 19G          | 5T                       | 5.0F                      | 3.75    | With Capacitive-Input Filter<br>With Inductive-Input Filter  |
| 5AV8            | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B           | 9DZ                      | 4.7                       | 0.6     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                                    |
| 5AW4            | Full-Wave Rectifier                       | 19H          | 5T                       | 5.0F                      | 3.7     | Rectifier  |
| 5AZ4            | Full-Wave Rectifier                       | 12C          | 5T                       | 5.0F                      | 2.0     |  |
| 5B8             | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B           | 9EC                      | 4.7                       | 0.6     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                                    |
| 5BC3            | Full-Wave Rectifier                       | 17C          | 9QJ                      | 5F                        | 3       | With Capacitive-Input Filter<br>With Inductive-Input Filter  |
| 5BE8            | Medium-Mu Triode—Sharp-Cutoff<br>Pentode  | 6B           | 9EG                      | 4.7                       | 0.6     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                                 |

| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA        | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduc-<br>tance<br>Micromhos | Amplifi-<br>cation<br>Factor | Power        |                      | RCA<br>Type     |      |
|---|--|-------------------------|--------------------------------------|------------------------------------|-------------------------------------|---|------------------------------|--------------|----------------------|-----------------|------|
|   |  |                         |                                      |                                    |                                     |   |                              | Load<br>Ohms | Out-<br>put<br>Watts |                 |      |
| For other characteristics, refer to Type 6BZ7                                 |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4BZ7            |      |
| 125   | — 1V                                   | 80                      | 1.5                                  | 10                                 | 100000                              | 8000                                    | —                            | —            | —                    | 4CY5            |      |
| 150   | 56Ω                                    | 100                     | 2.1                                  | 1.1                                | 150000                              | 515                                     | —                            | —            | —                    | 4DT6            |      |
| 200   | — 2                                    | 90                      | 4.5                                  | 12                                 | 0.5                                 | 12500                                   | —                            | —            | —                    | 4EH7            |      |
| 200   | — 2.5                                  | 200                     | 4.1                                  | 10                                 | 0.35                                | 15000                                   | —                            | —            | —                    | 4EJ7            |      |
| For other characteristics, refer to Type 6ES8                                 |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4ES8            |      |
| For other characteristics, refer to Type 6ES8/ECC189                          |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4ES8/<br>XCC189 |      |
| For other characteristics, refer to Type 6EW6                                 |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4EW6            |      |
| For other characteristics, refer to Type 6GM6                                 |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4GM6            |      |
| For other characteristics, refer to Type 4GS8/4BU8                            |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4GS8            |      |
| 100   | —                                      | 67.5                    | 6.0                                  | —                                  | Grid-No. 3 volts, each section, —10 |   |                              |              |                      | 4GS8/           |      |
| 100   | —                                      | 67.5                    | 6.0                                  | 2.0                                | Grid-No. 3 volts, each section, 0   |   |                              |              |                      | 4BU8            |      |
| : Grid current adjusted for 100 microamperes DC                               |  |                         |                                      |                                    |                                     |   |                              |              |                      |                 |      |
| For other characteristics, refer to Type 5GX7                                 |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4GX7            |      |
| For other characteristics, refer to Type 6GZ5                                 |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4GZ5            |      |
| 135   | — 1V                                   | —                       | —                                    | 11.5                               | —                                   | 14500                                   | 72                           | —            | —                    | 4HA5            |      |
| 135   | 0Ω                                     | —                       | —                                    | 19                                 | —                                   | 20000                                   | 80                           | —            | —                    |                 |      |
| 250   | — 8.5                                  | —                       | —                                    | 10.5                               | 7700                                | 2200                                    | 17                           | —            | —                    | 4HA7            |      |
| 250   | — 2                                    | —                       | —                                    | 1.2                                | 62500                               | 1600                                    | 100                          | —            | —                    |                 |      |
| For other characteristics, refer to Type 5HA7                                 |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4HA7/<br>4HC7   |      |
| 150   | — 1                                    | —                       | —                                    | 18                                 | 5200                                | 4400                                    | 23                           | —            | —                    | 4HC7            |      |
| 150   | — 1                                    | —                       | —                                    | 1                                  | 53000                               | 1900                                    | 100                          | —            | —                    |                 |      |
| For other characteristics, refer to Type 6HM6                                 |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4HM6            |      |
| 125   | 56Ω                                    | 125                     | 4                                    | 15                                 | 143000                              | 14000                                   | —                            | —            | —                    | 4HT6            |      |
| For other characteristics, refer to Type 6JC6                                 |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4JC6            |      |
| For other characteristics, refer to Type 6KN8/6RHH8                           |  |                         |                                      |                                    |                                     |   |                              |              |                      | 4KN8/<br>4RHH8  |      |
| 250   | 820Ω                                   | 250                     | 2.3                                  | 9                                  | 280000                              | 3900                                    | —                            | —            | —                    | 4LUG            |      |
| 50  | 65Ω                                    | 250                     | 15                                   | 40                                 | —                                   | —                                       | —                            | —            | —                    |                 |      |
| Max. AC Volts per Plate (RMS), 550  |  |                         |                                      | Max. DC Output mA, 300             |                                     |   | Min. Total Effect. Supply    |              |                      |                 | 5AS4 |
| Max. Peak Inverse Volts, 1550   |  |                         |                                      | Max. Peak Plate mA, 1000           |                                     |   | Imped. per Plate, 97 ohms    |              |                      |                 |      |
| For other characteristics, refer to Type 6AS8                                 |  |                         |                                      |                                    |                                     |   |                              |              |                      | 5AS8            |      |
| Max. DC Output mA, 325 for AC Volts per Plate, 400                            |  |                         |                                      |                                    |                                     | Max. Peak Inverse Volts, 1400           |                              |              |                      | 5AU4            |      |
| and Total Effect. Supply Imped. per Plate, 50 ohms                            |  |                         |                                      |                                    |                                     | Max. Peak Plate mA per Plate, 1075      |                              |              |                      |                 |      |
| Max. DC Output mA, 325 for AC Volts per Plate, 500 and Input Choke 10 henries |  |                         |                                      |                                    |                                     | Max. Peak Plate mA per Plate, 1075      |                              |              |                      |                 |      |
| 200   | — 6V                                   | —                       | —                                    | 13                                 | 5750                                | 3300                                    | 19                           | —            | —                    | 5AV8            |      |
| 200   | 180Ω                                   | 150                     | 2.8                                  | 9.5                                | 300000                              | 6200                                    | —                            | —            | —                    |                 |      |
| Max. Peak Inverse Volts, 1550   |  |                         |                                      | Max. Peak Plate mA per Plate, 750  |                                     |   |                              |              |                      | 5AW4            |      |
| For ratings and characteristics, refer to Type 5Y3GT                          |  |                         |                                      |                                    |                                     |   |                              |              |                      | 5AZ4            |      |
| 200   | — 6V                                   | —                       | —                                    | 13                                 | 5750                                | 3300                                    | 19                           | —            | —                    | 5B8             |      |
| 200   | 180Ω                                   | 150                     | 2.8                                  | 9.5                                | 300000                              | 6200                                    | —                            | —            | —                    |                 |      |
| Max. AC Volts per Plate (RMS), 500  |  |                         |                                      | Max. DC Output mA, 150             |                                     |   |                              |              |                      | 5BC3            |      |
| Max. Peak Inverse Volts, 1700   |  |                         |                                      | Max. Peak Plate mA per Plate, 1000 |                                     |   |                              |              |                      |                 |      |
| Min. Total Effect. Supply Imped. per Plate, 21 ohms                           |  |                         |                                      |                                    |                                     |   |                              |              |                      |                 |      |
| Max. AC Volts per Plate (RMS), 600  |  |                         |                                      |                                    |                                     | Max. DC Output mA, 150                  |                              |              |                      | 5BC3            |      |
| Max. Peak Inverse Volts, 1700   |  |                         |                                      |                                    |                                     | Max. Peak Plate mA per Plate, 1000      |                              |              |                      |                 |      |
| Min. Value of Input Choke, 10 henries   |  |                         |                                      |                                    |                                     |   |                              |              |                      |                 |      |
| 150   | 56Ω                                    | —                       | —                                    | 18                                 | 5000                                | 8500                                    | 40                           | —            | —                    | 5BE8            |      |
| 250   | 68Ω                                    | 110                     | 3.5                                  | 10                                 | 400000                              | 5200                                    | —                            | —            | —                    |                 |      |

| RCA Type                | Name                                  | Out-line | Terminal Diagram | Heater or Filament (F) |         | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|-------------------------|---------------------------------------|----------|------------------|------------------------|---------|--|
|                         |                                       |          |                  | Volts                  | Amperes |  |
|                         |                                       |          |                  |                        |         |  |
| 5BT8                    | Twin-Diode—Sharp-Cutoff Pentode       | 6B       | 9FE              | 4.7                    | 0.6     | Class A Amplifier  |
| 5BW8                    | Twin-Diode—Sharp-Cutoff Pentode       | 6B       | 9HK              | 4.7                    | 0.6     | Pentode Unit as Class A Amplifier  |
| 5CL8                    | Medium-Mu Triode—                     | 6B       | 9FX              | 4.7                    | 0.6     | Triode Unit as Class A Amplifier   |
| 5CM8                    | High-Mu Triode—Sharp-Cutoff Pentode   | 6B       | 9FZ              | 6.3                    | 0.45    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 5CQ8                    | Medium-Mu Triode—Sharp-Cutoff Pentode | 6B       | 9GE              | 4.7                    | 0.6     | Class A Amplifier  |
| 5DH8                    | High-Mu Triode—Sharp-Cutoff Pentode   | 6B       | 9EG              | 5.2                    | 0.6     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 5DJ4                    | Full-Wave Rectifier                   | 19E      | 8KS              | 5.0                    | 3.0     | With Capacitive-Input Filter<br>With Inductive-Input Filter                                    |
| 5ES8<br>5ES8/<br>YCC189 | Variable-Mu Twin-Triode               | 6B       | 9AJ              | 5.6                    | 0.45    | Each Unit as Class A Amplifier<br>Cascade Type Amplifier                                       |
| 5EU8                    | Medium-Mu Triode—Sharp-Cutoff Pentode | 6B       | 9JF              | 4.7                    | 0.6     | Class A Amplifier  |
| 5FV8                    | Medium-Mu Triode—Sharp-Cutoff Pentode | 6B       | 9FA              | 4.7                    | 0.6     | Class A Amplifier  |
| 5GJ7                    | Medium-Mu Triode—Sharp-Cutoff Pentode | 6J       | 9QA              | 5.6                    | 0.45    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 5GX6                    | Sharp-Cutoff Pentode                  | 5C       | 7EN              | 4.7                    | 0.6     | Class A Amplifier  |
| 5GX7                    | Medium-Mu Triode—Sharp-Cutoff Pentode | 6B       | 9QA              | 5.6                    | 0.45    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 5HA7                    | Dual Triode                           | 8A       | 12FQ             | 5.6                    | 0.45    | Each Unit as Class A Amplifier   |
| 5HG8                    | Medium-Mu Triode—Sharp-Cutoff Pentode | 6B       | 9MP              | 5.3                    | 0.45    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 5JK6                    | Sharp-Cutoff Pentode                  | 5C       | 7CM              | 4.9                    | 0.45    | Class A Amplifier  |
| 5JL6                    | Semiremote-Cutoff Pentode             | 5C       | 7CM              | 4.9                    | 0.45    | Class A Amplifier  |
| 5T4                     | Full-Wave Rectifier                   | 4        | 5T               | 5.0F                   | 2.0     | With Capacitive-Input Filter<br>With Inductive-Input Filter                                    |
| 5U4G                    | Full-Wave Rectifier                   | 27B      | 5T               | 5.0F                   | 3.0     | With Capacitive-Input Filter   |
| 5U9/<br>LCF201          | Medium-Mu Triode—Sharp-Cutoff Pentode | 6B       | 10K              | 5.9                    | 0.45    | Class A Amplifier  |
| 5V3                     | Full-Wave Rectifier                   | 19E      | 5T               | 5.0F                   | 3.8     | With Capacitive-Input Filter<br>With Inductive Input Filter                                    |
| 5V4G                    | Full-Wave Rectifier                   | 25       | 5L               | 5                      | 2       | With Capacitive-Input Filter<br>With Inductive-Input Filter                                    |

| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA                                  | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduc-<br>tance<br>Micromhos                             | Amplifi-<br>cation<br>Factor                            | Power        |                      | RCA<br>Type             |
|---|--|-------------------------|--------------------------------------|--|-------------------------------------|---|---|--------------|----------------------|-------------------------|
|   |  |                         |                                      |  |                                     |   |   | Load<br>Ohms | Out-<br>put<br>Watts |                         |
| 200   | 180Ω                                   | 150                     | 2.8                                  | 9.5  | 300000                              | 6200  | —   | —            | —                    | 5BT8                    |
| For other characteristics, refer to Type 6BW8                       |  |                         |                                      |  |                                     |   |   |              |                      | 5BW8                    |
| 125   | — 1V                                   | —                       | —                                    | 14   | 5000                                | 8000  | 40  | —            | —                    | 5CL8                    |
| For other characteristics, refer to 6CM8                            |  |                         |                                      |  |                                     |   |   |              |                      | 5CM8                    |
| For other characteristics, refer to Type 6CQ8                       |  |                         |                                      |  |                                     |   |   |              |                      | 5CQ8                    |
| 250   | 390Ω                                   | —                       | —                                    | 7.3  | 12000                               | 4400  | 53  | —            | —                    | 5DH8                    |
| 125   | 56Ω                                    | 125                     | 3.8                                  | 13.5   | 150000                              | 8600  | —   | —            | —                    | 5DH8                    |
| AC Volts per Plate (RMS), 450<br>Max. Peak Inverse Volts, 1700      |  |                         |                                      | DC Output mA, 275<br>Max Peak Plate mA, 1000                 |                                     |   | Min. Total Effect. Supply<br>Imp. per Plate, 67 ohms    |              |                      | 5D14                    |
| AC Volts per Plate (RMS), 550<br>Max. Peak Inverse Volts, 1700      |  |                         |                                      | DC Output mA, 275<br>Max Peak Plate mA, 1000                 |                                     |   | Min. Value of Input<br>Choke, 10 henries                |              |                      |                         |
| For other characteristics, refer to Type 6ES8/ECC189                |  |                         |                                      |  |                                     |   |   |              |                      | 5ES8<br>5ES8/<br>YCC189 |
| For other characteristics, refer to Type 6EU8                       |  |                         |                                      |  |                                     |   |   |              |                      | 5EU8                    |
| For other characteristics, refer to Type 6FV8A                      |  |                         |                                      |  |                                     |   |   |              |                      | 5FV8                    |
| 100   | — 3                                    | —                       | —                                    | 15   | —                                   | 9000  | 20  | —            | —                    | 5GJ7                    |
| 170   | — 1.2                                  | 120                     | 3                                    | 10   | 0.35                                | 11000   | 55  | —            | —                    | 5GJ7                    |
| 150   | 180Ω                                   | 100                     | 3                                    | 3.7  | 140000                              | 3700<br>(Grid-No.<br>1 to Plate)<br>750<br>(Grid-No.<br>3 to Plate) | —   | —            | —                    | 5GX6                    |
| 100   | —                                      | —                       | —                                    | 12.5   | —                                   | 8700  | 40  | —            | —                    | 5GX7                    |
| 125   | — 1V                                   | —                       | —                                    | 13   | 4700                                | 8500  | —   | —            | —                    |                         |
| 120   | —                                      | 90                      | 2.8                                  | 8.5  | —                                   | 13000   | —   | —            | —                    | 5GX7                    |
| 125   | — 1V                                   | 125                     | 2.5                                  | 8  | 200000                              | 11000   | —   | —            | —                    |                         |
| For other characteristics, refer to Type 4HA7                       |  |                         |                                      |  |                                     |   |   |              |                      | 5HA7                    |
| For other characteristics, refer to Type 6HG8                       |  |                         |                                      |  |                                     |   |   |              |                      | 5HG8                    |
| For other characteristics, refer to Type 6JK6                       |  |                         |                                      |  |                                     |   |   |              |                      | 5JK6                    |
| 125   | 68Ω                                    | 60                      | 4                                    | 12.5   | 120000                              | 15500   | —   | —            | —                    | 5JL6                    |
| Max. AC Volts per Plate (RMS), 450<br>Max. Peak Inverse Volts, 1550 |  |                         |                                      | Max. DC Output mA, 225<br>Max. Peak Plate mA, 675            |                                     |   | Min. Total Effect. Supply<br>Imped. per Plate, 150 ohms |              |                      | 5T4                     |
| Max. AC Volts per Plate (RMS), 550<br>Max. Peak Inverse Volts, 1550 |  |                         |                                      | Max. DC Output mA, 225<br>Max. Peak Plate mA, 675            |                                     |   | Min. Value of Input Choke,<br>10 henries                |              |                      |                         |
| Max. AC Volts per Plate (RMS), 450<br>Max. Peak Inverse Volts, 1550 |  |                         |                                      | Max. DC Output mA, 225<br>Max. Peak Plate mA, 675            |                                     |   | Min. Total Effect. Supply<br>Imped. per Plate, 170 ohms |              |                      | 5U4G                    |
| For other characteristics, refer to Type 6U9/ECF201                 |  |                         |                                      |  |                                     |   |   |              |                      | 5U9/<br>LCF201          |
| Max. AC Volts per Plate (RMS), 425<br>Max. Peak Inverse Volts, 1400 |  |                         |                                      | Max. DC Output mA, 350<br>Max. Peak Plate mA per Plate, 1200 |                                     |   | Min. Total Effect. Supply Imped. per Plate, 56 ohms     |              |                      | 5V3                     |
| Max. AC Volts per Plate (RMS), 500<br>Max. Peak Inverse Volts, 1400 |  |                         |                                      | Max. DC Output mA, 350<br>Max. Peak Plate mA per Plate, 1200 |                                     |   | Min. Value of Input Choke, 10 henries                   |              |                      |                         |
| Max. AC Volts per Plate (RMS), 375<br>Max. Peak Inverse Volts, 1400 |  |                         |                                      | Max. DC Output mA, 175<br>Max. Peak Plate mA per Plate, 525  |                                     |   | Min. Total Effect. Supply Imped. per Plate, 100 ohms    |              |                      | 5V4G                    |
| Max. AC Volts per Plate (RMS), 500<br>Max. Peak Inverse Volts, 1400 |  |                         |                                      | Max. DC Output mA, 175<br>Max. Peak Plate mA per Plate, 525  |                                     |   | Min. Value of Input Choke, 4 henries                    |              |                      |                         |

| RCA Type               | Name                                      | Out-line         | Terminal Diagram | Heater or Filament (F) |                 | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|------------------------|---|------------------|------------------|------------------------|-----------------|--|
|                        |   |                  |                  | Volts                  | Amperes         |  |
|                        |   |                  |                  | 5V6GT                  | Beam Power Tube |  |
| 5W4<br>5W4GT           | Full-Wave Rectifier                       | 2B<br>13E        | 5T<br>5T         | 5.0F                   | 1.5             | With Capacitive-Input Filter   |
| 5X4G                   | Full-Wave Rectifier                       | 27B              | 5Q               | 5.0F                   | 3.0             |  |
| 5Y3G                   | Full-Wave Rectifier                       | 25               | 5T               | 5.0F                   | 2.0             | With Capacitive-Input Filter   |
| 5Y4G<br>5Y4GA<br>5Y4GT | Full-Wave Rectifier                       | 25<br>19E<br>13E | 5Q<br>5Q<br>5Q   | 5.0F                   | 2.0             |  |
| 5Z3                    | Full-Wave Rectifier                       | 27B              | 4C               | 5.0F                   | 3.0             |  |
|                        |   |                  |                  |                        |                 | With Capacitive-Input Filter   |
| 5Z4                    | Full-Wave Rectifier                       | 2B               | 5L               | 5.0                    | 2.0             | With Inductive-Input Filter  |
| 6A3                    | Power Triode                              | 27B              | 4D               | 6.3F                   | 1.0             | Amplifier  |
| 6A6                    | High-Mu Twin Power Triode                 | 28               | 7B               | 6.3                    | 0.8             | Amplifier  |
| 6A7<br>6A7S            | Pentagrid Converter                       | 24B<br>24B       | 7C               | 6.3                    | 0.3             | Converter  |
| 6A8<br>6A8G<br>6A8GT   | Pentagrid Converter                       | 3<br>23<br>14A   | 8A<br>8A<br>8A   | 6.3                    | 0.3             | Converter  |
| 6AB5/<br>6N5           | Electron-Ray Tube                         | 22 or<br>13H     | 6R               | 6.3                    | 0.15            | Visual Indicator   |
| 6AB7                   | Sharp-Cutoff Pentode                      | 2A               | 8N               | 6.3                    | 0.45            | Class A Amplifier<br>Class B Amplifier   |
| 6AC5GT                 | High-Mu Power Triode                      | 13D              | 6Q               | 6.3                    | 0.4             | Dynamic-Coupled Amplifier With<br>76 Driver  |
| 6AC7                   | Sharp-Cutoff Pentode                      | 2A               | 8N               | 6.3                    | 0.45            | Class A Amplifier  |
| 6AD6G                  | Electron-Ray Tube                         | 29E              | 7AG              | 6.3                    | 0.15            | Visual Indicator   |
| 6AD7G                  | Low-Mu Triode—Power Pentode               | 25               | 8AY              | 6.3                    | 0.85            | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 6AE5GT                 | Low-Mu Triode                             | 13D              | 8Q               | 6.3                    | 0.3             | Class A Amplifier  |
|                        |   |                  |                  |                        |                 | Remote Cutoff Triode   |
| 6AE6G                  | Twin-Plate Control Tube                   | 22               | 7AH              | 6.3                    | 0.15            | Sharp-Cutoff Triode  |
| 6AE7GT                 | Twin-Input Triode                         | 13D              | 7AX              | 6.3                    | 0.5             | Class A Amplifier  |
| 6AG7Y*                 | Power Pentode                             | 2B               | 8Y               | 6.3                    | 0.65            | Class A Amplifier  |
| 6AG11                  | Twin Diode—Twin Triode                    | 8A               | 12DA             | 6.3                    | 0.75            | Each Triode as Class A Amplifier   |
| 6AH4GT                 | Low-Mu Triode                             | 13D              | 8EL              | 6.3                    | 0.75            | Vertical Deflection Amplifier  |
| 6AH6                   | Sharp-Cutoff Pentode                      | 5C               | 7BK              | 6.3                    | 0.45            | Class A Amplifier  |
|                        |   |                  |                  |                        |                 | Triode Unit as Class A Amplifier   |
| 6AH9                   | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 8B               | 12HJ             | 6.3                    | 0.9             | Pentode Unit as Class A Amplifier  |
| 6AK8/<br>EABC80        | Triple Diode—<br>High-Mu Triode           | 6E               | 9E               | 6.3                    | 0.45            | Triode Unit as Class A Amplifier   |
| 6AK10                  | High-Mu Triple Triode                     | 8C               | 12FE             | 6.3                    | 0.9             | Each Unit as Class A Amplifier   |
| 6AL3                   | Half-Wave Rectifier                       | 7D               | 9CB              | 6.3                    | 1.55            | Television Damper Service  |

| Plate<br>Volts   | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA  | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduc-<br>tance<br>Micromhos   | Amplifi-<br>cation<br>Factor | Power        |                      | RCA<br>Type               |
|--|--|-------------------------|---------------------------------------|-----------------------------|-------------------------------------|---|------------------------------|--------------|----------------------|---------------------------|
|  |  |                         |                                       |                             |                                     |   |                              | Load<br>Ohms | Out-<br>put<br>Watts |                           |
| For other characteristics, refer to Type 6V6GT   |  |                         |                                       |                             |                                     |   |                              |              |                      | 5V6GT                     |
| Max. Peak Inverse Volts, 1400  |  |                         | Max. DC Output mA, 100                |                             |                                     | Max. Peak Plate mA, 300   |                              |              |                      | 5W4<br>5W4GT              |
| For other ratings, refer to Type 5U4G  |  |                         |                                       |                             |                                     |   |                              |              |                      | 5X4G                      |
| Max. AC Volts per Plate (RMS), 350   |  |                         | Max. DC Output mA, 125                |                             |                                     | Min. Total Effect. Supply Imped. per Plate, 50 ohms   |                              |              |                      | 5Y3G                      |
| Max. Peak Inverse Volts, 1400  |  |                         | Max. Peak Plate mA, 440               |                             |                                     |   |                              |              |                      | 5Y4G<br>5Y4GA<br>5Y4GT    |
| Max. Peak Plate mA, 375 (5Y4G)   |  |                         | For other ratings, refer to Type 5Y3G |                             |                                     |   |                              |              |                      | 5Z3                       |
| Max. Peak Plate mA, 400 (5Y4GA, 5Y4GT)   |  |                         |                                       |                             |                                     |   |                              |              |                      | 5Z3                       |
| For other ratings, refer to Type 5U4G  |  |                         |                                       |                             |                                     |   |                              |              |                      | 5Z3                       |
| Max. AC Volts per Plate (RMS), 350   |  |                         | Max. DC Output mA, 125                |                             |                                     | Min. Total Effect Supply Imped. per Plate, 50 ohms  |                              |              |                      | 5Z4                       |
| Max. Peak Inverse Volts, 1400  |  |                         | Max. Peak Plate mA, 375               |                             |                                     |   |                              |              |                      | 5Z4                       |
| Max. AC Volts per Plate (RMS), 500   |  |                         | Max. DC Output mA, 125                |                             |                                     | Min. Value of Input Choke, 5 henries  |                              |              |                      | 5Z4                       |
| Max. Peak Inverse Volts, 1400  |  |                         | Max. Peak Plate mA, 375               |                             |                                     |   |                              |              |                      | 5Z4                       |
| For other characteristics, refer to Type 6B4G  |  |                         |                                       |                             |                                     |   |                              |              |                      | 6A3                       |
| For other characteristics, refer to Type 6N7GT   |  |                         |                                       |                             |                                     |   |                              |              |                      | 6A6                       |
| For other characteristics, refer to Type 6A8   |  |                         |                                       |                             |                                     |   |                              |              |                      | 6A7<br>6A7S               |
| 250  | — 3V                                   | 100                     | 2.7                                   | 3.5                         | 360000                              | Anode-Grid (2): 250 max. V, 4.0 mA<br>Oscillator-Grid (1) Res. Conversion<br>Transcond., 550 $\mu$ mhos |                              |              | 6A8<br>6A8G<br>6A8GT |                           |
| Plate & Target Supply = 135 volts. Triode Plate Resistor = 0.25 M $\Omega$ Target Current = 2.0 mA<br>Grid Bias, — 10.0 volts; Shadow Angle, 0°. Bias, 0 volts; Angle, 90°; Plate Current, 0.5 mA. |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AB5/<br>6N5              |
| Plate & Target Supply = 135 volts. Triode Plate Resistor = 1.0 M $\Omega$ Target Current = 1.9 mA<br>Grid Bias, — 15.5 volts; Shadow Angle, 0°. Bias, 0 volts; Angle, 90°; Plate Current, 0.13 mA  |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AB5/<br>6N5              |
| 300  | — 3V                                   | 200                     | 3.2                                   | 12.5                        | 700000                              | 5000  |                              |              | 6AB7                 |                           |
| 250  | 0V                                     |                         |                                       | 5.0                         |                                     |   |                              | 10000        | 8.0†                 |                           |
| Bias for both 6AC5GT and 76 is developed in coupling circuit   |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AC5GT                    |
| Average Plate Current of Driver = 5.5 milliamperes   |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AC5GT                    |
| Average Plate Current of 6AC5GT = 32 milliamperes  |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AC5GT                    |
| 300  | 160 $\Omega$                           | 150                     | 2.5                                   | 10.0                        | 1 M                                 | 9000  |                              |              | 6AC7                 |                           |
| Target Voltage, 150 volts. Control-Electrode Voltage, —50 volts; Shadow Angle, 135°; Target Current, 1.2 mA Control-Electrode Voltage, 75 volts; Angle, 0°; Target Current, 3 mA                   |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AD6G                     |
| 250  | —25V                                   |                         |                                       | 3.7                         | 19000                               | 325   | 6                            |              |                      |                           |
| 250  | —16.5V                                 | 250                     | 6.5                                   | 34.0                        | 80000                               | 2500  |                              | 7000         | 3.2                  |                           |
| 95   | —15V                                   |                         |                                       | 7.0                         | 3500                                | 1200  | 4.2                          |              |                      |                           |
| 250  | —1.5V                                  |                         |                                       | 6.5                         | 25000                               | 1000  | 25                           |              |                      |                           |
| 250  | —35V                                   |                         |                                       | 0.01                        |                                     |   |                              |              |                      |                           |
| 250  | —1.5V                                  |                         |                                       | 4.5                         | 35000                               | 950   | 33                           |              |                      |                           |
| 250  | —9.5V                                  |                         |                                       | 0.01                        |                                     |   |                              |              |                      |                           |
| 250  | —13.5V                                 |                         |                                       | 10.0                        | 4650                                | 3000  | 14                           |              |                      |                           |
| For other characteristics, refer to Type 6AG7  |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AE5GT<br>6AE6G<br>6AE7GT |
| 125  | —1V                                    |                         |                                       | 7.5                         | 8500                                | 7800  | 66                           |              |                      |                           |
| Max. DC Plate Volts, 500<br>Max. DC Cathode mA, 60   |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AG7Y†<br>6AG11           |
| Max. Peak Positive-Pulse Plate Volts, 2000<br>Max. Plate Dissipation, 7.5 watts  |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AH4GT                    |
| 300  | 160 $\Omega$                           | 150                     | 2.5                                   | 10.0                        | 500000                              | 9000  |                              |              |                      |                           |
| 250  | —9V                                    |                         |                                       | 8                           | 7300                                | 2750  | 20                           |              |                      |                           |
| 250  | 122 $\Omega$                           | 150                     | 6                                     | 25                          | 5500                                | 21000   |                              |              |                      |                           |
| 50   | 0                                      | 125                     | 32                                    | 76                          |                                     |   |                              |              |                      |                           |
| 250  | —3V                                    |                         |                                       | 1                           | 58000                               | 1200  | 70                           |              |                      |                           |
| 100  | —1V                                    |                         |                                       | 0.8                         | 54000                               | 1300  | 70                           |              |                      |                           |
| Max. Peak Inverse Plate Volts, 7500 (Abs.)<br>Max. Peak Plate mA, 550<br>Max. DC Plate mA, 220   |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AK8/<br>EABC80<br>6AK10  |
| Max. Plate Dissipation, 5 watts<br>Max. Peak Heater-Cathode Volts, 6600  |  |                         |                                       |                             |                                     |   |                              |              |                      | 6AL3                      |

† For two tubes at stated plate-to-plate load.

□ For two tubes.

| RCA<br>Type         | Name  | Out-<br>line | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |              | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|---------------------|---|--------------|--------------------------|---------------------------|--------------|--|
|                     |   |              |                          | Volts                     | Amperes      |  |
|                     |   |              |                          |                           |              |  |
| 6AL7GT              | Electron-Ray Tube                             | 13C          | 8CH                      | 6.3                       | 0.15         | Visual Indicator   |
| 6AM4                | High-Mu Triode                                | 6A           | 9BX                      | 6.3                       | 0.225        | Class A Amplifier  |
| 6AM8                | Diode—Sharp-Cutoff Pentode                    | 6B           | 9CY                      | 6.3<br>6.3                | 0.45<br>0.45 | Diode Unit<br>Pentode Unit as Class A<br>Amplifier   |
| 6AN4                | High-Mu Triode                                | 5B           | 7DK                      | 6.3                       | 0.225        | Class A Amplifier  |
| 6AN5 <sup>†</sup>   | Beam Power Tube                               | 5C           | 7BD                      | 6.3                       | 0.45         | Class A Amplifier  |
| 6AN8                | Medium-Mu Triode—Sharp-Cutoff<br>Pentode      | 6B           | 9DA                      | 6.3<br>6.3                | 0.45<br>0.45 | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                                 |
| 6AQ5                | Beam Power Tube                               | 5D           | 7BZ                      | 6.3<br>6.3                | 0.45<br>0.45 | Single Tube Class A Amplifier<br>Push-Pull Class A <sub>1</sub> Amplifier                                |
| 6AQ6                | Twin-Diode—High-Mu Triode                     | 5C           | 7BT                      | 6.3                       | 0.15         | Triode Unit as Class A Amplifier   |
| 6AQ7GT              | Twin-Diode—High-Mu Triode                     | 13D          | 8CK                      | 6.3                       | 0.3          | Triode Unit as Class A Amplifier   |
| 6AQ8                | High-Mu Twin Triode                           | 6B           | 9AJ                      | 6.3                       | 0.435        | Each Unit as Class A Amplifier   |
| 6AR5                | Power Pentode                                 | 5D           | 8CC                      | 6.3                       | 0.4          | Class A Amplifier  |
| 6AR8                | Beam-Deflection Tube                          | 6E           | 9DP                      | 6.3                       | 0.3          | Color TV Demodulator   |
| 6AS6 <sup>†</sup>   | Dual Control RF Pentode                       | 5B           | 7CM                      | 6.3                       | 0.175        | Class A Amplifier  |
| 6AS7GA <sup>†</sup> | Low-Mu Twin Triode                            | 19E          | 8BD                      | 6.3                       | 2.5          | Voltage Regulator  |
| 6AS11               | Dual Triode—Sharp-Cutoff<br>Pentode           | 8B           | 12DP                     | 6.3                       | 1.05         | Dual Triode Unit as Class A<br>Amplifier<br>Pentode Unit as Class A<br>Amplifier                         |
| 6AT8                | Medium-Mu Triode                              | 6B           | 9DW                      | 6.3                       | 0.45         | Triode Unit as Class A Amplifier   |
| 6AU4GT              | Half-Wave Rectifier                           | 13G          | 4CG                      | 6.3                       | 1.8          | Television Damper Service  |
| 6AU6                | Sharp-Cutoff Pentode                          | 5C           | 7BK                      | 6.3<br>6.3                | 0.3<br>0.3   | Class A Amplifier  |
| 6AU7                | Medium-Mu Twin Triode                         | 6B           | 9A                       | 3.15<br>6.3               | 0.6<br>0.3   | Each Unit as Class A Amplifier   |
| 6AU8                | Medium-Mu Triode—Sharp-Cutoff<br>Pentode      | 6E           | 9DX                      | 6.3                       | 0.6          | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                                 |
| 6AV5GT              | Beam Power Tube                               | 13D          | 6CK                      | 6.3                       | 1.2          | Horizontal Deflection Amplifier  |
| 6AV11               | Medium-Mu Triple Triode                       | 8A           | 12BY                     | 6.3                       | 0.6          | Each Unit as Class A Amplifier   |
| 6AW8                | High-Mu Triode—Sharp-Cutoff<br>Pentode        | 6E           | 9DX                      | 6.3                       | 0.6          | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                                 |
| 6AX4GT              | Half-Wave Rectifier                           | 13D          | 4CG                      | 6.3                       | 1.2          | Television Damper Service  |
| 6AX8                | Medium-Mu Triode—Semiremote<br>Cutoff Pentode | 6B           | 9AE                      | 6.3                       | 0.45         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                                 |
| 6AY3                | Half-Wave Rectifier                           | 11D          | 9HP                      | 6.3                       | 1.2          | Television Damper Service  |
| 6AY11               | Twin Diode—High-Mu Twin Triode                | 8A           | 12DA                     | 6.3                       | 0.69         | Each Triode Unit as Class A<br>Amplifier   |
| 6B4G                | Power-Triode                                  | 27B          | 5S                       | 6.3F                      | 1.0          | Class A Amplifier  |
| 6B5                 | Direct-Coupled Power Triode                   | 26           | 6AS                      | 6.3                       | 0.8          | Class A Amplifier  |
| 6B6G                | Twin-Diode—High-Mu Triode                     | 23           | 7V                       | 6.3                       | 0.3          | Triode Unit as Amplifier   |

† Industrial type



| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Current<br>mA | Plate<br>Current<br>mA | AC Plate<br>Resistance<br>Ohms  | Trans-<br>conductance<br>Micromhos  | Amplifi-<br>cation<br>Factor | Power        |                      | RCA<br>Type |
|---|--|-------------------------|---------------------------------|------------------------|---|---|------------------------------|--------------|----------------------|-------------|
|   |  |                         |                                 |                        |   |   |                              | Load<br>Ohms | Out-<br>put<br>Watts |             |
| Target Voltage, 315 volts<br>Grid Voltage = 0 volts<br>Cathode Bias Res., 3300 ohms approx. |  |                         |                                 |                        |   | Grid Voltage for Pattern Cutoff, -7 volts approx.<br>Deflecting-Electrodes—No. 1, No. 2 and No. 3<br>Voltage, 0 |                              |              |                      | 6AL7GT      |
| 200   | 100Ω                                   | —                       | —                               | 10                     | 8700  | 9800  | 85                           | —            | —                    | 6AM4        |
| Max. DC Plate mA, 5      Max. Peak Heater-Cathode Volts, ±200                               |  |                         |                                 |                        |   |   |                              |              |                      |             |
| 125   | 56Ω                                    | 125                     | 3.2                             | 12.5                   | —   | 7800  | —                            | —            | —                    | 6AM8        |
| 200   | 100Ω                                   | —                       | —                               | 13                     | 7000  | 10000   | 70                           | —            | —                    | 6AN4        |
| 120   | 120Ω                                   | 120                     | 12                              | 35                     | 12500   | 8000  | —                            | 2500         | 1.3                  | 6AN5†       |
| 150   | — 3V                                   | —                       | —                               | 15                     | 4500  | 4700  | 31                           | —            | —                    | —           |
| 125   | 56Ω                                    | 125                     | 3.8                             | 12                     | 170000  | 7800  | —                            | —            | —                    | 6AN8        |
| 180   | — 8.5V                                 | 180                     | 3.0                             | 29.0                   | 50000   | 3700  | —                            | 5500         | 2.0                  | —           |
| 250   | —12.5V                                 | 250                     | 4.5                             | 45.0                   | 50000   | 4100  | —                            | 5000         | 4.5                  | 6AQ5        |
| 250   | —15V                                   | 250                     | 5.0□                            | 70.0□                  | 60000   | —   | —                            | 10000        | 10.0†                | —           |
| 100   | — 1V                                   | —                       | —                               | 0.8                    | 61000   | 1150  | 70                           | —            | —                    | 6AQ6        |
| 250   | — 3V                                   | —                       | —                               | 1.0                    | 58000   | 1200  | 70                           | —            | —                    | —           |
| 250   | — 2V                                   | —                       | —                               | 2.3                    | 44000   | 1600  | 70                           | —            | —                    | 6AQ7GT      |
| 250   | — 2.3V                                 | —                       | —                               | 10                     | —   | 5900  | 57                           | —            | —                    | 6AQ8        |
| 250   | —18V                                   | 250                     | 5.5                             | 32.0                   | 90000   | 2300  | —                            | 7600         | 3.4                  | 6AR5        |
| 250   | 300Ω                                   | 250                     | —                               | 10                     | —   | 4000  | —                            | —            | —                    | 6AR8        |
| 120   | —2V                                    | 120                     | 3.5                             | 5.2                    | 110000  | 3200  | —                            | (EC3 = 0V)   | —                    | 6AS6†       |
| For other characteristics, refer to Type 6AS7G  |  |                         |                                 |                        |   |   |                              |              |                      | 6AS7GA†     |
| 200   | 220Ω                                   | —                       | —                               | 9.2                    | 4400  | 4400  | 41                           | —            | —                    | —           |
| 200   | — 2V                                   | —                       | —                               | 7                      | 12400   | 5500  | 68                           | —            | —                    | —           |
| 200   | 125                                    | 125                     | 5.2                             | 24                     | 70000   | 10500   | —                            | —            | —                    | 6AS11       |
| 125   | — 1V                                   | —                       | —                               | 12                     | 6000  | 6500  | 40                           | —            | —                    | 6AT8        |
| Max. Peak Inverse Plate Volts, 4500 (Absolute)<br>Max. Peak Plate mA, 105U                  |  |                         |                                 |                        | Max. Average Plate mA, 175<br>Max. Plate Dissipation 6.0 watts                                |   |                              |              |                      | 6AU4GT      |
| 100   | 150Ω                                   | 100                     | 2.1                             | 5.0                    | 500000  | 3900  | —                            | —            | —                    | —           |
| 250   | 68Ω                                    | 150                     | 4.3                             | 10.6                   | 1 M   | 5200  | —                            | —            | —                    | 6AU6        |
| 100   | 0V                                     | —                       | —                               | 11.8                   | 6250  | 3500  | 19.5                         | —            | —                    | —           |
| 250   | — 8.5V                                 | —                       | —                               | 10.5                   | 7700  | 2200  | 17                           | —            | —                    | 6AU7        |
| 150   | 150Ω                                   | —                       | —                               | 9                      | 8200  | 4900  | 40                           | —            | —                    | —           |
| 200   | 82Ω                                    | 125                     | 3.4                             | 15                     | 150000  | 7000  | —                            | —            | —                    | 6AU8        |
| Max. DC Plate Volts, 550<br>Max. DC Cathode mA, 110   |  |                         |                                 |                        | Max. Peak Positive-Pulse Plate Volts, 5500 (Abs.)<br>Max. Plate Dissipation, 11 watts         |   |                              |              |                      | 6AV5GT      |
| 250   | —8.5V                                  | —                       | —                               | 10.5                   | 7700  | 2200  | 17                           | —            | —                    | —           |
| 100   | 0V                                     | —                       | —                               | 11.8                   | 6500  | 3100  | 20                           | —            | —                    | 6AV11       |
| 200   | — 2V                                   | —                       | —                               | 4                      | —   | 4000  | 70                           | —            | —                    | —           |
| 150   | 150Ω                                   | 150                     | 3.5                             | 13                     | 200000  | 9500  | —                            | —            | —                    | 6AW8        |
| 6AW8A Features a plate current characteristic with a controlled knee                        |  |                         |                                 |                        |   |   |                              |              |                      |             |
| Max. Peak Inverse Plate Volts, 4400<br>Max. Peak Plate mA, 750<br>Max. DC Plate mA, 125     |  |                         |                                 |                        | Max. Peak Heater-Cathode Volts: { -4400**<br>+300<br>**DC component must not exceed 900 volts |   |                              |              |                      | 6AX4GT      |
| 150   | 560Ω                                   | —                       | —                               | 18                     | 5000  | 8500  | 40                           | —            | —                    | —           |
| 250   | 120Ω                                   | 110                     | 3.5                             | 10                     | 400000  | 4800  | —                            | —            | —                    | 6AX8        |
| Max. Peak Inverse Plate Volts, 5000<br>Max. Peak Plate mA, 1100<br>Max. DC Plate mA 175     |  |                         |                                 |                        | Max. Plate Dissipation, 6.5 watts<br>Max. Peak Heater-Cathode Volts: { -5000<br>+300          |   |                              |              |                      | 6AY3        |
| 250   | — 2V                                   | —                       | —                               | 1.2                    | 52700   | 1900  | 100                          | —            | —                    | 6AY11       |
| 250   | —45V                                   | —                       | —                               | 60                     | 800   | 5250  | 4.2                          | 2500         | 3.5                  | 6B4G        |
| For other characteristics, refer to Type 6N6G   |  |                         |                                 |                        |   |   |                              |              |                      | 6B5         |
| For other characteristics, refer to Type 6SQ7   |  |                         |                                 |                        |   |   |                              |              |                      | 6B6G        |

† For two tubes at stated plate-to-plate load.

□ For two tubes.

| RCA Type        | Name                                      | Out-line   | Terminal Diagram | Heater or Filament (F) |              | Use<br>Values to right give operating conditions and characteristics for indicated typical use              |
|-----------------|---|------------|------------------|------------------------|--------------|---|
|                 |   |            |                  | Volts                  | Amperes      |   |
|                 |   |            |                  |                        |              |   |
| 6B7<br>6B7S     | Twin-Diode—Remote-Cutoff Pentode          | 24B<br>24B | 7D               | 6.3                    | 0.3          | Pentode Unit as Amplifier   |
| 6B8             | Twin-Diode—Semiremote-Cutoff Pentode      | 3          | 8E               | 6.3                    | 0.3          | Pentode Unit as Amplifier   |
| 6B8G            | Twin Diode—Semiremote-Cutoff Pentode      | 23         | 8E               | 6.3                    | 0.3          | Pentode Unit as Class A Amplifier   |
| 6BA3            | Half-Wave Vacuum Rectifier                | 30B        | 9H1              | 6.3                    | 1.2          | Television Damper Service   |
| 6BC5            | Sharp-Cutoff Pentode                      | 5C         | 7BD              | 6.3                    | 0.3          | Class A Amplifier   |
| 6BC7            | Triple Diode                              | 6B         | 9AX              | 6.3                    | 0.45         | Each Unit—Half-Wave Rectifier   |
| ★6BD4           | Sharp-Cutoff Beam Triode                  | 21C        | 8FU              | 6.3                    | 0.6          | Voltage-Control   |
| ★6BD4A          | Sharp-Cutoff Beam Triode                  | 21C        | 8FU              | 6.3                    | 0.6          | Voltage-Control   |
| 6BD6            | Remote-Cutoff Pentode                     | 5C         | 7BK              | 6.3                    | 0.3          | Class A Amplifier   |
| 6BD11           | Dual Triode—<br>Sharp-Cutoff Pentode      | 8B         | 12DP             | 6.3                    | 1.05         | Triode No. 1 as Class A Amplifier<br>Triode No. 2 as Class A Amplifier<br>Pentode Unit as Class A Amplifier |
| 6BF5            | Beam Power Tube                           | 5D         | 7BZ              | 6.3                    | 1.2          | Class A Amplifier   |
| 6BF6            | Twin-Diode—Medium-Mu Triode               | 5C         | 7BT              | 6.3                    | 0.3          | Triode Unit as Class A Amplifier  |
| 6BG6G<br>6BG6GA | Beam Power Tube                           | 28B<br>21B | 5BT<br>5BT       | 6.3                    | 0.9          | Horizontal Deflection Amplifier   |
| 6BH3<br>6BH3A   | Half-Wave Rectifier                       | 11D        | 9HP              | 6.3                    | 1.6          | Television Damper Service   |
| 6BH8A           | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6E         | 9DX              | 6.3                    | 0.6          | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                                       |
| 6BJ3            | Half-Wave Rectifier                       | 8C         | 12BL             | 6.3                    | 1.2          | Television Damper Service   |
| 6BJ6A           | Remote-Cutoff Pentode                     | 5C         | 7CM              | 6.3                    | 0.15         | Class A Amplifier   |
| 6BJ7            | Triple Diode                              | 6B         | 9AX              | 6.3                    | 0.45         | Each Unit—Half-Wave Rectifier   |
| 6BK4<br>★6BK4A  | Beam Triode                               | 21B        | 8GC              | 6.3                    | 0.2          | Voltage-Control   |
| ★6BK4B          | Beam Triode                               | 21B        | 8GC              | 6.3                    | 0.2          | Shunt Voltage Regulator   |
| 6BK5            | Beam Power Tube                           | 6E         | 9BQ              | 6.3                    | 1.2          | Class A Amplifier   |
| 6BK7A           | Medium-Mu Twin Triode                     | 6B         | 9AJ              | 6.3<br>6.3             | 0.45<br>0.45 | Each Unit as Class A Amplifier  |
| 6BL4            | Half-Wave Rectifier                       | 13F        | 8GB              | 6.3                    | 3.0          | Television Damper Service   |
| 6BL7GT          | Medium-Mu Twin Triode                     | 13D        | 8BD              | 6.3                    | 1.5          | Vertical Deflection Amplifier   |
| 6BL8            | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B         | 9DC              | 6.3                    | 0.45         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                                       |
| 6BN4            | Medium-Mu Triode                          | 5C         | 7EG              | 6.3                    | 0.2          | Class A Amplifier   |
| 6BN6            | Beam Tube                                 | 5D         | 7DF              | 6.3                    | 0.3          | Limiter and Discriminator   |
| 6BQ6GT          | Beam Power Tube                           | 14D        | 6AM              | 6.3                    | 1.2          | Horizontal Deflection Amplifier   |
| 6BQ7            | Medium-Mu Twin Triode                     | 6B         | 9AJ              | 6.3                    | 0.4          | Each Unit as Class A Amplifier  |
| 6BR8            | Medium-Mu Triode—Sharp-Cutoff<br>Pentode  | 6B         | 9FA              | 6.3<br>6.3             | 0.45<br>0.45 | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                                       |

★ See Safety Precautions at end of this section.

| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts   | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA  | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>con-<br>duct-<br>ance<br>Micromhos | Ampli-<br>fica-<br>tion<br>Factor | Power                               |                      | RCA<br>Type     |
|---|--|---|--------------------------------------|--|-------------------------------------|--|-----------------------------------|-------------------------------------|----------------------|-----------------|
|   |  |   |                                      |  |                                     |  |                                   | Load<br>Ohms                        | Out-<br>put<br>Watts |                 |
| Input Triode:<br>Output Triode:   |  | Plate Volts, 500 max; Grid Volts, 0; Plate mA, 8; AF Signal Volts (Peak), 21<br>Plate Volts, 300 max.; Plate mA, 45; Plate Res., 24000 ohms; Load Resistance,<br>7000 ohms; Power Output, 4 watts |                                      |  |                                     |  |                                   |                                     |                      | 6B7<br>6B7S     |
| For other characteristics, refer to Type 12C8   |  |   |                                      |  |                                     |  |                                   |                                     |                      | 6B8             |
| 250   | -3V                                    | 125   | 2.3                                  | 9  | 600000                              | 1125   | —                                 | —                                   | —                    | 6B8G            |
| Max. Peak Inverse Plate Volts, 5000<br>Max. Peak Plate mA, 1000<br>Max. DC Plate mA, 165        |  |   |                                      | Max. Peak Heater-Cathode Volts { -5000**<br>+300<br>** DC Component must not exceed 900 Volts                |                                     |  |                                   |                                     |                      | 6BA3            |
| For other characteristics, refer to Type 6BC5/6CE5  |  |   |                                      |  |                                     |  |                                   |                                     |                      | 6BC5            |
| Max. Peak Inverse Plate Volts, 330<br>Max. Peak Plate mA, 54                                    |  |   |                                      | Max. DC Output mA, 12<br>Min. Total Effect. Plate Supply Impedance, 560Ω                                     |                                     |  |                                   |                                     |                      | 6BC7            |
| Max. DC Plate Volts, 20000<br>Max. Unregulated DC Supply Volts, 40000                           |  |   |                                      | Max. DC Plate mA, 1.5<br>Max. Plate Dissipation, 20.0 watts  |                                     |  |                                   |                                     |                      | 6BD4            |
| Max. DC Plate Volts, 27000<br>Max. Unregulated DC Supply Volts, 55000                           |  |   |                                      | Max. DC Plate mA, 1.5<br>Max. Plate Dissipation, 25.0 watts  |                                     |  |                                   |                                     |                      | 6BD4A           |
| 250   | -3V                                    | 100   | 3.0                                  | 9.0  | 800000                              | 2000   | —                                 | —                                   | —                    | 6BD6            |
| 200   | -2V                                    | —   | —                                    | 7  | 12400                               | 5500   | 68                                | —                                   | —                    | 6BD11           |
| 200   | 220Ω                                   | —   | —                                    | 9.2  | 9400                                | 4400   | 41                                | —                                   | —                    |                 |
| 135   | 100Ω                                   | 135   | 4                                    | 17   | 45000                               | 10400  | —                                 | —                                   | —                    |                 |
| 110   | -7.5V                                  | 110   | 4.0                                  | 36.0   | 12000                               | 7500   | —                                 | 2500                                | 1.9                  | 6BF5            |
| 250   | -9V                                    | —   | —                                    | 9.5  | 8500                                | 1900   | 16                                | Power Output,<br>300 milliwatts     |                      | 6BF6            |
| Max. DC Plate Volts, 700<br>Max. DC Cathode mA, 110   |  |   |                                      | Max. Peak Positive-Pulse Plate Volts, 6600 (Abs.)<br>Max. Plate Dissipation, 20 watts                        |                                     |  |                                   |                                     |                      | 6BG6G<br>6BG6GA |
| Max. Peak Inverse Plate Volts, 5500<br>Max. Peak Plate mA, 1100<br>Max. DC Plate mA, 180        |  |   |                                      | Max. Plate Dissipation, 6.5 watts<br>Max. Peak Heater-Cathode Volts: { -5500<br>+300                         |                                     |  |                                   |                                     |                      | 6BH3<br>6BH3A   |
| 150   | -5V                                    | —   | —                                    | 9.5  | 5150                                | 3300   | 17                                | —                                   | —                    | 6BH8A           |
| 200   | 82Ω                                    | 125   | 3.4                                  | 15   | 150000                              | 7000   | —                                 | —                                   | —                    |                 |
| Max. Peak Inverse Plate Volts, 3300<br>Max. Peak Plate mA, 840<br>Max. DC Plate mA, 140         |  |   |                                      | Max. Peak Heater-Cathode Volts { -3300**<br>+300<br>** DC component must not exceed 600 volts                |                                     |  |                                   |                                     |                      | 6BJ3            |
| 100   | -1V                                    | 100   | 3.5                                  | 9  | 250000                              | 3650   | —                                 | —                                   | —                    | 6BJ6A           |
| Max. Peak Inverse Plate Volts, 330<br>Max. Peak Plate mA, 10                                    |  |   |                                      | Max. DC Output mA, 1<br>Max. Peak Heater-Cathode Volts, -100, -330   |                                     |  |                                   |                                     |                      | 6BJ7            |
| Max. DC Plate Volts, 27000<br>Max. Unregulated DC Supply Volts, 60000                           |  |   |                                      | Max. DC Plate mA, 1.6<br>Max. Plate Dissipation, 25 Watts (6BK4)<br>Max. Plate Dissipation, 30 Watts (6BK4A) |                                     |  |                                   |                                     |                      | 6BK4<br>6BK4A   |
| Max. DC Plate Volts, 27000<br>Max. Unregulated DC Supply Volts, 60000                           |  |   |                                      | Max. Average Plate mA, 1.6<br>Max. Plate Dissipation, 40 Watts   |                                     |  |                                   |                                     |                      | 6BK4B           |
| 250   | -5V                                    | 250   | 3.5                                  | 35   | 100000                              | 8500   | —                                 | 6500                                | 3.5                  | 6BK5            |
| 150   | 56Ω                                    | —   | —                                    | 18   | 4600                                | 9300   | 43                                | Grid-No. 1 Volts<br>for Cutoff, -11 |                      | 6BK7A           |
| Max. Peak Inverse Plate Volts, 4500 (Abs.)<br>Max. Peak Plate mA, 1200<br>Max. DC Plate mA, 200 |  |   |                                      | Max. Peak Heater-Cathode Volts { -4500* (Abs.)<br>+300<br>*DC component not to exceed -900 volts             |                                     |  |                                   |                                     |                      | 6BL4            |
| Max. DC Plate Volts, 500<br>Max. DC Cathode mA. (Each Unit), 60                                 |  |   |                                      | Max. Peak Positive-Pulse Plate Volts, 2000 (Abs.)<br>Max. Plate Dissipation (Each Unit), 10 watts            |                                     |  |                                   |                                     |                      | 6BL7GT          |
| 100   | -2V                                    | —   | —                                    | 14   | —                                   | 5000   | 20                                | —                                   | —                    | 6BL8            |
| 170   | -2V                                    | 170   | 2.8                                  | 10   | 400000                              | 6200   | —                                 | —                                   | —                    |                 |
| 150   | 220Ω                                   | —   | —                                    | 9  | 6300                                | 6800   | 43                                | —                                   | —                    | 6BN4            |
| For other characteristics, refer to Type 6BN6/6KS6  |  |   |                                      |  |                                     |  |                                   |                                     |                      | 6BN6            |
| Max. DC Plate Volts, 550<br>Max. DC Cathode mA, 110   |  |   |                                      | Max. Peak Positive-Pulse Plate Volts, 5500 (Abs.)<br>Max. Plate Dissipation, 11 watts                        |                                     |  |                                   |                                     |                      | 6BQ6GT          |
| 150   | 220Ω                                   | —   | —                                    | 9.0  | 5800                                | 6000   | 35                                | Grid-No. 1 Volts<br>for Cutoff, -10 |                      | 6BQ7            |
| 125   | -1V                                    | —   | —                                    | 13.5   | 7500                                | —  | 40                                | —                                   | —                    | 6BR8            |
| 125   | -1V                                    | 110   | 3.5                                  | 9.5  | 200000                              | 5000   | —                                 | —                                   | —                    |                 |

| RCA Type      | Name                                  | Out-line  | Terminal Diagram | Heater or Filament (F) |              | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|---------------|---------------------------------------|-----------|------------------|------------------------|--------------|--|
|               |                                       |           |                  | Volts                  | Amperes      |  |
| 6BS3          | Half-Wave Rectifier                   | 11D       | 9HP              | 6.3                    | 1.2          | Television Damper Service  |
| 6BS8          | Medium-Mu Twin Triode                 | 6B        | 9AJ              | 6.3                    | 0.4          | Each Unit as Class A Amplifier   |
| 6BV8          | Twin Diode—Medium-Mu Triode           | 6B        | 9FJ              | 6.3                    | 0.6          | Triode Unit as Class A Amplifier<br>With Capacitive Input Filter                               |
| 6BW4          | Full-Wave Rectifier                   | 6E        | 9DJ              | 6.3                    | 0.9          | With Inductive Input Filter  |
| 6BW8          | Twin Diode—Sharp-Cutoff Pentode       | 6B        | 9HK              | 6.3                    | 0.45         | Pentode Unit as Class A Amplifier  |
| 6BX7GT        | Medium-Mu Twin Triode                 | 13D       | 8BD              | 6.3                    | 1.5          | Vertical Deflection Oscillator<br>Vertical Deflection Amplifier                                |
| 6BY5GA        | Full-Wave Rectifier                   | 18B       | 6CN              | 6.3                    | 1.6          | Television Damper Service  |
| 6BY11         | Beam Power Tube—Sharp-Cutoff Pentode  | 8C        | 12EZ             | 6.3                    | 1.2          | Beam Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                            |
| 6BZ7          | Medium-Mu Twin Triode                 | 6B        | 9AJ              | 6.3                    | 0.4          | Each Unit as Class A Amplifier   |
| 6BZ8          | Medium-Mu Twin Triode                 | 6B        | 9AJ              | 6.3                    | 0.4          | Each Unit as Class A Amplifier   |
| 6C5<br>6C5GT  | Medium-Mu Triode                      | 2A<br>14A | 6Q<br>6Q         | 6.3                    | 0.3          | Class A Amplifier  |
| 6C6           | Sharp-Cutoff Pentode                  | 24A       | 6F               | 6.3                    | 0.3          | Amplifier Detector   |
| 6C7           | Twin-Diode—Medium-Mu Triode           | 24B       | 7G               | 6.3                    | 0.3          | Triode Unit as Class A Amplifier   |
| 6C8G          | Medium-Mu Twin-Triode                 | 23        | 8G               | 6.3                    | 0.3          | Each Unit as Class A Amplifier   |
| 6C10          | High-Mu Triple Triode                 | 8A        | 12BQ             | 6.3                    | 0.6          | Each Unit as Class A Amplifier   |
| 6CA7          | Power Pentode                         |           | 8ET              | 6.3                    | 1.5          | Class A Amplifier<br>Push-Pull Class AB, Amplifier   |
| 6CB5          | Beam Power Tube                       | 28A       | 8GD              | 6.3                    | 2.5          | Horizontal Deflection Amplifier  |
| 6CB6          | Sharp-Cutoff Pentode                  | 5C        | 7CM              | 6.3                    | 0.3          | Class A Amplifier  |
| 6CD6G         | Beam Power Tube                       | 28B       | 5BT              | 6.3                    | 2.5          | Horizontal Deflection Amplifier  |
| 6CE3          | Half-Wave Vacuum Rectifier            | 8G        | 12GK             | 6.3                    | 2.5          | Television Damper Service  |
| 6CE5          | Sharp-Cutoff Pentode                  | 5C        | 7BD              | 6.3                    | 0.3          | Class A Amplifier  |
| 6CF6          | Sharp-Cutoff Pentode                  | 5C        | 7CM              | 6.3                    | 0.3          | Class A Amplifier  |
| 6CG3/<br>6CD3 | Half-Wave Rectifier                   | 8F        | 12FX             | 6.3                    | 1.8          | Television Damper Service  |
| 6CG8          | Medium-Mu Triode—Sharp-Cutoff Pentode | 6B        | 9GF              | 6.3<br>6.3             | 0.45<br>0.45 | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 6CH8          | Medium-Mu Triode—Sharp-Cutoff Pentode | 6B        | 9FT              | 6.3                    | 0.45         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 6CK3          | Half-Wave Vacuum Rectifier            | 30B       | 9HP              | 6.3                    | 1.2          | Television Damper Service  |
| 6CK4          | Low-Mu Triode                         | 13F       | 8JB              | 6.3                    | 1.25         | Vertical Deflection Amplifier  |
| 6CL8          | Medium-Mu Triode—Sharp-Cutoff Tetrode | 6B        | 9FX              | 6.3                    | 0.45         | Triode Unit as Class A Amplifier<br>Tetrode Unit as Class A Amplifier                          |

| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduct-<br>ance<br>Micromhos                            | Amplifi-<br>cation<br>Factor | Power  |                      | RCA<br>Type   |
|---|--|-------------------------|--------------------------------------|-----------------------------|-------------------------------------|--|------------------------------|--|----------------------|---------------|
|   |  |                         |                                      |                             |                                     |  |                              | Load<br>Ohms   | Out-<br>put<br>Watts |               |
| Max. Peak Inverse Plate Volts, 5000<br>Max. Peak Plate mA, 1100<br>Max. DC Plate mA, 200        |  |                         |                                      |                             |                                     | Max. Plate Dissipation, 6 watts<br>Max. Peak Heater-Cathode Volts: |                              | { -5000<br>+300  |                      | 6BS3          |
| 150   | 220Ω                                   | —                       | —                                    | 10                          | 5000                                | 7200   | 36                           |  |                      |               |
| 200   | 330Ω                                   | —                       | —                                    | 11                          | 5900                                | 5600   | 33                           | —  | —                    | 6BV8          |
| Max. AC Volts per Plate (RMS), 325<br>Max. Peak Inverse Volts, 1275                             |  |                         |                                      |                             |                                     | Max. DC Output mA, 62.5<br>Max. Peak Plate mA, per Plate, 350      |                              |  |                      | 6BW4          |
| Max. AC Volts per Plate (RMS), 450<br>Max. Peak Inverse Volts, 1275                             |  |                         |                                      |                             |                                     | Max. DC Output mA, 62.5<br>Max. Peak Plate mA per Plate, 350       |                              |  |                      |               |
| Total Effect. Supply Imped. per Plate, 82 ohms<br>Min. Value of Input Choke, 10 henries         |  |                         |                                      |                             |                                     |  |                              |  |                      |               |
| 250   | 68Ω                                    | 110                     | 3.5                                  | 10                          | 250000                              | 5200   | —                            | —  | —                    | 6BW8          |
| Max. DC Plate Volts, 500<br>Max. Plate Dissipation: 10 watts either plate; 12 watts both plates |  |                         |                                      |                             |                                     |  |                              | Max. DC Cathode mA, 180  |                      | 6BX7GT        |
| Max. DC Plate Volts, 500<br>Max. DC Cath. mA, 180   |  |                         |                                      |                             |                                     |  |                              | Max. Peak Positive-Pulse Plate Volts, 2000 (Abs.)<br>Max. Plate Dissipation: 10 watts either plate; 12 watts both plates |                      |               |
| Max. Peak Inverse Plate Volts, 3000 (Abs.)<br>Max. Peak Plate mA, 525<br>Max. DC Plate mA, 175  |  |                         |                                      |                             |                                     |  |                              | Max. Peak Heater-Cathode Volts: { -450<br>+100   |                      | 6BY5GA        |
| 170   | 82Ω                                    | 140                     | 3.9                                  | 74                          | 33000                               | 4900   | —                            | 2500   | 4                    |               |
| 150   | 180Ω                                   | 100                     | 3.4                                  | 2.8                         | 110000                              | 2500   | (grid no. 1 to plate)        |  | 6BY11                |               |
| 150   | 220Ω                                   | —                       | —                                    | 10                          | 5300                                | 6800   | 36                           | —  | —                    | 6BZ7          |
| 125   | 100Ω                                   | —                       | —                                    | 10                          | 5600                                | 8000   | 45                           | —  | —                    | 6BZ8          |
| 250   | — 8V                                   | —                       | —                                    | 8.0                         | 10000                               | 2000   | 20                           | —  | —                    | 6C5<br>6C5GT  |
| For other characteristics, refer to Type 6J7  |  |                         |                                      |                             |                                     |  |                              |  |                      |               |
| 250   | — 9V                                   | —                       | —                                    | 4.5                         | 16000                               | 1250   | 20                           | —  | —                    | 6C6           |
| 250   | — 4.5V                                 | —                       | —                                    | 3.2                         | 22500                               | 1600   | 36                           | —  | —                    | 6C7           |
| 250   | — 2V                                   | —                       | —                                    | 1.2                         | 62500                               | 1600   | 100                          | —  | —                    | 6C8G          |
| 100   | — 1V                                   | —                       | —                                    | 0.5                         | 80000                               | 1250   | 100                          | —  | —                    | 6C10          |
| 265   | — 13.5V                                | 250                     | 15                                   | 100                         | 15000                               | 11000  | —                            | 2000   | 11                   | 6CA7          |
| 450   | 232Ω                                   | 450                     | 20                                   | 120                         | —                                   | —  | —                            | 6500   | 40                   |               |
| Max. DC Plate Volts, 700<br>Max. DC Cathode mA, 200   |  |                         |                                      |                             |                                     |  |                              | Max. Peak Positive-Pulse Plate Volts, 6800 (Abs.)<br>Max. Plate Dissipation, 23 Watts                                    |                      | 6CB5          |
| 125   | 56Ω                                    | 125                     | 3.7                                  | 13                          | 280000                              | 8000   | —                            | —  | —                    |               |
| Max. DC Plate Volts, 700<br>Max. DC Cathode mA, 200   |  |                         |                                      |                             |                                     |  |                              | Max. Peak Positive-Pulse Plate Volts, 7000<br>Max. Plate Dissipation, 20 watts   |                      | 6CD6G         |
| For other characteristics, refer to Type 6CE3/6CD3/6DT3   |  |                         |                                      |                             |                                     |  |                              |  |                      |               |
| 125   | — 1V                                   | 125                     | 2.3                                  | 11                          | 300000                              | 7600   | —                            | —  | —                    | 6CE3          |
| 125   | 56Ω                                    | 125                     | 3.7                                  | 12.5                        | 300000                              | 7800   | —                            | —  | —                    | 6CE5          |
| Max. Peak Inverse Plate Volts, 5000<br>Max. Peak Plate mA, 2100                                 |  |                         |                                      |                             |                                     |  |                              | Max. Peak Heater Cathode Volts: { +300<br>-5000  |                      | 6CG3/<br>6CD3 |
| 100   | — 1V                                   | —                       | —                                    | 12                          | 6000                                | 6500   | 40                           | —  | —                    |               |
| 250   | — 1V                                   | 125                     | 2.2                                  | 9                           | 300000                              | 5500   | —                            | —  | —                    | 6CG8          |
| 200   | — 6V                                   | —                       | —                                    | 13                          | 5750                                | 3300   | 19                           | —  | —                    | 6CH8          |
| 200   | 180Ω                                   | 150                     | 2.8                                  | 9.5                         | 300000                              | 6200   | —                            | —  | —                    |               |
| Max. Peak Inverse Plate Volts, 5200<br>Max. Peak Plate mA, 1200<br>Max. DC Plate mA, 250        |  |                         |                                      |                             |                                     |  |                              | Max. Peak Heater-Cathode Volts { -5200**<br>+300<br>** DC component must not exceed 900 volts                            |                      | 6CK3          |
| Max. DC Plate Volts, 550<br>Max. Peak Cathode mA, 350   |  |                         |                                      |                             |                                     |  |                              | Max. Peak Positive-Pulse Plate Volts, 2000 (Abs.)<br>Max. Plate Dissipation, 12 watts                                    |                      |               |
| 125   | — 1V                                   | —                       | —                                    | 14                          | 5000                                | 8000   | 40                           | —  | —                    | 6CK4          |
| 125   | — 1V                                   | 125                     | 4                                    | 12                          | 120000                              | 6000   | —                            | —  | —                    | 6CL8          |

| RCA<br>Type    | Name                                      | Out-<br>line | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |         | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|----------------|---|--------------|--------------------------|---------------------------|---------|--|
|                |   |              |                          | Volts                     | Amperes |  |
|                |   |              |                          |                           |         |  |
| 6CM6           | Beam Power Tube                           | 6E           | 9CK                      | 6.3                       | 0.45    | Class A Amplifier  |
| 6CM8           | High-Mu Triode—Sharp-Cutoff<br>Pentode    | 6B           | 9FZ                      | 6.3                       | 0.45    | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A<br>Amplifier   |
| 6CQ4           | Half-Wave Rectifier                       | 13G          | 4CG                      | 6.3                       | 1.6     | Television Damper Service  |
| 6CR6           | Diode-Remote-Cutoff Pentode               | 5C           | 7EA                      | 6.3                       | 0.3     | Pentode Unit as<br>Class A Amplifier   |
| 6CT3           | Half-Wave Rectifier                       | 6H           | 9RX                      | 6.3                       | 1.2     | Television Damper Service  |
| 6CU8           | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B           | 9GM                      | 6.3                       | 0.45    | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A<br>Amplifier   |
| 6CW5           | Power Pentode                             | 6G           | 9CV                      | 6.3                       | 0.76    | Vertical-Deflection Amplifier  |
| 6D4*           | Gas Triode                                | 5C           | 5AY                      | 6.3                       | 0.25    | Thyratron  |
| 6D6            | Remote-Cutoff Pentode                     | 24A          | 6F                       | 6.3                       | 0.3     | Amplifier Mixer  |
| 6D7            | Sharp-Cutoff Pentode                      | 24A          | 7H                       | 6.3                       | 0.3     | Amplifier Detector   |
| 6D8G           | Pentagrid Converter                       | 23           | 8A                       | 6.3                       | 0.15    | Converter  |
| 6D10           | High-Mu Triple Triode                     | 8A           | 12BQ                     | 6.3                       | 0.45    | Each Unit as Class A Amplifier   |
| 6DA4           | Half-Wave Rectifier                       | 13D          | 4CG                      | 6.3                       | 1.2     | Television Damper Service  |
| 6DB5           | Beam Power Tube                           | 6F           | 9GR                      | 6.3                       | 1.2     | Class A Amplifier  |
| 6DC8           | Twin Diode—Remote-Cutoff<br>Pentode       | 6E           | 9HE                      | 6.3                       | 0.3     | Class A Amplifier  |
| 6DC8/<br>EBF89 | Twin Diode—Semiremote<br>Cutoff Pentode   | 6E           | 9HE                      | 6.3                       | 0.3     | Pentode Unit as<br>Class A Amplifier   |
| 6DE4           | Half-Wave Vacuum Rectifier                | 13G          | 4CG                      | 6.3                       | 1.6     | Television Damper Service  |
| 6DL4/<br>EC88  | High-Mu Triode                            | 6M           | 9NY                      | 6.3                       | 0.165   | Class A Amplifier  |
| 6DL5/<br>EL95  | Power Pentode                             | 5E           | 7DQ                      | 6.3                       | 0.2     | Class A Amplifier  |
| 6DM4<br>6DM4A  | Half-Wave Rectifier                       | 13G          | 4CG                      | 6.3                       | 1.2     | Damper Service   |
| 6DN6           | Beam Power Tube                           | 21B          | 5BT                      | 6.3                       | 2.5     | Horizontal Deflection Amplifier  |
| 6DQ4           | Half-Wave Rectifier                       | 13F          | 4CG                      | 6.3                       | 1.2     | Damper Service   |
| 6DQ6A<br>6DQ6B | Beam Power Tube                           | 20           | 6AM                      | 6.3                       | 1.2     | Horizontal Deflection Amplifier  |
| 6DT6           | Sharp-Cutoff Pentode                      | 5C           | 7EN                      | 6.3                       | 0.3     | Class A Amplifier  |
| 6DW4           | Half-Wave Rectifier                       | 11D          | 9HP                      | 6.3                       | 1.2     | Television Damper Service  |
| 6DW4A          | Half-Wave Rectifier                       | 11D          | 9HP                      | 6.3                       | 1.2     | Television Damper Service  |
| 6DW5           | Beam Power Tube                           | 6G           | 9CK                      | 6.3                       | 1.2     | Vertical Deflection Amplifier  |
| 6DX8           | High-Mu Triode—<br>Sharp-Cutoff Pentode   | 6E           | 9HX                      | 6.3                       | 0.72    | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A<br>Amplifier   |

\* Industrial type

| Plate<br>Volts   | Grid Bias<br>or<br>Cathode<br>Resistor   | Screen<br>Grid<br>Volts           | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA                       | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduct-<br>ance<br>Micromhos  | Amplifi-<br>cation<br>Factor | Power                            |                      | RCA<br>Type    |
|--|--|-----------------------------------|--------------------------------------|---|-------------------------------------|--|------------------------------|----------------------------------|----------------------|----------------|
|  |  |                                   |                                      |   |                                     |  |                              | Load<br>Ohms                     | Out-<br>put<br>Watts |                |
| 250  | -12.5V                                   | —                                 | —                                    | 49.5  | 1960                                | 5000   | 9.8                          | (Triode Connected)               |                      | 6CM6           |
| 250  | -12.5V                                   | 250                               | 4.5                                  | 45  | 50000                               | 4100   | —                            | 5000                             | 8                    |                |
| 250  | -2V                                      | —                                 | —                                    | 1.8   | 50000                               | 2000   | 100                          | —                                | —                    | 6CM8           |
| 250  | 180Ω                                     | 150                               | 2.8                                  | 9.5   | 600000                              | 6200   | —                            | —                                | —                    |                |
| Max. Peak Inverse Plate Volts, 5500  |  | Max. DC Plate mA, 190             |                                      | Max. DC Plate Dissipation, 6.5 watts              |                                     | Max. Peak Heater Cathode Volts:  |                              | { +300<br>-5500                  |                      | 6CQ4           |
| Max. Peak Plate mA, 1200   |  | Max. Plate                        |                                      | Max. Plate  |                                     | Cathode  |                              | Volts:                           |                      |                |
| 250  | -2V                                      | 100                               | 2.6                                  | 9.6   | 800000                              | 2200   | —                            | —                                | —                    | 6CR6           |
| Max. Peak Inverse Plate Volts, 5000  |  | Max. Plate Dissipation, 6.5 Watts |                                      | Max. Peak Heater-Cathode Volts:                   |                                     | { -5000<br>+300  |                              |                                  |                      | 6CT3           |
| Max. Peak Plate mA, 1200   |  | Max. Plate                        |                                      | Max. Plate  |                                     | Cathode  |                              | Volts:                           |                      |                |
| 125  | -1                                       | —                                 | —                                    | 17  | 4100                                | 5800   | 24                           | —                                | —                    | 6CU8           |
| 125  | 56Ω                                      | 125                               | 3.8                                  | 12  | 170000                              | 7800   | —                            | —                                | —                    |                |
| Max. DC Plate Volts, 275   |  | Max. DC Cathode mA, 110           |                                      | Max. Peak Positive-Pulse Plate Volts, 2200        |                                     | Max. Plate Dissipation, 12 watts   |                              |                                  |                      | 6CW5           |
| Max. DC Cathode mA, 110  |  | Max. Plate                        |                                      | Max. Plate  |                                     | Dissipation,   |                              | watts                            |                      |                |
| 450  | Tube Voltage drop at<br>25 mA = 16 Volts |                                   | 25                                   | Peak Anode Current = 100 mA                       |                                     |  |                              |                                  |                      | 6D4♦           |
| For other characteristics, refer to Type 6U7G                                |  |                                   |                                      |   |                                     |  |                              |                                  |                      | 6D6            |
| For other characteristics, refer to Type 6J7                                 |  |                                   |                                      |   |                                     |  |                              |                                  |                      | 6D7            |
| 250  | -3V                                      | 100                               | 2.7                                  | 3.5   | 360000                              | Anode-Grid (2): 250 max. volts, 4 mA<br>Oscillator-Grid (1) Resistor. Conversion<br>Transcond., 550 micromhos. |                              |                                  |                      | 6D8G           |
| 125  | -1V                                      | —                                 | —                                    | 4.2   | 13600                               | 4200   | 57                           | —                                | —                    | 6D10           |
| Max. Peak Inverse Plate Volts, 4400  |  | Max. DC Plate mA, 155             |                                      | Max. DC Plate Dissipation, 5.5 watts              |                                     | Max. Peak Heater Cathode Volts:  |                              | { +300<br>-4400                  |                      | 6DA4           |
| Max. Peak Plate mA, 900  |  | Max. Plate                        |                                      | Max. Plate  |                                     | Cathode  |                              | Volts:                           |                      |                |
| 200  | 180Ω                                     | 125                               | 2.2                                  | 46  | 28000                               | 8000   | —                            | 4000                             | 3.8                  | 6DB5           |
| 250  | -2V                                      | 100                               | 2.7                                  | 9   | 1 M                                 | 3800   | —                            | —                                | —                    | 6DC8           |
| 200  | -1.5V                                    | 100                               | 3.3                                  | 11  | 600000                              | 4500   | —                            | —                                | —                    | 6DC8/<br>EBF89 |
| For other characteristics, refer to Type 6DE4/6CQ4                           |  |                                   |                                      |   |                                     |  |                              |                                  |                      | 6DE4           |
| 160  | 100Ω                                     | —                                 | —                                    | 12.5  | —                                   | 13500  | 65                           | —                                | —                    | 6DL4/<br>EC88  |
| 200  | 230Ω                                     | 200                               | 4.2                                  | 23  | —                                   | —  | —                            | 8000                             | 2.3                  | 6DL5/<br>EL95  |
| 250  | 320Ω                                     | 250                               | 4.5                                  | 24  | —                                   | —  | —                            | 10000                            | 3                    |                |
| Max. Peak Inverse Plate Volts, 5000  |  | Max. Peak Plate mA, 1100          |                                      | Max. DC Plate mA, 175                             |                                     | Max. DC Plate mA, 175  |                              |                                  |                      | 6DM4<br>6DM4A  |
| Max. Peak Heater-Cathode Volts, -5000 (DC Component Not to Exceed 900 Volts) |  | Max. Plate                        |                                      | Max. Plate  |                                     | Dissipation, 15 watts  |                              |                                  |                      |                |
| Max. Peak Heater-Cathode Volts, +300 (DC Component Not to Exceed 100 Volts)  |  | Max. DC Plate Volts, 700          |                                      | Max. DC Cathode mA, 200                           |                                     | Max. Peak Positive-Pulse Plate Volts, 6600 (Abs.)  |                              | Max. Plate Dissipation, 15 watts |                      | 6DN6           |
| Max. DC Plate Volts, 700   |  | Max. DC Cathode mA, 200           |                                      | Max. Peak Positive-Pulse Plate Volts, 6600 (Abs.) |                                     | Max. Plate Dissipation, 15 watts   |                              |                                  |                      | 6DQ4           |
| Max. DC Cathode mA, 200  |  | Max. Plate                        |                                      | Max. Plate  |                                     | Dissipation,   |                              | watts                            |                      |                |
| Max. Peak Inverse Plate Volts, 5500  |  | Max. DC Plate mA, 175             |                                      | Max. DC Plate mA, 175                             |                                     | Max. Plate Dissipation, 6 watts  |                              |                                  |                      | 6DQ6A<br>6DQ6B |
| Max. Peak Plate mA, 1000   |  | Max. Plate                        |                                      | Max. Plate  |                                     | Dissipation,   |                              | watts                            |                      |                |
| Max. DC Plate Volts, 770   |  | Max. DC Cathode mA, 155 (6DQ6A)   |                                      | Max. DC Cathode mA, 175 (6DQ6B)                   |                                     | Max. Peak Positive-Pulse Plate Volts, 6000 (Abs.)  |                              | Max. Plate Dissipation, 18 watts |                      | 6DQ6A<br>6DQ6B |
| 150  | 560Ω                                     | 100                               | 2.1                                  | 1.1   | 150000                              | 515  | —                            | —                                | —                    | 6DT6           |
| Max. Peak Inverse Plate Volts, 5000  |  | Max. Peak Plate mA, 1300          |                                      | Max. DC Plate mA, 250                             |                                     | Max. Plate Dissipation, 8.5  |                              | Max. Peak Heater-Cathode Volts:  |                      | 6DW4           |
| Max. Peak Plate mA, 1300   |  | Max. Plate                        |                                      | Max. Plate  |                                     | Dissipation,   |                              | watts                            |                      |                |
| Max. DC Plate mA, 250  |  | Max. Plate                        |                                      | Max. Plate  |                                     | Dissipation,   |                              | watts                            |                      | 6DW4A          |
| Max. Peak Inverse Plate Volts, 5500  |  | Max. Plate Dissipation, 8.5 Watts |                                      | Max. Peak Heater-Cathode Volts:                   |                                     | { -5500<br>+300  |                              |                                  |                      |                |
| Max. Peak Plate mA, 1300   |  | Max. Plate                        |                                      | Max. Plate  |                                     | Dissipation,   |                              | watts                            |                      | 6DW5           |
| Max. Average Plate mA, 250   |  | Max. Plate                        |                                      | Max. Plate  |                                     | Dissipation,   |                              | watts                            |                      |                |
| Max. DC Plate Volts, 330   |  | Max. DC Cathode mA, 65            |                                      | Max. Peak Positive-Pulse Plate Volts, 2200        |                                     | Max. Plate Dissipation, 11 watts   |                              |                                  |                      | 6DX8           |
| Max. DC Cathode mA, 65   |  | Max. Plate                        |                                      | Max. Plate  |                                     | Dissipation,   |                              | watts                            |                      |                |
| 200  | -1.7V                                    | —                                 | —                                    | 3   | —                                   | 4000   | 65                           | —                                | —                    | 6DX8           |
| 170  | -2.1V                                    | 170                               | 3                                    | 18  | 100000                              | 11000  | —                            | —                                | —                    |                |
| 200  | -2.9V                                    | 200                               | 3                                    | 18  | 130000                              | 10400  | —                            | —                                | —                    |                |
| 220  | -3.4V                                    | 220                               | 3                                    | 18  | 150000                              | 10000  | —                            | —                                | —                    |                |

| RCA Type             | Name                                   | Out-line        | Terminal Diagram | Heater or Filament (F) |         | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|----------------------|--|-----------------|------------------|------------------------|---------|--|
|                      |  |                 |                  | Volts                  | Amperes |  |
| 6DZ7                 | Twin Power Pentode                     | 19B             | 8JP              | 6.3                    | 1.52    | Class A Amplifier<br>Both Units as Push-Pull Class AB <sub>1</sub> Amplifier                   |
| 6E6                  | Twin Power Amplifier                   | 26              | 7B               | 6.3                    | 0.6     | Push-Pull Class A Amplifier  |
| 6E7                  | Remote-Cutoff Pentode                  | 24A             | 7H               | 6.3                    | 0.3     | Amplifier  |
| 6EA4                 | High-Mu Triode                         | 10D             | 12FA             | 6.3                    | 0.2     | Shunt Voltage Regulator  |
| 6EA5                 | Sharp-Cutoff Tetrode                   | 5C              | 7EW              | 6.3                    | 0.2     | Class A Amplifier  |
| 6EA7                 | Dual Triode                            | 13B             | 8BD              | 6.3                    | 1.05    | Vertical Deflection Oscillator<br>Vertical Deflection Amplifier                                |
| 6EC4A/<br>EY500      | Half-Wave Vacuum Rectifier             | 35C             | 6EC4             | 6.3                    | 2.1     | Television Damper Service  |
| 6EH4                 | Beam Triode                            | 16E             | 12FA             | 6.3                    | 0.2     | Shunt Regulator  |
| 6EH7                 | Semiremote-Cutoff Pentode              | 6C              | 9AQ              | 6.3                    | 0.3     | Class A Amplifier  |
| 6EH8                 | Medium-Mu Triode—Sharp-Cutoff Pentode  | 6B              | 9JG              | 6.3                    | 0.45    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| ★6EJ4A               | Beam Triode                            | 16G             | 12HC             | 6.3                    | 0.2     | Voltage Control  |
| 6EJ7                 | Sharp-Cutoff Pentode                   | 6C              | 9AQ              | 6.3                    | 0.3     | Class A Amplifier  |
| 6EL4<br>6EL4A        | Beam Triode                            | 21D             | 8MW              | 6.3                    | 0.2     | Shunt Voltage Regulator  |
| 6EM7                 | Dual Triode                            | 13A             | 8BD              | 6.3                    | 0.925   | Class A Amplifier  |
| 6EQ7                 | Diode—Remote-Cutoff Pentode            | 6E              | 9LQ              | 6.3                    | 0.3     | Pentode Unit as Class A Amplifier  |
| 6ES5                 | High-Mu Triode                         | 5C              | 7FP              | 6.3                    | 0.2     | Class A Amplifier  |
| 6ES8                 | Variable-Mu Twin Triode                | 6B              | 9AJ              | 6.3                    | 0.365   | Each Unit as Class A Amplifier<br>Cascode-Type Amplifier                                       |
| 6ET7                 | Twin Diode—Sharp-Cutoff Pentode        | 6E              | 9LT              | 6.3                    | 0.75    | Pentode Unit as Class A Amplifier  |
| 6EU8                 | Medium-Mu Triode—Sharp-Cutoff Pentode  | 6B              | 9JF              | 6.3                    | 0.45    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 6EV7                 | High-Mu Twin Triode                    | 6E              | 9LP              | 6.3                    | 0.6     | Relay Control  |
| 6EX6                 | Beam Power Tube                        | 21B             | 5BT              | 6.3                    | 2.25    | Horizontal Deflection Amplifier  |
| 6EY6                 | Beam Power Tube                        | 13F             | 7AC              | 6.3                    | 0.68    | Vertical Deflection Amplifier  |
| 6EZ5                 | Beam Power Tube                        | 13F             | 7AC              | 6.3                    | 0.8     | Vertical Deflection Amplifier  |
| 6EZ8                 | High-Mu Triple Triode                  | 6B              | 9KA              | 6.3                    | 0.45    | Each Unit as Class A Amplifier   |
| 6F4 †                | Triode                                 | acorn           | 7BR              | 6.3                    | 0.225   | AF, RF Amplifier and Oscillator  |
| 6F5<br>6F5GT         | High-Mu Triode                         | 3<br>14A        | 5M<br>5M         | 6.3                    | 0.3     | Class A Amplifier  |
| 6F6<br>6F6G<br>6F6GT | Power Pentode                          | 2B<br>25<br>13F | 7S<br>7S<br>7S   | 6.3                    | 0.7     | Pentode Class A Amplifier<br>Triode □ Class A Amplifier<br>Pentode Push-Pull Class A Amplifier |
| 6F7                  | Low-Mu Triode—Remote-Cutoff Pentode    | 24B             | 7E               | 6.3                    | 0.3     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 6F8G                 | Medium-Mu Twin Triode                  | 23              | 8G               | 6.3                    | 0.6     | Each Unit as Class A Amplifier   |
| 6FA7                 | Diode—Sharp-Cutoff, Twin-Plate Tetrode | 6E              | 9MR              | 6.3                    | 0.3     | Tetrode Unit as Class A Amplifier  |
| 6FE5                 | Beam Power Tube                        | 13G             | 8KB              | 6.3                    | 1.2     | Class A Amplifier  |

† Industrial type

★ See Safety Precautions at end of this section.



| Plate<br>Volts                                     | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA           | AC Plate<br>Resist-<br>ance<br>Ohms        | Trans-<br>conduct-<br>ance<br>Micromhos  | Amplifi-<br>cation<br>Factor            | Power        |                      | RCA<br>Type |
|--|--|-------------------------|--------------------------------------|---------------------------------------|--|--|---|--------------|----------------------|-------------|
|  |  |                         |                                      |                                       |  |  |   | Load<br>Ohms | Out-<br>put<br>Watts |             |
| 250  | — 7.3V                                 | 250                     | 5.5                                  | 48                                    | 38000                                      | 11300                                    | —                                       | —            | —                    |             |
| 400  | —11V                                   | 250                     | 13                                   | 100                                   | —  | —  | —                                       | 9000         | 18                   | 6DZ7        |
| 300  | 120Ω                                   | 250                     | 15                                   | 80                                    | —  | —  | —                                       | 9000         | 12                   |             |
| 250  | —27.5V                                 | —                       | —                                    | —                                     | —  | —  | —                                       | 14000        | 1.60†                | 6E6         |
| For other characteristics, refer to Type 6U7G      |  |                         |                                      |                                       |  |  |   |              |                      | 6E7         |
| Max. DC Plate Volts, 27000                         |  |                         |                                      | Max. Plate Dissipation, 30 watts      |  |  | 6EA4                                    |              |                      |             |
| Max. Unregulated DC Plate Supply Volts, 60000      |  |                         |                                      | Max. DC Plate mA, 1.6                 |  |  |   |              |                      |             |
| 250  | — 1V                                   | 140                     | 0.95                                 | 10                                    | 150000                                     | 8000                                     | —                                       | —            | —                    | 6EA5        |
| 250  | — 3                                    | —                       | —                                    | 2                                     | 30000                                      | 2200                                     | 66                                      | —            | —                    | 6EA7        |
| 175  | —25                                    | —                       | —                                    | 40                                    | 920  | 6000                                     | 5.5                                     | —            | —                    |             |
| Max. Peak Inverse Plate Volts, 5600                |  |                         |                                      | Max. Plate Dissipation, 11 watts      |  |  | 6EC4A/                                  |              |                      |             |
| Max. Peak Plate mA, 800                            |  |                         |                                      | Max. Peak Heater-Cathode Volts, —6300 |  |  | EY500                                   |              |                      |             |
| Max. DC Plate mA, 440                              |  |                         |                                      |                                       |  |  |   |              |                      |             |
| Max. Plate Volts, 27000                            |  |                         | Max. Peak Grid Volts, —440           |                                       |  | 6EH4                                     |   |              |                      |             |
| Max. DC Grid Volts, —135                           |  |                         | Max. DC Plate mA, 1.6                |                                       |  | Max. Plate Dissipation, 30 watts         |   |              |                      |             |
| 200  | — 2V                                   | 90                      | 4.5                                  | 12                                    | 500000                                     | 12500                                    | —                                       | —            | —                    | 6EH7        |
| 125  | — 1V                                   | —                       | —                                    | 13.5                                  | —  | 7500                                     | 40                                      | —            | —                    |             |
| 125  | — 1V                                   | 125                     | 4                                    | 12                                    | 170000                                     | 6000                                     | —                                       | —            | —                    | 6EH8        |
| Max. DC Plate Volts, 27000                         |  |                         | Max. DC Plate mA, 1.5                |                                       |  | 6EJ4A                                    |   |              |                      |             |
| Typical Unregulated DC Supply Volts, 36000         |  |                         | Max. Plate Dissipation, 40 watts     |                                       |  |  |   |              |                      |             |
| 200  | — 2.5V                                 | 200                     | 4.1                                  | 10                                    | 350000                                     | 15000                                    | —                                       | —            | —                    | 6EJ7        |
| For other characteristics, refer to Type 6LJ6      |  |                         |                                      |                                       |  |  |   |              |                      | 6EL4        |
|  |  |                         |                                      |                                       |  |  |   |              |                      | 6EL4A       |
| For other characteristics, refer to Type 6EM7/6EA7 |  |                         |                                      |                                       |  |  |   |              |                      | 6EM7        |
| 100  | 0                                      | 100                     | 3.5                                  | 9                                     | 250000                                     | 3800                                     | (R <sub>g</sub> = 2.2 megohms bypassed) |              | 6EQ7                 |             |
| 200  | —1                                     | —                       | —                                    | 10                                    | 8000                                       | 9000                                     | 75                                      | —            | —                    | 6ES5        |
| 90   | — 1.2V                                 | —                       | —                                    | 15                                    | 2500                                       | 12500                                    | —                                       | —            | —                    |             |
| 180  | —                                      | —                       | —                                    | 15                                    | —  | 12500                                    | —                                       | —            | —                    | 6ES8        |
| 200  | 100Ω                                   | 150                     | 5.5                                  | 25                                    | 60000                                      | 11500                                    | —                                       | —            | —                    | 6ET7        |
| 60   | 0V                                     | 150                     | 18                                   | 55                                    | (Instantaneous plate knee characteristics) |  |   |              |                      |             |
| 150  | 56Ω                                    | —                       | —                                    | 18                                    | 5000                                       | 8500                                     | —                                       | —            | —                    | 6EU8        |
| 125  | —1V                                    | 125                     | 4                                    | 12                                    | 80000                                      | 6400                                     | 40                                      | —            | —                    |             |
| 250  | 0V                                     | —                       | —                                    | 18.5                                  | Grid Volts for Plate μA 100 = —9           |  | 2500-ohm                                |              | 6EV7                 |             |
| 150  | 0V                                     | —                       | —                                    | 10.0                                  | Grid Volts for Plate μA 100 = —5           |  | relay                                   |              |                      |             |
| 175  | —30V                                   | 175                     | 3.3                                  | 67                                    | 8500                                       | 7700                                     | —                                       | —            | —                    | 6EX6        |
| 250  | —17.5V                                 | 250                     | 3                                    | 44                                    | 60000                                      | 4400                                     | —                                       | —            | —                    | 6EY6        |
| 250  | —20V                                   | 250                     | 3.5                                  | 43                                    | 50000                                      | 4100                                     | —                                       | —            | —                    | 6EZ5        |
| 125  | —1                                     | —                       | —                                    | 4.2                                   | 13600                                      | 4200                                     | 57                                      | —            | —                    | 6EZ8        |
| 80   | 150Ω                                   | —                       | —                                    | 13                                    | 2900                                       | 5800                                     | 17                                      | —            | —                    | 6F4†        |
| 100  | — 1V                                   | —                       | —                                    | 0.4                                   | 85000                                      | 1150                                     | 100                                     | —            | —                    | 6F5         |
| 250  | — 2V                                   | —                       | —                                    | 0.9                                   | 66000                                      | 1500                                     | 100                                     | —            | —                    | 6F5GT       |
| 250  | —16.5V                                 | 250                     | 6.5                                  | 34.0                                  | 80000                                      | 2500                                     | —                                       | 7000         | 3.2                  | 6F6         |
| 285  | —20V                                   | 285                     | 7.0                                  | 38.0                                  | 78000                                      | 2550                                     | —                                       | 7000         | 4.8                  |             |
| 250  | —20V                                   | —                       | —                                    | 31.0                                  | 2600                                       | 2600                                     | 6.8                                     | 4000         | 0.85                 | 6F6G        |
| 315  | —24V                                   | 285                     | 12.0□                                | 62.0□                                 | —  | —  | —                                       | 10000        | 11.0†                | 6F6GT       |
| 100  | — 3V                                   | —                       | —                                    | 3.5                                   | 16000                                      | 500                                      | 8                                       | —            | —                    | 6F7         |
| 250  | — 3V                                   | 100                     | 1.5                                  | 6.5                                   | 850000                                     | 1100                                     | —                                       | —            | —                    |             |
| For other characteristics, refer to Type 6J5       |  |                         |                                      |                                       |  |  |   |              |                      | 6F8G        |
| 100  | 0                                      | 100                     | 3                                    | 2.2                                   | 130000                                     | 1900(With 2.2 megohm No.1 grid resistor) |   |              | 6FA7                 |             |
| Use either plate with unused plate grounded        |  |                         |                                      |                                       |  |  |   |              |                      |             |
| 145  | —16V                                   | 145                     | 18                                   | 100                                   | 8000                                       | 9500                                     | —                                       | 1000         | 5.6                  | 6FE5        |

For two tubes at stated plate-to-plate load.

□ For two tubes.

| RCA Type      | Name                                      | Out-line | Terminal Dia-gram | Heater or Filament (F) |                         | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|---------------|---|----------|-------------------|------------------------|-------------------------|--|
|               |   |          |                   | Volts                  | Amperes                 |  |
|               |   |          |                   | 6FG6                   | Refer to type EM84/6FG6 |  |
| 6FJ7          | Medium-Mu Dual Triode                     | 8B       | 12BM              | 6.3                    | 0.9                     | Unit No. 1 as Class A Amplifier<br>Unit No. 2 as Class A Amplifier                             |
| 6FM8          | Twin Diode—<br>High-Mu Triode             | 6B       | 9KR               | 6.3                    | 0.45                    | Triode Unit as Class A Amplifier   |
| 6FQ5A         | High-Mu Triode                            | 5C       | 7FP               | 6.3                    | 0.18                    | Class A Amplifier  |
| 6FQ7          | Medium-Mu Twin Triode                     | 6E       | 9LP               | 6.3                    | 0.6                     | Each Unit as Class A Amplifier   |
| 6FV6          | Sharp-Cutoff Tetrode                      | 5C       | 7FQ               | 6.3                    | 0.2                     | Class A Amplifier  |
| 6FV8          | Medium-Mu Triode—Sharp-Cutoff<br>Pentode  | 6B       | 9FA               | 6.3                    | 0.45                    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                       |
| 6FV8A         | Medium-Mu Triode<br>Sharp-Cutoff Pentode  | 6B       | 9FA               | 6.3                    | 0.45                    | Triode Unit as Class A Amplifier<br>Pentode Unit<br>as Class A Amplifier                       |
| 6FW5          | Beam Power Tube                           | 19B      | 6CK               | 6.3                    | 1.2                     | Horizontal Deflection Amplifier  |
| 6FW8          | Medium-Mu Twin Triode                     | 6B       | 9AJ               | 6.3                    | 0.4                     | Each Unit as Class A Amplifier   |
| 6FY5/<br>EC97 | High-Mu Triode                            | 5C       | 7FP               | 6.3                    | 0.2                     | Class A Amplifier  |
| 6GG6          | Power Pentode                             | 22       | 7S                | 6.3                    | 0.15                    | Pentode Class A Amplifier  |
| 6G11          | Beam Power Tube—Sharp-Cutoff<br>Pentode   | 8B       | 12BU              | 6.3                    | 1.2                     | Beam Power Unit as Class A<br>Amplifier<br>Pentode Unit as Class A<br>Amplifier                |
| 6GB5          | Beam Power Tube                           | 10E      | 9NH               | 6.3                    | 1.38                    | Horizontal Deflection Amplifier  |
| 6GF5          | Beam Power Tube                           | 8D       | 12BJ              | 6.3                    | 1.2                     | Horizontal Deflection Amplifier  |
| 6GF7          | Dual Triode                               | 11A      | 9QD               | 6.3                    | 0.985                   | Vertical Deflection Oscillator<br>Vertical Deflection Amplifier                                |
| 6GH8          | Medium-Mu Triode—Sharp-Cutoff<br>Pentode  | 6B       | 9AE               | 6.3                    | 0.45                    | Triode Unit as Horiz. Defl. Osc.<br>Pentode Unit as<br>Horiz. Defl. Osc.                       |
| 6GJ5          | Novar Beam Power Tube                     | 18A      | 9QK               | 6.3                    | 1.2                     | Horizontal Deflection Amplifier  |
| 6GJ7          | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6J       | 9QA               | 6.3                    | 0.41                    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                       |
| 6GJ8          | Medium-Mu Triode—Sharp-Cutoff<br>Pentode  | 6B       | 9AE               | 6.3                    | 0.6                     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                       |
| 6GL7          | Dual-Triode                               | 13B      | 8BD               | 6.3                    | 1.05                    | Unit 1 as Class A Amplifier<br>Unit 2 as Class A Amplifier                                     |
| 6GM5          | Power Pentode                             | 10D      | 9MQ               | 6.3                    | 0.8                     | Class A Amplifier  |
| 6GQ7          | Triple Diode                              | 6B       | 9QM               | 6.3                    | 0.45                    | Each Unit as Half-Wave Rectifier   |
| 6GT5          | Beam Power Tube                           | 17B      | 9NZ               | 6.3                    | 1.2                     | Horizontal Deflection Amplifier  |
| 6GU5          | Beam Hexode                               | 5C       | 7GA               | 6.3                    | 0.22                    | Class A Amplifier  |
| 6GV8          | High-Mu Triode—<br>Power Pentode          | 6G       | 9LY               | 6.3                    | 0.9                     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                       |
| 6GW6          | Beam Power Tube                           | 20A      | 6AM               | 6.3                    | 1.2                     | Horizontal Deflection Amplifier  |
| 6GX6          | Sharp-Cutoff Pentode                      | 5C       | 7EN               | 6.3                    | 0.45                    | Class A Amplifier  |

| Plate<br>Volts | Grid Bias<br>or<br>Cathode<br>Resistor  | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA                         | AC Plate<br>Resist-<br>ance<br>Ohms   | Trans-<br>conduc-<br>tance<br>Micromhos | Amplifi-<br>cation<br>Factor                   | Power |             | RCA<br>Type   |      |
|----------------|---|-------------------------|--------------------------------------|---|---|---|--|-------|-------------|---------------|------|
|                |   |                         |                                      |   |   |   |  | Load  | Out-<br>put |               |      |
|                |   |                         |                                      |   |   |   |  | Ohms  | Watts       |               |      |
|                |   |                         |                                      |   |   |   |  |       |             | 6FG6          |      |
| 250            | -8  | —                       | —                                    | 8   | 8000  | 2500                                    | 22.5   | —     | —           | 6FJ7          |      |
| 250            | -9.5  | —                       | —                                    | 41  | 2000  | 7700                                    | 15.4   | —     | —           |               |      |
| 250            | -3  | —                       | —                                    | 1   | 58000   | 1200                                    | 70   | —     | —           | 6FM8          |      |
| 135            | -1.2  | —                       | —                                    | 8.9   | 6300  | 12000                                   | 74   | —     | —           | 6FQ5A         |      |
| 250            | -8V   | —                       | —                                    | 9   | 7700  | 2600                                    | 20   | —     | —           | 6FQ7          |      |
| 125            | -1  | 80                      | 1.5                                  | 10  | 100000  | 8000                                    | —  | —     | —           | 6FV6          |      |
| 125            | -1V   | —                       | —                                    | 14  | 5000  | 8000                                    | 40   | —     | —           | 6FV8          |      |
| 125            | -1V   | 125                     | 4                                    | 12  | 200000  | 6500                                    | —  | —     | —           |               |      |
| 125            | -1  | —                       | —                                    | 12  | 5600  | 8000                                    | 45   | —     | —           | 6FV8A         |      |
| 125            | -1  | 125                     | 4                                    | 12  | 20000   | 6500                                    | —  | —     | —           |               |      |
|                | Max. DC Plate Volts, 770<br>Max. DC Cathode mA, 610                                       |                         |                                      |   | Max. Peak Positive-Pulse Plate Volts, 6500<br>Max. Plate Dissipation, 18 watts  |   |  |       |             |               | 6FW5 |
| 100            | 1.2V  | —                       | —                                    | 15  | 2500  | 13000                                   | 33   | —     | —           | 6FW8          |      |
| 135            | -1V   | —                       | —                                    | 11  | —   | 13000                                   | 70   | —     | —           | 6FY5/<br>EC97 |      |
| 180            | -9V   | 180                     | 2.5                                  | 15.0  | 175000  | 2300                                    | —  | 10000 | 1.1         | 6GG6          |      |
| 120            | -8V   | 110                     | 4                                    | 49  | 10000   | 7500                                    | —  | 2500  | 2.3         | 6G11          |      |
| 150            | 150Ω  | 150                     | 3.5                                  | 15  | 20000   | 9500                                    | —  | —     | —           |               |      |
|                | Max. DC Plate Volts, 275<br>Max. DC Cathode mA, 275                                       |                         |                                      |   | Max. Peak Positive-Pulse Plate Volts, 7700<br>Max. Plate Dissipation, 17 watts  |   |  |       |             |               | 6GB5 |
|                | Max. DC Plate Volts, 770<br>Max. DC Cathode mA, 160                                       |                         |                                      |   | Max. Peak Positive-Pulse Plate Volts, 5000<br>Max. Plate Dissipation, 9 watts   |   |  |       |             |               | 6GF5 |
|                | Max. DC Plate Volts, 330<br>Max. DC Cathode mA, 22  |                         |                                      |   | Max. Plate Dissipation, 1.5 watts   |   |  |       |             |               | 6GF7 |
|                | Max. DC Plate Volts, 330<br>Max. DC Cathode mA, 50  |                         |                                      |   | Max. Peak Positive-Pulse, Plate Volts, 1500 (Abs.)<br>Max. Plate Dissipation, 11 watts                                  |   |  |       |             |               |      |
|                | Max. DC Plate Volts, 330  |                         |                                      |   | Max. Plate Dissipation, 2.5 watts   |   |  |       |             |               | 6GH8 |
|                | Max. DC Plate Volts, 350<br>Max. Peak Neg.-Pulse Grid Volts, 175                          |                         |                                      | Max. Peak Cathode mA, 300<br>Max. DC Cathode mA, 20 |   | Max. Plate<br>Dissipation, 2.5 watts    |  |       |             |               |      |
| 250            | -22.5V  | 150                     | 2.1                                  | 70  | 15000   | 7100                                    | —  | —     | —           | 6GJ5          |      |
| 100            | -3V   | —                       | —                                    | 15  | —   | 9000                                    | 20   | —     | —           | 6GJ7          |      |
| 170            | -1.2V   | 120                     | 3                                    | 10  | 350000  | 11000                                   | Ampl. Factor, 55<br>(Grid No. 2 to Grid No. 1) |       |             |               |      |
| 125            | -1V   | —                       | —                                    | 13.5  | 5000  | 8500                                    | 40   | —     | —           | 6GJ8          |      |
| 125            | -1V   | 125                     | 4.5                                  | 12  | 150000  | 7500                                    | —  | —     | —           |               |      |
| 250            | -3V   | —                       | —                                    | 2   | 30000   | 2200                                    | 66   | —     | —           | 6GL7          |      |
| 175            | -25V  | —                       | —                                    | 46  | 780   | 6400                                    | 5  | —     | —           |               |      |
| 300            | -10V  | 300                     | 8                                    | 60  | 29000   | 10200                                   | —  | 3000  | 11          | 6GM5          |      |
|                | Max. Peak Inverse Volts, 330<br>Max. RMS Plate Volts, 117<br>Max. Peak Plate mA, 54       |                         |                                      |   | Max. DC Average mA, 9<br>Min. Total Effective Plate<br>Supply Impedance, 300 ohms                                       |   |  |       |             |               | 6GQ7 |
|                | Max. DC Plate Volts, 770<br>Max. DC Cathode mA, 175<br>Max. Plate Dissipation, 17.5 watts |                         |                                      |   | Max. Peak Neg.-Pulse Grid-No. 1 Volts, -330<br>Max. Grid-No. 2 Volts, 220<br>Max. Peak Positive-Pulse Plate Volts, 6500 |   |  |       |             |               | 6GT5 |
| 135            | -0.4V   | —                       | —                                    | 9   | 67000   | 15000                                   | —  | —     | —           | 6GU5          |      |
| 100            | -0.8V   | —                       | —                                    | 5   | 7600  | 6500                                    | 50   | —     | —           | 6GV8          |      |
| 170            | -15   | 170                     | 2.7                                  | 41  | 25000   | 7500                                    | —  | —     | —           |               |      |
| 250            | -22.5V  | 150                     | 2.1                                  | 70  | 15000   | 7100                                    | —  | —     | —           | 6GW6          |      |
| 150            | 180Ω  | 100                     | 3                                    | 3.7   | 140000  | 3700                                    | (Grid No. 1 to plate)                          |       |             | 6GX6          |      |

| RCA Type  | Name                                      | Out-line       | Terminal Diagram | Heater or Filament (F) |              | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|---|---|----------------|------------------|------------------------|--------------|--|
|   |   |                |                  | Volts                  | Amperes      |  |
| 6GY8  | High-Mu Triple Triode                     | 6B             | 9MB              | 6.3                    | 0.45         | Unit No. 1 as Class A Amplifier<br>Units No. 2 and No. 3 as Class A Amplifier                  |
| 6GZ5  | Power Pentode                             | 5C             | 7CV              | 6.3                    | 0.38         | Class A Amplifier  |
| 6HG<br>6HG6T                                    | Twin Diode                                | 29B<br>13D     | 7Q<br>7Q         | 6.3                    | 0.3          | Voltage Doubler<br>Half-Wave Rectifier   |
| 6HB6<br>6HB6/<br>6HA6                           | Power Pentode                             | 6G             | 9NW              | 6.3                    | 0.76         | Vertical Deflection Amplifier  |
| 6HE5  | Beam Power Tube                           | 8D             | 12EY             | 6.3                    | 0.8          | Class A Amplifier  |
| 6HG5  | Beam Power Tube                           | 5D             | 7BZ              | 6.3                    | 0.45         | Class A Amplifier  |
| 6HG8  | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B             | 9MP              | 6.3                    | 0.34         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 6HJ5  | Beam Power Tube                           | 15C            | 12FL             | 6.3                    | 2.25         | Horizontal Deflection Amplifier  |
| 6HJ8  | Diode—Sharp-Cutoff Pentode                | 6B             | 9CY              | 6.3                    | 0.45         | Pentode Unit as Class A Amplifier  |
| 6HK5  | High-Mu Triode                            | 5C             | 7GM              | 6.3                    | 0.19         | Class A Amplifier  |
| 6HM6  | Sharp-Cutoff Pentode                      | 6B             | 9PM              | 6.3                    | 0.3          | Class A Amplifier  |
| 6HR5  | Beam Power Tube                           | 5D             | 7BZ              | 6.3                    | 0.45         | Vertical-Deflection Amplifier  |
| 6HR6  | Semiremote-Cutoff Pentode                 | 5C             | 7BK              | 6.3                    | 0.45         | Class A Amplifier  |
| 6HU6/<br>EM87                                   | Electron-Ray Tube                         | 6N             | 9GA              | 6.3                    | 0.3          | Tuning Indicator   |
| 6HUB/<br>ELL80                                  | Twin Pentode                              | 6G             | 9NJ              | 6.3                    | 0.55         | Power Amplifier  |
| 6HV5  | Beam Triode                               | 15E            | 12GY             | 6.3                    | 1.8          | Class A Amplifier  |
| 6HZ5/<br>6JD5                                   | Beam Triode                               | 15F            | 12GY             | 6.3                    | 2.4          | High Voltage Pulse Regulator   |
| 6HZ8  | High-Mu Triode—<br>Sharp-Cutoff Pentode   | 8E             | 9DX              | 6.3                    | 1.125        | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 6J4 <sup>♦</sup><br>6J4WA <sup>♦</sup>          | Triode                                    | 5C             | 7BQ              | 6.3                    | 0.4          | UHF Amplifier  |
| 6J5<br>6J5GT                                    | Medium-Mu Triode                          | 2A<br>13D      | 6Q<br>6Q         | 6.3                    | 0.3          | Class A Amplifier  |
| 6J6<br>6J6WA <sup>♦</sup><br>6J6WB <sup>♦</sup> | Medium-Mu Twin Triode                     | 5C             | 7BF              | 6.3<br>6.3             | 0.45<br>0.45 | Each Unit as Class A Amplifier<br>Push-Pull Class C Amplifier                                  |
| 6J7<br>6J7G<br>6J7GT                            | Sharp-Cutoff Pentode                      | 3<br>23<br>14A | 7R<br>7R<br>7R   | 6.3                    | 0.3          | Pentode Class A RF Amplifier   |
| 6J8G  | Triode-Heptode Converter                  | 23             | 8H               | 6.3                    | 0.3          | Triode Unit as Oscillator<br>Heptode Unit as Mixer   |
| 6J9   | High-Mu Triple Triode                     | 6B             | 10G              | 6.3                    | 0.45         | Each Unit as Class A Amplifier   |
| 6J10  | Pentode-Beam Power Tube                   | 8B             | 12BT             | 6.3                    | 0.95         | Pentode Units as Class A Amplifier   |
| 6J11  | Sharp-Cutoff Twin Pentode                 | 8A             | 12BW             | 6.3                    | 0.8          | Each Unit as Class A Amplifier   |

♦ Industrial type

| Plate<br>Volts   | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms             | Trans-<br>conduc-<br>tance<br>Micromhos | Amplifi-<br>cation<br>Factor            | Power          |                      | RCA<br>Type             |
|--|--|-------------------------|--------------------------------------|-----------------------------|---|---|---|----------------|----------------------|-------------------------|
|  |  |                         |                                      |                             |   |   |   | Load<br>Ohms   | Out-<br>put<br>Watts |                         |
| 125<br>125   | 220Ω<br>-1V                            | —<br>—                  | —<br>—                               | 4.5<br>4.5                  | 14000<br>14000                                  | 4500<br>4500                            | 63<br>63                                | —<br>—         | —<br>—               | 6GY8                    |
| 250<br>250   | 270Ω<br>270Ω<br>(bypassed)             | 250<br>250              | 2.7<br>2.7                           | 16<br>16                    | —<br>150000                                     | —<br>8400                               | —<br>—                                  | 15000<br>15000 | 1.8<br>1.1           | 6GZ5                    |
| Max. AC Supply Volts per Plate (RMS), 117<br>Min. Total Effect. Plate-Supply Imped. per Plate: half-wave, 30 ohms; full wave, 15 ohms<br>Max. DC Output mA, 8. min.<br>Max. AC Plate Volts (RMS), 150<br>Max. DC Output mA, 8 per Plate<br>Min. Total Effective Plate-Supply Impedance: up<br>to 117 volts, 15 ohms; at 150 volts, 40 ohms |  |                         |                                      |                             |   |   |   |                |                      | 6H6<br>6HG6T            |
| 250<br>250   | 33Ω<br>100Ω                            | 125<br>250              | 4.2<br>6.2                           | 40<br>40                    | 28000<br>24000                                  | 24000<br>20000                          | —<br>33                                 | —<br>—         | —<br>—               | 6HB6<br>6HB6/<br>6HA6   |
| 250<br>60  | -20V<br>0V                             | 250<br>250              | 3.5<br>20                            | 43<br>180                   | 50000   | 4100                                    | Instantaneous Plate Knee characteristic |                | —<br>—               | 6HE5                    |
| 250<br>180   | -12.5V<br>-8.5V                        | 250<br>180              | 4.5<br>3                             | 45<br>29                    | 52000<br>58000                                  | 4100<br>3700                            | —<br>—                                  | 5000<br>5500   | 4.5<br>2             | 6HG5                    |
| 100  | -3V                                    | —                       | —                                    | 14                          | —   | 5500                                    | 17                                      | —              | —                    | 6HG8                    |
| 170  | -1.2V                                  | 150                     | 3.3                                  | 10                          | 350000  | 12000                                   | —                                       | —              | —                    | 6HJ5                    |
| 135  | -22                                    | 135                     | 5.5                                  | 80                          | 5000  | 10000                                   | 4.2                                     | —              | —                    | 6HJ8                    |
| 125  | 56Ω                                    | 125                     | 3.6                                  | 11.5                        | 200000  | 9300                                    | —                                       | —              | —                    | 6HK5                    |
| 135  | -1V                                    | —                       | —                                    | 12.5                        | 5000  | 15000                                   | 75                                      | —              | —                    | 6HM6                    |
| 125  | 56Ω                                    | 125                     | 3.2                                  | 13                          | 156000  | 15000                                   | —                                       | —              | —                    | 6HR5                    |
| 260<br>50  | -19V<br>0V                             | 270<br>250              | 2.3<br>2.5                           | 30<br>105                   | —   | 3600                                    | —                                       | —              | —                    | 6HR6                    |
| 200  | 68Ω                                    | 115                     | 4.3                                  | 13.2                        | 500000  | 8500                                    | —                                       | —              | —                    | 6HUG/<br>EM87           |
| Triode Plate and Fluorescent-Target Volts = 250<br>Triode Grid-Supply Volts = -10 to +15<br>Shadow Section = 0 to 0.83 inch  |  |                         |                                      |                             |   |   |   |                |                      | 6HUG/<br>ELL80          |
| 250  | 160Ω                                   | 250                     | 4.5                                  | 24                          | 80000   | 6000                                    | —                                       | 10000          | 3                    | 6HV5<br>6HZ5/<br>6JD5   |
| For other characteristics, refer to Type 6HS5  |  |                         |                                      |                             |   |   |   |                |                      |                         |
| 200  | —                                      | —                       | —                                    | 3.5                         | —   | 4000                                    | 70                                      | —              | —                    | 6J4*<br>6J4WA*          |
| 250  | 100                                    | 170                     | 6                                    | 29                          | 140000  | 12600                                   | —                                       | —              | —                    | 6J5<br>6J5GT            |
| 150  | 100Ω                                   | —                       | —                                    | 15                          | 4500  | 12000                                   | 55                                      | —              | —                    | 6J6<br>6J6WA*<br>6J6WB* |
| 90<br>250  | 0V<br>-8V                              | —<br>—                  | —<br>—                               | 10<br>9                     | 6700<br>7700                                    | 3000<br>2600                            | 20<br>20                                | —<br>—         | —<br>—               | 6J7<br>6J7G<br>6J7GT    |
| 100  | 50Ω (For both units)                   |                         |                                      | 8.5                         | 7100  | 5300                                    | 38                                      | —              | —                    | 6J8                     |
| 150  | -10V                                   | —                       | —                                    | 30                          | Grid Current, 16 mA<br>Driving Power, 0.35 watt |   | —                                       | —              | 3.5                  | 6J9                     |
| 100<br>250   | -3V<br>-3V                             | 100<br>100              | 0.5<br>0.5                           | 2.0<br>2.0                  | 1 M<br>1 M                                      | 1185<br>1225                            | —<br>—                                  | —<br>—         | —<br>—               | 6J10<br>6J11            |
| 100<br>250   | Triode-Grid Resistor,<br>50000 ohms    |                         |                                      | 4<br>5                      | —<br>—  | —<br>—                                  | —<br>—                                  | —<br>—         | —<br>—               | 6J8G                    |
| 250  | -3V                                    | 100                     | 2.8                                  | 1.4                         | 1.5 M   | Conversion Transcond., 290 micromhos    |   | —              | —                    | 6J9                     |
| 125  | -1V                                    | —                       | —                                    | 6                           | 11000   | 5200                                    | 57                                      | —              | —                    | 6J10                    |
| 250  | -8V                                    | 250                     | 2.5                                  | 35                          | 100000  | 6500                                    | —                                       | 5000           | 4.2                  | 6J11                    |
| 125  | 56Ω                                    | 125                     | 3.8                                  | 11                          | 200000  | 13000                                   | —                                       | —              | —                    | 6J11                    |

| RCA Type              | Name                                     | Out-line       | Terminal Diagram | Heater or Filament (F) |         | Use<br>Values to right give operating conditions and characteristics for indicated typical use            |
|-----------------------|--|----------------|------------------|------------------------|---------|---|
|                       |  |                |                  | Volts                  | Amperes |   |
|                       |  |                |                  |                        |         |   |
| 6J86                  | Beam Power Tube                          | 18A            | 9QL              | 6.3                    | 1.2     | Horizontal Deflection Amplifier   |
| 6JG6                  | Sharp-Cutoff Pentode                     | 6B             | 9PM              | 6.3                    | 0.3     | Class A Amplifier   |
| 6JE6                  | Beam Power Tube                          | 18B            | 9QL              | 6.3                    | 2.5     | Horizontal Deflection Amplifier   |
| 6JE6A                 | Beam Power Tube                          | 32B            | 9QL              | 6.3                    | 2.5     | Horizontal Deflection Amplifier   |
| 6JE8                  | High-Mu Triode<br>Sharp-Cutoff Pentode   | 6E             | 9DX              | 6.3                    | 0.78    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                                     |
| 6JG6                  | Beam Power Tube                          | 17B            | 9QU              | 6.3                    | 1.6     | Horizontal Deflection Amplifier   |
| 6JK6                  | Sharp-Cutoff Pentode                     | 5C             | 7CM              | 6.3                    | 0.35    | Class A Amplifier   |
| 6JK8                  | Dual Triode                              | 6B             | 9AJ              | 6.3                    | 0.4     | Unit No. 1 as Oscillator<br>Unit No. 2 as RF Amplifier  |
| 6JM6                  | Beam Power Tube                          | 16A            | 12FJ             | 6.3                    | 1.2     | Horizontal Deflection Amplifier   |
| 6JS6                  | Beam Power Tube                          | 16B            | 12FY             | 6.3                    | 2.25    | Horizontal Deflection Amplifier   |
| 6JSGA                 | Beam Power Tube                          | 16B            | 12FY             | 6.3                    | 2.25    | Horizontal Deflection Amplifier   |
| 6JT6                  | Beam Power Tube                          | 17C            | 9QU              | 6.3                    | 1.2     | Horizontal Deflection Amplifier   |
| 6JU8                  | Quadruple Diode                          | 6E             | 9PQ              | 6.3                    | 0.6     | Phase Detector  |
| 6JZ6                  | Beam Power Tube                          | 16A            | 12GD             | 6.3                    | 1.5     | Horizontal Deflection Amplifier   |
| 6K5GT                 | High-Mu Triode                           | 14A            | 5U               | 6.3                    | 0.3     | Class A Amplifier   |
| 6K7<br>6K7G<br>6K7GT  | Remote-Cutoff Pentode                    | 3<br>23<br>14A | 7R<br>7R<br>7R   | 6.3                    | 0.3     | Class A Amplifier   |
| 6K8<br>6K8G<br>6K8GT  | Triode-Hexode Converter                  | 3<br>23<br>—   | 8K<br>8K<br>8K   | 6.3                    | 0.3     | Triode Unit as Oscillator<br>Hexode Unit as Mixer   |
| 6K11<br>6K11/<br>6Q11 | Twin High-Mu Triode—<br>Medium-Mu Triode | 8A             | 12BY             | 6.3                    | 0.6     | Twin Unit as Class A Amplifier<br>Class A Amplifier   |
| 6KL8                  | Diode—Sharp-Cutoff Pentode               | 6E             | 9LQ              | 6.3                    | 0.3     | Pentode Unit as Class A Amplifier   |
| 6KN8/<br>6RHH8        | Medium-Mu Twin Triode                    | 6B             | 9AJ              | 6.3                    | 0.4     | Each Triode as Class A Amplifier  |
| 6KU8                  | Twin Diode—<br>Sharp-Cutoff Pentode      | 10A            | 9LT              | 6.3                    | 0.725   | Pentode Unit as Class A Amplifier   |
| 6KV6                  | Beam Power Tube                          | 31D            | 9QU              | 6.3                    | 1.6     | High-Voltage-Pulse Shunt Regulator  |
| 6KY6                  | Sharp-Cutoff Pentode                     | 6E             | 9GK              | 6.3                    | 0.52    | Class A Amplifier   |
| 6KY8                  | High-Mu Triode<br>Beam Power Tube        | 11C            | 9QT              | 6.3                    | 1.1     | Triode Unit as Oscillator<br>Beam Power Unit as Amplifier   |
| 6L5G                  | Medium-Mu Triode                         | 22             | 6Q               | 6.3                    | 0.15    | Class A Amplifier   |
| 6L6G<br>6L6GB         | Beam Power Tube                          | 27B<br>19D     | 7AC<br>7AC       | 6.3                    | 0.9     | Single-Tube Class A Amplifier<br>Push-Pull Class A Amplifier<br>Push-Pull Class AB <sub>1</sub> Amplifier |
| 6L7<br>6L7G           | Pentagrid Mixer                          | 3<br>23        | 7T<br>7T         | 6.3                    | 0.3     | Mixer Service   |

| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms  | Trans-<br>cond-<br>uctance<br>Micromhos  | Amplifi-<br>cation<br>Factor                          | Power        |                      | RCA<br>Type          |
|---|--|-------------------------|--------------------------------------|-----------------------------|--|--|---|--------------|----------------------|----------------------|
|   |  |                         |                                      |                             |  |  |   | Load<br>Ohms | Out-<br>put<br>Watts |                      |
| Max. DC Plate Volts, 770<br>Max. Peak Cathode mA, 550<br>Max. Plate Dissipation, 17.5 watts |  |                         |                                      |                             |  | Max. Peak Neg.-Pulse Grid-No. 1 Volts, — 330<br>Max. Grid-No. 2 Volts, 220<br>Max. Peak Positive-Pulse Plate Volts, 6500 |   |              |                      | 6JB6                 |
| 125   | 56Ω                                    | 125                     | 3.2                                  | 13                          | 0.18   | 15000  | —   | —            | —                    | 6JC6                 |
| For other characteristics, refer to Type 6JE6A  |  |                         |                                      |                             |  |  |   |              |                      | 6JE6                 |
| 175   | —25                                    | 125                     | 2.8                                  | 130                         | 5800   | 9600   | 3   | —            | —                    | 6JEA                 |
| 200   | —2V                                    | —                       | —                                    | 4.5                         | —  | 4200   | 70  | —            | —                    |                      |
| 250   | 82Ω                                    | 170                     | 4                                    | 22                          | 140000   | 12000  | —   | —            | —                    | 6JE8                 |
| 60  | 0V                                     | 170                     | 12                                   | 48                          | Instantaneous Plate Knee characteristic  |  |   |              |                      |                      |
| For other characteristics, refer to Type 6JGA   |  |                         |                                      |                             |  |  |   |              |                      | 6JG6                 |
| 125   | 68Ω                                    | 125                     | 3.9                                  | 11.5                        | 150000   | 18000  | —   | —            | —                    | 6JK6                 |
| 100   | —1V                                    | —                       | —                                    | 5.3                         | 8000   | 6800   | 55  | —            | —                    | 6JK8                 |
| 135   | —1.2V                                  | —                       | —                                    | 10                          | 5400   | 13000  | 70  | —            | —                    |                      |
| For other ratings, refer to Type 6JB6   |  |                         |                                      |                             |  |  |   |              |                      | 6JM6                 |
| 175   | —25V                                   | 125                     | 4.5                                  | 125                         | 5600   | 11300  | 3   | —            | —                    | 6JS6                 |
| 175   | —25                                    | 125                     | 4.5                                  | 125                         | 5600   | 11300  | 3   | —            | —                    | 6JS6A                |
| For other ratings, refer to Type 6JB6   |  |                         |                                      |                             |  |  |   |              |                      | 6JT6                 |
| Max. Peak Inverse Plate Volts, 300<br>Max. Peak Plate mA, 54                                |  |                         |                                      |                             |  | Max. DC Output mA, 9<br>Max. Peak Heater-Cathode Volts, ± 300  |   |              |                      | 6JU8                 |
| 130   | —20V                                   | 130                     | 1.8                                  | 46                          | 9900   | 9000   | —   | —            | —                    | 6JZ6                 |
| 50  | 0V                                     | 130                     | 29                                   | 450                         | Instantaneous Plate Knee characteristic  |  |   |              |                      |                      |
| 250   | — 3V                                   | —                       | —                                    | 1.1                         | 50000  | 1400   | 70  | —            | —                    | 6K5GT                |
| 250   | — 3V                                   | 125                     | 2.6                                  | 10.5                        | 600000   | 1650   | —   | —            | —                    | 6K7<br>6K7G<br>6K7GT |
| 100   | Grid Res., 50000 ohms                  |                         |                                      | 3.8                         | Triode-Grid & Hexode-Grid Current, 0.15 mA   |  |   |              |                      | 6K8                  |
| 100   | — 3V                                   | 100                     | 6.2                                  | 2.3                         | 400000   | Conversion Transcond., 325 micromhos   |   |              |                      | 6K8G                 |
| 250   | — 3V                                   | 100                     | 6.0                                  | 2.5                         | 600000   | Conversion Transcond., 350 micromhos   |   |              |                      | 6K8GT                |
| 250   | — 2V                                   | —                       | —                                    | 1.2                         | 62500  | 1600   | 100   | —            | —                    | 6K11                 |
| 250   | — 8.5V                                 | —                       | —                                    | 10.5                        | 7700   | 2200   | 17  | —            | —                    | 6K11/<br>6Q11        |
| 100   | 0                                      | 100                     | 2.2                                  | 5.5                         | 555000   | 4300   | Grid-No. 1 Volts for plate cur-<br>rent of 10 μA, 4.2 |              | —                    | 6KL8                 |
| 110   | —1V                                    | —                       | —                                    | 16                          | 2800   | 16000  | 45  | —            | —                    | 6KN8/<br>6RHH8       |
| For other characteristics, refer to Type 10KU8  |  |                         |                                      |                             |  |  |   |              |                      | 6KU8                 |
| For other characteristics, refer to Type 6KV6A  |  |                         |                                      |                             |  |  |   |              |                      | 6KV6                 |
| 200   | —18V                                   | 135                     | 5.2                                  | 30                          | 40000  | 30000  | —   | —            | —                    | 6KY6                 |
| Max. DC Plate Volts, 330<br>Max. DC Cathode mA, 22  |  |                         |                                      |                             |  | Max. Plate Dissipation, 1.5 watts  |   |              |                      |                      |
| Max. DC Plate Volts, 300<br>Max. DC Cathode mA, 60  |  |                         |                                      |                             |  | Max. Peak Positive-Pulse Plate Volts, 2200 (Abs.)<br>Max. Plate Dissipation, 12 watts                                    |   |              |                      | 6KY8                 |
| 250   | — 9V                                   | —                       | —                                    | 8.0                         | 9000   | 1900   | 17  | —            | —                    | 6L5G                 |
| 250   | —14V                                   | 250                     | 5.0                                  | 72.0                        | —  | —  | —   | 2500         | 6.5                  |                      |
| 250   | 168Ω                                   | 250                     | 5.4                                  | 75.0                        | —  | —  | —   | 2500         | 6.5                  |                      |
| 270   | —17.5V                                 | 270                     | 11.0□                                | 134.0□                      | —  | —  | —   | 5000         | 17.5†                | 6L6G                 |
| 270   | 124Ω□                                  | 270                     | 11.0□                                | 134.0□                      | —  | —  | —   | 5000         | 18.5†                | 6L6BG                |
| 360   | —22.5V                                 | 270                     | 5.0□                                 | 88.0□                       | —  | —  | —   | 6600         | 26.5†                |                      |
| 360   | 248Ω□                                  | 270                     | 5.0□                                 | 88.0□                       | —  | —  | —   | 9000         | 24.5†                |                      |
| 250   | — 6V                                   | 150                     | 9.2                                  | 2.3                         | Oscillator-Grid (No. 3) Bias, —15 volts<br>Grid-No. 3 Peak Swing, 16 volts minimum<br>Conversion Transcond., 350 micromhos |  |   |              | —                    | 6L7<br>6L7G          |

† For two tubes at stated plate-to-plate load.

□ For two tubes.

| RCA<br>Type          | Name                                     | Out-<br>line   | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |            | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|----------------------|--|----------------|--------------------------|---------------------------|------------|--|
|                      |  |                |                          | Volts                     | Amperes    |  |
|                      |  |                |                          |                           |            |  |
| 6LB8                 | Medium-Mu Triode<br>Sharp-Cutoff Pentode | 10A            | 9DX                      | 6.3                       | 0.725      | Triode Unit as Class A Amplifier   |
|                      |  |                |                          |                           |            | Pentode Unit as Class A Amplifier  |
| 6LH6A                | Beam Triode                              | 21D            | 8ML                      | 6.3                       | 0.2        | Shunt Voltage Regulator  |
| 6LJ6                 | Beam Triode                              | 21D            | 8MQ                      | 6.3                       | 0.2        | Shunt Voltage Regulator  |
| 6LQ6/<br>6JE6B       | Beam Power Tube                          | 32C            | 9QL                      | 6.3                       | 2.5        | Horizontal Deflection Amplifier  |
| 6LZ6                 | Beam Power Tube                          | 18C            | 9QL                      | 6.3                       | 2.3        | Horizontal Deflection Amplifier  |
| 6MK8                 | Sharp-Cutoff Pentode                     | 6E             | 9FG                      | 6.3                       | 0.3        | Class A Amplifier  |
| 6N6G                 | Direct-Coupled Power Triode              | 25             | 7AU                      | 6.3                       | 0.8        | Class A Amplifier  |
| 6N7<br>6N7GT         | Medium-Mu Twin Power Triode              | 2B<br>13D      | 8B<br>8B                 | 6.3                       | 0.8        | Class A Amplifier (as Driver)  |
|                      |  |                |                          |                           |            | Class B Amplifier  |
| 6P5GT                | Medium-Mu Triode                         | 13D            | 6Q                       | 6.3                       | 0.3        | Amplifier Detector   |
| 6P7G                 | Low-Mu Triode—Remote-Cutoff<br>Pentode   | 23             | 7U                       | 6.3                       | 0.3        | Amplifier and Converter  |
| 6Q7<br>6Q7G<br>6Q7GT | Twin Diode High-Mu Triode                | 3<br>23<br>14A | 7V<br>7V<br>7V           | 6.3                       | 0.3        | Triode Unit as Class A Amplifier   |
| 6Q11                 | Twin High-Mu Triode—<br>Medium-Mu Triode | 8A             | 12BY                     | 6.3                       | 0.6        | Twin Unit as Class A Amplifier<br>Class A Amplifier  |
| 6R7<br>6R7G<br>6R7GT | Twin Diode—Medium-Mu Triode              | 3<br>23<br>14A | 7V<br>7V<br>7V           | 6.3                       | 0.3        | Triode Unit as Class A Amplifier   |
| 6RP22                | Power Pentode                            | 6E             | 9BV                      | 6.3                       | 0.65       | Class A Amplifier  |
| 6S4                  | Medium-Mu Triode                         | 8E             | 9AC                      | 6.3<br>6.3                | 0.6<br>0.6 | Vertical Deflection Amplifier  |
| 6S7<br>6S7G          | Remote-Cutoff Pentode                    | 3<br>23        | 7R<br>7R                 | 6.3                       | 0.15       | Class A Amplifier  |
| 6S8GT                | Triple Diode—High-Mu Triode              | 14C            | 8CB                      | 6.3                       | 0.3        | Triode Unit as Class A Amplifier   |
| 6SA7<br>6SA7GT       | Pentagrid Converter                      | 2A<br>13D      | 8R<br>8AD                | 6.3                       | 0.3        | Converter  |
| 6SB7Y                | Pentagrid Converter                      | 2A             | 8R                       | 6.3                       | 0.3        | Mixer  |
| 6SC7                 | High-Mu Twin Triode                      | 2A             | 8S                       | 6.3                       | 0.3        | Each Unit as Amplifier   |
| 6SF5<br>6SF5GT       | High-Mu Triode                           | 2A<br>13D      | 6AB<br>6AB               | 6.3                       | 0.3        | Class A Amplifier  |
| 6SF7                 | Diode—Remote-Cutoff Pentode              | 2A             | 7AZ                      | 6.3                       | 0.3        | Pentode Unit as Class A<br>Amplifier   |
| 6SG7                 | Semiremote-Cutoff Pentode                | 2A             | 8BK                      | 6.3                       | 0.3        | Class A Amplifier  |
| 6SH7                 | Sharp-Cutoff Pentode                     | 2A             | 8BK                      | 6.3                       | 0.3        | Class A Amplifier  |
| 6SJ7<br>6SJ7GT       | Sharp-Cutoff Pentode                     | 2A<br>13D      | 8N<br>8N                 | 6.3                       | 0.3        | Class A Amplifier  |
| 6SK7<br>6SK7GT       | Remote-Cutoff Pentode                    | 2A<br>13D      | 8N<br>8N                 | 6.3                       | 0.3        | Class A Amplifier  |
| 6SN7GT               | Medium-Mu Twin Triode                    | 13D            | 8BD                      | 6.3                       | 0.6        | Each Unit as Class A Amplifier   |
| 6SN7<br>GTA          |  | 13D            |                          | 6.3                       | 0.6        | Each Unit as Vertical Amplifier  |



| Plate<br>Volts   | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts                               | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA   | AC Plate<br>Resist-<br>ance<br>Ohms        | Trans-<br>conduct-<br>ance<br>Micromhos                                  | Amplifi-<br>cation<br>Factor | Power        |                      | RCA<br>Type          |
|--|--|---|--------------------------------------|---|--|--|------------------------------|--------------|----------------------|----------------------|
|  |  |   |                                      |   |  |  |                              | Load<br>Ohms | Out-<br>put<br>Watts |                      |
| 125  | 68Ω                                    | —   | —                                    | 13  | 6000                                       | 5000   | 30                           | —            | —                    | 6LB8                 |
| 200  | 82Ω                                    | 100   | 3.5                                  | 17  | 5000                                       | 20000  | —                            | —            | —                    |                      |
| 50   | 0V                                     | 100   | 18                                   | 55  | Instantaneous Plate Knee characteristic    |  |                              |              |                      |                      |
| For other characteristics, refer to Type 6LJ6                  |  |   |                                      |   |  |  |                              |              |                      | 6LH6A                |
| Max. Plate Volts, 27000  |  |   |                                      |   | Max. Average Plate mA, 1.6                 |  |                              |              |                      | 6LI6                 |
| Max. Unregulated Plate Supply Volts, 60000                     |  |   |                                      |   | Max. Plate Dissipation, 40 Watts           |  |                              |              |                      |                      |
| 175  | -35                                    | 145   | 2.4                                  | 95  | 7000                                       | 7500   | 2.8                          | —            | —                    | 6LQ6/<br>6JE6B       |
| For other characteristics, refer to Type 31LZ6                 |  |   |                                      |   |  |  |                              |              |                      | 6LZ6                 |
| For other characteristics, refer to Type 6MK8A                 |  |   |                                      |   |  |  |                              |              |                      | 6MK8                 |
| Output Triode: Plate Volts, 300; Plate mA, 45; Load, 7000 ohms |  |   |                                      |   |  |  |                              | 4.0          |                      | 6NG6                 |
| Triode: Plate Volts, 300; Grid Volts, 0; Input Plate mA, 8     |  |   |                                      |   |  |  |                              |              |                      |                      |
| 250  | -5V                                    | —   | —                                    | 6.0   | 11300                                      | 3100   | 35                           | 20000        | exceeds              | 6N7<br>6N7GT         |
| 300  | -6V                                    | —   | —                                    | 7.0   | 11000                                      | 3200   | 35                           | or more      | 0.4                  |                      |
| 300  | 0V                                     | Power Output for 1 tube at stated plate-to-plate load |                                      |   |  |  |                              | 8000         | 10.0                 |                      |
| 250  | -13.5                                  | —   | —                                    | 5.0   | 9500                                       | —  | 13.8                         | —            | —                    | 6P5GT                |
| For other characteristics, refer to Type 6F7                   |  |   |                                      |   |  |  |                              |              |                      | 6P7G                 |
| 100  | -1V                                    | —   | —                                    | 0.8   | 58000                                      | 1200   | 70                           | —            | —                    | 6Q7                  |
| 250  | -3V                                    | —   | —                                    | 1.1   | 58000                                      | 1200   | 70                           | —            | —                    | 6Q7G<br>6Q7GT        |
| 250  | -2V                                    | —   | —                                    | 1.2   | 62500                                      | 1600   | 100                          | —            | —                    | 6Q11                 |
| 150  | 0V                                     | —   | —                                    | 22  | 7000                                       | 2500   | 18                           | —            | —                    |                      |
| 250  | -9V                                    | —   | —                                    | 9.5   | 8500                                       | 1900   | 16                           | —            | —                    | 6R7<br>6R7G<br>6R7GT |
| 250  | -3V                                    | 150   | 8.5                                  | 22  | 55000                                      | 8500   | —                            | —            | —                    | 6RP22                |
| Max. DC Plate Volts, 550                                       |  |   |                                      |   | Max. Peak Positive-Pulse Plate Volts, 2200 |  |                              |              |                      | 6S4                  |
| Max. DC Cathode mA, 30   |  |   |                                      |   | Max. Plate Dissipation, 8.5 watts          |  |                              |              |                      |                      |
| 250  | -3V                                    | 100   | 2.0                                  | 8.5   | 1 M  | 1750   | —                            | —            | —                    | 6S7<br>6S7G          |
| 250  | -2V                                    | —   | —                                    | 0.9   | 91000                                      | 1100   | 100                          | —            | —                    | 6S8GT                |
| 250  | Self-<br>Excited                       | 100   | 8.5                                  | 3.5   | 1.0  | Grid-No. 1 Resistor, 20000 ohms.<br>Conversion Transcond., 450 micromhos |                              |              | —                    | 6SA7<br>6SA7GT       |
| 100  | -1V                                    | 100   | 10.2                                 | 3.6   | 500000                                     | Grid-No. 1 Resistor, 20000 ohms.<br>Conversion Transcond., 950 micromhos |                              |              | —                    | 6SB7Y                |
| 250  | -2V                                    | —   | —                                    | 2.0   | 53000                                      | 1325   | 70                           | —            | —                    | 6SC7                 |
| 250  | -2V                                    | —   | —                                    | 0.9   | 66000                                      | 1500   | 100                          | —            | —                    | 6SF5<br>6SF5GT       |
| 100  | -1V                                    | 100   | 3.4                                  | 12.0  | 200000                                     | 1975   | —                            | —            | —                    | 6SF7                 |
| 250  | -1V                                    | 100   | 3.3                                  | 12.4  | 700000                                     | 2050   | —                            | —            | —                    |                      |
| 100  | -1V                                    | 100   | 3.2                                  | 8.2   | 250000                                     | 4100   | —                            | —            | —                    | 6SG7                 |
| 250  | -2.5V                                  | 150   | 3.4                                  | 9.2   | 1 M  | 4000   | —                            | —            | —                    |                      |
| 100  | -1V                                    | 100   | 2.1                                  | 5.3   | 350000                                     | 4000   | —                            | —            | —                    | 6SH7                 |
| 250  | -1V                                    | 150   | 4.1                                  | 10.8  | 900000                                     | 4900   | —                            | —            | —                    |                      |
| 100  | -3V                                    | 100   | 0.9                                  | 2.9   | 700000                                     | 1575   | —                            | —            | —                    | 6SJ7                 |
| 250  | -3V                                    | 100   | 0.8                                  | 3.0   | 1 M  | 1650   | —                            | —            | —                    | 6SJ7GT               |
| 100  | -1V                                    | 100   | 4.0                                  | 13.0  | 120000                                     | 2350   | —                            | —            | —                    | 6SK7                 |
| 250  | -3V                                    | 100   | 2.6                                  | 9.2   | 800000                                     | 2000   | —                            | —            | —                    | 6SK7GT               |
| 100  | 0V                                     | —   | —                                    | 10.0  | 6700                                       | 3000   | 20                           | —            | —                    | 6SN7GT               |
| 250  | -8V                                    | —   | —                                    | 9.0   | 7700                                       | 2600   | 20                           | —            | —                    | 6SN7<br>GTA          |
| Max. DC Plate Volts, 450                                       |  |   |                                      | Max. Plate Dissipation: 5 watts either plate; 7.5 watts both plates |  |  |                              |              |                      |                      |
| Max. Peak Cathode mA, 70                                       |  |   |                                      | Max. Peak Positive Pulse Plate Volts, 1500                          |  |  |                              |              |                      |                      |

| RCA Type        | Name                                      | Out-line     | Terminal Diagram | Heater or Filament (F) |              | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|-----------------|---|--------------|------------------|------------------------|--------------|--|
|                 |   |              |                  | Volts                  | Amperes      |  |
| 6SQ7<br>6SQ7GT  | Twin-Diode—High-Mu Triode                 | 2A<br>13D    | 8Q<br>8Q         | 6.3                    | 0.3          | Triode Unit as Class A Amplifier   |
| 6SR7            | Twin Diode—Medium-Mu Triode               | 2A           | 8Q               | 6.3                    | 0.3          | Triode Unit as Class A Amplifier   |
| 6SS7            | Remote-Cutoff Pentode                     | 2A           | 8N               | 6.3                    | 0.15         | Class A Amplifier  |
| 6ST7            | Twin Diode—Medium-Mu Triode               | 2A           | 8Q               | 6.3                    | 0.15         | Triode Unit as Amplifier   |
| 6SZ7            | Twin Diode—High-Mu Triode                 | 2A           | 8Q               | 6.3                    | 0.15         | Triode Unit as Class A Amplifier   |
| 6T4             | Medium-Mu Triode                          | 5D           | 7DK              | 6.3                    | 0.225        | Oscillator in UHF TV Receivers<br>Class A Amplifier  |
| 6T7G            | Twin Diode—High-Mu Triode                 | 22           | 7V               | 6.3                    | 0.15         | Triode Unit as Class A Amplifier   |
| 6T8             | Triple Diode—High-Mu Triode               | 6B           | 9E               | 6.3<br>6.3             | 0.45<br>0.45 | Triode Unit as Class A Amplifier   |
| 6T9             | High-Mu Triode—<br>Power Pentode          | 8B           | 12FM             | 6.3                    | 0.93         | Triode Unit as<br>Class A Amplifier<br>Pentode Unit as<br>Class A Amplifier                    |
| 6U5             | Electron-Ray Tube                         | 13H          | 6R               | 6.3                    | 0.3          | Visual Indicator   |
| 6U7G            | Remote-Cutoff Pentode                     | 28J          | 7R               | 6.3                    | 0.3          | Class A Amplifier  |
| 6U8             | Medium-Mu Triode—Sharp-Cutoff<br>Pentode  | 6B           | 9AE              | 6.3                    | 0.45         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                       |
| 6U9/<br>ECF201  | Medium-Mu Triode<br>Sharp-Cutoff Pentode  | 6B           | 10K              | 6.3                    | 0.41         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 6V3A            | Half Wave Rectifier                       | 7B           | 9BD              | 6.3                    | 1.75         | Television Damper Service  |
| 6V6GT<br>6V6GTY | Beam Power Tube                           | 13D          | 7AC              | 6.3                    | 0.45         | Single-Tube Class A Amplifier<br>Push-Pull Class AB <sub>1</sub> Amplifier                     |
| 6V7G            | Twin Diode—Low-Mu Triode                  | 23           | 7V               | 6.3                    | 0.3          | Triode Unit as Amplifier   |
| 6W4GT           | Half-Wave Rectifier                       | 13D          | 4CG              | 6.3                    | 1.2          | Television Damper Service  |
| 6W7G            | Sharp-Cutoff Pentode                      | 23           | 7R               | 6.3                    | 0.15         | Class A Amplifier  |
| 6X4W♦           | Full-Wave Rectifier                       | 5D           | 5BS              | 6.3                    | 0.6          | With Capacitive-Input Filter<br>With Inductive-Input Filter                                    |
| 6X5             | Full-Wave Rectifier                       | 2B           | 6S               | 6.3                    | 0.6          | With Capacitive-Input Filter<br>With Inductive-Input Filter                                    |
| 6X8             | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B           | 9AK              | 6.3                    | 0.45         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                       |
| 6Y5             | Full-Wave Rectifier                       | 22 or<br>13H | 6J               | 6.3                    | 0.8          | With Capacitive-Input Filter   |
| 6Y7G            | High-Mu Twin Power Triode                 | 22           | 8B               | 6.3                    | 0.6          | Class B Amplifier  |
| 6Y9             | Dual Pentode                              | 6L           | 10L              | 6.3                    | 0.8          | Unit No. 1 as Class A Amplifier<br>Unit No. 2 as Class A Amplifier                             |
| 6Z4             | Refer to type 84/6Z4                      |              |                  |                        |              |  |
| 6Z5             | Full-Wave Rectifier                       | 22           | 6K               | 12.6<br>6.3            | 0.8<br>0.4   | With Capacitive-Input Filter   |
| 6Z7G            | High-Mu Twin Power Triode                 | 22           | 8B               | 6.3                    | 0.3          | Class B Amplifier  |
| 6Z10            | Power Pentode<br>Gated-Beam Discriminator | 8C           | 12BT             | 6.3                    | 0.95         | Class A Amplifier  |
| 6ZY5G           | Full-Wave Rectifier                       | 22           | 6S               | 6.3                    | 0.3          | With Capacitive-Input Filter   |

♦ Industrial type

| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts                                    | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA                      | AC Plate<br>Resist-<br>ance<br>Ohms  | Trans-<br>conduc-<br>tance<br>Micromhos                 | Amplifi-<br>cation<br>Factor | Power        |                      | RCA<br>Type    |       |
|---|--|--|--------------------------------------|--|--|---|------------------------------|--------------|----------------------|----------------|-------|
|   |  |  |                                      |  |  |   |                              | Load<br>Ohms | Out-<br>put<br>Watts |                |       |
| 100   | — 1V                                   | —  | —                                    | 0.5  | 110000   | 925   | 100                          | —            | —                    | 6SQ7           |       |
| 250   | — 2V                                   | —  | —                                    | 1.1  | 85000  | 1175  | 100                          | —            | —                    | 6SQ7GT         |       |
| 250   | — 9V                                   | —  | —                                    | 9.5  | 8500   | 1900  | 16                           | —            | —                    | 6SR7           |       |
| 250   | — 3V                                   | 100  | 2.0                                  | 9.0  | 1 M  | 1850  | —                            | —            | —                    | 6SS7           |       |
| For other characteristics, refer to Type 6SR7   |  |  |                                      |  |  |   |                              |              |                      |                |       |
| 100   | — 1V                                   | —  | —                                    | 0.8  | 54000  | 1300  | 70                           | —            | —                    | 6ST7           |       |
| 250   | — 3V                                   | —  | —                                    | 1.0  | 53000  | 1200  | 70                           | —            | —                    | 6SZ7           |       |
| Max. DC Plate Volts, 200<br>Max. DC Cathode mA, 30  |  |  |                                      |  | Max. Grid mA, 8<br>Max. Plate Dissipation, 3.5 watts                                 |   |                              |              |                      | 6T4            |       |
| 80  | 150Ω                                   | —  | —                                    | 18   | —  | 7000  | 13                           | —            | —                    | —              |       |
| 250   | — 3V                                   | —  | —                                    | 1.2  | 62000  | 1050  | 65                           | —            | —                    | —              |       |
| 300   | 4580Ω                                  | —  | —                                    | Grid Resistor, 0.5 MΩ                            |  |   | Gain per stage, 40           |              |                      | 6T7G           |       |
| 100   | — 1V                                   | —  | —                                    | 0.8  | 54000  | 1300  | 70                           | —            | —                    | 6T8            |       |
| 250   | — 3V                                   | —  | —                                    | 1.0  | 58000  | 1200  | 70                           | —            | —                    | —              |       |
| 250   | — 2V                                   | —  | —                                    | 1.5  | 45000  | 2100  | —                            | —            | —                    | 6T9            |       |
| 250   | — 8V                                   | 250  | 2.5                                  | 35   | 100000   | 6500  | —                            | 5000         | 4.2                  | —              |       |
| Plate & Target Supply, 250 volts. Triode Plate Resistor, 1.0 MΩ Target Current, 4.0 mA<br>Grid Bias, —22 volts; Shadow Angle, 0°. Bias, 0 volts; Angle, 90°; Plate Current, 0.24 mA |  |  |                                      |  |  |   |                              |              |                      |                |       |
| 250   | — 3V                                   | 100  | 2.0                                  | 8.2  | 800000   | 1600  | —                            | —            | —                    | 6U5            |       |
| 125   | — 1V                                   | —  | —                                    | 13.5   | —  | 7500  | 40                           | —            | —                    | 6U7G           |       |
| 125   | — 1V                                   | 110  | 3.5                                  | 9.5  | 200000   | 5000  | —                            | —            | —                    | 6U8            |       |
| 100   | — 2V                                   | —  | —                                    | 14   | —  | 5000  | 17                           | —            | —                    | 6U9/<br>ECF201 |       |
| 160   | — 1.4V                                 | 110  | 5                                    | 13   | —  | 12000   | —                            | —            | —                    | —              |       |
| Max. Peak Inverse Plate Volts, 6000 (Abs.)<br>Max. Peak Plate mA, 800   |  |  |                                      |  | Max. Average Plate mA, 135<br>Max. Peak Heater-Cathode Volts: { -6750 (Abs.)<br>+300 |   |                              |              |                      |                | 6V3A  |
| 250   | — 12.5V                                | 250  | 4.5                                  | 45.0   | 50000  | 4100  | —                            | 5000         | 4.5                  | 6V6GT          |       |
| 315   | — 13V                                  | 225  | 2.2                                  | 34.0   | 80000  | 3750  | —                            | 8500         | 5.5                  | —              |       |
| 250   | — 15V                                  | 250  | 5.0□                                 | 70.0□  | —  | —   | —                            | 10000        | 10.0†                | 6V6GTY         |       |
| 285   | — 19V                                  | 285  | 4.0□                                 | 70.0□  | —  | —   | —                            | 8000         | 14.0†                | —              |       |
| For other characteristics, refer to Type 85   |  |  |                                      |  |  |   |                              |              |                      |                |       |
| Max. Peak Inverse Plate Volts, 3850<br>Max. Peak Plate mA, 750<br>Max. Average Plate mA, 125  |  |  |                                      |  | Max. Plate Dissipation, 3.5 watts<br>Max. Peak Heater-Cathode Volts, —2300, +300     |   |                              |              |                      |                | 6W4GT |
| 250   | — 3V                                   | 100  | 0.5                                  | 2.0  | 1.5 M  | 1225  | —                            | —            | —                    | 6W7G           |       |
| For other characteristics, refer to Type 6X4  |  |  |                                      |  |  |   |                              |              |                      |                |       |
| Max. AC Volts per Plate (RMS), 325<br>Max. Peak Inverse Volts, 1250   |  |  |                                      | Max. DC Output mA, 70<br>Max. Peak Plate mA, 245 |  | Min. Total Effect. Supply<br>Imped. per Plate, 525 ohms |                              |              |                      |                | 6X5   |
| Max. AC Volts per Plate (RMS), 400<br>Max. Peak Inverse Volts, 1250   |  |  |                                      | Max. DC Output mA, 70<br>Max. Peak Plate mA, 245 |  | Min. Value of Input Choke,<br>10 henries                |                              |              |                      |                | —     |
| 125   | — 1V                                   | —  | —                                    | 12   | 6000   | 6500  | 40                           | —            | —                    | 6X8            |       |
| 125   | — 1V                                   | 125  | 2.2                                  | 9  | 300000   | 5500  | —                            | —            | —                    | —              |       |
| Max. AC Volts per Plate (RMS), 350<br>Max. DC Output mA, 50   |  |  |                                      |  |  |   |                              |              |                      |                |       |
| For other characteristics, refer to Type 79   |  |  |                                      |  |  |   |                              |              |                      |                |       |
| 170   | — 2.6                                  | 170  | 6.5                                  | 30   | —  | 21000   | 38                           | —            | —                    | 6Y5            |       |
| 150   | — 2.3                                  | 150  | 3                                    | 10   | —  | 8500  | 35                           | —            | —                    | 6Y7G           |       |
| Max. AC Volts per Plate (RMS), 230<br>Max. DC Output mA, 60   |  |  |                                      |  |  |   |                              |              |                      |                |       |
| 180   | 0V                                     | Power Output is for one tube at stated plate-to-plate load |                                      |  |  |   |                              | 12000        | 4.2                  | 6Z7G           |       |
| For other characteristics, refer to Type 6Z10/6J10  |  |  |                                      |  |  |   |                              |              |                      |                |       |
| Max. Peak Inverse Volts, 1250   |  |  |                                      | Max. DC Output mA, 40<br>Max. Peak Plate mA, 120 |  | Min. Total Effect. Supply<br>Imped. per Plate, 225 ohms |                              |              |                      |                | 6ZY5G |

† For two tubes at stated plate-to-plate load.

□ For two tubes.

| RCA<br>Type    | Name                                      | Out-<br>line | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |         | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|----------------|---|--------------|--------------------------|---------------------------|---------|--|
|                |   |              |                          | Volts                     | Amperes |  |
|                |   |              |                          |                           |         |  |
| 7A4            | Medium-Mu Triode                          | 12B          | 5AC                      | 6.3                       | 0.3     | Amplifier  |
| 7A5            | Beam Power Tube                           | 12C          | 6AA                      | 6.3                       | 0.75    | Class A Amplifier  |
| 7A6            | Twin Diode                                | 12B          | 7AJ                      | 6.3                       | 0.15    | Detector Rectifier   |
| 7A7            | Remote-Cutoff Pentode                     | 12B          | 8V                       | 6.3                       | 0.3     | Class A Amplifier  |
| 7A8            | Octode Converter                          | 12B          | 8U                       | 6.3                       | 0.15    | Converter  |
| 7AD7           | Power Pentode                             | 12C          | 8V                       | 6.3                       | 0.6     | Class A Amplifier  |
| 7AF7           | Medium-Mu Twin Triode                     | 12B          | 8AC                      | 6.3                       | 0.3     | Each Unit as Class A Amplifier   |
| 7AG7           | Sharp-Cutoff Pentode                      | 12B          | 8V                       | 6.3                       | 0.15    | Class A Amplifier  |
| 7AH7           | Sharp-Cutoff Pentode                      | 12B          | 8V                       | 6.3                       | 0.15    | Class A Amplifier  |
| 7B4            | High-Mu Triode                            | 12B          | 5AC                      | 6.3                       | 0.3     | Amplifier  |
| 7B5            | Power Pentode                             | 12C          | 6AE                      | 6.3                       | 0.4     | Class A Amplifier  |
| 7B6            | Twin Diode—High-Mu Triode                 | 12B          | 8W                       | 6.3                       | 0.3     | Triode Unit as Amplifier   |
| 7B7            | Remote-Cutoff Pentode                     | 12B          | 8V                       | 6.3                       | 0.15    | Class A Amplifier  |
| 7B8            | Pentagrid Converter                       | 12B          | 8X                       | 6.3                       | 0.3     | Converter  |
| 7C5            | Beam Power Tube                           | 12C          | 6AA                      | 6.3                       | 0.45    | Class A Amplifier  |
| 7C6            | Twin Diode—High-Mu Triode                 | 12B          | 8W                       | 6.3                       | 0.15    | Triode Unit as Class A Amplifier   |
| 7C7            | Sharp-Cutoff Pentode                      | 12B          | 8V                       | 6.3                       | 0.15    | Class A Amplifier  |
| 7DJ8/<br>PCC88 | Dual Triode                               | 6B           | 9DE                      | 7                         | 0.3     | Each Unit as<br>Class A Amplifier  |
| 7E6            | Twin Diode—Medium-Mu Triode               | 12B          | 8W                       | 6.3                       | 0.3     | Triode Unit as Amplifier   |
| 7E7            | Twin Diode—Remote-Cutoff<br>Pentode       | 12B          | 8AE                      | 6.3                       | 0.3     | Pentode Unit as Class A<br>Amplifier   |
| 7EY6           | Beam Power Tube                           | 13F          | 7AC                      | 7.2                       | 0.6     | Vertical Deflection Amplifier  |
| 7F7            | High-Mu Twin Triode                       | 12B          | 8AC                      | 6.3                       | 0.3     | Each Unit as Amplifier   |
| 7F8            | Medium-Mu Twin Triode                     | 12A          | 8BW                      | 6.3                       | 0.3     | Each Unit as Class A Amplifier   |
| 7G7            | Sharp-Cutoff Pentode                      | 12B          | 8V                       | 6.3                       | 0.45    | Class A Amplifier  |
| 7H7            | Semiremote-Cutoff Pentode                 | 12B          | 8V                       | 6.3                       | 0.3     | Class A Amplifier  |
| 7HG8           | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B           | 9MP                      | 7.2                       | 0.3     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier                                 |
| 7J7            | Triode-Heptode Converter                  | 12B          | 8BL                      | 6.3                       | 0.3     | Triode Unit as Oscillator<br>Heptode Unit as Mixer   |
| 7K7            | Twin Diode—High-Mu Triode                 | 12B          | 8BF                      | 6.3                       | 0.3     | Triode Unit as Class A Amplifier   |
| 7KZ6           | Sharp-Cutoff Pentode                      | 6E           | 96K                      | 7.3                       | 0.45    | Class A Amplifier  |
| 7L7            | Sharp-Cutoff Pentode                      | 12B          | 8V                       | 6.3                       | 0.3     | Class A Amplifier  |
| 7N7            | Medium-Mu Twin-Triode                     | 12C          | 8AC                      | 6.3                       | 0.6     | Each Unit as Class A Amplifier   |
| 7Q7            | Pentagrid Converter                       | 12B          | 8AL                      | 6.3                       | 0.3     | Converter  |
| 7R7            | Twin Diode—Remote-Cutoff<br>Pentode       | 12B          | 8AE                      | 6.3                       | 0.3     | Pentode Unit as Class A<br>Amplifier   |
| 7S7            | Triode-Heptode Converter                  | 12B          | 8BL                      | 6.3                       | 0.3     | Triode Unit as Oscillator<br>Heptode Unit as Mixer   |
| 7V7            | Sharp-Cutoff Pentode                      | 12B          | 8V                       | 6.3                       | 0.45    | Class A Amplifier  |
| 7W7            | Sharp-Cutoff Pentode                      | 12B          | 8BJ                      | 6.3                       | 0.45    | Class A Amplifier  |
| 7X7            | Twin Diode—High-Mu Triode                 | 12C          | 8BZ                      | 6.3                       | 0.3     | Triode Unit as Class A Amplifier   |
| 7Y4            | Full-Wave Rectifier                       | 12B          | 5AB                      | 6.3                       | 0.5     | With Capacitive-Input Filter   |

| Plate<br>Volts                                  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA                | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduc-<br>tance<br>Micromhos   | Amplifi-<br>cation<br>Factor | Power        |                      | RCA<br>Type    |     |
|---|--|-------------------------|--------------------------------------|--|-------------------------------------|---|------------------------------|--------------|----------------------|----------------|-----|
|   |  |                         |                                      |  |                                     |   |                              | Load<br>Ohms | Out-<br>put<br>Watts |                |     |
| For other characteristics, refer to Type 6J5    |  |                         |                                      |  |                                     |   |                              |              |                      | 7A4            |     |
| 110   | — 7.5V                                 | 110                     | 3.0                                  | 40.0                                       | 16000                               | 5800  | —                            | 2500         | 1.5                  | 7A5            |     |
| 125   | — 9V                                   | 125                     | 3.3                                  | 44.0                                       | 17000                               | 6000  | —                            | 2700         | 2.2                  | 7A5            |     |
| Max. AC Voltage per Plate, 150 Volts, RMS       |  |                         |                                      |  |                                     | Max. DC Output Current per plate, 8 mA  |                              |              |                      | 7A6            |     |
| For other characteristics, refer to Type 6SK7   |  |                         |                                      |  |                                     |   |                              |              |                      | 7AF7           |     |
| 250   | — 3V                                   | 100                     | 3.2                                  | 3.0  | 700000                              | Anode-Grid (2): 250 max. volts, 4.2 mA<br>Oscillator-Grid No. 1 Resistor. Con-<br>version Transcond., 550 micromhos |                              |              |                      | 7A8            |     |
| 300   | 68Ω                                    | 150                     | 7.0                                  | 28.0                                       | 300000                              | 9500  | —                            | —            | —                    | 7AD7           |     |
| 250   | —10V                                   | —                       | —                                    | 9.0  | 7600                                | 2100  | 16                           | —            | —                    | 7AF7           |     |
| 250   | 250Ω                                   | 250                     | 2.0                                  | 6.0  | 1 M                                 | 4200  | —                            | —            | —                    | 7AG7           |     |
| 250   | 250Ω                                   | 250                     | 1.9                                  | 6.8  | 1 M                                 | 3300  | —                            | —            | —                    | 7AH7           |     |
| For other characteristics, refer to Type 6SF5   |  |                         |                                      |  |                                     |   |                              |              |                      | 7B4            |     |
| For other characteristics, refer to Type 6K6GT  |  |                         |                                      |  |                                     |   |                              |              |                      | 7B5            |     |
| For other characteristics, refer to Type 6SQ7   |  |                         |                                      |  |                                     |   |                              |              |                      | 7B6            |     |
| 250   | — 3V                                   | 100                     | 1.7                                  | 8.5  | —                                   | 750000  | 1750                         | —            | —                    | 7B7            |     |
| For other characteristics, refer to Type 6A8    |  |                         |                                      |  |                                     |   |                              |              |                      | 7B8            |     |
| For other characteristics, refer to Type 6V6    |  |                         |                                      |  |                                     |   |                              |              |                      | 7C5            |     |
| 250   | — 1V                                   | —                       | —                                    | 1.3  | 100000                              | 1000  | 100                          | —            | —                    | 7C6            |     |
| 250   | — 3V                                   | 100                     | 0.5                                  | 2.0  | 2 M                                 | 1300  | —                            | —            | —                    | 7C7            |     |
| 90  | —1.3                                   | —                       | —                                    | 15   | —                                   | 12500   | 33                           | —            | —                    | 7DJ8/<br>PCC88 |     |
| For other characteristics, refer to Type 6BF6   |  |                         |                                      |  |                                     |   |                              |              |                      | 7E6            |     |
| 250   | 330Ω                                   | 100                     | 1.6                                  | 7.5  | 700000                              | 1300  | —                            | —            | —                    | 7E7            |     |
| For other characteristics, refer to Type 6EY6   |  |                         |                                      |  |                                     |   |                              |              |                      | 7EY6           |     |
| For other characteristics, refer to Type 6SL7GT |  |                         |                                      |  |                                     |   |                              |              |                      | 7F7            |     |
| 250   | 500Ω                                   | —                       | —                                    | 6.0  | —                                   | 3300  | 48                           | —            | —                    | 7F8            |     |
| 250   | — 2V                                   | 100                     | 2.0                                  | 6.0  | 800000                              | 4500  | —                            | —            | —                    | 7G7            |     |
| 100   | — 1.5V                                 | 100                     | 2.6                                  | 7.5  | 350000                              | 4000  | —                            | —            | —                    | 7H7            |     |
| 250   | 180Ω                                   | 150                     | 3.2                                  | 10.0                                       | 800000                              | 4000  | —                            | —            | —                    | 7H7            |     |
| For other characteristics, refer to Type 6HG8   |  |                         |                                      |  |                                     |   |                              |              |                      | 7HG8           |     |
| 250   | Triode-Grid Resistor,<br>50000 ohms    |                         | 5.0                                  | Triode-Grid & Heptode-Grid Current, 0.4 mA |                                     |   |                              |              |                      | 7J7            |     |
| 250   | — 3V                                   | 100                     | 2.8                                  | 1.4  | 1.5 M                               | Conversion Transcond., 290 μmhos  |                              |              |                      |                |     |
| 250   | — 2V                                   | —                       | —                                    | 2.3  | 44000                               | 1600  | 70                           | —            | —                    | 7K7            |     |
| 250   | 75Ω                                    | 115                     | 3.6                                  | 25   | 45000                               | 24000   | —                            | —            | —                    | 7KZ6           |     |
| 100   | — 1V                                   | 100                     | 2.4                                  | 5.5  | 100000                              | 3000  | —                            | —            | —                    | 7L7            |     |
| 250   | — 1.5V                                 | 100                     | 1.5                                  | 4.5  | 1 M                                 | 3100  | —                            | —            | —                    | 7L7            |     |
| For other characteristics, refer to Type 6SN7GT |  |                         |                                      |  |                                     |   |                              |              |                      | 7N7            |     |
| 250   | — 2V                                   | 100                     | 8.5                                  | 3.5  | 1 M                                 | Grid No. 1 Resistor, 20000 ohms<br>Conversion Transcond., 450 μmhos   |                              |              |                      |                |     |
| 250   | — 1V                                   | 100                     | 2.1                                  | 5.7  | 1 M                                 | 3200  | —                            | —            | —                    | 7R7            |     |
| 100   | Triode-Grid Resistor,<br>50000 ohms    |                         | 3.0                                  | —  | —                                   | —   | —                            | —            | —                    | 7S7            |     |
| 250   | — 2V                                   | 100                     | 3.0                                  | 1.8  | 1.25 M                              | Conversion Transcond., 525 μmhos  |                              |              |                      |                |     |
| 300   | 160Ω                                   | 150                     | 3.9                                  | 10.0                                       | 300000                              | 5800  | —                            | —            | —                    | 7V7            |     |
| For other characteristics, refer to Type 7V7    |  |                         |                                      |  |                                     |   |                              |              |                      | 7W7            |     |
| 250   | — 1V                                   | —                       | —                                    | 1.9  | 67000                               | 1500  | 100                          | —            | —                    | 7X7            |     |
| Max. Peak Inverse Volts, 1250                   |  |                         |                                      | Max. DC Output mA, 70                      |                                     |   | Max. Peak Plate mA, 180      |              |                      |                | 7Y4 |

| RCA<br>Type    | Name                                      | Out-<br>line | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |         | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|----------------|---|--------------|--------------------------|---------------------------|---------|--|
|                |   |              |                          | Volts                     | Amperes |  |
|                |   |              |                          |                           |         |  |
| 7Z4            | Full-Wave Rectifier                       | 12C          | 5AB                      | 6.3                       | 0.9     | With Capacitive-Input Filter   |
| 8AL9           | High-Mu Triode<br>Sharp-Cutoff Pentode    | 8C           | 12HE                     | 8.6                       | 0.6     | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A Amplifier  |
| 8BH8           | Medium-Mu Triode<br>Sharp-Cutoff Pentode  | 6E           | 9DX                      | 8.4                       | 0.45    | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A Amplifier  |
| 8BN11          | Sharp-Cutoff Twin Pentode                 | 8B           | 12GF                     | 8.4                       | 0.6     | Each Unit as<br>Class A Amplifier  |
| 8CB11          | Sharp-Cutoff<br>Twin Pentode              | 8B           | 12DM                     | 8.4                       | 0.6     | Each Unit as Class A Amplifier   |
| 8EB8           | High-Mu Triode<br>Sharp-Cutoff Pentode    | 6E           | 9DX                      | 6.3                       | 0.75    | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit<br>as Class A Amplifier   |
| 8ET7           | Twin Diode—<br>Sharp-Cutoff Pentode       | 6E           | 9LT                      | 8                         | 0.6     | Pentode Unit as<br>Class A Amplifier   |
| 8FQ7           | Medium-Mu Twin Triode                     | 6E           | 9LP                      | 8.4                       | 0.45    | Vertical and Horizontal<br>Deflection Oscillators  |
| 8GJ7           | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6J           | 9QA                      | 8                         | 0.3     | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A<br>Amplifier   |
| 9A8            | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B           | 9DC                      | 9                         | 0.3     | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A<br>Amplifier   |
| 9AH9           | Medium-Mu Triode<br>Sharp-Cutoff Pentode  | 8B           | 12HJ                     | 8.8                       | 0.6     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                                    |
| 9AK10          | High-Mu Triple Triode                     | 8C           | 12FE                     | 9.5                       | 0.6     | Each Unit as Class A Amplifier   |
| 9AM10          | High-Mu Triple Triode                     | 8C           | 12FE                     | 9.5                       | 0.6     | Each Unit as Class A Amplifier   |
| 9AQ8/<br>PCC85 | High-Mu Twin Triode                       | 6B           | 9DE                      | 9.0                       | 0.3     | Each Unit as Class A Amplifier   |
| 9BJ11          | Beam Power Tube<br>Sharp-Cutoff Pentode   | 8B           | 12FU                     | 9.6                       | 0.45    | Beam Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A Amplifier  |
| 9BR7           | Twin Diode—High-Mu Triode                 | 6B           | 9CF                      | 4.7                       | 0.6     | Triode Unit as Class A Amplifier   |
|                |   |              |                          | 9.4                       | 0.3     |  |
| 9CL8           | Medium-Mu Triode—Sharp-Cutoff<br>Tetrode  | 6B           | 9FX                      | 9.5                       | 0.3     | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Tetrode Unit as Class A<br>Amplifier   |
| 9EA8           | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B           | 9AE                      | 9.5                       | 0.15    | Triode Unit as<br>Class A Amplifier  |
|                |   |              |                          |                           |         | Pentode Unit as<br>Class A Amplifier   |
| 9GV8           | High-Mu Triode—<br>Power Pentode          | 6G           | 9LY                      | 9.5                       | 0.6     | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A<br>Amplifier   |
| 9KC6           | Sharp-Cutoff Pentode                      | 6E           | 9RF                      | 8.7                       | 0.45    | Class A Amplifier  |
| 9LA6           | Sharp-Cutoff Pentode                      | 6E           | 9GK                      | 8.7                       | 0.45    | Class A Amplifier  |
| 9U8A           | Medium-Mu Triode—<br>Sharp-Cutoff Pentode | 6B           | 9AE                      | 9.45                      | 0.3     | Class A Amplifier  |
| 10             | Power Triode                              | 27B          | 4D                       | 7.5F                      | 1.25    | Class A Amplifier  |
| 10C8           | High-Mu Triode—Sharp-Cutoff<br>Pentode    | 6B           | 9DA                      | 10.5                      | 0.3     | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A<br>Amplifier   |
| 10CW5          | Power Pentode                             | 6G           | 9CV                      | 10.6                      | 0.45    | Vertical Deflection Amplifier  |
| 10DX8          | High-Mu Triode—<br>Sharp-Cutoff Pentode   | 6E           | 9HX                      | 10.2                      | 0.45    | Triode Unit as Class A Amplifier   |
|                |   |              |                          |                           |         | Pentode Unit as Class A<br>Amplifier   |
| 10EG7          | Dual Triode                               | 13B          | 8BD                      | 9.7                       | 0.6     | Class A Amplifier  |
| 10GF7          | Dual Triode                               | 11A          | 9QD                      | 9.7                       | 0.6     | Vertical Deflection Amplifier  |
|                |   |              |                          |                           |         | Vertical Deflection Oscillator   |

| Plate<br>Volts                                 | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA                       | AC Plate<br>Resist-<br>ance<br>Ohms     | Trans-<br>conduct-<br>ance<br>Micromhos               | Amplifi-<br>cation<br>Factor                                      | Power        |                      | RCA<br>Type    |
|--|--|-------------------------|--------------------------------------|---|---|---|---|--------------|----------------------|----------------|
|  |  |                         |                                      |   |   |   |   | Load<br>Ohms | Out-<br>put<br>Watts |                |
| Max. Peak Inverse Volts, 1250                  |  |                         |                                      | Max. DC Output mA, 100<br>Max. Peak Plate mA, 300 |   | Min. Total Effec. Supply<br>Imped. per Plate, 75 ohms |   |              |                      | 774            |
| 200  | 270Ω                                   | —                       | —                                    | 7.6   | 9200                                    | 6300  | 59  | —            | —                    | 8AL9           |
| 250  | 56Ω                                    | 150                     | 5.6                                  | 28  | 40000                                   | 30000   | —   | —            | —                    |                |
| 55   | 0V                                     | 125                     | 21                                   | 56  | Instantaneous Plate Knee characteristic |   |   |              |                      |                |
| For other characteristics, refer to Type 6BH8  |  |                         |                                      |   |   |   |   |              |                      | 8BH8           |
| For other characteristics, refer to Type 6BN11 |  |                         |                                      |   |   |   |   |              |                      | 8BN11          |
| 125  | 56Ω                                    | 125                     | 3.8                                  | 11  | 200000                                  | 13000   | —   | —            | —                    | 8CB11          |
| 250  | —                                      | —                       | —                                    | 2   | 37000                                   | 2700  | 100   | —            | —                    | 8EB8           |
| 200  | 68Ω                                    | 125                     | 7                                    | 25  | 75000                                   | 12500   | —   | —            | —                    |                |
| For other characteristics, refer to Type 6ET7  |  |                         |                                      |   |   |   |   |              |                      |                |
| For other characteristics, refer to Type 6FQ7  |  |                         |                                      |   |   |   |   |              |                      | 8FQ7           |
| For other characteristics, refer to Type 6GJ7  |  |                         |                                      |   |   |   |   |              |                      | 8GJ7           |
| 100  | — 2V                                   | —                       | —                                    | 14  | —                                       | 5000  | 20  | —            | —                    | 9A8            |
| 170  | — 2V                                   | 170                     | 2.8                                  | 10  | 400000                                  | 6200  | Ampl. Factor. (Grid<br>No. 2 to Grid No. 1), 47                   |              |                      |                |
| For other characteristics, refer to Type 6AH9  |  |                         |                                      |   |   |   |   |              |                      | 9AH9           |
| For other characteristics, refer to Type 6AK10 |  |                         |                                      |   |   |   |   |              |                      | 9AK10          |
| 100  | 200Ω                                   | —                       | —                                    | 8   | 9300                                    | 6900  | 64  | —            | —                    | 9AM10          |
| 200  | — 2V                                   | —                       | —                                    | 10  | —                                       | 5800  | 48  | —            | —                    | 9AQ8/<br>PCC85 |
| 125  | 120Ω                                   | 125                     | 2.5                                  | 8.5   | 40000                                   | 9600  | (Grid No. 1 = 10000Ω)   |              |                      |                |
| 110  | 0V                                     | 110                     | 6.8                                  | 5.8   | 40000                                   | 7500  |   |              |                      |                |
| 250  | 200Ω                                   | —                       | —                                    | 10  | 10900                                   | 4000  | 60  | —            | —                    | 9BR7           |
| 125  | 56Ω                                    | —                       | —                                    | 15  | 5000                                    | 8000  | 40  | —            | —                    | 9CL8           |
| 125  | — 1V                                   | 125                     | 4                                    | 12  | 100000                                  | 5800  | —   | —            | —                    |                |
| For other characteristics, refer to Type 6EA8  |  |                         |                                      |   |   |   |   |              |                      | 9EA8           |
| For other characteristics, refer to Type 6GV8  |  |                         |                                      |   |   |   |   |              |                      | 9GV8           |
| 250  | 56Ω                                    | 150                     | 9                                    | 18  | 55000                                   | 24000   | (E <sub>cs</sub> = 0V)<br>Instantaneous Plate Knee characteristic |              |                      |                |
| 50   | 0V                                     | 100                     | 25                                   | 25  | —                                       | —   |   |              |                      |                |
| 50   | 0V                                     | 125                     | 32                                   | 76  | —                                       | —   | —   | —            | —                    | 9LA6           |
| 250  | 0V                                     | 150                     | 6                                    | 25  | 55000                                   | 21000   | —   | —            | —                    |                |
| For other characteristics, refer to Type 6U8A  |  |                         |                                      |   |   |   |   |              |                      | 9U8A           |
| 425  | — 40V                                  | —                       | —                                    | 18.0  | 5000                                    | 1600  | 8.0   | 10200        | 1.6                  | 10             |
| 250  | 390Ω                                   | —                       | —                                    | 7.3   | 12000                                   | 4400  | 53  | —            | —                    | 10C8           |
| 135  | 100Ω                                   | 135                     | 3.2                                  | 11.5  | 190000                                  | 8000  | —   | —            | —                    |                |
| For other ratings, refer to Type 6CW5          |  |                         |                                      |   |   |   |   |              |                      | 10CW5          |
| For other characteristics, refer to Type 6DX8  |  |                         |                                      |   |   |   |   |              |                      | 10DX8          |
| For other characteristics, refer to Type 6EW7  |  |                         |                                      |   |   |   |   |              |                      | 10EG7          |
| For other ratings, refer to Type 6GF7          |  |                         |                                      |   |   |   |   |              |                      | 10GF7          |

| RCA Type                                | Name  | Out-line  | Terminal Diagram | Heater or Filament (F) |                              | Use<br>Values to right give operating conditions and characteristics for indicated typical use                |
|---|---|-----------|------------------|------------------------|------------------------------|---|
|   |   |           |                  | Volts                  | Amperes                      |   |
|   |   |           |                  |                        |                              |   |
| 10JA8                                   | High-Mu Triode Sharp-Cutoff Pentode           | 6E        | 9DX              | 10.5                   | 0.45                         | Class A Amplifier   |
| 10LB8                                   | Medium-Mu Triode Sharp-Cutoff Pentode         | 10A       | 9DX              | 10.2                   | 0.45                         | Class A Amplifier   |
| 10LW8                                   | High-Mu Triode Sharp-Cutoff Pentode           | 6E        | 9DX              | 10.5                   | 0.45                         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier   |
| 10LZ8                                   | High-Mu Triode—Sharp-Cutoff Pentode           | 6E        | 9DX              | 10.5                   | 0.45                         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier   |
| 11                                      | Detector Amplifier                            | 4F        | 4F               | 1.1F                   | 0.25                         | Class A Amplifier   |
| 11CA11                                  | Dual Triode Sharp-Cutoff Pentode              | 8B        | 12HN             | 10.7                   | 0.6                          | Triode Unit 1 as Class A Amplifier<br>Triode Unit 2 as Class A Amplifier<br>Pentode Unit as Class A Amplifier |
| 11CF11                                  | Dual Triode Sharp-Cutoff Pentode              | 8B        | 12HW             | 10.7                   | 0.6                          | Triode Unit 1 as Class A Amplifier<br>Triode Unit 2 as Class A Amplifier<br>Pentode Unit as Class A Amplifier |
| 11CH11                                  | Dissimilar Double Triode Sharp-Cutoff Pentode | 8B        | 12G3             | 10.7                   | 0.6                          | Triode Unit 1 as Class A Amplifier<br>Triode Unit 2 as Class A Amplifier<br>Pentode Unit as Class A Amplifier |
| 11CY7                                   | Dual Triode                                   | 6E        | 9LG              | 11                     | 0.45                         | Vertical Deflection Oscillator and Amplifier  |
| 11JE8                                   | High-Mu Triode Sharp-Cutoff Pentode           | 6E        | 9DK              | 10.9                   | 0.45                         | Class A Amplifier   |
| 11Y9                                    | Dual Pentode                                  | 6L        | 10L              | 11                     | 0.45                         | Unit No. 1 as Class A Amplifier<br>Unit No. 2 as Class A Amplifier  |
| 12A5                                    | Power Pentode                                 | 22 or 13H | 7F               | 6.3<br>12.6            | 0.6<br>0.3                   | Class A Amplifier   |
| 12A6 <sup>†</sup><br>12A6Y <sup>†</sup> | Beam Power Tube                               | 2B        | 7AC              | 12.6                   | 0.15                         | Class A Amplifier   |
| 12A7                                    | Rectifier—Power Pentode                       | 24B       | 7K               | 12.6                   | 0.3                          | Pentode Unit as Class A Amplifier<br>Half-Wave Rectifier  |
| 12A8GT                                  | Pentagrid Converter                           | 14A       | 8A               | 12.6                   | 0.15                         | Converter   |
| 12AC6                                   | Remote-Cutoff Pentode                         | 5C        | 7BK              | 10.0<br>to<br>15.9     | 0.15<br>approx.<br>at 12.6 V | Class A Amplifier   |
| 12AD6                                   | Pentagrid Converter                           | 5C        | 7CH              | 10.0<br>to<br>15.9     | 0.15<br>approx.<br>at 12.6 V | Converter   |
| 12AE6                                   | Twin Diode—Medium-Mu Triode                   | 5C        | 7BT              | 10.0<br>to<br>15.9     | 0.15<br>approx.<br>at 12.6 V | Triode Unit as Class A Amplifier  |
| 12AE6A                                  | Twin Diode—Medium-Mu Triode                   | 5C        | 7BT              | 10.0<br>to<br>15.9     | 0.15<br>approx.<br>at 12.6 V | Triode Unit as Class A Amplifier  |
| 12AE7                                   | Dual Triode                                   | 6B        | 9A               | 10.0<br>to<br>15.9     | 0.45<br>approx.<br>at 12.6 V | Unit No. 1 as Class A Amplifier<br>Unit No. 2 as Class A Amplifier  |
| 12AF6                                   | Remote-Cutoff Pentode                         | 5C        | 7BK              | 10.0<br>to<br>15.9     | 0.15<br>approx.<br>at 12.6 V | Class A Amplifier   |
| 12AH7<br>GT                             | Medium-Mu Twin Triode                         | 13C       | 8BE              | 12.6                   | 0.15                         | Each Unit as Class A Amplifier  |
| 12AJ6                                   | Twin Diode—Medium-Mu Triode                   | 5C        | 7BT              | 10.0<br>to<br>15.9     | 0.15<br>approx.<br>at 12.6 V | Triode Unit as Class A Amplifier  |

<sup>†</sup> Industrial type



| Plate<br>Volts                                       | Grid Bias<br>or<br>Cathode<br>Resistor                       | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms     | Trans-<br>conduct-<br>ance<br>Micromhos                                 | Amplifi-<br>cation<br>Factor                                 | Power        |                      | Type<br>RCA     |
|--|--|-------------------------|--------------------------------------|-----------------------------|---|---|--|--------------|----------------------|-----------------|
|  |  |                         |                                      |                             |   |   |  | Load<br>Ohms | Out-<br>put<br>Watts |                 |
| For other characteristics, refer to Type 10JA8/10LZ8 |  |                         |                                      |                             |   |   |  |              |                      | 10JA8           |
| For other characteristics, refer to Type 6LB8        |  |                         |                                      |                             |   |   |  |              |                      | 10LB8           |
| 200  | -2V  | —                       | —                                    | 2.6                         | 18700                                   | 4000  | 75   | —            | —                    | 10LW8           |
| 200  | 82Ω  | 100                     | 2.8                                  | 16.5                        | 60000                                   | 19000   | —  | —            | —                    |                 |
| 35   | 0  | 100                     | 12.5                                 | 48                          | Instantaneous Plate Knee characteristic |   |  |              |                      |                 |
| 250  | -2   | —                       | —                                    | 1.1                         | 52000                                   | 2100  | 110  | —            | —                    | 10LZ8           |
| 200  | 0  | 140                     | 2.5                                  | 12                          | 150000                                  | 9500  | —  | —            | —                    |                 |
| 135  | -10.5V   | —                       | —                                    | 3                           | 15500                                   | 440   | —  | —            | —                    | 11              |
| 200  | 270Ω   | —                       | —                                    | 7.6                         | 9200                                    | 6300  | 59   | —            | —                    | 11CA11          |
| 200  | 270Ω   | —                       | —                                    | 7.1                         | 12400                                   | 5500  | 69   | —            | —                    |                 |
| 200  | 65Ω  | 120                     | 4.9                                  | 27.5                        | 490000                                  | 21200   | —  | —            | —                    | 11CF11          |
| 40   | 0V   | 120                     | 17.6                                 | 68                          | Instantaneous Plate Knee characteristic |   |  |              |                      |                 |
| 200  | 270Ω   | —                       | —                                    | 7.1                         | 12400                                   | 5500  | 69   | —            | —                    |                 |
| 200  | 270Ω   | —                       | —                                    | 7.6                         | 9200                                    | 6300  | 59   | —            | —                    | 11CH11          |
| 200  | 65Ω  | 120                     | 4.9                                  | 27.5                        | 490000                                  | 21200   | —  | —            | —                    |                 |
| 40   | 0V   | 120                     | 17.6                                 | 68                          | Instantaneous Plate Knee characteristic |   |  |              |                      |                 |
| 200  | 270Ω   | —                       | —                                    | 7.1                         | 12500                                   | 5500  | 69   | —            | —                    | 11CY7           |
| 200  | 470Ω   | —                       | —                                    | 7.2                         | 7600                                    | 5300  | 40   | —            | —                    |                 |
| 200  | 65Ω  | 120                     | 4.9                                  | 27.5                        | 490000                                  | 20000   | —  | —            | —                    | 11JE8           |
| 50   | 0V   | 120                     | 18                                   | 71                          | Instantaneous Plate Knee characteristic |   |  |              |                      |                 |
| For other characteristics, refer to Type 6CY7        |  |                         |                                      |                             |   |   |  |              |                      | 11CY7           |
| For other characteristics, refer to Type 6JE8        |  |                         |                                      |                             |   |   |  |              |                      | 11JE8           |
| 170  | -2.6   | 170                     | 6.5                                  | 30                          | —                                       | 21000   | Ampl. Factor (Grid-No. 1 to Grid-No. 2), 38                  |              | 11Y9                 |                 |
| 150  | -2.3   | 150                     | 3                                    | 10                          | —                                       | 8500  | Ampl. Factor (Grid-No. 1 to Grid No. 2), 35                  |              |                      |                 |
| 180  | -25V   | 180                     | 8.0                                  | 45.0                        | 35000                                   | 2400  | —  | 3300         | 3.4                  | 12A5            |
| 250  | -12.5V   | 250                     | 3.5                                  | 30                          | 70000                                   | 3000  | —  | 7000         | 3.4                  | 12A6*<br>12AGY* |
| 135  | -13.5V   | 135                     | 2.5                                  | 9.0                         | 100000                                  | 975   | —  | 13500        | 0.55                 | 12A7            |
| Maximum AC Plate Voltage.....                        |  |                         |                                      |                             |   |   | 125 Volts, RMS   |              |                      | 12A8T           |
| Maximum DC Output Current.....                       |  |                         |                                      |                             |   |   | 30 Milliamperes  |              |                      |                 |
| For other characteristics, refer to Type 6A8GT       |  |                         |                                      |                             |   |   |  |              |                      | 12A8GT          |
| 12.6   | —  | 12.6                    | .2                                   | .55                         | 500000                                  | 730   | {Grid-No. 1 Supply Volts, 0<br>Grid-No. 1 Res., 2.2 megohms} |              | 12AC6                |                 |
| 12.6   | Self-<br>excited   | 12.6                    | 1.5                                  | 0.45                        | 1 M                                     | Grid-No. 1 Resistor, 33000 ohms<br>Conversion Transcond., 260 micromhos |  |              | 12AD6                |                 |
| 12.6   | 0V   | —                       | —                                    | 0.75                        | 15000                                   | 1000  | 15   | —            | —                    | 12AE6           |
| 12.6   | 0V   | —                       | —                                    | 1                           | 13000                                   | 1300  | 16.7   | —            | —                    | 12AE6A          |
| 12.6   | Grid Res. 1.5 megohms  | —                       | —                                    | 1.9                         | 3150                                    | 4000  | 13.0   | —            | —                    | 12AE7           |
| 12.6   | Grid Res. 1 megohm   | —                       | —                                    | 7.5                         | 985                                     | 6500  | 6.4  | —            | —                    |                 |
| 12.6   | —  | 12.6                    | 0.45                                 | 1.1                         | 350000                                  | 1500  | {Grid-No. 1 Supply Volts, 0<br>Grid-No. 1 Res., 2.2 megohms} |              | 12AF6                |                 |
| 180  | -6.5V  | —                       | —                                    | 7.6                         | 8400                                    | 1900  | 16   | —            | —                    | 12AH7<br>GT     |
| 12.6   | {Grid-No. 1 Supply Volts, 0<br>Grid-No. 1 Res., 2.2 megohms} |                         |                                      | 0.75                        | 45000                                   | 1200  | 55   | —            | —                    | 12AJ6           |

| RCA Type              | Name                                  | Out-line   | Terminal Diagram | Heater or Filament (F)           |                        | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|-----------------------|---------------------------------------|------------|------------------|----------------------------------|------------------------|--|
|                       |                                       |            |                  | Volts                            | Amperes                |  |
|                       |                                       |            |                  | Triode Unit as Class A Amplifier |                        |  |
| 12AL8                 | Medium-Mu Triode—Power Tetrode        | 6E         | 9GS              | 10.0 to 15.9                     | 0.55 approx. at 12.6 V | Tetrode Unit as Class A Amplifier  |
| 12AT7WA♦<br>12AT7WB♦  | High-Mu Twin Triode                   | 6B         | 9A               | 12.6<br>6.3                      | 0.15<br>0.3            | Class A Amplifier  |
| 12AU7                 | Medium-Mu Twin Triode                 | 6B         | 9A               | 6.3<br>12.6                      | 0.3<br>0.15            | Each Unit as Class A Amplifier   |
| 12AV7                 | Medium-Mu Twin Triode                 | 6B         | 9A               | 6.3<br>12.6                      | 0.45<br>0.225          | Each Unit as Class A Amplifier   |
| 12AW6                 | Sharp-Cutoff Pentode                  | 5C         | 7CM              | 12.6                             | 0.15                   | Class A Amplifier  |
| 12AX4-GT<br>12AX4-GTA | Half-Wave Rectifier                   | 13D<br>13D | 4CG              | 12.6<br>12.6                     | 0.6<br>0.6             | Television Damper Service  |
| 12AX7                 | High-Mu Twin-Triode                   | 6B         | 9A               | 6.3<br>12.6                      | 0.3<br>0.15            | Each Unit as Class A Amplifier   |
| 12AY3                 | Half-Wave Rectifier                   | 11D        | 9HP              | 12.6                             | 0.6                    | Television Damper Service  |
| 12AZ7                 | High-Mu Twin-Triode                   | 6B         | 9A               | 6.3<br>12.6                      | 0.45<br>0.225          | Each Unit as Class A Amplifier   |
| 12B8GT                | High-Mu Triode—Remote-Cutoff Pentode  | —          | 8T               | 12.6                             | 0.3                    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 12BA7                 | Pentagrid Converter                   | 6E         | 8CT              | 12.6                             | 0.15                   | Converter  |
| 12BD6                 | Remote-Cutoff Pentode                 | 5C         | 7BK              | 12.6                             | 0.15                   | Class A Amplifier  |
| 12BF6                 | Twin Diode—Medium-Mu Triode           | 5C         | 7BT              | 12.6                             | 0.15                   | Triode Unit as Class A Amplifier   |
| 12BH7                 | Medium-Mu Twin Triode                 | 6E         | 9A               | 6.3<br>12.6                      | 0.6<br>0.3             | Vertical Deflection Amplifier  |
| 12BK5                 | Beam Power Tube                       | 6E         | 9BQ              | 12.6                             | 0.6                    | Class A Amplifier  |
| 12BL6                 | Remote-Cutoff Pentode                 | 5C         | 7BK              | 10.0 to 15.9                     | 0.15 approx. at 12.6V  | Class A Amplifier  |
| 12BN6                 | Beam Tube                             | 5D         | 7DF              | 12.6                             | 0.15                   | Limiter and Discriminator  |
| 12BR7                 | Twin Diode—High-Mu Triode             | 6B         | 9CF              | 6.3<br>12.6                      | 0.45<br>0.225          | Triode Unit as Class A Amplifier   |
| 12BS3                 | Half-Wave Rectifier                   | 11D        | 9HP              | 12.6                             | 0.6                    | Television Damper Service  |
| 12BT3                 | Half-Wave Rectifier                   | 8C         | 12BL             | 12.6                             | 0.45                   | Television Damper Service  |
| 12BV7                 | Sharp-Cutoff Pentode                  | 6E         | 9BF              | 6.3<br>12.6                      | 0.6<br>0.3             | Class A Amplifier  |
| 12BW4                 | Full-Wave Rectifier                   | 6E         | 9DJ              | 6.3                              | 0.9                    | With Capacitive Input Filter<br>With Inductive Input Filter                                    |
| 12BY7                 | Sharp-Cutoff Pentode                  | 6E         | 9BF              | 6.3<br>12.6                      | 0.6<br>0.3             | Class A Amplifier  |
| 12BZ7                 | High-Mu Twin Triode                   | 6E         | 9A               | 12.6                             | 0.3                    | Each Unit as Class A Amplifier   |
| 12C8                  | Twin Diode—Semiremote-Cutoff Pentode  | 3          | 8E               | 12.6                             | 0.15                   | Pentode Unit as RF Amplifier   |
| 12CK3                 | Half-Wave Rectifier                   | 30B        | 9HP              | 12.6                             | 0.6                    | Television Damper Service  |
| 12CN5                 | Remote-Cutoff Pentode                 | 5D         | 7CV              | 10.0 to 15.9                     | 0.45 approx. at 12.6V  | Class A Amplifier  |
| 12CR6                 | Diode-Remote-Cutoff Pentode           | 5C         | 7EA              | 6.3                              | 0.3                    | Pentode Unit as Class A Amplifier  |
| 12CT8                 | Medium-Mu Triode—Sharp-Cutoff Pentode | 6E         | 9DA              | 12.6                             | 0.3                    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |

| Plate<br>Volts   | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduct-<br>ance<br>Micromhos | Amplifi-<br>cation<br>Factor   | Power                           |                      | RCA<br>Type                   |       |
|--|--|-------------------------|--------------------------------------|-----------------------------|-------------------------------------|---|--|---------------------------------|----------------------|-------------------------------|-------|
|  |  |                         |                                      |                             |                                     |   |  | Load<br>Ohms                    | Out-<br>put<br>Watts |                               |       |
| 12.6   | — 0.9V<br>(across 2.2 megohm res.)     | —                       | —                                    | .5                          | 13000                               | 1000                                    | 13   | —                               | —                    |                               |       |
| Grid-No. 2 (Control Grid) Volts, —.5<br>(across 2.2 megohm res.)                                       |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12A18                         |       |
| Grid-No. 1 (Space-Charge Grid) Volts, 12.6<br>Transcond. (Grid-No. 2 to Plate), 15000 $\mu$ mhos       |  |                         |                                      |                             |                                     |   |  |                                 |                      |                               |       |
| Ampl. Factor (Grid-No. 2 to Plate) 7.2<br>Grid-No. 1 mA, 75 Plate mA, 40<br>Plate Resistance, 480 ohms |  |                         |                                      |                             |                                     |   |  |                                 |                      |                               |       |
| For other characteristics, refer to Type 12A17   |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12A17WA*<br>12A17WB*          |       |
| 100  | 0V                                     | —                       | —                                    | 11.8                        | 6250                                | 3100                                    | 19.5   | —                               | —                    | 12A18                         |       |
| 250  | — 8.5V                                 | —                       | —                                    | 10.5                        | 7700                                | 2200                                    | 17   | —                               | —                    | 12A17                         |       |
| 150  | 56 $\Omega$                            | —                       | —                                    | 18                          | 4800                                | 8500                                    | 41   | Cutoff Volts, —12               |                      | 12A17                         |       |
| For other characteristics, refer to Type 6AG5  |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12A16                         |       |
| Max. Peak Inverse Plate Volts, 4400<br>Max. Peak Plate mA, 750<br>Max. DC Plate mA, 125                |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12AX4-<br>GT<br>12AX4-<br>GTA |       |
| Max. Peak Heater-Cathode Volts: { —4400<br>+300<br>DC component must not exceed 900 volts              |  |                         |                                      |                             |                                     |   |  |                                 |                      |                               |       |
| 100  | — 1V                                   | —                       | —                                    | 0.5                         | 80000                               | 1250                                    | 100  | —                               | —                    | 12AX7                         |       |
| 250  | — 2V                                   | —                       | —                                    | 1.2                         | 62500                               | 1800                                    | 100  | —                               | —                    | 12AX7                         |       |
| For other ratings, refer to Type 6AY3  |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12AY3                         |       |
| 100  | 270 $\Omega$                           | —                       | —                                    | 3.7                         | 15000                               | 4000                                    | 60   | —                               | —                    | 12A27                         |       |
| 250  | 200 $\Omega$                           | —                       | —                                    | 10.0                        | 10900                               | 5500                                    | 60   | —                               | —                    | 12A27                         |       |
| 90   | 0V                                     | —                       | —                                    | 2.8                         | 37000                               | 2400                                    | 90   | —                               | —                    | 12B8GT                        |       |
| 90   | — 3V                                   | 90                      | 2                                    | 7                           | 200000                              | 1800                                    | —  | —                               | —                    | 12B8GT                        |       |
| For other characteristics, refer to Type 6BA7  |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12BA7                         |       |
| For other characteristics, refer to Type 6BD6  |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12BD6                         |       |
| 250  | — 9V                                   | —                       | 16                                   | 1900                        | 9.5                                 | 8500                                    | —  | Power Output,<br>300 milliwatts |                      | 12BF6                         |       |
| Max. DC Plate Volts, 450<br>Max. DC Plate mA, 20   |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12BH7                         |       |
| Absolute Max. Peak Positive-Pulse Plate Volts, 1500<br>Max. Plate Dissipation (Each Unit), 3.5 watts   |  |                         |                                      |                             |                                     |   |  |                                 |                      |                               |       |
| 250  | — 5V                                   | 250                     | 3.5                                  | 35                          | 100000                              | 8500                                    | —  | 6500                            | 3.5                  | 12BK5                         |       |
| 12.6   | Grid-No. 1<br>Supply<br>Volts, 0       | 12.6                    | 0.5                                  | 1.35                        | 500000                              | 1350                                    | Grid-No. 1 and Grid-No. 3 Volts<br>for transcond. of 10<br>micromhos, —5 |                                 |                      |                               | 12BL6 |
| For other characteristics, refer to Type 6BN6/6KS6   |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12BN6                         |       |
| 100  | 270 $\Omega$                           | —                       | —                                    | 3.7                         | 15000                               | 4000                                    | 60   | —                               | —                    | 12BR7                         |       |
| 250  | 200 $\Omega$                           | —                       | —                                    | 10                          | 10900                               | 5500                                    | 60   | —                               | —                    | 12BR7                         |       |
| For other ratings, refer to Type 6BS3  |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12BS3                         |       |
| Max. Peak Inverse Plate Volts, 3300<br>Max. Peak Plate mA, 1000  |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12BT3                         |       |
| Max. Average Plate mA, 165<br>Max. Peak Heater-Cathode Volts: { —3300<br>+300                          |  |                         |                                      |                             |                                     |   |  |                                 |                      |                               |       |
| 250  | 68 $\Omega$                            | 150                     | 6                                    | 27                          | 85000                               | 13000                                   | —  | —                               | —                    | 12BV7                         |       |
| 250  | — 8V                                   | 180                     | —                                    | 0.5                         | —                                   | —                                       | —  | —                               | —                    | 12BV7                         |       |
| For other characteristics, refer to 6BW4   |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12BW4                         |       |
| 250  | 100 $\Omega$                           | 180                     | 5.75                                 | 26                          | 93000                               | 11000                                   | —  | —                               | —                    | 12BY7                         |       |
| 250  | — 2V                                   | —                       | —                                    | 2.5                         | 31800                               | 3200                                    | 100  | —                               | —                    | 12BZ7                         |       |
| 250  | — 3V                                   | 125                     | 2.3                                  | 10                          | 600000                              | 1325                                    | —  | —                               | —                    | 12C8                          |       |
| For other characteristics, refer to Type 6CK3  |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12CK3                         |       |
| 12.6   | —                                      | 12.6                    | 3.5                                  | 4.5                         | 40000                               | 3800                                    | { Grid-No. 1 Supply Volts, 0<br>Grid-No. 1 Res., 2.2 megohms }           |                                 |                      | 12CN5                         |       |
| For other characteristics, refer to Type 6CR6  |  |                         |                                      |                             |                                     |   |  |                                 |                      | 12CR6                         |       |
| 150  | 150 $\Omega$                           | —                       | —                                    | 9                           | 8200                                | 4900                                    | 40   | —                               | —                    | 12CT8                         |       |
| 200  | 82 $\Omega$                            | 125                     | 3.4                                  | 15                          | 150000                              | 7000                                    | —  | —                               | —                    | 12CT8                         |       |

| RCA Type        | Name                                       | Out-line   | Terminal Diagram | Heater or Filament (F) |                        | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|-----------------|--|------------|------------------|------------------------|------------------------|--|
|                 |  |            |                  | Volts                  | Amperes                |  |
|                 |  |            |                  |                        |                        |  |
| 12CX6           | Remote-Cutoff Pentode                      | 5C         | 7BK              | 10.0 to 15.9           | 0.15 approx. at 12.6V  | Class A Amplifier  |
| 12D4            | Half-Wave Rectifier                        | 13D        | 4CG              | 12.6                   | 0.6                    | Television Damper Service  |
| 12DB5           | Beam Power Tube                            | 6F         | 9GR              | 12.6                   | 0.6                    | Class A Amplifier  |
| 12DE8           | Diode—Remote-Cutoff Pentode                | 6J         | 9HG              | 10.0 to 15.9           | 0.2 approx. at 12.6V   | Pentode Unit as Class A Amplifier  |
| 12DK7           | Twin Diode—Power Tetrode                   | 6E         | 9HZ              | 10.0 to 15.9           | 0.5 approx. at 12.6V   | Tetrode Unit as Class A Amplifier  |
| 12DL8           | Twin Diode—Power Tetrode                   | 6E         | 9HR              | 10.0 to 15.9           | 0.55 approx. at 12.6V  | Tetrode Unit as Class A Amplifier  |
| 12DM4<br>12DM4A | Half-Wave Rectifier                        | 13F<br>13G | 4CG              | 12.6                   | 0.6                    | Television Damper Service  |
| 12DQ6A          | Beam Power Tube                            | 20A        | 6AM              | 12.6                   | 0.6                    | Horizontal Deflection Amplifier  |
| 12DQ6B          | Beam Power Tube                            | 20A        | 6AM              | 12.6                   | 0.6                    | Horizontal Deflection Amplifier  |
| 12DQ7           | Power Pentode                              | 6E         | 9BF              | 6.3 to 12.5            | 0.6 to 0.3             | Class A Amplifier  |
| 12DS7<br>12DS7A | Twin Diode—Power Tetrode                   | 6E<br>6E   | 9JU              | 10.0 to 15.9           | 0.4 approx. at 12.6V   | Tetrode Unit as Class A Amplifier  |
|                 |  |            |                  |                        |                        | Diode Units  |
| 12DU7           | Twin Diode—Power Tetrode                   | 6B         | 9JX              | 10.0 to 15.9           | 0.25 approx. at 12.6V  | Tetrode Unit as Class A Amplifier  |
| 12DV8           | Twin Diode—Power Tetrode                   | 6E         | 9HR              | 10.0 to 15.9           | 0.375 approx. at 12.6V | Class A Amplifier  |
| 12DW4A          | Half-Wave Rectifier                        | 11D        | 9HP              | 12.6                   | 0.6                    | Television Damper Service  |
| 12DW7           | Dual Triode                                | 6B         | 9A               | 12.6 to 6.3            | 0.15 to 0.3            | Unit No. 1 as Class A Amplifier<br>Unit No. 2 as Class A Amplifier                             |
| 12DY8           | Medium-Mu Triode—Remote-Cutoff Tetrode     | 6B         | 9JD              | 10.0 to 15.9           | 0.35 approx. at 12.6V  | Triode Unit as Class A Amplifier<br>Tetrode Unit as Signal Seeker Relay                        |
| 12DZ6           | Remote-Cutoff Pentode                      | 5C         | 7BK              | 10.0 to 15.9           | 0.19 approx. at 12.6V  | Class A Amplifier  |
| 12EA6           | Remote-Cutoff Pentode                      | 5C         | 7BK              | 10.0 to 15.9           | 0.19 approx. at 12.6V  | Class A Amplifier  |
| 12EC8           | Medium-Mu Triode—Semiremote-Cutoff Pentode | 6B         | 9FA              | 10.0 to 15.9           | 0.225 approx. at 12.6V | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 12ED5           | Beam Power Tube                            | 5D         | 7CV              | 12.6                   | 0.45                   | Class A Amplifier  |
| 12EG6           | Pentagrid Amplifier                        | 5C         | 7CH              | 10.0 to 15.9           | 0.15 approx. at 12.6V  | Class A Amplifier  |
| 12EH5           | Power Pentode                              | 5D         | 7CV              | 12.6                   | 0.6                    | Push-Pull Class AB, Amplifier  |
| 12EK6           | Remote-Cutoff Pentode                      | 5C         | 7BK              | 10.0 to 15.9           | 0.19 approx. at 12.6V  | Class A Amplifier  |
| 12EL6           | Twin Diode—High-Mu Triode                  | 5C         | 7FB              | 10.0 to 15.9           | 0.15 approx. at 12.6V  | Class A Amplifier  |

| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor   | Screen<br>Grid<br>Volts                       | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA                 | AC Plate<br>Resist-<br>ance<br>Ohms   | Trans-<br>conduc-<br>tance<br>Micromhos | Amplifi-<br>cation<br>Factor   | Power        |                      | RCA<br>Type     |
|---|--|---|--------------------------------------|---|---|---|--|--------------|----------------------|-----------------|
|   |  |   |                                      |   |   |   |  | Load<br>Ohms | Out-<br>put<br>Watts |                 |
| 12.6  | Grid-No. 1<br>Supply<br>Volts, 0   | 12.6  | 1.4                                  | 3   | 40000   | 3100                                    | Grid-No. 1 Volts for Plate<br>Current of 10 $\mu$ A, -4.5                |              | 12CX6                |                 |
| Max. Peak Inverse Plate Volts, 4400<br>Max. Peak Plate mA, 900<br>Max. Average Plate mA, 155  |  |   |                                      | Max. Peak Heater-Cathode Volts, -4400, +300 |   |   |  | 12D4         |                      |                 |
| 200   | 180 $\Omega$   | 125   | 2.2                                  | 46  | 28000   | 8000                                    | Plate Dissipation 5.5 watts  |              | 12DB5                |                 |
| 12.6  | —  | 12.6  | 0.5                                  | 1.3   | 300000  | 1500                                    | Grid No. 1 Supply Volts, 0<br>Grid-No. 1 Res., 2.2 megohms               |              | 12DE8                |                 |
| 12.6  | —  | 12.6  | 1                                    | 6   | 4000  | 5000                                    | — 3500 0.010   |              | 12DK7                |                 |
| 12.6  | Grid-No. 2 (Control Grid) Volts, -0.5<br>(across 2.2 megohm resistor)<br>Grid-No. 1 (Space-Charge Grid) Volts, 12.6<br>Transcond. (Grid-No. 2 to Plate), 15000 $\mu$ hos |   |                                      |   | Ampl. Factor (Grid-No. 2 to Plate) 7.2<br>Grid-No. 1 mA, 75<br>Plate Resistance, 480 ohms |   | Plate mA, 40   |              | 12DL8                |                 |
| For other characteristics, refer to Type 6DM4   |  |   |                                      |   |   |   |  |              |                      |                 |
| Max. DC Plate Volts, 700<br>Max. DC Cathode mA, 140   |  |   |                                      |   | Max. Peak Positive-Pulse Plate Volts, 6000 (Abs.)<br>Max. Plate Dissipation, 15 watts     |   |  |              |                      | 12DM4<br>12DM4A |
| For other ratings, refer to Type 6DQ6B  |  |   |                                      |   |   |   |  |              |                      |                 |
| 200   | 68 $\Omega$  | 125   | 5.6                                  | 26  | 53000   | 10500                                   | — — —  |              | 12DQ6B               |                 |
| 12.6  | 12.6V  | -0.5<br>(across<br>2.2<br>megohm<br>resistor) | 75<br>(Grid-<br>No. 1)               | 35  | 500   | 19000<br>(Grid-<br>No. 2<br>to Plate)   | 9.1<br>(Grid-<br>No. 2<br>to Plate)                                      |              | 12DS7<br>12DS7A      |                 |
| Diode Plate mA, with 10 Volts Applied, 3 mA   |  |   |                                      |   |   |   |  |              |                      |                 |
| 12.6  | —  | 12.6  | 1.5                                  | 12  | 6000  | 6200                                    | — 2700 0.025   |              | 12DU7                |                 |
| Grid-No. 2 (Control Grid) Resistor, 4.7 megohms<br>Grid-No. 1 (Space-Charge Grid) Volts, 12.6<br>Transcond. (Grid-No. 2 to Plate), 8500 $\mu$ hos |  |   |                                      |   | Ampl. Factor (Grid-No. 2 to Plate) 7.6<br>Grid-No. 1 mA, 53<br>Plate Resistance, 900 ohms |   | Plate mA, 9  |              | 12DV8                |                 |
| For other characteristics, refer to Type 6DW4A  |  |   |                                      |   |   |   |  |              |                      |                 |
| 250   | -2V  | —   | —                                    | 1.2   | 62500   | —                                       | 100 — —  |              | 12DW4A               |                 |
| 250   | -8.5V  | —   | —                                    | 10.5  | 7700  | 2200                                    | 17 — —   |              | 12DW7                |                 |
| 12.6  | —  | —   | —                                    | 1.2   | 10000   | 2000                                    | 20 — —   |              |                      |                 |
| 10  | —  | 10  | —                                    | 5 min.                                      | Grid No. 1 resistor   | 10 megohms.                             | Plate Load 700 ohms  |              | 12DY8                |                 |
| 15  | -6V  | 15  | —                                    | 3 max.                                      | —   | —                                       | Plate Load 700 ohms  |              |                      |                 |
| 12.6  | Grid-No.1<br>Supply<br>Volts, 0  | 12.6  | 2.2                                  | 4.5   | 25000   | 3800                                    | — — —  |              | 12DZ6                |                 |
| 12.6  | —  | 12.6  | 1.4                                  | 3.2   | 32000   | 3800                                    | [Grid-No. 1 Supply Volts, 0<br>{Grid-No. 1 Res., 10 megohms}]            |              | 12EA6                |                 |
| 12.6  | 4700 $\Omega$<br>(Grid Res.)   | —   | —                                    | 2.4   | 6000  | 4700                                    | 25 — —   |              | 12EC8                |                 |
| 12.6  | —  | 12.6  | 0.28                                 | 0.66  | 750000  | 2000                                    | Grid No. 1 Res., 33000 ohms  |              |                      |                 |
| 1.25  | -4.5V  | 125   | 7                                    | 37  | 14000   | 8500                                    | — 4500 1.5   |              | 12ED5                |                 |
| 12.6  | -0.6V†   | 12.6  | 2.8                                  | .55   | 150000  | 800†                                    | ‡Between Grid No. 3 & Plate<br>‡bias voltage across res.<br>2.2 megohms  |              | 12EG6                |                 |
| 140   | 68 $\Omega$  | 120   | 11□                                  | 47□   | —   | —                                       | 6000 3.8†  |              | 12EH5                |                 |
| 12.6  | —  | 12.6  | 1.7                                  | 4   | 50000   | 4200                                    | Grid-No. 1 Supply Volts, 0<br>Grid-No. 1 Res. (Bypassed),<br>2.2 megohms |              | 12EK6                |                 |
| 12.6  | 0V   | —   | —                                    | 0.75  | 45000   | 1200                                    | 55 — —   |              | 12EL6                |                 |

† For two tubes at stated plate-to-plate load.

□ For two tubes.

| RCA Type        | Name   | Out-line | Terminal Diagram | Heater or Filament (F) |                        | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|-----------------|--|----------|------------------|------------------------|------------------------|--|
|                 |  |          |                  | Volts                  | Amperes                |  |
| 12EM6           | Diode—Power Tetrode                          | 6E       | 9HV              | 10.0 to 15.9           | 0.5 approx. at 12.6V   | Class A Amplifier  |
| 12EN6           | Beam Power Tube                              | 13D      | 7AC              | 12.6                   | 0.6                    | Vertical Deflection Amplifier  |
| 12EQ7           | Diode—Remote-Cutoff Pentode                  | 6E       | 9LQ              | 12.6                   | 0.15                   | Pentode Unit as Class A Amplifier  |
| 12F5GT          | High-Mu Triode                               | 14A      | 5M               | 12.6                   | 0.15                   | Amplifier  |
| 12F8            | Twin Diode—Remote-Cutoff Pentode             | 6B       | 9FH              | 10.0 to 15.9           | 0.15 approx. at 12.6V  | Pentode Unit as Class A Amplifier  |
| 12FK6           | Twin Diode—Low-Mu Triode                     | 5C       | 7BT              | 10.0 to 15.9           | 0.15 approx. at 12.6V  | Triode Unit as Class A Amplifier   |
| 12FM6           | Twin Diode—Medium-Mu Triode                  | 5C       | 7BT              | 10.0 to 15.9           | 0.15 approx. at 12.6V  | Triode Unit as Class A Amplifier   |
| 12FQ8           | High-Mu Twin Double-Plate Triode             | 6B       | 9KT              | 12.6                   | 0.15                   | Each Unit as Class A Amplifier   |
| 12FR8           | Diode—Medium-Mu Triode Remote-Cutoff Pentode | 6K       | 9KU              | 12.6                   | 0.32                   | Triode Unit as Class A Amplifier   |
| 12FV7           | Medium-Mu Twin Triode                        | 6E       | 9A               | 6.3 to 12.6            | 0.9 to 0.45            | Each Unit as Class A Amplifier   |
| 12FX8           | Medium-Mu Triode—Pentagrid Converter         | 6D       | 9KV              | 10.0 to 15.9           | 0.3 approx. at 12.6V   | Triode Unit as Class A Amplifier<br>Pentagrid Unit as Converter                                |
| 12FX8A          | Medium-Mu Triode-Pentagrid Converter         | 6D       | 9KV              | 10.0 to 15.9           | 0.27 approx. at 12.6V  | Triode Unit as Class A Amplifier<br>Pentagrid Unit as Converter                                |
| 12GA6           | Pentagrid Converter                          | 5C       | 7CH              | 10.0 to 15.9           | 0.15 approx. at 12.6V  | Converter  |
| 12GC6           | Beam Power Tube                              | 20A      | 8JX              | 12.6                   | 0.6                    | Horizontal Deflection Amplifier  |
| 12GJ5           | Beam Power Tube                              | 18A      | 9QK              | 12.6                   | 0.6                    | Horizontal Deflection Amplifier  |
| 12GN7<br>12GN7A | Sharp-Cutoff Pentode                         | 6E       | 9BF              | 6.3 to 12.6            | 0.6 to 0.3             | Class A Amplifier  |
| 12GT5<br>12GT5A | Beam Power Tube                              | 17B      | 9NZ              | 12.6                   | 0.6                    | Horizontal Deflection Amplifier  |
| 12H6            | Twin Diode                                   | 29B      | 7Q               | 12.6                   | 0.15                   | Voltage Doubler<br>Half-Wave Rectifier   |
| 12J5GT          | Medium-Mu Triode                             | 13D      | 6Q               | 12.6                   | 0.15                   | Amplifier  |
| 12J7GT          | Sharp-Cutoff Pentode                         | 14A      | 7R               | 12.6                   | 0.15                   | Amplifier  |
| 12J8            | Twin Diode—Power Tetrode                     | 6B       | 9GC              | 10.0 to 15.9           | 0.325 approx. at 12.6V | Tetrode Unit as Class A Amplifier  |
| 12JB6           | Beam Power Tube                              | 18A      | 9QL              | 12.6                   | 0.6                    | Horizontal-Deflection Amplifier<br>Triode Unit as Class A Amplifier                            |
| 12JN8           | Medium-Mu Triode—Sharp-Cutoff Pentode        | 6B       | 9FA              | 12.6                   | 0.225                  | Pentode Unit as Class A Amplifier  |
| 12JT6           | Beam Power Tube                              | 17C      | 9QU              | 12.6                   | 0.6                    | Horizontal Deflection Amplifier  |
| 12K5            | Power Tetrode                                | 5D       | 7EK              | 10.0 to 15.9           | 0.4 approx. at 12.6V   | Class A Amplifier  |
| 12K7GT          | Remote-Cutoff Pentode                        | 14A      | 7R               | 12.6                   | 0.15                   | Amplifier  |
| 12K8            | Triode-Hexode Converter                      | 3        | 8K               | 12.6                   | 0.15                   | Oscillator Mixer   |

| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor                       | Screen<br>Grid<br>Volts             | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms  | Trans-<br>conduc-<br>tance<br>Micromhos                          | Amplifi-<br>cation<br>Factor  | Power                     |                      | RCA<br>Type     |
|---|--|-------------------------------------|--------------------------------------|-----------------------------|--|--|---|---------------------------|----------------------|-----------------|
|   |  |                                     |                                      |                             |  |  |   | Load<br>Ohms              | Out-<br>put<br>Watts |                 |
| 12.6  | —  | 12.6                                | 1                                    | 6                           | 4000   | 5000   | Grid-No. 1 Res., 2.2 megohms  |                           | 12EM6                |                 |
| Max. Peak Pos.-Pulse Volts, 1200<br>Max. Peak Neg.-Pulse Grid Volts, 250<br>Max. Peak Cathode mA, 175   |  |                                     |                                      |                             |  |  | Max. Plate Dissipation, 7 watts<br>Max. DC Plate Volts, 300   |                           | 12EN6                |                 |
| For other characteristics, refer to Type 6EQ7   |  |                                     |                                      |                             |  |  |   |                           |                      | 12EQ7           |
| For other characteristics, refer to Type 6F5GT  |  |                                     |                                      |                             |  |  |   |                           |                      | 12F5GT          |
| 12.6  | 0V   | 12.6                                | 0.38                                 | 1                           | 330000   | 1000   | Grid-No. 1 Volts for trans-<br>cond. of 10 micromhos, —5  |                           | 12F8                 |                 |
| 12.6  | Grid Supply Volts, 0<br>Grid Res. (Bypassed),<br>2.2 megohms |                                     |                                      | 1.3                         | 6200   | 1200   | 7.4   | —                         | —                    | 12FK6           |
| 12.6  | 0V   | —                                   | —                                    | 1                           | 7700   | 1300   | 10  | —                         | —                    | 12FM6           |
| 250   | —1.5V  | —                                   | —                                    | 1.5                         | 76000  | 1250   | 95  | —                         | —                    | 12FQ8           |
| With plate not in use connected to ground.  |  |                                     |                                      |                             |  |  |   |                           |                      |                 |
| 12.6  | —0.8V  | 12.6                                | 0.7                                  | 1.9                         | 400000   | 2700   | —   | —                         | —                    | 12FR8           |
| 100   | —2V  | —                                   | —                                    | 16                          | 2250   | 9600   | 21.5  | —                         | —                    | 12FV7           |
| 12.6  | —  | —                                   | —                                    | 1.3                         | 7150   | 1400   | 10  | Grid Res.,<br>2.2 megohms |                      | 12FX8           |
| 12.6  | —  | 12.6                                | 1.25                                 | 0.29                        | 500000   | Grid No. 3 Res., 2.2 megohms<br>Conversion Transcond., 300 μmhos |   |                           |                      |                 |
| 12.6  | —0.8   | —                                   | —                                    | 1.3                         | 7150   | 1400   | 10  |                           |                      |                 |
| 12.6  | —0.5   | 12.6                                | 1.25                                 | 0.29                        | 500000   | Grid No. 3 Res., 2.2 megohms<br>Conversion Transcond., 300 μmhos |   |                           |                      | 12FX8A          |
| 12.6  | 1.6V   | 12.6                                | 0.8                                  | 0.3                         | 1 M  | Grid No. 1 Res., 33000 ohms<br>Conversion. Transcond., 140 μmhos |   |                           |                      | 12GA6           |
| Max. DC Plate Volts, 770<br>Max. DC Cathode mA, 175   |  |                                     |                                      |                             | Max. Peak Positive-Pulse Plate Volts, 6500<br>Max. Plate Dissipation 17.5 watts                |  |   |                           |                      | 12GC6           |
| For other characteristics, refer to Type 6GJ5   |  |                                     |                                      |                             |  |  |   |                           |                      | 12GJ5           |
| 50  | 0V   | 125                                 | 24                                   | 70                          | —  | —  | —   | —                         | —                    | 12GN7           |
| 250   | 0V   | 150                                 | 6.5                                  | 28                          | 50000  | 36000  | —   | —                         | —                    | 12GN7A          |
| Max. DC Plate Volts, 770<br>Max. DC Cathode mA, 175   |  |                                     |                                      |                             | Max. Peak Positive-Pulse Plate Volts, 6500<br>Max. Plate Dissipation, 17.5 watts               |  |   |                           |                      | 12GT5<br>12GT5A |
| Max. AC Supply Volts per Plate (RMS), 117<br>Min. Total Effect. Plate-Supply Imped. per Plate: half-wave, 30 ohms; full wave, 15 ohms<br>Max. AC Plate Volts (RMS), 150<br>Max. DC Output mA, 8 per Plate |  |                                     |                                      |                             |  |  | Max. DC Output mA, 8. min.<br>Min. Total Effective Plate-Supply Impedance: up<br>to 117 volts, 15 ohms; at 150 volts, 40 ohms |                           |                      | 12H6            |
| For other characteristics, refer to Type 6J5GT  |  |                                     |                                      |                             |  |  |   |                           |                      | 12J5GT          |
| For other characteristics, refer to Type 6J7GT  |  |                                     |                                      |                             |  |  |   |                           |                      | 12J7GT          |
| 12.6  | —0V  | 12.6                                | 1.5                                  | 12                          | 6000   | 5500   | —   | 2700                      | 0.02                 | 12J8            |
| For other ratings, refer to Type 6JB6   |  |                                     |                                      |                             |  |  |   |                           |                      | 12JB6           |
| 125   | —1V  | —                                   | —                                    | 13.5                        | 5400   | 8500   | 46  | —                         | —                    | 12JN8           |
| 125   | —1V  | 125                                 | 4                                    | 12                          | 200000   | 7500   | —   | —                         | —                    | 12JN8           |
| Max. DC Plate Supply Volts, 770<br>Max. DC Cathode Current mA, 175  |  |                                     |                                      |                             | Max. Peak Positive-Pulse Plate Volts, 6500<br>Max. Plate Dissipation, 17.5                     |  |   |                           |                      | 12JT6           |
| DC Plate Volts, 12.6  |  | Grid-No. 2 (Control Grid) Volts, —5 |                                      |                             | Plate Resistance, 480 ohms   |  |   |                           |                      | 12K5            |
| Grid-No. 1 (Space-Charge Grid) Volts, 12.6  |  | Grid-No. 1 mA, 75                   |                                      |                             | Amplification Factor, Grid-No. 2 to Plate, 7.2<br>Transcond., Grid-No. 2 to Plate, 15000 μmhos |  |   |                           |                      |                 |
| For other characteristics, refer to Type 6K7GT  |  |                                     |                                      |                             |  |  |   |                           |                      | 12K7GT          |
| For other characteristics, refer to Type 6K8  |  |                                     |                                      |                             |  |  |   |                           |                      | 12K8            |

| RCA Type             | Name   | Out-line  | Terminal Diagram | Heater or Filament (F) |                             | Use<br>Values to right give operating conditions and characteristics for indicated typical use   |
|----------------------|--|-----------|------------------|------------------------|-----------------------------|--|
|                      |  |           |                  | Volts                  | Amperes                     |  |
| 12KL8                | Diode—Sharp-Cutoff Pentode                   | 6E        | 9LQ              | 12.6                   | 0.15                        | Pentode Unit as Class A Amplifier  |
| 12L6GT               | Beam Power Tube                              | 13D       | 7AC              | 12.6                   | 0.6                         | Class A Amplifier  |
| 12Q7GT               | Twin Diode—High-Mu Triode                    | 14A       | 7V               | 12.6                   | 0.15                        | Triode Unit as Amplifier   |
| 12R5                 | Beam Power Tube                              | 5D        | 7CV              | 12.6                   | 0.6                         | Vertical Deflection Amplifier  |
| 12S8GT               | Triple Diode—High-Mu Triode                  | 14B       | 8CB              | 12.6                   | 0.15                        | Triode Unit as Class A Amplifier   |
| 12SA7<br>12SA7<br>GT | Pentagrid Converter                          | 2A<br>13D | 8R<br>8AD        | 12.6                   | 0.15                        | Converter  |
| 12SC7                | High-Mu Twin Triode                          | 2A        | 8S               | 12.6                   | 0.15                        | Each Unit as Class A Amplifier   |
| 12SF5<br>12SF5<br>GT | High-Mu Triode                               | 2A<br>13D | 6AB<br>6AB       | 12.6                   | 0.15                        | Class A Amplifier  |
| 12SF7                | Diode—Remote-Cutoff Pentode                  | 2A        | 7AZ              | 12.6                   | 0.15                        | Pentode Unit as Amplifier  |
| 12SG7                | Semiremote-Cutoff Pentode                    | 2A        | 8BK              | 12.6                   | 0.15                        | Class A Amplifier  |
| 12SH7                | Remote-Cutoff Pentode                        | 3         | 8BK              | 12.6                   | 0.15                        | Class A Amplifier  |
| 12SJ7<br>12SJ7<br>GT | Sharp-Cutoff Pentode                         | 2A<br>13D | 8N<br>8N         | 12.6                   | 0.15                        | Class A Amplifier  |
| 12SK7<br>12SK7<br>GT | Remote-Cutoff Pentode                        | 2A<br>13D | 8N<br>8N         | 12.6                   | 0.15                        | Class A Amplifier  |
| 12SN7<br>GT          | Medium-Mu Twin Triode                        | 13D       | 8BD              | 12.6                   | 0.3                         | Each Unit as Class A Amplifier   |
| 12SQ7<br>12SQ7<br>GT | Twin Diode—High-Mu Triode                    | 2A<br>13D | 8Q<br>8Q         | 12.6                   | 0.15                        | Triode Unit as Class A Amplifier   |
| 12SR7<br>12SR7<br>GT | Twin Diode—Medium-Mu Triode                  | 2A<br>13D | 8Q<br>8Q         | 12.6                   | 0.15                        | Triode Unit as Class A Amplifier   |
| 12SW7♦               | Twin Diode—Medium-Mu Triode                  | 2A        | 8Q               | 12.6                   | 0.15                        | Triode Unit as Class A Amplifier   |
| 12SY7♦               | Pentagrid Converter                          | 2A        | 8R               | 12.6                   | 0.15                        | Converter  |
| 12U7                 | Medium-Mu Twin Triode                        | 6B        | 7CK              | 10.0<br>to<br>15.9     | 0.15<br>approx.<br>at 12.6V | Each Unit as Class A Amplifier   |
| 12Z3                 | Half-Wave Rectifier                          | 22        | 4G               | 12.6                   | 0.3                         | With Capacitive-Input Filter   |
| 13EM7                | Dual Triode                                  | 13A       | 8BD              | 13                     | 0.45                        | Unit No. 1 as<br>Vertical Deflection Amplifier<br>Unit No. 2 as<br>Vertical Deflection Amplifier |
| 13GB5                | Beam Power Tube                              | 10E       | 9NH              | 13.3                   | 0.6                         | Horizontal Deflection Amplifier  |
| 13GF7                | Dual Triode                                  | 11A       | 9QD              | 13                     | 0.45                        | Vertical Deflection Amplifier<br>Vertical Deflection Oscillator                                  |
| 13J10                | Power Pentode<br>Gated-Beam<br>Discriminator | 8B        | 12BT             | 13.2                   | 0.45                        | Pentode Unit as Class A<br>Amplifier<br>Beam Unit as<br>Gated-Beam Discriminator                 |
| 13Z10                | Power Pentode<br>Gated-Beam<br>Discriminator | 8C        | 12BT             | 13.2                   | 0.45                        | Class A Amplifier  |
| 14A4                 | Medium-Mu Triode                             | 12B       | 5AC              | 12.6                   | 0.15                        | Class A Amplifier  |
| 14A5                 | Beam Power Tube                              | 12B       | 6AA              | 12.6                   | 0.15                        | Class A Amplifier  |

♦ Industrial Type



| Plate<br>Volts                                     | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms               | Trans-<br>conduct-<br>ance<br>Micromhos | Amplifi-<br>cation<br>Factor | Power        |                      | RCA<br>Type |
|--|--|-------------------------|--------------------------------------|-----------------------------|---|---|------------------------------|--------------|----------------------|-------------|
|  |  |                         |                                      |                             |   |   |                              | Load<br>Ohms | Out-<br>put<br>Watts |             |
| For other characteristics, see Type 6KL8           |  |                         |                                      |                             |   |   |                              |              |                      | 12KL8       |
| 110  | — 7.5V                                 | 110                     | 4.0                                  | 49                          | 13000   | 8000                                    | —                            | 2000         | 2.1                  | 12L6GT      |
| 200  | 180Ω                                   | 125                     | 2.2                                  | 46                          | 28000   | 8000                                    | —                            | 4000         | 3.8                  | 12L6GT      |
| For other characteristics, refer to Type 6Q7GT     |  |                         |                                      |                             |   |   |                              |              |                      | 12Q7GT      |
| Max. DC Plate Volts, 150                           |  |                         |                                      |                             | Max. Peak Neg.-Pulse Grid-No. 1 Volts, 150        |   |                              |              |                      | 12R5        |
| Max. Peak Cathode mA, 155                          |  |                         |                                      |                             | Max. Grid-No. 2 Volts, 150                        |   |                              |              |                      |             |
| Max. Plate Dissipation, 4.5 watts                  |  |                         |                                      |                             | Max. Peak Positive-Pulse Plate Volts, 1500 (Abs.) |   |                              |              |                      |             |
| 250  | — 2V                                   | —                       | —                                    | 0.9                         | 91000   | 1100                                    | 100                          | —            | —                    | 12S8GT      |
| For other characteristics, refer to Type 6SA7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SA7       |
| For other characteristics, refer to Type 6SA7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SA7<br>GT |
| For other characteristics, refer to Type 6SC7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SC7       |
| For other characteristics, refer to Type 6SF5      |  |                         |                                      |                             |   |   |                              |              |                      | 12SF5       |
| For other characteristics, refer to Type 6SF5      |  |                         |                                      |                             |   |   |                              |              |                      | 12SF5<br>GT |
| For other characteristics, refer to Type 6SF7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SF7       |
| For other characteristics, refer to Type 6SG7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SG7       |
| For other characteristics, refer to Type 6SH7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SH7       |
| For other characteristics, refer to Type 6SJ7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SJ7       |
| For other characteristics, refer to Type 6SJ7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SJ7<br>GT |
| For other characteristics, refer to Type 6SK7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SK7       |
| For other characteristics, refer to Type 6SK7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SK7<br>GT |
| For other characteristics, refer to Type 6J5       |  |                         |                                      |                             |   |   |                              |              |                      | 12SN7       |
| For other characteristics, refer to Type 6J5       |  |                         |                                      |                             |   |   |                              |              |                      | 12SN7<br>GT |
| For other characteristics, refer to Type 6SQ7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SQ7       |
| For other characteristics, refer to Type 6SQ7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SQ7<br>GT |
| For other characteristics, refer to Type 6SR7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SR7       |
| For other characteristics, refer to Type 6SR7      |  |                         |                                      |                             |   |   |                              |              |                      | 12SR7<br>GT |
| 250  | —9V                                    | —                       | —                                    | 9.5                         | 8500  | 1900                                    | 16                           | —            | —                    | 12SW7*      |
| 250  | Self<br>excited                        | 100                     | 8.5                                  | 3.5                         | 1M  | 450                                     | Grid-No.1 resistor = 20000Ω  |              |                      | 12SY7*      |
| 12.6   | 0V                                     | —                       | —                                    | 1                           | 12500   | 1600                                    | 20                           | —            | —                    | 12U7        |
| Max. DC Output mA,55                               |  |                         |                                      |                             |   |   |                              |              |                      | 12Z3        |
| Max. DC Plate Volts, 330                           |  |                         |                                      |                             | Max. Plate Dissipation, 1.5 watts                 |   |                              |              |                      | 13EM7       |
| Max. DC Cathode mA, 22                             |  |                         |                                      |                             | Max. Peak Positive-Pulse Plate Volts, 1500        |   |                              |              |                      |             |
| Max. DC Plate Volts, 330                           |  |                         |                                      |                             | Max. Plate Dissipation, 10 watts                  |   |                              |              |                      |             |
| For other ratings, refer to Type 6GB5              |  |                         |                                      |                             |   |   |                              |              |                      | 13GB5       |
| For other ratings, refer to Type 6GF7              |  |                         |                                      |                             |   |   |                              |              |                      | 13GF7       |
| 250  | — 8V                                   | 250                     | 2.5                                  | 35                          | 100000  | 6500                                    | —                            | 5000         | 4.2                  | 13J10       |
| Max. Supply Volts, 330                             |  |                         |                                      |                             | Max. Peak Positive Grid-No. 1 Volts, 60           |   |                              |              |                      | 13J10       |
| Max. Grid-No. 2 Volts, 110                         |  |                         |                                      |                             | Max. DC Cathode mA, 13                            |   |                              |              |                      |             |
| For other characteristics, refer to Type 6Z10/6J10 |  |                         |                                      |                             |   |   |                              |              |                      | 13Z10       |
| For other characteristics, refer to Type 6J5       |  |                         |                                      |                             |   |   |                              |              |                      | 14A4        |
| 250  | —12.5V                                 | 250                     | 5.5                                  | 32                          | 70000   | 3000                                    | —                            | 7500         | 2.8                  | 14A5        |

| RCA Type                    | Name   | Out-line | Terminal Diagram | Heater or Filament (F) |         | Use<br>Values to right give operating conditions and characteristics for indicated typical use                |
|-----------------------------|--|----------|------------------|------------------------|---------|---|
|                             |  |          |                  | Volts                  | Amperes |   |
| 14A7                        | Remote-Cutoff Pentode                                      | 12B      | 8V               | 12.6                   | 0.15    | Class A Amplifier   |
| 14AF7                       | Medium-Mu Twin-Triode                                      | 12B      | 8AC              | 12.6                   | 0.15    | Each Unit as Class A Amplifier  |
| 14B6                        | Twin Diode—High-Mu Triode                                  | 12B      | 8W               | 12.6                   | 0.15    | Triode Unit as Class A Amplifier  |
| 14B8                        | Pentagrid Converter  | 12B      | 8X               | 12.6                   | 0.15    | Converter   |
| 14C5                        | Beam Power Tube  | 12C      | 6AA              | 12.6                   | 0.225   | Class A Amplifier   |
| 14C7                        | Sharp-Cutoff Pentode                                       | 12B      | 8V               | 12.6                   | 0.15    | Class A Amplifier   |
| 14E6                        | Twin Diode—Medium-Mu Triode                                | 12B      | 8W               | 12.6                   | 0.15    | Triode Unit as Class A Amplifier  |
| 14E7                        | Twin Diode—Remote-Cutoff Pentode                           | 12B      | 8AE              | 12.6                   | 0.15    | Pentode Unit as Class A Amplifier   |
| 14F7                        | High-Mu Twin Triode  | 12B      | 8AC              | 12.6                   | 0.15    | Each Unit as Class A Amplifier  |
| 14F8                        | Medium-Mu Twin Triode                                      | 12A      | 8BW              | 12.6                   | 0.15    | Each Unit as Class A Amplifier  |
| 14GT8                       | Twin Diode High-Mu Triode                                  | 6B       | 9KR              | 14                     | 0.15    | Triode Unit as Class A Amplifier  |
| 14H7                        | Semiremote-Cutoff Pentode                                  | 12B      | 8V               | 12.6                   | 0.15    | Class A Amplifier   |
| 14J7                        | Triode-Heptode Converter                                   | 12B      | 8BL              | 12.6                   | 0.15    | Converter   |
| 14JG8                       | Twin Diode—High-Mu Triode                                  | 8B       | 9KR              | 14                     | 0.15    | Triode Unit as Class A Amplifier  |
| 14N7                        | Medium-Mu Twin Triode                                      | 12C      | 8AC              | 12.6                   | 0.3     | Each Unit as Class A Amplifier  |
| 14Q7                        | Pentagrid Converter  | 12B      | 8AL              | 12.6                   | 0.15    | Converter   |
| 14R7                        | Twin Diode—Remote-Cutoff Pentode                           | 12B      | 8AE              | 12.6                   | 0.15    | Pentode Unit as Class A Amplifier   |
| 15                          | Sharp-Cutoff Pentode                                       | 24B      | 5F               | 2.0                    | 0.22    | Class A Amplifier   |
| 15BD11                      | Dual Triode—   | 8B       | 12DP             | 14.7                   | 0.45    | Dual Triode Unit as Class A Amplifier   |
| 15BD11A                     | Sharp-Cutoff Pentode                                       |          |                  |                        |         | Pentode Unit as Class A Amplifier   |
| 15CW5                       | Power Pentode  | 6G       | 9CV              | 15                     | 0.3     | Vertical Deflection Amplifier   |
| 15DQ8                       | High-Mu Triode Sharp-Cutoff Pentode                        | 8E       | 9HX              | 15                     | 0.3     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier   |
| 15FM7                       | Dual Triode  | 8C       | 12EJ             | 14.8                   | 0.45    | Vertical Deflection Oscillator and Amplifier  |
| 15HB6                       | Power Pentode  | 6G       | 9NW              | 14.7                   | 0.3     | Vertical Deflection Amplifier   |
| 15KY8                       | High-Mu Triode—Beam Power Tube                             | 11C      | 9QT              | 15                     | 0.45    | Triode Unit as Oscillator<br>Beam Power Unit as Amplifier   |
| 15LE8                       | Twin Pentode   | 6G       | 9QZ              | 15                     | 0.8     | Class A Amplifier   |
| 16A8                        | High-Mu Triode—Power Pentode                               | 6G       | 9EX              | 16                     | 0.3     | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier   |
| 16AQ3                       | Diode  | 7D       | 9CB              | 16.4                   | 0.6     |   |
| 16BX11                      | High-Mu Triode<br>Medium-Mu Triode<br>Sharp-Cutoff Pentode | 8B       | 12CA             | 16                     | 0.315   | Triode Unit 1 as Class A Amplifier<br>Triode Unit 2 as Class A Amplifier<br>Pentode Unit as Class A Amplifier |
| 16KA6                       | Beam Power Tube  | 16A      | 12GH             | 15.8                   | 0.6     | Horizontal Deflection Amplifier   |
| 17AB10<br>17AB10/<br>17AX10 | Power Pentode<br>Gated-Beam Discriminator                  | 8C       | 12BT             | 16.8                   | 0.45    | Pentode Unit as Class A Amplifier<br>Beam Unit<br>Gated-Beam Discriminator                                    |
| 17AX4<br>GT                 | Half-Wave Rectifier  | 13D      | 4CG              | 16.8                   | 0.45    | Television Damper Service   |
| 17AY3                       | Half-Wave Rectifier  | 11D      | 9HP              | 16.8                   | 0.45    | Television Damper Service   |
| 17BB14                      | Beam Pentode   | 35B      | 9NH              | 16.8                   | 0.45    | Class A Amplifier   |

| Plate<br>Volts                                  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms          | Trans-<br>conduct-<br>ance<br>Micromhos | Amplifi-<br>cation<br>Factor | Power        |                      | RCA<br>Type                   |
|---|--|-------------------------|--------------------------------------|-----------------------------|--|---|------------------------------|--------------|----------------------|-------------------------------|
|   |  |                         |                                      |                             |  |   |                              | Load<br>Ohms | Out-<br>put<br>Watts |                               |
| 100<br>250                                      | — 1V<br>— 3V                           | 100<br>100              | 4.0<br>2.6                           | 13.0<br>9.2                 | 120000<br>800000                             | 2350<br>2000                            | —                            | —            | —                    | 14A7<br>14AF7<br>14B6<br>14B8 |
| For other characteristics, refer to Type 7AF7   |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| For other characteristics, refer to Type 6SQ7   |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| For other characteristics, refer to Type 6A8    |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| 315   | —13V                                   | 225                     | 2.2                                  | 34.0                        | 80000  | 3750                                    | —                            | 8500         | 5.5                  | 14C5<br>14C7<br>14E6          |
| For other characteristics, refer to Type 6SJ7   |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| For other characteristics, refer to Type 6BF6   |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| 250   | 330Ω                                   | 100                     | 1.6                                  | 7.5                         | 700000                                       | 1300                                    | —                            | —            | —                    | 14E7<br>14F7                  |
| For other characteristics, refer to Type 6SL7GT |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| 250   | 500Ω                                   | —                       | —                                    | 6.0                         | —  | 3300                                    | 48                           | —            | —                    | 14F8                          |
| 250   | —3V                                    | —                       | —                                    | 0.7                         | 72000  | 1000                                    | 72                           | —            | —                    | 14GT8<br>14H7<br>14J7         |
| For other characteristics, refer to Type 7H7    |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| For other characteristics, refer to Type 7J7    |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| 250   | — 2V                                   | —                       | —                                    | 2                           | 41000  | 2200                                    | 90                           | —            | —                    | 14JG8<br>14N7<br>14Q7<br>14R7 |
| For other characteristics, refer to Type 6SN7GT |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| For other characteristics, refer to Type 6SA7   |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| For other characteristics, refer to Type 7R7    |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| 135   | — 1.5V                                 | 67.5                    | 0.3                                  | 1.85                        | 800000                                       | 750                                     | —                            | —            | —                    | 15                            |
| 200<br>200                                      | —<br>220Ω                              | —<br>—                  | —<br>—                               | 7<br>9.2                    | 12400<br>9400                                | 5500<br>4400                            | 68<br>41                     | —<br>—       | —<br>—               | 15BD11<br>15BD11A             |
| 135   | 100                                    | 135                     | 4                                    | 17                          | 45000  | 10400                                   | —                            | —            | —                    | 15CW5                         |
| For other ratings, refer to Type 6CW5           |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| 200   | — 1.7                                  | —                       | —                                    | 3                           | —  | 4000                                    | 65                           | —            | —                    | 15DQ8                         |
| 200   | — 3.4                                  | 220                     | 3                                    | 18                          | 150000                                       | 10000                                   | —                            | —            | —                    | 15FM7                         |
| For other characteristics, refer to Type 6FM7   |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| Max. DC Plate Volts, 350                        |  |                         |                                      |                             | Max. Plate Dissipation, 10 watts             |   |                              |              |                      | 15HB6                         |
| Max. Peak Positive-Pulse Plate Volts, 2500      |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| For other ratings, refer to Type 6KY8           |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| For other characteristics, refer to Type 6LE8   |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| 100   | 0                                      | —                       | —                                    | 3.5                         | —  | 2500                                    | 70                           | —            | —                    | 15LE8                         |
| 200   | —16                                    | 200                     | 7                                    | 35                          | 20000  | 6400                                    | —                            | —            | —                    | 16A8                          |
| Max. Supply Volts, 250                          |  |                         |                                      |                             | Max. Peak Negative-Pulse Plate Volts, — 6000 |   |                              |              |                      | 16AQ3                         |
| Max. DC Plate mA, 220                           |  |                         |                                      |                             | Max. Plate Dissipation, 5 watts              |   |                              |              |                      |                               |
| 150   | 150Ω                                   | —                       | —                                    | 11                          | 6800   | 6200                                    | 42                           | —            | —                    | 16BX11                        |
| 150   | 150Ω                                   | —                       | —                                    | 7.6                         | 8400   | 6800                                    | 57                           | —            | —                    |                               |
| 125<br>35                                       | 56Ω<br>0V                              | 125<br>125              | 3.8<br>9.2                           | 12<br>20                    | 100000                                       | 11300                                   | —                            | —            | —                    |                               |
| Instantaneous Plate Knee characteristic         |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| For other characteristics, refer to Type 21KA6  |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| 145   | —6V                                    | 110                     | 3                                    | 36                          | 30000  | 8600                                    | —                            | 3000         | 2.4                  | 16KA6<br>17AB10<br>17AX10     |
| Max. Supply Volts, 330                          |  |                         |                                      |                             | Max. Peak Positive Grid No. 1 Volts, 60      |   |                              |              |                      |                               |
| Max. Grid No. 2 Volts, 330                      |  |                         |                                      |                             | Max. DC Cathode mA, 13                       |   |                              |              |                      |                               |
| Max. Peak Inverse Plate Volts, 4400             |  |                         |                                      |                             | Max. Peak Heater-Cathode Volts: { —4000      |   |                              |              |                      | 17AX4                         |
| Max. Peak Plate mA, 750                         |  |                         |                                      |                             | +300   |   |                              |              |                      | GT                            |
| Max. DC Plate mA, 125                           |  |                         |                                      |                             | DC component must not exceed 900 volts       |   |                              |              |                      |                               |
| For other ratings, refer to Type 6AY3           |  |                         |                                      |                             |  |   |                              |              |                      |                               |
| 100   | —7.7V                                  | 100                     | 7                                    | 100                         | 5300   | 14000                                   | —                            | —            | —                    | 17AY3<br>17BB14               |

| RCA Type              | Name                                    | Out-line     | Terminal Dia-gram | Heater or Filament (F) |         | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|-----------------------|---|--------------|-------------------|------------------------|---------|--|
|                       |   |              |                   | Volts                  | Amperes |  |
| 17BH3<br>17BH3A       | Half-Wave Rectifier                     | 11D          | 9HP               | 17                     | 0.6     | Television Damper Service  |
| 17BQ6GTB              | Beam Power Tube                         | 14D          | 6AM               | 16.8                   | 0.45    | Horizontal Deflection Amplifier  |
| 17BR3                 | Half-Wave Rectifier                     | 7D           | 9CB               | 16.8                   | 0.45    | Television Damper Service  |
| 17BS3                 | Half-Wave Rectifier                     | 11D          | 9HP               | 16.8                   | 0.45    | Television Damper Service  |
| 17BZ3                 | Half-Wave Rectifier                     | 8D           | 12FX              | 16.8                   | 0.45    | Television Damper Service  |
| 17CK3                 | Half-Wave Rectifier                     | 30B          | 9HP               | 16.8                   | 0.45    | Television Damper Service  |
| 17D4                  | Half-Wave Rectifier                     | 13D          | 4CG               | 16.8                   | 0.45    | Television Damper Service  |
| 17DM4                 | Half-Wave Rectifier                     | 13G          | 4CG               | 16.8                   | 0.45    | Television Damper Service  |
| 17DQ6A                | Beam Power Tube                         | 20           | 6AM               | 16.8                   | 0.45    | Horizontal Deflection Amplifier  |
| 17DW4A                | Half-Wave Rectifier                     | 11D          | 9HP               | 16.8                   | 0.45    | Television Damper Service  |
| 17EW8                 | High-Mu Twin Triode                     | 6B           | 9AJ               | 17.5                   | 0.15    | Each Unit as Class A Amplifier   |
| 17GJ5                 | Novar-Beam Power Tube                   | 18A          | 9QK               | 16.8                   | 0.45    | Horizontal Deflection Amplifier  |
| 17GT5                 | Beam Power Tube                         | 17B          | 9NZ               | 16.8                   | 0.45    | Horizontal Deflection Amplifier  |
| 17H3                  | Half-Wave Rectifier                     | 6E           | 9FK               | 17.5                   | 0.3     | Television Damper Service  |
| 17HB25                | Beam Pentode                            | 35           | 17HB25            | 16.8                   | 0.45    | Horizontal Deflection Amplifier  |
| 17JB6                 | Beam Power Tube                         | 18A          | 9QL               | 16.8                   | 0.45    | Horizontal Deflection Amplifier  |
| 17JG6                 | Beam Power Tube                         | 17B          | 9QU               | 16.8                   | 0.6     | Horizontal Deflection Amplifier  |
| 17JT6                 | Beam Power Tube                         | 17C          | 9QU               | 16.8                   | 0.45    | Horizontal Deflection Amplifier  |
| 17KV6                 | Beam Power Tube                         | 31D          | 9QU               | 16.8                   | 0.6     | High-Voltage-Pulse<br>Shunt Regulator  |
| 17LD8                 | Medium-Mu Triode—Sharp-Cutoff Pentode   | 10F          | 9QT               | 16.8                   | 0.45    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 17X10                 | Pentode—Beam Power Tube                 | 8C           | 12BT              | 16.8                   | 0.45    | Beam Power Unit as Class A Amplifier   |
| 17Z3/<br>PY81         | Half-Wave Rectifier                     | 7H           | 9CB               | 17                     | 0.3     | Television Damper Service  |
| 18A5                  | Beam Power Tube                         | 13F          | 6CK               | 18.5                   | 0.3     | Horizontal Deflection Amplifier  |
| 18AJ10                | Beam Power Tube<br>Sharp-Cutoff Pentode | 8C           | 12EZ              | 18                     | 0.315   | Beam Unit as Class A Amplifier<br>Pentode Unit as FM Detector                                  |
| 18FW6<br>18FW6A       | Remote-Cutoff Pentode                   | 5C           | 7CC               | 18.0                   | 0.1     | Class A Amplifier  |
| 18FX6<br>18FX6A       | Pentagrid Converter                     | 5C           | 7CH               | 18.0                   | 0.1     | Converter  |
| 18FY6<br>18FY6A       | Twin Diode—High-Mu Triode               | 5C           | 7BT               | 18.0                   | 0.1     | Triode Unit as Class A Amplifier   |
| 18GB5                 | Beam Power Tube                         | 35B          | 9NH               | 18                     | 0.45    | Horizontal Deflection Amplifier  |
| 18GD6A                | Sharp-Cutoff Pentode                    | 5C           | 7BK               | 18                     | 0.1     | Class A Amplifier  |
| 19                    | High-Mu Twin Power Triode               | 22 or<br>13H | 6C                | 2.0F                   | 0.26    | Amplifier  |
| 19AU4<br>19AU4<br>GTA | Half-Wave Rectifier                     | 13G          | 4CG               | 18.9                   | 0.6     | Television Damper Service  |
| 19BG6G<br>19BG6<br>GA | Beam Power Tube                         | 27B          | 5BT               | 18.9                   | 0.3     | Horizontal Deflection Amplifier  |

| Plate<br>Volts   | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>cond-<br>uctance<br>Micromhos | Amplifi-<br>cation<br>Factor | Power   |                      | RCA<br>Type   |  |       |
|--|--|-------------------------|--------------------------------------|-----------------------------|-------------------------------------|---|------------------------------|---|----------------------|---|--|-------|
|  |  |                         |                                      |                             |                                     |   |                              | Load<br>Ohms  | Out-<br>put<br>Watts |   |  |       |
| For other ratings, refer to Type 6BH3                                      |  |                         |                                      |                             |                                     |   |                              |   |                      | 17BH3   |  |       |
| For other characteristics, refer to Type 6BQ6GTB/6CU6                      |  |                         |                                      |                             |                                     |   |                              |   |                      | 17BH3A  |  |       |
| Max. Peak Inverse Plate Volts, 5500<br>Max. Peak Plate mA, 1200            |  |                         |                                      |                             |                                     |   |                              |   |                      | Max. DC Plate mA, 200<br>Max. Plate Dissipation, 6.5 watts                            | Max. Peak Heater<br>Cathode Volts: { +300<br>-5500 | 17BR3 |
| For other ratings, refer to Type 6BS3                                      |  |                         |                                      |                             |                                     |   |                              |   |                      | 17BS3   |  |       |
| Max. Peak Inverse Plate Volts, 4500<br>Max. Peak Plate mA, 1200            |  |                         |                                      |                             |                                     |   |                              |   |                      | Max. Plate Dissipation, 6.5 watts<br>Max. Peak Heater Cathode Volts: { -4500<br>+900  | 17BZ3  |       |
| For other characteristics, refer to Type 6CK3                              |  |                         |                                      |                             |                                     |   |                              |   |                      | 17CK3   |  |       |
| For other characteristics, refer to Type 12D4                              |  |                         |                                      |                             |                                     |   |                              |   |                      | 17D4  |  |       |
| For other ratings, refer to Type 6DM4                                      |  |                         |                                      |                             |                                     |   |                              |   |                      | 17DM4   |  |       |
| Max. DC Plate Volts, 700<br>Max. DC Cathode mA, 140                        |  |                         |                                      |                             |                                     |   |                              |   |                      | Max. Peak Positive-Pulse Plate Volts, 6000 (Abs.)<br>Max. Plate Dissipation, 15 watts | 17DQ6A   |       |
| For other characteristics, refer to Type 6DW4A                             |  |                         |                                      |                             |                                     |   |                              |   |                      | 17DW4A  |  |       |
| 100  | — 1.1V                                 | —                       | —                                    | 10                          | —                                   | 4600                                    | 50                           | —   | —                    | 17EW8   |  |       |
| 200  | — 2.1V                                 | —                       | —                                    | 4.5                         | —                                   | 5800                                    | 48                           | —   | —                    | 17EW8   |  |       |
| For other ratings, refer to Type 6GJ5                                      |  |                         |                                      |                             |                                     |   |                              |   |                      | 17GJ5   |  |       |
| For other ratings, refer to Type 6GT5                                      |  |                         |                                      |                             |                                     |   |                              |   |                      | 17GT5   |  |       |
| Max. Peak Inverse Plate Volts, 2000<br>Max. Peak Plate mA, 450             |  |                         |                                      |                             |                                     |   |                              |   |                      | Max. Average Plate mA, 75<br>Max. Plate Dissipation, 3 watts                          | 17H3   |       |
| Max. Peak Positive-Pulse Plate Volts, 7000<br>Max. Average Cathode mA, 150 |  |                         |                                      |                             |                                     |   |                              |   |                      | Max. Plate Dissipation, 13 Watts  | 17HB25   |       |
| For other ratings, refer to Type 6JB6                                      |  |                         |                                      |                             |                                     |   |                              |   |                      | 17JB6   |  |       |
| For other characteristics, refer to Type 17JG6A                            |  |                         |                                      |                             |                                     |   |                              |   |                      | 17JG6   |  |       |
| For other ratings, refer to Type 6JT6                                      |  |                         |                                      |                             |                                     |   |                              |   |                      | 17JT6   |  |       |
| For other characteristics, refer to Type 6KV6A                             |  |                         |                                      |                             |                                     |   |                              |   |                      | 17KV6   |  |       |
| 150  | — 5V                                   | —                       | —                                    | 3.3                         | 11300                               | 1900                                    | 21.5                         | —   | —                    | 17LD8   |  |       |
| 120  | — 8V                                   | 110                     | 4                                    | 46                          | 11700                               | 7100                                    | —                            | —   | —                    | 17LD8   |  |       |
| 145  | — 6V                                   | 110                     | 3                                    | 36                          | 30000                               | 8600                                    | —                            | 3000  | —                    | 17X10   |  |       |
| Max. Peak Inverse Plate Volts, 5000<br>Max. Peak Plate mA, 450             |  |                         |                                      |                             |                                     |   |                              |   |                      | Max. Average Plate mA, 150<br>Max. Heater-Cathode Volts, +220, -4500                  | 17Z3/<br>PY81                                      |       |
| Max. DC Plate Volts, 350<br>Max. DC Cathode mA, 90                         |  |                         |                                      |                             |                                     |   |                              |   |                      | Max. Peak Pos.-Pulse Plate Volts 3000<br>Max. Plate Dissipation, 9 watts              | 18A5   |       |
| 145  | —7V                                    | 110                     | 6.5                                  | 34                          | 33000                               | 5600                                    | —                            | 2500  | 1.45                 | 18AJ10  |  |       |
| 150  | 180Ω                                   | 100                     | 3.5                                  | 2.8                         | 180000                              | 2400                                    | —                            | Grid No. 3 Volts, 0   | —                    | 18AJ10  |  |       |
| 100  | 68Ω                                    | 100                     | 4.4                                  | 11                          | 250000                              | 4400                                    | —                            | —   | —                    | 18FW6<br>18FW6A   |  |       |
| 100  | — 1.5V                                 | 100                     | 6.2                                  | 2.3                         | 400000                              | —                                       | —                            | Grid No. 1 Resistor, 20000 ohms<br>Conversion Transcond., 480 μmhos | —                    | 18FX6<br>18FX6A   |  |       |
| 100  | — 1V                                   | —                       | —                                    | 0.6                         | 77000                               | 1300                                    | 100                          | —   | —                    | 18FY6<br>18FY6A   |  |       |
| For other characteristics, refer to Type 6GB5/EL500                        |  |                         |                                      |                             |                                     |   |                              |   |                      | 18GB5   |  |       |
| 100  | 150Ω                                   | 100                     | 2                                    | 5                           | 500000                              | 4300                                    | —                            | —   | —                    | 18GD6A  |  |       |
| For other characteristics, refer to Type 1J6GT                             |  |                         |                                      |                             |                                     |   |                              |   |                      | 19  |  |       |
| For other ratings, refer to Type 6AU4GTA                                   |  |                         |                                      |                             |                                     |   |                              |   |                      | 19AU4<br>19AU4<br>GTA   |  |       |
| Max. DC Plate Volts, 700<br>Max. DC Plate Current, 110 mA.                 |  |                         |                                      |                             |                                     |   |                              |   |                      | Max. Peak Positive-Pulse Plate Volts, 6600 (Abs.)<br>Max. Plate Dissipation, 20 watts | 19BG6G<br>19BG6<br>GA                              |       |

| RCA<br>Type | Name   | Out-<br>line | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |         | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|-------------|--|--------------|--------------------------|---------------------------|---------|--|
|             |  |              |                          | Volts                     | Amperes |  |
|             |  |              |                          |                           |         |  |
| 19CL8A      | Medium-Mu Triode—<br>Sharp-Cutoff Tetrode      | 6B           | 9FX                      | 18.9                      | 0.15    | Triode Unit as Class A Amplifier   |
|             |  |              |                          |                           |         | Tetrode Unit as Class A Amplifier  |
|             |  |              |                          |                           |         | Pentode Unit as  |
| 19DE3       | Half-Wave Rectifier                            | 9D           | 12HX                     | 19                        | 0.6     | Television Damper Service  |
| 19EZ8       | High-Mu Triple Triode                          | 6B           | 9KA                      | 18.9                      | 0.15    | Each Unit as<br>Class A Amplifier  |
| 19GQ7       | Triple Diode                                   | 6B           | 9QM                      | 18.9                      | 0.15    | Each Unit as Half-Wave Rectifier   |
| 19HR6       | Semiremote-Cutoff Pentode                      | 5C           | 7BK                      | 18.9                      | 0.15    | Class A Amplifier  |
| 19HS6       | Sharp-Cutoff Pentode                           | 5C           | 7BK                      | 18.4                      | 0.15    | Class A Amplifier  |
| 19HV8       | High-Mu Triode<br>Sharp-Cutoff Pentode         | 6B           | 9FA                      | 18.9                      | 0.15    | Triode Unit as Class A Amplifier   |
|             |  |              |                          |                           |         | Pentode Unit as Class A Amplifier  |
| 19J6        | Medium-Mu Twin Triode                          | 5C           | 7BF                      | 18.9                      | 0.15    | Each Unit as Class A Amplifier   |
| 19JN8       | Medium-Mu Triode—<br>Sharp-Cutoff Pentode      | 6B           | 9FA                      | 18.9                      | 0.15    | Triode Unit as Class A Amplifier   |
|             |  |              |                          |                           |         | Pentode Unit as<br>Class A Amplifier   |
| 19KG8       | Medium-Mu Triode<br>Sharp-Cutoff Pentode       | 6B           | 9LY                      | 18.9                      | 0.15    | Triode Unit as Class A Amplifier   |
|             |  |              |                          |                           |         | Pentode Unit as Class A Amplifier  |
| 19Q9        | Medium-Mu Triode—<br>Semiremote-Cutoff Pentode | 6B           | 10H                      | 18.9                      | 0.15    | Triode Unit as<br>Class A Amplifier<br>Pentode Unit as<br>Class A Amplifier                              |
| 19X8        | Medium-Mu Triode—<br>Sharp-Cutoff Pentode      | 6B           | 9AK                      | 18.4                      | 0.15    | Triode Unit as Class A Amplifier   |
|             |  |              |                          |                           |         | Pentode Unit as Class A<br>Amplifier   |
| 20          | Power Triode                                   |              | 4D                       | 3.3F                      | 0.132   | Class A Amplifier  |
| 20EQ7       | Diode—Remote-Cutoff Pentode                    | 6E           | 9LQ                      | 20.0                      | 0.1     | Pentode Unit as Class A<br>Amplifier   |
| 20EZ7       | High-Mu Twin Triode                            | 6B           | 9PG                      | 20                        | 0.1     | Each Unit as Class A Amplifier   |
| 21EX6       | Beam Power Tube                                | 21B          | 5BT                      | 21.5                      | 0.6     | Horizontal Deflection Amplifier  |
| 21HB5       | Beam Power Tube                                | 15B          | 12BJ                     | 21                        | 0.45    | Horizontal Deflection Amplifier  |
| 21HJ5       | Beam Power Tube                                | 15C          | 12FL                     | 21.5                      | 0.6     | Horizontal Deflection Amplifier  |
| 21JV6       | Beam Power Tube                                | 15B          | 12FK                     | 21                        | 0.45    | Horizontal Deflection Amplifier  |
| 21LG6       | Beam Power Tube                                | 16B          | 12HL                     | 21                        | 0.6     | Horizontal Deflection Amplifier  |
| 21MY8       | High-Mu Triode<br>Beam Power Tube              | 15D          | 12DZ                     | 21                        | 0.45    | Triode Unit as Class A Amplifier   |
|             |  |              |                          |                           |         | Beam Unit as Class A Amplifier   |
| 22          | Sharp-Cutoff Tetrode                           | 29K          | 4K                       | 3.3F                      | 0.132   | Screen-Grid RF Amplifier   |
| 22BH3       | Half-Wave Rectifier                            | 11D          | 9HP                      | 22.4                      | 0.45    | Television Damper Service  |
| 22BH3A      | Beam Power Tube                                | 17B          | 9QU                      | 22                        | 0.45    | Horizontal Deflection Amplifier  |
| 22JG6       | Beam Power Tube                                | 17B          | 9QU                      | 22                        | 0.45    | Horizontal Deflection Amplifier  |
| 24A         | Sharp-Cutoff Tetrode                           | 29K          | 5E                       | 2.5                       | 1.75    | Screen-Grid RF Amplifier   |
| 24JE6A      | Beam Power Tube                                | 32B          | 9QL                      | 24                        | 0.6     | Horizontal Deflection Amplifier  |
| 24LZ6       | Beam Power Tube                                | 18C          | 9QL                      | 24                        | 0.6     | Horizontal Deflection Amplifier  |
| 25A6        | Power Pentode                                  | 2B           | 7S                       | 25.0                      | 0.3     | Class A Amplifier  |
|             |  |              |                          |                           |         | 13D  |
| 25A7GT      | Rectifier—Power Pentode                        | 13D          | 8F                       | 25.0                      | 0.3     | Pentode Unit as Class A<br>Amplifier<br>Half-Wave Rectifier  |
| 25AC5<br>GT | High-Mu Power Triode                           | 13D          | 6Q                       | 25.0                      | 0.3     | Amplifier  |

| Plate<br>Volts                                  | Grid Bias<br>or<br>Cathode<br>Resistor           | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms        | Trans-<br>conduc-<br>tance<br>Micromhos | Amplifi-<br>cation<br>Factor | Power                                  |                      | RCA<br>Type |    |
|---|--|-------------------------|--------------------------------------|-----------------------------|--|---|------------------------------|--|----------------------|-------------|----|
|   |  |                         |                                      |                             |  |   |                              | Load<br>Ohms                           | Out-<br>put<br>Watts |             |    |
| 125   | — 1  | —                       | —                                    | 14                          | 5000                                       | 8000                                    | 40                           | —                                      | —                    | 19CL8A      |    |
| 125   | — 1  | 125                     | 4                                    | 12                          | 200000                                     | 6500                                    | —                            | —                                      | —                    |             |    |
| Max. Peak Inverse Plate Volts, 5000             |  |                         |                                      | Max. Average Plate mA, 350  |  |   |                              | Max. Heater-Cathode Volts, +300, —5000 |                      | 19DE3       |    |
| For other characteristics, refer to Type 6E28   |  |                         |                                      |                             |  |   |                              |  |                      | 19E28       |    |
| For other characteristics, refer to Type 6GQ7   |  |                         |                                      |                             |  |   |                              |  |                      | 19GQ7       |    |
| For other characteristics, refer to Type 6HR6   |  |                         |                                      |                             |  |   |                              |  |                      | 19HR6       |    |
| 75  | 0V   | 75                      | —                                    | —                           | —  | —                                       | 50                           | —                                      | —                    | 19HS6       |    |
| 150   | 0V   | 75                      | 2.8                                  | 8.8                         | 500000                                     | 9500                                    | —                            | —                                      | —                    |             |    |
| 100   | —1V  | —                       | —                                    | 0.8                         | 54000                                      | 1300                                    | 70                           | —                                      | —                    | 19HV8       |    |
| 125   | —1V  | 125                     | 4                                    | 12                          | 200000                                     | 6500                                    | —                            | —                                      | —                    |             |    |
| 100   | 50Ω (For both units at the specified conditions) |                         |                                      | 8.5                         | 7100                                       | 5300                                    | 38                           | —                                      | —                    | 19J6        |    |
| 125   | — 1  | —                       | —                                    | 13.5                        | 5400                                       | 8500                                    | 46                           | —                                      | —                    | 19JN8       |    |
| 125   | — 1  | 125                     | 4                                    | 12                          | 200000                                     | 7500                                    | —                            | —                                      | —                    |             |    |
| 125   | —1V  | —                       | —                                    | 13.5                        | 5400                                       | 8500                                    | 46                           | —                                      | —                    | 19KG8       |    |
| 125   | —1V  | 125                     | 4                                    | 12                          | 200000                                     | 7500                                    | —                            | —                                      | —                    |             |    |
| 125   | —1V  | —                       | —                                    | 14                          | 5000                                       | 8000                                    | 40                           | —                                      | —                    | 19Q9        |    |
| 125   | —1V  | 125                     | 4                                    | 12                          | 200000                                     | 6500                                    | —                            | —                                      | —                    |             |    |
| For other characteristics, refer to Type 6X8    |  |                         |                                      |                             |  |   |                              |  |                      | 19X8        |    |
| 135   | —22.5V   | —                       | —                                    | 6.5                         | 6300                                       | 525                                     | 3.3                          | 6500                                   | 0.110                | 20          |    |
| For other characteristics, refer to Type 6EQ7   |  |                         |                                      |                             |  |   |                              |  |                      | 20EQ7       |    |
| 250   | —2V  | —                       | —                                    | 1.2                         | 62500                                      | 1600                                    | 100                          | —                                      | —                    | 20E27       |    |
| For other ratings, refer to Type 6EX6           |  |                         |                                      |                             |  |   |                              |  |                      | 21EX6       |    |
| Max. DC Plate Supply Volts, 770                 |  |                         |                                      |                             | Max. DC Cathode mA, 230                    |   |                              |  |                      | 21HB5       |    |
| Max. Peak Positive-Pulse Plate Volts, 6000      |  |                         |                                      |                             | Max. Plate Dissipation, 18 watts           |   |                              |  |                      |             |    |
| Max. DC Plate Supply Volts, 770                 |  |                         |                                      |                             | Max. DC Cathode mA, 280                    |   |                              |  |                      | 21HJ5       |    |
| Max. Peak Positive-Pulse Plate Volts, 7000      |  |                         |                                      |                             | Max. Plate Dissipation, 24 watts           |   |                              |  |                      |             |    |
| Max. DC Plate Supply Volts, 770                 |  |                         |                                      |                             | Max. DC Cathode mA, 230                    |   |                              |  |                      | 21JV6       |    |
| Max. Peak Positive Pulse Plate Volts, 6000      |  |                         |                                      |                             | Max. Plate Dissipation, 18 watts           |   |                              |  |                      |             |    |
| Max. DC Plate Volts, 900                        |  |                         |                                      |                             | Max. Plate Dissipation, 28 Watts           |   |                              |  |                      | 21LG6       |    |
| Max. Average Cathode mA, 315                    |  |                         |                                      |                             | Max. Peak Positive-Pulse Plate Volts, 7500 |   |                              |  |                      |             |    |
| 250   | —4V  | —                       | —                                    | 2.3                         | 16000                                      | 3600                                    | 58                           | —                                      | —                    | 21MY8       |    |
| 135   | —10  | 120                     | 3                                    | 56                          | 12000                                      | 9300                                    | —                            | —                                      | —                    |             |    |
| 45  | 0V   | 125                     | 20                                   | 200                         | Instantaneous Plate Knee characteristic    |   |                              |  |                      |             |    |
| 135   | — 1.5V   | 67.5                    | 1.3 (Max.)                           | 3.7                         | 325000                                     | 500                                     | —                            | —                                      | —                    | 22          |    |
| For other ratings, refer to Type 6BH3           |  |                         |                                      |                             |  |   |                              |  |                      | 22BH3       |    |
| For other characteristics, refer to Type 22JG6A |  |                         |                                      |                             |  |   |                              |  |                      | 22BH3A      |    |
| For other characteristics, refer to Type 22JG6A |  |                         |                                      |                             |  |   |                              |  |                      | 22JG6       |    |
| 250   | — 3V   | 90                      | 1.7 (Max.)                           | 4.0                         | 600000                                     | 1050                                    | —                            | —                                      | —                    | 24A         |    |
| Max. DC Plate Volts, 990                        |  |                         |                                      |                             | Max. Peak Positive-Pulse Plate Volts, 7500 |   |                              |  |                      | 24JE6A      |    |
| Max. Average Cathode mA, 350                    |  |                         |                                      |                             | Max. Plate Dissipation, 30 Watts           |   |                              |  |                      |             |    |
| For other characteristics, refer to Type 31LZ6  |  |                         |                                      |                             |  |   |                              |  |                      | 24LZ6       |    |
| 95  | —15V   | 95                      | 4                                    | 20                          | 45000                                      | 2000                                    | —                            | 4500                                   | 0.9                  | 25A6        |    |
| For other characteristics, refer to Type 31LZ6  |  |                         |                                      |                             |  |   |                              |  |                      | 25A6GT      |    |
| 100   | —15V   | 100                     | 4.0                                  | 20.5                        | 50000                                      | 1800                                    | —                            | 4500                                   | 0.77                 | 25A7        |    |
| Max. AC Plate Volts (RMS), 117                  |  |                         |                                      | Max. DC Output mA, 75       |  |   | Max. Peak Plate mA, 450      |  |                      |             | GT |
| 110   | +15V (Grid mA, 7)                                | —                       | —                                    | 15                          | 15200                                      | 3800                                    | 58                           | —                                      | —                    | 25AC5       |    |
| For other characteristics, refer to Type 6X8    |  |                         |                                      |                             |  |   |                              |  |                      | GT          |    |

| RCA Type                    | Name                                 | Out-         | Basing Diagram | Heater or Filament (F) |            | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|-----------------------------|--------------------------------------|--------------|----------------|------------------------|------------|--|
|                             |                                      |              |                | Volts                  | Amperes    |  |
| 25AX4<br>GT                 | Half-Wave Rectifier                  | 13D          | 4CG            | 25                     | 0.3        | Television Damper Service  |
| 25B5                        | Direct-Coupled Power Amplifier       | —            | 6D             | 25.0                   | 0.3        | Amplifier  |
| 25B6G                       | Power Pentode                        | 25           | 7S             | 25.0                   | 0.3        | Class A Amplifier  |
| 25B8GT                      | High-Mu Triode—Remote-Cutoff Pentode | 13D          | 8T             | 25.0                   | 0.15       | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 25BK5                       | Beam Power Tube                      | 6E           | 9BQ            | 25                     | 0.3        | Class A Amplifier  |
| 25BQ6<br>GT                 | Beam Power Tube                      | 14D          | 6AM            | 25.0                   | 0.3        | Horizontal Deflection Amplifier  |
| 25C6G                       | Beam Power Tube                      | 25           | 7AC            | 25.0                   | 0.3        | Class A Amplifier  |
| 25CA5                       | Beam Power Tube                      | 5D           | 7CV            | 25                     | 0.3        | Class A Amplifier  |
| 25CD6<br>GA                 | Beam Power Tube                      | 21B          | 5BT            | 25                     | 0.6        | Horizontal Deflection Amplifier  |
| 25CK3                       | Half-Wave Rectifier                  | 30B          | 9HP            | 25.2                   | 0.3        | Television Damper Service  |
| 25CM3                       | Half-Wave Rectifier                  | 30B          | 9HP            | 25                     | 0.6        | Television Damper Service  |
| 25DN6                       | Beam Power Tube                      | 21           | 5BT            | 25                     | 0.6        | Horizontal Deflection Amplifier  |
| 25E5/<br>PL36               | Beam Power Tube                      | 14K          | 8GT            | 25                     | 0.3        | Horizontal Deflection Amplifier  |
| 25EC6                       | Beam Power Tube                      | 21A          | 5BT            | 25.0                   | 0.6        | Horizontal Deflection Amplifier  |
| 25F5A                       | Beam Power Tube                      | 5D           | 7CV            | 25                     | 0.15       | Class A Amplifier  |
| 25HX5                       | Beam Power Tube                      | 10F          | 9SB            | 25                     | 0.3        | Vertical Deflection Amplifier  |
| 25JQ6                       | Beam Power Tube with Integral Diode  | 6G           | 9RA            | 25.2                   | 0.3        | Vertical Deflection Amplifier  |
| 25L6                        | Beam Power Tube                      | 2B           | 7AC            | 25.0                   | 0.3        | Amplifier  |
| 25L6GT<br>25L6GT/<br>25W6GT | Beam Power Tube                      | 13D          | 7AC            | 25.0                   | 0.3        | Amplifier  |
| 25N6G                       | Direct-Coupled Power Amplifier       | —            | 7W             | 25.0                   | 0.3        | Class A Amplifier  |
| 25W4GT                      | Half-Wave Rectifier                  | 13D          | 4CG            | 25.0                   | 0.3        | Television Damper Service  |
| 25W6GT                      | Beam Power Tube                      | 13D          | 7AC            | 25                     | 0.3        | Class A Amplifier  |
| 25Y5                        | Rectifier-Doubler                    | 22 or<br>13H | 6E             | 25.0                   | 0.3        | Half-Wave Rectifier  |
| 25Z5                        | Rectifier-Doubler                    | 22 or<br>13H | 6E             | 25.0                   | 0.3        | Rectifier-Doubler  |
| 25Z6<br>25Z6GT              | Rectifier-Doubler                    | 2B<br>13D    | 7Q<br>7Q       | 25.0<br>25.0           | 0.3<br>0.3 | Voltage Doubler<br>Half-Wave Rectifier   |
| 26                          | Medium-Mu Triode                     | 26           | 4D             | 1.5F                   | 1.05       | Class A Amplifier  |
| 26A6♦                       | Remote-Cutoff Pentode                | 5C           | 7BK            | 26.5                   | 0.07       | Class A Amplifier  |
| 26A7GT♦                     | Twin Power Pentode                   | 13G          | 8BU            | 26.5                   | 0.6        | Class A Amplifier  |
| 26C6♦                       | Twin Diode—Medium-Mu Triode          | 5C           | 7BT            | 26.5                   | 0.07       | Triode Unit as Class A Amplifier   |
| 26D6♦                       | Pentagrid Converter                  | 5C           | 7CH            | 26.5                   | 0.07       | Converter  |
| 26LW6                       | Beam Power Tube                      | 29N          | 8NC            | 26                     | 0.6        | Horizontal Deflection Amplifier  |

♦ Industrial Type



| Plate<br>Volts  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms  | Trans-<br>conduct-<br>ance<br>Micromhos | Amplifi-<br>cation<br>Factor | Power |                      | RCA<br>Type                 |
|---|--|-------------------------|--------------------------------------|-----------------------------|--|---|------------------------------|-------|----------------------|-----------------------------|
|   |  |                         |                                      |                             |  |   |                              | Ohms  | Out-<br>put<br>Watts |                             |
| For other characteristics, refer to Type 6AX4GTB  |  |                         |                                      |                             |  |   |                              |       |                      | 25AX4<br>GT                 |
| For other characteristics, refer to Type 25N6G  |  |                         |                                      |                             |  |   |                              |       |                      | 25B5                        |
| 200   | -23V                                   | 135                     | 1.8                                  | 62.0                        | 18000  | 5000                                    | —                            | 2500  | 7.1                  | 25B6G                       |
| 100   | -1V                                    | —                       | —                                    | 0.6                         | 75000  | 1500                                    | 112                          | —     | —                    | —                           |
| 100   | -3V                                    | 100                     | 2.0                                  | 7.6                         | 185000   | 2000                                    | —                            | —     | —                    | 25B8GT                      |
| For other characteristics, refer to Type 6BK5   |  |                         |                                      |                             |  |   |                              |       |                      | 25BK5                       |
| Max. DC Plate Volts, 600<br>Max. DC Cathode mA, 112.5   |  |                         |                                      |                             | Absolute Max. Peak Positive-Pulse Plate Volts, 6000 (Abs.)<br>Max. Plate Dissipation, 11 Watts                     |   |                              |       |                      | 25BQ6<br>GT                 |
| For other characteristics, refer to Type 6Y6G   |  |                         |                                      |                             |  |   |                              |       |                      | 25C6G                       |
| 110   | -4V                                    | 110                     | 3.5                                  | 32                          | 16000  | 8100                                    | —                            | 3500  | 1.1                  | 25CA5                       |
| 125   | -4.5V                                  | 125                     | 4                                    | 37                          | 15000  | 9200                                    | —                            | 4500  | 1.5                  | —                           |
| Max. DC Plate Volts, 700<br>Max. DC Plate mA, 200   |  |                         |                                      |                             | Max. Peak Positive-Plus Plate Vols, 7000<br>Max. Plate Dissipation, 20 Watts                                       |   |                              |       |                      | 25CD6<br>GA                 |
| For other characteristics, refer to Type 6CK3   |  |                         |                                      |                             |  |   |                              |       |                      | 25CK3                       |
| For other characteristics, refer to Type 6CM3   |  |                         |                                      |                             |  |   |                              |       |                      | 25CM3                       |
| For other characteristics, refer to Type 6DN6   |  |                         |                                      |                             |  |   |                              |       |                      | 25DN6                       |
| Max. DC Plate Supply Volts, 550<br>Max. Peak Positive Pulse Plate Volts, 7000   |  |                         |                                      |                             | Max. DC Cathode mA, 200<br>Max. Plate Dissipation, 10 watts  |   |                              |       |                      | 25E5/<br>PL36               |
| Max. DC Plate Volts, 700<br>Max. DC Cathode mA, 200   |  |                         |                                      |                             | Max. Peak Positive-Pulse Plate Volts, 700 (Abs.)<br>Max. Plate Dissipation 10 watts.                               |   |                              |       |                      | 25EC6                       |
| 110   | -7.5V                                  | 110                     | 3.8                                  | 43                          | 13000  | 6400                                    | —                            | 2500  | 1.5                  | 25F5A                       |
| 100   | -8.2V                                  | 100                     | 7                                    | 100                         | 5000   | 14000                                   | —                            | —     | —                    | —                           |
| 40  | 0V                                     | 100                     | 19                                   | 240                         | Instantaneous Plate Knee characteristic  |   |                              |       |                      | 25HX5                       |
| For other characteristics, refer to Type 6JQ6   |  |                         |                                      |                             |  |   |                              |       |                      | 25JQ6                       |
| 110   | -7.5V                                  | 110                     | 4                                    | 49                          | 13000  | 9000                                    | —                            | 2000  | 2.1                  | 25L6                        |
| 200   | -8V                                    | 110                     | 2                                    | 50                          | 30000  | 9500                                    | —                            | 3000  | 4.3                  | —                           |
| For other characteristics, refer to Type 50L6GT   |  |                         |                                      |                             |  |   |                              |       |                      | 25L6GT<br>25L6GT/<br>25W6GT |
| Output Triode: Plate Volts, 180; Plate mA, 46; Load, 4000 ohms<br>Triode: Plate Volts, 100; Grid Volts, 0; A-F Signal Volts (Peak), 29.7; Plate mA, 5.8 |  |                         |                                      |                             |  |   |                              |       | 3.8                  | 25N6G                       |
| Max. Peak Inverse Plate Volts, 3850 (Abs.)<br>Max. Peak Plate mA, 750<br>Max. DC Plate mA, 125  |  |                         |                                      |                             | Max. Peak Heater-Cathode Volts: { -500 (Abs.)<br>+200<br>DC Component must not exceed 100 volts                    |   |                              |       |                      | 25W4GT                      |
| 225   | -30                                    | —                       | —                                    | 22                          | 1600   | 3800                                    | 6.2                          | —     | —                    | 25W6GT                      |
| Max. DC Output mA per Plate, 75   |  |                         |                                      |                             |  |   |                              |       |                      | 25Y5                        |
| For other ratings, refer to Type 25Z6   |  |                         |                                      |                             |  |   |                              |       |                      | 25Z5                        |
| Max. AC Volts per Plate (RMS), 117<br>Max. DC Output mA, 75   |  |                         |                                      |                             | Min. Total Effective Plate-Supply Impedance: Half-<br>Wave, 30 ohms; Full-Wave, 15 ohms                            |   |                              |       |                      | 25Z6                        |
| Max. AC Volts per Plate (RMS), 235<br>Max. DC Output mA per Plate, 75   |  |                         |                                      |                             | Min. Total Effect. Supply Imped. per Plate: at 117 volts<br>15 ohms; at 150 volts, 40 ohms; at 235 volts, 100 ohms |   |                              |       |                      | 25Z6GT                      |
| 180   | -14.5V                                 | —                       | —                                    | 6.2                         | 7300   | 1150                                    | 8.3                          | —     | —                    | 26                          |
| 250   | 125Ω                                   | 100                     | 4.0                                  | 10.5                        | 1M   | 4000                                    | —                            | —     | —                    | 26A6♦                       |
| 26.5  | -4.5V                                  | 26.5                    | 1.9                                  | 20                          | [each<br>unit]   | 5700                                    | —                            | 1500  | 180mW                | 26A7GT♦                     |
| 250   | -9V                                    | —                       | —                                    | 9.5                         | 8500   | 1900                                    | 16                           | —     | —                    | 26C6♦                       |
| 250   | Self<br>excited                        | 100                     | 7.8                                  | 3.0                         | 1M   | 475                                     | Grid-No.1 resistor = 20000Ω  | —     | —                    | 26D6♦                       |
| Max. Peak Positive Pulse Plate Volts, 7500<br>Max. Peak Cathode mA, 1400  |  |                         |                                      |                             | Max. DC Cathode mA, 400<br>Max. Plate Dissipation, 40 watts  |   |                              |       |                      | 26LW6                       |

| RCA<br>Type     | Name                                     | Out-<br>line | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |         | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use           |
|-----------------|--|--------------|--------------------------|---------------------------|---------|--|
|                 |  |              |                          | Volts                     | Amperes |  |
| 27              | Low-Mu Triode                            | 22 or<br>13H | 5A                       | 2.5                       | 1.75    | Class A Amplifier  |
| 29KQ6/<br>PL521 | Beam Power Tube                          | 35A          | 9RJ                      | 29                        | 0.3     | Horizontal Deflection Amplifier  |
| 30              | Medium-Mu Triode                         | 22 or<br>13H | 4D                       | 2.0F                      | 0.06    | Amplifier  |
| 30JZ6           | Beam Power Tube                          | 16A          | 12GD                     | 30                        | 0.3     | Horizontal Deflection Amplifier  |
| 30AG11          | Twin Diode—Twin-Triode                   | 8A           | 12DA                     | 30                        | 0.15    | Each Triode as Class A Amplifier   |
| 30MB6           | Beam Power Tube                          | 16H          | 12FY                     | 30                        | 0.45    | Horizontal Deflection Amplifier  |
| 31              | Power Triode                             | 22 or<br>13H | 4D                       | 2.0F                      | 0.13    | Class A Amplifier  |
| 31AL10          | Dual Medium-Mu Triode<br>Beam Power Tube | 8C           | 12HR                     | 31.5                      | 0.315   | Triode No. 1 as Class A Amplifier<br>Triode No. 2 as Class A Amplifier<br>Beam Unit as Class A Amplifier           |
| 31JS6A          | Beam Power Tube                          | 16B          | 12FY                     | 31.5                      | 0.45    | Horizontal Deflection Amplifier  |
| 32              | Sharp-Cutoff Tetrode                     | 29K          | 4K                       | 2.0F                      | 0.06    | Class A Amplifier  |
| 32ET5<br>32ET5A | Power Pentode                            | 5D           | 7CV                      | 32.0                      | 0.1     | Class A Amplifier  |
| 32HQ7           | Damper Diode<br>Beam Power Tube          | 15A          | 12HT                     | 32.6                      | 0.315   | Diode Unit as Television<br>Damper Service<br>Beam Unit as<br>Horizontal Deflection Amplifier<br>Class A Amplifier |
| 32L7GT          | Rectifier—Beam Power Tube                | 14A          | 8Z                       | 32.5                      | 0.3     | Half-Wave Rectifier  |
| 33              | Power Pentode                            | 25           | 5K                       | 2.0F                      | 0.26    | Class A Amplifier  |
| 33GT7           | Damper Diode<br>Beam Power Tube          | 15A          | 12FC                     | 33.6                      | 0.45    | Diode Unit as Television<br>Damper Service<br>Beam Unit as<br>Horizontal Deflection Amplifier                      |
| 33GY7           | Diode—Beam Power Tube                    | 15A          | 12FN                     | 33.6                      | 0.45    | Diode Unit as<br>Television Damper Service<br>Beam Power Unit as<br>Horizontal Deflection Amplifier                |
| 33JV6           | Beam Power Tube                          | 15B          | 12FK                     | 33                        | 0.3     | Horizontal Deflection Amplifier  |
| 34              | Remote-Cutoff Pentode                    | 29K          | 4M                       | 2.0F                      | 0.06    | Screen-Grid RF Amplifier   |
| 34CM3           | Half-Wave Rectifier                      | 30B          | 9HP                      | 33.5                      | 0.45    | Television Damper Service  |
| 34GD5<br>34DG5A | Beam Power Tube                          | 5D           | 7CV                      | 34.0                      | 0.1     | Class A Amplifier  |
| 34R3            | Half-Wave Rectifier                      | 7C           | 9CB                      | 34                        | 0.15    | Television Damper Service  |
| 35              | Remote-Cutoff Tetrode                    | 29K          | 5E                       | 2.5                       | 1.75    | Screen-Grid RF Amplifier   |
| 35A5            | Beam Power Tube                          | 12C          | 6AA                      | 35.0                      | 0.15    | Single-Tube Class A Amplifier  |
| 35B5            | Beam Power Tube                          | 5D           | 7BZ                      | 35.0                      | 0.15    | Class A Amplifier  |
| 35DZ8           | High-Mu Triode—Power Pentode             | 6H           | 9JE                      | 35.0                      | 0.15    | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A<br>Amplifier   |
| 35EH5           | Power Pentode                            | 5D           | 7CV                      | 35                        | 0.15    | Class A Amplifier  |
| 35GL6           | Beam Power Tube                          | 5D           | 7FZ                      | 35.0                      | 0.15    | Class A Amplifier  |
| 35L6GT          | Beam Power Tube                          | 13D          | 7AC                      | 35                        | 0.15    | Class A Amplifier  |

| Plate<br>Volts                                  | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts                    | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA       | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduct-<br>ance<br>Micromhos                                   | Amplifi-<br>cation<br>Factor            | Power        |                      | RCA<br>Type     |
|---|--|--|--------------------------------------|-----------------------------------|-------------------------------------|---|---|--------------|----------------------|-----------------|
|   |  |  |                                      |                                   |                                     |   |   | Load<br>Ohms | Out-<br>put<br>Watts |                 |
| 250   | -21V                                   | —  | —                                    | 5.2                               | 9250                                | 975   | 9.0                                     | —            | —                    | 27              |
| Max. DC Plate Volts, 275                        |  | Max. Peak Positive Pulse Plate Volts, 6500 |                                      | Max. Plate Dissipation, 17 watts  |                                     | Max. DC Cathode mA, 275   |   |              |                      | 29KQ6/<br>PL521 |
| For other characteristics, refer to Type 1H4G   |  |  |                                      |                                   |                                     |   |   |              |                      | 30              |
| For other characteristics, refer to Type 6JZ6   |  |  |                                      |                                   |                                     |   |   |              |                      | 30JZ6           |
| For other characteristics, refer to Type 6AG11  |  |  |                                      |                                   |                                     |   |   |              |                      | 30AG11          |
| Max. DC Plate Volts, 990                        |  | Max. Peak Positive Pulse Plate Volts, 8000 |                                      | Max. Plate Dissipation, 38 watts  |                                     | Max. DC Cathode mA, 400   |   |              |                      | 30MB6           |
| 180   | -30V                                   | —  | —                                    | 12.3                              | 3600                                | 1050  | 3.8                                     | 5700         | 0.375                | 31              |
| 150   | -2V                                    | —  | —                                    | 5.4                               | 11000                               | 3900  | —                                       | —            | —                    | 31AL10          |
| 150   | -5V                                    | —  | —                                    | 5.5                               | 8500                                | 2350  | —                                       | —            | —                    |                 |
| 120   | -8V                                    | 110  | 3.5                                  | 46                                | 11700                               | 7100  | Instantaneous Plate Knee characteristic |              |                      |                 |
| 40  | 0                                      | 110  | 16.5                                 | 122                               |                                     |   |   |              |                      |                 |
| For other characteristics, refer to Type 6JS6A  |  |  |                                      |                                   |                                     |   |   |              |                      | 31JS6A          |
| 180<br>(Max.)                                   | -3V                                    | 67.5                                       | 0.4                                  | 1.7                               | 1 M                                 | 650   | —                                       | —            | —                    | 32              |
| 110   | -7.5V                                  | 110  | 2.8                                  | 30                                | 21500                               | 5500  | —                                       | 2800         | 1.2                  | 32ET5<br>32ET5A |
| Max. Peak Inverse Plate Volts, 3300             |  | Max. Peak Plate mA, 600                    |                                      | Max. Plate Dissipation, 3.8 watts |                                     | Max. Peak Heater-Cathode Volts, +200, -3300                               |   |              |                      | 32HQ7           |
| Max. DC Plate Supply Volts, 400                 |  | Max. Peak Positive-Pulse Plate Volts, 4000 |                                      | Max. DC Cathode mA, 125           |                                     | Max. Plate Dissipation, 7 watts   |   |              |                      | 32L7GT          |
| 90  | -7V                                    | 90   | 2.0                                  | 27.0                              | 17000                               | 4800  | —                                       | 2600         | 1.0                  |                 |
| Maximum AC Plate Voltage.....                   |  |  |                                      |                                   |                                     | 125 Volts, RMS  |   |              |                      |                 |
| Maximum DC Output Current.....                  |  |  |                                      |                                   |                                     | 60 Milliamperes   |   |              |                      |                 |
| 180   | -18V                                   | 180  | 5.0                                  | 22.0                              | 55000                               | 1750  | —                                       | 6000         | 1.4                  | 33              |
| Max. Peak Inverse Plate Volts, 2500             |  | Max. Peak Plate mA, 750                    |                                      | Max. Plate Dissipation, 3.5 watts |                                     | Max. Peak Heater-Cathode Volts, +200, -2500                               |   |              |                      | 33GT7           |
| Max. DC Plate Supply Volts, 400                 |  | Max. Peak Positive Plate Volts, 3500       |                                      | Max. DC Cathode mA, 140           |                                     | Max. Plate Dissipation, 9 watts   |   |              |                      | 33GY7           |
| Max. Peak Inverse Plate Volts, 4200             |  | Max. Peak Plate mA, 810                    |                                      | Max. Plate Dissipation, 3.8 watts |                                     | Max. Peak Heater-Cathode Volts: $\begin{cases} -4200 \\ +200 \end{cases}$ |   |              |                      |                 |
| Max. DC Plate Supply Volts, 400                 |  | Max. Peak Positive-Pulse Plate Volts, 5000 |                                      | Max. DC Cathode mA, 155           |                                     | Max. Plate Dissipation, 9 watts   |   |              |                      | 33JV6           |
| For other characteristics, refer to Type 21JY6  |  |  |                                      |                                   |                                     |   |   |              |                      | 33JV6           |
| 180   | -3V<br>min.                            | 67.5                                       | 1.0                                  | 2.8                               | 1 M                                 | 620   | —                                       | —            | —                    | 34              |
| For other characteristics, refer to Type 6CM3   |  |  |                                      |                                   |                                     |   |   |              |                      | 34CM3           |
| 110   | -7.5V                                  | 110  | 3                                    | 35                                | 13000                               | 5700  | —                                       | 2500         | 1.4                  | 34GD5<br>34DG5A |
| Max. Peak Inverse Plate Volts, 4500             |  | Max. Peak Plate mA, 450                    |                                      | Max. DC Cathode mA, 150           |                                     |   |   |              |                      | 34R3            |
| 250   | -3V<br>min.                            | 90   | 2.5                                  | 6.5                               | —                                   | 1050  | —                                       | —            | —                    | 35              |
| For other characteristics, refer to Type 35L6GT |  |  |                                      |                                   |                                     |   |   |              |                      | 35A5            |
| For other characteristics, refer to Type 35C5   |  |  |                                      |                                   |                                     |   |   |              |                      | 35B5            |
| 120   | 1500Ω                                  | —  | —                                    | 0.8                               | —                                   | 1400  | 100                                     | —            | —                    | 35DZ8           |
| 140   | 180Ω                                   | 120  | 6                                    | 45                                | —                                   | 7500  | —                                       | 2500         | 2.0                  |                 |
| 110   | 62Ω                                    | 115  | 7.2                                  | 32                                | 14000                               | 3000  | —                                       | 3000         | 1.2                  | 35EH5           |
| 110   | -7.5V                                  | 110  | 3                                    | 45                                | 12000                               | 7500  | —                                       | 2500         | 1.8                  | 35GL6           |
| 200   | 180Ω                                   | 125  | 2                                    | 43                                | 34000                               | 6100  | —                                       | 5000         | 3                    | 35L6GT          |
| 110   | -7.5V                                  | 110  | 3                                    | 40                                | 14000                               | 5800  | —                                       | 2500         | 1.5                  |                 |

| RCA<br>Type      | Name  | Out-<br>line | Terminal<br>Dia-<br>gram          | Heater or<br>Filament (F) |         | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|------------------|---|--------------|-----------------------------------|---------------------------|---------|--|
|                  |   |              |                                   | Volts                     | Amperes |  |
|                  |   |              |                                   |                           |         |  |
| 35Y4             | Half-Wave Rectifier Heater Tap<br>for Pilot | 12C          | 5AL<br>Pilot Between Pins 1 and 4 | 35.0                      | 0.15    | With Capacitive-Input Filter   |
| 35Z3             | Half-Wave Rectifier                         | 12C          | 4Z                                | 35.0                      | 0.15    | With Capacitive-Input Filter   |
| 35Z4GT           | Half-Wave Rectifier                         | 13D          | 5AA                               | 35.0                      | 0.15    | With Capacitive-Input Filter   |
| 36               | Sharp-Cutoff Tetrode                        | 24B          | 5E                                | 6.3                       | 0.3     | Screen-Grid RF Amplifier   |
| 36AM3            | Half-Wave Rectifier                         | 5D           | 5BQ                               | 36.0                      | 0.1     | With Capacitive-Input Filter   |
| 36AM3A           | Half-Wave Rectifier                         | 5D           | 5BQ                               | 36.0                      | 0.1     | With Capacitive-Input Filter   |
| 37               | Medium-Mu Triode                            | 22 or<br>13H | 5A                                | 6.3                       | 0.3     | Class A Amplifier  |
| 38               | Power Pentode                               | 24B          | 5F                                | 6.3                       | 0.3     | Class A Amplifier  |
| 39/44            | Remote-Cutoff Pentode                       | 24B          | 5F                                | 6.3                       | 0.3     | Class A Amplifier  |
| 40               | Medium-Mu Triode                            | 26           | 4D                                | 5.0F                      | 0.25    | Class A Amplifier  |
| 40KD6            | Beam Power Tube                             | 16C          | 12GW                              | 40                        | 0.45    | Horizontal Deflection Amplifier  |
| 41               | Power Pentode                               | 22 or<br>13H | 6B                                | 6.3                       | 0.4     | Amplifier  |
| 42               | Power Pentode                               | 28           | 6B                                | 6.3                       | 0.7     | Amplifier  |
| 42EC4A/<br>PY500 | Half-Wave Rectifier                         | 35C          | 6EC4                              | 42                        | 0.3     | Television Damper Service  |
| 43               | Power Pentode                               | 28           | 6B                                | 25.0                      | 0.3     | Amplifier  |
| 45               | Power Triode                                | 26           | 4D                                | 2.5F                      | 1.5     | Class A Amplifier  |
| 45Z3             | Half-Wave Rectifier                         | 5C           | 5AM                               | 45.0                      | 0.075   | Half-Wave Rectifier  |
| 45Z5GT           | Half-Wave Rectifier<br>Heater Tap for Pilot | 13D          | 6AD<br>Pilot Between Pins 2 and 3 | 45.0                      | 0.15    | With Capacitive-Input Filter   |
| 46               | Dual-Grid Power Amplifier                   | 27B          | 5C                                | 2.5F                      | 1.75    | Class A Amplifier  |
| 47               | Power Pentode                               | 27B          | 5B                                | 2.5F                      | 1.75    | Class A Amplifier  |
| 48               | Power Tetrode                               | 27B          | 6A                                | 30.0                      | 0.4     | Class A Amplifier  |
| 49               | Dual-Grid Power Amplifier                   | 26           | 5C                                | 2.0F                      | 0.12    | Class A Amplifier  |
| 50               | Power Triode                                | 29L          | 4D                                | 7.5F                      | 1.25    | Class A Amplifier  |
| 50A5             | Beam Power Tube                             | 12C          | 6AA                               | 50.0                      | 0.15    | Class A Amplifier  |
| 50B5             | Beam Power Tube                             | 5D           | 7BZ                               | 50                        | 0.15    | Class A Amplifier  |
| 50C6G            | Beam Power Tube                             | 25           | 7AC                               | 50.0                      | 0.15    | Single-Tube Class A Amplifier  |
| 50DC4            | Half-Wave Rectifier                         | 5D           | 5BQ                               | 50                        | 0.15    | With Capacitive-Input Filter   |
| 50FE5            | Beam Power Tube                             | 13G          | 8KB                               | 50.0                      | 0.15    | Class A Amplifier  |
| 50FK5            | Power Pentode                               | 5D           | 7CV                               | 50.0                      | 0.1     | Class A Amplifier  |
| 50HC6            | Power Pentode                               | 5D           | 7FZ                               | 50                        | 0.15    | Class A Amplifier  |
| 50JY6            | Beam Power Tube                             | 14L          | 8MG                               | 50                        | 0.5     | Horizontal Deflection Amplifier  |
| 50X6             | Rectifier-Doubler                           | 12C          | 7DX                               | 50.0                      | 0.15    | Rectifier-Doubler  |
| 50Y6GT           | Rectifier-Doubler                           | 13D          | 7Q                                | 50.0                      | 0.15    | Rectifier-Doubler  |
| 50Y7GT           | Rectifier-Doubler<br>Heater Tap for Pilot   | 13D          | 8AN<br>Pilot Between Pins 6 and 7 | 50.0                      | 0.15    | Voltage Doubler<br>Half-Wave Rectifier   |
| 50Z7G            | Rectifier-Doubler<br>Heater Tap for Pilot   | 22           | 8AN<br>Pilot Between Pins 6 and 7 | 50.0                      | 0.15    | Voltage Doubler<br>Half-Wave Rectifier   |
| 53               | High-Mu Twin Power Triode                   | 26           | 7B                                | 2.5                       | 2.0     | Amplifier  |

| Plate<br>Volts                                       | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms  | Trans-<br>conduc-<br>tance<br>Micromhos | Amplifi-<br>cation<br>Factor | Power        |                      | RCA<br>Type      |      |
|--|--|-------------------------|--------------------------------------|-----------------------------|--|---|------------------------------|--------------|----------------------|------------------|------|
|  |  |                         |                                      |                             |  |   |                              | Load<br>Ohms | Out-<br>put<br>Watts |                  |      |
| For other characteristics, refer to Type 35W4        |  |                         |                                      |                             |  |   |                              |              |                      | 35Y4             |      |
| For other ratings, refer to Type 35Z5GT              |  |                         |                                      |                             |  |   |                              |              |                      | 35Z3             |      |
| Max. DC Output mA, 100                               |  |                         |                                      |                             | Min. Total Effective Plate-Supply Impedance: Up to 117<br>volts, 15 ohms; at 235 volts, 100 ohms                         |   |                              |              |                      | 35Z4GT           |      |
| 100  | — 1.5V                                 | 55                      | —                                    | 1.8                         | 550000   | 850                                     | —                            | —            | —                    | 36               |      |
| 250  | — 3V                                   | 90                      | 1.7                                  | 3.2                         | 550000   | 1080                                    | —                            | —            | —                    | 36               |      |
| AC Plate Volts (RMS), 117                            |  |                         |                                      |                             | Max. Peak Inverse Volts, 365   |   |                              |              |                      | 36AM3            |      |
| Max. DC Output mA, 82                                |  |                         |                                      |                             | Tube Voltage Drop for Plate mA, 150, 20 volts  |   |                              |              |                      | 36AM3            |      |
| Max. AC Plate Volts (RMS), 120                       |  |                         |                                      |                             | Max. Peak Inverse Volts, 365   |   |                              |              |                      | 36AM3A           |      |
| Max. DC Output mA, 82                                |  |                         |                                      |                             | Tube Voltage Drop for Plate mA, 150, 16 volts  |   |                              |              |                      | 36AM3A           |      |
| 250  | —18V                                   | —                       | —                                    | 7.5                         | 8400   | 1100                                    | 9.2                          | —            | —                    | 37               |      |
| 250  | —25V                                   | 250                     | 3.8                                  | 22.0                        | 100000   | 1200                                    | —                            | 10000        | 2.50                 | 38               |      |
| 250  | { — 3V<br>min. }                       | 90                      | 1.4                                  | 5.8                         | 1.0  | 1050                                    | —                            | —            | —                    | 39/44            |      |
| 180  | — 3V                                   | —                       | —                                    | 0.2                         | 150000   | 200                                     | 30                           | —            | —                    | 40               |      |
| For other characteristics, refer to Type 6KD6        |  |                         |                                      |                             |  |   |                              |              |                      | 40KD6            |      |
| For other characteristics, refer to Type 6K6GT       |  |                         |                                      |                             |  |   |                              |              |                      | 41               |      |
| For other characteristics, refer to Type 6F6G        |  |                         |                                      |                             |  |   |                              |              |                      | 42               |      |
| For other characteristics, refer to Type 6EC4A/EY500 |  |                         |                                      |                             |  |   |                              |              |                      | 42EC4A/<br>PY500 |      |
| For other characteristics, refer to Type 25A6        |  |                         |                                      |                             |  |   |                              |              |                      | 43               |      |
| 275  | —56V                                   | —                       | —                                    | 36.0                        | 1700   | 2050                                    | 3.5                          | 4600         | 2.00                 | 45               |      |
| Max. Peak Inverse Volts, 350                         |  |                         |                                      | Max. DC Output mA, 65       |  |   | Max. Peak Plate mA, 390      |              |                      |                  | 45Z3 |
| For other ratings, refer to Type 35Z5GT              |  |                         |                                      |                             |  |   |                              |              |                      | 45Z5GT           |      |
| 250  | —33V                                   | —                       | —                                    | 22                          | 2380   | 2350                                    | 5.6                          | 6400         | 1.25                 | 46               |      |
| 250  | 450Ω                                   | 250                     | 6.0                                  | 31                          | 60000  | 2500                                    | —                            | 7000         | 2.7                  | 47               |      |
| 125  | —20V                                   | 100                     | 9.5                                  | 56                          | —  | 3900                                    | —                            | 1500         | 2.5                  | 48               |      |
| 135  | —20V                                   | —                       | —                                    | 6.0                         | 4175   | 1125                                    | 4.7                          | 11000        | 0.17                 | 49               |      |
| 450  | —84V                                   | —                       | —                                    | 55                          | 1800   | 2100                                    | 3.8                          | 4350         | 4.6                  | 50               |      |
| For other characteristics, refer to Type 50L6GT      |  |                         |                                      |                             |  |   |                              |              |                      | 50A5             |      |
| For other characteristics, refer to Type 50C5        |  |                         |                                      |                             |  |   |                              |              |                      | 50B5             |      |
| 135  | —13.5V                                 | 135                     | 3.5                                  | 58                          | 9300   | 7000                                    | —                            | 2000         | 3.6                  | 50C6G            |      |
| 200  | —14V                                   | 135                     | 2.2                                  | 61                          | 18300  | 7100                                    | —                            | 2600         | 6                    | 50C6G            |      |
| AC Plate Volts (RMS) 117                             |  |                         |                                      |                             | DC Output mA, 110  |   |                              |              |                      | 50DC4            |      |
| Max. Peak Inverse Plate Volts, 330                   |  |                         |                                      |                             | Max. Peak Plate mA, 720  |   |                              |              |                      | 50DC4            |      |
| For other characteristics, refer to Type 6FE5        |  |                         |                                      |                             |  |   |                              |              |                      | 50FE5            |      |
| 110  | 62Ω                                    | 115                     | 8.5                                  | 32                          | 14000  | 12800                                   | —                            | 3000         | 1.2                  | 50FK5            |      |
| 110  | 62Ω                                    | 115                     | 11.5                                 | 42                          | 11000  | 14600                                   | —                            | 3000         | 1.4                  | 50HC6            |      |
| Max. DC Plate Volts, 275                             |  |                         |                                      |                             | Max. DC Cathode mA, 220  |   |                              |              |                      | 50JY6            |      |
| Max. Peak Positive-Pulse Plate Volts, 7700           |  |                         |                                      |                             | Max. Plate Dissipation, 13 watts   |   |                              |              |                      | 50JY6            |      |
| For other ratings, refer to Type 25Z6GT              |  |                         |                                      |                             |  |   |                              |              |                      | 50X6             |      |
| For other ratings, refer to Type 25Z6GT              |  |                         |                                      |                             |  |   |                              |              |                      | 50Y6GT           |      |
| Max. AC Volts per Plate (RMS), 117                   |  |                         |                                      |                             | Min. Total Effective Plate-Supply Impedance per<br>Plate, 15 ohms  |   |                              |              |                      | 50Y7GT           |      |
| Max. DC Output mA, 65                                |  |                         |                                      |                             | Min. Total Effec. Plate-Supply Imped. per Plate: At 117<br>volts, 15 ohms; at 150 volts, 40 ohms; at 235 volts, 100 ohms |   |                              |              |                      | 50Y7GT           |      |
| Max. AC Volts per Plate (RMS), 235                   |  |                         |                                      |                             | Max. DC Output mA, 65  |   |                              |              |                      | 50Z7G            |      |
| Max. DC Output mA per Plate, 65                      |  |                         |                                      |                             | Max. DC Output mA per Plate, 65  |   |                              |              |                      | 50Z7G            |      |
| For other characteristics, refer to Type 6N7         |  |                         |                                      |                             |  |   |                              |              |                      | 53               |      |

| RCA<br>Type          | Name                                | Out-<br>line                         | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |             | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|----------------------|-------------------------------------|--------------------------------------|--------------------------|---------------------------|-------------|--|
|                      |                                     |                                      |                          | Volts                     | Amperes     |  |
|                      |                                     |                                      |                          |                           |             |  |
| 70L7GT               | Rectifier-Beam Power Tube           | 13F                                  | 8A                       | 70.0                      | 0.15        | Amplifier Unit as Class A Amplifier<br>Half-Wave Rectifier   |
| 75                   | Twin Diode—High-Mu Triode           | 24B                                  | 6G                       | 6.3                       | 0.3         | Amplifier  |
| 78                   | Remote-Cutoff Pentode               | 24B                                  | 6F                       | 6.3                       | 0.3         | Amplifier Mixer  |
| 80                   | Full-Wave Rectifier                 | 28                                   | 4C                       | 5.0F                      | 2.0         | With Capacitive-Input Filter<br>With Inductive-Input Filter  |
| 83♦                  | Full-Wave Mercury-Vapor Rectifier   | 27B                                  | 4C                       | 5.0                       | 3.0         | With Capacitive-Input Filter<br>With Inductive-Input Filter  |
| 84/6Z4               | Full-Wave Rectifier                 | 22 or<br>13H                         | 5D                       | 6.3                       | 0.5         | With Capacitive-Input Filter<br>With Inductive-Input Filter  |
| 117L7<br>GT/<br>M7GT | Rectifier-Beam Power Tube           | 13F                                  | 8A0                      | 117                       | 0.09        | Amplifier Unit as Class A Amplifier<br>Half-Wave Rectifier   |
| 117N7<br>GT          | Rectifier-Beam Power Tube           | 13F                                  | 8AV                      | 117                       | 0.09        | Amplifier Unit as Class A Amplifier<br>Half-Wave Rectifier   |
| 117P7<br>GT          | Rectifier-Beam Power Tube           | 13F                                  | 8AV                      | 117                       | 0.09        |  |
| 117Z3                | Half-Wave Rectifier                 | 5D                                   | 4CB                      | 117                       | 0.04        | With Capacitive-Input Filter   |
| 117Z4<br>GT          | Half-Wave Rectifier                 | 29F                                  | 5AA                      | 117                       | 0.04        | With Capacitive-Input Filter   |
| 117Z6<br>GT          | Rectifier-Doubler                   | 13D                                  | 7Q                       | 117                       | 0.075       | Voltage Doubler<br>Half-Wave Rectifier   |
| 407A♦                | Medium-Mu Twin Triode               | 6A                                   | 407A                     | 40<br>20                  | 0.05<br>0.1 | Class A Amplifier  |
| 408A♦                | Sharp-Cutoff Pentode                | 5B                                   | 7BD                      | 20                        | 0.05        | Class A Amplifier  |
| 884♦                 | Gas Triode                          | 22                                   | 6Q2                      | 6.3                       | 0.6         | Relaxation Oscillator<br>Grid-Controlled Rectifier   |
| 955♦                 | Medium-Mu Triode                    | acorn                                | 5BC                      | 6.3                       | 0.15        | AF and RF Amplifier  |
| 959♦                 | Pentode                             | acorn                                | 5BE                      | 1.25F                     | 0.05        | Class A Amplifier  |
| 991♦                 | Glow-Discharge Tube                 | Double<br>Contact<br>Cande-<br>labra | 991                      | —                         | —           | Voltage Regulator  |
| 1612♦                | Pentagrid Amplifier                 | 3                                    | 7T                       | 6.3                       | 0.3         | Class A Amplifier  |
| 1614♦                | Beam Power Tube                     | 4                                    | 7S                       | 6.3                       | 0.9         | Class A, AB Amplifier  |
| 1619♦                | Beam Power Tube                     | 4                                    | 7AW                      | 2.5F                      | 2.0         | Class AB, C Amplifier  |
| 1620♦                | Sharp-Cutoff Pentode                | 3                                    | 7R                       | 6.3                       | 0.3         | Class A Amplifier  |
| 1621♦                | Power Pentode                       | 2B                                   | 7S                       | 6.3                       | 0.7         | Class A Amplifier  |
| 1622♦                | Beam Power Tube                     | 4                                    | 7S                       | 6.3                       | 0.9         | Class AB, C Amplifier  |
| 1629♦                | Electron-Ray Tube                   | 13H                                  | 7AL                      | 12.6                      | 0.15        | Visual Indicator   |
| 1635♦                | High-Mu Twin Power-Triode           | 13D                                  | 8B                       | 6.3                       | 0.6         | Power Amplifier  |
| 2081/<br>6AW8A♦      | High-Mu Triode—Sharp-Cutoff Pentode | 6E                                   | 9DX                      | 6.3                       | 0.45        | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                                    |

♦ Industrial type

| Plate<br>Volts                    | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts                         | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA  | AC Plate<br>Resist-<br>ance<br>Ohms  | Trans-<br>conduct-<br>ance<br>Micromhos | Amplifi-<br>cation<br>Factor | Power   |                      | RCA<br>Type  |         |
|-----------------------------------|--|---|--------------------------------------|--|--------------------------------------|---|------------------------------|---|----------------------|--------------|---------|
|                                   |  |   |                                      |  |                                      |   |                              | Load<br>Ohms  | Out-<br>put<br>Watts |              |         |
| 110                               | — 7.5V                                 | 110   | 3.0                                  | 40.0   | 15000                                | 7500                                    | —                            | 2000  | 1.8                  | 70L7GT       |         |
| Max. Peak Inverse Volts, 350      |  | Max. DC Output mA, 70                           |                                      |  | Max. Peak Plate mA, 420              |   |                              |   |                      |              |         |
|                                   |  | Min. Total Effect. Plate-Supply Imped., 15 ohms |                                      |  |                                      |   |                              |   |                      |              |         |
|                                   |  | For other characteristics, refer to Type 6SQ7   |                                      |  |                                      |   |                              |   |                      |              |         |
|                                   |  | For other characteristics, refer to Type 6K7    |                                      |  |                                      |   |                              |   |                      | 75           |         |
|                                   |  |   |                                      |  |                                      |   |                              |   |                      | 78           |         |
| AC Volts per Plate (RMS), 350     |  |   |                                      | DC Output mA, 125  |                                      |   |                              | Min. Total Effect. Supply Imped. per Plate, 50 ohms |                      |              | 80      |
| Max. Peak Inverse Volts, 1400     |  |   |                                      | Max. Peak Plate mA, 440  |                                      |   |                              |   |                      |              |         |
| AC Volts per Plate (RMS), 500     |  |   |                                      | Max. DC Output mA, 125   |                                      |   |                              | Min. Value of Input Choke, 10 henries               |                      |              | 83*     |
| Max. Peak Inverse Volts, 1400     |  |   |                                      | Max. Peak Plate mA, 440  |                                      |   |                              |   |                      |              |         |
| Max. AC Volts per plate (RMS) 450 |  | —   |                                      | Max. DC Output Current, 225mA  |                                      | —                                       |                              | Condenser = 40 μF (max.)                            |                      |              |         |
| Max AC Volts per plate (RMS) 500  |  | —   |                                      | Max. DC Output Current, 225mA  |                                      | —                                       |                              | Choke = 3 henries (min.)                            |                      |              |         |
| AC Volts per Plate (RMS), 325     |  |   |                                      | DC Output mA, 60   |                                      |   |                              | Total Effect. Supply Imped. per Plate, 150 ohms     |                      |              | 84/6Z4  |
| Max. Peak Inverse Volts, 1250     |  |   |                                      | Max. Peak Plate mA, 180  |                                      |   |                              |   |                      |              |         |
| AC Volts per Plate (RMS), 450     |  |   |                                      | Max. DC Output mA, 60  |                                      |   |                              | Value of Input Choke, 10 henries                    |                      |              |         |
| Max. Peak Inverse Volts, 1250     |  |   |                                      | Max. Peak Plate mA, 180  |                                      |   |                              |   |                      |              |         |
| 105                               | — 5.2V                                 | 105   | 4                                    | 43   | 17000                                | 5300                                    | —                            | 4000  | 0.85                 | 117L7GT/M7GT |         |
| Max. AC Plate Volts (RMS), 117    |  |   |                                      | Max. DC Output mA, 75  |                                      |   |                              | Min. Total Effect. Plate-Supply Imped., 15 ohms     |                      |              |         |
| Max. Peak Inverse Volts, 350      |  |   |                                      | Max. Peak Plate mA, 450  |                                      |   |                              |   |                      |              |         |
| 100                               | — 6V                                   | 100   | 5                                    | 51   | 16000                                | 7000                                    | —                            | 3000  | 1.2                  | 117N7GT      |         |
| Max. AC Plate Volts (RMS), 117    |  |   |                                      | Max. DC Output mA, 75  |                                      |   |                              | Min. Total Effect. Plate-Supply Impedance, 15 ohms  |                      |              |         |
| Max. Peak Inverse Volts, 350      |  |   |                                      | Max. Peak Plate mA, 450  |                                      |   |                              |   |                      |              |         |
|                                   |  |   |                                      | For other characteristics, refer to Type 117L7/M7GT  |                                      |   |                              |   |                      |              | 117P7GT |
| Max. Peak Inverse Volts, 330      |  |   |                                      | Max. DC Output mA, 90  |                                      |   |                              | Min. Total Effect. Plate-Supply Imped., 20 ohms     |                      |              | 117Z3   |
|                                   |  |   |                                      | Max. Peak Plate mA, 540  |                                      |   |                              |   |                      |              |         |
| Max. Peak Inverse Volts, 350      |  |   |                                      | Max. DC Output mA, 90  |                                      |   |                              | Min. Total Effect. Plate-Supply Imped., 30 ohms     |                      |              | 117Z4GT |
|                                   |  |   |                                      | Max. Peak Plate mA, 540  |                                      |   |                              |   |                      |              |         |
| AC Volts per Plate (RMS), 117     |  |   |                                      | Min. Total Effective Plate-Supply Impedance per Plate: Half-Wave, 30 ohms; Full-Wave, 15 ohms                    |                                      |   |                              |   |                      |              | 117Z6GT |
| DC Output mA, 60                  |  |   |                                      |  |                                      |   |                              |   |                      |              |         |
| AC Volts per Plate (RMS), 235     |  |   |                                      | Min. Total Effect. Supply Imped. per Plate: At 117 volts, 15 ohms; at 150 volts, 40 ohms; at 235 volts, 100 ohms |                                      |   |                              |   |                      |              |         |
| DC Output mA per Plate, 60        |  |   |                                      |  |                                      |   |                              |   |                      |              |         |
| 150                               | 240Ω                                   | —   | —                                    | 8.2  | 6350                                 | 5500                                    | 35                           | (each unit)   |                      | 407A*        |         |
| 120                               | 200Ω                                   | 120   | 2.2                                  | 7  | 340000                               | 5000                                    | —                            | —   | —                    | 408A*        |         |
|                                   | 300 max                                | —   | —                                    | 300 max (peak)   | Average Anode Current = 75 mA (max.) |   |                              |   | 884*                 |              |         |
|                                   | 350 max                                | —   | —                                    | 300 max (peak)   |                                      |   |                              |   |                      |              |         |
| 250                               | —7                                     | —   | —                                    | 6.3  | 11400                                | 2200                                    | 25                           | —   | —                    | 955*         |         |
| 135                               | —3                                     | 67.5  | 0.4                                  | 1.7  | 800000                               | 600                                     | —                            | —   | —                    | 959*         |         |
| 48-67                             | —                                      | —   | —                                    | 2  | —                                    | —                                       | —                            | —   | —                    | 991*         |         |
| 250                               | —3                                     | 100   | 6.5                                  | 5.3  | 600000                               | 1100                                    | Grid-No.3 Bias = -3V         |   | —                    | 1612*        |         |
|                                   |  |   |                                      | For other characteristics, refer to Type 6L6, 6L6GC  |                                      |   |                              |   |                      | 1614*        |         |
| 300                               | —10                                    | 200   | 4                                    | 44   | 8800                                 | —                                       | —                            | —   | 3                    | 1619*        |         |
|                                   |  |   |                                      | For other characteristics, refer to Type 6J7   |                                      |   |                              |   |                      | 1620*        |         |
|                                   |  |   |                                      | For other characteristics, refer to Type 6F6G  |                                      |   |                              |   |                      | 1621*        |         |
|                                   |  |   |                                      | For other characteristics, refer to Type 6L6, 6L6GC  |                                      |   |                              |   |                      | 1622*        |         |
|                                   |  |   |                                      | For other characteristics, refer to Type 6E5   |                                      |   |                              |   |                      | 1629*        |         |
| 300                               | 0                                      | —   | —                                    | 6.6  | —                                    | *(plate to plate)                       |                              | 12000*  | 10.4                 | 1635*        |         |
|                                   |  |   |                                      | For other characteristics, refer to Type 6AW8  |                                      |   |                              |   |                      | 2081/6AW8A*  |         |

| RCA<br>Type   | Name                          | Out-<br>line      | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |             | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|---|-------------------------------|-------------------|--------------------------|---------------------------|-------------|--|
|   |                               |                   |                          | Volts                     | Amperes     |  |
| 2082/<br>12AY7  | Medium-Mu Twin Triode         | 6B                | 9A                       | 12.6<br>6.3               | 0.15<br>0.3 | Class A Amplifier  |
| 5636 ♦  | Sharp-Cutoff Pentode          | submin-<br>iature | 8DC                      | 6.3                       | 0.15        | Class A Amplifier  |
| 5639 ♦  | Semiremote-Cutoff Pentode     | submin-<br>iature | 8DE                      | 6.3                       | 0.45        | Class A Amplifier  |
| 5642 ♦  | Half-Wave Rectifier           | submin-<br>iature | 5642                     | 1.25F                     | 0.2         | Pulsed Rectifier Service   |
| 5651WA ♦  | Glow Discharge Tube           | 5C                | 5B0                      | —                         | —           | Voltage Reference  |
| 5654/<br>6AK5W/<br>6096 ♦<br>5654W ♦                    | Sharp-Cutoff Pentode          | 5B                | 7BD                      | 6.3                       | 0.175       | Class A Amplifier  |
| 5663 ♦  | Gas-Tetrode                   | 5A                | 6CE                      | 6.3                       | 0.15        | Thyratron  |
| 5670 ♦<br>5670WA ♦                                      | Medium-Mu Twin Triode         | 6A                | 8CJ                      | 6.3                       | 0.35        | Class A Amplifier  |
| 5672 ♦  | Power Pentode                 | submin-<br>iature | 5672                     | 1.25                      | 0.05        | Class A Amplifier  |
| 5678 ♦  | RF Pentode                    | submin-<br>iature | 5678                     | 1.25                      | 0.05        | Class A Amplifier  |
| 5686 ♦  | Beam Power Tube               | 6B                | 9G                       | 6.3                       | 0.35        | Class A Amplifier  |
| 5687 ♦  | Medium-Mu Twin Triode         | 6B                | 9H                       | 12.6<br>6.3               | 0.45<br>0.9 | Class A Amplifier  |
| 5691 ♦  | High-Mu Twin Triode           | 13A               | 8BD                      | 6.3                       | 0.6         | Class A Amplifier  |
| 5692 ♦  | Medium-Mu Twin Triode         | 13A               | 8BD                      | 6.3                       | 0.6         | Class A Amplifier  |
| 5693 ♦  | Sharp-Cutoff Pentode          | 8N                | 2A                       | 6.3                       | 0.3         | Class A Amplifier  |
| 5696A ♦   | Gas Tetrode                   | 5B                | 7BN                      | 6.3                       | 0.15        | Relay Applications   |
| 5718 ♦  | Medium-Mu Triode              | submin-<br>iature | 8DK                      | 6.3                       | 0.15        | Class A Amplifier  |
| 5719 ♦  | High-Mu Triode                | submin-<br>iature | 8DK                      | 6.3                       | 0.15        | Class A Amplifier  |
| 5725 ♦<br>5725/<br>6AS6W ♦                              | Sharp-Cutoff Pentode          | 5B                | 7CM                      | 6.3                       | 0.175       | Class A Amplifier  |
| 5726 ♦<br>5726/<br>6AL5W/<br>6097 ♦<br>5726/<br>6AL5W ♦ | Twin Diode                    | 5B                | 6BT                      | 6.3                       | 0.3         | Half-Wave Rectifier  |
| 5734 ♦  | Mechano-Electronic Transducer | 5734              | 5734                     | 6.3                       | 0.15        | Vibration Measurements*  |
| 5749 ♦<br>5749/<br>6BA6W ♦                              | Remote-Cutoff Pentode         | 5C                | 7BK                      | 6.3                       | 0.3         | Class A Amplifier  |
| 5750 ♦  | Pentagrid Converter           | 5C                | 7CH                      | 6.3                       | 0.3         | Converter  |
| 5751WA ♦  | High-Mu Twin Triode           | 6B                | 9A                       | 12.6<br>6.3               | 0.15<br>0.3 | Class A Amplifier  |
| 5783 ♦  | Glow Discharge Tube           | submin-<br>iature | 5783                     | —                         | —           | Voltage Reference  |
| 5814WA ♦  | Medium-Mu Twin Triode         | 6B                | 9A                       | 12.6<br>6.3               | 0.15<br>0.3 | Class A Amplifier  |
| 5824 ♦  | Power Pentode                 | 25                | 7S                       | 25                        | 0.3         | Class A Amplifier  |
| 5840 ♦<br>5840W ♦                                       | Sharp-Cutoff Pentode          | submin-<br>iature | 8DE                      | 6.3                       | 0.15        | Class A Amplifier  |

♦ Industrial type



| Plate<br>Volts                                 | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduc-<br>tance<br>Micromhos | Amplifi-<br>cation<br>Factor | Power            |                      | RCA<br>Type  |
|--|--|-------------------------|--------------------------------------|-----------------------------|-------------------------------------|---|------------------------------|------------------|----------------------|--|
|  |  |                         |                                      |                             |                                     |   |                              | Load<br>Ohms     | Out-<br>put<br>Watts |  |
| For other characteristics, refer to Type 12AY7 |  |                         |                                      |                             |                                     |   |                              |                  |                      | 2082/<br>12AY7                                       |
| 100  | 150Ω                                   | 100                     | 5.8                                  | 4                           | 50000                               | 1950                                    | EC3 =                        | -3V              | —                    | 5636♦  |
| 150  | 100Ω                                   | 100                     | 4                                    | 21                          | 50000                               | 9000                                    | —                            | —                | —                    | 5639♦  |
| 8000   | —                                      | —                       | —                                    | 0.15                        | —                                   | Tube drop at 4 mA = 30 volts            |                              |                  | —                    | 5642♦  |
| For other characteristics, refer to Type 5651A |  |                         |                                      |                             |                                     |   |                              |                  |                      | 5651WA♦  |
| For other characteristics, refer to Type 5654  |  |                         |                                      |                             |                                     |   |                              |                  |                      | 5654/<br>6AK5W/<br>6096♦<br>5654W♦                   |
| 500  | -10V                                   | 5                       | 2                                    | 20                          | —                                   | —                                       | —                            | —                | —                    | 5653♦  |
| 150  | 240Ω                                   | —                       | —                                    | 8.2                         | 6400                                | 5500                                    | (each unit)                  |                  | —                    | 5670♦<br>5670WA♦                                     |
| 67.5   | -6.5V                                  | 67.5                    | 1.1                                  | 3.25                        | —                                   | 650                                     | —                            | 20000            | .065                 | 5672♦  |
| 67.5   | 0                                      | 67.5                    | 0.48                                 | 1.8                         | 1M                                  | 1100                                    | —                            | —                | —                    | 5678♦  |
| 250  | -12.5V                                 | 250                     | 3                                    | 27                          | 45000                               | 3100                                    | —                            | 9000             | 2.7                  | 5686♦  |
| 250  | -12.5V                                 | —                       | —                                    | 12                          | 3000                                | 5400                                    | 16                           | (each unit)      |                      | 5687♦  |
| 250  | -2                                     | —                       | —                                    | 2.3                         | 44000                               | 1600                                    | 70                           | (each unit)      |                      | 5691♦  |
| 250  | -9V                                    | —                       | —                                    | 6.5                         | 9100                                | 2200                                    | 20                           | (each unit)      |                      | 5692♦  |
| 250  | -3V                                    | 100                     | 0.83                                 | 3                           | —                                   | 1650                                    | —                            | (Grid-No.3 = 0V) |                      | 5693♦  |
| For other characteristics, refer to Type 5696  |  |                         |                                      |                             |                                     |   |                              |                  |                      | 5696A♦   |
| 150  | 180Ω                                   | —                       | —                                    | 13                          | 4150                                | 6500                                    | 27                           | —                | —                    | 5718♦  |
| 150  | 680Ω                                   | —                       | —                                    | 1.85                        | 30500                               | 2300                                    | 70                           | —                | —                    | 5719♦  |
| 120  | -2V                                    | 120                     | 3.5                                  | 5.2                         | —                                   | 3200                                    | —                            | (Grid-No.3 = 0V) |                      | 5725♦<br>5725/<br>6AS6W♦                             |
| For other characteristics, refer to Type 6AL5  |  |                         |                                      |                             |                                     |   |                              |                  |                      | 5726♦<br>5726/<br>6AL5W/<br>6097♦<br>5726/<br>6AL5W♦ |
| 300  | 0V                                     | —                       | —                                    | 1.5                         | 7200                                | 275                                     | —                            | 7500             | —                    | 5734♦  |
| * Up to 12,000 cycles per second.              |  |                         |                                      |                             |                                     |   |                              |                  |                      |  |
| For other characteristics, refer to Type 6BA6  |  |                         |                                      |                             |                                     |   |                              |                  |                      | 5749♦<br>5749/<br>6BA6W♦                             |
| For other characteristics, refer to Type 6BE6  |  |                         |                                      |                             |                                     |   |                              |                  |                      | 5750♦  |
| For other characteristics, refer to Type 5751  |  |                         |                                      |                             |                                     |   |                              |                  |                      | 5751WA♦  |
| 85   | —                                      | —                       | —                                    | 1.5                         | —                                   | —                                       | —                            | —                | —                    | 5783♦  |
| For other characteristics, refer to Type 5814A |  |                         |                                      |                             |                                     |   |                              |                  |                      | 5814WA♦  |
| For other characteristics, refer to Type 25B6G |  |                         |                                      |                             |                                     |   |                              |                  |                      | 5824♦  |
| 100  | 150Ω                                   | 100                     | 2.4                                  | 7.5                         | 260000                              | 5000                                    | —                            | —                | —                    | 5840♦<br>5840W♦                                      |

| RCA<br>Type  | Name                      | Out-<br>line      | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |             | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|--|---------------------------|-------------------|--------------------------|---------------------------|-------------|--|
|  |                           |                   |                          | Volts                     | Amperes     |  |
|  |                           |                   |                          |                           |             |  |
| 5842/<br>417A♦                                     | Medium-Mu Triode          | 6A                | 9V                       | 6.3                       | 0.3         | Class A Amplifier  |
| 5844♦  | Medium-Mu Twin Triode     | 5C                | 7BF                      | 6.3                       | 0.3         | Class A Amplifier  |
| 5847/<br>404A♦                                     | Sharp-Cutoff Pentode      | 6A                | 9X                       | 6.3                       | 0.3         | Class A Amplifier  |
| 5881   | Beam Power Tube           | 29M               | 7AC                      | 6.3                       | 0.9         | Class A Amplifier  |
| 5896♦  | Twin Diode                | submin-<br>lature | 8DJ                      | 6.3                       | 0.3         | Full-Wave Rectifier  |
| 5899♦  | Semiremote-Cutoff Pentode | submin-<br>lature | 8DE                      | 6.3                       | 0.15        | Class A Amplifier  |
| 5902♦  | Beam Power Pentode        | submin-<br>lature | 8DE                      | 6.3                       | 0.45        | Class A Amplifier  |
| 5915♦  | Pentagrid Amplifier       | 5C                | 7CH                      | 6.3                       | 0.3         | Class A Amplifier  |
| 5964♦  | Medium-Mu Twin Triode     | 5C                | 7BF                      | 6.3                       | 0.45        | Class A Amplifier  |
| 6005♦<br>6005/<br>6AQ5W<br>6095♦<br>6005/<br>6AQ5♦ | Beam Power Tube           | 5D                | 7BZ                      | 6.3                       | 0.45        | Class A Amplifier  |
| 6021♦  | Medium-Mu Twin Triode     | submin-<br>lature | 8DG                      | 6.3                       | 0.3         | Class A Amplifier  |
| 6072♦<br>6072A♦                                    | Medium-Mu Twin Triode     | 6B                | 9A                       | 6.3<br>12.6               | 0.15<br>0.3 | Class A Amplifier  |
| 6073♦<br>6073/<br>0A2♦                             | Glow-Discharge Tube       | 5D                | 5B0                      | —                         | —           | Voltage Regulator  |
| 6074♦<br>6074/<br>0B2♦                             | Glow-Discharge Tube       | 5D                | 5B0                      | —                         | —           | Voltage Regulator  |
| 6080WA♦  | Low-Mu Twin Triode        | 36                | 8BD                      | 6.3                       | 2.5         | Voltage Regulator  |
| 6082♦  | Low-Mu Twin Triode        | 36                | 8BD                      | 26.5                      | 0.6         | Voltage Regulator  |
| 6101♦<br>6101/<br>6J6WA♦                           | Medium-Mu Twin Triode     | 5C                | 7BF                      | 6.3                       | 0.45        | Class A Amplifier  |
| 6111♦  | Medium-Mu Twin Triode     | submin-<br>lature | 8DG                      | 6.3                       | 0.3         | Class A Amplifier  |
| 6112♦  | High-Mu Twin Triode       | submin-<br>lature | 8DG                      | 6.3                       | 0.3         | Class A Amplifier  |
| 6136♦  | Sharp-Cutoff Pentode      | 5C                | 7BK                      | 6.3                       | 0.3         | Class A Amplifier  |
| 6186♦<br>6186/<br>6AQ5WA♦<br>6186W♦                | Sharp-Cutoff Pentode      | 5C                | 7BD                      | 6.3                       | 0.3         | Class A Amplifier  |
| 6189♦  | Medium-Mu Twin Triode     | 6B                | 9A                       | 12.6<br>6.3               | 0.15<br>0.3 | Class A Amplifier  |
| 6197♦  | Power Pentode             | 6E                | 9BV                      | 6.3                       | 0.65        | Class A Amplifier  |
| 6202♦  | Twin Diode                | 5D                | 5BS                      | 6.3                       | 0.6         | Full-Wave Rectifier  |
| 6206♦  | Semiremote-Cutoff Pentode | submin-<br>lature | 8DC                      | 6.3                       | 0.15        | Class A Amplifier  |
| 6211♦  | Medium-Mu Twin Triode     | 6B                | 9A                       | 12.6<br>6.3               | 0.15<br>0.3 | Class A Amplifier  |

♦ Industrial type

| Plate<br>Volts   | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA        | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduct-<br>ance<br>Micromhos | Amplifi-<br>cation<br>Factor   | Power        |                      | RCA<br>Type  |
|--|--|-------------------------|--------------------------------------|------------------------------------|-------------------------------------|---|--------------------------------|--------------|----------------------|--|
|  |  |                         |                                      |                                    |                                     |   |                                | Load<br>Ohms | Out-<br>put<br>Watts |  |
| 150  | 60Ω                                    | —                       | —                                    | 25                                 | 1700                                | 25000                                   | 43                             | —            | —                    | 5842/<br>417A♦                                     |
| 100  | 470Ω                                   | —                       | —                                    | 4.8                                | 7950                                | 3400                                    | 27                             | (each unit)  |                      | 5844♦  |
| 160  | 600Ω                                   | 160                     | 4.5                                  | 13                                 | —                                   | 12500                                   | —                              | —            | —                    | 5847/<br>404A♦                                     |
| 250  | -14V                                   | 250                     | 4.3                                  | 75                                 | 30000                               | 6100                                    | —                              | 2500         | 6.7                  | 5881   |
| 350  | -18V                                   | 250                     | 2.5                                  | 53                                 | 48000                               | 5200                                    | —                              | 4200         | 11.3                 |  |
| 150 RMS each plate   |  |                         |                                      | DC Output Current = 18 mA          |                                     |   |                                |              |                      | 5896♦  |
| 100  | 120Ω                                   | 100                     | 2.2                                  | 7.2                                | 260000                              | 4500                                    | —                              | —            | —                    | 5899♦  |
| 100  | 270Ω                                   | 100                     | 2.2                                  | 30                                 | 15000                               | 4200                                    | —                              | 3000         | 1                    | 5902♦  |
| 67.5   | 0V                                     | 67.5                    | —                                    | —                                  | —                                   | 2000                                    | (grid No.4 voltage = -4 volts) |              |                      | 5915♦  |
| 100  | 50Ω*                                   | —                       | —                                    | 9.5                                | 6500                                | 1100                                    | (grid No.4 voltage = 0 volts)  |              |                      |  |
| * Common to both units                                     |  |                         |                                      |                                    |                                     |   |                                |              |                      | 5964♦  |
| For other characteristics, refer to Type 6A95A             |  |                         |                                      |                                    |                                     |   |                                |              |                      | 6005♦<br>6005/<br>6A95W<br>6095♦<br>6005/<br>6A95♦ |
| 100  | 150Ω                                   | —                       | —                                    | 6.5                                | 6500                                | 5400                                    | 35                             | —            | —                    | 6021♦  |
| 250  | -4V                                    | —                       | —                                    | 3                                  | 25000                               | 1750                                    | 44                             | —            | —                    | 6072♦<br>6072A♦                                    |
| For other characteristics, refer to Type OA2               |  |                         |                                      |                                    |                                     |   |                                |              |                      | 6073♦<br>6073/<br>OA2♦                             |
| For other characteristics, refer to Type OB2               |  |                         |                                      |                                    |                                     |   |                                |              |                      | 6074♦<br>6074/<br>OB2♦                             |
| For other characteristics, refer to Type 6080              |  |                         |                                      |                                    |                                     |   |                                |              |                      | 6080WA♦  |
| For other characteristics, refer to Type 6080              |  |                         |                                      |                                    |                                     |   |                                |              |                      | 6082♦  |
| For other characteristics, refer to Type 6J6A              |  |                         |                                      |                                    |                                     |   |                                |              |                      | 6101♦<br>6101/<br>6J6WA♦                           |
| 100  | 220Ω                                   | —                       | —                                    | 8.5                                | 4000                                | 5000                                    | 20                             | —            | —                    | 6111♦  |
| 150  | 820Ω                                   | —                       | —                                    | 1.75                               | —                                   | 2500                                    | 70                             | —            | —                    | 6112♦  |
| For other characteristics, refer to Type 6AU6A             |  |                         |                                      |                                    |                                     |   |                                |              |                      | 6136♦  |
| For other characteristics, refer to Type 6AG5              |  |                         |                                      |                                    |                                     |   |                                |              |                      | 6186/<br>6186♦<br>6AG5WA♦<br>6186W♦                |
| For other characteristics, refer to Type 12AU7A            |  |                         |                                      |                                    |                                     |   |                                |              |                      | 6189♦  |
| 250  | -3V                                    | 250                     | 70                                   | 30                                 | 90000                               | 11000                                   | —                              | —            | —                    | 6197♦  |
| 325 RMS, 4 μF input filter<br>450 RMS, 8 henry input choke |  |                         |                                      | 50 (each plate)<br>50 (each plate) |                                     |   |                                |              |                      | 6202♦  |
| 100  | 120Ω                                   | 100                     | 2.2                                  | 7.2                                | 260000                              | 4500                                    | —                              | —            | —                    | 6206♦  |
| 100  | 470Ω                                   | —                       | —                                    | 4.6                                | 7500                                | 3600                                    | 27                             | (each unit)  |                      | 6211♦  |

| RCA Type        | Name                                     | Out-line          | Terminal Dia-gram | Heater or Filament (F) |              | Use<br>Values to right give operating conditions and characteristics for indicated typical use |
|-----------------|--|-------------------|-------------------|------------------------|--------------|--|
|                 |  |                   |                   | Volts                  | Amperes      |  |
|                 |  |                   |                   |                        |              |  |
| 6336A♦          | Low-Mu Twin Triode                       | 37                | 8B2               | 6.3                    | 5.0          | Class A Amplifier  |
| 6350♦           | Medium-Mu Twin Triode                    | 6E                | 9CZ               | 12.6<br>6.3            | 0.3<br>0.6   | Class A Amplifier  |
| 6360♦<br>6360A♦ | Twin Tetrode                             | 6G                | 6360              | 12.6<br>6.3            | 0.41<br>0.82 | Class AB <sub>1</sub> Power Amplifier  |
| 6386♦           | Medium-Mu Twin Triode                    | 6A                | 8CJ               | 6.3                    | 0.35         | Class A Amplifier  |
| 6417♦           | VHF Beam Power Tube                      | 6E                | 9K                | 12.6                   | 0.375        | RF Power Amplifier   |
| 6485♦           | Sharp-Cutoff Pentode                     | 5C                | 7CC               | 6.3                    | 0.45         | Class A Amplifier  |
| 6626/<br>0A2WA♦ | Glow-Discharge Tube                      | 5D                | 5B0               | —                      | —            | Voltage Regulator  |
| 6660/<br>6BA6♦  | Remote-Cutoff Pentode                    | 5C                | 7BK               | 6.3                    | 0.3          | Class A Amplifier  |
| 6662/<br>6BJ6♦  | Remote-Cutoff Pentode                    | 5C                | 7CM               | 6.3                    | 0.15         | Class A Amplifier  |
| 6663/<br>6AL5♦  | Twin Diode                               | 5B                | 6BT               | 6.3                    | 0.3          | Half-Wave Rectifier  |
| 6664/<br>6AB4♦  | High-Mu Triode                           | 5C                | 5CE               | 6.3                    | 0.15         | Class A Amplifier  |
| 6676/<br>6CB6A♦ | Sharp-Cutoff Pentode                     | 5C                | 7CM               | 6.3                    | 0.3          | Class A Amplifier  |
| 6677/<br>6CL6♦  | Power Pentode                            | 6E                | 9BV               | 6.3                    | 0.65         | Class A Amplifier  |
| 6678/<br>6U8A♦  | Medium-Mu Triode<br>Sharp-Cutoff Pentode | 6B                | 9AE               | 6.3                    | 0.45         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 6688A♦          | Sharp-Cutoff Pentode                     | 6A                | 9EQ               | 6.3                    | 0.3          | Class A Amplifier  |
| 6887♦           | Twin Diode                               | 5A                | 6BT               | 6.3                    | 0.2          | Half-Wave Rectifier  |
| 6922/<br>E88CC♦ | Medium-Mu Twin Triode                    | 6B                | 9AJ               | 6.3                    | 0.3          | Class A Amplifier  |
| 6977♦           | Indicator Triode                         | submini-<br>ature | 6977              | 1.0F                   | 0.03         | Logic Level Indicator  |
| 7027            | Beam Power Tube                          | 19F               | 8HY               | 6.3                    | 0.9          | Push-Pull Class AB <sub>1</sub> Amplifier<br>Push-Pull Class AB <sub>1</sub> Amplifier         |
| 7044♦           | Medium-Mu Twin Triode                    | 6E                | 9H                | 6.3                    | 0.9          | Class A Amplifier  |
| 7054♦           | Power Pentode                            | 6B                | 9GK               | 13.5                   | 0.275        | Class A Amplifier  |
| 7055♦           | Twin Diode                               | 5B                | 6BT               | 13.5                   | 0.155        | Half-Wave Rectifier  |
| 7056♦           | Sharp-Cutoff Pentode                     | 5C                | 7CM               | 13.5                   | 0.15         | Class A Amplifier  |
| 7057♦           | Medium-Mu Twin Triode                    | 6B                | 9AJ               | 13.5                   | 0.18         | Class A Amplifier  |
| 7258♦           | High-Mu Twin Triode                      | 6B                | 9EP               | 13.5                   | 0.155        | Class A Amplifier  |
| 7060♦           | Medium-Mu Triode<br>Power Pentode        | 6B                | 9DA               | 13.5                   | 0.28         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 7061♦           | Beam Power Tube                          | 6E                | 9EU               | 13.5                   | 0.21         | Class A Amplifier  |
| 7167♦           | Sharp-Cutoff Tetrode                     | 5C                | 7EW               | 13.5                   | 0.09         | VHF Class A Amplifier  |
| 7258♦           | Medium-Mu Triode<br>Sharp-Cutoff Pentode | 6B                | 9DA               | 13.5                   | 0.21         | Triode Unit as Class A Amplifier<br>Pentode Unit as Class A Amplifier                          |
| 7308♦           | Medium-Mu Twin Triode                    | 6B                | 9AJ               | 6.3                    | 0.335        | Class A Amplifier  |
| 7360♦           | Beam Deflection Tube                     | 6E                | 9KS               | 6.3                    | 0.35         | Class A Amplifier  |

♦ Industrial type

| Plate Volts   | Grid Bias or Cathode Resistor | Screen Grid Volts              | Screen Grid Current mA | Plate Current mA | AC Plate Resistance Ohms | Trans-conductance Micromhos | Amplification Factor   | Power                |              | RCA Type        |
|---|-------------------------------|--------------------------------|------------------------|------------------|--------------------------|-----------------------------|--|----------------------|--------------|-----------------|
|   |                               |                                |                        |                  |                          |                             |  | Load Ohms            | Output Watts |                 |
| 190   | 200Ω                          | —                              | —                      | —                | 200                      | 13500                       | 2.7  | (each unit)          |              | 6336A♦          |
| 150   | -5V                           | —                              | —                      | 11               | 3900                     | 4600                        | 18   | (each unit)          |              | 6350♦           |
| 300   | -21.5V                        | 200                            | 1.2                    | 30               | —                        | 3300                        | —  | 10000 plate to plate |              | 6360♦<br>6360A♦ |
| 100   | 200Ω                          | —                              | —                      | 9.6              | 4250                     | 4000                        | 17   | —                    | —            | 6386♦           |
| For other characteristics, refer to Type 5763       |                               |                                |                        |                  |                          |                             |  |                      |              | 6417♦           |
| For other characteristics, refer to Type 6AH6       |                               |                                |                        |                  |                          |                             |  |                      |              | 6485♦           |
| For other characteristics, refer to Type OA2        |                               |                                |                        |                  |                          |                             |  |                      |              | 6626/<br>OA2WA♦ |
| For other characteristics, refer to Type 6BA6       |                               |                                |                        |                  |                          |                             |  |                      |              | 6660/<br>6BA6♦  |
| For other characteristics, refer to Type 6BJ6       |                               |                                |                        |                  |                          |                             |  |                      |              | 6662/<br>6BJ6♦  |
| For other characteristics, refer to Type 6AL5       |                               |                                |                        |                  |                          |                             |  |                      |              | 6AL5♦<br>6663/  |
| For other characteristics, refer to Type 6AB4       |                               |                                |                        |                  |                          |                             |  |                      |              | 6664/<br>6AB4♦  |
| For other characteristics, refer to Type 6CB6A      |                               |                                |                        |                  |                          |                             |  |                      |              | 6676/<br>6CB6A♦ |
| For other characteristics, refer to Type 6CL6       |                               |                                |                        |                  |                          |                             |  |                      |              | 6677/<br>6CL6♦  |
| For other characteristics, refer to Type 6U8A       |                               |                                |                        |                  |                          |                             |  |                      |              | 6678/<br>6U8A♦  |
| 190   | 630Ω                          | 160                            | 3.3                    | 13               | 90000                    | 16500                       | grid-No.3 voltage = 0 volts<br>grid-No.1 supply voltage = +9 volts |                      | 6688A♦       |                 |
| 360 RMS (max.) each plate                           |                               | —DC Plate Current = 10 mA max. |                        |                  |                          |                             |  |                      |              | 6887♦           |
| 100   | 680Ω                          | —                              | —                      | 15               | —                        | 12500                       | 33   | (each unit)          |              | 6922/<br>E88CC♦ |
| 50  | 0V<br>-3V                     | R <sub>g</sub> = 100,000Ω      |                        | 585μA<br>5μA     | —                        | —                           | —  | —                    | —            | 6977♦           |
| 450   | -30V                          | 350                            | 3.4□                   | 95□              | —                        | —                           | —  | 6000                 | 50†          | 7027            |
| 400   | 200Ω                          | 300                            | 7□                     | 112□             | —                        | —                           | —  | 6600                 | 32†          |                 |
| 380   | 180Ω                          | 380                            | 5.6□                   | 138□             | —                        | —                           | —  | 4500                 | 36†          |                 |
| 410   | 220Ω                          | —                              | Cath. mA, 134          |                  | —                        | —                           | —  | 8000                 | 24†          | 7044♦           |
| 120   | -2V                           | —                              | —                      | 36               | 1750                     | 12000                       | 21   | (each unit)          |              |                 |
| For other characteristics, refer to Type 8077/7054  |                               |                                |                        |                  |                          |                             |  |                      |              | 7054♦           |
| 117 RMS each plate                                  |                               | —DC plate current 9 mA.        |                        |                  |                          |                             |  |                      |              | 7055♦           |
| 200   | 180Ω                          | 150                            | 2.8                    | 9.5              | 600000                   | 6200                        | —  | —                    | —            | 7056♦           |
| 150   | 220Ω                          | —                              | —                      | 10               | 5300                     | 6800                        | 36   | (each unit)          |              | 7057♦           |
| 250   | -2V                           | —                              | —                      | 1.25             | 61000                    | 1650                        | 100  | (each unit)          |              | 7058♦           |
| 150   | 150Ω                          | —                              | —                      | 9                | 8200                     | 4900                        | 40   | —                    | —            | 7060♦           |
| 200   | 82Ω                           | 125                            | 3.4                    | 15               | 150000                   | 7000                        | —  | —                    | —            |                 |
| 200   | -10V                          | 200                            | 9                      | 35.5             | 60000                    | 4200                        | —  | 5000                 | 3            | 7061♦           |
| 125   | -1V                           | 80                             | 1.4                    | 10               | 125000                   | 8000                        | —  | —                    | —            | 7167♦           |
| For other characteristics, refer to Type 6AN8A      |                               |                                |                        |                  |                          |                             |  |                      |              | 7258♦           |
| For other characteristics, refer to Type 6922/E88CC |                               |                                |                        |                  |                          |                             |  |                      |              | 7308♦           |
| 150 each plate                                      | 150Ω                          | 175                            | 2.1                    | 8.5              | —                        | 5400 both plates tied       | deflection electrode voltage = 25 volts                            |                      | 7360♦        |                 |

† For two tubes at stated plate-to-plate load.

□ For two tubes.

| RCA<br>Type                        | Name                         | Out-<br>line | Terminal<br>Dia-<br>gram | Heater or<br>Filament (F) |                 | Use<br>Values to right give operat-<br>ing conditions and character-<br>istics for indicated typical use |
|------------------------------------|------------------------------|--------------|--------------------------|---------------------------|-----------------|--|
|                                    |                              |              |                          | Volts                     | Amperes         |  |
|                                    |                              |              |                          | 7591                      | Beam Power Tube |  |
| 7695                               | Beam Power Tube              | 13D          | 9PX                      | 50                        | 0.15            | Class A Amplifier<br>Push-Pull Class AB <sub>1</sub> Amplifier   |
| 7717/<br>6CY5♦                     | Sharp-Cutoff Tetrode         | 5C           | 7EW                      | 6.3                       | 0.2             | Class A Amplifier  |
| 7724/<br>14GT8♦                    | Twin-Diode<br>High-Mu Triode | 6B           | 9KR                      | 14                        | 0.15            | Triode Unit as Class A Amplifier   |
| 7898♦                              | High-Mu Twin Triode          | 6B           | 9EP                      | 13.5                      | 0.15            | Class A Amplifier  |
| 8058♦                              | Nuvistor, High-Mu Triode     | 1A1          | 12CT                     | 6.3                       | 0.135           | Class A Amplifier  |
| 8136♦                              | Sharp-Cutoff Pentode         | 5C           | 7CM                      | 6.3                       | 0.3             | Class A Amplifier  |
| 8303♦                              | Nuvistor, Power Triode       | 1            | 12AQ                     | 6.3                       | 0.16            | Class A Amplifier  |
| 8532♦<br>8532/<br>6J4WA♦<br>8532W♦ | High-Mu Triode               | 5C           | 7BQ                      | 6.3                       | 0.4             | Class A Amplifier  |
| 8627♦<br>8627A♦                    | Nuvistor, Power Triode       | 1A2          | 12CT                     | 6.3                       | 0.15            | Class A Amplifier  |
| 8628♦                              | Nuvistor, High-Mu Triode     | 1            | 12AQ                     | 6.3                       | 0.1             | Class A Amplifier  |
| 8808♦                              | Nuvistor, High-Mu Triode     | 1A3          | 8808                     | 6.3                       | 0.34            | Class A Amplifier  |
| 9001♦                              | Detector Amplifier Pentode   | 5F           | 7BD                      | 6.3                       | 0.15            | Class A Amplifier  |
| 9002♦                              | Medium-Mu Triode             | 5F           | 7BS                      | 6.3                       | 0.15            | Detector; Amplifier, Oscillator  |
| 9003♦                              | RF Pentode                   | 5F           | 7BP                      | 6.3                       | 0.15            | Class A Amplifier  |
| 9005♦                              | UHF Diode                    | acorn        | 5BG                      | 3.6                       | 0.165           | Half-Wave Rectifier  |
| 9006♦                              | UHF Diode                    | 5F           | 6BH                      | 6.3                       | 0.15            | Half-Wave Rectifier  |
| EM84/<br>6FG6                      | Electron-Ray Tube            | 6F           | 9GA                      | 6.3                       | 0.27            | Visual Indicator   |

♦ Industrial type

### SAFETY PRECAUTIONS

Electron tubes that operate at potentials exceeding several thousand volts may emit X-radiation.

The high voltages associated with these devices result in production of X-radiation which may constitute a health hazard on prolonged exposure at close range unless the tube is adequately shielded. Equipment design must provide for this shielding.

| Plate<br>Volts   | Grid Bias<br>or<br>Cathode<br>Resistor | Screen<br>Grid<br>Volts | Screen<br>Grid<br>Cur-<br>rent<br>mA | Plate<br>Cur-<br>rent<br>mA | AC Plate<br>Resist-<br>ance<br>Ohms | Trans-<br>conduct-<br>ance<br>Micromhos | Amplifi-<br>cation<br>Factor | Power                      |                      | RCA<br>Type                        |
|--|--|-------------------------|--------------------------------------|-----------------------------|-------------------------------------|---|------------------------------|----------------------------|----------------------|------------------------------------|
|  |  |                         |                                      |                             |                                     |   |                              | Load<br>Ohms               | Out-<br>put<br>Watts |                                    |
| 300  | -10V                                   | 300                     | 8                                    | 60                          | 29000                               | 10200                                   | —                            | 3000                       | 11                   | 7591                               |
| 450  | 200Ω                                   | 400                     | 11.5□                                | 82□                         | —                                   | —                                       | —                            | 9000                       | 28†                  |                                    |
| 130  | -11V                                   | 130                     | 5                                    | 100                         | 7000                                | 11000                                   | —                            | 1100                       | 4.5                  | 7695                               |
| 140  | 50Ω                                    | 140                     | 9□                                   | 210□                        | —                                   | —                                       | —                            | 1500                       | 10†                  |                                    |
| For other characteristics, refer to Type 6CY5                                |  |                         |                                      |                             |                                     |   |                              |                            |                      | 7717/<br>6CY5♦                     |
| For other characteristics, refer to Type 14GT8                               |  |                         |                                      |                             |                                     |   |                              |                            |                      | 7724/<br>14GT8♦                    |
| 250  | 200Ω                                   | —                       | —                                    | 10                          | 10900                               | 5500                                    | 60                           | (each unit)                |                      | 7898♦                              |
| 110  | 47Ω                                    | —                       | —                                    | 10                          | 5600                                | 12400                                   | 70                           | —                          |                      | 8058♦                              |
| For other characteristics, refer to Type 6DK6                                |  |                         |                                      |                             |                                     |   |                              |                            |                      | 8136♦                              |
| 150  | 560Ω                                   | —                       | —                                    | 7                           | 5000                                | 6000                                    | 30                           | —                          |                      | 8203♦                              |
| 150  | 100Ω                                   | —                       | —                                    | 13.5                        | 4800                                | 11000                                   | 52.5                         | —                          |                      | 8532♦<br>8532/<br>6J4WA♦<br>8532W♦ |
| 110  | 47Ω                                    | —                       | —                                    | 11.5                        | 5400                                | 13000                                   | 70                           | —                          |                      | 8627♦<br>8627A♦                    |
| 120  | 200Ω                                   | —                       | —                                    | 1.5                         | 41000                               | 3100                                    | 127                          | —                          |                      | 8628♦                              |
| 200  | 68Ω                                    | —                       | —                                    | 15                          | 6400                                | 18000                                   | 100                          | —                          |                      | 8808♦                              |
| 250  | -3V                                    | 100                     | 0.7                                  | 2.0                         | 1 MΩ<br>min.                        | 1400                                    | —                            | —                          |                      | 9001♦                              |
| 250  | -7V                                    | —                       | —                                    | 6.3                         | 11400                               | 2200                                    | 25                           | —                          |                      | 9002♦                              |
| 250  | -3V                                    | 100                     | 2.7                                  | 6.7                         | 700000                              | 1800                                    | —                            | —                          |                      | 9003♦                              |
| 117 RMS max.   |  |                         |                                      |                             | DC Output Current 1.0 mA max.       |   |                              | —                          |                      | 9005♦                              |
| 270 RMS  |  |                         |                                      |                             | DC Output Current 5.0 mA            |   |                              | —                          |                      | 9006♦                              |
| Triode Plate Supply Volts, 250   |  |                         |                                      |                             | Fluorescent-Target Volts, 250       |   |                              | —                          |                      | EM84/<br>6FG6                      |
| Triode-Plate Resistance, 1 MΩ  |  |                         |                                      |                             | Triode-Grid Resistance, 0.47 MΩ     |   |                              | —                          |                      |                                    |
| Triode Grid-Supply Volts, -22  |  |                         |                                      |                             | Triode Plate mA, 0.06               |   |                              | Fluorescent Target mA, 1.6 |                      |                                    |
| Max. Length of Dark Part of Target, when triode grid resistor = 0, 1.14 inch |  |                         |                                      |                             |                                     |   |                              |                            |                      |                                    |

† For two tubes at stated plate to plate load.

□ For two tubes.

### SAFETY PRECAUTIONS

Precautions must be exercised during the servicing of equipment employing these devices to assure that the high voltage is adjusted to the recommended value and that any shielding components are restored to their intended positions before the equipment is operated.

**Caution:** Operation of this tube outside of the maximum values indicated may result in either temporary or permanent changes in the X-radiation characteristics of the tube. Equipment design must be such that these maximum values are not exceeded.

**Note:** For Safety Precautions that apply to all tubes, refer to page 93.

# Terminal Diagrams For Receiving Tubes

THE following pages contain comprehensive listings of domestic and foreign entertainment and industrial receiving tubes cross-referenced to a particular terminal diagram.

The first index lists the terminal diagrams in numerical-alphabetical sequence and cross-references each diagram to receiving tube types having the same diagram.

The second index lists receiving tube types in numerical-alphabetical-numerical sequence and cross-references each type to its respective terminal diagram.

These listings can be used as an initial approach to tube interchangeability. However, tube interchangeability is not implied. Before any interchangeability is attempted, a comparison must be made of all essential data, including maximum ratings, performance characteristics and mechanical characteristics. Many types listed in these indexes are currently in RCA's line; consequently, data are included in this manual. For those tube types not currently in RCA's line, it will be necessary to consult other data sources.

Terminal diagrams are shown immediately following the indexes.

## TERMINAL DIAGRAM vs. TYPE NUMBER

|              |            |           |            |            |
|--------------|------------|-----------|------------|------------|
| <b>1AY2</b>  | <b>4CG</b> | <b>4D</b> | <b>4R</b>  | <b>5AM</b> |
| 1AY2         | 6AU4GT     | 6A3       | OZ4A       | 45Z3       |
| 1AY2A        | 6AU4GTA    | 10        | OZ4G       |            |
|              | 6AX4GT     | 20        |            | <b>5AP</b> |
|              | 6AX4GTB    | 26        |            | 1A3        |
| <b>3C</b>    | 6CQ4       | 30        | <b>4V</b>  | DA90       |
| 1B3GT        | 6DA4       | 31        | 1C21       |            |
| 1G3GT/1B3GT  | 6DE4       | 40        | OA4G       |            |
| 1G3GTA/1B3GT | 6DM4A      | 45        |            | <b>5AY</b> |
| 1J3          | 6GK17      | 50        | <b>5A</b>  | 6D4        |
| 1K3/1J3      | 6W4GT      |           | 27         |            |
| 1K3A/1J3     | 12AX4GT    | <b>4F</b> | 37         | <b>5B</b>  |
| 1N2A         | 12AX4GTA   | 11        |            | 47         |
| 8016         | 12AX4GTB   |           | <b>5AA</b> | <b>5BC</b> |
| DY30         | 12D4       | <b>4G</b> | 35Z4GT     | 955        |
| U41          | 12DM4      | 1V        | 117Z4GT    |            |
|              | 12DM4A     | A61       | U74        | <b>5BE</b> |
| <b>4AA</b>   | 17AX4GT    | PY81      | U76        | 959        |
| 1LE3         | 17AX4GTA   | PY83      |            | <b>5BG</b> |
|              | 17D4       | PY88      | <b>5AB</b> | 9005       |
| <b>4AJ</b>   | 17DE4      | PY800     | 7Y4        |            |
| OA3          | 17DM4      | V153      | 7Z4        |            |
| OA3A         | 17DM4A     |           |            | <b>5AC</b> |
| OC3          | 19AU4      | <b>4K</b> | 7B4        | 7B0        |
| OC3A         | 19AU4GTA   | 22        | 14A4       | 5651A      |
| OD3          | 22DE4      | 32        |            | 5651WA     |
| OD3A         | 25AX4GT    |           | <b>5AD</b> | 6073       |
|              | 25W4GT     | <b>4M</b> | 1LA4       | 6073/OA2   |
|              |            | 1A4P      | 1LB4       | 6074       |
| <b>4C</b>    |            | 1B4P      |            | 6074/OB2   |
| 5Z3          | <b>4CK</b> | 34        | <b>5AG</b> | 6626/OA2WA |
| 80           | 58Z3       |           | 1LH4       | OA2        |
| 83           |            | <b>4R</b> |            | OA2WA      |
|              |            | OZ4       | <b>5AL</b> | OB2        |
| <b>4CB</b>   | <b>4D</b>  |           | 35Y4       | OB2WA      |
| 117Z3        | 2A3        |           |            | OC2        |



|  |  |   |  |  |
|--|--|---|--|--|
| <b>5BQ</b><br>35W4<br>36AM3<br>36AM3A<br>36AM3B<br>50DC4<br>HY90   | <b>5E</b><br>35<br>36<br>15  | <b>5Y</b><br>1E5GP<br>1N5GT<br>1P5GT<br>DF33<br>Z14   | <b>6AM</b><br>25CU6<br>HD94<br>HD96  | <b>6BW</b><br>1DN5<br>1U5<br>DAF92                                     |
| <b>5BS</b><br>6X4<br>6X4W<br>12X4<br>6202<br>EZ90<br>EZ900<br>HZ90<br>U78<br>U707<br>VSM70                                   | <b>5F</b><br>38<br>39/44   | <b>5Z</b><br>1H5GT<br>HD14  | <b>6AR</b><br>1L4<br>1T4<br>1U4<br>DE91<br>DF904<br>W17  | <b>6BX</b><br>3V4<br>DL94<br>N19                                       |
| <b>5BT</b><br>6BG6G<br>6CD6G<br>6CD6GA<br>6DN6<br>6EX6<br>19BG6G<br>19BG6GA<br>21EX6<br>25CD6GA<br>25CD6GB<br>25DN6<br>25EC6 | <b>5K</b><br>1F4<br>33   | <b>6A</b><br>48   | <b>6AS</b><br>6B5  | <b>6C</b><br>19  |
| <b>5C</b><br>46<br>49<br>6485<br>8136  | <b>5L</b><br>5V4G<br>5V4GA   | <b>6AA</b><br>7A5<br>7C5<br>14A5<br>14C5<br>32A5<br>50A5<br>EL22<br>KT81<br>N148  | <b>6AU</b><br>1S5<br>AD17<br>DAF91   | <b>6CC</b><br>6AR5   |
| <b>5CE</b><br>6AB4<br>6664/6AB4<br>EC92  | <b>5M</b><br>6F5<br>6F5GT<br>12F5GT<br>H63   | <b>6AB</b><br>6SF5<br>12SF5<br>12SF5GT  | <b>6AX</b><br>1LD5   | <b>6CE</b><br>5663   |
| <b>5D</b><br>6Z4<br>84/6Z4   | <b>5Q</b><br>5X4G<br>5Y4G<br>5Y4GA<br>5Y4GT  | <b>6AD</b><br>35Z5GT<br>45Z5GT  | <b>6B</b><br>2A5<br>41<br>42<br>43   | <b>6CK</b><br>6AU5GT<br>6AV5GA<br>6AV5GT<br>6FW5<br>12AV5GA<br>25AV5GA |
| <b>5DA</b><br>5AR4/GZ34<br>GZ32<br>GZ34<br>GZ37<br>R-52<br>U54<br>U70  | <b>5R</b><br>1D5GT<br>1G4GT  | <b>6AE</b><br>7B5   | <b>6BA</b><br>3LF4   | <b>6CN</b><br>6BY5GA   |
| <b>5DE</b><br>3DG4   | <b>5S</b><br>1H4G<br>6B4G  | <b>6AF</b><br>1Q5GT   | <b>6BG</b><br>6C4<br>EC90<br>L77<br>M8080<br>QA2401<br>QL77<br>V741  | <b>6CO</b><br>6012   |
| <b>5E</b><br>24A   | <b>5T</b><br>2T4<br>5AS4<br>5AS4A<br>5AU4<br>5AW4<br>5AZ4<br>5R4GYB<br>5U4G<br>5U4GB<br>5V3<br>5V3A/5AU4<br>5W4<br>5W4GT<br>5Y3G<br>5Y3GT<br>5Z4<br>2076/5R4GYB<br>GZ30<br>RJ2<br>U50<br>U52 | <b>6AM</b><br>6BQ6GT<br>6BQ6GTB/6CU6<br>6CU6<br>6DQ6A<br>6DQ6B<br>6GB3A<br>6GB6<br>6GB7<br>6GW6<br>6GW6/6DQ6B<br>12BQ6GTB/12CU6<br>12CU6<br>12DQ6A<br>12DQ6B<br>12GB3<br>12GB6<br>12GB7<br>12GW6/12DQ6B<br>17BQ6GTB<br>17DQ6A<br>17GB3<br>17GW6/17DQ6B<br>25BQ6GT<br>25BQ6GTB/25CU6 | <b>6BH</b><br>9006   | <b>6D</b><br>25B5  |
|  | <b>5U</b><br>6K5GT   | <b>6B</b><br>2A5<br>41<br>42<br>43  | <b>6BS</b><br>2050<br>2050A  | <b>6E</b><br>25Y5<br>25Z5  |
|  | <b>5Y</b><br>1D5GP   | <b>6B</b><br>2A5<br>41<br>42<br>43  | <b>6BT</b><br>3AL5<br>6AL5<br>12AL5<br>5726<br>6663/6AL5<br>6887<br>7055<br>D2M9<br>D63<br>D152<br>EAA91<br>EB91<br>FAA91<br>HAA91<br>QA2404<br>XXA-91 | <b>6EC4</b><br>6EC4/EY500<br>42EC4A/PY500<br>EY500<br>PY500            |
|  |  | <b>6B</b><br>2A5<br>41<br>42<br>43  |  | <b>6F</b><br>6C6<br>6D6<br>78  |
|  |  | <b>6B</b><br>2A5<br>41<br>42<br>43  |  | <b>6G</b><br>2A6<br>12Z3<br>75   |
|  |  | <b>6B</b><br>2A5<br>41<br>42<br>43  |  | <b>6K</b><br>6Z5   |
|  |  | <b>6B</b><br>2A5<br>41<br>42<br>43  |  | <b>6L</b><br>1A6<br>1C6  |

|   |  |   |   |  |
|---|--|---|---|--|
| <b>6M</b><br>1B5/25S  | <b>7AC</b><br>6W6GT<br>6Y6GA/6Y6G<br>7EY6<br>12EN6<br>12L6GT<br>12V6GT<br>12W6GT<br>25C6G<br>25L6<br>25L6GT/25W6GT<br>25W6GT<br>35L6GT<br>50C6G<br>50L6GT<br>7408<br>7581A<br>EL37<br>KT-32<br>KT66<br>KT71<br>OSW3106 | <b>7AV</b><br>1S4<br>DL91   | <b>7BF</b><br>59G4<br>ECC91<br>M8081<br>T2M05   | <b>7BT</b><br>3AV6<br>4AV6<br>6AQ6<br>6AT6<br>6AV6<br>6BF6<br>12AE6<br>12AE6A<br>12AJ6<br>12AT6<br>12AV6<br>12BF6<br>12FK6<br>12FM6<br>18FY6<br>18FY6A<br>26C6<br>DH77<br>EBC90<br>EBC91<br>HBC90<br>HBC91   |
| <b>6Q</b><br>6AC5GT<br>6C5<br>6C5GT<br>6J5<br>6J5GT<br>6L5G<br>6P5GT<br>12J5GT<br>25AC5GT<br>884<br>L63<br>L63B | <b>7AF</b><br>1F7G   | <b>7AW</b><br>1619  | <b>7B</b><br>12SF7<br>6A6<br>6E6<br>53  | <b>7BK</b><br>3AU6<br>3BA6<br>4AU6<br>6AH6<br>6AH6WA<br>6AK6<br>6AU6<br>6AU6A<br>6AU6WB<br>6BA6/EF93<br>6BD6<br>6HR6<br>6HS6<br>12AC6<br>12AF6<br>12AU6<br>12BA6<br>12BD6<br>12BL6<br>12CX6<br>12DZ6<br>12EA6<br>12EK6<br>12EK6/12DZ6/<br>12EA6<br>18GD6A<br>19HR6<br>19HS6<br>19MR9<br>26A6<br>5749<br>6669/6BA6<br>7543<br>EF93<br>EF94<br>HF93<br>HF94<br>M8108<br>PM04<br>W727<br>XF94 |
| <b>6R</b><br>2E5<br>6AB5/6N5<br>6E5<br>6U5<br>EM35<br>OSW3110<br>Y61  | <b>7AG</b><br>6AD6G<br>6AF6G   | <b>7BA</b><br>3Q4<br>3S4<br>DL92<br>DL95<br>N17<br>N18                      | <b>7BB</b><br>3A4   | <b>7BZ</b><br>5AQ5<br>6AQ5<br>6AQ5A<br>6BF5<br>6DS5<br>6HG5<br>6HR5<br>11DS5<br>12AQ5<br>35B5<br>50B5<br>6005<br>6669/6AQ5A<br>BPM04<br>EL90<br>M8245<br>N727  |
| <b>6S</b><br>6AX5GT<br>6X5<br>6X5GT<br>6ZY5G<br>EZ35  | <b>7AH</b><br>6AE6G  | <b>7BC</b><br>3A5   | <b>7BD</b><br>3BC5<br>3BC5/3CE5<br>3CE5<br>4BC5<br>6AG5<br>6AK5/EF95<br>6AN5<br>6BC5/6CE5<br>6CE5<br>6RHH2<br>408A<br>5654<br>6186<br>9001<br>9003<br>DP61<br>EF95<br>EF96<br>EF905<br>PM05 | <b>7C</b><br>2A7<br>6A7<br>6A7S  |
| <b>6W</b><br>1F6  | <b>7AJ</b><br>7A6  | <b>7BB</b><br>3A4   | <b>7BC</b><br>3A5   | <b>7CC</b><br>18FW6<br>18FW6A  |
| <b>6X</b><br>1A5GT<br>1C5GT<br>1F5G<br>1G5G<br>1J5G<br>1T5GT<br>DL31  | <b>7AK</b><br>1LA6<br>1LC6   | <b>7BB</b><br>3A4   | <b>7BC</b><br>3A5   | <b>7CC</b><br>18FW6<br>18FW6A  |
| <b>7AA</b><br>1H6G  | <b>7AL</b><br>1629   | <b>7BB</b><br>3A4   | <b>7BC</b><br>3A5   | <b>7CC</b><br>18FW6<br>18FW6A  |
| <b>7AB</b><br>1G6GT<br>1J6G<br>1J6GT  | <b>7AM</b><br>1N6G   | <b>7BB</b><br>3A4   | <b>7BC</b><br>3A5   | <b>7CC</b><br>18FW6<br>18FW6A  |
| <b>7AC</b><br>5V6GT<br>6EY6<br>6EZ5<br>6L6<br>6L6G<br>6L6GB<br>6L6GC<br>6V6<br>6V6GT<br>6V6GTA                  | <b>7AO</b><br>1LG5<br>1LN5   | <b>7BB</b><br>3A4   | <b>7BC</b><br>3A5   | <b>7CC</b><br>18FW6<br>18FW6A  |
|   | <b>7AP</b><br>3Q5GT<br>DL33<br>N16   | <b>7BB</b><br>3A4   | <b>7BC</b><br>3A5   | <b>7CC</b><br>18FW6<br>18FW6A  |
|   | <b>7AQ</b><br>1LC5   | <b>7BB</b><br>3A4   | <b>7BC</b><br>3A5   | <b>7CC</b><br>18FW6<br>18FW6A  |
|   | <b>7AT</b><br>1R5<br>DK91<br>X17   | <b>7BB</b><br>3A4   | <b>7BC</b><br>3A5   | <b>7CC</b><br>18FW6<br>18FW6A  |
|   | <b>7AU</b><br>6N6G   | <b>7BB</b><br>3A4   | <b>7BC</b><br>3A5   | <b>7CC</b><br>18FW6<br>18FW6A  |
|   |  | <b>7BF</b><br>5J6<br>5MHH3<br>6J6<br>6J6A<br>6J6WA<br>6MHH3<br>19J6<br>5844 | <b>7BN</b><br>2D21<br>5696<br>5696A<br>5727   | <b>7CH</b><br>3BE6<br>3BY6<br>3CS6<br>4CS6<br>6BE6<br>6BY6<br>6CS6<br>12AD6<br>12BE6<br>12EG6<br>12GA6   |
|   |  | <b>7BR</b><br>6F4   | <b>7BS</b><br>9002  |  |

|            |             |            |            |           |
|------------|-------------|------------|------------|-----------|
| <b>7CH</b> | <b>7CV</b>  | <b>7E</b>  | <b>7FP</b> | <b>7R</b> |
| 18FX6      | 12CN5       | 6F7        | 6FQ5A      | 6I7       |
| 18FX6A     | 12CU5/12C5  |            | 6FY5/EC97  | 6I7G      |
| 26D6       | 12ED5       | <b>7EA</b> | 6GK5/6FQ5A | 6I7GT     |
| 5750       | 12EH5       | 6CR6       | EC95       | 6K7       |
| 5915       | 12FX5       | 12CR6      | EC97       | 6K7G      |
| EH90       | 17C5        |            | PC95       | 6K7GT     |
| EK90       | 17CU5/17C5  | <b>7EG</b> | XC95       | 6S7       |
| HK90       | 19FX5       | 2BN4       | XC97       | 6S7G      |
| HMO4       | 25C5        | 2BN4A      | YC95       | 6U7G      |
| X77        | 25CA5       | 3BN4       |            | 6W7G      |
| X107       | 25EH5       | 3BN4A      | <b>7FQ</b> | 12J7GT    |
| X727       | 25F5A       | 6BN4       | 6FV6       | 12K7GT    |
|            | 32ET5       | 6BN4A      |            | 1620      |
| <b>7CK</b> | 32ET5A      |            | <b>7FZ</b> | A863      |
| 12U7       | 34GD5       | <b>7EK</b> | 35GL6      | EF37      |
|            | 34GD5A      | 12K5       | 50HC6      | KTW63     |
| <b>7CM</b> | 35C5        |            | 50HK6      | KTZ63     |
| 3BZ6       | 35EH5       | <b>7EN</b> |            | W61       |
| 3CB6/3CF6  | 50C5        | 3DT6       | <b>7G</b>  | W63       |
| 3CF6       | 50EH5       | 3DT6A      | 6C7        | Z63       |
| 3DK6       | 50FK5       | 4DT6       |            |           |
| 4BZ6       | 60FX5       | 4DT6A      | <b>7GA</b> | <b>7S</b> |
| 4CB6       | HL92        | 5GX6       | 2FS5       | 6DG6GT    |
| 4DE6       |             | 5HZ6       | 2GU5       | 6F6       |
| 4DK6       | <b>7CY</b>  | 6DT6       | 3FS5       | 6F6G      |
| 4EW6       | 3B4WA       | 6DT6A      | 6FS5       | 6F6GT     |
| 4GM6       | 6GZ5        | 6GX6       | 6GU5       | 6G6G      |
| 4JH6       |             | 6GY6       |            | 6K6GT     |
| 4LU6       | <b>7D</b>   | 6GY6/6GX6  | <b>7GM</b> | 12A6      |
| 5EW6       | 2B7         | 6HZ6       | 2HA5       | 25A6      |
| 5GM6       | 6B7         |            | 2HQ5       | 25A6GT    |
| 5JK6       | 6B7S        | <b>7EW</b> | 3HM5/3HA5  | 25B6G     |
| 5JL6       |             | 2CY5       | 3HQ5       | 1613      |
| 6AS6       | <b>7DC</b>  | 3CY5       | 4HA5       | 1614      |
| 6BH6       | 1L6         | 3EA5       | 4HA5/PC900 | 1621      |
| 6BJ6       |             | 4CY5       | 4HQ5       | 1622      |
| 6BZ6       | <b>7DF</b>  | 6CY5       | 6HA5       | 5824      |
| 6CB6A/6CF6 | 3BN6        | 6EA5       | 6HK5       | 5881      |
| 6CF6       | 4BN6        | 6EV5       | 6HM5/6HA5  | 6550      |
| 6DC6       | 6BN6/6KS6   | 7167       | 6HQ5       | 8417      |
| 6DE6       | 6KS6        | 7717/6CY5  | EC900      | EM840     |
| 6DK6       | 12BN6       |            | LC900      | KT-63     |
| 6EW6       |             | <b>7F</b>  | PC900      | N63       |
| 6GM6       | <b>7DK</b>  | 12A5       | XC900      |           |
| 6JH6       | 2AF4A/2AF4B | <b>7FB</b> |            | <b>7T</b> |
| 6JK6       | 2AF4B/2DZ4  | 12EL6      | <b>7GW</b> | 6L7       |
| 12AW6      | 2DZ4        |            | 17DQ6B     | 6L7G      |
| 12BZ6      | 3AF4A       | <b>7FL</b> |            | 1612      |
| 12DK6      | 3AF4A/3DZ4  | 2EN5       | <b>7H</b>  |           |
| 5725       | 3DZ4        |            | 6D7        | <b>7U</b> |
| 6661/6BH6  | 6AF4        | <b>7FP</b> | 6E7        | 6P7G      |
| 6662/6BJ6  | 6AF4A       | 2ER5       |            |           |
| 6676/6CB6A | 6AN4        | 2FH5       | <b>7K</b>  |           |
| 7056       | 6DZ4        | 2FQ5A      | 12A7       | <b>7V</b> |
| EF190      | 6T4         | 2GK5/2FQ5A |            | 686G      |
|            | EC94        | 3ER5       | <b>7Q</b>  | 6Q7       |
| <b>7CV</b> |             | 3FH5       | 6H6        | 6Q7G      |
| 4GZ5       | <b>7DQ</b>  | 3GK5       | 6H6GT      | 6Q7GT     |
| 6AS5       | 6DL5        | 4GK5       | 12H6       | 6R7       |
| 6CA5       | 6DL5/EL95   | 6ER5       | 25Z6       | 6R7G      |
| 6CU5       | EL95        | 6ES5       | 25Z6GT     | 6R7GT     |
| 6EH5       |             | 6FH5       | 50Y6GT     | 6T7G      |
| 12C5       | <b>7DX</b>  |            | 117Z6GT    | 6V7G      |
| 12CA5      | 50X6        |            | EB34       |           |

|   |   |  |   |   |
|---|---|--|---|---|
| <b>7V</b><br>12Q7GT<br>DH63                                       | <b>8B</b><br>6N7<br>6N7GT<br>6Y7G<br>6Z7G<br>1635   | <b>8C</b><br>1E7GT                         | <b>8EP</b><br>KT88  | <b>8JP</b><br>6DZ7                        |
| <b>7W</b><br>25N6G  |   | <b>8CB</b><br>6S8GT<br>12S8GT              | <b>8ET</b><br>6CA7/EL34<br>6CZ7<br>EL34   | <b>8JX</b><br>12GC6                       |
| <b>7Z</b><br>1A7GT<br>1B7GT<br>1C7G<br>1D7G                       | <b>8BD</b><br>6AS7G<br>6BL7GT<br>6BL7GTA<br>6BX7GT<br>6DN7<br>6EA7<br>6EM7/6EA7<br>6GL7<br>6SL7GT<br>6SN7GT<br>6SN7GTA<br>6SN7GTB<br>10EG7<br>10EM7<br>12SL7GT<br>12SN7GT<br>12SN7GTA<br>12SX7GT<br>13EM7<br>13EM7/15EA7<br>5691<br>5692<br>6080<br>6080WA<br>6082<br>6336A<br>B36<br>B65<br>ECC32<br>ECC35 | <b>8CH</b><br>6AL7GT                       | <b>8EZ</b><br>3A3<br>3A3/3B2<br>3A3A/3B2<br>3A3B<br>3A3C<br>3AW3<br>3CZ3<br>3CZ3A | <b>8K</b><br>6K8<br>6K8G<br>6K8GT<br>12K8 |
| <b>8A</b><br>6A8<br>6A8G<br>6A8GT<br>6D8G<br>12A8GT<br>PH4<br>X63 |   | <b>8CJ</b><br>5670<br>6386                 |   | <b>8KB</b><br>6FE5<br>50FE5               |
| <b>8AA</b><br>70L7GT  |   | <b>8CK</b><br>6AQ7GT<br>ECL180             |   | <b>8KN</b><br>7355                        |
| <b>8AC</b><br>7F7<br>7N7<br>14AF7<br>14F7<br>14N7                 |   | <b>8CN</b><br>1E8                          | <b>8F</b><br>25A7GT   | <b>8KQ</b><br>7591<br>7591A               |
| <b>8AD</b><br>6SA7GT<br>12SA7GT                                   |   | <b>8CP</b><br>1AC5<br>1AD5                 | <b>8FU</b><br>6BD4<br>6BD4A   | <b>8KS</b><br>5DJ4                        |
| <b>8AE</b><br>7E7<br>7R7<br>9U8A<br>14E7<br>14R7                  |   | <b>8CT</b><br>6BA7<br>12BA7                | <b>8G</b><br>6C8G<br>6F8G   | <b>8MG</b><br>50JY6                       |
| <b>8AJ</b><br>1D8GT   |   | <b>8DA</b><br>1T6                          | <b>8GB</b><br>6BL4  | <b>8MH</b><br>3CA3<br>3CA3A               |
| <b>8AL</b><br>7Q7   |   | <b>8DC</b><br>5636<br>6206                 | <b>8GC</b><br>6BK4<br>6BK4A<br>6BK4B<br>6BK4C/6EL4A<br>6EL4                       | <b>8MK</b><br>3CU3A                       |
| <b>8AN</b><br>50Y7GT<br>50Z7G                                     |   | <b>8DE</b><br>5639<br>5840<br>5899<br>5902 |   | <b>8ML</b><br>6LH6A                       |
| <b>8AO</b><br>117L7/M7GT  | <b>8BE</b><br>12AH7GT   |  | <b>8GD</b><br>6CB5<br>6CB5A   | <b>8MQ</b><br>6LJ6<br>6LJ6A/6LH6A         |
| <b>8AS</b><br>3A8GT   | <b>8BF</b><br>7K7   | <b>8DG</b><br>6021<br>6111<br>6112         | <b>8GH</b><br>3B2   | <b>8MT</b><br>3CX3<br>3DF3                |
| <b>8AV</b><br>117N7GT<br>117P7GT                                  | <b>8BK</b><br>6SG7<br>6SH7<br>12SG7<br>12SH7  | <b>8DJ</b><br>5896                         | <b>8GT</b><br>25E5/PL36<br>N308<br>PL36   | <b>8MU</b><br>2CN3A<br>3CN3A<br>3CN3B     |
| <b>8AY</b><br>6AD7G   | <b>8BL</b><br>7S7<br>14J7   | <b>8DK</b><br>5718<br>5719<br>6814         | <b>8H</b><br>6J8G   | <b>8MX</b><br>3DB3<br>3DB3/3CY3<br>3DJ3   |
|   | <b>8BU</b><br>26A7GT  | <b>8E</b><br>6B8<br>6B8G<br>12C8           | <b>8HY</b><br>70Z7<br>70Z7A   | <b>8MZ</b><br>3DC3                        |
|   | <b>8BW</b><br>7F8<br>14F8   |  | <b>8JB</b><br>6CK4  | <b>8N</b><br>6AB7<br>6AC7<br>6AC7W        |
|   | <b>8BZ</b><br>7X7   | <b>8EL</b><br>6AH4GT                       | <b>8JC</b><br>6DQ5  |   |

|            |              |             |                |               |
|------------|--------------|-------------|----------------|---------------|
| <b>8N</b>  | <b>8V</b>    | <b>9A</b>   | <b>9AJ</b>     | <b>9AQ</b>    |
| 6SJ7       | 7AH7         | B152        | 4BC8           | LF183         |
| 6SJ7GT     | 7B7          | B309        | 4BQ7A          | LF184         |
| 6SJ7Y      | 7C7          | B329        | 4BQ7A/4BZ7     | XF183         |
| 6SK7       | 7G7          | B339        | 4BS8           | XF184         |
| 6SK7GT     | 7L7          | B739        | 4BZ7           | YF183         |
| 6SS7       | 7V7          | B749        | 4ES8/XCC189    | YF184         |
| 12SJ7      | 14A7         | B759        | 4KN8/4RHH8     |               |
| 12SJ7GT    | 14C7         | E81CC       | 4RHH2          | <b>9AX</b>    |
| 12SK7      | 14H7         | E82CC       | 5BK7A          | 6BC7          |
| 12SK7GT    | EF22         | E83CC       | 5BQ7A          | 6BJ7          |
| 5693       | W81          | ECC81       | 5ES8/YCC189    | <b>9BD</b>    |
| KT77       | W143         | ECC82       | 6AQ8           | 6V3A          |
| OSW3111    | W148         | ECC83       | 6AQ8/ECC85     | EY81F         |
|            |              | ECC186      | 6BC8/6BZ8      |               |
| <b>8NB</b> | <b>8W</b>    | ECC801      | 6BK7A          | <b>9BF</b>    |
| 26HU5      | 7B6          | ECC802      | 6BK7B          | 11HM7         |
|            | 7C6          | ECC803      | 6BQ7           | 12BV7         |
| <b>8NC</b> | 7E6          | M8136       | 6BQ7/6BZ7/6BS8 | 12BY7         |
| 26LW6      | 14B6         | M8137       | 6BS8           | 12BY7A/12BV7/ |
|            | 14E6         | M8162       | 6BZ7           | 12DQ7         |
| <b>8ND</b> |              | PCC18       | 6BZ8           | 12DQ7         |
| 1DG3       | <b>8X</b>    | QA2406      | 6DJ8/ECC88     | 12GN7         |
| 1DG3A      | 14B8         | QB309       | 6DT8           | 12GN7A        |
|            |              | XCC82       | 6ES8/ECC189    | 12HG7         |
| <b>8NJ</b> | <b>8Y</b>    |             | 6JK8           | 12HG7/12GN7A  |
| 6EN4       | 6AG4Y        | <b>9AC</b>  | 6KN8/6RHH8     | 12HL7         |
|            | 6AG7         | 6S4         | 9AQ8/PCC85     | EL180         |
| <b>8Q</b>  |              | 6S4A        | 12DT8          | <b>9BL</b>    |
| 6AE5GT     | <b>8Z</b>    |             | 17EW8          | 7189          |
| 6SQ7       | 32L7GT       | <b>9AD</b>  | 17EW8/HCC85    | <b>9BQ</b>    |
| 6SQ7GT     |              | 5879        | 6922/E88CC     | 6BK5          |
| 6SR7       | <b>9A</b>    |             | 7057           | 12BK5         |
| 6ST7       | 6AU7         | <b>9AE</b>  | 7308           | 25BK5         |
| 6SZ7       | 7AU7         | 5EA8        | B719           | <b>9BV</b>    |
| 12SQ7      | 9AU7         | 5GH8A       | ECC85          | 6CL6          |
| 12SQ7GT    | 12AE7        | 5KD8        | ECC88          | 6197          |
| 12SR7      | 12AT7/ECC81  | 5U8         | ECC180         | 6677/6CL6     |
| 12SR7GT    | 12AT7WA      | 6AX8        | ECC189         | <b>9BX</b>    |
| 12SW7      | 12AT7WB      | 6EA8        | HCC85          | 6AM4          |
| OBC3       | 12AU7        | 6GH8        | PCC85          | <b>9CB</b>    |
| OSW3105    | 12AU7A/ECC82 | 6GH8A       | XCC189         | 6AF3          |
|            | 12AV7        | 6GJ8        | YCC189         | 6AL3          |
| <b>8R</b>  | 12AX7        | 6HL8        | YCL180         | 6AL3/EY88     |
| 6SA7       | 12AX7A/ECC83 | 6KD8        |                | 6BR3/6RK19    |
| 6SB7Y      | 12AY7        | 6LM8        | <b>9AK</b>     | 6RK19         |
| 12SA7      | 12AZ7        | 6MQ8        | 5X8            | 12AF3/12BR3/  |
| 12SY7      | 12AZ7A       | 6MU8        | 6X8A           | 12RK19        |
| OSW3104    | 12BH7        | 6U8         | 19X8           | 16AQ3         |
|            | 12BH7A       | 6U8A/6KD8   | <b>9AQ</b>     | 16AQ3/XY88    |
| <b>8S</b>  | 12BZ7        | 9GH8A       | 3EH7           | 17BR3         |
| 6SC7       | 12DW7        | 9JW8/PCF802 | 3EH7/XF183     | 17BR3/17K19   |
| 12SC7      | 12FV7        | 19EA8       | 3EJ7           | 17RK19        |
|            | 5751         | 6678/6U8A   | 3EJ7/XF184     | 17R3          |
| <b>8T</b>  | 5814A        | 7059        | 4EH7/LF183     | 17BR3/17K19   |
| 12B8GT     | 5963         | CXF80       | 4EJ7/LF184     | 17RK19        |
| 25B8GT     | 5965         | ECF82       | 6EH7/EF183     | 17Z3/PY81     |
|            | 6072         | ECF802      | 6EJ7           | 20AQ3/LY88    |
| <b>8U</b>  | 6189         | LCF802      | 6EJ7/EF184     | 30AE3/PY88    |
| 7A8        | 6211         | PCF802      | EF183          | 34R3          |
|            | 6679/12AT7   |             | EF184          | EY88          |
| <b>8V</b>  | 6680/12AU7A  | <b>9AG</b>  | EF811          |               |
| 7A7        | 6681/12AX7A  | 12B4A       | EF814          |               |
| 7AD7       | 7025         |             |                |               |
| 7AG7       | 7247         |             |                |               |

|             |            |             |              |            |
|-------------|------------|-------------|--------------|------------|
| <b>9CB</b>  | <b>9DC</b> | <b>9DX</b>  | <b>9EU</b>   | <b>9FT</b> |
| LY88        | 9A8/PCF80  | 8BA8A       | 6GC5         | 6CH8       |
| XY88        | ECF80      | 8BH8        | 12AB5        |            |
|             | LCF80      | 8CX8        | 6973         | <b>9FX</b> |
| <b>9CF</b>  | LZ319      | 8EB8        | 7061         | 5CL8       |
| 9BR7        | LZ329      | 8GN8        |              | 5CL8A      |
| 12BR7       | PCF80      | 8JV8        |              | 6CL8       |
|             | XCF80      | 10GN8       | <b>9EX</b>   | 6CL8A      |
| <b>9CK</b>  |            | 10HF8       | 6BM8/ECL82   | 9CL8       |
| 6CM6        | <b>9DE</b> | 10JA8/10LZ8 | 8B8          |            |
| 6DW5        | 4RHH8      | 10JT8       | 11BM8        | <b>9FZ</b> |
|             | 6RHH8      | 10JY8       | 16A8/PCL82   | 5KZ8       |
|             | ECC89      | 10KR8       | 50BM8/UCL82  | 6CM8       |
| <b>9CV</b>  |            | 10LB8       | ECL82        | 6KZ8       |
| 6BQ5/EL84   | <b>9DJ</b> | 10LW8       | LCL82        | 9KZ8       |
| 6CW5        | 6BW4       | 10LZ8       | LN119        |            |
| 6CW5/EL86   | 12BW4      | 11J8        | N369         | <b>9G</b>  |
| 8BQ5        |            | 11KV8       | PCL82        | 5686       |
| 8CW5/XL86   | <b>9DP</b> | 11LQ8       | UCL82        |            |
| 10BQ5       | 6AR8       | PCF82       | UCL83        |            |
| 10CW5       | 6JH8       |             |              | <b>9GA</b> |
| 10CW5/LL86  |            | <b>9DZ</b>  | <b>9FA</b>   | 6FG6/EM84  |
| 15CW5       | <b>9DR</b> | 5AV8        | 5BR8         | 6HU6/EM87  |
| 15CW5/PL84  | 6BC4       |             | 5BR8/5FV8    | EM84       |
| EL84        |            | <b>9E</b>   | 5FV8         | EM87       |
| EL86        | <b>9DS</b> | 5T8         | 5MB8         | <b>9GC</b> |
| LL86        | 5AS8       | 6AK8/EABC80 | 6BR8         | 12J8       |
| M709        | 6AS8       | 6T8         | 6BR8A        |            |
| PL84        |            | 6T8A        | 6FV8         | <b>9GE</b> |
| XL84        | <b>9DT</b> | 19T8        | 6FV8A        | 5CQ8       |
| XL86        | 1RK23      | DLO12       | 6JN8         | 6CQ8       |
|             | 1S2A/DY87  | EABC80      | 6MB8         |            |
| <b>9CY</b>  |            |             | 12EC8        | <b>9GF</b> |
| 5AM8        |            | <b>9EC</b>  | 12JN8        | 4LJ8       |
| 6AM8        |            | 5B8         | 19CL8A       | 5CG8       |
| 6AM8A       |            |             | 19HV8        | 5FG7       |
| 6HJ8        |            | <b>9ED</b>  | 19JN8/19CL8A | 5GS7       |
|             |            | 6A28        |              | 5LJ8       |
| <b>9CZ</b>  | <b>9DW</b> |             | <b>9FE</b>   | 6CG8       |
| 6350        | 5AT8       |             | 5BT8         | 6CG8A      |
|             | 6AT8       | <b>9EF</b>  |              | 6FG7       |
|             | 6AT8A      | 6CS7        | <b>9FG</b>   | 6GS7       |
| <b>9DA</b>  |            | 8CS7        | 3BU8/3GS8    | 6LJ8       |
| 5AN8        | <b>9DX</b> |             | 3HS8         | 7GS7       |
| 6AN8        | 6AU8       | <b>9EG</b>  | 4BU8         | <b>9GK</b> |
| 6AN8A       | 6AU8A      | 5BE8        | 4BU8/4GS8    | 6GK6       |
| 10C8        | 6AW8       | 5DH8        | 4HS8         | 7KY6       |
| 12CT8       | 6AW8A      |             | 6BU8         | 9KX6       |
| 7060        | 6BA8A      | <b>9EN</b>  | 6HS8         | 9LA6       |
| 7258        | 6BH8       | 6CN7        | 6MK8         | 10GK6      |
|             | 6CX8       | 8CN7        | 6MK8A        | 16GK6      |
| <b>9DC</b>  | 6EB8       |             |              | 7054       |
| 4BL8        | 6GN8       | <b>9EP</b>  |              | 8077/7054  |
| 4BL8/XCF80  | 6HF8       | 7058        | <b>9FH</b>   | PCL800     |
| 4KE8        | 6HZ8       | 7898        | 12F8         |            |
| 5JW8        | 6JE8       |             | <b>9FJ</b>   | <b>9GM</b> |
| 5KE8        | 6JT8       | <b>9EQ</b>  | 6BV8         | 6CU8       |
| 6BL8        | 6JV8       | 6688A       |              |            |
| 6BL8/ECF80  | 6KR8       |             | <b>9FK</b>   | <b>9GR</b> |
| 6JW8/ECF802 | 6KV8       | <b>9ER</b>  | 17H3         | 6DB5       |
| 6KE8        | 6LB8       | 6BJ8        |              | 12DB5      |
| 6LN8        | 6LF8       | 6BN8        | <b>9FN</b>   | <b>9GS</b> |
| 6LN8/LCF80  | 6LQ8       | 8BN8        | 6BY8         | 12AL8      |
| 6LX8/LCF802 | 6LY8       |             | EF80         |            |
| 6MG8        | 6MV8       | <b>9ES</b>  |              |            |
| 8A8         | 8AU8       | 6CM7        |              |            |
| 9A8         | 8AW8A      | 8CM7        |              |            |

|  |   |   |  |  |
|--|---|---|--|--|
| <b>9H</b><br>5687<br>7044  | <b>9HP</b><br>17AY3<br>17AY3A<br>17BH3<br>17BS3<br>17BS3A/17DW4A<br>17CK3<br>17DW4A<br>22BH3<br>22BH3A<br>25CK3 | <b>9KR</b><br>14JG8<br>7724/14GT8   | <b>9LY</b><br>10GV8/LCL85<br>11MS8<br>18GV8/PCL85<br>19KG8<br>ECL85<br>LCL85<br>PCL85<br>XCL85                                       | <b>9NZ</b><br>6GT5<br>6GT5A<br>12GT5<br>12GT5A<br>17GT5<br>17GT5A<br>7868  |
| <b>9HE</b><br>6DC8<br>6DC8/EBF89<br>EBF85<br>EBF89   | <b>9HR</b><br>12DL8<br>12DV8  | <b>9KS</b><br>7360  | <b>9LZ</b><br>6GW8/ECL86<br>ECL86  | <b>9PA</b><br>6JC8   |
| <b>9HF</b><br>6DE7<br>6DR7<br>6EW7<br>6FD7<br>9RAL1<br>10DE7<br>10DR7<br>10EW7<br>13DE7<br>13DR7<br>13FD7  | <b>9HV</b><br>12EM6   | <b>9KT</b><br>12FQ8   | <b>9M</b><br>6CA4<br>E24<br>U709<br>UU12   | <b>9PB</b><br>7905   |
| <b>9HG</b><br>12DE8  | <b>9HX</b><br>6DX8<br>6DX8/ECL84<br>10DX8<br>10DX8/LCL84<br>15DQ8/PCL84<br>ECL84<br>LCL84                       | <b>9KU</b><br>12FR8   | <b>9MB</b><br>6GY8   | <b>9PG</b><br>20EZ7  |
| <b>9HK</b><br>5BW8<br>6BW8   | <b>9HZ</b><br>12DK7   | <b>9KV</b><br>12FX8<br>12FX8A   | <b>9MP</b><br>5HG8<br>5HG8/LCF86<br>6HG8<br>6HG8/ECF86<br>7HG8<br>7HG8/PCF86<br>ECF86<br>LCF86<br>PCF86                              | <b>9PL</b><br>8106   |
| <b>9HL</b><br>6939   | <b>9JD</b><br>12DY8   | <b>9LG</b><br>6CY7<br>11CY7   | <b>9MQ</b><br>6GM5   | <b>9PM</b><br>3JC6<br>3JC6A<br>3KT6<br>4HM6<br>4JC6A<br>4JD6<br>4KT6<br>6HM6<br>6JC6A<br>6JD6<br>6KT6  |
| <b>9HN</b><br>5CZ5<br>6CZ5<br>6DT5<br>6EM5<br>8EM5<br>12DT5  | <b>9JE</b><br>35DZ8   | <b>9LK</b><br>7551<br>7558  | <b>9MR</b><br>6FA7   | <b>9PQ</b><br>6JU8<br>6JU8A<br>8JU8A   |
| <b>9HP</b><br>6AY3<br>6AY3B<br>6BA3<br>6BH3<br>6BH3A<br>6BS3<br>6BS3A<br>6CH3<br>6CJ3/6CH3<br>6CK3<br>6CL3<br>6CL3/6CK3<br>6CM3<br>6DN3<br>6DW4<br>6DW4B<br>12AY3<br>12AY3A<br>12BS3<br>12BS3A/12DW4A<br>12CL3<br>12DW4A | <b>9JF</b><br>5EU8<br>6EU8  | <b>9LP</b><br>6CG7<br>6EV7<br>6FQ7<br>6FQ7/6CG7<br>6GU7<br>8CG7<br>8FQ7<br>8FQ7/8CG7<br>8GU7<br>12FQ7 | <b>9NH</b><br>6GB5<br>6GB5/EL500<br>13GB5<br>13GB5/XL500<br>17BB14<br>18GB5/LL500<br>27GB5/PL500<br>EL500<br>LL500<br>PL500<br>XL500 | <b>9PV</b><br>6KA8<br>8KA8   |
|  | <b>9JG</b><br>6EH8  | <b>9LQ</b><br>6EQ7<br>6KL8<br>12EQ7<br>12KL8<br>20EQ7   | <b>9NJ</b><br>6HU8/ELL80   | <b>9PX</b><br>7695   |
|  | <b>9JT</b><br>7199  | <b>9LS</b><br>6EU7  | <b>9NW</b><br>6HA6<br>6HB6/6HA6  | <b>9QA</b><br>4GJ7/XCF801<br>4GX7<br>5GJ7/LCF801<br>5GX7<br>5HB7<br>6GJ7<br>6GJ7/ECF801<br>6GX7<br>6HB7<br>8GJ7<br>8GJ7/PCF801<br>ECF801<br>LCF801<br>PCF801<br>XCF801 |
|  | <b>9JU</b><br>12DS7<br>12DS7A   | <b>9LT</b><br>6ET7<br>6KU8<br>8ET7<br>10KU8   |  |  |
|  | <b>9K</b><br>5763<br>6417   | <b>9LW</b><br>3GS8/3BU8<br>3GS8<br>4GS8<br>4GS8/4BU8  |  |  |
|  | <b>9KA</b><br>6EZ8<br>19EZ8   | <b>9LY</b><br>6GV8<br>6GV8/ECL85<br>9GV8<br>9GV8/XCL85  |  |  |
|  | <b>9KP</b><br>6FH8  |   |  |  |
|  | <b>9KR</b><br>6FM8<br>14GT8   |   |  |  |

|  |   |   |   |  |
|--|---|---|---|--|
| <b>9QD</b><br>6GF7<br>6GF7A<br>10GF7<br>10GF7A<br>13GF7<br>13GF7A  | <b>9QT</b><br>21LR8<br>31LR8  | <b>9RT</b><br>2BJ2<br>2BJ2A   | <b>12AQ</b><br>6DS4<br>13CW4<br>7586<br>7895<br>8056<br>8203<br>8393<br>8628                        | <b>12CA</b><br>6M11<br>16BX11  |
| <b>9QG</b><br>6KM8   | <b>9QU</b><br>6JG6<br>6JG6A<br>6JR6<br>6JT6<br>6JT6A<br>6KV6<br>6KV6A<br>12JT6<br>12JT6A<br>17JG6<br>17JG6A<br>17JT6<br>17JT6A<br>17KV6A<br>22JG6<br>22JG6A<br>22JR6<br>22KV6A<br>33JR6 | <b>9RU</b><br>6ME8  | <b>9RX</b><br>12CT3<br>17CT3<br>25CT3   | <b>12CT</b><br>8058<br>8627  |
| <b>9QJ</b><br>5BC3<br>5BC3A  | <b>9QK</b><br>6GJ5<br>6GJ5A<br>12GJ5<br>12GJ5A<br>17GJ5<br>17GJ5A   | <b>9SB</b><br>25HX5   | <b>12AS</b><br>7587   | <b>12DA</b><br>6AG11<br>6AY11  |
| <b>9QL</b><br>6JB6<br>6JB6A<br>6JEG<br>6JEG6<br>6JF6<br>6JU6<br>6KM6<br>6LQ6/6JE6B<br>6LQ6/6JE6C<br>6LZ6<br>6ME6<br>12JB6<br>12JB6A<br>17JB6<br>17JB6A<br>17JF6<br>22JF6<br>22JU6<br>22KM6<br>24JE6A<br>24LQ6/24JE6C<br>24LZ6<br>31LQ6<br>31LZ6<br>36MC6 | <b>9QY</b><br>6LC8<br>8LC8  | <b>9SG</b><br>6DK3  | <b>12BF</b><br>6B10<br>8B10   | <b>12DG</b><br>2AH2  |
| <b>9QM</b><br>6GQ7<br>19GQ7  | <b>9QZ</b><br>6LE8<br>10LE8<br>15LE8  | <b>9SU</b><br>1V2<br>2AV2   | <b>12BJ</b><br>6GE5<br>6GF5<br>6HB5<br>12GE5<br>17GE5<br>21HB5<br>21HB5A                            | <b>12DM</b><br>6AR11<br>8AR11<br>8BQ11<br>8CB11<br>11AR11<br>11BQ11<br>16BQ11                                |
| <b>9QP</b><br>6KT8   | <b>9RA</b><br>6JQ6<br>12JQ6<br>17JQ6  | <b>9SV</b><br>5842/417A   | <b>12BL</b><br>6AX3<br>6BJ3<br>12AX3<br>12BT3<br>17AX3  | <b>12DP</b><br>6AF11<br>6AS11<br>6BD11<br>15AF11<br>15BD11<br>15BD11A  |
| <b>9QT</b><br>6KY8<br>6KY8A<br>6LR8<br>15KY8<br>15KY8A<br>17LD8  | <b>9RB</b><br>1BC2<br>1BC2A<br>1BH2<br>1BH2A  | <b>9SX</b><br>5847/404A   | <b>12BM</b><br>6FJ7   | <b>12DR</b><br>6GV5<br>6GY5<br>16GY5<br>17GV5<br>21GV5   |
|  | <b>9RJ</b><br>6KGG6A/EL509<br>21KQ6<br>29KQ6/PL521<br>29LE6<br>40KGG6A/PL509<br>EL509<br>PL509<br>PL521   | <b>9SY</b><br>1AX2<br>1X2A<br>1X2B/1X2A<br>1X2C<br>DY80<br>R-19   | <b>12BQ</b><br>6C10<br>6D10<br>ECH42<br>X150  | <b>12DZ</b><br>6JZ8<br>6LU8<br>6MF8<br>13JZ8<br>15MF8<br>16LU8A<br>17JZ8<br>21LU8<br>23JZ8<br>24JZ8<br>25JZ8 |
|  | <b>9RL</b><br>6LT8<br>8LT8<br>11LT8   | <b>10F</b><br>6C9<br>17C9   | <b>12BT</b><br>6J10<br>6Z10/6J10<br>10Z10<br>13J10<br>13Z10<br>13Z10/13J10<br>17AB10/17X10<br>17X10 | <b>12EA</b><br>2DV4<br>6DV4  |
|  | <b>9RM</b><br>6MD8<br>12MD8   | <b>10G</b><br>5U9/LCF201<br>6U9/ECF201<br>6X9/ECF200<br>ECF200<br>ECF201<br>LCF201                      | <b>12BU</b><br>6AL11<br>6G11<br>10AL11<br>12AL11  | <b>12EJ</b><br>6FM7<br>13FM7<br>13FM7/15FM7<br>15FM7   |
|  |   | <b>10H</b><br>6AF9<br>6Y9/EFL201<br>11AF9<br>11Y9<br>11Y9/LFL200<br>EFL200<br>EFL201<br>LF200<br>LFL200 | <b>12BW</b><br>6J11   | <b>12EO</b><br>6FY7  |
|  |   | <b>12AQ</b><br>2CW4<br>2DS4<br>2EG4<br>6CW4   | <b>12BY</b><br>6AV11<br>6K11<br>6K11/6Q11<br>6Q11   |  |



|   |   |  |  |   |
|---|---|--|--|---|
| <b>12EO</b><br>11FY7<br>15FY7   | <b>12FK</b><br>6JN6<br>12JN6<br>17JN6<br>21JV6<br>33JV6           | <b>12FY</b><br>30MB6<br>31JS6A<br>31JS6C<br>35LR6                              | <b>12GY</b><br>6HV5A<br>6HZ5<br>6HZ5/6JD5  | <b>12HU</b><br>6MN8   |
| <b>12ER</b><br>6BA11<br>8BA11   |   | <b>12GA</b><br>6BE3/6BZ3<br>12BE3<br>17BE3/17BZ3                               | <b>12GZ</b><br>16AK9<br>23Z9   | <b>12HW</b><br>11CF11                                       |
| <b>12ES</b><br>12HE7  | <b>12FL</b><br>6HJ5<br>21HJ5                                      |  | <b>12HA</b><br>3AW2<br>3AW2A   | <b>12HX</b><br>19DE3  |
| <b>12EV</b><br>6JB5/6HE5  | <b>12FM</b><br>6T9  | <b>12GC</b><br>14BL11  |  | <b>12HY</b><br>3BS2A<br>3BT2<br>3BW2<br>3BW2/3BS2A/<br>3BT2 |
| <b>12EW</b><br>2AS2<br>2AS2A  | <b>12FN</b><br>33GY7<br>33GY7A<br>50GY7A                          | <b>12GD</b><br>6JZ6<br>21JZ6<br>30JZ6  | <b>12HB</b><br>6BV11<br>12BV11   | <b>12JA</b><br>26LX6  |
| <b>12EY</b><br>6HE5   | <b>12FP</b><br>6BH11<br>8BU11                                     | <b>12GF</b><br>6BN11<br>8BN11  | <b>12HC</b><br>6EJ4A   | <b>12JB</b><br>2BU2<br>2BU2/2AH2                            |
| <b>12EZ</b><br>6AD10<br>6BF11<br>6BY11<br>6T10<br>10T10<br>12AE10<br>12BF11<br>12T10<br>13V10<br>17BF11<br>18AJ10<br>24BF11 | <b>12FQ</b><br>4HA7<br>4HA7/4HC7<br>5HA7                          | <b>12GH</b><br>21KA6   | <b>12HE</b><br>6AG9<br>8AL9  | <b>12JE</b><br>6JH5   |
|   | <b>12FR</b><br>4HC7   | <b>12GJ</b><br>6LB6  | <b>12HF</b><br>6BW3<br>6CD3<br>6CE3<br>6CG3/6CE3/<br>6CD3/6BW3<br>19CG3<br>25CG3 | <b>17HB25</b><br>17HB25                                     |
|   | <b>12FS</b><br>38HE7<br>38HK7<br>53HK7                            | <b>12GK</b><br>34CE3   |  | <b>407A</b><br>407A   |
| <b>12FA</b><br>6EA4<br>6EH4A<br>6EH7  | <b>12FU</b><br>8BM11<br>9BJ11                                     | <b>12GL</b><br>14BR11  | <b>12HG</b><br>6MJ8  | <b>991</b><br>991   |
| <b>12FB</b><br>6HF5   | <b>12FV</b><br>3AT2<br>3AT2B<br>3BN2<br>3BN2A                     | <b>12GS</b><br>11BT11<br>11CH11  | <b>12HJ</b><br>6AH9<br>9AH9  | <b>5642</b><br>5642   |
| <b>12FC</b><br>33GT7  |   | <b>12GU</b><br>6KN6<br>42KN6   | <b>12HK</b><br>3BL2<br>3BL2A<br>3BM2   | <b>5672</b><br>5672   |
| <b>12FE</b><br>6AC10<br>6AK10<br>6U10<br>8AC10<br>9AK10<br>9AM10<br>12AC10A   | <b>12FX</b><br>17BW3<br>17BZ3<br>22BW3                            | <b>12GV</b><br>1AD2<br>1AD2A   |  | <b>5678</b><br>5678   |
|   | <b>12FY</b><br>6JS6<br>6JS6A<br>6JS6C<br>6LR6<br>21JS6A<br>23JS6A | <b>12GW</b><br>6KD6<br>6LF6<br>20LF6<br>30KD6<br>36KD6<br>36KD6/40KD6<br>40KD6 | <b>12HL</b><br>21LG6<br>21LG6A   | <b>5734</b><br>5734   |
| <b>12FJ</b><br>6JM6<br>6JM6A<br>17JM6A  |   | <b>12GY</b><br>6HS5<br>6HV5  | <b>12HN</b><br>11CA11  | <b>5783</b><br>5783   |
|   |   |  | <b>12HR</b><br>31AL10  | <b>6360A</b><br>6360A                                       |
|   |   |  | <b>12HT</b><br>32HQ7   | <b>6977</b><br>6977   |
|   |   |  |  | <b>8808</b><br>8808   |

## TYPE NUMBER vs. TERMINAL DIAGRAM

| Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram |
|----------|------------------|----------|------------------|----------|------------------|----------|------------------|----------|------------------|
| 1A3      | 5AP              | 11A4     | 5AD              | 2CY5     | 7EW              | 3BT2     | 12HY             | 3KT6     | 9PM              |
| 1A4P     | 4M               | 11A6     | 7AK              | 2D21     | 7BN              | 3BU8/    |                  | 3LF4     | 6BA              |
| 1A5GT    | 6X               | 11B4     | 5AD              | 2DS4     | 12AQ             | 3GS8     | 9FG              | 3Q4      | 7BA              |
| 1A6      | 6L               | 11C5     | 7AQ              | 2DV4     | 12EA             | 3BW2     | 12HY             | 3Q5GT    | 7AP              |
| 1A7GT    | 7Z               | 11C6     | 7AK              | 2DZ4     | 7DK              | 3BW2/    |                  | 3S4      | 7BA              |
| 1AC5     | 8CP              | 11D5     | 6AX              | 2E5      | 6R               | 3BS2A/   |                  | 3V4      | 6BX              |
| 1AD2     | 12GV             | 11E3     | 4AA              | 2EG4     | 12AQ             | 3BT2     | 12HY             | 4AU6     | 7BK              |
| 1AD2A    | 12GV             | 11G5     | 7AO              | 2EN5     | 7FL              | 3BY6     | 7CH              | 4AV6     | 7BT              |
| 1AD5     | 8CP              | 11H4     | 5AG              | 2ER5     | 7FP              | 3BZ6     | 7CM              | 4BC5     | 7BD              |
| 1AX2     | 9Y               | 11N5     | 7AO              | 2FH5     | 7FP              | 3CA3     | 8MH              | 4BC8     | 9AJ              |
| 1AY2     | 1AY2             | 1N2A     | 3C               | 2FQ5A    | 7FP              | 3CA3A    | 8MH              | 4BL8     | 9DC              |
| 1AY2A    | 1AY2             | 1N5GT    | 5Y               | 2FS5     | 7GA              | 3CB6/    |                  | 4BL8/    |                  |
| 1B3GT    | 3C               | 1N6G     | 7AM              | 2GK5/    |                  | 3CF6     | 7CM              | XCE80    | 9DC              |
| 1B4P     | 4M               | 1P5GT    | 5Y               | 2FQ5A    | 7FP              | 3CE5     | 7BD              | 4BN6     | 7DF              |
| 1B5/2S5  | 6M               | 1Q5GT    | 6AF              | 2GU5     | 7GA              | 3CF6     | 7CM              | 4BQ7A    | 9AJ              |
| 1B7GT    | 7Z               | 1R5      | 7AT              | 2HA5     | 7GM              | 3CN3A    | 8MU              | 4BQ7A/   |                  |
| 1BC2     | 9RG              | 1RK23    | 9DT              | 2HQ5     | 7GM              | 3CN3B    | 8MU              | 4BZ7     | 9AJ              |
| 1BC2A    | 9RG              | 1S2A/    |                  | 2T4      | 5T               | 3CS6     | 7CH              | 4BS8     | 9AJ              |
| 1BH2     | 9RG              | DY87     | 9DT              | 3A2      | 9DT              | 3CU3A    | 8MK              | 4BU8     | 9FG              |
| 1BH2A    | 9RG              | 1S4      | 7AV              | 3A2A     | 9DT              | 3CX3     | 8MT              |          |                  |
| 1C5GT    | 6X               | 1S5      | 6AU              | 3A3      | 8EZ              | 3CY5     | 7EW              | 4BU8/    |                  |
| 1C6      | 6L               | 1T4      | 6AR              | 3A3/3B2  | 8EZ              | 3CZ3     | 8EZ              | 4GS8     | 9FG              |
| 1C7G     | 7Z               | 1T5GT    | 6X               | 3A3A/    |                  | 3CZ3A    | 8EZ              | 4BZ6     | 7CM              |
| 1C21     | 4V               | 1T6      | 8DA              | 3B2      | 8EZ              | 3DB3     | 8MX              | 4BZ7     | 9AJ              |
| 1D5GP    | 5Y               | 1U4      | 6AR              | 3A3B     | 8EZ              | 3DB3/    |                  | 4CB6     | 7CM              |
| 1D5GT    | 5R               | 1U5      | 6BW              | 3A3C     | 8EZ              | 3CY3     | 8MX              | 4CS6     | 7CH              |
| 1D7G     | 7Z               | 1V       | 4G               | 3A4      | 7BB              | 3DC3     | 8MZ              | 4CY5     | 7EW              |
| 1D8GT    | 8AJ              | 1V2      | 9U               | 3A5      | 7BC              | 3DF3     | 8MT              | 4DF6     | 7CM              |
| 1DG3     | 8ND              | 1X2A     | 9Y               | 3ABGT    | 8AS              | 3DG4     | 5DE              | 4DK6     | 7CM              |
| 1DG3A    | 8ND              |          |                  | 3AF4A    | 7DK              | 3DJ3     | 8MX              | 4DT6     | 7EN              |
| 1DN5     | 6BW              | 1X2B/    |                  | 3AF4A/   |                  | 3DK6     | 7CM              | 4DT6A    | 7EN              |
| 1E5GP    | 5Y               | 1X2A     | 9Y               | 3DZ4     | 7DK              | 3DT6     | 7EN              | 4EH7/    |                  |
| 1E7GT    | 8C               | 1X2C     | 9Y               | 3AL5     | 6BT              | 3DT6A    | 7EN              | LF183    | 9AQ              |
| 1E8      | 8CN              | 2A3      | 4D               | 3AT2     | 12FV             | 3DZ4     | 7DK              | 4EJ7/    |                  |
| 1F4      | 5K               | 2A5      | 6B               | 3AT2B    | 12FV             | 3EA5     | 7EW              | LF184    | 9AQ              |
| 1F5G     | 6X               | 2A6      | 6G               | 3AU6     | 7BK              | 3EH7     | 9AQ              | 4ES8/    |                  |
| 1F6      | 6W               | 2A7      | 7C               | 3AV6     | 7BT              | 3EH7/    |                  | XCC189   | 9AJ              |
| 1F7G     | 7AF              | 2AF4A/   |                  | 3AW2     | 12HA             | XF183    | 9AQ              | 4EW6     | 7CM              |
| 1G3GT/   |                  | 2AF4B    | 7DK              | 3AW2A    | 12HA             | 3EJ7     | 9AQ              | 4GJ7/    |                  |
| 1B3GT    | 3C               |          |                  | 3AW3     | 8EZ              |          |                  | XCE801   | 9QA              |
| 1G3GT/   |                  | 2AF4B/   |                  | 3B2      | 8GH              | 3EJ7/    |                  | 4GK5     | 7FP              |
| 1B3GT    | 3C               | 2DZ4     | 7DK              | 3B4WA    | 7CY              | XF184    | 9AQ              | 4GM6     | 7CM              |
| 1G4GT    | 5S               | 2AH2     | 12DG             | 3BA6     | 7BK              | 3ER5     | 7FP              | 4GS8     | 9LW              |
| 1G5G     | 6X               | 2AS2     | 12EW             | 3BC5     | 7BD              | 3FH5     | 7FP              | 4GS8/    |                  |
| 1G6GT    | 7AB              | 2AS2A    | 12EW             | 3BC5/    |                  | 3F55     | 7GA              | 4BU8     | 9LW              |
| 1H4G     | 5S               | 2AV2     | 9U               | 3CE5     | 7BD              | 3GK5     | 7FP              | 4GX7     | 9QA              |
| 1H5GT    | 5Z               | 2B7      | 7D               | 3BE6     | 7CH              | 3GS8/    |                  | 4GZ5     | 7CV              |
| 1H6G     | 7AA              | 2BJ2     | 9RT              | 3BL2     | 12HK             | 3BU8     | 9LW              | 4HA5     | 7GM              |
| 1J3      | 3C               | 2BJ2A    | 9RT              | 3BL2A    | 12HK             | 3GS8     | 9LW              | 4HA5/    |                  |
| 1J5G     | 6X               | 2BN4     | 7EG              | 3BM2     | 12HK             |          |                  | PC900    | 7GM              |
| 1J6G     | 7AB              | 2BN4A    | 7EG              | 3BN2     | 12FV             | 3HM5/    |                  | 4HA7     | 12FQ             |
| 1J6GT    | 7AB              | 2BU2     | 12JB             | 3BN2A    | 12FV             | 3HA5     | 7GM              | 4HA7/    |                  |
| 1K3/1J3  | 3C               | 2BU2/    |                  | 3BN4     | 7EG              | 3HQ5     | 7GM              | 4HC7     | 12FQ             |
| 1K3A/1J3 | 3C               | 2AH2     | 12JB             | 3BN4A    | 7EG              | 3HS8     | 9EG              | 4HC7     | 12FR             |
| 1L4      | 6AR              | 2CN3A    | 8MU              | 3BN6     | 7DF              | 3JC6     | 9PM              | 4HM6     | 9PM              |
| 1L6      | 7DC              | 2CW4     | 12AQ             | 3BS2A    | 12HY             | 3JC6A    | 9PM              | 4HQ5     | 7GM              |

| Type No.        | Terminal Diagram | Type No.       | Terminal Diagram | Type No.        | Terminal Diagram | Type No.      | Terminal Diagram | Type No.                | Terminal Diagram |
|-----------------|------------------|----------------|------------------|-----------------|------------------|---------------|------------------|-------------------------|------------------|
| 4HS8            | 9FG              | 5HG8           | 9MP              | 6AE6G           | 7AH              | 6AU6A         | 7BK              | 6BJ3                    | 12BL             |
| 4JC6A           | 9PM              | 5HG8/<br>LCF86 | 9MP              | 6AE7GT          | 7AX              | 6AU6WB        | 7BK              | 6BJ6                    | 7CM              |
| 4JD6            | 9PM              |                |                  | 6AF3            | 9CB              | 6AU7          | 9A               | 6BJ7                    | 9AX              |
| 4JH6            | 7CM              | 5HZ6           | 7EN              | 6AF4            | 7DK              | 6AU8          | 9DX              | 6BJ8                    | 9ER              |
| 4KF8            | 9DC              | 5J6            | 7BF              | 6AF4A           | 7DK              | 6AU8A         | 9DX              | 6BK4                    | 8GC              |
| 4KN8/<br>4RHH8  | 9AJ              | 5JK6           | 7CM              | 6AF6G           | 7AG              | 6AV56A        | 6CK              | 6BK4A                   | 8GC              |
| 4KT6            | 9PM              | 5JL6           | 7CM              | 6AF9            | 10L              | 6AV5GT        | 6CK              | 6BK4B                   | 8GC              |
| 4LJ8            | 9GF              | 5JW8           | 9DC              | 6AF11           | 12DP             | 6AV6          | 7BT              | 6BK4C/<br>6EL4A         | 8GC              |
| 4LU6            | 7CM              | 5KD8           | 9AE              | 6AG4Y           | 8Y               | 6AV11         | 12BY             | 6BK5                    | 9BQ              |
|                 |                  | 5KE8           | 9DC              | 6AG5            | 7BD              | 6AW8          | 9DX              |                         |                  |
| 4RHH2           | 9AJ              | 5KZ8           | 9FZ              | 6AG7            | 8Y               | 6AW8A         | 9DX              | 6BK7A                   | 9AJ              |
| 4RHH8           | 9DE              | 5LJ8           | 9GF              | 6AG9            | 12HE             | 6AX3          | 12BL             | 6BK7B                   | 9AJ              |
| 5AM8            | 9CY              | 5M88           | 9FA              | 6AG11           | 12DA             | 6AX4GT        | 4CG              | 6BL4                    | 8GB              |
| 5AN8            | 9DA              | 5MHH3          | 7BF              | 6AH4GT          | 8EL              | 6AX4GTB       | 4CG              | 6BL7GT                  | 8BD              |
| 5AQ5            | 7BZ              | 5R4GYB         | 5T               | 6AH6            | 7BK              | 6AX5GT        | 6S               | 6BL7GTA                 | 8BD              |
| 5AR4/<br>GZ34   | 5DA              | 5T8            | 9E               | 6AH6WA          | 7BK              | 6AX8          | 9AE              | 6BL8                    | 9DC              |
| 5AS4            | 5T               | 5U4G           | 5T               | 6AH9            | 12HJ             | 6AY3          | 9HP              | 6BL8/<br>ECF80          | 9DC              |
| 5AS4A           | 5T               | 5U4GB          | 5T               | 6AK5/<br>EF95   | 7BD              | 6AY3B         | 9HP              | 6BM8/<br>ECL82          | 9EX              |
| 5AS8            | 9DS              | 5HA7           | 12FQ             | 6AK6            | 7BK              | 6AY11         | 12DA             |                         |                  |
|                 |                  | 5U8            | 9AE              |                 |                  | 6AZ8          | 9ED              |                         |                  |
| 5AT8            | 9DW              | 5U9/<br>LCF201 | 10K              | 6AK8/<br>EABC80 | 9E               | 6B4G          | 5S               | 6BN4                    | 7EG              |
| 5AU4            | 5T               | 5V3            | 5T               | 6AK10           | 12FE             | 6B5           | 6AS              | 6BN4A                   | 7EG              |
| 5AV8            | 9DZ              | 5V3A/<br>5AU4  | 5T               | 6AL3            | 9CB              | 6B6G          | 7V               | 6BN6/<br>6KS6           | 7DF              |
| 5AW4            | 5T               | 5V4G           | 5L               | 6AL3/<br>EY88   | 9CB              | 6B7           | 7D               | 6BN8                    | 9ER              |
| 5AZ4            | 5T               | 5V4GA          | 5L               | 6AL5            | 6BT              | 6B7S          | 7D               | 6BN11                   | 12GF             |
| 5B8             | 9EC              | 5V6GT          | 7AC              | 6AL7GT          | 8CH              | 6B8           | 8E               | 6BQ5/<br>EL84           | 9CV              |
| 5BC3            | 9QJ              | 5W4            | 5T               | 6AL11           | 12BU             | 6B8G          | 8E               | 6BQ6GT                  | 6AM              |
| 5BC3A           | 9QJ              | 5W4GT          | 5T               | 6AM4            | 9BX              | 6B10          | 12BF             |                         |                  |
| 5BE8            | 9EG              |                |                  |                 |                  | 6BA3          | 9HP              |                         |                  |
| 5BK7A           | 9AJ              |                |                  |                 |                  |               |                  |                         |                  |
| 5BQ7A           | 9AJ              | 5X4G           | 5Q               | 6AM8            | 9CY              | 6BA6/<br>EF93 |                  | 6BQ6GTB/<br>6CU6        | 6AM              |
| 5BR8            | 9FA              | 5X8            | 9AK              | 6AM8A           | 9CY              | 6BA7          | 7BK              | 6BQ7A/<br>6BZ7/<br>6BS8 | 9AJ              |
| 5BR8/<br>5FV8   | 9FA              | 5Y3G           | 5T               | 6AN4            | 7DK              | 6BA7A         | 8CT              | 6BR3/<br>6RK19          | 9CB              |
| 5BT8            | 9FA              | 5Y3GT          | 5T               | 6AN5            | 7BD              | 6BA8A         | 9DX              | 6BR8                    | 9FA              |
| 5BT8            | 9FE              | 5Y4G           | 5Q               | 6AN8            | 9DA              | 6BA11         | 12ER             |                         |                  |
| 5BW8            | 9HK              | 5Y4GA          | 5Q               | 6AN8A           | 9DA              | 6BC4          | 9DR              |                         |                  |
| 5CG8            | 9GF              | 5Y4GT          | 5Q               | 6AQ5            | 7BZ              | 6BC5/<br>6CE5 | 7BD              |                         |                  |
| 5CL8            | 9FX              | 5Z3            | 4C               | 6AQ5A           | 7BZ              | 6BC7          | 9AX              |                         |                  |
| 5CL8A           | 9FX              | 5Z4            | 5T               | 6AQ6            | 7BT              |               |                  |                         |                  |
| 5CQ8            | 9GE              | 6A3            | 4D               | 6AQ7GT          | 8CK              |               |                  |                         |                  |
| 5CZ5            | 9HN              |                |                  |                 |                  | 6BC8/<br>6BZ8 | 9AJ              | 6BS3                    | 9HP              |
| 5DH8            | 9EG              | 6A6            | 7B               | 6AQ8            | 9AJ              | 6BD4          | 8FU              | 6BS3A                   | 9HP              |
| 5DJ4            | 8KS              | 6A7            | 7C               | 6AQ8/<br>ECC85  | 9AJ              | 6BD4A         | 8FU              | 6BS8                    | 9AJ              |
| 5EA8            | 9AE              | 6A7S           | 7C               | 6AR5            | 6CC              | 6BD6          | 7BK              | 6BU8                    | 9FG              |
| 5ES8/<br>YCC189 | 9AJ              | 6A8            | 8A               | 6AR8            | 9DP              | 6BD11         | 12DP             | 6BV8                    | 9FS              |
| 5EU8            | 9JF              | 6A8G           | 8A               | 6AR11           | 12DM             | 6BE3/<br>6BZ3 | 12GA             | 6BV11                   | 12HB             |
| 5EW6            | 7CM              | 6A8GT          | 8A               | 6AS5            | 7CV              | 6BE6          | 7CH              | 6BW3                    | 12HF             |
| 5FG7            | 9GF              | 6AB4           | 5CE              | 6AS6            | 7CM              | 6BF5          | 7BZ              | 6BW4                    | 9DJ              |
| 5FV8            | 9FA              | 6AB5/<br>6N5   | 6R               | 6AS7G           | 8BD              |               |                  | 6BW8                    | 9HK              |
|                 |                  | 6AB7           | 8N               | 6AS8            | 9DS              |               |                  | 6BW11                   | 12HD             |
| 5GH8A           | 9AE              | 6AC5GT         | 6Q               | 6AS11           | 12DP             | 6BF6          | 7BT              | 6BX7GT                  | 8BD              |
| 5GJ7/<br>LCF801 | 9QA              | 6AC7           | 8N               | 6AT6            | 7BT              | 6BF11         | 12EZ             | 6BY5GA                  | 6CN              |
| 5GM6            | 7CM              | 6AC7W          | 8N               | 6AT8            | 9DW              | 6BG6G         | 5BT              | 6BY6                    | 7CH              |
| 5GS7            | 9GF              | 6AC10          | 12FE             | 6AT8A           | 9DW              | 6BH3          | 9HP              | 6BY8                    | 9FN              |
| 5GX6            | 7EN              | 6AD6G          | 7AG              | 6AU4GT          | 4CG              | 6BH3A         | 9HP              | 6BY11                   | 12EZ             |
| 5GX7            | 9QA              | 6AD7G          | 8AY              | 6AU4GTA         | 4CG              | 6BH6          | 7CM              | 6BZ6                    | 7CM              |
| 5HB7            | 9QA              | 6AD10          | 12EZ             | 6AU5GT          | 6CK              | 6BH8          | 9DX              | 6BZ7                    | 9AJ              |
|                 |                  | 6AE5GT         | 8Q               | 6AU6            | 7BK              | 6BH11         | 12FP             | 6BZ8                    | 9AJ              |

| Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram |
|----------|------------------|----------|------------------|----------|------------------|----------|------------------|----------|------------------|
| 6C4      | 6BG              | 6CX8     | 9DX              | 6EA8     | 9AE              | 6FS5     | 7GA              | 6GY6/    |                  |
| 6C5      | 6Q               | 6CY5     | 7EW              | 6EB8     | 9DX              | 6FV6     | 7FQ              | 6GX6     | 7EN              |
| 6C5GT    | 6Q               | 6CY7     | 9LG              | 6EC4/    |                  | 6FV8     | 9FA              | 6GY8     | 9MB              |
| 6C6      | 6F               | 6CZ5     | 9HN              | 6EC4/    | 6EC4             | 6FV8A    | 9FA              | 6GZ5     | 7CY              |
| 6C7      | 7G               | 6CZ7     | 8ET              | 6E4A     | 12FA             | 6FW5     | 6CK              | 6H6      | 7Q               |
| 6C8G     | 8G               | 6D4      | 5AY              | 6EH5     | 7CV              | 6FY5/    |                  | 6H6GT    | 7Q               |
| 6C9      | 10F              | 6D6      | 6F               | 6EH7     | 12FA             | 6FY5/    | 7FP              | 6HA5     | 7GM              |
| 6C10     | 12BQ             | 6D7      | 7H               | 6EH7/    |                  | 6FY7     | 12EO             | 6HA6     | 9NW              |
| 6CA4     | 9M               | 6D8G     | 8A               | 6EH7/    | 9AQ              | 6G6G     | 7S               | 6HB5     | 12BJ             |
|          |                  |          |                  | EF183    |                  |          |                  |          |                  |
| 6CA5     | 7CV              | 6D10     | 12BQ             | 6EH8     | 9JG              | 6G11     | 12BU             | 6HB6/    |                  |
| 6CA7/    |                  | 6DA4     | 4CG              | 6EJ4A    | 12HC             | 6GB3A    | 6AM              | 6HA6     | 9NW              |
| EL34     | 8ET              | 6DB5     | 9GR              | 6EJ7     | 9AQ              | 6GB5     | 9NH              | 6HB7     | 9QA              |
| 6CB5     | 8GD              | 6DC6     | 7CM              | 6EJ7     |                  | 6GB5/    |                  | 6HE5     | 12EY             |
| 6CB5A    | 8GD              | 6DC8     | 9HE              | 6EJ7     | 9AQ              | EL500    | 9NH              | 6HF5     | 12FB             |
| 6CB6A/   |                  | 6DC8/    |                  | EF184    |                  | 6GB6     | 6AM              | 6HF8     | 9DX              |
| 6CF6     | 7CM              | 6DC8/    | 9HE              | 6EL4     | 8GC              | 6GB7     | 6AM              | 6HG5     | 7BZ              |
|          |                  | EBF89    |                  | 6EM5     | 9HN              | 6GC5     | 9EU              | 6HG8     | 9MP              |
| 6CD3     | 12HF             | 6DE4     | 4CG              | 6EM7/    |                  | 6GE5     | 12BJ             | 6HG8/    |                  |
| 6CD6G    | 5BT              | 6DE6     | 7CM              | 6EA7     | 8BD              | 6GF5     | 12BJ             | ECF86    | 9MP              |
| 6CD6GA   | 5BT              | 6DE7     | 9HF              | 6EN4     | 8NJ              | 6GF7     | 9QD              | 6HJ5     | 12FL             |
| 6CE3     | 12HF             | 6DG6GT   | 7S               | 6EQ7     | 9LQ              |          |                  |          |                  |
| 6CE5     | 7BD              | 6DJ8/    |                  | 6ER5     | 7FP              | 6GF7A    | 9QD              | 6HJ8     | 9CY              |
| 6CF6     | 7CM              | ECC88    | 9AJ              | 6ES5     | 7FP              | 6GH8     | 9AE              | 6HK5     | 7GM              |
| 6CG3/    |                  | 6DK3     | 9SG              | 6ES8/    |                  | 6GH8A    | 9AE              | 6HL8     | 9AE              |
| 6CD3/    |                  | 6DK6     | 7CM              | 6ES8/    | ECC189           | 6GJ5     | 9QK              | 6HM5/    |                  |
| 6BW3     | 12HF             | 6DL4/    |                  | 6ET7     | 9LT              | 6GJ5A    | 9QK              | 6HA5     | 7GM              |
|          |                  | EC88     | 9NY              | 6EU7     | 9LS              | 6GJ7     | 9QA              | 6HM6     | 9PM              |
| 6CG7     | 9LP              | 6DL5     | 7DQ              | 6EU8     | 9JF              | 6GJ7/    |                  | 6HQ5     | 7GM              |
| 6CG8     | 9GF              | 6DL5/    |                  | 6EV5     | 7EW              | ECF801   | 9QA              | 6HR5     | 7BZ              |
| 6CG8A    | 9GF              | EL95     | 7DQ              | 6EV7     | 9LP              | 6GJ8     | 9AE              | 6HR6     | 7BK              |
| 6CH3     | 9HP              | 6DM4A    | 4CG              | 6EW6     | 7CM              |          |                  | 6HS5     | 12GY             |
| 6CH8     | 9FT              | 6DN3     | 9HP              | 6EW7     | 9HF              | 6GK5/    |                  | 6HS6     | 7BK              |
| 6CJ3/    |                  | 6DN6     | 5BT              | 6EX6     | 5BT              | 6FQ5A    | 7FP              | 6HS8     | 9FG              |
| 6CH3     | 9HP              | 6DN7     | 8BD              | 6EY6     | 7AC              | 6GK6     | 9GK              | 6HU6/    |                  |
| 6CK3     | 9HP              | 6DQ5     | 8JC              | 6EZ5     | 7AC              | 6GK17    | 4CG              | EM87     | 9GA              |
| 6CK4     | 8JB              | 6DQ6A    | 6AM              | 6EZ8     | 9KA              | 6GL7     | 8BD              | 6HU8/    |                  |
| 6CL3     | 9HP              | 6DQ6B    | 6AM              | 6F4      | 7BR              | 6GM5     | 9MQ              | ELL80    | 9NJ              |
| 6CL3/    |                  | 6DR7     | 9HF              | 6F5      | 5M               | 6GM6     | 7CM              | 6HV5     | 12GY             |
| 6CK3     | 9HP              | 6DS4     | 12AQ             | 6F5GT    | 5M               | 6GN8     | 9DX              | 6HV5A    | 12GY             |
| 6CL6     | 9BV              | 6DS5     | 7BZ              | 6F6      | 7S               | 6GQ7     | 9QM              | 6HZ5     | 12GY             |
| 6CL8     | 9FX              | 6DT5     | 9HN              | 6F6G     | 7S               | 6GS7     | 9GF              |          |                  |
| 6CL8A    | 9FX              | 6DT6     | 7EN              | 6F6GT    | 7S               | 6GT5     | 9NZ              | 6HZ5/    |                  |
| 6CM3     | 9HP              | 6DT6A    | 7EN              | 6F7      | 7E               | 6GT5A    | 9NZ              | 6JD5     | 12GY             |
| 6CM6     | 9CK              | 6DT8     | 9AJ              | 6F8G     | 8G               | 6GU5     | 7GA              | 6HZ6     | 7EN              |
| 6CM7     | 9ES              | 6DV4     | 12EA             | 6FA7     | 9MR              | 6GU7     | 9LP              | 6HZ8     | 9DX              |
| 6CM8     | 9FZ              | 6DW4     | 9HP              | 6FD7     | 9HF              | 6GV5     | 12DR             | 6J4      | 7BQ              |
| 6CN7     | 9EN              | 6DW4B    | 9HP              | 6FE5     | 8KB              | 6GV8     | 9LY              | 6J5      | 6Q               |
| 6CQ4     | 4CG              | 6DW5     | 9CK              | 6FG6/    |                  | 6GV8/    |                  | 6J5GT    | 6Q               |
| 6CQ8     | 9GE              | 6DX8     | 9HX              | EM84     | 9GA              | ECL85    | 9LY              | 6J6      | 7BF              |
| 6CR6     | 7EA              | 6DX8/    |                  | 6FG7     | 9GF              | 6GW6     | 6AM              | 6J6A     | 7BF              |
| 6CS6     | 7CH              | ECL84    | 9HX              | 6FH5     | 7FP              | 6GW6/    |                  | 6J6WA    | 7BF              |
| 6CS7     | 9EF              | 6DZ4     | 7DK              | 6FH8     | 9KP              | 6DQ6B    | 6AM              | 6J7      | 7R               |
| 6CU5     | 7CV              | 6DZ7     | 8JP              | 6FJ7     | 12BM             | 6GW8/    |                  | 6J7G     | 7R               |
| 6CU6     | 6AM              | 6E5      | 6R               | 6FM7     | 12EJ             | ECL86    | 9LZ              | 6J7GT    | 7R               |
| 6CU8     | 9GM              | 6E6      | 7B               | 6FM8     | 9KR              | 6GX6     | 7EN              | 6J8G     | 8H               |
| 6CW4     | 12AQ             | 6E7      | 7H               | 6FQ5A    | 7FP              | 6GX7     | 9QA              | 6J10     | 12BT             |
| 6CW5     | 9CV              | 6EA4     | 12FA             | 6FQ7     | 9LP              | 6GY5     | 12DR             | 6J11     | 12BW             |
| 6CW5/    |                  | 6EA5     | 7EW              | 6FQ7/    |                  | 6GY6     | 7EN              | 6JB5/    |                  |
| EL86     | 9CV              | 6EA7     | 8BD              | 6CG7     | 9LP              |          |                  | 6HE5     | 12EV             |

| Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram |
|----------|------------------|----------|------------------|----------|------------------|----------|------------------|----------|------------------|
| 6JB6     | 9QL              | 6KN8/    |                  | 6MK8A    | 9FG              | 6U8A/    |                  | 7L7      | 8V               |
| 6JB6A    | 9QL              | 6RHH8    | 9AJ              | 6MN8     | 12HU             | 6KD8     | 9AE              | 7N7      | 8AC              |
| 6JC6A    | 9PM              | 6KR8     | 9DX              | 6MQ8     | 9AE              | 6U9/     |                  | 7Q7      | 8AL              |
| 6JC8     | 9PA              | 6KS6     | 6DF              | 6MU8     | 9AE              | ECF201   | 10K              | 7R7      | 8AE              |
| 6JD6     | 9PM              | 6KT6     | 9PM              | 6MV8     | 9DX              | 6U10     | 12FE             | 7S7      | 8BL              |
| 6JE6     | 9QL              | 6KT8     | 9QP              | 6N6G     | 7AU              | 6V3A     | 9BD              | 7V7      | 8V               |
| 6JE6A    | 9QL              | 6KU8     | 9LT              | 6N7      | 8B               | 6V6      | 7AC              | 7X7      | 8BZ              |
| 6JE8     | 9DX              | 6KV6     | 9QU              | 6N7GT    | 8B               | 6V6GT    | 7AC              | 7Y4      | 5AB              |
| 6JF6     | 9QL              | 6KV6A    | 9QU              | 6P5GT    | 6Q               | 6V6GTA   | 7AC              | 7Z4      | 5AB              |
| 6JG6     | 9QU              | 6KV8     | 9DX              | 6P7G     | 7U               | 6V7G     | 7V               | 8A8      | 9DC              |
| 6JG6A    | 9QU              | 6KY8     | 9QT              | 6Q7      | 7V               | 6W4GT    | 4CG              | 8AC10    | 12FE             |
| 6JH5     | 12JE             | 6KY8A    | 9QT              | 6Q7G     | 7V               | 6W6GT    | 7AC              | 8AL9     | 12HE             |
| 6JH6     | 7CM              | 6KZ8     | 9FZ              | 6Q7GT    | 7V               | 6W7G     | 7R               | 8AR11    | 12DM             |
| 6JH8     | 9DP              | 6L5G     | 6Q               | 6Q11     | 12BY             | 6X4      | 5BS              | 8AU8     | 9DX              |
| 6JK6     | 7CM              | 6L6      | 7AC              | 6R7      | 7V               | 6X4W     | 5BS              | 8AW8A    | 9DX              |
| 6JK8     | 9AJ              | 6L6G     | 7AC              | 6R7G     | 7V               | 6X5      | 6S               | 8B8      | 9EX              |
| 6JM6     | 12FJ             | 6L6GB    | 7AC              | 6R7GT    | 7V               | 6X5GT    | 6S               | 8B10     | 12BF             |
| 6JM6A    | 12FJ             | 6L6GC    | 7AC              | 6RHH2    | 7BD              | 6X8A     | 9AK              | 8BA8A    | 9DX              |
| 6JN6     | 12FK             | 6L7      | 7T               | 6RHH8    | 9DE              | 6X9/     |                  | 8BA11    | 12ER             |
| 6JN8     | 9FA              | 6L7G     | 7T               | 6RK19    | 9CB              | ECF200   | 10K              | 8BH8     | 9DX              |
| 6JQ6     | 9RA              | 6LB6     | 12GJ             | 6S4      | 9AC              | 6Y6GA/   |                  | 8BM11    | 12FU             |
| 6JR6     | 9QU              | 6LB8     | 9DX              | 6S4A     | 9AC              | 6Y6G     | 7AC              | 8BN8     | 9ER              |
| 6JS6     | 12FY             | 6LC8     | 9QY              | 6S7      | 7R               | 6Y7G     | 8B               | 8BN11    | 12GF             |
| 6JS6A    | 12FY             | 6LE8     | 9QZ              | 6S7G     | 7R               | 6Y9/     |                  | 8BQ5     | 9CV              |
| 6JS6C    | 12FY             | 6LF6     | 12GW             | 6S8GT    | 8CB              | EFL201   | 10L              | 8BQ11    | 12DM             |
| 6JT6     | 9QU              | 6LF8     | 9DX              | 6SA7     | 8R               | 6Z4      | 5D               | 8BU11    | 12FP             |
| 6JT6A    | 9DX              | 6LH6A    | 8ML              | 6SA7GT   | 8AD              | 6Z5      | 6K               | 8CB11    | 12DM             |
| 6JT8     | 9QU              | 6LJ6     | 8MQ              | 6SB7Y    | 8R               | 6Z7G     | 8B               | 8CG7     | 9LP              |
| 6JU6     | 9QL              | 6LJ6A/   |                  | 6SC7     | 8S               | 6Z10/    |                  | 8CM7     | 9ES              |
| 6JU8     | 9PQ              | 6LH6A    | 8MQ              | 6SF5     | 6AB              | 6J10     | 12BT             | 8CN7     | 9EN              |
| 6JU8A    | 9PQ              | 6LJ8     | 9GF              | 6SF7     | 7AZ              | 6ZY5G    | 6S               | 8CS7     | 9EF              |
| 6JV8     | 9DX              | 6LM8     | 9AE              | 6SG7     | 8BK              | 7A5      | 6AA              | 8CW5/    |                  |
| 6JW8/    |                  | 6LN8     | 9DC              | 6SH7     | 8BK              | 7A6      | 7AJ              | XL86     | 9CV              |
| ECF802   | 9DC              | 6LN8/    |                  | 6SJ7     | 8N               | 7A7      | 8V               | 8CX8     | 9DX              |
| 6JZ6     | 12GD             | LCF80    | 9DC              | 6SJ7GT   | 8N               | 7A8      | 8U               | 8EB8     | 9DX              |
| 6JZ8     | 12DZ             | 6LQ6/    |                  | 6SJ7Y    | 8N               | 7AD7     | 8V               | 8EM5     | 9HN              |
| 6K5GT    | 5U               | 6JE6B    | 9QL              | 6SK7     | 8N               | 7AG7     | 8V               | 8ET7     | 9LT              |
| 6K6GT    | 7S               | 6LQ6/    |                  | 6SK7GT   | 8N               | 7AH7     | 8V               | 8FQ7     | 9LP              |
| 6K7      | 7R               | 6JE6C    | 9QL              | 6SL7GT   | 8BD              | 7AU7     | 9A               | 8FQ7/    |                  |
| 6K7G     | 7R               | 6LQ8     | 9DX              | 6SN7GT   | 8BD              | 7B4      | 5AC              | 8CG7     | 9LP              |
| 6K7GT    | 7R               | 6LR6     | 12FY             | 6SN7GTA  | 8BD              | 7B5      | 6AE              | 8GJ7     | 9QA              |
| 6K8      | 8K               | 6LR8     | 9QT              | 6SN7GTB  | 8BD              | 7B6      | 8W               | 8GJ7/    |                  |
| 6K8G     | 8K               | 6LT8     | 9RL              | 6SQ7     | 8Q               | 7B7      | 8V               | PCF801   | 9QA              |
| 6K8GT    | 8K               | 6LU8     | 12DZ             | 6SQ7GT   | 8Q               | 7C5      | 6AA              | 8GN8     | 9DX              |
| 6K11     | 12BY             | 6LX8/    |                  | 6SR7     | 8Q               | 7C6      | 8W               | 8GU7     | 9LP              |
| 6K11/    |                  | LCF802   | 9DC              | 6SS7     | 8N               | 7C7      | 8V               | 8JU8A    | 9PQ              |
| 6Q11     | 12BY             | 6LY8     | 9DX              | 6ST7     | 8Q               | 7E6      | 8W               | 8JV8     | 9DX              |
| 6KA8     | 9PV              | 6LZ6     | 9QL              | 6SZ7     | 8Q               | 7E7      | 8AE              | 8KA8     | 9PV              |
| 6KD6     | 12GW             | 6M11     | 12CA             | 6T4      | 7DK              | 7EY6     | 7AC              | 8LC8     | 9QY              |
| 6KD8     | 9AE              | 6MB8     | 9FA              | 6T7G     | 7V               | 7F7      | 8AC              | 8LT8     | 9RL              |
| 6KE8     | 9DC              | 6MD8     | 9RQ              | 6T8      | 9E               | 7F8      | 8BW              | 9A8      | 9DC              |
| 6KG6A/   |                  | 6ME6     | 9QL              | 6T8A     | 9E               | 7G7      | 8V               | 9A8/     |                  |
| EL509    | 9RJ              | 6ME8     | 9RU              | 6T9      | 12FM             | 7G8      | 9GF              | PCF80    | 9DC              |
| 6KL8     | 9LQ              | 6MF8     | 12DZ             | 6T10     | 12EZ             | 7HG8     | 9MP              | 9AH9     | 12HJ             |
| 6KM6     | 9QL              | 6MG8     | 9DC              | 6U5      | 6R               | 7HG8/    |                  | 9AK10    | 12FE             |
| 6KM8     | 9QG              | 6MHH3    | 7BF              | 6U7G     | 7R               | PCF86    | 9MP              | 9AM10    | 12FE             |
| 6KN6     | 12GU             | 6MJ8     | 12HG             | 6U8      | 9AE              | 7K7      | 8BF              | 9AQ8/    |                  |
|          |                  | 6MK8     | 9FG              |          |                  | 7KY6     | 9GK              | PCC85    | 9AJ              |

| Type No.        | Terminal Diagram | Type No.                   | Terminal Diagram | Type No.                   | Terminal Diagram | Type No.                  | Terminal Diagram | Type No.        | Terminal Diagram |
|-----------------|------------------|----------------------------|------------------|----------------------------|------------------|---------------------------|------------------|-----------------|------------------|
| 9AU7            | 9A               | 11CH11                     | 12GS             | 12AZ7                      | 9A               | 12DS7                     | 9JU              | 12JN6           | 12FK             |
| 9BJ11           | 12FU             | 11CY7                      | 9LG              | 12AZ7A                     | 9A               | 12DS7A                    | 9JU              | 12JN8           | 9FA              |
| 9BR7            | 9CF              | 11DS5                      | 7BZ              | 12B4A                      | 9AG              | 12DT5                     | 9HN              | 12JQ6           | 9RA              |
| 9CL8            | 9FX              | 11FY7                      | 12EO             | 12B8GT                     | 8T               | 12DT8                     | 9AJ              | 12JT6           | 9QU              |
| 9GH8A           | 9AE              | 11HM7                      | 9BF              | 12BA6                      | 7BK              | 12DV8                     | 9HR              | 12JT6A          | 9QU              |
| 9GV8            | 9LY              | 11JE8                      | 9DX              | 12BA7                      | 8CT              | 12DW4A                    | 9HP              | 12K5            | 7EK              |
| 9GV8/<br>XCL85  | 9LY              | 11KV8                      | 9DX              | 12BD6                      | 7BK              | 12DW7                     | 9A               | 12K7GT          | 7R               |
| 9JW8/<br>PCF802 | 9AE              | 11LQ8                      | 9EX              | 12BE3                      | 12GA             | 12DY8                     | 9JD              | 12K8            | 8K               |
|                 |                  | 11LT8                      | 9RL              | 12BE6                      | 7CH              | 12DZ6                     | 7BK              | 12KL8           | 9LQ              |
|                 |                  | 11MS8                      | 9LY              | 12BF6                      | 7BT              | 12EA6                     | 7BK              | 12L6GT          | 7AC              |
| 9KC6            | 9RF              | 11Y9                       | 10L              | 12BF11                     | 12EZ             | 12EC8                     | 9FA              | 12MD8           | 9RQ              |
| 9KX6            | 9GK              | 11Y9/<br>LFL200            | 10L              | 12BH7                      | 9A               | 12ED5                     | 7CV              | 12Q7GT          | 7V               |
| 9KZ8            | 9FZ              | 12A5                       | 7F               | 12BH7A                     | 9A               | 12EG6                     | 7CH              | 12RK19          | 9CB              |
| 9LA6            | 9GK              | 12A6                       | 7S               | 12BK5                      | 9BK              | 12EH5                     | 7CV              | 12S8GT          | 8CB              |
| 9RAL1           | 9HF              | 12A7                       | 7K               | 12BL6                      | 7BK              | 12EK6                     | 7BK              | 12SA7           | 8R               |
| 9UA8            | 8AE              | 12A8GT                     | 8A               | 12BN6                      | 7DF              | 12EK6/<br>12DZ6/<br>12EA6 | 7BK              | 12SA7GT         | 8AD              |
| 10              | 4D               | 12AB5                      | 9EU              | 12BQ6GT/<br>12CU6          | 6AM              | 12EL6                     | 7FB              | 12SC7           | 8S               |
| 10AL11          | 12BU             | 12AC6                      | 7BK              | 12BR3                      | 9CB              | 12EM6                     | 9HV              | 12SF5           | 6AB              |
| 10BQ5           | 9CV              | 12AC10A                    | 12FE             | 12BR7                      | 9CF              |                           |                  | 12SF5GT         | 6AB              |
| 10C8            | 9DA              |                            |                  |                            |                  |                           |                  | 12SF7           | 7AZ              |
| 10CW5           | 9CV              | 12AD6                      | 7CH              | 12BS3                      | 9HP              | 12EN6                     | 7AC              | 12SG7           | 8BK              |
| 10CW5/<br>LL86  | 9CV              | 12AE6                      | 7BT              | 12BS3A/<br>12DW4A          | 9HP              | 12EQ7                     | 9LQ              | 12SH7           | 8BK              |
| 10DE7           | 9HF              | 12AE7                      | 9A               | 12BT3                      | 12BL             | 12F5GT                    | 5M               | 12SJ7           | 8N               |
| 10DR7           | 9HF              | 12AE10                     | 12EZ             | 12BV7                      | 9BF              | 12F8                      | 9FH              | 12SJ7GT         | 8N               |
| 10DX8           | 9HX              | 12AF3/<br>12BR3/<br>12RK19 | 9CB              | 12BV11                     | 12HB             | 12FK6                     | 7BT              | 12SK7           | 8N               |
| 10DX8/<br>LCL84 | 9HX              | 12AF6                      | 7BK              | 12BW4                      | 9DJ              | 12FM6                     | 7BT              | 12SK7GT         | 8N               |
| 10EG7           | 8BD              | 12AH7GT                    | 8BE              | 12BY7                      | 9BF              | 12FQ7                     | 9LP              | 12SL7GT         | 8BD              |
| 10EM7           | 8BD              |                            |                  |                            |                  | 12FQ8                     | 9KT              | 12SN7GT         | 8BD              |
|                 |                  |                            |                  |                            |                  | 12FR8                     | 9KU              | 12SN7GTA        | 8BD              |
|                 |                  |                            |                  |                            |                  | 12FV7                     | 9A               | 12SQ7           | 8Q               |
| 10EW7           | 9HF              | 12AJ6                      | 7BT              | 12BY7A/<br>12BV7/<br>12DQ7 | 9BF              | 12FX5                     | 7CV              | 12SQ7GT         | 8Q               |
| 10GF7           | 9QD              | 12AL5                      | 6BT              |                            |                  | 12FX8                     | 9KV              | 12SR7           | 8Q               |
| 10GF7A          | 9QD              | 12AL8                      | 9GS              | 12BZ6                      | 7CM              | 12FX8A                    | 9KV              | 12SR7GT         | 8Q               |
| 10GK6           | 9GK              | 12AL11                     | 12BU             | 12BZ7                      | 9A               | 12GA6                     | 7CH              | 12SW7           | 8Q               |
| 10GN8           | 9DX              | 12AQ5                      | 7BZ              | 12C5                       | 7CV              | 12GB3                     | 6AM              | 12SX7GT         | 8BD              |
| 10GV8/<br>LCL85 | 9LY              | 12AT6                      | 7BT              | 12C8                       | 8E               | 12GB6                     | 6AM              | 12SY7           | 8R               |
| 10HE8           | 9DX              | 12AT7/<br>ECC81            | 9A               | 12CA5                      | 7CV              | 12GB7                     | 6AM              | 12T10           | 12EZ             |
| 10JA8/<br>10LZ8 | 9DX              | 12AT7WA                    | 9A               | 12CL3                      | 9HP              | 12GC6                     | 8JX              | 12U7            | 7CK              |
|                 |                  | 12AT7WB                    | 9A               | 12CN5                      | 7CV              | 12GE5                     | 12BJ             | 12V6GT          | 7AC              |
|                 |                  |                            |                  |                            |                  | 12GJ5                     | 9BK              | 12W6GT          | 7AC              |
| 10JT8           | 9DX              | 12AU6                      | 7BK              | 12CR6                      | 7EA              | 12GJ5A                    | 9QK              | 12X4            | 5BS              |
| 10Y8            | 9DX              | 12AU7                      | 9A               | 12CT3                      | 9RX              | 12GN7                     | 9BF              | 12Z3            | 6G               |
| 10KR8           | 9DX              | 12AU7A/<br>ECC82           | 9A               | 12CT8                      | 9DA              | 12GN7A                    | 9BF              | 13CW4           | 12AQ             |
| 10KU8           | 9LT              | 12AV5GA                    | 6CK              | 12CU5/<br>12C5             | 7CV              | 12GT5                     | 9NZ              | 13DE7           | 9HF              |
| 10LB8           | 9DX              | 12AV6                      | 7BT              | 12CU6                      | 6AM              | 12GT5A                    | 9NZ              | 13DR7           | 9HF              |
| 10LE8           | 9QZ              | 12AV7                      | 9A               | 12CX6                      | 7BK              | 12GW6/<br>12DQ6B          | 6AM              | 13EM7           | 8BD              |
| 10LW8           | 9DX              | 12AW6                      | 7CM              | 12D4                       | 4CG              | 12H6                      | 7Q               | 13EM7/<br>15EA7 | 8BD              |
| 10LZ8           | 9DX              | 12AX3                      | 12BL             | 12DB5                      | 9GR              | 12HE7                     | 12ES             | 13FD7           | 9HF              |
| 10T10           | 12EZ             | 12AX4GT                    | 4CG              | 12DE8                      | 9HG              | 12HG7                     | 9BF              | 13FM7           | 12EJ             |
| 10Z10           | 12BT             |                            |                  |                            |                  |                           |                  |                 |                  |
| 11              | 4F               | 12AX4GTA                   | 4CG              | 12DK6                      | 7CM              | 12HG7/<br>12GN7A          | 9BF              | 13FM7/<br>15FM7 | 12EJ             |
| 11AF9           | 10L              | 12AX4GTB                   | 4CG              | 12DK7                      | 9HZ              | 12HL7                     | 9BF              | 13GB5           | 9NH              |
| 11AR11          | 12DM             | 12AX7                      | 9A               | 12DL8                      | 9HR              | 12J5GT                    | 6Q               | 13GB5/<br>XL500 | 9NH              |
| 11BM8           | 9EX              | 12AX7A/<br>ECC83           | 9A               | 12DM4                      | 4CG              | 12J7GT                    | 7R               | 13GF7           | 9QD              |
| 11BQ11          | 12DM             | 12AY3                      | 9HP              | 12DM4A                     | 4CG              | 12J8                      | 9GC              | 13GF7A          | 9QD              |
| 11BT11          | 12GS             | 12AY3A                     | 9HP              | 12DQ6A                     | 6AM              | 12JB6                     | 9QL              | 13J10           | 12BT             |
| 11CA11          | 12HN             | 12AY7                      | 9A               | 12DQ6B                     | 6AM              | 12JB6A                    | 9QL              |                 |                  |
| 11CF11          | 12HW             |                            |                  | 12DQ7                      | 9BF              |                           |                  |                 |                  |

| Type No.         | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No.  | Terminal Diagram | Type No. | Terminal Diagram |
|------------------|------------------|----------|------------------|----------|------------------|-----------|------------------|----------|------------------|
| 13JZ8            | 12DZ             | 17BB14   | 9NH              | 18AJ10   | 12EZ             | 22BW3     | 12FX             | 26       | 4D               |
| 13V10            | 12EZ             | 17BE3/   |                  | 18FW6    | 7CC              | 22DE4     | 4CG              | 26A6     | 7BK              |
| 13Z10            | 12BT             | 17BZ3    | 12GA             | 18FW6A   | 7CC              | 22JF6     | 9QL              | 26A7GT   | 8BU              |
| 13Z10/<br>13J10  | 12BT             | 17BF11   | 12EZ             | 18FX6    | 7CH              | 22JG6     | 9QU              | 26C6     | 7BT              |
| 14A4             | 5AC              | 17BH3    | 9HP              | 18FX6A   | 7CH              | 22JG6A    | 9QU              | 26D6     | 7CH              |
| 14A5             | 6AA              | 17BJ6    | 9QL              | 18FY6    | 7BT              | 22JR6     | 9QU              | 26HU5    | 8NB              |
| 14A7             | 8V               | 17BQ6GTB | 6AM              | 18FY6A   | 7BT              | 22JU6     | 9QL              | 26LW6    | 8NC              |
| 14AF7            | 8AC              | 17BR3    | 9CB              | 18GB5/   |                  | 22KM6     | 9QL              | 26LX6    | 12JA             |
| 14B6             | 8W               | 17BR3/   |                  | LL500    | 9NH              | 22KV6A    | 9QU              | 27       | 5A               |
|                  |                  | 17K19    | 9CB              |          |                  | 23JS6A    | 12FY             |          |                  |
| 14B8             | 8X               | 17BS3    | 9HP              | 18GD6A   | 7BK              | 23JZ8     | 12DZ             | 27GB5/   |                  |
| 14BL11           | 12GC             | 17BS3A/  |                  | 18GV8/   |                  | 23Z9      | 12GZ             | PL500    | 9NH              |
| 14BR11           | 12GL             | 17DW4A   | 9HP              | PCL85    | 9LY              | 24A       | 5E               | 29KQ6/   |                  |
| 14C5             | 6AA              | 17BW3    | 12FX             | 19       | 6C               | 24BF11    | 12EZ             | PL521    | 9RJ              |
| 14C7             | 8V               | 17BZ3    | 12FX             | 19AU4    | 4CG              | 24JE6A    | 9QL              | 29LE6    | 9RJ              |
| 14E6             | 8W               | 17C5     | 7CV              | 19AU4GTA | 4CG              | 24JZ8     | 12DZ             | 30       | 4D               |
| 14E7             | 8AE              | 17C9     | 10F              | 19BG6G   | 5BT              | 24LQ6/    |                  | 30AE3/   |                  |
| 14F7             | 8AC              | 17CK3    | 9HP              | 19BG6GA  | 5BT              | 24JE6C    | 9QL              | PY88     | 9CB              |
| 14F8             | 8BW              | 17CT3    | 9RX              | 19CG3    | 12HF             | 24LZ6     | 9QL              | 30JZ6    | 12GD             |
| 14GT8            | 9KR              | 17CU5/   |                  | 19CL8A   | 9FA              | 25A6      | 7S               | 30KD6    | 12GW             |
| 14H7             | 8V               | 17C5     | 7CV              | 19DE3    | 12HX             | 25A6GT    | 7S               | 30MB6    | 12FY             |
| 14J7             | 8BL              | 17D4     | 4CG              | 19EA8    | 9AE              | 25A7GT    | 8F               | 31       | 4D               |
| 14JG8            | 9KR              | 17DE4    | 4CG              | 19EZ8    | 9KA              | 25AC5GT   | 6Q               | 31AL10   | 12HR             |
| 14N7             | 8AC              | 17DM4    | 4CG              | 19FX5    | 7CV              | 25AV5GA   | 6CK              | 31JS6A   | 12FY             |
| 14R7             | 8AE              | 17DM4A   | 4CG              | 19GQ7    | 9QM              | 25AX4GT   | 4CG              | 31JS6C   | 12FY             |
| 15               | 5F               | 17DQ6A   | 6AM              | 19HR6    | 7BK              | 25B5      | 6D               | 31LQ6    | 9QL              |
| 15AF11           | 12DP             | 17DQ6B   | 6AM              | 19HS6    | 7BK              | 25B6G     | 7S               | 31LR8    | 9QT              |
| 15BD11           | 12DP             | 17DW4A   | 9HP              | 19HV8    | 9FA              | 25B8GT    | 8T               | 31LZ6    | 9QL              |
| 15BD11A          | 12DP             | 17EW8    | 9AJ              | 19J6     | 7BF              | 25BK5     | 9BQ              | 32       | 4K               |
| 15CW5            | 9CV              | 17EW8/   |                  | 19JN8/   |                  | 25BQ6GT   | 6AM              | 32A5     | 6AA              |
| 15CW5/<br>PL84   | 9CV              | HCC85    | 9AJ              | 19CL8A   | 9FA              | 25BQ6GTB/ |                  | 32ET5    | 7CV              |
| 15DQ8/<br>PCL84  | 9HX              | 17GB3    | 6AM              | 19KG8    | 9LY              | 25CU6     | 6AM              | 32ET5A   | 7CV              |
| 15FM7            |                  | 17GE5    | 12BJ             | 19MR9    | 7BK              | 25C5      | 7CV              | 32HQ7    | 12HT             |
| 15FY7            | 12EO             | 17GJ5    | 9QK              | 19T8     | 9E               | 25C6G     | 7AC              | 32L7GT   | 8Z               |
| 15KY8            | 9QT              | 17GJ5A   | 9QK              | 19X8     | 9AK              | 25CA5     | 7CV              | 33       | 5K               |
| 15KY8A           | 9QT              | 17GT5    | 9NZ              | 20       | 4D               | 25CD6GA   | 5BT              | 33GT7    | 12FC             |
| 15LE8            | 9QZ              | 17GT5A   | 9NZ              | 20AQ3/   |                  | 25CD6GB   | 5BT              | 33GY7    | 12FN             |
| 15MF8            | 12DZ             | 17GV5    | 12DR             | LY88     | 9CB              | 25CG3     | 12HF             | 33GY7A   | 12FN             |
|                  |                  | 17GW6/   |                  | 20EQ7    | 9LQ              | 25CK3     | 9HP              | 33JR6    | 9QU              |
|                  |                  | 17DQ6B   | 6AM              | 20EZ7    | 9PG              | 25CT3     | 9RX              | 33JV6    | 12FK             |
| 16A8/<br>PCL82   | 9EX              | 17H3     | 9FK              | 20LF6    | 12GW             | 25CU6     | 6AM              | 34       | 4M               |
| 16AK9            | 12GZ             | 17HB25   | 17HB25           | 21EX6    | 5BT              | 25DN6     | 5BT              | 34CE3    | 12GK             |
| 16AQ3            | 9CB              | 17JB6A   | 9QL              | 21GY5    | 12DR             | 25E5/     |                  | 34GD5    | 7CV              |
| 16AQ3/<br>XY88   | 9CB              | 17JF6    | 9QL              | 21HB5    | 12BJ             | PL36      | 8GT              | 34GD5A   | 7CV              |
| 16BQ11           | 12DM             | 17JG6    | 9QU              | 21HB5A   | 12BJ             | 25EC6     | 5BT              | 34R3     | 9CB              |
| 16BX11           | 12CA             | 17JG6A   | 9QU              | 21HJ5    | 12FL             | 25EH5     | 7CV              | 35       | 5E               |
| 16GK6            | 9GK              | 17JM6A   | 12FJ             | 21JS6A   | 12FY             | 25F5A     | 7CV              | 35B5     | 7BZ              |
| 16GY5            | 12DR             | 17JN6    | 12FK             | 21JV6    | 12FK             | 25HX5     | 9SB              | 35C5     | 7CV              |
|                  |                  | 17JQ6    | 9RA              | 21JZ6    | 12GD             | 25JZ8     | 12DZ             | 35DZ8    | 9JE              |
|                  |                  | 17JT6    | 9QU              | 21KA6    | 12GH             | 25L6      | 7AC              | 35EH5    | 7CV              |
| 16LU8A           | 12DZ             | 17JT6A   | 9QU              | 21KQ6    | 9RJ              | 25L6GT/   |                  | 35GL6    | 7FZ              |
| 17AB10/<br>17X10 | 12BT             | 17JZ8    | 12DZ             | 21LG6    | 12HL             | 25W6GT7AC |                  | 35L6GT   | 7AC              |
| 17AX3            | 12BL             | 17KV6A   | 9QU              | 21LG6A   | 12HL             | 25N6G     | 7W               | 35LR6    | 12FY             |
| 17AX4GT          | 4CG              | 17LD8    | 9QT              | 21LR8    | 9QT              | 25W4GT    | 4CG              | 35W4     | 5BQ              |
| 17AX4GTA         | 4CG              | 17RK19   | 9CB              | 21LU8    | 12DZ             | 25W6GT    | 7AC              | 35Y4     | 5AL              |
| 17AY3            | 9HP              | 17X10    | 12BT             | 22       | 4K               | 25Y5      | 6E               | 35Z4GT   | 5AA              |
| 17AY3A           | 9HP              | 17Z3/    |                  | 22BH3    | 9HP              | 25Z6      | 7Q               | 35Z5GT   | 6AD              |
|                  |                  | PY81     | 9CB              | 22BH3A   | 9HP              | 25Z6GT    | 7Q               | 36       | 5E               |

| Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram |
|----------|------------------|----------|------------------|----------|------------------|----------|------------------|----------|------------------|
| 36AM3    | 5BQ              | 117L7/   |                  | 5842/    |                  | 6677/    |                  | 8058     | 12CT             |
| 36AM3A   | 5BQ              | M7GT     | 8AO              | 417A     | 9V               | GCL6     | 9BV              | 8077/    |                  |
| 36AM3B   | 5BQ              | 117N7GT  | 8AV              | 5844     | 7BF              | 6678/    |                  | 7054     | 9GK              |
| 36KD6    | 12GW             | 117P7GT  | 8AV              | 5847/    |                  | 608A     | 9AE              | 8106     | 9PL              |
| 36KD6/   |                  | 117Z3    | 4CB              | 404A     | 9X               | 6679/    |                  | 8136     | 5C               |
| 40KD6    | 12GW             | 117Z4GT  | 5AA              | 5879     | 9AD              | 12AT7    | 9A               | 8203     | 12AQ             |
| 36MC6    | 9QL              | 117Z6GT  | 7Q               | 5881     | 7S               | 6680/    |                  | 8393     | 12AQ             |
| 37       | 5A               | 407A     | 407A             | 5896     | 8DJ              | 12AU7A   | 9A               | 8417     | 7S               |
| 38       | 5F               | 408A     | 7BD              | 5899     | 8DE              | 6681/    |                  | 8532     | 7BQ              |
| 38HE7    | 12FS             | 884      | 6Q2              | 5902     | 8DE              | 12AX7A   | 9A               | 8627     | 12CT             |
| 38HK7    | 12FS             | 955      | 5BC              | 5915     | 7CH              | 6688A    | 9EQ              | 8628     | 12AQ             |
| 39/44    | 5F               | 959      | 5BE              | 5963     | 9A               | 6814     | 8DK              | 8808     | 8808             |
| 40       | 4D               | 991      | 991              | 5964     | 7BF              | 6887     | 6BT              | 9002     | 7BS              |
| 40KD6    | 12GW             | 1612     | 7T               | 5965     | 9A               | 6922/    |                  | 9001     | 7BD              |
| 40KG6A/  |                  | 1613     | 7S               | 6005     | 7BZ              | E88CC    | 9AJ              | 9003     | 7BD              |
| PL509    | 9RJ              | 1614     | 7S               | 6012     | 6CO              | 6939     | 9HL              | 9005     | 5BG              |
| 41       | 6B               | 1619     | 7AW              | 6021     | 8DG              | 6973     | 9EU              | 9006     | 6BH              |
| 42       | 6B               | 1620     | 7R               | 6072     | 9A               | 6977     | 6977             | A61      | 4G               |
| 42EC4A/  |                  | 1621     | 7S               | 6073     | 5B0              | 7025     | 9A               | A863     | 7R               |
| PY500    | 6EC4             | 1622     | 7S               | 6073/    |                  | 7027     | 8HY              | AD17     | 6AU              |
| 42KN6    | 12GU             | 1629     | 7AL              | OA2      | 5B0              | 7027A    | 8HY              | B36      | 8BD              |
| 43       | 6B               | 1635     | 8B               | 6074     | 5B0              | 7044     | 9H               | B65      | 8BD              |
| 45       | 4D               | 2050     | 6BS              | 6074/    |                  | 7054     | 9GK              | B152     | 9A               |
| 45Z3     | 5AM              | 2050A    | 6BS              | OB2      | 5B0              | 7055     | 6BT              | B309     | 9A               |
| 45Z5GT   | 6AD              | 2076/    |                  | 6080     | 8BD              | 7056     | 7CM              | B329     | 9A               |
| 46       | 5C               | 5R4GYB   | 5T               | 6080WA   | 8BD              | 7057     | 9AJ              | B339     | 9A               |
| 47       | 5B               | 5636     | 8DC              | 6082     | 8BD              | 7058     | 9EP              | B719     | 9AJ              |
| 48       | 6A               | 5639     | 8DE              | 6111     | 8DG              | 7059     | 9AE              | B739     | 9A               |
| 49       | 5C               | 5642     | 5642             | 6112     | 8DG              | 7060     | 9DA              | B749     | 9A               |
| 50       | 4D               | 5651A    | 5B0              | 6186     | 7BD              | 7061     | 9EU              | B759     | 9A               |
| 50A5     | 6AA              | 5651WA   | 5B0              | 6189     | 9A               | 7167     | 7EW              | BPM04    | 7BZ              |
| 50B5     | 7BZ              | 5654     | 7BD              | 6197     | 9BV              | 7189     | 9BL              | CFX80    | 9AE              |
| 50BM8/   |                  | 5663     | 6CE              | 6202     | 5BS              | 7199     | 9JT              | D2M9     | 6BT              |
| UCL82    | 9EX              | 5670     | 8CJ              | 6206     | 8DC              | 7247     | 9A               | D63      | 6BT              |
| 50C5     | 7CV              | 5672     | 5672             | 6211     | 9A               | 7258     | 9DA              | D152     | 6BT              |
| 50C6G    | 7AC              | 5678     | 5678             | 6336A    | 8BD              | 7308     | 9AJ              | DA90     | 5AP              |
| 50DC4    | 5BQ              | 5686     | 9G               | 6350     | 9CZ              | 7355     | 8KN              | DAF91    | 6AU              |
| 50EH5    | 7CV              | 5687     | 9H               | 6360A    | 6360A            | 7360     | 9KS              | DAF92    | 6BW              |
| 50FE5    | 8KB              | 5691     | 8BD              | 6386     | 8CJ              | 7408     | 7AC              | DF33     | 5Y               |
| 50FK5    | 7CV              | 5692     | 8BD              | 6417     | 9K               | 7543     | 7BK              | DF91     | 6AR              |
| 50GY7A   | 12FN             | 5693     | 8N               | 6485     | 5C               | 7551     | 9LK              | DF904    | 6AR              |
| 50HC6    | 7FZ              | 5696     | 7BN              | 6550     | 7S               | 7558     | 9LK              | DH63     | 7V               |
| 50HK6    | 7FZ              | 5696A    | 7BN              | 6626/    |                  | 7581A    | 7AC              | DH77     | 7BT              |
| 50JY6    | 8MG              | 5718     | 8DK              | OA2WA    | 5B0              | 7586     | 12AQ             | DK91     | 7AT              |
| 50L6GT   | 7AC              | 5719     | 8DK              | 6660/    |                  | 7587     | 12AS             | DL012    | 9E               |
| 50X6     | 7DX              | 5725     | 7CM              | 6BA6     | 7BK              | 7591     | 8KQ              | DL31     | 6X               |
| 50Y6GT   | 7Q               | 5726     | 6BT              | 6661/    |                  | 7591A    | 8KQ              | DL33     | 7AP              |
| 50Y7GT   | 8AN              | 5727     | 7BN              | 6BH6     | 7CM              | 7695     | 9PX              | DL91     | 7AV              |
| 50Z7G    | 8AN              | 5734     | 5734             | 6662/    |                  | 7717/    |                  | DL92     | 7BA              |
| 53       | 7B               | 5749     | 7BK              | 6BJ6     | 7CM              | 6CY5     | 7EW              | DL94     | 6BX              |
| 53HK7    | 12FS             | 5750     | 7CH              | 6663/    |                  | 7724/    |                  | DL95     | 7BA              |
| 60FX5    | 7CV              | 5751     | 9A               | 6AL5     | 6BT              | 14GT8    | 9KR              | DP61     | 7BD              |
| 70L7GT   | 8AA              | 5763     | 9K               | 6664/    |                  | 7868     | 9NZ              | DY30     | 3C               |
| 75       | 6G               | 5783     | 5783             | 6AB4     | 5CE              | 7895     | 12AQ             | DY80     | 9Y               |
| 78       | 6F               | 5814A    | 9A               | 6669/    |                  | 7898     | 9EP              | DY87     | 9DT              |
| 80       | 4C               | 5823     | 4CK              | 6AQ5A    | 7BZ              | 7905     | 9PB              | E81CC    | 9A               |
| 83       | 4C               | 5824     | 7S               | 6676/    |                  | 8016     | 3C               | E82CC    | 9A               |
| 84/6Z4   | 5D               | 5840     | 8DE              | 6CB6A    | 7CM              | 8056     | 12AQ             | E83CC    | 9A               |



| Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram | Type No. | Terminal Diagram |
|----------|------------------|----------|------------------|----------|------------------|----------|------------------|----------|------------------|
| EEA91    | 6BT              | EF190    | 7CM              | KT77     | 8N               | OC2      | 5B0              | U70      | 5AA              |
| EABC80   | 9E               | EF811    | 9AQ              | KT81     | 6AA              | OC3      | 4AJ              | U74      | 5AA              |
| EB34     | 7Q               | EF814    | 9AQ              | KT88     | 8EP              | OC3A     | 4AJ              | U76      | 5BS              |
| EB91     | 6BT              | EF905    | 7BD              | KTW63    | 7R               | OD3      | 4AJ              | U78      | 5BS              |
| EBC90    | 7BT              | EFL200   | 10L              | KT263    | 7R               | OD3A     | 4AJ              | U707     | 5DA              |
| EBC91    | 7BT              | EFL201   | 10L              | L63      | 6Q               | OSW3104  | 8R               | U709     | 9M               |
| EBF85    | 9HE              | EH90     | 7CH              | L63B     | 6Q               | OSW3105  | 8Q               | UCL82    | 9EX              |
| EBF89    | 9HE              | EK90     | 7CH              | L77      | 6BG              | OSW3106  | 7AC              | UCL83    | 9EX              |
| EC88     | 9NY              | EL22     | 6AA              | LC900    | 7GM              | OSW3110  | 6R               | UU12     | 9M               |
| EC90     | 6BG              | EL34     | 8ET              | LCF80    | 9DC              | OSW3111  | 8N               | V153     | 4G               |
| EC92     | 5CE              | EL37     | 7AC              | LCF86    | 9MP              | OZ4      | 4R               | V741     | 6BG              |
| EC94     | 7DK              | EL84     | 9CV              | LCF201   | 10K              | OZ4A     | 4R               | VSM70    | 5BS              |
| EC95     | 7FP              | EL86     | 9CV              | LCF801   | 9QA              | OZ4G     | 4R               | W17      | 6AR              |
| EC97     | 7FP              | EL90     | 7BZ              | LCF802   | 9AE              | PC95     | 7FP              | W61      | 7R               |
| EC900    | 7GM              | EL95     | 7DQ              | LCL82    | 9EX              | PC900    | 7GM              | W63      | 7R               |
| ECC32    | 8BD              | EL180    | 9BF              | LCL84    | 9HX              | PCC18    | 9A               | W81      | 8V               |
| ECC35    | 8BD              | EL500    | 9NH              | LCL85    | 9LY              | PCC85    | 9AJ              | W143     | 8V               |
| ECC81    | 9A               | EL509    | 9RJ              | LF183    | 9AQ              | PCF80    | 9DC              | W148     | 8V               |
| ECC82    | 9A               | EM35     | 6R               | LF184    | 9AQ              | PCF82    | 9DX              | W272     | 7BK              |
| ECC83    | 9A               | EM84     | 9GA              | LF200    | 10L              | PCF86    | 9MP              | X17      | 7AT              |
| ECC85    | 9AJ              | EM87     | 9GA              | LFL200   | 10L              | PCF801   | 9QA              | X63      | 8A               |
| ECC88    | 9AJ              | EM840    | 7S               | LL86     | 9CV              | PCF802   | 9AE              | X77      | 7CH              |
| ECC89    | 9DE              | EY81F    | 9BD              | LL500    | 9NH              | PCL82    | 9EX              | X107     | 6CH              |
| ECC91    | 7BF              | EY88     | 9CB              | LN119    | 9EX              | PCL84    | 9HX              | X150     | 12BQ             |
| ECC180   | 9AJ              | EY500    | 6EC4             | LY88     | 9CB              | PCL85    | 9LY              | X727     | 7CH              |
| ECC186   | 9A               | EZ4      | 9M               | LZ319    | 9DC              | PCL800   | 9GK              | XC95     | 7FP              |
| ECC189   | 9AJ              | EZ35     | 6S               | LZ329    | 9DC              | PH4      | 8A               | XC97     | 7FP              |
| ECC801   | 9A               | EZ90     | 5BS              | M709     | 9CV              | PL36     | 8GT              | XC900    | 7GM              |
| ECC802   | 9A               | EZ900    | 5BS              | M8080    | 6BG              | PL84     | 9CV              | XCC82    | 9A               |
| ECC803   | 9A               | GZ30     | 5T               | M8081    | 7BF              | PL500    | 9NH              | XCC189   | 9AJ              |
| ECF80    | 9DC              | GZ32     | 5DA              | M8108    | 7BK              | PL509    | 9RJ              | XCF80    | 9DC              |
| ECF82    | 9AE              | GZ34     | 5DA              | M8136    | 9A               | PL521    | 9RJ              | XCF801   | 9QA              |
| ECF86    | 9MP              | GZ37     | 5DA              | M8137    | 9A               | PM04     | 7BK              | XCL85    | 9LY              |
| ECF200   | 10K              | H63      | 5M               | M8162    | 9A               | PM05     | 7BD              | XF94     | 7BK              |
| ECF201   | 10K              | HAA91    | 6BT              | M8245    | 7BZ              | PY81     | 4G               | XF183    | 9AQ              |
| ECF801   | 9QA              | HBC90    | 7BT              | N16      | 7AP              | PY83     | 4G               | XF184    | 9AQ              |
| ECF802   | 9AE              | HBC91    | 7BT              | N17      | 7BA              | PY88     | 4G               | 9CV      | XL84             |
| ECH42    | 12BQ             | HCC85    | 9AJ              | N18      | 7BA              | PY500    | 6EC4             | XL86     | 9CV              |
| ECL82    | 9EX              | HD14     | 5Z               | N19      | 6BX              | PY800    | 4G               | XL500    | 9NH              |
| ECL84    | 9HX              | HD94     | 6AM              | N63      | 7S               | QA2401   | 6BG              | XXA-91   | 6BT              |
| ECL85    | 9LY              | HD96     | 6AM              | N148     | 6AA              | QA2404   | 6BT              | XY88     | 9CB              |
| ECL86    | 9LZ              | HF93     | 7BK              | N308     | 8GT              | QA2406   | 9A               | Y61      | 6R               |
| ECL180   | 8CK              | HF94     | 7BK              | N369     | 9EX              | QB309    | 9A               | YC95     | 7FP              |
| EF22     | 8V               | HK90     | 7CH              | N727     | 7BZ              | QL77     | 6BG              | YCC189   | 9AJ              |
| EF37     | 7R               | HL92     | 7CV              | OA2      | 5B0              | R-19     | 9Y               | YCL180   | 9AJ              |
| EF80     | 9FN              | HM04     | 7CH              | OA2WA    | 5B0              | R-52     | 5DA              | YF183    | 9AQ              |
| EF93     | 7BK              | HY90     | 5BQ              | OA3      | 4AJ              | RJ2      | 5T               | YF184    | 9AQ              |
| EF94     | 7BK              | HZ90     | 5BS              | OA3A     | 4AJ              | T2M05    | 7BF              | Z14      | 5Y               |
| EF95     | 7BD              | KT-32    | 7AC              | OA4G     | 4V               | U41      | 3C               | Z63      | 7R               |
| EF96     | 7BD              | KT-63    | 7S               | OB2      | 5B0              | U50      | 5T               |          |                  |
| EF183    | 9AQ              | KT66     | 7AC              | OB2WA    | 5B0              | U52      | 5T               |          |                  |
| EF184    | 9AQ              | KT71     | 7AC              | OB3      | 8Q               | U54      | 5DA              |          |                  |

## KEY TO TERMINAL DIAGRAMS

## LETTER COMBINATIONS

DJA = Deflecting Electrode A  
 DJB = Deflecting Electrode B  
 F = Filament End (Unpolarized)  
 F+ = Filament End (Positive only)  
 F- = Filament End (Negative only)  
 Fx = Filament Tap  
 G = Grid  
 G<sub>1</sub>, G<sub>2</sub>, etc. = Grid No. 1, Grid No. 2, etc.  
 H = Heater End (Unpolarized)

HA = Heater End A  
 HB = Heater End B  
 HI = Heater Insulator  
 Hx = Heater Tap  
 IC = Do Not Use  
 IS = Internal Shield (Electrostatic)  
 JPR = Jumper End  
 K = Cathode  
 LC = May be used only under Limited Conditions  
 NC = No Internal Connection  
 NC G = No Base Connection, glass tube

P = { Plate (Vacuum tubes)  
 Anode (Gas-filled tubes)  
 PA = Plate A  
 PB = Plate B  
 RCJ = Ray-Control Electrode  
 REM = Remote  
 S = Metal Shell  
 SM = Shell connection, metal tube  
 SHP = Sharp  
 STR = Starter  
 TA = Fluorescent Target  
 TC = Top Cap  
 \* = Gas Filled

## SUBSCRIPTS FOR MULTIUNIT TYPES

B = Beam Power Unit  
 D = Diode Unit  
 HP = Heptode Unit

HX = Hexode Unit  
 P = Pentode Unit  
 T = Triode Unit

TR = Tetrode Unit  
 1, 2, 3, etc. = No. 1, No. 2, No. 3, etc.

| Terminal Diagram | PIN NUMBER |     |     |       |    |     |      |    |   |    |    |    | TC |  |    |
|------------------|------------|-----|-----|-------|----|-----|------|----|---|----|----|----|----|--|----|
|                  | 1          | 2   | 3   | 4     | 5  | 6   | 7    | 8  | 9 | 10 | 11 | 12 |    |  |    |
| 3C               | LC         | F   | LC  | LC    | LC | LC  | F,IS | LC |   |    |    |    |    |  | P  |
| 4AA*             | F          | P   | NC  | NC    | IC | G   | NC   | F  |   |    |    |    |    |  |    |
| 4AJ*             | NC         | K   | JPR |       | P  |     | JPR  | NC |   |    |    |    |    |  |    |
| 4C               | PD2        | PD1 | F   | F     |    |     |      |    |   |    |    |    |    |  |    |
| 4CB              | IC         | NC  | H   | H     | P  | K   | NC   |    |   |    |    |    |    |  |    |
| 4CG              | IC         | IC  | K   |       | P  |     | H    | H  |   |    |    |    |    |  |    |
| 4CK*             | P          | IC  | K   | STR   | IC | IC  | K    |    |   |    |    |    |    |  |    |
| 4D               | F          | P   | G   | F     |    |     |      |    |   |    |    |    |    |  |    |
| 4F               | F          | P   | F   | G     |    |     |      |    |   |    |    |    |    |  |    |
| 4G               | H          | P   | K   | H     |    |     |      |    |   |    |    |    |    |  |    |
| 4K               | F          | P   | G2  | F     |    |     |      |    |   |    |    |    |    |  | G1 |
| 4M               | F+         | P   | G2  | F-,G3 |    |     |      |    |   |    |    |    |    |  | G1 |
| 4R*              | S          | NC  | P2  |       | P1 |     | NC   | K  |   |    |    |    |    |  |    |
| 4V*              | NC         | K   | NC  |       | P  |     | STR  | NC |   |    |    |    |    |  |    |
| 4Z               | H          | P   | NC  | NC    | NC | NC  | K    | H  |   |    |    |    |    |  |    |
| 5A               | H          | P   | G   | K     | H  |     |      |    |   |    |    |    |    |  |    |
| 5AA              | NC         | H   | NC  |       | P  |     | H    | K  |   |    |    |    |    |  |    |
| 5AB              | H          | NC  | PD2 | NC    | NC | PD1 | K    | H  |   |    |    |    |    |  |    |

| Terminal Diagram | PIN NUMBER  |     |      |      |       |     |     |       |   |    |            |             |    |
|------------------|-------------|-----|------|------|-------|-----|-----|-------|---|----|------------|-------------|----|
|                  | 1           | 2   | 3    | 4    | 5     | 6   | 7   | 8     | 9 | 10 | 11         | 12          | TC |
| 5AC              | H           | P   | NC   | NC   | NC    | G   | K   | H     |   |    |            |             |    |
| 5AD              | F+          | P   | G2   | NC   | NC    | G1  | NC  | F-,G3 |   |    |            |             |    |
| 5AG              | F+,IS       | PT  | NC   | PD   | NC    | GT  | NC  | F-    |   |    |            |             |    |
| 5AL              | H           | P   | NC   | HM   | NC    | NC  | K   | H     |   |    |            |             |    |
| 5AM              | H           | P   | IC   | K    | NC    | P   | H   |       |   |    |            |             |    |
| 5AP              | H           | P   | K    | NC   | IC    | P   | H   |       |   |    |            |             |    |
| 5AY              | G           | NC  | H    | H    | K     | NC  | P   |       |   |    |            |             |    |
| 5B               | F           | P   | G1   | G2   | F     |     |     |       |   |    |            |             |    |
| 5BC              | H           | P   | G    | H    | K     |     |     |       |   |    |            |             |    |
| 5BE              | F+          | G2  | G3   | F-   | F-    |     |     |       |   |    | TOP LEAD P | BOT LEAD G1 |    |
| 5BG              | HB          | K   | P    | HA   | HA    |     |     |       |   |    |            |             |    |
| 5BO*             | P           | K   | IC   | K    | P     | IC  | K   |       |   |    |            |             |    |
| 5BQ              | NC          | NC  | H    | H    | P     | HL  | K   |       |   |    |            |             |    |
| 5BS              | PD2         | NC  | H    | H    | NC    | PD1 | K   |       |   |    |            |             |    |
| 5BT              | NC          | H   | K,G3 | NC   | G1    | NC  | H   | G2    |   |    |            |             | P  |
| 5C               | F           | P   | G1   | G2   | F     |     |     |       |   |    |            |             |    |
| 5CE              | P           | NC  | H    | H    | NC    | G   | K   |       |   |    |            |             |    |
| 5D               | H           | PD2 | PD1  | K    | H     |     |     |       |   |    |            |             |    |
| 5DA              | IC          | H   | PD2  | PD1  | H,K   |     |     |       |   |    |            |             |    |
| 5DE              | F           | IC  | F    |      | PD2   |     | PD1 |       |   |    |            |             |    |
| 5E               | H           | P   | G2   | K    | H     |     |     |       |   |    |            |             | G1 |
| 5F               | H           | P   | G2   | K,G3 | H     |     |     |       |   |    |            |             | G1 |
| 5K               | F+          | P   | G1   | G2   | F-,G3 |     |     |       |   |    |            |             |    |
| 5L               | NC          | H   |      | PD2  |       | PD1 | H,K |       |   |    |            |             |    |
| 5M               | NC G<br>S M | H   | NC   | P    | NC    |     | H   | K     |   |    |            |             | G  |
| 5Q               | NC          | NC  | PD2  | NC   | PD1   | NC  | F   | F     |   |    |            |             |    |
| 5R               | NC          | F   | P    | G2   | NC    |     | F   | NC    |   |    |            |             | G1 |

| Terminal<br>Diagram | PIN NUMBER   |        |     |     |              |     |              |            |   |    |    |    |    |
|---------------------|--------------|--------|-----|-----|--------------|-----|--------------|------------|---|----|----|----|----|
|                     | 1            | 2      | 3   | 4   | 5            | 6   | 7            | 8          | 9 | 10 | 11 | 12 | TC |
| 5S                  | NC           | F      | P   | NC  | G            | NC  | F            | NC         |   |    |    |    |    |
| 5T                  | NC<br>S      | G<br>M | F   |     | PD2          |     | PD1          |            | F |    |    |    |    |
| 5U                  |              | H      | P   |     | NC           |     | H            | K          |   |    |    |    | G1 |
| 5Y                  | BC           | F+     | P   | G2  | NC           |     | F-, IS<br>G3 | NC         |   |    |    |    | G1 |
| 5Z                  | BC           | F+     | PT  | NC  | PD           |     | F-           | NC         |   |    |    |    | GT |
| 6A                  | H            | P      | G2  | G1  | K            | H   |              |            |   |    |    |    |    |
| 6AA                 | H            | P      | G2  | NC  | NC           | G1  | K, G3        | H          |   |    |    |    |    |
| 6AB                 | NC<br>S      | G<br>M | K   | G   |              | P   |              | H          | H |    |    |    |    |
| 6AD                 | NC           | H      | HM  |     | P            |     | H            | K          |   |    |    |    |    |
| 6AE                 | H            | P      | G2  | NC  | NC           | G1  | K, G3        | H          |   |    |    |    |    |
| 6AF                 | NC           | F+     | P   | G2  | G1           |     | F-, G3       | NC         |   |    |    |    |    |
| 6AM                 | NC           | H      | NC  | G2  | G1           |     | H            | K, G3      |   |    |    |    | P  |
| 6AR                 | F-, IS<br>G3 | P      | G2  | NC  | F-, IS<br>G3 | G1  | F+           |            |   |    |    |    |    |
| 6AS                 | H            | PT2    | PT1 | GT1 | K            | H   |              |            |   |    |    |    |    |
| 6AU                 | F-,<br>G3P   | NC     | PD  | G2P | PP           | G1P | F+           |            |   |    |    |    |    |
| 6AX                 | F+           | PP     | G2P | PD  | NC           | G1P | NC           | F-,<br>G3P |   |    |    |    |    |
| 6B                  | H            | P      | G2  | G1  | K<br>G3      | H   |              |            |   |    |    |    |    |
| 6BA                 | F+           | P      | G2  | NC  | NC           | G1  | FM<br>G3     | F-         |   |    |    |    |    |
| 6BG                 | P            | IC     | H   | H   | P            | G   | K            |            |   |    |    |    |    |
| 6BH                 | P            | K      | H   | H   | P            | NC  | K            |            |   |    |    |    |    |
| 6BS*                |              | H      | P   | NC  | G1           | G2  | H            | K          |   |    |    |    |    |
| 6BT                 | KD2          | PD1    | H   | H   | KD1          | IS  | PD2          |            |   |    |    |    |    |
| 6BW                 | F-,<br>G3P   | PP     | G2P | PD  | NC           | G1P | F+           |            |   |    |    |    |    |
| 6BX                 | F-           | P      | G2  | NC  | FM, G3       | G1  | F+           |            |   |    |    |    |    |

| Terminal Diagram | PIN NUMBER |           |           |           |       |           |           |     |         |    |    |    | TC  |
|------------------|------------|-----------|-----------|-----------|-------|-----------|-----------|-----|---------|----|----|----|-----|
|                  | 1          | 2         | 3         | 4         | 5     | 6         | 7         | 8   | 9       | 10 | 11 | 12 |     |
| 6C               | F          | PT2       | GT2       | GT1       | PT1   | F         |           |     |         |    |    |    |     |
| 6CC              | G1         | G3,K      | H         | H         | P     | G2        | NC        |     |         |    |    |    |     |
| 6CE*             | G1         | K         | H         | H         | G2    | NC        | P         |     |         |    |    |    |     |
| 6CK              | G1         | H         | G3,K      |           | P     |           | H         | G2  |         |    |    |    |     |
| 6CN              | KD2        | H         | IC        | PD2       | PD1   |           | H         | KD1 |         |    |    |    |     |
| 6CO*             | K          | H         | G1        |           | P     |           | H         | G2  |         |    |    |    |     |
| 6D               | H          | PT2       | PT1       | GT1       | K     | H         |           |     |         |    |    |    |     |
| 6E               | H          | PD2       | KD2       | KD1       | PD1   | H         |           |     |         |    |    |    |     |
| 6F               | H          | P         | G2        | G3        | K,JS  | H         |           |     |         |    |    |    | G1  |
| 6G               | H          | PT        | PD2       | PD1       | K     | H         |           |     |         |    |    |    | G1  |
| 6J               | H          | ES        | PD2       | K         | PD1   | H         |           |     |         |    |    |    |     |
| 6K               | HM         | H         | PD2       | K         | PD1   | H         |           |     |         |    |    |    |     |
| 6L               | F          | P         | G2        | G1        | G3,G5 | F         |           |     |         |    |    |    | G4  |
| 6M               | F          | PT        | PD2       | PD1       | GT    | F         |           |     |         |    |    |    |     |
| 6Q               | NC<br>S    | G<br>M    | H         | P         |       | G         |           | H   | K       |    |    |    |     |
| 6R               | H          | PT<br>RCJ | GT        | TA        | K     | H         |           |     |         |    |    |    |     |
| 6S               | NC<br>S    | G<br>M    | H         | PD2       |       | PD1       |           | H   | K       |    |    |    |     |
| 6W               | F+         | PP        | G2P       | PD2       | PD1   | F-<br>G3P |           |     |         |    |    |    | G1P |
| 6X               | NC         | F+        | P         | G2        | G1    |           | F-,G3     |     |         |    |    |    |     |
| 7AA              | NC         | F+        | PT        | PD2       | PD1   | GT        | F-        | NC  |         |    |    |    |     |
| 7AB              | NC         | F         | PT2       | GT2       | GT1   | PT1       | F         | NC  |         |    |    |    |     |
| 7AC              | NC<br>S    | G<br>M    | H         | P         | G2    | G1        |           | H   | K<br>G3 |    |    |    |     |
| 7AF              | NC         | F+        | PP        | PD2       | PD1   | G2P       | F-<br>G3P | NC  |         |    |    |    | G1P |
| 7AG              | NC         | H         | RCJB      | RCJA      | TA    |           | H         | K   |         |    |    |    |     |
| 7AH              | NC         | H         | PT<br>REM | PT<br>SHP | G     |           | H         | K   |         |    |    |    |     |

| Terminal<br>Diagram | PIN NUMBER |            |           |     |       |      |            |       |   |    |    |    |    |
|---------------------|------------|------------|-----------|-----|-------|------|------------|-------|---|----|----|----|----|
|                     | 1          | 2          | 3         | 4   | 5     | 6    | 7          | 8     | 9 | 10 | 11 | 12 | TC |
| 7AJ                 | H          | KD2        | PD2       | NC  | IS    | PD1  | KD1        | H     |   |    |    |    |    |
| 7AK                 | F          | P          | G2        | G1  | G3,G5 | G4   | NC         | F     |   |    |    |    |    |
| 7AL                 | NC         | H          | PT<br>RCJ | TA  | GT    |      | H          | K     |   |    |    |    |    |
| 7AM                 | NC         | F+         | PP        | G2P | G1P   | PD   | F—<br>G3P  | NC    |   |    |    |    |    |
| 7AO                 | F+         | P          | G2        | G3  | F—,IS | G1   | NC         | F—,IS |   |    |    |    |    |
| 7AP                 | NC         | F+         | P         | G2  | G1    |      | F—         | G3,FM |   |    |    |    |    |
| 7AQ                 | NC         | F          | P         | G2  | G1    |      | F          | FM,G3 |   |    |    |    |    |
| 7AT                 | F—,G5      | P          | G2,G4     | G1  | F—,G5 | G3   | F+         |       |   |    |    |    |    |
| 7AU                 | NC         | H          | PT2       | PT1 | GT1   |      | H          | K     |   |    |    |    |    |
| 7AV                 | F—,G3      | P          | G1        | G2  | F—,G3 | P    | F+         |       |   |    |    |    |    |
| 7AW                 | S          | F          | P         | G2  | G1    |      | F          | G3    |   |    |    |    |    |
| 7AX                 | NC         | H          | P         | GB  | KB    | GA   | H          | KA    |   |    |    |    |    |
| 7AZ                 | S          | G1P        | K,G3P     | G2P | PD    | PP   | H          | H     |   |    |    |    |    |
| 7B                  | H          | PT2        | GT2       | K   | GT1   | PT1  | H          |       |   |    |    |    |    |
| 7BA                 | F          | P          | G1        | G2  | FM,G3 | P    | F+         |       |   |    |    |    |    |
| 7BB                 | F—         | P          | G2        | G1  | FM    | P    | F+         |       |   |    |    |    |    |
| 7BC                 | F—         | PT2        | GT2       | FM  | GT1   | PT1  | F+         |       |   |    |    |    |    |
| 7BD                 | G1         | K,IS<br>G3 | H         | H   | P     | G2   | K,IS<br>G3 |       |   |    |    |    |    |
| 7BF                 | PT2        | PT1        | H         | H   | GT1   | GT2  | K          |       |   |    |    |    |    |
| 7BK                 | G1         | G3,IS      | H         | H   | P     | G2   | K          |       |   |    |    |    |    |
| 7BN*                | G1         | K          | H         | H   | G2    | P    | G2         |       |   |    |    |    |    |
| 7BQ                 | G,IS       | K          | H         | H   | G,IS  | G,IS | P          |       |   |    |    |    |    |
| 7BR                 | H          | G          | P         | P   | G     | H    | K          |       |   |    |    |    |    |
| 7BS                 | P          | K          | H         | H   | P     | G    | K          |       |   |    |    |    |    |
| 7BT                 | GT         | K          | H         | H   | PD2   | PD1  | PT         |       |   |    |    |    |    |
| 7BZ                 | G1         | K,G3       | H         | H   | P     | G2   | G1         |       |   |    |    |    |    |
| 7C                  | H          | P          | G3,G5     | G2  | G1    | K    | H          |       |   |    |    |    |    |

| Terminal Diagram | PIN NUMBER |             |     |            |       |             |            |    |   |    |    |    | TC  |
|------------------|------------|-------------|-----|------------|-------|-------------|------------|----|---|----|----|----|-----|
|                  | 1          | 2           | 3   | 4          | 5     | 6           | 7          | 8  | 9 | 10 | 11 | 12 |     |
| 7CC              | G1         | G3,IS       | H   | H          | P     | G2          | K          |    |   |    |    |    |     |
| 7CN              | G1         | K,G5        | H   | H          | P     | G2,G4       | G3         |    |   |    |    |    |     |
| 7CK              | K,IS<br>G3 | H           | G2  | K,IS<br>G3 | G1    | K,IS<br>G3  | H          | BC |   |    |    |    | P   |
| 7CM              | G1         | K           | H   | H          | P     | G2          | G3,IS      |    |   |    |    |    |     |
| 7CV              | K,G3       | G1          | H   | H          | G1    | G2          | P          |    |   |    |    |    |     |
| 7CY              | G2         | FM,G3<br>IS | G1  | F          | F     | FM,G3<br>IS | P          |    |   |    |    |    |     |
| 7D               | H          | PP          | G2P | PD2        | PD1   | K,G3P       | H          |    |   |    |    |    | G1P |
| 7DC              | F          | P           | G2  | G1         | G3,G5 | G4          | F          |    |   |    |    |    |     |
| 7DF              | K,IS       | G1          | H   | H          | G2    | G3          | P          |    |   |    |    |    |     |
| 7DK              | P          | G           | H   | H          | K     | G           | P          |    |   |    |    |    |     |
| 7DQ              | G1         | K,G3        | H   | H          | P     | G2          | G1         |    |   |    |    |    |     |
| 7DX              | H          | KD2         | PD2 | NC         | NC    | PD1         | KD1        | H  |   |    |    |    |     |
| 7E               | H          | PP          | G2P | PT         | GT    | K,G3P       | H          |    |   |    |    |    | G1P |
| 7EA              | K,G3P      | PD          | H   | H          | PP    | G2P         | G1P        |    |   |    |    |    |     |
| 7EG              | K          | G           | H   | H          | P     | K           | G          |    |   |    |    |    |     |
| 7EK              | K          | G2          | H   | H          | G1    | G1          | P          |    |   |    |    |    |     |
| 7EN              | G1         | K,IS        | H   | H          | P     | G2          | G3         |    |   |    |    |    |     |
| 7EW              | G1         | K,IS        | H   | H          | P     | G2          | K,IS       |    |   |    |    |    |     |
| 7F               | H          | P           | G2  | G1         | K,G3  | HM          | H          |    |   |    |    |    |     |
| 7FB              | GT         | PT          | H   | H          | PD2   | PD1         | K          |    |   |    |    |    |     |
| 7FL              | NC         | PD2         | H   | H          | K     | IS          | PD1        |    |   |    |    |    |     |
| 7FP              | K          | G2          | H   | H          | P     | IS          | K          |    |   |    |    |    |     |
| 7FQ              | G1         | IS          | H   | H          | P     | G2          | K          |    |   |    |    |    |     |
| 7FZ              | K,G3       | G1          | H   | H          | G2    | HM          | P          |    |   |    |    |    |     |
| 7G               | H          | PT          | ES  | PD2        | PD1   | K           | H          |    |   |    |    |    | G1T |
| 7GA              | G1         | K,G2<br>G4  | H   | H          | P     | G3          | K,G2<br>G4 |    |   |    |    |    |     |
| 7GM              | G1         | K           | H   | H          | P     | IS          | K          |    |   |    |    |    |     |

| Terminal<br>Diagram | PIN NUMBER   |        |       |       |          |           |           |   |   |    |    |           | TC  |
|---------------------|--------------|--------|-------|-------|----------|-----------|-----------|---|---|----|----|-----------|-----|
|                     | 1            | 2      | 3     | 4     | 5        | 6         | 7         | 8 | 9 | 10 | 11 | 12        |     |
| 7H                  | H            | P      | G2    | G3    | ES       | K         | H         |   |   |    |    |           | G1  |
| 7K                  | H            | PP     | G2P   | KD    | PD       | KP<br>G3P | H         |   |   |    |    |           | G1P |
| 7Q                  | NC<br>S      | G<br>M | H     | PD2   | KD2      | PD1       | H         |   |   |    |    | KD1       |     |
| 7R                  | NC<br>S      | G<br>M | H     | P     | G2       | G3        | H         |   |   |    |    | K<br>IS   |     |
| 7S                  | NC<br>S      | G<br>M | H     | P     | G2       | G1        | H         |   |   |    |    | K<br>G3   |     |
| 7T                  | NC<br>S      | G<br>M | H     | P     | G2<br>G4 | G3        | H         |   |   |    |    | K<br>G5   | G1  |
| 7U                  | NC           | H      | H     | PP    | G2P      | PT        | G1        |   |   |    |    | K,G3P     | G1P |
| 7V                  | NC           | H      | PT    | PD2   | PD1      |           | H         |   |   |    |    | K         | GT  |
| 7W                  | NC           | H      | PT2   | PT1   | GT1      |           | H         |   |   |    |    | K         |     |
| 7Z                  | BC           | F      | P     | G3,G5 | G1       | G2        | F         |   |   |    |    | NC        | G4  |
| 8A                  | NC<br>S      | G<br>M | H     | P     | G3<br>G5 | G1        | G2        | H |   |    |    | K         | G4  |
| 8AA                 | KD           | H      | PB    | G2B   | G1B      | KB<br>G3B | H         |   |   |    |    | PD        |     |
| 8AC                 | H            | KT2    | PT2   | GT2   | GT1      | PT1       | KT1       | H |   |    |    |           |     |
| 8AD                 | NC           | H      | P     | G2,G4 | G1       | K,G5      | H         |   |   |    |    | G3        |     |
| 8AE                 | H            | PP     | PD2   | PD1   | G2P      | G1P       | K,G3P     | H |   |    |    |           |     |
| 8AJ                 | NC           | F+     | PP    | G2P   | G1P      | PT        | F—<br>G3P |   |   |    |    | PD        | GT  |
| 8AL                 | H            | P      | G2,G4 | G1    | G5       | G3        | K         | H |   |    |    |           |     |
| 8AN                 | NC           | H      | PD2   | KD2   | PD1      | HM        | H         |   |   |    |    | KD1       |     |
| 8AO                 | KD           | H      | PB    | G1B   | G2B      | PD        | H         |   |   |    |    | KB<br>G3B |     |
| 8AS                 | FM,IS<br>G3P | F      | PP    | G2P   | GT       | PT        | F—        |   |   |    |    | PD        | GT  |
| 8AV                 | NC           | H      | PB    | G1B   | G2B      | KB<br>G3B | PD<br>H   |   |   |    |    | KD        |     |
| 8AY                 | GT           | H      | PP    | G2P   | G1P      | PT        | H         |   |   |    |    | K,G3P     |     |
| 8B                  | NC<br>S      | G<br>M | H     | PT2   | GT2      | GT1       | PT1       | H |   |    |    | K         |     |



| Terminal Diagram | PIN NUMBER |                   |      |              |              |       |              |       |   |    |    |    |     |
|------------------|------------|-------------------|------|--------------|--------------|-------|--------------|-------|---|----|----|----|-----|
|                  | 1          | 2                 | 3    | 4            | 5            | 6     | 7            | 8     | 9 | 10 | 11 | 12 | TC  |
| 8BD              | GT2        | PT2               | KT2  | GT1          | PT1          | KT1   | H            | H     |   |    |    |    |     |
| 8BE              | GT2        | KT2               | PT2  | KT1          | GT1          | PT1   | H            | H     |   |    |    |    |     |
| 8BF              | H          | KT                | PT   | GT           | PD2          | PD1   | KD1<br>KD2   | H     |   |    |    |    |     |
| 8BJ              | H          | P                 | G2   | K            | IS,G3        | G1    | K            | H     |   |    |    |    |     |
| 8BK              | S          | H                 | K,G3 | G1           | K,G3         | G2    | H            | P     |   |    |    |    |     |
| 8BL              | H          | PHP               | PT   | GT<br>G3HP   | G2HP<br>G4HP | G1HP  | K,IS<br>G5HP | H     |   |    |    |    |     |
| 8BU              | G1B1       | K<br>G3B1<br>G3B2 | G1B2 | PB2          | G2B1<br>G2B2 | H     | H            | PB1   |   |    |    |    |     |
| 8BW              | GT2        | H                 | PT2  | KT2          | KT1          | PT1   | H            | GT1   |   |    |    |    |     |
| 8BZ              | H          | PT2               | G1   | KT,IS<br>KD1 | PD1          | PD2   | KD2          | H     |   |    |    |    |     |
| 8C               | NC         | F+                | PP2  | G1P2         | G1P1         | PP1   | F-,G3        | G2    |   |    |    |    |     |
| 8CB              | PD3        | KT<br>KD2<br>KD3  | PD1  | PD2          | KD1          | PT    | H            | H     |   |    |    |    | GT  |
| 8CH              | G          | H                 | TA   | DJ2          | DJ3          | DJ1   | H            | K     |   |    |    |    |     |
| 8CJ              | H          | KT2               | GT2  | PT2          | IS           | PT1   | GT1          | KT1   | H |    |    |    |     |
| 8CK              | PD2        | KD1<br>KD2        | PD1  | GT           | PT           | KT    | H            | H     |   |    |    |    |     |
| 8CN              | IC         | G1                | NC   | F-,G5        | F+           | P     | G2,G4        | G3    |   |    |    |    |     |
| 8CP              | NC         | G1                | NC   | F-,G3        | F+           | NC    | P            | G2    |   |    |    |    |     |
| 8CT              | G2,G4      | G1                | K    | H            | H            | G5,IS | G3           | IS    | P |    |    |    |     |
| 8DA              | PP         | NC                | G1P  | F-<br>G3P    | F+           | PD    | NC           | G2P   |   |    |    |    |     |
| 8DC              | G1         | K,IS              | H    | G3           | P            | H     | G2           | K,IS  |   |    |    |    |     |
| 8DE              | G1         | K,G3              | H    | K,G3         | P            | H     | G2           | K,G3  |   |    |    |    |     |
| 8DG              | PT2        | GT2               | H    | KT2          | KT1          | H     | GT1          | PT1   |   |    |    |    |     |
| 8DJ              | PD2        | KD2               | H    | IS           | PD1          | H     | KD1          | NC    |   |    |    |    |     |
| 8DK              | G          | NC                | H    | NC           | K            | H     | NC           | P     |   |    |    |    |     |
| 8E               | BC         | H                 | PP   | PD2          | PD1          | G2P   | H            | K,G3P |   |    |    |    | G1P |

| Terminal<br>Diagram | PIN NUMBER |    |      |              |            |      |           |           |   |    |    |    |      |
|---------------------|------------|----|------|--------------|------------|------|-----------|-----------|---|----|----|----|------|
|                     | 1          | 2  | 3    | 4            | 5          | 6    | 7         | 8         | 9 | 10 | 11 | 12 | TC   |
| 8EL                 | G          | H  | NC   |              | P          |      | H         | K         |   |    |    |    |      |
| 8EP                 | G3         | H  | P    | G2           | G1         | NC   | H         | K         |   |    |    |    |      |
| 8ET                 | G3         | H  | P    | G2           | G1         | NC   | H         | K         |   |    |    |    |      |
| 8EZ                 | LC         | H  | LC   |              | LC         |      | H,K<br>IS |           |   |    |    |    | P    |
| 8F                  | KD         | H  | PP   | G2P          | G1P        | PD   | H         | KP<br>G3P |   |    |    |    |      |
| 8FU                 | K          | H  | NC   |              | NC         |      | H         | NC        |   |    |    |    | P    |
| 8G                  | NC         | H  | PT2  | KT2          | GT1        | PT1  | H         | KT1       |   |    |    |    | GT2  |
| 8GB                 | IC         | IC | K    | IC           | P          | IC   | H         | H         |   |    |    |    |      |
| 8GC                 | K          | H  | IC   | IC           | G          | IC   | H         | IC        |   |    |    |    | P    |
| 8GD                 | G2         | H  | G3,K | G1           | G1         | G3,K | H         | G2        |   |    |    |    | P    |
| 8GH                 | LC         | H  | LC   | LC           | LC         | LC   | H,K<br>IS | LC        |   |    |    |    | P    |
| 8GT                 | IC         | H  | IC   | G2           | G1         |      | H         | K,G3      |   |    |    |    | P    |
| 8H                  | NC         | H  | PHP  | G2HP<br>G4HP | GT<br>G3HP | PT   | H         | K<br>G5HP |   |    |    |    | G1HP |
| 8HY                 | G2         | H  | P    | G2           | G1         | G1   | H         | K,G3      |   |    |    |    |      |
| 8JB                 | G          | H  | G    |              | P          |      | H         | K         |   |    |    |    |      |
| 8JC                 | G1         | H  | G3,K | G2           | G1         | G3,K | H         | G2        |   |    |    |    | P    |
| 8JP                 | G1P2       | H  | PP2  | G2           | G1P1       | PP1  | H         | K,G3      |   |    |    |    |      |
| 8JX                 |            | H  | K,G3 | G2           | G1         |      | H         | G2        |   |    |    |    | P    |
| 8K                  | S          | H  | PHX  | G2HX<br>G4HX | GT<br>G1HX | PT   | H         | K         |   |    |    |    | G3HX |
| 8KB                 |            | H  | P    | G2           | G1         | H    | K,G3      |           |   |    |    |    |      |
| 8KN                 |            | H  | P    |              | G3,K       | G1   | H         | G2        |   |    |    |    |      |
| 8KQ                 |            | H  | P    | G2           | G3,K       | G1   | H         | G2        |   |    |    |    |      |
| 8KS                 | F          | F  | PD2  | PD2          | PD1        | PD1  | F         | F         |   |    |    |    |      |
| 8MG                 | IS         | H  | G3   | G2           | G1         | NC   | H         | K         |   |    |    |    | P    |
| 8MH                 | LC         | H  | LC   |              | LC         |      | H,K<br>IS | LC        |   |    |    |    | P    |
| 8MK                 | IC         | F  | IC   |              | IC         |      | F,IS      | IC        |   |    |    |    | P    |

| Terminal Diagram | PIN NUMBER |      |      |       |       |     |              |           |    |    |    |    | TC |     |
|------------------|------------|------|------|-------|-------|-----|--------------|-----------|----|----|----|----|----|-----|
|                  | 1          | 2    | 3    | 4     | 5     | 6   | 7            | 8         | 9  | 10 | 11 | 12 |    |     |
| 8ML              | IS         | H    | IC   | IC    | G     | K   | H            | IC        |    |    |    |    |    | P   |
| 8MQ              | IC         | H    | IS   | IC    | G     | K   | H            | IC        |    |    |    |    |    | P   |
| 8MT              | NC         | IC   | H    | IC    | IC    | IC  | NC           | H,K<br>IS |    |    |    |    |    | P   |
| 8MU              | IC         | H    | IC   | NC    | IC    | NC  | H,K<br>IS    | IC        |    |    |    |    |    | P   |
| 8MW              | K,IS       | H    | IC   | IC    | G     | NC  | H            | IC        |    |    |    |    |    | P   |
| 8MX              | H,K<br>IS  | H    | IC   | NC    | IC    | NC  | H,K<br>IS    | IC        |    |    |    |    |    | P   |
| 8MZ              | F,IS       | F    | F,IS | NC    | F,IS  | NC  | F,IS         | NC        |    |    |    |    |    | P   |
| 8N               | S          | H    | G3   | G1    | K     | G2  | H            | P         |    |    |    |    |    |     |
| 8NB              | G1         | K,G3 | G2   | NC    | G1    | IC  | H            | H         |    |    |    |    |    | P   |
| 8NC              | IC         | K,G3 | G2   | NC    | G1    | IC  | H            | H         |    |    |    |    |    | P   |
| 8ND              | NC         | IC   | F    | IC    | F     | IC  | NC           | F,IS      |    |    |    |    |    | P   |
| 8NJ              | K,IS       | H    | IC   | IC    | G     | G   | H            | IC        |    |    |    |    |    | P   |
| 8Q               | S          | GT   | K    | PD2   | PD1   | PT  | H            | H         |    |    |    |    |    |     |
| 8R               | S,G3       | H    | P    | G2,G4 | G1    | K   | H            | G3        |    |    |    |    |    |     |
| 8S               | S          | PT2  | GT2  | GT1   | PT1   | K   | H            | H         |    |    |    |    |    |     |
| 8T               | KP<br>G3P  | H    | PP   | G2P   | PT    | KT  | H            | GT        |    |    |    |    |    | G1P |
| 8U               | H          | P    | G2   | G1    | G3,G5 | G4  | K,G6         | H         |    |    |    |    |    |     |
| 8V               | H          | P    | G2   | G3    | IS    | G1  | K            | H         |    |    |    |    |    |     |
| 8W               | H          | PT   | GT   | IC    | PD2   | PD1 | IS,K         | H         |    |    |    |    |    |     |
| 8X               | H          | P    | G2   | G1    | G3,G5 | G4  | K            | H         |    |    |    |    |    |     |
| 8Y               | G3,S       | H    | NC   | G1    | K     | G2  | H            | P         |    |    |    |    |    |     |
| 8Z               | KD         | H    | PB   | G2B   | G1B   | PD  | H            | KB<br>G3B |    |    |    |    |    |     |
| 9A               | PT2        | GT2  | KT2  | HT2   | HT1   | PT1 | GT1          | KT1       | HM |    |    |    |    |     |
| 9AC              | IC         | K    | G    | H     | H     | G   | IC           | IC        | P  |    |    |    |    |     |
| 9AD              | G1         | NC   | K    | H     | H     | NC  | G2           | P         | G3 |    |    |    |    |     |
| 9AE              | PT         | G1P  | G2P  | H     | H     | PP  | KP,IS<br>G3P | KT        | GT |    |    |    |    |     |

| Terminal Diagram | PIN NUMBER |     |       |           |             |           |              |                  |              |    |    |    |    |
|------------------|------------|-----|-------|-----------|-------------|-----------|--------------|------------------|--------------|----|----|----|----|
|                  | 1          | 2   | 3     | 4         | 5           | 6         | 7            | 8                | 9            | 10 | 11 | 12 | TC |
| 9AG              | K          | G   | HM    | H         | H           | NC        | G            | NC               | P            |    |    |    |    |
| 9AJ              | PT2        | GT2 | KT2   | H         | H           | PT1       | GT1          | KT1              | IS           |    |    |    |    |
| 9AK              | G3P        | GT  | PT    | H         | H           | K         | G1P          | G2P              | PP           |    |    |    |    |
| 9AQ              | K          | G1  | K     | H         | H           | IS        | P            | G2               | G3           |    |    |    |    |
| 9AX              | KD3        | PD3 | IS    | H         | H           | PD2       | KD2          | PD1              | KD1          |    |    |    |    |
| 9BD              | NC         | P   | NC    | H         | H           | NC        | P            | NC               | P            |    |    |    | K  |
| 9BF              | K          | G1  | G3,IS | H         | H           | HM        | P            | G2               | G3,IS        |    |    |    |    |
| 9BL              | IC         | G1  | K,G3  | H         | H           | IC        | P            | IC               | G2           |    |    |    |    |
| 9BQ              | P          | NC  | G1    | H         | H           | K,G3      | G1           | G2               | NC           |    |    |    |    |
| 9BV              | K          | G1  | G2    | H         | H           | P         | G3,IS        | G2               | G1           |    |    |    |    |
| 9BX              | G          | K   | G     | G         | P           | G         | H            | H                | G            |    |    |    |    |
| 9CB              | IC         | IC  | IC    | H         | H           | IC        | IC           | IC               | P            |    |    |    | K  |
| 9CF              | PT         | GT  | KT    | H         | H           | PD2       | PD1          | KD1<br>KD2<br>IS | HM           |    |    |    |    |
| 9CK              | G2         | NC  | G1    | H         | H           | G1        | K,G3         | NC               | P            |    |    |    |    |
| 9CV              | IC         | G1  | K,G3  | H         | H           | IC        | P            | IC               | G2           |    |    |    |    |
| 9CY              | KP         | G1P | G2P   | H         | H           | PP        | KD           | PD               | G3P<br>IS    |    |    |    |    |
| 9CZ              | PT2        | KT2 | GT2   | H         | H           | PT1       | KT1          | GT1              | HM           |    |    |    |    |
| 9DA              | PT         | GT  | KT    | H         | H           | PP        | G2P          | G1P              | G3P<br>KP,IS |    |    |    |    |
| 9DC              | PT         | G1P | G2P   | H         | H           | PP        | KP,IS<br>G3P | KT               | GT           |    |    |    |    |
| 9DE              | PT2        | GT2 | KT2   | H         | H           | PT1       | GT1          | KT1              | IS           |    |    |    |    |
| 9DJ              | PD2        | NC  | NC    | H         | H           | NC        | PD1          | NC               | K            |    |    |    |    |
| 9DP              | DJ2        | DJ1 | G3    | HB        | HA,IS<br>G3 | G1        | K            | P2               | P1           |    |    |    |    |
| 9DR              | P          | G   | G     | H         | H           | K         | G            | G                | P            |    |    |    |    |
| 9DS              | G2P        | G1P | KP    | H         | H           | PD        | G3P<br>IS    | KD               | PD           |    |    |    |    |
| 9DT              | H,K<br>IS  | H   | NC    | H,K<br>IS | H           | H,K<br>IS | NC           | H                | H,K<br>IS    |    |    |    | P  |

| Terminal Diagram | PIN NUMBER   |              |                  |   |             |              |                     |              |           |    |    |    |    |
|------------------|--------------|--------------|------------------|---|-------------|--------------|---------------------|--------------|-----------|----|----|----|----|
|                  | 1            | 2            | 3                | 4 | 5           | 6            | 7                   | 8            | 9         | 10 | 11 | 12 | TC |
| 9DW              | GT           | PT           | K                | H | H           | PP           | G2P                 | G3P          | G1P       |    |    |    |    |
| 9DX              | KT           | GT           | PT               | H | H           | G3P<br>KP,IS | G1P                 | G2P          | PP        |    |    |    |    |
| 9DZ              | KT           | GT           | PT               | H | H           | G1P          | G3P<br>KP,IS        | G2P          | PP        |    |    |    |    |
| 9E               | PD3          | PD2          | KD2<br>IS        | H | H           | PD1          | KT,IS<br>KD1<br>KD3 | GT           | PT        |    |    |    |    |
| 9EC              | G3P<br>KT,IS | GT           | PT               | H | H           | G1P          | KP                  | G2B          | PP        |    |    |    |    |
| 9ED              | PP           | G2P          | KP               | H | H,IS<br>G3P | G1P          | KT                  | PT           | GT        |    |    |    |    |
| 9EF              | PT2          | NC           | GT2              | H | H           | PT1          | GT1                 | KT1          | KT2       |    |    |    |    |
| 9EG              | GT           | PT           | KT,IS<br>G3P     | H | H           | PP           | G2P                 | KP           | G1P       |    |    |    |    |
| 9EN              | PD2          | PD1          | KD1<br>KD2<br>IS | H | H           | KT           | GT                  | PT           | HM        |    |    |    |    |
| 9EP              | PT2          | GT2          | KT2              | H | H           | PT1          | GT1                 | KT1          | IC        |    |    |    |    |
| 9EQ              | K            | G1           | K                | H | H           | IC           | P                   | G3           | G2        |    |    |    |    |
| 9ER              | PD2          | KD2          | KD1              | H | H           | PD1          | PT                  | GT           | KT        |    |    |    |    |
| 9ES              | PT2          | NC           | KT1              | H | H           | PT1          | GT1                 | GT2          | KT2       |    |    |    |    |
| 9EU              | G2           | NC           | G1               | H | H           | G1           | K,G3                | G2           | P         |    |    |    |    |
| 9EX              | GT           | KP,IS<br>G3P | G1P              | H | H           | PP           | G2P                 | KT           | PT        |    |    |    |    |
| 9FA              | GT           | PT           | KT               | H | H           | PP           | G2F                 | KP,IS<br>G3P | G1P       |    |    |    |    |
| 9FE              | PD2          | PD1          | KD1<br>KD2       | H | H           | PP           | G2P                 | G1P          | KP<br>G3P |    |    |    |    |
| 9FG              | K            | G2,IS        | PP2              | H | H           | G3P2         | G1                  | PP1          | G3P1      |    |    |    |    |
| 9FH              | PD2          | GP2          | PP               | H | H           | PD1          | K                   | G1P          | G3P       |    |    |    |    |
| 9FJ              | KT           | GT           | PT               | H | H           | PD2          | KD1                 | KD2          | PD1       |    |    |    |    |
| 9FK              | K            | IC           | P                | H | H           | IC           | IC                  | P            | IC        |    |    |    |    |
| 9FN              | G1P          | G3P<br>IS    | KD               | H | H           | PD           | PP                  | G2P          | KP        |    |    |    |    |

| Terminal<br>Dia-<br>gram | PIN NUMBER   |            |              |     |             |     |              |                  |       |    |    |    |    |
|--------------------------|--------------|------------|--------------|-----|-------------|-----|--------------|------------------|-------|----|----|----|----|
|                          | 1            | 2          | 3            | 4   | 5           | 6   | 7            | 8                | 9     | 10 | 11 | 12 | TC |
| 9FT                      | KT           | PP         | G2P          | H   | H,IS<br>G3P | KP  | G1P          | GT               | PT    |    |    |    |    |
| 9FX                      | GT           | PT         | KT           | H   | H           | PTR | G2TR         | KTR<br>IS        | G1TR  |    |    |    |    |
| 9FZ                      | PT           | G1P        | KP,IS<br>G3P | H   | H           | PP  | G2P          | KT               | GT    |    |    |    |    |
| 9G                       | K,G3         | G1         | K,G3         | H   | H           | G2  | P            | K,G3             | G2    |    |    |    |    |
| 9GA                      | GT           | IC         | K            | H   | H           | TA  | RCJ          | IC               | PT    |    |    |    |    |
| 9GC                      | G1TR         | KTR        | G2TR         | H   | H           | PTR | KD1<br>KD2   | PD2              | PD1   |    |    |    |    |
| 9GE                      | PT           | G1TR       | G2TR         | H   | H           | PTR | KTR<br>IS    | KT               | GT    |    |    |    |    |
| 9GF                      | GT           | PT         | K            | H   | H           | PP  | G2P          | G3P,K            | G1P   |    |    |    |    |
| 9GK                      | K            | G1         | G3,IS        | H   | H           | NC  | P            | G2               | G3,IS |    |    |    |    |
| 9GM                      | KT,IS<br>G3P | PP         | G2P          | H   | H           | KP  | G1P          | GT               | PT    |    |    |    |    |
| 9GR                      | G2           | K,G3       | G1           | H   | H           | G1  | K,G3         | IC               | P     |    |    |    |    |
| 9GS                      | PT           | G2TR       | G1TR         | H   | H           | PTR | KTR          | GT               | KT    |    |    |    |    |
| 9H                       | PT2          | GT2        | KT2          | H   | H           | KT1 | GT1          | HM               | PT1   |    |    |    |    |
| 9HE                      | G2P          | G1P        | K,IS         | H   | H           | PP  | PD1          | PD2              | G3P   |    |    |    |    |
| 9HF                      | PT2          | GT2        | GT2          | H   | H           | PT1 | GT1          | KT1              | KT2   |    |    |    |    |
| 9HG                      | G1P          | KD         | PD           | H   | H           | PP  | GP3<br>IS    | G2P              | KP    |    |    |    |    |
| 9HK                      | PD2          | KD1<br>KD2 | PD1          | H   | H           | G1P | KP,IS<br>G3P | G2P              | PP    |    |    |    |    |
| 9HL                      | G1P2         | K,G3       | G1P1         | HP2 | HP1         | PP2 | G2           | PP1              | HM    |    |    |    |    |
| 9HN                      | G2           | NC         | G1           | H   | H           | G1  | K,G3         | IC               | P     |    |    |    |    |
| 9HP                      | IC           | P          | IC           | H   | H           | IC  | P            | IC               | K     |    |    |    |    |
| 9HR                      | PD2          | KTR        | G1TR         | H   | H           | PTR | G2TR         | KD1<br>KD2<br>IS | PD1   |    |    |    |    |
| 9HV                      | G1TR         | K          | G2TR         | H   | H           | PTR | IC           | IC               | PD    |    |    |    |    |
| 9HX                      | GT           | PT         | KT           | H   | H           | PP  | KP,IS<br>G3P | G1P              | G2P   |    |    |    |    |

| Terminal Diagram | PIN NUMBER        |              |      |                 |                |                  |                   |              |      |    |    |    | TC |
|------------------|-------------------|--------------|------|-----------------|----------------|------------------|-------------------|--------------|------|----|----|----|----|
|                  | 1                 | 2            | 3    | 4               | 5              | 6                | 7                 | 8            | 9    | 10 | 11 | 12 |    |
| 9HZ              | G1TR              | K            | G2TR | H               | H              | PD2              | PTR               | KTR          | PD1  |    |    |    |    |
| 9JD              | G1TR              | KTR          | G2TR | H               | H              | PTR              | KT,IS             | PT           | GT   |    |    |    |    |
| 9JE              | GT                | KP,IS<br>G3P | G1P  | H               | H              | PP               | G2P               | KT           | PT   |    |    |    |    |
| 9JF              | PP                | GT           | PT   | H               | H              | KT               | G1P               | KP,IS<br>G3P | G2P  |    |    |    |    |
| 9JG              | K,IS<br>G3P       | GT           | PT   | H               | H              | K,IS<br>G3P      | G1P               | G2P          | PP   |    |    |    |    |
| 9JT              | PT                | PP           | G2P  | H               | H              | KP,IS<br>G3P     | G1P               | KT           | GT   |    |    |    |    |
| 9JU              | PD2               | NC           | G1TR | H               | H              | PTR              | G2TR              | K            | PD1  |    |    |    |    |
| 9K               | P                 | NC           | G3   | H               | H              | G2               | K                 | G1           | G1   |    |    |    |    |
| 9KA              | KT3               | GT3          | PT3  | H<br>KT1<br>KT2 | H              | PT2              | GT2               | PT1          | GT1  |    |    |    |    |
| 9JX              | G1TR              | K            | G2TR | H               | H              | PTR              | PD2               | IC           | PD1  |    |    |    |    |
| 9KP              | P1BTR             | GT           | PT   | H,K             | H              | G1TR             | G2TR              | P1ATR        | P2TR |    |    |    |    |
| 9KR              | KD2               | PD1          | KD1  | H               | H              | PD2              | KT                | GT           | PT   |    |    |    |    |
| 9KS              | K,IS              | G2           | G1   | H               | H              | PB               | PA                | DJB          | DJA  |    |    |    |    |
| 9KT              | 2PB               | 2G           | 2PA  | H               | H              | 1PB              | 1G                | 1PA          | K    |    |    |    |    |
| 9KU              | GT                | KT           | G1P  | H               | H,G3P<br>KP,IS | G2P              | PP                | PD           | PT   |    |    |    |    |
| 9KV              | G2<br>G4HP        | G1HP         | PHP  | H               | H<br>KT        | GT               | G5HP<br>KHP<br>IS | PT           | G3HP |    |    |    |    |
| 9LG              | PT2               | IC           | GT2  | H               | H              | PT1              | GT1               | KT1          | KT2  |    |    |    |    |
| 9LK              | K                 | G1           | G2   | H               | H              | P                | G3                | G2           | K    |    |    |    |    |
| 9LP              | PT2               | GT2          | KT2  | H               | H              | PT1              | GT1               | KT           | NC   |    |    |    |    |
| 9LQ              | G3P               | G1P          | K    | H               | H              | G2P              | PP                | PD           | IS   |    |    |    |    |
| 9LS              | H                 | H            | NC   | KT2             | GT2            | PT2              | PT1               | GT1          | KT1  |    |    |    |    |
| 9LT              | KD1<br>KD2<br>ISD | PD2          | PD1  | H               | H              | KP<br>G3P<br>ISP | G1P               | G2P          | PP   |    |    |    |    |
| 9LW              | K<br>IS           | G2           | PP2  | H               | H              | G3P2             | G1                | PP1          | G3P1 |    |    |    |    |

| Terminal Diagram | PIN NUMBER  |            |             |              |     |      |              |            |       |    |    |    |    |
|------------------|-------------|------------|-------------|--------------|-----|------|--------------|------------|-------|----|----|----|----|
|                  | 1           | 2          | 3           | 4            | 5   | 6    | 7            | 8          | 9     | 10 | 11 | 12 | TC |
| 9LY              | PT          | GT         | KT          | H            | H   | PP   | G2           | KP<br>G3P  | G1P   |    |    |    |    |
| 9LZ              | GT          | KT         | G2P         | H            | H   | PP   | KP,IS<br>G3P | G1P        | PT    |    |    |    |    |
| 9M               | PD1         | NC         | K           | H            | H   | NC   | PD2          | NC         | NC    |    |    |    |    |
| 9MB              | GT3         | PT3        | GT2         | H,GT1<br>KT3 | H   | PT1  | KT1          | KT2        | PT2   |    |    |    |    |
| 9MP              | KP          | G1P        | KT,IS       | H            | H   | GT   | PT           | PP         | G2P   |    |    |    |    |
| 9MQ              | G2          | IC         | IC          | H            | H   | G1   | K,G3         | IC         | P     |    |    |    |    |
| 9MR              | PBTR        | NC         | PD          | H            | H   | K,IS | G1TR         | G2TR       | PATR  |    |    |    |    |
| 9NH              | G1          | G1         | G3,K        | H            | H   | G2   | G2           | G3,K       | IC    |    |    |    | P  |
| 9NJ              | G1P1        | G2P1       | PP1         | H            | H   | G1P2 | K,IS<br>G3   | PP2        | G2P2  |    |    |    |    |
| 9NW              | K           | G1         | G3          | H            | H   | G2   | P            | G2         | G3    |    |    |    |    |
| 9NY              | G           | K          | G           | H            | H   | G    | G            | P          | G     |    |    |    |    |
| 9NZ              | G2          | G1         | K,G3        | H            | H   | G1   | G2           | IC         | P     |    |    |    |    |
| 9PA              | K,IS<br>G3P | G1P        | G2P         | H            | H   | PP   | K,IS<br>G3P  | GT         | PT    |    |    |    |    |
| 9PB              | F—          | G1         | G2          | LC           | LC  | P    | G3           | G2         | F+    |    |    |    |    |
| 9PG              | H           | H          | IC          | KT2          | GT2 | PT2  | PT1          | GT1        | KT1   |    |    |    |    |
| 9PL              | P           | K,G3       | G2          | H            | H   | K,G3 | G1           | G2         | K,G3  |    |    |    |    |
| 9PM              | K           | G1         | K           | H            | H   | NC   | P            | G2         | G3,IS |    |    |    |    |
| 9PQ              | PD4         | PD3<br>KD4 | KD3         | H            | H   | IS   | PD2          | PD1<br>KD2 | KD1   |    |    |    |    |
| 9PV              | PT          | GT         | K,IS        | H            | H   | G1P  | G3P          | G2P        | PP    |    |    |    |    |
| 9PX              | G2          | NC         | IC          | H            | H   | G1   | K,G3         | IC         | P     |    |    |    |    |
| 9QA              | K,IS<br>G3P | G1P        | K,IS<br>G3P | H            | H   | PP   | G2P          | PT         | GT    |    |    |    |    |
| 9QD              | KT1         | GT2        | KT2         | H            | H   | PT2  | NC           | PT1        | GT1   |    |    |    |    |
| 9QG              | P1BTR       | P1ATR      | PD          | H            | H   | K,IS | G1TR         | G2TR       | P2TR  |    |    |    |    |
| 9QJ              | FB          | FA         | FA          | LC           | PD2 | PD2  | LC           | PD1        | PD1   |    |    |    |    |
| 9QK              | G2          | G1         | K,G3        | H            | H   | G1   | G2           | IC         | IC    |    |    |    | P  |



| Terminal Diagram | PIN NUMBER   |       |              |            |             |           |       |      |           |            |    |    |    |
|------------------|--------------|-------|--------------|------------|-------------|-----------|-------|------|-----------|------------|----|----|----|
|                  | 1            | 2     | 3            | 4          | 5           | 6         | 7     | 8    | 9         | 10         | 11 | 12 | TC |
| 9QL              | G2           | G1    | K            | H          | H           | G1        | G2    | G3   | IC        |            |    |    | P  |
| 9QM              | KD3          | PD3   | IC           | H          | H           | PD2       | KD2   | PD1  | KD1       |            |    |    |    |
| 9QP              | KT           | GT    | PT           | H          | H,IS<br>G3P | KP        | G1P   | G2P  | PP        |            |    |    |    |
| 9QT              | KT           | G1B   | KB<br>G3B    | H          | H           | PB        | G2B   | PT   | GT        |            |    |    |    |
| 9QU              | G2           | G1    | K            | H          | H           | G3        | G2    | IC   | P         |            |    |    |    |
| 9QY              | PT           | GT    | KT,IS<br>G3P | H          | H           | G1P       | KP    | GP2  | PP        |            |    |    |    |
| 9QZ              | PP2          | G3P2  | K            | H          | H           | PP1       | G3P1  | G2   | G1        |            |    |    |    |
| 9RA              | P            | IC    | G2           | H          | H           | G3,PD     | G1    | G1   | K         |            |    |    |    |
| 9RF              | K            | G1    | NC           | H          | H           | G3        | P     | NC   | G2        |            |    |    |    |
| 9RG              | F,IS         | IC    | IC           | IC         | F           | IC        | NC    | IC   | IC        |            |    |    | P  |
| 9RJ              | G1           | G3    | G2           | H          | H           | G2        | G3    | G1   | K         |            |    |    | P  |
| 9RL              | KP,IS<br>G3P | G2P   | PP           | H          | H           | PD2       | KD    | PD1  | G1P       |            |    |    |    |
| 9RQ              | PT3          | PT2   | PT1          | H          | H           | GT1       | K     | GT2  | GT3       |            |    |    |    |
| 9RT              | H,K<br>IS    | H     | IC           | H,K<br>IS  | H           | H,K<br>IS | IC    | H    | H,K<br>IS |            |    |    | P  |
| 9RU              | DJ2          | DJ1   | G3           | HB         | HA,IS       | G1        | K,G2  | P2   | P1        |            |    |    |    |
| 9RX              | IC           | P     | IC           | H          | H           | P         | IC    | IC   | K         |            |    |    |    |
| 9SB              | G1           | K,G3  | K,G3         | H          | H           | G2        | G1    | IC   | P         |            |    |    |    |
| 9SG              | HI           | P     | IC           | H          | H           | IC        | P     | IC   | NC        |            |    |    | K  |
| 9U               | P            | IC    | IC           | F          | F           | IC        | IC    | IC   | P         |            |    |    |    |
| 9V               | P            | NC    | H            | G          | G           | K         | G     | G    | H         |            |    |    |    |
| 9X               | G1           | NC    | H            | K,IS<br>G3 | NC          | P         | NC    | G2   | H         |            |    |    |    |
| 9Y               | F,IS         | F     | LC           | F,IS       | F           | F,IS      | LC    | F    | F,IS      |            |    |    | P  |
| 10F              | G1TR2        | G2TR2 | PTR2         | H          | H           | KTR1      | G1TR1 | PTR1 | KTR2      | KD1<br>IS  |    |    |    |
| 10G              | PT3          | GP3   | KT3          | H          | H           | PT2       | GT1   | PT1  | GT2       | KT1<br>KT2 |    |    |    |

| Terminal Diagram | PIN NUMBER |             |       |            |      |           |                   |       |              |              |           | TC |    |
|------------------|------------|-------------|-------|------------|------|-----------|-------------------|-------|--------------|--------------|-----------|----|----|
|                  | 1          | 2           | 3     | 4          | 5    | 6         | 7                 | 8     | 9            | 10           | 11        |    | 12 |
| 10H              | G1P        | G2P         | PP    | H          | H    | GP3<br>IS | KT                | GT    | PT           | KP           |           |    |    |
| 10K              | KT         | KP          | G1P   | G3P<br>IS  | H    | H         | PP                | G2P   | PT           | GT           |           |    |    |
| 10L              | G1P2       | KP2<br>G3P2 | G2P2  | PP2        | H    | H         | KP1<br>G3P1<br>IS | G1P1  | G2P1         | PP1          |           |    |    |
| 12AQ             | P          |             | G     |            |      |           |                   | K     |              | H            |           | H  |    |
| 12AS             |            | G2          |       | G1         |      |           |                   | K     |              | H            |           | H  | P  |
| 12BF             | H          | KT2         | GT2   | PT2        | GT1  | PT1       | KT1               | PD2   | KD1<br>KD2   | PD1          | IS        | H  |    |
| 12BJ             | H          | G2          | G1    | K,G3       | IC   | IC        | P                 | IC    | IC           | K            | G1        | H  |    |
| 12BL             | H          | NC          | NC    | P          | NC   | NC        | K                 | NC    | NC           | P            | NC        | H  |    |
| 12BM             | H          | NC          | GT2   | NC         | PT2  | IC        | KT2               | NC    | KT1          | GT1          | PT1       | H  |    |
| 12BQ             | H          | PT3         | KT3   | KT1        | PT2  | KT2       | GT2               | IC    | GT1          | PT1          | GT3       | H  |    |
| 12BT             | H          | G2P         | K,G3P | PB         | G3B  | G2B       | G1B               | KB,IS | PP           | NC           | G1P       | H  |    |
| 12BU             | H          | KP          | G1P   | G3P        | IS   | PP        | G2P               | G1B   | KB<br>G3B    | G2B          | PB        | H  |    |
| 12BW             | H          | G2P2        | PP2   | G3P2<br>IS | G1P2 | KP2       | G2P1              | KP1   | PP1          | G3P1<br>IS   | G1P1      | H  |    |
| 12BY             | H          | PT3         | KT3   | KT1        | PT2  | KT2       | GT2               | IS    | GT1          | PT1          | KT3       | H  |    |
| 12CA             | H          | G1P         | G2P   | KT2        | GT2  | PT2       | PT1               | GT1   | KT1          | KP,IS<br>G3P | PP        | H  |    |
| 12CT             |            | K           |       | K          |      |           |                   | K     |              | H            | SHEL<br>G | H  | P  |
| 12DA             | H          | KD2         | PD2   | KT2        | GT2  | PT2       | PT1               | GT1   | KT1          | PD1          | KD1       | H  |    |
| 12DG             | H,K<br>IS  | IC          | IC    | LC         | LC   | IC        | IC                | IC    | IC           | LC           | IC        | H  | P  |
| 12DM             | H          | PP2         | G2P2  | G3P2       | G1P2 | KP2       | G3P1<br>IS        | PP1   | G2P1         | G1P1         | KP1       | H  |    |
| 12DP             | H          | PP          | GT2   | PT2        | KT1  | GT1       | KT2<br>IS         | PT1   | KP,IS<br>G3P | G2P          | G1P       | H  |    |
| 12DQ             | F,IS       | IC          | IC    | LC         | IC   | IC        | IC                | IC    | IC           | LC           | IC        | F  | P  |
| 12DR             | H          | NC          | G2    | K,G3       | G1   | NC        | G2                | NC    | G1           | K,G3         | G2        | H  | P  |


| Terminal<br>Diagram | PIN NUMBER |           |      |           |           |      |            |           |      |              |    |    | TC |
|---------------------|------------|-----------|------|-----------|-----------|------|------------|-----------|------|--------------|----|----|----|
|                     | 1          | 2         | 3    | 4         | 5         | 6    | 7          | 8         | 9    | 10           | 11 | 12 |    |
| 12DZ H              | PT         | NC        | PB   | NC        | G1B       | G1B  | G2B        | KB<br>G3B | GT   | KT           | H  |    |    |
| 12EA P              | P          |           | G    |           | G         | K    |            |           | H    |              | H  |    |    |
| 12EJ H              | NC         | GT2       | NC   | PT2       | IC        | KT2  | GT2        | KT1       | GT1  | PT1          | H  |    |    |
| 12EO H              | NC         | GT2       | NC   | PT2       | NC        | KT2  | IC         | KT1       | GT1  | PT1          | H  |    |    |
| 12ER H              | PP2        | G2P<br>IS | G1P  | G3P2      | PP1       | G3P1 | K<br>IS    | GT        | KT   | PT           | H  |    |    |
| 12ES H              | NC         | G1        | K,G3 | G2        | IC        | P    | IC         | G2        | K,G3 | G1           | H  |    |    |
| 12EW H,K<br>IS      | H,K<br>IS  | IC        | LC   | IC        | H,K<br>IS | LC   | IC         | H,K<br>IS | LC   | IC           | H  |    | P  |
| 12EY H              | G1         | G2        | K,G3 | NC        | P         | NC   | NC         | G1        | G2   | K,G3         | H  |    |    |
| 12EZ H              | KP<br>IS   | G1P       | NC   | G3P       | G2P       | PP   | G1B        | G3B<br>KB | G2B  | PB           | H  |    |    |
| 12FA H              | IC         | IC        | IC   | K,IS      | G         | NC   | IC         | IC        | IC   | IC           | H  |    | P  |
| 12FB H              | NC         | G2        | K,G3 | G1        | G2        | NC   | G2         | G1        | K,G3 | G2           | H  |    | P  |
| 12FC H              | PD         | NC        | KD   | PP        | NC        | IC   | KP<br>G3P  | G1P       | G2P  | G1P          | H  |    |    |
| 12FE H              | PT3        | KT3       | KT1  | PT2       | KT2       | GT2  | NC         | GT1       | PT1  | GT3          | H  |    |    |
| 12FJ H              | K          | G2        | G3   | G1        | NC        | NC   | IC         | NC        | G3   | NC           | H  |    | P  |
| 12FK H              | K          | G2        | G3   | NC        | NC        | P    | NC         | NC        | G3   | G1           | H  |    |    |
| 12FL H              | K          | G1        | G3   | G2        | IC        | P    | IC         | G2        | G3   | G1           | H  |    |    |
| 12FM H              | PT         | NC        | GT   | KT        | IS        | NC   | G1P        | KP<br>G3P | G2P  | PP           | H  |    |    |
| 12FN H              | PP         | NC        | KD   | PB        | NC        | IC   | KB<br>G3B  | G1B       | G1B  | G2B          | H  |    |    |
| 12FP H              | KT2        | PT2       | GT2  | KT1<br>IS | GT1       | PT1  | G1P        | G2P       | PP   | KP,IS<br>G3P | H  |    |    |
| 12FQ H              | PT2        | KT2       | KT1  | IC        | NC        | NC   | IS         | GT1       | PT1  | GT2          | H  |    |    |
| 12FR H              | PT2        | KT2       | KT1  | NC        | NC        | PT1  | NC         | GT1       | PT1  | GT2          | H  |    |    |
| 12FS H              | PD         | NC        | KD   | PP        | NC        | IC   | KP<br>G3P  | G1P       | IC   | G2P          | H  |    |    |
| 12FU H              | PP2        | G2P2      | G3P2 | KP2       | G1P2      | PP1  | G3P1<br>IS | G2P1      | KP1  | G1P1         | H  |    |    |
| 12FV H,K<br>IS      | H,K<br>IS  | IC        | NC   | H,K<br>IS | H,K<br>IS | NC   | H          | K         | NC   | IC           | H  |    | P  |

| Terminal<br>Diagram | PIN NUMBER |      |              |           |                  |            |              |           |            |      |    |    |    |
|---------------------|------------|------|--------------|-----------|------------------|------------|--------------|-----------|------------|------|----|----|----|
|                     | 1          | 2    | 3            | 4         | 5                | 6          | 7            | 8         | 9          | 10   | 11 | 12 | TC |
| 12FX H              | NC         | NC   | P            | IC        | IC               | K          | IC           | IC        | P          | NC   | H  |    |    |
| 12FY H              | K          | G2   | G3           | G1        | NC               | IC         | NC           | IC        | G3         | G2   | H  | P  |    |
| 12GA H              | NC         | NC   | P            | IC        | NC               | K          | NC           | IC        | P          | NC   | H  |    |    |
| 12GC H              | PP         | GT2  | KT2          | GT1       | KT1              | PT1        | KP,IS<br>G3P | PT2       | G2P        | G1P  | H  |    |    |
| 12GD H              | K          | G2   | G3           | G1        | NC               | NC         | NC           | IC        | G3         | IC   | H  | P  |    |
| 12GF H              | KP2        | G1P2 | G2P2         | PP2       | G3P2<br>IS       | G1P1       | KP1          | G2P1      | G3P1<br>IS | PP1  | H  |    |    |
| 12GH H              | NC         | G2   | G3           | G1        | NC               | IC         | NC           | IC        | K          | IC   | H  | P  |    |
| 12GJ H              | K          | G2   | G3           | G1        | NC               | IC         | NC           | IC        | G3         | IC   | H  | P  |    |
| 12GK H              | IC         | IC   | P            | IC        | IC               | K          | IC           | IC        | P          | IC   | H  |    |    |
| 12GL H              | G1P        | G2P  | KP,IS<br>G3P | KT2<br>IS | PT2              | KT1        | GT2          | PT1       | GT1        | PP   | H  |    |    |
| 12GS H              | PP         | GT2  | KT2          | GT1       | KT1<br>G3P<br>IS | PT1        | KP           | PT2       | G2P        | G1P  | H  |    |    |
| 12GU H              | NC         | G2   | G3           | G1        | NC               | IC         | NC           | IC        | K          | IC   | H  | P  |    |
| 12GV H              | IC         | IC   | NC           | IC        | H                | IC         | IC           | IC        | NC         | IC   | H  | P  |    |
| 12GW H              | K          | G2   | G3           | G1        | NC               | IC         | NC           | G1        | G3         | G2   | H  | P  |    |
| 12GY H              | G          | BP   | K            | IC        | IC               | P          | IC           | IC        | BP         | G    | H  |    |    |
| 12GZ H              | PT2        | GT2  | NC           | PP        | IC               | K,G3P      | G1P          | G2P       | GT1        | PT1  | H  |    |    |
| 12HA H,K<br>IS      | H,K<br>IS  | IC   | NC           | H,K<br>IS | H,K<br>IS        | NC         | IC           | H,K<br>IS | NC         | IC   | H  | P  |    |
| 12HB H              | G3P2       | PP2  | G2P2         | KP2       | G1P2             | G1P1       | KP1          | G2P1      | PP1        | G3P1 | H  |    |    |
| 12HC H              | IC         | IC   | IC           | K         | G                | IC         | IC           | IS        | IC         | IC   | H  | P  |    |
| 12HD H              | KP2        | G1P2 | G2P2         | PP2       | G3P2<br>IS       | G3P1<br>IS | PP1          | G2P1      | KP1        | G1P1 | H  |    |    |
| 12HE H              | PP         | NC   | G3P          | GT        | KT               | PT         | IS           | KP        | G2P        | G1P  | H  |    |    |
| 12HF H              | IC         | NC   | P            | IC        | IC               | K          | IC           | IC        | P          | NC   | H  |    |    |
| 12HG H              | PT3        | K    | PT2          | NC        | PT1              | NC         | GT1          | NC        | GT2        | GT3  | H  |    |    |
| 12HJ H              | GT         | PT   | KT           | G1P       | G1P              | KP         | G2P          | G3P<br>IS | NC         | PP   | H  |    |    |
| 12HK F,IS           | F,IS       | IC   | NC           | F,IS      | F,IS             | NC         | F            | F,IS      | NC         | IC   | F  | P  |    |


| Terminal Diagram | PIN NUMBER |             |      |           |           |                  |           |           |      |     |    |    | TC |
|------------------|------------|-------------|------|-----------|-----------|------------------|-----------|-----------|------|-----|----|----|----|
|                  | 1          | 2           | 3    | 4         | 5         | 6                | 7         | 8         | 9    | 10  | 11 | 12 |    |
| 12HL H           | IC         | IC          | K,G3 | G1        | NC        | IC               | NC        | IC        | K,G3 | G2  | H  | P  |    |
| 12HN H           | PT2        | GT2         | PT1  | KT1       | GT1       | KT2<br>G3P       | G1P       | KP        | G2P  | PP  | H  |    |    |
| 12HR H           | PT2        | GT2         | PP   | G2P       | IC        | KT2<br>KP<br>G3P | G1P       | PT1       | KT1  | GT1 | H  |    |    |
| 12HT H           | PD         | NC          | KD   | PP        | NC        | IC               | KP<br>G3P | G1P       | NC   | G2P | H  |    |    |
| 12HU H           | PT3        | K           | PT2  | NC        | PT1       | IC               | GT1       | IC        | GT2  | GT3 | H  |    |    |
| 12HWH            | PT2        | PP          | G2P  | G1P       | G1P<br>KP | KT2              | KT1       | GT1       | PT1  | GT2 | H  |    |    |
| 12HX H           | IC         | NC          | P    | IC        | IC        | IC               | IC        | IC        | P    | NC  | H  | K  |    |
| 12HY H,K<br>IS   | H,K<br>IS  | IC          | NC   | H,K<br>IS | IC        | IC               | H         | H,K<br>IS | NC   | IC  | H  | P  |    |
| 12JA H           | K          | G2          | G3   | G1        | NC        | H                | NC        | G2        | G3   | G2  | H  | P  |    |
| 12JB H,K<br>IS   | H,K<br>IS  | IC          | NC   | H,K<br>IS | IC        | H,K<br>IS        | H         | H,K<br>IS | NC   | NC  | H  | P  |    |
| 12JF H           | K          | G2          | G3   | G1        | NC        | NC               | NC        | IC        | G3   | G2  | H  | P  |    |
| 1AY2 F           | F          |             |      |           |           |                  |           |           |      |     |    | P  |    |
| 6EC4 IC          | P          | HI          | H    | H         | IC        | P                | P         | IC        |      |     |    | K  |    |
| 17— G1<br>BH25   | G1         | G3          | H    | H         | G2        | G2               | G3        | K         |      |     |    | P  |    |
| 487A HT2         | KT2        | GT2         | PT2  | HM,IS     | PT1       | GT1              | KT1       | HT1       |      |     |    |    |    |
| 991* K           | P          |             |      |           |           |                  |           |           |      |     |    |    |    |
| 991* P<br>F      | K<br>F     | OR          |      |           |           |                  |           |           |      |     |    | P  |    |
| 5672 P           | G2         | F+          | G1   | F-,G3     |           |                  |           |           |      |     |    |    |    |
| 5678 P           | G2         | F-,IS<br>G3 | G1   | F+<br>G3  |           |                  |           |           |      |     |    |    |    |
| 5734             |            |             | H    | G         | H         | K,IS             | SHELL     | P         |      |     |    |    |    |
| 5783*K           |            | P           |      | K         |           |                  |           |           |      |     |    |    |    |
| 6360 G1TR1<br>IS | K<br>IS    | G1TR2       | HTR1 | HTR2      | PTR1      | G2TR1<br>G2TR2   | PTR2      | HM        |      |     |    |    |    |
| 6977 F           | P          | G           | F    |           |           |                  |           |           |      |     |    |    |    |
| 8888 K           | K          |             | K    |           | K         | SHELL            | G         |           | H    |     | H  | P  |    |

# Outlines


## METAL TYPES



-1-




-2-



-3-


|    | Y     | X       |
|----|-------|---------|
| 2A | 2-5/8 | 2-1/16  |
| 2B | 3-1/4 | 2-11/16 |



-1A-


|     | X     | Y     | Z    |
|-----|-------|-------|------|
| 1A1 | 1.050 | 0.840 | .255 |
| 1A2 | 0.985 | 0.780 | .255 |
| 1A3 | 0.985 | 0.780 | .317 |

## GLASS TYPES



-5-

|    | X     | Y     | Z            |
|----|-------|-------|--------------|
| 5A | 1-5/8 | 1-3/8 | 1 ± 3/32     |
| 5B | 1-3/4 | 1-1/2 | 1-1/8 ± 3/32 |
| 5C | 2-1/8 | 1-7/8 | 1-1/2 ± 3/32 |
| 5D | 2-5/8 | 2-3/8 | 2 ± 3/32     |
| 5E | 2-3/8 | 2-1/8 | 1-3/4 ± 3/32 |




-6-

|    | X       | Y       |
|----|---------|---------|
| 6A | 1-3/4   | 1-1/2   |
| 6B | 2-3/16  | 1-15/16 |
| 6C | 2-13/32 | 2-5/32  |
| 6D | 2-7/16  | 2-13/16 |
| 6E | 2-5/8   | 2-3/8   |
| 6F | 2-3/4   | 2-1/2   |
| 6G | 3-1/16  | 2-13/16 |
| 6H | 3-1/8   | 2-7/8   |
| 6J | 2       | 1-3/4   |
| 6K | 2-7/16  | 2-3/16  |
| 6L | 2-7/8   | 2-5/8   |
| 6M | 1-31/32 | 1-23/32 |
| 6N | 2-27/32 | 2-19/32 |


  

|    | Z              |
|----|----------------|
| 6A | 1-1/8 ± 3/32   |
| 6B | 1-9/16 ± 3/32  |
| 6C | 1-25/32 ± 3/32 |
| 6D | 1-13/16 ± 3/32 |
| 6E | 2 ± 3/32       |
| 6F | 2-1/8 ± 3/32   |
| 6G | 2-7/16 ± 3/32  |
| 6H | 2-1/2 ± 3/32   |
| 6K | 1-29/32        |

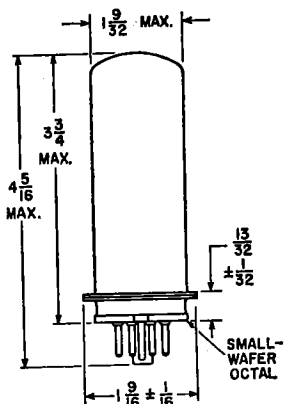


-4-


All measurements in inches.




|    | X       | Y                |
|----|---------|------------------|
| 7A | 2-27/32 | 2-7/16 $\pm$ 1/8 |
| 7B | 3-1/16  | 2-15/32 MAX.     |
| 7C | 3-9/32  | 2-7/8 $\pm$ 1/8  |
| 7D | 3-1/2   | 3-1/4 MAX.       |
| 7E | 2-17/32 | 2-1/8 $\pm$ 1/8  |
| 7F | 2-29/32 | 2-5/8 MAX.       |
| 7G | 2-23/32 | 2-1/8 $\pm$ 1/8  |
| 7H | 3-3/16  | 2-15/16          |




|    | X     | Y           |
|----|-------|-------------|
| 8A | 1.875 | 1.250-1.500 |
| 8B | 2.375 | 1.750-2.000 |
| 8C | 2.625 | 2.000-2.250 |
| 8D | 2.875 | 2.250-2.500 |
| 8E | 3.050 | 2.770 MAX.  |
| 8F | 3.125 | 2.500-2.750 |
| 8G | 3.375 | 2.750-3.000 |

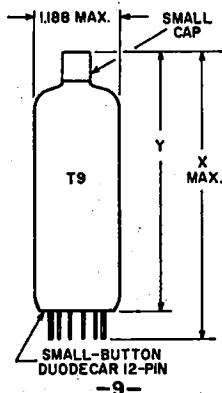


|    | X     | Y           |
|----|-------|-------------|
| 9A | 3.375 | 2.750-3.000 |
| 9B | 3.625 | 3.000-3.250 |
| 9C | 4.110 | 3.766 MAX.  |
| 9D | 3.875 | 3.250-3.500 |




|     | X     | Y     | Z           |
|-----|-------|-------|-------------|
| 10A | 2.630 | 2.320 | 1.770-2.010 |
| 10B | 2.900 | 2.620 | 2.070-2.310 |
| 10C | 2.930 | 2.620 | 2.070-2.310 |
| 10D | 3.230 | 2.920 | 2.370-2.610 |
| 10E | 4.125 | 3.750 |             |
| 10F | 3.110 | 2.730 |             |
| 10G | 3.080 | 2.770 |             |
| 10F | 3.511 | 3.169 | 2.68        |

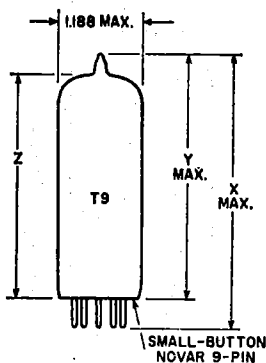

|     | X     | Y     | Z           |
|-----|-------|-------|-------------|
| 11A | 3.000 | 2.620 | 2.100-2.280 |
| 11B | 3.080 | 2.700 | 2.050-2.230 |
| 11C | 3.110 | 2.730 | 2.210-2.390 |
| 11D | 3.410 | 3.010 | 2.510-2.690 |
| 11E | 2.960 | 2.580 | 2.060-2.240 |




|     | X       | Y     |
|-----|---------|-------|
| 12A | 2-9/32  | 1-3/4 |
| 12B | 2-25/32 | 2-1/4 |
| 12C | 3-5/32  | 2-5/8 |




-13-

|     | X       | Y       | Z      |
|-----|---------|---------|--------|
| 13A | 2-7/8   | 2-5/16  | 1-9/32 |
| 13B | 3       | 2-7/16  | 1-9/32 |
| 13C | 3-1/16  | 2-1/2   | 1-9/32 |
| 13D | 3-5/16  | 2-3/4   | 1-5/16 |
| 13E | 3-3/8   | 2-13/16 | 1-9/32 |
| 13F | 3-7/16  | 2-7/8   | 1-9/32 |
| 13G | 3-13/16 | 3-1/4   | 1-9/32 |
| 13H | 4-3/16  | 3-9/16  | 1-3/16 |




-14-

|     | X       | Y      | Z      |
|-----|---------|--------|--------|
| 14A | 3-5/16  | 2-3/4  | 1-5/16 |
| 14B | 3-9/16  | 3      | 1-9/32 |
| 14C | 3-5/8   | 3-1/16 | 1-9/32 |
| 14D | 3-7/8   | 3-5/16 | 1-9/32 |
| 14E | 4-1/16  | 3-1/2  | 1-9/32 |
| 14F | 3-13/16 | 3-1/4  | 1-9/32 |
| 14G | 3-13/16 | 3-1/4  | 1-3/8  |
| 14H | 3-13/16 | 3-1/4  | 1-1/4  |
| 14J | 3-9/16  | 3      | 1-1/4  |
| 14K | 4-5/16  | 3-3/4  | —      |
| 14L | 4-21/64 | 3-3/4  | 1-9/32 |




-15-

|     | X     | Y           |
|-----|-------|-------------|
| 15A | 2.875 | 2.250-2.500 |
| 15B | 3.375 | 3.000 MAX.  |
| 15C | 3.625 | 3.000-3.250 |
| 15D | 3.125 | 2.750       |
| 15E | 3.875 | 3.250-3.500 |
| 15F | 4.250 | 3.625-3.875 |

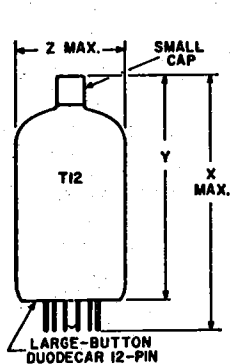


-16-

|     | X     | Y           | Z     |
|-----|-------|-------------|-------|
| 16A | 3.625 | 3.000-3.250 | 1.563 |
| 16B | 4.125 | 3.500-3.750 | 1.563 |
| 16C | 4.875 | 4.250-4.500 | 1.563 |
| 16D | 4.375 | 4.000 MIN.  | 1.563 |
| 16E | 4.375 | 3.750-4.000 | 1.563 |
| 16F | 4.95  | 4.57 MAX.   | 1.563 |
| 16G | 4.625 | 4.000-4.250 | 1.563 |
| 16H | 4.75  | 4.125-4.375 | 1.563 |



-17-

|     | X     | Y     | Z           |
|-----|-------|-------|-------------|
| 17A | 3.180 | 2.800 | 2.280-2.460 |
| 17B | 3.410 | 3.030 | 2.510-2.690 |
| 17C | 4.160 | 3.780 | 3.260-3.440 |
| 17D | 3.550 | 3.170 | —           |
| 17E | 3.710 | 3.330 | 2.810-2.900 |




-18-


|     | X     | Y           |
|-----|-------|-------------|
| 18A | 3.55  | 3.04 ± 0.13 |
| 18B | 4.60  | 4.09 ± 0.13 |
| 18C | 4.38  | 3.75-4.00   |
| 18D | 4.625 | 4.25        |

All measurements in inches.



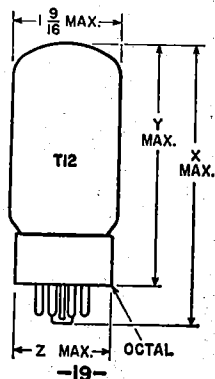


|     | X      | Y       | Z       |
|-----|--------|---------|---------|
| 19A | 3-9/16 | 3       | 1-9/32  |
| 19B | 3-7/8  | 3.5/16  | 1-13/32 |
| 19C | 4      | 3-7/16  | 1-13/32 |
| 19D | 4-1/4  | 3-11/16 | 1-3/8   |
| 19E | 4-5/8  | 4-1/16  | 1-3/8   |
| 19F | 4-5/8  | 4-1/16  | 1-5/8   |
| 19G | 4-3/4  | 4-3/16  | 1-11/16 |
| 19H | 5-3/16 | 4-5/8   | 1-3/8   |
| 19J | 4-1/2  | 3-7/8   | —       |

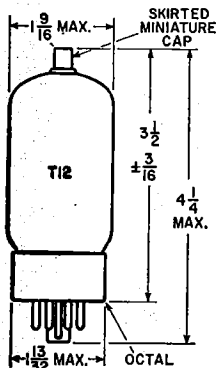




-20-

|     | X     | Y       | Z       |
|-----|-------|---------|---------|
| 20A | 4-1/4 | 3-11/16 | 1-13/32 |
| 20B | 5     | 4-7/16  | 1-3/8   |

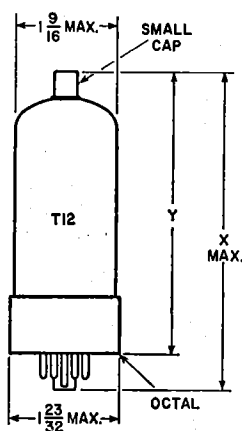




-21-

|     | X      | Y        |
|-----|--------|----------|
| 21A | 4-3/4  | 4 ± 3/16 |
| 21B | 5      | 4-7/16   |
| 21C | 5-7/32 | 4-1/4    |
| 21D | 5      | 4-1/4    |

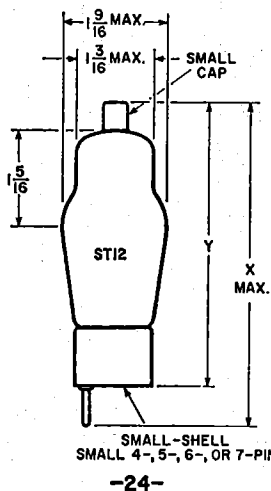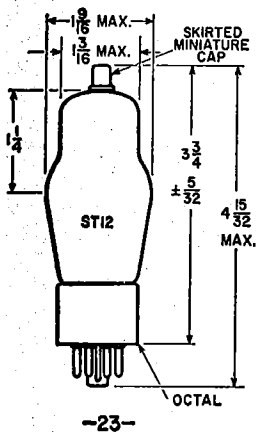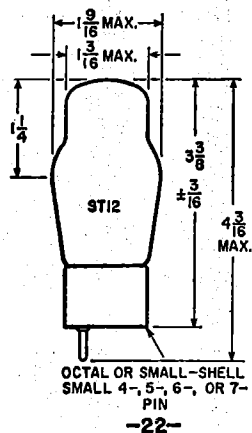


-24-

|     | X       | Y             |
|-----|---------|---------------|
| 24A | 4-15/16 | 4-3/16 ± 1/8  |
| 24B | 4-17/32 | 3.25/32 ± 1/8 |

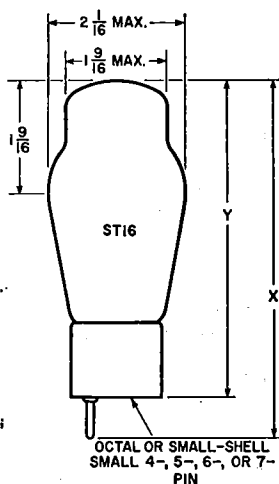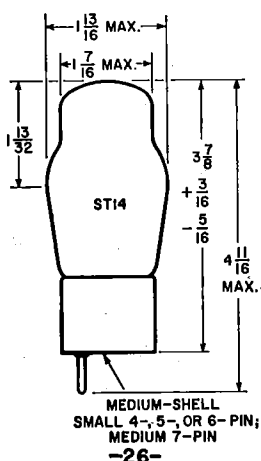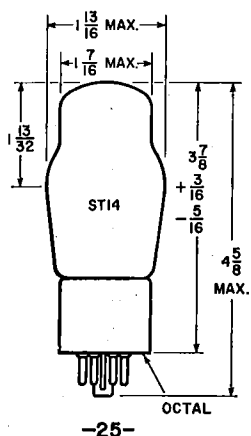


|     | X     | Y             |
|-----|-------|---------------|
| 27A | 5-1/8 | 4-3/8 ± 3/16  |
| 27B | 5-3/8 | 4-9/16 ± 3/16 |

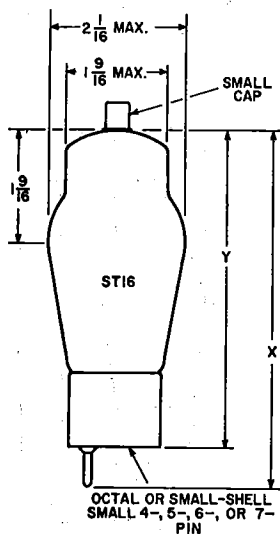

|     | X       | Y              |
|-----|---------|----------------|
| 28A | 5-1/8   | 4-7/16 ± 5/32  |
| 28B | 5-11/16 | 4-31/32 ± 5/32 |


|     | MAX. LENGTH | MAX. DIAMETER |
|-----|-------------|---------------|
| 29A | 1-3/4       | 0.4           |
| 29B | 1-3/4       | 1-5/16        |
| 29C | 2-5/16      | 1-5/16        |
| 29D | 2-5/8       | 1-1/16        |
| 29E | 2-7/8       | 1-5/16        |
| 29F | 3           | 1-5/16        |
| 29G | 3-7/16      | 1-15/16       |
| 29H | 4           | 1-3/16        |
| 29J | 4-7/8       | 1-9/16        |
| 29K | 5-1/32      | 1-13/16       |
| 29L | 6-1/4       | 2-7/16        |
| 29M | 3-15/32     | 1-7/16        |
| 29N | 5.31        | 1.813         |

-29-




|     | X     | Y     |
|-----|-------|-------|
| 30A | 2.380 | 2.000 |
| 30B | 3.005 | 2.625 |
| 30C | 3.080 | 2.700 |
| 30D | 3.110 | 2.730 |
| 30E | 2.125 | 1.750 |
| 30F | 3.380 | 3.000 |

All measurements in inches.




-31-

|     | X     | Y     |
|-----|-------|-------|
| 31A | 2.880 | 2.500 |
| 31B | 3.130 | 2.750 |
| 31C | 3.880 | 3.500 |
| 31D | 3.380 | 3.000 |




-32-

|     | X     | Y           |
|-----|-------|-------------|
| 32A | 3.505 | 2.875-3.125 |
| 32B | 4.130 | 3.500-3.750 |
| 32C | 4.380 | 3.750-4.000 |




-33-

|     | X         | Y         |
|-----|-----------|-----------|
| 33A | 3.06 MAX. | 2.52-2.68 |

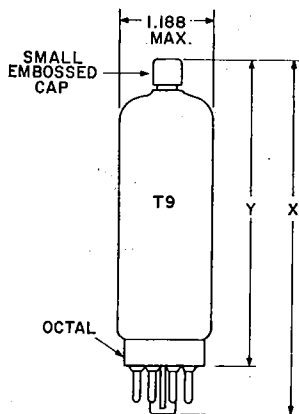


-34-

|     | X          | Y        |
|-----|------------|----------|
| 34A | 4.312 MAX. | 3.7 MAX. |




-35-


|     | X     | Y     |
|-----|-------|-------|
| 35A | 4.133 | 3.760 |
| 35B | 4.125 | 3.750 |
| 35C | 4.54  | 4.18  |

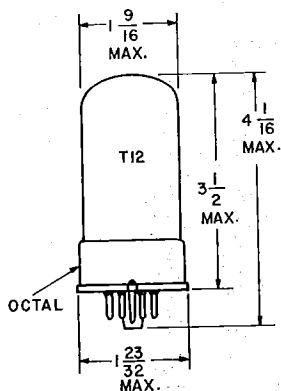

-36-



-37-



-38-

|     | X       | Y      |
|-----|---------|--------|
| 38A | 4-29/32 | 4-9/32 |

All measurements in inches.

# Resistance-Coupled Amplifiers

**R**ESISTANCE-COUPLED, audio-frequency voltage amplifiers utilize simple components and are capable of providing essentially uniform amplification over a relatively wide frequency range.

## Suitable Tubes

In this section, data are given for 48 types of tubes suitable for use in resistance-coupled circuits. These types include low- and high-mu triodes, twin triodes, triode-connected pentodes, and pentodes. The accompanying key to tube types will assist in locating the appropriate data chart.

## Circuit Advantages

For most of the types shown, the data pertain to operation with cathode bias; for all of the pentodes, the data pertain to operation with series screen-grid resistor. The use of a cathode-bias resistor where feasible and a series screen-grid resistor where applicable offers several advantages over fixed-voltage operation.

The advantages are: (1) effects of possible tube differences are minimized; (2) operation over a wide range of plate-supply voltages without appreciable change in gain is feasible; (3) the low frequency at which the amplifier cuts off is easily changed; and (4) tendency toward motorboating is minimized.

## Number of Stages

These advantages can be enhanced by the addition of suitable decoupling filters in the plate supply of each stage of a multi-stage amplifier. With proper filters, three or more amplifier stages can be operated from a single power-supply unit of conventional design with-

| Type   | Chart No. | Type     | Chart No. |
|--------|-----------|----------|-----------|
| 3AU6   | 2         | 6FQ7/    |           |
| 3AV6   | 9         | 6CG7     | 8         |
| 3BC5/  |           | 6SL7GT   | 5         |
| 3CE5   | 11        | 6SN7GTB  | 8         |
| 3CB6/  |           | 6T8A     | 5         |
| 3CF6   | 11        | 7AU7     | 3         |
| 4AU6   | 2         | 8CN7     | 5         |
| 4AV6   | 9         | 8FQ7/    |           |
| 4BQ7A/ |           | 8CG7     | 8         |
| 4BZ7   | 10        | 9AU7     | 3         |
| 4CB6   | 11        | 12AT6    | 5         |
| 5BK7A  | 10        | 12AT7/   |           |
|        |           | ECC81    | 4         |
| 5BQ7A  | 10        | 12AU6    | 2         |
| 5T8    | 5         | 12AU7A/  |           |
| 6AB4   | 4         | ECC82    | 3         |
| 6AG5   | 11        | 12AV6    | 9         |
| 6AT6   | 5         | 12AX7A/  |           |
| 6AU6A  | 2         | ECC83    | 9         |
| 6AV6   | 9         | 12AY7    | 1         |
| 6BC5/  |           | 12FQ7    | 8         |
| 6CE5   | 11        | 12SL7GT  | 5         |
| 6BK7B  | 10        | 12SN7GTA | 8         |
| 6BQ7A/ |           | 19T8     | 5         |
| 6BZ7/  |           | 20EZ7    | 9         |
| 6BS8   | 10        |          |           |
| 6C4    | 3         | 5879P    | 6         |
| 6CB6A/ |           | 5879T    | 7         |
| 6CF6   | 11        | 7025     | 9         |
| 6CN7   | 5         | 7199P    | 12        |
| 6EU7   | 9         | 7199T    | 13        |

T = Triode Unit or Triode Connection  
P = Pentode Unit or Pentode Connection

## KEY TO CHARTS

out encountering any difficulties due to coupling through the power unit. When decoupling filters are not used, not more than two stages should be operated from a single power-supply unit.

### Symbols Used in Resistance-Coupled Amplifier Charts


- $C$  = Blocking Capacitor ( $\mu F$ ).  
 $C_k$  = Cathode Bypass Capacitor ( $\mu F$ ).  
 $C_{gs}$  = Screen-Grid Bypass Capacitor ( $\mu F$ ).  
 $E_{bb}$  = Plate-Supply Voltage (volts).  
 Voltage at plate equals plate-supply voltage minus drop in  $R_p$  and  $R_k$ .  
 $R_k$  = Cathode Resistor (ohms).  
 $R_{gs}$  = Screen-Grid Resistor (megohms).  
 $R_g$  = Grid Resistor (megohms) for following stage.  
 $R_p$  = Plate Resistor (megohms).  
 V.G. = Voltage Gain.  
 $E_o$  = Output Voltage (peak volts).  
 This voltage is obtained across  $R_g$  (for following stage) at any frequency within the flat region of the output vs. frequency curve, and is for the condition where the signal level is adequate to swing the grid of the resistance-coupled amplifier tube to the point where its grid starts to draw current.

Note: The listed values for  $E_o$  are the peak output voltages available when the grid is driven from a low-impedance source. The listed values for the cathode resistors are optimum for any signal source. With a high-impedance source, protection against severe distortion and loss of gain due to input loading may be obtained by the use of a coupling capacitor connected directly to the input grid and a high-value resistor connected between the grid and ground.

### General Circuit Considerations

In the discussions which follow, the frequency ( $f_2$ ) is that value at which the high-frequency response begins to fall off. The frequency ( $f_1$ ) is that value at which the low-frequency response drops below a satisfactory value, as discussed below. A variation of 10 per cent in values of resistors and capacitors has only slight effect on perform-

ance. One-half-watt resistors are usually suitable for  $R_{gs}$ ,  $R_g$ ,  $R_p$ , and  $R_k$  resistors. Capacitors  $C$  and  $C_{gs}$  should have a working voltage equal to or greater than  $E_{bb}$ . Capacitor  $C_k$  may have a low working voltage in the order of 10 to 25 volts.



### Triode Amplifier Heater-Cathode Type

Capacitors  $C$  and  $C_k$  have been chosen to give an output voltage equal to  $0.8 E_o$  for a frequency ( $f_1$ ) of 100 Hz. For any other value of  $f_1$ , multiply values of  $C$  and  $C_k$  by  $100/f_1$ . In




Diagram No. 1

the case of capacitor  $C_k$ , the values shown in the charts are for an amplifier with dc heater excitation; when ac is used, depending on the character of the associated circuit, the gain, and the value of  $f_1$ , it may be necessary to increase the value of  $C_k$  to minimize hum disturbances. It may be desirable to operate the heater at a positive voltage of from 15 to 40 volts with respect to the cathode. The voltage output at  $f_1$  of "n" like stages equals  $(0.8)^n \times E_o$ , where  $E_o$  is the peak output voltage of final stage. For an amplifier of typical construction, the value of  $f_2$  is well above the audio-frequency range for any value of  $R_p$ .

**Pentode Amplifier***Heater-Cathode Type*

Capacitors  $C$ ,  $C_k$ , and  $C_{g2}$  have been chosen to give an output voltage equal to  $0.7 \times E_o$  for a frequency ( $f_1$ ) of 100 cycles. For any other value of  $f_1$ , multiply values of  $C$ ,  $C_k$ , and  $C_{g2}$  by  $100/f_1$ . In the case of capacitor  $C_k$ , the values shown in the charts are for




Diagram No. 2

an amplifier with dc heater excitation; when ac is used, depending on the character of the associated circuits, the voltage gain, and the value of  $f_1$ , it may be necessary to increase the value of  $C_k$  to minimize hum disturbances. It may be desirable to operate the heater at a positive voltage of from 15 to 40 volts with respect to the cathode. The voltage output at  $f_1$  for "n" like stages equals  $(0.7)^n \times E_o$  where  $E_o$  is peak output voltage of final stage. For an amplifier of typical construction, and for  $R_p$  values of 0.1, 0.25, and 0.5 megohm, approximate values of  $f_2$  are 20000, 10000, and 5000 Hz, respectively.

| $E_{bh}$ | $R_p$ | $R_g$ | $R_{g2}$ | $R_k$ | $C_{g2}$ | $C_k$ | $C$ | $E_o^*$ | V.G. |
|----------|-------|-------|----------|-------|----------|-------|-----|---------|------|
| 90       | 0.1   | 0.24  | —        | 1800  | —        | —     | —   | 13      | 24   |
|          | 0.24  | 0.51  | —        | 3700  | —        | —     | —   | 14      | 26   |
|          | 0.51  | 1.0   | —        | 7800  | —        | —     | —   | 16      | 27   |
| 180      | 0.1   | 0.24  | —        | 1300  | —        | —     | —   | 31      | 27   |
|          | 0.24  | 0.51  | —        | 2800  | —        | —     | —   | 33      | 29   |
|          | 0.51  | 1.0   | —        | 5700  | —        | —     | —   | 33      | 30   |
| 300      | 0.1   | 0.24  | —        | 1200  | —        | —     | —   | 58      | 28   |
|          | 0.24  | 0.51  | —        | 2300  | —        | —     | —   | 30      | 30   |
|          | 0.51  | 1.0   | —        | 4800  | —        | —     | —   | 56      | 31   |

1

**12AY7\***See Circuit  
Diagram 1

\* One triode unit.

\* Peak volts.

^ Coupling capacitors should be selected to give desired frequency response. Cathode resistors should be adequately bypassed.

2

3AU6  
4AU6  
6AU6A  
12AU6

See Circuit  
Diagram 2

| $E_{bb}$ | $R_p$ | $R_g$ | $R_{g2}$ | $R_k$ | $C_{g2}$ | $C_k$ | $C$    | $E_o^*$ | V.G. |
|----------|-------|-------|----------|-------|----------|-------|--------|---------|------|
| 90       | 0.22  | 0.22  | 0.340    | 2700  | 0.057    | 5.8   | 0.0081 | 16      | 79   |
|          | 0.22  | 0.47  | 0.370    | 2900  | 0.050    | 5.4   | 0.0055 | 22      | 104  |
|          | 0.22  | 1.0   | 0.380    | 3100  | 0.050    | 5.3   | 0.0034 | 25      | 125  |
|          | 0.47  | 0.47  | 1.00     | 6000  | 0.027    | 2.8   | 0.0042 | 13      | 105  |
|          | 0.47  | 1.0   | 1.00     | 6200  | 0.023    | 2.7   | 0.0027 | 17      | 137  |
|          | 0.47  | 2.2   | 1.00     | 6300  | 0.027    | 2.8   | 0.0019 | 25      | 161  |
|          | 1.0   | 1.0   | 1.90     | 10800 | 0.017    | 1.7   | 0.0025 | 10      | 139  |
|          | 1.0   | 2.2   | 2.40     | 13100 | 0.017    | 1.7   | 0.0017 | 19      | 184  |
| 180      | 0.22  | 0.22  | 0.520    | 1340  | 0.059    | 8.8   | 0.0081 | 31      | 143  |
|          | 0.22  | 0.47  | 0.520    | 1390  | 0.059    | 8.7   | 0.0053 | 43      | 192  |
|          | 0.22  | 1.0   | 0.520    | 1420  | 0.059    | 8.6   | 0.0032 | 48      | 223  |
|          | 0.47  | 0.47  | 1.05     | 2700  | 0.039    | 5.5   | 0.0041 | 34      | 189  |
|          | 0.47  | 1.0   | 1.15     | 2880  | 0.037    | 5.4   | 0.0027 | 43      | 249  |
|          | 0.47  | 2.2   | 1.20     | 2960  | 0.036    | 5.4   | 0.0019 | 50      | 294  |
|          | 1.0   | 1.0   | 2.40     | 5500  | 0.028    | 3.2   | 0.0023 | 33      | 230  |
|          | 1.0   | 2.2   | 2.70     | 6000  | 0.022    | 2.8   | 0.0015 | 40      | 323  |
| 300      | 0.22  | 0.22  | 0.530    | 780   | 0.077    | 13.2  | 0.0082 | 53      | 200  |
|          | 0.22  | 0.47  | 0.540    | 783   | 0.077    | 13.2  | 0.0053 | 65      | 270  |
|          | 0.22  | 1.0   | 0.540    | 800   | 0.077    | 13.1  | 0.0033 | 74      | 316  |
|          | 0.47  | 0.47  | 1.15     | 1590  | 0.057    | 8.4   | 0.0045 | 56      | 275  |
|          | 0.47  | 1.0   | 1.22     | 1650  | 0.049    | 7.4   | 0.0027 | 72      | 357  |
|          | 0.47  | 2.2   | 1.31     | 1720  | 0.045    | 7.2   | 0.0017 | 82      | 418  |
|          | 1.0   | 1.0   | 2.50     | 3300  | 0.036    | 5.3   | 0.0022 | 57      | 352  |
|          | 1.0   | 2.2   | 2.80     | 3500  | 0.031    | 4.2   | 0.0015 | 72      | 466  |

3

6C4  
7AU7\*  
9AU7\*  
12AU7A/  
ECC82\*

See Circuit  
Diagram 1

|      |       |       |       |      |      |        |        |    |    |
|------|-------|-------|-------|------|------|--------|--------|----|----|
| 90   | 0.047 | 0.047 | —     | 1600 | —    | 3.2    | 0.061  | 9  | 10 |
|      | 0.047 | 0.1   | —     | 1800 | —    | 2.5    | 0.033  | 11 | 11 |
|      | 0.047 | 0.22  | —     | 2000 | —    | 2.0    | 0.015  | 14 | 11 |
|      | 0.1   | 0.1   | —     | 3000 | —    | 1.6    | 0.032  | 10 | 11 |
|      | 0.1   | 0.22  | —     | 3800 | —    | 1.1    | 0.015  | 15 | 11 |
|      | 0.1   | 0.47  | —     | 4500 | —    | 1.0    | 0.007  | 18 | 11 |
|      | 0.22  | 0.22  | —     | 6800 | —    | 0.7    | 0.015  | 14 | 11 |
|      | 0.22  | 0.47  | —     | 9500 | —    | 0.5    | 0.0065 | 20 | 11 |
| 0.22 | 1.0   | —     | 11500 | —    | 0.43 | 0.0035 | 24     | 11 |    |
| 180  | 0.047 | 0.047 | —     | 920  | —    | 3.9    | 0.062  | 20 | 11 |
|      | 0.047 | 0.1   | —     | 1200 | —    | 2.9    | 0.037  | 26 | 12 |
|      | 0.047 | 0.22  | —     | 1400 | —    | 2.5    | 0.016  | 29 | 12 |
|      | 0.1   | 0.1   | —     | 2000 | —    | 1.9    | 0.032  | 24 | 12 |
|      | 0.1   | 0.22  | —     | 2800 | —    | 1.4    | 0.016  | 33 | 12 |
|      | 0.1   | 0.47  | —     | 3600 | —    | 1.1    | 0.007  | 40 | 12 |
|      | 0.22  | 0.22  | —     | 5300 | —    | 0.8    | 0.015  | 31 | 12 |
|      | 0.22  | 0.47  | —     | 8300 | —    | 0.56   | 0.007  | 44 | 12 |
| 0.22 | 1.0   | —     | 10000 | —    | 0.48 | 0.0035 | 54     | 12 |    |
| 300  | 0.047 | 0.047 | —     | 870  | —    | 4.1    | 0.065  | 38 | 12 |
|      | 0.047 | 0.1   | —     | 1200 | —    | 3.0    | 0.034  | 52 | 12 |
|      | 0.047 | 0.22  | —     | 1500 | —    | 2.4    | 0.016  | 68 | 12 |
|      | 0.1   | 0.1   | —     | 1900 | —    | 1.9    | 0.032  | 44 | 12 |
|      | 0.1   | 0.22  | —     | 3000 | —    | 1.3    | 0.016  | 68 | 12 |
|      | 0.1   | 0.47  | —     | 4000 | —    | 1.1    | 0.007  | 80 | 12 |
|      | 0.22  | 0.22  | —     | 5300 | —    | 0.9    | 0.015  | 57 | 12 |
|      | 0.22  | 0.47  | —     | 8800 | —    | 0.52   | 0.007  | 82 | 12 |
| 0.22 | 1.0   | —     | 11000 | —    | 0.46 | 0.0035 | 92     | 12 |    |

\* One triode unit.

\* Peak volts.



| $E_{bb}$ | $R_p$ | $R_g$ | $R_{g2}$ | $R_k$ | $C_{g2}$ | $C_k$  | $C$    | $E_o^*$ | V.G. |
|----------|-------|-------|----------|-------|----------|--------|--------|---------|------|
| 90       | 0.1   | 0.1   | —        | 2680  | —        | 2.4    | 0.026  | 8       | 24   |
|          | 0.1   | 0.22  | —        | 3060  | —        | 2.00   | 0.014  | 11      | 25   |
|          | 0.1   | 0.47  | —        | 3390  | —        | 1.84   | 0.0074 | 13      | 28   |
|          | 0.22  | 0.22  | —        | 5500  | —        | 1.33   | 0.0136 | 10      | 25   |
|          | 0.22  | 0.47  | —        | 6300  | —        | 1.01   | 0.0067 | 14      | 28   |
|          | 0.22  | 1.0   | —        | 6930  | —        | 0.92   | 0.0038 | 15      | 28   |
|          | 0.47  | 0.47  | —        | 10900 | —        | 0.63   | 0.007  | 13      | 26   |
|          | 0.47  | 1.0   | —        | 12500 | —        | 0.52   | 0.0043 | 14      | 28   |
| 0.47     | 2.2   | —     | 13500    | —     | 0.47     | 0.0031 | 18     | 28      |      |
| 180      | 0.1   | 0.1   | —        | 1407  | —        | 3.6    | 0.029  | 20      | 31   |
|          | 0.1   | 0.22  | —        | 1674  | —        | 3.0    | 0.016  | 28      | 33   |
|          | 0.1   | 0.47  | —        | 1786  | —        | 2.6    | 0.0083 | 31      | 34   |
|          | 0.22  | 0.22  | —        | 2890  | —        | 1.75   | 0.0140 | 24      | 33   |
|          | 0.22  | 0.47  | —        | 3860  | —        | 1.34   | 0.0077 | 35      | 33   |
|          | 0.22  | 1.0   | —        | 4660  | —        | 1.14   | 0.0047 | 42      | 33   |
|          | 0.47  | 0.47  | —        | 6960  | —        | 0.83   | 0.0075 | 31      | 31   |
|          | 0.47  | 1.0   | —        | 8450  | —        | 0.67   | 0.0046 | 39      | 32   |
| 0.47     | 2.2   | —     | 9600     | —     | 0.55     | 0.0032 | 45     | 32      |      |
| 300      | 0.1   | 0.1   | —        | 974   | —        | 4.0    | 0.028  | 37      | 34   |
|          | 0.1   | 0.22  | —        | 1404  | —        | 3.1    | 0.015  | 57      | 34   |
|          | 0.1   | 0.47  | —        | 2169  | —        | 2.5    | 0.0083 | 78      | 33   |
|          | 0.22  | 0.22  | —        | 2510  | —        | 1.9    | 0.015  | 50      | 33   |
|          | 0.22  | 0.47  | —        | 4200  | —        | 1.3    | 0.0074 | 78      | 33   |
|          | 0.22  | 1.0   | —        | 4950  | —        | 1.1    | 0.0046 | 85      | 32   |
|          | 0.47  | 0.47  | —        | 5700  | —        | 0.90   | 0.0076 | 57      | 33   |
|          | 0.47  | 1.0   | —        | 8720  | —        | 0.62   | 0.0041 | 81      | 32   |
| 0.47     | 2.2   | —     | 9700     | —     | 0.57     | 0.0030 | 88     | 32      |      |

|      |      |      |       |       |     |       |        |     |    |
|------|------|------|-------|-------|-----|-------|--------|-----|----|
| 90   | 0.1  | 0.1  | —     | 4200  | —   | 2.5   | 0.025  | 5.4 | 22 |
|      | 0.1  | 0.22 | —     | 4600  | —   | 2.2   | 0.014  | 7.5 | 27 |
|      | 0.1  | 0.47 | —     | 4800  | —   | 2.0   | 0.0065 | 9.1 | 30 |
|      | 0.22 | 0.22 | —     | 7000  | —   | 1.5   | 0.013  | 7.3 | 30 |
|      | 0.22 | 0.47 | —     | 7800  | —   | 1.3   | 0.007  | 10  | 34 |
|      | 0.22 | 1.0  | —     | 8100  | —   | 1.1   | 0.0035 | 12  | 37 |
|      | 0.47 | 0.47 | —     | 12000 | —   | 0.83  | 0.006  | 10  | 36 |
|      | 0.47 | 1.0  | —     | 14000 | —   | 0.7   | 0.0035 | 14  | 39 |
| 0.47 | 2.2  | —    | 15000 | —     | 0.6 | 0.002 | 16     | 41  |    |

|      |      |      |      |      |     |       |        |    |    |
|------|------|------|------|------|-----|-------|--------|----|----|
| 180  | 0.1  | 0.1  | —    | 1900 | —   | 3.6   | 0.027  | 19 | 30 |
|      | 0.1  | 0.22 | —    | 2200 | —   | 3.1   | 0.014  | 25 | 35 |
|      | 0.1  | 0.47 | —    | 2500 | —   | 2.8   | 0.0065 | 32 | 37 |
|      | 0.22 | 0.22 | —    | 3400 | —   | 2.2   | 0.014  | 24 | 38 |
|      | 0.22 | 0.47 | —    | 4100 | —   | 1.7   | 0.0065 | 34 | 42 |
|      | 0.22 | 1.0  | —    | 4600 | —   | 1.5   | 0.0035 | 38 | 44 |
|      | 0.47 | 0.47 | —    | 6600 | —   | 1.1   | 0.0065 | 29 | 44 |
|      | 0.47 | 1.0  | —    | 8100 | —   | 0.9   | 0.0035 | 38 | 46 |
| 0.47 | 2.2  | —    | 9100 | —    | 0.8 | 0.002 | 43     | 47 |    |

|      |      |      |      |      |     |       |        |    |    |
|------|------|------|------|------|-----|-------|--------|----|----|
| 300  | 0.1  | 0.1  | —    | 1500 | —   | 4.4   | 0.027  | 40 | 34 |
|      | 0.1  | 0.22 | —    | 1800 | —   | 3.6   | 0.014  | 54 | 38 |
|      | 0.1  | 0.47 | —    | 2100 | —   | 3.0   | 0.0065 | 63 | 41 |
|      | 0.22 | 0.22 | —    | 2600 | —   | 2.5   | 0.013  | 51 | 42 |
|      | 0.22 | 0.47 | —    | 3200 | —   | 1.9   | 0.0065 | 65 | 46 |
|      | 0.22 | 1.0  | —    | 3700 | —   | 1.6   | 0.0035 | 77 | 48 |
|      | 0.47 | 0.47 | —    | 5200 | —   | 1.2   | 0.006  | 61 | 48 |
|      | 0.47 | 1.0  | —    | 6300 | —   | 1.0   | 0.0035 | 74 | 50 |
| 0.47 | 2.2  | —    | 7200 | —    | 0.9 | 0.002 | 85     | 51 |    |

4

6AB4  
12AT7/  
ECC81\*See Circuit  
Diagram 1

5

5T8  
6AT6  
6CN7  
6SL7GT\*  
6T8A  
8CN7  
12AT6  
12SL7GT\*  
19T8See Circuit  
Diagram 1

6

As Pentode:  
5879See Circuit  
Diagram 2

| $E_{bb}$ | $R_p$ | $R_g$ | $R_{g2}$ | $R_k$ | $C_{g2}$ | $C_k$ | $C$   | $E_o^*$ | V.G. |
|----------|-------|-------|----------|-------|----------|-------|-------|---------|------|
| 90       | 0.1   | 0.1   | 0.35     | 1700  | 0.044    | 4.6   | 0.020 | 13      | 29   |
|          | 0.1   | 0.22  | 0.35     | 1700  | 0.046    | 4.5   | 0.012 | 17      | 39   |
|          | 0.1   | 0.47  | 0.35     | 1700  | 0.047    | 4.4   | 0.006 | 20      | 47   |
|          | 0.22  | 0.22  | 0.80     | 3000  | 0.034    | 3.2   | 0.010 | 15      | 43   |
|          | 0.22  | 0.47  | 0.80     | 3000  | 0.035    | 3.1   | 0.005 | 21      | 59   |
|          | 0.22  | 1.0   | 0.80     | 3000  | 0.036    | 3.0   | 0.003 | 24      | 67   |
|          | 0.47  | 0.47  | 1.9      | 7000  | 0.021    | 1.8   | 0.005 | 21      | 59   |
|          | 0.47  | 1.0   | 1.9      | 7000  | 0.022    | 1.7   | 0.003 | 25      | 75   |
|          | 0.47  | 2.2   | 1.9      | 7000  | 0.023    | 1.7   | 0.002 | 28      | 87   |
|          | 180   | 0.1   | 0.1      | 0.35  | 700      | 0.060 | 7.4   | 0.020   | 24   |
| 0.1      |       | 0.22  | 0.35     | 700   | 0.062    | 7.3   | 0.012 | 28      | 56   |
| 0.1      |       | 0.47  | 0.35     | 700   | 0.064    | 7.2   | 0.006 | 33      | 65   |
| 0.22     |       | 0.22  | 0.80     | 1200  | 0.045    | 5.5   | 0.010 | 24      | 65   |
| 0.22     |       | 0.47  | 0.80     | 1200  | 0.046    | 5.3   | 0.005 | 31      | 87   |
| 0.22     |       | 1.0   | 0.80     | 1200  | 0.048    | 5.2   | 0.003 | 34      | 101  |
| 0.47     |       | 0.47  | 1.9      | 2500  | 0.033    | 3.5   | 0.005 | 27      | 98   |
| 0.47     |       | 1.0   | 1.9      | 2500  | 0.034    | 3.4   | 0.003 | 32      | 122  |
| 0.47     |       | 2.2   | 1.9      | 2500  | 0.035    | 3.3   | 0.002 | 37      | 140  |
| 300      |       | 0.1   | 0.1      | 0.35  | 300      | 0.075 | 10.8  | 0.020   | 25   |
|          | 0.1   | 0.22  | 0.35     | 300   | 0.077    | 10.6  | 0.012 | 32      | 68   |
|          | 0.1   | 0.47  | 0.35     | 300   | 0.080    | 10.5  | 0.006 | 35      | 83   |
|          | 0.22  | 0.22  | 0.80     | 600   | 0.056    | 7.9   | 0.010 | 28      | 81   |
|          | 0.22  | 0.47  | 0.80     | 600   | 0.057    | 7.5   | 0.005 | 37      | 109  |
|          | 0.22  | 1.0   | 0.80     | 600   | 0.058    | 7.4   | 0.003 | 41      | 123  |
|          | 0.47  | 0.47  | 1.3      | 1200  | 0.044    | 5.3   | 0.005 | 34      | 125  |
|          | 0.47  | 1.0   | 1.3      | 1200  | 0.046    | 5.2   | 0.003 | 42      | 152  |
|          | 0.47  | 2.2   | 1.3      | 1200  | 0.047    | 5.1   | 0.002 | 48      | 174  |
|          | 90    | 0.047 | 0.047    | —     | 1800     | —     | 2.9   | 0.060   | 9    |
| 0.047    |       | 0.1   | —        | 2100  | —        | 2.4   | 0.033 | 12      | 11   |
| 0.047    |       | 0.22  | —        | 2200  | —        | 2.3   | 0.016 | 14      | 21   |
| 0.1      |       | 0.1   | —        | 3200  | —        | 1.8   | 0.027 | 10      | 12   |
| 0.1      |       | 0.22  | —        | 3900  | —        | 1.3   | 0.015 | 13      | 13   |
| 0.1      |       | 0.47  | —        | 4300  | —        | 1.0   | 0.007 | 16      | 13   |
| 0.22     |       | 0.22  | —        | 6200  | —        | 0.87  | 0.015 | 12      | 13   |
| 0.22     |       | 0.47  | —        | 8100  | —        | 0.53  | 0.006 | 16      | 13   |
| 0.22     |       | 1.00  | —        | 9000  | —        | 0.49  | 0.003 | 19      | 14   |
| 180      |       | 0.047 | 0.047    | —     | 1200     | —     | 3.5   | 0.063   | 21   |
|          | 0.047 | 0.1   | —        | 1600  | —        | 2.6   | 0.033 | 29      | 13   |
|          | 0.047 | 0.22  | —        | 1800  | —        | 2.4   | 0.016 | 35      | 13   |
|          | 0.1   | 0.1   | —        | 2200  | —        | 1.9   | 0.031 | 26      | 13   |
|          | 0.1   | 0.22  | —        | 2900  | —        | 1.35  | 0.015 | 33      | 14   |
|          | 0.1   | 0.47  | —        | 3400  | —        | 1.1   | 0.007 | 40      | 14   |
|          | 0.22  | 0.22  | —        | 4500  | —        | 0.92  | 0.015 | 28      | 14   |
|          | 0.22  | 0.47  | —        | 6400  | —        | 0.61  | 0.006 | 39      | 14   |
|          | 0.22  | 1.00  | —        | 8200  | —        | 0.52  | 0.003 | 47      | 14   |
|          | 300   | 0.047 | 0.047    | —     | 1100     | —     | 3.9   | 0.063   | 42   |
| 0.047    |       | 0.1   | —        | 1500  | —        | 2.8   | 0.033 | 65      | 13   |
| 0.047    |       | 0.22  | —        | 1700  | —        | 2.5   | 0.016 | 71      | 14   |
| 0.1      |       | 0.1   | —        | 2000  | —        | 2.1   | 0.032 | 45      | 15   |
| 0.1      |       | 0.22  | —        | 3400  | —        | 1.4   | 0.015 | 74      | 15   |
| 0.1      |       | 0.47  | —        | 3700  | —        | 1.1   | 0.007 | 83      | 15   |
| 0.1      |       | 0.22  | —        | 4300  | —        | 0.97  | 0.015 | 50      | 15   |
| 0.22     |       | 0.47  | —        | 7200  | —        | 0.63  | 0.007 | 88      | 15   |
| 0.22     |       | 1.00  | —        | 7400  | —        | 0.63  | 0.003 | 94      | 15   |

\* Peak volts

7

As Triode:

5879

See Circuit  
Diagram 1

8

6FQ7/  
6CG7\*  
6SN7GTB\*  
8FQ7/  
8CG7\*  
12FQ7\*  
12SN7GTA\*

See Circuit  
Diagram 1

9

3AV6  
4AV6  
6AV6  
6EU7\*  
12AV6  
12AX7A/  
ECC83\*  
20EZ7\*  
7025\*

See Circuit  
Diagram 1

| $E_{bb}$ | $R_p$ | $R_k$ | $R_{g2}$ | $R_k$ | $C_{g2}$ | $C_k$  | $C$    | $E_o^*$ | V.G. |
|----------|-------|-------|----------|-------|----------|--------|--------|---------|------|
| 90       | 0.047 | 0.047 | —        | 1870  | —        | 3.1    | 0.063  | 14      | 13   |
|          | 0.047 | 0.1   | —        | 2230  | —        | 2.5    | 0.031  | 18      | 14   |
|          | 0.047 | 0.22  | —        | 2500  | —        | 2.1    | 0.016  | 20      | 14   |
|          | 0.1   | 0.1   | —        | 3370  | —        | 1.8    | 0.034  | 15      | 14   |
|          | 0.1   | 0.22  | —        | 4100  | —        | 1.3    | 0.015  | 20      | 14   |
|          | 0.1   | 0.47  | —        | 4800  | —        | 1.1    | 0.006  | 23      | 15   |
|          | 0.22  | 0.22  | —        | 7000  | —        | 0.80   | 0.013  | 16      | 14   |
|          | 0.22  | 0.47  | —        | 9100  | —        | 0.65   | 0.007  | 22      | 14   |
| 0.22     | 1.00  | —     | 10500    | —     | 0.60     | 0.004  | 25     | 15      |      |
| 180      | 0.047 | 0.047 | —        | 1500  | —        | 3.6    | 0.066  | 33      | 14   |
|          | 0.047 | 0.1   | —        | 1860  | —        | 2.9    | 0.055  | 41      | 14   |
|          | 0.047 | 0.22  | —        | 2160  | —        | 2.2    | 0.015  | 47      | 15   |
|          | 0.1   | 0.1   | —        | 2750  | —        | 1.8    | 0.028  | 35      | 15   |
|          | 0.1   | 0.22  | —        | 3550  | —        | 1.4    | 0.015  | 45      | 15   |
|          | 0.1   | 0.47  | —        | 4140  | —        | 1.3    | 0.007  | 51      | 16   |
|          | 0.22  | 0.22  | —        | 5150  | —        | 1.0    | 0.016  | 36      | 16   |
|          | 0.22  | 0.47  | —        | 7000  | —        | 0.71   | 0.007  | 45      | 16   |
| 0.22     | 1.00  | —     | 7800     | —     | 0.61     | 0.004  | 51     | 16      |      |
| 300      | 0.047 | 0.047 | —        | 1300  | —        | 3.6    | 0.061  | 59      | 14   |
|          | 0.047 | 0.1   | —        | 1580  | —        | 3.0    | 0.032  | 73      | 15   |
|          | 0.047 | 0.22  | —        | 1800  | —        | 2.5    | 0.015  | 83      | 16   |
|          | 0.1   | 0.1   | —        | 2500  | —        | 1.9    | 0.031  | 68      | 16   |
|          | 0.1   | 0.22  | —        | 3130  | —        | 1.4    | 0.014  | 82      | 16   |
|          | 0.1   | 0.47  | —        | 3900  | —        | 1.2    | 0.0065 | 96      | 16   |
|          | 0.22  | 0.22  | —        | 4800  | —        | 0.95   | 0.015  | 68      | 16   |
|          | 0.22  | 0.47  | —        | 6500  | —        | 0.69   | 0.0065 | 85      | 16   |
| 0.22     | 1.00  | —     | 7800     | —     | 0.58     | 0.0035 | 96     | 16      |      |
| 90       | 0.1   | 0.1   | —        | 4400  | —        | 2.7    | 0.023  | 5       | 29   |
|          | 0.1   | 0.22  | —        | 4700  | —        | 2.4    | 0.013  | 6       | 35   |
|          | 0.1   | 0.47  | —        | 4800  | —        | 2.3    | 0.007  | 8       | 41   |
|          | 0.22  | 0.22  | —        | 7000  | —        | 1.6    | 0.012  | 6       | 39   |
|          | 0.22  | 0.47  | —        | 7400  | —        | 1.4    | 0.006  | 9       | 45   |
|          | 0.22  | 1.0   | —        | 7600  | —        | 1.3    | 0.003  | 11      | 48   |
|          | 0.47  | 0.47  | —        | 12000 | —        | 0.9    | 0.006  | 9       | 48   |
|          | 0.47  | 1.0   | —        | 13000 | —        | 0.8    | 0.003  | 11      | 52   |
| 0.47     | 2.2   | —     | 14000    | —     | 0.7      | 0.002  | 13     | 55      |      |
| 180      | 0.1   | 0.1   | —        | 1800  | —        | 4.0    | 0.025  | 18      | 40   |
|          | 0.1   | 0.22  | —        | 2000  | —        | 3.5    | 0.013  | 25      | 47   |
|          | 0.1   | 0.47  | —        | 2200  | —        | 3.1    | 0.006  | 32      | 52   |
|          | 0.22  | 0.22  | —        | 3000  | —        | 2.4    | 0.012  | 24      | 53   |
|          | 0.22  | 0.47  | —        | 3500  | —        | 2.1    | 0.006  | 34      | 59   |
|          | 0.22  | 1.0   | —        | 3900  | —        | 1.8    | 0.003  | 39      | 63   |
|          | 0.47  | 0.47  | —        | 5800  | —        | 1.3    | 0.006  | 30      | 62   |
|          | 0.47  | 1.0   | —        | 6700  | —        | 1.1    | 0.003  | 39      | 66   |
| 0.47     | 2.2   | —     | 7400     | —     | 1.0      | 0.002  | 45     | 68      |      |
| 300      | 0.1   | 0.1   | —        | 1300  | —        | 4.6    | 0.027  | 43      | 45   |
|          | 0.1   | 0.22  | —        | 1500  | —        | 4.0    | 0.013  | 57      | 52   |
|          | 0.1   | 0.47  | —        | 1700  | —        | 3.6    | 0.006  | 66      | 57   |
|          | 0.22  | 0.22  | —        | 2200  | —        | 3.0    | 0.013  | 54      | 59   |
|          | 0.22  | 0.47  | —        | 2800  | —        | 2.3    | 0.006  | 69      | 65   |
|          | 0.22  | 1.0   | —        | 3100  | —        | 2.1    | 0.003  | 79      | 68   |
|          | 0.47  | 0.47  | —        | 4300  | —        | 1.6    | 0.006  | 62      | 69   |
|          | 0.47  | 1.0   | —        | 5200  | —        | 1.3    | 0.003  | 77      | 73   |
| 0.47     | 2.2   | —     | 5900     | —     | 1.1      | 0.002  | 92     | 75      |      |

\* One triode unit.

\* Peak volts.

10

4BQ7A/  
4BZ7\*  
5BK7A\*  
5BQ7A\*  
6BK7B\*  
6BQ7A/  
6BZ7/  
6BS8\*

See Circuit  
Diagram 1

| $E_{bb}$ | $R_p$ | $R_g$ | $R_{g2}$ | $R_k$ | $C_{g2}$ | $C_k$ | $C$    | $E_o^*$ | V.G. |     |
|----------|-------|-------|----------|-------|----------|-------|--------|---------|------|-----|
| 90       | 0.047 | 0.047 | —        | 1580  | —        | 4.0   | 0.058  | 9       | 18   |     |
|          | 0.047 | 0.10  | —        | 1760  | —        | 3.5   | 0.032  | 13      | 19   |     |
|          | 0.047 | 0.22  | —        | 1820  | —        | 3.0   | 0.015  | 16      | 20   |     |
|          | 0.1   | 0.1   | —        | 2920  | —        | 2.1   | 0.029  | 12      | 19   |     |
|          | 0.1   | 0.22  | —        | 3570  | —        | 1.7   | 0.015  | 17      | 20   |     |
|          | 0.1   | 0.47  | —        | 4020  | —        | 1.4   | 0.0075 | 20      | 20   |     |
|          | 0.22  | 0.22  | —        | 6040  | —        | 0.98  | 0.0135 | 16      | 19   |     |
|          | 0.22  | 0.47  | —        | 7500  | —        | 0.78  | 0.0075 | 21      | 20   |     |
|          | 0.22  | 1.0   | —        | 8800  | —        | 0.63  | 0.0036 | 25      | 20   |     |
|          | 180   | 0.047 | 0.047    | —     | 694      | —     | 6.0    | 0.062   | 25   | 23  |
| 0.047    |       | 0.1   | —        | 817   | —        | 4.4   | 0.032  | 32      | 24   |     |
| 0.047    |       | 0.22  | —        | 905   | —        | 4.0   | 0.0155 | 35      | 25   |     |
| 0.10     |       | 0.1   | —        | 1596  | —        | 2.80  | 0.030  | 30      | 23   |     |
| 0.10     |       | 0.22  | —        | 1630  | —        | 2.30  | 0.0152 | 32      | 24   |     |
| 0.10     |       | 0.47  | —        | 1860  | —        | 2.00  | 0.0073 | 38      | 24   |     |
| 0.22     |       | 0.22  | —        | 3950  | —        | 1.24  | 0.0150 | 35      | 22   |     |
| 0.22     |       | 0.47  | —        | 4500  | —        | 0.96  | 0.0072 | 41      | 23   |     |
| 0.22     |       | 1.0   | —        | 5530  | —        | 0.79  | 0.0038 | 49      | 23   |     |
| 300      |       | 0.047 | 0.047    | —     | 438      | —     | 6.70   | 0.062   | 38   | 26  |
|          | 0.047 | 0.1   | —        | 542   | —        | 5.50  | 0.032  | 48      | 27   |     |
|          | 0.047 | 0.22  | —        | 644   | —        | 4.30  | 0.016  | 57      | 27   |     |
|          | 0.10  | 0.10  | —        | 1009  | —        | 3.5   | 0.031  | 42      | 25   |     |
|          | 0.10  | 0.22  | —        | 1332  | —        | 2.5   | 0.015  | 56      | 26   |     |
|          | 0.10  | 0.47  | —        | 1609  | —        | 2.1   | 0.0074 | 64      | 25   |     |
|          | 0.22  | 0.22  | —        | 2623  | —        | 1.5   | 0.015  | 50      | 24   |     |
|          | 0.22  | 0.47  | —        | 3900  | —        | 1.1   | 0.0073 | 70      | 24   |     |
|          | 0.22  | 1.0   | —        | 4920  | —        | 0.88  | 0.0039 | 84      | 24   |     |
|          | 90    | 0.22  | 0.22     | 0.480 | 3800     | 0.046 | 5.5    | 0.0084  | 10   | 89  |
| 0.22     |       | 0.47  | 0.480    | 3800  | 0.049    | 5.5   | 0.0054 | 16      | 114  |     |
| 0.22     |       | 1.0   | 0.500    | 4400  | 0.045    | 5.3   | 0.0034 | 23      | 128  |     |
| 0.47     |       | 0.47  | 1.04     | 7200  | 0.033    | 2.9   | 0.0044 | 10      | 111  |     |
| 0.47     |       | 1.0   | 1.04     | 7700  | 0.033    | 2.8   | 0.0029 | 15      | 133  |     |
| 0.47     |       | 2.2   | 1.10     | 8400  | 0.031    | 2.6   | 0.0020 | 18      | 152  |     |
| 1.0      |       | 1.0   | 2.50     | 16000 | 0.018    | 1.4   | 0.0023 | 10      | 118  |     |
| 1.0      |       | 2.2   | 2.50     | 18600 | 0.016    | 1.2   | 0.0017 | 11      | 139  |     |
| 180      |       | 0.22  | 0.22     | 0.550 | 1600     | 0.072 | 9.5    | 0.0090  | 30   | 161 |
|          |       | 0.22  | 0.47     | 0.620 | 1800     | 0.062 | 8.5    | 0.0053  | 36   | 208 |
|          | 0.22  | 1.0   | 0.650    | 1900  | 0.062    | 8.5   | 0.0034 | 43      | 239  |     |
|          | 0.47  | 0.47  | 1.00     | 3400  | 0.059    | 6.0   | 0.0048 | 34      | 183  |     |
|          | 0.47  | 1.0   | 1.00     | 3500  | 0.059    | 6.0   | 0.0031 | 41      | 229  |     |
|          | 0.47  | 2.2   | 1.00     | 3800  | 0.059    | 5.8   | 0.0020 | 46      | 262  |     |
|          | 1.0   | 1.0   | 2.60     | 7300  | 0.029    | 2.7   | 0.0022 | 33      | 227  |     |
|          | 1.0   | 2.2   | 2.60     | 7400  | 0.029    | 2.7   | 0.0016 | 38      | 281  |     |
|          | 300   | 0.22  | 0.22     | 0.600 | 980      | 0.085 | 13.0   | 0.0085  | 51   | 223 |
|          |       | 0.22  | 0.47     | 0.680 | 1090     | 0.084 | 12.0   | 0.0055  | 64   | 288 |
| 0.22     |       | 1.0   | 0.700    | 1150  | 0.081    | 11.0  | 0.0033 | 74      | 334  |     |
| 0.47     |       | 0.47  | 1.25     | 2000  | 0.064    | 7.9   | 0.0045 | 52      | 285  |     |
| 0.47     |       | 1.0   | 1.34     | 2150  | 0.061    | 7.6   | 0.0029 | 67      | 363  |     |
| 0.47     |       | 2.2   | 1.53     | 2350  | 0.057    | 7.1   | 0.0019 | 79      | 416  |     |
| 1.0      |       | 1.0   | 2.60     | 4000  | 0.044    | 5.2   | 0.0023 | 51      | 334  |     |
| 1.0      |       | 2.2   | 3.00     | 4700  | 0.038    | 4.3   | 0.0015 | 69      | 427  |     |

11

3BC5/  
3CE5  
3CB6/  
3CF6  
4CB6  
6AG5  
6BC5/  
6CE5  
6CB6A/  
6CF6

See Circuit  
Diagram 2

\* One triode unit.

\* Peak volts.

| $E_{bb}$ | $R_p$ | $R_g$ | $R_{g2}$ | $R_k$ | $C_{g2}$ | $C_k$  | $C$    | $E_o^*$ | V.G. |
|----------|-------|-------|----------|-------|----------|--------|--------|---------|------|
| 90       | 0.22  | 0.22  | 0.560    | 3700  | 0.046    | 4.50   | 0.0090 | 12      | 73   |
|          | 0.22  | 0.47  | 0.600    | 3900  | 0.043    | 4.30   | 0.0055 | 17      | 95   |
|          | 0.22  | 1.0   | 0.640    | 4200  | 0.039    | 4.00   | 0.0033 | 19      | 109  |
|          | 0.47  | 0.47  | 0.870    | 6000  | 0.036    | 2.70   | 0.0046 | 16      | 95   |
|          | 0.47  | 1.0   | 0.980    | 6700  | 0.044    | 3.00   | 0.0030 | 22      | 113  |
|          | 0.47  | 2.2   | 1.00     | 6700  | 0.043    | 2.80   | 0.0020 | 25      | 131  |
|          | 1.0   | 1.0   | 2.00     | 12200 | 0.021    | 1.44   | 0.0028 | 15      | 119  |
|          | 1.0   | 2.2   | 2.20     | 12800 | 0.024    | 1.74   | 0.0016 | 21      | 167  |
| 180      | 0.22  | 0.22  | 0.530    | 1570  | 0.069    | 7.50   | 0.0088 | 32      | 82   |
|          | 0.22  | 0.47  | 0.600    | 1730  | 0.064    | 7.40   | 0.0064 | 38      | 164  |
|          | 0.22  | 1.0   | 0.650    | 1820  | 0.061    | 7.30   | 0.0034 | 45      | 190  |
|          | 0.47  | 0.47  | 1.12     | 3200  | 0.053    | 5.30   | 0.0046 | 35      | 147  |
|          | 0.47  | 1.0   | 1.40     | 3500  | 0.042    | 5.10   | 0.0028 | 40      | 209  |
|          | 0.47  | 2.2   | 1.57     | 3740  | 0.040    | 5.40   | 0.0019 | 45      | 250  |
|          | 1.0   | 1.0   | 2.50     | 6500  | 0.039    | 2.80   | 0.0024 | 34      | 179  |
|          | 1.0   | 2.2   | 3.40     | 7500  | 0.026    | 2.30   | 0.0015 | 39      | 277  |
| 300      | 0.22  | 0.22  | 0.600    | 9200  | 0.086    | 11.2   | 0.0085 | 52      | 182  |
|          | 0.22  | 0.47  | 0.670    | 1010  | 0.076    | 10.5   | 0.0052 | 66      | 236  |
|          | 0.22  | 1.0   | 0.720    | 1100  | 0.076    | 10.0   | 0.0033 | 77      | 257  |
|          | 0.47  | 0.47  | 1.25     | 1950  | 0.060    | 7.0    | 0.0044 | 41      | 221  |
|          | 0.47  | 1.0   | 1.43     | 3210  | 0.053    | 6.4    | 0.0027 | 72      | 296  |
|          | 0.47  | 2.2   | 1.45     | 2200  | 0.055    | 6.3    | 0.0019 | 82      | 345  |
|          | 1.0   | 1.0   | 3.00     | 4100  | 0.040    | 4.2    | 0.0022 | 57      | 295  |
|          | 1.0   | 2.2   | 3.30     | 4340  | 0.037    | 3.6    | 0.0016 | 74      | 378  |
| 90       | 0.047 | 0.047 | —        | 1292  | —        | 3.3    | 0.060  | 8       | 12   |
|          | 0.047 | 0.1   | —        | 1401  | —        | 2.8    | 0.032  | 10      | 13   |
|          | 0.047 | 0.22  | —        | 1470  | —        | 2.4    | 0.016  | 11      | 13   |
|          | 0.10  | 0.1   | —        | 2630  | —        | 1.60   | 0.029  | 9       | 13   |
|          | 0.10  | 0.22  | —        | 3090  | —        | 1.24   | 0.015  | 12      | 13   |
|          | 0.10  | 0.47  | —        | 3440  | —        | 1.10   | 0.008  | 14      | 14   |
|          | 0.22  | 0.22  | —        | 6550  | —        | 0.70   | 0.015  | 12      | 12   |
|          | 0.22  | 0.47  | —        | 8270  | —        | 0.51   | 0.0077 | 16      | 12   |
| 0.22     | 1.0   | —     | 9130     | —     | 0.44     | 0.0045 | 18     | 12      |      |
| 180      | 0.047 | 0.047 | —        | 723   | —        | 4.0    | 0.061  | 16      | 14   |
|          | 0.047 | 0.1   | —        | 836   | —        | 3.5    | 0.032  | 20      | 14   |
|          | 0.047 | 0.22  | —        | 948   | —        | 2.9    | 0.016  | 24      | 15   |
|          | 0.10  | 0.1   | —        | 1543  | —        | 2.0    | 0.031  | 17      | 14   |
|          | 0.10  | 0.22  | —        | 2002  | —        | 1.6    | 0.016  | 24      | 14   |
|          | 0.10  | 0.47  | —        | 2522  | —        | 1.2    | 0.0082 | 30      | 13   |
|          | 0.22  | 0.22  | —        | 4390  | —        | 0.79   | 0.015  | 24      | 13   |
|          | 0.22  | 0.47  | —        | 6122  | —        | 0.57   | 0.0078 | 33      | 12   |
| 0.22     | 1.0   | —     | 8060     | —     | 0.47     | 0.0046 | 41     | 12      |      |
| 300      | 0.047 | 0.047 | —        | 534   | —        | 4.0    | 0.061  | 27      | 15   |
|          | 0.047 | 0.1   | —        | 726   | —        | 3.6    | 0.031  | 38      | 15   |
|          | 0.047 | 0.22  | —        | 840   | —        | 3.0    | 0.015  | 44      | 15   |
|          | 0.10  | 0.1   | —        | 1117  | —        | 2.3    | 0.031  | 26      | 15   |
|          | 0.10  | 0.22  | —        | 1613  | —        | 1.7    | 0.0155 | 41      | 14   |
|          | 0.10  | 0.47  | —        | 2043  | —        | 1.31   | 0.0078 | 51      | 14   |
|          | 0.22  | 0.22  | —        | 3133  | —        | 0.93   | 0.015  | 36      | 13   |
|          | 0.22  | 0.47  | —        | 4480  | —        | 0.69   | 0.0079 | 51      | 13   |
| 0.22     | 1.0   | —     | 4930     | —     | 0.56     | 0.0045 | 55     | 13      |      |

12

7199

Pentode  
UnitSee Circuit  
Diagram 2

13

7199

Triode  
UnitSee Circuit  
Diagram 1

# Replacement Guide— Entertainment Receiving Types

This guide was prepared to assist in the selection of current direct replacement tube types for foreign and domestic receiving tubes. Domestic and foreign receiving tubes are listed in numerical alphabetical sequence with the RCA type that can be used as a direct replacement. Types replaceable only by themselves are not included. Whenever possible, a defective tube should be replaced by a type having the same number, or a superseding number.

The primary considerations in selecting direct replacement tubes for this guide are: (1) mechanical interchangeability, (2) electrical interchangeability, (3) performance characteristics similar to that of the original equipment. All replacements shown are unilateral—that is the RCA tube can replace the indicated type. The reverse however, is not always permissible because of differences in electrical ratings. In some compact equipment designs, space limitations may make the suggested replacement impractical.

| Type to be Replaced | Replace by RCA Type |
|---------------------|---------------------|
| OZ4, OZ4A           | OZ4A/OZ4            |
| OZ4G                | OZ4A/OZ4            |
| IAD2                | 1AD2A               |
| IAY2                | 1AY2A               |
| 1B3GT               | 1G3GTA/1B3GT        |
| 1C1                 | 1R5                 |
| 1DN5                | 1U5                 |
| 1F3                 | 1T4                 |
| 1FD9                | 1S5                 |
| 1G3GT               | 1G3GTA/1B3GT        |
| 1G3GT/<br>1B3GT     | 1G3GTA/1B3GT        |
| 1J3, 1J3A           | 1K3A/1J3            |
| 1J3GT               | 1K3A/1J3            |
| 1K3, 1K3GT          | 1K3A/1J3            |
| 1N2, 1N2A           | 1G3GTA/1B3GT        |
| 1N5G                | 1N5GT               |
| 1N5GT/G             | 1N5GT               |
| 1P5G                | 1N5GT               |
| 1P5GT               | 1N5GT               |
| 1P5GT/G             | 1N5GT               |
| 1P10                | 3S4                 |
| 1P11                | 3V4                 |
| 1U6*                | 1L6                 |
| 1X2, 1X2A,<br>1X2B  | 1X2C                |
| 1X2B/1X2A           | 1X2C                |
| 2A3H                | 2A3                 |
| 2AF4                | 2AF4B/2DZ4          |
| 2AF4A               | 2AF4B/2DZ4          |
| 2AF4B               | 2AF4B/2DZ4          |
| 2AH2                | 2BU2/2AH2           |
| 2AS2                | 2AS2A               |
| 2BA2                | 2AV2                |
| 2BN4                | 2BN4A               |
| 2BU2                | 2BU2/2AH2           |
| 2CN3                | 2CN3A               |
| 2CW4                | 2DS4                |
| 2DZ4                | 2AF4B/2DZ4          |
| 2EA5                | 2CY5                |
| 2ER5                | 2GK5/2FQ5A          |

| Type to be Replaced  | Replace by RCA Type          |
|----------------------|------------------------------|
| 2E55                 | 2GK5/2FQ5A                   |
| 2EV5                 | 2CY5                         |
| 2FQ5                 | 2GK5/2FQ5A                   |
| 2FQ5A                | 2GK5/2FQ5A                   |
| 2FS5                 | 2GK5/2FQ5A                   |
| 2GU5                 | 2FS5                         |
| 2GK5                 | 2GK5/2FQ5A                   |
| 2HA5                 | 2GK5/2FQ5A                   |
| 2HQ5                 | 2GK5/2FQ5A                   |
| 2T4*                 | 2AF4B/2DZ4                   |
| 3A3, 3A3A,<br>3A3B   | 3A3C                         |
| 3A3A/3B2             | 3A3C                         |
| 3AF4                 | 3AF4A/3DZ4                   |
| 3AF4A                | 3AF4A/3DZ4                   |
| 3AF4B                | 3AF4A/3DZ4                   |
| 3AT2, 3AT2A          | 3AT2B                        |
| 3AU6                 | 3BA6                         |
| 3AW2                 | 3AW2A                        |
| 3AW3                 | 3A3C                         |
| 3B2                  | 3A3C                         |
| 3B5                  | 3Q5GT                        |
| 3BA6                 | 3AU6                         |
| 3BC5                 | 3BC5/3CE5                    |
| 3BL2                 | 3BL2A                        |
| 3BN4,<br>3BS2, 3BS2A | 3BN4A<br>3BW2/3BS2A/<br>3BT2 |
| 3BT2                 | 3BW2/3BS2A/<br>3BT2          |
| 3BW2                 | 3BW2/3BS2A/<br>3BT2          |
| 3BU8                 | 3BU8/3GS8                    |
| 3BU8A                | 3BU8/3GS8                    |
| 3BY6                 | 3CS6                         |
| 3C5GT                | 3Q5GT                        |
| 3CB6                 | 3CB6/3CF6                    |
| 3CE5                 | 3BC5/3CE5                    |
| 3CF6                 | 3CB6/3CF6                    |
| 3CN3                 | 3CN3B                        |

| Type to be Replaced | Replace by RCA Type |
|---------------------|---------------------|
| 3CN3A               | 3CN3B               |
| 3CU3                | 3CU3A               |
| 3CY3                | 3DB3/3CY3           |
| 3CZ3                | 3CZ3A               |
| 3DB3                | 3DB3/3CY3           |
| 3DE6                | 3BZ6                |
| 3DF3                | 3CX3                |
| 3DT6                | 3DT6A               |
| 3DZ4                | 3AF4A/3DZ4          |
| 3EA5                | 3CY5                |
| 3EH7                | 3EH7/XF183          |
| 3EJ7                | 3EJ7/XF184          |
| 3EV5                | 3CY5                |
| 3FH5*               | 3ER5                |
| 3FQ5                | 3GK5                |
| 3FQ5A               | 3GK5                |
| 3FV5                | 3GK5                |
| 3GS8                | 3BU8/3GS8           |
| 3GU5*               | 3FS5                |
| 3HA5                | 3HM5/3HA5           |
| 3HM5                | 3HM5/3HA5           |
| 3HS8                | 3BU8/3GS8           |
| 3JC6                | 3JC6A               |
| 3KF8                | 3BU8/3GS8           |
| 3M-V7               | 3BZ6                |
| 3M-R24              | 3DK6                |
| 3Q5G                | 3Q5GT               |
| 3Q5GT/G             | 3Q5GT               |
| 4BA6*               | 4AU6                |
| 4BC5                | 4BZ6                |
| 4BC8                | 4BQ7A/4BZ7          |
| 4BL8                | 4BL8/XCF80          |
| 4BQ7                | 4BQ7A/4BZ7          |
| 4BS8                | 4BQ7A/4BZ7          |
| 4BU8                | 4BU8/4GS8           |
| 4BU8A               | 4BU8/4GS8           |
| 4BY6                | 4CS6                |
| 4BZ7                | 4BQ7A/4BZ7          |
| 4BZ8                | 4BQ7A/4BZ7          |
| 4CF6                | 4CB6                |

\* Replacement type may not work in some circuits.  
\* Use replacement type in parallel heater circuits only.

| Type to be Replaced | Replace by RCA Type |
|---------------------|---------------------|
| 4DE6                | 4BZ6                |
| 4DK6                | 4BZ6                |
| 4DT6                | 4DT6A               |
| 4EH7                | 4EH7/LF183          |
| 4EJ7                | 4EJ7/LF184          |
| 4ES8                | 4ES8/XCC189         |
| 4FQ5                | 4GK5                |
| 4FQ5A               | 4GK5                |
| 4FY5                | 4GK5                |
| 4GJ7                | 4GJ7/XCF801         |
| 4GM6                | 4EW6                |
| 4GS7 *              | 4LJ8                |
| 4GS8                | 4BU8/4GS8           |
| 4GS8/4BU8           | 4BU8/4GS8           |
| 4HA5                | 4HA5/PC900          |
| 4HK5                | 4HQ5                |
| 4HM5                | 4HQ5                |
| 4HM6                | 4JC6A               |
| 4HS8                | 4BU8/4GS8           |
| 4HT6                | 4JD6                |
| 4JC6                | 4JG6A               |
| 4JH6                | 4BZ6                |
| 4KF8                | 4HS8                |
| 4KN8                | 4KN8/4RHH8          |
| 4RHH2               | 4BQ7A/4BZ7          |
| 4RHH8               | 4KN8/4RHH8          |
| 5AR4                | 5AR4/GZ34           |
| 5AS4                | 5AS4A               |
| 5AS4A               | 5U4GB               |
| 5AU4                | 5V3A/5AU4           |
| 5AV8 *              | 5B8                 |
| 5AX4GT              | 5Y3GT               |
| 5AZ4                | 5Y3GT               |
| 5BC3                | 5BC3A               |
| 5BC8                | 5BQ7A               |
| 5BK7                | 5BK7A               |
| 5BK7B               | 5BK7A               |
| 5BQ7                | 5BQ7A               |
| 5BS7                | 5BQ7A               |
| 5BX8                | 5BQ7A               |
| 5BZ7                | 5BQ7A               |
| 5BZ8                | 5BQ7A               |
| 5BR8                | 5BR8/5FV8           |
| 5CG4                | 5Y3GT               |
| 5CG8                | 5F67                |
| 5CL8                | 5CL8A               |
| 5CM8                | 5KZ8                |
| 5CQ8                | 5GH8A               |
| 5DB4                | 5U4GB               |
| 5EA8                | 5GH8A               |
| 5FV8                | 5BR8/5FV8           |
| 5GH8                | 5GH8A               |
| 5GJ7                | 5GJ7/LCF801         |
| 5GX6                | 5HZ6                |
| 5KD8                | 5GH8A               |
| 5MHH3               | 5J6                 |
| 5RHH2               | 5BQ7A               |
| 5SRP1               | 4BL8/XCF80          |
| 5T4                 | 5U4GB               |
| 5U4G                | 5U4GB               |
| 5U4GA               | 5U4GB               |
| 5U8/5CQ8            | 5U8                 |
| 5V3                 | 5V3A/5AU4           |
| 5V3A                | 5V3A/5AU4           |
| 5V4                 | 5V4GA               |

| Type to be Replaced | Replace by RCA Type    |
|---------------------|------------------------|
| 5V4GA               | 5U4GB                  |
| 5V4GY               | 5U4GB                  |
| 5Y3G                | 5Y3GT                  |
| 5Y3GA               | 5Y3GT                  |
| 5Y3GT/G             | 5Y3GT                  |
| 5Y4G                | 5Y4GT                  |
| 5Y4GA               | 5Y4GT                  |
| 5Z4                 | 5Y3GT                  |
| 5Z4GT               | 5Y3GT                  |
| 5Z4GT/G             | 5Y3GT                  |
| 5Z4MG               | 5Y3GT                  |
| 6A8G                | 6A8                    |
| 6A8GT               | 6A8                    |
| 6AC7A               | 6AC7                   |
| 6AC7Y               | 6AC7                   |
| 6AC7W               | 6AC7                   |
| 6AD6G               | 6AF6G                  |
| 6AF4                | 6AF4A                  |
| 6AF6GT              | 6AF6G                  |
| 6AG5                | 6BC5/6CE5              |
| 6AG7Y               | 6AG7                   |
| 6AK5                | 6AK5/EF95              |
| 6AK8                | 6AK8/EABC80            |
| 6AL3                | 6AL3/EY88              |
| 6AJ4 *              | 6AM4                   |
| 6AM8                | 6AM8A                  |
| 6AN8                | 6AN8A                  |
| 6AQ5                | 6AQ5A                  |
| 6AQ8                | 6AQ8/ECC85             |
| 6AR8                | 6JH8                   |
| 6AS4GT              | 6AX4GTB                |
| 6AS5                | 6CU5                   |
| 6AS11               | 6AF11                  |
| 6AT8                | 6AT8A                  |
| 6AU4GT              | 6AU4GTA                |
| 6AU5G               | 6AU5GT                 |
| 6AU6                | 6AU6A                  |
| 6AU8                | 6AU8A                  |
| 6AV5GT              | 6AV5GA                 |
| 6AV6                | 6AT6                   |
| 6AW8                | 6AW8A                  |
| 6AX4GT              | 6AX4GTB,<br>6DM4A/6DA4 |
| 6AX4GTA             | 6AX4GTB,<br>6DM4A/6DA4 |
| 6AY3                | 6AY3B                  |
| 6AY3A               | 6AY3B                  |
| 6B8G                | 6B8                    |
| 6B8GT               | 6B8                    |
| 6B32                | 6AL5                   |
| 6BA3                | 6AY3B                  |
| 6BA3A               | 6AY3B                  |
| 6BA6                | 6BA6/EF93              |
| 6BA8                | 6BA8A                  |
| 6BC5                | 6BC5/6CE5              |
| 6BC8                | 6BC8/6BZ8              |
| 6BC32               | 6AT6                   |
| 6BD4                | 6BK4C/6EL4A            |
| 6BD4A               | 6BK4C/6EL4A            |
| 6BD11               | 6AF11                  |
| 6BE3                | 6BE3/6BZ3              |
| 6BE8                | 6F67                   |
| 6BE8A               | 6F67                   |
| 6BJ3                | 6BE3/6BZ3              |
| 6BZ3                | 6BE3/6BZ3              |

| Type to be Replaced | Replace by RCA Type |
|---------------------|---------------------|
| 6BG6GA              | 6BG6G               |
| 6BH3                | 6BH3A               |
| 6BJ6A               | 6BJ6                |
| 6BK4                | 6BK4C/6EL4A         |
| 6BK4A               | 6BK4C/6EL4A         |
| 6BK4B               | 6BK4C/6EL4A         |
| 6BK4C               | 6BK4C/6EL4A         |
| 6BK6*               | 6QA6                |
| 6BK7                | 6BK7B               |
| 6BK7A               | 6BK7B               |
| 6BL7GT              | 6BL7GTA             |
| 6BL8                | 6BL8/ECF80          |
| 6BM8                | 6BM8/ECL82          |
| 6BN4                | 6BN4A               |
| 6BN6                | 6BN6/6SK6           |
| 6BQ5                | 6BQ5/EL84           |
| 6BQ6G               | 6BQ6GTB/6CU6        |
| 6BQ6GA              | 6BQ6GTB/6CU6        |
| 6BQ6GT              | 6BQ6GTB/6CU6        |
| 6BQ6GTA             | 6BQ6GTB/6CU6        |
| 6BQ6GTB             | 6BQ6GTB/6CU6        |
| 6BQ7                | 6BQ7A/6BZ7/<br>6BS8 |
| 6BQ7A               | 6BQ7A/6BZ7/<br>6BS8 |
| 6BR3                | 6BR3/6RK19          |
| 6BR8                | 6BR8A/6FV8A         |
| 6BR8A               | 6BR8A/6FV8A         |
| 6BS3                | 6BS3A               |
| 6BS8                | 6BQ7A/6BZ7/<br>6BS8 |
| 6BU6                | 6BF6                |
| 6BU8A               | 6BU8                |
| 6BW3                | 6CG3/6BW3/<br>6DQ3  |
| 6BX8                | 6BQ7A/6BZ7/<br>6BS8 |
| 6BY5G               | 6BY5GA              |
| 6BY6                | 6CS6                |
| 6BZ3                | 6BE3/6BZ3           |
| 6BZ7                | 6BQ7A/6BZ7/<br>6BS8 |
| 6BZ8                | 6BC8/6BZ8           |
| 6C5G                | 6C5                 |
| 6C5GT               | 6C5                 |
| 6C5GT/G             | 6C5                 |
| 6C16                | 6BL8/ECF80          |
| 6C31                | 6K8                 |
| 6CA7                | 6CA7/EL34           |
| 6CB5                | 6CB5A               |
| 6CB6                | 6CB6A/6CF6          |
| 6CB6A               | 6CB6A/6CF6          |
| 6CD3                | 6CE3/6CD3/<br>6DT3  |
| 6CD6G               | 6CD6GA              |
| 6CE3                | 6CE3/6CD3/<br>6DT3  |
| 6CE5                | 6BC5/6CE5           |
| 6CF6                | 6CB6A/6CF6          |
| 6CG3                | 6CG3/6BW3/<br>6DQ3  |
| 6CG3/6CD3           | 6CG3/6BW3/<br>6DQ3  |

\* Replacement type may not work in some circuits.  
 \* Use replacement type in parallel heater circuits only.

| Type to be Replaced | Replace by RCA Type    | Type to be Replaced | Replace by RCA Type | Type to be Replaced | Replace by RCA Type |
|---------------------|------------------------|---------------------|---------------------|---------------------|---------------------|
| 6CG6                | 6BD6                   | 6FQ5                | 6GK5/6FQ5A          | 6JS6B               | 6JS6C               |
| 6CG7                | 6FQ7/6CG7              | 6FQ5A               | 6GK5/6FQ5A          | 6JT6                | 6JT6A               |
| 6CG8                | 6CG8A                  | 6FQ7                | 6FQ7/6CG7           | 6JU8                | 6JU8A               |
| 6CH3                | 6CJ3/6CH3              | 6FV8                | 6BR8A/6FV8A         | 6JW8                | 6JW8/ECF802         |
| 6CJ3                | 6CJ3/6CH3              | 6FV8A               | 6BR8A/6FV8A         | 6K6                 | 6K6GT               |
| 6CK3                | 6CL3/6CK3              | 6FW8                | 6ES8/ECC189         | 6K6GT/G             | 6K6GT               |
| 6CL8                | 6CL8A                  | 6FY5                | 6FY5/EC97           | 6K7G                | 6K7                 |
| 6CQ4                | 6DE4/6CQ4              | 6GB3A               | 6RQ6GTB/6CU6        | 6K7GT               | 6K7                 |
| 6CW4                | 6DS4                   | 6GB5                | 6GB5/EL500          | 6K8G                | 6K8                 |
| 6CW5                | 6CW5/EL86              | 6GB6                | 6GW6/6DQ6B          | 6K8GT               | 6K8                 |
| 6CU8                | 6BQ6GTB/6CU6           | 6GB7                | 6GW6/6DQ6B          | 6K11                | 6K11/6Q11           |
| 6CY5/6CE5           | 6CY5                   | 6GF7                | 6GF7A               | 6K08                | 6U8A/6K08           |
| 6CC31               | 6J6A                   | 6GH8                | 6GH8A               | 6K78                | 6BU8                |
| 6D2                 | 6AL5                   | 6GJ5                | 6GJ5A               | 6KN8                | 6KN8/6RHH8          |
| 6DA4                | 6AX4GTB,<br>6DM4A/6DA4 | 6GJ7                | 6GJ7/ECG801         | 6KR8A               | 6KR8                |
| 6DA4A               | 6AX4GTB,<br>6DM4A/6DA4 | 6GK5                | 6GK5/6FQ5A          | 6KS6                | 6BN6/6KS6           |
| 6DJ8                | 6ES8/ECC199            | 6GK17               | 6AU4GTA             | 6KV6                | 6KV6A               |
| 6DL4                | 6DL4/EC88              | 6GS8                | 6BU8                | 6KY8                | 6KY8A               |
| 6DL5                | 6DL5/EL95              | 6GT5                | 6GT5A               | 6L5*                | 6C5                 |
| 6DM4                | 6DM4A/6DA4             | 6GU5*               | 6FS5                | 6L6                 | 6L6GC               |
| 6DM4A               | 6DM4A/6DA4             | 6GV8                | 6GV8/ECL85          | 6L6A                | 6L6GC               |
| 6DQ3                | 6CG3/6BW3/<br>6DQ3     | 6GW6                | 6GW6/6DQ6B          | 6L6G                | 6L6GC               |
| 6DQ6A               | 6GW6/6DQ6B             | 6GW8                | 6GW8/ECL86          | 6L6GA               | 6L6GC               |
| 6DQ6B               | 6GW6/6DQ6B             | 6GX6                | 6GY6/6GX6           | 6L6GB               | 6L6GC               |
| 6DT3                | 6CE3/6CD3/<br>6DT3     | 6GY6                | 6GY6/6GX6           | 6L7G                | 6L7                 |
| 6DT4                | 6AX4GTB,<br>6DM4A/6DA4 | 6H6G                | 6H6                 | 6L7GT               | 6L7                 |
| 6DT6                | 6DT6A                  | 6H6GT               | 6H6                 | 6L10                | 6AG7                |
| 6DW4                | 6DW4B                  | 6H6GT/G             | 6H6                 | 6L12                | 6AQ8/ECC85          |
| 6DW4A               | 6DW4B                  | 6H31                | 6BE6                | 6L13                | 12AX7A/ECC83        |
| 6DX8                | 6DX8/ECL84             | 6HA5                | 6HM5/6HA5           | 6L31                | 6AQ5A               |
| 6EA5                | 6EV5                   | 6HA6                | 6HB6/6HA6           | 6L43                | 6CL6                |
| 6EA7                | 6EM7/6EA7              | 6HB6                | 6HB6/6HA6           | 6LC6                | 6LJ6A/6LH6A         |
| 6EC4                | 6EC4A/EY500            | 6HE5                | 6J85/6HE5           | 6LD12               | 6AK8/EABC80         |
| 6EC4A               | 6EC4A/EY500            | 6HGB                | 6HGB/ECF86          | 6LF6                | 6LF6/6LX6           |
| 6EH4                | 6EH4A                  | 6HK5*               | 6HM5/6HA5           | 6LH6                | 6LJ6A/6LH6A         |
| 6EH5                | 6CU5                   | 6HM5                | 6HM5/6HA5           | 6LH6A               | 6LJ6A/6LH6A         |
| 6EH7                | 6EH7/EF183             | 6HQ6                | 6JH6                | 6LJ6                | 6LJ6A/6LH6A         |
| 6EJ4                | 6EJ4A                  | 6HT6                | 6JD6                | 6LJ6A               | 6LJ6A/6LH6A         |
| 6EJ7                | 6EJ7/EF184             | 6HU6                | 6HU6/EM87           | 6LN8                | 6LN8/LCF80          |
| 6EL4                | 6BK4C/6EL4A            | 6HU8                | 6HU8/ELL80          | 6LQ6                | 6LQ6/6JE6C          |
| 6EL4A               | 6BK4C/6EL4A            | 6HV5                | 6HV5A               | 6LX8                | 6LX8/LCF802         |
| 6EM7                | 6EM7/6EA7              | 6HZ5                | 6HZ5/6JD5           | 6M1                 | 6U5                 |
| 6ES8                | 6ES8/ECC189            | 6HZ8*               | 6GN8                | 6MHH3               | 6J6A                |
| 6ET7 *              | 6KU8                   | 6J5G                | 6J5                 | 6MK8                | 6MK8A               |
| 6EX6                | 6CD6GA                 | 6J5GT               | 6J5                 | 6N7G                | 6N7                 |
| 6EY5                | 6EZ5                   | 6J5GT/G             | 6J5                 | 6N7GT               | 6N7                 |
| 6F5G                | 6F5                    | 6J6                 | 6J6A                | 6N7GT/G             | 6N7                 |
| 6F5GT               | 6F5                    | 6J7G                | 6J7                 | 6P9                 | 6AQ5A               |
| 6F6G                | 6F6                    | 6J7GT               | 6J7                 | 6P15                | 6BQ5/EL84           |
| 6F6GT               | 6F6                    | 6J10                | 6Z10/6J10           | 6PL12               | 6BM8/ECL82          |
| 6F6GT/G             | 6F6                    | 6JA8*               | 6GN8                | 6Q7G                | 6Q7                 |
| 6F10                | 6AC7                   | 6JB5                | 6JB5/6HE5           | 6Q7GT               | 6Q7                 |
| 6F24                | 6EJ7/EF184             | 6JB6                | 6JB6A               | 6Q11                | 6K11/6Q11           |
| 6F29                | 6EH7/EF183             | 6JC6                | 6JC6A               | 6RHH2               | 6BC8/6BZ8           |
| 6F30                | 6EJ7/EF184             | 6JD5                | 6HZ5/6JD5           | 6RHH8               | 6KN8/6RHH8          |
| 6F31                | 6AU6A                  | 6JE6                | 6LQ6/6JE6C          | 6RK19               | 6BR3/6RK19          |
| 6F32                | 6AK5/EF95              | 6JEA6               | 6LQ6/6JE6C          | 6RP22               | 6CL6                |
| 6F36                | 6AH6                   | 6JEB6               | 6LQ6/6JE6C          | 6S4                 | 6S4A                |
| 6FG6                | 6FG6/EM84              | 6JEC6               | 6LQ6/6JE6C          | 6S5G                | 6E5                 |
| 6FG6G               | 6FG6/EM84              | 6JG6                | 6JG6A               | 6SA7G               | 6SA7,6SA7GT         |
|                     |                        | 6JL6                | 6JK6                | 6SA7GT              | 6SA7,6SA7GT         |
|                     |                        | 6JM6                | 6JM6A               | 6SB7                | 6SB7Y               |
|                     |                        | 6JN6A               | 6JN6                | 6SC7GT              | 6SC7                |
|                     |                        | 6JS6                | 6JS6C               | 6SF5GT              | 6SF5                |
|                     |                        | 6JS6A               | 6JS6C               |                     |                     |

\* Replacement type may not work in some circuits.

\* Use replacement type in parallel heater circuits only.



| Type to be Replaced | Replace by RCA Type | Type to be Replaced | Replace by RCA Type    | Type to be Replaced | Replace by RCA Type    |
|---------------------|---------------------|---------------------|------------------------|---------------------|------------------------|
| 6SF7GT              | 6SF7                | 10GV8               | 10GV8/LCL85            | 12EN6               | 12W6GT                 |
| 6SG7GT              | 6SG7                | 10JA8               | 10JA8/10LZ8            | 12F31               | 12AU6                  |
| 6SH7GT              | 6SH7                | 10LZ8               | 10JA8/10LZ8            | 12FT6               | 12AE6A                 |
| 6SJ7GT              | 6SJ7                | 10PL12              | 50BM8/UCL82            | 12GB3               | 12BQ6GTB/12CU6         |
| 6SK7GT              | 6SK7                | 12A6*               | 12V6GT                 | 12GB6               | 12GW6/12DQ6B           |
| 6SK7GT/G            | 6SK7                | 12A6C*              | 12V6GT                 | 12GB7               | 12GW6/12DQ6B           |
| 6SN7GT              | 6SN7GTB             | 12A6GT              | 12V6GT                 | 12GN7               | 12HG7/12GN7A           |
| 6SN7GTA             | 6SN7GTB             | 12AC6               | 12BL6                  | 12GN7A              | 12HG7/12GN7A           |
| 6SQ7G               | 6SQ7                | 12AC10              | 12AC10A                | 12GT5A              | 12GT5                  |
| 6SQ7GT              | 6SQ7                | 12AE6               | 12AE6A                 | 12GW6               | 12GW6/12DQ6B           |
| 6SQ7GT/G            | 6SQ7                | 12AF3               | 12AF3/12BR3/<br>12RK19 | 12H31               | 12BE6                  |
| 6SR7G               | 6SR7                | 12AT7               | 12AT7/ECC81            | 12HG7               | 12HG7/12GN7A           |
| 6SR7GT              | 6SR7                | 12AU6A              | 12AU6                  | 12J5                | 12J5GT                 |
| 6T4                 | 6AF4A               | 12AU7               | 12AU7A/ECC82           | 12JB6               | 12JB6A                 |
| 6T5                 | 6U5                 | 12AU7A              | 12AU7A/ECC82           | 12JN6A              | 12JN6                  |
| 6T8                 | 6T8A                | 12AV5GT             | 12AV5GA                | 12JT6               | 12JT6A                 |
| 6U5G                | 6U5                 | 12AX4GT             | 12AX4GTB               | 12KL8 *             | 12EQ7                  |
| 6U8                 | 6U8A/6KD8           | 12AX4GTA            | 12AX4GTB               | 12RK19              | 12AF3/12BR3/<br>12RK19 |
| 6U8A                | 6U8A/6KD8           | 12AX7               | 12AX7A/ECC83           | 12RLL3 *            | 12AV7                  |
| 6U9                 | 6U9/ECF201          | 12AX7A              | 12AX7A/ECC83           | 12SA7G              | 12SA7                  |
| 6V6G                | 6V6, 6V6GT          | 12AY3               | 12AY3A                 | 12SA7GT             | 12SA7                  |
| 6V6GT               | 6V6, 6V6GT          | 12AZ7               | 12AZ7A                 | 12SA7GT/G           | 12SA7                  |
| 6V6GT/G             | 6V6, 6V6GT          | 12B4                | 12B4A                  | 12SF7GT             | 12SF7                  |
| 6W4GTA              | 6W4GT               | 12BB14              | 13GB5/XL500            | 12SG7GT             | 12SG7                  |
| 6W6                 | 6W6GT               | 12BC22              | 12AV6                  | 12SH7GT             | 12SH7                  |
| 6X5G                | 6X5GT               | 12BC32              | 12AT6                  | 12SJ7GT             | 12SJ7                  |
| 6X5GT/G             | 6X5GT               | 12BD5               | 12BA6                  | 12SK7G              | 12SK7                  |
| 6X8                 | 6X8A                | 12BE3A              | 12BE3                  | 12SK7GT             | 12SK7                  |
| 6X9                 | 6X9/ECF200          | 12BE6A              | 12BE6                  | 12SK7GT/G           | 12SK7                  |
| 6Y6G                | 6Y6GA/6Y6G          | 12BH7               | 12BH7A                 | 12SN7GT             | 12SN7GTA               |
| 6Y6GA               | 6Y6GA/6Y6G          | 12BQ6GA             | 12BQ6GTB/12CU6         | 12SQ7G              | 12SQ7                  |
| 6Y6GT               | 6Y6GA/6Y6G          | 12BQ6GT             | 12BQ6GTB/12CU6         | 12SQ7GT             | 12SQ7                  |
| 6Y9                 | 6Y9/EFL201          | 12BQ6GTA            | 12BQ6GTB/12CU6         | 12SQ7GT/G           | 12SQ7                  |
| 6Z4                 | 84/6Z4              | 12BQ6GTB            | 12BQ6GTB/12CU6         | 13DE                | 6SN7GTB                |
| 6Z10                | 6Z10/6J10           | 12BR3               | 12AF3/12BR3/<br>12RK19 | 13EM7               | 13EM7/15EA7            |
| 6Z31                | 6X4                 | 12BR7A              | 12BR7                  | 13FM7               | 13FM7/15FM7            |
| 7D11                | 6CA7/EL34           | 12BS3               | 12BS3A/12DW4A          | 13FR7               | 13FD7                  |
| 7HG8                | 7HG8/PCF86          | 12BU6               | 12BF6                  | 13GB5               | 13GB5/XL500            |
| 8A8                 | 9A8/PCF80           | 12BV7               | 12BY7A/12BV7/<br>12DQ7 | 13GF7               | 13GF7A                 |
| 8AU8                | 8AW8A               | 12BY7               | 12BY7A/12BV7/<br>12DQ7 | 13J10               | 13Z10/13J10            |
| 8AW8                | 8AW8A               | 12C5                | 12CU5/12C5             | 13Z10               | 13Z10/13J10            |
| 8BH8                | 8AU8                | 12CK3               | 12CL3                  | 14GT8A              | 14GT8                  |
| 8BQ11 *             | 8AR11               | 12CU5               | 12CU5/12C5             | 14JG8               | 14GT8                  |
| 8CG7                | 8FQ7/8CG7           | 12CU6               | 12BQ6GTB/12CU6         | 15BD11              | 15BD11A                |
| 8CW5                | 8CW5/XL86           | 12CX6               | 12BL6                  | 15CW5               | 15CW5/PL84             |
| 8CW5A               | 8CW5/XL86           | 12D4A               | 12D4                   | 15EA7               | 13EM7/15EA7            |
| 8EB8                | 8GN8/8EB8           | 12DM4               | 12AX4GTB               | 15EW7               | 13DE7                  |
| 8FQ7                | 8FQ7/8CG7           | 12DM4A              | 12AX4GTB               | 15FM7               | 13FM7/15FM7            |
| 8FJ7                | 8GJ7/PCF801         | 12DQ6               | 12GW6/12DQ6B           | 15KY8               | 15KY8A                 |
| 8GN8                | 8GN8/8EB8           | 12DQ6A              | 12GW6/12DQ6B           | 15KY8/<br>17LD8     | 15KY8A                 |
| 8JE8                | 8GN8/8EB8           | 12DQ6B              | 12GW6/12DQ6B           | 16AQ3               | 16AQ3/XY88             |
| 8JU8                | 8JU8A               | 12DQ6B/<br>12GW6    | 12GW6/12DQ6B           | 16LU8               | 16LU8A                 |
| 8KS8                | 8AW8A               | 12DQ7               | 12BY7A/12BV7/<br>12DQ7 | 17AB10              | 17AB10/17X10           |
| 9A8                 | 9A8/PCF80           | 12DS7A              | 12DS7                  | 17AX4GT             | 17DM4A, 17AX4GT        |
| 9EA8                | 9U8A                | 12DW4A              | 12BS3A/12DW4A          | 17AY3               | 17AY3A                 |
| 9GH8                | 9GH8A               | 12E13               | 6CA7/EL34              | 17BE3               | 17BE3/17BZ3            |
| 9GV8                | 9GV8/XCL85          | 12E5                | 12FX5                  | 17BF11A             | 17BF11                 |
| 9LA6 *              | 9KX6                | 12EH5               | 12CA5                  | 17BH3A              | 17BH3                  |
| 9RAL1               | 10DE7               | 12DS7A              | 12DS7                  | 17BQ6GTB            | 17GW6/17DQ6B           |
| 9U8                 | 9U8A                | 12DW4A              | 12BS3A/12DW4A          | 17BR3               | 17BR3/17RK19           |
| 10CW5               | 10CW5/LL86          | 12E13               | 6CA7/EL34              | 17BS3A              | 17BS3A/17DW4           |
| 10D2                | 12AL5               | 12E5                | 12FX5                  | 17BZ3               | 17BE3/17BZ3            |
| 10DX8               | 10DX8/LCL84         | 12EH5               | 12CA5                  | 17C5                | 17CU5/17C5             |
| 10EB8               | 10GN8               |                     |                        |                     |                        |
| 10GF7               | 10GF7A              |                     |                        |                     |                        |

\* Replacement type may not work in some circuits.  
 \* Use replacement type in parallel heater circuits only.

| Type to be Replaced | Replace by RCA Type |
|---------------------|---------------------|
| 17C9A               | 17C9                |
| 17CL3               | 17BS3A/17DW4B       |
| 17CU5               | 17CU5/17C5          |
| 17CQ4               | 17DE4               |
| 17D4                | 17DM4A              |
| 17D4A               | 17DM4A              |
| 17DL8               | 15KY8A              |
| 17DM4               | 17DM4A              |
| 17DQ4               | 17DM4A              |
| 17DQ6               | 17GW6/17DQ6B        |
| 17DQ6A              | 17GW6/17DQ6B        |
| 17DQ6B              | 17GW6/17DQ6B        |
| 17DQ6B/17GW6        | 17GW6/17DQ6B        |
| 17DW4A              | 17BS3A/17DW4A       |
| 17EW8               | 17EW8/HCC85         |
| 17GB3               | 17GW6/17DQ6B        |
| 17GJ5               | 17GJ5A              |
| 17GT5               | 17GT5A              |
| 17GW6               | 17GW6/17DQ6B        |
| 17JB6               | 17JB6A              |
| 17JG6               | 17JG6A              |
| 17JM6               | 17JM6A              |
| 17JN6A              | 17JN6               |
| 17JT6               | 17JT6A              |
| 17JZ8A              | 17JZ8               |
| 17KV6               | 17KV6A              |
| 17LD8               | 15KY8A              |
| 17RK19              | 17BR3/17RK19        |
| 17X10               | 17AB10/17X10        |
| 17Z3                | 17Z3/PY81           |
| 18FW6               | 18FW6A              |
| 18FX6               | 18FX6A              |
| 18FY6               | 18FY6A              |
| 18GB5               | 18GB5/LL500         |
| 18GD6               | 18GD6A              |
| 18GV8               | 18GV8/PCL85         |
| 19AU4               | 19AU4GT             |
| 19AU4GT             | 19AU4GT             |
| 19CL8A              | 19JN8/19CL8A        |
| 19EA8A              | 19EA8               |
| 19JN8               | 19JN8/19CL8A        |
| 19MR9               | 18GD6A              |
| 19MR19              | 18FW6A              |
| 19TA8               | 19T8                |
| 20AQ3               | 20AQ3/LY88          |
| 21EX6 *             | 25C6GB              |
| 21HB5               | 21HB5A              |
| 21JS6               | 23JS6A              |
| 21JS6A              | 23JS6A              |
| 22BH3               | 22BH3A              |
| 22JF6               | 22KM6               |
| 22JG6               | 22JG6A              |
| 23JS6               | 23JS6A              |
| 24JE6               | 24LQ6/24JE6C        |
| 24JE6A              | 24LQ6/24JE6C        |
| 24JE6B              | 24LQ6/24JE6C        |
| 24JE6C              | 24LQ6/24JE6C        |
| 25AV5GT             | 25AV5GA             |
| 25BQ6GA             | 25BQ6GT/25CU6       |
| 25BQ6GT             | 25BQ6GT/25CU6       |
| 25BQ6GTB            | 25BQ6GT/25CU6       |
| 25CA5               | 25C5                |
| 25CD6G              | 25CD6GB             |
| 25CD6GA             | 25CD6GB             |

| Type to be Replaced | Replace by RCA Type |
|---------------------|---------------------|
| 25CU6               | 25BQ6GT/25CU6       |
| 25DN6               | 25CD6GB             |
| 25E5                | 25E5/PL36           |
| 25EC6               | 25CD6GB             |
| 25F5                | 25F5A               |
| 25L6                | 25L6GT/25W6GT       |
| 25L6G               | 25L6GT/25W6GT       |
| 25L6GT/G            | 25L6GT/25W6GT       |
| 25W6GT              | 25L6GT/25W6GT       |
| 25Z6                | 25Z6GT              |
| 25Z6GT/G            | 25Z6GT              |
| 27GB5               | 27GB5/PL50          |
| 29KQ6               | 29KQ6/PL521         |
| 30C1                | 9A8/PCF80           |
| 30P4                | 25E5/PL36           |
| 30P18               | 15CW5/PL84          |
| 30P19               | 25E5/PL36           |
| 30PL12              | 16A8/PCL82          |
| 30PL13              | 16GK6               |
| 30PL14              | 16GK6               |
| 31JS6               | 31JS6C              |
| 31JS6A              | 31JS6C              |
| 31JS6B              | 31JS6C              |
| 32ET5               | 32ET5A              |
| 33GY7               | 33GY7A              |
| 34GD5               | 34GD5A              |
| 35C5A               | 35C5                |
| 35EH5A              | 35EH5               |
| 35L6G               | 35L6GT              |
| 35L6GT/G            | 35L6GT              |
| 35W4A               | 35W4                |
| 35Z5                | 35Z5GT              |
| 35Z5G               | 35Z5GT              |
| 36AM3               | 36AM3B              |
| 36AM3A              | 36AM3B              |
| 36KD6               | 36KD6/40KD6         |
| 40KD6               | 36KD6/40KD6         |
| 40KG6A              | 40KG6A/PL509        |
| 41*                 | 42                  |
| 42EC4A              | 42EC4A/PY500        |
| 48A8                | 50BM8/UCL82         |
| 50BM8               | 50BM8/UCL82         |
| 50CA5               | 50EH5               |
| 50EH5A              | 50EH5               |
| 50GY7               | 50GY7A              |
| 50HC6               | 50HK6               |
| 50L6G               | 50L6GT              |
| 50Y6G               | 50Y6GT              |
| 50Y6GT/G            | 50Y6GT              |
| 52KU                | 5AR4/GZ34,5V4G      |
| 53KU                | 5AR4/GZ34,5V4G      |
| 54KU                | 5AR4/GZ34,5V4G      |
| 77                  | 6C6                 |
| 117P7GT             | 117N7GT             |
| 83                  | 5Z3                 |
| 83V                 | 80                  |
| 3107                | 5V4G                |
| 4707                | 6X4                 |
| 5881                | 6L6GC               |
| 7024                | 12AX7A/ECC83        |
| 7025A               | 7025                |
| 7027                | 7027A               |
| 7189A               | 7189                |
| 7581                | 7581A               |
| 7591                | 7591A               |

| Type to be Replaced | Replace by RCA Type |
|---------------------|---------------------|
| 8016                | 1G3GT/1B3GT         |
| A863                | 6J7                 |
| AD17                | 1S5                 |
| B36                 | 12SN7GTA            |
| B65                 | 6SN7GTB             |
| B152                | 12AT7/ECC81         |
| B309                | 12AT7/ECC81         |
| B329                | 12AU7A/ECC82        |
| B339                | 12AX7A/ECC83        |
| B719                | 6AQ8/ECC85          |
| B739                | 12AT7/ECC81         |
| B749                | 12AU7A/ECC81        |
| B759                | 12AX7A/ECC83        |
| BPM04               | 6AQ5A               |
| CSF80               | 4BL8/CXF80          |
| D2M9                | 6AL5                |
| D63                 | 6AL5                |
| O152                | 6AL5                |
| DAF91               | 1S5                 |
| DAF92               | 1U5                 |
| DF33                | 1N5GT               |
| DF91                | 1T4                 |
| DF904               | 1U4                 |
| DH63                | 6Q7                 |
| DH77                | 6AT6                |
| DH719               | 6AK8/EABC80         |
| DK91                | 1R5                 |
| DL33                | 3Q5GT               |
| DL92                | 3S4                 |
| DL94                | 3V4                 |
| DL95                | 3Q4                 |
| DL012               | 6T8A                |
| DP61                | 6AK5/EF95           |
| DY30                | 1G3GT/1B3GT         |
| DY80                | 1X2C                |
| EB1CC               | 12AT7/ECC81         |
| EB2CC               | 12AU7A/ECC82        |
| EB3CC               | 12AX7A/ECC83        |
| EA91                | 6AL5                |
| EABC80              | 6AK8/EABC80         |
| EB34*               | 6H6                 |
| EB91                | 6AL5                |
| EBC90               | 6AT6                |
| EBC91               | 6AT6                |
| EC88                | 6DL4/EC88           |
| EC90                | 6C4                 |
| EC92                | 6AB4                |
| EC94                | 6AF4A               |
| EC95                | 6ER5                |
| EC97                | 6FY5/EC97           |
| EC900               | 6HM5/6HA5           |
| ECC32*              | 6SN7GTB             |
| ECC35*              | 6SL7GT              |
| ECC81               | 12AT7/ECC81         |
| ECC82               | 12AU7A/ECC82        |
| ECC83               | 12AX7A/ECC83        |
| ECC85               | 6AQ8/ECC85          |
| ECC88               | 6ES8/ECC189         |
| ECC91               | 6J6A                |
| ECC180              | 6BQ7A/6BZ7/6BS8     |
| ECC186              | 12AU7A/ECC82        |
| ECC189              | 6ES8/ECC189         |
| ECC801              | 12AT7/ECC81         |
| ECC802              | 12AU7A/ECC82        |

- \* Replacement type may not work in some circuits.  
 \* Use replacement type in parallel heater circuits only.

| Type to be Replaced | Replace by RCA Type    |
|---------------------|------------------------|
| ECC803              | 12AX7A/ECC83           |
| ECF80               | 6BL8/ECF80             |
| ECF82               | 6GH8A                  |
| ECF86               | 6GH8A                  |
| ECF200              | 6X9/ECF200             |
| ECF201              | 6U9/ECF201             |
| ECF801              | 6GJ7/ECF801            |
| ECF802              | 6JW8/ECF802            |
| ECH42               | 6C10                   |
| ECL82               | 6BM8/ECL82             |
| ECL84               | 6DX8/ECL84             |
| ECL85               | 6GV8/ECL85             |
| ECL86               | 6GW8/ECL86             |
| ECL180              | 6AQ7A/6BZ7/<br>6BS8    |
| EF37*               | 6J7                    |
| EF80                | 6B8Y                   |
| EF93                | 6AU6A                  |
| EF94                | 6AU6A                  |
| EF95                | 6AK5/EF95              |
| EF96                | 6BC5/6CE5              |
| EF183               | 6EH7/EF183             |
| EF184               | 6EJ7/EF184             |
| EF190               | 6B26                   |
| EF811               | 6EH7/EF183             |
| EF814               | 6EJ7/EF184             |
| EF905               | 6AK5/EF95              |
| EFL201              | 6Y9/EFL201             |
| EH90                | 6CS6                   |
| EK90                | 6BE6                   |
| EL22                | 7C5                    |
| EL34                | 6CA7/EL34              |
| EL84                | 6BQ5/EL84              |
| EL86                | 6CW5/EL86              |
| EL90                | 6AQ5A                  |
| EL95                | 6DL5/EL95              |
| EL180               | 12BY7A/12BV7/<br>12DQ7 |
| EL500               | 6GB5/EL500             |
| ELL80               | 6HU8/ELL80             |
| EM35                | 6U5                    |
| EM84                | 6F6G/EM84              |
| EM87                | 6HU6/EM87              |
| EY88                | 6AL3/EY88              |
| EY500               | 6EC4A/EY500            |
| EZ4                 | 6CA4                   |
| EZ35                | 6X5GT                  |
| EAB1                | 6CA4                   |
| EZ90                | 6X4                    |
| EZ900               | 6X4                    |
| GZ30                | 5Y3GT                  |
| GZ32                | 5AR4/GZ34,5V4G         |
| GZ34                | 5AR4/GZ34,5V4G         |
| GZ37                | 5AR4/GZ34,5V4G         |
| H63                 | 6F5                    |
| HAA91               | 12AL5                  |
| HBC90               | 12AT6                  |
| HBC91               | 12AT6                  |
| HCC85               | 17EW8/HCC85            |
| HD94                | 6BQ6TB/6CU6            |
| HD96                | 25BQ6GTB/25CU6         |
| HF93                | 12AU6                  |
| HF94                | 12AU6                  |
| HK90                | 12BE6                  |
| HL92                | 50C5                   |

| Type to be Replaced | Replace by RCA Type |
|---------------------|---------------------|
| HM04                | 6BE6                |
| HY90                | 35W4                |
| HZ90                | 12X4                |
| KT-32               | 25L6GT/25W6GT       |
| KT-63               | 6F6                 |
| KT66                | 6L6GC               |
| KT71                | 50L6GT              |
| KT77                | 6CA7/EL34           |
| KT81                | 7C5                 |
| KT88                | 6CA7/EL34           |
| KTW63               | 6K7                 |
| KT263               | 6J7                 |
| L63                 | 6C5                 |
| L63B                | 6C5                 |
| L77                 | 6C4                 |
| LC900               | 3HM5/3HA5           |
| LCF201              | 5U9/LCF201          |
| LCF801              | 5GJ7/LCF801         |
| LCF802              | 6LX8/LCF802         |
| LCL82               | 11BM8               |
| LCL84               | 10DX8/LCL84         |
| LCL85               | 10GV8/LCL85         |
| LF183               | 4EH7/LF183          |
| LF184               | 4EJ7/LF184          |
| LL86                | 10CW5/LL86          |
| LL500               | 18GB5/LL500         |
| LN119               | 50BM8/UCL82         |
| LY88                | 20AQ3/LY88          |
| LZ319               | 9A8/PCF80           |
| LZ329               | 9A8/PCF80           |
| M8080               | 6C4                 |
| M8081               | 6J6A                |
| M8101               | 6BA6/EF93           |
| M8136               | 12AU7A/ECC82        |
| M8137               | 12AX7A/ECC83        |
| M8162               | 12AT7/ECC81         |
| M8245               | 6AQ5A               |
| M15                 | 3Q5GT               |
| N16                 | 3Q5GT               |
| N17                 | 3S4                 |
| N18                 | 3Q4                 |
| N19                 | 3V4                 |
| N63                 | 6F6                 |
| N148                | 7C5                 |
| N308                | 25E5/PL36           |
| N369                | 16A8/PCL82          |
| N709                | 6BQ5/EL84           |
| N727                | 6AQ5A               |
| OBC3                | 12SQ7               |
| OSW3104             | 6SA7                |
| OSW3105             | 6SQ7                |
| OSW3106             | 6V6                 |
| OSW3110             | 6E5                 |
| OSW3111             | 6SK7                |
| PC95                | 4GK5                |
| PC900               | 4HA5/PC900          |
| PC18                | 7AU7                |
| PCF80               | 9A8/PCF80           |
| PCF86               | 7HG8/PCF86          |
| PCF801              | 8GJ7/PCF801         |
| PCL82               | 16A8/PCL82          |
| PCL84               | 15DQ8/PCL84         |
| PCL85               | 18GV8/PCL85         |
| PCL800              | 16GK6               |
| PH4                 | 6A8                 |

| Type to be Replaced | Replace by RCA Type |
|---------------------|---------------------|
| PL36                | 25E5/PL36           |
| PL84                | 15CW5/PL84          |
| PL500               | 27GB5/PL500         |
| PL509               | 40KG6A/PL509        |
| PL521               | 29KQ6/PL521         |
| PM04                | 6AU6A               |
| PM05                | 6AK5/EF95           |
| PY81                | 17Z3/PY81           |
| PY83                | 17Z3/PY81           |
| PY88                | 30AE3/PY88          |
| PY500               | 42EC4A/PY500        |
| PY800               | 17Z3/PY81           |
| QA2401              | 6C4                 |
| QA2404              | 6AL5                |
| QA2406              | 12AT7/ECC81         |
| QB309               | 12AT7/ECC81         |
| QL77                | 6C4                 |
| R-19                | 1X2C                |
| R-52                | 5AR4/GZ34,5V4G      |
| RJ2                 | 5Y3GT               |
| T2M05               | 6J6A                |
| U41                 | 1G36TA/1B3GT        |
| U50                 | 5Y3GT               |
| U52                 | 5U4GB               |
| U54                 | 5AR4/GZ34,5V4G      |
| U70                 | 5AR4/GZ34,5V4G      |
| U78                 | 6X4                 |
| U707                | 6X4                 |
| U709                | 6CA4                |
| UCL82               | 50BM8/UCL82         |
| UCL83               | 50BM8/UCL82         |
| UU12                | 6CA4                |
| V153                | 17Z3/PY81           |
| V741                | 6C4                 |
| V5M70               | 6X4                 |
| W17                 | 1T4                 |
| W61                 | 6K7                 |
| W63                 | 6K7                 |
| W727                | 6AU6A               |
| X17                 | 1R5                 |
| X63                 | 6A8                 |
| X64 *               | 6L7                 |
| X77                 | 6BE6                |
| X107                | 18FX6A              |
| X150                | 6C10                |
| X727                | 6BE6                |
| XC900               | 2HA5                |
| XCC82               | 7AU7                |
| XCC189              | 4ES8/XCC189         |
| XCF80               | 4BL8/XCF80          |
| XCL85               | 9GV8/XCL85          |
| XF94                | 3AU6                |
| XF183               | 3EH7/XF183          |
| XF184               | 3EJ7/XF184          |
| XL86                | 8CW5/XL86           |
| XL500               | 13GB5/XL500         |
| XYA-91              | 3AL5                |
| XY88                | 16AQ3/XY88          |
| Y61                 | 6U5                 |
| YC95                | 3ER5                |
| YCL180              | 5BQ7A               |
| YF183               | 4EH7/LF183          |
| YF184               | 4EJ7/LF184          |
| Z14                 | 1N5GT               |
| Z63                 | 6J7                 |

\* Replacement type may not work in some circuits.  
 \* Use replacement type in parallel heater circuits only.

# Replacement Guide—Industrial Receiving Types

## How to Use

The Replacement Guide consists of a series of three columns.

Column 1: Type Designation of Type to be Replaced.

Note: Types are indexed in a special numerical sequence; check the steps below before proceeding!

a. Locate the first numerical field in the type designation. Ignore all letters that come before the first number; read the number to the end, or up to a letter, hyphen or slash. Note the first numerical field underlined in the following examples:

OA2, GQ5G, T66G-GT, E182F, 7866, and 8532/6J4WA.

b. Type designations consisting entirely of letters are listed in alphabetical order at the end of the Guide.

c. Types are ordered in numerical sequence of the first numerical field described in (a).

d. Types with the same first numerical field are then ordered by the next character as follows: end of designation, slash, hyphen, and letter:

E81CC, CC81E, AA91E, E91N.

e. If more than one type in (d) is the end of the type designation, the types are ordered alphabetically by the letter prefixes:

EC71, EF71, EL71.

f. If more than one type in (d) is followed by a slash, hyphen, or letter the types are ordered alphabetically or numerically according to the field following the slash or hyphen or the alphabetical field including the letter.

TQ1/2, QEL1/150, CT1/2500, TD1-100A, QV1-150A, XG1-2500

Column 2: Direct RCA Replacement Type.

RCA types shown in this column are direct replacements for corresponding types to be replaced.

Column 3: Similar RCA Replacement Type.

RCA types shown in this column are not directly interchangeable with the types to be replaced because of differences in mechanical and/or electrical characteristics. For more information as to degree of interchangeability, refer to respective tube data.

Types replaceable only by themselves are not included.

| Type to be Replaced | RCA Replacement |                    | Type to be Replaced | RCA Replacement |                    |
|---------------------|-----------------|--------------------|---------------------|-----------------|--------------------|
|                     | Direct          | Similar            |                     | Direct          | Similar            |
| OA2                 | OA2<br>OA2WA    | OD3<br>OD3A        | OA3A                | OA3A            | OA3<br>OC2         |
| OA2WA               | OA2WA           | OA2<br>OD3<br>OD3A | OB2                 | OB2<br>OB2WA    | OC3<br>OC3A        |
| OA3                 | OA3<br>OA3A     | OC2                | OB2WA               | OB2WA           | OB2<br>OC3<br>OC3A |
| OA3/VR75            | OA3<br>OA3A     | OC2                | OC2                 | OC2             | OA3<br>OA3A        |

| Type to be Replaced | RCA Replacement       |                             | Type to be Replaced | RCA Replacement   |                               |
|---------------------|-----------------------|-----------------------------|---------------------|-------------------|-------------------------------|
|                     | Direct                | Similar                     |                     | Direct            | Similar                       |
| OC3                 | OC3<br>OC3A           | OB2<br>OB2WA                | 6AL5W               | 5726              | 6AL5<br>6663/6AL5             |
| OC3/VR105           | OC3<br>OC3A           | OB2<br>OB2WA                | 6AQ5W               | 6005              | 6AQ5A                         |
| OC3A                | OC3A                  | OB2<br>OB2WA<br>OC3         | 6AS6                | 6AS6<br>5725      |                               |
| OC3W                |                       | OB2<br>OB2WA<br>OC3<br>OC3A | 6AS6W               | 5725              | 6AS6                          |
| OD3                 | OD3<br>OD3A           | OA2<br>OA2WA                | 6AS7G               | 6AS7G<br>6AS7GA   | 6080                          |
| OD3/VR150           | OD3<br>OD3A           | OA2<br>OA2WA                | 6AS7GA              | 6AS7GA            | 6AS7G<br>6080                 |
| OD3A                | OD3A                  | OA2<br>OA2WA<br>OD3         | 6AS7GYB             |                   | 6AS7G<br>6AS7GA<br>6080       |
| OD3W                |                       | OA2<br>OA2WA<br>OD3<br>OD3A | 6AU6WA              | 6AU6WB            | 6AU6A<br>6136                 |
| IF2                 | 1L4                   |                             | 6AU6WB              | 6AU6WB            | 6AU6A<br>6AU6WA<br>6136       |
| IG84                |                       | 884                         | 6BA6W               | 5749              | 6BA6/EF93                     |
| QQEQ2/5             | 6939                  |                             | 6BE6W               |                   | 6BE6<br>5760                  |
| QQV02-6             | 6939                  |                             | 6DJ8                | 6DJ8/ECC88        |                               |
| 2C51                | 5670                  |                             | 6J4WA               |                   | 6J4                           |
| 2D21                | 2D21<br>5727          |                             | 6J4WB               |                   | 6J4                           |
| 2D21W               |                       | 2D21<br>5721                | 6J6W                |                   | 6J6A<br>5964                  |
| QE03/10             | 5763                  |                             | 6J6WA               |                   | 6J6A<br>5964                  |
| QV03-12             | 5763                  |                             | 6L6Y                |                   | 6L6<br>6L6GC                  |
| GQ5G                | 884                   |                             | 6SJ7WGT             |                   | 6SJ7<br>5693                  |
| 5R4GY               | 5R4GYB<br>2076/5R4GYB |                             | 6SJ7Y               |                   | 6SJ7<br>5693                  |
| 5R4GYA              | 5R4GYB<br>2076/5R4GYB |                             | 6SL7WGT             |                   | 6SL7GT<br>5691                |
| 5R4GYB              | 5R4GYB<br>2076/5R4GYB |                             | 6SN7GTY             |                   | 6SN7GTB<br>5692               |
| WT6                 | 6L6                   | 6L6GC                       | 6V6Y                |                   | 6V6<br>6V6GT                  |
| 6AC7W               |                       | 6AC7                        | 6V6GTY              |                   | 6V6<br>6V6GT                  |
| 6AC7WA              |                       | 6AC7                        | 6X4                 | 6202<br>6X4W      |                               |
| 6AC7Y               |                       | 6AC7                        | 12AT7WA             | 12AT7W<br>12AT7WB | 6201<br>6679/12AT7            |
| 6AG5WA              |                       | 6AG5                        | 12AT7WB             | 12AT7WB           | 12AT7WA<br>6201<br>6679/12AT7 |
| 6AG7Y               |                       | 6AG7                        | 12AU7WA             |                   | 6680/12AU7A<br>12AU7A/ECC82   |
| 6AH6WA              |                       | 6AH6                        | 12AX7A              | 6681/<br>12AX7A   | 12AX7A/ECC83                  |
| 6AK5W               | 5654                  | 6AK5/EF95                   |                     |                   |                               |

| Type to be Replaced | RCA Replacement    |                           | Type to be Replaced | RCA Replacement |               |
|---------------------|--------------------|---------------------------|---------------------|-----------------|---------------|
|                     | Direct             | Similar                   |                     | Direct          | Similar       |
| 12AS7Y              |                    | 12AS7                     | STV108/30           | OB2<br>OB2WA    | OC3<br>OC3A   |
| 12SG7Y              |                    | 12SG7                     | 108C1               | OB2<br>OB2WA    | OC3<br>OC3A   |
| 12SK7Y              |                    | 12SK7                     | WTT-114             | OZ4A/OZ4        |               |
| 14GT                | 7724/14GT8         | 14GT8                     | WTT-115             |                 | 117N7GT       |
| RL21                | 2D21<br>5727       |                           | WTT-122             |                 | 6SJ7<br>5693  |
| 21                  |                    | 872A                      | WTT-123             |                 | 6V6<br>6V6GTA |
| KD24                | OC3<br>OC3A        | OB2<br>OB2WA              | WTT-124             |                 | 6AT6          |
| KD25                | OD3<br>OD3A        | OA2<br>OA2WA              | WTT-125             |                 | 6N7<br>6N7GT  |
| 25B6G               | 5824               |                           | WTT-126             |                 | 50B5          |
| EN32                | 2050<br>2050A      |                           | WTT-128             |                 | 6K8           |
| NE48                | 991                |                           | WTT-129             |                 | 6J5<br>6J5GT  |
| HD51                | OA2<br>OA2WA       | OD3<br>OD3A               | WTT-131             |                 | 6C6           |
| HD52                | OB2<br>OB2WA       | OC3<br>OC3A               | WTT-132             | OA4G            |               |
| T66G-GT             |                    | 884                       | WTT-135             |                 | 5U4G<br>5U4GB |
| TY66G               |                    | 884                       | VT-138              | 1629            |               |
| DY70                | 5642               |                           | VT-139              | OD3<br>OD3A     | OA2<br>OA2WA  |
| EC70                | 5718               |                           | VR-150              | OD3<br>OD3A     | OA2<br>OA2WA  |
| ECC70               | 6021               |                           | QS150/40            | OD3<br>OD3A     | OA2<br>OA2WA  |
| EC71                | 5718               |                           | 150C1               | OA2<br>OA2WA    | OD3<br>OD3A   |
| VR75                | OA3<br>OA3A        | OC2                       | 150C2               | OA2<br>OA2WA    | OD3<br>OD3A   |
| E81CC               | 6201               |                           | 150C3               | OD3<br>OD3A     | OA2<br>OA2WA  |
| CC81E               | 12A77WA<br>12A77WB | 6679/12A77<br>12A77/ECC81 | E182F               | 5847/404A       |               |
| ECC88               | 6DJ8/ECC88         |                           | VT202               | 9002            |               |
| E88CC               | 6922/E88CC         |                           | VT203               | 9003            |               |
| DCC90               | 3A5                |                           | WT210-0001          | 2D21<br>5727    |               |
| ABC91               | 12A6               |                           | WT210-0003          | 884             |               |
| EN91                | 2D21<br>5727       |                           | WT210-0004          | 2050<br>2050A   |               |
| E91AA               | 5726               | 6AL5<br>6663/6AL5         | WT210-0006          |                 | 6H6           |
| AA91E               | 5726               | 6AL5<br>6663/6AL5         | WT210-0007          |                 | 6L6<br>6L6GC  |
| E91N                | 5727               | 2D21                      | WT210-0011          | OC3<br>OC3A     | OB2<br>OB2WA  |
| DF92                | 1L4                |                           | WT210-0012          | 80              |               |
| EN92                | 5696<br>5696A      |                           | WT210-0013          | 5Z3             |               |
| E95F                | 5654               | 6AK5/EF95                 | WT210-0018          | OD3<br>OD3A     | OA2<br>OA2WA  |
| WTT-100             | 6X4W               | 6X4                       |                     |                 |               |
| WTT-102             |                    | 5Y3GT                     |                     |                 |               |
| WTT-103             |                    | 6H6                       |                     |                 |               |
| VR105               | OC3<br>OC3A        | OB2<br>OB2WA              |                     |                 |               |

| Type to be Replaced | RCA Replacement       |                       | Type to be Replaced | RCA Replacement   |                             |
|---------------------|-----------------------|-----------------------|---------------------|-------------------|-----------------------------|
|                     | Direct                | Similar               |                     | Direct            | Similar                     |
| WT210-0019          | 83                    |                       | WT308               |                   | 6X5GT                       |
| WT210-0021          |                       | 6X5GT                 | 310A                |                   | 6C6                         |
| WT210-0028          |                       | 3Q5GT                 | 310B                |                   | 1620                        |
| WT210-0029          |                       | 6C5                   | 328A                |                   | 6C6                         |
| WT210-0040          | 6X4W                  | 6X4                   | 348A                |                   | 1620                        |
| WT210-0042          |                       | 5Y3GT                 | 349A                |                   | 6K6GT                       |
| WT210-0048          |                       | 5U4G<br>5U4GB         | 351A                |                   | 6X5GT                       |
| WT210-0060          |                       | OZ4A/OZ4              | WT389               |                   | 3Q5GT                       |
| WT210-0061          |                       | 117N7GT               | WT390               |                   | 6C5                         |
| WT210-0077          | 5727                  | 2D21                  | 395A                |                   | 5823                        |
| WT210-0081          |                       | 6SJ7<br>5697          | 403A                | 6AK5/EF95<br>5654 |                             |
| WT210-0082          |                       | 6V6<br>6V6GTA         | 403B                | 6AK5/EF95<br>5654 |                             |
| WT210-0084          |                       | 6N7<br>6N7GT          | 404A                | 5847/404A         |                             |
| WT210-0085          |                       | 50B5                  | 417A                | 5842/417A         |                             |
| WT210-0087          |                       | 6K8                   | 421A                |                   | 6AS7G<br>6080               |
| WT210-0088          |                       | 6J5<br>6J5GT          | 423A                |                   | 5651A                       |
| WT210-0090          |                       | 6C6                   | 502A                | 2050<br>2050A     |                             |
| WT210-0091          |                       | OZ4A/OZ4              | WT606               | 2D21<br>5727      |                             |
| WT210-0108          | 6AS7G<br>6080         |                       | CV618               |                   | 83                          |
| CV216               | OD3<br>OD3A           | OA2<br>OA2WA          | 630                 | 2050<br>2050A     |                             |
| 217A                |                       | 80                    | 630A                | 2050<br>2050A     |                             |
| ECC230              | 6080                  | 6AS7G                 | CV752               | OA4G              |                             |
| 245                 | 884                   |                       | CV797               | 2D21<br>5727      |                             |
| WT246               | 2050<br>2050A         |                       | ECC801              | 6201              |                             |
| WT261               |                       | 6H6                   | ECC802              |                   | 6680/12AU7A<br>12AU7A/ECC82 |
| WT261A              |                       | 6H6                   | ECC802S             |                   | 6680/12AU7A<br>12AU7A/ECC82 |
| WT269               | OC3<br>OC3A           | OB2<br>OB2WA          | S856                | OA2<br>OA2WA      | OD3<br>OD3A                 |
| WT270               |                       | 80                    | S860                | OB2<br>OB2WA      | OC3<br>OC3A                 |
| WT270X              |                       | 5Z3                   | 885                 |                   | 884                         |
| 274A                |                       | 5R4GYB<br>2076/5R4GYB | Z900T               | 5823              |                             |
| 274B                | 5R4GYB<br>2076/5R4GYB |                       | EAA901              | 5726              | 6AL5<br>6663/6AL5           |
| CR275/866A/<br>3B28 | 886A                  |                       | EAA901S             | 5726              | 6AL5<br>6663/6AL5           |
| WT294               | OD3<br>OD3A           | OA2<br>OA2WA          | EF905               | 5654              | 6AK5/EF95                   |
| Z300T               | OA4G                  |                       | 954                 |                   | 9001                        |
| WT301               | 83                    |                       | 956                 |                   | 9003                        |
| 301A                |                       | 83                    | 958A                |                   | 9002                        |

| Type to be Replaced | Direct                    | RCA Replacement Similar          | Type to be Replaced | Direct             | RCA Replacement Similar          |
|---------------------|---------------------------|----------------------------------|---------------------|--------------------|----------------------------------|
| QS1205              | OA3<br>OA3A               | OC2                              | CV2573              | 5651A              |                                  |
| QS1206              | OC3<br>OC3A               | OB2<br>OB2WA                     | CV2642              | 5842/417A          |                                  |
| QS1207              | OA2<br>OA2WA              | OD3<br>OD3A                      | CV2742              | 1L4                |                                  |
| QS1208              | OB2<br>OB2WA              | OC3<br>OC3A                      | CV2795              | 1L4                |                                  |
| QS1210              | OA2WA                     | OA2<br>OD3<br>OD3A               | CV2876              | 5727               |                                  |
| QS1211              | OB2WA                     | OB2<br>OC3<br>OC3A               | CV2984              | 6080               | 6AS7G                            |
| 1217                |                           | 5915                             | CV3508              | 6201               | 12AT7WA<br>12AT7WB<br>6679/12AT7 |
| 1266                |                           | 5823                             | CV3512              | 5696<br>5696A      |                                  |
| 1267                |                           | 2A3                              | CV3789              | 5842/417A          |                                  |
| RL1267              | OA4G                      |                                  | CV3798              | OA3<br>OA3A        | OC2                              |
| 1603                |                           | 1620                             | CV3928              | 5840               |                                  |
| 1631                |                           | 6L6<br>6L6GC                     | CV3930              | 5718               |                                  |
| CV1758              | 1L4                       |                                  | CV3986              | 6021               |                                  |
| CV1832              | OA2<br>OA2WA              | OD3<br>OD3A                      | CV4009              | 5749               | 6BA6/EF93                        |
| CV1834              | 6AS7G<br>6080             |                                  | CV4011              | 5725               | 6AS6                             |
| 1852                |                           | 6AC7                             | CV4017              | 5751               |                                  |
| E1955               | 2D21<br>5727              |                                  | CV4018              | 5727               |                                  |
| CV1992              | OA4G                      |                                  | CV4023              | 6AU6WB             | 6AU6A                            |
| 2050                | 2050A                     |                                  | CV4024              | 12AT7WA<br>12AT7WB | 6679/12AT7                       |
| 2050A               |                           | 2050                             | CV4025              | 5726               | 6AL5<br>6663/6AL5                |
| 2051                | 2050<br>2050A             |                                  | CV4028              | OB2WA              | OB2<br>OC3<br>OC3A               |
| 2057/6H6            |                           | 6H6                              | CV4039              | 5763               |                                  |
| 2076/5R4GYB         | 2076/<br>5R4GYB<br>5R4GYB |                                  | CV4048              | 5651A              |                                  |
| 2081/6AW8A          | 2081/6AW8A                | 6AW8A                            | CV4100              | OA2WA              | OA2<br>OD3<br>OD3A               |
| 2082/12AY7          |                           | 12AY7                            | CV4101              | OB2WA              | OB2<br>OC3<br>OC3A               |
| CV2129              | 5763                      |                                  | ASG5121             | 2D21<br>5727       |                                  |
| CV2240              |                           | 3B4WA                            | CV5122              | 5823               |                                  |
| CV2241              | 5642                      |                                  | CV5186              | 5651A              |                                  |
| QS2404              | 5726                      |                                  | AG5210              | OB2<br>OB2WA       | OC3<br>OC3A                      |
| QS2406              | 6201                      | 12AT7WA<br>12AT7WB<br>6679/12AT7 | AG5211              | OA2<br>OA2WA       | OD3<br>OD3A                      |
| CV2466              | 6939                      |                                  | CV5212              | 6201               | 12AT7WA<br>12AT7WB<br>6679/12AT7 |
| CV2492              | 6922/E88CC                |                                  | 5590/401B           |                    | 5654<br>6AK5/EF95                |
| CV2522              | 6AS6<br>5725              |                                  | 5591/403B           |                    | 5654<br>6AK5/EF95                |



| Type to be Replaced | Direct        | RCA Replacement Similar              | Type to be Replaced | Direct | RCA Replacement Similar              |
|---------------------|---------------|--------------------------------------|---------------------|--------|--------------------------------------|
| 5651                | 5651A         |                                      | 6005/6AQ5W/<br>6095 |        | 6005<br>6AQ5A                        |
| 5651WA              |               | 5651A                                | 6058                |        | 6AL5<br>5726<br>6663/6AL5            |
| 5654                | 5654          | 6AK5/EF95                            | 6060                |        | 6201                                 |
| 5654/6AK5W          |               | 6AK5/EF95                            | 6062                |        | 5763                                 |
| 5659                |               | 12A6                                 | 6067                |        | 12AU7A/ECC82<br>5814A<br>6680/12AU7A |
| 5661                |               | 12SK7                                | 6072A               |        | 6072                                 |
| 5663                | 5663          | 5696<br>5696A                        | 6073                | 0A2WA  | 0A2<br>0D3<br>0D3A                   |
| 5670WA              |               | 5670                                 | 6073/0A2            | 0A2WA  | 0A2<br>0D3<br>0D3A                   |
| 5693                | 5693          | 6SJ7                                 | 6074                | 0B2WA  | 0B2<br>0C3<br>0C3A                   |
| 5696                | 5696<br>5696A |                                      | 6074/0B2            | 0B2WA  | 0B2<br>0C3<br>0C3A                   |
| 5696A               | 5696A         | 5696                                 | 6080                | 6080   | 6AS7G                                |
| 5718A               |               | 5718                                 | 6080WA              |        | 6080<br>6AS7G                        |
| 5725                |               | 6AS6                                 | 6085                |        | 5692                                 |
| 5725/6AS6W          | 5725          | 6AS6                                 | 6094                |        | 6005<br>6AQ5A                        |
| 5726/6AL5W          | 5726          | 6AL5<br>6663/6AL5                    | 6095                |        | 6005<br>6AQ5A                        |
| 5726/6AL5W/<br>6097 | 5726          | 6AL5<br>6663/6AL5                    | 6096                |        | 5654<br>6AK5/EF95                    |
| 5727                | 5727          | 2D21                                 | 6097                |        | 5726<br>6AL5<br>6663/6AL5            |
| 5727/2D21W          | 5727          | 2D21                                 | 6099                |        | 5964<br>6J6A                         |
| 5729/6BA6W          | 5749          | 6BA6/EF95                            | 6101                |        | 5964<br>6J6A                         |
| 5750                | 5750          | 6BE6                                 | 6101/6J6WA          |        | 5964<br>6J6A                         |
| 5751WA              |               | 5751                                 | 6136                | 6136   | 6AU6WB                               |
| 5812                |               | 5763                                 | 6140/423A           |        | 5651A                                |
| 5814                | 5814A         | 12AU7A/ECC82                         | 6180                |        | 5692                                 |
| 5814WA              |               | 12AU7A/ECC82<br>5814A                | 6186                |        | 6AG5                                 |
| 5840A               |               | 5840                                 | 6186/6AG5WA         |        | 6AG5                                 |
| 5840W               |               | 5840                                 | 6189                |        | 12AU7A/ECC82<br>5814A<br>6680/12AU7A |
| 5842                | 5842/417A     |                                      | 6189/12AU7WA        |        | 12AU7A/ECC82<br>5814A<br>6680/12AU7A |
| 5844                |               | 5964<br>6J6A                         |                     |        |                                      |
| 5881                |               | 6L6<br>6L6GC                         |                     |        |                                      |
| 5897                | 5718          |                                      |                     |        |                                      |
| 5901                | 5840          |                                      |                     |        |                                      |
| 5915A               |               | 5915                                 |                     |        |                                      |
| 5920                |               | 5964<br>6J6A                         |                     |        |                                      |
| 5930                |               | 2A3                                  |                     |        |                                      |
| 5931                |               | 5U4G<br>5U4GB                        |                     |        |                                      |
| 5963                | 5963          | 12AU7A/ECC82<br>5814A<br>6680/12AU7A |                     |        |                                      |
| 5964                | 5964          | 6J6A                                 |                     |        |                                      |
| 5965A               |               | 5965                                 |                     |        |                                      |
| 6005/6AQ5W          |               | 6005<br>6AQ5A                        |                     |        |                                      |

| Type to be Replaced | Direct          | RCA Replacement Similar          | Type to be Replaced | Direct           | RCA Replacement Similar       |
|---------------------|-----------------|----------------------------------|---------------------|------------------|-------------------------------|
| 6201                | 6201            | 12AT7WA<br>12AT7WB<br>6679/12AT7 | 6680/12AU7A         | 6680/<br>12AU7A  | 12AU7A/ECC82                  |
| 6211A               |                 | 6211                             | 6681                | 6681/<br>12AX7A  | 12AX7A/ECC83                  |
| 6336                | 6336A           |                                  | 6681/12AX7          | 6681/<br>12AX7A  | 12AX7A/ECC83                  |
| 6337                | 6336A           |                                  | 6681/12AX7A         | 6681/<br>12AX7A  | 12AX7A/ECC83                  |
| 6360                | 6360<br>6360A   |                                  | 6687                |                  | 5915                          |
| 6360A               | 6360A           | 6360                             | 6829                |                  | 5965                          |
| 6414                |                 | 5965                             | 6922                | 6922/E88CC       |                               |
| 6417                | 6417            | 7551                             | 7000                |                  | 1620                          |
| 6486                |                 | 6AS6<br>5725                     | 7036                |                  | 5915                          |
| 6486A               |                 | 6AS6<br>5725                     | 7044                | 8077/7054        | 7054                          |
| 6550                | 6550            | 7027A                            | 7062                |                  | 5965                          |
| 6626                | OA2WA           | OA2<br>OD3<br>OD3A               | 7105                |                  | 6AS7G<br>6080                 |
| 6626/OA2WA          | OA2WA           | OA2<br>OD3<br>OD3A               | 7244                |                  | 6J6A                          |
| 6627                | OB2WA           | OB2<br>OC3<br>OC3A               | 7244A               |                  | 6J6A                          |
| 6660                | 6660/6BA6       | 6BA6/EF93<br>5749                | 7245                |                  | 6J4                           |
| 6660/6BA6           | 6660/6BA6       | 6BA6/EF93<br>5749                | 7245A               |                  | 6J4                           |
| 6661                | 6661/6BH6       | 6BH6                             | 7318                |                  | 12AU7A/ECC82<br>5814A         |
| 6661/6BH6           | 6661/6BH6       | 6BH6                             | 7370                |                  | 5687                          |
| 6662                | 6662/6BJ6       | 6BJ6                             | 7543                |                  | 6AU6<br>6AU6WB                |
| 6663                | 6663/6AL5       | 6AL5<br>5726                     | 7645                | 6939             |                               |
| 6664                | 6664/6AB4       | 6AB4                             | 7701                |                  | 7551                          |
| 6664/6AB4           | 6664/6AB4       | 6AB4                             | 7717                | 7717/6CY5        | 6CY5                          |
| 6669                | 6669/6AQ5A      | 6AQ5A<br>6005                    | 7717/6CY5           | 7717/6CY5        | 6CY5                          |
| 6669/6AQ5A          | 6669/6AQ5A      | 6AQ5A<br>6005                    | 7724                | 7724/14GT8       | 14GT8                         |
| 6676                | 6676/6CB6A      | 6CB6A/6CF6                       | 7724/14GT8          | 7724/14GT8       | 14GT8                         |
| 6676/6CB6A          | 6676/6CB6A      | 6CB6A/6CF6                       | 7728                | 6201             |                               |
| 6677                | 6677/6CL6       | 6CL6                             | 7729                |                  | 12AX7A/ECC83<br>6681/12AX7A   |
| 6677/6CL6           | 6677/6CL6       | 6CL6                             | 7731                |                  | 6U8A/6KD8<br>6678/6U8A        |
| 6678                | 6678/6U8A       | 6U8A/6DK8                        | 7732                |                  | 6CB6A/6CF5                    |
| 6678/6U8A           | 6678/6U8A       | 6U8A/6DK8                        | 7733                |                  | 12AU7A/ECC82<br>5814A<br>5963 |
| 6679                | 6679/12AT7      | 12AT7WA<br>12AT7WB               | 8016                | 1G3GTA/<br>1B3GT |                               |
| 6679/12AT7          | 6679/12AT7      | 12AT7WA<br>12AT7WB               | 8077                | 8077/7054        | 7054                          |
| 6680                | 6680/<br>12AU7A | 12AU7A/ECC82                     | 8077/7054           | 8077/7054        | 7054                          |
|                     |                 |                                  | M8079               | 5726             | 6AL5<br>6663/6AL5             |
|                     |                 |                                  | M8096               | 5763             |                               |
|                     |                 |                                  | M8136               | 6189/<br>12AU7WA | 12AU7A/ECC82                  |

| Type to be Replaced | RCA Replacement    |                    | Type to be Replaced | RCA Replacement |         |
|---------------------|--------------------|--------------------|---------------------|-----------------|---------|
|                     | Direct             | Similar            |                     | Direct          | Similar |
| M8162               | 12AT7WA<br>12AT7WB | 6679/12AT7         | M8232               |                 | 6J4     |
| M8196               | 5725               | 6AS6               | M8245               | 6005            | 6AQ5A   |
| M8204               | 5727               | 2D21               | 8380                | 7587            |         |
| M8212               | 5726               | 6AL5<br>6663/6AL5  | 8382                | 7586            |         |
| M8223               | 0A2WA              | 0A2<br>0D3<br>0D3A | 8441                | 7895            |         |
| M8224               | 0B2WA              | 0B2<br>0C3<br>0C3A | 8532                |                 | 6J4     |
|                     |                    |                    | 8532/6J4WA          |                 | 6J4     |
|                     |                    |                    | 8556                | 8056            |         |
|                     |                    |                    | CCa                 | 6922/E88CC      |         |

# PICTURE TUBE CHARACTERISTICS CHART

## Color Picture Tubes

| Type No.  | Envelope Code ● | Safety Feature ★ | Nom. Deflection Angle Degrees | Heater Volts/mA | Design Max. Anode Voltage kV | Range of Focus Voltage in Volts or % of Anode Voltage | Range of G2 Voltage Volts | Screen Diag. Inches | Terminal Diagram ▲ |
|---|-----------------|------------------|-------------------------------|-----------------|------------------------------|---|---------------------------|---------------------|--------------------|
| 11WP22 <sup>c</sup>   | SGA             | P                | 72                            | 13.8/580        | 18.0                         | -250 — +500V <sup>g</sup>                             | 220 — 460 <sup>k</sup>    | 10.250              | 14BJ               |
| 14VAHP22 <sup>h</sup>                                       | SGA             | H                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 13.557              | 14BH               |
| 14VALP22 <sup>h</sup>                                       | SGA             | M                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 13.557              | 14BH               |
| 15AEP22 <sup>c</sup>  | SGA             | M                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 13.557              | 14BH               |
| 15LP22 <sup>c</sup>   | SGAT            | D                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 13.557              | 14BH               |
| 15NP22 <sup>c</sup>   | SGA             | H                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 13.557              | 14BH               |
| 15VADTC01 <sup>hp</sup>                                     | SGA             | H                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 425 — 820                 | 15.051              | 13D                |
| 16VACP22 <sup>h</sup>                                       | SGA             | H                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 165 — 420 <sup>i</sup>    | 16.191              | 14BH               |
| 17EZP22 <sup>c</sup>  | SGA             | H                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 16.191              | 14BH               |
| 17VACP22 <sup>h</sup>                                       | SGA             | F                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 385 <sup>i</sup>    | 17.018              | 14BH               |
| 17VADP22 <sup>hm</sup>                                      | SGA             | F                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 385 <sup>i</sup>    | 17.018              | 14BH               |
| 17VARP22 <sup>hm</sup>                                      | SGA             | F                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 255 — 655                 | 17.018              | 14BE               |
| 18VAHP22 <sup>h</sup>                                       | SGAT            | D                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 18.075              | 14BE               |
| 18VBJP22 <sup>h</sup>                                       | SGA             | F                | 110                           | 6.3/900         | 22.5                         | 16.8 — 20.0   | 265 — 665                 | 18.075              | 13C                |
| 18VAZP22 <sup>h</sup>                                       | SGA             | F                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 18.075              | 14BH               |
| 18VBDP22 <sup>h</sup>                                       | SGA             | F                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 18.075              | 14BH               |
| 18VBGP22 <sup>h</sup>                                       | SGAT            | D                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 18.075              | 14BH               |
| 18VBJP22 <sup>h</sup>                                       | SGA             | K                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 18.075              | 14BH               |
| 18VBKP22 <sup>hm</sup>                                      | SGA             | F                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 18.075              | 14BE               |
| 19GVP22/<br>19EXP22 <sup>c</sup>                            | SGA             | A                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 18.075              | 14BE               |
| 19GWP22/<br>19EYP22 <sup>c</sup>                            | SGAT            | D                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 18.075              | 14BE               |
| 19HCP22/<br>19HKP22 <sup>c</sup>                            | SGA             | F                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 18.075              | 14BE               |
| 19HNP22 <sup>c</sup>  | SGA             | F                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 18.075              | 14BH               |
| 19JWP22 <sup>c</sup>  | SGAT            | D                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 18.075              | 14BH               |
| 19VABP22 <sup>h</sup>                                       | RGAT            | D                | 70                            | 6.3/1800        | 27.5                         | 16.8 — 20.0   | 310 — 690                 | 19.250              | 14AU               |
| 19VANP22 <sup>h</sup>                                       | SGA             | F                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 18.897              | 14BH               |
| 19VBLP22 <sup>h</sup>                                       | SGA             | F                | 110                           | 6.3/900         | 27.5                         | 16.8 — 20.0   | 265 — 665                 | 18.897              | 13C                |
| 19VBQP22 <sup>hm</sup>                                      | SGA             | F                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 375 <sup>j</sup>    | 18.897              | 14BH               |
| 19VBRP22 <sup>hm</sup>                                      | SGA             | F                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 18.897              | 14BE               |
| 19VCTP22 <sup>hm</sup>                                      | SGA             | F                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 18.897              | 14BE               |
| 19VDS P22 <sup>hm</sup>                                     | SGA             | F                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 260 — 660                 | 18.897              | 14BE               |
| 19VDT P22 <sup>h</sup>                                      | SGA             | F                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 18.897              | 14BE               |
| 20VAGP22 <sup>h</sup>                                       | SGAT            | D                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 20.233              | 14BE               |
| 20VAHP22 <sup>h</sup>                                       | SGA             | F                | 90                            | 6.3/900         | 22.5                         | -75V — +400V <sup>g</sup>                             | 150 — 390 <sup>i</sup>    | 20.233              | 14BH               |
| 21FBP22 <sup>c</sup>  | RGA             | A                | 70                            | 6.3/1800        | 27.5                         | 16.8 — 20.0   | 310 — 690                 | 19.250              | 14AU               |
| 21FJP22 <sup>c</sup> /<br>21GUP22/<br>21FBP22A <sup>c</sup> | RGAT            | D                | 70                            | 6.3/1800        | 27.5                         | 16.8 — 20.0   | 310 — 690                 | 19.250              | 14AU               |
| 21GVP22/<br>21FJP22A <sup>c</sup>                           | RGAT            | D                | 70                            | 6.3/1900        | 27.5                         | 16.8 — 20.0   | 310 — 690                 | 19.250              | 14AU               |
| 21VAKP22 <sup>hm</sup>                                      | SGAT            | D                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 20.871              | 14BE               |
| 21VAZP22 <sup>hm</sup>                                      | SGA             | F                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 260 — 660                 | 20.871              | 14BE               |
| 22JP22 <sup>c</sup>   | SGAT            | D                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 20.233              | 14BE               |
| 22KP22 <sup>c</sup>   | SGA             | A                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 20.233              | 14BE               |
| 22UP22 <sup>c</sup>   | SGA             | F                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 285 — 685                 | 20.233              | 14BE               |
| 23EGP22 <sup>c</sup>  | SGAT            | D                | 92                            | 6.3/1350        | 27.5                         | 16.7 — 21.6   | 320 — 625 <sup>j</sup>    | 22.375              | 14BE               |
| 23VALP22 <sup>hm</sup>                                      | SGAT            | D                | 90                            | 6.3/900         | 27.5                         | 16.8 — 20.0   | 260 — 660                 | 22.995              | 14BE               |

**Color Picture Tubes (Cont.)**

| Type No.               | Envelope Code ● | Safety Feature ★ | Nom. Deflection Angle Degrees | Heater Volts/mA | Design Max. Anode Voltage kV | Range of Focus Voltage in Volts or % of Anode Voltage | Range of G2 Voltage Volts | Screen Diag. Inches | Terminal Diagram ▲ |
|------------------------|-----------------|------------------|-------------------------------|-----------------|------------------------------|---|---------------------------|---------------------|--------------------|
| 23VANP22 <sup>h</sup>  | SGAT            | D                | 90                            | 6.3/900         | 27.5                         | 16.8—20.0   | 260—660                   | 22.995              | 14BE               |
| 23VAQP22 <sup>h</sup>  | SGA             | F                | 90                            | 6.3/900         | 27.5                         | 16.8—20.0   | 260—660                   | 22.995              | 14BE               |
| 25BCP22 <sup>cm</sup>  | SGAT            | D                | 90                            | 6.3/900         | 27.5                         | 16.8—20.0   | 260—660                   | 22.995              | 14BE               |
| 25XP22/                |                 |                  |                               |                 |                              |   |                           |                     |                    |
| 25ALP22A <sup>c</sup>  | SGA             | K                | 90                            | 6.3/900         | 27.5                         | 16.8—20.0   | 260—660                   | 22.995              | 14BE               |
| 25VABP22 <sup>hm</sup> | SGA             | D                | 90                            | 6.3/900         | 27.5                         | 16.8—20.0   | 260—660                   | 24.658              | 14BE               |
| 25VAMP22 <sup>hm</sup> | SGAT            | D                | 90                            | 6.3/900         | 27.5                         | 16.8—20.0   | 250—650                   | 24.658              | 14BE               |
| 25VBEP22 <sup>hm</sup> | SGA             | K                | 90                            | 6.3/900         | 27.5                         | 16.8—20.0   | 285—685                   | 24.658              | 14BE               |
| 25XP22/                |                 |                  |                               |                 |                              |   |                           |                     |                    |
| 25AP22A <sup>c</sup>   | SGAT            | D                | 90                            | 6.3/900         | 27.5                         | 16.8—20.0   | 285—685                   | 22.995              | 14BE               |
| 25YP22/                |                 |                  |                               |                 |                              |   |                           |                     |                    |
| 25BP22A <sup>c</sup>   | SGA             | A                | 90                            | 6.3/900         | 27.5                         | 16.8—20.0   | 285—685                   | 22.995              | 14BE               |

**Color Test Picture Tube**

|         |      |   |    |         |      |           |         |        |      |
|---------|------|---|----|---------|------|-----------|---------|--------|------|
| 1830P22 | SGAT | D | 90 | 6.3/900 | 27.5 | 16.8—20.0 | 285—685 | 18.075 | 14BE |
|---------|------|---|----|---------|------|-----------|---------|--------|------|

**Silverama<sup>a</sup> Types for Black-and-White TV**

| Type No. | Envelope Code ● | Safety Feature ★ | Nom. Deflection Angle Degrees | Heater Volts/mA | Focusing Method ■ | Design Max. Anode Voltage kV | Typical G2 Voltage Volts | Screen Diag. Inches | Max. Overall Length Inches | Terminal Diagram ▲ |
|----------|-----------------|------------------|-------------------------------|-----------------|-------------------|------------------------------|--------------------------|---------------------|----------------------------|--------------------|
| 5VABP4   | SGA             | A                | 70                            | 12.0/79         | E                 | 15.0                         | 115                      | 5.036               | 7.550                      | 7GR                |
| 8DP4‡    | SG              | A                | 90                            | 6.3/600         | E                 | 9.0                          | 200                      | 7.750               | 10.750                     | 12AB               |
| 9AEP4    | SGA             | F                | 85                            | 6.3/450         | E                 | 15.0                         | 100                      | 9.024               | 8.700                      | 7GR                |
| 9VABP4   | SGA             | F                | 85                            | 6.3/450         | E                 | 15.0                         | 140                      | 9.024               | 8.700                      | 7GR                |
| 9WP4     | SGA             | G                | 90                            | 12.0/75         | E                 | 12.0                         | 100                      | 8.270               | 8.270                      | 7GR                |
| 10ATP4   | SGA             | F                | 85                            | 6.3/300         | E                 | 15.0                         | 140                      | 9.024               | 8.700                      | 7GR                |
| 10AVP4   | SGA             | F                | 85                            | 12.0/79         | E                 | 15.0                         | 90                       | 9.024               | 8.700                      | 7GR                |
| 11CP4    | SGA             | A                | 110                           | 6.3/450         | E                 | 15.0                         | 400                      | 10.125              | 9.188                      | 8HR                |
| 11GP4    | SGA             | C                | 110                           | 6.3/450         | E                 | 15.0                         | 135                      | 10.188              | 9.188                      | 8HR                |
| 12BNP4A  | SGA             | J                | 110                           | 6.3/450         | E                 | 16.0                         | 250                      | 11.625              | 9.598                      | 8HR                |
| 12DEP4   | SGA             | F                | 110                           | 6.3/450         | E                 | 15.0                         | 100                      | 11.625              | 9.690                      | 7GR                |
| 12DFP4   | SGA             | H                | 110                           | 6.3/450         | E                 | 15.0                         | 200                      | 11.620              | 9.060                      | 7GR                |
| 12DKP4   | SGA             | F                | 110                           | 6.3/450         | E                 | 16.0                         | 140                      | 11.625              | 9.374                      | 7GR                |
| 12DSP4   | SGA             | H                | 110                           | 6.3/300         | E                 | 15.0                         | 140                      | 11.625              | 9.274                      | 7GR                |
| 12VAGP4  | SGA             | G                | 110                           | 6.3/300         | E                 | 14.0                         | 200                      | 11.500              | 9.530                      | 7GR                |
| 12VAGP4  | SGA             | G                | 110                           | 4.2/450         | E                 | 15.0                         | 140                      | 11.500              | 9.528                      | 7GR                |
| 12VAXP4  | SGA             | J                | 110                           | 11.0/82         | E                 | 14.0                         | 150                      | 11.500              | 9.528                      | 7GR                |
| 13AP4    | SGA             | C                | 110                           | 6.3/450         | E                 | 15.0                         | 50                       | 11.938              | 9.516                      | 8HR                |
| 15VACP4  | SGA             | H                | 114                           | 6.3/450         | E                 | 20.0                         | 30                       | 14.875              | 10.811                     | 8HR                |
| 16BGP4   | SGA             | G                | 114                           | 6.3/450         | E                 | 20.0                         | 300                      | 14.875              | 10.811                     | 8HR                |
| 16CHP4A  | SGA             | J                | 114                           | 6.3/450         | E                 | 20.0                         | 30                       | 14.875              | 10.811                     | 8HR                |
| 16CMP4A  | SGA             | G                | 114                           | 6.3/450         | E                 | 18.0                         | 300                      | 14.875              | 10.811                     | 8HR                |
| 16RP4B   | SGA             | A                | 70                            | 6.3/600         | M                 | 17.5                         | 300                      | 14.875              | 19.125                     | 12N                |
| 17BJP4   | SGA             | A                | 90                            | 6.3/600         | E                 | 17.5                         | 300                      | 15.562              | 15.000                     | 12L                |
| 17BP4D   | SGA             | A                | 70                            | 6.3/600         | M                 | 17.5                         | 300                      | 15.562              | 19.562                     | 12N                |

▲ Terminal diagrams for RCA picture tubes are shown on pages 668 and 669.  
 For SAFETY PRECAUTIONS and NOTES refer to page 666.

‡ Requires ION trap.

Silverama<sup>®</sup> Types for Black-and-White TV (Cont.)

| Type No.          | Envelope Code ● | Safety Feature ★ | Nom. Deflection Angle Degrees | Heater Volts/mA | Focus- ing Method ■ | Design Max. Anode Voltage KV | Typical G2 Voltage Volts | Screen Diag. Inches | Max. Overall Length Inches | Terminal Diagram ▲ |
|-------------------|-----------------|------------------|-------------------------------|-----------------|---------------------|------------------------------|--------------------------|---------------------|----------------------------|--------------------|
| 17CFP4            | SGA             | A                | 90                            | 6.3/600         | E                   | 17.5                         | 300                      | 15.750              | 14.375                     | 12L                |
| 17DQP4            | SGA             | A                | 110                           | 6.3/450         | E                   | 17.5                         | 50                       | 15.750              | 12.375                     | 7FA                |
| 17DRP4            | SGA             | A                | 110                           | 2.68/450        | E                   | 17.5                         | 300                      | 15.750              | 11.000                     | 8JK                |
| 17DSP4            | SGA             | A                | 110                           | 6.3/600         | E                   | 20.0                         | 400                      | 15.750              | 11.438                     | 8HR                |
| 17EMP4            | SGA             | F                | 114                           | 6.3/450         | E                   | 22.0                         | 50                       | 16.250              | 11.562                     | 8HR                |
| 17HP4C            | SGA             | A                | 70                            | 6.3/600         | E                   | 17.5                         | 300                      | 15.562              | 19.562                     | 12L                |
| 17LP4B            | SGCA            | A                | 70                            | 6.3/600         | E                   | 17.5                         | 300                      | 15.562              | 19.562                     | 12L                |
| 17QP4B            | SGCA            | A                | 70                            | 6.3/600         | M                   | 20.0                         | 300                      | 15.562              | 19.562                     | 12N                |
| 18VAUP4           | SGA             | F                | 114                           | 6.3/450         | E                   | 23.5                         | 30                       | 17.562              | 11.875                     | 8HR                |
| 18ABP4            | SGA             | A                | 114                           | 2.68/450        | E                   | 20.0                         | 300                      | 17.562              | 11.125                     | 8JK                |
| 19AFP4            | SGA             | B                | 114                           | 6.3/600         | E                   | 20.0                         | 300                      | 17.625              | 11.938                     | 8HR                |
| 19AJP4            | SGA             | A                | 114                           | 6.3/450         | E                   | 20.0                         | 50                       | 17.562              | 11.625                     | 7FA                |
| 19AVP4            | SGA             | A                | 114                           | 6.3/600         | E                   | 23.0                         | 400                      | 17.562              | 11.625                     | 8HR                |
| 19AYP4            | SGA             | A                | 114                           | 6.3/450         | E                   | 23.0                         | 400                      | 17.562              | 11.625                     | 8HR                |
| 19BDP4            | SGA             | A                | 92                            | 6.3/600         | E                   | 19.8                         | 50                       | 17.562              | 15.625                     | 12L                |
| 19CHP4            | SGA             | A                | 114                           | 6.3/600         | E                   | 20.0                         | 50                       | 17.562              | 11.875                     | 8HR                |
| 19CMP4            | SGA             | A                | 114                           | 6.3/450         | E                   | 20.0                         | 30                       | 17.562              | 11.875                     | 8HR                |
| 19CVP4            | SGA             | B                | 114                           | 6.3/450         | E                   | 23.0                         | 50                       | 17.625              | 11.938                     | 8HR                |
| 19CXP4            | SGA             | A                | 114                           | 6.3/600         | E                   | 20.0                         | 45                       | 17.562              | 11.875                     | 7FA                |
| 19DBP4            | SGA             | D                | 114                           | 6.3/450         | E                   | 19.8                         | 40                       | 17.562              | 12.125                     | 7FA                |
| 19DQP4            | SGA             | G                | 114                           | 6.3/450         | E                   | 23.0                         | 300                      | 17.562              | 11.875                     | 8HR                |
| 19DRP4            | SGA             | G                | 114                           | 6.3/600         | E                   | 23.0                         | 300                      | 17.562              | 11.875                     | 8HR                |
| 19DSP4            | SGA             | G                | 114                           | 6.3/600         | E                   | 20.0                         | 50                       | 17.562              | 11.875                     | 8HR                |
| 19DUP4            | SGA             | F                | 114                           | 6.3/450         | E                   | 22.0                         | 50                       | 17.562              | 11.969                     | 8HR                |
| 19EBP4            | SGA             | C                | 114                           | 6.3/600         | E                   | 23.0                         | 400                      | 17.562              | 11.875                     | 8HR                |
| 19EGP4            | SGA             | C                | 114                           | 6.3/450         | E                   | 21.0                         | 50                       | 17.562              | 11.875                     | 8HR                |
| 19EZP4            | SGA             | C                | 114                           | 6.3/450         | E                   | 19.8                         | 45                       | 17.562              | 11.875                     | 7FA                |
| 19FLP4            | SGA             | G                | 114                           | 6.3/450         | E                   | 23.0                         | 300                      | 17.562              | 11.625                     | 8HR                |
| 19GAP4            | SGA             | C                | 114                           | 6.3/450         | E                   | 19.8                         | 400                      | 17.562              | 11.875                     | 8HR                |
| 19GEP4A           | SGA             | L                | 114                           | 6.3/450         | E                   | 23.0                         | 300                      | 17.562              | 11.875                     | 8HR                |
| 19VAHP4           | SGA             | H                | 114                           | 6.3/450         | E                   | 23.0                         | 30                       | 18.625              | 12.519                     | 8HR                |
| 19VAJP4           | SGA             | H                | 114                           | 9.45/300        | E                   | 23.0                         | 30                       | 18.625              | 12.519                     | 8HR                |
| 19VALP4           | SGA             | C                | 114                           | 6.3/450         | E                   | 23.0                         | 300                      | 18.625              | 12.519                     | 8HR                |
| 20RP4             | SGA             | F                | 114                           | 6.3/450         | E                   | 22.0                         | 50                       | 18.625              | 12.613                     | 8HR                |
| 20TP4             | SGA             | J                | 114                           | 6.3/450         | E                   | 23.0                         | 300                      | 18.625              | 12.519                     | 8HR                |
| 20VAQP4           | SGA             | F                | 114                           | 6.3/450         | E                   | 23.5                         | 30                       | 19.625              | 12.937                     | 8HR                |
| 21AMP4B           | SGA             | A                | 90                            | 6.3/600         | M                   | 20.0                         | 300                      | 20.250              | 20.375                     | 12N                |
| 21AVP4C           | SGA             | A                | 72                            | 6.3/600         | E                   | 22.0                         | 300                      | 20.250              | 23.406                     | 12L                |
| 21AWP4A           | SGA             | A                | 72                            | 6.3/600         | M                   | 20.0                         | 400                      | 20.250              | 23.406                     | 12N                |
| 21CBP4A           | SGA             | A                | 90                            | 6.3/600         | E                   | 22.0                         | 300                      | 20.250              | 18.375                     | 12L                |
| 21CQP4            | SGA             | A                | 110                           | 6.3/600         | E                   | 20.0                         | 300                      | 20.250              | 14.812                     | 7FA                |
| 21DLP4            | SGA             | A                | 90                            | 6.3/600         | E                   | 22.0                         | 300                      | 20.250              | 17.375                     | 12L                |
| 21DSP4            | SGA             | A                | 90                            | 6.3/600         | E                   | 22.0                         | 50                       | 20.250              | 18.375                     | 12L                |
| 21EMP4/<br>21EQP4 | SGA             | A                | 110                           | 6.3/600         | E                   | 20.0                         | 500                      | 20.250              | 13.440                     | 8HR                |
| 21EP4C            | SGCA            | A                | 70                            | 6.3/600         | M                   | 20.0                         | 300                      | 20.000              | 23.406                     | 12N                |
| 21FDP4            | SGA             | A                | 110                           | 6.3/600         | E                   | 20.0                         | 300                      | 20.250              | 13.375                     | 8KW                |
| 21FP4B            | SGCA            | A                | 70                            | 6.3/600         | E                   | 20.0                         | 300                      | 20.000              | 23.406                     | 12L                |
| 21FVP4            | SGA             | G                | 114                           | 6.3/450         | E                   | 23.0                         | 400                      | 19.625              | 12.937                     | 8HR                |
| 21GAP4A           | SGA             | G                | 114                           | 6.3/450         | E                   | 23.5                         | 30                       | 19.625              | 12.937                     | 8HR                |
| 21WP4B            | SGA             | A                | 70                            | 6.3/600         | M                   | 20.0                         | 300                      | 19.250              | 22.812                     | 12N                |

**Silverama<sup>a</sup> Types for Black-and-White TV (Cont.)**

| Type No.          | Envelope Code ● | Safety Feature ★ | Nom. Deflection Angle Degrees | Heater Volts/ma | Focus-ing Method ■ | Design Max. Anode Voltage kV | Typical G2 Voltage Volts | Screen Diag. inches | Max. Over-all Length inches | Terminal Diagram ▲ |
|-------------------|-----------------|------------------|-------------------------------|-----------------|--------------------|------------------------------|--------------------------|---------------------|-----------------------------|--------------------|
| 21XP4B            | SGA             | A                | 70                            | 6.3/600         | E                  | 20.0                         | 300                      | 19.250              | 22.812                      | 12L                |
| 21YP4B            | SGA             | A                | 70                            | 6.3/600         | E                  | 20.0                         | 300                      | 20.000              | 23.406                      | 12L                |
| 21ZP4C            | SGA             | A                | 70                            | 6.3/600         | M                  | 20.0                         | 300                      | 20.000              | 23.406                      | 12N                |
| 22VABP4           | SGA             | F                | 110                           | 6.3/450         | E                  | 23.5                         | 30                       | 22.312              | 14.406                      | 8HR                |
| 22VACP4           | SGAT            | D                | 110                           | 6.3/450         | E                  | 23.0                         | 30                       | 22.312              | 14.594                      | 8HR                |
| 22VADP4           | SGA             | C                | 92                            | 6.3/450         | E                  | 25.0                         | 400                      | 22.312              | 18.375                      | 12L                |
| 22VAEP4           | SGA             | K                | 110                           | 6.3/450         | E                  | 23.0                         | 300                      | 22.312              | 15.156                      | 8HR                |
| 23AHP4/<br>23ASP4 | SGA             | A                | 92                            | 6.3/600         | E                  | 22.0                         | 400                      | 22.312              | 17.875                      | 12L                |
| 23ARP4            | SGA             | A                | 110                           | 6.3/600         | E                  | 22.0                         | 400                      | 22.312              | 15.156                      | 8HR                |
| 23BGP4            | SGA             | B                | 110                           | 6.3/600         | E                  | 22.0                         | 50                       | 22.312              | 15.562                      | 8HR                |
| 23BJP4            | SGA             | A                | 92                            | 6.3/600         | E                  | 25.0                         | 50                       | 22.312              | 18.500                      | 12L                |
| 23BKP4            | SGA             | B                | 92                            | 6.3/600         | E                  | 25.0                         | 50                       | 22.312              | 18.875                      | 12L                |
| 23BQP4            | SGA             | B                | 110                           | 6.3/450         | E                  | 23.0                         | 300                      | 22.312              | 15.562                      | 8HR                |
| 23CGP4            | SGA             | A                | 92                            | 6.3/450         | E                  | 22.0                         | 500                      | 22.312              | 18.375                      | 12L                |
| 23CP4             | SGA             | B                | 110                           | 6.3/600         | E                  | 22.0                         | 400                      | 22.312              | 15.562                      | 8HR                |
| 23CQP4            | SGA             | A                | 114                           | 6.3/450         | E                  | 23.5                         | 500                      | 22.312              | 14.000                      | 8HR                |
| 23DAP4            | SGA             | A                | 94                            | 6.3/600         | E                  | 23.0                         | 50                       | 22.312              | 17.391                      | 8HR                |
| 23DBP4            | SGA             | A                | 110                           | 6.3/600         | E                  | 22.0                         | 50                       | 22.312              | 15.156                      | 8HR                |
| 23EKP4            | SGA             | G                | 92                            | 6.3/450         | E                  | 25.0                         | 400                      | 22.312              | 18.375                      | 12L                |
| 23ENP4            | SGA             | G                | 92                            | 6.3/600         | E                  | 25.0                         | 50                       | 22.312              | 18.500                      | 12L                |
| 23EP4             | SGA             | B                | 110                           | 6.3/600         | E                  | 22.0                         | 50                       | 22.312              | 15.562                      | 8KP                |
| 23ETP4            | SGA             | G                | 110                           | 6.3/600         | E                  | 23.0                         | 300                      | 22.312              | 15.156                      | 8HR                |
| 23EWP4A           | SGA             | F                | 114                           | 6.3/450         | E                  | 22.0                         | 400                      | 22.312              | 14.812                      | 8HR                |
| 23EYP4            | SGA             | C                | 92                            | 6.3/600         | E                  | 25.0                         | 35                       | 22.312              | 18.500                      | 12L                |
| 23ZEP4            | SGA             | K                | 94                            | 6.3/450         | E                  | 23.5                         | 50                       | 22.312              | 17.390                      | 8HR                |
| 23FP4A            | SGA             | A                | 114                           | 6.3/600         | E                  | 23.5                         | 500                      | 22.312              | 14.062                      | 8HR                |
| 23FRP4            | SGA             | C                | 110                           | 6.3/450         | E                  | 23.0                         | 50                       | 22.312              | 14.500                      | 8HR                |
| 23FSP4            | SGA             | C                | 110                           | 6.3/600         | E                  | 23.0                         | 400                      | 22.312              | 15.125                      | 8HR                |
| 23GWP4            | SGA             | F                | 110                           | 6.3/450         | E                  | 22.0                         | 50                       | 22.312              | 14.781                      | 8HR                |
| 23HFP4A           | SGA             | G                | 110                           | 6.3/450         | E                  | 23.0                         | 300                      | 22.312              | 15.156                      | 8HR                |
| 23HUP4A           | SGA             | G                | 110                           | 6.3/450         | E                  | 23.5                         | 30                       | 22.312              | 14.406                      | 8HR                |
| 23HWP4A           | SGA             | L                | 110                           | 6.3/450         | E                  | 22.0                         | 50                       | 22.312              | 15.156                      | 8HR                |
| 23JEP4            | SGA             | K                | 110                           | 6.3/450         | E                  | 23.0                         | 300                      | 22.312              | 15.156                      | 8HR                |
| 23JP4             | SGA             | B                | 110                           | 6.3/450         | E                  | 22.0                         | 50                       | 22.312              | 15.875                      | 7FA                |
| 23NP4             | SGA             | A                | 114                           | 6.3/600         | E                  | 22.0                         | 50                       | 22.312              | 14.812                      | 8HR                |
| 23YP4             | SGA             | B                | 92                            | 6.3/600         | E                  | 22.0                         | 300                      | 22.312              | 18.750                      | 12L                |
| 24AEP4            | SGA             | A                | 90                            | 6.3/600         | E                  | 22.0                         | 300                      | 22.812              | 19.500                      | 12L                |
| 24AHP4            | SGA             | A                | 110                           | 6.3/600         | E                  | 22.0                         | 400                      | 22.812              | 16.188                      | 8HR                |
| 24AUP4            | SGA             | A                | 90                            | 6.3/600         | E                  | 22.0                         | 300                      | 22.812              | 18.500                      | 12L                |
| 24CP4B            | SGA             | A                | 90                            | 6.3/600         | M                  | 22.0                         | 300                      | 22.812              | 21.500                      | 12N                |

**Black-and-White Test Picture Tubes**

|      |     |   |     |         |   |      |     |       |        |     |
|------|-----|---|-----|---------|---|------|-----|-------|--------|-----|
| 8XP4 | SGA | A | 90  | 6.3/600 | A | 22.0 | 400 | 7.750 | 11.750 | 12S |
| 8YP4 | SGA | A | 110 | 6.3/600 | A | 22.0 | 400 | 7.875 | 9.000  | 7FG |

▲ Terminal diagrams for RCA picture tubes are shown on pages 668 and 669.  
For SAFETY PRECAUTIONS and NOTES refer to page 666.

## SAFETY PRECAUTIONS

In servicing a television receiver that requires a replacement picture tube, a tube with the same type number or an RCA recommended replacement tube type

should be used to assure the same or improved integral x-radiation shielding and implosion protection.

**Note:** For additional Safety Precautions, refer to page 93.

### Notes for Picture Tube Characteristic Chart

● **Envelope Code** (All types have spherical faceplate except where noted)

- R Round
- S Rectangular
- G Glass
- C Cylindrical faceplate
- A Aluminized
- T Treated faceplate

★ **Safety Feature**

- A Conventional Tube — Requires Safety Window in Receiver
- B Integral Moulded-Glass Safety Panel (Bi-Panel\*)
- C Filled Rim (Shelbond†)
- D Integral Safety Panel (Laminated)
- F Tension Band Over Formed Rim Bands (Kimcode †)
- G Welded Tension Band Over Formed Rim Bands (Pan-O-Ply\*)
- H Tension Band Over Tape (T-Band)
- J Welded Tension Band Over Tape (T-Band)
- K Tension Band Over Formed Rim Bands With Mounting Lugs (Kimcode/Lugs)

- L Welded Tension Band Over Formed Rim Bands With Mounting Lugs (Pan-O-Ply/Lugs)
- M Tension Band With Mounting Lugs Over Tape (T-Band Lugs)
- P Fiberglass Tape Tension Band

■ **Focusing Method**

- A Automatic focus
- E Electrostatic focus
- M Magnetic focus

**Footnotes**

- a. All Materials and parts used in the manufacture of RCA Silverama Picture Tubes are new except for the envelope which, prior to reuse, was carefully inspected to meet the standards of the original new envelope.
- c. Only Colorama versions (prefix C—) are available. RCA Colorama Picture Tubes contain used materials which, prior to re-

use, are carefully inspected to meet RCA's high quality standards.

g. This type has an einzel lens focus system. Values shown are in volts which do not vary with anode voltage.

h. Only Hi-Lite Versions (prefix H—) are available. RCA Hi-Lite Color Picture Tubes contain all New Parts and Materials.

j. At Grid-No.1 voltage of —100 volts.

k. At Grid-No.1 voltage of —50 volts.

m. MATRIX Color Picture Tube.

p. Precision In Line Color Picture Tube.

\* Trademark of RCA, Harrison, N.J. 07029

† Trademark of Corning Glass Works, Corning, N.Y. 14830

‡ Trademark of Owens-Illinois, Inc., Columbus, Oh. 58727




Key to Color Picture Tube Type Designation System

| Old-Designation Series (Rounded-off Tube Glass Diagonal in Inches) | Equivalent New Designation Series (Rounded-off Min. Screen Diagonal in Inches) | Comparable Japanese Designation Series (Rounded-off Tube Glass Diagonal in mm) | Other Designation Series Replaced by this Series |
|--|--|--|--|
| 11   | 10 V   | 270  | —  |
| 12   | —  | —  | —  |
| 13   | 12 V   | 320  | —  |
| 14   | —  | 350  | —  |
| 15   | 14 V   | 370  | —  |
| —  | 15 V   | —  | —  |
| 16   | —  | 400  | —  |
| 17   | 16 V   | 440  | —  |
| —  | 17 V   | 470  | —  |
| 19   | 18 V   | 490  | —  |
| —  | 19 V   | 510  | —  |
| 21   | —  | —  | —  |
| 21 (Round)   | 19 V   | —  | —  |
| 22   | 20 V   | 550  | 21   |
| 22   | 21 V   | —  | —  |
| 23   | —  | —  | —  |
| 25   | 23 V   | —  | 23   |
| 26   | 25 V   | —  | —  |


Key to Black-and-White Picture Tube Type Designation System

| Old-Designation Series (Rounded-off Tube Glass Diagonal in Inches) | Equivalent New Designation Series (Rounded-off Min. Screen Diagonal in Inches) | Comparable Japanese Designation Series (Rounded-off Tube Glass Diagonal in mm) |
|--|--|--|
| 9  | —  | 230  |
| 10   | —  | 240  |
| 11   | —  | 280  |
| 12   | 12 V   | 310  |
| 13   | —  | —  |
| —  | 13 V   | 340  |
| 14   | —  | —  |
| 15   | —  | —  |
| 16   | 15 V   | 400  |
| 17   | 16 V   | 440  |
| 19   | 18 V   | 470  |
| 20   | 19 V   | 500  |
| 21   | 20 V   | 520  |
| 22   | 21 V   | —  |
| 23   | 22 V   | 590  |
| 24   | —  | —  |
| 25   | —  | —  |


# Terminal Diagrams for Picture Tubes

**7FA**


Anode =  $G_3 + G_5 + CL$   
Focusing Electrode =  $G_4$

**7FG**


Anode =  $G_3 + G_5 + CL$   
Automatic Focusing

**7GR**


Anode =  $G_3 + G_5 + CL$   
Focusing Electrode =  $G_4$

**8HR**


Anode =  $G_3 + G_5 + CL$   
Focusing Electrode =  $G_4$

**8JK**

Anode =  $G_3 + G_5 + CL$   
Focusing Electrode =  $G_4$


**8KW**

Anode =  $G_3 + G_5 + CL$   
Focusing Electrode =  $G_4$




**12AB**

Anode =  $G_3 + G_4 + CL$   
 Focusing Electrode =  $G_6$




**12L**

Anode =  $G_3 + G_4 + CL$   
 Focusing Electrode =  $G_6$




**12N**

Anode =  $G_3 + CL$




**12S**

Anode =  $G_3 + G_4 + CL$   
 Automatic Focusing




**13C**

Anode =  $G_4 + CL$   
 Focusing Electrode =  $G_3$




**13D**

Anode =  $G_2 + CL$   
 Focusing Electrode =  $G_3$




**14AU**

Anode =  $G_4 + G_5 + CL$   
 Focusing Electrode =  $G_6$



**14BE**

Anode =  $G_4 + G_5 + CL$   
 Focusing Electrode =  $G_6$



**14BJ**

Anode =  $G_3 + G_4 + CL$   
 Focusing Electrode =  $G_6$

# Circuits

**T**HE circuits included in this Manual illustrate some of the more important applications of RCA receiving tubes; they are not necessarily examples of commercial practice. These circuits have been conservatively designed and are capable of excellent performance. The brief description provided with each circuit explains the functional relationships of the various stages and points out intended applications, major performance characteristics, and significant design features of the over-all circuit. Detailed descriptive information on individual circuit stages (for example, amplifiers, detectors, or oscillators) is given in the section on **Electron-Tube Applications** earlier in this Manual, as well as in many textbooks on electron-tube circuits.

Electrical specifications are given for circuit components to assist those interested in home construction. Layouts and mechanical details are omitted because they vary widely with the requirements of individual set builders and with the sizes and shapes of the components employed.

Circuits designed for operation from both ac and dc voltage supplies should be installed in non-metallic cabinets or properly insulated from metallic cabinets. Potentiometer shafts and switches should make use of insulated (plastic) knobs. In practical use, no metallic part of an "ac/dc" chassis should be exposed to touch, accidental or otherwise. When such circuits are tested outside of their cabinets, a line isolation transformer such as the RCA WP-25A Isotap should be used.

Performance of these circuits depends as much on the quality of the components selected and the care employed in layout and construction as on the circuits themselves. Good signal reproduction from receivers and amplifiers requires the use of good-quality speakers, transformers, chokes, and input sources (microphones, phonograph pickups, etc.).

Coils for the receiver circuits may be purchased at local parts dealers by specifying the characteristics required: for rf coils, the circuit position (antenna or interstage), tuning range desired, and tuning capacitances employed; for if coils or transformers, the intermediate frequency, circuit position (1st if, 2nd if, etc.), and, in some cases, the associated tube types; for oscillator coils, the receiver tuning range, the intermediate frequency, the type of converter tube, and the type of winding used (tapped or transformer-coupled).

The voltage ratings specified for capacitors are the minimum dc working voltages required. Paper, mica, or ceramic capacitors having higher voltage ratings than those specified may be used except insofar as the physical sizes of such capacitors may affect equipment layout. However, if electrolytic capacitors having substantially higher voltage ratings than those specified are used, they may not "form" completely at the operating voltage, with the result that the effective capacitances of such units may be below their rated value. The wattage ratings specified for resistors assume methods of construction that provide adequate ventilation; com-

compact installations having poor ventilation may require resistors of higher wattage ratings.

Circuits which work at very high frequencies or which are required to handle very wide bandwidths demand more than ordinary skill and experience in construction. Placement of component parts is quite critical and may require considerable experimentation. All rf leads to components including bypass capacitors must be kept short and must be prop-

erly dressed to minimize undesirable coupling and capacitance effects. Correct circuit alignment and oscillator tracking may require the use of a cathode-ray oscilloscope, a high-impedance vacuum-tube voltmeter, and a signal generator capable of supplying a properly modulated signal at the appropriate frequencies. Unless the builder has had considerable experience with broad-band, high-frequency circuits, he should not undertake the construction of such circuits.

### LIST OF CIRCUITS

|   | Page |
|---|------|
| <b>29-1</b> AC/DC Superheterodyne Radio Receiver .....  | 673  |
| <b>29-2</b> AM/FM Superheterodyne Radio Receiver .....  | 674  |
| <b>29-3</b> FM Tuner .....  | 678  |
| <b>29-4</b> Three-Stage IF Amplifier/Limiter and Detector .....   | 680  |
| <b>29-5</b> FM Stereo Multiplex Adapter .....   | 682  |
| <b>29-6</b> Preamplifier for Amateur Receiver (21-, 30-, and 50-MHz Amateur Bands and 27-MHz Citizens Band) ..... | 684  |
| <b>29-7</b> Code-Practice Oscillator .....  | 686  |
| <b>29-8</b> Intercommunication Set (With Master Unit and Two or More Remote Units) .....                          | 687  |
| <b>29-9</b> High-Fidelity Audio Amplifier (Class AB <sub>1</sub> ; Power Output, 15 Watts) .....                  | 688  |
| <b>29-10</b> High-Fidelity Audio Amplifier (Class AB <sub>1</sub> ; Power Output, 30 Watts) .....                 | 690  |
| <b>29-11</b> High-Fidelity Audio Amplifier (Class AB <sub>1</sub> ; Power Output, 50 Watts) .....                 | 692  |
| <b>29-12</b> Two-Channel Stereophonic Amplifier (Power Output, 1 Watt Each Channel) .....                         | 694  |
| <b>29-13</b> Microphone and Phonograph Amplifier (Power Output, 8 Watts) .....                                    | 695  |
| <b>29-14</b> Two-Channel Audio Mixer .....  | 696  |
| <b>29-15</b> Phonograph Amplifier (Power Output, 1 Watt) .....  | 697  |
| <b>29-16</b> Preamplifier for Magnetic Phonograph Pickup (With RIAA Equalization) .....                           | 698  |
| <b>29-17</b> High-Fidelity Preamplifier for Tape-Head Pickup (With NARTB Equalization) .....                      | 699  |
| <b>29-18</b> Preamplifier for Ceramic Phonograph Pickup (Cathode-Follower Output) .....                           | 700  |
| <b>29-19</b> Low-Distortion Preamplifier (For Low-Output, High-Impedance Microphones) .....                       | 701  |

|       |  |     |
|-------|--|-----|
| 29-20 | Bass and Treble Tone-Control Amplifier .....   | 702 |
| 29-21 | Electronic Volt-Ohm Meter .....  | 703 |
| 29-22 | Series-Type Stabilized Voltage Supply .....  | 706 |
| 29-23 | All-Purpose Power Supplies .....   | 707 |
| 29-24 | VHF Tuner (For Black-and-White TV Receiver) .....  | 709 |
| 29-25 | Video IF Amplifiers and Sound-Channel Circuits (For Black-and-White TV Receiver) .....                         | 712 |
| 29-26 | Video, AGC, and Sync Amplifiers, (For Black-and-White TV Receiver) .....                                       | 714 |
| 29-27 | Vertical and Horizontal Deflection Circuits and High-Voltage Rectifier (For Black-and-White TV Receiver) ..... | 716 |
| 29-28 | Low-Voltage and Heater Supply (For Black-and-White TV Receiver) .....  | 720 |
| 29-29 | Low-Voltage Power Supply, Degaussing Circuit, and Heater Connections (For Color TV Receiver) .....             | 722 |
| 29-30 | VHF Tuner (For Color TV Receiver) .....  | 724 |
| 29-31 | Video- and Sound-Channel Circuits (For Color TV Receiver) ....   | 727 |
| 29-32 | Sync, AGC, and Vertical-Deflection Circuits (For Color TV Receiver) .....                                      | 731 |
| 29-33 | Horizontal-Deflection Circuit and High-Voltage Power Supply (For Color TV Receiver) .....                      | 733 |
| 29-34 | Chroma Circuits (For Color TV Receiver) .....  | 737 |
| 29-35 | Picture Tube and Associated Circuits (For Color TV Receiver) ....  | 741 |

## MANUFACTURERS OF SPECIAL COMPONENTS AND MATERIALS REFERRED TO IN PARTS LIST

Allen-Bradley Co.  
1201 S. 2nd Street  
Milwaukee, Wis. 53204

Alpha Wire Corp.  
711 Lidgerwood Avenue  
Elizabeth, N. J. 07202

Arco Electronics, Inc.  
Community Drive  
Great Neck, N. Y. 11021

Freed Transformer Company, Inc.  
1795 Weirfield Street  
Brooklyn, N. Y. 11227

Knight Products  
Allied Radio Corp.  
100 N. Western Avenue  
Chicago, Ill. 60612

J. W. Miller Co.  
5917 S. Main Street  
Los Angeles, Calif. 90003

Moldite Electronics Corp.  
250 South Street  
Newark, N. J. 07114

Ohmite Manufacturing Co.  
3635 W. Howard Street  
Skokie, Ill. 60076

Stancor Electronics, Inc.  
3501 W. Addison Street  
Chicago, Ill. 60618


Thordarson-Meissner, Inc.  
Electronic Center  
7th and Belmont  
Mt. Carmel, Ill. 62863

Triad Distributor Div.  
Litton Industries  
305 N. Briant Street  
Huntington, Ind. 46750

United Transformer Corp.  
Div. Thompson-Ramo-Wooldridge,  
150 Varick Street  
New York, N. Y. 10013

Note: Components and materials identified by RCA stock numbers may be obtained through authorized RCA distributors.

## 29-1 AC/DC SUPERHETERODYNE RADIO RECEIVER

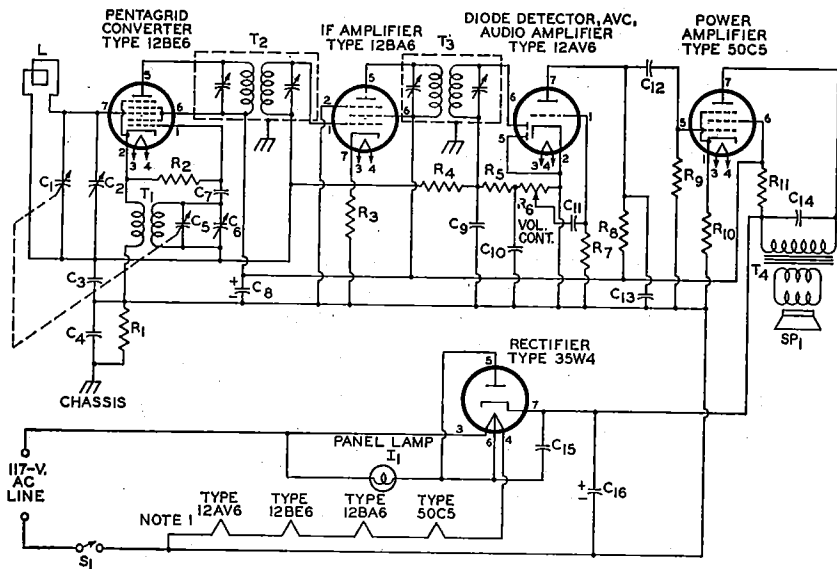

## Parts List

C<sub>1</sub>, C<sub>5</sub>=Ganged tuning capacitors; C<sub>1</sub>, 10-365 pF, C<sub>5</sub>, 7-115 pF

C<sub>2</sub>=Trimmer capacitor, 4-30 pF

C<sub>3</sub>=0.05  $\mu$ F, paper, 50 V

C<sub>4</sub>=0.1  $\mu$ F, paper, 400 V

C<sub>6</sub>=Trimmer capacitor, 2-17 pF

C<sub>7</sub>=56 pF, ceramic

C<sub>8</sub>=30  $\mu$ F, electrolytic, 150 V

C<sub>9</sub>, C<sub>10</sub>=150 pF, ceramic

C<sub>11</sub>, C<sub>13</sub>=0.02  $\mu$ F, paper, 400 V

C<sub>12</sub>=0.002  $\mu$ F, paper, 400 V

C<sub>15</sub>=330 pF, mica

C<sub>15</sub>=0.05  $\mu$ F, paper, 400 V

C<sub>16</sub>=50  $\mu$ F, electrolytic, 150 V

I<sub>1</sub>=Panel lamp, No. 40 or 47  
L=Loop antenna or ferrite-rod antenna, 540-1600 kHz (with specified values of capacitance for C<sub>1</sub> and C<sub>2</sub>)

R<sub>1</sub>=0.22 megohm, 0.5 watt

R<sub>2</sub>=33000 ohms, 0.5 watt

R<sub>3</sub>=100 ohms, 0.5 watt

R<sub>4</sub>=3.3 megohms, 0.5 watt

R<sub>5</sub>=47000 ohms, 0.5 watt

R<sub>6</sub>=Volume control, potentiometer, 0.5 megohm

R<sub>7</sub>=4.7 megohms, 0.5 watt

R<sub>8</sub>, R<sub>9</sub>=0.47 megohm, 0.5 watt

R<sub>10</sub>, R<sub>11</sub>=0.5 watt

R<sub>10</sub>=150 ohms, 0.5 watt

R<sub>11</sub>=1200 ohms, 1 watt

S<sub>1</sub>=On-off switch; single-pole, single-throw

SP<sub>1</sub>=Speaker

T<sub>1</sub>=Oscillator coil for use with 7-115 pF tuning capacitor and 455-kHz intermediate-frequency transformer

T<sub>2</sub>, T<sub>3</sub>=Intermediate-frequency transformers, 455 kHz (permeability-tuned type may be used)

T<sub>4</sub>=Output transformer for matching impedance of voice coil to 2500-ohm load

## Circuit Description

This basic five-tube superheterodyne radio receiver operates directly from an ac power line or a dc supply of 117 volts. AC power inputs are converted to dc power by the 35W4 half-wave rectifier circuit. The receiver uses a series heater arrangement. With ON-OFF switch S<sub>1</sub> closed, the heater string is connected directly across the 117-volt input terminals. A 6.3-volt panel lamp I<sub>1</sub>, connected between heater pins 3 and 6 of the 35W4

rectifier tube lights to indicate that power is applied to the receiver.

A ferrite-rod or loop antenna L and tuning capacitor C<sub>1</sub> select amplitude-modulated rf signals from the desired broadcast-band (550 to 1600 kHz) radio station and couple these signals to grid No. 3 (pin 7) of the 12BE6 pentagrid converter. A local-oscillator signal, developed by the resonant circuit formed by oscillator coil T<sub>1</sub> and variable capacitors C<sub>5</sub> and

## 29-1 AC/DC SUPERHETERODYNE RADIO RECEIVER (Cont'd)

### Circuit Description (Cont'd)

$C_0$ , is also applied to the 12BE6 pentagrid converter, at grid No. 1 (pin 1). The modulated-rf and local-oscillator signals are mixed across the nonlinear impedance of the converter tube to produce the 455-kHz intermediate frequency used in the receiver. The antenna and oscillator tuning capacitors  $C_1$  and  $C_5$  are mechanically ganged so that the antenna and oscillator resonant circuits can be adjusted together to maintain the 455-kHz difference frequency for any dial setting in the broadcast-frequency band. Trimmer capacitors  $C_2$  and  $C_3$  are adjusted to assure that the desired tracking relationship is maintained across the band. Positive feedback to sustain oscillations is inductively coupled by  $T_1$  from the cathode of the 12BE6 converter to the local-oscillator resonant circuit.

A single if stage, which uses a high-transconductance 12BA6 remote-cutoff pentode, provides the required amplification of the intermediate-frequency signals. This stage is made selective at 455 kHz by the double-tuned input and output transformers  $T_2$  and  $T_3$ . Audio-signal components are extracted from the if

signal by the second-detector circuit, which consists of the pin 6 diode section in the 12AV6 tube and associated components. (The pin 5 diode section of the 12AV6 is not used and is shorted to the tube cathode, pin 2.) The audio output from the detector is developed across the VOL. CONT. potentiometer  $R_6$ , which provides manual adjustment of the output sound level of the receiver. The detector also develops a negative dc voltage proportional to the rf input across a 150-picofarad capacitor  $C_6$  for automatic volume control in the receiver. This avc voltage is used as bias for the converter and if amplifier and automatically controls the gain of these stages.

The audio-signal voltage at the wiper arm of the VOL. CONT. potentiometer is amplified by the triode (audio-voltage-amplifier) section of the 12AV6 and is then used to drive the 50C5 audio output stage. The output stage develops the audio power required to produce an audible output from the speaker. Audio output transformer  $T_4$  matches the 2500-ohm plate-load impedance of the 50C5 to the speaker voice coil.

## 29-2 AM/FM SUPERHETERODYNE RADIO RECEIVER

### Circuit Description

This AM/FM radio receiver operates directly from either an ac power line or a dc supply of 117 volts. AC power inputs are converted to dc power by a 1N3756 silicon-rectifier half-wave power supply. The receiver uses a series heater string, which is connected across the 117-volt input when ON-OFF switch  $S_3$  and interlock  $S_2$  are closed. The interlock assures that power is automatically disconnected when the receiver is removed from the chassis.

AM or FM operation of the receiver is selected by means of switch  $S_1$ . For AM operation ( $S_1$  set to AM



position), amplitude-modulated rf signals in the AM broadcast band (550 to 1600 kHz) from the desired radio broadcast station are selected by antenna  $L_2$  and tuning capacitor  $C_{25}$ . These signals are amplified and converted to the 455-kHz AM intermediate frequency by the 12BE6 pentagrid converter. Tuning capacitors  $C_{25}$  and  $C_{27}$  are mechanically ganged so that the antenna and local-oscillator sections of the converter can be tuned simultaneously to maintain the 455-kHz difference frequency for any station setting. Trimmer adjustments are provided by variable capacitors  $C_{20}$  and  $C_{26}$ .



29-2

# AM/FM SUPERHETERODYNE RADIO RECEIVER (Cont'd)

RF AMP./FM CONV.

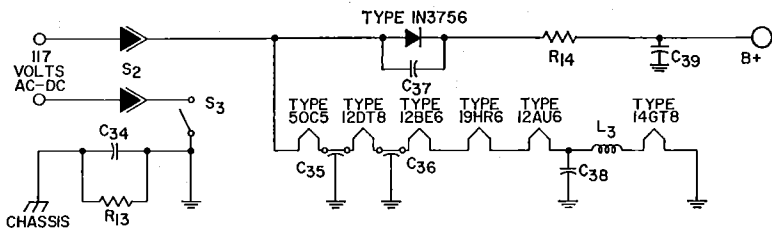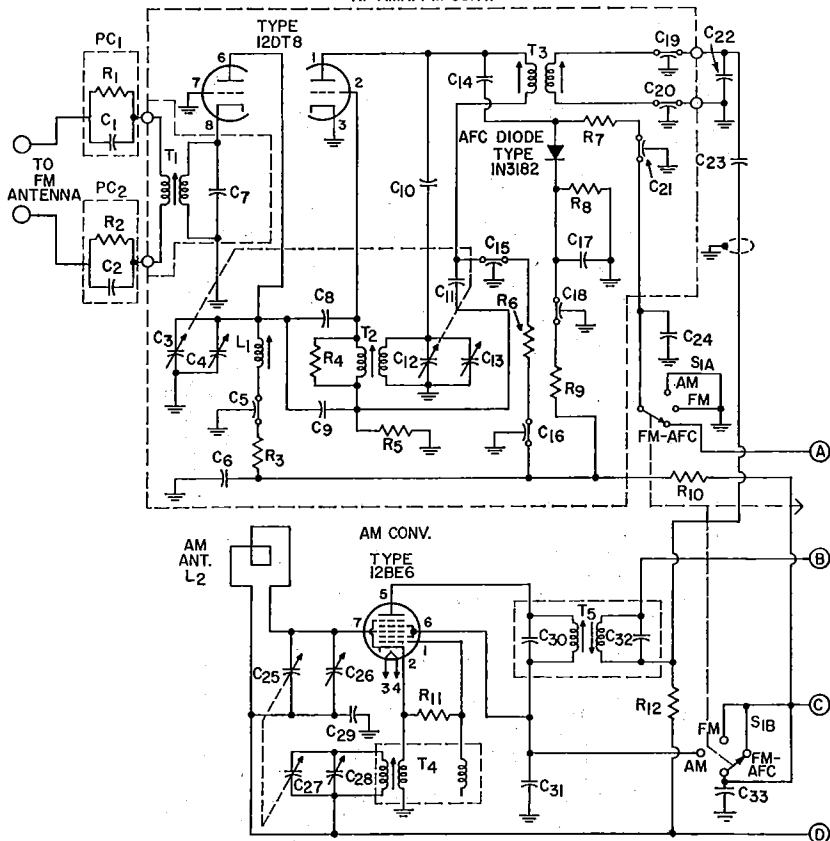


## Parts List

C<sub>1</sub> = Part of PC<sub>1</sub>  
 C<sub>2</sub> = Part of PC<sub>2</sub>  
 C<sub>3</sub>, C<sub>12</sub> = Ganged tuning capacitors; tune L<sub>1</sub> and T<sub>2</sub> to 88-108 MHz

C<sub>4</sub>, C<sub>13</sub> = Trimmer capacitors, 1-7 pF  
 C<sub>5</sub>, C<sub>18</sub>, C<sub>18</sub> = 1000 pF, feed-through, 500 V  
 C<sub>6</sub> = 0.1 μF, ceramic, 500 V

C<sub>7</sub> = 36 pF, ceramic, 500 V  
 C<sub>8</sub>, C<sub>14</sub> = 6.8 pF, ceramic, 500 V  
 C<sub>9</sub> = 11 pF, ceramic, 500 V  
 C<sub>10</sub> = 68 pF, ceramic, 500 V

## AM/FM SUPERHETERODYNE RADIO RECEIVER (Cont'd)

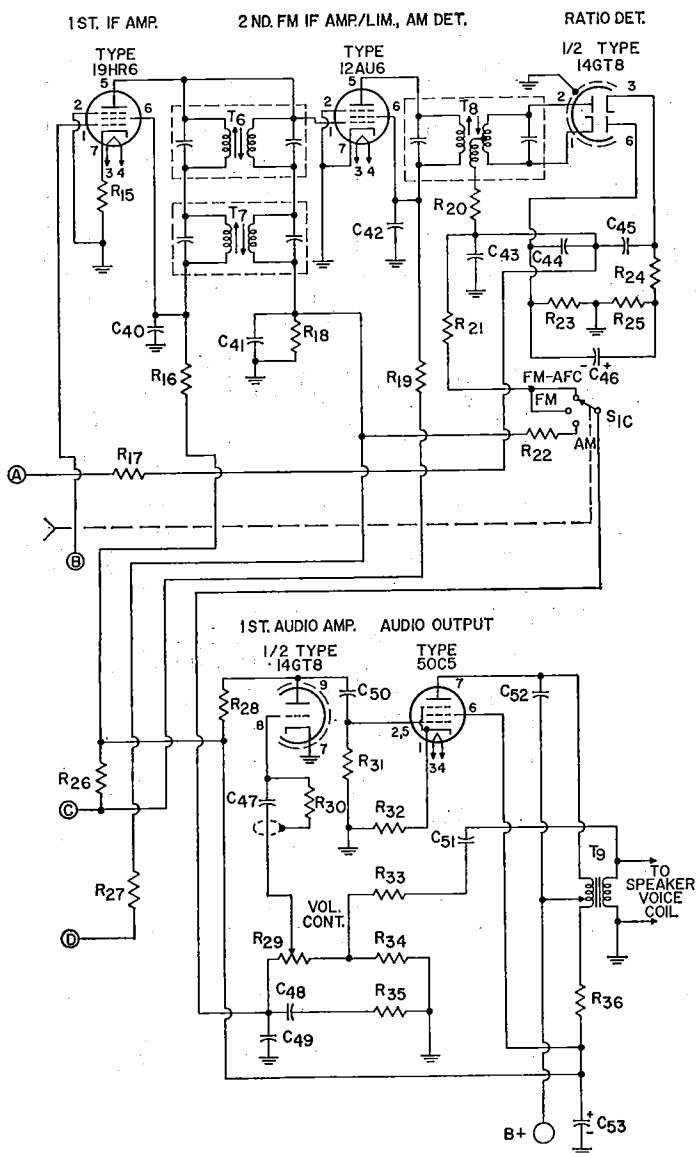

### Parts List (Cont'd)

C<sub>11</sub> = 21 pF, ceramic, 500 V  
 C<sub>16</sub> = 500 pF, feedthrough,  
 500 V  
 C<sub>17</sub> = 0.22 μF, ceramic disc,  
 500 V

C<sub>19</sub>, C<sub>20</sub> = 2 pF, feedthrough,  
 500 V  
 C<sub>21</sub>, C<sub>35</sub>, C<sub>36</sub> = 2000 pF,  
 feedthrough, 500 V

C<sub>22</sub> = IF transformer tuning  
 capacitor; value, with cable  
 capacitance, tunes T<sub>3</sub> to  
 10.7 MHz

29-2

**AM/FM SUPERHETERODYNE  
RADIO RECEIVER (Cont'd)****Circuit Description (Cont'd)**

With switch  $S_1$  in the FM or FM-AFC position, the FM tuner selects rf signals in the FM broadcast band (88 to 108 MHz) from the desired FM radio station, amplifies these signals, and converts them to the 10.7-MHz FM intermediate frequency. The rf-amplifier and converter stages of the tuner each use one section of a 12DT8 high- $\mu$  twin triode. Ganged tuning of the rf-amplifier and converter tuning capacitors,  $C_3$  and  $C_{12}$ , assures that the converter local-oscillator frequency tracks the input tuning at 10.7 MHz above the center frequency of the FM channel selected. Trimmer adjustments are provided by variable capacitors  $C_1$  and  $C_{13}$ .

The 19HR6 if amplifier is used in both FM and AM modes of operation. Depending upon the setting of selector switch  $S_1$ , this stage amplifies the frequency-modulated 10.7-MHz intermediate-frequency output from the FM converter or the amplitude-modulated 455-kHz intermediate-frequency signal from the AM converter. Additional amplification of FM if signals is provided by the 12AU6 pentode stage, which is used as a combination second FM if amplifier and noise limiter. A portion of the 12AU6 stage is also used as a second detector circuit to extract the audio-signal components from the 455-kHz AM if signals. For this demodulation function, the cathode and control grid of the 12AU6 are used as the detector diode. The 10.7-MHz FM if signals are demodulated and amplitude distortion is removed by a ratio detector that uses the diode sections of a 14GT8 twin diode—high-

$\mu$  triode. Good selectivity in the if amplifier and detector at 10.7 MHz is provided by the double-tuned transformers  $T_3$ ,  $T_6$ , and  $T_8$ , and at 455 kHz by the double-tuned transformers  $T_5$  and  $T_7$ .

Depending upon the mode of operation, a section of  $S_1$  selects the audio output from the AM detector or from the FM ratio detector. The selected audio output is amplified by an audio voltage amplifier which uses the high- $\mu$  triode section of a 14GT8 and a 50C5 audio output stage. The output stage provides the power necessary to produce the required speaker output. Transformer  $T_9$  matches the 2500-ohm plate impedance of the 50C5 to the speaker voice coil. Manual adjustment of the receiver output is provided by the VOL. CONT. potentiometer  $R_{20}$  in the control-grid circuit of the audio voltage amplifier.

A negative dc voltage proportional to the input signal level is developed across  $R_{18}$  and  $C_{11}$  during either AM or FM operation of the receiver. This voltage is applied as bias to the control grid (pin 1) of the 19HR6 if amplifier and the signal grid (pin 7) of the 12BE6 AM converter to provide automatic gain control of the receiver in each mode of operation. With  $S_1$  in the FM-AFC position, the 1N3182 AFC diode rectifies the voltage across the tertiary winding of the ratio-detector transformer  $T_8$ . The resultant frequency-sensitive voltage, applied to the plate resonant circuits of the FM rf-amplifier and converter stages, provides automatic frequency control in the FM tuner.

## 29-2

AM/FM SUPERHETERODYNE  
RADIO RECEIVER (Cont'd)

## Parts List (Cont'd)

C<sub>23</sub>=4700 pF, ceramic, 500 V  
 C<sub>24</sub>=0.15 μF, paper, 200 V  
 C<sub>25</sub>, C<sub>27</sub>=Ganged tuning capacitors; tune T<sub>1</sub> to 540-1650 kHz  
 C<sub>28</sub>, C<sub>29</sub>=Trimmer capacitors, 12 pF  
 C<sub>29</sub>, C<sub>33</sub>, C<sub>35</sub>, C<sub>47</sub>=0.01 μF, ceramic, 500 V  
 C<sub>30</sub>=Part of T<sub>5</sub>  
 C<sub>31</sub>, C<sub>19</sub>=1000 pF, ceramic, 500 V  
 C<sub>32</sub>=Part of T<sub>5</sub>  
 C<sub>34</sub>=0.1 μF, ceramic, 500 V  
 C<sub>37</sub>=0.047 μF, paper, 400 V  
 C<sub>39</sub>=80 μF, electrolytic, 150 V  
 C<sub>40</sub>, C<sub>42</sub>=2700 pF, ceramic, 500 V  
 C<sub>41</sub>, C<sub>43</sub>=100 pF, ceramic, 500 V, NFO  
 C<sub>44</sub>, C<sub>45</sub>=330 pF, mica, 500 V  
 C<sub>46</sub>=2 μF, electrolytic, 50 V  
 C<sub>48</sub>=0.01 μF, paper, 200 V  
 C<sub>50</sub>=5600 pF, ceramic, 500 V  
 C<sub>51</sub>=0.1 μF, paper, 200 V  
 C<sub>52</sub>=0.022 μF, paper, 200 V  
 C<sub>53</sub>=50 μF, electrolytic, 150 V  
 L<sub>1</sub>, L<sub>3</sub>=1 μH, rf coil

L<sub>2</sub>=Antenna, air-loop type with back cover  
 PC<sub>1</sub>, PC<sub>2</sub>=Printed circuit; includes 0.5 megohm, 0.25-watt resistor and 470-picofarad, 500-volt capacitor; RCA Stock No. 104328

R<sub>1</sub>=Part of PC<sub>1</sub>  
 R<sub>2</sub>=Part of PC<sub>2</sub>  
 R<sub>3</sub>=2200 ohms, 0.5 watt  
 R<sub>4</sub>=1200 ohms, 0.5 watt  
 R<sub>6</sub>, R<sub>21</sub>=33000 ohms, 0.5 watt  
 R<sub>6</sub>, R<sub>11</sub>=22000 ohms, 0.5 watt  
 R<sub>7</sub>, R<sub>28</sub>, R<sub>31</sub>=0.47 megohm, 0.5 watt  
 R<sub>8</sub>=3900 ohms, 0.5 watt  
 R<sub>9</sub>, R<sub>2</sub>=47000 ohms, 0.5 watt  
 R<sub>10</sub>=220 ohms, 0.5 watt  
 R<sub>12</sub>, R<sub>17</sub>=1 megohm, 0.5 watt  
 R<sub>13</sub>=0.22 megohm, 0.5 watt  
 R<sub>14</sub>=100 ohms, wire-wound, 4 watts  
 R<sub>15</sub>, R<sub>20</sub>=68 ohms, 0.5 watt  
 R<sub>16</sub>=4700 ohms, 0.5 watt  
 R<sub>18</sub>=0.33 megohm, 0.5 watt  
 R<sub>19</sub>, R<sub>24</sub>=1000 ohms, 0.5 watt  
 R<sub>23</sub>, R<sub>25</sub>=6800 ohms, 0.5 watt  
 R<sub>26</sub>=220 ohms, 0.5 watt

R<sub>27</sub>=3.3 megohms, 0.5 watt  
 R<sub>29</sub>=Volume control, potentiometer, 1 megohm, part of assembly with S<sub>3</sub>  
 R<sub>30</sub>=4.7 megohms, 0.5 watt  
 R<sub>32</sub>=150 ohms, 0.5 watt  
 R<sub>33</sub>=1500 ohms, 0.5 watt  
 R<sub>34</sub>=820 ohms, 0.5 watt  
 R<sub>35</sub>=3900 ohms, 0.5 watt  
 R<sub>36</sub>=560 ohms, 0.5 watt  
 S<sub>1</sub>=AM-FM-AFC selector; 3-section slide switch  
 S<sub>2</sub>=Interlock  
 S<sub>3</sub>=ON-OFF switch, part of assembly with R<sub>29</sub>  
 T<sub>1</sub>=FM antenna transformer  
 T<sub>2</sub>=FM oscillator transformer  
 T<sub>3</sub>, T<sub>6</sub>=FM if transformer, 10.7 MHz  
 T<sub>4</sub>=AM oscillator coil; with specified values of tuning and trimmer capacitance, tunes to 540 to 1600 kHz  
 T<sub>5</sub>, T<sub>7</sub>=AM if transformer, 455 kHz  
 T<sub>8</sub>=Ratio-detector transformer, 10.7 MHz  
 T<sub>9</sub>=Audio output transformer, matches impedance of speaker voice coil to 2500-ohm tube load

## 29-3

## FM TUNER

## Circuit Description


This three-stage FM tuner features a pair of 6CW4 nuvistor triodes operated in a low-noise, high-gain cascode rf-amplifier stage. The mixer and local-oscillator sections of the tuner use the pentode and triode sections, respectively, of a 6KE8 triode-pentode. The dc operating power for the tuner is obtained from a 180-volt, 20-milliampere supply. Power for the tube heaters is obtained from a 6.3-volt, 660-milliampere ac source.

The tuner uses a 300-ohm balanced antenna. Antenna transformer T<sub>1</sub> matches the 300-ohm antenna impedance to the input circuit of the cascode rf amplifier. Antenna tuning capacitor C<sub>1</sub> is adjusted to select the desired FM channel. The frequency-modulated rf signals are amplified by the cascode rf stage and coupled to

the control grid of the mixer stage. The local oscillator generates a signal, at a frequency 10.7 MHz above the center frequency of the selected FM channel, which is also applied to the control grid of the mixer stage. The rf and local-oscillator signals are mixed to produce the desired 10.7-MHz FM intermediate frequency. Ganged tuning of the antenna, mixer, and local-oscillator tuning capacitors, C<sub>4</sub>, C<sub>13</sub>, and C<sub>10</sub>, assures that the local-oscillator frequency tracks the input tuning at 10.7 MHz above the selected FM channel. Capacitors C<sub>6</sub>, C<sub>15</sub>, and C<sub>10</sub> are trimmer adjustments for the tuner. The double-tuned transformer T<sub>2</sub> selects the 10.7-MHz FM if signals at the plate of the mixer stages and couples them to the if-amplifier/limiter section of the FM receiver.

## 29-3

## FM TUNER (Cont'd)

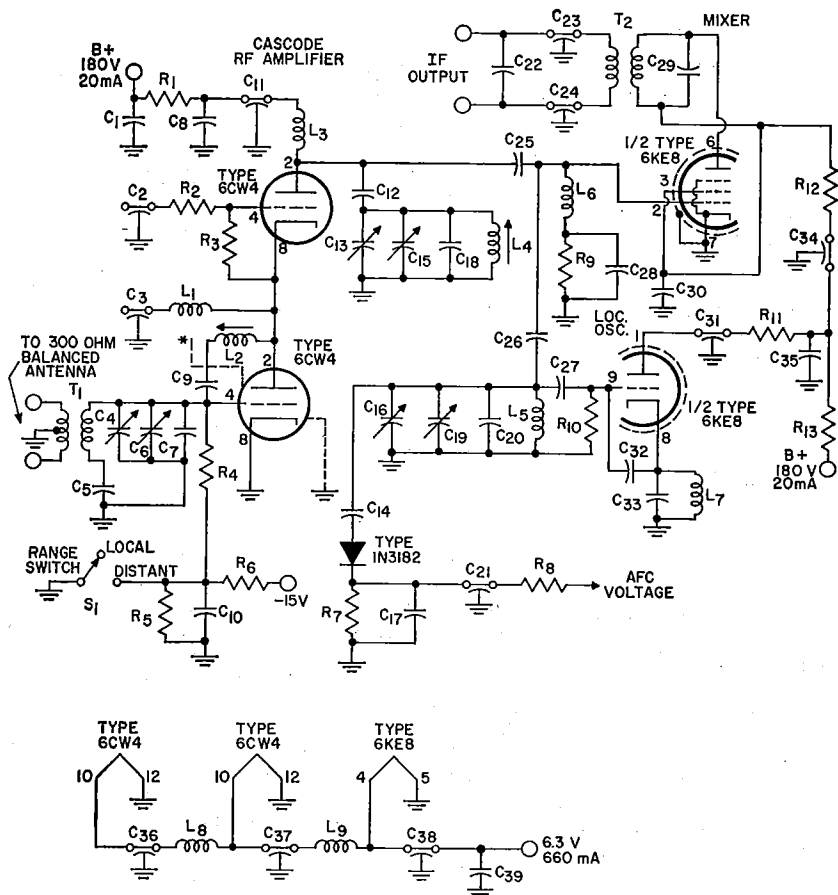

\* A metal shield should be provided between grid and plate terminals on the 6CW4 socket.

## Parts List

C1, C8, C38, C39=0.01  $\mu$ F, ceramic disc, 400 V

C2, C31=2000 pF, feedthrough, 400 V

C3, C11, C21, C34, C38, C37, C38=1000 pF feedthrough, 400 V

C4, C13, C10=Ganged tuning capacitor; 6.6-23 pF, 400 V; Miller No. 1461-BS or equiv.

C5, C9, C28=1000 pF, ceramic, 400 V

C6, C15, C19=Trimmer capacitors, 1-7.5 pF, ceramic, 400 V

C7, C18, C35=10 pF, ceramic, 400 V

C10=2000 pF, ceramic disc, 400 V

C12, C30=2000 pF, ceramic, 400 V

C14, C32=6.8 pF, ceramic, 400 V

C17=0.22  $\mu$ F, ceramic, 400 V

C20=18 pF, ceramic, 400 V

C22=Capacitor inserted in place of tuning capacitor in secondary winding of T2; value with cable capacitance tunes output circuit of tuner to 10.7 MHz

C23, C24=2 pF feedthrough, 400 V

C25=22 pF, ceramic, 400 V

C26=2.2 pF, ceramic, 400 V

C27=47 pF, ceramic, 400 V

C29=Part of T2

L1=RF coil, 5 turns of No. 22 enamel wire close-

wound on  $\frac{1}{4}$ -inch-diameter coil form

L2=RF coil, 12 turns of No. 22 enamel wire close-

wound on  $\frac{1}{4}$ -inch-diameter slug-tuned coil form; tuning slug =  $\frac{3}{8}$ -inch-long Moldite No. 5101 ferrite or equiv.

L3=RF choke, 4  $\mu$ H, J. W. Miller No. 70F396A1 or equiv.

L4=RF coil, 3 turns of No. 16 enamel wire wound

double-spaced on  $\frac{1}{4}$ -inch-diameter slug-tuned coil

form; tuning slug =  $\frac{3}{8}$ -inch-long Moldite No. 5101 ferrite or equiv.

L5=RF coil, 1- $\frac{1}{2}$  turns of No. 16 enamel wire close-

## 29-3

## FM TUNER (Cont'd)

## Parts List (Cont'd)

wound on  $\frac{1}{4}$ -inch-diameter slug-tuned coil form; tuning slug= $\frac{3}{8}$ -inch-long Moldite No. 5101 ferrite or equiv.  
 $L_0$ =RF choke, 2 $\mu$ H, Ohmite No. Z144 or equiv.  
 $L_7$ =RF coil; 0.4  $\mu$ H; 20 turns of No. 26 enamel wire close-wound on a 0.47 megohm, 0.5-watt Allen-Bradley resistor or resistor of equivalent physical size  
 $L_8$ ,  $L_9$ =RF chokes; 1 $\mu$ H; 25 turns of No. 24 enamel wire close-wound on a 0.47-megohm, 1-watt Allen-

Bradley resistor or resistor of equivalent physical size  
 $R_1$ ,  $R_{18}$ =220 ohms, 0.5 watt  
 $R_2$ =5 ohms, 0.5 watt  
 $R_3$ ,  $R_9$ =0.47 megohm, 0.5 watt  
 $R_4$ ,  $R_6$ ,  $R_8$ =47000 ohms, 0.5 watt  
 $R_5$ =0.1 megohm, 0.5 watt  
 $R_7$ =3900 ohms, 0.5 watt  
 $R_{10}$ =22000 ohms, 0.5 watt  
 $R_{11}$ =4700 ohms, 0.5 watt  
 $R_{12}$ =15000 ohms, 0.5 watt  
 $S_1$ =AM/FM range switch; open position is used for local stations, closed position for distant stations

$T_1$ =Antenna transformer; primary: 2 turns of No. 32 wire with type B nylon insulation, Alpha No. 1860 or equivalent, center-tapped; secondary: 3 turns of No. 16 enamel wire; wound double-spaced on  $\frac{1}{4}$ -inch-long coil form; tuning slug =  $\frac{3}{8}$ -inch-long Moldite No. 5101 ferrite or equiv.  
 $T_2$ =FM if transformer, 10.7 MHz; J. W. Miller 1451 or equiv.; capacitor in secondary should be replaced by  $C_{23}$

Note: See general considerations for construction of high-frequency and broadband circuits on page 671.

## 29-4

## THREE-STAGE IF AMPLIFIER/LIMITER AND DETECTOR

For Monaural or Stereo Tuner

## Circuit Description


This three-stage if amplifier/limiter and detector circuit, when used with a front-end circuit such as that shown in circuit 25-3, makes possible an over-all tuner gain of 35 dB. The over-all bandwidth of the if-amplifier stages, between the 6-dB-down points, is 300 kHz, and the peak separation of the detector is 440 kHz. The circuit provides a signal-to-noise ratio of 20 dB for an input of 2.8 microvolts or 30 dB for an input of 4.1 microvolts. The 6HR6 and 6HS6 pentodes used in the if-amplifier stages have very high transconductance and a grid-No.1-to-plate capacitance substantially less than 0.01 picofarad and are, therefore, especially suited for use in FM if amplifiers and television sound if amplifiers. These pentodes operate from a 180-volt, 25-milliamper dc supply. Heater power for the pentodes and for the 6AL5 twin diode used in the ratio detector is obtained from a 6.3-volt ac source.

The frequency-modulated, 10.7-MHz intermediate-frequency signal from the mixer stage in the FM tuner is applied to the control grid of the first if-amplifier stage. This signal is amplified by the three transformer-

coupled amplifier stages and applied by transformer  $T_3$  to the ratio detector. The doubled-tuned coupling transformers  $T_1$ ,  $T_2$ , and  $T_3$  provide the selectivity at 10.7 MHz and the band-pass characteristics required for optimum transfer of the frequency-modulated signal. Circuit stability is improved by the use of unbypassed cathode resistors in each amplifier stage. The first two if stages are basically amplifiers, although they provide some saturation limiting of large-level signals. The 3300-ohm screen-grid dropping resistors ( $R_2$  and  $R_4$ ) reduce the screen-grid voltages in these stages to obtain the desired limiting characteristics. The 6HR6 pentode used in the first if amplifier is a remote-cutoff tube and, if desired, this stage may be operated with age bias. The 6HS6 pentodes used in the second and third if stages are sharp-cutoff tubes. In addition, the screen-grid voltage divider network ( $R_7$  and  $R_8$ ) for the third stage substantially reduces the screen-grid voltage so that the stage will provide both cutoff and saturation limiting of large-level signals. The limiting in the if stages helps remove any amplitude modulation from the frequency-mod-

29-4

### THREE-STAGE IF AMPLIFIER/LIMITER AND DETECTOR (Cont'd)

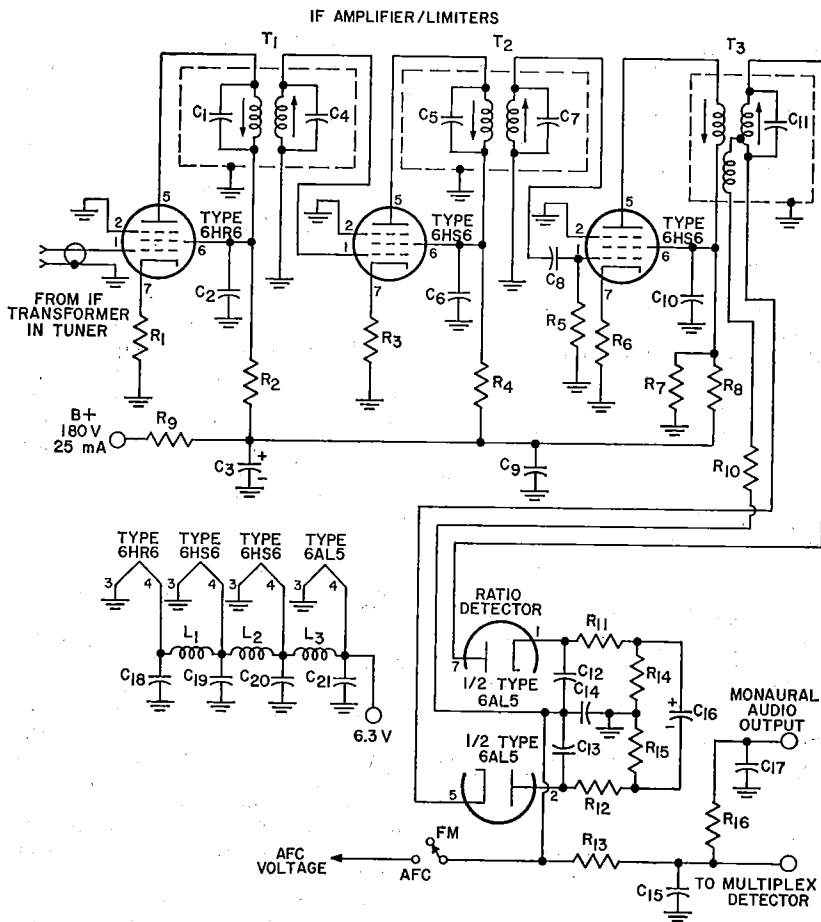

#### Parts List

C<sub>1</sub>, C<sub>4</sub>—Part of T<sub>1</sub>  
 C<sub>2</sub>, C<sub>6</sub>—2200 pF, ceramic disc, 400 V  
 C<sub>3</sub>—50 μF, electrolytic, 450 V  
 C<sub>5</sub>, C<sub>7</sub>—Part of T<sub>2</sub>  
 C<sub>8</sub>—47 pF, ceramic disc, 400 V  
 C<sub>9</sub>, C<sub>18</sub>, C<sub>19</sub>, C<sub>20</sub>, C<sub>21</sub>—0.01 μF, ceramic disc, 400 V  
 C<sub>10</sub>—1500 pF ceramic disc, 400 V  
 C<sub>11</sub>—Part of T<sub>3</sub>

C<sub>12</sub>, C<sub>13</sub>, C<sub>15</sub>—330 pF, ceramic disc, 400 V  
 C<sub>14</sub>—100 pF, ceramic disc, 400 V  
 C<sub>16</sub>—2 μF, electrolytic, 400 V  
 C<sub>17</sub>—1000 pF, ceramic disc, 400 V  
 L<sub>1</sub>, L<sub>2</sub>, L<sub>3</sub>—1 μH  
 R<sub>1</sub>, R<sub>3</sub>—68 ohms, 0.5 watt  
 R<sub>2</sub>, R<sub>4</sub>, R<sub>13</sub>—3300 ohms, 0.5 watt  
 R<sub>5</sub>—0.1 megohm, 0.5 watt

R<sub>9</sub>, R<sub>10</sub>—100 ohms, 0.5 watt  
 R<sub>7</sub>—15000 ohms, 0.5 watt  
 R<sub>8</sub>—22000 ohms, 0.5 watt  
 R<sub>6</sub>—2200 ohms, 3 watts  
 R<sub>11</sub>—1200 ohms, 0.5 watt  
 R<sub>12</sub>—390 ohms, 0.5 watt  
 R<sub>14</sub>, R<sub>15</sub>—6800 ohms, 0.5 watt  
 R<sub>16</sub>—68000 ohms, 0.5 watt  
 T<sub>1</sub>, T<sub>2</sub>—IF transformers, 10.7 MHz  
 T<sub>3</sub>—Ratio-detector transformer, 10.7 MHz

Note: Tube shields may be required if regeneration is encountered. See general considerations for construction of high-frequency and broad-band circuits on page 671.

29-4

### THREE-STAGE IF AMPLIFIER/LIMITER AND DETECTOR (Cont'd)

#### Circuit Description (Cont'd)

ulated signals.

The 6AL5 ratio-detector circuit provides additional noise limiting of the FM signal and demodulates this signal to recover the audio information. The detector circuit provides the

input to the audio amplifiers of a monaural receiver or to the multiplex detector in a stereo system. The RC network ( $R_{16}$  and  $C_{17}$ ) in the monaural output lead provides the desired de-emphasis of high audio frequencies.

29-5

### FM STEREO MULTIPLEX ADAPTER

#### Circuit Description

This FM stereo multiplex adapter demodulates composite multiplex signals from an FM tuner and separates these signals into left- and right-channel inputs for stereo audio-output stages. The dc operating power for the 12AX7A and 6CL8A twin triodes used in the adapter circuit is obtained from a 180-volt, 15-milliamperere supply. Power for the dual heaters of the 12AX7A and the single heater of the 6CL8A is obtained from a 6.3-volt source.

The composite signal applied to the multiplex adapter from the ratio detector (or discriminator) in an FM receiver includes a 19-kHz pilot-frequency (multiplex-reference) component and sum ( $L + R$ ) and difference ( $L - R$ ) components of left- and right-channel audio signals. The  $L + R$  signal is the demodulated in-phase combination of the left- and right-channel audio information used to modulate the main carrier frequency of the receiver. The  $L - R$  signal is the out-of-phase combination of the left- and right-channel information and is used to amplitude-modulate a 38-kHz subcarrier. This subcarrier is suppressed in the FM tuner so that only the  $L - R$  sideband components of the amplitude-modulated signal remain.


The composite input signal is amplified by the 12AX7A triode section in the input stage of the adapter. The high input impedance of this stage prevents excessive loading of the ratio detector. The 67-kHz trap ( $L_1$  and  $C_2$ ) in the cathode circuit of this

stage eliminates any SCA (storecast allocation) signal components that may be included in the composite signal. The composite signal is coupled from the plate of the input stage to the control grid of the 6CL8A triode section used in a signal-separation driver. This stage operates as a cathode follower for the  $L + R$  audio components and the  $L - R$  subcarrier sideband components. The  $L + R$  audio components are developed across the MATRIX BALANCE ADJ. potentiometer  $R_{18}$  and coupled from the wiper arm of this potentiometer to the output resistor matrix network  $R_{10}$  through  $R_{22}$ . A 3300-picofarad capacitor  $C_{10}$  in the coupling circuit filters out any 19-kHz pilot-frequency components or 38-kHz subcarrier sideband components that may be developed across potentiometer  $R_{18}$ . The  $L - R$  sideband components are coupled from the cathode of the signal-separation driver to the center tap of the secondary winding of the transformer  $T_2$  in the peak detector. The 38-kHz band-pass coil  $L_2$  and the 67-kHz series-resonant trap  $C_3$  and  $L_3$  assure maximum signal transfer of the  $L - R$  sideband components with minimum interference from storecast signals.

The 19-kHz double-tuned transformer  $T_1$  in the plate circuit of the signal-separation driver presents a highly selective load to the 19-kHz pilot-frequency component included in the composite multiplex signal and couples this 19-kHz component to the pilot-frequency doubler. The doubler



## 29-5 FM STEREO MULTIPLEX ADAPTER (Cont'd)

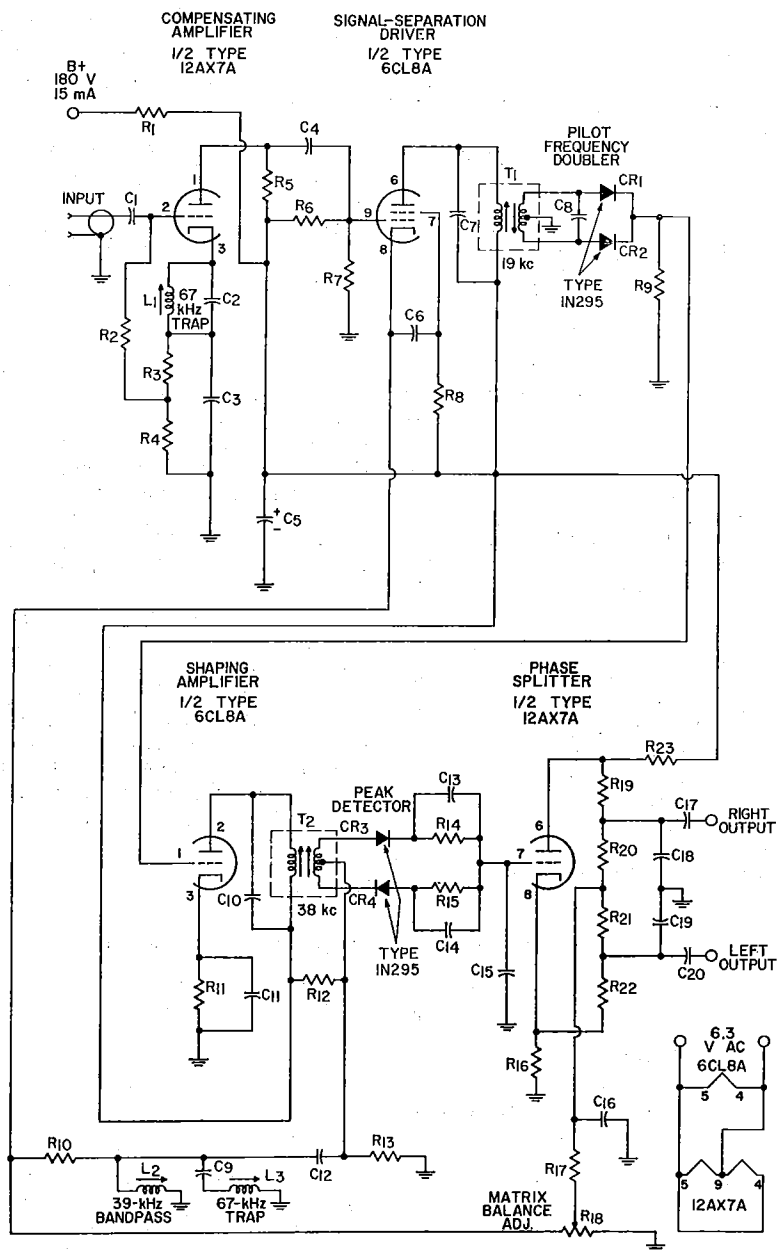

## 29-5 FM STEREO MULTIPLEX ADAPTER (Cont'd)

## Parts List

C<sub>1</sub>, C<sub>11</sub>, C<sub>12</sub>, C<sub>13</sub>, C<sub>14</sub>, C<sub>17</sub>,  
C<sub>20</sub>=0.01  $\mu$ F, ceramic,  
500 V  
C<sub>2</sub>, C<sub>9</sub>=2200 pF, film,  
500 V, N150  
C<sub>3</sub>, C<sub>18</sub>, C<sub>19</sub>=270 pF, ceramic,  
500 V, N750  
C<sub>4</sub>=0.047  $\mu$ F, paper, 200 V  
C<sub>5</sub>=40  $\mu$ F, electrolytic, 450 V  
C<sub>6</sub>=0.22  $\mu$ F, paper, 400 V  
C<sub>7</sub>, C<sub>8</sub>=1500 pF, film, 500 V,  
N150  
C<sub>10</sub>=1000 pF, film, 500 V,  
N150  
C<sub>16</sub>=470 pF, ceramic, 500 V  
C<sub>15</sub>=3300 pF, ceramic, 500 V  
L<sub>1</sub>, L<sub>3</sub>=RF coil, 67-kHz trap.

RCA stock No. 111047  
or equiv.  
L<sub>2</sub>=RF coil, 38-kHz band-  
pass, RCA stock No.  
111048 or equiv.  
R<sub>1</sub>=330 ohms, 1 watt  
R<sub>2</sub>=0.56 megohm, 0.5 watt  
R<sub>3</sub>=1500 ohms, 0.5 watt  
R<sub>4</sub>=15000 ohms, 0.5 watt  
R<sub>5</sub>=68000 ohms, 0.5 watt  
R<sub>6</sub>=3.9 megohms, 0.5 watt  
R<sub>7</sub>=1 megohm, 0.5 watt  
R<sub>8</sub>, R<sub>10</sub>=10000 ohms,  
0.5 watt  
R<sub>9</sub>, R<sub>14</sub>, R<sub>15</sub>=47000 ohms,  
0.5 watt

R<sub>11</sub>=4700 ohms, 0.5 watt  
R<sub>12</sub>=1.2 megohms, 0.5 watt  
R<sub>13</sub>=0.15 megohm, 0.5 watt  
R<sub>16</sub>, R<sub>17</sub>, R<sub>23</sub>=22000 ohms,  
0.5 watt  
R<sub>18</sub>=Potentiometer, balance  
adjustment, 10000 ohms,  
RCA stock No. 111044  
or equiv.  
R<sub>19</sub>, R<sub>20</sub>, R<sub>21</sub>, R<sub>22</sub>=0.1  
megohm, 0.5 watt  
T<sub>1</sub>=19-kHz transformer,  
RCA stock No. 111045  
or equiv.  
T<sub>2</sub>=38-kHz transformer,  
RCA stock No. 111046  
or equiv.

Note: See general considerations for construction of high-frequency and broadband circuits on page 671.

## Circuit Description (Cont'd)

circuit, which consists of two 1N295 diodes (CR<sub>1</sub> and CR<sub>2</sub>) in a full-wave rectifier configuration, doubles the pilot frequency to regenerate the 38-kHz subcarrier required for demodulation of the L - R sideband components.

The 38-kHz output of the doubler is amplified by the 6CL8A triode section used in the shaping amplifier and reshaped to a sine wave by the tuned primary of the peak detector transformer T<sub>2</sub>. In the secondary of T<sub>2</sub>, the 38-kHz subcarrier is recombined with the L - R sideband components from the cathode of the signal-separation driver. This combined signal is then demodulated by the 1N295 detector diodes CR<sub>2</sub> and CR<sub>1</sub> to obtain the L - R audio signal.

The L - R audio signal is applied to the control grid of the 6CL8A section used in a phase-splitter circuit.

The cathode and plate outputs of the phase splitter are equal in amplitude and opposite in phase so that one output represents an L - R signal and the other output represents a - L + R signal. These signals are applied to the output-resistor matrix network where they are added to the L + R audio signal from the cathode circuit of the signal-separation driver. In the summation of the L + R and L - R audio signal, the R components are canceled, and the resultant obtained is the left-channel audio output. The summation of the L + R and - L + R signals results in cancellation of the L components so that only the right-channel audio output is obtained. These outputs are then applied to the stereo receiver left- and right-channel audio-output stages, respectively.

## 29-6 PREAMPLIFIER FOR AMATEUR RECEIVER


For 15-, 10-, and 6-Meter (21-, 30-, and 50-MHz)  
Amateur Bands and 27-MHz Citizens Band

## Circuit Description

In this preamplifier, two 6CW4 high- $\mu$  nuvistor triodes are used in a high-gain, low-noise cascode rf-amplifier stage that adds 25 to 35 dB of gain ahead of a receiver operated on the 6-, 10-, or 15-meter amateur band or on the 27-MHz citizens band. This added gain, together with the

low noise figure (approximately 5 dB) of the preamplifier, substantially increases both the sensitivity and the signal-to-noise ratio of the receiver. The preamplifier operates from a dc plate supply of 150 volts at 5 milliamperes. The tube heaters require an ac power input of 6.3 volts at 0.26

## 29-6 PREAMPLIFIER FOR AMATEUR RECEIVER (Cont'd)

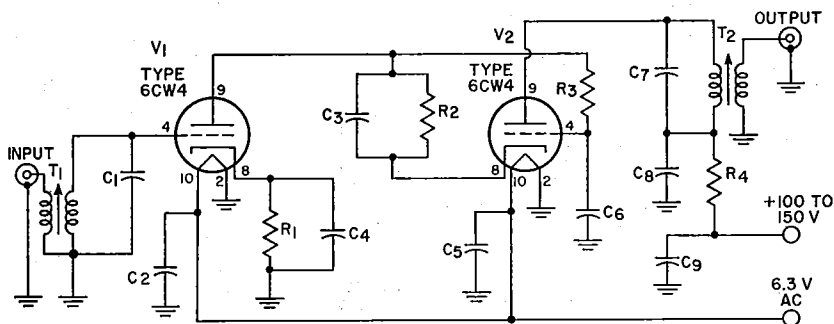

ALIGNMENT DATA

| Operating Frequency | Tune T <sub>1</sub> to: | Tune T <sub>2</sub> to: |
|---------------------|-------------------------|-------------------------|
| 21 MHz              | 21.25 MHz               | 21.22 MHz               |
| 27 MHz              | 30 MHz                  | 27 MHz                  |
| 30 MHz              | 32 MHz                  | 29.5 MHz                |
| 50 MHz              | 51 MHz                  | 50 MHz                  |

## Parts List

C<sub>1</sub>, C<sub>7</sub>—See Note 1  
 C<sub>2</sub>, C<sub>3</sub>, C<sub>4</sub>, C<sub>5</sub>, C<sub>6</sub>, C<sub>8</sub>,  
 C<sub>9</sub>—0.001 μF, 500 V,  
 ceramic

R<sub>1</sub>, R<sub>2</sub>—100 ohms, 0.5 watt

R<sub>3</sub>—0.47 megohm, 0.5 watt

R<sub>4</sub>—1000 ohms, 0.5 watt

T<sub>1</sub>—Input transformer (slug-tuned); matches preamplifier to 52-ohm input line (for 300-ohm input line, double number of turns in

primary); wound from #32 copper enamel wire on slug-tuned form having ¼-inch outer diameter; primary, 1½ turns; secondary, 18 turns for operation at 21, 27, or 30 MHz or 10 turns for operation at 50 MHz  
 T<sub>2</sub>—Output transformer (slug-tuned); matches preamplifier to 72-ohm output lines (use of other than a

72-ohm line between preamplifier output and receiver input is not recommended); wound from #32 copper enamel wire on slug-tuned form having ¼-inch outer diameter; primary, 18 turns for operation at 21, 27, or 30 MHz or 10 turns for operation at 50 MHz, secondary, 1½ turns.

- Notes: 1. For operation at 21 or 27 MHz, use 6.8-pF 500-volt capacitors for C<sub>1</sub> and C<sub>7</sub>; for operation at 30 MHz, use 5-pF 500-volt capacitors for C<sub>1</sub> and C<sub>7</sub>; for operation at 50 MHz, use 5-pF 500-volt capacitor for C<sub>1</sub> and 6.8-pF 500-volt capacitor for C<sub>7</sub>.  
 2. See general considerations for construction of high-frequency and broadband circuits on page 671.

## Circuit Description (Cont'd)

ampere. These small power requirements can usually be provided by the receiver.

Input transformer T<sub>1</sub> matches the high input impedance of the preamplifier to a 72-ohm or 300-ohm antenna. When a 72-ohm antenna is used, the primary of T<sub>1</sub> consists of a 1½-turn link wound about the hot end of the secondary coil. For a 300-ohm antenna, a 3-turn link is used. The secondary of T<sub>1</sub> is an 18-turn coil for operation at 10 or 15 meters or on the citizens band. At 6 meters, a 10-turn secondary coil is used. The unit is normally connected to the antenna

cable by means of a coaxial connector. If a balanced antenna system is used, however, terminal strips for the twin leads may be used instead of the coaxial connector. In this latter case, the input link (primary of T<sub>1</sub>) is not grounded.

Nuvistors V<sub>1</sub> and V<sub>2</sub> are operated in a stacked (cascode) arrangement in series with the B+ supply. The input is coupled by T<sub>1</sub> to the control grid of V<sub>1</sub>, which is essentially a grounded-cathode amplifier. The output of V<sub>1</sub> is applied to the cathode of V<sub>2</sub>, which is basically a grounded-grid amplifier. The inherent stability

## 29-6 PREAMPLIFIER FOR AMATEUR RECEIVER (Cont'd)

## Circuit Description (Cont'd)


of this type of arrangement, together with the ample decoupling and bypassing networks included in the circuit, provides assurance that the preamplifier will not break into oscillation.

The output of  $V_3$  is developed across the primary coil of output transformer  $T_2$ . This coil is identical

to the secondary coil of input transformer  $T_1$ . The secondary of  $T_2$  consists of a  $1\frac{1}{2}$ -turn link about the primary coil. This link matches the output of the preamplifier to a 75-ohm receiver input cable. (The maximum length of coaxial cable between receiver and preamplifier should not exceed 12 inches.)

## 29-7

## CODE-PRACTICE OSCILLATOR

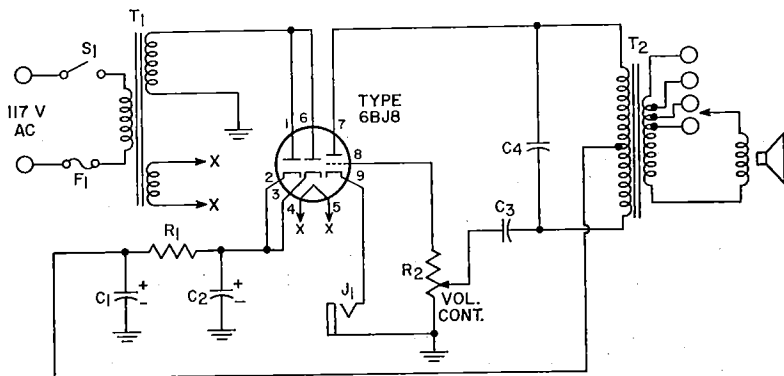

Note: Any two terminals of the secondary of  $T_2$  that give the desired tone may be selected. Adjustment of volume control may cause a slight change in tone.

## Parts List

$C_1, C_2=20 \mu\text{F}$ , electrolytic, 150 V  
 $C_3=0.001 \mu\text{F}$ , paper, 200 V  
 $C_4=0.03 \mu\text{F}$ , paper, 200 V  
 $F=1/8$  ampere

$J_1$ =Input jack for key  
 $R_1=1500$  ohms, 1 watt  
 $R_2$ =Potentiometer, 0.1 megohm, 0.5 watt

$T_1$ =Power transformer, 125 volts rms, 15 ma; 6.3 volts, 0.6 ampere  
 $T_2$ =Output transformer, universal

## Circuit Description

This code-practice oscillator operates from a 117-volt ac power line. When ON-OFF switch  $S_1$  is closed, the 117-volt ac input power is stepped up to 125 volts across the upper secondary winding of power transformer  $T_1$  and is stepped down to 6.3 volts across the lower secondary winding. The 6.3-volt winding provides the operating power for the heater of the 6BJ8 twin diode-triode used in the circuit. The diode sections of the 6BJ8 are connected to operate as a single diode in a half-wave rectifier circuit that converts the ac power across the

125-volt winding of  $T_1$  to dc operating power for the 6BJ8 triode section. This triode section is used as the amplifier tube in a simple audio-oscillator stage.

Operation of the oscillator stage is controlled by a telegraph key, which is connected into the circuit by means of jack  $J_1$ . When the key is closed, the triode section of the 6BJ8 supplies energy to the oscillator resonant circuit formed by capacitor  $C_3$  and the effective inductance of the primary of output transformer  $T_2$ . This circuit then resonates to pro-

## 29-7 CODE-PRACTICE OSCILLATOR (Cont'd)

## Circuit Description (Cont'd)

duce an audio signal that is coupled by transformer  $T_2$  to the speaker to produce an audible indication of the keying. Positive feedback to sustain oscillation is developed by the auto-transformer action of the tapped primary of transformer  $T_2$ .


Output transformer  $T_2$  is a universal type which contains multiple taps on the secondary winding. These taps enable the transformer to match the oscillator output impedance to

different values of speaker voice-coil impedance. The speaker impedance and transformer terminals used, however, affect the effective inductance in the primary of  $T_1$  and, thus, the tone of the audio output. Volume-control potentiometer  $R_2$  adjusts the level of the audio output. Adjustment of potentiometer  $R_2$  varies the loading on the oscillator resonant circuit and may also cause a slight change in the tone of the audio output.

## 29-8

## INTERCOMMUNICATION SET

With Master Unit and Two or More Remote Units

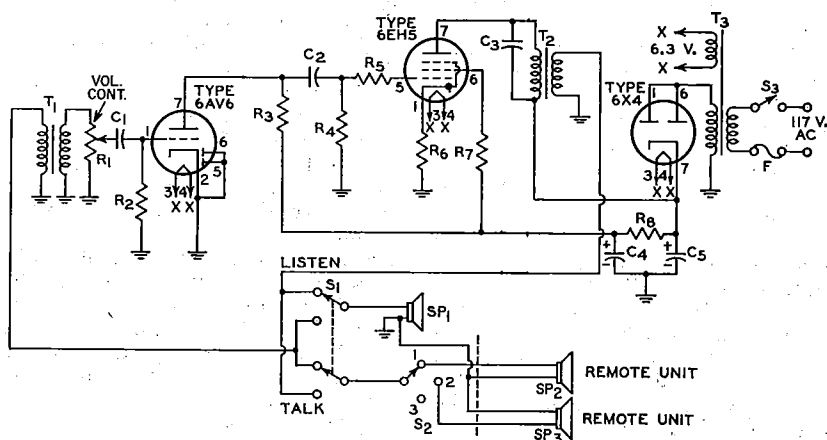

- Notes: 1. The leads from the LISTEN-TALK switch  $S_1$  to  $T_1$  and  $T_2$  should be kept as far apart as possible to prevent undesirable regenerative effects.  
2. Connections to the remote speaker units should be made with low-resistance wire, preferably with shielded "intercom" cable.

## Parts List

$C_1, C_2=0.0022 \mu\text{F}$ , paper, 200 V.

$C_3=0.005 \mu\text{F}$ , paper, 200 V.  
 $C_4, C_5=60 \mu\text{F}$ , electrolytic, 150 V.

$F_1$ =Fuse, 1 ampere

$R_1$ =Volume control, potentiometer, 0.5 megohm, audio taper, attached to switch  $S_3$

$R_2=6.8$  megohms, 0.5 watt

$R_3, R_4=0.47$  megohm, 0.5 watt

$R_5=10000$  ohms, 0.5 watt

$R_6, R_7=68$  ohms, 0.5 watt

$R_8=2200$  ohms, 1 watt

$S_1$ =Talk-listen switch, double-pole, double-throw  
 $S_2$ =Station Selector, rotary switch

$S_3$ =On-off switch, single-pole, single-throw; attached to volume-control potentiometer

$SP_1, SP_2, SP_3$ =Speaker; permanent-magnet; voice-coil impedance, 3 to 4 ohms

$T_1$ =Input transformer, 4-ohm primary, 25000-ohm secondary, Knight 54A1492 or equiv.

$T_2$ =Output transformer, 3000-ohm primary, 4-ohm secondary, Knight 54A2371 or equiv.

$T_3$ =Power transformer, 125 volts rms, 50 mA., 6.3 volts rms, 2 amperes, Knight 54A1411 or equiv.

## 29-8 INTERCOMMUNICATION SET (Cont'd)

### Circuit Description

This simple "intercom" set can be used to achieve reliable voice communications, at normal speaking levels, between any two points in a normal-size house. The system consists of a master unit, centrally located at the hub of household activity, interconnected by low-loss cabling to remote units located at points (e.g., garage, attic, and cellar) beyond the range of normal voice levels. An audio amplifier, which includes a 6AV6 voltage-amplifier stage and a 6EH5 power-output stage, provides the amplification necessary to overcome the attenuation of voice levels by system cabling. A 6X4 half-wave rectifier circuit converts the 117-volt ac input power to the dc power required for operation of the amplifier stages. A 6.3-volt secondary winding on the power transformer ( $T_3$ ) in the rectifier circuit provides heater power for the amplifier and rectifier tubes.

The speaker at each intercom station is used for both talk and listen functions. The talk-listen switch  $S_1$  at the master location establishes the talk or listen mode for all stations. The voice communications are initiated from the master unit. Switch  $S_1$  is depressed to the TALK position, and the initiator talks into the master-unit speaker. The audio (voice-signal) voltage that is then developed across the speaker voice coil is coupled by input transformer  $T_1$  to the control grid of the 6AV6 audio amplifier. Selector switch  $S_2$  connects

the desired remote unit into the intercom system. With  $S_1$  depressed to the TALK position, the remote unit speaker is automatically connected to the audio amplifier output for listen-mode operation. When  $S_1$  is in the LISTEN position, the master-unit speaker is connected in the listen mode, and the remote-unit speaker is connected to the amplifier input. A reply from the remote unit is then coupled from the remote speaker by transformer  $T_1$  to the control grid of the 6AV6 audio amplifier.

Transformer  $T_1$  matches the voice-coil impedance of the 4-ohm permanent-magnet speaker (of either master or remote unit) to the 25000-ohm input impedance of the 6AV6 amplifier stage. This stage and the 6EH5 audio output stage amplify the audio (voice) signals received from one location (the master unit or one of the remote units) to develop the audio power required to produce an audible output from the speaker at another location. Output transformer  $T_2$  matches the 3000-ohm plate-circuit impedance of the output stage to the 4-ohm voice-coil impedance of the speaker (master-unit or remote-unit) to which the communication is directed, as determined by the settings of switches  $S_1$  and  $S_2$ . The VOL. CONT. potentiometer  $R_1$  in the input circuit of the 6AV6 audio amplifier stage provides the volume-control adjustment for the system.

## 29-9

### HIGH-FIDELITY AUDIO AMPLIFIER

Class AB<sub>1</sub>; Power Output, 15 Watts


#### Circuit Description

This high-fidelity audio power amplifier can deliver 15 watts of rms output power with less than 0.4 per cent total harmonic distortion and less than 1.5 per cent intermodulation distortion. The frequency response of the amplifier is flat within  $\pm 0.5$  dB from 20 Hz to 60 kHz, and the sensi-

tivity is such that the rated output of 15 watts is obtained for an input of 1.2 volts rms. The total hum and noise, with the input shorted, is 84 dB below 15 watts. The circuit operates from a 117-volt ac power line. The transformer-coupled ac input power is converted to dc operating

## 29-9

## HIGH-FIDELITY AUDIO AMPLIFIER (Cont'd)

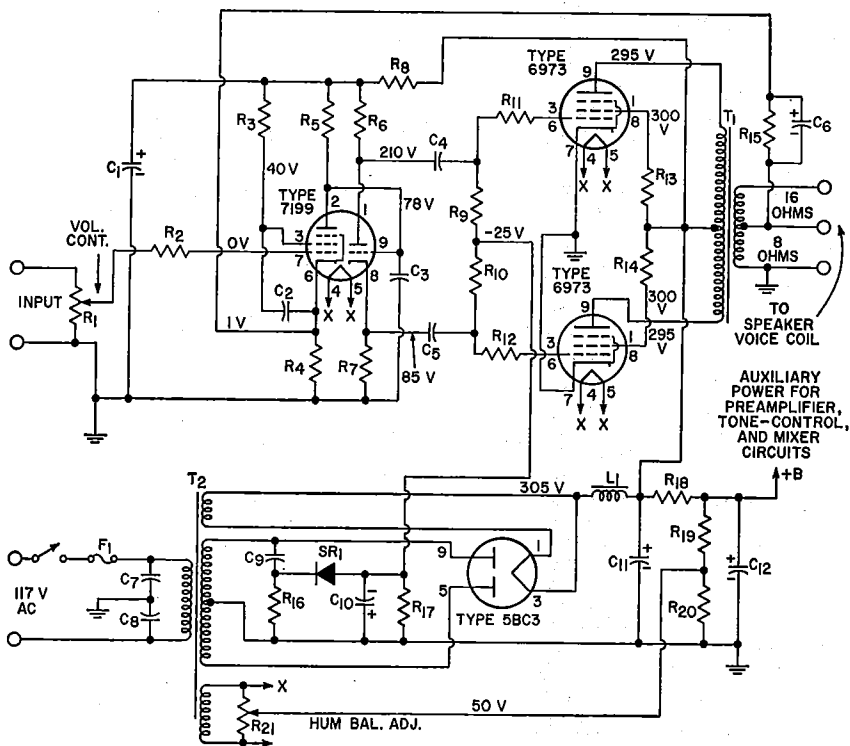

## Parts List

$C_1=40 \mu\text{F}$ , electrolytic, 450 V.  
 $C_2, C_4, C_6=0.25 \mu\text{F}$ , paper, 400 V.  
 $C_3=3.3 \text{ pF}$ , ceramic or mica, 600 V.  
 $C_5=150 \text{ pF}$ , ceramic or mica, 400 V.  
 $C_7, C_8=0.05 \mu\text{F}$ , paper, 400 V.  
 $C_9=0.02 \mu\text{F}$ , paper 600 V.  
 $C_{10}=100 \mu\text{F}$ , electrolytic, 50 V.  
 $C_{11}=80 \mu\text{F}$ , electrolytic, 450 V.  
 $C_{12}=40 \mu\text{F}$ , electrolytic, 450 V.  
 $F_1$ =Fuse, 3 amperes  
 $L_1$ =Choke, 3 H, 160 mA, dc resistance 75 ohms or less, Triad C-13X or equiv.

$R_1$ =Volume control, potentiometer, 1 megohm  
 $R_2=10000$  ohms, 0.5 watt  
 $R_3=0.82$  megohm, 0.5 watt  
 $R_4=820$  ohms, 0.5 watt  
 $R_5=0.22$  megohm, 0.5 watt  
 $R_6, R_7=15000$  ohm  $\pm 5$  per cent, 2 watts  
 $R_8=3900$  ohms, 2 watts  
 $R_9, R_{10}=0.1$  megohm, 0.5 watt  
 $R_{11}, R_{12}=1000$  ohms, 0.5 watt  
 $R_{13}, R_{14}=100$  ohms, 0.5 watt  
 $R_{15}=8200$  ohms, 0.5 watt  
 $R_{16}=15000$  ohms, 1 watt  
 $R_{17}=68000$  ohms, 0.5 watt  
 $R_{18}=4700$  ohms, 2 watts  
 $R_{19}=0.27$  megohm, 1 watt  
 $R_{20}=47000$  ohms, 0.5 watt

$R_{21}$ =Hum balance adjustment, potentiometer, 100 ohms, 0.5 watt  
 $SR_1$ =Selenium rectifier, 20 mA, 135 volts rms  
 $T_1$ =Output transformer, (having 8-ohm tap for feedback connection) for matching impedance of voice coil to 6600-ohm plate-to-plate tube load; 50 watts; frequency response, 10 to 50000 Hz; Stancor A-8056 or equiv.  
 $T_2$ =Power transformer, 360-0-360 volts rms, 120 mA; 6.3 V., 3.5 A; 5 V., 3 A; Stancor 8410 or equiv. (see Note 1)

- Notes: 1. For stereo operation from a single power supply, the power transformer  $T_2$  must be replaced by one that has a higher current rating. A Stancor Type 6315 or equivalent (370-0-370 volt rms, 275 mA) is recommended.  
 2. If the amplifier oscillates or "motorboats," reverse ground and feedback connections in secondary of output transformer  $T_1$ .

## 29-9 HIGH-FIDELITY AUDIO AMPLIFIER (Cont'd)

### Circuit Description (Cont'd)

power for the amplifier stages by the 5BC3 full-wave rectifier. Heater power for the amplifier tubes and the rectifier are obtained from the 6.3-volt and 5-volt secondary windings, respectively, on the rectifier power transformer ( $T_2$ ).

A high-gain pentode voltage amplifier is used as the input stage for the audio power amplifier. The output of this stage is direct-coupled to the control grid of a triode split-load type of phase inverter. The use of direct coupling between these stages minimizes phase shift and, consequently, increases the amount of inverse feedback that may be used without danger of low-frequency instability. A low-noise 7199 tube, which contains a high-gain pentode section and a medium- $\mu$  triode section in one envelope, fulfills the active-component requirement for both the pentode input stage and the triode phase inverter. Potentiometer  $R_1$  in the input circuit of the 7199 pentode section is the volume control for the amplifier.

The plate and cathode outputs of the phase inverter, which are equal in amplitude and opposite in phase, are used to drive a pair of pentode-connected 6973 beam-power tubes used in a class  $AB_1$  push-pull output stage. The 6973 output tubes are biased for class  $AB_1$  operation by the fixed negative voltage applied to the control-grid circuit from the rectifier circuit. Fixed bias is used because a class AB amplifier provides highest efficiency

and least distortion for this bias method.

Transformer  $T_1$  couples the audio-amplifier output to the speaker. The taps on the secondary of this transformer match the plate-to-plate impedance of the output stage to the voice-coil impedance of an 8- or 16-ohm speaker. Negative feedback of 19.5 dB is coupled from the secondary of the output transformer (speaker voice coil) to the cathode of the input stage to reduce distortion and to improve circuit stability.

Fixed-bias operation of the output stage requires that the power supply provide very good voltage regulation because the plate current of the 6973 tubes varies considerably with the signal level. The conventional choke-input type of power supply used provides the required regulation. The fixed bias for the output stage is obtained from one-half the high-voltage secondary winding of power transformer  $T_2$  through a capacitance-resistance voltage divider and the 20-milliampere, 135-volt selenium rectifier. Potentiometer  $R_{e1}$  connected across the 6.3-volt secondary winding of transformer  $T_2$  provides a hum balance adjustment for the audio power amplifier. The wiper arm of this potentiometer is connected to the junction of a resistive voltage divider across the output of the power supply. The resulting positive bias voltage applied to the tube heaters minimizes heater-to-cathode leakage and substantially reduces hum.

## 29-10 HIGH-FIDELITY AUDIO AMPLIFIER

Class  $AB_1$ ; Power Output, 30 Watts

### Circuit Description

This audio power amplifier can deliver 30 watts of rms output power with less than 0.7 per cent total harmonic distortion and less than 1.5 per cent intermodulation distortion. The frequency response of the amplifier is flat within  $\pm 0.5$  dB from 15


Hz to 40 kHz. The total hum and noise, with the input shorted, is 85 dB below 30 watts. The rated output of 30 watts is obtained for an input of 1 volt rms.

The 30-watt amplifier is essentially identical to the 15-watt ampli-



## 29-10

## HIGH-FIDELITY AUDIO AMPLIFIER (Cont'd)

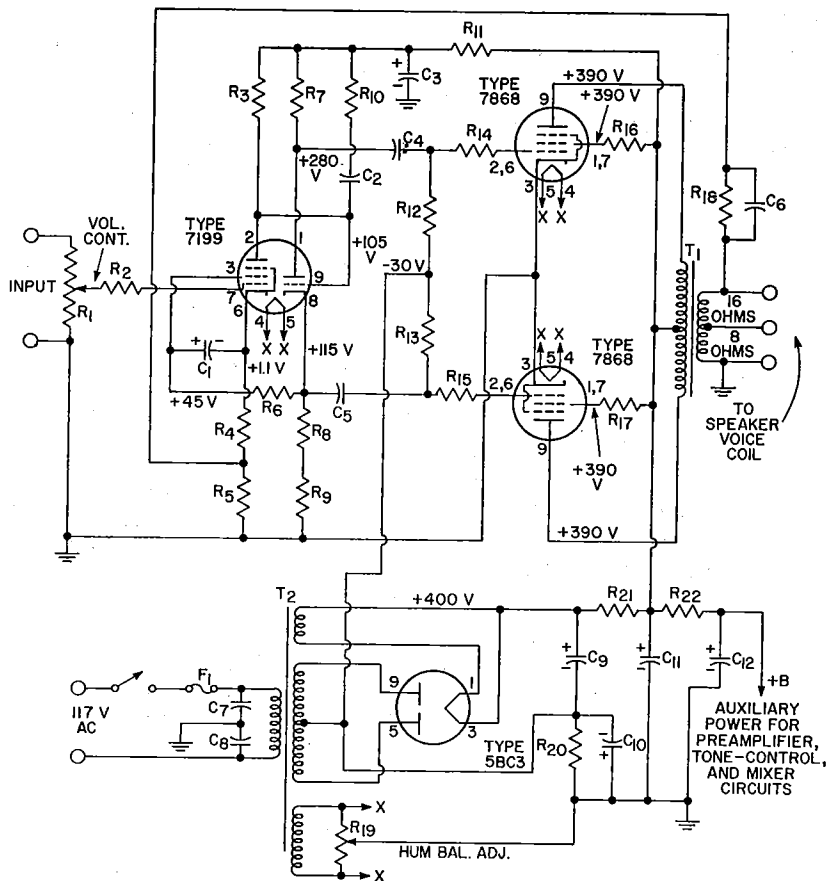

## Parts List

$C_1=25 \mu\text{F}$ , electrolytic, 50 V  
 $C_2=22 \text{ pF}$ , ceramic or mica, 600 V  
 $C_3=80 \mu\text{F}$ , electrolytic, 450 V  
 $C_4, C_5=0.25 \mu\text{F}$ , paper, 600 V  
 $C_6=0.01 \mu\text{F}$ , paper, 600 V  
 $C_7, C_8=0.05 \mu\text{F}$ , paper, 600 V  
 $C_9, C_{11}=40 \mu\text{F}$ , electrolytic, 500 V  
 $C_{10}=100 \mu\text{F}$ , electrolytic, 50 V  
 $C_{12}=20 \mu\text{F}$ , electrolytic, 450 V  
 $F_1$ =Fuse, 3 amperes, 160 V  
 $R_1$ =Volume control, potentiometer, 1 megohm  
 $R_2=10000 \text{ ohms}$ , 0.5 watt  
 $R_3=0.22 \text{ megohm}$ , 0.5 watt

$R_4=820 \text{ ohms}$ , 0.5 watt  
 $R_5=10 \text{ ohms}$ , 0.5 watt  
 $R_6=0.18 \text{ megohm}$ , 0.5 watt  
 $R_7, R_8=15000 \text{ ohms} \pm 5 \text{ per cent}$ , 2 watts  
 $R_9=1000 \text{ ohms}$ , 0.5 watt  
 $R_{10}=22000 \text{ ohms}$ , 0.5 watt  
 $R_{11}=2000 \text{ ohms}$ , 2 watts  
 $R_{12}, R_{13}=0.1 \text{ megohm}$ , 0.5 watt  
 $R_{14}, R_{15}=1000 \text{ ohms}$ , 0.5 watt  
 $R_{16}, R_{17}=56 \text{ ohms}$ , 0.5 watt  
 $R_{18}=270 \text{ ohms}$ , 0.5 watt  
 $R_{19}$ =Hum balance adjustment, potentiometer, 100 ohms, 0.5 watt  
 $R_{20}=220 \text{ ohms}$ , 10 watts

$R_{21}=50 \text{ ohms}$ , 10 watts  
 $R_{22}=10000 \text{ ohms}$ , 2 watts  
 $T_1$ =Output transformer (having 16-ohm tap for feedback connection) for matching impedance of voice coil to 6600-ohm plate-to-plate tube load; 50 watts; frequency response, 10 to 50000 Hz; Stancor A-8056 or equiv.  
 $T_2$ =Power transformer, 375-0-375 volts rms, 160 mA; 6.3 V., 5 A; 5 V., 3 A; Thordarson type T22R33 or equivalent (see Note 1).

- Notes: 1. For stereo operation from a single power supply, the power transformer  $T_2$  must be replaced by one that has a higher current rating. A Stancor Type 6315 or equivalent (370-0-370 volts rms, 275 mA) is recommended.
2. If amplifier oscillates or "motorboats," reverse ground and feedback connections in secondary of output transformer  $T_1$ .

## 29-10 HIGH-FIDELITY AUDIO AMPLIFIER (Cont'd)


## Circuit Description (Cont'd)

fier (circuit 29-9) except that it uses 7868 beam power tubes in the output stage to develop the higher audio power output and uses a resistive network in the negative leg of the power supply, rather than a separate

rectifier, to supply the fixed-bias voltage for the output stage. A potentiometer ( $R_{10}$ ) connected across the 6.3-volt heater winding also provides the hum balance adjustment for the 30-watt amplifier.

## 29-11

## HIGH-FIDELITY AUDIO AMPLIFIER

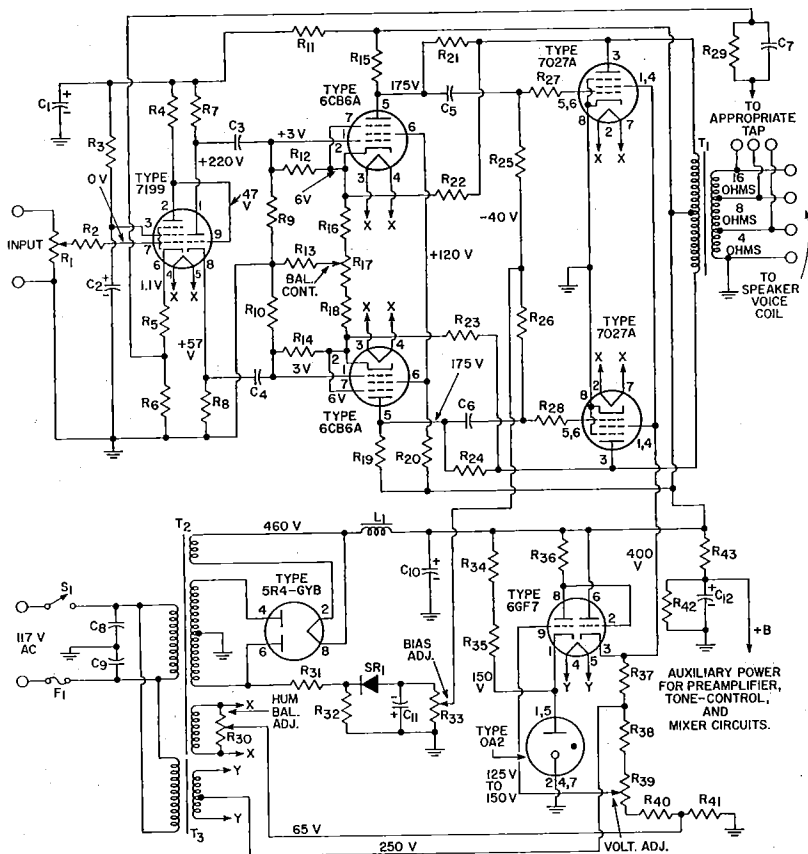Class AB<sub>1</sub>; Power Output, 50 Watts

## Preliminary Adjustments

The following adjustments should be made before operation:

- (1) With rectifier out of socket, adjust Bias Adj.  $R_{33}$  for -40 volts between the wiper arm and ground bus.
- (2) With speaker connected, adjust Screen-Grid Voltage Adj.  $R_{30}$  for 400 volts between pin 3 of 66F7 and ground bus.
- (3) With input shorted, adjust Hum Bal. Adj.  $R_{30}$  for minimum hum from speaker.
- (4) With input open and Vol. Cont. set for maximum volume, adjust Bal. Cont.  $R_{17}$  for minimum hum from speaker.

## 29-11 HIGH-FIDELITY AUDIO AMPLIFIER (Cont'd)

## Parts List

|  |  |   |
|--|--|---|
| C <sub>1</sub> , C <sub>2</sub> =40 $\mu$ F, electrolytic, 450 V   | R <sub>12</sub> , R <sub>14</sub> =1.3 megohms, 0.5 watt   | R <sub>30</sub> =0.27 megohm, 0.5 watt  |
| C <sub>3</sub> , C <sub>4</sub> =0.02 $\mu$ F, paper, 400 V  | R <sub>13</sub> =47 ohms, 0.5 watt   | R <sub>31</sub> =10000 ohms, 1 watt   |
| C <sub>5</sub> , C <sub>6</sub> =1 $\mu$ F, paper, 400 V   | R <sub>15</sub> , R <sub>16</sub> =0.15 megohm, 0.5 watt   | R <sub>32</sub> =Screen-grid voltage adjustment, potentiometer, 25000 ohms, 2 watts   |
| C <sub>7</sub> =0.002 $\mu$ F to 4-ohm tap; 0.0015 $\mu$ F to 8-ohm tap; or, 0.001 $\mu$ F to 16-ohm tap; paper, 400 V | R <sub>17</sub> , R <sub>18</sub> =390 ohms, 0.5 watt  | R <sub>33</sub> =15000 ohms, 2 watts  |
| C <sub>8</sub> , C <sub>9</sub> =0.05 $\mu$ F, paper, 600 V  | R <sub>17</sub> =AC balance control, potentiometer, 500 ohms   | R <sub>34</sub> =0.22 megohm, 2 watts   |
| C <sub>10</sub> =20 $\mu$ F, electrolytic, 450 V   | R <sub>20</sub> =0.15 megohm, 1 watt   | R <sub>35</sub> =22000 ohms, 2 watts  |
| C <sub>11</sub> =100 $\mu$ F, electrolytic, 150 V  | R <sub>21</sub> , R <sub>24</sub> =0.33 megohm, 1 watt   | SR <sub>1</sub> =Selenium rectifier, 20 mA, 135 volts rms   |
| C <sub>12</sub> =40 $\mu$ F, electrolytic, 450 V   | R <sub>22</sub> , R <sub>23</sub> =0.12 megohm, 2 watts  | T <sub>1</sub> =Output transformer for matching impedance of voice coil to 5000-ohm plate-to-plate tube load; 50 watts; frequency response, 10 to 50000 Hz; United Transformer Corp. LS6L4 or equiv. (see Note 1) |
| F <sub>1</sub> =Fuse, 5 amperes  | R <sub>25</sub> , R <sub>26</sub> =0.1 megohm, 0.5 watt  | T <sub>2</sub> =Power transformer, 600-0-600 volts rms, 200 mA, 6.3 V., 5 A.; 5 V., 3 A.; Thordarson 22R36 or equiv. (see Note 2)   |
| L <sub>1</sub> =Choke, 8 H, 250 mA, dc resistance 60 ohms, or less   | R <sub>27</sub> , R <sub>28</sub> =47000 ohms, 0.5 watt  | T <sub>3</sub> =Filament transformer, 6.3 volts, center tapped, 1 ampere; Thordarson 21F08 or equiv.  |
| R <sub>1</sub> =Volume control, potentiometer, 0.5 megohm  | R <sub>29</sub> =600 ohms to 4-ohm tap; 320 ohms to 8-ohm tap; or, 1200 ohms to 16-ohm tap; 0.5 watt |   |
| R <sub>2</sub> =4700 ohms, 0.5 watt  | R <sub>30</sub> =Hum balance adjustment, potentiometer, 100 ohms                                     |   |
| R <sub>3</sub> =0.82 megohm, 0.5 watt  | R <sub>31</sub> =0.12 megohm, 5 watts  |   |
| R <sub>4</sub> =0.22 megohm, 0.5 watt  | R <sub>32</sub> , R <sub>34</sub> , R <sub>35</sub> , R <sub>37</sub> =33000 ohms, 2 watts           |   |
| R <sub>5</sub> =820 ohms, 0.5 watt   | R <sub>33</sub> =Bias adjustment, potentiometer 50000 ohms,  |   |
| R <sub>6</sub> =10 ohms, 0.5 watt  |  |   |
| R <sub>7</sub> R <sub>8</sub> = 15000 ohms, 2 watts  |  |   |
| R <sub>9</sub> , R <sub>10</sub> =1.5 megohms, 0.5 watt  |  |   |
| R <sub>11</sub> =33000 ohms, 2 watts   |  |   |

- Notes: 1. In many applications, less expensive transformers, such as Stancor Type A8053 or United Transformer Corporation Type S-17, which have a narrower frequency response, may be used for T<sub>1</sub> with satisfactory results.
2. For stereo operation from a single power supply, the following changes are required: (a) The power transformer T<sub>2</sub> must be replaced by one that has a higher current rating; a Freed Transformer Corporation Type DC6A or equivalent (600-0-600 volts rms, 300 mA) is recommended. (b) The 50000-ohm Bias Adj. potentiometer R<sub>33</sub> should be replaced by two 100000-ohm potentiometers (one for each channel) connected in parallel. (c) A second 5R4-GYB rectifier tube should be connected in parallel with the one used for monaural operation. (Connect the 5R4-GYB tubes so that the two sections of each tube are in parallel with the corresponding sections of the other tube; do not use separate tubes for each section of the rectifier circuit.)
3. If the amplifier oscillates or "motorboats," reverse ground and feedback connections in secondary of output transformer T<sub>1</sub>.

## Circuit Description

This four-stage audio power amplifier can deliver 50 watts of rms power output with less than 0.1 per cent total harmonic distortion and less than 1 per cent intermodulation distortion. The frequency response of the amplifier is flat within  $\pm 0.5$  dB from 10 Hz to 50 kHz. Sensitivity is 0.4 volt rms input for 50 watts output. The total hum and noise is 70 dB below 50 watts.


The 50-watt amplifier, like the 15-watt and 30-watt high-fidelity amplifiers (circuits 29-9 and 29-10), uses a 7199 low-noise triode-pentode as an input amplifier and phase-splitter, but has a push-pull driver stage, which uses 6CB6 sharp-cutoff pentodes. The superior performance of this amplifier can also be attributed, in part, to the use of a 450-volt plate supply and a 400-volt electronically regulated grid-No. 2 supply

for the 7027A beam power tubes in the output stage and to the use of inverse-feedback loops from the plates to the grids of the output tubes, from the plates of the output tubes to the cathodes of the driver tubes, and from the voice-coil winding of the output transformer to the cathode of the input amplifier. Additional features are the operation of all heaters at a positive voltage with respect to ground and use of a balancing adjustment (R<sub>30</sub>) in the heater-supply circuit to minimize hum, a grid-No. 2 voltage adjustment (R<sub>37</sub>), a grid-No. 1 bias adjustment (R<sub>33</sub>) for the 7027A output tubes, and an ac-balance adjustment (R<sub>15</sub>) which may be used to balance the outputs of the push-pull stages. Operation of the 50-watt amplifier is essentially the same as that of the 15- and 30-watt amplifiers.

29-12

## TWO-CHANNEL STEREOPHONIC AMPLIFIER

Power Output, 1 Watt Each Channel

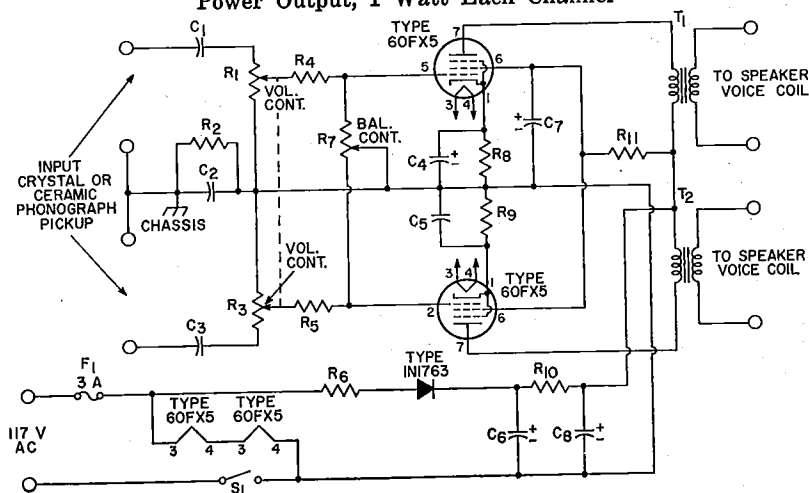

## Parts List

$C_1, C_3 = 0.22 \mu\text{F}$ , paper, 400 V

$C_2 = 0.1 \mu\text{F}$ , paper, 400 V

$C_4, C_8 = 50 \mu\text{F}$ , electrolytic, 25 V

$C_5 = 50 \mu\text{F}$ , electrolytic, 150 V

$C_7, C_6 = 50 \mu\text{F}$ , electrolytic, 150 V

$F_1 = \text{Fuse}$ , 3 amperes

$R_1, R_3 = \text{Volume control potentiometer}$ , 1.5 megohms, ganged, audio taper

$R_2 = 0.22 \text{ megohm}$ , 0.5 watt

$R_4, R_5 = 47000 \text{ ohms}$ , 0.5 watt

$R_6 = 12 \text{ ohms}$ , 1 watt

$R_7 = \text{Balance control}$ , potentiometer, 2 megohms, audio taper

$R_8, R_9 = 60 \text{ ohms}$ , 1 watt

$R_{10} = 280 \text{ ohms}$ , 2 watts

$R_{11} = 220 \text{ ohms}$ , 2 watts

$S_1 = \text{ON-OFF switch}$ , single-pole, single-throw

$T_1, T_2 = \text{Output transformer}$  for matching impedance of voice coil to 3000-ohm tube load; Triad S-16X or equiv.

## Circuit Description

This ac/dc two-channel (stereo) amplifier operates from either an ac power line or dc supply of 117 volts. AC power inputs are converted to dc power by the 1N1763 silicon-diode half-wave rectifier circuit. The heaters of the 60FX5 power pentodes (one for each channel) used in the amplifier are connected in series directly across the input power line.

In stereo units that use high-output ceramic stereo cartridges, the high power sensitivity of the 60FX5 tubes at low supply voltage eliminates the need for preamplifier stages. The 60FX5 provides a power output of 1.3 watts to a 3000-ohm transformer primary with only 3 volts peak drive on grid No. 1. With a transformer having a good impedance match and 85-per-cent efficiency, each channel of the stereo amplifier supplies 1.1 watts of useful power output at the speaker.


No special mounting or layout

precautions are necessary for this amplifier other than the value and placement of the isolating capacitor  $C_2$  between B- and the chassis. This capacitor should be connected to the same point on the chassis at which the common cartridge lead is tied. A value of 0.1 microfarad for the isolating capacitor is suggested so that full output is obtained from the pickup.

As with all single-ended amplifier circuits, especially ac/dc units, adequate screen-grid bypassing is necessary to minimize hum. Screen-grid filtering is obtained through use of a 220-ohm dropping resistor  $R_6$  and a 50-microfarad electrolytic capacitor  $C_5$ . Although, in the circuit shown, separate cathode-bias resistors are used for better dynamic balance, a single 30-ohm common cathode-bias resistor bypassed with a 50-microfarad electrolytic capacitor may also be used.

## 29-13 MICROPHONE AND PHONOGRAPH AMPLIFIER

Power Output, 8 Watts

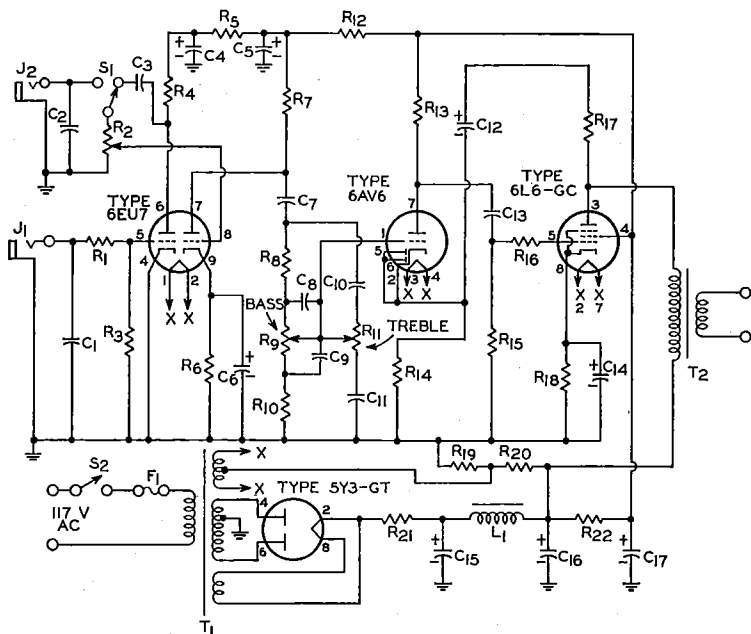

### Parts List

$C_1, C_2=100$  pF, disc-ceramic, 300 V  
 $C_3=0.05$   $\mu$ F, paper, 200 V  
 $C_4=8$   $\mu$ F, electrolytic, 450 V  
 $C_5=16$   $\mu$ F, electrolytic, 450 V  
 $C_6=25$   $\mu$ F, electrolytic, 450 V  
 $C_7=0.1$   $\mu$ F, paper, 200 V  
 $C_8=0.001$   $\mu$ F, disc-ceramic, 300 V  
 $C_9=0.01$   $\mu$ F, disc-ceramic, 300 V  
 $C_{10}=470$  pF, disc-ceramic, 300 V  
 $C_{11}=4700$  pF, disc-ceramic, 300 V  
 $C_{12}=4$   $\mu$ F, electrolytic, 450 V  
 $C_{13}=0.05$   $\mu$ F, paper, 600 V  
 $C_{14}=25$   $\mu$ F, electrolytic, 25 V  
 $C_{15}, C_{16}, C_{17}=20$   $\mu$ F, electrolytic, 450 V  
 $F_1=$ Fuse, 1 ampere  
 $J_1=$ Jack for high-impedance

crystal microphone input; max. input: 2 millivolts peak  
 $J_2=$ Jack for crystal phonograph pickup input  
 $L_1=$ Filter choke, 5 H, 200 mA, United Transformer Corp. R20 or equiv.  
 $R_1, R_{10}=10000$  ohms, 0.5 watt  
 $R_2=$ Volume Control, potentiometer, 1 megohm  
 $R_3=2.2$  megohms, 0.5 watt  
 $R_4, R_8, R_{20}=0.22$  megohm, 0.5 watt  
 $R_5=27000$  ohms, 0.5 watt  
 $R_6=12000$  ohms, 0.5 watt  
 $R_7, R_{13}=0.1$  megohm, 0.5 watt  
 $R_9, R_{11}=$ Tone control, potentiometer, 0.5 megohm  
 $R_{10}=22000$  ohms, 0.5 watt  
 $R_{12}=12000$  ohms, 0.5 watt

$R_{14}=1800$  ohms, 0.5 watt  
 $R_{15}=0.47$  megohm, 0.5 watt  
 $R_{17}=0.15$  megohm, 0.5 watt  
 $R_{18}=180$  ohms, 2 watts  
 $R_{19}=47000$  ohms, 1 watt  
 $R_{21}=50$  ohms, 10 watts  
 $R_{22}=8200$  ohms, 2 watts  
 $S_1=$ Microphone-phonograph selector; wafer switch; single-pole, double-throw  
 $S_2=$ ON-OFF switch, single-pole, single-throw  
 $T_1=$ Power transformer, 300-0-300 V., 90 mA.; 6.3 V., 3.5 A., center tapped; 5 V., 2 A, Thordarson 22R04 or equiv.  
 $T_2=$ Output transformer for matching impedance of voice coil to 4000-ohm tube load; 10 watts; United Transformer Corp. S14 or equiv.

### Circuit Description

This microphone and phonograph amplifier can deliver up to 8 watts of audio output power for an input of 200 millivolts rms at  $J_2$  (phonograph input) or an input of 6.8 millivolts rms at  $J_1$  (microphone input). The amplifier uses a 6EU7 twin-triode input amplifier, a 6AV6 driver stage,

and a 6L6GC single-ended output stage to increase the signal power from a high-impedance crystal microphone or crystal phonograph pickup to the desired level. The transformer-coupled ac input power is converted to dc operating power for these stages by a 5Y3GT full-wave recti-

## 29-13

## MICROPHONE AND PHONOGRAPH AMPLIFIER (Cont'd)

### Circuit Description (Cont'd)

fier circuit. A 5-volt winding on power transformer  $T_1$  provides the heater power for the rectifier tube, and a 6.3-volt winding provides heater power for the other tubes in the amplifier. The center tap on the 6.3-volt winding is connected to the junction of a resistive voltage divider ( $R_{10}$  and  $R_{20}$ ) across the output of the power supply. The resulting positive bias applied to the tube heaters substantially reduces heater-to-cathode leakage and, consequently, minimizes hum.

The signals from a crystal microphone are usually much smaller than those from a crystal phonograph pickup. Microphone signals, therefore, are amplified by both sections of the 6EU7 twin-triode amplifier. The signals are coupled from  $J_1$  to the pin 5 control grid of the 6EU7. The plate output from this triode section is then coupled through switch  $S_1$  (microphone position) and volume-control potentiometer  $R_2$  to


the pin 8 control grid of the 6EU7. With selector switch  $S_1$  in the phonograph position, phonograph inputs are coupled directly from  $J_2$  across volume-control potentiometer  $R_2$  to the pin 8 control grid, and the first section of the 6EU7 is bypassed.

The outputs from the pin 7 plate of the 6EU7 are coupled across the frequency-sensitive tone-control network to the control grid of the 6AV6 driver stage. The bass and treble controls  $R_9$  and  $R_{11}$  are adjusted to assure optimum low- and high-frequency response characteristics for the amplifier. The two diode plate sections of the 6AV6 are shorted to the tube cathode and thereby are made inoperative. The output of the driver stage is applied to the 6L6GC output stage which develops the audio power required to drive a speaker. Transformer  $T_2$  matches the 4000-ohm plate impedance of the output stage to the speaker voice-coil impedance.

## 29-14

## TWO-CHANNEL AUDIO MIXER

Voltage Gain from Each Grid of 6EU7 to Output is Approximately 20

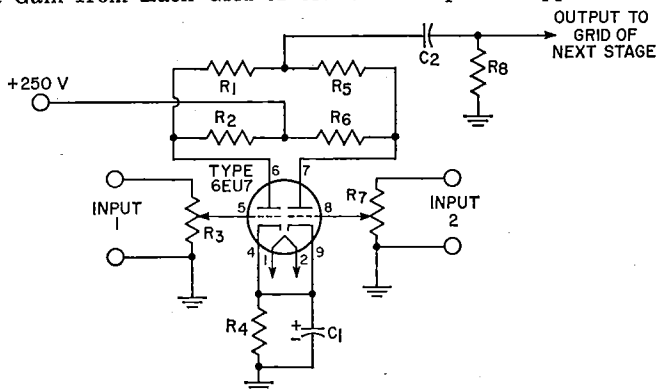

### Parts List

$C_1=10 \mu\text{F}$ , electrolytic, 25 V  
 $C_2=0.05 \mu\text{F}$ , paper, 400 V  
 $R_1, R_5, R_6=1$  megohm,

0.5 watt  
 $R_2, R_3=0.1$  megohm,  
 0.5 watt

$R_4, R_7$ =Potentiometers, 0.1 megohm, audio taper  
 $R_{11}=1200$  ohms, 0.5 watt

## 29-14 TWO-CHANNEL AUDIO MIXER (Cont'd)

## Circuit Description


This high-fidelity mixer circuit can be used to combine audio-frequency program material from two sources. Each signal channel consists of a one-stage voltage amplifier using one section of a 6EU7 low-noise twin-triode. Each section of the mixer can provide a voltage gain

of about 20, and can handle an input signal of about 0.2 volt rms without overloading. The dc plate supply of +250 volts (nominal value) for the mixer stages can usually be obtained from an auxiliary tap on the power supply for the audio power amplifiers.

## 29-15

## PHONOGRAPH AMPLIFIER

Power Output, 1 Watt

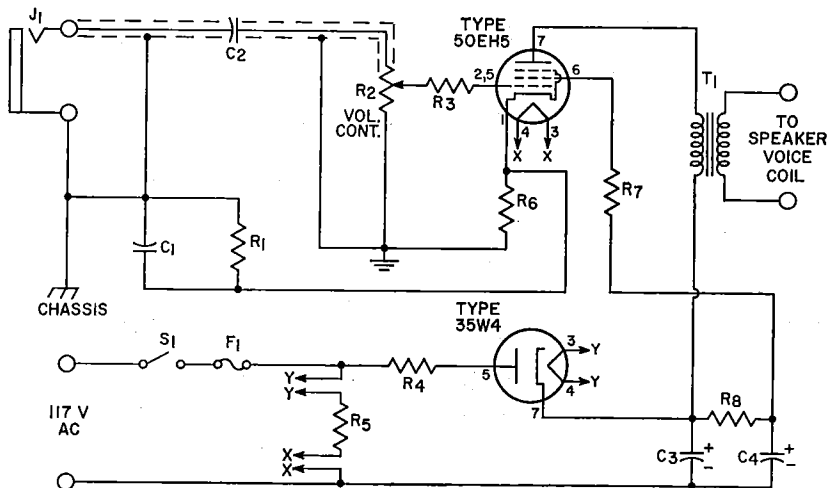

## Parts List

$C_1=0.082 \mu\text{F}$ , paper, 400 V  
 $C_2=0.02 \mu\text{F}$ , paper, 400 V  
 $C_3, C_4=40 \mu\text{F}$ , electrolytic, 160 V  
 $F_1$ =Fuse, 1 ampere  
 $J_1$ =Input connector, shielded, for crystal phono-graph

pickup  
 $R_1=0.22$  megohm, 0.5 watt  
 $R_2$ =Volume control, potentiometer, 0.5 megohm, audio taper  
 $R_3=10000$  ohms, 0.5 watt  
 $R_4=22$  ohms, 0.5 watt

$R_5=210$  ohms, 10 watts  
 $R_6, R_7=56$  ohms, 0.5 watt  
 $R_8=3300$  ohms, 1 watt  
 $T_1$ =Output transformer for matching impedance of voice coil to 3000-ohm tube load

## Circuit Description


This single-stage phono-graph amplifier operates directly from either an ac power line or a dc supply of 117 volts. AC power inputs are converted to dc power by the 35W4 half-wave rectifier circuit. The heaters of the amplifier and rectifier tube are connected in series, together with a 210-ohm voltage-dropping resistor,  $R_5$ , directly across the input power line.

The amplifier uses a 50EH5

power pentode to develop up to 1 watt of audio output power from the input supplied from a crystal phono-graph pickup. The input is applied at  $J_1$  and coupled through a length of shielded cable to the input circuit of the pentode amplifier. Volume-control adjustment for the amplifier is provided by potentiometer  $R_2$ . The output coupling transformer  $T_1$  matches the 3000-ohm plate load impedance of the 50EH5 to the voice-coil impedance of the speaker.

## 29-16 PREAMPLIFIER FOR MAGNETIC PHONOGRAPH PICKUP

With RIAA Equalization

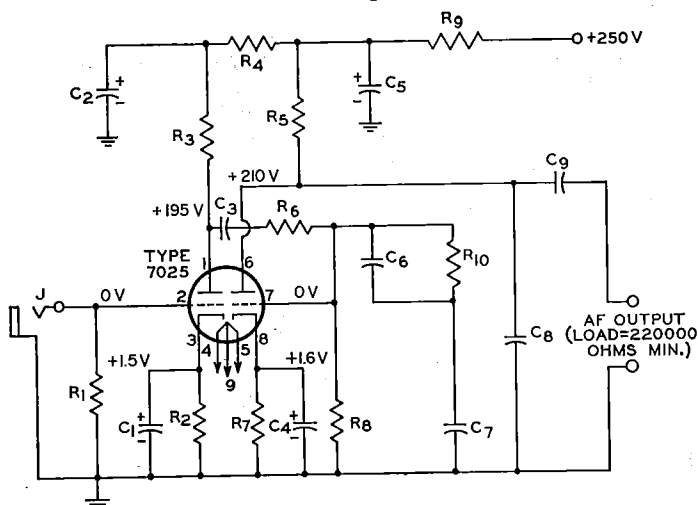

Sensitivity=3 millivolts rms input for output of 0.55 volt at frequency of 1000 Hz.

### Parts List

$C_1, C_4=25 \mu\text{F}$ , electrolytic, 25 V

$C_2, C_5=20 \mu\text{F}$ , electrolytic, 450 V

$C_3=0.1 \mu\text{F}$ , paper, 600 V

$C_6=0.0033 \mu\text{F} \pm 5$  per cent, paper, 600 V

$C_7=0.01 \mu\text{F} \pm 5$  per cent, paper, 600 V

$C_8=180 \text{ pF} \pm 5$  per cent, ceramic or mica, 500 V (includes capacitance of output cable)

$C_9=0.22 \mu\text{F}$ , ceramic, 500 V  
 $J$ =Input connector, shielded, for high-impedance magnetic phono pickup (10 mV output, approx.)  
 $R_1$ =Value depends on type

of magnetic pickup used. Follow pickup manufacturer's recommendations  
 $R_2, R_7=2700$  ohms, 0.5 watt  
 $R_3, R_5=0.1$  megohm, 0.5 watt  
 $R_4=39000$  ohms, 0.5 watt  
 $R_6=0.47$  megohm, 0.5 watt  
 $R_8=0.68$  megohm, 0.5 watt  
 $R_9=15000$  ohms, 1 watt  
 $R_{10}=22000$  ohms, 0.5 watt

### Circuit Description

This two-stage audio preamplifier is intended for use with high-fidelity magnetic phonograph pickups. The two amplifier stages provide an overall circuit gain of approximately 150. The 7025 twin triode used in the circuit features exceptionally low hum and noise and is designed especially for use in high-fidelity circuits that operate at low signal levels. The preamplifier is ideally suited for use as the low-level input stage for audio power amplifiers such as the 50-watt unit, circuit 29-11. For use with audio power amplifiers such as the 15- and 30-watt units, circuits 29-9 and 29-10, which require higher input signals, another low-level amplifier (e.g., the tone-control amplifier, circuit 29-20) must be inserted between the preamplifier and the

power amplifier to obtain the full rated output. The heater and dc operating power required for the preamplifier can usually be obtained from the power-supply circuit for the power amplifier.

The audio signal from the phonograph pickup is applied to J and coupled through a length of shielded cable to the control grid of the input stage of the preamplifier. The interstage coupling between the two amplifier sections of the preamplifier includes an RIAA equalization network ( $R_{10}$  and  $C_6$ ). This network compensates for the Orthophonic recording characteristic\* introduced into a record disc by the manufacturer. The output from the preamplifier is coupled from the plate of the second stage by output coupling capacitor



29-16

## PREAMPLIFIER FOR MAGNETIC PHONOGRAPH PICKUP (Cont'd)


### Circuit Description (Cont'd)

$C_8$  to the input of a tone-control amplifier (if used) or directly to the input of the power amplifier. Because of its relatively high output impedance, the preamplifier is recommended for use in systems in which the preamplifier is mounted on the same chassis as the power amplifier and/or tone-control amplifier. The preamplifier may be used at distances up to 6 feet from the following amplifier provided that the capacitance of capacitor  $C_8$  is reduced approximately 30 picofarads for each foot of shielded cable used for the audio-frequency connection between the preamplifier and the following amplifier.

\* To achieve wide frequency and dynamic ranges, manufacturers of commercial recordings use equipment which introduces a non-uniform relationship between amplitude and frequency. This relationship is known as a "recording characteristic." To assure proper reproduction of a high-fidelity recording, therefore, some part of the reproducing system must have a frequency-response characteristic which is the inverse of the recording characteristic. Most manufacturers of high-fidelity recordings use the RCA "New Orthophonic" (RIIA) characteristic for discs and the NARTB characteristic for magnetic tape.

29-17

## HIGH-FIDELITY PREAMPLIFIER FOR TAPE-HEAD PICKUP With NARTB Equalization

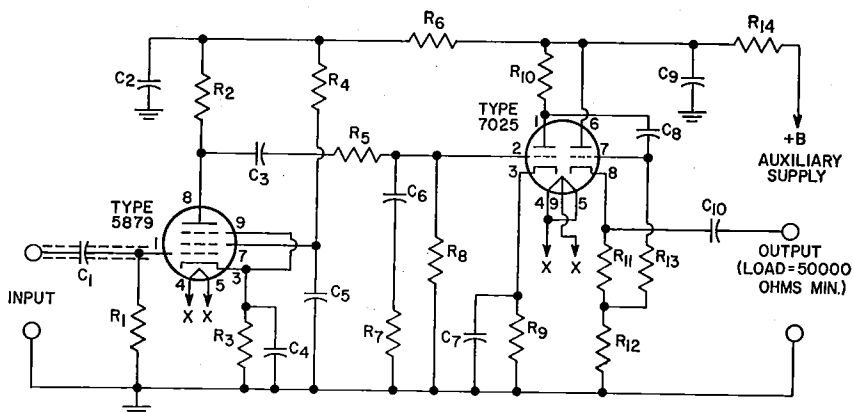

Sensitivity=3 millivolts rms input for output of 0.55 volt at frequency of 1000 Hz.

### Parts List

$C_1=0.047 \mu\text{F}$ , ceramic, 400 V  
 $C_2=40 \mu\text{F}$ , electrolytic, 450 V  
 $C_3=0.1 \mu\text{F}$ , ceramic, 400 V  
 $C_4=25 \mu\text{F}$ , electrolytic, 25 V  
 $C_5=0.22 \mu\text{F}$ , ceramic, 400 V  
 $C_6=0.015 \mu\text{F}$ , ceramic, 400 V  
 $C_7=25 \mu\text{F}$ , electrolytic, 25 V

$C_8=0.22 \mu\text{F}$ , ceramic, 400 V  
 $C_9=40 \mu\text{F}$ , electrolytic, 450 V  
 $C_{10}=0.47 \mu\text{F}$ , ceramic, 400 V  
 $R_1=1 \text{ megohm}$ , 0.5 watt  
 $R_2=0.1 \text{ megohm}$ , 0.5 watt  
 $R_3=1000 \text{ ohms}$ , 0.5 watt  
 $R_4=0.47 \text{ megohm}$ , 0.5 watt  
 $R_5=0.22 \text{ megohm}$ , 0.5 watt  
 $R_6=22000 \text{ ohms}$ , 0.5 watt

$R_7=3300 \text{ ohms}$ , 0.5 watt  
 $R_8=3.3 \text{ megohms}$ , 0.5 watt  
 $R_9=1500 \text{ ohms}$ , 0.5 watt  
 $R_{10}=0.1 \text{ megohm}$ , 0.5 watt  
 $R_{11}=1500 \text{ ohms}$ , 0.5 watt  
 $R_{12}=15000 \text{ ohms}$ , 0.5 watt  
 $R_{13}=0.47 \text{ megohm}$ , 0.5 watt  
 $R_{14}=4700 \text{ ohms}$ , 0.5 watt

## 29-17

## HIGH-FIDELITY PREAMPLIFIER FOR TAPE-HEAD PICKUP (Cont'd)

### Circuit Description


This three-stage preamplifier provides the amplification necessary to increase the output from a tape-head pickup to the level required to drive an audio power amplifier. The circuit uses a 5879 low-noise sharp-cutoff pentode in a high-gain input voltage amplifier, one section of a 7025 twin triode in a second voltage amplifier, and the other section of the 7025 in a cathode-follower output stage. Because of the low-impedance cathode-follower output circuit, the preamplifier may be installed at distances up to 50 feet from the following stage (tone-control or power amplifier) without adverse effect upon its frequency-response characteristics. The preamplifier is intended for use as the low-level input stages for an audio power amplifier, such as the 50-watt unit (circuit 29-11) or, when followed by another low-level amplifier (e.g., the tone-control amplifier, circuit 29-20) the 15- or 30-watt unit (circuit 29-9 or 29-10).

The heater and dc operating power for the preamplifier can usually be obtained from the power supply for the power amplifier.

The preamplifier provides an over-all circuit gain of 180. An input of 3 millivolts rms at the input terminals, is amplified by the pentode and triode voltage amplifiers to develop an output of approximately 0.55 volt rms at the cathode of the cathode-follower output stage. The interstage coupling between the pentode and triode voltage amplifiers equalizes the playback frequency response of the preamplifier to compensate for the NARTB recording characteristic introduced into the magnetic tape by the manufacturer. (See footnote for circuit 29-16.) The output of the preamplifier is coupled by capacitor  $C_{10}$  to the input of the audio power amplifier or to the input of an intermediate tone-control amplifier.

## 29-18 PREAMPLIFIER FOR CERAMIC PHONOGRAPH PICKUP

Cathode Follower (Low-Impedance) Output

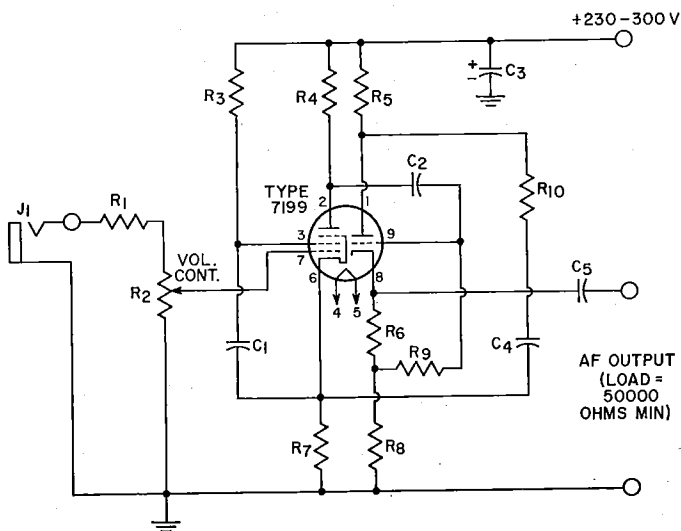

## 29-18

## PREAMPLIFIER FOR CERAMIC PHONOGRAPH PICKUP (Cont'd)

### Parts List

$C_1=0.1 \mu\text{F}$ , paper, 400 V  
 $C_2=0.01 \mu\text{F}$ , paper, 400 V  
 $C_3=20 \mu\text{F}$ , electrolytic, 400 V  
 $C_4=0.25 \mu\text{F}$ , paper, 400 V  
 $C_5=0.22 \mu\text{F}$ , paper, 600 V  
 $J_1$ =Input connector, shielded,

for high-impedance ceramic phono pickup (0.5-volt output)  
 $R_1=1.8$  megohms, 0.5 watt  
 $R_2$ =Volume control, potentiometer, 0.5 megohm, audio taper

$R_3=0.82$  megohm, 0.5 watt  
 $R_4=0.22$  megohm, 0.5 watt  
 $R_5, R_6=47000$  ohms, 0.5 watt  
 $R_7=4700$  ohms, 0.5 watt  
 $R_8=1000$  ohms, 0.5 watt  
 $R_9=1$  megohm, 0.5 watt  
 $R_{10}=1800$  ohms, 0.5 watt

### Circuit Description


This two-stage preamplifier is intended for use with a high-impedance ceramic phonograph pickup. The circuit features a cathode-follower (low-impedance) output which makes it possible to install the preamplifier at distances up to 50 feet from the succeeding stage (tone-control or power amplifier). The preamplifier operates from a dc supply of 230 to 300 volts and a heater supply of 6.3 volts. These voltages can usually be obtained from the power supply for the power amplifier in the audio system.

The preamplifier uses a 7199 triode-pentode in a high-gain pentode input stage and a triode cathode-follower output stage. These stages provide the amplification necessary to increase the output from a crystal phonograph pickup, applied at  $J_1$ , to the level required to drive an audio power amplifier. The output of the preamplifier, coupled from the cathode of the 7199 triode section, may be applied directly to the power amplifier, or to an intermediate tone-control amplifier.

## 29-19

## LOW-DISTORTION PREAMPLIFIER

For Low-Output, High-Impedance Microphones

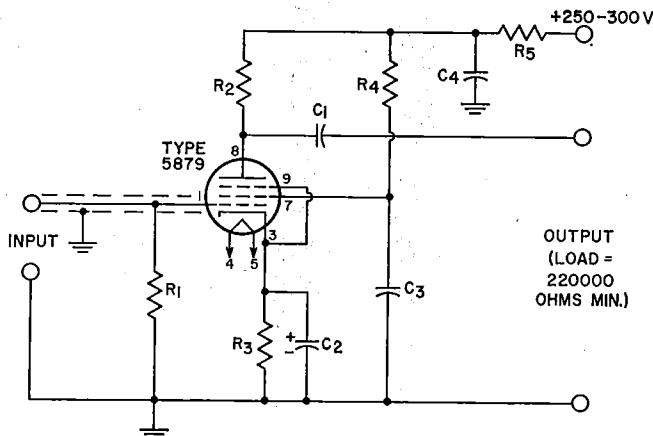

Sensitivity=3 millivolts rms input for output of 220 millivolts.

### Parts List

$C_1=0.047 \mu\text{F}$ , paper, 400 V  
 $C_2=25 \mu\text{F}$ , electrolytic, 25 V  
 $C_3=0.22 \mu\text{F}$ , paper, 400 V  
 $C_4=40 \mu\text{F}$ , electrolytic, 450 V

$R_1=2.2$  megohms, 0.5 watt  
 $R_2=0.1$  megohm, 0.5 watt

$R_3=1000$  ohms, 0.5 watt  
 $R_4=0.47$  megohm, 0.5 watt  
 $R_5=22000$  ohms, 0.5 watt


## 29-19 LOW-DISTORTION PREAMPLIFIER (Cont'd)

## Circuit Description

This single-stage preamplifier is intended for use with a high-fidelity, high-impedance crystal or dynamic microphone. The circuit uses a 5879 low-noise sharp-cutoff pentode in a conventional amplifier circuit that has a high-impedance output, a voltage gain of approximately 70, and a flat frequency response over the

audio range. Because of its high output impedance, the preamplifier should be mounted on the same chassis as the power amplifier and tone-control amplifier (if used). Heater and dc power for the circuit can be obtained from the power supply for the audio power amplifier.

## 29-20 BASS AND TREBLE TONE-CONTROL AMPLIFIER

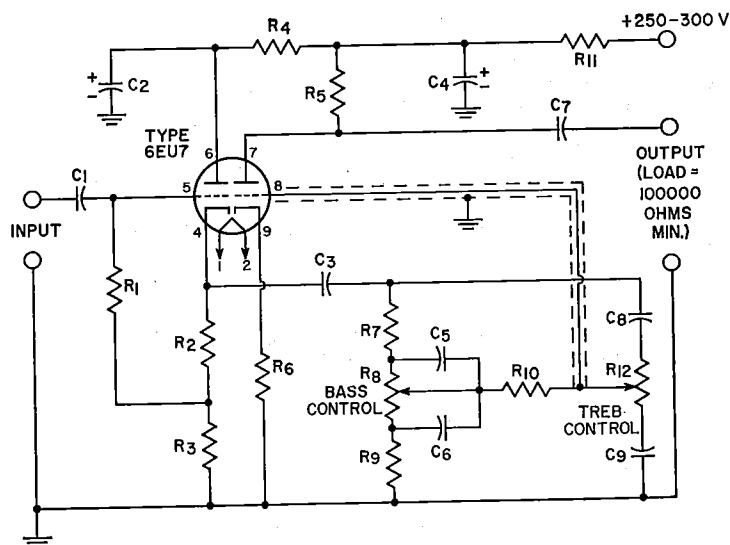

Sensitivity=0.5 volt rms input for output of 1.25 volts with controls set for flat response.

## Parts List

$C_1=0.047 \mu\text{F}$ , paper, 400 V  
 $C_2, C_4=20 \mu\text{F}$ , electrolytic, 450 V  
 $C_3=0.1 \mu\text{F}$ , paper, 400 V  
 $C_5=0.0022 \mu\text{F}$ , paper, 400 V  
 $C_6=0.022 \mu\text{F}$ , paper, 400 V  
 $C_7=0.22 \mu\text{F}$ , paper, 400 V  
 $C_8=220 \text{ pF}$ , ceramic or mica, 500 V

$C_9=0.0022 \mu\text{F}$ , paper, 400 V  
 $R_1=0.47 \text{ megohm}$ , 0.5 watt  
 $R_2=1500 \text{ ohms}$ , 0.5 watt  
 $R_3, R_{11}=15000 \text{ ohms}$ , 0.5 watt  
 $R_4=22000 \text{ ohms}$ , 0.5 watt  
 $R_5, R_7, R_{10}=0.1 \text{ megohm}$ , 0.5 watt

$R_6=1000 \text{ ohms}$ , 0.5 watt  
 $R_8$ =Bass control, potentiometer, 1 megohm, audio taper  
 $R_9=10000 \text{ ohms}$ , 0.5 watt  
 $R_{12}$ =Treble control, potentiometer, 1 megohm, audio taper

## Circuit Description

This high-fidelity tone-control amplifier uses a 6EU7 low-noise twin triode in a two-stage amplifier cascade that consists of an input cathode follower connected to a triode voltage amplifier through a frequency-sensitive (tone-control) interstage cou-

pling network. The bass and treble controls in the coupling network can be adjusted to provide up to 16 dB of boost or attenuation (cut) at 30 Hz and at 15 kHz. With the bass and treble controls set at the mid-range positions, the amplifier provides an

29-20

**BASS AND TREBLE TONE-CONTROL  
AMPLIFIER (Cont'd)****Circuit Description (Cont'd)**

over-all voltage gain of approximately 2.5, and its frequency response is flat within  $\pm 1$ dB from 30 Hz to 15 kHz.

The tone-control amplifier is designed for use immediately ahead of an audio power amplifier, such as the 15-, 30-, or 50-watt unit (circuit 29-9, 29-10, or 29-11, respectively). Operating power for the tone-control circuit can usually be obtained from the power supply for the power amplifier. For operating convenience,

the volume control on the power amplifier may be physically located on the tone-control chassis. In this case, it is advisable to insert a 1-megohm resistor in place of the volume control on the power amplifier. If partial compensation for the reduced high- and low-frequency sensitivity of the ear at low volume levels is desired, the volume-control potentiometer may be replaced by a loudness-control potentiometer.

29-21

**ELECTRONIC VOLT-OHM METER****Circuit Description**


This electronic volt-ohm meter can be used to measure rms values of ac sine-wave voltages from 0.1 to 1500 volts, dc voltages from 0.2 to 1500 volts, peak-to-peak voltages from 0.2 to 4000 volts, and resistances from 0.2 ohms to 1000 megohms. Within these over-all limits, a Range Selector ( $S_1$ ) can be used to select seven different measurement ranges for each measurement function, as shown in the switch-position chart. The mode of operation of the volt-ohm meter is determined by the setting of the five-position (OFF, AC, -DC, +DC, and OHMS) Function Selector ( $S_2$ ). A section ( $S_{2D}$ ) of the Function Selector is also used to control the application of the 117-volt, 60-Hz, input ac power. The ac input power is converted to dc power by the 1N1764 selenium rectifier and associated components. A 6.3-volt secondary winding of power transformer  $T_1$  supplies power to the tube heaters. A neon lamp connected across the primary of power transformer  $T_1$  lights when ac power is applied to the circuit.

A balanced push-pull dc amplifier, which includes a dc microammeter  $M_1$  connected as part of a dc bridge network between the two plate sections of the stage, is used as the basic measuring circuit for each measurement function of the volt-ohm meter. This circuit has a linear response, excellent stability, and a very high input impedance. Calibration adjustments are provided for each mode of operation to assure that accurate measurements are obtained. If desired, the ZERO ADJ potentiometer  $R_{20}$  may be adjusted to provide a center-scale zero reading on the meter, which is useful in discriminator and bias voltage measurements.

For ac voltage measurements, Function Selector  $S_2$  must be rotated to the AC position. The ac voltage to be measured, applied between the AC-OHMS and COMMON terminals, is coupled through contacts 10 and 9 of  $S_{1A}$  to the ac-voltmeter multipliers ( $R_2$  through  $R_4$ ). The ac voltage from one of the taps on the multiplier, as determined by the setting of the

## 29-21

## ELECTRONIC VOLT-OHM METER (Cont'd)

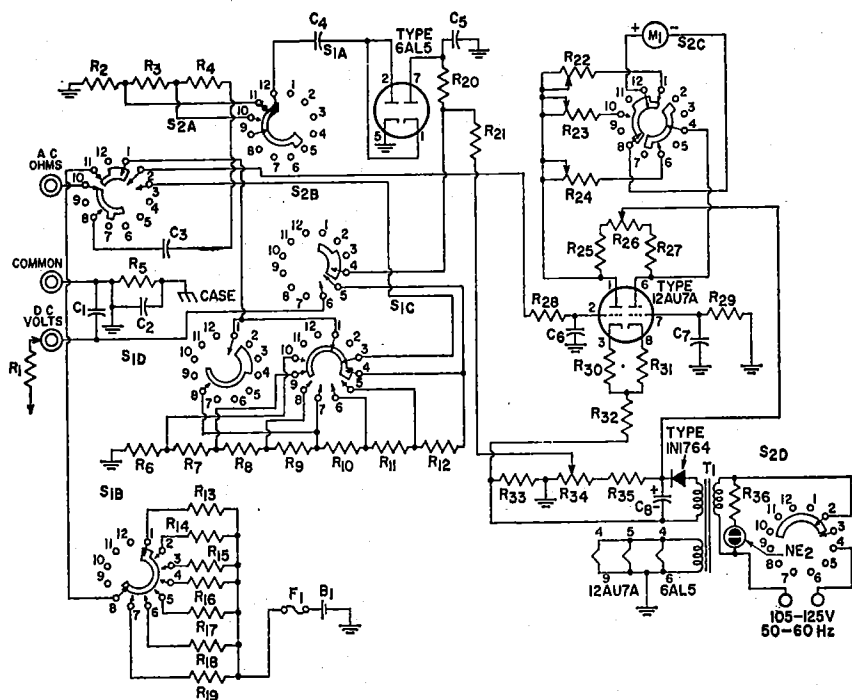

## SWITCH POSITIONS

| Position | Range Selector, S <sub>1</sub> |                       |       | Function Selector, S <sub>2</sub> |
|----------|--------------------------------|-----------------------|-------|-----------------------------------|
| 1        | 1.5V                           | R <sub>x1</sub>       | 4V    | OFF                               |
| 2        | 5V                             | R <sub>x10</sub>      | 14V   | AC VOLT                           |
| 3        | 15V                            | R <sub>x100</sub>     | 40V   | -DC VOLTS                         |
| 4        | 50V                            | R <sub>x1000</sub>    | 140V  | +DC VOLTS                         |
| 5        | 150V                           | R <sub>x10,000</sub>  | 400V  | OHMS                              |
| 6        | 500V                           | R <sub>x100,000</sub> | 1400V |                                   |
| 7        | 1500V                          | R <sub>x1M</sub>      | 4000V |                                   |

Notes: 1. Switches are shown in their maximum counterclockwise position (S<sub>1</sub>=1.5 V, R X 1; S<sub>2</sub>="OFF").

2. The accuracy of the volt-ohm meter depends upon the accuracy of the multiplier resistors.

## Parts List

B<sub>1</sub>=Battery, 1.5 V  
 C<sub>1</sub>=470 pF, ceramic disc, 1600 V  
 C<sub>2</sub>=0.001 μF, ceramic disc, 500 V  
 C<sub>3</sub>=0.47 μF, tubular, 400 V  
 C<sub>4</sub>, C<sub>5</sub>=0.02 μF, ceramic disc, 400 V  
 C<sub>6</sub>, C<sub>7</sub>=0.005 μF, ceramic disc, 200 V

C<sub>8</sub>=10 μF, electrolytic, 400 V  
 F<sub>1</sub>=Fuse, 0.5 ampere  
 M<sub>1</sub>=Meter, dc, 0-200 μA  
 NE<sub>2</sub>=Neon lamp  
 R<sub>1</sub>=DC-voltage probe isolating resistor, 1 megohm, 0.25 watt  
 R<sub>2</sub>=138000 ohms, 0.25 watt  
 R<sub>3</sub>=320000 ohms, 0.5 watt

R<sub>4</sub>=0.9 megohm, 1 watt  
 R<sub>5</sub>, R<sub>18</sub>=1 megohm, 0.25 watt  
 R<sub>6</sub>, R<sub>16</sub>, R<sub>25</sub>, R<sub>27</sub>=10000 ohms, 0.5 watt  
 R<sub>7</sub>=20000 ohms, 0.25 watt  
 R<sub>8</sub>=70000 ohms, 0.25 watt  
 R<sub>9</sub>=0.2 megohm, 0.25 watt  
 R<sub>10</sub>=0.7 megohm, 0.25 watt  
 R<sub>11</sub>=2 megohms, 0.25 watt

## 29-21 ELECTRONIC VOLT-OHM METER (Cont'd)

## Parts List (Cont'd)

|   |  |   |
|---|--|---|
| R <sub>12</sub> =7 megohms, 0.25 watt                                       | 0.5 watt   |   |
| R <sub>13</sub> =8.2 ohms, wire-wound,<br>0.5 watt                          | R <sub>24</sub> =15000 ohms, poten-<br>tiometer, ohms adjustment,<br>0.25 watt | R <sub>35</sub> =47000 ohms, 0.5 watt   |
| R <sub>14</sub> =100 ohms, 0.25 watt  | R <sub>20</sub> =10000 ohms, poten-<br>tiometer, zero adjustment,<br>0.25 watt | R <sub>30</sub> =0.22 megohm, 0.5 watt  |
| R <sub>15</sub> =1000 ohms, 0.25 watt                                       | R <sub>25</sub> =3.3 megohms, 0.5 watt   | S <sub>1</sub> =Range selector switch,<br>7 position, RCA stock No.<br>217924 or equiv.                 |
| R <sub>17</sub> =0.1 megohm, 0.25 watt                                      | R <sub>29</sub> =6.8 megohms, 0.5 watt   | S <sub>2</sub> =Function selector<br>switch, 5 position, RCA<br>stock No. 217923 or equiv.              |
| R <sub>10</sub> =10 megohms, 0.25 watt                                      | R <sub>30</sub> , R <sub>31</sub> =330 ohms, 0.5 watt                          | T <sub>1</sub> =Power transformer,<br>105-125 volts rms. 50-60<br>Hz, RCA stock No. 217921<br>or equiv. |
| R <sub>20</sub> =20 megohms, 0.25 watt                                      | R <sub>32</sub> =15000 ohms, 0.5 watt  |   |
| R <sub>21</sub> =91 megohms, 0.5 watt                                       | R <sub>33</sub> =27000 ohms, 0.5 watt  |   |
| R <sub>22</sub> =10000 ohms, poten-<br>tiometer ac calibration,<br>0.5 watt | R <sub>34</sub> =10000 ohms, poten-<br>tiometer, ac balance,                   |   |
| R <sub>23</sub> =10000 ohms, poten-<br>tiometer dc calibration,             |  |   |

## Circuit Description (Cont'd)

Range Selector (S<sub>1A</sub> section), is rectified by the 6AL5 twin diode. The resultant dc voltage across the rectifier bleeder resistors R<sub>21</sub> and R<sub>34</sub> is proportional to the ac voltage from the multiplier network. This voltage is then coupled through contacts 4 and 5 of S<sub>2B</sub>, through one of the contacts 4 through 10 (as determined by setting of Range Selector) and contact 1 of S<sub>1C</sub>, and through contacts 1 and 2 of S<sub>2A</sub> to the pin 2 control grid of the 12AU7A twin triode in the balanced dc amplifier. This input disturbs the balance of the amplifier and a current proportional to the ac input flows through the dc microammeter connected between the plates of the 12AU7. The pointer on the microammeter is then deflected to indicate the value of the voltage being measured.

With the Function Selector rotated to either -DC or +DC, a dc voltage being measured is coupled through the 1-megohm probe R<sub>1</sub>, the DC VOLTS terminal, and contacts 6 and 5 of S<sub>2B</sub> to the dc-voltmeter multipliers (R<sub>6</sub> through R<sub>12</sub>). The 1-megohm resistance of the dc probe together with the resistance of the multipliers results in an input resistance of 11 megohms for dc voltage measurements. The dc voltage from the appropriate tap on the multiplier network selected by the S<sub>1C</sub> and S<sub>1D</sub> sections of the Range Selector is coupled through contact 1 of these switch sections (or contact

3 of S<sub>1C</sub>) and contacts 1 (or 3) and 2 of S<sub>2A</sub> to the input of the balanced dc amplifier. The pointer of the microammeter in the balanced amplifier is then deflected to provide an indication of the value of the dc voltage being measured. The S<sub>2C</sub> section of the Function Selector reverses the connections of the microammeter when the Function Selector is rotated from -DC to +DC so that current will flow through the microammeter in the same direction regardless of whether a negative or positive dc voltage is being measured.

For resistance measurements, the Function Selector is rotated to the OHMS position, and the external resistance to be measured is connected between the AC-OHMS and COMMON terminals of the volt-ohm meter. A 1.5-volt dry cell then causes current to flow through the external resistance, through contacts 10 and 11 of S<sub>2A</sub>, and through one of the ohmmeter-section multiplier resistors (R<sub>13</sub> through R<sub>19</sub>), as determined by the setting of the Range Selector (S<sub>1B</sub> section). Because the multiplier resistance is fixed for each range, the voltage developed across the external resistance provides an accurate indication of the value of this resistance. This voltage is coupled through contacts 10 and 2 of S<sub>2A</sub> to the input of the balanced dc amplifier. The pointer of the microammeter is then deflected to indicate the value of the resistance being measured.


## 29-22 SERIES-TYPE STABILIZED VOLTAGE SUPPLY

## Circuit Description

This series-type stabilized voltage supply uses type 5651A as a voltage reference tube, type 6080 as a series-regulator tube, and type 5751 as a control tube. In this circuit, the 5651A supplies a fixed reference voltage between the grid of the first unit of the 5751 and its cathode return. Changes in supply voltage to the load are amplified by the 5751 which is connected as a two-stage dc amplifier to control the drop

through the 6080. The resulting output voltage is essentially independent of change in load current.

The voltage regulation of this supply operated at a fixed line voltage of 117 volts and an output voltage of 250 volts is less than 0.2 volt over the current range of 0 to 225 milliamperes. At full current, the regulation for a variation of  $\pm 10$  per cent in line voltage is less than 0.1 volt.

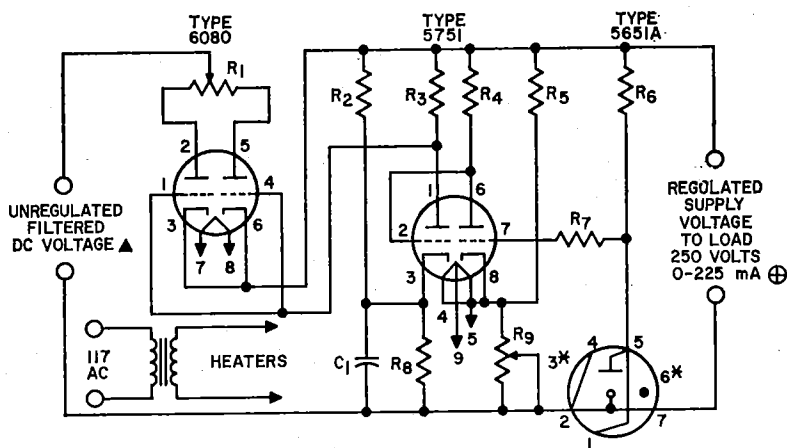

## Parts List

$C_1 = 0.1 \mu\text{F}$ , 400 volts  
 $R_1$  = Plate current balancing potentiometer, 160 ohms, 10 watts  
 $R_2 = 12000$  ohms, 2 watts

$R_3 = 470000$  ohms,  $\frac{1}{2}$  watt  
 $R_4 = 470000$  ohms,  $\frac{1}{2}$  watt  
 $R_5 = 12000$  ohms, 2 watts  
 $R_6 = 68000$  ohms, 1 watt

$R_7 = 1$  megohm,  $\frac{1}{2}$  watt  
 $R_8 = 15000$  ohms, 2 watts  
 $R_9$  = Output voltage-control potentiometer, 10000 ohms

Notes:  $\blacktriangle$  375 volts approx. at zero load current; 325 volts approx. at 225 milliamperes load current.


$\odot$  Socket connections for the 5651A are made so that removal of the 5651A from its socket opens the load.

\* Pins 3 and 6, do not use.




29-23


ALL-PURPOSE DC POWER SUPPLIES

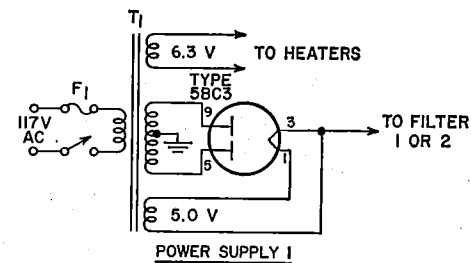


POWER SUPPLY 1

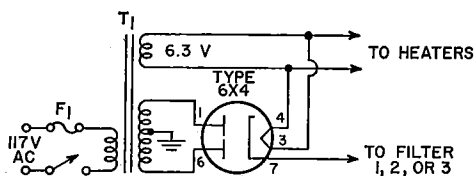


POWER SUPPLY 2



FILTER 1



FILTER 2



FILTER 3

| POWER SUPPLY | TRANS-FORMER  | CHOKE (L <sub>1</sub> )                                     | R <sub>1</sub> | R <sub>2</sub> | C <sub>1</sub> , C <sub>2</sub> | FIL-TER | OUTPUT VOLTS | MA  |
|--------------|---|---|----------------|----------------|---------------------------------|---------|--------------|-----|
| 1<br>(5BC3)  | Stancor<br>PC or PM<br>8177<br>(300-0-300)<br>or equiv. | 140 mA, 7H,<br>165 ohms<br>Stancor C1421<br>or equiv.       | 33 ohms<br>5W  | —              | 40 μF<br>450 Vdc                | 1       | 360          | 60  |
|              |   |   |                |                |                                 |         | 340          | 80  |
|              |   |   |                |                |                                 |         | 320          | 120 |
| 1<br>(5BC3)  | Stancor<br>PC or PM<br>8412<br>(400-0-400)<br>or equiv. | 200mA, 4H,<br>145 ohms<br>Thordarson<br>20C54<br>or equiv.  | 56 ohms<br>10W | —              | 40 μF<br>600 Vdc                | 1       | 450          | 120 |
|              |   |   |                |                |                                 |         | 425          | 160 |
|              |   |   |                |                |                                 |         | 410          | 200 |
| 2<br>(6X4)   | Stancor<br>P-6358<br>(300-0-300)<br>or equiv.           | 80 mA, 12H,<br>375 ohms<br>Thordarson<br>20C53<br>or equiv. | 500 ohms<br>5W | 500 ohms<br>3W | 40 μF<br>450 Vdc                | 1       | 350          | 20  |
|              |   |   |                |                |                                 |         | 300          | 40  |
|              |   |   |                |                |                                 |         | 260          | 60  |
| 2<br>(6X4)   | Stancor<br>PM or PC<br>8419<br>(240-0-240)<br>or equiv. | 80 mA, 12H,<br>375 ohms<br>Thordarson<br>20C53<br>or equiv. | 500 ohms<br>5W | 500 ohms<br>3W | 40 μF<br>450 Vdc                | 1       | 265          | 20  |
|              |   |   |                |                |                                 |         | 225          | 40  |
|              |   |   |                |                |                                 |         | 190          | 60  |
| 2<br>(6X4)   | Stancor<br>PM or PC<br>8419<br>(240-0-240)<br>or equiv. | 80 mA, 12H,<br>375 ohms<br>Thordarson<br>20C53<br>or equiv. | 500 ohms<br>5W | 500 ohms<br>3W | 40 μF<br>450 Vdc                | 2       | 200          | 20  |
|              |   |   |                |                |                                 |         | 180          | 40  |
|              |   |   |                |                |                                 |         | 170          | 60  |
| 2<br>(6X4)   | Stancor<br>PM or PC<br>8419<br>(240-0-240)<br>or equiv. | 80 mA, 12H,<br>375 ohms<br>Thordarson<br>20C53<br>or equiv. | 500 ohms<br>5W | 500 ohms<br>3W | 40 μF<br>450 Vdc                | 3       | 260          | 20  |
|              |   |   |                |                |                                 |         | 220          | 40  |
|              |   |   |                |                |                                 |         | 180          | 60  |

\* Bleeder R<sub>B</sub> can be omitted if an external load is permanently connected across the output terminals. Bleeder current should be approximately 10 per cent of the load current.

## 29-23 ALL-PURPOSE DC POWER SUPPLIES (Cont'd)

## Circuit Description

In these power-supply circuits, 5BC3 and 6X4 full-wave rectifier tubes are used to convert ac input power to dc output power in various combinations of output voltage and load current. The 5BC3 tube is a directly heated novar type intended for use in power supplies for radio equipment, television receivers, and other applications that have relatively high dc requirements. The 6X4 tube is an indirectly heated miniature type used primarily in power supplies for automobile and ac-operated radio receivers and other equipment that have moderate dc requirements.

In each rectifier circuit, the 117-volt ac input power is applied to the primary of a step-up power transformer  $T_1$ . The two plate sections of the rectifier tube are connected to opposite ends of the center-tapped secondary winding of transformer  $T_1$ . With respect to the grounded center tap, the voltage applied to each plate of the rectifier tube, therefore, is 180 degrees out of phase with that applied to the other plate. With an external load connected to the rectifier cathode, pulses of current flow alternately to one plate

and then to the other plate for each half cycle of the ac input power. This 120-Hz pulsating current develops a positive dc voltage across the load circuit.

Removal of virtually all the 120-Hz ripple component from the dc output can be accomplished by connection of a suitable filter network between the rectifier output (cathode) and the load circuit. Either Filter 1 or Filter 2 provides adequate filtering for the 5BC3 circuit. Any one of the three filter networks is satisfactory for use with the 6X4 circuit. Filter 3 is not recommended for use with the 5BC3 circuit because the use of the two resistors  $R_1$  and  $R_2$  in series with the relatively high output results in excessive power loss.

The chart shown with the rectifier circuits lists a wide range of dc output voltage obtainable for various values of load current. Proper selection of power transformer  $T_1$ , of the type of filter network, and of the values of filter choke  $L_1$  and resistors  $R_1$  and  $R_2$  results in the desired combination of output voltage and current.

## BLACK-AND-WHITE TELEVISION RECEIVER

Circuits 29-24 through 29-28 are essentially identical to the corresponding circuits in the RCA-KCS-152 Television Receiver. These circuits comprise a complete intercarrier television receiver with the exception of the deflection coils and the picture tube. Portions of any television receiver, however, are required to operate over an extremely wide range of very high frequencies. The construction of such circuits requires more than ordinary skill and experience and the use of sophisticated test equipment (see general consideration for the construction of high-frequency and broad-band circuits at the beginning of

this section). Home construction of such circuits is not recommended unless the builder has had considerable experience in this type of work.

The chassis of circuits 29-24 through 29-28 are connected to one side of the ac line during operation. Servicing of these circuits should not be attempted by persons not familiar with the following precautions necessary when working on this type of equipment:

1. An isolation transformer should be inserted between the receiver and the ac line before any servicing is attempted.

## BLACK-AND-WHITE TELEVISION RECEIVER (Cont'd)

2. If the receiver must be operated directly from the ac supply, the power plug should be inserted in the proper direction to connect the chassis to the ground side of the ac line. An ac voltmeter should be used to measure

the voltage between the chassis and the power-source ground; no voltage reading should be obtained. If a reading is obtained, the power plug should be reversed and another check made for a zero reading.

29-24

### VHF TUNER

For Black-and-White Television Receiver

#### Circuit Description

This vhf tuner selects the desired vhf frequency channel, amplifies composite video signals in the frequency channel selected, and converts the signal frequencies to the 45.75-MHz picture intermediate frequency and the 41.25-MHz sound intermediate frequency used in television receivers. When used with a uhf tuner, the vhf tuner is operated as a two-stage broadband rf amplifier tuned to 44 MHz (center frequency of the if band) and is essentially a pre-if amplifier for the television receiver. In each mode of operation, the tuner has a band pass that is broad enough to pass all the video information (including synchronizing and equalizing pulses) and the sound information superimposed on the video and sound carrier frequencies and has sufficient selectivity to assure adequate adjacent-channel and image-frequency rejection. The +140 volts used as the B<sup>+</sup> supply for the vhf tuner is obtained from the low-voltage power supply of the receiver. The heaters of the tubes in the circuit are connected in series with those of other tubes in the receiver, and power for the series heater string is obtained directly from the input ac power line.


The antenna used with the vhf tuner may be either a 75-ohm monopole, as used with portable receivers, or a balanced 300-ohm antenna. A balanced 300-ohm antenna system

can be matched to the unbalanced 75-ohm tuner input by means of the antenna-matching balun T<sub>1</sub>. A 13-position channel selector, which consists of several wafer-switch sections (S<sub>1</sub> through S<sub>13</sub>) mounted on a common shaft, establishes the operating frequency of the tuner for each of the vhf channels 2 through 13 or adapts the vhf tuner for operation with a uhf tuner. With S<sub>1</sub> set to any of the channel positions 2 through 13, the selected-channel signal from the vhf antenna is coupled through contacts U and 2 of S<sub>13</sub> and input transformer T<sub>2</sub> to the rf amplifier, and the input lead from the uhf tuner is not connected to the vhf circuit.

The vhf input signals are amplified by the 3GK5 high- $\mu$  frame-grid triode used in the rf amplifier stage. The S<sub>13</sub> section of the channel selector connects the appropriate combination of the inductors L<sub>15</sub> through L<sub>18</sub> into the grid circuit of the rf amplifier to tune this stage to the desired frequency channel. The agc bias voltage applied to the control grid of the 3GK5 triode automatically controls the gain of the rf stage. The bias voltage, which varies directly with the amplitude of the received signal, is derived by a keyed agc amplifier in the television receiver.

The output of the rf amplifier is coupled through a resonant impedance network to the control grid of

## VHF TUNER (Cont'd)

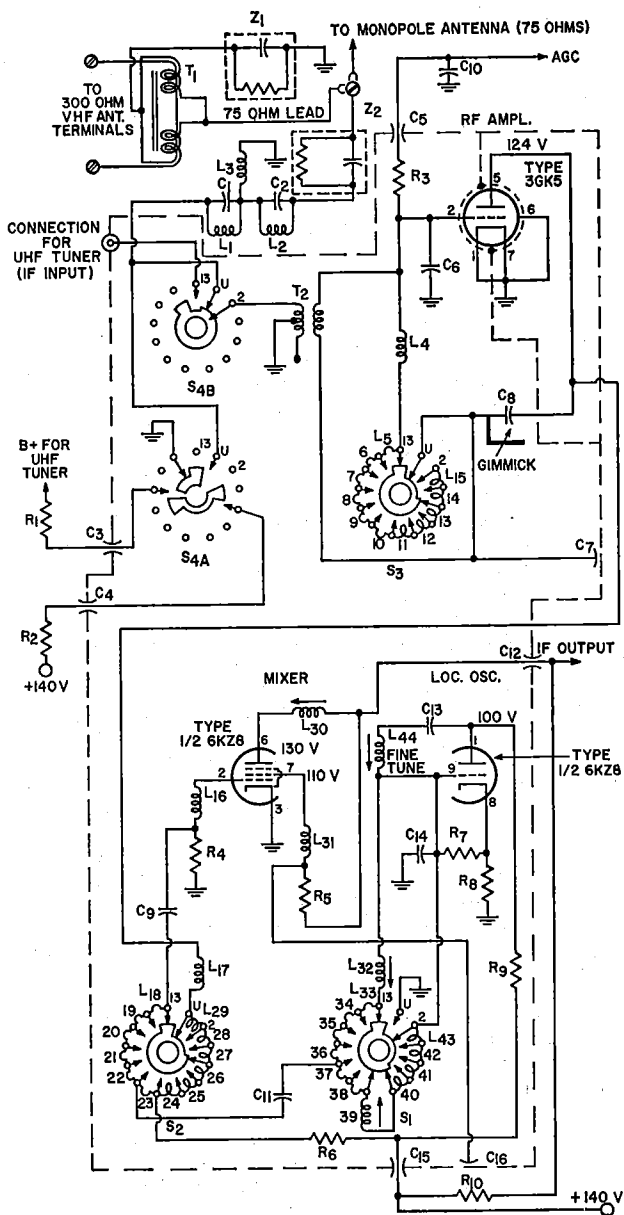

29-24

## VHF TUNER (Cont'd)

## Parts List

- $C_1, C_2=82$  pF,  $\pm 5\%$ , dual disc, ceramic, 500 V, N750  
 $C_3, C_4, C_5, C_{13}=1000$  pF, feedthrough, 500 V  
 $C_6=12$  pF,  $5\%$ , ceramic, 500 V, N750  
 $C_7=20$  pF,  $\pm 5\%$ , feed-through, 500 V, N470  
 $C_8=0.56$  pF,  $\pm 5\%$ , headed lead, 500 V  
 $C_9=100$  pF, ceramic, 500 V, N1500  
 $C_{10}=0.22$   $\mu$ F, ceramic, 500 V  
 $C_{11}=0.82$  pF, headed lead, 500 V  
 $C_{12}=82$  pF,  $\pm 5\%$ , feed-through, 500 V, N750  
 $C_{13}=8$  pF, ceramic, 500 V  
 $C_{14}=10$  pF,  $\pm 5\%$ , radial leads, ceramic, 500 V, N330  
 GIMMICK=Trimmer-capacitor plate  
 $L_1, L_2, L_3=$ RF coils; with two 82-picofarad capacitors, forms high-pass filter (antenna input network), RCA Stock No. 114458 or equiv.  
 $L_4=$ RF amplifier grid coil, part of  $S_3$  assembly  
 $L_5$  through  $L_{15}=$ RF-amplifier tuning coils, part of  $S_3$  assembly  
 $L_{16}=$ Mixer grid coil, part of  $S_2$  assembly  
 $L_{17}=$ Interstage coupling coil for rf amplifier and mixer, part of  $S_2$  assembly  
 $L_{18}$  through  $L_{20}=$ Mixer tuning coils, part of  $S_2$  assembly  
 $L_{30}=$ Variable rf coil; mixer plate tuning adjustment; RCA Stock No. 112909 or equiv.  
 $L_{31}=$ RF choke  
 $L_{32}=$ Variable rf coil; local-oscillator tuning adjustment for channel 13  
 $L_{33}$  through  $L_{43}=$ Local-oscillator tuning coils (variable coil  $L_{39}$  is tuning adjustment for channel 6), part of  $S_1$  assembly  
 $L_{44}=$ Variable rf coil; fine-tuning control; RCA Stock No. 113323, or equiv.  
 $R_1=4700$  ohms, 1 watt  
 $R_2=6600$  ohms, 0.5 watt  
 $R_3=47000$  ohms, 0.5 watt  
 $R_4=0.1$  megohm, 0.5 watt  
 $R_5, R_7=10000$  ohms, 0.5 watt  
 $R_6, R_{10}=1000$  ohms, 0.5 watt  
 $R_8=2200$  ohms, 0.5 watt  
 $R_9=6800$  ohms, 0.5 watt  
 $S_1=$ Local-oscillator section of channel-selector switch; stator assembly, RCA Stock No. 114462 or equiv., includes local-oscillator tuning coils  $L_{33}$  through  $L_{43}$   
 $S_2=$ Mixer section of channel-selector switch; stator assembly, RCA Stock No. 114461 or equiv., includes mixer tuning coils  $L_5, L_6,$  and  $L_{18}$  through  $L_{20}$   
 $S_3=$ RF amplifier section of channel-selector switch; stator assembly, RCA Stock No. 114460 or equiv., includes rf-amplifier tuning coils  $L_4$  and  $L_7$  through  $L_{17}$   
 $S_4=$ VHF-UHF function selector; two-section switch ganged with channel selectors,  $S_1, S_2,$  and  $S_3$ ; RCA Stock No. 114185 or equiv.  
 $T_1=$ Antenna-matching balun; matches 300-ohm balanced antenna-lead line to 75-ohm unbalanced receiver-input line; RCA Stock No. 111973 or equiv.  
 $T_2=$ Antenna transformer; RCA Stock No. 113195 or equiv.  
 $Z_1, Z_2=$ Resistance-capacitance network (capristor), RCA Stock No. 109956 or equiv.

- Notes: 1. All switches are ganged together on same shaft and are shown with shaft in channel 13 position.  
 2. Voltages shown are obtained with no signal input.  
 3. For dc voltage and heater supply, see circuit 29-28, page 721.  
 4. See additional notes on page 708.

## Circuit Description (Cont'd)

the 6KZ8 pentode section used in the mixer stage. Section  $S_2$  of the ganged channel selector selects the proper combination of the inductors  $L_{18}$  through  $L_{20}$  to tune the mixer input circuit to the same operating frequency as that of the rf amplifier. A signal from the plate of the 6KZ8 triode section used in the local-oscillator stage is also applied to the input circuit of the mixer. Section  $S_1$  of the channel selector connects the right combination of the inductors  $L_{33}$  through  $L_{43}$  into the oscillator resonant circuit to maintain the operating frequency of the oscillator at 45.75 MHz above the video carrier frequency (41.25 MHz above the sound carrier frequency) of the vhf channel selected by the tuner. Inductor  $L_{44}$  in the series-resonant feedback circuit of the oscillator is the fine-

tuning adjustment for the vhf tuner. This adjustment assures that the oscillator frequency accurately tracks the input tuning in each channel.

The signals from the rf amplifier and the local oscillator are heterodyned in the mixer stage to produce the 45.75-MHz amplitude-modulated and 41.25-MHz frequency-modulated difference frequencies used as the picture and sound intermediate frequencies, respectively, in the television receiver. The picture and sound if signals are coupled from the plate of the mixer to the if stages of the receiver.

When the multiple-section channel selector is rotated to the U position (for uhf operation), a connection from the B+ line of the vhf tuner through a 5600-ohm dropping resistor  $R_3$ , contacts 4 and 10 of  $S_{4A}$ ,

## 29-24

**VHF TUNER (Cont'd)****Circuit Description (Cont'd)**

and a 4700-ohm dropping resistor  $R_1$  provides the B+ voltage for the uhf tuner. In addition, transformer  $T_2$ , which provides the input to the rf amplifier, is connected through contacts 2 and 13 of  $S_{1B}$  to the output of the uhf tuner, and the signal from the vhf antenna is shorted to ground through contacts U and 12 of  $S_{1A}$ . The input to the rf amplifier is then the amplitude-modulated 45.75-MHz picture if and frequency-modulated 41.25-MHz sound if signals from the uhf tuner.

In the U positions, switch sec-

tions  $S_3$  and  $S_2$  select the tuning inductors required for operation of the rf amplifier and mixer stages as broadband 44-MHz amplifiers, and section  $S_1$  disables the oscillator stage by connection of the oscillator control grid directly to ground through switch contacts 2 and U. With these changes, the vhf tuner essentially becomes a broadband 44-MHz amplifier which provides two stages of amplification of the picture and sound if signals ahead of the receiver main if strip.

## 29-25

**VIDEO-IF AMPLIFIERS AND SOUND-CHANNEL CIRCUITS**

For Black-and-White Television Receiver

**Circuit Description**

These circuit stages are typical of those used in the if and audio channels of any intercarrier type of black-and-white television receiver. The over-all circuit operates from a dc supply of +150 volts obtained from the receiver low-voltage (B+) dc power supply. The heaters of the tubes in the circuit are connected in series with those of tubes in other sections of the receiver. Operating power for the series heater string is obtained directly from the 117-volt ac power line.




The input from the vhf tuner consists of amplitude-modulated 45.75-MHz picture if signals and frequency-modulated 41.25-MHz sound if signals. This composite input is coupled by a broadly tuned bandpass filter network to the control grid of the 4JD6 remote-cutoff pentode used in the first picture if amplifier. A dc bias voltage proportional to the input signal from the age amplifier is also applied to the control-grid circuit to provide automatic gain control of this stage. The output of the first picture if amplifier is coupled by the single-tuned transformer  $T_1$  to the control grid of the 4JC6A pentode used in the second picture if amplifier. The double-tuned trans-

former  $T_2$  couples the output of this stage to the video detector ( $CR_1$  and associated components). The input filter network and picture if transformers  $T_1$  and  $T_2$  are stagger tuned to obtain the broad response for the if amplifiers required to assure adequate passage of both the 45.75-MHz video and 41.25-MHz sound if signals.

The video detector demodulates the 45.75-MHz picture if signal, and the resultant video signal is coupled through inductors  $L_5$  and  $L_7$  and the lower winding of transformer  $T_3$  to the video amplifier (shown in circuit 29-27). The video detector also operates as a second mixer circuit. The 45.75-MHz picture if signal and the 41.25 sound if signal are heterodyned to produce a second sound if carrier of 4.5 MHz. This 4.5-MHz second sound if carrier is still frequency-modulated by the audio components contained in the original rf signal input at the receiver antenna. The sound-takeoff transformer  $T_3$ , which forms a selective load impedance for the detector circuit at 4.5 MHz, couples the 4.5-MHz sound if signal to the control grid of the pentode section of a 6GH8A triode pentode used in the sound if ampli-

29-25

## VIDEO-IF AMPLIFIERS AND SOUND-CHANNEL CIRCUITS (Cont'd)

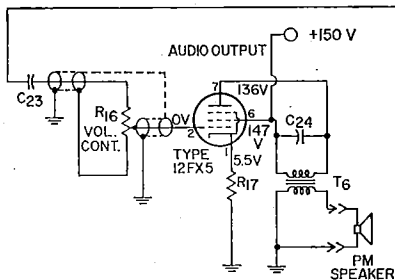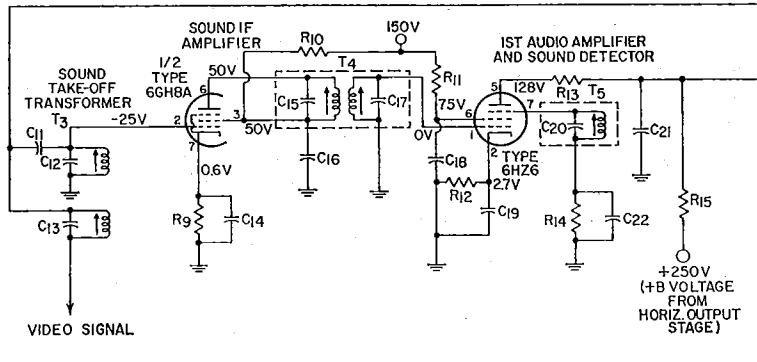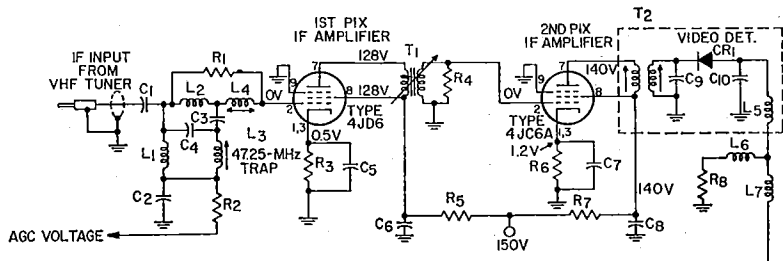

### Parts List

C<sub>1</sub>, C<sub>8</sub>=470 pF, ceramic, 500 V  
 C<sub>2</sub>, C<sub>7</sub>=0.001 μF, ceramic 500 V  
 C<sub>3</sub>=7 pF, ceramic, 500 V, N150  
 C<sub>4</sub>=2 pF, ceramic, 500 V, NPO  
 C<sub>5</sub>=56 pF, ±5%, ceramic, 500 V, N750  
 C<sub>6</sub>=560 pF, ceramic, 500 V  
 C<sub>9</sub>=18 pF, 5%, ceramic, 500 V, N220  
 C<sub>10</sub>=6 pF, ceramic, 500 V  
 C<sub>11</sub>=10 pF, ceramic, 500 V, NPO  
 C<sub>12</sub>=39 pF, ceramic, 500 V, N150  
 C<sub>13</sub>=68 pF, ceramic, 500 V, N750

C<sub>14</sub>, C<sub>16</sub>=0.01 μF, ceramic, 500 V  
 C<sub>15</sub>, C<sub>17</sub>=12 pF, part of T<sub>4</sub>  
 C<sub>18</sub>, C<sub>19</sub>=0.0022 μF, ceramic, 500 V  
 C<sub>20</sub>=10 pF, part of T<sub>5</sub>  
 C<sub>21</sub>=680 pF, ceramic, 500 V  
 C<sub>22</sub>=0.047 μF, paper, 200 V  
 C<sub>23</sub>=0.01 μF, ceramic, 500 V  
 C<sub>24</sub>=0.0068 μF, ceramic, 500 V  
 CR<sub>1</sub>=Video detector, crystal diode, RCA Stock No. 112524 or equiv.  
 L<sub>1</sub>=RF coil, RCA Stock No. 114315 or equiv.  
 L<sub>2</sub>=RF coil, RCA Stock No. 114314 or equiv.  
 L<sub>3</sub>=RF coil, 47.25-MHz trap

RCA Stock No. 113097 or equiv.  
 L<sub>4</sub>=RF coil, RCA Stock No. 113097 or equiv.  
 L<sub>5</sub>=Video-detector peaking coil, 36 μH, RCA Stock No. 109758 or equiv.  
 L<sub>7</sub>=Filter choke (reactor), 2.7 μH, RCA Stock No. 107463 or equiv.  
 R<sub>1</sub>=3300 ohms, 0.5 watt  
 R<sub>2</sub>=1000 ohms, 0.5 watt  
 R<sub>3</sub>=39 ohms, ±5%, 0.5 watt  
 R<sub>4</sub>=4700 ohms, ±5%, 0.5 watt  
 R<sub>5</sub>=1500 ohms, 1 watt  
 R<sub>6</sub>=100 ohms, 0.5 watt  
 R<sub>7</sub>=470 ohms, 0.5 watt  
 R<sub>8</sub>=3000 ohms, ±5%, 0.5 watt

## 29-25

## VIDEO-IF AMPLIFIERS AND SOUND-CHANNEL CIRCUITS (Cont'd)

### Parts List (Cont'd)

$R_6=820$  ohms, 0.5 watt  
 $R_{10}=82000$  ohms, 0.5 watt  
 $R_{11}=15000$  ohms, 1 watt  
 $R_{12}=660$  ohms, 0.5 watt  
 $R_{13}=470$  ohms, 0.5 watt  
 $R_{14}=0.47$  megohm, 0.5 watt  
 $R_{15}=0.39$  megohm, 0.5 watt  
 $R_{16}$ =Volume control, potentiometer, 1 megohm  
 $R_{17}=180$  ohms, 0.5 watt  
 $T_1$ =First pix if transformer,

RCA Stock No. 109158  
 or equiv.  
 $T_2$ =Second pix if transformer, RCA Stock No. 114317 or equiv.  
 $T_3$ =Sound take-off transformer, 4.5-MHz, RCA Stock No. 114489 or equiv.  
 $T_4$ =Sound if transformer (includes primary and secondary capacitors),

RCA Stock No. 104137  
 or equiv.  
 $T_5$ =Sound detector resonant circuit (includes 10-pF capacitor), RCA Stock No. 109948 or equiv.  
 $T_6$ =Audio output transformer, matches speaker voice-coil impedance to tube plate load, RCA Stock No. 114490 or equiv.

**Notes:** 1. Voltages shown are obtained with no signal input.  
 2. For dc voltage and heater supply, see circuit 29-28, page 721.  
 3. See additional notes on page 708.

### Circuit Description (Cont'd)

fier. The amplified if signal from this stage is coupled by the doubled-tuned 4.5-MHz transformer  $T_4$  to the 6HZ6 audio detector-amplifier stage. This stage demodulates the 4.5-MHz sound if signal and amplifies the resultant audio signal voltage. The +250 volts used as the plate supply for the 6HZ6 is obtained from the horizontal output stage (shown in circuit 29-27 of the receiver.

The audio-signal power required

to drive the speaker is developed by a 12FX5 pentode used in a single-ended audio output stage. The audio-signal voltage from the plate of the audio detector-amplifier is amplified by the 12FX5 and coupled by transformer  $T_6$  to the voice coil of the speaker. The volume-control potentiometer  $R_{16}$  in the input circuit of the output stage provides manual adjustment of the sound level from the speaker.

## 29-26

## VIDEO, AGC, AND SYNC AMPLIFIERS

For Black-and-White TV Receiver

### Circuit Description

This circuit shows video, agc, and sync amplifiers for a black-and-white television receiver. The video and sync amplifiers operate from a plate supply ( $B+$ ) voltage of 150 volts obtained from the receiver low-voltage power supply. The plate supply voltage for the agc amplifier is a positive keying pulse from the high-voltage transformer in the receiver. The heaters of the three tubes are connected in series with those of tubes in other sections of the receiver. Operating power for the series heater string is obtained directly from the ac power line.


In the video amplifier, the pentode section of an 11LQ8 triode-pentode provides the required amplification of the video signal. The video signal is coupled from the video detector to the control grid of the video amplifier. The output from the voltage divider in the plate cir-

cuit of this stage is applied to the cathode of the picture tube to intensity-modulate the electron beam during its vertical and horizontal scanning of the picture-tube screen. The contrast control adjusts both the amplitude of the video output and the dc potential at the cathode of the picture tube to control picture contrast. The voltage-divider network in the plate circuit of the video amplifier is interconnected with another voltage-divider network. This second network includes the brightness control and the width control in the screen-grid circuit of the receiver horizontal-output tube (shown in circuit 29-27. The brightness control adjusts the cathode bias on the picture tube to control the intensity of the screen display.

An output from the video amplifier is also applied to the control grid of the 11LQ8 triode section used



## 29-26 VIDEO, AGC, AND SYNC AMPLIFIERS (Cont'd)

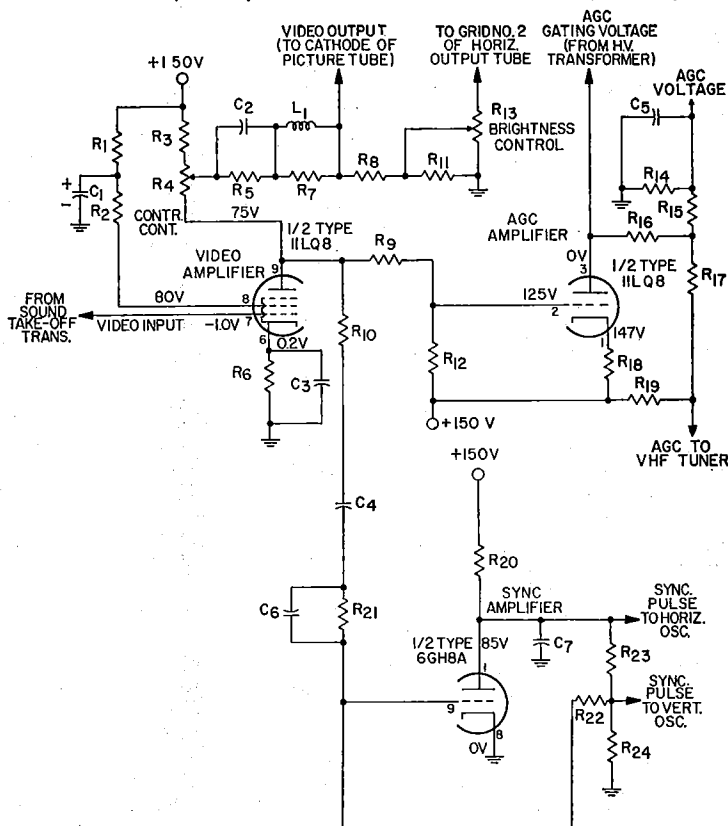

- Notes: 1. Voltages shown are obtained with no signal input.  
 2. For dc voltage and heater supply, see circuit 29-28, page 721.  
 3. See additional notes on page 708.

## Parts List

$C_1=5 \mu\text{F}$ , electrolytic, 150 V  
 $C_2=0.15 \mu\text{F}$ , paper, 200 V  
 $C_3=0.033$ , paper, 200 V  
 $C_4=0.0047$ , ceramic, 500 V  
 $C_5=0.1 \mu\text{F}$ , paper, 200 V  
 $C_6=470 \text{ pF}$ , ceramic, 500 V  
 $C_7=100 \text{ pF}$ , ceramic, 500 V, N1500  
 $L_1$ =Video-amplifier peaking coil, 18  $\mu\text{H}$ , RCA Stock No. 109946 or equiv.  
 $R_1=18000$  ohms, 0.5 watt

$R_2=330$  ohms, 0.5 watt  
 $R_3=1500$  ohms, 0.5 watt  
 $R_4$ =Contrast control, potentiometer, 4000 ohms, 3 watts  
 $R_5=1$  megohm, 0.5 watt  
 $R_6=10$  ohms,  $\pm 5\%$ , 0.5 watt  
 $R_7=22000$  ohms, 0.5 watt  
 $R_8=0.27$  megohm, 0.5 watt  
 $R_9, R_{10}, R_{20}=27000$  ohms, 0.5 watt  
 $R_{11}=27000$  ohms, 1 watt

$R_{12}=18000$  ohms, 0.5 watt  
 $R_{13}$ =Brightness control, potentiometer, 0.1 megohm  
 $R_{14}, R_{17}=0.82$  megohm, 0.5 watt  
 $R_{16}=1$  megohm, 0.5 watt  
 $R_{18}, R_{21}=0.68$  megohm, 0.5 watt  
 $R_{18}=3300$  ohms, 0.5 watt  
 $R_{19}=8.2$  megohms, 0.5 watt  
 $R_{22}=5.2$  megohms, 0.5 watt  
 $R_{23}=33000$  ohms, 0.5 watt  
 $R_{24}=15000$  ohms, 0.5 watt

## Circuit Description (Cont'd)

in a keyed-agc amplifier stage. The operation of the agc amplifier is gated (keyed) by a positive pulse from the high-voltage power transformer (shown in circuit 29-27).

This 450-volt keying pulse, which is synchronized with the video signal, overcomes the bias provided by the 150 volts applied to the cathode circuit and serves as the plate supply

## 29-26 VIDEO, AGC, AND SYNC AMPLIFIERS (Cont'd)

### Circuit Description (Cont'd)

voltage for the agc amplifier. Portions of the video signal that occur coincident with the keying pulse are amplified by the agc stage. A 0.1-microfarad capacitor  $C_6$  and a 0.82-megohm resistor  $R_{14}$  in the plate circuit of this stage filter out the pulsating components to obtain a negative dc voltage proportional to the video signal and thus to the rf input at the receiver antenna. The negative voltage developed in the plate circuit of the stage is applied as agc bias to the first picture if amplifier and to the rf amplifier in the vhf tuner.

Synchronizing pulses are included in the video signals transmitted by a television broadcast station to provide timing information required for synchronization of the transmitter and receiver scanning systems. The sync amplifier, or separator, separates and amplifies the

synchronizing pulses contained in the composite video signal it receives from the plate circuit of the video amplifier. The circuit uses the triode section of a 6GH8A triode-pentode to develop the synchronizing pulses for the vertical- and horizontal-deflection circuits of the receiver. The sync amplifier is basically a class C limiter stage. With the video signal applied, the stage is biased beyond cutoff by the grid-leak bias network formed by the 470-picofarad capacitor  $C_6$  and the 0.68-megohm resistor  $R_{21}$  in the control-grid circuit. Only the sync pulses in the composite video signal have sufficient amplitude to drive the sync amplifier into conduction. The resultant pulses developed across the output voltage-divider network are used as the synchronizing inputs to the horizontal- and vertical-deflection circuits.

## 29-27 VERTICAL- AND HORIZONTAL-DEFLECTION CIRCUITS AND HIGH-VOLTAGE RECTIFIER

For Black-and-White Television Receiver

### Circuit Description


These circuits develop the vertical and horizontal scanning signals and the dc operating potentials for the picture tube (RCA Type 16BGP4) used in the black-and-white television receiver and the boosted B+ voltage (+250 volts) used in the audio detector-amplifier (part of circuit 29-26). The circuits operate from a dc supply of 150 volts. With the exception of the 1G3GT (or 1B3GT) high-voltage rectifier tube, the heaters of the various tubes are connected in series with those of tubes in other sections of the receiver and are supplied by the input ac power line. Heater power for the 1G3GT (or 1B3GT) is provided by a 1.25-volt winding of the high-voltage transformer  $T_1$ .

The vertical- and horizontal-deflection circuits are synchronized by negative signals from the sync

amplifier (separator) which include horizontal sync pulses, equalizing pulses, and vertical sync pulses. When the composite video signal is generated at the television broadcast station, the leading edge of each horizontal sync pulse, of alternate equalizing pulses, and of alternate serrations of the vertical sync pulses are correctly timed to initiate the horizontal-retrace period. It is necessary, therefore, to extract the leading-edge components from the combined sync waveform prior to application of the synchronizing input to the horizontal-deflection circuit. Similarly, the vertical sync pulses must be separated from the combined waveform before they can be used to synchronize the vertical-deflection circuit.

The combined sync waveform is differentiated at the input to the

## 29-27 VERTICAL- AND HORIZONTAL-DEFLECTION CIRCUITS AND HIGH-VOLTAGE RECTIFIER (Cont'd)

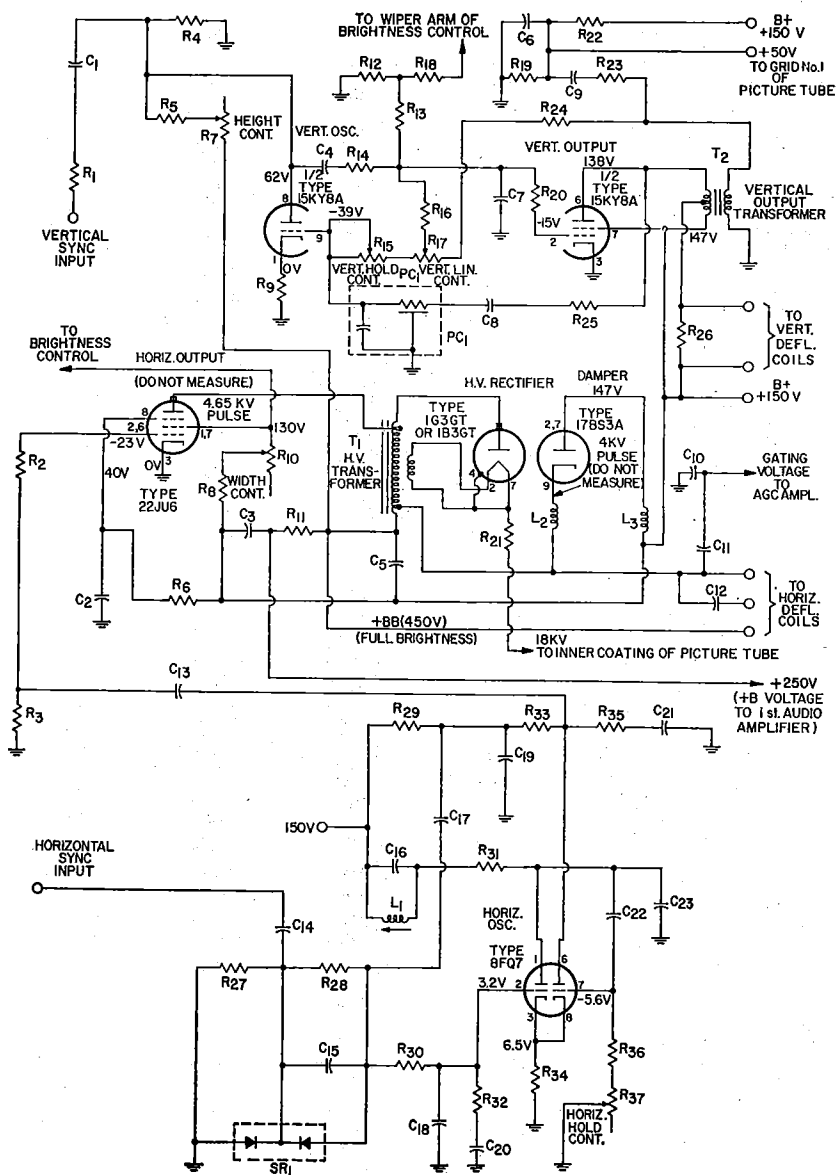

- Notes:**
1. Voltages shown are obtained with no signal input.
  2. For dc voltage and heater supply, see circuit 29-28, page 721.
  3. See additional notes on page 708.

## 29-27 VERTICAL- AND HORIZONTAL-DEFLECTION CIRCUITS AND HIGH-VOLTAGE RECTIFIER (Cont'd)

### Parts List

|   |   |   |
|---|---|---|
| $C_1=0.0039 \mu\text{F}$ , ceramic, 500 V, N5600                | NPO   | control, potentiometer, 0.2 megohm  |
| $C_2=0.01 \mu\text{F}$ , ceramic, 500 V                         | $L_1=$ Oscillator coil, RCA Stock No. 114486 or equiv.  | $R_{18}=0.47$ megohm, 0.5 watt  |
| $C_3, C_6=0.047 \mu\text{F}$ , paper, 200 V                     | $L_2, L_3=$ RF chokes (reactors), 8.2 $\mu\text{H}$ , RCA Stock No. 107385 or equiv.  | $R_{19}, R_{25}=27000$ ohms, 0.5 watt   |
| $C_4=0.033 \mu\text{F}$ , paper, 200 V                          | $PC_1=$ Printed circuit (includes 0.001- $\mu\text{F}$ and 0.0024- $\mu\text{F}$ capacitors and 68000-ohm resistor), RCA Stock No. 114606 or equiv. | $R_{20}, R_{21}=1000$ ohms, 0.5 watt  |
| $C_5=0.027 \mu\text{F}$ , paper, 600 V                          |   | $R_{22}=68000$ ohms, 0.5 watt   |
| $C_8=0.015 \mu\text{F}$ , tubular paper, 200 V                  |   | $R_{23}=10000$ ohms, 0.5 watt   |
| $C_7=0.022 \mu\text{F}$ , paper, 200 V                          |   | $R_{24}=0.18$ megohm, 0.5 watt  |
| $C_8=0.0022 \mu\text{F}$ , paper, 1000 V                        |   | $R_{26}=820$ ohms, 0.5 watt   |
| $C_{10}=0.0012 \mu\text{F}$ , $\pm 5\%$ , ceramic, 500 V, N3900 | $R_1=0.1$ megohm, 0.5 watt  | $R_{27}=0.15$ megohm, 0.5 watt  |
| $C_{11}=180$ pF, $\pm 5\%$ , ceramic, 5000 V, N2200             | $R_2=47$ ohms, 0.5 watt   | $R_{28}=0.39$ megohm, 0.5 watt  |
| $C_{12}=47$ pF, ceramic, 2500 V, N1500                          | $R_3, R_4=0.82$ megohm, 0.5 watt  | $R_{29}=12000$ ohms, 0.5 watt   |
| $C_{13}=0.0033 \mu\text{F}$ , ceramic, 500 V                    | $R_5=2.2$ megohms, 0.5 watt   | $R_{30}=1$ megohm, 0.5 watt   |
| $C_{14}=68$ pF, paper, 500 V, N1500                             | $R_6=47000$ ohms, 0.5 watt  | $R_{31}=15000$ ohms, 0.5 watt   |
| $C_{15}=470$ pF, ceramic, 500 V                                 | $R_7=$ Height control, potentiometer, 0.75 megohm   | $R_{32}=68000$ ohms, 0.5 watt   |
| $C_{16}=0.0039 \mu\text{F}$ , mylar, 400 V                      | $R_8=320$ ohms, 1 watt  | $R_{33}=33000$ ohms, 0.5 watt   |
| $C_{17}=0.001 \mu\text{F}$ , ceramic, 500 V                     | $R_9=3300$ ohms, 0.5 watt   | $R_{34}=1500$ ohms, $\pm 5\%$ , 0.5 watt  |
| $C_{18}=0.0033 \mu\text{F}$ , ceramic, 500 V                    | $R_{10}=$ Width control, potentiometer, 2000 ohms, 3 watts  | $R_{35}=4700$ ohms, 0.5 watt  |
| $C_{19}=0.001 \mu\text{F}$ , ceramic, 500 V                     | $R_{11}=0.68$ megohm, 0.5 watt  | $R_{36}=47000$ ohms, 0.5 watt   |
| $C_{20}=0.056 \mu\text{F}$ , paper, 200 V                       | $R_{12}=47000$ ohms, 0.5 watt   | $R_{37}=$ Horizontal-hold control, potentiometer, 70000 ohms.                         |
| $C_{21}=150$ pF, ceramic, 500 V                                 | $R_{13}=22$ megohms, 0.5 watt   | $SR_1=$ Selenium rectifier, RCA Stock No. 109474 or equiv.                            |
| $C_{22}=390$ pF, mica, 500                                      | $R_{14}=22000$ ohms, 0.5 watt   | $T_1=$ High-voltage and horizontal-output transformer, RCA Stock No. 114498 or equiv. |
| $C_{23}=68$ pF, ceramic, 500 V,                                 | $R_{15}=$ Vertical-hold control, potentiometer, 0.75 megohm   | $T_2=$ Vertical-output transformer, RCA Stock No. 114502 or equiv.                    |
|   | $R_{16}=1.8$ megohms, 0.5 watt  |   |
|   | $R_{17}=$ Vertical-linearity  |   |

### Circuit Description (Cont'd)

horizontal-deflection circuit to obtain negative and positive voltage spikes which correspond to the leading and lagging edges, respectively, of the rectangular sync pulses. The amplitude of these voltage spikes is dependent upon only the peak value of the sync pulses and is not affected by the time durations of these pulses. The differentiating circuit, therefore, does not respond to the flat portions of the vertical sync pulses, and, with the exceptions of the serrations, the vertical sync pulses do not affect the operation of the horizontal-deflection circuits. The leading edge of alternate serrations, however, corresponds to the start of horizontal-retrace periods and thus may be considered as merely another horizontal sync signal.

The differentiated sync waveform is applied to the junction of the twin silicon diodes  $SR_1$  used in a phase-discriminator network. The positive portion of the differentiated waveform has no effect on the discriminator network. The negative

portion is compared with a feedback signal from the horizontal oscillator to derive the synchronizing voltage. The frequency of the horizontal oscillator and the repetition rate of the horizontal sync pulses should both be 15,750 Hz, the desired horizontal scanning rate for the picture tube. If the feedback signal from the oscillator does not occur coincident with the horizontal sync pulse, the phase discriminator develops a dc error voltage at the control grid of the input section of the 8FQ7 twin triode used in the oscillator stage. The resultant change in oscillator bias shifts the phase of the oscillator signal until it is locked in phase with the horizontal sync pulse.

The horizontal oscillator is basically a cathode-coupled multivibrator that free-runs, in asymmetrical half cycles, at a frequency of 15,750 Hz. A parallel LC circuit connected in series with the plate of the input section resonates at 15,750 Hz to provide frequency stabilization for the horizontal oscillator. The HOLD con-

## 29-27 VERTICAL- AND HORIZONTAL-DEFLECTION CIRCUITS AND HIGH-VOLTAGE RECTIFIER (Cont'd)

### Circuit Description (Cont'd)

trol adjusts the basic multivibrator frequency to achieve an exact lock-in with the horizontal sync pulses. In a cathode-coupled multivibrator, one amplifier section conducts at saturation and the other section is cut off during one half-cycle of operation, and these states are automatically reversed for the next half cycle. Such circuits normally provide rectangular-wave outputs from each plate section that are 180 degrees out of phase and that switch between the saturation plate voltage and  $B^+$  (i.e., the cutoff plate voltage).

In the horizontal oscillator a series RC network is connected in parallel with the output tube section. Because of this network, the plate voltage does not immediately rise to the  $B^+$  value when the output tube section is cut off. Instead, there is a small immediate rise in plate voltage that results from the voltage drop across the resistor  $R_{35}$  in the output RC network produced by the initial charging current to the capacitor  $C_{21}$ . The plate voltage then rises gradually at a rate determined by the long-time-constant circuit through which the capacitor is charged. Before the capacitor can fully charge to the  $B^+$  voltage, the combination of the horizontal sync input and the feedback signal from the plate of the output section of the oscillator drives the grid of the input section below cutoff. The instantaneous rise in the plate voltage of the input section is coupled to the grid of the output section and causes this section to conduct. The capacitor  $C_{21}$  in the output RC network is then quickly discharged through the series resistor and the relatively low resistance of the output tube section. The output of the horizontal oscillator, therefore, is a trapezoidal voltage wave. The rising-slope portions of this wave (obtained when the output tube section is cut off)

corresponds to the horizontal-trace period on the picture tube; the discharge portion of the trapezoidal wave corresponds to the retrace period. The time-constant coupling circuits between the input and output sections of the oscillator are designed so that the retrace period represents only about 5 to 10 per cent of the over-all oscillator cycle.

The trapezoidal voltage wave is coupled to the control grid of the 22JU6 pentode horizontal-output stage and causes a sawtooth current to flow through the high-voltage (flyback) transformer  $T_1$  and through the horizontal-deflection coils of the picture tube. The gradually rising portion of the sawtooth current causes the horizontal scanning of the picture tube; the more rapid negative-slope portion of the current wave causes the retrace. During the retrace period, the picture-tube screen is blanked by a negative pulse applied to the control grid of the picture tube from the vertical-deflection circuits. The WIDTH control  $R_{10}$  in the screen grid of the horizontal-output stage adjusts the gain of this stage to control the width of horizontal scanning.

The vertical oscillator employs a 15KY8A triode-pentode in a basic plate-coupled multivibrator configuration. This free-running 60-Hz multivibrator is synchronized by the vertical sync pulses. The vertical pulses are separated from the combined sync waveform by integration of the combined waveform across the 0.022-microfarad capacitor  $C_7$  in the control-grid circuit of the pentode output section of the multivibrator. The integrating network has negligible response for the narrow horizontal sync and equalizing pulses, but responds to the greater energy included in the much wider vertical sync pulses to develop a triangular voltage wave at the control grid of the pentode output section. The

## 29-27 VERTICAL- AND HORIZONTAL-DEFLECTION CIRCUITS AND HIGH-VOLTAGE RECTIFIER (Cont'd)

### Circuit Description (Cont'd)

VERT LIN potentiometer  $R_{17}$  adjusts the charging period of the integrating capacitor to control vertical linearity. The VERT HOLD potentiometer  $R_{18}$  adjusts the frequency of the multivibrator to achieve an exact lock-in with the vertical sync pulses.

The voltage waveform at the control grid of the pentode output section results in a triangular wave of current through the vertical-output transformer  $T_2$  and through the vertical-deflection coils of the picture tube. The rising portion of the triangular current wave produces the vertical scanning, and the decreasing portion of the wave provides the retrace. Blanking pulses to cut off the picture tube during vertical and horizontal retrace periods are coupled from the secondary of  $T_2$  and from the VERT LIN potentiometer (combined sync waveform before integration) to the control grid of the picture tube.

The 1G3GT (or 1B3GT) half-wave rectifier circuit develops the dc operating voltages for the picture tube. The ac input power to the rectifier is supplied by the horizontal-deflection circuits. The sudden cutoff of plate current in the horizontal-output stage at the beginning of the retrace period causes a very large, positive-going voltage pulse

to be generated across the high-voltage transformer  $T_1$ . The rectifier converts this voltage pulse to a dc output voltage of approximately 18,000 volts, which is applied to the inner coating of the picture tube. Removal of negative overshoots that would be developed across the high-voltage transformer because of a flywheel effect is accomplished by connection of a 17BS3A rectifier (damper) tube across the horizontal-deflection coils which are in parallel with the lower tapped section of the high-voltage transformer. The polarity of the damper tube is such that the positive pulse developed across the high-voltage transformer causes no current flow through it. For negative pulses, however, the damper tube provides a low-impedance path for the current, and energy stored in the horizontal-deflection coils during the preceding half-cycle is dissipated as heat at the damper-tube plate to prevent oscillation in the coils. The current through the damper tube develops a dc voltage of 450 volts across the 0.027-microfarad capacitor  $C_8$  in the cathode circuit. The 0.68-megohm dropping resistor  $R_{11}$  reduces this voltage to obtain the boosted  $B^+$  of 250 volts required for operation of the audio detector-amplifier (part of circuit 29-25).

## 29-28 LOW-VOLTAGE AND HEATER SUPPLY

For Black-and-White TV Receiver


### Circuit Description

This circuit includes the low-voltage (+150-volt) dc power supply and the series heater connections for circuits 29-24 through 29-27. As mentioned previously, the power supply and these four circuits comprise a complete black-and-white television receiver, with the exception of the picture tube and the vertical- and horizontal-deflection yokes.

The power supply is a half-wave

type which uses a 1N3194 silicon rectifier. The 117-volt ac input is connected to the power supply through an interlock,  $S_1$ , which may be mounted on the back cover of the receiver. AC input power is then automatically disconnected from the receiver when the back cover is removed. ON-OFF switch  $S_2$  controls the application of ac power to the power-supply circuit and to the tube heaters. With  $S_1$  and  $S_2$  both closed,

## 29-28 LOW-VOLTAGE AND HEATER SUPPLY (Cont'd)

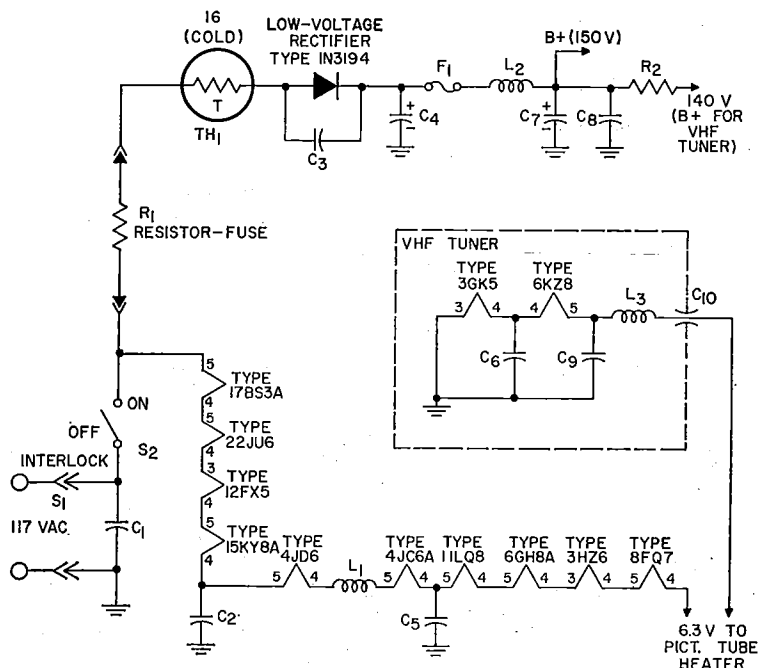

## Parts List

$C_1=0.22 \mu\text{F}$ , paper, 600 V  
 $C_2, C_5=0.001$ , ceramic, 500 V,  
 part of assembly with  $L_1$   
 $C_3=680 \text{ pF}$ , ceramic, 1000 V  
 $C_4=250 \mu\text{F}$ , electrolytic, 200 V  
 $C_6, C_8=680 \text{ pF}$ , ceramic,  
 500 V  
 $C_7=400 \mu\text{F}$ , electrolytic, 175 V  
 $C_8=0.001 \mu\text{F}$ , ceramic, 500 V  
 $C_{10}=1000 \text{ pF}$ , feedthrough,  
 5000 V

$F_1$ =Fuse, chemical, 0.45  
 ampere, RCA Stock No.  
 114446 or equiv.  
 $L_1$ =RF choke, part of heater  
 printed-circuit board, RCA  
 Stock No. 114499 or equiv-  
 alent (includes the two  
 0.001- $\mu\text{F}$  capacitors  $C_2$  and  
 $C_5$ )  
 $L_2$ =Filter choke (reactor),  
 RCA Stock No. 114501 or

equiv.  
 $L_3$ =RF choke for VHF tuner  
 filament circuit  
 $R_1$ =Resistor-fuse, 0.35 ohm,  
 RCA Stock No. 114481 or  
 equiv.  
 $R_2=330$  ohms, 1 watt  
 $TH_1$ =Surge protection res-  
 istor (thermistor), 16  
 ohms (cold), RCA Stock  
 No. 114480.

## Circuit Description (Cont'd)

the 117-volt power from the ac power line is applied to the series heater network and to the 1N3194 rectifier circuit. Two 0.001-microfarad ( $C_2$  and  $C_5$ ) and two 680-picofarad ( $C_6$  and  $C_8$ ) bypass capacitors and rf chokes  $L_1$  and  $L_3$  are included in the heater circuit to filter out any stray high-frequency signals that may be coupled from the rf and if signal channels.

The 117-volt ac input is converted to pulsating dc by the 1N3194 silicon rectifier. A capacitor-input, pi-type LC filter network filters the

rectifier output to obtain a smooth dc voltage that approaches the peak value of the input ac voltage. The 680-picofarad capacitor  $C_8$  in parallel with the 1N3194 rectifier and the thermistor  $TH_1$  in series with it provide surge-current protection for the rectifier. Initial surges of current that may result when power is first applied to the circuit (before a charge is developed across the input filter capacitor) are partially bypassed by the 680-picofarad capacitor and are limited in magnitude by the cold resistance of the thermistor. The

## 29-28 LOW-VOLTAGE AND HEATER SUPPLY (Cont'd)

### Circuit Description (Cont'd)

thermistor has a negative temperature coefficient of resistance, and by the time the charge of the input capacitor  $C_4$  builds up sufficiently to limit the current through the rectifier to a safe value, the resistance of the heated thermistor is small enough so that circuit power losses across this device are negligible. The resistor-fuse element  $R_1$  in series with

the 1N3194 rectifier provides protection against any continuous circuit overload. The +150-volt output from the power-supply filter network is used as the main B+ voltage for the television receiver. The 330-ohm, 1-watt dropping resistor  $R_2$  at the output of the filter network reduces this voltage to the +140 volts required as the B+ voltage in the vhf tuner.

## COLOR TELEVISION RECEIVER

Circuits 29-29 through 29-35 comprise a complete portable color television receiver. The brief signal-tracing analyses of these circuits assume that the reader has a basic knowledge of the purpose and operation of the various circuit sections of a color receiver. (The analyses can be more easily understood if the reader reviews the general discussions on television circuits given in the section on *Electron Tube Applications* starting on page 15). The receiver, which is essentially identical to the RCA Type CTC-22, features direct-line op-

eration; the chassis of circuits 29-29 through 29-35, therefore, are connected to one side of the ac line during operation. Servicing of these circuits should not be attempted by persons not familiar with the precautions necessary when working on this type of equipment. (See notes 1 and 2 on page 708.)

**Note:** Circuits 29-29 through 29-35 are included in this manual primarily to illustrate applications of RCA electron tubes. Because of the exceptionally high voltages (up to 21,500 volts), high frequencies, and large bandwidths that are required and of the many special components that are used, home construction of these circuits is not recommended.

## 29-29 LOW-VOLTAGE POWER SUPPLY, DEGAUSSING COIL, AND HEATER CONNECTIONS

For Color Television Receiver

### Circuit Description


This circuit includes the low-voltage (+280-volt) dc power supply, degaussing circuitry, and heater connections for a color television receiver. The tube heaters, with the exception of the color picture tube, are connected in series across the ac power line. Heater power for the picture tube is supplied by transformer  $T_1$ . With ON-OFF switch  $S_1$  closed, the 117-volt power from the ac power line is applied to the series heater string and to the primary of transformer  $T_1$ . The 117-volt ac input power is stepped down by transformer  $T_1$  to 6.3 volts at 1.0 ampere and applied to the heater of the 15LP22 color picture tube. Bypass

capacitors and rf chokes are included in the series heater string to filter out any stray high-frequency signals that may be coupled from the rf and if signal channels of the receiver.

Two silicon rectifiers  $CR_1$  and  $CR_2$  are used in a voltage-doubler circuit to convert the 117-volt ac input power to the +280-volt B+ supply voltage for the receiver. This doubler circuit also provides a 160-volt output from the junction of resistors  $R_1$  and  $R_5$ , a +140-volt output from the junction of resistor  $R_2$  and capacitor  $C_1$ , and a 95-volt output from the junction of resistor  $R_3$  and capacitor  $C_{15}$ . The dc voltage outputs



## 29-29 LOW-VOLTAGE POWER SUPPLY, DEGAUSSING COIL, AND HEATER CONNECTIONS (Cont'd)

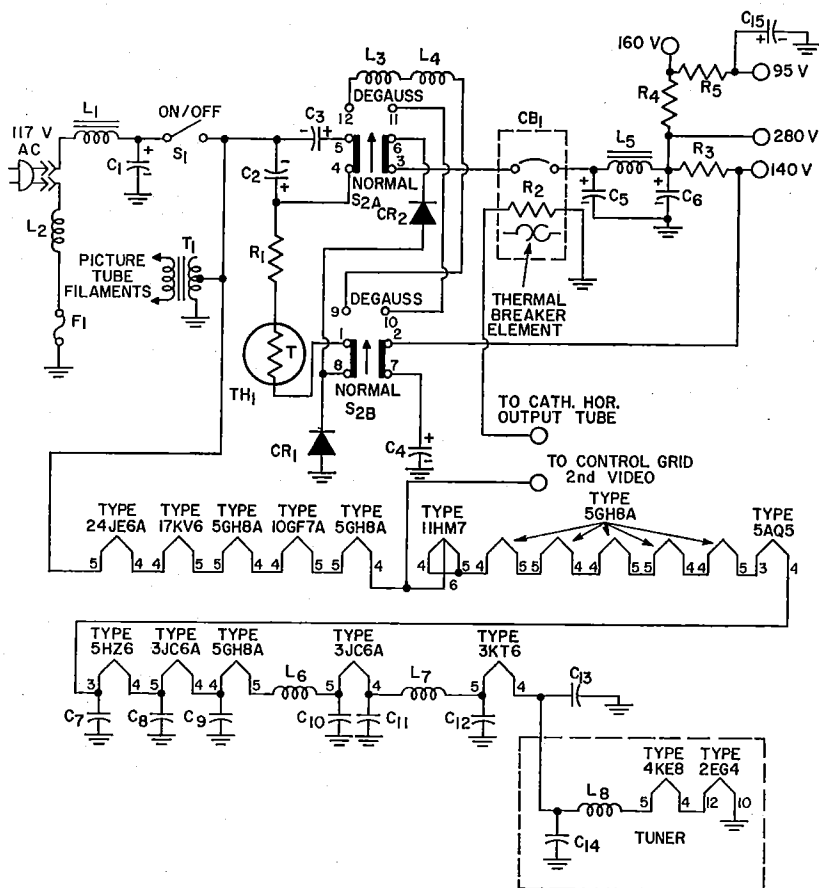

### Parts List

$C_1=0.047 \mu\text{F}$ , paper, 600 V  
 $C_2=250 \mu\text{F}$ , electrolytic, 175 V  
 $C_3=50 \mu\text{F}$ , electrolytic, 250 V  
 $C_4=100 \mu\text{F}$ , electrolytic, 300 V  
 $C_5=150 \mu\text{F}$ , electrolytic, 350 V  
 $C_6=100 \mu\text{F}$ , electrolytic, 350 V  
 $C_7$  through  $C_{14}=1000 \text{ pF}$ , ceramic, 500 V  
 $C_{15}=2 \mu\text{F}$ , electrolytic, 175 V  
 $CB_1$ =Circuit breaker (includes  $R_2$ ), RCA Stock No. 120784 or equiv.  
 $CR_1, CR_2$ =Silicon rectifiers, RCA Stock No. 113998 or

equiv.  
 $F_1$ =Fuse, 7-ampere, 250-volt  
 $L_1, L_2$ =Inductor, 60-Hz line filter  
 $L_3, L_4$ =Degaussing coils, RCA Stock No. 120793 or equiv.  
 $L_5$ =Filter choke, RCA Stock No. 120792 or equiv.  
 $L_6, L_7, L_8$ =RF choke  
 $R_1=2$  ohms, wirewound, 7 watts  
 $R_2=1.3$  ohms, part of  $CB_1$   
 $R_3=3900$  ohms, wirewound,

10 watts  
 $R_4=47000$  ohms, 1 watt  
 $R_5=10000$  ohms, 7 watts  
 $S_1$ =ON-OFF switch, single-pole, single-throw  
 $S_2$ =Degaussing switch, RCA Stock No. 120829 or equiv.  
 $T_1$ =Filament transformer; primary, 117-volt; secondary, 6.3-volt, 1-ampere  
 $TH_1$ =Thermistor; cold resistance, 120 ohms

See Note on page 722.

## 29-29 LOW-VOLTAGE POWER SUPPLY, DEGAUSSING COIL, AND HEATER CONNECTIONS (Cont'd)

### Circuit Description (Cont'd)

are filtered by the pi-section filter network formed by  $L_5$ ,  $C_6$ , and  $C_6$ .

The ac line is protected against any continuous circuit overload by a 7-ampere fuse,  $F_1$ , connected in series with one side of the line to ground. Surge protection is provided by a thermistor  $TH_1$  connected in series with the B+ rectifiers ( $CR_1$  and  $CR_2$ ). The B+ circuit is protected by a special thermal reset circuit breaker  $CB_1$ . The circuit breaker opens the B+ line whenever the current demand on the low voltage power supply or the current through the horizontal output stage becomes excessive.

The circuit breaker has a resistive winding (approximately 1.3 ohms) that completes the ground return for the horizontal output tube. If the cathode current of the output tube becomes excessive, the resistive winding heats and causes the bi-metal strip in the circuit breaker to expand unequally. The resultant flexing of the bi-metal strip disconnects the breaker switch contacts and thereby opens the B+ line. The same action occurs when the B+ current demand becomes excessive.

Degaussing of the color receiver is initiated by depression of the spring-loaded switch  $S_2$  to the DEGAUSS position. With  $S_2$  in the NORMAL position, capacitors  $C_2$  and  $C_3$  are combined in parallel to provide the charging capacitance for the

voltage-doubler circuit. For this condition, the parallel capacitors  $C_2$  and  $C_3$  are charged to approximately 142 volts and capacitor  $C_4$  is charged to 140 volts to provide the +280-volt B+ voltage. When  $S_2$  is depressed to the DEGAUSS position, capacitor  $C_2$  is disconnected from the circuit, and degaussing coils  $L_3$  and  $L_4$  are connected in series with the power-supply rectifiers and capacitor  $C_3$ . When the line voltage swings positive,  $C_3$  is charged through  $C_4$ , degaussing coils  $L_3$  and  $L_4$ , and  $CR_2$ ; when the line voltage is negative,  $C_3$  is charged through  $CR_1$  and the degaussing coils. This alternate cycling results in a symmetrical decaying wavetrain through the degaussing coils. The degaussing coils physically are looped about the receiver chassis in proximity to the color picture tube. The alternating magnetic fields developed by the decaying current wavetrain through these coils effectively demagnetizes the picture tube and adjacent chassis areas. The wavetrain decreases to zero when  $C_3$  is charged to twice the peak value of the line voltage (approximately 330 volts dc). The degaussing action is completed in less than 1 second. It is only necessary, therefore, to momentarily depress switch  $S_2$  to the DEGAUSS position. When the switch is released, it automatically returns to the NORMAL position.

## 29-30

### VHF TUNER


For Color Television Receiver

#### Circuit Description

This vhf tuner operates from a dc voltage of +280 volts obtained from the low-voltage power supply in the color television receiver. The tuner employs a 2EG4 nuvistor triode in the rf amplifier stage and uses a 4KE8 triode-pentode for the os-

cillator and mixer stages. The heaters of these tubes are connected in series with those of other tubes in the receiver; power for the series-heater string is obtained directly from the 117-volt ac power line. This tuner is very similar to

VHF TUNER (Cont'd)

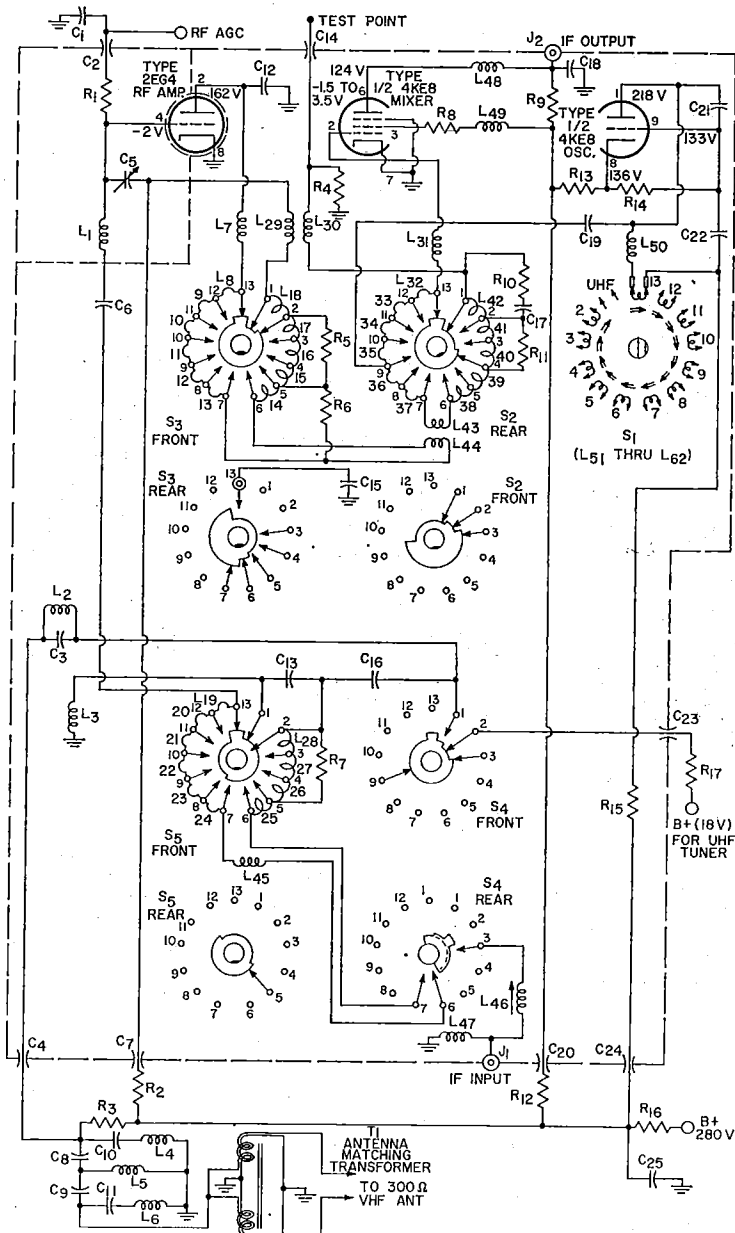

Note: Switches S1 through S5 are ganged together on the same shaft and are shown in channel 13 position.

## 29-30

## VHF TUNER (Cont'd)

## Parts List

$C_1=0.033 \mu\text{F}$ , paper, 200 V  
 $C_2, C_{20}, C_{23}, C_{24}=1000 \text{ pF}$ ,  
 feedthrough, 500 V  
 $C_3=47 \text{ pF} \pm 5\%$ , ceramic,  
 500 V, N750  
 $C_4=2 \text{ pF}$ , feedthrough, RCA  
 Stock No. 119595 or equiv.  
 $C_5=\text{Trimmer}$ , 2 to 10 pF,  
 RCA Stock No. 112038 or  
 equiv.  
 $C_6=27 \text{ pF} \pm 5\%$ , ceramic,  
 500 V, N750  
 $C_7=47 \text{ pF}$ , feedthrough,  
 500 V  
 $C_8, C_9, C_{10}, C_{11}=27 \text{ pF}$   
 $\pm 5\%$ , ceramic, 500 V, N470  
 $C_{12}=2.7 \text{ pF}$ , headed lead,  
 500 V  
 $C_{13}=33 \text{ pF}$ , ceramic, 500 V,  
 N750  
 $C_{14}=39 \text{ pF}$ , feedthrough,  
 500 V  
 $C_{15}=4.7 \text{ pF} \pm 5\%$ , headed  
 lead, 500 V  
 $C_{16}=680 \text{ pF}$ , ceramic, 500 V  
 $C_{17}=62 \text{ pF} \pm 5\%$ , ceramic,  
 1000 V, N1500  
 $C_{18}=27 \text{ pF}$ , ceramic, 500 V  
 $C_{19}=2 \text{ pF}$ , ceramic, 500 V,  
 NPO  
 $C_{21}=6.6 \text{ pF} \pm 5\%$ , ceramic,  
 500 V, N150  
 $C_{22}=27 \text{ pF}$ , ceramic, 500 V,  
 NPO  
 $C_{25}=0.047 \mu\text{F}$ , ceramic, 500 V  
 $L_1=\text{RF amplifier grid coil}$ ,  
 part of  $S_3$  assembly  
 $L_2=\text{UHF trap}$   
 $L_3=\text{RF amplifier grid-circuit}$   
 coil, part of  $S_5$  assembly  
 $L_4, L_5, L_6=\text{Filter coils for}$   
 high-pass filter network,  
 part of  $T_1$  assembly  
 $L_7=\text{RF amplifier plate coil}$ ,

part of  $S_3$  assembly  
 $L_8$  through  $L_{13}=\text{RF amplifier}$   
 plate-circuit tuning coils,  
 part of  $S_3$  assembly  
 $L_{14}$  through  $L_{28}=\text{Antenna}$   
 tuning coils, part of  $S_5$   
 assembly  
 $L_{29}, L_{30}=\text{High-band coupling}$   
 adjust coils  
 $L_{31}=\text{Mixer grid coil}$ , part of  
 $S_2$  assembly  
 $L_{32}$  through  $L_{42}=\text{Mixer}$   
 tuning coils, part of  $S_2$   
 assembly  
 $L_{43}, L_{44}=\text{Low-band coupling}$   
 adjust  
 $L_{45}=\text{RF amplifier grid-circuit}$   
 coil, part of  $S_5$  assembly  
 $L_{46}=\text{IF input coil for signals}$   
 from uhf tuner, RCA  
 Stock No. 120782 or equiv.  
 $L_{47}=\text{RF coil, part of input}$   
 circuit for signals from  
 uhf tuner  
 $L_{48}=\text{Mixer plate coil}$ , RCA  
 Stock No. 112909 or equiv.  
 $L_{49}=\text{RF filter coil}$   
 $L_{50}=\text{Channel 13 range-}$   
 centering coil  
 $L_{51}$  through  $L_{52}=\text{Local-}$   
 oscillator tuning coils, part  
 of  $S_1$  assembly  
 $J_1, J_2=\text{Single-contact female}$   
 connector, RCA Stock No.  
 104039 or equiv.  
 $R_1=47000 \text{ ohms}$ , 0.5 watt  
 $R_2=16000 \text{ ohms}$ , 3 watts  
 $R_3=4700 \text{ ohms}$ , 1 watt  
 $R_4=82000 \text{ ohms}$ , 0.5 watt  
 $R_5=15000 \text{ ohms}$ , 0.5 watt  
 $R_6=10000 \text{ ohms}$ , 0.5 watt  
 $R_7=2200 \text{ ohms}$ , 0.5 watt  
 $R_8, R_{10}=10 \text{ ohms}$ , 0.5 watt  
 $R_9, R_{13}=1000 \text{ ohms}$ , 0.5 watt

$R_{11}=27000 \text{ ohms}$ , 0.5 watt  
 $R_{12}=68000 \text{ ohms}$ , 1 watt  
 $R_{14}=6600 \text{ ohms}$ , 0.5 watt  
 $R_{15}=6800 \text{ ohms}$ , 0.5 watt  
 $R_{16}=680 \text{ ohms}$ , 1 watt  
 $S_1=\text{Local-oscillator section of}$   
 channel-selector switch ;  
 stator assembly, RCA  
 Stock No. 114837 or equiv.,  
 includes local-oscillator  
 tuning coils  $L_{51}$  through  
 $L_{52}$   
 $S_2=\text{Mixer section of channel-}$   
 selector switch ; stator  
 assembly, RCA Stock No.  
 120084 or equiv., includes  
 mixer tuning coils  $L_{31}$   
 through  $L_{42}$   
 $S_3=\text{RF amplifier section of}$   
 channel-selector switch ;  
 stator assembly, RCA  
 Stock No. 120086 or equiv.,  
 includes rf amplifier plate  
 tuning coils  $L_7$  through  $L_{13}$   
 $S_4=\text{UHF function switch}$   
 assembly ; part of channel-  
 selector switch ; stator  
 assembly, RCA Stock No.  
 114807 or equiv.  
 $S_5=\text{Antenna section of}$   
 channel-selector switch ;  
 stator assembly, RCA  
 Stock No. 120087 or equiv.,  
 includes antenna tuning  
 coils  $L_1, L_{45}$ , and  $L_{49}$   
 through  $L_{28}$   
 $T_1=\text{Antenna matching trans-}$   
 former (includes coils  $L_4$ ,  
 $L_5$ , and  $L_6$  in high-pass  
 filter network), RCA Stock  
 No. 113968

See Note on page 722.

## Circuit Description (Cont'd)

the tuner for a black-and-white television receiver (shown in circuit 29-24), and it operates equally well for either color or black-and-white transmissions.

The antenna used with the tuner is a balanced 300-ohm dipole type which is matched to the unbalanced tuner input circuit by the antenna matching transformer  $T_1$ . The ganged 5-section, 13-position channel selector,  $S_1$  through  $S_5$ , establishes the operating frequency of the tuner for each of the vhf channels 2 through 13 or adapts the vhf tuner for operation with a uhf tuner. When used with a uhf tuner, the vhf tuner is operated as a two stage broadband rf amplifier and becomes essentially a pre-if amplifier for the color television receiver.

With the channel selector set to any of the channel positions 2 through 13, telecast signals, either color or black-and-white, from the selected channel are coupled from the antenna circuit through sections  $S_4$  and  $S_5$  of the channel selector to the control grid of the 2EG4 rf amplifier. For channel positions 2 through 13, the input lead (IF INPUT) from the uhf tuner is not connected to the vhf tuner.

The vhf input signals are amplified by the rf amplifier. The  $S_4$  and  $S_5$  sections of the channel selector connect the appropriate combinations of inductors into the grid and plate circuits of the rf amplifier to tune this stage to the desired frequency channel. An agc bias voltage, derived from the keyed agc amplifier

29-30

## VHF TUNER (Cont'd)

## Circuit Description (Cont'd)

in another section of the color receiver (circuit 29-32), is applied to the control grid of the 2EG4 to control the gain of the rf amplifier automatically.

The output of the rf amplifier is coupled through sections  $S_2$  and  $S_3$  of the channel selector to the control grid of the 4KE8 pentode section used in the mixer stage. Section  $S_3$  of the ganged channel selector selects the proper combination of inductors to tune the mixer input circuit to the same operating frequency as that of the rf amplifier. A signal from the plate of the 4KE8 triode section used in the local-oscillator stage is also applied to the mixer. Section  $S_1$  of the channel selector selects the required inductance so that the oscillator operates at a frequency 45.75 MHz above the video carrier frequency of the vhf channel selected by the tuner.

The signals from the rf amplifier and local oscillator are heterodyned in the mixer stage to produce the 45.75-MHz amplitude-modulated and 41.25-MHz frequency-modulated difference frequencies used as picture and sound intermediate frequencies, respectively. The composite color signal received at the antenna also includes a 3.58-MHz color subcarrier sideband. This subcarrier is also

heterodyned with the local-oscillator frequency to produce a color-subcarrier intermediate frequency of 42.17 MHz. The picture, color-subcarrier, and sound if signals are coupled from the plate of the mixer through  $J_2$  to the if stages of the receiver.

When the multiple-section channel selector is rotated to the UHF position,  $S_6$  disconnects the vhf antenna circuit from the rf amplifier, and section  $S_1$  completes a connection to the 280-volt B+ line through several voltage-dropping resistors to provide a dc voltage output of 18 volts for use as the B+ voltage for a uhf tuner. The video, sound and color-subcarrier if signals from a uhf tuner can then be applied through the IF INPUT jack  $J_1$  and contacts of  $S_4$  and  $S_5$  to the control grid of the 2EG4 rf amplifier.

With the channel selector in the UHF position, switch section  $S_1$  opens the B+ line to the local oscillator to disable this stage. In addition, sections  $S_2$ ,  $S_3$ , and  $S_5$  select the proper combination of components so that the rf amplifier and mixer stages operate as broadband 44-MHz amplifiers to provide two stages of amplification of the picture and sound if signals ahead of the receiver main if strip.

29-31

## VIDEO-AND SOUND-CHANNEL CIRCUITS


For Color Television Receiver

These circuits form the video and sound channels for a color television receiver. The circuits operate from a dc supply voltage of 280 volts, obtained from the receiver low-voltage power supply. The tube heaters are included in the series-heater string for the over-all receiver. Operating power for the series-heater string is obtained directly from the 117-volt ac power line.

The picture if-amplifier circuit

consists of two high-gain stages that use high-transconductance frame-grid tubes and double-tuned interstage coupling transformers. The composite if input from the vhf tuner which consists of amplitude-modulated 45.75-MHz picture signals 42.17-MHz color-subcarrier components, and frequency-modulated 41.25-MHz sound signals, are coupled by capacitor  $C_{21}$  and transformer  $T_6$  to the control grid of the 3KT6 pentode used in the first picture if

## 29-31 VIDEO- AND SOUND-CHANNEL CIRCUITS (Cont'd)

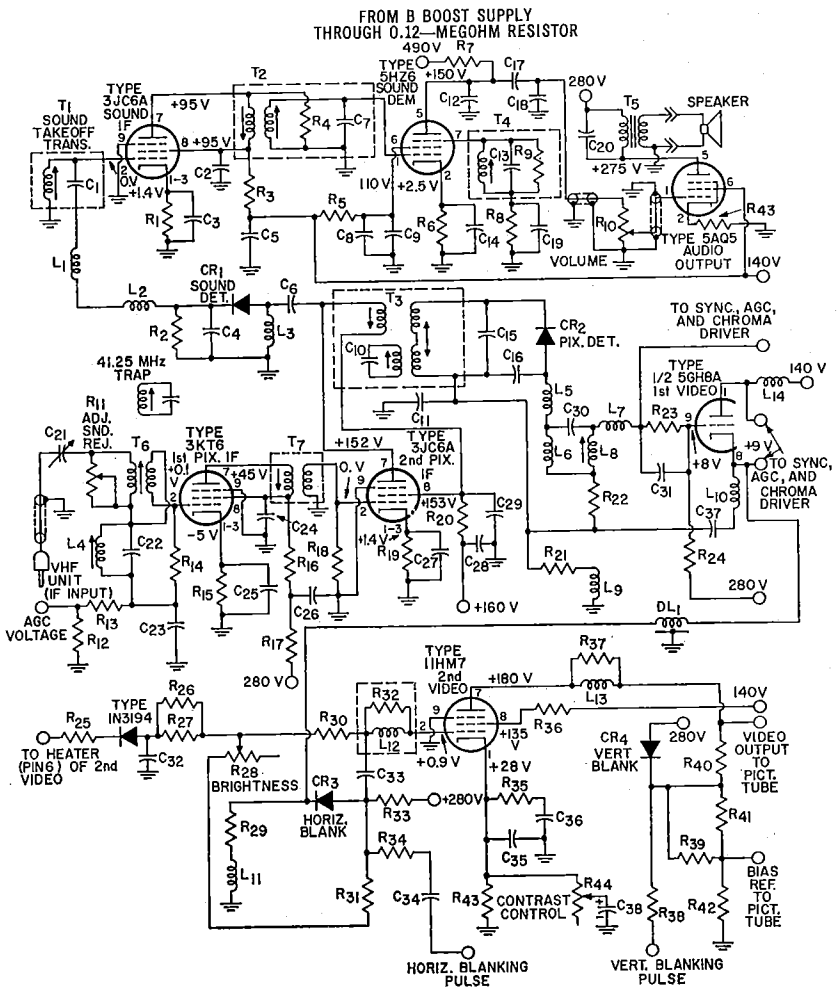

## Parts List

C<sub>1</sub>=5 pF, part of T<sub>1</sub>  
 C<sub>2</sub>=1000 pF ±5%, ceramic,  
 500 V  
 C<sub>3</sub>, C<sub>6</sub>, C<sub>9</sub>, C<sub>14</sub>=0.01 μF,  
 ceramic, 500 V  
 C<sub>4</sub>=10 pF ±5%, ceramic,  
 500 V, NPO  
 C<sub>5</sub>=1.5 pF, ceramic, 500 V,  
 NPO  
 C<sub>7</sub>=6 pF, part of T<sub>2</sub>  
 C<sub>8</sub>=47 pF, ceramic, 500 V,  
 N750

C<sub>10</sub>=150 pF, part of T<sub>3</sub>  
 C<sub>11</sub>=39 pF, ceramic, 500 V,  
 N750  
 C<sub>12</sub>=560 pF, ceramic, 500 V  
 C<sub>13</sub>=10 pF, part of T<sub>4</sub>  
 C<sub>16</sub>=4 pF, ceramic, 500 V  
 C<sub>18</sub>=10 pF, ceramic, 500 V,  
 NPO  
 C<sub>17</sub>=6800 pF, ceramic, 500 V  
 C<sub>19</sub>=47 pF, ceramic, 500 V,  
 N750  
 C<sub>20</sub>=0.047 pF, ceramic, 500 V

C<sub>20</sub>=0.0033 μF, paper, 1600 V  
 C<sub>21</sub>=Trimmer, 3 to 15 pF,  
 RCA Stock No. 116502 or  
 equiv.  
 C<sub>22</sub>=150 pF ±5%, mica,  
 500 V  
 C<sub>23</sub>, C<sub>26</sub>, C<sub>28</sub>, C<sub>35</sub>=1000 pF,  
 ceramic, 500 V  
 C<sub>24</sub>=330 pF, mica, 500 V  
 C<sub>25</sub>=24 pF, ceramic, 500 V,  
 NPO

## 29-31 VIDEO- AND SOUND-CHANNEL CIRCUITS (Cont'd)

## Parts List (Cont'd)

- C<sub>27</sub>=4700 pF, ceramic, 500 V  
 C<sub>28</sub>=430 pF  $\pm 5\%$ , mica, 500 V  
 C<sub>30</sub>=150 pF, mica, 500 V  
 C<sub>31</sub>=0.047  $\mu$ F, Mylar, 100 V  
 C<sub>32</sub>=0.047  $\mu$ F, ceramic, 100 V  
 C<sub>33</sub>=0.1  $\mu$ F, Mylar, 100 V  
 C<sub>34</sub>=560 pF, ceramic, 500 V  
 C<sub>36</sub>=680 pF, ceramic, 500 V  
 C<sub>37</sub>=220 pF, ceramic, 500 V  
 C<sub>38</sub>=50  $\mu$ F, electrolytic, 50 V  
 CR<sub>1</sub>, CR<sub>2</sub>, CR<sub>3</sub>=1N60 diode  
 CR<sub>4</sub>=Vertical-blanking diode, RCA Stock No. 115867 or equiv.  
 DL<sub>1</sub>=Delay line, RCA Stock No. 120786 or equiv.  
 L<sub>1</sub>=RF choke, 3.9  $\mu$ H, RCA Stock No. 116507 or equiv.  
 L<sub>2</sub>, L<sub>10</sub>=RF choke, 1.8  $\mu$ H, RCA Stock No. 109248 or equiv.  
 L<sub>3</sub>=RF choke, 12  $\mu$ H, RCA Stock No. 120831  
 L<sub>4</sub>=Inductor for 47.25-MHz trap, RCA Stock No. 121447 or equiv.  
 L<sub>5</sub>=Video-detector filter coil, 5.6  $\mu$ H, RCA Stock No. 109171 or equiv.  
 L<sub>6</sub>, L<sub>8</sub>=Part of 4.5-MHz trap, RCA Stock No. 121446 or equiv.  
 L<sub>7</sub>=Video-detector filter coil, 36  $\mu$ H, RCA Stock No. 16056 or equiv.  
 L<sub>9</sub>=RF choke, 100  $\mu$ H, RCA Stock No. 117380 or equiv.  
 L<sub>11</sub>=Filter coil, 27  $\mu$ H, RCA Stock No. 116511 or equiv.  
 L<sub>12</sub>=Filter network (includes resistor R<sub>32</sub>); RCA Stock No. 116499 or equiv.  
 L<sub>13</sub>=Second-video plate coil, 330  $\mu$ H, RCA Stock No. 118710 or equiv.  
 L<sub>14</sub>=First-video plate coil, 1.8  $\mu$ H, RCA Stock No. 78466 or equiv.  
 R<sub>1</sub>, R<sub>6</sub>, R<sub>35</sub>, R<sub>33</sub>=270 ohms, 0.5 watt  
 R<sub>2</sub>, R<sub>25</sub>=10000 ohms, 0.5 watt  
 R<sub>3</sub>=8200 ohms, 0.5 watt  
 R<sub>4</sub>=0.15 megohm, may be part of T<sub>2</sub>  
 R<sub>5</sub>=3300 ohms, 0.5 watt  
 R<sub>7</sub>=0.68 megohm, 0.5 watt  
 R<sub>8</sub>=0.47 megohm, 0.5 watt  
 R<sub>9</sub>=68000 ohms, may be part of T<sub>4</sub>  
 R<sub>10</sub>=Potentiometer, volume control, 1 megohm, 0.5 watt  
 R<sub>11</sub>=Potentiometer, sound-rejection adjustment, 7500 ohms, 0.5 watt  
 R<sub>12</sub>=0.33 megohm, 0.5 watt  
 R<sub>13</sub>, R<sub>30</sub>=0.1 megohm, 0.5 watt  
 R<sub>14</sub>=3900 ohms,  $\pm 5\%$ , 0.5 watt  
 R<sub>15</sub>=56 ohms,  $\pm 5\%$ , 0.5 watt  
 R<sub>16</sub>=1000 ohms, 0.5 watt  
 R<sub>17</sub>=22000 ohms, 4 watts  
 R<sub>18</sub>=6800 ohms,  $\pm 5\%$ , 0.5 watt  
 R<sub>19</sub>=150 ohms,  $\pm 5\%$ , 0.5 watt  
 R<sub>20</sub>=470 ohms, 0.5 watt  
 R<sub>21</sub>=1200 ohms, 0.5 watt  
 R<sub>22</sub>=4700 ohms, 0.5 watt  
 R<sub>23</sub>=0.18 megohm, 0.5 watt  
 R<sub>24</sub>=6.6 megohms, 0.5 watt  
 R<sub>26</sub>=22 megohms, 0.5 watt  
 R<sub>27</sub>=2.7 megohms, 0.5 watt  
 R<sub>28</sub>=Potentiometer, brightness control, 0.25 megohm, RCA Stock No. 120775 or equiv.  
 R<sub>29</sub>=680 ohms  $\pm 5\%$ , 0.5 watt  
 R<sub>31</sub>=0.22 megohm, 0.5 watt  
 R<sub>32</sub>=2200 ohms, part of assembly with L<sub>12</sub>  
 R<sub>33</sub>=0.39 megohm, 0.5 watt  
 R<sub>34</sub>=0.12 megohm, 0.5 watt  
 R<sub>36</sub>=100 ohms, 0.5 watt  
 R<sub>37</sub>=5600 ohms, 0.5 watt  
 R<sub>38</sub>=560 ohms, 0.5 watt  
 R<sub>39</sub>=22000 ohms, 3 watts  
 R<sub>40</sub>=6800 ohms, 4 watts  
 R<sub>41</sub>=10000 ohms, 3 watts  
 R<sub>42</sub>=33000 ohms, 4 watts  
 T<sub>1</sub>=Sound-takeoff transformer (includes C<sub>1</sub>), RCA Stock No. 120824 or equiv.  
 T<sub>2</sub>=4.5-MHz sound if transformer (includes C<sub>7</sub> and may include R<sub>4</sub>), RCA Stock No. 120823 or equiv.  
 T<sub>3</sub>=Pix if output transformer and 41.25-MHz trap, RCA Stock No. 120827 or equiv.  
 T<sub>4</sub>=Sound-demodulator quadrature network (includes C<sub>13</sub> and may include R<sub>9</sub>), RCA Stock No. 120825 or equiv.  
 T<sub>5</sub>=Audio output transformer, matches 5000-ohm tube-plate impedance to 3.2-ohm speaker voice coil, RCA Stock No. 120822 or equiv.  
 T<sub>6</sub>=IF input transformer and 41.25-MHz trap, RCA Stock No. 116560 or equiv.  
 T<sub>7</sub>=Pix if transformer, RCA Stock No. 120826 or equiv.  
 See Note on page 722.

## Circuit Description (Cont'd)

amplifier. The 3KT6 tube has good remote-cutoff characteristics, and the automatic-gain-control (agc) bias voltage from the receiver agc amplifier (shown in circuit 29-32) is also applied to the control-grid circuit of this tube. The output of the first picture if amplifier is coupled by transformer T<sub>7</sub> to the control grid of the 3JC6A pentode used in the second picture if amplifier. Capacitor C<sub>6</sub> couples the output of the second picture if amplifier to the sound detector, and transformer T<sub>3</sub> couples the output to the video (pix) detector. Transformers T<sub>6</sub>, T<sub>7</sub>, and T<sub>3</sub> are stagger-tuned to obtain the wide band pass required for the if amplifiers to pass both the 45.75-MHz video AM signals and the 41.25-MHz

sound FM signals, as well as the intermediate 42.17 color subcarrier.

The sound detector (CR<sub>1</sub> and associated components) is essentially a second mixer circuit. The 45.75-MHz picture if signal and the 41.25-MHz sound if signal are heterodyned to produce a second sound if carrier of 4.5 MHz. This 4.5-MHz sound if carrier is still frequency-modulated by the audio components contained in the original rf signal input at the receiver antenna. The sound-takeoff transformer T<sub>1</sub> forms a selective load impedance for the 4.5-MHz if signal derived in the sound detector circuit.

The 4.5 MHz signal developed across sound-takeoff transformer T<sub>1</sub> is applied to the control grid of the 3JC6A sound if amplifier. The ampli-

## 29-31 VIDEO- AND SOUND-CHANNEL CIRCUITS (Cont'd)

### Circuit Description (Cont'd)

fied 4.5 MHz FM if signal from this stage is then coupled by the double-tuned transformer  $T_2$  to the control grid of the 5HZ6 sound demodulator. This stage demodulates the 4.5-MHz sound if signal and amplifies the resultant audio signal voltage. The +490 volts used as the plate supply for the 5HZ6 demodulator tube is derived from the 700-volt B Boost supply in the horizontal-output stage (shown in circuit 29-33) of the receiver.

The tuned secondary circuit of transformer  $T_3$  selects the 45.75-MHz amplitude-modulated picture and 42.17-MHz color sideband signals from the composite if signal and applies this picture signal to the video detector ( $CR_2$  and associated components). The detected video signal developed across the detector-circuit filter network ( $L_5$ ,  $L_6$ ,  $L_7$ ,  $L_8$ , and  $C_{30}$ ) is then coupled through  $C_{31}$  and  $R_{23}$  to the control grid of the 5GH8A triode section used in the first video amplifier (the pentode section of the 5GH8A tube is used in the sync-age-and-chroma driver, shown in circuit 29-32). The first video amplifier supplies the input signals to the sync-age-and-chroma driver and to the second video amplifier.

The second video stage performs many functions. The input circuit of the 11HM7 pentode used in this stage is the insertion point for horizontal blanking pulses (for eventual application to the cathodes of the color picture tube). The horizontal blanking diode  $CR_3$  is placed in the conducting mode by a small positive voltage applied to its anode through the dropping resistor  $R_{33}$  from the 280-volt B+ source. During active video scanning time, diode  $CR_3$  is forward-biased (conducting), and the video signal is coupled by capacitor  $C_{33}$  to the control grid of the video amplifier. During horizontal blanking time, a negative pulse from the horizontal-output transformer

( $T_1$  in circuit 29-33) is applied through  $C_{34}$  and  $R_{34}$  to the diode. This negative pulse is sufficient to cut off the diode during horizontal retrace time. The pulse is applied to the control grid of the second video amplifier and drives the grid more negative (than would the normal horizontal sync pulse). The negative signal at the grid is inverted at the plate; the added positive level coupled to the cathodes of the color picture tube is sufficient to provide blanking of horizontal retrace lines.

The brightness control for the color receiver is also located in the control-grid circuit of the second video amplifier. Negative dc grid bias for the 11HM7 second video tube is derived from the ac voltage obtained from the heater, pin 6, of the second video tube. The 11HM7 heater is in the approximate center of the series heater string (refer to circuit 29-29); at this point, approximately 60 volts of ac voltage is available. The negative dc voltage (about -75 volts) is developed across  $C_{32}$  by the IN3194 rectifier circuit. Adjustment of the brightness control,  $R_{28}$  alters the grid bias by "tapping" the positive voltage applied to the top of the control. This unique circuit arrangement provides automatic brightness compensation with changes in power-line voltage. If line voltage increases, the negative voltage across  $C_{32}$  increases; the increased bias that is then applied to the 11HM7 decreases the conduction of this tube. The opposite action occurs with a decrease in line voltage.

The cathode of the second video amplifier is returned to the contrast control  $R_{11}$ . Brightness stability is obtained by use of a fixed 150-ohm, 5-per cent resistor,  $R_{13}$ , for dc cathode bias. Adjustment of the contrast control does not change the dc characteristics of the cathode; only the ac signal gain of the stage is altered when the control is adjusted.




## 29-31 VIDEO- AND SOUND-CHANNEL CIRCUITS (Cont'd)

## Circuit Description (Cont'd)

Vertical-retrace blanking is accomplished in the plate circuit of the second video amplifier. During active scan periods, the vertical-blanking diode CR<sub>4</sub> is forward-biased (conducts); during vertical retrace periods, however, a positive (blanking) pulse from the vertical-output transformer (T<sub>2</sub> in circuit 29-33) is applied through R<sub>33</sub> to the cathode of the diode. This 60-volt positive

pulse is large enough to bias the diode into cutoff. During the blanking interval, the positive voltage pulse is added to the plate voltage of the 11HM7 second-video tube and applied to the cathode circuits of the color picture tube. As a result of the increased positive potential at the cathode, the picture tube is cut off during vertical retrace periods.

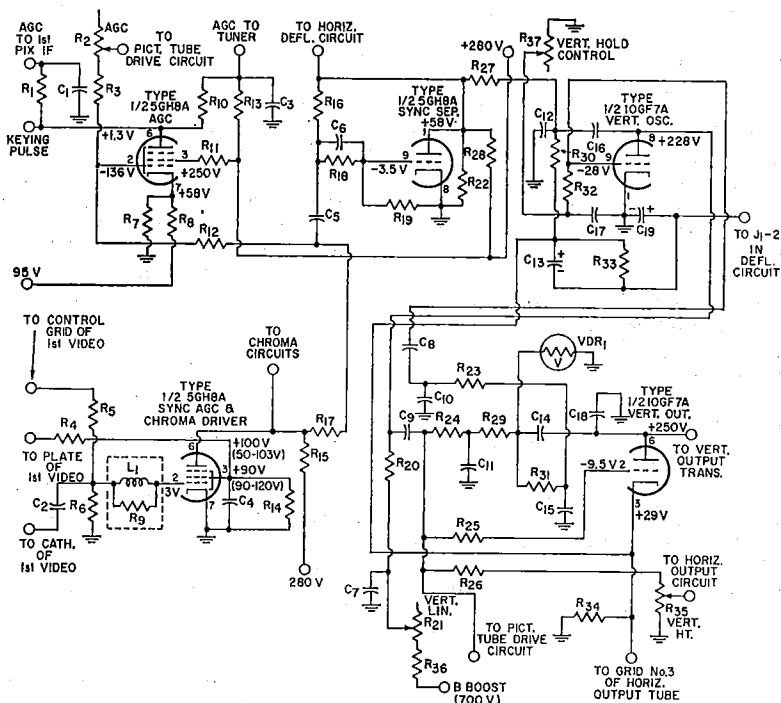29-32 SYNC, AGC, AND VERTICAL-DEFLECTION CIRCUITS  
For Color Television Receiver

## Parts List

C<sub>1</sub>=0.18  $\mu$ F, Mylar, 200 V  
C<sub>2</sub>=24 pF, ceramic, 500 V,  
NPO

C<sub>3</sub>, C<sub>17</sub>=0.01  $\mu$ F, ceramic,  
500 V

C<sub>4</sub>=1000 pF, ceramic, 500 V

C<sub>5</sub>=3300 pF, ceramic, 500 V

C<sub>6</sub>=470 pF, ceramic, 500 V

C<sub>7</sub>=0.1  $\mu$ F, paper, 600 V

C<sub>8</sub>=0.0056  $\mu$ F, Mylar,  
400 V

C<sub>9</sub>=0.01  $\mu$ F, Mylar, 600 V

C<sub>10</sub>, C<sub>15</sub>=680 pF, ceramic,  
500 V

C<sub>11</sub>=0.047  $\mu$ F, Mylar, 100 V

C<sub>12</sub>=1500 pF, ceramic, 500 V

C<sub>13</sub>=60  $\mu$ F, electrolytic,  
75 V

C<sub>14</sub>=0.0082  $\mu$ F, paper,  
1000 V

C<sub>16</sub>=0.033  $\mu$ F, Mylar, 600 V

C<sub>18</sub>=0.001  $\mu$ F, ceramic,  
3000 V

C<sub>19</sub>=25  $\mu$ F, electrolytic, 25 V

L<sub>1</sub>=RF choke, 120  $\mu$ H, part  
of assembly with R<sub>9</sub>, RCA  
Stock No. 120795 or equiv.

29-32

## SYNC, AGC, AND VERTICAL-DEFLECTION CIRCUITS (Cont'd)

### Parts List (Cont'd)

$R_1, R_{18}=0.15$  megohm,  
0.5 watt  
 $R_2$ =Potentiometer, age  
adjustment, 60000 ohms,  
0.5 watt, RCA Stock No.  
120804 or equiv.  
 $R_3=27000$  ohms, 0.5 watt  
 $R_4=8300$  ohms, 0.5 watt  
 $R_5, R_{17}, R_{28}=10000$  ohms,  
0.5 watt  
 $R_6=6800$  ohms, 0.5 watt  
 $R_7=27000$  ohms, 1 watt  
 $R_8=1500$  ohms, 0.5 watt  
 $R_9=68000$  ohms, 0.5 watt,  
part of assembly with  $L_1$   
 $R_{10}=0.56$  ohms, 0.5 watt  
 $R_{11}=1800$  ohms, 0.5 watt  
 $R_{12}, R_{27}, R_{31}=0.12$  megohm,

0.5 watt  
 $R_{13}=10$  megohms, 0.5 watt  
 $R_{14}=22000$  ohms, 0.5 watt  
 $R_{15}=10000$  ohms, 3 watts  
 $R_{16}=22$  megohms, 0.5 watt  
 $R_{19}=3.3$  megohms, 0.5 watt  
 $R_{20}=1.5$  megohms, 0.5 watt  
 $R_{21}$ =Potentiometer, vertical-  
linearity control, 3.4 meg-  
ohms, 0.5 watt, RCA  
Stock No. 120807 or equiv.  
 $R_{22}=56000$  ohms, 0.5 watt  
 $R_{23}=47000$  ohms, 0.5 watt  
 $R_{24}=4.7$  megohms, 0.5 watt  
 $R_{25}=1000$  ohms, 0.5 watt  
 $R_{26}=1.5$  megohms, 0.5 watt  
 $R_{29}=0.47$  megohm, 0.5 watt  
 $R_{30}=33000$  ohms  $\pm 5\%$ ,

0.5 watt  
 $R_{32}=0.22$  megohm, 0.5 watt  
 $R_{33}=3300$  ohms, 1 watt  
 $R_{34}=1500$  ohms, wirewound,  
3 watts  
 $R_{35}$ =Potentiometer, vertical-  
height control, 1 megohm,  
0.5 watt, RCA Stock No.  
120805 or equiv.  
 $R_{36}=0.1$  megohm, 1 watt  
 $R_{37}$ =Potentiometer, vertical-  
hold control, 0.75 meg-  
ohm, 0.5 watt  
 $VDR_1$ =Voltage-dependent  
resistor (varistor); 870  
volts at 1 mA; RCA  
Stock No. 112876 or equiv.  
 See Note on page 722.

### Circuit Description

This circuit shows the sync-agc-and-chroma driver, age amplifier, sync separator, and vertical deflection circuit for a color television receiver. The sync-agc-and-chroma driver, the sync separator, and the vertical output tube operate from a plate supply (B+) voltage of 280-volts obtained from the receiver low-voltage power supply. The plate supply voltage for the age amplifier is a positive keying pulse from the horizontal-output transformer, and the plate voltage for the vertical oscillator is obtained from the 700-volt B Boost supply in the horizontal output circuit. The tube heaters are connected into the series-heater string for the over-all color receiver; operating power for the heater string is obtained directly from the ac power line.

The drive signal for the sync and agc circuits is obtained from the cathode of the first video amplifier (shown in circuit 29-31). This signal is coupled by capacitor  $C_2$  and the parallel LR network  $L_2$  and  $R_6$  to the control grid of the 5GH8A pentode section used in the sync-agc-and-chroma driver. (The triode section of the 5GH8A tube is used in the first video amplifier). The screen-grid and control-grid bias voltages for the driver pentode are also obtained from the first video amplifier. The output of the driver stage is applied to the control grids of the age

amplifier and the sync separator and to the chroma circuits (shown in circuit 29-34).

The age amplifier uses the pentode section of a 5GH8A triode-pentode; the triode section of this tube is used in the sync separator. The operation of the age amplifier is gated by a positive keying pulse from the horizontal-output transformer (shown in circuit 29-33). This pulse, which is synchronized with the video signal, overcomes the bias provided by the 95 volts (obtained from the receiver low-voltage power supply, circuit 29-29) applied to the cathode circuit of the age amplifier. Portions of the video signal that occur coincident with the keying pulse (i.e. during the horizontal blanking interval) are amplified by the age stage. Resistor  $R_1$  and capacitor  $C_1$ , together with other filtering elements in the control-grid circuit of the first picture if amplifier, filter out the pulsating components in the video signal to obtain a negative dc voltage proportional the video signal and thus to the rf input at the receiver antenna. Similarly, an age bias voltage for the vhf tuner is developed across the filter capacitor  $C_3$ .

Synchronizing pulses are included in the composite rf signals transmitted by a television broadcast station to provide timing information required for synchronization of the transmitter and receiver scan-

## 29-32 SYNC, AGC, AND VERTICAL-DEFLECTION CIRCUITS (Cont'd)

### Circuit Description (Cont'd)

ning systems. The sync separator separates and amplifies the synchronizing pulses contained in the composite video signal it receives from the sync-age-and-chroma driver. The 5GH8A triode section used in this stage is operated basically as a class C limiter. When the video signal is applied, the stage is biased beyond cutoff by the negative voltage developed by the grid-leak bias network formed by  $C_0$  and  $R_{18}$ . Only the sync pulses in the composite video signal have sufficient amplitude to drive the sync amplifier into conduction. The resultant negative pulses developed in the plate circuit of the 5GH8A triode section are applied as the synchronizing inputs to the vertical and horizontal deflection circuits.

The vertical-deflection circuit employs one section of a 10GF7A dual triode in a vertical oscillator stage and a vertical output stage. These two stages form a basic plate-coupled 60-Hz free-running multivibrator that is synchronized by negative vertical sync pulses from the sync separator stage. The negative-pulse output from the sync separator, however, includes horizontal sync pulses and equalizing pulses in addition to the vertical sync pulses. The vertical sync pulses must be

separated from the composite sync-separator output prior to the application of the synchronizing input to the vertical-deflection circuits. This separation is accomplished by integration of the composite sync-separator output across capacitor  $C_{12}$ . The integrating network ( $R_{27}$  and  $C_{12}$ ) has negligible response for the narrow horizontal-sync and equalizing pulses, but responds to the greater energy contained in the much wider vertical-sync pulses to develop a triangular voltage waveform, coupled by  $C_{10}$ ,  $C_0$ , and  $R_{25}$  to the control grid of the vertical-output triode section, that synchronizes the operation of the multivibrator. The combination of the triangular wave input to the grid of the output section and the square-wave multivibrator signal results in a trapezoidal voltage waveform at the plate of the output section. This trapezoidal voltage wave produces a triangular wave of current through the vertical-output transformer ( $T_2$  in circuit 29-33) and through the vertical deflection coils of the picture tube (shown in circuit 29-35). The rising portion of the triangular current waveform produces the vertical scanning, and the decreasing portion of the waveform provides the retrace.

## 29-33 HORIZONTAL-DEFLECTION CIRCUIT AND HIGH VOLTAGE POWER SUPPLY

For Color Television Receiver


### Circuit Description

These circuits develop the horizontal scanning signals and the dc operating voltage (21,500 volts) for the color picture tube (RCA Type 15LP22) and the receiver B Boost voltage (700 volts). The circuits operate from the receiver low-voltage (280-volt) supply. The heaters of the 5GH8A, 24JE6A, and 17KV6A tubes used in these circuits are included in the series-heater string for the

over-all receiver; operating power for these heaters is obtained directly from the 117-volt ac power line. Heater power for the 3A3A high-voltage rectifier tube is obtained from a 3-volt secondary winding on the high-voltage transformer.

A blocking oscillator in which the transformer coil is located in the cathode circuit is used to obtain a large-amplitude horizontal-drive

## HORIZONTAL-DEFLECTION CIRCUIT AND HIGH-VOLTAGE POWER SUPPLY (Cont'd)

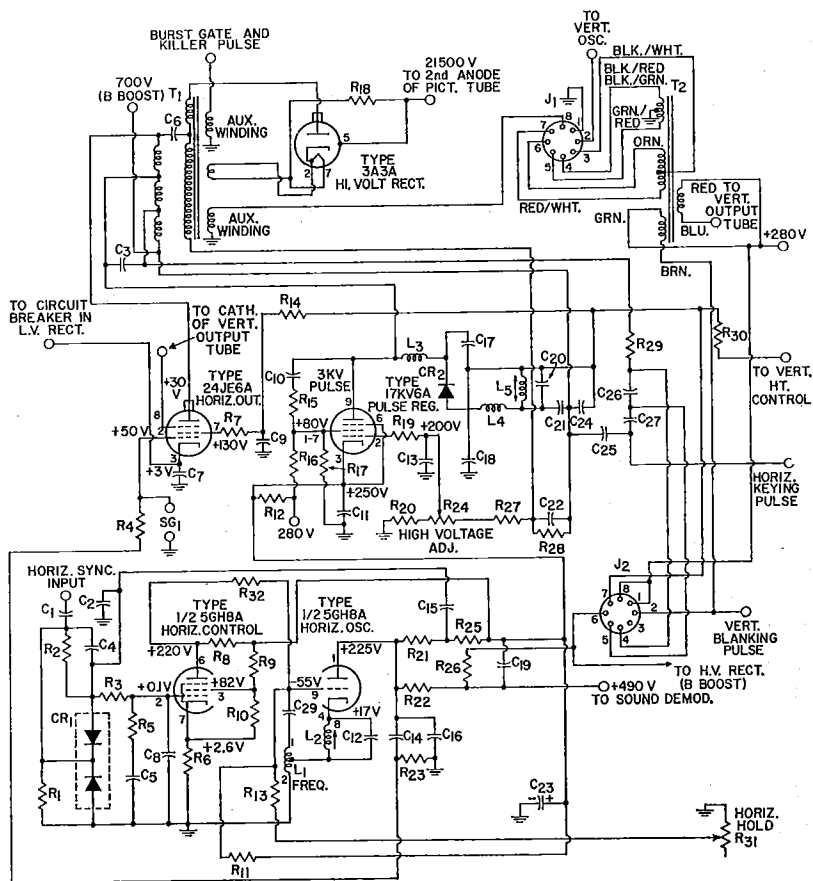

### Parts List

- C<sub>1</sub>=82 pF ±1 pF, ceramic, 500 V, NPO  
 C<sub>2</sub>=1200 pF, ceramic, 500 V  
 C<sub>3</sub>=0.0018 μF, paper, 1000 V  
 C<sub>4</sub>=150 pF, ceramic, 500 V, NPO  
 C<sub>5</sub>=0.15 μF, Mylar, 75 V  
 C<sub>6</sub>=0.01 μF, Mylar, 600 V  
 C<sub>7</sub>=0.01 μF, Mylar, 75 V  
 C<sub>8</sub>, C<sub>15</sub>=1200 pF, ceramic, 500 V  
 C<sub>9</sub>, C<sub>19</sub>=0.1 μF, Mylar, 400 V  
 C<sub>10</sub>=15 pF, ceramic, 5000 V, N750  
 C<sub>11</sub>, C<sub>13</sub>=1000 pF, ceramic, 500 V  
 C<sub>12</sub>, C<sub>14</sub>=0.01 μF, Mylar, 400 V  
 C<sub>16</sub>=270 pF ±5%, mica, 500 V  
 C<sub>17</sub>=100 pF, ceramic, 5000 V, N1500  
 C<sub>18</sub>=22 pF, ceramic, 1000 V, N750  
 C<sub>20</sub>=0.1, Mylar, 200 V  
 C<sub>21</sub>=0.033 μF, Mylar, 600 V  
 C<sub>22</sub>=0.01 μF, Mylar, 600 V  
 C<sub>23</sub>=40 μF, electrolytic, 350 V  
 C<sub>24</sub>=0.047 μF, Mylar, 600 V  
 C<sub>25</sub>=150 pF, ceramic, 2000 V, N1500  
 C<sub>26</sub>=270 pF, ceramic, 2500 V, N1500  
 C<sub>27</sub>=150 pF, ceramic, 2000 V, N1500  
 CR<sub>1</sub>=AFC diodes, RCA Stock No. 109474 or equiv.  
 CR<sub>2</sub>=Damper diode, RCA Stock No. 120818 or equiv.  
 J<sub>1</sub>=Octal socket, conver-  
 gence-circuit input jack,

- RCA Stock No. 77645 or equiv. (mates with P<sub>1</sub> on circuit 26-36)  
 J<sub>2</sub>=Octal socket, deflection-yoke input jack, RCA Stock No. 102787 or equiv. (mates with P<sub>2</sub> on circuit 26-36)  
 L<sub>1</sub>, L<sub>2</sub>=Horizontal-oscillator dual-coil assembly, RCA Stock No. 109947 or equiv.  
 L<sub>3</sub>, L<sub>4</sub>=RF choke, 4.7 μH, RCA Stock No. 120839 or equiv.  
 L<sub>5</sub>=Variable inductor, horizontal efficiency adjustment, RCA Stock No. 120794 or equiv.  
 R<sub>1</sub>, R<sub>2</sub>=0.22 megohm, 0.5 watt  
 R<sub>2</sub>, R<sub>20</sub>=0.39 megohm, 0.5 watt

29-33

## HORIZONTAL-DEFLECTION CIRCUIT AND HIGH-VOLTAGE POWER SUPPLY (Cont'd)

### Parts List (Cont'd)

$R_3=0.27$  megohm, 0.5 watt  
 $R_4=100$  ohms, 0.5 watt  
 $R_5=15000$  ohms, 0.5 watt  
 $R_6=1200$  ohms, 0.5 watt  
 $R_7=47$  ohms, 0.5 watt  
 $R_8, R_{20}=0.12$  megohm, 0.5 watt  
 $R_9=0.15$  megohm, 0.5 watt  
 $R_{10}=82000$  ohms, 0.5 watt  
 $R_{11}=8.2$  megohms, 0.5 watt  
 $R_{12}=680$  ohms, 2 watts  
 $R_{13}=82000$  ohms  $\pm 2\%$ , 0.5 watt  
 $R_{14}=82000$  ohms  $\pm 5\%$ , 4 watts

$R_{15}=100$  ohms, 0.5 watt  
 $R_{16}=68000$  ohms, 1 watt  
 $R_{17}=33000$  ohms, 0.5 watt  
 $R_{18}=1000$  ohms, 2 watts  
 $R_{19}=10000$  ohms, 0.5 watt  
 $R_{21}=27000$  ohms, 0.5 watt  
 $R_{22}=10$  megohms, 0.5 watt  
 $R_{23}$ =Potentiometer, high-voltage adjustment, 0.5 megohm, 0.5 watt  
 $R_{24}=33000$  ohms, 0.5 watt  
 $R_{27}=0.56$  megohm, 0.5 watt  
 $R_{28}=0.27$  megohm, 1 watt  
 $R_{29}=120$  ohms, 0.5 watt  
 $R_{30}=2.2$  megohms, 0.5 watt

$R_{31}$ =Potentiometer, horizontal-hold control, 50000 ohms, 0.5 watt  
 $SG_1$ =Spark-gap capacitor, 0.5 pF, 1000 V, RCA Stock No. 120819 or equiv.  
 $T_1$ =Horizontal-output (fly-back) transformer, RCA Stock No. 120820 or equiv.  
 $T_2$ =Vertical-output transformer, RCA Stock No. 120821 or equiv.

See Note on page 722.

### Circuit Description (Cont'd)

waveform. A control stage establishes the bias for the oscillator and, in this way, controls the firing edge of the oscillator stage. The 5GH8A triode-pentode is used in these stages. The triode section is used as the oscillator tube; the pentode section is used as a high-gain, low-drift control tube.

When the composite video signal is generated at the television broadcast station, the leading edge of each horizontal sync pulse, of alternate equalizing pulses, and of alternate serrations of the vertical sync pulses are correctly timed to initiate the horizontal retrace period. These leading-edge components are extracted from the composite output from the sync separator (shown in circuit 29-31) and are used to synchronize the operation of the horizontal oscillator.

The sync waveform is differentiated by the RC network ( $C_1$  and  $R_2$ ) at the input to the horizontal deflection circuit to obtain negative and positive voltage spikes that correspond to the leading and lagging edges, respectively, of the rectangular sync pulses. The amplitude of these voltage spikes is dependent upon only the peak value of the sync pulses and is not affected by the time durations of these pulses. The differentiating circuit, therefore, does not respond to the flat portions of the vertical sync pulses; as a result, with the exception of the serra-

tions, the vertical sync pulses do not affect the operation of the horizontal-deflection circuits. The leading edge of alternate serrations, however, correspond to the start of horizontal-retrace periods and thus may be considered as merely another horizontal sync signal.

The differentiated sync waveform is applied to the junction of the twin silicon diode  $CR_1$  used in a phase-discriminator type of afc network. The positive voltage spikes in the differentiated waveform have no effect on the discriminator network. The negative-voltage spikes are compared with pulses fed back from the horizontal oscillator to derive the synchronizing voltage. The frequency of the horizontal oscillator and the repetition rate of the horizontal sync pulses should both be 15,750 Hz, the desired horizontal scanning rate for the picture tube. If the pulses from the oscillator are not coincident with the horizontal sync pulses, the phase discriminator develops an error voltage at the control grid of the control tube. The control tube then varies the bias and, thus, the firing point of the oscillator until it is locked in phase with the horizontal sync pulses.

The parallel LC network ( $L_2$  and  $C_{12}$ ) in the cathode circuit of the oscillator resonates at 15,750 Hz to provide frequency stabilization for the oscillator. The HOLD control  $R_{31}$  adjusts the frequency of the oscil-

29-33

## HORIZONTAL-DEFLECTION CIRCUIT AND HIGH-VOLTAGE POWER SUPPLY (Cont'd)

### Circuit Description (Cont'd)

lator to achieve an exact lock-in with the horizontal sync pulses. The output of the blocking oscillator is coupled through  $C_{11}$  and  $R_1$  to the control grid of the 24JE6A power pentode used in the horizontal-output stage. This tube drives the high-voltage flyback transformer  $T_1$  that develops the scanning voltage for the horizontal deflection coils (shown in circuit 29-35).

The sudden cutoff of plate current in the horizontal output stage at the end of the trace period causes a very large, positive-going voltage pulse to be generated across the high-voltage transformer  $T_1$ . The 3A3A half-wave rectifier circuit converts this pulse to a positive dc of 21,500 volts which is applied to the second anode of the color picture tube.

Regulation of the high voltage is achieved by use of a 17KV6A pulse-regulator stage connected in shunt with a section of the primary of the high-voltage flyback transformer. The regulator stage acts as a variable load on the flyback pulse source and, in this way, maintains an essentially constant pulse amplitude in the primary winding of the high-voltage transformer with changing loads on the high-voltage supply. This action assures that a constant-amplitude, stepped-up pulse is applied to the 3A3A rectifier. The rectifier output delivered to the picture tube, therefore, is maintained at a constant value of 21,500 volts.

Removal of negative overshoots that would be developed across the high-voltage transformer because of a flywheel effect is accomplished by the damper diode  $CR_2$ . This diode is shaped like a fuse and snaps into clips that can be mounted on the same circuit board with the horizontal deflection circuits and is readily replaced during servicing.


The polarity of the damper diode is such that the positive pulse developed across the high-voltage transformer causes no current flow through it. For negative pulses, however, the damper diode provides a low impedance path for the current, and energy stored in the horizontal output transformer (and the horizontal deflection coils) is dissipated in the damper circuit. The rectified current through the damper diode develops the boosted  $B+$  voltage of +700 volts across capacitor  $C_{21}$  in the damper anode circuit.

The two auxiliary windings on the high-voltage transformer supply supplementary pulse voltages. The upper winding supplies gating pulses to the burst-gate and the color-killer amplifiers (shown in circuit 29-34). The convergence pulse is developed across the lower auxiliary winding. Keying pulses for the age amplifier and the horizontal blanking diode are derived from the capacitor network (junction of  $C_{25}$  and  $C_{27}$ ) in the primary circuit of the high-voltage transformer.

Transformer  $T_2$  shown in the circuit diagram is the vertical output transformer. The drive signal from the vertical output stage (shown in circuit 29-32) is developed across the primary of this transformer and coupled by the secondary winding through jack  $J_2$  to the vertical deflection coils (shown in circuit 29-35). An auxiliary winding on transformer  $T_2$  develops the keying pulse for the vertical blanking diode. The horizontal scanning signal from the high-voltage (horizontal-output) transformer are also coupled through jack  $J_1$  to the horizontal deflection coils. The horizontal and vertical signals to the convergence board are routed through jack  $J_2$ . (Jacks  $J_1$  and  $J_2$  mate with plugs  $P_2$  and  $P_1$ , respectively, on circuit 29-35.)

29-34

**CHROMA CIRCUITS**  
For Color Television Receiver

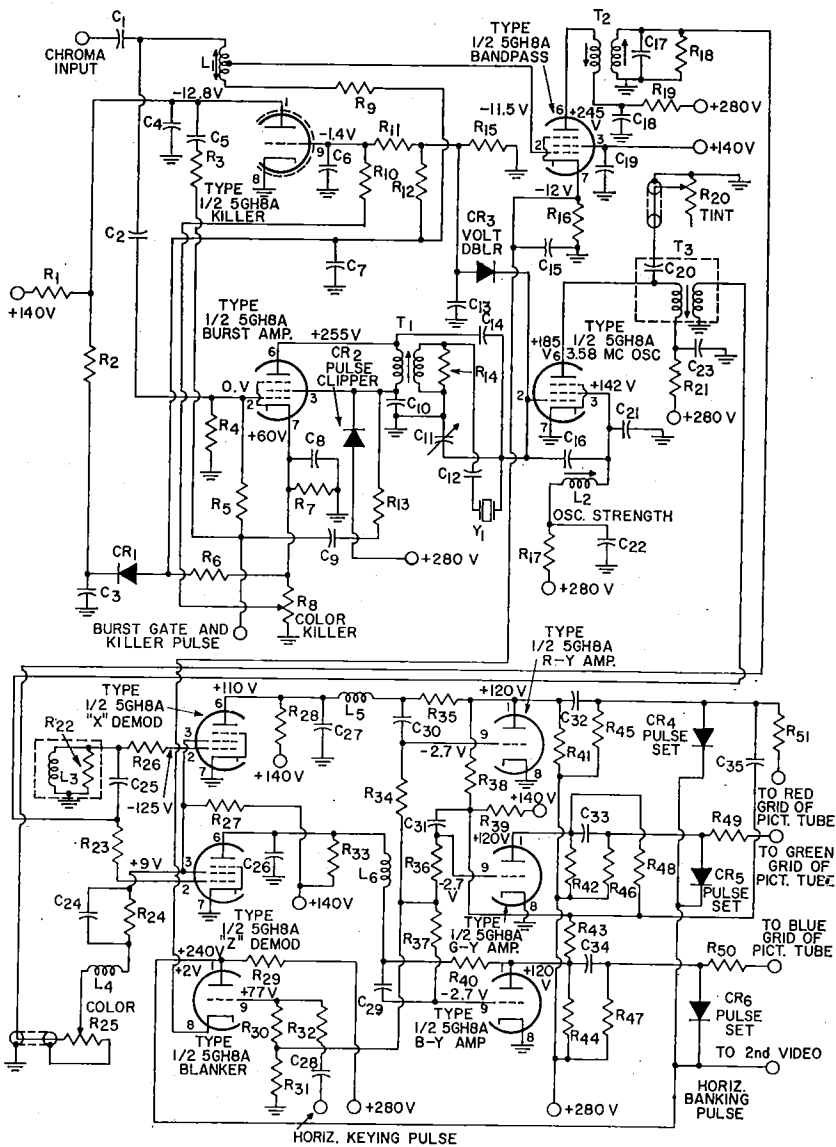

See Note on page 722.

## 29-34

## CHROMA CIRCUITS (Cont'd)

## Parts List

- $C_1=27$  pF, ceramic, 500 V, NPO  
 $C_2=68$  pF, ceramic, 500 V, N750  
 $C_3, C_5, C_6, C_8, C_9, C_{22}, C_{23}, C_{29}$  through  $C_{31}=0.01$  pF, ceramic, 500 V  
 $C_4=390$  pF, ceramic, 500 V  
 $C_7=0.047$   $\mu$ F, Mylar, 100 V  
 $C_{10}, C_{18}=1000$  pF, ceramic, 500 V  
 $C_{11}$ =Trimmer, 2 to 10 pF, RCA Stock No. 116501 or equiv.  
 $C_{12}=220$  pF, ceramic, 500 V  
 $C_{13}=10$  pF, ceramic, 500 V, N150  
 $C_{14}, C_{16}=0.82$  pF  $\pm 5\%$ , headed lead, 500 V  
 $C_{15}=820$  pF, ceramic, 500 V  
 $C_{17}=390$  pF  $\pm 5\%$ , Mylar, 500 V  
 $C_{19}, C_{20}, C_{27}=33$  pF, ceramic, 500 V, N150  
 $C_{21}=10$  pF  $\pm 5\%$ , ceramic, 500 V, NPO  
 $C_{21}=0.027$  pF, Mylar, 100 V  
 $C_{25}=430$  pF  $\pm 5\%$ , mica, 500 V  
 $C_{28}=150$  pF, ceramic, 500 V  
 $C_{29}=1.2$  pF, ceramic, 500 V  
 $CR_1, CR_4, CR_5, CR_6$ =Silicon diode, RCA Stock No. 119596 or equiv.  
 $CR_2$ =Diode, pulse clipper, RCA Stock No. 113998  
 $CR_3$ =Diode, type 1N60  
 $L_1$ =Variable inductor, chroma-takeoff coil, RCA Stock No. 120797 or equiv.  
 $L_2$ =Variable inductor, oscillator strength adjustment, RCA Stock No. 120798 or equiv.  
 $L_3$ =Phase-shift coil, 3.9  $\mu$ H, part of quadrature assembly (RCA Stock No. 120830 or equiv.) with  $R_{22}$   
 $L_4$ =RF coil, 3.9  $\mu$ H, RCA Stock No. 116510 or equiv.  
 $L_5, L_6$ =RF choke, 620  $\mu$ H, RCA Stock No. 109257 or equiv.  
 $R_1=3.9$  megohms, 0.5 watt  
 $R_2=0.15$  megohm, 0.5 watt  
 $R_3, R_4, R_7=47000$  ohms, 0.5 watt  
 $R_5=82000$  ohms, 0.5 watt  
 $R_6, R_{10}=10$  megohms, 0.5 watt  
 $R_8$ =Potentiometer, color-killer adjustment, 1 megohm, 0.5 watt, RCA Stock No. 120805 or equiv.  
 $R_9=82$  ohms, 0.5 watt  
 $R_{11}=2.7$  megohms, 0.5 watt  
 $R_{12}=2.2$  megohms, 0.5 watt  
 $R_{13}=3900$  ohms, 0.5 watt  
 $R_{14}, R_{16}=390$  ohms, 0.5 watt  
 $R_{15}=82000$  ohms, 0.5 watt  
 $R_{17}=47000$  ohms, 1 watt  
 $R_{18}=560$  ohms, 0.5 watt  
 $R_{19}=1500$  ohms, 0.5 watt  
 $R_{20}$ =Potentiometer, tint control, 10000 ohms, 0.5 watt, RCA Stock No. 120774 or equiv.  
 $R_{21}=6800$  ohms, 1 watt  
 $R_{22}=120$  ohms  $\pm 5\%$ , 1 watt, part of quadrature assembly with  $L_3$   
 $R_{23}, R_{25}=470$  ohms, 0.5 watt  
 $R_{24}=1500$  ohms, 0.5 watt  
 $R_{25}$ =Potentiometer, color control, 500 ohms, 0.5 watt, RCA Stock No. 120776 or equiv.  
 $R_{27}=0.1$  megohm, 0.5 watt  
 $R_{28}, R_{30}=6800$  ohms  $\pm 5\%$ , fixed film, 0.5 watt  
 $R_{29}=4700$  ohms  $\pm 5\%$ , 1 watt  
 $R_{30}=0.22$  megohm, 0.5 watt  
 $R_{31}=82000$  ohms, 0.5 watt  
 $R_{32}=68000$  ohms, 0.5 watt  
 $R_{33}=8200$  ohms  $\pm 5\%$ , fixed film, 0.5 watt  
 $R_{34}, R_{36}, R_{37}=1$  megohm, 0.5 watt  
 $R_{35}, R_{10}=0.18$  megohm, 0.5 watt  
 $R_{38}=0.33$  megohm, 0.5 watt  
 $R_{41}, R_{42}, R_{44}=39000$  ohms  $\pm 5\%$ , 1 watt  
 $R_{43}=0.56$  megohm, 0.5 watt  
 $R_{15}, R_{16}, R_{17}=2.2$  megohms, 0.5 watt  
 $R_{18}=0.39$  megohm, 0.5 watt  
 $R_{19}, R_{20}, R_{31}=1000$  ohms, 0.5 watt  
 $T_1$ =Burst transformer, RCA Stock No. 120816 or equiv.  
 $T_2=3.58$ -MHz oscillator transformer, RCA Stock No. 120816 or equiv.  
 $Y_1=3.58$ -MHz oscillator crystal

## Circuit Description

These circuits extract the color information from the 3.58-MHz chrominance sidebands included in the composite color video signal. The color information is included in the chrominance sidebands in the form of two difference-frequency components that have a phase difference of 90 degrees and that are derived in the color television transmitter by subtraction of the luminance (Y) signal from the red (R) and blue (B) color signals. [The green color-difference (G—Y) components are not transmitted, but instead, are derived in the color receiver by addition of complements (negative values) of the R—Y and B—Y signals.] To accomplish the demodulation function, the chroma circuits are required to develop two continuous-wave 3.58-MHz signals that have a phase difference of 90 degrees, each of which must be added

vectorially to the chrominance sidebands. In other words, the 3.58MHz color subcarrier suppressed during transmission must be reinserted by the chroma circuits before the R—Y and B—Y color-difference information contained in the chrominance sidebands can be detected.

The chroma circuits operate from the color receiver low-voltage (280-volt) power supply. Five 5GH8A triode-pentodes fulfill the electron-tube requirements for the ten chroma stages. The heaters of these tubes are connected in series with those of other tubes in the receiver; operating power for the series-heater string is obtained directly from the 117-volt ac power line.

The input to the chroma circuits is the composite video signal after it has been amplified by the first video amplifier and the sync-agc-



## 29-34

## CHROMA CIRCUITS (Cont'd)

## Circuit Description (Cont'd)

and-chroma driver (shown on circuits 29-32 and 29-33, respectively). In addition to the chrominance sidebands, this composite signal includes the luminance signal (equivalent to the monochrome picture signal in black-and-white transmissions), the conventional horizontal and vertical sync pulses, and the color burst synchronizing signal. The color "burst" is a 3.58 MHz reference signal of approximately 8 cycles that occurs during the horizontal retrace blanking interval immediately following the horizontal sync pulse (refer to Fig. 96, page 73).

The chroma input is applied simultaneously to the chroma bandpass and burst amplifiers. When no burst signal is included in the chroma input (i.e., for black-and-white transmissions), the color-killer stage develops, by means of the current through diode  $CR_1$ , a negative dc voltage across capacitor  $C_7$  that biases the chroma bandpass amplifier beyond cutoff; as a result the chroma input is not applied to the color demodulators.

The operation of the burst amplifier is controlled by a gating signal (burst-gate and killer pulse) from an auxiliary winding on the horizontal-output transformer ( $T_1$  in circuit 29-33). This gating pulse is generated at the same time and has the same time duration as the horizontal blanking pulse used to blank out the horizontal retrace on the color picture tube. This interval corresponds to the period of the horizontal sync pulse and the 3.58MHz burst synchronizing signal that immediately follows the sync pulse. The burst amplifier, therefore, only amplifies this portion of the chroma input. The primary of transformer  $T_1$  in the plate circuit of the burst amplifier, however, is tuned to 3.58 MHz so that only the 3.58-MHz burst signal is coupled from the plate of the burst amplifier.

The separated burst is coupled by transformer  $T_1$  to the control-grid circuit of a 3.58-MHz injection-locked oscillator circuit. The oscillator, therefore, is forced to operate in step (with respect to both frequency and phase) with the incoming burst signal. The 3.58-MHz crystal  $Y_1$  is used to assure excellent frequency stability in the oscillator circuit. The oscillator develops the continuous-wave 3.58-MHz reference signal applied to the control grids of the Z and X demodulators. The quadrature network ( $L_3$  and  $R_{33}$ ) causes a 90-degree phase shift in the 3.58-MHz signal applied to the control grid of the X demodulator. The 3.58-MHz chrominance sidebands must also be applied to the X and Z demodulators before these stages can derive the color difference signals. These sideband signals are obtained from the chroma bandpass amplifier.

The dc bias voltage developed in the grid circuit of the oscillator stage is used to control color-killer action and to derive an agc voltage for the chroma bandpass amplifier. The cathode-to-grid section of the oscillator triode, diode  $CR_3$ , and associated components form a two-diode voltage-doubler circuit. Any dc voltage developed in the oscillator grid circuit is approximately doubled at the voltage-doubler output (anode circuit of diode  $CR_4$ ). When no color signal is received (i.e., no burst signal applied to the oscillator), the dc voltage at the grid of the oscillator is approximately -5 volts. The -10 volts developed across  $C_{13}$  and  $R_{13}$  in the anode circuit of voltage-doubler diode  $CR_4$  is reduced to approximately -1.4 volts at the control grid of the color-killer stage. For this low level of bias, the color killer stage conducts and develops a cutoff bias for the chroma bandpass amplifier.

When color signals are being

## CHROMA CIRCUITS (Cont'd)

## Circuit Description (Cont'd)

received, the burst signals applied to the oscillator causes the oscillator grid bias voltage to increase to approximately  $-8$  volts, depending on the amplitude of the burst signal. The dc voltage at the anode of the voltage-doubler diode then rises to approximately  $-16$  volts, and the bias on the color-killer stage is increased to about  $-4$  volts. For this bias level, no current flows through the color-killer stage, and the cutoff bias for the chroma bandpass amplifier provided by the color-killer stage is removed. The grid bias for the bandpass amplifier is then derived from the dc voltage at the grid of the 3.58-MHz oscillator. Because this voltage varies with the amplitude of the burst signal, it provides automatic-gain control for the bandpass amplifier.

With the removal of the cutoff bias provided by the color killer, the bandpass amplifier is allowed to amplify and pass the 3.58-MHz chrominance sidebands contained in the chroma input (video signal). The single-tuned transformer  $T_2$  in the plate circuit of the bandpass amplifier forms a selective load to the 3.58-MHz chrominance sidebands. The output of the bandpass amplifier, therefore, is a 3.58-MHz signal that contains the R-Y and B-Y color-difference information. The instantaneous phase difference of the 3.58-MHz color-difference components with respect to the burst synchronizing signal defines the color information being transmitted, as indicated by the chart on page 73 in the section Electron Tube Applications.

The 3.58-MHz color-difference signals from the bandpass amplifier are coupled by transformer  $T_2$  to the screen grids of the X and Z color demodulators where they are mixed with the continuous-wave 3.58-MHz signal from the oscillator. The color demodulators are essentially

synchronous detectors. These types of detectors are phase sensitive, and their output is determined not only by the amplitudes of the two input signals, but also by the phase relationship of these inputs. If the amplitudes of the chrominance and continuous wave inputs to the demodulators are considered to be constant, the input of the demodulators is affected by the phase relationship of the two input signals as follows: When the chrominance and the continuous signals are in phase, the output of the demodulators is maximum in the negative direction. When the two signals are 180 degrees out of phase, the output is maximum in the positive direction. A phase difference of 90 or 270 degrees results in a zero output from the demodulators.

The X and Z color demodulators are biased so that the plate current of each demodulator tube is small during the zero-signal condition. The continuous-wave signal applied to the control grid gates the tube into conduction for the full positive half cycle. During most of the negative half cycle, the tube is cut off. With no chrominance signal applied to the screen grid, the plate current of the demodulator tube consists essentially of 3.58-MHz pulses. A low-pass filter in the plate circuit of the demodulator removes the 3.58-MHz component so that the dc plate voltage decreases below the level obtained when there is no input to either the control or screen grid. The dc level obtained when only the continuous-wave reference signal is applied represents the zero output of the color demodulators; only changes in the average plate voltage above and below this level will be passed by the output coupling capacitor to the succeeding stages.

When the chrominance signal applied to the screen grid is in phase with the continuous-wave reference signal applied to the control grid,

## 29-34

**CHROMA CIRCUITS (Cont'd)****Circuit Description (Cont'd)**

the demodulator tube conducts more heavily during the periods that the reference signal permits conduction. The plate voltage of the demodulator then decreases below the zero level, and the output coupling capacitor couples the negative change to the next stage. Conversely, if the two signals are 180 degrees out of phase, the average plate current decreases. The attendant rise in average plate voltage causes a positive change to be coupled to the next stage. For 90- or 270-degree phase differences, the two signals tend to add together at certain times and to cancel each other times so that the average plate current is essentially unchanged.

In the development of the color-difference signals at the transmitter, the phase of the  $R - Y$  signal is shifted 90 degrees with respect to the burst reference signal and the  $B - Y$  signal is in phase with the reference signal. The  $B - Y$  component of the chrominance sidebands, therefore, is in phase with the reference signal applied to the  $Z$  demodulator, and the  $R - Y$  component is in phase with the phase-shifted reference signal applied to the  $X$  demodulator. The output of the  $Z$  demodulator then is the detected  $G - Y$  signal, and the output of the  $X$  demodulator is the detected  $R - Y$  signal. These signals are coupled to the  $B - Y$  and  $R - Y$  difference-

signal amplifiers, respectively.

If strict consideration is given to signal phase relationships, the outputs of the  $X$  and  $Z$  demodulators are  $-(R - Y)$  and  $-(B - Y)$  signals. The positive versions of these color-difference signals results from the inversions provided by the  $R - Y$  and  $B - Y$  color-difference amplifiers. The  $G - Y$  color-difference signal is synthesized by addition of portions of the  $R - Y$  and  $B - Y$  signals from the plates of the  $R - Y$  and  $B - Y$  difference amplifiers in the resistor matrix network at the input to the  $G - Y$  color-difference amplifier. The vector sum of these quantities results in a  $-(G - Y)$  signal. This signal is amplified and inverted by the  $G - Y$  amplifier to obtain the  $G - Y$  signal.

The color difference amplifiers all operate in the grounded-cathode mode with the grid bias taken from the blanker circuit, and only capacitance coupling is used from the outputs of these amplifiers to the picture tube. The dc reference level for the three color grids of the picture tube are established by a clamp diode circuit in the output of each difference amplifier. The outputs of the  $R - Y$ ,  $G - Y$ , and  $B - Y$  color-difference amplifier are coupled to the red, green, and blue grids, respectively, of the color picture tube.

## 29-35

**PICTURE TUBE AND ASSOCIATED CIRCUITS**

For Color Television Receiver


**Circuit Description**

These circuits include the picture tube and associated input-coupling and biasing networks, the convergence board, and the horizontal and vertical deflection coils for a color television receiver. The dc operating potentials for the picture tube are derived from the receiver low-voltage (280-volt) power supply, the B Boost (700-volt) voltage developed by the horizontal-output circuit, and

the high-voltage (21,500-volt) rectifier circuit. The 6.3 volt heater power for the picture tube is obtained from a transformer ( $T_1$  in circuit 29-29) connected across the 117-volt ac power line.

The 15LP22 color picture tube has a number of unique features. The phosphor-dot screen uses a rare-earth, red-emitting phosphor and improved blue and green phosphors.

## 29-35 PICTURE TUBE AND ASSOCIATED CIRCUITS (Cont'd)

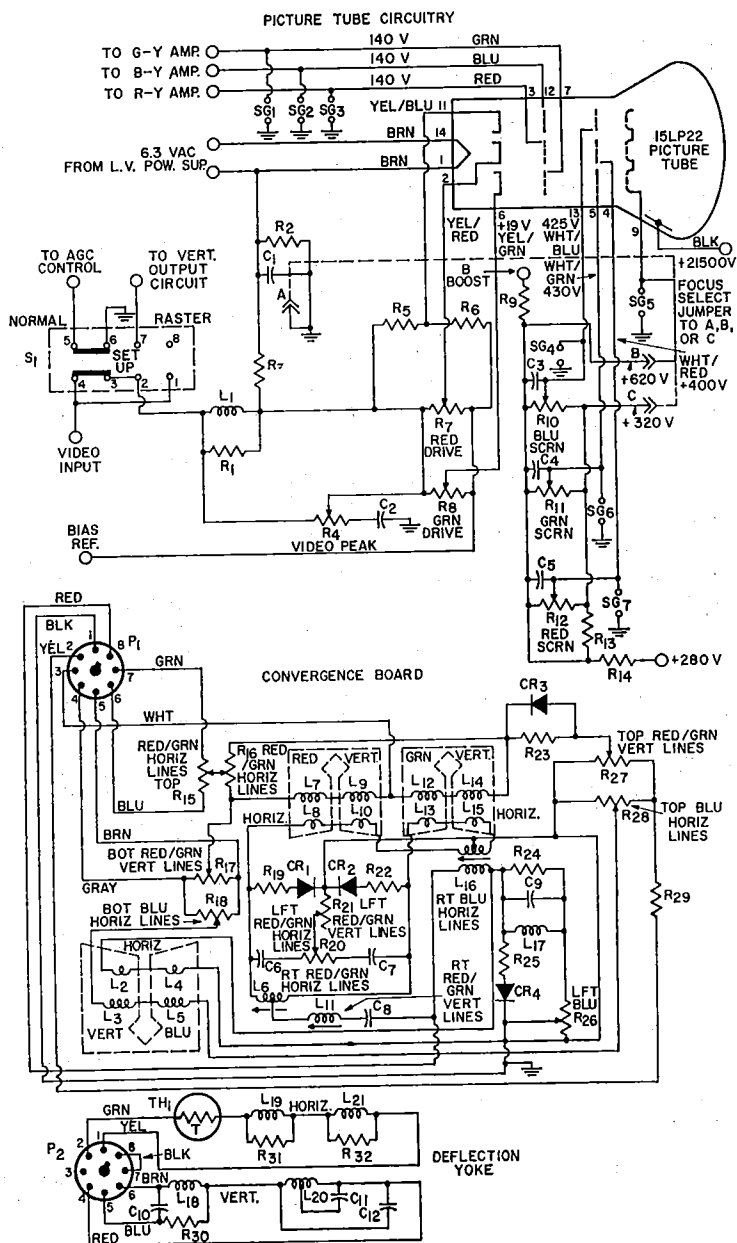

## 29-35 PICTURE TUBE AND ASSOCIATED CIRCUITS (Cont'd)

## Parts List

- $C_1=0.1 \mu\text{F}$ , Mylar, 400 V  
 $C_2=47 \text{ pF}$ , ceramic, 500 V, N750  
 $C_3, C_4, C_5=1000 \text{ pF}$ , ceramic, 500 V  
 $C_6, C_7=0.15 \mu\text{F}$ , Mylar, 75 V (part of convergence-board assembly)  
 $C_8=0.082 \mu\text{F}$ , Mylar, 100 V (part of convergence-board assembly)  
 $C_9=0.27 \mu\text{F}$ , Mylar, 75 V (part of convergence-board assembly)  
 $C_{10}=180 \text{ pF}$ , 250 V, part of deflection-yoke assembly  
 $C_{11}=3900 \text{ pF}$ , part of deflection-yoke assembly  
 $C_{12}=82 \text{ pF}$ , 3000 V, part of deflection-yoke assembly  
 $CR_1, CR_2, CR_3, CR_4$ =Selenium rectifier assembly, RCA Stock No. 120058 or equiv.  
 Convergence board=RCA Stock No. 120052 or equiv.  
 Deflection yoke=RCA Stock No. 120890 or equiv.  
 $L_1=820 \mu\text{H}$ , part of network assembly (RCA Stock No. 120796 or equiv.) with  $R_1$   
 $(L_2-L_4, L_5-L_6) (L_7-L_9, L_8-L_{10}) (L_{11}-L_{14}, L_{13}-L_{15})$ =Convergence-coil assembly, RCA Stock No. 121343 or equiv., part of convergence-board assembly  
 $L_{10}$ =Variable inductor, right red-green vertical lines adjustment, RCA Stock No. 120059 or equiv., part of convergence-board assembly  
 $L_{11}$ =Variable inductor, right red-green vertical lines adjustment, RCA Stock No. 121443 or equiv., part of convergence-board assembly  
 $L_{10}$ =Variable inductor, right blue horizontal lines adjustment, RCA Stock No. 120060 or equiv., part of convergence-board assembly  
 $L_{17}=120 \mu\text{H}$ , RCA Stock No. 118245 or equiv., part of convergence-board assembly  
 $L_{18}, L_{20}$ =Vertical-deflection coils, part of deflection-yoke assembly  
 $L_{19}, L_{21}$ =Horizontal-deflection coils, part of deflection-yoke assembly  
 $P_1$ =Connector for convergence board, 8-pin male type, RCA Stock No. 112728 or equiv. (mates with  $J_1$  on circuit 26-34)  
 $P_2$ =Connector for yoke assembly, 8-pin male type, RCA Stock No. 114767 or equiv. (mates with  $J_2$  on circuit 26-34)  
 $R_1=4700 \text{ ohms}$ , 0.5 watt, part of network assembly with  $L_1$   
 $R_2=0.18 \text{ megohm}$ , 0.5 watt  
 $R_3=0.15 \text{ megohm}$ , 0.5 watt  
 $R_4$ =Potentiometer, video peak adjustment, 0.1 megohm, 0.5 watt, part of assembly with  $R_7$  and  $R_8$  (RCA Stock No. 120811 or equiv.)  
 $R_5=5600 \text{ ohms}$ , 0.5 watt  
 $R_6=12000 \text{ ohms}$ , 0.5 watt  
 $R_7$ =Potentiometer, red drive adjustment, 6000 ohms, 0.5 watt, part of assembly with  $R_5$  and  $R_8$  (RCA Stock No. 120811 or equiv.)  
 $R_8$ =Potentiometer, green drive adjustment, 6000 ohms, 0.5 watt, part of assembly with  $R_5$  and  $R_7$  (RCA Stock No. 120811 or equiv.)  
 $R_9=33000 \text{ ohms} \pm 5\%$ , 0.5 watt  
 $R_{10}, R_{11}, R_{12}$ =Three-section potentiometer; screen-grid adjustments for blue, green, and red electron guns, respectively; each section: 1.5 megohms, 0.5 watt; RCA Stock No. 120812 or equiv.  
 $R_{13}=47000 \text{ ohms}$ , 0.5 watt  
 $R_{14}=1000 \text{ ohms}$ , 0.5 watt  
 $R_{15}$ =Potentiometer, top red/green horizontal lines adjustment, 120 ohms, 0.5 watt, RCA Stock No. 106320 or equiv. (part of convergence-board assembly)  
 $R_{16}$ =Potentiometer, bottom red/green horizontal lines adjustment, 350 ohms, 0.5 watt, RCA Stock No. 116635 or equiv. (part of convergence-board assembly)  
 $R_{17}$ =Potentiometer, bottom red/green vertical lines adjustment, 60 ohms, 0.5 watt, RCA Stock No. 105059 or equiv. (part of convergence-board assembly)  
 $R_{18}$ =Potentiometer, bottom blue horizontal lines adjustment, 60 ohms, 0.5 watt, RCA Stock No. 105059 or equiv. (part of convergence-board assembly)  
 $R_{19}, R_{22}=100 \text{ ohms}$ , 1 watt, part of convergence-board assembly  
 $R_{20}$ =Potentiometer, left red/green horizontal lines adjustment, 100 ohms, 0.5 watt, RCA Stock No. 120949 or equiv. (part of convergence-board assembly)  
 $R_{21}$ =Potentiometer, left red/green vertical lines adjustment, 100 ohms, 0.5 watt, RCA Stock No. 120949 or equiv. (part of convergence-board assembly)  
 $R_{23}=270 \text{ ohms}$ , 0.5 watt (part of convergence-board assembly)  
 $R_{24}=180 \text{ ohms}$ , 1 watt (part of convergence-board assembly)  
 $R_{25}=270 \text{ ohms}$ , 1 watt (part of convergence-board assembly)  
 $R_{26}$ =Potentiometer, left blue adjustment, 60 ohms, 3 watts, RCA Stock No. 114627 or equiv. (part of convergence-board assembly)  
 $R_{27}$ =Potentiometer, top red/green vertical lines adjustment, 350 ohms, 0.5 watt, RCA Stock No. 116635 or equiv. (part of convergence-board assembly)  
 $R_{28}$ =Potentiometer, top blue horizontal lines adjustment, 350 ohms, 0.5 watt, RCA Stock No. 116635 or equiv. (part of convergence-board assembly)  
 $R_{29}=82 \text{ ohms}$ , 0.5 watt (part of convergence-board assembly)  
 $R_{30}=4700 \text{ ohms}$ , 2 watts (part of deflection-yoke assembly)  
 $R_{31}, R_{32}=220 \text{ ohms}$ , 0.5 watt  
 $S$ =Service switch, RCA Stock No. 120838 or equiv.  
 $SG_1$  through  $SG_7$ =Capacitor, spark-gap, 0.5 pF, 1000 V, RCA Stock No. 120819 or equiv.  
 $TH_1$ =Thermistor; cold resistance, 1.3 ohms; RCA Stock No. 120891

See Note on page 722.

## Circuit Description (Cont'd)

The new phosphors are more efficient and are capable of producing 38 per cent brighter highlights than previous color picture tubes. The directly viewed shadow-mask picture

tube incorporates a screen with nearly straight sides and sharply rounded corners.

The 15LP22 is designed for operation with the blue gun down. The

## 29-35 PICTURE TUBE AND ASSOCIATED CIRCUITS (Cont'd)

## Circuit Description (Cont'd)

anode bulb contact for high voltage connection is still located in the top section of the tube. Operation in the blue-down orientation, with respect to the viewing screen, provides optimum compromise of pincushion distortion at the top and bottom of the screen. The tube is equipped with an integral filter glass protective window, sealed to the base plate of the tube with a clear resin. An external magnetic shield is not required on the 15LP22. Another main feature of the color picture tube is an einzel-lens focus system. This system is relatively insensitive to variations of the high voltage so that the tube maintains good focus even with variations in picture brightness.

The focus system for the color picture tube is very similar to that used in instruments equipped with a black-and-white picture tube. Normally, the 15LP22 will have optimum focus when connected to ground potential. However, provisions to change the focus potential are facilitated by a pin connector from pin 9 of the picture tube. The focus selected jumper can be connected to 620 volts, 320 volts, or ground merely by relocating the slip-on connector to the proper stake extending from the circuit board.

A three-position service switch  $S_1$  is incorporated into the picture-tube circuitry to facilitate receiver setup and adjustment. The NORMAL position of the switch, of course, permits normal receiver operation. With the switch in the SETUP or RASTER position, the video input is disconnected from the picture tube, and the ground return for the age circuit is opened. Raster height and width and color and background levels can then be more easily adjusted.

The output of the color difference amplifiers are applied to the respective grids of the tricolor picture tube. The luminance signal from the

second video amplifier is applied to the three cathodes of the color picture tube. These signals combine to intensity modulate the three electron beams to produce the color image on the picture-tube screen.

The horizontal and vertical deflection coils in a yoke on the neck of the picture tube deflect the electron beams, in response to signals received from the horizontal and vertical output stages, to produce the horizontal and vertical scanning required to trace the image on the picture-tube screen. (These coils are connected in shunt with the respective horizontal and vertical output transformer.)

The horizontal output circuit provides a sawtooth current waveform at a frequency of 15,750 Hz to the horizontal-deflection coils, and the vertical output circuit provides a 60-Hz sawtooth current wave to the vertical-deflection coils. The picture tube electron beams are simultaneously deflected horizontally across the screen at a rate of 15,750 Hz and vertically at a rate of 60 Hz.

At the completion of each horizontal trace (end of rising portion of sawtooth current wave), the beam is deflected back to the left side of the screen (retrace) to start another trace period. A positive blanking pulse (included in the video signal) applied to the cathodes of the picture tubes cuts off the picture tube during this period so that the retrace lines do not appear on the tube screen. The picture tube is similarly blanked at the end of each vertical-trace period.

Correct color reproduction requires that the three beams of the color picture tubes meet, or converge, at the shadow mask and excite color dots of the same trios. The three electron guns of the color picture tube are mechanically tilted toward the center axis of the tube so that virtual convergence is ob-

## 29-35 PICTURE TUBE AND ASSOCIATED CIRCUITS (Cont'd)

## Circuit Description (Cont'd)

tained with no external converging force applied. Slight bending of one or more of the beams may be required for exact convergence. The convergence circuit performs this function.

The components on the convergence board shown in the circuit diagram are mounted on a disk-shaped circuit board with a center hole that permits it to be fitted directly on the neck of the color picture tube. These components are interconnected in a dynamic type of convergence system. In this system, sine wave currents are used to provide horizontal convergence, and parabolic current waves are used to provide vertical convergence.

The sine waves of current used to provide horizontal convergence are derived from a voltage pulse developed across an auxiliary winding of the high-voltage transformer ( $T_1$  in circuit 29-33) and applied through pin 8 of the convergence-board input connector  $P_1$ . The current through each of the three sets of horizontal convergence coils ( $L_2$  and  $L_1$ ,  $L_3$  and  $L_{10}$ , and  $L_{13}$  and  $L_{15}$ ) is individually adjustable in both amplitude and phase. The phase of the convergence current is adjusted by the Horizontal Shape control  $L_6$ , which resonates with the two 0.15-microfarad capacitors  $C_0$  and  $C_7$  at the line frequency (15,750 Hz). The sine-wave convergence current is produced by ringing this resonant

circuit with the pulse obtained from the high-voltage transformer. Potentiometers  $R_{15}$ ,  $R_{16}$ ,  $R_{18}$ ,  $R_{20}$ , and  $R_{23}$  adjust the amplitude of the sine-wave convergence current.

Vertical-frequency (60-Hz) sawtooth voltages obtained from secondary windings of the vertical-output transformer ( $T_2$  in circuit 29-33), applied through pins 4 and 5 and pins 6 and 7 of connector  $P_1$ , are used to derive the vertical convergence-current waveform. Because of the integrating action of the convergence coils, this sawtooth voltage results in a parabolic current wave through the convergence coils. Potentiometer  $R_{21}$  adjusts the amplitude of the vertical voltage parabola applied to the three sets of vertical convergence coils ( $L_3$  and  $L_6$ ,  $L_7$  and  $L_9$ , and  $L_{12}$  and  $L_{14}$ ).

A vertical-frequency sawtooth voltage from a secondary winding of the vertical-output transformer, is applied across potentiometer  $R_{17}$ . The sawtooth voltage is obtained from center tapped transformers; the voltage at the center of potentiometer  $R_{17}$  therefore, is approximately zero with respect to circuit ground. Adjustment of this potentiometer mixes either positive or negative sawtooth voltages with the parabolic convergence voltage and, in this way, controls the shape of the convergence signal applied to the convergence coils.

## INDEX

|                                       | <i>Page</i>        |   | <i>Page</i> |
|---------------------------------------|--------------------|---|-------------|
| Absolute Maximum System of Ratings .. | 95                 | Bias:                                     |             |
| AC/DC Superheterodyne Receiver .....  | 673                | battery .....                             | 84          |
| Admittance, Input .....               | 27                 | cathode (self) .....                      | 84          |
| All-Purpose Power Supplies .....      | 707                | diode .....                               | 21          |
| AM Detection .....                    | 19                 | grid-resistor .....                       | 22, 85      |
| AM/FM Receiver .....                  | 674                | Black-and-White Television Receiver ..... | 706         |
| Amplification .....                   | 24                 | Burst .....                               | 60, 73      |
| Amplification Factor ( $\mu$ ) .....  | 13                 | Bypassing .....                           | 84          |
| Amplifier:                            |                    | Calculation of:                           |             |
| audio-frequency .....                 | 15, 25             | amplification factor .....                | 13          |
| audio mixer, circuit .....            | 696                | cathode (self-bias) resistor .....        | 84          |
| cathode-drive .....                   | 37                 | cathode load resistor .....               | 42          |
| cathode-follower .....                | 40                 | control-grid-plate transconductance ..    | 14          |
| Class A .....                         | 25, 28             | filament resistor power dissipation ..    | 82          |
| class AB .....                        | 25, 34             | filament (or heater) resistor value ..    | 82          |
| class AB <sub>1</sub> .....           | 34                 | gain-bandwidth product .....              | 57          |
| class AB <sub>2</sub> .....           | 37                 | harmonic distortion .....                 | 30, 32      |
| class B .....                         | 25, 37             | load resistance .....                     | 31, 35      |
| class C .....                         | 25                 | noise figure .....                        | 55          |
| high-fidelity .....                   | 49, 90             | operating conditions from                 |             |
| intermediate-frequency, circuit ..... | 680                | conversion nomograph .....                | 32          |
| limiter .....                         | 50                 | peak inverse plate voltage .....          | 97          |
| luminance .....                       | 60                 | plate efficiency .....                    | 14          |
| parallel .....                        | 28                 | plate resistance .....                    | 14          |
| phase-inverter .....                  | 51                 | power output .....                        | 29, 35      |
| preamplifier circuits ..              | 698, 699, 700, 701 | power sensitivity .....                   | 14          |
| push-pull .....                       | 25, 28, 31         | Q (selectivity) .....                     | 52          |
| radio-frequency .....                 | 25, 52             | resonant frequency .....                  | 52          |
| remote-cutoff .....                   | 27, 56             | screen-grid voltage dropping resistor     | 99          |
| resistance-coupled .....              | 26                 | transconductance .....                    | 14, 41      |
| sync .....                            | 63                 | voltage amplification (gain) .....        | 26, 40      |
| television .....                      | 56                 | Capacitive Division .....                 | 54          |
| tone-control .....                    | 45                 | Capacitor-Input Filter .....              | 89          |
| tone-control, circuit .....           | 702                | Cathode:                                  |             |
| video .....                           | 58, 60             | bias .....                                | 84          |
| voltage .....                         | 25                 | bypassing .....                           | 84          |
| volume-expander .....                 | 50                 | connection .....                          | 83          |
| Amplifiers:                           |                    | current .....                             | 83          |
| if .....                              | 52                 | directly heated .....                     | 3           |
| tuned .....                           | 52                 | drive .....                               | 37          |
| wideband .....                        | 58                 | follower .....                            | 38, 40      |
| Amplitude Modulation (AM) .....       | 19                 | indirectly heated .....                   | 4           |
| Anode .....                           | 5                  | ionic-heated .....                        | 6           |
| Application Guide for RCA             |                    | resistor .....                            | 84          |
| Receiving Tubes .....                 | 104                | types .....                               | 3           |
| Arc-Back Limit .....                  | 97                 | Characteristics Curves, Interpretation of | 98          |
| Audio Mixer .....                     | 696                | Characteristics:                          |             |
| Electronic Volt-Ohmmeter .....        | 703                | amplification factor .....                | 13          |
| Automatic Frequency Control (AFC) ..  | 76                 | control-grid-plate transconductance ..    | 14          |
| Automatic Gain Control (AGC) .....    | 46, 48             | conversion transconductance .....         | 14          |
| Automatic Volume Control (AVC) .....  | 46                 | dynamic .....                             | 13          |
| Bass and Treble Tone-Control          |                    | picture tube X-radiation .....            | 14          |
| Amplifier Stage .....                 | 702                | plate resistance .....                    | 14          |
| Beam Power Tubes .....                | 9                  | static .....                              | 13          |



|  | Page |   | Page   |
|--|------|---|--------|
| Charts and Tables:   |      | Current:  |        |
| grid-No. 2 input rating chart . . . . .  | 300  | cathode . . . . .                                   | 83     |
| outline drawings . . . . .   | 632  | dc output . . . . .                                 | 96     |
| picture tube characteristics chart . . . . .   | 662  | grid . . . . .                                      | 86     |
| resistance-coupled amplifier . . . . .   | 639  | peak plate . . . . .                                | 75     |
| types for replacement use . . . . .  | 522  | plate . . . . .                                     | 5      |
| Choke-Input Filter . . . . .   | 89   | Curves, Interpretation of Characteristic . . . . .  | 98     |
| Chroma Circuits . . . . .  | 737  | Cutoff . . . . .                                    | 27     |
| Chrominance Channel . . . . .  | 61   |   |        |
| Circuit Diagram of:  |      | Dark Heater . . . . .                               | 4      |
| ac/dc superheterodyne radio receiver . . . . .   | 673  | Deflection Circuits:                                |        |
| all-purpose power supplies . . . . .   | 707  | horizontal . . . . .                                | 67     |
| AM/FM superheterodyne radio receiver . . . . .   | 673  | vertical . . . . .                                  | 68     |
| bass and treble tone-control amplifier . . . . .   | 702  | Degeneration (See Inverse Feedback) . . . . .       | 38     |
| chroma circuits . . . . .  | 737  | Delayed Automatic Volume Control (DAVC) . . . . .   | 47     |
| code practice oscillator . . . . .   | 686  | Demodulation . . . . .                              | 19, 72 |
| FM stereo multiplex adapter . . . . .  | 682  | Design-Center System of Ratings . . . . .           | 95     |
| FM tuner . . . . .   | 678  | Design-Maximum System of Ratings . . . . .          | 95     |
| high-fidelity, 15-w audio amplifier . . . . .  | 688  | Detection:  |        |
| high-fidelity, 30-w audio amplifier . . . . .  | 690  | AM . . . . .  | 19     |
| high-fidelity, 50-w audio amplifier . . . . .  | 692  | diode . . . . .                                     | 20     |
| horizontal-deflection circuit and high-power supply (for color TV receiver) . . . . .                  | 731  | discriminator . . . . .                             | 23     |
| intercommunication set . . . . .   | 687  | FM . . . . .  | 22     |
| low-distortion preamplifier . . . . .  | 701  | grid bias . . . . .                                 | 21     |
| low-voltage and heater supply (for TV receiver) . . . . .  | 720  | grid resistor and capacitor . . . . .               | 22     |
| low-voltage power supply, degaussing circuit, and heater connections (for color TV receiver) . . . . . | 722  | ratio detector . . . . .                            | 24     |
| microphone and phonograph amplifier . . . . .  | 695  | synchronous . . . . .                               | 72     |
| phonograph amplifier . . . . .   | 697  | Diode:  |        |
| picture tube and associated circuits (for color TV receiver) . . . . .                                 | 741  | biasing . . . . .                                   | 21     |
| preamplifier for amateur receiver . . . . .  | 690  | considerations . . . . .                            | 5      |
| preamplifier for ceramic phonograph-pickup . . . . .   | 700  | detection . . . . .                                 | 20     |
| preamplifier for magnetic phonograph-pickup . . . . .  | 698  | Discriminator . . . . .                             | 23     |
| preamplifier for tape-head pickup . . . . .  | 699  | Dress of Circuit Leads . . . . .                    | 88     |
| sync, agc, and vertical-deflection circuits (for color TV receiver) . . . . .                          | 731  | Dynamic Characteristics . . . . .                   | 13     |
| three-stage if amplifier/limiter and ratio detector . . . . .  | 680  |   |        |
| two-channel audio mixer . . . . .  | 696  | Electron:   |        |
| two-channel, 1-w stereo amplifier . . . . .  | 694  | considerations . . . . .                            | 3      |
| vertical and horizontal deflection circuits and high-voltage rectifier . . . . .                       | 716  | secondary . . . . .                                 | 8, 9   |
| vhf. tuner . . . . .   | 709  | Electrons, Electrodes, and Electron Tubes . . . . . | 3      |
| video, agc, and sync amplifiers . . . . .  | 714  | Electron Tube Application . . . . .                 | 15     |
| video and sound-channel circuits (for color TV receiver) . . . . .                                     | 727  | Electron Tube Characteristics . . . . .             | 13     |
| video if amplifiers and sound-channel circuits . . . . .   | 712  | Electron Tube Installation . . . . .                | 81     |
| Circuits . . . . .   | 670  | Electron Tube Testing . . . . .                     | 100    |
| Code-Practice Oscillator . . . . .   | 684  | Electron-Ray Tubes . . . . .                        | 79     |
| Color Demodulation . . . . .   | 72   | Emission:   |        |
| Color Picture Tubes . . . . .  | 12   | current . . . . .                                   | 5      |
| Color Television . . . . .   | 60   | secondary . . . . .                                 | 8, 9   |
| Communications Transceiver . . . . .   | 16   | test . . . . .                                      | 101    |
| Contact Potential . . . . .  | 86   | Feedback, Inverse . . . . .                         | 25, 38 |
| Conversion Nomograph, Use of . . . . .   | 33   | Filament (also see Heater and Cathode):             |        |
| Conversion Transconductance . . . . .  | 14   | operation . . . . .                                 | 3, 81  |
| Corrective Filter . . . . .  | 43   | resistor . . . . .                                  | 81     |
| Cross-Modulation . . . . .   | 27   | series operation . . . . .                          | 81     |
|  |      | shunt resistor . . . . .                            | 82     |
|  |      | supply voltage . . . . .                            | 81     |
|  |      | Filter:   |        |
|  |      | capacitor-input . . . . .                           | 89     |
|  |      | choke-input . . . . .                               | 89     |
|  |      | corrective . . . . .                                | 43     |
|  |      | radio-frequency . . . . .                           | 89     |
|  |      | smoothing . . . . .                                 | 89     |
|  |      | FM Detection . . . . .                              | 22     |
|  |      | FM Stereo Multiplex Adapter . . . . .               | 682    |
|  |      | FM Tuner . . . . .                                  | 678    |
|  |      | Formulas (see Calculation)                          |        |

|  | Page   |  | Page |
|--|--------|--|------|
| Frame Grid .....   | 7      | Low-Voltage Power Supply, Degaussing<br>Circuit, and Heater Connections (for<br>Color TV Receiver) ..... | 722  |
| Frequency Conversion .....   | 77     | Luminance Amplifier .....  | 60   |
| Frequency Modulation (FM) .....  | 22     |  |      |
| Full-Wave Rectifier .....  | 5, 17  | Maximum Ratings .....  | 95   |
| Gain (Voltage Amplification) .....                                       | 26     | Mercury-Vapor Rectifier:<br>considerations .....   | 6    |
| General System Functions .....   | 15     | interference from .....  | 89   |
| Generic Tube Types .....   | 4      | Mho-micromho .....   | 14   |
| Grid:  |        | Microphone and Phonograph Amplifier ..   | 695  |
| bias .....   | 85     | Mixer:   |      |
| bias detection .....   | 21     | audio .....  | 696  |
| control .....  | 7      | hexode .....   | 79   |
| current .....  | 86     | pentagrid .....  | 74   |
| resistor .....   | 85     | vhf tuner .....  | 56   |
| resistor and capacitor detection ..                                      | 22     | Modulated Wave .....   | 19   |
| screen .....   | 7      | Modulation .....   | 19   |
| suppressor .....   | 8      | Modulation-Distortion .....  | 27   |
| voltage supply .....   | 83     | Multi-Electrode and Multi-Unit Tubes ..  | 9    |
| Grid-Plate Capacitance .....   | 7      | Multiplex Adapter for FM Stereo .....  | 682  |
| Grid-Plate Transconductance .....  | 14     | Multivibrator .....  | 74   |
| Half-Wave Rectifier .....  | 5, 17  |  |      |
| Harmonic Distortion .....  | 30, 49 | Noise .....  | 54   |
| Heater:  |        | Noise Figure .....   | 55   |
| cathode .....  | 4      | Noise Immunity .....   | 67   |
| cathode bias .....   | 83     | Novar .....  | 10   |
| cathode connection .....   | 83     | Nuvistor .....   | 10   |
| resistor .....   | 82     |  |      |
| series operation .....   | 82     | Operation, Typical Values .....  | 98   |
| supply voltage .....   | 81     | Oscillator:  |      |
| warm-up time .....   | 95     | considerations .....   | 74   |
| High-Fidelity Amplifiers .....   | 49, 90 | local .....  | 57   |
| High-Fidelity, 15-w Audio Amplifier ..                                   | 688    | multivibrator .....  | 75   |
| High-Fidelity, 30-w Audio Amplifier ..                                   | 690    | relaxation .....   | 75   |
| High-Fidelity, 50-w Audio Amplifier ..                                   | 692    | synchroguide .....   | 75   |
| High-Voltage Regulation .....  | 69     | Output Capacitance .....   | 98   |
| High-Voltage Regulators:   |        | Output-Coupling Devices .....  | 90   |
| Shunt Regulator Circuit .....  | 69     |  |      |
| Pulse Regulator Circuit .....  | 70     | Parallel Operation .....   | 28   |
| Horizontal Deflection .....  | 66     | Peaking:   |      |
| Horizontal-Deflection Circuit and High-<br>Voltage Power Supply .....    | 733    | series .....   | 58   |
| Hum and Noise Characteristics .....                                      | 98     | shunt .....  | 58   |
| IF Amplifier/Limiter and Ratio Detector                                  | 680    | Peak heater-cathode voltage .....  | 96   |
| Impedance, Input .....   | 27     | Peak Inverse Plate Voltage .....   | 97   |
| Injection Voltage .....  | 56     | Peak Plate Current .....   | 97   |
| Input Admittance .....   | 27     | Pentagrid Converter .....  | 10   |
| Input Capacitance .....  | 98     | Pentagrid Mixer .....  | 79   |
| Instantaneous Peak Voltage .....   | 97     | Pentode Considerations .....   | 8    |
| Intercommunication Set .....   | 685    | Phase Inverter .....   | 51   |
| Interelectrode Capacitances .....  | 7, 98  | Phonograph Amplifier .....   | 697  |
| Intermodulation Distortion .....   | 49     | Phonograph and Tape Preamplifiers ..   | 43   |
| Interpretation of Tube Data .....  | 95     | Picture Tube:  |      |
| Inverse Feedback:  |        | characteristics chart .....  | 662  |
| constant-current type .....  | 40     | corona considerations .....  | 92   |
| constant-voltage type .....  | 38     | cutaway view of color tube .....   | 12   |
| Kinescopes .....   | 10     | deflection .....   | 11   |
|  |        | dust considerations .....  | 91   |
| Limiters .....   | 50     | essential elements .....   | 10   |
| Load resistance .....  | 31     | handling precautions .....   | 94   |
| Local Oscillator .....   | 57     | high-voltage considerations .....  | 94   |
| Low-Distortion preamplifier .....  | 701    | humidity considerations .....  | 91   |
| Low-Voltage and Heater Supply (for<br>Black-and-White TV receiver) ..... | 720    | safety considerations .....  | 94   |
|  |        | screen .....   | 10   |
|  |        | structure .....  | 11   |
|  |        | X-ray radiation precautions .....  | 94   |

|   | Page    |   | Page       |
|---|---------|---|------------|
| Picture Tube and Associated Circuits<br>(for Color TV Receiver) ..... | 741     | Shielding .....   | 87         |
| Plate:  |         | Shock-Hazard Warning:   |            |
| current .....   | 5       | picture tubes .....   | 94         |
| dissipation .....   | 96      | receiving tubes .....   | 93         |
| efficiency .....  | 14      | Short-Circuit Test .....  | 100        |
| load .....  | 22      | Shunt Regulator Circuit .....   | 69         |
| resistance .....  | 13      | Signal Generator .....  | 730        |
| voltage supply .....  | 83      | Signal-to-Noise Ratio .....   | 54         |
| Plate-Cathode Capacitance .....                                       | 7, 98   | Space Charge .....  | 6, 9       |
| Power Output:   |         | Static Characteristics .....  | 13         |
| calculations .....  | 29      | Stereo Circuits .....   | 682, 694   |
| Power Sensitivity .....   | 14      | Superheterodyne Receiver (ac/dc) .....  | 671        |
| Power Supplies .....  | 707     | Suppressor Grid (Grid No.3) .....   | 8          |
| Preamplifier for Amateur Receiver .....                               | 684     | Sync .....  | 64         |
| Preamplifier for Ceramic Phonograph<br>Pickup .....                   | 700     | Sync, AGC, and Vertical-Deflection<br>Circuits .....                            | 731        |
| Preamplifier for Magnetic Phonograph<br>Pickup .....                  | 698     | Sync Circuits .....   | 64         |
| Preamplifier for Tape-Head Pickup .....                               | 699     | Sync Separator .....  | 63         |
| Preamplifiers, Phonograph and Tape .....                              | 43      | Synchroguide .....  | 75         |
| Pulse Regulator Circuit .....   | 70      | Synchronous Detection .....   | 73         |
| Push-Pull Operation .....   | 28, 31  |   |            |
| <b>Q</b> (selectivity) .....  | 52      | Technical Data for Tube Types .....   | 111        |
|   |         | Television:   |            |
| Radio-Frequency:  |         | color demodulation .....  | 72         |
| amplifier .....   | 25, 52  | horizontal deflection .....   | 66         |
| filter .....  | 89      | if amplifiers .....   | 57         |
| Radio Receiver .....  | 15      | picture tubes .....   | 10, 91, 94 |
| Ratings:  |         | receiver .....  | 16         |
| absolute-maximum system .....   | 95      | rf amplifiers .....   | 56         |
| design-center system .....  | 95      | scanning .....  | 83         |
| design-maximum system .....   | 95      | sync circuits .....   | 64         |
| Ratio Detector .....  | 24      | vertical deflection .....   | 68         |
| Rectification .....   | 17      | Terminal Diagrams:  |            |
| Rectifiers:   |         | For Picture Tubes .....   | 668        |
| full-wave .....   | 5, 17   | For Replacement and Discontinued<br>Types .....                                 | 612        |
| half-wave .....   | 5, 17   | Testing Electron Tubes .....  | 100        |
| ionic-heated cathode .....  | 6       | Tetrode Considerations .....  | 7          |
| parallel operation of .....   | 18      | Three-Stage IF Amplifier/Limiter<br>and Ratio Detector .....                    | 678        |
| plate-characteristics curves .....                                    | 98      | Tone-Control Amplifier Stage .....  | 729        |
| voltage doubler .....   | 18      | Tone Control .....  | 45         |
| Relaxation Oscillator .....   | 75      | Transconductance:   |            |
| Remote-Cutoff Tubes .....   | 27      | conversion .....  | 14         |
| Resistance-Coupled Amplifiers .....                                   | 26, 639 | grid-plate .....  | 14         |
| Resistance Coupling .....   | 26      | test .....  | 101        |
| Resistor:   |         | Triode Considerations .....   | 7          |
| cathode (self-biasing) .....  | 84      | Tube:   |            |
| center tap .....  | 82      | outlines .....  | 634        |
| filament .....  | 82      | ratings, interpretation of .....  | 95         |
| plate load .....  | 31      | tester requirements .....   | 103        |
| screen-grid .....   | 85, 99  | Tube Types, Technical Data .....  | 112        |
| Resonant Circuits .....   | 52      | Tuned Amplifiers .....  | 52         |
| Safety Precautions:   |         | Tuner, FM .....   | 678        |
| picture tubes .....   | 94      | Tuners, Television .....  | 56         |
| receiving tubes .....   | 93      | Tuning Indicators .....   | 79         |
| Saturation Current .....  | 6       | TV Scanning, Sync, and Deflection .....   | 61         |
| Scanning Fundamentals .....   | 63      | Twin diode—triode .....   | 20         |
| Screen Grid (Grid No.2):  |         | Two-Channel Audio Mixer .....   | 696        |
| considerations .....  | 7       | Two-Channel Stereophonic Amplifier .....  | 694        |
| input .....   | 99      | Typical Operation Values,<br>Interpretation of .....                            | 98         |
| input rating chart .....  | 300     |   |            |
| voltage supply .....  | 86      | Vertical and Horizontal Deflection<br>Circuits and High Voltage Rectifier ..... | 716        |
| Secondary Electrons .....   | 8, 9    | Vertical Deflection .....   | 68         |
| Secondary Emission .....  | 8       | VHF Tuner .....   | 736, 751   |
| Selectivity (Q) .....   | 52      | Video, AGC, and Sync Amplifier .....  | 714        |
| Self Bias (cathode bias) .....  | 84      |   |            |

|   | <i>Page</i> |                                       | <i>Page</i> |
|---|-------------|---------------------------------------|-------------|
| Video Amplifiers .....                                  | 58, 60      | by screen-grid-voltage variation .... | 87          |
| Video IF Amplifiers and Sound-Channel<br>Circuits ..... | 727         | delayed automatic (DAVC) .....        | 47          |
| Voltage:  |             | Voltage Doubler .....                 | 18          |
| amplification, class A .....                            | 15          | Volume Compressor and Expander ....   | 50          |
| doubler rectifier .....                                 | 18          |                                       |             |
| peak heater-cathode .....                               | 96          | Wideband (Video)                      |             |
| peak inverse plate .....                                | 97          | Amplifiers .....                      | 58          |
| supply .....  | 83          |                                       |             |
| Volume Control:   |             | X-Ray Radiation Considerations:       |             |
| automatic (AVC) .....                                   | 46          | picture tubes .....                   | 94          |
| by grid-voltage variation .....                         | 85          | receiving tubes .....                 | 93          |

## RCA TECHNICAL PUBLICATIONS

**Color-TV Troubleshooting PICT-O-GUIDE-1A1389.** Contains basic information vital for understanding and servicing color television receivers. Illustrated with over one hundred full-color photographs, the guide features a lie-flat binding for easy reference. Sections include: Learning to Mix Color, Compatible Color TV, Receiver Set Up, What the Operating Controls Do, Using Color Test Equipment, Using the Green Stripe Test Signal, Troubleshooting Black-and-White Defects Unique to Color Receivers, AFPC Checks and Adjustments, When to Install a New Color Picture Tube, Servicing Techniques, and If the Receiver Needs Alignment, Optional Price \$6.75°.

**Field Service Guides for RCA Color-TV Receivers—ERT-200, ERT-201, ERT-202, and ERT-203.** The four guides cover chassis CTC-2-CTC-20, CTC-20-CTC-35, CTC-22-CTC-40, and CTC-39X-CTC-55, respectively. These guides are compact enough to fit into your service caddy; however, they open to a full 11" x 17" for clear, easy reference. Included in each guide are comprehensive indexes, step-by-step setup procedures, top and rear chassis views, easy-to-read schematic diagrams, and procedures for picture tube removal and replacement. Optional Price \$2.00° (ERT-200), \$1.60° (ERT-201), \$1.90° (ERT-202), \$2.90° (ERT-203).

**Color-TV Service Handbooks for Major Manufacturers-1A1759, 1A1848, and 1A1973.** The three handbooks cover receiver model years 1967-1968, 1969-1970, and 1971-1972, respectively. Data in the handbooks are based on the original manufacturer's service notes and allow you to service receivers of many major color-TV manufacturers in the customer's home. Included in the handbooks are manufacturers such as: Admiral, Airline, Curtis Mathes, Dumont, Emerson, General Electric, Hitachi, Hoffman, Magnavox, Motorola, Olympic, Packard Bell, Panasonic, Philco, RCA, Silvertone, Sony, Sylvania, and Zenith. Each handbook contains: top chassis views showing all major components, comprehensive indexes, and simplified setup procedures for purity, black-and-white setup, convergence, and AFPC. Optional Price 2.00° (1A1759), \$2.25° (1A1848), and \$2.95° (1A1973).

**Solid State Servicing-TSG-1673A.** A practical bench-oriented service manual covering the application and servicing of solid-state devices (diodes: rectifiers-zeners-varactors; transistors: bipolar-FET's; thyristors: SCR's-triacs, IC's) in power supplies, hi-fi and tape-recorder amplifiers; AM and FM receivers (mono and stereo); and television receivers (color and black-and-white). Optional Price \$3.95°.

**Solid State Hobby Circuits Manual-HM-91.** Contains complete construction on 62 circuits of general interest to all experimenters. Circuits use diodes, transistors, SCR's, triacs, MOS transistors, integrated circuits, and light and heat detectors. Circuit operation is described in detail; construction layouts, photographs, schematic diagrams, and parts lists are given; and full size drilling or printed-circuit templates are included for most circuits to simplify construction. Optional Price \$1.95°.

**Transistor, Thyristor, and Diode Manual—SC-15.** A comprehensive manual covering transistors (bipolar-FET's), thyristors (triacs-diacs-SCR's), silicon rectifiers, and other semiconductor diodes. Technical data is presented for over 100 solid-state devices. Included is a section describing 35 circuits with parts lists and writeups of functions and operation. Optional Price \$2.50°.

**Photomultiplier Manual—PT-61.** Contains information on photomultiplier construction, operation and applications for designers and users of electro-optical equipment, data on sources, spectra, noise, and RCA photomultipliers are included. Well illustrated and well written for easy reading, this manual is valuable to both student and engineer. Optional Price \$2.50°.

**Electron Tube Data Service—HB-3DS.** This new data service will provide quarterly mailings containing, full size (8 $\frac{3}{4}$ " x 10 $\frac{1}{2}$ " data booklets on new RCA electron tubes and associated components, both commercial and developmental, as well as new Application Notes. Product lines not included in the original RCA Electron Tube Handbook, such as Lasers, are included in this new data service. User oriented, this data service does not require special binders or filing instructions. You can use any standard 3-ring binder and file in any fashion that meets your needs. Product lines covered include: Camera Tubes, Display Tubes, Lasers, Picture Tubes, Receiving Tubes, Image Tubes, Microwave Devices, Photodetectors, and Power Tubes. Optional Price \$8.50° (USA) \$10.00° (Foreign).

° Prices are net and are subject to change without notice at our discretion.

## OTHER ELECTRONIC COMPONENTS' PRODUCTS

**REPLACEMENT SEMICONDUCTOR DEVICES—SK-SERIES**—The RCA SK-Series replacement devices are engineered, manufactured, and tested for use specifically as replacements for semiconductor devices designed into original equipment. This line of replacement devices include transistors, rectifiers, diodes, thyristors, and integrated circuits. In most cases, the recommended SK-Series replacement transistor, rectifier, thyristor, or integrated circuit can be installed without changes in mechanical mounting arrangements, circuit wiring, or operating conditions.

The SK-Series replacement program is composed of devices for use as replacements in entertainment and industrial type equipment. These SK-Series devices replace USA industry standard EIA types, foreign types, and types identified only by device-manufacturers' or equipment-manufacturers' parts numbers.

Replacement information is given in the SK Series Top-of-the-Line Replacement Guide, SPG-202. It contains over 51,000 semiconductor devices cross referenced to SK-Series replacement semiconductors. Copies of the SPG-202 may be obtained from your RCA distributor or by writing to RCA Commercial Engineering, Harrison, New Jersey 07029.

Experimenter's kits and integrated circuit project kits are also available through your RCA distributor. These kits are described in the Experimenter's Kits brochure 1Li350B.

**BATTERIES**—Some battery systems are better than others . . . for your specific needs. RCA has three primary battery systems each with particular cost/performance values for specific applications. The right RCA battery system depends on the characteristics you desire. That is, how long you want your battery-operated device to sustain its level of performance and how often you can conveniently replace the battery.

**Carbon Zinc**—These batteries have low initial cost and provide good service life. Three different electro-chemical mixes are available: flashlight mix, photoflash mix, and radio mix.

**Alkaline-Primary**—Moderate initial cost, longer service life, and higher current capability than comparable carbon-zinc cells make these batteries well suited for longer uninterrupted service in higher-current-drain applications such as tape recorders, cameras, and toys. Alkaline batteries also provide better service in cold weather than standard carbon-zinc batteries.

**Mercury**—Providing the longest service life of the primary systems in low current drain applications, mercury batteries also have higher initial cost. They are especially useful in applications where constant output voltage and protection from electrolyte leakage is important.


Comprehensive technical data are contained in the RCA Battery Manual BDG-111B. It's available through your RCA distributor or by writing to Commercial Engineering, Harrison, New Jersey 07029.

**MAGNETIC TAPE**—Red Seal Cassettes, Vibrant Cassettes, 8-Track Tape, and Reel-to-Reel Tape. Technical data are contained in the RCA Audio Recording Tapes brochure 1T1182B available through your RCA distributor or by writing to Commercial Engineering, Harrison, New Jersey 07029.


**INDUSTRIAL TUBES**—Display Tubes (Digital and CRT and Storage); Lasers (Gas, Solid State, and IR Emitters); Microwave Devices (Solid State, Penicil Tube, and Traveling Wave); Photodetectors (Phototube and Solid State); Power Tubes (Regular and Large); Camera Tubes; and Image Tubes.

**ELECTRONIC INSTRUMENTS**—For service, industry, schools, and laboratories. V.O-M's; Electronic Multimeters; Sound-Meter; Oscilloscopes; AC "Clamp Tester"; AF, RF, TV Generators; Color-Bar Generators; Transistor, Picture-Tube Testers, Isolation Transformer; Power Supplies.


For a complete, free catalog, write RCA Electronic Instruments, Harrison, New Jersey 07029.



Dual-Mode  
Oscilloscope



Dynamic  
Transistor/FET Tester



CR III Picture Tube  
Tester



Picoammeter



