

# LAFAYETTE

RADIO  
ELECTRONICS

**SPECIAL! SALE**  
MID-SUMMER

CATALOG 615



NO MONEY DOWN!



NO LICENSES,  
TESTS  
OR AGE  
LIMITS

HUNTERS  
CAMPER'S BOATING  
SPORTS

**BRAND NEW!  
TRANSISTORIZED  
'BULL  
HORN'**

- Weighs only 2½ lbs. • Long Range Calling • Completely Transistorized
- Can be Used as Long-Range Listening Device


Considered the most modern development in bull horns because it is completely transistorized—instantly operates on 6 standard 1½V. "C" flashlight batteries (not incl.). With its long range, it is ideal for all outdoorsmen, for work or sports. Trigger switch is simple to operate—just press to talk. May be used as a sound detector and amplifier as well as a voice amplifier. Shpg. wt., 3 lbs. PA-271 Net 10.99

BA-156 1.5 Volt Batteries (6 req.) Net ea., .13



ONLY  
**10<sup>99</sup>**

NO MONEY DOWN!

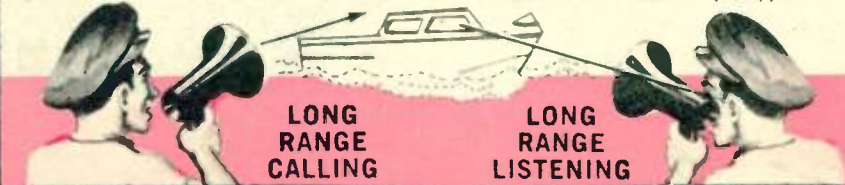

LONG RANGE CALLING

LONG RANGE LISTENING

**9 TRANSISTOR  
CITIZENS BAND "WALKIE TALKIE"**

Complete with  
LEATHER CASE,  
EARPHONE,  
ANTENNA  
& BATTERIES

ONLY

**42<sup>95</sup>**  
2 for 79<sup>95</sup>



- Transmits & Receives Up to 7 Miles (Under Favorable Conditions) • Crystal Control on Both Transmit & Receive • Leather Case with Shoulder Strap • Requires 8 Inexpensive Penlight Batteries • Up to 70 Hours Battery Life • 46" Telescoping Antenna
- Push-to-Talk Operation • Earphone For Personal Listening

No License or Permit Required—Complete portable two-way communications for everyone, everywhere. Perfect for hunting, fishing, boating, virtually all sports; use at work in construction, warehouse, office, on the farm or for in plant communications. Receives and transmits up to 7 miles under favorable conditions (such as over water or flat terrain) or 1.5 miles under average conditions (no intervening obstructions.)

As simple and easy to use as your telephone and twice as handy—weighs only 18 ounces and slips easily into your pocket. Just two controls provide fast, efficient operation, on/off volume and push-to-talk. When push-to-talk button is depressed for transmitting the built-in-speaker acts as a sensitive microphone. Private monitoring of conversation is made possible by means of a special jack and earphone. Telescoping antenna extends to 46 inches.

Constructed with the care and precision of a fine watch, this new Lafayette Citizens Band "Walkie Talkie" achieves optimum reliability and performance by use of sophisticated transistor techniques and advanced design. Full transistor circuitry employs 9 transistors plus 1 diode. Transmitter section is crystal controlled and delivers a power input of 100 milliwatts, meeting FCC specifications for unlicensed units in the 27mc Citizens Band spectrum. Crisp-clear reception is furnished by the efficient superheterodyne receiver. Power is supplied by 8 miniature standard penlight batteries with a life expectancy of up to 70 hours.

Housed in a handsome black and gold aluminum case with leather carrying case and shoulder strap. Supplied with earphone, antenna, batteries and crystals for channel 10. Size: 6½x3¼x1½". Shpg. wt., 3 lbs.

HE-29 Set of 2 Net 42.95 Net 79.95

Replacement Batteries for HE-29 "Walkie-Talkie," 8 required.

BA-155 8 Cells Net each .095

**"MIGHTY 9"**

the MOST POWERFUL

**9 TRANSISTOR  
PORTABLE**

LIGHTWEIGHT ONLY 9 OZS.

**26<sup>95</sup>**

SHIRT  
POCKET  
SIZE



NO MONEY DOWN!

- PLAYS FOR HOURS ON 2 MOST INEXPENSIVE BATTERIES.
  - SEPARATE MIXER AND OSCILLATOR • 4 AUDIO STAGES • 2 DIODES
  - AVC AMPLIFIER • FULL-TONE SPEAKER • 2 IF STAGES
- Compare this portable with others selling for twice as much. Inside the sturdy, attractive plastic case you'll find an engineer's dream—separate mixer and oscillator, diode detector and diode bias stabilizer, 2 IF stages, AVC amplifier, 4 audio stages including push-pull audio output. Lightweight (only 9 ozs.), pocket size (4½x3Wx1¼"D.) self-contained stand. Operates on two of the most inexpensive "Z" cell batteries—plays for hours and hours. Complete with leather carrying case, batteries and earphone for private listening. Shpg. wt., 2 lbs. FS-91 Net 26.95



Complete with  
Carrying Case  
Earphone and Batteries

BA-155 (Burgess Z type battery 2 required) Net each .095

**NOW! NO MONEY DOWN when you use Lafayette's NEW EASY-PAY PLAN!**

DISREGARD ALL THE DOWN PAYMENTS LISTED IN THIS BOOK OR ANY OTHER LAFAYETTE CATALOG  
NO DOWN PAYMENT with the NEW Lafayette EASY-PAY PLAN — See Page 54 for Complete Details.

NEW YORK 13, N. Y.  
100 6th Avenue  
WOrth 6-5300  
Open THUR.  
'til 8:45 P.M.  
Except during  
July & August

BRONX 58, N. Y.  
542 E. Fordham Rd.  
FOrdham 7-8813  
Open THUR.  
'til 8:45 P.M.  
Except during  
July & August

BOSTON 10, MASS.  
110 Federal Street  
HUBbard 2-7850  
Open MON. &  
WED. 'til 8:45

**LAFAYETTE  
RADIO**

**MAIL ORDER  
AND SALES CENTER**

165-08 LIBERTY AVENUE, JAMAICA 33, N. Y.  
AXtel 1-7000 OPEN MON. and FRI. 'TIL 8:45 P.M.

During July & August, Friday only

NEWARK 2, N. J.  
24 Central Avenue  
MARket 2-1661

Open WED.  
'til 8:45

PLAINFIELD, N. J.  
139 W. 2nd Street  
PLainfield 6-4718

Open THUR.  
'til 8:45 P.M.

PARAMUS, N. J.  
182 Route 17  
COllfax 1-8800

OPEN MON., WED.  
& FRI. 'TIL 8:45

BEL AIR, MD.  
139 Thomas St.

TAMPA, FLA.  
3328 Henderson Blvd.

ORDER BLANK Pg. 53

ASBURY PARK, N.J.  
1027 Highway No. 35

CAMDEN, N. J.  
305 Broadway

DENVER, COLO.  
1455 So. Sheridan Blvd.

**LAFAYETTE RADIO ELECTRONICS "ASSOCIATE STORE" DEALER LOCATIONS**

Lafayette Radio Electronics "Associate Store" Dealers own and operate their own stores as independent franchised dealers. They establish their own terms and prices, which may vary slightly, and do not handle mail orders.

TRENTON, N.J.  
229 South Warren St.

BRIDGEPORT, CONN.  
2710 Fairfield Ave.

GROTON, CONN.  
171 Thames St.

STAMFORD, CONN.  
85 Prospect St.

WATERBURY, CONN.  
386 West Main St.

ALBANY, N. Y.  
335 Central Ave.

ROCHESTER, N. Y.  
792 W. Main St.

AKRON, OHIO  
34 North Main


CLEVELAND, OHIO  
2001 Euclid Ave.

HARRISBURG, PA.  
1419 No. 3rd St.

PITTSBURGH, PA.  
640 Grant St.

MAIL ORDERS NOT FILLED BY "ASSOCIATE STORE" DEALERS

# LAFAYETTE FM AM TABLE RADIO

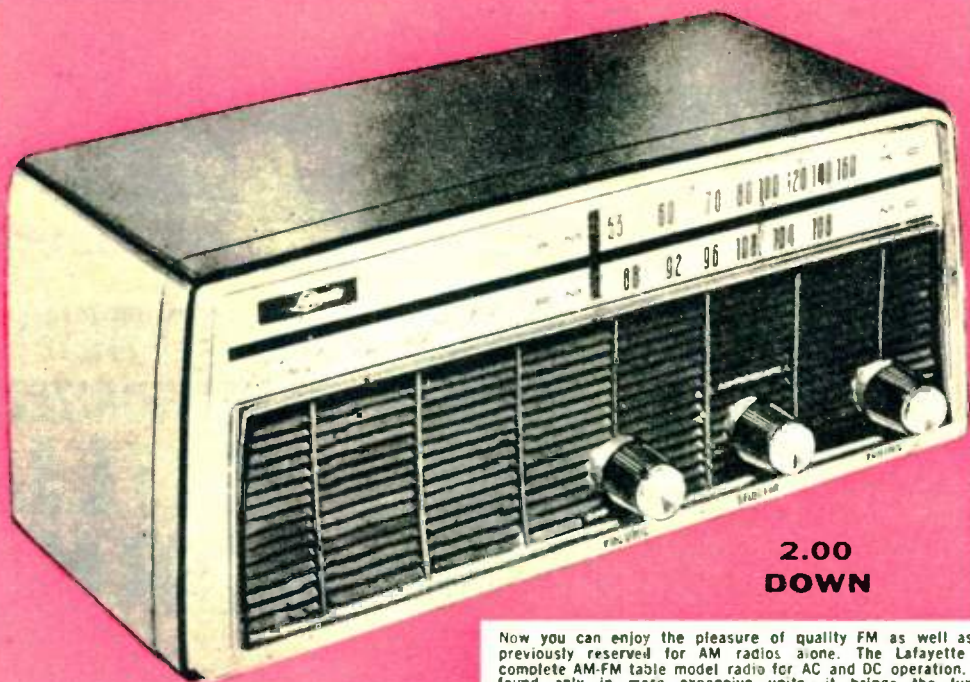

**2.00  
DOWN**

Now you can enjoy the pleasure of quality FM as well as AM radio at a price previously reserved for AM radios alone. The Lafayette "Symphonette" is a complete AM-FM table model radio for AC and DC operation. Incorporating features found only in more expensive units, it brings the luxury of FM reception right to your fingertips. Automatic Frequency Control, utilizing effective triode circuitry, assures drift-free FM operation. Lock-in of FM stations eliminates annoying retuning and adds to your listening pleasure. Automatic volume Control softens any sudden blasts of volume and makes tuning stations of different levels a cinch. A supersensitive AM tuned-antenna brings in stations clearly

while reducing unwanted noise. An FM antenna is provided for to assure all the benefits of clear, pure tone. The 4" PM speaker produces rich sound from low to high range to enhance your music-listening pleasure. A stylish polished plastic cabinet, in distinct, contrasting black and white, has an easy to read slide dial for AM and FM bands. Contains 7 tubes, 2 diodes, and 1 selenium rectifier for 12 tube power-packed performance. A receptacle on the rear of the radio allows quick addition of a second speaker. For 117 volts; 60 cps AC or DC. Size 10" wide, 5" deep, 5 1/4" high. Shpg. wt., 5 lbs. Net 29.50 FS-221

## NEW! "SYMPHONETTE" LAFAYETTE DOES IT AGAIN

NEVER BEFORE HAS SUCH HIGH QUALITY BEEN OFFERED  
AT SUCH A LOW PRICE


- 12 Tube Performance — 7-Tubes (4 Dual Purpose), 2-Diodes, 1-Rectifier

**JUST  
COMPARE  
29.50**

- Lock-In Automatic Frequency Control
- 2 Super-Sensitive Built-In Antennas
- Provision For External Speaker
- For AC or DC
- Streamline Design Cabinet
- Automatic Volume Control
- 4 Inch PM Speaker
- Outstanding Listening Pleasure

## NEW! POWERFUL!

# 9 TRANSISTOR FM/AM PORTABLE RADIO NOW HAVE HI-FI Wherever You Go!

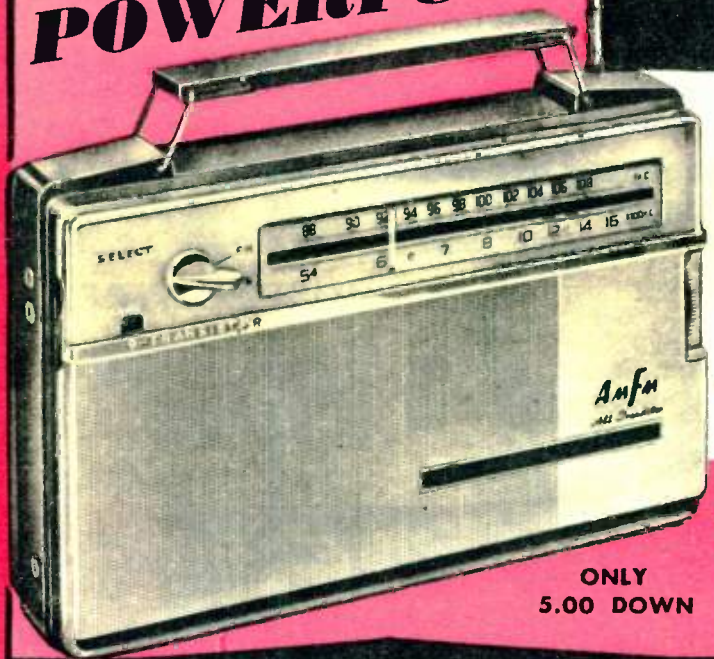

**ONLY  
5.00 DOWN**



**ONLY  
69.95**

- Full FM and AM Broadcast Bands
- 2 Antennas
- 2 Antenna Extension Jacks
- 3 Outputs—Speaker, Ear-phone and Tuner
- Operates on 4 Inexpensive Flashlight Batteries
- 9-Transistor Superheterodyne Circuit



Now you can have all the advantages of a portable radio with all the power of a console . . . at a price lower than you expect. A wonderful combination of advanced technique and design in an extremely efficient 9-transistor AM and FM portable radio. Features a tuner output that converts this portable to a transistorized AM/FM tuner—real hi-fi. Other highlights include speaker output, ear-phone output for private listening, separate AM and FM antenna extension jacks, built-in AM antenna, and 7-section telescopic FM antenna. Convenient carrying handle; on/off switch on volume control; vernier tuning knob. 2-position band selector—FM band 86.5 - 108 MC, AM band 535 - 1605 KC. Economical to operate—only 4 of the most popular priced "C" type flashlight batteries (included). Overall 10"x2 3/4"x6 3/4" high.

FS-92 5.00 down Net 69.95  
8A-156 Extra Burgess No. 1 Battery ea. Net 13

## NEW! LAFAYETTE SUPER BUY AC/DC TABLE RADIO



**8.75**

- Power Packed Performance — 5 Tubes (2-dual purpose)
- Advanced Type Super-Heterodyne Circuit
- "Easy-Tune" Dial
- Attractive Decorator Cabinet
- For Home, Store, Office; Wherever Radio Pleasure is desired

This Lafayette SUPER-BUY features 5 tubes (2 Dual Purpose) giving peak performance for clear, steady sound. A sturdy 3 1/2" Alnico PM Speaker gives fine tone response. An unusual "Easy-Tune" dial makes station selection simple. The built-in antenna brings stations in loud and clear. Covers the entire broadcast band from 530 to 1600 KC. Tubes: 1-12BE6, 1-12BD6, 1-12AV6, 1-50C5, 1-35W4. Will operate on 105-125 volts AC or DC. Dimensions 4 1/2" high, 6 3/4" wide, 3 3/4" deep. Shpg. wt., 3 lbs. Net 8.75 FS-224

## "CONTEMPORARY" AC/DC RADIO



- Styled For Any Decor!
- Priced For Every Pocket!
- Put One In Every Room!
- 5 Tubes For Peak Performance!

**10.99**

A "better" 5 tube radio — engineered and styled to last. Petite, contemporary design maintains clean, good looks and peak performance. 5 tubes (2 dual purpose), plus a Hi-Q ferrite rod antenna pulls in more distant AM stations. 3 1/2" P.M. speaker, properly baffled in a sturdy, vented cabinet for clear tonal quality. Muted

colors to match any color-scheme; gold trim. Pedestal base swivels for sound and reception directivity. Cabinet measures 8 1/2" x 4 1/4" x 4" overall. Tubes: 35W4, 50C5, 12AV6, 12BA6, 12BE6. For 117 V. A.C./DC. Shpg. wt., 3 lbs. Net 10.99 FS-233

## NEW! TERADO "DYNAMO" • Convert Your Table Model Radio to a Car or Boat Radio

Operate any small radio in any 12 volt car, truck, boat or trailer. No installation — just plug into cigar lighter. Needs no outside antenna — table radios will operate on their own built-in antenna. Will also operate your electric shaver or any electric appliance up to 20 watts. Complete with generator condenser and ignition noise suppressor. Measures only 2" x 2" x 3 3/4". Shpg. wt., 2 lbs. Net 8.46 CV-26



**8.46**




**18.66**

- Plays In Any 12V. Car or Boat or on 117V AC/DC
- No Installation — Just Plug In Lighter
- Needs No Outside Antenna
- Complete With Generator Condenser and Noise Suppressor

Play this radio anywhere! In the home — car — boat — trailer! Any place you can obtain a 12V D.C. or 117 V AC/DC supply! The radio (our FS-233) and the new Dynamo inverter form a customized package to suit a wealth of needs. You can even run your shaver in your car or boat! Shpg., wt., 5 lbs. Net 18.66 SP-229

# NEW! LAFAYETTE 9 TRANSISTOR 3 BAND PORTABLE RECEIVER

**Weather, Beacon, Marine, Aviation Bands**  
Plus Standard Broadcast. Employs 9 Transistors, 2 Diodes, plus a Thermistor for high gain performance.

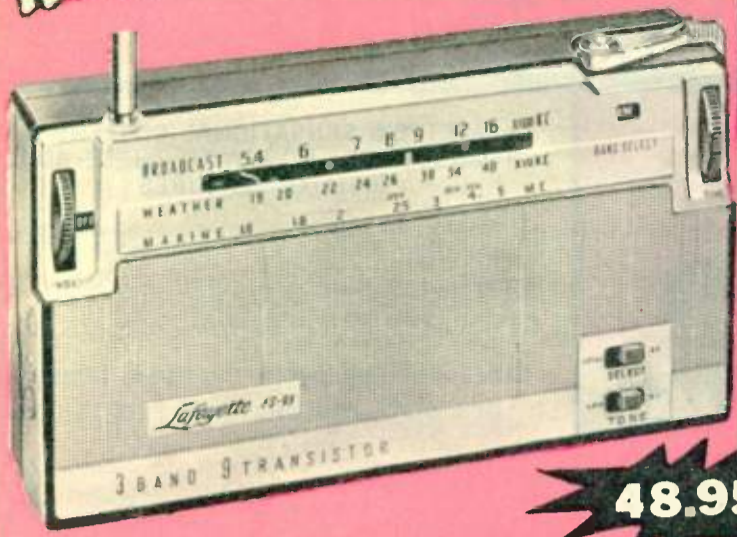

**NO RADIO ON THE MARKET CAN COMPARE WITH ALL THESE FEATURES**  
For The First Time A Radio That Receives 190-400 KC Weather, Airplane and Direction Beacon Band Plus 1.6 — 5 MC Marine Band Plus Broadcast Band

- Three Bands  
Long Wave Weather Band 190-400 KC  
Broadcast — 540-1600 KC  
Short Wave Marine Band 1.6 — 5 MC
- Built-In Quality Speaker
- Telescoping 9 Section Antenna
- Earphone With Cord, Plug, and Leather Case
- Sensitivity Control
- Tone Control
- Powered by 4 Inexpensive 1.5V Batteries
- An Outstanding Value At Any Price
- Compact, Lightweight, Self-Contained
- Jack For External Speaker
- Microphone Adapter for P.A. Use

**48.95**  
**2.00 DOWN**


A mighty mite in any class, the Lafayette 3 band portable outperforms many home radios. Combining extremely sensitive receiver circuitry with compact design, this receiver is the answer to many boatmen, aviators, weather observers, and outdoorsmen. Giving versatility rarely obtainable in other portable receivers, this unit covers Long Wave, Broadcast, and Shortwave Marine Bands. It can be used to receive Weather, Broadcast, Marine, Aviation, Beacon, and Ham Stations. Features a handsome cabinet with clearly marked slide-rule dial. Nine Transistors, 2 diodes, and 1 thermistor. Built for years of trouble-free operation. SPECIFICATIONS: BANDS—190-400 KC, 540-1600 KC, 1.6-5MC. CONTROLS—ON-OFF Switch, Volume, Tuning, Sensitivity, Tone, and Band Switch. Two antennas—A 9-section telescoping antenna for

long and short waves and a powerful built-in ferrite antenna for Broadcast stations. PUSH-PULL AUDIO POWER OUTPUT STAGE. OUTPUTS—2 Phone jacks, phono. This compact, highly sensitive receiver comes complete with a handsome leather carrying case, earphone, plug, earphone case, cord, shoulder strap, battery and adapter for an external speaker. Size—8½ x 4¾ x 1¾". Carrying weight—less than 3 lbs. Shpg. wt., 4½ lbs.

FS-93 2.00 Down Net 48.95  
Replacement battery for above receiver (Four Required). BA-156 Net each .13



- Adapter for External Speaker
- Earphones with Cord, Plug, and Case

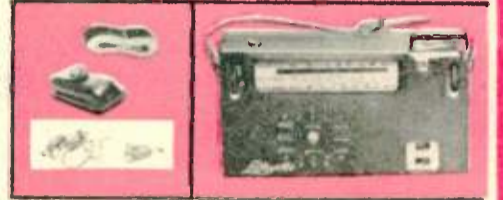

**NEW!**

## LAFAYETTE 7 TRANSISTOR 2-BAND MARINE & BROADCAST RADIO



- Covers AM Broadcast Plus 1.6-4.8 MC. Marine Band
- Sensitive Receiver Uses 7 Transistors, 2-Diodes, And 1-Thermistor
- 2 Built-In Antennas, Including 9 Section Telescoping Antenna for Marine Band
- Operates on 2 Inexpensive Penlight Batteries
- Complete With Carrying Case, Batteries, and External Earphone
- A Must For Marine Enthusiasts
- Compact and Light-Weight

With this new sensitive transistorized radio, Lafayette answers the needs of the marine enthusiast. Designed to be used by the week-end sailor as well as the serious yachtsman; the FS-223 is a power-packed, 7 Transistor, superheterodyne receiver. It receives both the standard AM broadcast band and the Marine Band (1.6-4.8 MC). A built-in antenna is used for the broadcast band and a 9 section telescoping antenna for the marine band. The telescoping antenna is readily detachable and may be carried in the same manner as a pocket pen. The receiver circuitry utilizes 7 transistors, 2 diodes and 1-thermistor for power-packed performance. Simple selector switch allows choice of Broadcast or Marine

Bands and a clearly marked slide dial makes tuning simple. The built-in speaker can be shut-off by inserting an external earphone (supplied) for personal listening. Operates on 2 inexpensive Z cells giving up to 3 times longer life than ordinary 9 volt batteries. Comes complete with 9 section telescoping antenna, carrying case and earphone. Measures only 5¾x3½x1½". Shpg. wt., 2 lbs.

FS-223 2.00 Down Net 29.50

Replacement batteries for FS-223 7 Transistor radio, 2 required. BA-155 Z Cells Net each .13

**29.50**  
**2.00 DOWN**




Complete with Carrying Case


Earphone

## LAFAYETTE "LONG DISTANCE" Broadcast AM-Shortwave Table Radio

SW VALUE of The Year

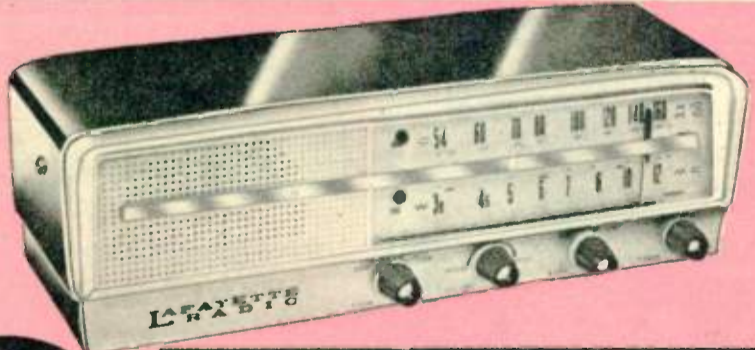


**Only 26.50**  
**NO MONEY DOWN**

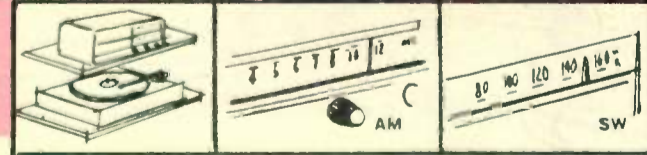

Use with Phono Slide Rule Tuning Dial

A smart new way to enjoy yourself—listen to short-wave radio! Never before has a SW receiver of this quality been offered at such a low, low price. Beautifully styled to fit into any room, the 231 features 7 tube performance from 5 tubes (2 dual purpose) for maximum station "pulling" power. Separate SW antenna terminal to permit antenna selection suitable for location. Large PM speaker and 3-step tone control enhance your audio pleasure. Extremely legible slide-rule dial has separate pilot lights of different color which automatically switch-on to quickly identify band in use. In addition a phono jack is provided in the rear of the set for connecting any external phonograph. Covers the entire broadcast band and SW band from 3.8—12 MC. Tubes: 6BE6, 6BD6, 6AV6, 6AR5, 6X4. For 117 V, 60 cycles AC. Size 16Wx5¼Dx 5½"H. Shpg. wt., 10½ lbs. FS-231 Net 26.50

- Power Packed 7 Tube Performance—5 Tubes (2-dual purpose)
- Large Slide Rule Tuning Dial with Automatic Indicator Lights
- Provision For External Phonograph
- "Big Speaker" Sound
- Attractive Decorator Cabinet

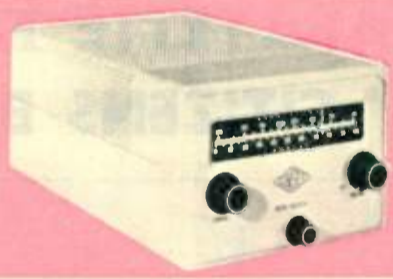

**109.50** 5.00 Down  
**NEW! GONSET VHF RECEIVER**  
Monitors 108-135 mc Aircraft Frequencies

This Gonset Model 3156-B is a VHF receiver, ideal for monitoring of aircraft and other AM communications in the 108-135 mc frequency range. Designed for 50 Kc selectivity, this superb receiver has exceptionally high sensitivity and stability. The circuitry includes an efficient noise limiter, acting to suppress ignition or other man-made noise. 3 front panel controls: tuning (calibrated "sliderule" type), volume, and squelch. Built-in speaker; built-in 115V AC power supply. Overall measures 12¾"x9"x8" Shpg. wt. 12 lbs. ME-549WX 5.00 Down Net 109.50

### NEW GRANCO FM TUNER 18.75



Provides superb high fidelity FM Reception by just plugging into any amplifier and speaker, phonograph, T. V., Custom Music System, or tape recorder. Super selective reception even in fringe areas. Exclusive no drift coaxial tuner and associated circuitry reduce operation to just 2 knobs. Built in antenna. Modern style cabinet. Size 6¼" Wide, 4" Deep, 4½" High. Shpg. wt., 4 lbs. DR-11 T 300G Gunmetal Blue Net 18.75 DR-12 T 300E Ebony Net 18.75

### LAFAYETTE MODEL TM-15 WAVE METER for AMATEUR and CITIZEN BANDER

**8.95**

- Tunes 1.6 to 150 mc
- Portable—Requires No Power Source
- Accurate ¾" Edgewise Panel Meter



A miniature wavemeter for checking transmitter output. Determines relative strength of fundamental frequency and any harmonic or parasitic radiation and in so doing aids in elimination of these unwanted emissions. Complete and self contained, the TM-15 requires no power source. Telescoping antenna is included. Merely choose proper band and turn tuning knob until edgewise ¾" panel meter indicates the presence of RF. If indications occur at several points within the range of wavemeter, the transmitter is probably radiating spurious frequencies. Tunes 1.6 to 150 mc in four calibrated bands. Only 3¼Wx2¼Hx1½"D. Antenna is 10¾" extended 3¼" telescoped, is fitted with a banana plug and is removable. Total shpg. wt., 8 oz. TM-15 Net 8.95



# NEW! LAFAYETTE HE-20A CLASS D Deluxe CITIZENS BAND TRANSCEIVER



**Not A Kit!  
COMPLETELY WIRED!**

**109<sup>50</sup>**

**ONLY 5.00 DOWN**


MADE IN U.S.A.

WITH Foolproof Dependable Relay Switching As Found In Most Expensive Equipment. NOT Electrical Switching With It's Voltage Hazards. NOT Electronic Switching With Inefficiency Due To Tube and Parts Deterioration.

## LAFAYETTE'S SENSATIONAL CITIZENS BAND TRANSCEIVER—NOW WITH THESE ADDED DELUXE FEATURES!

- Pi-Network gives optimum line and antenna matching for greater power output.
- Calibrated "S" Meter
- Improved Series Gate Noise Limiter

EXCELLENT FOR BUSINESS, FARM, INDUSTRY, CAR, BOAT, PERSONAL AND SPORTS USE

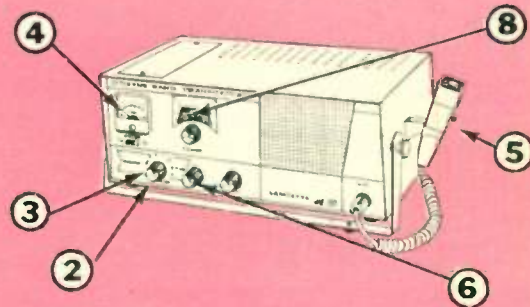

## LOOK AT THESE QUALITY FEATURES

- 1 14 Tube Performance, 3 Diodes
- 2 } 4 Crystal-Controlled Transmit Positions  
4 Crystal-Controlled Receive Positions
- 3 Tuneable Receiver over all 23 channels
- 4 Calibrated "S" Meter with Switch To Measure Signal Strength and To Check on Wattage Input to Final
- 5 Dependable Push-To-Talk Ceramic Microphone & Relay
- 6 Adjustable Squelch Control
- 7 Highly Effective Automatic Series Gate Noise Limiter
- 8 Illuminated Dial
- 9 Built-In 12 Volt Power Supply For Mobile Use
- 10 Comes Complete with Matched Crystals For Channel 9

Quality engineering, design, and features give this Deluxe transceiver a place all-its-own in the Citizens Band Field. Operating within the limits prescribed by the FCC, the HE-20A supplies you with a highly efficient 2-way radio-telephone communications system from your office, truck, auto, boat, store, home, etc. Two or more will serve as an effective communications system over a distance of up to 20 miles or more, depending on the terrain and the height of the antenna.

3 dual function tubes, 1-Quadri-purpose tube, 3 tubes, and 2 Silicon rectifiers give 14 tube performance. The transmitter section features precision engineering to insure power-packed communications. The 5 watt-input crystal-controlled transmitter may be operated on any 4 of the 23 channels assigned by the FCC. The operating channel can be selected by a knob on the front panel (transceiver comes with pair of crystals for channel 9). The receiver circuits provide for 4 crystal controlled receiving channels plus a tuneable superheterodyne receiver that covers all 23 assigned channels, with a sensitivity of 1 microvolt. Effective built-in Squelch circuit quiets the receiver when no signal is being received. Series Gate Noise Limiter materially reduces ignition noise and other unwanted interference. An illuminated dial with planetary vernier tuning is clearly marked with channel numbers and lights up when tuned to any channel. The receiver terminates in 4" speaker amply supplied by a 2-watt audio power output section. The unit comes complete with a push-to-talk ceramic microphone and a bracket for convenient mounting to the side of the transceiver.




Push-to-Talk operation is accomplished with a sturdy, dependable relay.

An "S" meter calibrated in S units 1-9 and to 30 db. above S-9, allows measurement of incoming signal strength. The meter is wired with a switch to enable monitoring of final amplifier wattage. Incorporates Pi-network for optimum matching to 30-100 ohm antenna for high signal output. A low-loss antenna jack is mounted at the rear of the cabinet to accept the popular PL-259 connector used with dipole, ground plane, rod, and direct mounting (Lafayette HE-19 Antennas Rugged, low silhouette case with a bracket handle for installation at any location and in any position. Tube line up 1-6AW8A, Oscillator Amplifier; 1-6BA6, RF amplifier; 1-6BA6 1st IF Amplifier; 1-6BE6, Converter; 1-6EA8, 2nd IF Amplifier and 1st Audio Amplifier; 1-6AQ5 Audio Output Modulator; 1-6T8, ANL, Detector, AGC, Squelch Clamp and 2nd Audio Amplifier. Size 12x5x8 1/2" D. With 115 Volts AC/12 Volts DC Power supply. Shpg. wt., 14 lbs.


HE-20AWX 115 Volts AC/12 Volts DC	5.00 Down	Net 109.50
HE-21 Transmit Crystal (Specify Channel or frequency)		Net 2.50
HE-22 Receive Crystal (Specify Channel)		Net 2.50
Direct plug in antenna for short distance communications.		Net 3.95
HE-19 Shpg. wt., 1 lb.		



# New! LAFAYETTE HE-15A 2-WAY SUPERHET CITIZENS BAND TRANSCEIVER!

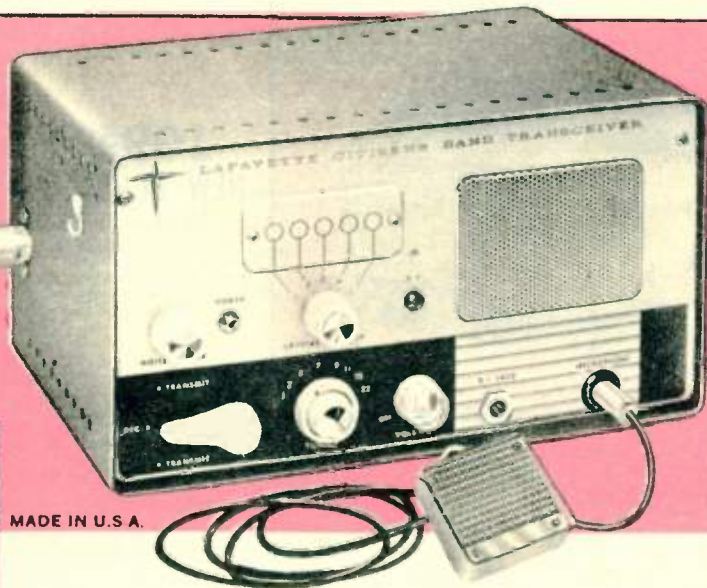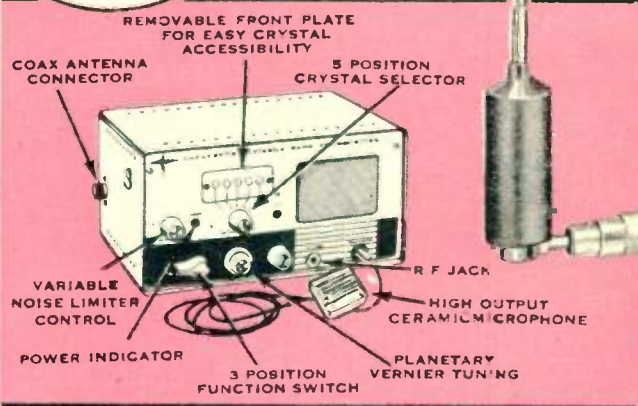

Completely Wired - NOT A KIT!

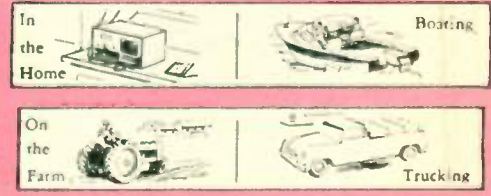

Outstanding Performance, Design, and Ease-Of-Operation. Meets All FCC Requirements

CITIZENS BAND—The New Two-Way Personal Communications Method for Everyone—Fill out the FCC form enclosed with each Lafayette Transceiver. No examination or technical knowledge required—Any citizen 18 years or older is eligible for a license.

**ONLY 59.50** Only 5.00 Down

COMPLETE 2-WAY COMMUNICATIONS FOR BUSINESS, HOME, FARM, BOAT, AND SPORTS  
Not Superregenerative but SUPERHET!  
NOW WITH ADDED FEATURES

- Improved Selectivity and Power Output
- Effective Full-Wave Variable Noise Limiter
- RF Jack on Front Panel
- Ceramic Temperature-Free Microphone
- 5 Crystal-Controlled Transmitting Positions
- Superheterodyne Tuneable Receiver Over Full 23 Channels
- 4 Dual Function Tubes, plus 2 Single Function Tubes, plus 2 Rectifiers for 12 Tube Performance
- Planetary Vernier Tuning
- Complete with Transmitting Crystal for Channel 9

## THE GREATEST VALUE in the CITIZENS BAND FIELD

The Lafayette HE-15A Superheterodyne Transceiver is both a compact precision transmitter and receiver designed to operate on the new class D "Citizens Band." Two or more of these units furnish your own communications system covering up to a 20 mile or more radius depending on antenna height and terrain. The Transceiver features 5 crystal controlled transmitting channels operating at a maximum legal power input of 5 watts fully modulated. RF stage in both transmitter and receiver. The 5 position crystal selector on the front panel selects any one of 5 transmitting frequencies. These 5 crystals are readily accessible by means of a removable front plate. The superheterodyne receiver is tuneable over the full 23 channel band with 3 watts audio output. AVC, and an amazingly effective Full-Wave Variable Noise Limiter. The Noise Limiter is continuously variable from the front panel for diminishing ignition and other unwanted noise pickup. RF jack on the front panel may be used to monitor the current in the final tube using external meter. Controls include a 3 position function switch (Transmit, receive, and transmit with spring return), planetary vernier tuning plus variable noise limiter. Output impedance matches 52 and 72 ohm antenna with Amphenol type coax connector. Has large PM speaker; input jack for crystal or ceramic microphone; power receptacle in rear for AC

line and 6 or 12 volt external power supply. Supplied with single transmitting crystal for channel 9, high output ceramic microphone, and brackets for easy mounting of units in auto, boat, etc. Operates on 115 volts AC. Addition of 6 or 12 volt power supply (separately supplied) adapts transceiver for mobile operation. Size 10 1/2" Wx5 1/2" Hx6 1/2" D. Tube complement 2-5U8A 6EA8, 1-6AL5, 1-6V6, 1-12AX7, 1-6AW8.

HE-15A WX Shpg. wt., 11 lbs. 5.00 Down Net 59.50

POWER SUPPLY: Adapts HE-15A for mobile operation. Complete with cable, 6 or 12 volt vibrator and mounting flanges. Completely enclosed. Size 4 1/2" Dx6 1/2" H. Shpg. wt., 4 lbs.

HE-16W For 12 Volts Net 10.95

HE-18W For 6 Volts Net 10.95

ANTENNA: Base loaded telescoping whip antenna with PL259 coax connector. Mounts directly on rear of cabinet. Telescopes to only 15". For short distances. HE-19 Shpg. wt., 2 lbs. Net 3.95

TRANSMITTING CRYSTALS: For any of the 23 channels Specify channel or frequency. HE-830 Net 1.95



# LAFAYETTE — America's Citizen's Band Headquarters

## VOCALINE 465 MC CITIZENS BAND TRANSCEIVER

WE BOUGHT ALL THE MANUFACTURER HAD LEFT OF THIS FAMOUS 465 MC TRANSCEIVER TO OFFER OUR CUSTOMERS

Another LAFAYETTE sensational Citizen's Band Value!

Lafayette price

QUANTITIES LIMITED!

**24<sup>95</sup>**

PER UNIT

NO MONEY DOWN! SEE PAGE 54

offers simplified, effective non-interference short-range communications for:

- ◆ WITHIN PLANT
- ◆ WAREHOUSES
- ◆ SURVEYING
- ◆ SPORTS EVENTS
- ◆ BOATSMEN
- ◆ INDUSTRY
- ◆ FARMS
- ◆ FISHERMEN, ETC.

**FOR MOBILE**  
Operates directly from 6-volt car battery. Supplied with voltage dropping resistor for operation from 12-volt car battery.

The Vocaline JRC 400 is a ruggedly constructed Citizens Band Transceiver that operates on 465 MC line of eight frequencies for private or personal short distance radio communications. It is capable of transmitting up to an average of 2 miles distance, depending on the terrain and height of the antenna (considerably more on water). No installation is required — just plug into any 115 volt AC outlet or attach to 6 volt DC power source, and is portable, lightweight, compact and durable. Its frequency is fixed and requires no tuning. It is FCC approved and any U.S. citizen over 18 years of age can obtain a station license by forwarding a filled out form enclosed with the transceiver. The JRC 400 comes complete with built-in vibrator power supply, 6AF4A, 6AV6 and 6AS5 tubes in a highly effective superregenerative circuit, microphone, AC and DC line cords, and plug-in antenna. Size: 5 1/2" x 9". Shpg. wt., 5 1/2 lbs.  
SP-225WX For 115VAC 6 volts DC Net 24.95  
INTERIOR TO EXTERIOR GROUND PLANE ANTENNAS  
HE-238 Model GP4-10 (10' of RG58U cable) Net 6.35  
HE-240 Model GP5-50 (50' of RG8U cable) Net 19.95



## FREE! Any one of these Citizens Band Antennas with the purchase of any Transceiver listed below

FOR BUSINESS, INDUSTRY, CARS, BOATS, SPORTS AND PERSONAL USE.

**FIXED**

**GROUND PLANE ANTENNA**

**15.63**

Solid aluminum 108 inch heat-treated radials and radiator. Elements supplied in two 54 inch lengths joined by threading coupling nuts. Radials droop for 50 ohm match. Accepts 1 1/4 inch tubing RG-58 U cable and PL-259 connector. Shpg. wt., 4 lbs.  
HE-661WX Net 15.63

**COAXIAL ANTENNA**

**14.95**

Full half wave length for maximum performance. Seamless aluminum tubing with all aluminum construction. Rugged main support is cast aluminum. Accepts RG-59 U or RG-58 U cable with PL-259 termination. 15 ft. 1 1/4" TV mast or 12 ft. aluminum tubing required for support. Overall height 17'6". Shpg. wt., 5 lbs.  
HE-804WX Net 14.95

**MOBILE REAR COWL MOUNT ANTENNA**

**18.52**

Complete Antenna Kit for rear deck or side mounting. Consists of cadmium plated base, special alloy cadmium plated spring, 102" stainless steel whip, cable and gutter clip. Furnished with 20 ft. RG-58/U cable having PL-259 connectors on both ends. Shpg. wt., 6 lbs.  
HE-674WX Net 18.52

**MOBILE BUMPER MOUNT ANTENNA**

**15.95**

Adaptable to virtually all American and Foreign cars. Includes double bumper mount with cable terminals, cadmium plated spring 102" stainless steel whip, 20 ft. of RG-58 U cable with PL-259 connector on one end, solder lugs on the other, and whip hold-down clip. Shpg. wt., 5 lbs.  
SP-198WX Net 15.95

**NEW! RAYTHEON RAY-TEL TWR-1 CITIZENS BAND TRANCEIVER**

- 4 Channel Crystal Control
- Noise Limiter and Squelch
- Battery Saver Switch
- Vibrationproof, Ruggedized Design

**16995**

Designed for top quality performance, this Class D crystal controlled 23 channel transceiver features full-range AVC, high selectivity and a quality push-to-talk microphone. Transmitter "on" indicator shows maximum transmitting efficiency. Earth tubes and rugged chassis make it ideal for mobile use on land or sea. Units are equipped for 115VAC and 12 VDC operation. Size: 5 1/2" x 7 1/2" x 1 1/2" D. Shpg. wt., 15 lbs.  
HE-921WX 5.00 Down Net 169.95  
HE-922 Matched Crystals specify channel or frequency Net 6.00

**VOCALINE ED-27M "COMMAIRE" 4 CHANNEL CITIZENS BAND RADIO**

- Crystal Controlled — 4 Channel Transmit, 4 Channel Receive.
- Double Conversion Superhet Receiver
- Noise — Immune Patented Squelch Circuit
- Transistorized Power Supply
- Transmitter — 5 Watt Input; 3 Watts Output

Sensitivity: 0.3 microvolts. Selectivity: — 5KC at points 6 db down. Audio Output: 4.5 Watts, 10 tubes 6 or 12 Volt transistorized power supply. 5 1/4" x 9 1/2" x 8 1/4" deep. Shpg. wt., 12 lbs. Complete with crystal for one channel, push-to-talk microphone, hanger, universal mount, antenna loading light and AC/DC power cords.  
HE-253WX 115VAC 6VDC 5.00 Down List 189.50 Net 151.60  
HE-254WX 115VAC 12VDC 5.00 Down List 189.50 Net 151.60  
HE-255 XD-2 Extra crystal. List 5.00 Net 4.00  
Specify channel or frequency

**JOHNSON VIKING "MESSENGER" CITIZENS BAND TRANSCEIVER**

- 5 Crystal Controlled Receiving Channels
- 5 Crystal Controlled Transmitting Channels
- Push-To-Talk microphone
- Built-in squelch

Excellent receiver sensitivity and selectivity. Built-in squelch, Automatic Volume Control and Automatic Noise Limiter. Transceiver has 10 tubes (including rectifier). Compact modern styling — 5 1/2" x 7 1/2" x 1 1/2" D. Complete with tubes, push-to-talk microphone, and crystals for one channel. Shpg. wt., 15 1/2 lbs.  
HE-447WX Model 242-128 115VAC 12VDC 5.00 Down Net 144.95  
HE-448WX Model 242-127 115VAC 6VDC 5.00 Down Net 144.95  
HE-451WX Model 242-126 115VAC 5.00 Down Net 134.95  
Crystals in Matched Pairs for Channels 1 thru 23 (Specify Channel).  
HE-449 250 901 thru 250-923 Per pair Net 7.95  
Universal Dash Mounting Kit for HE-447WX, HE-448WX, HE-451WX.  
HE-407 Model 251-828. Shpg. wt., 2 lbs. Net 2.50

**GONSET G-12 MULTI-CHANNEL 2-WAY CITIZENS BAND RADIO**

- 4 Crystal Controlled Transmit and Receive Channels
- Adjustable Squelch
- Transmitter Tuning Indicator

Features press-to-talk switch on microphone, noise limiter, built-in speaker and adjustable squelch. Resistant to moisture. Tube complement: 6CX8 (OSC-Doubler-Final), 6AU6 (RF), 6UR8 (Osc-Mixer), 6BH6 (1st audio), 6AL5 (AFL — adjustable). Complete with push-to-talk ceramic microphone, universal desk stand/mobile mounting bracket, and transmit and receive crystals for one channel. 4 1/2" x 7 1/2" x 1 1/2" D. Shpg. wt., 13 lbs.  
HE-537WX Model 3316 For 117VAC 12VDC 5.00 Down Net 149.95  
HE-539WX Model 3323 For 117VAC 6VDC 5.00 Down Net 149.95  
HE-538 Matched Pair Crystals for G-12 Specify frequency Net 5.90

**RCA MARK VII 27 MC CITIZENS BAND RADIO PHONE**

- Push-to-talk Ceramic Microphone
- Built-in Squelch Control
- Illuminated Tuning Dial
- 4 Crystal Controlled Transmitting and Receiving Channels
- 23 Channel Tuneable Receiver

Features a highly selective superheterodyne receiver and crystal-controlled 5 watt transmitter. Choice of same-frequency operation on any of 4 pre-selected channels or transmission on one of these four channels and reception on any other channel in the band. Receiver has squelch, automatic noise limiter, and 1 microvolt sensitivity at 6 db signal to noise ratio. 2 watts of audio output into a 4" built-in speaker. Charcoal and light grey metal case. Complete with microphone and holder, mounting bracket and one transmitting and receiving crystal. 12 1/2" x 8 1/2" x 1 1/2" D. Shpg. wt., 14 lbs. For 115VAC 12VDC operation.  
HE-637WX 5.00 Down Net 189.50  
HE-638WX For 115VAC 6VDC operation 5.00 Down Net 189.50  
Extra set of transmitting and receiving crystals. Specify channel or frequency. HE-639 Net 10.00

**NEW! POLY-COM II G DELUXE CITIZENS BAND TRANSCEIVER**

- Dual Conversion Superheterodyne Receiver
- Adjustable Squelch
- Automatic Volume Control
- All-Electronic Transmit-Receive Switching
- 4 Crystal Controlled Transmit and Receive Channels

A rugged, reliable, compact 4-channel transceiver in the field, on vehicles, planes, boats and in the office or home. Precision engineered and tested to give professional performance: super sensitive dual conversion superhet receiver, adjustable vacuum tube squelch circuit, delayed automatic volume control, floating series gate-type noise limiter, built-in carrier and modulation indicator, 3 full watts audio output, minimum of 2.5 watts power output to antenna, separate mike pre-amp and oscillator. Adjustable antenna matching for 52 or 72 ohms. Weatherproof 4" speaker, cadmium plated steel weatherproof case and chassis. Unbreakable metal encased carbon microphone has press-to-talk button. Retractable coil cord keeps mike handy. 11 tubes of which 5 are dual purpose for 16 tube performance. Comes complete with crystals for one channel, microphone, instructions. Size 11 1/2" x 7 1/2" x 5" Shpg. wt., 15 lbs.  
HE-295WX 115 VAC 6VDC Net 189.50  
HE-296WX 115VAC 12VDC Net 189.50  
HE-297 Matched Transmit/Receive Crystals (Specify Transmit Frequency) Per pair Net 6.00

**NEW! LAFAYETTE HE-28 RF WATTMETER AND SWR BRIDGE**

**37<sup>50</sup>**

NO MONEY DOWN! SEE PAGE 54

- Measures SWR and Relative Power Output Up to One Kilowatt
- Built-in Dummy Load for Direct Power Readings Up to 150 Watts
- For Use With 52 and 75 Ohm Transmission Lines

A combined SWR and power output indicator which will handle up to a full kilowatt of RF. Measures standing wave ratios from 1:1 to 4:1 on either 52 or 75 ohm lines. Actual transmitter power output into a self-contained 52 ohm dummy load can be read directly on the 4 1/2" meter in 2 ranges: 0-15 and 0-150 watts, full scale. Relative power may be read up to one kilowatt. SWR readings within 10% from 1.5 to 30 Mc; RF power readings within 5% full scale from 0.1 to 50 Mc. The HE-28 may be left permanently in the transmission line for continuous monitoring of relative output or SWR, so that any abnormal variations in the source or antenna system will immediately be shown up. Indicator consumes negligible power. The transmitter output and antenna are connected to the meter by means of standard VHF coaxial connectors. Two line impedance slide switches in rear are set to match either a 52 or a 75 ohm transmission line. Three-position function switch on front panel is set to POWER for direct power readings up to 150 watts. SWR SET to adjust the bridge for SWR readings, and SWR for measurement of SWR and relative power up to 1 kilowatt. Size: 4 1/2" x 4 1/2" x 7 1/2" H. In an attractive grey crackle finish, with rubber feet. Complete with carrying handle and instructions. Shpg. wt., 7 lbs.  
HE-28 Net 37.50

**Lafayette SPECIAL 4,000 OHM HEAD SET**

**DOUBLE MAGNET**

**1.59**

Quality double headset with adjustable headband for comfortable listening. 4000 ohms d.c. resistance. Has durable permanent magnets, removable ear piece and 3 1/2 ft. of extension cord, covered with woven cotton braid and terminated with standard head phone tips. Extremely light weight and efficient. Shpg. wt., 12 oz. F-374 Net 1.59

**LAFAYETTE SPECIAL! TELEGRAPH KEY**

**69c**

Economical and practical code practice key. Solid, heavily chrome and nickel plated metal parts, molded phenolic base. Adjustable spring tension and adjustable contact clearance. A real buy! Base 3 1/4" long x 1 1/4" wide. Overall length 5"; height 1 3/8". Shpg. wt., 12 oz. MS-319 Telegraph Key Net .69

**high frequency CODE PRACTICE BUZZER**

Adjustable frequency buzzer ideal for individual or group code practice. Black molded phenolic housing. Works with 1 1/2 volt battery. Screw adjustment for changing tone. 1 7/8" diam. x 1 1/4" high. Shpg. wt., 6 ozs. MS-436 Buzzer Net .79

Reg. Value 2.50

# LAFAYETTE

## 6 METER TRANSCEIVER

Completely Wired!

Not a Kit



### NOT SUPER-REGENERATIVE BUT SUPERHETERODYNE

SMALL, COMPACT  
COMPLETE  
6 METER STATION—  
TAKE IT WITH YOU  
ANYWHERE!

**57<sup>50</sup>**  
NO MONEY DOWN

NOW WITH

- New Efficient Pi-Network Output with Hi-"Q" Tuned Circuit
- 7 Watts Input to 6CX8 Pentode Final
- Efficient Adjustable Noise Limiter
- Superhet Receiver Tunes to Entire Band (50-54 mc)
- Separate Oscillator—Final Stage
- Accessible Front Panel Socket With Crystal For 50.2 MC Output

#### • Ceramic Temperature-Free Microphone

Meet the enjoyable challenge of 6 meter operation efficiently and economically with the Lafayette HE-35 6 meter transceiver. This small, compact transceiver features a Transmitter with 7 watts input to a 6CX8 pentode final, high quality plate modulation, built-in adjustable TVI filter, and antenna matching network for 30 to 100 ohm antenna. Superheterodyne receiver tunes entire 6 meter band (50-54 mc) and includes variable noise limiter. The transmitter uses a 3rd overtone crystal in easily accessible socket located on front panel, has RF output and modulation indicator. Low loss SO-239 coaxial antenna output jack. Complete with attractive high output crystal

microphone with on-off slide switch and mounting brackets for mobile mtg. 6 or 12 volt power supply separately available for mobile operation. Built-in power supply operates on 110-120 volts, 60 cycle. 10<sup>3</sup>/<sub>8</sub>"xLx5Hx6<sup>3</sup>/<sub>8</sub>" D Tubes: 2-6U8A/6EA8, 6AL5, 12AX7, 6V6GT, 6CX8. Shpg. wt., 11 lbs. HE-35AWX Net 57.50

MOBILE POWER SUPPLIES  
5<sup>1</sup>/<sub>2</sub>"x4<sup>1</sup>/<sub>2</sub>"x2<sup>1</sup>/<sub>4</sub>" Shpg. wt., 4 lbs. HE-16W 12 Volts Net 10.95  
HE-18W 6 Volts Net 10.95

Additional Crystals—Specify Frequency  
HE-36 Shpg. wt., 4 oz. Delivery 3 wks. Net 4.95

## NEW!

### LAFAYETTE HYBRID PHONE PATCH



**24<sup>50</sup>**

only 2.00 Down

- Enjoy The Pleasure of Handling Phone Patch Traffic With This Deluxe Hybrid Patch

Provides an accurate balance between 500 ohm line and station equipment. Hybrid circuit allows use of AM or SSB with VOX. All controls on front panel. NULL, GAIN, LINE ON-OFF, PATCH-MIC switch, and OPERATE-NUL meter switch. When VOX is desired, receiver signal at transmitter output is nullled out on meter to permit proper break-in operation. Compact, sloping cabinet will fit into any station arrangement. Sits on 4 non slip rubber feet. Size 3<sup>1</sup>/<sub>2</sub>"H x 5<sup>1</sup>/<sub>2</sub>"W x 4<sup>1</sup>/<sub>2</sub>" D. Shpg. wt., 3 lbs. HE-76 2.00 Down Net 24.50

### LAFAYETTE NEW UNIVERSAL 6 METER and BROADCAST MOBILE ANTENNA ONE ANTENNA FOR BROADCAST AND 6 METERS!

AT A SENSATIONALLY LOW PRICE OF

**4.95**

6 meter antenna that replaces your Auto audio antenna for operation on both 6 meters and on regular AM broadcast reception. 50" stainless steel mast, all chrome ball type base adjustable to 180° for front rear or side mount. Complete with 50" lead. Highly versatile and durable. Shpg. wt., 4 lbs. HE-801WX Net 4.95

#### Cush Craft

### MOBILE HALOS

6 METERS 48-56 mc

**12.50**

26" diameter, weighs 1 lb. Concentric gamma match. The UNIQUE STREAMLINED tuning vane permits extreme broadband coverage without bulky traps. SWR 1:1 at frequency, from 5 to 15 DB gain. Supplied with 3 section, 9' telescoping aluminum mast to fit any standard mobile mount. Shpg. wt., 4 lbs. MODEL AM-6M Single 6 Meter Halo with mast. HE-748WX Net 12.50

#### Cush Craft

### 5 ELEMENT 6 METER BEAM

Constructed of 1/2" 0.050 wall aluminum tubing with hardware. Booms 0.058 wall drawn aluminum. Driven element is concentric gamma matched for direct coax feed. Light enough for any heavy duty TV rotator. Turning radius—7<sup>1</sup>/<sub>2</sub>". Forward Gain—9.5 db. F/B ratio—2<sup>1</sup>/<sub>2</sub> db. All parts marked for quick, neat assembly and center band operation. HE-746WX Shpg. wt. 15 lbs. Net 19.50

### NEW! LAFAYETTE TRANSISTORIZED FIELD STRENGTH METER

MAKES ANTENNA TUNE-UP A SNAP

**14.95**

- Professional type FS meter
- Enables increase of signal strength
- Earphone jack to monitor audio
- Can be used remote from antenna



Now you can obtain maximum power output, for maximum talk power signal strength, from your Citizens Band Transmitter. In view of the 5 watt legal input, it is important to get maximum power from your antenna. The Lafayette Transistorized Field Strength Meter enables you to tune your antenna and transmitter for maximum output. It eliminates any doubts as to antenna efficiency. Operating power is obtained from an inexpensive 1<sup>1</sup>/<sub>2</sub> volt flashlight battery enabling use remote from the antenna. Battery life is exceptionally long, approaching "shelf-life." Field Strength read on a clearly marked milliammeter. Comes with a jack for insertion of an earphone for monitoring audio quality of your transmitter. In an attractive metal cabinet with meter, telescoping antenna, battery and all parts. Shpg. wt., 2 lbs. TM-16 High output crystal earpiece for use with TM-16 Net 14.95 MS-439 Net 1.09

### NEW NC-190 RECEIVER



**199.50**

A double conversion, general coverage receiver for 530kc through 30 Mc. Unique Ferrite Filter at the second i.f. (230 KC) provides selectivity variable from 5 KC to 600 cycles at 6db down. Sensitivity is better than 1 microvolt for 10db S/N ratio. Choice of calibrated electrical bandspread for either the amateur or foreign broadcast bands, at the flip of a knob. Bandspread vernier provides 60:1 tuning ratio. Frequency stability is achieved through voltage regulation and the use of ceramic coil forms in the oscillator tuned circuits, plus heavy-duty construction. Front end employs a low noise 6BZ6 r.f. amplifier with antenna trimmer. Other features: separate product detector for SSB, calibrated USB LSB BFO control, AVC and edge-reading "S" meter which operate on all reception modes. Noise limiters, automatic series gate for AM, i.f. limiting for SSB CW. Accessory crystal calibrator provides 1 Mc markers throughout the tuning range. Audio output 1 watt at 10% distortion, 32 ohms. Headphone jack on front panel. For 105-125 VAC, 50-60 cps. Dimensions: 15<sup>1</sup>/<sub>2</sub>"x8<sup>1</sup>/<sub>2</sub>"x9 D. Shpg. wt., 28 lbs. HE-221WX Net 199.50 Model XCU-109 crystal calibrator. Shpg. wt., 2 lbs. HE-206 Net 20.95 Model NTS-3 Matching speaker. Shpg. wt., 6 lbs. HE-220 Net 19.95

### NEW! HALLICRAFTER S-120 RECEIVER



**69.95**

Covers Broadcast Band 550-1600 KC plus 3 Short Wave Bands 1600kc to 30 Mc. 3 Antennas, Slide Rule Bandspread Dial, New Compact Styling

This new precision built receiver features electrical bandspread with slide rule bandspread dial and separate bandspread tuning condenser. Front panel headphone jack which automatically disconnects self-contained speaker may be used to drive remote 8 ohm speaker. Has 3 antennas ferrite loop for broadcast band adjustable whip for short wave, wire antenna. Tube complement: 12BE6 Converter, 12BA6 I-F amplifier, B.F.O. 12AV6 Audio amplifier, AVC detector, 50C5 Audio, plus Selenium Rectifier, 455KC IF. Attractive gray steel cabinet with silver trim. 13<sup>1</sup>/<sub>2</sub>"x5<sup>1</sup>/<sub>2</sub>"x8<sup>1</sup>/<sub>2</sub>" D. Shpg. wt., 12 lbs. Operates on 105-125V, 50-60 cycles AC DC. U/L Approved. HE-127 Net 69.95

### NEW! 14-gain SWL Antennas FOR INDOOR USE

**14.35**



Convenient indoor antenna greatly improves the performance of any shortwave receiver. Covers 5-30 Mc. Easy to install and operate. Six foot cable included. Is attached to receiver, the telescoping "rabbit ears" extended, and the "match" and "tune" controls set for maximum signal strength. Attractively housed in unbreakable plastic with chrome-plated antennas. Model SWL. Shpg. wt., 2<sup>1</sup>/<sub>2</sub> lbs. HE-973 Net 14.35

Model SWO high efficiency doublet antenna for outdoor use. Traps peaked on the 11, 13, 16, 19, 24, 31 and 40 meter shortwave bands. Only 40 feet long. With insulators, 100 ft. or lead-in wire and instructions. Shpg. wt., 2<sup>1</sup>/<sub>2</sub> lbs. HE-972 Net 14.35

### PHILMORE CITIZENS BAND EQUIPMENT

#### NEW! PHILMORE CITIZENS BAND TRANSMITTER KIT

A value-packed Citizens Band transmitter designed for use in conjunction with the CC-1 converter or any communications receiver. Full five watts plate input—meets all FCC requirements. Six switch-selected channels. Comes with high quality, push-to-talk ceramic microphone. Dual function meter to measure plate input power and modulation. Swivel handle for underdash mounting or as tilt-stand on a desk. Crystals accessible from rear without removing cabinet. Size 3<sup>1</sup>/<sub>2</sub>"x9<sup>1</sup>/<sub>2</sub>"x8<sup>1</sup>/<sub>2</sub>" D. With crystal for channel 12. Less Power supply (see below). Shpg. wt., 7 lbs. HE-588 2.00 Down Net 47.50

#### NEW! PHILMORE CITIZENS BAND CONVERTER KIT

This kit provides all the advantages of double conversion, superhet reception. Simple cable connections between your auto mounted 11 meter antenna and your car radio allows tuning the Citizens Band Tunes CB Band from 550 to 820 Kcs on car radio dial. Push-button radios may be preset for specific channels. Does not interfere with Broadcast reception—a flick of a switch on the CC-1 returns your car radio to normal operation. Full RF stage. Size 2<sup>1</sup>/<sub>2</sub>"x6<sup>1</sup>/<sub>2</sub>"x5<sup>1</sup>/<sub>2</sub>" D. Less power supply. Complete with Cabinet, Crystal, Handle bracket, and all cables and plugs. Shpg. wt., 3 lbs. HE-587 Net 17.95

#### POWER SUPPLIES

A.C. POWER SUPPLY KIT Companion power supply to CT-1 transmitter and CC-1 converter. Provides antenna changeover relay. Size 4<sup>1</sup>/<sub>2</sub>"x5<sup>1</sup>/<sub>2</sub>"x5 D. Shpg. wt., 7 lbs. HE-585 Net 21.75

12 VOLT DC TRANSISTOR POWERED MOBILE SUPPLY. For mobile operation of CT-1 and CC-1. Utilizes 2-2N234A Power Transistors and 4-Silicon Power Diodes. Antenna changeover relay. Size 4<sup>1</sup>/<sub>2</sub>"x5<sup>1</sup>/<sub>2</sub>"x5 D. Shpg. wt., 7 lbs. HE-586 Net 26.75



HE-587



HE-588

#### DOW-KEY DK60-RFB PREAMPLIFIER



A 50-70 ohm impedance matching broadband preamplifier that will substantially improve the signal to noise ratio and gain of receivers with medium or low sensitivity. Circuit employs 6CB6 low noise RF tube. It provides an overall gain of 1 to 6 "S" units up to

30 db in most receivers, from 15 to 30 megacycles. A slight gain results on frequencies up to 60 megacycles. Use for fixed or mobile installations. Powered by receiver or auxiliary filtered supply. Requires 125-175 VDC at 7 ma. for B-plus and 6.3 VAC at 3 amp for filament of 6CB6 tube. Size: 1<sup>1</sup>/<sub>2</sub>"x2<sup>1</sup>/<sub>2</sub>" D. Shpg. wt., 12 oz. HE-780 Net 10.75

# Why Gamble with Your Communication Equipment?

PRICED EXTRA LOW!  
COMPARE FOR VALUE!

## LAFAYETTE PROFESSIONAL QUALITY AMATEUR COMMUNICATION RECEIVER

SUPERHETERODYNE CIRCUIT UTILIZING 8 TUBES & RECTIFIER TUBE

- BAND SPREAD FOR EASY TUNING
- BUILT-IN "S" METER WITH ADJUSTMENT CONTROL
- EXCELLENT SELECTIVITY
- ACCESSORY POWER SOCKET PROVIDED
- ALL TRIMMERS PRE-ALIGNED
- COVERS 550KC. TO 31MC. IN FOUR BANDS
- VARIABLE BFO AND AF + IF GAIN CONTROLS
- SWITCHABLE AVC & AUTOMATIC NOISE LIMITER
- ALL MAJOR COMPONENTS PRE-MOUNTED
- DUAL 4 AND 8 OHM OUTPUT IMPEDANCES
- 1 RF - 2 IF STAGES FOR HIGH GAIN RECEPTION

IN KIT FORM  
KT-200 **64<sup>50</sup>**  
5.00 DOWN

WIRED AND TESTED  
HE-10 **79<sup>95</sup>**  
5.00 DOWN



High sensitivity superheterodyne circuit utilizes 8 miniature tubes plus rectifier tube and transformer input, full wave rectifier. The 80-40-20-15 and 10 meter amateur bands are clearly indicated on the illuminated dial face, and can be easily tuned with the pre-calibrated band spread. The receiver has complete band switching, thus eliminating the need for bothersome plug-in coils. Band spread is laid out on easy-to-read 0-100 scale, and features a weighted control knob which offers smooth, precise tuning. Coverage of from 550KC to 31 MC is obtained through the use of four switchable ranges (550-1600 KC/1.6-4.8 MC/4.8-14.5 MC/10.5-31 MC). All controls, switches and phone jack are located on the front panel. Receiver sensitivity is 1.25 microvolts for 10DB signal to noise ratio. Selectivity is -60DB at 10KC image rejection is -40DB at 3MC. Panel is grey metal with white lettering, and controls are black with aluminum trim. Hinged top makes inside of receiver readily accessible to operator. 7 7/8"x15Wx3 1/2". Tubes: 3-6BD6, 2-6BE6, 2-6AV6, 1-6AR5, 1-5Y3. Shpg. wt., 22 lbs.  
KT-200WX 5.00 Down Net 64.50  
HE-10WX Same as above, factory wired & tested 5.00 Down Net 79.95  
Ideal "Speaker-Mate" for HE-10 and other communications receivers. Special 4" speaker in handsome, tapered, grey metal cabinet reduces QRN and peaks voice frequencies. Impedance 8 ohms. 7 7/8"x5 1/2"x4 3/4". Shpg. wt., 4 lbs.  
HE-11 Net 7.95



NEW! RECEIVER SPEAKER-MATE  
**7.95**



## NEW! LAFAYETTE PROFESSIONAL AMATEUR COMMUNICATIONS RECEIVER

DESIGNED FOR TODAY'S CROWDED AMATEUR BANDS

**99.95**  
5.00 DOWN

FEATURE FOR FEATURE, SIGNAL FOR SIGNAL  
MATCHES RECEIVERS  
SELLING FOR ALMOST TWICE THE PRICE



- 1 RF - 2 IF STAGES FOR HIGH GAIN RECEPTION
- TUNES 550 KCS TO 30 MCS IN FOUR BANDS
- EASY-TO-READ, ILLUMINATED, SLIDE RULE DIAL
- BUILT-IN Q-MULTIPLIER FOR CROWDED PHONE OPERATION
- ANTENNA TRIMMER FOR OPTIMUM PERFORMANCE ON ALL BANDS
- CALIBRATED ELECTRICAL BANDSPREAD ON AMATEUR BANDS 80 THRU 10 METERS
- 0-100 LOGGING SCALE FOR SWL'S
- EFFECTIVE AUTOMATIC NOISE LIMITER
- AVC-MVC SELECTOR ON FRONT PANEL
- STABLE OSCILLATOR AND BFO FOR CLEAR CW AND SSB RECEPTION
- BUILT-IN EDGEWISE S-METER

Designed for today's crowded amateur bands and the discerning Short Wave Listener, the new Lafayette HE-30 offers features and performance previously unheard of at this price. Outstanding Bandspread. Selectivity with a built-in Q-multiplier, and sensitivity combine to make the HE-30 one of the "hottest" general coverage bandspread receivers ever priced below \$200. For the crowded amateur bands—illuminated Slide Rule Dial, bandspread with markings every 5 KCS on 80 and 40 meters (IT TAKES 16 REVOLUTIONS OF THE BANDSPREAD DIAL TO COVER EACH OF THESE BANDS), every 20 KCS on 20 and 15 meters, and every 50 KCS on 10 meters, plus an edgewise S-meter. For the SWL—a 0-100 logging scale for "instant reset" to a desired station plus coverage from 0.55-30 MCS. The 8 tube (plus a husky 5Y3 Rectifier) circuit provides an RF stage with an antenna trimmer for peak performance PLUS 2 IF stages for improved selectivity. Far from an "empty shell" receiver, the HE-30 utilizes a 5Y3 rectifier in a transformer supplied Full Wave rectifier, this suppresses ripple and hum that often produces poor CW and SSB reception in "stripped-down" receivers. Receiver sensitivity—that important difference between hearing and not hearing stations—1.0 microvolts for 10db Signal-to-Noise Ratio. The built-in BFO can be used to separate CW stations by means of the pitch control, while the Q multiplier adds the selectivity needed for crowded phone band operation. The front panel controls speak for themselves—FUNCTION SWITCH, AUDIO GAIN, SELECTIVITY (Q-Multiplier), FREQUENCY (BFO), BAND SELECTOR, IF GAIN, TRIMMER, AVC-MVC SWITCH, ANL SWITCH, MAIN TUNING BANDSPREAD TUNING, and headphone jack. We invite comparison. Selectivity—60db at 10KC, 0.8 KC @ 6db (with Q-multiplier), IF—455KCS. Speaker—External (not supplied) matches 4 or 8 ohms PM Speaker. Audio Output—1.5 watts. Tubes—6BA6—RF Amplifier, 6BE6 Mixer, 6BE6—Oscillator, 6AV6-Q-Multiplier—BFO, 2-6BA6—IF Amplifier, 6AV6—Detector—AF Amplifier—ANL, 6AQ5—Audio Output, 5Y3—Rectifier. Size—7" high x 15" wide x 10" deep. For 105-120, 60 cps AC, 50 watts. Shpg. wt., 25 lbs.  
HE-30WX 5.00 Down Net 99.95  
HE-11 Speaker for HE-30. Shpg. wt., 4 lbs. Net 7.95

## hallicrafters

## NEW! HALLI-KITS FROM HALLICRAFTERS

A complete 80 through 6 Meters AM/CW Station in Kit Form  
A perfect match for the SX-140 in quality and appearance.



**MODEL SX-110 HAM-SWL RECEIVER**

- BANDSPREAD 80, 40, 20, 15, AND 10 METER BANDS
- CRYSTAL FILTER

Superheterodyne receiver covers 540 KC (broadcast band) to 34 MC in four bands. Features slide rule type dial and electrical bandspread over the 10, 15, 20, 40 and 80 meter amateur bands. Separate bandspread tuning condenser. Switchable crystal filter and built-in "S" meter. All controls are on front panel, and include main and band spread tuning, AM-CW switch, sensitivity, BFO pitch, on/off/line, volume, receiver, stand-by, selectivity, crystal filter-phasing, noise limiter, and headphone jacks. Receiver uses either 3.2 or 500 ohm speaker. Antenna may be doublet, single wire, ground plane or beam type. Utilizes seven tubes plus one rectifier: 6SG7 first IF amp, 6SK7 second IF amp, 6SC7 BFO and audio amp, 6K6GT, audio output, 6ME ANL AVC-detector, 5Y3 rectifier. Output: 2 watts. Grey steel cabinet with chrome trim. Size: 18 1/2"Wx8 1/2"H. 117 AC. Shpg. wt., 32 lbs.  
HE-108WX 5.00 Down Net 169.95  
**MODEL S-108 RECEIVER**  
Same as SX-110 less S-meter, antenna trimmer and crystal filter, but includes a built-in speaker.  
HE-107WX 5.00 Down Net 139.95



**MODEL HT-40K TRANSMITTER KIT**

Specifications: Power Input: 75 watts. Power output: 35 watts CW, 30 watts peak AM phone. Bands: 80, 40, 20, 15, 10 and 6 meters. Tubes: 6DQ5 power output; 6CX8 crystal oscillator — Multiplier — Buffer; 12AX7 speech amplifier; 6DE7 audio amplifier-Modulator 2 silica rectifiers. Controls — Front Panel Function; Band Selector; Drive Control; Plate tuning; plate loading; Crystal — VFO; Grid current; Meter; AC light; RF output. Rear Chassis: Microphone gain; antenna co-ax connector; remote control terminals; AC power cord. Gray steel cabinet 13 1/2"Wx8 1/2"H. Shpg. wt., 20 lbs.  
HE-123WX HT-40K Kit Net 89.95  
HE-124WX HT-40 Factory Wired & Tested Net 109.95



**MODEL SX-140K RECEIVER KIT**

Receiver has high sensitivity and sharp selectivity; RF stage; S-meter; antenna trimmer and crystal calibrator. Tuning rates 25 to 1. Controls: Tuning Antenna Trimmer; Cal. Reset; Function (AC off, standby, AM, CW-SSB); Band Selector; Cal on/off; RF Gain on/off; Selectivity/BFO; Audio Gain; phone jack; S-meter Adj. Tubes: 6AZ8 tuned RF amplifier and crystal calibrator; 6U8 oscillator mixer; 6BA6 IF and BFO, 6T8A 2nd detector, A.V.C., ANL and 1st audio; 6AW8A audio power and S-meter amplifier; 2 silicon rectifiers. Gray steel cabinet 13 1/2"Wx8 1/2"H. Shpg. wt., 15 lbs.  
HE-125WX SX-140K Receiver Kit Net 104.95  
HE-126WX SX-140 Factory Wired & Tested Net 124.95

**FREE** with  
ME-42 KT-77  
REGULAR PRICE 3.40



**NATIONAL NC-60**

National's new all-wave low-priced receiver which features continuous coverage of AM Broadcast, Amateur and World Wide Short Wave Bands. Features include: 4 separate bands—540 Kc-1600 Kc; 1.6-4.5 Mc; 4-12 Mc; 10.5-31 Mc with police, CD, marine, aircraft, amateur, etc. stations clearly marked; plus 0-100 logging and bandspread scale. Bandspread operative on all bands. Audio section drives built-in speaker or front panel phone jack. Has AM, CW switch, standby-receive switch, 2 degrees of selectivity, complement of 4 tubes plus rectifier, superheterodyne circuit. Finish is two tone enamel. Size: 7 3/8 x 8 1/2 x 13 1/2". Shpg. wt., 15 lbs.  
HE-200WX 5.00 Down Net 59.95  
FREE WITH PURCHASE OF NC-60  
KT-77 Shortwave Antenna Kit, plus ME-42 Matching Headset. REGULAR PRICE 3.40  
HE-200WX plus KT-77 plus ME-42 Shpg. wt., 18 lbs.  
SP-178WX 5.00 Down Net 59.95



**EXCEPTIONAL BUYS in**

# MARINE AND HAM Equipment

## NEW! 9-TRANSISTOR *Polaris* TRI-BAND Radio Direction Finder

- COVERS BEACON, BROADCAST AND MARINE BANDS
- INDISPENSABLE NAVIGATION AID
- RUGGED, ACCURATE AND DEPENDABLE
- 9 TRANSISTORS PLUS 1 DIODE PLUS 1 THERMISTOR

The new Model HE-12 "Polaris" is Lafayette's answer to the need for a rugged, accurate radio direction finder at a reasonable price. The "Polaris" eliminates all guesswork from open-water navigation: merely "fix" on any two stations whose locations are known, plot the fixes on your map, and your position is known, quickly and accurately! The 9-transistor superheterodyne circuit runs on four standard flashlight batteries — no external power required! Frequencies are clearly marked on a large 4" to 1" vernier dial.

The "Polaris" covers THREE bands: the low frequency beacon band (200-400 kc); standard broadcast (535-1600kc) and in addition, the 1600-4900 kc marine radiotelephone (and 80 meter amateur) band. Direction finding is accomplished by means of the top-mounted directional antenna, the adjustable compass rose, and the panel meter. A retractable 24" whip is utilized on the marine radiotelephone band. Separate volume and sensitivity controls are provided as well as a button-controlled pilot light, an internal 4" PM speaker and an earphone jack. Audio output is in excess of 200 milliwatts, selectivity is 15-18db at 10kc. Dimensions: 7Hx11Wx 4 3/8"D. Shpg. wt., 10 lbs.

HE-12 WX

Net 79.50

**79.50**

NO MONEY DOWN!  
SEE PAGE 54



### MARINE-POLICE CONVERTER MODEL 3163



**29.50**

Gonset converter operates in conjunction with your present auto radio. It covers the frequency range of 1600 to 3000 kc, which includes various ship-to-shore and ship-to-ship services. Also covered are frequencies used by Police, Coast Guard, Weather, Time, Conelrad, and numerous others.

The full-vision dial has calibrated scale. Installation is simple, and non-technical. A switch-on converter panel gives instant selection of regular broadcast or short wave. Size: 3 1/2" x 4" x 4". Complete with plug and cable. Shpg. wt., 5 lbs. For 12 volt battery system only.

Net 29.50



### NEW! *Sonar* 35-WATT TRANSISTORIZED MARINE RADIO TELEPHONE

complete with antenna, 3 pair of crystals and microphone

**299.95**

Sonar's new Model 30 features six marine channels plus standard tuneable broadcast band. Utilizes high level Class "B" modulation and high level speed limiter. Modulation controlled to 100% to FCC regulations. Efficient push-pull power supply provides over 80% efficiency, with low battery drain. Front panel tuning with antenna RF current indicator. RF sensitivity control. Frequency range for both transmitter and receiver—2000-6000 kc. Sonar antenna network reduces harmonics in excess of FCC requirements. Plug-in push-to-talk mike and plug-in power cable quickly detach. Provisions for remote control. Universal mounting tray for set installation in any position—can be removed quickly. All aluminum, non-magnetic construction treated against effects of salt water and fungus. 12 volts only. Size: 13 1/2" L, 10 3/8" W, 6 1/4" H. Shpg. wt., 15 lbs.

HE-368WX

Net 299.95



### NEW! DRAKE 2B RECEIVER for SSB & AM

A truly versatile receiver with all the advantages of a "Ham Band Only" receiver. Superior SSB, AM, and CW in seven band switch positions PLUS five extra positions for interchangeable plug-in crystals for reception of any 600kc bands in the 3.5 to 30mc range. Features continuous s.d. band selection; distortion-free product detector; series diode noise limiter for AM; high sensitivity; low noise; compact size; 8 front-panel controls; 8 slide switches—12"W, 7"H, 9"D. 120V, 60 cye., 40 W. Shpg. wt., 15 lbs.

HE-180WX

Net 269.95

MODEL 2A Q-Multiplier and Deluxe Speaker. For 2B Receiver

Net 34.95



### "ON THE AIR" ILLUMINATION SIGN

only **6.95**

Privacy in Your Shack When You're "On The Air"

- Easy to Install on Table-Top Or Wall
- Will Match Any Equipment • Uses Long-Life Bulbs
- A simple way to let everyone know you're busy. Connect the leads of this controlled illumination sign to the coil of your antenna changeover relay—flip to transmit and the sign tells them you're "On The Air." Snap-out back plate for easy accessibility. Durable baked black finish in heavy gauge steel. 110V, AC. Size: 10 1/2" L, 3 1/2" H, 3" D. Shpg. wt., 6 lbs.

HE-645

Net 6.95



### LAFAYETTE MODEL HE-11

SPEAKER FOR AMATEUR AND SHORT WAVE RECEIVERS

**7.95**

Efficient and attractive speaker especially designed as ideal mate for communications receivers. 4" speaker housed in handsome, tapered, grey metal cabinet reduces QRM and peaks voice frequencies. Impedance 8 ohms. 7 3/8" x 5 3/8" x 4 3/8" H. Shpg. wt., 4 lbs.

HE-11

Net 7.95

HE-14 Same as above, except 3 2 ohms impedance Net 7.95

### HAMMARLUND RDF-10 RADIO DIRECTION FINDER 179.50



Accurate Radio Fixes for Every Craft

- 3 Bands — Marine, Broadcast and Beacon
- 10 Transistor Circuitry
- Self-Contained Battery Power Supply

The Hammarlund RDF provides all 3 necessary radio bands — standard broadcast, marine band and beacon band. The self-contained power supply operates on six flashlight cells (not incl). Features a built-in, automatic circuit that protects the transistors should batteries be inserted incorrectly. Battery drain less than average flashlight bulb. Directional antenna controlled by front panel knob. Sensing antenna effect results in single sharp lobe for directional antenna. No installation required. Size: 8 1/2" x 11 x 9". Shpg. wt., 12 lbs.

HE-173WX Less Batteries

Net 179.50

BA-156 Burgess #1 Battery 16 req. Net ea. .13

### FAMOUS RAYTHEON DPD-100 DEPTH SOUNDER 119.95



- Transom-Mount Transducer
- Locates Deep Holes or Sunken Wrecks
- Circuitry Box Can Be Installed in Less Precious Space Below Deck

Accurate depth indicator measuring from 1 to 225 ft. Light intensity determines bottom conditions by width of light flash. Gimbal mount permits tilting for greatest visibility. Large 5 1/2" easy-to-read, glare-proof dial. Transom-mount transducer requires no holes through hull. Operates economically from 12V boat power supply 8 1/2" x 3 3/4" x 3 1/2" with 6' power cord.

HE-920WX Shpg. wt., 12 lbs.

Net 119.95

Model DPD-100 As above, but with thru hull transducer, HE-923WX Shpg. wt., 11 lbs. Net 119.95

### NEW! LA-23 WIRELESS BROADCASTER/AMPLIFIER



#### EASY TO INSTALL NO WIRES, JUST TUNE IT

- Modern Styling
- Powerful Signal — Almost 100% Modulation
- Works With All Crystal and Magnetic Mikes and Phono Cartridges
- Plays Through All AM Radios
- No License Required

**14.95**

- As Wireless Broadcaster
- As Audio Amplifier

Treat yourself and your family to hours of fun with this new Lafayette gem. Make your own radio programs, announcements etc., through AM radios anywhere in the house, without wires or extra gadgets. Works like a real station. Designed for simple operation by youngsters or adults, the LA-23 combines in one compact unit a powerful 3-tube wireless broadcaster and an audio amplifier. Operates on any frequency between 900 and 1600 kilocycles, easily tuned to frequency set on your radio dial. It will accept any crystal or magnetic microphone. In addition, the LA-23 may be used directly as a phono or microphone amplifier. No external preamp is required. Simple slide switch permits either form of operation. Just

connect it to a PM Speaker (4-16 ohms). To conform with FCC regulations, the range of the broadcaster is limited to about 50 feet. Within this range however, the unit can provide high quality voice or record broadcasts.

No license or permit is necessary. Complete with instructions. Less Mike. For 105-125V AC or DC, 60 cps. Attractive metal cabinet suitable for any decor. Tubes: 2-50BMB, 1-36AM3. Size: 4Hx8Wx 4 3/8 D. Shpg. wt., 3 lbs.

LA-23

Net 14.95

Crystal microphone for above. Desk or hand held, 8 ft. cable. Shpg. wt., 1 lb.

PA-73

Net 2.95

### VALUES IN ELECTRIC CLOCKS!

#### 24-HOUR STATION CLOCK



TD-2400, self-starting, accurate clock for telling world-wide as well as local time. Calibrated in hours—0100 to 2400 in minutes and seconds. 1 to 60 white graduations. Chrome plated case. U.L. approved. 110-120 V. 60 cye. AC. Shpg. wt., 4 lbs.

ML-82—Net including excise tax 14.85



#### 24 HOUR ELECTRIC WORLD CLOCK

Self starting, accurate electric clock. Tells world-wide and local time. Calibrated in hours—1 to 24, minutes and seconds—1 to 60. Black dial with white graduations. Chrome plated case. U.L. approved. 110-120 V. 60 cye. AC. Shpg. wt., 1 1/2 lbs.

ML-210 including excise tax Net 8.47

#### 24 HOUR "HAM" Station Call Timers



24 hour "Tymeter" digital read-out clock with 10 minutes station call reminder. Buzzer sounds every 10 minutes as a warning to "sign-in" your call letters. Walnut finish case. 4Hx 7 3/4 W x 4 1/4 D. U.L. approved. 110V. 60 cps AC. Shpg. wt., 3 lbs.

ML-216 Net 21.90  
Same as above 12 hour "Tymeter" instead of 24. Net 18.55

## SENSATIONAL LAFAYETTE ANTENNA PACKAGE FOR AMATEURS YOU SAVE 24.56

Reg. Price 133.51 Lafayette Price 108.95

- ON SYSTEM CONSISTING OF:
- CDR AR22 Heavy Duty Automatic Rotor
  - My-Gain TH-3 3 Element Antenna
  - 100' RG8/U Cable
  - 100' Rotor Cable



#### CDR AR-22 AUTOMATIC ROTOR FOR CITIZEN BEAM

This heavy-duty rotor unit will handle antennas up to 150 lbs. Simply set the control unit pointer to the desired direction, and the antenna will automatically rotate to this position and stop. Perfect for TV, Ham or Citizen Band application. Rotor unit employs 12 heavy duty ball bearings in two 6 1/2" races. Weather-proof motor reverses instantly and is factory lubricated for life. Reversible clamps on rotor will take masts from 7/8" to 2". O.D. Control unit is marked in compass points N.S.E.W. NW, NE, SW, and SE. Housed in attractive brown plastic cabinet with rubber feet. Complete with rotor, control unit and instructions. For 110-120 volts 50-60 cps AC. Requires 4 conductor cable.

HE-476WX

Net 31.30

#### NEW! *My-Gain* TH-3 3-ELEMENT ANTENNA

The finest 3-element trap tribander for amateur communications on 10, 15 and 20 meters. All-aluminum construction of 2 OD beams and 1 1/4" telescoping to 3 1/2" OD elements. Plastic and steel gusset bracket assemblies; all steel fixtures and hardware. 100% rust proof. Less than 2 to 1 SWR on all bands. New "solid state" slim traps (1 1/2" in diam.) withstand 1000 watts CW or AM and 2000 watts SSB. Overall beam length 14 ft., longest element 26 ft.

HE-773WX

Net 89.95

WR-131 100-Ft. RG-8/U Coaxial Cable

Net 9.87

WR-151 100-Ft. 4 Cond. Rotor Cable

Net 2.99

#### SPECIAL LAFAYETTE PACKAGE

Includes: AR-22 Rotor; TH-3 3 Element antenna, 100' RG-8 U, 100' 4 Cond. Rotor Cable

SP-228WX Shpg. wt., 61 lbs.

Net 108.95



**8.25**

#### B & W 550A COAXIAL SWITCH

An inexpensive multi-position coaxial switch that eliminates the annoyance of screwing and unscrewing coaxial connections. The B & W 550A permits you to instantly select any one of five transmitters, antennas, exciters,

receivers, and other r-f generating devices using 52 or 75 ohm line. The switch handles up to 1 kw of modulated power with a maximum cross-talk of —45db at 30mc.

HP-91 Shpg. wt., 2 lbs. Net 8.25



# OUTSTANDING VALUES in CITIZENS BAND ACCESSORIES

## LAFAYETTE TELESCOPIC CITIZEN'S

### BAND WHIP ANTENNA

SENSATIONAL VALUE  
IN A DIRECT  
MOUNTING CITIZENS  
ANTENNA

**3.95**



Sturdy, attractive chrome plated whip antenna that telescopes from approx. 45" fully extended to only 15" to facilitate portability and storage. Ideal for shorter distances up to several miles. Has enclosed base loading coil for proper impedance matching. Complete with removable PL-255 connector that permits direct top side or rear mounting to transceiver. Shpg. wt., 1 lb. HE-19 Net 3.95

## Lafayette ALL-IN-ONE CITIZENS BAND MOBILE ANTENNA

THE SCOOP BUY

FOR CITIZENS BAND MOBILES


**6.95**

- PLUS STAINLESS STEEL SPRING
- PLUS 102 1/2" STAINLESS STEEL WHIP FOR OPTIMUM 11 METER PERFORMANCE

Includes—  
● CHROME SWIVEL BASE

Chrome swivel ball mount base designed to be mounted on any surface. Stainless steel spring holds rod in properly adjusted position and prevents rod damage from shocks and blows. Stainless steel whip for maximum resiliency and strength. Shpg. wt., 4 lbs. Has lug terminals for HP-52 cable assembly. HE-800WX Net 6.95

## 20 FT. RF COAXIAL CABLE ASSEMBLIES FOR CITIZENS BAND EQUIPMENT

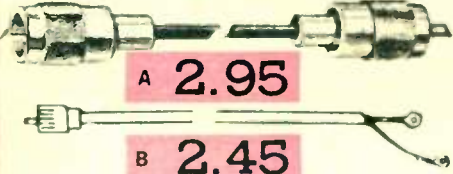

**A 2.95**

**B 2.45**

These cable assemblies are necessary for connection between Citizens Band Transceiver and Antenna. TYPE A—Consists of 20 ft. RG-58/U cable with PL-259 plus UG-175/U on both ends. Required for Ground Plane and Coaxial and Mobile Antennas terminating in a coaxial jack. Shpg. wt., 8 oz. Net 2.95 TYPE B—Same as type A except one end is terminated with PL-259 plus UG-175/U and other end with universal ring type terminal lugs for mobile antennas. Shpg. wt., 8 oz. HE-51 Type A 20 ft. length Net 2.95 HE-52 Type B 20 ft. length Net 2.45

## ANTENNA SPECIALISTS M-38 ISOLATING SKIRT

**11.14**

Isolating skirt for use with Citizen's Band Ground Plane Antennas. Mounts 9 feet (1/4 wave length) below ground plane (ie 27 MC). Lowers angle of radiation and minimizes effect of mounting structure. Improves performance of ground plane. Clamps to 1/4 inch tubing or 1 inch pipe. Shpg. wt., 4 lbs. HE-681WX Net 11.14

## NEW! LAFAYETTE TM-59'er "S" Meter

- NOW FOR HAMS, SWL'S AND CB'ers—A SIGNAL STRENGTH METER USING VTVM PRINCIPLES
- NOT JUST ANOTHER ADJUST CONTROLS
- SENSITIVITY AND ZERO ENCASED METER
- MAGNETIC FEET FOR MOBILE DASHBOARD MOUNTING


The Lafayette TM-59'er "S" Meter was designed for use with most Superheterodyne Citizen Band Transceivers or Communications receivers employing an AVC system. Utilizing a high input wheatstone bridge circuit, NO DETRIMENTAL LOADING EFFECT UPON THE RECEIVER OCCURS. Simple to install—only four leads to connect for input, B+ filament, and ground. Allows accurate measurement of signal strength for the air reports and QSL. Meter calibrated in "Sunits" 1.9 and in db, up to -59. Includes complete wiring diagram and installation instructions. TM-59 Shpg. wt., 1 1/2 lbs. Net 7.95

**7.95**




## NEW! LAFAYETTE RADIO FIELD INDICATOR

With this rugged, new radio field indicator you can check performance of your marine, mobile or fixed transmitter. Features a 200 u meter movement with variable sensitivity control. Earphones can be plugged in for an aural check of output. Antenna extends from 3 1/4" to 10 1/2". Powerful magnet on bottom plate allows easy mounting on car dashboard or metal surfaces. Use anywhere... requires no electricity or batteries. Dimensions: (less antenna) 3 1/4" x 2 1/4" x 2" D. TM-14 Net 6.95 High output crystal earpiece for use with TM-14. MS-439 Net 1.04

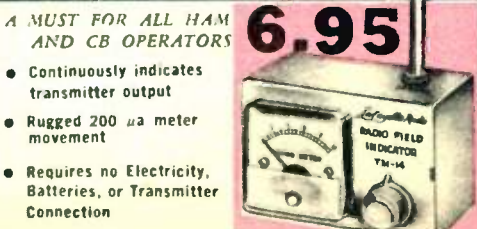

**A MUST FOR ALL HAM AND CB OPERATORS**  
**6.95**  
● Continuously indicates transmitter output  
● Rugged 200 u meter movement  
● Requires no Electricity, Batteries, or Transmitter Connection

## POPULAR COMPONENTS FOR THE 11 METER CITIZENS BAND KIT BUILDER

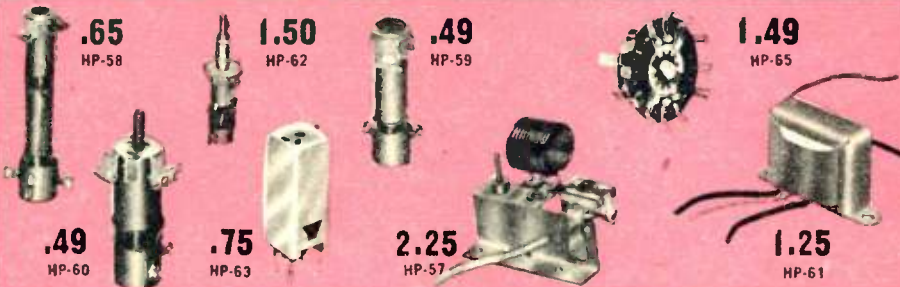

Lafayette offers to the citizens band kit builder and repairman these hard-to-get and most frequent-in-demand components for the construction and repair of the most popular Class D Citizens Band transceivers. All components are of assured quality and dependability.

**TVI TRAP COIL**—Suppresses Television Interference from Citizens Band Transceivers. Coil for use with 50 ufd capacitor in a parallel tuned circuit. Shpg. wt., 4 oz. HP-59 Net .49

**RECEIVER OSCILLATOR COIL**—For use with tuneable citizens band receiver with IF Frequency at 1650 KC. Shpg. wt., 4 oz. HP-62 Net 1.50

**TRANSMITTER OSCILLATOR COIL**—For use as oscillator plate tank coil in citizens band transmitters using 6AU8, 6AW8 and 6CX8 type tubes. Shpg. wt., 4 oz. HP-60 Net .49

**1650 KC INTERMEDIATE FREQUENCY TRANSFORMERS**—For use in any citizens band receiver utilizing 1650KC IF Frequency and in conjunction with the above oscillator and RF coils. Shpg. wt., 8 oz. HP-63 Net .75

**PI-NETWORK ASSEMBLY**—From Lafayette HE-20A. Consists of mounting bracket, Final Coil, 10 ufd plate capacitor, 330 ufd output capacitor. Shpg. wt., 8 oz. HP-57 Net 2.25

**OUTPUT AND MODULATION TRANSFORMERS**—From Lafayette Citizens Band Transceivers. Shpg. wt., 1 lb. HP-61 To match 6AQ5 as modulator and 3.2 ohm voice coil as used in the HE-20A Net 1.25 HP-64 To match 6V6GT as modulator and 3.2 ohm voice coil as used in the HE-15A Net 1.50

**RECEIVER RF COIL** For transformer coupling and RF stage to the mixer stage. Two windings (individually slug-tuned)—one for RF Amplifier Plate circuit, second for Mixer Grid Circuit. Shpg. wt., 4 oz. HP-58 Net .65

**TRANSMIT — RECEIVE — TRANSMIT SPRING RETURN SWITCH** A 4-pole 3 position switch for use in citizens Band switching circuit. Position 1 — Transmit (locks); Position 2 — Receive; Position 3 — Transmit, with spring return, for short periods of transmissions. Shpg. wt., 6 oz. HP-65 Net 1.49

## MARK MOBILE HELIWHIP & MOUNT

The HW-11-4 "Heliwhip" is a fiberglass molded, continuously loaded whip antenna, four feet in length for the 11 meter Citizen Band. The HW-11-4 mounts in a HW-M1 molded mount or can be used with any good commercial mobile ball mount which will accept the 3/8" - 24 thread HE-895-W HW-11-4 Fibre Glass Antenna. HE-895 W HW-11-4 Fibre Glass Antenna Net 9.95 HE-895 HW-M1 Antenna Mount for HW-11-4 Net 7.50

## PHILMORE CITIZEN'S BAND CLASS "D" RADIO KIT

3 CRYSTAL CONTROLLED TRANSMIT-RECEIVE CHANNELS FOR BUSINESS/HOME, COMMERCIAL, FARMS, BOATING.

Designed so that anyone can build it without previous electronic knowledge or skill. Receiver and transmitter individually tuned to pre-arranged frequencies. Transmitter crystal controlled with .005% accuracy, and delivers maximum voltage permitted by FCC. Sensitive superregenerative receiver. Has built-in trap to eliminate T.V. interference. Mobile unit operates on 6 or 12 volts DC interchangeable from cigarette lighter socket. Low, flat, modern appearance makes it ideal for home, office or mobile use.

Complete with 5 tubes, one crystal for any of the 3 channels incorporated, microphone, cabinet and appropriate power supply and power cord. Size 10Wx 4 1/2"x10 1/2" Deep. Shpg. wt., 12 lbs.

Model TC11 For 115 Volt AC, less antenna Net 39.95 HE-580 2.00 Down  
Model TC612 For 6 and 12 Volt DC, less antenna Net 44.49 HE-581 2.00 Down  
Model TC15 7-Section Whip Antenna with base loading coil, for short range communication. HE-582 Shpg. wt., 2 lbs. Net 4.50

## CITIZENS TRANS-I-CHECK

The Transcheck is a test instrument to check power output and antenna efficiency of Citizens Band Transmitters. Can be used for resonating or tuning transmitter power output plate circuit, and adjusting antenna loading capacitor for maximum output. Incorporates a sensitive indicating meter with dual scales: Upper scale indicates match or mismatch of line to antenna, lower scale indicates power output. Grey hammer-tone aluminum case measures 4 1/2"x2 1/4"x1 1/2" D. Shpg. wt., 3 lbs. Model CB-52-C. With Coax connector. Net 19.95 HE-190  
Model CB-52-S. With auto spade connector. Net 18.95 HE-191

## JOHNSON AUTO OR MARINE NOISE SUPPRESSOR KIT

● A must for Mobile CB Operators  
● 16 Component Parts Plus Wire

An easy to install kit that will effectively suppress ignition noise. Kit consists of 8 spark plug suppressors; 1 distributor suppressor; 1 voltage-regulator suppressor; 4 coaxial capacitors; shielded cable and braid for wiring filter system. All necessary hardware and instructions for installation on any make of car. Shpg. wt., 2 lbs. HE-450 Net 13.50


## CITIZENS BAND RADIO HANDBOOK

192-page book about Citizens Band Radio and how to select, install, operate, and maintain all types of CB gear. A Howard W. Sams Photofact Publication for all present, and potential, owners of CB equipment, and service technicians who install or maintain CB gear. Written by David E. Hicks. BK-321 Postpaid in U.S.A. Net 2.95

## INTERNATIONAL CRYSTAL NEW 1960 CLASS "D" CITIZENS BAND CALL AND HANDBOOK

NEW! SUPPLEMENT NO. 2 CALL BOOK. Approximately 50,000 calls issued from July 1, 1960 to January 1, 1961. Latest, up-to-date Citizens Band Info. BK-1322 Postpaid in U.S.A. Net 3.95

## MOSLEY A-311 3-ELEMENT CITIZEN'S BAND BEAM ANTENNA



**36.75**

● Durable Light Weight Aluminum  
● Delivers the Equivalent Power Input of 40-Watts from your 5-Watt Citizens Band Transmitter

Unequaled point-to-point communications for Citizens Band operators. 9.3 db gain over dipole means the effective radiated power is multiplied by 8. This means your 5 watt Citizens Band Transmitter can actually achieve a legal effective power input of 40 watts. Boom is 12' long with maximum mounting ratio of 9.5 ft. Requires 1 1/4" mast and RG-8/U or R9-58/U Cable. Lugs are supplied for the other end. Shpg. wt., 30 lbs. AN-57WX 2.00 Down Net 36.75

## CDR AR-22 AUTOMATIC ROTOR FOR CITIZENS BEAM

This heavy-duty rotor unit will handle antennas up to 150 lbs. Simply set the control unit pointer to the desired direction, and the antenna will automatically rotate to this position and stop. Perfect for TV, Ham or Citizen Band application. Rotor unit employs 12 heavy duty ball bearings in two 6 1/2" races. Weather-proof motor reverses instantly and is factory lubricated for life. Reversible clamps on rotor will take masts from 7/8" to 2" O.D. Control unit is marked in compass points N.S.E.W. NW, NE, SW, and SE. Housed in attractive brown plastic cabinet with rubber feet. Complete with rotor, control unit and instructions. For 110-120 volts 50-60 cps AC. Requires 4 conductor cable. HE-476WX 2.00 Down Net 31.30  
4-Conductor cable for HE-476WX rotor WR-24 ea. ft. Net .03; 100 ft length Net 2.39

## LAFAYETTE GENERATOR NOISE FILTER

● Frequency Range 3-30 mcs  
● Maximum Current 25 Amps  
● Adjustable  
● Simple to install

Eliminates whining and grinding noises created from generator brushes. Enables quiet receiver operation for Citizens Band, Amateur and industrial frequencies. Standard frequency range 3-30 mcs. Maximum current 25 amps. Installs quickly and easily. Shpg. wt. 1 lb. CF-135 Net 2.49

## CITIZENS BAND CONNECTOR ADAPTERS

29-786 ADAPTER  
Adapts an SO-239 Socket to a Standard auto radio (Motorola type) socket. HP-53 Net .44

29-782 ADAPTER  
Adapts a PL-259 Plug to a standard auto radio (Motorola type) plug. HP-54 Net .44

## BLITZ BUG LIGHTNING PROTECTOR

Designed to fit any standard coaxial cable, the "Blitz Bug" employs the spark gap principle to eliminate static build up on coaxial cables. Provides a constant drain off, reducing chances of a direct lightning strike and in many cases eliminating noise problems. Constructed of 3/4" O.D. brass by 2 1/4" long. Employs one PL-259 plug and one DKCB connector (takes PL-259 plug.) Shpg. wt., 1 lb. HP-50 Net 3.95

## PHANTOM ANTENNA LOAD

A 52 ohm non-inductive antenna load. Ideal for testing and repairing citizens band transceivers. Can be used as coax line terminator. Power rating adequate for any 5 watt Citizens Band transceiver. Enables compliance with FCC regulations regarding tune-up and adjustment of transceivers. Shpg. wt., 1 lb. HE-842 Net 1.49

## GENERATOR REGULATOR FEED-THRU NOISE SUPPRESSORS .95


These 3-terminal network feed-thru capacitors act as extremely effective R.F. filters above 2 MC. Eliminates and suppresses the majority of noises due to regulators and generators interfering with 27MC citizens band frequencies. Rated .1 MFD/600 Volts DC 20 Amps.

Feed-Thru Suppressor (Screw Terminals) 1 1/4" Diam. x 1 1/4" length Shpg. wt., 4 oz. SF-221 Net .95  
Feed-Thru Suppressor 1 1/4" Diam. x 1 1/4" length Shpg. wt., 4 oz. SP-222 Net .95

## RF COAXIAL CONNECTORS

Stock No. Type Description Net  
SP-174 PL-259 Male conn. For direct connection into transceiver or antenna .59  
SP-175 UG-175/U Reducer—Adapts PL-259 to RG-58/U Diam. .16  
SP-176 PL-258 Junction Adapter—Accepts PL-259 on both ends for cable extension .89

# LAFAYETTE RADIO ENGINEERED FOR SUPREMACY

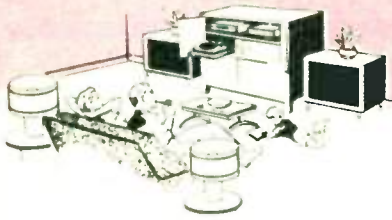

REPORT FROM AN "INDEPENDENT TESTING LABORATORY". The best "independent testing laboratory" in the whole world is your own living room—because it represents the actual conditions under which you will listen to your hi-fi system.

**"Let Your Own Ears be the Judge"**



A LOW, LOW PRICE!  
**99.50**  
5.00 Down  
STEREO AMPLIFIER

CHECK LAFAYETTE FEATURES AGAINST AMPLIFIERS COSTING UP TO **199.50**

- 50 WATTS MONAURAL—25 WATTS EACH STEREO CHANNEL • RESPONSE 15-40,000 CPS ± .5 DB (at normal listening level) • UNIQUE "BLEND" CONTROL • PREMIUM EL86 OUTPUT TUBES • SEPARATE BASS & TREBLE CONTROLS • CLUTCH-TYPE VOLUME-BALANCE CONTROL • 3RD CHANNEL OUTPUT

The best instruments for you to judge sound quality are your own ears—because sound is a very personal thing.

So, if you wish, read the so-called "Best Buy Reports," remembering that they do not consider your desires, your ears, the characteristics of your home and your pocket book.

We at Lafayette are conscious of all these factors and invite you to either visit our sound salons if you are able to do so, or to avail yourself of Lafayette's "LISTEN AT HOME GUARANTEE" described on the next page

**breathhtaking performance at a price only LAFAYETTE can offer.**

The Stereo 250A... a completely new stereo high fidelity amplifier with a high quality of reproduction, remarkable versatility and new distinctive styling—worthy of a place in the finest stereo hi-fi music system. A full range of controls enables you to enjoy the utmost in listening pleasure in any situation. A unique "blend" control which provides continuously variable channel separation—from full monaural to full stereo—may be used to eliminate the exaggerated channel separation found in some stereo source material. Included is a clutch-type Volume Balance control for independent or simultaneous control of both channels, concentric Bass and Treble controls which provide independent tonal control of each channel and a 4-position switch which selects phono, tuner, auxiliary or tape head stereo inputs. Simple slide switches provide channel reversal and phase reversal—or you can reproduce either channel through both amplifiers. A loudness switch permits the volume balance control to function as a compensated loudness control. The LA-250A also features a 3rd channel output which may be used to feed a Tape Output jack for recording purposes, plus dual terminations for 4, 8 or 16 ohm speakers.

Advanced circuitry includes DC operated preamp and tone control tube treatments for hum-free operation, 6CW5 EL86 push-pull output tubes, individual bias and balance adjustments on each channel and a hum balance control.

**SPECIFICATIONS:**

POWER OUTPUT & DISTORTION: 50 watts—25 per channel = 1 db at less than 1% Total Harmonic Distortion at 1 KC. Less than 0.25% Total Harmonic Distortion at 1 KC at normal listening level. 1 watt, less than 0.5% 1M distortion at normal listening level. FREQUENCY RESPONSE: 15-40,000 cps ± 0.5 db at normal listening level. HUM & NOISE: 70 db below rated output at max. volume (high level inputs). SENSITIVITY: For full output high level inputs 0.5V Mag. Phono 3.5 MV at 1 KC. CHANNEL SEPARATION: Greater than 55 db at 1 KC; greater than 45 db from 20-20,000 cps. IMPEDANCE: 4, 8 and 16 ohms per channel. POWER: 200 watts. 110-125V AC 50-60 cycles. Attractive beige vinyl laminated steel case. Handsomely designed three color brass etched front panel. Sienna brown milled legs and matching knobs with polished brass inserts. Dimensions with legs and knobs, 14 1/2" w x 12 3/4" d x 5 1/2" h. Shpg. Wt., 28 lbs.  
LA-250AWX 5.00 Down Net 99.50

## LAFAYETTE 50-WATT STEREO AMPLIFIER Model LA-250A

Impressive Performance... Handsome Styling

... Another Unbeatable Lafayette

**Value!**


MADE IN U.S.A.

*Clutch-Type Volume-Balance Control*—Provides precise effective means of controlling volume and balancing stereo channels.

*Dual Preamp Section*—Inputs have been provided for every stereo-aural function.



### New H. H. SCOTT MULTIPLEX FM TUNER MODEL 350

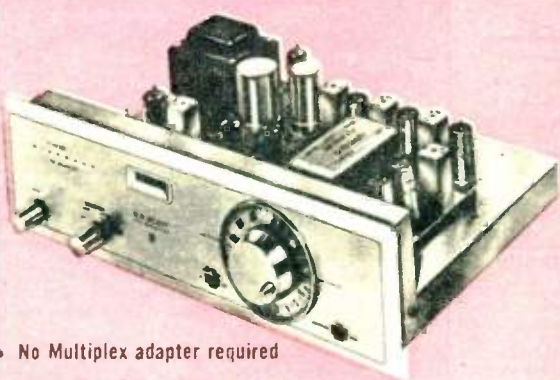

• No Multiplex adapter required

**199.50**

Now that compatible stereophonic FM broadcasting has been approved by the F.C.C., Scott is introducing a tuner specifically for multiplex. No multiplex adapter required—channel separator is incorporated. Silverplated input section. 2 Mc wide-band detector, subchannel and normal channel noise filters contribute to its performance. Controls: level mode selector, stereo noise filter switch, and multiplex—mono switch and tuning. For accurate tuning, a signal strength meter is used. Usable sensitivity: 2.5 uv (IHFM rating). Harmonic distortion: 0.8%. Frequency response: ± 1 db, 30-15,000 cps (IHFM rating). Signal to noise ratio: 60 db, 3 IF stages, 2 limiting stages, 10 tubes and 11 diodes. For 105-125 volts 50-60 cps. Dimensions in optional accessory case: 15 1/2" x 4 1/2" x 12 1/2". Shpg. wt., 10 lbs.

G-630WX Model G Leatherette steel case for above. Shpg. wt., 11 1/2 lbs. Net 199.50  
G-147W Net 12.95

### New H. H. SCOTT MULTIPLEX ADAPTER Model 335



**99.95**

Owners of all H. H. Scott wideband tuners (models 300, 310, 311, 320, 330, 331, 339 and LT-10) can now enjoy FM multiplex stereo reception by adding the Model 335 Wideband Multiplex Adapter to their system. The 335 approved for use under the recent FCC multiplex ruling is recommended for use only with H. H. Scott wideband tuners. Proper stereo performance and operation cannot be guaranteed with any other make tuner. Completely self-powered, the 335 utilizes external connections to the tuner so as not to affect tuner alignment. Provision has been made to switch the 335 adapter out of the stereo system to allow unaffected normal reception from AM-FM units.

CONTROLS: Selector Off Mono FM Multiplex Stereo with Sub Channel Noise Filter. Level Adapter Defeat Stereo Noise Filter. Dimensions in accessory case which matches H. H. Scott tuner in height and styling: 5 1/4" H x 13" D For 105-125 VAC. Shpg. wt., 9 lbs.  
G-626WX Supplied less case: 5.00 Down Net 99.95  
Model H Metal Case Net 9.95  
G-627W Model HW Walnut Wood Case Net 14.95  
G-628W Model HW Mahogany Wood Case Net 14.95  
G-629W Net 14.95



### FISHER HI-FI COMPONENTS

REVERBERATION

BY FISHER  
THE K-10 SPACEPANDER



5.00 Down

**69.50**

Add concert hall realism to your living room or listening area. The Fisher K-10 supplies the reverberation heard in an acoustically perfect concert hall, but generally absent in recording studio and the average home listening area. Used for both monophonic and stereo system. Spacepander can be connected to any signal within the range of 0.5 to 2 volts and provides a 33 millisecond time delay. A front panel control is connected to the unit by a 4 ft cable thus permitting convenient cabinet or console mounting. The amount of reverberation is variable from zero to 80%, with the reverberated sound mixed with the original signal when the control is turned. Push-pull operation of the control knob allows the user to remove reverberation without disturbing the established optimum setting. Tubes 2-12AX7, 1-7247 plus a selenium rectifier. Size 9 1/2" x 1 1/2" x 6 7/8" H. Shpg. wt., 8 lbs.  
G-129 5.00 Down Net 69.50

NEW! A FIRST FROM LAFAYETTE

THE FISHER  
MPX-100 STEREO  
MULTIPLEX  
ADAPTER



**89.50**

5.00 Down

Completely self-contained and self powered, the new Fisher MPX-100 is designed to bring FCC approved multiplex reception to all Fisher tuners and receivers including other makes employing wide band design and containing a multiplex output. Unit is equipped with a special "Stereo Beacon" circuit which automatically signals the moment the station tuned begins broadcasting in stereo. A standby position allows listening to monaural FM program material, at the same time enabling the "Stereo Beacon" to function. Other features include: Front panel Stereo Balance control provides easy adjustment for optimum balance. Selector Switch with feed-through facilities permit use of only one pair of cables leading to the amplifier section, thus frequently eliminating the need for separate AUX inputs and an extra AC power outlet. Supplied with 3 cables and an attractive vinyl-clad case. Front panel is finished in brushed brass. Size: 12" D x 4 7/8" x 4 7/8". Shpg. wt., 10 lbs.  
G-118WX 5.00 Down Net 89.50

# THE DYNAMIC BRILLIANCE of STEREO!

The Smart Way To Buy HI-FI

**"LISTEN AT HOME GUARANTEE"**  
 Prove to yourself in your own living room, that the hi-fi system you select sounds as good at home as it does in our show-room.  
**LISTEN at HOME and BE SURE!**  
 With Lafayette's Famous 15 Day FREE Trial if not completely satisfied with your purchase once you get it home, you can return it within 15 days and get your Full Purchase Price returned to you, less only transportation charges.

## A NEW COMPLETE STEREO SYSTEM BASED ON THE Superb LA-250A



Made in U.S.A.

LAFAYETTE LA-250A 50-WATT STEREO AMPLIFIER



LAFAYETTE SK-58 FREE EDGE 12" COAXIAL SPEAKERS




GARRARD RC210

PICKERING 380C CARTRIDGE



SHURE M7D CARTRIDGE

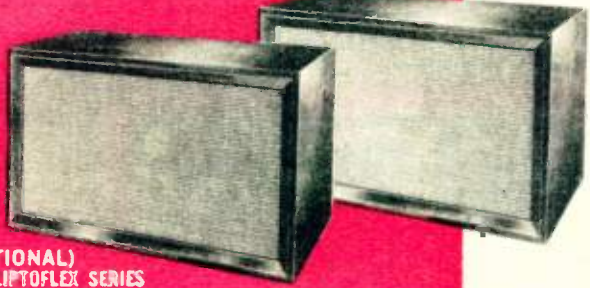

(OPTIONAL) LAFAYETTE ELIPTOFLEX SERIES BOOKSHELF ENCLOSURES

ONLY 5.00 DOWN

**YOU SAVE 42.30** **194.50**

Add a new dimension of music with all the excitement and realism of a live concert. The new Lafayette LA-250A 50-watt stereo amplifier forms the heart of this outstanding stereo hi-fi music system—the features, versatility and advanced circuitry of this unit are second to none. A unique blend control allows continuously variable channel separation from full monaural to full stereo. Also included is the famous Garrard RC 210 intermix 4-speed automatic record changer with manual or automatic operation, supplied with your choice of stereo cartridges—the new Pickering 380C (7 Mil) diamond stereo cartridge or the Shure M7D (7 Mil) diamond stereo cartridge. The Lafayette wood base, cut for the RC 210, is supplied in your choice of finishes.

These outstanding components are coupled with the 2 famous free-edge Lafayette SK-58 12" coaxial speakers with built-in cross-over network and brilliance level control. System supplied with plugs, cables and easy-to-follow instructions. Shpg. wt., 67 lbs.

HI-FI STEREO PHONO SYSTEM with choice of Pickering 380C or Shure M7D cartridge and mahogany, walnut or blonde changer base (please specify).

HS-103WX 5.00 Down Net 194.50

Same as HS-103WX, plus 2 Lafayette Eliptoflex Series Bookshelf Enclosures finished on 4 sides (specify finish). Shpg. wt., 143 lbs.

HS-104WX 10.00 Down Net 257.50

Same as HS-103WX except speakers furnished are the new Lafayette SK-180 10" 3-way speakers. Shpg. wt., 67 lbs.

HS-105WX 5.00 Down Net 198.50

Same as HS-105WX, plus 2 Lafayette Eliptoflex Series Bookshelf Enclosures (specify finish). Shpg. wt., 143 lbs.

HS-106WX 10.00 Down Net 261.50

STEREO AM-FM PHONO SYSTEM. Same as HS-103WX plus Lafayette LT-50 FM AM stereo tuner. Shpg. wt., 35 lbs.

HS-107WX 10.00 Down Net 309.50

**MATCHED COMPONENTS**

LAFAYETTE LA-250A 50-WATT STEREO AMPLIFIER	99.50
GARRARD RC210 4-SPEED RECORD CHANGER	44.50
PICKERING 380C DIAMOND STEREO CARTRIDGE	29.85
LAFAYETTE WOOD CHANGER BASE	3.95
2 LAFAYETTE SK-58 FAMOUS FREE EDGE 12" COAXIAL SPEAKERS @ 29.50 EACH	59.00
<b>Regular Catalog Price</b>	<b>236.80</b>

**CHOICE OF RECORD CHANGER** • You may substitute the Garrard RC88, II changer at an additional cost of \$15.00.

**SELECT YOUR OWN CARTRIDGE** • You may substitute the Audio Empire 108 Cartridge at an additional cost of \$3.50, or the Shure M3D for an additional \$12.00.




### MARANTZ MODEL 7C STEREO CONSOLE PREAMPLIFIER

Combines Marantz's remarkable quality construction with complete versatility and ease of operation. Controls feature: 8-pos. Selector (Mic, Phono 1, Phono 2, Tapehead, FM-AM

Multiplex, TV Auxiliary, 5-pos. Mode Selector Volume, Balance, 4-Independent Base and Treble Tone Controls, Record Equalizer, Tape Playback on Monitor, High Filter, Rumble Filter and Power Switch. Frequency Response: 1/2 db 20-20,000 cps. 1M. Distortion: 0.1%. Total Noise: 80 db below 10 mv phono input with P1AA curve. 14 1/2" x 5 3/4" x 8 1/2" D. For 110-120V. 50-60 cycle AC. Shpg. wt., 16 lbs.  
 G-251WX Marantz Model 7C-Less Cabinet 10.00 Down Net 249.00  
 WOOD CABINET FOR ABOVE: Specify Mahogany, Blonde, Walnut, Oiled Walnut.  
 G-253W Shpg. wt., 4 lbs. 2.00 Down Net 24.00  
 MARANTZ MODEL 8A. Dual 30-watt stereophonic power amplifier (not shown).  
 G-250WX Less cabinet Shpg. wt., 55 lbs. 10.00 Down Net 237.00

### Jensen TF-3 3-WAY SPEAKER SYSTEM

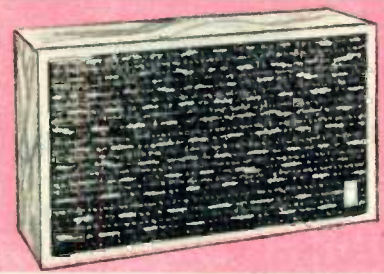

AS LOW AS **79.50**

Smooth response from 25 cycles to inaudibility using 4 speakers. 10" Flexair woofer has a 1 lb. Alnico V magnet. 2-3 1/2" midrange units are positioned for maximum spread. Super tweeter has a spherical sector element. Power rating 25 watts, 50 watts peak. Impedance 8 ohms. Size 13 1/2" x 23 3/4" x 11 1/4" D. Shpg. wt., 38 lbs.  
 GB-226WX TF-3 Unfinished 5.00 Down Net 79.50  
 TF-3 in Oil Walnut Finish.  
 GB-227WX 5.00 Down Net 99.50


### Lafayette Presents THE AUDIO DYNAMICS ADC-1 STEREO CARTRIDGE



TRACKS AT LESS THAN 1 GRAM

Designed for complete compatibility with the finest stereo equipment, the ADC-1 has set a new standard for stereo cartridge performance. By utilizing an extremely small dynamic mass for its moving system the ADC-1 overcomes the need to damp its resonance mechanically. Pickup distortion is reduced to the point where it is negligible with channel separation —30db from 50-7,000 cps. Tracking as low as 1/2 gram, the ADC-1 achieves a compliance of 20x10<sup>-6</sup> cms/dyne thus reducing record wear to the vanishing point. Frequency response is 10 to 20,000 cps ± 2db. The cartridge is equipped with 4 pin connectors to accommodate 3 or 4 lead connections. Cartridge is encased in gold plated mu-metal shield. Designed to fit all standard 1/2" and 3/4" mounting centers—adapts to virtually all tone arms.  
 GD-340 Net 49.50  
 ADR-R1 diamond replacement stylus assembly for ADC-1 cartridge.  
 GD-341 Net 25.00

### KLH MODEL EIGHT FM RECEIVING SYSTEM "TOP RATED"

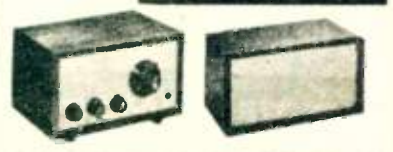

- Not A Radio, But a Complete FM Music System
- A Full Range of Inputs
- Attractive Solid Walnut Cabinets

An entirely new concept in QUALITY FM reception. The Model Eight consists of two separate but electronically integrated units housed in two solid walnut cabinets, each of which measures 10 1/4" x 5 3/4" x 6 1/2" D. One of these encloses the FM Tuner-amplifier chassis. The other constitutes a wide-range loudspeaker system in a sealed enclosure. They are connected by a 30' cable which can be coiled on the back of the speaker cabinet. Output jacks on the back of the tuner-amplifier chassis are provided for addition of a multiplex adapter, and for use of the tuner section alone with a tape recorder or an external amplifier and speaker. Additional terminals permit substitution of an external 300 ohm antenna for the built-in antenna. Separate controls on the front panel of the tuner-amplifier section perform the following functions: on-off, treble, volume, and tuning. Each tuner is individually temperature compensated to insure freedom from drift. Tube complement: 1-6BS8, 1-6U8, 3-6AU6, 2-6BM8, 2-germanium diodes and 1-silicon power rectifier. Fully transformer operated; requires 110-120V, 60 cps AC. Attractive satin walnut finish. Shpg. wt., 15 lbs.  
 G-360WX 5.00 Down Net 159.00  
 Model 8 Preamplifier—Enables you to use your present record changer or turntable with the model 8FM Receiving System.  
 G-361 (Not Illustrated) Net 19.00

### McIntosh MC-240 80-WATT STEREO AMPLIFIER



The use of patented Unity Coupled circuits with bifilar output transformers results in clean power output throughout the audio range and beyond. Conservatively rated at 40 watts per channel (stereo), and 80 watts single channel (monaural). H.D. is less than 0.5% at rated output. IMDistortion is less than 0.5% at twice rated output. A balance control for stereo channels is provided. Sensitivity: a single channel input of 0.5 volts or dual channel stereo input of 2.5 volts produces full output. Input impedance is 250,000 ohms. Frequency response is ± 0.1 db from 20-20,000 cps and ± 1.0 db from 15-60,000 cps at full power output. Hum and noise is better than 90 db below rated output. Output impedances (stereo): 4, 8, 16, 125 and 600 ohms; (mono): 2, 4, 8, 16, 32, 62 and 300 ohms. Chrome and black finish. 16 1/2" x 10 1/2" x 7 1/4". Power consumption 270 watts, 105-130 volts 50/60 cycles AC. Shpg. wt., 56 lbs.  
 G-179WX 10.00 Down Net 288.00  
 MCINTOSH C20-A. Stereo Preamplifiers (not shown). Shpg. wt., 19 lbs.  
 G-170WX Less cabinet 10.00 Down Net 234.00

### GRADO LABORATORY SERIES STEREO TONE ARM



**39.50**  
 2.00 Down **TOP RATED**

A superb instrument designed for the ultimate in stereo performance. Constructed of the finest hand-rubbed gumstock walnut with metal fittings of machined aluminum. Features include separate balance adjustments for the vertical and lateral plane of arm movement. A precise micrometer tracking force adjustment is accurate to the tenth of a gram. Total length of the arm is 11 1/4" with a minimum of rear overhang. Supplied completely wired to the preamp, with no soldering necessary. Shpg. wt., 3 lbs.  
 GD-163 2.00 Down Net 39.50

# THE NEW LAFAYETTE LA-240 40-WATT STEREO AMPLIFIER

...A Complete STEREO CONTROL CENTER

UNSURPASSED CONSTRUCTION and PERFORMANCE

Dual 20-Watt Power-Amplifiers Dual Stereo Preamplifier  
One Handsome Compact Unit

Outstanding  
QUALITY  
and VALUE!

Only  
**79.95**  
5.00 DOWN



### SPECIFICATIONS

Power Output and Distortion—20 watts per channel at less than 1% total harmonic distortion at 1 Kc. Less than 0.25% total harmonic distortion at 14 watts; less than 0.12% at 1 watt. Intermodulation Distortion: 0.75% at 1 watt; 34% at 10 watts. Frequency Response: 12 to 100,000 cps ± 1 db at 1 watt; 50 to 70,000 cps ± 1 db at full output. Sensitivity: For full output: High Level inputs 0.75v Mz inputs 5.5 Mv at 1 Kc. Tone Control Range: Treble: 12 db boost/cut at 10 Kc. Bass: 15 db boost/cut at 50 cps. Hum and Noise: Zero volume hum: 80 db below rated output. Maximum volume hum: High level inputs, 78 db below rated output; Mag. Phono inputs, db below rated output. Outputs: Dual 8 and 16 ohm impedance speaker outputs, Dual Tape outputs. Tube Complement: 4—6BQ5/EL82—6BL8/ECF80, 3—12AX7/ECC83, 1—GZ34/5AR4.

- Concentric Volume Balance Control
- Less Than 1% Harmonic Distortion at Rated Output
- Hum & Noise 80 db Below Rated Output
- Frequency Response: 12-100,000 cps ± 1 db at 1 Watt
- Variable Separation Control Eliminates Exaggerated Channel Separation
- Dual Concentric Bass & Treble Controls
- High Sensitivity Allows Use With All Stereo Cartridges

Quality, Design and Performance That Are Remarkable—The Lafayette LA-240 represents the highest standards of stereophonic amplifier design—literally creating a new meaning for excellence. Use of the most advanced engineering techniques and finest components have resulted in a powerful 40-watt stereo amplifier incorporating two 20-watt power channels and dual preamplifier. A level of flexibility and performance have been achieved that can only be compared with units twice its price.

### COMPARE THESE FEATURES

**Separation Control**—Provides continuously variable channel separation from full stereo to full monaural, thus insuring the correct degree of stereo separation for individual listening tastes and room acoustics.

**Independent Tone Controls**—Concentrically mounted bass and treble controls for each channel.

**Volume—Balance Control**—Individual level controls for each channel.

**Loudness Switch**—Allows the volume controls to function as compensated loudness controls and provides the frequency response changes required by the ear at low listening levels.

**Rumble Filter**—Reduces rumble from a noisy turntable with a minimum effect on program material.

**Mode Switching**—Ch. A and Ch. B slide switches provide for normal stereo, reverse channel, mono-aural A or mono-aural B.

**Selector Switch**—Instant selection of Aux, Tuner, Phono or Tape Head inputs—non-shorting position permits recording and playback using a permanently connected tape recorder.

**Hum Balance Controls**—Individual hum balance controls for each channel located at the rear for fast, easy minimum hum adjustment.

**Full Range of Inputs & Outputs**—Inputs: (5 stereo pairs) Dual Aux—Dual Tuner—Dual Ceramic Phono—Dual Mag. Phono—Dual Tape Head. Outputs: Dual Tape Out—Dual 8 and 16 ohm speaker terminals.

**Superb Low Silhouette Styling** makes the LA-240 an amplifier you'll be proud to display. Gold finish cover is set off by an ivory and gold front panel with gold metal knobs. Complete with cage and legs. Overall Dimensions: 14" W x 10" D x 5 1/2" H. For 115V AC operation. Power consumption: 25 watts. Shop, now! Net 79.95



Individual Hum Balance Controls for Each Channel



Full Range of Inputs and Outputs



Separation Control from Full Stereo to Full Monaural Volume-Balance Control for Each Channel

## LAFAYETTE COMPLETE STEREO PHONO SYSTEM

### COMPONENTS

LAFAYETTE LA-240 40-WATT STEREO AMPLIFIER	79.95
GARRARD RC-210 4-SPEED RECORD CHANGER	44.50
WOOD BASE FOR RC-210 (Specify Finish)	3.95
NEW PICKERING 380C DIAMOND STEREO CARTRIDGE	29.85
2-LAFAYETTE SK-128 FULL RANGE 8" BIAXIAL SPEAKERS	39.00
<i>Regular Catalog Price</i> 197.25	

LAFAYETTE SYSTEM PRICE **162.50** YOU SAVE 34.75  
5.00 DOWN

Complete stereo phono system as listed above, with choice of the Pickering 380C or Shure M3D stereo cartridge.  
**HS-225WX** Shpg. wt., 50 lbs. 5.00 Down Net 162.50  
 Same as HS-225WX with the addition of 2-Lafayette "Mini-Duct" Bookshelf Enclosures finished on 4 sides (Specify Walnut or Mahogany Finish) Net 207.50  
**HS-226WX** Shpg. wt., 95 lbs. 5.00 Down Net 207.50  
 Same as HS-225WX with 2 Lafayette "Triplex" SK-180 10" 3-Way speakers. Net 182.50  
**HS-227WX** Shpg. wt., 55 lbs. 5.00 Down Net 182.50  
 Same as HS-227WX with 2 Eliptoflex Bookshelf Enclosures finished on 4 sides (Specify Mahogany, Walnut, Oiled Walnut or Blonde Finish) Net 245.50  
**HS-228WX** Shpg. wt., 103 lbs. 10.00 Down Net 245.50  
 Same as HS-225WX but with 2-Lafayette Famous SK-58 2-way speakers. Net 178.50  
**HS-229WX** Shpg. wt., 58 lbs. 5.00 Down Net 178.50  
 Same as HS-229WX with 2 Eliptoflex Bookshelf Enclosures finished on 4 sides (Specify Mahogany, Walnut, Oiled Walnut or Blonde Finish) Net 241.50  
**HS-230WX** Shpg. wt., 106 lbs. 10.00 Down Net 241.50


SELECT YOUR OWN CARTRIDGE • You may substitute the Audio Empire 108 Cartridge at an additional cost of \$3.50, or the Shure M3D for an additional \$17.00.



Choice of one PICKERING 380C or SHURE M3D



LAFAYETTE LA-240 AMPLIFIER

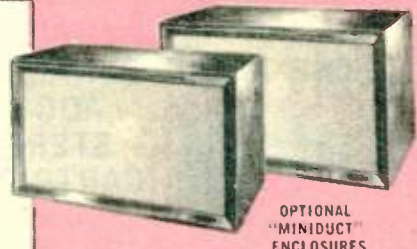

OPTIONAL "MINIDUCT" ENCLOSURES



GARRARD RC-210 with BASE

**NEW!** **McIntosh**  
MC 75.  
75 WATT  
POWER  
AMPLIFIER

The MC75 is a new outstanding amplifier. The utilization of a new trifilar wound primary in the output transformer, and time-proven design features make this power amplifier exceedingly free of distortion and noise output. Conservatively rated at 75 watts continuous output with less than 0.5% harmonic and intermodulation distortion. Frequency response is +0db-0.1db, 15-40,000 cps at 75 watts and +0db or better. Output impedance 250,000 ohms sensitivity 0.5 to 30 volts adjustable with gain control. Requires 117/125 V. AC at 240 watts. Size: 16 1/2" x 8 1/2" x 3 1/2". Shpg. wt., 49 lbs. Net 229.50

**SHERWOOD S-5000II**  
72-WATT STEREO AMPLIFIER

Features the same circuits and controls of the highly rated S-5000. Provides power to drive any of the popular low-efficiency speakers. Features dual loudness, bass and treble controls—one knob varies both channels simultaneously. . . pull out the knob to vary each channel separately. 30 watts, 110-120 V. AC, 50-60 cycles. 14 x 14 1/4 x 4". Shpg. wt., 39 lbs.

G-296WX Less Case	5.00 Down	Net 199.50
G-283W Brown Flextone Case for S5000II		Net 5.00
G-284W Black Flextone Case for S5000II		Net 5.00

**NEW! SPEAKER SYSTEMS**  
by **H. H. SCOTT**

**MODEL S-2 PROFESSIONAL SPEAKER SYSTEM** as low as 179.95 5.00 down

**MODEL S-3 WIDE-RANGE SPEAKER SYSTEM** as low as 114.95 5.00 down

H. H. Scott's remarkable new speaker system designed for use where virtual recreation of the original sound is desired. This four-driver, acoustic compliance system consists of a low resonance, high excursion woofer, two dual-cone mid-range units, and a special wide dispersion spherical tweeter mounted in a matched cabinet. Mid-range units are acoustically isolated to eliminate undesirable coupling and intermodulation. Impedance 16 ohms. Overall size: 23 1/2" H, 14 1/2" W, 12 1/2" D. Shpg. wt., 48 lbs.

GB-550WX Oiled Walnut	5.00 Down	Net 199.95
GB-551WX Mahogany	5.00 Down	Net 199.95
GB-552WX Fruitwood	5.00 Down	Net 199.95
GB-553WX Unfinished	5.00 Down	Net 179.95

A true bookshelf speaker offering outstanding smoothness and absence of coloration of program material. The S-3 is a three-way acoustic compliance system consisting of a specially designed, low resonance woofer, a mid-range unit and a wide-dispersion super-tweeter, mounted in a matched enclosure. The unique high frequency design permits the full range to be clearly heard throughout most of the room, instead of being confined to a small critical space. Size: 23 1/2" H, 11 1/2" W, 9 1/2" D. Shpg. wt., 37 lbs.

GB-554WX Oiled Walnut	5.00 Down	Net 129.95
GB-555WX Mahogany	5.00 Down	Net 129.95
GB-556WX Fruitwood	5.00 Down	Net 129.95
GB-557WX Unfinished	5.00 Down	Net 114.95



Amazing Values!

# LAFAYETTE FM-AM STEREO TUNER

## MODEL LT 80 FM TUNER



**Pin-point tuning accuracy** is provided by this precision tuning meter; evaluates relative strength of the incoming signal... invaluable when tuning weak stations.

GUARANTEED FOR ONE FULL YEAR AGAINST DEFECTS IN WORKMANSHIP AND PARTS.

**49<sup>50</sup>**  
A LOW, LOW PRICE! 2.00 DOWN

- ARMSTRONG CIRCUIT FOSTER-SEELEY DISCRIMINATOR AND DUAL TUNED LIMITERS
- EXTREMELY SENSITIVE—1.5 UV FOR 20DB QUIETING
- 10-TUBE PERFORMANCE—8 TUBES (2-DUAL PURPOSE)
- 20-20,000 CYCLES ± 1/2 DB • AFC
- AFC DEFEAT • SUPERB LOW SILHOUETTE STYLING

Remarkable... quality, performance and styling that is in every respect the equal and in many instances superior to tuners priced far above the modest cost of this instrument. The same sensitive FM circuit employed in the LT-77 AM-FM Stereo Tuner (Specifications as listed on right) has been incorporated in the LT-80... designed and constructed of the finest components, with jewel like precision (each unit is hand wired) in order to insure that each tuner will maintain its excellence year after year with a minimum of maintenance. Making every attempt to anticipate the requirements of the future, Lafayette designers have included a **multiplex output** for the new stereo F.M. broadcasts. Controls consist of On-Off; FM; FM AFC and FM MEX. Flywheel action tuning control provides velvet-smooth tuning action. Tube compliment consists of 2-6AQ8, 26BA6, 2-6AP6, 1 each 6AL5 and 6X4. Handsome low silhouette enclosure will do justice to any decor. Beautifully finished in gold and white with contrasting black dial face. Complete with cage and legs. Dimensions: 11 3/8" W x 8" D x 4 1/2" H Legs add 3/4" to height. Shpg. wt., 11 lbs. NET 49.50

LT 80 FM STEREO TUNER

2.00 Down

NET 49.50

**WEAK SIGNAL—STRONG SIGNAL**  
Lafayette's separate, precision twin-tuning meters for FM and AM insure pin-point tuning accuracy every time.



## MODEL LT 77



GUARANTEED FOR ONE FULL YEAR AGAINST DEFECTS IN WORKMANSHIP AND PARTS.

- 14 TUBE PERFORMANCE—10 TUBES (2-DUAL PURPOSE) + RECTIFIER + DIODE & 2-TUNING METERS
- ARMSTRONG CIRCUIT WITH DUAL TUNED LIMITERS AND FOSTER-SEELEY DISCRIMINATOR • FM AFC AND AFC DEFEAT • EXTREME SENSITIVITY AND WIDE FREQUENCY RESPONSE • TUNED GROUNDED GRID R.F. STAGE ON AM & FM • MULTIPLEX OUTPUT • FLY WHEEL TUNING • AM FEATURES BROADBAND TUNED I.F. STAGE • 2-3 GANG CONDENSERS • VOLUME-BALANCE CONTROLS FOR AM & FM

**74<sup>50</sup>**  
AN OUTSTANDING VALUE! 5.00 DOWN

... Simplicity, flexibility and superb styling have been carefully integrated in this quality instrument. Offering tremendous versatility, the LT-77 will receive the new simultaneous FM-AM stereophonic broadcasts or since the FM and AM sections are completely independent, the tuner may also be employed for FM or AM reception separately. Designed with the future in mind... a multiplex output has been included for the new stereo F.M. Each unit has been hand wired and individually laboratory tested. Controls provide for every tuner function. On-off power switch; Separate AM/FM flywheel tuning; Individual AM/FM volume controls; Choice of AM, FM, FMAFC or stereo reception. FM circuitry features Armstrong grounded grid low noise front end and triode mixer coupled with tuned dual limiters. Foster-Seeley discriminator with AFC and AFC defeat. FM Sensitivity of 1.5 uv for 20 db quieting insures long range reception. Superhet AM circuit with 3 stages AVC and ferrite loopstick antenna. Individual 3-gang tuning condenser and tuned RF stages for both AM & FM sections. **Selectivity:** FM 200 KC band width; 6 db down, AM 8 KC BW; 6 db down. **Frequency Response:** FM 20-20,000 cps ± 1/2 db. AM 20-5,000 cps ± 3 db; **Harmonic Distortion** under 1% on FM; under 1% on AM for up to 80% modulation. **Hum Level—**60 db. **Image Rejection:** FM, better than 40 db AM 70 db. **I.F. Rejection:** FM 70 db, AM 50 db Radiation meets FCC requirements. Tubes: 2-6AQ8, 4-6BA6, 2-AUG, 1 each 6BE6, 6AL5 and 6X4 plus diode detector. Antenna Input: 300 ohms. Superbly styled low silhouette enclosure finished in gold and white with easy to read black dial face. Complete with cage and legs. Dimensions: 14 1/2" W x 4 1/2" H x 10 1/2" D Feet add 3/4" to height. Shpg. wt., 16 lbs. NET 74.50


LT 77 AM-FM STEREO TUNER

5.00 Down

NET 74.50

## New! LAFAYETTE LA-55 15 WATT MONAURAL AMPLIFIER

The Most Extraordinary Hi-Fi Value Ever!

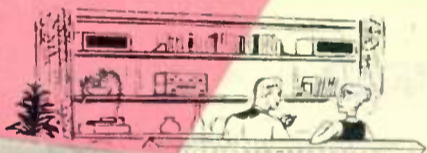

- FREQUENCY RESPONSE: 15-30,000 CPS • POWER OUTPUT 15 WATTS • SENSITIVITY: 3 MV MAG. PHONO • HUM 65 DB BELOW RATED OUTPUT • HARMONIC DISTORTION LESS THAN .3% • 5 INPUT CHANNELS • RUMBLE FILTER • EL84 OUTPUT TUBES IN PUSH-PULL • BEAUTIFULLY STYLED

Outstanding Performance and Engineering + Beautiful Styling + Unbeatable Price—add up to make the Lafayette LA-55 truly the finest HI-FI monaural amplifier value today... Beautifully styled in gold and white, the LA-55 easily adapts to any room decor. Perfect for that music system in your living room, finished basement, store or office. Ruggedly constructed, this fully integrated amplifier-preamplifier employs premium quality EL84 tubes in push-pull and advanced circuitry for faithful reproduction of all monophonic sources... perfect for use as a second amplifier for stereo or for starting out monophonically and adding stereo at a later date. Engineered to include every practical feature making a worthwhile contribution to hi-fi reproduction... **SPECIFICATIONS:** Power Output 15 watts. Institute of High Fidelity Manufacturers Rating (30 watts peak). Frequency Response 15-30,000 cps ± 1 db (at normal listening level); Sensitivity: For full power, High level inputs 0.5v. Mag. phono 3 mv. Hum and Noise: Volume control at max. High level inputs 65 db below rated output. Mag-Phono 55 db below rated output. Harmonic Distortion less than .3%. Inputs: Total 5—Aux, Tuner, Mag. Phono, Crystal Phono, Tape Head. Outputs: Tape Out, 4, 8 and 16 ohm speaker terminals. Tubes: Total of 5 plus rectifier—2-EL84, 1-6BL8, 1-AUG, 1-12AX7, and 1-6CA4/WZ81. Controls: Monitor; On-Off; Volume Power On-Off; Base; Treble; Rumble Filter. Hum balance control. Selector: 2-position, Aux, Tuner, Phono, Tape Head. Complete with removable case and legs. AC receptacle on rear of chassis. Dimensions: 13 3/4" W x 4" H x 8 1/4" D. Knobs extend 3/4" in front of panel. Shpg. wt., 20 lbs.

LA-55WX

2.00 Down

Net 44.50

**44<sup>50</sup>**

AN UNBEATABLE VALUE! 2.00 DOWN

## LAFAYETTE SUPER-VALUE HIGH-FIDELITY PHONO SYSTEM

### COMPONENTS

LAFAYETTE LA-55 15 WATT COMPLETE AMPLIFIER	44.50
NEW PICKERING MODEL 380C (.7 MIL) DIAMOND CARTRIDGE FOR STEREO AND MONAURAL RECORDS	29.85
GARRARD RC210 4-SPEED RECORD CHANGER	44.50
WOOD BASE FOR RC210 (Specify mahogany, blonde or walnut)	4.50
LAFAYETTE SK-128 FULL RANGE 8" BIAxIAL SPEAKER	19.50

LAFAYETTE SYSTEM PRICE **109.50** Regular Catalog Price 142.85 YOU SAVE 33.35

- Complete monaural system as above with choice of Pickering Model 380C Cartridge or Shure M7D Cartridge. Specify cartridge choice. HS-300WX Shpg. wt., 39 lbs. 5.00 Down Net 109.50
- Same system as HS-300WX, with the addition of Lafayette's Amazing "Mini-Duct" Bookshelf Enclosure (Specify Finish). HS-301WX Shpg. wt., 62 lbs. 5.00 Down Net 132.00
- Same system as HS-300WX, but with famous Lafayette SK-58 free-edge 12" 2-way speaker. HS-302WX Shpg. wt., 45 lbs. 5.00 Down Net 119.50
- Same system as HS-302WX, with the addition of the revolutionary "Eliptoflex" Bookshelf Enclosure (Specify Finish). HS-303WX Shpg. wt., 69 lbs. 5.00 Down Net 154.50
- Same system as HS-300WX, with the addition of the Lafayette LT-80 FM Tuner. HS-304WX Shpg. wt., 56 lbs. 5.00 Down Net 159.00
- Same system as HS-302WX, with the addition of the Lafayette LT-80 FM Tuner. HS-305WX Shpg. wt., 80 lbs. 5.00 Down Net 169.00



LAFAYETTE LA-55



PICKERING 380C

SHURE M7D



GARRARD RC210

WOOD BASE

SK-128 8" BIAxIAL SPEAKER



"MINI-DUCT" BOOKSHELF ENCLOSURE



LAFAYETTE LT-80



# LAFAYETTE STEREO KITS TRIED, and ACCLAIMED by ENGINEERS, MAGAZINES

## LAFAYETTE STEREO TUNER KIT

• THE MOST FLEXIBLE TUNER EVER DESIGNED!



MADE IN U.S.A.

**KT-500A**  
**74.50**  
IN KIT FORM

**LT-50**  
**124.50**  
COMPLETELY WIRED  
AND TESTED

- MULTIPLEX OUTPUT FOR NEW STEREO FM
- TWO PRINTED CIRCUIT BOARDS AND IF'S PREALIGNED
- FM AFC AND AFC DEFEAT 17 TUBE PERFORMANCE
- 11 TUBES (4 Dual-purpose) + Tuning Eye & Selenium Rectifier
- ARMSTRONG CIRCUIT WITH DUAL LIMITERS AND FOSTER-SEELEY DISCRIMINATOR

**SPECIFICATIONS** FM CIRCUIT: Armstrong, low noise front end with triode grounded grid amplifier and triode mixer. Double tuned dual limiters. Foster-Seeley discriminator, AFC and AFC defeat. AM CIRCUIT: Superhet with 3 stages AVC, 10kc whistle filter, ferrite antenna. **DISTORTION:** Under 1% harmonic on FM; under 1% on AM for up to 80% modulation. **HUM LEVEL:** 60 db below 100% modulation. **SENSITIVITY:** FM—full limiting on signals as low as 1 uv, 2 uv for 30 db quieting; AM Terminal Sensitivity 5 uv. **SELECTIVITY:** FM 200kc bandwidth; 6 db down, AM 8kc BW; 6 db down. **FREQUENCY RESPONSE:** FM 20-20,000 cps ± 1/2 db, AM 20-5,000 ± 3 db. **IMAGE REJECTION:** FM 40 db; AM 30 db. **I. F. REJECTION:** FM 70 db, AM 50 db. **CONTROLS:** 5 controls, FM VOL, AM VOL, FM Tuning, AM Tuning, and five position function selector switch. **TUBES:** 3-6BA6, 2-6AU6, 1 each 6BK7B, ECC85, 6AL5, 6BE6, 12AU7 and 6U5 tuning eye. Selenium rectifier. **OUTPUT IMPEDANCE:** Low impedances cathode follower. Output jacks for FM, AM or Stereo. **ANTENNA INPUT:** 300 ohms. Size 13 3/4" W x 10 3/8" D x 4 1/2" H. Shpg. wt., 18 lbs. Kit comes complete with all parts and metal cover, a step-by-step instruction manual, schematic and pictorial diagrams.

Over a year of research, planning and engineering went into the design of this superb Stereophonic Tuner. Designed against obsolescence, it incorporates every practical and worthwhile feature necessary for all present and future types of broadcasting. The KT-500 will receive simultaneous FM and AM stereo broadcasts or since the two sections are completely independent it may be utilized for normal FM or AM reception. The Tuner also provides an output for the new multiplex FM stereophonic reception. Apart from its unique flexibility, the KT-500 offers noise-free, drift-free, distortion-free performance the equal and in many instances superior to the highest priced tuners. It has been engineered without compromise of any kind—only the finest component parts have been employed. Each FM & AM section is tuned with its own 3-gang tuning capacitor and is provided with individual cathode follower outputs. This means that long output cables can be used to connect tuner to amplifier or control center without fear of high frequency loss. Also, separate volume controls are provided for each channel so that when used for stereophonic reception, a proper balance between channels can be achieved. Convenient front panel switch changes from stereo to monaural use. Simplified accurate knife-edge tuning is provided by magic eye which operates independently on FM and AM. Automatic frequency control "locks in" FM signal permanently. Ferrite rod antenna with loading ring is supplied to bring in weak AM stations for quality reproduction. Designed for easy assembly, the kit is built around two printed circuit boards and prealigned IF's insuring fast accurate construction even for the beginner. Beautifully styled, the KT-500 is finished with a copper anodized aluminum front panel plus matching maroon knobs with copper inserts set in a beige finished vinyl enclosure.

MODEL KT-500AWX Stereo Tuner Kit	5.00 down	Net 74.50
LT-50AWX Same as above, completely wired and tested	5.00 down	Net 124.50

**hi-fi music**  
AT HOME

"The assurance of success lies in the excellent design of this tuner, the thoughtful manner in which it was planned for assembly from a kit of parts, the use of RF and IF printed-circuit boards, the FM sections, and the very complete illustrations and instructions. You will have reason to be proud and pleased with the results."

**Radio-Electronics**

"The KT-500 tuner has a number of interesting construction and design features not usually found in moderately priced tuner construction kits."

Comments from the **CRITICS** and **TECHNICAL PRESS!**

**audiocraft**  
for the **hi-fi** hobbyist

"... low distortion on the FM channel and excellent sensitivity of the tuner as a whole combines with simplicity of construction to make the KT-500 a pleasure to build and use."

**LETTERS!**  
Here are a few of the **MANY** we get...

**COMMENTS on the KT-500**

"Instructions superb. As an electronics advisor on the staff of one of the Bell system companies, I find this an excellent unit, comparable to units at three times the price."  
**B. Spring**  
Portland, Oregon

"I am enjoying my KT-500 more and more each day. It works beautifully and meets, if not exceeds, all your specifications. A friend of mine, after seeing and hearing my KT-500, has decided to order one for his Hi-Fi unit."  
**Charles Bell**  
St. Louis, Mo.

"I thoroughly enjoyed building this kit. It proved to be worthy of all my expectations. I am very pleased with its performance. Keep up the good work!"  
**John Kinney**  
Santa Monica, Calif.

**COMMENTS on the "STEREO 236"**

"Excellent instructions. You gave me a real bargain."  
**Dr. Jack McKenty**  
Marshfield, Wisc.

"Instructions excellent and very complete. Very quiet with good quality and gain. This unit is a terrific value for the money—for the price I don't see how the unit can be improved. Excellent as is."  
**T. E. Anderson**  
Darien, Conn.


"The unit is proving to be superior to any unit in its price range."  
**Sam Seales**  
Eagleville, Tenn.

"This is one of the best, if not the best, presentation I ever saw. The large scale sheets are wonderful. The KT-236 played well on first trial."  
**Richard C. Monges**  
Tenafly, N. J.

## The Amazing "STEREO 236" KIT



Made in U.S.A.  
**Model KT-236A**  
IN KIT FORM



- Deluxe Stereo Controls**
- 1 3-position Selector switch
  - 2 Dual concentric Bass control
  - 3 Dual concentric Treble control
  - 4 Concentric clutch-operated Volume control
  - 5 Unique "Blend" control
  - 6 Phase reverse switch
  - 7 Mode switches

- 18 Watts per Channel • Response 15 to 30,000 cps
- Unique "Blend" Control for Variable Channel Separation
- Concentric Clutch-Operated Volume Control
- Inputs for Stereo and Monophonic Sources

**ONLY**  
**59.50**  
5.00 DOWN

## Lafayette's 36 Watt STEREO AMPLIFIER

The Best Value **ANYWHERE!**  
A NEW LOW-COST STEREO AMPLIFIER ANYONE CAN BUILD

Fine wide-range stereo reproduction can be yours when you build this easily constructed 36 watt stereo amplifier (18 watts each channel). The KT-236A provides all the necessary inputs—lets you connect your stereo or monophonic sources permanently, with instant selection provided by the turn of a switch. Has built-in dual preamps for low level phono inputs—RIAA equalized for flat response. It includes a unique "Blend" control which provides continuously variable channel separation from full monophonic to full stereo—you select the exact degree of separation you want. Other features are: Concentric clutch-operated Volume control for independent or simultaneous level adjustment of both channels; Dual concentric Bass and Treble controls—give you 4 independent tonal adjustments; 3-position Selector Switch—Aux-Tuner-Phono; Mode (2 Slide Switches) provide Normal Stereo, Reverse channel, Mon A and Mon B; Phase switch—makes up for reversed-phase recordings sometimes found commercially and also corrects for speakers connected out of phase.

**SPECIFICATIONS**

**POWER OUTPUT:** 36 watts—18 watts per channel ± db. Institute of High Fidelity Manufacturers Rating (72 watt peak). **FREQUENCY RESPONSE:** 15-30,000 cps ± 1 db at normal listening levels. **SENSITIVITY:** For full output; High level inputs 0.5v; Mag. Phono 3 mv. **DISTORTION:** Harmonic, less than 0.15% at normal listening level; IM, less than .3%. **HUM AND NOISE:** (At full volume) High level inputs 70 db below rated output; Mag. phono 53 db below rated output. **CHANNEL SEPARATION:** Better than 50 db. **SPEAKER OUTPUT IMPEDANCE:** 8 and 16 ohms. **INPUTS:** (Total 8) Dual Aux, dual Tuner, dual Crystal Phono, dual Mag. Phono. **OUTPUTS:** (Total 4) Dual main speaker output, dual Tape Out jacks. **TUBE COMPLEMENT:** 4-EL84, 2-7199, 3-12AX7 plus 2 silicon diodes. Attractive beige vinyl laminated steel cabinet. Hand-somely designed brass anodized aluminum front panel. Sienna brown molded legs, matching knobs with polished brass inserts. 14 1/4" wide x 11 1/2" deep x 5 1/2" high (with legs and knobs). Shpg. wt., 24 lbs.

**MODEL KT-236AWX**—36 watt integrated Stereo Amplifier Kit, complete with deluxe cabinet and legs, all necessary parts and detailed assembly manual.

5.00 down	Net 59.50
-----------	-----------

# TESTED, APPROVED STEREOPHILES, and KIT-BUILDERS

**Easy to Build!**

Anyone can build these superb Lafayette stereo kits—no special skill is needed. Assembly manuals contain clearly worded step-by-step instructions which guide you all the way. Large full-scale pictorial illustrations every stage of assembly show you exactly where every part goes. Join the thousands who have already discovered this easy low cost way of owning the finest audio equipment.



## Now From Lafayette... THE REMARKABLE KT-650 FM TUNER KIT

PROFESSIONAL FM LABORATORY STANDARD PERFORMANCE



KT-650  
IN KIT FORM

**54<sup>50</sup>**

LT-650  
FACTORY WIRED  
AND TESTED

**79<sup>95</sup>**

5.00 DOWN

Made in U.S.A.

- Low Noise Front End With Triode Grounded Grid Amplifier and Triode Mixer
- Double Tuned Dual Limiters and Foster Seeley Discriminator
- 11 Tube Performance—8 Tubes (3 dual purpose) + Tuning Indicator and Silicon Diode Rectifier
- Frequency Response  $\pm 1/2$  db 15-35,000 cps
- Variable AFC Literally "Locks In" Stations
- Sensitivity 3 uv for 20 db of Quieting
- Multiplex Output For Stereo FM
- Electronic Bar Tuning Indicator Tube
- Pre-Aligned IF and Discriminator Coils
- 3 Gang Tuning Condenser

Lafayette proudly presents the KT-650 FM Tuner Kit. This is a remarkable instrument—the product of an extensive research and engineering program, designed to produce a no-compromise FM Tuner Kit capable of achieving the highest Laboratory Standards. The KT-650 ranks with the very finest FM Tuners... Lafayette engineers have succeeded in developing an instrument with performance and flexibility that equals and surpasses factory-wired or kit tuners many times its modest cost.

The KT-650 incorporates every desirable FM Tuner feature. A Multiplex jack at the rear of the tuner provides for addition of a Multiplex Adapter for future FM Stereo Reception. (Multiplex FM is still in the development stage). Flywheel weighted tuning enables effortless station-to-station tuning. Pinpoint tuning accuracy is assured by a special electronic bar tuning indicator tube that indicates maximum closure at the point of best tuning. A variable AFC (Automatic Frequency Control) is featured. Once properly tuned, the AFC literally "locks in" the station and is adjustable for tuning weak stations adjacent to strong stations. The convenient front panel Tuner Level Control allows precise adjustment of the Tuner output level.

Superb circuitry features a low noise front end with triode mixer plus double tuned dual limiters and wide band Foster Seeley discriminator. Sensitivity of the KT-650 is such that in many areas the only antenna needed will be a short piece of wire, except of course in remote locations. Plate follower outputs permit using the tuner up to 50 feet from the amplifier. Lafayette Kit Research makes doing-it-yourself a pleasure. Time-saving printed circuit boards are utilized to make wiring errors almost nonexistent. Alignment is a critical factor that directly affects the quality of reception in FM Tuners. The KT-650 is provided with IF and discriminator coils that have been carefully factory prealigned—permits you to play the tuner as soon as assembly is completed.

More than just mere electronics, the KT-650 is a tuner you'll be proud to display. The superbly styled low silhouette enclosure will do justice to any decor. Beige cover is set off by a Cream and Sienna Brown etched panel and knobs with contrasting Black Dial Face. Complete with cage and legs. Overall Dimensions: 14x5<sup>1/2</sup>x11<sup>1/2</sup>". For 117V, 50-60 cycle AC. Power consumption 40 watts. Shpg. wt. 13<sup>1/2</sup> lbs.

KT-650WX FM Tuner Kit Net 54.50  
LT-650WX Factory Wired and Tested Net 79.95

Comments from the  
**CRITICS and  
TECHNICAL  
PRESS!**

**MORE  
LETTERS  
out of  
THOUSANDS!**

ALL ABOUT Hi-Fi Enclosures  
**POPULAR  
ELECTRONICS**

"If you haven't yet gone stereo—or if you're looking for a 'best buy' to replace your present stereo amplifier—the Lafayette KT-250A kit is a good bet."

**AUDIO**

"In the Lafayette KT-250A, the design has been simplified greatly and without eliminating any of the desired functions—so much so that one is inclined to wonder why anyone didn't think of it before. Certainly the system provides adequate flexibility for most any ordinary home use."

Virtually Distortionless Performance — Less than .15% Distortion at 100% Modulation

**STAND OUT FEATURES OF THE KT-650**

**EASY FLYWHEEL TUNING**—Smooth, effortless tuning from one station to another.

**MULTIPLEX AND MAIN OUTPUTS**—Plate follower main output allows connection of tuner up to 50 feet from amplifier. Multiplex output for future FM stereo.

**FRONT PANEL LEVEL CONTROL**—Provides precise control of your tuner output level.

**VARIABLE AFC**—"Locks in" the station for positive drift free reception of both weak and strong signals.

**high fidelity**

"It incorporates just about all the features one could expect to find on a single chassis."

"The Lafayette KT-650 offers quality circuitry at low cost."

### COMPARE THESE SPECIFICATIONS:

Sensitivity: 3 microvolts for 20 db of quieting. Usable Sensitivity: 16 microvolts latest IHFM Tuner standard. Image Rejection: 66 db. AM Suppression: 48 db. Discriminator Linearity: 600 kc. Distortion and Noise: Better than 57 db below 1.5 volts at 100% modulation. Frequency Response:  $\pm 1/2$  db from 15 to 35,000 cps with a standard 75 microsecond de-emphasis network. Audio Output: 1.75 volts at 75 KC deviation (100% modulation). Antenna Input: 300 ohm. Controls: Tuning Level, AFC Control and Power Switch. Outputs: (2) Multiplex Adapter Amplifier. Tube Complement: ECC85, 6BK7B, 6AL5, 2-7543, 2-6BA6, 6AV6, EM84 Electronic Bar Tuning Indicator Tube and a silicon diode rectifier.

### COMPLETE WITH THESE LAFAYETTE KIT EXTRAS

Attractive Low Silhouette Enclosure — Adds protection and beauty to your tuner — an additional charge with most manufacturers included with the KT-650.

Alignment Tools — Included to help keep your KT-650 at peak performance.

Interconnecting Cables & Plugs

Indoor Folded Dipole Antenna — In most locations this is the only antenna the KT-650 requires.

### COMMENTS on the KT-650

"In this era of loose claims by many reputable manufacturers, you may feel a deep sense of pride in producing this kit. Every claim you made is true."

George F. Schaefer  
Ramsey, N. J.

"The KT-650 performed as beautifully as it went together."

Curtis Frets  
Ontario, Calif.

"I congratulate you people on the tremendous job you have done with this FM tuner."

Donald MacKenzie  
Marlboro, Mass.

"A pleasure to build."

Francis J. Crowley  
Hempstead, N. Y.

### COMMENTS on the KT-250

"I am more than satisfied with the results. Money-wise and performance-wise I couldn't ask for more."

Dick Korda Jr.  
Euclid, Ohio

"I wish to commend the staff who designed this kit. I think it is one of the best planned, best organized kits I have ever seen."

Robert Fitz  
Columbus, Ohio

"Overall, I think the kit to be complete in every detail so that even a novice could build one of your kits. I was well pleased with the presentation of the kit as a whole."

Charles Wehrheim  
Ft. Lauderdale, Fla.

"Best amplifier on the market for the price."


Merl Powell  
Dayton, Ohio

## NEW! The OUTSTANDING "STEREO 250" KIT

LAFAYETTE'S 50-WATT INTEGRATED STEREO AMPLIFIER

### SPECIFICATIONS

**POWER OUTPUT:** 50 watts (100 watts peak) 25 watts per channel  $\pm 1$  db. **DISTORTION:** Total Harmonic Distortion  $\pm 1$  db at less than 1% at IKC at normal listening level (3 watt) 1 M. Distortion less than 0.5% at normal listening level. **FREQUENCY RESPONSE:** 15-40,000 cps  $\pm 0.5$  db at normal listening level, 20-50,000 cps  $\pm 1$  db at rated output. **HUM & NOISE:** Zero volume hum 77 db below rated output; max volume hum high level inputs 70 db below rated output; Mag phono inputs 50 db below rated output. Sensitivity for full output high level inputs 0.5V; Mag phono 3.5 MV at IKC. **CHANNEL SEPARATION:** Greater than 55 db at IKC greater than 45 db from 20-20,000 cps. **SPEAKER AUXILIARY OUTLET:** 1 switched. **TUBE COMPLEMENT:** 4-6CW5 EL86, 2-7199, 312AX7, 3 Silicon diodes. **IMPEDANCE:** 4, 8 and 16 ohms per channel. **POWER:** 200 watts; 110-125V AC 50-60 cps.



The new Lafayette KT-250A provides a quality of reproduction, remarkable versatility and distinctive styling that represent the finest quality kit value in its class. Designed and engineered for ease of assembly, the KT-250A is a fine stereo preamplifier and 50 watt stereo amplifier integrated into one superb instrument. Whether you use it as a stereo amplifier delivering 25 watts per channel or as a powerful 50 watt monophonic amplifier, you are assured of true high fidelity reproduction—free from hum, noise and distortion. Features provided are: Unique Separation Control which provides continuously variable channel separation—from full monophonic to full stereo. Clutch-Operated Volume Balance Control gives a choice of independent or simultaneous control of both channels, 4 Independent Concentric Tone Controls for Bass and Treble Adjustment of each channel; Mode Switching—Two slide switches provide Normal Stereo or Reverse Channel. Input Selector—4 position switch lets you select instantly any one of your connected

monophonic or stereo sources; Loudness Switch; Phase Switch; 3 Pairs of High Level Inputs; 2 Pair of Low Level Inputs; Tape Output and Bridged Output—A monophonic blend of both channels which can be fed to a third single channel power amplifier and speaker for a greater sound spend in stereo. Advanced audio circuitry includes DC operated preamp and tone control tube filaments for hum-free operation, premium 6cw5 EL86 push-pull output tubes, individual bias and balance adjustments on each channel and a hum balance control.

Supplied with an attractive beige vinyl laminated steel case with legs and contrasting gold, white and maroon front panel, all necessary parts and detailed assembly manual. Size 14<sup>1/2</sup>" W x 12<sup>3/4</sup>" D x 5<sup>1/2</sup>" H with legs and knobs. Shpg. wt., 28 lbs.

KT-250A WX Net 74.50  
5.00 down

Model  
KT-250A  
IN KIT  
FORM


**74<sup>50</sup>**



MADE IN U.S.A.

- Two 25 Watt Channels, 50 Watt Monophonic Output
- Response 15 to 40,000 cycles
- Third Channel Output
- New 6CW5/EL86 Output tubes
- Full Range of Controls and Inputs
- New Distinctive Styling
- Individual Bias and Balance Adjustments

# LAFAYETTE Criterion STEREO COMPONENTS

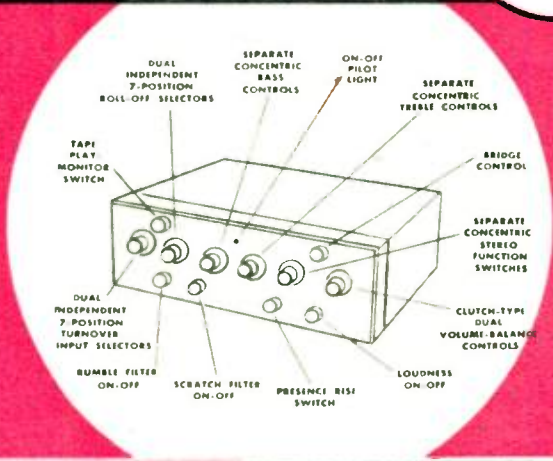

**NO TECHNICAL SKILL NEEDED TO ASSEMBLE!**

## KT-600A LAFAYETTE STEREO PRE-AMPLIFIER MASTER CONTROL CENTER




Made in U.S.A.

With All The Versatility Of A Broadcast Studio Control Console

Patents applied for on Bridge and Null Balance circuitry

**ASSURANCE OF COMPONENT QUALITY**  
ONE YEAR PARTS GUARANTEE  
All components in this unit are conservatively engineered to operate well within their performance capabilities. As assurance of this quality, Lafayette guarantees all parts including tubes for one year.



**MODEL KT-600A**  
**79.50** 5.00 DOWN  
IN EASY-TO-BUILD KIT FORM

**LA 600A** COMPLETELY WIRED AND TESTED  
**134.50** 5.00 DOWN

### "Futurama" OF DESIGN FEATURES

- Precision "Null" Stereo Calibration & Balancing
- Controlled Cross-Channel Signal Mixing
- Third Channel Controlled Output
- 24 Separate Equalization on Each Channel
- Monaural Recording or Play With Stereo Sources
- 6 Concentric Front-Panel Controls
- 4 Concentric Rear-Panel Input Level Controls
- Switched Fletcher-Munson Loudness Contour Compensation
- Paralleled or Single Channel Amplifier Drive With Monaural Sources
- 180° Phase Reversal

### The KT-600 Solves every Stereo-Monaural problem.

- RESPONSE 5-40,000 cps
- AMAZING NEW BRIDGE CONTROL PROVIDES VARIABLE 3rd CHANNEL OUTPUT FOR 3-SPEAKER STEREO
- VARIABLE CROSS CHANNEL SIGNAL FEED ELIMINATES "HOLE-IN-THE-MIDDLE" EFFECTS
- HIGHLY PRECISE "NULL" BALANCING & CALIBRATING SYSTEM FURNISHES MORE ACCURATE STEREO BALANCE THAN METERS
- TAPE HEAD PLAYBACK EQUALIZATION FOR NEW 4-TRACK STEREO

The KT-600 represents one of the most brilliant audio achievements since the advent of stereo. This "no compromise" stereo preamplifier and control unit offers unlimited versatility... includes every feature necessary for the very finest reproduction. Already in use professionally, the LA 600 has been overwhelmingly acclaimed by those who own it as the finest stereo preamplifier available—at any price! It has a total of 12 input packs (6 stereo pairs) for program sources of any type and any level—all of which may be selected by a front panel control. Separate Turnover and Roll-Off switches provide 24 positions of correct equalization— independently adjustable on each channel. A dual concentric Stereo Function selector provides extreme flexibility in the control of your selected program sources—there is practically no mode of operation which cannot be provided by these two switches. A unique Bridge Control provides continuously variable channel separation from full monaural to full stereo, or

it can optionally be used to regulate the 3rd channel output. A clutch-operated Volume Balance control provides independent or simultaneous level adjustment of channels. Additionally, this control may be used to balance channels by means of an audible "null"—far more accurate than meters! Low impedance plate follower outputs are provided for connection to two basic amplifiers (or stereo amplifiers) and in addition to the 3rd channel output, there are two tape output jacks for recording purposes. Other features include: 4 dual concentric input level controls; Presence Rise switch; Individual Bass and Treble controls for each channel; Rumble Filter; Scratch Filter; Loudness switch; Tape Play-Monitor switch. Shpg. wt., 16 lbs.

KT-600AWX Stereo Preamplifier Kit 5.00 down Net 79.50  
LA-600AWX Stereo Preamplifier, wired and tested 5.00 down Net 134.50

### SPECIFICATIONS

FREQUENCY RESPONSE: 5-40,000 cps - 1 db. DISTORTION: Less than 0.05% 1M of 2 volts out; Less than 0.1% Harmonic, at 2 volts out. SENSITIVITY: Low level 2.2 mv for 1 volt out; high level 94 mv for 1 volt out. Tape Head inputs 1.8 mv for 1 volt out. HUM AND NOISE: High level inputs better than 20 db below 2.0 volts, low level inputs better than 62 db below 2.0 volts. INPUT IMPEDANCES: High level—250K ohms, Mag—96K ohms; Ceramic—96K ohms in series with 68 uuf. Tape Head—470K ohms. OUTPUT IMPEDANCES: Main Outputs—1500 ohms, Tape Outputs—2700 ohms; Bridged Output—1100 ohms. TONE CONTROL RANGE: Bass - 15 db at 30 cps, Treble - 15 db at 10 Kc. RUMBLE FILTER: 12 db octave slope, down 15 db at 30 cps. SCRATCH FILTER: 12 db octave slope down 15 db at 15 Kc. CROSSTALK: Greater than 55 db separation between channels. AUXILIARY AC OUTLETS: 4, 1 unswitched. TUBES: 7-7025, 2-Selenium Rectifiers. POWER REQUIREMENTS: 35 Watts, 105-125 volts AC, 50/60 cycles. SIZE: 14Wx44Hx11D, not including projections.

**MORE LETTERS out of THOUSANDS!**

**Comments from the CRITICS and TECHNICAL PRESS!**

"The KT-600 is simply wonderful."  
Felipe Reyes  
New York, New York

"I wish to commend the staff who designed this kit. I think it is one of the best planned, best organized kits I have ever seen."  
Robert Fitz  
Columbus, Ohio

"...one of the finest stereo preamps available... I congratulate you on the fine achievement."  
Bill Mitchell  
Santa Rosa, Calif.

"...was a real pleasure putting the KT-600 together. Your etched circuit board set-up is finest I have seen."  
L. F. Ricketts  
Glendale, Calif.

**AUDIO**

"This is a skillfully engineered unit incorporating almost every mono and stereo function of value that has yet appeared."  
May, 1959

**high fidelity**

"The Lafayette KT-600 is unquestionably one of the most flexible stereo control units available today. Its flexibility is complemented by overall performance comparable to manufactured units selling for far more than its modest price. For all practical purposes may be considered a distortionless device."  
Oct., 1959

**ELECTRONICS WORLD**

"It incorporates just about all the features one could hope to find on a single chassis."  
May, 1959

## BUILD-IT-YOURSELF PROFESSIONAL 100-WATT STEREO SYSTEM

**LAFAYETTE Criterion STEREO SYSTEM**

LAFAYETTE KIT SYSTEM PRICE **407.65**



COMPONENTS	
Lafayette KT-600A Stereo Preamplifier Kit	79.50
Lafayette KT-550 Dual 50-Watt Basic Stereo Amp Kit (with enclosure)	134.50
2 Lafayette SK-115A 15" 3-Way Speakers @ 79.50	159.00
Lafayette-Panasonic PK-448 Integrated Transcription Tone Arm and Moving Magnet Stereo Cartridge	32.50
Lafayette PK-240 Transcription Turntable	37.50
Lafayette PK-505 Turntable Base (Choice of finish)	9.95
Regular Catalog Price	\$452.95

LAFAYETTE KIT SYSTEM PRICE **407.65**

ONLY 10.00 DOWN You Save 45.30	
Complete stereo system as listed above, Shpg. wt., 150 lbs.	
HS-385WX	10.00 Down 407.65
Same as HS-385WX, but with the addition of 2 CK-10 Bass Reflex Enclosure Kits	
HS-386WX Shpg. wt., 298 lbs	10.00 Down 460.75
Same as HS-385WX, but includes Garrard Model A record changer with base (Specify finish) and choice of Pickering 380C or Shure M7D stereo cartridges instead of Lafayette PK-240, PK-448 and PK-505. Shpg. wt., 176 lbs.	
HS-387WX	10.00 Down Net 408.00
Same as HS-385WX, but with the addition of the Lafayette KT-500A AM-FM Stereo Tuner.	
HS-388WX Shpg. wt., 206 lbs	10.00 Down Net 474.70
Same as HS-385WX, but with 2 Wharfedale W-50 2-Way Speaker Systems (Specify Finish) instead of Lafayette SK-115 speakers. Shpg. wt., 280 lbs.	
HS-389WX	10.00 Down Net 450.95



# SETS the STANDARD of HI-FI PERFORMANCE!

## "LABORATORY STANDARD" 100 WATT BASIC STEREO AMPLIFIER KIT the **KT-550**



COMPLETE with METAL ENCLOSURE



**TECHNICAL SPECIFICATIONS**  
Power Output: 50-watts per channel continuous RMS from 20-20,000 cps. 100-watts monophonic operation. Total Harmonic Distortion: Less than 15% at 1,000 cycles at 50 watts each channel, 0.75% from 20-20,000 cps at 50 watts each channel. Intermodulation Distortion: Less than 0.5% at 50-watts equivalent sine wave power, 60 & 7,000 cps, 4:1 ratio 0.15% at 10-watts equivalent sine wave. Frequency Response: 14-45,000 cps, 0 -1db at 50-watts; 2-100,000 cps, 0 -1db at 1 watt. Sensitivity: 1.0 volt RMS input for 50-watts output. Damping Factor: 15 at 1 kc—16 ohms. Feedback: Over 50db in six multiple loops. Hum and Noise: Better than 90db below 50-watts. Output Impedance: 4, 8 and 16 ohms. Convenience Outlet: Single A.C. convenience outlet. Fuse: Externally accessible fuse. Controls: 4 Bias Controls, 2 AC Balance Controls, Meter Selector Switch and Power On Off Switch. Tube Complement: Total of 70: 4 7027A, 4 6CL6, 2 6BR8A plus 5 Silicon Diodes. Power Consumption: 350-watts.

Made in U.S.A.

**MODEL KT-550**  
**134.50**  
IN EASY TO BUILD KIT FORM  
5.00 DOWN  
**COMPLETELY WIRED AND TESTED**  
**MODEL LA-550**  
**184.50**

### REMARKABLE LAFAYETTE KIT ENGINEERING

**Specially Designed Output Transformers**—fully potted, massively constructed with grain oriented silicon steel cores in 11 winding sections.

**Newly Developed 7027A Output Tubes**—rated at 70-watts, these tubes perform conservatively at 50 watts in the KT-550. Low operating temperature with extremely high efficiency for long tube life.

**Revolutionary Multiple Feedback Loop Circuitry**—over 50db of feedback virtually eliminates distortion without sacrificing stability.

**Metered Calibration Control Panel**—complete range of basic amplifier controls for balance and bias adjustments.

**Finest Components**—Telephone grade electrolytics with costly Corning, deposited metal-film glass-core resistors.

**Highest Quality Printed Circuit Boards**—Most of wiring is done for you—errors are virtually non-existent and top performance is assured.

**Famous Lafayette Instruction Manuals**—detailed step-by-step instructions. Large pictorials show where every wire and component goes—technical skill or experience is not required to assemble the KT-550.


- Conservatively Rated at 50-watts Per Channel—100 Watts for Monophonic Use.
- Frequency Response from 2-100,000 cps, 0 -1 db at 1-watt
- Distortion Levels So Low They Are Unmeasurable at Normal Listening Levels
- Hum and Noise Better Than 90 db Below 50-Watts
- Multiple Feedback Loop Design (over 50 db) Lowers Distortion Without Sacrificing Stability
- Metered Calibration Control Panel with D.C. Bias and AC Balance Potentiometers
- Massive Grain Oriented Silicon Steel Transformers
- New High Power Sensitivity 7027A Output Tubes
- Silicon Diode Power Supply
- Absolutely Stable Under Any Conditions of Load
- Effortlessly Drives Today's Low Efficiency Speakers

**BRILLIANTLY CONCEIVED**—The KT-550 represents high fidelity engineering and design in its furthest state of advancement. Specially developed engineering techniques with new concepts in audio design achieve an output of 50-watts per channel for stereo, or 100-watts combined output monaurally. The conventional approach in amplifier design for lowering distortion has been the use of "single loop" feedback. The KT-550 utilizes a "multiple loop" design to increase the degree of feedback and thus achieve phenomenally low distortion and high stability. The ratio of these "multiple loops" are adjusted to the relative degree of distortion produced. If one stage has twice the distortion of another, twice as much feedback is applied, resulting in a 20/1 to 30/1 reduction in distortion. Every component part has been chosen to complement its overall excellence. Special output transformers entirely utilize the broad band circuitry—fully potted, massively constructed with grain oriented silicon steel cores in 11 winding sections. The frequency response extends two octaves above and below the normal range of human hearing—0 -1db from 2 to 100,000 cps without evidence of ringing or instability. Other features include telephone grade electrolytics, highest-quality capacitors plus costly Corning deposited metal film glass-core resistors. The 7027A high power-sensitivity output tubes deliver up to 70 watts, yet in the 550 to insure long life at lowest distortion levels, they are required to perform at only 50 watts. Well regulated power supply is provided by four Silicon Diode Rectifiers, a low copper loss power transformer,

choke and heavy duty electrolytics. A metered calibration control panel consisting of four potentiometers, a function switch and precision meter furnishes bias and AC balance adjustments. The plate current of each 7027A output tube may be adjusted for proper balance and lowest distortion. A 60-cycle test signal is provided for AC balance adjustments. **THE PROOF IS IN THE LISTENING**—Musically, this is a superb instrument, one that will recreate the whole range of musical values. Bass response is tight and solid with the overall response unbelievably realistic. The KT-550 is able to effortlessly drive today's low efficiency speakers at any power level. In addition absolute stability is maintained under open circuit, pure capacitance or any other condition of load. Engineered for the kit builder, the KT-550 incorporates two printed circuit boards—virtually eliminates any possibility of error. Lafayette's famous step-by-step instruction manuals plus large pictorials provide ease of assembly—assures performance equal to the original, custom-built laboratory model. Handsomely finished in contrasting brown and beige with control panel finished in brass. Complete with beige finish steel cover, with built-in handles. 9 1/2"x12 1/2"x10-125V 50/60 cycle operation. Shpg. wt., 60 lbs.  
KT-550WX 5.00 Down Net 134.50  
Dual 50-watt stereo amplifier as above, wired and tested.  
LA-550WX 5.00 Down Net 184.50

### COMPARE PERFORMANCE

These performance curves demonstrate the ability of the KT-550 to provide high power output with extremely flat response at both ends of the frequency spectrum—Furnishes phenomenal reproduction even at low listening levels and is perfect for today's low-efficiency speakers.

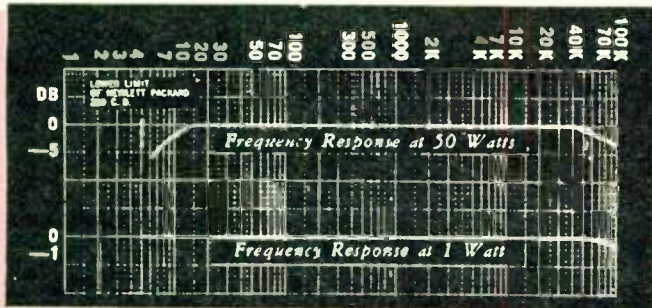

### ASSURANCE OF COMPONENT QUALITY

**ONE YEAR PARTS GUARANTEE**  
All components in this unit are conservatively engineered to operate well within their performance capabilities. As assurance of this quality, Lafayette guarantees all parts including tubes for one year.

## LAFAYETTE CRITERION QUALITY

## AT SENSATIONAL SYSTEM PRICES

LAFAYETTE KT-550

LAFAYETTE KT-600A

REK-O-KUT N33H

REK-O-KUT BW-1 TURNTABLE BASE

UNIVERSITY 312 12" SPEAKER

AUDIO EMPIRE 98 TONE ARM

**LAFAYETTE SYSTEM PRICE**

# 438.40

ONLY 10.00 DOWN You Save 83.50

OPTIONAL

KT-650 FM TUNER

ALTERNATES

LAFAYETTE ELIPTOFLEX BOOKSHELF ENCLOSURES

CHOICE OF

PICKERING 380C or AUDIO EMPIRE S108

AR-3 SPEAKER SYSTEMS

AR-3 SPEAKER SYSTEMS

**COMPONENTS**

Lafayette KT-600A Stereo Preamplifier Kit	79.50
Lafayette KT-550 Dual 50-Watt Basic Stereo Amp Kit (with enclosure)	134.50
Rek-O-Kut N33H Turntable with Hysteresis Motor	69.95
Rek-O-Kut BW-1 Turntable Base (Walnut)	19.95
Audio Empire 98 (Satin Chrome) Stereo Tone Arm	37.50
Audio Empire S108 Stereo Cartridge	34.50
2-University 312 Speakers @ 73.00	146.00
<i>Regular Catalog Price</i>	<b>524.90</b>

**LAFAYETTE KIT SYSTEM PRICE 438.40**  
ONLY 10.00 DOWN You Save 83.50

Complete stereo system as listed above with your choice of the Audio Empire S108 or Pickering 380A Stereo Cartridge Shpg. wt., 119 lbs.

HS-390WX 10.00 Down	Net 438.40
Same as HS-390WX, but with the addition of 2 famous Lafayette Eliptoflex bookshelf enclosures Shpg. wt., 167 lbs.	
HS-391WX 10.00 Down	Net 504.40
Same as HS-390WX, but with Garrard Model A record changer plus base and choice of Pickering 380C or Shure M7D Stereo cartridges instead of Rek-O-Kut N33H, BW-1 Base, Audio Empire 98 and S108. Shpg. wt., 114 lbs.	
HS-392WX 40.00 Down	Net 379.95
Same as HS-390WX, but with the addition of the Lafayette KT-650 FM Tuner Kit.	
HS-393WX Shpg. wt., 133 lbs. 10.00 Down	Net 492.90
Same as HS-390WX, but with 2 AR-3 Speaker systems (Specify finish) instead of University 312.	
HS-394WX Shpg. wt., 136 lbs. 10.00 Down	Net 710.90

NEW EASY-PAY PLAN—NO MONEY DOWN. SEE PAGE 54 FOR FULL DETAILS

# NEW! LAFAYETTE LA-225 ...

An Outstanding Value!!

## 40-WATT FM-AM STEREO RECEIVER



Model LA-225  
**174.95**  
 5.00 DOWN

A Matched FM-AM Stereo Tuner PLUS A 40-Watt Stereo Amplifier (20-Watts each Channel) at Lafayette's Amazing Low Price!

- Complete Stereo Preamp Facilities
- Individual FM and AM Tuner Sections
- 16 Controls on Front Panel
- 30 Tube Performance—21 Tubes (9 Dual-Purpose) + 1 Germanium Diode
- JUST ADD A TURNTABLE AND SPEAKERS FOR TRUE STEREO

**Amazingly Priced!!**

**SPECIFICATIONS**

**TUNER:** Harmonic Distortion: 7 on FM for 100% modulation; FM Frequency Response: 20-20,000 cps ± 1db; FM Sensitivity: 1.5 μv for 20db quieting; Hum Level: -60db; Image Rejection: FM—50db.  
**AMPLIFIER:** Hum Level: -65db below full output for low level, -75db for high level; Power Output: 20W per channel, 7% H.D. Sensitivity: mag. phono 2.0 mv at full output, aux .32 at full output, crystal input 55 mv at full output; Tone Control: ± 12db @ 50 cps (bass), ± 12db @ 10,000 cps (treble); Frequency Response: ± 1db 20-30,000 cps; Loudness Control: 10db @ 50 cps; Output Impedance: 8 & 16 ohms switch selected; Input Impedance: 47K phono, .22 meg (high level); Rumble Filter: -14db @ 30 cps; Scratch Filter: -9db @ 10,000 cps; Channel Separation: better than 50db @ 1000 cps.

The Lafayette LA-225 has been designed for the control and reproduction of all stereo and monophonic sources and features input and control facilities for every stereo function including an output for FM multiplex. The receiver section consists of individual FM and AM tuners each with their own precision tuning meters and flywheel tuning controls for precise station selection. A sensitivity of 1.5 μv for 20 db of quieting is achieved by the FM section with AFC and AFC defeat assuring reception of even the weakest signals. The AM section features superhet circuitry with 3 stages of AVC, ferrite loop antenna and broad or sharp bandwidth for high fidelity performance or maximum noise rejection. The 40-watt amplifier section furnishes a frequency response of 20-30,000 cps ± 1 db at normal listening levels. Complete stereo preamp facilities provide front panel controls for Bass, Treble, Balance, Volume clutch control, 4-position Selector Switch (FM MPX, FM-AM, Phono, Aux), 4-position Mode Switch (Left FM, Right AM, Stereo, Rev.), blend control for variable channel separation for full stereo to full monaural—a total of 16 controls (10 plus 3 dual). Roar panel features: phasing switch, hum adjust; headset jack selected by switch; selection of impedance by switch; fuse retainer; AC outlet for phono, etc. power.

Complete with a handsome enclosure in a contrasting brown and brass decor. Overall size: 17 1/2" W, 15" D, 5 1/4" H. Shpg. wt., 45 lbs. LA 225 WX 5.00 Down Net 174.95

**NEW!**

## LAFAYETTE LA-225 FM-AM STEREO PHONO SYSTEM

A COMPACT PACKAGE with OUTSTANDING QUALITY at an unprecedented LOW PRICE!



LAFAYETTE LA-225



SK-180 TRIHELIX SPEAKERS

**SAVE 43.30**  
**299.95**  
 Only 10.00 Down

**COMPONENTS**

LAFAYETTE LA-225, 40-WATT COMPACT STEREO FM-AM TUNER/AMPLIFIER	174.95
GARRARD MODEL "A" 4-SPEED RECORD CHANGER	69.50
LAFAYETTE WOOD BASE FOR GARRARD CHANGER	3.95
PICKERING 380C DIAMOND NEEDLE STEREO CARTRIDGE	29.85
2 LAFAYETTE SK-180 TRIHELIX SPEAKERS @ 32.50 EACH	65.00
	<b>343.25</b>

Regular Catalog Price



GARRARD MODEL "A" CHANGER

**NOW! NO MONEY DOWN**

Choice of PICKERING 380C or SHURE M7D



"Eliofoflex" Enclosures

OPTIONAL

Lafayette SK-58 Speakers

Only 10.00 Down **SAVE 43.30** LAFAYETTE SYSTEM PRICE **299.95**


This value-packed system consists of true-matched components at a savings of \$43.30. Featured is the LA-225, Lafayette's 40-watt FM/AM Stereo Tuner/Receiver, with a peak power of 80 watts. The LA-225 also features facilities for all stereo and monophonic sources. Included is the Garrard Model "A" 4-speed automatic record changer supplied with your choice of stereo cartridges — the Pickering 380C (.7 Mil) diamond stereo cartridge or the Shure M7D (.7 Mil) diamond stereo cartridge. The Lafayette wood base, for the Garrard Model "A", is available in mahogany, walnut or blonde. The two Lafayette SK-180 Trihelix speakers deliver a quality of performance with the unmistak-

able feel of a superb 3-way speaker system. The entire system is supplied complete with plugs, cables, and easy-to-follow instructions. Shpg. wt., 86 lbs. COMPACT HI-FI STEREO SYSTEM with choice of Pickering 380C or Shure M7D cartridge and mahogany, walnut or blonde changer base (specify finish). MS-410WX 10.00 Down Net 299.95 Same as MS-410WX but with addition of 2 outstanding "Eliofoflex" Bookshelf Enclosures (specify finish). MS-411X Shpg. wt., 162 lbs. 10.00 Down Net 362.95 Same as MS-410WX but with famous Lafayette SK-58 free-edge 12" 2-way speakers. MS-412WX Shpg. wt., 86 lbs. 10.00 Down Net 295.95

## "DO-IT-YOURSELF" and SAVE with LAFAYETTE HI-FI STEREO KIT SYSTEMS



LAFAYETTE KT-236A

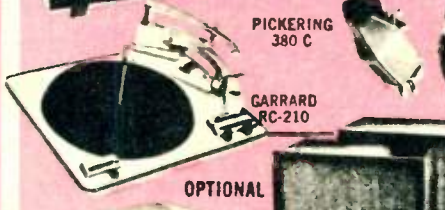

PICKERING 380C



KT-650 FM TUNER



"ELIOTFLEX" ENCLOSURES



SK-58 SPEAKERS



SK-128 SPEAKERS



"MINI-DUCT" ENCLOSURES

**COMPONENTS**

Lafayette KT-236A 36-Watt Stereo Amplifier Kit	59.50
Garrard RC210 4-Speed Record Changer (Less Base)	44.50
Pickering 380C Diamond Needle Stereo Cartridge	29.85
2-Lafayette SK-128W 8" Ultra-Linear Duaxial Speakers @ 19.50	39.00
	<b>172.85</b>

**BUILD THIS 36-WATT STEREO SYSTEM KIT**

**ONLY 139.50**  
 YOU SAVE 33.35  
 5.00 Down

**COMPONENTS**

Lafayette KT-250A 50-watt Stereo Amplifier Kit	74.50
Garrard RC210 4-Speed Record Changer	44.50
Pickering 380C Diamond Needle Stereo Cartridge	29.85
2-Lafayette SK-58 12" Coaxial Speakers @ 29.50	59.00
	<b>\$207.85</b>

**DELUXE 50-WATT DO-IT-YOURSELF STEREO KIT SYSTEM**


**ONLY 169.50**  
 YOU SAVE 38.35  
 5.00 Down



LAFAYETTE KT-250A



SK-58 SPEAKERS




PICKERING 380C



KT-500



RC-210



"ELIOTFLEX" ENCLOSURES

Complete stereo system as listed above Shpg. wt., 50 lbs. (Specify Pickering 380C or Shure M7D Cartridge) MS-280WX 5.00 Down Net 139.50 Same as HS-280WX plus 2 Lafayette CAB-47WX Mini-Duct Bookshelf Enclosures (Specify Finish). Shpg. wt., 93 lbs. MS-281WX 5.00 Down Net 182.50 Same as HS-280WX, but with 2 Lafayette SK-58 12" Coaxial speakers instead of 2 SK-128 speakers. Shpg. wt., 61 lbs. MS-282WX 5.00 Down Net 159.50

Same as HS-282WX, but with 2 Lafayette CK-14WX Eliofoflex Bookshelf Enclosures in Kit form. Shpg. wt., 109 lbs. MS-283WX 5.00 Down Net 199.95 Same as HS-280WX, with the addition of the Lafayette KT-650 FM Tuner Kit. Shpg. wt., 64 lbs. MS-284WX 5.00 Down Net 189.00 PK-394W Wood base for RC210 Net 4.95

Complete systems as listed above. (Specify Pickering 380C or Shure M7D Cartridge). Shpg. wt., 80 lbs. MS-180WX 5.00 Down Net 169.50 Same as HS-180WX plus two famous Lafayette CK-14WX Eliofoflex Bookshelf Enclosures in kit form. Shpg. wt., 128 lbs. MS-181WX 10.00 Down Net 210.50 Same as MS-180WX, but with two of Lafayette's advanced design SK-180 Trihelix 10" 3-way speakers in-

stead of SK-58's. Shpg. wt., 122 lbs. MS-182WX 5.00 Down Net 173.50 Same as HS-182WX, plus two famous Lafayette CK-14WX Eliofoflex Bookshelf Enclosures in Kit form. Shpg. wt., 170 lbs. MS-183WX 10.00 Down Net 214.50 Same as HS-180WX, with the addition of the Lafayette KT-500A AM/FM Stereo Tuner Kit. Shpg. wt., 100 lbs. MS-184WX 10.00 Down Net 239.50

# EICO

# Paco

# REK-O-KUT

# H.H. SCOTT

# FAIRCHILD

# Electro-Voice

# Acrosound

# H.H. SCOTT



### NEW! EICO RP-100 TAPE DECK KIT

A new, precision engineered, stereo/monaural tape deck, the RP-100 provides stereo/mono 1/4 track erase, record, and playback; plus 1/2 track playback. Separate record and playback heads and preamps permit simultaneous stereo playback from tape while recording. Sound-on-Sound recordings can be obtained without changing any connections. Features: Dual meters for monitoring stereo record levels and separate line and mic. (dynamic) mixing controls for each channel; SPECIFICATIONS: Tape speed—7 1/2 or 3 3/4 ips; up to 7" reel size; Flutter and Wow—0.2% at 7 1/2 ips, 0.25% at 3 3/4 ips; Frequency response: 30-17,000 cps at 7 1/2 ips, 40-15,000 cps at 3 3/4 ips; Signal-to-Noise ratio—53 db, or better; Timing accuracy—0.3%; Dimensions: 15 1/2" wide, 13 1/2" front-to-back, 7" deep. Shpg. wt., 28 lbs. RP-100K semikit; includes transport completely assembled and tested with 3 heads, stereo record, and stereo playback preamps in kit form.

Net 289.95  
RK-275WX  
RP-100W wired and tested with 3 heads, stereo record, playback preamplifiers.  
Net 395.00  
RK-276WX

### EICO ST-96K FM-AM STEREO TUNER



Features pre-wired, pre-aligned FM front end, FM and AM IF strips. SPECIFICATIONS: SENSITIVITY: (FM) 1.5 uv for 20 db quieting; (AM) 3uv for 1.0V average output at 20 db S/N ratio. SELECTIVITY: (FM) 250 Kc JF bandwidth (6db down); (AM) overall IF bandwidth of 18Kc at "broad bandwidth" 9Kc at "narrow bandwidth" FREQUENCY RESPONSE: (FM) 20-15,000 cps ± 1db; (AM) 20-9,000 cps on "wide bandwidth," 20-4,500 cps on "narrow bandwidth" IMAGE REJECTION: (FM) 40db; (AM) 60db; HUM LEVEL: 60db down; DRIFT: (FM) less than 2 parts in 10,000 from cold start; (AM) negligible OUTPUT LEVEL: (FM) 2.5v for 100% mod. (AM) 1.0v average POWER REQUIREMENTS: 117 volts AC, 60 cps. 15 1/2"x5 1/4" Shpg. wt., 19 lbs.

G-517WX Net 89.95  
Model ST-96 Same as above, but factory wired.  
G-516WX Net 129.95

### NEW EICO ST-70 70 WATT STEREO INTEGRATED



Consists of 2-35 watt amplifiers and a complete stereophonic hi-fi control center on one chassis. Stereo inputs in switched sets including: 2 magnetic phono (one for turntable, one for changer), tape head, pre-amplified, tape, FM-AM stereo tuner, FM-FM Multiplex, and Auxiliary. Controls: Level with balance check switch and loudness/level switch; bass, treble, six-position mode selector, blend, tape speed, tape monitor, scratch, and rumble. Output: 4, 8, and 16 ohm speaker. Third channel output available. Specifications: IM distortion—2% at 70-watts. Harmonic Distortion—1/2% at 70 watts. Frequency response—± 1/2 db, 20-20,000 cps. Shpg. wt., 35 lbs.

G-518WX Net 94.95  
As above, but factory wired.  
G-519WX Net 144.95

### NEW EICO ST-40 40-WATT STEREO INTEGRATED AMPLIFIER KIT



The ST-40 contains 2 twenty watt amplifiers and a complete stereophonic hi-fi control center on one chassis. FEATURES: Switched sets of stereo inputs including magnetic phono (2), tape head, pre-amplified, tape, FM-AM stereo tuner, FM-FM Multiplex, and Auxiliary. Balance Check switch. Loudness/level switch. Bass and treble controls. Other controls include: Six position mode selector, tape monitor, scratch and rumble. Output 4, 8, and 16 ohm. Third channel speaker connection. Specifications: IM distortion—2% at 40 watts; Harmonic Distortion—1/2% at 40 watts; Frequency response—± 1/2 db, 20-20,000 cps. Shpg. wt., 27 lbs.

G-520WX Net 79.95  
Same as above, but wired.  
G-521WX Net 124.95

# EICO

### MODEL AF-4K COMPLETE STEREO PHONIC DUAL AMPLIFIER KIT



Model AF-4K utilizes a 27 db feedback level to help lower harmonic and intermodulation distortion. Independent, concentric level and tone controls. SPECIFICATIONS: FREQUENCY RESPONSE: ± 0.5 db 30-20,000 cps. HARMONIC DISTORTION: less than 1% at 4 watts. SENSITIVITY (for 4W output/channel): .26v (phono) .113V (other inputs). HUM: 74 db below full output. SPEAKER CONNECTIONS: 4, 8, 16, 32 ohms. TUBE COMPLEMENT: 2-12DW7, 2-EL84, 1-EZ81. 3 3/4"x12 3/4" Shpg. wt., 13 lbs.

G-498 Net 38.95  
AF-4 Same as above, but factory wired.  
G-499 Net 64.95



### EICO FM TUNER HFT-90

Newly-designed, extremely sensitive, low-noise "front end" supplied in a cast housing completely pre-wired, pre-aligned, ready to use. Employs the broad-band detector circuitry used in \$169 FM tuners now on the market. Also features new DM-70 traveling tuning eye. Input 300 ohms. IF bandwidth 260 kc, detector separation of 600 kc. Freq. resp. 20-20,000 cps—1 db. Audio output 1 V for 10 uv input with 75 kc deviation. Hum 60 db below 1 V. Cathode follower and multiplex outputs. Flywheel slide-rule tuning, AGC, stabilized low limiting threshold for excellent performance from weaker signals, broad-band ratio detector for improved capture ratio and easier tuning, full-wave rectifier and heavy filtering, very low distortion. Uses 1-ECC85 6A08, 3-6AU6, 1-6AL5, 1-6CA, 1-DM70, 1-6X4 Flexible "low silhouette" design adaptable to any panel thickness for console installation, optional cabinet. HWD: 3 3/4" x 12" x 8 1/4". Operates from 110-125 VAC, 60 cps line. Shpg. wt., 10 lbs.

HFT 90K FM TUNER KIT (less cover) Net 39.95  
G-422 Net 39.95  
HFT 90 Factory wired and tested tuner. Net 65.95  
G-423 Net 65.95  
E-5 Cover for above Net 3.95  
G-431 Net 3.95

### EICO STEREO PHONIC DUAL PREAMP KIT HF-85K



Self-powered preamp-control center offering complete switching and control facilities for any stereo program source. SPECIFICATIONS (both channels): Frequency response 5-200,000 cps ± 0.3 db; IM distortion (60 & 7000 cps) 0.3% @ 1 v. RMS output; Harmonic distortion (20,200 cps) .1% @ 3 v. RMS output; Tone-control range ± 15 db @ 50 and 10,000 cps; RIAA phono and NARTB tape head (15, 7.5, and 3.75 ips) equalization; Output-to-main amplifier impedance, 8000 ohms. Tubes: 5-12AX7/ECC83's, 1-6X4. Size: 3 3/4" high, 12" wide, 8 1/4" deep. Shpg. wt., 10 lbs. Cover supplied. HF85K Stereo Dual Preamp Kit.

G-492 Net 39.95  
HF85 Same, Factory wired and tested  
G-493 Net 64.95


### 12-WATT WILLIAMSON-TYPE HI-FI AMPLIFIER... PREAMP... HF-12K



Compact, attractively styled amplifier with complete front end facilities and true high fidelity performance. Direct tape head and magnetic phono inputs with NARTB (tape) and RIAA (phono) feedback equalizations. Dual triode circuit for variable turnover bass and treble feedback-type controls. Power output: 12 watts continuous, 25 watts peak. Intermodulation distortion 1.5% at 12 watts, 0.55% at 6 watts, 60 to 6000 cps. Frequency response: 12-50,000 cps ± 0.5 db at 1 watt; 25-20,000 cps ± 0.5 db at 12 watts. 4 Controls: Selector switch, level control, bass and treble controls. Speaker connections for 16, 8, and 4 ohms. Tubes: (2) ECC83/12AX7, ECC82/12AU7, (2) EL84, EZ81. Size: 3 3/4" H, 12" W, 8 1/4" D. Shpg. wt. 13 lbs. With instructions.

HF 12K—Complete Kit. Net 34.95  
G-424 Net 34.95  
HF 12—As above, factory wired. Net 57.95  
G-425 Net 57.95


### NEW ACROSOUND STEREO 120 WATT AMPLIFIER KIT



60 watts of distortionless power in each stereo channel; 120 watts for monophonic use. Variable damping assures optimum speaker match. Frequency response: flat within 0.5 db from 5 cps to 80 kc. IM distortion: less than 1% at 60 watts, less than 0.5% at 50 watts for each channel. Sensitivity: 1.5v RMS for full 60 watts output. Size: 10 1/2"x14 7/8" H. Shpg. wt., 47 lbs.

G-580WX Kit Net 159.50  
G-581WX As above, but wired Net 219.50

### ACROSOUND S1001 STEREO PREAMP KIT



Easy printed circuit board construction. Unique features include Mike Dub Switch, balance control, and panel Light Matrix. SPECIFICATIONS—INPUTS: 2-MAG Cart, 2-Tape Head, 2-Tuner (FM-AM, FM-FM Multiplex), Tape Input, Microphone. OUTPUTS: 2-Main, 2-Tape, 3rd Channel. CONTROLS AND SWITCHES: Tape Monitor, Mike Dub, Input Selector (78, LP, RIAA-1, RIAA-2, Tape Head, FM-AM, FM-FM Multiplex, Aux.), 2-Bass, 2-Treble, Balance, Ganged Volume/Loudness, Output Selector (Check A, Check B, Stereo, Stereo Rev., Mon, AB, Mon, A, Mon, B), 1-Scratch, 1-Rumble, Phasing, Loudness In-Out. 4 A.C. outlets (2-switched). 4 3/4"x12 3/4"x6 1/2" D. Complete with enclosure and instructions. Shpg. wt., 10 lbs.

G-578WX Net 69.50  
Power Supply Kit for S1001. Shpg. wt., 5 lbs. Net 10.00  
G-579W Net 10.00



### DYNA TUNER FM KIT

The new Dynakit FM tuner utilizes complete printed circuit design. Can be completely aligned without the need for auxiliary equipment or instruments—using only the built-in tuning indicator. Designed for maximum linearity and stability of operation—yet has high sensitivity and excellent rejection of spurious signals. IM DISTORTION: less than 0.25% over useful range of operation. OUTPUT LEVEL: 1 1/2 volts. TUBE COMPLEMENT: 7 tubes plus rectifier, tuning eye and 2 diodes. POWER REQUIREMENTS: 110-120 AC, 60 cps. 13x4x8". Shpg. wt., 11 lbs.

G-467WX Net 79.95  
G-469WX Net 119.95  
Dyna Tuner Wired and Tested


### DYNAKIT PAS-2 STEREO PREAMPLIFIER KIT



The PAS-2 stereo preamplifier includes two independent preamplifier-control channels with complete stereo facilities. Inputs: 3 stereo low level and 4 stereo high level. Outputs: low impedance audio output and tape output. Frequency response: ± 0.5 db 6-60,000 cps. Distortion: less than 0.5%. Noise: less than 3 uv equivalent noise input on RIAA. Gain: 60 db at 1000 cps on RIAA, 20 db on high level. Tubes: 4 12AX7/ECC 83, 6X4, selenium rectifier. Size: 13x8x4". Shpg. wt., 11 lbs.

G-453WX Kit Net 59.95  
DynaKit PAS-2 Stereo Preamp. Same as above, but completely wired. Shpg. wt., 11 lbs. Net 99.95  
G-454WX Net 99.95

### DYNAKIT STEREO 70 70-WATT STEREO AMPLIFIER KIT



The stereo 70 has 2 independent power amplifiers capable of 35 watts for each channel or 70 watts of power for monophonic use. Frequency response ± 0.5 db 10-40,000 cps, IM distortion less than 1% at 35 watts. Sensitivity: 1.3 volts rms input for 35 watts output. Output impedance: 4, 8, 16 ohms. Minimum channel separation 55 db. Size: 13x9 1/2"x6 1/2". Shpg. wt., 32 lbs.

G-455WX Kit Net 99.95  
DynaKit Stereo 70 Stereo Amplifier. Same as above, but completely wired. Net 129.95  
G-456WX Net 129.95


### DYNAKIT PAM-1 HI-FI PRE-AMPLIFIER KIT



A quality preamp-control unit incorporating factory-wired printed-circuit module for easy assembly. Inputs: Low-level magnetic input, tape head, or mike. Outputs: Tape and audio output. Controls: Selector-equalization, bass, treble, volume, tape monitor, loudness, hum-balance. Phone Equalization: RIAA, 78 rpm. IM Distortion: Less than .05%. Response: ± 0.5 db 6-60,000 cps. Tubes: 2—ECC-12AX7 plus selenium stack. Power Requirements: 200-400 volts d.c. @ 3-4 ma.; 6 volts a.c. @ .75 amps. Size: 2 1/2" high x 12" wide x 6" deep. Shpg. wt., 7 lbs. Choice of bone white or charcoal brown vinyl finish.

G-465 Kit Net 34.95  
G-466 As above, but wired, Net 59.95

### DYNAKIT MARK III 60 WATT POWER AMPLIFIER KIT



Compact 60 watt basic amplifier. Accurate and simple bias setting independent of meter accuracy. Frequency response better than ± .5 db from below 6 cps to above 60 kc. IM distortion less than 1% at 60 watts, .5% below 50 watts and .04% at average listening levels; less than 1% harmonic distortion within 1 db of 60 watts from 30 cps to 20 kc. 4, 8, and 16 ohm outputs. Utilizes 1 6AN8, 2 K888 (or 6550), 1 GZ34 and selenium rectifier. All parts, tubes and protective cover included in kit. Shpg. wt., 28 lbs.

G-457WX Kit Net 79.95  
G-458W As above, but wired Net 99.95  
G-459WX Kit with 70.7 volt output for P.A. use Net 84.95

### PACO SA-40 40-WATT STEREO AMPLIFIER KIT



SA-40 combines a dual 20 watt amplifier and versatile preamplifier in one easy-to-build kit. PERFORMANCE SPECIFICATIONS—RESPONSE: 30-90,000 cps, ± 1 db. DISTORTION: Less 0.2% harmonic and 1% intermodulation per channel. INPUTS: 14 total. OUTPUTS: Dual tape, Separate Preamp, Dual Speaker. HUM AND NOISE LEVEL: Up to 80 db below rated output. SPEAKER TAPS: 4, 8, 16, 32 ohms. SENSITIVITY: Tuner and Aux. 0.75 v., Mag. Phono-1.5 mv., Mag. Phono-2.5 mv., or 0.3 v. Ceramic TAPE OUTPUT LEVEL: 2 v., unaffected by Loudness or Tone settings. 9 tubes plus 2 silicon and 1 selenium rectifier. For 117 v. 50-60 cycles AC. 15 1/2" W x 11 3/4" D x 5 1/4" H. Shpg. wt., 23 lbs. Complete with case and step-by-step assembly-operation manual.

G-590WX Net 79.95  
G-591WX SA-40, Factory Wired Net 129.95




### LT-10 FM TUNER KIT

Employs renowned Scott Wide-Band circuitry with pre-assembled, pre-aligned silver plated front end. Mechanical chassis assembly complete with tube sockets and terminal strips pre-riveted to chassis. Wires are pre-cut, stripped, tinned. A new alignment procedure utilizing the tuner's own meter assures proper alignment. Size: 13x4 1/2"x9 1/2". Shpg. wt., 12 lbs.

Net 89.95  
G-164WX Net 89.95  
Scott C Case for LT-10 Net 12.95  
G-147W Net 12.95

### H.H. SCOTT LK-72 72-WATT INTEGRATED STEREO AMPLIFIER KIT



Easy-to-build 72-watt stereo amplifier kit (36 watts each channel). The "Kit Pak" container unfolds to a self-contained work-table. Parts are mounted on special cards with all wires pre-cut and pre-stripped. Mechanical parts are pre-mounted. Features include: Center Channel Level Control; Scratch Filter; Tape Recorder Monitor; Separate Bass and Treble controls for each channel. Size in accessory case: 15 1/2"Wx5 1/2"Hx13 1/4"D. Shpg. wt., 35 lbs.

G-625WX Net 149.95  
Scott leatherette covered C cage for LK-72 Kit. Net 12.95  
G-147W Shpg. wt., 5 lbs. Net 12.95


### FAIRCHILD 440 2-SPEED TURNTABLE KIT



A new high fidelity turntable kit. 2-speed operation (33 1/3 and 45 rpm), single belt drive, Speed Sentinel control varies turntable speed ± 1/2%, highly styled and precision turntable platter. Entire assembly supplied on a channel for easy mounting. Rotational speed controlled from top. Strobe disc included to determine correct speed. Size: 19x16x10". Complete with unfinished mounting board, 19x16". For 110V, 60 cycle, AC. Requires 1 1/2" clearance above turntable, 3/4" below. GR-276W Shpg. wt., 21 lbs. Net 55.00

MODEL 440CBW. Base for above. Includes walnut mounting board, walnut wraparound. 19x16x8". Shpg. wt., 12 lbs. Net 19.95  
GR-275W Net 19.95

### NEW REK-O-KUT K-34H 2-SPEED TURNTABLE KIT



Has a high-efficiency, self-lubricating hysteresis-synchronous motor, the stereotable is driven by an endless belt with a variable adjustment for optimum tension. Table is machined of solid lathe turned cast aluminum. Noise level: 57 db below average recording levels. Wow and Flutter: 0.15%. Speeds: 33 1/3 and 45 RPM. Size of Chassis Deck: 12 1/2"x19". Finished with a white deck plate. For 110-120V, 60 Cycle AC operation. Shpg. wt., 17 lbs.

GR-260WX Net 59.95  
GR-262WX KB Walnut Base for K-34H, Shpg. wt., 8 lbs. Net 14.95

### These Famous Electro-Voice Compact Speaker Systems Now in Easy to Build Kits


The famous E-V Regal and Esquire Low Resonance Speaker Systems now available in completely engineered kits. All wood parts are pre-cut, with glue, screws and nails included. Complete with all speakers and components. Easy Step-by-Step instructions show you how to do-it-yourself.



### REGAL 300 KIT

Achieve the same premium-quality performance of the factory assembled Regal 300 bookshelf speaker system by building this new kit. Response 35-18,000 cps. Birch exterior surfaces allow professional-like furniture finishes. Size: 22x31 1/2"Wx11 3/4"D. Shpg. wt., 64 lbs.

GB-82WX Net 122.50




### ESQUIRE 200 KIT

The same fine extended bass response and performance of the factory assembled Esquire 200. Response 40-18,000 cps. Exterior surfaces of Birch provide a fine furniture finish. Size: 14x23 1/2"Wx12"D. Shpg. wt., 50 lbs.

GB-81WX Net 91.14

# LAFAYETTE AMERICA'S

For



Miniature and **STEREOPHONIC**

**NEW! LAFAYETTE TRANSISTORIZED PORTABLE TAPE RECORDER with BUILT-IN SPEAKER**



ONLY  
**2995**

Complete with TELEPHONE PICK UP EARPHONE, PATCH CORD, MICROPHONE, 3" REEL OF TAPE, EMPTY REEL, BATTERIES

- Camera Size—Only 6"Dx8¼"Wx2¾"H.
- Weighs a Mere 2½ lbs.
- Fully Transistorized
- Records and Plays Up To 20 Minutes with 1 Standard 3" Reel
- Built-in Speaker and Amplifier
- Record, Rewind, Playback and Erase
- Powered By 3 Inexpensive Batteries
- ½ Track Head Provides Maximum Tape Economy

This is a precision, full function miniature tape recorder perfect for home, office or travel; weighs only 2½ lbs. and slips easily into a briefcase or handbag. Utilizing sophisticated transistor circuitry with 3 transistors, the RK-125 contains its own 2" x 3" PM speaker and amplifier. Engineered for ease of operation, with all controls readily accessible from the front panel. A single function control provides for Rewind, Stop and Forward with a second control furnishing variable Volume. Play or Record functions are chosen by a simple slide switch. In addition microphone and earphone jacks are located on front panel. Designed for maximum tape economy the RK-125 employs a half track tape head—upper half is recorded first and tape is turned over to record on lower half . . . records and plays up to 20 minutes on a 300 ft ½ mil 3 inch reel of tape.

The attractive two-tone plastic and metal case features a carrying handle and snap open top for fast, easy tape loading. Power is supplied by 2 standard 1.5v flashlight cells and one 9v transistor battery. Complete with crystal label microphone, magnetic earphone batteries 100 ft 3" reel of tape and an empty reel. Measures only 6"D x 8¼"W x 2¾"H. Shpg. wt., 5 lbs.

RK-125	Net	29.95
RT-20 3" REEL 300 Ft. ½ MIL MYLAR TAPE Shpg. Wt., ¼ lb.	Net	.69
BA-2 9V TRANSISTOR BATTERY Shpg. wt., 2 oz.	Net	.49
BA-156 1.5V BATTERY (2 required) Shpg. wt., 2 oz.	Net	.13



## Award-Winning TAPE RECORDER

Never Before Such Quality and Value!

Lafayette **SCOOPS**  
THE TAPE RECORDER INDUSTRY

**49.50**

NO MONEY DOWN



- Up to 2-Hours at 3¾ ips on LP Tape
- Provision For External Speaker
- Permits Direct Recording From Radio or Phono
- 2-Speed: 3¾, 7½ ips

Perfect for home, school or office. At home, the RK-400 proves ideal for parties or recording your favorite musical performance. Handy fool-proof operation has been provided by a single rugged function control (reverse, stop, play and record) and separate on/off volume control. Speeds are adjustable from 3¾" to 7½" per second by a simple capstan adjustment. At 3¾ ips the RK-400 provides up to 2-hours recording on Long play ½ mil tape, up to one hour of recording time on a standard 600 ft. 5" reel of tape. Special 5" heavy duty permanent magnet speaker furnishes an exceptionally fine tonal quality. Record level indicator light facilitates recording by showing you when volume control is correctly set. Jacks are provided for microphone, phono and extension speaker (special alligator clip cord is supplied). These internal jacks permit making recordings directly from

your radio or phonograph regardless of their volume control setting. This feature eliminates distortion, hum and outside noise that may be present and give you professional recording results. Complete with sensitive crystal microphone. Finished in attractive scuff resistant pyroxylin material. Dimensions: 11¾x9¾x7½". For 110 volts 50-60 cycles. Shpg. wt., 20 lbs.

RK-400WX	Net	49.50
LAFAYETTE ACETATE BASE RECORDING TAPE. Features noise-free reproduction, low abrasion, uniform output. 1½-mil thickness: 5" reel: 600-ft. Shpg. wt., ½ lb.		
RT-17	lots of 1-4, Net ea.,	.99
	lots of 5-24, Net ea.,	.90
	lots of 25 up, Net ea.,	.85

# LAFAYETTE Transcorder

Transistorized Professional Pocket Tape Recorder

- FOR EXECUTIVES, SALESMEN, PROFESSIONALS, AND HOBBYISTS.
- RECORD-PLAYBACK ANYWHERE FOR ONLY PENNIES PER HOUR

Weighs only 3 pounds—size 8½x37x17½"—take it anywhere—in your briefcase or slung over your shoulder. As simple to operate as a camera—only 3 controls: ON-OFF—PLAY—RECORD—volume. Completely transistorized. Records and plays back for one full hour 1½ hour tape cartridges available. Tape speed 17½" per second. Slip in a cartridge of recording tape and you're ready to record. Records and plays back with amazing fidelity, and sensitive microphone picks up conversation as far as 30 feet away! Manual rewind is fast (less than 2 minutes), simple, economical—and foolproof. No backlash. No battery drain. No tape breakage. The hi-fidelity Mylar tape is erasable and can be used over and over again indefinitely.

Recordings can be monitored while they are being made. Visual battery life indicator. Recording time indicator tells you at a glance the recording time remaining. Play back through microphone. Accommodates a transistorized power amplifier and a 2-inch speaker which fit into the battery compartment. Available as accessory, this unique feature makes the TRANSCORDER completely self-contained. Two-tone baked enamel finish. TRANSCORDER—complete with combination microphone—playback speaker—one-hour tape recording cartridge and 12-hour battery. Shpg. wt., 4 lbs.

### ACCESSORIES

RK-430 Earphone Kit. Shpg. wt., 8 oz.	Net	11.25	Brief case with secret microphone for secret recording. Shpg. wt., 2 lbs.	Net	44.55
Transcribing control with foot pedal. Stops and starts TRANSCORDER during transcription. Shpg. wt., 3 lbs.	Net	35.50	RK-435		
RK-431	Net	10.25	Wrist Watch Microphone for secret recordings. Shpg. wt., 8 oz.	Net	40.00
Tape cartridge—one-hour recording time. Shpg. wt., 8 oz.	Net	12.15	RK-436		
RK-432	Net	8.95	POWER CONVERTER—Snaps into battery compartment for recorder operation on 110 volts AC house current. Complete with battery rejuvenator. Shpg. wt., 4 lbs.	Net	30.75
Tape cartridge 1½ hour recording time. Shpg. wt., 8 oz.	Net	12.15	RK-434		
RK-433	Net	4.45			
Replacement Battery (Burgess 2x7 or equiv.) Shpg. wt., 8 oz.	Net	1.82			
BA-315					

TRANSCORDER



FOOT PEDAL  
Weighs only 3 pounds!

**174.50**

AMPLIFIER-SPEAKER

TELEPHONE MIKE

Transistorized power amplifier/speaker. Fits inside battery compartment. Shpg. wt., 8 oz. Net 31.50  
 RK-426 Leather carrying case with adjustable shoulder strap, and pouch for microphone and earphone. Shpg. wt., 1 lb. Net 13.25  
 RK-427 Telephone mike—for recording two-way telephone conversations. Shpg. wt., 8 oz. Net 8.95  
 RK-428 Shoulder holster for carrying TRANSCORDER under jacket or coat. Shpg. wt., 8 oz. Net 4.45  
 RK-429

# VALUE CENTER...

## Tape Recorders!

### LAFAYETTE RK-103 DUAL SPEED TAPE RECORDER



#### CHECK THESE FEATURES

- ✓ PUSH-BUTTON CONTROLS
- ✓ DUAL SPEED—7½ & 3¾" PER SECOND
- ✓ TWIN SPEAKERS
- ✓ TAPE INDEX COUNTER
- ✓ SIGNAL TO NOISE RATIO BETTER THAN 40 db
- ✓ WOW AND FLUTTER LESS THAN 0.35%
- ✓ DUAL TRACK
- ✓ RESPONSE 50-13,000 cps
- ✓ POWERFUL 5 WATT AMPLIFIER

One of the finest tape recorder values Lafayette has ever offered. A perfect instrument for the entire family... fine for home, school or office. At home the RK-103 is ideal for parties or recording your favorite musical performances. Use it at school for lectures, notes or voice training. In the office the RK-103 is excellent for sales presentations or dictation.

Handy, fool proof operation has been accomplished by utilizing rugged push-button controls for play, record, rewind, forward and stop. Automatic interlocked switching makes it impossible to accidentally erase, spill or break tape. Dual speeds—7½ and 3¾ ips are incorporated along with dual track facilities, thus providing great versatility with tape economy. Tape-index counter allows precise pinpointing of any portion of tape. Record level indicator light facilitates recording by showing you when volume control is correctly set. Fast forward and rewind—1200" in 80 seconds. Accepts 7" reel size. Twin matched speakers (one on each side of recorder) coupled with an excellent 5-watt amplifier provide amazing tonal quality from 50 to 13,000 cps dispersing sound over a 360° area. Provision for connecting to external speaker and external amplifier. Input jack for recording from your Radio-Phono or TV. Attractively finished in black and white scuff-resistant pyroxylin material. Complete with microphone, 600 ft. of tape and extra reel. Dimensions are 14H x 14W x 10"D. Shpg. wt., 33½ lbs. For 115 volts 60 cycles AC. RK-103WX 5.00 Down Net 99.50

PAGE-SETTING  
QUALITY AT

**99.50**  
5.00 Down

### Unprecedented Lafayette Stereo Tapedeck Value!

### NEW! RK-115WX STEREO TAPE DECK

- Record & Playback 4-Track & 2-Track Stereo & Monaural
- Separate Playback and Record Preamplifiers
- 2-Speed—7½ IPS 7 3¾ IPS with Separate Equalization Circuits
- Frequency Response—30 to 16,000 cps.
- Separate VU Recording Level Indicators
- Individual Volume Controls For Each Channel
- Compact—Mounts Horizontally or Vertically
- Electromatic Remote Control
- Digital Type Tape Counter

**199.95**



5.00 Down

Here's the quality and performance you've been waiting for in a stereo tape deck and, at an unbeatable price. Completely self-contained the RK-115 combines a precision tape deck and stereo recording and playback preamplifier in one compact portable unit. A new advanced design, powerful salient pole induction drive motor with self-lubricating, double thrust, close tolerance bearings drives the flutter-free transport mechanism through a beltless drive. ¼ track stereo erase and record playback heads are laminate triple mu-metal shielded professional type, providing a frequency response of 30-16,000 cps = 2 db at 7½ ips or 40-12,500 cps = 3 db at 3¾ ips. Crosstalk rejection is better than 55 db. Wow & Flutter: less .18% at 7½ ips less than 25% at 3¾ ips. Switches and Controls: Transport Mech-

anism Selector Control provides forward stop-rewind; fast forward lever. Record safety switch to prevent accidental erasure. Speed selector for 7½ ips and 3¾ ips. Socket for electromatic remote control. Stereo Record Playback Amplifier Controls. Channel selector for stereo, monaural 1-4 and 2-3 channels. Equalization selector. Recording Playback selector for each channel. Ganged tone control with ON-OFF SWITCH for both channels. Volume control for each channel. Outputs: Cathode follower outputs for external stereo amplifier. Monitoring output jacks for hi-impedance or crystal earphones. Complete with attractive vinyl covered carrying case. Size 15½"W x 11 1/2" x 6"H. Shpg. wt., 66 lbs. For 60 cycles 110-117 volts AC. RK-115WX 5.00 Down Net 199.95



### SONY 262D TAPE DECK

- 4-Track Stereo Record/Playback & Erase Heads
- 7½ & 3¾ ips Tape Speeds
- 30-18,000 cps Response
- Full 7" Diam Reel Capacity

5.00 Down

**89.95**

High quality, precision engineering and construction at a truly economical price make this unit an unbeatable value. Provides for every tape facility—Tape heads are wired to six outputs. With your present stereo amplifier you can play back 4 track stereo tapes or by adding a recording amplifier, make your own 4 track tapes. A 4-track stereo erase-head is included. Features include instantaneous selection of 7½ or 3¾ ips tape speeds; instant stop lever; safety lock record button, automatic tape lifter and a digital counter. Freq. Response from 30-18,000 cps at 7½ ips, = 2db 50-15,000 @ 7½ ips and = 2db 50-12,000 @ 3¾ ips. For 110-117 V AC operation. Size: 13" W x 10" D x 5½" H. Shpg. wt., 15 lbs. RK-282WX 5.00 Down Net 89.95  
RK-284W Oil Walnut Base for Sony 262D 15.95



### MODEL CS-300 STEREO RECORDER

A complete 4 and 2 track stereophonic tape recording and playback system with built-in stereo preamplifiers and stereo playback monitors. Recording and playback also for 2 and 4 track monophonic tapes. Two speeds 7½ & 3¾ ips. Two built in VU meters insure accurate playback and record levels for professional sounding tapes. INPUTS: Stereo or monophonic 4 and 2 track recording, from 2 or more microphones, AM/FM stereo tuners, stereo record players and tape players. Separate level controls for microphone and auxiliary inputs provide mixing facilities for sound-over-sound recordings. Low impedance outputs to match external pre-amp or power amplifier inputs. An instant Stop Lever insures precise editing and cueing. Accidental erasure of important tape is prevented by a Safety Lock Recording Button. Bass compensation can be chosen from front panel. Specifications: Frequency response:—30-18,000 cps at 7½ ips; 30-13,000 cps at 3¾ ips. Signal to Noise Ratio 50 db or more per channel. Flutter and Wow—less than 0.15% at 7½ ips, less than 0.25% at 3¾ ips. Harmonic distortion less than 2% at 3 db below rated output. Tubes: 2-12AD7, 2-6AU6, 2-6AQ5, 1-12BH7, 1-6CA4. Size 17x14x8" high. For 117 volts 60 cps. AC. Includes carrying case with 2 built-in speakers and 2 F-7 dynamic microphones. RK-280WX 10.00 Down Net 399.50


Model DK-300 Same as CS-300 but without carrying case, speakers, and microphones. Shpg. wt., 35 lbs. RK-281WX 10.00 Down Net 349.50



### REVERE T2200 STEREO RECORDER

A new foolproof stereo tape recorder that performs as smoothly as it looks — one, simple 3-position control operates all electrical and mechanical functions. Two separate channels with built-in preamps permit you to play 2 or 4 track prerecorded stereo tapes or to record your own stereo from stereo records or tuners. Tape speeds, 3¾ and 7½ ips. Frequency response (both channels) 40-18,000 cps = 3 db at 7½ ips; 40-13,000 cps = 3 db at 3¾ ips. Signal-to-noise ratio greater than 48 db. Extra features include a special balanced tone control which emphasizes both treble and bass to give a realistic hi-fidelity tone especially at low volume settings. The recorder may also be used as an 8-watt public address system with reserve power for multiple speakers. Two-level Record Indicator shows correct sound level for distortionless recording. Digital index counter provides an accurate method of making selection for playback or editing. Automatic stop shuts machine off in either play or record when tape runs out. Smart ivory-chrome thinline case with telescoping handle for easy carrying. For 117 volts, 60 cps. AC. Size: 14x14x7½"D. Shpg. wt., 30 lbs. RK-475WX Net 209.95

RK-476WX Model T2200C Matching Speaker Amplifier Net 59.95



## TAPE RECORDERS At Prices You Can Afford

### Model T-1515-4 Four Track Stereo Hi-Fi Tape Recorder

- 10 Watts Push-Pull Output
- 40-15,000 CPS = 3 DB at 7.5 IPS
- Distortion Less Than 0.8%
- Simplified Keyboard Control
- Ingenious Portable Design—Weighs Only 18 lbs.

The Hi-Fi enthusiasts dream in a compact portable stereo tape recorder. Built-in stereo preamplifier for playback of 2 and 4 track monaural plus 2 and 4 track stereo. Records up to 4 separate monaural tracks on a single roll of tape. Dual speed (3.75 and 7.5 inches per second). Features exclusive high speed rewind lever, 2-level recording indicator and precision index counter. Accepts up to 7" reels. Supplied with ceramic wide-range microphone, 1 reel of tape, 1 empty take-up reel, radio-TV attachment cord and hi-Fi cable. 6½ x 10½ x 11¾". Shpg. wt., 24 lbs. For 110-120 volts, 60 cycles AC. Also available in 50 cycle units; please specify. RK-417WX 5.00 Down Net 172.50

### Model T-1500 Hi-Fi Tape Recorder

A truly reliable and superbly engineered tape recorder. Essentially the same as the Stereo T-1515 but designed for monaural use. Dual speed (3.75 and 7.5 ips), dual track—provides up to 4 hours of record or playback time. Size 6½ x 10¼ x 11¾". Shpg. wt., 24 lbs. RK-405WX 5.00 Down Net 149.50  
TSC-405—Carrying Case. Vinyl slip-over type. Fits all models. Shpg. wt., 2 lbs. RK-410W Net 6.75

Model T-1515-4 plus TSC 405 carrying case. SP-231WX Special Lafayette Combination 5.00 Down Net 172.50

Model T-1500 plus TSC 405 Carrying Case. SP230WX Special Lafayette Combination 5.00 Down Net 149.50

### NEW! Model T-1700 Mobile Tape Recorder

Now listen and record outdoors and indoors with true hi-fidelity. The T-1700 is a full size, portable tape recorder designed to operate from both a home AC outlet or a 12 volt car or boat battery by simply plugging into your cigarette lighter. Same fine performance and specifications of the T-1500. Complete with microphone, reels (one with tape), battery clip and connector, lighter plug plus 12 volt power cord. RK-423WX 5.00 Down Net 194.50

### 10-10 STEREO MATE FOR T-1515 & T-1616



**SALE  
PRICE  
37.50**

The 10-10 is a second channel amplifier for the T-1515 and T-1616 tape recorders. Self-contained hi-fi amp and speaker combination with 10-watt peak power output from a push-pull amplifier with 4-tube circuitry. Special 6x9" dual cone speaker utilizes built-in crossover network for distortion-free lows and sharp highs. Freq. response 30-10,000 cps, separate volume and tone controls. Use with any stereo tape recorder or phono, or in conjunction with a tuner. Size: 6½x12½x12". Shpg. wt., 9 lbs. RK-422W 2.00 Down Net 37.50

### SPECIAL COMBINATION OFFER

Model 1515-4 Stereo Tape Recorder plus 10-10 Stereo Mate plus TSC-405 Carrying Case SP-232WX 10.00 Net 204.50

**SPECIALY  
PRICED!  
T-1515-4**

**172.50**

5.00 DOWN

**FREE**

6.75 CARRYING CASE WITH THE PURCHASE OF T-1500 or T-1515-4 WOLLENSAK TAPE RECORDER





# LAFAYETTE TOP QUALITY RECORDING TAPE

## LAFAYETTE

### LAFAYETTE RECORDING TAPES

LAFAYETTE QUALITY IS BACKED BY OUR MONEY-BACK GUARANTEE



**LAFAYETTE'S FAMOUS MONEY-BACK GUARANTEE**  
Lafayette's tape is made by outstanding nationally known manufacturers. It is first quality, splice free, red oxide coated, with full frequency response, uniform output and no "drop-outs". Resistant to moisture, heat, cold and abrasion. We guarantee absolute satisfaction or your money back. If you do not find it equal to tapes costing up to twice the price, if for any reason you are dissatisfied, return the tape in 30 days and we will refund your money. You are the sole judge.

## LAFAYETTE BULK TAPE ERASER AND DEMAGNETIZER

### PROFESSIONAL MODEL

- Completely Erases Tapes
- Two Erasing Coils
- Erases up to 1" Tape
- Erases 1" Tapes in One Operation—No Reversing
- For 3", 5", 7" or 10 1/2" Reels

18.95



### STANDARD MODEL

- Takes Reels Up To 10 1/2"
- Reduces Noise Level
- Top Value

12.50



A carefully designed and precisely manufactured professional tape "degausser" for complete erasing of tapes. Just place the tape reel on spindle of demagnetizer, slowly rotate 2 or 3 turns, take off, and that's all. Reduce tape hiss to the level of new "virgin" tape. Two completely separate coils are used for doubly-effective erasures, even of large, 10 1/2" reels. Will erase 1" wide tape. An extra powerful unit for heavy-duty use—draws over 9 amperes. Can be used to demagnetize tape, magnetically stripped film, plus tools and watches. Has a heavy, custom finished case, a rugged non-magnetic top, heavy duty on-off switch and power cord. Has built-in fuse. Pilot light prevents accidentally leaving it turned on. Size 6 1/2"x7"x3 1/2". For 117 volts, 60 cps. Shpg. wt., 14 lbs. ML-120—Regularly 49.95 Net 18.95

A bulk tape demagnetizer that erases existing recorded signals and noise from magnetic tapes quickly and efficiently. Also capable of demagnetizing metal parts and work tools. Ideal for the recording enthusiast desiring clean, noise-free tapes. Simply rotate reel of tape several turns over unit, turn over and repeat once. Has two spindle positions: Inner position for tape reel sizes up to 7" in diameter, and the outer one for 10 1/2" reels. Push button energizes the coil, and a pilot light installed on top of the unit indicates unit in operation. Non-magnetic bakelite plate for tape reel rest. One powerful coil is used for effective erasure of all quarter-inch tapes. Current consumption—5 amps. Heavy duty rugged gauge metal case. Attractive finish. For 105-125 volts, 60 cycles. Size 7 1/2"x4 1/2"x3 1/2". Shpg. wt., 9 lbs. ML-176 Net 12.50

### LAFAYETTE MYLAR BASE RECORDING TAPE

AS LOW 1.42 RT-19 900 ft. 25 & up

Mylar base is especially strong, durable and break resistant, and is virtually impervious to heat, cold or humidity. All in clear plastic reels, individually boxed.

Stock No.	Feet	Reel	Mils	Wt. Lbs.	1-4	5-24	25 Up
RT-19	900	5"	1	3/4	1.75	1.58	1.42
RT-12	1800	7"	1	1 1/4	2.50	2.25	2.13
RT-13	2400	7"	1 1/2	1 3/4	3.69	3.39	3.22

Tensitized Mylar  
Prestretched, super-strong mylar base

Stock No.	Feet	Reel	Mils	Wt. Lbs.	1-4	5-24	25 Up
RT-16	2400	7"	3/4	1 1/2	4.95	4.45	4.23

3" REEL 300-ft. 1/2 mil mylar tape. Shpg. wt., 1/2 lb. RT-20 Net **.69**

YOU BE THE JUDGE!


### LAFAYETTE ACETATE BASE RECORDING TAPE

AS LOW 85¢ RT-17 600 ft. 25 & up

Acetate base magnetic recording tape with uniform standard red oxide coating provides wide range high fidelity response over the audio spectrum. Features noise free reproduction, low abrasion and uniform output. In 1 mil and 1 1/2 mil thickness.

Stock No.	Feet	Reel	Mils	Wt. Lbs.	1-4	5-24	25 Up
RT-17	600	5"	1 1/2	1/2	.99	.90	.85
RT-18	900	5"	1	3/4	1.35	1.20	1.08
RT-10	1200	7"	1 1/2	1	1.59	1.49	1.35
RT-11	1800	7"	1	1 1/4	1.98	1.88	1.79

### AUDIO TAPE COLOR-CODED SPLICING KIT

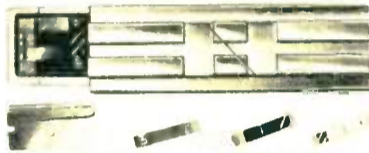

Everything you need for fast, professional tape editing and repairing. Easy-to-use gold anodized aluminum splicing block has special slide-out plastic storage compartment. Complete with blade and full assortment of color coded Quik Splice Mylar splicing and editing strips—will not shrink or become brittle with age. Shpg. wt., 8 oz. PK-500 Net 1.49

### TELEPHONE PICKUP FOR RECORDING TELEPHONE CONVERSATIONS



Induction telephone pickup. Telephone conversations can now be picked up with no tapping of wires or special telephone circuits. Simply place the phone base either cradle or upright type on the pickup platform and connect the leads to the high impedance input of any medium gain audio amplifier, or directly to any tape disc or wire recorder. Shpg. wt., 8 oz. MS-16 Net 1.95

1.95

### LAFAYETTE TAPE HEAD DEMAGNETIZER



- REMOVABLE POLEPIECES
- EXTRA CONVENIENT

Lafayette Tape Head Demagnetizer uses removable polepieces. Three complete sets are furnished: straight, 45°, and 90° (right angle), permitting quick and easy use with any tape head. A necessity for best tape recorder performance. Although unmagnetized when new, tape heads gradually become magnetized by sharp switching pulses occurring while switching the recorder from play to record or vice versa. The solution is to use a demagnetizer to remove this permanent magnetism from the head, thus reducing the noise level. Periodic head demagnetization is required for all tape recorders to insure optimum signal-to-noise ratio. Enables anyone to perform this necessary demagnetization with a minimum of effort and cost. For 110 volts 60 cycles. Shpg. wt., 1 lb. PK-238—Tape Head Demagnetizer 3.95

3.95

### MAGNETIC TAPE SPLICER



1.47

- Cut Both Ends Simultaneously
  - Easy to Operate
  - Durable & Sturdy
- An excellent accessory that splices tapes accurately and eliminates joint noise. Both ends cut simultaneously. Nickle-plated brass finish. Shpg. wt., 1 lb. MS-289 Net 1.47

### FILMAGIC TAPE MAINTENANCE KIT



The Kit contains all elements needed for cleaning and conditioning tapes and critical recorder parts. Consists of: Either Flange or Suction cup type Pylon with sleeve; Tape conditioner fluid; and head condenser fluid, used to clean capstans, rubber idler rollers. Shpg. wt., 3 1/2 oz. PK-482 Kit w/suction cup Pylon Net 3.45 PK-483 Kit w/flange-type Pylon Net 3.45

REPLACEMENT PARTS:  
PK-484 2 oz. Head Cleaner Net .98  
PK-485 2 oz. Tape Conditioner Net .98  
PK-486 Pkg. of 6 sleeves Net .75  
PK-487 Wick-Tip Applicator Net .39

### METAL STORAGE CANS



Your best protection for valuable recorded tapes and movie film. Cans are ribbed for easy storage. Precision fit makes opening and closing easy. Attractively finished in grey. 3 sizes to choose from to fit any size reel. Av. shpg. wt., 8 oz.

ML-154 3" Can	lots of 6, Ea.	.18	Singly, Ea.	.20
ML-155 5" Can	lots of 6, Ea.	.27	Singly, Ea.	.30
ML-61 7" Can	lots of 6, Ea.	.36	Singly, Ea.	.39

### METAL TAPE STORAGE CHEST



STANDARD CASE: Sturdy all steel carrying case. Holds 12 7" or 5" reels and cans. Twin snap locks for positive closure; perfect portability. Guards against exposure and accidental erase. Platinum gray hammer-finish. Metal separators between reels. Includes index cards. Shpg. wt., 5 lbs. ML-60 Net 2.99

2.99

### TWIST LOCK CAN .49



Twist-lock feature assures dust-free, moisture-proof storage. Center locking stud prevents reel movement on all 7" reels and most 3" and 5". Ribbed for stacking. Unbreakable styrene. Shpg. wt., 8 oz. ML-151 Lots of 6, Ea. .45 Singly, Ea. .49



### REEL LOCKS 59¢ Set of Two

Holds tape recorder reel in place by locking spindle to reel. Especially useful if recorder is in vertical position. Will not interfere with normal operation of reels. Easily removable. Shpg. wt., 6 oz. MS-564 Set of two .59

### CLEAR PLASTIC REELS .26



Individually boxed plastic reels for recording tape. Av. shpg. wt., 4 oz. singly. MS-692 5" reel. In lots of 6, Ea. .26 Singly, Ea. .29 MS-267, 7" reel. In lots of 6, Ea. .38 Singly, Ea. .45

## Grand Award

# RECORDS...12" LP STEREO HI-FI ALBUMS

LIST 4.98 ONLY **2.69** EACH

IN LOTS OF 5 **12.99**

List 24.90 Shpg. wt. 1 lb. each disc

- GA-202-SD—THE FLIRTY 30's—Got A Date with an Angel, The Object of My Affection, Three Little Fishes. STOCK NO. PR-171
- GA-205-SD—ROMAN SPECTACULAR—Charles Magnante and his orchestra. Oh Marie, O Sole Mio, Non Dimenticar. STOCK NO. PR-173
- GA-206-SD—GREAT SONG HITS OF THE TOMMY and JIMMY DORSEY ORCHESTRAS—Conducted by Bobby Byrne and the Alumnii Orchestra. Marie, Boogie Woogie, others. STOCK NO. PR-174
- GA-208-SD—PAUL WHITEMAN: HAWAIIAN HITS—Paul Whiteman and his orchestra. My Little Grass Shack, Pagan Love Song, others. STOCK NO. PR-176
- GA-213-SD—THE WORLD'S MOST BEAUTIFUL WALTZES—Strings of the Symphonia Royale. Blue Danube, Emperor Waltz, others. STOCK NO. PR-179
- GA-214-SD—AROUND THE WORLD IN 80 DAYS—Enoch Light and his orchestra. Songs include Around the World Overture, Passepartout, and more. STOCK NO. PR-180
- GA-215-SD—GIGI—Enoch Light and his orchestra and chorus. STOCK NO. PR-181
- GA-216-SD—MY FAIR LADY—Enoch Light, his Orchestra and Chorus. Songs include The Rain in Spain, Wouldn't It Be Lovely. STOCK NO. PR-182
- GA-219-SD—CORRIDA—Thrilling performances of the bullfight, played by La Banda Los Amantes de la Corrida. STOCK NO. PR-183
- GA-225-SD—THE GREAT THEMES OF AMERICA'S GREATEST BANDS—Bobby Byrne conducts the All-Star Orchestra in Moonlight Serenade, Glenn Miller; Let's Dance, Benny Goodman; and more. STOCK NO. PR-185
- GA-227-SD—HAPPY CHA CHA'S (Vol. II)—Enoch Light and the Light Brigade. Songs include Baby It's Cold Outside Cha Cha, Pretty Baby Cha Cha, etc. STOCK NO. PR-187
- GA-230-SD—BACCALONI IN STEREO—Salvatore Baccaloni in a recording of popular Italian songs he loves most... Funiculi, Funicula, Chella Lia, plus others. STOCK NO. PR-188
- GA-235-SD—SING A SONG WITH KNUCKLES O'TOOLE—The great "Knuckles," his Orchestra and his vocal Chorus of 18. Beer Barrel Polka, Casey Jones, and more. STOCK NO. PR-190
- GA-237-SD—HAWAII CALLS—Harry Hoomale and his Island Orchestra. No Ali'i, Beyond the Reef, Hawaiian Wedding Song, and more. STOCK NO. PR-191
- GA-240-SD—SING A SONG WITH KNUCKLES O'TOOLE (Vol. II)—Alexander's Ragtime Band You Made Me Love You, many more. STOCK NO. PR-192
- GA-241-SD—PAUL WHITEMAN: THE NIGHT I PLAYED 666 FIFTH AVE.—Songs include From This Moment On, Bewitched, and others. STOCK NO. PR-193
- MERCURY SPECIAL—2.69—SR-60082—CHA-CHA CHARM—Jan August, his piano and orchestra in the sensuous beat of the Cha Cha. A dozen tunes in all. STOCK NO. PR-117

### NEW! Lafayette RECORD, PLAYBACK and ERASE HEADS



3.95 per set

- Ideal for Experimenters
- Half-Track Recording Playback and Erase

A Lafayette special—ideal for the experimenter interested in tape recorders. Recording head has impedance of 9K ohm at 1000 cps. DC resistance 130 ohms. reproduction level 40 recording at 10db. Bias frequency 30KC, bias 10MA. Frequency 60 12 000 cps. SN ratio 40db. Erasing head DC resistance 10 ohms, erasing current 15.20 milliamp. AC bias, DC erase systems. Record head 7/8"x1 1/2", erase head 3/8"x1 3/8". Shpg. wt., 8 oz. F-687 Net 3.95

RECORDS ARE NOT AVAILABLE ON LAFAYETTE'S EASY PAY PLAN  
ADD 35¢ PER ORDER FOR PACKING AND HANDLING

# LAFAYETTE FOR BEST BUYS IN HI-FI

## LAFAYETTE PROFESSIONAL TURNTABLE WITH HYSTERESIS-SYNCHRONOUS MOTOR

Reg. 1961 Catalog Price 59.50

**SALE PRICE**  
**49.50**

Now At An Extra \$10.00 SAVINGS



Lafayette's famous 4 speed turntable at a new low price. The true hysteresis-synchronous motor makes it a fine precision motor in every sense — results in superior reproduction of stereo and monaural records, as well as tremendous reduction in record wear.

Outstanding Features — Wow and flutter: less than 0.2% Turntable: heavy die-cast aluminum, lathe turned for perfect balance and concentricity, 12" diameter, weighs about 4 lbs. and provides amazingly constant speed; the extra heavy rim acts just like a flywheel to prevent speed variations. True Hysteresis-Synchronous Motor: for smooth, low-noise, wow- and flutter-free

operation. Rumble and Noise: 50 db below average recorded level. Integrated Speed Controls: for 78, 45, 33 1/3, 16 2/3 rpm. 2 Oversize, Heavy Duty Idlers: Precision ground to provide positive constant-speed rim drive. Single Ball Thrust Bearing: Turntable rides smoothly over ball bearing floating on thin film of oil. Other features include free-floating, shock-mounted motor; rubber cushion shock mounts; automatic idler disengagement; rubber mat; stainless steel precision spindle; 45 RPM adapter; strobe disc. For 105-130V, 50 cps AC; draws 16 V.A. Requires 2 1/4" above and 4" below board; 14 3/4 x 12 1/4" W. Shpg. wt., 16 lbs. Net 49.50

### MONEY SAVING LAFAYETTE COMBINATIONS

SAVE \$19.50

SAVE \$32.87

Lafayette PK-245 Turntable & PK-448 Transcription Tone Arm with Moving Magnet Diamond Stereo Cartridge. Regular Price 82.00—Shpg. wt., 20 lbs. PK-518WX Net 62.50

Lafayette PK-245 Turntable with Audio Empire S-98 Tone Arm and S-108 Stereo Cartridge. Regular Price 121.50. Shpg. wt., 20 lbs. PK-519WX Net 88.63

## SENSATIONAL SPECIAL! SAVE \$10-\$15!

### World-Renowned LAFAYETTE-GOODMANS 3-Way HIGH FIDELITY SPEAKERS

• MASSIVE "MAGLOY" AND "ALCOMAX" MAGNETS—THE MOST EFFICIENT MAGNETIC MATERIAL AVAILABLE! • FREE-EDGED CONE SUSPENSION • HIGH POWER HANDLING CAPACITY • HIGH EFFICIENCY WITH LOW-DISTORTION TRANSPARENT RESPONSE • PLUG-IN 120B/OCTAVE CROSSOVER NETWORK WITH HIGH FREQUENCY LEVEL CONTROL.

#### LAFAYETTE GOODMANS 1 3/4 LB. MAGLOY MAGNET 12" 3-WAY SPEAKER

• Voice Coil 3" • 12 db Octave L.C. Network crosses over at 5,000 cps into a precision, pressure driven horn loaded tweeter. Total Magnetic Flux Density: 195,000 maxwells • Dimension 7" overall depth, 12 1/4" diam • Impedance: 16 ohms Shpg. wt.: 20 lbs.

Reg. 1961 Catalog Price 47.50



37.50

#### SK-111 1 3/4 LB. 15" MAGNET SPEAKER

Reg. 1961 Catalog Price 54.50



39.50

• Frequency Response: 30-20,000 cps.  
• Cone Resonance: 35 cps.  
• Power Rating: 30 watts

Similar to SK-110A but 15" speaker with power rating of 35 watts and cone resonance of 25 cps. Employs 1 1/2 lb Alcomax magnet and 1 3/4" voice coil, 7" deep, 15 1/4" diam. Shpg. wt., 25 lbs. SK-111WX Net 39.50

### LAFAYETTE VISCOUS-DAMPED STEREO TONE ARM — THE PROFESSIONAL 12" PK-90S

#### SUMMER SALE

- JEWEL BEARING SUPPORT
- INSTANT PLUG-IN CARTRIDGE CHANGE
- AUTOMATIC FLUID CONTROL
- PERFECT RECORD TRACKING
- ACCOMMODATES MOST STEREO & MONAURAL HIGH FIDELITY CARTRIDGES



This Stereo Monaural transcription arm assures dependable and stable operation, utilizing the floating-action principle of viscous-damping. The arm is supported at a single point by a pivot and jewel bearing having negligible friction. Damping is accomplished by a silicone fluid occupying the gap between a ball and socket. This damping control permits high compliance and negligible tracking error and prevents damage to either record or stylus should the tone arm be accidentally dropped. Low frequency resonance, skidding and groove-jumping are likewise minimized. The tone arm accepts all records up to 12" and accommodates virtually all Stereo or Monaural hi-fi cartridges by means of precisely engineered adapters which simplify installation and provide proper stylus pressure. The arm has a decorative glossy black finish. Overall length is 12"; height adjustable from 3 1/4" to 2 1/4" above motorboard; round mounting base is 2 1/4" in diameter. Shpg. wt., 2 1/2 lbs. PK-90S—12" Viscous-Damped Stereo Tone Arm Net 7.95

### LAFAYETTE 4-SPEED PROFESSIONAL TRANSCRIPTION PLAYER WITH 3 LB. 12" ALUMINUM TURNTABLE

FOR COMBINATION OFFER SEE TABLE ON THE RIGHT



PK-240W

- IDEALLY SUITED FOR STEREO! • BETTER THAN —50DB RUMBLE & NOISE • VIBRATION-LESS MOTOR SUSPENSION • BELOW 0.2% WOW & FLUTTER • MAGNETIC EDDY-CURRENT BRAKE • 3 LB. 12" BALANCED & MACHINED ALUMINUM TURNTABLE • SPEED CONTROL FOR ± 7% VARIATION OF EACH SPEED

An amazing low price for the superior quality of this fine instrument. Features include heavy, rim-weighted, 3 lb. machined-aluminum 12" turntable, magnetic brake with speed control for ± 7% variation of each speed, the extremely low noise and rumble figure of —50db below average recorded level, wow and flutter (speed variations) of less than 0.2%; new-type oversize precision-ground idler with special lubrication features; positive-locking detents on 4-speed single-knob speed selector "off" positions between all speed positions; free-floating shock-mounted motor; automatic idler disengagement in "off" positions; precision spindle turns on single ball bearing, heavy duty 4-pole induction motor. Heavy rubber turntable mat. For 105-120 volts, 60 cps AC; draws 0.13 amperes. Size of motor plate 11x10x 14 1/2" requires 4" below motor board, 1 1/2" above. Complete with stroboscopic disc, 45 rpm adapter, AC line cord. Shpg. wt., 14 lbs. PK-240W 12" TRANSCRIPTION TURNTABLE Net 37.50

Comb. No.	Turntable	Tone Arm	Cartridge	Special Net
PK-479WX	PK-240	PK-90S	Pickering 380C	62.00
PK-480WX	PK-240	PK-90S	Audio Empire 108	65.50
PK-481WX	PK-240	PK-44A	Integrated Transcription Tone Arm with Moving Magnet Cartridge	53.00


shipping weight 16 lbs.

Wood base for PK-240 (Specify Walnut, Mahogany, Blonde, Ebony Fruitwood) PK-505W 17 1/2 x 37 x 13 1/2" D. Shpg. wt. 5 lbs. Net 9.95

# SENSATIONAL LAFAYETTE 1¢ SALE!

PICKERING 380C DIAMOND STEREO CARTRIDGE, SHURE M7D DIAMOND STEREO CARTRIDGE, GE VR-227 DIAMOND STEREO CARTRIDGE OR AUDIO EMPIRE S108 DIAMOND STEREO CARTRIDGE FOR ONLY . . .

when you purchase any changer shown below



**GARRARD RC 210 PRIDE RECORD CHANGER**  
Plus PICKERING, SHURE, GE OR AUDIO EMPIRE CARTRIDGE  
ONLY **44.51**

The precision, 4-speed RC 210 record changer is wired for both stereo and monaural. Handsomely finished in sparkling white, chrome and satin black. Complete with line cord, pickup cables, plug-in shell, mounting hardware. Shpg. wt., 14 lbs. GR-133W Garrard RC 210 only Net 44.50  
Garrard RC 210 Changer PLUS Pickering 380C Diamond Stereo Cartridge. PK-475W Shpg. wt., 14 lbs. Net 44.51  
Garrard RC 210 Changer PLUS Shure M7D Diamond Stereo Cartridge. PK-521W Shpg. wt., 14 lbs. Net 44.51  
Garrard RC 210 Changer PLUS GE VR-227 Diamond Stereo Cartridge. PK-520W Shpg. wt., 14 lbs. Net 44.51  
Garrard RC210 changer plus Audio Empire S108 Diamond Stereo Cartridge. PK-476W Net 44.51



**GARRARD RC88 "MARK II" RECORD CHANGER**  
Plus PICKERING, SHURE, GE OR AUDIO EMPIRE CARTRIDGE  
ONLY **59.51**

The Garrard RC88 is a deluxe auto-manual changer wired for stereo and monaural use. Plays all 4 speeds (16, 33 1/3, 45 and 78 RPM). An outstanding performer in an attractive style. Complete with line cord, pickup lead, plug-in shell, mounting hardware, standard and manual spindles, and 45 RPM adaptor. Shpg. wt., 16 lbs. GR-126W Garrard RC88 only Net 59.50  
Garrard RC88 Changer PLUS Pickering 380C Diamond Stereo Cartridge. PK-526W Shpg. wt., 16 lbs. Net 59.51  
Garrard RC88 Changer PLUS Shure M7D Diamond Stereo Cartridge. PK-527W Shpg. wt., 16 lbs. Net 59.51  
Garrard RC88 Changer PLUS GE VR-227 Diamond Stereo Cartridge. PK-528W Shpg. wt., 16 lbs. Net 59.51  
GARRARD RC 88 PLUS Audio Empire S108 Diamond Stereo Cartridge. PK-547W Net 59.51



**LESA CD 2/21 AUTOMATIC CHANGER**  
Plus PICKERING, SHURE, GE OR AUDIO EMPIRE CARTRIDGE  
only **44.51**

Fully automatic jam-proof Lesar changer plays up to eight records of any size, with automatic intermix. Easy to operate — only two controls for all cycles, speed selection, start, stop and reject. Shpg. wt., 17 lbs. G-195W Lesar changer, less base & cartridge Net 44.50  
LESA CD 2/21 PLUS Pickering 380C Diamond Stereo Cartridge. PK-506W Shpg. wt., 17 lbs. Net 44.51  
LESA CD 2/21 PLUS Audio Empire S-108 Diamond Stereo Cartridge. PK-507W Shpg. wt., 17 lbs. Net 44.51  
LESA CD 2/21 PLUS GE VR-227 Diamond Stereo Cartridge. PK-539W Shpg. wt., 17 lbs. Net 44.51  
LESA CD 2/21 PLUS SHURE M7D Diamond Stereo Cartridge. PK-538W Shpg. wt., 17 lbs. Net 44.51  
GR-197 Automatic 45 RPM Spindle Net 3.75  
Base for changer — specify mahogany or blonde. GR-196W Shpg. wt., 3 lbs. Net 4.75



**GARRARD MODEL "A" AUTOMATIC TURNTABLE**  
Plus PICKERING, SHURE, GE OR AUDIO EMPIRE CARTRIDGE  
ONLY **79.51**

The Garrard Model "A" is a precision turntable and tone arm with the convenience of automatic record changing. Plays all 4 speeds and is wired for stereo and monaural use. Features a built-in stylus pressure gauge. Complete with line cord, pick-up leads, plug-in shell, mounting hardware, standard and manual spindles, 45 RPM adaptor. Shpg. wt., 19 lbs. GR-166WX Garrard Model "A" Net 79.50  
Garrard Model "A" plus Pickering 380C Diamond Stereo Cartridge. PK-523WX Shpg. wt., 19 lbs. Net 79.51  
Garrard Model "A" plus Shure M7D Diamond Stereo Cartridge. PK-524WX Shpg. wt., 19 lbs. Net 79.51  
Garrard Model "A" plus GE VR-227 Diamond Stereo Cartridge. PK-525WX Shpg. wt., 19 lbs. Net 79.51  
GARRARD Model "A" plus Audio Empire S108 Diamond Stereo Cartridge. PK-548WX Net 79.51



**GLASER-STEERS GS-77 RECORD CHANGER**  
Plus PICKERING, SHURE, GE OR AUDIO EMPIRE CARTRIDGE  
ONLY **59.51**

Fully automatic, 4-speed stereo record changer. Transcription-type tone arm; inaudible wow, rumble and flutter 4 pole motor. Shpg. wt., 13 lbs. GR-50WX Changer only, less base, cart. Net 59.50  
GS-77 PLUS PICKERING 380C Diamond Stereo Cartridge, less base. PK-540WX Shpg. wt., 13 lbs. Net 59.51  
GS-77 PLUS SHURE M7D Diamond Stereo Cartridge, less base. PK-541WX Shpg. wt., 13 lbs. Net 59.51  
GS-77 PLUS GE VR-227 Diamond Stereo Cartridge, less base. PK-542WX Shpg. wt., 13 lbs. Net 59.51  
GS-77 plus Audio Empire S108 Diamond Stereo Cartridge. PK-550WX Net 59.51  
Wood base for changer. Ebony with gold trim. Shpg. wt., 5 lbs. PK-350W Net 9.60  
PK-352 Automatic 45 RPM Spindle. Shpg. wt., 1 1/2 lbs. Net 2.95



**GLASER-STEERS GS-400 STEREO RECORD CHANGER**  
Plus PICKERING, SHURE, GE OR AUDIO EMPIRE CARTRIDGE  
**47.51**

Glaser-Steers 4-speed stereo record changer with automatic intermix; acoustically isolated and dynamically balanced transcription type tone arm; idler automatically disengaged in off position. GR-52W Changer only, less base Net 47.50  
GLASER STEERS GS-400 PLUS Pickering 380C Diamond Stereo Cartridge. PK-471W Shpg. wt., 14 lbs. Net 47.51  
GLASER STEERS GS-400 PLUS Audio Empire S108 Diamond Stereo Cartridge. PK-472W Shpg. wt., 14 lbs. Net 47.51  
GLASER STEERS GS-400 PLUS SHURE M7D Diamond Stereo Cartridge. PK-545W Shpg. wt., 14 lbs. Net 47.51  
GLASER STEERS GS-400 PLUS GE VR-227 Diamond Stereo Cartridge. PK-546W Shpg. wt., 14 lbs. Net 47.51  
PK-473W Black wood base for GS-400 changer. Net 5.90  
PK-352 Automatic 45 rpm spindle, 1 1/2 lbs. Net 2.95

PICKERING 380C stereo cartridge with .7 mil diamond stylus with exclusive "V-Guard." Shpg. wt., 5 oz. GD-214 Net 29.85

SHURE M7D moving magnet stereo cartridge with .7 mil diamond stylus. Shpg. wt., 5 oz. GD-273 Net 23.52

GE VR-227 magnetic, variable reluctance cartridge with .7 mil diamond stylus. Shpg. wt., 6 oz. GD-139 Net 14.65

AUDIO EMPIRE S108 stereo cartridge with .7 mil diamond stylus. Shpg. wt., 7 oz. GD-315 Net 34.50

# TRIHELIX 3 INDEPENDENT VOICE COILS ON 1 SPEAKER

An Exciting NEW Concept In Speaker DESIGN

## THE LAFAYETTE TRIHELIX

3 Completely Independent Speakers With 3 Separate Voice Coils In a Single Compact Unit

**32.50** Only 2.00 Down


- Frequency Response 30 to 18,000 cps
- Revolutionary "Conical Stiffener"
- Eccentric Baffle Mounting of Midrange & Tweeter Eliminates Interaction Between Speaker Cones
- Built-In Crossover Network and Brilliance Control
- Extremely Efficient
- High Excursion Woofer
- Ideal For Stereo

Recreates The Entire Audio Spectrum With Concert Hall Faithfulness — In a symphony orchestra, the musical sound waves generated by the scores of instruments played singly or together form incredibly complex patterns. Each instrument forms its own individual sound-wave pattern distinguishing it from other instruments. These characteristics impose severe demands on a loudspeaker, making it impossible for a single speaker to give anywhere near perfect reproduction throughout the full audible frequency range.

The Lafayette "Trihelix" represents a major breakthrough in three way speaker design. Fresh engineering concepts have resulted in a single 10-inch speaker designed expressly for use in bookshelf size enclosures, that delivers a quality of performance with the unmistakable feel, presence and clarity of a 3-way speaker system. The "Trihelix" is in effect a complete three-way high-fidelity speaker system, with three mechanically and electronically independent speakers mounted within a single 10-inch frame.

Although they are individual units the 2-inch tweeter and 5-inch midrange speakers have been especially designed to compliment the woofer. Special treatment of the cones and cone edges with polyester resins provides an even distribution of mid and high frequencies without peaks or resonances. To minimize interaction between the three cones both the midrange and tweeter units are mounted eccentrically or off center in relation to the woofer. In addition the midrange and tweeter are completely enclosed by a specially designed baffle. These unusual design features result in effectively eliminating inter-modulation distortion due to interaction between woofer, midrange and tweeter cones — a common fault in conventionally designed 3-way speakers.


The specially treated woofer cone employs a revolutionary "conical stiffener" located at the apex of the cone in order to stiffen the diaphragm and eliminate "breakup", thus providing a true piston action. This carefully designed cone-stiffening procedure, in addition to its very high compliance, enables the woofer to deliver a smooth, crisp, solid bass that balances naturally against a crystal clear midrange and natural treble. A built-in electrical crossover network with crossover points at 1500 cps and 5000 cps, allows each speaker to reproduce its portion of the audio range smoothly and efficiently. An adjustable brilliance

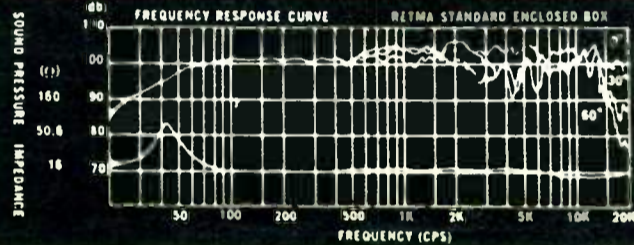

control permits matching of sound to room acoustics. SPECIFICATIONS: Overall Response 20-20,000 cps (30 to 18,000 cps = 3 db). Free Air Resonance 35-55 cps. Impedance 8 ohms. Power Rating: 20 watts Average Program Material. Crossover Points: 1500 & 5000 cps. Overall Diam: 10". Overall Depth: 7". Baffle cut-out: 8 7/8". Screw type terminals are color coded for quick easy connection of amplifier leads. Shpg. wt., 8 lbs. SK-180 10" Lafayette "Trihelix" 2.00 Down Net 32.50

SPEAKER REDUCING BOARD Adapts 10" "Trihelix" speaker to 12" speaker cabinet. Shpg. wt., 1 1/2 lbs. S3-62 Net .89

High Compliance Dual Voice Coil Stereo Woofers

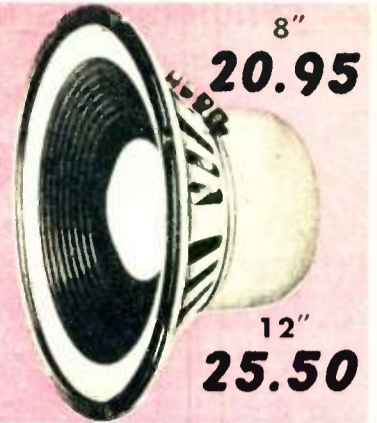

THE VERY SAME STUDIO QUALITY WOOFERS EMPLOYED IN THE LAFAYETTE CELESTIAL-SATELLITE STEREO SPEAKER SYSTEMS

Acoustical studies have shown that low frequency response is not directional... indeed the stereo effect we hear is determined by frequencies above 350 cps. This dual voice coil woofer features two electrically separate voice coils on a single woofer chassis. Each voice coil receives low frequencies from its respective stereo channel. Both of these signals are blended through the single woofer cone. This advance in woofer design now makes possible 3-channel stereo without the need of complicated costly control filters or adapter networks.

Now Lafayette offers these advanced design dual voice coil woofers for the high-fidelity enthusiast who wishes to build his own 3-channel stereo speaker system—or use it as the basis of a monoaural system now and eventually work into a 3-channel stereo system.

**12" DUAL VOICE COIL WOOFER**  
 • FREQUENCY RESPONSE 20-2500 CPS • 2 LB. ALNICO V MAGNET • 2" VOICE COIL  
 • HIGH COMPLIANCE CONE FLOATS ON ROLLED CLOTH EDGES • IMPEDANCE—EACH VOICE COIL 8-OHMS • POWER HANDLING CAPACITY 30-WATTS  
 SK-133 Shpg. wt., 10 1/2 lbs. 2.00 Down Net 25.50

**8" DUAL VOICE COIL WOOFER**  
 • FREQUENCY RESPONSE 25-3000 CPS • 2 LB. ALNICO V MAGNET • 2" VOICE COIL  
 • HIGH COMPLIANCE CONE FLOATS ON ROLLED CLOTH EDGES • IMPEDANCE—EACH VOICE COIL 8-OHMS • POWER HANDLING CAPACITY 30-WATTS  
 SK-139 Shpg. wt., 8 1/2 lbs. 2.00 Down Net 20.95

FOR CROSSOVER NETWORK KIT AND "L" PAD SEE BELOW

### CROSSOVER NETWORK KIT



Designed for use with Lafayette Dual Voice Coil Woofer (listed above). Crossover over at 350 cycles. Employs finest quality components. Complete with detailed pictorial instructions. Shpg. wt., 3 3/4 lbs. KT-161 7.26

### LAFAYETTE L PADS



Two necessary for controlling satellite level. Shpg. wt., 6 oz. VC-49 L pad for 8 ohm circuits. Net 1.39

## LAFAYETTE ELIPTOFLEX BOOKSHELF ENCLOSURE WITH SK-180 10" TRIHELIX 3-WAY SPEAKER



An ideal combination of speaker and enclosure that furnishes optimum 3-way speaker performance. Eliptoflex enclosures are finished on all four sides, for vertical or horizontal placement. Shpg. wt., 32 lbs.

SY-398WX Mahogany	5.00 Down	Net 66.50
SY-399WX Walnut	5.00 Down	Net 66.50
SY-400WX Blond	5.00 Down	Net 66.50
SY-401WX Oiled Walnut	5.00 Down	Net 66.50

## LAFAYETTE DELUXE CELESTIAL-SATELLITE SPEAKER SYSTEM

### A DYNAMIC NEW DIMENSION IN STEREO

- 12" High Compliance Dual Voice Coil Woofer With 2 lb. Alnico V magnet
- 3-Channel Wide Panoramic Sound Ends "Hole In The Middle" or "Ping Pong" Effect
- Special Crossover Network Kit • Frequency Response 20-16,000 cps.

Lafayette research and engineering facilities have evolved a new conception in stereo speaker systems. Research has established that the low bass frequencies are nondirectional. By employing a newly designed high compliance 12" dual voice coil woofer SK-133 with 2 lb. Alnico V magnet, Lafayette engineers have utilized this phenomenon. Bass frequencies below 300 cps. are directed from respective stereo channels to two electrically separate voice coils. In this manner both bass signals are blended through the single woofer cone assembly, while the two satellite speakers consisting of 2 SK-128 ultra-linear 8" biaxial speakers reproduce all the bass overtones, middle and high frequencies.

The Celestial-Satellite speaker system utilized with a normal 2-channel amplifier achieves 3-channel wide panoramic stereo without the annoying "hole in the middle" or "ping pong" effect so often found in conventional stereo speaker systems. A large symphony orchestra spreads across the entire area, while a soloist

or small musical group is properly located near the center. Conventional stereo speaker systems require large areas of space with the distance between speakers and location of the listening area in relation to these speakers extremely critical — Not so the Lafayette Celestial-Satellite Stereo system. Complete balance controls are provided for balancing low, middle and high frequency contours to individual listening tastes and room acoustics. Satellites may be placed in any position along the room (high or low) and may be separated by as much as 20 feet, with the Celestial low frequency bookshelf unit located any distance between Satellites as room decor permits. Power Handling Capacity 30 watts. Impedance 8 ohms. Shpg. wt., 27 1/2 lbs. Complete with necessary instructions, hook-up cable, crossover network kit KT-161 plus 2 VC-49 L pads. SY-396WX Only 5.00 Down Net 64.50


Same as above with 2 Lafayette SK-98 dual cone 8" speakers instead of SK-128 speakers. Shpg. wt., 25 1/2 lbs. SY-393WX 2.00 Down Net 49.50

### NEW CELESTIAL-SATELLITE SYSTEM WITH 8" DUAL VOICE COIL WOOFER

This economical 3 channel speaker system provides 3 channel wide panoramic sound from a normal standard 2 channel stereo amplifier and is essentially the same as the larger 12" Celestial-Satellite Speaker System (described above). Speakers consist of a new high compliance 8" dual voice coil woofer SK-139 with 2 lb. Alnico V magnet, two SK-128 8" biaxial speakers and a special cross-over network with balance controls. Fre-

quency response 20-16,000 cps. Power handling capacity 30 watts Impedance 8 ohms. Shpg. wt., 26 lbs. SY-397WX Only 5.00 Down Net 59.50

Same as above with 2 Lafayette SK-98 dual cone 8" speakers. Shpg. wt., 23 1/2 lbs. SY-394WX 2.00 Down Net 45.50

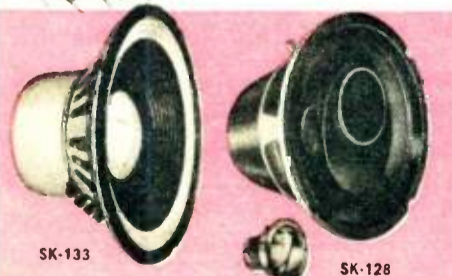


COMPLETE SYSTEM  
**64.50**  
 ONLY 5.00 Down

SPECIAL CROSSOVER NETWORK KIT



**OPTIONAL SPEAKER ENCLOSURES**  
 Satellite Speaker Enclosure: Specially designed sloping front 3 1/2" enclosure for SK-128 satellite speakers. Size: 14Wx10 1/2 Hx7 1/2 D. Shpg. wt., 9 1/2 lbs. CAB-103WX Mahogany CAB-104WX Walnut Net 12.45 CAB-125WX Unfinished Net 10.50

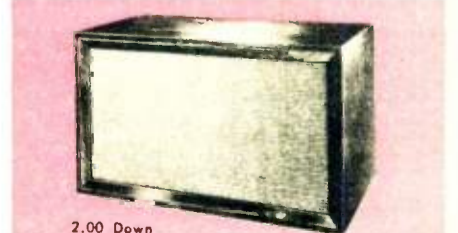

Famous Lafayette "Eliptoflex" bookshelf enclosure: Finished on 4 sides for SK-133 12" Dual Voice Coil Woofer. Size: 14Wx23 1/2 Hx13 1/2 D. Shpg. wt., 24 lbs. CAB-126WX Mahogany, CAB-128WX Walnut Net 36.50 CAB-126WX Unfinished Net 31.50 Lafayette "Mini-Duct" bookshelf enclosure for SK-139 8" Dual Voice Coil Woofer. (See "Mini-Duct" page for information.) 2.00 Down



# AN EXCITING NEW SPEAKER DEVELOPMENT

## NEW! 2- and 3-way L/C CROSSOVER NETWORK



- BUILT-IN BRILLIANCE AND PRESENCE CONTROLS
- CHOICE OF 4 CROSSOVER FREQUENCIES
- 6 CROSSOVER COMBINATIONS

14.95

This versatile unit can be used either as a 2-way or 3-way 6 db. per octave network, simply by loosening a few screws on the rear terminal panel and shifting several wires. You can use this network for a 2-way system now, easily and quickly convert to 3-way later. Six crossover combinations are available—2-way crossover with 2000-3000 cycle or 5000 cycle crossover, and 3-way with crossover frequencies of 350 and 5000, 350 and 2000-3000, 700 and 2000-3000 or 700 and 5000 cycles — a total of four different crossover frequencies! Suitable for 8-16 ohm speakers. The network is housed in an attractive metal case, suitable for mounting inside enclosure or leaving out in the open. Two level controls—Brilliance and Presence controls—are mounted on the front panel. If desired, these controls may be removed, along with the beautiful gleaming copper escutcheon plate, for external mounting; controls are wired with 3-foot long leads. High quality components are used for long life and top performance.

Net 14.95

## 2 OR 3 WAY CROSSOVER NETWORK



8.75

• EASY TO USE

• 4 CROSSOVER FREQUENCIES • 1 PAD BALANCE can be used in a two-way system by crossing over at 500 cps. • EASY TO USE • IMPEDANCE 16-OHMS The LN-7 Crossover Network combines quality performance, beauty and versatility at an unbeatable price. It can be used in a two-way system by crossing over at 500 cps or 3300 cps, and in a three-way system by utilizing the two simultaneously. The change from a two-way to a 3-way 6 db per octave network may be accomplished easily. Two level balance controls. Size: 5 1/4 x 2 1/4 x 2 1/4". Shpg. wt., 2 1/2 lbs.

Net 8.75

## LAFAYETTE-GOODMANS 3 1/2 LB. ALCOMAX MAGNET 12" 3-WAY SPEAKER

52.50

Only 5.00 Down



- Response: 30-20,000 cps
- 25-35 cps Woofer Resonance
- Horn-Loaded Compression Driver Tweeter
- 12DB Per Octave Crossover With High Frequency Level Control
- 1 3/4" Voice Coil

Superb British craftsmanship — Lafayette's direct importation brings you this famous Goodman's speaker at a record breaking low price. Designed and constructed to exacting laboratory standards this 12" 3-way speaker features a 3 1/2 lb. "Alcomax" magnet with a total flux of 185,000 maxwells. Woofer, midrange radiator and tweeter are axially mounted in a heavy die-cast non-resonant metal frame. Bass and midrange frequencies are separated at 2,000 cps by a mechanical crossover while a 12db per octave electrical crossover provides a smooth transition from woofer to tweeter at 5,000 cps. Free edge woofer cone suspension is produced by an exclusive Goodman process, eliminates standing waves and surround frequencies. Bass response down to 30 cps is smooth and solid with the stiff coned midrange and compression driver tweeter producing a natural non-strident reproduction up to 20,000 cps. Power rating is 40-watts. Overall depth 8 1/4". Shpg. wt., 25 lbs.

5.00 Down

Net 52.50

## HIGH FREQUENCY TWEETER WITH ACOUSTIC LENS

DIRECT IMPORTATION MAKES THIS PRICE POSSIBLE!

- FREQUENCY RESPONSE FROM 2000 CPS TO BEYOND AUDIBILITY
- LOUVERED ACOUSTIC LENS FOR UNIFORM SOUND DISPERSION
- HANDLES 25 WATTS OF POWER
- PRICED EXCEPTIONALLY LOW

New high frequency tweeter featuring a louvered acoustic lens for uniform sound dispersion and capable of handling up to 25 watts of distortion-free power. The directional tendency of high frequency notes is overcome by the natural wide dispersion angle of the short horn and the acoustic lens which disperses and radiates the high notes smoothly throughout the entire listening area. The lens is detachable for panel mounting, with a separate base for the tweeter furnished for external mounting where desired. Aluminum voice coil has 16 ohms impedance. Size: 4 1/4" long x 3" diameter, lens extends 2 1/2". Requires a crossover network, preferably one with a level control, such as the LN-2. With full instructions. Shpg. wt., 5 lbs.

Net 14.95

# Lafayette Presents

## THE NEW ULTRA-LINEAR SK-128

19.50

## FULL RANGE 8-INCH BIAxIAL SPEAKER WITH NEWLY

## DEVELOPED TWEETER BAFFLE DESIGN.


- 40 TO 16,000 CPS—FLAT WITHIN 3 DB
- HIGH EFFICIENCY
- HIGH EXCURSION WOOFER WITH UNIQUE "CONICAL STIFFENER"
- HANDLES HEAVY BASS PASSAGES WITHOUT "DOUBLING"

### Eccentric Tweeter Mounting & Unique Elliptical Baffle Completely Eliminates Interaction Between Woofer & Tweeter


The SK-128 combines the best features of a multiple speaker system in one compact and economical unit. It offers full, even coverage of the entire audible range, with no distortion or coloration to mar your listening pleasure. The specially treated woofer cone has a unique "Conical Stiffener" at the apex which, coupled with its high compliance, enables the cone to operate in a piston-like manner—delivering a clean, powerful bass response. The 2-inch tweeter has its own voice coil and magnetic field. Special treatment of cone and cone edge provides even distribution of the high frequencies, with no peaks or resonances. The unusual off-center mounting of the tweeter and its elliptical baffle minimizes interaction between tweeter and woofer and insures an overall response free of inter-modulation distortion. Electrical crossover from the woofer cone to the tweeter unit is provided by a built-

in network. An adjustable brilliance control permits matching of sound to room acoustics. Efficiency of the speaker is such that it will operate from any amplifier with an output of 1 watt or more. Installed in a bass-reflex type of enclosure, it performs outstandingly, and is recommended for all high-quality music systems—whether monaural or stereophonic. SPECIFICATIONS: Overall Response: 20-20,000 cps (40-16,000 cps ± 3 db). Free Air Resonance: 45-65 cps. Impedance: 8 ohms. Power Rating: 20 watts Integrated Program Material. Crossover: 2,500 cps. Overall Diam. 8 1/2". Overall Depth: 5 1/2". Baffle cut-out: 7 1/2". Rugged, vibration-free speaker frame with color-coded screw-type terminals for quick, easy connection of amplifier leads. Shpg. wt., 5 lbs.


SK-128 Full Range 8" Biaxial Speaker Net 19.50

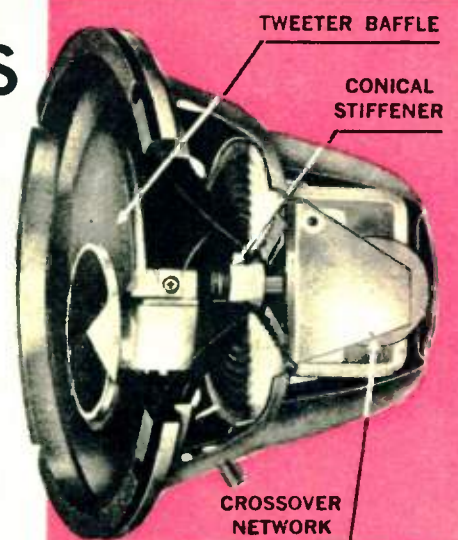

19.50

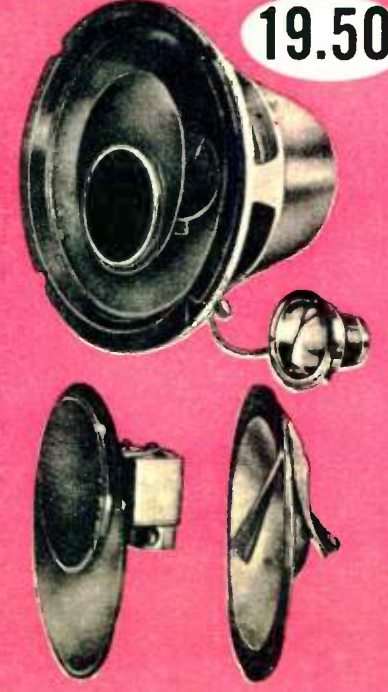

Tweeter with baffle Polyester resin treated tweeter edge

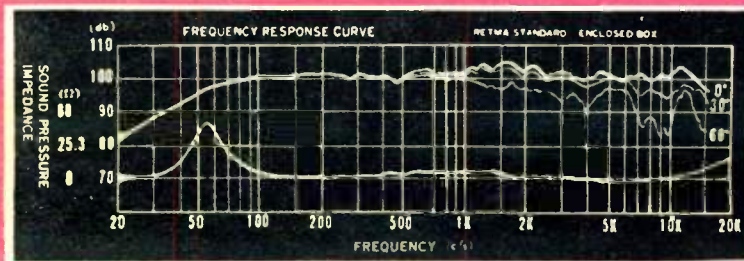

## LAFAYETTE MINI-DUCT BOOKSHELF ENCLOSURE with SK-128 8" ULTRA-LINEAR SPEAKER

The perfect answer for those who demand realistic sound reproduction even where space is limited. Two of these systems are ideal for stereo. Finished on 3 sides. Shpg. wt., 28 lbs.

SY-343WX Walnut	2.00 Down	Net 39.50
SY-344WX Mahogany	2.00 Down	Net 39.50
SY-345WX Blonde	2.00 Down	Net 39.50
SY-346WX Oiled Walnut	2.00 Down	Net 39.50
SY-347WX Unfinished Birch	2.00 Down	Net 37.50
Same as above but finished on 4 sides for vertical or horizontal placement.		
SY-403WX Mahogany	2.00 Down	Net 41.95
SY-404WX Walnut	2.00 Down	Net 41.95



# THE WIDELY ACCLAIMED SK-58 12" COAXIAL SPEAKER

Now Offered Exclusively By Lafayette At Tremendous Savings

SUPERB PERFORMANCE GUARANTEED —OR YOUR MONEY BACK!

## THE WORLD-RENOWNED Lafayette SK-58

- RESPONSE 30-15,000 CPS
- SHEEPSKIN "FREE EDGE" CONE MOUNTING
- 1 1/4 LB MAGNET WEIGHT
- 3" COAXIALLY MOUNTED TWEETER
- BUILT-IN LC NETWORK
- RATED AT 20 WATTS CONTINUOUS POWER

ONLY 2.00 DOWN

29.50



Lafayette's exclusive 12" coaxial is a precision-made high fidelity loudspeaker, universally acclaimed by music lovers, hi-fi enthusiasts and professional experts alike as the greatest performance-value on the hi-fi market. It provides a truly faithful reproduction of sound without any "coloration" or distortion, its excellence being responsible for its use in innumerable high fidelity music systems today. The SK-58 incorporates such features as heavy, high flux density TSK-5 magnets for high efficiency; 3/4" wide sheepskin cone edge suspension and special composition fibre cone material, specially treated for ultra-linear, distortion-free response; heavy rugged cast metal frame for freedom from resonances and for greater rigidity.

The coaxially-mounted 3" cone-type tweeter has a bell shaped mounting for maximum dispersion of high frequencies with no back radiation. With the built-in 3000 cps crossover network it contributes its share to the smooth delivery of the overall wide range response of 30-15,000 cps. Woofer resonance in free air is 40 cps. Speaker power handling capacity is 20 watts continuous sine wave, 35 watts peak program material. Impedance of the voice coil is 8 ohms, connections being made to chrome-plated screw terminals. Finished in gray-brown opaque enamel, the speaker is supplied complete with "brilliance" level control. Shpg. wt., 11 lbs.


SK-58W 12" COAXIAL SPEAKER

2.00 Down

Net 29.50

# The FABULOUS NEW LAFAYETTE

Engineered By Lafayette Research To Set A New Standard Of Speaker System Excellence

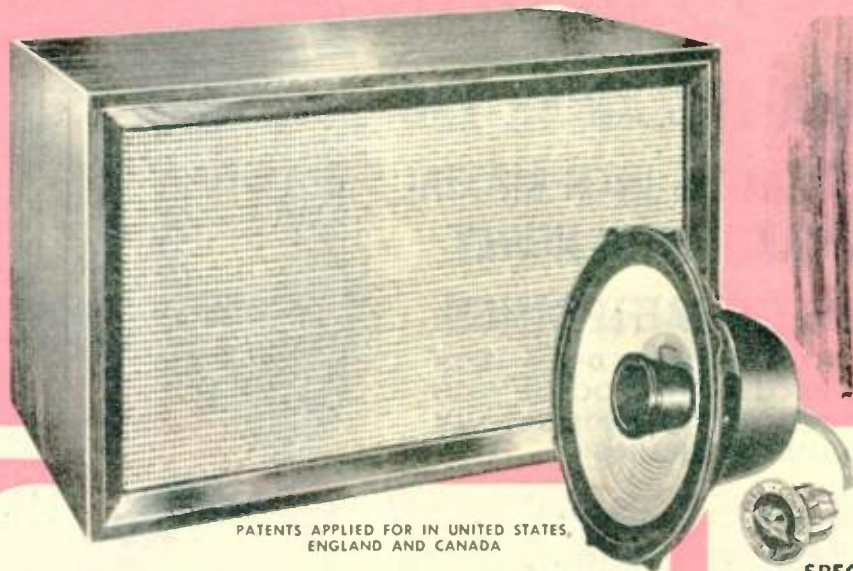

PATENTS APPLIED FOR IN UNITED STATES, ENGLAND AND CANADA

## ELIPTOFLEX

COMPLETE SPEAKER SYSTEM with ENCLOSURE

**64.50**

ONLY 5.00 DOWN

NOW IT IS POSSIBLE TO HAVE ALL THE ADVANTAGES OF A HIGH EFFICIENCY 12" SPEAKER IN A BOOKSHELF SIZE ENCLOSURE.

Adapts to any room arrangement. Place horizontally on shelves or vertically on the floor.

SPECIALLY DESIGNED 12" COAXIAL SPEAKER WITH SHEEPSKIN CONE EDGE SUSPENSION AND 1 1/4 LB. MAGNET PROVIDE A RESPONSE FROM BELOW 30 TO 15,000 CPS.

► ENCLOSURE FINISHED ON FOUR SIDES IN HAND RUBBED VENEERS.

The "Eliptoflex" is the result of an intensive research program whose 3-fold purpose was to:


- 1 Develop a speaker system that would meet the space requirements of stereo.
- 2 Utilize the full advantages of efficient 12" speaker performance.
- 3 Provide optimum performance without the use of large wattage expensive amplifiers.

The Results Were Remarkable... The Eliptoflex utilizes a unique elliptical port which broadens frequency response and provides better transient response. A specially engineered diffracting ring eliminates cancellation effects between front and rear radiation. These engineering advances are coupled with the famous Lafayette free edge SK-5E 12" coaxial speaker with 3" cone type tweeter, 1 1/4 lb. TSK-5 high-flux density magnet special 3/4" wide sheepskin cone-edge suspension and built-in and crossover network level control.

"Eliptoflex" achieves a degree of natural smoothness, low distortion and rich robust bass hitherto found only in large enclosure speaker systems or inefficient bookshelf speakers, many times its price requiring high powered amplifiers. Due to its highly efficient design characteristic the "Eliptoflex" does not require costly high wattage amplification.

The "Eliptoflex" speaker system is beautifully finished on 4 sides in a variety of hardwood veneers for attractive room placement either horizontally or vertically. Dimensions are 14" H x 23-7/16" W x 13-5/16" D. Shpg. wt., 35 lbs.

PHENOMENAL ELIPTOFLEX PERFORMANCE DUE TO:

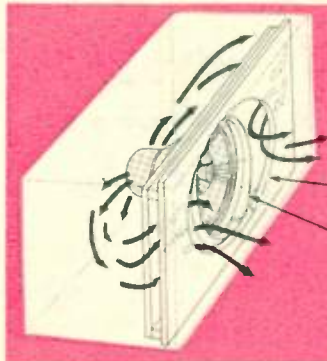

- A Newly Designed Elliptical Port
- B Specially Engineered Diffracting Ring.

### PERFORMANCE EXPLANATION

The loudspeaker is mounted on a baffle recessed in the cabinet shell with the front plate extending partially across the front surface of the baffle forming ducts or tubes from the port openings to the outside air. The elliptical cutout changes the effective length of the duct across its area. This variation in path lengths provide an extremely smooth transition from duct to free air, broadens the frequency response and provide better transient response. A triangular shaped diffracting ring mounted on the front of the baffle board virtually eliminates undesirable cancellation effects normally produced by close coupling of front and rear cone radiation. This results in a "lens" effect, changing relative particle velocities and consequently, phase relationships so as to produce a smooth transition from front to rear radiation. Comparative laboratory and listening tests indicate that "Eliptoflex" performance is demonstratively superior throughout the audio spectrum.

## SPECIAL KIT VALUE

Lafayette ELIPTOFLEX in KIT FORM

- Easy To Assemble
- 3 Sides Ready To Finish For Horizontal Placement
- 3/4" Furniture Quality Birch
- Decorative Acoustic Grille
- Interior Acoustic Padding

**21.50**  
2.00 Down

CK-14AWX Birch Eliptoflex Kit (wt., 24 lbs.)

Net 21.50

SY-381WX "Eliptoflex" Speaker System (Mahogany)	Net 64.50
SY-382WX "Eliptoflex" Speaker System (Walnut)	Net 64.50
SY-383WX "Eliptoflex" Speaker System (Blonde)	Net 64.50
SY-384WX "Eliptoflex" Speaker System (Oiled Walnut)	Net 64.50
SY-392WX "Eliptoflex" Speaker System (Unfinished furniture grade birch)	Net 59.50

### ELIPTOFLEX ENCLOSURE WITHOUT SPEAKER—FINISHED ON 4 SIDES

CAB-83WX "Eliptoflex" Enclosure—Mahogany	Net 36.50
CAB-84WX "Eliptoflex" Enclosure—Walnut	Net 36.50
CAB-85WX "Eliptoflex" Enclosure—Blonde	Net 36.50
CAB-86WX "Eliptoflex" Enclosure—Oiled Walnut	Net 36.50
CAB-124WX "Eliptoflex" Enclosure—Unfinished Birch	Net 29.50

Set of attractive Wood Runner Feet attaches on horizontal or vertical sides. Adds 1" height. Shpg. wt., 1 lb.  
 CAB-44W (Mahogany) Net 1.45  
 CAB-45W (Walnut) Net 1.45  
 CAB-46W (Blond) Net 1.45

### FINISHED ON 4 SIDES



## NEW! LAFAYETTE "Minuette" HIGH-FIDELITY SPEAKER SYSTEM

TWO FOR STEREO **23.50**  
SINGLY **12.50**



Room Filling Music Everywhere In Your Home!

- SHELF SIZE — 8 1/4"D x 15 3/4"L x 5 7/8"H • USE TWO FOR STEREO — PERFECT FOR THE SMALL APARTMENT OR LISTENING AREA • GENUINE WALNUT FINISH ON 4 SIDES • COMPLETE WITH 6' EXTENSION CABLE AND PHONE PLUG

An exceptional speaker value... the Lafayette "Minuette" Hi-Fi Speaker System will bring music to any room in your home — and for a remarkably low cost. Designed for use where space is at a premium—ideal for the small apartment or listening area. Expand your stereo system to other areas of your home... easily used in the den, kitchen, patio or bedroom. Employs a specially designed 5x7 speaker in a rear loaded reflex type enclosure. Provides an exceptionally

fine musical quality yet measures only 8 1/4"D x 15 3/4"L x 5 7/8"H — small enough to fit anywhere. Superb Walnut finish on 4 sides allows placing speaker horizontally or vertically. Frequency response 100-12,000 cps. Impedance 8 ohms. Rated at 10 watts. Supplied with 6 ft. of extension cable and phone plug. Shpg. wt., 5 1/2 lbs. SK-18T

Save — Buy two for stereo. Shpg. wt., 11 lbs. Net 23.50  
Set of two

## New LAFAYETTE ULTRA-COMPLIANCE MECHANICAL 2-WAY SPEAKER SYSTEM

- ESPECIALLY DESIGNED VENTED, TUNED, DUCT TYPE ENCLOSURE
- UNIQUE MECHANICAL 2-WAY SPEAKER WITH EXTRA HEAVY MAGNET
- BEAUTIFULLY FINISHED ON 4 SIDES
- EXCELLENT FOR STEREO
- ONLY 10 3/4" H x 18 7/16" L x 8 7/16" D

**\$17.50** OUTPERFORMS SPEAKERS DOUBLE LAFAYETTE'S LOW PRICE



COMPLETELY ASSEMBLED




Lafayette has indeed wrought a small miracle in engineering such acoustic excellence into so small a package. Smooth, distortion free response with a deep fundamental bass and clean pure highs that give no indication of its small size and price. The perfect speaker for that high quality installation in your home, office or restaurant—two are ideal for stereo.

The speaker features unique dual cone construction with extra heavy magnets. Both tweeter and woofer "float" on flexible, corrugated edges with the outer edge of the tweeter cone attached to the mid-section of the woofer cone. This results in a mechanical crossover so that both cones operate in phase at low frequencies, but only the tweeter cone operates at high frequencies. The same type of wide-range frequency response normally found only in true coaxial or multiple speaker systems is provided. Frequency response of 40-16,000 cps. Impedance 8-16 ohms. Cabinet is finished on 4-sides in hand rubbed mahogany and walnut for attractive horizontal or vertical placement anywhere in the room. Dimensions are 10 3/4" H x 18 7/16" L x 8 7/16" D. Shpg. wt., 15 lbs.

SK-124WX MECHANICAL 2-WAY SPEAKER SYSTEM Specify Finish  
 SET OF TWO SK-124WX SPEAKER SYSTEMS FOR STEREO 2.00 Down Net 17.50  
 Net 34.00

**HI-FIDELITY WOOFERS**

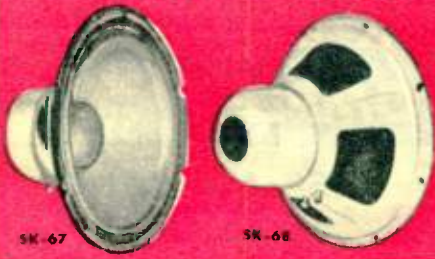

**15" HI-FI LOW FREQUENCY WOOFER**

- 31.5 OZ. ALNICO MAGNET
- 20 TO 5000 CYCLES—35 WATTS

This efficient 15" low frequency woofer incorporates many exclusive features. For original equipment or replacement, it provides highly efficient extended low-frequency response. Ideal for assembling 2- and 3-way speaker systems. Handles 35 watts of audio power. Frequency response — 2 db 20 CPS to 1000 CPS, and ± 5 db from 20 CPS to 5,000 CPS with proper baffling. Voice coil dia. 2". Impedance 8 ohms. 31.5 oz. Alnico V magnet. Finished in beautiful brown enamel. Cone is seamless type, permanently bound to voice coil. Shpg. wt., 13 1/4 lbs. Cone Resonance 45 cycles

SK-67W 2.00 Down Net 23.95

**12" HI-FI LOW FREQUENCY WOOFER**

- 21.5 OZ. ALNICO V MAGNET—25 WATT

Provides efficient, extended low frequency response of ± 5 db from 35 to 8000 CPS, and features 25 watts of power handling capacity. Perfect for high-fidelity installations or for modernization of older equipment. Ideal for assembling 2- and 3-way speaker systems at a budget price. Enclosed magnet structure—completely dust-proof. Compliance of outer cone and inner spider carefully calculated for best bass response. 21.5 oz. Alnico V magnet, 1 1/2" dia. voice coil, 8 ohm impedance. All exposed surfaces are finished in beautiful brown enamel. Shpg. wt., 8 lbs. Cone Resonance 50 cycles

SK-68 Net 15.50

**FAMOUS LAFAYETTE HK-3 METAL-CASED CONE TYPE HI-FI TWEETER**



**5.95**

- FREQUENCY RESPONSE 2000-16,000 CPS
- HANDLES 20 WATTS
- IMPORTED TO SAVE YOU MONEY

Highest quality cone type high frequency tweeter having a range from 2000 to 16,000 cycles. Especially efficient at higher end of audio spectrum where other cone type tweeters tend to lose clarity and volume. Entirely closed in a metal case with a base so that it can stand by itself or be mounted on a flat surface with mounting bracket supplied. Rated to handle 20 watts of power. A crossover network is required. The Lafayette LN-2 is ideal. Voice coil impedance 8-16 ohms. Size: 3 1/2" x 2 1/2" x 3" Diam. Shpg. wt., 3 lbs.

HK-3 Net 5.95

**METAL CASED TWEETER**

SPECIAL PRICE ONLY

**2.95**



- FREQUENCY RESPONSE 3,000-16,000 CPS
- HANDLES 20 WATTS OF POWER
- CHOICE OF 8 OR 16 OHM IMPEDANCE

The modest price of this tweeter gives no indication as to its high quality. Smooth, silky reproduction of the high frequencies along with an even sound dispersion is insured by the use of the round cone. The tweeter assembly is protected by a heavy wire mesh screen and completely enclosed in an attractive Satin Gold metal. As a result of the rear casing on the tweeter, speaker interaction between speakers has been eliminated allowing for the placement of the tweeter in the same enclosure with the woofer and mid-range speakers. Supplied with sturdy attached mounting stand and 2 1/2" ft. hook-up cord. Size 2 1/2" diam. x 2" deep. Shpg. wt., 2 1/2 lbs.

SK-121 8 ohm Tweeter Net 2.95  
SK-122 16 ohm Tweeter Net 2.95

**IMPORTED FROM DENMARK**

**ROYAL DANISH 12" DUAL CONE SPEAKER**

**Net 7.95**

- HIGH FIDELITY MODEL
- RANGE: 45-14,000 cps.
- HIGH FLUX DENSITY



Lafayette brings you this fine imported high fidelity speaker at a fraction of the price you would expect to pay for so much quality. Two cones are mounted on a single axis, and provide remarkable wide range frequency response from 45 to 14,000 cps. Reproduction of program material is exceptionally lifelike throughout the entire range. An exclusive, special formula cone rim treatment eliminates cone rim resonance and distortion. Also, the damping effect improves transient response and prevents "hangover". Overall depth, 5-3/16". Completely enclosed, 1" diameter voice coil with an impedance of 6 ohms. Shpg. wt., 6 lbs.

SK-86, 12" Dual Cone Hi-Fi Speaker Net 7.95

**Lafayette's AMAZING NEW MINI-DUCT**



**A universal ducted-port bookshelf enclosure engineered for use with 1, 2 or 3-way speaker systems.**

- SOLIDLY CONSTRUCTED OF 3/4" WOODS
- START WITH A SINGLE SPEAKER AND BUILD INTO A 2- OR 3-WAY SYSTEM LATER
- ACOUSTICALLY LINED THROUGHOUT
- AVAILABLE IN A VARIETY OF FINISHES

Now limited space need not necessarily mean limited sound. The Lafayette Mini-Duct is acoustically designed to achieve smooth, distortion-free reproduction with a remarkably full, clean extended bass response that gives no indication as to its small size. Reducing boards are supplied so that the Mini-Duct will accept an 8" Woofer, 6" Mid-Range and a variety of tweeters. This versatility makes it possible to start with an 8" speaker and eventually build into a 2-way or 3-way speaker system. Solidly constructed of 3/4" woods the Mini-Duct is beautifully finished in a variety of fine veneers. Designed for attractive placement anywhere in your home with dimensions 23" W x 11 1/2" H x 11 1/4" D. Shpg. wt., 23 3/4 lbs.

CAB-47WX MINI-DUCT IN WALNUT	2.00 Down	NET 22.50
CAB-48WX MINI-DUCT IN MAHOGANY	2.00 Down	NET 22.50
CAB-49WX MINI-DUCT IN BLONDE	2.00 Down	NET 22.50
CAB-50WX MINI-DUCT IN OILED WALNUT	2.00 Down	NET 22.50
CAB-51WX MINI-DUCT UNFINISHED BIRCH	2.00 Down	NET 19.50

Mini-Duct Enclosure finished on 4 sides for attractive horizontal or vertical placement. Choice of mahogany or walnut.

CAB-105WX Mahogany	2.00 Down	NET 24.95
CAB-106WX Walnut	2.00 Down	NET 24.95

**SPEAKER AND ENCLOSURE COMBINATIONS**

A PERFECT COMBINATION: The "Mini-Duct" enclosure and the famous Lafayette SK-98 8" mechanical 2-way speaker with patented dual cone construction. This speaker combined with the Lafayette "Mini-Duct" enclosure will give the same wide-range frequency response (40-16,000 cps) normally found only in true coaxial speakers or multiple speaker systems. Shpg. wt., 29 1/2 lbs.

COMBINATION UNFINISHED "MINI-DUCT" ENCLOSURE WITH SK-98 SPEAKER		
SY-348WX	2.00 Down	NET 26.50
COMBINATION MAHOGANY "MINI-DUCT" ENCLOSURE WITH SK-98 SPEAKER		
SY-349WX	2.00 Down	NET 29.50
COMBINATION WALNUT "MINI-DUCT" ENCLOSURE WITH SK-98 SPEAKER		
SY-350WX	2.00 Down	NET 29.50
COMBINATION OILED WALNUT "MINI-DUCT" ENCLOSURE WITH SK-98 SPEAKER		
SY-351WX	2.00 Down	NET 29.50
COMBINATION BLONDE "MINI-DUCT" ENCLOSURE [WITH SK-98 SPEAKER		
SY-352WX	2.00 Down	NET 29.50

SK-98 SPEAKER AND MINI-DUCT FINISHED ON 4 SIDES

SY-377WX MAHOGANY	2.00 Down	NET 31.95
SY-378WX WALNUT	2.00 Down	NET 31.95

Mounting boards accept all types of tweeters

**22.50**  
ONLY  
2.00 Down

MINI-DUCT BOOKSHELF ENCLOSURE

**29.50**  
ONLY  
2.00 Down

You be the Judge!



**9.95**

**NEW! LAFAYETTE 8" HI-FI SPEAKER**

- "MECHANICAL 2-WAY" SPEAKER OF UNUSUAL DESIGN
- EXTRA-HEAVY MAGNETS, EXTREMELY HIGH FLUX
- RESPONSE 40-16,000 CPS
- SPECIAL PATENTED CONE CONSTRUCTION AND MATERIAL FOR SMOOTH, DISTORTION-FREE RESPONSE
- EXCELLENT FOR STEREO

A most unusual dual-cone construction is used in these extra-high-quality 8" speakers to economically provide the same type of wide-range frequency response normally found only in true coaxial speakers or multiple speaker systems. There are 2 separate cones, acting through a common voice coil. The outer edge of the tweeter cone is attached to the mid-section of the woofer cone; both cones "float" on flexible, corrugated edges. This mounting, plus apertures provided behind the woofer cone, results in mechanical crossover so that both cones operate in phase at low frequencies, but only the tweeter cone operates at high frequencies. This gives improved high frequency directional

characteristics and minimum distortion. The patented cone materials provide extremely smooth reproduction. Magnets are large and heavy, with flux density of 10,500 gauss and total flux of 56,000 maxwells. Their high efficiency means good transient characteristics, low distortion, and good response at either high or low sound levels. Terminals are screw-type for solderless connections. Sensitivity is 99.5 db/watt; resonance is 55-70 cps; voice coil is 8 ohms. Size is 8" diam., 4 1/4" deep; requires 6 1/4" diam. baffle opening. Shpg. wt., 5 1/2 lbs.

SK-98 8" 2-WAY SPEAKER GET 2 FOR STEREO Net 9.95 Only 18.95 Net

**NEW! 6 1/2" COAXIAL SPEAKER**

- FOR EXCELLENT HI-FI SOUND
- ECONOMICAL & A SPACE-SAVER FOR STEREO
- RESPONSE 50-16,000 CPS!
- BUILT-IN CROSSOVER NETWORK
- LARGE, HEAVY MAGNETS

An excellent speaker, with all the best features of coaxial design, especially recommended for use in stereo high fidelity systems where space and/or cost are factors. The 6 1/2" woofer is provided with extra-heavy large magnets for good power sensitivity and low distortion; the 2" tweeter is a separate speaker coaxially mounted in a housing which completely seals off back radiation and with a mesh dispersion screen to provide smooth, wide-angle-dispersion high frequency response. The built-in electrical crossover

contributes to the overall smooth tonal response of 50 to 16,000 cps. Woofer resonance is 70 cps; voice coil impedance is 8 ohms. Color-coded, screw-type terminals. Requires 5 1/2" diameter cutout. Mounts with 4 equally-spaced holes. Size is 6 1/2" diam., 3 1/4" deep. Shpg. wt., 3 1/2 lbs.

SK-97 6 1/2" COAXIAL SPEAKER Net 6.95 GET 2 FOR STEREO Only 12.95 Net

ONLY 6.95 BUY 2 FOR STEREO 12.95



*If true-fidelity in music is important to you . . . . .*

**NEW! LAFAYETTE HIGH COMPLIANCE 3-WAY BOOKSHELF SPEAKER SYSTEM**

- FREQUENCY RESPONSE FROM BELOW 35 TO 18,000 CPS.
- ADVANCED DESIGN 8" HIGH COMPLIANCE WOOFER WITH 1 LB. MAGNET & 1 1/4" VOICE COIL
- 3-WAY LC ELECTRONIC CROSSOVER NETWORK
- PERFECT FOR STEREO

Lafayette designers have succeeded in achieving a standard of performance formerly associated only with very large speaker systems. The Lafayette Mini-Duct bookshelf enclosure is employed with advanced Hi-Compliance speaker design—both enclosure and speakers have been carefully engineered and matched in efficiency for a precise musical blend and balance. An unusually full, clean low frequency response is provided by the specially designed 8" woofer—indeed the quality of bass response furnished by this unit is superior to systems many times its size and price. The Hi-Compliance woofer cone is suspended by a new type of fabric edging permitting extremely wide cone excursions; the true piston action of the cone plus the use of a 1 lb. magnet and 1 1/4" voice coil not only provide a high efficiency bass response but also serve to eliminate distortion and give excellent transient response. Both the 6" Mid-range speaker and 3" Tweeter have completely sealed rear housings to prevent back radiation and interaction with the woofer. The 6 db per octave LC electronic crossover network crossing over at 750 cps and 5,500 cps employ separate balance controls for the midrange and tweeter, thereby providing precise control for balancing the speaker system to room acoustics and individual listening tastes. Handles up to 25 watts of integrated program material. Impedance 8-16 ohms. Dimensions are 23" W x 11 1/2" H x 11 1/4" D. Complete with easy to follow speaker assembly instructions. Shpg. wt., 33 lbs.



**49.95**  
5.00 Down  
5.00 Monthly

SY-358WX 3-WAY BOOKSHELF SPEAKER SYSTEM UNFINISHED BIRCH	NET 46.95
SY-359WX 3-WAY BOOKSHELF SPEAKER SYSTEM MAHOGANY	NET 49.95
SY-360WX 3-WAY BOOKSHELF SPEAKER SYSTEM WALNUT	NET 49.95
SY-361WX 3-WAY BOOKSHELF SPEAKER SYSTEM OILED WALNUT	NET 49.95
SY-362WX 3-WAY BOOKSHELF SPEAKER SYSTEM BLONDE	NET 49.95

FINISHED ON 4-SIDES

SY-375WX 3-WAY BOOKSHELF SPEAKER SYSTEM MAHOGANY	NET 52.40
SY-376WX 3-WAY BOOKSHELF SPEAKER SYSTEM WALNUT	NET 52.40



# BUILD-YOUR-OWN LAFAYETTE SPEAKER ENCLOSURES

## EASY-TO-ASSEMBLE HI-FI ENCLOSURE KITS and COMPLETE SPEAKER SYSTEMS

AT TREMENDOUS SAVINGS TO YOU!

Entire Cabinet & Plywood  
 Heavier Construction—Fully-Cured 3/4" White Birch  
 Smoothly Sanded Ready for a Fine Finish  
 Pre-Cut for Most Tweeters Or No Tweeter If Desired  
 Picture Frame Moulding Built-In  
 Tweeter Adapter  
 Pre-fab 1/2" Baffle for any Lafayette and Almost any Other Speaker System  
 For 6 1/2" or 8" Mid-range Or No Mid-range If Desired  
 Pre-Cut for 15" Woofer With Adapter for 12"  
 Supplied With Interior Acoustic Padding  
 Acoustic Grille of Decorative Plastic  
 Carefully Designed Bass Reflex Port  
 Precision Design—Parts Fit Airtight

HIGHBOY  
 LOWBOY

LAFAYETTE UNIVERSAL HI-FI BASS REFLEX ENCLOSURE KITS

**A LAFAYETTE BEST BUY AT ONLY 29.50**

• EASIEST TO ASSEMBLE—ALL YOU NEED IS A SCREW-DRIVER!  
 • 3/4" WHITE BIRCH • PRECISION-CUT—FITS TOGETHER SMOOTHLY • PERFECT FOR SINGLE WIDE RANGE, 2-WAY OR 3-WAY SPEAKER SYSTEMS • HIGHBOY OR LOWBOY STYLE

All pieces of these carefully designed bass reflex high fidelity speaker enclosures are accurately precut of 3/4" veneers to fit snugly together and eliminate spurious resonances. Front panels have picture-frame moulding and plastic acoustic grilles to blend with any finish and room decor. Tapered offset legs are protected by brass ferrules. Acoustic lining material prevents reverberation and cabinet resonance. Cutouts are provided for 15" speaker plus adapter for 12", 8 1/2" or 8" midrange plus adapter for 5" and blank wood block if no midrange speaker is used; Jensen compression horn tweeter plus adapter for Lafayette HK-3, HW-7 or Lafayette-Goodmans SK-104 tweeters plus blank wood block if no tweeter is used. Thus, any single wide-range 12" or 15" speaker may be used, or any Lafayette 2- or 3-way speaker system, or almost any other combination of speakers. Kits are supplied unfinished, smoothly sanded and ready for finishing. The lowboy-style cabinet dimensions are (less legs) 28 1/2" W x 23 1/2" H x 16 3/8" D; legs are 7" high. Highboy has same dimensions with height and width interchanged. Instructions, all parts, hardware, and grille are included. Shpg. wt., 54 lbs.

CK-10WX Unfinished Highboy Enclosure Kit	2.00 Down	Net 29.50
CK-11WX Unfinished Lowboy Enclosure Kit	2.00 Down	Net 29.50

**FINISHING KITS**

To obtain professional-like furniture finishes. Includes Varnish, Filler-stain, Sealer, Solvent, Brush, Sandpaper and instructions. Shpg. wt., 6 lbs.

MS-584 Walnut	MS-586 Fruitwood	MS-588 Golden Oak
MS-585 Mahogany	MS-587 Cherry	MS-589 Maple
MS-589 Harvest Wheat	MS-589 Ebony	

Net Each 3.50

**Factory-Assembled Bass Reflex Enclosures**

Same as the Lafayette kits above but factory-assembled and finished in lustrous, hand-rubbed mahogany or blonde to measure up to the finest standards of high quality fine-furniture finishes. Also available assembled but unfinished. Shpg. wt. 54 lbs.

CAB-13WX Highboy	CAB-14WX Lowboy	Unfinished	Net 39.50
CAB-19WX Highboy	CAB-20WX Lowboy	In Mahogany or Blonde (please specify finish)	Net 49.50
CAB-21WX Highboy	CAB-22WX Lowboy	In Walnut	Net 52.50

**5.25 6" MID-RANGE SPEAKER**

An excellent mid-range direct-radiator type speaker for installation in 3-way or 4-way speaker systems. Gives clean, distortion-free reproduction at rated power. Features closed back to eliminate interaction with sound waves generated from other speakers in the same enclosure. Rated power handling capacity 10 watts. Frequency response from 700 to 7000 cps. Magnet weight 3.16 oz. Voice coil impedance 8 ohms. Binding post type terminals. Shpg. wt., 3 lbs. SK-138 Net 5.25

**NEW! 12" THREE-WAY HI FI SPEAKER**

- Rated at 15 Watts
- Woofer, Elliptical Tweeter, and Whizzer
- Built-in Crossover
- Response 35-17,500 cps.

This new 3-way speaker answers the needs of many hi-fi enthusiasts. Featuring a dual-diameter magnet it has a frequency response of 35-17,500 cps. The elliptical tweeter gives improved sound dispersion over cylindrical types. Voice coil diam. 1", Impedance-8 ohms. Shpg. wt., 6 1/2 lbs. SK-183 Net 11.95

**8" EXTENDED RANGE SPEAKER**

- 45 to 13,000 cps
- SKIVER ROLLED CONE FOR SMOOTH RESPONSE
- 3.16 OZ. NEW TYPE MAGNET

Here is a price buster for the budget-wise hi-fi music lover. This is an extended range domestic speaker whose high sensitivity is achieved through a new hi-efficiency magnetic circuit. Ideally suited for medium and low level monaural or stereo reproduction. It has a 1" voice coil with 8 ohms impedance and will handle musical peaks of 8 watts. Size: O.D. 8 1/2"; Mtg. hole dimensions 7 1/4"; 3 1/2" deep. Brown enamel over heavily plated steel. Shpg. wt., 2 lbs. SK-106 Net 4.95

**12" COAXIAL SPEAKER**

12" Alnico V PM with 1" voice coil and heavy one-piece cone. Specially designed 3" Alnico V PM tweeter completes this combination speaker. Range 40 to 15,000 cps. Built-in high pass filter. Power rating: 12 watts. 6.8 oz. Alnico V magnet. Impedance 8 ohms. Shpg. wt., 8 lbs. SK-93W\* Net 8.75

**LAFAYETTE BEST-BUY 3 WAY SPEAKER SYSTEM**

**Famous 3-WAY SYSTEM**

with 15" WOOFER... 8" MID-RANGE SPEAKER... HORN TWEETER... CROSSOVER NETWORK

cabinet not included  
 HW-7  
 SK-74W  
 LN-5  
 SK-67W

**55.50 ONLY 5.00 DOWN**

- 15-INCH WOOFER WITH 31.5 OZ. MAGNET (SK-67W)
- 8-INCH MID-RANGE SPEAKER (SK-74W)
- NEW HIGH-FREQUENCY ACOUSTICAL LENS TWEETER (HW-7)
- 3-WAY CROSSOVER NETWORK (LN-5)

Lafayette presents this outstanding 3-way speaker system designed for the high fidelity enthusiast who desires performance formerly possible in multi-speaker systems costing many times this price. You won't believe your ears when you hear the superb reproduction throughout the entire audio spectrum. The SK-67W 15" woofer provides phenomenal bass response, the SK-74W 8" speaker delivers full bodied, mid-range frequencies, and the HW-7 high frequency acoustical lens tweeter faithfully reproduces the highest audible frequencies. Crossover points at 350 and 5000 cycles are provided by the LN-5 3-way inductance-capacitance network with continuously variable presence and brilliance controls that adjust tone balance to personal taste. Shpg. wt., 25 lbs. SY-93WX Complete system as listed above Net 55.50

**LAFAYETTE 8" WOOFER**

- Rated 30 watts
- Free edge cone
- 14.7 oz Alnico V magnet
- High Compliance
- 35 to 7500 cps

Ideal for 2 or 3 way systems where space is at a premium, this 8" woofer provides coverage from 35 to 7500 cps. The 14.7 oz magnet is extraordinarily heavy for this size speaker insuring the efficiency needed for good clean response. Other features include free edge, high compliance cone, 20 watt power dissipation, voice coil dust cover. Cone resonance 50 cycles, 8 ohm V.C. Shpg. wt., 4 1/2 lbs. SK-164 Net 10.50

**8" HI-FI WIDE RANGE SPEAKER**

50-13,000 CPS

Answers the need for a good quality but moderately priced speaker with a range of 50-13,000 cycles. An extremely smooth single cone reproducer—ideally suited for Hi-Fi systems. Excellent for limited space—good overall balance—power handling capacity 10 watts—6.8 oz. Alnico V magnet—frequency response 50-13,000 CPS when properly baffled. Rim treatment on cone minimizes possibility of diaphragm distortion. Voice coil impedance 8 ohms. Cone Resonance 85 cycles. Shpg. wt., 4 lbs. SK-69 Net 6.25

**8" MID-RANGE SPEAKER**

Ideal for use with tweeter and crossover networks to make up a 2- or 3-way system. This 8" mid-range speaker is capable of producing undistorted response down to 350 cps, the crossover frequency. Back is enclosed. Power handling capacity 25 watts. Frequency response 350-13,500 cycles. Recommended to crossover at 5000 cycles to a tweeter. Cone resonance 150 cycles. Impedance 8 ohms. Shpg. wt., 4 lbs. SK-74 Net 6.50

**EASY TO ASSEMBLE GENUINE 3/4" WALNUT OR HARDWOOD BIRCH RECORD CABINET AND ADD-ON KITS**

Complete With Matching Legs

• Each Cabinet Holds 125 LP's • Precision-machined for Easiest Assembly • Add-on-unit Doubles the Capacity • Choose from Genuine Walnut or Hardwood Birch • Compare With Cabinets Selling for Much More

Now you can store all your phonograph records in a handsome furniture piece that adds to the decor of your home. Constructed of genuine walnut you can stain or finish, or unfinished hardwood birch to paint. Expertly precision-machined at the factory—even the screw holes are set. Complete with four 4" legs, 4 ferrules, 4 brackets, 4 glides. Kit also consists of 2 side pieces, bottom, top, back plate, 4 dividers. All hardware included—all you need is a screwdriver. Complete assembly instructions. Assembled, off legs, the cabinet measures 30W x 14D x 14 1/2" H. Shpg. wt., 30 lbs.

CK-15WX Birch Unfinished Cabinet Kit with Matching Legs	Net 16.95
CK-16WX Walnut Unfinished Cabinet Kit with Birch Legs in Walnut Finish	Net 19.95

Add-on cabinet gives you double the space without doubling the price. You simply take the top board off the record cabinet, put on the add-on cabinet, and use the top board as the top of the add-on cabinet. Add-on unit kit consists of 2 sides, bottom piece, back plate, 4 dividers. Hardware and instructions included. Assembled it measures 30W x 14D x 13 1/2" H. Shpg. wt. 29 lbs. CK-17WX Birch unfinished kit Net 11.95 CK-18WX Walnut unfinished kit Net 14.95

Record cabinet and add-on cabinet with legs

**16.95 19.95**  
 3/4" WHITE BIRCH 3/4" WALNUT

**GO AS HIGH AS YOU LIKE**  
 ADD-ON CABINET KIT  
 14.95 Walnut  
 11.95 Birch

**NEW! LAFAYETTE MINIATURE HI-FI SPEAKER & ENCLOSURE**

- Attractive Mahogany Finished Wood Cabinet
- Complete With 25 Feet of Cable

**Value! 6.95**

Enjoy music everywhere in your home with this miniature Lafayette speaker system. Perfect as an extension speaker for your den, basement, kitchen or bedroom, anywhere in your home or office. Use two as extension speaker units for stereo or with your TV and Radio. Housed in a beautiful mahogany-finished wood cabinet with ventilated back cover. The 5-watt 4" x 6" speaker is designed to work from either 4 or 8 ohm outputs. System is supplied with 25 feet of cable which should meet any hook up requirement. Over-all size: 9 1/2" W x 7 3/4" H (inc. feet) x 3 1/2" D. Shpg. wt., 5 lbs. SK-109 Miniature Speaker System Net 6.95



**ECONOMY 8" COAXIAL HI-FI SPEAKER**

- PERFECT FOR STEREO • RESPONSE 70-12,000
- BUILT-IN CROSSOVER • 10 WATT RATING
- 3.16 OZ. MAGNET

A fine coaxial high fidelity speaker with built-in electronic crossover. Rated at 10 watts, with response of 70-12,000 cps. Rigid, non-resonant frame, high efficiency 3.16 oz. Alnico V magnet, specially-treated long life cone, and gasket-sealed magnet cover contribute to its fine performance. 8 ohm voice coil. Shpg. wt. 6 lbs. SK-92 LAFAYETTE ECONOMY SPECIAL! Net 5.95

**5" TWEETER AND CROSSOVER NETWORK**

LAFAYETTE SK-35

A specially designed 5" Tweeter and Crossover Network that will assure high frequency response when used with any speaker you now possess. You can now make your present speaker into a 2-way speaker system increasing the high frequency range up to 15,000 cycles. Diagram included. Shpg. wt., 5 lbs.

SY-14	Net 7.25
LN-1 Crossover Network only	Net 4.95
SK-35 5" Tweeter only	Net 2.45

### NEW Lafayette BASS REFLEX SPEAKER BOOKSHELF ENCLOSURE KIT FOR 8" or 6" SPEAKERS

#### SAVE-ON ASSEMBLY COSTS

- Precision Cut — Fits Together Smoothly
- Adapts For 8" or 6" Speakers
- Easy To Follow Pictorial Instructions
- Versatile — Use As Floor or Bookshelf Enclosure



**10.35**

Not 1/2", But 3/4" Furniture Grade White Birch

Entire Cabinet 3/4" Plywood

Smooth Sanded Ready for a Fine Finish

Built-In Picture Frame Moulding

Assembles In Less Than 30 Minutes!

Adapter for 6" Speaker

Precut for 8" Speaker

Interior Acoustic Padding

Carefully Designed Bass Reflex Port

Decorative Acoustic Grill Cloth

**BUILD IT YOURSELF**... All that's required to construct this excellent bookshelf speaker enclosure is a screwdriver and thirty minutes of your time. Expensive woodworking equipment isn't needed—each cabinet component has been precision cut and fits together perfectly. There's nothing else to buy... acoustic padding, grill cloth and hardware are provided. Use any 8" or 6" speaker; the mounting board has been precut for 8" speakers and an adapter is supplied for 6" speakers. Completely versatile—along a wall, mount in a bookshelf horizontally or place horizontally on the floor, literally adapts to any room arrangement. Constructed of 3/4" veneers throughout with handsome picture frame moulding. You save even more by finishing this kit yourself—the smoothly sanded furniture grade white birch provides a finish you'll be proud of. (See Lafayette's professional finishing kits.) Dimensions: 23" x 9 1/2" x 11". Shpg. wt., 15 lbs.

**CK-31WX** Speakers for Lafayette CK-31 Cabinet Kit Lafayette 8" Duo-Cone Speaker 40-16,000 cps response. Net 10.35

**SK-98** Lafayette 6 1/2" Coaxial Speaker 50-16,000 cps response. Net 9.95

**SK-97** Net 6.95

SEE ADJACENT PAGE FOR FINISHING KITS

### REMOTE SPEAKER FADERS and SWITCHES

- Solid Brass Plates —Satin Finish



**.89**



**Remote speaker switch**: (A) Fits standard wall box. Permits remote on/off switching of any speaker. Controls two speakers—on, off or both on. Plate size 4 1/2 x 2 3/4". With instructions. Shpg. wt., 6 ozs. MS-470 Net .89

**Remote speaker switch, panel mount**: Same as MS-470. Plate measures 2 1/2 x 2 1/8", for mounting on equipment or cabinet panel. With instructions. Shpg. wt., 4 ozs. MS-469 Net .69

**Remote Speaker Fader**: (B) Fits standard wall box. Provides adjustable volume level for radio, TV, Hi-Fi or any remote speaker. Gradually increases volume on one speaker while reducing the other. Plate size 4 1/2 x 2 3/4". With instructions. Shpg. wt., 6 ozs. VC-54 Net .89

**Remote speaker fader, panel mount**: Same as VC-54 except plate measures 2 1/2 x 2 1/8" for mounting on equipment or panel. With instructions. Shpg. wt., 4 ozs. VC-53 Net .69

### NEW GARRARD DUST COVER

- Molded From Clear Vinyl To Protect Your Garrard From Dust and Accidents.



**4.95**

An Inexpensive, Attractive Dust-Cover For Garrard Units. Molded to the contours of the player from sparkling, clear vinyl, it provides complete protection from dust and accidents to the precision bearings, levers and tone arm.

**PK-529** Type DC-1 for Garrard 210 Net 4.95

**PK-530** Type DC-2 for Garrard 88 and 88 Mark II Net 4.95

**PK-531** Type DC-3 for Garrard "A" Net 4.95

### STEREO LEVEL BALANCE CONTROL

- Dual Concentric 8 ohm L Pads
- Logarithmic Curve **2.89**

Provides individual level control for stereo speakers. Varies "brilliance" or "presence" controls stereo extensions without mismatching. Dual control mounted on concentric shaft. Gold-finished brass plate and attractive black knobs with gold trimming. L pad for 8 ohm circuits. Plate is 2 1/4" across; overall depth 3 1/4". Shpg. wt., 10 oz. VC-55 Level Control Net 2.89



### DELUXE STEREO LEVEL BALANCE CONTROL

- Dual Concentric 8 ohm L Pad
- Logarithmic Curve **3.95**



Two phone jacks enable you to plug in extension or monitoring speakers from the front. Screw terminals in the rear provide for a simple, permanent hookup. Control mounted on concentric shaft. Brushed brass plate with attractive black with gold-trim knobs. Concentric 8 ohm L pads. Use it to control volume on a second set of speakers. Plate is 4 1/2 x 2 3/4"; from front of knob to plate 1"; overall depth 3 3/8". Shpg. wt., 1 lb. VC-56 Deluxe Level Control Net 3.95

### LAFAYETTE L PADS

**1.39**



New L pads for use as "brilliance" controls to vary tweeter level, or as "presence" controls to vary mid-range speaker level. Both wirewound elements are concentrically mounted within one plastic housing. With gold-finished metal escutcheon plate, mtg screws, and attractive black knob. Size: 1 1/4" dia., 3/8" deep (less shaft), 2 1/2" deep overall. Shpg. wt., 6 oz.

**VC-49**—L pad for 8 ohm circuits Net 1.39

**VC-50**—L pad for 16 ohm circuits Net 1.39

### VOLUME CONTROL ADAPTER STEREO LINE BALANCE .98




Built-in volume control circuit permits high volume signals to be fed into the high gain input of tape recorders without overloading. Phono jack input to phono plug output. Completely shielded. Designed for use in unbalanced stereo channels; use in pairs for dual stereo channel control. Shpg. wt., 6 oz. MS-770 Net .98

### LAFAYETTE MULTIPLE 6 SPEAKER SWITCHES




**AS LOW AS 1.19**



**Multiple Speaker Switch (A)**. Constant impedance device for controlling any 6 remote speakers; up to 63 different combinations. Wall mounting with brass plate. Shpg. wt., 10 oz. With instructions and hardware. MS-459 Net 2.10

**Multiple Speaker Switch (H)**. Identical to above but mounted on flat, gold-embossed plate for mounting on flat panel. 3 1/2 x 2 3/4". Shpg. wt., 10 oz. MS-544 Net 1.19

### Easy To Assemble LAFAYETTE CUSTOM CRAFTED EQUIPMENT CABINET KIT



**NOW 35.95**  
Only 2.00 Down

**Outstanding Value!**

- 3/4" Furniture Grade White Birch
- Fine Contemporary Styling
- Room For All Your Components
- Holds Up To 150 Records

**BUILD THIS ATTRACTIVE EQUIPMENT CABINET YOURSELF AND SAVE UP TO 50%**—You needn't be a skilled cabinet maker, you don't even need special tools. An evening of your time and a simple screwdriver is all that's required to assemble this tasteful, functional cabinet. The slim low silhouette styling will enhance any room or decor and is engineered to accommodate all of your components plus room for 150 records. Constructed of 3/4" furniture grade white birch ready for finishing. Back is of 1/4" perforated hardboard to ensure adequate ventilation for equipment. Features include sliding doors with brass finger pulls plus 4" brass furred legs. Four spacious compartments are provided each measuring 13" H x 18" D x 16 1/2" W. An adjustable shelf kit for positioning components and a slide out drawer for record changers

are available at extra cost. Overall size 32 1/4" H x 35 1/2" W x 18" D including 4" legs. Complete with detailed illustrated instructions, all parts and hardware. Shpg. wt., 40 lbs.


**CK-32WX** 2.00 Down Net 35.95

Accessory Panel or Shelf Kit — Use as shelf or front panel for components. 13" x 16 1/2" x 3/8". Shpg. wt., 4 lbs. **CK-33** Net 1.50

Slide-out drawer for record changers — Installs easily in compartment. Slides extend drawer to 10 3/4". Size: 16 x 16 x 3 1/2". Shpg. wt., 8 lbs. **PK-47W** Net 6.95

SEE ADJACENT PAGE FOR FINISHING KITS

### AUDIO and PHONO ACCESSORIES

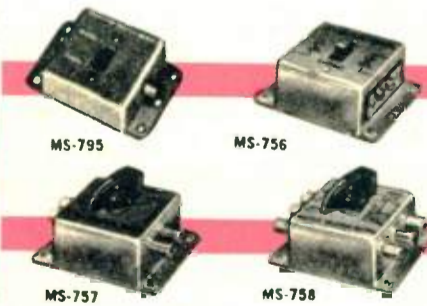

**MS-795** Net 1.59

**MS-756** Net 1.59

**MS-757** Net 1.20

**MS-758** Net 1.70

**PHONO-TUNER ADAPTER**  
2 phono jack inputs; simple switch selects either. A convenient phono output jack for connecting to amplifier. Includes mounting screws. Av. shpg. wt. for above units is 1 lb. MS-795 Net .98

**SPEAKER PHASING CONTROL**  
Allows you to reverse speaker connection to obtain correct phasing without disconnecting leads from speakers. A must for stereo. Complete with screw terminals and all mounting hardware. Shpg. wt., 1 lb. MS-756 Speaker Phasing Control Net .69

**STEREO-MONAUERAL-REVERSE SWITCH**  
Lets you switch instantly from stereo to monaural or reverses stereo channels. 2 phono jacks input... 2 phono jacks output. Completely shielded, ready to mount with all hardware. Shpg. wt., 1 lb. MS-757 Stereo-Monaural-Reverse Switch Net 1.20

**MULTI-INPUT SELECTOR CONTROL**  
Connects any one of 5 inputs to 1 output AM, FM, phono, tape, aux. Completely shielded to prevent hum. Complete with mounting hardware. 5 phono jacks input, 1 phono jack output. Shpg. wt., 1 lb. MS-758 Multi Input Selector Net 1.70

### STEREO SELECTOR SWITCH

**1.59**

- Now have stereo in every room in your home
- Permits remote selection of any 3 pairs of speakers

A constant impedance speaker selector switch for multiple-speaker Stereo Hi-Fi. Selects 3 sets of speakers in any combination, with up to 60 watts of audio power. Mounted on an attractive, gold-finished, steel, electric outlet plate. 2 3/4 x 4 1/2". Shpg. wt., 1 lb. MS-765 Stereo Speaker Selector Switch Net 1.59

### VOLUME CONTROL ADAPTER

**1.10**

**VOLUME CONTROL ADAPTER**—Same as MS-770 above except has phono jack input to a 2-conductor standard phone plug output. Shpg. wt., 6 oz. MS-769 Net 1.10

### CUSTOM SHELF ACCESSORIES

**AS LOW AS .44 per Pair**

- Designed for open-shelf Hi-Fi units
- Create your own Bookshelf—Wall—Units—etc.
- Go as High and as Wide as you choose

Change blank walls into the most functional and attractive areas in your home. Easily installed—adjust shelf height in seconds—create an infinite number of designs. Brackets are adjustable at 1" intervals; locking nut tightens against strip. Strip standards, 12" long, can be interlocked to make any length standard. Change and enlarge wall arrangements at any time. Slim standards are barely visible. Shelves have an airy, floating look.

Finish	Stock No.	Shelf Width	Shpg. Wt.	Net Per Pair
Gold	ML-272	6"	8 oz.	.44
	ML-273	8"	10 oz.	.50
	ML-274	10"	12 oz.	.64
	ML-275	12"	14 oz.	.77
Silver	ML-276	6"	8 oz.	.44
	ML-277	8"	10 oz.	.50
	ML-278	10"	12 oz.	.64
	ML-279	12"	14 oz.	.77
Black	ML-280	6"	8 oz.	.44
	ML-281	8"	10 oz.	.50
	ML-282	10"	12 oz.	.64
	ML-283	12"	14 oz.	.77

Strip Wall Standards. 12" long, interlock to any desired lengths. Shpg. wt., 6 oz.

**ML-284** Gold Net ea. .18  
**ML-285** Silver Net ea. .18  
**ML-286** Black Net ea. .18

# LAFAYETTE PANASONIC

An Integrated Stereo Transcription  
Tone Arm and Moving Magnet Cartridge  
with Diamond Stylus

**PERFECT BALANCE**—Due to its ideal balance and tracking characteristics, turntable leveling is not critical—the Lafayette Panasonic will properly track records even if the turntable is set at angles in excess of 45°

Entire Arm Shielded With Mu Metal

REG 32.50  
SALE PRICE ONLY 19.95

- Distortion Free From 20-16,000 cps
- Flat Frequency Response 20-15,000 cps
- Feather Light Stylus Pressure—Individually Adjusted For 3-Grams
- Hum Free—Entire Arm & Cartridge Case Shielded with Mu Metal
- Signal-To-Noise Ratio Over 100 DB
- Easy-To-Change Plug In Diamond Stylus Assembly
- Completely Compatible For All Records

**PLUG-IN STYLUS**  
Diamond-magnet assembly virtually constitutes a revitalization of the cartridge.




**MEETS THE MOST CRITICAL STUDIO REQUIREMENTS**—An integrated transcription tone arm and cartridge compatible for stereophonic and monophonic records. Integrating the cartridge into the tone arm provides exact alignment of the stylus in the record groove. Tone arm resonance is minimized by use of specially designed counter weight, sub weight and lateral damping mechanism. The arm counter balance is floated on a damped suspension bar, furnishing critical damping without hampering normal tone arm motion. Precision ball-bearing assembly assures an absolute minimum of lateral friction while vertical friction is practically eliminated by use of nylon bearings. Overall height of arm adjusts from 1 1/2" to 2 1/4" for use with any turntable.

The cartridge utilizes the "moving magnet" principle with extremely low stylus mass, resulting in amazingly realistic and accurate reproduction. Distortion-free frequency response from 20-16,000 cps; response is flat -2db from 20-15,000 cps. Hum and noise virtually nonexistent—cartridge coils and generating components are housed in mu-metal shielded case. Mu-metal shielding also used throughout the entire length of the arm, providing a signal to noise level of well over 100db. Stylus replacement

requires only a few seconds and may be accomplished without special skill or tools. Its unique design assures correct positioning... simply pull out the old stylus and plug in the new assembly. Since the cartridge magnet forms the shank portion of the stylus assembly, replacing the stylus virtually constitutes a revitalization of the cartridge.

Each arm is individually balanced at the factory to track at a feather-light stylus pressure of 3 grams... assures a minimum of record and needle wear. The diamond stylus is capable of supplying up to 2,000 hours of playing time. Because of its ideal balance and tracking characteristics, turntable leveling is not critical—the Lafayette Panasonic will properly track records even if turntable is set at angles in excess of 45°. Complete with 7 mil diamond stylus, mounting instructions, stylus cleaning brush and all hardware, including low-loss shielded cable for optimum high frequency efficiency. Shpg. wt. 3 lbs.

PK-448 2.00 Down Net 19.95  
Complete 7 Mil Diamond Stylus Assembly for PK-448 Lafayette Panasonic Tone Arm. Shpg. wt. 1 1/2 lbs.  
PK-452 Net 7.95

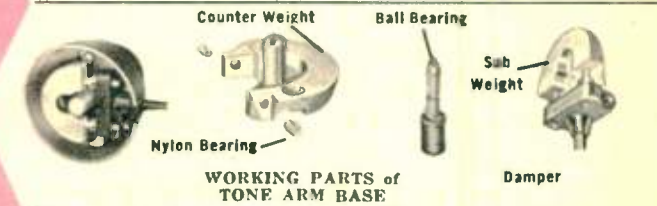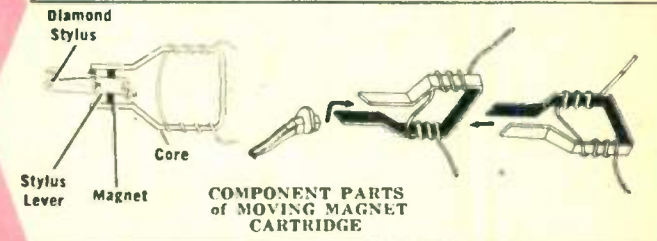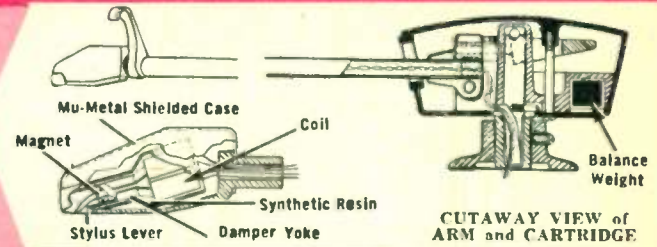

**TECHNICAL INFORMATION**  
Output Voltage . . . 5 millivolts • Channel Separation . . . More than 25 db • S/N Level . . . Over 100 db • Compliance . . . 5x10<sup>-6</sup> cm/dyne • Suggested Load Impedance . . . 50,000 ohms • D. C. Resistance . . . 420 ohms • Tracking Force . . . 3 grams • Stylus . . . 7 mil • Frequency Response . . . Distortion free: 20-16,000 cps Flat -2 db 20-15,000 cps • Overall Length . . . 11 1/2"

## NEW! REVOLUTIONARY High Frequency SPEAKER NEW!

The Revolutionary New LAFAYETTE *Sphericon* HIGH FREQUENCY SUPER TWEETER

SK-146



22.50  
Only 2.00 Down

**REVOLUTIONARY ACOUSTICAL DESIGN FEATURES**

**SPHERICAL DIFFRACTOR**  
Increases acoustic loading on the diaphragm and results in an unequalled sound dispersion.

**DOMED PHENOLIC DIAPHRAGM**  
Extremely rigid—constructed of special plastic impregnated cloth providing an extremely high stiffness to mass ratio.

**THE SPHERICON MATCHES PERFECTLY WITH ANY SPEAKER SYSTEM**

The "Sphericon" is perfect for use with the new high compliance bookshelf speaker systems. Built-in Attenuator permits matching with any low efficiency speaker system.

matched with any speaker or speaker systems... especially the low efficiency high compliance type. Precise matching of the "Sphericon" with today's low and medium efficiency speaker is accomplished by means of a special built-in attenuator designed not to affect or lower the efficiency of the woofer. As a result less amplification is needed assuring lower distortion. Power capacity is 30 watts. May be employed with any 4-16 ohm speaker. Beautifully styled with an acoustically designed gold anodized grill set in a sturdy satin black plastic case. Dimensions: 9x4Hx2 1/2"D. Shpg. wt. 4 lbs.

LAFAYETTE SPHERICON SUPERTWEETER SK-146 2.00 Down Net 22.50

LAFAYETTE *Sphericon*

TWEETER AND ACOUSTIC RESEARCH AR-2 SPEAKER SYSTEM COMBINATIONS AT MONEY SAVING PRICES



101.60  
Only 5.00 Down

SPHERICON EXTENDS THE RESPONSE OF YOUR AR SPEAKER TO BEYOND 40,000 CPS

AR-2 18" Acoustic suspension speaker system 42 14000 cps • 5 db S/N Level 13 1/2x11 1/2" Shpg. wt. 52 lbs.  
Combination of Lafayette SK-146 Sphericon Tweeter and AR-2 in Mahogany Finish Shpg. wt. 56 lbs. Net 101.60  
SY 296W 5.00 Down  
Combination of Lafayette SK-146 Sphericon Tweeter and AR-2 in Walnut Finish Shpg. wt. 56 lbs. Net 106.00  
SY 297WX 5.00 Down  
Combination of Lafayette SK-146 Sphericon Tweeter and AR-2 in Korina (Blonde) Finish Shpg. wt. 56 lbs. Net 106.00  
SY 298WX 5.00 Down  
Combination of Lafayette SK-146 Sphericon Tweeter and AR-2 in Delaminated Pine Shpg. wt. 56 lbs. Net 95.65  
SY 299WX 5.00 Down

## NEW! LAFAYETTE STUDIO QUALITY STEREO HEADPHONES

ONLY 13.95

UNEQUALED VALUE & PERFORMANCE!

- Response—25-17,000 cps
- Actually 2 Dynamic Hi-Fi Speakers
- Light-Weight Aluminum Construction
- Foam Rubber Ear Pads Provide Comfort & Prevent Loss of Bass Response

Radically different from conventional earphones, these Lafayette stereo 'phones actually contain two small high fidelity dynamic speakers in specially designed casings. These 2 1/2 inch units provide a frequency range of 30-15,000 cycles. Extremely comfortable due to foam rubber ear and head pads. Ideal for stereo or monaural; 8 ohm impedance on each channel (4 ohms with both sides connected together) enables a direct attachment to amplifier output. Seven foot cord has two-circuit phone plug. Shpg. wt., 2 lbs. F-618 Net 13.95

JUNCTION BOX

For connecting stereo headphones to an existing system without the need of continually disconnecting speakers. Impedance 4-16 ohms. Has separate earphone jacks for stereo or monaural, separate volume controls for each side of the headset, and a speaker on-off switch. 4 1/2x1 1/2x1 1/4"D. Shpg. wt., 1 1/4 lbs. F-641 Net 4.59

OUR FINEST PORTABLE SPECIAL!

89.50  
5.00 Down

Plays Both STEREO and MONAURAL

- FULLY AUTOMATIC GARRARD CHANGER
- TWO POWERFUL 10 WATT AMPLIFIERS
- SECOND SPEAKER EASILY DETACHED • 3 SPEAKERS

A complete portable and compact stereo phonograph in one convenient case. System uses the well-known Garrard RC-210 4-speed stereo changer which features true intermix of 12" and 10" records in any order with instant selection of either automatic or full manual operation. Uses a stereo turnover cartridge to play all your records—whether monaural or stereo. Two powerful 10 watt amplifiers provide a frequency response of 50 to 12,000 cps. Controls included: Master Volume; Remote speaker volume; Master treble; Master bass. Detachable front speaker cabinet houses a 6" x 9" speaker with 9 ft. extension cord. Main unit houses two speakers—one 6" x 9" woofer and one 4" tweeter. Phonograph has easy-grip handle on attractive smart-looking Pyroxylin covered case. Size: 23x15 1/2x9 1/4". Shpg. wt., 40 lbs. Available in choice of 2 attractive coverings.

PH-146WX Black Branch 5.00 Down 89.50  
PH-147WX Luggage Tan 5.00 Down 89.50


PHONO!

9 Ft. Extension Cord

PRICED EXTRA LOW!  
COMPARE FOR VALUE



## NEW TruTest STEREO/5 AMPLIFIER

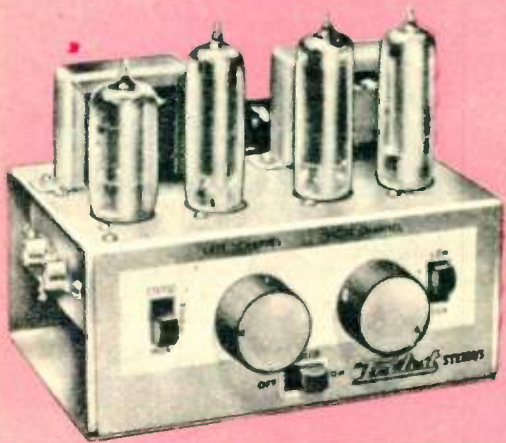

- Individual Stereo Volume-Balance Controls
- For Both Stereo and Monaural
- Fully Wired—Ready For Stereo

Only **9.95**



One of the finest stereo values we have ever offered. This rugged, precision made dual channel stereo amplifier will amaze you with its fine quality. Ideal for that low cost stereo system you're planning for your home or business. Perfect for converting your present console or portable to stereo. Controls include separate left channel and right channel volume controls, stereo-

monaural mode switch, tone control switch and on-off switch. Provision for crystal or ceramic cartridge. 4 ohm output terminals, accept most speakers. Tube complement: 2-35C5, 1-35W4 and 1-12AX4. Size: 4 1/2" H x 5 1/2" W x 4 1/2" D. 115 volt 60 cycles. Shpg. wt., 5 lbs.

PK-441W Net 9.95

## LAFAYETTE BRINGS YOU A COMPLETE STEREO PHONO SYSTEM AT A PRICE YOU CAN AFFORD

**32.50** only  
2.00 Down

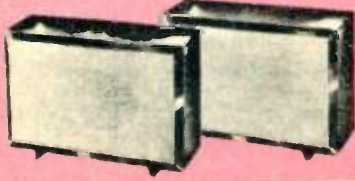

Now you can have genuine component stereophonic sound at the lowest price ever. Complete in every detail this system consists of: the TruTest Stereo/5 Amplifier (as described above), Lafayette ML-24 4-speed Turntable for 16 1/2, 33 1/3, 45 and 78 rpm records, easy to install pre-cut mounting board, Lafayette PK-171 Stereo Tone Arm with wide-range Plug-in Crystal

Stereo Cartridge and 75 mil sapphire styli for stereo and monaural records. Completing the system are 2 of Lafayette's amazing SK-109 miniature speaker systems. Housed in attractive mahogany veneer enclosures each speaker is supplied with 25 feet of hook-up cable and measures only 9 1/2" W x 7 1/4" H x 3 1/4" D. Shpg. wt., 20 lbs.

PK-143WX 2.00 Down Net 32.50

## FINAL CLOSEOUT QUANTITY LIMITED



**.99** ea.  
lots of 6, .90 ea.

### HI-FI TURNOVER CARTRIDGE

- 40-14,000 CYCLES (PK-79)



**.99** ea.  
lots of 6, .90 ea.

### 3 VOLT TURNOVER CARTRIDGES

- High Output: 3 volts
- Turnover Mechanism
- Dual Sapphire Styli
- Excellent Frequency Response

Never before has a turnover cartridge of this quality been offered at such a price. Frequency response from 40-14,000 cycles — 2 db! Has 2 sapphire styli to play all speeds and types of records. Needle pressure required is only 5 grams on LP and 12-15 grams on 78 RPM. Output is 5 volts. Comes complete with turnover mechanism and knob. Fits Webster, Garrard, VM, Collaro and tone arms of other leading manufacturers of record changers and players. This is one of the outstanding Lafayette values.

PK-79—Singly, each .99 in lots of 6, each .90  
PK-84—Sapphire LP Replacement Needle .29  
PK-85—Sapphire STD (78) Replacement Needle .29

Lafayette has gone all out to provide for the serviceman a replacement turnover phono cartridge at a price never before attained. Here is a crystal cartridge complete with 2 sapphire styli, turnover mechanism, mounting bracket and knob—with sufficient output to use in any record player—and yet of fine quality. All at a price that enables you to use it on any repair job. Length, (less knob) 2 1/4". Ease of mounting assured by two sets of mounting holes each set with 1/2" centers.

PK-80—Singly, each .99 in lots of 6, each .90  
PK-86—Sapphire LP Replacement Needle .29  
PK-87—Sapphire STD (78) Replacement Needle .29

## EXTRA LOW PRICED ALL-SPEED MONAURAL PHONOGRAPH

"LEADER"  
4 SPEED MANUAL

**13.95**



Plays up to 12" monaural records at 16 1/2, 33 1/3, 45 or 78 RPM. A single lever selects any speed. The lightweight pickup arm is equipped with a single all-purpose needle for all records. Has volume control with on-off switch. Fine quality Alnico 5 PM speaker. Attractive leatherette covered case. For 110-120 volts, 60 cycles. Size 12x10 1/2x5 1/2". Shpg. wt., 9 lbs.

PH-138W Net 13.95

STANDARD  
4-SPEED MANUAL

**18.45**



With this portable phonograph you can play any record up to 12" size at 33 1/3, 45 or 78 rpm, or at the new "Talking Book" speed of 16 1/2 rpm. A single lever selects any speed. The lightweight pickup arm is equipped with a turnover cartridge with dual sapphire styli. Has both tone control and volume control with on-off switch. Has jack for adding extension speaker. Fine quality Alnico 5 PM speaker. Attractive 2-tone leatherette covered case. For 110-120 volts, 60 cps. AC. Dimensions 14x10 1/2x6". Shpg. wt., 10 lbs.

PK-139W Net 18.45

## LAFAYETTE HI-FI STAR BETTER THAN EVER

- For All Monaural Records
- GE Reluctance Triple Play Cartridge With 2 Sapphire Needles
- Dual Speakers: 6" Wide Range and 4" Tweeter

The famous Lafayette "Star" now incorporates an extended-range speaker system with 50 to 15,000 cps response. The 4-speed phonograph plays all record sizes up to 12" and has the famous GE variable reluctance "triple play" cartridge with two sapphire tipped needles. With retractable spindle for 45 rpm records. Separate bass and treble tone controls and volume control. The 2 speakers produce a real feeling of "presence". Size 18x12 1/2x7 1/4". Covered in your choice of charcoal or light tan shadow branch parchment leatherette. For 110-120 volts, 60 cps AC. Shpg. wt., 13 lbs.

PH-136W Charcoal Black 2.00 Down Net 37.50  
PH-137W Light Tan 2.00 Down Net 37.50

**37.50**

2.00 Down



AS LOW AS **1.69**

### MONAURAL DUAL SAPPHIRE

Replaces Astatic 81T and E.V. 81. Has 1 mil. and 3 mil. sapphire styli.

### MONAURAL DIAMOND-SAPPHIRE

Replaces Astatic 81TX and VE.. 81-DS. Has 1 mil. diamond and 3 mil. sapphire styli.

**SALE! PLUG-IN CARTRIDGES EXACT REPLACEMENT FOR ELECTROVOICE POWER POINTS AND ASTATIC SOUND-FLO CARTRIDGES**

### STEREO DUAL SAPPHIRE

Replaces Astatic 13T and E.V. 13. Has .7 mil. and 3 mil. sapphire styli.

### STEREO DIAMOND-SAPPHIRE

Replaces Astatic 13TX and E.V. 13DS. Has .7 mil. diamond and 3 mil. sapphire styli.

**SALE**



**5.95**

**OVER 45% OFF CATALOG PRICE!**

## SONOTONE 3TSD DIAMOND CARTRIDGE

Regular catalog price 10.88

Lafayette lowers the price on this famous Sonotone 3TSD wide-range cartridge to save you over 45%. This deluxe, ceramic, turnover cartridge, with diamond and sapphire needles, is ideal for monaural records of all speeds. Features an extended response of 20-15,000 cps with gradual roll-off to 20,000 cps. 6 grams tracking; 0.5 V output — requires no preamp. Standard 1/2" and 5/8" mounting centers. ONE OF THE MOST OUTSTANDING CARTRIDGE BUYS. Shpg. wt., 3 oz.

PK-345 Net 5.95

## REPLACEMENTS FOR RONETTE CARTRIDGES

**1.75**



Mi-Fidelity cartridge for use in Collaro, Webcor, Garrard, VM and many players using Ronette cartridge type TO-284V or similar equipment with 2-sapphire styli for LP and 78. Output is .7 volts. Frequency response 30 to 15,000 c.p.s. Complete with turnover mechanism and knob. Will fit most tone arms. Shpg. wt., 6 oz.


PK-450 Net 1.75

### HIGH OUTPUT MODEL

Similar to above to replace Ronette TO-222 and similar units. Output 2.2 volts. Frequency response 30-12,000 c.p.s. Shpg. Wt., 6 oz.

PK-451 Net 1.75

**2.75**

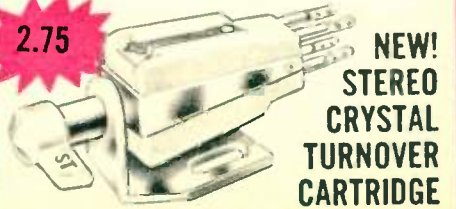

## NEW! STEREO CRYSTAL TURNOVER CARTRIDGE

- EXCELLENT FREQUENCY RESPONSE
- HIGH OUTPUT
- LOW TRACKING FORCE
- DUAL SAPPHIRE STYLI

Another instance of Lafayette special value for you: a stereo crystal turnover cartridge at such a low price. Frequency response 40-14,000 cps. Tracks with low stylus pressure and high output voltage. Excellent channel separations for stereo effect. Supplied with turnover mechanism, knob and dual sapphire styli to play records of all speeds. Completely compatible. Fits all standard arms. Shpg. wt., 6 oz.

PK-258 Net 2.75

### REPLACEMENT STYLI

PK-281—Sapphire Stereo LP Net .69  
PK-282—Sapphire STD (78) Net .29  
PS-86—DIAMOND Stereo LP Net 2.59

## PHONO CARTRIDGES 3.5 VOLT OUTPUT

**PK-11**

**1.29**



Guaranteed high quality exact duplicates for direct replacement of all standard cartridges such as L70, L82, L92, W60B, N10, and many others. Pin plug connectors for all 78 r.p.m.

PK-11 each 1.29

## STEREO TONE ARM with CRYSTAL STEREO CARTRIDGE



COMPLETE **2.95**

An exceptional value! A stereo tone arm ready for use with all stereo and monaural LP records at an amazingly low price. Modern, plastic, straight line design with off set plug-in head which has a wide-range stereo cartridge with single sapphire styli. Output is 1 volt per channel — high enough to connect directly to basic amplifier. Stylus pressure adjustable by variable spring tension. Has finger-lift for ease in handling. Mounts easily — requires only one 3/16" hole and is secured by single locknut. May be mounted on turntable base of up to 1/4" thickness. Easy height adjustment at base of arm. Overall length 10". Finished in gleaming black with gold trim. Shpg. wt., 1 lb.

PK-171 Stereo Tone Arm with cartridge Net 2.95  
PK-172 Replacement cartridge Net 1.95  
PS-576 Replacement needle Net .69

## SONOTONE 2T-S (Supersedes 9980-S) Turnover Ceramic Cartridge


This cartridge is used to replace Astatic AC, ACD, CAC, GC, LQD, ELECTRO-VOICE 16TT, 33, 43, 46T, 96T; SHURE WC series from WC22 to WC36, W22, W26; WEBSTER ELECTRIC AX, A1, A9-1. It is to be used on VM, Columbia 360, Webster, Crescent record changers and many other types now in use. Will give such hi-fi characteristics as extended frequency range and absence of distortion far beyond most cartridges it replaces—all with the added advantages of ceramic safety from humidity and heat. Has 1 mil stylus for LP records and 3 mil for standard—both sapphire. Shpg. wt., 8 oz.

PK-40—in lots of 5, ea 2.95  
Singly, ea. 3.25

**PK-168**  
**LAFAYETTE SPECIAL!**

**1.25**

RCA "45" REPLACEMENT



## REPLACEMENT CARTRIDGES FOR RCA 74067

- Replacement for cartridges in many thousands of RCA45 and many LP record changers.
- 1 MIL SAPPHIRE STYLUS • 2.3V OUTPUT • HIGH IMPEDANCE CRYSTAL • TAKES 7-10 GMS PRESSURE
- 5/8" MTG CENTERS

EXACT REPLACEMENT FOR MANY STANDARD 45 RPM and 33 1/2 RPM CARTRIDGES

PK-168 Net 1.25  
Sapphire replacement stylus for PK-168 Net .99  
PS-555 Net .99

# DIAMOND STYLI AT LOWEST PRICES ANYWHERE

## LAFAYETTE DIAMOND and DIAMOND-SAPPHIRE STYLI

MADE FOR LAFAYETTE BY THE FOREMOST AMERICAN MANUFACTURERS

### KEY TO POINT CODES HOW TO ORDER

The symbols in the column headed "PT SIZE" are explained in the table below.

- LP—SINGLE 1 MIL MICROGROOVE FOR 33 1/3 AND 45 RPM
- AG—SINGLE 2 MIL ALL GROOVE FOR ALL SPEEDS
- ST—SINGLE 3 MIL STANDARD FOR 78 RPM
- COMB—DUAL 1 MIL DIAMOND AND 3 MIL SAPPHIRE

Identify your needle by cartridge number and illustration and order by stock no. Note that all needles listed here are for monaural cartridges.

### ALL DIAMOND STYLI ARE NOT ALIKE

- MADE FROM WHOLE DIAMONDS
- PRECISION GROUND AND POLISHED
- VERTICALLY AND EDGEWISE GRAIN ORIENTED
- SHADOWGRAPHED



Each Lafayette's diamond stylus is made from individual diamond properly oriented and ground to close tolerance; shadowgraph tested to give you less wear per play and long service life.

The synthetic sapphire used in these styli are of the same fine quality used in precision watch bearings.

1 YEAR REPLACEMENT GUARANTEE AGAINST DEFECTS IN WORKMANSHIP AND MATERIAL

# 2.59

ANY DIAMOND OR DIAMOND-SAPPHIRE NEEDLE IN THIS LISTING

## STEREO DIAMOND STYLI AT LAFAYETTE'S 2.59 Low Prices!



Stylus Stock No. Fig. For Cartridges

PS-88	G	ACOS 73 .7 mil diamond and 3 mil sapphire styli No. 73-1
ADMIRAL CARTRIDGES		
PS-80	C	409333-1-1(2-1)
PS-81	B	409C37-1
ELECTROVOICE CARTRIDGES		
PS-80	C	21 and 26 Series
GENERAL ELECTRIC CARTRIDGES		
PS-87	A	GC7
PS-89	A	VR277
MAGNAVOX CARTRIDGES		
PS-80	C	560233-3-4
MONARCH (BSR)		
PS-86	F	TC85, TC-85H
MOTOROLA CARTRIDGE		
PS-80	C	59K64335
PS-81	B	59B645397
PERPETUUM-EBNER		
PS-81	B	PE9G (M, N)
PHILCO CARTRIDGES		
PS-80	C	35-2809-1, 35-2824-1, 325-3047, 35-2825-1, 325-8036
PS-81	B	35-2420-1, 35-2826-1, 325-8048, 325-8049
PS-86	F	35-2627-1, 35-2829-1, 325-8051, 325-8052
RCA CARTRIDGES		
PS-81	B	T, T-1
PS-85	E	106770-1, 106690, 108213,
PS-86	F	108718
RONETTE CARTRIDGES		
PS-81	B	OV, OV1, T1 Single BF40 105, 105-1 (2,3,4), 106-1(2,3,4)
SONOTONE CARTRIDGE		
PS-82	D	Combination 7 Mil (stereo) diamond and 3 mil (78RPM) sapphire for BT and BTA
SONOTONE		
PS-83	D	Same as above but with .7 mil (stereo diamond) and 1 mil (monaural LP) sapphire
TELEFUNKEN CARTRIDGE		
PS-90	H	T20-2
VM CARTRIDGES		
PS-80	C	16707-A
PS-82	D	16708-F
WEBCOR CARTRIDGES		
PS-80	C	21P573
PS-81	B	21P595, 21P598
PS-82	D	21P700-1-2-3-4
ZENITH CARTRIDGES		
PS-81	B	142-999



### DIAMOND NEEDLES

STOCK NO.	SIZE	FIG.	CARTRIDGE	REPLACES JENSEN NO.	STOCK NO.	SIZE	FIG.	CARTRIDGE	REPLACES JENSEN NO.	STOCK NO.	SIZE	FIG.	CARTRIDGE	REPLACES JENSEN NO.					
<b>FOR ADMIRAL CARTRIDGES</b>																			
PS-10	LP	1	409A11, 409A300, 98A54-1	JPS-30LPD	PS-35	LP	54	560176, 560180	CRA-55LPD	PS-35	LP	53	TO-200, TO-222, TO-284, TO-400 series, RA284, DT60 series, TX88, A	CRA-55LPD					
PS-16	COMB	6	409B21	JPS-35SD	PS-70	COMB	51	560161	S-66SD	PS-69	LP	38	TX88, A	CRA-56LPD					
PS-17	LP	7	409A30	A81LPD	<b>FOR PHILCO CARTRIDGES</b>														
<b>FOR ASTATIC CARTRIDGES</b>																			
PS-20	LP	3	AC Series, 40T, 41T, 40-1, 41-1, 42-1, 90T series, 10L-3, 11L-3	A-75LPD	PS-56	COMB	43	45-9612, 76-4649, 425-0016	PH-13SD	PS-16	COMB	6	WC10, WC10D, PC2 series, PC3 series, PC4 series, PC5 series	JPS-35SD					
PS-23	LP	12	408	M-70LPD	PS-56	COMB	43	45-0009, 425-0011, 425-0014	PH-13SD	PS-10	LP	1	P-72, P-73, P-73R, P-75, P-76, P-77, P-80, W-21, W-21AR, W-22A, WC-24, WC-25 Series	JPS-30LPD					
PS-25	COMB	14	CCD, 409, 55-T, 55TJ, 55TM	A-71SD	<b>FOR PERPETUUM EBNER CARTRIDGES</b>														
PS-23	LP	12	410	M-70LPD	PS-44	COMB	47	P12/RG	RX550SD	PS-70	COMB	51	3T, 3T5, 3TD	S-61SD					
PS-17	LP	7	CAC, CO, CO-1, LQD, LQD-1, QT, QT-33, 44-T, 46-1, 48-1, 166T Series	A-81LPD	PS-45	COMB	48	PE-8, PE10	RX551SD	PS-17	LP	7	BX	A-81LPD					
PS-35	LP	54	118, 120, 124 series, 310T, 312T, 420, 422, 424TS series, 310-1, 310-TB, TS, 312-TB, TS, 414-1	CRA-55LPD	PS-66	LP	22	P7000 (M), (D) (LP only)	RX552LPD	PS-10	LP	1	F11	JPS-30LPD					
<b>FOR MAGNAVOX CARTRIDGES</b>																			
PS-51	COMB	37	560176, 560180, 560133, 560151, 560169-1, 560170	M-50SD	PS-23	LP	12	74067	M-70LPD	PS-10	LP	1	55652, 76257, (988370-1), 75044	JPS-30LPD					
<b>FOR GE VR II CARTRIDGES (FIG. 35)</b>																			
Direct replacements for clip-in styli in GE VR II series models 4G-050, 4G-052, 4G-053, 4G-040, 4G-041, 4G-063, 4G-061 cartridges. Avg. shpg. wt., 2 oz.																			
PS-48—1 mil diamond LP clip-in stylus. Replaces GE 4G-010 Net 2.59																			
PS-546—1 mil sapphire LP clip-in stylus. Replaces GE 4G-015 Net 1.15																			
PS-548—3 mil sapphire 78 clip-in stylus. Replaces GE 4G-035 Net 1.15																			
<b>MODERNIZATION ASSEMBLIES (FIG. 33)</b>																			
Modernize your old triple-play cartridge. These assemblies replace both the old and new series "A." Once installed, you can replace one point at a time.																			
DIAMOND SAPPHIRE. Replaces old RPJ-013 and new RPJ-013A. Avg. wt., 2 oz. Net 2.59																			
PS-46—list 31.00																			
DUAL DIAMOND. Replaces old GE RPJ-012 and new RPJ-012A. Net 7.95																			
PS-79—list 49.95																			
DUAL SAPPHIRE. Replaces old GE RPJ-010 and new RPJ-019A. Net 2.10																			
PS-545—list 5.95																			

### REPLACEMENT STYLI FOR GE CARTRIDGES

Direct replacements for clip-in styli in GE VR II series models 4G-050, 4G-052, 4G-053, 4G-040, 4G-041, 4G-063, 4G-061 cartridges. Avg. shpg. wt., 2 oz.

PS-48—1 mil diamond LP clip-in stylus. Replaces GE 4G-010 Net 2.59

PS-546—1 mil sapphire LP clip-in stylus. Replaces GE 4G-015 Net 1.15

PS-548—3 mil sapphire 78 clip-in stylus. Replaces GE 4G-035 Net 1.15

**MODERNIZATION ASSEMBLIES (FIG. 33)**

Modernize your old triple-play cartridge. These assemblies replace both the old and new series "A." Once installed, you can replace one point at a time.

DIAMOND SAPPHIRE. Replaces old RPJ-013 and new RPJ-013A. Avg. wt., 2 oz. Net 2.59

PS-46—list 31.00

DUAL DIAMOND. Replaces old GE RPJ-012 and new RPJ-012A. Net 7.95

PS-79—list 49.95

DUAL SAPPHIRE. Replaces old GE RPJ-010 and new RPJ-019A. Net 2.10

PS-545—list 5.95

### STYLI FOR OLD TYPE GE CARTRIDGES (FIG. 32)

Exact replacement for all old type single needle GE cartridges. Avg. wt., 2 oz.

PS-45—Diamond 1 mil (LP) replaces GE RPJ-004 Net 2.59

PS-541—Sapphire 1 mil (LP) replaces GE RPJ-005 Net .99

PS-540—Sapphire 3 mil (78) replaces GE RPJ-001 Net .99

### FOR GE SERIES A CARTRIDGES (FIG. 34)

Individual styli replacements that clip in to all GE "A" series. Avg. wt., 2 oz.

PS-47—Diamond 1 mil (LP) replaces GE RPJ-01D Net 2.59

PS-543—Sapphire 1 mil (LP) replaces GE RPJ-01S Net 1.15

PS-542—Sapphire 3 mil (78) replaces GE RPJ-03S Net 1.15

### DIAMOND STYLI FOR G.E. AS LOW AS 2.59



### LAFAYETTE HIGH FIDELITY STEREO-MONAUROUS TEST RECORD

- TESTS RUMBLE EACH CHANNEL
- TESTS LEVEL EACH CHANNEL
- TESTS BALANCE
- TESTS EQUALIZATION
- STYLUS WEAR TEST
- TESTS RESONANCE
- INCORPORATES PHASE CHECK

adjusting check to simplify phasing of speakers. For monaural testing it provides an RIAA equalization test in 9 steps from 30 to 15,000 cycles, a continuous glide band from 10 to 35,000 cycles, to test for resonances of tone arm or of cabinet. The periodic use of this record to check on your equipment performance will easily pay off by catching any costly deficiencies or by diagnosing faults and errors. Also features sections of stereo sound effects of jet planes, boat whistles, etc. A terrific value and a "must" for the Hi-Fi enthusiast. Comes with complete instructions for use. Shpg. wt., 1 lb. Net 2.95

A Lafayette exclusive to help you check both stereo and monaural systems. For stereo testing this two-sided 12" LP stereo record has on its stereo side two 1000 cycle bands to check the level of each channel separately; balance check to set the level of each channel using special metronome recording; rumble test. There are stylus wear test grooves on both outer and inner edges of each side to check both stereo and monaural styli. Incorporates phase



### A LAFAYETTE SPECIAL! TONE ARM CONTROL

1.95

An absolutely essential addition for every Hi-Fi enthusiast. Ends groove and stylus damage caused by accidental dropping of tone arm onto record, greatly extending record life. Accurately and smoothly lowers tone arm into run-in groove and lifts arm off record at end of play. Ideal for "cueing." Designed to fit practically every known turntable arm as well as record changer with manual features. Supplied with adhesive mounting base to keep unit in position and with both wood and metal mounting screws for permanent installation. Shpg. wt., 6 oz. Net 1.95

### 4 SPEED PHONO MOTOR WITH TURNTABLE

Quiet, dependable A-C operation assured by rubber shock-mounted friction drive motor. Speed change control through idler driving an 8" turntable. Mounting centers 4 1/2 x 3 3/4", 2 1/4" depth below base plate. Shpg. wt., 3 1/2 lbs. ML-24 Phono and turntable Net 5.35

5.35



### STATI-CLEAN .88




Sprays a fine mist which keeps your record clear of surface noise created by static (common to all vinyl records) and clean of dust attracted by the static charge. Prevents groove and needle wear caused by static-dust and keeps records lustrous. Extends their life. Two applications a year is sufficient. Enough for hundreds of records. Shpg. wt., 8 oz. Net .88


### LAFAYETTE RECORD CLEANING KIT

Clean your valuable records the professional way with this Lafayette Kit. Contains a non-gumming anti-static detergent in polyethylene bottle. Squeeze to apply for complete elimination of static in the record grooves. Supplied with special velvet applicator in plastic pouch. Shpg. wt., 10 oz. Net 1.29

### SPECIAL SALE 1.29



### PHONO AMPLIFIERS

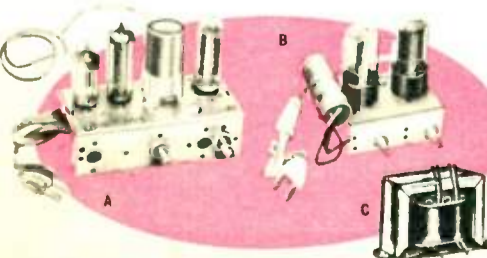

### THREE TUBE AC-DC PHONO AMPLIFIER

(Fig. A) Equipped with a variable tone control and a separate volume control. Delivers two watts output. Phonograph motor connects to the amplifier. Uses 12AV6, 50C5, and 35W4 rectifier. For 110-120V, 60 cycles AC or 110-120V DC. Supplied with line cord and plug, but less tubes. Shpg. wt., 2 lbs. Net 2.95

### 2 TUBE AMPLIFIER WITH TUBES

(Fig. B) A two tube phono amplifier using a 50L6 and 35Z5 tube as rectifier. Well-built, good tone and volume. Contains volume control with switch. AT A BIG SAVING! Shpg. wt., 3 lbs. Net 4.50

(Fig. C) Output transformer matches output tube to 3-4 ohm voice coil. Shpg. wt., 1/2 lb. ea. .49

In lots of 5, ea. .45

### NEW! EXCLUSIVE LAFAYETTE STYLOCHRON



- PROTECT YOUR PRECIOUS RECORDINGS.
- NO MORE GUESS WORK KEEPS AN ACCURATE RECORD OF NEEDLE USE.

More precious recordings are ruined by tardy replacement of the needle than by any other cause. Now, there is no need to let this happen, especially to your doubly precious stereo recordings. Lafayette Stylochron lets you know just how long your needle has been in use so that you can replace the worn needle at the proper time, before it can do damage to your records. The Stylochron is quickly and easily mounted on your motor board or other convenient place. The moment your record changer or turntable starts, the Stylochron begins to register. It stops when the turntable stops. The 1000 hour dial will tell you at any time how long you have been using the needle. Dial is marked off in 50 hour units. You can remove your stylus for inspection at any predetermined number of hours. Diameter of the face plate is 2 1/4". Extends 1 1/4" below or behind panel. Complete with instructions. Shpg. wt., 2 lbs. Net 4.95

### ELECTROSONIC LAB "DUST BUG"



Automatically removes dirt and dust on each playing. Light plastic arm mounts by suction cup. Can be permanently mounted by rubber cement. The bottle of anti-static cleaning fluid has a built-in wick for application to a brush and pad at the end of arm. Shpg. wt., 6 oz. PK-156 Standard model (A) Net 5.63

ESL CHANGER DUST BUG (B). The tuft and pad assembly clips onto arm of changer. Performs the same as the standard model. Shpg. wt., 4 oz. Net 4.65

DISPENSER OF ACTIVATING FLUID. For Dust Bugs. Net 1.22

PK-247 Net .78

PK-173 Replacement plush pad Net .78

PK-174 Replacement nylon brush Net .98

### LAFAYETTE SPECIAL VALUE



STYLUS PRESSURE GAUGE 99c

With the advent of stereo records, correct stylus pressure becomes all important in obtaining the best reproduction and least stylus and record wear. Lafayette's stylus pressure gauge is an accurate device that allows you to read with the pickup in normal playing position. Range, 0-30 gm. No spring and minimum moving parts. Shpg. wt., 1 lb. Net .99

NO MONEY DOWN! SEE PAGE 54



# NEW! LAFAYETTE 15 WATT MUSIC AMPLIFIER




An Outstanding Value at

**59.95**  
5.00 Down

With Built-in Tremolo

- Wide-Swing Tremolo and Outstanding Audio
- 12" Heavy-Duty Concert Speaker
- 7 Tube Performance — 5 Tubes (2 Dual Purpose)
- 3 Input Jacks — Accordion, Guitar, Instrument
- Full 15-Watt Output



A 15-watt music amplifier of unsurpassed value offering outstanding performance at an exceptionally low price. It adds fine tone quality and wide sound range with a tremolo that regulates from extremely fast to a slow wobble. Top-mounted control panel includes: On-Off Control, Tremolo, Combination Tone/Bass, Volume; 3 separate Accordion, Guitar and Instrument output jacks; pilot light. Features foot control jack for foot control switch operation of tremolo. Smart, new slant grille. Tube complement: 1-12AX7, 1-12AU7, 2-7189, 1-6CA4. Overall: 19"W, 10 1/4"D, 14 1/2"H. Shpg. wt., 25 lbs. Net 59.95  
PA-273WX 5.00 Down  
PA-101 Accordion Microphone. Shpg. wt., 2 lbs. Net 5.95  
PA-38 Guitar Microphone. Shpg. wt., 2 1/2 lbs. Net 7.95


## NOW FROM LAFAYETTE ADD-ON REVERBERATION

CONVERTS YOUR LIVING ROOM SOUND TO THAT OF CONCERT HALL GRANDEUR

Works With  
Phono, TV

Radio or Tape Recorder

- Marvelous For Existing Monaural Systems
- Enriches Your Present Stereo Systems
- Adds A Delightful Dimension to Sound Without Effecting Fidelity
- Completely Self-Contained. Has Own Amplifier and Speaker



**69.95**

Changes the acoustic dimensions of your room. A self-contained reverberation speaker-and-amplifier with its own internal power supply, that hooks into any existing stereo or monophone component sound system, FM and AM radio, Tape Recorder, T.V. set, or Electric Organ. More than just a simple "echo device," the "Reverb-Control" takes part of the original signal from a speaker system and feeds this signal through a carefully tuned device which delays the sound for 1/30th of a second. This delayed sound blends with the original sound to add acoustic dimension to your

room. Uses 8" Dual diameter speaker. Power output of amplifier 3 watts RMS (will work excellently with systems having up to 60 watt amplifiers). 2 sets of inputs—high level and low level (left and right)—use only one input for monaural. Comes supplied with 2 cables, 15' each with standard phono plugs on one end. Power requirement 110V to 120V AC. Cabinet size 10x20x10 1/4" deep. Available in walnut and mahogany. Shpg. wt., 22 lbs.  
SK-204WX Walnut Finish 5.00 Down Net 69.95  
SK-205WX Mahogany Finish 5.00 Down Net 69.95

## SENSATIONAL SPEAKER SYSTEM SALE!

JENSEN speakers + UNIVERSAL WOODCRAFTERS cabinets + LAFAYETTE, low prices = THE SPEAKER SYSTEM BUY OF THE YEAR.

LIST  
59.50



**SALE! 38.95**

- Heavy 7-Ply Furniture Veneer Cabinet
- Jensen 12" Woofer, 8" Midrange Driver, 3 1/2" Enclosed Tweeter
- Fiberglass-loaded Cabinet for Better Bass Response

Now you can get unparalleled speaker performance at a low, low Lafayette price — the most outstanding value of its kind in the industry. The Uni-Voice hi-fi speaker system is a thrilling blend of fully integrated, unified 3-speaker systems engineered by Jensen with specially developed Jensen components, with cabinetry by Universal Woodcrafters. Contains special 12" woofer, 8" midrange driver independently pneumatically damped in its own hermetically enclosed acoustic surroundings, completely separated from woofer cavity; 3 1/2" fully enclosed, independently baffled tweeter. Woofer electric crossover at 600 cycles, midrange electric crossover at 2000 cycles. Impedance 8 ohms. Response: 35-18,000 cycles.

MODEL UV-30 Bookshelf enclosure finished on 4 sides. Speaker grille completely framed with brass inlay. 24Wx14 1/4x13"D. Shpg. wt., 32 lbs. Net 38.95  
SK-185WX Walnut finish 2.00 Down  
SK-186WX Mahogany finish 2.00 Down Net 38.95

**TELECHRON  
TIMER SWITCH**  
Turn on any Appliance  
up to 1650 watts.  
**3.95**

Genuine Telechron mechanism. Complete 24 hour movement. Can be set to turn on any radio, TV or similar electrical appliance at any preset time. Gold finish dial—black lettering. Timer sets from rear. On-off-auto switch in front. Size 3 1/2" square, 1 3/4" deep. Set shaft extends 5 1/2" to rear. SPST switch, rated 15 amps at 115 volts. For 110-120V, 60 cy. AC only. Shpg. wt., 2 lbs. MS-793 Net 3.95

**TELECHRON TIMER SWITCH**  
• Radio—TV—Appliance Timer  
• 60 Minute Sleep Switch  
• Simple Installation  
• Rated to Handle 1650 watt load  
• Efficient Accurate Time Control  
**5.40**

Automatically turns on radios—TV sets—tape recorders—ham rigs—electrical appliances—at any preset time in a 12 hour period. "Sleep-Switch" allows up to 60 minutes of continuous run prior to "shut-off." Built in alarm for added convenience of "signaling." As easy to set as any electric clock. All controls on front. On-off-auto, 0 to 60 sleep switch, alarm set and time set. Gold finish dial—black lettering. 3 1/2" square bezel. 1 3/4" deep. SPST rated 15 amps at 115 volts, 1650 watt load capacity. For 110-120V, 60 cy. AC only. Shpg. wt., 2 lbs. MS-794 Net 5.40

9024

78174

### TIME SWITCHES FOR WALL BOX INSTALLATION

A dependable and versatile time switch to automatically turn off attic fans, porch and garage lights, window lights, heating units, etc. at any preset time. Has special HOLD feature: turn of a knob cuts out timing mechanism and allows unit to be used as a regular toggle switch. Capacity 20 amps, 125 volts AC. Satin-chrome dial 4 1/2"x3 1/2" W. switch 2 1/2"x1 3/4"x1 1/4" D. Fits any standard rectangular wall box. Shpg. wt., 3 lbs.

MODEL 9024—time range up to 1 hour Net 5.63  
MS-135  
MODEL 9015—time range up to 12 hours. Shpg. wt., 3 lbs. Net 5.60  
MS-136

**MODEL 78174 PHOTOGRAPHIC  
TIME SWITCH**  
• UP TO 60 SECONDS AUTOMATIC CONTROL  
• FOR AMATEUR AND PROFESSIONAL USE  
It's easy to control accurate timing on photographic developers, enlargers, and photo copy equipment by plugging them into the convenience outlet on this inexpensive unit. Adjustable stop makes repeated settings—even in total darkness—easy and foolproof. Times up to 60 seconds, then automatically shuts off current. May also be used as "on-off" switch when timing is unnecessary. Rated 10 amps—125 volts—A.C. UL and CSA Inspected. Shpg. wt., 3 lbs. MS-714 Net 6.72

2130

2090

### MODEL 2130 PORTABLE 2-SPEED PRECISION TIMER

• TWO TIMERS FOR THE PRICE OF ONE!  
• FOR PRECISE 1 SECOND TO 1 HOUR TIMING IN THE HOME, OFFICE AND LABORATORY  
Indispensable for timing precise, short operations such as boiling eggs, pressure cooking, heat and sun lamp treatment, home permanent, photo developing and printing, long distance calls, etc. Times up to 6 minutes in seconds and up to 1 hour in minutes. Exclusive 2-speed feature permits instant timing speed change by flick of a lever. A clear, resonant bell sounds at end of timing period. Can be attached to any surface with handy wall bracket supplied or can stand upright. Smartly styled in white with dial face a rich copper tone. 4x2 1/2" Shpg. wt., 2 lbs. MS-294 Net 4.68


**MODEL 2090 UTILITY HOUSEHOLD  
TIMER**  
• DEPENDABLE 1 MINUTE TO 1 HOUR TIMING  
This reliable, low-priced timer in a neat durable white plastic case has innumerable household timing uses, i.e., cooking, baking, home permanents, games, remembering appointments, TV and radio programs, etc. Attractive modern design. Times any interval up to one hour accurately and gives resonant bell signal at end of period. Large easy to set and easy to read dial. 3 1/2"x3x1 1/2" Shpg. wt., 1 1/4 lbs. MS-295 Net 2.95

## LAFAYETTE SPECIAL

**AUTOMATIC TIMER  
MECHANISM that  
does EVERYTHING**  
**5.95**

• Handles 1650 Watts  
• Turns Appliances On Or Off • Never Needs To Be Reset  
• Operates From 30 Minute To 23 Hr. Cycle  
Makes practically everything electrical completely automatic. Will handle load up to 1650 watts. Turns radio on and off — does not have to be reset each night. Defrosts refrigerator — turns lights on and off — controls roaster, electric blanket, washing machine, coffee makers, vaporizers, etc. 30 min. minimum on time — 23 hours maximum. As easy to set as an electric clock. Easy to read 24 hour "day and night" dial. Operates day after day without attention. Can be controlled manually without automatic reset. For 110 volt 60 cycle AC only. Instructions included. Easily built into any case. 3 1/2"x4 1/4"x2 1/2" D. Shpg. wt., 2 lbs. MS-810 Net 5.95

## NEW! LAFAYETTE "THIN-LINE" CEILING & WALL BAFFLE SPEAKER

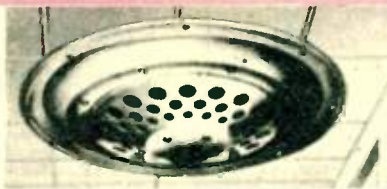


Frankly we were amazed at the phenomenal musical quality of this speaker. Never before have we heard a speaker of this size reproduce the true sounds of loud orchestral passages, drums, etc. with such definition and clarity. The perfect speaker to furnish music or paging throughout your home, office or factory. Advanced design employs an inverted magnet, placing the 12 oz. magnetic structure in front of the speaker rather than behind as in conventional speakers. Only 2 1/4" deep with its own metal baffle plate, the SK-175 easily mounts in any wall, ceiling, closet or ordinary wood enclosure. Two are perfect for stereo. Voice coil is 1" Diam. Frequency Response: 90-9,000 cps. Impedance: 8 ohms. Overall Dimensions including metal baffle is 9 1/2". Requires 6 3/8" wall cutout. Shpg. wt., 3 lbs. SK-175 Net 5.95

- Measures Only 2 1/4" Deep
- Employs New Inverted Magnet
- Perfect for Extension Speaker or P.A. Use
- Excellent for Sheltered Patio

**5.95**

## NEW! Lafayette Transistor 2-STATION INTERCOM



**21.95**  
2.00 Down

- 3 Transistors, 1 Thermistor
- Operates on Single 9-Volt Battery
- No Warm-up Time Needed

A completely portable intercom system that does not require any house current—simply connect the 2-conductor wire supplied. Master station has volume control and function switch with 3 positions: "Off" (conserves battery when set is not in use); "Hear"; "Speak" Remote has "Hear-Speak" position—ideal for listening to baby, silk room, etc. Depress for "Call" position to alert the Master station even if Master is in "Off" position. 3 1/2" dynamic speaker. Housed in sturdy metal cases. Rubber tips protect furniture. Operates on 9V battery (supplied). Each station about 2 3/4"x4 1/4"x4 1/4" D. Shpg. wt., 4 lbs. PA-119 2.00 Down Net 21.95  
BA 2 Replacement Battery for above Net .49

## ai FOURJAY The Patio Pair For Outdoor Listening



The Patio Pair consists of a separate loudspeaker baffle with weatherproof speaker, and an attractive patio lamp. Identical in styling in green and white fiberglass with pipe fitting for 1" pipe. Speaker provides even dispersion of sound. Lamp accommodates up to 100-watt bulb.  
Model S-DF1 8 WG Speaker Baffle. Includes 10-watt, 8" weatherproof speaker with 40-11,000 cycle range, 8-ohm voice coil. Shipping weight 6 lbs. PE160 Net 17.05  
Model LMP 60/100 WG Lamp. Includes weatherproof ceramic socket, less bulb. Shipping weight 4 lbs. PE161 Net 10.05

PRICED EXTRA LOW!  
**COMPARE**  
FOR VALUE

**ANTENNAS and "U-INSTALL-IT" KITS!**  
ONE PACKAGE DOES IT  
— FROM ROOF TO RECEIVER

## FULL 20 ELEMENT STACKED Snap Open Conical

- ALL ALUMINUM • NO LOOSE PARTS
- FASTEST INSTALLATIONS

**COMPARE! ELEMENT FOR ELEMENT PRICE FOR PRICE**

**\$5.25** each singly  
**4.95** each in lots of 3

Best antenna deal yet for servicemen-dealer-and installation specialists. All the most wanted features. Quickest-easiest installation possible. No loose hardware. All elements snap open and lock in without tools. Most efficient conical design for all reception areas. Two complete bays with Q bars, less mast. Shpg. wt., 8 lbs.

AN-28WX—Singly, ea. 5.25  
Lots of 3, ea. 4.95

"U-INSTALL-IT" KIT With All Angle Roof Mounts. Includes AN-28 antenna and installation kit AM-11 with two 5 ft. masts. Net 7.95  
AN-32WX—Shpg. wt., 18 lbs. Net 7.95

"U-INSTALL-IT" KIT With Chimney Mount. Same antenna and accessories but includes chimney mount instead of roof mount. Net 8.75  
AN-43WX—Shpg. wt., 18 lbs. Net 8.75

## SPECIAL CONICAL and V-BEAMS

**2.60**

All aluminum 8 element conical. Full sized. Rugged insulator block. Designed for rapid assembly. Fan front of 6 full length elements. Real value. Shpg. wt., 4 lbs.  
AN-11W Singly ea. Net 2.60  
Lots of 3 ea. Net 2.40

"U Install It" Kit. Includes AN-11 and roof-mount kit as shown with one 5 ft. mast. Shpg. wt., 11 lbs. Net 4.95  
AN-33W Net 4.95

"U Install It" Kit. With chimney mount instead of roof mount. Shpg. wt., 11 lbs. Net 5.50  
AN-44W Net 5.50

Popular primary area antenna. Rugged aluminum construction. Light weight easy to install. Sharply directional. Shpg. wt., 4 lbs.  
AN-21W Net 2.29  
AN-20W 2 bays stacked Net 4.59  
"U Install It" Kit. Includes AN-21W and roof mount kit, with one 5 ft. mast. Shpg. wt., 11 lbs. Net 4.70  
AN-45W Net 4.70  
"U Install It" Kit. With chimney mount instead of roof mount. Shpg. wt., 11 lbs. Net 5.29  
AN-46W Net 5.29

**Servicemens Special VEEBEAM SALE**  
ONLY 1.68 each in lots of 6. Shpg. wt., 15 lbs. per kg of 6  
AN-21W Lots of 6. Net ea. 1.68

## FAMOUS BRAND COLOR 'TENNA

### GOLD ANODIZED

- ELECTRONIC LENS DESIGN
- HIGHLY DIRECTIONAL—YAGI PERFORMANCE
- HIGH GAIN ON ALL VHF CHANNELS
- COMPLETELY FACTORY PREASSEMBLED

Lafayette is the FIRST to offer this nationally tried and proven antenna at more than 25% off the regular dealer price. This is the same fine antenna—with all its exclusive features—that sells for dollars more than our record-breaking price. Check these features: Electronic Focussing—High Gain—all VHF channel coverage—amodized quality construction—easiest installation—outstanding fringe area reception—compact design dynamically balanced. All-aluminum construction—automatic hardware. Shpg. wt., 8 lbs.

AN-51WX Net 13.95  
Net ea. in lots of 3, 13.25

Complete Kit of AN-51 antenna plus AM-12 mtg. kit as shown. Shpg. wt., 15 lbs. Net 16.30  
AN-52WX Net 16.30

**13.95**

GOLD ANODIZED

## NEW! Maximum Performance Fringe Antenna

**SALE 11.88**

- 21 Active Elements
- Snap Open Design
- Fiberglass Insulators
- Compound Yagi Array

Range to 125 Miles

Field proven design for fringe reception. Gold anodized to combat corrosion. Exclusive features engineered to make this antenna a national favorite for "hard problem" areas. Compound yagi array to "sock-in" signals where other designs fail. Gold anodized aluminum construction. Fiberglass insulators—channeled for rigidity. Closed boom ends. Dowel reinforced at U Bolt. "Tension-lok" hardware. Aluminum phasing network. Heavy wall tubing throughout. Less mast Shpg. wt., 8 1/2 lbs. Net 11.88  
AN-67WX Gold Anodized Net 11.88

AK-38WX. Includes AN67WX antenna, 20 ft. telescoping mast and accessories. Ready for installation. Shpg. wt., 39 lbs. Net 22.50  
AK-38WX Net 22.50

AK-39WX. Includes AN-67WX Antenna, Alliance K-22 rotator, 20 ft. telescoping mast and accessories. Shpg. wt., 50 lbs. Net 45.79  
AK-39WX Net 45.79

GOLD ANODIZED

## FAMOUS BRAND SUPER COLOR 'TENNA

20 ELEMENTS — UP TO 125 MILES

**16.98**

- ELECTRONIC LENS DESIGN
- HIGHLY DIRECTIONAL—YAGI ENGINEERED
- COMPLETELY PREASSEMBLED
- MORE GAIN ON ALL VHF CHANNELS

Well known, field proven, deep fringe antenna—at dollars below the regular dealer price. All the exclusive features that have made this antenna a national favorite for "problem area" reception. Electronic focussing—20 elements for more gain—quality construction—1" square crossarm—1" round driven elements—1" tubing boom brace—easy installation—automatic hardware—all aluminum construction. Dynamically balanced design—outstanding fringe area performance. Shpg. wt., 10 lbs. Net 16.98  
AN-63WX Net 16.98

Kit AK-34. Includes AN-63WX SUPER color 'tenna; 20 ft. telescoping mast and accessories. Shpg. wt., 30 lbs. Net 25.95  
AK-34WX 2.00 Down Net 25.95

Kit AK-35. As above, including Alliance K-22 rotator and additional accessories. Shpg. wt., 52 lbs. Net 51.40  
AK-35WX 5.00 Down Net 51.40

## ALL CHANNEL'S "RIVIERA"

MOST POWERFUL ULTRA-FRINGER VHF—UHF—FM ANTENNA

GUARANTEED 200 MILE VHF RECEPTION OR YOUR MONEY BACK

**SPECIAL UNTIL SEPT. 15th 17.85**

- Receives channel 2-83 from all directions without a rotator
- Broadband UHF-VHF and FM, motorless all direction reception
- All aluminum flip-out assembly

Field tests reception on VHF of up to 200 miles has made possible this unprecedented guarantee. Here is an antenna with one transmission line for all UHF, VHF and FM stations in all directions without the use of a rotator. The nine position selector switch connected at the set electronically rotates antenna beam instantly without physically moving the antenna. Gain on channels 2-6 comparable to 4-bay conicals; on channels 7-13 comparable to stacked 10-element single channel yagis; on 14-83 comparable to bow-tie reflector. 1 1/2" doweled aluminum elements are 60 inches long. Complete with switch, coupler, 45" stacking bars and 27 1/2" angle type mast insulators for Polymicalene line listed below. Shpg. wt., 10 lbs. Net 17.85  
AN-135WX Less Mast Net 17.85

THE RIVIERA MUST BE USED WITH THE LOW LOSS LEAD IN WIRE LISTED BELOW

"U-Install-It" kit. Includes Riviera antenna, chimney mount, two five ft. masts, 100 ft. of Polymicalene 4 conductor lead-on wire, 8 stand off insulators and complete instructions. Shpg. wt. 16 lbs. Net 27.32  
AN-42WX 2.00 Down Net 27.32

ALL CHANNEL LEAD-IN WIRE FOR USE WITH RIVIERA ANTENNA  
Special 4 conductors, matched impedance transmission line. Low loss, mica-filled Polymicalene copperweld conductors.

WR-8W 50 ft. length Net 5.00  
WR-9W 75 ft. length Net 7.50  
WR-18W 100 ft. length Net 8.90  
over 100 ft., per 100 ft. Net 8.90

ALL CHANNEL COMPONENT PARTS

TS-229 9 Position Switch Net 5.93 Ea.  
TS-230 Switch to Set Coupler Net .62 Ea.  
TS-231 Stocking Harness Net 2.87 Ea.

## REMBRANDT TV DIRECTION FINDER

- Receives Signals From ALL Directions—Without a Rotator!
- Supercharges Any TV Antenna—Boosts The Pick-Up Power!
- Filters Out Interference—Tunes Out Ghosts!
- Rejuvenates "Old" TV Antennas
- Amplifies The TV Signal
- No Installation Problem

**5.95**

The latest television invention! Seeks out—and beams in—TV signals from any channel, in any direction, without a mechanical rotator. Electrically rotates the polar-receiving pattern of your existing antenna and phases the ground wave picked up by the electrical wiring system with the sky wave picked up by the antenna. Improves any existing antenna: indoor, outdoor, master or built-in. Boosts pick-up power of any antenna—old or new. Just a flick of the selector control tunes out ghosts—filters out interference—tunes in those "hard-to-get" problem channels. Automatically amplifies TV signal strength for "snow" free, brighter, clearer pictures. Works on every channel—in any location—with any antenna—for any TV set. No installation problem—simply attach to antenna terminals in back of TV set—and plug into 110V AC/DC socket. Complete satisfaction guaranteed or your money back. Shpg. wt., 2 lbs. Net, ea. 5.95  
AN-140 In lots of 6 ea. 5.00

## "U-INSTALL-IT" KITS!

All the items for simple installation. You get an all angle roof mount—lightning arrester—75 feet of 300 ohm twin lead—screw eyes—mast standoffs and 5 ft., 1 1/4" O.D. steel mast. Shpg. wt., 7 lbs. Net 2.85  
AM-10W ea. 2.95 Lots of 3, ea. 2.85

AM-11W with 2-5 ft. masts. Shpg. wt., 10 lbs. Net 3.55  
Singly, 3.55 Lots of 3, ea. 3.35

AM-12W Same as AM-10W and chimney mount. Net 3.15  
Ea. 3.25 Lots of 3, ea. 3.15

AM-13W Same as AM-11W with chimney mount. Net 3.75  
Ea. 3.85 Lots of 3, ea. 3.75

AM-14W Same as AM-10W with aluminum wall bracket. Net 2.95  
Ea. 2.95 Lots of 3, ea. 2.85

AM-15W Same as AM-11 with aluminum wall bracket. Net 3.55  
Ea. 3.55 Lots of 3, ea. 3.35

## AMPHENOL

**2.59**

### INDOOR TV ANTENNA WITH TRUE "VIDEO FIDELITY"

Designed for True video fidelity—featuring "slide rule" tuning with inductive reactance network for fine picture adjustment and transformer coupling for strict impedance matching. Elements fold from sight when not in use. Shpg. wt., 2 lbs. Net 2.59  
AN-65 Indoor TV Antenna Net 2.59

## SPECIAL UHF ANTENNA

- Highest Gain on 70 UHF Channels
- Completely Preassembled
- Excellent Directivity
- Flat Response Across Each Channel

**4.79**

Four bay, UHF bowtie antenna. Exceptionally high (12db) gain—relatively flat across the entire spectrum. Fully factory assembled. Quickest and easiest to install. High efficiency screen grid reflector boosts front to back ratio. Unique "cross-over" phasing bars—open V elements. Rugged—rigid—corrosion resistant construction. Shpg. wt., 5 lbs. Net 4.79  
AN-200WX Net 4.79

UHF "Translator" 4 Bay Antenna: Same as above, except cut for translator frequencies. Shpg. wt., 5 lbs. Net 4.79  
AN-201WX Net 4.79

## FM FRINGE AREA ANTENNA

**5.95**

- BUILT FOR RUGGED USE
- AUTOMATIC SNAP LOCK BRACKETS
- ENGINEERED FOR HIGH GAIN
- DESIGNED EXPRESSLY FOR FM


Provides excellent gain for areas up to 35 miles from the station. Use on existing masts new installation—or as an attic installation. Gold anodized aluminum for years of trouble free operation. Exceptionally light—sturdy design. Capable of receiving FM signals from practically all directions with equal efficiency. Complete with 50 ft. of 300 ohm twin lead, mast standoff, screw eye standoffs, mast mount Shpg. wt., 5 lbs. Net 3.98  
AK-53 Net 3.98

FM ANTENNA ONLY. Shpg. wt., 3 lbs. Net 2.85  
AN-66 Net 2.85

No FM or High Fidelity outfit is complete without this high gain antenna which was designed for the audiophile who seeks perfection in FM reception. Extra elements on this antenna serve to pull in stations where others fail. Features a new super strength construction and double grip on all elements which assures many years of trouble free operation even under severe weather conditions. The fully automatic snap-lock brackets insure easy, rapid and secure installation. Shpg. wt., 3 lbs. Net 5.95  
AN-49WX Net 5.95

# TV ACCESSORY SPECIALS!

## NEW! LAFAYETTE 4 SET TV/FM

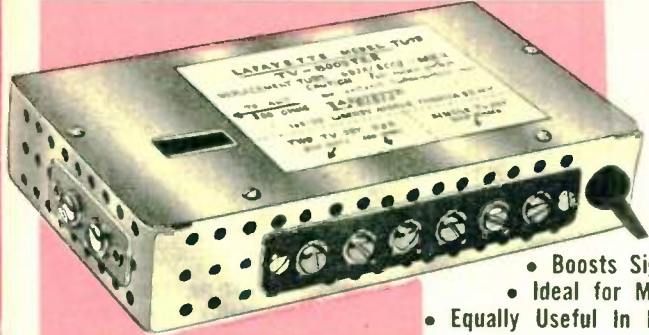

**BOOSTER-COUPLER**  
**9.95**

- Boosts Signal For Up To 4 TV Sets
- Ideal for Master "Home" Installation
- Equally Useful in Primary and Fringe Areas

Provide a stronger TV or FM signal to up to 4 sets anywhere in the home. Low noise-high output amplifier boosts and distributes the signal over ordinary twin lead. Special isolation circuitry prevents interaction and interference between sets. Provides as much as 7 to 10 db gain on all channels 2 through 13 when used with one TV set. From 2.5 to 5 db when used with 2 sets. Will often supply more gain

when used with an indoor antenna than elaborate, unboosted outdoor antenna supply. Requires no tuning. Installs with just a screwdriver. Uses ordinary twin lead to "antenna-matched" terminals. Mounts behind set—or in any convenient location. Measures 5 3/4"x3 3/4"x1 1/4". For 117 V.A.C. 60 cycles. Shpg. wt., 2 lbs.  
TL-75 Net 9.95

## Blonder Tongue "IT-3" TRANSISTORIZED 4-Set TV/FM Booster

**NEW**


- Antenna Matched Input
- Highest Gain—Lowest Noise
- Simple "Stripless" Installation



**19.60**

The highest gain of any home TV booster. Boosts antenna signal up to five times. More power for up to 4 TV or FM sets. The perfect basic unit for a home master TV-FM system. Designed as a rugged, long life unit. Requires almost no maintenance. Draws so little current it need never be turned off—no tubes to replace. Engineered to provide an excellent impedance match and maintain necessary isolation between sets. Can also be used to boost amplification from most mounted boosters or in master systems. Simple "stripless" installation—solid electrical contact with the turn of a screw. Size 6 1/4"x3 3/4"x1 1/2". For 117 volts, 60 cy. A.C., .01 amp. Shpg. wt., 1 lb.  
TL-99 List 32.50 Net 19.60

## ALLIANCE ANTENNA ROTATORS

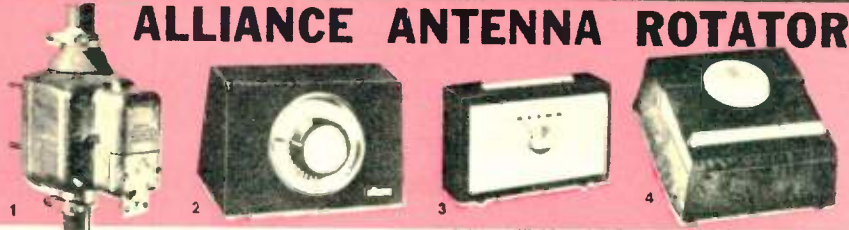

Rotator redesigned and restyled to provide faster, smoother, better efficiency. Rotation speed is 2 R.P.M. and thus has the fastest change from station to station. Magnetic brake affords instantaneous stop without drift. There is full 360° rotation. Factory lubricated for life. Contacts are self wiping thus preventing arcing, loss of contact or interference in pix. A reinforced zinc die cast housing affords all weather protection. Model U-9B (1 & 2)—Fully automatic, just set control knob and antenna rotates to desired position and stops automatically. Indicator shows position of antenna. Has positive mechanical stop at the end of rotation. Size: Rotator 7 1/2"x5 1/2"x8". Control Case 7x4 1/2"x4". 110V. 60 cps AC at 65 watts. Shpg. wt., 12 lbs.  
TL-71W—List Price 44.95 Net 25.77  
T-12 (1 & 3)—Manually operated with direction indicator. Needle indicates position of antenna on control panel. Has clockwise and counterclockwise rotation.

Highly styled decorator case. Size: Rotator 7 1/2"x5 1/2"x8". Control Case 6 1/2"x2 1/2"x4 1/2". Operates on 110V 60 cps AC at 30 watts. Shpg. wt., 12 lbs.  
TL-72W—List Price 34.95 Net 22.12  
Model K-22 (1 & 4)—Economy model—Provides positive instant finger tip control of rotation. Push on on end of bar and antenna turns clockwise. Push down on other end and antenna turns counterclockwise. Center disc automatic signal light indicates when limit of travel in either direction has been reached. Size: Rotator 7 1/2"x5 1/2"x8". Case 5x5x4". Shpg. wt., 12 lbs.  
TL-73W—List Price 24.95 Net 18.08  
TBB THRUST BEARING BRACKET increases stress capacity of Tenna-Rotors up to 300 lbs. Withstands winds up to 90 M.P.H. Prevents buckling and bending. Shpg. wt., 3 lbs.  
TL-74—List Price 4.95 Net 2.91  
WR-24—4 conductor flat cable for above per ft. .03 per C ft. 2.39

## BLONDER-TONGUE UHF CONVERTER



The only converter with 3 section tuner for "Class A" signal areas with these exclusive features. Tuned input tracks with oscillator, rejects spurious signals, suppresses oscillator radiation. Precise impedance match gives maximum signal conversion—no line ghosts—no picture smear. Drift-free performance is achieved by use of a thermally compensated oscillator circuit. One knob tuning; no VHF channel switching; output on channel 4, 5, or 6. Complete with tubes and instructions. Shpg. wt., 4 lbs.  
TL-100—List Price 22.95 Net 15.63

## B-T ULTRAVERTER DELUXE UHF-TV CONVERTER



Adds all UHF channels (primary, satellite, and translator) to standard TV sets. Insures finest pix even in weak areas. Features dual-speed channel selection with direct and fine tuning controls; stable, shielded oscillator. Max. signal transfer to channels 5 or 6 of TV; Precise 300 ohm match and triode amplification; Improved tuner design meets new FCC standards; UL approved; Tunes channels 14-83 (470-890 mc); Tubes: 6AF4A and 6ER5; Power: 117 volts at 60 cps AC, 20 w. Size 6 1/2"x5 1/4"x4 1/4" Shpg. wt., 4 lbs.  
TL-101—List Price 39.95 Net 26.95

## TRI-SET COUPLER



Highly efficient 3 set coupler. For coupling 2 or 3 TV or FM sets to one antenna of any type. No interaction—less than 6 db insertion loss. 40 to 50 db rejection ratio. Shpg. wt., 1 lb.  
TS-332 Net 2.29

## TWO SET COUPLER



Uses one antenna for two sets. Compact electronic set coupler assures performance of two TV sets on one installation. Easy to connect. Nothing to go wrong Shpg. wt., 1 lb.  
TS-326 Each .59 In lots of 6, Each .55

## LO-PASS LINE FILTER



Exceptionally efficient line noise eliminator. Utilizing dual ferrite core coils, heavily wound. Eliminates line noises caused by motors, industrial RF, neons, appliances, etc. Particularly useful on TV and FM sets, radios, tuners, record players. Automatic attenuation of unwanted disturbances. Shpg. wt., 1 1/4 lbs.  
TS-327 Line Filter Net 2.49

## TV-FM HI-PASS FILTER



Hi-pass filter passes all frequencies above 40 mc. Rejects all frequencies below 40 mc. Automatically eliminates electrical disturbances in the antenna circuit. Clears disturbances caused by neon, X-Ray, ignition, appliances, diathermy, short wave, etc. Shpg. wt., 1 lb.  
TS-331 Net 2.39

## TV TUBE 'BRITENER'



Absolutely no tools or soldering needed for installing this handy inexpensive tube rejuvenator. You simply attach two plugs as directed on the instructions. For magnetic tubes and PARALLEL CIRCUITS only. Renews brightness contrast. Wt., 8 oz. Ea.  
MS-12 in lots of 6, each .69 singly .79

## UNIVERSAL 110° CRT REJUVENATOR



A new Universal picture tube brightener designed for application on 110° picture tubes. A single heavy-duty unit which performs four ways. A simple adjustment adapts it for either series or parallel wired filaments and it can be used on electromagnetic or electrostatic focus tubes. Shpg. wt., 1 lb.  
TS-283 For Sylvania Type 110° Tubes Net 2.20  
TS-284 For RCA Type 110° Tubes Net 2.20

## UNIVERSAL TV TUBE 'BRITENER'



Restores brightness to dim TV picture tubes. Operates on all types—magnetic or electrostatic—and in all circuits—parallel or series. Shpg. wt., 10 oz. Ea.  
TS-170 In lots of 6 each 1.29 Singly each 1.39

## TV PICTURE TUBE SHORT ELIMINATOR



Eliminates expensive picture tube repairs. No elaborate equipment needed. Repairs grid and cathode shorts in two minutes—without pulling the chassis! Easy to use—decontaminates cathodes—restores operation of brightness control. Can be used as often as needed. Simple "plug in, switch-on" operation. Works with any TV picture tube. Shpg. wt., 1/2 lb.  
TS-282 Net .99

## TV TUBE RESTORER




One simple unit provides the cure for most ailing picture tubes. Latest model features slide switches—not pin plugs as older units do. Rugged, well made socket—compact, single unit design. Works on electrostatic or electromagnetic focusing tubes, in series or parallel circuits. Includes instructions. Shpg. wt., 1 lb., 4 ozs.  
TS-333 Net 3.23

## TRIO NO STRIP CONNECTOR




No stripping—no exposed wire—no soldering—no broken leads at the set. Your TV set unplugs with ease—in electrical storms—for moving and cleaning—to add accessories. Safe, positive installation. Stronger than the lead in wire. Fast—easy—just insert the lead in—tighten a single knob.  
TS-339 Shpg. wt., 2 oz. Net .59

## UHF-VHF LIGHTNING ARRESTER



Special saw-tooth washers grip transmission line securely without stripping or cutting wire. Designed for flat, tubular, oval or open types. Constructed of low-loss material that assures less capacity and inductance, resulting in less line loading on UHF. With mounting screw and steel strap. U/L approved. Shpg. wt., 10 oz.  
TS-11—Lots of 10 Each .29 Singly .35

## PEAK ROOF MOUNT




A heavy gauge steel peak roof mount. Heavily plated to resist corrosion. Will accommodate mast, up to 2" in diameter. Fully adjustable can be easily rotated. Complete with all necessary hardware. Shpg. wt., 5 lbs.  
TS-41 Net 1.10

## 99¢ ECONOMY MOUNT



Can be erected in minutes, without special tools or drilling. Adjustable, two-section design permits unlimited spacing between brackets for maximum support of masts 1/2" to 1 1/2" O.D. Complete with two 12-ft. lengths of 3/8" galvanized steel bands and hardware. Shpg. wt., 3 lbs.  
TS-82 Net Each .99

## NO RUST BARGAIN MOUNT



The ideal chimney mount for life-long satisfactory service under the most severe conditions. Hot dip galvanized steel "Y" mount. Two 10 ft. stainless steel straps and stainless steel seals. And at Lafayette's bargain prices. Shpg. wt., 4 lbs.  
TS-90 Net Each 1.98 Lots of 3 Each 1.80

## ALL PURPOSE ANCHOR KITS



Permanent—rustproof installations. Anchors of noncorroding Territe Buterate and pulverized aluminum. Ideal for use indoors or outdoors. Hang shelves—blinds—awnings—mirrors—fixtures—fasten key board to walls—signs—pipe straps—Use in concrete—tile—plaster board—brick. Complete kit includes 36 expansion shield anchors and 36 assorted screws, #6 to #10. Shpg. wt., 6 oz.  
TS-341 Net .74  
Heavy Duty Kit: Contains 22 expansion shield anchors and 22 assorted screws, #10 to #14. Shpg. wt., 8 oz.  
TS-342 Net .74

## TELESCOPING TV MASTS

Heavy-duty telescoping masts. Hot-dip zinc galvanizing inside and outside. Designed for easy installation and assembly. Husky thumb bolts lock sections automatically. Precision fitting. 18 gauge .003" wall. Supplied complete with all guy rings, clamps and necessary hardware. Total 5 10-ft. sections for height up to 50 ft.; O.D.: #1 (1 1/4"), #2 (1 1/2"), 50-FT. MAST—Consists of all 5 sections #3 (1 3/4"), #4 (2"), #5 (2 1/4"). Shipping express only. Listed above: Nos. 1, 2, 3, 4 and 5. Height 50 feet. Shpg. wt., 39 lbs.  
TL-63WX Net 13.73  
40-FT. MAST. Consists of 4 sections; Nos. 1, 2, 3 and 4. Height 40 feet. Shpg. wt., 28 lbs.  
TL-62WX Net 10.05  
30-FT. MAST. Consists of 3 sections. Nos. 1, 2 and 3. Height 30 feet. Shpg. wt., 21 lbs.  
TL-61WX Net 7.28  
20-FT. MAST. Consists of 2 sections. Nos. 1 and 2. Height 20 feet. Shpg. wt., 14 lbs.  
TL-60WX Net 4.58

## TV ANTENNA MASTS

STEEL MASTS. New corrosion-resistant 5 ft. steel mast made to fit all antennas. One end is tapered. "Jam Fit" construction with locking key. 1 1/4" O.D.  
TL-12W 5 ft. Wt., 2 1/2 lbs. .69  
TL-13WX 10 ft. Wt., 4 1/2 lbs. 1.29  
TL-14WX 10 ft., 16 gauge. Wt., 8 lbs. 1.89  
ALUMINUM MASTS. 19 gauge-heavy wall-high tensile strength. Rust and corrosion proof. Swaged for stacking.  
TL-66W 5 ft. Wt., 1 1/2 lbs. .89  
TL-17WX 10 ft. Wt., 2 1/2 lbs. 1.69  
10 FT. Mast shipped via express only.

## WUERTH TUBE SAVER



LENGTHENS TUBE LIFE—INCLUDING PICTURE TUBE! PROTECTS T.V.—Hi-Fi—P.A. Any Electronic Equipment Up to 450 Watts!  
New device prolongs life of all electronic tubes including cathode-ray tubes! Protects components and tubes from destructive initial surge currents by "Thermal Cushion Action." Completely automatic. No complicated installation needed, just plug the "Tube Saver" into the wall, and appliances into it. Protects T.V.—Hi Fi Home equipment, etc. RATED: 300 watts, 110-120V AC/DC. Measures only 2 1/2"x1 3/4". Shpg. wt., 8 oz.  
TS-315 (Type 150) Net 2.91  
Same as above except for electronic equipment drawing up to 450 watts. Suitable for color television. Shpg. wt., 8 oz.  
TS-316 Net 3.50

## HEAVY DUTY 300-OHM LINE

Extra high quality. Heavier gauge wire and thicker insulation Shpg. wt., 2 1/2 lbs. per 100 ft.  
WR-26 per ft. Net .025  
WR-152 per 100 Net 1.89

## BROWN 300 OHM TWIN LEAD

1.39 per 100 ft.


## COPPER CONDUCTORS LO-LOSS POLYETHYLENE

High quality, low-loss lead-in for all TV and FM installations. Polyethylene dielectric—standard copper leads. Shpg. wt., 2 lbs. per 100 ft.  
WR-25 100 ft. Net 1.39  
WR-146 500 ft. Net 5.75  
WR-147 1,000 ft. Net 10.95

## CLEAR 300 OHM TWIN LEAD

Same as above but clear for a better blend with the base boards.  
WR-128 100 ft. Net 1.64  
WR-129 500 ft. Net 6.25  
WR-130 1,000 ft. Net 11.95

## FUSIBLE RESISTORS



Replacements for Motorola, Crosley, Emerson, Raytheon, Philco, Hoffman, Mallicrafters, Trutone, Sears, Montgomery Ward, Sentinel, Arvin and many others. Shpg. wt., 5 oz.  
TS-253—Kit of 4. 5.6 Ohms Net .76  
TS-254—Kit of 4. 7.5 Ohms  
TS-255—Kit of 4. 9.0 Ohms  
TS-256—Kit of 4. 22 Ohms  
TS-322—Kit of 4. 4.7 Ohms  
TS-323—Kit of 5 values Net .95

# LAFAYETTE-HEADQUARTERS For BATTERIES and KITS

## LAFAYETTE BATTERIES



BA-1

### AT TREMENDOUS SAVINGS

These popular batteries are for Portable and Transistor radios, R/C equipment, experimenters, labs, and hobbyists, etc.



BA-2

### FRESH STOCK — BRAND NEW GUARANTEED

Here are six of the most popular types used and at

### RIDICULOUSLY LOW PRICES

IN LOTS OF 10 AS LOW AS **.35**

Stock No.	Voltage	Net Each	Lots 10	RCA	Burgess	Eveready	Others
BA-1	67 1/2	1.59	1.49	VS215 VS216 VS218	P45 P45M	477	BL-M145
BA-2	9	.39	.35	VS312 VS323	2U6	216	BL-006F
BA-3	9	.49	.44	VS300A VS314	P6 P6M	226	BL-M106
BA-5	67 1/2	1.29	1.19	VS318	UX45	416	BL-045
BA-6	67 1/2	1.45	1.35	VS016	XX45	467	BL-145
BA-7	9	.59	.53	VS309A	3-177	Mal	TR-177

## "STORAGE CELL" for TRANSISTOR RADIOS!



ONE CHARGEABLE BATTERY OUTLASTS 100 CONVENTIONAL BATTERIES

Only **2.69**

- Replaces 2U6, 216, BL-006P and BA-2
- Fluid Storage Type—Can't Leak Out
- Plays about 15 Hours on One Charging
- Battery Recharges Overnight
- Battery Can Be Used Over and Over Again
- Complete—Battery Plus Charger

The next best thing to a battery that will last a lifetime—this battery can be used for 1100 to 1500 hours of playing time, AND MORE. Its long life is based on 2 new features: 1. A fine storage battery that cannot have fluid leakage; 2. Recharges Overnight—just plug the battery into the charger, the charger into your electrical outlet. Let it charge for 10-12 hours... it cannot burn out on recharge. After charging, the battery is good for about 15 hours of playing time. When the battery runs down, just charge it up and it's ready to play. Will outlast more than 100 conventional batteries. 9V Battery complete with charger. Battery 1 7/8" x 1 1/2"; charger 3 3/8" x 1 1/4" x 7/8". Shpg. wt., 6 oz. F-619 Battery and Charger Net 2.69  
BA-8 Battery Replacement for above Net 1.95

## 4 TRANSISTOR TELEPHONE PICK UP AMPLIFIER KIT




- FOR FAMILY AND BUSINESS GROUP LISTENING

### • HI-GAIN AMPLIFIER FOR PHONO AND MIKE

Lafayette's new Super-Sensitive 4 Transistor Telephone Pick-up Amplifier with class "B" push-pull output for efficient speaker operation. Permits the whole family to enjoy phone conversations. Invaluable on long distance calls, as well as for group listening on business calls and conferences. No need for extension phones! Just place the pickup coil under the telephone cradle base, or in case of metallic base, near phone receiver and you'll marvel at how loudly and clearly the two-way conversation comes through the speaker. Uses transformer coupling for optimum performance. The kit comes complete with all parts including 4 transistors, 3 transistor audio transformers, speaker, volume control, an attractive ripple-finish metallic cabinet a pre-cut metallic chassis that makes mounting and wiring of parts a "snap," wire and solder, less battery and pick-up coil. Includes easy-to-follow illustrated instructions. Size 4 1/2" x 4 1/4" x 4 1/4" D. Shpg. wt., 3 lbs. KT-131A Complete Kit Less Battery & Pickup Coil Net 14.95  
BA-180 Battery 9V. Burgess. 2N6 or eq. wt., 5 oz. Net 1.30  
MS-16 Telephone Pickup Coil. Shpg. wt., 4 oz. Net 1.95

## SELENIUM RECTIFIER SALE!

QUANTITIES LIMITED — UP TO 85% OFF!



RCA — FEDERAL and other Famous Brands ALL RATED 130 VAC	Stock No.	MILS	NET EACH
	SP-210	200	.40
	SP-140	250	.54
	SP-211	300	.65

## ECONOMY ALL-PURPOSE DYNAMIC EARPHONE



Only **79¢**

- FOR TRANSISTOR AND SUBMINIATURE RECEIVERS
- FOR SILENT RADIO AND TV LISTENING

A sensitive all-purpose earphone designed with both your listening pleasure and pocketbook in mind. Extensive range and excellent tone combine, to provide excellent reproduction. Lightweight, equipped with a practically invisible ear support, that slips comfortably over either ear, from which the earphone can't slip out or fall. Ideal for use with TV and radio sets, amplifiers, miniature and transistor receivers, etc. Attractive unit with shiny chrome finish. Complete with a 3 ft. cord. A super value at this price. Shpg. wt., 5 oz. 6 ohm impedance, with subminiature phone plug. MS-591 Net .79

## "B" BATTERY ELIMINATOR and CHARGER for PORTABLE RADIOS

Adjustable Terminals **2.45**



Features adjustable terminals that accept batteries with terminals 7/8" to 1 1/2" apart. Adaptor included permits use with batteries having terminals on 1/2" mtg. centers. Convenient switch for battery eliminator or charger. Replaces all snap terminal 67 1/2 V B batteries. When indoors you can operate set on regular 110V AC without using the battery. Also rejuvenates old batteries for many extra hours of use. Complete with AC cord and plug. Size: 1 7/8" x 2 1/2" x 1". Shpg. wt., 8 oz. F-195 Battery Charger Net 2.45

## "B" BATTERY ELIMINATOR and CHARGER



2.45

Replaces Eveready 416, Burgess UX-45, and RCA VS 318 67 1/2 V B batteries used in Radio Control units and many portables. Just plug in the AC cord and you can save your battery for outdoor use. Also recharges your battery. 110 volts. 3 1/2" x 1 1/2". Shpg. wt., 7 oz. F-550 Net 2.45

## NEW! SUB-MINIATURE PLUG & JACK Provides Extra Earphone Jack for Transistor Radios



pr. **.89**

This new sub-miniature plug and jack set is designed for most transistor radios with earphone jacks. Just plug it in and you have 2 jacks for earphones, speakers, etc.—can be used in most instruments provided with an earphone jack. Overall size: 2 1/4" x 1 1/4" x 3/4" D. Shpg. wt., 6 oz. MS-879 Net pair .89

## REMOTE CONTROL FOR SILENT TV VIEWING



- SIMPLE TO ATTACH TO ANY TV SET OR RADIO
- SEE AND HEAR—NOISELESSLY—CONVENIENTLY
- LOOK AT THESE FEATURES!

- FOR LATE LISTENERS: One or two people can both see and hear the program with the loudspeaker cut off. Tops for enjoying the late-late show without disturbing the rest of the household or the neighbors.
- FOR HARD-OF-HEARING: They can see and hear without turning the set volume so high that others can't stand the noise. They can listen either with the loudspeaker cut off or, if the rest of the family want to hear, with the speaker on.
- FOR NOISY PROGRAMS: Don't let the kids' "Wild Westerns" bother you. Let them view and listen with the speaker off.
- FOR NORMAL OPERATION: Does not affect your regular use of the T.V. set. Does not have to be disconnected from set.
- REMOTE CONTROL: Comes complete with 20 ft. of cable so it can be operated comfortably from a distance. Has its own volume control, speaker on-off switch, and two sets of jacks so either 1 or 2 ear phones can be connected.
- DYNAMIC EAR PHONE: Set is supplied with one of ARGONNE exclusive Hi-Fi dynamic miniature earphone. Highly sensitive and efficient. Phone is complete with 3 ft. cord and tips, ready to insert in control box.
- CONVENIENT: Size only 3 1/2" x 2 1/4" x 1 1/2". Complete with 1 earphone and 20 ft. cable. Completely wired with instructions. Shpg. wt., 3 lbs. MODEL MS-125 Net 6.50

### EXTRA EARPHONE

MS-591 Shpg. wt., 8 oz. Net .79  
10' extension cord for above.  
MS-590 Shpg. wt., 4 oz. Net .39

### PORTABLE A TYPES

Lafayette Stock No.	Eveready No.	Burgess	R.C.A.	Volt-age	Shpg. Wt. Lbs.	Net
BA-100	A100	230	VS336	1 1/2	3/4	\$ .16
BA-101	720	2D	VS069	1 1/2	3/8	.84
BA-102	742	4F	VS004	1 1/2	1 3/8	1.15
BA-103	960P	8R	VS070	1 1/2	3/8	.60
BA-104	964	21R	VS236	1 1/2	3/8	.32
BA-105	726	D3	VS072	4 1/2	5/8	.95
BA-106	736	F3	VS067	4 1/2	1	.95
BA-107	746	G3	VS002	4 1/2	1 1/8	1.05
BA-108	718	2F4	VS010	6	2 1/4	2.73
BA-109	724	Z4	VS068	6	1 1/8	.70
BA-110	744	F4P1	VS009	6	1 3/8	1.16
BA-111	707	D5	VS315	7 1/2	3/4	1.05
BA-112	713	B5	VS129	7 1/2	3/8	1.58
BA-113	717	C5	VS065	7 1/2	1/2	1.15
BA-190	W353	2F	VS141	1 1/2	1 1/4	.77
BA-303	—	37	—	1 1/2	1	.65

### PORTABLE B TYPES

Lafayette Stock No.	Eveready No.	Burgess	R.C.A.	Volt-age	Shpg. Wt. Lbs.	Net
BA-114	411	U10	VS083	15	1 1/2	\$ .81
BA-115	417	K10	—	15	1 1/2	.81
BA-116	504	Y10	—	15	1 1/2	.81
BA-117	412	U15	VS084	22 1/2	1 1/2	1.05
BA-118	420	K15	—	22 1/2	1 1/2	1.23
BA-119	505	Y15	—	22 1/2	1 1/2	1.05
BA-120	413	U20	VS085	30	1 1/2	1.23
BA-121	430	K20	—	30	1 1/2	1.51
BA-122	506	Y20	—	30	1 3/4	1.30
BA-123	507	Y20S	—	30	1 3/4	1.30
BA-124	415	U30	VS086	45	1 1/2	1.75
BA-125	455	XX30	VS055	45	1 1/2	2.08
BA-126	482	M30	VS013	45	1 1/2	3.29
BA-127	484	B30	VS012	45	1 1/2	3.47
BA-128	487	—	—	45	4 1/8	2.76
BA-129	738	Z30	VS015	45	1 1/2	2.07
BA-130	416	UX45	VS318	67 1/2	1 1/2	2.42
BA-131	457	K45	VS082	67 1/2	1 1/2	2.45
BA-132	467	XX45	VS016	67 1/2	1 1/2	2.45
BA-133	477	P45	VS218	67 1/2	1 1/2	2.27

### PORTABLE A-B TYPES

Lafayette Stock No.	Eveready No.	Burgess	R.C.A.	Volt-age	Shpg. Wt. Lbs.	Net
BA-143	729	4T260	VS064	1 1/2, 90	2 1/8	\$4.38
BA-144	759	17GD60	VS022	1 1/2, 90	16 1/4	7.95
BA-146	755	T5250	VS050	6, 7 1/2, 75	3 1/2	5.08
BA-148	753	F6A60	VS019	7 1/2, 9, 90	4 1/2	5.43
BA-149	756	T6Z60	VS057W	7 1/2, 9, 90	4 1/2	4.87
BA-150	727	T6Z60P	VS059	9	2 1/2	5.22
BA-151	752	G6B60	VS047	9	6 1/2	6.48
BA-308	757	F6A60P	VS058	9-90	7	5.57

### MERCURY ENERGIZERS

Lafayette Stock No.	Eveready No.	Mallory	R.C.A.	Volt- age	Shpg. Weight Lbs.	Net
BA-227	E 1	RM-1R	VS143	1.35	0.43	.38
BA-228	E 4	RM-3R	—	1.35	0.93	.54
BA-229	E 9	RM-4R	—	1.35	1.6	.69
BA-230	E 9N	ZM-9	VS313	1.40	1.05	.51
BA-231	E 9N	DM-9N	—	1.40	1.05	.54
BA-232	E 12	RM-12R	VS144	1.35	1.4	.82
BA-233	E 132	TR-132R	VS148	2.70	0.9	.84
BA-234	E 133	TR-133R	VS149	4.05	1.4	1.00
BA-235	E 134	TR-134R	—	5.40	1.9	1.53
BA-236	E 146	TR-146R	VS312	8.40	1.6	1.37
BA-237	E 233	TR-233R	VS400	4.20	1.6	1.80
BA-238	E 400	RM-400R	VS145	1.35	0.04	.25
BA-239	E 401	RM-401R	—	1.35	0.04	.34
BA-240	E 502	RM-502R	—	1.35	1.05	.62
BA-241	E 625	RM-625R	—	1.35	0.14	.30
BA-242	E 630	RM-630R	—	1.35	0.17	.28
BA-243	E 302478	302478-M	—	9.80	9	3.75

### FLASHLIGHT, LANTERN BATTERIES

General Purpose, Portable Lighting

Lafayette Stock No.	Eveready No.	Burgess	R.C.A.	Volt- age	Shpg. Wt. Lbs.	Net
BA-154	912	7	VS074	1 1/2	3/8	.10
BA-155	915	Z	VS034	1 1/2	2 1/2	.095
BA-156	935	1	VS035	1 1/2	3/4	.13
BA-157	950	2	VS036	1 1/2	3/4	.13
BA-158	D-99	—	—	1 1/2	1/2	.16
BA-159	735	4FH	VS106	1 1/2	1 1/2	.84
BA-160	±6 lgn.	6 lgn.	VS06S	1 1/2	2 1/2	.84
BA-161	509	F4H	VS040C	6	1 1/2	.79
BA-162	510S	F4BP	VS040S	6	1 1/2	.79
BA-163	731	TW1	VS317	6	3 1/2	1.83
BA-164	706	4F4H	VS103	6	5 1/2	4.01
BA-166	1462	—	—	9	3 1/2	5.53
BA-169	716	4F6H	VS140	9	3 1/2	5.53
BA-309	W357	N	VS073	1 1/2	1	.08
BA-203	510F	4F2H	VS138	3	3 1/2	1.45
BA-310	510F	F45C	—	6	1 3/4	.79
BA-311	715	4F5H	VS139	7 1/2	8 1/2	4.86

### ELECTRONIC PHOTOFLASH

AND HIGH VOLTAGE TYPES

Lafayette Stock No.	Eveready No.	Burgess	R.C.A.	Volt- age	Shpg. Wt. Lbs.	Net
BA-225	493	U200	VS093	300	3/4	8.37
BA-226	497	U320	—	510	1 1/2	11.16

## LAFAYETTE "B" BATTERY ELIMINATOR and CHARGER for TRANSISTOR RADIOS



2.95

This simple "B" battery and eliminator has provision for replacing snap terminals on all 9-volt transistor batteries. Now when indoors you can operate your portable transistor set on regular 110V AC house current without using up your expensive "B" battery. Best of all you may also recharge your used battery for many extra hours of use. Complete with AC cord and assorted snap terminals to fit all 9-volt transistor batteries. Size: 3 1/2" x 3 3/8" x 2 1/2" D. Shpg. wt., 1 lb. F-481 Net 2.95

## EXTENSION CABLE WITH MINIATURE PHONE PLUG & ADAPTER .39

Perfect for extending earphone from transistor and portable radios. Extension up to 10 feet. Complete with miniature phone plug and



# LAFAYETTE - Leaders in Miniature Parts for TRANSISTOR CIRCUITS



## EXPERIMENTERS

## ENGINEERS

## SERVICEMEN

### LAFAYETTE QUALITY SEMICONDUCTORS AT ECONOMY "PACKAGE" PRICES While They Last!

**10 GERMANIUM DIODES**

Pkg. of 10 germanium diodes that replace 1N34, 1N34A, 1N46, 1N48, 1N51, 1N60, 1N64, 1N64A, 1N87, 1N105, 1N109, 1N147, 1N267, 1N268, 1N295, etc. Shpg. wt., 6 oz.

SP-234

**10 SILICON DIODES**

SP-235

Package of 10 silicon diodes. Replaces 1N34, 1N34A, 1N46, 1N48, 1N51, 1N60, 1N64, 1N87, 1N295, etc. Shpg. wt., 4 oz.

**4 PNP GERMANIUM TRANSISTORS**

SP-236

Package of 4 PNP General Purpose Transistors similar in performance to: 2N107, 2N218, 2N1265, CK722, GT222, TR722, 2N1191, etc. Shpg. wt., 6 ozs.

# .98

per pkg.  
Any 4 Ass't. Pkgs.  
3.29

**2 PNP TRANSISTORS**

SP-237

Mixer/Oscillator Converter - Replaces 2N112, 2N114, 2N135, 2N136, 2N137, 2N140, 2N219, 2N411, 2N412, 2N414B, 2N415, CK760, CK766, 2S52, etc. Shpg. wt., 4 oz.

**2 PNP GERMANIUM TRANSISTORS IF AMPLIFIER**

SP-238

Pkg. of 2 PNP germanium IF amplifier transistors that replace: 2N111, 2N111A, 2N112A, 2N139, 2N218, 2N409, 2N410, 2N413, 2N413A, 2N414, 2N414A, 2N416, GT760, 2S53, etc. Shpg. wt., 4 oz.

**2 PNP GERMANIUM TRANSISTORS AF AMPLIFIERS (Up to 12 Volts)**

SP-239

Pkg. of 2 PNP Germanium AF amplifier transistors that replace: 2N133A, 2N138A, 2N138B, 2N151, 2N186A, 2N187A, 2N215, 2N217, 2N319, 2N320, 2N359, 2N360-363, 2N407, 2N408, 2N1008, A, B, GT81R, GT109, 2S56, 2S838, etc. Shpg. wt., 4 oz.

**2 GOLD PLATED SILICON RECTIFIERS 500 MIL - 400 PIV**

SP-240

Pkg. of 2 miniature size exceptional 24 karat gold plated silicon rectifiers rated at 500 milliamperes, 400 PIV. Shpg. wt., 4 oz.

**2 TOP HAT SILICON RECTIFIERS 750 MIL - 400 PIV**

SP-241

Pkg. of 2 top hat type silicon rectifiers rated at 750 milliamperes, 400 PIV. Shpg. wt., 6 oz.

**STUD MOUNT SILICON RECTIFIER 2 AMPERE 400 PIV**

SP-242

Outstanding Buy! 2 amp. 400 Peak-Inverse-Volts Silicon Rectifier, stud mounting.  $\frac{3}{4}$ " long less lug,  $\frac{3}{16}$ " hex nut. Shpg. wt., 6 oz.

**2-10 WATT POWER TRANSISTORS**

SP-243

Package of 2 PNP 10 Watt germanium power transistors in popular TO-3 case. Similar to 2N155, 2N176, 2N235, 2N351, 2N242, 2N257, 2N268, 2N301A, 2N255, 2N554, 2N555, etc. Shpg. wt., 8 oz.

**40 WATT HIGH POWER TRANSISTOR**

SP-244

Amazing value is this 40-Watt high power PNP germanium transistor! Excellent for experimenter, hobbyist and kit builder for power supplies, auto replacement, audio output, etc. Similar to 2N173, CPT1504, SFT266, etc. Bolt mounted. Shpg. wt., 8 oz.

**LAFAYETTE SPECIAL SILICON POWER RECTIFIERS**

Top hat lead type silicon rectifiers excellent for TV Radio and power supplies as half-wave, full wave rectifiers and voltage doublers.

Type A: 750 Ma, 400 PIV @ 25°C.  
500 Ma, 400 PIV @ 90°C.  
SP-196 Shpg. wt., 4 oz. Net .57  
10 for 5.13; 100 for 47.00

Type B: 750 Ma, 200 PIV @ 25°C.  
500 Ma, 200 PIV @ 90°C.  
SP-197 Shpg. wt., 4 oz. Net .47  
10 for 4.25; 100 for 38.50

**GENERAL PURPOSE DIODES**

**.21**

EXCELLENT DETECTOR FOR TRANSISTOR AND VACUUM TUBE RADIO RECEIVERS

EQUIVALENT TO: 10 for 1.95

1N34 1N34A 1N38A 1N48 1N56 1N69

SP-148 General Purpose Diode Net .21 each 10 for 1.95

**LAFAYETTE PNP AUDIO TRANSISTOR SPECIAL!**

AS LOW AS **.31**

General audio type PNP transistor for experimenters and hobbyists, for code practice oscillators and similar small signal devices. In new JETC 30 welded case. Net, singly, each .39  
SP-146

10 for 3.69 50 for 16.95, 100 for 31.00

**POWER TRANSISTORS**

EACH UNIT TESTED TO MEET SPECIFICATIONS

As Low As **.59**

Similar To: 2N256 2N307 2N554

SP-147 Power Transistor In lots of 100, Each Net 63c Net 59c

**SYLVANIA 2N1265 PNP TRANSISTOR SPECIAL!**

AS LOW AS **.39** ea. LOTS OF 100

**THEY'RE HOT!**

EXCELLENT FOR AUDIO OUTPUT, IF'S AND DRIVERS—MOST ARE VERY GOOD AS OSCILLATORS, MIXERS AND CONVERTERS. SUPRISINGLY UNIFORM IN CHARACTERISTICS AND PERFORMANCE! ALL RATED 10 VOLTS COLLECTOR TO BASE—A REAL BUY!

SP-171 2N1265 Special Net .49  
10 for 4.65; 50 for 22.05; 100 for 39.00

**LAFAYETTE SPECIAL 7-TRANSISTOR SUPERHET PACKAGE**

**3.89**

6 Transistors plus Transistor Diode

- Matched for Superheterodyne Push-Pull Circuit
- Can Work on 9-Volts with Minimum Battery Drain
- Highest Quality - All PNP
- Consists of 1 converter, 2 IF's, 1 driver, 2 push-pull output and 1 transistor diode. Packed in handy plastic case. Shpg. wt., 6 ozs.

SP-202 Net 3.89

**SERVICEMAN'S SPECIAL!**

Exact Replacement

**MINIATURE SPEAKERS for JAPANESE TRANSISTOR PORTABLES**

Fig. "A" Fig. "B" Fig. "C" Fig. "D" Fig. "E"

**1.49**

\* IDEAL BOTH FOR REPLACEMENT AND MINIATURE BUILDERS

\* FROM  $\frac{1}{2}$  TO 3" DIAMETER \* FROM ONLY  $\frac{11}{16}$  TO  $\frac{1}{4}$ " DEEP

Lafayette brings you this selection of fine quality Alnico PM speakers both to solve the problem of replacement in the hundreds of models of Japanese transistor portable sets now requiring service and to provide the experimenter with miniature speakers. SK-65 and SK-66 have mtg. holes on 2" centers; SK-61 on  $1\frac{1}{2}$ " centers. OHMS is Voice coil impedance. Dimensions given are overall.

Stock No.	Shape	Fig.	Diam.	Depth	Ohms	Wt.	Net
SK-61	Square	A	1 1/2"	1 1/4"	10	6 oz.	1.49
SK-189	Round	C	2"	1 1/4"	8	8 oz.	1.49
SK-190	Round	C	2 1/4"	1 1/4"	8	8 oz.	1.49
SK-191	Round	C	2 1/2"	1 1/4"	8	8 oz.	1.49
SK-65	Square	B	2 1/2"	1 1/4"	3-2	8 oz.	1.49
SK-66	Square	B	2 1/2"	1 1/4"	10	8 oz.	1.49
SK-192	Round	D	2 3/4"	1 1/4"	8	8 oz.	1.49
SK-193	Round	E	3"	1 1/4"	8	10 oz.	1.49

**MINIATURE OUTPUT TRANSFORMER**

2000 ohm primary to 8-10 ohm secondary only  $\frac{1}{2}$ " x  $\frac{7}{8}$ " x  $\frac{1}{4}$ ". Weighs only  $\frac{3}{4}$  oz. Suitable for most transistor outputs. Shpg. wt., 3 oz.

TR-93 Net .69

**MINIATURE 2 GANG VARIABLE CONDENSER FOR JAPANESE TRANSISTOR RADIOS**

- Perfect Replacement in Most Sets
- Size: 11/16x 11/16x 3/8" Deep
- Use for Printed Circuit Board

The ideal variable tuning condenser for replacement in practically all of the current miniature Japanese transistor receivers. The unusually small size of this variable permits it to be installed in the most compact radios. Easily mounted on printed circuit boards. Sturdy transparent plastic case protects delicate plates from any possible damage. Rotates through a full 180°. Sturdy solder leads. Trimmer adjustment on rear of case. Shpg. wt., 4 ozs.

MS-840 Net 1.95

**MINIATURE AND SUB-MINIATURE TRANSFORMERS**

IDEAL REPLACEMENTS for JAPANESE 6-TRANSISTOR RADIOS

Slug tuned, printed circuit mounted miniature IF transformers. All have 455 KC intermediate frequency. Each with schematic and pin contacts. Shpg. wt., 6 oz.

- ALL UNITS ONLY  $\frac{3}{8}$ " SQ. AND  $\frac{9}{16}$ " HIGH

**Lafayette MINIATURE TRANSISTOR COIL KIT**

**2.45**

- 2-Gang Variable Condenser, — 1" square,  $\frac{3}{8}$ " deep
- 3 IF's and Osc.:  $\frac{3}{8}$ " square, 1" high
- Ferrite Loop Antenna, 2 3/4" x 2 1/2" x 3/8" thick

A complete kit for building a miniature 6-transistor radio—includes high-Q 455 KC IF transformers and oscillator coil, variable condenser, flat ferrite loop antenna, tuning dial and knob ( $1\frac{1}{2}$ " diam.), schematic diagram. Proper impedances provided for optimum circuit performance. Shpg. wt., 1 lb.

MS-884 Net 2.45

QUANTITY LIMITED - Order Early!

MS-779 Oscillator Coil: Inductance 270uH  
MS-780 1st IF: pri. 70,000 ohms, sec. 1500 ohms  
MS-781 2nd IF: pri. 50,000 ohms, sec. 1000 ohms  
MS-782 3rd IF: pri. 30,000 ohms, sec. 5000 ohms

**NET EACH .59**

**SUB-MINIATURE TRANSFORMERS**

- ALL UNITS ONLY  $\frac{5}{16}$ " SQ. AND  $\frac{7}{16}$ " HIGH

Same as miniature IF transformers above except for size.

MS-775 Oscillator Coil  
MS-776 1st IF  
MS-777 2nd IF  
MS-778 3rd IF

**NET EACH .69**

**PHILCO TYPE AO-1 TRANSISTOR**

**.98**

30 Mc. SURFACE BARRIER TRANSISTOR RF - OSCILLATOR - IF

AO-1 Net .98

**LAFAYETTE EXPERIMENTER'S TRANSISTOR - DIODE PACKAGE SPECIAL**

**.79** Pkg.

3 Pkgs. (can assort.) 2.09

**5 GENERAL PURPOSE DIODES**

SP-218

Package of 5 germanium glass diodes similar to 1N34A, 1N60, 1N64, 1N87A, etc.

**4 PNP TRANSISTORS**

SP-220

Package of 4 PNP Audio transistors similar to 2N107. Beta 15 minimum.

**2 NPN TRANSISTORS**

SP-219

Package of 2 NPN germanium transistors similar to 2N170 for Audio & RF. Beta 70 minimum.

**NEW! 8 TRANSISTORS PLUS DIODE MODULE KIT**

- All 8 Transistors Plus Diode in 2 Neatly Assembled Modules!
- Makes Superhet Radio Receiver Building Easy!

These transistor modules are high quality semiconductor assemblies containing individual stages that perform all the functions of individually wired transistors and diodes. The converter-IF module is designed to achieve optimum gain, and the necessary matching of the audio output stages is accomplished for maximum gain with minimum distortion. May be operated at from 6 to 9 volts. Modules are mounted on schematic and terminating and connecting points are clearly indicated. Supplied with schematic parts list for a complete superhet receiver and alignment instructions for building 8 transistor modular radio. Shpg. wt., 8 oz.

SP-245 Net 4.98

**4.98**

# Lafayette for ELECTRONICS, Science and Technology

## PHOTOCELL SPECIALS for Experimenters & Engineers

**NEW! CADMIUM PHOTOCELL FOR HEAVY DUTY OPERATION**

**2.45** •  $\frac{3}{8}$ " Light Area

An efficient cadmium photocell utilizing an extremely sensitive film element with  $\frac{3}{8}$ " light area. Ideal for relay operation, use door openers, counters, etc. Rated at 200V; 20ma; 0.2W power dissipation at 20°C. Sensitivity is 610 ± 50. Resistance Value Characteristics — 0 Ft. Candles: 1M ohm/ up; 0.929 Ft. Candles: 33K ohms; 9.29 Ft. Candles: 8K ohms. Size  $\frac{3}{8}$ " Diam. x  $\frac{3}{8}$ " depth. MS-886 Net 2.45

**NEW! LAFAYETTE CADMIUM PHOTOCELL**

**1.95** •  $\frac{3}{8}$ " Light Area

A quality cadmium photocell, perfect for transistor and printed circuit use. Employs sensitive film element with  $\frac{3}{8}$ " light area. Rated at 200V; 10ma; 0.1W, power dissipation @ 20°C. Sensitivity is 610 ± 50. Resistance Value Characteristics — 0 Ft. Candles: 2M ohms/ up; 0.929 Ft. Candles: 100K ohms; 9.29 Ft. Candles: 25K ohms; Size  $\frac{3}{8}$ " Diam x  $\frac{3}{8}$ " Depth. MS-885 Net 1.95

**NEW! LAFAYETTE MINIATURE SILICON RECTIFIER**

**.49**

• ONLY  $\frac{3}{8}$ " D x  $\frac{1}{2}$ " W

Premium quality and small size make this precision silicon rectifier ideal for prototype and miniature applications. Measures  $\frac{3}{8}$ " D x  $\frac{1}{2}$ " W plus  $\frac{1}{4}$ " mounting lip. Rated AC input voltage 117V, 110 to 130V. DC output current 10 ma, Intermittent 20 ma. Maximum input Capacitance 10 MF. MS-887 Net .49

**NEW! LAFAYETTE AUTOMATIC PHOTO-ELECTRIC 'LUMINATOR'**

- Automatic Light Switch
- Lights on at sunset—off at sunrise

**4.95**

New photo-electronic, light sensitive switch turns lights on and off at dusk and dawn. Better than a clock—no setting and resetting of timer. Variance in "on-off" cycle adds extra protection when away from home. You need never come home to a darkened house. The controlled lamps go on as darkness falls—stay on until sufficient day light returns or until manually turned off. Just plug it in for protection from prowlers—to turn on night lights—illuminate outdoor areas—light up brooders—green houses—displays—show windows—any place you require automatic illumination. Mounts most anywhere on rubber suction cup feet. Unobtrusive—measures only  $3\frac{1}{2}$ " x  $2\frac{1}{4}$ ". Use on 117 volt AC only. Maximum 300 watts lamp load. Instructions included. Shpg. wt., 1 lb. MS-790 Net 4.95

**CADMIUM SULPHIDE PHOTOCELL**

**1.59**

- For Sensitive Relay Actuation
- For Photo Electric Control

A neatly constructed crystal photocell that has countless applications in counting, relay actuation, etc. Resistance varies with light from 1 megohm in total darkness to approx. 1500 ohms at 100 foot candles. Responds to entire visible spectrum and is fast enough for relay operation. Minimum current output 66ma at 50 ft. candles at 90 volts. Power dissipation 2 watts for 5 seconds,  $\frac{1}{2}$  watt continuous. Output as low as .08ma at 1 ft. candle at 6 volts, varying with illumination intensity and applied voltage. Neatly encapsulated for easy mounting with leads for electrical connection.  $1\frac{1}{2}$ " x  $\frac{1}{2}$ " overall. MS-827 Net 1.59

**SELENIUM PHOTOCELL**

Excellent for

- Burglar Alarms
- Door Openers
- Counters

**8.75**

**OPERATES RELAYS DIRECTLY**

Barrier layer, self-generating type: light striking upon cell generates current sufficient to operate relays directly without the use of auxiliary power. Lifetime of cell is unlimited. 600 microamperes of output at 100 foot candles. 2 inches in diameter. Mounted in a handsome plastic case. MS-826 Photocell, Wt., 8 oz. Net 8.75  
CM-70 SOCKET FOR MS-826 Net .13

**OCTAL BASED PHOTO-CONDUCTOR**

**3.95**

- $\frac{1}{4}$ " High
- High Sensitivity
- Perfect For The Experimenter

A cadmium photo-conductor cell mounted in an octal type tube base for versatility in application. Ideal for mounting on chassis with all components of a photocell relay. Rated at 3.4 ma (4.9K ohms) at 9.25 foot candles. Dark current — 0.1 ua, 200 megs. Voltage rating — 200 volts DC. Spectral response covers from 4,000 to 8,000 angstroms. Maximum power dissipation (25°C/W): 0.05 Ambient temperature °C: —40 to +60. Voltage rating — 200 volts, DC or AC Peak Resistance Value Characteristics — 0 Ft. Candles: above 500,000 ohms; 0.929 Ft. Candles: 5,000; 30,000 ohms; 9.29 Ft. Candles: 90-5,000 ohms. Size:  $1\frac{1}{4}$ " height above base. Shpg. wt., 4 oz. MS-882 Net 3.95

**INFINITE DARK RESISTANCE PHOTO-CONDUCTOR**

**4.95**

- Mount This Lafayette Special In Any Position
- $\frac{1}{2}$ " Diam. x  $\frac{1}{2}$ " High

This Lafayette cadmium sulfide PHOTO-CONDUCTOR special can be mounted in many positions through two leads from the base of the cell. An ideal cell for the experimenter requiring extreme versatility. Ratings — 8.4ma (1.38K) at 9.25 foot candles, 0.05ua Dark current (infinite resistance) Spectral response covers from 4,000 to 8,000 angstroms. Maximum power dissipation (25°C/W): 1.0 Ambient temperature (°C): —40 to +60. Maximum voltage — 200 volts. Resistance Value Characteristics — 0 Ft. Candles: above 200K ohms; 0.929 Ft. Candles: 0.5 to 4K ohms; 9.29 Ft. Candles: 0.1 to 0.8K ohms. Size  $1\frac{1}{2}$ " High. Shpg. wt., 4 oz. MS-881 Net 4.95

**LAFAYETTE VC-64 STEREO LEVEL CONTROL**

- Dual Concentric 8-Ohm L Pads
- Logarithmic Curve

**3.98**

Two precision 8-ohm level controls concentrically mounted for stereo in one compact unit. Ideal for controlling individual volume control of stereo extension speakers without fear of mismatch or affecting volume of main speakers. Also may be used to vary "brilliance" or "presence". Output and input screw terminals for each channel provide for simple permanent hookup. Handsome cream finish with gold panel plate. Overall Size including knobs:  $3\frac{3}{8}$ " H x  $4\frac{1}{2}$ " W x  $2\frac{3}{8}$ " D. Shpg. Wt.,  $1\frac{1}{2}$  lbs. VC-64 Net 3.98

**NEW! LAFAYETTE SUPER-VALUE SUN BATTERY**

**QUANTITY LIMITED! 1.47**

Sensational buy enables Lafayette to offer this famous selenium photocell at a small fraction of its normal price! Approx 8 MA current output at 100 ft. candles with 55 ohms load! 5 volts open circuit voltage in av. sunlight, 30 MW power output at 100 ft. candles with 1000 ohm load! Truly a super buy for the experimenter, kit builder, etc. With colored pig-tail leads.  $1\frac{1}{2}$ " diam. MS-543 Net 1.47

**POWERMASTER TYPE CDS-10 CADMIUM SULPHIDE PHOTOCELL**

**2.50**

A miniature crystal photocell that is ideal for actuating, counting, measuring photo-electric control. Acts as a resistor that varies with the intensity of light from over 1 megohm in total darkness to under 1500 ohms at 100 foot candles. Rapid response fast enough to operate relays in 1/10 second. Minimum current output 66 ma at 50 ft. candles at 90 Volts. Output varies with illumination intensity and applied voltage to as low as .08 ma at 1 ft. candle at 6 volts. Power dissipation  $\frac{1}{2}$  watt continuous, 2 watts for 5 seconds. Usable response to entire visible spectrum with peak sensitivity to blue-green light and good red response. Response to infra-red is low. Size  $\frac{1}{4}$ " x  $\frac{3}{8}$ " x  $\frac{1}{4}$ ". MS-739 Net 2.50

**POLARIS "MAJ-I" RESISTOR PHOTOCELL**

**.95**

A cadmium-sulphide light-dependent resistor used to actuate door openers, burglar alarms, smoke detectors, light controls, production counters, etc. Resistance varies from 200 ohms at approx. 93 foot-candles to over 10 megohms in total darkness. Maximum volts: 110VAC (peak) 110VDC; maximum dissipation: .2 watt @ 40°C, .1 watt @ 50°C, 0 @ 60°C. Capacity approx. 6 mmf.  $\frac{1}{2}$ " diam. x  $\frac{3}{8}$ " thick. Shpg. wt. 3 oz. MS-791 Net 2.19

**SELF GENERATING PHOTOELECTRIC CELLS**

**AS LOW AS .53**

BELOW DISTRIBUTOR COST!

- Complete with leads
- No external power needed
- Output in sunlight up to 60 MA

Selenium, self-generating photocells convert sunlight or artificial light energy into electrical energy without any auxiliary source of power. Sensitive to a wide spectrum including white, colored or ultra-violet light. All unmounted; complete with leads. Outputs in table below taken at 100 foot candle illumination with 100 ohm load. Higher outputs obtainable with greater light. Shpg. wt., 3 oz.

Stock No.	Out. ua	Size	1-4	5-9	10
MS-771	100	$1\frac{1}{2}$ " x $\frac{3}{8}$ "	.59	.56	.53
MS-772	250	$1\frac{1}{2}$ " x $\frac{3}{8}$ "	.79	.75	.71
MS-773	350	$1\frac{1}{2}$ " x $\frac{3}{8}$ "	.89	.85	.80
MS-774	750	$1\frac{1}{2}$ " x $\frac{3}{8}$ "	3.16	3.03	2.88

**NEW! SUB-MINIATURE VARIABLE RESISTORS**

SIZE— $\frac{3}{8}$ " Dia.  $\frac{1}{8}$ " Thick

Carbon composition potentiometers built for the most compact installations—in transistor and sub-miniature circuits. Ideal for printed circuits. Shpg. wt., 2 oz.

VC-57 1000 ohms VC-60 50K ohms  
VC-58 5K ohms VC-61 500K ohms  
VC-59 10K ohms

**ONLY 29¢**

**LAFAYETTE DUAL TRANS. TUNING TOOL**

**49¢**

- For J & K Trans.
- Sturdy Polystyrene Construction
- Handy in Shop or Lab.

It's like having 2 tuning tools for the price of one—one side for J trans., the other side for K trans. About 5" long. Shpg. wt. 6 oz. F-646 Net .49

**NEW! LAFAYETTE CADMIUM SULPHIDE PHOTOCELL**

**OUTSTANDING VALUE .95**

New head-type window cadmium sulphide photocell. Maximum Ratings: 200V DC or AC, peak. Temperature is —40°C and +60°C; Resistance is 10 megohms at zero ft. candles, 100,000 ohms to 10 megohms at 1 foot candle, 100,000 to 350,000 ohms at 10 foot candles; Range of sensitive wave length is 4000 to 8000 angstroms. Size:  $\frac{1}{4}$ " diam. x  $\frac{3}{8}$ " L. o/a. Standard screw mount; miniature base. Shpg. wt., 4 oz. MS-855 Net .95

**KIT OF 3 MINIATURE ADJUSTABLE LOOPSTICKS**

- Nondirectional—Install in Any Position
- Pulls in Distant Radio Stations

**.89**

Lafayette's kit of 3 miniature adjustable loopsticks pull in those distant radio stations with amazing ease and clarity. Has set-screw adjusting slug to obtain maximum loudness. May be installed in any position. Complete with instructions. Shpg. wt., 8 oz. MS-880 Set of 3 Net .89

**NEW! MICRO-PERFORATED BOARDS**

- Ideal For Transistor And Subminiature Circuitry
- Copper-Clad For Printed Circuits
- Unclad Type For Wired Circuits

These sturdy, perforated boards are the ideal base for builders, experimenters, and labs to mount miniaturized components. Two types available: either high grade bakelite for wired circuits, or one side copper-clad for "printed" circuitry. Holes are  $\frac{1}{16}$ " diameter with  $\frac{1}{16}$ " between hole centers. All boards are  $\frac{1}{16}$ " thick. For contacts, the MS-263 flea clips listed on this page are ideal. Avg. shpg. wt., 6 oz.

**COPPER CLAD BOARDS**

Stock No.	Size	1	100	250
MS-847	$2\frac{1}{4}$ " x $3\frac{3}{8}$ "	.35	.30	.24
MS-848	$3\frac{1}{2}$ " x $6\frac{3}{4}$ "	.55	.50	.45
MS-849	$7\frac{1}{4}$ " x $6\frac{3}{4}$ "	1.15	.96	.87
MS-850	$10\frac{1}{2}$ " x $7\frac{1}{4}$ "	1.90	1.58	1.42

**UNCLAD BOARD**

Stock No.	Size	1	100	250
MS-304	$2\frac{1}{4}$ " x $3\frac{3}{8}$ "	.25	.20	.18
MS-305	$3\frac{1}{2}$ " x $6\frac{3}{4}$ "	.45	.40	.35
MS-306	$7\frac{1}{4}$ " x $6\frac{3}{4}$ "	.75	.65	.60
MS-846	$10\frac{1}{2}$ " x $7\frac{1}{4}$ "	1.20	1.08	.97

**COPPER CLAD LAMINATE AT LAFAYETTE'S LOW PRICES!**

Finest quality XXXP bakelite base, copper clad boards for printed circuit work. Av. shpg. wt., 2 ozs.

NO.	DESCRIPTION	NET
MS-510	XXXX Copper Lam.—1 side—9" x 12"	1.50
MS-511	XXXX Copper Lam.—1 side—6" x 12"	.45
MS-512	XXXX Copper Lam.—1 side—3" x 12"	.30
MS-513	XXXX Copper Lam.—1 side—2" x 12"	.25
MS-514	XXXX Copper Lam.—1 side—3" x 2 1/2"	.24
MS-515	XXXX Copper Lam.—2 sides—9" x 12"	1.95
MS-516	XXXX Copper Lam.—2 sides—6" x 12"	.60
MS-517	XXXX Copper Lam.—2 sides—3" x 12"	.40
MS-518	XXXX Copper Lam.—2 sides—2" x 12"	.30
MS-519	XXXX Copper Lam.—2 sides—3" x 2 1/2"	.27

**FLEA CLIPS FOR TRANSISTOR AND SUBMINIATURE CONTACTS**

"Flea" clips are specially designed for subminiature work. Fit perfectly in holes in perforated copper-clad and unclad boards listed above. Made of beryllium copper, silver plated finish. Simply insert wire thru hole for positive grip contact.

MS-263	Package of 12	Net .25
MS-851	Package of 1000	Net 15.75
MS-852	Package of 5000	Net 76.15
MS-853	Package of 10,000	Net 149.30

**PROFESSIONAL KNOBS**

Add professional appearance to any equipment. The ideal replacements or new knobs for—Test Equipment—Ham Radio—Hi-Fi—Experimental Gear, etc. Professional black-mat finish. To fit  $\frac{1}{4}$ " round shaft. All knobs come with set screw. The round knob with skirt has a white pointer for reset use. Size: Fig. A skirt dimen.  $1\frac{1}{2}$ " dia x  $\frac{3}{8}$ " H. Fig. B skirt dimen.  $\frac{3}{4}$ " dia x  $\frac{3}{8}$ " H. Fig. C  $\frac{3}{8}$ " dia x  $\frac{3}{8}$ " H. Shpg. wt., 7 ozs.

KN-61 Round Knob with Skirt & Pointer (Fig. A) Net .39  
KN-59 Round Knob with Skirt and Pointer (Fig. B) Net .34  
KN-60 Small Round Knob (Fig. C) Net .29

**VECTOR BREADBOARDS EXPERIMENTER'S TRANSISTOR CHASSIS KIT**

Experimenter's kit for rapid setup of transistor circuitry. Provides a  $\frac{1}{32}$ " thick perforated epoxy paper type AA, PUSH-IN-ZIP terminals, self-tapping screws and spacers, aluminum channel supports, potentiometer and switch mounting brackets, and other miscellaneous hardware and strips. Parts provided are special for connecting transistors. Circuit board has  $\frac{1}{32}$ " dia. holes spaced .265 centers. Size:  $4\frac{3}{4}$ " x  $8\frac{1}{2}$ ". Includes instructions. CN-325 Net 10.50

**VECTOR BOARDS**

Prepunched XXP Phenolic terminal boards (MIL-P-3115B) for breadboarding and production. .093" diameter prepunched holes 0.265" apart. For use with Vector push-in-terminals and solderless spring clips. 64A18 is  $\frac{1}{2}$ " thick; 64AA18 is  $\frac{3}{8}$ " thick. Both 64A18 and 64AA18 are  $4\frac{7}{8}$ " W x  $17\frac{1}{2}$ " L and have 64 holes in length and 18 holes in width.

Stock No.	Mfr. No.	1-19	20-99	100-199
CN-326	64A18	1.25	1.13	1.05
CN-327	64AA18	1.60	1.44	1.34

**VECTOR PUSH-IN TERMINALS**

Simplifies breadboarding. For .093 holes in  $\frac{1}{32}$ " or  $\frac{1}{16}$ " Vectorboard panels. Clips hold without staking. Accommodate most leads.

Serrated Push-In Terminal (Fig. 1) CN-328 Type T9.4 Bag of 100 Net 1.25  
Solderless Springclip Terminal (Fig. 2) CN-329 Type T-30N Bag of 10 Net 1.15  
Type T-30N Bag of 100 Net 8.45


**INSERTION TOOL FOR T-30N (Not Illustrated)**

CN-330 Type P-92 Each Net 1.00

# Lafayette SPECIALS for AMATEUR and CITIZEN BANDER

## NEW! Lafayette's SUPER-TROL R/C EQUIPMENT

(A) RADIO CONTROL TRANSMITTER: Assembled-tested-guaranteed. No license examination required for operation. Crystal controlled meets F.C.C. regulations. Uses powerful 3A5 tube for range of approximately one mile. Operates 27.255 mc R/C receiver. Overall only 8 1/2" x 2 3/4" x 1 3/4". Includes antenna—tube—crystal—and instructions. Less Batteries. Shpg. wt., 2 1/2 lbs. F-249

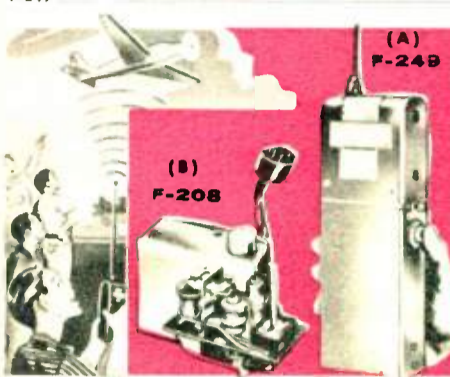

BA-124 Burgess U30 (3 needed) 1.75 ea.  
BA-157 Burgess #2 (1 needed) .13 ea.

(B) RADIO CONTROL RECEIVER: Completely wired and tested. Completely enclosed—ideal in boats—or case may be removed if desired. Designed to withstand vibration and shock. External fine tuning—antenna "snap" lead—plug for power and actuator connections. Ideal Companion for F-249 Transmitter. Requires one 1.5V battery and one 67.5 Volt battery. Size determined by use. Measures only 3" x 2 3/4" x 1 1/2". Complete with tube and instructions. Less batteries. Shpg. wt., 8 oz.

F-208 Net 8.95  
Batteries required: BA 130 Burgess UX45 (1 needed) 2.07 ea.  
BA-157 Burgess No. 2 (1 needed) .13 ea.

**SPECIAL COMBINATION OFFER**  
F-259—Combination Consists of R/C Transmitter (F-249), and R/C Receiver (F-208) 2.00 Down  
Net 22.90



(A) REMOTE CONTROL ESCAPEMENT

2 arm self-neutralizing escapement. Converts electrical impulses from remote control receiver to mechanical motion. Four 90° rotations—two by armature activation, two by neutralization. Has ratchet governor for maintaining foolproof rotating speed. Weighs only 7/8 oz. Size 1 3/8" L x 2" W overall. Shpg. wt., 5 oz.


(B) REMOTE ENGINE CONTROL ESCAPEMENT

Air-bleed self-neutralizing remote engine control. Neutral position of one arm is low speed, neutral position of 2nd arm is high speed, and maintained activated position of either arm (armature activated) stops motor. Weighs only 3/4 oz. Requires 1 1/2 volt battery. Low current drain. Size: 1 3/8" x 1" x 3/4". Shpg. wt., 5 oz.

(C) COMPOUND REMOTE CONTROL ESCAPEMENT

One pulse gives right turn, two pulses gives left turn. Three pulses closes the circuit for the supplementary control. The rudder always returns to neutral as transmitter keying button is released. Ratchet governor. Uses 1 1/2 volt battery. Weighs 1 1/8 oz. Size: 2 7/8" L x 1 1/2" overall. Shpg. wt., 6 oz.

## 3 TRANSISTOR SUBMINIATURE AUDIO AMPLIFIER

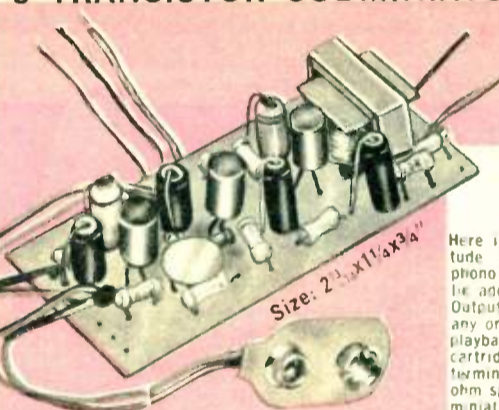


- TERRIFIC FOR THE EXPERIMENTER, HOBBYIST, AND KIT BUILDER!
- PRINTED CIRCUIT
- Complete with Transistors

**3.95**

Here is an amazing little audio amplifier with a multitude of challenging applications. i.e., subminiature phono amplifier, tape recorder amplifier, hand-held public address amplifier, telephone pick-up amplifier, etc. Output sufficient for average listening. Has leads for any one of the following inputs: Tape recorder record/playback heads, radio-tuner, crystal or ceramic phono cartridge, and crystal or ceramic microphone. Has lead terminations for ON-OFF switch, Volume Control, 4 to 10 ohm speaker, and leads terminating in clips for a 9 volt miniature battery. Size 2 1/2" x 1 1/4" x 3/4". Can be readily mounted on chassis. Shpg. wt., 8 oz.

PK-522 Net 3.95  
BA-2 9 Volt Battery Net .49  
5K ohm Volume Control with SPST Switch and Knob. Shpg. wt., 2 oz.  
VC-62 Net .59  
Miniature Crystal Microphone 1 1/8" Diam x 1/2" Deep. Shpg. wt., 6 oz.  
MS-108 Net 1.49  
Miniature Speaker 2 1/2" Diam, 10 ohms Voice Coil Impedance. Shpg. wt., 8 oz.  
SK-66 Net 1.49

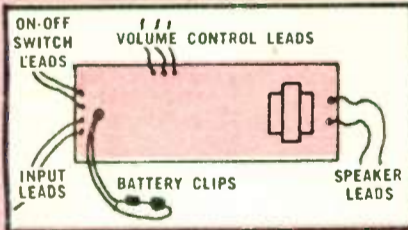

## PORCELAIN CASED TUBULAR CAPACITORS



### MOST POPULAR SERVICE VALUES

KIT OF 100 600V W V DC		KIT OF 50 600V W V DC	
QTY.	MFD.	QTY.	MFD.
10	.001	5	.001
10	.002	5	.002
10	.003	5	.003
20	.01	10	.01
20	.02	10	.02
20	.05	10	.05
10	.1	5	.1

KIT NO. KI-52 KIT NO. KI-51

**4.95** SPECIAL NET **2.75** SPECIAL NET

- Tested At 3 Times Working Voltage
- Exceptionally Resistant To High Temperatures and Moisture
- Surpasses Performance of Molded Plastic Tubulars

Designed for critical industrial application—priced for everyday service work. The case is of durable gleaming porcelain, a ceramic known for its high degree of imperviousness to moisture and resistance to heat. Tested at 3 times the rated voltage with much closer capacity tolerance. The leads are firmly attached and sealed—they won't twist or break off. Each condenser is plainly marked. Each value is mounted on separate handy strips. All are conservatively rated at 600 DC working volts. See chart for contents of each kit.  
KI-51—Kit of 50 Shpg. wt., 1/2 lb. Net 2.75  
KI-52—Kit of 100 Shpg. wt., 1 1/2 lbs. Net 4.95

## LAFAYETTE METAL CASED OIL FILLED TUBULAR CAPACITORS

- Exceptional capacitance stability
- 10% Tolerance
- High insulation resistance
- Wide temperature range




Oil-filled and oil impregnated paper capacitors. Feature 100% tolerance. Operate efficiently from -40°C to +100°C. Ruggedly constructed in metal case with plastic insulating outer sleeve. Has low dielectric leakage, low power factor and exceptional capacitance stability. Ideal for replacement and original applications in radio, TV and other electronic equipment. Doubly tinned copper-weld type leads are firmly attached to the case. Conservatively rated at 600 WVDC. Avg. shpg. wt., 2 oz. each

Type	Cap. Mfd.	Size D x L	NET EACH		
			Single	Lots of 10	Lots of 100
C-800	.001	9/32 x 26/32"	.09	.81	6.00
C-801	.002	9/32 x 26/32"	.09	.81	6.00
C-802	.005	9/32 x 27/32"	.09	.81	6.00
C-803	.01	9/32 x 27/32"	.10	.90	6.50
C-804	.02	10/32 x 27/32"	.11	.99	7.50
C-805	.05	13/32 x 1"	.12	1.08	9.50
C-806	.1	15/32 x 1 1/4"	.14	1.26	11.40

## 27.255 CITIZENS BAND AND R/C CRYSTAL .005% TOLERANCE!



Reg. 2.95  
Designed specifically for use in R/C model planes, boats, cars, etc., as well as on channel 23 of class "D" Citizens Band Equipment. Type HC-6 U holder; Pin spacing .493; Pin dia. .050".  
MS-786 Net 1.89

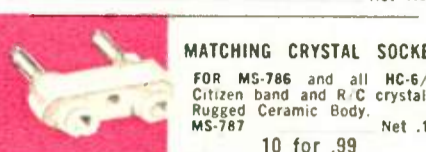

### MATCHING CRYSTAL SOCKET

FOR MS-786 and all HC-6/U Citizen band and R/C crystals. Rugged Ceramic Body. MS-787 Net .15  
10 for .99

## miniature TELESCOPING ANTENNA



### RETRACTS to 9 INCHES with PLASTIC CASE

Ideal for mobile or fixed transceivers, miniature portable and pocket transistor radios, wireless broadcasters and a host of similar applications. This 5-section antenna is made of chrome-plated brass and plugs into a jack which is supplied. Measures 38" fully extended and retracted is 9" to facilitate carrying in pocket. Comes in a flexible plastic case with slip-under protecting flap.  
F-343 Telescoping Antenna Net .59

## DISTLER MINI-MOTOR

- EXTREMELY EFFICIENT
- VOLTAGE RANGE 1.5 to 6 V.D.C.



Exceptionally versatile miniature D.C. motor. Operating voltage: from 1.5 to 6 volts D.C. Extremely low current drain. Will operate on voltages for above and below rated requirements. Ball bearings afford maximum efficiency. Transparent plastic brush housing—removable brushes—tubular form. Overall size 2 3/8" L x 1" D. Shaft 3/32". Weight 2 1/4 oz. Recommended for industrial and laboratory development work. Used in remote control devices, models, displays, etc.  
F-258 Shpg. wt., 6 oz. Net 2.25

## LAFAYETTE TRANSISTOR ULTRA-MINIATURE ELECTROLYTIC CONDENSERS

Latest subminiature electrolytic capacitors. Hermetically sealed aluminum cases, especially suitable physically and electrically for application in transistor and miniature electronic circuits. Long shelf-life, stable capacity and low leakage current. Super value in ultra-miniature electrolytics. Shpg. wt., 2 oz.

Stock No.	Description	Dia.	Length	Net
CF-100	2 mfd 6 volt	1 1/2"	3 1/2"	.26
CF-101	4 mfd 6 volt	1 1/2"	3 1/2"	.26
CF-102	8 mfd 6 volt	1 1/2"	3 1/2"	.29
CF-103	10 mfd 6 volt	1 1/2"	3 1/2"	.29
CF-104	30 mfd 6 volt	1 1/2"	3 1/2"	.29
CF-105	50 mfd 6 volt	1 1/2"	3 1/2"	.31
CF-106	100 mfd 6 volt	1 1/2"	3 1/2"	.39
CF-112	8 mfd 12 volt	3/8"	7/8"	.26
CF-118	1 mfd 15 volt	3/8"	7/8"	.29
CF-120	2 mfd 15 volt	3/8"	7/8"	.29
CF-129	3 mfd 15 volt	3/8"	7/8"	.29
CF-121	6 mfd 15 volt	3/8"	7/8"	.29
CF-122	10 mfd 15 volt	3/8"	7/8"	.29
CF-123	20 mfd 15 volt	3/8"	7/8"	.29
CF-124	30 mfd 15 volt	3/8"	7/8"	.29
CF-125	50 mfd 15 volt	3/8"	1 1/4"	.31
CF-126	100 mfd 15 volt	3/8"	1 1/4"	.45
CF-127	160 mfd 15 volt	3/8"	1 3/8"	.49
CF-140	2 mfd 25 volt	3/8"	7/8"	.29
CF-141	6 mfd 25 volt	3/8"	7/8"	.29
CF-142	10 mfd 25 volt	3/8"	7/8"	.31
CF-143	25 mfd 25 volt	3/8"	7/8"	.31
CF-144	50 mfd 25 volt	3/8"	1 1/4"	.35
CF-145	160 mfd 25 volt	3/8"	1 3/8"	.49

## NEW!

LAFAYETTE  
27.255 MC  
CITIZENS BAND  
REMOTE CONTROL  
TRANSMITTER KIT

KT-127  
**17.25**



WITH .005% TOLERANCE CRYSTAL TWICE AS GOOD AS FCC REQUIRES! OVER 1 MILE LINE-OF-SIGHT TRANSMISSION! EXCEPTIONAL STABILITY FOR FOOLPROOF CONTROL OF MODEL PLANES, BOATS AND CARS.

You'll marvel at the neatness, simplicity and dependability of Lafayette's RC Citizens Band Transmitter. Crystal-controlled with a .005% tolerance crystal for extra frequency stability; exceeds FCC tolerance requirements. Fits comfortably in the palm of your hand, yet is unaffected by hand capacitance or motion. Has new attractive wide scale meter for visually tuning transmitter. Wide, non-critical tuning for optimum foolproof performance. Tuning for proper output and antenna loading easily accessible. Complete with telescoping antenna, meter, tube, crystal, alignment tool, all parts and easy step-by-step instructions. FCC license application forms enclosed. Size 10x4x2 1/2". Shpg. wt. 5 lbs.  
KT-127 less batteries Net 17.25  
BA-157 Burgess No. 2 battery Net .13  
BA-133 Burgess P 45 battery 2 ea. @ 2.17 Net 4.34

**1.95**

**"JEWEL" REMOTE CONTROL RELAY**

A natural for remote control receivers, it is highly sensitive, and built to withstand severe crashes. The smallest commercial job available, it weighs less than 1/2 oz. Factory adjusted to pull in at 1.4 MA. drop out at 1.2 MA D.C. Single pole, double throw. Used in outstanding R/C receivers. 5,000 ohm coil. IMPORTED TO SAVE YOU MONEY.  
F-260—Relay Shpg. wt., 2 oz. Net 1.95

## Lafayette MYLAR "TITANEX" Miniature Capacitors

AS LOW AS **.13**

- 10% Tolerance
- Tested to Working Voltage x 250%

Pressure molded, solid block construction. Exceptional humidity resistance. Du Pont MYLAR polyester film dielectric. Resin dip insulation. Designed for circuits requiring extremely small stable components—ideal for printed or transistor circuitry. Temperature range from -25°C to 85°C without derating. All are rated at 75 W.V. D.C. Shpg. wt., 2 oz.

STOCK #	CAP. MFD.	Size WxTxH	Net	
			1-9	10-99
CF-150	.0005	3/32x3/32x1/32	.13	.11
CF-151	.001	3/32x3/32x1/32	.13	.11
CF-152	.002	3/32x3/32x1/32	.13	.11
CF-153	.005	3/32x3/32x1/32	.13	.11
CF-154	.01	3/32x3/32x1/32	.15	.13
CF-155	.02	3/32x3/32x1/32	.15	.13
CF-156	.05	3/32x3/32x1/32	.24	.21
CF-159	.05	1/16x1/16x1/32	.24	.21
CF-157	.1	1/16x1/16x1/32	.36	.32
CF-160	.1	1/16x1/16x1/32	.36	.32
CF-158	.25	5/8x3/8x3/8	.48	.43

# SAVE

## UP TO 56% OFF MFR'S LIST ON YOUR RECEIVING TUBE PURCHASES PLUS FREE VALUABLE GIFTS ON PURCHASE OF 15 OR MORE TUBES



30 WATT SOLDERING PENCIL



Reg. Price 1.79

FREE with Purchase of 15 Receiving Tubes

TECHNICIAN'S ELECTRIC TOOL KIT



Reg. Price 7.95

FREE with Purchase of 50 Receiving Tubes

20,000 Ohms-Per-Volt VOM



Reg. Price 13.50

FREE with Purchase of 100 Receiving Tubes

ALL BRAND NEW — FRESH STOCK — ORIGINAL BOXED TUBES • FULL 12 MONTH GUARANTEE • YOU MAY ASSORT FOR QUANTITY — PRICE SAVINGS!

ALL BRAND NEW—FRESH STOCK—ORIGINAL BOXED TUBES • FULL 12 MONTH GUARANTEE • YOU MAY ASSORT FOR QUANTITY—PRICE SAVINGS!

TUBE TYPE	List Price	NET EACH IN QUANTITIES OF:		
		1 to 5	6 to 49	50 or more
0Z4	2.40	1.27	1.18	1.06
1B3GT	2.90	1.54	1.42	1.28
1R5	2.70	1.43	1.32	1.19
1T4	2.50	1.32	1.22	1.11
1U4	2.50	1.32	1.22	1.11
1U5	2.20	1.17	1.08	.97
1X2A/B	3.05	1.62	1.49	1.34
3BZ6	2.25	1.19	1.10	.99
3CB6	2.25	1.19	1.10	.99
3V4	2.50	1.32	1.22	1.11
5U4GB	2.10	1.11	1.03	.93
5U8	3.30	1.74	1.62	1.46
5V4GA	3.50	1.85	1.71	1.55
5Y3GT	1.75	.93	.86	.77
6AB4	2.15	1.14	1.05	.94
6AC7	4.85	2.57	2.38	2.14
6AF4A	4.00	2.12	1.96	1.76
6AG5	2.75	1.45	1.35	1.21
6AL5	1.85	.98	.91	.81
6AM8A	3.25	1.71	1.59	1.43
6AN8A	3.50	1.85	1.71	1.55
6AQ5A	2.15	1.14	1.05	.94
6AS5	2.40	1.27	1.18	1.06
6AU4GTA	3.55	1.88	1.74	1.57
6AU6A	2.10	1.11	1.03	.93
6AU8A	3.50	1.85	1.71	1.55
6AV6	1.65	.87	.80	.72
6AW8A	3.55	1.88	1.74	1.57
6AX4GT	2.65	1.40	1.30	1.17
6BA6	2.00	1.06	.98	.88
6BC5	2.45	1.29	1.20	1.08
6BE6	2.20	1.17	1.08	.97
6BG6GA	6.50	3.44	3.19	2.87
6BK7B	3.35	1.77	1.64	1.48
6BL7GTA	3.95	2.09	1.93	1.74
6BN6	3.00	1.59	1.47	1.32

Serviceman & Dealer SPECIAL!

### LAFAYETTE TUBE TESTER

## FREE!



With Purchase of 150 Receiving Tubes

Reg. Price 19.95

Full Size Tube Checker 8 1/2" Dx 9 3/4" W x 2 3/8" H

TUBE TYPE	List Price	NET EACH IN QUANTITIES OF:		
		1 to 5	6 to 49	50 or more
6BZ6	2.25	1.19	1.10	.99
6BQ6G7B / 6CU6	4.35	2.30	2.13	1.92
6BQ7A	3.95	2.09	1.93	1.74
6BZ7	4.00	2.12	1.96	1.76
6C4	1.85	.98	.91	.81
6CB6A	2.25	1.19	1.10	.99
6CD6GA	5.80	3.07	2.84	2.56
6CG7	2.45	1.29	1.20	1.08
6DE6	2.45	1.29	1.20	1.08
6DQ6B	4.10	2.17	2.01	1.81
6E6	2.80	1.48	1.37	1.23
6K6GT	2.50	1.32	1.22	1.11
6L6GC	2.70	2.22	2.06	1.85

TUBE TYPE	List Price	NET EACH IN QUANTITIES OF:		
		1 to 5	6 to 49	50 or more
6S4A	2.05	1.09	1.00	.90
6SK7	3.55	1.88	1.74	1.57
6SN7GTB	2.60	1.37	1.27	1.14
6SQ7	3.30	1.74	1.62	1.46
6T8A	3.35	1.77	1.64	1.48
6UBA	3.30	1.74	1.62	1.46
6V6GT	2.15	1.14	1.05	.94
6W4GT	2.40	1.27	1.18	1.06
6W6GT	2.85	1.51	1.40	1.26
6X4	1.65	.87	.80	.72
6X5GT	2.05	1.09	1.00	.90
6X8	3.15	1.67	1.54	1.39
12AT6	1.65	.87	.80	.72
12AT7	3.05	1.62	1.49	1.34
12AU6	2.15	1.14	1.05	.94
12AU7A	2.45	1.29	1.20	1.08
12AV6	1.65	.87	.80	.72
12AX4GTB	2.70	1.43	1.32	1.19
12AX7	2.55	1.35	1.25	1.12
12BA6	2.00	1.06	.98	.88
12BE6	2.15	1.14	1.05	.94
12BH7A	3.05	1.62	1.49	1.34
12BY7A	3.05	1.62	1.49	1.34
12SA7	3.90	2.07	1.91	1.72
12SA7GT	3.25	1.71	1.59	1.43
12SK7	3.55	1.88	1.74	1.57
12SQ7	3.30	1.74	1.62	1.46
25L6GT	2.25	1.19	1.10	.99
35C5	2.15	1.14	1.05	.94
35L6GT	2.40	1.27	1.18	1.06
35W4	1.40	.74	.69	.62
35Z5GT	1.85	.98	.91	.81
50B5	2.65	1.40	1.30	1.17
50C5	2.15	1.14	1.05	.94
50L6GT	2.40	1.27	1.18	1.06
117Z3	2.50	1.32	1.22	1.11

NOTE: This is a partial listing.

This gift offer also applies to your selection from our complete receiving tube listing on Pages 98 and 99, Catalog 610.

Your order is shipped at current prices. You benefit from any price reductions during life of this catalog.

## LAFAYETTE BUDGET-PRICED TV PICTURE TUBES MONEY SAVING SPECIALS!

• FULL 1-YEAR GUARANTEE

Every Lafayette picture tube is top quality—made or entirely new materials except the glass, which is tested and inspected to meet new-glass standards.

Stock No.	Type	NET PRICE	
		Less Dud	With Dud
PT-404X	10BP4††	12.35	10.35
PT-405X	12KP4A*	9.60	8.10
PT-350X	12LP4A	12.70	10.70
PT-352X	14C B EP4B*	11.30	9.30
PT-351X	14EP4 CP4	13.35	11.35
PT-391X	14QP4A*	13.35	11.35
PT-393X	14RP4*	13.95	12.95
PT-353X	16AP4/AP4A	13.75	12.45
PT-354X	16GP4	9.95	8.50
PT-355X	16KP4 RP4	12.00	10.80
PT-356X	16KP4A/RP4A/TP4A*	16.95	14.50
PT-394X	17AVP4	18.95	14.50
PT-395X	17AVP4A*	12.95	11.80
PT-357X	17BP4 BP4A	15.30	13.70
PT-358X	17BP4B*	19.95	15.50
PT-359X	17CP4	18.50	14.05
PT-360X	17GP4 TP4	14.95	10.95
PT-361X	17HP4 RP4	16.50	12.75
PT-362X	17HP4B RP4C*	14.25	11.50
PT-363X	17LP4 VP4	16.95	13.95
PT-364X	17LP4A VP4B*	13.95	10.75
PT-397X	17QP4 YP4	15.50	12.50
PT-398X	17QP4A YP4A*	19.50	14.95
PT-365X	19AP4A		

Stock No.	Type	NET PRICE	
		Less Dud	With Dud
PT-366X	19AP4B	18.95	15.00
PT-367X	20CP4A DP4A	14.95	11.50
PT-368X	20CP4D DP4C*	15.50	11.75
PT-370X	21ACP4A AMP4A BSP4*	18.50	12.25
PT-371X	21ALP4	18.50	11.95
PT-372X	21ALP4A/ATP4A*	22.75	16.35
PT-369X	21AP4	19.50	13.50
PT-373X	21AUP4 AVP4	20.25	13.95
PT-374X	21AU AVP4B*	18.50	12.00
PT-399X	21BTP4		
PT-400X	21BTP4A*	18.50	12.00
PT-375X	21CBP4A*	22.95	15.95
PT-401X	21DEP4*	26.50	19.95
PT-376X	21EP4A	15.95	12.00
PT-377X	21EP4B*	19.25	15.50
PT-378X	21FP4A KP4A	16.50	12.75
PT-379X	21FP KP4C*	17.75	13.95
PT-402X	21MP4	24.05	17.55
PT-380X	21WP4	19.50	13.50
PT-381X	21WP4A*	21.75	15.50

Stock No.	Type	NET PRICE	
		Less Dud	With Dud
PT-382X	21YP4	19.50	12.95
PT-383X	21YP4A*	21.50	15.50
PT-384X	21ZP4 ZP4A	18.95	12.50
PT-385X	21ZP4B*	18.95	13.50
PT-386X	24CP4	27.50	18.45
PT-387X	24CP4A*	28.25	20.00
PT-403X	24DP4	28.95	19.50
PT-389X	24DP4A*	29.75	21.50

AVERAGE SHIPPING WEIGHTS FOR PICTURE TUBES			
Size of tube	Avg Shpg Wt	Size of tube	Avg Shpg Wt
5"	5 lbs.	12"	17 lbs.
7"	7 lbs.	14"	21"
8"	8 lbs.	16"	22 lbs.
9"	10 lbs.	17"	24 lbs.
10"	14 lbs.	19"	26 lbs.


The size of the picture tube is determined by the first two digits in the type number.

### Serviceman & Dealer SPECIAL!

## INDOOR T.V. ANTENNA

Classic design for any TV set. 3-section telescoping elements. Shpg. wt., 1 lb.

AN-105 **85¢ ea.**  
6 or more **77¢ each**  
12 or more **65¢ each**

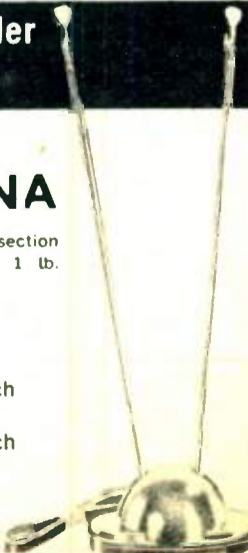

### A LAFAYETTE Serviceman SPECIAL!



**Economy TUBE CADDY**  
• Holds More Than 150 Tubes  
Only **5.95**

Lafayette now offers a tube caddy with a capacity of more than 150 tubes at this low, low price. Sturdily constructed of wood and kraft-board with easy-to-open lid. Overall 17Wx12 1/2Hx 7 3/4"D. Shpg. wt., 8 lbs. Net 5.95





# BUILD YOUR OWN!

## LAFAYETTE *Quality* KITS



### New! EXCITING EXPLOR-AIR 4 BAND RECEIVER KIT

**21.95**



- 4 Bands for total coverage:
- 550-1600 Kc broadcast band
- 1.7-5.0 Mc., 5.0-14 Mc., 14-30 Mc. shortwave bands
- Complete bandswitching from front panel
- Built-in Big 4" PM Loudspeaker

The most sensational shortwave economy receiver kit ever offered. A complete shortwave and standard broadcast set which covers the entire region from 550 kilocycles to 30 megacycles. Four whole bands of fascinating programming unavailable elsewhere. Perfect for students of languages, radio amateurs and casual listeners.

Only a regenerative circuit can offer such amazing performance and yet be so simple to build. Building this fine kit is an absolute pleasure — it's so well designed you can't go wrong. Kit includes all the parts you need, and the detailed step-by-step instruction book with its giant pictorial drawings shows you just how to put them together.


One front panel knob does all the bandswitching at the flick of the wrist, immediately taking you from band to band. All coils are prewound for greater accuracy. This kit is so easy to build a child who can read could do it (and many already have!) The chassis is completely isolated from the circuit, so there is no shock hazard.

This precision radio kit is just full of extra features. Complete 4 band coverage of broadcast stations, international broadcast bands, amateur, maritime, fire and police services, yes, even satellite signals! Big 4" speaker and sensitive circuit with 50C5 output stage and 12AX7 regenerative detector and amplifier stages give you all the volume you want. Phone jack for privacy automatically disconnects speaker. All controls are on the front panel: On-Off Volume, Main Tuning, Band Spread, Bandswitch, Antenna Tuning, and Regeneration. 110 Volt 50-60 cycle AC-DC power supply lets you use this fine set anywhere. Size: 10" x 7" x 5". Everything needed for unexcelled reception is combined in a compact, economical package.

KT-135 EXPLOR-AIR RECEIVER KIT (Less Cabinet) wt., 5 lbs. **21.95**  
ML-150 Leatherette covered Wooden Cabinet for above, 1 lb. **Net 2.75**

### New! 20-IN-1 TRANSISTOR Experimenters Kit

FUN TO BUILD — EDUCATIONAL — and ALL 20 projects result in a useful working instrument!

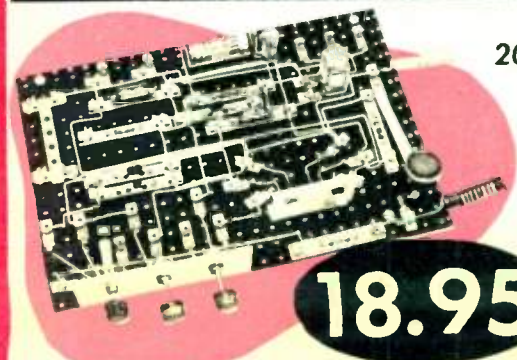

**18.95**

1. TRANSISTOR TESTER
2. VOICE ACTUATED ALARM
3. PHOTO TIMER
4. AUDIO AMPLIFIER
5. CRYSTAL SET
6. SOLAR RADIO
7. RAIN ALARM
8. TIMER
9. ONE TRANSISTOR RECEIVER
10. CODE PRACTICE OSCILLATOR
11. METRONOME
12. TWO TRANSISTOR RECEIVER
13. ELECTRONIC GAME
14. HOME BROADCASTER
15. PHOTO ELECTRIC RELAY
16. BURGLAR ALARM
17. WIRELESS TRANSMITTER
18. REGENERATIVE RECEIVER
19. CITIZENS BAND MONITOR
20. AUDIO OSCILLATOR

This new Educational Kit opens the field of transistor projects with all its fascinating circuits and gadgets in a simple, easy-to-follow manner. Excellent for beginners as well as advanced experimenters, this kit enables you to build and learn about 20 interesting and useful transistor circuits. By utilizing Breadboard construction, each project can be simply wired and tested. After building the basic circuit, any of the 20 projects can be built by simply inserting a few pre-assembled component blocks and interconnecting leads between them. A soldering iron is only required for the basic wiring and not for subsequent projects. All wiring is covered in a step-by-step manner by the instruction manual. Each of the 20 projects is clearly presented with pictorial instructions, large easy-to-read pictorial wiring diagrams, schematic diagrams, and an explanation of the kit's operation. There are no 90 voltages to produce


shock hazard. Amaze your friends with a Voice Actuated Alarm, Rain Alarm, Home Broadcaster, and other projects. Build useful projects for the home — Metronome, Burglar Alarm, and Timer Learning Morse Code with the Code Practice Oscillator and receiving Short Wave Citizens Band Stations are only a few more of the many interesting and useful things you will build while exploring this new world of transistor electronics. The kit is complete with perforated mounting board, 2 transistors, 1 diode, earphone light sensitive plate, and all other parts required for construction. The detailed 28 page instruction manual contains a wealth of information about each project. Less batteries and tools. Shpg. wt., 6 lbs.

KT-173 Complete **Net 18.95**  
BA-155 Z Cell Battery for Kit projects **Net .095**  
BA-270 270 Volt Battery for Kit projects **Net 1.61**

**SIMPLE TO FOLLOW SCHEMATICS**



### LAFAYETTE 10-in-1 LAB KIT • EDUCATIONAL • PRACTICAL

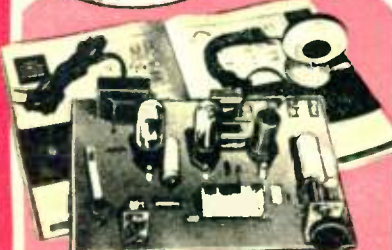

**15.50**


- With this Kit YOU can build
1. RADIO RECEIVER
  2. PHONO-MICROPHONE AMPLIFIER
  3. PHONO OSCILLATOR
  4. BROADCAST STATION
  5. CODE PRACTICE OSCILLATOR
  6. SIGNAL TRACER
  7. CAPACITY OPERATED RELAY
  8. ELECTRONIC TIMER
  9. ELECTRONIC SWITCH
  10. PHOTOCELL RELAY

Here is a new laboratory tested experimenters kit designed to provide maximum instruction and entertainment and which is ideal for both the beginner and advanced experimenter. Features practical and interesting circuits which enable you to do many novel and interesting things while learning how these circuits function. You can broadcast your voice or play a phonograph through your radio from anywhere in the house, send code through a headphones or radio, or use light or body capacitance to activate electrical circuits. Safe, low voltage is utilized. Kit is complete with perforated mounting board, 3 vacuum tubes, microphone and all parts necessary for construction. A detailed

12 page instruction manual contains simple-to-follow pictorial and schematic diagrams for each project. Less headphone, photoelectric cell and socket, wire and solder. Shpg. wt., 5 lbs. **Net 15.50**

PHOTOELECTRIC CELL TUBE TYPE 868. Shpg. wt., 8 oz. **3.75**  
CM-70 AMPHENOL 77MIP4 SOCKET FOR ABOVE. Shpg. wt., 1 oz. **.13**  
ME-33 CANNON AM-15-1 1000 OHM SINGLE HEADPHONE. Shpg. wt., 1 lb. **1.18**

### NEW! ELECTRONIC EDUCATIONAL KIT "GUIDED TOUR" INTRODUCTION TO THE WORLD OF ELECTRONICS

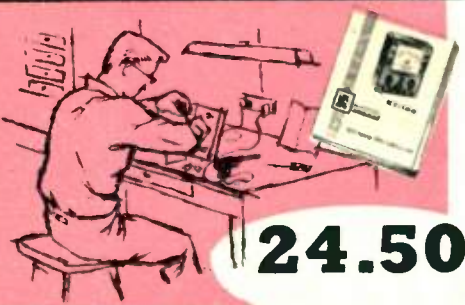

**24.50**

- ENABLES REPAIR OF HOUSEHOLD APPLIANCES
- COMPLETE STEP-BY-STEP INSTRUCTION MANUAL
- 12 COMPLETE EXPERIMENTS RESULT IN A FINISHED AC AND DC TEST INSTRUMENT
- TEACHES, AS YOU BUILD, THE IMPORTANT PRINCIPLES OF AC AND DC FUNDAMENTALS
- HELPS YOU TO LEARN ABOUT THE IMPORTANT AND FUN-FILLED FIELD OF ELECTRONICS!

This new Electronic Educational Kit enables youngsters and adults to discover the fascinating field of electronics in a simple, easy-to-follow manner. Not a toy—this kit is a complete beginners electronics laboratory course including a highly useful AC/DC Multimeter to build and learn from.

In the process of constructing this test meter, the fundamental principles of electricity and electronics are introduced in a "learn-by-doing" method. The focus of attention is on the basic sensitive meter for measuring the flow of electrical current. From this simple measurement, the meter is built up to indicate voltage and resistance. The detailed instruction manual is written in simple, easy-to-read, step-by-step manner, covering both AC and DC circuits that may be constructed and tested. This "guided tour" of electrical fundamentals continues to cover Ohms Law, series and parallel connections, making electro-magnets, producing electricity by induction, and testing of home appliances. Having completed the 12 experiments and construction of the AC DC multi-tester, the student has a useful instrument that has many applications in the home, workshop, and business. The kit is supplied less batteries, but is otherwise complete with everything needed for an enlightening introduction to the world of Electronics. Shpg. wt., 5 lbs. **Net 24.50**

KT-180 **Net ea .095**  
BA-155 (Burgess Z type battery, 2 required)

### SUPER-SENSITIVE PHOTOCELL ELECTRONIC RELAY KIT



**12.95**

- WITH CLAIREX CADMIUM SULPHIDE PHOTOCELL
- ADJUSTABLE SUPER SENSITIVITY — WORKS WITH JUST A FLASHLIGHT AT 250 FEET!
- NEEDS NO SPECIAL HIGH-INTENSITY LIGHTS
- INSTANTANEOUS OR SUSTAINED OPERATION ON THE FLIP OF A SWITCH!

Ideal for both sustained and instantaneous on-off operation. Use for burglar alarm, door buzzers, turning lights on, door opening, motor activation and countless industrial applications. Switch converts unit from instantaneous "on-off" to sustained "on" operation. "RESET" switch opens the external circuit and turns off the alarm. The unit operates on 110 volts AC and incorporates the efficient 5823 cold cathode tube, permitting longer life since there are no filaments to burn out. The controlled circuit is plugged into a convenient 110V AC output socket. A simple change in wiring (in instructions), as well as convenient input terminals, enable you to supply the external circuit with any desired voltage. Relay contacts rated at 3 amps permitting up to 300 watts external load on 110 Volts AC. Complete with all parts, photocell tube, chassis, silk-screened metal cabinet and easy-to-follow illustrated instructions. Size 3x4x5". **Net 12.95**

### NEW! LAFAYETTE STEREO PHONO 18.95 AMPLIFIER KIT



**18.95**

- GANGED TONE CONTROLS
- STEREO-MONAURO SWITCH
- .04 VOLT SENSITIVITY
- 4 WATTS STEREO OUTPUT
- ISOLATION TRANSFORMER
- SEPARATE VOLUME CONTROLS

This is a complete 4-watt hi-fi stereo amplifier having 2 watts output per channel. Features separate volume control for each channel, ganged tone controls, Stereo-monaural switch to feed one channel to both speakers and to reverse the channels. An isolation transformer makes this circuit extra safe. Other circuit features for better performance include application of negative feedback to driver and output stages for wide-range response and extra low distortion. Dual-triode 12AX7 tubes function as voltage amplifier and driver, providing very high gain; 40 millivolts drives this unit to full output. This tremendous gain, plus an extremely high input impedance, make this amplifier perform exceptionally well with all types of ceramic and crystal pickups, as well as tuners, tape recorders, etc. Selenium rectifier power supply has extremely good regulation. For 3.2 or 8 ohm speakers. Tubes: 2-50C5, 2-12AX7 plus selenium rectifier. Size 9 1/2 x 5 1/2". For 110-120 volts, 60 cycle, AC. **Net 18.95**


### 5 WATT PUSH PULL AC-DC HI-FI AMPLIFIER KIT



**10.95**

- SEPARATE VOLUME, BASS & TREBLE CONTROLS
- PUSH-PULL AUDIO OUTPUT STAGE
- INVERSE FEEDBACK CIRCUIT
- AC OR DC OPERATION

Here in kit form is an AC-DC hi-fi amplifier that presents unusual features despite its amazingly low price. The separate bass and treble controls permit adjustment of both low and high frequency response and balance. Works equally well with both crystal or ceramic cartridges. Has a 4-tube line up—a 12AX7 amplifier and phase inverter, a 35W4 rectifier and a pair of 35C5's in push-pull, having a power-packed low distortion output. The circuit utilizes an inverse feedback loop to reduce the level of hum and distortion. Kit is complete containing all essential parts, tubes and detailed instruction manual showing pictorial and schematic diagrams. Shpg. wt., 4 lbs. **Net 10.95**



# Announcing THE SENSATIONAL LAFAYETTE TE-15 TUBE TESTER

## The Most Extraordinary Test Instrument Value We Have Ever Offered!



### COMPLETELY WIRED — NOT A KIT

Full Size  
9 3/4" W x 8 1/2" D x 2 3/8" H



• **Highly Accurate Easy-to-Read Meter with Replace—Good Scale**

• **Slide Out Tube Chart**

Exceptional  
Low Price

# 19<sup>95</sup>

- Accurately Checks Over 1000 Different Tubes
- Tests for Cathode Emission, Leakage and Shorts plus Filament Continuity
- Completely Portable—Weighs Only 6 lbs.
- Fast-Setting Slide Switches

An accurate, versatile, precision instrument that actually tests over 1000 different tubes. The low cost and superior performance of the Lafayette TE-15 Tube Tester combine to make it the outstanding test instrument value today. The ideal tube tester for any radio-TV serviceman, experimenter, technician, etc.

Highly dependable, the Lafayette TE-15 is equipped to test most of the tube types employed in Radio, Hi-Fi, Monochrome Color TV, etc. Sockets have been provided for 7-pin miniature, 9-pin miniature, octal base, octal base, noval and sub-miniature types. A special alligator clip lead is furnished for testing tubes with top caps. Slide switches are employed to connect the various tube elements to their respective test circuits. A 3-position tube slide-switch adjust for checking shorted elements, cathode emission and filament continuity. In conjunction with the leakage-quality switch a leakage indicator light is employed which glows when an inter-element short or leakage is present in a tube. A power switch turns the

unit on and additionally serves to adjust for various AC line voltages. Large easy-to-read meter calibrated 0-100 has a red-green "Replace—Good" scale, plus a special scale for checking diodes.

A handy slide out metal tray contains tube charts which facilitate rapid selection of test settings. Metal case is attractively finished in cream and steel gray. Completely portable—weighs only 6 lbs. and measures 8 1/2" D x 9 3/4" W x 2 3/8" H. Supplied with carrying case. For 105-125 volts, 60 cycle AC. Shpg. wt., 7 lbs. TE-15 Tube Tester Net 19.95

## NEW! POCKET AC-DC VOM

# 5<sup>95</sup>



• EXTREMELY COMPACT, MEASURES ONLY 3 7/8" x 2 1/8" x 1" • WEIGHS 5 OZS. • 1,000 OHMS PER VOLT SENSITIVITY • COMPLETELY WIRED (NOT A KIT) • 1% PRECISION RESISTORS • READS 0-1000 VOLTS AC-DC 0-100KΩ, 0-150 MA

Lafayette's new, pocket multimeter features small physical size, and a wide selection of useful ranges. It can be used for troubleshooting any type of electronic circuits or electrical appliances such as irons, lamps, radios, television, hi-fi equipment, etc. It is also useful for testing complex electrical circuits. Extreme portability allows unlimited usage either at home or in the field.

1000 ohms per volt sensitivity, and 1% precision resistor components assure accurate, precise readings. Operation is extremely easy, simply plug the leads into the desired scale, and you are ready to go, no switching or fidgeting required. Ranges: Volts: 0-15-150-1000 AC and DC Ohms: 0-100K MA: 0-150. The VOM comes completely wired and tested, and is enclosed in durable plastic case. All accessories including battery are rubber insulated, color coded, flexible test leads are supplied. TE-13 AC POCKET VOM Shpg. wt., 1 lb. Net 5.95

### 20,000 OHM PER VOLT

### MULTITESTER SEMI-KIT



*A New Kind of Kit*

THE DIFFICULT WORK IS ALREADY DONE

# ONLY 11.95

- 20,000 OHMS PER VOLT DC • 10,000 OHMS PER VOLT AC
- 40 MICROAMPERE 3" D'ARSONVAL METER MOVEMENT

The semi-kit is a new concept in test equipment kits. All the important or difficult parts are already mounted. All that remains to be done is to mount and wire in a few small parts—a job so simple you'll finish before you realize it, and best of all, you'll have one of the finest high sensitivity multimeters on the market. When used in a circuit, the high input resistance on all DC and AC ranges does away with the highly inaccurate readings common to low resistance testers which load the circuit. Ranges: DC Volts, 0-10-50-250-500-1000; AC Volts, 0-10-50-250-500-1000; DC CURRENT, 0-500 μa, 0-10-250 ma; OHMS, 0-10K-100K-1 meg; DECIBELS, —20 to —36; PLUS 0-5000 henries and 250 mfd. Black case 4 1/2 x 3 1/2 x 1 1/2. Complete with test leads, all parts, and instructions and battery. Shpg. wt., 3 lbs. Net 11.95

TK-10 KIT

## NEW! 20,000 OHMS PER VOLT MULTITESTER

3" METER with 2 COLOR SCALES



- 20,000 OHMS PER VOLT DC—10,000 OHMS PER VOLT AC
- 40 MICROAMPERE 3" D'ARSONVAL METER MOVEMENT
- HIGH INPUT RESISTANCE ON ALL DC AND AC RANGES

# 13.50

This new multitester has extra-luxury features, found in the most costly instruments. Easy visibility is provided by the large 3" meter with two color scales for easy visibility. The 40 micro-ampere meter movement permits a high input resistance on all ranges: 20,000 ohms per volt on DC; 10,000 ohms per volt on AC. This plus 1% tolerance resistors all the measuring of voltages without unduly loading the circuit, thus preserving accuracy of readings. Besides the extreme sensitivity and superior versatility of this instrument, it features ranges not found on other competitively priced VOM's. Measures 0-10-50-250-500-1000 DC volts, 0-10-50-250-500-1000 AC volts, 0-10K-100K-1 meg ohms, 0-500 microamperes, 0-10-250 milliamperes, —20 to +36 decibels, PLUS two special ranges 0-5000 henries inductance and 250 mfd to .02 mfd capacity. Employs one standard 1 1/2 v penlight battery. Size 3 1/2 x 5 1/2 x 1 7/8". Shpg. wt., 3 lbs. MODEL RW-60 Multimeter Net 13.50

## FILAMENT CONTINUITY TUBE CHECKER



# 1.69

Small and compact as a cigarette box. Quickly checks filament continuity in a matter of seconds. Ideal for the serviceman or the technician working in the field. Tests filaments of radio, TV picture tubes. Also can be used to test many other electrical devices and line cords, fuses, lamps and bulbs. Has sockets for TV picture tube and octal, octal, 9-pin, as well as 7-pin sockets. Provided with two test leads. Grey hammertone finish. Size 4 1/2 x 4 1/2". Shpg. wt., 12 oz. TE-11 Net 1.69

## NEW HIGH SENSITIVITY MULTITESTER

LARGE EASY-TO-READ METER



- 20,000 OHMS PER VOLT DC
- 10,000 OHMS PER VOLT AC
- RESISTANCE RANGE 0-60 MEGOHMS
- 40 μA MOVEMENT
- 1% RESISTORS
- 0-0.6 VOLT DC RANGE FOR AUDIO AND TRANSISTOR WORK
- COMPLETELY WIRED
- 28 RANGES

# 17.95

SINGLE KNOB SELECTOR

A new high quality, low-priced multitester. Its light weight makes it a perfect portable instrument for technicians, servicemen, etc. Rugged design withstands hard use. Features large easy-to-read meter and sensitive 40 microamp meter movement. 1% tolerance resistors provide extreme accuracy of measurements. Features zero-ohms knob adjustment provided. Positions permit easy operation. Reversed zero-ohms knob adjustment provided. Features sensitivity of 20,000 ohms per volt DC, and 10,000 ohms per volt AC. Ranges: DC volts: 0-0.6, 0-6, 0-30, 0-120, 0-600, 0-3000, 0-6000 volts. AC volts: 0-6, 0-30, 0-120, 0-600, 0-1200 volts. Resistance: RX1, RX100, RX1K, RX10K. DC current: 0-0.06, 0-6, 0-60, 0-600 ma. Decibels: —20 to —17 db — 0.774 V. Capacity: .0001-.01, .005-.20 mfd. Output ranges: 0-6, 0-30, 0-120, 0-600, 0-1200 volts. Complete with color coded heavy duty test probes and battery. Size: 6x3 1/2 x 1 3/4". Shpg. Wt., 1 1/2 lbs. Net 17.95

## NEW! 10,000 OHMS PER VOLT MULTITESTER

Outperforms Instruments Many Times Its Size

# 9<sup>95</sup>

EXTRA LARGE 3 1/2" METER FACE ALL ACCESSORIES INCLUDED

COMPLETELY WIRED NOT A KIT! FULL SCALE RANGES

DC VOLTS: 0-6, 0-30, 0-120, 0-600, 0-1200; AC VOLTS: 0-6, 0-30, 0-120, 0-600, 0-1200; DC CURRENT: 0-100 μa, 0-30, 0-300 ma; RESISTANCE: 0-30K, 0-3 MEG; DECIBELS: —20 to —36 in 3 scales; Capacity: 20 μf to 0.1 μf, and 0.01 μf to .1 μf; OUTPUT RANGES: 0-6, 0-30, 0-120, 0-600, 0-1200.

Unbelievable! Because Lafayette's new multitester is a complete factory wired and tested instrument (not a kit), it can be conveniently carried in the pocket, and features unusually sensitive 10,000 ohms per volt AC DC meter, 1% precision resistors, and the famous meter ever placed on an instrument of this size. Single easy-to-use rotary selector switch can be appreciated by the novice and the engineer alike. Case and panel are made of durable bakelite. First capacitor range requires 120 volts AC. Second range requires 6 volts AC. Probes and flexible leads are plastic coated and color coded. Size 4 1/2 x 3 1/2 x 1 1/2. Complete with leads and battery.

TE-10

Net 9.95

Plastic carrying case for TE-10. Shpg. wt., 8 lbs. Net 19.95

## SPECIAL SENIOR V.T.V.M. with 6 1/2" METER



Not a Kit... This is a completely wired and calibrated instrument

# 29.35

- 3% Accuracy of Full Scale
- Giant 6 1/2" Meter Face
- Direct Reading DB Scale

COMPARE THESE FEATURES

D.C. VOLTMETER: Ranges 0 to 3, 30, 150, 300, 1500 volts. Accuracy = 3% of full scale. Input resistance: 11 megohms. ZERO CENTER VOLTMETER for discriminator alignment: Ranges 0 to 1.5, 15, 75, 150, 750 volts. Accuracy = 3% of full scale. Input resistance: 11 megohms. AC VOLTMETER: RMS RANGE: 0 to 3, 30, 150, 300, 1500 volts. Peak to Peak Ranges: 0 to 8, 80, 400, 800 volts. Accuracy = 3% of full scale. OHMMETER: Ranges 0 to 1000 megohms (5 overlapping ranges). Center scale values: 10, 100, 1000, 100,000 ohms. 10 megohms. DECIBEL METER for all audio measurements: Ranges: —10 to +5, —0 to —25, —25 to +45 decibels. All bases on zero db. at 1.73 volts on 500 ohm line. Pilot light indicates when unit is "on." Complete with D.C. V.T.V.M. probe and cable plus pair of standard test leads. Housed in a rugged army high-impact case, with color matched etched aluminum panel and portable handle. Size: 5 1/2 x 7 1/2. TE-500 Shpg. wt., 6 lbs. 2.00 Down Net 29.35



# SENSATIONAL VALUES IN LAFAYETTE QUALITY METERS

**NEW!** Lafayette TM-26  
Illuminated Communications  
"S" Meter




**3<sup>95</sup>**

- Replaces Many Communications Receiver "S" Meters
- 2 Jewel Movement
- Clear Plastic Front
- Calibrated to S9 - 40db
- BIG BROTHER TO THE LAFAYETTE TM-11**

A new signal strength meter (basic 1 ma, 2 jewel movement) designed to replace many "S" meters used in communications receivers. Clear plastic front measures 2 1/2" square and meter title standard 2 1/8" round hole. Perfect for the experimenter and amateur. Complete with mounting screws, instructions for installation and use. Zero adjustment control on front panel. Shpg. wt. 1 lb. Net 3.95

**NEW! SQUARE PANEL METERS**



**3<sup>95</sup>**

- HIGH QUALITY D'ARSONVAL MOVEMENTS
- ACCURACY 2% OF FULL SCALE
- 3 1/2" SQ., ONLY 1 3/8" OVERALL BEHIND PANEL
- BAKELITE CASES • JEWELLED BEARINGS

**0-1 DC MILLIAMMETER**  
0-1 DC MILLIAMMETER—Sensitive, quick-acting basic movement. Linear calibrations in .02 ma. divisions. Black scale, red pointer. Black, Bakelite Front. Net 3.95  
TM-60

Lafayette MINIATURE ILLUMINATED VU METER



**3<sup>95</sup>**

- High Quality D'Arsonval Movement
- Accuracy 2% of Full Scale
- Jeweled Bearings
- Zero Adjust
- Wide-Angle Readability

This new miniature Lafayette vu meter features the quality on precision construction you'd expect to find on the most expensive meters and movements. A durable wrap around plastic front panel provides wide-angle readability. Zero adjustment screw is provided on the front panel. Accuracy is better than 2% of full scale. The unit is calibrated in the standard -20 to +3 vu and 0-100% ranges. Jeweled bearing movement employs precision carbon film multiplier resistor and full wave rectifier. Damped in accordance with standard vu meter requirements. Reference level 1 mw in 600 ohm line. 10,000 ohms internal resistance. 0 vu is 1.225 volts fine wave AC across meter connected to 600 ohm source with 600 ohm load. May be used with T pad attenuation, 0-100% scale used to indicate percent use of transmitter output. Size 1 1/2" H x 1 1/2" W x 1 1/2" D Shpg. wt. 4 oz. Net 3.95  
TM-10

**NEW LOW PRICE-**  
Lafayette MINIATURE ILLUMINATED "S" METER




**2.95**

- Jeweled Bearings
- Clear Plastic Front
- Accuracy 2% of Full Scale
- High Quality D'Arsonval Movement

Lafayette reduces its low price another 25%. Durable wrap around plastic front panel provides wide-angle readability. Zero adjustment screw on front panel. Jeweled bearing movement. Calibrated in "S" units from 0.9 with the scale terminating in .10 and .30 calibrations. Additional full scale calibrations of 0.5 and 0.10 in linear scale divisions. Silvered dial; black numerals and pointers. 1 3/8" dial face, 1 1/4" overall behind panel. Supplied with mounting screws. Shpg. wt., 8 oz. Net 2.95  
TM-11

**NEW! LAFAYETTE EDGE-WISE PANEL METERS**  
• PRECISION ENGINEERED • TOP VALUES

**AS LOW AS 5.69**



- 2% FULL SCALE ACCURACY
- PRECISION D'ARSONVAL MOVEMENTS
- FRONT PANEL AREA ONLY 3 1/2" x 1 1/2"

For use where panel space is limited. Requires about 1/2 the panel area of conventional 2 1/2" meters. Lightweight; only 10 ozs. Has precision D'Arsonval meters with 2% or better full scale accuracy. Front panel dimension is 3 1/2" x 1 1/2". Overall depth is 3 1/2" behind panel including terminals. Has stud-type solder terminals and zero adjustment screw. Shpg. wt., 3/4 lbs.

**VU METER**  
VU METER—Calibrated and damped in accordance with standard VU meter practice. Upper scale reads -20 to +3 VU. Lower scale reads 0-100% modulation. Accurate to ±0.5 VU from 30-15,000 cps. Net 5.95  
TM-23

**0-150 AC VOLTMETER**  
0-150 AC VOLTMETER—Full-wave bridge rectifier type. 1000 ohms per volt. 5 volts per division, linear scale. Net 5.69  
TM-22

**0-1 DC MILLIAMMETER**  
0-1 DC MILLIAMMETER—CALIBRATED from 0-1 ma in 0.02 ma. divisions. Black scale, red pointer. Net 5.69  
TM-21

LAFAYETTE MINIATURE DUO-REMOTE T.V. SPEAKER




**only 3.88**

- NOT ONLY AN EXCELLENT EXTENSION SPEAKER—ALSO PROVIDES REMOTE CONTROL VOLUME OF TV, RADIO, PHONO OR HI-FI
- ADJUST VOLUME OF YOUR FAVORITE PROGRAM FROM BED OR CHAIR
- MOUNT ON WALL OR USE ON DESK OR TABLE
- MAY BE USED WITH SET—ONLY MINUTES TO INSTALL

You will be amazed at the number of uses you'll find for this unit. The fine quality of the built-in speaker makes it perfect for use as an extension speaker anywhere in your home or office. Its small size makes it an ideal personal speaker when watching TV or listening to your phonograph. The dual volume controls provide independent volume control of the main speaker from your listening or viewing position or the remote's own self contained speaker. Attractive molded cabinet measures 4wx2 1/2"Hx1 3/4"D. Complete with 20 ft. of 4-conductor cable. Shpg. wt., 1 1/2 lbs. Net 3.88  
SX-145

**NEW! LAFAYETTE Miniature PANEL METERS**

**Sensationally Priced As Low As 3.75**



- D'ARSONVAL MOVEMENTS
- BAKELITE CASES • JEWELLED BEARINGS
- 1 1/2", AND 1 5/8" SQ. FACES, 1 1/4" OVERALL BEHIND PANEL • ACCURACY 2% OF FULL SCALE

**UNUSUALLY LOW PRICED FOR SUCH EXCELLENT QUALITY!** Ruggedly built miniature panel meters with excellent accuracy. Silvered dials and black numerals and pointers. Accuracy 2% of full scale. 1 1/2" square fronts, 1 1/2" overall front-to-back, with 1 1/4" behind panel including 1/4" terminals. Require 1 1/2" diameter round hole in panel, 4 corner holes with 1/4" center. Terminal polarity on DC models clearly marked. Zero adjustment screw on front of panel. Screw terminals. All have clear plastic front except which have black Bakelite. Clear plastic meters have 1 3/8" dial faces, supplied with mounted screws. Black Bakelite have 1 1/4" faces. Shpg. wt., 8 oz.

TM-400	0-1 DC	MILLIAMPERES	Net 3.75
TM-401 <td>0-5 DC</td> <td>MILLIAMPERES</td> <td>Net 3.75</td>	0-5 DC	MILLIAMPERES	Net 3.75
TM-402 <td>0-50 DC</td> <td>MILLIAMPERES</td> <td>Net 3.75</td>	0-50 DC	MILLIAMPERES	Net 3.75
TM-403 <td>0-100 DC</td> <td>MILLIAMPERES</td> <td>Net 3.75</td>	0-100 DC	MILLIAMPERES	Net 3.75
TM-200 <td>0-50 DC</td> <td>MICROAMPERES</td> <td>Net 4.95</td>	0-50 DC	MICROAMPERES	Net 4.95
TM-510*	50-0 50 DC	AMPERES	Net 3.95
TM-511*	0-10 DC	AMPERES	Net 3.95
TM-500*	0-5 RF	AMPERES	Net 3.95
TM-100	0-15 DC	VOLTS	Net 3.75
TM-101*	0-200 DC	VOLTS	Net 3.75
TM-300*	0-150 AC	VOLTS	Net 3.75
TM-301	0-300 AC	VOLTS	Net 3.75

**STEREO VU BALANCE METER**



**7.95**

- BALANCES STEREO SYSTEMS • TWO METERS IN ONE • ACCURATE TAPE RECORDER LEVEL INDICATOR

Ends the problem of balancing your stereo system. Two precisely damped loudness meters mounted at opposite ends of the meter assembly provide a continuous comparison of speaker levels. The scales are calibrated in "Volume Units" and percent. 1.2 volts input sensitivity for 0 VU or 100 percent indication. You can balance the entire system in one step. The special calibrating switch and 20 db attenuation controls permit exact matching of channels. It is the ideal recording level indicator for inexpensive stereo tape recorders, replacing the troublesome "magic eyes" or neon bulbs, and giving more accurate, more reliable readings. Safeguarded against burning out by two internal DC blocking capacitors. Greater than 8,000 ohm impedance permits connecting to output circuits without loading. The entire unit is housed in an attractive plastic case 3 1/2" x 1 7/8" x 5 7/8". Shpg. wt. 2 1/2 lbs. Net 7.95  
TM-40 STEREO BALANCE METER


**AUDIO OUTPUT VU LEVEL METER**



**5.95**

A level meter for monaural systems, this unit is calibrated in Volume Units and percentages in accordance with standard VU meter practice. Precise damping enables quick and accurate indication of the average level of all non-sinusoidal audio signals. It has a maximum sensitivity of 1.2 volts for 0 VU indication, with a built-in 20 db attenuation control. This meter has countless uses, its 8,300 ohm impedance being high enough not to load most circuits. It can be used for accurate level control of home hi-fi systems, especially where the amplifier feeds a remote loudspeaker. It is ideal as a consistently accurate recording level indicator to replace the clumsy "magic-eyes" and neon bulb of tape recorders; it indicates proper level in PA, paging and commercial music distribution systems. Housed in a compact plastic case 4 1/8" x 2 1/4" x 1 3/8". Shpg. wt., 2 lbs. Net 5.95  
TM-20 AUDIO OUTPUT LEVEL METER

**STEREO AUDIO ANALYST**  
Single Needle Dual Channel VU BALANCE METER




**11.95**

- UNIQUE TWO COIL GALVANOMETER TYPE PRECISION METER MOVEMENT
- SEVEN RANGES OF METER SENSITIVITY
- PROVISION FOR USE AS VU METER AND TAPE RECORDER LEVEL INDICATOR
- MAXIMUM METER SENSITIVITY 120 ua

Provides the solution to all stereo balancing problems. When both signals are equal and balanced the resultant deflection on the scale will measure 0. Individual channels may be measured by two slide switches. Stable meter action and protection from peak voltages is provided by special damping networks. Single seven-step range control serves for both channels and facilitates use of meter with all amplifier power levels. By properly positioning this control the movements may be used as VU meters when terminated across the 600-ohm load. The scales are calibrated in "Volume Units". Sensitivity is 1.2 volts for 0 vu or 100 percent indication. Finished in a rich satin gold. Overall size is 4 1/2" x 1 1/2" x 1 1/2" Hx4 1/2" W. Net 11.95  
TM-66 Audio Analyst

**NEW! SUB-MINIATURE TUNING & BATTERY METER**



FOR TRANSISTOR CIRCUITS ONLY 3/4 W x 7/8 H x 3/4" DEEP

**2.45**

Make your miniature transistor radio a deluxe receiver with this tuning and battery meter. Sensitive 300 u amp. D'Arsonval movement. Easy to read—clearly marked scale—red pointer. Meter has shielded case. Plastic bumpers protect pointer. With hook-up circuit. Scale marked: OFF, TUNE AND BATT. with intermediate graduations. Shpg. wt., 4 ozs. Net 2.45  
TM-18

**NEW! LAFAYETTE "BRASS-POUNDER'S" KEY**  
LAFAYETTE SPECIAL



**1.95**

- WITH BALL-BEARING PIVOTS
- SOLID POLISHED-BRASS BASE

A better quality precision-made key designed for hard usage. Spring tension and contact clearance adjustments. 3/4" silver contacts; adjustable ball-bearing pivots; Circuit closing switch. Base 3 1/2" overall size 5 1/2" x 1 1/2". Shpg. wt., 1 1/2 lbs. Net 1.95  
MS-428—Telegraph Key


**NEW! SEMI-AUTOMATIC "BUG"**  
SUPER SPEED TELEGRAPH KEY



**9.95**

Fully the equal of keys selling at almost twice the price! 7 adjustments for speed and comfort. Precision-tooled, anti-rust nickel-plated brass and stainless steel operating parts. Speed adjustable 10 wpm to as high as desired. 1/8" silver contacts; weight scale for reproducible speed settings. A real bargain for radio amateurs and professional CW operators! 6 7/8" x 3 3/4" x 2 1/4" H. exclusive of knobs and feet. Shpg. wt., 3 1/2 lbs. Net 9.95  
MS-438—Semi-Automatic Bug

**TELEGRAPH TRANSMITTER**  
And Code Practice Oscillator





Only 2.95  
2 for 4.90  
4 for 8.75

- Send and receive for miles on one wire!
- Ideal for Network Practice
- For Individuals, Group, Classrooms, Hams, etc.

An ideal communications instrument that can be set up with others for network practice in classrooms, groups, house to house, etc. Adjustable spring tension and contact clearance. Crystal earphone—high output—lightweight. Molded Bakelite base. Lightweight, only 6 oz. yet designed to give good stability while in use. Complete with 50 ft. of wire on reel, ground spike, ground wire, earphone and Morse code sheet. Uses 1.5V battery (not included). Overall 4 1/2" x 1 1/2" high. Shpg. wt. 1 lb. Net 2.95  
F-552 Telegraph Transmitter  
8A 157 Battery for above Net 1.13


**SPECIAL! METER RECTIFIER**



**.45**

A full wave, economical meter rectifier of exceptionally linear characteristics. Universal replacement for all multimeters, such as Lafayette's miniature V.O.M.'s. Single screw mount. Long terminals, 5 oz. Net .45  
RE-22

# REMARKABLE LAFAYETTE 3-STATION INTERCOM FEATURES PRIVATE STATION-TO-STATION CONTACTS!

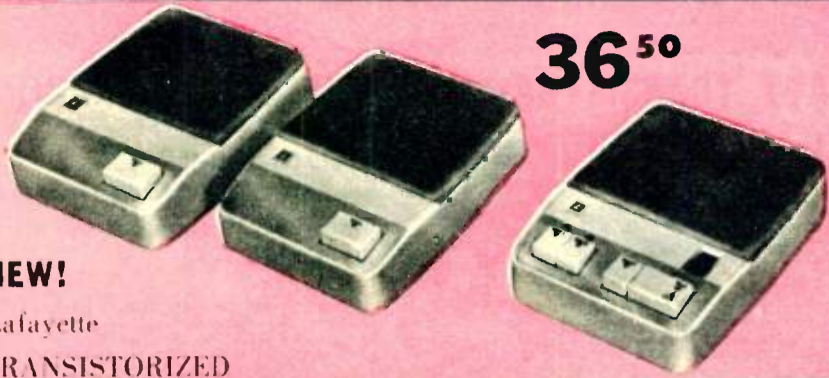

**36<sup>50</sup>**


**NEW!**  
Lafayette  
TRANSISTORIZED

INTERCOM SYSTEM

**FEATURES:**

- All-Transistor Printed Circuit
- True 3 Station System (PA-265)
- Small Size and Lightweight
- May Be Wall Mounted

For Home!  
Shop!  
Office!  
Factory!

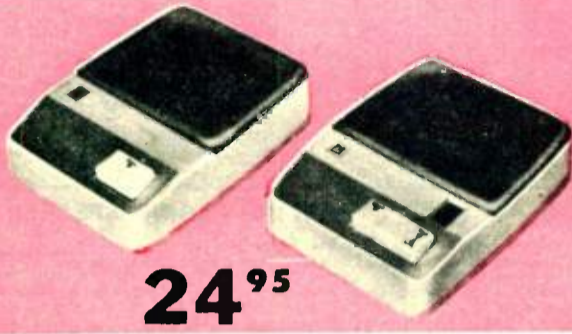

**24<sup>95</sup>**

Now have a deluxe 2 or 3 station system which is durable, versatile and very attractive too! Easy to operate with master unit—just push the press-to-talk button to speak and release it to listen. When talk is finished press Wait button. Remote unit to Master—just press Call button. In addition, the PA-265 is a true 3 station system; there is no call interference—each remote may be called separately, thus assuring privacy and less confusion. Three transistors in a rugged printed circuit and 3 1/4" speakers provide ample volume and low drain on

4-1.5 volt size C flashlight batteries (not included). Light in weight, units may be desk or wall mounted as desired. Plastic body is finished in gray and dark blue, styled to match any decor. Shpg. wt., 5 lbs. Size 1 1/4"H x 5"W x 6 3/4"D.

PA-264 2-Station Intercom	2.00 Down	Net 24.95
PA-265 3-Station Intercom	2.00 Down	Net 36.50
WR-12 100 Ft. 2 conductor wire		Net .89
WR-13 250 Ft. 2 conductor wire		Net 1.95
BA-156 Batteries for above—4 required		Net 13.6a

## NEW! LAFAYETTE 7 TRANSISTOR PORTABLE PHONO-RADIO

**39<sup>95</sup>**  
2.00 DOWN



**CONSIDER THESE OUTSTANDING FEATURES:**

- CORDLESS—SELF-POWERED ON BOTH RADIO AND PHONO
- OPERATES ON INEXPENSIVE D CELLS
- 7 TRANSISTORS, 1 DIODE, AND 1 THERMISTOR
- STURDY D.C. BRUSH MOTOR
- 3-SPEEDS, 33-1/3, 45, AND 78 PLUS A VARIABLE SPEED COMPENSATION CONTROL
- 2 TRANSISTOR AUDIO STAGE UP TO ONE WATT OUTPUT
- ATTRACTIVE CASE WITH HANDLE
- COMPACT AND PORTABLE—WEIGHS LESS THAN 10 LBS.



Now the pleasure of recorded music is yours anywhere—anytime. The new FS-225 PORTABLE RADIO-PHONO gives all the performance of a powerful 7 transistor radio plus a complete 3 speed phonograph. Operating on inexpensive D cell batteries, the FS-225 can be used anywhere. The sensitive radio section utilizes 7 transistors, 1 diode and 1 thermistor. The audio stage uses 2 transistors furnishing up to one watt output for both radio and phonograph. A super-sensitive ferrite-tuned antenna insures clear reception of broadcast stations. A clearly marked slide-rule dial makes tuning a breeze. The heart of the phonograph section is a husky three-speed D.C. Brush motor that

was designed for trouble-free service.—The exceptional power developed by this motor eliminates the drag and slowdown effects often found in portable phonographs. A variable speed compensation control permits fine adjustment of the phonograph speed to allow for battery wear. Comes complete with flip-over cartridge and 2 needles. CONTROLS: ON-OFF; Volume; Tuning; Phono-Radio Selector; Speed Selector—OFF—33 1/3, 45, 78; Speed Compensator. Comes in a distinctly styled three colored (pink, grey and black) portable case with a sturdy handle. Size: 9x13 1/4x5". Shpg. wt., 12 lbs. FS-225 less batteries 2.00 Down Net 39.95 BA-157 Burgess No. 2 (6 needed) Net ea. .13

### 2.39 LIGHTWEIGHT TRAVEL IRON

• Weighs Less Than 1 1/2 lbs.

- Handle Folds for Storage
- Chrome Plated



What a handy way to keep that neat, trim look while you travel and save on a costly valet service at the same time! The comfortable-grip handle folds away when not in use. Weighs less than 1 1/2 lbs.—easy to carry, easier to use. Includes a sturdy carrying bag and full length cord. Rated 250W., 110 120V. AC/DC. Measures 6 3/4 x 4 x 3" overall with handle up. Shpg. wt. 2 lbs.

AP-42 Travel Iron Net 2.39

### "Press-Ette" Travel Ironing Board

Made from sturdy Masonite, strong and warp-proof. Folding, Rubber-Tipped Legs raise board for ironing sleeves at the pointed end. Legs fold up for storage. Ideal for use near sewing machine to press new seams. Perfect to take on trips, in cars, trains or trailers, to hotels, motels or summer cottages. Fits easily into standard suitcases—stores easily in drawers or on shelves—handy for use in dormitories, small apartments or cramped quarters. One piece board measures 9" x 24" Shpg. wt. 2 lbs. Folding board measures 12" x 18" folded, 12" x 36" open. Shpg. wt. 4 lbs.

AP-43 One Piece Board Net 2.25  
AP-44 Folding Board Net 3.75

**Special Combination Offer**

AP-42 Travel Iron and AP-43 Press-Ette Board.

AP-45 Shpg. wt., 6 lbs. Net 4.14

## FAMOUS BRAND 2-STATION INTERCOM

**13<sup>95</sup>**

- SMART STYLING
- ALL-METAL CABINET
- 4" SPEAKERS
- CABLE SUPPLIED

New! Low cost intercom system that combines smart new styling with quality performance. A Lafayette special, this 2-Station intercom is a must for your home, store, or business office. Units come complete with 50 feet of interconnecting cable and will save you thousands of steps and needed energy. An additional remote station may be added if needed at very low cost. The Master unit has its own volume control with "on-off" switch. No switch is necessary on remote. Power consumption is only 29 watts. This set uses a 12AT7 Dual-triode amplifier plus a Selenium rectifier. 4" Alnico speakers are used in both Master and Remote. 110 Volts AC or DC. Measures only 6 1/2" x 4 1/2" x 4 1/2". Shpg. wt., 6 lbs.

PA-269 2-Station Intercom complete 2.00 Down Net 13.95  
PA-270 Extra Remote Station Net 5.83



### SAVE \$7.00 ON SUB-MINIATURE 4-TRANSISTOR HEARING AID

ONLY 2 1/2" LONG X 1 3/4" WIDE X 3/8" THICK

- LIGHTWEIGHT—WEIGHS LESS THAN 2 OZ. INCLUDING BATTERY
- SMALL ENOUGH TO BE CARRIED IN BREAST POCKET
- 4-POSITION TONE CONTROL
- UNIQUE TELEPHONE SWITCH ALLOWS TELEPHONE CONVERSATION
- LATEST ELECTRO-MAGNETIC EARPHONE AND MINIATURE CRYSTAL MICROPHONE
- UTILIZES ECONOMICAL PENLIGHT BATTERY

ORIGINALLY 29.50

**22<sup>50</sup>**

Lafayette's continued search at last has uncovered a hearing aid so small, so light, so powerful, as to make the owner and those around virtually unaware of its presence. Bound to open up a "new world" for those with even severe hearing loss. The extremely advanced circuit employs four high quality transistors, a special high performance crystal microphone along with 3 ft. thin plug-in colorless flexible cord and a unique magnetic earphone providing the clearest reception and sound reproduction yet achieved. All normal hearing functions are easily accomplished. . . . a special slide switch allows use of the instrument with an ordinary telephone. Proper tonal quality for every situation is provided by means of a 4-position control. Extremely simple to work with on-off and volume operated by a single control. Economical to operate requires only one small standard 1.5 volt battery which will provide power for two months when used at the rate of 4 hours daily. Encased in a sturdy, attractive, gold finished aluminum case—absolutely no danger of rust or peeling. Supplied complete with attractive leather carrying case, earphone and battery Shpg. wt., 1 lb.

F-480 2.00 Down Net 22.50

BATTERY FOR ABOVE BA-153 (1 required) Burgess N type Shpg. wt., 3 oz. .08

F-567 EXTRA PLUG-IN CORD FOR F-480 Net .55

F-568 EXTRA EARPHONE FOR F-480 Net 1.59



## NEW! INFRAPHONE

PROJECTS YOUR VOICE HUNDREDS OF YARDS ON AN INVISIBLE BEAM OF LIGHT

Developed by the solid State Physicists in one of our leading scientific laboratories.

INFRARED BEAM SPACE PHONE—AS DIRECTIONAL AS MICROWAVES



Absolutely Private — Tap-proof — Jam-proof — Scatter-proof Communication

- Utilizes the infrared detector principle used in the SIDEWINDER MISSILE and MIDAS SATELLITE
- Day or night • Use indoors or out
- Completely wireless transmitter and receiver! • Just Aim and Talk
- Ship-to-Shore, Air-to-Air, Car-to-Car, House-to-House, Plant Security, Police Work, Construction Crews, Hunters, Campers, Surveyors, Boy Scouts

The Infraphone uses the same principle of basic energy conversion for secret communications that will be used between space ships. The Infraphone changes sound waves into a voice modulated, invisible infra-red beam. A pair of Infraphones provides absolutely private, tap-proof, jam-proof, scatter-proof line-of-sight communication over a distance of 300 yds or more. Each unit consists of a printed circuit, transistorized transceiver. The transmitter section consists of a battery operated, filtered light source which emits the infrared beam and is modulated by a special, built-in microphone. Utilizing only ordinary flashlight batteries as power it is absolutely safe. Ready for instant use. May be tripod mounted or hand held. Housed in unbreakable, high impact styrene. Includes miniature earphone, batteries and instructions. Shpg. wt., 5 lbs.


**24<sup>50</sup>**  
Per Pair

AP-65W 2.00 Down Net, per pair 24.50  
BA-157 Replacement Battery, Burgess #2, 6 required Net ea. .13




# MICROPHONES *Fine Quality Save from 50% to 75% !!!* At History Making Prices!

• 2 Separate EXCLUSIVE OMNI-DIRECTIONAL PATTERNS 90° APART GIVING FULL 360° PICK UP.



Polar Pattern For PA-263

**NEW!**

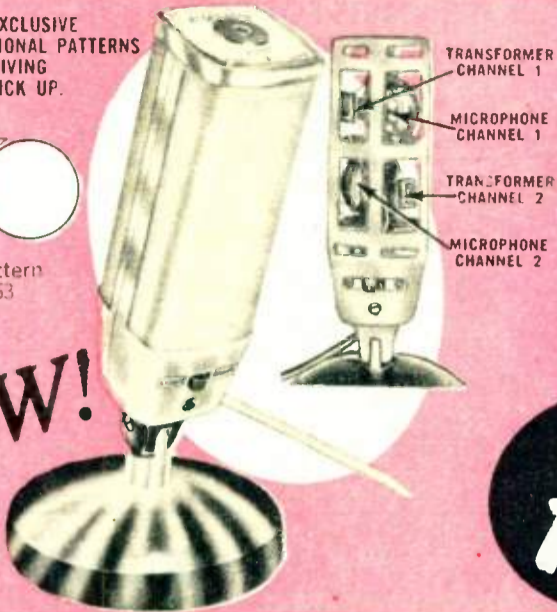

TRANSFORMER CHANNEL 1  
MICROPHONE CHANNEL 1  
TRANSFORMER CHANNEL 2  
MICROPHONE CHANNEL 2

## STEREO

## DYNAMIC MICROPHONE

LAFAYETTE Brings Quality to Stereo Sound Applications AT A PRICE YOU CAN AFFORD With The New Revolutionary STEREO DYNAMIC MICROPHONE

- Outstanding Performance Characteristics Compatible For Both STEREO and MONAURAL Operation
- IDEAL FOR TAPE RECORDING OF LARGE Orchestras, Band Concerts, Stage Plays, Small Musical Combos, and All Other Microphone Uses. • Excellent For Use With School Dramatic Groups. • SEPARATE SWITCH FOR EITHER MONAURAL OR STEREO OPERATION. • Satin Chrome-Plated, All-Metal Construction.

Lafayette offers a new, outstanding flexible stereo dynamic microphone. Designed by leading audio engineers, the PA-263 offers you outstanding performance at a price you can afford. Completely eliminates need for two mikes. Constructed and designed to obtain the optimum in stereo effect and monaural pick up. Also—excellent for pick up of "reverberation" for full dimensional sound. Mounted on top-ple-proof, heavily weighted, all metal base. Uses gland type swivel joint. Also—adaptable to all type floor stand mounts. Frequency response 50-15,000 cps. Practically flat 80-10,000 cps. Impedance 50K ohms. Polar Pattern—2 omnidirectional patterns 90° apart—comes complete with mike cable. Shpg. wt., 6 lbs. PA-263 Net 17.95

**ONLY 17.95**

**REMOTE MICROPHONE VOLUME CONTROL 1.76**

No more running to the P.A. amplifier to adjust volume. Now, control volume output right at the microphone. Attached between the microphone and the cable. Can be used at any desired distance. Fitted on one end with a female mike connector and male mike connector on the opposite end. Shpg. wt., 12 oz. MS-755 Remote Volume Control Net 1.76

**HIGH QUALITY TOP NOTCH CRYSTAL MICROPHONE 3.95**

COMPARE IT WITH ANY MIKE AT 2 TO 3 TIMES THE PRICE

Complete with Coiled Cord

Lafayette makes history with a high quality CRYSTAL MICROPHONE at a price that is 60% less than any comparable Crystal Microphone on the market today. Excellent for PA systems, home recorders and general applications. Frequency response 30 to 10,000 cycles. Output level—52 db. provides ample output for use with low gain amplifiers. Uses quality moisture sealed crystal. Die cast case in rich green baked enamel finish, with chrome grill. Completely equipped with 5 feet of Shielded cable. Mike may be used on any stand with 5/8"-27 thread. Grill diameter 2 3/4", depth 4 1/4", height 4 1/2". Shpg. wt., 3 1/2 lbs. PA-24 Net 3.95

**NEW DYNAMIC MICROPHONE WITH DESK STAND 9.75**

An UNUSUAL VALUE

• 40-13,000 CYCLES  
• DUAL IMPEDANCE—250 & 50,000 OHMS  
• EXTREMELY VERSATILE

A highly versatile dynamic microphone with smooth response from 40-13,000 cycles. Sturdy cast-metal tapering body, detachable triangular cast base has 360° ball-and-socket joint. Can be hand-held or used with desk or floor stand. Built-in external slide switch for high impedance (50,000 ohms) or low impedance (250 ohms). Output: —55 db = 3 db @ 1000 cps. Aquamarine. Size: (without stand) 5" long, 1 1/4" diam. barrel: (stand) 3 3/4" max diam 3/4" high Shpg. wt., 1 lb. PA-104 Net 9.75

**PUSH-TO-TALK CARBON MICROPHONE 6.95**

**NEW!**

- Retractable Coiled Cord
- Shaped to Fit Your Hand
- Convenient Push-To-Talk Switch
- Outstanding Performance at a Low Price

A hand-held microphone ideal for mobile communications. Designed to fit your hand comfortably with easy-to-reach, easy-to-use push-to-talk switch. Furnished with hanging bracket for convenient mounting. Sturdy plastic case. Frequency response: 200-4,000 cps. Low impedance. Shpg. wt., 1 lb. PA-262 Net 6.95

**3 WAY SLIM CRYSTAL MICROPHONE 3.95**

- May be hand-held, stand mounted or suspended by lavalier cord!
- RESPONSE 60-10,000 CPS
- ON-Off Switch

A tremendous value! Unique design, only 4 1/2"x1 1/4" diam. Comes complete with swivel adapter to fit all standard mike stands, and lavalier cord and bracket which leaves both hands free. Smooth wide range response. Locking type on-off slide switch. Detachable 7 ft. cable and connector. Shpg. wt., 2 lbs. PA-31 Singly Each 3.95

**NEW "DYNA-SLIM" MICROPHONE 6.95**

- HIGH IMPEDANCE—50,000 OHMS
- "QUICK-SLIP" ADAPTER
- ON-OFF SWITCH

New dynamic, high output microphone with all the features of "mikes" costing 3 times Lafayette's price! Output level —55 db. Smooth response from 60 to 10,000 cycles. Omnidirectional head. External on-off switch. Slips on or off stand adapter in a wink. Standard 5/8"-27 adapter permits tilting mike for multi-angle use. Satin black and chrome finish. Complete with detachable cable and connector. 8" long, 1 1/4" max. dia. tapered barrel 7". Shpg. wt., 2 lbs. PA-43 Net 6.95

**Lafayette SPECIAL VALUES! MIKE STAND 1.29**

Economical desk stand. Chrome plated; heavy cast base finished in gray wrinkle. 4 1/4" diam., 7" h. Felt pad; 5/8"-27 thread; adjustable collar. Shpg. wt., 2 lbs. PA-34 Net 1.29

**POPULAR MIKE CONNECTORS**

Standard single contact, cord mounted, nickel plated brass, knurl grips, 5/8"-27 thread.

MS-467 Female connector 22¢  
MS-468 Male connector 16¢

**ONLY 11.95**

**NEW! DUAL IMPEDANCE SLIM DYNAMIC MICROPHONE**

- RUGGEDLY CONSTRUCTED
- ON-OFF SWITCH
- 600 & 50,000 OHM IMPEDANCES SELECTED BY SIMPLE ROTATION OF PLUG

Beautiful, professional-looking dynamic with solidly-cast, tapered, slim case with satin-chrome finish. Heavy duty slide-type on-off switch. Built-in transformer supplies dual unbalanced impedances—low Z is 600 ohms, high Z is 50,000 Ohms. Swivel mount fits all standard 5/8"-27 threaded stands. Blast filter eliminates unpleasant "pops" with voice use. Omnidirectional when used vertically—cardioid pattern when tilted. Engineering design and finish are of the highest quality, making this microphone excellent for any application. Complete with 5 ft. plug-in cable. Shpg. wt., 2 1/2 lbs. PA-46 Net 11.95

**NEW! Lafayette ACCORDION MICROPHONE 5.95**

Amplify Your Accordion Through Electronics— Perfect for Large Halls, Audio Effects, Tape Recordings, etc.

- Supplied with Backstrap
- Easy-to-Install
- Tone and Volume Controls
- Ideal for Beginners and Professionals

Now accordion owners may enjoy all the advantages of electronic amplification previously limited to stringed instruments. The PA-101, coupled with an amplifier-speaker or P.A. system, provides flexibility impossible with an accordion alone. Makes possible greater volume for indoor and outdoor dances, concerts, assemblies, etc. Permits addition of circuitry for electronic "effects" (echo, vibrato, etc.). Alone, it provides a direct pickup for tape recording, eliminating the extraneous noise picked up by a conventional microphone. The heart of the PA-101 is an enclosed crystal pickup which mounts inside the accordion case. Also included are a case-mounted control bracket containing the volume and tone controls, an output jack, a 10 foot connecting cable complete with phone plugs on both ends, and installation instructions. Shpg. wt., PA-101 Net 5.95

**LAPEL MICROPHONE 1.95**

- Full—55 db. Output Level!
- Ideal General Purpose Mike

Ideal general purpose mike. Specially engineered crystal Microphone. Attaches to lapel. Only 1 1/4" in diameter. Exceptional frequency response. Output level —55 db. Chrome plated case and clip for attaching to lapel. Includes 5 ft. of shielded cable. Shpg. wt., 1 lb. PA-9 Net 1.95

**NEW! CRYSTAL THROAT MICROPHONE 1.95**

- HIGH SENSITIVITY—HIGH OUTPUT
- FOR USE WITH ANY AMPLIFIER OR TRANSMITTER WITH CRYSTAL MIKE INPUT
- IDEAL FOR AIRCRAFT, AMATEUR, INDUSTRIAL COMMUNICATIONS, AUCTIONS, PITCHMEN, CARNIVALS, SALESMEN
- COMPLETE WITH NECKSTRAP — LEAVES HANDS FREE!

A crystal throat microphone with a myriad of uses! Its high sensitivity and high output permits its use with any standard high impedance crystal microphone input. Its relatively wide frequency range provides a high degree of intelligibility for voice in public address or communications work. Requires no special power supply as do carbon-type throat mikes. Complete with flexible neckband and flexible 5 1/2' cable (less connector). Shpg. wt., 1/2 lb. PA-14 Net 1.95

**SMALLEST DYNAMIC MICROPHONE 2.95**

CLOSEOUT

- Only 3/8" W x 1/4" H x 1/4" D

Lafayette now presents this tiniest dynamic microphone, especially designed for miniaturized build-it-yourself semiconductor circuits, hearing aids, etc. About half the size of a postage stamp, this unit nevertheless has an output level of —75 db at 1000 cps and is ruggedly constructed. Impedance (1 kc): 800 ohms, case-to-winding resistance: greater than 10 meg. PA-222 Net 2.95

**NEW CONTACT MICROPHONE 1.95**

Easily Attaches to All String Instruments

This low priced, high quality contact microphone is ideal for amplification of single stringed instruments such as guitars, banjos, mandolins, cellos, ukeleles, etc. Provides rich, natural reproduction of the actual tone with sufficient amplification to be heard in a large hall. The clamp bar on the mike slides directly under the sounding board cutout to give a secure fit. Comes equipped with 8 ft. cable for connection to public address amplifiers, tape recorders or radios. Frequency response 40-9,000 cps. High impedance. Size: 1 1/2"x1 1/4" Wx3/8" D. Shpg. wt., 12 ozs. PA-41 Net 1.95

**ARGONNE ALL-PURPOSE DYNAMIC MICROPHONE 13.95**

- IDEAL FOR TAPE RECORDING, PAGING, COMMUNICATIONS
- DUAL IMPEDANCE—250 & 50,000 OHMS
- USABLE RESPONSE 50-18,000 CPS
- FOR HAND-HELD, DESK OR FLOOR STAND USE

Here is a flexible dynamic microphone with characteristics suitable for almost any application. Ruggedly constructed, with tapered cast-metal body and removable base for desk use. Mounts to the base by means of a 360° swivel adjustable ball joint and fitted with an adapter for standard 5/8"-27 floor stand. SPECIFICATIONS: FREQUENCY RESPONSE—Practically flat 80-10,000 cps; ± 5 db 70-13,000 cps. OUTPUT—70 db below 1 volt/microbar at 1,000 cps. DUAL IMPEDANCE: Low (250 ohms), High (50,000 ohms) unbalanced. Size 9" high (with base), 2" diam. at head, tapering down to 3/4". Base diam. 4 3/4", 1 3/4" high. Shpg. wt., 6 lbs. AR-3 Dynamic microphone, complete with base, floor stand adapter, and 8' cable Net 13.95







**FIX UP — TUNE UP**

with **LAFAYETTE ACCESSORIES**



**EXCLUSIVE**

**Lafayette f 2**

**ZOOM**

**8mm MOVIE CAMERA**

with **AUTOMATIC ELECTRIC EYE PHOTOMETER**



**ONLY 59.95**

- Follow Zoom action through lens coupled View finder
- Fast f2 Lens — Zooms from Wide Angle . . . to Normal . . . to Telephoto
- Built in coupled electric Photometer
- 4 Speeds — including Slow Motion
- Single Frame (animation) Exposure
- 5 film speeds — ASA 10 to 40
- Trigger Action Pistol Grip

You see exactly what the camera gets through the lens coupled viewfinder. Nothing can match a Zoom Movie Camera for unusual, dramatic effects and all-round versatility. You get needle sharp zoom pictures from Wide Angle through Normal to Telephoto. In focus down to 1 ft. The automatic electric photometer needle is visible in the viewfinder and cross-coupled to the shutter diaphragm. Just match the needle in the viewfinder for perfect exposure. Control for filter factor compensations. Calibrated for ASA 10-16-20-32 and 40 film speed. Four motor speeds for 12-16-24- and 32-frames-per-second. Plus single frame for animation. Fast, drop-in spool loading. Quiet, ratchet wind motor in a sturdy, die cast aluminum body. Trigger action, pistol grip handle and leather wrist strap included. Shpg. wt., 4 lbs.

F-689 Net 59.95  
F-648 Holster Case. Shpg. wt., 8 oz. Net 2.95

**PRICED EXTRA LOW! COMPARE FOR VALUE**

**ZOOM MOVIE OUTFIT**  
**COMPARE — for Value!**

★ Everything you need to take and show home movies!



**Only 99.95**

Complete ZOOM movie outfit contains all the equipment needed for success in taking and showing dramatic home movies. You get the exclusive Lafayette 8mm ZOOM movie camera (F-689), "Holiday" 500 watt projector (F-526), 30" x 40" folding tripod projection screen (F-536), bar light (F-537), two 300 watt photoflood lamps (F-539), two 400' reels and cans (F-538), holster type camera case (F-648) and one 25 ft. roll of Kodak movie film with processing included. Shpg. wt., 30 lbs. F-693X Net 99.95


Regular Catalog Price 120.45. YOU SAVE 20.50!

**LAFAYETTE "TINY" 6-TRANSISTOR RADIO**

**PLUS DIODE AND THERMISTOR**

**SENSATIONAL PERFORMANCE in a Small Package!**

- 6 Transistors Plus Germanium Diode and Thermistor
- Vest Pocket Size—Only 4Hx2½Wx1¼"D
- Earphone Jack Built in For Private Listening
- Full Tone Dynamic Speaker
- Trouble-Free Printed Circuit
- Built-In Ferrite Bar Antenna
- Superheterodyne Circuit
- Economical—Uses Only One Battery

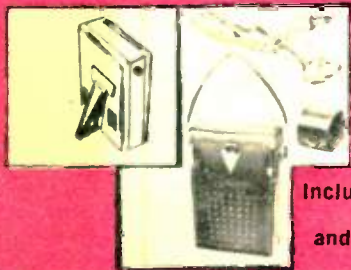

Including Earphone Battery and Carrying Case

**15.95**

Engineered and constructed with the jewel like precision of a fine watch . . . true superhet trouble free printed circuit with push pull audio output utilizes 6 ultra modern Transistors plus a Germanium Diode and Thermistor—achieves absolutely fantastic reception over the entire broadcast band. Requires only a single long-life 9 volt battery due to the exceptionally low battery drain. Smart black and gold case of rugged durable plastic. Soft leather carrying case with attached earphone pouch. Just 4Hx2½Wx1¼" thick

and weighs a mere 10 ounces. Includes battery carrying case and earphone for personal listening . . . all at an unbelievably low price! Shpg. wt., 2 lbs. FS-206 "Tiny" 6-Transistor Radio Net 15.95  
Extra Battery for FS-206. Burgess 2u6 type (1 required) Shpg. wt., 2 oz. BA-17a Net .85



**COMPLETE RANGE OF ACCESSORIES**

- AC ADAPTOR—Allows switching the RK-120 from battery operation to 115 v. 60 cycle AC. Has on/off switch plus pilot light. Shpg. wt., 2½ lbs. Net 9.95
- REMOTE CONTROL FOOT SWITCH—Starts and stops RK-120 instantly. Ideal for dictation. Shpg. wt., 1½ lbs. Net 4.75
- TELEPHONE PICK UP COIL—For recording telephone conversations. RK-121 Shpg. wt., 1 lb. Net 2.95
- PATCH CORD—Allows recording from radio, TV, phone, speaker. RK-124 Shpg. wt., ½ lb. Net .85
- 3" REEL 300 Ft. 4½ Mil Mylar Tape. Shpg. wt., ½ lb. RT-20 Net .63
- BATTERIES—The RK-120 requires 6 standard "Z" cells. Shpg. wt., 4 oz. BA-155 Net ea. .13

**LAFAYETTE RADIO**  
165-08 LIBERTY AVENUE,  
JAMAICA 33, N. Y.

**BULK RATE U. S. POSTAGE PAID**  
New York, N. Y.  
Permit No. 8486

**TUVWX YZABC**

# Lafayette NEW! EASY PAY PLAN TERMS... Makes it Even Easier for YOU to BUY NOW

IT'S SIMPLE TO OPEN AN ACCOUNT —  
CHOOSE EITHER STANDARD OR EXTENDED TERMS

**ON ORDERS  
AS LOW  
AS \$20!**

Take Advantage of these new EASY PAY Features TODAY

## NO DOWN PAYMENT REQUIRED

No money down when you buy with Lafayette's new Easy-Pay Plan.

- ★ **Longer Repayment Period**  
New Optional Extended Easy Pay Terms permit payments up to 24 months.
- ★ **It's Easy To Open A Lafayette Account**  
Fast — Economical — Confidential
- ★ **Immediate Handling**  
Orders shipped immediately upon approval of credit
- ★ **Simplified "Add-On" Purchases**  
No Down Payment For "Add-On" Purchases

Lafayette's Easy Pay Plan enables you to order on new easier terms the equipment you want now even if you are short of ready cash. This sensible plan permits you to pay out of future earnings—and at the lowest carrying charges! You can buy whatever you please under this plan, including High Fidelity Systems; individual Hi-Fi units and accessories; Test Equipment; Kits; Public Address and Intercom Equipment; Amateur Gear; Photographic Equipment; Books and Manuals; etc. All merchandise for personal use, to be kept at your own address, is eligible for EASY PAY privileges. (NOT ELIGIBLE are PRE-RECORDED TAPES, RECORDS and items intended for RESALE.)

## TERMS OF LAFAYETTE'S NEW EASY PAY PLAN NO DOWN PAYMENT

When you open your Lafayette Easy-Pay Account, you can make your purchase with **NO MONEY DOWN**. DISREGARD ALL DOWN PAYMENTS SHOWN IN THIS BOOK!

**Minimum Order . . . .** Orders must have a total cash value of **\$20.00** or more.

**Service Charge:** You may choose either the Standard or the Extended plan to obtain the lowest service charges for the greatest length of time.

**Monthly Payments:** You can make your monthly payments under Standard or Extended terms shown in the new easy payment table. The extended terms permit smaller monthly payments over a larger period, up to 24 months. When ordering, please indicate in the space provided on the order blank, your choice of standard or extended terms.

## HOW to BUY on NEW EASY TERMS

To order the merchandise you want to buy on Easy Terms, use your Lafayette order blank. Turn to the reverse side and fill in the contract, using the example shown as a guide. Use the amounts shown in the EASY PAY PLAN SCHEDULE for either the STANDARD or the EXTENDED terms, depending upon which terms you are choosing. If delivery is to be made in New York City, fill in space indicating sales tax. Supply the answers to all the questions below the contract, which must be filled in correctly and signed before we can process your order. Be sure to give complete names and addresses of all references you list. Attach the remittance covering your down payment, and mail your order. As soon as your credit is approved, your order will be shipped. Your first payment is not due until 30 days after shipment. Lafayette has made this plan as simple and confidential as possible. **NO RED TAPE.** Any responsible person over 21 years old, with a regular source of income, can apply. EASY PAY privileges are available to residents of the United States, U. S. Territories, Puerto Rico and Canada, where payment of collect transportation charges is possible. It does not apply to other points or countries.

## REFUND OF SERVICE CHARGES FOR ADVANCED PAYMENT

All credit service charges will be refunded if payment is completed within 60 days of shipment. Take the full time to pay if you wish. However, you may pay off your account at any time and obtain a partial refund of the credit service charge.

## ADDITIONAL PURCHASES

Once you have established credit with Lafayette, additional orders between \$20 and \$100 may be placed **WITHOUT DEPOSIT**. If your present account has a small balance, the new order will be given another EP# and they will be treated as two separate accounts. If your present account still has a balance of more than \$50, or if your new order is for more than \$50, the new order may be combined with the present balance and paid in one installment monthly under one account number. If you wish them combined, simply write "combine with EP# \_\_\_\_\_," and write in your present EP#.

CUT ALONG DOTTED LINE

## RETAIL INSTALLMENT CONTRACT

**MINIMUM ORDER \$20.00 TOTAL CASH PRICE —  
NO DOWN PAYMENT**

No money down when you buy with Lafayette's new Easy-Pay Plan.

**ADDITIONAL PURCHASES:** Once you establish credit, you can "add-on" to your account with purchases of \$20.00 or more. No down payment required on "add-ons" or reopened accounts for less than \$100.00. Just list the items you want on the order blank, write "add to my account," and give your account number. Make certain you sign the Easy Payment Agreement.

**NOTICE TO THE BUYER:** 1. Do not sign this agreement before you read it or if it contains any blank space. 2. You are entitled to a completely filled in copy of this agreement. 3. Under the law, you have the right to pay off in advance the full amount due and under certain conditions to obtain a partial refund of the credit service charge.

**LAFAYETTE RADIO ELECTRONICS CORPORATION (SELLER)**  
165-08 LIBERTY AVE. JAMAICA 33, N. Y.

seals and buyer purchases merchandise as described on reverse side hereof to be kept in good repair and unencumbered at buyer's stated address. Seller shall retain title and right to possession of merchandise until fully paid. The unpaid balance of this order together with applicable credit service charge, may be added to an existing unpaid account for convenience of both buyer and seller. Should the buyer place subsequent orders unpaid balances on such orders may be combined with any balance owing on this order together with applicable credit service charge, if buyer so authorizes and seller accepts in appropriate spaces elsewhere in this contract. Upon default of any payment or payments seller may declare entire unpaid balance due at once and may also repossess merchandise retaining previous payments as compensation for the use thereof. If proceeds of resale of merchandise are insufficient to cover buyer's obligation, buyer will pay the deficiency to seller; if proceeds result in overage, seller will pay such overage to buyer. Payments will be made to the place and/or to any party designated by the seller in writing.

**LAFAYETTE RADIO ELECTRONICS CORPORATION (SELLER)**

By \_\_\_\_\_  
BUYER SIGN HERE  
Signed \_\_\_\_\_

## RETAIL INSTALLMENT CONTRACT

(L.S.) DATE

To combine additional purchase with a previous account, indicate

Combined Am't. you wish to pay monthly \$

UNPAID BALANCE \$

PRESENT ACCT. = EP

## NEW "EASY PAY PLAN" PAYMENT SCHEDULE

If Unpaid Balance Is	Standard Terms		Extended Terms	
	Monthly Payment	Credit Service Charge	Monthly Payment	Credit Service Charge
UP to 20.00	2.00	5.00	5.00	11.00
20.01 - 30.00	3.00	5.00	10.00	11.00
30.01 - 40.00	4.00	5.00	10.00	12.00
40.01 - 50.00	5.00	5.00	11.00	13.00
50.01 - 60.00	6.00	5.00	12.00	14.00
60.01 - 70.00	7.00	5.00	12.00	15.00
70.01 - 80.00	8.00	5.00	13.00	16.00
80.01 - 90.00	9.00	5.00	14.00	17.00
90.01 - 100.00	10.00	5.00	15.00	18.00
			16.00	19.00
			17.00	20.00
			18.00	21.00
			19.00	22.00
			20.00	23.00
			21.00	24.00
			22.00	25.00
			23.00	26.00
			24.00	27.00
			25.00	28.00
			26.00	29.00
			27.00	30.00
			28.00	31.00
			29.00	32.00
			30.00	33.00
			31.00	34.00
			32.00	35.00
			33.00	36.00
			34.00	37.00
			35.00	38.00
			36.00	39.00
			37.00	40.00
			38.00	41.00
			39.00	42.00
			40.00	43.00
			41.00	44.00
			42.00	45.00
			43.00	46.00
			44.00	47.00
			45.00	48.00
			46.00	49.00
			47.00	50.00
			48.00	51.00
			49.00	52.00
			50.00	53.00
			51.00	54.00
			52.00	55.00
			53.00	56.00
			54.00	57.00
			55.00	58.00
			56.00	59.00
			57.00	60.00
			58.00	61.00
			59.00	62.00
			60.00	63.00
			61.00	64.00
			62.00	65.00
			63.00	66.00
			64.00	67.00
			65.00	68.00
			66.00	69.00
			67.00	70.00
			68.00	71.00
			69.00	72.00
			70.00	73.00
			71.00	74.00
			72.00	75.00

For purpose of receiving credit for above EASY PAY PLAN purchase, the buyer makes the following representation:

With Parents Landlord's Name and Spouse Name and Living Alone Address

Home Address (Check Permanent or Previous which) (Address) (City) (State) (Zip)

Age \_\_\_\_\_ Single \_\_\_\_\_ Married \_\_\_\_\_ Divorced \_\_\_\_\_ Spouse Employed By \_\_\_\_\_

Draft Classification \_\_\_\_\_ Reserve Status \_\_\_\_\_ Have you bought from Lafayette before? Yes  No  On Time Payment? Yes  No  If yes, please give your Lafayette Time Payment Account Number. No. \_\_\_\_\_

Real Estate Holdings—Address \_\_\_\_\_ City \_\_\_\_\_ State \_\_\_\_\_

Recorded In Name of \_\_\_\_\_ Present Value \$ \_\_\_\_\_ Mortgage \$ \_\_\_\_\_

Name \_\_\_\_\_ Position \_\_\_\_\_ Salary \_\_\_\_\_ (City and State) \_\_\_\_\_ (Months) \_\_\_\_\_

Employer \_\_\_\_\_ Any Other Income \_\_\_\_\_ Source \_\_\_\_\_ (City and State) \_\_\_\_\_ (Months) \_\_\_\_\_

Business Address \_\_\_\_\_ (Address) \_\_\_\_\_ (City and State) \_\_\_\_\_ (Zip) \_\_\_\_\_

Name \_\_\_\_\_ Former Employer \_\_\_\_\_ (Address) \_\_\_\_\_ (City and State) \_\_\_\_\_ (Zip) \_\_\_\_\_

Bank Account With \_\_\_\_\_ Savings  Checking  (Address) \_\_\_\_\_ (City and State) \_\_\_\_\_ (Zip) \_\_\_\_\_

First Trade Reference \_\_\_\_\_ (Name) \_\_\_\_\_ (Address) \_\_\_\_\_ (City and State) \_\_\_\_\_ (Zip) \_\_\_\_\_

Second Trade Reference \_\_\_\_\_ (Name) \_\_\_\_\_ (Address) \_\_\_\_\_ (City and State) \_\_\_\_\_ (Zip) \_\_\_\_\_

Third Trade Reference \_\_\_\_\_ (Name) \_\_\_\_\_ (Address) \_\_\_\_\_ (City and State) \_\_\_\_\_ (Zip) \_\_\_\_\_

Nearest Relative \_\_\_\_\_ (Name) \_\_\_\_\_ (Address) \_\_\_\_\_ (City and State) \_\_\_\_\_ (Zip) \_\_\_\_\_

Highest Credit \$ \_\_\_\_\_ Still Owning \$ \_\_\_\_\_ Monthly Payment \$ \_\_\_\_\_

Highest Credit \$ \_\_\_\_\_ Still Owning \$ \_\_\_\_\_ Monthly Payment \$ \_\_\_\_\_

Highest Credit \$ \_\_\_\_\_ Still Owning \$ \_\_\_\_\_ Monthly Payment \$ \_\_\_\_\_

# Guarantee

## LAFAYETTE GUARANTEES YOU 100% SATISFACTION OR YOUR MONEY BACK

Order with confidence from Lafayette — you must be completely satisfied or your money back in 15 days.

You buy with confidence because you try your purchase at home for 15 days. If you decide to return it within that time for any reason, the full purchase price will be refunded to you, less only the transportation charges. Material including unwired kits must be returned in good condition and unwired. Lafayette guarantees you complete satisfaction. Manufacturers' guarantees give you added protection for many more months. Lafayette does not sell merchandise not covered by manufacturer guarantees.

### KITS:

All parts are warranted to be free from defects and will be replaced at no charge for one year from date purchased. Kits fully wired by purchaser may be returned for inspection and repair at a moderate charge.

### LOWEST NET PRICES:

The prices listed in this catalog are the lowest net prices at the time of printing. If the price of any item is reduced after the catalog is printed, we will fill your order at the lowest price at time of purchase and refund the difference. **WE GUARANTEE YOU ALWAYS PAY THE LOWEST LAFAYETTE PRICE.**

### 24 HOUR SERVICE:

Quick, courteous service is another daily guarantee at Lafayette. Most orders are fully processed within 24 hours after receipt in our Mail Order Division.

### EASY-PAY PLAN:


It's simple to open an account — choose either standard or extended terms on orders as low as \$20. No down payment, up to 24 months to pay. No down payment for "Add-On" purchases.

# Save Over 50%

## 6 TRANSISTOR SUPERHET RECEIVER WITH LATEST NPN-PNP TRANSISTORS

**SPECIAL SUMMER SALE PRICE 13.95**  
Reg. 29.45

- GE 2N188A AUDIO OUTPUT TRANSISTORS
- 100% SUBMINIATURE PARTS — NO COMPROMISES!
- LABORATORY DESIGNED — SENSITIVE, SELECTIVE, STABLE!
- CLASS B PUSH-PULL AMPLIFICATION — PLENTY OF POWER
- FOR GROUP AND PRIVATE LISTENING
- NEW 28 PAGE INSTRUCTION MANUAL



Superb Performance!


- INCLUDING LEATHER CARRYING CASE WITH STRAP



Quantities Limited

KT-162 Complete Kit - Less Battery Net 13.95  
BA-180 Battery 9V Burgess 2N6 Net 1.30  
MS-591 Sensitive matching earphone Net .79

**FOR GROUP AND PRIVATE LISTENING**  
Transistor-wise Lafayette proudly presents its newly revised 6 Transistor Superhet Receiver Kit. This improved model uses the latest GE NPN-PNP Transistors in an ingeniously engineered, laboratory tested circuit providing superb performance and an amazing superior commercial quality. The circuit features a specially matched set of 3 IF transformers, Oscillator Coil, High-Q Loop, Class B Push-Pull Audio Amplification and optimum Transformer Coupling in audio and output stages. Has efficient 2 3/4" speaker for exemplary reproduction and earphone jack for private listening. Sturdy, attractive brown leather case with carrying strap. Complete with all parts, transistors, pre-punched chassis, but less battery. New 28 page easy-to-follow step-by-step instruction book. Size 6x3 1/2x1 1/2". Shpg. wt., 4 lbs.

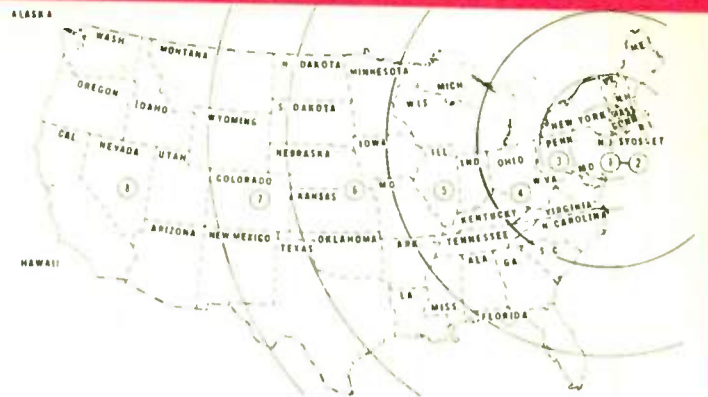

### PARCEL POST RATES FOR ALL ZONES

Subject to post office rate changes

SHIPPING WEIGHT	ZONES							
	Local	1-2 up to 150 Miles	3 151 to 300 Miles	4 301 to 600 Miles	5 601 to 1,000 Miles	6 1,001 to 1,400 Miles	7 1,401 to 1,800 Miles	8 Over 1,800 Miles
Up to but not including 16 ozs.		3c for the first 2 ounces and 1 1/2c for each additional ounce						
to 2 lbs.	\$0.24	\$0.33	\$0.35	\$0.39	\$0.45	\$0.51	\$0.58	\$0.64
3	.26	.38	.41	.47	.55	.64	.74	.83
4	.28	.43	.47	.55	.65	.77	.90	1.02
5	.30	.48	.53	.63	.75	.90	1.06	1.21
6	.32	.53	.59	.70	.85	1.03	1.22	1.40
7	.34	.58	.65	.77	.95	1.16	1.38	1.59
8	.36	.63	.71	.84	1.05	1.29	1.54	1.78
9	.38	.68	.77	.91	1.15	1.42	1.70	1.97
10	.40	.73	.83	.98	1.25	1.55	1.86	2.16
11	.42	.77	.89	1.05	1.35	1.67	2.02	2.34
12	.44	.81	.95	1.12	1.45	1.79	2.18	2.52
13	.46	.85	1.01	1.19	1.55	1.91	2.34	2.70
14	.48	.89	1.07	1.26	1.65	2.03	2.50	2.88
15	.50	.93	1.13	1.33	1.75	2.15	2.66	3.06
16	.52	.97	1.18	1.40	1.85	2.27	2.81	3.24
17	.54	1.01	1.23	1.47	1.95	2.39	2.96	3.42
18	.56	1.05	1.28	1.54	2.05	2.51	3.11	3.60
19	.58	1.09	1.33	1.61	2.15	2.63	3.26	3.78
20	.60	1.13	1.38	1.68	2.25	2.75	3.41	3.96
FOR EA. ADDED LB. ADD 2c	4c	5c	7c	9c	12c	15c	18c	

### PARCEL POST HANDLING CHARGES

up to 5.00	.05	10.01 to 25.00	.15
5.01 to 10.00	.10	25.01 to 50.00	.20

## USE THE LAFAYETTE EASY-PAYMENT PLAN — FOR YOUR CONVENIENCE, CUT ALONG DOTTED LINE

TUVWX  
YZABC

**TERMS:**  
The prices listed in our catalog are net. All trade and cash discounts have already been deducted.  
All prices are net F.O.B. shipping point. Prices are subject to change without notice.  
Express or freight charges should not be sent with order (they are collected upon delivery).  
Parcel post charges should be included with fully paid orders. We refund ours, not used.

**THREE WAYS TO BUY**  
Enter Amount Enclosed  
**FULLY PAID ORDER** \$  
(Enclose full amount including postage and sales tax, if any).  
**DEPOSIT, BALANCE C.O.D.** \$  
(We advise ordering for amounts less than \$5.00).  
**EASY PAYMENT ORDER** \$  
Regular Terms  Extended Terms   
Down Payment \$

615

**DO NOT USE**

TOTAL FOR GOODS	LBS	Total Oz
AMOUNT FOR SALES TAX (if any)		
SHIPPING HANDLING CHARGES (We refund any not used)		
AMOUNT DUE LAFAYETTE FROM PREVIOUS ORDER		
TOTAL AMOUNT		

**IMPORANT**—Any correspondence not connected directly with the order should be written on a separate full size letter. This will speed handling of both order and letter.

DO NOT USE	STOCK NUMBER	PAGE NO.	QUANTITY DESIRED	DO NOT USE	DESCRIPTION	PRICE Ea. Lot etc.	TOTAL PRICE DOLLARS CENTS	SHIPPING WEIGHT LBS OZ
					SHOW MANUFACTURER'S NAME WHENEVER POSSIBLE			

PLEASE PRINT OR WRITE PLAINLY

NAME (First Name) (Middle Initial) (Last Name)  
STREET ADDRESS (Include Apt. No.)  
TOWN STATE POSTAL ZONE

SHIP TO ANOTHER ADDRESS? GIVE DIRECTIONS HERE

NAME (PLEASE SPECIFY)  
BULKY OR DELICATE ITEMS SUCH AS TUNERS, CHANGERS, AMPLIFIERS, ETC. ARE SHIPPED EXPRESS. THE LETTER 'X' IS ADDED TO THE STOCK NUMBER OF THESE ITEMS.

HOW SHALL WE SHIP?  
PARCEL POST  
EXPRESS  
FREIGHT  
OTHER

IF YOU HAVE MOVED SINCE LAST ORDER GIVE OLD ADDRESS HERE.  
STREET  
TOWN STATE

DATE

PLEASE PRINT OR WRITE PLAINLY

**LAFAYETTE RADIO**  
ELECTRONICS CORPORATION  
*World's Foremost Supplier of Electronic Components*  
165-08 LIBERTY AVENUE • JAMAICA 33, NEW YORK

TELEPHONE: AXiel 1-7000  
CABLE ADDRESS: LAFRADLEC


(FOR EASY PAYMENT ORDERS — USE INK — SEE REVERSE SIDE)

ORDER BLANK

# LAFAYETTE "ELECTRIK 2.8" AUTOMATIC ELECTRIC EYE 35 m.m. CAMERA

## AUTOMATIC EXPOSURE CONTROL—UNBEATABLE PRICE

PRICED EXTRA LOW!  
**COMPARE FOR VALUE**

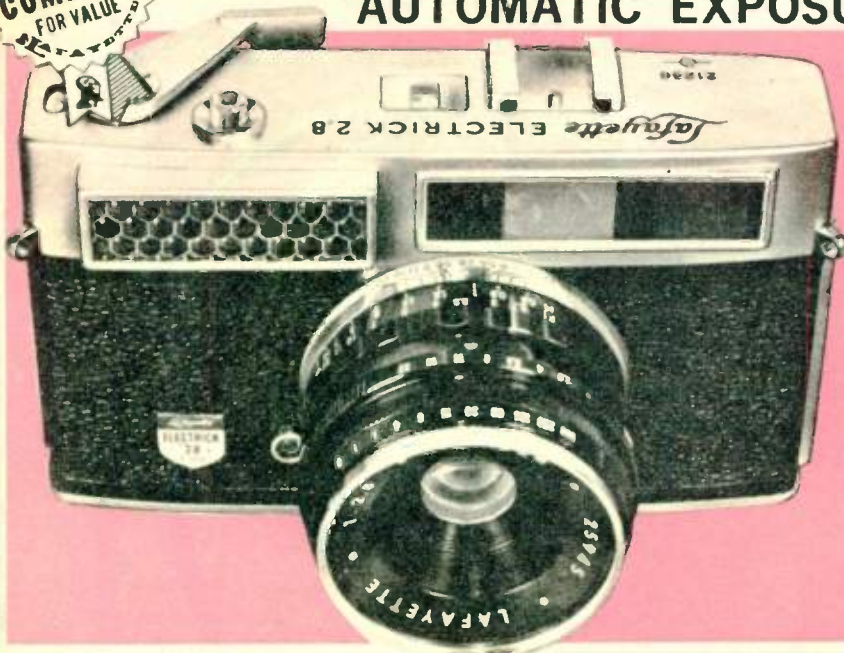

- ★ Coupled Range Finder
- ★ Match-The-Pointer, Focus and Shoot!
- Photoelectric Meter—for "Picture Perfect" Exposure
- Needle Sharp Hard Coated f2.8 lens
- Automatic Parallax Correction
- 11 Shutter Speeds from 1 sec. to 1/500
- ★ Built-In Photoelectric Exposure Meter
- ★ Cross-Coupled Shutter and Diaphragm
- Bright Line Viewfinder
- MX Flash Synchronization!
- Double Exposure Prevention!
- Built-in Self Timer

**NEW LOW PRICE !!**  
**49<sup>95</sup>**

2.00 Down **less case**

Lafayette's new "Elektrik 2.8" offers, at a moderate price, the quality, features, and smoothness of operation of cameras costing several times more. Built to Lafayette's rigid specifications, the "Elektrik 2.8" guarantees roll after roll of magnificent color slides and razor-sharp black and whites. Perfect exposure every time is assured by the cross-coupled photoelectric exposure meter: merely set desired shutter speed and ASA film speed, aim camera at subject and adjust lens aperture until light meter needle lines up with colored mark on meter scale. Now any adjustment of shutter speed will cause a corresponding adjustment of lens opening to maintain the proper speed/f-stop ratio for a particular lighting condition (lens opening may also be controlled independently). Superimposed coupled range finder with automatic parallax correction enables accurate focusing from 2.5 ft. to infinity on the fast f2.8 coated anastigmat lens. Copal SV shutter features speeds from a full second to 1/500, MX flash synchronization, and a self timer. Fast-action film advance cocks shutter, advances film, and counts exposure. Accepts 20 or 36 exposure 35mm film, color or black-and-white. Shpg. wt., 3 lbs. Use series 7 accessories.

F-655 Less Case 2.00 Down Net 49.95  
F-656 Leather Eveready Case. Shpg. wt., ½ lb. Net 4.95

### "RANGEFINDER II" — LOW COST VERSATILITY

- 4 ELEMENT F2.8 COATED LENS!
- COUPLED RANGEFINDER



Less Case  
Exposure meter illustrated not included.

- ✓ BRILLIANT COMBINED VIEW-RANGE FINDER!
- ✓ SINGLE STROKE RAPID FILM TRANSPORT!
- ✓ NINE SHUTTER SPEEDS TO 1/300!
- ✓ MX SYNCHRONIZATION
- ✓ F2.8 45mm COATED LENS!
- ✓ HI-SPEED REWIND!
- ✓ BUILT-IN SELF TIMER!
- ✓ STANDARD PC FLASH TERMINAL!
- ✓ DOUBLE EXPOSURE PREVENTION

**29.95** 2.00 Down

Check the features—then compare Lafayette's price with any other brand. Fast f2.8 coated anastigmat lens and extra-wide lens aperture for brilliant, sharper full color or black and white even in poor light. Sight and focus through combined range-view finder. Fully synchronized at all speeds for class M and electronic flash. Speeds from 1 sec. to 1/300th. Rapid advance sets shutter, counts exposure and transports film. Built-in delayed action timer—automatic exposure counter and film stop. Hi-speed rewind with folding lever. Standard accessory shoe. All metal body with brushed chrome trim—black leatherette covering. 20 or 36 exposures on black and white or color 35mm film. PC flash terminal. Shpg. wt., 3 lbs. Use series 6 accessories.

F-485 Less Case and Exposure Meter Net 29.95  
F-486 Leather Eveready Case. Shpg. wt., ½ lb. Net 3.95  
F-351 Clip-on Exposure Meter. Shpg. wt., ½ lb. Net 3.95  
Special Combination Offer: Includes camera above—Eveready case—folding BC flash gun—and clip-on exposure meter. Shpg. wt., 4 lbs. Net 38.95  
2.00 Down

### AUXILIARY LENSES

For F-485 "RANGEFINDER II"

- TELEPHOTO — TWICE AS CLOSE!
- WIDE ANGLE — 75% MORE
- CLOSE UP — DOWN TO 6 1/2"!



**29.95**  
Only 2.00 Down

Telephoto shots—wide angle shots or extreme close ups. Easy as 1-2-3 with the new auxiliary lenses. Each lens is hard coated for maximum light transmission. Pre-focused and color corrected. No increase in exposure setting is necessary. Bring your subject twice as close with Telephoto—add 75% more area with the Wide-Angle. Close up lens kit consists of +1, +2, and +3 Proxar lenses—allows focussing down to 6 1/2" for amazing close-up results. Use with any color or black and white film. Auxiliaries and close-ups mount by means of adapter ring listed below. Shpg. wt. of each auxiliary lens approx. 6 ozs.

F-488—AUX. TELEPHOTO LENS (A) Net 9.90  
F-489—AUX. WIDE ANGLE LENS (A) Net 9.90  
F-294—CLOSE UP SET (B) Net 8.91  
F-647—VIEW FINDER FOR TELEPHOTO AND W.A. LENS (C) Net 3.39  
F-490—Adapter ring for close up set, filters and auxiliary lenses (D) Shpg. wt., 6 ozs. Net 1.95

**PACKAGE DEAL:** One each of the auxiliary lenses, close up set, adapter, and view finder. Shpg. wt., 1 1/2 lbs. Net 29.95  
F-491

### KODAK FILM WITH PROCESSING INCLUDED

- Save up to 40% off list price
- Rigid Processing Controls Assure highest Quality
- Convenient, direct-mail "mailers" in every roll
- A full number of Prints guaranteed for Kodacolor and black and white.



Licensed by Eastman Kodak

You get factory-fresh film in its original pack, plus a convenient direct-mail mailer. After the complete roll has been filmed, put it into the mailer, drop into a mailbox and in a few days your finished films are delivered postpaid to your door. You get 3 1/2" square or 3 1/2 x 5" prints with Kodacolor and Black & White—and a full number of prints is guaranteed. Should you get less than the full number of prints of Kodacolor or Black & White printable negatives per roll, you will receive coupons for additional FREE prints. DO NOT MAIL FILM TO LAFAYETTE RADIO.

#### KODACHROME COLOR MOVIE FILM

Stock No.	Description	List Price	Net ea.	Net ea. lots of 6
F-575	8mm, 25 ft. roll, Daylight	4.60	3.55	3.40
F-576	8mm, 25 ft. roll, Indoor	4.60	3.55	3.40
F-577	8mm, 25 ft. Mag., Daylight	5.55	4.60	4.42
F-578	8mm, 25 ft. Mag., Indoor	5.55	4.60	4.42

#### KODACHROME 35mm COLOR SLIDE FILM

F-580	35mm, 20 Exp. Daylight	3.80	2.98	2.85
F-581	35mm, 20 Exp. Indoor	3.80	2.98	2.85
F-582	35mm, 36 Exp. Daylight	5.75	4.38	4.20
F-583	35mm, 36 Exp. Indoor	5.75	4.38	4.20

#### KODACOLOR COLOR SNAPSHOTS

F-584	127 Indoor/Outdoor	6.09	3.98	3.77
F-585	120 Indoor/Outdoor	6.09	3.98	3.77
F-586	620 Indoor/Outdoor	6.09	3.98	3.77

#### KODAK BLACK & WHITE ROLL FILM

F-587	127 Verichrome Pan	2.00	1.28	1.17
F-588	120 Verichrome Pan	2.00	1.28	1.17
F-589	620 Verichrome Pan	2.00	1.28	1.17
F-590	35mm, 20 Exp., Plus X	3.40	2.32	2.24
F-591	35mm, 36 Exp., Plus X	5.20	3.45	3.35

### "HOLIDAY" FILM SPECIAL INCLUDES FREE PROCESSING

Color Slide Film: 35mm Daylight, 20 exposures. ASA rating 10.  
Color Movie Film: 8mm, 25 ft. roll. Daylight. Includes exposure dial guide. ASA rating 10.

F-579 35mm, 20 exp. Daylight Net 2.63  
F-592 8mm, 25 ft. Daylight Net 3.15

### MATCHED FILTER AND HOOD SET

**19.95**

- 5 Coated, Screw-in Filters
- Screw-in Lens Shade
- Compartmented Leather Case



Complete set of the most needed filters—plus lens shade threaded to fit directly into the "Elektrik 2.8" lens mount. Lens shade fits either lens or filter. Coated for maximum light transmission. Knurled edges—engraved identification—precision machining. Lens shade finished in glare-free, optical-black. Internal light baffling design. Kit includes Skylight, Daylight A conversion, Flash 80C conversion, Medium Yellow Y2 and Deep yellow G15/02 filters. Sunshade and leather case. Shpg. wt., 8 ozs.  
F-658 Net 19.95

### NEW! ROLLA PRINT

### 10 SECOND PRINTMAKER

- Make Your Own Finished Prints—EVERYTIME
- It's Fun! It's Easy! Prints Instantly!
- No "Laboratory" or "Darkroom" Needed!

**19.95**




Now—you and every member of your family, and your friends, can have your own prints of precious photos. Wonderful, amazing new ROLLA-PRINT lets you make print after print in just a few seconds... from any popular size black-and-white or color negative up to 3 1/4" x 4 1/4". No skill required. No "laboratory" or "dark room" needed. Dries immediately, has permanent finish, won't fade. Anyone, even a child, can make beautiful, finished prints.

and commercial advertising—make instant prints in quantity. Photo fans—design and print Christmas cards, greeting cards, announcements. Everyone—novice or professional—can make prints almost anywhere—in 10 seconds. Approx. 9"Lx6"Wx3"H Less chemicals and paper. Shpg. wt., 3 lbs. F-696 Net 19.95

Rollaprint Chemical Set: Pre-mixed and ready-to-use Developer and Stabilizer. In red and yellow plastic bottles—leakproof, spill-proof, breakproof. Makes 100 prints. Shpg. wt., 2 lbs. F-697 Net 1.95

Rollaprint Paper: Special formula photo paper will make instant prints up to 3 1/4 inches by 4 1/4 inches. Box of 100. Shpg. wt., 8 ozs. F-698 Net 2.95

### Lafayette EXCLUSIVE



**ZOOM LENS 6.95**

- Zoom Projection Lens for New Viewing Thrills!
- Zoom to Dramatic Close-Ups!
- Fill the Screen From 12 to 15 feet—then ZOOM IN!

The very latest in projection accessories for the movie fan. Coated, f1.5, 13 to 25mm focusable zoom lens fits most all popular priced projectors. Converts our own "Holiday" (F-526) into a modern, zoom projector. Works equally well with Bell & Howell, Kodak, Keystone, etc. Adds realism and depth to old "reels". Fills a 30"x40" screen at from 12' to 15'—then zooms in for exciting closeups. Show your movies at the size you want—without moving projector or screen. Bring your projector up to date! Shpg. wt., 6 ozs. F-690 Net 6.95

### LAFAYETTE "SPEEDLITE"

ELECTRONIC PHOTOFLASH SYSTEM

- 110V AC or MIDGET BATTERY PACK
- COLOR BALANCED LIGHT
- 35 WATT SEC. OUTPUT
- BUILT IN DIFFUSER
- SUPER POWERED
- FEATHERWEIGHT

**25.95**



"Bio-lite." Ring type strobe flash attachment. For perfectly flat, shadowless photos. Mounts on lens for close ups. Same guide numbers as F-370. Fits series 6 adapter ring. Shpg. wt., 2 lbs. Net 25.95  
F-501

"Booster" Capacitor. Fits on the bottom of F-370 Speedlite. Easy clamp-on attachment. Furnishes double the normal light output. Shpg. wt., 1 lb. Net 9.95  
F-502

### ELEVATOR TRIPOD

- Folds to 16" including Panhead!
- Extends to 47" PLUS 7" Elevator!
- Tri-Tilt head—Moves in 3 planes!

**8.59**



For any small camera—35mm—reflex—or movie. Professional quality for professional results. Strong—steady—lightweight. Pencil slim, chrom plated, brass legs. Lock securely in place—fold down readily. Single action tilt-pan—and swing over for taking pictures in vertical or horizontal format. Geared elevator center-post with positive lock and folding crank. Weighs only 31 ozs. All the most wanted features in one tripod. Shpg. wt., 2 1/2 lbs. Net 8.59  
F-339

### GENUINE LEATHER GADGET BAG



**4.95**

Genuine pigskin—not plastic. Full 10x8x4". Holds your camera and all accessories. 20" zipper top. Pouch in lid holds filters, etc. Outside pouch with strap and buckle. All brass hardware. Loops and straps on bottom to hold tripod. Includes shoulder strap and pad. Shpg. wt., 1 lb. Net 4.95  
F-320

# LAFAYETTE

Modern Research Equipment for  
SCIENCE AND TECHNOLOGY

## AUTOMATIC ELECTRONIC TRANSISTORIZED SPHYGMOMANOMETER ANEROID BLOOD PRESSURE INDICATOR

- PORTABLE - USE IT ANYWHERE
- SIMPLE - CAN BE USED BY ANYONE
- QUICK - NO ACCOMPANYING DEVICES
- ACCURATE - PULSE SOUNDS VISUALLY INDICATED

The newly developed Lafayette Electronic Blood Pressure Indicator offers, for the first time, a fully transistorized, automatic portable unit for the determination of systolic and diastolic blood pressure. Unlike ordinary instruments, the Lafayette Sphygmomanometer is used without accompanying devices such as a stethoscope. The most minute pulse sounds are picked up by an extremely sensitive transducer and automatically indicated with great accuracy. Readings are taken from an aneroid manometer and a readily discernable indicator lamp. The simplicity of operation and extreme "readability" makes the Lafayette Blood Pressure Indicator ideal for use by persons other than physicians. Nurses, medical corpsmen, trainees, technicians, students, can gain familiarization in a matter of minutes. The automatic characteristics assure complete accuracy. The handy size and light weight of the instrument permits complete portability. Weighing a mere 12 ozs. and measuring only 5" x 3 1/2" x 1 1/4" overall (exclusive of the cuff), it fits readily in any cabinet, desk drawer or bag. Made of the finest materials, this precision instrument is designed to give years of trouble-free service. Expertly crafted for high quality and accuracy. Includes hook-type cuff, connecting tube, inflating bulb and valve, battery, zippered pouches and complete, illustrated operation and maintenance manual. Shpg. wt. 3 lbs.

F-704  
BA-17 Battery for F-704

Net 69.50  
Net 60



**69<sup>50</sup>**

## NEW! POLAROID PICTURES IN ONLY 10 SECONDS

### NEW! POLAROID® J-66 Completely Automatic Electric Eye Camera



- Everybody's Camera—If You Can Aim It, You Can Get The Picture!
- Automatic—No Need To Focus!
- Automatic—No Need To Set Speed!
- Automatic—Nothing To Set!
- Plus—A Built-in Flash Gun
- More Camera For Less Money Than Ever Before
- Postcard-size Pictures in 10 Seconds

The newest—lowest priced—Polaroid Electric Eye Camera. Nothing to set—nothing to focus—just aim and shoot—and 10 seconds later you have a perfect picture! Where "flash" is needed, the built-in bounce flash gun fills the bill! Automatically indicates when light is low. Takes close ups as near as 3 ft. Always in focus—even a mile away! Automatic shutter speeds to 1/1000. Built-in flash gun uses AG-1 bulbs. Shpg. wt., 10 lbs.

F-710 Net 79.95  
Complete J-66 Kit—includes J-66 camera, new carry-all cowhide case, 2 picture rolls of 3000 speed film and 12 AG-1 flash bulbs.  
F-711 Net 95.88

**79<sup>95</sup>**

### NEW! LOWER PRICED! POLAROID® ELECTRIC EYE CAMERA KIT

10 Second  
Pictures!

Truly Eliminates  
Guesswork!

**143<sup>33</sup>**

The 850 Complete Kit

Polaroid's newest, and lowest priced, electric eye camera kit. Automatically sets the correct lens opening and shutter speed for every picture—indoors, outdoors, everywhere! Takes and makes pictures in sunlight—shade—or lamplight without changing your lens or shutter setting! The kit includes the model 850 camera, repeating wink-light, new slim-line case for camera and all accessories; 2 rolls of type 47, 3000 speed film; one packet of "postcarders"; and 2 "write-in" albums. The 850 camera features a coupled rangefinder, parallax—corrected viewfinder; synchronization for electronic flash, regular flash and wink-light; all die-cast body. Makes pictures 3 1/4" x 4 1/4". Shpg. wt., 12 lbs.

F-706 Net 143.33  
F-707 850 Camera Only, Shpg. wt., 6 lbs. Net 116.66



### NEW! The Incredible POLAROID® 900 Electric Eye Camera

**127<sup>77</sup>**



COMPLETE MODEL 900 CAMERA OUTFIT

The complete kit includes the 900 camera, fitted case, wink light, 2 type 47 picture rolls, 1 pkg. of postcarders and 2 write-in albums. Shpg. wt., 12 lbs.  
F-709 Net 157.50

The leader of the Land Camera line, the Model 900 automatically sets the correct lens opening and shutter speed for every picture—indoors, outdoors, anywhere. The tiny micro-eye provides greater range than any other electric eye camera. Used with the wink-light, the Model 900 will make pictures anywhere indoors, day or night, without flashbulbs. You can take pictures outdoors in the sun or shade right up until dusk. In bright sunlight you no longer even have to focus. The shutter operates at speeds approaching 1/1000th sec.—fast enough to stop any action. A new illuminated projected-frame viewfinder shows exactly what your picture will include. The coupled rangefinder is right in the viewfinder window—the same control sets both. The Model 900 is synchronized for regular and electronic flash. The three-element lens is coated on all surfaces and color corrected. Pictures are postcard size: 3 1/4" by 4 1/4". Shpg. wt., 7 lbs.  
F-708 Net 127.77

#### POLAROID CAMERA ACCESSORIES

##### PICTURE ROLLS 10 SECOND DEVELOPING TIME

32 and 42 are panchromatic types with an exposure index of 400 and 200 respectively. 37 and 47 have index ratings of 3000 and are used with the wink-light for indoor shots at normal room lighting levels. Shpg. wt., per roll, 5 ozs.

Stock	Type	Camera Model	Net Per Roll	Net ea. in Lots of 3
F-712	47	All Except 80B, 80A, 80	1.89	1.80
F-713	42	All Except 80B, 80A, 80, J66	1.77	1.68
F-714	37	80B, 80A, 80	1.48	1.40
F-715	32	80B, 80A, 80	1.38	1.30

##### PRINT COPIER

**24.95**



Make copies of your favorite Polaroid pictures at home in seconds. Fit your Polaroid camera to the copier—insert the picture—and make your copy! You can even improve over the original picture. Shpg. wt., 7 lbs.

F-714 for 80B, 80A, 80 Net 24.95  
F-720 for 110B, 110A, 110 Net 24.95  
F-718 for all others, except J66 Net 24.95

##### WINK-Light **14.75**

Compact, automatic "fill-light". Companion to 3000 speed film—permits indoor pictures at night in ordinary room light. Clips to camera—"winks" automatically when shutter is snapped. Shpg. wt., 2 lbs.

F-716 Model 250 for all except 95A, 95B, 100, 700 not needed for J66 Net 14.75  
F-717 Model 252 for 95A, 95B, 100, 700 Net 14.75

##### CLOSE UP KIT


**7.25**



Focus as close as 6 inches from your subject. Take portraits—small still lifes—do photocopying. Includes 3 snap-on close up lenses, leather case and built in tape for accurate focusing. Shpg. wt., 8 ozs.

F-721 for all except 110B, 110A, 110, J66 Net 7.25

# LAFAYETTE TELESCOPES for SCIENCE and TECHNOLOGY

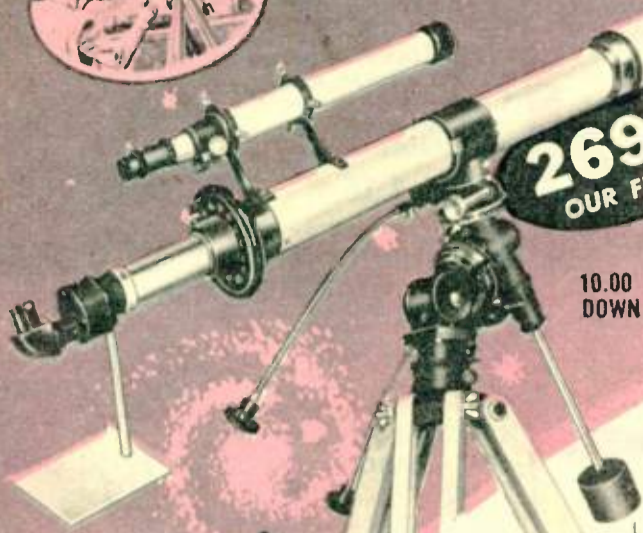

**269.50**  
OUR FINEST!

10.00 DOWN

## Arcturus

### 3" EQUATORIAL REFRACTOR

454x with Barlow Lens RESEARCH QUALITY

- Ultra Precise Helicoid Focusing
- 7 Coated Eyepieces Plus Barlow Lens
- 76.2 mm Clear Aperture
- Most Advanced Equatorial Mount
- 25x, 42 mm Finder Scope

The finest 3" refractor true research quality within the price range of the serious amateur. Incorporating a 75mm hard coated, air-spaced Fraunhofer achromat of 910mm focal length with a full 3" clear aperture, focal ratio of f/12 and resolving power of 1.6". Seven coated eyepieces provide magnifications of 227x, 152x, 101x, 73x, 35x, 18x and 25x through the viewfinder. Helicoid focusing—the finest available—by means of a massive wheel and ultra-fine helical gear. Finder Scope, with rack and pinion focusing, features a 1.6 inch clear aperture objective of 500mm focal length. Provides for interchangeable eyepieces. Equatorial mount of massive construction and advanced design. Incorporates finely calibrated hour and declination circles. Micro-motion controls with extended flexible shafts and compression locks in all axes. Accessories include three sunglasses, moonglass, sun diagonal, two star diagonals, sun projection screen, erecting prism, heavy extensible field tripod, brace, accessory shelf, separate wooden cases for telescope and mount. Shpg. wt., 100 lbs. VIA EXPRESS ONLY.

F-385 WX 10.00 Down Net 269.50



**189.00**  
COMPARE!

Only 5.00 Down

- 454x with Barlow Lens

## Galactic 3" EQUATORIAL REFRACTOR

- Viewfinder Scope 25x, 42mm
- 910 mm Focal Length
- 76.2 mm Clear Aperture
- Micromotion Controls for Declination and Right Ascension
- Resolving Power 1.6
- Barlow Lens Included

Truly superior quality—advanced design—optically and mechanically suitable for serious research. The objective lens is a 79mm, hard coated, air spaced Fraunhofer achromat with a clear aperture of 76.2 mm (3"). Focal length 910 mm, focal ratio f/12, resolving power 1.6". Seven coated eyepieces provide magnifications of 227x, 152x, 101x, 73x, 45x, 35x plus 25x through the viewfinder. Barlow lens add ranges of 454x, 304x, 202x, 146x, 90x, 70x and 50x. Focusing by means of micro-precision rack and pinion drive. The viewfinder scope has a 42mm (1.6 in.) clear aperture objective—500mm focal length—rack and pinion focusing—and will accommodate various eyepieces. The equatorial mount is oversized—insuring stability and smooth action. Finely calibrated hour and declination circles for rapid finding and setting. Micro-motion and rapid motion controls are provided for both declination and right ascension. Micro-motion controls are fitted with flexible shafts and oversized knobs for ease of positioning while viewing. Body tube of white enameled aluminum for maximum strength with minimum weight. Accessories include three sunglasses, moonglass, two star diagonals, sun diagonal, erecting prism, sun projecting screen, extensible field tripod, chain brace, accessory shelf and wooden cabinet. Shpg. wt., 50 lbs. VIA EXPRESS ONLY.

F-384 WX 5.00 Down Net 189.00



**79.50**  
VALUE!

Only 5.00 Down

## Polaris 2.4" EQUATORIAL REFRACTOR

- 320x with Barlow Lens
- Eyepieces for 160x, 88x, 40x, 20x
- 800 mm. focal length
- 62mm. objective
- Micromotion adjustments on both axes
- Equatorial mount
- Coated optics throughout

The unusual value of the Polaris is recognizable in the following specifications. Objective: Fraunhofer-type achromat, hard coated, 62.5mm., 800mm. focal length. Collects about 75 times as much light as the naked eye, resolving power 2 seconds, faintest discernible star 10.7 magnitude. All eyepieces are hard-coated Huygenians. Eyepieces included: 160x (5-mm), 88x (9-mm), 40x (20-mm). Barlow Lens included give ranges of 320x, 176x and 80x. Finder scope is 6x, 30mm. Equatorial mount with slow-motion controls in right ascension and declination. Tripod head with latitude adjustment. Clamp lever for declination and inclination. Accessories include sunglasses, star diagonal, erecting prism, sun projection screen, field tripod, and wooden case. Rack-and-pinion focusing. Heavy plating used throughout to prevent rusting. Shpg. wt., 30 lbs.

F-342 WX 5.00 Down Net 79.50  
F-391 4mm. orthoscopic eyepiece for 200x (400x with Barlow Lens) Net 8.95

### VIEWFINDER 'SCOPES

as low as **6.95**

These are the same fine viewfinders used on Lafayette's refractor telescopes. All have coated, achromatic objectives and eyepieces. Equipped with mounting brackets, and centering screws for collimation.

30 mm (1.2"), 6X. Duraluminum tube finished in white enamel. Draw tube focusing. Eyepiece is interchangeable, 24mm (.97" O.D. Single mounting bracket, as shown with the Polaris, F-342 Shpg. wt., 2 lbs. Net 6.95

32 mm (1.6"), 25X. Air spaced objective .500 mm focal lengths. Dual mounting brackets, as shown on the Arcturus, F-385. Suitable for use as a small celestial and/or terrestrial telescope. Duraluminum tube, finished in white enamel. Standard rack and pinion focusing. Chrome plated brass draw tube, 20 mm eyepiece supplied can be interchanged with eyepieces of other focal lengths. F-628 Shpg. wt., 8 lbs. Net 17.95

## LAFAYETTE BINOCULARS

LOWEST PRICES • HIGHEST QUALITY



### 7X 35 CENTER FOCUS

**17.95**

Precise design — quality material — and expert workmanship. All lenses are hard coated — prisms clamped in lightweight alloy frame and body — sealed against dust and moisture — properly collimated and aligned. All are center focus with adjustable right eyepiece. Hard leather case and neckstraps included.

7X35 Popular, versatile, all purpose binoculars. For the sportsman—hunter—bird watcher—vacationer. High luminosity. Compact design. Shpg. wt., 3 lbs. Net 17.95

7X35 Wide Angle. Top performance—highest quality. Almost twice the field of view of ordinary 7x35 binoculars. Spots and holds a moving target faster and easier. Oversize oculars and prisms. Shpg. wt., 3 1/2 lbs. Net 27.50

F-184 2.00 Down

7X50 Navy style night glasses. Favored for marine use. The choice of professionals because of exceptionally high light gathering power. Superior image brightness. Shpg. wt., 3 1/2 lbs. Net 21.95

F-164 2.00 Down

20X50 King of the long range. Hunters, mountain climbers, plane spotters, forest rangers—any long distance viewing and observation requirement. Shpg. wt., 4 1/2 lbs. Net 27.50

F-185 2.00 Down

\*Add 10% Fed. Tax

### ACCESSORY EYEPIECES

- Highly Corrected
- Hard Coated
- 24.5 mm O.D.
- Finest Quality

Manufactured to extremely close tolerances by one of world's leading manufacturers of optical accessories. These oculars allow you to obtain maximum performance from your refractor or reflector. You can determine the magnification possible by dividing the focal length of the eyepiece into the focal length of the telescope objective lens. All are hard coated. The 24.5 mm O.D. (.97") fits most telescopes currently available.

Stock #	Description	Net. ea.	Stock #	Description	Net. ea.
F-391	4mm Orthoscopic	8.95	F-396	26.32mm Combination Kellner-Achromatic	
F-392	6mm Huygenian-Mittenzwey	5.45	F-397	22mm Kellner-Huygenian	9.45
F-393	9mm Huygenian-Mittenzwey	5.45	F-398	Sunglass—for above oculars	7.95
F-394	12.5mm Huygenian-Mittenzwey	5.45	F-399	Moonglass—for above oculars	1.25
F-395	20mm Huygens	5.75			1.25



## The PLANETARIAT

**8.95**

- Learn about the Solar System
- Aid to navigation in Outer Space
- Illustrates many celestial phenomena

New available — an accurate, easy to comprehend, graphical representation of the components of the Solar System, relative to the Celestial Universe. The Planetariat permits a practical understanding of navigation in outer space and is widely accepted as an invaluable aid to the study of astronomy in many professional institutions. It has been designed with high precision to demonstrate the motions of the Solar System against fixed stars and the appearance of the heavens at any time. It illustrates many celestial happenings such as: revolution of the earth about the sun, as observed from different positions; revolution of the planets, observed on earth (Geocentric) and their actual revolution about the sun (Heliocentric); Precession of the Equinoxes; Mean Solar Time; Apparent Solar Time; Sidereal Time; Appearance of constellations at different times; Diurnal motion; Important stars, planets, constellations and nebulae can be positioned at any date, any hour and any latitude. The Planetariat consists of Solar System Positioner, Equatorial, North and South Polar charts, Horizon indicator and Manual. Positioner on 1/2" thick white Masonite, 12" square. Manual thoroughly covers the many facets of the Planetariat, includes 3 year graphs of the Heliocentric positions of the 9 planets and a glossary of terms. Shpg. wt., 1 1/2 lbs. F-634 Net 8.95

### STAR SPECTROSCOPE WITH 3 EYEPIECES

- Observe the spectra of stars of magnitudes — 1 to 3
- Identify Fraunhofer lines from C to G
- Drawtube focus arrangement
- Fits threads of 25.4 mm O.D. and 24.5 mm O.D. eyepieces

The Star Spectroscope (Amici-prism type) is excellent for visual observations of the spectra of bright stars, comets, and novae. The spectroscope consists of a 5 piece prism assembly, threaded ocular tube, adaptor and 3 cylindrical lens-eyepieces. These widen the star spectrum for easier recognition of details. Use this direct vision spectroscopic on medium-size telescopes to observe stars as faint as magnitude 3. The dispersion angle between the Fraunhofer C line (wave length 6600 angstroms) and the G line (4300 angstroms) is 9°. The resolution is enough to separate the yellow D lines of sodium. Body is made of black-coated brass. Fits Lafayette telescopes F-342, F-384 and F-385. All in plush-lined case. Shpg. wt., 8 oz. F-569 2.00 Down Net 29.95

### ACHROMATIC BARLOW LENS

- Provides Greater Eye Relief!
- Improves Definition!
- Greater Illumination—Wider Field!
- Makes Any Good Telescope Better!
- Doubles Your Telescope's Power!

The Barlow lens is a negative, diverging lens which can increase the range of magnification of any given set of eyepieces. Greater eye relief is provided—even on short focal length eyepieces. Sharpens definition and reduces image deterioration by permitting use of low-power eyepieces to achieve high magnification. This also provides for greater illumination and a wider field. By increasing the effective focal length of the objective—and reducing its relative aperture—it greatly reduces aberrations present in poorly corrected eyepieces. Lafayette's Barlow lens will make any good telescope perform like a much larger one. Fits all Lafayette telescopes except F-330 Explorer. Accepts eyepieces of 24.5 mm (.97") O.D. and fits draw tubes of that size. Shpg. wt., 1 lb. Net 4.95

## ZOOM BINOCULARS

7X to 12X



PRICED EXTRA LOW!  
COMPARE FOR VALUE

**39.95**

- 6 Ranges of Magnification!
- 7X, 8X, 9X, 10X, 11X and 12X!
- The proper Power For Any Use!
- Hard leather Case and Straps!
- Coated lenses — clamped in Prisms!

The most recent advance in binocular design. Zoom through a range of six different powers from 7x to 12x. Like having six pairs of binoculars to choose from. Choose the proper power for any situation. Maximum brilliance maintained through all powers. Deeply milled center focus wheel — full size for ease of adjustment. Individual zoom controls on each eyepiece. Full 40mm objective lenses for high light gathering power. All optics hard coated. Prisms clamped in shock resistant mounts. Lightweight alloy frame and body — sealed against dust and moisture. Includes plush lined, hard leather case and straps. Shpg. wt., 5 lbs. Net 39.95

F-692 2.00 Down

\*Add 10% Fed. Tax

### NEW ZOOM SPOTTING SCOPE

- Any Power from 15X to 30X!
- Ideal for any "Spotting" Need!
- Pan-Head, elevator Tripod

True Zoom action—finger tip control — from 15 power to 30 power. Choose the right power for any "spotting" or viewing need. Brilliant image at any power. 50mm objective, hard coated for maximum light gathering power.

Prismatic system greatly reduces length—only 15" overall. Precisely machined, all metal body. Lightweight scope alone weighs only 2 lbs. May be hand held or used with tripod supplied. Precision finger-tip focusing with oversized, milled ring. Aluminum and chrome-brass tripod adjustable from 12" to 18". Locking pan-head swivels and tilts to any angle. Optical train is fully hard coated. Shpg. wt., 5 lbs. F-685 2.00 Down Net 39.95









# LET'S GO FISHING AT



**SPECIAL SPIN SET:** Versatile, economical spinning set. Especially suited to the popular lighter lures. Set includes: tubular, fiberglass, 2-piece, 5-ft. spinning rod (FT-501); all-metal, light spinning reel (FT-512); 200 yds of 6-lb. mono-filament line (FT-527); 4 all-time favorite spinning lures; hi-impact, polyethylene tackle box (MC-25) and cloth rod bag. If purchased separately would cost 10.87. Shpg. wt., 4 lbs. Net 8.77

**"PUSH BUTTON" SPIN CAST SET:** Easily handled, versatile, medium-priced spin casting outfit. Everything you need to go fishin'! Outfit includes: 5 1/2 ft., 2-piece, tapered, tubular fiberglass spin-cast rod (FT-503). Push-button, closed face spin cast reel (FT-516) pre-wound with 80 yds. of monofilament 6 lb. line. Practice plug. "Best 5" spin-cast lures with a compartmented clear plastic box, 4 soft vinyl "Similures" for casting and trolling. Hi-impact polyethylene tackle box (MC-25). "Gizmo" 10-way sportsman's tool in vinyl case and cloth rod bag. If purchased separately would cost 15.26. Shpg. wt., 5 1/2 lbs. Net 11.77

**Save Over 20%**

**SPIN STAR SET:** Best selling, better quality all "round spinning set. Everything you need—and then some! For all fresh and light salt water fishing. Set includes: 6 1/2 ft., 2-piece, tapered, tubular fiberglass rod (FT-502). "Spin-Star" spinning reel (FT-553). 200 yds. 8 lb. best monofilament line (FT-528). "Best 5" spinning lures with a compartmented, clear plastic case. 7 "Similures" with their own compartmented case. One rigged, vinyl nite crawler (FT-526). One rigged, vinyl eel (FT-525). Cork handled, stainless steel knife with sheath (FT-538). "Gizmo" sportsman's tool in vinyl case (HD-666). Corrosion proof, hi-impact polyethylene tackle box (MC-25), cloth rod bag and cloth reel bag. If purchased separately would cost 21.45. Shpg. wt., 6 1/2 lbs. Net 16.77

**"Spin-lacular" Spinning Outfit:** Our finest quality spinning outfit. All the most wanted items in one outfit. Suitable for fresh and salt water spinning. Carefully matched components for distance, accuracy and trouble-free casting. Outfit includes: 6 1/2 ft., 2-piece, tapered, tubular fiberglass rod (FT-502). "Spin-lacular" spinning reel with interchangeable spools (FT-513). 200 yds., 8-lb., monofilament line (FT-528). "Best 5" spin lures with compartmented, clear plastic box. 3 "Similures" rigged with treble hooks. Rigged, vinyl nite crawler (FT-526). Rigged, vinyl eel (FT-525). Stainless, floating knife with sheath (FT-538). "Gizmo" combination tool (HD-666). Corrosion proof, hi-impact polyethylene tackle box (MC-25). Cloth rod bag and cloth reel bag. If purchased separately would cost 24.15. Shpg. wt., 6 1/2 lbs. Net 19.77

**COMBINATION BAIT-CAST AND FLY-CAST KIT**

- Fine Quality Split Bamboo Rod
- Converts from 8 ft. Fly Rod to 5'4" Casting Rod

**5.95**

The perfect all-around "Fisherman's-Friend." Features a split bamboo rod with interchangeable tips and reversible handle. Chrome plated, screw locking reel seat. Shaped cork handle. Chromed stainless steel guides and extra deep chromed brass ferrules. High gloss lacquered surface—colorful, sealed nylon windings. Kit contains 4 pc. Split bamboo rod, brass swivel, split-shot, line winder, float, nylon line, 12 assorted flies, 2 streamers, 6 hollow point hooks with leaders, leader cutting scissors and fitted wooden case to hold complete kit. Shpg. wt., 3 lbs. FT-504 Net 5.95

**"SWITCH-KIT" FLY BAIT CAST SET:** The perfect all "round fishin'" kit. Carry this one with you on any trip to cover any fishing condition. Outfit includes: 5-piece split bamboo rod with interchangeable tips. Makes up as an 8 ft. fly rod or a 5'4" bait casting rod. Lightweight, anodized aluminum fly reel (FT-539), cork float, nylon leader, split shot, swivels, line winder, line snips, 12 assorted flies, 2 streamer flies, 6 snelled hooks, cherry bobber lure, 12 poppin' bugs, spin-head lure. Compartmented, clear plastic lure box. Cloth rod bag and full instruction book for fishermen. If purchased separately would cost 10.39. Shpg. wt., 5 lbs. FT-561 Net 7.77

## LAFAYETTE'S CATCH OF THE CENTURY IN RODS AND REELS

**(A) SPECIAL TUBULAR FIBREGLASS SPINNING ROD**

- GENUINE TUBULAR SUPER GLASS ROD
- STANDS ROUGHEST ACTION—NEEDS MINIMUM CARE
- SOLID-COMFORTABLE-NATURAL CORK GRIP
- SINGLE WIRE-NON FOULING GUIDES

A first quality tubular (hollow) fiberglass spinning rod—plenty of power, action and eye appeal. All the features of rods selling far above Lafayette's price. Solid-comfortable-natural cork handle with anodized aluminum reel retaining rings. Holds reel solidly and securely. Extra large guides with neat, even nylon wrapping. Sealed against moisture. Long, strong extra deep joining ferrule—precisely fitted. Guides are hard-rust resistant—and properly spaced. Braced tip-top guide. Entire rod finished in hard, durable, black lacquer. Popular 2 piece, 5 foot length. Shpg. wt., 1 1/2 lbs. FT-501 FIBREGLASS SPINNING ROD Net 3.29

**(B) TUBULAR FIBREGLASS SPIN-CAST ROD**

- 5 1/2 FT. MEDIUM-LIGHT ACTION
- POSITIVE LOCK REEL SEAT

Finest 2 piece, hollow fiberglass, medium-light action spin cast rod. Five inch web, shaped cork grip on a die cast aluminum offset handle. Positive, threaded ring, locking reel seat. Designed for closed face spin cast reels! Chrome plated, stainless steel guides and braced, offset tip-top. Chromed, stainless butplate. Extra deep, precisely fitted ferrules. Colorful, sealed, nylon wrappings. Fine action with plenty of backbone. Casts flies, streamers, bugs and poppers. Shpg. wt., 1 1/2 lbs. FT-503 FIBREGLASS SPIN-CAST ROD Net 3.95

**(C) TUBULAR FIBREGLASS "7 SEAS" SPINNING ROD**

- FOR FRESH AND SALT WATER SPINNING!
- ACTUAL WEIGHT ONLY 5 OZS!
- COMPARE TO RODS SELLING FOR TWICE AS MUCH

All the extra power you need to land the "big ones"—in fresh or salt water. Hollow glass construction for that "live" action—plus "backbone" when you need it. 4" cork fore grips 6 1/2" cork butt with vinyl butt plate. Extra-large, non-fouling, diamond-hard guide. "Snake" design allows guides to flex with rod. Braced tip top of super-hardened, stainless steel. Fixed reel seat polished brass with chrome retaining collar and lock nut. Glossy black lacquered finish. Colorful, sealed nylon windings. 2 piece blade with extra deep ferrules. Overall length 6 1/2 ft. Superbly tapered—designed for maximum lure action—trouble free construction. Shpg. wt., 1 lb. FT-502 FIBREGLASS SPINNING ROD Net 5.95

**(D) SPECIAL SPINNING REEL**

- GOLD ANODIZED SPOOL
- NYLON BEVEL GEAR
- ANTI-REVERSE LOCK

A fine, light spinning reel with all the features found in far more expensive reels. Strong-sturdy handsome appearance. Selective anti-reverse lock. Chrome plated pickup arm. Body of non-corroding, ebonized aluminum alloy. Housing and spool of gold anodized aluminum for maximum corrosion resistance. Noiseless, smooth running, nylon bevel gear. Handle is removable for storage. Holds 200 yds. of 4 lb. test line. Gear ratio of 3 to 1. Shpg. wt., 1 lb. FT-512 SPINNING REEL Net 2.95

**(E) PUSH BUTTON SPIN CAST REEL**

Closed face—back lash free—push button action. Push button spring release—assures instantaneous line control the moment the lure hits water. Brass Gears—precision machined to assure long, trouble-free service. Fingertip Anti-Reverse Lever—for fast action. Spring Loaded Geared Drag Adjustment—may be set for any tension. Attractively finished in triple lacquered ebony with gold-anodized spool cover. Chrome plated double handle crank. Incorporates the features and trouble-free performance of the most expensive reels. Complete with 80 yds. of 6 lb. line monofilament line and rubber practice plug. Actual weight only 8 1/2 ozs. Shpg. wt., 1 lb. FT-516 PUSH BUTTON SPIN CAST REEL Net 4.59

**(F) NEW! "SPIN-TACULAR" REEL**

- INTERCHANGEABLE SPOOLS
- FINGER TIP ANTI-REVERSE

Finest—fastest imported spin reel. Ultra smooth recovery, ratio about 4 to 1. Full bail, stainless pickup. Positive, smooth drag with click built into spool. Friction free line guide of diamond-hard tungsten carbide. Positive anti-reverse clutch—no manual holding when playing, netting or trolling. Metal reel with two interchangeable spools. Capacities of from 200 yds. of 10 lb. line, 340 yds. of 6 lb. line, 100 yds. of 4 lb. line, down to 200 yds. of 2 lb. line. "Natural-form" knob on reel handle, handle folds back for storage. Corrosion resistant black finish. Complete with extra spool, spool case, cloth bag and instructions. Actual weight 9 ozs. Shpg. wt., 1 lb. 4 oz. FT-513 "SPIN-TACULAR" REEL Net 6.95

**(G) NEW! "7 SEAS" SPIN REEL**

- ALL THE FEATURES OF THE MOST EXPENSIVE REELS

The "greatest" for surf-casting, trolling, spinning or any salt water fishing. High pressure moulded of an aluminum-magnesium alloy, surface treated and anti-corrosion coated. Eliminates need for the usual care and cleaning associated with salt water gear. Unique planetary gear system crosswinds line for greater line capacity and the smoothest longest casts you ever made! "Back-lash" is a thing of the past. Fully adjustable, positive drag action. Built right into the spool for smooth, constant tension. Full bail pick up of chromed bronze. Line guide of super hard chromium carbide. Torpedo handle, spring loaded, folds back for storage. Positive, fingertip anti-reverse control. All the features normally found in the most expensive reels. Actual weight 19 ozs. Shpg. wt., 2 lbs. FT-514 "7 SEAS" SPIN REEL Net 11.95

**(H) "SPIN-STAR" SPINNING REEL**

- Fresh Water or Light Salt Water
- Aluminum Alloy Construction
- Weighs only 11 oz.

All the features of nationally-famous spinning reels costing dollars more. Full bail pick-up, specially hardened lineguide, die cast aluminum drive gear, brass pinion gear. Special spool design prevents line snag—crosswinds the line evenly. Aluminum alloy construction—light but strong. Anti-reverse lever. Designed for fresh water or light salt water fishing. All parts protected against rust and corrosion. Gear ratio: 3.5 to 1. Spool capacity 200 yards 8-lb. monofilament line. Shpg. wt. 1 lb. FT-553 Spinning Reel Net 4.59

**(I) THRIFT-BUY FLY REEL**

- SINGLE-ACTION
- ALUMINUM FRAME

Strong lightweight aluminum frame—perforated for fast line drying. The actual weight is only 3 1/2 oz.—our lightest reel. Counter-balanced handle, adjustable click. Quiet Action. Capacity: 50 yds. D line. Shpg. wt., 6 oz. FT-539 Fly Reel Net 1.98

**Deluxe TACKLE BOX**

**5.55**

- Corrosion Proof
- Noiseless
- Floating
- 15 1/2 x 6 1/2 x 6"

Unbreakable, hi-impact plastic. Solid brass links and hinge pins. Nylon lock. Perfect for salt water, can't rust or corrode. Tongue and groove form watertight seal. Can't sink if dropped—floats until retrieved. 2 cork lined cantilever trays—each has 7 compartments. All corners rounded—snag proof design. Post-style handle. Man-sized and rust proof. Permanent color—goes all the way through. Shpg. wt., 5 lbs. MC-33 Net 5.55

**COLLAPSIBLE METAL FISH BAG**

- Rustproof Live Bag
- Chainlink 1/2" Mesh

**3.95**

This king-size fish bag keeps fish alive and fresh. Armored to protect the big fish. Has convenient top and bottom spring doors. Collapsed flat for easy carrying and storing. 24" tall; 8" mouth, 14" max. diam. Shpg. wt., 1 1/2 lbs. FT-552 Fish Bag Net 3.95

**The "BIG 86"**

**5.95**

- 86 ASSORTED LURES!
- 24 WET AND DRY FLIES!
- 24 DIVIDED WING FLIES!
- 24 SALMON STREAMERS!
- 12 FANCY POPPERS!
- RIGGED WORM
- RIGGED EEL

Lafayette's own selection of proven fish getters. 86 top quality, expertly tied and fitted flies, streamers and poppers. Assorted wet and dry flies include the most popular patterns—Royal Coachman, Black Gnat, Silver Doctor, Red Ibis, etc. The divided wing flies, made with natural tip hackle, include such favorites as Yellow Sally, Parma Belle, Quill Gordon, Royal Coachman, etc. The streamers include Black Ghost, Grey Ghost, Light Tiger, Jack Scott, etc. The poppers include scalded bodies, frog tops, open mouths hula skirts, hackle tails and feather tails. Seven dozen of the deadliest fish getters—plus a soft plastic worm on a 3 hook harness and black plastic eel on a 2 hook harness. Shpg. wt., 1 lb. FT-537 Net 5.95

**NEW "21 PLUS" KIT 20 Assorted Lures—PLUS!**

- 7 Lifelike "Similures"
- 8 Spinner Flies
- 3 Spinning Lures
- Cherry Bobber
- Spin-Head Bass Killer
- "Gizmo" 10 Way Combo Tool
- Floating Stainless Steel Knife

Rare collection of proven "killers." You get seven fully rigged vinyl "Similures"—including minnows, shrimp and the famous "Baby-Cuda." Eight weighted spin flies including Bee, Quill Gordon, Wickhams Fancy, etc. Three 1/2 oz. spinning lures—famous patterns such as "Shimmer Spin," "Goldfish" and "Svenska." Bass and walleye "getters" Cherry Bobber and Spin Head. "Gizmo" 10 way tool and cork handled, stainless steel floating knife with leather sheath. Shpg. wt., 1 1/2 lbs. FT-556 Net 4.95

**"HOW TO TAKE FRESH WATER FISH"**

- Profusely Illustrated

Pocket size—paper bound—127 pages. Covers the whole field of freshwater fishery. Complete detailed information. Tackle selection—methods—maintenance. Covers fly casting—spinning—bait casting. Techniques—baits—tackle. How to catch 'em—care for 'em—and cook 'em. BK-1442 Net .89

**Special "7 SEAS" TROLLING REEL**

- FINGERTIP FREE SPOOL CLUTCH
- ADJUSTABLE STAR DRAG

Universal salt water reel. Powerful star drag, free spool, fast retrieve. All metal construction of highly corrosion resistant alloys. Aluminum-magnesium alloy spool. 3 inch diameter side plates—with satin black, triple baked, rust resistant, permanent finish. Conventional free spool lever. Hardened bronze gears. Counter weighted, torpedo handle. Chrome plated, hand polished frame. Self lubricating, long lasting bronze bearings. Capacity 250 yds. of 27 lb. line. Actual weight 17 ozs. Shpg. wt., 1 1/2 lbs. FT-515 "7 SEAS" TROLLING REEL Net 5.77



EXCLUSIVE

Lafayette f 2

ZOOM

8mm MOVIE CAMERA

with  
AUTOMATIC ELECTRIC EYE  
PHOTOMETER



ONLY  
**59.95**

- Follow Zoom action through lens coupled View finder
- Fast f2 Lens — Zooms from Wide Angle . . . to Normal . . . to Telephoto
- Built in coupled electric Photometer
- 4 Speeds — including Slow Motion
- Single Frame (animation) Exposure
- 5 film speeds — ASA 10 to 40
- Trigger Action Pistol Grip

You see exactly what the camera gets through the lens coupled viewfinder. Nothing can match a Zoom Movie Camera for unusual, dramatic effects and all-round versatility. You get needle sharp zoom pictures from Wide Angle through Normal to Telephoto. In focus down to 1 ft. The automatic electric photometer needle is visible in the viewfinder and cross-coupled to the shutter diaphragm. Just match the needle in the viewfinder for perfect exposure. Control for filter factor compensations. Calibrated for ASA 10-16-20-32 and 40 film speed. Four motor speeds for 12-16-24- and 32-frames-per-second. Plus single frame for animation. Fast, drop-in spool loading. Quiet, ratchet wind motor in a sturdy, die cast aluminum body. Trigger action, pistol grip handle and leather wrist strap included. Shpg. wt., 4 lbs.

F-689 Net 59.95  
F-648 Holster Case. Shpg. wt., 8 oz. Net 2.95

PRICED EXTRA  
LOW!  
COMPARE  
FOR VALUE

ZOOM MOVIE OUTFIT  
COMPARE — for Value!

★ Everything you need to take and show home movies!



Only  
**99.95**

Complete ZOOM movie outfit contains all the equipment needed for success in taking and showing dramatic home movies. You get the exclusive Lafayette 8mm ZOOM movie camera (F-689), "Holiday" 500 watt projector (F-526), 30" x 40" folding tripod projection screen (F-536), bar light (F-537), two 300 watt photoflood lamps (F-539), two 400' reels and cans (F-538), holster type camera case (F-648) and one 25 ft. roll of Kodak movie film with processing included. Shpg. wt., 30 lbs. F-693X Net 99.95

Regular Catalog Price 120.45. YOU SAVE 20.50!

LAFAYETTE "TINY" 6-TRANSISTOR RADIO

PLUS DIODE AND THERMISTOR

SENSATIONAL PERFORMANCE  
in a Small Package!

- 6 Transistors Plus Germanium Diode and Thermistor
- Vest Pocket Size—Only 4Hx2½Wx1¼"D
- Earphone Jack Built in For Private Listening
- Full Tone Dynamic Speaker
- Trouble-Free Printed Circuit
- Built-In Ferrite Bar Antenna
- Superheterodyne Circuit
- Economical—Uses Only One Battery



Including Earphone  
Battery  
and Carrying Case

**15.95**

Engineered and constructed with the jewel like precision of a fine watch . . . true superhet trouble free printed circuit with push pull audio output utilizes 6 ultra modern Transistors plus a Germanium Diode and Thermistor—achieves absolutely fantastic reception over the entire broadcast band. Requires only a single long-life 9 volt battery due to the exceptionally low battery drain. Smart black and gold case of rugged durable plastic. Soft leather carrying case with attached earphone pouch. Just 4Hx2½Wx1¼" thick

and weighs a mere 10 ounces. Includes battery carrying case and earphone for personal listening . . . all at an unbelievably low price! Shpg. wt., 2 lbs.

FS-206 "Tiny" 6-Transistor Radio Net 15.95

Extra Battery for FS-206. Burgess 2u6 type (1 required). Shpg. wt., 2 oz. BA-178 Net .01

LAFAYETTE Transistorized  
Professional MINIATURE TAPE  
RECORDER

- Two Speeds — 3¾ & 1½ IPS
- includes Carrying Case
- Portable — only 4 lbs.
- Fully Transistorized — 5 Transistors, 1 Thermistor



VALUE!  
**79.95**

BOOK SIZE  
only 7¾"Wx5¼"Dx2½"H



Ideal for use everywhere (travel, sales meetings, club functions, parties, etc.) — self-contained with built-in speaker and amplifier. 5 transistors and 1 thermistor with precision printed circuitry and quality PM speaker you would expect from units three and four times this price. Single function lever operation for Rewind, Stop, Play and Record; special safety record button prevents accidental erasure. Built-in level meter shows battery condition and correct recording level. Rugged, sensitive dynamic microphone with desk stand. Convenient volume control adjustment plus jacks for earphones, radio and microphone are accessible from the front. Inputs at rear for AC power supply and remote control foot switch.

Sturdy metal case has snap-open top for easy tape loading and features a calibrated plexiglass insert for viewing tape motion and estimating playing time. Precision heads (1 erase plus, 1 record/playback) are half-track — upper half is recorded first and tape is then turned over to record on lower half . . . records and plays up to 68 minutes at 1½ ips; 34 minutes at 3¾ ips. Powered by 6 inexpensive standard penlight cells included. Supplied with dynamic microphone, crystal earphone, 3" reel of tape, empty reel and leather carrying case. Shpg. wt., 8 lbs. RK-120WX Net 79.95



COMPLETE RANGE OF ACCESSORIES

- AC ADAPTOR—Allows switching the RK-120 from battery operation to 115 v. 60 cycle AC. Has on/off switch plus pilot light. Shpg. wt., 2½ lbs. RK-123 Net 9.95
- REMOTE CONTROL FOOT SWITCH—Starts and stops RK-120 instantly. Ideal for dictation. Shpg. wt., 1½ lbs. RK-122 Net 4.75
- TELEPHONE PICK-UP COIL—For recording telephone conversations. RK-121 Shpg. wt., 1 lb. Net 2.95
- PATCH CORD—Allows recording from radio, TV, phone, speaker. RK-124 Shpg. wt., ½ lb. Net .85
- 3" REEL 300 FT. 1/2 MI Mylar Tape. Shpg. wt., ½ lb. RT-20 Net .69
- BATTERIES—The RK-120 requires 6 standard "Z" cells. Shpg. wt., 4 oz. BA-155 Net ea. 1.12

LAFAYETTE  
RADIO  
165-08 LIBERTY AVENUE,  
JAMAICA 33, N. Y.

BULK RATE  
U. S. POSTAGE  
PAID  
New York, N. Y.  
Permit No. 8486

T U V W X  
Y Z A B C

# Sensational LAFAYETTE f1.9 TRIPLE TURRET 8mm MOVIE CAMERA with Built-In Electric Exposure Meter



MORE CAMERA FOR THE MONEY THAN ANY OTHER

- ✓ CHECK the FEATURES!
- ✓ CHECK the PRICE!

**39.50**  
2.00 DOWN

- Built-in Electronic Exposure Meter
- 3 Fast Fixed Focus f1.9 Lenses
- Built-in Neutral Density and Type A Filters
- Pistol Grip with Trigger Release
- Single Frame Exposure
- "Combo-View" Finder—for normal, wide angle and Telephoto areas
- "Drop-in" Spool loading
- Built-in Exposure Guide
- Die Cast Aluminum Body
- Ratchet-spring Wind

Sleek-modern-versatile and priced to allow your "Move-up-to-Movies." Features a built-in photo-electronic exposure meter that eliminates all guesswork—all you do is aim the camera, the meter tells you automatically what lens setting to use, and then you shoot. Choose from 3 fast f1.9 lenses—normal, wide-angle or telephoto with each lens recessed in its own sun shade. There is a fixed focus on all three lenses—no need for "focus-fumbling." You can instantly switch from normal to telephoto to wide angle on the positive lock turret that prevents any slipping. A single dial exposure setting operates for all three lenses. The lensatic optical viewfinder has three different frame areas—one for each lens. Footage indicator tells you exactly how much film is left in camera. Drop-in spool loading is easy and economical—impossible to reverse load. Heavy-duty governor controlled, spring wind motor in a sturdy, die case aluminum body. Pistol grip handle with trigger release for perfect balance, one hand shooting. Shpg. wt., 4½ lbs. Net 39.50  
F-607 Net 2.95  
F-648 Holster Case for F-607, Shpg. wt., 8 oz. Net 2.95

## MATCHED MOVIE OUTFIT

- Matched to Take Movies—Show Movies
- Unmatched in Price and Value!
- Save 8.50

ONLY  
**87.95**

5.00 DOWN

Everything you need for movie-making and showing fun. No need to "shop" for unmatched equipment, no need to pay more. You get all this: Lafayette's F-607 f1.9, Triple Turret movie camera with exposure meter; holster type camera case; "Holiday," F-526, 500-watt projector; F-536 30x40" screen; F-537 Bar Light; 2 F-539 photo flood lamps; 2 F-538 400' reels and cans. Unbeatable for foolproof shooting and showing of indoor and outdoor movies. Shpg. wt., 30 lbs. Net 87.95  
F-650WX 5.00 Down

### LAFAYETTE AG FLASH GUN

- Compact in Size
- Made for the New AG Bulbs
- Dependable B-C Operation

**2.99**



The new Lafayette AG flash gun is a compact, palm size yet offers dependable B-C operation. Made for the new AG flashbulbs which are small in size and big in performance. The Lafayette flash gun has a fan-type reflector which measures 2" in diameter when opened. Standard shoe fits all standard accessory clips. Features a Computer Dial for determining correct F stop. Testlight for checking battery and bulb, and Bulb Ejector. Complete with cord. Operates on 15V battery (not incl.). Shpg. wt., 8 ozs. Net 2.99  
F-699 Net .81  
BA-116 15-Volt Battery for above

### GOOSENECK MAGNIFYING LAMP

- Ideal for Hobbyists—Stamp Collectors, Entomologists, etc.

- Gooseneck Arm Sets Lamp in Any Position

ONLY

**18.95**



The perfect lamp for the hobbyist who needs plenty of light and magnification for close, precision work. The flexible, gooseneck arm adjusts and holds the lamp in the position you want. Five inch diameter magnifying glass; overall length about 2½ feet. Sturdy, clamp-mount base. Uses 22-watt fluorescent tube (not included). Shpg. wt., 6 lbs. Net 18.95  
FL-202 Bulb for above (wt. 1 lb.) Net 2.80

### CLOSEOUT

#### CINE "X" METER

Mounts on Turret!  
Fast! Easy! Direct Reading!



**SPECIAL SALE PRICE 3.95**

Designed specifically for movie camera owners. Direct reading—nothing to remember—correct exposure shown in "X" stops. Any "turret" camera becomes a camera with "built-in" exposure meter. Just remove a lens not in use and attach the Cine "X" Meter. Aim your cameras—read exposure—and shoot! Calibrated for exposure from f:1 to f:32. ASA index from 6 to 200. Eliminates "mental conversion" when using filters. Just place filter in Cine "X" Meter for reading to use when filter is on lens. Perfect color temperature sensitivity—accurate exposures—even in poor light. Can be hand held or hung on chain. Shpg. wt., 8 ozs. Net 3.95

### 35 mm SLIDE FILE



Portable all steel 35mm slide file. Store 150 2x2 glass slides or 300 2x2 cardboard slides. Includes index card, and magnetic strips for quick, easy identification. Finished in platinum gray enamel. Shpg. wt., 3 lbs. Net 1.69  
F-161

### FOLDING BC FLASH GUN



Efficient 4½" diameter metal reflector has pebbled finish to eliminate hot spots. B-C combination for surefire and hi voltage. Heavy molded battery case with built-in test lamp—bulb ejector—extension socket. Standard shoe with pressure adjust fits accessory clips. Uses standard bayonet base flash bulbs. Novel, useful exposure guide built in on rear of case. Complete with leather case, battery, condenser, PC cord and ASA adapter. Shpg. wt., 1 lb. Net 3.99  
F-209 Net 1.05  
BA-117 Spare Battery for above


### NEW! CLAMP TRIPOD



World's Most Versatile Tripod  
An indispensable photographic accessory. Combines, in one small unit, a clamp, tilt to, and table top tripod. Legs stored in shaft. Will clamp to trees, pipes, light stand, car, window, etc. Supplied complete with zipper case. Shpg. wt., 1 lb. Net 5.98  
F-654

### "SUPER-VUE" SLIDE VIEWER

- For all 2x2 slides—35mm, super slides, 828
- Large Screen—3"x3"—Viewing.
- Battery Illuminated

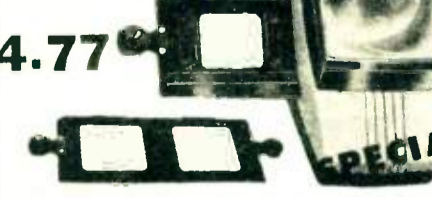

Extra brilliant viewing of all 2 x 2 slides, 35mm, Bantam (828) and super-slides. Paper, metal, plastic or glass. Highly corrected 3" x 3" lens allows small group viewing. May be hand-held or placed on table. Built-in "tilt" for best viewing angle. Lens system gives amazing depth to carriers provide semi automatic action. "Battery Save" feature—lights only when slide is in viewing position. Bright—sharp images with no "cut" corners. Lightweight—sturdy—compact. Complete with 2 carriers—2 color corrected bulbs—instructions. Shpg. wt., 3½ lbs. Net 4.77  
F-497 (Less batteries) Net 4.77  
BA-136 Burgess 21 (2 required) Net 1.33

### PROJECT-A-SCOPE

- Projects Giant Pictures in Color Or Black and White—Without Films or Negatives
- For Lectures—Study—Class-room—anywhere.

**5.95**



Amazingly versatile! Delightfully simple! Adjustable professional lenses. Just place it over anything flat—magazines, books, photos, drawings, coins, stamps, documents, maps, natural objects—and see a brilliant giant enlargement projected on any white wall or screen in glowing true-to-life color or black and white. A boon to students, artists, collectors, lecturers, demonstrators. Children can project their favorite comics or story books to amuse themselves and their friends. Heat resistant, hi-impact, U/L Approved 110V. AC/DC. Shpg. wt., 2 lbs. Net 5.95  
F-694

### "HOLIDAY" 500-WATT 8mm PROJECTOR

- Coated ¼" f1.6 Lens!
- Swing-Out Gate—Easy Loading
- High Intensity Blower Cooler!
- 400-ft. Reel Capacity

**37.95**



Show your movies sharp and clear! Swing-out gate for fast, easy loading. Scientific Marex film extends life of your film with less wear and tear. High-intensity blower for cooling. Coated ¼" f1.6 lens for wide-angle viewing. Separate switches for blower and lamp. Rapid rewind and quick-tilt features for ease of operation. Lifetime lubrication with oil light bearings. All-aluminum, die-cast construction. 500-watt bulb Lifetime guarantee. Shpg. wt., 10 lbs. Net 37.95  
F-526 2.00 Down  
F-649 Carrying Case for F-526. Shpg. wt., 2 lbs. Net 6.44

### FOLDING TRIPOD PROJECTION SCREEN

**9.75**

Fine grain glass beading for extra brilliance, excellent viewing. Heavy-duty folding tripod adjustable to various heights. Large 30"x40" size. Shpg. wt., 10 lbs. Net 9.75  
F-536

### 4-LAMP MOVIE "BOUNCE" BAR LIGHT

**7.95**

- For all 16mm cameras
- For color or b-&-w
- Complete with flood lamps and case

Indoor movie-making becomes simple. Trapeze camera mount keeps lamps above camera, eliminating unwanted shadows. Ideal for electric-eye models. Swirls 90° for "bounce" effects. Unique V-case accepts unit while lamps are hot—no risk of lamp breakage. Exposure guide, on-off switch. Compact, portable, lightweight. Complete with barlight, 4 lamps and case. Shpg. wt., 6 lbs. Net 7.95  
F-651

### NEW BOOSTER EXPOSURE METER

- Includes booster—Leather cases—neck cord
- Stills or Movies
- ASA Scale—LVS Scale



Extremely versatile—extremely simple. Highly legible direct reading dial. Speeds from 4 sec. to 1/1000 sec. Lens aperture settings from f:1 to f:32. ASA scale 6 to 800. LVS scale 1 to 18. Cine scale 8, 16, 24 and 32 frames per second. Booster cell makes possible readings at extremely low light levels. Small-rugged-lightweight. Includes booster cell, leather cases, neck cord and instructions. Shpg. wt., 1 lb. Net 6.45  
F-349 List 11.95

### "35" CLIP-ON EXPOSURE METER

- FITS CAMERA ACCESSORY SHOE
- ASA SCALE 10 TO 1000
- MEASURES REFLECTED AND INCIDENT LIGHT

**3.95**

Exceptionally convenient exposure meter. Clips right on camera—quick easy reading. Gives better, more accurately exposed pictures with a minimum of effort. Speeds 1/1000 to 1 min. Lens aperture f:1 to f:22. Measures reflected and incident light. Mounts on camera or may be hand held. Complete with leather case and instructions. Shpg. wt., ½ lb. Net 3.95  
F-351

### BOUNCE FLASH BRACKET

Particularly suited to Single-lens Reflex cameras. Permits bounce flash with any clip on Flashgun. Mounts in standard tripod socket. Adjustable length, rotating-swiveling head. Shpg. wt., 6 ozs. Net 1.05  
F-620

OW! NO MONEY DOWN WHEN YOU USE THE EASY-PAY PLAN