

WIRELESS

DECEMBER 2020 THE UK'S NUMBER ONE AMATEUR RADIO MAGAZINE SINCE 1932


CONTEST RESULTS

The winners of our 2020 144MHz QRP competition



ICOM-705 FIRST UK TEST

Read why we gave this long awaited portable transceiver top marks

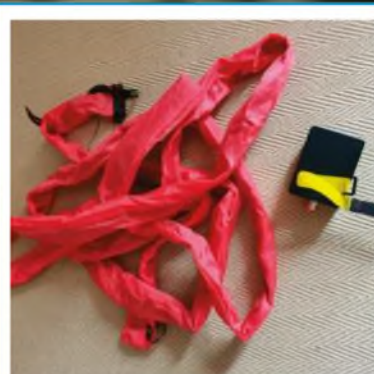

Going incognito

The Editor tests the new Bantenna sleeve antenna



Cheap handheld

Playing with a good value, and practical dual band

All about capacitors and capacitance

Getting to grips with the basics of this essential electrical device



HOW-TO Building your 2m all mode transceiver

Why is there no replacement for the single-band VHF multimodes of old



Get Started!

Part five of our 'how-to' series

Readers' letters

You tell us what matters in your world

WARNERS

£4.50

(display until 31st December 2020)

WATERS & STANTON EUROPE'S HAM STORE Europe's HAM RADIO STORE

Video Channel

We now have a regular YouTube TV Channel with technical features and equipment reviews. Just type in 'watersstanton' into the YouTube search band to watch the latest editions. We are approaching 6,000 subscribers so it is worth taking a look regularly. If you press the free 'Subscriber' button, you will be alerted to every new video. Keep in touch.

Peter Waters G3OJV



ELECRAFT

Brought to you by W&S!

GO HF PORTABLE with the BEST!

HF Portable is great fun. It gets you out in the wide outdoors, in fresh air and with fresh challenges. It means less power, less in the way of antennas but lots more in the way of enjoyment. Elecraft are market leaders in this area. The lightweight KX2 and KX3 are powerful radios that can deliver 10W of output power (15W on 20m and below for the KX3). Their receivers are legendary in terms of performance and can read the weakest of signals.

The variable selectivity makes copy as good or better than your base transceiver. The large dial is easy to read, even in bright light and the diminutive KX2 even has a built-in microphone! There are a host of different features and you can download the User Manuals from the Elecraft site. And if you want even more fun, you can build the KX3 yourself - easily done in a day.

Trust Elecraft to bring sunshine and fun into Ham Radio!

Elecraft KX2 Portable HF Transceiver

Elecraft KX3 160 - 6m, 15W



2 Year Warranty

Mic & paddle key are optional extras



Mic & paddle key are optional extras

Elecraft's KX2 'stealth' transceiver can go wherever your imagination takes you! A rear tilt-foot angles the KX2 for use on any surface, from desktop to park bench to rock.

- 12W Out 80m-10m
- Fits into a coat pocket
- Built-in microphone
- Variable selectivity
- CW audio filter
- On screen data decode
- Very low current drain
- PSK31 and RTTY send
- Backlight can be turned off
- Internal ATU option
- 2 Channel SSB Recorder
- 3 Channel CW Data Recorder
- 2.8"H x 5.8"W x 1.5"D
- Weight: 13 oz (less options)

£959.95

There is something very special about the KX3. It out-performs any similar transceiver and almost all of the base stations. You can run it at 100mW or increase to any power up to 15W (a bit less above 20m). You can add 2m or 4m, Add a narrow roofing filter or auto ATU. No other rig can match it.

- All modes
- 3.4"H x 7.4"W x 1.7"D
- 18 oz (less options)
- Rear tilt feet fold up for transport
- Custom high-contrast LCD
- Current drain as low as 150 mA in receive mode

Built: £1349.95 Kit: £1299.95

Icom IC-705 160m - 70cm



£1299.95

The amazing QRP 160m-6m and 2m/70cm All-Mode transceiver. Up to 10 Watts output on Ext. 12V or 5 Watts in battery. Includes speaker mic and DC lead. Battery is charged from 12V supply. Lovely colour screen with touch control and touch menu system. Similar to IC-7300 control and navigation.

Elecraft KXPA100 Amplifier 100W 160m-6m



Ideal for the IC-705, it has a switched input of 5 or 10W for 100W output. We can supply a dedicated PTT lead for the IC-705. Bandchanging is auto sensed. Easy build, no solder kit £899.95 Ready built £949.95

Here are some great accessories

Pro Audio KX-33 Pocket PSU

Slips in your pocket yet powers the IC-705 to 10 Watts.

£69.95 IC-705 Lead £12.95



Icom LC-192

Rucksack for the IC-705. Radio can be operated whilst in place. £169.00

Diamond A1445SR

5 element 2m Yagi. Lightweight, packs down easily and SO-239 £49.95



Vibroplex HF4010-KW

4-Band 40m-10m End Fed Half-Wave. Great for home or portable. £159.95

Buddistick

A portable, compact vertical system covering all bands 40m-6m inc. WARC Bands £159.95



Elecraft T1-A

Auto ATU coax and random wire. Smallest and widest range. No drain except when tuning. £249.95

call: **01702 204965** email: sales@wsplc.com

Waters & Stanton Ltd • Unit 1 • Fitzherbert Spur • Farlington • Portsmouth • PO6 1TT

[@wsplc](https://www.facebook.com/wsplc) blog.hamradiostore.co.uk [facebook.com/WatersandStanton](https://www.facebook.com/WatersandStanton) [YouTube Waters and Stanton](https://www.youtube.com/WatersandStanton)

BUY with CONFIDENCE

47 years of supporting the Hobby

We have the **LARGEST HAM RADIO WAREHOUSE** Full of every imaginable product for your hobby

Diamond

Diamond SD-330 Mobile HF Whip

Remote electrical tuning for your car

- 80m - 10m
- 200W SSB
- Height: 1.85m
- Fast tuning
- PL-259 fit
- 12V DC 100mA

£359.95

Diamond Splitters

Cable splitters for FT-991A and IC-7900 and similar

- MX-72A.....2m/70cms£39.95
MX-72N.....2m/70cms£39.95
MX-3000N.....2m/70cm/23cm£82.95

Diamond VHF Yagis



Great value lightweight VHF/UHF Antennas

- A14455R.....5 Element 2m.....£49.95
A144510R.....10 Element 2m.....£79.95
A430510R.....10 Element 70cm.....£54.95
A430515R.....15 Element 70cm.....£64.95
A502HBR.....2 Element 6m.....£89.95

Check out the Diamond Verticals on our website

Diamond Compact Dipoles

Choke Trapped

W-735

40m/80, dipole 26m long. Rated at 1.2kW. Balun feed 50 ohm SO-239£89.95

W-8010

80-40-20-15-10m Dipole 19.2m long with balun feed. Rated 1.2kW.....£119.95

T2FD Compact

WD-330

2-30MHz continuous 150W. Length 26m, balun + 30m coax cable£199.95

W-330S

2-30MHz continuous 150W. Length 10m with balun, Coax extra£159.95

W-330J

2-30MHz continuous 150W. Length 25m with balun, Coax extra£139.95

Diamond

Super Accurate VSWR Power Meters

MADE TO MEASURE!

SX-400



140-525MHz 5/20/200W rms or peak power. FSD 4W£83.95

SX-400N N-socket version.....£88.95

SX-200 1.8 - 200MHz 5/20/200W rms or peak power. FSD 1W.....£76.95

SX-100 1.6 - 60MHz 30/300/3000W rms or peak power. FSD 3W.....£89.95

SX-600 1.8 - 525MHz 20/200W dual sensor. FSD 1W/4W.....£149.95



TOP RADIOS



Yaesu FT-991A HF - 70cms 100W max

This is a real top seller. It's the one radio that you can put on the desk and enjoy HF and VHF. Realtime spectrum scope and a multi-colour waterfall display. Internal ATU on HF, USB data Interface

£1,239.95 After **CASHBACK** £1149.95



Icom IC-7300

A great performer! 160m - 4m 100W Max. £1195.95



Icom IC-7610

160m - 6m 100W

£2999.95



Icom IC-9700

SDR employed on both 2m and 70cms £1795.95



Icom IC-7100

HF-70cm including 4m £999.95



Icom IC-R30 All mode scanner £569.95

Yaesu FT-dx101D

SDR HF/50/70MHz 100W Transceiver top of the Sherwood list for SDR HF Tech!

£3149.95 After **CASHBACK** £3059.95



Yaesu FT-818ND

- 160m - 70cms 6W • Improved display
- Internal Battery • Rugged and Compact
- Auto Repeater Shift • FM Broadcast Receive

£599.95 After **CASHBACK** £529.95

Cashbacks valid until December 31st 2020

Full range of Yaesu products stocked. Call for Quotes

Professional Scanning and Monitoring from AOR



AR-DV1

Multimode digital demodulation receiver featuring wideband reception, D-STAR, Yaesu Fusion, DMR and much more.

£1199.95

AR-5700D

- 9kHz - 3.7GHz
- Multi-Mode
- Digital
- Video Out
- IQ Out

Professional communications receiver that offers a level of versatility and capability, beyond that of any similar receiver. See our website for full spec!

£4,595.00



AR-DV10

Advanced digital handheld receiver covering 100kHz - 1.3GHz. Latests firmware upgrade now adds comprehensive trunk monitoring.

£939.95



AL-811XCE Ameritron HF Linear Amp

Ideal for the UK Ham radio licence, 600W output and a perfect match for 100W transceivers, 6dB of gain on all bands, 3 low cost 811A tubes give you great efficiency and a clean signal. All you need is a single PTT line & RG input.

£1399.95

Hustler HF Verticals

4BTV

40m - 10m 4 Band vertical that will handle full legal power and can be ground mounted Height is 6.52m.

£199.95

5BTV

The ever popular 5-band model that covers 80m to 10m. This is a great backyard antenna that can be ground mounted. The height is 7.64m

£249.95

6BTV

This antenna is identical to the 5BTV above but has the 30m band added. Again it handles full legal power and stands 7.3m high.

£299.95

All antenna are rated at 1kW



Diamond TOP SELLERS!

Base Station Antennas

X-30PL.....2m 70cms Vertical 1.3m.....£49.95

VX-30N.....2m 70cms Vertical 1.3m.....£49.95

X-30N.....2m 70cms Vertical 1.3m.....£69.95

X-50N.....2m 70cms Vertical 1.7m.....£59.95

X-300N.....2m 70cms Vertical.....£109.95

X-300PL.....2m 70cms 3.1m.....£99.95

X-5000.....2m 70 & 23cm 1.8m.....£119.95

V-2000.....6m 2m 70cm 2.5m.....£109.95

X-510N.....2m 70cm 5.2m.....£141.95

F22.....2m Vertical 3.2m.....£69.95

F-23.....2m Vertical 4.8m.....£89.95

D-777.....Civil & Military Airband.....£69.95

Discone antennas

D-130.....25 - 1300MHz Tx.....£119.95

D-3000.....50MHz - 3GHz Rx.....£127.95

Mobile antennas

AZ-510FX.....Dual Band 0.92m.....£49.95

AZ-910.....6m 2m 70cm 0.95m.....£49.95

NR-770HB.....Dual band 1m.....£34.95

SG-7000.....2m 70cm 100W 0.5m.....£59.95

SG-7500.....2m 70cm 1.05m.....£59.95

SG-7900.....2m 70cm 1.58m.....£102.95

CLICK AND COLLECT NOW AVAILABLE AT OUR PORTSMOUTH STORE!
Please check our web site or YouTube channel for the latest news

www.hamradiostore.co.uk

Pay us a visit and check out our amazing demo facility

Sign up to our WEEKLY DEALS at hamradiostore.co.uk for exclusive deals and latest news

WATERS & STANTON
EUROPE'S HAM STORE

Contents

PRACTICAL WIRELESS

December 2020 Vol. 96 No 12

On sale: 12 November 2020

Next issue on sale: 10 December 2020

ISSN 0141-0857

Practical Wireless

Warners Group Publications plc
The Maltings, West Street
Bourne, Lincs PE10 9PH
www.warnersgroup.co.uk
Tel 01778 391000

Editor

Don Field G3XTT
practicalwireless@warnersgroup.co.uk

Designer

Mike Edwards
mike.edwards@warnersgroup.co.uk

Advertisement Manager

Kristina Green
01778 392096
kristina.green@warnersgroup.co.uk

Production Manager

Nicola Lock
nicola.lock@warnersgroup.co.uk

Production Assistant

Charlotte Bamford
charlotte.bamford@warnersgroup.co.uk

Marketing Manager

Katherine Brown
katherine.brown@warnersgroup.co.uk

Marketing Executive

Luke Hider
luke.hider@warnersgroup.co.uk

Publisher

Rob McDonnell
robm@warnersgroup.co.uk

Subscriptions

Subscriptions are available as little as £11.
Turn to our subscriptions page for full details.

Subscription Administration

Practical Wireless Subscriptions,
Warners Group Publications plc
The Maltings, West Street
Bourne, Lincs PE10 9PH
Tel: 01778 395 161
subscriptions@warnersgroup.co.uk

Components for PW projects

In general, all components used in constructing PW projects are available from a variety of component suppliers. Where special, or difficult to obtain, components are specified a supplier will be quoted in the article.

Photocopies & Back Issues

We can supply back issues, but we only keep them for one year. If you are looking for an article or review that you missed first time around, we can still help. If we don't have the actual issue we can always supply a photocopy or PDF file of the article.

Technical Help

We regret that due to Editorial timescales, replies to technical queries cannot be given over the telephone. Any technical queries are unlikely to receive immediate attention so, if you require help with problems relating to topics covered in PW, please either contact the author of the article directly or write or send an email to the Editor and we'll do our best to reply as soon as we can.



7 News

PW's monthly roundup of news from the UK and internationally, including new products, club news and recent events.

10 Review: Icom IC-705

Richard Constantine G3UGF brings readers the first review of the exciting new next generation IC-705 portable transceiver.

14 Review: – the Bantenna

Don G3XTT takes a look at an unusual portable antenna.

18 Dual Band Handie on the Cheap

Paul Beaumont G7VAK plays with a very cheap but perfectly serviceable handie-talkie from Baofeng.

22 World of VHF

Tim Kirby GW4VXE has been enjoying online links, including participating in the recent RSGB Convention.

26 2020 PW 144MHz QRP Fun Contest Results

Colin Redwood G6MXL has the results of the June 2020 2m QRP Fun Contest.

32 What Next

Colin Redwood G6MXL looks at starting on the data modes.

36 The Morse Mode

Roger Cooke G3LDI talks about a change of policy at CWops before discussing other Morse-related topics.



42 HF Highlights

Steve Telenius-Lowe PJ4DX asks whether we are seeing the start of the next solar cycle and has news of the Bonaire 10/10/10 event.

45 Christmas Quiz

Steve Telenius-Lowe PJ4DX has a quiz for the Christmas season.

46 Valve & Vintage

Scott Caldwell asks, "Who was the United Kingdom's First Female Amateur Radio Operator?"

48 Data Modes

Mike Richards G4WNC continues with his primer on operating FT8.

51 From the Ground Up

Eric Edwards GW8LJJ explains the basics of capacitance, in the first of two parts.

54 In the Shop

Harry Leeming G3LLL starts with headphones, which takes him to hearing aids, on to starting a shop and ending with diodes!

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Keylines



14

56 Kits and Modules

Not a kit as such, but **Geoff Theasby G8BML** repurposes a camera tripod.

58 Building the Walford Electronics Ivel Receiver.

Richard White G6NFE enjoys building the Ivel receiver from Walford Electronics.

61 Annual Index

The 2012 *PW* Annual Index.

62 Notes from a Small Station

Joe Chester M1MWD wonders why there is no replacement for the single-band VHF multimodes of old.

64 Christmas Quiz Answers

See how you got on!

66 Readers' Letters

Topics this month include entering the hobby, straight versus paddle keys (and is Morse dead?), QSLing and more.



42

Not a lot of radio for me this month although I have been participating in the RSGB Autumn Series contests on 80m on behalf of the Bristol Contest Group. The good thing about these is that they force me onto SSB and data modes, rather than sticking to my usual CW. I have found the data modes events to be quite interesting, with the mix of 'traditional' RTTY along with PSK63. These autumn series events also have a 'Le Mans' start, with radio silence to be observed for two minutes before the contest starts, which prevents people claiming and hanging on to a frequency before the official start time. It can make for fun and games as everyone jostles for a good spot once the contest starts!

I also did an 'interview' with the Norfolk club, via Zoom, which is available via their Facebook page. The event is very professionally managed by Club Chairman **David G7URP** and his wife **Tammy M0TC**, who were also the force behind one of the online streams of the this year's RSGB Convention (which, of course, was run in 'the cloud').

I didn't actually participate in the RSGB Convention, having had my fill of Zoom of late. I do understand that using Zoom opens such an event up to a much wider audience but, for me, these events are all about meeting friends and catching up – I do hope 'normal' service is resumed next year. Indeed, the organisers of the Friedrichshafen show have already pencilled in the usual June dates – let's hope it can go ahead.

Operating Away from Home

The results of the 2020 contest feature in this issue. You'll see that participation was down but those who took part found it an interesting 'challenge' to work from home with low power rather than from the usual hilltop locations. It's a reminder that much fun in amateur radio can be had by being out and about, whether for VHF and UHF activity, activating summits for the Summits on the Air programme, running special event stations, helping to run communications for a sporting event or whatever. For some, operating away from home is the only realistic option, to get away from local noise, to be able to put up reasonable antennas or for other reasons.



Fortunately, we can at least do some of these things once again although multi-operator activities are still out of bounds, except within families or with suitable social distancing. As I said above, it will be a blessed relief when 'normal' service is eventually resumed!

The Annual Index

Yes, not very exciting, but in putting together the annual index I was pleasantly surprised at how much ground we have been able to cover in these pages in the course of the year. I hope you have enjoyed the various articles and I can assure you that there are plenty more great articles in the pipeline.

Apologies

Once again I have to offer my apologies for carrying over some promised articles. However, this was due, in part at least, to being able to bring an early review of the IC-705. I know this rig has been eagerly awaited and is already causing great excitement and I am grateful to **Richard G3UGF** for pulling out the stops to do an early review for readers. He will follow up in the next month or two with a look at some of the accessories that are already available, both from Icom and from third-party suppliers. Some feature in this month's News pages.

And last but by no means least, a Happy Christmas to all of you!

Don Field

Editor, *Practical Wireless Magazine*

Read more radio news and reviews at www.radioenthusiast.co.uk/news

RECEIVE A FREE GIFT WORTH £39.99

Subscribe to RadioUser and save over 20% off the cover price. PLUS receive a **FREE** 2019 Archive CD

Pay just £3.67 an issue

(12 issues for £43.99)

PRACTICAL **WIRELESS**

www.radioenthusiast.co.uk


OCTOBER 2020 THE UK'S NUMBER ONE AMATEUR RADIO MAGAZINE SINCE 1932

RESISTORS & RESISTANCE | A look at their many uses



Archive CD's are also available separately at:
www.bit.ly/pw-2019archive

FREE
2019 Archive
CD worth
£39.99

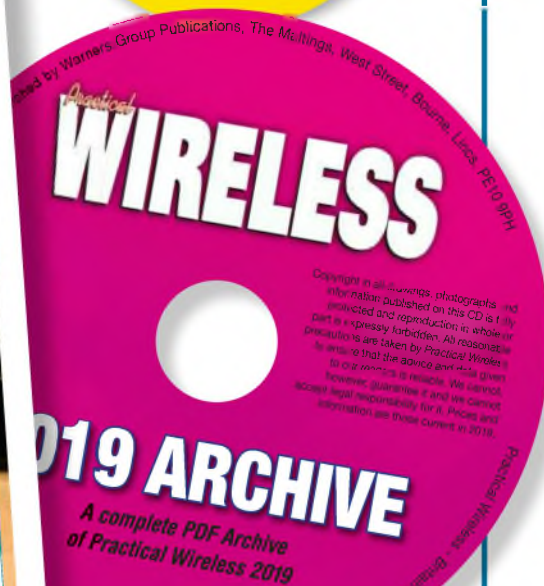

Call today on **01778 395161** and quote **PAWI/SUBS/20**

or go to www.radioenthusiast.co.uk/store to view all subscription offers

Telephone lines are open Monday to Friday 8am-6pm and Saturdays 9am-5pm.

Prices above are applicable to UK Direct Debit only. See website for EU and Rest of World Subscription Offers.

Newsdesk

Have you got something to tell our readers about? If so, then email practicalwireless@warnersgroup.co.uk



New Products at ML&S

Accessories for the newly-launched Icom IC-705 feature strongly this time. First is the MyDEL Quick Release Antenna Bracket. This is built from a solid billet of aluminium assembly & attaches to the side of an IC-705 allowing a larger PL-259 terminated antenna to sit vertically alongside the transceiver. ML&S realised that using the BNC connector fitted to the IC-705 for anything other than a terminated lead could possibly cause damage to the radio housing. Available from stock at £34.95

HamRadio.co.uk/QRAB

ML&S have also introduced a sturdy tripod stand to mount the Icom IC-705 on your shack table. Priced at £24.95, this lightweight alloy construction item has a locking swivel head system allowing you to position the transceiver to the correct angle for operation. The three legs have rubber feet, stopping the entire mount from slipping on the tabletop surface.

HamRadio.co.uk/IC705Tripod

ML&S have now received stock of the latest addition to covers for your rigs and accessories. This is the new IC-705 Cover from Prism. Hand-made and embroidered in the UK, these well produced covers are ready to ship at £27.95.

HamRadio.co.uk/IC705Cover

ML&S are now able to offer a total of 60 months warranty covering parts and labour for Icom's IC-705 portable QRP transceiver. The IC-705 is supplied with 24 months' warranty but for an additional charge a further three years is added to the end of the usual factory guarantee. "Many of

our customers have been requesting 5 year warranty on the IC-705 especially as it's aimed at out and about field work using portable antennas. As the rigs get more compact and complex, so do the repair costs in the event of a breakdown outside the limited warranty period", said Dan Lynch, Operations Director and eldest son of Martin Lynch. "It's as simple as ticking the check box on our website when purchasing the IC-705 and we think it represents excellent value considering just one trip to an approved workshop outside the 2 year guarantee could cost more than the one-off charge of the extended warranty".

Moving away from the IC-705, the new TyT TH-9800 Quad Band Mobile 50W 10m/6m/2/70cm FM transceiver is now in stock at ML&S. Compact and ideal for mobile or base station operation, the TH-9800 has a remote head, offers AM receive on Airband (108-136MHz) and 800 memory channels, Dual receive with Dual display. Available from stock £199.95.

HamRadio.co.uk/TH9800

Finally, Martin Lynch featured an interview with Expert Electronics from St Petersburg Russia on his weekly SFTW YouTube channel. This offers an insight into Expert Electronics on how it started, what new products may be in the pipeline, new updates happening in the near future and reasons they chose ML&S to be their UK distributor. Vasily and Roman from Expert talked to Gary Spiers, ML&S customer support manager, and Martin Lynch for over 30 minutes.

www.MLandS.tv

Read more radio news and reviews at www.radioenthusiast.co.uk/news



New Battery Pack from Icom

The BP-307 is a new high capacity 7.2V/3350mAh (typ.) Li-Ion battery pack designed for Icom's latest range of IP, LTE radio and selected amateur radio products, including the new IC-705 QRP SDR transceiver. The BP-307 is IP67 waterproof and offers considerably longer operating time.

The BP-307 is compatible with the following models: IP100H IP501H, IP503H, ID-31, ID-51 and the IC-705. It can be charged with the BC-202IP2, BC-202IP3L and VE-SP1.

The BP-307 is available for purchase from your local Icom dealer.

The Icom LC-192 is a new dedicated backpack specifically designed for the Icom IC-705. The multi-function backpack has many features, including space for an external antenna and cables as well as sufficient area to store your IC-705 and all your accessories.

On the top of the backpack is a separate compartment for the radio to sit securely in. Below that is a larger compartment to allow you to store accessories, including, power supply, batteries, cables, etc. An adjustable divider keeps everything well in order and secure.

The backpack is well padded with cushioning to protect the IC-705 and accessories from knocks. The back of the LC-192 is equipped with breathable padding (as well as the carrying straps) so that the LC-192 can be carried comfortably on longer outings.

A light plastic mounting plate is attached to the side, which allows the use of small portable antennas. There are also holes in the backpack to run cables. Alternatively, with the optional VS-3 Bluetooth headset you can use your IC-705 wirelessly.

www.icomuk.co.uk



SSB Electronics SP-400 from Nevada Radio

Nevada Radio have announced availability of the new SP-400 4m (70MHz) Low Noise Masthead preamplifier, from SSB Electronics of Germany.

The SP-400 is housed in a UV and weatherproof casing using N type connectors and with all mounting hardware supplied. It uses coax relays, which can handle up to 750W PEP when sequentially switched, or 200W PEP with VOX operation. The front-end has a noise figure of 0.7dB with gain variable from 9 to 18dB and is designed to handle strong signals without issue and be very stable. This is an ideal addition for the new data modes WJST, etc. where it can handle 400W sequential switching, or 100W VOX switching.

The SP-400 sells for £345.95 and is available from Nevada

www.nevadaradio.co.uk

RSGB Introduces Remote Invigilation

Following the success of the remote invigilation exams for the Foundation and Intermediate licence, the RSGB is now expanding that to include Full licence exams. The automated booking system will now accept exam bookings for all three licence levels. It is important to read the Candidate Instructions before booking an exam. You can find a link to these and the calendar to book your exam on the website:

www.rsgb.org/exampay

New RSGB Videos

The RSGB has launched a series of videos to help the thousands of people who have taken their Foundation exam via remote invigilation while being unable to take the practical assessments.

The full 30-minute video highlights six practical skills and each segment stands alone rather than being part of a single 'story' through the video. As well as this whole video, the Society has published the different segments as separate short videos to make it easier to go back to just one or two parts.

The RSGB is grateful to the clubs and individual radio amateurs who have created other available online training resources. With the launch of these videos, the Society is now pleased to add to the resources that new licensees have available to them. The RSGB would like to thank everyone involved in making these videos, including **Bob** and **Nick** from TX Factor. You can watch the videos on the Society's website at:

www.rsgb.org/foundation-practicals

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Visit our Book Store at www.radioenthusiast.co.uk

BOOKSHOP BESTSELLERS



RadioUser 2020 Archive CD

All issues of Radio User published in 2020 available on a handy CD Rom.

PRE-ORDER Available mid/end January

£39.99 plus p&p

Subscriber price £19.99 plus p&p



Practical Wireless 2020 Archive CD

All issues of Practical Wireless published in 2020 available on a handy CD Rom.

PRE-ORDER Available mid/end January

£39.99 plus p&p

Subscriber price £19.99 plus p&p



World TV Handbook

This is the 74th edition of World Radio TV Handbook and this great directory continues to offer the most comprehensive guide to broadcasting on the planet.

£35.99 plus p&p



Raspberry Pi Explained

Raspberry Pi Explained guides you through step-by-step instructions to get the Pi working for you.

£15.99 plus p&p



Software Defined Radio

Software Defined Radio is intended for radio amateurs, short wave listeners or anyone interested in radio technology.

£14.99 plus p&p



Scanners 7

Covering the rapidly increasing trend towards digital two-way radio communications and the latest handheld and mobile/base scanners with some digital modes fitted.

£9.95 plus p&p



Six & Four

Covering everything from the history of these bands, through the choice of equipment and antennas to operating, both from home and elsewhere.

£13.99 plus p&p



Callseeker Plus 2021 CD

Easy to use and far more up to date and accurate than some online callbooks the Callseeker Plus 2021 is the ONLY product that provides the very latest UK and Northern Ireland callsign data and European callsign data too

£18.99 plus p&p



RSGB Yearbook 2021

Over 90,000 callsigns as well as Special Contest Calls, Permanent Special Event Callsigns and Repeater, Beacons. Over 50 sections and over 170 pages of information

£19.99 plus p&p



Radio Today Guide to the Icom IC-9700

This book provides easy to follow instructions on how to get the most out of the Icom IC-9700. From troubleshooting, modifications and links to extend your knowledge.

£15.99 plus p&p



Radio Today guide to the Icom IC-7300

This book provides easy to follow instructions on how to get the most out of the Icom IC-7300. From troubleshooting, modifications and links to extend your knowledge.

£13.99 plus p&p



Radio Today guide to the Icom IC-7610

This book provides easy to follow instructions on how to get the most out of the Icom IC-7610. From troubleshooting, modifications and links to extend your knowledge.

£13.99 plus p&p



Practical Wireless 2019 Archive CD

All issues of Practical Wireless published in 2019 available on a handy CD Rom

£39.99 plus p&p



Practical Wireless 2019 Archive CD

All issues of Practical Wireless published in 2019 available on a handy CD Rom

£39.99 plus p&p



Practical Wireless 2013 Archive CD

All issues of Practical Wireless published in 2013 available on a handy CD Rom

£39.99 plus p&p



Radio User 2011 Archive CD

All issues of RadioUser published in 2011 available on a handy CD Rom

£39.99 plus p&p



Radio User 2012 Archive CD

All issues of RadioUser published in 2012 available on a handy CD Rom

£39.99 plus p&p



Radio User 2013 Archive CD

All issues of RadioUser published in 2013 available on a handy CD Rom

£39.99 plus p&p



ORDERING IS EASY or call **01778 395161**
at: www.radioenthusiast.co.uk/store/bookshop

Browse the full Archive CD Collection at bit.ly/cdarchive



1

Practical Wireless Rating



Features and benefits wise, ease of use and for its future potential, it's got to be, 4.9.

Richard Constantine G3UGF
practicalwireless@warnersgroup.co.uk

Icom IC-705

We bring readers the first review of the exciting new next generation IC-705 portable transceiver.

Icom Incorporated, Japan has come a long way since **Tokuzo Inoue** founded his small radio company in 1954.

With a thousand plus employees and a worldwide presence in most sectors of mobile communications, Icom's global footprint is massive. It's always had a reputation for innovation and in the Amateur Radio market, for being just a little different.

Priding itself on attention to detail rather than marketing hype, Covid 19, component and shipping delays, have contributed to extra excitement for the long-awaited release of the IC-705. Indeed, it's now more than a year since I first discussed reviewing this radio with *PW's* Editor.

Chinese offerings aside, Yaesu and Elecraft already have feature-rich QRP radios with excellent pedigrees so, what's different about the IC-705?

Multimode and More

Firstly, it's a full featured, multimode portable radio, covering all bands, 1.8MHz to 440MHz, including 5MHz and in the UK, receive-only 70MHz. It's a direct RF sampling, SDR transceiver utilising down-conversion IF

sampling for 25MHz and above.

RF signals pass through dedicated filters, to the Analogue-to-Digital Converter (ADC) and are processed in the low-noise, Field Programmable Gate Array (FPGA) – excellent for weak signal recovery. While there are some technical differences to big brother IC-7300, the end result to the naked ear is the same, as side by side comparisons proved. It incorporates passband tuning and there are no extra filters to buy. Indeed, the radio auto-selects the appropriate filter bandwidth when switching modes.

Pack in GPS, digital voice gateway (DV), D-STAR, FM Radio, Wireless LAN, Bluetooth, Airband Rx, RTTY Tx/Rx, colour touchscreen, 500 memories, 2,500 repeater memories and, of course, the real-time, point and jump frequency waterfall/spectrum scope display and you begin to get a sense of why this

radio really is 'next generation'.

The micro-SD slot accepts a 2GB card or a 32GB SDHC card activating 13 additional features. They include receive logging, voice recording, RTTY decode log, screen captures, picture sharing, GPS memory and more.

First Impressions and Comparisons

Opening the package, Icom's attention to detail raised a smile. Inside, a small slip of paper detailed exactly how to, and how not to, remove the radio from the box!

Though I suspect many 705s will happily spend much time at home, weight is important for serious portable operations. It weighs 1.185kg, with standard battery attached. That's 185g more than the steel-cased, fully-loaded Elecraft KX3, of the same but shallower footprint. Surprisingly, both

Sign up to our **FREE** email newsletter at www.radioenthusiast.co.uk



Fig. 1: The IC-705 **Fig. 2: Some of the external connections.** **Fig. 3: An IC-705 is one third the size of an IC-7300.** **Fig. 4: In the car.** **Fig. 5: An internal view.** **Fig. 6: The menu system will be familiar to users of the IC-7300 or IC-9700.**

weigh less than a Yaesu FT-817 at 1.280kg. Incidentally, the IC-705 fits snugly into the same padded KX3 bag by Windcamp, for easy carrying and protection.

Power Consumption

Unlike the competition, its BP-272, 7.4V 1880mAh Li-ion battery is external to the radio. It simply clicks on the back and is easily changed. RF output auto-limits to 5W, unless external power is connected. Charging takes around 2.5 hours, a little longer when 12V is connected and the radio in use.

Excellent for QRPP or FT8 data, transmit power is adjustable from 0.5-10W. An external 5A DC supply is recommended. Switching on, the radio displays battery voltage and has a permanent three block icon, on-screen. The A grade battery cells are excellent operating down to around 6V, before falling off a cliff and shutting down.

With everything on, receiver consumption measured 288mA. Switching off the GPS, wireless Lan and Bluetooth reduced it to 177mA. There's an adjustable screen saver but surprisingly the screen only consumes around 40mA. When portable you can freeze the GPS co-ordinates on the memory card and switch off GPS to conserve energy.

Owners of ID51 and ID52 portables will welcome the 705's battery compatibility. There's also a 3150mAh, BP307 battery available, but it's not cheap.

Microphone Choice

A compact speaker/microphone is provided. While not a full keyboard it does have up/down controls for frequency or memo-

ry channel change, plus two additional programmable buttons.

All external connections are located on either side of the unit and protected by rubber covers. Having no front or rear connections creates space for the large colour display and the excellent sounding speaker. The quality of received audio came as a pleasant surprise, for such a small transducer.

FM reports indicated microphone quality to be acceptable but understandably somewhat 'toppy' compared to a Bluetooth headset, but likely to be an advantage on SSB. Bluetooth works with a wide range of devices. I was easily able to connect a Yaesu SM-10 and use its PTT. Icom have their own version.

A small quirky microphone hanger and strain relief plate is provided. It attaches to the earth screw point. There's a DC cable and spare 4A fuses, plus four adhesive rubber pads (feet) that you fit yourself.

Handbooks

The manual labelled *Transceptor de Modo* brought back happy memories of the iconic *Fast Show*, until I realised it comes in five languages and I found the English version.

As a reviewer I'm a great believer in the maxim, 'if all else fails, read the handbook'. However, I do want to experience how intuitive a piece of equipment is with no preconceptions or knowledge.

I have to say the IC-705 scores very well in this area. It's quite easy to navigate and most importantly for a complex device, remember how to use. Icom has successfully minimised the number of sub-menus, with frequent user choices spread across top levels of the on-screen display.

Sub-menus are mostly limited to options that, once set, need little or no further attention. Yes, it most certainly helps if you've experienced the IC-7300 but, you soon learn

that the IC-705 is not quite the same thing.

With several controls fewer, some options and functions are accessed only by the display. Pressing either the menu or the function buttons reveals that each has two pages to choose from. The buttons that remain are all appropriate but some are double-purpose according to the mode in use.

I particularly like the XFC button that allows checking of your transmit frequency when using a repeater or when working split frequency, in a pile-up.

The short handbook is more user friendly than most and has clearly labelled sections. I couldn't find clear information about setting up for repeater use. Eventually I discovered by trial and error that CTCSS tone and shift settings were on separate pages of the function display, but it took some time to figure it out.

The basic handbook devotes some 18 pages to set mode along with infrequently changed functions that customise the radio, for personal convenience.

I strongly recommend owners or potential owners, to download the 212-page full manual from the Icom website. It not only fills in holes from the basic manual but provides much more information and some surprises. Detailed sections, with easy to follow screen-shots, cover scanning, voice memories, audio recording, advanced GPS use linking with digital positioning data, Wireless Lan, DV gateway function, basic and advanced D-STAR operation – much needed by this reviewer. There's a section on interfacing the radio to a computer for RTTY and data transmission. I suspect that interface modules/cables will be available very shortly from third party providers, if not already.

Practicalities

Ergonomically the IC-705 is a bit of an oddity. It sits flat on a desk and you can't see the





display. Initially, I had it on its back before placing it on a shelf. The upper and lower rear case edges are bevelled at 45°. Angling it back looked OK, until I pressed the front screen and it repeatedly fell backwards. Investigating the underside revealed an industry standard AMPS pattern of four M4 threaded screw holes, for a mounting plate, not provided.

Additionally, there's a larger, central threaded socket, known in the trade as a 1/4in, 20 UNC thread. A wide range of photography brackets or tripods will fit, securing and adjusting to suit, but perhaps not as neatly as a proprietary stand.

It puzzles me why Icom failed to include any kind of angled stand, bail arm or flip-down leg arrangement. No matter, the third-party after market is on the case. Watch this space. It's somewhat annoying, though, and I can't stop thinking this is something of a gaff on Icom's part for a high-end radio.

Antennas and Tuning

Critics comment that there's no automatic tuner. To me the simple answer is, with all this tech there's no room left in the box. Do you want a bigger box? A resonant antenna on VHF or UHF presents little problem. For HF a pre-tuned antenna, simple ATU or balun transformer arrangement works. There are plenty of ATU options available in kit form or ready built. There's the usual internal SWR monitor and a superb SWR colour plot function showing SWR bandwidth.

The radio is built on a complex alloy cast housing and metal bracket arrangement attached to which is a small earth terminal bolt, below the BNC antenna socket. It only has a small diameter and a short thread. It's potentially and easily lost when out portable. A wing nut or flying lead might be a better idea.

How Well does it Perform?

I've been a QRP enthusiast for many years and you develop a sort of mindset, particularly on lower frequencies. It's easier to call a station than call CQ, unless you're on the QRP frequencies. Antenna efficiency is key

to maximising power out.

Low noise locations in the countryside are ideal for QRP. Often bands still have good DX potential in low noise locations, when apparently closed in urban environments.

For VHF/UHF 5 or 10W is more than adequate with little problem using repeaters and digital modes, even with reduced power.

It's early days but I've operated on battery power for extended periods on FM nets and repeaters, 3-4 hours on CW and SSB depending on transmit-to-receive duty cycle.

The CW keying waveform is crisp and clean and break-in works well. My paddle key settings first came up as reversed, an easy menu fix. SSB operation requires a little compression, but not too much and none for FM.

Thoughts

Judging by early sales this radio is already another Icom success story. It appeals to Icom fans and IC-7300 owners. It's appealing for outdoor use, but I suspect some traditionalists might think it too high-tech for hiking to SOTA summits.

Consider this. To date we've seen manufacturers producing remotable head radios, but retaining the clever bits in the main body, with an amplifier and in some cases a tuner. Does Icom's philosophy of being a little different now mean they intend to turn this on its head?

SDR potentially makes it practical to have a comprehensive grab and go QRP radio for portable. Plus, in the not too distant future, an add-on, home and mobile use, 100W amplifier/tuner, possibly repackaged from the IC-7300. Hold that thought.

Things I like, some I don't

What I like:

- The GPS automatically sets the clock for the log, when switching on – great.
- SWR and bandwidth plotting on-screen, excellent for portable, compromise antennas.
- Quality internal speaker gives good sound.
- Love watching the on-screen TX/RX audio monitor display.
- BNC antenna socket.

- Easy battery swap and compatibility with other models makes for a really good operating experience

What I am less enamoured with:

- No adjustable stand, perhaps a serious omission.
- Stock microphone transmit audio bandwidth a little restricted.
- Received audio bandwidth on speaker mic – I've heard better.
- Earthing bolt arrangement, could be improved.
- Black and white stripe, DC lead, give me Red and Black, any day.
- ± tags, very close to DC cable open end, likely to be removed.
- Glass fuses easily damaged but not easy to obtain in the field.

NB: suggest, mini blade fuses as used in cars tougher and widely available.

Finally

For the first time I have to consider splitting my personal 5-star rating scale.

Features and benefits wise, ease of use and for its future potential, it's got to be, 4.9.

Physically, I'd describe it as a high-end transportable and a solid brick of a radio, but would definitely insure it and consider extended warranty.

There's no pretence of being rugged, but I appreciate that's not its marketplace.

The internal casting offers some protection and perhaps the cosmetics can be replaced, but there's the stand issue, for this category it's 4.7.

Overall, it's 4.8 stars but, for innovation and future potential it's got to be heading for a 5.

Next time I'll be exploring accessories and after-market products for the IC 705.

My thanks to the ML&S team for a quick launch day delivery, to give a head start on this review. The IC-705 sells for £1300 and is available from most UK amateur radio retailers.

The full specification, software downloads and more are available on the Icom website: <https://tinyurl.com/y2tqyk3n>

Enjoy great receive audio with... **bhi** ...a **bhi DSP noise cancelling product!** **ParaPro EQ20 audio DSP range with parametric equalisation**



- Powerful high performance audio processing system
- Greatly improved audio for those with hearing loss
- 20W audio and parametric equalisation on all units
- Separate DSP noise cancelling and Bluetooth versions
- Simple control of all DSP functions
- Two separate mono inputs or one stereo input
- Use with passive speakers or headphones
- Basic EQ units EQ20 £159.95, EQ20B* £199.95
- DSP noise cancelling versions EQ20-DSP £259.95, EQ20B*-DSP £299.95 * Denotes Bluetooth on input

"easy-to-use device that improves the audio clarity of amateur signals" EQ20B-DSP QST Dec 2019 review

High-performance audio processing...

...with first-class DSP noise cancelling...

...for a great listening experience

Dual In-Line New lower price £179.95



Fully featured flexible dual channel DSP noise cancelling unit - 8 Filter levels 9 to 40dB - 3.5mm mono or stereo inputs - Line level input/output - 7 watts mono speaker output - Headphone socket - Suitable for all types of radio incl' SDR - Easy to use controls for quick and easy operation - Enjoy clear intelligible "noise-free" speech from your radio - Replacement for bhi NEIM1031 In-Line

New NES10-2MK4 £119.95

- New improved NES10-2MK4
- 5W audio power & the latest bhi DSP noise cancelling (8 to 40dB)
- Up to 65dB tone reduction - Single switch on top of speaker for power, audio and DSP for ease of use
- Power on, filter on and audio overload LED



Compact In-Line £179.95



Easy to use in-line DSP noise cancelling unit with simple rotary encoder control of audio and functions

- Powerful high-performance audio processor
- Unique DSP noise cancelling technology - Lowlatency of 32ms
- Remove noise and interference - Hear weak signals clearly
- Rotary encoders perform all functions
- Easy to use with "real time" adjustment
- Use with headphones or a loudspeaker
- 3.5mm line level and speaker level inputs

New DESKTOP MKII £199.95

Now includes the latest bhi DSP noise cancelling technology for even better receive audio!


- 10W Amplified DSP noise cancelling base station speaker
- Easy to use controls
- 8 DSP filter levels
- "Real time" audio adjustment
- Suitable for all radios incl' SDR
- Headphone socket
- Speaker level and line level input sockets



Check out our range of extension speakers, headphones, audio cables and adapters!

bhi Ltd, Burgess Hill,
 RH15 9RR, UK

Tel: 01444 870333 - www.bhi-ltd.com



EA&O

Don Field G3XTT

practicalwireless@warnersgroup.co.uk

The Bantenna sleeve antenna, launched recently by David G4YVM of bantenna.co.uk, is something a little out of the ordinary, which is why I wanted to take a look. What is it? The antenna is 'knitted' into a nylon sleeve, Fig. 1, that slips over a 7m fibreglass pole, making for a very quick and easy portable installation. And because it doesn't look like an antenna, your neighbours on the campsite won't have a clue what it is you are up to! The antenna wire is 'knitted' into the sleeve, with just a short length protruding at the bottom to connect to the Unun transformer, which comes in a plastic box and with a Velcro tape to attach it to the mast. The connector is a BNC type.

And that, in a nutshell, is the Bantenna!

In Use

The selling point of the Bantenna is clearly that it is easy to put up and take down in a portable situation so I wasn't really expecting anything remarkable by way of performance. But it does claim to be usable on all bands 160 through 6m (really, thinks I?) with a power rating of 100W.

Because it is just a nylon sleeve, the antenna packs up very small although you do need a 7m fibreglass pole to support it. My first attempt was to use a SOTABEAMS Tactical Mini pole, because this collapses down very small, but unfortunately to do so it has more sections than a typical 7m pole and the lower sections were too chunky for the sleeve antenna to slide over them (I should mention that the guidance with the Bantenna is to remove the thin top section of your fibreglass pole, because it will probably damage the nylon sleeve). Fortunately, I also had a 7m fishing pole (bought for radio use but a fishing pole, for sure, because it still had the ring for the fishing line in the end of the top section!). The Bantenna slid nicely over this (there is a pull strap at the bottom to enable the user to pull the antenna evenly and another at the top for removing it after use).

(I should also mention at this point that the Bantenna normally comes with a suitable fibreglass pole but I had passed on this for the review because I knew I had suitable poles available)

My next challenge was supporting the pole. Bantenna do sell a lightweight guying kit but in my case, trying it out from home, I hammered an old broom handle into the lawn and slid the pole over it, Fig. 2.



The Bantenna

Don G3XTT takes a look at an unusual portable antenna.

As I said, the termination is for a BNC connector rather than PL259, Fig. 3. This shouldn't be a problem if you plan to use a Bantenna regularly – make up a suitable coaxial lead with BNC on one end and long enough to reach your car, caravan, tent or whatever.

Checking SWR

First job, before running 100W into the antenna, was to check the SWR on all bands, at low power. While I know that using a Unun does help to hide the 'true' SWR of an antenna, I was pleasantly surprised at what I found. My measured

results are shown in Table 1. In general, as you will see, SWR was 1.75:1 or less on most bands. The exceptions were 1.8 and 21MHz, where in both cases the SWR was close to 4:1. This put it outside the tuning range of the ATU in my IC-7300 although well within the tuning range of my Elecraft K3 (which can handle SWRs of up to 10:1). The SWR other users will see will depend to an extent on the length of coax they use to tune it, but I wouldn't expect it to depart significantly from the figures I was seeing.

Suitably reassured, I tuned around the bands and was pleased to note the strength of received signals, better

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk



Fig. 1: The antenna on arrival.

Fig. 2: Connections to the Unun.

Fig. 3: The antenna in use.

than I was expecting, recalling as I did a commercial multiband vertical that I had looked at a while ago that had SWRs that were all over the place and that seemed to be little more than a dummy load by way of performance. So, would the Bantenna work in reverse, i.e. on transmit?

My first excursion was on 20m CW, where I raised R125SE (some sort of Russian special event call) first call, followed shortly by a QSO with EA6NB in the Balearics. Given that the Bantenna is designed primarily for portable convenience and certainly not to compete with the typical home station antenna, and that it doesn't (apparently) require an earth connection, despite being a vertical, this was an encouraging start. The following day, in the CW Ops CWT event I worked 33 stations in an hour, split between 20 and 40m, in 11 countries, including across to Canada and the mid-west of the USA.

While not a definitive result (depends on band conditions, the stations at the other end, etc), I believe this was a good endorsement of the antenna.

Performance on the other bands was similar – not bad for a relatively short vertical without radials.

Conclusion

When I am out portable, my preferred solution is usually to use a fibreglass pole to support wire antennas, either a half-wave dipole, or quarter-wave verticals. This works well but has the limitation that I can only operate one band at a time. The



Bantenna is truly a multiband solution, easy to set up and doesn't obviously look like an antenna. And, in any case, it comes with a fibreglass pole that you can also use for other purposes.

There is a handy video on the Bantenna website, showing how to use the antenna. The Bantenna, complete with Unun and 7m supporting mast costs £125, or £95 without the pole. A three-point guying system is available for £15. Alternative colours are also available - black and 'emergency orange'. Order online: www.bantenna.co.uk

Freq (MHz)	SWR
1.8	3.7
3.5	1.1
3.8	1.3
7	1.4
14	1.6
18	1.6
21	3.7
24	1.6
28	2.1
29.5	1.6
50	1.6

Table 1: Measured SWR

Read more radio news and reviews at www.radioenthusiast.co.uk/news

MOONRAKER

ONE STOP HOBBY RADIO SHOP

Moonraker UK Limited, Cranfield Road, Woburn Sands, Bucks MK17 8UR Open Monday-Friday 9:00-5:00pm

Sales line 01908 281705

E-mail sales@moonraker.eu   

Package (UK Mainland Only): Small items just £2.99
Medium items just £4.99 Maximum charge just £5.49

www.moonraker.eu  

AnyTone

A company with more than 25 years experience of research, production and sales in the wireless communication equipment industry. Main products include Digital and Analog Portable Radio/Mobile Radio/Repeater and System, 3G/4G POC Radio and System, CB Radios, Marine Radios, GSM/CDMA/DCS/PCS/3G Repeater & other wireless communication devices & Industry application solutions.



166 WATTS

Mobile Transceiver

AT-778W Dual band FM mobile 2m/70cm radio (136-174MHz & 400-490MHz) 25 Watts, 250 channels **£99.95**
AT-5189 Single band FM mobile 4m radio (68-88MHz), 25 Watts, 250 channels **£169.99**
AT-588 Single band FM mobile 4m radio (68-88MHz), 40 Watts, 200 channels **£169.99** **£149.99**
AT-5555S Single band AM/FM mobile 10m radio (28-29.700MHz) 30 Watts **£169.95** **£159.95**
AT-6666 Single band AM/FM/USB/LSB 10m radio (25.615-30.105MHz) 60 Watts **£199.99** **£169.99**
AT-D578UV Pro FM/DMR mobile radio This AT-D578UV-Pro is a true TWIN band radio for digital DMR radio systems, compatible to MO-TOTRBO Tier 1 and 2. Traditional DMR is of course equally supported. In contrast to many other DMR radios the AT-D578UV offers real VFO operations, which makes it much more suitable for amateur radio. Here you can adjust frequency and other parameters as you are used from traditional radios, instead of just using pre-programmed memories. Ofcourse the AT-D578UV offers these memories as well, quite a lot: 4000 to be precise. But you are not limited to those memory channels. **£349.99**

GJ-0485 power supply
for Anytone D578UV
£119.99



Handheld Transceiver

AT-D668UV handheld radio is a VHF and UHF radio with both Digital DMR (Tier I and II) and Analog capabilities. Includes GPS Offering a total of 4,000 channels (Analog and Digital), 10,000 Digital Talk Groups, and up to 150,000 contacts, as well as multiple DMR ID numbers (Radio IDs) for a single radio. **£129.95**
AT-D678UV PLUS BLUETOOTH Digital DMR Dual-band Handheld Commercial Radio with Roaming and GPS VHF/UHF Dual-band Digital/Analog Port 90 DMR commercial transceiver with 1.77 inch colour TFT display and GPS. This model includes DMR Roaming, faster processor and larger memory for future enhancements. Ideal for Fire, Search & Rescue, EMS, Police, Sheriff, Forestry and Security operations. Frequency coverage 140-174 / 400-480 MHz **£199.99**

Accessories

CPL-02 Battery eliminator for AT-D668UV **£9.95**
CPL-01 Car charger for AT-D668UV **£8.95**
CPL-05 Speaker microphone for AT-D668UV **£19.99**

VGC



158 WATTS

Vero Global Communications company is a science and technology enterprise in Fujian Province, specializing in R&D, production and sales of electronic products and accessories such as radio communication equipment, alarms, radio frequency smart cards, and GPS equipment.

Mobile Transceiver

VR-N7500 is a brand new 50 watt VHF 40 watt UHF Headless mobile transceiver with a solid build quality. It is very different in design compared to any other radio used mobile or base. The VR-N7500 uses a smartphone as a control panel and the body is installed in the boot or similar with the mobile phone connected to the body through Bluetooth. The car hands-free intercom can be utilised through the vehicle Bluetooth and PTT is by the supplied Bluetooth PTT **£189.95**

BAOFENG

Started in 2001, Baofeng has always been aiming at creating user value and innovating products. From the first small factory of more than 30 people, Baofeng has developed into a high-tech enterprise specializing in R&D, production, sales and after-sales service of handheld wireless walkie-talkies as well as accessories.



24 WATTS

UV-9R PLUS DUALBAND HANDIE

140/174/400-470MHz, IP67 waterproof & dust-proof (Not diving), Relay Forwarding Confirmed, Dual Band, Dual Display and Dual Standby, High & Low Power Switchover. Everything you need for just £34.95!

NEW JUST IN

Handheld Transceiver

UV-59C PLUS Latest version of this ever popular dual band handie - and now with a 4.5W on 2m - Comes complete with desktop charger, antenna, belt clip & high power 1800mAh battery **£29.95**
BF-888S is a professional UHF transceiver with good performance and reliable quality. Extra functions such as Noise Reduction and Scrambler make it as a cost-effective transceiver covering 400-470MHz and including desktop charger for an amazing **£12.95**
DM-9HX DMR radio Tier II VFO digital & analogue dual band UHF/VHF handheld transceiver **£89.95** **£69.95**

Accessories

UV-55M Branded speaker microphone for all listed Baofengs **£9.95**
UV-5PC Branded software cable with USB for all listed Baofengs **£9.95**
UV-5BE Original battery eliminator for UV-5RC+ **£9.95**
UV-5AT Original replacement antenna for UV-5RC+ **£4.99**
UV-EP Original replacement ear piece for UV-5RC+ **£4.99**
UV-5SC Original soft case for UV-5RC+ **£9.95**
BL-5 Original 1800 mAh replacement or spare battery for UV-5RC+ **£9.95**
GT-5 Original GT-5 2000 mAh replacement or spare battery for GT-5 **£14.95**
GT-3 Original GT-3 1800 mAh replacement or spare battery for GT-3 **£12.95**
BF-8 6 way charger for BF-888S **£44.95**

LEIXEN



58 WATTS

Leixen having developed a full range of "LEIXEN" series of radios, widely used in transport, construction, telecommunications, security, restaurants, residential property management and other departments and areas, especially popular in the HAM's world.

Mobile Transceiver

VV-888 136-174/400-470MHz mobile transceiver. What a great entry level dual band rig, with only 10 Watts it is ideal for the new foundation pass holders. Comes complete with radio bracket and keypad microphone **£59.95**
VV-998S as above but with 25 Watts **£69.95**

Handheld Transceiver

NOTE is a rugged 400-480 MHz handheld transceiver with a massive 20W output! Comes complete with antenna, belt clip and drop in charger - are you ready to be heard! **£69.95**

SenHaiX

SenHaiX was established in 2012 and is located in the hometown of two way radio Quanzhou city, Fujian Province, China. The company is a high-tech enterprise specialising in radio communications R&D, manufacture of two way communications and accessories.



54 WATTS

Handheld Transceiver

8800 Dual band, dual watch, dual standby, 5W Sport radio. This is a rugged and reliable, waterproof, dustproof and shatterproof handie with lots of extras including bluetooth programming option - amazing value at just **£69.99**
New SenHaiX 8800 5W Dual Band Sport Two-way Radio Waterproof Handheld Radio with VOX Function - includes a host of features such as dual band, dual standby, 128 channels, waterproof, VOX, Eco Mode, Scan Function, FM Radio, PPT ID and Automatic backlight plus more **ALL FOR JUST £59.95**

Inrico

Inrico Electronics is a high-tech enterprise which focuses on the design, construction, production and sales of radio communication equipment.

Mobile POC Network Radio

TM-7 PLUS is the first 4G mobile network Radio. Great for amateur radio use with the new IRN platform, for Zello, Team Speak 3 and Echolink via 3G or WiFi. And it works as WiFi hotspot too! **£159.95**



141 WATTS

Handheld POC Network Radio

T199 is a 3G / WiFi Android Radio, without display, for basic operation. You can install apps from your computer to the radio via the USB port. Great network radio at a great price **NEW LOW PRICE £79.95**
T192 is an IP-67 rated 3G / WiFi Android Radio as above but with the IP rating **NEW LOW PRICE £99.95**
T320 is the current best seller 4G / WiFi Radio. It has a host of features and a great screen including intelligent global intercom, front & rear camera with auto-focus function, Standby time more than 80 hours, 36mm-dia speaker with double chambers, Positioning system supports, Support WiFi, Micro Spindata cable, Support MP3 / MP4, Sturdy and durable with military quality. **NEW LOW PRICE £149.95**

ICOM



2000 WATTS

Icom IC-705 All Mode Portable Radio £1299.95
NOW SELLING FROM STOCK !

RFinder B1 Dual Band DMR 4G/LTE BACK IN STOCK £999.95



Mobile Antenna Mounts

TMMAG-S Triple magnetic mount with S0239 antenna fitting with 4m RG58 and PL259 fitted – ideal for those larger antennas..... **Just £39.95**
TURBO-S Single 170mm magnetic mount with S0239 antenna fitting with 4m RG58 and PL259 fitted – will suit most antennas upto 5ft..... **£19.95**
HKTHD-S0 Heavy duty hatch back mount with S0239 antenna fitting with 4m RG58 and PL259 fitted..... **£32.95**
HKTHM-S Mini hatch back mount with S0239 antenna fitting with 4m RG58 and PL259 fitted..... **£32.95**



Multiband Mobile

Why buy loads of different antennas when Moonraker has one to cover all! SPX series has a unique fly lead and socket for quick band changing

SPX-100 9 Band plug n' go portable, 6/10/12/15/17/20/30/40/80cm, Length 165cm retracted just 0.5m, Power 50W complete with 38ft PL259 or BNC fitting to suit all applications, mobile portable or base - brilliant!..... **£44.95**

SPX-200S 8 Band plug n' go mobile, 6/10/15/20/40/80cm, Length 130cm, Power 120W, PL259 fitting..... **£44.95**

SPX-300S 8 Band plug n' go mobile, 6/10/12/15/17/20/30/40/80cm, Length 185cm, High Power 200W, PL259 fitting..... **£59.95**



VHF/UHF Mobiles

GP151 Glass Mount 270cm, Gain 2.9/4.3dBd, L 78cm complete with 4m cable and PL259..... **£29.95**

NRH-100 MICRO MAG 270cm, Gain 0.5/3.0dBd, L 55cm, 1" magnetic base with 4m coax and BNC..... **£19.95**

NRH-70 270cm, Gain 0.3/0.4dBd, L 50cm, 3/8" fitting..... **£9.95**

NRH-777 270cm, Gain 2.8/4.8dBd, L 150cm, 3/8" fitting..... **£19.95**

NRH-525 270cm, Gain 0.5/3.2dBd, L 43cm, PL259 fitting (high quality)..... **£19.95**

NRH-504 270cm, Gain 3.2/5.8dBd, L 95cm, PL259 fitting (high quality)..... **£28.95**

NRH-754 270cm, Gain 5.5/8.0dBd, L 150cm, PL259 fitting (high quality)..... **£38.95**

NRH-804 6/270cm Gain 3.0/8.0/5.0/7.5dBd, L 150cm, PL259 fitting (high quality)..... **£39.95**

NRH-273 270/23cm Gain 3.5/5.5/7.5dBd, L 85cm, PL259 fitting (high quality)..... **£49.95**

NRH-904 108/270cm Gain 10m (2.15dB) 8m (2.5dB) 2m (2.8dB) 70cm (5.5dB) L 125cm PL259 fitting..... **£49.95**



Coax Cable Drums

Save money buying in bulk – handy 50m as well as 100m drums at discounted prices

RG58-D-DRUM-50 standard RG58 6mm 50m reel..... **£19.99**

RG58-D-DRUM-100 standard RG58 6mm 100m reel..... **£29.99**

RG58M-DRUM-50 military spec RG58 6mm 50m reel..... **£24.95**

RG58M-DRUM-100 military spec RG58 6mm 100m reel..... **£44.95**

MM8-DRUM-50 military spec MINI-8 7mm 50m reel..... **£34.99**

MM8-DRUM-100 military spec MINI-8 7mm 100m reel..... **£64.99**

RG213-DRUM-50 military spec RG213 9mm 50m reel..... **£64.99**


RG213-DRUM-100 military spec RG213 9mm 100m reel..... **£119.99**

WESTFLEX-DRUM-100 military spec Westflex 103 10mm 100m reel..... **£198.99**

RG174-DRUM-100 military spec RG174 2.8mm 100m reel..... **£58.95**

FORMULA-ZERO 100m super low loss cable 10mm..... **£139.99**

FORMULA-ZERO 50m super low loss cable 10mm..... **£74.99**



Masts – Push Up

Lightweight medium and heavy duty swaged masts sets from 1.25-2" diameter 5ft sections to create a lovely 20ft mast – choose the correct size needed for the antenna installation. Masts have a lovely push fit for easy of use and to give a strong connection

MSP-125 20ft Medium Duty (set of 4 poles) 32mm dia 1.6mm gauge..... **£44.99**

MSP-150 20ft Medium Duty (set of 4 poles) 38mm dia 1.6mm gauge..... **£49.99**

MSP-175 20ft Medium Duty (set of 4 poles) 44mm dia 1.6mm gauge..... **£58.99**

MSP-200 20ft Medium Duty (set of 4 poles) 51mm dia 1.6mm gauge..... **£69.95**

MSPX-150 20ft Heavy Duty (set of 4 poles) 38mm dia 2.65mm gauge..... **£69.95**

MSPX-200 20ft Heavy Duty (set of 4 poles) 51mm dia 2.65mm gauge..... **£89.95**



GRP Fibreglass Base Antennas

Diamond quality, Moonraker pricing
 These high gain antennas have been pre-tuned for your convenience, easy to use, easy to install, and a choice of connection ... look no further

SQB1100P 270cm 3.00/6.00dBd, RX 25-2000MHz, Length 100cm S0239..... **£49.95 SPECIAL OFFER £39.95**

SQB1200P 270cm, Gain 4.5/7.5dBd, RX 25-2000MHz, Length 155cm, S0239..... **£54.95 SPECIAL OFFER £44.95**


SQB1300P 270cm, Gain 6.8/9.2dBd, RX 25-2000MHz, Length 250cm, S0239..... **£74.95 SPECIAL OFFER £69.95**

SQB11000P 6/270cm, Gain 3.0/6.2/8.4dBd, RX 25-2000MHz, Length 250cm, S0239..... **£84.95**

SQB1223H 270/23cm, Gain 4.5/7.5/12.5dBd, RX 25-2000MHz, Length 155cm, N-Type..... **£78.95**

SQB13000H Triband 270/23cm, Gain 4.5/8.3/10.7dBd Length 1.55m..... **£79.99**

SQB13500H Triband 270/23cm, Gain 6.8/9.2/11.8dBd Length 2.70m..... **£119.99**



HF Wire Antennas

Our HF wire antennas are made with complete waterproof potted baluns and high quality "original" flexweave antenna wire.

MDHF-80 3.5MHz balun matched mono dipole, length 40m..... **£59.95**

MDHF-40 7.0MHz balun matched mono dipole, length 20m..... **£44.95**

MDHF-20 14MHz balun matched mono dipole, length 10m..... **£39.95**

OSHF-80 3.5-30MHz balun matched off set dipole, length 40m..... **£59.95**

OSHF-40 7.0-30MHz balun matched off set dipole, length 22m..... **£44.95**

OSHF-20 14-30MHz balun matched off set dipole, length 11m..... **£39.95**

LWHF-160 1.8-50MHz unun match end fed antenna, length 42m..... **£49.95**

LWHF-80 3.5-50MHz unun match end fed antenna, length 20m..... **£44.95**

LWHF-40 7.0-50MHz unun match end fed antenna, length 10m..... **£39.95**



Yagi Antennas

All Yagis have high quality gamma match fittings with stainless steel fixings!

Y627-35 Dual band 3/5 element 3.5/12.5 dBd gain with one feed!..... **£79.95**



Masts

GRP Fibreglass
 Ideal heavy duty fibreglass masts for those antennas that need to be insulated from metal hardware or pole – convenient 2m lengths in a light grey

GRP-150 2m 37mm OD..... **£29.95**

GRP-200 2m 51.7mm OD..... **£39.99**



Masts

Telescopic
 We offer both aluminium and GRP fibreglass push up masts ranging from 20-50ft to suit your needs. The aluminium versions are for portable/occasional use and the fibreglass versions can also be used for fixed installation

LMA-M 28ft open 5.5ft closed 50-25mm aluminium mast..... **£109.99**

LMA-L 33ft open 7.2ft closed 50-25mm aluminium mast..... **£119.99**

TMF-1 20ft open 5.2ft closed 50-30mm high quality GRP mast..... **£199.99**

TMF-1.5 30ft open 7.5ft closed 57-30mm high quality GRP mast..... **£299.99**

TMF-2 40ft open 9ft closed 57-30mm high quality GRP mast..... **£349.99**

TMF-3 50ft open 8ft closed 65-23mm high quality GRP mast..... **£399.99**



Sharman X-510

270cm 5.2m Super Gainer

at a Super Price

Just £99.95



QRP Antennas

The Moonraker Whizz range are great for getting on HF in a neat compact and totally portable way

Whizz Whip HF/VHF/UHF portable antenna with telescopic whip – ideal for any situation where a long wire or vertical antenna is just not an option – get on air today for **just £69.95**

Whizz Loop 20-60m compact loop is ideal for QRP Transceivers when space is limited or using portable with a Yaesu FT-817ND or similar. Can be used indoors with surprising results and handy for travelling due to its "pocket" size antenna ideal for indoor or out and can be packed away and all for **just £69.95**

Whizz Loop V2 (right) same as above but with a frequency range from 40-10m..... **£78.95**




Base Antennas

Simple plug and play HF antennas radial free and at a great price

GP2500 All Band 80-6M Vertical TX 80-6M RX 2-90MHz, Power 250W Length 7.13m..... **£199.95**

GPA-80 budget version of GP2500 80-6M Length 6.0M..... **£99.95**

GPA-80F fibreglass version of GPA-80..... **£129.95**



HF Mobiles

Get great results with the Moonraker range of HF mobiles! From as little as £22.95!

AMPRO-10 Slim line design 28MHz 2m approx. 3/8th fitting..... **£22.95**

AMPRO-11 Slim line design 27MHz 2m approx. 3/8th fitting..... **£22.95**

AMPRO-12 Slim line design 24MHz 2m approx. 3/8th fitting..... **£22.95**

AMPRO-15 Slim line design 21MHz 2m approx. 3/8th fitting..... **£22.95**

AMPRO-17 Slim line design 18MHz 2m approx. 3/8th fitting..... **£22.95**

AMPRO-20 Slim line design 14MHz 2m approx. 3/8th fitting..... **£22.95**

AMPRO-30 Slim line design 10MHz 2m approx. 3/8th fitting..... **£22.95**

AMPRO-40 Slim line design 7MHz 2m approx. 3/8th fitting..... **£22.95**

AMPRO-60 Slim line design 5MHz 2m approx. 3/8th fitting..... **£24.95**

AMPRO-80 Slim line design 3.5MHz 2m approx. 3/8th fitting..... **£27.95**

AMPRO-160 Slim line design 1.8MHz 2m approx. 3/8th fitting..... **£59.95**

Other frequencies available. Call or see online for more details.



Make Your Own? Wire, Insulators & bits

Have fun but making your own antenna system and see how it works against the commercial designs

SCW-50 Enamelled copper wire, 1.6mm, 50m length..... **£24.95**

HCW-50 Hard drawn copper wire, 1.6mm, 50m length..... **£29.95**

FWPVC-90 high quality flexweave with PVC coating 4mm, 50m..... **£44.95**

300-20 Ribbon feeder 300 ohm high quality slotted, 20m..... **£17.95**


450-20 Ribbon feeder 450 ohm high quality slotted, 20m..... **£19.95**

DPC-W Wire dipole centre with securing clamps..... **£5.95**

DPC-S Wire dipole centre with S0239 socket for PL259..... **£6.95**

DPC-38 Dipole centre for 2 x 3/8th whips antennas to make dipole..... **£6.95**

DOGBONE-S small plastic insulator..... **£1.00**



Hardware

We offer all type of mounting hardware to help get you rigged up at home – if you can't see it listed chances are we have it. Check www.moonraker.eu or just give us a call

TRPOD-HDA heavy duty collapsible tripod to suit base mats up to 87mm..... **£149.95**

TK-24 wall bracket offers 18" clearance..... **£29.95**

TK-12 wall bracket offers 12" clearance..... **£18.95**

B82 mast base plate to suit up to 2" masts/pole..... **£22.99**

JOHN-200 clamp 2" poles back to back..... **£17.95**

PTP-20 2" to 2" mast clamp..... **£3.95**



Join the best loyalty programme and start earning **WATTS** now!

All registered retail customers can now earn and redeem free product credits known as **WATTS**. It's simple the more you spend the more **WATTS** you receive. You will also receive bonus **WATTS** when you refer a 'New Customer', 'Write a Product Review', 'Share' a product' or 'Refer a Friend'

Don't miss out – Register now and start enjoying free **WATTS**



Paul Beaumont G7VAK
practicalwireless@warnersgroup.co.uk

The COVID19 lockdown left many of us with lots of time on our hands. Many turned to watching TV all day but amateur radio, CB and the 446 users saw their chance for experimentation as well as listening or transmitting.

Many older amateurs and radio enthusiasts were taken by the appearance of the 'cheaper' handhelds and mobile units that became available from China. Far from being flimsy and poorly made the units seem a good standard and useable without burning a massive hole in your pocket.

One such radio appealed to me. It was advertised as the Baofeng BF-T1 Mini Walkie Talkie covering 400 to 470MHz with 1W output of narrowband FM, Fig. 1.

The price demanded varied between £13.00 to £16.00 for a single unit. Purchasing two at £22 gives an even more favourable price while an order for six means a cost of around £10.50 per unit, and it gets even better as the quantities rise, Fig. 2.

I ordered a single unit costing £12.99, which arrived post-free in a very fast time. Unpacking and eventually switching on, the thing beeped and addressed me in English for every button push. Thankfully, via the menu key, that prompt and the accompanying beep can be turned off.

Out of the Box

In the box is the transceiver itself, battery, headphone and microphone assembly with four-section 3.5mm plug, an orange lanyard you'll never wish to be seen wearing, a small bag with four screws, a belt clip and a USB plug to USB C plug for charging only.

The radio, as I was to discover, cannot be programmed by button selections. The Program 9100 and a programming lead are easily available. The 9100 program can be downloaded and is also available on a miniature CD.

I purchased my 9100 copy online with the 446 Fill already set. Then I overwrote it, using the channels as I saw fit. It is worth bearing in mind that the limit on 446 channels is 500mW and the antenna is likewise modelled to allow very local communications only.

The antenna used on the BF-T1 is very small. Sight of it would remind those who have worked in the non-licensed radio field of the antennas supplied with each transmitter or receiver of the licence free units.

Dual Band Handie on the Cheap

Paul Beaumont G7VAK plays with a very cheap but perfectly serviceable handie-talkie from Baofeng.



On programming my unmodified unit I noticed something not stated in the advert. The frequency range stated along the bottom of the panel states frequency ranges of 136 to 174MHz and 400 to 470MHz, Fig. 3.

As a result I modified my programming Fill to that seen on my listing, Fig. 4. It's notable that the WFM Radio can be programmed to cover 65 to 76 or 76 to 108MHz.

Once programmed I checked the local Caterham repeater GB3NS (channel 10 on the listing as in Fig. 4) as described, 439.6750/430.6750MHz with CTCSS 82.5Hz. The little set was unmodified other than the change of programming. On releasing the transmit pressel I was rewarded with the sound of the repeater carrier, which then closed.

The rough distance as the crow flies between my QTH at Crystal Palace and Caterham is 9.3miles/15km. For 1W and a very poor antenna the result was excellent, Fig. 5a.

A local VHF repeater is GB3XP situated

in Morden, which is around 4.2miles/6.8km distant, Fig. 5b. Looking at Fig. 4 and Channel 20 the frequencies can be seen as 145.6875/145.0875MHz with CTCSS of 82.5Hz. Attempts to open this repeater failed miserably but with a tiny antenna not configured for the 2m band (and in my opinion pushing it a bit even with 70cm frequencies) this was not a surprise.

Thinking about a Modification

Looking again at Fig. 1, it can be seen the BF-T1 sports a light. A single hi-output white LED with a cheaply silvered reflector would not be much use for finding one's way around in the dark. I was considering an antenna modification here, reasoning that the removal of the LED would give sufficient room for a socket of sorts.

While I prefer a BNC socket it was obvious there would be no room to fit one easily, if at all, given the size constraints and the necessity of a very firm base.

Looking through my junk box I discovered a single SMA Female Socket

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

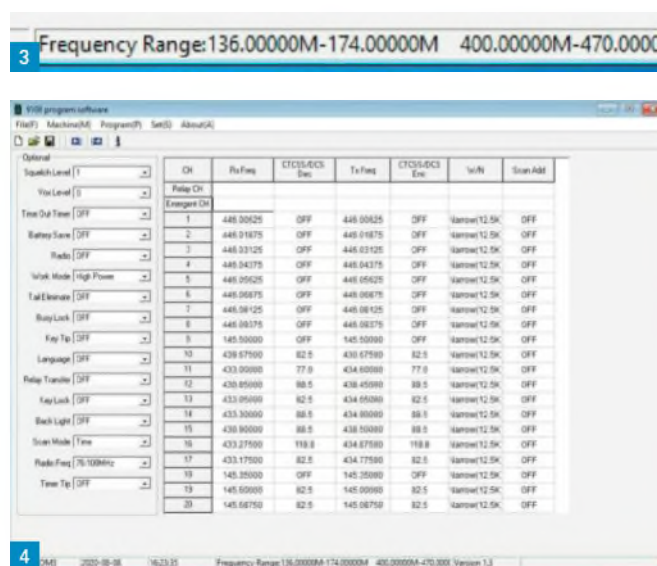
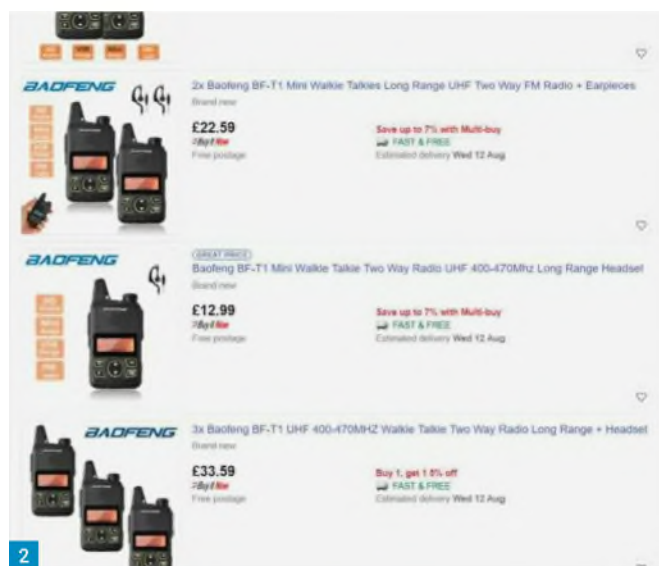


Fig. 1: The BF-T1. Fig. 2: An ad for the BF-T1. Fig. 3: The frequency range, as displayed in the programming software. Fig. 4: The author's 'frequency fill'. Fig. 5a: The author's QTH to Caterham. Fig. 5b: The author's QTH to Morden. Fig. 6: Opened up and with adapters. Fig. 7: With the back removed.

with a pigtail attached and another one that had an SMA Male Plug to BNC Female Socket RF Adaptor, Fig. 6.

Opening the unit is not difficult. The battery is removed allowing the display of the misleading maker's label, Fig. 7.

Note the small crosshead screws in line with the battery connector. Two others are situated at the bottom of the unit. All four screws can be removed.

Taking the back off can be fiddly. Obviously no damage should occur during this process and I suggest a screwdriver shaft is inserted into one of the holes vacated by one of the top screws and the lid gently lifted from its mount, which brings the motherboard free from the case. Take care not to rip the audio leads from either the board or the miniature loudspeaker.

Once inside I removed the main board easily. Placing in a small vice I unsoldered the small helical antenna from its pad, Figs. 8a and 8b.

Then I set about fixing the SMA female socket. I had no use for the LED Torch and decided that was the best place to fix the SMA receptacle. The LED unsoldered easily enough and I cleaned the small pads to reduce whatever profile they exhibited in the small space available.

Any intention of using the screened low-profile coaxial lead as fitted to the new receptacle was soon squashed. Its



diameter was too thick, causing me to remove the outer sheath and the braid, leaving only the central core.

I removed the transparent lens and set it aside. Following this was the silvered reflector. Using my soldering iron, I simply melted a hole into the lens and slowly increased its size with careful use of a small diameter reamer tool. Slipping the SMA receptacle through this access I tightened the lock nut to my satisfaction. Then after mixing a quantity of 'Ten Minute' Araldite Resin I packed the space behind the lens and the reflector and then carefully placing the connecting wire, the coaxial core, through the moulding for the lamp assembly, I placed a splodge of resin to hold the lot in place. In keeping with good practice, I used a wipe soaked in methylated spirit to remove any excess. Ten minutes is a good drying time but I left it overnight to be sure, Fig. 9.

In the morning the bond was very strong. The antenna connecting wire was placed along the top of the board, in the unit moulding, and soldered into place.

The battery and rear cover were replaced and after a quick visual check the modified unit, Fig. 10, was switched on. It worked





Fig. 8a: The antenna pad. Fig. 8b: Ready for surgery. Fig. 9: Fitted to lens with reflector prior to filling with resin. Fig. 10: The completed unit with SMA/BNC adaptor.

first time. With a claimed RF output of 500 or 1000mW I didn't bother tuning it up.

In Use

Fitting a short 2m/70cm antenna I was rewarded with activity on the 446 licence-free channels but also opened and received the Caterham Repeater with no problems.

The Morden repeater, GB3XP, on 2m was another matter. I fitted a longer 2m whip claiming 'Nagoya 771' but had difficulty

on transmit. Using an SMA/BNC adaptor I connected my stack-mounted 2m/70cm colinear. A QSO was in progress and I recognised both parties as being members of the Surrey Radio Contact Club, of which I am a member. I put out a call and was rewarded with RS2/2. Not good but with coaxial losses I was probably putting out around 300mW. No complaints.

The commercial radio side of things worked well for me as I had the misfortune to tune up on LBC with **Steve O'Brien** waxing lyrical. I turned back to the repeater.

With 65 to 76MHz also available it occurred to me there may well be other stuff worth catching, either with skip or some other transmissions closer to home.

In Summary

So, are these little units worth their cost? Simply, yes.

The audio is a bit duff and needs taming. Being from a standard IC, sorting this will be the matter of raising the data sheet and the placement of a resistor, or two.

Of course, a simple whip antenna could just be added using a central core of coax and an access hole bored through the antenna moulding to allow this to connect to the existing pad after removal of the existing small helical antenna.

It's horses for courses here and much dependent on what you wish to achieve. For less than fifteen quid, though, you can't go wrong!

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

The Battle of Britain

IN COLOUR



A 164-page collector's edition commemorating the 80th Anniversary of the Battle of Britain. Just £8.99 with free postage within the UK.

Call 01778 392489 or visit www.militaria.ma/battleofbritain

Bowood Electronics

SUPPLIERS OF ELECTRONIC COMPONENTS

Visit our **NEW** website and order on-line at www.bowood-electronics.co.uk

E-mail sales@bowood-electronics.co.uk

Contact Will Outram

Unit 10, Boythorpe Business Park, Dock Walk
Boythorpe, Chesterfield S40 2QR
Telephone: 01246 200222

SDR-Kits

New! The 2-Port VNWA3SE

Fully Automatic 2-Port Measurements, a world first in this VNA price-class. Now with SMA or N-conconnector options

- Covers 1 kHz – 1300 MHz
- Full, S11, S12, S21, S22,
- Best in Class performance
- Thousands in use Worldwide
- Free Software & Helpfile

VNWA 3SE 2 Port SMA incl 3pc Cal Kit **£599.00**
VNWA 3SE 2 Port N Connector Model **£622.80**
3SE Upgrade Kits for VNWA 3E from **£142.80**

Lower Prices on our VNWA 3 and 3EC Models
Now from: **£406.40.**

Just introduced! N Connector Calibration Kits
4pc and 5pc from **£58.80**

New! Magi-Cal® Automatic SMA Calibrator for VNWA

£126.00

SDR Kits – Authorised SDRplay Distributor since 2015

- SDRplay RSP1A 1 kHz-2000 MHz SDR-Rx 1 Antenna Bias Tee **£93.95**
- SDRplay RSPdx SDR-Rx 3 Antenna inputs + HDR **£187.50**
- SDRplay RSPduo SDR Rx Dual SDR Tuners – Diversity **£225.00**

Low Jitter GPSDO 1 ppb 400 Hz–810 MHz 1 Port £103.20 2 Port £153.00
FA-VA5 600 MHz Antenna Analyzer Kit 99% Kit £179.95 Full Kit £159.95

Experiment with L-Band Antennas!

- Permanent Outdoor L-Band Antenna with 10m cable for 1540 MHz **£52.50**
- L-Band Receive Antenna A154/A162 **£12.90**

R3500D ARDF Rx Kit £30.60
QRP 2000 Synth Kit from £25
Mitsubishi RD16HMF1 £4.80
HupRF PAT Boards and DG8 144 MHz PreAmp Short-kit – In stock!

www.SDR-Kits.net Webshop Orders only – Paypal or Pro-Forma Invoice
e-mail: info@sdrr-kits.net Prices shown incl VAT – p&p extra
SDR-Kits Office 11, Hampton Park West, Melksham, SN12 6LH UK VAT reg GB979776427
VNWA 3EC/3 – HupRF Pat Kits – Silicon Labs Si570 – RF Transistors – DG8 Preamp Kit

SB SOTABEAMS™

AMATEUR RADIO FOR THE GREAT OUTDOORS

Crimp Tool for Powerpole Connectors



£27.95

Powerpole connectors in various pack sizes:

5 x 15A or 30A	£4.99
5 x 45A	£6.50
12 x 30A	£9.99



(1 connector = 1 black shell + 1 red shell + 2 contacts)

www.sotabeams.co.uk

All items shipped from our UK factory. Prices exclude p&p.

2 metre filter



2m bandpass filter £44.95

Put a stop to interference
Make more contacts!

Finding inspiration online!

Tim Kirby GW4VXE
longworthtim@gmail.com

The online RSGB Convention proved a great success as far as I could see. Although for many people there is a great attraction in meeting up, swapping stories and so on, not everyone is able to (or willing to) travel to a convention venue for the whole weekend. How wonderful it was, then, to be able to listen to some really excellent talks from wherever you were on the day. I can't recommend **Jim Bacon G3YLA's** talk about *VHF Propagation and the Weather* enough. I learned lots about Tropo and Sporadic E, in particular. Jim also mentioned a website that he is collaborating in, which has plenty of information aimed particularly at understanding Sporadic E as well as the change in day-to-day 'local' conditions on 80m. You can find the site, Propquest, at: www.propquest.co.uk

All the talks from the convention will be available online by the time you read this, so take a look on the RSGB's YouTube channel and find them. I'm also looking forward to **Palle Preben-Hansen OZ1RH's** talk on *Ionosscatter on 50 and 144MHz*, which I wasn't able to watch live. Whatever your interest and experience, hopefully there is something to inspire and engage you.

Assuming that 2021 allows a more usual convention format, it would be great if there was also some online format like this year, so that people have the choice whether to attend in person or online. I am sure that many would be happy to pay to attend 'virtually' should loss of attendance revenue be a concern.

I was delighted to have the opportunity to present one of the RSGB's *Tonight at 8* webinars on *My The World of VHF* a few weeks ago where I introduced the VHF bands and tried to give a feeling for what you might be able to expect on each of the bands. It was a bit of a whistlestop tour, but if you haven't seen it yet, do have a look at the YouTube clip below and I hope you'll enjoy it.

<https://youtu.be/KfDKQ39z05k>

The new series of Foundation Practical videos are well worth a look too if you're getting started in the hobby, or even if you just fancy a refresher. Again, have a look at the RSGB's YouTube channel (below) to find them.

Tim Kirby GW4VXE has been enjoying online links, including participating in the recent RSGB Convention.



www.youtube.com/user/TheRSGB/videos

It's really great to see technology used in this way, making it possible for talks and information to reach many more than previously.

Another look at 4m FM

I recently had the opportunity to review a dual-band 70/144MHz handheld, which perhaps you'll read about elsewhere. What I wanted to write about though, was my experience on 70MHz FM using a handheld.

My first 70MHz handheld experience, a few years back, was a bit of a disappointment and I think I had about one contact in a year with the unit and decided to sell it. There was nothing wrong with the handheld itself, though. The limiting factor was the antenna that was supplied with the handheld, which was probably fairly much akin to a dummy load on the band. So, when I got hold of the unit more recently, I was keen to try a few different options.

The supplied dual-band 70/144MHz antenna certainly worked across a distance of a few miles, particularly from an elevated spot. From one of the hills near Fishguard, I worked **Richard GW1JFV** in Haverfordwest, some 30km away, as well as hearing **Peter GW4JQP**, also using a handheld, a bit further off, at a distance of around 45km. I wanted to try and see if I could improve on that and had previously used one of the Spectrum Flexiwhips. This seemed to offer a bit more gain than the standard antenna and provided some weak signals where the stock antenna had

produced nothing at all. Finally, I used a quarter-wave magmount, either on a metal roof at home or on the car. That worked very well indeed, better, as you might imagine, than either of the handheld whip antennas.

I was curious to see what would happen with the 70MHz handheld in a more urban environment and brought it to Cheltenham where I knew there was some activity on the band. I was pleased to find that the handheld, running about 5W, was audible across town, on an obstructed path. It did seem to work much better outside than in the house, despite being at ground level rather than on the second storey of the house.

So, if like me, you're tempted by a handheld on 70MHz, have a play with antennas and see what works best depending on how plan to use it. If you are planning portable activity from the hills, then you might even like to try one of the Flowerpot designs, which seem to have worked well for some people. If you aren't familiar with the Flowerpot antenna (I wasn't), you can see a design for a 2m version here:

<https://tinyurl.com/y3mtt32g>

This could be scaled up for 4m, which is shown on MONFI's website:

<https://tinyurl.com/y4dalquw>

It will be exciting to see if the better availability of 4m handhelds increases FM activity on the band. Don't necessarily expect to make too many contacts on the handheld's supplied antenna and be

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk



Fig. 1: David M0TFY uses this Trio TS-700 on a regular basis. Fig. 2: Paul Beaumont G7VAK has this lovely Kenwood TR-7625. Fig. 3: Robert PA9RZ has a wonderful collection of Icom portable radios which are all used regularly.

prepared to try something different.

I was pleased to find in both West Wales and Gloucestershire, that there were plenty of stations equipped with 70MHz FM, perhaps waiting for a little bit of activity.

The 6m Band

Jef Van Raepenbusch ON8NT (Aalter) caught a 6m opening on September 3rd, working GM8IEM (IO78), EA6SA (JM19), EA7M (IM76), EA4BAS (IN80), EA5AL (IN80), LX1JX (JO30), G4IMP (JO01), EA4YR (IM78) and LB3AG (JP53).

The 2m Band

Jef ON8NT runs 25W from an IC-9700 and a 5-element LPDA and had an exceptional month. Most of Jef's contacts were on FT8, but he did work DL5NEN (JN59) on CW on September 6th. Highlights from Jef's log include OK1VVT (JO60), OZ1CCM (JO55), GM4FVM (IO85), E13KD (IO51), EC1A (IN73), F6CIS (IN94), G16ATZ (IO74), G7RAU (IN79), SM7WW (JO65), SP1FJZ (JO64), SP1MVG (JO74), GD3YEO (IO74) and GM3SEK (IO74), all on FT8.

Jon Stow G4MCU (Hockley) enjoyed the tropo in September between the 17th and 21st, with the highlights being OZ1BEF (JO46), DK4EE (JO41), DL2RZ (JO54), GM4YXI (IO87), GM00QV (IO85), DG8LG (JO44), DL0CX (JO43), DL5BBF (JO42), SM4GGC (JO69), OZ1BNN (JO55), OZ6OL (JO65), SM7GVF (JO77), OZ8ZY (JO54), GM4JOJ (IO97) and SM6VTZ (JO58). Jon runs 100W from an IC-9700 and prefers SSB to digital modes.

Roger Daniel G4RUW (Newbury) also enjoyed the September tropo. On September 17th he worked SK6QA (JO58) and then on September 20th SM4GGC (JO69). Both QSOs were on FT8. Next day on the 21st Roger worked SM7GVE (JO77) on SSB then went back to FT8 and worked LB7ZH (JO59). Roger says that he also worked OZ, PA, DL, ON, GM and F during the opening.

Phil Oakley G0BVD (Great Torrington) was pleased to work OZ1JMN (JO46) during the tropo opening on September 18th.

Tim Hague M0AFJ (Helston) has a difficult take off towards Germany and Denmark but did well in the tropo opening, working DB8WK (JO33), OZ1BEF (JO46), DJ8MS (JO54), OZ1CCM (JO55), DL2AKT (JO50), DF9QT (JO30), OK1DOY (JO60), DK2EA (JO50) and DF6PW (JO40). Tim's decided to replace his IC-9700, which he didn't enjoy, with a tri-band transverter system from Q5 Signal, which he is looking forward to trying.

Here at **GW4VXE** (Goodwick) there seemed to be plenty of tropo around through the month, highlights being EC1A (IN73), F6HRO (IN88), F5APQ (JO00), F6BTP (JN09), DG1KDD (JO31), EA2XR (IN83), EA1MX (IN73), OZ1CCM (JO55), DB8WK (JO33), DJ9YE (JO43), PA3BIY (JO22), OK1VVT (JO60), DL3TW (JO44), SM7DTT (JO65), DF5VAE (JO64), OZ2LIN (JO46), DJ8MS (JO54), OV3T (JO46), OZ2ND (JO46), OZ1CCY (JO45), OZ4VV (JO46), OZ5TG (JO45), F6APE (IN97), GM0HBK (IO77), G100TC (IO65), E19KF (IO64) and E18HH (IO53). Many of these contacts were ones I had not expected to be able to make from the west coast of Wales over a mountainous path. Fascinating!

The 70cm Band

The highlights of Jon G4MCU's log during the September opening were SM6VTZ (JO58), OZ9FW (JO65), DJ8MS (JO54), DL4EEC (JO33), MM0CEZ (IO75), OZ1BNN (JO55) and SP1MVG (JO74) who was a new country for Jon on the band at a distance of 987km. Jon runs 50W of SSB from an FT-991.

Jef ON8NT worked G1YBB/P (IO82) during the UK Activity Contest on September 8th. Highlights on FT8 were GB8BOB (IO82), G0RQL (IO70), G4RRA (IO80), GD3YEO (IO74), GW3TKH (IO81) and OZ1LWT (JO46).

Tony Collett G4NBS (Cambridge) said that when he went on the band on September 20th, during the opening he was pleasantly surprised at the amount of activity – it was almost like being back in the 1980s, except this time on FT8, with many of the same stations being active! Tony worked a couple of stations on CW and SSB (OZ1BNN was using a 144MHz antenna at the time!). On the 21st, Tony was about to switch off, but got caught up with other things and then noticed SM0MDG and OH1ND, who was Tony's best DX of the opening.

Simon Evans G6AHX (Twynning) took part in the RSGB UHF contest at the start of October. On 70cm, he had ten contacts with the best DX being OR6T (JO20) at 501km.

Tim M0AFJ worked DK2EA (JO50) on September 17th.

The 23cm Band

Jon G4MCU runs 10W of SSB from an IC-9700 and lists OZ1FF (JO45) and DB8WK (JO33) from the September opening.

Robert Van Der Zaal PA9RZ (Sassenheim) says he had to miss the

opening during the September 23cm activity contest as he'd had to chair a meeting of his local radio group. He very kindly sent a picture of his 'vintage' Icom corner, covering 6m up to 70cm, and says that when there is a lift, he prefers to use these radios.

Simon G6AHX had eight contacts during the RSGB UHF contest with the best DX being G3R (IO93) but Simon was also very pleased to work PW columnist **Bernard G4BXD** on the band. Simon says that he can regularly receive several beacons on 23cm: GB3MCB, GB3USK, GB3IOW, GB3FM, GB3DUN and GB3MHW.

Satellites

Tom Morgan ZS1AFS says that he made a contact with a ZS2 station through the ISS crossband repeater using his special call of ZT1T/P. He's also managed to access the repeater using a handheld and extended rubber duck.

Jef ON8NT enjoyed the SSTV transmissions from the International Space Station (ISS) on September 30th and October 1st. Transmissions were made on 145.800MHz using the PD120 mode.

Kevin Hewitt ZB2GI (Gibraltar) made a couple of contacts: EA7P (IM76) and IS00ZK (JM49) via the ISS Crossband repeater using his FT-817. Kevin took part in the ISS SSTV event on September 30th and October 1st, receiving seven full images with three duplicates over four passes. Kevin used an FT-817, a Win 7 Notebook PC running MMSTV and a manually-tracked 2m/70cm log periodic.

Simon G6AHX has made some nice QSOs through the RS-44 satellite, including PD4HDB, F6CTW, OH5LK and ON3ONX, but his main aim was to make a transatlantic contact, which Simon was delighted to achieve on September 23rd when he worked WO3T in Virginia. On October 7th, Simon listened to the ISS Telebridge activity on 437.525MHz FM when a schools contact was being made.

Patrick Stoddard WD9EWK (Phoenix) reports, "AO-92's battery issues have kept it offline, while AMSAT decides what to do next. In the past month, we gained the use of the new Kenwood TM-D710G operating from the ISS Columbus laboratory module. This new radio, with the customized firmware for the ISS provided by JVC/Kenwood, has been busy - first as a cross-band voice repeater, and now as a packet/APRS digipeater.

"In addition to being used for school contacts, the new TM-D710G had been



operating as a cross-band voice repeater. With an uplink at 145.990MHz with 67.0Hz tone, and the downlink around 437.800MHz ($\pm$ for Doppler), it drew many stations that have not tried other satellites. In the cross-band voice repeater mode, the ISS radio transmits at 5 watts - more power than any other FM satellite we have, but not high enough to overheat the radio. The 5W downlink was easy to hear. On passes that were not so busy, mostly late at night, I could work the repeater with HTs transmitting at 2 to 5 watts. For other passes, I used my Icom IC-2730 2m/70cm FM mobile radio, switching among its three power levels (5/15/50W) to see how much power I needed to get through the repeater. Sometimes, even 50W was not enough, but most of the time I only had to go up to 15W to make contacts during busy daytime passes.

"In the past couple of days, after a school contact that used 437.525MHz as the ISS downlink over Europe, the new TM-D710G was put into packet/APRS digipeater mode. On the new radio, the digipeater transmits at 10 watts, as it is not transmitting as much as in the voice repeater mode. It hears well, and the 10W downlink helps in copying more packets transmitted from the ISS. In the short time I have been using the digipeater, I have had a few contacts with stations across the continental USA and northern Mexico, using my Kenwood TH-D74 and Elk log periodic antenna. ARIS has not announced how long the radio will stay

in digipeater mode.

"Another new TM-D710G is due to be sent to the ISS by the Russians, to replace their older TM-D710 used for school contacts and SSTV. Once that radio is installed and put into operation, it might be possible to see both the voice repeater and packet/APRS digipeater in simultaneous operation. The voice repeater was in operation during the recent SSTV operations, along with SSTV and a school contact using 437.525MHz. With new TM-D710Gs operating from both the European and Russian parts of the ISS, this will provide more flexibility for amateur radio operations."

Phil G0BVD has been listening to the ISS crossband repeater, having set up his IC-9700 with **Harold M30PW**. Phil hasn't made any contacts so far, but has heard French and Italian stations

Here at GW4VXE I had some success with the ISS crossband repeater when it was low over the sea to the southwest, out of range of a lot of Europe. Of course, while that limits competition, it also restricts the stations you're able to work! Stations worked include EA1BNF (IN52), 2E0XXI (IO93), E16FM (IO51), M10KOA (IO74), EA1PA IN71) and EI3FW (IO54). I'm now looking forward to trying out the APRS digipeater.

Well that's it for this month. Please keep your news - and your pictures of vintage radios still in use - coming. See you next time.

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

High Visibility and Operation with a High-Resolution Full Colour TFT & Touch Screen Display Superior Performance in a Compact C4FM Digital Transceiver

System Fusion II Compatible

Compact & Reliable 5W RF Power Output

700mW of C4FM Exceptional Quality Audio

Dual band Simultaneous Receive

**High Visibility Full-Colour
TFT touch panel Display**

Built-in High Precision GPS Receiver

**Easy Hands-Free Operation
with Built-in Bluetooth® unit**

**High-Resolution and High-Speed
79 channel Band scope**

**CAM (Club channel Activity Monitor)
Function**

**FM Friendly Digital by AMS
(Automatic Mode Select)**

WIRES-X Portable Digital Node Function



《 Actual Size 》




C4FM/FM 144/430MHz DUAL BAND
DIGITAL TRANSCEIVER

FT3DE

 **Bluetooth®** 

C4FM
Data-Centric Voice
Clear and Crisp Voice Technology

AMS
Automatic Mode Select



2020 PW 144MHz QRP Fun Contest Results

Colin Redwood G6MXL
practicalwireless@warnersgroup.co.uk

Colin Redwood G6MXL has the results of the June 2020 2m QRP Fun Contest.

2020 saw 42 entrants submit logs in the 36th Practical Wireless 144MHz QRP Fun contest held on Sunday June 14th 2020. This year due to the coronavirus pandemic all stations entered as single operators from fixed locations, depriving many entrants of the use of their favourite portable locations. Despite this, many stations did surprisingly well with low power. Several regulars submitted check-logs.

Government restrictions associated with the world-wide pandemic that is Covid-19 resulted in a very strange contest this year. The combination of being confined to fixed operation, often from a poor location, propagation and weather made for a rather tough and frustrating contest for many entrants. Not only was the number of entries down this year (only one from Wales and the rest from England and Scotland), the number of contacts and squares worked were down as was to be expected.

The entrants made a total of 525 valid contacts with stations in 19 different squares, Fig. 1.

2020 Winners

The overall winner, leading English station is the **Ossett Amateur Radio Operators M00RO**, operated by **J. Brown** from Ossett (IO93EQ). He used an Icom IC-911 transceiver and an 11-element Yagi antenna.


In second place is **Geoff Newstead (Burton On Trent ARS) G8EKG**, operating from Stapenhill (IO92ES). He used a Flex 5000 transceiver and a Cushcraft Antenna.

The leading Scottish station is **Martin Mrawczyk 2M0KAU**, operating from Dundee (IO86ML).

The leading Welsh station is **Tom Brady GW8HEB**, operating from Welshpool (IO82KP).

Full details of the results can be found in the tables in this article. As usual certificates will be sent to all the leading stations above and the leading station in each square.

Checklogs were received from **Andrew Lancaster G0JCC**, **Steven Clements G1YBB**, **Roger Piper G3MEH** and **Robin Thompson G3TKF**.

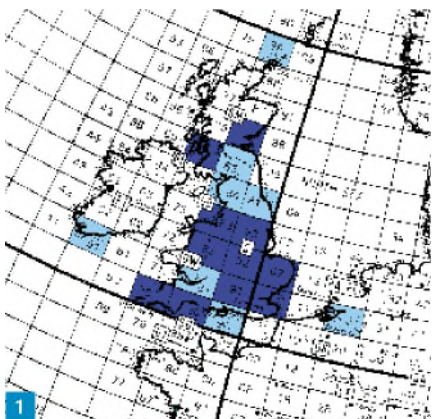

Home QTH

Being limited to fixed station operating presented a challenge to some, but not all. Those who already had a 144MHz station setup at home enjoyed the convenience of operating from home. One station commented, "After a leisurely breakfast and quick look at the Sunday papers I was ready to hit the radio on switch and start making contacts in the contest". Others had to set up a 2m station at home especially for the contest.

Several stations concluded that their home locations are poor for VHF contesting. **Dave Tarbatt G7KSR** said that, "After four hours shouting CQ using a 5-element ZL-Special at 25ft on a temporary push-up mast in the back garden, I think it's safe to conclude that my home QTH is poor for VHF contesting. Four QSOs really does not a contest make!" **David Smith GM0KCN** lives in a valley at river level with hills all around. He wasn't expecting to make many contacts but, "I did think that one single contact was a lot worse than I anticipated".

Even with a good QTH, some had QRM to deal with. **Martyn Wright G4RLF** has recently been suffering with a local faulty solar panel inverter, so despite having a good QTH, contacts are difficult, with about a 20dB noise floor.

No Midges

There were some benefits from staying at home. **Ron G0BNC**, says, "I missed going



out portable on the hills and getting a suntan, but did not miss the midges using my blood as their dinner. I used to enjoy the contest in the early 80s when I would often stop for a chat as it is the taking part with me, not the winning. I had a few stops to chat for a few minutes, which was good because some were good contesters normally with 59 reports and gone. The contacts were very slow coming, and I am glad I was using my voice caller, or I would not have a voice left. Only one contact in my 1325 afternoon session, and G4UXC said I was the only station he had heard".

Equipment

Entrants were determined to participate with whatever equipment they had to hand. A wide range of equipment was deployed, ranging from state-of-the-art multi-band SDR transceivers to single-band transceivers of the 1980s and earlier. Several entrants resurrected some older transceivers. **Ross Wilkinson G6GVI** says he got his "old IC-202 back in action, after repairing its dial-knob". **Martyn Wright G4RLF** says that his Liner 2 overheated at times and stopped transmitting, Fig. 2. He has modified it to improve the sprogs and it now boasts a GASFET RF and mixer stage. Others used some old antennas, including two stations using Jaybeam antennas, which must be roughly 30 years old.

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Thunderstorms

A couple of stations felt that in addition to poor conditions in general, thunderstorms were probably responsible for the lack of stations working.

Back in Touch

The contest enabled some entrants to make contacts with friends they hadn't heard on the air for some time. **Ross Wilkinson G6GVI** got in touch with **Terry Hampson G6DEG**.

First Contest

The *PW* 144MHz QRP contest has always welcomed newcomers to contesting, so it was good to see some new calls amongst entrants. **Billy Starkey M7AJT** passed his Foundation exam in September 2019, and this was his first contest. Billy is a member of the Cornish Radio Amateur Club.

KST

Several entrants commented on the use of the ON4KST chat facility during the contest. The contest rules are designed to encourage the greatest possible participation, particularly among newcomers to contesting using simple gear. Therefore, use of the ON4KST chat facility is not permitted. I received suggestions that stations may have logged on to the ON4KST chat facility, without actually entering into a chat, thus enabling them to see information from other stations on the band. The rules for future *PW* 144MHz QRP contests will clearly prohibit this practice.

Date for Your Diary

Several entrants hoped that things would be back to normal in 2021. Government regulations permitting, it is certainly my aim to revert to normal operation. The provisional date for the 2021 *PW* 144MHz QRP Contest is Sunday June 13th 2021. Hopefully, the usual format, including multi-operator portable operation, will be possible along with 5W power limit. As usual the event will be arranged to run alongside the RSGB 144MHz Backpackers contest for the benefit of entrants to both contests. Keep an eye on *Practical Wireless* and the *PW* Contest website at: www.pwcontest.org.uk

Thanks

Many entrants expressed thanks to other stations taking part or giving points away. I would like to thank everyone who participated in 2020, and **Neill Taylor G4HLX** for devising the contest in the first place.


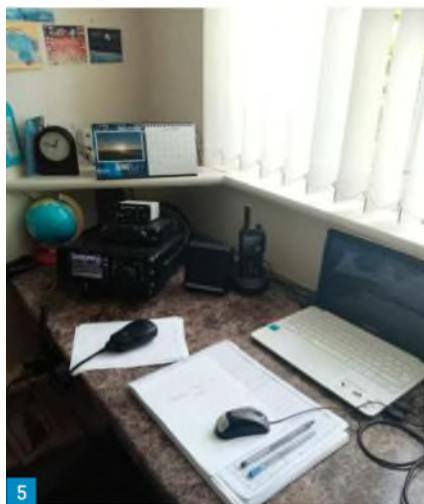


Fig. 1: Map showing locator squares of stations that entered (in dark blue) and other stations worked (light blue). Fig. 2: Martyn Wright G4RLF operating his modified Liner 2 transceiver. Fig. 3: Dave Hewitt G8ZRE working on his antenna system. Fig. 4: Peter Knight G6EPN operating from his garden. Fig. 5: Roger Laphorn G3XBM operating position. Fig. 6: John Wake M0JPA operating position. Fig. 7: The antennas at Cambridge & District Amateur Radio Club's station G2XV. Fig. 8: Huw Hallybone G8IBL operating from his garden.

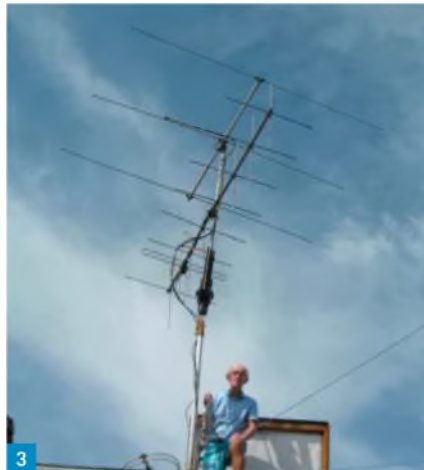

Description	Name/Team	Callsign
Overall Winner	Ossett Amateur Radio Operators	M0ORO
Runner Up	Geoff Newstead (Burton On Trent ARC)	G8EKG
Leading English Station	Ossett Amateur Radio Operators	M0ORO
Leading Welsh Station	Tom Brady	GW8HEB
Leading Scottish Station	Martin Krawczyk	2M0KAU

Table 1: Leading stations.

Square	Name	Call	No. entries
I070	Billy Starkey	M7AJT	1
I075	Roy Kavanagh	GM5LOW	1
I080	Ian Carter	G0GRI	1
I082	Simon Pryce	G0EIV	6
I083	Dave Hewitt	G8ZRE	5
I085	David Smith	GM0KCN	1
I086	Martin Krawczyk	2M0KAU	2
I091	SADGIT	G4RLF	6
I092	Geoff Newstead (Burton On Trent ARC)	G8EKG	4
I093	Ossett Amateur Radio Operators	M0ORO	10
J001	Malcolm Bryan	G8MCA	3
J002	Philip Holt	G4LPP	5

Table 3: Square winners

Pos	Call	Name	QSOs	Squares	Score	Locator	Transceiver	Antenna	Ht. m asl
1	M0ORO	Ossett Amateur Radio Operators	45	9	405	I093EQ	Icom IC-910	11-ele Yagi	110
2	G8EKG	Geoff Newstead (Burton On Trent ARC)	34	8	272	I092ES	Flex 5000 + Khune TVTR.	Cushcraft 13B2	95
3	G4RLF	SADGIT	29	9	261	I091BB	Liner 2 Modified + LNA	17-ele Tonna	77
4	G4PGJ	David Ward (Burton ARC)	23	9	207	I092ET	Icom IC-7100	7-ele LFA	133
5	G8MCA	Malcolm Bryan	34	6	204	J001BK	TS590 + Elecraft TVTR and Aispy SDR on	5-ele LFA	12
6	G0EIV	Simon Pryce	31	6	186	I082OR	Yaesu FT-897D	10-ele Yagi	77
7	M1AEA	Mark Waldron	25	7	175	I082WM	Yaesu FT-817	4-ele Cushcraft Yagi	219
8	G4LPP	Philip Holt	22	7	154	J002SS	Yaesu FT-991a	9-ele xy Tonna Yagi	4
8	G2XV	Cambridge & District Amateur Radio Club	22	7	154	J002AH	Kenwood TS790E	Stacked pair of 9-ele Tonnas	16
10	G8ZRE	Dave Hewitt	19	7	133	I083NE	Yaesu FT-897	8-ele XY Yagi	30
11	G0BNC	Ron Flemming	15	5	75	I091GT	Kenwood TS-711E	10-ele Jaybeam	92
12	G4HZG	Michael White	14	5	70	I093HE	Flex5000a	12-ele yagi	15
13	G8XYJ	Matt Porter	11	6	66	I082PJ	Icom IC-9700	6-ele DK7ZB	117
14	G8ITB	Cray Valley Radio Society	15	4	60	J001AI	Icom IC-7300	Diamond X-5000 vertical colinear.	92
15	G8EYV	Cambridge & District Amateur Radio Club B Station	11	5	55	J002AD	Icom IC-9100	7-ele Yagi	15
16	G0AJJ	Linda Leavold	18	3	54	J002QT	Icom IC-910	17-ele Tonna	43
17	G8EQD	David	13	4	52	I093HK	Yaesu FT-991	8-ele	76
17	M0WID	David Wilde	13	4	52	I091WF	Yaesu FT-817	8-ele LFA	100
19	GX5TO	Sheffield & District Wireless Society	10	4	40	I093HL	Icom IC-7100	Jaybeam 8-ele	73
19	2E0PKS	Richard J Harlow	10	4	40	I092EU	Yaesu FT-897D	3-ele beam HB	48
21	G0GRI	Ian Carter	12	3	36	I080SX	Icom IC-9700	CX725 tri-band colinear	108
22	2M0KAU	Martin Krawczyk	7	4	28	I086ML	tf571 and 3 element beam	3-ele beam	20
23	G6DEG	Terry Hampson	8	3	24	I083UO	Yaesu FT-817nd	7-ele zL Yagi	120
24	G8IBL	Huw Hallybone	7	3	21	I091QE	Yaesu FT-817	5-ele Sota beam	48
25	2E0VCA	Antony Hill	10	2	20	I093DU	Icom IC-7000	Diamond 10-ele 2m Yagi	205
25	G4BZI	Roger Bracey	5	4	20	I083SB	Icom IC-202E	7-ele ZL Special	70
27	G6GVI	Ross Wilkinson	5	3	15	I083SN	Icom IC-202	5-ele Yagi	114
28	M7B00	Hardy Whiteley-Boocock	6	2	12	I093BR	Yaesu FT-991	Diamond X510N	0
29	GM5LOW	Roy Kavanagh	10	1	10	I075QN	Trio TR-9000	Coaxial Dipole (White Stick)	16
29	M6XUT	Dean Baker	5	2	10	I093AR	Yaesu FT-991	Diamond X510	5
31	G6EPN	Peter Knight	4	2	8	I091DK	Trio TR-9130	4-ele Yagi	140
31	M0JPA	John Wake	4	2	8	I093CS	Yaesu FT-847	5-ele Crossed Yagi	220
31	M0RPK	Richard	4	2	8	I093FJ	Yaesu FT-897D	3-ele Yagi	140
31	G8VEN	Harold Chapman	4	2	8	I092KN	Yaesu FT-817	4-ele Yagi	80
35	M7X0Z	Richard Coffey	3	2	6	I093DT	Yaesu FTM-7250D	Diamond X50N	156
36	G7SKR	Dave Tarbatt	4	1	4	I083RI	Icom IC-9100	5-ele ZL Special	65
37	G3XBM	Roger Laphorn	3	1	3	J002DG	Yaesu FT-991A	2m big-wheel omni	20
37	M0JCF	Mark Hales	3	1	3	J001BK	Yaesu FT-817	J pole and 5-ele Yagi	30
39	GM4FYH	Catherine Waddington	2	1	2	I086NF	Yaesu FT-818	Homebrewed 6-ele Yagi	3
39	GW8HEB	Tom Brady	2	1	2	I082KP	Yaesu FT-817ND	2/70cm Vertical	149
39	M7AJT	Billy Starkey	2	1	2	I070IF	Yaesu FT-897	Diamond X50	147
42	GM0KCN	David Smith	1	1	1	I085NN	Yaesu FT-991	Diamond dual band vertical.	118

Table 2: Overall results table, Practical Wireless 144MHz QRP Contest 2020.

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

TOP WINTER CHOICES

With a HUGE range of
Radios & Accessories

...and fast, friendly service you can trust



Icom IC-705

VHF, UHF, HF, D-Star all mode
10W QRP portable transceiver

£1299.99

• LC192 Optional Carrying Case.....£156.00



Icom 9700

270/23cms Transceiver
The Boss's choice!

GENEROUS Part X CALL NOW! **£1795.95**



Icom 7300

Top selling HF/50/70MHz
100W SDR Transceiver

GENEROUS Part X CALL NOW! **£1195.95**



Icom 7610

SDR HF+6m 100W transceiver
7" full colour touch display

GENEROUS Part X CALL NOW! **£2999.95**



Yaesu FTdx-101D

SDR HF/50/70MHz 100W Transceiver
Cashbacks valid until 31 December 2020

Price after cashback ~~£3149.95~~ **£3059.95**



Yaesu FTdx-101MP

New 200W version
Cashbacks valid until 31 December 2020

Price after cashback ~~£4199.95~~ **£4109.95**



Yaesu FT-991A

Full coverage HF/VHF/UHF Transceiver
Cashbacks valid until 31 December 2020

Price after cashback ~~£1229.95~~ **£1149.95**



Yaesu FTM300DE

Dual Band Digital/FM Transceiver
Latest updated version!

£399.95



Yaesu FT-818ND

Portable Multi-Band with 6W output
Cashbacks valid until 31 December 2020

Price after cashback ~~£599.95~~ **£529.95**



Yaesu FTM-300DE

50W Dual Band Digital Transceiver
Cashbacks valid until 31 December 2020

Price after cashback ~~£399.95~~ **£364.95**



Yaesu FTdx-3000

100W Classic HF/50MHz Transceiver

GENEROUS Part X CALL NOW! **£1399.95**



Yaesu FT-450D

100W HF/6m Transceiver with ATU
Ideal 1st radio

£649.95



Yaesu FTM-400

Dual Band UHF/VHF Transceiver
C4FM Digital

£389.95



Icom IC-7100

HF/VHF/UHF 4m Transceiver
Remote control head

£999.95



Icom IC-R8600

Wideband Communications Receiver

GENEROUS Part X CALL NOW! **£2499.99**



Alinco DR-735E

50W VHF/UHF with 'rainbow' display
Remote head option

£349.95



Icom ID-52E

D-STAR Digital
Handheld Transceiver
Expanded airband RX
Louder audio

£499.95



Yaesu FT-3DE

C4FM/FM Dual Band
Loud audio, Voice
record, GPS,
Bluetooth, lots more!

£399.95



Alinco DJ-MD5-GPS

Professional quality DMR
Digital/Analogue
Handheld with GPS

£159.95

DJ-MD5
Standard version as above -
but no GPS

£149.95

Your ORDERS
are being
shipped as fast
as we can!

Goods are being
collected daily by
our couriers and
delivered to
you as fast
as possible



Low Loss Coax Cable



You only fit it once so fit the best!

ECOFLEX series

- Extreme low loss
- Flexible
- Lightweight
- Good to 8GHz

ECOFLEX 15,10

SEATEX 10 Marine/outdoor cable

AIRCELL series

- Low Loss
- Flexible
- Small bending radius
- Good to 6GHz

AIRCELL 7, 5

nevada®

Serving our customers for 50 years

• Unit 1 • Fitzherbert Spur • Farlington • Portsmouth • Hampshire • PO6 1TT





follow us on twitter: @NevadaRadio



follow us on facebook: www.facebook.com/nevadaradio



Your ORDERS are still being shipped **SAME DAY** - where possible!

ACOM AMPLIFIERS	ALINCO	AOR	AOR
 Acom 1200S 1.2kW Solid State Amplifier - Covers 1.8-54 MHz - RF sensing for auto band changing or CAT interface for full rig control. - Interfaces with AT-04 Auto tuner/Antenna switch £2799.95	 Alinco DM-30G 30A power supply - Variable Voltage 9 - 15V DC - Low Noise - offset control - Digital Display, Short circuit protection. 2 x Anderson 5A Power Pole connectors 1 x 30A terminals - Weight 1.5kg £109.95	 AOR AR5700D Digital Communications Receiver for the professional user! - Frequency range: 9 kHz - 3.7GHz - Analog modes: FM, AM, SSB, CW, FM video, analogue IQ - Huge range of digital modes - full details on our web £4595.00	 AOR AR DV-1 The Professionals' Choice Advanced Scanning Receiver 100 kHz - 1,300 MHz - SD card slot & record facility - Decodes virtually all popular Digital modes including TETRA £1199.95
NEW  Acom 700S 700W Solid State Amplifier Covers 1.8-54MHz £2499.95 Acom Valve Amplifiers 1500...1.5kW PEP (1.8-54)MHz.....£2999.95 1000...1kW PEP (1.8-50)MHz.....£2199.95 1010...700W PEP (1.8-54)MHz.....£1599.95 Acom Antenna Switch AT-04...1.5kW auto ATU 4 way ant switch.£999.95	 Alinco DM-330MW MkII Communications Grade 30A Supply £149.95 DM-330FXE...30A standard filtered supply.£129.95 DM-30E...30A (peak) digital display.....£99.95 DM30G...30A Anderson Power poles.£109.95	 MFJ-1782X Super Hi-Q loop with tuning controller - Ideal for limited space - Frequency: 10-30MHz (including WARC bands) - Power: 150W - Diameter: 3 foot £599 £479.95	 Palstar AT-2K - Covers 6-160m - Output: 2000W PEP - Optional 4:1 Balun for balanced wire feeders £669.95
MIDLAND	MIDLAND	ROTATORS	ULTRA LOW LOSS COAX
 CT-3000 - Ideal Novice radio 10W/25W Dual Band Mobile - IP54 rated • Colour display - Customisable control buttons PRG-3000 Optional software£26.95 £149.95	 CT-990 High Power 10W Dual Band 2m/70cms colour - IP67 Rated - fully featured - Colour LCD display - Fully featured - Affordable price! £99.95	YAESU G-2800DCX...Extra heavy duty...£929.95 G-5500...Azimuth/Elevation...£654.95 G-1000DCX...Heavy duty...£499.95 G-450C...Standard duty...£339.95 We carry a full range of Yaesu Rotators and Accessories	 Seatec 10 New! Outdoor cable Resistant to UV, oils & moisture! Install on ships, marinas, oil rigs, Amateur Radio Freq: up to 8GHz, Dia: 10.2mm, VF: 0.85 Loss @ 500MHz per 10m = 0.96 dB per metre...£4.65 price per 102m drum £440
MetroVna Network Antenna Analysers	DAIWA METERS	SPID	Ecoflex
NEW  Metropwr FX-700 Portable Vector Network Analyser - Covers 100kHz-700MHz - Touch screen Colour display - Measures R, Z, X (sign), SWR, Phase, Return Loss, TDR, L, C - Smith chart, TDR, Cable length - SD card for data storage £349.95 MetroVna Deluxe Model - Frequency: 1-250MHz - SWR, R, Z, X, phase, filters, return Loss & more! £274.95 MetroVna Pro Mode1-180MHz.....£259.95	NEW  CN-901G UHF SWR/Power Meter 900 MHz-1.3GHz £249.95 CN-103LN 140-525MHz 20/200W N type.....£99.95 CN-501H 1.8-150MHz 15/150/1.5kW.....£109.95 CN-501H2 1.8-150MHz 20/200/2kW.....£119.95 CN-501VN 140-525MHz 20/200W N type.....£99.95 CN-901HP 1.8-200MHz 20/200/2kW.....£149.95 CN-901HP3 140-525MHz 20/200/3kW N type.....£179.95 CN-901VN 140-525MHz, 20/200W N type.....£119.95 High Quality Switches CS-201A 2 Way 600MHz, 1kW SO239.....£24.95 CS201G11 2 Way 1.3GHz, 1.5kW HF N type.....£39.95	Double Worm drive with almost zero backlash, PC control & near silent operation. SPID RAK...medium duty.....£545.95 SPID RAS...medium to heavy duty.....£595.00 SPID RAS...Azimuth/Elevation.....£999.95 SPID RAS-HR...Azimuth/Elevation, hires...£1795 More on our web site! CREATE High Quality Japanese manufacture Using a worm gear for higher Torque RC5-B3 Heavy Duty - Rotating torque 22 kg/m - Brake torque 250 kg/m - Max dia. 48-63mm - Vertical load 700 kg - Horizontal load 1,000 kg - Controller w/preset £1289.95 RC5-A3 Heavy Duty with pre-set - Rotating torque 16 kg/m - Brake torque 200 kg/m - Max dia. 48-63 mm - Vertical load 700 kg - Horizontal load 1000 kg - Variable speed 75-110 £899.95 Medium Duty models RC5-3...Medium/HQ w/pre-set.....£679.95 RC5-1...Medium duty.....£569.95	Ecoflex 15 per metre.....£7.99 price per 102m drum.....£759 Ecoflex 15 plus per metre.....£7.99 price per 102m drum.....£759 PL259 connector (part: 7350).....£8.95 N type connector (part: 7395).....£9.95 Ecoflex 10 per metre.....£3.79 price per 102m drum...£359 Ecoflex 10 Plus per metre...£3.79 price per 102m drum...£359 PL259 connector (part: 7390).....£5.95 N type connector (part: 7367).....£6.50 Aircell 7 per metre...£2.99 price per 102m drum.....£269 PL259 connector (part: 7390).....£2.65 N type connector (part: 7392).....£5.25 Aircell 5 per metre.....£2.75 price per 102m drum.....£259 Other 100M Coax Drums Westflex 103...Semi Air-spaced low loss.....£179.95 RG-213 (Cablex)...Low loss good quality...£99.95 RG-Mini 8...Super XX.....£69.95 RG58/CU...Mill spec.....£39.95 Twin Feeders 450 Ohm...Twin feeder.....£89.00 300 Ohm...Twin feeder.....£76.50 Nevada Antenna Wire Coated flex weave Antenna wire.....£59.95 Nevada KEVLAR - green ultra-strong wire! Nevada 28...2.8mm 2kW...per metre.....£0.99 Nevada 32...3.2mm 5kW...per metre.....£1.20
NEVADA	ANYONE	RC5	SSB
 PS-40M Linear 40A (max) with meter 1.5-15V DC - Cigar adaptor output £129.95 Quality Power Supplies 2 YEAR WARRANTY! PS-08...Linear 8A (max) 13.8V DC.....£34.95 PS-30M...Linear 30A (max) 3-15V DC.....£99.95 PSW-50...Switch mode 50A (max) 9-15V DC.....£129.95 PSW-30...Switch mode 30A (max) 9-15V DC.....£79.95 PSW-30H...Switch mode 30A (max) 9-15V DC.....£69.95 PS23-SW1...Switch mode 23A (max) 13.8V DC.....£59.95 PSW-07...Switch mode 7A (max) 13.8V DC.....£29.95 PSW-04...Switch mode 5A (max) 13.8V DC.....£24.95	With DTMF Mic  AT-588 70MHz 50W FM Transceiver - Frequency: 66 - 88MHz - Memories: 200 - Power: 10W/25W/50W £169.95 NEW  AT-779 70MHz 15W FM Transceiver - Freq: 66 - 88MHz - Power: 15W/10W/5W - Includes programming lead £89.95	RC5-A3 Heavy Duty with pre-set - Rotating torque 16 kg/m - Brake torque 200 kg/m - Max dia. 48-63 mm - Vertical load 700 kg - Horizontal load 1000 kg - Variable speed 75-110 £899.95 Medium Duty models RC5-3...Medium/HQ w/pre-set.....£679.95 RC5-1...Medium duty.....£569.95	 SSB Masthead Preamp SUPER AMP - SERIES Super-low-noise, large-signal handling, protective circuit. High quality Helix filters, Vox control, remote & T bias DC feed. MHP-200R...1.5kW 2m (T-Bias).....£599.95 SP200...750W 2m (T-Bias).....£320.00 SP70...500W 70cm (T-Bias).....£320.00 SP400...750W 4m (T-Bias).....£345.95 SP13B...50W 2.4 GHz (T-Bias).....£499.95 DCW-2004B...Sequencer 6/2/70cm.....£279.95
INRAD	AIRSPY	SDRplay	SSB
 INRAD W-1 Competition Headset Ham radio never sounded so good! - Super comfortable & great audio - Headband tilt-back feature like pro broadcast headsets - Large high response speakers - Boom mic with great transmit audio £179.95 Requires optional adaptor select Icom, Yaesu, Kenwood.....£22.95	NEW  Airspy HF+ Discovery - HF - 0.5 kHz, 31MHz - VHF - 60, 260MHz - Pre-selectors £199.95 AIRSPY R2 24MHz-1,800MHz 10MHz spectrum - Tracking RF filters £199.95 AIRSPY Mini - SDR Dongle 24 - 1,800MHz £119.95	NEW  RSPdx SDR in metal case Covers: 1 kHz - 2GHz Now with Improved: - Performance below 2MHz - Plus more! £194.95 RSP 1A Wideband Budget SDR - Covers: 1 kHz - 2GHz - Software upgradable - Good dynamic range £99.95 RSP DUO Dual Tuner SDR - Covers: 1 kHz - 2GHz - Software upgradable £239.95	 SSB Masthead Preamp SUPER AMP - SERIES Super-low-noise, large-signal handling, protective circuit. High quality Helix filters, Vox control, remote & T bias DC feed. MHP-200R...1.5kW 2m (T-Bias).....£599.95 SP200...750W 2m (T-Bias).....£320.00 SP70...500W 70cm (T-Bias).....£320.00 SP400...750W 4m (T-Bias).....£345.95 SP13B...50W 2.4 GHz (T-Bias).....£499.95 DCW-2004B...Sequencer 6/2/70cm.....£279.95

MUCH MORE ON OUR WEBSITE 24/7 - BACKED BY FRIENDLY, KNOWLEDGEABLE STAFF

OPEN: Mon to Fri 9.00am - 5.30pm
Unit 1 Fitzherbert Spur Farlington
Portsmouth Hampshire PO6 1TT



023 9231 3090

NEW

Vibroplex End Fed Wires

1kW power rated! No external tuner required!

(40 - 10)m65ft....£159.95

(80 - 40)m130ft....£169.95



HIGH PERFORMANCE BEAMS

DUAL Antennas by YU1CF

High Performance Beams using Professional 3D EM modelling



6M Yagis

PA-50-4-3B	4 el. 9.2 dBi 2.92m boom	£139.95
PA-50-6-6BG	6 el. 11.5dBi 5.84m boom	£245.00
PA-50-7-9BG	7 el. 12.7 dBi 8.68m boom	£299.95

Dual Band 6/4

PA5070-7-3	6m 3el 4m 4 element 3m boom	£199.95
PA5070-11-6 BG	6m 5el 4m 6 element 6m boom	£259.95

4M Yagis

PA70-5-3	4m 5 element Yagi 3m boom	£199.95
PA70-6-4	4m 6 element Yagi 6m boom	£219.95

Dual Band 2/70cms

PA144-432-8-09RA	2m 3el 70cms 6 element rear mount	£89.95
PA144-432-37-7-2CBG	2m 12 el 70cms 25 el 2 connectors	£289.95
PA144-432-13-1-5-2CB	2m 5 el 70cms 9 el 2 connectors	£134.95
PA144-432-17-2	2m 6 element 70cms 12 element	£149.95
PA144-432-19-3-2C	2m 7 element 70cms 12 element	£199.95
PA144-432-21-3B	2m 7 element 70cms 14 element	£199.95
PA144-432-13-1-5A	2m 5 el 70cms 9 el 1.5m boom	£134.95
PA144-432-34-6-2CBG	2m 11el, 70cm 23 el 2 conn	£249.95
PA144-432-38-6BG	2m 11 el 70cms 28 element	£225.95

2M Yagis

PA144-5-1.5	2m 5 element Yagi 1.5m boom	£94.95
PA144-6-2	2m 6 element Yagi 2m boom	£119.95
PA144-8-3	2m 8 element Yagi 3m boom	£135.95
PA144-9-5A	2m 9 element portable 4.67m	£174.95
PA144-11-6BG	2m 11 element guyed 5.72m	£199.95
PA144-12-78BP	2m 12 element Yagi	£259.95

70cms Yagis

PA432-8-1.2R	70cms 8 element Yagi 1.2m boom	£89.95
PA432-14-3	70cms 14 element Yagi 3m boom	£145.95
PA432-23-6	70cms 23 element Yagi 6m boom	£199.95
PA432-30-8BG	70cms 30 element Yagi 8m boom	£269.95

23cms Yagis

PA1296-13-1R	23cms 13 element 1m rear mount	£99.95
PA1296-18-1.5AR	23cms 18 el 1.5m rear mount	£139.95
PA1296-36-3BRG	23cms 36 element 3m RG Balun	£169.95
PA1296-36-3BUT	23cms 36 el 3m Teflon Balun	£189.95
PA1296-70-6RG	23cms 70 element 6m RG Balun	£225.95

Power Dividers

PD1024 144MHz	2 way power divider, 1.5kW	£79.95
---------------	----------------------------	--------

Passband Filter

DUAL BPF2	1.5kW 2m BandPass Filter 144-148MHz	£225.00
-----------	-------------------------------------	---------

CREATE - ANTENNAS

As used by the 'Professionals'



CLP-5130-1N
21 Element Log Periodic Beam
• 50-1300MHz
• 500W
• Gain: 10-12dBi

£379.95



CLP-5130-2N
17 Element Log Periodic Beam
• 105-1300MHz
• 500W

£299.95

SPIDERBEAM

Telescopic Masts and Poles



Fibreglass Telescopic Poles

12mtr Heavy Duty	£99.95
18mtr Standard	£199.95
22m "Long John" NEW	£399.95
26mtr Standard	£499.95
Base Plate for Fibreglass Poles	£28.95

Aluminium Telescopic masts German engineered!

10 metre Standard (1.35m retracted)	£339.95
10 metre Heavy Duty (1.7m retracted)	£359.95
12.5 metre (1.65m retracted)	£399.95
14.5 metre Heavy Duty (2m retracted)	£499.95
15 metre Standard (2m retracted)	£459.95

MAT -Tuners - factory direct!

MAT-1500 NEW! High power tuner!



- Power: 1.5kW
- Freq: 3.5-54MHz
- Fast tuning!

£499.95

MAT-705 for Icom 705



- Freq: 1.8 - 54MHz
- Powered by 9V Alkaline battery

£229.95

MAT-40 Outdoor Auto-tuner



- Freq: 1.8-54MHz
- Power: 0.1-120W
- Tunes from 10ft + wires

£244.95

Requires adaptor cable for your rig
Request when ordering, Icom, Yaesu, Kenwood

MAT-30 For Yaesu radios



- Freq: 1.8-54MHz
- Power: 0.1-120W
- Interface cable supplied

£189.95

MAT-125E General purpose Auto Tuner with internal battery



- Freq: 1.8-54MHz
- Power: 0.1-120W

£189.95

MAT-180H For modern Icom & Kenwood radios

(Supplied with Icom interface lead). Allows manual tuning also



- Freq: 1.8-54MHz
- Power: 0.1-120W

£174.95



MAT-10

'One touch' tuner for Yaesu FT-818/817
Can also be used with any QRP transceiver

- Freq: 1.8-54MHz
- Power: 30W

£219.95

MAT-K100 For Icom & Kenwood radios (Kenwood lead included)



- Freq: 1.8-54 MHz
- Power: 0.1-120W

£189.95

SIRIO ANTENNAS

Quality Antennas from Italy!



WY400-10N

- 70cms 10 element
- Wideband 400-470MHz
- Boom: 2m, Gain: 14 dBi

SPECIAL!

£449.00

£99.95

VHF/UHF Verticals

CX4-68	(68 - 73)MHz 4m 4.15 dBi	£69.95
CX440	(440 - 455)MHz pmr 4.15 dBi	£ 39.95
CX455	(455 - 470)MHz pmr 4.15 dBi	£39.95
TORNADO 50-60	(50 - 60)MHz 6m 3.5dBi	£59.95

HF/VHF/UHF Beams

SY3	3 element (26-28)MHz 10.65 dBi	£99.95
SY4	3 element (26-28)MHz 13.15 dBi	£119.95
SY50-3	3 element 50MHz 8.5 dBi	£99.95
SY50-5	5 element 50MHz 10.5dBi	£129.95
SY68-3	3 element 70MHz 7.0 dBi	£79.95
WY108-3N	3 element 108-137MHz 3 el. Air Band	£89.95
WY140-6N	6 element 144MHz (wide band) 10.5dBi	£99.95
WY400-6N	6 element 432MHz (wide band) 11.0dBi	£79.95
WY400-10N	10 element 432MHz (wide band) 14.0dBi	£119.00

HUSTLER HF VERTICALS

4 BTV	40 - 10m 6.25m high	£199.95
5 BTV	80 - 10m (5 bands) 7.46m	£249.95
6 BTV	80 - 10m (6 bands) 7.3m	£289.95

Mobiles for HF and CB radio in stock too!

COMET

HF BASE ANTENNAS

CHA-250BX11	3.5 - 57MHz (RX: 2.0 - 90MHz)	£349.00
CWA-1000	Multi Band dipole 3.5/7/14/21/28MHz	£124.95
AB1230H	Handheld Airband Antenna - RX only	£29.95
AB380	Civil/Military Base Antenna -RX only	£89.95

VHF/UHF FIBREGLASS BASE ANTENNAS

GP-15N	50/144/430MHz, length 2.4m N Type	£109.95
GP-1M	144/430MHz length 1.2m (SO239)	£59.95
GP-3M	144/430MHz, 50-239 Lgh 1.78m (SO239)	£69.95
GP-6M	144/430MHz, 50-239 Lgh 3.07m (SO239)	£99.95
GP-93N	144/430/1200MHz, Length 1.78m N Type	£99.99
GP-9M	144/430MHz 50-239 Lgh 5.15m (SO239)	£149.95
GP285	VHF 5/8 Collinear 135 - 175MHz 3.34m	£89.95

VHF/UHF BEAMS

CYA-1216E	16 Element 1200MHz N Type	£99.95
CA-52HB	2 Element HB9CV for 50MHz	£79.95
CA-52HB4	4 Element HB9CV for 50MHz	£129.95
CYA2414	2.4 GHz 14 Element Yagi 15.5 dBi 0.75m	£99.95

MOBILE ANTENNAS

SB7500	Hi Gain 144/430MHz length 1.05m	£59.95
SB7700	Hi Gain 144/430MHz length 1.28m	£69.95
SB7900	Hi Gain 144/430MHz length 1.56m	£79.95
CSW201G	2 Way Antenna Switch SO239 1kW 600MHz	£29.95

ANTENNA TUNER

CAT-300	1.8-56MHz, 300W (PEP)	£199.95
CAT-10	10W Antenna tuner (3.5 - 50)MHz	£129.95

BALUNS

CBL-1000	1.7-30MHz, 1kW/CW	£34.95
CBL-2500	1.8-56MHz, 2.5kW/CW	£39.95

LOW PASS FILTERS

CF-30MR	1.8 - 32MHz, 1kW/CW	£59.95
CF-50MR	1.8 - 57MHz, 1kW/CW	£59.95

TRIPLEXERS

CFX431A	144/430/1200 MHz N/P/U/L	£89.95
CFX514N	50/144/430 MHz N/P/U/L	£69.95

DUPLEXERS

CF-360A	1.3-30/49-470MHz 24leads SO239 socket	£49.95
CF-4160B	1.3-170/350-540MHz SO239 N Type, SO239	£39.95
CF-416A	1.3-170/350-540MHz SO239 + 2 x PL259 leads	£39.95
CF-416B	SO239 + 1 x PL259/N leads	£39.95
CF-503C	1.3-90/125-470MHz, PL259 lead, 2xSO239	£49.95
CF-530C	1.3-90/125-470MHz, 2x SO239, PL259 lead	£49.95
CF-530C	1.3-90/125-470MHz, SO239 2 x PL259 lead	£49.95
CF-706	1.3-57/75-550MHz, SO239, 2 x PL259 leads	£49.95
CF-706N	1.3-57/75-550MHz, SO239 N type, PL259 leads	£49.95

CROSS NEEDLE SWR/POWER METERS

CMX-200	1.8-200MHz, 30/300/3k	£79.95
CMX-400	140-525MHz, 30/60/300W	£89.95

ACCESSORIES

CSW201G	2 Way Ant. Switch - SO239 1kW 600MHz	£29.95
CS400P	Lightning Arrestor DC-500MHz 500W	£29.95

Lots more COMET on our website

DIAMOND BASE ANTENNAS

V-2000	6m/2m/70cm 2.15dBi/6.2dBi/8.4dBi, 2.5m PL	£109.95
VX-30PL	2m/70cm 2.15/5.5dBi, 1.3m PL (Digital FT8)	£49.95
VX-30N	2m/70cm 2.15/5.5dBi, 1.3m N (Digital FT8)	£49.95
X-30PL	2m/70cm 3.0/5.5dBi, 1.3m PL	£49.95
X-30N	2m/70cm 3.0/5.5dBi, 1.3m N	£59.95
X-50N	2m/70cm 4.5/7.2dBi, 1.7m N	£59.95
X-50PL	2m/70cm 4.5/7.2dBi, 1.7m PL	£59.95
X-200N	2m/70cm 6.0/8dB, 2.5m PL	£89.95
X-200PL	2m/70cm 6.0/8dB, 2.5m PL	£79.95
X-300N	2m/70cm 6.5/9dB, 3.1m N	£109.95
X-700H	2m/70cm 9.3/13dB, 7.2m N	£279.95
X-5000	2m/70cm/23cm 4.5/8.3/11.7dB N	£124.95
X-7000	2m/70cm/23cm 8.3/11.7/13.7dB N	£199.95
D-777	VHF/UHF Airband 3.4dB/5.5dBi 1.7m PL	£69.95
D-3000N	Discone 25-1300MHz TX/RX, 1.7m N	£127.95

WATSON WEATHER STATIONS



W8681-Pro II

Fully featured weather station with:

- Wi-Fi and colour display
- Shows: Humidity, temp, Winds speed, Direction, Pressure, Rainfall, Lux meter, Windchill, Dew point
- Internet connectivity
- Micro SD card slot

£229.95

Other models:

W-8686	Wi-Fi, colour display	£189.95
W-8681 MKII	Wireless, mono display	£89.95
W-8682-MKII	Wireless, mono display	£69.95

PRICE PLEDGE WE ALWAYS AIM TO BE COMPETITIVE - SEEN IT CHEAPER? LET US KNOW!

www.nevadaradio.co.uk

Colin Redwood G6MXL
practicalwireless@wamersgroup.co.uk

This month I am introducing readers to data modes. I'll be covering the absolute basics this time, and I'll look at them in more depth in a future issue. I'll also look at some additional resources for those studying for their UK amateur radio exams.

What Are Data Modes?

Data modes are ways of communicating over amateur radio frequencies using computers at each end, without using a microphone or Morse key. To avoid confusion, I am not talking about digital voice modes such as DMR, Fusion and D-STAR. The data modes most commonly encountered on the HF bands include FT8, RTTY, PSK31 and SSTV, although I should point out that there are numerous others. Data modes are also used on the VHF/UHF and SHF bands particularly for various weak signal activities.

As I'll show, you don't have to be a flash-fingered typist to operate data modes, as most programs enable macros to be used to handle common items such as your callsign, QTH etc. In fact, it is possible to have basic contacts without using a keyboard at all – just by clicking with a mouse!

One particular advantage of data modes is that they are quiet in a domestic setting enabling operating when others are asleep. No shouting "CQ" is needed! They are ideal modes for those with hearing difficulties. Data modes generally don't need high power, so you can make the most of your Foundation licence power.

Equipment Needed

You'll need a computer and an SSB transceiver (although you could use them on FM if you really want to). Somewhere in your setup, you'll need to have a sound card. This can be in the computer (almost all computers have a built-in sound card these days), your transceiver or in a stand-alone box between the computer and transceiver. If you are considering using the sound card built into your computer, you'll need to make sure you switch off anything that might generate sounds from the operating system – email, internet, CD player, videos etc. – otherwise you risk them being transmitted and violating your licence conditions. Quite a few modern transceivers (generally the more expensive models) have built-in sound cards (Table 1). If you have such a transceiver, then I'd suggest using the

Getting Started (Part V)

Colin Redwood G6MXL looks at starting on the data modes.



sound card in your transceiver.

There are many commercial interface units on the market that incorporate built-in sound cards, Fig. 1. If you buy one of these, you'll need to make sure that you get one with a suitable lead to connect to your particular transceiver. Just because the plug has the right number of pins doesn't mean it is wired correctly for your particular transceiver. You'll also need to check this if you subsequently buy a new transceiver.

If you are using a sound card that is not part of your computer, then you'll also need a Universal Serial Bus (USB) lead to go between a USB socket on your computer to the interface or transceiver with the sound card in it.

While a suitable lead is usually supplied with the interface, you may need a longer one. These can readily be obtained in a variety of lengths from multiple suppliers (e.g. eBay and Amazon).

Software Needed

You'll need to run the correct software for the data mode that you intend to use. Table 2 lists some suggested programs for the various modes. There is a greater choice for Windows than other platforms.

Various Modes

As I mentioned at the start there are many different data modes. They each have various characteristics, which will no doubt appeal more to some amateurs than others. The good thing is that you can try any or all of these modes as long as you have a reasonably modern computer, sound card and SSB transceiver. You don't have to stick to one data mode.

RTTY

Radio Teletype (RTTY) can be considered as the grandad of the data modes. The signal actually transmitted is the same as that transmitted by the old electro-mechanical teleprinters. You are limited to transmitting capital letters and numbers, Fig. 2. There are no constraints on the length of messages that are transmitted. There is no error correction in RTTY, so any man-made noise (QRM), natural noise (QRN) or fading (QSB) can corrupt the message.

Unlike phone contacts made with a microphone and the other data modes, you'll normally need to use Lower sideband (LSB) rather than Upper sideband on all the HF bands, although this varies with the software you are using. But, in any case, expect your software to have a reverse (REV) facility to decode signals that are sent in the reverse polarity.

PSK31

Until the arrival of FT8 about four years ago, PSK31 and the faster PSK63 had established themselves as very popular data modes. PSK31 and PSK63 allow upper- and lower-case letters, numbers and punctuation to be transmitted. Messages of any length can be transmitted. Some limited error correction is built-in, so it is not as prone to QRM, QRN or QSB as RTTY, Fig. 3.

FT8


The arrival of FT8 a few years ago and more recently FT4 developed by American Nobel Prize laureate Joe Taylor K1JT, has completely transformed the amateur radio data mode world. These modes are all based on a meticulously prescribed message format with strict timing of overs (e.g. every 1.5 seconds with FT8, every 7.5 seconds with FT4). QSOs are limited to the exchange of call-signs, reports and locators. Powerful software, WSJT-X, is used to pull weak signals containing the messages out of the noise. If you are tempted try WSJT-X, make sure that you download a current version – this is an evolving area, and occasionally transmitted message formats are not compatible with those from previous versions. High levels of error correction are incorporated, so you'll either get 100% of a message or none at all.

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk



Fig. 1: The SignalLink USB is a popular interface between computers and transceivers. **Fig. 2:** RTTY messages can become corrupted due to QRM, QRN and QSB. **Fig. 3:** The Elecraft K3S transceiver includes a built-in sound card. It can be connected to a computer simply with just a USB lead plugged into the rear panel shown here. **Fig. 4:** An FT4 contact with Thailand on 20m using just 10 Watts to a dipole antenna at about 6m above ground level. **Fig. 5:** An SSTV picture received from the International Space Station (ISS). **Fig. 6:** The Full Licence Manual is essential reading for those studying for their Full Licence exam. **Fig. 7:** The Exam Secrets book contains some additional material for all three exams as well mock exam questions.

Many amateurs dislike the constraints of these weak signal modes or claim that they take away all the skill of an amateur radio operator, and that it is too automated. Despite these claims, FT8 and FT4 have enabled many DX contacts to take place during periods of poor HF propagation associated with the current sunspot minimum, **Fig. 4**. These modes all require your computer's clock to be accurate to within a second or so. I normally synchronise the time on my computer each time before I start an operating session using FT8 or FT4, which I find quite sufficient. Apart from this, operation of FT8 and FT4, is remarkably simple

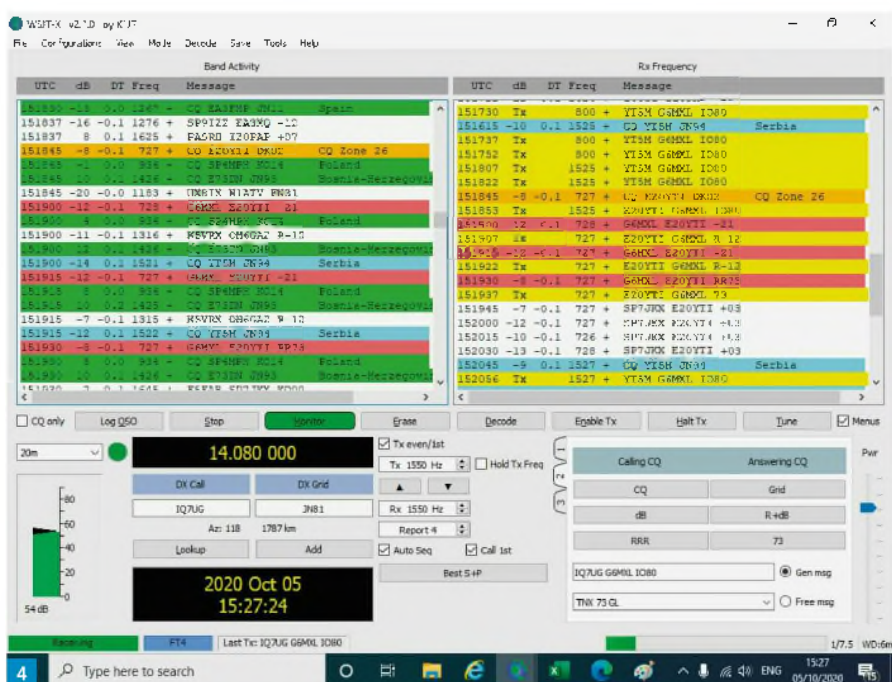


and in practice certainly doesn't need any more skill than other data modes.

SSTV

Slow Scan Television (SSTV) is a way of transmitting still pictures over the air as audio tones. The picture is transmitted and received one line at a time, so that the picture builds up on the screen of the receiving station over a period of typically one to two minutes. There is wide choice of SSTV modes, which offer various trade-offs of picture size and resolution for speed of transmission. Both the transmitting and receiving stations must be using the same SSTV mode if a picture is to be successfully received. There is little if any error correction in most analogue SSTV modes. There are also some pure digital SSTV protocols. If you like to show off to your friends and colleagues, then it is quite easy to receive SSTV pictures from the International Space Station (ISS), **Fig. 5**.

Don't Overdrive

Data modes are not forgiving of overdriven transmitters. By this I mean that when transmitting, the audio level must be kept down to a level where the transmitter's automatic level control (ALC) doesn't need to operate. Switch off any audio compression and any other processing that you might use with normal voice transmissions. You can then adjust the signal going into your sound card either on your computer or on the interface unit. You may find that you'll need to make small

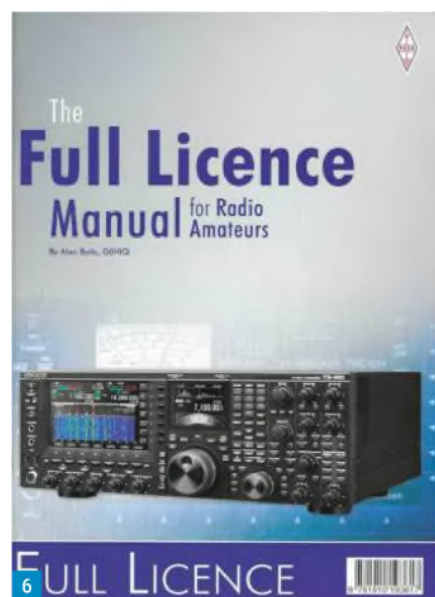

adjustments between different programs. A really clean signal will get you more contacts than an overdriven signal. You'll also find that you don't need to run high power to make contacts.

Elecraft K3S
Flex-6400
Icom IC-705
Icom IC-7100
Icom IC-7300
Kenwood TS-590S & SG
Yaesu FT-991 & 991A
Yaesu FTD3000

Table 1: Transceivers with built-in sound cards.

Macros

Most programs for RTTY, PSK31 and PSK63 allow operators to build macros to reduce the amount of typing needed for operating, particularly for basic QSOs involving just the exchange of callsigns, reports etc. Some have ready-made macros that can be used to get started.

Configuration

Data mode programs can be installed in the usual way you install any other software on your computer. Once installed you'll need to do some configuration. As a minimum, you'll need to tell the software which sound card to use. You'll also need to set your call sign. There will be other aspects that you'll need to configure according to the mode and program.

Intermediate Courses

In the October 2020 issue, I mentioned the videos from the Harrow club, **William McFarland GM6DX's** Intermediate Course and The Online Amateur Radio Community's fast-track Intermediate Course. The Bath Distance Learning Team (BDLT) are restarting their training for the Intermediate Exam.

The BDLT established a reputation for high quality training under the old syllabus and helped hundreds of students to pass exams with pass rates consistently above the national average. The first new BDLT course will be for the Intermediate level and will run from November 2020 to March 2021. Students will receive weekly work packages via a virtual classroom and will have access to weekly online tutorials and revision quizzes. Students will also have access to one of the remote tutors who will provide feedback and additional guidance when required.

The BDLT course will include lots of practical exercises to bring the theory to life. Students will be expected to do the exercises at home and report their results. At the end of the course there will be a number of mock exams. There will be no charge for the training but a refundable deposit of £30 will be required to secure a place. Students

Program	Windows	Linux	Mac
WSJT-X	Yes	Yes	Yes
Fldigi	Yes	Yes	Yes
MixW	Yes	No	No
MMVARI	Yes	No	No
MMSSTV	Yes	No	No
MMTTY	Yes	No	No
2Tone	Yes	No	No
Airlink Express	Yes	No	No

Main Modes
FT8, FT4, Others
PSK31/63, RTTY, Others
PSK31/63, RTTY, others
PSH31/63, RTTY, others
Analogue SSTV Modes
RTTY Only
RTTY only
PSK31, PSK63, RTTY

Table 2: Some popular software for various data modes.

will need to provide their own textbooks, electronic parts and toolkits. Students will also have to arrange their own exam at the end of the course, but advice will be provided. It seems likely that the exams will be on-line with remote invigilation. To register your interest, please e-mail BDLT Leader, **Steve G0FUW**, via g0fuw@tiscali.co.uk

Full Licences

Readers who are studying for their Full Licence will no doubt be pleased with the announcement from the RSGB that Full Licence exams are now available online with remote invigilation.

At present I am not aware of any online or remote training courses for the Full Licence exam, although the BDLT are planning to run a Full level course running from March to July next year, which will follow on from their Intermediate course. A further announcement will be made in the New Year when that course is ready for enrolment.

Full Licence Book

As with the Foundation and Intermediate exams, you should obtain an up-to-date copy of *The Full Licence Manual for Radio Amateurs* by **Alan Betts G0HIQ**, Fig. 6. You can obtain the book from the PW Bookshop or the RSGB.

You should also visit the RSGB website and download and print the reference data booklet for the Full exam as you'll find it will assist you in answering several questions: <https://tinyurl.com/y6eb8st8>

I'd also suggest downloading a copy of the Full exam syllabus from the RSGB website. It clearly distinguishes between things you need to just remember ('recall') and topics where you need to 'understand' something. You'll note a higher proportion of 'understand' topics than at Foundation and Intermediate levels.

<https://tinyurl.com/yxu6zll8>

Exam Secrets Book

I'd certainly recommend obtaining a copy of the *Exam Secrets* book, also by Alan



Betts G0HIQ, Fig. 7. It has material that will help those preparing for the Foundation and Intermediate exams but it really comes into its own for those studying for the Full Exam. It covers a number of topics that candidates have found to be difficult, and includes mock questions for just about every item of the syllabus. This book should be considered as an addition, rather than an alternative, to the respective Foundation, Intermediate and Full Licence books.

Remotely Invigilated Exams

The arrangements for remotely invigilated online exams are still proving immensely popular, with about 600 candidates sitting exams every month. If you're considering booking an exam, don't delay, as at the time of writing in early October, the earliest available slots are over a month away.

RSGB Foundation Video

Many newcomers over recent months will have missed out on the Foundation practical exercises. To make up for that, the RSGB have produced a 30-minute video that covers the material in a very digestible manner. The video is also available in six bit-size chunks:

<https://tinyurl.com/y4cx4v6f>

ML&S Trusted by the World's Most Famous Brands

QRP SDR with a twist Introducing the ELAD FDM-Duo Range

Elad FDM-DUO

Direct from the ELAD factory in Italy the FDM-Duo is a compact 5W SDR 160m-6m QRP Transceiver with unique modes of operation.

If you don't wish to be tethered to a PC like so many SDR products the Elad FDM Duo will work as a stand-alone rig offering performance far in advance of anything available today. Connect to a PC & you open up a new world of advanced SDR communications.



FDM-DUO IN BLACK, RED OR SILVER FROM £959.95

RECEIVE ONLY VERSION ALSO AVAILABLE: £749.95



Elad Amplifier DUO ART

HF and 50MHz, 60 or 120W amplifier. Includes power supply, preselectors and remote controller for FDM-DUO.

60W Version£949.95
120W Version£1049.95

Elad Companion Speaker SP1 for FDM-Duo £134.95



LATEST DMR DUAL BANDERS FROM ANYTONE & TYT



TYT TH-9800
MLS £199.95

50W Quad-band Mobile Radio. Two way 26-950MHz RX. Full Duplex. 809 Channels.

ANYTONE AT-D578UV

270 DMR & FM 50W/45W APRS. digital roaming & Bluetooth.



MLS PRICE: ONLY £349.95



TYT MD-UV380

Enter the new digital age in style with the TYT MD-UV380 DMR Digital Portable Two Way Radio!

DUAL BAND VHF/UHF DMR HANDHELD 137-174/400-480MHz DMR Handie 5W.

RRP £139.95 MLS £89.95



ANYTONE AT-D878UV PLUS

(Bluetooth) / 3100. Digital DMR Dual-band Handheld Commercial Radio.

MLS PRICE: ONLY £199.95

FUNcube Dongle Pro+



The Original & Best Wideband SDR Receiver. 150kHz-1.9GHz incl SAW Filters.

www.HamRadio.co.uk/funcube

MLS: £149.95

Wouxun KG-UV9K Pro Pack

New version of the ever popular UV90 - the UV9K! Now with 8.33 step.

- KG-UV9K Transceiver
- Two batteries
- Two belt-clips
- Software and transfer data cable
- Fast charger dock and Power Supply
- Hand speaker mic
- Battery eliminator
- Manual
- Wrist strap
- Leather case
- In-car charger
- SMA-PL259 adaptor
- Hands-Free kit



ALL THIS FOR JUST £144.95

The New Wouxun KG-UV8H 4m + 2m Handie



With a huge 7.5W on 70MHz & 9.5W on 144MHz, colour screen, voice announcement, 999 memories & PC programmable.

INTRODUCTORY PRICE JUST £99.95

Wouxun KG-UV980PL



Up to 50W (band dependent). Unique Quadband mobile/base from Wouxun. Bands covered are 4m / 6m / 2m / 70cm.

Includes FREE programming software. MLS PRICE: JUST £289.95

The New KG-UV9D Mate



2m + 70cm Bright Orange Rugged High Power (8W+7W) Dual-band Handie ideally designed for emergency operations. Supplied complete & ready to go.

MLS PRICE: JUST £139.95

The next generation of transceivers from FlexRadio



ML&S are proud to be the only Authorised UK Distributor for FlexRadio SDR Products & Accessories

FLEX 6400: £2179.95 FLEX 6400M: £3099.00
FLEX 6600: £3999.95 FLEX 6600M: £4999.00

See: www.HamRadio.co.uk/flex

Advanced SDR available with or without front panels.



SDRplay RSPduo

Dual Tuner 14-bit SDR.

Dual-Tuner wideband full feature 14-bit SDR, 1kHz to 2GHz, 10MHz of spectrum visibility. Simultaneously monitor 2 separate 2MHz bands of spectrum between 1kHz and 2GHz. 3 software selectable antenna inputs, & clocking features ideally suited to industrial, scientific, Ham & educational applications. Windows 10.



MLS PRICE: ONLY £239.95

SDRplay RSP1a



1kHz-2GHz & 10MHz BW.

Brand new design, the RSP1A is a major upgrade to the popular RSP1 offering a powerful wideband full featured SDR covering 1kHz to 2GHz & up to 10MHz visible bandwidth. Better still, it's "Built & Designed in Britain"!!

MLS PRICE: ONLY £99.95

SDRplay RSPdx

Mid-range SDRplay Radio.

Complete redesign of the popular mid-range RSP2pro 1kHz-2GHz receiver. Multiple antenna selection, Improved pre-selection filters, Even more software, Selectable attenuation steps, Special HDR (High Dynamic Range) mode for reception at frequencies below 2MHz.



MLS PRICE: ONLY £194.95

Anan 7000DLE MKII

100W 1.8-55MHz Full SDR Transceiver. The most advanced SDR on the market today. NEW LOW PRICE! £2899.95



Expert Electronics SunSDr2dx

HF/6m/2m Transceiver.

The most innovative small-form factor SDR transceiver from Expert Electronics. HF-6-2m, 100W/50W/4-slice receiver, 80MHz Bandscope.

MLS PRICE: ONLY £1899.95

Click: HamRadio.co.uk/sdr2dx



ML&S are the sole UK distributors for the new ZUMspot RPi, an advanced radio module board.

All ZUMspot Packages supplied by ML&S include:

ZUMspot Pi UHF Board, UHF Antenna, Raspberry Pi Zero WH, MMDVM software and Plastic Case.

ZUMspot RPi New Updated Version

ASSEMBLED AND TESTED: £159.95

Featuring DMR, D-Star, C4FM, P25 & NXDN Hotspot.

Advanced Radio Module Board. Paired with a Raspberry Pi and the MMDVM software becomes a small and efficient multi-mode digital hotspot.



Zum Spot USB!



For more info see HamRadio.co.uk/ZUMspot

Zumspot Dualband RPi (Board only - case included)



MLS PRICE: ONLY £159.95

ZumSpot RPi Duplex (Top Board Only)



MLS PRICE: ONLY £149.94

Zum AMBE Server (Board Only)

Allows for audio transcoding for DSTAR, DMR, Fusion, P25 and NXDN. It also supports some variants of dPMR.

MLS PRICE: ONLY £169.96

The ZUM-Spot USB new from K1GZU/VL uses the very popular BlueDV software to create a very versatile and simple to setup PC based hotspot. The ZUM USB3 comes ready to go with a small antenna and a very classy high quality case. It is a huge upgrade on the very popular DV4Mini and the BlueDV software is the cherry on the cake.

MLS PRICE: ONLY £109.95



**MARTIN LYNCH
& SONS LTD**



THE WORLD FAMOUS HAM RADIO STORE

ML&S
0345 2300 599

Wessex House, Drake Avenue, Staines, Middlesex TW18 2AP

E-mail: sales@hamradio.co.uk

Opening Hours: Mon - Fri: 8.30am to 5pm. Sat: 9am to 4.30pm.

International Tel: +44 1932 567 333

www.HamRadio.co.uk

SAFE ONLINE SHOPPING: E&OE



You can still call 0345 2300 599
or order via our web site and
Click & Collect.

**Yaesu FTdx101D
& FTdx101MP**



**YAESU
CASHBACK**
Expires 31st Dec.
£90

Back In stock but not for long!

Give Tony, my Sales Manager, a call on 0345 2300 599 for a
super trade-in deal.

Yaesu FTdx5000MP LTD

HF/50MHz 200W Transceiver Twin RX



ML&S PRICE: £3395.95

Beautifully built and the original choice of CoDX operators worldwide.

Read Peter Hart's summary in the RadCom review, he hits the nail
on the head.

Yaesu FTdx3000

HF/6m Base Station.
Looking for a HF/6m
Base Station sized
radio at a VERY
LOW PRICE?



ML&S PRICE: £1299.95

Yaesu FTM-400XDE

The Yaesu FTM-400XDE is
a Duoband transceiver for
144/430MHz with the new C4FM/
FDMA Digital Mode.

RRP: £755.94 ML&S: £419.95



More and more of you are watching MLandS TV on YouTube.

A new episode each and every week presented to you by Martin
G4HKS covering a range of topics relating to our hobby.



Something for the Weekend - every week!
Have you tuned in yet?
In an exclusive interview, Martin &
Gary talk to Expert Electronics in
St Petersburg Russia on their very
successful SDR manufacturing business.

One simple URL **www.MLandS.TV**
You Sit back & Enjoy! You

YAESU
The radio

**ML&S Officially The
Largest UK Dealer &
Distributor of Yaesu
Musen products**

Yaesu FT-991a

Stock is hard to get even though we're supplied from the factory
direct from Japan.



Order TODAY £1299.95

It's only been out a couple of years, but over the last 12 weeks sales of this fantastic all-band
all mode transceiver have gone through the roof. Its compact dimensions and typical super-
sturdy Yaesu construction just adds to its spectacular performance.

Yaesu FT-818ND

Dreaming about a QRP
Transceiver with HF/6/2/70
all mode that you can sling in
your carry bag? The successor
to the famous FT-817 introduced
20 years ago, the new '818 has
6 Watts of power output from
external 13.8V DC & has a larger
internal 1.9Amp battery for
longer field operation. TCXO-9
high stability reference oscillator
is now standard & can even
generate 2W of AM for those Top
Band rag chews. You listening
G4HKS?

New version of the best selling
FT-817ND. Now with 6W output
& bigger battery.



**YAESU
CASHBACK**
Expires 31st Dec.
£70

IN STOCK & READY TO SHIP OR COLLECT IN
STORE. £649.95

NEW Yaesu FTM-300DE

50W C4FM/FM Mobile.

We are pleased to introduce the new 50W C4FM/FM
144/430MHz Dual Band Digital Mobile Transceiver.

Hopefully the Covid delays in parts needed by the factory have
caught up & we now have stock of Yaesu's new C4FM/FM 50W
mobile/base. Check our website but no question this model
will become their best-selling Dual bander.



**YAESU
CASHBACK**
Expires 31st Dec.
£35

Yaesu FT-3DE

ML&S PRICE: £379.95

Latest 5W C4FM/FM Handle

The new FT-3DE provides reliable 5W RF power output in a compact,
light weight design.

A mobile device with the Digital Mode C4FM! In addition, thanks to the Yaesu
Dual Mode system, this radio can, of course, transmit in Analog FM. The FTM-
400XDE has a 3.5-inch colour touch screen. The number of control buttons is
reduced to 4 buttons and keys. All important settings are selected directly by
pressing on the display. The FT-400DE supports 3 Digital and 1 Analog Mode.



SEE
WEB
FOR
LATEST
OFFER

For the entire range of Yaesu Base Station,
Mobile, Handhelds & Accessories see the
original website that really matters.

www.HamRadio.co.uk
No hyphens, .stores, .shops or any other copy-cat imitations.



FOLLOW US ON TWITTER AND FACEBOOK HamRadioUK

Have you got yours yet?

New Icom IC-705

HF/6/2/70 SDR. 5W TRANSPORTABLE (10W ON EXTERNAL POWER)



Now available from stock

Check out our special **Bundle Offers** on this incredible portable battery powered 160m-70cm all mode transceiver today.



Icom LC-192 Multi-function Backpack £156.00
MyDEL MP-705, 8 Amp PSU £39.95
MAT-705 Micro Auto-Antenna Tuner £219.95

ML&S PRICE: £1299.95
See HamRadio.co.uk/IC705
Full Unboxing & demo video
www.MLandsTV

Icom IC-7610



The Icom IC-7610 is a complete redesign of the former IC-7600 following on from the huge success of the IC-7300. 100W, Dual band receive and a huge widescreen display.

RRP: £3499.95
ML&S: £2999.95
WITH FREE
SP-41 BASE SPEAKER

SEE WEBSITE FOR FULL INFORMATION ON THIS BRILLIANT TRANSCEIVER FROM ICOM.

Icom IC-7100

HF/6m/4m/2m/70cm D-Star Base & Mobile Transceiver with remote control head unit.

How many of you spotted the Icom IC-7100 when it was introduced? If you didn't take any notice of the spec, now's the time to have a proper gander at this great radio covering 160-10, 6/4/2/70. It was Icom's first venture into featuring 4m as standard on some of their products and I'm pleased to see they've continued the trend ever since.

At a discounted price of £999.95 you're getting a very special Touch-Screen display radio, all-mode including D-Star, remote control via the optional Icom RS-BA1 & more.



ML&S PRICE: £999.95

Check out the SFTW video May 29th on MLandsTV on YouTube



Icom IC-R8600

New 100kHz-36MHz Receiver with SDR technology from IC-7300.

ML&S PRICE: £2499.95

KENWOOD

New JVC-Kenwood shipment now available!

KENWOOD TS-890S HF/50MHZ/70MHZ BASE STATION

Full Down Conversion and Roofing Filters Promise the Best Performance of Your DX Life.

FULL operation on HF/6m/4m (yes, it really has 70MHz!)

Full Down Conversion RX H-mode Mixer High C/N 1st LO

- Built-in Roofing Filters
- 500kHz / 2.7kHz / 6kHz / 15kHz
- 7-inch Colour Display

- Roofing Frequency Sampling Band Scope
- Auto Scroll Mode
- Multi Information Screen
- 100W Heavy Duty Built-in Antenna Tuner

AVAILABLE NOW, SEE WWW.HAMRADIO.CO.UK/TS890S

KENWOOD TS-590SG



ML&S PRICE: £1369.95

KENWOOD TS-990S

200W HF/50MHz Base Station Transceiver with Dual TFT Display and Dual Receiver.



ML&S PRICE: £5549.95

KENWOOD TM-D710GE

FM Dual Band. Built-in GPS and APRS.



ML&S PRICE: £549.95

KENWOOD TH-D74E

Dual Band Handie with unique APRS, D-Star & HF SSB receive coverage.



ML&S PRICE: £549.95



ML&S: £3249.95

INCLUDING FREE MC-43 MIC

ML&S STOCK THE FULL RANGE OF NEW ICOM PRODUCTS

ICOM

Icom IC-7300

100 Watt - HF/50/70MHz TRANSCEIVER with SSB / CW / RTTY / AM / FM



High quality RF interface module allowing the Icom IC-7300 to have a pure RF signal output for connection to an external SDR receiver.

SEE WEB FOR OUR LATEST SPECIAL OFFER

PTRX-7300 Now available from stock. £189.95

The IC7300 sports HF+6m+4m coverage, it's 100W, houses an eye-catching touchscreen TFT display and includes an internal antenna tuner.



Icom IC-9700

Base Station 2/70/23 all mode including D-Star



These VHF/UHF All-Mode Direct Sampling transceivers sport the absolute latest technology.

AVAILABLE FOR IMMEDIATE SHIPPING.
EXCELLENT PART-EXCHANGE DEALS.

ID-52E D-Star 2/70 Handle

The ID-51Plus2, the new ID-52E has these exciting features

- Simultaneous reception in V/V, U/U, V/U as well as DV/DV
- Airband reception is expanded from VHF to UHF (225 to 374.995 MHz)
- Can be charged via a micro USB connector - Audio output has been increased from 400 mW to 750 mW
- The latest D-STAR functions allow you to send, receive and view saved photos on an installed microSD card using only the ID-52
- Accessories for the ID-51E, including battery packs and microphones, can be used

PRICE & AVAILABILITY TBA

Icom ID-5100

Latest 2/70 D-Star Touch Screen Transceiver from Icom. Bluetooth connectivity and second station control through an Android device.

ML&S PRICE: £574.95



ML&S Officially Appointed the UK Sole Distributor & Repair Workshop for JVC-Kenwood's Ham Radio Products

You can now order from ML&S for delivery on a Saturday or Sunday!
Order before 2pm as late as Friday of each week and see it delivered at the weekend.



Web purchases:
Just select Saturday or Sunday at the check-out.
Or call to place your order for Saturday or Sunday delivery on **0345 2300 599**



Roger Cooke G3LDI
roger@g3ldi.co.uk

The CWops activity periods are becoming supported even more here in the Norwich area. Some of this is due to the encouragement we provide for people to learn CW. That is evidenced in the amount of Morse Classes we provide in this area alone. We now have six classes promoted by the Norfolk ARC. The latest is on Friday evenings at 2000 local time on 145.250MHz and it is *Morse with Doctor Phil*. This is a class for raw beginners starting from scratch. **Phil G4LPP** has four students starting that way. Students then progress to other classes at ever increasing speed and complexity.

Once they reach a certain standard, they are encouraged to get on the air to do 'real-time' practice with normal QSOs. I don't mean those meaningless 599 73 type contacts, I mean conversational CW. It tests the nerves for the first few QSOs, but after a time they enjoy it and then make real progress by sticking with CW most of the time.

Two locals have done just this and now take part in the CWops CWT activity periods on a Wednesday. These are daunting enough because lots of the participants operate at speeds in excess of 25wpm, some even at 40+wpm. However, these two locals have persevered and now take part most weeks.

The reason for mentioning this is that the requirement for becoming a member of CWops has changed from being able to conduct conversational Morse at 25wpm to just taking part in these activity periods. Even though some of the participants take part using a reader, they are still keen enough to take part.


I am not too comfortable with this latest decision, but it was not mine to take. However, I don't nominate anybody using a reader. They have to prove that a simple exchange of a name and number is no real barrier to using that material between their ears before I will nominate.

That happens to be a personal opinion though, but in my opinion the ability to read everything without using a reader is an essential part of calling yourself a good CW operator.

Saying that, I do not mean that everybody has to be able to copy 40wpm in order to be called a good operator. I often listen to the Old Timer's net on 3525kHz in the mornings. The speed there is no greater than around 20wpm, but the operating and the Morse is extremely

CWops Rationale

Roger Cooke G3LDI talks about a change of policy at CWops before discussing other Morse-related topics.

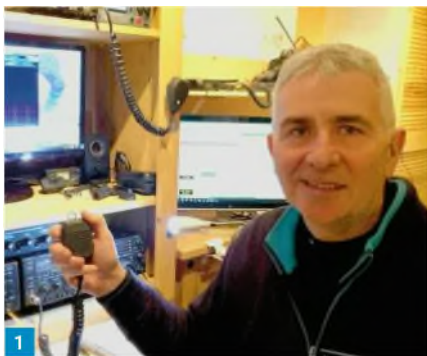

to a distant station. The series of on/off connections was governed by the Morse Code. It was primarily used between large towns and cities, and invariably by the railways of the time, to pass messages. As the system grew, and spread, around the various countries, it became the original internet. And so, with CWCOM we have come full circle, so to speak, as we can now use the modern version of the internet, to communicate around the world, using Morse Code.

"To this end, I have written a series of tutorials, about the setting up and configuration of the program, although there is an excellent 'help' page embedded in the program for quick reference.

"You can download CWCOM for free.

Download the installer from:

<https://archive.org/details/cwcom>

"Scroll down the page a bit, on the right-hand side is a small window: WINDOWS EXECUTABLE FILES

"Click on Windows Executable 2 files, and then choose 1.5 (latest & last version) or 1.47 (the earlier version)."

Two amateurs that have been helped by Gerry are **Martin 2WONKS** in Abergele (North Wales Amateur Radio Group) and **Ross M7RSS** in Exeter.

E-mail from a Reader

I received this interesting e-mail from Bob Barrett, who omitted to give his callsign: "Hi! I enjoyed reading the article in PW, recommending the learning of Morse Code. Seeing as we are now well into the 21st Century, old Sam Morse must have had some shrewd ideas more than 180 years ago!

"I am in my 82nd year and received my teaching from the RAF in 1964, prior to starting my aircrew career on the Shackleton aircraft. I am sure you must have many colleagues who have also been service trained.

"The manner of our training was based on the rhythms of the signals, starting with just four letters (if I remember correctly, P-W-F-Y). The second lesson another four letters with a short test on the eight letters covered to that date. With four more letters at a time, plus some recaps/review and

good. They are also 'good operators'. I guess it's horses for courses in that respect, but never frown on anybody sending at a slow speed, especially if the Morse is good.

CWCOM

If you aspire to become a good operator and live in a flat, or somewhere that forbids any antennas, live in a nursing home or similar, you must be really frustrated at not being able to get on the air and talk to friends, make new friends anywhere in the world, keep skeds and so on, in which case give this a try. It could be just what you are looking for.

I was sent this information by **Gerry**, who is not a licensed radio amateur but was a Royal Navy Wireless Telegraphist 1960 to 1972. Gerry lives in Portsmouth and only uses straight keys, and keys at about 23wpm with about 95% accuracy.

It is possible to use paddles, and keyers too. Gerry explains: "When Morse Code was first used, the operators used simple Morse keys, like an on/off switch, to send a current down a telegraph line

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk




3



4



5

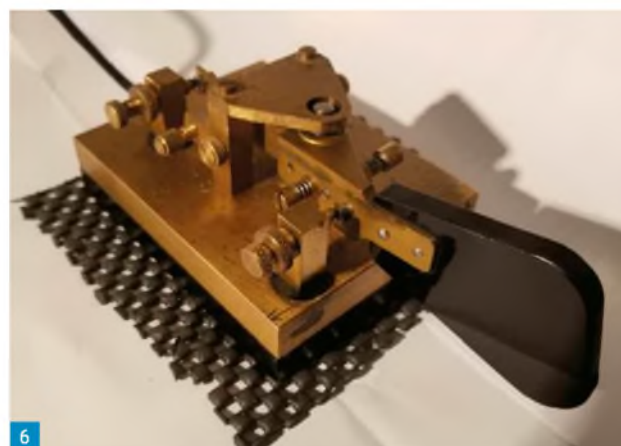

6

the progress tests, we worked our way through the alphabet. By then the speed had increased slightly and that was the next stage we worked upon.

We worked up to about 25wpm but 20wpm was generally an acceptable speed for a dark night in rough weather, at low level out over the Atlantic!

"I still keep up with the Code but due to illnesses over the last three years, I have been off the air for some time. I look forward to giving you a shout when I get back. Keep going, you are doing a grand job".

New Paddles and Keys

As CW operators, our paddles are a prized possession and something to be coveted. I guess it's a bit like the knight being proud of his sword!

Two local amateurs who have recently 'found' CW again and have become super-keen, have devised a weekly competition between themselves in order to improve their on-air skills. They still join our classes and are now taking part in the contests that Norfolk ARC take part in, such as the RSGB CC series and CWops.

John G4PFZ, Fig. 1, has mounted his straight key on a block of wood with a steel

base to give it weight and takes part in our SK nights on 80m. He has made a nice job of the key too, **Fig. 3**.

He let his enthusiasm run away with him, has bought a Begali Contour paddle, **Fig. 4**, and now has lots of QSOs every day using it. His ambition is to be at 25wpm and ragchew at that speed.

The other member of this duo is **Mike G4KQY, Fig. 2**. Mike uses a Chinese straight key, **Fig. 5**. Like John, he has mounted it on a wooden base and it looks very smart.

Various known as the D-117, the K4, or just the 'Chinese Army Key', these heavy-duty straight keys were made for the Chinese People's Liberation Army (PLA) in factories owned by the PLA, from the early 1960s to the present.

The Chinese phrase on the key's nameplate 'changshu dianxun qichai chang' translates as 'Changshu Telecommunication Equipment Factory', which was the last of several factories to make telegraphic equipment.

John and Mike are typical of amateurs who become really enthusiastic CW ops. Their keys become their swords and become prized possessions and we are all striving to own the holy grail of keys!

Fig. 1: John G4PFZ. Fig. 2: Mike G4KQY.

Fig. 3: John G4PFZ's straight key.

Fig. 4: G4PFZ's Begali Contour key.

Fig. 5: Mike G4KQY's straight key.

Fig. 6: G4KQY's paddle.

Mike's paddle is unknown but he would be interested in finding out its origin if anybody knows, **Fig. 6**.

It really is satisfying as a tutor to see how some ops are really taken with CW and it makes it all worthwhile.

As lots of us are in solitary confinement it would be great to see more take up CW, and more tutors take advantage of the GB2CW scheme of tuition on the air to a group from their club. It's easy to do, free, and well worth it because you can then tutor several in a class at the same time, something that the amateur licence does not normally allow as it is termed 'broadcasting'.

If you are interested in taking part, e-mail me at roger@g3ldi.co.uk and I can issue a letter of authorisation. The only prerequisite is that you must be an RSGB member. It is very rewarding and you will be helping promote CW.

73 and May the Morse be with you.
Roger G3LDI.

Read more radio news and reviews at www.radioenthusiast.co.uk/news

MOONRAKER

ONE STOP HOBBY RADIO SHOP

Moonraker UK Limited, Cranfield Road, Woburn Sands, Bucks MK17 8UR Open Monday-Friday 9:00-5:30pm

Sales line 01908 281705

E-mail sales@moonraker.eu

PayPal Visa Mastercard

Package (UK Mainland Only): Small items just £2.99
Medium items just £4.99 Maximum charge just £5.99

www.moonraker.eu

RM

Base 240v Mains

BLA1000 1.8-55MHz All mode solid state base amplifier, can deliver up to 1000 watts on all main amateur bands between 1.8 - 50MHz, has instant start-up, no setup necessary, and has some very useful features too, including SWR protection and twin antenna outputs **£2799.95**

BLA900 is a compact wideband 500W linear amplifier for the HF and 6m bands, from 1.8 to 54 MHz **£1999.99**

BLA350 PLUS is ideal base amplifier for the HF bands, the BLA 350 Plus mains powered Solid State amplifier gives a hefty 300 watts output and is simple to drive **£899.99**

Mobile 12v & 24V

HLA305V is a 12v wideband professional compact amplifier for the HF band covering 1.8-30 MHz Output is nominal 250W at full power, 6 band filter and LCD for Amplifier Status, Input drive from 1W to 10W maximum. Ideal for handhelds, FT-818ND and similar **£699.95**

HLA300V PLUS covers from 1.8-30 MHz, and with up to 300 watts on tap, gives you the edge working those weaker DX stations **£499.99**

HLA150V PLUS is an auto or manual microprocessor controlled band switching with 8 stage low pass filter on this solid state amplifier that will cover all the main Amateur Bands from 1.8-30MHz Suitable for all modes delivery 150W **£399.95**

KL703 is a new 500W linear Amplifier for use between 25 and 30 MHz, (developed for the 10m amateur radio band) **£399.95**

LA250V is a 12v professional 200W 140-150MHz amplifier, at 1 to 20W input (13.6V 30A). It uses 4 Mitsubishi RD70 Mosfets mounted on a copper heat spreader **£549.95**

HLA100 is a UHF wideband compact amplifier for the UHF band covering from 405 to 480 MHz Output is nominal 100W at full power **£479.99**

MAT-TUNER

MAT-40 is an outdoor weatherproof long wire and vertical wire tuner, 0.1-120 Watts, 1.8-54MHz **£259.99**

MAT-10 is a tuner designed for automatic "one touch" tuning use with Yaesu FT-817B1B transceivers via dedicated control cable (included with tuner purchase) 30W SSB, 1.8-54MHz **£229.99**

MAT-705 Specifically built for the new ICOM IC-705, the MAT-705 is the latest compact and fully portable Micro-ATU powered by an internal 9V dry battery! **£199.99**

MAT-125E is a general use external automatic antenna tuner for use with any HF transceiver. Automatic RF-sensed or manual tuning modes, 0.1-120 Watts, 1.8-54MHz **£179.99**

MAT-180H is an automatic antenna tuner designed for modern ICOM and Kenwood HF transceivers, 0.1-120 Watts, 1.8-54MHz **£159.95**

MAT-K100 180H is an automatic antenna tuner designed for modern Kenwood and ICOM HF transceivers, 0.1-120 Watts, 1.8-54MHz **£159.95**

ALL CONNECTING CABLES AVAILABLE £19.99

SHARMAN multiCOM

Sharman have been totally focused on sourcing and distributing radio communications and hobby products for dealers, distributors, and retailers throughout the UK, Ireland and Europe for many years. They produce a lovely range of power supplies to complement their range.

SM-50 is a high-power DC regulated Switch Mode power supply, providing up to 50A maximum current. Comes with over voltage, current limiting and short circuit protection **£139.99**

SM25-D is a high-power DC regulated switch mode power supply, providing up to 30A maximum current. Comes with over voltage, current limiting, short circuit and over temperature protection **SPECIAL OFFER £99.95**

SM-23 is a DC regulated switch mode power supply providing up to 23A maximum current. This power supply also has over voltage, current limiting and short circuit protection thus offers peace of mind to the user **SUPER SPECIAL OFFER £39.95**

SM-5 slim and compact switch mode power supply - It converts 240V AC to 12V DC and has special features such as high efficiency, reliability and light weight design. It also has Current Limiting and Short Circuit Protection **£39.95**

NEW IN

SUNSPOT MMDVM HOTSPOT

Sunspot MMDVM Hotspot gives you on the go digital modes when connected to WiFi or tethered to your phone.

Just £99.95

AVAIR

SWR Meters

Quality meters at affordable prices - from HF to UHF

AV-20 1.8-200 MHz 30/150W **£49.99**

AV-40 1.8-470 MHz 30/150W **£49.99**

AV-201 1.8-180 MHz 520/200/400/1000W **£59.99**

AV-400 140-525 MHz 520/200/400/1000W **£59.99**

AV-601 1.8-180/140-525 MHz 520/200/400/1000W **£79.99**

AV-1000 1.8-160/430-450/890-930/1240-1300MHz up to 400W **£89.99**

bhi

Bhi design and manufacture a range of DSP noise cancelling products that remove unwanted background noise and interference from noisy voice and radio communication channels to leave clear speech.

NEW IN

NES10-2 MK4 Noise Eliminating Speaker **£119.99**

The next evolution in BHI DSP speakers. This is one of the best DSP speakers on the market superb for elimination of unwanted noise on Ham Radio, Comms radio and scanner

DESKTOP **£179.95**

10 watt DSP noise cancelling base station speaker will work with most radios, transceivers, receivers, and SDR radios, giving a new listening experience. The new rotary controls make it very easy to use and set up to your own operating conditions.

DSPKR **£149.99**

This noise cancelling speaker incorporates unique DSP technology to remove unwanted background noise and interference from speech

DUAL IN-LINE **£179.99**

The Dual In-Line DSP noise eliminating module provides two channel/stereo noise cancellation, and is suitable for use on all radios and receivers including SDR, especially those with stereo or two channel output options.

COMPACT IN-LINE **£179.99**

This small compact battery operated handheld unit is ideal for portable use, and includes the latest bhi dual channel/stereo DSP noise cancelling technology. It's designed to be used with a pair of stereo headphones, but will also drive a mono loudspeaker or a pair of powered stereo speakers.

PARA PRO EQ20-DSP **£259.95**

The bhi Para Pro EQ20-DSP features a 20W modular audio power amplifier with a parametric equaliser plus the option of having bhi's latest dual Channel DSP Noise Cancelling technology and Bluetooth technology. The parametric equaliser allows any specific part of the frequency range to be selected and adjusted in strength enabling the user to shape the audio to suit their ears!

HP-1 Wired Stereo Headphones **JUST £19.95**

The HP-1 stereo headphones are suitable for general purpose use and can be used for radio communications as well as listening to music.

WATSON

Watson have been offering high quality shack accessories for many years and have gained a reputation for good quality products for the hobby enthusiast

Base Antennas

W-30 Dual Band 270cm 3.0/5.5dB Gain 1.3m N-Type fitting **£54.95**

W-50 Dual Band 270cm 4.5/7.2dB Gain 2.5m N-Type fitting **£64.99**

W-300 Dual Band 270cm 6.5/9.0dB Gain 3.1m N-Type fitting **£99.95**

W-2000 Tri Band 6/270cm 2.15/6.2/8.4dB Gain 2.5m N-Type fitting **£99.95**

Switches

CX-SW2PL 2 Way SO239 up to 2kW DC-1000MHz **£24.99**

CX-SW2M 2 Way N-Type up to 2kW DC-1000MHz **£41.95**

CX-SW3PL 3 Way SO239 up to 1.5kW DC-800MHz **£54.95**

CX-SW3M 3 Way N-Type up to 1.5kW DC-800MHz **£79.95**

CX-SW4PL 4 Way SO239 up to 1.5kW DC-900MHz **£99.95**

CX-SW4M 4 Way N-Type up to 1.5kW DC-900MHz **£79.99**

Dummy Loads

DM-150PL 30-150W DC-600MHz PL259 fitting **£44.99**

DM-200M 35-200W DC-1000MHz N-Type fitting **£64.99**

Arrow Antenna

The Arrow II line of Antennas has been engineered to provide maximum gain and efficiency in the smallest practical size & weight

116 WATTS

ARROW N 144/437-14NBP Portable satellite antenna (inc duplexer) 54" long **£199.99**

ARROW N 144/437-10NBP Portable satellite antenna (inc duplexer) 38" long **£149.99**

ARROW N 144/437-10NBP Portable satellite antenna (without duplexer) 38" long **£89.99**

ARROW N Roll up bag to suit all above antennas **£39.99**

ARROW GP121.5 1/4 Wave Ground Plane - (Aircraft Band) **£49.99**

ARROW GP70.250 1/4 Wave Ground plane (4 Metre) **£39.95**

ARROW GP52 1/4 Wave Ground Plane (6 Metres) **£64.99**

ARROW GP146 1/4 Wave Ground Plane (2 Metre) **£49.95**

ARROW GP146/440 1/4 Wave Ground Plane (Dual Band) **£59.95**

ARROW FHL UHF Fox Hunt Loop 1MHz-1000MHz **£79.99**

ARROW FHL VHF Fox Hunt Loop 1MHz-600MHz **£79.99**

ARROW 4 4MHz Offset Fox Hunt Antenna **£79.99**

DIAMOND ANTENNA

Yagis

1st class Japanese quality antennas with simple plug and play assembly

333 WATTS

A143057 Dual band 270cm, 7 ele, 7.5/9.3dB, 100W **£119.99**

A144510R 2m, 10 ele, 11.8dB, 100W **£79.99**

A14455R 2m, 5 ele, 9.1dB, 50W **£44.95**

A43015R 70cm, 15 ele, 14.8dB, 50W **£64.99**

A43010R 70cm, 10 ele, 13.1dB, 50W **£49.99**

A502HB 6m, 2 ele, 6.3dB, 130W **£79.99**

VHF/UHF Verticals

X-30 Dual Band 270cm 3.0/5.5dB Gain 1.3m SO239 fitting **£49.99**

X-30M Dual Band 270cm 3.0/5.5dB Gain 1.3m N-Type fitting **£49.99**

VX-30 Dual Band 270cm 2.15/5.5dB Gain 1.3m N-Type fitting (radial free) **£69.99**

X-50 Dual Band 270cm 4.5/7.2dB Gain 1.7m SO239 fitting **£64.99**

X-50M Dual Band 270cm 4.5/7.2dB Gain 1.7m N-Type fitting **£69.99**

X-200 Dual Band 270cm 6.0/8.0dB Gain 2.5m SO239 fitting **£99.95**

X-200M Dual Band 270cm 6.0/8.0dB Gain 2.5m N-Type fitting **£104.95**

X-300 Dual Band 270cm 6.5/9.0dB Gain 3.1m SO239 fitting **£99.99**

X-300M Dual Band 270cm 6.5/9.0dB Gain 3.1m N-Type fitting **£99.99**

X-510M Dual Band 270cm 8.3/11.7dB Gain 5.2m N-Type fitting **£129.99**

X-5000 Tri Band 270/23cm 4.5/8.3/11.7dB Gain 1.8m N-Type fitting **£149.99**

X-6000 Tri Band 270/23cm 6.5/9.0/10.0dB Gain 3.05m N-Type fitting **£179.99**

X-7000 Tri Band 270/23cm 8.3/11.7/13.7dB Gain 5.0m N-Type fitting **£199.99**

V-2000 Tri Band 6/270cm 2.15/6.2/8.4dB Gain 2.5m N-Type fitting **£119.95**

NEW IN

Professional factory fitted premium patch leads

High quality patch leads with all combinations factory fitted and available from stock All simply priced (search CS Premium on our website as many more not listed)

One Metre RG58 Options

CS Premium RG58 1M (PL259 to BNC Male) **£14.99**

CS Premium RG58 1M (PL259 to N-TYPE Male) **£14.99**

CS Premium RG58 1M (PL259 to SMA Male) **£14.99**

CS Premium RG58 1M (BNC Female to SMA Male) **£14.99**

CS Premium RG58 1M (BNC Male to N-TYPE Male) **£14.99**

CS Premium RG58 1M (N-TYPE Female to PL259) **£14.99**

CS Premium RG58 1M (N-TYPE Female to BNC Male) **£14.99**

Ten Metre RG58 Options

CS Premium RG58 10M (PL259 to PL259) **£19.99**

CS Premium RG58 10M (PL259 to BNC) **£19.99**

CS Premium RG58 10M (PL259 to N-TYPE Male) **£19.99**

CS Premium RG58 10M (PL259 to SMA Male) **£19.99**

CS Premium RG58 10M (N-TYPE Male to BNC Male) **£19.99**

CS Premium RG58 10M (PL259 to SMA Male) **£19.99**

CS Premium RG58 10M (N-TYPE Male to N-TYPE Male) **£19.99**

CS Premium RG58 10M (N-TYPE Male to BNC Male) **£19.99**

CS Premium RG58 10M (N-TYPE Female to BNC Male) **£19.99**

One Metre RG213 Options

CS Premium RG213 1M (BNC Male to BNC Male) **£19.99**

CS Premium RG213 1M (N-TYPE Male to N-TYPE Male) **£19.99**

CS Premium RG213 1M (BNC Male to N-TYPE Male) **£19.99**

CS Premium RG213 1M (PL259 to BNC Male) **£19.99**

CS Premium RG213 1M (PL259 to N-TYPE Male) **£19.99**

Ten Metre RG213 Options

CS Premium RG213 10M (N-TYPE Male to N-TYPE Male) **£29.99**

CS Premium RG213 10M (N-TYPE Male to BNC Male) **£29.99**

CS Premium RG213 10M (PL259 to BNC Male) **£29.99**

CS Premium RG213 10M (PL259 to N-TYPE Male) **£29.99**

MFJ Enterprises, founded in 1972 by Martin F. Jue, is a manufacturer of a broad range of products for the amateur radio market. They specialise in station accessories, such as antenna tuners and antenna switching equipment. MFJ now manufactures more amateur radio products than any other company in the world

MFJ

Automatic Tuners

MFJ-8268 remote Mobile ATU 1.6-30MHz 200W	£399.95
MFJ-8269 Compact with Random Wire Option 1.8-30MHz 200W	£329.95
MFJ-9918 1.8-30MHz 150W SSB/100W CW ATU	£299.95
MFJ-9938 1.8-30MHz 300W SSB/150W CW ATU	£389.95
MFJ-9948 1.8-30MHz 600W SSB/300W CW ATU	£449.99
MFJ-998 1.8-30MHz 1.5kW	£849.95

MFJ

Manual Tuners

We stock all the popular tuners to suit your needs and budget

MFJ-9028 3.5-30MHz 150W mini travel tuner	£139.95
MFJ-9018 1.8-30MHz 200W Versa tuner	£149.95
MFJ-945E 1.8-54MHz 300W tuner with meter	£179.95
MFJ-941E 1.8-30MHz 300W Versa tuner 2	£199.95
MFJ-949E 1.8-30MHz 300W deluxe Versa tuner with OL	£249.95
MFJ-9341E 1.8-30MHz 300W tuner complete with artificial GND	£249.95
MFJ-974B 3.6-54MHz 300W tuner with X-needle SWR/WATT	£249.95
MFJ-989 1.8-54MHz 300W all band tuner	£249.95
MFJ-9761E 1.8-30MHz 1500W balanced line tuner with X-needle SWR/WATT	£599.95

MFJ

Analysers

MFJ offer the best range of analysers the most popular being the MFJ-259C

MFJ-207 HF 10-160MHz 1.6-30MHz in 5 bands	£129.95
MFJ-208 VHF 138-150MHz + external jack for frequency counter	£119.95
MFJ-223 HF/AM 1.6-60MHz with colour graphic display	£399.95
MFJ-225 HF/VHF 1.8-170MHz, two ports, with graphic display	£399.95
MFJ-226 HF/VHF/VHF 1.2-230MHz, expect times analyser with graphic display	£449.99
MFJ-227 VHF/VHF 88-226-330-500MHz graphics WNA analyser	£449.95
MFJ-2480 HF/VHF/VHF 530kHz-230MHz with analogue meter	£379.95
MFJ-259C HF/VHF/VHF 530kHz-230MHz with analogue and LCD screen	£349.95
MFJ-2680 HF/VHF/VHF 530kHz-230/415-470MHz with analogue and LCD screen	£529.99
MFJ-268 PRO HF/VHF/VHF 530kHz-230/430-520MHz with analogue and LCD screen	£549.95

MFJ

SWR Meters

MFJ have every SWR/Wattmeter you could ever need including the world's largest with a 16cm+ screen

MFJ-889 HF 1.8-60MHz 20/200/2000W with massive 8.5 screen and fully automatic	£329.99
MFJ-888 HF+6m 1.8-54MHz 20/200/2000W with massive 8.5" screen	£249.95
MFJ-867 VHF/VHF 144/220/440MHz 20/200/400W with large screen	£219.95
MFJ-826B HF 1.8-54MHz 1500W digital SWR/Wattmeter built in frequency counter	£249.95
MFJ-828 HF 1.8-60MHz 1500W digital SWR/Wattmeter with 3" cross needle screen	£259.95
MFJ-884 Compact cross needle HF/VHF/VHF 1.8-80/144/430MHz 30/300W	£139.99
MFJ-882 Compact cross needle VHF/VHF 144/220/430MHz 30/300W	£84.95
MFJ-880 Compact cross needle HF 1.8-60MHz 30/300W	£69.95
MFJ-849 Digital HF/VHF 1.5-525MHz 200W with large 3.5" LCD display	£229.95

MFJ

Headphones

MFJ-393 professional grade MFJ Boom-Mic Head-phone set is for contesting, DXing and traffic nets. Comfort designed leatherette padding lets you operate for hours at the rig. Superb inch thick padding on each ear and headband. The MFJ-393 is so super lightweight, you won't even know you are wearing them. Available pre-wired for 100M, Kanwood, Yaesu	£79.99
MFJ-392B is perfect for amateur radio and shortwave listening. Great for all modes - SSB, FM, AM, data, and CW. Each earphone has an individual volume control. Superb padded headband and ear cushioned design makes listening extremely comfortable. High-performance driver unit reproduces enhanced communication sound. Signals never sounded so crystal clear	£44.99

MFJ

Dummy Loads

Choose between dry and oil filled dummy loads between 15-2500W

MFJ-261 15W (100W peak) DC-500MHz with PL259	£39.95
MFJ-261N 15W (100W peak) DC-500MHz with N-Type	£47.95
MFJ-262B 35W (200W peak) DC-1000MHz with PL259	£79.95
MFJ-262BN 35W (200W peak) DC-1000MHz with N-Type	£99.95
MFJ-260C 25W (300W peak) 30-650MHz with PL259	£59.95
MFJ-260CN 25W (300W peak) 30-650MHz with N-Type	£67.99
MFJ-230X 1kW (2kW peak) DC-400MHz with SO238 (need transformer oil)	£69.95
MFJ-250 1kW (2kW peak) DC-400MHz with SO239 (includes transformer oil)	£99.95
MFJ-264 100W (1.5kW peak) DC-650MHz with SO238	£69.95
MFJ-264N 100W (1.5kW peak) DC-650MHz with N-Type	£119.95
MFJ-251 25W (300W peak) DC-60MHz 16.6/25/50/100/150 Ohm selectable	£179.95

MFJ

Antenna Switches

MFJ Rhino antenna switches are tough and durable with gold plated flanges and connector contacts that provide low VSWR and low insertion loss. A rock-solid, sturdy, die-cast design gives up to an excellent 70 dB isolation.

These switches are built like a rhino, tough inside and out! A superior internal design lets them work for you for a long lifespan.

MFJ-2702 SO239 2-Way 0-1000MHz 2kW	£44.95
MFJ-2702N N-Type 2-Way 0-1000MHz 2kW	£64.95
MFJ-2703 SO239 3-Way 0-800MHz 2kW	£79.99
MFJ-2703N N-Type 3-Way 0-1.5GHz 2kW	£94.95
MFJ-2704 SO239 4-Way 0-900MHz 2kW	£119.95
MFJ-2704N N-Type 4-Way 0-1.5GHz 2kW	£129.95

MFJ

DC Multi-Outlet Strips

These strips have 5-way binding posts for your transceivers and accessories to keep your power connected neat and tidy and organized.

MFJ-1118 Deluxe Multiple DC Power outlet lets you power two HF and/or VHF transceivers and six or more accessories from your transceivers main 12VDC supply	£129.95
MFJ-1117 Multiple DC Power outlet lets you power four HF/VHF radios -- two at 35 Amps each and two at 35 Amps combined -- from your transceivers main 12VDC supply	£89.95
MFJ-1116 Multiple DC Power outlet handles 15 Amps total. It has eight pairs of heavy duty, RF bypassed 5-way binding posts that lets you power your accessories. They are protected by a master fuse and have an ON/OFF switch with "ON" LED indicator	£89.95
MFJ-1112 15 Amp Multiple DC Power outlet lets you power up to six devices from your transceivers main 12VDC supply	£54.95

MFJ

Morse Keys

Morse keys, readers and tutors starting from just £24.95.

MFJ-550 Budget practice key for beginners	£24.95
MFJ-553 Deluxe wood telegraph straight key	£37.99
MFJ-557 Compact code practice oscillator with volume adjust	£39.95
MFJ-566N Micro CW keyer black with metal base	£44.95
MFJ-566P Micro CW keyer black with plastic base	£34.99
MFJ-564 Deluxe Lambic paddle with heavy base in chrome	£134.99
MFJ-564B Deluxe Lambic paddle with heavy base in black	£129.95
MFJ-461 Pocket size Morse code reader	£129.95
MFJ-418 Pocket size Morse code tutor	£139.99

MFJ

Telescopic Antennas

Premium stainless steel telescopic whips are the perfect choice for building collapsible multi-band dipoles, mobiles, portable and base antennas. They are great for traveling, mini DXpeditions, vacations, etc.

MFJ-1979 17ft Ten section (27" to 16.9ft) 3/8th fitting	£79.95
MFJ-1977 12ft Seven section (24" to 12ft) 3/8th fitting	£64.95
MFJ-1976 10ft Seven sections (20" to 10ft) 3/8th fitting	£39.95

MFJ

HF Transmitting & Receiving Loop Antennas

Enjoy listening or transmitting on HF with these suborb loops. Ideal for limited space - apartments, motorhomes, adics, mobile homes or small gardens

MFJ-1782X 10-30M TX (no WARC bands) just 36" diameter	£479.95
MFJ-1786X 10-30M TX (no WARC bands) just 36" diameter, control box includes VSWR/PWR meter	£519.95
MFJ-1788X 15-40M TX just 36" diameter, control box includes VSWR/PWR meter	£549.99
MFJ-1886X 50 KHz-30 MHz RX super low noise receiving loop	£279.95
MFJ-1886TRX 50 KHz-30 MHz RX super low noise receiving loop with built-in transmit/receive switch	£339.95
MFJ-1888 50 KHz-34 MHz high performance loop with adjustable gain and multi-coupler remote control	£549.95

MFJ

Cobweb Antenna

Restricted space spoiling your operating fun? MFJ Cobweb puts your call back on the map!

This six-band (20, 17, 15, 12, 10, 6 Meters) full half-wave Cobweb Antenna is perfect for restricted space or portable operation. Sky-gray fiberglass spreaders and nearly invisible wire elements (1/4" dia x 1/2" feet square, 8 pounds), blend in with your surroundings while standing tough against nasty weather. Outstanding performance! Horizontally polarized for less local noise pickup plus solid gain over verticals will allow you to work DX easily -- even on QRP. Omni-directional. No radials needed! Works great at low heights. Low SWR is due to MFJ's exclusive Spider-Match™ broadband network

MFJ-1836 300W version	£349.95
MFJ-1836N 1500W version	£399.95

MFJ

Clocks

MFJ-1078 Mounted in a brushed aluminium frame, our 24 Hour LCD Clock features huge, easy-to-read 5/8 inch LCD numerals and a sloped face that makes it easy-to-read across the room	£17.99
MFJ-1088 Read both UTC and local time at a glance with our dual 12/24 hour LCD clock that displays 12/24 hour time simultaneously!	£31.99

MFJ

Patch Panel

These panel connect devices with virtually no loss, feed-thru or cross-talk. Provides 8 or 12 Teflon SO239 coax feed thru barrel connectors to patch 8 coax fed devices together with short coax jumpers. This extremely high performance and versatile military/professional patch panel approach has virtually no loss, no feed-thru and no cross-talk

MFJ-4704 4 position	£99.95
MFJ-4706 6 position	£109.99

MFJ

MFJ-2100

HF Octopus antenna base

Octopus antenna hub turns your ham-sticks into four fully balanced dipoles in minutes! Mix and match any four HF/VHF/UHF bands. Example: screw in 80,40,20 meter hamsticks and a dual band 2M/440 MHz whip (two on each band) on opposite sides. Now you have an automatic band switching 5-band dipole! Rotate it for maximum signal and minimum QRM and noise with a small rotator like Hy-gain AR-500. Works at any height, low for local NMS and high for DX. At a fixed height, (say 20-30 feet) use 80-Meters for NVIS and 20-Meters for low-angle Exomoon on any mast up to 1-inch in diameter. Use a fiberglass pole on a tripod and you are on the air! Check out our MFJ-1913EX a perfect mount for the new Octopus Antenna. Perfect for casual portable operation, limited space, HOAs, field day, camping, and APES. Single coax feed, built-in balun.....£139.95



MFJ-1234 RIGPI BASE
JUST £349.95

MENTION PRACTICAL WIRELESS AND GET FREE POSTAGE ON THIS ITEM

Join the best loyalty programme and start earning **WATTS now!**

All registered retail customers can now earn and redeem free product credits known as **WATTS**. It's simple the more you spend the more **WATTS** you receive. You will also receive bonus **WATTS** when you refer a 'New Customer', 'Write a Product Review', 'Share' a product' or 'Refer a Friend'

Don't miss out - Register now and start enjoying free **WATTS**

Steve Telenius-Lowe PJ4DX
teleniuslowe@gmail.com

Welcome to the December *HF Highlights*. Even though this is being written in mid-October, the Christmas movies have already begun to appear on the television, so perhaps it is not too early to wish all readers a very Happy Christmas!

With a new year coming along soon it is time to look forward to a new solar cycle too. Although we have been seeing sunspots from the new cycle for some months (see, for example, the March 2020 *HF Highlights* column), we are now officially at the start of Cycle 25, according to an interesting article from the USA's National Weather Service.

Entitled *Hello Solar Cycle 25*, the article states that the solar minimum between Cycles 24 and 25 occurred in December 2019 (see Fig. 1), "when the 13-month smoothed sunspot number fell to 1.8, according to the Solar Cycle 25 Prediction Panel, co-chaired by NOAA and NASA. We are now in Solar Cycle 25 with peak sunspot activity expected in 2025". The article went on to say that Cycle 24 was average in length at 11 years, but had the fourth-smallest intensity since records began in 1755 and was the weakest cycle for 100 years. The maximum occurred in April 2014 with sunspots peaking at 114, well below the average of 179.

The article continued: "Solar Cycle 24's progression was unusual. The Sun's Northern Hemisphere led the sunspot cycle, peaking over two years ahead of the Southern Hemisphere sunspot peak. This resulted in solar maximum having fewer sunspots than if the two hemispheres were in phase." This explains why Cycle 24, in common with many solar cycles, appeared to have two peaks rather than the one that might be expected.

Cycle 25 is forecast to be another weak one: the maximum is expected in July 2025 with a predicted peak of 115 sunspots. However, the good news is that the Solar Cycle 25 Prediction Panel has "high confidence" that the new cycle will break the trend of weakening solar activity seen over the past four cycles. Dr Lisa Upton, the panel co-chair and a solar physicist with Space Systems Research Corp, was quoted as saying: "We predict the decline in solar cycle amplitude, seen from cycles 21 through 24, has come to an end... There is no indication we are approaching a Maunder-type minimum in solar activity."

weather.gov/news/201509-solar-cycle

New Cycle Starting?

Steve Telenius-Lowe PJ4DX asks whether we are seeing the start of the next solar cycle and has news of the Bonaire 10/10/10 event.



As of the time of writing (October 11th) unfortunately there has not been as much activity as I had hoped due to a number of issues, including equipment failure, high local noise levels and in one case a move of house meaning no antenna was available. However, Bert PJ4KY and I have been active on SSB, Gerard PJ4GR has been on FT8, and all three of us have also operated using the special event call sign PJ4TEN, Fig. 2, which will continue to be active until the end of the month.

Readers' News

Reg Williams G000F wrote to "apologise for the lack of reports for PW *HF Highlights* over the last few months... As far as radio goes, I have not worked any contacts particularly inspiring on SSB or FT8 other than a few DX stations that pop up now and again... I will be looking forward to working PJ stations for the PJ4TEN Bonaire Island Award in October with hopefully more time on my hands." I'm pleased to report that Reg does appear to be more active again now as I worked him on 14MHz SSB on October 10th, the exact anniversary of 10/10/10.

Owen Williams G0PHY shows that even if you are not a dedicated contest operator you can still use contests to find and work the DX. He reported that "there was lots of activity this month with the Worked All Europe contest and the Scandinavian Activity Contest although conditions for the RSGB DX contest were disappointing with only one contact, namely PJ4DX (thanks also for the QSO in the WAE contest). In the RSGB contest I was only running 100 watts. Since the RSGB contest, conditions seem to have improved with 10m being open one day last week, S01WS in Western Sahara and ZD7FT both being audible. On 20m S79KW in the Seychelles has also been audible; he uses 100 watts to a loop antenna and he turned the power down to 10 watts during one QSO and was still audible with me. Conditions to the USA were also good during the month with contacts with stations in California, Washington state, Nevada and Alaska. The best DX in the month was on 40m during the Saturday evening of the Oceania phone contest when I managed to contact VK6NE

This latest report is in contrast to an earlier paper by five American and British scientists which concluded that Cycle 25 will be one of the best yet (see the September 2020 *HF Highlights*). It has to be said that this is a minority view, though, and the authors themselves admit their conclusion is "in stark contrast to the community consensus estimate of sunspot cycle 25 magnitude". We will know which of the two predictions is correct in only a few years' time. What everyone seems to agree on, though, is that HF propagation has now passed its current nadir and it should start to improve, although initially only gradually.

Bonaire 10/10/10 Event

October 10th marked the 10th anniversary of the dissolution of the country of the Netherlands Antilles when Bonaire, along with the islands of St Eustatius and Saba, integrated more closely with the Netherlands itself. At the same time, Bonaire became a new DXCC entity. To commemorate the 10th anniversary, Bonaire's amateurs are taking part in a month-long operating event (see the October *HF Highlights* column).

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Fig. 1: Solar minimum, as seen by the Solar Ultraviolet Imager aboard GOES-East in December 2019. (Photo credit: NOAA).

Fig. 2: QSL of special event station PJ4TEN, active during October.

Fig. 3: Members of the Riviera Amateur Radio Club in Torbay at the GB1BOB site.

Fig. 4: G3JNB's downsized, all-band, QRP CW station with the popular Yaesu FT-818, computer controlled by Ham Radio Deluxe and a Wolfwave processor.

Fig. 5: John King ZB2JK/MM live streaming on the Ham Radio Operator Facebook group.

Fig. 6: The DX Commander vertical on the sack trolley used by Ken EA5/G4VZY/M.

for a new band slot. I think I also worked 4U75UN [UN HQ in New York, celebrating the UN's 75th anniversary – Ed] for an all-time new one yesterday, although his online log has yet to be updated so fingers crossed on that one. I also bagged PJ4TEN yesterday [10/10/20 – Ed]... All contacts SSB with power between 100 and 400 watts (I turned the amplifier on for part of the WAE contest and also to work PJ4TEN) to a quarter-wave inverted-L on 7MHz and a dipole on 14MHz."

Etienne Vrebos OS8D/ON8DN in Brussels has had a problem with his Acom 1500 amplifier, bought new in February. It is probably the mains transformer that has broken down and the amplifier is back at the retailer for repair. Consequently, most of Etienne's QSOs this month were made with 'barefoot' power. He comments that he looked on 5MHz but could find no SSB activity. That is also my experience: we have had access to the band here in Bonaire for a few years now and although there were some CW and SSB signals on the band early on all I ever hear there now is FT8 activity.

Tony Usher G4HZW says that he "decided to try and disprove the saying that 'you can't teach an old dog new tricks' by purchasing a Kent Keys twin paddle Morse key. It's not easy to say the least! Perhaps the expression will be proved correct! I thought I'd buy British but I was surprised to see they appear to be made in Germany. In the meantime I continue with FT8/FT4 on 28MHz and 7MHz... 28MHz is open to EU most days and has been good to South America in the late afternoon and early evening on a number of occasions. On 7MHz, despite the ongoing noise problem, I worked VK a number of times, lots of east coast Ws plus Monaco and Kenya, new ones on 7MHz FT8."

Steph Foster G4XKH of the Riviera ARC in Torbay operated as GB1BOB in September in commemoration of Battle of Britain Day, **Fig. 3**. Steph wrote, "We were active on CW, phone, data and VHF/UHF FM. The club is



affiliated to the RAF Amateur Radio Society and I'm former RAF so it meant a lot to us."

"Conditions were atrocious for the first week of September" said **Victor Brand G3JNB** and it took him until the 7th to open his log with his 'regulars'. "FY5KE and OV1CDX were unusually weak but worked on 30m while a watery TZ4AM Mali, CQing on 40m, was simply not hearing many of his callers, including me! But later, on 20m, T6AA in Kabul and AA3B in PA both obliged. My annual SSB contact with PJ4DX was on 20m during the Worked All Europe contest. Conditions were so poor I had to attract his attention on CW!

"With no DXpeditions in prospect, it

seemed to me that working mostly the same DX stations every month (those regulars) was daft. Additionally, the inevitable strictures of age, suggested that my third and possibly final 'downsizing' should be brought forward. So, I stripped out the entire station, retired the FT-2000 and reinstalled my QRP FT-818 as the main rig, **Fig. 4**. Supported by the Ham Radio DeLuxe suite, it is computer controlled, operating from 'Top Band to Two' and feeding five antennas. Backup is my venerable Heathkit HW8. Testing completed, on the 19th I checked 20m and heard **Robert T6AA** in Kabul running a pile-up. Tentatively, I called three times and waited. He continued working the 'big guns' then

Read more radio news and reviews at www.radioenthusiast.co.uk/news



just stopped... until there was silence. The cacophony having ceased, I heard "G3JNB 599"! A confirmatory e-mail said 'I thought it was you, but weaker than usual!' Further QRP loggings include **Jeff TZ4AM** Mali, **VE2CSI** Sept-Isles [in rare Zone 2 – Ed] and **OH0/DL2SWW** Åland Islands.

"Meantime, following retirement and over the past 27 years of DXing (330 DXCC confirmed), it was pleasant to just indulge in a two-way QRP, 40m rag-chew with **Olaf DL4HG/P** and his K1. But, my 'contact of the month' was surely a 20-minute chat with **Martin VE2WU** in Quebec who reported that I was 'armchair copy!' Amazingly, PSK Reporter showed that, over on the West Coast, K7FE's long wire had copied my signals – 5191 miles! I do seem to be 'getting out more'. Funny that!"

Kevin Hewitt ZB2GI wrote that despite going up the Rock four times during September he did no HF operating from there. "I did some maintenance on the 10m wire, repaired the 5V DC/DC converter for the WSPR Flexi and received some SSTV images from the ISS. I also operated Maritime Mobile in the Bay of Gibraltar with **John King ZB2JK**, Fig. 5. John made three contacts on 20m and streamed to the Ham Radio Operator Live Stream Facebook group.

"National Day is celebrated in Gibraltar on the 10th September to commemorate the sovereignty referendum of 1967. I used the special prefix ZG2 from the 5th to the 10th to mark the occasion. The Gibraltar government cancelled all National Day events this year" [due to coronavirus].

Bill Ward 2E0BWX wrote with "Just a very short report from me this month. I've been quite busy at work so very little radio time

unfortunately." Bill's report is in 'Around the Bands': I believe this is the first time I have received a report from anyone using PSK31 since starting to compile the column in 2015!

Ken Churms EA5/G4VZV wrote about his pedestrian mobile activities from the salt lagoons of Santa Pola, 20km south of Alicante, Spain. Ken has been active with his two-wheel sack trolley station, Fig. 6, and says he has managed some radio time despite regional lockdowns due to Covid-19. In September Ken managed some excellent DX contacts into VK, ZL and the Pacific. From his CQ calls he managed **E51JD** (South Cook Islands) and **FK4RD** (New Caledonia). He spoke to **Yves FK4RD** on 40m using the full-size quarter-wave vertical wire on the DX Commander antenna attached to his trolley. **Jim E51JD** was worked on 20m with the shorter quarter-wave vertical, again attached to the trolley station. As winter time approaches Ken is hoping to work more from the Pacific via long path from his salt lagoon location.

Around the Bands

Owen G0PHY 7MHz SSB: 5B4AIF, N9NB, RM9I, UP0L, VK6NE. **14MHz SSB:** 4U75UN, 5B4AIF, A42K, AE7KI, D4Z, KL7SB, KW7Y, NO6T, NP4Z, PJ4A, PJ4DX, PJ4TEN, PT5J, RU9I, UP0L, VE2IM, VE5MX, W7WA.

Etienne OS8D/ON8DN: 7MHz SSB: HB0/OP2D. **14MHz SSB:** 9M63MJ, BY1CY, D4Z, JH4UTP, JQ1BVI, KL7SB, PJ4A, PZ5RA, S79VU, TO0Z, UN0LM, VR2XAN, YB0AR, YC9BHJ, ZA1E. **18MHz SSB:** E20WXA. **21MHz SSB:** 4L2M, FR4QT, OD50J. **28MHz SSB:** S01WS.

Tony G4HZW: 7MHz FT8: 3A/IW1RBI,

5Z4VJ, 8P4JB, AA2PQ, C31LK, C08VWZ, HI8RMQ, KC1HXR, LU5DF, VK2WJ, VK3FCBR, W3L, WP4EJH. **7MHz FT4:** 4Z5ML, AB8JL, HI8RD, K1DJE, K2CYS, KD4JS, KP4DVM, N3YEA, VA3TIC. **28MHz FT8:** C31RP, CX2AQ, LU1DG, LU5FF, LU6HR, PP5JR, PT2VHF, PU7KRK, PY3JFS, PY5XD, ZD7MY.

Kevin ZB2GI: 14MHz SSB: 9Z4AH. **14MHz FT8:** ACSAV, AK0MR, CU3AT, HF90TPCG (90yrs PZK), K6EI, K7KB, KA9FOX, KV4GA, N2PC, N3SL, VE3HLM, VE7NZ. **18MHz FT8:** 2U0WZY, 9K2DB, EA8KH, EA9BO, K0RS, TF1A, W6IZT. **28MHz FT8:** WP4SD.

Kevin also operated as **ZG2GI:** 5MHz FT8: PA9CC. **7MHz FT8:** EA6SA, EA8W, TK5IH. **10MHz FT8:** 9H1SR, K1KA, KD5M, N4AWP, VA2PM, WE2X. **14MHz SSB:** 9Z4FE, AL7AF, K1DSK, K2AR, K4CNF, K7ZZX, KD3TB, KP4M, KP4S, N9CQB, PY6HD, V01CH, W5SV. **14MHz FT8:** 4X4MF, DQ100SL (100yr Versailles Treaty), EA8ZG, J69DS, K4EA, SX300ML (2500yrs Battle of Thermopylae). **18MHz FT8:** 4X4MF, CU3AC, EA8MU, K0DEQ, K3LA, K4CIA, K6ZH, K9MK, KC0V, KD5M, NP3XF, TA0S, W1OP, W5AP, WB2QJ, VE3XN. **21MHz FT8:** HB9MFL.

Bill 2E0BWX: 7MHz FT8: DM1AD, F5AOW, IU1DXU, PD0WAG. **14MHz FT8:** EA9ACD, RK4FF. **14MHz PSK31:** HA8LD. **18MHz FT8:** RN3DEY, UX7QV.

Signing Off

Thank you to all contributors. Please send all input for this column to teleniuslowe@gmail.com by 11th of each month. Photographs would be particularly welcome! For the February issue the deadline is December 11th. 73, Steve PJ4DX.

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Part One: Radio People

Q1. What is the occupation of the holder of the callsign VU2AMY?

Q2. The most popular mode of 2020 has been FT8. It was developed by **Joe Taylor K1JT** and who else (name and callsign)?

Q3. WB6ACU is better known to non-radio amateurs as – who?

Q4. A well-known radio amateur once stood as the Republican candidate in a US Presidential election. Who was he, and what was his amateur radio callsign?

Q5. **Karl Ferdinand Braun, Fig. 1**, won the Nobel Prize for physics, but with whom did he share the prize?

Q6. What is the amateur radio connection of the son of **Sir Hiram Maxim**, who famously invented the Maxim machine gun?

Q7. The dB is named in honour of which distinguished scientist and engineer?

Q8. The Hollywood movie star **Hedy Lamarr, Fig. 2**, contributed towards the invention of a 'Secret Communication System'. What was it?

Q9. **Sean GOOAN** had a successful career in a punk band and as a solo artist. He is known to the general public by his middle name. Who is he?

Q10. Who started the Islands On The Air (IOTA) programme in 1964?

Part Two: General

Q11. The *Titanic, Fig. 3*, used what callsign?

Q12. Which companies made the following pairs of vintage HF amateur radio equipment (1 point for each company)?
(a) 30L-1 and KWM-2, (b) Vanguard and Viceroy, (c) T-4XC and R-4C, (d) DX-100 and HW-101, (e) AT5 and T28?

Q13. Which country's radio amateurs are represented by the following national societies? (1 point for each):
(a) WIA, (b) ARABH, (c) USKA, (d) UBA, (e) LABRE.


Q14. What do these frequencies have in common – 14,100, 18,110, 21,150, 24,930, 28,200kHz?

Practical Wireless Christmas Quiz

This year's Christmas Quiz is in two parts: firstly radio people, and some general radio questions in Part Two. There are no prizes.



1



2



3

Q15. What do the initials 'APRS' actually stand for?

Q16. Approximately how many QSOs had been uploaded to 'Club Log' (**Fig. 4**) by October 2020: (a) 68,000, (b) 680,000, (c) 6,800,000, (d) 68,000,000 or (e) 680,000,000?

Q17. Within amateur radio, what do Sydney (Australia), New York, Helsinki, Montreal, Kiruna (Sweden), Wellington (New Zealand) and Kaliningrad all have in common?

Q18. In which month do the following operating events take place? (1 point for each):
(a) The International Lighthouse / Lightship Weekend (ILLW); (b) International Marconi Day; (c) Jamboree On The Air (JOTA); (d) VHF National Field Day (VHF NFD); (e) CQ World Wide DX Phone Contest.

Q19. What is the approximate height, in kilometres, of (a) the D-layer, (b) the E-layer, (c) the F1/F2 layers? (1 point for each)

Q20. What callsigns should be used by the following amateurs, if: (a) M7XYZ moved from London to Glasgow?
(b) if SM6XYZ moved from Gothenburg to Stockholm? and
(c) if W2XYZ moved from New York to San Francisco? (1 point for each)



4

Fig. 1: With whom did this man share the Nobel Prize for physics? **Fig. 2:** Hedy Lamarr (Photo: The Heavenly Body, 1944, Wikipedia)
Fig. 3: What was the Titanic's radio callsign?

The answers can be found on page 64



Read more radio news and reviews at www.radioenthusiast.co.uk/news

Barbara Mary Dunn G6YL: An Amateur Radio Trailblazer

Scott A. Caldwell

practicalwireless@warnersgroup.co.uk

Barbara Mary Dunn (1896 to 1979) is quoted as saying that "I don't like phones". Just as well she was fascinated by wireless communications from an incredibly early age. She later recalled her first experience of the magic of wireless telegraphy communications:

"The first time I heard and sent Morse code was when I was about ten years old, at boarding school. I remember a man in a wheelchair talking about wireless and giving demonstrations on the stage of our concert hall. At the end of his lecture, he asked if any young lady in the audience would like to step up on the stage and stand between his aerial and his receiver, and see whether she could prevent the Morse signals passing over from one side of the stage to the other! Of course, I volunteered! The man keyed SOS and he let me do the same. I was thrilled".

She successfully obtained her licence on April 14th 1927 (Table 1) and then took to the airwaves for the first time on November 21st 1927. It is claimed that she became the first female amateur radio operator in the United Kingdom (UK) and Europe and opened the door to the hobby for female operators throughout the world. The aftermath of the First World War (1914 – 1918) was a catalyst for social change and female suffrage. However, there is evidence to suggest that Dunn was in fact not the first female amateur radio operator in the UK. It is suggested that B. Saltmarsh 6SF of Sandridge obtained her licence in 1926, and she never admitted to being a young female operator until approximately seven years later when her logbook entries were subsequently changed to Miss B. Saltmarsh. A literature search reveals some interesting results. The December 1927 edition of *The Wireless Engineer* contains an article by B. Saltmarsh 6SF entitled "A Radio Signal Intensity Recorder" and details the purpose of making a direct record of the intensity, or strength of an incoming radio signal and consequently of showing variations in such intensity. It is also interesting to note that Jane Dicks, call-sign G6JN, also became licensed in 1927. However, it is claimed that her licence expired after only two years of operation.

Scott Caldwell asks, "Who was the United Kingdom's First Female Amateur Radio Operator?"

An Interest Sparked

Dunn's interest in wireless communication was enhanced in 1923, when her father bought a receiver that had five general purpose valves standing up in a row on top of a wooden cabinet. She was put in charge of the family radio and they enjoyed listening to the newly established British Broadcasting Corporation's (BBC) transmissions from 2LO in London on 350m (857kHz). However, the broadcasts were often subjected to bad levels of interference of a rasping nature. She tried repeatedly to tune the QRM out. She decided to try and investigate the source of the interference. This was the catalyst for her to learn Morse code and her prolonged periods sat in front of the family radio, where she concentrated and copied down the dots and dashes as fast as possible.

Her parents supported her passion for wireless and allowed her to drill holes through the window frames to accommodate the lead-in wires from various outdoor antennas. After leaving school she had many interests and hobbies in addition to amateur radio: outdoor tennis, shooting, bird watching, motor driving, piano and organ playing, and embossing books into Braille for the National Library for the Blind. John R. "Reg" Witty was her half-brother. They shared the same father. Reg built much of her equipment. They remained close throughout their lives and kept in contact over the airwaves, while he sailed around the world. Reg went silent key in 1975.

One of her greatest achievements was when she received her first SOS message with the crucial Latitude and Longitude coordinates. Her father was initially skeptical and confirmed the information with Lloyds of London, the next day. He returned quite satisfied and extremely impressed at her wireless and Morse code ability.

At her Morse code examination, the examiner gave her a column from the London Times newspaper to send. He soon interrupted and instructed her to stop sending as she was including brackets, colons, and semi-colons. He then politely

Operator	Call sign	Year Licensed
B. Saltmarsh	6SF	1926
Barbara Mary Dunn	G6YL	1927
Jane Dicks	G6JN	1927
Nell Corry	G2YL	1932
Constance Hall	G8YL	1936

Table 1: The Pioneering Female Amateur Radio Operators.

informed her that amateurs never used them in their communications. The pace of the examination soon increased from 12 to 25 words per minute. He eventually informed her that she had passed with flying colours and she was in fact far better than the vast majority of her contemporary male operators.

Early Operations

When she was first licensed, Dunn operated from her home address at Lilystone Hall, Stock (Essex) where she regularly operated on both the 45 and 23m wavelengths. She was able to indulge in her amateur radio passion as her family was financially secure due to their investments in the railway industry. She subsequently did not need to work, and this also allowed her to devote more time to the demands of the hobby. She even had the relative luxury of a housemaid and chauffeur who handled the domestic chores, allowing even more time for her interests. She never married and seemed quite content to live by her own, against the social norms of the time, when society expected a woman to be a wife and mother first.

Her first contact was made on November 21st 1927, with G16YW who operated from Ireland. She always valued this QSL as the most important one. Her next QSOs were with G6NX (Scotland) and G2ZC (Jersey, Channel Islands). Her first QSO with the USA occurred on April 12th 1928, when she worked with NU1ASY.

In 1928, she moved to Acton House, Felton in the county of Northumberland. Acton House is located in picturesque surroundings, on a hillside that slopes down

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk



Fig. 1: A QSL Card from G6YL 1934 (Public Domain/ Pinterest) Fig. 2: Voluntary Interceptor Meeting (Barbara Dunn is Standing, and Nell Corry is Sat Down - Front Row) (RSGB)

to the River Cuquet and the North Sea. Visitors to Acton House often remarked on her antenna that was suspended between a 30ft pole, attached to the robust structure of an oak tree, and a chimney. This ultimately formed the structure of a slightly bent 60ft support, with the antenna at an average height of 40ft. This antenna configuration provided Dunn with exceptional DX results.

In 1930, she visited Sweden and during the railway journey from Stockholm to Goteborg, she kept receiving bouquets of flowers from her admiring fellow radio amateurs, every time the train stopped at a station. She also recalled many amusing experiences when she conversed with foreign stations. Shortly, after she started operating on 45m, she was working with a Polish station who had limited command of English. When they were exchanging addresses for QSL confirmation, he translated her name as the "S.S.B. Dunn" and he wished to know her next port of call.

Dunn's Equipment

Her original transmitter employed an LS5 in a Hartley circuit, with about 350V derived from a Mortley rotary converter running off a 6V car accumulator (no electrical mains), feeding a half-wave Hertz antenna. Some idea of the enthusiasm of those days may be gained when it is realised that the accumulator supplied current for the generator, LS5, and the two bright emitters in the receiver, and had to be taken six miles to be fully charged. However, with the aid of a spare battery, this equipment did very good work on 45m with an input of 6 to 10W on CW only.

Cultural Changes

In the 1930s female operators rarely attended the local Provincial District Meetings of "The Society" that would later become "The Radio Society of Great Britain". Her personal-

ity had been described as quiet and retiring, and her attendance at the 1930 Convention took considerable persuasion from Gerry Marcuse (G2NM, RSGB President 1929 - 1930). Her presence at the Convention dinner caused a sensation, especially during the awards ceremony when she became the first female to be awarded a society trophy. She won the RSGB Top Band Contest silver cup in the SWL classification.

In July 1939, Dunn achieved yet another radio first, when she utilised a long lines transmitter (a self-oscillator with long lines at 5m). It was while scanning on her 56MHz receivers that she became the first to hear the hissing sound from a solar burst on this band. The start of hostilities in September 1939 left Dunn feeling extremely disappointed as she was only four countries short of achieving a DXCC (DX Century Club), amateur radio's premier award.

G6YL and the Voluntary Interceptors

M15 approached RSGB President, Arthur Watts G6UN, who through the membership network handpicked and recruited radio amateurs with exceptional Morse abilities.

Dunn answered the nation's call and assisted in the war effort (1939 - 1945). She and approximately 1500 radio amateurs were recruited as Voluntary Interceptors (VIs) in the clandestine Radio Secret Service. They were instructed to intercept German military transmissions. Details of her war-time service were not made public until 1979 when the BBC produced a television series called "Secret Listeners", presented by Rene Cutforth.

Records that identified the VIs were destroyed at the end of the war and it was assumed that their roles would remain forever a secret. Author, Geoffrey Pidgeon (The Secret Wireless War, The Story of M16 Communications 1939 - 1945) concluded

"that the VIs, involved the greatest gathering of amateur radio talent ever in a single endeavour".

The VI role was vital to the successful prosecution of Britain's war effort as they discovered and monitored the encrypted communications network of the Abwehr, the German Secret Intelligence Service. The intercepted messages were copied onto log sheets and forward to a PO Box with a Barnet address, where they were sorted and forwarded to Bletchley Park for final decryption. T & R Bulletins for 1939 and 1940 under "Khaki and Blue" refer to Dunn but there was no disclosure on the vital war work undertaken by her and fellow radio amateurs.

The Old Old Timers Club

The Old Old Timers Club (OOTC) was established in 1947, by the pioneering amateurs who had defined the very concepts of the hobby. The requirement for membership was a two-way communication by wireless, 40 years or more before 1947. Dunn was member number 910.

In later years, Dunn became more outspoken on topical and controversial issues that impacted on the amateur radio hobby. An extract from a letter written in 1973 over the dominance of competitions on the bands reflects this viewpoint:

"Having read the letter of W2OHF in QST of February, under the heading Contest Quandary. I have checked the latest list of contest dates in 1973 and find that between February 17 and November 11 there are only three weekends free from contests (excluding the SS contests). Several weekends

Continued on page 50

Mike Richards G4WNC
practicalwireless@warnersgroup.co.uk

This month I'm continuing my introduction to FT8 with a selection of operating tips to help you get the most from the mode.

FT8 Operating Tips


USB or LSB?: Those new to data modes are often confused as to whether or not they should follow the SSB convention and use LSB for transmissions on 7MHz and below. This convention is often built into the firmware of your rig so can happen inadvertently. The correct setting for all bands is USB. Data modes operators use USB because we are sending audio tones, AFSK (Audio Frequency Shift Keying), to emulate true FSK (Frequency Shift Keying). In this system, a 1kHz audio tone will raise the carrier frequency by 1kHz and a 2kHz tone will raise it by 2kHz, **Fig. 1A**. If we were to use LSB, the 1kHz tone would lower the carrier by 1kHz and the 2kHz tone would lower it by a further 1kHz to 2kHz, **Fig. 1B**. While this still produces an FSK-like signal, the shift would be inverted, thus making it unreadable. Remember, you should always use USB for data modes, regardless of the operating band.

RTTY and USB/LSB: While you should generally use USB for all data modes, there are dual standards in operation for RTTY. North American operators normally use LSB while USB is often used in Europe. This situation is exacerbated because some data modes software assumes you will be using LSB. For this reason every RTTY program has a Reverse button that's used to correct inverted tones. If you're using FLDIGI, then you should use USB. For other software packages, check the user guide and select the appropriate sideband.

Audio Drive: While we are all aware of the splatter problems associated with overdriving an SSB transmitter, the use of software generated audio signals introduces an, often neglected, link in the chain. While digital audio systems produce excellent fidelity, they are unforgiving and produce hard clipping and severe distortion products when overdriven. This distortion can pass to the SSB modulator and have a disastrous effect on your signal. You will not be popular! Once aware of the issue, it is easy to control. For those of you with recent transceivers using a USB link for the soundcard and CAT, life is much easier because the audio remains in the digital domain. In this case you should start by configuring your rig for the desired output power.

More on FT8

Mike Richards G4WNC continues with his primer on operating FT8.

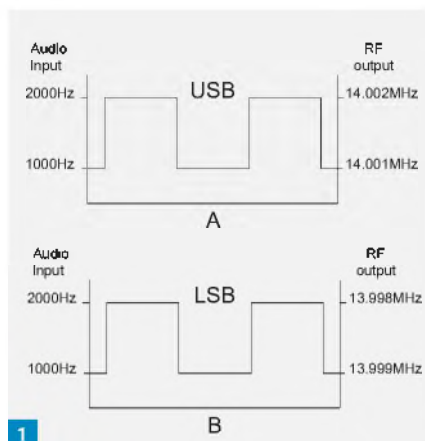

As FT8 is a weak signal mode, you should always use the minimum power required to support the link and I generally start at 5 watts. Once you have configured your rig, connect a dummy load and click the Tune button in WSJT-X. This will put the rig into transmit and send an audio tone to the transmitter. You can adjust the audio tone level using the Power slider at the bottom right of the WSJT-X main screen, **Fig. 2**. I aim to run the Power slider at around 75%. If all is well, you should see your transmit power change as you move the WSJT-X Power slider. If the output power doesn't change, you are probably overdriving the audio and need to investigate. Those with older rigs that are feeding the audio from WSJT-X to the Mic or accessory input of the rig need to watch the rig's mic or data gain setting. With the tune button activated, set the WSJT-X Power slider to about 75% and adjust the rig's Mic or Data gain controls for the desired output power. When complete, make sure you can control the output power with the WSJT-X Power slider. If the transmit power stops rising as you increase the WSJT-X Power slider, that's an indicator that some part of the chain is limiting and you should back-off slightly.

Once you're confident that you have the drive levels under control, you can move on to set the optimum drive level for each band. This is often required because many rigs need different drive levels to achieve a given output power across the bands. WSJT-X can help with this by remembering the drive level for each band. Leave your

dummy load connected and do the following:

In the File menu choose: Settings - Audio
Ensure that 'Remember power settings by band - Transmit' is ticked.

Click OK

For each of the bands you intend to use, do the following:

Retune to the desired band

Click the CQ message and Enable TX

During the transmit cycles, adjust the Power slider for the desired output

Choosing the transmit power: As FT8 is a specialist weak signal mode you can generally operate with low powers in the region of 5 watts. However, you can use the received signal reports to trim the transmit power. Most expert users suggest adjusting the RF power so that your received signal strength is between 0 and -10dB. As WSJT-X measures your signal-to-noise ratio at the far end, these signal reports are far more useful than the manually reported 599 results given in some other modes.

Signal monitoring: The availability of so many cheap SDRs means that it is easy to build your own off-air signal monitor to check the quality of your transmitted signal. In most cases, you will only need a very small whip antenna of just a few inches to gather sufficient signal. Another technique, for those fortunate enough to have a digital scope, is to take a tap off the transmit line and feed it to a scope in spectrum analyser mode. For my setup I use a home-made 40dB RF tap that feeds a sample of my signal into a PicoScope 3203D 50MHz scope in spectrum analyser mode, **Fig. 3**. That way I can see a 50MHz wide spectrum and directly measure the harmonic distortion of my signal.

Split Frequency Operation: Most newcomers to FT8 operate using the default settings and these are a great way to get started. In its default state, you select a station to call by double-clicking on the desired callsign. This sets both your transmit and receive frequencies to those of the called station, just as you would for a normal SSB QSO. However, when you do that, your transmit signal is directly competing with any other stations that are calling. This is fine if the bands are quiet or you have a booming

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Fig. 1: Shows the RF output from audio tones when a 14MHz SSB rig is set to USB (A) and LSB (B). **Fig. 2:** The WSJT-X power slider that controls the audio to the transmitter. **Fig. 3:** My signal quality monitoring setup with a PicoScope. **Fig. 4:** WSJT-X receive panel with two callers responding to my CQ. **Fig. 5:** WSJT-X WideGraph set to display the receiver passband. **Fig. 6:** WSJT-X waterfall control sliders.

signal, but not so good if you're running a QRP station. As WSJT-X can simultaneously receive all signals in the receive passband, we can use split frequency operation and transmit on a clear channel. Not only does that improve our chances of being received, but it helps the called station because WSJT-X will display a list of all the calling stations, **Fig. 4**. That station can then stay on air until everyone has been contacted. Finding and setting separate transmit and receive frequencies is done using the Wide graph display and there are a few things we need to configure to get the best from this helpful display.

There are two sections to the Wide Graph. At the top is a waterfall display that is useful for showing band occupancy, while the bottom section is a spectrum display that gives a better view of the signal levels. The first task is to set the display to match the passband of your transceiver. We can use the spectrum display to measure that passband. Begin by doing the following:

- Set your transceiver to the mode you will be using with WSJT-X
- Set Bins/Pixel to 4
- Start to 0Hz
- N Avg to 3
- Palette to Default
- Adjust the two lower sliders for a display similar to **Fig. 5**

Using the spectrum display, you should be able to clearly see the passband of your receiver, **Fig. 5**. The next step is to match the display to your passband as follows:




Adjust the Start frequency to the lower edge of your passband, typically around 300Hz.

Resize the Wide-Graph window to the width that works best for your screen size.



Adjust the Bins/Pixel so that the top-end of your receiver passband fits within the re-sized Wide Graph window.

That's it!

Those of you with SDR receivers will generally be able to set a wider passband. Now that you have the Wide-Graph passband configured, you can move up to the waterfall as that's what we'll be using to run split frequencies. The first task here is to trim

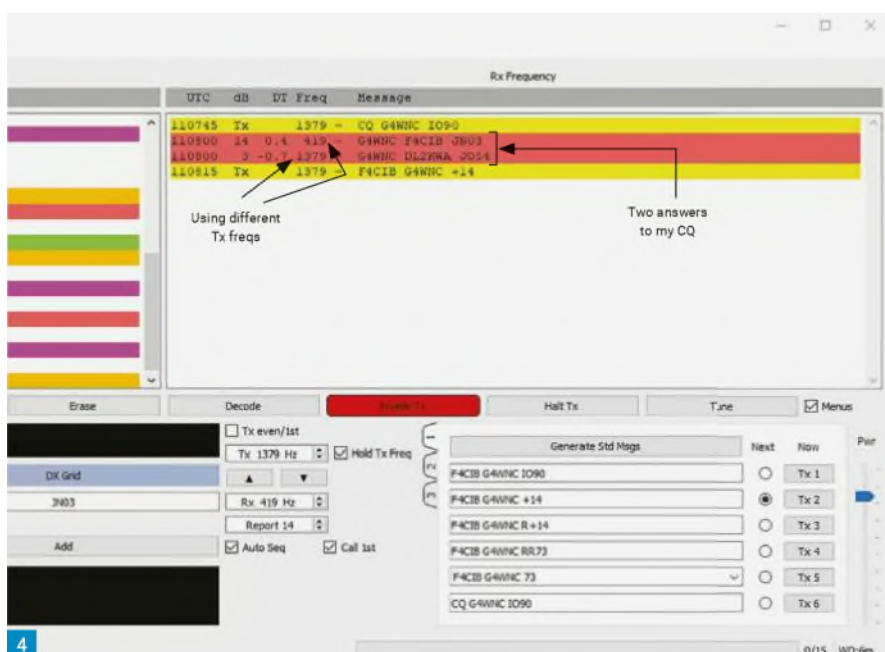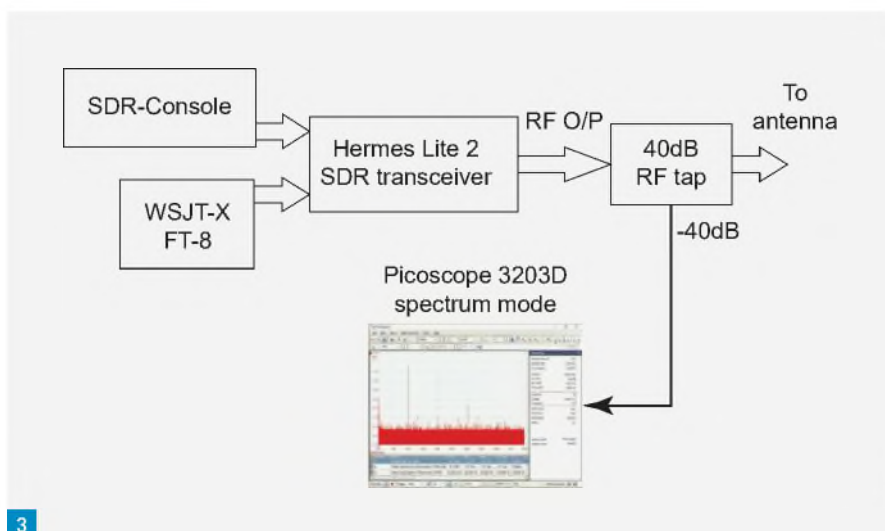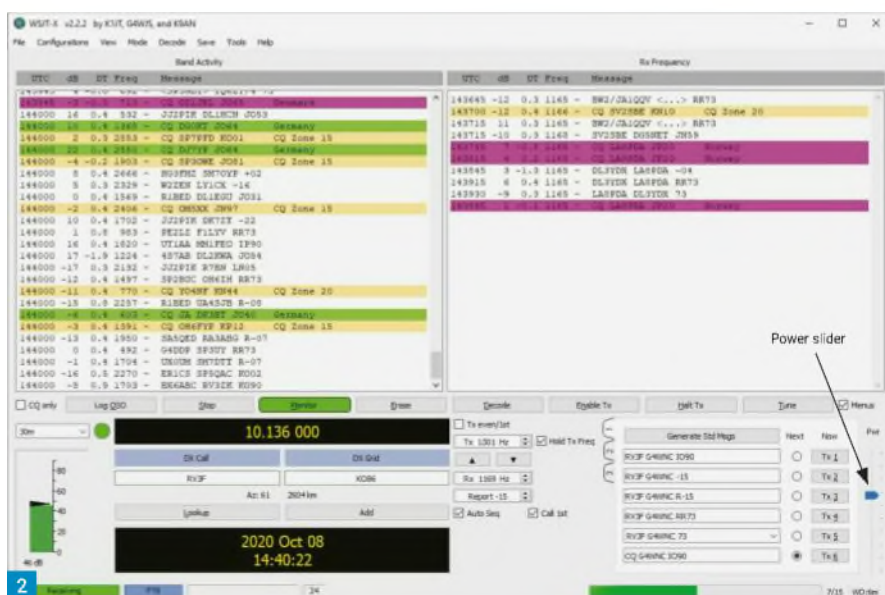

Read more radio news and reviews at www.radioenthusiast.co.uk/news

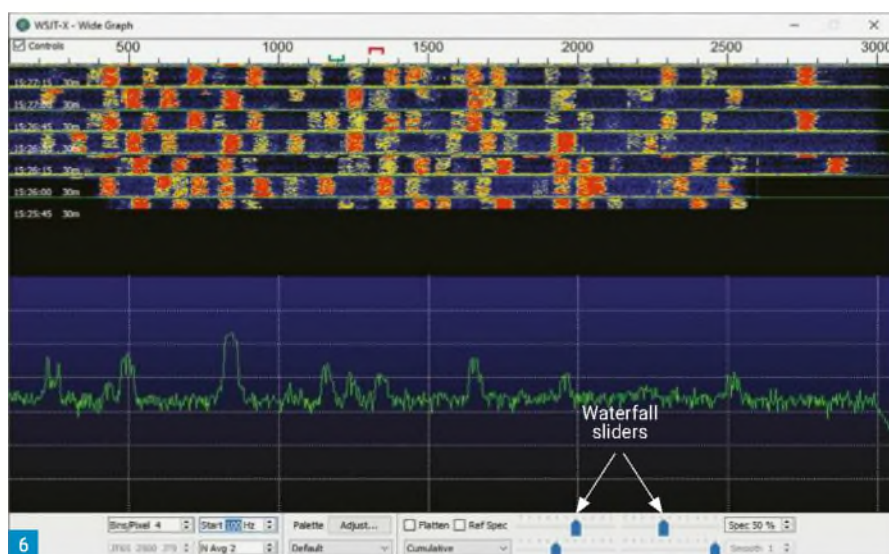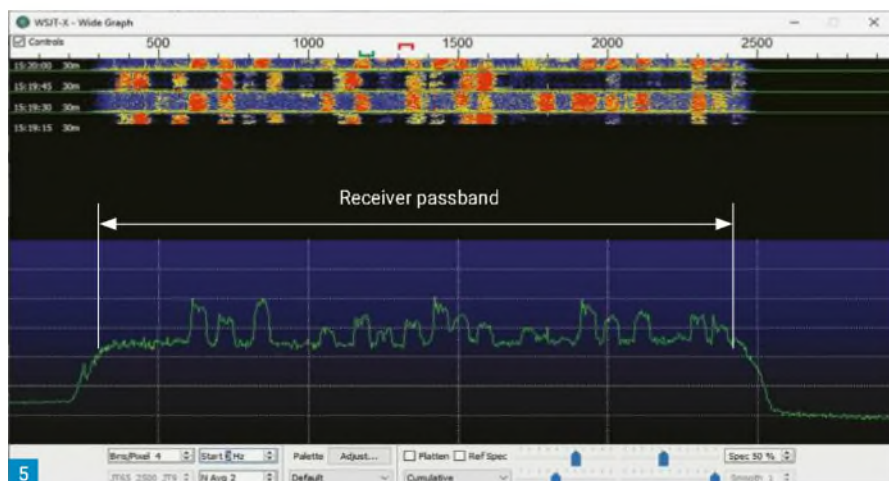

the two waterfall sliders, Fig. 6, to give the clearest display. With the Wide Graph optimised you can start using it for split-frequency operation.

The first task is to return to the WSJT-X main window and ensure Hold Tx Freq is ticked. When this is ticked the transmit frequency will remain wherever you place it. On the Wide Graph you need to observe a few 15 second FT8 cycles to spot an empty or lightly used channel. When you find that channel, press and hold the Shift key while clicking with the mouse on the left-hand edge of the slot you have chosen. You will see the red square bracket symbol appear on top of the slot. That shows your transmit frequency. There's no need to set the receive frequency because that will be determined by the station you want to work. You can now put out a CQ call by enabling Tx and clicking message 6 to start calling CQ in the next available timeslot. If you don't have any success, try moving your Tx frequency as there may be QRM on that frequency at the distant end.

Managing your CQ calls: For those new to FT8, trying to scan the list of received stations and to choose which station to work can be just too confusing. To solve that problem, the Call 1st option was introduced. When ticked, Call 1st will automatically select and start an automated QSO to the first operator to respond to your CQ call.

Working multiple stations after a CQ call: This is very easy to do. All that's required is to reselect Enable Tx at the end of each QSO and WSJT-X will automatically pick up anyone who is still calling you.

Errata: In Fig. 3 of my August column, I incorrectly highlighted the WSJT-X Call 1st tickbox when I should have highlighted the Tx even/1st box. It is the Tx even/1st box that forces FT8 to transmit on the 1st and even timing cycles. This is a convention used when calling for DX contacts. Under normal operation, the software automatically looks after cycle selection when you double-click on the station you want to work.

That's it for this month, but I'll have more on FT8 and some other modes next time.

Continued from page 47

have three or four different contests on the same dates, and many of the European contests are CW/Phone, which means phone all over the bands. I am only interested in QRP (40W) CW work, but it is almost impossible for DX work at weekends nowadays. I can well understand the frustration of W2OHE as he only has 15 minutes each Saturday and Sunday in which to pursue his hobby. I am much luckier as I can do so during the week and keep off the air during the many contest weekends.

He asks in his letter – What is the answer? How about doing away with all contests (except UHF ones) for a year, at weekends? This would give many amateurs, especially the really low power stations a fair deal. I know this is only a pipe dream! Barbara M. Dunn G6YL, Carlisle, Cumberland, England".

Conclusion

The internet has many articles that claim that Barbara Dunn remained the United Kingdom's only YL transmitting amateur until 1932, when Nell Corry of Tadworth, Surrey, became G2YL. However, my research and the assistance of the RSGB, now indicates that Miss B. Saltmarsh was the first female operator in the UK and unlike Dunn she did not openly seek the limelight in the amateur radio hobby.

The exploits of Dunn are still quite remarkable in a hobby that was male dominated. The transmitter, that Dunn operated on 23 and 45m is housed in the museum at RSGB head office. By the mid-1970s she had worked/confirmed with 144 countries, despite suffering from ill-health. A true pioneer of social change in amateur radio.

Acknowledgements

Thanks to Elaine G4LFM – RSGB Editorial Desk – for additional insight on the early female radio amateurs.

Suggested Further Reading

- *Tribute to Barbara Dunn G6YL*
The K8CX Ham Gallery:
<http://hamgallery.com/Tribute/G6YL>
- British Young Ladies Amateur Radio Association England's First YL Radio Operator:
<https://tinyurl.com/yyhfla3>
- Southgate Amateur Radio News:
90th Anniversary of G6YL:
<https://tinyurl.com/y47wxglo>

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Capacitors & Capacitance (Part I)

Eric Edwards GW8LJJ
ericgw8ljj@outlook.com


Capacitors along with resistors are the most used components in an electronic circuit. A capacitor is a two-terminal electrical device used to store electrical energy in the form of an electric field between the two plates, Fig. 1. The unit of capacitance is the Farad (F) and is named after the English physicist **Michael Faraday** (1791 – 1867). The Farad measures how much electric charge is accumulated on the capacitor. One Farad is the capacitance of a capacitor that has a charge of one coulomb (C) when applied a voltage drop of one volt. The coulomb is the amount of electric charge (Q) by a constant electric current of one ampere flowing for one second. The higher the capacity, the higher is the amount of (DC) electricity a capacitor can hold.

Capacitors are used in circuits for many different purposes and are common components of filters, oscillators, power supplies, amplifiers and other electrical and electronic circuits. They come in various shapes and sizes, depending on their capacity, working voltage, type of insulation, temperature coefficient and other factors and their capacitance values can be fixed or variable. The photo, Fig. 2, shows a selection of capacitors, while the symbols for capacitors are shown in Fig. 3.

Capacitor or Condenser

We use the term capacitor when referring to capacitance but condenser was the name that many old timers (and I am one) used when describing the component. The name came from the year 1746 when the capacitor (condenser) was invented by a Dutch scientist, **Van Mussenbroek**. There were others and as with all inventions and discoveries there is always more than one person experimenting and developing alongside and from the works of others. The original condenser was a Leyden (Leiden) Jar, which stores a high-voltage electric charge (from an external source) between electrical conductors (foil) attached on the walls of the inside and outside of a glass jar. A terminal in the jar lid makes contact with the inner foil. Electricity, which was 'condensed' in the jar, was capable of storing charge in a very small space and consequently was named condenser. There are microphones that are still called condenser types but generally the term capacitor is used for the actual component. Many of you

Eric Edwards GW8LJJ explains the basics of capacitance, in the first of two parts.

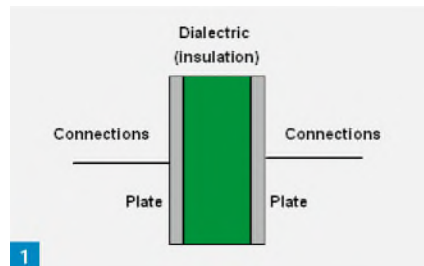

will have replaced the points and condenser in your petrol car!

The Capacitor at DC

A capacitor is similar to a battery, but whereas a battery generates energy, a capacitor is a much simpler device that can't produce new electrons but stores them. Unlike a battery, it does not use a chemical reaction and can only hold a very small charge. Inside the capacitor the terminals are connected with two metal plates separated by a dielectric material (such as paper (waxed), mica, ceramic, air, gas and other insulating materials). These separate the plates and allow them to hold opposite electrical charges maintaining an electrical field. Capacitors can be useful for storing charge and quickly discharging into a load. A large (several Farads) capacitor also works as a small rechargeable battery and is used as a temporary 'battery' for maintaining the data in EEPROMs. A very large capacitor can only light up an LED for a few seconds because of the current (milliamps) required by the LED, but can supply a backup voltage for some considerable time as the EEPROM draws very little current (nanoamps).

Charging a Capacitor

The term 'charging' simply means the transfer of electrons from a battery or other power source to the plates of a capacitor. The positive terminal of the battery is connected via its connecting leads (for through-hole capacitors) to one plate of the capacitor. If a polarising capacitor is used, such as an electrolytic type, the positive of the battery must be connected to the positive connection of the capacitor. The negative terminal of the battery is connected to the other plate (connection) of the capacitor, Fig. 4.

Most capacitors are of the non-polarising types but usually larger capacitor values (1 μ F,

10 μ F, 100 μ F, 1000 μ F and so on) are polarised and are either electrolytic or tantalum types. It is very important to observe the polarity of these as they can get hot and even explode if incorrectly terminated, especially the tantalum types. The voltage rating of all capacitors must also be observed otherwise that could also be destructive. When using capacitors, the safe voltage rating is about 50% above the voltage applied to the capacitor. If a capacitor is used to decouple (place across) a 12V DC supply, the voltage rating should be 18V but a higher voltage working such as 22V will also be suitable. This applies for non-polarised as well polarised capacitors.

How it Works

Whenever voltage is applied across capacitor plates (also known as charging of a capacitor), current starts to flow and continues to do so until the voltage across both the plates becomes equal to the voltage of the source (applied voltage). The two capacitor plates are separated by a dielectric material, which is an insulator, so no current can pass through it. The dielectric is also used to increase the capacitance of the capacitor. The thickness or amount of the dielectric plays an important part in the capacitance along with the size of the capacitor plates. Capacitance increases with the size of the plates, the gap between them and the nature of the dielectric.

When a DC voltage is applied across the plates of a capacitor, the current is maximum at first but as the voltage across the capacitor plates rises to the same level as the applied voltage, the current decreases, to zero once the voltages equalise. Thus, voltage across a capacitor lags current.

The Capacitor at AC

Immediately an AC (Alternating Current) waveform is applied to the plates of a capacitor, maximum current will be flowing, and minimum voltage will be across the capacitor as when applying a DC voltage. Let's consider an AC waveform consisting of the alternate reversal of a DC supply (battery). The battery and capacitor with a reversal switch is shown at Fig. 5. The battery is connected to the common contacts on a DPDT (Double Pole Double Throw) switch. The capacitor leads are connected to the contacts that are made

Read more radio news and reviews at www.radioenthusiast.co.uk/news



Fig. 1: The basic construction of a capacitor.
Fig. 2: A selection of capacitors used in electronic circuits. Fig. 3: Symbols used for capacitors.
Fig. 4: Simple circuit showing how charge builds on the capacitor. Fig. 5: As Fig. 3 but with a switch to allow the direction of current flow to be reversed. Fig. 6: Using analogue meters to observe current flow in a capacitor. Fig. 7: The effect of applying a sinewave voltage across a capacitor.

when the switch is 'thrown' (placed) in the up position, which puts the battery positive on the left-hand plate of the capacitor with the negative from the battery on the right-hand plate of the capacitor. When the switch is placed in the down position it reverses the polarities of the battery on the capacitor. The capacitor first charges up with the electrons flowing from the negative terminal of the battery to the right-hand plate and stops when the voltage across the capacitor is equal to the battery voltage. If the switch is reversed the electrons now travel from the negative terminal of the battery to the left-hand plate of the capacitor. When the power supply is removed, it will show the voltage across the capacitor plates. The capacitor is now charged and will remain until discharged. However, there is no perfect insulator and the capacitor will discharge over time because of leakage in the dielectric (insulator).

See the Current Peak

The effect can also be seen with an ammeter placed in series with the battery lead and the capacitor plate. As soon as the battery voltage is applied, the pointer on the ammeter peaks then goes back to zero showing that current (very fast) was sent from the battery negative lead to the capacitor plate. Using two AVOs, Fig. 6, or any analogue multimeter or ammeter set to DC100mA (0.1A) and the battery (DC power supply) to 12V (or 13.8V) placed in series with both capacitor leads, when the power supply is switched on or battery connected, the pointers on both of the meters will indicate a sharp increase in current then return to zero.

The power supply positive lead is connected to the one AVO DC+ terminal and the positive lead on the electrolytic capacitor is connected to the negative DC- terminal of the same AVO. The power supply negative lead is connected to the DC- terminal on the second AVO and the DC+ terminal connected to the negative lead on the capacitor. This indicates that although current does not pass through the capacitor, it flows through anything in its path. In this case the two AVOs. But once the capacitor is charged no more current flows and the capacitor stays at the voltage it has reached. The AVOs shows the surge of cur-

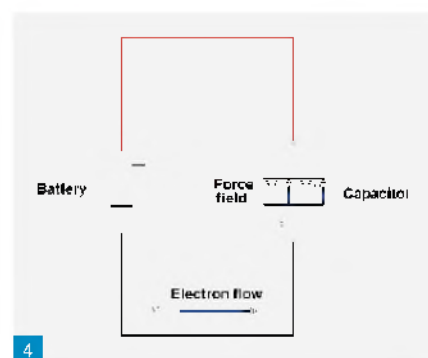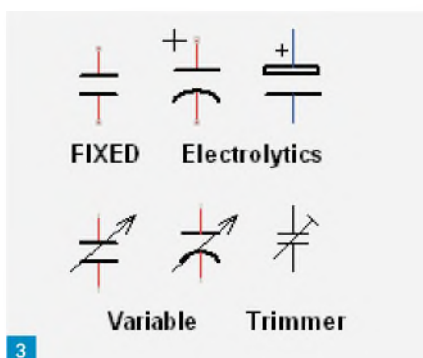


rent and if a scope were connected across the capacitor (the earth lead of the scope connected to the negative terminal of the battery) with DC selected on the scope and the probe connected to the positive side of the capacitor, with the power supply removed the scope will display the voltage held in the capacitor.

Sinewave


If we apply a sinewave (such as our UK mains, which is at 50Hz, or frequencies within the audio spectrum), the current will reduce as the capacitor charges up while the voltage on the capacitor plates will increase. When the voltage is at maximum, the current will have reached minimum. This is effectively a pair of sinewaves (one voltage, one current), 90° out of phase alternating minimum and maximum. The current first as it charges the capacitor then it is followed by the voltage as the current flow to the plate of the capacitor reduces.

Push Pull

Or perhaps that should 'push push'. The voltage increases quickly and the electric (force) field strength in the dielectric of the capacitor is changing quickly. As the field gets stronger, it pushes more electrons out of the posi-

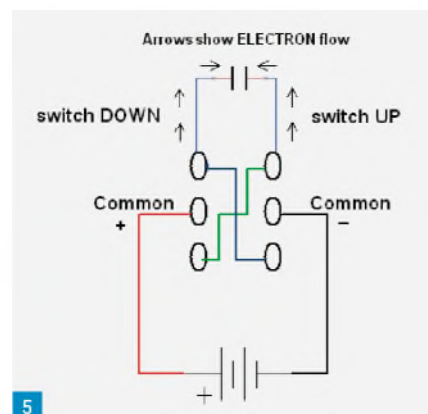

tive plate (due to increasing electric force on them created by the field). A capacitor is an open circuit and current does not flow through a capacitor but to or from one plate or the other. This causes an electric field to build in the dielectric, which affects the free electrons on the other plate via electric force. The capacitor plates are of conductive metal, so lots of free electrons exist in them. The voltage difference between plates, generated by the sinewave source, will push free electrons from the negative side of the source onto the plate it is connected to. This builds an electric field within the dielectric of the capacitor such that electrons are pushed by the

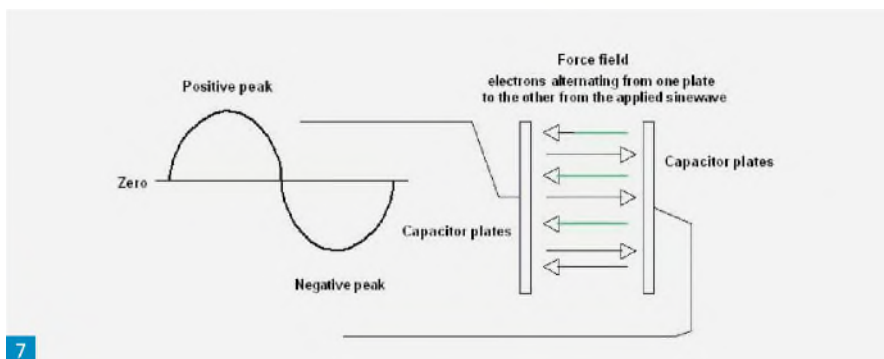

electric force out of the opposite plate. The circuit carries them back to the positive leg of the source supply.

The force field acts like a flexible barrier, Fig. 7. The direction of the lines of force shown in the dielectric in the diagram shows electrons being repelled from one plate making it positive. This results in storage of charge. The electric field distorts the molecular structure so that the dielectric is no longer neutral but is stressed by the electric field force. This results in a charge in the dielectric. When the phase of the sinewave changes, the lines of force are reversed, the dielectric is once again distorted and a charge is held but in the opposite polarity. This alternation of the field force and distortion of the dielectric pushes out the electrons from the opposite plates and gives the impression that current flows through the capacitor.

Elastic Barrier

To reiterate, the electrons on the negative capacitor plate try to cross to the other plate connected to the battery positive terminal and fill in the gaps left by the depletion of electrons (they were attracted to the positive terminal of the battery) and as they try to get across, a force field is created that is like an elastic barrier as it bulges out to reach the other plate. They cannot get there because

of the insulation but in doing so they 'push' out more electrons from the positive plate. As more and more charge is pushed into the negative plate, the field grows stronger and more electrons are pushed off the other plate. However, since the rate of change of voltage is slowing as we reach maximum voltage (at 90°), our field strength is still increasing, but more slowly all the time. For that reason, fewer and fewer electrons are pushed off the positive plates so the current flow is getting smaller. At the point of maximum voltage, the rate of voltage change is zero, so there are zero more electrons being pushed off that positive plate. At that point the voltage begins to fall, and the field weakens. This allows some of the pushed-out electrons from the positive plate to come back into it. As the voltage rate of change accelerates and the voltage falls back toward zero, the rate at which electrons return to the positive plate accelerates (current rises). When the voltage is at zero, it's changing at its maximum rate, so you have maximum current flow in the circuit (electrons are coming back to the plate as fast as they ever will for this circuit). The other half of the waveform (negative lobe of the voltage sinusoid) is the same, but switches the plates from negative to positive.

(To be continued in part 2)

Radio Round-up

ANOTHER CANCELLED RALLY: Following the Government's new guidelines for social distancing and events, the Rochdale and District Amateur Radio Society rally re-scheduled for Saturday November 28th 2020 will not now be able to take place.

FCC FEE PROPOSAL: The ARRL (American national society) is urging members to strongly oppose the proposal by the FCC (regulator) to introduce fees for amateur licences. In a special edition of the ARRL Letter issued October 27th the League is urging its members to oppose the FCC proposal to charge a fee for licence applications, renewals and upgrades.

The ARRL says: "ARRL will file comments in firm opposition to an FCC proposal to impose a \$50 fee on amateur radio licence and application fees. With the November 16th comment deadline fast approaching, ARRL urges members to add their voices to ARRL's by filing opposition comments of their own".

Under the proposal, amateur radio licensees would pay a \$50 fee for each amateur radio application for new licences, licence renewals, upgrades to existing licences, and vanity call sign requests. The FCC has also proposed a \$50 fee to obtain a printed copy of a licence. Excluded are applications for administrative updates, such as changes of address, and annual regulatory fees. Amateur Service licensees have been exempt from application fees for several years.

www.arrl.org/arrlletter

AMSAT SYMPOSIUM SATELLITE TALKS ON YOUTUBE

The video of the 38th AMSAT Space Symposium and Annual General Meeting, held on October 17th 2020, is now available to view on YouTube. You can join the AMSAT News Service Mailing List at: www.amsat.org/mailman/listinfo/ans

NEW MODES IN WSJT: WSJT-X 2.3.0 is a program upgrade offering two new modes designed especially for use on the LF and MF bands. FST4 is for two-way QSOs, and FST4W is for WSPR-like transmissions.

Both modes offer a range of options for T/R sequence lengths and threshold decoding sensitivities extending well into the -40 dB range. Early tests have shown these modes frequently spanning intercontinental distances on the 2200m and 630m bands.

Further details and operating hints can be found in the Quick-Start Guide to FST4 and FST4W, posted on the WSJT website:

<https://tinyurl.com/yyr8yaeb>

Download WSJT from:

<https://tinyurl.com/ozca2ss>

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Harry Leeming G3LLL
HARRYG3LLL@gmail.com

I always found that trying to decipher signals buried in noise was much easier if I used headphones, and for many years this was my preferred mode of operation. There is a danger when wearing headphones, however, in that you tend to be less conscious as to how loud the signals are, as you are isolated from room noise, and hence have no reference level. In my case I am paying the penalty of all that listening on noisy channels, as I have become deaf and have to wear hearing aids. Learn from my mistake and when wearing phones use the lowest possible volume setting.

And Talking About Hearing Aids

The age-old problem, with any kind of portable electronic device, has always been the difficulties in storing enough electricity, and of reducing size. I can still remember as a child an elderly gentleman (well he was probably younger than I am now!) who had an ear-piece plus a heavy box hanging around his neck at church. This often emitted whistling noises during services, much to my amusement. Later, as technology progressed, slightly smaller aids were developed, still full of valves, and some of these early devices, ended up being sold off on the surplus market. Radio magazines such as *PW* then published DIY articles showing how to convert them into portable radios.

Move on to this century and due perhaps to the large number of young people who have spent a great deal of time listening to loud music, increased numbers are become deaf at an earlier age, and hearing aids are becoming even more important.

Having for many years experimented with making speech clearer on amateur radio equipment, I was pleasantly surprised at the care that was taken to match the response of the NHS hearing aids I was supplied with some years ago by the Lancaster and Morecambe Audiology department to the response of my hearing. Modern hearing aids are a marvel of miniature solid-state electronics and Audiology has become a very worthwhile career to anyone interested in sound and electronics, and who likes helping people.

Storing electricity is still a problem, however, and recently I was having trouble with my aid's batteries, **Fig. 1**, having only a very short life. I started trying to test one that had apparently failed, with my digital meter. It should have read about 1.4V but only registered around 1V. I was just going to throw it

Listening on Headphones

Harry Leeming G3LLL starts with headphones, which takes him to hearing aids, on to starting a shop and ending with diodes!



in the bin when I noticed an odd effect. The voltage was gradually rising, and after about five minutes was showing a full 1.4V. I refitted it to my aid and it then functioned perfectly for a few more days. What on earth was going on?

I had a search on Google and ended up on Rayovac Hearing Aid Batteries' website, which had a most interesting article: <https://tinyurl.com/y8kx5lg2>

The latest batteries for hearing aids use 'Zinc/Air' technology. They arrive in a packet and on the top of each battery is a red label. It is not just for decoration, as removing it exposes some very fine holes in the battery's case. Normal batteries use the reaction between metal, carbon and other chemicals to generate their output, but Zinc/Air batteries use only zinc, which reacts with the oxygen in the air once the red label has been removed.

In my case it would seem that the hot weather had caused me to sweat (or perhaps I had forgotten to wash behind my ears!) and that this had either blocked up the very fine ventilation holes in the batteries or those in the aid's case, **Fig. 2**. I can't help wondering as to how many perfectly good batteries are thrown away just because the holes have got blocked. I have now noticed that if my batter-

ies fail when I am away from home, and have not got a spare, if I wipe the them with a hanky and blow into the holes, I get a few hours extra use from them – worth knowing!

Zinc/Air batteries and rechargeable power cells seem to be popping up in all sorts of places, such as being used to store the output of wind farms, and are even proposed for use in electric cars, so it is worth keeping your eye on developments.

Thinking of Opening a Radio Shop?

If your hobby is radio, computers, or even gardening, it can be quite tempting to make it into a business, but first of all you have to ask yourself if you have the ability to organise a business, and as to what the competition is like? Can you offer repairs and anything special that the nearest competitors can't match, and have you plenty of contacts in local clubs who are likely to patronise you?

Also, are you or your partner good at record keeping? The tax and VAT inspectors require a complete trail showing all your takings and expenses, where they originated, and where they go to. They are inherently suspicious of cash, and I can remember being grilled and having to show proof that the

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Fig. 1: Harry's hearing aid with batteries.

Fig. 2: The small breather holes.

cash I had taken had ended up in the bank, and not my pocket. Fortunately, my wife Brenda is gifted in keeping clear tidy paperwork, and took charge of keeping the records, or I should have been lost.

VAT can be a real headache. This is levied on all shops with an annual turnover of over £85,000 and if you get your paperwork wrong, it can cost you a lot of money. When VAT started I was told that everything I sold, that was my property, was liable for VAT, which was then levied at 10% and which was added to the final purchase price. When I purchased new equipment from a registered supplier this was no problem. VAT was added to the price I paid, and I was given a VAT invoice with their registered number on it, with the VAT I had already paid clearly shown. When Brenda submitted the 'VAT Returns' to the VAT office she was able to deduct the VAT that we had paid to the supplier, and we only paid VAT on our profit.

The real problem started with second-hand equipment obtained from private customers.

Yes, VAT was then only 10% but it still meant that if I part-exchanged or purchased a rig from a private non-VAT registered customer for £300, serviced it and sold it for £330, I had to pay £30 VAT. Hence this wiped out my profit and the payment for my work, even more so when the level of VAT was increased. I stopped selling any second-hand equipment that was my property, and arranged to sell it on a 'commission sale' basis, but this involved extra paperwork.

VAT is much higher nowadays so this could have killed the second-hand business, but fortunately there is now a somewhat simpler way of accounting for VAT on second-hand goods. However, there are still traps for the unwary who don't get their paperwork or computer records correct and you may need to pay an accountant to help you setup a legally watertight system.

I heard of one trader who got himself into



dead trouble. Over a length of time a VAT inspector had kept a record of the second-hand equipment that had been in his window, and had disappeared, presumably sold. At the next VAT inspection the trader was challenged to account for the several thousand pounds VAT that would have been chargeable on these goods. "Oh, they were not mine so I only declared VAT on my profit" was his defence. "Where then is the paperwork, with the names and addresses and signatures of the owners, proving they owned them, and not you, at the time you sold them?" He could not produce these, so it cost him a lot of money.

There are many other things that you must think of before starting a shop, but that is enough for this time

Switching Diodes

The contacts on relays, band-change and other switches in electronic equipment do tend to give trouble, and replacing or cleaning these on amateur radio and hi-fi equipment was 'a nice little earner' when we had the shop. Modern rigs have replaced most of these with 'reliable' switching diodes, so this source of trouble is disappearing, only to be replaced with more mysterious faults.

Have you started to hear your own voice in the speaker as you are transmitting, had your rig burst into oscillation, found that the

receiver has become very noisy, or come across other odd effects? These are quite possibly caused by a leaky switching diode.

The switching on most modern rigs is carried out by placing a positive voltage on either the transmit (TX) or receive (RX) line. These will be marked on the circuit diagram something like 'TX 8V' or 'RX 8V' (or whatever voltage is used). This voltage will be applied to the various amplifying stages and relevant switching diodes, to turn them on and off in the TX or RX modes as applicable. If you check the voltage on these lines, only one should carry a positive voltage when in the appropriate TX or RX mode, and there should be no positive voltage, and sometimes a slight negative voltage, on the other. If there is a slight positive voltage on the line that should not be active, there is probably a leaky switching diode. The most likely diodes to fail are those nearest to the antenna, and tracing these will involve removing circuit board connector plugs, and a little unsoldering using trial and error to track down where the voltage is coming from.

Schottky barrier diodes are normally recommended as the most efficient type for RF switching, but some of these seem very susceptible to being damaged by voltage spikes. I had quite a bit of trouble with the switching diodes located near to the antenna input of the FT-757, and in the end started replacing them with normal 1N4148 ones. These had a much higher voltage rating, and while they were not intended for RF use, I could detect no difference in performance.

Even when using these I did have the odd repair which 'bounced' back with the replacement TX/RX switching diode having failed. I could find no reason for the failure, and in desperation I replaced the failed diode with a much larger 1500V 2A mains rectifier diode. Once more I could detect no difference in performance and the rigs did not fail again. I did warn the customers, however, to advise any future repairer as to the reason why the large diode had been fitted, as otherwise he would have been tempted to replace it with the 'correct' one.

In this month's RadioUser

- Review: Moonraker MHR-100 VHF Maritime Transceiver
- Review: Tecsun PL-990x (Part II)
- CB Radio: An Introduction (Part II)
- Who Invented Morse Code?
- Early Valve Portable Radios

Plus your favourite regular features & columns

The December Issue is on sale on the 26th November 2020



Geoff Theasby G8BMI
geofftheasby@gmail.com

I received a camera tripod for my birthday, and it was while I was contemplating this that I realised that with a 2m whip antenna or a small beam attached, it could be useful for going portable, for example in contests such as the *PW* Low Power and the RSGB Backpackers as well as in SOTA events. Collapsible poles are good, but need guying, and the *PW* Tenna-Tourer is very good if you can drive to the transmitting point, but I was looking for something that would pack down very small, and would be quick and easy to erect. I then thought that the legs of the tripod, if connected up as the ground plane of a vertical, would complete the ensemble. The reason being that a horizontal ground plane exhibits a low impedance at the base of the antenna, of about 25Ω. Drooping the radials at 45° increases this impedance to about 50Ω.

Idly thinking about tripods in the all-too-brief period between waking and setting off to work, I conceived the idea of using a magnetic mount antenna, such as I have for my car. If a small sheet of steel had a central hole, tapped to match the screw on the tripod, then radials could be attached to this plate in the manner of a ground plane, and the mag-mount would sit on this. Of course, if the steel sheet were tapped in the middle, then protrusion of the tripod screw would interfere with the mag-mount. Therefore, if a matching nut were to be brazed or glued to the steel sheet, the mag-mount would be free to attach. Furthermore, to stop the waving of the whip antenna stressing the brazed or glued joint, if a ring, approximating to the dimensions of the top plate of the tripod, could be fitted, or perhaps four more nuts were similarly attached, the strain on the mounting nut would be reduced, Fig. 1.

A mag-mount antenna would also be pre-matched to a horizontal ground plane, as when attached to a car, so the tripod legs need not be used as radials, nor the radials drooped. What is more, the concept of attaching a nut to the steel sheet could be carried further. A small beam, HB9CV or a little larger, could be similarly prepared, with three nuts in a line, placed at the centre of gravity of the beam. The pan and tilt head of the tripod would allow for rotation and, if need be, polarisation change. (Although the metal tripod legs would interfere with the radiation pattern of the antenna when set for vertical polarisation) Rather than solder the radials



The G8BMI Tripod

Not a kit as such, but **Geoff Theasby G8BMI** repurposes a camera tripod.

direct to the steel sheet, if small sockets were to be attached to the corners, or every 90° around a circular plate, then the radials would be easily removable for transport. The result is more or less the finished article, Fig. 2.

Construction

I cut a 150mm square sheet of steel 0.5mm thick, from a piece I found in a scrap yard. Wrappers from cookers, fridges or office equipment, or even car body panels can be used for this, the only requirement being that it is flat, stiff enough to resist the bending effect of the antenna, yet thin enough to cut easily, and magnetic. I obtained a piece for nothing from the scrapyards, after I explained my requirements. I was given a hard hat and told to look "over there". Please be aware that, although aluminium alloy sheet, when cut, is reasonably easy to deal with, steel sheet when cut with tinsnips or a nibbler, is razor sharp, and will draw blood easily. Run down the edges with a file or grinding wheel, and keep the Elastoplast handy!

Five nuts were Araldited to the centre of the plate in a diamond formation. To prepare the plate, remove all paint and

rust from the steel, and degrease the nuts, especially if they are new. I washed the nuts in white spirit. They need to be ¼in BSW thread, which is fairly standard for tripods. If you do not remove the paint, you are dependent on the strength of the bond between the paint and the steel. With the paint removed, the bond is much better, Fig. 3.

The precise spacing depends on the size of your tripod's camera mounting surface. Many tripods have a quick release at the tip, Fig. 4.

Then, solder four 4mm wander sockets to the corners. Use a large bit in the soldering iron, because there is quite a lot of metal to heat up, but clean steel solders well.

To make the radials (Do this while the glue on the nuts is setting) cut four pieces of stiff copper wire. I used 16gauge hard-drawn enamelled copper wire offcuts from a 40m antenna project. Cut them to 550mm long, assuming they are for the 2m band. This is to allow for trimming to frequency later. Radials should be one quarter wavelength at the frequency in use. Solder each one to a 4mm wander plug. That is more or less it!

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk



Fig. 1: The components. Fig. 2: Assembled.
Fig. 3: Nuts glued to base. Fig. 4: Tripod QR top.

In Use

The square plate screws to the tripod, the whip antenna (I used a 5/8-wave whip) mag-mount sticks to that and the radials plug in to the corners. If you are using a beam, attach that to the tripod instead of the steel sheet, and you don't need radials. Extend the tripod legs to their fullest extent, wind up the centre column if there is one, and bingo! A vertical or small beam ready for action. What is more, the antenna is more than a half wave above ground on 2m or above, which is recommended. If you use a camping chair, or one which is quite low, you will not distort the radiation pattern of the antenna too much, as you will be 'below' the ground plane and the antenna will not 'see' you. My 5/8-wave whip used in this configuration returned an SWR of 1.2:1 when mounted on the car roof. (Which is a perfect ground plane, being a continuous steel sheet) On the tripod, which extends to a height of 5ft, it gave an SWR of 2:1.

Trimming the radials down by a couple of centimetres reduced this to 1.7:1, but trimming more off this length had no noticeable effect. During construction I found that the radials I used were too short and I had to lengthen them. This may be seen



in the photographs. I tried a smaller tripod, which extends to 3ft high. This also resulted in an SWR of 2:1. I tried connecting the legs electrically as drooping radials, using short lengths of flexible wire and crocodile clips and no radials. This made the SWR 4:1, and with the radials reconnected 2:1. This suggests that there is no advantage to connecting up the legs as radials. The HB9CV gave an SWR of 2.2:1 when mounted on the large tripod, which is acceptable, and suggests that the whips are reasonably matched. Tripods of the type described can be found from about £20 in photography shops, or the CPC Catalogue: www.cpc.co.uk



Going equipped for remote portable operations requires some thought, and taking directional antennas more so. This option provides an opportunity to take lightweight, directional or omnidirectional antennas quite some way off the beaten track for very little effort.

Read more radio news and reviews at www.radioenthusiast.co.uk/news

Part 1: Eating Humble Pie

Richard White G6NFE
practicalwireless@warnersgroup.co.uk

I hadn't built anything in kit form for about 38 years, but after a long lapse in amateur radio and renewing my licence in 2015 after discovering I could now use the HF bands with my 1982 'Class B' licence, it was time to try my hand at building and testing again. At the back of my mind was the memory of the embarrassing letter I received in the past 38 years ago after complaining to the manufacturer that their kit 'didn't work', only to have my poor construction skills pulled apart and my glaring errors highlighted and corrected (for a small fee)!

Could I build a modern radio in kit form? Did I have the requisite soldering skills? Could I remember the resistor colour codes? As it turned out I needn't have worried, the instructions with the Walford Electronics kits are excellent as I will explain later.

An Idea Comes to Fruition

The idea to try kit building again had probably been forming in my mind for some time. In 2019 I purchased some used RF test equipment, checked it, and satisfied it all worked, neatly stacked it away determined to find a use for it. Originally, I intended to refurbish some old Yaesu hybrid HF transceivers, but in a small house with four family members and a lively Greyhound, finding the space to tear them apart proved impossible.

Then came the chaos and fallout from Covid-19. No more shopping, cinema, coffee shops, restaurants, socialising, etc. What to do? How much TV can you consume before enough is enough? How many times have you tried a new author only to find the new book isn't doing it for you? Hmm. I needed to find something I could dive into, think carefully about what I was doing and start remembering things long forgotten.

Most importantly, I had to be able to walk away from it when I wanted and then pick it up where I left off. Then the penny dropped. I had vague recollections of an article about the *Halse and Hatch* HF radio kits from Walford Electronics.

Finding the Walford Electronics website completely convinced me. After drooling through the various pages, I somehow and rather foolishly, convinced myself I

Richard White G6NFE enjoys building the Ivel receiver from Walford Electronics.



could build the most complex kits and I would have them working perfectly in shiny enclosures beautifully hand crafted by myself. The power of dreams. Oh dear.

The Kit Arrives

The *Halse and Hatch* duly arrived along with the frequency counter kit and the power amplifier kit. Inside was a polite note from **Tim Walford** advising me to take it slow. Hmm. Does he know something I don't? The answer is undoubtedly yes, he does. I think what he was trying to tell me was "take it easy, these kits require real care, preparation, consideration, manual dexterity, test equipment and lots of patience". Not to mention the use of skills that in my case I hadn't practiced for many years, such as soldering and desoldering....

The reality hit me like a brick. I'd taken on too much, too soon. My ambitions and imagination were writing cheques my kit building abilities couldn't cash. Without admitting my over ambition to my wife, I quietly put the kit parts to one side and had a re-think. About a month passed

and then one day I just happened to be on the Walford Electronics site again. I'd found the answer. I would start out with something simpler, much simpler. And so, the logic went as follows: I ordered the *Ivel* HF receiver classified as a 'simple' kit, and also the *Ilton* HF transmitter, classified as an 'intermediate' kit. If, and it was a big if, I could get these working then, and only then, would I attempt the *Halse and Hatch* with the frequency counter and power amplifier.

Credit Card Time

Out came the credit card again. Here goes. Better get it right this time! As before, the *Ivel* and *Ilton* arrived in good time and very well packaged. Tim is very good at letting you know how things are progressing with the order as well as replying to any technical questions that may arise.

After obtaining the required authorisation from my wife I reserved an area of kitchen worktop with a promise it would all be cleared away well before dinner in the evening. Woe betide the

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Photo 1: First stage of build.

Photo 2: First check of the audio section.

Photo 3: Final alignment for centring the frequency and peaking up signal level.

amateur radio kit builder who holds up dinner and leaves a mess on the kitchen worktop!

Thinking about what I needed I reasoned on: (a) biscuit tin with lid, (b) soldering iron, (c) DMM, (d) some basic tools such as cutters, pliers, tweezers, and also (e) a power supply of some description. The frequency counter and signal generator could wait until further down track; I didn't need them now.

Getting Started

Each kit comes in its own clear plastic bag with very clear instructions and colour photographs to help you understand the layout of the board. At this stage I recommend the builder puts the kits still inside their bags into a biscuit tin with a tight-fitting lid. This will reduce the chances of the accidental escape and potential loss of extremely small parts.


On examining the *Ivel* it is immediately apparent just how much thought has gone into developing the radio. The components appeared to be of the best quality and the instructions are clear once read and re-read a number of times.

This is also a good time to print off a resistor colour code chart if like me, you last looked at these 38 years ago! That said, the instructions do give you the colour codes and also explain what numbers to look for on other components such as capacitors, ICs and so on.

The instructions recommend building and testing the *Ivel* in stages and this is what I did. To minimise any build issues, I ticked each individual component off as I populated the board. The instructions recommend the soldering of the front panel to the main PCB before adding the pots and switches, but I wasn't sure I wanted to do this because of my lofty (read expensive) ambitions to mount the whole project in a metal enclosure.

So, after some thought, I applied a few dabs of super glue and prayed it would work. It did. Enough to hold it together, but not so much I'd damage the board when disassembling it later. A word of caution here: The instructions do not recommend this procedure. It was a personal choice. You have been warned!

Mechanical assembly was easy with all the parts fitting without issues and the colour photos were really useful as a

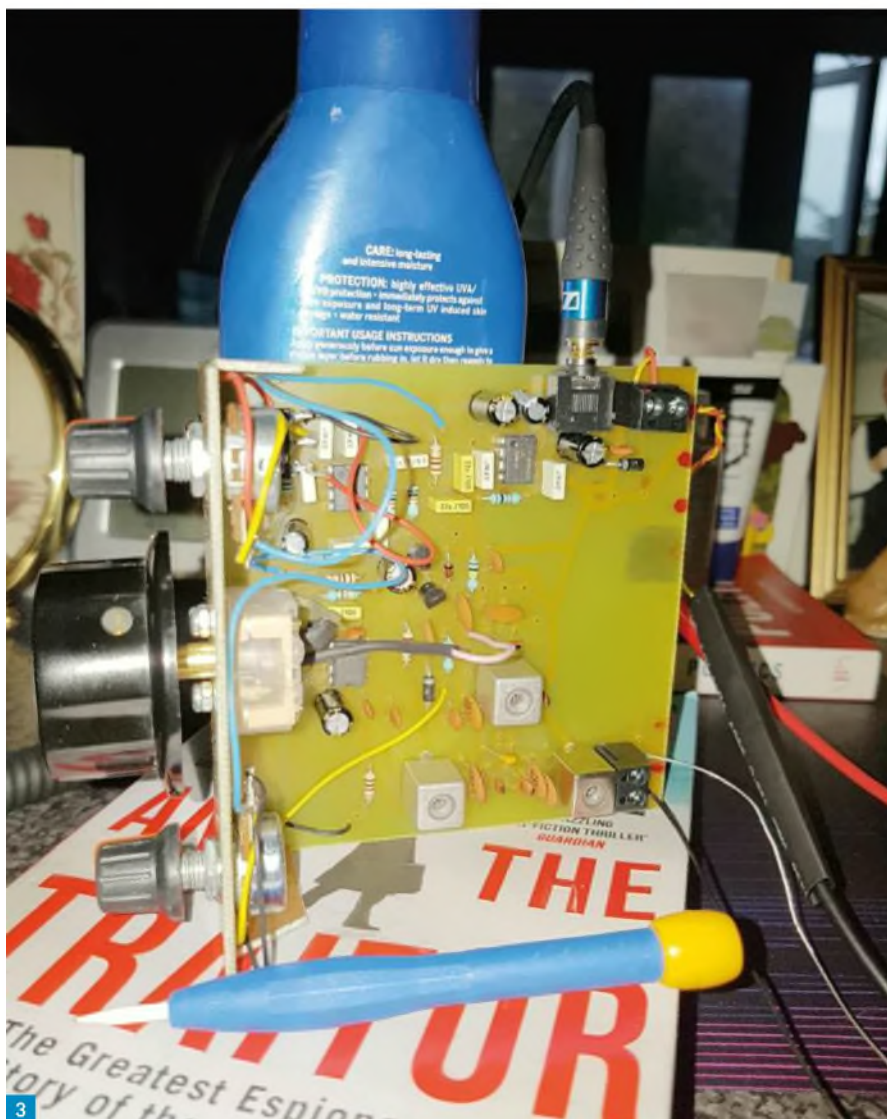

Read more radio news and reviews at www.radioenthusiast.co.uk/news

Photo 4: Final testing with signal generator attached.

reference. The value of the photographs becomes even more apparent as the build progresses.

Next came the electrical assembly. This started off easily enough; certainly, the two screw connector blocks, the stereo jack and the metal canned inductors are easy to locate and fit.

Moving to the smaller components raised the first challenge. My 58 year-old eyes are not quite as sharp as they used to be. I installed a resistor only to realise later that I had managed to confuse red with orange. Lessons learned; make sure you have very good lighting and, if required, a small magnifying glass to hand. One thing I did discover was the true 'Swiss Army Knife' ability of the modern smartphone. Using the camera with the built-in LED flash switched on, I magnified the image on the screen.

The results were outstanding and the impossible to read digits on the tiny Polyester capacitors were crystal clear. Oh, one other thing, use a good quality DMM if you have any doubts about the value of the resistor you are about to fit.

I carefully worked my way to the end of stage 1 and connected the wires on the 'fine' pot to the main board as described. The power supply was connected with the lowest power output I could select and the time had come. Power was applied. No smoke, no supply trip, no horrible smells. Measuring the voltage on point 8 showed 7.94 volts. Near enough to 8 volts. Phew!

Working through the Build

Working through the subsequent stages was not difficult. All you have to do is follow the instructions step-by-step and if text is in **bold print** there is a good reason for it! I made a note of all test voltage readings I got and ticked each stage off line by line. The only voltage that caused me concern was at the end of stage 4 where I measured 5.62 volts. A quick e-mail to Tim Walford confirmed it was near enough to the 6 volts required. Result.

Stage 6 is the stage you need to be decisive about. Choose your band and stick to it as the specific band is defined by the inductors and capacitors you choose at this stage. Something to point out here is the 20 metre band. As supplied, the kit covers the 30, 40 and 80 metre bands. If you want to use 20 metres, you need to flag this up when you order the kit. I chose the 40 metre band.



This final stage is where all the concentration and diligence comes together. Applying power, antenna and headphones, I could hear RTTY and CW. Obviously, it needed final alignment but it worked. Yes! The embarrassment of 1982 melted away. I could build a kit and, more importantly, it worked as the designer intended.

Testing, Testing

After this I decided it was time to break out the 2019 designer collection of RF test equipment. Hooking up my budget (extremely cheap) Chinese frequency counter to a divide-by-10 probe and a 150pF capacitor in series was not successful. The frequency wandered from 2.8MHz to 8MHz. Clearly it wasn't up to the job and demonstrated the value of good quality test equipment.

Thinking about it later it's entirely possible the counter was not at fault as I didn't install any vero pins in the test points on the main board. I recommend you do this because it could save a lot of frustration.

Lastly, I hooked up my signal generator to the antenna port on the board and extremely cautiously applied a test signal of -120dBm at 2kHz and 70% modulation on 7.150MHz AM. Astute readers will now realise why I couldn't hear the test signal on the Ivel receiver. Another quick e-mail

to Tim Walford and he pointed out the error of my thinking. How on earth did I expect to hear a test signal at -120dBm? As he said, S9 is considered to be -75dBm. I would have to come up a very long way....

Moving swiftly on from this 'schoolboy error' I could hear the test signal clearly. I aligned the receiver to be centred around 7.150MHz and this worked for me as I prefer the SSB segment of the band. Finally, I peaked up L2 and L3 for maximum signal strength and that was it. Job done.

Conclusion:

The Ivel is a good place to start if, like me, you haven't touched a kit or seriously played with components for a long time. The instructions are completely logical and very clear. It is entirely possible to build and test it with only a digital multimeter and another HF receiver to monitor the Ivel's VFO. You certainly don't need a frequency counter or signal generator. As I said earlier, the value of the colour photos becomes more evident as you move through the build, allowing you to sanity check the placement of components before you solder them in place. Technical support from Tim Walford is available if required, but to be honest the instructions are good enough that you rarely need it. A good quality receiver and highly recommended.

Practical Wireless 2020 Index

Article Name and Author

Month & Page

Feature Articles

100 Years of the UK Long-Range Maritime Radio Service, Larry Bennett G4HLN	Apr 13
A Bridge to the Revised Advanced Licence, Tony Jones G7ETW	Feb 44
A Club DXpedition, Billy McFarland GM6DX	Mar 58
BARTG Diamond Jubilee 2019, Roger Cooke G3LDI	Oct 52
British Science Week 2020, Steve Hartley G0FUW	Jun 38
Building Experience, Tony Jones G7ETW	Oct 57
Christmas Quiz, Steve Telenius-Lowe PJ4DX	Dec 45, 64
End of Year Quiz, Tom Morgan ZS1AFS	Jan 24
Exam Practicals, Tony Jones G7ETW	Jan 52
Get on the air to care, RSGB	Jul 38
Goonhilly Memories, Bob Harry G3NRT	Mar 34
How the RSGB is helping Radio Amateurs to build their experience, RSGB	Sep 14
J Birkett, Don Field G3XTT	Mar 51
Midsummer Antenna, Mark Foreman G7LSZ/SA6BD	Jul 12
On Top of the World, Maurice Webb GW0UGQ	Apr 61
Operating on Oscar 100, Bernard Nock G4BXD	Apr 10
Origins of Prosigns and Abbreviations, Tony Smith G4FAI	May 68
Pedestrian Mobile, Ken Churns G4VZV	Aug 38
Piloting a Software Defined Radio with Ham Cockpit, Steve Ireland VK6VZ/G3ZZD	Aug 62
Preparing for your Exam, Tim Hier G5TM	Jun 64
Radio at Depth, Part 1, Mike Bedford G4AEE	Sep 62
Radio at Depth, Part 2, Mike Bedford G4AEE	Nov 62
Radio Eye on the Sky, Part 2, Dr Bruce Taylor HB9ANY	Jan 56
S-Meter versus Time Display for the 21st Century, Ian Dilworth G3WRT	Sep 60
Seaside Operation, John Rowlands MW1CFN	Apr 36
Starting on Microwaves, Bernard Nock G4BXD	Nov 10
Submarine Radio, Philip Rush	Apr 48
Weather Watching and Radio, Georg Wiessala	Oct 46
Worldwide Remote Shack Digital Modes, Daimon Tilley G4USI	May 34

Projects & Practical

A Simplified Directional 40m Antenna, Part 1, Bob Whelan G3PJT	Nov 46
An HF Multiband Portable Antenna, Ron Taylor G4GXO	Feb 16
Antennas Using Fibreglass Poles, Don Field G3XTT	May 28
Baofeng Handie-Talkie mods, Paul Beaumont G7VAK	Dec 18
Base-Loaded Verticals for the Low Bands, Steve Telenius-Lowe PJ4DX	Jun 32
Building the Ivel Receiver, Richard White G6NFE	Dec 58
End Fed Half Wave Characteristics, Ian Dilworth G3WRT	Mar 62
Fibre Mast Vertical Antenna and n-Network ATU, Jonathan Hare G1EXG	Nov 54
Hints & Tips	Feb 63

Icom Automatic Antenna Switch, Peter Edwards GW8ARR	Sep 18
Improving Your Projects, Michael Jones GW7BBY	Feb 10
Intermediate Practical PCBs, Tony Jones G7ETW	Mar 26
Making a Start on the 630m Band, Part 1, John Adams G3ZSE	Aug 59
Making a Start on the 630m Band, Part 2, John Adams G3ZSE	Oct 18
Making Pretty Panels, Dr Samuel Ritchie EI9FZB	May 61
Making the most of the Half Square, Steve Ireland VK6VZ/G3ZZD	Jul 52
Semi-Automatic Bug Key, Martin Waller G0PJO	Aug 13
Soldering Coax Connectors, Part 1, Tom Morgan ZS1AFS	Apr 18
Soldering Coax Connectors, Part 2, Tom Morgan ZS1AFS	May 45
Modelling the EFHW, Ian Dilworth G3WRT	Apr 58
My First Steps with Satellites, Daimon Tilley G4USI	Jun 44
Rotator Renovation, Steve Telenius-Lowe PJ4DX	Jul 32
The Magic Box on the Piece of Wire, Tom Morgan ZS1AFS	Aug 54
Using an EFHW Antenna, Daimon Tilley G4USI	Feb 56
Wild Cat Antenna, Tom Morgan ZS1AFS	Mar 22

Reviews

Advanced Antenna Modelling (book) by Marcel De Canck ON5AU, Keith Rawlings G4MIU	Jan 30
Amsats and Hamsats (book), Daimon Tilley G4USI	Jun 48
Anytone AT-D578UV PRO Dual-band 144/430MHz DMR/FM Mobile, Tim Kirby GW4VXE	Mar 10
Bantenna, Don Field G3XTT	Dec 14
DSO Kit, Ian Dilworth G3WRT	Aug 58
DX Commander 10mABV Multi-Band Vertical, Steve Telenius-Lowe PJ4DX	Aug 10
Ham Air 2m Half-wave vertical inflatable antenna, Tim Kirby GW4VXE	Jan 18
Hogwash for Hamsters (book), Chris Colcough G1VDP	Feb 30
HyEndFed Portable Antenna, Tim Hier G5TM	Jul 18
Icom IC-705, Richard Constantine G3UGF	Dec 10
InnovAntennas XR6, Steve Ireland VK6VZ	May 12
KD1JV Morse Tutor, Tony Smith G4FAI	Mar 13
MCR Communications G5RV Antenna, Vince Lear G3TKN	Sep 10
MFJ-1234 RigPi, Don Field G3XTT	Jun 10
NanoVNA, Don Field G3XTT	Jul 10
Portishead Radio (book) by Larry Bennett G4HLN, Don Field G3XTT	Sep 50
QRPGuys DSB Digital Transceiver Kit, Martin Peters G4EFE	Jun 13
RadioToday Guides to the IC-7300/IC-7610/IC-9700, Don Field G3XTT	Mar 24
Raspberry Pi Explained (book) by Mike Richards G4WNC, Don Field G3XTT	Apr 46
Senhaix 8800, Tim Kirby GW4VXE	May 9
Venus Information Technology SW-3B Three-Band CW Transceiver, Martin Peters G4EFE	Jul 13
Yaesu FT-3DE 144/432MHz Dual-band transceiver, Tim Kirby GW4VXE	Jan 10
Yaesu FTM-300DE/R, Richard Constantine G3UGF	Oct 10

Regulars

Buying Second-hand Don Field G3XTT	Mar 48
---	--------

Carrying on the Practical Way

John Dunton G1RXC	Jan 42
Lee Aldridge G4EJB	Feb 42, Mar 42, Apr 42, May 56, Jun 42, Jul 50, Aug 50, Sep 38, Oct 38
Tony Jones G7ETW	Nov 10

Continued on page 63

Read more radio news and reviews at www.radioenthusiast.co.uk/news

Designing a 2m All Mode Transceiver

Joe Chester M1MWD
m1mwd@gmx.com

Joe Chester M1MWD wonders why there is no replacement for the single-band VHF multimodes of old.

Would you like to have a 2m/70cm all mode transceiver? When I say all mode, what I really mean is FM and SSB – I don't think AM is really important (tell me I'm wrong). Of course, the answer is to buy a multi-mode HF radio, one which covers 2m and maybe 70cm also. You will get a good transceiver, maybe 100W on 160-6m, and a bit less on VHF. However, it won't quite be a mobile or portable rig. Not quite bicycle friendly. Is such a transceiver possible? Let me rewrite the specification. VHF/UHF, FM and SSB, in a lightweight portable format, maybe 5-10W max output. Think of all the uses – 2m contesting out /P, or the SSB satellites. As there will be FM on board, it could be used as a mobile FM rig. As a backpacking radio, for SOTA work maybe.

The FT-290

I once had an FT-290. It was a lovely little radio for the time. FM and SSB, a few watts output, but it was fun to operate. I put it in my car and operated mobile on my daily commute, which was a 150km round trip at the time (I butchered a coat hanger to make a quarter-wave to mount on a wing of the car!). I also used it for /P 2m SSB operations during contests, with an HB9CV gifted to me by my original amateur radio teacher. My best performance was into the south of France from a hilltop in the centre of Ireland. Today, mobile operation, unless the car is parked, has been made more difficult by the huge increase in road traffic volumes, although many operators do work mobile. And /P operation, with a big HF transceiver, is also a more difficult operation than it was back then with the FT-290, sometimes even requiring a generator. As a footnote, I found myself looking longingly at a refurbished FT-290 at a hamfest recently – not huge money, but beyond the current budget limit. Perhaps that would be the answer?

Why no Replacement?

But wait a minute. Why is it that a transceiver with this specification is not on the market today? I've asked around, and the universal answer is that there is

no market for such a radio. Really? I can guarantee at least three customers, from a single chat about this on an 80m net recently. At hamfests over recent years I've spoken with suppliers and manufacturers' representatives. They all universally sing the same tune. No one wants such a radio. The development costs are huge, and without the certainty of worldwide sales there is no business interest in such a radio.

Now I'm not a marketing expert. But I can't see why there would be no interest in such a lightweight radio. Lots of amateur operators do portable work, and the annual 2m and 70cm contests are well supported. These are essentially SSB activities. So, my case is that there would be a demand, if such a radio was available. As it's not, there really is only one choice. No, I'm not talking about the second-hand or refurbished market. I guess I'll just have to design and build one.

Some Thoughts

Daft! Mad! But that's not what happened when I told this to a few fellow operators. Rather the reverse. Suggestions poured in, and I began to lose the thread of the very technical conversation that followed.

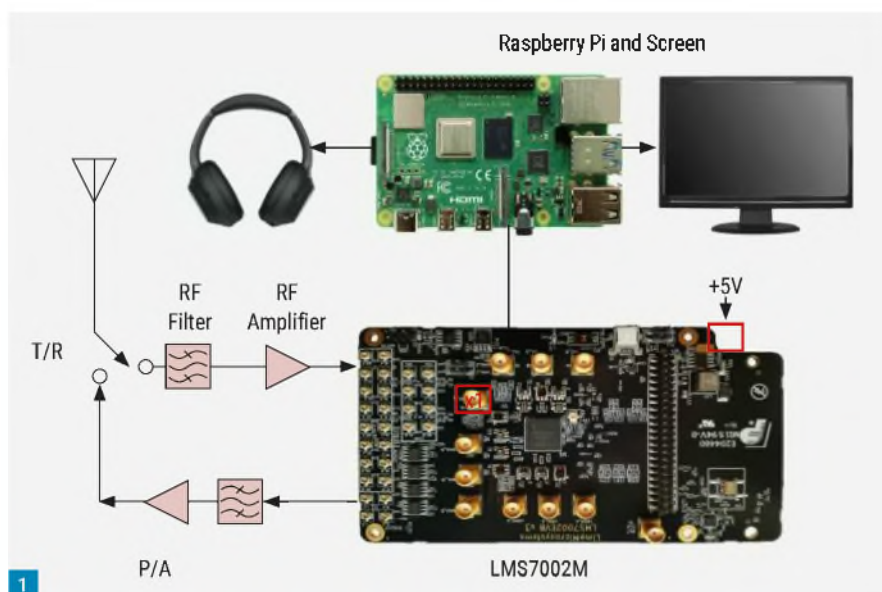


Fig. 1: Concept for a 2m SSB rig
(<https://tinyurl.com/y4nwyq6> (modified))

One clever chap even suggested doing an internet campaign to raise money for the development. He was cut off sharply when we discovered his real ambition was to be away with the funds to Saint Lucia! But I digress. So back to the challenge.

This is very much what A. Einstein used to call a thought experiment. For now anyway. There are lots and lots of component suppliers, and even of sub-systems suppliers out there. So, my plan is to sit down with a good book about designing radios and start from first principles. I'm also going to cheat a little, by looking at block diagrams of various radios. For, of course, the thing that makes this project viable is SDR technology, and the SDR chip sets are readily available. But I've leaped ahead.

Trivially, what I will need is a front end to capture VHF/UHF signals, which of course are analogue AC currents. I will then need a bit of filtering, and then convert these to digital form, and present these to a processor which will do all the demodulation. Take the output from this to

an audio processor, and finally an amplifier, and I'm done. Any questions? Stay awake at the back, as questions will be asked. Because here's the first question. Is this a good start for my design?

Well, yes, and no. As a concept block diagram, it will probably do for now. But more research will be needed. I can see one weakness already. This concept will need a computer to run the software.

And I don't want to lug a laptop with me when I am backpacking up Mount Snowdon. Then another surprise. Because there are very, very small computers available quite readily, which could be programmed to do what is needed. I've been told the CPU chips are available from you know where for £1 a dozen, or even cheaper.

But I don't think I want to design the computer processor for this. What about a Pi, or an Arduino, or similar. Now we're getting somewhere. Might have to learn Python, but so what.

A day later, and it's not as mad an idea as it sounded originally. But then, surely someone somewhere must have tried this already? Well, no; all I found were HF

transceivers, with 2m boards in them. Even the new rigs like the Xiegu, the Ailunce or Q900 (other possibilities exist as well). So, it's back to the design stage.

Now the search turned to the question of the SDR chip, or system, if you prefer. "Use a Lime SDR (small) or Pluto SDR (even smaller)", one correspondent said. Both those SDRs can receive and transmit anywhere from HF to a couple of gig, so would easily cover all the VHF and UHF bands. I spent a bit of time looking at what are in fact chipsets intended for the mobile phone industry. Many of these, like the LimeSDR and the Hermes Lite, are actually full specification transceivers, even if the output is only a few milliwatts. I settled on the LimeSDR for my design, because of a conversation with another radio amateur who had already used it for an Oscar 100 station, which seems to be a popular use for this chipset currently.

Coming Together

The supplier says that the LimeSDR is an open source SDR transceiver, covering 10MHz up to 3GHz, in full duplex. I was

warned by another operator that the lower frequency limit on some of the boards may be higher than the quoted specification, but that's for another day. Checking the Lime webpages was an interesting afternoon. It seems the Lime design philosophy is to put as many of the building blocks on the same chip as possible to make it easier and cheaper for developers. Therefore, I won't need to assemble so many individual sub-systems to get this done. This is what I now have, Fig. 1.

With this done, I really don't know where to go next. Any help would be appreciated. OK, I know that the Lime is expensive for what I want it to do so what would other people suggest?

And I'm not a welder – last time I tried I nearly burned a hole in the kitchen table putting solder on an audio plug. But I am convinced that my 'thought experiment' has, with help, achieved the first stage of an achievable design.

Based on this I believe that it would be possible to design and build an SSB 2m transceiver, lightweight and very portable. Anyone like to give it a go?

Practical Wireless 2020 Index (Continued from page 61)

Data Modes

Mike Richards G4WNC Jan 64, Feb 64, Mar 64, Apr 64, May 64, Jun 50, Jul 42, Aug 42, Sep 22, Oct 22, Nov 22, Dec 48

Doing it by Design

Gwyn Griffiths G3ZIL Jan 48
Eric Edwards GW8LJJ Mar 55, May 48, Jul 64, Sep 54, Nov 26

From the Ground Up

Eric Edwards GW8LJJ Aug 20, Oct 64, Dec 51

HF Highlights

Steve Telenius-Lowe PJ4DX (G4JVG) ... Jan 14, Feb 48, Mar 16, Apr 55, May 42, Jun 57, Jul 22, Aug 23, Sep 46, Oct 54, Nov 42, Dec 42

In the Shop

Harry Leeming G3LLL Feb 70, Apr 70, Jun 62, Aug 52, Oct 14, Dec 54

Kits & Modules

Geoff Theasby G8BML ... Feb 38, Mar 46, Apr 51, May 76, Jun 66, Aug 66, Oct 45, Dec 56

Making Waves

Steve White G3ZVW Jan 70, Mar 70, May 72, Jul 60, Sep 52, Nov 38

Morse Mode

Roger Cooke G3LDI Feb 24, Apr 34, Jun 24, Aug 18, Oct 62, Dec 38

Notes from a Small Station

Joe Chester M(W)1MWD Jan 67, Feb 67, Mar 67, Apr 18, May 34, Jun 60, Jul 62, Aug 55, Sep 58, Oct 60, Nov 52, Dec 63

Starting Over

Lee Aldridge G4EJB Jan 64, Feb 64, Mar 64, Apr 64, May 64, Jun 64, Aug 64, Sep 67, Oct 28

Technical for the Terrified

Don Field G3XTT Feb 54

Valve & Vintage

Bernard Nock G4BXD Jan 26, Mar 36, Jun 20
Dr Bruce Taylor HB9ANY Aug 45
John Seager G0UCP Feb 26
Michael Jones GW7BBY Apr 22, May 22
Michael Marinaro WN1M Jul 56
Ray Howes G4OWY Nov 58
Scott Caldwell Oct 32, Dec 46
Tony Smith G4FAI Sep 42

What Next?

Colin Redwood G6MXL Jan 61, Feb 60, Mar 52, Apr 52, May 52, Jun 54, Jul 46, Aug 32, Sep 32, Oct 32, Nov 32, Dec 32

World of VHF

Tim Kirby G4VXE Jan 34, Feb 34, Mar 28, Apr 28, May 58, Jun 26, Jul 26, Aug 26, Sep 26, Oct 26, Nov 18, Dec 22

Annual Contests & Results

The 11th PW 70MHz Contest Results, Colin Redwood G6MXL Feb 51
The 12th Practical Wireless 70MHz Contest, Colin Redwood G6MXL Sep 56
The 36th Annual PW 144MHz QRP Contest, Colin Redwood G6MXL Jun 18
2020 PW 144MHz QRP Contest Results, Colin Redwood G6MXL Dec 26

Read more radio news and reviews at www.radioenthusiast.co.uk/news

Practical Wireless Christmas Quiz

The answers to our Christmas Quiz on page 45

Part One: Radio People

A1. He is an actor: VU2AMY is world famous 'Bollywood' film star **Amitabh Bachchan**, pictured in Fig. 5. (1 point)

A2. **Steve Franke K9AN**. (1 point)

A3. **Joe Walsh**, the guitarist and singer formerly in The Eagles rock group (Fig. 6). (1 point)

A4. Senator **Barry Goldwater K7UGA**, Fig. 7 (he lost to President Lyndon B Johnson in 1964). (1 point)

A5. With **Guglielmo Marconi**, in 1909. They were awarded the prize jointly "for their contributions to the development of wireless telegraphy" (yet who has ever heard of poor old Braun?) (1 point)

A6. **Sir Hiram Maxim's** son was **Hiram Percy Maxim** who co-founded the American Radio Relay League (ARRL) in 1914. (Sir Hiram was American-born but emigrated to Great Britain and became a naturalised British citizen.) (1 point)

A7. **Alexander Graham Bell**, Fig. 8, inventor of the telephone. (1 point)

A8. Frequency hopping or spread spectrum radio. During WWII **Hedy Lamarr** and **George Antheil** together developed a frequency-hopping spread spectrum technique designed to prevent jamming of radio-controlled torpedoes. The frequency-hopping 'Secret Communication System' was patented by them in 1941. (1 point)

A9. **Feargal Sharkey, OBE**, lead singer of The Undertones and solo performer of 1985 hit *A Good Heart*. (1 point)

A10. **SWL Geoff Watts**. (1 point)

Part Two: General

A11. **MGY**. (1 point)

A12. (a) Collins: the 30L-1 was a 1kW input linear amplifier and the KWM-2 a transceiver. (b) KW Electronics: the Vanguard was an AM / CW transmitter and the Viceroy an SSB / CW transmitter. (c) Drake (R L Drake Company): The T-4XC and R-4C, were a top of the range transmitter and receiver respectively and could be operated together as if a transceiver. (d) Heathkit: the DX-100 was a 100+ watt AM / CW transmitter and the HW-101 an SSB / CW transceiver. (e) Codar: the AT5 was a 10W 160 / 80m AM / CW transmitter and the T28 a matching receiver (they were often used for 160m mobile operating in the UK in the 1960s and early '70s). (5 points)



5



6



7



8

Fig. 5: Amitabh Bachchan (Studio Harcourt, Wikipedia, CB by 3.0) Fig. 6: Joe Walsh WB6ACU (LuckyLouie, Wikipedia) Fig. 7: Senator Barry Goldwater K7UGA. Fig. 8: Alexander Graham Bell.

A13. (a) Australia, (b) Bosnia-Herzegovina, (c) Switzerland, (d) Belgium, (e) Brazil. (5 points)

A14. They're all used by the NCDXF / IARU International Beacon Project. (1 point)

A15. Automatic Packet Reporting System (and not Automatic Position Reporting System). (1 point)

A16. Astonishingly, the answer is (e) 680 million (if you don't yet use it, take a look at <https://clublog.org>) (1 point)

A17. They are all in their country's second call district (VK2, W2, OH2, VE2, SM2, ZL2, UA2). (1 point)

A18. (a) August. (b) April. (c) October. (d) July. (e) October. (5 points)

A19. (a) 60 - 90km, (b) 90 - 150km, (c) 150 - 500km (any figure within these limits count for points). (3 points)

A20. (a) MM7XYZ, (b) SM0XYZ, (c) W2XYZ (despite still having 'call districts', US amateurs do not change their callsign when moving from one district to another. W2XYZ may sign W2XYZ/6 from California, but this is not mandatory.) (3 points)

Maximum possible: 36 points.

Radio Round-up



JUSTIN FROM ICOM: The AL-705 is a new, versatile portable magnetic loop antenna from Alpha Antenna. As part of a special agreement with Icom, the AL-705 is now an official partner product for Icom's new IC-705.

The AL-705 operates on the 10 to 40m bands. The antenna's compact design allows it to be stored in the lower section of the LC-192 backpack for easy storage and transportation. Once deployed, the antenna's maximum diameter of 26.5in or just over 67.3cm, means it is easy to manipulate and mount conveniently wherever needed.

Maximum power handling is 20W SSB, 10W CW & Digital. The AL-705 comes with 15ft/4.57m of feedline, with BNC and PL-259 connectors. The AL-705 will be available for sale from authorised Icom amateur radio dealers from November.

KING OF THAILAND LICENSED: The call sign HS10A was granted on September 24th to Thailand's King Vajiralongkorn. National telecoms regulator NBTC and RAST, the national amateur radio society, presented the Advanced-class license and amateur radio equipment, including HF and VHF/UHF transceivers, antennas, and peripherals.

SPECTRE SPEECH INVERTER: Ron G4GXO reports, "I have finally got around to creating a GitHub account and have posted the schematics, PCB layouts and source code for the Spectre speech inverter, (described in PW January 2019). The files are found here":

<https://github.com/G4GXO/Spectre>

ATTENDED PROPAGATION BEACON: Geoff M1EDF reports that his new Propagation Beacon is complete and tested. The message is M1EDF space UK repeating every 10 seconds at a power of 25W daily, and attended in accordance with the rules.

Transmission will be spasmodic but as a guide, the times of transmission and frequencies will be as follows: Monday and Tuesday 3.545kHz from 7am until 11am, Wed and Thursday 7.035kHz from 7am until 1100am, Friday and Sat 10.129kHz from 7am until 11am. Note that the beacon will check that the frequency is clear before operating.

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Specialist Dealers

Antennas

Bantenna.co.uk

Amazing sleeve portable vertical HF antenna

160m – 10m, 100w, no radials or counterpoises. Also endfed, 80m-10m. QRP and 100w versions.

www.Bantenna.co.uk
info@bantenna.co.uk

Insurance

South West Broking Ltd

HAM RADIO INSURANCE

Call **01454 806503** or
www.southwestbroking.co.uk
enquiries@southwestbroking.co.uk

Appointed Representative of PSP Insurance and Financial Solutions Ltd
Authorised and Regulated by the Financial Conduct Authority. Number 303481

Kit Suppliers



Phoenix Kits

Kits for the Radio Enthusiast

A wide range of low cost but High Quality Kits with a leaning towards CW and QRP enthusiasts.

Some of the Kits from our range:-

Morse Tutors, Magic Eye Tuning Indicator, Keyers, Dummy loads, Practice Oscillators, Flat Pack CW Key, and many more....

www.PhoenixKitsOnline.co.uk
sales@phoenixkitsonline.co.uk

Mid Glamorgan

SANDPIPER AERIAL TECHNOLOGY

Unit 5, Enterprise House
Cwmnach Industrial Estate, Aberdare
Mid Glamorgan CF44 0AE

Tel: (01685) 870425 Fax: (01685) 876104

A full range of transmitting & receiving antennas available for the amateur commercial market.

www.sandpiperaerials.co.uk
e-mail: sales@sandpiperaerials.co.uk

Scotland



Radio Masts | Masts | Mast Climbers | Towers

A complete range of Multi purpose Masts
The best of Scottish engineering!

Tel: 01505 503824
www.tennamast.com
sales@tennamast.com

Somerset

LINDARS RADIOS

'A Modern Company With Old Fashioned Values'

USED AMATEUR RADIO EQUIPMENT
PURCHASED AND SOLD
www.AmateurRadioSales.co.uk

01935 474265

Suffolk

www.itender.co

Monthly communications tenders!

Ex Police Service

General comms company stock

Contact: 07788 498962

TOP PRICES PAID FOR ALL YOUR VALVES, TUBES, SEMI-CONDUCTORS AND ICs.



Langrex
IMPORTERS ELECTRONICS

Unit 4, Dore Road, Billingshurst, West Sussex BN14 9SJ
Tel: 01403 785600 Fax: 01403 785656

www.langrex.co.uk



SCAN HERE TO GO TO OUR WEBSITE

SCAN HERE TO GO TO OUR WEBSITE

Classified Adverts

For Sale

MICROPHONES & ACCESSORIES
Replacement microphones for a wide range of transceivers. Cables for Heil and studio microphones, headsets and mixers, PC headset adapters, microphone extension cables, PTT switches and replacement curly cords. DTMF microphones for echolink. For these and more great items go to technofix.uk or www.technofix.co.uk

CTCSS ENCODER AND DECODER KITS. DTMF kits and modules. Pic development kits. [https://cstech.co.uk](http://cstech.co.uk)

Valves

VALVES & ALLIED COMPONENTS
in stock Ring for free list. Valves/books/magazines wanted.
Geoff Davies (Radio).
Telephone: 01788 574774

Wanted

VINTAGE FIREWORK COLLECTOR.
Do not light the blue touch paper and burn British Heritage, private collector will pay cash and collect from anywhere, licensed explosive storage.
Call Tony on 07956 506300

Repairs

REPAIRS TO RECEIVERS, TRANSMITTERS ETC. New/old, valve/transistor. Call 07903 023437 for details. www.kent-rigs.co.uk

To advertise in Practical Wireless

Contact Kristina Green
Telephone 01778 392096
kristina.green@warnersgroup.co.uk

Bargain Basement

For Sale

TEKTRONIX 7834 400MHz storage oscilloscope GWO with about 50 plugins, many original manuals £499. 7L12 spectrum analyser plugin £350. Tektronix 500 systems with some plugins £50. Inspect and collect.
Terry, MOCLH: 07842 812188 or email: moclh@tiscali.co.uk (Wantage Oxon)

TECSUN PL360 as new £30. Roberts R9995 AM/FM pocket radio, mint condition £20.
Bush TR82 replica GC/GWO £25.
Contact Adrian on 07542 873604

RADIO BYGONES magazines, near mint condition in binders. All 163 issues. Offers please. Cash/collect. John (G8BXO):
01769 573382, G8BXO@john@gmail.com

AVO MK4 Valve Tester. Excellent condition with working instructions and books. Buyer collects. £650 Unfinished project. Decca amp 5L63 1.U52. 3 missing valves. Buyer collects. £50. Tel: 01353 663362 (Ely, Cambs)

ALINCO DX-R8E communications receiver, 150KHz to 35MHz VGO GWO. Original box, instruction manual, schematic diagram, new power cord. £360.00, free postage.
Phone Ray on 01944 710232, or
Email: hypnoshift313@gmail.com

MEJ-941E manual tuner with meter. (300W) 1.8 to 30MHz. As new condition, GWO. Original box. £150.00, free postage.
Phone Ray on 01944 710232, or
Email: hypnoshift313@gmail.com

AOR DV10 in mint condition, 2 months old, Original box, manual, and contents. £675.
Email: dmscast@gmail.com

Wanted

JRC 245 TRANSCEIVER. Tel 01642 470623 or Email: jim.shewan@ntlworld.com

RACAL RA137A & RA63A ADAPTORS
Required, will pay sensible amount for good items. Please Call Stewart: 01692 615930 (Norfolk)

CIRCUIT DIAGRAM and parts list for electronic doorbell as per Smithy and Dick in late 70s or early 80s Radio Constructor magazine. Photocopy or magazine. All costs paid. Phone: 01875853144 or Email: eck.radio@hotmail.co.uk

Bargain Basement adverts cost just £5.00

BY EMAIL Firstly email your advert's wording to kristina.green@warnersgroup.co.uk and then call 01778 392096 to make your payment. **BY POST** Send your advert to: Bargain Basement, Warners Group Publications plc, West Street, Bournemouth, Dorset, BH10 9PH. Please write your advert in BLOCK CAPITALS up to 30 words, plus 12 words for your contact details and send it together with your payment of £5 (subscribers can place their advert free of charge as long as they provide their sub number or mailing label). Cheques should be made payable to Warners Group Publications plc, credit card payments also accepted. Any advert which contains ?? marks indicates that the advertising dept. could not read/interpret the wording. Advertisements from traders or for equipment that it is illegal to possess, use or which cannot be licensed in the UK, will not be accepted. No responsibility will be taken for errors and no correspondence will be entered into on any decision taken on any of these conditions. The Publishers of Practical Wireless also wish to point out that it is the responsibility of the buyer to ascertain the suitability of goods offered for purchase.

DISCLAIMER Some of the products offered for sale in advertisements in this magazine may have been obtained from abroad or from unauthorised sources. Practical Wireless advises readers contemplating mail order to enquire whether the products are suitable for use in the UK and have full after-sales back-up available. The publishers of Practical Wireless wish to point out that it is the responsibility of readers to ascertain the legality or otherwise of items offered for sale by advertisers in this magazine.

Your Letters

Send your letters to: Practical Wireless Letters, Warners Group Publications plc West Street, Bourne, Lincs PE10 9PH
E-mail: practicalwireless@warnersgroup.co.uk

★ Star Letter ★

The Star Letter will receive a voucher worth £20 to spend on items from our Book Store, or other services offered by Practical Wireless

Morse is Dead?

Dear Don,

I was quite saddened to read **Edward Martin's** letter 'Morse is Dead' published in the November 2020 edition of *PW*. Rather than lament the loss of 'real Morse' sent by 'real operators' using only straight keys, I prefer to look at things a bit differently.

I see amateur radio as the last happy refuge of Morse code communication. Were it not for what still must be a significant proportion of the amateur community, Morse really would have died several years ago when it ceased

to be used commercially. However, I'm extremely happy to report that Morse on the HF bands is alive and doing quite well.

As things stand, there are very few occasions when I fail to find someone to have a CW QSO with on one of the amateur bands if I want one. I often meet people just starting out using CW and am always more than happy to drop my speed and offer as much encouragement as I can.

I'm certain that nearly every other more experienced amateur does the same. Does it really matter what type of Morse

key a person uses as long as they use one? Well-sent Morse on a paddle key can still be a pleasure to listen to, just as poorly sent Morse on a straight key can be horrible.

I've heard it all before, multiple times. Back in the day, some AM operators were of the opinion that SSB would kill amateur radio. The change from a written RAE to multiple-choice exams certainly heralded the end. The internet was definitely going to do it and if it didn't, the loss of the Morse test would for sure. And the introduction of a Novice licence was like poison for the hobby.

I believe that Morse will always be an integral part of amateur radio for many operators and (paraphrasing **Mark Twain**) reports of its impending death are greatly exaggerated.

Mark Godden G0ACQ
Portland

Dear Don,

I cannot help but feel **Edward Martin's** letter 'Morse is dead' was penned a little tongue-in-cheek, knowing fine well the can of worms such a missive would open.

He is correct to point out machine Morse is soulless, and that such a mode is not necessarily progress.

Where the point goes awry however is firstly that straight key Morse is better somehow than a paddle. It is indeed a skill, but I have heard some lousy Morse sent by fist pumpers. There is a tendency for instance for straight keyers to extend the da, and just as some paddle users do, insist on rolling letters together, CQ for instance becoming one long string of characters, joined together without a gap between them.

I would not send Morse without my trusty paddle keyer. That way I can improve the characters I send for the recipient to decode more easily. Equally I will not use a keyboard and screen.

In addition, we know a carrier wave can get places a microphone cannot. This is another reason for the mode to persist.

To lump paddles in with keyboards and

screens is disingenuous. The recipient using the paddle still has to decode the incoming message. Receiving and decoding the signal is a skill in itself, probably a greater skill than sending.

As for using hacksaw blades on a piece of wood, well, that's just cheating surely. Let's just use two bits of wire, presumably sent on a cat's whisker.

I would get out more, but this COVID thing has me glued to the radio.

Thanks for a great magazine.

Richard Baker G0AIH
Darlington

Dear Don,

I read with interest the letter by M5UF and to a point I totally agree. However, in the early 60s I met G3JRE in Malta who had designed a keyer using micro-logic ICs with auto character spacing. I built one and used it for several years, and was glad I did so because in 1974 while serving on *HMS Hermes* the Turks invaded Cyprus, ex-pats wanted relatives to know they were safe so telegrams were sent by myself and the late G3JFF direct to Portishead Radio (over 1,000 between

us). I never did meet the guys on the other end (No wrist ache either).

I have never used a straight key since, apart from my test at Portishead, and don't intend to, but I have respect for those who do.

'Mac' McPheat G4OEC
Holford, Somerset

Entry to the Hobby

Dear Don,

You ask about barriers to entry to amateur radio but, as someone who has been studying since 1978 (not full time!) I may be able to shed a light on some of the issues.

OK, there is an exam. If you don't want to do an exam, you can always get a CB. I think the exam does give a civilised nature to enthusiasts. Your point about jargon, though, is agreed. Arguably this is contra to the licence conditions!

The main issue I have had over the years is booking the exams – online invigilation has sorted this – hopefully! Before, you had to fit into someone else's schedule, which rarely fit mine.

Sign up to our FREE email newsletter at www.radioenthusiast.co.uk

Then there is the practical – forcing people to spend two days with others is not my cup of tea.

But then there is the syllabus – with a handheld on the front of the Foundation Licence Manual. But the training does not give any indication of an ideal first setup. So, I got a handheld, and in the first day had one contact. I am convinced I need a better antenna but have you tried finding a 2m antenna? Ideally, I want to listen but the barrier is crazy.

So, what about listening – I may as well not go there. The receivers cost as much as the transceivers.

Do I go handheld, 144/430MHz, or full base. So, the pricing is £29 to £2,900 plus.

It is more than the syllabus – you really have to know a lot or know someone to get into this hobby.

Ross McManus
Derby

Dear Don,

I must agree with your conclusions regarding the Foundation Licence in October's issue. I am an Intermediate Licence holder who passed the exam in the first round of the new syllabus of November last year. I would really like to progress to the Full but I know my limitations as regards the technical aspects of the exam so will not be able to progress any further.

Maybe there is a case for a Full Operators Licence whereby you can use your modern equipment. I have no intention or desire to take the lid off a radio, I just want to communicate with other like-minded amateurs around the world and not delve into the innards of the equipment. Today's radios (mine is an Icom IC-7300) will be sent back to manufacturers for repairs. This is 2020 after all.

Adam Wake 2E0NVL
Wareham, Dorset

Dear Don,

Re *Keylines, Foundation Licence PW*, October 2020. Rarely am I prompted to put pen to paper, but I felt some of your remarks in the above required comments.

Questioning your need for the Foundation Licence to require only the most basic knowledge of certain technical facts and comparing the activity to that of driving a car without knowing how a car works. A driver would quickly learn, perhaps painfully, the consequences of driving anywhere on the road he chose, or at any speed.

Whereas, an amateur radio operator transmitting on any frequency or power of his choice could, without being aware, seriously endanger life. An example being that some of the early cheap Far Eastern handhelds transmitted spurious signals on civil Air Traffic Control frequencies near an airport. With no requirements for technical expertise, the Foundation operators had no idea that was happening until the authorities identified it.

From experience, I challenge the remarks about railway modelling costs, which can be even more costly than simple amateur radio equipment. Also, the railway modeller is unlikely to cause any interference to public systems outside his model installation. Therefore, why would he require any licence to operate in the same way as a radio amateur? There is no comparison in the two hobbies for this reason.

Your comment that a pass of 19 out of 26 questions should warrant a Distinguished Pass. Having taken many professional and recreational examinations over the years, I have yet to see a Distinction Pass awarded for a 73% pass! That is normally reserved for a 98-100% pass. Distinction is defined as being of 'special honour, recognition, achievement or fame'. Another example of how our world now accepts declining standards, perhaps?

All due respect for a 10 year-old passing the Foundation Licence examination, but our hobby is not simply buying a transceiver and just operating it. That can be done without examination on CB Radio. A 10 year-old simply hasn't been on this planet long enough to acquire much in-depth experience or knowledge of the many facets of amateur radio operating or technicalities in our 'self training of the operator'.

John Lockwood G3XLL
Norfolk

Dear Don,

I've tried holding back on the Foundation exam debate, but can't any longer.

My daughter passed her Foundation exam three years ago on the second attempt, aged eleven. What made the difference for the successful attempt was the ability of the instructors at the Dragon ARC, North Wales, themselves to make the taught material much more easily understood.

For example, the 'inverse square law' was made infinitely less intimidating by an instructor asking, as he walked away,

making a humming noise, whether he was getting louder or quieter. That kind of thing sticks much more easily in all our minds, let alone a youngster's. But even though the lesson material can be made more accessible, the exam wording continues to be criticised as needlessly stuffy by many.

Very few of us build a transceiver from the ground up these days, not always because we couldn't do it, but because there is no real need to do so. It's no longer the 1930s where you scavenged bits and bobs and made a radio out of them. We mustn't hold the future ransom to nostalgia. Almost all of us now simply buy a radio and use it. Of course, people who want to build radios can and will, and absolutely deserve every encouragement.

The distance learning course I took was very well presented, but it was the most boring thing I'd ever studied, and many say the same thing about courses today. All I wanted to do was speak to other people, far away. If my radio broke I would, then as now, take it to someone who knew what they were doing.

There was never any point in me pretending that working as a microbiologist would make me somehow equally skilled at fixing radios as someone who did that particular job all day, every day.

Amateur radio is not a professional career. But it has often traditionally been a blend of what people or their fathers did 'in the war', or 'in their day job', and what they did in their spare time. That's why there was quite a bit of snobbishness in the hobby, and why people who had passed a full C&G exam on radio theory were nevertheless blocked from using the HF bands, simply because they had not also passed a CW course. It was a flagrant attempt to keep things 'the way they had always been', and a way to preserve the bands for those who considered themselves a cut above the new intake. That attitude did amateur radio a huge amount of entirely avoidable damage up until it was changed due to external forces as the 20th century closed.

It strikes me that we need to get our priorities straight. Above all, we need more people to join, regardless of age or aims in the radio hobby. If they fall out of the equation, there is no point arguing about exam content or what people can and can't do with radios – nobody will be there to take any interest! We need to make exams a lot friendlier,

accepting that the hobby has, for a long time now, ceased to be the natural hobby progression for people who were often professional electronics and communications workers. Very few of us are 'GCHQ families' (G8PMA in *Letters*, November 2020), so that path to radio, where the subject is always somewhere in the background already, is not really there any more.

For my money, a good Beginners' Licence should focus, above all, on considerate operating, with almost all the electrical theory held back until the Intermediate and Full courses and exams. In support of that argument, just turn on your rig and see how long it is before someone with a Full licence and years of experience operates contrary to law or convention. A few minutes is all it will take...

John Rowlands MW1CFN
Anglesey

Dear Don,

I wish to give my opinion to your nice piece in *Keylines* about the Foundation Licence. You are totally right. I agree 100% with your arguments even though I am 70 years old, as probably 80% of your readers are. Even I have known the difficult times most of us, elderly now, had in the last 50 years to get a licence and nice rigs/accessories. I think we should forget those times immediately after the war, where we indeed had to make by ourselves and experiment with mistakes and success some mysterious propagation and material. If somebody feels he likes radio, whether HF, VHF or UHF, let him experiment in a club or on his own, and give the girl or guy the licence after six months experimenting, after a short exam in front of experienced amateur radio operators on how to handle material, rig, antenna and connexions. Most of them usually came from CB and will know. Give them a licence with 100W (as most rigs offer 100W) and let them go and make our frequencies alive again because nowadays 70% of transmissions are digital.

Etienne Vrebos OS8D/ON8DN
Belgium

(Editor's comment: I certainly seem to have stirred up plenty of emotion as a result of that particular editorial, both for and against. I imagine most readers will stick with whatever opinion they held at the outset so I suggest we now give this one a rest!)

An Error Corrected

Dear Don,

I have just been reading October's *PW* and can see an error in **Tony Jones'** explanation of the operation in Fig. 3. He states that C1 starts to charge via R2. This should read as R3. This could be confusing to a newcomer to electronics. Also, in Fig. 6 the capacitor mentioned in the text as C1 is not marked, going to pin 2 of the LM324 circuit. This is in no way a criticism to Mr Jones as it was an excellent article.

David Pentin G1ZEW
Merseyside

(Editor's comment: Well spotted, David. Tony agrees that this slipped through the net and I am happy to carry your correction.)

Weather Watching

Dear Don,

The feature on *Weather Watching and Radio* by **Georg Wiessela** in the October issue contained so much useful information most of us will be working on it for months to come. Checking out the links alone will keep me busy for many a rainy day.

However, there was one minor glitch in the text when he referred to Volmet as being a 'portfolio' word. What he meant was 'portmanteau' word (first referred to as such by **Lewis Carroll** in *Through the Looking Glass* when explaining 'mimsy' and 'slithy').

Colin Hall GM4JPZ
Dundee

Mains Supplies

Dear Don,

Referring to *Letters* of November 2020.

I believe the American mains feed to a USA house is a 230V volt Bi-phase (centre tapped) supply to provide two 115V supplies to the home from the transformer on the pole in the street.

Cookers, water heaters and other appliances that take a lot of current are wired across the 230 volts supply.

I think that information came from a *Television* magazine item years ago.

I did like your story about the HR joint on the pole. Which reminded me of another story in the *Television* magazine about a TV repair man who replaced the timer clock in his VCR, which had the clock motor winding burnt out. The replacement clock that he fitted had a similar fate.

One night going to the bathroom and turning the light on, the light was super bright! Being a television repair man, he measured the mains voltage as Very High! The reason being that the neutral connection at the substation transformer had become disconnected and the three phases were floating.

During the day the phases were loaded equally, balanced, so the voltage to his home was OK. During the night (less load on his supply) the phases were not balanced. The voltage to his home was high enough to overload the clock winding.

John Ashmore G8GXF
Wolverhampton

QSLing

Dear Don,

I just had to write. I was licensed in 1981 and operated HF/VHF until I left the hobby in 1986 (abandoning my equipment and records, including QSL cards, many of which I would be proud to display now). I was persuaded by a long-term friend, G4VHL, to return to the hobby in mid-2017 and what a shock was in store for me. The technical advances and superb equipment on the market just overwhelmed me. A lot of new good friends rallied around and got me up and running again. Fortunately, I was able to resurrect my original callsign and without a fee.

Another big shock, apart from the apparent relaxing of rules and regulations, was the deterioration in operating skills and general good manners on the air, which left a lot to be desired (in my mind anyway). I was military trained and am, I expect, rather over-critical and no doubt I will be told that by your readers.

I wondered whatever happened to the 'ultimate courtesy', the good old QSL card? LoTW and eQSL seem to have taken over and the question must be whether or not you will get the same satisfaction from these electronic facilities, as you will when you are holding that precious paper QSL? I have heard the comment "we don't bother any more - too expensive and time consuming". Not so, say I. Joining your national society and availing yourself of the QSL bureau does not cost the earth - probably less than you would spend on a night out or two with the boys (or girls). QSL card printing these days will not break the bank and if you have a logging programme that will print out contact details on adhesive slips, it is not going to

tax your energy that much. From my SWL days to the date I gave up the hobby, QSL cards were the most important thing to drop through my letterbox and still are.

Stephen Reading G4LZD
Dartmouth

Resistors

Dear Don,

Reading **GW8LJJ's** article *Resistors and Resistance* inspires me to write some comments.

The first statement to attract my attention was the suggestion that the rating of a resistor is that below the point it burns up. Not so. Long before that point, it will become unreliable, its value changing, usually increasing, to the point where it will impair or prevent operation of the equipment in which it is fitted. For some resistors, to further illustrate the point, makers state two ratings: for normal operation or precision operation. A case from a catalogue being 0.25W or 0.125W.

An explanation of the way values are chosen was needed, as they may well seem odd to the uninitiated. They are chosen so the high end of one value's tolerance range does not overlap the lower end of the value above.

For example, a 10 Ω 20% resistor can be between 8 Ω and 12 Ω . Therefore, in the E6 series, there is no 8.2 Ω , as it would overlap the 10 Ω , as the range is 6.56 Ω to 9.84 Ω . As the tolerance is reduced, there are more values.

It may have been clear, but was not stated that the E values are the number between decades. Some values in the higher ranges are not the same as in the lower. For example, 6.8 Ω becomes 6.81 Ω , though you may think this is rather pedantic.

The E series applies to capacitors too, but as it is harder to make them to close tolerance, most values are not generally available. Electrolytic caps vary so much with time, applied voltage and aging that trying to have close-tolerance would, in any case, be futile.

It further needs to be understood that these values are what the maker guarantees were true at the time of manufacture, not what they may be by the time they get to you. They will drift with storage, and when soldered, and then with further time and with dissipation. Normally you can forget all of this, but not in precision applications. The maker's datasheet will have all this information,

but we rarely bother, or even think about these things when using them.

There are those who when 'renovating' equipment fail to understand the above: and change lots of resistors even if they are in tolerance, because they seem to think what they measure should be what is on the markings. The late **Chas Miller** of *Radiophile* fame labelled this 'CCCD' – Compulsive Component Changing Disorder. You need to understand tolerance, and what is important in a circuit, which will normally work fine with components well outside their initial tolerance, but some are more important.

The article states always replace like with like. This is not necessarily true. Often you may find a resistor that ran very hot, not because of a fault, but because the maker used too low a wattage for economy. With modern resistors it is often the PCB that suffers, the resistor still being within tolerance.

The answer here is to use either a higher rated component or to stand it off the PCB, by either kinking its legs, or putting loops in them, or both.

Philip Moss

Corrosion in Antennas

Dear Don,

I was given a 50 MHz dipole last year and a few months ago 6m was open to Spain and Portugal at fantastic signal strengths. I called six stations but couldn't make contact. Something wrong here I thought, even with my 5W they should hear me.

The coax looked fine and not much can go wrong with a dipole, maybe corrosion at the gamma match. The SWR was good at first then increased a little after a short time. A simple RF meter showed RF present at the dipole.

I removed the SO239 socket to find corrosion underneath it, which I cleaned off, nothing wrong at the gamma match. After re-assembling it I checked with the RF meter and was pleased to see more RF coming off the dipole as indicated on the meter.

I wonder if this was why I had been given the dipole? Its performance on transmit had gone down and couldn't be explained. If you feel your antennas are not working like they used to, check everything for corrosion.

I've yet to work any distant stations but am confident it's working much better now.

Bill Kitchen G4GHB
Ashton under Lyne

More from Bob

Dear Don,

(Thought I knew all the contests but this one below I've only just discovered from 2017.)

RaDAR (Rapid Deployment of Amateur Radio) Originally called SIAS (Shack in a sack), this radiosport combines speed, a portable station and efficient communications. The operator picks a four-hour timeframe within which to operate and deploys his portable station as quickly as possible. Once deployed, the operator makes a maximum of five contacts, exchanging name, signal report and exact (8 digit or more) Maidenhead location digits. Once five contacts have been made, the operator packs up the station and moves it at least 1km on foot or 6km by car.

Other modes of transport are also used, each with its own minimal distance. The operator then deploys his station at the new location, makes five more contacts, packs up and moves again, until the four hours are up. The operator with the highest contact count at the end of the day, for his chosen four-hour period of operation, wins. (Source: *Wikipedia*)

Here at Verulam ARC St Albans we now have so many Covid-19 inspired links that I've put them all on just one web page via link below.

g4pvb.eu5.net/morse.htm

Possibly the most useful and timeless subject for amateur radio study is propagation. Valves, transistors, integrated circuits all come and go but propagation lives forever. Not only is it useful to study but it can be relatively easy to have a conversation about propagation with civilians as, after all, it is primarily about the sun of which we all have some understanding. **Steve Nichols G0KYA** presents his recent (April 2020) *Understanding HF Propagation* via the link below:

tinyurl.com/rjbkmsv

A big thank you to **David Seymour 2E0EYR** for americanradiohistory.com (Letters, June 2020). As I browsed the content it occurred to me that civilian internet has been available for some 26 years. We all know that websites come and go but maybe we don't all know about WayBack Machine Internet Archive. Websites as old as 21 years with text and GIF images are likely saved for... well, seemingly forever. So, if you're browsing past copies of *PW* and a web link is broken, then surf on over to the link below and search there:

Read more radio news and reviews at www.radioenthusiast.co.uk/news

<https://archive.org>

With the deepest respect to **Colin Redwood G6MXL** and his excellent article page 32 *PW* September 2020, I would be wary of using a car battery for hobby radio. Doing so could quickly ruin it beyond repair and your car won't start. Car batteries are designed for heavy starter motor discharge then immediate recharge.

Instead use a 20A gel-cell (no leakage) leisure deep-cycle battery as used by golfers for their carts. Many are changing to lighter lithium cells so ask politely at the pro shop and they will likely be delighted to offload free old batteries along with charger. I used to have one. It petered out at the 17th hole but after fitting a lower value fuse it was ideal for my previous humble Heathkit HW8 CW activity for a couple of years. Here are some leisure battery tips:

tinyurl.com/leisure-batteries

Bob Houlston G4PVB
St Albans

Morse Sounders

Dear Don,

To prove that [a] I am not yet a silent key and [b] that old dogs do know tricks, I comment on **Tony G7ETW's** article (*Morse Practice Oscillators*) in the November Issue.

A long time ago, but 'After Marconi' I belonged to the Vange club. One evening they decided to hold a construction contest. The test was to produce a circuit that made a noise in the fastest time, and the junk box was open.

While lots were scrabbling for transistors and the like, I wired a relay through its own Normally Closed contacts and, lo, a buzzer.

Should Tony G7ETW have included this in his article?

Alan Gordon G3XOI
Shoreham-by-Sea

Antenna Theory?

Dear Don,

Well done to you and those around you keeping *PW* rolling out. These last 6 months are an ongoing serious business and I missed a couple of issues as I bought my copies at the local newsagent. My daughter then bought me a subscription so I'm back on track. It is a hard balance. We want both the magazine and the local store to survive so I view this with quite mixed feelings.

Editorial is no doubt a pressure with fewer rallies, DXpeditions etc. to report on but it's good to have some 'practical' articles to read.

I think the newcomers and back to basics *What Next* pages are great for

the many ops returning to the hobby. I have been back about 15 months now and there are many more ops listed as returning so refreshers are good.

A lot of us I think will have taken the opportunity of summer months to build and experiment with antennas. The lost cost NanoVNA devices giving even more opportunity if you really know how to use them. With this in mind I am writing to suggest or ask for articles on balun making and using an analyser such as the NanoVNA.

There are articles and webpages out there but most dive straight into R, X, L with complex formulae without any refresh or necessary preliminary explanation of these terms, what they mean (in antenna terms) and how to use them when making or tuning an antenna. This is before we hit Smith Charts! Is there any possibility you have a good lead out there that could run a series on this subject area in *PW* for us please?

Wishing you and *PW* team the best.

Phil Cracknell G0KDT
Teignmouth

(Editor's comment: Thanks Phil for the kind comments. Yes, it would be nice to run one or more articles along the lines you suggest. I will do my best – any budding authors out there who fancy tackling this topic?)

Next Month

in the UK's best & only independent amateur radio magazine...



PRACTICAL WIRELESS

www.radioenthusiast.co.uk

OCTOBER 2020 THE UK'S NUMBER ONE AMATEUR RADIO MAGAZINE SINCE 1932

RESISTORS & RESISTANCE

A look at their many uses



YAESU TEST

We put the versatile FTM-300D transceiver through its paces

MORSE An update on CWops and more

BOW watch

Get Started!

Part three of our 'how-to' series

Rea

You

The publishers reserve the right to change content according to circumstances.

THE BAT RECEIVER: Tim Walford G3PCJ and Geoff Budden G3WZP describe a novel receiver to intercept ultrasonic communications.

REVIEW: Don G3XTT reviews two antennas from Moonraker, a W3EDP and a J-pole.

MAKING WAVES: Steve White G3ZVW looks at the characteristics of the different frequencies used by mobile phone operators.

DOING IT BY DESIGN: Eric Edwards GW8LJJ has a 3.5MHz to 14.35MHz direct conversion receiver.

VALVE & VINTAGE: Bernard Nock G4BXD is back with the latest from his museum, including a German fighter radio.

There are all your other regular columns too, including Notes from a Small Station, HF Highlights, World of VHF, What Next and Data Modes.

JANUARY 2021 ISSUE
ON SALE 10TH DECEMBER 2020
AT ALL GOOD NEWSAGENTS



ICOM

specifications

GENERAL

	Receiver	0.030-199.999 ^{**} , 400.000-470.000 ^{**}		
Frequency coverage ^{**} (Unit: MHz)	Transmitter	1.800-1.899	3.500-3.999	5.255-5.405 ^{**}
		7.000-7.300	10.100-10.150	14.000-14.350
		16.068-18.168	21.000-21.450	24.890-24.990
		28.000-29.700	50.000-54.000	144.000-148.000
		430.000-450.000		
Mode		USB, LSB, CW, RTTY, AM, DV, FM, WFM (Rtx only)		
No. of memory channels		500 regular (100 groups), 25 scan edges, 4 call (2 ch x 2 bands) channels		
Antenna connector		BNC connector (50 Ω)		
Power supply requirement		13.8 V DC ±15% (with external power supply) 7.4 V DC (with BP-272)		
Operating temperature range		-10°C to +60°C; +14°F to +140°F		
Frequency stability		Less than ± 0.5 ppm (-10°C to +60°C; 14°F to 140°F)		
Frequency resolution		1 Hz		
Current drain		13.8 V DC	7.4 V DC	
	TX (Max. power)	Less than 3 A (10 W)	Less than 2.5 A (5 W)	
	RX (Max. audio)	0.5 A (typical)	0.6 A (typical)	
	RX (Standby)	0.3 A (typical)	0.5 A (typical)	
Dimensions (WxHxD, projections not included)		200 x 83.5 x 82 mm; 7.9 x 3.3 x 3.2 in		
Weight (approximate)		1.1 kg; 2.4 lb (including BP-272)		

^{**} Showing the USA version. Varies according to the version.

^{**} Some frequency bands are not guaranteed.

TRANSMITTER

		13.8 V DC	7.4 V DC
Output power	SSB/CW/RTTY/AM/DV	0.1 - 10 W	0.1 - 5 W
	AM	0.025 - 2.5 W	0.025 - 1.25 W
Modulation system		SSB: Digital P.S.N. modulation, AM: Digital low power modulation FM: Digital Reactance modulation, DV: Digital GMSK modulation	
Spurious emissions		Less than -50 dB (HF), Less than -60 dB (50 MHz), Less than -60 dB (144/430/440 MHz)	
Carrier suppression		More than 50 dB	
Unwanted sideband		More than 50 dB	

RECEIVER

Receiver system	0.030-24.999 MHz	RF Direct Sampling			
	25 MHz and above	Down Conversion IF Sampling			
Intermediate frequencies	25 MHz and above: 38.85 MHz±0.5 MHz				
		0.500-1.799 MHz	1.800-29.999 MHz	50 MHz	144/430/440 MHz
Sensitivity (WPR Presamp ON, 80 MHz Presamp 2 On 144/430/440 MHz Presamp ON)	SSB/CW (10 dB S/N)	-	0.20 µV	0.15 µV	0.11 µV
	AM (10 dB S/N)	13.0 µV	2.0 µV	1.0 µV	1.0 µV
	FM (12 dB SINAD)	0.5 µV (28.000-29.700 MHz)	0.25 µV	0.25 µV	0.18 µV
	DV (1% BER/PN9)	1.0 µV (28.000-29.700 MHz)	0.63 µV	0.63 µV	0.35 µV
Selectivity (Filter: SHARP)		More than		Less than	
	SSB (BW=2.4 kHz)	2.4 kHz/-6 dB		3.4 kHz/-40 dB	
	CW (BW=500 Hz)	500 Hz/-6 dB		700 Hz/-40 dB	
	RTTY (BW=500 Hz)	500 Hz/-6 dB		800 Hz/-40 dB	
	AM (BW=6 kHz)	6.0 kHz/-6 dB		10 kHz/-40 dB	
	FM (BW=15 kHz)	12.0 kHz/-6 dB		22 kHz/-40 dB	
	DV (12.5 kHz spacing)	Less than -50 dB			
Spurious and image rejection ratio (SSB/CW/AM/FM)		HF	More than 70 dB* (except for ADC aliasing)		
		50 MHz	More than 70 dB*		
		144 MHz	More than 65 dB		
		430 MHz	More than 54 dB		
* At intermediate frequency in 25-30 MHz or 50-54 MHz: More than 50 dB					
Audio output power	Internal SP	More than 530 mW (12 Ω load at 10% distortion)			
	External SP	More than 200 mW (8 Ω load at 10% distortion)			

All stated specifications are subject to change without notice or obligation

HF/50/144/440MHz MULTIMODE
PORTABLE TRANSCEIVER

IC-705

Now
available
from stock



THE ULTIMATE QRP RADIO?

Get a brand new Icom IC-705 today
for just £199 deposit & monthly
repayments of £39.96*

optional accessories

• mAT-705



• MP-705



• Prism 705 Cover



• BP-272 & BP-307



• LC-192



• MyDEL Tripod



• MyDEL QRAB Quick
release antenna bracket



• VS-3



Finance example:

Cost of IC-705: £1299.95

Deposit of £199.00 (card/cash/PayPal/Part-exchange)

36 x repayments of £39.96*

Total amount repayable: £1637.60

Credit subject to status and affordability. Terms & Conditions Apply. ML&S Martin Lynch and Sons Ltd. are a credit broker and are Authorised and Regulated by the Financial Conduct Authority. *19.9% APR.



Extend the standard 2 year Icom warranty to 5 years including parts & labour.
For more information see HamRadio.co.uk/Warranty

Don't Forget "Something for the Weekend" weekly newsletter & video on
www.MLandS.TV Subscribe today! See our home page.

YouTube

YouTube

MARTIN LYNCH & SONS LTD. THE WORLD FAMOUS HAM RADIO STORE

ML&S

www.HamRadio.co.uk

SAFE ONLINE SHOPPING. E&OE

0345 2300 599

Wessex House, Drake Avenue, Staines, Middlesex TW18 2AP

E-mail: sales@hamradio.co.uk

Opening Hours: Mon - Fri: 8.30am to 5pm. Sat: 9am to 4.30pm.

International Tel: +44 1932 567 333



FTDx101 TECHNICAL HIGHLIGHT-#5

MPVD (Multi-Purpose VFO Outer Dial)

ABI (Active Band Indicator)

Yaesu's accumulated HF Knowledge & Experience
delivers Superior User Operability

Important Operational functions such as VC-Tune can be viewed on the large 7" Display and adjusted using the high-grade aluminum MPVD knob's outer ring, without taking your hand off the VFO dial.

Other important RX function keys and controls are conveniently arranged around the VFO dial, making adjustments on the fly whilst searching for weak signals during pile-up operations entirely possible.

Band Selector keys with Active Band Indicator (ABI) LED for both Main and Sub band selection are arranged in horizontal rows above the main VFO dial allowing instant identification of the current band and selection for a desired band change.



HF/50MHz TRANSCEIVER
FTDx101MP 200W

HF/50MHz TRANSCEIVER
FTDx101D 100W



* Microphone M-1: Optional

More from us...

If you've enjoyed Practical Wireless here are six more magazines from us to try

THE LATEST NEW PRODUCTS
Hardware and software to enhance your hobby

RadioUser

October 2020 £4.00 www.radioenthusiast.co.uk

MICROPHONES Turning sound waves into electrical signals for over 100 years

RESCUE DRONES
How radio-controlled unmanned craft are revolutionising air and sea rescue

RadioUser
At the forefront of emerging trends in both broadcast and two-way radio.

GREAT VALUE BEST-SELLING MOTORHOMING MAGAZINE

MMM

THE MOTORHOMERS' MAGAZINE

COLOURFUL ADVENTURES
Dramatic Italy • Dog-friendly Norfolk • Spectacular Scotland
Unstable Normandy • Glorious Gloucester and Cheltenham
Perfect sites for winter getaways

END OF SEASON DEALS
Save over £14k off a new motorhome

TECHNICAL
Readers' questions answered
Make an A-class windscreen cover
Understanding dash warning lights

MMM
The Motorhomers' magazine packed full of inspiring motorhome travel features.

SWIFT & ERIBA
SIENA SUPER FB TOURING TROLL 530
ROCKABILLY QUEEN'S BIRTHDAY

Caravan

TOURING • CAMPSITES • TESTS • EVENTS • TECHNICAL

WRAP UP WARM
TOURS TO ENJOY ALL YEAR ROUND

TRAVEL
HIRE OF NIGHT
A family adventure
LONDON
Culture in the city
SUFFOLK
On the hunt for Great Britons

TECHNICAL ADVICE: KEEPING YOUR CARAVAN SAFE

Caravan
For new and experienced caravanners with top holiday ideas in the UK & overseas.

THE UK'S ONLY DIECAST MAGAZINE **MODEL PRICE GUIDE**
Latest auction results listed inside

DIECAST COLLECTOR

£4.99 (November 2020) (ISSN 0951-5727) www.diecast.co.uk

WIN A TRIO OF NEW CORGI VANGUARDS!

HIGH FLYERS

Marking 100 years of de Havilland, manufacturer of aircraft extraordinaire

PLUS
Racerall 5000GT
Matchless Superbike 44
Over 50 new models reviewed and detailed

Diecast Collector
The UK's only diecast model magazine featuring the latest news, releases & reviews.

THE SMILING SAMOYED

your dog

BRITAIN'S BEST-SELLING DOG MAGAZINE
November 2020 £4.99

DIGITAL EDITION

Get to know your dog better!
THE FREE WORK WAY

Your Dog
The perfect go-to guide for all loving dog owners filled with advice & expert tips.

WIN £1,250-WORTH OF GIVEAWAYS

Your Cat

DIGITAL EDITION

THE CATS OF WESTMINSTER
THE INSIDE STORY OF THE CATS OF BRITISH POLITICS

Your Cat
The must-have magazine for all cat lovers and cat owners alike.



Leave us a review

If you have enjoyed this magazine then do the next thing to shouting it from the rooftops and leave us a review instead! We all like to know when something is good and if something has been rated highly by others. Leave us a review to let others know what you think of Practical Wireless.