


SHORT WAVE
MAGAZINE

shortwave magazine

FREE INSIDE

16-page WHAT SCANNER MAGAZINE

REVIEWED THIS MONTH NRD-535 Communications Receiver

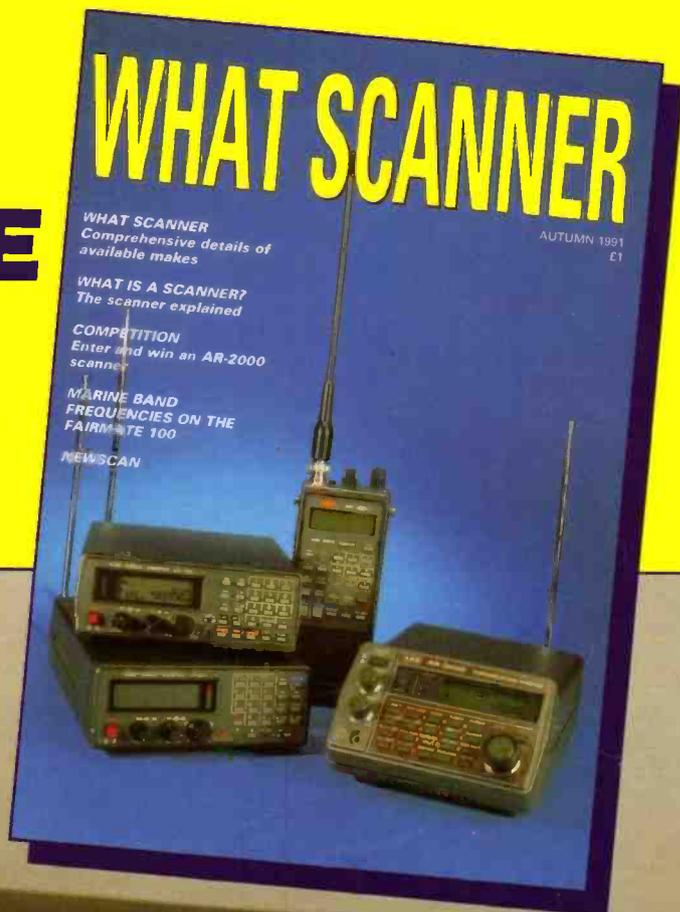

5XX WONDER STATION The Story of Daventry

SIMPLE RTTY TERMINAL UNIT Build This Simple Receive-Only Project

Regular Features for
Airband, Scanning, Junior Listeners,
SSB Utility Listening, Propagation and
Broadcast Enthusiasts

November 1991 £1.75 ISSN 0037 - 4261



NEVADA™

Extra Wideband Scanning Power New Models With Even More Facilities!

JUST RELEASED. NEW HP2000

Now with continuous coverage featuring a complete re-design and new p.c.b. layout

* Frequency coverage:- 500KHz - 1300MHz with no gaps

- * 1,000 channel memory
- * Receives AM - FM - Wideband FM
- * Search steps selectable from 5KHz to 995KHz
- * Keypad or rotary tune controls
- * Switchable 10dB attenuator

Each set is supplied with:-

- * Full set of high power NiCad rechargeable batteries
- * UK spec. charger
- * Three antennas - VHF, UHF, short wave telescopic
- * Carrying case, belt clip, shoulder strap
- * Dc cable for car cigar adaptor supply
- * Earpiece for private listening..... **£269**

NEW Nevada MS1000 Mobile/Base Scanner

An exciting new scanner with all the specifications of the HP200 above plus:-

- * Switchable audio squelch
- * Tape recorder output socket
- * Automatic tape recorder switching circuit switches tape recorder on when a signal is present
- * All metal case for improved EMC compatibility..... **£279**



Available From Authorised Dealers Throughout The UK.

Nevada Communications, 189 London Road, North End, Portsmouth. PO2 9AE

Send in £2 now for our LATEST CATALOGUE with full details of our complete product range (includes a £2 voucher).

**VOL. 49 ISSUE 11 NOVEMBER 1991
ON SALE OCTOBER 24**

(Next Issue on sale NOVEMBER 28)

EDITOR: Dick Ganderton, C. Eng., MIEE, G8V FH

ART EDITOR: Steve Hunt

NEWS & FEATURES: Elaine Richards G4LFM

TECHNICAL ARTIST/PHOTOGRAPHER: Rob Mackie

EDITORIAL

Enefco House, The Quay,

Poole, Dorset BH15 1PP

TEL: (0202) 678558

FAX: (0202) 666244

CREDIT CARD ORDERS: (0202) 665524

(Out of hours service by answering machine)

ADVERTISEMENT DEPARTMENT

ADVERTISEMENT MANAGER

Roger Hall G4TNT

TEL: 071-731 6222

FAX: 071-384 1031

ADVERTISEMENT PRODUCTION (Poole)

Marcia Brogan

TEL: (0202) 676033


FAX: (0202) 666244

© PW PUBLISHING LTD. 1991.

Copyright in all drawings, photographs and articles published in *Short Wave Magazine* is fully protected and reproduction or imitation in whole or in part is expressly forbidden. All reasonable precautions are taken by *Short Wave Magazine* to ensure that the advice and data given to our readers is reliable. We cannot however guarantee it and we cannot accept legal responsibility for it. Prices are those current as we go to press. *Short Wave Magazine* is published monthly for \$40 per year by PW Publishing Ltd., Enefco House, The Quay, Poole Dorset BH15 1PP. Second class postage paid at Middlesex, NJ. Postmaster: send address changes to C & C Mailers International, 40 Foxhall, Middlesex, NJ 08846.

contents

- 10** 5XX Wonder Station of the 1920s
Eric Westman
- 12** Educational Software for Basic Electronics – 9
J.T. Beaumont G3NGD
- 14** Improving Short Wave Broadcast Reception
R.A.W. Hill GM0IJF
- 16** Tuning in to the Secret Broadcasters – 2
Gerry L. Dexter
- 23** Switched Attenuators
Phil Townsend
- 27** 50 Countries on the 144MHz Band – 5
P.E.W. Allely GW3KJW
- 32** 2LO is Calling Again
Jack Hum G5UM
- 34** NRD-535 Communications Receiver
Mike Richards G4WNC
- 38** A Basic RTTY Receive-only Terminal Unit – 1
Bernard J. Greatrix G4ICZ

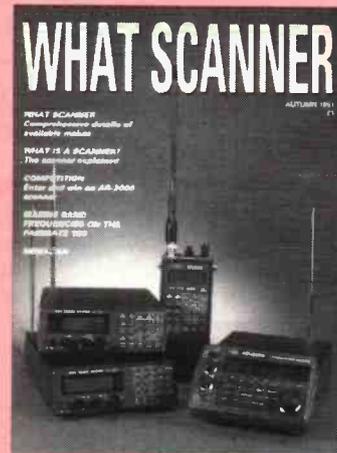

**16-page pull-out
What Scanner
magazine**

REGULARS

Cover: A new receiver from JRC is always of interest and this month Mike Richards has reviewed their latest offering - the NRD-535. Also inside is *What Scanner*, our annual look at this popular segment of the listening market.

short wave magazine

FREE INSIDE
16-page
WHAT SCANNER
MAGAZINE

REVIEWED THIS MONTH
NRD-535
Communications Receiver

SIX WONDER STATION
The Story of Denmark

SIMPLE RTTY TERMINAL UNIT
Build This Simple Receive-Only Project

Regular Features For
Airband, Scanning, Junior Listeners,
SSB Utility Listening, Propagation and
Broadcast Enthusiasts

- 51 Airband
- 48 Amateur Bands Round-up
- 44 Bandscan - USA
- 74 Book Service
- 54 Decode
- 49 DXTV Round-up
- 2 Editorial
- 4 Grassroots
- 57 Info in Orbit
- 76 Index to Advertisers
- 5 Junior Listener
- 2 Letters
- 61 Long Medium & Short
- 15 New Books
- 6 News
- 18 PCB Service
- 42 Propagation
- 18 RadioLine
- 7 Rallies
- 47 Satellite TV News
- 52 Scanning
- 2 Services
- 43 SSB Utility Listening
- 41 SWM Subscribers' Club
- 79 Trading Post
- 65 Watching Brief

...GOOD LISTENING

editorial

SWM SERVICES

Subscriptions

Subscriptions are available at £21 per annum to UK addresses £23 in Europe and £25 overseas. Subscription copies are despatched by Accelerated Surface Post outside Europe. Airmail rates for overseas subscriptions can be quoted on request. Joint subscriptions to both *Short Wave Magazine* and *Practical Wireless* are available at £34 (UK) £37 (Europe) and £39 (rest of world).

Components for SWM Projects

In general all components used in constructing *SWM* projects are available from a variety of component suppliers. Where special, or difficult to obtain, components are specified, a supplier will be quoted in the article.

The printed circuit boards for *SWM* projects are available from the *SWM* PCB Service.

Back Numbers and Binders

Limited stocks of most issues of *SWM* for the past five years are available at £1.80 each including P&P to addresses at home and overseas (by surface mail).

Binders, each taking one volume of the new style *SWM*, are available price £5.50 plus £1 P&P for one binder, £2 P&P for two or more, UK or overseas. Please state the year and volume number for which the binder is required. Prices include VAT where appropriate.

Orders for p.c.b.s, back numbers, binders and items from our Book Service should be sent to **PW Publishing Ltd., FREEPOST, Post Sales Department, Enefco House, The Quay, Poole, Dorset BH15 1PP**, with details of your credit card or a cheque or postal order payable to PW Publishing Ltd. Cheques with overseas orders must be drawn on a London Clearing Bank and in sterling.

Credit card orders (Access, Mastercard, Eurocard or Visa) are also welcome by telephone to Poole (0202) 665524. An answering machine will accept your order out of office hours.

The October issue of *Short Wave Magazine* was the largest ever produced. Including the free, pull-out *International Radio* magazine and the covers it totalled a massive 100 pages.

This month we have another bumper 100-page issue for you. Last November we produced the first *What Scanner* magazine and this month we have put together another issue for you. You will find it stapled into the centre of the issue.

In the coming months I have even better and brighter things planned for you. I intend to keep *SWM* the biggest and best radio enthusiasts magazine on the newsagents' shelves.



Radioline is *SWM*'s own weekly telephone information line giving you the latest news of radio happenings and rallies.

Since it started 100 weeks ago it has developed into a useful source of information.

Unfortunately Simon Spanswick's regular propagation report has had to be suspended temporarily, but a report for the DXTV enthusiast, provided by Tim Anderson, is now a regular feature. Full details on page 18.

letters

Dear Sir

Sitting at breakfast with my newly arrived copy of *SWM*, I turned to page 12. My Weetabix went soggy with fright and my tea turned cold on the spot! I re-read the feature on the future of short wave radio and still could not believe what I was reading.

As a young boy, I will recall the thrill of reading off those strange names from the dial and the three minute wait while the set warmed up. I sat for hours listening to the faint monotonous tones of what I now know was Shannon Volmet, wondering at the hissing and crackling sounds that came from out of the skies. Now I am told that all this may be a thing of the past.

I re-discovered short wave listening a couple of years ago and found that the thrill of tuning to a radio station from the other side of the world had not diminished over the years. Being that much older, I find it a challenge to try and get the best from my radio and antenna. I fiddle and alter, add bits and take bits away, much the same as a car enthusiast does with his engine. If I had

won the pools I doubt if I would have been more excited that the first time I winkled Alice Springs and Tennant Creek out of the æther.

The world of Ian McFarland struck terror in my heart! No more fading? No more co-channel interference? This is the very essence of s.w.l. coming under attack! What fun will there be in picking up digitalised super signals from a lump of solid state gubbins floating around in space? Will every radio signal now become 'DX' simply because it comes from thousands of miles above the earth?

Perhaps I am getting old, anachronistic and behind the times. Am I wrong in seeing s.w.l. as a challenge? I don't think so. I have a hobby that is absorbing, exciting and challenging. It is safe (barring lightning strikes), enjoyable, cheap and (as I keep telling the wife) keeps me out of the pub!

So come on s.w.l.s - let's start a 'Down with DBS' Group. Long live fading and co-channel interference!

**Ron Galliers
Islington**

Why is the Short Wave Magazine, Now at its very best? As each month we proudly - Read it, thus invest.

It suits the short wave listener - Around this monitoring nation. Not too technical; - informative! An excellent creation.

We!! The silent ones - no ticket to talk, So we have 'little' voice - We're not all born talkative - So listening is our choice.

So with a good antenna - And a good report as well - You'll always end up satisfied - With a welcomed QSL.

Anon 4-9-91

letters

Dear Sir

The letter from B J Priest, Clevedon referring to the RAF h.f. receiver R1084 used at base stations in WWII revived many memories.

In 1939 I was called up from the RAFVR to serve in the RAF as a Wireless Op/Mechanic and became acquainted with the R1084 within a few months of entry, on a 'Battle of Britain' fighter station. If my memory serves me right it had 13 valves, accessible via the heavy lift-up lid of the metal cabinet.

The answer to his question as to how we managed when the T1085/1190 transmitters drifted off frequency can best be summed up by saying 'with difficulty and patience, plus a couple of good ears'. On some shifts of duty I used to take c.w. messages from the Air Ministry. Other duties involved RT operating to the fighter aircraft (Spitfires/Hurricanes) and servicing the TRXs (Type TR9). In this connection I recall the introduction of a modification to prevent the pilot leaving his set on in the 'transmit' mode. It meant fixing a length of strong elasticated cord to the 'send/receive' lever so that it had to be held against tension when transmitting!

Later, moving into Bomber Command involved servicing RX1082 and TX1083 and later the R1154 and T1155 - of which good examples can be seen today at the Hall of Aviation in Southampton. Other receivers I used during my service on operational circuits were the Marconi CR100 and the American (RCA) AR88 and (National) HRO. Like the R1084 they were built to last and did a wonderful service both prior to, and after the war.

Although much later on I moved into higher echelons via Cranwell, I reckoned that those early days in the ranks were the most interesting and rewarding on many counts.

My amateur radio station (G3VD) was closed down by the authorities within days of the declaration of war and it was only in February this year that I had my old licence renewed. I am now looking forward to being active again on the h.f. amateur bands.

B.A. Pettit
Southampton

Dear Sir

I'll try and keep this as short as possible

Beware of the repair. I own a Trio R5000 receiver which went faulty early last year, brief description of symptoms....display going in line of dots and no signal strength reading on S-meter (it received Radio 4, etc!). Sometimes it would suddenly burst into life when it had been switched on an hour (not much use for instant logging). So last July, fed up with all this, I and the wife took it back to the dealer and explained the situation whereupon they kept it and after a month I got it back with a bill, but it was no better. So a fortnight later it went back again and again it came back no better. By this time I had been told there was nothing wrong with the receiver, yet my wife and friends had seen quite well what was happening. So off it went again and was away so long I threatened to have it back and send it back to Kenwood in Japan. So the dealer said they would contact them and in the meantime loan me another receiver as they could not find anything wrong with mine. But the receiver I was loaned was like comparing a moped with a Rolls! Anyway, by now it was Xmas and I decided one way or another I was going to have the 5000 back - repaired or not. So by the middle of January I had got it back - and you've guessed - the problem was still there, but I had to tell the dealer it was OK because they obviously were not going to repair it. So I sent back the loaned receiver and left it at that even though I was unhappy with the situation. So in six months I'd had the the receiver for just six weeks, got all sorts of paperwork saying what had been done to it and also travelled 300 miles in trips to and from the dealer to no avail.

By June this year the receiver was taking up to two hours or longer to come on - sometimes it would burst into life if it was thumped because by now I wasn't bothered as it was bin material and no use for the job it's got to do.

One Friday, at the start of July, one year on, the wife and I took our lives into our hands and removed the top to be confronted by something we knew nothing about. With the receiver on and a plastic knitting needle we touched all connectors in sight and pulled all the visible wires. Lo and behold we could make the receiver go on and off, signal strength wise, at will. Then, five minutes later, we suddenly realised what it was. On the front of the circuit board at the back of the display there are two miniature phono plugs and these were causing all the problems by not making circuit properly. So I pulled them out, sprayed them with Servisol and the receiver has worked like a dream ever since.

Ken Lancaster
Barnsley

Dear Sir

What are the BBC up to? I will try to be brief.

The long wave station closes for days, the m.w. band is being chopped and given over to advertising, the BBC has begun advertising. The BBC now runs a hype for the f.m. band which is actually untrue. As you know the international agreement is that stations should be in channels of 9kHz. In the m.w. band the transmitters have side-splash which spreads to 15kHz. As you know the Irish station swamps us and blocks Algeria, Finland and Denmark.

The s.w. bands are swamped and many are illegal. Often I have heard three using the same frequency.

The BBC hypes the f.m. band from 85 to 108MHz, but the BBC compresses modulation to avoid overloading and also to narrow the band. The BBC also cross band beams from the same antenna.

Here the f.m. band occupies at least 4MHz for each beam. On 103, 105 and 108MHz all three beams are mixed. And the range of f.m. is around 60-80 miles. I have talked to the BBC engineers here and they have admitted this.

I am getting suspicious that I am being softened up for the BBC to begin to suggest that they might boost income by taking in advertising and that the f.m. band might supersede the m.w. band and in time the l.w. transmitter dropped.

The Daventry transmitter has stopped s.w. signals and the transmission taken over to Woofferton.

John D Berridge, Cardiff

IF YOU HAVE ANY POINTS OF VIEW THAT YOU WANT TO AIR PLEASE WRITE TO THE EDITOR. IF YOUR LETTER IS USED YOU WILL RECEIVE A £5 VOUCHER TO SPEND ON ANY SWM SERVICE.

The Editor reserves the right to shorten any letters for publication but will try not to alter their sense. Letters must be original and not have been submitted to other magazines. The views expressed in letters published in this magazine are not necessarily those of *Short Wave Magazine*.

Dear Sir

What a most useful contribution Bill Wilson's was in your August issue. I have always found it curious why manufacturers of battery radios do not build in self-contained chargers such as that in his modification. For nearly 20 years, I suppose, I have had a Sony CF-420L, radio-cassette to which I cling because it has this facility.

W.H. Rees
South Godstone

grassroots

Acton, Brentford & Chiswick RC: 3rd Tuesdays, 7.30pm. Nov 20 - Feeding Dipole Antennas by G3IGM. Paul Truitt G4WQO. 071-938 2561.

Barnsley & DARC: Mondays, 7.15pm. Darton Hotel, Station Road, Darton, Barnsley. Oct 28 - Planning by G4GJB, Nov 18 - Amateur Radio on a Shoestring by G3RJV. Ernie G4LUE. (0226) 716339.

Bedford & District ARC: Tuesdays, 7.30pm. Allen's Club, Hurst Grove, Bedford. Oct 29 - Social. Glenn G0GBI. (0234) 266443.

Bromley & DARS: 3rd Tuesdays, 7.30pm. The Victory Social Club, Kechill Gardens, Hayes. Nov 19 - Stereoscopic slides by G0ILW. Geoffrey Milne. 081-462 2689.

Cheshunt & DARC: Wednesdays, 8pm. Church Room, Church Lane, Wormley, Nr Cheshunt. Nov 6 & 20 - Natter Night, 27th - AGM. Roger Frisby. (0992) 464795.

Conwy Valley RC: 1st Thursdays, 7.15pm. The Studio, Penrhos Road, Colwyn Bay, Clwyd. Nov 7 - Junk Sale. Merfyn Jones GW4NNL, 72b Princes Drive, Colwyn Bay, Clwyd. (0492) 530725.

Coventry ARS: Fridays, 8pm. Baden Powell House, 121 St Nicholas St, Radford, Coventry. Oct 25 - Night on the Air, Nov 1 - Bangers & Mash, 8 & 22nd - Night on the Air, 15th - Mini Lectures. Coventry 523629.

Derby & DARS: Wednesdays, 7.30pm. 119 Green Lane, Derby. Richard Buckley. Ambergate 852475.

Edgware & DRS: Watling Community Centre, 145 Orange Hill Road, Burnt Oak. Nov 28 - The Novice Licence and Club Participation. Hank Kay G0FAB. (081-205 1023).

Fareham & DARC: Wednesdays, 7.30pm. Porchester Community Centre, Westlands Grove, Porchester, Fareham, Hants. Nov 6 - Coding by G0FIM, 20th - Chris G8JFJ. Rod Smith G0ERS. (0705) 373572.

Hastings E&RC: 3rd Wednesdays, 7.45pm. West Hill Community Centre, Croft Road, Hastings. Fridays, 8.30pm. Ashdown Farm Community, Downey Close, Hastings. Nov 20 - Infra-red Imagery by David Watson. Reg Kemp. 7 Forewood Rise, Crowhurst.

Keighley ARS: Thursdays, 8pm. The Cricket Club, Ingrow, Nr Keighley. Oct 31 - Junk Sale, Nov 7 & 21 - Natter Night, 14th - Films. Kathy Bradford. (0274) 496222.

Mansfield ARS: 1st Thursdays, 8pm. The Polish Catholic Club, off Windmill

Lane, Woodhouse Road, Mansfield. Nov 7 - The Shortwave Broadcast Bands by G4GYU. Mary G0NZA. (0623) 755288.

Midland ARS: 3rd Tuesdays, 7.30pm. Headquarters Unit 22, 60 Regent Place, Birmingham B1 3NJ. John Crane G0LAI. 021-742 8712 (evenings).

Mid-Warwickshire ARS: 2nd & 4th Tuesdays, 8pm. St John Ambulance HQ, 61 Emscote Road, Warwick. Nov 12 - Programme Discussion for 1992, 26th - HF Antennas for You by G3OAY. Mike Newell. Kenilworth 513073.

Nelson & DARS: Wednesdays. Llancaiaich Junior School, Nelson, Mid Glam. Leighton Smart. (0443) 411736 evenings.

Norfolk ARC: Wednesdays, 7.30pm. The Norfolk Dumpling, The Livestock Market, Harford, Norfolk. Oct 30 - Introduction to Microwaves by G4DDK, Nov 6 - REAL RADIO evening, 13th - Satellite TV by G4VCE, 17th - Surplus Equipment Auction doors open 10am, 20th - RAYNET by G0IYD. Jack Simpson G3NJQ. (0603) 747992.

North Bristol ARC: 3rd Fridays. S.H.E. 7, Braemar Crescent, Northville, Bristol. Oct 25 - Bring & Buy, Nov 1 - QSL Cards and Awards 'Boast' Night, 15th - Chips, Bytes & Solder on the Carpet by G0LOJ. J. Chris G0LOJ. (0454) 616267.

North Ferriby United ARS: Sundays, 8pm. North Ferriby United Football Club Social Room, Church Road, North Ferriby. Oct 25 - Basic Test Gear by G3TEU, Nov 1 - Satellites Part 2, 8th - Night on the Air, 15th - RFI Forum, 22nd - Amateur TV. (0482) 650410.

Preston ARS: Alternate Thursdays. The Lonsdale Sports & Social Club, Fulwood Hall Lane, Fulwood. Oct 31 - The Packet Boat, Nov 14 - An Australian Miscellany. Eric Eastwood G1WCQ. (0772) 686708.

Shefford & DARS: Thursdays, 8pm. The Church Hall, Amphill Road, Shefford, Beds. Oct 31 - Barcoding for Beginners by G1BWW, Nov 21 - Junk Sale. Nigel G1JKF. (0908) 274473.

South Bristol ARC: Wednesdays. Whitchurch Folkhouse Assoc, Bridge Farm House, East Dundry Rd, Whitchurch. Oct 30 - Conquering TVI by G4VBU, Nov 6 - Bring & Buy, 13th - Simple Computer Programming by G4RZY, 20th - Free Ice-cream Evening with G4YZR. Len Baker. Whitchurch 832222.

Southgate ARC: 2nd & 4th Thursdays. Winchmore Hill Cricket Club Pavilion, Firs Lane, Winchmore Hill, London N21. Nov 14 - Construction Judging for G6QM Trophy & Brains Trust

Club Secretaries:

Send all details of your club's up-and-coming events to;
'Grassroots',
Lorna Mower
Short Wave Magazine,
Enefco House,
The Quay, Poole,
Dorset BH15 1PP

Evening. Brian Shelton G0MEE. 081-360 2453.

Stirling & DARS: Thursdays, 7.30pm. Brain Mulleady. (0324) 36235.

Stourbridge & DARS: 1st & 3rd Mondays. Robin Wood's Community Centre, Scotts Road, Stourbridge. Nov 16 - Annual Surplus Sale. Dennis Body G0HTJ. QTHR.

Stratford upon Avon & DARS: 7.30pm. The Home Guard Club, Main Road, Tiddington, Stratford-upon-Avon. Oct 28 - Oscilloscopes for Beginners, Nov 11 - Amateur Radio Observation Service, 25th - AMTOR Demo.

Three Counties RC: Alternate Wednesdays, 7.30pm. The Railway Hotel, Liphook, Hants. Nov 6 - Best Buys in Amateur Radio Equipment, 20th - On the Air. Dave G4VKC.

Todmorden & DARS: 1st & 3rd Mondays, 8pm. The Queen Hotel, Todmorden. Nov 4 - Drink Driving, 18th - Antennas. Mrs E Tyler. (0422) 882038.

Torbay ARS: Fridays, 7.30pm. ECC Social Club, Highweek, Newton Abbot. Nov 22 - Communications in British Gas. Walt G3HTX. (0803) 526762.

West Kent ARS: 3rd Fridays, 8pm. The School Annex, Albion Road, Tunbridge Wells, Kent. Nov 1 - Informal, 15th - Open Evening. John Taylor G30HV. (0892) 664960.

West of Scotland ARS: Fridays, 8pm. Scout Shop, 21 Elmbank Street, Glasgow. Oct 25 - CW/NFD 1982 video, Nov 8 - Is the RSGB Losing Credibility? Debate, 22nd - Regional Emergency Planning Communications. Jack Hood. (0698) 350926.

Wirral ARS: 1st & 3rd Wednesdays, 7.45pm. Ivy Farm, Arrows Park Road, Birkenhead, Wirral. Nov 6 - Chairman's Night, 20th - Packet Radio Cluster.

York ARS: Fridays, 7.30pm. York City Social Club, Bootham Crescent, York. K.R. Cass G3WVO. 4 Heworth Village, York.

junior listener

Radio Japan

I received a very interesting information pack from Radio Japan that I thought I'd share with you. The station is very keen to receive QSLs and even send out a special Air Mail QSL sheet. In addition to simple signal reports, they are keen to receive suggestions for programme material. Radio Japan is similar in some ways to the BBC World Service as its main aim is to improve understanding between Japan and other countries. They claim not to get involved with the propaganda and biased news that some stations transmit. One programme of particular interest is called *Hello From Tokyo* and is transmitted on Sundays. During this programme readers letters are read and questions answered. They even include the occasional live interviews with listeners. The transmission times for this programme are 0515, 0715, 1115, 1415, 1715 and 2315UTC. The frequencies to check for European reception are: 21.575MHz and 11.735MHz.

Radiocommunications Agency

I thought you might be interested to hear about some of the work carried out by this government agency. The agency is closely linked to the Department of Trade and Industry and basically looks after the radio spectrum in the UK. As well as looking after the issue of licences, it also has a very active investigation service. This is known as the Radio Investigation Service or RIS. It's main job is to make sure that licensed radio users can operate free from interference. The RIS have a very difficult task as more than 225,000 licences have been issued.

Tracking down interference can be a very tricky operation and the RIS have a special mobile team with equipment for taking measurements at frequencies up to 75GHz. The largest part of the mobile team's work is tied up, not surprisingly, with mobile radio problems.

When investigating problems on the h.f. bands the Radio Monitoring station at Baldock in Hertfordshire plays a major role. This station is continuously manned and provides assistance to foreign as well as UK operators.

In addition to its regulatory role, the Radiocommunications Agency plays an important part in the development and trial of new radio technologies.

As part of their Annual Report they publish a variety of statistics showing how the radio spectrum is used. One area that I found quite staggering was that 37% of the spectrum between 30kHz and 1GHz is dedicated to fixed and mobile links for the government!

If you'd like any more information the Radiocommunications Agency can be contacted at: Waterloo Bridge House, Waterloo Road, London SE1 8UA.



Jon Jones
PO Box 59
Fishponds
Bristol BS16 4LH

Junior Letters

Fourteen-year-old **Ian Wishart** from Northants has been interested in radio for about eighteen months. His interest was sparked off while listening to the BBC World Service on the car radio during his holiday in France. On his return, he visited the BBC's headquarters at Bush House in London - an experience that boosted his interest. His first reference books comprised *Dial Search* and the *International Radio Station Guide*.

Ian is interested in all aspects of the hobby from local radio through to amateur radio and general short wave listening. However, he has yet to build up courage to send a QSL. On this point, I would strongly recommend that he has a go. One of the benefits, especially with broadcast stations, is that you normally get all sorts of information included with the QSL card. At the very least you will find the station schedule very handy.

Like many junior listeners, Ian's shack is set up in his bedroom and comprises a Saisho SW-5000 short wave receiver and the very popular AOR AR-1000 scanner. Ian feels that he still has much to learn and would

like to start with antennas. This is one of the best places to start as you can experiment very cheaply. All you really need is some wire and a little co-operation from your parents! The popularity of do-it-yourself antennas can be gauged by the vast number of books on the subject. Personally, I would recommend that you start by using insulated multi-stranded wire. The reason for this is that it's very flexible and can be made almost invisible when mounted outside. If you want to be scientific in your experiments it's a good idea to keep notes of the basic antenna and the changes you make. You can even make use of the report writing techniques you've learnt at school! The simplest type of antenna to start with is a straight forward long wire. This consists of a random length of insulated wire. This should be as long as possible and preferably in a straight line. However, don't be frightened to include bends if you need to. Throughout all your experiments it's vital that you observe a few simple safety points:

1: Never climb a ladder or any

other structure without help from your parents.

2: Always keep antenna wires well away from all other wiring.

3: Don't run antennas above power cables - if the antenna breaks it could contact the power cable with disastrous results.

Returning to Ian's listening, he relies on books and of course the magazine to guide him in his listening. One interesting source of information that he uses is the engineering information pages on Teletext.

Chris Bazley of Rayleigh is also fourteen years old and has collected more than twenty QSL cards from broadcast stations all over the world. His present station consists of a Panasonic RFB-40L receiver with a 20m long wire antenna. Chris has sent me a sample log covering just over one week that I think may be of interest to others. I shown it here as frequency, station name, time and the SINPO report:

5955kHz, R. Netherland, 1430, 44444

6065kHz, R. Sweden, 1717, 42433

6174kHz, R. France, 1605, 43343

6190kHz, R. Switzerland, 2130, 32333

5930kHz, R. Prague, 2015, 53434

9765kHz, Spanish R, 2128, 42333

9900kHz, R. Cairo, 2254, 32332

9675kHz, R. Polonia, 2256, 44444

11735kHz, R. Belgrade, 0022,

33544

11705kHz, WCSN, 0813, 34444

11705kHz, WSHB, 0612, 23323

13770kHz, WSHB, 2025, 34444

13695kHz, Deutschewelle, 2110, 23322

13605kHz, UAE Abu Dhabi, 2315, 34343

You will see that Chris has used the SINPO reporting system that I covered back in the March 'Junior Listener'. I would strongly recommend that you adopt this system for your loggings as it is accepted throughout the world. This is particularly significant when QSLing with commercial stations.

The final letter for this month comes from **John McElhinney** of Letterkenny in Eire. John has written requesting the sample log sheets I mentioned recently. His receiving set-up comprises a Trio 9R-59DS communications receiver and a 30m indoor long wire antenna.

New Panasonic 15in TVs

The TX-15MIT and TC-15MIR are new models from Panasonic which boast excellent picture and sound quality and incorporate an array of new useful functions - including calculator and calendar facility. Designed with the audio-visual user in mind, both televisions have the relevant connections for compatibility with most editing equipment.

They are both equipped with a new Z-4 chassis, which has been purposefully developed for these latest models. This new chassis, for the first time, has allowed Panasonic to incorporate 'Fastext' on a 15in screen (TX-15MIT only), thereby giving users access to useful information at the touch of a button.

Both TVs feature the Invar Mask Tube, which brings exceptional brightness and clarity to the users screen. A 15% brighter screen and no doming, even at high current.

These new models also offer excellent sound quality. This is achieved by the 'Top Dome Sound System'. By incorporating a speaker box and grill in the top of the television, the sound is projected from the top of the unit.

With the on-going quest to provide users with 'user-friendly' equipment, Panasonic have incorporated both calculator and calendar facilities. The remote control unit features a 'menu' button. By pressing this and then selecting Calculator, the user has all the usual calculator functions on the screen. The calendar function gives users both the day and date of a

particular year. The calendar has a 200 year scan.

These models will be available from October 1991 from authorised Panasonic dealers nationwide. The TX-15MIT will set at about £299.96 and the TC-15MIR about £249.95.

The Valve Catalogue

This catalogue will be available soon from The Vintage Wireless Company Ltd and will cost £2.00 post paid UK or £3 post paid overseas. The cost is refundable with your first purchase.

There will be valve lists and prices, equivalents (including rare European), military code explanations (USA, RAF, Army & Navy), used valves available, valve cartons, valve holders, accessories, miscellaneous, valve holder guide, valve manuals, etc.

A refund coupon will be enclosed with each catalogue and you deduct the cost from your first valve purchase made from the catalogue.

All customers who have already send an s.a.e. for what was to be a normal valve list, and has now turned out as a much grander affair, please do not send additional funds. Your s.a.e. will be accepted as payment, but no refund slip will be enclosed.

The Vintage Wireless Company Ltd. Tudor House, Cossham Street, Mangotsfield, Bristol BS17 3EN.

DX TV News

Though TVDXers have been using v.i.t.s. (vertical interval test signals i.e. the series of lines and dots at the top of the TV picture) to assist with station identification, recent observations by Dalibor Frkovic in Yugoslavia suggests that Arabic signals are less than certain. For example, Iran has been seen using no v.i.t.s., thin v.i.t.s. lines and standard (European) type v.i.t.s. suggesting that use is random and it's unwise to rely too much on v.i.t.s. for identification.

The TV2 group in Norway have been awarded the commercial TV franchise that will last for 10 years and hopes to start transmissions Autumn 1992. The new network will be based in Bergen, from where the transmitter network will expand. Meanwhile, the proposed Irish TV3 network is still in limbo pending amendments to the Broadcasting Act which will remove advertising restrictions that were reducing advertising revenue and could have made the TV3 commercial network unviable. At the end of August, the TV3 consortium were considering putting on hold any further progress due to the poor financial conditions prevailing.

The Greek government is, at last, to introduce legislation in an effort to control the rash of private radio and TV stations that have spread throughout the country, not unlike Italy of some years ago. This should result in a large scale reduction of stations, at least 26 TV stations were operating in Athens at the end of July, with scant regard to interference protection. The new powers should halve the TV stations now operating and up to 75% of radio stations will also disappear. There are thought to be only 13 available channels in the Athens area with ERT (the national broadcaster) taking 3, RIK (Cypriot channel) a 4th and with several main satellite channels taking other terrestrial outlets.

Tele Piu, the new Italian broadcaster, has experienced a successful start to the broadcasting field with considerable consumer uptake in her 3 channel subscriptions. Over \$50million has been spent so far with a further \$400million up to 1994. The scrambled mode used on the Pay-TV network is the Irdeto system.

Roger Bunney

MULTICOM.EXE

MULTICOM.EXE is a program to drive an Icom radio. It requires an IBM PC, EGA graphics (256K minimum), one serial port plus any Icom radio with a CAT port.

The program comes supplied with a simple interface, although any other suitable interface may also be used. It also comes with set-up files for the IC-735, IC-726, IC-781, IC-765, IC-751, IC-575, IC-275, IC-475, IC-1275, IC-R9000, IC-R7000, IC-R71 and a few more. These files may be altered, renamed, loaded and saved from within the program. Also, new files may be created to accommodate future products.

A few of the features of the program are: it operates in the frequency range of 10Hz up to 10GHz, allows for frequency converter/transverter use, scans up/down by the cursor keys, scan speed and tuning step size are pre-selectable before scanning, easy to use graphic program amongst other features.

If you would like more details on this program, which costs £50. Then contact:

Ivor Mantell, 24 Bourne Avenue, Fazeley, Tamworth, Staffs B78 3TB.

Broadcasts to Yugoslavia

The BBC World Service is splitting its Serbo-Croat output into separate Serbian and Croatian transmissions from the end of September. This means that the BBC will then be broadcasting to Yugoslavia in three languages in addition to English. It has been broadcasting separately in Slovene since WWII. The latest change was planned in January and comes into effect on September 29.

The move will be welcomed by potential rebroadcasters in Yugoslavia who require separate Serbian and Croatian programmes rather than the combined Serbo-Croat output that the BBC has traditionally broadcast on short wave. Five radio stations in Slovenia already rebroadcast BBC Slovene programmes but none in Croatia or Serbia is using Serbo-Croat broadcasts.

The changes will mean that Serbian and Croatian will each be broadcasting for five and a half hours a week. Slovene will remain at five and three quarter hours. Short wave broadcasts will continue in all three languages and the programmes will be beamed from London via satellite for downlinking by local f.m. and a.m. radio stations.

The new pattern of broadcasts will be (local times):
1200-1215 - Slovene; 1230-1245 - Serbian; 1300-1315 - Croatian; 1800-1830 - Serbian; 1830-1900 - Slovene; 1900-1930 - Croatian.

International Short Wave League

The International Short Wave League (ISWL) was formed in 1946 and for 45 years has provided facilities enabling members to enjoy their hobby to the greatest advantage to themselves and fellow enthusiasts.

The League effectively caters for members interested in both the amateur and broadcast bands, membership being equally open to licensed amateurs and s.w.l.s. Published monthly and issued to members, the League journal *Monitor* includes coverage of the h.f., v.h.f. and broadcast bands, transmitting topics and general interest articles.

For full details on the ISWL membership, send an s.a.e. to:

Evelyn May G-17197/G00ZI, ISWL HQ, 10 Clyde Crescent, Wharton, Winsford, Cheshire CW7 3LA.




Elegant Console

Elegant, from Bopla, is an enclosure for hand-held instruments. It is moulded from high impact polystyrene, with a two-tone light grey finish. The main feature of the new Elegant Console is a sloping display panel that can accommodate a membrane keyboard. Also new is the increase in depth that allows more components to be accommodated and makes the unit ideal for mobile data acquisition equipment.

The key area is 87 x 105 x 2mm and the display area is 87 x 38.5mm. Mounting bosses are provided for standard 16-character and 4-line displays. Presently, only available in one size, but smaller versions are currently being developed.

**Bopla Ltd,
Phoenix Mecano
House, 6-7
Faraday Road,
Aylesbury,
Buckinghamshire
HP19 3RY. Tel:
(0296) 399 999.**



Radio Stations in the UK

The 1991 edition of the *Radio Stations in the United Kingdom* has just been published by the British DX Club. The booklet is now in its 10th edition and follows the successful format of previous years. It has been completely revised and updated to reflect the current situation.

In frequency order, the booklet lists all British m.w. a.m. and f.m. radio stations - both BBC and ILR - including their location and transmitter power. To help with identification, each frequency is cross-referenced to show possible parallel channels. A reference section gives the full postal address and telephone number of each station, as well as background information on the various Development licences, 'unofficial' radio and reception reporting.

The booklet costs £2, 5 IRCs or \$4 per copy. This includes postage worldwide.

British DX Club, 54 Birkhall Road, Catford, London SE6 1TE.

British DX Club

The British DX Club's monthly bulletin *Communication* celebrated a milestone in July, with the publication of its 200th edition. The first issue of *Communication* appeared back in September 1974, since when it has supplied British DX Club's ever expanding membership each month with up-to-date information and tips on broadcast band DXing.

Details of membership and a sample copy can be obtained for return postage from the Club Secretary.

Colin Wright, British DX Club, 54 Birkhall Road, Catford, London SE6 1TE.

rallies

***October 25 & 26:** The Leicester Amateur Radio Show will again be held at the Granby Halls, Leicester.

***November 2/3:** The 5th North Wales Radio & Electronics Show will be held at the Aberconwy Conference Centre, Llandudno. The rally opens at 10am with the entrance fee at £1, OAPs 50p and children under 14 free of charge. **Siggy Fergusson GWODYH. Tel: (0492) 532459 (day). Tony Wilkinson GW4PVU. Tel: (0492) 49121 (evenings).**

November 10: Barnsley & District ARC will be holding their first Radio Rally at Willowgarth Senior High School, Brierley Road, Grimethorpe, Barnsley, South Yorkshire. Details and trade enquiries from **Ernie G4LUE, 8 Hild Avenue, Cudworth, Barnsley, South Yorkshire S72 8RN. Tel: (0226) 716339 (6-8pm).**

***November 17:** Bridgend rally. Further details from **Charles Sedgebeer, 50 Minfrwd Road, Pencoed, Mid Glamorgan, South Wales CF35 6SD.**

November 24: The West Manchester Radio Club's 'Winter Rally'. All details as August Rally. Admission £1. **Dave G1100 on (0204) 24104 evenings only.**

December 1: The Bishop Auckland RAC are holding their rally at the Sunydale Leisure Centre, Shildon, Co. Durham. Doors open 11am (disabled 10.30am). **G0FBK. Tel: (0388) 606819.**

***December 15:** The Centre of England Amateur Radio Rally will be held at the British Motorcycle Museum, Bickenhill, near the NEC Birmingham (junction 6 M42). Doors open 10.30am, admission £1, OAPs 50p, children free. Over 60 trade stands in three large

exhibition halls, Bring & Buy, talk-in on S22, bar and restaurant available, ample free parking, concessionary rates to visit museum. **Frank Martin G4UMF. Tel: (0952) 598173.**

1992

January 26: The 2nd Lancastrian Rally will be held at the University of Lancaster. Doors open 10.30am for the disabled and 11am for everyone else. **Sue G10HH. Tel: (0524) 64239.**

February 16: The Kidderminster & DARS rally will be held at the Harry Cheshire School, Habberley Road, Kidderminster, Worcs. Doors open 10am. **G8JTL. Tel: (0384) 894019.**

February 23: The Northern Cross Radio Rally will be held at Rodilian School, Lofthouse, West Yorkshire.

March 7: The TARS annual rally will be held as a new venue this year, the Temple Park Leisure Centre in South Shields. **Jack GODZG. Tel: 091-265 1718.**

April 5: The Launceston 6th Amateur Radio Rally will be held at Launceston College. Doors open 10.30am. **Maggie. Tel: (040921) 219.**

***June 14:** The Royal Naval ARS will be holding their annual rally at HMS Mercurv, near Petersfield, Hants. Gates open from 10am to 5pm. **Cliff Hcrper G4UJR. Tel: (0703) 557469.**

November 28: The Greater London Amateur Radio & Computer Show will be held at Harrow Leisure Centre, Christchurch Avenue, Harrow, Middlesex. Doors open from 10.30am to 4.30pm. **CLPK. 18 Litchfield Close, Clacton-on-Sea, Essex CO15 3SZ.**

*** Short Wave Magazine & Practical Wireless in attendance ***

When you are ready to graduate to real listening Look to Lowe

The NRD-535 with a subtle difference



The NRD-535 is accepted as one of the outstanding HF receivers in the world and we, at Lowe Electronics, are proud to be a JRC specialist distributor.

Good as it is, we felt that even the NRD-535 could be "breathed on" and we have produced an upgrade series of modifications which makes the NRD-535 into a real stunner.

The improvements include a specially designed high-performance IF crystal filter, detailed flattening of the audio response, a completely new higher-power audio output amplifier and, if the ECSS unit is fitted, modifications to the PLL system giving greater lock stability.

Each NRD-535 which has our upgrade treatment also has a pre-aging period for settling down the master reference oscillator and a careful check of detailed alignment to ensure that the "Lowe" NRD-535 is as near perfect as any receiver can be.

You CAN tell the difference with your ears. Contact us for details and cost of this worthwhile step-up for the NRD-535; available from Lowe Electronics only.

HF-225 Gateway to the World



- * 30kHz - 30MHz
- * Tunes in 8Hz steps.
- * 30 memory channels
- * IF filters for all modes already fitted
- * Keypad & tuning knob freq. control
- * British designed & built by Lowe
- * Voted 'Receiver of The Year' by WRTH
- * Optional AM/FM Sync. Detector
- * Optional keypad for remote entry
- * Excellent quality at reasonable cost
- * Price: £429.00 inc VAT

FREE

Send four first class stamps to cover the postage and we will send you, by return, your FREE copy of 'THE LISTENERS GUIDE' (2nd edition); a commonsense look at radio listening on the LF, MF and HF bands. Its unique style will, I am sure, result in a 'good read'; but underneath the humour lies a wealth of experience and expertise. You will also receive detailed leaflets on our range of receivers and a copy of our current price list.




FOR DETAILS, TELEPHONE 0629 580800

LOWE ELECTRONICS LIMITED

Chesterfield Road, Matlock, Derbyshire DE4 5LE Telephone: 0629 580800 Fax: 0629 580020

Aerial systems for Serious Listeners

Look to Lowe



DX-One Electronic Antenna

£254 inc VAT

The World Radio TV Handbook said of the DX-One "... the best of its type available anywhere in the world." It has a frequency range of 50kHz - 50MHz (*3dB) and 10kHz - 75MHz (*6dB); it is both horizontally and vertically polarised, so low-angle (DX) signals suffer less selective fading. The output level from the antenna is adjustable in steps from +6dB to -40dB for optimum matching. The extremely high intercept point (+66dBm 2nd order, +40dBm 3rd order) and a very low noise figure (12.8 dB) ensure optimum performance. The indoor unit contains a mains power supply, a step-wise attenuator and a very effective medium wave suppression filter. It also has two receiver outputs for feeding two receivers without mutual interference.



SP-2 Antenna Splitter

£152 inc VAT

A growing number of radio enthusiasts have two receivers, but no space for two separate antennas. The SP-2 is the answer for connecting two receivers to one antenna (be it active or passive). The SP-2 offers a very high degree of isolation between the two receivers (<30 dB). The SP-2 ensures that, within the frequency range of 50kHz - 50MHz, no unwanted mutual interference, heterodynes or signal loss will occur as a result of connecting a second receiver.

With a single receiver, the SP-2 offers a precision step-attenuator (0 - 40 dB) which helps to reduce receiver inter-modulation. Included is a very effective switchable medium wave suppression filter.

For those with space for a second antenna (e.g. one horizontal, one vertical), the SP-2 offers a simple way to switch between the two for comparison purposes.




Magnetic Longwire Balun

£36 inc VAT

This balun has been described in the trade press as the "most revolutionary development for shortwave listeners in the last 25 years". Quite a claim! But this antenna device does solve one of the most severe problems associated with random long wires; the input cable. An MLB allows you to use highly screened co-axial cable between the antenna and receiver WITHOUT energy loss due to impedance mismatch. Computers, light-dimmers, televisions, and fluorescent lights no longer cause interference problems. We recommend RG58/u 50ohm co-axial cable.

The MLB has been designed so that a very short length of antenna wire can be used and still be perfectly matched to the 50ohm antenna input of the receiver. Even an antenna of just 12.5 metres (41 feet) provides good results from 100kHz - 40MHz without the need for an antenna tuner. Static build-up on the antenna is allowed to leak away to earth potential - excellent for protecting receivers with FET front end circuitry. Static noise levels on long, medium, and the tropical short wave bands of 60 & 90 metres are considerably lower. The MLB is easy to mount on existing longwire or "T" antennas.



MLB Antenna: Mark I

£56 inc VAT

A complete passive wire antenna with a built-in MLB, the MLB Antenna: Mark I has excellent performance on long, medium, and short waves. It is 12.5 metres in length and can be mounted vertically or horizontally. Frequency range 100kHz - 40MHz.

The MLB Antenna: Mark I offers all the advantages of the Magnetic Longwire Balun like: coaxial feeder, broadband performance without an antenna tuner and static decoupling. Heavy duty and completely water-proof, it comes complete with nylon support cord, heavy-duty insulator, high-quality plastic covered antenna wire, PL 259 connector and a water-tight rubber sleeve to cover co-axial/MLB connection.

MLB Antenna: Mark II

£67 inc VAT

Similar to the Mark I, but 20 metres long. The MLB Antenna: Mark II offers improved performance at medium and long wave frequencies, although the high frequency performance above 30MHz is reduced.

THE LISTENERS' BOOK OF THE YEAR GETS EVEN BETTER

The new 1992 issue of 'Passport to World Band Radio' is now with us and it's even better than before. The 200 pages have risen to almost 400 and every section carries the unmistakable authority of the world's best short wave companion.

Broadcasts are listed as before; not only in frequency order but also by language, country of origin AND the times of broadcasts. There are no less than 56 pages of receiver reviews, including the latest NRD-535 and Drake R-8, together with news, views and general information.

If you own a short wave radio, you simply MUST have the 'Passport' by its side. The price last year was £12.95; we have kept the price exactly the same this year at £12.95 (plus £1.55 for post and packing). Send off today.

Barry (S Wales): 0446 721304 *Bournemouth: 0202 577760 Bristol: 0272 771770 Cambridge: 0223 311230
Cumbernauld: 0236 721004 *Darlington: 0325 486121 London (Heathrow): 0753 545255 London (Middlesex): 081-429 3256

*Closed all day Monday

5XX

Wonder Station of the 1920s

It is now sixty-six years since the official opening of the ultra-powerful Daventry transmitter on 27 July 1925 and most listeners could henceforth tune-in an alternative programme - London - in addition to their local station. By contemporary standards, this was listening affluence.

In the two-and-a-half years that had elapsed since the British Broadcasting Company started operations in November 1922, nine main stations and ten relay stations had been built around the country. The relay stations were low-powered transmitters that boosted the local programme in areas where reception was particularly poor.

Since neither the transmitters nor the domestic receivers were very powerful, the owner of a radio could usually tune-in only the local station. In the south-west, for instance, this was usually Cardiff 5WA on 351 metres (854.7kHz), which was considered a somewhat high-brow station. But most British listeners hankered after the more prestigious London programme, to chuckle at the nonsense of comedian George Robey and tap their feet to the rhythm of the Savoy Orpheans dance band. Eventually, to satisfy this demand, most local programmes did include some material from London.

By August 1924, about two-thirds of the population were in a position to receive their local station on a cheap and simple set, if they owned one. The BBC had always envisaged the listening public as owning simple crystal sets that required no expensive batteries or components, but operated entirely from the power received from an

outdoor antenna up to 31m long and often 12m high. Countless such antennas, many of them unsightly, festooned the gardens and backyards of the towns. Now the authorities were concerned to make a programme available to the 30 to 40% of people - mainly country dwellers - who could not yet receive any programme.


The idea of a very high power station that would enable people as far as 160km away to pick up its programme on a crystal set, was first put forward in December 1923. The projected

station was to have a wavelength of between 1400 and 2000m (214 and 150kHz), instead of conforming to the accepted 'broadcast range' of 250 - 500m (1200 - 600kHz), since long wave stations could be received at far greater distances than medium wave transmitters. The BBC applied to the Post Office for a temporary licence to make experimental transmissions from the Marconi works at Chelmsford, Essex, where British broadcasting had begun. From July 21 onwards, the London programmes were relayed nightly after seven o'clock.

Obstructive

At first, the Armed Services were obstructive, as they had previously been to the whole idea of broadcasting. Eventually, they reluctantly agreed to a long wave station working on 1500m (200kHz), situated north of a line from the Severn to The Wash, with power not greater than 25kW. Until the new station was built, Chelmsford could continue broadcasting the London programme after 7pm.

It was decided to situate the giant station in the Northampton district, and BBC engineers were sent to survey

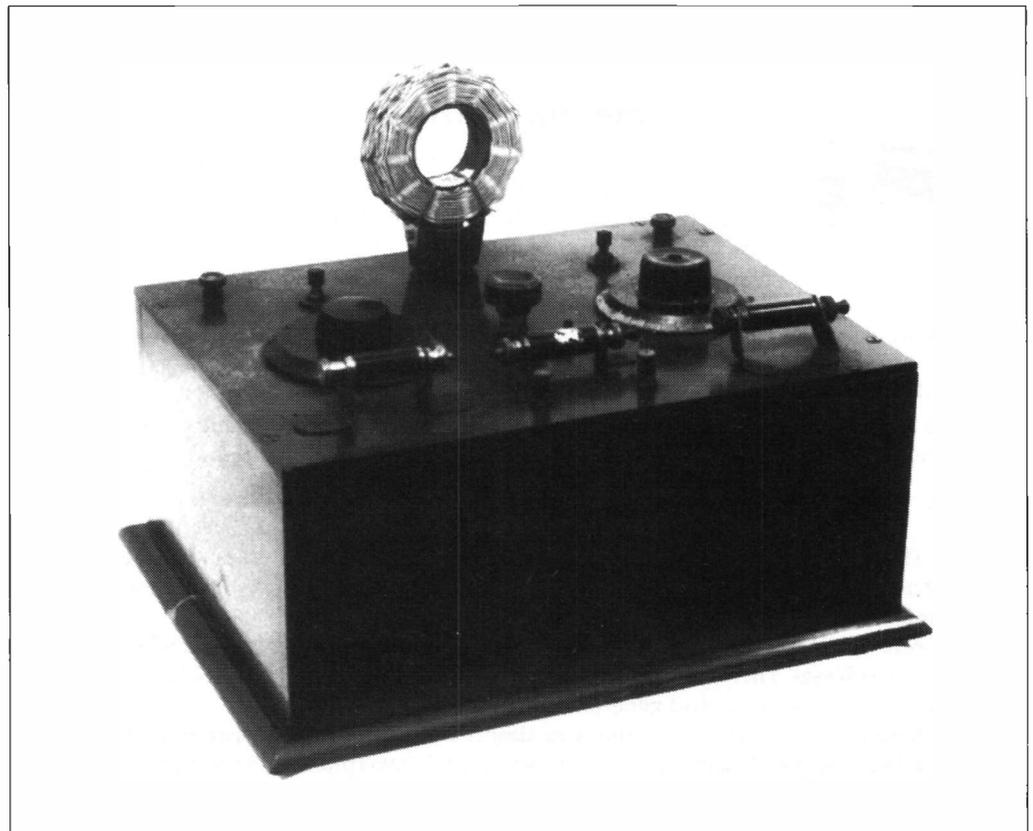

A luxurious home-built crystal set having a choice of three different crystals and other refinements. On top can be seen the long wave '5XX' coil that was switched in to receive Daventry. Sixty-six years later the set still works perfectly.

Sixty-six years ago this summer, two million British licence holders twiddled the knobs of their crystal sets and primitive valved receivers with more than usual eagerness. Eric Westman tells why.

possible sites. They soon pronounced one, at Borough Hill, 1.2km from Daventry, as 'pre-eminently suitable'. It consisted of a flat expanse of more than 50 acres at a height of about 200m above sea level. The BBC bought it for £2670 freehold. Work started straight away, to be finished early in the summer of 1925. A high quality land-line from the capital enabled it to radiate the highly esteemed London programmes from a massive antenna that was held aloft by two steel masts 150m high and 245m apart. It was the most powerful broadcasting station in the world, as well as the first on long wave. Since all transmissions bore callsigns, Daventry was allotted the combination 5XX - the double X referring to its special and experimental nature.

Although Daventry actually started broadcasting on July 21, it was officially opened six days later on July 27, by Sir William Mitchell-Thomson, the

Postmaster General. To commemorate the opening, the Poet Laureate, Alfred Noyes, wrote a stirring poem, *The Dane-Tree*, which was broadcast. The final verse went:

*"Daventry calling...
Daventry calling...
Daventry calling... Dark and still.
The tree of memory stands like a sentry...
Over the graves on the silent hill."*

With the opening of Daventry, the BBC now provided at least one programme to 85% of the population, even if they owned only crystal sets. And those who aspired to one-valve sets could receive the

station from as far away as 240-320km. Indeed, a large number of listeners now had the choice of two programmes.

Saviour

There was one very important spin-off from the setting-up of 5XX that had a most beneficial effect on the British radio industry. Britain was being flooded by excellent radios from the USA, whose radio industry was more advanced than ours. But the American sets were not built for long wave reception, and so could not bring in Daventry. All the new British sets were provided

with a switch to enable reception both of the medium waves, with their local station, and of the long waves - thus bringing in Britain's most desired programme. Lacking this facility, American sets no longer sold, and Britons resumed buying British-made equipment - or making their own. Daventry proved to be much more than an alternative programme, it became the saviour of the British radio industry.

The new station also provided the first controversy over BBC pronunciation. Local people, for historical reasons, had always pronounced the name of the district as 'Dane-tree', but the BBC insisted upon pronouncing it as it was spelt. But to all listeners, however, they pronounced it, Daventry was the greatest event that had occurred since the formation of the BBC. Nothing equalled it until the mass arrival of television. ■

Abbreviations

BBC	British Broadcasting Company (later Corporation)
kHz	kilohertz
km	kilometres
m	metres

Your Comments...

Dear Sir

September *Short Wave Magazine* has been brought to my notice, and I read with great interest the article on the EF50. There are some comments I would like to make. The valve was developed in Holland before the war, see *Wireless World* for 16 February 1939, and incorporated in the Pye 45MHz straight television receiver. This was much used in airborne radar as an i.f. amplifier. Reference to the *Wireless World* article will show that the valve originally had no screening can and had locking pins.

Your photograph shows the production versions. Mullard denied that there ever was a different prototype, which was rather unfortunate since I have one, marked with a proviso that it is a prototype and production could not be guaranteed.

I also have a prototype EE50, of similar appearance. This

valve is adequately described in *Wireless World* for 20 April 1939, but it never really caught on. The EF50 managed an adequate mutual conductance without recourse to secondary emission.

Incidentally, the ratio of mutual conductance to input capacity is generally regarded as the criterion of goodness for r.f. amplification, noise factor also being important and the RL7 (VR136) was the European leader at the time. However, the RL7 was not suitable for pulse circuits, and cost more, therefore it was used for head amplifiers only. The EF50 was the op-amp of that era, as I explained in an article on the Anode Follower in *SWM* some time in the late forties, when Austin Forsyth was the editor.

**R. Brett-Knowles G3AAT
Havant**

Educational Software for Basic Electronics - Part 9

J.T. Beaumont G3NGD continues this series with some programs to teach students about mathematical formulae.

Transposition of Formulae

This program is a 'self-learning tutor'. When program is RUN, the student may choose any of the following options which are listed in a menu.

1. Transpose symbols connected by a Plus or Minus.
2. Transpose symbols connected by a Product.
3. Transpose symbols connected by a Quotient.
4. Perform Cross-multiplication.
5. Transpose symbols connected with Brackets.
6. Transpose symbols connected with Reciprocals.
7. EXIT from the program.

After a demonstration of the techniques involved, the student is given the opportunity to transpose the formulae on a line-by-line basis. The same question can be repeated if necessary.

Simultaneous Equations

This program helps teachers and students to check their answers when performing calculations involving simultaneous equations.

From the screen lay-out (S.22), it can be seen that the actual question appears on the screen at the same time as the answer. This is programmed using the

Simultaneous Equations.

$$7x + 4y = 41$$

$$4x - 2y = 2$$

$$x = 3$$

$$y = 5$$

Press the space-bar to continue

S22 is shown above with S23 below.

Quadratic Equations.

$$ax^2 + bx + c = 0$$

The Formula is:

$$-b \pm \sqrt{b^2 - 4ac}$$

$$2a$$

$$3x^2 + 8x + 2 = 0$$

$$x = 2.39 \text{ or } 0.28$$

Press the space-bar to continue

procedure DEFPROC-Setup. Here, use is made of the function 'ABS', which means absolute value. (This turns a negative number into an equivalent positive number).

In lines 480 to 490 the values of (Y) and (B) are represented by (Q) and (R) respectively, and are both positive. Variable A\$ and B\$ are used to insert a plus or minus sign if that is the

case. (Q and R are only used in printing the question). After entering the numbers, which can be either positive or negative, you should press the RETURN key.

Quadratic Equations

This program helps teachers and students to check their answers to calculations involving quadratic equations.

The complete suite of programs is available on a 5 1/4 in 40 or 80 track floppy disk direct from Short Wave Magazine. The software is only available for the BBC Computer, price £8.95 post free.

The program prints the question on the screen in a similar manner to that shown in the last program (P22). Use has been made of 'User Defined Graphics' so enabling the formula to be printed on the screen (S.23).

At line 330, the print format of the computer (0) has been set so as to give the answers to two decimal places.

In this program use has been made of 'Functions'. Functions are similar to 'procedures' but always give a calculated result; in this case FNPOS(X) and FNNEG(X) performs the calculation when the equation is positive or negative respectively.

```

350 PRINT x = FNPOS
      (the calculation is
      performed below)
430 DEF FNPOS(X)
440 X=(-B+SQR((B^2)-(4*A*C)))/(2*A)
450 = X
    
```

When solving engineering problems, it is possible to have roots with negative numbers. It is not possible to find the value of the square root of a negative number, and when this is encountered the negative numbers are represented by the symbol **j**. (Pure maths books tend to use the symbol **i**, but in engineering books **j** is used because symbol **i** represents the value of the instantaneous value of current). If, for example, the answer to a problem was $x=2.00 + j3.00$, then the number 2.00 is called the real part and $j3.00$ is the imaginary part. The expression $x + jy$ is called a complex number.

MARTIN LYNCH

G4HKS

THE AMATEUR RADIO EXCHANGE CENTRE

286 Northfield Avenue, Ealing, London W5 4UB. Tel: 081 566 1120 Fax: 081 566 1207

RATHER THAN BLOWING MY OWN TRUMPET, I THOUGHT THE CUSTOMERS SHOULD HAVE A SAY...

STANDARD

YAESU

ICOM

KENWOOD

ALINCO

AMSTRAD

Authorised Dealer

Thornfield
Mount Carmel Road
Palestine
Grateley
Hants SP11 7ES

3rd September 1991

Dear Martin

Last Saturday I called in and bought a TS120V, having phoned the previous day to "reserve" it for 24 hours.

Since it was my first visit, I thought you might like to know how pleased I was with the courtesy and attention you gave me.

By "you", I mean all three of you of course, (the coffee was particularly welcome!).

During the time I spent checking out the rig, I felt that you really cared that I was happy with it before buying. I was quickly provided with a power supply, serial connection, dummy load and key, as soon as I asked for them.

I particularly appreciated the availability of the test-bench in the shop and being left alone while I checked out the rig.

In short, I found your team friendly, professional and extremely helpful, with a welcome absence of sales pressure. I'll certainly buy from you again!

73s

Dave G3LSL

PS

The rig's superb!

MVT 7000 arrived safely this morning.
Many thanks for an excellent service!
Regards Dave

To: Mr Martin Lynch
286 Northfield
Ealing
London
W5 4UB.

Dear Mr Lynch,
Re: Faulty
my Fairrite scanner and your prompt service in exchanging
second hand stock. It really is a pleasure to find a dealer
in Ham equipment who cares about it's customers. I hope you
have such success.

Yours faithfully
D. Andrews

May
25th July '91
Glos. G152 5BH

Dear H. Lynch,
No 2005, Duvion 02992

I am pleased to tell you that I
received the above, safe and
sound, by Parcel Post, at 11.30am
today.
Thank you, and your staff, for the
very efficient manner in which this
transaction has been carried out.
Yours faithfully,
Peter Chamberlin

Martin Lynch is a Licensed Credit Broker.

Full written details upon request.

Typical APR 36.8%

PHONE 081-566 1120



For fast mail order Tel: 081-566 1120. Please add
£10.50 for 48 hour delivery.

SHOP OPENING HOURS:

Tuesday - Saturday 10 - 6pm.

24 hour Sales HOT LINE 0860 339 339 (after hours
only). FAX order line open 24 hours

WHETHER YOU WISH TO BUY OR SELL, NEW OR USED, RING ME TODAY. I GUARANTEE YOU WON'T BE DISAPPOINTED. VISITING THE SHOP OR MAIL ORDER, YOUR BUYING EXPERIENCE WILL BE TOTAL PEACE OF MIND - OR YOUR MONEY BACK, GIVE ME A TRY - I WON'T LET YOU DOWN.

73 MARTIN G4HKS

Improving Short Wave Broadcast Reception

If you have two antennas for the reception of an a.m. short wave broadcast signals, you may have noticed that the fading and distortion occur on each antenna at different times. It follows that combining the two signals should improve the quality of reception. R. A. W. Hill GM0IJF describes a simple and easily constructed circuit for doing just that.

The idea of using several antennas simultaneously to combat fading dates back to the early days of radio. Because the antennas were sometimes miles apart and the relative phases of the signals indeterminate, signals were received and detected separately, often with a common a.g.c. system, before being combined. In the system outlined here the signals are, in fact, combined directly, with suitable phasing, before being passed to the receiver. An important aspect of the design is that the antennas are isolated from one another electrically by a resistance network that also allows adjustment of the relative levels of the two signals. This is important, since, if the two antennas were simply connected together so that current could flow freely from one to the other, we would have a third antenna, with its own fading and distortion pattern, probably no better than those of the two separately.

For many purposes the loss of signal in the level and phasing networks is not significant, but in this connection it can be mentioned that the circuit is best suited to listening to rather strong signals for considerable periods of time, since 'selective fading', which is so fatiguing to the ear, is noticeably reduced.

Practical Circuit

The circuit shown in Fig. 1 is for two 'random wire' antennas. It has facilities for adjusting the level and phase of both signals, as well as a switch position which by-

passes the tuned circuit, should no phase shift be required. To use the phase shift, the capacitor is first tuned to resonance (f_r) by getting a signal minimum. Tuning to either side of resonance (f_r), to about $0.9f_r$ or $1.1f_r$, then gives an appreciable phase shift (with some attenuation) of perhaps $\pm 75^\circ$, depending on which way the capacitor is turned.

The circuit Q should be high, which means that the capacitance should not be too large: 100-200pF seems to work well. Also, the Q of the coil itself should be high and 22s.w.g. wire on a 25mm

former, with plenty of taps, selected by S3 and S4, is satisfactory. This allows coverage of a range of frequencies, while keeping the capacitance within the range mentioned.

During adjustment of the circuit, the switches S1 and S2 need to be quickly and easily operated. A crocodile clip on the antenna wire, to be clipped onto a piece of stiff wire protruding from the unit, is very convenient for this purpose.

The 200 Ω resistors are for isolating the antennas from one another, as already mentioned. The use of

logarithmic potentiometers allows smooth adjustment of the two signal levels.

The connection to the receiver should be by the shortest possible length of low capacitance coaxial cable. If available, a good direct earth should be connected to the unit, not the receiver.

Adjustment of the Circuit

Adjustment for a chosen station can be done in several ways, according to preferences and previous experience, but the aim must always be to get the two

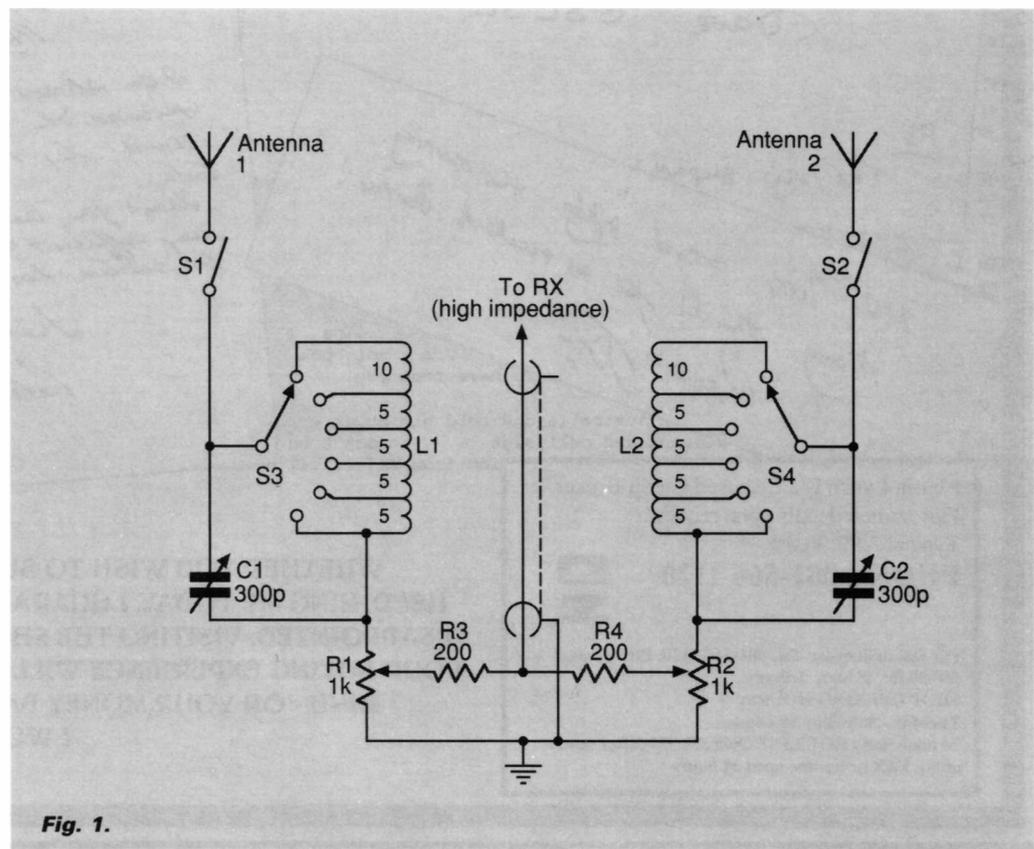


Fig. 1.

Project

YOU WILL NEED

Resistors

0.25W Carbon Film 5%

200Ω 2 R3,4

Potentiometers

1kΩ log 2 R1,2

Capacitors

Variable

0-300pF 2 C1,2

Switches

Rotary

1p6w 2 S3,4

Miscellaneous

22s.w.g. enam. copper

wire; 25mm dia.

former; Plastics box. Knobs (6).

signals at the receiver at the same level, and fairly closely in-phase. A rather rough adjustment may result in an audible improvement, but it is a good idea to aim for a situation where disconnecting either antenna shows a noticeable decrease in signal of a few dB, as indicated on the S-meter. If connecting a second antenna results in a decrease in signal, the two components must be out of phase, and if this decrease is large, the phase difference must be approaching 180°. In this case noting the settings of

the controls, and then shifting the phase and level controls accordingly, can be a useful approach to getting good results.

Suitable Antennas

Fading patterns of antennas may differ because they are

differently located, or because they respond differently to the plane of polarisation of the incoming wave. Polarisation effects of considerable importance have been reported by B. Sykes G2HCG (*Practical Wireless*, November 1989, p26). In the tests reported

here one antenna was a wire running as directly as possible, vertically, to the highest point of the house, the other a rectangle of 100m of wire, at a height of about 5m, both ends of which are available at the receiver. Either end, or the two connected together, could be used, giving useful flexibility when adjusting phase. ■

Results

The prototype unit, built in a plastics box, works satisfactorily between 4 and 15MHz. At higher frequencies some screening may be necessary.

The Lowe HF-125, was used, usually in the synchronous a.m. mode. With this refinement, some remarkably good programme quality has been achieved.

Stations investigated include All India Radio on 11.620MHz and Deutsche Welle on 6.075 and 9.545MHz. Phase and level settings for Deutsche Welle have been shown to remain remarkably constant from day to day.

The success of these test depends on subjective aural judgement and I am indebted to Mr Graham Perry GM0EFC and to Dr Wolfgang Korner, both experienced listeners, for their assistance in assessing the circuit performance.

SHORT WAVE
COMMUNICATIONS

SHORT WAVE
COMMUNICATIONS
by Peter Rouse G1UDK

SHORT WAVE COMMUNICATIONS

A BRAND NEW PUBLICATION AVAILABLE FIRST AT THE
LEICESTER SHOW ON STAND 3.

THE WORLD OF SSB COMMUNICATIONS IS VERY VARIED. THIS NEW BOOK BY PETER ROUSE, AUTHOR OF THE POPULAR SCANNERS 1 & 2 TITLES, TAKES YOU THROUGH THE MOST POPULAR TYPES OF SIGNALS TO BE FOUND. COVERING INTERNATIONAL FREQUENCY LISTINGS FOR AVIATION, MARINE, GOVERNMENT, SPACE LAUNCHES, SEARCH AND RESCUE AND MUCH MORE. YOU SHOULD FIND ALL YOU NEED TO KNOW TO GET THE BEST FROM YOUR SSB LISTENING.

Tuning in to the Secret Broadcasters - 2

In this concluding part, Gerry L Dexter surveys the current clandestine scene with frequencies and times of known transmissions.

To get you started, here is a survey of what's out there, presented alphabetically, by target country. Remember that new stations are always coming on the air and current stations departing. Times and frequencies fluctuate and transmissions may not occur on a daily basis or may be altered at weekends. Addresses of stations or the groups operating them are included where known. Languages used have not been specified but may be assumed to be in the language(s) or vernaculars of the targeted country, e.g. most anti-Iranian clandestines broadcast in Farsi. Times are given in UTC.

Afghanistan - Afghanistan Mojahedin Radio. 6.140MHz at 0200-0330 and 1230-1400.

Afghanistan - Radio Free Afghanistan, via RFE/RL. 7.255 and 9.555MHz, 0230-0300; 9.540 and 11.770MHz, 0230-0330; 17.895, 21.510 and 21.530MHz at 1330-1430. Address: RFE/RL, 1775 Broadway, New York, NY 10019, USA.

Afghanistan - Voice of Unity (Muslim Mojahedin of Afghanistan): 12.230 at 0130-0215, 122-1255 and 1515-1615;

15.100MHz at 1200-1255; 15.685MHz at 0130-0215, 1200-1255 and 1515-1615; 17.540MHz at 0130-0215 and 1515-1615. Address: Postfach 2605, D-2000 Hamburg 60, Germany.

Angola - A Voz da Resistencia de Galo Negro (Voice of the Resistance of the Black Cockrel) (UNITA). 7.100MHz at 1800-2300; 9.700MHz at 0500-0830; 11.830 at 1100-1400; 15.500MHz occasional tests around 2100. Address: c/o Free Angola Information Service, 1850 'K' St. NW, Suite 350, Washington, DC 20006-2202, USA.

Cambodia - Voice of the National Army of Democratic Kampuchea. 5.407MHz at 0800-0900, 1000-1500 and 2315-0200. Address: First Secretary, Permanent Mission of Democratic Kampuchea to the UN, 747 Third Avenue, 8th Floor, New York, NY 10017, USA. Believed located in China.

Cambodia - Voice of Democratic Kampuchea (Khmer Rouge). 6.025MHz at 1300-1400; 7.350MHz at 2330-0030; 9.440MHz at 1300-1400 and 2330-0030; 11.780 and 11.870MHz at 0900-1100; 15.110 and 17.680MHz at 0400-

0500; 15.480MHz at 2330-0030. Address: Same as Voice of the National Army of Democratic Kampuchea.

Cambodia - Voice of the Khmer (Khmer People's National Liberation Front and National Union Front for an Independent, Neutral, Pacific and Co-operative Cambodia). 6.325MHz at 2300-0000, 0430-0700 and 1100-1400. Address: PO Box 22-25, Ramindra Post Office, Bangkok 10220, Thailand.

China - Voice of June 4th (Independent Federation of Chinese Students in the USA) via Broadcasting Corporation of China, Taiwan. 7.150MHz at 0615-0800, 1030-1200, 1530-1830 and 2215-0020; 7.250MHz at 0230-0340, 0615-0800, 1030-1200, 1530-1830 and 2215-0020; 11.905MHz at 0615-0800, 0915-0945, 1030-1200, 1530-1830 and 2215-0020; 15.280MHz at 2100-2200. Address: PO Box 15-7939, Chicago, IL 10017, USA.

Colombia - El Pueblo Responde. 6.315MHz at 0030-0115.

Cuba - Radio Marti. 6.030MHz at 0200-0930; 6.070MHz at 0930-1200; 9.525MHz at 2300-0600; 9.590MHz at 1200-1400 and

11.930MHz at 1400-2300. Address: Radio Marti, 400 - 6th St. SW, Washington, DC 20547, USA.

Cuba: La Voz del CID (Cuba Independiente y Democratica). 6.035MHz at 0210-0930; 7.340MHz at 2300-1100; 9.941MHz at 0930-0210; 11.635MHz at 1100-2300. Address: 10000 SW 37th Terrace, Miami, FL 33165, USA.

Cuba: Radio Caiman. 9.965MHz at 1200-1530 and 2300-0400.

Cuba - La Voz de Alpha 66 (Alpha 66) via WHRI, Indiana. 7.415 and 9.495MHz at 2300-0000; 9.495 and 11.790MHz at 1100-1200. Address: PO Box 420067, Miami, FL 33142, USA.

Cuba - La Voz de Fundacion (Cuban-American National Foundation) via WHRI, Indiana. 7.415 and 9.495MHz at 0100-0200; 9.465 and 11.790MHz at 1300-1400. Address: Cuban American National Foundation, PO Box 440069, Miami, FL 33144, USA.


El Salvador - Radio Venceremos (Farabundo Marti National Liberation Front) 6.700MHz range at 1200-1330, 2300-0330. Address: Cuscatlan Communications, 95 Horatio Street, Room 509, New York,



An announcer at one of the first anti-Afghanistan stations to go on the air after the USSR invasion. Radio Free Kabul operated only on f.m.

Former US President Ronald Reagan is welcomed to a convention of the Cuban American National Foundation, which airs La Voz de Fundacion over WHRI short wave from Indiana.



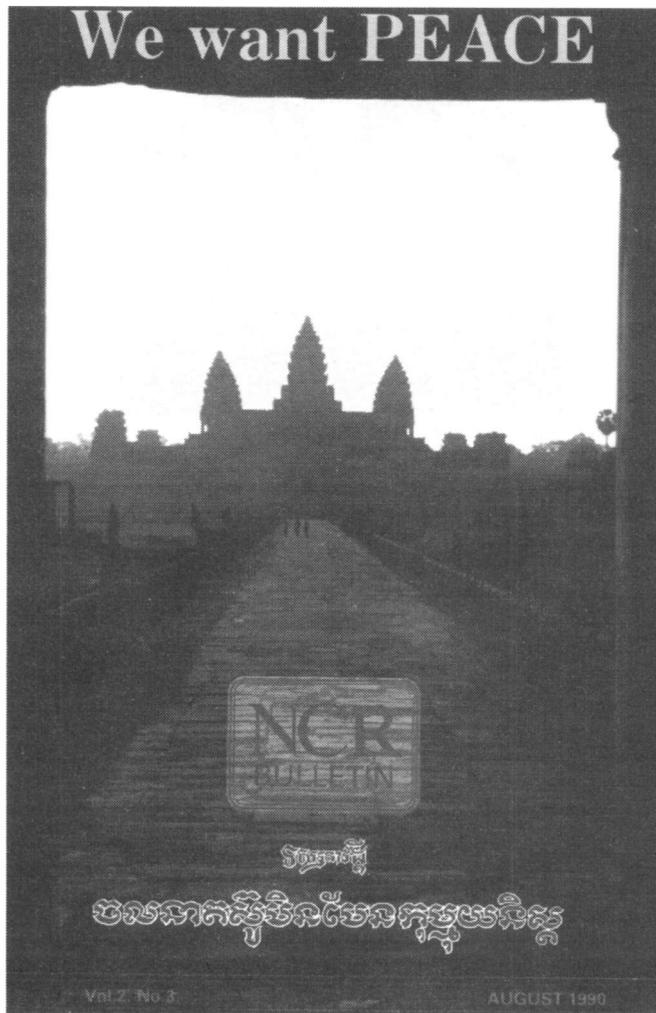

The Non-Communist Resistance operates Voice of the Khmer.

NY 10012, USA.

El Salvador - Radio Venceremos (FMLN, as previous). 3.500 and 6.300MHz range at 0015-0115, 0200-0315, 1215-1315 and 1830-1915. Address: As Previous. Note: The current status of these two stations is uncertain - there have been no reports of reception recently.

Estonian SSR - Radio Hope, aka Radio Nadezhada (believed operated by Soviet Armed Forces). 12.055MHz at 0430-0600, 1030-1200 and 1630-1800.

Ethiopia - Voice of the Broad Masses of Eritrea (Eritrean People's Liberation Front). 3.712, 3.940, 7.020, 7.485 and 10.020MHz at 0400-0700, 0900-1100 and 1400-1700; 6.944, 7.010, 7.830, 7.890, 9.311, 9.343 and 14.305MHz at 0400-0445 and 1945-2030. Address: National Guidance Department, Sahel Eritrea, PO Box 671, Port Sudan, Sudan.

Ethiopia - Voice of Eritrean Liberation. 5.038 and 6.150MHz at 1500-1600.

Ethiopia - Voice of the Tigre Revolution (Tigre People's Liberation Front). 6.944MHz at 1500-1630; 7.010MHz at 1900-2030; 7.830 and 9.311MHz at 0400-0500, 1500-1630 and 1900-2030; 7.886 and 9.335MHz at 0530-0615 and 1530-1615.

Ethiopia - Voice of Ethiopia on the Path to Democracy (Ethiopian People's Revolutionary Party). 7.01MHz at 0330-0400 and 1430-1500; 9.400MHz at 1430-1500. Address: PO Box 710358, Dallas, TX 75371, USA.

Ethiopia - Voice of the Ethiopian People for Peace, Democracy and Freedom (Ethiopian People's Revolutionary Democratic Front and Ethiopian People's Democratic Movement). 7.880 and 9.335MHz at 0430-0530 (Sunday to 0500); 7.905 and 9.320MHz at 1900-2000 (Sunday to 1930).

Ethiopia - Voice of the Broad Oromo Masses. 7.886 and 9.320MHz at 0400-0430 and 1500-1530MHz.

Ethiopia - Voice of Oromo Liberation (Oromo Liberation Front). 9.540MHz at 1500-1545 and 1900-1945.

Iran - Voice of the Communist Party of Iran. 3.888MHz at 0315-0445, 0430-0600 (Friday) and 1700-1900; 6.410MHz at 0315-0445 and 1700-1900. Address: OIS, Box 50040, S-10405 Stockholm, Sweden.

Iran - Voice of the Iranian Revolution (Iranian Communist Party). 3.888, 4.475, 6.415 and 7.0800MHz at 1430-1530. Address: As Voice of Communist Party shown previously.

Iran - Voice of the Feda'i (Iranian People's Feda'i Guerrillas). 4.107MHz at 1700-1800; 4.160MHz at 0200-0300 and 1600-1700; 6.645 at 0300-0445. Address: ACA, BP 43, F-94120 Fontenay-sous-Bois, France.

Iran - Voice of the Worker (Iranian Revolutionary Worker's Organisation). 4.16MHz at 0300-0530, 1430-

1530 and 1730-1830.

Iran - Voice of the Struggle of Iranian Kurdistan. 4.185 and 5.0800MHz at 0330-0430, 0800-0950 and 1530-1620.

Iran - Radio Iran Toilers (Iranian Tudeh Party). 4.775, 6.2300 and 10.870MHz at 0230-0330 and 1530-1830. Address: PO Box 49034, S-10028, Stockholm, Sweden.

Iran - Iran's Flag of Freedom Radio (Front for the Liberation of Iran). 9.045 and 11.620MHz at 0330-0530; 15.100MHz at 0645-0730, 1400-1445 and 1630-1825; 15.565MHz at 0330-0530 and 1630-1825. Address: Postboks 103, DK-2670, Greve Strand, Denmark.

Iran - Voice of the Iraqi People. 7.000MHz at 1400-1445.

Iraq - Voice of Free Iraq (Coalition-run). 9.570, 9.995, 15.600 and 17.960MHz at 1300-0100.

Korea - Voice of National Salvation (Front for Saving the Nation). 3.480MHz at 0200-0700, 1000-1700 and 2000-0100; 4.120MHz at 1000-1700;

4.457 and 6.960MHz at 1000-1700 and 2000-0100.

Korea - Radio Echo of Hope. 3.985MHz at 0900-1200 and 1400-1700; 6.348MHz at 0200-0500.

Laos - Radio of the Government for the Liberation of the Lao Nation. 10.200MHz at 0100-0300 and 0700-0900.

Libya - Voice of the Libyan People (National Front for the Salvation of Libya). 9.450MHz at 1900-2100; 11.825MHz at 0400-0600 and 1600-1800. Address: Al-Inqad, 323 S. Franklin, Box A-246, Chicago, IL 60606-7093, USA.

Libya - Voice of the People aka Voice of the Libyan People's National Movement (Libyan People's National Movement). 9.450MHz at 2200-0000; 11.825MHz at 1800-2000.

Morocco - La Voz de Sahara Libre (Polisario Front) via Radio Algiers. 9.640 and 15.215MHz at 2200-2300. Address: BP 10, El Mouradin, Algiers, Algeria.

Myanmar - (Burma) Voice of the People of Wa State. 5.110MHz at 1130-1330.

Myanmar - Voice of DAB (Democratic Alliance of Burma). 7.137MHz at 0130-0330.

Palestine - Al Quds Radio (Popular Front for the Liberation of Palestine-General Command). 5.990 and 15.050MHz at 0600-1100 and 1300-1700. Address: PO Box 2574, al-Ghubayri, Beirut, Lebanon.

Palestine - Voice of Palestine (Palestine Liberation Organisation) via Radio Algiers. 11.715 and 17.745MHz at 1700-1800. Address: PO Box 411, Luanda, Angola.

Somalia - Radio SM (Somali National Movement). 6.305MHz at 1500-1700.

Sri Lanka - Voice of Eelam (Eelam People's Liberation Front). 7.010MHz at 0230-0330 and 1300-1330.

Sudan - Radio SPLA (Sudan People's Liberation Movement). 9.550 and

Feature

1.110MHz at 1100-1200 and 1300-1400.


Yugoslavia - Radio Libertas (Croatian Committee for Human Rights). 9.465 and 21.840MHz at 1600-1700. Address: 1174 Clarkson Road North, Mississauga, Ontario L5J 2W2, Canada.

And that's the lot. Currently, anyway. Remember that all schedules and frequencies can be highly variable. It's safe to say that no-one has ever heard all the clandestine stations in operation at any given time but, with concentrated and persistent listening the average DXer should be able to log many of the stations on this list. Good Hunting!

Clandestine Information Sources

There are several continuing sources of news about clandestine stations. Here are some suggestions.


Clandestine Stations List, published periodically by the Danish Shortwave Clubs

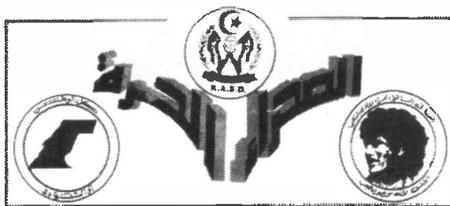

The Polisario Front runs a radio station and produces a monthly publication. Material from Unita's US PR agency.



UNITA'S FIGHT FOR FREEDOM
Evolution of the Political and Military Situation in Angola. 1980-86

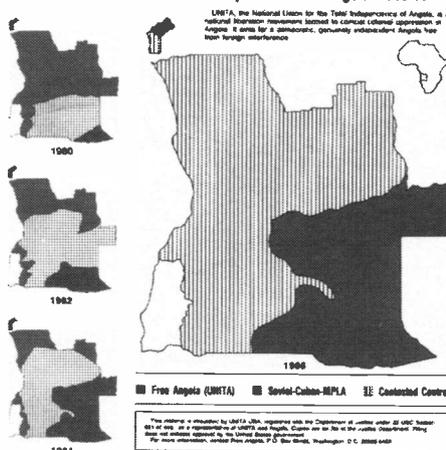

International. 7 IRCs from DSCWI, Tavlegar 31, DK-2670, Greve Strand, Denmark.

Clandestine Calling, published by Shortwave Press Service, Weender Str 3, D-3400 Gottingen, Germany. Monthly. 24DM, \$US17/year.

Clandestine Confidential Newsletter, RR4 Box 110, Lake Geneva, WI 53147, USA. Issued every other month. \$US13/year.

*The A*C*E* (Association of Clandestine Enthusiasts). Monthly bulletin that also includes pirate radio, numbers, etc. \$US25/year from PO Box 11201, Shawnee Mission, KS 66207-0201, USA.

Clandestine Communique monthly column in *Popular Communications* magazine, 76 North Broadway, Hicksville, NY 11801. Subscription \$US24/year (surface mail).

Media Network, the Radio Netherlands DX programme is also recommended for excellent coverage of breaking clandestine broadcasting news.

SHORT WAVE MAGAZINE PCB SERVICE

Printed circuit boards for SWM constructional projects are now available from the SWM PCB Service. The boards are made in 1.5mm glass-fibre and are fully tinned and drilled. All prices quoted in the table include Post and Packing and VAT for UK orders.

Orders and remittances should be sent to: **PW Publishing Ltd, FREEPOST, Enefcio House, The Quay, Poole, Dorset BH15 1PP**, marking your envelope **SWM PCB Service**. Cheques should be crossed and made payable to PW Publishing Ltd.

When ordering please state the Article Title as well as the Board Number. Please print your name and address clearly in block capitals and do not enclose any other correspondence with your order. You may telephone your order using Access or Visa. A telephone answering machine will accept your order outside office hours.

Please allow 28 days for delivery. Only the p.c.b.s listed here are available.

Board	Title of Article	Issue	Price £
SR008	Experimental VHF Receiver	Jul 91	5.81
SR007	VLF Receiver	Dec 90	5.24
SR006	Medium Wave AM Radio	Nov 90	3.34
SR005	R210 Converter	July/August	6.87
SR004	PRO-2004 Modifications	Oct 89	6.63
SR003	HF to VHF Converter	Aug 89	5.22
SR002	Weather Satellite Reception	Jun 88	3.88



Telephone orders: (0202) 665524

THE UP-TO-DATE NEWS & INFORMATION SERVICE FOR THE LISTENING ENTHUSIAST

RADIO LINE

0898 654676

UPDATED EVERY SATURDAY

RADIO LINE

*Calls charged at 34p per minute cheap rate,
45p per minute at all other times.*

COME AND SEE US AT THE LEICESTER EXHIBITION ON OCTOBER 25 & 26

LEICESTER AUTUMN SALE

WE MUST BE THE LARGEST UK STOCKIST OF ALL MAJOR BRANDS

DIAMOND ANTENNA

D505 ACTIVE AERIALS 1.5MHz - 1300MHz
£69

ONE AERIAL DOES IT ALL!
Just think one aerial for all your receivers. Both have built in matching circuits at the base of the antenna to provide high gain performance!


Mobile Aerial D505
This aerial covers everything from long-wave to VHF. It is no larger than a conventional mobile aerial measuring just 29.5" long, fits any standard mobile mount and comes complete with cigar lighter lead and matching box with RF gain control.

Base Station Aerial D707
Beautifully made from fibre glass, this rugged aerial will fulfil all your needs whether it be HF, VHF, or UHF. It comes complete with all the mounting hardware for mounting externally.



PL259

D707
£99

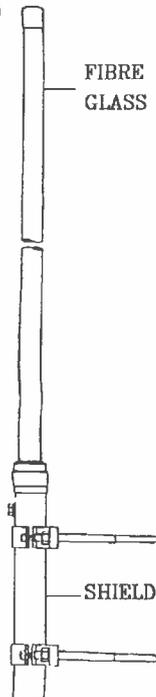

OUR BEST SELLING BOOKS

SHORT WAVE LISTENERS CONFIDENTIAL FREQUENCY LIST Bill Laver. Covering the services and transmission modes that can be heard on the bands between 1.635 and 29.7MHz New 1991 Ed. **£8.95**

THE COMPLETE VHF/UHF FREQUENCY GUIDE 1991 Edition This book gives details of frequencies from 26-2250MHz with no gaps and who uses what. Recently updated, there are chapters on equipment requirements as well as antennas, etc. **£5.95**

THE SECRET OF LEARNING MORSE CODE Mark Francis Designed to make you proficient in Morse code in the shortest possible time, this book points out many of the pitfalls that beset the student. **£4.95**

MARINE UK RADIO FREQUENCY GUIDE Bill Laver A complete guide to the UK s.w. and v.h.f. marine radio networks. Useful information, frequency listings and the World Marine Coastal Phone Stations **£4.95**

HF OCEANIC AIRBAND COMMUNICATIONS 3rd Edition Bill Laver HF aircraft channels by frequency and band, main ground radio stations, European R/T networks and North Atlantic control frequencies. **£3.95**

THE POCKET GUIDE TO RTTY & FAX STATIONS Bill Laver Just updated. Invaluable to all data users, information includes Embassies News Media, Military Marine aircraft etc. **£3.95**

MORE BEST SELLING RECEIVERS

- MVT-6000 25-550MHz + 800-1300MHz Base unit 240V/12V.....£249
- AOR-2000 500kHz-1300MHz Hand-held NO GAPS.....£259
- HP-2000E 500kHz-1300MHz Hand-held NO GAPS.....£259
- R2000 Kenwood super short wave receiver.....£599
- R5000 Kenwood top range super sensitive receiver.....£895
- FRG8800 Yaesu short wave receiver.....£649
- ICR71E Icom super top performer.....£875
- ICR72E Icom's budget short wave receiver. Lovely.....£659
- HF225 LOWE Not prettier but does it perform! Great.....£425
- ICF2001D SONY No other portable can touch it!.....£289
- SW7600D SONY The smallest truly portable SSB/AM.....£149

REAL HANDHELD SCANNER AERIALS!

IMPROVE YOUR SCANNER
Dual Band Transceiving Aerials!
That are cut on 144,
300, 430, 800 & 900MHz.
Both BNC up to 5.5dB Gain



RH900 RH700

YOUR SCANNER DESERVES THE BEST

ORDER NOW!

49cms long RH900 - £29.95
18.5cms long RH700 - £16.95

Phone us a week before the Leicester show to reserve your goods at the

SPECIAL SHOW PRICE.

Do not be disappointed because we have sold out of the goods you wanted. Buy in confidence from the same firm that most of you have been dealing with for 19 years.

Send stamp for our 'ALL NEW CATALOGUE' and price list.

YUPITERU SCANNERS

ASK FOR 'SPECIAL SHOW PRICES'




New Low Price
£229
MVT-5000

The MVT-5000 is still available and covers 26-550/800-1300MHz.

If you don't mind missing the TV band, this model has to be one of the best ever scanners built. Its sensitivity is still unbeaten and its construction and reliability is legendary. **FREE CHARGER!**

The NEW MVT-7000
1MHz-1300MHz

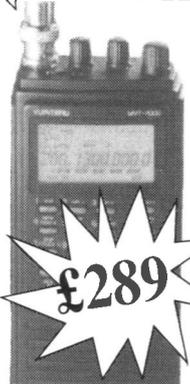

£289

- AM-NBFM-WBFM
- Multiplesteps
- Better than 0.5µV
- 200 Memories
- Rotary Dial
- S-meter
- Fast Scan Speed
- Lockout/Priority
- NiCads
- Charger/AC PSU
- 12V Lead



The NEW VT-125 AIRBAND MK-II.

- 108-142MHz AM
- Better than 0.5µv
- Ultra compact
- 25kHz Steps
- 30 Memories
- Super audio
- NiCads
- Charger
- 12V DC

£169

Where does our equipment come from?

This is a question that you may be asking yourselves before you part with your hard earned cash. We are the official U.K. importers for ALINCO, MICROSET, YUPITERU, TEN-TEC, DIAMOND, AZDEN, TONNA, ADONIS, REVEX, SAGANT, CREATE & GLOBAL. We are Authorised Distributors for KENWOOD, ICOM, STANDARD, FAIRMATE, YAESU, NRD, SONY, PANASONIC, JAYBEAM, G-WHIP, DEE-COMM, SEM, SHINWA, AOR, AKD, ERA, BEARCAT, BLACK JAGUAR, SKY-SCAN, AEA, PAC-COMM, DAIWA, KENPRO, TOKYO & DEWSBURY. Nothing we sell is grey imported by us and we can therefore give you full confidence in our products and after sales service. See us at the Leicester exhibition and let us help you make the right choice at a competitive price!

Waters & Stanton BEST PRICES!

Retail and Mail Order: 22 Main Road, Hockley, Essex SS5 4QS. Tel: (0702) 206835/204965 Fax: (0702) 205843
Retail Only: 12 North Street, Hornchurch, Essex. Tel: (04024) 44765
VISA & ACCESS MAIL ORDER. 24 Hour Answerphone. Open 6 Days a Week 9am-5.30pm
Rail: Liverpool St./Hockley or District Line/Hornchurch

NEVADA...EVERYTHING!


UK's Largest
Distributor of
Scanning Receivers

YUPITERU

VT 125 UK AIRBAND RECEIVER

- A new and powerful pocket size air band radio that leaves the competition standing. Covers all the new UK airband frequency allocations.
- Covers 108-142 MHz
 - 30 direct entry memories
 - Search, scan and keyboard operation
 - Search steps 25.50, 100 kHz
 - Very sensitive receiver
 - Pass and delay functions
 - Supplied with UK charger

£179

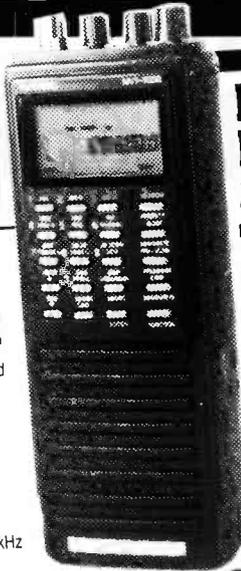

MVT 7000 HANDHELD

The latest in a family of Three...!

- Frequency Coverage From 8 to 1300MHz... (100kHz - 1300MHz at reduced sensitivity)
- 200 Memory channels
- Rotary or Keypad Frequency Control
- AM FM Narrow & Wide FM Modes
- Large Easy Read Display with Signal meter.

£289

Every set comes complete with: Full set of high power ni-cads, telescopic antenna, 240Vac mains charger, DC power lead and carry strap.

£299



MVT 6000

Base/mobile scanner • 25-550, 800-1300 MHz.
• 100 mem very sensitive receiver



FAIRMATE

As the UK distributor for Fairmate we are constantly working with them to update and produce new features and models.

FAIRMATE HP2000

- Continuous Freq. Coverage from 100kHz to 1300MHz
- 1000 Channels of memory
- Keypad or rotary control
- AM, FM and Wide FM Modes
- Search steps from 5kHz to 995kHz

EVERY SET COMES COMPLETE WITH: Full set of high power ni-cads, 2 antennas, carrying case, earphone, DC cable, belt clip, strap & charger.

£269



NEVADA MS1000

- Modes:- AM / FM / WFM.
Freq Range:- 500kHz - 600MHz, 805MHz - 1300MHz.
- Switchable Audio Squelch
 - Tape Recorder Output Socket
 - Auto Signal Operated Tape Recorder Switching.
 - All metal case for improved EMC compatibility.


ALL THIS AND MORE FOR JUST **£279**

COMMUNICATION RECEIVERS

HF225 SHORTWAVE RECEIVER

Covers 30kHz to 30MHz
Receives all modes (FM optional)

£425

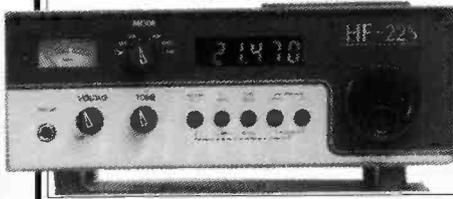

£765

AR3000

Top of the range desk scanner
100kHz to 2036 MHz with no gains.

IN STOCK NOW!

SCANNER ACCESSORIES

LOW NOISE PRE-AMP

These new Pre-Amplifiers are a must for the scanner enthusiast and will allow reception of signals that were inaudible without them.

MODEL M75

For base and handheld scanners

- 25-2100 MHz
- Low noise GaAs FET.
- Selectable filters for improved performance.
- Variable Gain Control. **£69.95**

MODEL M100

Same spec as M75 but with full RF switching, may be used with transceivers on transmit up to 5 watt o/p power. **£79.95**

MODEL M50


A new low cost pre-amp without filters or gain control. Offers low noise GaAs FET at 20 dB fixed gain. **£49.95**

DIAMOND D707 ACTIVE ANTENNA

(500kHz - 1500MHz) A base antenna with 20dB pre-amp. Approx 3.5ft fibreglass with mounting kit...£99.00
D505 mobile version...£69.00

MASTHEAD ANTENNA SWITCH

Select 2 antennas at the masthead remotely from one cable.
Frequency:- DC to 1.3GHz
Connectors:- N Type
£49.95



AOR RADIOS

We carry the full range of AOR products including these new models:-

- AR2800 (500kHz - 1300 MHz) base/mobile with SSB£395
- AR2500 (5 - 550MHz) (800 - 1300MHz) 1984 memories£419

WIDEBAND ANTENNAS

- WB1300 Discone our own high quality Top on The Range Stainless Steel Ant (25 - 1300 MHz) with 'N' connector.....£49.95
- Micro Scan Low Cost But Effective Wideband Ground Plane Antenna (180 - 1300) MHz£12.00
- Sky Band Economy Stainless Discone Covering 25 - 1300 MHz (PL259 connector).....£24.00
- Mobile Scanner Ant covers (50 -1300) MHz Complete with Magnetic Mount.....£27.90

The PSU 101 MK11 allows convenient use of any Handheld scanner at home. It will both charge and power your scanner from the mains whilst providing a convenient desktop stand. Suitable for many models including:- Fairmate HP100, HP200, HP2000, AOR 1000, 2000, Yupiteru MVT 7000, MVT5000, Uniden 50XL, 70XLT, 200XLT etc.

£29.50



NEVADA COMMUNICATIONS

189 London Road, North End, Portsmouth PO2 9AE


FOR THE RADIO ENTHUSIAST

SONY RADIOS


We stock the complete range of Sony shortwave products - Here is a selection of the popular models.

IFC 2001D

Full coverage shortwave, VHF and airband radio. (150kHz-136MHz). Receives AM, FM, SSB. **£229**



SW 7600

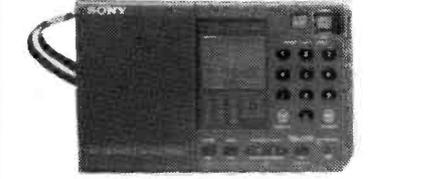

A new pocket shortwave radio covering:- 150kHz-30MHz AM/SSB 76kHz - 108MHz FM **£149**

ICF SWIE Pocket SW plus VHF radio **£149**

AIR 7 Very sensitive airband H/held radio **£229**

PRO 80 Shortwave/VHF H/held radio **£299**

AN 1 An external active antenna with built-in pre-amp covers. (150kHz-30MHz) **£49.95**

★ Call John Gordon our Sony specialist for more details of these or any other models of interest.

NEW RADIOS FROM KENPRO

KENPRO KT22

The economy 2mtr H/held with a full 2.5W output.
 ■ 144 - 146 MHz Full 2Mtr coverage
 ■ Simplex and duplex
 ■ Simple Thumb Wheel frequency selection
 ■ 1750 Hz tone burst for repeater access
 ■ Complete with charger & accessories



£139


KENPRO KT44

Price Breakthrough for the New Novice Licence....

NEW 70CMS LOW COST HANDHELD

■ 430 - 439 995 MHz full band coverage
 ■ 2.5W or 0.5W switchable output
 ■ Full UK repeater operation
 ■ Sensitive receiver
 ■ Complete with charger, nicad ear piece, belt clip and strap

£159

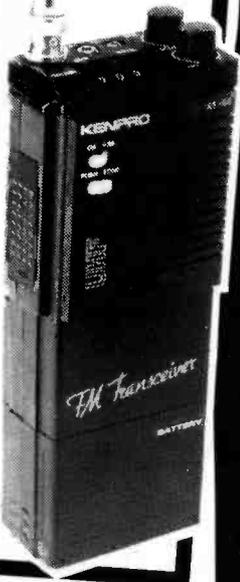

KENPRO KT220

Complete 2mtr handheld with extendable receive coverage.
 ■ Full keypad frequency entry
 ■ Built in clock and timer facility
 ■ 2.5W 0.5W output
 ■ Single strength meter
 ■ Scan 10 memory channels
 ■ Complete with charger, nicad ear piece, belt clip and strap

£238

icom

We are one of the leading ICOM stockists carrying the full range of Receivers and Antenna Radio equipment. For help or information call Paul Morton our ICOM Specialist Now!

IC R7100

Covers 25 - 2000 MHz with all mode capability. Includes 900 memory channels with 5 different scan functions. Automatic record function. **£ CALL**



IC R72

Covers kHz - 30 MHz all modes (FM Optional). 99 memory channels and 10 dB pre - amp fitted as standard. **£663**



IC R 7000

Icons most popular communications receiver covers 25MHz to 2 GHz with 99 memories and all mode reception... **£ CALL**

IC RI

Pocket size Wideband handheld scanner covers 150 kHz to 1300 MHz with 100 memories. **NEW LOW PRICE... £359**



- IC-R1 Scanning Rx (New Low Price) £365
- IC-W2 New Dual Bander Nicad/chrgr £395
- IC-2SRE New 2m H/Held + wideband Rx £425
- IC-4SRE New 70cm H/held + wideband Rx £445
- IC-4SE 70 cms FM H/Held £295
- IC-4SE/T 70 cms Keypad DTMF £299
- IC-2SE 2 mtr H/held Nicad/chrgr £275
- IC-2SE/T 2 mtr H/Held Keypad DTMF £295
- IC-24E/T Dual Band H/Held £385

Bearcat DX 1000


Digital Short Wave Receiver
 10 kHz - 30 MHz
 all mode 12 volt receiver supplied with mains adaptor. **£325**



Steeplestone Specialist Radios

MBR7 Multi Band 'Jumbo' Radio

Covers MW, LW, SW (2.3 - 22 MHz)
 FM (88 - 108 MHz)
 Airband (108 - 136 MHz)
 Marine Band (136 - 176 MHz)
 Mains or Battery Operation.
 **£59.95**



MBR10 Multi Band Radio/Cassette

Covers same range as MBR7 above plus built in clock & cassette. **£69.95**

SAB 9EP Aircraft Radio Pack

This specialist 'Aircraft Enthusiasts' pack contains SAB9 AirBand Radio. Set of headphones. ALL FOR JUST **£19.95**



Books

- Air Traffic Radio (1991 Edition) £3.95
- VHF/UHF Frequency Guide £5.95
- Flight Routings Guide 1991 £4.95
- Scanners 11 (P.Rouse) £7.95
- Scanners 3rd Edition £8.95
- Marine Frequency Guide £4.95

THE TRADING POST

We have a large selection of used equipment which is constantly changing. Here is a selection - but call to check availability before ordering

- Sony 2001 portable receiver... avg. cond 190.00
- Lowe SRX30 gen cov. receiver ... avg. cond 165.00
- Kenwood TS930S fitted ATU v.g.c. 1095.00
- KDK 2Mtr FM mobile Ideal starter rig 185.00
- Sony Air7 Portable airband and VHF 175.00
- Yaesu FT2700 Dual band Mobile...boxed...vgc 345.00
- Kenpro FM240 2Mtr mobile,boxed...as new 185.00
- Sony PRO80 H/held shortwave and vhf receiver 225.00
- Sony SW1E Pocket receiver, with acces 99.00
- Heathkit 101 HF rig with all manuals...g/cond 250.00
- SX200 16ch. base scanner am/fm switchable 125.00
- Yaesu FT101ZDFM imac.cond. with am/fm fitted 500.00
- Yaesu FR50B Ham bands only receiver...v.g.c. 99.00
- AOR 950 Desktop scanner boxed as brand new 175.00
- *Realistic PRO 30 10ch. h/held scanner 100.00
- Yaesu FT270H 2Mtr 45w mobile FM 195.00
- CT1600 C/With BS25 Docking booster 150.00

Send £2 for our Latest Bumper Catalogue of Amateur, CB and Scanning Equipment



HOTLINE 0705 662145

FAX 0705 690626

FAST MAIL ORDER
 All orders received before 4pm despatched same day.

USE YOUR CREDIT CARD for same day despatch



The ultimate base - mobile scanning receivers from AOR



AR3000 *widest range monitor...*

The AR3000 now extends your listening horizons further than anyone believed was possible. Covering the entire frequency spectrum from **100 kHz to 2036 MHz** without any gaps in the range, the AR3000 brings the general coverage receiver to a new level of performance and versatility.

Not only will the AR3000 cover this extremely wide range, it will allow listening on any mode: **USB, LSB, CW, AM, FM (narrow) FM (wide)**.

Tuning rates are selectable from an ultra-fine 50 Hz step for SSB and CW, right up to 100 kHz steps for the TV bands and Band-2. A slight pull on the spring-loaded rotary tuning control will increase the tuning speed by a factor of ten for really fast tuning.

400 memory channels are provided arranged in 4 banks x 100 channels. Each memory channel will retain mode, frequency and RF attenuator setting.

15 band pass filters are used before the GaAsFet RF amplifiers, this ensures high

sensitivity throughout the entire range with outstanding dynamic range and freedom from intermodulation effects. An RS232 port is provided to enable remote operation by plugging directly into most **personal computers**. The AR3000 is supplied with a telescopic whip aerial, 13.8V DC lead, AC power supply and operating manual.

ACEPAC3 *PC control for the AR3000...*

This exclusively developed multi-function IBM-PC based program further increases the versatility of the AR3000. A sweep facility provides a spectrum analysis graph. The very latest version displays frequencies in X axis and squelch opening percentage on each frequency in the programmed frequency search range. This indicates 'how active' the frequencies are in the programmed search range. In addition to the graphic display, ACEPAC3 can produce a detailed numerical list from the graphic information. One memory file has 400 channels divided into 4 banks of 100 channels. More than one memory file can be created to increase the memory storage capability. If you make just one extra memory file you can store 800 memory channels!

AR2002 LAST PRODUCTION SPECIAL OFFER £399 INCLUDING VAT Carriage by post £5.00 extra

An end of production stock clearance provides the opportunity for you to acquire the high performance AR2002 wide coverage receiver at an attractive price. The AR2002 is a superb choice for the first time purchaser, combining performance with ease of operation. The business user or enthusiastic listener will appreciate the excellent strong signal handling characteristics (very important in urban areas or hill-top locations), high sensitivity and good selectivity. The AR2002 is a versatile unit covering a range of applications including airband, marine, amateur band, professional monitoring etc. If you already have a receiver, perhaps now is the time to consider buying your standby or second set.

Two frequency bands are employed 25 - 550 MHz and 800 - 1300 MHz. Reception modes are AM, FM (narrow) and FM (wide). Typical measured sensitivity (FM narrow), is better than 0.35 uV and is largely maintained across the tuning range. Increments for tuning and searching are available in 5, 12.5 and 25 kHz.

Control of the AR2002 is via a positive (non membrane) keypad. UP-DOWN frequency change is also available through a conventional rotary tuning control. External computer control is possible through the rear connector, the levels are not RS232 so a small interface is required (available from Garex Electronics).

Twenty memory channels are provided, with easy keyboard entry and recall. Each memory channel stores frequency and mode information without restrictions. The memories can be recalled manually or scanned in sequence for easy and enjoyable listening. A programmable search facility is provided. The complete frequency coverage of the receiver can be scanned in 5 kHz, 12.5 kHz or 25 kHz steps. If desired two limits, one high and one low can be programmed by the user and searching is possible upward or downward. The speed of scan and search is selectable in two speeds. A delay facility may be switched to cope with the slight delay encountered when listening to simplex communications. Memory one may be used as a priority channel being monitored every two seconds. Front panel readout of information is by liquid crystal display (LCD) which provides frequency, increment, delay, channel lockout and even a real time clock. A bar graph signal indicator allows comparative measurements to be made, this also helps with direction finding. The AR2002 is powered from 12 - 14V DC. The set is supplied with a suitable mains adaptor, DC lead, telescopic aerial and operating manual.



Also available: AR2000, AR2800, AR2500, DA3000 etc. For a complete set of leaflets and price list please send a S.S.A.E. (34p).

Please phone for a list of participating dealers.

AOR™ AOR (UK) Ltd.
Room 2, Adam Bede High Tech Centre,
Derby Road, Wirksworth, Derbys. DE4 4BG.
Tel: 0629 - 825926 Fax: 0629 - 825927 E&OE

Switched Attenuators

While re-reading Brian Oddy's 'Starting Out' article on antenna attenuators, Phil Townsend decided that the networks could be built onto a rotary switch without too much effort. So he set about building and trying out various switched attenuators.

Brian Oddy has mentioned that he was not in favour of a potentiometer used as an antenna attenuator, feeling that it could damp down any coil connected to it. As my a.t.u. had a potentiometer attenuator, I was on the look-out for some effective means of replacing it.

Whilst re-reading Brian's 'Starting Out' article in the July '89 *SWM*, I realised that the three attenuator networks he shows could be built on a two-pole, six-way rotary switch, as Cambridge Kits do with the component coils in their a.t.u. kit.

Setting to work, I found making-up a switch with the networks, plus a by-pass position, not difficult, although some neat workmanship was required.

Replacing the potentiometer in the a.t.u. with the switch was no problem, so I began testing it for effectiveness. Almost immediately a problem occurred. The effectiveness of the networks was irregular. Selecting the 10dB attenuator provided a satisfying drop of the "S" meter needle, but 15dB returned the needle some of the way, while 20dB restored some of the lost

attenuation. A check of the network connections on the switch for short circuits revealed nothing, so, having no other ideas as to the cause of the irregularity, I was very firmly stuck.

Fortunately, a day or two later, I picked up my November '89 copy of *Practical Wireless* and found the answer in S. Niewiadomski's article on 'Passive Attenuator Networks'. I had earthed the attenuator networks to the a.t.u. aluminium box via a solder-tag trapped under the switch. Earthing the networks, as Niewiadomski advises, to the braid of the cable carrying the signal to and from them, corrected the irregular behaviour.

An extended test with the 1980 vintage Lowe SRX 30 communications receiver, found Brian's set of attenuation values to be not quite what I needed for the SRX, so a second switch was made up, still using Brian's 10 and 20dB networks, but adding 5 and 40dB values from the 50Ω section of Table 2 in Niewiadomski's article.

It was with some apprehension that the decision was taken to install this

second switch in the SRX, as a replacement for the RF GAIN control. Switching-on the receiver resulted in some alarming noises from the loudspeaker, but they were quickly found to be due to the a.t.u. controls being incorrectly set.

A second extended test, with the first variable switch in the a.t.u. by-passed, left a feeling that attenuation values in between those selected, would be handy, so the a.t.u. switched attenuator values were changed to 5, 10 and 15dB. Installing the two switches has provided a couple of benefits - increased performance from the a.t.u. and an increase in sensitivity of the SRX30. The previously flat 'L' and 'Pi' circuits in the a.t.u. can now be peaked on the l.w. band (via an SEM l.w. to 28MHz converter), while the Parallel and Series circuits have sharper peaks. The increased sensitivity of the SRX is most noticeable on the m.w. band. It is such that, for the first time, a m.w. loop antenna, with its directional properties, is needed to separate those stations on the band that share the same frequency.

Prompted by Brian Oddy, I

have been looking out for any effects of r.f. leakage from the switches. Within my limited knowledge and experience of radio, I am not aware of any. Neither switch is positioned close to other components, so perhaps there are none. With the RF Gain control removed from the SRX, the stability of the set came into question, but a check through the receiver's tuning range for any instability revealed none.

Construction

A two-pole, six-way rotary switch is required. I felt it wise to use resistors of 5% or better tolerance for the networks. The switch has a stop-washer and it's as well to check that the washer is correctly placed and then make a note of its position. The poles, lettered on the switch body A & C, are for the input and output of the device. To facilitate connecting up later on, a short piece of insulated wire, about 50mm long, was soldered to each. For the straight-through connection tags 1 & 7 are linked with a very short piece of insulated wire, keeping the wire down on the switch body to save space. The series resistor (R2) of the lowest

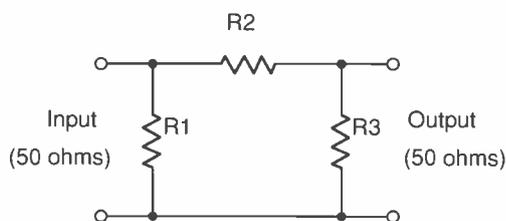


Fig. 1: Basic Pi section attenuator. For resistor values see Table 1.

Table 1

Attenuation (dB)	R1 (Ω)	R2 (Ω)	R3 (Ω)
5	180	33	180
10	100	68	100
15	68	140	68
20	62	240	62
40	47	2700	47

Note: these values are only good for 50Ω input and output impedances.

Project

value attenuator was fitted next, using tags 2 & 8. After centralising the resistor's body between the tags, the leads were soldered and any excess cut off. The series resistors of the other attenuator networks, in ascending order, were similarly fitted, care being taken avoid short circuits.

The resistors to chassis or earth (R1, R3) were dealt with by gripping one lead close to the resistor's body with thin-nosed pliers and bending the lead to form right-angle with a not too sharp bend. I began with one of these resistors forming part of the network with the highest attenuation value. The bent lead of the resistor was shortened so that, after soldering to one or the other of the tags carrying the network's series resistor (R2), the earthy resistor's body would be snug and at a tangent to, the switch's ring of solder-tags. Then working in order and away from this resistor, the other earthy resistors were similarly fitted, bearing in mind that the long lead of each resistor would be soldered to the one preceding it, (extending a lead if necessary), thereby forming a loop round the outside of the made-up switch. The long lead of the earthy resistor first fitted, will be the one to be connected to the signal cable braid and so earth all the attenuator networks. Before forming the loop, I checked each network with the multimeter to ascertain that its total resistance was in close agreement with what it should be, each set of resistors being, until connected to the others,

in series. This check being satisfactory, the long leads were connected to form the loop. Last, but not least, the completed switch was closely inspected for short circuits.

Each switch needed a minimum space of 40mm diameter by 25mm high. Installation gave no problems, but I did remove the locating pillar so that the switch could be rotated to bring the earthing lead to the most convenient point for connecting to the signal cable braid.

Using the Attenuator

My use of the variable attenuator switch is governed by the SRX 'S' meter needle's desire to spend most of its time in the region over S9. With the a.t.u. and SRX switches in their by-pass positions, the wanted frequency is tuned. Using the receiver's switch, sufficient attenuation is introduced to bring back the 'S' meter needle to below S9. The receiver and a.t.u. controls can now be adjusted for best reception and then sufficient attenuation switched out to enable the signal strength to bury any receiver noise.

For an initial set of attenuator networks, I found Brian's three choices excellent. I would, however, suggest one more of 5dB. To avoid having to make up the 140Ω (R2) resistor in the 15dB network, I substituted one of 150Ω. After some use it will become apparent if other values would be more suitable for your receiver.

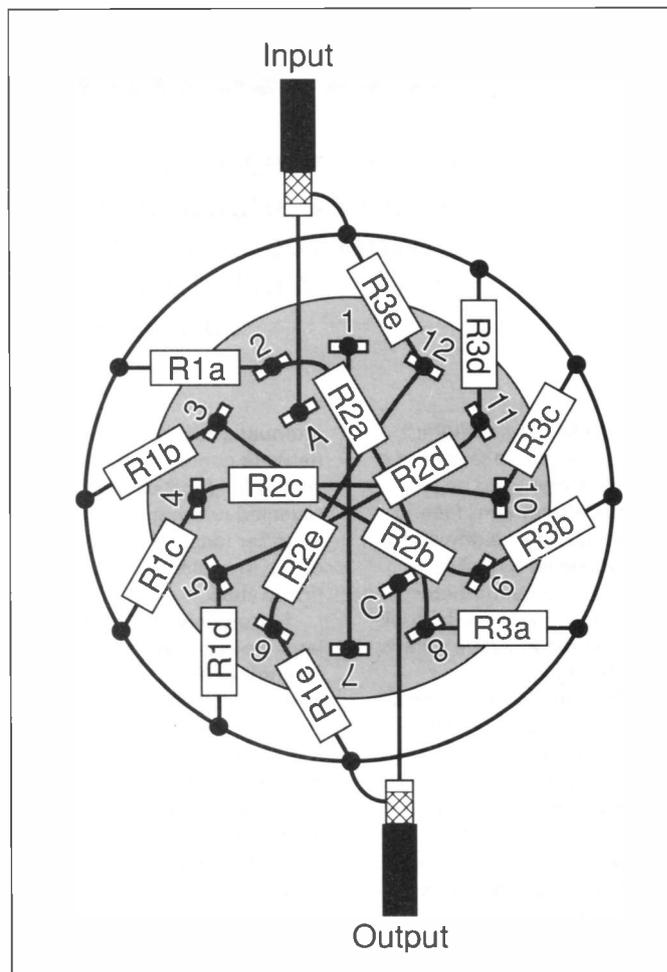


Fig. 2: The resistor positioning and connections for the attenuator switch.

Conclusions

After many hours spent using the SRX 30 and a.t.u. equipped with the attenuator switches, I have had to conclude that the attenuators make tuning the SRX too precise a business to put up with. Accordingly, the switches have been removed and the original potentiometer RF Gain control re-installed. One attenuator switch is now installed in my 'back-up' receiver, a valved Codar CR 70A, Mark 2: where it has proved to be a satisfactory addition.

From my experience a set of attenuators may or may not suit a particular receiver. Therefore, before installing a switch, it should be temporarily connected to check that it will be of benefit. ■

Copies of *Short Wave Magazine* July '89 and *Practical Wireless* November '89 are available from the Editorial Offices price £1.85 each inc. P & P.

South Midlands Communications Ltd.

Southampton (0703) 255111 Leeds (0532) 350606 Chesterfield (0246) 453340
Birmingham 021-327 1497 Axminster (0297) 34918

RECEIVING O.K.?

IF NOT, WHY NOT CONTACT SMC FOR INFORMATION ON OUR COMPLETE RANGE OF RECEIVERS AND SCANNERS.



The **FRG9600**, a premium scanning receiver covering 60-905MHz, SSB, CW, AM & FM modes. 99 memories. 5, 10, 12.5, 25 & 100kHz scanning steps. Keyboard frequency entry. Optional converters to extend range from 0.15-30MHz and 800-1300MHz.



The **FRG8800** HF communications receiver. A better way to listen to the world. Continuous coverage from 0.15-30MHz optional module for VHF coverage from 118 to 174MHz. SSB, CW, AM & FM modes. Direct frequency entry keyboard.

Yaesu's serious about giving you better ways to tune in to the world around you. And whether it's for local action or world-wide DX, you'll find our HF/VHF/UHF receivers are the superior match for all your listening needs. When you want more from your receivers, just look to Yaesu. We take your listening seriously.

SMC are pleased to be able to offer the SONY range of Multiband Receivers. They feature all the latest technology allowing unequalled coverage of both broadcast and shortwave bands, yet remaining both compact and easy to use. All the models illustrated cover VHF broadcast, SW broadcast, and some models cover other bands as well.

The **ICFSW7600** is a sophisticated portable receiver that combines power and flexibility with one-touch convenience. Freq. range AM 150-29995kHz and FM 76-108MHz.

The **ICFSW1E** is possibly the world's smallest shortwave radio, fully featured with a multiple tuning system and PLL synthesised circuitry for digital precision. AM 0.15-30MHz & FM 76-108MHz.

The ultimate Multiband receiver, the **ICF2001D** combines sophisticated shortwave technology with the ease and versatility of both digital and analogue tuning. Freq. range AM 0.15-30MHz, FM 76-108MHz and AIR 116-136.6MHz.



The **ICFPRO80** is a handheld professional receiver with air band capability and an 8-way tuning system. Frequency coverage 150kHz-108MHz and 115.15kHz to 223MHz with FRQ 80 frequency converter.

The **Air 7** is an all purpose handheld multiband receiver with continuous waveband coverage including air band and utilising a 6-way tuning system AM 150-2194kHz, FM 76-108MHz, Air 108-136MHz and PSB 144-174MHz.



The compact **HX850E** is a basic scanner with a few memories. Ideally, suitable for a novice in the scanner market. AM/FM modes and a frequency coverage of 60-89, 118-136, 140-174 and 406-495MHz.



The **NRD525** is a high-class, general coverage receiver with expandability looking to the future. Combining traditional technology unique to JRC with the most advanced digital technology gives superb performance whilst remaining extremely easy to use. The NRD525 covers 90kHz-34MHz and with an optional VHF/UHF converter also covers 34-60, 114-174 and 423-456MHz. Modes of operation CW, SSB (USB/LSB), AM, FM and RTTY with optional demodulator.

The **HP200E MkII** is a 1000 channel, programmable, handheld scanner. AM, FM and FM wide for commercial channels covering 500kHz-600MHz and 805-1300MHz. Supplied complete with NiCad charger, Antennas, DC cable, shoulder strap, outclip, carry case and ear-piece.



The **Bearcat 200XLT** is the cream of the Bearcat handheld scanner range. With 200 memory channels and simple operation these are proving very popular. Freq. coverage 66-88, 118-174, 406-512 and 806-956MHz.



The **AIR HANDY** is a compact thumbwheel controlled handheld receiver. Light in weight and easy to use makes it an ideal introduction to receive. The AIR handy covers 118-136MHz and is AM.

The **Low receivers are available from Reg Ward & Co Ltd. Some Icom receivers available from most branches.**



- Free Finance on selected items, subject to status. Details available on request.
- Up to £100 instant credit, a quotation in writing is available on request, subject to status.
- Yaesu Distributor Warranty, 12 months parts and labour.
- Carriage charged on all items as indicated or by quotation.
- Prices and availability subject to change without prior notice.
- Same day despatch wherever possible.

Southampton (0703) 255111
SMC HQ, School Close,
Chandlers Ford Ind. Est
Eastleigh,
Hants SO5 3BY.
9am - 5pm Mon-Fri
9am - 1pm Sat

Leeds (0532) 350606
SMC Northern,
Nowell Lane Ind. Est.
Nowell Lane,
Leeds LS9 6JE
9am - 5.30pm Mon-Fri
9am - 1pm Sat

Chesterfield (0246) 453340
SMC Midlands,
102 High Street,
New Whittington
Chesterfield,
9.30am - 5.30pm
Tues-Sat

Birmingham 021-327 1497
SMC Birmingham,
504 Alum Rock Road,
Alum Rock,
Birmingham B8 3HX,
9am - 5.00pm Tues-Fri
9am - 4pm Sat.

Axminster (0297) 34918
Reg Ward & Co. Ltd.
1 Western Parade,
West Street,
Axminster,
Devon EX13 5NY.
9.00am - 5.20pm Tues-Sat

50 Countries on the 144MHz Band

Part 5

Early radar experiments showed that signals sent from earth were being reflected back to earth by the moon - albeit with an enormous loss in signal strength. Radio amateurs were, as usual, quick to exploit this new means of v.h.f. propagation. As far back as 1953, successful two-way contacts were made via the moon on 144MHz. Since then, this form of propagation has proved to be reliable on even higher frequencies.

Basically a signal from earth is deliberately squirted out into space, strikes the moon and is reflected at a tangent to some other place on earth. It sounds simple, but I can assure you that it is anything but simple. The moon is close by solar standards, but still too far away in everyday distances. It is an average of 384 000km away and there is a vast loss in wave energy over this distance to start with. Additionally, the moon is not a good reflector of radio signals - most of the radio energy reaching the moon is absorbed, leaving approximately 7% to be reflected or deflected elsewhere. Then the remaining energy has to travel the 384 000km back to earth.

There is a loss of about 380dB on an earth-moon-earth (e.m.e.) path, so an inordinately large amount of e.r.p. has to be generated to overcome this loss. This entails the construction of high gain antennas, typically in the order of 25dBd gain, and high power. The DTI will, on being satisfied that you are genuinely going to be attempting e.m.e. experiments, issue a special licence authorising the use of high power, it is possible that the normal legal limit of 400W at the antenna may suffice if the antenna gain is sufficient.

Difficult Target

Now, with a big antenna system and high power, the problems do not decrease, the moon, seemingly big to young lovers and poets, is actually quite small, a mere 3476km in diameter and its average distance takes up only 0.5° of the celestial orb. It is now obvious that it is a difficult target to locate accurately without recourse to lunar orbit data, and of course it is moving, orbiting around us whilst we are orbiting the sun and also spinning on our own axis. When the feeling of giddiness passes it will be realised that the antenna must not only need to be pointed at the moon, but will need to have azimuth and elevation control in order to remain firing to the right direction, and as the beam width of a high gain antenna is quite

narrow, this control must be accurate or the signal will miss the moon entirely. Due to the spinning effects, the signal is better if the antenna is circularly polarised, and the reflected signal is in the opposite polarisation - the problems mount.

Earth-moon-earth propagation is only possible when the moon is above the horizon, but when everything is right, distances of more than 15 000km can be achieved, not counting the path to the moon and back. The fact that you may only see part of the moon illuminated

does not matter. A narrow crescent moon suspended in the sky does not mean that only the part you can see is there - believe me, it's still complete, just not illuminated. Remember also that the moon is visible during the daylight hours as well. In fact, some of the prime times for e.m.e. communication are in the mornings when the moon is 30° high in the western sky, providing the correct angles for signals sent from Europe to reflect at a tangent to the Americas.

Although sideband can be used, the major mode of transmission is Morse. Most contacts are pre-arranged after consultation of lunar charts or computer data, and a careful check at the low end of the 144MHz band may give you some indication that some one is trying this system of communication. You may find

nothing but admiration for that dedicated small group of enthusiasts who have perfected their skills in achieving such outstanding contacts.

Delight

There we have it, five forms of propagation on 144MHz. There are others, variations of these five, but a slight understanding of the basic forms will, I am sure, allow the listener a surer chance of hearing long distance signals on this band. Propagation on the v.h.f. bands, although reasonably well understood, still holds a deal of delight to the keen listener. An extended tropo duct opening may allow you to hear 15 different countries within a few hours. A big auroral event and you may hear 20 different countries. Sporadic E will

Possibly the most esoteric form of v.h.f. propagation has been left to the last part of this series. P.E.W. Allely GW3KJW lets us into the secrets of communications via the earth's original satellite, the moon.

very loud Morse signals around 144.010MHz either calling CQ or calling some exotic long distance amateur say in the United States. If you do not possess an antenna system comparable with Jodrell Bank, and a receiver with a signal to noise ratio that only advertising blurb can equal, the chances of hearing anything from the New World is remote, but not impossible. However, it is a form of communication worth monitoring, I once heard part of the callsign of a W5 for a fraction of a second and have never forgotten it. I have

spring surprises with signals possibly from North Africa coming in at loud signal strength, or the band filled to overflowing with Romanians and Greeks. Occasionally there is a mix of propagation modes when unaccountably 144MHz decides to throw even bigger treats. I remember one day in June 1989 when there was a strong aurora in the afternoon and early evening, followed incredibly by a Sporadic-E opening in the late evening and another time during the Persids meteor shower in August, when an extended tropo opening

meant that many contacts made with difficulty on meteor scatter were repeated with ease a few hours later.

Other Disciplines

It will be seen that listening for the rare signals on v.h.f. is not merely a matter of switching on and sitting back - the interesting study of astronomy and meteorology becomes mandatory.

One of the facets of our hobby is that it leads to an understanding of other disciplines, opening up new and fascinating lines of study. I have experienced many years of happy listening on the v.h.f. bands, and many hours of intense frustration having completely failed to hear that elusive country. Still they all come in time and, as I have tried to explain, luck does not

always work, you are listening because you have correctly forecast that such an opening may occur.

The discerning listener will obviously want to get the most out of his receiver, so I

would recommend that, no matter how good your receiver is, performance will be vastly improved by installing an antenna as high and as much in the clear as possible.

A 9-element Yagi is not very big at 144MHz and no more obtrusive than a Band II f.m. antenna. It should be capable of being rotated though 360°, and ideally should be connected via good quality low-loss connectors, and equally low-loss coaxial cable. If finances permit, the addition of a GaAsf.e.t. masthead pre-amplifier will make all the difference between hearing a faint signal and just hearing noise.

Finally, remember that your antenna is better horizontally polarised. I wish you success in listening and you may hear those fifty different countries on the 144MHz band.

Abbreviations

e.m.e	earth-moon-earth
MHz	megahertz
km	kilometres
dB	decibels
dBd	decibels referenced to a dipole
e.r.p.	effective radiated power
DTI	Department of Trade & Industry
W	watts
CQ	general call
v.h.f.	very high frequency
f.m.	frequency modulation

Tidy up that pile of mags!

0202 665524  

SWM BINDERS Only £5.50 each

(plus £1 p&p for one binder, £2 p&p for two or more, UK or overseas)

Are you tired of sifting through cardboard boxes and carrier bags to find that useful item in SWM?

Our smart binders, covered in blue plastics, are a must for your library, keeping your radio magazines in good condition and easily accessible.

Plus!


Tidy up those other mags too. Plain binders to take any A4 size magazines - no names, no pack drill !!!

HOW TO ORDER

Send a postal order, cheque or international money order with your order stating number and type required to **PW Publishing Limited, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP.**

Payment by Access, Mastercard, Eurocard or Visa also accepted on telephone orders to Poole (0202) 665524. Normally despatched by return of post but please allow 28 days for delivery.

Prices include VAT where appropriate.

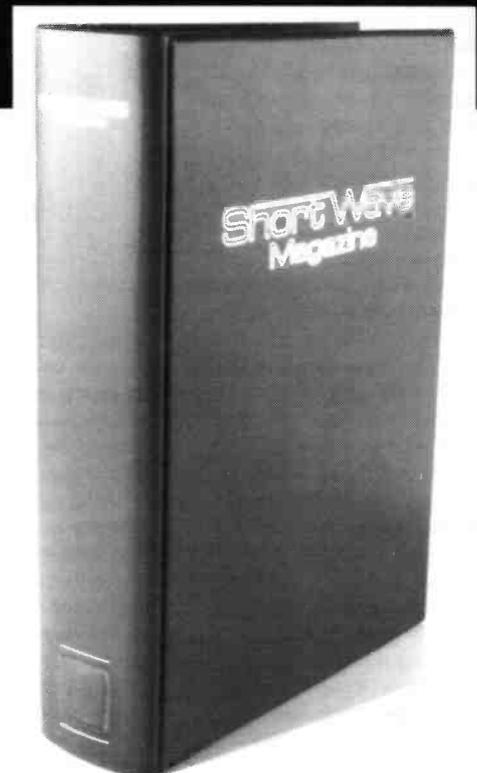

Audio Video Care ROBERTS SHORT WAVE RADIO

R808



Multi-band FM/LW/MW/SW Digital pre-set stereo battery world radio. Packed with features such as "Tri-colour display for frequency, pre-set channel-time, signal and battery strength PLUS lock sleep and stereo indication. The R808

has 5 tune-in methods, 45 pre-sets, dual time display, stand-by and clock alarm, giving tremendous performance and value. SW1.711-29.999MHz (18-pre).

£112.00

LOWE AR2000

Hand Held Scanner 500kHz - 1300MHz AM & FM narrow. FM wide, 1000 memories, 10 search banks. Supplied case, charger and aerial.

£259.00

SONY ICF SW7600

High performance portable receiver with PLL synthesizer circuitry and continuous AM frequency coverage.

LW/MW/FM/SW/SSB Reception - PLL Synthesized Circuitry - FM Stereo - continuous AM Frequency Coverage - 4 Way Tuning - Sleep Function - Digital Clock - Programmable Timer - 2 Step Tone Control - Antenna Input Socket - Headphone Socket-Key Protection - LCD Display - Dual Conversion System - Supplied with Compact Antenna, Stereo Earphones and AC Power Adaptor - Power: 4xAA size batteries, 6V DC, 240V AC with adaptor (supplied).

£150.00


SHOWROOM
7 Langley Road
Watford, Herts.
Phone
(0923) 245335

MAILORDER
(0727) 864162
Prices include
VAT & P/P

**SHOWROOM
MAIL ORDER**
110 London Road
St Albans
Herts AL1 1NX

Receiving Weather Satellite Images?

With six systems to choose from, we have the system to run on your Amiga, Archimedes, BBC or PC compatible computer.

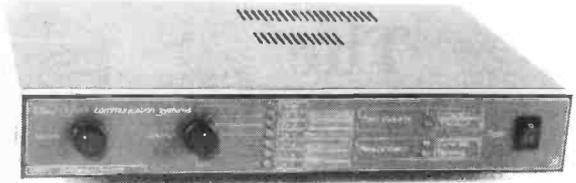

AMIGASAT 2.0 The system for the Amiga computer. This system has many, many features to delight the Amiga owner, too many to list but there is a demo disk available for just £5 inc.

DIGISAT for PC owners this package offers some superb features including unlimited animation, print-dump, 800 x 600 VGA images, auto-downloading of images, temperature readout, and lots more.

GRAPHSTORE a 1/2-Meg video framestore/graphics processor unit for use with the BBC/Master micros. With the accompanying software package it enables BBC owners to enjoy the highest resolution images (512 x 512 x 128 greyscale). Includes zoom, scroll, print-dump, and animation.

Which ever software/interface option you choose, they are all compatible with our standard range of receiving hardware - for full details, and prices write or call for our 1991 catalogue.

martelec communication systems

8 Kimber's Lane, Farnham, Surrey GU9 9PT

Tel/Fax: (0252) 737620

DEWSBURY ELECTRONICS

NEW

EASY READER DM-1000

NEW

Introducing the all new 'EASY READER DM-1000' RTTY/CW DECODER.
In our opinion "the most simple to use decoder ever seen".

- RTTY BAUDOT 45/50/75 BAUD
- CW SPEED 2-99 WPM
- RTTY ASCII 10 and 200 BAUD
- AUTOMATIC OR MANUAL SPEED SELECTION
- ON SCREEN TUNING INDICATION
- STATUS LINE ON SCREEN GIVING MODE, SPEED IN USE AND PRINTER ON/OFF
- OUTPUT TO VIDEO MONITOR AND PRINTER (CENTRONICS/PARALLEL)
- OPTIONS: UHF TV OUTPUT RS-232 OUTPUT



£199.99 inc VAT p&p £5.00
SAE for full details.

Stockists of DIAWA - VIBROPLEX - ICOM - YAESU - KENWOOD - JRC - WAVECOM

**DEWSBURY ELECTRONICS, 176 LOWER HIGH STREET, STOURBRIDGE,
WEST MIDLANDS DY8 1TG**

Tel: (0384) 390063/371228 Fax: (0384) 371228

Instant finance available subject to status. Written details on request.

When it comes to deals Lôok to Lowe

The R-2000 From Kenwood



The R-2000 fitted into the middle of the Kenwood receiver range between the R-600 and the R-5000. Sadly the R-600 is no longer with us - "Gone, gone and called me Mother"; but the R-2000 goes on from strength to strength because of its unique appeal to a wide-ranging section of the listening fraternity.

The R-2000 is the receiver that bridges the difficult gap between the user who wants to listen to world-wide broadcasts from the comfort of his armchair and the keen listener who likes to hear aircraft on HF SSB across the Atlantic; or perhaps CW from the other side of the world. The R-2000 can truly be said to satisfy the listening needs of almost everyone.

Kenwood have always excelled at making complex equipment easy to use, so the control layout is logical and self-explanatory. If you want to tune the receiver, turn the knob. If you want to tune slowly, press the button marked 'Slow'. If you want to get somewhere in a hurry, press the 'Fast' button. Do you want to change mode? Simply select, using the soft touch buttons. Recall something from memory? Touch the appropriate button. Scan the memories? Press M.SCAN. And so it goes on, displaying Kenwood's design skills which have come from listening to the users and giving you what you need.

The R-2000 covers 150kHz to 30MHz and receives SSB, CW, AM and FM. There is also an optional internal VHF converter to extend the receiver's coverage to include 118MHz to 174 MHz; again with all mode reception. This makes the R-2000 an extremely comprehensive listening tool, particularly for the keen aircraft listener because you can follow aircraft progress on VHF during take-off and climb, and then continue to listen on HF SSB when the flight is handed on to Oceanic Control.

I still get a kick from hearing 'Speedbird Concorde' telling control that they are flying at some incredible altitude, at equally impressive speed and with an outside air temperature guaranteed to bring tears to the eyes of the proverbial brass monkey.

The size of the speaker in the R-2000 is evident from the photograph and Kenwood's involvement in the high quality sound equipment field certainly shows in the audible results. The audible quality from the R-2000 is very good indeed and worthy of recording - for which purpose you have a tape recorder jack and a built-in digital timer which not only switches on the R-2000 but will control the switching of the external tape recorder. Just the thing if you want the latest American football results but you also need to be in bed at the same time.

The hobby of short wave listening really began in this country as, indeed, did broadcasting itself. As a result, the UK listener has a long tradition of being able to get the best from the "all pervading luminiferous ether" (to quote a 1920's publication). The R-2000 brings modern technology to those skilled listeners and enables them to get the most from the hobby.

The best thing to do is to visit one of our Regional Centres and give this lovely receiver a good workout; but if you are unable to do that a detailed leaflet is available on request. Better still, enclose four 1st class stamps for our 'Listener's Guide' (see opposite page) and request full details on the R-2000.

R-2000 Receiver £599.00 (inc VAT)
VC-10 VHF Converter £165.00 (inc VAT)

SPECIAL OFFER FOR LIMITED PERIOD

R-2000 Receiver £549.00 (inc VAT)
plus a FREE magnetic long-wire balun (worth £36.00)

THE LISTENERS' BOOK OF THE YEAR Just a few of the 1991 edition to clear from stock!

£5.95 (plus £1.55 post & packing)

"The Passport to World Band Radio" contains everything you need to know about listening to the amazingly diverse world of radio broadcasting. There are almost two hundred pages listing all the short wave broadcasters; not simply in order of frequency but also by language, country of origin AND the times of the broadcasts. That information on its own makes the book worthwhile, but in addition you have detailed reviews and comment from an acknowledged and respected authority covering forty radio receivers. You also get over a hundred pages of general news, views and information. The 'Passport' is an absolutely indispensable companion to the short wave listener. Excellent value at this special price; but be quick if you want one!

LOWE ELECTRONICS LIMITED

Chesterfield Road, Matlock, Derbyshire DE4 5LE Telephone: 0629 580800 Fax: 0629 580020

When it comes to deals
Look to Lowe

The "LEICESTER" Deals

(until the end of November)

Two record-breaking scanning receivers
at the best no-nonsense prices around

AR-3000 - The Ultimate Scanning Receiver



Normal price:
£765 inc VAT



- Continuous coverage
100kHz - 2036MHz
- Dual VFOs
- 3000 Memory Channels
- Optional 'SCAN'
IBM-PC software

The low Lowe 'Leicester' price: £649

AR-2002 - The Scanning Receiver that beats the rest on genuine performance



Normal price:
£487 inc VAT



- Coverage: 25-550MHz;
800-1300MHz
- Modes: AM/FM/WFM
- Memory Scan
- Frequency Scan/Search

The low Lowe 'Leicester' price: £387

Colour brochures available on request. If you did not come to to the exhibition at Leicester, pop in to one of our centres local to you and try out these incredible scanning receivers. Great products at even better prices! Buy locally from the company you can trust technically.

Barry (S Wales): 0446 721304 *Bournemouth: 0202 577760 Bristol: 0272 771770 Cambridge: 0223 311230
Cumbernauld: 0236 721004 *Darlington: 0325 486121 London (Heathrow): 0753 545255 London (Middlesex): 081-429 3256

*Closed all day Monday

2LO is calling again

Jack Hum G5UM traces the history of a famous callsign

Back in the mists of radio time - and that means approximately the first dozen or so years of the present century - there existed in the British Isles a few Hundred 'wireless enthusiasts' who talked among themselves almost entirely by Morse code with spark transmitters and four-figure wavelengths. Note 'wireless' and 'wavelengths' - the words radio and frequencies were many years into the future. They used three-letter callsigns, often self-allocated.

When peace broke out in 1918 and Amateur Wireless Permits were available once again, the transmitting enthusiasts were faced with some startling changes. For one thing, the callsign structure as they had known it was no more: the new post-war callsigns were to consist of numeral plus two letters. For another thing, an esoteric device called a thermionic valve had appeared - and esoteric it remained for several years for the very good reason that most domestic receivers did not use it. It was too costly. In the hard years post-WWI the burgeoning horde of broadcast listeners used crystal detector receivers.

Learning Thermionics

Thus the British 'wireless experimenter' found himself obliged to become *au fait* with this revolutionary technical development, the more particularly because in the Transmitting Permit issued to him - still condescendingly 'Permit', not Licence - it was emphasised that the use of spark was expressly forbidden. These experimenters took valves into their stride just as today's enthusiasts master microwaves and microcircuits with seemingly little effort.

Much could be unfolded about the onset of valve technology, but that must be a story to be told another time. Our present remit is to tell how the new callsign structure came into existence and to look particularly at one of the most famous of them - 2LO. It belonged to the London station of the British Broadcasting Company (the


BBC became a corporation five years later) and 'LO' came to be synonymous with London. It was one of many self-evident callsigns which the licensing authority of the time were in the habit of issuing (the licensing authority was the GPO, which then had a monopoly of electrical communications within these islands). A self-evident callsign was one which could be related phonologically to its holder's name and 2LO was one of them.

'But wasn't 2LO an amateur callsign?' the reader may well ask. Answer: it was at that time an amateur-sounding one but professionally used. The GPO's habit in the 1920s was to issue figure plus two letter callsigns to amateur and professional alike. A callsign list of the period shows 2LO sandwiched between two wireless experimenters, 2LN in Lancashire, and 2LP in south London.

Precursor to 2LO was another amateur-sounding callsign, 2MT. It belonged to a Marconi experimental station at Writtle in Essex, and its callsign could be transliterated as Marconi Telegraph (MT). Its purpose was to give the burgeoning body of wireless enthusiasts something to listen to. Its characterful prime-mover was Captain P.P. Eckersley, an entertainment in himself, who was later to become Chief Engineer of the infant BBC.

Neither 2MT nor 2LO was alone in the quasi-amateur commercial callsigns of the 1920s. Others included 2AA of the Radio Communications Company in Slough, 5AA held by the Leicester Mercury, 2KH of the Ashley Wireless Telephone Company at Liverpool. Even the London & North Western Railway at Crewe made sure it got a callsign.

It is more than likely that many of the amateur type callsigns issued to commercial companies were applied for in the hope that their holders would be allowed to undertake

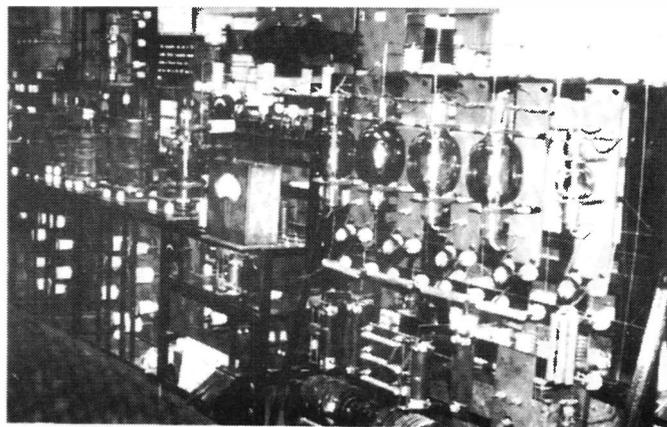

Since the G2LO callsign appeared in the Callbook it has been transferred to the BBC Engineering Transmission Department at Warwick. There is a new QSL card to go with the move showing the original '2LO' London transmitter, operated by the BBC from 1922 to 1925.

broadcasting. This had come about in the United States. There virtually any undertaking prepared to provide programmes over the air could do so. At that time there were already hundreds of them in The States.

Not so in Britain. One organisation, the BBC (still a company like the other callsign holders) was charged with the duty to provide broadcast programmes for the populace. Not many hours a week to start with, but gathering more air time as the decade progressed.

Flagship

Its flagship was '2LO, the London station of the British Broadcasting Company', operating from its headquarters in Savoy Hill, a narrow street stretching from London's river uphill to The Strand. This new miracle of communication, as it was perceived at the time, earned hundreds of column inches in the newspapers of the period, truly a newsworthy and headline grabbing development.

At 2LO a modest transmitter feeding an antenna on the roof of 2 Savoy Hill was supplanted, before long, by a much more ambitious array on the roof of Selfridge's

famous store in Oxford Street. It was good publicity for Selfridge's, as it was one of the sights of London to a 'wireless mad' public.

Its coverage was little more than the Greater London metropolitan area. The populace at large, enthused by what it read in the newspapers, wanted a share in 'this modern miracle'. To meet the demand the BBC set in train an engineering project to provide what were to be called Main Stations in the kingdom's larger cities. Many of these were once again allocated self-evident callsigns. Glasgow's 5SC could, with a little imagination, be deemed to have a Scottish burr. And where could 5WA be sited except in Wales (covering Cardiff, but not much signal up the valleys and beyond)? Newcastle was 5NO, but there seemed less 'self-evidence' about 2ZY for Manchester or 5IT for Birmingham.

Service areas, even of these 'main stations', were restricted. Soon, relay stations were established to fill in the gaps as far as the techniques of the time permitted - and many of the gaps remained quite extensive. The relays - a few hundred watts by contrast with the Main Stations with their kilowatt or two - did not

Feature

originate programmes: they relayed what was offered to them via GPO landline from the main broadcasting centres. They too were allocated self-evident callsigns: 6FL was Sheffield, 6BM Bournemouth and 2EH Edinburgh, to name but three.

When 'the Beeb' became a Corporation in 1927 most of its callsigns were reallocated to amateurs. Appropriately, Glasgow's 5SC went to a radio amateur in Dundee. Sheffield's 6FL went to a distinguished television designer of later years. Some of the ex-BBC callsigns changed hands several times within the transmitting amateur fraternity. But not the most famous of them all, 2LO.

Resurgence

To the generality of British radio amateurs accustomed to talking with stations using numeral plus three letter callsigns, the holders of numeral plus two letter

callsigns appear to them as relics of another age. Not always is this true: at least two of the two-letter callsigns in the current lists belonged originally to the holders' grandfathers. Many examples occur of the handing on of the callsigns of beloved but deceased radio men to their local clubs. At Cambridge G2XV is one. Another is G2NM whose licensee, the late Gerald Marcuse, confounded the sceptical pundits of the 1920s by demonstrating, entirely at his own expense, that Empire broadcasting on short wave was practical. His callsign's continuity is maintained by the Chichester Radio Club, his memory by a plaque on a seat in the churchyard of his south coast home.

When G2LO (the G prefix now mandatory, unlike before the war) appeared on the bands almost simultaneously with G2MT, operators writing them into logs must have thought that these were, well,

just relics. Not so the older generation of radio amateurs. To them history, in repeating itself with the advent of G2LO and G2MT, brought incredulous amazement. 'Could those famous callsigns really be around once again?'. They were indeed! Each was reactivated by a club, G2LO by the Ariel Radio Club, open to BBC employees and G2MT by the Marconi Radio Society.

Appropriately, G2LO was allocated to the Ariel Club's unit at Brookmans Park in Hertfordshire. Here, 55 years earlier, the first ever twin-transmitter installation had been pioneered by the BBC. Its purpose was to make two alternative programmes available to listeners so as to offer a choice not available from the single transmitters in the larger cities. Over the next few years the twin-transmitter service was extended to provide a choice of programmes to much of the population.

A decade before 2LO was

resuscitated another memorable callsign made its debut in an amateur context. Daventry was the home of the BBC's original G5XX long-wave transmitter of 1925, known nationwide as 'Five XX'. Today's G5XX is another Ariel Club callsign. When a 430MHz amateur repeater was established nearby, what better callsign to give it than GB3XX!

Both G2LO and G2MT appeared for the first time in the 1984 RSGB *Callbook*, allaying fears that they had been pinched by pirates! These fears were finally dispelled when QSL cards bearing the hallowed callsigns began to filter through to those operators who had contacted them.

The moral of this tale is: Never treat a two-letter callsign with suspicion. If you hear or work one, identify it in the *Callbook*. You may discover that you are communicating with part of the history of amateur radio. ■

EXTENSIVE RANGE OF RECEIVERS AVAILABLE

RECEIVERS AND SCANNERS:

IC R1 POCKET RECEIVER/SCANNER
IC R100 MOBILE WIDEBAND RECEIVER
AOR 1000 HANDHELD SCANNER

IC 72 GENERAL COVERAGE RECEIVER
IC 7000 MULTIMODE RECEIVER
HF 225 GENERAL COVERAGE RECEIVER

A wide range of mobile and base station antennas, ATUs, power supplies and other accessories available from stock. Full range of Sky Scan products now available.

PACKET TNCs AND DATA TERMINAL UNITS

TINY 2 VHF PACKET	£ 139	TNC320 VHF & HF PACKET.....	£ 199
PK88 VHF/HF PACKET	£ 139	KPC2 VHF/HF PACKET	£ 169
KPC4 DUAL VHF PACKET	£ 247	KAM MULTIMODE	£ 291
DRSI PACKET PC CARD	from £139.00	AMT3 AMTOR/RTTY	£ 179

A large selection of books and magazines always in stock.

JUNGHANS RADIO CONTROLLED CLOCKS & WATCHES

BLACK OR WHITE DIGITAL WITH ALARM.....	£46.50	ANALOGUE MANTEL CLOCK	from £67.50
WALL CLOCKS	from £79	DIGITAL WRIST WATCH	from £159.00

NEW SUPERB ANALOGUE RADIO CONTROLLED WRIST WATCH.
SEND LARGE SAE STATING YOUR REQUIREMENTS FOR FULL DETAILS.

Just some of our many products are listed above. Send an SAE to receive our latest catalogue.

AMDAT

4 NORTHVILLE ROAD, NORTHVILLE
BRISTOL BS7 0RG (0272) 699352

CREDIT
AVAILABLE



NRD Commun Rece



The NRD-535, reviewed here by Mike Richards G4WNC, is the latest from the prestigious JRC range of receivers.

The NRD range of communications receivers from the Japan Radio Corporation (JRC) has established a formidable reputation among short wave listeners. For most, these receivers represent the ultimate in receiver quality. Because of this, any new model must attract more than just a passing interest. Along with its predecessors, the NRD-535 features continuous coverage from 100kHz through to 30MHz. In its basic trim it's also able to resolve all the main modes e.g. s.s.b., c.w., a.m., f.m., RTTY and FAX. This model also includes an RS-232C interface that allows all the main receiver functions to be controlled remotely by a personal computer. So let's look a little deeper to see just what you get for your money.

Instruction Manual

A good instruction manual is essential with a receiver of this level of sophistication, and the supplied unit comprised some 56, A4, pages. The manual followed standard practice by using plenty of illustrations to help clarify the more complex points. I was pleased to see that also included was a full

description of the remote control commands. There was sufficient information for even a modest computer buff to be able to generate their own programs.

The final sections of the manual were devoted to installing optional units and general maintenance. For completeness, this section included a full set of circuit diagrams, though the print size was obviously very small.

My only complaint with the manual was the quality of the English translation. Some sections were particularly obscure. How about "When entering 0 for the display shift mode, the displayed frequency may vary, while the Receiver keeps a signal existing in the centre of the receiving band, once caught, without escaping it, even if the SSB mode is changed." I really think the translation quality could be improved. This is particularly important for the descriptions of the more complex features.

Ins and Outs

The NRD-535 boasts a wide range of external connections designed to satisfy the needs of the specialist listener. Let's start with the power options. In its basic form, the NRD-535 can be operated either from a.c. mains or an external d.c. power source. The standard mains unit is housed inside the receiver and can be set for 100/120V or 220/240V at 50 or 60Hz. The tolerance on these voltages is $\pm 10\%$, so the NRD-535 can effectively handle supplies between 90-132V and

198-264V. This should cope with all the common supply voltages.


The d.c. supply option is primarily designed to take the standard vehicle voltage of 13.8V. However, it can operate between 12 and 16V, so is quite flexible.

There were two options for connecting the antenna. Low impedance coaxial-fed antennas are connected to a standard SO-239 socket on the rear panel, while high impedance wire antennas were connected via a pair of terminals.

An external speaker socket was provided, but instead of the common 3.5mm jack, a phono socket was used. However, this was a switched type that disconnected the internal speaker when a plug was inserted. Keeping with the audio side, there was a very handy line output that provided 0dBm into 600 Ω . This output was duplicated on the front panel as a 3.5mm RECORD jack. As this feed was taken from before the volume control it enabled recordings to be made with the volume turned down. However, it's important to note that the two line outputs were connected in parallel so external devices may interact. Other than the obvious use of making recordings, these outputs are invaluable for connecting auxiliary decoding units or audio processors. The final audio output is the headphone jack on the front panel. This will drive 4-16 Ω units, including stereo headphones.

For those wishing to connect auxiliary equipment there was an external power socket. The only problem was that the output current was restricted to approximately 30mA. This somewhat limits

NRD-535 Communications Receiver

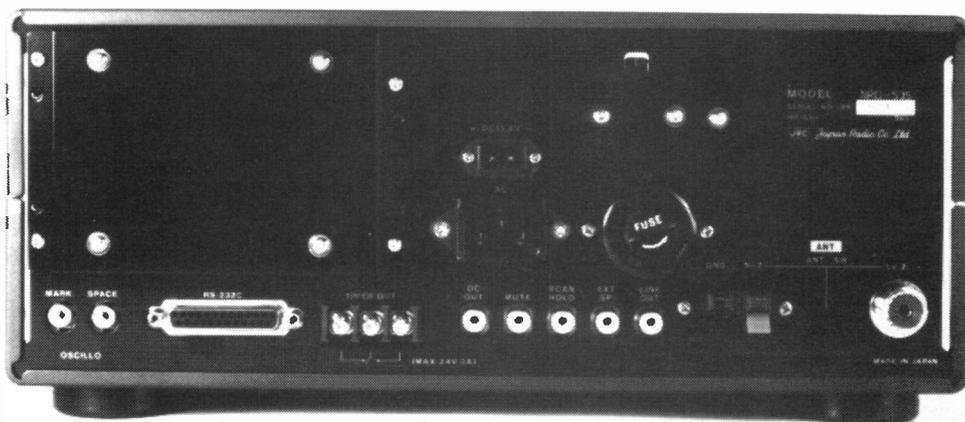

its usefulness.

Other external connections included scan hold, timer, mute and RTTY mark and space - more about these later. Finally, there was a 25-way D-type connector for the RS-232C computer interface.

Operation

One of the notable features of the NRD range of receivers is the very business like layout of the front panel. Despite a comprehensive range of features careful design has ensured that each control is well placed. The main display features a fluorescent unit that gives clear visibility under all lighting conditions. This display includes a very detailed S-meter in addition to the main frequency and channel read-outs. The top section of the display supplied supplementary information such as receive mode, filter data and a number of other options.

Probably the most used control of any communications receiver is the main tuning control. It is therefore very important that this should be well placed and feel good. The NRD-535's tuning knob meets both these requirements admirably. There's plenty of room around the knob and it has a silky-smooth feel. As with most modern receivers, the frequency changed in steps rather than continuously. However, the 1Hz (yes 1Hz) tuning steps mean that the NRD-535's control is about as near to truly continuous as you can get! For times when a faster tuning rate is required, these steps could quickly be set to either 10 or 100Hz. An alternative means of tuning was to use the < and > buttons

that were located immediately above the tuning control. Personally I did not find these to be particularly useful, they were mainly of use when changing operating parameters.

For rapid frequency changes or when selecting a specific station the direct entry mode was excellent. Using this option, the required frequency was typed in on the numeric keypad.

One of benefits of a processor controlled receiver is the ease with which memory channels can be implemented. The NRD-535 boasts a total of 200 user-programmable memories. Each of these can store not only the frequency but receive mode and filter settings even down to the current a.g.c. rate. This adds considerably to the user friendly feel of this receiver. Moving between your favourite frequencies can be achieved with just a couple of key presses.

Closely associated with the memories are the scanning options. These enable automatic monitoring of the memories. The scanning

facilities provided on the NRD-535 are not as comprehensive as can be found on a modern v.h.f./u.h.f. scanner, but are nevertheless very useful. The main feature of the scan is its ability to operate between any two channels monitoring all the intermediate channels. By keeping all associated frequencies together you can increase the effectiveness of the scan. As an example, if you stored all your favourite marine s.s.b. frequencies in consecutive memories you could set the scan to monitor just these memories, so giving a simple overview of that mode.

Storing & Scanning

Storing frequencies in the memory was very straightforward, though you did have to type in the frequency using the numeric keypad as it wasn't possible to transfer a frequency direct from the display to memory. To use the scan effectively you need to first set the squelch control to mute the inter-station noise. Once this has been done the scan will stop

on any channel that has a signal that exceeds the squelch threshold. The speed of the scan is another important aspect and can be adjusted by the user between 0.5s/scan and to 5s/chan. This should cope adequately with all normal requirements. Another useful feature was the option to pause the scan at any point with a single key press. This is particularly handy if you want to continue monitoring an interesting station. One final point with the memories was the provision of a lithium battery to ensure that the memory contents were maintained while the main receiver was powered down. The battery was accessible from the rear panel and was estimated to have a life of about five years.


In addition to the basic scan functions, the NRD-535 featured a sweep facility. This enabled the operator to initiate a sweep between any two frequencies. The steps used for the sweep aligned with that available for the main tuning control, i.e. 1Hz, 10Hz or 100Hz. As with the scan option, the sweep speed could

be adjusted over a wide range which in this case was 0.05s/step to 0.5s/step. The sweep option was particularly useful for monitoring normally quiet bands for activity.

Multi-mode Reception

One of the many areas where the NRD-535 can be seen to be different from many other communications receivers is in the number of receive modes that are supplied as standard. In addition to the conventional s.s.b. and c.w. it features a.m., f.m. FAX and RTTY. You may well be asking what's the difference between s.s.b., FAX and RTTY as far as the receiver is concerned. Well, it's all to do with the frequency range of the demodulated audio. For s.s.b. reception the displayed (carrier) frequency is required to produce a zero beat. However, for FAX reception the displayed frequency needs to create a 1900Hz audio tone. When resolving RTTY the same applies but a 2100Hz. audio tone is needed. Producing these different tones with the same displayed frequency is achieved by automatic adjustment of the local oscillator. The prime advantage of the system used in the NRD-535 is that the received signal is always kept in the centre of the i.f. passband. This enables the operator to make best use of any auxiliary filters. If you attempt to receive a high tone RTTY signal on a receiver without this system you'll actually be receiving right on the edge of the filter bandwidth. In some cases you may even find that one tone falls outside the i.f. passband causing considerable degradation in the received signal.

As you would expect from a receiver of this quality, there were a number of features included to assist with the processing of received signals. Probably one of the most important are those associated with the i.f. bandwidth. In its basic form the NRD-535 featured three bandwidths: 2kHz, 6kHz and 12kHz. These were directly linked to the receive mode, but the operator had the option to vary this using the < > buttons on the

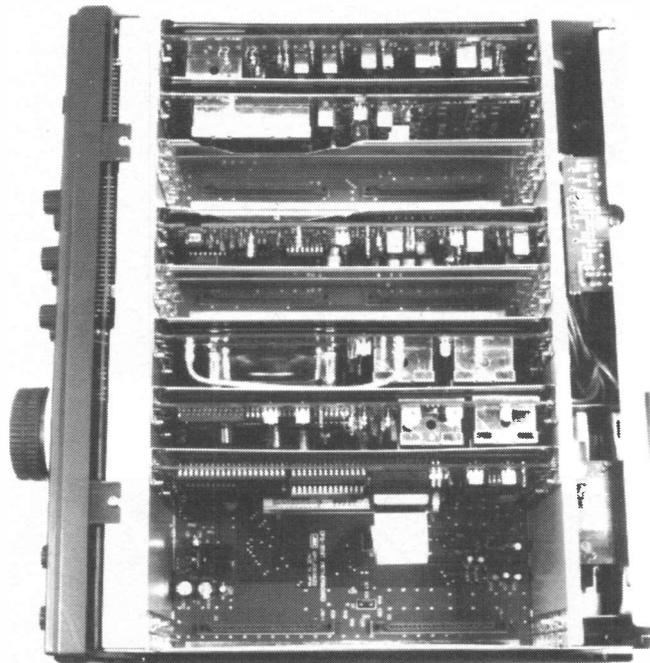

A view inside the NRD-535 showing how much has been fitted into the receiver.

front panel. For those of you with more demanding requirements, optional filters could be fitted in the narrow or auxiliary positions on the filter board. The filters available from NRD included the following bandwidths: 300Hz, 500Hz, 1kHz, 1.8kHz & 2.4kHz. For further processing of the signal at i.f., a Pass Band Shift control was provided. This enables the operator to effectively shift the i.f. passband by up to 1kHz with respect to the received signal. This helps to reduce problems caused by adjacent channel interference. Another common problem experienced on the h.f. bands is heterodyne interference from a signal within the required passband. This can be tackled by using the i.f. notch filter. This gives a 40dB notch that can be adjusted across the i.f. passband. The next processing tool was a very flexible i.f. noise blanker. In addition to having a continuously variable threshold, the blanker characteristic could be switched to cope with either simple pulse interference or the more complex type associated with the Woodpecker.

Technical Overview

I thought it would be interesting to give a brief view of how the NRD-535 handles signal processing.

One of the key areas with any high-quality receiver is the front end filtering - the object being to eliminate all but the wanted signal. The NRD-535 uses a 35MHz low pass filter followed by a diode-switched, seven-band tuner that feeds the first mixer via a second 35MHz low-pass filter and r.f. amplifier. This first section features excellent filtering and helps minimise the risk of spurious responses from later stages. The first i.f. of 70.455MHz is amplified and passed to the second mixer to produce the 455kHz second i.f. It's at this second i.f. that the main i.f. filtering and signal processing takes place. For all but f.m. demodulation a final i.f. of 98kHz is created before demodulation. It's at this final i.f. that the a.g.c. control voltage is generated. Advanced synthesiser techniques are used to supply the local oscillator feeds. One notable point was

that the design was clearly designed around achieving best performance. As a result discrete components have been used in preference to integrated circuits for many of the critical r.f. signal processing circuits. A typical example of this is to be found in the i.f. amplifier where dual gate m.o.s.f.e.t.s are used in preference to an integrated circuit alternative.

Optional Extras

Although the NRD-535 reviewed was the basic specification model, I think it's appropriate to take a look at the range of options that are available.

The first of these is the BWC (Bandwidth Control) which gives the listener a very powerful tool. The facility is controlled via a knob on the front panel and gives continuous adjustment of the receive bandwidth. The adjustment range is from 2.4kHz down to 500Hz so should prove extremely versatile.

For those interested in a.m. broadcast reception the ECSS (Exalted Carrier Selectable Sideband) will prove very useful. This enables the operator to resolve either of the two sidebands transmitted by an a.m. station. The benefit of this system comes when the wanted signal is suffering adjacent channel interference. This type of interference can be greatly reduced by selection of the appropriate sideband.

The utility enthusiast is served by the CMH-530 RTTY demodulator. This can decode standard ITA No. 2 transmissions using shifts of 170, 425 and 850Hz with baud rates between 37 and 75 baud. The decoded signal is available for display on a computer or dumb terminal via the RS232C connector on the rear panel.

Although the stability of the basic receiver is excellent, NRD offer an optional ovened oscillator. This guarantees a frequency stability of ± 0.5 p.p.m. over the temperature range -20 to +50°C and should satisfy the most demanding requirements.

Review

Performance

In the case of this receiver, I've made an exception to my review process and have not carried out full technical tests. The reason is simply that the excellent performance of this receiver has been clearly established by other technical journalists and users alike. Because of this, I limited the technical evaluation to a few spot tests to confirm that the review model was performing within specification. Needless to say it passed these tests with no problems.

From the operators point of

view, I found the layout of the controls to be excellent. With my personal interest in utility decoding, I was particularly impressed with the frequency stability of the NRD-535. This aspect is particularly important when receiving FAX images as each image can take up to 15 minutes. For this reason, it's useful if the receiver can be left unattended to receive a number of consecutive charts. An even more demanding case exists if you utilise the NRD-535's internal timer to trigger unattended FAX reception. The NRD-535 performed

exceptionally well in these conditions and was well within the demanding requirements of FAX reception.

One of the comments often made by those using a high quality receiver for the first time is the apparent quietness of the bands. This is because they are used to hearing lots of spurious signals found in many poor quality receivers. Excellent front-end selectivity, combined with top quality mixers, means that in the 535 spurious responses are kept to an absolute minimum.

Specifications

Frequency	100kHz - 30MHz
Modes	RTTY, c.w., s.s.b., a.m., f.m. & FAX
Stability	±10p.p.m. after 5 minutes ±2p.p.m. after 1 hour.
Frequency step	1Hz minimum
Memories	200
Receiving system	Triple superhet
IFs	70.455MHz, 455kHz and 97kHz
Sensitivity	100-500kHz 14dBμ (24dBμ a.m.) 0.5-1.6MHz 6dBμ (16dBμ a.m.) 1.6-30MHz -10dBμ (6dBμ a.m., -6dBμ f.m.)
Selectivity	All 10dB s/n (12dB SINAD for f.m.) AUX 12kHz (6dB) WIDE 6kHz (6dB) 15kHz (60dB) INTER 2kHz (6dB) 6kHz (60dB) NARR 1kHz (6dB) 3kHz (60dB) FM 12kHz (6dB)
Dynamic Range	106dB (300Hz i.f. bandwidth)
Image Rejection	70dB or better
IF Rejection	70dB or better
PBS Range	±1kHz or more
Notch Depth	40dB or more
Antenna	50Ω Lo-Z
Impedance	600Ω Hi-Z
Attenuator	20dB
AGC	10dB or less for 3μV to 100mV signal
AF Output	1W into 4Ω with 10% or less distortion
Line Output	1mW into 600Ω at 10% distortion
RS-232C	4800 baud, 1 start bit, 8 data bits, 1 stop bit, no parity
Power Supply	100/120/220/240V a.c. ±10% 35VA or less; 12-16V d.c. 25 watts or less
Dimensions	330 (w) x 143 (h) x 324mm (d)
Weight	9kg approx.

Abbreviations

A	amps
a.c.	alternating current
a.g.c.	automatic gain control
a.m.	amplitude modulation
BWC	BandWidth Control
c.w.	continuous wave (Morse)
d.c.	direct current
dB	decibels
dBμ	decibels relative to 1μV
ECSS	Exalted Carrier Selectable Sideband
f.m.	frequency modulation
FAX	facsimile
Hz	hertz
i.f.	intermediate frequency
kg	kilograms
kHz	kilohertz
m.o.s.f.e.t.	metal oxide silicon field effect transistor
MHz	megahertz
mm	millimetres
mV	millivolts
mW	milliwatts
p.p.m.	parts per million
r.f.	radio frequency
RTTY	Radio TeleType
s	seconds
s.s.b.	single sideband
s/chan	seconds per channel
s/n/	signal to noise
s/scan	seconds per scan
s/step	seconds per step
SINAD	Signal to Noise And Distortion
u.h.f.	ultra high frequency
V	volts
v.h.f.	very high frequency
VA	volt-amps (a.c. watts)
W	watts
°C	degrees Celsius
μV	microvolts
Ω	ohms

Summary

The NRD-535 is a logical and worthy successor in this line of well respected receivers. The price is high, but not unreasonable for what is a top quality receiver.

I have no hesitation in recommending the NRD-535 to anyone with a serious interest in short wave listening.

In its basic form, the NRD-535 costs £1115.00.

My thanks to **Lowe Electronics Ltd, Chesterfield Road, Matlock, Derbyshire DE4 5LE. Tel: (0629) 580800** for the loan of the review model.

A Basic RTTY Receive-only Terminal Unit - Part 1

RTTY as a mode tends to be one that is frequently clouded with mystique and newcomers to this fascinating form of communication can be rapidly baffled or put off by the apparent cost of suitable equipment. Bernard J. Greatrix G4ICZ describes his simple-to-build AD-2 receive-only terminal unit aimed at the beginner.

Many years ago, the author was tempted to build an ST5 type terminal unit [1] using 'junk box' components and Veroboard. This was supplemented by a Creed 7B Telex machine that served for many years as a moderate, if noisy and bulky transceiver of RTTY, to say little of the many 'happy' yet frustrating hours cleaning and oiling the beast.

Having dispensed with this combination, and in later years drifting towards home computing, the idea of another RTTY station was reborn, with the thoughts that progress would have improved upon past performances. Scanning the adverts soon revealed that considerable sums of money could be spent on commercial terminal units and software. Needless to say the old ST5 was resurrected and a commercial RTTY program purchased as this seemed to be the most cost effective solution. I was on the air again at an outlay of slightly less than £15 (discounting the cost of the computer and radio transceiver, of course, which had other applications, anyway).

Being an eternal optimist,

an even simpler system was sought - after all it took the best part of ten minutes to load a program that had many features I didn't need and in some instances couldn't understand. The aims of the exercise were to:

a. Produce a design which was as simple as possible, whilst maintaining a reasonably efficient operation and that didn't use 88mH inductors.

b. Keep costs to an absolute minimum - expanded as the project progressed to include both software and hardware costs.

I also wanted to power the terminal unit from the computer supply (+5V) and so eliminate some of the connections which had to be made.

This final aim, alas, was not achieved to my satisfaction and will be discussed later, but with the experimentation which ensued the AD-2 terminal unit came into being.

Amalgam of Ideas

The design is an amalgam of ideas which have appeared in a variety of magazines over

the last few years, and based around an active band-pass filter [3]. The performance is certainly not "state of the art" but as the entire project costs only a few pounds to build, even using brand new components, it should enable the newcomer to RTTY or those who may be tempted, but put off by the cost of high performance/high price commercial equipment to at least try the mode and having reached the limits of simple devices move on to the more elaborate.

The original prototype was built using single 741 devices with subsequent versions tried out using quad op-amps using both dual and single polarity supply rails, i.e. CA084 or LM348 and LM324 devices respectively. The dual polarity version is shown in **Fig. 1.3.** and options are discussed later. Little or no difference was observed in the performance of either of the first two devices suggested above, although using the LM348 at only +5V demanded significant changes to the component values. It was also noted that the circuit Q was much lower than calculation,

which tended to limit the use to strong signals with very little noise.

It should be emphasised that this is a basic receive only terminal unit. The author has used one with an LM324 totally powered with 5V d.c. from a Commodore 64, but its performance is lower than a similar unit with dual polarity rails.

At the end of the article is a very simple RS232-based terminal program for use on the Commodore 64 which shows just how simple receiving programs can be if you are prepared to dispense with 'memories', 'type ahead' and the like. I have only used the program on the above machine but it is believed that the same program could be used with other Commodore machines such as the Plus 4 as the 'basic dialect' and memory locations are very similar. Other popular home micros such as the Spectrum and BBC are understood to have user ports and equivalent communication capabilities. The appropriate user manuals and reference texts would need to be consulted before any connections are made to these machines.


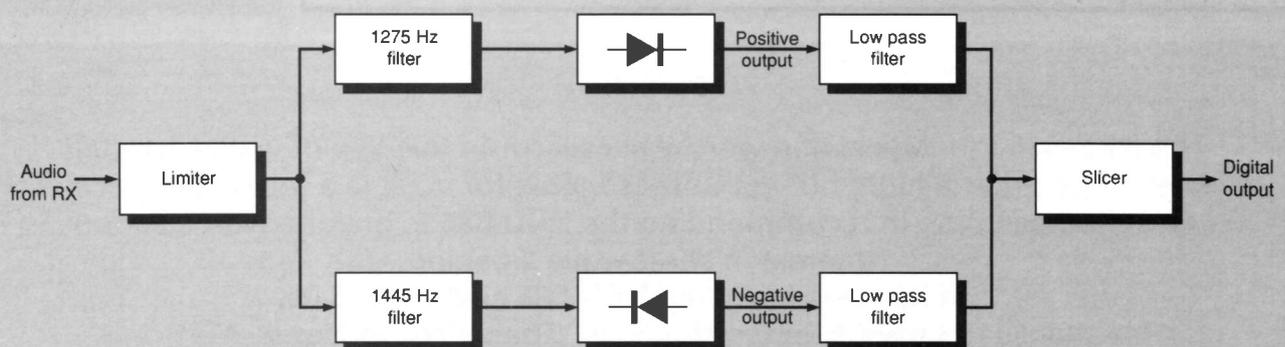


Fig. 1.1: Block diagram of a basic receive-only terminal unit.

Project

Fig. 1.2: Active band-pass filter calculations.

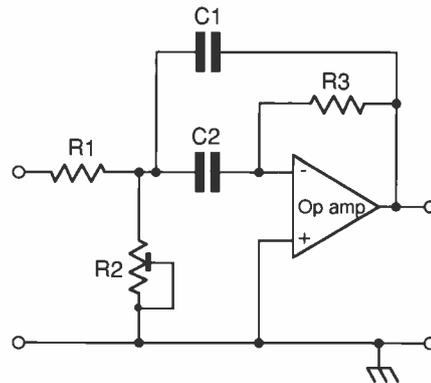

1. Select a value for C.
2. Select a value for Q where $Q = F_0/\text{Bandwidth}$.
3. Select a value for A_v where $A_v = \text{gain}$.
4. Select a value for F_0 where $F_0 = \text{centre frequency}$.
5. $R1 = Q/(A_v * \pi * F_0 * C)$
6. $R2 = Q/((2 * Q^2 - A_v) * 2 * \pi * F_0 * C)$
7. $R3 = 2 * Q/(2 * \pi * F_0 * C)$

How It All Works

The block diagram of a RTTY receiver converter is shown in Fig. 1.1. This shows how the two tones (1275 and 1445Hz - in amateur circles at least) of a RTTY signal are separated, individually processed and re-combined to provide a serial digital signal suitable for consumption by either a mechanical 'Telex' machine or a computer-based system.

Audio from the receiver headphone socket or, preferably, a 600Ω line, is first passed through a passive low-pass filter formed by R1, R2, C1 and C2 giving a 3dB cut-off at approximately 2.5kHz. Signal overload is prevented by diodes D1 and D2. Integrated circuit IC1a operates as a high gain amplifier, so the output is a constant amplitude square wave for audio input signals greater than 250mV. At this point the signal is split and fed to two active band-pass filters

IC2 and IC3, providing frequency discrimination. The filters are set independently by R8 and R9 to the required frequencies (1275 and 1445Hz). At this stage I should explain that the surrounding component values were calculated using the formulae given in Fig. 1.2 [3] and to ease this effort LISTING 1 gives a computer program enabling the user to try as many changes as is though necessary with the components to hand.

My own values were: C = 15nF - the junk box had about two dozen of these; Q = 26; Bandwidth = 55Hz (i.e. approx 25Hz either side of the necessary tone, plus a bit for drift); Av = 0.9 - Less than 1 to prevent 'ringing'; Fo = 1275/1445. The program also allows for 1700Hz and 2125Hz, thus permitting 425Hz and 850Hz shifts occasionally found on h.f. transmissions.

Following selection of the two wanted tones by IC2 and

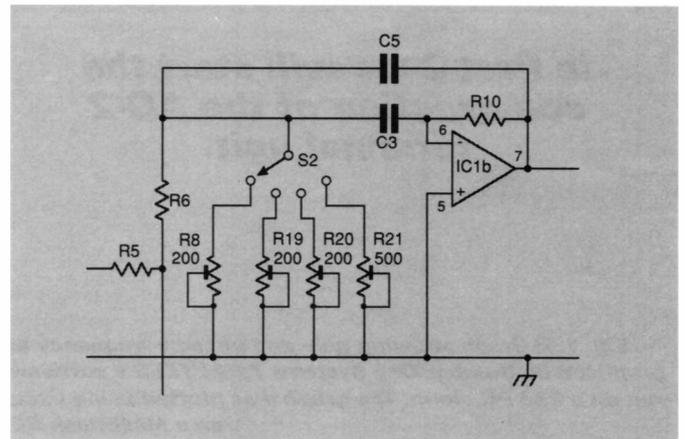


Fig. 1.4: Modifications to the circuit of the AD-2 terminal unit to add extra shifts and variable shift.

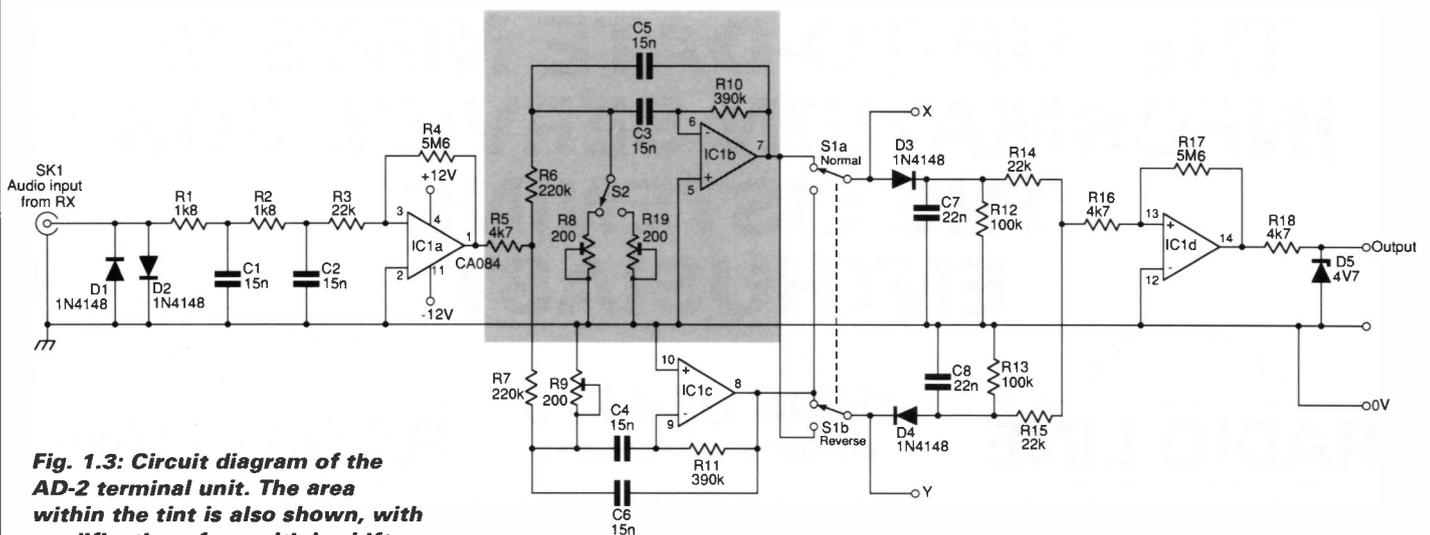


Fig. 1.3: Circuit diagram of the AD-2 terminal unit. The area within the tint is also shown, with modifications for multiple shifts, in Fig. 1.3.

Project

IC3, the tones are rectified and filtered by D3, D4, R12-R15, C7 and C8 to provide alternative positive or negative d.c. levels, which are then combined and amplified by IC4 to provide the required serial digital output. Diode D5 is added to provide 'belt and braces' protection of the computer. All that remains now is to buffer this signal to suit the computer.

Tuning

Tuning to a RTTY signal can be done very simply by ear - the aim being to hear both tones equally, but is best done with some form of

visual display. My own preference is to connect the active filter outputs to the X and Y plates of an oscilloscope (a rather old Heathkit OS2) providing a rather rounded cross when correctly tuned to the incoming signal. Incidentally the sharpness of the horizontal and vertical ellipses forming the cross is also a rough measure of the filter Q. A small d.c. amplifier/buffer with l.e.d.s will also give an indication of the state of tuning but I find them rather difficult to assess due to the constant flickering.

Acknowledgements and References

- [1] ST-5 Radcom March 1977 page 202.
- [2] RTTY the Easy Way BARTG
- [3] ARRL Handbook 1987 page 7.10
- [4] Commodore 64 Programmers Reference Guide.

In Part 2 we will start the construction of the AD-2 terminal unit.

Fig. 1.5: Graph showing gain and phase v frequency as produced by Number One Systems ANALYSER II software run on a 286 PC clone. The graph was plotted using Excel on a Macintosh SE.

Abbreviations

d.c.	direct current
dB	decibels
Hz	hertz
kHz	kilohertz
mH	millihenries
mV	millivolts
Q	'goodness' of a tuned circuit
RTTY	RadioTeleTYpe
V	volts
Ω	ohms

```

10 REM ::: Listing No 1.
20 :
30 :
40 REM ACTIVE FILTER CALCULATOR
50 REM TO CALCULATE RESISTOR VALUES
60 REM FROM REQUIRED PARAMETERS
70 REM ::: G4ICZ JANUARY 1991
80 :
90 :
100 FOR X=1 TO 4: READ F(X): NEXT
110 DATA 1275, 1445, 1700, 2125
120 :
130 INPUT "ENTER BANDWIDTH HZ"; BW
140 INPUT "ENTER GAIN (EG 0.6)"; AV
150 INPUT "ENTER CAPACITANCE (EG 22E-9)"; CA
160 PRINT: PRINT
170 PRINT "HZ R1 R2 R3 Q"
180 FOR X=1 TO 4
190 Q=F(X)/BW: W0=2*PI*F(X)
200 R1=INT(Q/(AV*W0*CA)/1E3+.5)
210 R2=INT(Q/((2*Q^2-AV)*W0*CA)+.5)
220 R3=INT((2*Q)/(W0*CA)/1E3+.5)
230 PRINT F(X); R1"K "; R2;" "; R3"K"; " ";
INT(Q+.5)
240 NEXT X
Note PI is available as a 'shifted' character (just to
the left of the RESTORE key) on the CBM64.

```

THE UP-TO-DATE NEWS & INFORMATION SERVICE FOR THE LISTENING ENTHUSIAST

RADIO LINE

0898 654676

UPDATED EVERY SATURDAY

RADIO LINE

*Calls charged at 34p per minute cheap rate,
45p per minute at all other times.*

SWM SUBSCRIBERS' CLUB

If you have a subscription then you will know all about the *Short Wave Magazine* Subscribers' Club. If you do not have a subscription then doubtless you will be wondering just what this page is all about. Membership of the *SWM* Subscriber's Club is free and automatic for all Subscribers and is our way of saying thank you to all those who have enough faith in their favourite magazine to pay for it 'up front'. Each month there will be Special Offers and occasional competitions with some really useful prizes to be won.

1991 Sixth Edition

DIAL-SEARCH

The Listener's Check-list
and Guide to European Radio Broadcasting

SECOND IMPRESSION
Up-dated April 1991

Including

- a full list of British stations
- a select list of European stations
- broadcasts in English
- classical music & jazz programmes
- "Making the Most of your Portable"
- two special maps
- topical comment

GEORGE WILCOX

This month *SWM* Subscribers' Club members have the opportunity to buy a copy of the Sixth Edition of *Dial Search* at a very advantageous price.

The up-dated Sixth Edition of *Dial Search* is the listener's check-list and guide to European radio broadcasting. Covering medium wave, long wave, v.h.f. and short wave broadcasting it contains a full listing of British stations and a select list of European stations, together with two specially designed fold-out maps. These maps, of Europe and the British Isles, have been designed to be used opened out with the rest of the book.

Other features include broadcasts in English, classical music and jazz programmes, making the most of your portable and topical comment.

This easy-to-use book is an indispensable part of any s.w.l.'s reference library.

The normal *SWM* Books Service price for *Dial Search* is £4.95 including postage and packing. However, *SWM* Subscribers' Club members can purchase *Dial Search* for just £3.50 including postage and packing.

The closing date for this offer is 30 November 1991.

SUBSCRIPTIONS TO SHORT WAVE MAGAZINE

Be sure of your copy every month and qualify for the Subscribers' Club as well. Special offers and discounts normally available to all members, including those abroad.

Please indicate the type of subscription required:

SHORT WAVE MAGAZINE 1 YEAR

- £21.00 (UK)
 £23.00 (Europe)
 £25.00 (Rest of World)

PRACTICAL WIRELESS 1YEAR

- £19.00(UK)
 £21.00 (Europe)
 £22.00(Rest of World)

SPECIAL JOINT SUBSCRIPTION 1 YEAR ONLY

- £34.00 (UK)
 £37.00 (Europe)
 £39.00 (Rest of World)

Prices current at October 1991

Subscription to commence with issue dated.....

Please send me my copy of the Sixth Edition of *Dial Search* @ £3.50 inc P&P.

To: PW Publishing Ltd., FREEPOST, Subscriptions Dept., Enefco House, The Quay, Poole, Dorset BH15 1PP

Name.....

Address.....

.....

I enclose cheque/PO (Payable to PW Publishing Ltd) £.....

Charge to my Access/Visa Card the amount of £.....

Card No.

Valid from to

**Credit Card Orders
can be taken on
(0202) 665524.**

Signature.....

If you do not want to deface your *SWM* a photocopy of this coupon will be accepted.

propagation

by Ron Ham

Faraday, Greyfriars, Storrington, West Sussex RH20 4HE.

It soon became obvious reading the reports I received, from astronomers and radio enthusiasts, that the sun was very active in August. **Clive Brook** (Plymouth), using a tripod-mounted refractor telescope with a projection box and screen, counted 12 sunspots and 2 groups on the 3rd; 10s/2gps on the 4th; 7s/4gps on the 8th; 3s/2gps on the 10th; 6s/4gps on the 12th; 21s/4gps on the 16th; 26s/5gps on the 18th; 34s/4gps on the 21st; 33s/5gps on the 22nd; 14s/4gps on the 26th; 12s/4gps on the 27th; 12s/4gps on the 28th; 22s/4gps on the 29th; 22s/6gps on the 30th and 24s/6gps on the 31st.

At his observatory in Bristol, **Ted Waring** counted 56 sunspots on the 18th and 22 on the 26th. In Sevenoaks, **Cmdr Henry Hatfield**, using his spectroheliograph, located 2gps, 14 filaments, 6 quiescent prominences and 'a medium to large anvil shaped prom.' on the east limb at 1412 on the 12th; a similar report but the 'anvil prom' had gone on the 13th; a chain of 23s/10fs/5gps/2 small very bright plages and a thin filament at 1117 on the 16th; similar conditions plus a small flare at the east end of the long chain at 1410 on the 18th, 55s/24fs/9 small qps at 1425 on the 19th; 55s/17fs/13qps at 1045 on the 21st; 2gps/17fs/13 qps/a small loop prominence on the east limb at 1115 on the 26th; 3gps/24fs/13qps/2 small hot spots at 1130 on the 29th; 4gps/19fs/9qps at 1425 on the 30th and the same except for 8 less filaments at 0945 on the 31st.

Despite a very hazy sun, when small groups and spots could have been

missed, **Patrick Moore** (Selsey) made a drawing, **Fig. 1**, of the groups and spots he was able to project at 1140 on the 5th and again at 1030 on the 10th, **Fig. 2**.

Solar Noise & Effects

Henry Hatfield's radio telescope recorded, on a paper chart, individual bursts of solar noise, at 136MHz, on days 16, 20 and 26 and at 1297MHz on the 20th. **Ern Warwick** (Plymouth) periodically heard the 'hissing' or 'whoOoshing' of solar noise, around 28MHz, on days 2, 4, 13 and 21. **Fred Pallant** (Storrington) reported a, 'high level of solar noise all day', on the 19th.

With this sort of activity, it was no surprise to learn that Ern Warwick found the 28MHz band 'dead', at times, on days 3, 4, 5, 6, 9, 11, 17, 19 and 23. Fred's comment for the 27th and 28th was, "Two very 'quiet' days - like someone has stolen the ionosphere". The extent of the 'blackout' on the 6th is clearly seen in **Fig. 3**.

Gordon Foote (Abingdon) and Ern Warwick, between them, heard one of the German propagation beacons, DK0WCY on 10.144MHz, giving auroral warnings at various times on days 2, 3, 4, 11, 12, 14 and 15.

Sporadic-E

Reference to the Band I (48-68MHz) section of 'dxtv roundup', elsewhere in this issue, will show that varying spells of Sporadic-E were observed almost daily throughout August. Long periods




Fig. 1.




Fig. 2.

were observed by **Bob Brooks** (Great Sutton) on the 4th, 7th and 13th.

I counted at least 24 East European f.m. broadcast stations between 66 and 73MHz at 1955 on the 24th. **Andrew Jackson** (Birkenhead) heard stations, most likely from Germany, Italy and Yugoslavia, between 99 and 103MHz on the 15th.

Propagation Beacons

First, my thanks to **Chris van den Berg** (The Hague), **Gordon Foote**, **Ted Owen** (Maldon), **Fred Pallant**, **Ted Waring** and **Ern Warwick** for their 28MHz beacon logs from which I prepared the regular chart, **Fig. 3**, covering the period July 26 to August 25. Signals from a new beacon in Australia, VK8VF, were heard by Ted Owen, Fred Pallant and Ern Warwick on those days indicated. During the month, Ern also received signals on an occasional basis from IK6BAK (24.915MHz), PY2AMI (24.931 & 18.100MHz), PT7BCN (21.150MHz) and almost daily from ZS6DN and 4X6TU (14.100MHz) and DK0WCY (10.144MHz).

Tropospheric

The daily variations in atmospheric

pressure, from July 26 to August 25, will also be found in my television column.

I received several strong broadcast stations from France while parked near Goodwood on the 19th and heard a variety of continentals spread through Band II while the pressure was high (1021mb) at 1930 on the 24th. **Andrew Jackson** received Band II transmissions from several stations in Ireland on days 15, 18, 19, 20, 24, 29 and 30, 'JAZZ FM' from London on the 18th, Belgium (Studio Brussel) and various transmitters in Holland (NOS 1, 2 & 3) on the 20th, France (RF Picardie) on the 29th and Germany (Deutschlandfunk & Hessischer Rundfunk), plus Radio's Broadland and Norfolk on the 30th.

Although at a camp-site 1.5km south of Banchory, surrounded by trees and 300m high mountains on all sides except the north, "where there's just a forest to cut out the DX", the opening on the 30th and 31st was good enough to enable **David Glenday** (Arbroath), to hear the Norwegian NRK Radio in Band II on both days.

While **George Garden** (Edinburgh) was TVDXing on Cairn 'O Mounth on September 2, he tuned through Band II and found a strong stereo signal from a foreign station, transmitting 'pop' music around 102MHz and, near 104MHz, there were two very strong signals from the new Scottish BBC Radio 4 transmitters, possibly Ashkirk Darvel or Rosemarkie. George also heard this signal while driving between Edinburgh and Laurencekirk at 0830 on August 31.

On the right of **Fig. 4**, is two BBC engineers, at Parham House, near Storrington, carrying v.h.f. back-pack transmitters being briefed just before the start of the 'live' programme *A House in a Garden* transmitted on Radio 2 during the afternoon of June 27. Each of these 'mobiles' worked with the programme presenters, Gloria Hunniford inside the house and Alan Titchmarsh in the garden.



Fig. 4.

Beacon	July					August																									
	26	7	8	9	30	1	2	3	4	5	6	7	8	9	10	1	2	3	4	5	6	7	8	9	20	1	2	3	4	5	
DFOAAB	x	x	x				x	x	x	x		x			x	x	x	x			x	x		x	x			x	x		
DFOTHD					x						x	x																			
DL0IGI	x	x	x	x	x		x	x	x	x		x	x	x	x		x	x	x	x	x	x	x	x	x	x	x	x	x		
EA3JA	x	x	x	x	x		x	x	x	x		x	x	x	x		x	x	x	x											
EA6RCM	x	x	x	x	x		x	x	x						x	x	x	x	x	x	x	x	x	x	x	x	x	x	x		
IY4M	x	x	x	x	x		x	x	x	x		x	x	x	x		x	x	x	x	x	x	x	x	x	x	x	x	x		
HG5GEW	x	x			x		x	x	x	x		x	x	x	x		x	x	x	x											
KD4EC																															
KF4MS																															
LA5TEN	x	x	x	x	x		x	x	x	x		x			x	x	x				x	x		x	x			x	x		
OK0EG	x	x	x	x	x		x	x	x	x		x	x	x	x																
OH2TEN	x	x	x	x	x		x	x	x	x		x	x	x	x																
PI7BQC																															
PI7ETE																															
PT7BCN	x	x	x												x																
PY2AMI	x	x	x	x	x		x	x	x	x		x	x	x	x																
SK5TEN	x	x	x	x	x		x	x	x	x		x	x	x	x																
VK2RSY					x		x	x							x																
VK4RTL																															
VK5WI					x		x	x						x																	
VK6RWA					x		x																								
VK8VF																															
WA4DJS																															
W3VD																															
ZD8HF	x	x	x	x	x		x	x	x	x		x	x	x	x																
ZL2MHF					x																										
ZS11.A	x	x	x	x	x		x	x																							
ZS5VHF																															
ZS6PW	x	x	x	x	x		x	x	x	x		x	x	x	x																
Z21ANB	x	x	x	x	x		x	x	x	x		x	x	x	x																
5B4CY	x	x	x				x	x																							

Fig. 3.

ssb utility listening

Peter Rouse GU1DKD
Barcroft, Rohais de Bas, St Andrews, Guernsey, C.I.

It is with great regret that the government of SSB Utilities has voted to severely restrict its immigration quota of stations that do not speak in plain English. This situation has been forced on us by a flood of immigrants from Numberstationland who have been wandering in the desert for many years in search of their gurus, Havana Hanna, Berlin Betty, Moscow Mike, etc., and now think they've found a substitute in this column. The resident utilities population has started to complain and in future many applications for visas are likely to be stamped 'barking mad' and rejected by the chief immigration officer (me), unless they have startling new information.

Sanity Regained

Ron King has never mentioned a numbers station to me. This kind and well adjusted man used to work for the operations departments of Transamerica and Air Europe and he wrote the *Complete v.h.f. and u.h.f. Airband Guide*. Ron has provided some very useful information on how the military use the North Atlantic tracks.

They use seven routes across the Atlantic, which are all referred to by colour; Blue, Red, Brown, Yellow, Black, Orange and Purple. Black is further split into two extra options of Black south and Black north.

The only ones that make landfall in the UK are:

Blue: Sept Iles (Tacan) - Goose Bay (Tacan) - Scrod (5437.0N 0555Z.0W) - 55N 050W - 55N 040W - 55N 030W - 56N 020W - 56N 010W - Macrihanish (Tacan).

Red: Yarmouth (VOR) - Halifax (VOR) - Sydney (VOR) - Ramea (NDB) - Vysta (4830.8N 05244.7W) - 49N 050W - 50N 040W - 50N 030W - 50N 20W - 50N 10W - Land's End (VOR).

Black: Eric (NDB) - Hadok (5426.5N 5955.3W) - Loach (5531.0N 5701.0W) - 56N 050W - 58N 040W - 60N 030W - 60N 020W - 60N 010W - Leuchars - Coltishall.

Black (south): as for Black to Loach then 58N 050W - 59N 030W - 59N 020W - 59N 010W - Leuchars, etc.

Black (north): as for Black to Loach then 58N 060W - 61N 040W - 61N 030W - 61N 020W - 61N 010W - Leuchars, etc.

I am indebted to Ron for a long and detailed letter on the subject of the tracks. My only regret is that I do not have space to include all the other information he supplied as well (another time maybe).

You Write

Before I start with any logs, can I remind you that I cover s.s.b. utility stations (usually h.f.). I say that because quite a number of you have sent in a variety of listings for such things as military u.h.f. operations, which do not fall within the scope of this column. I have no objection to this because I am an avid collector of frequencies, but unless it is s.s.b., it is unlikely to get a mention (it may be this column has no readers left by now but I will press on).

Paul H of Newbury has again sent in some goodies and revealed that the reason he is able to spend so much time monitoring is that he works shifts. On August 7, he monitored the evacuation of oil rig workers from the *Fulmar Alpha* rig on both 5.680 and 5.695MHz. The next day, he monitored Ascot 2100 with ex-hostage John McCarthy returning to RAF Lyneham using the callsign 'Crystal' on a 'phone patch via 'Architect' on 9.032MHz.

Paul has finally managed to hear US customs on 11.494MHz trying to intercept a possible drug running aircraft near Jamaica. It involved ground stations 'Slingshot', 'Home Plate' and 'Almighty' with aircraft 'Kodiak 04' and 'Tijuana 41'. They did not quite manage to catch the aircraft before it landed.

During September, he spun the dial of his FRG-7700 onto a USAF frequency and heard *Air Force Two* (SAM29000) with the vice-president winging his

way towards Nigeria. Paul has also come up with some more callsigns:

Gambler, Nickel, Switchblade and Tiger are Upper Heyford.

Evergreen and Ramrod are Lakenheath.

Banter Control is Mildenhall controlling tankers.

Three Geese is Fairford again controlling tankers.

Raymond Zero One is Langley Air Force Base in Virginia USA.

War 46 is the National Command Authority at Fort Ritchie in Maryland in the USA

Paul mentions that the Presidential back-up aircraft (SAM26000) appears to follow the presidential aircraft (*Air Force One*) just about everywhere and has been heard on 6.680MHz recently. Paul also logged Alconbury on 4.477MHz with an E3 AWACs 'Big Daddy'. He's also got the numbers bug now and heard a female reading numbers followed by the Lincolnshire Poacher on 9.251MHz.

Peter Finn also believes that some of the transmissions on the frequency may be from the UK as the signal is often very strong in South Wales.

Peter also wonders if some of the reports sent in by foreign correspondents use s.s.b. radio links, as they have that typical sideband sound to them. I am not aware of any dedicated press links, but there may be one of two possible explanations. First, the quality of telephone links from some countries is very poor and the heavy filtering that sound engineers need to use can lead to a slightly hollow sound. Secondly, it is quite conceivable that radio links are occasionally used, but probably through existing services such as those offered by Portishead and Stockholm Radio.

Mystery

Now the mystery of the month, which has been sent in by Chris Broughton. He sent in a tape of a station monitored on

9.495MHz on September 12, which sounds like a radar controller passing information on targets that are clearly aircraft. Only one station can be heard and that uses the callsign 'Baker'. The other station, which is below the noise, is 'Delta 9 Quebec'. All targets are referred to by tracks that are tagged with letter/number identifiers such as 'Golf Echo 432' and on the tape, all the targets are identified as 'friendlyes'. All map coordinates use a letter/number group such as NLJD54 and there is reference to the 'interesting area'. This type of radio traffic is not unusual on the military bands, but now the mystery: The frequency is slap in the middle of a broadcast band and the controllers accent is not British or American even though he speaks in English. At times, the accent seems to be Irish but then at others it sounds South African, although I suspect it is neither.

I have monitored the frequency several times but not heard the station. Keep a listen out for this one and if you can identify it let me know and I will pass the word on.

Tom Davies has sent logs from South Africa and he has a good path into Pacific and Far East areas. His log includes Auckland Volmet on 6.679MHz, Singapore and Bangkok on 8.942, San Fransisco on 11.282 and Honolulu on 13.089MHz. Tom uses a Kenwood R-1000, Sony ICF 2001D and feeds them via an a.t.u. from an indoor helical antenna mounted in his loft.

And Finally

Before I sign-off, an apology if your log has not been mentioned. Unfortunately, a major mix-up happened during the previously mentioned alterations to Chateau Rouse. Early in September, some of the letters received over a period of about three weeks were inadvertently destroyed. If you sent in snippets and were not mentioned, you now know why.

**Be sure of getting your copy of SWM each month.
Place this regular order form with your
newsagent... today**

Dear Newsagent,
please reserve / deliver my monthly
copy of SHORT WAVE MAGAZINE

Distributed by Seymour

NAME
ADDRESS
.....
Signed

**If you can't see SWM on the
bookshelf at your local outlet,
please call the Editorial Office in
Poole and we will talk to our
distributors to find out why!**

NORTH AMERICA

Gerry Dexter, RR4, Box 110, Lake Geneva WI, 53147 USA.

Once again it's time for our quarterly look at what's happening on short wave in the Americas and, as usual, there seems to be a lot of news.

Some of the most interesting listening targets of late aren't the rare, hard to hear DX stations but simply unusual programmes paid for by specific interests and aired on some of the independent US short wave stations. One of the most recent additions is Croatian Radio Zagreb, a daily one hour programme produced by the station based in the Croatian capital and aired over LeSea Broadcasting's WHRI, Indiana at 0000 nightly on 7.315MHz. The programme is intended for Croatian expatriates and those who left Croatia in recent years in order to escape communism. Of the hour long broadcast, 15 to 30 minutes is in English. Croatian Radio Zagreb, a name only adopted in 1990, claims it is the oldest station in Southern Europe.

Radio Miami International, a station planned to beam to the Caribbean, hasn't gotten the go-ahead from the FCC yet. While it awaits positive results it is buying time on WRNO, New Orleans. Its Spanish language broadcast begins at 0200 on 7.355MHz. So far, the planned Radio Copan International, Honduras, also planned by Radio Miami International hasn't shown, though it is still expected and may be active by the time you read this.

Radio Miami International is also acting as a middleman in arranging airtime for a number of anti-Castro Cuban organisations that are now broadcasting programmes intended for listeners in Cuba. Most of these are being aired over WWCR, Nashville, Tennessee, some of them on a nightly basis, some only on one day of the week.

Radio Free New York, a pirate-like programme that was aired weekly on WWCR has discontinued its broadcasts. By now, though, something quite interesting should have taken its place. The new programme will be of special interest to s.w.l.s and radio hobbyists!

Speaking of WWCR, it now has its second 100kW transmitter on the air and rumour has it that yet a third such unit is on order. There seems to be more and more evidence that there are a lot of groups willing to pay to get their own programmes out to the international short wave audience!


The possible rebirth of currently silent KCBI in Dallas that was mentioned last time has still not happened, even though a summer season frequency schedule was arranged.

VoA Notes

The Voice of America's Philippines relay station had problems due to ash from the Mt Pinatuba volcano eruption last June. The ash, plus wind and rain caused a loss of the satellite feed from

4647 Old Hydes Ferry Pike Nashville, TN 37218 USA

15,690 KHZ
7,520 KHZ

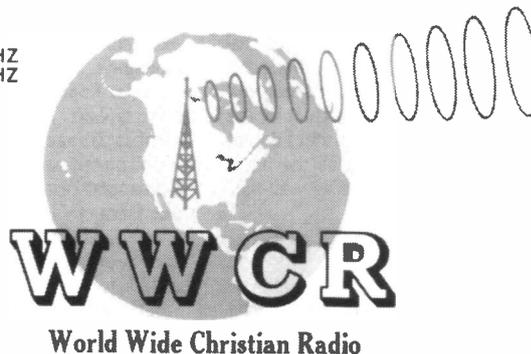

Ohio s.w.l., Ed Turner, loves old Hallicrafter sets. He has a shack full of them!

Washington. Telephone lines had to be used for several days until a new satellite dish could be put up at the Tinang transmitter site.

The Monrovia relay site in Liberia is said to be in very bad shape after the civil war there. It's hoped Monrovia will return but no one seems to have any idea when that will be. Before too much longer the VoA will have a short wave relay on the air from Botswana. Construction should have started by now on a new relay site in Sri Lanka that will eventually feature three 500kW transmitters. The proposed relay in Israel is, however, in trouble again. The Israeli High Court has forced a halt in construction until a study can be completed on the environmental impact the facility would have on the Negev Desert.

Still more VoA 500kWers are on line now. The big guns newly installed at the Bethany, Ohio site were testing in late summer/early fall. The amateur

radio operators who work at the Bethany installation have arranged to issue special QSLs direct for reception of the Bethany relay. That's most welcome! And wouldn't it be 'lovely' if all relay sites would do that!

Washington Talk

It looks virtually certain that - eventually - surrogate broadcasters Radio Free Europe and Radio Liberty will be merged or swallowed by the Voice of America. One study is already calling for Radio Free Europe to discontinue programmes for Poland, Hungary and Czechoslovakia, and that would likely be the beginning of the end.

But perhaps not for the idea of government-sponsored surrogate broadcasts completely. Besides Radio Marti, beaming to Cuba via VoA transmitters, one US Senator is calling for a study that might lead to an RFE/RL type broadcaster beaming at China.



Tennessee short wave station WWCR makes a living by airing a wide variety of paid programming, including shows from anti-Castro groups.

South American Notes

Radio Frontera, San Antonio, Venezuela, which had been inactive on short wave for several years has returned to its old 4.760MHz frequency. Well, nearly. Actually, it's 4.761MHz. It's being noted in to sign off at 0257.

Radio Nacional del Ecuador is another station that was long active on short wave. They were gone a long time and have been back for quite awhile, but it seems a lot of listener's aren't aware of the fact. Perhaps that's because Radio Nacional doesn't have their own station. Instead, they're heard via HCJB for half an hour per day, at 1730-1800 on 15.220MHz with a programme in Spanish called *Letter to Absent Ecuadorians*. You can QSL Radio Nacional by sending your report in case of the *DX Party Line* programme at HCJB.

The correct name of the Colombian station on 5.535 mentioned last time is Ecos Celestiales. It's a religious station, located in Medellin. Address: Apartado Aereo 8447.

Radio Nacional Colombia is reported to now have a bit of English in its schedule, namely on Saturdays at 2100 for a 15 minute programme called *Colombian Cultural Magazine*. Frequencies are 9.635, 11.825, 15.335 and 17.865MHz but these can vary a great deal!

No Go on Guam

Disagreements with the local government over who has title to what has prevented High Adventure Ministries from getting its KHBN on the air, even though the equipment has been on Guam for more than a year. It is very, very likely that High Adventure will give up on Guam and put KHBN on the air from somewhere else.

Other News

Let's note the return of still another station that's had some down time. Sani Radio, the religious/cultural station in Honduras that was active on 4.755MHz for a time has returned. It is still announcing its frequency as 4.755 but it's actually on 6.299MHz variable, running to 0000 sign off in Spanish and Miskito.

Radio Canada International's Sackville transmitter continues to be the source of more and more relays. The latest is something a bit unusual. The Cyprus medium wave station Radio Monte Carlo Middle East should, by now, be airing a 15 minute programme at 0400-0415 on 5.960 and 9.755MHz. RCI will get time on the Cyprus station.

That takes care of things for this time. Good listening!



D A T I N G
E L E C T R O N I C S L I M I T E D

Clayton Wood Close
West Park
Leeds LS16 6QE
Tel: 0532 744822
Fax: 0532 742872


For products you can rely upon to give amazing results

For information on **Active Antennas, RF Amplifiers, Converters, Audio Filters, the Morse Tutor and Speech Processors** send or telephone for a free catalogue and selective data sheets as required.

All our products are designed and made in Britain.
Orders can be despatched within 48 hours subject to availability.



 — VISA AND ACCESS WELCOME — 

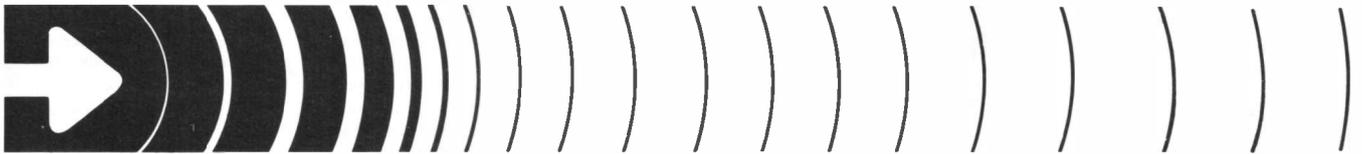

2 NEW BOOKS


World Press Services Frequencies
• New 5th Edition •

Receive RITV news services from around the world and obtain information that is uncensored and unedited.

In addition to listing hundreds of frequencies and transmission times this new edition contains all needed information on antennas, receivers, terminal units, monitors, and how to receive most of the world radioteletype news and press services. (84 pages A4).

Be better informed on world events and happenings, hours and even days in advance of radio, TV or newspapers.

Price only £8.95 plus £1.00 UK postage. Overseas post £1.50



Directory of Military Aviation Communications (VHF/UHF) Europe, North Africa, Middle East

War games ... in-flight refuellings ... interception of Soviet BEAR reconnaissance bombers off our coasts ... elite military demonstration teams performing at air shows ... secret coded broadcasts to strategic bombers on airborne alert. These are some of the reasons why monitoring military aircraft radio communications is one of the most challenging, exciting and interesting activities. Nowhere else can you find the action, variety and drama that are the routine, everyday traffic heard in military aviation radio.

This is the first comprehensive directory to list military aircraft radio communication frequencies for all of Western Europe, North Africa and the Middle East. Not only lists over 6000 frequencies 30-400MHz, but a guide to monitoring, locations, details of users and maps have been included. (154 pages A4).

This book is a must for anyone with a scanner!

Price only £17.75 plus £2.00 UK postage. Overseas post £2.50.

Ask for a copy of our FREE book catalogue!

AXDON BOOKS, SN91, 32 Athol Street,
Perth PH1 5NP

Tel: 0738 30707 Fax: 0738 43725




NEW Introducing Omnifax ... A Superb Weather Satellite and Facsimile Display Package for PC Compatibles

This is a brand new interface and software package for the decoding and high resolution display of weather satellite, and all facsimile images - all for only **£169.50 + VAT.**

Features:

- Decodes all APT weather satellite formats up to 800 x 600 pixels
- Decodes all facsimile signals (VLF, HF, VHF, UHF)
- Interface fits any PC Compatible machine
- Printer dump - laser or dot matrix
- Fully automatic reception
- Animation of image sequences
- Interface caters for optional SSTV and Codebreaker software
- Displays amateurfax, and pressfax (incl. colour!)

Omnifax is available now, for use with your existing receiving and computing hardware, or we can supply complete systems. For further information, and details of our systems for other computers our complete catalogue is available on request.

martelec communication systems

The Acorns, Wyck Lane, East Worldham, Alton Hants. GU34 3AW.
Tel/Fax (0420) 82752



COME ALONG AND SEE US AT THE LEICESTER SHOW ON STAND No. 10. WE HAVE A LARGE SELECTION OF SCANNERS AND RECEIVERS ON DISPLAY.

AR3000



Coverage from 0-1300MHz. All-mode Scanning Receiver.

YAESU FRG-9600



All-mode Scanning Receiver that provides features never offered before, coverage 60-950MHz continuously, with 100 keypad-programmable memory channels.

ICOM IC-R100



Bring the world to your car. Find stations quickly. Full coverage 500KHz - 1.8GHz. A total of 100 memory channels. Easy to operate design. Built-in 24 hour system clock.

IC-R7100



From wideband coverage to a window system, the IC-R7100 Takes you in to the information era. Stay top of the world with the latest in VHF & UHF technology.

ALWAYS A LARGE SELECTION OF SECOND HAND & COMMISSION ITEMS IN STOCK.

AUTHORISED DEALERS FOR
 * YAESU * ICOM * STANDARD * REVCO
 * G WHIP * DRAE * STAR MASTERKEY *
 * WELZ * DATONG * I.C.S. * FAIRMATE *
 * YUTPITERU * ALINCO * AOR * TONNA *
 * JAYBEAM * SANDPIPER * BNOS * AKD
 * CAPCO * REVEX *

INSTANT FINANCE AVAILABLE SUBJECT TO STATUS.
 Prices correct at time of going to press.

HANDHELD SCANNERS

HP-200



Most popular scanning handheld ever! If you don't believe us ask your friends, they probably have one.

£269

MVT-7000



The very latest in a family of quality pocket scanners, coming with a super wide-band continuous coverage from 100KHz - 1300MHz

£289

ICOM IC-R1



A base station in a handheld scanner! Too many features to list, must be seen!

£369

PLUS THE USUAL FAVOURITES

- | | |
|------------------------|-----------------------------|
| YAESU FT-1000 | Top of the range |
| FT-590 | General Rx, ATU, PSU |
| FT-767GX | HF & 2%70 option |
| FT-650 | 6m/10m, SSB, 13.8V |
| FT-757GXII | 12V General Coverage |
| FT-747GX | Ideal for mobile use |
| ICOM IC-781 | HF + built-in ATU & PSU |
| IC-765 | All band transceiver |
| IC-735 | HF Gen. Cov. -12V |
| IC-725 | Budget HF - 12V |
| IC-726 | HF/6m - 12V |
| DUAL BAND TRANSCEIVERS | |
| IC-5609 | with LCD Keypad |
| IC-2410 | Dual receive/Display |
| IC3220 | Inc. Airband |
| DR-590 | Dual receive |
| C-528 | Extremely popular |
| DJ-560 | Great value for money |
| IC-W2E | Another Icom winner |
| ICOM IC-R9000 | Unbelievable |
| IC-R7000 | Can't be beaten |
| IC-R100 | Budget scanner |
| IC-R72 | Budget HF Receiver |
| IC-R71 | Old favourite |
| YAESU FRG-9600 | 50-950 AM/FM/SSB |
| FRG-8800 | Value for money |
| ADR AR2800 | Good quality SSB Rx |
| AR2000 | No gaps!! (1000kHz-1300MHz) |
| YUPITERU VT-125 | Excellent review in SWM |

Amateur Radio Communications,
 38 Bridge Street,
 Earlestown,
 Newton-le-Willows,
 Merseyside
 WA12 9BA.

TEL: (0925) 229881
 FAX: (0925) 229882

OPEN TUES-SAT
 10-5PM

1 MILE FROM J23, M6 AND
 4 1/2 MILES OFF J9, M62



OUR AIM IS 100% SATISFACTION

SIGMA EURO-COMM

Importers of Communication Equipment
 Manufacturers of Antennas & Accessories
AMATEUR - SCANNERS - ANTENNAS - CB

★
N
E
W
★



AR1000 XLT HAND HELD

Frequency Coverage 500kHz-1300MHz No gaps.
 AM/NFM/WFM Supplied with the following accessories: ♦ Wide band whip aerial for VHF & UHF ♦ AC Charger ♦ 12V DC Lead & cigar lighter plug for mobile use ♦ 4x AA Nicad batteries ♦ Soft case & strap ♦ Earphone **£259.00 + p&p.**



AR 2800 Mobile/Base

500MHz-1300MHz AM/NFM/WFM & SSB **£259.00 + p&p**

AR2500 Mobile/Base

1MHz-1500MHz **£419.00 + p&p**



MOBILE SCAN ANTENNA

Twin coil 25 to 1300MHz available with PL or 3/8 fitting.

FREE with all Scanners solid via Mail Order - DISCONE ANTENNA



SIGMA SE1300

20-1300 MHz Receive
 Transmit 50, 144, 430, 900, 1200 MHz input
 power rating: 200 watts
 input impedance: 50 ohms.

£59.95 + p & p



SIGMA SE700

70-700 MHz Receive
 Transmit 70-500 MHz
 Max Power on transmit
 500 watts impedance
 50 ohms.

£24.99 + p & p

Mail Order: Cheques and P.O. made payable to Sigma Euro-Comm.

TRADE ENQUIRIES WELCOME

After 6pm and Weekends 021 705 3441 and 0922 414836

Sigma Euro-Comm, Unit 14, 272 Montgomery St., Birmingham Enterprise Units, Sparkbrook, Birmingham B11 1DS. Tele/Fax: 021 766 8146

THE FLYING SHOP

BIGGIN HILL AIRPORT

YUPITERU VT-125

- Excellent Reception ● 108-142MHz ● 30 Memory Channels
- Illuminated LCD Display | 50 or 100kHz Steps
- Search, Scan or direct frequency entry ● Keylock ● Keyboard beep tone ● LCD Signal Meter

ONLY £110.00 inc VAT

Complete with 3 AA size NiCad Batteries, 240V Mains adaptor, 12 v.d.c. cigar plug & carry strap

ALSO AVAILABLE, YUPITERU VT-125 MkII

Specification as VT-125 but with addition of 25kHz steps. **£165.00 inc VAT**

MAC/WIN 108

- Compact ● 108-142.975MHz ● LCD Display ● Search, Scan or direct frequency entry ● Key lock ● Priority Channel
- ONLY £116.00 inc VAT**

YUPITERUMVT-7000 1MHz-1300MHz

- AM-NBFM-WBFM ● Multiple steps ● Better than 0.5µV ● 200 Memories ● Rotary Dial ● S-Meter ● Fast Scan Speed ● Lockout/Priority ● NiCads ● Charger/AC PSU ● 12V Lead

The MVT-7000 is the latest from Yupiteru and provides unbroken coverage throughout the spectrum. Each one is carefully tested by us and supplied with a unique power supply that will not only recharge the ni-cads, but also run the set directly from the mains. Its beautifully styled lines and superb engineering make it the best buy for the customer who wants the widest frequency range possible.

£275.00

The Flying Shop, Biggin Hill Airport, Westerham, Kent TN16 3BN

Tel: (0959) 76370 0900 - 18.00 (Mon-Sun)

(0959) 72352 0700-0900 & 1800-2000

Fax: (0959) 76711 24 Hour.



satellite tv news

Roger Bunney, 33 Cherville Street,
Romsey, Hants SO51 8FB.

As Sky viewers may be aware, more difficulties have been experienced on Astra 1A and again it's problems in attitude control. During the afternoon and into the evening of September 1, the electronics controlling Momentum Wheel no.1 'showed an anomalous behavior. As a consequence, the spacecraft lost its correct pointing, which resulted in loss of traffic in all transponders' i.e. the satellite swung away from earth and all signals - both up and downlinks - were lost. Signal loss was from 1543-1955UTC. SES at Chateau Betzdorf actioned a spare momentum wheel to take over control. The following day, Astra 1B seemingly still had a problem with attitude control though since then, no signal loss has been observed - readers may recall that a similar problem occurred on June 4.

Olympus, the rogue satellite, has now been recovered and is now on station back at its original slot of 19°W. On May 29, last incorrect signals from the Italian Fucino ground station instructed the satellite to swing away from its normal station keeping position, as a result the batteries ran down and rocket correction fuel froze. The bird then drifted eastwards at about 5° per day but, following a succession of correction signals from high powered ground stations, control was re-established. Batteries were recharged, fuel thawed and the wandering satellite was returned to its original slot. British Aerospace (Stevenage) was prime mover in the rescue bid, which utilised several ground stations sending many thousands of commands over a 3 month period.

With a more stable situation now in the USSR, there have been far fewer news feeds via the Gorizont satellites at 11 & 14°W. In fact, 11° has been very inactive during the latter part of September. Visnews still carry feeds over 14°W at selected times of the day - but attention has tended to focus on Yugoslavia. An insight into the country and the general situation can be seen in the daily programmes on Eutelsat I F4 - 7°E via the RTV Beograd programme 11.178GHz horizontal starting around 1700 through to 2200 approx. An additional 3 hour news programme is also being downlinked over (surprisingly) Eutelsat I F5 - 21.5°E at 11.471GHz from about 1830, again ex Belgrade. The 11.148GHz horizontal transponder over ECS II F1 13°E was seen carrying war footage ex Yugoslavia via an EBU circuit on September 18 during the evening for various European broadcasters.

The French 'TV Sport' downlink is being carried over Eutelsat II F2, 13°E at 12.7GHz (Telecom band). Eurosport appears on yet another satellite, this time the French Telecom 1A, 8°W 11.66GHz with English/French language subcarriers - downlink signal strength levels have dropped off

markedly in recent weeks judging by the sparklies noted this past week. Sports feeds (golf) have been carried over the North Atlantic path via Intelsat VI F4 on a leased Brightstar transponder 11.12GHz vertical early in September. CBS TV New York was carried over colour bars on Eutelsat II F2, 10°E at 10.98GHz horizontal on August 26, an unusual sighting and the feed suddenly dropped carrier with no indication of source or reason. Another new programme is the MBC - Middle East Broadcasting on Eutelsat II F1, 13°E 11.554GHz horizontal now carrying test programmes through to Christmas - programmes started September 18.

A BAE Starbird TES (transportable earth station) has been operating out of Moscow seen with identification over Eutelsat I F4, 7°E with a WTN Moscow caption (World Television News). Check out 11.18GHz horizontal! The CNBC News programme for Super Channel is usually carried over the Brightstar permanent lease 11.505GHz vertical, recorded in at Super Channel for subsequent screening. And 'ITN SNG1 UK17' has been carried over ECS II F2 10°E at 10.98GHz horizontal during the evening of the 14th with colour bars, eventually cutting carrier 2230 with no other video seen.

Satellite DX ?

Though most staunch TVDXers feel that satellite reception is not really TVDX in the true sense, there are occasions that suggest DX is seen. For example I have been logging the three Israeli programme feeds from Intelsat VA F12, 1°W - in theory the signal is tightly spotted into Tel Aviv and invisible in the UK - at least on a 1.5m dish.

However, the honour this month is credited to Ian Roberts in South Africa who is receiving watchable signals from the Astra 1A satellite orbital at 19.2°E, as is his friend Charles Vana, 100km south of Johannesburg! Ian has sent several pictures of his reception on his home-constructed glass-fibre 3m dish and 1.1dB noise LNB. The picture shows a bandwidth of 14MHz sufficient to pass the audio subcarriers, carrier to noise of about 6.5dB (2dB below threshold), larger dishes to 6m will provide noise free reception. Signals received are horizontal Astra 1A downlinks of Screensport, Lifestyle, Teleclub and RTL4. Other 'DX' successes are from Eutelsat I F4, 7°E with noisy mono pictures from the ET-1 (Greece) feed 11.55GHz horizontal. Ian estimates that the Astra signals are about 27dBW on the stronger signals (25dB down on the main boresight centre at 52dBW).


Orbital News

The Intelsat Organisation advise that


The Teleclub film channel over Astra 1A 11.332GHz horizontal, received in South Africa by Ian Roberts.



Middle East Broadcasting (MBC) is now operational, part of the station opening montage depicts two satellites transmitting MBC signals back to earth, the two satellites are Eutelsat 13°E and Arabsat 19/26°E.

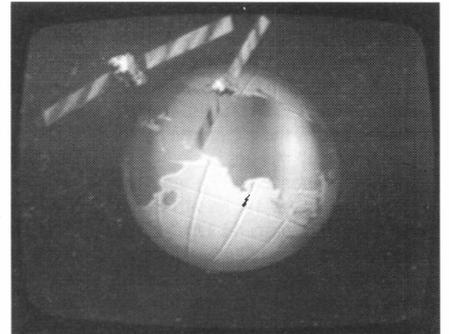

Colour bars and from Nittedal Earth Station, seen over Intelsat at 1°W.

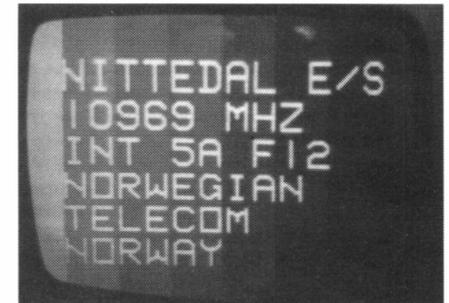

their 4th in the series of Intelsat VI craft was successfully launched in August and is now located at 38°W, where it is undergoing a series of tests. The Atlantic slot allows access between the States and Europe for testing of the 38 C Band and 10 Ku band transponders. Tests should be complete by the end of September and the satellite will then be moved to its permanent orbital slot. A life of some 15 years is anticipated. Note: though the tests are not scheduled, it is possible to receive test transmissions if you are fortunate enough to monitor that dish heading at the correct time, I once saw tests at midnight! Eutelsat meanwhile have announced a delay with the launch of their Eutelsat II F3 destined to slot at 16°E, hopefully end October.

There is divided opinion amongst European satellite broadcasters over the European Council's directive for the adoption of D2MAC as the on-going standard for transmission. BSKYB and Filmnet are both opposed to D2MAC whereas SCANSAT (the Scandinavian cable TV group) that currently transmit in D2MAC are in favour of the standard. Further representation is to be made to the EC by commercial broadcasters objecting to the enforcement of the MAC standard. Incidentally, Scansat are part of the organisation that has successfully applied for the Swedish first commercial national TV channel - M3 - that will operate from Malmo,

Southern Sweden. A recent decision in Berlin suggests that D2MAC will be avoided in the interests of adopting a PAL Plus standard.

British Aerospace now have an involvement with the Motorola low orbiting Iridium project, a system of 77 low orbit satellites that will provide communications over the globe during the late 1990s.

Concern has been expressed by SES Luxembourg over the use of the higher powered series II Eutelsat craft at 16 & 21°E. The fear is of co-channel interference to certain TV channels carried over the Astra satellites. The use of 600mm Astra dishes with their relatively wide forward pick-up lobe is such that insufficient rejection of the nearby Eutelsat satellites will result. Eutelsat have been unresponsive!

Postscript-reader Chris Levy from Romsey uses a standard Amstrad satellite receiver and 600mm dish and has been using the system to search for other orbital craft and has succeeded in good reception from Eutelsats at 13, 10 & 7°E, with fair reception from sound in sync news feeds at 21°E.

This shows that it is possible to use the simplest of equipment for multi-satellite reception. If any reader is considering this approach to combine both domestic and hobby satellite viewing then I would suggest if possible obtain the 800mm Amstrad dish.

amateur bands round-up

Paul Essery GW3KFE
PO Box 4, Newtown, Powys SY16 1ZZ.

Hello again!

The XY0RR group duly showed despite all the problems and, at the time of writing, have recently gone QRT after a successful operation.

The Hungarian ZA expedition got a licence, but then were 'prevented from operating by the Ministry of Defence'; now we are told that tomorrow, September 16, will see a first contact between ZA1 and the UN station, with bigwigs at each end. That I can accept; but I go further and hope then to find some true-blue ZA stations, trained and equipped by the group who got as far as setting all this up.

Mid-afternoon, July 17, there was a station signing ZA1A, on 14.145, listening up between 14.175-14.200, working Europeans. The beam heading was about right, but the behaviour of the mainland Europeans on the frequency, mainly DLs, and the foul language, were of a sort which would indicate to any sensible administrator that amateur radio ought to be banned world-wide! Frankly, I felt ashamed to be an amateur. Why can't the national authorities world-wide determine the licences of such oafs?

Simplify!

Ever thought of a home-brew receiver? **Ron Pearce** over there in Bungay, changed from his usual 0-V-1 tool to using the *SWM* Two Transistor Receiver designed by G3RJV, and using parts from Ron's junk box. On 14MHz s.s.b. he found JA9AA, 4X1MO, 9K2YA, CX3AAE, YV5KHE, LY2ZO, ES1QD/2, KB2KK, W7NES and SM7DHz; Ron notes that next time he'll report on 7MHz with the same receiver.

Brian Lucas continues in his training school near London. He has now obtained G7JTW and is having fun on 144MHz, but a degree of no-success on 50MHz. Basically, Brian is discovering that 50MHz is a band where you put a call out on a dead band with no success, in the end get a contact and then find yourself at the sharp end of a pile-up - especially if you have a GM or GW or whatever prefix for rarity value. Another lesson Brian learned the hard way occurred when he took a 'handy' to the village green to search for distant repeaters; standing in the middle of the cricket pitch he put a call out and the red light indicating flat battery came on. All I can add is that I regard that as fair punishment for walking on the cricket pitch! Seriously, if you go out with hand-held gear, charge the batteries fully first, and if you can take a spare charged battery pack.

Next, a letter from **Peter BRS 36554** of Newcastle-on-Tyne. Peter is now up to 283 countries confirmed on the bands, with ET2A, ST0DX, KB5LRO/KH9 on 28MHz and ZK1BY cards in the latest batch. On 28MHz Peter mentions logging AP2JZB, HH2BN, HI8OMA,

OD5QZ, PJ2HB, S01A, VP8CFM, V51EG, V85GA, YF0CHA, WP4CLZ, ZP6FGS, 3B8FA and 5H3GM. Turning to 14MHz he includes A41JR, A41KB, CE3NKA, CN8EC, CY9CWI, D68RH, FK8CP, FK8FI, HC2HVE, HI8FHD, HI8OMA, HK0EFU, HL1UA, HZ1AB, JX3EX, JY3ZH, KP2/V56CT, OA4AWW, OA4OS, OY2VO, ST0DX, TG9AFA, TJ1FN, TU2JL, VK9LA, VK9ND, VK9NS, VP2EBN, VU2JQ, XE1ZLW, YN9BS, ZK1TW, ZP5MSC, 1Z9A, 3C0CW, 3D2XV, 4S7VK, 6K91WJ, 7X2AC, 8Q7CO, 9M2CW, 9M8PV and 9Y4BU.

Enormous List

A quite enormous list comes from **Gerald Bramwell** (Swinton) covering all the bands 1.8-29.7MHz. On each band, Gerald splits his listing into: USA/Canada, USSR, Europe and DX for the rest. He also makes good use of coloured pens to separate the sideband from the f.m. on 28MHz. The end result of all this trouble is a list which I can 'pick the bones out of' at a glance, despite Gerald having handwriting nearly as spidery as my own! Starting at Top Band, I notice the usual Gs, E1, I4ZUW and a couple of European Russians. 3.5MHz offered a couple of VOs, EA8BDW, CT3FF, 7X2BK, 5B4ES, 9Q5TE, 7X2DG and PY3JZ. Oddly enough though, no Ws are noted on 7MHz, the DX includes CE3PWD, Z21PO, PY2ELZ, PZ1EL, VU2AAG, CX5BW, PJ2MI, RA6LEV/JT1, 4X1MJ, 5B4MD, LU7LAQ, 4Z4BI, 9K2HA, 7X4AN, KP2/V56CT, HL1UA and EUs including C31RA. On 14MHz I see Ws, VEs, UA3P/GM0CQL, UL7AAC, 9M2CW, HL9HH, EA9TL, PY4AH, CN8ST, HK5DER, ZP5CGL, CN12DKH, ST0DX, 5Z4BP, PP7GAG, KP2/V56CT, HZ1AB, VP8CFM, YV5ANF, 9K2HA, V51JB, OD5ZZ, VU2JQ, T40PAN, KP4DBR, 7X2DB, VP25EQ, ZP5CF, 4X1FQ, YV5BTS, LU7BQ, EA9PY, LU1KKQ, OA4OS, VP8CEN and EA8LD. On 28MHz, the f.m. section of the band yielded FD1NKA, FD1NEK, G0T2M, DL4MDX, ON4AXV, FD1PPF and EA8FP.

Back in July, Brian Lucas' group reported an OT0KT at Ostend Radio celebrating Marconi. Now we have a letter from the Ostend Radio club station OR00ST. This points out that they

have never had the call OT0KT, but they have been using OT00ST as a celebration of 40 years reign by King Boudwijn, the dates for use of this special prefix being March 3 to July 21. In addition, they note a couple of Awards. For the first one, you have to show you heard or worked OR00ST or OT00ST. For the second, you have to hear or work OR0TT and the OR00ST/OT00ST. Send your certified GCR list plus five dollars or 6 IRCs to Club station OR00ST, Plovie Ronny DN6CQ, Perronstraat 6, B8400 Oostende. In either case the contact can be on any band, but not through a repeater. Thanks for a most interesting letter and clarification from the gang at Ostend Radio.

Vince Cutajar (Malta) logged YV2BYT, 8Q7CO, VP2EBN, 3C0CW, ZF2QQ, AP2JZB, ST0DX, LZ3RR, FR5DX, HC2AQ, ZL1BDW and KP2A/KP5 all on 24MHz, while 18MHz yielded FM5EP, HF0POL, CY9CWI (St Paul), 8Q7CO, VK2IP, 9L1LA, ZC4KS, HI8A, PY0FF, V31KX, AP2JZB, V44KAQ, HC2AQ and KP2A/KP5.

Patience

Mike Davis (Thornton Heath) doesn't get too much time for listening these days. However, the point of Mike's letter was to enclose his QSL - I have sent it back as requested - from VE1RCMP, the call which commemorated 50 years of RCMP. Mike sent his direct card off, along with 2 IRCs and a copy of the log, and got his QSL back, just four days short of two years later! When the card eventually turned up, Mike had completely forgotten ever sending a report; as he says, he hopes his experience will teach newcomer s.w.l.s the art of patience where QSLs are concerned!

On to **J. Scott** (Glasgow 14), who now has a SSTV program for the Amstrad; he has also been in touch with RSGB and BATC for membership - good! Listening on 7MHz produced GB2SRM, PA3F00, PA3DIP, GB300FW and GW3WFU; on 14MHz he found IK3IEQ, VE7BNW, VK3HW, UO50Q, VK3LAR, VK3WAO, LY9IZZ, HB9CCL, OH6JD, YU2CLH, GB0NTS, S9RM (Sao

Tome & Principe), OE5KPN, W20QM, W21IU, UZ4WWQ and GB0ALG; while 21MHz coped with JL1UJG, PZ1AP, W1TAK, 4X6YY, YC8ZEA, YC8VYY, KE2OP, K10IK, UA6BGB, ZS6AUH, WA2VOS, UT3UA, W0TZL and NM7R/MM. Reception by way of a G5RV or a 10m wire antenna, through a switch box to an a.t.u. Much time is spent decoding RTTY and c.w. with various bits and pieces.

Mainly CW


Andrew Marriott of Bath listens mainly to c.w. On 18MHz he found OJ0/OZ1NG, OH0/DF1NH, W6OW1, WA0CML (Colorado), K9SSB/7 (Arizona), VE7SR, ZP6CW, 4X/K2XA, while 21MHz gave PY2BDN, PY3PR, PR7JB, LZ1CY/MM, JA7AGK and ZZZYY. Just to convince himself his antenna was OK, Andrew also listened to 7MHz s.s.b. for a few minutes in the contest, to log 4U1ITU, UC70, UW2F and I1A.

D. McLean down in Yeovil notes that with the equinox conditions the 28MHz band has opened up, with N. America sometimes as early as noon until 2200UTC. On 7MHz, Don logged GW6UW/P (St Tudwals Is) and 3C0CW; 14MHz yielded ED5V DX, EX8V, HB0/DK5WN, HL2LPT, JT1CS, KP2/V56CT, KP2A/KP5 (Desecheo), RA2FM, SU1ER, SU1RR, TA1RR, UJ1K, UY0U, VKs, XE1AE, ZL4AN, 3B8FA, 3B8GA, 5H3DC and 5Z4FM. 18MHz gave A32DX/P, AL7I, ED5PAT, ES1QD/O, HI8A, JH7FMJ, PZ1EL, ST0DX, V51BG, VK3EO, VP8GAV, WA6CTX/7, Z21CS, ZB2AZ, 4U1ITU, 9K2JH and 9M2DM. 21MHz saw A22AA, BY5RT, BZ4RBV, BZ4RBX, CE4MT, CM6LE, CN8GM, D66RH, ED5V DX, EX8V, HF0POL (S. Shetlands), HG20JP, HG32P, HR3JJR, IK2HTW/IA5, IK8NIM/ID9, JAs, JT1CE, P29NCS, RA1AKB, RY8BI, RY8DI, TJ1FN, UA0FF (Zone 19), UJ8XA, UM9MY, VE7XN, VKs, VK9NS, VP2MR, VP25EQ, XY0RR, VE7XN, VKs, YJ8RN, Y88POL, ZD7DP, ZF2QQ, ZL4AN, 3C0CW, 8P9BZ, 8Q7CO, 9H8F (Comino Is), 9L3BM, 9M8ST, 9V1WW and 9X5SV. 28MHz pulled out HG20JP, KP2A/KP5, KP2/V56CT, LU8XPD (Tierra del Fuego), ZD8WD, 5B4MF and 9J2HN.

Sign-off

That's the lot for this time. Thanks to all who wrote, and to *DX News Sheet*, *The DX Bulletin*, *The DX Magazine* CQ's 'Contest Calendar' for the input; the mistakes of course are mine, hi! For next time the deadline is November 11 and December 2. For the December deadline please post in plenty of time to allow for the Christmas mailing delays.

Amateur Radio Station

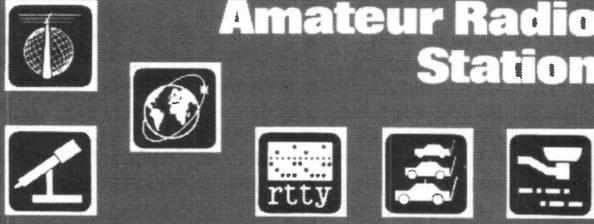

DF6FW

Thomas Beckmann, Wilhelm-Raabe-Str. 2, D-6006 RAUNHEIM/M. - DOK F 16

QSL card from DF6FW to GB2PW
14MHz band RTTY 12 November
1981.

dxtv round-up

Ron Ham, Faraday, Greyfriars, Storrington,
West Sussex RH20 4HE.

To get started in the world of DXTV **Carl Bowen** (Strelley) received 'priceless help from Garry Smith' of HS Publications in Derby. Carl is equipped with antennas and amplifiers for Bands I & III, a D100 converter and a monochrome TV receiver. Between July 26 and August 18, he received pictures from Czechoslovakia (Ceskoslovenska Televize), Italy (RAI-Uno), Norway, Spain (TVE1), Switzerland (SRG) and the USSR (TSS) in Band I and Canal+ from France in Band III. Like many readers, Carl has found that RAI and TVE have been common catches during the 1991 Sporadic-E season.

Band I

There was a period of Sporadic-E almost daily throughout August when **Bob Brooks** (Great Sutton), **David Glenday** (Arbroath), **Andrew Jackson** (Birkenhead), **Simon Hamer** (New Radnor) and **John Woodcock**, between them, identified pictures from 20 countries ranging from the Mediterranean to Scandinavia in Band I (48 to 68MHz). Their logs contained reports of seeing logos, programmes and test-cards from Albania (RTSH), Austria (ORF), Czechoslovakia (CST & ISR-P), Denmark (DR Denmark), Finland (YLE), France (TDF), Germany (ARD), Greece (ETP), Hungary (MTV), Iceland (RUV), Italy (RAI Uno), Norway (NRK), Poland (TVP), Portugal (RTP), Romania (TVR), Spain (TVE), Sweden (SVT), Switzerland (+PTT), the USSR (TSS) and Yugoslavia (JRT). The Norwegian regional test-cards encribed Bagn, Gamlem, Hemnes, Melhus and Steigen

were seen, plus clock-captions from Germany, Iceland, Italy and Norway. Adverts, athletics, cartoons, dancing, gardening, films, musicals, news, singing, sport and variety were mentioned among the programmes they saw.

Meteor Trail Reflection

On August 8, just after the expected peak of the Aquarids meteor shower, **Simon Hamer** identified 'pings' of signals, in Band III, from Denmark (DR) on Ch. E10, Finland (YLE) and Norway (NRK) on Ch. E5 and Sweden (SVT) on Ch. E8. Readers interested in this mode of propagation should leave their receivers set precisely on the vision frequency of such a channel and watch for sudden burst of picture, lasting just a few seconds as the signal is deflected by the decaying ionisation created by a meteor particles burning up in the earth's atmosphere. Of course, random meteors are entering our atmosphere all the time, but periodically, the earth, on its orbital path around the sun, encounters great swarms of these particles know as showers, most of which are indicated by their numbers in Fig. 13.

Coming soon are the Taurids, Leonids, Geminids and Ursids when there is another chance to look for reflected pictures, or, if the sky is clear and free from moonlight go outside and take a good look, especially if you live in a locality without street lights. Burning meteors and fireballs can be a fantastic and colourful sight and do keep in mind that the showers are named after the constellation of stars

from which the radiant of the meteor appears to come. Therefore one would look toward the constellation of Leo for the Leonid meteors. For the benefit of the computer buffs, Fig. 13, was drawn, with the mouse and the Microsoft Windows 'paint' program on my Amstrad PC2286/40 and reproduced on a Commodore MPS1230 printer.

Picture Archives

Bob Brooks, has been TVDXing for a long time and he kindly sent some of the early pictures that he received, via Sporadic-E openings in Band I, for you all to see. His DX in 1983 included test-cards from Austria Fig. 1, the Norwegian regional Steigen Fig. 2 and a newscaster from the USSR Fig. 3. There are three points of interest here, especially for newcomers. First, the Austrian signal is on Ch. E2A which is the same as Ch. R1 (49.75MHz), therefore it is not unusual to find the likes of Figs. 1 and 3 fighting for predominance on your screen during a big opening. Second, note the digital clock on Fig. 2, this is usually one hour ahead of us and thirdly, the Russian news caption HOB0CTH in Fig. 3. The latter may also read BPEMR. In July 1984 he saw a news programme from Spain's TVE Fig. 4 about motorway traffic and in 1985 he saw the opening programme sequence from Portugal (RTP) Fig. 5 and one of the Spanish news readers Fig. 6.

Lt. Col. Rana Roy received a strong caption from Bhatinda Fig. 7 at his home in Meerut, India, on Ch. E12 in Band III during a tropospheric opening on June 11.

Weather

The slightly rounded atmospheric pressure readings for the period July 26 to August 25, Fig. 14 were taken at noon and midnight from the barograph installed at my home in Sussex. Throughout this period, I only recorded 0.49in of rain, the weather has obviously been dry, sunny and warm with temperatures in the plus 70/80°F region.

Tropospheric

In Band III, **Simon Hamer** received pictures from Denmark and Norway on August 28 and Belgium, France, Germany, Holland and Ireland on September 4. **John Woodcock** logged pictures from France during the afternoons of August 12, 25, 27, 31, September 4 and 6. I found these French signals strong while parked near Goodwood on the 19th using a JVC3060 receiver with its own rod antenna inside my car.

After seeing interference, on August 30, on his BBC and IBA pictures from the Emley Moor Transmitter, **Andrew Lomas** (Barnsley) decided to investigate the cause. With a his son's Ferguson monochrome portable and a small set-top antenna, to his great surprise he was soon receiving pictures from the continent. Between 2132 on the 30th and 0041 on the 31st, he received u.h.f. transmissions from Anglia TV, Belgium (BRT TV2), Germany (ARD1, N3, NRD1, RTL, SAT1 & ZDF) and Holland (PTT NED3 and Lopik). In addition to American films, news and football, Andrew saw the captions Berlin Mitte, Bericht aus Bonn, Nordtext and Taggeschau (news).

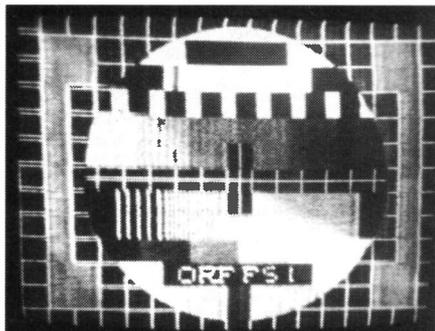


Fig. 1: Austria.

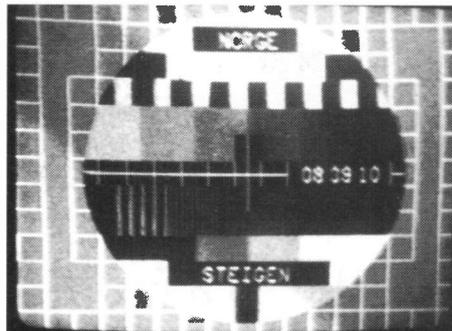


Fig. 2: Steigen.



Fig. 3: USSR.



Fig. 4: TVE Spain.



Fig. 5: RTP Portugal.



Fig. 6: Spain.

dxtv round-up

Another good haul of u.h.f. DX came from Andrew Jackson who received pictures from Germany (ARD/ZDF) and Holland (PTT NED1&3) on the 20th and on the 30/31st he logged pictures from Denmark, France and Holland in Band III, German signals from their u.h.f. stations in Aurich Fig. 8, Bremerhaven/Cuxhaven Fig. 9, Flensburg, Hamburg, Hanover, Heide/Eiderstedt, Lubeck, Nebull, Neumunster/Schleswig and Wurzburg and Holland from Goes, Lopik Fig. 10, Markelo, Smilde and Wieringermeer. Similar conditions prevailed on the 3rd and 4th of September when he again received v.h.f. pictures from Belgium (BRT TV1 & RTBF1) and France (Canal+) and from France (Antenne 2 and TF1) Holland and Germany in Bands IV and V. His tropospheric DX came closer home on the 6th, 7th, 8th and 9th when he logged signals from Ireland (RTE1 and 2).

Although on holiday, on the 31st, at a camp site at the foot of a glen about 1.5km south of Banchory, a poor location for DX, David Glenday had with him a Band III dipole and his 14in. Grundig portable. He was 'stunned' to receive pictures from Holland (Wieringermeer) of NED. 1, 2 and 3 on Chs. E39, 45 and 42 and remarked, "the only u.h.f. signals coming in apart from Durris!" He then checked Band III and found Norwegian (NRK) stations on Chs. E5, 6, 7, 8, 9 and 11. Conditions were still good when Dave returned to Arbroath on September 3 and around

1300, he logged pictures from Belgium (BRT1 & 2), Denmark (TV2), Germany (ARD1, NDR3, RTL+, SAT1 and ZDF), Holland (NED1, 2 & 3) and Sweden (SVT2) spread through the u.h.f. bands. By 1500, Dave was high on Cairn 'O Mounth with a 5in Yoko portable and, with its own rod antenna, he saw Norwegians in Band III and Dutch in the u.h.f. band.

Realising conditions were good, George Garden (Edinburgh) visited this same high spot on the 2nd and his efforts were 'very amply rewarded' with many stations that he had not seen at that location before. In addition to test-cards from Belgium (BRT TV2) and Holland (PTT-NED3), George received a 'strong colour, grain free' BBC2 signal from the Caldbeck, Nr Carlisle, transmitter on Ch.E34 and ITV 'TYNE TEES' from Bilsdale and Pontop Pike. "Around 1630 the band com-

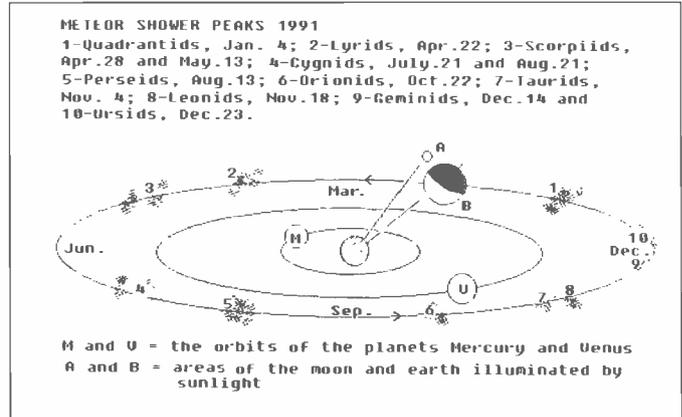


Fig. 13.

pletely opened up with a fair number of continental stations fighting for space," wrote George, adding that there was another Dutch programme just above BRT on Ch. 46 showing cartoons, lawn tennis, *Thunderbirds* and world news.

SSTV

During the month prior to September 7, John Scott (Glasgow) received slow

scan television captions between 14.227 and 14.235MHz from stations in Germany Fig. 11 and the USSR Fig. 12, both looking for contacts with others using a similar mode. John has joined the British Amateur Television Club and is delighted with their magazine *CO-TV*. He has sent for back-issues containing articles about s.s.t.v. and found it an 'eye opener' that there is 'so much scope in the amateur TV field'.

Fig. 14.

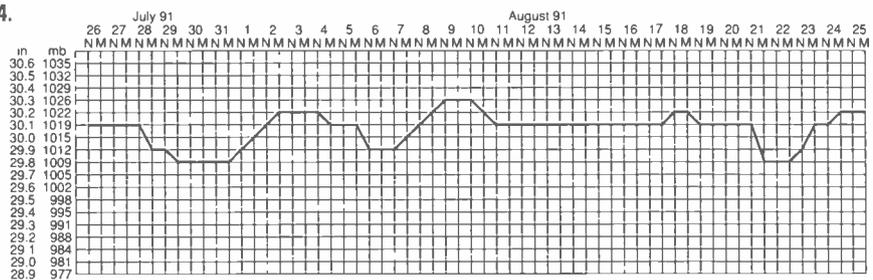


Fig.7: Bhatinda.

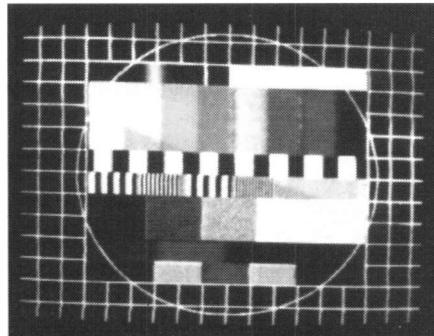


Fig. 8: Aurich.

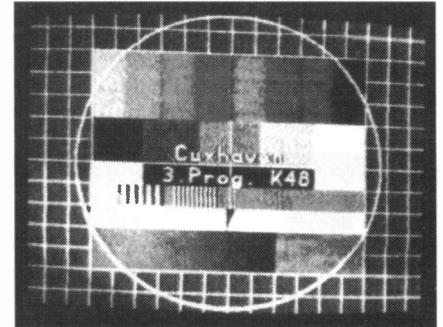


Fig. 9: Bremerhaven/Cuxhaven.

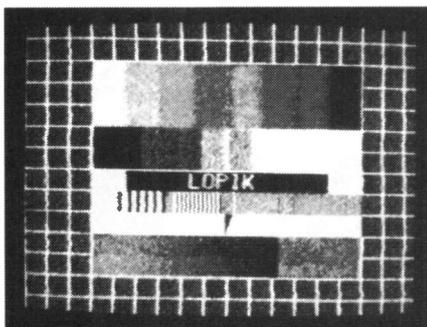


Fig.10: Lopik.



Fig. 11: SSTV from Germany.



Fig. 12: SSTV from USSR.

airband

Godfrey Manning G4GLM
c/o The Godfrey Manning Aircraft Museum,
63 The Drive, Edgware, Middlesex HA8 8PS.

Strictly speaking, the airbands are mostly occupied by communications transmissions in which one station addresses a message to another specified station. An air traffic controller, for example, will give an instruction to one particular aircraft out of the many that are on frequency at that moment. Sometimes a brief broadcast is made, such as the announcement of a change in QNH.

Three types of pre-recorded continuous broadcasts are also to be found on certain frequencies. The VOLMET announces the actual weather, and sometimes important forecast, at a series of aerodromes. This is a centrally-provided service. Next comes the automatic terminal information service (a.t.i.s.). This information is broadcast by an aerodrome and only tells you about that particular aerodrome. As well as weather, the operational runway is given along with any problems such as unserviceable navigation aids. Sometimes a.t.i.s. is broadcast via a v.o.r. beacon (example: Jersey 112.2MHz via JSY beacon), which is why it's important to make sure that 108-117.95MHz is included when choosing an airband receiver. I hope this subtle difference between VOLMET and a.t.i.s. will help clarify matters for **Sid Morris** (West Midlands).

The remaining broadcast is that of the day's north Atlantic organised track system (133.8MHz).

Information Sources

Charts and other publications (presumably recently out-of-date?) were found on sale very cheaply at the RAF Finningley airshow by **Simon Utili** (London). Simon's in the Royal Observer Corps and was hoping for some air experience flights. As things are now more difficult financially, these might not take place - but if you are lucky, and I hope you are, then write and tell us what it was like.

Elsewhere you'll see my review of *The Aviation Enthusiast's Handbook* by Kevin Fox, which I recommend. **Sam Harris** (Billericay) bought this book. Please note that I am unable to reply directly to readers, but I always try to answer queries in this column.

Bob Ramshaw G3RLD (Northampton) hoped to start a radio amateurs' aeronautical net (see September issue). I am reminded by **Capt. Leslie Greville-Smith G4SUJ** (Wolverhampton) about the International Association of Airline Hams (PO Box 82412, Atlanta, Georgia, 30354-0412, USA). Some enlightened countries allow amateur aeronautical mobile operation, so a listen on the Association's net frequencies might yield some surprises. Sunday and Wednesday it's on 14.28 and on Thursday 21.38MHz (both \pm QRM). During USA daylight saving, the net runs 1400-1700Z and 1500-1800Z

At the PFA Rally 1991: A.61 Terrier 1.

Christine Mlynek



when USA is on standard time. Leslie last flew the DC-9 for SAS; good to hear from you again.

Airways

What frequencies are contacted by eastbound aircraft once they complete their crossing of the north Atlantic? **John Fitzpatrick** (Doncaster) is asking. The simple answer is that the flights join the airways system controlled by either the Shannon or Scottish air traffic control centres. Exactly which of the many airways depends on where the actual north Atlantic track enters the Shannon or Scottish airspace. The best way to follow these is to find the route on an upper airways chart and then look up the control frequency in the airways section of the appropriate supplement. Aerad charts are as good as any, but the full choice of primary suppliers was given in October. As a rough guide, try 124.05, 126.85, 134.775 and 135.85MHz for tracks entering over Scotland and 124.7, 127.5, 131.15, 132.15 and 135.6MHz for flights arriving in Shannon airspace.

Follow-Ups

Lancaster *Aries* featured in September. I was right that someone would know its serial. **Keith Seddon G00QU** (Stockport) is that someone, PD328 was the serial. The first British aircraft to circumnavigate the world, PD328 was scrapped in January 1947 to be replaced by *Aries II*, Lincoln B2 serial RE264. One year later this Lincoln was

destroyed by a fire during refuelling and its successor, *Aries III*, was of the same type (serial RE367).

Surprising how one past event prompts so much knowledge and enthusiasm from readers. **R. John Taylor G30HV** (Crowborough) was stationed at No. 1 Navigation School RAF Shawbury at the time of the *Aries* flights. John took a three-year commission with the Fleet Air Arm before returning to the RAF. He remembers that *Aries* carried flight crew, an engine fitter, a rigger and a radio mechanic. Their achievement won each of them the Air Force Cross.

Peter Finn (Milford Haven) also recognised *Aries*. His brother, Basil, was the flight engineer on many of the sorties and found Iceland a pleasant change after the confines of the p.o.w. camp he entered, having been shot down in a Stirling.

More modern, also mentioned in September, is N112WA. This DC-10-30 was noted in service with World Airways again, this time by **Norman Locke** (Peterborough). According to **Peter Nicholson** (Huddersfield) this aircraft was leased to Lufthansa recently as well as Garuda. One Saturday at local mid-day Norman also saw a B.747 of Northwest on its way to the USA at around FL70; "A lovely sight in the summer blue sky." Wish I was there to see it, too.

Shannon VOLMET (September) is read by the same English voice as the UK v.h.f. broadcasts are. **Nicholas Austin** (Leigh-on-Sea) is, I believe, a professional meteorologist. Nicholas

prefers this voice to 'mid-Atlantic' synthesised speech, an opinion I share.

Back to the Fw 200 (May and August). An anonymous reader from Brussels kindly sent details of *Wings of the Luftwaffe* by Capt. Eric Brown, CBE, DSC, AFC, RN, edited by William Green and Gordon Swanborough and published by Macdonald and Jane's (Panton House, 8 Shepherdess Walk, London N17LW). Pages 7 to 18 describe the military career of this aircraft - in English! **Paul Hilton** (Newbury) will doubtless be interested.

Frequency and Operational News

Now that a new relay is functioning on 135.525MHz, reception of Shanwick Clearance Delivery should be improved in the south-east. I don't know the precise location of this new relay but its purpose is to enable aircraft departing the London terminals to make contact with Shanwick as early in the flight as possible.

Peter Nicholson asks about Scottish FIR frequencies. Flight information service (no radar) is available on 124.5, 124.9, 131.3 and 133.2MHz. Border Information is on 134.85MHz. To determine the exact geographical coverage of each frequency it is necessary to refer to the appropriate chart such as the half-million topo sheet 2150ABCD (current edition is 13). Of the above, Border Information is probably the region nearest to you, Peter.

In answer to **John Ware** (Redhill) and Simon Utili individual airfields, such as Leavesden, don't usually have relays but are confined to transmitters located on site. As mentioned in my reply to Sid Morris (above) the occasional a.t.i.s. is broadcast from a nearby v.o.r. beacon instead of, or as well as, from the airfield itself. The v.o.r. will be on a frequency below 118MHz whereas the direct transmission from the airfield will be on 118MHz or above (example: Biggin Hill departure information, 121.875MHz). Conversely, VOLMET broadcasts and London and Scottish Air Traffic Control Centre communications are distributed by relays throughout the country.



At the PFA Rally 1991: An immaculate De Havilland Moth.

Christine Mlynek

Alan Gardener
PO Box 1000, Eastleigh, Hants SO5 5HB.

News reaches me of a new hand-held scanner from AOR, spotted in Japan. Few details are currently known, but it is likely to be called the AR1500 and will include s.b. reception. This is achieved by the addition of a b.f.o. circuit, which will permit fine tuning of signals lying between the 5kHz receiver tuning steps. Physically it looks like a slightly stretched version of the existing AR900 and is anticipated to appear in this country early next year.

Scanning & Crime

My comments relating to the law and scanning receivers over the past few months has provoked several readers into writing, particularly regarding the monitoring of police communications. The illegal use of scanners has featured in several national newspaper reports of the current (at the time of writing) spate of joyriding, inner city riots and public order offences. It would appear that, in at least one case, the joyriders have been informed of police movements by people equipped with scanners and CB radios. In one instance, the home of a person who called the police was attacked after their address had been given over the air.

Many readers have commented that making it illegal to listen to the police is unlikely to have any effect on people using scanners for criminal activities. One reader commented on the fact that until recently (when the emergency services had to change frequencies) it had been possible to listen to the majority of police communications just using a domestic radio. He wondered why it seemed as if the authorities had only just realised that members of the public could listen to the emergency services, when it had been possible more than ten years ago without requiring specialised equipment.

Another reader thought that monitoring police communications was a relatively harmless pastime and that it was a good thing to have an appreciation of the difficulties faced by the police whilst carrying out their duties. This may be true when it doesn't involve any criminal intent, but the incident I mentioned previously occurred as a direct result of the misuse of a scanning receiver. The story doesn't end there, once the newspapers mentioned the fact that police radio channels were being monitored, members of the public became reluctant to give their own details when reporting incidents, as they didn't wish to have them passed on over the radio.

I would hope that the majority of people reading this column are respectable law abiding citizens who use their scanners in a responsible manner, but it would seem that unless a solution is found to the increasing

number of crimes involving the use of scanning receivers we may all suffer due to the misguided actions of a few individuals. This may take the form of a more stringent enforcement of existing laws or a clamp-down on the sale and ownership of scanners - which would be unlikely to have much of an effect bearing in mind the number of receivers already in circulation.


One reader thought it strange that it was not an offence to sell scanning receivers. I can't quite see the logic in this argument, as there are plenty of perfectly legitimate reasons for owning one. However, I'm sure that if the authorities had foreseen the current level of ownership a few years ago they may well have made an effort to prevent them from being sold. In the majority of cases, where scanners have been recovered from the scenes of crimes, they have been cheap 10 or 20 channel models either bought or stolen from a well-known high street store. This doesn't imply a great deal of sophistication on the part of the persons involved, but remember that even a simple scanner will permit monitoring of most current communication systems. Indeed, it may be that professional gangs of criminals using more specialised equipment have yet to be caught.

More than one reader has asked why the police don't scramble their transmissions. The simple answer to this is money. The cheapest type of scramblers use analogue techniques to modify speech patterns in such a way as to make them difficult to unscramble without specialised equipment.

Scrambling Techniques

The two most common methods of analogue scrambling are frequency shifting and inversion or time shifting and rotation. Because of the inbuilt resilience of human speech, which enables it to be understood even when severely distorted, it is difficult to effectively disguise the content of transmissions in this way. Given enough time and effort, both of these simple techniques can be descrambled. In order to provide more secure communications, digital techniques have to be employed.

The speech waveform is initially converted into a series of logical levels, which can then be mathematically manipulated to produce an encrypted serial data stream suitable for transmission. This method of encryption is very secure, as any resemblance to the original speech waveform is removed during the first stage of conversion. The subsequent mathematical encryption process can provide millions of different permutations of the basic digital waveform, making decoding extremely difficult. In order to make this even harder, the mathematical formula

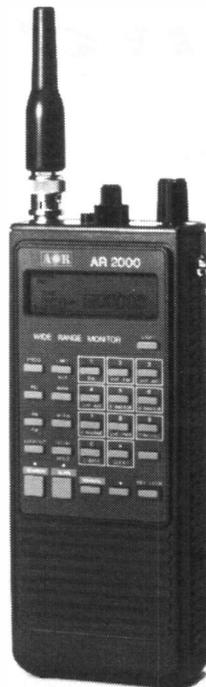

HP-100/200.

AR-1000/2000.

used for the encryption process can be changed several times a second. So, even if someone was lucky enough to find the right combination of digits, it would only be valid for a fraction of a second. This is referred to as a rolling code encryption system and is the method used in most high security military equipment.

However, the disadvantage of most digital encryption systems is that the receiver has to remain synchronised to the transmitter in some way, so that the decoder knows which code is being used and at what point it is in the mathematical sequence. This is usually achieved by transmitting some form of synchronising signal at the start of transmissions and at regular intervals during them. This works well with strong signals, but when conditions are less than perfect, e.g. when using hand-held transceivers inside moving vehicles, problems can arise. If the transmission becomes broken, the receiver may lose synchronisation with the transmitter, in which case all of the transmission up to the next synchronisation burst is lost. Clearly this is not desirable when an undercover operation is in progress as it could mean losing vital information. The better designs manage to minimise such problems by the use of clever mathematical algorithms which embed synchronising information within the encrypted data but this costs money - which makes it a major problem for most police forces.

When choosing encryption equipment, it is important to select the best system available. Simple, but cheap, analogue scrambling will only give a limited amount of security, which would discourage casual listening but would not prevent determined individuals from monitoring. This is particularly important as technology has a habit of catching up with even the most sophisticated systems in time. I would imagine that encrypted equipment will be introduced gradually over the next few years as existing equipment is replaced or as additional funds are made available. Given recent

events this may well be sooner than expected.

If you have any thoughts on this subject or any related topic why not drop me a line.

AOR Modifications

I have received a lot of feedback regarding the reprogramming of the AR1000/2000 series hand-helds after I included it in the Sept column. It would seem that a few gremlins got into the printing process which caused a headache for one or two readers.

The procedure should also work for the Fairmate HP100/200 series scanners, although I have not been able to try it personally. Note that the reset procedure will erase all of the memories so you will have to reprogram the contents of any memory channels you may have used in addition to the search band frequency limits.

As far as I am aware, it is not possible to reprogram any other scanning receivers that have separate frequency bands to give continuous coverage. It may prove possible to trick the scanner into displaying a frequency outside one of the specified ranges, but it is unlikely to contain the additional circuits required before it can actually receive signals.

The main problem most readers seemed to have was associated with identifying the correct pins on the microprocessor chip. In order to correctly locate pin 1, turn the scanner so that the top of the case with the i.c.d. is pointing to the left. Pin 1 is now at the top left hand corner of the i.c. (marked with a dot moulded into the plastics). The rest of the procedure should now be correct. If you don't want to risk soldering to the i.c. pins directly you can use an alternative method which just involves temporarily soldering a short wire link between two points on the p.c.b. as shown in Fig. 1 (shown on the next page). If you do use this method, I would suggest that you leave two insulated wire 'tails' connected to the points shown so that in future you

Fig. 1.

can perform a reset (should it be necessary) without having to completely dismantle the receiver.

It would also seem that more than one type of microprocessor has been used, so you could find that part of the procedure for extending the coverage between 600 and 800MHz doesn't work. If you find this to be the case you may have to settle for it and substitute line 5 in the original procedure for 5 [PROG] 297 [LIMIT] 600 [SEARCH] [>] 251.575 [ENTER]

For the AR2000 a modified procedure may be required. This is as follows.

As before the command keys are shown in brackets and the down arrow key as [>].

```
[BANK] 1 [PROG] 0.5 [LIMIT] 49.995
[SEARCH] 556.325 [ENTER]
2 [PROG] 50 [LIMIT] 107.995 [SEARCH]
556.325 [ENTER]
3 [PROG] 108 [LIMIT] 169.995 [SEARCH]
556.325 [ENTER]
4 [PROG] 170 [LIMIT] 286.995 [SEARCH]
556.325 [ENTER]
5 [PROG] 287 [LIMIT] 599.995 [SEARCH]
249.125 [ENTER]
6 [PROG] 800 [LIMIT] 1109995 [>] 249.125
[ENTER]
7 [PROG] 1110 [LIMIT] 1300 [>] 556.325
[ENTER]
8 [PROG] 600 [LIMIT] 799.995 [SEARCH]
58.075 [ENTER]
```

A couple of readers have commented on the apparent absence of a decimal point in the figure 1109995 in

line 6. This is correct, as the receiver automatically assumes it to be present when more than a certain number of digits are entered.


My thanks to all the readers who passed on information on this subject.

Mike Totham writes from Cheltenham with a possible solution to Julian Long's computer problem, which I asked for help with in the September column. The problem Julian had was in persuading his BBC B computer to produce a data format of 8 data bits, no parity and 2 stop bits from its comms port in order to get it to talk to his AR3000 receiver. Mike gives the following example:

```
100 A% = &9C
110 Y% = &E3
120 X% = &10
130 R =USR(&FFF4)
```

The line numbers are just for clarity, A% will select OSBYTE call &9C or decimal 156 (i.e. *FX 156), Y% will clear only the existing word select bits in the 6850 ACIA control word, X% sets the word select bits to the required 8 data bits, no parity and 2 stop bits.

Most of this information was derived from *The Advanced User Guide for the BBC Micro* by Bray, Dickens and Holmes and published by the Cambridge Microcomputer Centre in 1983, which Mike recommends if you are considering writing serious programs

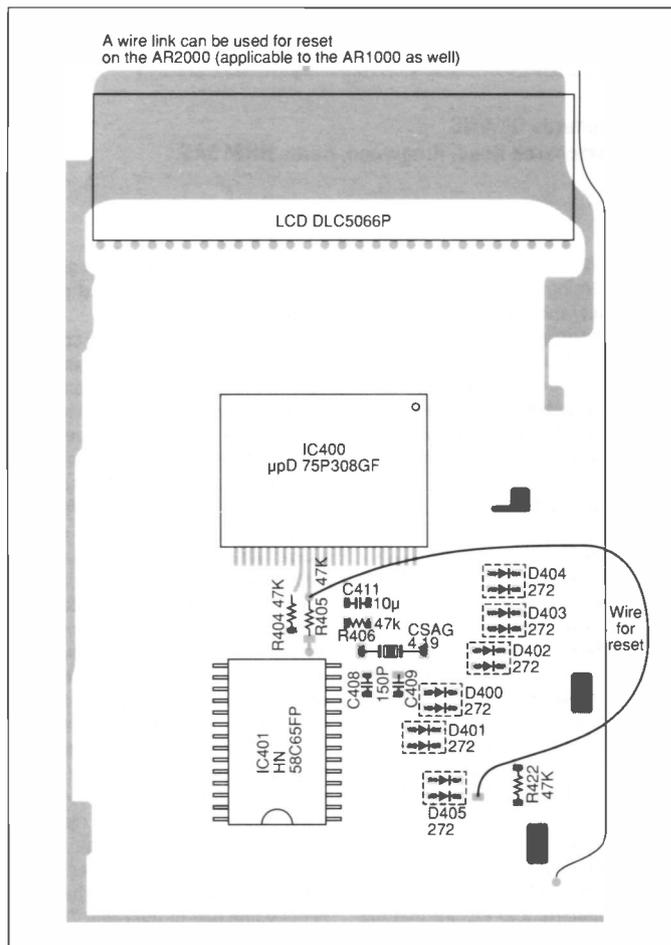

for the BBC. My thanks to him for passing on the information which I hope will be of value. Let me know how you get on Julian.

Well that's just about it this time around. I hope that you enjoy reading the *What Scanners* supplement and that

you take the opportunity to try and win the AR2000 hand-held scanner on offer in the free competition. Until next month -

Good Listening.

airband

➔ 51

I haven't yet come across any allocations in the new 136-137MHz sub-band which is now available but I believe that this segment would be available for airways control if the need were to arise.

Few USAF aircraft are fitted with SelCal but VC-25 No. 29000 operates as Air Force Two (the Vice-President's transport) and its SelCal is AE-LP. Remember to add this to your copy of *High in the Sky*. Staying with the USAF, their Thunderbirds display team talk to each other on 141.85MHz a.m. Their support aircraft is a C-141 Starlifter which rather puts our Red Arrows' Hercules in the shade. Thanks Paul Hilton for this USAF news.

How about the Soviet display team? The Red Knights were due to be at the RAF Leuchars display this year - and so was **Alastair Turnbull** (Helensburgh). Most displays are controlled on the airfield v.h.f. frequency but the military sometimes use u.h.f. where required. Do the Red Knights have their own frequency to talk to each other (presumably in Russian) during display? Leuchars Approach: 126.5 primary, 257.7,



At the PFA Rally 1991, the author admiring the characteristic Jodel wing shape.

Christine Mlynek.

362.3MHz. Tower: 122.1, 269MHz. Director surveillance radar: 123.3, 288.3MHz. PAR: 318.1 primary, 252.3MHz.

Just like **B.D. Berman** (Burton-on-Trent) I can't understand the choice of which aerodrome is reported on which of the three London VOLMETs. I assume the arrangement satisfies users' requirements in some way. The relays are as follows. Main (135.375MHz):

Davidstow Moor, Warlingham; covers Amsterdam, Brussels, Dublin, Glasgow, Gatwick, Heathrow, Stansted, Manchester, Charles de Gaulle. South (128.6MHz): Davidstow Moor, Ventnor, Warlingham; covers Birmingham, Bournemouth, Bristol, Cardiff, Jersey, Luton, Norwich, Southampton, Southend. North (126.6MHz): Great Dun Fell; covers Blackpool, East Midlands, Leeds and Bradford, Liverpool,

Gatwick, Manchester, Newcastle, Ronaldsway, Teeside.

Receiver Problems

In August, Des Reed (Malton) was having problems understanding the instructions for connecting power to the AR1000. A helpful hint from **R. Raeburn** (Elgin) suggests that the supplied lead can be connected to a car's power system (presumably via the cigarette lighter socket) and battery charging plus receiver operation is presumably then possible. Mains supply, again for reception plus charging, can be obtained from the JIM PSU 101 which is advertised in this Magazine. Make sure you specify which receiver your PSU 101 is to be used with.

Until next month, I thank you for all your interesting letters.

The next deadline (for topical information) is November 11. All correspondence to 'Airband,' c/o The Godfrey Manning Aircraft Museum, 63 The Drive, Edgware, Middlesex, HA8 8PS.

Mike Richards G4WNC
200 Christchurch Road, Ringwood, Hants BH24 3AS.

I thought I'd better start this month with a warning that I might be a little late with my replies over the next month or two. This is all due to a new arrival that's expected at the end of November. No doubt chaos will reign for a period thereafter. (Not only at 200 Christchurch Road! - Editor.) So please accept my apologies in advance!

Readers' Letters

Mr J. Howe from Horsham in Sussex is an amateur astronomer and would like to receive satellite images. There are two basic routes to achieving this:

- 1: h.f FAX or
- 2: v.h.f./u.h.f. satellite reception.

The h.f. FAX option is the area dealt with via this column and probably the most popular signal is the Meteosat images that are re-broadcast from Offenbach Meteo on 134.2kHz. To receive these, you need a receiver and antenna that will operate down to 130kHz plus a FAX decoder. If the satellite images are the main interest, then it's important to ensure that the decoding system is capable of displaying a grey scale. If you have an IBM compatible computer, there are several very good packages available at around the £100.00 mark. If you're starting from scratch and want to avoid computers, you should look at some of the self contained decoders such as those from Universal. I'd strongly recommend that anyone considering this route should visit one of the specialist dealers and spend some time making sure that it does meet your requirements.

If you choose the v.h.f./u.h.f. option, you can receive satellite images direct from the satellite itself. For more information on this keep an eye on Lawrence Harris' 'Info In Orbit' column.

John Dimond of Milnerton, South Africa has recently moved and taken the opportunity to set-up a new utility station. The main change is the inclusion of an IBM PC and the very powerful Code-3 decoding package. In answer to my recent query about DYN transmissions, John reports regular reception of press pictures on 9.2399MHz. The prime time for pictures seems to be between 1900 and 1945UTC.

Multi-path

Over the months I have made reference to the problems caused by multi-path propagation but haven't provided a full explanation. So here's my chance to put that right.

Let's start by explaining what is meant by the term multi-path propagation. Quite simply, it is used to describe the case where a signal travels from the transmitter to the receiver using more than one route. I've shown an example of this in Fig. 1. From this, you can see that one route is the direct path that is known as the ground wave.

The second route I've shown goes via the ionosphere and is called the sky wave.

The next point we need to consider is the effect that multi-path has on the received signal. To fully appreciate this aspect, we need to return to some basic theory relating to the speed of a radio signal. For the purpose of these calculations, we can use the speed in free space which is 300 000km/second - the real speed is actually slightly slower due to the effects of the earth's atmosphere. If we now calculate the time taken for the two signals to travel from transmitter, we can work out the difference. My calculations show the ground wave as 0.67ms and the sky wave as 1.2ms. The important point, however, is the difference between the two, 0.53ms in this case. Now, this may seem very small, but it can have a significant effect on some forms of utility signal. Probably the most severely affected are FAX signals, where this delay produces a form of echo that results in every vertical line having a second line just to the right. This obviously destroys some of the fine detail in the chart. It's also important to realise that, in the real world, signals are rarely subject to one multi-path route and have very complex interference patterns.

These complex patterns produce

severe smudging of FAX signals. I've shown a typical example in Fig. 3. The effect is very similar to the ghosting caused by a poorly aligned TV antenna. The TV ghosting is also caused by multi-path propagation, but over much shorter distances. Another important point to appreciate is that multi-path reflections can be caused by all manner of objects, and not just the ionosphere, typical examples being large buildings and hills. When receiving DX signals you may also receive signals by both the long and short path. I've shown an example of this in Fig. 2. As you can see, the time difference in this case is likely to be significant, so you would probably see a very distinct echo on a FAX chart.

So what, if anything, can be done to reduce the effects of multi-path? With the TV signal the solution is usually to position the antenna to null-out the unwanted multi-path signal. This is only possible because there is normally only a couple of signals to choose between. On h.f., the problem is rather more complex as there are likely to be many different multi-path signals coming from different directions. This is further compounded because few listeners have the space to be able to create steerable h.f. antenna systems. However, all is not lost as there is one solution that is available to all. You will

have noticed that most of the large Meteorological authorities transmit the same charts on a number of frequencies spread throughout the h.f. bands. These frequencies have been carefully chosen to ensure that their signals can be received through a wide range of propagation conditions. The trick, therefore, is to try a number of different frequencies and pick the one that produces the best results. You will find that optimum frequency changes according to both the season and the time of day.

If you'd like a practical demonstration try tuning-in to Bracknell Meteo on the following frequencies: 2.6185, 4.782, 9.203, 14.436 and 18.261MHz. Remember, the results will vary according to the time of day. The format used by this station is 120 r.p.m. with an IOC of 576. Incidentally, it's multi-path propagation that is largely due to the fading experienced by many broadcast signals.

If you have any utility related subjects that you'd like me to explain, please drop me a line and I'll do my best to help.

Schedules

Mr W. Willes from Dorchester has written this month with the latest schedule for the Yugoslavian news agency TANJUG. In view of the troubled political situation, transmissions from this station are particularly important. TANJUG has also recently changed its transmission process so they're particularly keen to receive QSLs to confirm that their coverage has not been compromised. The transmissions described here are all 50 baud RTTY using a shift of 400Hz.

English Service

- 11.604MHz (YZJ2), 0400-1700UTC, SE Asia
- 13.44MHz (YZJ5), 0400-1700UTC, Far East
- 12.2125MHz (YZ07), 0400-1700UTC, Europe, Africa, Mid. East.
- 7.658MHz (YZD), 0400-1700UTC, Europe, Africa.
- 7.996MHz (YZD9), 1700-0400UTC, SE Asia.
- 7.806MHz (YZD7), 1700-0400UTC, Far East.
- 5.24MHz (40C2), 1700-0400UTC, Europe, Africa, Mid. East.
- 7.658MHz (YZD), Europe, Africa.
- Sundays 0900-2200UTC, Monday from 0900UTC.

French Service

- 15.705MHz (YZJ6), 1100-1400UTC, W. Africa.
- 10.278MHz (YZA9), 1700-1800UTC, W. Africa.
- 7.592MHz, (YZD6), 1900-close-down, W. Africa.
- Sunday 1300-2000UTC

Spanish Service

- 19.8655MHz (YZJ4), 1600-1800UTC, S. America.
- Not Sundays.

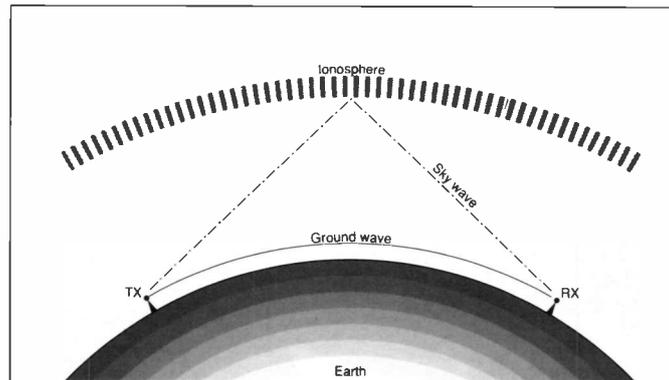


Fig. 1: Multi-path propagation.

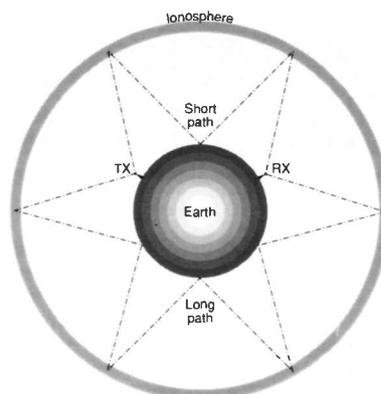


Fig. 2: Long and short paths.

TWO-WAY RADIO ● AMATEUR RADIO ● AUDIO VISUAL ● SALES & SERVICE
58 High Street, Newport Pagnell, Bucks MK16 8AQ. Tel: (0908) 610625 FAX: (0908) 216373

AR-3000 – The Ultimate Receiver



AR-3000 £765 p&p £5.00

It is an acknowledged fact that AOR are the foremost manufacturer of VHF/UHF monitoring receivers in the world. In the AR-3000, even AOR have excelled themselves, because they have produced what is without doubt the ultimate receiver for wide band monitoring use. Designed for the professional market, the AOR-3000 is nevertheless affordable by the listening enthusiast, and the specification is enough to make any keen listener want this astounding receiver. Brief details:- Imagine a frequency coverage from 100kHz to 2036MHz; that's from below Radio 4 on the long wave to beyond satellites on 1.7GHz; and there are no gaps in the tuning range. Any frequency within this astounding range is yours to use as you wish • Imagine all mode facilities, including AM, FM (communications), FM (broadcast), Upper Sideband, Lower Sideband, and even CW, yours to command with the AR-3000 • Imagine tuning in 50Hz steps for accuracy on SSB/CW, with any step available at your choice from 50Hz to 100kHz, selectable in 50Hz increments. For really high speed tuning you can even increase all the steps by a factor of 10 by a touch of the main tuning knob • Imagine 400 memory channels in 4 banks of 100, with each bank having its own priority channel and each bank having its own programmable search system • Imagine high speed scanning at 20 channels per second, each memory channel having frequency, mode and RF attenuator setting stored safely in it • Imagine having a real time clock for accurate logging • Imagine having a built-in RS-232 computer interface for total control by a personal computer • Imagine having all this with outstanding performance which AOR built in to their famous AR-2002, but have now improved on for the AR-3000.

ACEPAK-3 Software for Computer Control of AR-3000 £119.95 p&p £3.00

IC-R72 Communications Receiver



ICOM's communications receivers have a reputation for reliability and quality. Building on this reputation, the IC-R72 HF receiver is one of a new line of wideband receivers to satisfy listeners everywhere. This compact receiver has continuous coverage from 100kHz-30MHz, in SSB, AM and CW modes. An optional UI-8 adds FM reception. The easy to operate IC-R72 is superb for beginners or experienced DXers alike and is equipped for a variety of functions.

Price £659 Carr. £12.00



HF-225

HF-225 HF general coverage Receiver, 30kHz to 30MHz..... £429.00 **£12.00**
(The HF-225 has been voted "Receiver of the Year" by World Radio TV Handbook, against all other manufacturers products).

- Options:
- D-225 Synchronous AM and FM detector £40.40 £2.00
 - K-225 Keypad for direct frequency entry..... £40.40 £2.00
 - B-225 Internal NiCad battery pack..... £50.60 £3.50
 - W-225 Active whip aerial £19.95 £3.50
 - C-225 Deluxe carrying case for HF-225 £30.15 £4.00

R-5000



R-5000 Kenwood HF communications receiver, 100kHz to 30MHz **£895.00** £12.00

OPTIONS:

- DCK-2 12 volt dc power kit £9.50 £2.00
- VC-20 VHF converter for 108-174MHz £170.85 £4.00
- VS-1 Speech synthesiser for R-5000 £33.00 £2.00
- YKBB 16kHz AM crystal filter £50.45 £2.00
- YK88C 500Hz CW filter £47.10 £2.00
- YK88CN 270Hz CW filter £55.85 £2.00
- SP-430 External speaker unit £41.70 £4.00

AR-2000

Hand-held wide band scanning receiver. Improved specification. The coverage is 500kHz - 1300MHz with no gaps. Modes are AM, FM (narrow) and FM (wide). The AR2000 features 1000 memories for spot frequencies and 10 search banks. The receiver is powered from its supplied internal nicad batteries but these may be removed and dry batteries substituted to allow extended operation in the field. The AR2000 may also be charged and powered from the car cigar lighter socket using the supplied lead. Also supplied as standard are the DA900 wide band aerial, soft case with strap and AC charger.



R.R.P. including VAT **£259**
(p&p £5).

AUTHORISED AGENTS FOR KENWOOD, ICOM, YAESU & STANDARD. FULL SERVICE FACILITIES AVAILABLE

SPEND UP TO £1,200 INSTANTLY WITH A PHOTO ACOUSTICS LTD. CREDIT CHARGE CARD

PART EXCHANGE WELCOME, ASK FOR KERRY G6IZF OR ANDY G4YOW

RETAIL SHOWROOM OPEN MONDAY - FRIDAY 9.30 - 5.30, Saturday 9.30 - 4.30

Goods normally despatched within 24 hours. Please allow 7 banking days for cheque clearance. Prices correct at time of going to press - E&OE



English Regional Service
 11.604MHz (YZJ2), 0400-0500UTC, SE Asia.
 13.44MHz (YZJ5), 0400-0500UTC, Far East.
 Sunday and Monday only
 16.343MHz (YZI4), 1300-1400UTC, E. Africa.
 20.204MHz (YZJ), 1300-1400UTC, S. Africa.
French Regional Service
 20.204MHz (YZJ), 1200-1300UTC, S. Africa (Angola).
 QSLs should include a SINPO report and it might be a good idea to include a sample print-out. The correspondence address is: TANJUG World Service, Obilicev Venac 2, Post FAH439, BELGRADE, Yugoslavia.



The station as operated by Harry Scrase.

Photo-Call

The featured listener for this month is **Harry Scrase** from Sandwich in Kent. Harry has been a keen short wave listener for many years and is a member of the International Short Wave League. You can see from the photo that Harry has a very impressive equipment line-up. The main receivers comprise an Icom R-9000 and the NRD-525 these are fed by two Datong active antennas and a discone mounted externally. On the decoding front Harry uses the very comprehensive Wavecom W-4010. This is complemented by a CWR-675 stand alone RTTY decoder.

My thanks to Harry for taking the trouble to write. If you would like your station featured, send me a photo of you and your station with as many details as possible.

RTTY Contest

Bo Ohlsson from Fellingsbro in Sweden has written with details of the SARTG amateur RTTY contest that takes place on New Years Day. For those of you who may not have come across these contests, I'll outline what happens. The main objective is to contact as many stations as possible from as far away as possible. Points are awarded for each contact and additional points are gained for different countries and continents.

In order for a contact to count, a standard message has to be exchanged between each station. This usually comprises a three digit serial number, signal report and, of course, the call signs. The main enjoyment in these contests comes from testing the skills of the operator, but many short wave listeners do join-in. Most contests, including the SARTG one, have separate sections for short wave listeners so you can win a certificate. If you'd like more information write to Bo Ohlsson SM4CMG, Skulsta 1258, S-710 41 FELLINGSBRO, Sweden.

Press Photos

For those of you with the ability to receive FAX images with a grey scale, press photos seem to be the most popular. For this reason, I've pulled together a few of these stations that you might like to try. One of the most popular, and consistent, is DPA Frankfurt (DCF39) on 139kHz. This uses a narrow shift of 150Hz combined with a drum speed and IOC of 120/352. The transmissions seem to be pretty well continuous between about 0300 and 2300UTC.

One of my own personal favourites is the Associated Press transmissions from Buenos Aires. Normally the best frequency is 17.672MHz (LQZ67), but other frequencies to try are: 10.6795MHz (LRN2) and 20.736MHz (LSA600). The main problem with reception of this station is adjacent channel interference, but this can usually be minimised by careful use of the pass band tuning. Just to complete the picture (excuse the pun) here are a selection of stations you might like to try:

- 4.316MHz (JJC), Tokyo Radio, 160/288 or 120/576.
- 5.117MHz (3MA29), CNAT Taipei, 60/288.
- 5.7775MHz (LRO26), AP Buenos Aires, 60/288
- 6.874MHz (LRB79), AP Buenos Aires, 60/288
- 7.3637MHz (HMF88), KCNA Pyongyang, 60/288
- 9.242MHz (LRO64), DYN Buenos Aires, 60/288
- 10.679MHz (LRN2), AP Buenos Aires, 60/288
- 13.7535MHz (LRB75), Reuters Buenos Aires, 60/288 (rarely heard)
- 13.9MHz, Unknown, 120/576
- 16.23MHz (JAQ66), Kyodo Tokyo, 60/576
- 17.62MHz (LQZ67), AP Buenos Aires, 60/288
- 20.736MHz (LSA600), AP Buenos Aires, 60/288

If you have any particular favourites, please write with the details.

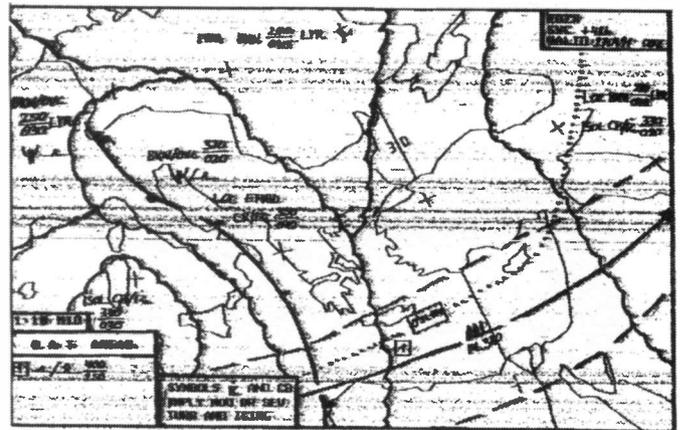


Fig. 3: Severe smudging of a FAX signal as shown in *Klingenfuss Guide To FAX Stations*.

Frequency List

Now for this month's selection of frequencies. I've used the normal format of frequency, mode, speed, shift, call sign, time and notes. If you would like a copy of my latest list just send three 1st or 2nd class stamps to the address at the head of the column.

- 3.55MHz, RTTY, 50, -, YMA20, 0005, Ankara Met
- 4.2585MHz, RTTY, 75, -, GYA, 0150, Royal Navy
- 6.358MHz, RTTY, 75, 400, PBC, 1523, Dutch Navy
- 7.959MHz, RTTY, 50, 400, 9BC23, 1816, IRNA Tehran - News
- 8.030MHz, RTTY, 50, 400, IRF50, 0950, Rome Press ANSA
- 8.049MHz, RTTY, 50, 400, -, 1945, IRNA Tehran - News
- 8.14MHz, RTTY, 50, 400, -, 0450, TASS Moscow
- 8.437MHz, CW, -, -, 4XZ, 0230, Israeli naval
- 8.574MHz, CW, -, -, LGB, 0230, Rogaland radio
- 8.652MHz, CW, -, -, PCH40, 0215, Scheveningen Radio
- 8.6835MHz, CW, -, -, DAM, 0610, Norddeich radio

- 8.687MHz, CW, -, -, SVA4, 0410, Athens radio
- 8.697MHz, CW, -, -, CFH, 0420, Halifax naval
- 9.43MHz, RTTY, 50, 400, -, 0820, Tirana press
- 9.797MHz, RTTY, 50, 400, -, 0910, Rompress
- 10.634MHz, RTTY, 50, 400, CNM37, 1550, MAP RABAT
- 10.792MHz, RTTY, 75, -, VoA, 0001, Voice of America
- 11.063MHz, RTTY, 50, 400, -, 0900, Sofia met
- 11.08MHz, RTTY, 50, 400, YKP28, 1816, SANA Damascus - News
- 11.475MHz, RTTY, 50, -, HMF52, 1855, KCNA Pyongyang English news
- 11.638MHz, RTTY, 50, -, DDK8, 0450, Hamburg Meteo
- 12.801MHz, CW, -, -, TAH, 1135, Istanbul radio
- 14.49MHz, RTTY, 50, 400, -, 0940, TASS Moscow
- 16.136MHz, RTTY, 75, 400, BZR66, 1230, Beijing press
- 17.06MHz, CW, -, -, 4X0, 0505, Haifa
- 18.125MHz, RTTY, 50, 400, RND70, 1323, TASS Moscow

Lawrence Harris

5 Burnham Park Road, Peverell, Plymouth, Devon PL3 5QB.

The summer months have brought many pictures for this column and so I am including more of these than usual. Another trend has been the number of requests for information for beginners. Since the special *Weather Watching* supplement was published last April new products are reaching the market and others are being upgraded.

Current WXSATS

As of mid-September all four of the NOAA WXSATS are in operation, but as the passes overlap, one or more are switched off. Until recently, NOAA 10 took priority over NOAA 12, but this changes as from September. So we should now have NOAA 12 transmitting during pass clashes with NOAA 10. NOAA 9 is now considered to be 'experimental' though the tests are likely to affect only the h.r.p.t. data. There was a report that the minute markers on NOAA 12 had disappeared, but I never saw them missing. The detail at the edge of NOAA pictures can be seen in Fig. 1. It includes the markers, and where you can resolve the markers on your own systems you will know that each has two lines. The other side of the frame shows the minute scales and can be used to adjust your picture for best quality.

METEOR 3-5 operated for a few hours following its August launch, but has been silent since. I don't think that this indicates a fault - other METEORs have been operated similarly, being tested for 24 hours after launch and then having their a.p.t. switched off. METEOR 2-19 remained operating for several weeks, but predictably, as it approached the morning terminator in mid September, it was switched off and METEOR 2-20 commanded back on, using the same frequency (137.85MHz). METEOR 3-4 has been transmitting both visible and i.r. as normal.

The Chinese controllers have managed to partially stabilise the attitude of FENG YUN 1B and it is now transmitting, but only while near China! GOES continues to wander above and below the western horizon here in the

UK. Its position cannot be adjusted, or 'ranged' as the controllers call it, and so is not transmitting in a fixed direction. From western Britain it rises to some 15° above the western horizon during the mid afternoon, but dips below during the early hours of the morning. Several *SWM* readers have been able to monitor afternoon transmissions. Just a few degrees to the left of GOES is the 'borrowed' METEOSAT 3 geostationary satellite, now called Atlantic Data Coverage (ADC) and operating the schedule mentioned last month. METEOSAT 4 has continued to broadcast scheduled imagery - and see the later paragraph labelled AVHRR pictures.

Summer Views

Following the reports from America about NOAA 9 having problems, I had a close look at the evening pictures during the hot summer patch in early September. The warm Atlantic and North Sea show up very well in the infra-red section, with Paris, London and Birmingham particularly identifiable. In fact, with such clear skies, the variations in water temperature around the UK and the continent gave the impression of 3-D pictures. Water near the shores is considerably warmer than that in the middle of the Channel. Similarly, the waters of the sunny Mediterranean were revealing fascinating temperature differentials. To see the complete picture you do need to view with 64 grey levels, so bear that in mind when considering either upgrading or purchasing from new.

Although some of the snow has melted on the Swiss Alps, they remain easily recognisable for the whole year. Have a glance at Mount Etna in Sicily, which always stands out well. Lastly, the ice-flows along the south eastern coast of Greenland retreat during summer and allow warmer water to go further inland - all very easy to monitor in both infra-red and visible.

UoSAT 5 Pictures

I regularly publishes readers' pictures

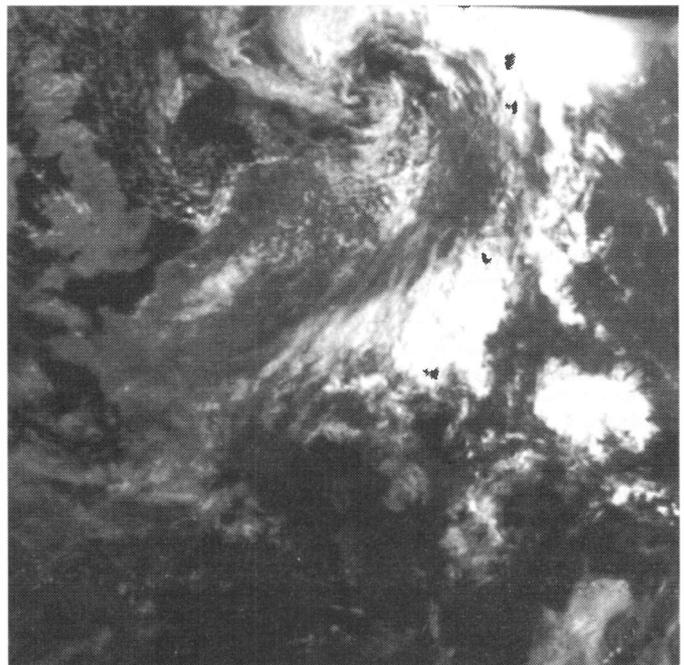


Fig. 1: Europe seen by a NOAA, from Jim Granville.

obtained from the usual WXSATS and for future editions I am hoping to obtain some of the very high resolution ones from ESA and NOAA. The University of Surrey are also involved in satellite imagery, under **Professor Martin Sweeting G3YJO** and his group who control the UoSAT satellites. UoSAT 5 is the fifth in the British series of small low-cost spacecraft and is fitted with a CCD Earth Imaging System. It was launched alongside ERS 1 on July 17, has a resolution of 2km and carries out sophisticated on-board image data compression and processing before transmission.

Professor Sweeting has kindly sent me a transparency together with some details about the satellite, which has already transmitted images of the Mediterranean, Gulf States, Korea, Hawaii and many other regions with superb resolution, comparable to the NOAA satellites. The ground controllers at Surrey University are able to routinely program the satellite to record imagery while passing over various areas and store the data until within range of the University. Professor Sweeting points out that within a budget of £1M they now have a satellite independent of governments or the military, able to monitor world-wide weather and climate. I will be providing more information about UoSAT 5 in

future editions and extend both my thanks and our congratulations to the Professor and his team at Surrey. It is pleasing to hear of successes in the British space programme at this time.

Letters

Many letters continue to request Kepler elements, and these are normally updated each week from NASA information. Correspondents usually take the opportunity to describe their satellite monitoring activities, which is welcome. **Geoffrey Chance** of Redruth uses the APT-1 module from Technical Software for decoding pictures and told me that he had some problems getting properly synchronised pictures. The fault was eventually traced by Richard Wilmot of Technical Software and Geoffrey mentions Richard's courtesy and patience. Geoffrey promises some print-outs as soon as he has mastered the setting of the grey levels!

A wide range of questions were posed by **Terry Day** of Hull. He has an AT (advanced technology) compatible computer and now wants to purchase hardware and software for satellite decoding. Terry points out the range of prices and facilities offered by the main suppliers of WXSAT equipment and wonders whether they all do the same

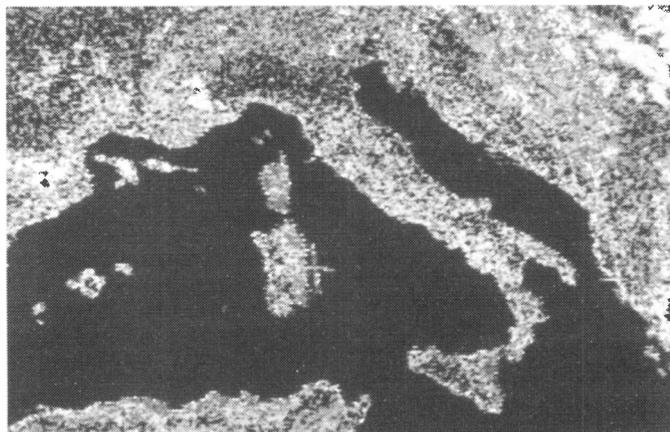


Fig. 2: Italy scanned by METEOSAT, from Peter Cotton.

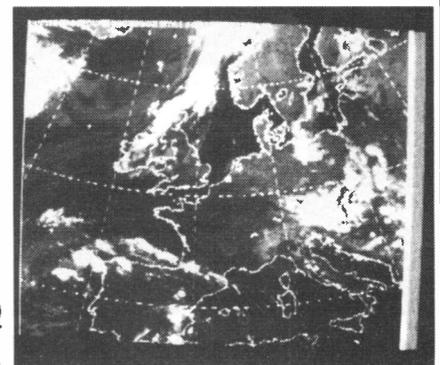


Fig. 3: Europe (AVHRR) scanned by METEOSAT 4, from Brian Dudman.

job. Careful checking of program specifications is essential. Decide which facilities are particularly wanted: picture quality, picture processing (i.e. the ability to add false colour and stretch the contrast), animation, automatic data capture; these may be included or absent and one must also check whether the computer can run them without hardware modifications.

Yachting is a hobby shared by several readers of this column, including **Andrew Freeman** of Wallasey. There is an increasing variety of weather satellite picture decoding equipment being produced for the yachting fraternity, suitable for using on board. The normal crossed-dipole antenna should be satisfactory because there is no need to point the antenna at the satellite - receivers are sensitive enough to pick up the powerful signals, particularly at sea where reflections from nearby buildings, and interference from paging units must be negligible! I don't personally know of specific units, but I know a man who does - so I'll see what is available.

Ch Harper of Blackpool has recently started WXSAT monitoring, using a Martelec receiver fed from a Microwave Modules METEOSAT antenna and down-converter. I saw a picture of this antenna some years ago and it seemed very large. Incidentally, I believe that Microwave Modules have finished their involvement in the amateur market, their products having been taken over by Timestep Weather Systems.

David Brown of Port Erin has upgraded his previous framestore-type decoding system to the Proscan receiver from Timestep. This is one of the units which is apparently immune to interference, so I await reports from users. David feeds the signal into a 286 (i.e. an 80286) computer fitted with an SVGA monitor and PC SAT3 software. He also recently received a book called *The Illustrated Encyclopedia of Space Technology* published by Salamanda, which he recommends.

E J Finch of Peterborough has two satellite systems, one uses Timestep's

PCSAT3 with a 0.9m dish feeding a 386 PC (i.e., a computer fitted with the 80386 processor) and 4Mb of RAM, which he leaves running 24 hours a day in animation mode. The other is for the polar orbiters using the Timestep Proscan receiver. Mr Finch comments that he is sure that FENGYUN 1B was recently transmitting again on 137.80MHz, even though only for a few minutes, and was intermittent. As mentioned before the Chinese are trying to correct the problems with FENGYUN's attitude (pointing accuracy), so we may well hear it at sometime.

Bob Warriner of Lancing has upgraded his fixed dish system to a steerable unit and can now monitor GOES. I have mentioned the movement of GOES near the horizon, which Bob experiences, and he asked about a GOES replacement. It seems that the next GOES will not be launched until possibly 1992 because of problems. That is why METEOSAT 3 was moved nearer the USA. Interestingly Bob picks up the METEOSAT 4 signal while pointing near GOES. Perhaps there is a local reflection.

METEOSAT Schedules

Bob asks about obtaining a METEOSAT 3 transmission schedule. This, together with the slightly modified METEOSAT 4 schedule, is available from EUMETSAT at: Am Elfen grund 45 D-6100 Darmstadt-Eberstadt GERMANY.

Framestore Components?

I had a call from **Graham Smith G1JZV** of Chislehurst who wants to build a framestore, but he has not been able to find a component supplier. Can anyone help? Originally one could purchase a kit of all the parts.

AVHRR Pictures

A telephone call from **Donald Martin** of Cleveland pointed out the new experimental WEFAX pictures from METEOSAT 4, which he monitored using PCGOES. I didn't spot this addition

to the schedule - called simply AVHRR. The times are 0726, 1026 and 2226UTC when a transmission of the UK and Europe, as seen by the NOAA AVHRR sensors, can be received. A picture of this frame was sent to me by **Brian Dudman** of Harrow and is shown in Fig 3. Brian is using a Timestep Yagi, pre-amp and METEOSAT receiver feeding a Mitac 286 AT computer. Brian comments that, not being familiar with computers he had a lot to learn and had difficulty setting up the monitor. He points out that not all hardware is water-proof and that items such as pre-amps need to be protected against the elements.

My own down-converter suffered some corrosion even though it was apparently weather-proof. I now operate it within a plastics 'sandwich' box and bring it in for occasional checks. Brian has also bought Timestep's Prosat2 software and a second computer! There will be more pictures from Brian next month.

Correspondent **Peter de Jong** of Leiden in Holland has sent in his detailed monitoring observations and some more photographs, and comments that you can see the Japanese GMS satellite pictures by watching the JSTV programme on Channel 24 broadcast by the Astra 1B satellite. Tune in at about 2145 and 2315UTC and you may see the whole disk picture. See also Fig. 6.

Geostationary Satellites

Apart from METEOSAT and GOES there are literally hundreds of satellites in the geostationary orbit. **Goran Billing** of Bournemouth asked about obtaining a list of them. My own list is now four years out of date, but this type of information is published in *Satellite News* which is a specialist monthly publication edited by Geoffrey Falworth of Preston. I am happy to forward any mail for Geoffrey. The weathersats mentioned above all use 1691MHz for their WEFAX transmissions so obviously if you can receive METEOSAT then there are currently three satellites to monitor.




Fig. 4: South America scanned by METEOSAT 3, from Brian Dudman.

Australia

While visiting Britain, **Professor Gerald Sargent** of Brisbane in Australia rang me and told me about their groups that monitor weather (and other) satellites. He was particularly surprised at the cost of equipment in the UK. It seems that satellite picture decoding hardware and software is rather cheaper in Australia, though many people build their own as a project.

Kepler Elements

As usual, I will send a print-out of the latest elements upon receiving an s.a.e. All weather satellites are included, together with their transmission frequencies if operating. I recently received such a request from **Josep Bruno Argilagueta** of Spain who is a member of a Spanish group who are interested in meteorology. They are particularly keen on monitoring METEOSAT.

InstantTrack

Some readers may have heard of recent controversy involving this software which is currently marketed by both Timestep Weather Systems and AMSAT-UK. The problems were resolved and no purchaser of this software should feel concerned.

New Book

During the time that I was setting up my own satellite receiving system I had difficulty in locating information and suppliers for some items, and so I kept notes on the various problems that I came across. Since then I have received many questions about setting up similar stations and other satellite matters, so I am putting together a book on satellite monitoring and hope to see publication, through PW Publishing next spring. Further details will appear in future months, but meanwhile I shall be glad to hear from anyone who has any suggestions to make about possible items for inclusion. August was a record month for letters and photographs so several have been held over until the next edition.

Frequencies

NOAAS 9, 11 a.p.t. on 137.62MHz
NOAAS 10, 12 on 137.50MHz
METEOR 2-19 or 2-20 on 137.85MHz
METEOR 3-4 or 3-5 on 137.30MHz
OKEAN 2 and 3 on 137.40MHz occasionally
FENGYUN 1-2 was on 137.80MHz (keep watching this!)

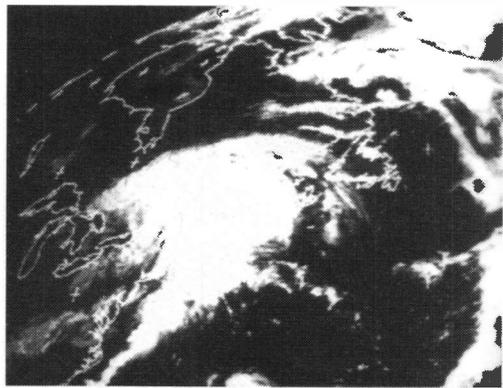


Fig. 5: North America scanned by METEOSAT 3, from Peter de Jong.

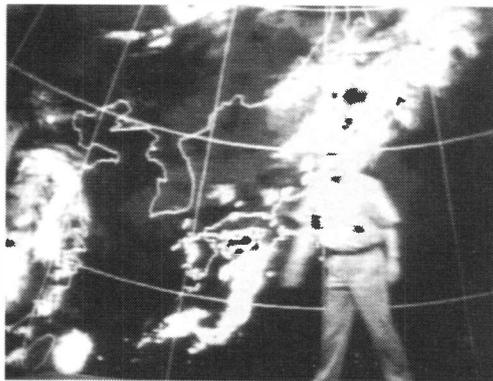


Fig. 6: Japanese weather forecaster, from Peter de Jong. UoSAT 5

JAVIATION

THE VHF/UHF AIRBAND SPECIALISTS

AT LAST!

Our new combined VHF/UHF frequency listing running to some 100 pages is now available. The new publication is in the same format as our previous individual lists and will be updated with the same regularity. Not only have we joined both lists together but added some extra information as well.

VHF/UHF Frequency Listing: £6.50 + £1 p&p

I would like to thank all of you who have, over the years purchased our listings and for the many kind & constructive comments that we have received along with the many snippets of valuable information that you have sent in.

Thanks.



AR2515

Available from stock supplied with FREE IBM PC software.

AR2800

Also available from stock worth giving us a call!

AR2000

In stock, supplied with FREE leather carry case. £259.00

Carlton Works, Carlton Street, BRADFORD, West Yorkshire BD7 1DA
Telephone: (0274) 732146 Facsimile: (0274) 722627

STEPHENS-JAMES LTD.

47 WARRINGTON ROAD, LEIGH, LANCS. WN7 3EA

Telephone (0942) 676790

Turn at the Greyhound Motel on the A580 (East Lancs. Road).

SHOP HOURS

Mon - Fri 9.30-5.00pm

Sat 9.30-4.30pm

24 HOUR MAIL ORDER SERVICE



ANTENNA RANGE

CUSHCRAFT	
A3 3 Element Tribander Beam	£331.00
A4 4 Element Tribander Beam	£408.75
10-3CD 3 Element 10m Monobander	£123.50
15-3CD 3 Element 15m Monobander	£143.00
20-3CD 3 Element 20m Monobander	£244.00
AP8 8 Band Vertical 25ft High	£185.50
AP5 5 Band Vertical 25ft High	£153.26
18 Element 2m Boomer Antenna	£155.94
15 Element 2m Boomer Antenna	£98.70
Ringo Ranger 2m Vertical	£46.57
New R5 5 Band half wave Vertical	£268.84
DW 10, 18, 24MHz Rotary Dipole	£190.00

BUTTERNUT

HF 6VX 6 Band Vertical Antenna	£188.00
HF 2V 80/40 metre Vertical	£143.77
A 1824 HF6V 17/12m Add on kit	£37.64
20MRK HF2V 20m Kit	£34.12

FULL RANGE OF ACCESSORIES FOR THE BUTTERNUT RANGE

HY-GAIN

TH2 Mk3 3 Element Tribander	£254.00
18AVT 5 Band Vertical	£188.00

JAYBEAM

TB3 Mk3 3 Element Tribander	£403.00
TB2 Mk3 2 Element Tribander	£270.25
TB1 Mk3 Rotary Triband Dipole	£136.30
VR3 Mk3 Triband Vertical	£94.00
DB44 & 6m Element Beam	£142.50
4Y/4m 4m 4 Element Beam	£50.00
4Y/6m 6m 4 Element Beam	£66.03
LW5/2m 5 Element 2m	£24.91
LW8/2m 5 Element 2m	£31.96
PBM14/2m Parabeam	£85.00
5XY/2m 5 Element Crossed	£43.50
8XY/2m 8 Element Crossed	£57.00

SCANNING RECEIVERS

WIN 108 Air Band	£178.80
AQR2000 Handheld Scanner	£259.00
AQR900UK	£203.32
Base Station Receiver AR2002	£497.89
NEW HF 225 General Coverage Receiver	£434.24
AOR 300 Base Station	£765.00

KENWOOD RANGE

TS950SD HF Transceiver	£2995.00
TS950S HF Transceiver	£2299.00
SP950 Filtered Speaker	£89.45
SM230 Station Monitor Scope	£789.00
DRU2 Digital Speech Recorder Unit	£88.00
MC60 Deck Microphone	£90.00
AT940 Automatic Antenna Tuner	£250.20
SP940 Speaker with Filters	£89.45
TS850 HF Transceiver	£1399.00
AT850 Auto Tuner	£147.73
PS52 Heavy Duty PSU	£235.00
SP31 Speaker	£64.84
DSP100 Digital Processor	£429.13
TS450S HF Transceiver	£1099.00
TS690S HF Transceiver	£1299.00
PS50 20 Amp Power Supply	£227.33
AT250 Automatic Antenna Tuning Unit	£373.96
AT230 Antenna Tuning Unit	£213.20
SP230 Speaker with filters	£68.90
TL922 HF Linear Amplifier	£1527.50
MC50 Base Station Microphone	£47.08
MC60A De Luxe Desk Microphone	£90.13
TR751E 2m Multimode Mobile Transceiver	£612.02
TR851E 70cm multimode Transceiver	£699.00
TM241E 50watt 2m Transceiver	£295.25
TM441E 35watt 70cm Transceiver	£325.93
TM702E 25watt 2m/70cm Transceiver	£458.76
TH26E 2m FM Handheld	£254.00
TM74E Tri-band VHF/UHF mobile	£729.00
TM531E 23cm Mobile 10/1 watt Transceiver	£415.00
TH7025EDual Baner 25 watt Mobile	£455.00
TH405E 70cm Handheld FM Transceiver	£263.00
R5000 General Coverage Receiver	£894.02
VC20 VHF Converter 108-174MHz	£170.85
R2000 General Coverage Receiver	£607.93
VC10 VHF Converter 118-174MHz	£165.46
HS5 De Luxe Headphones	£38.35
TS790E Dual Bander Transceiver	£1527.50
LF30A Low Pass Filter	£32.96
SP50 Mobile Speaker Unit	£20.86
TH77E Handheld Transceiver	£395.00

Full range of accessories stocked microphones. SWR meter, DC Leads, Antennas etc.

G5RV full size high power	£29.50
G5RV half size high power	£27.00
G5RV full size	£18.90
G5RV half size	£16.35
G5RV 160-10M Antenna	£26.00
Dipole 80-10 kits	£26.00
6m 3 Element Beams	£27.00
50m Enam. Copperwire	£7.50
2m Slim Jim	£10.75
6m 2EI HB9CV Beam	£15.35
D130 Wideband Discone	£80.72
X-300 144/70cm Vertical	£89.00
X-500 144/70cm Vertical	£119.00
CP-22J 2m 2x5/8 Collinear	£49.95

REVEX & DIAWA POWER SUPPLIES

Postage extra at cost. Full range of insulators, clamps: aluminium tubing wall brackets.

MFJ ACCESSORIES RANGE

MFJ 1601 Random Wire Tuner	£45.00
MFJ 1701 6 way Antenna Switch	£40.00
MFJ 949C Versatuner	£171.65
MFJ 948 Versatuner	£123.50
MFJ 986 High Power Tuner	£324.00
MFJ 984B 3kW Tuner	£377.00
MFJ 901B Versatuner	£66.42
MFJ 300 Watt Dummy Load	£34.23
MFJ RF Noise Bridge	£64.47
MFJ-931 Artificial Ground	£81.26

ROTATORS

G400RC	£182.90
G6600RC	£240.11
T2 X Heavy Duty Rotator	£407.67
CDE AR40	£172.39
CD 451 1R	£242.15
EMOTATOR 1057SY	£162.45

We are also stockist for Global, and have a full range of publications by RSGB-ARRL and others. Our secondhand list is updated daily. Please send SAE for this or any information.

A.R.E.

COMMUNICATIONS

OPENING HOURS:
 Mon - Fri: 8.30 - 6 p.m.
 Saturday: 9.30 - 5 p.m.

**6. ROYAL PARADE
 HANGER LANE
 EALING -
 LONDON W5A 1ET
 ENGLAND**

**Tel: 081-9974476
 Fax: 081-9912565**

NOW OPEN SUNDAYS 9 a.m. - 12 UNTIL XMAS

THIS MONTH'S SPECIALS

FOLLOWING 2 METRE UNITS WITH UNIQUE FREE ACCESSORY *

- KENPRO KT-22 - £164!
- ICOM IC-2SE - £269!
- YAESU FT-26 - £245!
- ALINCO DJ-F1E - £239!

* PHONE FOR DETAILS!

OUR ICOM MODIFICATIONS ARE NOW SOLD THRU' ICOM DISTRIBUTORS THROUGHOUT THE WORLD.....



IC-R7100 WITH OUR MODIFICATION THIS RECEIVER IS A WORLD BEATER! £1049

IC R100 ONLY AVAILABLE from A.R.E! with S.S.B. You get the S.S.B. for NOTHING OR 48 MONTHLY PAYMENTS OF £18.37

COFFEE and Homemade CHOC CHIP BISCUITS now being served!



H.P. 2000 No MORE GAPS! 500 KHZ - 1300 MHZ Continuous Coverage

A FEW H.P. 200's LEFT AT LOW LOW PRICE £239-!

£269-259-!

ICOM IC-R100 RECEIVER with S.S.B. Modification ICOM AD 15 POWER SUPPLY DISCONE ANTENNA 65RV HF DIPOLE COMPLETE SYSTEM COVERING 500 KHZ - 1800 MHZ should be £665- COMPLETE PACKAGE £589-!

WE LOVE EXPORT ENQUIRIES!
 FOREIGN STAMP
 Go to A.R.E. Communications England



IC-R1 They said it couldn't be done... NOW AVAILABLE WITH S.S.B!

100 KHZ - £399- / £399-
 1300 MHZ WITH S.S.B. WITHOUT S.S.B.

GET WISE! IF YOU HAVE A UNIT TO PART X-CHANGE YOU CAN'T AFFORD NOT TO CALL US!

H.P. AVAILABLE ALL EASY TERMS ARE BASED ON AN APR OF 34.4% Check out our local competitors - THEY CHARGE MORE!

A.R.E. COMMUNICATIONS EASY PARKING AT REAR

RAYCOM

FOR ALL YOUR AMATEUR RADIO REQUIRMENTS.

021 552 0073

RAMSEY KITS

- AR1K AIRCRAFT RECEIVER.....£24.95
- FR7K 2 METRE RECEIVER£29.95
- FR6K 6 METRE RECEIVER£29.95
- FR10K 10 METRE RECEIVER ..£29.95
- HR20K 20 METRE RECEIVER ..£27.95
- HR30K 30 METRE RECEIVER ..£27.95
- HR40K 40 METRE RECEIVER ..£27.95
- HR80K 80 METRE RECEIVER ..£27.95
- QRP20K 20 METRE CW TX£29.95
- QRP30K 30 METRE CW TX£29.95
- QRP40K 40 METRE CW TX£29.95
- QRP80K 80 METRE CW TX£29.95
- SR1K SHORTWAVE RX£27.95
- AA7K ACTIVE ANT£24.95
- FTR146 2M TX/RX 5W£129.95

ICOM IC7100

The latest base scanning receiver from ICOM is packed with features, 25 - 2000Mhz all mode AF, FM, FMW, SSB.900, memory channels, 5 Scan modes, 10 search banks, AC or DC power, Large LCD display. Plus lots more inc free discone antenna !!!

ONLY £999.00

NOVICES

RAYCOM would like to congratulate all new novice licence holders on getting their new calls. We hope to meet them on the air soon.

NEW for the novice RAMSEY FTR433K 70CMS TRANSCIEVER KIT ONLY £129 Cheap 70cms h.heldsCALL !!!

JUST PASSED THE RAE !!!

RAYCOM now have the cheapest 2 meter handheld on the market fully synthesized, 2.5 / 1 Watt output .This radio comes complete and ready to use inc nicad pack case and charger.

IT MUST BE WORTH AT LOOK !!! £129

RAYCOM COMMUNICATIONS SYSTEMS LIMITED, INTERNATIONAL HOUSE, 963 WOLVERHAMPTON RD, OLDBURY, WEST MIDLANDS B69 4RJ. TEL 021-544-6767, Fax 021-544-7124, Telex 336463 IDENTI G.

RAYCOM
 COMMUNICATIONS SYSTEMS LIMITED



RAYCOM gives you more BUYING POWER

ALL MAJOR CREDIT CARDS ACCEPTED. VISA, ACCESS, DINERS. INSTANT CREDIT (SUBJECT TO STATUS). FREE CREDIT ON CERTAIN ITEMS AT MRP. CALL NOW FOR MORE DETAILS.

ORDERING INFORMATION

WE STOCK ICOM, YAESU, BEARCAT, MFJ, BUTTERNUT, CUSHCRAFT, AEA, TONNA, NAVICO, TEN-TEC AND WELZ AMONG MANY OTHERS. SEND SAE FOR FULL LIST.

TEL: 021-552-0073

PHONE BEFORE 4PM FOR NEXT DAY DELIVERY BY COURIER (£15.00) - OR 2PM FOR DELIVERY BY POST (£10.00 P&P). PLEASE ALLOW TIME FOR CHECKOUTS TO CLEAR. MANY OTHER ITEMS IN STOCK. PLEASE CALL FOR MORE INFO AND FOR EXTRA SPECIAL DEALS!

INFOLINE 0836-771500 5-9pm (weekdays)

OPENING HOURS
 9.30 - 5.30 MON TO SAT . 7.30 DE RAY GAKZH, JOHN G8VIG AND FRED G4HKK.

long medium & short

Brian Oddy G3FEX
Three Corners, Merryfield Way, Storrington, West Sussex RH20 4NS.

Just after SWM arrives on the bookstalls, the time system in the UK will change from British Summer Time (BST) to Greenwich Mean Time (GMT or UTC). At midnight on October 27, all clocks must be turned back one hour, but the one by your radio will not need adjustment if it is already set to UTC.

Long Wave Reports

Note: l.w. & m.w. in kHz; s.w. in MHz; Time in UTC (=GMT). Unless stated, all logs were compiled during the four week period ending September 7.

Signals from Leningrad on 234kHz were logged for the first time by **Eddie McKeown** in Co.Down. He rated the signal as 21321 at 0312. He says, "I was quite stunned to hear this, but it was quite audible against the usual Junglinster background." Eddie has been monitoring 225kHz hoping to hear the new 600kW station in Van, Turkey, so far, the strong co-channel signal from Konstantinow has stopped him.

In Melvick, on the north coast of Scotland, **John Stevens** found he could hear the signals from Kalundborg, Denmark on 243kHz clearly all day. He rated

them SIO333, a contrast to his home in Largs, where signals are marred by sideband splatter from Atlantic 252. The coloured map of European broadcasting stations in *Dial Search** shows the path between Kalundborg and Melvick is mainly over the sea, offering little attenuation to l.w. signals, whereas the path from Clarkestown includes the highlands of Scotland. (*Available from SWM Book Service).

Signals from the BBC Westerglen and Burghead stations (50kW), which share 198kHz with Droitwich (500kW), were heard in Derby by **Roy Patrick** whilst Droitwich was 'off the air' for maintenance on the morning of August 30. The combined signal was S5.

MW Reports

A 10-day DXpedition to Dollar Law, Scotland made a welcome change for **Jim Willett** of Grimsby. The equipment consisted of a giant 5m square loop with differential pre-amp, a CL22 a.t.u. and Lowe HF-235. Electrics were provided by a small Honda generator. The loop was taken in sections and then assembled and erected. It could turn

by hand to any bearing from 250-290°.

Each night, Jim searched the band and logged 16 stations in Canada, 11 in the USA, 5 in the Caribbean and 5 in S.America. The earliest was CJYQ in St.John's, NF on 930 rated SIO333 at 0020. At 0600 ACB 20 in Panama was peaking SIO222. A worthwhile venture.

Some signals from N.Africa have reached the UK after dark. Those noted from Algeria were Ain Beida 531 (600/300kW) by **Darren Beasley** in Bridgewater; Les Trembles 549 (600kW) by **Ron Galliers** in N.London; Ojanet 783 (5kW) 43444 at 2321 by **Leo Barr** in Sunderland; Algiers 891 (600/300kW) SIO222 by **Lee Williams** in Birmingham; Algiers 981 (600/300kW) 54555 at 2239 by **Noel Carrington** in Sutton-in-Ashfield. Also Sidi Bennour, Morocco 640 (600kW); Sebaa-Aioun, Morocco 1044 (300kW) and Tunis-Djedida, Tunisia 630 (600kW).

The signals from Yugoslavia via Zadar on 1134 (1200kW) have attracted attention. Following the announcement 'Croatia Radio' a news bulletin in English was heard at 2100 by Roy Patrick.

In daylight, the signals from BBC Radio Clwyd, Wrexham on 657 have

travelled along ground wave paths to quite distant places! Despite fading and interference, **Phil Townsend** heard them in E.London. They were also heard in N.London. On the loW, **George Millmore** (Wootton) logged them as SIO343.

A weekend in Bournemouth enabled **Robert Lawrence** (Cheltenham) to check the band from a new location. He heard BBC R.Cornwall via Bodmin 675; R.Devon via Exeter 990; R.Jersey 1026; R.Guernsey 1116; also ILR Devon Air R. via Ocombe 954 and several nearby stations. His chart entries were logged at home.

Short Wave Reports

The most distant 25MHz (11m) signals to reach the UK come from R. Australia's Darwin station. Although the solar activity has resulted in daily propagation variations, their signals on 25.750 (Eng to Asia, M.East 0900-1100) have often reached here like a local! The SIO455 by **Simon Hamer** in New Radnor at 1000 says it all. Some days the signal has been weak or even non-existent.

Very potent signals have reached here from the Voice of the UAE in Abu Dhabi on 25.690 most days. The broadcast in Arabic was 55354 at 0712 in Co.Down. Others taking advantage of the conditions in this band include Radio Norway Int, Oslo 25.730, Radio Moscow 25.780 and RFI Paris 25.820.

The 11m broadcasts from HCJB in Quito, Ecuador were discontinued in mid-August. Until then, many listeners enjoyed good reception of their upper sideband (u.s.b.) plus pilot carrier (p.c.) transmissions. Hopefully, they will be reinstated soon, meanwhile try their 13m u.s.b.+p.c. service on 21.455MHz.

Although for other areas, some R. Australia's 21MHz (13m) signals have been heard here in the morning. Those to Asia via Carnarvon 21.775 (Eng 0100-1000) were 35553 at 0655 by **David Edwardson** in Walsand; to C/SE Asia via Darwin 21.525 (Eng 0100-0800) 33233 at 0705 in Co.Down; to SE.Asia, M.East 21.720 (Eng 1100-1330) 33433 at 1100 by **Darran Taplin** in Brenchley.

Also heard in the morning were the BBC via Ascension Is 21.660 (Eng to S.Africa 0900-1745) SIO333 at 0900 by **Bill Clark** in Rotherham; DW via Julich 21.680 (Eng to Australia, N. Zealand 0900-0950) SIO232 at 0950 by **John Sadler** in Bishops Cleeve; R. Afghanistan via USSR? 21.600 (Eng to Asia 0930-1030) 43433 at 1015 in Bridgewater; R.Netherlands via Flevo 21.520 (Eng to

Listeners:

A: Leo Barr, Sunderland
B: Tim Bucknall, Congleton.
C: Noel Carrington, Sutton-in-Ashfield.
D: Tony Elkins, Bury St.Edmunds.
E: David Forester, Newcastle-under-Lyme
F: Ron Galliers, N.London.
G: Francis Hearne, Bristol.
H: Sheila Hughes, Morden.
I: Robert Lawrence, Cheltenham.
J: Eddie McKeown, Co.Down.
K: George Millmore, Wootton, 10W.
L: Sid Morris, Rowley Regis.
M: Phil Townsend, E.London.
N: Ted Walden-Vincent, Gt.Yarmouth.
O: John Wells, East Grinstead.

Local Radio Chart

Freq kHz	Station	ILR BBC	e.m.r.p. (kW)	Listener
558	Spectrum R.	I	7.50	B,E,F,H*,I,K,L,O
585	R.Solway	B	2.00	B,J
603	Invicta Snd(Coast)	I	0.10	C,D,E,F,H,I,K,M,O
603	R.Gloucester	B	0.10	B,G,I,K,L,O
630	R.Bedfordshire	B	0.20	B,C,D,F,H,I,K,L,M,O
630	R.Cornwall	B	2.00	K
657	R.Clywd	B	2.00	B,E,F,I,J,K,L*,M,O
657	R.Cornwall	B	0.50	K
666	Devon Air R.	I	0.34	D,H,I,K,O
666	R.York	B	0.80	B,I*,O
729	BBC Essex	B	0.20	D,F,K,L,M,O
738	Hereford/Worcester	B	0.037	B,C,E,F,I,K,L,M,O
756	R.Cumbria	B	1.00	B,J
756	R.Shropshire	B	0.63	B,F,I,K,L,O
765	BBC Essex	B	0.50	A*,C,D,E,F,L*,M,O
774	R.Kent	B	0.70	D,F,K,M,O
774	R.Leeds	B	0.50	B,C,J*
774	Severn Sound (3CR)	I	0.14	B,G,I,K,L
792	Chiltern R.	I	0.27	C,O,E,F,H,I,K,L,M,O
801	R.Devon	B	2.00	H,J,K,L*,O
819	Hereford/Worcester	B	0.037	E,I,K,L,O
828	Chiltern Radio	I	0.20	D,F,H,I,M,O
828	R.Airef(Magic 828)	I	0.12	B
828	R.WM	B	0.20	B,C,I,L
828	2CR	I	0.27	I,K,O
837	R.Cumbria	B	1.50	B
837	R.Furness	B	1.00	B
837	R.Leicester	B	0.45	B,C,D,E,F,I,K,L,M,N,O
855	R.Devon	B	1.00	K
855	R.Lancashire	B	1.50	B,C,J,L*
855	R.Norfolk	B	1.50	D,F,K,M,O
873	R.Norfolk	B	0.30	C,D,F,J*,K,L,M,O
936	GWR (Brunel R.)	I	0.18	G,I,K,L,O
945	R.Trent (GEM-AM)	I	0.20	B,C*,E,J*,K,L,O
954	Devon Air R.	I	0.32	H,K,O
954	R.Wyvern	I	0.16	C*,I,J*,K,L,O
990	WABC (Nice & Easy)	I	0.09	B,E,I,L
990	R.Devon	B	1.00	H,K,O
999	R.Solent	B	1.00	F,H,I,K,O
999	R.Trent (GEM-AM)	I	0.25	B,C*,I,O
999	Red Rose R.	I	0.80	B,J
1017	WABC Shrewsbury	I	0.70	B,C*,I,K,L,O
1026	R.Cambridgeshire	B	0.50	B,D,E,F,I,M,O
1026	R.Jersey	B	1.00	K,O
1035	R.Kent	B	0.50	D,F,K,M,O
1035	R.Sheffield	B	1.00	B,C
1035	West Sound	I	0.32	J
1107	R.Northampton	B	0.50	E,F,I,J,K,L*,O
1116	R.Derby	B	1.20	B,C,I,J*,L,O
1116	R.Guernsey	B	0.50	K,O
1152	BRMB (Xtra-AM)	I	3.00	C,E,I,J*,L
1152	LBC (L.Talkback R)	I	23.50	H*,K,O
1152	Piccadilly R.	I	1.50	B
1152	R.Broadland	I	0.83	O,J*,O
1161	GWR (Brunel R.)	I	0.16	G,I,K,L
1161	R.Bedfordshire	B	0.10	D,O
1161	R.Sussex	B	1.00	H,K,O
1161	R.Tay	I	1.40	J*
1170	Ocean Sd.(SCR)	I	0.12	K,O

Freq kHz	Station	ILR BBC	e.m.r.p. (kW)	Listener
1170	R.Orwell	I	0.28	D,O
1170	Signal R.	I	0.20	B,C,E,I,L
1170	Swansea Sound	I	0.58	I
1242	Invicta Snd(Coast)	I	0.32	C,F,H,L,M,O
1242	Isle of Wight R.	I	0.50	K,L*
1251	Saxon R.	I	0.76	F,J*,M,O
1260	GWR (Brunel R.)	I	1.60	I,J*,K,O
1260	Leicester (GEM-AM)	I	0.29	E,L,M
1260	Marcher Sound	I	0.64	B,J*
1278	Pennine R.(C.Gold)	I	0.43	B,C
1305	R.Hallam (C.Gold)	I	0.15	B,C
1305	Red Dragon (Touch)	I	0.20	E,G,I,J*,K,L*
1323	R.Bristol (Som.Snd)	B	0.63	G,I,J*,L*,O
1323	S'thern Sound(SCR)	I	0.50	F,K,M,O
1332	Hereward R.P'boro	I	0.60	J*,L,M,N,O
1332	Wiltshire Sound	B	0.30	I,J*,K,O
1359	Essex R.(Breeze)	I	0.28	F,H,M,O
1359	Mercia Snd(Xtra-AM)	I	0.27	B,E,I,J*,L,O
1359	Red Dragon (Touch)	I	0.20	G,J*
1359	R.Solent	B	0.85	J*,K
1368	R.Lincolnshire	B	2.00	B,J*
1368	R.Sussex	B	0.50	E,F,H,K,M,O
1368	Wiltshire Sound	B	0.10	I,K,L*
1413	Sunrise R.	I	0.125	H*,K,M,O
1431	Essex R.(Breeze)	I	0.35	C*,F,H,J*,M,O
1431	Radio 210	I	0.14	I,K,O
1449	R.Peterboro/Cambs	B	0.15	I,K,O
1458	GLR	B	50.00	K,O
1458	GMR	B	5.00	B,E,J*
1458	R.Cumbria	B	0.50	J
1458	R.Devon	B	2.00	K,O
1458	Radio WM	B	5.00	B,C*,G,I,L
1476	C'ty Snd(1st Gold)	I	0.50	F,I,J*,K,O
1485	R.Merseyside	B	1.20	B,E,J,L
1485	R.Oxford	B	0.50	C,I,K,O
1485	R.Sussex	B	1.00	F,H,K,O
1503	R.Stoke-on-Trent	B	1.00	B,C*,F,H*,J*,K,L,O
1521	R.Mercury	I	0.64	E,F,H*,K,M,O
1521	R.Nottingham	B	0.50	B,C,J*,L
1530	Pennine R.(C.Gold)	I	0.74	B,C,J*
1530	R.Essex	B	0.15	F,K,M
1530	R.Wyvern	I	0.52	I,J*,K,L
1548	Capital R. (Gold)	I	97.50	H*,K,O
1548	R.Bristol	B	5.00	I,J*,K
1548	R.City (City Talk)	I	4.40	B
1548	R.Forth (Max AM)	I	2.20	I
1548	R.Hallam (C.Gold)	I	0.74	B,C,J*,J*
1557	Chiltern R.(Gold)	I	0.76	C,D,I
1557	Ocean Sound (SCR)	I	0.50	E,K
1557	R.Lancashire	B	0.25	B,J*
1584	Gatwick	I	0.10	H*,K,M,O
1584	Heathrow	I	0.10	H*,M,O
1584	R.Nottingham	B	1.00	B,C*,J*
1584	R.Shropshire	B	0.50	B,E,I,L
1602	R.Kent	B	0.25	C*,F,J*,K,M,O

Note: Entries marked * were logged during darkness. All other entries were logged during daylight or at dawn/dusk.

long medium & short

Long Wave Chart

Freq kHz	Station	Country	Power (KW)	Listener
153	Bechar	Algeria	1000	J*
153	Donebach	Germany	500	A,B,C*,D,E,G*,H,J,M
153	Brasov	Romania	1200	G*
153	Engels	USSR	150	B*
162	Allouis	France	2000	A,B,C*,E,G,H,I*,J,M,N
171	Kaliningrad	Lithuania	1000	A,C*,G,H,J
177	Oranienburg	Germany	750	A,B*,D,E,G*,H,J
183	Saarlouis	Germany	2000	A,B,C*,E,F,G,H,I,J,N*
189	Motala	Sweden	300	A
198	BBC Burghead	UK	50	K
198	BBC Droitwich	UK	500	B,C*,E,F,G,H,I,M
198	BBC Westerglen	UK	50	A,K
207	Munich	Germany	500	A,B,C*,E,F,G*,H,I*,J
216	Roumoules	Monaco	1400	A,B,C*,E,F,G*,H,I*,J,N*
216	Oslo	Norway	200	A,G*
225	Konstantinow	Poland	2000	A,E,F*,G*,H,I*,J
234	Junglinster	Luxembourg	2000	A,B,C*,E,F,G,H,I,J,M,N*
234	Leningrad	USSR	1000	G*
243	Kalundborg	Denmark	300	A,B,C*,E,F,H,I*,J,L,M
252	Tipaza	Algeria	1500	B*,F*,N*
252	Atlantic 252	S.Ireland	500	A,B,C*,E,F*,G,H,I,L,M,N*
261	Burg	Germany	200	E,H,N*
261	Moscow	USSR	2000	A,B,F*,I*
270	Topolna	Czech.	1500	A,C*,E,F*,G*,H,I*
279	Minsk	USSR	500	A,B*,E,G*

Note: Entries marked * were logged during darkness. All other entries were logged during daylight or at dawn/dusk.

S.Asia 1130-1225) SIO333 at 1200 by **Cyril Kellam** in Sheffield.

Later, R.Austria Int, Moosbrunn 21.490 (Ger, Sp, Eng, Fr to W.Africa, S.Europe 1300-1700) was SIO444 at 1325 by **John Coulter** in Winchester; R.Finland via Pori 21.550 (Eng to USA 1330-1345) 32432 at 1340 by **John Nash** in Brighton; RFI via Issoudun 21.770 (Eng, Fr to S.E.Asia 1400-1600) 45454 at 1442 by **Jim Cash** in Swanwick; R.Moscow 21.820 (Rus to S.Asia 0600-1530) SIO555 at 1458 by **Philip Rambaut** in Macclesfield; WHRI Noblesville 21.840 (Eng 1500-1700 Sat/Sun only, also to E.USA) SIO544 at 1520 by **Bryan Kimber** in Hereford; BRT via Wavre 21.815 (Eng to Africa 1730-1755) 34333 at 1730 by **Rhoderick Illman** in Thumrait, Oman; WCSN Scotts Corner 21.545 (Eng to S.Africa 1800-2000) SIO444 at 1930 in E.London.

Among the 13m signals to Europe logged were R.Japan via Moyabi 21.575 (Eng 0700-0800) 33333 at 0700 by **Sheila Hughes** in Morden; UAE R.Dubai 21.605 (Eng 1330-1400) SIO555 at 1330 by **Kenneth Buck** in Edinburgh; RCI via Sackville 21.545 (Eng, Fr 1400-1530) heard at 1400 by **Don Phillips** in Bridlington; HCJB Quito 21.455 (u.s.b. + p.c.) 24444 at 1900 by **John Robertson** in Alnwick, also 21.480 (Cz, Eng, Ger, Sw, Sp 1800-2230) 44444 at 2200 by **Antonio De Abreu-Teixeira** in Durham; WYFR 21.500 (Eng, Ger, Fr 1700-2000) 45554 at 2000 by **John Parry** in Northwich and 21.615 (Ger, It, Eng 1700-2000) 22232 at 2000 by **Robin Harvey** in Bourne; VOFC via Okeechobee 21.720 (Eng 2200-2300) 54444 at 2220 by **Chris Shorten** in Norwich.

Some days, good 17MHz (16m) DX reception was noted. R. New Zealand's 100kW signals from Rangataiki, N.Island on 17.770 (Eng to Pacific 2200-0630) was SIO333 at 2300 in New Radnor. One morning it peaked 54444 in Norwich! Some R. Australia signals were also clearly heard here. The signal to Pacific areas via Shepparton 17.715 (Eng 2200-0530) was heard at 2300 by **Sid Morris** in Rowley Regis; to E/SE.Asia via Carnarvon 17.630 (Eng, Chin 0000-0900) 35444 at 0025 in Swanwick. The Shepparton signals to Pacific areas 17.795 (Eng, Fr 0600-0800) was 32333 at 0625 in N.London; to Asia via Darwin 17.750 (Fr, Eng 0600-0800) as 43443 at 0737 in Bridgwater.

Many broadcasts for outside Europe are in English, but those in other

DXers:

- A: Leo Barr, Sunderland.
- B: Darren Beasley, Bridgwater.
- C: Noel Carrington, Sutton in Ashfield.
- D: Jim Cash, Swanwick.
- E: Bill Clark, Rotherham.
- F: Antonio De Abreu-Teixeira, Durham.
- G: David Edmondson, Wallsend.
- H: Ron Galliers, N.London.
- I: Sheila Hughes, Morden.
- J: Bryan Kimber, Hereford.
- K: Eddie McKeown, Co.Down.
- L: Sid Morris, Rowley Regis.
- M: Sergei Olejnik, Ukraine.
- N: Fred Pallant, Storrington.
- O: Don Phillips, Bridlington.
- P: John Robertson, Alnwick.
- Q: Chris Shorten, Norwich.
- R: Darran Taplin, Brencley.
- S: Phil Townsend, E.London.
- T: Ted Walden-Vincent, Gt.Yarmouth.
- U: Jim Willett, Dollar Law.

Listeners:

- A: Kenneth Buck, Edinburgh.
- B: Tim Bucknall, Congleton.
- C: Noel Carrington, Sutton in Ashfield.
- D: Tony Elkins, Bury St.Edmunds.
- E: Ron Galliers, N.London.
- F: Sheila Hughes, Morden.
- G: Eddie McKeown, Co.Down.
- H: George Millmore, Wootton, IOW.
- I: Sid Morris, Rowley Regis.
- J: Fred Pallant, Storrington.
- K: Roy Patrick, Derby.
- L: John Stevens, Melvick, N.Scotland.
- M: Ted Walden-Vincent, Gt.Yarmouth.
- N: Lee Williams, Birmingham.

Tropical Bands Chart

Freq MHz	Station	Country	UTC	DXer	Freq MHz	Station	Country	UTC	DXer
2.340	Fuzhou	China	2130	U	4.835	R.Tezulutan, Coban	Guatemala	0300	G
2.445	Nanchang	China	2212	U	4.835	RTM Bamako	Mali	2100	H,K,N,O
2.470	R.Cacique	Brazil	0216	U	4.845	R.Cabocla, Manaus	Brazil	0114	U
2.495	R.Madagascar	Madagascar	2030	U	4.845	RRI Ambon	Indonesia	0620	U
2.560	Xinjiang	China	2000	G,O	4.845	ORTM Nouakchott	Mauritania	2143	F,K
3.205	AIR Lucknow	India	2047	U	4.850	R.Yaounde	Cameroon	2100	G,H,I,J,K,N,O,R
3.215	R.Orange	S.Africa	2040	B	4.855	R.Sana Yemem	Yemen	2420	U
3.220	R.Togo, Lome	Togo	2135	U	4.860	EP da Lunda-Sul	Angola	1916	U
3.225	RRI Tanjung Pinang	Indonesia	2239	G	4.860	AIR New Delhi	India	1700	O
3.250	RRI Banjarmasin	Indonesia	2030	U	4.865	PBS Lanzhou	China	2057	G,N
3.255	BBC via Maseru	Lesotho	2105	B	4.870	R.Cotonou	Benin	2055	A,H,O
3.270	AIR Kohina	India	1440	T	4.870	SLBC Colombo	Sri Lanka	0010	M
3.270	SWABC 1, Namibia	S.W.Africa	2030	O,U	4.875	Super R.Roraima	Brazil	0041	F
3.295	Reykjavik	Iceland	2220	G,O	4.880	AIR Lucknow	India	2024	U
3.315	SLBS Freetown	Sierra Leone	2200	B,M,D	4.885	R.Clube do Para	Brazil	2200	F,G
3.320	R.Orion	S.Africa	2045	A,B,M,U	4.885	Voice of Kenya	Kenya	1855	N
3.325	R.Liberal	Brazil	2100	U	4.890	RFI Paris	via Gabon	0020	M,O
3.325	FRCN Lagos	Nigeria	2145	B,G,H,K	4.890	R.Port Moresby	New Guinea	0612	U
3.330	R.Kigali	Rwanda	2100	U	4.890	DRTS Dakar	Senegal	2300	H
3.355	Noumea	New Caledonia	0620	U	4.895	Voz del Rio Arauca	Colombia	0050	F
3.365	R.Rebelde, La Julia	Cuba	0142	U	4.895	AIR Kurseong	India	0010	U
3.365	GBC Radio 2	Ghana	2130	A,B,G,H,J,K,O	4.895	R.Moscow (Kalinin)	Lithuania	2050	H,K,N
3.370	R.Tezulutan	Guatemala	0300	G	4.895	R.Moskva 4 (Tyumen)	Siberia	2230	O
3.915	BBC Kranji	Singapore	2019	K,S,U	4.900	V. of the Strait 2	China	1630	M
3.925	NSB Tokyo	Japan	0520	U	4.900	V de la Rev.Conakry	Guinea	2200	G
3.955	BBC Daventry	England	1945	H,I,J,K,L,O,S	4.900	SLBC Colombo	Sri Lanka	0619	U
3.965	RFI Paris	France	2045	H,I,J,K,O,S	4.905	R.Regio, Rio	Brazil	2316	F
3.970	RFE Munich	W.Germany	2315	J	4.905	R.Nat.N'djamena	Chad	1857	H,I,N,U
3.980	VOA Munich	W.Germany	1820	C,H,I,J,K,L,O,S	4.910	R.Zambia, Lusaka	Zambia	2000	U
3.985	R.Beijing, China	via SRI Berne	2115	J,K,O,Q	4.915	R.Anhanguera	Brazil	2330	G,M
3.985	SRI Berne	Switz	2005	H,I,L,S	4.915	R.Ghana, Accra	Ghana	2000	B,E,G,H,I,N,O
3.995	DW Cologne (Julich)	W.Germany	2121	C,H,J,K,L,O	4.915	Voice of Kenya	Kenya	1832	N,U
4.000	Bofoussam	Cameroon	1900	U	4.920	R.Quito	Ecuador	0139	U
4.040	R.Yerevan 1	USSR	2230	O	4.925	R.Nacional, Bata	Eq.Guinea	2200	U
4.055	R.Moskva 1 (Kalinin)	USSR	1930	O	4.930	R.Moscow	USSR	2156	C,K
4.220	PBS Xinjiang	China	2200	C,O	4.935	Voice of Kenya	Kenya	1832	A,B,H,N,O,P,R
4.500	Xinjiang	China	2215	G,J,O	4.940	V of Strait, Fuzhou	China	0220	U
4.600	R.Baghdad	Iraq	2000	G,O	4.940	R.Kiev 2	Ukraine	2100	C,G,H,I,K,N,O
4.635	R.Dushanbe Tadzikh	USSR	0015	M	4.945	R.Nac.Porto Velho	Brazil	0120	U
4.719	RRI Ujung Padang	Indonesia	0612	U	4.958	R.Baku	USSR	2000	F,O
4.725	BBS Rangoon	Burma	0710	U	4.970	R.Rumbos, Caracas	Venezuela	0100	U
4.735	Xinjiang	China	2200	A,D,G,H,K,O	4.975	R.Uganda, Kampala	Uganda	1900	M,D,R
4.755	RRI Ujungpadang	Indonesia	2130	O	4.980	Ecos del Torbes	Venezuela	2318	K,U
4.760	Yunnan Kuming	China	2200	O	4.990	FRCN Lagos	Nigeria	2300	E,K,O
4.765	R.Rural, Santarem	Brazil	2345	F	4.990	R.Ancash, Huaraz	Peru	0215	U
4.765	Brazzaville	Pep.Rep Congo	2100	A,C,D,G,H,I,J,K,N,O,S,U	4.990	R.Moscow (Yerevan)	USSR	0017	K
4.770	FRCN Kaduna	Nigeria	2055	B,G,H,I,K,N,O,R,U	5.000	YVTO Caracas	Venezuela	0200	U
4.785	Caiari Porto Velho	Brazil	0240	U	5.005	R.Nacional, Bata	Eq.Guinea	2010	U
4.785	RTM Bamako	Mali	2300	H,M	5.010	R.Garoua	Cameroon	1835	N
4.785	R.Baku	USSR	1828	N	5.010	R.Malagasy	Madagascar	2110	U
4.790	TWR Manzini	Swaziland	1800	N,O	5.010	SBC Singapore	Singapore	0516	U
4.795	R.Nueva America	Bolivia	0300	U	5.020	R.Nacional,Caracas	Venezuela	0147	U
4.795	R.Douala	Cameroon	1853	H,J,N,O	5.030	R.Catolica, Quito	Ecuador	2030	O,U
4.800	PBS Xinjiang	China	2204	G	5.035	R.Bangui	C.Africa	2055	G,H
4.800	AIR Hyderabad	India	0030	M	5.035	R.Alma Ata	USSR	2130	K,O
4.800	LNBS Lesotho	Maseru	1820	N,U	5.040	Vos del Upano, Macas	Ecuador	0110	F,U
4.805	R.Nac.Amazonas	Brazil	2250	F,H	5.045	R.Cultura do Para	Brazil	2210	F,G,K,M
4.810	R.Orion, Jo'burg	S.Africa	2000	U	5.047	R.Togo, Lome	Togo	1850	H,K,N,O
4.810	R.Yerevan 2	USSR	2230	H,K,O	5.050	AIR Aizawal	India	2005	U
4.815	R.diff TV Burkina	Ouagadougou	1917	K,U	5.050	SBC Singapore	Singapore	2215	G,H,O
4.820	R.Moskva 4 (Khanty-M)	USSR	1855	F,K,N	5.055	RFO Cayenne(Matoury)	Fr. Guiana	0435	I,K
4.825	R.Moscow	USSR	1855	K,N,O	5.055	TWR Manzini	Swaziland	0330	F,O
4.830	Gaborone	Botswana	2152	C,H	5.060	PBS Xinjiang	China	2200	G,O
4.830	R.Bangkok	Thailand	0520	U	5.075	Caracol Bogata	Colombia	2140	F,U
4.830	R.Tachira	Venezuela	2300	F,G,H	5.260	R.Alma Ata 2	USSR	2200	B,K,O
4.832	R.Reloj	Costa Rica	0400	O	5.290	R.Moskva 1Krasnoy'k	USSR	0310	U
4.832	Altai	Mongolia	2205	U	5.800	PBS Xinjiang	China	2335	I
4.835	ABC-Alice Springs	Australia	0518	U					

long medium & short

Medium Wave Chart

Freq kHz	Station	Country	Power (kW)	Listener
531	Ain Beida	Algeria	600	B*,H*
531	Leipzig	Germany	100	B*,C*,N*,D
531	Oviedo	Spain	10	B*,N*,O
531	Beromunster	Switz	500	T,W*
531	Cheboksary	USSR	30	C*
540	BRT-2 Wavre	Belgium	150/50	B*,C,D,H,N*,O,P*,U
540	Solt	Hungary	2000	N*
540	Sidi Bennour	Morocco	600	B*,H*
549	Les Trembles	Algeria	600	B*,H*,D
549	DLF Bayreuth	Germany	200	B*,D,G,H,N*,O,U
549	Nordkirchen	Germany	100	P*
549	Thurau	Germany	200	G
549	Moscow	USSR	100	C*,T*
558	Espoo	Finland	100	B*
558	Valencia	Spain	20	B*,D,N*,W
567	Berlin	Germany	100	B*,H*,N*
567	RTE-1 Tullamore	Ireland (S)	500	B*,C,O,D,P,U,V,W*
567	Volgograd	USSR	250	N*
576	Muhlacker	Germany	500	H
576	Stuttgart	Germany	500	B*,N*,D
585	FIP Paris	France	8	G,H,O,U
585	RNE-1 Madrid	Spain	200	B*,N*,P*,W*
594	Frankfurt	Germany	400	B*,G,H*,N*,O,U
594	Muge	Portugal	100	B*
594	Izhevsk	USSR	100	C*
594	Zagreb	Yugoslavia	20	G*
603	Lyon	France	300	B*,C*,D
603	BBC-R4 N'castle	UK	2	C,O,N
612	Kiel	Germany	10	G
612	RTE-2 Athlone	Ireland (S)	100	B*,C,O,D,P,U,V,W*
612	Tallinn	USSR	100	C*
621	RTBF-1 Wavre	Belgium	80	B*,D,H,N*,O,P*,U
630	Vigra	Norway	100	B*,N*
630	Tunis-Djedeida	Tunisia	600	H*
639	Liblice	Czech	1500	B*,H*
639	La Coruna	Spain	100	B*,N*,P,W*
648	BBC Orfordness	UK	500	C,D,H,N*,O,P,U,V
657	Burg	Germany	250	B*,N*
657	RCE-2 Madrid	Spain	20	H*
657	BBC-R.Wales Wrexham	UK	2	B*,D,M,P*
666	Bodenseesender	Germany	300/180	B*,C*,G*,N*
666	Barcelona	Spain	20	N*
675	Marseille	France	600	B*,H*,P
675	Hilversum-3 Lopic	Holland	120	B*,C,D,G,H,N*,O,U,V
684	RNE-1 Sevilla	Spain	250	B*,H*,N*
693	Berlin	Germany	250	N*
702	Aachen/Flensburg	Germany	5	B*,N*
702	Zamora	Spain	5	B*,K*
711	Tallinn	Estonia	50	C*
711	Rennes 1	France	300	B*,H,K,N*,O,U
720	Langenberg	Germany	200	B*
720	BBC-R4 Lisnagarvey	Ireland (N)	10	C
720	Norte	Portugal	100	N*
720	BBC-R4 Lots Rd London	UK	0.5	B*,C,D,M,O
729	Leipzig	Germany	5	C*
729	RTE-1 Cork	Ireland (S)	10	A*,B*,D,N*,O
729	Oviedo	Spain	50	B*,K*,N*
738	Paris	France	4	A*,O,V
738	Poznan	Poland	300	B*
738	RNE-1 Barcelona	Spain	250	A*,B*,K*,N*,W*
747	Hilversum-2 Flevo	Holland	400	B*,D,G,H,K, N*,D,P,U,V
756	Brunswick	Germany	800/200	B*,G*,H,K*,N*
756	Ravensburg	Germany	100	G*
756	Bilbao	Spain	5	K*
756	BBC-R4 Redruth	UK	2	D,O
765	Sottens	Switz	500	B*,N*
774	BBC-R4 Enniskillen	Ireland (N)	1	N
774	RNE-1 San Sebastian	Spain	60	B*
783	Djanet	Algeria	5	A*
783	Burg	Germany	1000	B,K*,N*
792	Limoges	France	300	B*,N*,D
792	Sevilla	Spain	20	B*,K*
792	Al-Hiswah	Yemen	750	L
801	Munich	Germany	420	B*,H*,N*
810	Berlin	Germany	5	G*
810	SER Madrid	Spain	20	B*,G*,N*
810	BBC-Scot.Westerglen	UK	100	C,N,D,P
819	Bordeaux	France	20	B*
828	Hanover	Germany	1000/5	B*
837	Nancy	France	200	B*,N*,D
846	Rome	Italy	540	B*,H*,N*,O,P*
846	Moscow	USSR	50	C*
855	Berlin	Germany	100	A*,B*,N*
855	Murcia	Spain	125	B*,O,N*
864	Paris	France	300	B*,O,U
873	AFN via Frankfurt	Germany	150	B*,E*,G,N*,P*,W*
873	R.Ulster,Enniskillen	UK	1	C,N
882	BBC-Wales Washford	UK	70	B*,C,D,G,H,J,M,N,O,P
891	Algiers	Algeria	600/300	B*,C*,H*,N*,P,W*
891	Hulsberg	Holland	20	B*,G,N*,D
900	Milan	Italy	600	A*,B*,C*,H,N*,W*
909	BBC-R5 Moorside Edge	UK	200	D
918	R.Intercont. Madrid	Spain	20	B*,N*
927	BRT-1 Wolveterm	Belgium	300	B*,D,H,N*,O,P*,U
936	Bremen	Germany	100	B*,C*,G*,N*,W*
945	Toulouse	France	300	B*,N*

Note: Entries marked * were logged during darkness. All other entries were logged during daylight or at dawn/dusk.

languages can often be identified by the preceding brief musical signature. Those noted came from Vatican R, Rome 17.630 (Eng to Africa 0630-0700) 44444 at 0630 in Morden; KHBI, N. Mariana Is 17.555 (Eng to Asia 0800-1000) SIO223 at 0820 in Macclesfield; R.Beijing, China 17.710 (Eng to S.Pacific 0900-1100) heard at 0900 in Bridlington; DW via Julich 17.780 (Eng to Australia, N. Zealand 0900-0950) SIO444 at 0924 in Rotherham and 17.830 (Ger to W.Africa 2000-2200) 43333 at 2000 in Bourne; SRI via Schwarzenburg 17.670 (It, Eng, Ger, Fr to Pacific 0800-1030) SIO222 at 1015 by Francis Hearne in Bristol, 17.830 (Eng to M.East, Africa 1530-1600) 53354 at 1532 in Co.Down and 44444 at 1549 in Oman; R.Tunis via Sfax 17.500 (Ar 0700?-1600) SIO444 at 1420 in Winchester; RSA Johannesburg 17.790 (Eng to W.Africa 1700-1800) 44554 at 1700 in Alnwick; WWCR 17.525 (Eng to USA 1500-2000) heard at 1900 in Derby; V. of Israel, Jerusalem 17.630 (Eng to Africa 1900-1930) SIO455 at 1905 in Edinburgh; BRT 17.550 (Eng to Africa 2100-2125) 53333 at 2103 by Charles Beanland in Gibraltar.

A few evening broadcasts to Europe were logged: RHC, Cuba 17.815 (Fr, Eng 1900-2100) SIO433 at 2030 in Hereford; HCJB Quito 17.790 (Cz, Ger, Sw, Eng, Sp 1800-2230) 33344 at 2132 by Chris Bazley in Rayleigh; VOFC via Okeechobee 17.750 (Eng to Europe 2200-2300) SIO444 at 2200 in Sheffield; V. of the UAE in Abu Dhabi 17.855 (Eng 2200-0000) 45554 at 2340 in Wallsend.

R. New Zealand Int. has returned to the 15MHz (19m) band to reach the Pacific areas, because many of their receivers do not cover the 22m band. They now operate on 15.120 (Eng to Pacific 1800-2200). Some evenings they were heard here. In New Radnor they were SIO333 at 1900. Some of R. Australia's Shepparton signals have also been heard here: 15.240 (Eng to Pacific areas 2200-0930) heard at 2200 by Tim Bucknall in Congleton; 15.320 (Eng to Asia 2030-0800) 34433 at 0615 in Wallsend; 15.160 (Eng to Pacific 2130-1100) as 42222 at 2131 in Swanwick.

Most 19m signals to Europe reach their target well. A typical rating for R.Japan via Yamata 15.325 (Eng 0700-0800) was SIO433 at 0730 in Hereford; UAE R.Dubai 15.435 (Eng 1330-1400)

Listener:

- A: Leo Barr, Sunderland.
- B: Darren Beasley, Bridgwater.
- C: Tim Bucknall, Congleton.
- D: Noel Carrington, Sutton in Ashfield.
- E: Jim Cash, Swanwick.
- F: Bill Clark, Rotherham.
- G: Tony Elkins, Bury St.Edmunds.
- H: Ron Galliers, N.London.
- I: Alf Gray, Birmingham.
- J: Francis Hearne, Bristol.
- K: Sheila Hughes, Morden.
- L: Roderick Illman, Thumrait, Oman.
- M: Robert Lawrence, Cheltenham.
- N: Eddie McKeown, Co.Down.
- O: George Millmore, Wootton IDW.
- P: Sid Morris, Rowley Regis.
- Q: John Parry, Northwich.
- R: Roy Patrick, Derby.
- S: John Robertson, Alnwick.
- T: John Stevens, Melwick, N.Scotland.
- U: Phil Townsend, E.London.
- V: Ted Walden-Vincent, Gt.Yarmouth.
- W: Lee Williams, Birmingham.

long medium & short

SIO444 at 1330 in Edinburgh; Voice of Israel, Jerusalem 15.617 (Heb 0400-2310, to USA) SIO444 at 1335 in Winchester and 15.640 (Heb, Fr, Russ, Eng, Yid 1800-2225) SIO333 at 1925 by **Alf Gray** in Birmingham; RNB, Brazil 15.265 (Eng, Ger 1800-?) 32432 at 1950 in Alnwick; VOA via Tangier 15.205 (Eng 1700-2200) 43333 at 1915 in Morden; WWCR Nashville 15.690 (Eng, Sp 1200-0000) at 1920 in Derby; RCI via Sackville 15.325 (Eng 1900-1959) at 1900 in Bridlington; Voice of Vietnam, Hanoi 15.010 (Eng, Fr, Sp, Ger 1800-2130) 44444 at 1942 in Sunderland; R.Denmark via RNI Oslo 15.235 (Da 1930-2000) 53553 at 1942 in Bridgewater; SLBC Colombo, Sri Lanka 15.120 (Eng 1830-2130) SIO433 at 2030 in Sheffield; R.Beijing, China 15.100 (Fr 1830-2130, also to Africa) 54444 at 2051 in Gibraltar; R.Korea, Seoul 15.575 (Eng 2030-2130) SIO232 at 2110 in Bishops Stortford; WCSN Scotts Corner 15.665 (Eng 2000-2200) 43333 at 2118 in N.London; Voice of the UAE in Abu Dhabi 15.305 (Eng 2200-0000) 55555 at 2225 in Norwich; RTVM Tanger, Morocco 15.335 (Ar, Sp 0945-0100, also to W.Africa) 43333 at 2330 in Durham.

Those to other areas include RTL Luxembourg 15.350 (Eng, Fr to E.USA 24hrs) 34333 at 0530 in Oman; R.Romania Int, Bucharest 15.335 (Eng to Pacific areas 0645-0715) SIO322 at 0715 in Bristol; SRI via Schwarzenburg 15.570 (Eng, Fr, Ger, It to Pacific, Asia 1100-1300) 43343 at 1105 in Co.Down; R.Tashkent, Uzbek 15.470 (Eng to S.Asia 1330-1400) 45333 at 1330 in Brighton; R.Portugal Int, Lisbon 15.425 (Eng to M. East, India 1600-1630) SIO444 at 1630 in Macclesfield; R.Netherlands via Talata Volon 15.570 (Eng to C/S.Africa 1830-1925) SIO434 at 1846 in Rotherham; AIR via Bangalore 15.265 (Eng to Pacific 2045-2230) 34433 at 2105 in Brenchley; BBC via Ascension Is 15.260 (Eng to S. Am 2000-0330) 33323 at 2220 in Bourne; R. Korea, Seoul 15.575 (Eng to E.USA 0000-0100) at 0000 in Rowley Regis.

Although for other areas, R. Australia's **13MHz (22m)** signals often reach the UK. The Shepparton signals to Pacific areas 13.605 (Eng 1700-2130) were SIO433 at 1700 in Birmingham; to S.Asia via Carnarvon 13.775 (Eng 1530-2100) was 52333 at 1820 in Swanwick.

Some broadcasts in this band come from DW via Julich 13.790 (Eng to W.Africa 0600-0650) 33233 at 0645 in N.London; WSHB Cypress Creek 13.760 (Eng to Australia 0800-1000) SIO111 at 0808 in Macclesfield; SRI via Sottens 13.635 (Eng, Fr, Ger, It to Pacific areas, Asia 1100-1430) 44344 at 1106 in Co.Down; R.Austria Int, Moosbrunn 13.730 (Fr, Eng, Sp, Ar to Europe 0400-1655) SIO233 at 1405 in E.London and 13.730 (Ger, Fr, Eng, Sp to Africa 1700-2100) 44344 at 1945 in Bourne; R.Pakistan, Islamabad 13.665 (Eng to M. East 1600-1630) at 1600 in Bridlington; UAE R.Dubai 13.675 (Eng to Europe 1600-1640) 23442 at 1632 in Wallsend; KHBI Saipan, N.Mariana Is 13.625 (Eng to S.Asia 1400-1800) SIO322 at 1640 in Rotherham; BRT via Wavre 13.675 (Eng to Europe 1730-1755) 42322 at 1732 in Oman; RCI via Sackville 13.670

(Eng, Fr to Africa 1800-2000) 11431 at 1810 in Bridgewater; BBC via Woofferton 13.660 (Ar to N.Africa 2000-2100) 54444 at 2042 in Gibraltar; WHRI 13.760 (Eng to USA, Europe 1600-0000) SIO444 at 2200 in Edinburgh; Voice of the UAE, Abu Dhabi 13.605 (Ar, Eng to N.Africa 2200-0000) 34343 at 2315 in Rayleigh.

The **11MHz (25m)** signals to Europe include HCJB Quito 11.835 (Eng 0700-0830) 44444 at 0735 in Alnwick; WCSN Scotts Corner 11.705 (Eng 0800-1000) 33333 at 0813 in Rayleigh; UAE R.Dubai 11.795 (Eng 1600-1640) 33423 at 1635 in Sunderland; R.Pakistan, Islamabad 11.570 (Ur, Eng 1700-1800) SIO444 at 1740 in Macclesfield; R.Finland via Pori 11.755 (Eng 1830-1900) in Bridlington; REE via Aganda 11.790 (Eng 1900-2000) SIO322 at 1900 in Birmingham; R.Damascus, Syria 12.085 (Eng 2005-2105, to USA) SIO332 at 2028 in Rotherham; R.Romania Int, Bucharest 11.940 (Eng 2100-2125) 55555 at 2100 in Brenchley; R.Yugoslavia, Belgrade 11.735 (Eng 2100-2145) 53233 at 2110 in Bishops Stortford; R.Beijing, China 11.500 (Eng 2000-2200) 34343 at 2146 in Swanwick; AIR via Aligarh 11.620 (Hi, Eng 1845-2230) SIO444 at 2200 in Sheffield; R.Sofia, Bulgaria 11.660 (Eng 2200-2230) heard by **Peter Vieltinck** in Royston; Voice of Turkey, Ankara 11.710 (Eng 2200) heard at 2200 in Hereford; R.Japan via Moyabi 11.735 (Eng 2300-0000), at 2300 by **Julian Wood** in Elgin; R.Vilnius, Lithuania 11.790 (Eng 2300) 44554 at 2306 in Wallsend.

Some mornings the **9MHz (31m)** signals from R. New Zealand to Pacific areas have reached us. Their broadcast on 9.700 (Eng 0630-1110) was 24333 at 0730 in Norwich. Later, R. Australia's Carnarvon broadcast to Asia 9.860 (Eng 1800-2100) was heard here. In Bishops Stortford it rated SIO222 at 2057. At least 3 signals from S.America may also be heard here: R.Sucesos, Tariba, Venezuela 9.700, rated 55555 at 2255 by **Tony Elkins** in Bury St Edmunds; R.Nacional, Paraguay 9.735 (Spto S.Am 0800-2300), logged as 34543 at 2301 in Wallsend; R.Universo, Curitiba, Brazil 9.565 (Port to S.Am 0900-0200) which peaked 43333 at 0045 in Durham.

The 31m signals to Europe include AWR via Sines 9.670 (Eng 0800 Sun only) 44444 at 0800 in Morden; R.Netherlands via Flevo 9.715 (Eng 1130-1225) SIO555 at 1155 in Hereford; R.Tirana, Albania 9.585 (Eng 1530-1600) 43444 at 1530 in Brighton; VOIRI Tehran 9.022 (Eng, Fr, Ger, Sp, Ar 1800-2230) 54454 at 1922 in Swanwick; R.Sweden via Horby 9.655 (Fr, Sp, Eng, Ger, Sw 1900-2130) 44444 at 1950 in Brenchley; Voice of Turkey, Ankara 9.445 (Eng 2000-2030) 32433 at 2010 in Co.Down; R.Pyongyang, N.Korea 9.325 (Sp 2000-2050) 22232 at 2035 in Sunderland; R.Kiev, Ukraine 9.865 (Eng 2100-2200) SIO433 at 2100 in Sheffield; R.Beijing, China 9.880 (Eng 2200-?) 54554 at 2200 in Bridgewater; R.Sofia, Bulgaria 9.700 (Eng 2200-?) SIO333 at 2230 in Bristol.

Among the **7MHz (41m)** logs were WHRI 7.315 (Eng to E.USA 0000-1100) SIO333 at 0631 in Macclesfield; WYFR 7.355 (Eng to Europe 0600-0800) 33443

Transatlantic DX Chart

Freq kHz	Station	Location	Time (UTC)	DXer
USA				
850	WHDH	Boston, MA	0300	A
950	WPEN	Philadelphia, PA	0405	A
970	WYNZ	Portland, ME	0450	A
1020	KDKA	Pittsburg, PA	0255	A
1050	WEVD	New York, NY	0215	A
1090	WBAL	Baltimore, MD	0150	A
1200	WKDX	Framingham, MA	0520	A
1220	WKNR	Cleveland, OH	0420	A
1430	WENE	Endicott, NY	0350	A
1470	WLAM	Lewiston, MA	0230	A
1520	VWVKB	Buffalo, NY	0230	A
Canada				
590	VOCM	St. John's, NF	0150	A
620	CKCM	Grand Falls, NF	0210	A
640	CBN	St. John's, NF	0420	A
670	CKXB	Musgravetown, NF	0100	A
750	CBGY	Bonavista Bay, NF	0430	A
910	CHRL	Roberval, PQ	0400	A
920	CJCH	Halifax, NS	0155	A
930	CJYQ	St. John's, NF	0020	A
1050	CHUM	Toronto, ON	0150	A
1140	CBI	Sydney, NS	0420	A
1200	CFGO	Ottawa, ON	0230	A
1220	CKCW	Moncton, NB	0150	A
1320	CKEC	New Glasgow, NS	0300	A
1380	CFOA	Victoriaville, PQ	0220	A
1410	CKSL	London, ONT	0350	A
1470	CHOW	Welland, ON	0400	A
C. America & Caribbean				
1100	ZDK Granville R.	St. Johns, Antigua	0420	A
1190	WVBMJ	San Juan, Puerto Rico	0150	A
1420	ACB 20	Panama	0600	A
1570	Atlantic Beacon	Turks & Caicos IIs	0200	A?
1610	Caribbean Beacon	The Valley, Anguilla	0100	A
South America				
1100	R.Globo	Sao Paulo, Brazil	0540	A
1280	ZYJ455 R.Tupi	Rio, Brazil	0455	A
1380	CB138 R.Colo Colo	Santiago, Chile	0410	A
1420	HJBH Caricol	Santa Marta, Colombia	0545	A
1520	Ecos del Tomar	Bogota, Colombia	0555	A
DXers				
A: Jim Willett, while at Dollar Law, Scotland.				

EQUIPMENT USED

Leo Barr, Sunderland: Matsui MR-4099 + r.w. in loft.
 Chris Bazley, Rayleigh: Panasonic RBF-40L + 20m wire
 Charles Beanland, Gibraltar: Sangean AT5-803 + a.t.u. + r.w.
 Darren Beasley, Bridgewater: Philips D2935 + loop or a.t.u. + 10m wire.
 Kenneth Buck, Edinburgh: Lowe HF-225 + r.w. in loft or loop.
 Tim Bucknall, Congleton: Triumph 100D or Unitra D-401 or Boots SRR 33T.
 Noel Carrington, Sutton in Ashfield: Philips D2999 + r.w.
 Jim Cash, Swanwick: Kenwood R5000 + trap dipole.
 Bill Clark, Rotherham: Sony ICF-SW-7600 + built-in whip or r.w.
 John Coulter, Winchester: Yaesu FRG-7 + r.w.
 Antonio De Abreu-Teixeira, Durham: Sony ICF-2001D or ICF-SW 7600 + 9.5m wire.
 David Edwardson, Wallsend: Trio R-600 + inverted V trap dipole.
 Tony Elkins, Bury St. Edmunds: Icom R-9000 + a.t.u. + 2 co-phased 5R.
 David Forester, Newcastle-under-Lyme: Yaesu FRG-7 + r.w.
 Ron Galliers, London: Philips D2935 + a.t.u. + 30m wire.
 Alf Gray, Birmingham: Codar CR70 + PR30 + a.t.u. + Ex-Army whip.
 Simon Hamer, New Radnor: Lafayette HE30/Grundig S1400/Sony ICF-2001D + a.t.u. + r.w. or loop.
 Robin Harvey, Bourne: Matsui MR-4099 + s.w. loop.
 Francis Hearne, Bristol: Sharp GFA3 cassette radio + r.w.
 Sheila Hughes, Morden: Sony ICF-7600DS; Panasonic DR48 + 15m wire.
 Rhoderick Illman, Thumrait, Oman: Sony ICF-7600DS + whip or 23m wire
 Cyril Kellam, Sheffield: Sony ICF-7600DS + AN-1 or 25m wire.
 Bryan Kimber, Hereford: Zenith R7000 or Realistic SX190 + 20m wire.
 Robert Lawrence, Cheltenham: Hitachi cassette radio + 20m wire.
 Eddie McKeown, Co.Down: Tatung TMR-7602.
 George Millmore, Wootton, IOW: Tatung TMR-7602 + loop or Racal RA17L + v.l.f. converter + r.w.
 Sid Morris, Rowley Regis: Kenwood R5000 + 31m wire.
 John Nash, Brighton: Kenwood R5000 + Datong AD370.
 Sergei Olejnik, Kalush, Ukraine: Ishim-003 + 70m wire.
 Fred Pallant, Storrington: Trio R2000 + r.w. in loft.
 John Parry, Northwich: Realistic DX-400 + 33m wire.
 Roy Patrick, Derby: Lowe HF-125 + 44m wire.
 Don Phillips, Bridlington: Yaesu FRG-8800 + a.t.u. + r.w.
 Philip Rambaut, Macclesfield: Int. Marine Radio R.700M + r.w.
 John Robertson, Alnwick: Lowe HF-225 + E/W r.w.
 John Sadler, Bishops Stortford: Realistic DX-400 + SW Loop.
 Chris Shorten, Norwich: Matsui M-4099 + 10m wire.
 John Stevens, while in Melvick, N.Scotland: Icom R-70 + r.w.
 Darran Taplin, Brenchley: Yaesu FRG-7700 + FRA-7700 or FRT-7700 + Zepp.
 Phil Townsend, London: I.f. converter + Lowe SRX-30 + loop or a.t.u. + r.w.
 Ted Walden-Vincent, Gt.Yarmouth: Grundig Satellit 1400L + r.w.
 Jim Willett, Dollar Law, Scotland: See m.w. transatlantic DX text.
 Lee Williams, Birmingham: Sony ICF-2001D + built-in whip.
 Julian Wood, Elgin: Kenwood R2000 + Yaesu FRT-7700 a.t.u. + 6m wire.

at 0710 in N.London; AIR via Aligarh 7.412 (Eng to Europe 1830-1945) SIO444 at 1830 in Winchester; R.Japan via Moyabi 7.140 (Eng to S.Africa 1900-1930) SIO333 at 1915 in Hereford; R.Korea, Seoul 7.550 (Kor, Ar, Eng to M. East, Africa 1700-2130) 34333 at 1748 in Oman and 44444 at 2055 in Norwich.

Three **6MHz (49m)** signals from S.America were heard: Brasilia, Brazil 6.180 (Port 0900-0100) at 2235 by **Sergei Olejnik** in Kalush, Ukraine; R.Globo Rio, Brazil 6.030 (Port 0900-0400) SIO343 at 2308 in New Radnor; R.Nac. Buenos Aires, Argentina 6.060 (Sp 0100-1100) 22222 at 0055 in Durham.

watching brief

Andy Emmerson G8PTH
71 Falcutt Way, Northampton NN2 8PH

We continue our beginner's guide to amateur television equipment and techniques, starting off with ways of producing pictures.


Video Sources

From a transmitting viewpoint, virtually any video device is ideal for amateur television, so long as it puts out a clear picture. Because of the additional cost of the transmitting apparatus, most ATVers have to consider their budgets and may not spend a fortune on the camcorders that some video enthusiasts might consider first. ATVers are also good at getting bargains and seeking out and refurbishing second-hand equipment, so not everyone uses the latest model. Overall, the VHS format has the popularity edge on 8mm, and the compact size of the VHS-C camcorders has made them the favourite with recent purchasers.

People from a professional background prefer the stability of the shoulder-mount full-size VHS cameras, and there are plenty of second-hand bargains among these. Of course, you have to ask for them - any dealer would prefer to sell you a new machine but usually has some trade-ins which he'll sell.

Cheaper than all the foregoing options are old black-and-white surveillance cameras, which often give a better picture than any colour device. At rallies they should not cost more than £20 or £25, though you may have to pay extra for a decent lens. Quite a few people place a surveillance camera on a wall bracket (just like the surveillance cameras in shops): if this is aimed looking down on the operating position in the shack, you can be seen while you talk to your QSO partners.

There are other ways of generating pictures apart from cameras. One way is to use a home computer, but this may have problems. Not all comput-

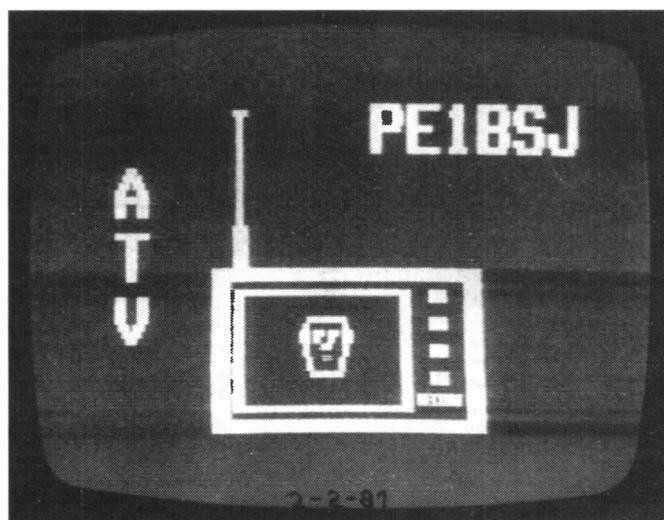

ers produce a TV picture to the normal broadcast standards and any displays involving small text will probably not be easy to make out 'at the other end'. In any case, computer graphics look pretty boring after 30 seconds, nothing like a live camera picture. People also build test signal and caption generators from integrated circuits: these are compact and handy. The so-called Cropredy design can be had from Cirkit and there are also third-party add-ons and programmed chips available for this.

ATV on the Cheap

Surprisingly perhaps, the lowest cost entry to amateur television is at 10GHz (also known as 3cm or X-Band). Although this is microwave territory, almost as high in frequency as satellite TV, the 'fall-out' from this satellite market has made this the cheapest band to choose. An added bonus is that the equipment is extremely compact and uses flea power, a truly eco-friendly band!

Of course, the activity on this band is confined to places where there is a 3cm repeater and some keen types who take their equipment to hilltops for portable operation. So far, we have 3cm TV repeaters only in Milton Keynes and near Burton-

on-Trent, but others are proposed in Bristol and Northampton. Looking a little further, it is highly likely that 3cm will become the band for amateur television and I expect every district to have a 10GHz repeater in ten years time.

Why is this? Simply because whole system is cheap and attractive, while avoiding the problems of other ATV bands. The 430MHz band is most people's first choice, but it is crowded and quite expensive to equip yourself for. At 1296MHz there is far less amateur activity, but the band is just as crowded with radar transmissions in some districts; it is also just as expensive to get started. But on 10GHz none of this applies, and you can get started for well under £100. The usual roof-top clutter of chimneys and trees, which absorb your precious r.f. so effectively at 1296 and 430MHz, are less significant at 10GHz, simply because the signals are reflected rather than absorbed.

Dave G4NJU, who is a keen exponent of this band, explains how cheap it really is. A typical transmitter would use a Plessey burglar alarm head (cost £5 or £10), which you would equip with a compact 20dB gain horn antenna which you can make yourself easily from printed circuit board. For reception you

If a camera is unavailable, a home computer can be pressed into service as a picture source. Simple graphics can be quite effective, as in this picture from Holland, but fine detail will be lost in weak signals and any static display soon gets boring.

would use a 10dB gain horn and a modified Astra satellite LNB and receiver. These will cost you between £50 and £70 as rally bargains. Even allowing for extra components, power supply and a smart instrument case, you should still have change out of £100, which is not something you can say for most amateur radio modes.

Obviously you will need some skill to do this, but all the information is available (or soon will be) in magazines like *CQ-TV* and *VHF Communications*. As interest increases, no doubt dedicated conversion kits will come onto the market. Note that generally a lower gain antenna is used for receiving: this is because higher gain means narrower beamwidth, which is not ideal as a search antenna. On the other hand, if you are always going to be receiving a fixed transmitter (such as a repeater), a high gain antenna might be all right. Normal satellite TV receivers are fine, but they generally need to have their video gain increased, according to Dave.

Of course, there is no objection to a more completely home-brew system, but this is not really the province of the newcomer. I'll describe some ideas for a more state-of-the-art system next time, but be reassured that it will be entirely coaxial and solid state: the old days of klystron tubes and waveguide 'plumbing' are over!

If there are any topics you would like covered in this column, please write in and tell me. Feedback is definitely encouraged!

dressler

COMMUNICATIONS LTD.

DRESSLER ACTIVE ANTENNAS

ARA60

ACTIVE ANTENNA
50kHz - 60MHz
WITH LIMITED
PERFORMANCE
UP TO 100MHz

Exciting new
Shortwave Active
Antenna
940mm High
64mm Diameter
Complete with
cable + PSU &
Interface

£163.00

ARA 1500

50MHz - 1500MHz
Frequency Gain
50-1000 11.5dB
100-1500 11.0dB


£163.00
'N' Connection

Now fully
tuneable
interface.
Intercept
point +
21dBm
Typical.

THE LARGEST U.K. ICOM DEALER

Authorised Kenwood, Yaesu & Standard Dealer

Icom IC-R1
£325.00

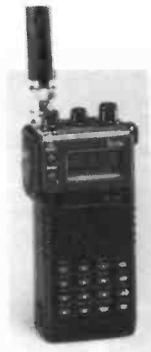

PHONE FOR LATEST
PRICES AND OFFERS

SPECIAL STOCK
CLEARANCE
OFFER

FRG 8800 or
ICOM R72 or
Kenwood R2000:

£585

AOR

AOR 3000 £675.00
AOR 2000 £259.00
AOR 2800 £395.00

NRD - JRC

535 + ARA 60 £1075.00
535 only £975.00

All accessories available.

STANDARD

AX 700 £545.00

FAIRMATE

HP200 £269.00
Yupiteru MVT7000 £275.00

YAESU

FRG 8800 HF Receiver £585.00
FRG 9600 50-950MHz £500.00
R5000 HF Receiver only £895.00
R2000 £585.00
LOWE 225 £429.00

SONY

ICF SW 7600 £145.00
ICF 77 Available Soon

SALE

Full Remote
Control
25999.995MHz
200 Channel
Memory

£299

• 191 FRANCIS ROAD •
• LEYTON •
• E10 6NQ • LONDON •
OPEN MON-FRI 9.0-5.30
OPEN SAT 9.30-4.30

PHONE: 081-558 0854/081-558 1415

FAX: 081-558 1298


TELEX: 8953609 LEXTON G

24hr Hotline ansaphone 081-558 0854. Prices correct at time of going to press. Please phone for latest quote. Or contact your local agent any time on the following number: Terry (Biggleswade, Beds.) 0767 316 431.



SPECIAL OFFERS

Icom R71 + ARA 60 £875.00
Icom R7000 + ARA 1500 £1015.00
Icom R7100 + ARA 1500 £1050.00
Icom R9000 + ARA 60 & 1500 £4000.00



SHINWA
SR001



ALL SPECIAL
PRICES

COME AND VISIT OUR TOTALLY
REFITTED LONDON SHOWROOM

Bredhurst electronics



BREDHURST ELECTRONICS LTD.
High St, Handcross, W. Sx. RH17 6BW
(0444) 400786

SITUATED AT SOUTHERN END OF M23 — EASY ACCESS TO M25 AND SOUTH LONDON

RECEIVERS

LOWE HF150	£TBA
Lowe HF225	£429
Icom ICR71	£875
Icom ICR72	£689
Kenwood R2000	£599
Yaesu FRG8800	£649
Yaesu FRV8800 V.H.F. Converter	£102
Kenwood R5000	£895

HF TRANSCEIVERS

Kenwood TS950S	£2995
Kenwood TS940S	£1995
Kenwood TS850S	£1325
Kenwood TS440S	£1150
Kenwood TS690S	£1325
Yaesu FT990	£1849
Yaesu FT767GX	£1599
Yaesu FT747GX	£659
Icom IC765	£2550
Icom IC735	£1000
Icom IC725	£779
Icom IC726	£1015
Ten Tec Agronaut II	£1295

2M TRANSCEIVERS

Kenwood TH27E	£254
Kenwood TH205E	£178
Kenwood TH215E	£178
Kenwood TR751E	£610
Kenwood TM241E	£295
Yaesu FT411 + FNB10	£260
Yaesu FT290R11	£429
Yaesu FT26 + FNB25 + NC28C	£245
Yaesu FT212RH	£325
Icom IC2GE	£269
Icom IC229E	£299
Icom IC275E Inc PSU	£1090
Icom IC2SE	£279
Icom IC2SET	£299
Icom IC2SRE	£429

70CMS TRANSCEIVERS

Kenwood TM441E	£325
Kenwood TH47E	£275
Yaesu FT790Ril	£499
Yaesu FT811 + FNB10	£274
Yaesu FT712RH	£359
Icom IC4GE	£289
Icom IC4SE	£304
Icom IC448E	£349
Icom IC4SRE	£445

DUAL BAND TRANSCEIVERS

Kenwood TM731E	£675
Kenwood TM702E	£455
Yaesu FT470R + FNB10	£424
Yaesu FT736R	£1359
Icom IC322OE	£510
Icom IC2400E	£649
Icom IC2500E	£689
Icom IC24E	£385
Standard C528	£387

SCANNING RECEIVERS

Icom ICR7100	£1050
Icom ICR1	£369
Icom ICR100	£510
AOR AR2000	£259
AOR AR3000	£765
AOR AR2500	£419
AOR AR2800	£395


ANTENNA TUNER UNITS

FRT7700	£60
FC757AT	£357
AT230	£213
AT250	£374
ICAT150	£335
BW VS300A Transmatch	£129.95

CHALLENGER DX-VI MULTIBAND GAP ANTENNA

- ★ Launches RF from an elevated GAP.
- ★ Eliminates earth loss.
- ★ Comes pre-tuned.
- ★ Uses only 3 radials @ 25 feet.
- ★ Total bandwidth on 40, 20, 15, 12, 10, 6, 2 metres, 130kHz on 80 metres.

£229.00

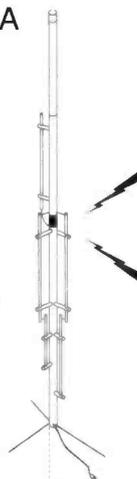

GOODS NORMALLY DESPATCHED WITHIN
24HRS - PRICES CORRECT AT TIME OF GOING TO
PRESS - E&OE

MAIL ORDER & RETAIL

ANTENNA BITS

	P&P
PB1 1:1 Balun 2kW P.E.P	£17.95 £2.00
LC160 160 Mtr Wire Antenna Shortener (Pairs)	£22.95 £2.00
LC80 80 Mtr Wire Antenna Shortener (Pairs)	£23.95 £2.00
T15 21MHz Traps 1kW (Pairs)	£37.90 £2.00
T20 14MHz Traps 1kW (Pairs)	£37.90 £2.00
T40 7MHz Traps 1kW (Pairs)	£39.90 £2.00
T80 3.5MHz Traps 1kW (Pairs)	£39.90 £2.00
16SWG Hard Drawn Copper Wire (50 Mtrs)	£12.95 £2.50
Small Ceramic Egg Insulators (each)	£0.65 £0.30
Large Ceramic Egg Insulators (each)	£0.85 £0.40
300Ω Slotted Ribbon Cable (per mtr)	£0.58 £0.10
450Ω Slotted Ribbon Cable (per mtr)	£0.50 £0.10

PALOMAR PRODUCTS

R-X Noise Bridge for antenna checks up to 100MHz	£59.95
Receiver Preamp - 1.8 to 54MHz	
Up to 20dB gain	£119.95
Transceiver Preamp - R.F. Switched	
up to 20dB gain	£149.95
Super Snooper - vertical indoor antenna for SWL	£39.95
Loop antenna - Directional indoor antenna 6 loop ranges phone for details	
Tuner Tuner - ATU adjustment without transmitting	£99.95
SWR & Power meter - LED display SWR without adjustment	
20W 200W 2000W PEP	£129.95
2W 20W 200W 2000W PEP expanded display	£189.95
VLF converter - 10 - 500kHz converter	£79.95
Baluns 350W PEP 1.7 - 30MHz	£23.95 each
1:1, 1.5, 2:1, 3:1, 4:1, 5:1, 6:1, 7.5:1, 9:1, 12:1, 16:1	
Baluns - up to 6kW PEP phone for details	

BREDHURST ELECTRONICS LTD HIGH ST, HANDCROSS, W. SUSSEX. RH17 6BW (0444) 400786

Open Mon-Fri 9am-5pm except Wed 9am-12.30pm. Sat 10am-4pm

A NEW TOOL FOR A NEW TECHNOLOGY

Scanmaster

Spectrum Planning? Surveillance? Management?

Activity Monitoring? System Engineering?

**Why not upgrade your Scanning Receiver with the
New SCANMASTER™ II Controller?**

Scanmaster™ II is a "black box" which plugs into the Remote Socket on your Scanning Receiver and takes over control of the Radio. No programming is required to use **SM2™** as it has its own powerful commands to perform Searching, Memories, Remarks, Logging, Activity Reports, and many other things. It generates **INFORMATION** and you can control what sort and how. This information can be uploaded, downloaded, printed, stored, etc. You talk to **SM2™** with a Terminal via an **RS232** Serial Port. This would usually be **ANY** Computer running a simple terminal/comms program. Anything to or from the terminal is automatically stored in spare memory, backed with a lithium battery, and can be viewed at any time, even if **SM2™** has been turned off for a while. **SM2™** uses the latest microprocessor technology and is designed to be **User Friendly**. **SM2™** has its own Clock/Calendar with a lithium battery so it keeps the date/time even when turned off. **SM2™** has a powerful **Scheduler** so that jobs can be set up to run on a certain date/time, at date/time intervals, for a date/time duration, or for a number of times. **SM2™** runs from 12V D.C. and is ideal for vehicle or portable use. It is **LOW-COST** so every Radio Engineer should have one!

SM2™ is designed to be **upgradable**, and will run many different radios with just a change of software and connecting leads. It will accept **Plug-In Boards** to further expand its power and usefulness. Once you have used **SM2™** you will wonder how you ever used a Scanning Receiver without it !!

- Powerful Activity Reports
- Over 1300 Memories
- Clock/Calendar (Lithium)
- Versatile Lockouts
- Output for Databases (Comma Delimited)
- Powerful Scheduler
- Assign Remarks
- Low cost, easy to use
- Sophisticated Logging
- User Friendly Commands
- Large Memory + Battery
- Remote/Unattended Use
- Parallel Printer Port
- Status Indicator Panel
- Many Search Bands
- Tape Recorder On/Off
- Extensive User Manual
- Takes Plug-In Boards
- P.C. Upload/Download

Many more features !! Ask for more information.

SM2™ is supplied complete with connecting leads and a software package fitted to drive one the following Scanning Receivers:

AR3000 AR2002 CHASE IC-R7000 IC-R9000 FRG9600
(Upgrades are available from time to time)

How to Order: (Specify type of Receiver & Computer)
Send Cheque, Bank Draft, or Mastercard/Access/Visa No. & Exp. Date. Official Orders accepted from Govn't, Education, Large Co.s, etc.

Special Price....£249.99

Delivery: Ex Stock, subject to availability

28 Day Money-Back Guarantee if not entirely satisfied.
Life-Time Service Guarantee (Subject to conditions)

EMP

L I M I T E D

51 High Street, Portland, Dorset

DT5 1JQ, England

Phone: (0305) 826900



Overseas
Agents Wanted

Scanmaster™ II Plug-in Boards

SM2™ is able to take extra internal plug-in boards & software packages to further expand its power and usefulness. All boards except **ROMCARD™** contain their own operating software and will work with any of the main **SM2™** software packages thereby allowing the various boards to work with any Scanning Receiver supported by us.

Available Now...

ROMCARD™ enables **SM2™** to hold up to 8 different software packages so that **SM2+ROMCARD** can drive up to 8 different Scanning Receivers with only a change of connecting leads. Upon performing a cold start, **SM2™** is able to detect if **ROMCARD™** is fitted and if so, it displays all the software packages fitted on **ROMCARD™** on a menu for user selection. Supplied with one software package and set of connecting leads for **£49.99**
Software available for:

AR3000 AR2002 CHASE IC-R7000 IC-R9000 FRG9600

Available Soon!!

TONECARD™ is able to **Decode & Encode** a variety of signalling tones including **DTMF, SELCALL, CTCSS & FFSK**. (MPT1317, etc) and also decode and action signalling protocols such as **TRUNKING** (MPT1327, etc), **JRC Band, BANDIII**, etc. **SM2+TONECARD** can drive a transceiver if you want. **SM2+TONECARD** can control more than just Scanning Receivers!

JRC ROM™ is an optional software package for **TONECARD** and is tailor made to support the new **JRC Band** signals used by the Gas & Elect. Co.s. Many powerful features for diagnostic and engineering uses.

CELLCARD™ contains the same modem/filter chipset as a cellular telephone and **SM2+CELLCARD™** can decode the signalling protocols used on the UK **TACS** system and optionally, the **AMPS** system. It can decode data and commands and can do channel hopping and other things. **CELLCARD™** can be used as a powerful diagnostic tool and is available to **AUTHORISED USERS ONLY !!**

SCANMASTER™ I ??

The Old Original, still going strong and still available for the

AR2002, IC-R7000 & FRG9600

for only **£153.26**

SALE

SALE

The London Radio Communications Specialists ASK Electronics Limited

248 Tottenham Court Road, London, W1P 9AD Tel: 071-637 0353/0590

Shortwave Receivers/Transceivers/Satellite Radios

YOUR SONY RADIO SPECIALISTS – FULL WORLDWIDE SONY GUARANTEES

An award winning masterpiece
ICF2001D kit
£319.95 only

Finest all-round pro-receiver in the business.



* FM/LW/MW/AIR multi-band reception * 32 station preset memory * Synchronous Detector Circuit * PLL quartz-locked synthesiser circuit digital/analogue tuning * 2-way scan tuning (memory, broadcast, define) * 2-position tone control * Direct metre band access * 4-event programmable time * AM attenuator SSB reception * External antenna for AM, FM and AIR band * 288 x 159 x 52mm (w/h/d) 1.7kg.
2001DSYSTEM-ICF-2001D with active antenna AN-1 in one complete package. Single radio without kit.


£275.00

SONY ICF SW-7600
* PPL synthesised multi-band digital radio * 4-way tuning * Direct frequency LCD read out * 10 memory presets * 10 key auto and manual scan * Full continuous waveband coverage 153-29995kHz: FM76-108MHz * Single side band and fine tune controls * Tone control * External aerial socket * Record out socket * 12/24 hour LCD clock * 65-minute sleep timer * Supplied with waveband manual, case and wrist strap*

£135.00*

WA8800 SLIM STYLED TRAVELLERS SHORTWAVE MULTIBAND AND STEREO CASSETTE RECORDER

* FM/MW/SW x 8.0 band * Dual conversion circuit (SW) * Auto reverse stereo cassette deck * LCD clock/alarm/timer/60 minute sleep timer * Tape counter * Auto shut off * Stereo recording facility * Built-in stereo speaker * Stereo mic supplied * DC in socket * Black finish***£199.95*** only
ICF-SW7600 inc SSB-stereo FM**£??**
ICF-SWIE**£145.00**
SWIS kit**£199.95**



ICF SWIE AND CONVENIENT SUPPLIED ACCESSORIES: ACTIVE AERIALS, AUTOMATIC MULTIVOLTAGE MAINS ADAPTOR, HARD CARRYING CASE THE WORLD'S SMALLEST SHORTWAVE RADIO

* FM stereo MW/LW/SW PLL synthesised tuner * Dual conversion system * LCD frequency read out * Multiple tuning system * 10

key/scan/memory * 10 memory presets * Cassette size case * Clock/timer facility * Supplied with stereo headphones, compact antenna.



CALL OUR MAIL ORDER HOTLINES ON 071-637 0353/0590 NOW!

YACHT BOY SALE!!

GRUNDIG RADIOS

Concert Boy 225.....	£36.70	Satellite 500.....	£275.00
Yacht Boy 220.....	£56.99	Satellite 650.....	£459.00
Yacht Boy 230.....	£73.00	Cosmopolit.....	£91.90

D1875

* Compact 12-Band Portable Radio * LW/ MW/ FM/9 short wave * Large tuning control * Tuning LED indicator * Telescopic and ferroceptor aerials * DC supply connection * Earphone connection * Wrist strap * Attractive pouch



£49.95



PHILIPS SHORTWAVE RADIOS

D2345

* Portable Radio
* LW/MW/FM/2 x SW * Fine Tuning Control * Mains/battery supply



£24.95



BEST BUY!

PHILIPS D2935 RADIO

D2935

* All electrical digital world receiver **£119.00**
* LW/MW/FM/13 x SW * Continuous tuning over total AM band * Direct keyboard tuning * 9 station memory * Variable pitch BFO for CW/SSB reception * Touch panel switching * LCD frequency display * Mains/battery supply.

ROBERTS RADIOS

R727 5 bands

(FM/MW/LW/SW1/SW2) 4" speaker**£79.95**

RP-26 (FM/MW/LW)

6 presets**£81.95**

RP-14**£32.95**

R747 3 bands**£92.95**

RC35

Cassette Radio inc 4 FMs...**£60.95**

RFM3 3 bands

Very small.....**£59.95**

RC-30

Mono cassette radio.....**£51.95 only**



ALINCO COMMUNICATIONS – PROFESSIONAL TRANSCEIVERS

DR-590.....

£489.95

Can receive UHF/VHF. Full duplex operation, code squelch selection facility.



DR-112E

45 watts FR output, 14 multi-function memory channels.....**£249.95**

DJ 560 handheld

Independent UHF/VHF * Dual watch function paging function for group calling * 21 scanning modes – quiet listening – by code squelch * 40 memory channels * Bell indicator for incoming calls.

DJ120.....**£175 only**

* Full LCD display, frequency lock * 10 memories * 2.5 watts output

DJ 160.....**£214.95**

DTMF squelch, 3 page built-in function * Monitor * Memory

**GOVERNMENT & LOCAL AUTHORITY,
MILITARY, COMPANY ORDERS ARE WELCOME.**

Tel: 071-637-0353/0590

Telefax: 071-637 2690

IF YOU ARE THINKING OF BUYING A NEW SCANNER...

MAKE SURE YOU RING US FIRST FOR THE BEST DEAL

FAIRMATE HP2000 ...£?

JUPITER£?

AOR2000£?

BEARCAT£?

Part Exchange Welcome...Part Exchange Welcome...Part Exchange Welcome...Part Exchange Welcome

SANGEAN ATS 803A

(Direct Key-in World Receiver with Quartz Alarm Clock Timer)

SPECIFICATIONS & FEATURES

★ 150-29,999 continuous tuning with no gaps. Phase locked loop-double conversion Superheterodyne
 ★ Full Shortwave/AM/SSB 150-29999kHz No Gaps! + FM 87.5 - 108 Mono/Stereo ★ Five Tuning Functions: Direct Press Button Frequency Input Auto Scanning. Manual Scanning Memory Recall and Manual Tuning Knob ★ Built-in Clock and Alarm. Radio turns on automatically at preset time and frequency. ★ Large digital frequency display. ★ Fourteen Memories - Nine memory channels for your favourite station frequencies. Last setting of mode and waveband stored in 5 memories. ★ Direct press-



button. Access to all 12 Shortwave broadcast bands. ★ Two power sources - battery or AC mains adaptor. ★ General coverage of all a.m. bands in LW/MW/SW (Dedicated Broadcast Band Coverage on all versions) Plus of course the f.m. band for quality sound broadcasts in headphone stereo. ★ SLEEP Function turns the radio on or off after an adjustable time of 10-90 minutes. ★ Separate BASS and TREBLE controls for maximum listening pleasure. ★ External antenna jack for better reception. ★ Adjustable r.f. GAIN control to prevent overloading when listening close to other strong stations or if there is interference. ★ New improved wide/narrow filter (6/2.7kHz) ★ b.f.o. control (Beat Frequency Oscillator) enables reception of SSB/USB/LSB (single side band) and c.w. (Morse Code) transmissions. ★ Illuminated display to facilitate night-time use. ★ Designed for both portable and Desk Top use. ★ Five dot LED Signal Strength Indicator.
 DIMENSIONS: 29.2cm x 16.0cm (11.5in x 6.3in x 2.36in)
 OUTPUT: 1200mW (10% THD) WEIGHT: 1.7kg (3.75lbs) Without batteries. Wide/Narrow Filter Switch.

£99.95 + £5 check, test and P&P.

Short Wave ATU will improve your shortwave antenna £39.95 + £3.00 P&P
 Short Wave Long Wire complete £10.95 + £3.00 P&P

OR

ATU and Long Wire Normal Price £50.90
 Package price: £48.00 + £4.50 P&P
AR300 XL Aerial Rotator and control. Max Load: 100lb **£39.95** + £2.95
AR201 Rotator Support Bearings provide additional support for long aeriols. £15.00 + £1.50 P&P.

S.R.P. TRADING

Manufacturers and distributors of communications equipment
 Unit 20, Nash Works, Forge Lane, Belbroughton,
 Nr Stourbridge, Worcestershire.
 Telephone: (0562) 730672 Fax: (0562) 731002


SHOW ROOM OPENING TIMES:
 Mon - Fri: 9.00 - 5.30pm Sat: 9.00 - 1.00pm
 Callers welcome.

Trade enquiries welcome. Contact Stuart or Graham

SKY SCAN Desk Top Antenna Model Desk 1300

Built and designed for use with scanners. Coverage: 25 to 1300MHz Total height - 36ins - 9ins at widest point. Comes complete with 4 metres of RG58 coax cable and BNC connector fitted. Ideal indoor - high performance antenna and can also be used as a car antenna when your car is static. REMEMBER YOUR SCANNER IS ONLY AS GOOD AS YOUR ANTENNA SYSTEM!

£49.00 + £3.00 p&p.

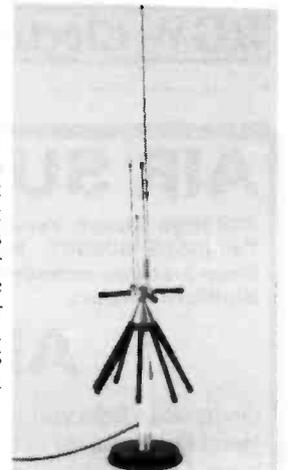

SKY SCAN V1300 Antenna

Most discons only have horizontal elements and this is the reason that they are not ideal for use with a scanner. Most of the transmissions that you are likely to receive on your scanner are transmitted from vertically mounted antennas. The Sky Scan V1300 discone has both vertical and horizontal elements for maximum reception. The V1300 is constructed from best quality stainless steel and aluminium and comes complete with mounting pole. Designed and built for use with scanners.


£49.95 + £3.00 p&p.



SKY SCAN MAGMOUNT Mk II

For improved performance, wide band reception, 25 to 1300MHz. Comes complete with protective rubber base, 4m RG.58 coax cable and BNC connector. Built and designed for use with scanners.

£24.95 + £3.00 p&p.

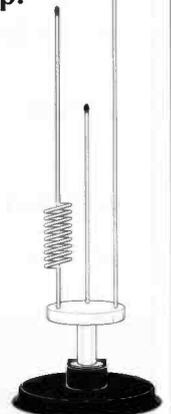

Name
 Address

Cheque P/O



Visa/Access No.



Expiry Date

Signature:

AR1000/FAIRMATE SIDEBAND

ADDS USE/LSE MODES TO YOUR EXISTING SCANNER. A READY BUILT UNIT FULLY TESTED AND COMPLETE WITH INTERFACE LEAD AND INSTRUCTIONS. POWERED BY INTERNAL NICADS OR OPTIONAL MAINS ADAPTOR. CONTINUOUSLY VARIABLE COVERAGE. NOT TIED TO 5kHz STEPS. £49.95 inc p&p.

SIGNAL STRENGTH METER

SMALL COMPACT DESIGN. USE FREE STANDING OR CLIP TO THE SIDE OF YOUR SCANNER. POSSIBLE USES INCLUDE INSTANCE AND DIRECTION MEASUREMENT FOR CLEARER IDENTIFICATION OF SIGNALS AND OPTIMISING OF AERIAL SYSTEMS £23.95 inc p&p.

WRITE FOR FURTHER DETAILS SAE PLEASE CHEQUES
POs TO:

RGW Electronics 5 Braunston Place, Rugby
Warkwichshire CV22 5JZ

MEDIUM WAVE LISTENERS

DO YOU ENJOY DXING THE MEDIUM AND LONG WAVE BANDS? THEN MEDIUM WAVE NEWS IS FOR YOU. THE ONLY SPECIALIST MAGAZINE FOR THE MW/LW LISTENER IS AVAILABLE BY SUBSCRIPTION FROM: THE MEDIUM WAVE CIRCLE, 137a HAMPTON ROAD, SOUTHPORT, MERSEYSIDE PR8 5DY
(SAE for full details, or for sample copy of magazine send 60 pence in stamps or 2 IRCs)

SCANNER MODIFICATIONS

Turbo-charge your scanner with a little help from RADIO RESEARCH
AR-1000/2000 - Fairmate HP-100-200 FULL Coverage Modification

0.5-1300MHz with NO GAPS! - Why pay more ???	£5.00
Customising Packs for REALISTIC PRO 2004, 2005, 2006 & 2022	
Packed with Modifications for your scanner (Please state model)	£5.00
S-Meter Driver for REALISTIC PRO 2004m 2005 & 2006t	17.50
400 Channels upgrade for the REALISTIC PRO 2004	£5.00
KIT £12.50 AUTO-VOX BUILT £25.00. Send a SAE for full details and prices of all our Scanner Upgrades.	
RADIO RESEARCH (SWM), 3 Pasture Close, Whitmore, Staffs ST5 5DQ	

AIR SUPPLY

83B High Street, Yeadon, Leeds LS19 7TA
Tel: (0532) 509581 Fax: (0532) 508772
Shop just two minutes from Leeds
Bradford Airport.

 Shop hours: 
1000 - 1330
1430 - 1700

Hours do vary - CLOSED
WEDNESDAY

AIR TRAFFIC CONTROLLERS

On hand to help you towards an interesting & rewarding pastime. Specialists in **AIR BAND RADIOS & SCANNERS**. Hand held, mobile or base - AOR, Signal, Black Jaguar, Yupiteru, Icom, Uniden, Sony, Nevada: HF receivers from Sony, Icom, Lowe, Yaesu, Kenwood: wide range of accessories, aerials, plus CAA publications, maps, books, models from IMC, Wooster, Sohabak, photos, souvenir products from British Airways & British Midland Airways. Large range of pilots products agents for Transair, AFE & Airtour. Plus lots more. If you would like our info pack send large SAE & stamps to value of 50p.

PRACTICAL WIRELESS PW

★ **Constructional** - The PW Challenger Simple 3.5MHz Transmitter

★ **Antennas** - Fred Judd G2BCX Looks At Long Wire Multi-Band radiators.

★ **Special offer** - Buy A Three Band VHF Antenna And Discover The Delights of 50, 70 and 144MHz.

★ **Reviews** - Yaesu FT990 HF Transceiver

★ **Plus** - Christmas Subscriptions & Amateur Radio Christmas Gifts Offer.

Full Results of the
Practical Wireless
144MHz QRP Contest
in the December issue.

★ Also featuring -

- ★ Packet Panorama
- ★ Satellite Scene
- ★ Getting Started -
The Practical Way
- ★ CB High & Low
- ★ Competition Corner

AND DON'T FORGET TO DIAL
WIRELESS-LINE
ON 0898 654632

FOR THE LATEST NEWS OF PROPAGATION, DX, SATELLITES, SPECIAL EVENTS, RALLIES, ETC.
BULLETINS UPDATED EVERY SATURDAY.
calls charged at 36p per minute off-peak, 48p per minute peak.

For subscription details see page 63 or write to the address below:
PW Publishing Ltd. Enefco House, The Quay, POOLE,
Dorset BH15 1PP Tel: (0202) 678558 Fax: (0202) 666244

and there's lots more in your
action-packed
Practical Wireless, on sale
14 November 1991.

THE VINTAGE WIRELESS BOOK LISTING

Published regularly containing 100s of out-of-print, old and collectable wireless, TV and amateur radio books/magazines etc. Send four first class stamps for next issue or £2.50 for next four issues.

WANTED: Pre 1960 Wireless, amateur radio and TV books and magazines.

NEW PUBLICATIONS:

The Government Surplus Wireless Equipment Handbook. Facsimile reprint. Gives detailed information and circuit diagrams plus photos for British and American receivers, transmitters and test equipment etc. Large format. Incorporated is a surplus/commercial cross referenced valve and transistor guide. **Price £13.75 including postage.**

The HF Band Frequency List. This extensive volume covers the h.f. spectrum from 2-30MHz and gives details of transmissions outside the amateur bands including details of time schedules, plus comprehensive RTTY details. **Price £7.95 including postage.**

SECRET WARFARE. THE BATTLE OF CODES AND CIPHERS By Bruce Norman. A detailed outstanding work with emphasis on the development of modern intelligence and the use of codes and ciphers. Throws light on top secret strategies of code breaking. Includes a history of codes. Clear and concise, analysis. Extensive use of diagrams. One of the few books on cryptography. Previously unpublished material. Brand new. £4.95 including post. **Telephone orders accepted.**



CHEVET BOOKS (Dept SW)

157 Dickson Road, BLACKPOOL FY1 2EU Tel: (0253) 751858



ALYNTRONICS

129 CHILLINGHAM ROAD, HEATON,
NEWCASTLE-UPON-TYNE NE6 5XL TEL: 091-2761002

THE ONLY AUTHORISED DEALER IN THE NORTH-EAST FOR

ICOM & YAESU

WE ALSO STOCK MANY OTHER ITEMS OF EQUIPMENT FROM

MFJ ★ BUTTERNUT ★ CUSHCRAFT TONNA ★ DIAMOND ★ AOR
BEARCAT ★ FAIRMATE ★ JUPITER ★ LOWE ★ TEAM
MIDLAND ★ NEVADA ★ CTE ★ WELZ
★ REVEX ★ BOOKS & MAPS ★



LICENSED CREDIT BROKER



OPEN 10am - 5.45pm TUES - FRI 10am - 4.45pm SAT

GAREX ELECTRONICS

METEOSAT WEATHER SYSTEM

The complete basic METEOSAT system, no computer, just a plug-in and go package that can be up and running in 10 minutes. Antenna, receiver, frame store, all cables through to 12" mono monitor. **£813.25**
(or less monitor: £612.00)

GAREX VHF PREAMPLIFIERS

Miniature (only 34x9x15mm), any frequency in the range 40-200MHz, up to 25dB gain. Stock versions: 6m, 4m, 2m, 137MHz (W-Sat): **£12.21**
Airband 118-136MHz (reduced gain): **£12.21**
Other frequencies in the range 40-200MHz to order: **£14.56**

4 METRE BURST GENERATOR

Miniature (38x18x10mm) xtal controlled 1750Hz: **£18.34**

GAREX DC/DC INVERTERS

A popular line for many years. Economy package: chassis section cut from commercial R/T gear, re-wired and tidied up to make free-standing unit, no expensive cabinet, just basic value for money.
12V DC input, 250V 150mA DC output: **£11.19**
12V DC input, 400V 200mA DC output: **£12.21**

4 METRE RX CONVERTER

High quality PMR front end by famous manufacturer, modified to make a 4m converter: 10-11MHz output. Full data. Requires xtal, approx 15MHz: **£17.32**

4 METRE 0.5 WATT FM TX

Tx Low Power driver unit matching above Rx, with modulator, fully aligned, with data: **£16.30** (or + xtal for 70.45MHz £20.39) Suitable PTT fist microphone: **£4.04**

PYE ANTENNA RELAYS

12V operation, handles 50 watts up to 200MHz: **£1.99**
5 or more (each) **£1.53**

WESTMINSTER FM BANDWIDTH CONVERSION KITS

Converts 50kHz or 12.5kHz FM Westminster (UHF or VHF) to Amateur band 25kHz spec. Comprises 2 x 1F filters + squelch board **£15.25**

Lots more: Timestep world-beating Weather Satellite systems, Monitor Receivers, Pye R/T spares.

Write, fax or phone for lists. Regular lines, components and bargains for callers, Open 10am - 5pm Mon - Fri (occasional Sats).

ALL PRICES INCLUDE UK CARRIAGE AND VAT.



GAREX ELECTRONICS



STATION YARD, SOUTH BRENT, SOUTH DEVON TQ10 9AL

Phone: (0364) 72770 Fax: (0364) 72007

Weather Satellites

Timestep have been producing inexpensive weather satellite equipment for 7 years. Following our success in both the UK and North American education market, we are now bringing our expertise to the amateur satellite user. All of our equipment is designed, built and fully supported in Britain, by Timestep engineers.

Lawrence Harris uses Timestep equipment for his column in Short Wave Magazine. Les Currington who received the first Chinese Feng Yun image and presented it to Chinese Diplomats, also uses Timestep equipment.

PCSAT III

This innovative package will receive NOAA, METEOR, OKEAN, FENG YUN, METEOSAT, GOES and GMS. All images are received automatically on any PC with CGA, EGA, VGA or SVGA display.

Zoom, Pan, Contrast Stretch, False Colour, and Laser Print are just some of the features this system offers. Extensive filtering and a precision A-D are used on an internal PC Half Card, for superior image quality.

Animation from Meteosat is no mere gimmick! The atmosphere is a fluid in constant motion. Follow the dynamic progress of storms and cloud cover, on up to 100 full frames continuously animated images!

The really important feature is the ability to display in 800 pixels 600 lines and 256 colours, all at the same time. Some other systems will display 256 colours but only in far less resolution. Nearly all VGA and SVGA graphic cards are supported.

Full Satellite Resolution is received and stored by the system in a massive 512Kb file. This enables the stunning image quality and image processing.

Only £199.00 inc VAT & postage
Upgrade for £99.00 and your PC GOES in exchange.

Meteosat Receivers

Meteosat Yagi	£124.95
Meteosat Preamplifier	£92.00
20m Meteosat cable	£16.00
Meteosat receiver	£199.00
PCSAT III cable	£9.95
PCSAT III system	£199.00

Complete Meteosat system as above only £640.00 inc.

Polar Systems

We produce a professional scanning receiver for NOAA, METEOR, OKEAN and FENG YUN; and low cost antenna systems. INSTANT TRACK is the ultimate Polar tracking program for up to 200 satellites at £24.95 inc.

Computers

We can supply PCs to any specification at really good prices. Call us if you need details or if you want to purchase a complete "turnkey" solution.

Call or write for a full catalogue.


Timestep Weather Systems

Wickhambrook Newmarket

CB8 8QA England

Tel 0440 820040 Fax 0440 820281

PC GOES/WEFAX

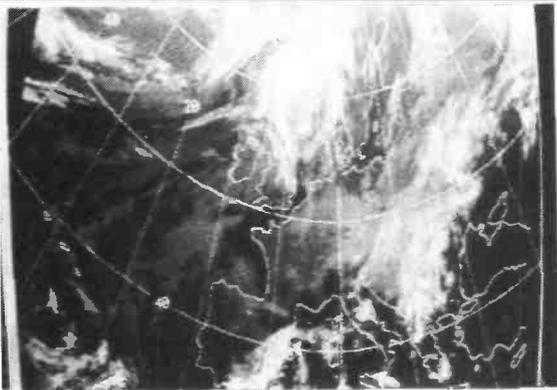

PC GOES/WEFAX enables you to receive both FAX and SATELLITE images on your PC computer.

In **FAX** mode it will display weather charts, rebroadcast satellite images, press and amateur transmissions. In **SATELLITE** mode it will capture images from both **METEOSAT** and all Polar Orbiting Satellites.

Some of its many advanced features:

Image Resolution: 640 x 800 x 16 Standard, 1280 x 800 x 256 with VGA and 1MB EMS. Super VGA Support.

Display in Black/White, Monochrome Grey Scale, Blue/Grey, Colour or User Programmable Colour. Supports all known **FAX** and Satellite transmission modes. Start, Stop, Phasing Tone recognition and Tuning Oscilloscope. Latitude and Longitude Gridding on Polar Orbiting Images. Interactive Thermal Infra red Analysis. Polar orbiting Prediction Program, Multiframe Animation. Image Brightness, Contrast, Reversal and Rotation control.

PRICE ONLY £199.00 inc. VAT. P&P £3.25

PC HF FAX 5.0

PC HF FAX enables you to receive weather charts, rebroadcast satellite pictures, amateur and press transmissions on your PC Computer.

This new version contains many improvements and enhancements over the earlier popular version.

Displays up to 16 intensity levels with 640 x 800 resolution. IOC Rates 288, 576, 864 and 1152. Line Rates 60, 90, 120, 180 and 240. Start and Stop Tone recognition with automatic unattended capture. Storage/Retrieval and Print from Disk. Image Zoom, Reversal, False Colour. Comprehensive File Management.

PRICE ONLY £99.00 inc. VAT. P&P £3.25

PC SWL

The PC SWL is a complete package allowing reception of MORSE CODE, RTTY and FEC.

- * RTTY Baudot 45,50,57,75 and 100 Baud.
- * RTTY ASCII 75,110,150 and 300 Baud
- * CIR 476 Codes FEC, SELCAL and NAVTEX.
- * MORSE CODE 1 to 40 WPM.
- * Automatic Calibration and Code Recognition.
- * Unattended Capture and Printing.

PRICE ONLY £99.00 inc. VAT. P&P £3.25

Order PC HF FAX and PC SWL together for **ONLY £178.00 INC VAT, P & P £3.25**

CALL TODAY FOR FULL DETAILS AND BROCHURES.

COMAR ELECTRONICS

Unit 10, Samuel Whites Estate,
Medina Road, Cowes, Isle of Wight
PO31 7LF Tel: 0983 200308



SSE

HIGH QUALITY ACCESSORIES

THE CHARGER & SCANNER SPECIALISTS

FOR SCANNING MONITOR RECEIVERS

JIM PSU-101

1. **JIM PSU-101 MkIV.** A high quality UK manufactured fully regulated 220-240V AC power supply with RADIO BASE HOLDER combined. For use with FAIRMATE HP-100E/200E/2000/1000AB. AOR-1000/2000. YUPITERU MVT-5000/7000/125. ALINCO DJ-X1. REALISTIC PRO-35/38. ICOM-R1. UNIDEN UBC50XL. BC55XLT. UBC70XLT. UBC100XLT. New unique features include 2 DC output sockets one for radio and the other for accessories. A bracket for BNC socket for antenna connection. Separate DC leads included. **PRICE £29.95.**

2. **JIM BH-A3.** Universal base stand for handheld scanners-transceivers etc. convenient, safe support of radio. Adjustable front stop. Heavy duty chromed base. Bracket for BNC socket for base antenna connection. **PRICE £9.95.**

3. **JIM CH-A4.** Car mounting holder for handheld scanners- transceivers with BELT CLIP support. Safe and convenient use of scanner etc. in car, truck, boat etc. **PRICE £7.00.**

4. **JIM BC-4H.** Unique FAST Universal 4 hour + 14 hour Ni-cad charger. "auto-switch-off" timer (no more guessing). Ideal Fairmate, AOR, Yupiteru etc. Leads + 4 sizes of AA holders supplied **PRICE £19.50.**

5. Watch this space for high quality Universal S meter for scanners, CB etc!

Payment by postal order or cheque. Prices include postage

Further information on SSE products, send A4 SAE to:

SOLID STATE ELECTRONICS (UK)

6 The Orchard, Bassett Green Village,
Southampton SO2 3NA
Tel: (0703) 769598



NEW
PSU-101 MK IV

REALISTIC SCANNERS

PRO 2006



ONLY **£249.95**
(list £329.95)

400Ch. AM/FM 25-520, 760 -1300MHz 240/12v

PRO 2022



ONLY **£159.95**
(list £199.95)

200Ch. 68-88, 107-174, 380-512, 860-960 MHz

We stock ALL Realistic scanners. AOR's now in stock. P/X welcome

All scanners include FREE p&p in the UK. 12 months warranty

G0CVZ

Link Electronics

(Authorised Tandy Dealer)

G6YTI



228 Lincoln Road, Peterborough PE1 2NE (0733-345731) SAE for leaflet.
Phone for latest on secondhand bargains.



COMMODORE 64 PACKET

PACKET ON THE COMMODORE, WITHOUT A TNC!

Yes, it's true, you can run packet on a Commodore 64 without the need for a costly TNC. We offer a dedicated packet modem, together with a free copy of an excellent public domain program on disc.

This really is the inexpensive way to get on the air with Packet Radio.

MODEM with FREE SOFTWARE ONLY £50.00

Send large SAE (33p stamp) for details of all our products.

J.B.P. ELECTRONICS LTD.



Unit 45, Meadowmill Estate, Dixon Street,
Kidderminster DY10 1HH Tel: (0562)753893



THE KITS WITH ALL THE BITS!

Guaranteed complete to the last nut!

COMPACT 80m CW QRP Tx/Rx

OTR3 Kit - £87.50 P&P £3.00 Ready Built - £140.00
 ★ Stable VFO ★ Sidetone ★ Audio Filter
 ★ Requires 12/14 VDC ★ Very detailed Instructions ★ Black steel case
 ★ Printed panel

40m & TOP BAND VERSIONS
 ALSO AVAILABLE

ANTENNA TUNING UNITS

TU1 Kit - £41.25 Ready Built - £57.50
 TU2 Kit - £51.00 Ready Built - £72.00
 P&P £3.00

★ Large dia. coil ★ High grade capacitor ★ Built in balun ★ Circuits to match your antenna ★ Up to 30 Watts of CW ★ TU2 has sensitive QRP/SWR meter
 ★ TU1 is ideal for SWL

QRP SWR METER

★ Specially designed for QRP ★ HF 1-30MHz
 ★ Can be set down to 1/2 watt for FSD
 ★ Ideal for milliwattling ★ Low insertion loss 0.2dB
 TUA1 Kit - complete with case & meter £18.00 P&P £1.00

CARLTON (Receiver)

80-40-20m Dc Rx

★ Receives USB, LSB and CW ★ Very sensitive and selective ★ Simple modular construction
 ★ 12-14 volt battery operated ★ Printed fascia
 Kit complete with case - £69.50 P&P £3.00

PSU 15 REGULATED POWER SUPPLY


★ Ready built ★ Mains input ★ 13.8V @ 1.5A output ★ Ideal for DTR3 & 'Carlton' ★ Fully protected

Supplied ready built - £52.00 P&P £4.00

Send SAE for brochure or call Alan G4DVM on 0602 382509

LAKE ELECTRONICS

7 Middleton Close, Nuthall, Nottingham NG16 1BX
 (callers by appointment only)



AERIAL TECHNIQUES


SPECIAL PRODUCTS FOR TV-DXING

New 10" Screen Multi-System B & W TV and Monitor



Full VHF/UHF coverage for system B/G/M/L for Europe, UK & France. 4-way power source. Mains, 12v DC. Dry batteries, also chargeable power source with rechargeable batteries. Full Video & Audio inputs via phono sockets. Unique charger circuit within the TV for re-chargeable batteries.
 £149.50 inclusive of Vat
 Carriage & Insurance £6.50

NEW Compact Combined B1/3 Array for TV-DXing.
 Total Length only 4ft 10in



Complete with folded dipoles for both Band 1 and Band3 for optimum performance. Covers Band 1 (47-70MHz) at 3.5dB gain. Band 3 (175-230MHz) at 8dB gain.
 £44.50 inclusive of Vat
 Carriage and Insurance £6.50
 VHF to UHF Upconverter, Model 3638



Vertical load carrying 45kg takes 2" main mast. 1 1/2" stub mast. £44.95 inclusive of Vat. Additional Alignment bearing £18.60 inclusive of Vat. P&P on Rotor £4.50



Converts input band of 40-230MHz to equivalent bandwidth at UHF. Ideal for TV-DXing with a domestic TV. £49.95 inclusive of Vat. post & packing

Aerial Techniques, the company that knows the TV-DXing hobby. We stock a large range of equipment for all types of aerial installation, all detailed in our 29 page Catalogue at 75p, why not send for your copy today. We also have available Multi-standard TV's and Video recorders for all systems. PAL, SECAM & NTSC. Most makes of Satellite equipment carried together with decoders for Canal Plus, RAI UNO, RAI DUE, PAL/D2-MAC Satellite receivers now in stock, also SECAM to PAL Transcoders (SAE details)

SPECIAL PRICE!!! UNIDEN UST-92 D2-MAC to PAL Decoder £399.00 + VAT
 ACCESS, VISA & AMERICAN EXPRESS
 Mail & Telephone orders welcome
 (24hr service)



11, KENT ROAD, PARKSTONE, POOLE, DORSET BH12 2EH
 Tel: 0202 738232 Fax: 0202 716951



FLIGHTDECK THE AIRBAND SHOP

192 Wilmslow Rd., Heald Green, Cheadle, Cheshire SK8 3BH
 Telephone: 061-499 9350 Fax: 061-499 9349

ALL THE ENTHUSIAST NEEDS

Main Stockists of receivers by:
 SONY, ICOM, LOWE, KENWOOD, AOR, YUPITERU,
 UNIDEN, SIGNAL, WIN, FAIRMATE.
 Comprehensive range of accessories,
 aerials, books, aero-charts etc.

PX welcome, finance available (subject to status).

Open: Monday to Saturday 9.30 a.m. - 5.30 p.m.

We are located on the A34 (Wilmslow Road), 2 miles South from the M63 Junction 10, just 3 miles from Manchester International Airport

Send 50p for illustrated Catalogue from Dept. SWM4

Professional WEATHER MONITORING at low cost

FEATURES (depending on model)

- WIND DIRECTION
- WIND SPEED
- GUST ALARM
- GUST SPEED
- RAINFALL
- SUNSHINE
- OUTSIDE TEMPERATURE
- MIN-MAX TEMPERATURE
- RELATIVE HUMIDITY
- BAROMETRIC PRESSURE
- WOODEN CABINET
- MAINS & 12-24V DC

★ ★ All main readings at a glance ★ ★

SEND FOR COLOUR BROCHURE

Prices from only **£199** inc. VAT



R&D ELECTRONICS, UNIT 19, THE ST JOHN WORKSHOPS,
 MARGATE, KENT CT9 1TE. TEL: (0843) 221622

RADIO AMATEURS EXAM? PASS FIRST TIME!

Before you enrol check the benefits of RRC'S unique Home Tuition Service

RRC has helped thousands of students to success in their examinations with this unique system of postal tuition, one which guides you, step-by-step, to qualify in the shortest possible time. Only The Rapid Results College offers you all these advantages:

- A qualified personal tutor
- Study material prepared by specialists
- Completely self-contained courses
- Handy pocket-sized booklets
- Personal study programme
- Regular marked tests
- Courses regularly updated
- 48 hour despatch
- Free advice before you enrol
- Telephone Helpline
- Free 'How to Study' Guide
- Instalment Plan
- Free Postage on course material
- Worldwide Airmail Service
- Extra tuition free if you don't pass first time

POST COUPON TODAY FOR FREE RADIO AMATEURS PROSPECTUS
 Please send me my prospectus as quickly as possible.

Mr/Mrs/Miss/Ms _____

Address _____

Postcode _____

RRC The Rapid Results College



Dept. JV115, Tuition House, London SW19 4DS. FREE ADVICE: 081 947 7272 (9am-5pm)
 PROSPECTUS: 081 946 1102 (24 hour Recordcall Service quoting Dept. No. above)

SWM BOOK SERVICE

The books listed have been selected as being of special interest to our readers. They are supplied from our editorial address direct to your door. Some titles are overseas in origin.



HOW TO ORDER

POST AND PACKING; add £1.00 for one book, £2.00 for two or more books, orders over £40 post and packing free, (overseas readers add £1.75 for one book, £3.50 for two or more for surface mail postage) and send a postal order, cheque or international money with your order (quoting book titles and quantities) to **PW Publishing Limited, FREEPOST, Enefc House, The Quay, Poole, Dorset BH15 1PP.** Please make your cheques payable to Short Wave Magazine, payment by Access, Mastercard, Eurocard or Visa also accepted on telephone orders to Poole (0202) 665524. Books are normally despatched by return of post but please allow 28 days for delivery. Prices correct at time of going to press. Please note: all payments must be made in Sterling.

O/P = Out of print, O/S = Out of stock.

NEW BOOKS

AMATEUR RADIO

AN INTRODUCTION TO RADIO WAVE PROPAGATION (BP233)
J.G. Lee

How does the sun and sunspots affect the propagation of the radio waves which are the basis of our hobby? They affect the ionosphere, but differing frequencies are treated differently. Find out how to use charts to predict frequencies that will be the most profitable. What effect will noise have on the signal? Find out with this book. 116 pages. £3.95

AN INTRODUCTION TO VHF/UHF FOR RADIO AMATEURS (BP281)
I.D. Poole An excellent book to go with the new Novice or full callsign. Nine chapters and an appendix deal with all aspects and frequencies from 50 to 1300MHz. 96 pages. £3.50

W1FB'S DESIGN NOTEBOOK
Doug DeMaw W1FB This book is aimed at the non-technical amateur who wants to build simple projects and obtain a basic understanding of amateur electronics. 195 pages. £8.50

ORP CLASSICS
Edited by Bob Schetgen KU7G Operating ORP is fun. This book increases the enjoyment by showing you how to build items that you can be proud of. The can hold their own against the 'Kenyeccom' rig, and come much cheaper too. Extracts from QST and the ARRL handbook, superbly packed in. 274 pages. £9.95

THE SATELLITE EXPERIMENTER'S HANDBOOK 2nd Edition
Martin Ovidoff K2ZUCB The book is divided into four main sections - History, Getting Started, Technical Topics and Appendices. It provides information on spacecraft built by, and for, radio amateurs. In addition, it discusses weather, TV-broadcast and other satellites of interest to amateurs. 313 pages. £14.50

W1FB'S HELP FOR NEW HAMS
Doug DeMaw W1FB This book covers everything from getting acquainted with new equipment to constructing antennas, station layout, interference and operating problems to on-the-air conduct and procedures. 155 pages. £6.95

CONSTRUCTION

COIL DESIGN AND CONSTRUCTION MANUAL (BP160)
B.B. Babani Covering audio to r.f. frequencies, this book has designs for almost

everything. Sections cover such topics as mains and audio output transformers, chokes and r.f. coils. What is the required turns ratio? This book will show you how to find out. Text and tables. 160 pages. £2.50

SIMPLE ELECTRONIC CIRCUIT AND COMPONENTS (BP62)
F.A. Wilson Components, circuits, formulae and radio matters are dealt with in this book. A book to fill in the gaps that appear when taking the RAE or the Novice course. Also eminently suitable for anyone wishing to study at home. 209 pages. £3.50

SHORT WAVE SUPERHET RECEIVER CONSTRUCTION (BP276)
R.A. Penfold A general purpose receiver to build, from antenna to audio, described in understandable English. 74 pages. £2.95

ANTENNAS

ALL ABOUT CUBICAL QUAD ANTENNAS
DWilliam I. Orr W6SAI and Stuart D. Cowan W2LX The quad antenna came into being, and popularity, over 50 years ago. This book shows you how to design build and 'feed' this versatile antenna. If you just want to build one then, there are ready to go designs for bands between 7 and 50MHz. 122 pages. £6.75

THE ANTENNA EXPERIMENTER'S GUIDE
Peter Dodd G3LOO Although written for Radio Amateurs this book will be of interest to anyone who enjoys experimenting with antennas. You only need a very basic knowledge of radio & electronics to get the most from this book. 207 pages. £8.90

FAULT FINDING

MORE ADVANCED TEST EQUIPMENT CONSTRUCTION (BP249)
R.A. Penfold A follow on from *Test Equipment Construction (BP248)* this book looks at digital methods of measuring resistance, voltage, current, capacitance and frequency. Also covered is testing semi-conductors, along with test gear for general radio related topics. 102 pages. £3.50

HOW TO USE OSCILLOSCOPES AND OTHER TEST EQUIPMENT (BP267)
R.A. Penfold Hints and ideas on how to use the test equipment you have, to check out, or fault find on electronic circuits. Many diagrams of typical waveforms and circuits, including descriptions of what waveform to expect with particular faults, or distortion in audio amplifiers. 104 pages. £3.50

LISTENING GUIDE

FERRELL'S CONFIDENTIAL FREQUENCY LIST
Compiled by Geoff Halligey The band 4-28MHz covered in great depth. Who's using what frequency and mode, what's that callsign? These are some of the answers this book will help you find. A very comprehensive book. 390 pages. £17.95

SOUNDS EASY (1991 EDITION)
Compiled by Ken Davies A complete guide to the numerous local radio stations throughout the UK. If you do a lot of travelling this book is invaluable. Itemised by areas, it makes finding you kind of sounds easy. 52 pages. £2.95

AIR TRAFFIC RADIO
1991 Edition Ken Davies Frequencies and abbreviations used in air traffic control throughout the UK. Where to listen for tower, ground and radar control in civilian and other airports. It also includes a small section on off-shore oil related use. 64 pages. £3.95

INTERNATIONAL RADIO STATIONS GUIDE (BP255)
New revision by Peter Shore As in, 'Broadcast Roundup', his column in *P.W.* Peter Shore has laid this book out in world areas. There are sections covering English language transmissions, programs for DXers and swls. Along with sections on European medium wave and UK f.m. stations. 266 pages. £5.95

THEORY

FUTHER PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE (BP144)
F.A. Wilson Contains sections about electrical basics, electrostatics, electromagnetism, mathematics, signal processing and generation, amplifiers, noise distortion and reliability. On the radio front there are sections about e., waves, spectrum matters, receivers, antennas and transmission line calculations. Finally general formulae and conversion factors are given with a short history of electronics squeezed in at the end. 450 pages. £4.95

REFLECTIONS Transmission Lines & Antennas
M.Walter Maxwell W2DU This will help dispel the half-truths and outright myths that many people believe are true about transmission lines, standing waves, antenna matching, reflected power and antenna tuners. 323 pages. £14.50

RADIO

AIR & METEO CODE MANUAL
10th Edition. Joerg Kliffenbusch Detailed descriptions of the World Meteorological Organisation Global Telecommunication System operating FAX and RTTY meteo stations, and its message format with decoding examples. Also detailed description of the Aeronautical Fixed Telecommunication Network amongst others. 289 pages. £15.00

HIGH POWER WIRELESS EQUIPMENT
Articles from *Practical Electricity* 1910-11
Edited by Henry Walter Young A reprint of interesting practical articles from the very early days of radio. 99 pages. £6.85

RADIOTELETYPE CODE MANUAL
10th Edition. Joerg Kliffenbusch This book gives detailed descriptions of the characteristics of telegraph transmission on short waves, with all commercial modulation types including voice frequency telegraphy and comprehensive information on all RTTY systems and c.w. alphabets. 96 pages. £8.00

RESCUE
Paul Beaver & Paul Beriff This book follows the life and conditions of rescue helicopter crews. This is not drama, this is real life and it makes a true impression of the rescuers for the reader. There are transcriptions of airground and between crew dialogues, a summary of the main distress and rescue radio frequencies and helicopter base locations. 192 pages. £9.99

SCANNERS (Third Edition)
Peter Rouse GU1DKD A guide for users of scanning receivers, covering hardware, antennas, accessories, frequency allocations and operating procedures. 245 pages. £8.95

SCANNERS 2
Peter Rouse GU1DKD The companion to *Scanners*, this provides even more information on the use of the v.h.f. and u.h.f. communications band and gives constructional details for accessories to improve the performance of scanning equipment. 216 pages. £9.95

SHORT WAVE RADIO LISTENERS' HANDBOOK
Arthur Miller In easy-to-read and non-technical language, the author guides the reader through the mysteries of amateur, broadcast and CB transmissions. 207 pages. £7.99

WORLDWIDE HF RADIO HANDBOOK
Martyn R. Cooke This book lists high frequencies used by aircraft and aeronautical ground stations. Divided into sections, Military, Civil etc. The book should be easy to use. £6.95

1934 OFFICIAL SHORT WAVE RADIO MANUAL
Edited by Hugo Gernsback A fascinating reprint from a bygone age with a directory of all the 1934 s.w. receivers, servicing information, constructional projects, circuits and ideas on building vintage radio sets with modern parts. 260 pages. £10.15

TELEVISION

A TV-DXERS HANDBOOK (BP176)
R. Burney Information on transmission standards, propagation, receivers including multi-

standard, colour, satellites, antennas, photography, station identification, interference etc. Revised and updated 1986. 87 pages. £5.95

GUIDE TO WORLD-WIDE TELEVISION TEST CARDS
Edition 3. Keith Hamer & Garry Smith Completely revised and expanded, this is a very handy and useful reference book for the DXTV enthusiast. Over 200 photographs of Test Cards, logos, etc., world wide. 60 pages. £4.95

THE ATV COMPENDIUM
Mike Wooding G6IQM This book is for those interested in amateur television, particularly the home construction aspect. There is not a 70cm section as the author felt this is covered in other books. Other fields, such as 3cm TV, are covered in depth. A must for the practical ATV enthusiast. 104 pages. £3.00

SATELLITES

AN INTRODUCTION TO SATELLITE TELEVISION (BP195)
F.A. Wilson Answers all kinds of questions about satellite television. For the beginner thinking about hiring or purchasing a satellite TV system there are details to help you along. For the engineer there are technical details including calculations, formulae and tables. 104 pages. £5.95

SATELLITE TELEVISION A layman's guide
Peter Pearson Pictures from space, that's what satellite television is all about. Orbiting satellites 35 000km high receive TV signals from stations on the earth and retransmit them back again. This book explains all you need to know to set up your own satellite TV terminal at home, dish and accessories, cable and tuner. 73 pages. £1.00

SATELLITE TELEVISION INSTALLATION GUIDE
2nd Edition. John Breeds A practical guide to satellite television. Detailed guidelines on installing and aligning dishes based on practical experience. 56 pages. £11.95

THE SATELLITE BOOK (A complete guide to satellite TV theory and practice)
John Breeds This book deals almost exclusively with television broadcast satellites and is a comprehensive collection of chapters on topics, each written by an expert in that field. It appears to be aimed at the professional satellite system installer, for whom it is invaluable, but it will be appreciated by a much wider audience - anyone interested in satellite technology. 280 pages. £27.00

WEATHER SATELLITE HANDBOOK 4th edition
Or Ralph E. Taggart WB8DQT This book explains all about weather satellites, how they work and how you can receive and decode their signals to provide the fascinating pictures of the world's weather. There are plenty of circuit diagrams and satellite predicting programs. 192 pages. £14.50

THEORY

A BEGINNERS GUIDE TO MODERN ELECTRONIC COMPONENTS (BP285)
R.A. Penfold This book covers a wide range of modern components. The basic functions of the components are described, but this is not a book on electronic theory and does not assume the reader has an in-depth knowledge of electronics. It is concerned with practical aspects such as colour codes, deciphering code numbers and the suitability. 164 pages. £3.95

AUDIO (Elements of electronics - book 6)
F.A. Wilson

This book studies sound and hearing, and examines the operation of microphones, loudspeakers, amplifiers, oscillators, and both disk and magnetic recording. Intended to give the reader a good understanding of the subject without getting involved in the more complicated theory and mathematics. 320 pages. £3.95

EVERYDAY ELECTRONICS DATA BOOK
Mike Tooley BA This book is an invaluable source of information of everyday relevance in the world of electronics. It contains not only sections which deal with the essential theory of electronic circuits, but it also deals with a wide range of practical electronic applications. 290 pages. £8.95

FILTER HANDBOOK A practical design guide
Stefan Niewiadomski A practical book, describing the design process as applied to filters of all types. Includes practical examples and BASIC programs. 155 pages. £25.00

FROM ATOMS TO AMPERES
F.A. Wilson Explains in simple terms the absolute fundamentals behind electricity and electronics. 244 pages. £3.50

PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE (BP53)
F.A. Wilson This has been written as a workshop manual for the electronics enthusiast. There is a strong practical bias and higher mathematics have been avoided where possible. 249 pages. £3.95

SOLID STATE DESIGN FOR THE RADIO AMATEUR
Les Hayward W7ZG and Doug DeMaw W1FB Back in print by popular demand! A revised and corrected edition of this useful reference book covering all aspects of solid-state design. 256 pages. £10.95

THE ARRL ELECTRONICS DATA BOOK
Doug DeMaw W1FB Back by popular demand, completely revised and expanded, this is a handy reference book for the r.f. designer, technician, amateur and experimenter. 260 pages. £8.95

TRANSMISSION LINE TRANSFORMERS
Jerry Sevick W2FMI This is the second edition of this book, which covers a most intriguing and confusing area of the hobby. It should enable anyone with a modicum of skill to make a balun, etc. 270 pages. £13.50

BEGINNERS

AN INTRODUCTION TO RADIO DXING (BP91)
R.A. Penfold How to find a particular station, country or type of broadcast and to receive it as clearly as possible. 112 pages. £1.95

BEGINNER'S GUIDE TO RADIO
9th Edition. Gordon J. King Radio signals, transmitters, receivers, antennas, components, valves and semiconductors, CB and amateur radio are all dealt with here. 266 pages. £8.95

ELECTRONICS SIMPLIFIED - CRYSTAL SET CONSTRUCTION (BP92)
F.A. Wilson Specially written for those who wish to take part in basic radio building. All the sets in the book are old designs updated with modern components. 72 pages. £1.75

THE SIMPLE ELECTRONICS CIRCUIT AND COMPONENTS Book One (BP62)
The aim of this book is to provide an inexpensive but comprehensive introduction to modern electronics.
209 pages £3.50

LISTENING GUIDES

AIR BAND RADIO HANDBOOK (3rd Edition)

David J. Smith
Listen to conversations between aircraft and ground control. The author, an air traffic controller, explains more about this listening hobby. 174 pages £7.50

DIAL SEARCH

1991 Edition. **George Wilcox**
The listener's check list and guide to European broadcasting. Covers m.w., l.w., v.h.f. and s.w., including two special maps. 54 pages £3.95

FLIGHT ROUTINGS 1991

T.T. Williams
Identifies the flights of airlines, schedule, charter, cargo and mail, to and from the UK and Eire and overflights between Europe and America. 104 pages £5.25

GUIDE TO BROADCASTING STATIONS

20th Edition 1989/90. **Philip Darrington**
Frequency and station data, receivers, antennas, Latin American DXing, reporting, computers in radio, etc. 240 pages £10.95

GUIDE TO FACSIMILE STATIONS 11th Edition

Joerg Klingenfuss
This manual is the basic reference book for everyone interested in FAX. Frequency, call sign, name of the station, ITU country/geographical symbol, technical parameters of the emission are all listed. All frequencies have been measured to the nearest 100Hz. 408 pages £16.00

GUIDE TO FORMER UTILITY TRANSMISSIONS

3rd Edition. **Joerg Klingenfuss**
Built on continuous monitoring of the radio spectrum from the sixties until the recent past. A useful summary of the former activities of utility stations providing information for the classification and identification of radio signals. 126 pages £8.00

GUIDE TO UTILITY STATIONS

9th Edition. **Joerg Klingenfuss**
This book covers the complete short wave range from 3 to 30MHz together with the adjacent frequency bands from 0 to 150kHz and from 1.6 to 3MHz. It includes details on all types of utility stations including FAX and RTTY. There are 15802 entries in the frequency list and 3123 in the alphabetical call sign list plus press services and meteorological stations. 502 pages £19.00

HF OCEANIC AIRBAND COMMUNICATIONS

3rd Edition. **Bill Laver**
HF aircraft channels by frequency and band, main ground radio stations, European R/T networks and North Atlantic control frequencies. 31 pages £3.95

MARINE UK RADIO FREQUENCY GUIDE

Bill Laver
A complete guide to the UK s.w. and v.h.f. marine radio networks. Useful information, frequency listings and the World Marine Coastal Phone Stations. 62 pages £4.95

NEWNES SHORT WAVE LISTENING HAND BOOK

Joe Pritchard GU0W
A technical guide for all short wave listeners. Covers construction and use of sets for the s.w.l. who wants to explore the bands up to 30MHz. 288 pages £12.95

RADIO LISTENER'S GUIDE 1991

Clive Woodyear
This is the third edition of the essential guide for all radio listeners. Simple-to-use maps and charts show the frequencies for all the radio stations in the UK. When travelling or at home, the guide gives you all the frequencies you'll ever need. 56 pages £2.95

THE COMPLETE VHF/UHF FREQUENCY GUIDE

1991 Edition.
This book gives details of frequencies from 26-2250MHz with no gaps and who uses what. Recently updated, there are chapters on equipment requirements as well as antennas, etc. 88 pages £5.95

THE INTERNATIONAL VHF FM GUIDE

7th Edition. **Julian Baldwin G3UHK and Kris Partridge G8AUU**
The latest edition of this useful book gives concise details of repeaters and beacons worldwide plus coverage maps and further information on UK repeaters. 79 pages £2.85

THE POCKET GUIDE TO RTTY AND FAX STATIONS

Bill Laver
A handy reference book listing RTTY and FAX stations, together with modes and other essential information. The listing is in ascending frequency order, from 1.6 to 27.1MHz. 60 pages £3.95

SHORT WAVE LISTENERS CONFIDENTIAL FREQUENCY LIST

Bill Laver
Covering the services and transmission modes that can be heard on the bands between 1.635 and 29.7MHz. £8.95

WORLD RADIO TV HANDBOOK 1991

Country-by-country listings of l.w., m.w. & s.w. broadcast and TV stations. Receiver test reports. English language broadcasts. The s.w.l.'s bible. 576 pages £17.95

INTERFERENCE

INTERFERENCE HANDBOOK (USA)

William R. Nelson WA6FG
How to locate and cure r.f.i. for radio amateurs, CBers and TV and stereo owners. 253 pages £9.50

RADIO FREQUENCY INTERFERENCE (USA)

What causes r.f.i.? Are all r.f.i. problems difficult, expensive and time-consuming to cure? These questions and many more are answered in this book. 84 pages £4.30

AMATEUR RADIO

ALL ABOUT VHF AMATEUR RADIO (USA)

W. I. Orr W6SAI
VHF/UHF propagation, including moonbounce and satellites, equipment and antennas. 172 pages £9.50.

AMATEUR RADIO CALL BOOK (RSGB)

1991 Edition
Now incorporates a 122-page section of useful information for amateur radio enthusiasts. 429 pages £7.20

AMATEUR RADIO SATELLITES the first 25 years

Arthur C. Gee G2UK
This souvenir publication is mainly a pictorial account of the pattern of developments which have occurred over the last 25 years in amateur radio satellite operations. 34 pages £2.25

AN INTRODUCTION TO AMATEUR COMMUNICATIONS SATELLITES BP290

A. Fickard
This book describes several currently available systems, their connection to an appropriate computer and how they can be operated with suitable software. 102 pages £3.95

AN INTRODUCTION TO AMATEUR RADIO (BP257)

I. D. Poole
This book gives the newcomer a comprehensive and easy to understand guide through amateur radio. Topics include operating procedures, jargon, propagation and setting up a station. 150 pages £3.50

HINTS AND KINKS FOR THE RADIO AMATEUR

Edited by **Charles L. Hutchinson and David Newkirk**
A collection of practical ideas gleaned from the pages of QST magazine. 152 pages £4.95

HOW TO PASS THE RADIO AMATEURS' EXAMINATION (RSGB)

Clive Smith G4FZH and George Benbow G3HB
The background to multiple choice exams and how to study for them with sample RAE papers for practice plus maths revision. 88 pages £6.70

PASSPORT TO AMATEUR RADIO

Reprinted from *PW* 1981-1982
The famous series by GW3JGA, used by thousands of successful RAE candidates in their studies. Plus other useful articles for RAE students. 96 pages £1.50

PRACTICAL GUIDE TO PACKET OPERATION IN THE UK

Mike Mansfield G6AWD
Introduces the concept of packet radio to the beginner. Problem areas are discussed and suggestions made for solutions to minimise the problems. Deals with the technical aspects of packet taking the reader through setting up and provides a comprehensive guide to essential reference material. 91 pages £6.95

PRACTICAL IDEAS FOR RADIO AMATEURS

Ian Peale G3YWX
Offers a wealth of hints, tips and general practical advice for all transmitting amateurs and short wave listeners. 128 pages £5.95

RADIO AMATEUR CALLBOOK NORTH AMERICAN LISTINGS 1991

69th Edition
Listings of US amateurs (including Hawaii). Also contains standard time chart, census of amateur licences of the world, world-wide QSL bureau and much more. Over 1400 pages £19.50

RADIO AMATEUR'S GUIDE TO RADIO WAVE PROPAGATION

(HF Bands). **F. C. Judd G2BCX**
The how and why of the mechanism and variations of propagation in the h.f. bands. 144 pages £10.95

THE 1991 ARRL HANDBOOK FOR THE RADIO AMATEUR

This is the 66th edition of this very useful handbook reference book. Updated throughout it has several new sections covering oscilloscopes, spectrum analysers, digital frequency synthesis, phase-noise measurement and new construction projects. 1200 pages. 0/P

THE ARRL OPERATING MANUAL

Another very useful book from the ARRL. Although written for the American radio amateur, this book will also be of use and interest to the UK amateur. 684 pages £12.95

THE ARRL SATELLITE ANTHOLOGY

The best from the Amateur Satellite News column and articles out of 31 issues of QST have been gathered together in this book. The latest information on OSCARs 9 through 13 as well as the RS satellites is included. Operation on Phase 3 satellites (OSCAR 10 and 13) is covered in detail. 97 pages £5.95

THE ARRL UHF/MICROWAVE EXPERIMENTER'S MANUAL

Various Authors
A truly excellent manual for the keen microwave enthusiast and for the budding 'microwaver'. With contributions from over 20 specialist authors. Chapters covering techniques, theory, projects, methods and mathematics. 446 pages £14.50

THE COMPLETE DX'ER

Bob Locher W9KNI
Now back in print, this book covers equipment and operating techniques for the DX chaser, from beginner to advanced. 187 pages £7.95

THE RADIO AMATEUR'S DX GUIDE (USA)

15th Edition
The guide contains information not easily obtained elsewhere and is intended as an aid and quick reference for all radio amateurs interested in DX. 38 pages £2.95

THE RADIO AMATEUR'S QUESTIONS & ANSWER REFERENCE MANUAL

4th Edition. **R. E. G. Petri G8CCJ**
This book has been compiled especially for students of the City and Guilds of London Institute RAE. It is structured with carefully selected multiple choice questions, to progress with any recognised course of instruction, although is not intended as a text book. 280 pages £7.95

THE RAE MANUAL (RSGB)

G.L. Benbow G3HB
The latest edition of the standard aid to studying for the Radio Amateurs' Examination. Updated to cover the latest revisions to the syllabus. 132 pages £6.70

YOUR GATEWAY TO PACKET RADIO

Stan Horzepa WA1LOU
What is packet radio good for and what uses does it have for the 'average' amateur? What are protocols? Where, why, when? Lots of the most asked questions are answered in this useful book. It included details of networking and space communications using packet. 278 pages £8.95

MAPS

IARU LOCATOR MAP OF EUROPE

DARC
This multi-coloured, plastics laminated, map of Europe shows the AIRU ("Maidenhead") Locator System. Indispensable for the v.h.f. and u.h.f. OXer. 692 x 872mm £2.25

NORTH ATLANTIC ROUTE CHART

This is a five-colour chart designed for the use of ATC in monitoring transatlantic flights. Supplied folded. 740 x 520mm £4.50

RADIO AMATEUR'S MAP OF NORTH AMERICA (USA)

Shows radio amateur prefix boundaries, continental boundaries and zone boundaries. 760 x 636mm £3.50

RADIO AMATEUR'S PREFIX MAP OF THE WORLD (USA)

Showing prefixes and countries, plus listings by order of country and of prefix. 1014 x 711mm £3.50

RADIO AMATEUR'S WORLD ATLAS (USA)

Seventeen pages of maps, including the world-polar projection. Also includes the table of allocation of international call sign series. £4.50

DATA REFERENCE

DIGITAL IC EQUIVALENTS AND PIN CONNECTIONS (BP140)

A. Michaels
Equivalents and pin connections of a popular selection of European, American and Japanese digital i.c.s. 256 pages £5.95.

INTERNATIONAL TRANSISTOR EQUIVALENTS GUIDE (BP85)

A. Michaels
Possible substitutes for a popular selection of European, American and Japanese transistors. 320 pages £3.95

NEWNES AUDIO & HI-FI ENGINEER'S POCKET BOOK

Vivian Capel

This is a concise collection of practical and relevant data for anyone working on sound systems. The topics covered include microphones, gramophones, CDs to name a few. 190 pages. **Hardback £10.95**

NEWNES COMPUTER ENGINEER'S POCKET BOOK

This is an invaluable compendium of facts, figures, circuits and data and is indispensable to the designer, student, service engineer and all those interested in computer and microprocessor systems. 203 pages. **Hardback £10.95**

NEWNES ELECTRONICS POCKET BOOK

5th Edition
Presenting all aspects of electronics in a readable and largely non-mathematical form for both the enthusiast and the professional engineer. 315 pages. **Hardback £10.95**

NEWNES RADIO AMATEUR AND LISTENER'S POCKET BOOK

Sieve Mokesy G3FZX
This book is a collection of useful and intriguing data for the traditional and modern amateur s.w.l. as well as the s.w.l. Topics such as AMTOR, packet radio, SSTV, computer communications and maritime communications are all covered. 160 pages. £9.95

NEWNES RADIO AND ELECTRONICS ENGINEER'S POCKET BOOK

18th Edition. **Keith Brindley**
Useful data covering math, abbreviations, codes, symbols, frequency bands/allocations, UK broadcasting stations, semi-conductors, components, etc. 325 pages. **Hardback £9.95**

POWER SELECTOR GUIDE (BP235)

J. C. J. Van de Ven
This guide has the information on all kinds of power devices in useful categories (other than the usual alpha numeric sort) such as voltage and power properties making selection of replacements easier. 180 pages £4.95

CONSTRUCTION

HOW TO DESIGN AND MAKE YOUR OWN PCBs (BP121)

R. A. Penfold
Designing or copying printed circuit board designs from magazines, including photographic methods. 80 pages £2.50

INTRODUCING QRP

Collected articles from *PW* 1983-1985
An introduction to low-power transmission (QRP). This book includes full constructional details of a variety of designs by Rev. George Dobbs G3RJV for transmitters and transceivers covering Top Band to 14MHz, together with test equipment by Tony Smith G4FAI. 64 pages. £1.50

MORE ADVANCED POWER SUPPLY PROJECTS (BP192)

R. A. Penfold
The practical and theoretical aspects of the circuits are covered in some detail. Topics include switched mode power supplies, precision regulators, dual tracking regulators and computer controlled power supplies, etc. 92 pages £2.95

POWER SUPPLY PROJECTS (BP76)

R. A. Penfold
This book gives a number of power supply designs including simple unregulated types, fixed voltage regulated types and variable voltage stabilised designs. 91 pages £2.50

PRACTICAL POWER SUPPLIES

Collected articles from *PW* 1978-1985
Characteristics of batteries, transformers, rectifiers, fuses and heatsinks, plus designs for a variety of mains driven power supplies, including the *P.W. "Marchwood"* giving a fully stabilised and protected 12V 30A d.c. 48 pages. £1.25

QRP NOTEBOOK

Doug DeMaw W1FB
This book deals with the building and operating of a successful QRP station. Lots of advice is given by the author who has spent years as an ardent QRP'er. All the text is easy-to-read and the drawings large and clear. 77 pages. £4.95

TEST EQUIPMENT CONSTRUCTION (BP248)

R.A. Penfold
Describes, in detail, how to construct some simple and inexpensive, but extremely useful, pieces of test equipment. 104 pages £2.95

50 (FET) FIELD EFFECT TRANSISTOR PROJECTS (BP39)

F.G. Rayer
50 circuits for the s.w.l., radio amateur, experimenter or audio enthusiast using 1e1s. 104 pages. £2.95

ANTENNAS (AERIALS)

ALL ABOUT VERTICAL ANTENNAS (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX
Theory, design, construction, operation, the secrets of making vertical work. 191 pages. £8.50

AN INTRODUCTION TO ANTENNA THEORY (BP198)

H. C. Wright
This book deals with the basic concepts relevant to receiving and transmitting antennas. Lots of diagrams reduce the amount of mathematics involved. 86 pages. £2.95

ANTENNA IMPEDANCE MATCHING

Wilfred N. Caron
Proper impedance matching of an antenna to a transmission line is of concern to antenna engineers and to every radio amateur. A properly matched antenna as the termination for a line minimises feed-line losses. Power can be fed to such a line without the need for a matching network at the line input. There is no mystique involved in designing even the most complex multi-element networks for broadband coverage. Logical step-by-step procedure is followed in this book to help the radio amateur with this task. 192 pages £11.95

BEAM ANTENNA HANDBOOK (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX
Design, construction, adjustment and installation of h.f. beam antennas. 198 pages. £7.50

NDVICE ANTENNA NOTEBOOK

Doug DeMaw W1FB
Another book from the pen of W1FB, this time offering "new ideas for beginning hams". All the drawings are large and clear and each chapter ends with a glossary of terms. 130 pages £6.95

OUT OF THIN AIR

Collected Antenna Articles from *PW* 1977-1980
Including such favourites as the ZL Special and 2BCX 16-element beams for 2m, and the famous "Slim Jim" designed by Fred Judd G2BCX. Also features systems for Top Band, medium wave/long wave loop designs and a v.h.f. direction finding loop. Plus items on propagation, accessories and antenna design. 80 pages £1.80

SIMPLE, LOW-CDST WIRE ANTENNAS FOR RADIO AMATEURS (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX
Efficient antennas for Top Band to 2m, including "invisible" antennas for difficult station locations. 191 pages. £7.50

THE ARRL ANTENNA BOOK (USA) 16th Edition

A station is only as effective as its antenna system. This book covers propagation, practical constructional details of almost every type of antenna, test equipment and formulas and programs for beam heading calculations. £14.50

Turn to page 76 for more books.



THE ARRL ANTENNA COMPENDIUM (USA)

Volume One
Fascinating and hitherto unpublished material. Among the topics discussed are quads and loops, log periodic arrays, beam and multi-band antennas, verticals and reduced size antennas. 175 pages. £9.50

THE ARRL ANTENNA COMPENDIUM (USA)

Volume Two
Because antennas are a topic of great interest among radio amateurs, ARRL HQ continues to receive many more papers on the subject than can possibly be published in QST. Those papers are collected in this volume. 208 pages. £9.50

THE RADIO AMATEUR ANTENNA HANDBOOK

William I. Orr W6SAI & Stuart, D. Cowan W2LX
Yagi, quad, quagi, l-p, vertical, horizontal and "sloper" antennas are all covered. Also towers, grounds and rotators. 190 pages. £6.75

W1FB'S ANTENNA NOTEBOOK

Doug DeMaw W1FB
This book provides lots of designs, in simple and easy to read terms, for simple wire and tubing antennas. All drawings are large and clear making construction much easier. 124 pages. £6.95

WIRES & WAVES

Collected Antenna Articles from PW 1980-1984
Antenna and propagation theory, including NBS Yagi design data. Practical designs for antennas from medium waves to microwaves, plus accessories such as a u.s. swr and power meters and a noise bridge. Dealing with TVI. 160 pages. £3.00

25 SIMPLE AMATEUR BAND AERIALS (BP125)

E. M. Noll. How to build 25 simple and inexpensive aerials, from a simple dipole

through beam and triangle designs to a mini-rhombic. Dimensions for specific spot frequencies including the WARC bands. 80 pages. £1.95

25 SIMPLE INDOOR AND WINDOW AERIALS (BP136)

E. M. Noll. Designs for people who live in flats or have no gardens, etc., giving surprisingly good results considering their limited dimensions. 64 pages. £1.75

25 SIMPLE SHORT WAVE BROADCAST BAND AERIALS (BP132)

E. M. Noll. Designs for 25 different aerials, from a simple dipole through helical designs to a multi-band umbrella. 80 pages. £1.95

25 SIMPLE TROPICAL AND MW BAND AERIALS (BP145)

E. M. Noll. Simple and inexpensive aerials for the broadcast bands from medium wave to 49m. 64 pages. £1.75

FAULT FINDING

ARE THE VOLTAGES CORRECT?

Reprinted from PW 1982-1983
How to use a multimeter to fault-find on electronic and radio equipment, from simple resistive dividers through circuits using diodes, transistors, i.c.s and valves. 44 pages. £1.50

GETTING THE MOST FROM YOUR MULTIMETER (BP239)

R. A. Penfold
This book is primarily aimed at beginners. It covers both analogue and digital multimeters and their respective limitations. All kinds of testing is explained too. No previous knowledge is required or assumed. 102 pages. £2.95

MORE ADVANCED USES OF THE MULTIMETER (BP265)

R. A. Penfold
This book is primarily intended as a follow-up to BP239. Getting the most from your Multimeter. By using the techniques described in this book you can test and analyse the performance of a range of components with just a multimeter (plus a very few inexpensive components in some cases). The simple add-ons described

extend the capabilities of a multimeter to make it even more useful. 85 pages. £2.95.

OSCILLOSCOPES, HOW TO USE THEM, HOW THEY WORK 3rd Edition

Ian Hickman
This book describes oscilloscopes ranging from basic to advanced models and the accessories to go with them. £14.95

TRANSISTOR RADIO FAULT FINDING CHART (BP70)

C. E. Miller
Used properly, should enable most common faults to be traced reasonably quickly. Selecting the appropriate fault description at the head of the chart, the reader is led through a sequence of suggested checks until the fault is cleared. 635 x 455mm (approx). £0.95

COMPUTING

AN INTRODUCTION TO COMPUTER COMMUNICATIONS (BP177)

R. A. Penfold
Details of various types of modem and their applications, plus how to interconnect computers, modems and the telephone system. Also networking systems and RTTY. 96 pages. £2.95

MORSE

INTRODUCING MORSE

Collected Articles from PW 1982-1985
Ways of learning the Morse Code, followed by constructional details of a variety of keys including lambic, Triambic, and an Electronic Bug with a 528-bit memory. 48 pages. £1.25

THE SECRET OF LEARNING MORSE CODE

Mark Francis
Designed to make you proficient in Morse code in the shortest possible time, this book points out many of the pitfalls that beset the student. 87 pages. £4.95

YORKSHIRE

Alan Hooker Radio Communications

42 Netherhall Road, Doncaster.
Tel: (0302) 325690 Open: Mon-Sat 10-5pm
Closed Thursdays.

Kenwood
YAESU
ICOM
& most
Scanners

G2VF LOOP ANTENNAS WITH ATU FOR HF HAM BAND TRANSMISSION
(SWR One to One 40, 15 and 10 One Point Five to One 80 and 20) **AND SWLs LONG AND MEDIUM WAVE FOR BCLs.** Loops 21 inches square or triangle. No special skills required. Circuits, Parts Lists sources of supply assembly data. HIGH FREQUENCY LOOP 80 to 10 Metres £5. LONG AND MEDIUM WAVE LOOP FOR BCLs £3. LONG MEDIUM SHORT WAVE LOOP 1500 to 10 METRES FOR BCL SWL £8. SHORT WAVE ATU LOOP OR LONG WIRE £4. PRE AMP LW MW S WAVE £2. PHOTOCOPY HRO MANUAL £4. MW LOOP WITH PRE AMP ATU £3. PRE AMP FOR G2VF HF LOOP OR ATU £4. SHORT WAVE ATU BUILT-IN PRE AMP FOR LOOP OR LONG WIRE £7. SAE details. All projects D.I.Y. METAL DETECTOR £2. **F. G. Rylands, 39 Parkside Avenue, Millbrook, Southampton SO1 9AF. Tel: (0703) 775064.**

IBM PC SOFTWARE

RTTY, AMTOR, CW (Tx and Rx) SSTV, **BY G4BMK**
FAX, Audio Analyser (RX only). See review PW June 1990 Page 66. A high performance multimode program for IBM PC compatibles, £80 complete. Any mix of modes to your choice - send SAE for details and prices.

ATARI ST

RTTY, AMTOR, CW and Analyser for Atari ST/STE works with hi-res or medium res display. £49. Printed manual £5. Use with ST5 Versaterm etc. or our matching built T.U. £56.
State callsign, if any, and disk size with order. Add £1 P&P.

GROSVENOR SOFTWARE (SWM)

2 Beacon Close, SEAFORD, East Sussex,
BN25 2JZ Tel: (0323) 893378

HIGH POWER TRANSMITTER VALVES

Klystrons, Magnetrons, 4CX350A, 4CCX1000A, 4CX250B QY3-125, QY4-250, etc. One million valves in stock. Phone or fax for quote, discounts for large value inquiries. Orders from manufacturers, Govt. Depts., overseas etc., welcome. **WANTED VALVES ESP. KT66, KT88, PX4, PX25, Klystrons, Magnetrons, Transistors, I.C.s.** If possible send wiring list - we reply same day. Cash waiting.

BILLINGTON EXPORT, Oakdene Industrial Estate, Near Horsham RH13 8AZ.
Callers by appointment only. Tel: (0403) 865105 FAX: (0403) 865106. Minimum order £50 (UK/export) + VAT.

ALL VALVES & TRANSISTORS

Phone for a most courteous quotation
081-743 0899

We are one of the largest stockists of valves etc, in the U.K.

COLOMOR (ELECTRONICS) LTD. 17D GOLDHAWK ROAD
LONDON W12 8HJ

AOR UK 22	ARE 60	ASK 68	Aerial Techniques 73	Air Supply 70	Alyntronics 71	Amateur Radio Comms 46	Amdat 33	Audio Video Care 29	Billington Valves 76	Bredhurst Electronics 66	Chevet Books 71	Colomor Electronics 76	Comar 72	Datong 45	Dewsbury 29	Dressler Communications 66	INDEX TO ADVERTISERS	Radio Research 70	Radio Shack 78	Rapid Results College 73	Raycom 60	Rylands, F G 76	SRP Trading 69	Sigma UK 46	Solid State Electronics 72	South Midlands Communications 26	Stephens James 59	Technical Software 78	Timestep 71	Waters & Stanton 19
EMP 67	ERA 77	Elliott Electronics 54	Flightdeck 73	Flying Shop, The 46	Garex Electronics 71	Grosvenor Software 76	Hooker, Alan 76	Howes C.M Communications ... 77	ICS Electronics 25	Icom (UK) 2, 3, Cover iii	Interbooks 45	J & P Electronics 72	Javiation 59	Klingenfuss 77	Lake Electronics 73	Link Electronics 72	Lowe Electronics 70	Martelec 29, 45	Martin Lynch 13	Medium Wave Circle 70	Nevada Cover i, 20, 21	PWP Limited 78	Photo Acoustics 55	Practical Wireless 70	R & D Electronics 73	RGW Electronics 70				

PUBLISHED on the fourth Thursday of each month by PW Publishing Ltd., Enefco House, The Quay, Poole, Dorset BH15 1PP. Printed in England by Blackmore Press, Shaftesbury, Dorset. Tel: 0747 53034. Distributed by Seymour, Windsor House, 1270 London Road, Norbury, London SW16 4DH, Tel: 081-679 1899, Fax: 081-679 8907, Telex: 881245. Sole Agents for Australia and New Zealand - Gordon and Gotch (Asia) Ltd., South Africa - Central News Agency Ltd. Subscriptions INLAND £21.00, EUROPE £23, OVERSEAS (by ASP) £25, payable to SHORT WAVE MAGAZINE, Subscription Department, PW Publishing Ltd., Enefco House, The Quay, Poole, Dorset BH15 1PP. SHORT WAVE MAGAZINE is sold subject to the following conditions, namely that it shall not, without the written consent of the publishers first having been given, be lent, re-sold, hired out or otherwise disposed of by way of trade at more than the recommended selling price shown on the cover, and that it shall not be lent, re-sold, hired out or otherwise disposed of in a mutilated condition or in any unauthorised cover by way of Trade, or affixed to or as part of any publication or advertising, literary or pictorial matter whatsoever.

GUIDE TO FACSIMILE STATIONS

11th Edition • 408 Pages • £19 or DEM 50

The recording of FAX stations on LW and SW and the reception of meteo satellites are fascinating fields of radio monitoring. State-of-the-art hard and software connects a radio receiver directly to a laser printer. The result is top quality press photos, satellite pictures and weather charts.

The new edition of our FAX GUIDE contains not only the usual up-to-date frequency lists and transmission schedules of all stations worldwide, it informs you particularly about new FAX converters and programs on the market, and includes the most comprehensive international survey of the "products" of weather satellites and FAX stations from all over the world. 312 sample charts and pictures were recorded in 1990 and 1991. There are special charts for aeronautical and maritime navigation, agriculture and the military, barographic soundings, climatological analyses, and long-term forecasts, which are available nowhere else.

Additional chapters cover:

- List of 341 frequencies monitored in 1990 and 1991.
- Exact schedules of 86 FAX stations on 313 frequencies.
- Geostationary and polar-orbiting meteo satellites. Schedules of GMS (Japan), GOES-East and West (USA), and METEOSAT (Europe).
- Technique of FAX transmission. International regulations.
- Lists of abbreviations, addresses, and call-signs. Test charts.

Further publications available are *Guide to Utility Stations* (9th ed.), *Air and Meteo Code Manual* and *Radio-teletype Code Manual* (11th ed.).

We have published our international radio books for 22 years. They are in daily use by equipment manufacturers, monitoring services, radio amateurs, shortwave listeners and telecommunication administrations worldwide. Please ask for our free catalogue, including recommendations from all over the world. For a *Decode* book review see SWM 8/90. All manuals are published in the handy 170 x 240mm format, and of course written in English.

Do you want to get the **total information** immediately? For the special price of £84/DEM 235 (you save £15/DEM40) you will receive all our manuals and supplements (altogether more than 1600 pages!) plus our **Cassette Tape Recording of Modulation Types**.

Our prices **include airmail** postage to anywhere in the world. Payment can be by £ or DEM cheque, cash, International Money Order, or post giro (account Stuttgart 2093 75-709). Dealer enquiries welcome - discount rates and pro forma invoices on request. Please mail your order to

Klingenfuss Publications

Hagenloher Str. 14
D-7400 Tuebingen
Germany

Tel: ++ 49 7071 62830

ENTERPRISE RADIO APPLICATIONS LTD.

5 Clarendon Court
Winwick Quay
Warrington
WA2 8QP
Tel: (0925) 573118

MK.II MICROREADER




The easiest way to receive CW & RTTY without all the fuss of computers. Just plug into your speaker socket and switch on. The Microreader automatically decodes both amateur and commercial stations displaying the received text on its own LCD screen. The Microreader also incorporates a MORSE TUTOR facility that allows you to check both your receiving and sending performance. £170.00

BP34 AUDIO FILTER

Someone once said that this filter is too good for amateur radio use. We, along with hundreds of BP34 users would disagree. The BP34 combines ease of use with a degree of performance not found in any other filter. Exceptionally sharp cut off and guaranteed 80dB stopband attenuation make this filter a must for the more serious user. £109.50

RS232 DISPLAY

Don't tie up your computer while monitoring. This new unit will display, store and print messages sent via the RS232 output from the MICROREADER or PACKET TNC. Text is stored in memory and at the same time displayed on the large 160 character backlit screen. A unique scrolling facility allows you at any time to scroll back and forth through over fifty screens of text messages while still receiving data. The display incorporates a PARALLEL PORT that allows printing of all or selected sections of text at the touch of a button. £185.00



BP12 DATA FILTER

A compact low power filter specifically designed for data applications such as CW, RTTY & HF PACKET. Both audio and TTL tone data outputs are provided. Ideal for use with computers. £44.00


All products are guaranteed for two years and all prices include VAT and postage and packing.



C.M.HOWES COMMUNICATIONS

Mail order to:

EYDON, DAVENTRY
NORTHANTS NN11 6PT
Tel: (0327) 60178

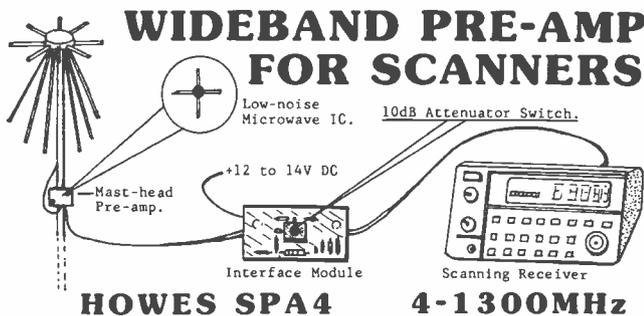

The **HOWES SPA4** wide-band pre-amplifier is designed to add extra gain to passive antennas (discone, nested dipoles etc.). The low noise combined with at least 15dB of gain over the whole frequency range overcomes the losses in the antenna's down lead, and adds extra sensitivity to the scanning receiver.

The SPA4 uses advanced technology adapted from our very popular AA4 active antenna. Now you can add this extra performance to your discone!

- ★ Fully broad-band covering 4 to 1300MHz
- ★ Low noise microwave IC (NF <3dB). Over 15dB gain. IP3 +15dBm.
- ★ Coax powered pre-am. 12 to 14V DC at less than 20mA.
- ★ 10dB switched attenuator on the receiver interface board.
- ★ Pre-amp only 40 by 28mm. Easy-to-build kit or ready-built modules.

If you would like to improve your scanner reception, and you already own a passive broadband antenna, then the **HOWES SPA4** could be just what you need to boost those weak signals.

SPA4 kit: £14.90 **Assembled PCB modules:** £20.90
Weatherproof (IP65) case for outdoor pre-amp mounting: £6.90

AA4 ACTIVE ANTENNA for scanners. The **HOWES AA4** Active antenna gives full coverage from 25 to 1300MHz in a neat compact unit. The answer to antenna space/visibility problems for home, holiday and portable operation. Reviewed in the November '90 *Short Wave Magazine*. Excellent performance in a small space!

AA4 Kit: £19.80 **Assembled PCB modules:** £26.80

RECEIVER KITS

		KITS	Assembled PCB
DXR10	3 Band (10,12 & 15m) for DX amateur work	£26.60	£39.90
DcRx54	5.4MHz HF Aircraft band (rescue etc)	£15.90	£22.70
DcRx20, 40 or 80m	Single band amateur receivers	£15.90	£22.70
TRF3	Simple Shortwave Broadcast receiver (TRF)	£15.50	£21.70

RECEIVER ACCESSORIES

AA2	150kHz to 30MHz active antenna	£8.50	£12.90
ASL5	Externally fitted SSB and CW audio filter	£15.90	£24.60
CSL4	Extra SSB/CW filtering for our receivers	£10.50	£17.40
CTU30	All HF bands and 6M ATU (up to 30W TX)	£31.50	£38.40
CV100	HF to VHF converter for scanners	£26.50	£37.90
CBA2	Buffer for adding counter to our SSB/CW RXs	£5.90	£9.50
DFD5	Digital frequency counter/display	£41.50	£64.50
DCS2	"S meter" for our receiver kits	£9.20	£13.80
XM1	Crystal frequency calibrator (8 markers)	£16.90	£22.80



TRANSMITTERS AND HARDWARE

All our amateur band receivers can be combined with a matching transmitter kit and accessories to form a transceiver. Your home-brew rig could look like the one in the picture with our new "M Series" hardware packages.

PLEASE ADD £1.20 P&P to your total order value (£3.00 for hardware).

HOWES KITS are produced by a professional RF design and manufacturing company. They contain a good quality printed circuit board with screen printed parts locations, full clear instructions and all board mounted components. Sales and technical advice are available by phone during office hours. Please send an SAE for our free catalogue or specific product data.

73 from Dave G4KQH, Technical Manager

SERVICE MANUALS

BUSH

BC6240 Svc Man	CTV	1.50
BRC 200 Series Svc Man	CTV	3.50
BC6468 Svc Man	CTV	1.50

TECHNICS

SL-P1 Svc Man	CD Player	2.00
SL-P8 Svc Man	CD Play	2.00
SL-QD2 Svc Man	Turn	1.00
SL-BD3 Svc Man	Turn	1.00
SL-J1 Svc Man	Turn	1.00

SANYO

CTP370/371 Svc Man	CTV	1.50
CTP430/431 Svc Man	CTV	1.50
CTP1101 Svc Man	CTV	1.50
CTP6131 Svc Man	CTV	1.00
CTP6130 Svc Man	CTV	1.00

PHILIPS

N1512 Svc Man	VCR	4.00
611 Chassis Field Svc info	CTV	2.50
37 KT 2060 Svc Man	CTV	0.50
520 Series Svc Man	CTV	3.00
VR2075 Svc Man	CTV	3.50
VR2340 Svc Man	VCR	3.50
VR6462.PPF Svc Man	VCR	3.00

PYE

176 Svc Man	MTV	1.00
CT 70171 Svc Man	CTV	2.50
KT3 Chassis Svc Man	CTV	3.00
System 4 Tech Svc Man	CTV	10.00

PANASONIC

NV788 Svc Hints	VCR	1.50
NV788 Svc Man	VCR	3.50
NV788 Training Man	VCR	2.00
NV2000 Svc Man	VCR	3.50
TC2203 Svc Man	CTV	2.50
TC2207 Svc Man	CTV	2.00

GRUNDIG

2222 Svc Man	CTV	2.50
2252 Svc Man	CTV	2.50
4210 Svc Man	CTV	2.00
4220 Svc Man	CTV	2.50
4230 Svc Man	CTV	2.00
8240 Svc Man	CTV	3.00
9260 Svc Man CTV	3.00	
5011 Svc Man	CTV	1.50
5011UE/GB Svc Man	CTV	1.50
R500GB Svc Man	MTV	1.00
6010 Svc Man	CTV	1.50

DECCA

37 Series Svc Man	CTV	1.00
80 Series SvcMan	CTV	1.00
C20307 Svc Man	CTV	1.00
C26306 Svc Man	CTV	1.00
DS9000 Svc Man	Stereo CTR	1.50
Descant PR207 Svc DataPort Rad		0.50

ABBREVIATIONS

RAD	Radio
MTV	Mono TV
Turn	Turntable
Svc	Service
Man	Manual
Port	Portable
CTV	colour TV
T/T	Teletext
Dir/drv	Direct Drive
Sys	System
CTR	Cassette Tape Recorder

Payment or part payment with stamps is accepted to a maximum value of 99p. No single stamp over 24p please.

We have lots more available from manufacturers, Hitachi, Dynatron, Ferguson, ITT, Mitsubishi, Murphy, Radio Mobile, Sharp and Thorn. From 50p each. For full list, send 7" x 5" and SAE to address below. (Please allow 28 days for delivery.)

Postal Orders and Cheques made payable to:

PWP LTD

Box No. 21, Enefco House, The Quay, POOLE, Dorset BH15 1PP

NEW

FAX and WEATHER SATELLITES

Full resolution charts and greyscale pictures from any SPECTRUM computer to a dot matrix printer. Basic system £40 plus interface for FAX £40 or WX SATS £59.

APT-1 WEATHER SATELLITE MODULE

Enables all weather satellite signals to be displayed on any FAX system. Plugs into RX-8 system direct. £59 or £39 if ordered with RX-8.

RX-8 8 - MODE RECEIVE

Every possible feature and performance to receive FAX, HF & VHF PACKET, COLOUR SSTV, RTTY, CW, AMTOR, UoSAT and ASCII on any BBC computer. Reviews Oct. 89 Ham Radio Today and July 91 Rad Comm. Complete system of EPROM, interface, instructions, leads and demo cassette £259.

RX-4 RTTY CW SSTV AMTOR RECEIVE

Performance, features and ease of use make this still a best seller. Needs TIF1 interface. BBC, CBM64 tape £25, disk £27. VIC20 tape £25. SPECTRUM tape £40, + 3 disk £42 inc adaptor board (needs TIF1 also) or software-only version £25. TIF 1 INTERFACE has 4-pole filtering and computer noise isolation for excellent HF and VHF performance. Kit £30, ready-made, boxed with all connections £40. Available only with software.

Also MORSE TUTOR £8, LOGBOOK £8, RAE MATHS £8 for BBC, CBM64, VIC20 and SPECTRUM. BBC LOCATOR with UK, Europe, World maps £10. Disk £2 extra for all.

Lots of information available about everything, please ask. Prices include VAT and p&p by return.



technical software (SWM)



Fron, Upper Llandwrog, Caernarfon LL54 7RF
Tel: (0286) 881886

RADIO SHACK

Short Wave Receivers

All of the equipment we sell has been imported by the factory authorised distributors with full warranty back-up and parts service.

Lowe HF-225	High performance compact receiver	£425.00
Kenwood R-2000	10 Memories	£595.00
Kenwood VC-10	VHF converter for R-2000	£161.00
Kenwood R-5000	Top of their range receiver	£875.00
Kenwood VC-20	VHF converter for R-5000	£167.00
Yaesu FRG-8800	Fine performing all mode set	£649.00
Yaesu FRV-8800	VHF converter for above	£100.00
Icom IC-R71E	The old favourite	£855.00
Icom IC-R72E	Icom's latest, small & excellent	£645.00
Icom IC-R9000	The set with everything	£3,995.00
JRC-535	The latest from Japan Radio Company	£1,095.00

SCANNERS FROM RADIO SHACK

SUPER BARGAINS IN
REALISTIC SCANNERS!

PRO-38	10 Channel handy scanner (£99.95)	£79.95
PRO-2022	200 Channel search & scan (239.95)	£199.95
PRO-2024	60 Channel search & scan (£179.95)	£99.95
PRO-37	200 Channel handy search & scan (£249.95)	£229.95
PRO-2006	400 Channel with fabulous performance with FREE discone (worth £49.95)	£329.95
AR-950	Base/mobile scanner	£249.00
AR-2000	Series II 0.5-1300, 1000 memories	£249.00
AR-2002	25-550 & 800-1300MHz	£487.00
AR-3000	All mode scanner 100kHz-2036MHz	£765.00
Kenwood RZ-1	Wide band coverage	£275.00
Icom IC-R7000	25-2000 high performance receiver/scanner	£895.00
Icom R-1	100kHz-1300MHz 100 memories handy	£369.00
Icom R-100	High performance base/mobile	£485.00
Black Jaguar	AM/FM handy scanner	£199.00
Bearcat UBC-200XLT	200 memories	£229.00
Jupiter MVT-7000	Hand-held 100 memories	£289.00
Jupiter MVT-6000	Base/mobile version	£299.00
Fairmate HP-200E	Wide band 100-600 & 805-1300kHz	£269.00

Carriage free in U.K. Call us for our tax free export prices.

We will be pleased to quote you for anything you require in the communications and computer field. We are pleased to hear from you and see you. We aim to give you the attention you deserve, so please call before you come along.

73s Terry Edwards G3STS

RADIO SHACK LTD

188 Broadhurst Gardens, LONDON NW6 3AY



(Just around the corner from West Hampstead Station on the Jubilee Line)



Tel: 071-624 7174 Fax: 071- 328 5066

Fill in the order form on page 80 in BLOCK CAPITALS - up to a maximum of 30 words plus 12 words for your address - and send it, together with your payment of £2.35, to Trading Post, Short Wave Magazine, Enefco House, The Quay, Poole, Dorset BH15 1PP. If you do not wish to cut your copy of *SWM*, or do not wish to use the order form provided, you must still send the corner flash or your subscription number as proof of purchase of the magazine. Advertisements from traders, apparent traders or for equipment which it is illegal to possess, use or which cannot be licensed in the UK will not be accepted.

WANTED Parmeko transformer model 6000/8 and Leak TL25 amplifier. Tel: (0661) 852874 evenings.

FOR SALE Military Airband Listeners. I have frequency logs for sale covering 118-136 and 225-400MHz in 25kHz steps. Keep your frequencies in order! Plus provision at rear for a/field channel lists. £5.00 to T. Ford, 94 Everingham Road, Sheffield S5 7LG. Do I have a frequency you've been searching for?

FOR SALE Sangean ATS 803A MkII world band receiver plus mains adaptor, boxed, as new, £80. Eddystone EC10 MkII communications receiver plus 12/9V adaptor, £40. Good working order. Jed. Tel: (0799) 584223 South Cambridgeshire.

FOR SALE Realistic PRO 2005 scanner boxed as new with Tandy discone antenna (new) and mag mount, £175. Tel: 081-992 8143 Ealing.

FOR SALE Yaesu FRG-8800 general coverage receiver 0.15-29.999MHz plus 144MHz module 118-174MHz, £500 o.n.o. Tel: 061-491 3755 after 6pm.

FOR SALE Bearcat UBC200XLT v.g.c. complete with charger and case, £120 o.n.o. Also Mapsat v.h.f. weather sat RX, cased, v.g.c., £40 o.n.o. John G6YRB. Tel: (0695) 33499 evenings and weekends.

FOR SALE Amstrad 2086 colour monitor 30Mb HD lots of software, excellent condition, £200. Spectrum 48K circuit board, Rotronics Wafadrive plus 16 wafers, Kempston printer interface, £40 the lot. Tel: 0222 551392.

EXCHANGE or **FOR SALE** FRG-7 h.f. receiver 0-30MHz with 144MHz v.h.f. converter, £150. Exchange for a ERA Microreader MkII. John. Tel: 021-477 8163 anytime.

FOR SALE Yaesu v.h.f./u.h.f. communications receiver FRG-9600 hardly used, perfect condition, £400 o.n.o. Steve. Tel: 091-265 7086 Tyneside after 6pm evenings.

FOR SALE Panasonic BF3100L communications receiver, 32 bands inc f.m., l.w., m.w., b.f.o., digital read-out, mains/battery, good condition, £90. Tel: 051-625 7654 Wirral.

SEE THE END OF TRADING POST FOR A SPECIAL OFFER. YOUR AD' COULD APPEAR IN OUR SISTER PUBLICATION PRACTICAL WIRELESS AS WELL, REACHING ANOTHER 25 000 POTENTIAL BUYERS.

FOR SALE Sony PRO-80 scanner with airband and 8-way tuning 150kHz-108MHz and 115-223MHz with AC-D4M power adaptor, case, earphone, boxed with manual, mint condition, £200. WANTED Signal R-5375 Heathrow crystals. Chris. Tel: (0753) 840534 Windsor.

FOR SALE FRG-8800, £500. ERA Microreader tutor, £80. Realistic v.h.f./u.h.f. 5in b/w TV, £50. Labgear u.h.f. to v.h.f. converter, £20. If all together, £600. Reg Vickers. Tel: (0532) 661348 Leeds.

WANTED Hallicrafters SX-28 receiver (550kHz-42MHz) in good condition, with manual if possible. P. Jarrett. Tel: (0628) 485671 Bucks.

FOR SALE Global a.t.u. AT1000, £40. Maplin active a.t.u., £50 150-30MHz cased. Cirkkit automatic NiCad cyclo battery charger, 8 cell pack and 4 cell, £35. Buyer collects. Tel: (0379) 652880.

EXCHANGE HS WX2 two months old and Diawa 9.2A power supply unused for PRO2002 scanner. Also want J-Beam 4-el quad in good condition or w.h.y. Tel: (0670) 855953 anytime.

FOR SALE RA17L over-hauled, excellent condition, new valves, spare set, £230. Marconi TF2950/5 mobile radio test set, £350. Pye PF85 u.h.f., £50. All with manuals o.n.o. BJ200 MkIII scanner wall charger £100. Dave. Tel: 081-858 1448 London SE3.

FOR SALE JIM pre-amp 100m boxed, £50. Tel: 031-337 7384.

FOR SALE Yaesu FRG-7700 receiver, FRT-7700 antenna tuner, FRV-7700 v.h.f. converter, Yaesu headphones, MM2000 RTTY to TV converter all very good condition and in use. Best offer o.n.o., £300 the lot. Tel: (0673) 843746.

FOR SALE FRG-8800 with v.h.f. converter and FRT-7700 antenna tuner, £450. Comax CD67-decoder with built-in display. Tel: (0271) 812622 North Devon.

FOR SALE collector's item Eddystone S640 receiver 1.7-31MHz requires replacement of one tuning drive cord otherwise full working condition, few spare valves, £90 inclusive of carriage o.n.o. Peter Dawson. Flat 4, 1 Swan Lane, Stroud, Glos GL5 2HF.

FOR SALE Yaesu FRG-8800 mint, boxed, with FRT-7700 tuner, FRV-7700 converter, £430. May accept latest model scanner in part exchange. Buyer collects or arranges 'RV' reasonable distance from Bristol. Tel: (0272) 861589.

FOR SALE Kenwood R2000 receiver purchased new in March and used only minimally, 1991 *WRTH* and *PWBR* handbooks, £495. No offers. Tel: (0202) 892986 Bournemouth.

FOR SALE Sony ICF-2001D receiver, £165. Tel: (0767) 314381 Bedfordshire.

FOR SALE Sony ICF-7600D receiver, £75. WANTED FRV-8800 or FRV-7700 or FRT-7700 a.t.u. Will exchange with cash adjustment. Tel: (0244) 831138 Deeside, Wales.

FOR SALE AOR 1000 hand-held scanner as new in box complete with NiCads, mains and car charger, antenna, instruction book, etc., £180. Tel: Warrington 574445.

FOR SALE AOR 2002 excellent condition, £260. Tel: (0252) 811774 Fleet.

FOR SALE Philips D2935 World Band receiver, 0.15-30MHz, a.m. including s.s.b. also f.m. waveband, digital tuning, boxed, immaculate condition, £85. Tel: (0494) 450432 High Wycombe.

FOR SALE Yaesu FT-726R 144MHz, 430MHz with 10-element antennas both bands, condenser microphone, Yaesu YS-500 wattmeter standing wave bridge, ready to go satellite communication system in first class new condition, £450. Tel: (0253) 725499 or (0253) 712769.

FOR SALE Realistic PRO-2022 200 channel scanner, hardly used, 8 months old, boxed with manual, £160 o.n.o. Also Advanced Morse trainer MMS2 with instructions plus Morse key, £75 o.n.o. Tel: 021-354 2815 Sutton Coldfield, Birmingham.

FOR SALE Vintage equipment. W/ S 19 MkIII (Russian Legends), R1155, R1475, R209, R216, HRO, Redifon GR-361 TX/RX, £50 each o.n.o. T19.ARC5 command transmitter, £20, BC221, £15, VCR97 tube, £5, No. 10 calibrator, £10. Tel: (0704) 64398 Southport.

FOR SALE Yaesu FT-101 transceiver Tranz Match s.w.r. bridge, spare valves, mic, manuals, very good condition, only £150. Buyer collects. Tel: (0204) 43589 Evenings Bolton.

FOR SALE Trio 9R-59DS with coverage from 550kHz to 30MHz including speaker and spare set of valves, £35. Buyer collects. Tel: (0268) 550131 Essex.

EXCHANGE AOR2000 scanner 3 months old for PK232 MBX or sell for £200. Paul. Tel: (0780) 83458 shifts so keep trying!

FOR SALE Trio R2000 receiver with VC10 v.h.f. adaptor, very good condition plus box and manual, £360. Tel: (0538) 702215.

WANTED Antenna telescopic mast or light-weight tower approximately 21m height, but may consider something smaller. Tel: (05395) 32827 anytime Cumbria.

FOR SALE Sony ICF-2001 hardly used, £190. Realistic PRO2004 scanner, modified for 400 channels and fast scan, £180. JVC 610 5in portable TV PAL/SECAM 5.5, 6 + 6.5MHz sound, £150. Tel: (0543) 252121 south-east Staffs.

FOR SALE Kenwood R-5000, three filters fitted, mint condition, £700. Icom R72 unused, perfect, £450. DX100 tele converter, as new, £50. Tel: 081-785 7314 evenings only Putney.

ICOM

ICOM are proud to introduce the IC-R72 Communications Base Receiver to complement the IC-R100 Mobile and IC-R1 Handheld receivers giving the enthusiastic listener a full choice.



Features:

- **Direct Frequency entry**
- **99 Memory Channels**
- **Built-in clock and timer**
- **AC/DC operation**
- **Noise Blanker**
- **Pre-amp and Attenuator**
- **ICOM's DDS system (direct digital synthesiser)**

IC-R72 Communications Receiver

IC-R72 Communications Receiver

ICOM's communication receivers have a reputation for reliability and quality. Building on this reputation the IC-R72 HF receiver is one of a new line of wideband receivers to satisfy listeners everywhere.

This compact receiver has continuous coverage from 100kHz—30MHz, in SSB, AM and CW modes. An optional UI-8 adds FM reception. The easy to operate IC-R72 is superb for beginners or experienced DX'ers alike and is equipped with a variety of functions. The IC-R72 joins ICOM's current line of quality receivers. For a free brochure on this or any other ICOM Amateur Radio product contact your local authorised ICOM dealer or ICOM (UK) Ltd.


Icom (UK) Ltd

Dept. SW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 741741. Fax: 0227 360155.

Visa & Mastercards: Telephone orders taken by mail order, instant credit & interest-free HP. Despatch on same day whenever possible.



THE ULTIMATE DX EXPERIENCE

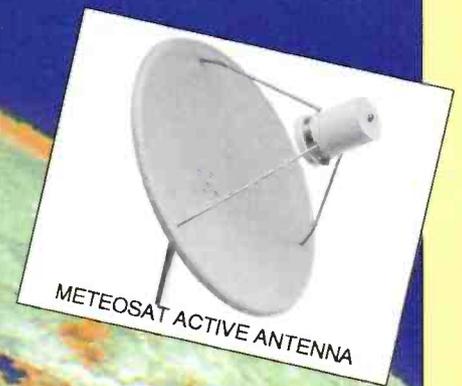

MICROSAT-3

It is truly a stunning experience watching the world unroll before your eyes - and that is what you can see when you have the facility to receive weather pictures direct from space. In the past, reception of Meteosat and similar geostationary satellites has only been available for professional users, but with the introduction of the new **MICROSAT-3**, anyone who owns a PC compatible computer and a clear view of the sky can watch old Mother Earth roll by in glorious technicolour.

The **MICROSAT-3** is a high performance weather satellite receiving system made up of three units -

- 1) The High Gain (40dB) Dish and Low Noise Head Unit
- 2) The RX-1700 Receiver (needs a simple 12Vdc supply)
- 3) The Decoder Card which fits any option slot of a PC.

To complete the system, comprehensive software is included which allows you to be up and running as soon as you have completed the simple installation.

Powerful software includes image storing for time-lapse weather observation, location identifying from lat/long, complete satellite schedules and simple enjoyment; check on the BBC weatherman to see if he's right.

For further details, contact Matlock or, better still, call in and see the system in operation. This system is absolutely the best you can buy.

(Trade enquiries invited)

LOWE ELECTRONICS LIMITED

Chesterfield Road, Matlock, Derbyshire DE4 5LE Tel: 0629 580800 Fax: 0629 580020

Barry (S Wales): 0446 721304 *Bournemouth: 0202 577760 Bristol: 0272 771770

Cambridge: 0223 311230 Cumbernauld: 0236 721004 *Darlington: 0325 486121

London (Heathrow): 0753 545255 London (Middlesex): 081-429 3256 *Closed all day Monday



WHAT SCANNER

AUTUMN 1991
£1


WHAT SCANNER
*Comprehensive details of
available makes*

WHAT IS A SCANNER?
The scanner explained

COMPETITION
*Enter and win an AR-2000
scanner*

**MARINE BAND
FREQUENCIES ON THE
FAIRMATE 100**

NEWSCAN

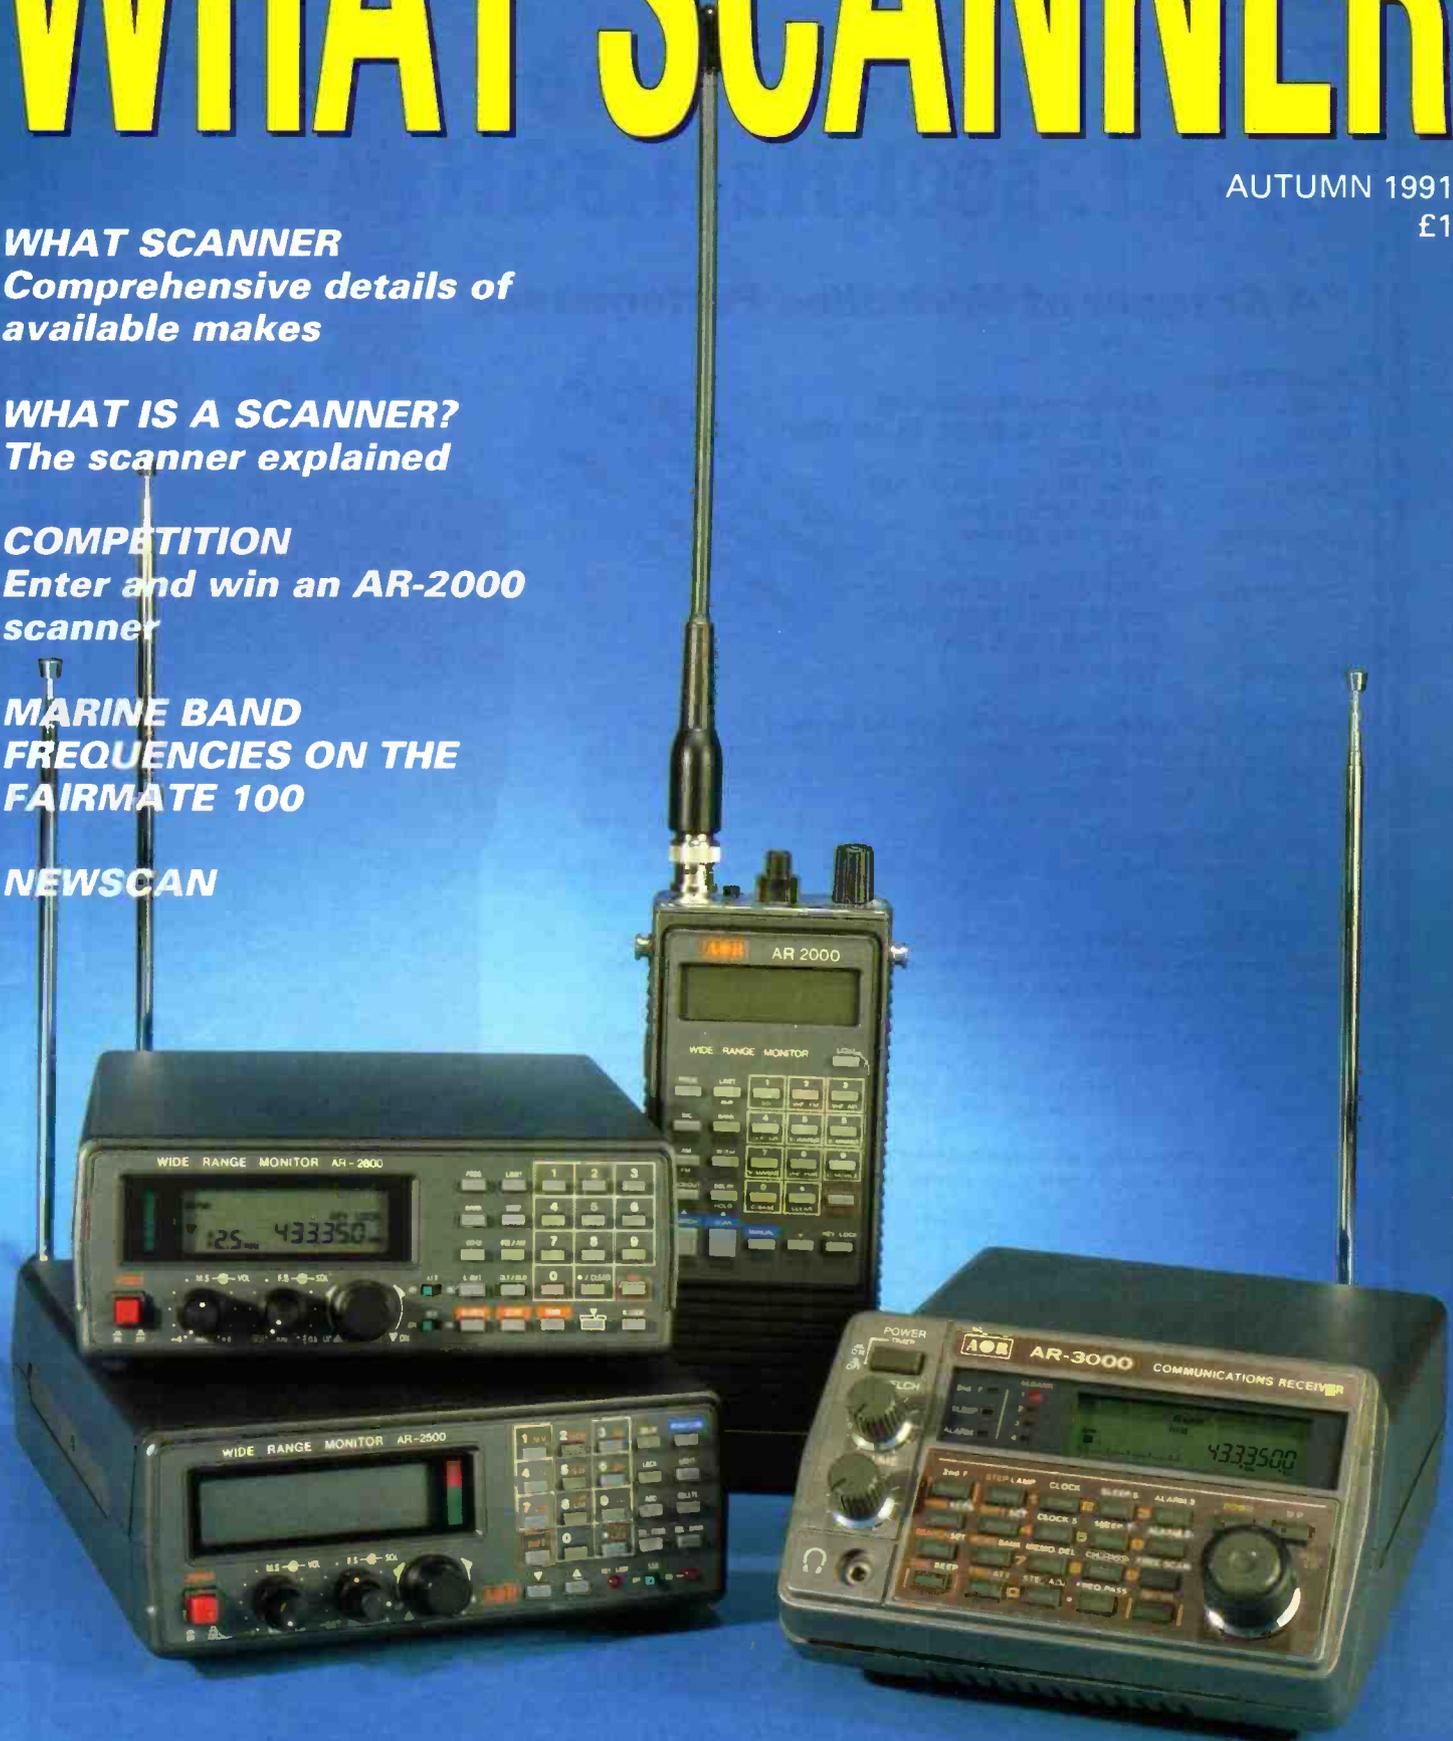

ALINCO's

Cracking New Baby Scanner DJ-X1. 500kHz-1.3GHz

"A Scanner of Unrivalled Performance"

Specification:

Modes: AM/Narrow FM/Wide FM
Steps: 5, 9, 10, 12.5, 20, 25, 30, 50, 100kHz
Antenna: 50Ω BNC
Supply: 6-15V DC (Internal 9V AA)
24mA (Battery save.)
Dimensions: 110 x 53 x 37mm
Weight: 370g
Configuration: AM/FM Triple conversion
Sensitivity: NBFM -8dB (12dB SINAD)
AM -2dB (10dB S/N)
Memories: 100 in banks.

STOP PRESS!!!
"Sensitivity far better than its
obvious rivals"
says Japanese magazine
review

The DJ-X1 scanner represents a major step forward in scanner design. It heralds the era of the compact monitor receiver that really can be termed "pocket size". Alinco have managed to produce a receiver that has until now, been kept a close secret even to those in the industry. Recognising the fact that most handheld scanners are too large to be carried inconspicuously, ALINCO set about designing a receiver that bristled with the latest features, had a good battery life, and yet took up half the size of its rivals.

The DJ-X1 is the culmination of an extensive design programme from one of the most dynamic manufacturers of communications equipment in Japan today. It has an unbelievably low current drain of just 24mA on battery save and using 6 AA cells this will give extensive monitoring time. And even if you accidentally leave the receiver switched on, it will turn itself off after a pre-programmed time, thus further preserving battery power. Comprehensive scanning facilities include 3 speeds, and 100 memories are provided for flexible storage of scanned channels.

For further information on this amazing receiver contact us today or visit your local approved dealer who will be pleased to help.



£269

Available
from all good
dealers.

ALINCO (UK) Ltd.

22 Main Road, Hockley, Essex. SS5 4QS

Tel: 0702 206835

It's only during the past few years, that the use of scanning receivers has become really popular in this country. Short wave listening has always been popular, permitting you to listen to signals from different corners of the globe in the comfort of your own home. In contrast, a scanning receiver only allows you to monitor relatively local signals, but these are often just as interesting and can range from amateur, maritime and aircraft transmissions to satellite and space communications.

This recent upsurge in interest is partially due to the increase in public awareness of personal communications devices such as Cellular and Cordless telephones and partially due to the availability of scanning receivers. Although scanners have been around for more than ten years, it is only with the advent of microprocessor control circuits and surface mounted components that the cost and performance of such receivers has made v.h.f. / u.h.f. listening possible for people other than professional users or dedicated hobbyists.

What Can a Scanner Do?

Most scanning receivers have two main modes of operation. The first of these is usually referred to as the 'SCAN' mode and is where this type of receiver gets its name from. In the Scan mode frequencies of interest need to be pre-programmed into a number of 'MEMORY' channels. When Scan is selected the receiver sequentially tunes to each memory channel until a signal is found. The scan then stops until the transmission ends or a predetermined period of time has elapsed, at which point the scan continues until another signal is found. By scanning memory channels it is possible to automatically monitor a large number of different frequencies without having to constantly operate a tuning knob. This makes it particularly useful when frequencies are known but the transmissions are brief - such as with

aircraft communications.

All of this is fine if you know what frequencies are being used - if you don't you will need to use the 'SEARCH' mode. This is the other main method of operation offered on most models of scanning receiver. In this mode, the receiver automatically searches for signals within pre-determined frequency limits set by the user. As in the scan mode, the search stops when a signal is found. The frequency can then be transferred to a memory channel from which it can be instantly recalled at the touch of a button. Some receivers can do this automatically so all you need to do is set up a search band and then let the scanner do all the hard work for you.

Most modern designs of scanning receiver have several hundred memory channels which are often divided into banks of 10 or more. These can then be selected individually or as a bank for inclusion in a scan. The ability to temporarily remove a memory channel from a scan is usually referred to as a 'LOCKOUT' function and on some models is also available in the search mode in order to prevent the receiver stopping on specific frequencies.

Scanning receivers tend to fall into one of three categories - Base station, Mobile and Hand-held. The latter being the most popular amongst users at the moment. Base station models tend to be fairly large and have a built-in mains supply. They have the advantage of being easy to operate because the controls are reasonably sized and they normally have a better performance than the other types. This is important when an external antenna is used or if you live in a city where a lot of strong signals are likely to be present.

Models designed for mobile use tend to be more compact than their base station counterparts as they operate from an external 12V d.c. supply and so do not have to incorporate a bulky mains transformer. They generally have a reasonable performance and often work as well as as dedicated base stations. Hand-held scanners are designed just for that purpose. They have to be small, lightweight and contain their own batteries. In order to be able to meet these requirements, they may have to compromise on performance which may be disappointing when used with anything other than the supplied antenna. In

addition, because of the small size, the user often has to operate several controls in sequence in order to select particular functions. However, both of these drawbacks are usually offset by the convenience of being able to carry the receiver to particular events or locations.

In the UK it is particularly important to choose a model of scanning receiver that is suited to the types of transmission likely to be heard. Several models currently available were originally designed for the American market and may not be entirely suitable for use in this or other European countries. The main points to look out for are the frequency coverage - which in modern designs tends to be continuous from 25-550MHz, any additional ranges should be treated as a bonus. The tuning step size which should include 25, 12.5 and 5kHz steps, and be manually selectable, and finally what is perhaps the most important item, ensure that both a.m. and n.b.f.m. modes are available and are manually selectable. Additionally w.b.f.m. may be found on some models. This is useful if you wish to listen to TV and radio broadcasts including East European stations in the 60-80MHz band.

Where Can I Find Out More?

Right here of course - *Short Wave Magazine* has a regular column devoted to Scanning in which readers questions are answered. Other columns in the magazine feature items of interest to scanning enthusiasts and new products are frequently reviewed. A good general guide to the hobby which I can thoroughly recommend is Peter Rouse's book *Scanners*, which is available from the SWM Book Service. Once you own a scanner and want to know where to find particular transmissions you can try *The Complete VHF/UHF Frequency Guide* which is also available from SWM.

What is a Scanner

Alan Gardner

Marine Band Frequencies on the Fairmate HP 100E

The very flexibility and choice of programmable functions on this type of scanner can lead to some difficulties until you have learnt how to 'fly' them. Many new purchasers are disappointed with the performance initially, but this can usually be put down to the lack of understanding of how to program the memory scans. The scanners are usually delivered with a some pre-set frequency limits in each bank in the SEARCH MODE, which can be changed if you wish and some frequencies programmed into each bank of the SCAN MODE. Whilst the frequencies already in the SEARCH MODE memory banks are relevant and contain many potentially interesting frequencies, the SCAN MODE memory banks are pre-loaded with frequencies that, the author suspects, are only put in to initially test the machine and do not have much relevance to the individual user.

Bewilderment

It would be as well at this stage to go through the meaning and difference of these two modes as this can lead to the original, and temporary, bewilderment.

In SEARCH MODE the scanner moves through all the search banks in numerical order seeking and transmission within the pre-set upper and lower limits of the frequencies of the search

The Fairmate HP 100E, along with the practically identical AOR, are extremely popular. The wide frequency range available, ease of carrying and the flexible power requirements make them probably the most versatile scanners on the market today. T. A. James explains how they can be programmed for the Marine Band frequencies.

bank it happens to be in at that time. It does this logically i.e. one after the other in numerical order. It can be made to search any single bank or number of banks if you wish, but if you do not LIMIT this search, it will go through all the search banks and start again at zero. The problem with SEARCH MODE is, because it is such a wide search, it misses many transmissions due to either having gone past the frequency of the a transmission already or it has not got there yet. The narrower the search the more chance of picking up a transmission.

This is where SCAN MODE comes in. By programming a number of known frequencies into each scan bank we can improve our chances of picking up a transmission because, presumably, we have only put the frequencies in that we expect to hear where at our location. It would be a waste of time

putting the frequency for Glasgow Airport in the scan if you were listening in Cornwall - you could not hear it and it would take up scan time.

In SCAN MODE the scanner has a scan rate of some 20 channels per second, so it follows that it takes some 5 seconds to scan a bank with 100 frequencies in its memory - more than long enough to pick up any transmission.

Frequency Lists

It is, of course, necessary to know the frequency before you can place it into the memory of the SCAN mode. Excellent frequency lists are offered by many advertisers in this magazine. Some interesting frequencies may be picked up during operation in the SEARCH mode. Make a note of these for inclusion in the memory of your SCAN mode. Do not try to enter them directly from SEARCH mode until you are

really confident in the programming and the effect of programming in SCN mode.

To place a frequency in the memory of the SCAN mode first press MANUAL, the frequency already shown in the window will disappear and the small MHz sign will start to flash. Enter the frequency, not forgetting the decimal point. Then press ENT (enter). Next press PROG, the existing Bank Number will disappear. Enter the Bank Number you wish it to be placed in and that is it.

Put simply, it is MANUAL - Enter frequency - ENT - PROG - Enter Bank Number.

One word of warning. If you forget to press PROG or forget to enter a new bank number it will put the new frequency into the bank number that was in the window when you started, thus possibly messing up a nice tidy scan in another bank. There is nothing more annoying than picking up Jimmy Young in the middle of an airband scan. The scan will stop at that point because, unlike airline pilots, his transmissions do not stop.

Always try to place your chosen frequencies in the SCAN in a tidy logical manner. As you already know you have 10 banks of 100 frequencies that you can place in memory. It is possibly easier to follow the manufacturers guidelines in the SEARCH mode and put the civil airband SCAN into

Bank 1, (Bank Nos 100-199), military airband SCAN into Bank 2 (Bank Nos 200-299), Marine band scan into Bank 6 (Bank Nos 600-699), etc.

Potentially Difficult

One of the most potentially difficult blocks of frequencies to SCAN is the marine band. This is because firstly they converse with each other using channel numbers rather than frequencies. The reason for this is that it is easier for a mariner to remember a channel number than a six-digit frequency. The second difficulty is caused by the fact that some, but not all, transmissions are in what is termed DUPLEX. This means that, even though both ship and shore are talking to each other on the same channel, the ship is transmitting on one frequency and the shore is transmitting on another. These two frequencies are as far apart as possible. This is for technical reasons which are outside the scope of this article.

If we were to program the frequencies into our SCAN for the marine band in a haphazard way, we could pick up a transmission say from a ship to the shore and, presuming we are in the DELAY mode, after the ship has finished speaking and the delay has run out, the set will start scanning again. Now, we wish to listen to the other half of the conversation but the frequency carrying this

half could be anywhere in the memory. You may not even get there by being blocked by another transmission from another source. The first rule is always program the two frequencies of a duplex channel alongside each other. We can then, by utilising the very clever UP/DOWN tuning knob on the top of the scanner, switch between the two frequencies that make up the channel. This frequency will only be one click of this knob in either direction. If you click it one way and do not pick

up the reply, turn it two clicks in the opposite direction to go past where you picked up the original signal and back one frequency. This, of course, will be easier if you utilise the HOLD facility from the start where it will lock onto the original frequency and stay there.

AUX Facility

Another facility that is very useful for marine band listening on these scanners is the AUX facility. This feature allows any one, preset

channel, to be interrogated automatically every 2 seconds. Channel 16 is the initial calling channel, the distress channel and the urgent channel. It is from here that the initial call takes place with both parties agreeing a channel to move to. It is useful to make the memory number that holds Channel 16 the AUX channel. This means you will hear everyone that calls. You can then decide whether to follow them or keep scanning.

Table 1 is a suggested way to lay out your scan. In this case the scan is placed in Bank 6, so all the numbers start with a 6. If you put the scan into bank 9, all the numbers would start with a 9, of course.

You will find that in many sea areas a lot of the channels are unused. In that case use the CLEAR facility to wipe them out of memory rather than the LOCKOUT facility. The LOCKOUT facility still scans that frequency but it does not show up. We should be aiming at the shortest possible scan consistent with the number of frequencies we wish to scan.

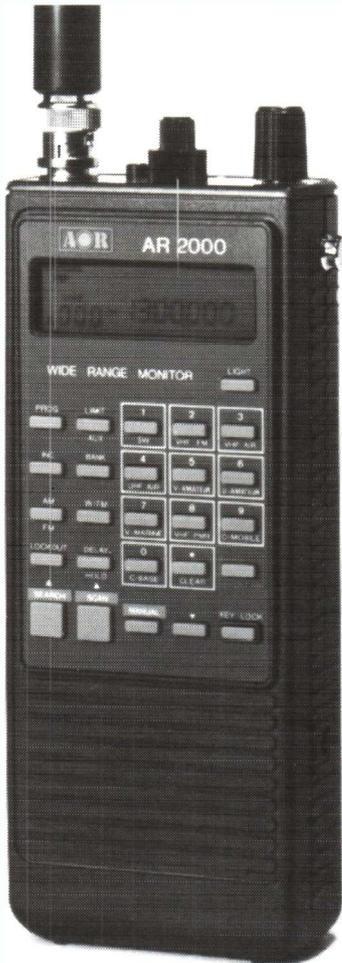


Table 1

Bank 6

Bank No	Freq	
600	156.00	Coastguard/lifeboat
601	156.03	Ch 60 ship
602	160.63	Ch 60 shore
603	156.05	ch 1 ship

RULES



Win an AOR 2000

Free to enter
competition

Twenty years ago you would have needed a rack full of equipment in order to be able to monitor v.h.f./u.h.f. transmissions. Ten years ago, crystal controlled equipment was just becoming available which would allow you to scan up to ten frequencies within a small band. Seven years ago the first synthesised scanning receivers offering continuous frequency ranges and tens of memory channels were just becoming available. Three years ago the first continuous coverage hand-held scanners with hundreds of memory channels were starting to appear. The past two years have seen the introduction of scanners with thousands of memory channels, continuous frequency coverage from below 1MHz to over 1GHz, single sideband reception, multiple scanning modes and computer control. Whatever can we expect next? you may ask. Well that could depend on you.

AOR LISTEN TO YOU

AOR have been responsible for many of the major innovations in scanning receiver design over the past ten years and they would like to hear your ideas for future generations of scanners. In order to add a little bit of an incentive, they are giving one of their latest models, an AR2000 hand-held receiver as a prize for the best new idea. Unlike normal competitions we are not just giving this superb prize away - you will have to work for it! You don't have to answer any questions or write a winning slogan but you will have to do some serious thinking in what we believe is the first competition of its type in this magazine.

The rules are simple - all you have to do is write down what feature or features you would like to see incorporated in the next generation of scanning receivers. It could be a particular method of operation, a new style case design or a revised front panel layout. Anything that you think would be an improvement or would like to see.

The most practical and innovative ideas will be selected by The Editor together with 'Scanning' columnist Alan Gardner and a winner chosen. Although only one person will receive the prize everyone entering should benefit as we will be passing on your best ideas to AOR, many of which could be incorporated into future designs.

You can either describe or sketch your ideas but they must only be on one side of an A4 sheet of paper with your name and address clearly printed on the opposite side. Try and be concise with your description and make sure that you clearly state the most important features.

We are expecting a large number of entries for this competition so it is important that you follow these instructions in order to avoid your entry being consigned to the waste paper bin.

Once you have completed your entry send it to: AR2000 Competition, PW Publishing Ltd., Enefco House, The Quay, Poole, Dorset BH15 1PP. The winner will be announced in a future edition of *SWM*. The closing date for all entries is 31 December 1991.

Unfortunately, the competition is not open to employees of PW Publishing Ltd, its authors or advertisers in *Short Wave Magazine*. Each entry must be accompanied by the appropriate 'flash' from the bottom of this page. The Editor's decision is final and no correspondence will be entered into.

WHAT SCANNER COMPETITION
AUTUMN 1991

Another First

Alinco have introduced their first scanning receiver and it is hoped that the first shipments will be made at the end of October or early November.

Designated the DJ-X1, it comprises a very compact design measuring only 110 x 53 x 30mm, thus making it one of the smallest models available. Frequency coverage is from 500kHz to 1300MHz without gaps. It has the widest number of programmable steps ever to be made available: 5/9/10/12.5/20/25/30/50 and 100kHz. Modes include a.m., n.b.f.m. and w.b.f.m. and sensitivity is claimed to be unsurpassed.

The price has not yet been announced, but it promises to be highly competitive! For those needing further details, contact **Waters & Stanton Electronics, 22 Main Road, Hockley, Essex SS5 4QS. Tel: (0702) 206835. FAX: (0702) 205843.**



NEWSSCAN

Dual Airband Scanner

Nevada have announced the world's first dual airband scanning receiver, covering both civil and military airbands.

The set has 1000 memory channels in ten search banks that can be scanned at over 20 channels per second.

As a dedicated airband radio, the HP1000AB has been designed to give outstanding performance in the civil/military airbands compared to other wide-band scanning

receivers.

The HP1000AB will sell at £229 (including VAT) including charger, carrying case, earphone and NiCad Batteries.

The first shipment is due to arrive in early November. More details can be obtained from **Nevada Communications, 189 London Road, North End, Portsmouth, Hants PO2 9AE. Tel: (0705) 662145. FAX: (0705) 690626.**



Scanning in Japan

Most major scanning receiver manufacturers in Japan will, in future, delete the cordless and cellular frequencies used in Japan from their products for the Japanese domestic market. This will also apply to amateur radio transceivers that include these frequencies as an extra receiving feature.

The recently introduced Icom R-7100 is the first receiver to comply with this request on the Japanese domestic market, and has all frequencies in cellular and cordless use deleted.

Thanks to **SSE** for this information.

New Sony Centre

Bredhurst Electronics Ltd of Handcross, West Sussex have been appointed as a Sony Communications Centre. They will be stocking the complete range of Sony World Band Receivers and accessories to compliment their existing selection of radio products from all major manufacturers.

Bredhurst Electronics Ltd, High Street, Handcross, West Sussex RH17 6BW. Tel: (0444) 400786. FAX: (0444) 400604.


In Stock

Link Electronics of Peterborough have informed me that they now have available, in stock, the latest offerings from Realistic.

The *Patrolman* PRO-41 is a 10-channel scanner covering 66-88 and 137-174MHz in 5 and 12.5kHz steps. This hand-held scanner requires five AA NiCads or Alkaline batteries or a 12V external power source. It comes complete with antenna and belt clip and can accept an external speaker or earpiece. It replaces the PRO-38 and can be bought for £99.95.

The *Patrolman* PRO-35 is a 100-channel scanner covering 66-88MHz in 5kHz steps and 108-136.975MHz in

12.5kHz steps. This hand-held scanner comes complete with NiCads and charger or it can be powered from a 12V external power source. It features both channel lockout, priority channel facilities as well as 10-channel storage banks. It also has a monitor memory for



memorising a frequency during scan, frequency search that allows scanning between two frequencies and two-speed scan and search.

This is a new entry into the mid-range hand-held scanner market and has been designed for the airband, p.m.r. or amateur enthusiast.

The PRO-37 has yet to be released. However, this will be a 200-channel hand-held scanner with Hyper-Scan to cover the top end of the hand-held market. Details will follow so keep an eye on the *SWM* news pages.

Link Electronics, 228 Lincoln Road, Peterborough PE1 2NE. Tel: (0733) 345731. FAX: (0733) 346770.

Scanmaster Scanner Controllers

Peter Longhurst of Garex Electronics has informed us that he had taken over the manufacture of the Scanmaster scanner controllers from David Husband of EMP Ltd. This will allow David to do what he does best - programming and designing.

If you would like details of the Scanmaster, then contact:

Garex Electronics, Station Yard, South Brent, South Devon TQ10 9AL. Tel: (0364) 72770. FAX: (0364) 72007.

WHAT SCANNER

■ Fairmate HP200



TYPE: hand-held
COVERAGE: 500kHz-1300MHz
MODES: a.m., f.m., w.b.f.m.
SENSITIVITY: below 2MHz less than 10µV for 20dB, 15-500 & 800-1300MHz less than 0.5µV for 12dB SINAD f.m., 15-600MHz less than 2µV for 20dB a.m. 60% modulation, 15-600MHz less than 3µV for 30dB S/N w.b.f.m.
RESOLUTION: 5-995kHz selectable
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: more than 100mW for 10% t.h.d.
SCAN RATE: 20 channels per second
SEARCH RATE: less than 40 channels per second
MEMORIES: 1000 in 10 x 100 channels
FEATURES: NiCads, carry case, shoulder strap, belt clip, d.c. cable, earpiece, three antennas and charger
REVIEWED:
PRICE: £269

■ AOR AR2000

TYPE: portable
COVERAGE: 500kHz-1300MHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: n.b.f.m. approx 0.5µV @ 12dB SINAD across most of range; a.m. approx 3µV @ 10dB S/N across most of range
RESOLUTION: 5/12.5kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: >100mW @ 10% distortion

SCAN RATE: up to 20 channels per second
SEARCH RATE: up to 40 steps per second
MEMORIES: 1000 in 10 x 100 channels
FEATURES: supplied with single wide-band whip antenna, a.c. charger, NiCads, 12V d.c. lead fitted with cigar lighter plug, soft case with carry strap and belt hook.
REVIEWED:
PRICE: £259


■ Yupiteru MVT-7000

TYPE: hand-held
COVERAGE: 8-1300MHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: n.b.f.m. >0.5µV for 12dB SINAD, w.b.f.m. 0.75µV for 12dB SINAD, a.m. 0.5µV for 10dB S/N
RESOLUTION: 5/10/12.5/25/50/100kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: 120mW into 8Ω
SCAN RATE: 15 channels per second
SEARCH RATE: 20 steps per second
MEMORIES: 200
FEATURES: variable display contrast, ten user-defined search patterns
REVIEWED: August 1991 *Short Wave Magazine*
PRICE: £289

■ Yupiteru MVT-6000

TYPE: base/mobile
COVERAGE: 25-550 & 800-1300MHz
MODES: a.m., f.m.
SENSITIVITY: 25-550MHz f.m. 0.5µV 12dB SINAD, 800-1300MHz f.m. 0.8µV 12dB SINAD, a.m. 0.7µV 10dB S/N
RESOLUTION: 5/10/12.5/25 or 30kHz
IMAGE REJECTION:
IF STAGE:

AUDIO OUTPUT:
SCAN RATE:
SEARCH RATE: 8 or 20 steps per second
MEMORIES: 100 in 5 x 20 channels
FEATURES: selective bank scanning, NiCads, telescopic whip, carry case & strap, belt clip
REVIEWED:
PRICE: £299

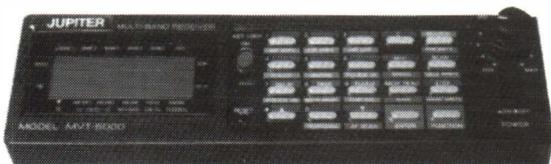

■ Yupiteru VT-125UK

TYPE: airband hand-held
COVERAGE: 108-142MHz
MODES: a.m.
SENSITIVITY: >0.5µV
RESOLUTION: 25/50kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: 60mW into 8Ω
SCAN RATE: 20 channels per second
SEARCH RATE:
MEMORIES: 30
FEATURES: i.c.d. signals meter, i.c.d. backlight
REVIEWED:
PRICE: £179



■ AOR AR2800

TYPE: base/mobile
COVERAGE: 500kHz-600MHz & 800-1300MHz
MODES: a.m., n.b.f.m., w.b.f.m., u.s.b., l.s.b., c.w.
SENSITIVITY: n.b.f.m. approx 0.5µV @ 12dB SINAD, a.m. approx 3µV @ 10dB S/N across most of range
RESOLUTION: 5kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT:
SCAN RATE: up to 20 channels per second
SEARCH RATE: up to 20 steps per second
MEMORIES: 1000 in 10 x 100 channels
FEATURES: supplied with a.c. power supply, whip antenna, d.c. lead, mobile mount, manual and fitted with internal NiCad battery pack
REVIEWED:
PRICE: £395

■ Yupiteru MVT-5000

TYPE: hand-held
COVERAGE: 25-550 & 800-1300MHz
MODES: a.m., f.m.
SENSITIVITY: 25-550MHz f.m. 0.5µV 12dB SINAD, 800-1300MHz f.m. 0.8µV 12dB SINAD, a.m. 1.5µV 10dB S/N
RESOLUTION: 5/10/12.5/25 or 30kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT:
SCAN RATE:
SEARCH RATE: 8 or 20 steps per second
MEMORIES: 100 in 5 x 20 channels
FEATURES: selective bank scanning, NiCads, telescopic whip, carry case & strap, belt clip
REVIEWED:
PRICE: £229

■ Fairmate HP-1000AB

TYPE: hand-held
COVERAGE: 108-143, 220-400MHz
MODES: a.m., f.m.
SENSITIVITY: a.m. better than 0.25µV for 10dB S+N/N, f.m. better than 0.25µV for 12dB SINAD
RESOLUTION: 5-995kHz in multiples of 5 or 12.5kHz
IMAGE REJECTION: better than -75dB
IF STAGE:
AUDIO OUTPUT: 100mW for 10% or less t.h.d.
SCAN RATE: over 20 channels per second
SEARCH RATE:
MEMORIES: 1000
FEATURES:
REVIEWED:
PRICE: £229

■ Shinwa SR001

TYPE: base/mobile
COVERAGE: 25-999.995MHz
MODES: a.m., w.b.f.m., n.b.f.m.
SENSITIVITY: -4dBµV or lower (12dB SINAD)
RESOLUTION: 5/10/12.5/20/25/50/100kHz
IMAGE REJECTION: 48.5dB
IF STAGE:
AUDIO OUTPUT: 2W into 4Ω
SCAN RATE: over 20 channels per second
SEARCH RATE: (v.f.o.) 35 channels per second
MEMORIES: 200 in 20 x 10 channels
FEATURES: RS-232C port, wireless remote controller, up to three option units can be incorporated including the external ROM
REVIEWED:
PRICE: £299

■ Nevada MS 1000

TYPE: mobile/base
COVERAGE: 500kHz-600MHz & 800-1300MHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: a.m. 500kHz-2MHz - 10µV 20dB; a.m. 0.7-1µV @ 10dB S/N; f.m. 0.5µV @ 12dB SINAD, w.b.f.m. 1µV @ 20dB S/N, high band f.m. 0.7-1µV @ 12dB SINAD
RESOLUTION: 5/12.5kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: 500mW or more
SCAN RATE: 20 channels per second
SEARCH RATE: 20 steps per second
MEMORIES: 1000 in 10 x 100 channels
FEATURES: user selectable search steps from 5-995kHz, selectable 10dB attenuator, keypad or rotary control, all metal case
REVIEWED: May 1991 *Short Wave Magazine*
PRICE: £279



■ Realistic PRO-2006

TYPE: base/mobile
COVERAGE: 25-520 & 760-1300MHz
MODES: a.m., w.b.f.m., n.b.f.m.
SENSITIVITY: w.b.f.m. 3µV for 25-520 & 760-1100MHz, 10µV for 1100-1300MHz; n.b.f.m. 3µV, a.m. 2µV 25-520 & 760-1100MHz, 5µV for 1100-1300MHz
RESOLUTION: 5/12.5/50kHz
IMAGE REJECTION: 60dB
IF STAGE:

AUDIO OUTPUT: 1.3W nominal
SCAN RATE: 26 or 13 channels per second
SEARCH RATE:
MEMORIES: 400 in 10 x 40 channels
FEATURES:
REVIEWED: February 1991 *Short Wave Magazine*
PRICE: £330

WHAT SCANNER

Realistic PRO-38

TYPE: hand-held
COVERAGE: 68-88, 136-174, 406-512MHz
MODES: f.m.
SENSITIVITY: 68-88MHz = 0.5µV normal, 2µV limit; 136-174MHz = 0.7µV normal, 3µV limit; 406-512MHz = 0.7µV normal, 4µV limit
SELECTIVITY: At 155MHz -6dB = ±10kHz, -50dB = ±17kHz
RESOLUTION:
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: nominal 260mW
SCAN RATE: 10 channels per second
SEARCH RATE:
MEMORIES: 10
FEATURES: Keyboard lock switch, l.c.d. channel readout, jack for earphone, belt clip and flexible antenna supplied.
REVIEWED: Short Wave Magazine October 1988 (£1.65 back issue)
PRICE: £80

AOR AR2001

TYPE: base station
COVERAGE: 25-550MHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: n.b.f.m. = 0.39µV @ 12dB SINAD @ 70MHz
SELECTIVITY: n.b.f.m. = ±13kHz @ 6dB, ±21kHz @ 70dB, w.b.f.m. = ±180kHz @ 6dB, ±46kHz @ 70dB, a.m. = 13.5kHz @ 6dB
RESOLUTION: 5, 12.5, 25kHz
IMAGE REJECTION: -50dB

IF STAGE: 750MHz, 455kHz
AUDIO OUTPUT: 1W @ 10% t.h.d.
SCAN RATE: 5 channels per second
SEARCH RATE: 6 seconds per MHz
MEMORIES: 20
FEATURES:
REVIEWED: Practical Wireless May 1984 (£1.65 back issue)
PRICE: Available second-hand

Uniden Bearcat 70XL

TYPE: hand-held
COVERAGE: 29-54, 135-174, 406-512MHz
MODES: f.m., a.m.
SENSITIVITY: 29-54MHz = 0.4µV, 136-174MHz = 0.5µV, 406-512MHz = 0.7µV
SELECTIVITY: -55dB @ ±25kHz
RESOLUTION: 5kHz
IMAGE REJECTION: -50dB
IF STAGE: 10.8MHz
AUDIO OUTPUT: 140mW at 10% t.h.d. into 8Ω
SCAN RATE: 15 channels per second
SEARCH RATE: 15 channels per second
MEMORIES: 20
FEATURES:
REVIEWED:
PRICE: £200*

Realistic PRO-2004

TYPE: base/mobile station
COVERAGE: 25-520, 760-1300MHz
MODES: a.m., w.b.f.m., n.b.f.m.
SENSITIVITY: w.b.f.m. 25-520 & 760-1100MHz = 3µV, 1100-1300MHz = 10µV all @ 30dB S/N @ 22.5kHz, n.b.f.m. 25-520MHz = 0.5µV, 760-1300MHz = 0.3µV all @ 20dB S/N @ 3kHz dev; a.m. 25-520 & 760-1100MHz = 2µV, 1100-1300MHz = 3µV all @ 20dB S/N @ 60%
SELECTIVITY: n.b.f.m. & a.m. ±9kHz @ -6dB, ±15kHz @ -50dB, w.b.f.m. ±150kHz @ -6dB, ±300kHz @ -50dB
RESOLUTION: 5, 12.5 or 50kHz
IMAGE REJECTION: -60dB
IF STAGE: 611.5, 607.505MHz, 48.5MHz, 455kHz (a.m.)
AUDIO OUTPUT: 1.8W @ 3% t.h.d.
SCAN RATE: 8 or 16 steps per second
SEARCH RATE: 8 or 16 steps per second
MEMORIES: 300
FEATURES: Lock-out key, squelch, priority function key and large l.c.d. read-out
REVIEWED: Short Wave Magazine April 1987 (£1.65 back issue)
PRICE: £330*

Uniden Bearcat 50XL

TYPE: hand-held
COVERAGE: 29-54, 136-174, 406-512MHz
MODES: a.m., f.m.
SENSITIVITY: 29-54MHz = 0.4µV, 136-174MHz = 0.5µV, 406-512MHz = 0.7µV for 12dB SINAD
SELECTIVITY: -55dB ±25kHz
RESOLUTION: 5kHz
IMAGE REJECTION: -50dB
IF STAGE: 10.8MHz
AUDIO OUTPUT: 500mW at 10% t.h.d. into 8Ω
SCAN RATE: 15 channels per second
SEARCH RATE: 15 channels per second
MEMORIES: 10
FEATURES:
REVIEWED:
PRICE: £99

AOR AR-2002

TYPE: base/mobile station
COVERAGE: 25-550, 800-1300MHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: n.b.f.m. = 0.3µV, w.b.f.m. = 1.0µV both @ 12dB SINAD; a.m. = 0.5µV @ 10dB S/N
SELECTIVITY: n.b.f.m. ±7.5kHz @ 6dB, w.b.f.m. ±250kHz @ 60dB, a.m. = ±10kHz @ 70dB
RESOLUTION: 5, 12.5, 25kHz
IMAGE REJECTION: -50dB
IF STAGE: 750, 48.03MHz (w.b.f.m.), 455kHz (n.b.f.m./a.m.)
AUDIO OUTPUT: 1W @ <10% distortion
SCAN RATE: 5 channels per second
SEARCH RATE: 6 seconds per MHz
MEMORIES: 20
FEATURES: Tuning knob plus keypad, real-time clock, computer control facilities
REVIEWED: Practical Wireless December 1985 (85p photocopy)
PRICE: £487

Revco RS-2000E

TYPE: base station
COVERAGE: 60-179, 380-520MHz
MODES: a.m., f.m.
SENSITIVITY: v.h.f. f.m. = 0.5µV, u.h.f. f.m. = 1.0µV
SELECTIVITY: -60dB @ ±25kHz
RESOLUTION: 5kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: 2W
SCAN RATE: 5 or 10 channels per second
SEARCH RATE: 5 or 10 channels per second
MEMORIES: 70
FEATURES: Auto search and store
REVIEWED:
PRICE: £279*

Uniden Bearcat UBC-175XL

TYPE: base station
COVERAGE: 66-88, 118-174, 406-512MHz
MODES: a.m., f.m.
SENSITIVITY: 29-54 & 136-174MHz = 0.3µV, 406-512MHz = 0.5µV, 118-136MHz = 0.8µV @ 12dB SINAD
SELECTIVITY: -45dB @ ±25kHz
RESOLUTION: 5kHz
IMAGE REJECTION: -55dB
IF STAGE: 10.85MHz, 450kHz
AUDIO OUTPUT: 800mW @ 10% t.h.d.
SCAN RATE: 5 or 15 channels per second
SEARCH RATE: 5 or 15 channels per second
MEMORIES: 16
FEATURES: priority scan, channel lockout, auto squelch, short term memory back-up, wood veneer case
REVIEWED: Short Wave Magazine December 1987 (£1.65 back issue)
PRICE: £170

JIL SX-200N

TYPE: mobile/base station
COVERAGE: 26-88, 108-180, 380-514MHz
MODES: a.m., n.b.f.m.
SENSITIVITY: f.m. => 60dB @ ±25kHz, a.m. => 60dB at ±10kHz
SELECTIVITY: 26-180MHz f.m. = 0.4µV, 380-514MHz = 1.0µV both at 12dB S/N, 26-180MHz a.m. = 1.0µV at 10dB S/N, 380-514MHz a.m. = 2.0µV @ 15dB S+N/N
SELECTIVITY: n.b.f.m. ±15kHz, w.b.f.m. ±180kHz, n.b.a.m. ±2.4kHz, w.b.a.m. ±6kHz, s.s.b. ±2.4kHz all @ 3dB
RESOLUTION: 100Hz, 1, 5, 10, 12.5, 25 or 100kHz depending on mode
IMAGE REJECTION: 60-460MHz = -50dB, 460-905MHz = -40dB
IF STAGE: 45.754, 10.5MHz & 455kHz
AUDIO OUTPUT: 1W into 8Ω with less than 10% t.h.d.
SCAN RATE: not given
SEARCH RATE:
MEMORIES: 100
FEATURES: 0.6m whip antenna, 1.8m d.c. power cable, mobile mounting bracket & wire stand.
REVIEWED:
PRICE: £500

IF STAGE: 10.7MHz, 455kHz
AUDIO OUTPUT: 2W
SCAN RATE: 4 or 8 channels per second
SEARCH RATE: 5 or 10 channels per second
MEMORIES: 16
FEATURES:
REVIEWED: Practical Wireless October 1981 (£1.65 back issue)
PRICE: £325*

Yaesu FRG-9600

TYPE: base station
COVERAGE: 60-905MHz (up to 460MHz for s.s.b.)
MODES: n.b.f.m., w.b.f.m., n.b.a.m., w.b.a.m., s.s.b.
SENSITIVITY: n.b.f.m. = 0.5µV, w.b.f.m. = 1.0µV both @ 12dB SINAD, n.b.a.m. = 1.0µV, w.b.a.m. = 1.5µV both @ 10dB S+N/N, s.s.b. = 1.0µV @ 15dB S+N/N
SELECTIVITY: n.b.f.m. ±15kHz, w.b.f.m. ±180kHz, n.b.a.m. ±2.4kHz, w.b.a.m. ±6kHz, s.s.b. ±2.4kHz all @ 3dB
RESOLUTION: 100Hz, 1, 5, 10, 12.5, 25 or 100kHz depending on mode
IMAGE REJECTION: 60-460MHz = -50dB, 460-905MHz = -40dB
IF STAGE: 45.754, 10.5MHz & 455kHz
AUDIO OUTPUT: 1W into 8Ω with less than 10% t.h.d.
SCAN RATE: not given
SEARCH RATE:
MEMORIES: 100
FEATURES: 0.6m whip antenna, 1.8m d.c. power cable, mobile mounting bracket & wire stand.
REVIEWED:
PRICE: £500

AOR AR2500

TYPE: base/mobile
COVERAGE: 5-550MHz & 800-1300MHz
MODES: a.m., n.b.f.m., w.b.f.m., u.s.b., l.s.b., c.w.
SENSITIVITY: n.b.f.m. approx 0.45µV @ 12dB SINAD, w.b.f.m. approx 1µV @ 12dB SINAD, a.m. approx 1µV @ 10dB S/N across most of range

RESOLUTION: 5kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: 500mW in 8Ω @ 10% t.h.d.
SCAN RATE: up to 36 channels per second
SEARCH RATE: up to 36 steps per second

MEMORIES: 1984 as 62 x 32 channels
FEATURES: 16 search banks, RS232 socket for computer control, supplied with a.c. power supply, whip antenna, d.c. lead, mobile mount and manual
REVIEWED:
PRICE: £419

JIL SX-400

TYPE: base station
COVERAGE: 26-520MHz (100kHz-1.4GHz with converters)
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: v.h.f. f.m. = 0.5µV, u.h.f. f.m. = 0.5µV both @ 12dB S/N; v.h.f. a.m. = 1.0µV, u.h.f. a.m. = 2.0µV both @ 10dB S/N
SELECTIVITY: f.m. = 60dB @ ±15kHz, a.m. = 60dB @ ±10kHz both with S/N 45dB
RESOLUTION: 5, 6.25, 10, 12.5kHz
IMAGE REJECTION: v.h.f. = 50dB
IF STAGE: 10.7MHz, 455kHz
AUDIO OUTPUT: 2W into 4Ω load
SCAN RATE: 4 or 8 channels per second
SEARCH RATE: 5 and 10 channels per second
MEMORIES: 20
FEATURES:
REVIEWED:
PRICE: £650*

Uniden Bearcat 100XL

TYPE: hand-held
COVERAGE: 66-88, 118-174, 406-512MHz
MODES: a.m., f.m.
SENSITIVITY: 30-50MHz = 0.3µV, 118-136MHz = 0.8µV, 136-174MHz = 0.4µV, 406-512MHz = 0.5µV for 12dB SINAD
SELECTIVITY: 50dB at ±25kHz
RESOLUTION: 5kHz
IMAGE REJECTION: -50dB
IF STAGE: 10.8MHz
AUDIO OUTPUT: 300mW at 10% t.h.d.
SCAN RATE: 15 channels per second
SEARCH RATE: 25 frequencies per second
MEMORIES: 16
FEATURES: Priority channel, keyboard lock, auto squelch, battery low indicator, back-lit display
REVIEWED:
PRICE: £190*

Realistic PRO-32A

TYPE: hand-held
COVERAGE: 68-88, 108-136 (a.m.), 138-174, 380-512MHz
MODES: a.m., f.m.
SENSITIVITY: 68-88MHz = 0.6µV, 138-174MHz & 380-512MHz = 1.0µV f.m. 20dB S/N at 3kHz deviation; 108-136MHz = 2µV a.m. 20dB S/N at 60% modulation
SELECTIVITY: -6dB @ ±9kHz, -60dB @ ±15MHz
RESOLUTION: 5, 12.5 or 25kHz
IMAGE REJECTION:
IF STAGE: 455kHz, 10.7MHz
AUDIO OUTPUT: 300mW
SCAN RATE: 4 or 8 channels per second
SEARCH RATE: 4 or 8 channels per second
MEMORIES: 200
FEATURES: lockout, delay and priority channel, helical antenna
REVIEWED: Short Wave Magazine November 1987 (£1.65 back issue)
PRICE: £240*

Regency HX850E

TYPE: hand-held
COVERAGE: 75-106 or 60-90, 118-175, 406-496MHz
MODES: a.m., n.b.f.m.
SENSITIVITY: v.h.f. f.m. = 0.7µV, u.h.f. f.m. = 1.0µV both @ 12dB SINAD, v.h.f. a.m. = 1.0µV @ 10dB S/N
SELECTIVITY: f.m./a.m. ±7.5kHz @ 6dB

RESOLUTION: 5, 10 & 12.5kHz
IMAGE REJECTION:
IF STAGE: 21.4MHz, 455kHz
AUDIO OUTPUT: 10mW @ 10% or less t.h.d.
SCAN RATE: 12 channels per second
SEARCH RATE: u.h.f. = 7 seconds per MHz, v.h.f. =

9 seconds per MHz
MEMORIES: 20
FEATURES: NiCads, flexible antennas and 240V charger supplied.
REVIEWED:
PRICE: £280*

WHAT SCANNER

Black Jaguar BJ200 Mark III

TYPE: hand-held
COVERAGE: 26.30, 50-88, 115-178, 210-280, 360-520MHz
MODES: a.m., f.m.
SENSITIVITY: f.m. = 0.5µV for h.f. & v.h.f., 0.7µV for u.h.f. all 12dB SINAD, a.m. = 1.0µV for h.f. & v.h.f., 1.5µV for u.h.f. all 10dB SINAD
SELECTIVITY: 60dB ±20kHz
RESOLUTION: 5, 10, 12.5kHz
IMAGE REJECTION: more than 40dB
IF STAGE:
AUDIO OUTPUT: 250mW into 8Ω
SCAN RATE: 10 channels per second
SEARCH RATE:
MEMORIES: 16
FEATURES: priority and memory lockout on scan, selectable a.m./f.m.
REVIEWED: What Scanner Autumn 1990 (with SWM)
PRICE: £199

WIN 108

TYPE: hand-held
COVERAGE: 108-135.975MHz
MODES: a.m.
SENSITIVITY: 0.5µV @ 12dB SINAD
SELECTIVITY: -59dB @ 25kHz
RESOLUTION: 25, 50kHz
IMAGE REJECTION: -55dB
IF STAGE: 10.7MHz, 455kHz
AUDIO OUTPUT: 320mW at 10% t.h.d.
SCAN RATE: 10 channels per second
SEARCH RATE: 5 seconds per MHz at 25kHz steps
MEMORIES: 20
FEATURES: priority channel, display/hold, channel lockout, keyboard lock, external power and speaker jacks, display lighting
REVIEWED: Short Wave Magazine December 1988 (£1.65 back issue)
PRICE: £179

Uniden Bearcat 580XL

TYPE: mobile/base station
COVERAGE: 29-54, 118-174, 406-512MHz
MODES: a.m., f.m.
SENSITIVITY: h.f. & v.h.f. = 0.4µV, u.h.f. = 0.5µV all @ 12dB SINAD
SELECTIVITY: -55dB @ 25MHz
RESOLUTION: 5, 10, 12.5kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: 2.5W @ 10% t.h.d.
SCAN RATE: 15 channels per second
SEARCH RATE:
MEMORIES: 100
FEATURES: 2 second delay, lockout, priority scan
REVIEWED:
PRICE: £199*

Sony AIR-7

TYPE: hand-held
COVERAGE: 150kHz-2.19MHz, 76-136, 144-174MHz
MODES: a.m., w.b.f.m., n.b.f.m.
SENSITIVITY: f.m. = 2µV @ 20dB S/N, airband = 1.25µV @ 12dB SINAD, 144-174MHz = 0.5µV @ 12dB SINAD
SELECTIVITY:
RESOLUTION: 5, 9, 10, 25 or 50kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: 400mW into 8Ω
SCAN RATE:
SEARCH RATE:
MEMORIES: 10
FEATURES: key protect, backlit l.c.d. readout, priority channel
REVIEWED: Practical Wireless November 1986 (85p photocopy)
PRICE: £229

Revco RS-3000



TYPE: base station
COVERAGE: 26-32, 60-90, 118-180, 380-512MHz
MODES: a.m., n.b.f.m.
SENSITIVITY: v.h.f. & h.f. = 0.5µV, airband & u.h.f. = 1µV both 10dB S/N
SELECTIVITY:
RESOLUTION: 5, 12.5, 25kHz
IMAGE REJECTION:
IF STAGE: 21.4MHz, 455kHz
AUDIO OUTPUT: 1.5W @ 10% t.h.d.
SCAN RATE:
SEARCH RATE:
MEMORIES: 50
FEATURES: compact size, l.c.d. readout, priority memory channel
REVIEWED: Short Wave Magazine June 1988 (£1.60 back issue)
PRICE: £199.00*

Realistic PRO-2021

TYPE: base/mobile
COVERAGE: 68-88, 108-136, 138-174, 380-512MHz
MODES: a.m., f.m.
SENSITIVITY: 66-88MHz, 138-174MHz & 380-512MHz = 1µV, 108-136MHz = 2µV
SELECTIVITY: -6dB @ ±9kHz, -50dB @ ±15kHz
RESOLUTION: 5, 12.5 & 25kHz
IMAGE REJECTION:
IF STAGE: 10.7MHz, 455kHz
AUDIO OUTPUT: 300mW
SCAN RATE: 4 or 8 channels per second
SEARCH RATE:
MEMORIES: 200
FEATURES: Squelch control, mobile mounting bracket included, sockets for external antenna, speaker and tape socket
REVIEWED: Short Wave Magazine August 1988 (85p photocopy)
PRICE: £220*

AOR AR800E

TYPE: hand-held
COVERAGE: 75-105, 118-136, 140-174, 406-495, 830-950MHz
MODES: a.m., f.m.
SENSITIVITY: 75-105, 118-136 & 140-174MHz = 0.4µV, 406-495MHz = 0.5µV, 830-950MHz = 1µV all @ 12dB SINAD, 118-136MHz a.m. = 0.8µV @ 10dB S/N
SELECTIVITY: -23dB @ ±12.5kHz, -45dB @ ±25kHz
RESOLUTION: 5, 10, 12.5kHz (v.h.f.), 12.5kHz (u.h.f.), 25kHz (offset by 12.5kHz) on 830-950MHz
IMAGE REJECTION: -24dB @ 145MHz
IF STAGE: 21.4MHz, 455kHz
AUDIO OUTPUT: 140mW at 10% t.h.d.
SCAN RATE: 13 channels per second
SEARCH RATE: 7.5 seconds per MHz at 12.5kHz steps
MEMORIES: 20
FEATURES: NiCad battery pack and charger supplied, two helical antennas, illuminated l.c.d. readout and delay/hold function
REVIEWED:
PRICE: £169

Kenwood RZ-1

TYPE: base/mobile station
COVERAGE: 500kHz-905MHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: a.m. = 5µV @ 10dB S/N, n.b.f.m. = 6µV @ 12dB SINAD, 60-905MHz = 3µV, w.b.f.m. = 1µV
SELECTIVITY:
RESOLUTION: 5, 12.5, 20, 25kHz
IMAGE REJECTION:
IF STAGE: 45, 75, 10.7MHz
AUDIO OUTPUT: 2W into 8Ω @ 5% t.h.d.
SCAN RATE:
SEARCH RATE:
MEMORIES: 100
FEATURES: text store feature, picture symbols available on display
REVIEWED: Short Wave Magazine April 1988 (£1.65 back issue)
PRICE: £459

Sony ICF PRO-80

TYPE: hand-held
COVERAGE: 150kHz-108MHz (115.15kHz - 223MHz using FRG-80 converter)
MODES: w.b.a.m., n.b.a.m., f.m., n.b.f.m., s.s.b.
SENSITIVITY: l.w. & m.w. = 420µV, f.m. = 999µV 30dB S/N
SELECTIVITY: ±3.8kHz @ 50dB, ±400kHz @ 58dB for f.m.
RESOLUTION: 3, 5, 10, 50kHz plus fine tune
IMAGE REJECTION: 77dB (l.w., m.w., s.w., v.h.f.), 40dB (f.m.)
IF STAGE: 55.845MHz, 455kHz, 10.7MHz (f.m.)
AUDIO OUTPUT: 400mW at 10% t.h.d.
SCAN RATE:
SEARCH RATE:
MEMORIES: 40
FEATURES: converter supplied, soft case, shoulder belt, frequency handbook, key protect facility, fine tune control
REVIEWED: Short Wave Magazine March 1988 (£1.65 back issue)
PRICE: £299

Signal R-535

TYPE: base station
COVERAGE: 108-142.995, 220-379.995MHz
MODES: a.m.
SENSITIVITY: v.h.f. = 0.32µV, u.h.f. = 0.46µV both for 12dB SINAD
SELECTIVITY: ±25kHz @ 55dB
RESOLUTION: 5, 10, 25, 50, 100kHz (v.h.f.), 25, 50, 100, 500kHz, 1MHz (u.h.f.)
IMAGE REJECTION: v.h.f. = >55dB, u.h.f. = >25dB
IF STAGE: 21.4MHz, 455kHz
AUDIO OUTPUT: 360mW into 8Ω
SCAN RATE: 12 channels per second
SEARCH RATE: 2.5 seconds per MHz in 25kHz steps
MEMORIES: 60
FEATURES: connection of RS232 interface possible and portable operation available
REVIEWED:
PRICE: £254

Standard AX700



TYPE: base/mobile
COVERAGE: 50-904.995MHz
MODES: a.m., w.b.f.m., n.b.f.m.
SENSITIVITY: a.m. = 3µV @ 10dB S/N, n.b.f.m. = 1.5µV, w.b.f.m. = 1µV both for 12dB SINAD
SELECTIVITY:
RESOLUTION: 1, 5, 10, 12.5, 20, 25kHz
IMAGE REJECTION:
IF STAGE:

AUDIO OUTPUT: more than 1.8W in 8Ω @ 10% t.h.d.
SCAN RATE:
SEARCH RATE:
MEMORIES: 100
FEATURES: telescopic antenna supplied, l.c.d. readout, backlit display, spectral display
REVIEWED:
PRICE: £545

Uniden Bearcat 100XL

TYPE: hand-held
COVERAGE: 29-54, 118-174, 406-512MHz
MODES: a.m., f.m.
SENSITIVITY: h.f. = 0.4µV, v.h.f. = 0.8µV, u.h.f. = 0.5µV
SELECTIVITY: ±25kHz @ 55dB
RESOLUTION: 5, 10, 12.5kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: 480mW
SCAN RATE: 15 channels per second
SEARCH RATE: 25 frequencies per second
MEMORIES: 100
FEATURES: antenna, earpiece, a.c. adapter included
REVIEWED:
PRICE: £225*

Bearcat 210XW

TYPE:
COVERAGE: 30-50, 136-174, 406-512MHz
MODES: f.m.
SENSITIVITY: 30-50 & 136-174MHz = 0.3µV, 406-512MHz = 0.5V
SELECTIVITY: ±25kHz @ 55dB
RESOLUTION: 5kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: 1.5W r.m.s. into 8Ω @ 10% t.h.d.
SCAN RATE:
SEARCH RATE:
MEMORIES: 20
FEATURES: lockout facility, delay function, telescopic antenna supplied
REVIEWED:
PRICE: £169*

Bearcat 800XL

TYPE: mobile/base station
COVERAGE: 29-54, 118-174, 406-512, 806-912MHz
MODES: f.m.
SENSITIVITY: 29-54 & 136-174MHz = 0.3µV, 118-136MHz = 0.8µV, 406-512MHz = 0.5µV, 840-912MHz = 0.7µV
SELECTIVITY: -55dB @ ±25kHz
RESOLUTION: 5, 12.5, 25kHz
IMAGE REJECTION:
IF STAGE:
AUDIO OUTPUT: 1.5W @ 10% t.h.d.
SCAN RATE: 15 channels per second (rapid)
SEARCH RATE: 15 frequencies per second
MEMORIES: 40
FEATURES: priority channel, scan delay, direct channel access and channel lockout
REVIEWED: Short Wave Magazine March 1989 (£1.65 back issue)
PRICE: £257*

Icom IC-R1



TYPE: hand-held
COVERAGE: 100kHz-1.3GHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: a.m. = 1.6µV (2-25MHz) 0.79µV (25-905MHz) for 10dB S/N; n.b.f.m. = 0.79µV (2-25MHz) 0.4µV (25-905MHz) w.b.f.m. = 6.3µV (2-25MHz) 3.16µV (25-905MHz) for 12dB SINAD
SELECTIVITY: a.m. more than 15kHz/-6dB, n.b.f.m. more than 15kHz/-6dB, w.b.f.m. more than 150kHz/-6dB
RESOLUTION: 0.5, 5, 8, 9, 10, 12.5, 15, 20, 25, 30 or 50kHz
IMAGE REJECTION:
IF STAGE: 266, 7000-266, 7095MHz, 10.7MHz, 455kHz
AUDIO OUTPUT: 150mW @ 10% t.h.d.
SCAN RATE:
SEARCH RATE:
MEMORIES: 100
FEATURES: multi-scan function, built-in S-meter, built-in clock with timer
REVIEWED: Practical Wireless July 1990 (£1.65 back issue)
PRICE: £359

WHAT SCANNER

Icom IC R7000HF



TYPE: base station
COVERAGE: 25-999.999, 1025-1999.999MHz
MODES: a.m., f.m., s.s.b.
SENSITIVITY: 25-999.999MHz n.b.f.m. >0.5µV, f.m. >1.0µV both for 12dB SINAD, a.m. >1.0µV for 10dB S.N., s.s.b. >0.3µV both for 10dB S.N.
SELECTIVITY: f.m., a.m. = 7.5kHz @ -6dB, n.b.f.m. = 3kHz @ -6dB, f.m. 75kHz @ -6dB, s.s.b. = 1.4kHz @ -6dB
RESOLUTION: 100Hz min

IMAGE REJECTION: <-60dB
IF STAGE: 778.7 or 226.7, 10.7MHz, 455kHz
AUDIO OUTPUT: 2.5W
SCAN RATE: 2 or 7 channels per second
SEARCH RATE: not given
MEMORIES: 100
FEATURES: REVIEWED Short Wave Magazine December 1989 (£1.65 back issue)
PRICE: £895*

Uniden Bearcat UBC200XL

TYPE: hand-held
COVERAGE: 66-88, 118-174, 406-512, 806-956MHz
MODES: a.m., f.m.
SENSITIVITY: 66-88 & 406-512MHz = 0.3µV, 118-136 & 806-956MHz = 0.6µV, 136-174MHz = 0.4µV
SELECTIVITY: -55dB @ ±25kHz
RESOLUTION: 5kHz
IMAGE REJECTION: IF STAGE
AUDIO OUTPUT: 500mW max
SCAN RATE: 15 channels per second
SEARCH RATE: 25 frequencies per second
MEMORIES: 200
FEATURES: memory back-up, priority scan, l.c.d. readout, lockout
REVIEWED: PRICE: £229.00

Uniden Bearcat BC590XL

TYPE: mobile
COVERAGE: 29.54, 118-174, 406-512MHz
MODES: a.m., f.m.
SENSITIVITY: 29.54 & 136-174MHz = 0.4µV, 118-136MHz = 0.9µV, 406-512MHz = 0.5µV
SELECTIVITY: 55dB @ ±25kHz
RESOLUTION: 5kHz min
IMAGE REJECTION: IF STAGE
AUDIO OUTPUT: 2.5W @ 10% t.h.d.
SCAN RATE: 15 channels per second
SEARCH RATE: MEMORIES: 100
FEATURES: lockout, telescopic antenna included
REVIEWED: PRICE: £199.00*

ASA AIR PRO II

TYPE: hand-held
COVERAGE: 520kHz-1.65MHz, 88-108, 118-136, 162.5MHz
MODES: a.m., f.m.
SENSITIVITY: a.m. = 4.7mV/m @ 20dB SINAD, f.m. = 4µV
SELECTIVITY: a.m. = 10dB, f.m. = 25dB
RESOLUTION: IF STAGE
IMAGE REJECTION: a.m. = 25dB, f.m. = 20dB
IF STAGE: AUDIO OUTPUT: 170mW
SCAN RATE: SEARCH RATE: MEMORIES: 100
FEATURES: l.c.d. readout, external power supply port
REVIEWED: PRICE: £60*

Bearcat 100FB

TYPE: hand-held
COVERAGE: 66-89, 138-174, 406-512MHz
MODES: f.m.
SENSITIVITY: 66-88 & 138-174MHz = 0.6µV, 406-512MHz = 1µV both @ 12dB SINAD
SELECTIVITY: 50dB @ ±25kHz
RESOLUTION: 5 & 12.5kHz
IMAGE REJECTION: IF STAGE
AUDIO OUTPUT: 300mW
SCAN RATE: 15 channels per second
SEARCH RATE: 15 channels per second
MEMORIES: 16
FEATURES: low battery warning lamp and lockout facility
REVIEWED: Practical Wireless September 1982 (reprint available @ 85p)
PRICE: £253 when new, now second-hand

Fairmate HP-100E MkII



TYPE: hand-held
COVERAGE: 8-600, 830-1300MHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: 8-550, 805-1300MHz less than 0.5µV for 12dB SINAD, 25-550MHz a.m. less than 2µV, w.b.f.m. less than 3µV
SELECTIVITY: RESOLUTION: 5-995kHz selectable
IMAGE REJECTION: IF STAGE: 561.225, 58.075MHz, 455kHz
AUDIO OUTPUT: over 100mW for 10% t.h.d.
SCAN RATE: 40 channels per second
SEARCH RATE: MEMORIES: 1000
FEATURES: NiCads, two antennas, carry case, shoulder strap, belt clip, d.c. cable and earpiece provided
REVIEWED: Short Wave Magazine February 1990 (£1.65 back issue)
PRICE: £299.00

Icom IC-R9000

TYPE: base station
COVERAGE: 100kHz-1.9998GHz
MODES: a.m., n.b.f.m., w.b.f.m., s.s.b., f.s.k., c.w.
SENSITIVITY: 100-500kHz = 0.5µV s.s.b., c.w., f.s.k. 3.2µV a.m., 500kHz-1.799MHz = 1.0µV a.m., 6.3µV, 1.8-29.999MHz = s.s.b., c.w., f.s.k. 0.16µV a.m., 1.0µV, 30-999.999MHz = s.s.b., c.w., f.s.k. 0.32µV a.m., 1.4µV n.b.f.m. 0.5µV w.b.f.m., 1.4µV, 1-1.2399GHz = s.s.b., c.w., f.s.k. 0.63µV a.m., 4.0µV n.b.f.m., 1.0µV w.b.f.m., 4.0µV, 1.24-1.2999GHz = s.s.b., c.w., f.s.k. 0.32µV a.m., 2.0µV n.b.f.m., 0.5µV w.b.f.m., 2.0µV, 1.3-1.5999GHz = s.s.b., c.w., f.s.k. 0.63µV a.m., 4.0µV n.b.f.m., 1.0µV w.b.f.m., 4.0µV, 1.6-1.9998GHz = s.s.b., c.w., f.s.k. 1.0µV a.m., 5.6µV n.b.f.m., 1.4µV w.b.f.m., 5.6µV
SELECTIVITY: s.s.b., c.w., f.s.k. = more than 2.4kHz/-6dB, a.m. = more than 6kHz/-6dB, n.b.f.m. = more than 15kHz/-6dB, w.b.f.m. = more than 150kHz/-6dB
RESOLUTION: not known
IMAGE REJECTION: IF STAGE: 48.79376-48.8, 776.60001-778.7, 278.60001-278.7, 10.7MHz, 455kHz
AUDIO OUTPUT: more than 2.5W into 8Ω @ 10% t.h.d.
SCAN RATE: SEARCH RATE: MEMORIES: 100
FEATURES: REVIEWED Short Wave Magazine April 1989 (£1.65)
PRICE: £3995.00

Icom IC-R100

TYPE: mobile/base station
COVERAGE: 100kHz-1.856GHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: 500kHz-1.6295MHz = a.m. 3.2µV, 1.63-49.9995MHz = a.m. 1.6µV n.b.f.m., 0.56µV, 50-904.9995MHz = a.m. 0.56µV n.b.f.m., 0.2µV w.b.f.m., 0.63µV, 905-1380.4875MHz = a.m. 1.0µV n.b.f.m., 0.32µV w.b.f.m., 0.79µV, 1.3805-1.8GHz = a.m. 1.4µV n.b.f.m., 0.45µV w.b.f.m., 1.1µV
SELECTIVITY: a.m. = more than 6kHz/-6dB, n.b.f.m. = more than 15kHz/-6dB, w.b.f.m. = more than 180kHz/-3dB
RESOLUTION: 1, 5, 8, 10, 12.5, 20, 25kHz
IMAGE REJECTION: IF STAGE: AUDIO OUTPUT: more than 2.5W at 10% t.h.d.
SCAN RATE: SEARCH RATE: MEMORIES: 100
FEATURES: REVIEWED: PRICE: £485

Realistic PRO-2005

TYPE: base station
COVERAGE: 25-520, 760-1300MHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: w.b.f.m. 25-520 & 760-1100MHz = 3µV, 1100-1300MHz = 10µV, n.b.f.m. 25-520 & 760-1100MHz = 0.5µV, 1100-1300MHz = 3µV, a.m. 25-520 & 760-1100MHz
SELECTIVITY: n.b.f.m. & a.m. = ±9kHz -6dB, ±15kHz -50dB, w.b.f.m. = ±150kHz -6dB, ±300kHz -50dB
RESOLUTION: 5kHz min
IMAGE REJECTION: 610MHz @ 70MHz, 60dB, 608MHz @ 1000MHz 60dB
IF STAGE: AUDIO OUTPUT: 1.3W
SCAN RATE: 8 or 16 channels per second
SEARCH RATE: 8 or 16 frequencies per second
MEMORIES: 400 permanent, 10 temporary
FEATURES: REVIEWED Short Wave Magazine September 1989 (£1.65 back issue)
PRICE: £340*

Uniden Bearcat UBC50XL

TYPE: hand-held
COVERAGE: 66-88, 136-174, 406-512MHz
MODES: a.m., f.m.
SENSITIVITY: 66-88MHz = 0.4µV, 136-174 & 406-512MHz = 0.7µV all for 12dB SINAD
SELECTIVITY: -55dB @ ±25kHz
RESOLUTION: IF STAGE: 561.225, 58.075MHz, 455kHz
IMAGE REJECTION: IF STAGE: AUDIO OUTPUT: 400mW into 8Ω
SCAN RATE: 10 channels per second
SEARCH RATE: MEMORIES: 10
FEATURES: low battery indicator, memory back-up, lockout
REVIEWED: PRICE: £100*

Regency MX7000

TYPE: Base station
COVERAGE: 25-550, 800-1300MHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: n.b.f.m. = 0.4µV, w.b.f.m. = 1.0µV both @ 12dB SINAD, a.m. = 0.8µV @ 10dB S/N
SELECTIVITY: n.b.f.m. ± 7.5kHz, w.b.f.m. = ±5kHz, a.m. = ±5kHz all @ 6dB
RESOLUTION: 5, 12.5 & 25kHz
IMAGE REJECTION: -50dB
IF STAGE: 750, 45.03, 5.5, 455kHz
AUDIO OUTPUT: 1W @ 10% t.h.d.
SCAN RATE: 5 channels per second
SEARCH RATE: 6 seconds per MHz
MEMORIES: 20
FEATURES: tuning dial as well as keypad, priority channel, mains adapter and mounting bracket available as extras.
REVIEWED: PRICE: £399*

AOR AR-3000

TYPE: base station
COVERAGE: 100kHz-2.036GHz
MODES: a.m., n.b.f.m., w.b.f.m., s.s.b., c.w.
SENSITIVITY: 100kHz-2.5MHz s.s.b., c.w. = 1.0µV a.m. = 3.2µV, 2.5MHz-1.8GHz s.s.b., c.w. = 0.25µV, a.m. = 1.0µV, n.b.f.m. = 0.35µV, w.b.f.m. = 3.0µV, 1.8-2GHz s.s.b., c.w. = 0.75µV, a.m. = 3.0µV, n.b.f.m. = 1.25µV, w.b.f.m. = 3.0µV
SELECTIVITY: s.s.b. & c.w. = 2.4kHz/-6dB, 4.5kHz/-60dB, a.m. & n.b.f.m. = 12kHz/-6dB, 25kHz/-70dB, w.b.f.m. = 180kHz/-6dB, 550kHz/-50dB
RESOLUTION: IF STAGE: AUDIO OUTPUT: 1.4W into 4Ω 10% t.h.d., 0.7W into 8Ω 10% t.h.d.
SCAN RATE: 20 channels per second
SEARCH RATE: 20 steps per second
MEMORIES: 400
FEATURES: REVIEWED Short Wave Magazine January 1990 (£1.65 back issue)
PRICE: £765.00

Uniden Bearcat UBC760XL

TYPE: mobile/base station
COVERAGE: 66-88, 108-174, 350-512, 806-956MHz
MODES: a.m., f.m.
SENSITIVITY: 66-88MHz = 0.3µV, 136-174 & 406-512MHz = 0.4µV, 108-136MHz = 0.6µV, 806-956MHz = 0.8µV
SELECTIVITY: -55dB @ ±25kHz
RESOLUTION: IF STAGE: AUDIO OUTPUT: 2W @ 10% t.h.d.
SCAN RATE: 15 channels per second
SEARCH RATE: MEMORIES: 100
FEATURES: backlit controls, options include signal booster pre-amplifier, CTCSS tone squelch decoder
REVIEWED: PRICE: £235.00

AOR AR900

TYPE: hand-held
COVERAGE: 108-174, 220-380, 406-470MHz, 830-950MHz
MODES: a.m., f.m.
SENSITIVITY: 0.4µV v.h.f. hi & lo, 0.8µV v.h.f. air, 0.5µV u.h.f., 1µV 800MHz
SELECTIVITY: RESOLUTION: 5, 10, 12.5, 25kHz
IMAGE REJECTION: IF STAGE: AUDIO OUTPUT: 120mW @ 10% t.h.d.
SCAN RATE: 15 channels per second
SEARCH RATE: MEMORIES: 100
FEATURES: supplied with NiCads, mains powered charger, two flexible antennas
REVIEWED: PRICE: £199

Cobra SR925

TYPE: base station
COVERAGE: 29-54MHz, 118-174MHz, 406-512MHz
MODES: a.m., n.b.f.m., w.b.f.m.
SENSITIVITY: 0.3µV @ 29-54 & 136-174MHz, 0.5µV @ 406-512MHz, 0.7µV @ 118-135.975MHz
SELECTIVITY: -55dB @ ±25kHz
RESOLUTION: 5kHz
IMAGE REJECTION: IF STAGE: AUDIO OUTPUT: 1W into 8Ω at 10% t.h.d.
SCAN RATE: SEARCH RATE: MEMORIES: 16
FEATURES: REVIEWED Short Wave Magazine April 1990 (£1.65 back issue)
PRICE: £150*

Unless you happen to live very close to the borders of another country 'International Scanning at u.h.f.' sounds almost like a contradiction in terms. The very characteristics which make v.h.f. and u.h.f. so conveniently re-useable, by definition make it impossible to listen to what is happening on those channels more than 50 or so miles away.

Yes, I know that there are many fellow listeners who will claim QSLs from much greater distances, but some of us like to listen to the sort of action channels that are not famed for long distance propagation. Police, fire, utility channels have their devotees on both sides of the Atlantic it seems.

And even in the relatively close confines of multi-national Western Europe, language barriers limit any truly international scanning possibilities.

On top of all that, regulations in most countries place restriction on what you may, or more often may NOT, listen to!

As a keen scanner user and regular subscriber to a number of periodicals and magazines, I read every month about the USA and what frequencies and equipment is in use. Readers in the USA may be surprised that details which are regarded as being in the public domain in the States are seen quite differently and often restricted by law in other countries. To see frequency information in print, freely available and published in magazines would bring *angst* to most bureaucrats in Europe.

I was keen to hear some of the station based in places which were only names on a map, or at best, seen in the movies.

A trip to California was too good an opportunity to miss. But how was I going to be able to fulfil this ambition to hear local telecommunications channels?

The cost of buying equipment locally to use for a short period ruled out that possibility and scanners are not the sort of thing you can rent from Hertz (however appropriate it sounds!).

There was nothing else for it. Somehow I would have to take a scanner with me from the UK.

International Scanning in the UHF Bands

David Simpson

Dangerous Cargo?

Six hours before the flight is due to depart from London's Heathrow airport to San Francisco is hardly the time to be agonising on whether you ought to take a scanner with you!

I was aware that certain states have anti-scanner laws but my understanding was that California is reasonably liberal. Perhaps another contributor in the US might write an article on which states permit scanners and which don't.

The increased problems of security on all flights has got to be a very important consideration. My carrier to the West Coast was to be Pan-Am which, since the Lockerbie disaster is now reputedly one of the most security conscious at London's Heathrow, and almost as rigorous as the legendary El Al. Clearly there would only be one way to find out whether a scanner scheduled for the most innocent and inoffensive of uses could make its way past security. Would I be targeted as a potential terrorist? Might it look too much like a walkie-talkie ready to be used to coordinate some diversion to a Middle East destination? I would soon find out.

What about bringing the unit back into the UK? Customs people see all sorts of strange items, but I did not really fancy going through

any sort of long and complex explanation - leading may be to the confiscation of my scanner. Would I be allowed to take it into the USA? Attempts to check with Her Majesties' Customs and Excise department by telephone the evening before leaving proved impossible and so the decision had to be made to 'try it and see'.

Old Faithful

The next decision was a little easier. The Icom R7000 is not made for portability and for that reason is virtually built in to the monitoring post. An RS3000, which may not be familiar to American readers but which incorporates a.m., essential for listening to UK mobile systems could be used in the rental car, as could the Yaesu FRG-9600. Both were rejected on the grounds of being less adaptable than a hand-portable.

The next decision... which hand-held unit?

A newly acquired Fairmate HP100 (which appeared in the US as the AR1000) seemed to present too much in the way of potential trouble at the Customs posts, despite the attraction of 1000 memories and a coverage of 25-1300MHz! I could not bear the possibility that this unit might be impounded at Customs either on the way out or re-entering the UK.

Only one option was left open to me. The old faithful Bearcat UBC100XL distributed

by Uniden, Belgium, and apparently adapted for the European market, has only 16 memories and a limited frequency coverage. It might not win prizes for sensitivity, performance and coverage but conversely a temporary impounding by the authorities would be less financially damaging as it is now several years old.

Much of Europe uses the band 66-87MHz for mobile radio services and the UBC has that band together with the airbands (which it switches to a.m. automatically), the v.h.f. band 136-174MHz and 406-512MHz u.h.f. As an aside, the majority of mobile services on the 66-87MHz bands in the UK use a.m., so the UBC100XL is really only suitable for the other three bands listed.

My interest as already stated is mainly in the utilities channels which I felt would be adequately covered by the Bearcat and knowing the USA to be predominately f.m., the choice was made.

Don't attract attention

At the airport the security was reassuringly extensive, but not inconveniently so. The Bearcat got no more than a cursory glance from the first stage of Pan-Am security. So far so good.

It was spotted in my hand baggage on the X-Ray machines at the second stage. I was asked to switch it on, which brought up the l.c.d. and seemed to satisfy the security requirement.

I had expected it to be asked to surrender it during the flight; this has happened to me on domestic UK flights in the past when carrying two-way radio equipment. In any event I had no intention of using it in flight. We Brits do tend to be more reserved than our American cousins and don't usually like to attract attention to ourselves by doing anything out of the 'ordinary' and quite apart from anything else, I am very conscious of the possibilities of local oscillator interference to sensitive aeronautical systems.

Through to the departure lounge without incident.

I had plenty of time before boarding and sought out the UK customs desk which is

AR2500 & AR2800 = Versatile receivers from AOR...

Base - mobile scanning receivers featuring coverage from shortwave to microwaves. All mode operation AM, FM (narrow), FM (wide) and built-in BFO for SSB (USB, LSB and CW)

Massive memory storage backed up permanently with an EEPROM so no battery is required. Operation is from a nominal 13.8V DC supply (power supply included).

SSB is used by many services especially on shortwave (including Amateur band and oceanic airband) to extend the operational coverage of their transceivers. Its inclusion on these receivers isn't just an added bonus but a positive asset.

The BFO allows selection of either side-band and the fine shift control ensures the very best audio quality.

The AR2500 was conceived in the USA where listeners desire computer control via the RS232 port at a budget price. IBM-PC based software (written by G4SGI) should be available toward the end of 1991.

The AR2500 has a massive memory capacity (*Elephant memory*) and fast *turbo speed* search and scan. There are 1984 memories (62 banks x 32 ch) and 16 search banks.

The AR2500 covers 5 MHz to 550 MHz and 800 MHz to 1300 MHz.

The AR2800's strong point is superior SSB/CW receive performance and versatility.

Amateur band CW reception is of a crisp and clean tone. The dream of listening to long distance communications from your home (with an external aerial) is now a reality.

The AR2800 is *user friendly* and employs a conventional memory channel and search bank layout (similar to the popular AR2000).

There are 1000 memories and 10 search banks. An internal rechargeable NiCad battery is now included to permit operation away from the home and car. The AR2800 covers 500 kHz to 600 MHz and 800 MHz to 1300 MHz.

☆AR2500

Coverage: 5 - 550 & 800-1300MHz
Channel steps: 5, 12.5 & 25kHz
Modes: AM, FM(N), FM(W), SSB, CW
Power: 11 - 16V DC
Memories: 1984 (61 x 32)
Search bands: 16
Search/scan speed: Up to 36 channels or increments per second
Aerial input: 50 OHM BNC
Size: 150 x 55 x 180 mm
Weight: 650g

☆AR2800

Coverage: 500kHz - 600MHz & 800-1300MHz
Channel steps: Programmable in 5 & 12.5kHz upto 995kHz
Modes: AM, FM(N), FM(W), SSB, CW
Power: 11 - 16V DC
Memories: 1000 (100 x 10)
Search bands: 10
Search/scan speed: Up to 20 channels or increments per second
Aerial input: 50 OHM BNC
Size: 150 x 55 x 180 mm
Weight: 1050g

AR2500 R.R.P. £419.00 inc. VAT
AR2800 R.R.P. £395.00 inc. VAT
Carriage by post £5.00 extra

Each set is supplied with:

- ✓ Mains power supply
- ✓ Telescopic aerial
- ✓ Mobile mount
- ✓ DC lead
- ✓ Operating manual

*Please send S.S.A.E.
(34p) for detailed
leaflets and full price
list - thank you.*



AOR™ AOR (UK) Ltd.

Room 2, Adam Bede High Tech Centre,
Derby Road, Wirksworth, Derbys. DE4 4BG.
Tel: 0629 - 825926 Fax: 0629 - 825927

E&OE

RADIO SHACK for SCANNERS AND ACCESSORIES

SPECIAL PRICE! PRO-2006 (£329.95) £249.95 until Christmas PC Software for PRO-2006 available soon!

Pro-38	10 Channel Handy Scanner with free telescopic antenna as well as flexi	£79.95	AR-2800	Base version of the AOR-2000	£395.00
Pro-35	100 Ch Handy Scanner with free telescopic antenna as well as flexi	£179.95	AR-3000	All Mode Scanner, 100kHz-2036 MHz	£765.00
Pro-37	200 Ch Handy Scanner with free nicads & charger, value £23.49	£229.95	ACEPAC3	IBM-PC Software to control AR-3000	£119.00
Pro-2022	200 Ch AC/DC Scanner with free mobile antenna	£179.95	IC-R1	100kHz-1300 MHz handy Scanner, miniature size	£369.00
Pro-2024	60 Ch AC Scanner (was £179.95) with free frequency guide	£99.95	IC-R100	High Performance Base/Mobile Scanner	£485.00
Pro-2006	400 Ch AC/DC scanner 1300 MHz (£329.95)	£249.95	IC-R7000	25-2000MHz High Performance Receiver/Scanner	£875.00
AR-950	100 Ch Base/Mobile Scanner with free mobile antenna	£249.00	IC-R7100	25-2000MHz High Performance Receiver/Scanner 1000 memories	£1040.00
AR-2000	1000 Ch handy Scanner 0.5-1300 MHz with free frequency guide	£259.00	IC-R9000	The Ultimate	CALL US
AR-2500	The latest from AOR	£395.00	MS-1000	Nevada Base Scanner	£279.00

73s Terry Edwards G3STS

188 BROADHURST GARDENS, LONDON, NW6 3AY (Just around the corner from West Hampstead Station on the Jubilee Line) Tel: 071-624 7174 Fax: 071-328 5066

0692-650077

EASTERN COMMUNICATIONS

**CAVENDISH HOUSE
HAPPISBURGH
NORFOLK**



AOR AR2800 Base/mobile scanning receiver featuring coverage from shortwave to microwaves 500kHz-600MHz & 800MHz-1300MHz. All mode AM, FM-N, FM-W, and built-in BFO for USB, LSB, CW. 1000 memories and 10 search banks. Operates from 13.8V DC. Supplied with AC adaptor, DC lead, mobile mount and telescopic aerial. £395

PHONE FOR LATEST PRICES



AOR AR3000, Unique top of the range wide band scanning receiver. All mode AM, FM-N, FM-W, USB, LSB, CW. Frequency coverage is 100kHz-2036MHz with no gaps. Supplied with telescopic aerial, 13.8V DC lead, and AC power



AOR AR2000. Hand-held wide band scanning receiver. Improved specification. Continuous coverage 500kHz-1300MHz. AM, FM-N, & FM-W modes. 1000 memories and 10 search banks. Supplied with internal nicads, or can be powered by dry cells. Power and charge from a cigar lighter socket with lead supplied. AC charger and case included. £259

For the largest selection of aerials, receivers, transceivers and accessories, visit the UK's largest amateur radio showroom. We also offer a 'next day' mail order service.

APPOINTED
DEALERS FOR
**KENWOOD
ICOM
YAesu**



EVERYTHING FOR THE RADIO AMATEUR, + FAX, PHONES, COMPUTERS, ANSWERING MACHINES & CAR PHONES
RETAIL SHOWROOMS OPEN TUESDAY - FRIDAY 9.00 - 5.30 - SATURDAY 9.00 - 4.00



International Scanning in the UHF Bands

there really to assist non-EEC visitors to recover local taxes paid whilst in Britain. I explained to the helpful young customs officer that I did not relish the possibility of spending my first few hours back in England arguing that UK tax had already been paid on my equipment; I could foresee difficulties in explaining what the equipment might be used for, etc.

He understood my reasoning and wanted to see the scanner. Was it the sort of thing that you could listen to the pilots of aircraft, he asked. The easiest thing to do was agree that it could be used for exactly that.

In that case he could see no problem in bringing the equipment back into the country, and went to find a colleague to confirm his judgement. How long had I owned it, the older customs officer wanted to know, and how much was it worth?

Finally, they agreed that I shouldn't have any problems bringing it back into the UK.

They obviously felt the same way I did about the vagueness of this guarantee and clearly shared my belief in the old law that 'waht can go wrong, will'. Paul, the young customs officer, and I took the precaution of exchanging details so that he could vouch that the scanner was mine, in case I should get arrested for illegal importation!

It may not be elegant but it works

Within hours of arriving in wonderful San Francisco, I was spotting SFPD cars with u.h.f. antennas and also high gain antennas which I suspected were for 850MHz data systems.

At the first opportunity, having remembered to bring the deaf-aid type earpiece to

minimise irritation to my travelling companion, I searched around the standard u.h.f. bands at 450/460MHz.

Lots of interesting traffic, although the often-cited 'two nations divided by a common language' came to mind as I tried to listen to West Coast accents talking rather quickly in jargon and radio shorthand. How could I tell what I was listening to? The easy familiarity of listening through the channels is jarred by lack of knowledge of geography, call signs and all the other characteristics that are second nature on home ground.

At first it seemed that it could be impossible to find out 'who's who' in the limited time available. I did not know the solution to this problem.

I had a bigger concern. The NiCad batteries in the Bearcat would not last forever, and of course the UK has a 240V supply system whereas the USA uses 110V. I knew before leaving the UK that having no 110V battery charger meant that I would have to make some other arrangements. Users of the Bearcat 100XL will know that there is a small plastics cover to the battery compartment held on by two small screws. Long ago these on my unit had become worn and the battery cover distorted so I was very disinclined to undo the panel and allow the use of throw-away batteries. I would reserve that possibility 'till the last possible moment.

Could I find an answer to both my problems? The Bay Area Yellow Pages were not hugely helpful in locating a scanner dealer or a Uniden agent in San Francisco.

Where were all the scanner dealers I had expected to find in that great conurbation?

A visit to the only Uniden

dealer I could find in the San Francisco area was a little disappointing. Perhaps my expectations were too great, but I found a relatively small selection of scanning equipment in a shop which was more geared to CB and computer games. Maybe specialist stores exist and admittedly my time available prevented me from exploring into the more distant suburbs. I don't see any adverts in magazines such as *Monitoring Times*, and I couldn't locate a scanner store in Los Angeles.

I did, however, find the answers to my problems at the same store. I figured that the charging adaptor provided with the Bearcat gives 12V d.c. so I bought a connector lead to power the Bearcat from the cigar-lighter in the car. Even as I write that I can hear pens going to paper while purists get ready to tell me that ten good reasons why this should not be done. Incidentally, the Uniden dealer that I bought the lead from knew what I planned to use it for, but admitted that he did not know whether it would work or not.

My innocent reply is *that it works*.

My other purchase was *The Bay Area Scanner Book* published by the Base Station Inc, 1839 East Street, Concord, CA 94520. It is easy to use and well laid out; without it I would have taken me months, even if I had ever thought to listen around 488MHz where most of the UK mobile radio bands finish at 470MHz. Besides, the listing even told me the right channels to listen to in my part of town, and lots more. Its only shortcoming for me was that it did not also cover my next port of call, i.e. the

Los Angeles area. Well, in fairness it is called *The Bay Area Scanner Book*.

After that my main problem, of course, was deciphering what was being said and which call sign referred to what. Just the same problem as going to a different area in the UK for the first time except that no similar frequency listings exist in the UK, since it is an offence under the Wireless Telegraphy Act to listen to transmissions for which the receiver is unlicensed - in practical terms, anything except broadcast, CB and amateur bands.

It was also quite amazing for a UK visitor to see the enormous amount of radio equipment around and things like the radio tower (Mt Sutro?); structures of that height are generally broadcast stations in this country and I would be interested to know what it is used for.

One other slight disappointment was that frequency limitations of the European Bearcat prevented me from listening to the famous California Highway Patrol (CHP), who utilise the 40MHz band (presumably to compensate for the terrain and distances between centres of population).

The whole experience was fascinating, and left me wondering whether any other readers had taken scanners on an international trip? Some enterprising body might arrange to hire scanners, who knows? In any case, I hope that these notes will be of assistance to anyone planning to do the same thing.

Did I have any problem re-entering the UK with my scanner? Not a bit. Nobody asked about it at all.

Would I do it again?

I can hardly wait and the first thing I'll buy is the local frequency list!

SCANNER OWNERS

★ Listen in when you are 'out' with the amazing AUTO-VOX ★
Connect to any receiver with a swelch control and the AUTO-VOX will automatically switch your tape recorder on and off as signals are detected. A MUST for all scanner owners.
★ Return to a neatly compressed tape of all the action ★ The AUTO-VOX may be fitted directly into larger scanners or recorders, taking its power from the rig itself, or housed separately in the project box supplied. Supplied as a kit with all parts and instructions or ready built and tested.
KIT £12.50 AUTO-VOX BUILT £25.00.

Send a SAE for full details and prices of all our Scanner Upgrades.


RADIO RESEARCH (SWM), 3 Pasture Close, Whitmore, Staffs ST5 5DO

© PW PUBLISHING LTD. 1991.

Copyright in all drawings, photographs and articles published in *What Scanner* is fully protected and reproduction or imitation in whole or in part is expressly forbidden. All reasonable precautions are taken by *What Scanner* to ensure that the advice and data given to our readers is reliable. We cannot however guarantee it and we cannot accept legal responsibility for it. Prices are those current as we go to press. *What Scanner* is published by PW Publishing Ltd., Enefco House, The Quay, Poole Dorset BH15 1PP.



TURN YOUR SURPLUS RIG INTO

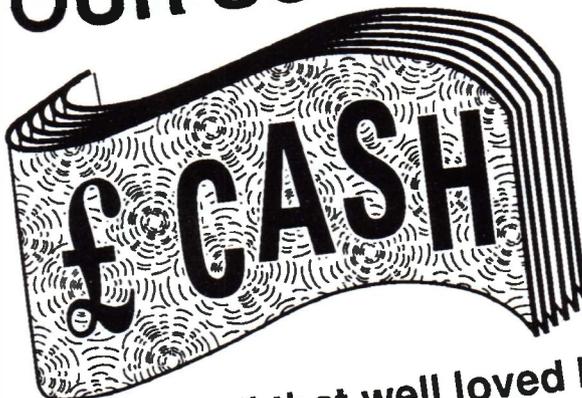

Why wait weeks to sell that well loved but surplus FT101 or whatever. If you have decided you must part - Make a quick clean break - CALL US.

Come and see London's Best selection of new and used ICOM, Yaesu, Kenwood, Standard, JRC, AOR and all leading makes.

Opening Hours:


Monday-Friday 8.30-6.00pm Saturday 9.00-3.00pm

NEW Reserved car parking at rear of showroom. ALL EASY TERMS ARE BASED ON AN APR OF 34.4%

C.M.HOWES COMMUNICATIONS

Mail order to: EYDON, DAVENTRY
NORTHANTS NN11 6PT
Tel: 0327 60178

ACTIVE ANTENNA FOR SCANNERS

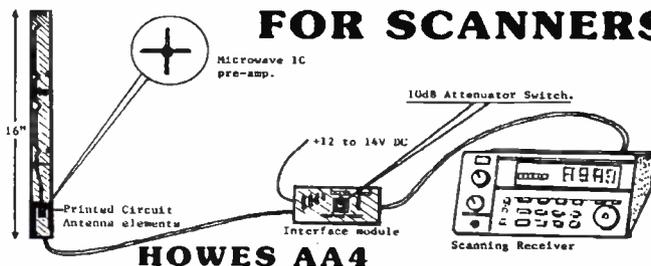

The **HOWES AA4** Active Antenna gives full coverage from 25 to 1300MHz. It is designed to be the ideal solution for those requiring a compact, broadband antenna for use with scanning receivers. The AA4 features advanced technology with a low noise microwave IC amplifier.

- ★ Fully broad-band covering 25 to 1300MHz.
- ★ Low noise microwave IC (NF <3dB). Over 15dB gain. IP3 +15dBm.
- ★ Coax powering 12 to 14V DC at less than 20mA.
- ★ 10dB switched attenuator on the receiver interface board.
- ★ 16 inches long, 1.2 inches wide. Easy to build kit or ready built modules.

If your scanner reception could benefit from the addition of a remotely located antenna, or you would like a much neater, more compact alternative to the ugly disccone types, then the **HOWES AA4** could be just the job! You can read the review in the November '90 Short Wave Magazine. Excellent performance in a small space!

AA4 Kit: £19.80

Assembled PCB modules: £26.80

AA2 ACTIVE ANTENNA for 150kHz to 30MHz

The **HOWES AA2** is the active antenna to use for general coverage HF reception. Broad-band performance that does not tail off at the higher frequencies. The neat, compact answer for those with limited space, holiday use, mobile operation etc. Two selectable gain settings, local or coax powering (12 to 14V). IP3 +38dBm. Easy to build and much liked by customers!

AA2 Kit: £8.50

Assembled PCB: £12.90

HF SSB and CW RECEIVERS

Our range of simple, but very effective receivers opens up the world of long distance radio communications for a very modest outlay. Most of the kits listed below are designated for use on various amateur bands. Give us a ring to discuss your requirements for frequencies not shown here.

The kits contain the electronics to build the receivers. "Hardware packages" contain the mechanical items (case, dial, knobs, sockets etc) to go with the "works" supplied in the basic kit. In addition, all our amateur band receivers have matching transmitters to suit the Novice and full amateur licence. These can be combined with other kits to form complete transceiver projects.

SSB/CW RECEIVERS	Kit	Assembled PCB
DXR10 3 Band (10,12 & 15M) for DX amateur work	£26.60	£39.90
DcRx54 4.45MHz Aircraft band (rescue etc)	£15.90	£22.70
DcRx20, 40 or 80M Single band amateur receivers.	£15.90	£22.70

DXR10 Hardware package: £14.90

DcRx Hardware package: £16.50

RECEIVER ACCESSORIES

CBA2 Buffer to enable use of DFD5 counter	£5.90	£9.50
CSL4 Sharp, dual bandwidth (SSB & CW) filter	£10.50	£17.40
DCS2 "S Meter" kit for above receivers	£9.20	£13.80
DFD5 Digital frequency counter/display	£41.50	£64.50
XM1 Crystal Calibrator, 8 marker frequencies	£16.90	£22.80

CV100 - ADD SHORTWAVE TO YOUR SCANNER!

This kit converts 1 to 40MHz up to 101 to 140MHz so you can tune these frequencies with a normal VHF scanner. No mods to the radio are needed.

CV100 kit: £26.50

Assembled PCBs: £37.90

PLEASE ADD £1.20 P&P to your total order value.

HOWES KITS are produced by a professional RF design and manufacturing company. They contain a good quality printed circuit board with screen printed parts locations, full clear instructions and all board mounted components. Sales and technical advice are available by phone during office hours. Please send an SAE for our free catalogue or specific product data sheets.

73 from Dave G4KQH, Technical Manager.


MARTIN LYNCH

G4HKS

THE AMATEUR RADIO EXCHANGE CENTRE

286 Northfield Avenue, Ealing, London W5 4UB. Tel: 081 566 1120 Fax: 081 566 1207

FOR THE
LARGEST
SELECTION OF
USED
RECEIVERS,
SCANNERS
AND
ACCESSORIES,
LOOK NO
FURTHER. FOR
THE LATEST
NEW MODELS -
WE HAVE
THOSE AS
WELL!!

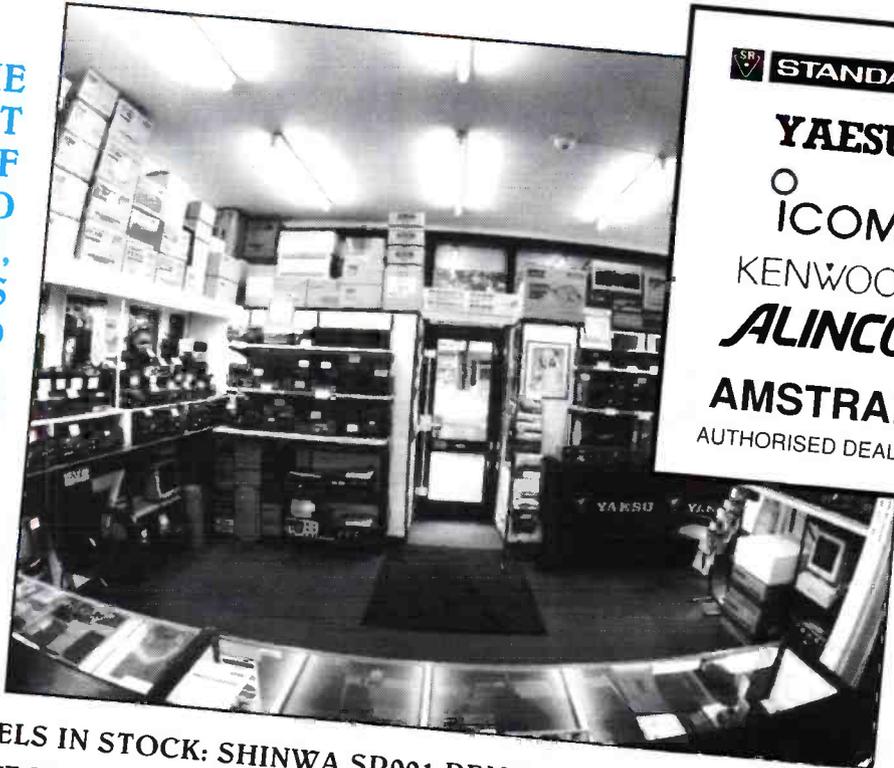

SR STANDARD

YAESU

ICOM

KENWOOD

ALINCO

AMSTRAD

AUTHORISED DEALER

★ LATEST MODELS IN STOCK: SHINWA SR001 REMOTE SCANNER ★ NRD 535 RECEIVER ★ LOWE HF225 RECEIVER ★ KENWOOD R5000 ★ YUPITERU MVT-7000 HAND HELD SCANNER ★ AOR2000/AOR2500/AOR2800/AOR3000 SCANNERS ★ ICOM ICR7000HF/ICR72E/ICR7100/ICR1/ICR100 ★ PLUS MANY MORE, including a MASSIVE selective of USED RECEIVERS AND ACCESSORIES - ALL FULLY GUARANTEED. ★

A full range of accessories are always available, including Pre-amps for hand held/base scanners, Antennas including "ACTIVE" variations, CONFIDENTIAL FREQUENCY BOOKS, ERA Micro-reader, RS232 Display, BPF1 filters, the list goes on forever!

All the equipment is wired for instant permanent demonstration and guaranteed. Mail order is our speciality, just quote your credit card or

**SPECIAL OFFER
1 MONTH ONLY**

SHINWA SR001 REMOTE

CONTROL SCANNER

£299

Martin Lynch is a Licenced Credit Broker.
Full written details upon request.
Typical APR 36.8%

PHONE 081-566 1120



For fast mail order Tel: 081-566 1120. Please add
£10.50 for 48 hour delivery.
SHOP OPENING HOURS:
Tuesday - Saturday 10 - 6pm.
24 hour Sales HOT LINE 0860 339 339 (after hours
only). FAX order line open 24 hours

BUYING OR SELLING... DIAL 081-566 1120 NOW!