

# Electronic Engineering

INCORPORATING ELECTRONICS, TELEVISION AND SHORT WAVE WORLD

**PRINCIPAL  
CONTENTS**



Picture Storage in Television  
Secondary Emission Problems in Tetrodes  
Plastics in the Radio Industry, Part III  
Frequency Modulation, Part III  
Data Sheets, Nos. 18 and 19  
An Improved Time Base Circuit

**2/- JAN., 1942**

## Check location on this Radio Globe


Webb's Radio Globe should find a place in every radio "shack." On calculations of direction and distance it provides a real check that cannot be obtained when using ordinary maps. Produced in conjunction with Messrs. George Phillips & Son every precaution has been taken to ensure accuracy. International prefixes and I.A.R.U. continental zone boundaries are clearly marked. Time disc incorporated. The globe is fully coloured, 12" diameter, and mounted on oxydised copper base, with engraved meridian. Overall height approximately 14". Price 27/6, post free.

WEBB'S RADIO MAP OF THE WORLD. Invaluable for locating stations and checking distances from London. International prefixes and standard time zones clearly indicated. In two colours size 40" x 30". On heavy art paper, price 4/6, postage 6d. On Linen, price 10/6, postage 6d.



# WEBB'S RADIO

Morse Key. (Special Model)

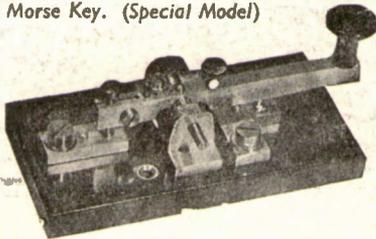

## Morse Training Equipment in stock

Wireless Telegraphy schools, instructors and all who are training as operators will find a comprehensive range of equipment in stock at Webb's.

**MORSE KEYS.** As an indication of our range which includes British-made Bar-type Keys of standard "Post Office" pattern, we list three types which are available in quantities from stock.

SCHOOL pattern in chromium-plated brass on polished wood base, at 8/6.

HEAVY DUTY model in solid lacquered brass on wood base, 15/-.

SPECIAL model with heavy contacts back and front, lacquered brass, wood base, 28/- (As illustrated.)

**AUDIO OSCILLATORS.** Model O.A.1. For private use. This drives one or two pairs of phones—gives 1,000 cycle note and is operated entirely from A.C. Mains. The cost including two valves is £2 5s. 0d

Model O.A.2. Produced for class training it has alternative outputs for 20 or 50 pairs of High Resistance Headphones, or for two loudspeakers. The NOTE is variable in pitch and volume. Entirely A.C. mains operated. Supplied complete for £7 10s. 0d.

**HEADPHONES.** Webb's have available a special light weight headphone manufactured for training purposes by Messrs. S. G. Brown solely for Webb's at 17/6 a pair. All other popular headphones are available from stock including the famous Brown's "A" adjustable Reed at 57/6.



Audio Oscillator

14 SOHO ST. LONDON, W.1. Tel: Gerrard 2089

HOURS OF BUSINESS 9 a.m. to 4 p.m. Saturdays 9 a.m. to 12 noon.



## Mañana

**M**ANUFACTURING methods which are "good enough" to-day will not get by to-morrow. The tempo of industry is accelerating. In this change of outlook and method the Simmonds Organization is playing a vital part. In the aeronautical world, in the motor industry, throughout engineering and in numberless other fields of industrial activity, Simmonds products have wrought revolutionary economies. Each represents the biggest advance to date in its particular field. Collectively they impinge upon the activities of practically every industrial undertaking in the country. The Simmonds Information Centre, established with the express purpose of assisting in the solution of all manner of problems involving the speeding-up of output and the reduction of costs, is constantly being consulted by the managements of concerns alive to the increasing demands upon production. The Simmonds Information Centre is at your service now.

# S I M M O N D S

THE SIMMONDS "WAZ" NUT  
 SIMMONDS-CORSEY CONTROLS  
 SIMMONDS CONTENTS GAUGES  
 FOR AIRCRAFT.  
 SIMMONDS POSITION INDICATORS  
 SIMMONDS ELECTRIC TEMPERATURE  
 AND PRESSURE GAUGES  
 SIMMONDS AIRCRAFT FLOORING



SPEAR "WAZ" NUTS  
 FRAM OIL & ENGINE CLEANER  
 SIMMONDS INDUSTRIAL AND  
 MARINE CONTENTS GAUGES  
 SIMMONDS JOINTING COMPOUND  
 SIMMONDS CRYSTAL UNITS  
 SIMMONDS-GOUDIME  
 NAVIGATIONAL INSTRUMENTS



**SIMMONDS AEROCESSORIES LTD**  
 A COMPANY OF THE SIMMONDS GROUP  
 LONDON · MELBOURNE · PARIS · NEW YORK.



ALL ENQUIRIES TO GREAT WEST ROAD, LONDON.

*Value proven  
by long service*

**Osram  
Valves**

MADE IN  
ENGLAND

*for*

INDUSTRIAL APPLICATIONS

•

ELECTRO MEDICAL  
EQUIPMENT

•

THERMIONIC INSTRUMENTS  
and TEST GEAR

•

VITAL COMMUNICATIONS  
and WARNING SYSTEMS  
ETC.

THE GENERAL ELECTRIC CO. LTD.  
Magnet House, Kingsway, London, W.C.2




## *In Town to-night*

... a million people listen in, to Symphony Concert and Music Hall, to the Epilogue and the Children's Hour, to "some of the interesting personalities who are in town to-night". Delicate instruments, fine components make all that possible; make possible Radio itself, that has brought so much happiness to so many and yet remains something of a mystery. To those concerned, Dubilier is a name in which they place the fullest confidence.

**DUBILIER**  
CONDENSER CO. (1925) LTD.

# F R E Q U E N T I T E

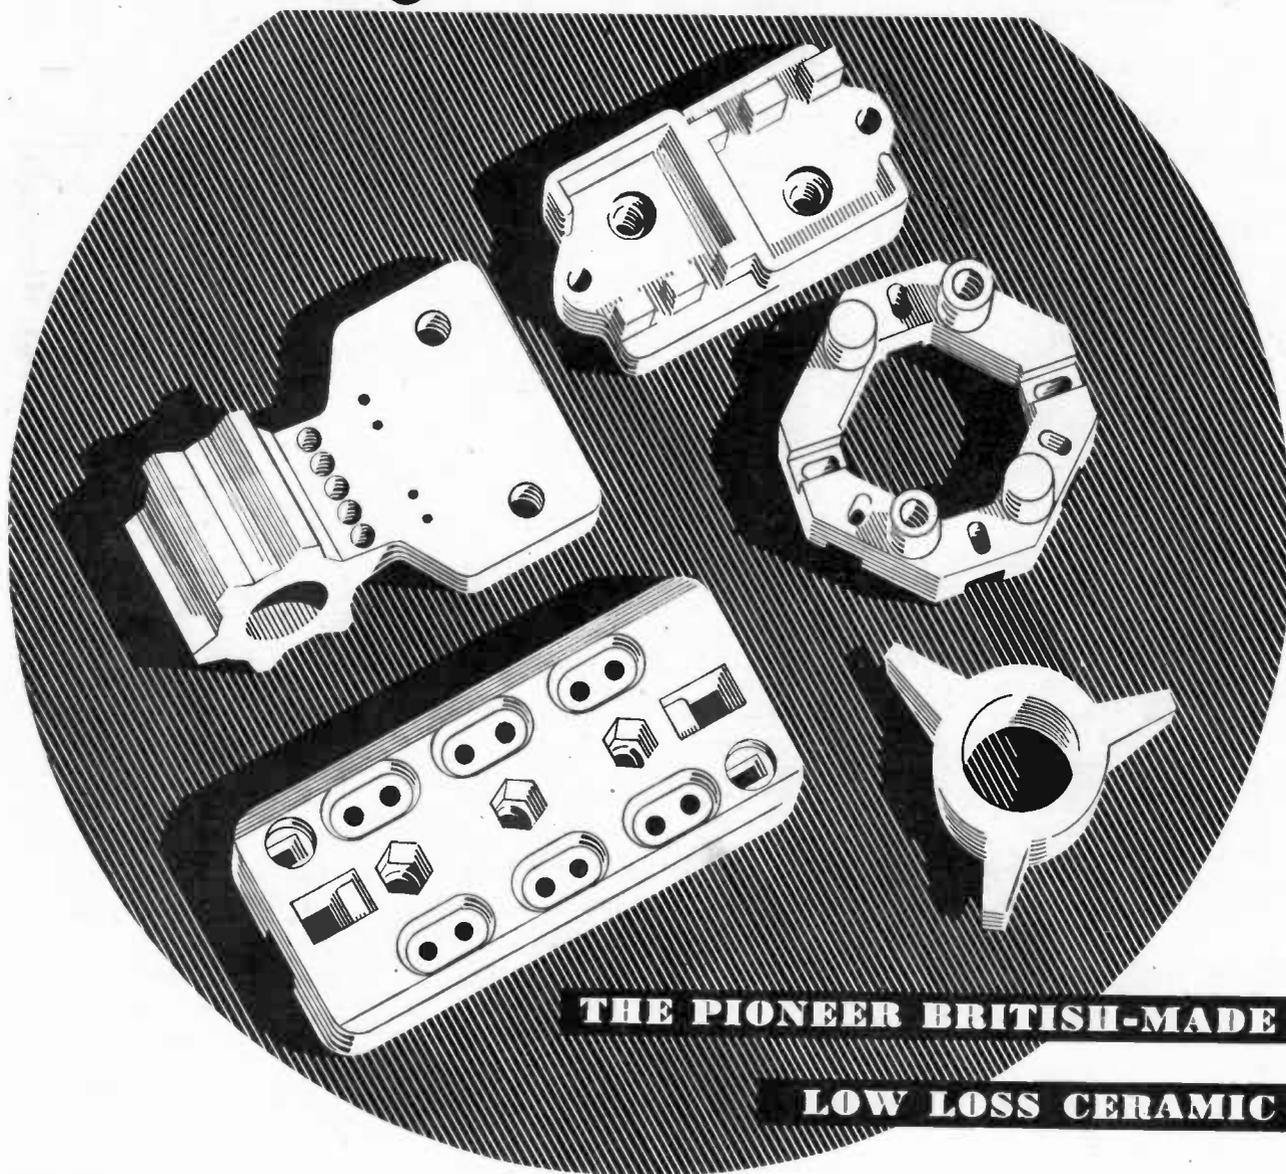

**THE PIONEER BRITISH-MADE**

**LOW LOSS CERAMIC**

**T**HE demand for Frequentite, which possesses outstanding properties of Low Loss and High Mechanical Strength, continues to increase rapidly—*and to be met*. Production capacity has been stepped up over a period of years by extensions to plant, the


employment of specialised new equipment, and progressive improvements in manufacturing technique. Bulk supplies of the most intricate designs can be delivered promptly, and all manufacturers are invited to write for Catalogue No. S.P.10.

## **STEATITE & PORCELAIN PRODUCTS LTD.**

Head Office : STOURPORT-ON-SEVERN, WORCS.

Telephone : Stourport 111.

Telegrams : Steatint, Stourport.

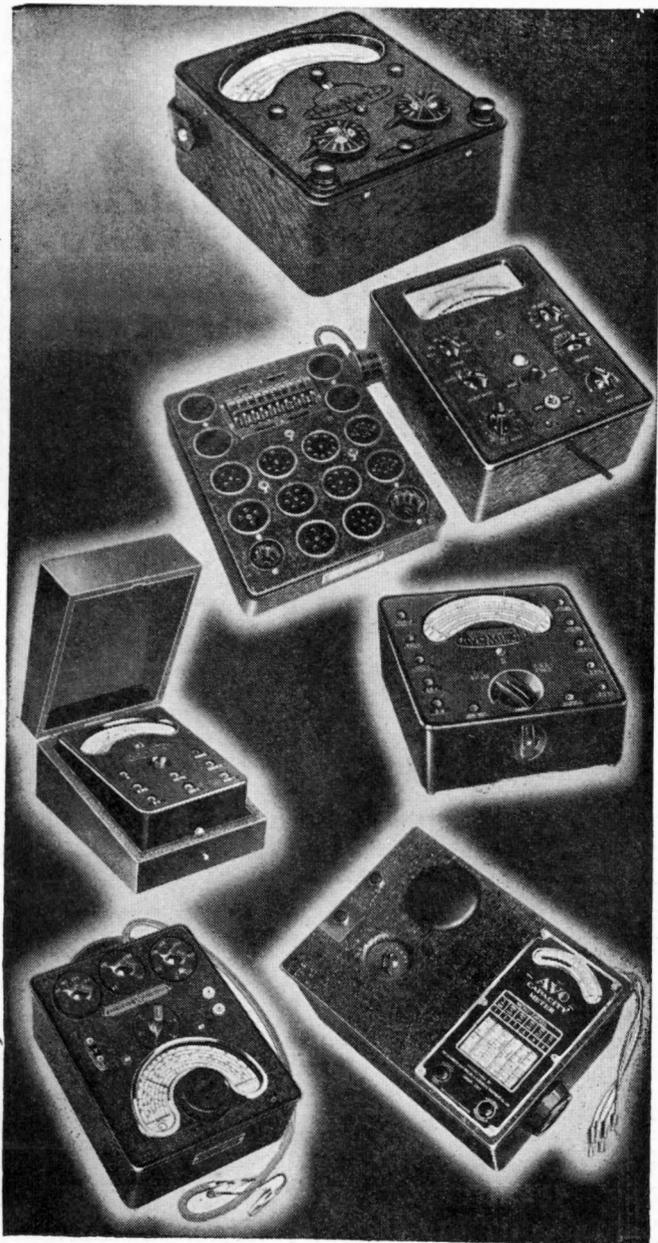

**'AVO'**

**ACCURATE TESTING INSTRUMENTS**


HIGH accuracy, simplicity, exceptional versatility and proven reliability have won for "AVO" Instruments a world-wide reputation for supremacy wherever rapid precision test work is demanded. There is an "AVO" instrument for every essential electrical test.

Some delay in delivery of Trade orders is inevitable, but we shall continue to do our best to fulfil your requirements as promptly as possible.

*The word "AVO" is our registered Trade Mark*

● Send for descriptive literature and current prices.

THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT Co., Ltd.  
Winder House, Douglas Street, London, S.W.1. Phone: VICTORIA 3404-7

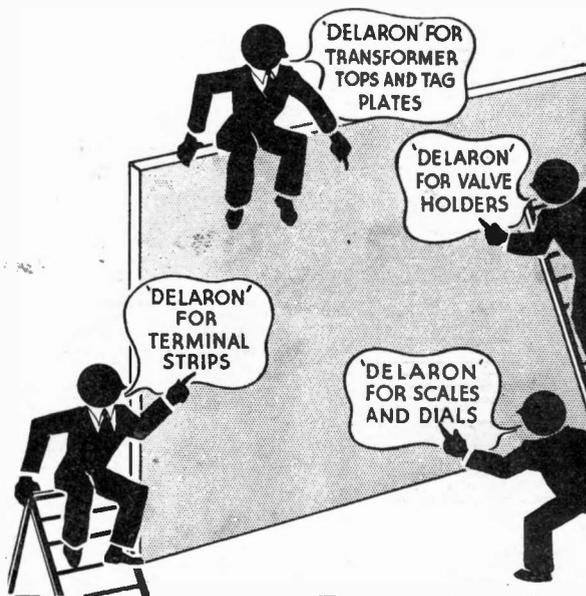


**It's worth while looking well into DELARON**

LAMINATED MATERIAL

And these are just a few of the multitudinous uses to which can be put the many grades of 'DELARON'—a high quality Laminated Material in Fabric and Hard Paper Sheets which can also be made available in panels and strips cut to your special needs. If you now use, or are contemplating using, this type of material, then examine the qualities and possibilities of 'DELARON'—we believe it will pay you in the long run. Supplied in Air Ministry and Ministry of Supply approved grades, 'DELARON' is proving its worth daily in the field of Radio Engineering. Fullest details, samples and the services of our sales engineers are freely at your disposal.



5, REGENT PARADE, BRIGHTON ROAD,  
SUTTON, SURREY  
Tel.: Vigilant 4472

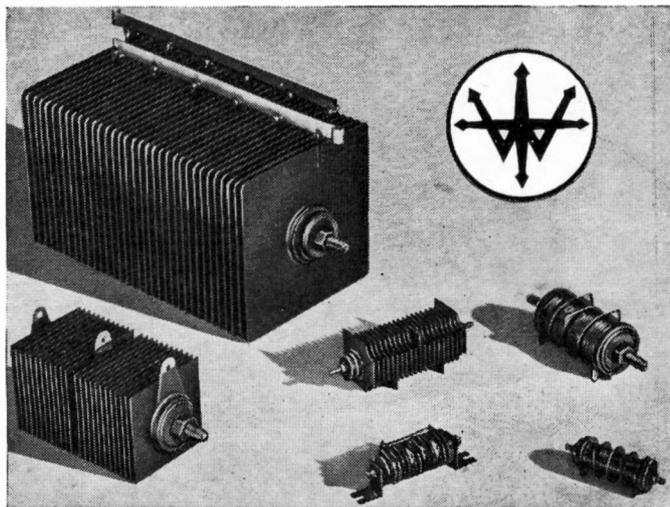


*Where strength  
and reliability  
COUNT*

Developed by engineers having over 15 years' experience in rectifier technique and production, Westinghouse Metal Rectifiers combine strength with reliability. They have a variety of uses in electronic engineering, where their outstanding qualities are proving of great benefit.

## WESTINGHOUSE METAL RECTIFIERS

WESTINGHOUSE BRAKE & SIGNAL CO. LTD., PEW HILL HOUSE, CHIPPENHAM, WILTS.

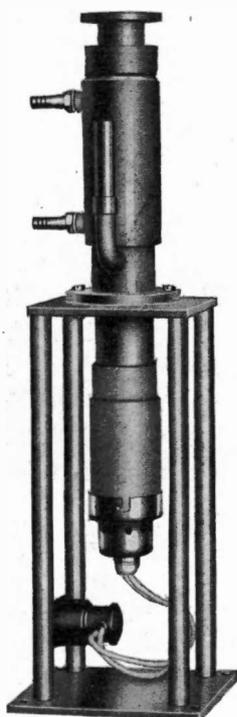

Type O2 Diffusion  
Pump on stand with  
heater.

New List DIF. 2 describes

### OIL DIFFUSION PUMPS

The diffusion Pumps (Metrovac) described in this list operate with Apiezon Oils. A copy of the catalogue, which gives the technical characteristics of each pump, is invaluable to anyone interested in high vacuum technique.

Characteristics	Type O2	Type O3
Vacuum, mm. Hg. with "A" Oil	$10^{-5}$	$5 \times 10^{-6}$
Speed, litres per second	Below $10^{-2}$ mm. Hg. 7	Below $10^{-3}$ mm. Hg. 20
Backing Pressure, highest permissible mm. Hg.	0.3	0.05
Heater input, watts	450	275
Type of Apiezon Oil	"A"	"B"
Charge of Oil—c.c.s.	50	75

Delivery at present from stock

**W. EDWARDS & CO. (London), LTD.**  
Southwell Road, London, S.E.5.

Telephone :  
BRixton 1195

Telegrams :  
Edcohvac, Phone, London.



With almost machine gun rapidity Eimac tubes have been adopted by one after another of the leading radio communication fields. The radio amateur, commercial airlines, frequency modulation, blind landing equipment, police radios, television, diathermy, general industrial applications . . . and now Uncle Sam.

It is fitting that defense equipment be of the finest obtainable and of proven merit. Eimac tubes fit that description and more too. Their service in the ground stations of practically every major airline . . . their pioneering in frequency modulation . . . in hundreds of equally important commercial transmitters throughout the world . . . and many other shining examples make them important to the national cause.

Eimac is continuing to produce more and ever more of the tubes which are unconditionally guaranteed against premature failures caused by gas released internally and Eimac is continuing to improve performance capabilities . . . set higher and higher standards of quality . . . develop new tube types as the industry needs them. But Uncle Sam comes first—you may experience short delays in delivery, but expanded facilities will bring them as fast as possible

**EITEL-McCULLOUGH, INC.**

San Bruno, California

Export Agent


**FRAZAR & CO. LTD.**

301 CLAY STREET

SAN FRANCISCO, CALIFORNIA, U.S.A.

**Eimac**  
**TUBES**

# SYMBOLS OF PRECISION

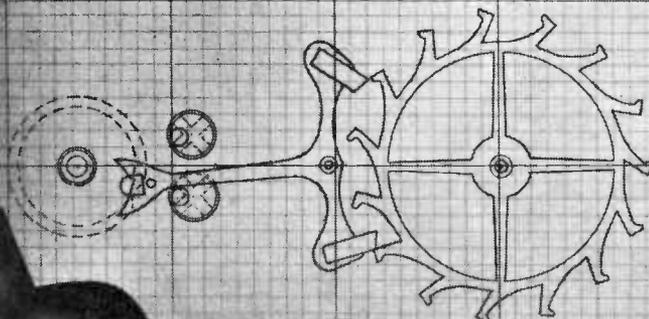

WATCH ESCAPEMENT



# MAZDA

RADIO  
VALVES

Mazda Radio Valves are manufactured in Gt. Britain for the British Thomson-Houston Co. Ltd., London & Rugby and distributed by

THE EDISON SWAN ELECTRIC CO. LTD.  155 CHARING CROSS RD., LONDON, W.C.2

For full particulars write to Technical Service Department

Monthly (published last day of preceding month) 2/- net. Subscription Rates: Post Paid to any part of the World—3 months, 6/6; 6 months, 13/-; 12 months, 26/-. Registered for Transmission by Canadian Magazine Post.

# Electronic Engineering

PROPRIETORS :  
**HULTON PRESS LTD.,**  
Editor : **G. PARR.**

TELEPHONE :  
CENTRAL 7400

TELEGRAMS :  
HULTONPRES LU D  
LONDON.

No. 167 Vol. XIV

JANUARY . . . 1942

EDITORIAL, ADVERTISING AND PUBLISHING OFFICES, 43-44, SHOE LANE, LONDON, E.C.4

## CONTENTS

	PAGE		PAGE
Picture Storage in Television... ..	578	German Portable Transmitter (Photographs) ...	596
Plastics in the Radio Industry, Part III ... ..	581	Book Reviews ... ..	596
Frequency Modulation, Part III ... ..	584	An Improved Hard Valve Time Base ... ..	598
Secondary Emission Problems in Tetrodes ... ..	586	Abstracts of Electronic Literature ... ..	602
Data Sheets 18 and 19... ..	589	Temperature Controlled Cutting Head ... ..	605
Stable Admittance Neutralisation ... ..	594		

## Announcements

### Price

It is with great regret that the publishers of this Journal have been compelled to increase its price from 1s. 6d. to 2s. in order to meet the rising costs of printing and production.

Naturally, we do not dwell on the difficulties under which we are working at the present time, but we would remind readers that the printing and allied trades have lost a large number of skilled operators and this combined with the difficulties of supply and distribution adds considerably to the troubles of producing a technical journal in war-time.

Commencing with the February issue, the number of pages allocated to editorial matter will be increased, which will, we think, more than compensate our readers for the slight additional cost of the journal.

### Binding

Again, the supply of binding material and the shortage of labour present problems in the binding of the 1941 issues. It is possible that some readers would prefer to bind the journal under its new title in a separate volume from *Electronics and Television*, but the number of parts issued makes this an uneconomical proposition if the volume is terminated at December, 1941.

Accordingly, it has been decided to continue the run of the present volume into 1942 to enable a uniform size cover to be used. For those who wish to bind the whole of the 1941 issues in one volume, irrespective of the change in make-up, a limited number of brown



[Reproduced by permission of the Proprietors of "Punch"] ACANTHUS

"I've given all my books and papers to Lord Beaverbrook."

### HAVE YOU ?

There is no need to be so drastic in clearing out books and papers, but the fact remains that there are literally tons of waste paper in old books and catalogues which could be used as a direct contribution to the war effort.

Please have a clear-out before the end of the year and ask your local council to collect the paper salvage—they will be quite willing to do so.

binding cases, uniform with those of previous years, are available at a cost of 2s. post free.

Readers are asked to make their own arrangements for the actual binding of the volumes, as the publishers regret that they are unable to undertake the binding at the present time. Inquiries for binding cases should be addressed to the Circulation Dept.

### Data Sheets

As mentioned in an earlier issue, binding covers for Data Sheets are being prepared and will be ready shortly.

The cover is in stiff blue paper with a back carrying a number of strings through which the individual sheets can be slipped. The case opens flat and allows the data sheet to be easily read. The capacity is 24 sheets, and the cost is 2s. 6d. post free from this office.

For those readers who have not been able to obtain a complete set of the issues containing the Data Sheets a small number of binders can be supplied complete with sheets for 4s. 6d. post free.

Owing to the paper shortage and the impossibility of reprinting sheets at the present time, back copies of the Data Sheets can only be supplied to readers taking out a regular subscription to the Journal.

### New Year Greetings

The Editor takes this opportunity of wishing all his readers a better New Year with the prospect of even brighter ones to come.

# Television Picture Storage

## A New Method of Electronic Storage Excitation of Television Receiving Screens

by A. H. ROSENTHAL, Ph.D., F.R.A.S.

At the beginning of 1940 a description of the Skiatron—a new development in television picture projection—was given in "Electronics and Television." Dr. Rosenthal, the inventor of the method, who was formerly associated with the Scophony Laboratories in this country, is now a consulting physicist in New York.

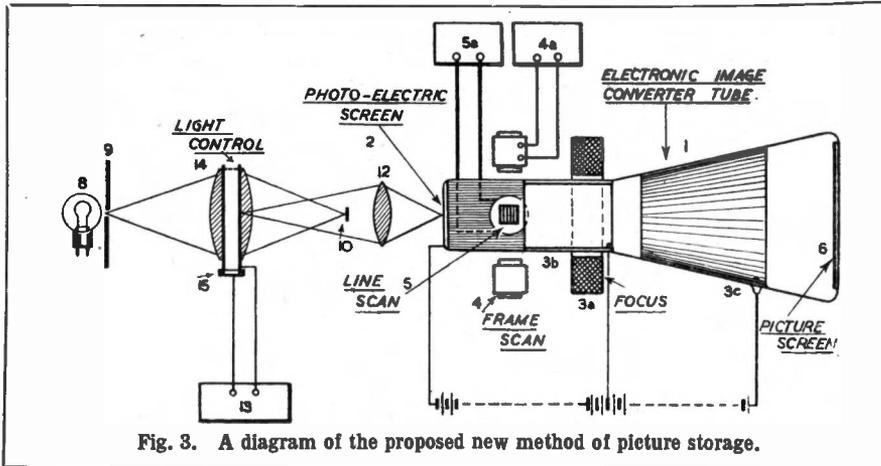


Fig. 3. A diagram of the proposed new method of picture storage.

IN conventional cathode-ray tubes for television reception the picture screen\* is scanned by a cathode-ray spot of an area equal to the approximate size of a picture element.

Each elemental picture area of the screen is excited for only the duration of the elemental scan, or, in other words, at any moment, only one elemental area is excited.

In optical-mechanical television systems the corresponding fact of only one elemental area being illuminated at any moment, combined with the optical law that any such illuminated area cannot have a brilliancy higher than that of the light source, actually limited these systems to low definitions. Only through the use of the supersonic light modulator which permitted a simultaneous illumination of several hundred picture elements, *i.e.*, by applying the principal of *optical storage* could optical-mechanical television overcome this serious limitation, and, as developed in the Scophony system<sup>2</sup>, achieve surprising successes for brighter and larger pictures than had been possible before with any other system.

The general importance of optical storage for television reception, in analogy to electrical storage for television transmission has been universally recognised, and its application in electronic reception system described.<sup>1, 2</sup>

In systems of this kind the information is carried to a storage screen by

\* "Picture Screen" in the following denotes various kinds of screens used in cathode-ray tubes, especially fluorescent screens, but also screens the transparency of which can be varied in accordance with the intensity of the electron beam, as for instance used in the Skiatron.<sup>1</sup>

scanning this screen by a single modulated cathode-ray beam, and by some time-lag properties of this screen the elemental light values are retained there for a certain time, or a certain number of picture elements are simultaneously optically active.

Fluorescent screens show a certain amount of storage caused by phosphorescent afterglow and by using screens with a suitable afterglow characteristic improved television standards have been aimed at.<sup>3</sup>

The object of this paper is to investigate whether electronic picture screens (and particularly fluorescent screens) if excited as usual by a single cathode-ray beam of elemental spot size show limitations similar to those found in older optical mechanical systems, and to discuss ways to overcome these limitations by the use of *electronic storage excitation*.

In such single beam cathode-ray receiving tubes the area of the scanning spot will determine the definition of the picture. If this definition is to remain unaltered the only way to increase the intensity of the picture, for a given accelerating voltage, is to increase the current density of the beam. There exist, however, severe limits to the possible amount of this increase. At high beam densities the active centres of a fluorescent screen are rapidly destroyed and thus the life of the screen is seriously shortened.

But also with undamaged screens the fluorescent efficiency is lowered with higher current densities as a consequence of the saturation of the phosphorescent materials at high current densities so that no increase of the

screen brightness can be obtained except by increasing the spot size, *i.e.*, allowing a certain amount of overlapping of adjacent picture elements, and thus impairing the definition. These difficulties become most acute in the case of cathode-ray tubes for optical projection. Owing to the relatively small size of the very bright fluorescent picture the current density of the cathode-ray spot must be very great, and usually a certain overlap, *i.e.*, a compromise with definition, must be tolerated in order not to impair too seriously the optical efficiency by surpassing the saturation limits of the screen.

These considerations have been illustrated by experiments in which a screen is scanned by an unmodulated cathode-ray beam. The spot size is varied by defocusing, keeping the total beam current constant, and thus varying the current density; the light output and thus the efficiency fall considerably when the spot is sharply focused, *i.e.*, when the current density is high (2 mA per square millimetre) and the screen material is saturated.<sup>4</sup>

Reducing the current density by distributing the total beam current over a larger area by defocusing the spot, and thus reducing the definition is a most unsatisfactory compromise. The only reasonable way to effect such a distribution of the beam current over a larger screen area without impairing definition would be the use of many sharply focused and independently modulated cathode-ray beams, following each other in the scanning direction, their modulations having the proper phase differences.

Such a multiple cathode-ray beam comprising  $n$  elemental beams might for instance simultaneously scan many  $n$  elements of a picture line, and would effect for any picture element a "storage excitation" of a duration  $n$  times the elemental scanning period.

Before discussing a simple promising way how to realise this object a simplified calculation may show what can be expected.

If excited by a cathode-ray beam of constant intensity the luminosity  $L$  of a phosphorescent material increases close to an exponential function and approaches with increasing time of irradiation a saturation value  $L_0$ . When the excitation ceases, the luminosity decreases, also in many cases approximately in an exponential function. Experience shows that materials with a

short afterglow also show a fast increase of their luminosity towards saturation whereas materials with a long afterglow show a slow increase of their luminosity during the excitation. For a simple calculation we may consider an exponential increase and decrease of luminosity and equal time constants for the increase and the decrease. The luminosity increases then according to  $L = L_0 (1 - e^{-\alpha t})$ , and decreases according to  $L = L_m e^{-\alpha t}$ , where  $L_0$  is the saturation luminosity and  $L_m$  the luminosity when the excitation ceases.

(a) An elemental scanning cathode-ray beam may excite a small screen area during the elemental period  $t_e$  up to a luminosity  $L_m$  equal to a certain fraction  $r$  of its saturation luminosity  $L_0$  (Fig. 1):

$$r = L_m / L_0 = 1 - e^{-\alpha t_e}$$

After the time  $t_e$  the luminosity  $L_m$  decreases. The total effective light output of this area is determined by the integral over the luminosity curves from the time zero to infinite:

$$I_a = \int_0^{t_e} L_0 \cdot (1 - e^{-\alpha t}) \cdot dt + \int_{t_e}^{\infty} L_m \cdot e^{-\alpha t} \cdot dt$$

the calculation results in:

$$I_a = L_0 \cdot t_e \left( 1 - \frac{r^2}{\log e \frac{1}{1-r}} \right)$$

(b) Now we regard the storage excitation of a screen area by a multiple cathode-ray beam comprising  $n$  elements and thus lasting for a time  $n \cdot t_e$  (Fig. 2). Here the effective light output is:

$$I_b = \int_0^{n \cdot t_e} L_0 (1 - e^{-\alpha t}) dt + \int_{n \cdot t_e}^{\infty} L_n \cdot e^{-\alpha t} dt$$

where  $L_n$  is the luminosity reached after excitation time  $n \cdot t_e$  the calculation resulting in:

$$I_b = L_0 \cdot n \cdot t_e \left( 1 - \frac{[(1-r)^n - 1]^2}{n \cdot \log e \frac{1}{1-r}} \right);$$

Of particular interest is the gain in light output obtained by this storage excitation as compared to elemental excitation:

$$g = \frac{I_b}{I_a} = n \cdot \frac{\log e \frac{1}{1-r} - \frac{1}{n} [(1-r)^n - 1]^2}{\log e \frac{1}{1-r} - r^2}$$

Since  $r < 1$  a sufficient approximation is:

$$g = n \cdot \frac{\log e \frac{1}{1-r} - \frac{1}{n}}{\log e \frac{1}{1-r} - r^2}$$

An evaluation of these equations shows that for excitations leading after the elemental period  $t_e$  either to very low or to very high fractions  $r$  of the saturation  $g$  approaches  $n$ , or the light output is multiplied with the same factor as the excitation time of the screen area. For all intermediate values of  $r$ , the gain factor  $g$  is larger than  $n$  and a maximum of  $g = 1.55 \cdot n$  exists for an  $r$  of approximately 70 per cent., i.e., for such screen material and current density that a small screen area has after the element period  $t_e$  reached about 70 per cent. of its saturation luminosity.

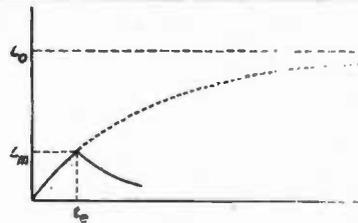


Fig. 1.

The following table shows some values of  $r$  and  $g$ :

$r$	0	1	10	50	90	99	99.9	100%
$g$	1	1.01	1.1	1.55	1.54	1.27	1.17	1

These considerations may be interpreted in two ways:

(1) If the excitation time of a screen area and the total beam current is increased by a factor  $n$  (over the element period  $t_e$ ) the light output of that area is increased by a factor at least equal, generally larger than  $n$ . But the current density has remained unchanged.

(2) If the excitation time of a screen area is increased by a factor  $n$ , but the total beam current kept unchanged, or, in other words, the elemental cathode-ray beam is replaced by a multiple cathode-ray beam of equal total beam current, the light output remains at least the same, and is generally even increased. But in this case the current density has decreased in proportion to  $n$ .

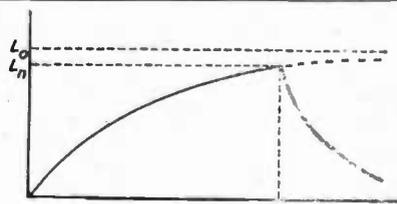


Fig. 2.

Generally speaking, such a multiple beam method permits an increase of the beam current by a very high factor without an increase in the current density beyond the saturation limit, and leads to an increase in light output by an even higher factor without the compromise of overlap impairing definition.

The advantages of such a multibeam cathode-ray system appear obvious

after this discussion, but the realisation of a cathode-ray tube with a great many scanning cathode-ray beams modulated independently in proper phase relations to each other seems hopeless with conventional design. However, available electronic technique provides means with which to obtain automatically such a multi-beam device.<sup>5</sup>

Use is made of the multi-beam imaging properties of an electronic image converter tube 1 (Fig. 3) containing a photo-electrically active screen 2 and a fluorescent—or other image screen 6 and in which the electron beams liberated by an optical image projected on to the photo-electric screen can be imaged point by point on to the fluorescent screen by electron-optical focusing devices of an electrostatic and/or electromagnetic type, 3a, 3b, 3c.

This device is associated with a supersonic light modulator 14, as used in the Scophony optical-mechanical television system (2). This light modulator, which has been described in detail previously, contains a piezo-electric crystal 15 which is energised by high frequency voltages modulated in amplitude in accordance with the received picture signals from the oscillator-modulator 13.

The oscillating crystal sets up in the liquid 11 with which the cell is filled a travelling train of supersonic waves carrying these modulations.

A lens 12 collects the light from a light source 8 and diaphragm 9 which is diffracted by the waves and thus passes the stop 10, and forms an image of the moving train of waves on the photo-electric surface 2. This image will be that of a portion of a picture line, representing several hundred picture elements, their number depending upon the length of the wave train in the liquid. But the picture points reproduced on the photo-electric screen 2 and their electron-optical image on the fluorescent screen 6 are moving at speeds depending upon the velocity of propagation of the waves in the liquid.

Deflecting coils 5 (or electrostatic deflection means) move this picture of part of a line over screen 6 in the line scanning direction in such a sense and at such speed that the moving wave images represented in this line picture are immobilised with respect to the screen 6. Deflecting coils 4 move these line images over the screen in the frame-scanning direction so that a complete picture is reconstructed on the picture screen 6. The deflecting means are energised by time bases 4a and 5a synchronised by the television synchronising signals.

Thus the total number of elemental areas of the picture screen which are simultaneously excited by the electron beams is equal to the number of picture points represented in the wave train of the supersonic light modulator, and the optical storage inherent in this light modulator effects a "storage excitation" of each screen area for a time in

excess of the usual elemental scanning period by a factor equal to the number of elements optically active in the supersonic cell which is usually several hundred.

The supersonic light modulator may be imaged on to the photo-electric screen by a cylindrical lens system in such a way that the magnification perpendicular to the line scanning direction is larger than in this direction, so that the line width on the screen 2 is considerable. The photo-electric screen is then imaged on to the picture screen 6 by an electron-optical imaging system, which in the line direction has a higher magnification than perpendicular to it (an anamorphic\* system 6) producing on the picture screen a line image of the proper ratio of length to width. This procedure makes it possible to distribute the total light flux from the light modulator over a larger area of the photo-electric surface, thus reducing the light flux per surface unit, and permitting a higher total beam current.

In the arrangement as shown in Fig. 3 both the photo-electric screen 2 and the fluorescent screen 6 have to be semi-transparent. An arrangement illustrated in Fig. 4 in which the electron beams are bent about 90° by suitable magnetic or electric deflection fields 21, permits the use of opaque (metal) screens which may be cooled, and which can be of considerably higher photo-electric efficiencies than semi-transparent screens.

In a normal image converter arrangement where the image on the photo-electric screen is stationary this screen must have a very uniform sensitivity over its surface, a property which is difficult to combine with highest photo-electric efficiency. In the present arrangement, however, where the picture points of the optical wave image, are in motion with respect to the photo-electric surface, any non-uniformity in the sensitivity of this surface will equally affect all picture points and will therefore not appear in the final picture.

The picture produced on the picture screen 6 may be utilised for direct viewing, or it may be projected optically on an enlarged scale on to a viewing screen.

The electron image converter effecting an electronic immobilisation of the moving wave images offers further the possibility of an image amplification, *i.e.*, the brilliancy of the fluorescent image produced on the picture screen may be many times greater than that of the image of the wave trains projected on to the photo-electric screen 2. This increase of brilliancy, or in the light flux depends upon the efficiencies of the photo-electric screen  $\phi$  and of the fluorescent screen  $f$ , and upon the accelerating voltage  $V$  applied in the tube.

\* Anamorphosis: Distorted drawing appearing regular from one point.—O.E.D. (Ed).

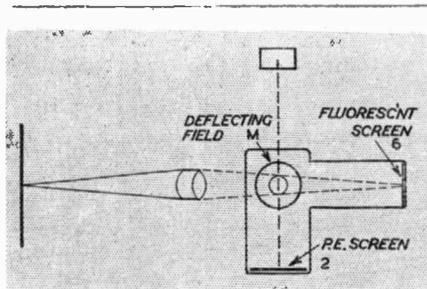


Fig. 4. Modification to the system permitting the use of opaque screens

The total light flux radiated by the fluorescent screen is:

$$L' = 4\pi \cdot \phi \cdot f \cdot V \cdot L,$$

where  $L$  is the light flux falling on to the photo-electric screen.

Thus the gain factor for the light flux is  $4\pi \cdot \phi \cdot f \cdot V$  with a  $\phi$  of 30 microamperes per lumen and an  $f$  of 4 candles per watt, and an accelerating voltage  $V$  of say 30,000 volts the gain factor would be approximately 45. However, since the light flux from the fluorescent screen is radiated in all directions, only a fraction of it is utilised. For instance, when projecting the fluorescent image on to a viewing screen by an optical system of an aperture  $f:1$ , about 5 per cent. of the light is collected by the optical system.

In comparing the system with a conventional cathode-ray tube for projection we can obtain an estimate of the advantages resulting from the above considerations relating to the screen saturation.

Suppose a cathode-ray tube with a 3 in. by 4 in. fluorescent picture obtained with a beam of 3 milliamperes. With a 525 line-standard, in order to avoid overlapping, the spot area has to be of the order of  $1/50$ th square millimetre, thus resulting in a current density of 150 mA per square millimetre, far exceeding the saturation limit of average fluorescent screens (about 2 mA/sq. mm). A considerable overlap with loss of definition will be required in order to prevent serious damage to and quick destruction of the screen. (See also Reference 4).

In the present quasi-multi-beam system the same current will scan with full definition simultaneously, say 250 picture-elements—depending upon the length of the supersonic cell utilised—and thus be distributed over an oblong line area of  $0.14 \times 36$  mm., or more than 5 square millimetres, resulting in a current density of only 0.6 mA per square millimetre which is far below the saturation limit.

By using a larger fluorescent screen, even with a single-beam tube the current density could be considerably reduced, however, the cost of the optical projection equipment rises with a high power of the screen size, and screen pictures much larger than 3 in. by 4 in. would lead to prohibitive optical costs.

With the above-mentioned photo-

electric efficiency a beam current of 3 mA will require on the photo-electric screen a light flux of 100 lumens.

Using as mentioned above, optical and electron-optical imaging systems of different magnifications in and perpendicular to the line direction, in such a way that the image of the aperture of the supersonic light control is spread over a considerable area of the photo-electric screen 2, of say 4 in. by 4 in., the illumination on this screen is approximately 1,000 foot-candles or of the same order of magnitude as the illumination caused on an outdoor object by diffuse daylight. A highly sensitive photo-electric layer, even if of the semi-transparent type on a glass carrier, can stand considerably higher illuminations without harmful effects.

It remains to estimate the light flux which will pass through, and is controlled by a supersonic cell light modulator of convenient design.

In the plane of propagation of the supersonic waves the linear aperture,  $a$  of the cell is determined by the number  $n$  of elements optically stored by the cell, and the velocity of the supersonic waves  $v$ . If  $n = 250$  and  $v = 10^5$ ,  $a$  is 7.5 cm. The angular aperture  $\alpha$  in this plane is determined by twice the ratio of the wavelengths of the light to supersonic waves. With an average light of 5,000 ÅU and a carrier frequency of 20 Mc/s, resulting in a supersonic wavelength of  $5 \cdot 10^{-3}$  cm, we obtain  $\alpha = 1/50$ .

In the plane perpendicular to the propagation of the supersonic waves the apertures are only limited by optical considerations. Convenient values are, for the linear aperture,  $b = 1.5$  cm, for the angular aperture  $\beta = \frac{1}{2}$ .

The light flux  $L$  which can be passed through such an oblong aperture by suitable optical imaging processes, and originating from a light source of intrinsic brilliancy  $B$ , is in good approximation.

$$L = a \cdot b \cdot \alpha \cdot \beta \cdot B,$$

with the above values:

$$L = 7.5 \times 10^{-3} \cdot B$$

Using as light source an incandescent projection lamp of a usual brilliancy of 1,600 stilb (cd/s per sq. cm.) we obtain a maximum light flux passing through the supersonic cell of  $L = 120$  lumens.

These rough calculations show that with available means, using a projection incandescent lamp, one can easily obtain sufficient light, and a suitable illumination on the photo-electric surface of an ordinary image converter tube, to result on the fluorescent screen of this tube in a small picture of high intensity and full definition, and remain safely below the saturation limit of the fluorescent screen.

The conditions underlying these estimates can be considerably improved by using in the image tube intermediate secondary-electron emissive screens, on to which the moving, or the im-

(Continued on p. 600)

# Plastics

## in the Radio Industry

### III.—Manufacture

E. G. COUZENS, A.R.C.S., B.Sc., and W. G. WEARMOUTH, Ph.D.  
(Messrs. B. X. Plastics Ltd.) (Messrs. Halex Ltd.)

**T**HE manufacture of a plastic can be divided into three phases, the preparation of the basic plastic substances, its manipulation into forms suitable for the manufacture of articles and thirdly, the actual manufacture of the article itself.

The first phase consists of chemical reactions which fall into the following classes: (1) The preparation of the cellulose derivatives, *e.g.*, such compounds as cellulose nitrate, acetate or ether; (2) the formation of "thermo-setting" compounds by the reaction of formaldehyde with phenolic substances or urea; (3) the preparation of thermoplastic synthetic resins by a process of polymerisation of relatively simple substances containing a "double bond" (*see part 1, p. 482*) into "long-chain" substances of great molecular weight. Examples of these are polystyrene and polymethyl methacrylate, or "Perspex."

The second phase corresponds to the differing chemical structures of the three classes of the first phase. The cellulosic derivatives by themselves are only thermoplastic to a limited degree and have to be "plasticised" or softened by the addition of a high boiling solvent. They are then manufactured into sheets, rods and tubes, the raw materials of the final phase of article-manufacture, by a process known

Fig. 2 (right). Removing polished celluloid sheet from polishing "nip."  
Courtesy of BX Plastics, Ltd.



as the "celluloid technique," which involves the use of a low-boiling solvent to assist in mixing.

The second phase of the manufacture of the formaldehyde compounds is entirely different. Here the object is the production of a moulding powder and this is done by processing the raw material with fillers, colours and accelerators on hot rolls, followed by grinding. The casting process is an exception.

The thermoplastic synthetic resins are manipulated by processes derived in part from the celluloid technique or by casting or by the moulding or extrusion of powders to form sheets, rods and

tubes, the process depending upon the nature of the resin, but unlike the cellulose thermoplastics, low-boiling solvent is not used.


The third phase, the manufacture of articles, is less diverse, the thermoplastic materials whether cellulosic or synthetic resinoid, being shaped by heat or machined from some stock form or moulded from powder, while the thermo-setting materials are used solely in a compression moulding process with the exception of cast resin already mentioned and the special case of the extrusion of tubes.

It is proposed to deal first with two outstanding examples, Xylonite (cellu-



Fig. 1 (left). Slicing celluloid block.  
Courtesy of BX Plastics, Ltd.

Fig. 3 (right). Extruding celluloid tubes.  
Courtesy of BX Plastics, Ltd.

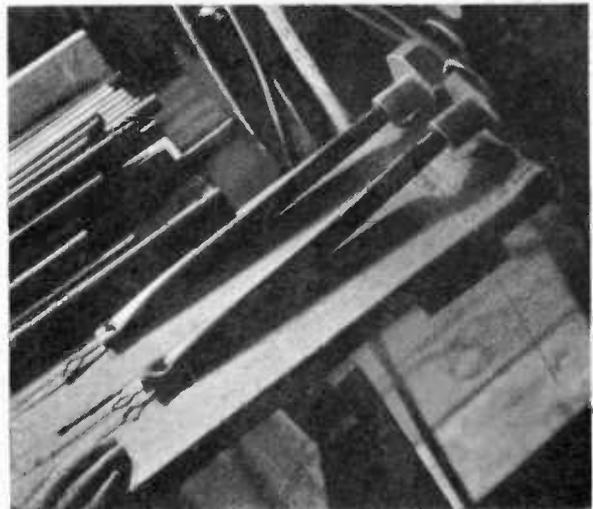

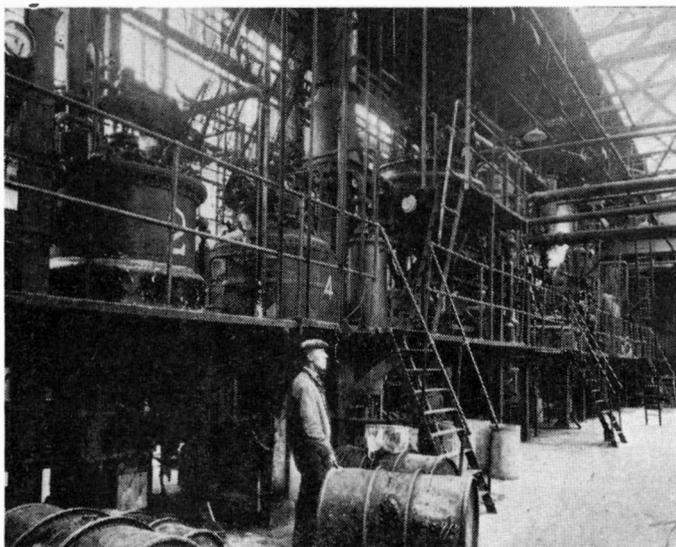


Fig. 4. Battery of resinoid digesters. Courtesy of "Plastics."


loid) and phenol-formaldehyde (Bakelite).

#### Xylonite

The starting material is the short fibre of the cotton-seed, known as "linters." After purification and drying it is treated with a controlled mixture of nitric and sulphuric acids and water in stainless-steel vessels provided with stirrers which are mounted above a stainless-steel centrifuge. During the process of nitration, cellulose nitrate is formed. During the process the cotton appears to be unchanged and after being discharged along with the acid into the centrifuge it is spun off and dropped through an opening in the bottom of the centrifuge into a large quantity of water, forming a slurry which is then pumped into vats, where it is washed until the acid content of the water is very small. It is then boiled with steam to destroy a sulphuric acid compound which renders it unstable, after which it is bleached with hypochlorite and spun off.

The resulting damp cake of white nitrocellulose fibre is now washed with

Fig. 6. Laminated sheet press. Courtesy of Bakelite, Ltd

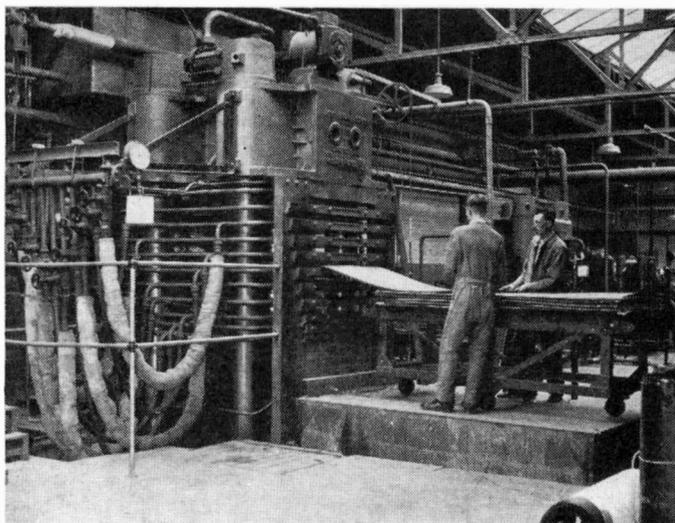

rods which are collected in a stainless steel pot. It is now necessary to reduce the solvent content of the dough to from 10 to 15 per cent. for the subsequent processes and this is done by milling on heated rolls, from which it is eventually transferred to calendering rolls which are slightly warmed and which convert it into firm sheets of plastic which are trimmed to a standard size and assembled in rectangular piles, which are then placed on cast iron bases with a grooved upper surface and pressed into solid blocks in heated hydraulic presses known as "block presses." The block of plastic is then mounted on the reciprocating travelling bed of a slicing machine which, like a plane, slices off sheets of any given thickness (Fig. 1) from 5/1,000 in. upwards, the solvent content of the dough being such that while firm and strong a knife will cut it readily. As the sheets still contain solvent, it is necessary to remove this by stoving for periods which vary from

Fig. 5. Impregnating machine used in the production of Bakelite laminated sheet. Courtesy of Bakelite, Ltd.

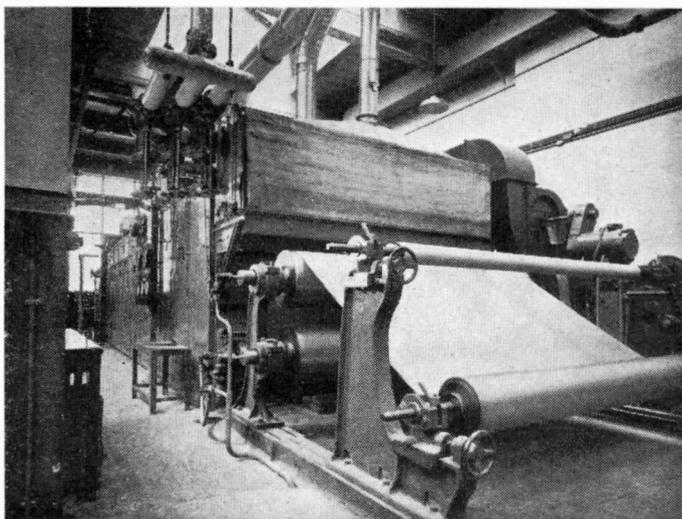




Fig. 7. Moulding of Bakelite (Loading mould).  
Courtesy of Bakelite, Ltd.

a few days for thin sheets to many weeks for thick sheets.

The sheets, which are usually cut from blocks of such a size as to be about 4 ft. 6 in. by 2 ft. after the shrinkage caused by stoving, are now matt in appearance with fine lines, caused by the slicing-knife, running the length of the sheet and to remove these they are placed in contact with highly-polished metal plates in steam-heated hydraulic presses, the plastic being surfaced to a mirror finish by the highly-polished metal plate. A matt surface can be produced in the same way by contact with sand-blasted plates.

This complicated process is now highly standardised and can be very economically operated. One of its outstanding advantages is that not only by working in pieces of harder material of a different colour in the rolls can mottles be produced, but by packing freshly sliced sheets in various ways, repressing into a block and re-slicing, controlled patterns of great variety and beauty can be obtained. Ivory used for knife-handles is made in this way. The sheet from the calenders can also be rolled into a cylindrical block for insertion into a hydraulic extrusion press or cut into cubes for a "screw" extrusion machine, from both of which tubes or rods can be extruded (Fig. 3).

The thermoplastic nature of Xylonite permits of its being blown, moulded or shaped when hot into any form from a table tennis ball to a battery box, and separate parts can be readily cemented together by suitable solvents. With suitable precautions against firing by friction, it can also be machined, stamped or drilled in exactly the same way as wood or metal.

#### Phenol-formaldehyde Resins

The starting material for the phenolic resins is phenol or cresol and formaldehyde, the latter being in the

form of a 40 per cent. aqueous solution, and the resin is formed by the reaction of these materials which unlike cellulose have no long chain characteristics to begin with.

The reaction is carried out by heating in digesters, *i.e.*, jacketed pots made of stainless-steel, nickel or copper, fitted with agitators and provided with reflux condensers, which prevent the escape of any vapours during the reaction. A battery of such digesters is shown in Fig. 4.

In order to promote the reaction between the phenolic substance and the formaldehyde a catalyst is used, which may be either an alkali or an acid, and the reactants are heated together in the digester at boiling temperature, for a short time if an alkali is used, for a substantially longer time and sometimes under pressure if an acid catalyst is employed. On cooling the water separates from the resinous layer and

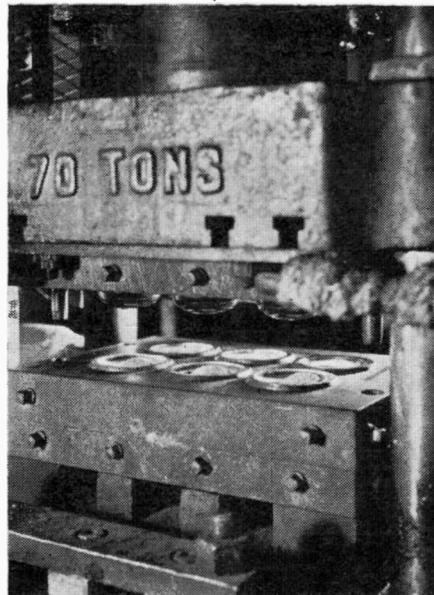


Fig. 8. Moulding of Bakelite (Press closing).  
Courtesy of Bakelite, Ltd.

may be run off and any remaining water dried off by distillation in vacuo. The resin is either dissolved directly in spirit for impregnation purposes or run off, cooled and ground.

Two different types of resin called resoles and novolaks are produced by alkaline and acid catalysts respectively. Resoles cure, *i.e.*, pass to the infusible insoluble or "resite" stage very quickly by heating alone, but novolaks or acid-catalysed resins are permanently soluble and fusible resins unless treated with further quantities of formaldehyde. Resoles are used in the production of laminated sheets, a very important process not mentioned in the general introduction. Dissolved in alcohol or emulsified in water they can be used to impregnate thin wood or paper (Fig. 5) and on pressing between heated platens they are consolidated into boards of any required thickness,

the resole changing by heat into hard infusible bakelite (Fig. 6). The novolak type of resin is used for moulding powders because to form them the incorporation of fillers and colours is necessary and if resoles were used, they would harden too quickly in the process of hot rolling required for incorporation. The easily fusible novolaks are therefore mixed with filler, which may be as much as 50 per cent. of the weight of the finished powder and may consist of wood flour for cheapness, cotton flock for toughness and asbestos for heat resistance. Colours are also added and the whole finally incorporated on hot rolls with hexamethylene tetramine, a compound of formaldehyde and ammonia, which provides the extra formaldehyde necessary to convert the novolak into the hard infusible form when it is finally moulded. The sheet material from the roll when cooled and ground to a suitable mesh is the raw material for the moulder, *i.e.*, for the third phase, the production of the finished article. Three self-explanatory illustrations are given (Figs. 7, 8 and 9) which are typical on a small and simple scale of all thermo-setting mouldings. The process is rapid because the press can be opened hot, and metal inserts of all kinds can be incorporated in mouldings.

The world production of moulding powder of the phenolformaldehyde type is the largest of any one kind of plastic and amounted in 1935 to 60,000 tons.

The powder can, although thermo-setting, also be extruded in a special machine, with a heating cycle adjusted so as to give just a long enough heating period to effect the final change to the fully heat-hardened resin. (Fig. 10).

The production of cast resin will be dealt with along with other special processes in a later article.

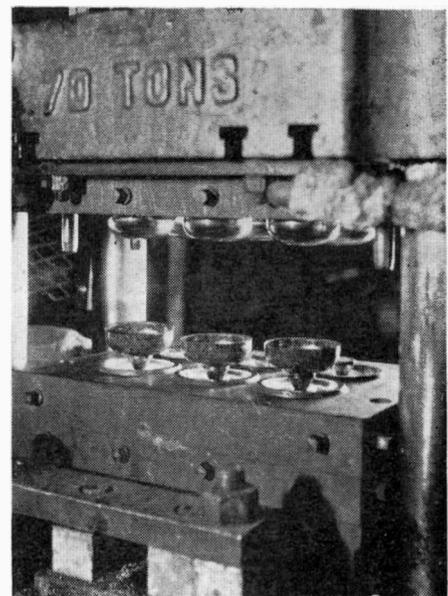


Fig. 9. Moulding of Bakelite (Finished. Mouldings ejected).  
Courtesy of Bakelite, Ltd.

# Frequency Modulation

## Part III. — Methods of Modulating the Frequency or Phase of a Carrier

By K. R. Sturley, Ph.D., A.M.I.E.E.

PREVIOUS articles have already discussed the particular features and advantages of frequency and phase modulation and we will now deal with methods of producing these types of modulation. The close relationship between frequency and phase modulation has already been shown and only a very slight circuit modification is necessary to convert frequency into phase modulation and vice versa.<sup>1</sup> The modification consists of inserting a frequency discriminating network in the modulator stage. A resistance R and inductance L connected between the audio frequency source and the frequency modulator (Fig. 1a) results in a phase modulated output because the RL circuit makes the A.F. voltage amplitude directly proportional to its frequency. This means that a constant amplitude variable frequency voltage at AB gives an amplitude proportional to its frequency ( $f_m$ ) across CD and the frequency deviation of the carrier is directly proportional to  $f_m$ , the condition for phase modulation. Similarly the RC circuit shown in Fig. 1b gives an amplitude across CD inversely proportional to  $f_m$  for a constant amplitude at AB and this in conjunction with the phase modulator produces a phase change of carrier inversely proportional to  $f_m$ , which is the characteristic of frequency modulation.

Frequency modulation of an oscillator may be accomplished by varying the equivalent inductance or capacitance of its tuned circuit, the magnitude of the L or C change being controlled in such a way that the resultant frequency change of the carrier is directly proportional to the modulating voltage amplitude. The required relationship between the frequency deviation of carrier and the L or C change is dependent on the magnitude of the ratio of the former to the carrier frequency. Probable values of frequency deviation and carrier are  $\pm$

$75 \text{ kc/sec.}$  and  $40 \text{ Mc.}$  so that  $\frac{f_{\text{dev}}}{f_{\text{carrier}}} = \pm .001875$ ; this low value makes simplifications in the analysis possible because it means that the ratio of change of inductance ( $\Delta L$ ) to the total inductance (L) of the tuned circuit is also small. For example, let

$$f_c = \frac{1}{2\pi\sqrt{LC}} \quad (1)$$

= initial carrier frequency

If the frequency deviation of carrier is  $\Delta f$ , we have:

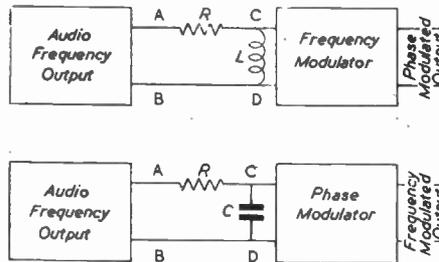


Fig. 1. (a) Phase modulated output from a frequency modulator. (b) Frequency modulated output from a phase modulator

$$f_c + \Delta f = \frac{I}{2\pi\sqrt{(L - \Delta L)C}} \quad (2a)$$

$$\text{and } f_c - \Delta f = \frac{I}{2\pi\sqrt{(L + \Delta L)C}} \quad (2b)$$

Combining (1) and (2a)—the result is the same if we use (1) and (2b)

$$\frac{f_c + \Delta f}{f_c} = 1 + \frac{\Delta f}{f_c} = \sqrt{1 - \frac{\Delta L}{L}}$$

$$= \left[1 - \frac{\Delta L}{L}\right]^{-\frac{1}{2}} \dots \dots (3)$$

Expanding by the Binomial theorem

$$1 + \frac{\Delta f}{f_c} = 1 + \frac{\Delta L}{2L} - \frac{3}{8} \left(\frac{\Delta L}{L}\right)^2 + \text{etc.} \quad (4)$$

but since  $\Delta f/f_c$  is very small it follows

that  $\Delta L/L$  is also small; hence  $(\Delta L/L)^2$  is negligible and (4) becomes

$$\frac{\Delta f}{f_c} = \frac{\Delta L}{2L} \quad \dots (5a)$$

$$\text{or } \Delta f \propto \Delta L \quad \dots (5b)$$

Similarly for a small change of capacitance  $\Delta C$

$$\frac{\Delta f}{f_c} = \frac{\Delta C}{2C} \quad \dots (5c)$$

$$\text{or } \Delta f \propto \Delta C \quad \dots (5d)$$

Undistorted frequency modulation can therefore be realised by making the change in L or C directly proportional to the amplitude of the modulating frequency. It is not always convenient to make a direct change of L and it may be necessary to obtain it by varying an inductance, or its equivalent, placed in parallel with L. The following equations then result:—

$$f_c = \frac{I}{2\pi\sqrt{\frac{LL_1}{L + L_1}C}} \quad \dots (6)$$

$$f_c + \Delta f = \frac{I}{2\pi\sqrt{\frac{LL_2}{L + L_2}C}} \quad \dots (7)$$

where  $L_1$  is greater than  $L_2$ . The lower deviation of carrier  $f_c - \Delta f$  yields a similar equation, but need not be considered.

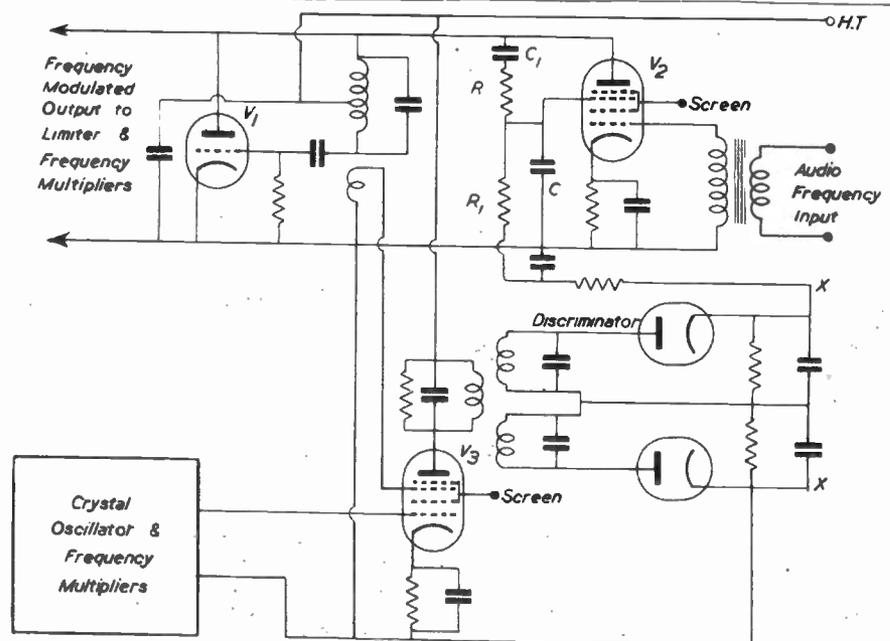


Fig. 2. Frequency modulation with stabilised variable reactance valve

$$1 + \frac{\Delta f}{f_c} = \sqrt{\frac{1 + \frac{L}{L_2}}{1 + \frac{L}{L_1}}} = \left[1 + \frac{L}{L_1}\right]^{\frac{1}{2}}$$

$$\left[1 + \frac{L}{L_1}\right]^{\frac{1}{2}} = 1 + \frac{L}{2L_1} - \frac{L}{2L_1}$$

if  $L_1$  and  $L_2 \gg L$

$$\text{thus } \frac{\Delta f}{f_c} = \frac{L}{2} \left[ \frac{1}{L_2} - \frac{1}{L_1} \right]$$

$$\text{or } \Delta f \propto \left[ \frac{1}{L_2} - \frac{1}{L_1} \right] \dots (8)$$

For  $\Delta f$  to be proportional to the modulating frequency amplitude, the latter must be proportional to  $[1/L_2 - 1/L_1]$  and we shall see later that this result can be achieved.

An electrical method for varying the inductance or capacitance of the carrier oscillator tuned circuit is obviously preferable to a mechanical one. The variable reactance valve (as used in automatic frequency correcting circuits) is particularly suitable for this purpose since it acts as a reactance to any voltage source connected between its anode and cathode, the value of the reactance depending on the grid bias of the valve. To realise this property it is necessary to supply the grid with a proportion of the anode voltage which has been given a phase shift of  $90^\circ$ . The basic circuit is that of Fig. 2; impedances  $Z_1$  and  $Z_2$  act as a potentiometer to step down and phase shift the grid voltage. Thus if  $Z_1$  is a resistance  $R$ ,  $Z_2$  a capacitance  $C$ , and the valve is a pentode or tetrode with a high internal resistance, the admittance across its anode and cathode (points A B) is given by

$$Y_{AB} = \frac{I_a}{E_a} = \frac{g_m E_g}{E_a}$$

where  $g_m$  = mutual conductance of the valve

$$Y_{AB} = \frac{g_m E_a Z_2}{Z_1 Z_2} = \frac{g_m Z_2}{Z_1 + Z_2}$$

$$= \frac{g_m}{1 + jR\omega C}$$

$$= \frac{g_m}{1 + (R\omega C)^2} - j \frac{g_m R\omega C}{1 + (R\omega C)^2} \dots (9)$$

which is equivalent to a resistance

$$R_{AB} = \frac{g_m}{1 + (R\omega C)^2} \text{ in parallel with an inductance } L_{AB} = \frac{g_m R\omega^2 C}{1 + (R\omega C)^2}$$

other combinations of  $R$  and  $L$  or  $C$  are possible and the resultant parallel resistance and reactance components of  $Y_{AB}$  are tabulated below

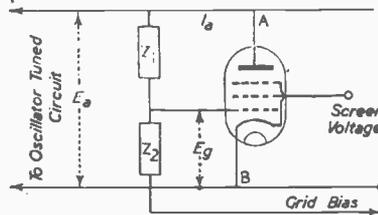


Fig. 2. Variable reactance valve circuit

From the first and fourth columns in the table we see that the equivalent inductance is inversely proportional to  $g_m$  so that expression (8) above becomes

$$\Delta f \propto g_{m2} - g_{m1}$$

and if the  $g_m E_g$  curve of the variable reactance valve is a straight line

$$\Delta f \propto E_{g2} - E_{g1}$$

Hence by inserting a modulating voltage in series with the D.C. grid bias the resultant variation of inductance produces a deviation of carrier frequency directly proportional to the modulating voltage amplitude. Similarly if  $g_m$  is proportional to  $E_g$ , the change in capacitance in columns 2 and 3 of the table means that  $\Delta f$  is proportional to the modulating voltage amplitude (see expression 5d).

It is not usual to employ the reactance valve to modulate an ultra high frequency oscillator; a lower carrier frequency is used and frequency multiplier stages inserted between it and the aerial to step up the frequency to the required 40 Mc/s. This has the advantage of simplifying reactance valve circuit design and of reducing interaction between the oscillator and succeeding amplifier stages. Furthermore greater oscillator stability is possible at lower frequencies. The resistance component  $R_{AB}$  is undesirable because it causes amplitude modulation, but by a suitable choice of  $R$  and  $L$  or  $C$  and a reduction of the resonant impedance ( $L/CR$ ) of the carrier tuned circuit this effect can be reduced to small proportions. A limiter may be inserted before the multiplier stages to reduce still further any amplitude modulation. For example if the oscillator frequency is 1,000 kc/sec.  $Z_1$  a capacitance of  $5 \mu\mu F$  and  $Z_2$  a resistance of  $5,000\Omega$ , mean  $g_m = 1 \text{ mA/volt}$ , and oscillator tuning capacitance  $200 \mu\mu F$ .

$$C_{AB} = \frac{g_m CR}{1 + (R\omega C)^2} = 24.4 \mu\mu F$$

total tuning capacitance =  $224.4 \mu\mu F$ .

$Z_1$	R	C	R	L
$Z_2$	C	R	L	R
$R_{AB}$	$\frac{1 + (R\omega C)^2}{g_m}$	$\frac{1 + (R\omega C)^2}{g_m (R\omega C)^2}$	$\frac{R^2 + \omega^2 L^2}{g_m \omega^2 L^2}$	$\frac{R^2 + \omega^2 L^2}{g_m}$
$X_{AB}$	$L_{AB} = \frac{1 + (R\omega C)^2}{g_m R\omega^2 C}$	$C_{AB} = \frac{g_m RC}{1 + (R\omega C)^2}$	$C_{AB} = \frac{g_m RL}{R^2 + \omega^2 L^2}$	$L_{AB} = \frac{R^2 + \omega^2 L^2}{g_m R\omega^2 L}$

the required change of capacitance  $\Delta C = \pm 224.4 \times .00375 = \pm 0.84 \mu\mu F$ . (note from the first part of the article and expression 5c that  $\Delta f/f_c = 0.001875$  and  $\Delta C/C = 2\Delta f/f_c = 0.00375$ ). This means a mutual conductance change of  $\pm 0.84/24.4 = \pm 0.0344 \text{ mA/volt}$ . The value of  $R_{AB}$  for  $g_m = 1 \text{ mA/volt}$  is  $40,400\Omega$  and it varies from  $41,800\Omega$  to  $39,000\Omega$ . If the oscillator coil has a  $Q$  of 50 giving a resonant impedance of  $35,500\Omega$ , the variation in amplitude due to the variation of  $R_{AB}$  corresponds to a modulation percentage of approximately 1.6 per cent. The variable reactance value can be placed across a part only of the oscillator coil if desired and this calls for a greater change of  $g_m$  to give a specified frequency modulation. Amplitude modulation by  $R_{AB}$  is slightly increased. The component  $R_{AB}$  can be made very high by the use of special circuits in the phase splitting network  $Z_1, Z_2$  or by negative feedback in the oscillator circuit.

When a reactance valve is used as a modulator it is essential to prevent change of  $g_m$  by means other than the modulating voltage amplitude; variation of HT, hum voltages due to the L.T., ageing of the valve, all can contribute to change of  $g_m$ . The first two effects can be reduced to small proportions by using two reactance valves in push-pull, but a more satisfactory method<sup>4, 5</sup> of maintaining carrier stability is to employ an automatic frequency correction circuit to control the D.C. bias on the reactance valve. A basic circuit is shown in Fig. 3. Valve  $V_1$  is the carrier oscillator (Hartley circuit) and  $V_2$ , a hexode valve, is the variable reactance device. The audio frequency voltage is applied at the first grid (the signal grid when  $V_2$  is used as a frequency changer) to control the mutual conductance of the third grid to which the RC phase splitting network is connected. The third grid (normally the oscillator grid) is used because its  $I_a E_g$  curve is more linear for large applied voltages than that of the first grid, and to get the required reactance change the valve must be connected across the major portion of the oscillator coil. Condenser  $C_1$  is the A.C. coupling between anode and grid and has a large value ( $0.1 \mu F$ ) whilst  $R_1$  has a resistance (about  $0.5 M\Omega$ ) large compared with the reactance of condenser  $C$ . In the first article we showed that a frequency modulated wave consisted of a central carrier frequency (equal to the unmodulated value) and sidebands. This

(Continued on page 600)

# Secondary Electron Problems in Beam Tetrodes

By J. H. OWEN HARRIES, A.M.I.E.E.

THE critical distance tetrode consists, in essence, of a structure a section through which is sketched in Fig. 1. Beams of electrons travel from the cathode to the anode as indicated. The beams are formed by an electron lens system which exists due to the configuration and relative potentials of the cathode, control grid and screen grid. This valve is of a type which first reached the market in 1935.<sup>1\*</sup> Some beam tetrodes are provided with "beam forming electrodes" of cathode potential such as those indicated by the dotted lines in Fig. 1. Critical distance valves were devised by the author in 1931,<sup>2</sup> and came into wide use under the name of the 6L6 beam tetrode when this valve was first marketed by the R.C.A. in 1936. Beam forming electrodes were used in these 6L6 valves.

The beam tetrode operates and has a "dynatron-free" characteristic because of the effect of a potential minimum due to space charge between the screen grid and the anode. In valves of the 6L6 and similar types, the beam forming plates exercise only a slight effect in producing the beam; but have an appreciable effect in producing the retarding potential;—indeed, tubes of this type first built up by the author in 1932 were looked upon by him as hybrids and as being somewhere between the pure beam tetrode and the pentode valve in which undesirable secondary electron current is got rid of by the action of a suppressor grid of zero potential positioned between the screen grid and the anode.<sup>11</sup>

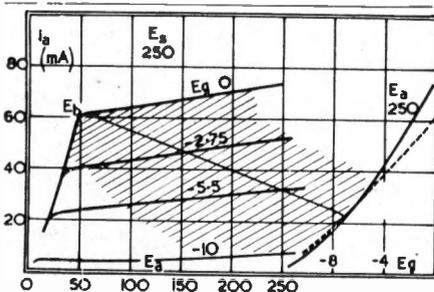


Fig. 2. Measured characteristics of critical distance tetrode.

An outline of the history of the beam tetrode has already been published.<sup>3</sup> Because, for instance, the Radio Corporation of America sells, at the moment, 17 receiving beam tetrode types and four transmitting types (including certain much publicised ultra-high-frequency vaves), it is not surprising that several mathematical theories have been published. Salzberg & Haeff, of the R.C.A. research staff, have published<sup>4</sup> one which may be taken as typical. Broadly speaking, this analysis consists of an ingenious mathematical treatment of a theoretical space

\*Figures refer to bibliography at end of article.

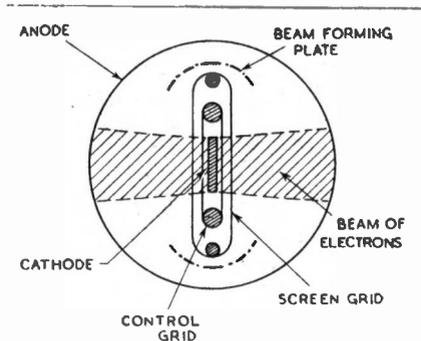


Fig. 1. Diagrammatic sketch of critical distance tetrode showing the electrode arrangement.

charge due to primary electrons between the screen grid and the anode, and deduces (quite correctly) that there can be a potential minimum. This was done by an extension of well-known space charge theories, such as that published some years ago with respect to triodes by Gill<sup>5</sup> and Tonks.<sup>6</sup>

It will, however, be shown in the present paper that the operation of the beam tetrode has not in fact been explained at all. The values of potential minimum deduced by the published theories are quite incapable of preventing a dynatron characteristic being produced and do not fit the facts in other ways. In fact, a new approach to the problem, and one involving other factors, is required.

### The Properties of Secondary Radiation

Certain facts about secondary electron emission which were published as long ago as 1922 have apparently escaped notice.

Fig. 2 shows typical anode characteristics of a critical-distance valve.

In such a beam tetrode a potential distribution may be expected somewhat similar to that sketched in Fig. 3. The potential minimum  $V_c$  corresponds to a retarding potential  $(1-V_a/V_c)$ , which tends to prevent the secondary radiation from travelling back from the anode to the screen grid. (It must not be forgotten, by the way, that secondary radiation of an appreciable amount may travel from the screen grid to the anode).

H. E. Farnsworth<sup>7</sup> published in 1922 the values of retarding potential required between the screen grid and anode to reduce the ratio of primary to secondary current to any desired amount. His method of measurement needed some slight corrections (afterwards made by him in 1928)<sup>8</sup> but is substantially correct.

The following table is plotted from Farnsworth's Fig. 5 of his 1928 paper,<sup>8</sup> and shows a typical result for iron. The results for nickel are much the same.

It is clear that a retarding potential

of a very considerable amount will be necessary if, when the anode voltage is raised from the knee value  $E_B$  (Fig. 2) to a value equal to the screen voltage, the working surface (shaded) of the anode characteristic is to remain substantially flat.

TABLE  
Relationship between retarding potential and secondary electron coefficient for iron.

Retarding potential $(1-V_c/V_a)$ .	Secondary radiation coefficient $(I_s/I_p \%)$ .
0.99	6%
0.95	6.5%
0.8	8.2%
0.7	9.5%
0.6	12.0%
0.5	13.5%
0.4	16%
0.3	18.5%

Fig. 4 is drawn from Farnsworth's and other information and shows a plot of retarding potentials against secondary radiation coefficient  $I_s/I_p$ , for various anode potentials.

Fig. 5 indicates a typical distribution of velocity of secondary electron emission from a metal target. It will be observed that there is a peak of emission at a velocity almost equal to the primary impact velocity. It has been shown by Farnsworth and by other workers<sup>9</sup> that this peak gets relatively less in magnitude as the anode voltage (impact energy on the anode) is increased from a small value up to the order of at least 250 volts.

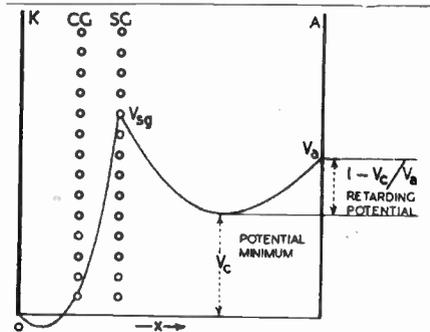


Fig. 3. The potential gradients in the critical distance tetrode. The arrangement of the electrodes is only diagrammatic.

The radiation coefficient  $I_s/I_p$  for all secondary electrons (disregarding their relative velocities) increases, in the case of a clean nickel anode, from a value of about 0.4 at an anode potential of 50 volts to about unity at an anode potential of 250 volts.

Davison and Kunsman<sup>10, 11</sup> and Tate<sup>12</sup> show that secondary emission from a plate anode travels almost entirely in the direction from which the primary electrons arrive.

It is clear that unless the retarding potential in a beam tetrode is very considerable (so that the operation is well to the left hand of Fig. 4), as the anode

potential increases from a knee value up to a value towards the screen voltage, the secondary electron current will increase rapidly and a dynatron characteristic will be found. For instance, if the knee of the anode characteristic is imagined to be at 50 anode volts, and if the retarding potential averages about 0.2, then the order of about 30 per cent. secondary radiation current will flow from the anode to the screen grid at anode potentials intermediate between the knee and screen voltage. The re-

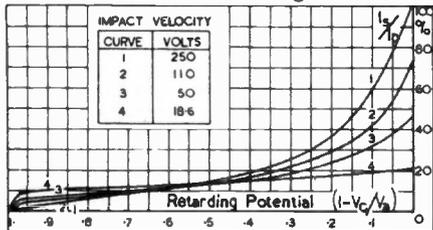


Fig. 4. Relationship between secondary radiation coefficient  $I_s/I_p$  and retarding potential for various impact velocities on the anode. Impact velocities are expressed in terms of anode volts (after Farnsworth and others).

sult will be a very pronounced dynatron type dip in the characteristic. The only way in which linear characteristics can be explained is by a comparatively complicated mechanism involving the use of retarding potentials of fairly high values at the left-hand end of Fig. 4. A theory of this kind is in course of preparation.

The problem is not merely one of preventing the passage of secondary radiation at one particular value of anode current, anode voltage and screen voltage. It is, on the contrary, that of maintaining a flat working surface to the characteristic over wide variations of these quantities.

The previous analyses, if quantitatively applied, produce a result such that, even if the potential minimum is sufficient at the knee voltage  $E_B$  (in Fig. 2), it is hopelessly insufficient when the operating locus travels down the load line in the direction of the arrow, the anode current drops and the anode voltage rises.

Referring quantitatively to the previous theories (of which that due to Salzberg & Haeff is taken as typical), these workers published a graph (their Fig. 7) which shows the values of potential minimum for various values of a dimensionless parameter  $P_a$ .  $P_a$  includes in itself such factors as the square root of the anode current and the reciprocal of the  $3/2$  power of the screen grid voltage. The anode current is therefore proportional to  $P_a^2$ . It is possible from this information to plot quantitatively the anode current characteristics predicted by the Salzberg & Haeff theory. This has been done in Fig. 6 of the present paper. In the author's opinion, it is difficult to see any resemblance between these predicted characteristics and those of an actual beam tetrode. The very large

hysteresis loop effects are not found in the beam tetrode. For instance, at  $P_a = 2$ , two "knee values" exist at  $V_a/V_g = 1$ , and at  $V_a/V_g = 0.35$ . Apart altogether, however, from this discrepancy, it is clear that for any "knee" to exist at a value of  $V_a/V_g$ , much less than unity (i.e., for a beam tetrode type characteristic to exist at all),  $P_a$  cannot be much greater than say 1.7 to 1.8 or so.

Moreover, again utilising Salzberg & Haeff's Fig. 7, it is possible to draw Fig. 7 of the present paper. This graph shows retarding potential plotted against  $V_a/V_g$  for various values of  $P_a$  which give knees that are below the screen voltage. Excepting for the left-hand end of the  $P_a =$  curve (which is unstable and therefore useless) the retarding potential does not exceed about  $0.15 V_a$ . A reference to Fig. 4 of the present paper shows that there is no possibility of the valve giving anything else than a pronounced dynatron characteristic. Apart, however, from this point, Salzberg & Haeff's theory fails in

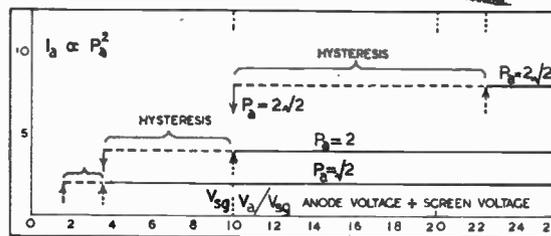


Fig. 6. Anode characteristics according to previous theory Plotted from Fig. 7 of Salzberg and Haeff.

another way, because it is clear that, even if at some particular point (such as X on Fig. 7 of the present paper) a certain amount of secondary radiation could be stopped, the slightest change of anode current or anode voltage would upset these conditions completely.

In other words, the Salzberg & Haeff theory shows a hysteresis effect which is not found in actual beam tetrodes; an insufficient retarding potential to prevent the occurrence of a dynatron characteristic, and, finally, no range of anode current and voltage over which suitable values of retarding potential are maintained to produce the very large area of substantially flat working characteristic existing in actual valves (see the shaded area in Fig. 2). A large working area is really the principal justification for the existence of the beam tetrode as a commercial device. It will be remembered that this valve was originally put forward,<sup>1, 10</sup> because it possessed a flatter working area of anode characteristic than other multi-grid valves, and therefore had a lower level of distortion for a given power output.

It is an experimental result that no satisfactory beam tetrode critical distance effect (i.e., dynatron-free characteristics) can be produced without the electrons being formed into a beam. (Fig. 1). The use of a focused beam for this purpose was first suggested by

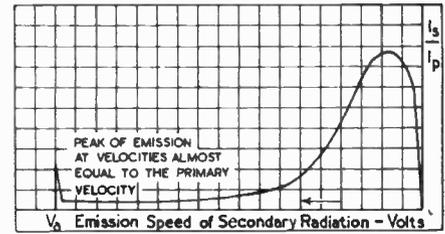


Fig. 5. Typical velocity distribution curve for secondary radiation. Impact velocity indicated by  $V_p$ .

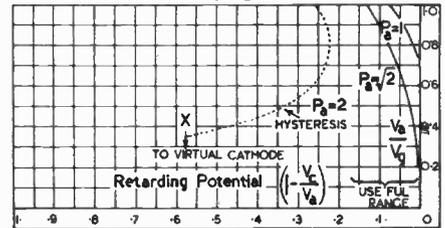


Fig. 7. Retarding potential according to previous theory. Plotted from Fig. 7 of Salzberg and Haeff.

the author<sup>2</sup>. It is noticeable that the beam becomes narrower and the electrons more bunched when the control grid is made more negative. This is a very important factor in maintaining the potential minimum when the anode current is reduced in value during operation.

In this paper the author has confined himself to pointing out certain information about secondary radiation which is apparently not too well known; and to a purely destructive criticism of the existing theories of the critical distance beam tetrode. What is hoped will prove to be an adequate theory is in course of preparation.

BIBLIOGRAPHY.

- 1 Harries, *Wireless World*, August 2nd, 1935.
- 2 Harries, British Patents 380429 and 385968/1931, and *Wireless Engineer*, April, 1936, Vol. 13, pp. 190-199.
- 3 Harries, *Wireless Engineer*, April, 1938, Vol. 15, p. 212.
- 4 Salzberg and Haeff, *R.C.A. Review*, Vol. II, No. 3, January, 1938, pp. 336-374; Dow, "Fundamentals of Engineering Electronics," Chapman and Hall.
- 5 Gill, *Phil. Mag.*, May, 1925, pp. 993 to 1,005.
- 6 Tonks, *Phys. Rev.*, October, 1927, pp. 501 to 511.
- 7 Farnsworth, *Phys. Rev.*, 1922, pp. 358 to 374.
- 8 Farnsworth, *Phys. Rev.*, March, 1928, Vol. 31, pp. 405-413.
- 9 (a) Haworth, *Phys. Rev.*, July 1st, 1935; (b) Davisson and Kunsman, *Phys. Rev.*, Vol. 22, No. 3, September, 1923, pp. 242 and 256; (c) Davisson and Kunsman, *Science*, Vol. 54, No. 1,404, November 25th, 1921, p. 522 to 524; (d) Tate, *Phys. Rev.*, Vol. 17, Series 2, No. 3, March, 1921, pp. 394 to 395; (e) Sharman (Communication by Professor Sir E. Rutherford), *Proc. Cam. Phil. Soc.*, Vol. 23, Part 5, January, 1927, pp. 523 to 530.
- 10 Harries, *Wireless Engineer*, February, 1937, Vol. 14, No. 161, p. 63.
- 11 Telleggen, British Patent 287958\*\*.



## MULLARD MEASURING APPARATUS

# MEASURING BRIDGE TYPE G.M.4140

A sturdy and compact instrument for the measurement of resistance and capacity. Built-in standards give direct measurement of resistances from 0.1 ohm to 10 megohms and capacities from 10 micro-microfarads to 10 microfarads. In the "open-bridge" position these ranges may be extended by the use of external standards, and a second scale is calibrated in terms of percentage differences.

Accuracy on all measurements is better than 2%.

The instrument operates from A.C. mains of 100-250 volts and is completely self-contained. It is unaffected by vibration and may be used in any location.

These features, together with the fact that it is extremely simple to use, make it the ideal instrument for routine factory measurements of resistances and capacities.

The use of the Mullard Bridge in the actual production line will greatly reduce rejects and consequent loss of time in "trouble shooting", while at the same time skilled labour will be set free for more valuable work.

Full technical details are given in a leaflet available on request. For a copy of this leaflet or for information about any of our instruments, send a postcard to the address below.

### RANGES

0.1—10 ohms.	10—1,000 ohms.
1,000—100,000 ohms.	0.1—10 megohms.
10 mmfd.—1,000 mmfd.	1,000 mmfd.—0.1 mfd.
0.1 mfd.—10 mfd.	

### DIMENSIONS

7" × 5½" × 5½"

### WEIGHT

6 lbs. approx.

**PRICE £14-14-0 nett**



THE MULLARD WIRELESS SERVICE CO. LIMITED

MEASURING APPARATUS SECTION

CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C. 2

# DATA SHEET No. XVIII

## The Self Capacity of Coils:- Its Effect and Calculation



EVERY inductance coil has distributed capacities between adjacent turns, and turns that are not adjacent; also every turn has distributed capacities to surrounding earthy objects or the screening can. In addition the coil may be fitted with terminals or tags and there will also provide an additional capacity.

The cumulative effect of the above capacities can in the majority of cases be fairly accurately represented by a fictitious capacity across the whole coil. (Fig. 1a). This fictitious capacity is known as the self-capacity or total distributed capacity of the coil.

While in some cases when the coil is connected across a low-loss condenser the effect of the self capacity may be absorbed in the tuning condenser, in other applications such as filters it may be necessary to provide pure inductance elements under which conditions self-capacities will prove very deleterious. (See Fig. 1a and b). While inductance coils are not normally employed at frequencies near their natural resonance  $f_0 \approx 1/(2\pi\sqrt{LC_s})$ , this resonance effect due to the self-capacity will produce absorption effects in multi-band receivers unless precautions are taken to prevent it.

### Effect on Inductance and Resistance.

Fig. 2a illustrates the case of an inductance  $L$  whose dissipative losses are represented by the series resistance  $r_1$  and the two are shunted by a loss-less self-capacity  $C_s$ .

The effect of  $C_s$  is to alter the apparent reactance of the circuit between the terminals A and B. For frequencies below resonance this circuit may be represented by an effective inductance  $L_e$  and resistance  $r_e$  in series, given by:-

$$L_e = \frac{L(1 - \omega^2 LC_s) - C_s r_1^2}{(1 - \omega^2 LC_s)^2 + \omega^2 C_s^2 r_1^2} \approx \frac{L}{(1 - \omega^2 LC_s)} \quad (1)$$

$$r_e = \frac{r_1}{(1 - \omega^2 LC_s)^2 + \omega^2 C_s^2 r_1^2} \approx \frac{r_1}{(1 - \omega^2 LC_s)^2} \quad (2)$$

$$f_0 = \frac{1}{2\pi\sqrt{LC_s}} \sqrt{1 - \frac{C_s r_1^2}{L}} \approx \frac{1}{2\pi\sqrt{LC_s}} \quad (3)$$




Fig. 1.

So that up to the natural resonance of the coil the effect of increasing frequency is to increase the effective inductance and resistance. At frequencies above the natural resonance the reactance becomes capacitive. When the dielectric of the component capacities of the total self-capacity (such as the coil former, wire insulation, dope, etc.) has not a negligible loss, a series resistance  $r_s$  has to be added to the capacity branch (Fig. 2b) to account for this loss. This loss resistance modifies equations (1) (2) and (3) to

$$L_e = \frac{C_s \left( \frac{L}{C_s} - r_1^2 \right) - \omega^2 LC_s^2 \left( \frac{L}{C_s} - r_2^2 \right)}{(1 - \omega^2 LC_s)^2 + \omega^2 C_s^2 (r_1 + r_2)^2} \quad (4)$$

$$r_e = \frac{r_1 + \omega^4 L^2 C_s^2 r_2 + \omega^2 C_s^2 r_1 r_2 (r_1 + r_2)}{(1 - \omega^2 LC_s)^2 + \omega^2 C_s^2 (r_1 + r_2)^2} \quad (5)$$

$$\approx \frac{r_1 + \omega^4 LC_s^2 r_2}{(1 - \omega^2 LC_s)^2}$$

$$f_0 = \frac{1}{2\pi\sqrt{LC_s}} \sqrt{\frac{L - C_s r_1^2}{L - C_s r_2^2}} \quad (6)$$

With dielectrics that will normally be encountered the power factor does not vary rapidly with frequency, so that over the tuning range of a coil the power factor remains almost constant. This implies that  $r_2$  is approximately inversely proportional to the frequency. The second term of the numerator of the second equation (5), i.e.,  $\omega^4 LC_s^2 r_2$  which represents the equivalent series

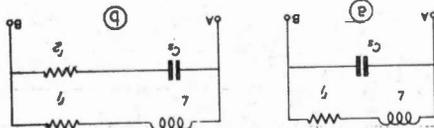


Fig. 2.

loss resistance due to the dielectric will in practice therefore vary only as  $f^3$  over the normal tuning range of a coil.

Just as it has been shown that the resistance  $r_2$  is a function of frequency, so in the case of the coil resistance  $r_1$ , it is found that this varies appreciably with frequency even over the normal tuning range of a coil. At the lower frequencies the A.C. component of the copper resistance  $r_1$  increases as  $f^2$  at high frequencies as  $f^{1/2}$ . Actually it is not the magnitude of the frequency, but the magnitude of the product of the wire diameter times the square root of the frequency that controls the rate of increase. In general therefore the A.C. component of the resistance  $r_1$  varies at a rate proportional to some power of the frequency between  $f^{1/2}$  and  $f^2$  depending on the constants and the frequency of operation.

### Calculation of Self Capacity.

There is no known accurate method of calculating the self capacity of a coil; however, Palermo (*Proc. I.R.E.*, July, 1934) has given a relation for short coils by means of which a useful estimate can be made of the value of  $C_s$  when the coil length is at the most not longer than the diameter of the coil. Palermo gives:


$$C_s = \frac{\pi D}{3.6 \cosh^{-1}(p/d)} \mu\mu F \quad (9)$$

$$= \frac{\pi D}{3.6 \log_e \left[ \frac{p}{2d} + \sqrt{\left(\frac{p}{2d}\right)^2 - 1} \right]} \mu\mu F \quad (10)$$

where  $D$  is the diameter of the coil winding between wire centres in cms.  $p$  is the pitch and  $d$  is diameter of the bare wire. ( $p$  and  $d$  must be in the same units). The above equation neglects the effect of the wire covering and coil former on the self capacity and will therefore in general give too low a value.

Equation (9) and (10) have been plotted on Data Sheet No. 19 for values of  $(p/d)$  up to 2.5 and coil diameters between 2 and 20 cms. As  $C_s$  is directly proportional to  $D$  the self capacity for larger coils may be easily read off the curves.

THE SELF-CAPACITY OF SHORT SOLENOIDS




$$C_s = \frac{\pi D}{3.6 \cosh^{-1} \frac{p}{d}} \mu\text{F.}$$

$l \neq D$

Electronic  
Engineering

DATA SHEET

No. 18.

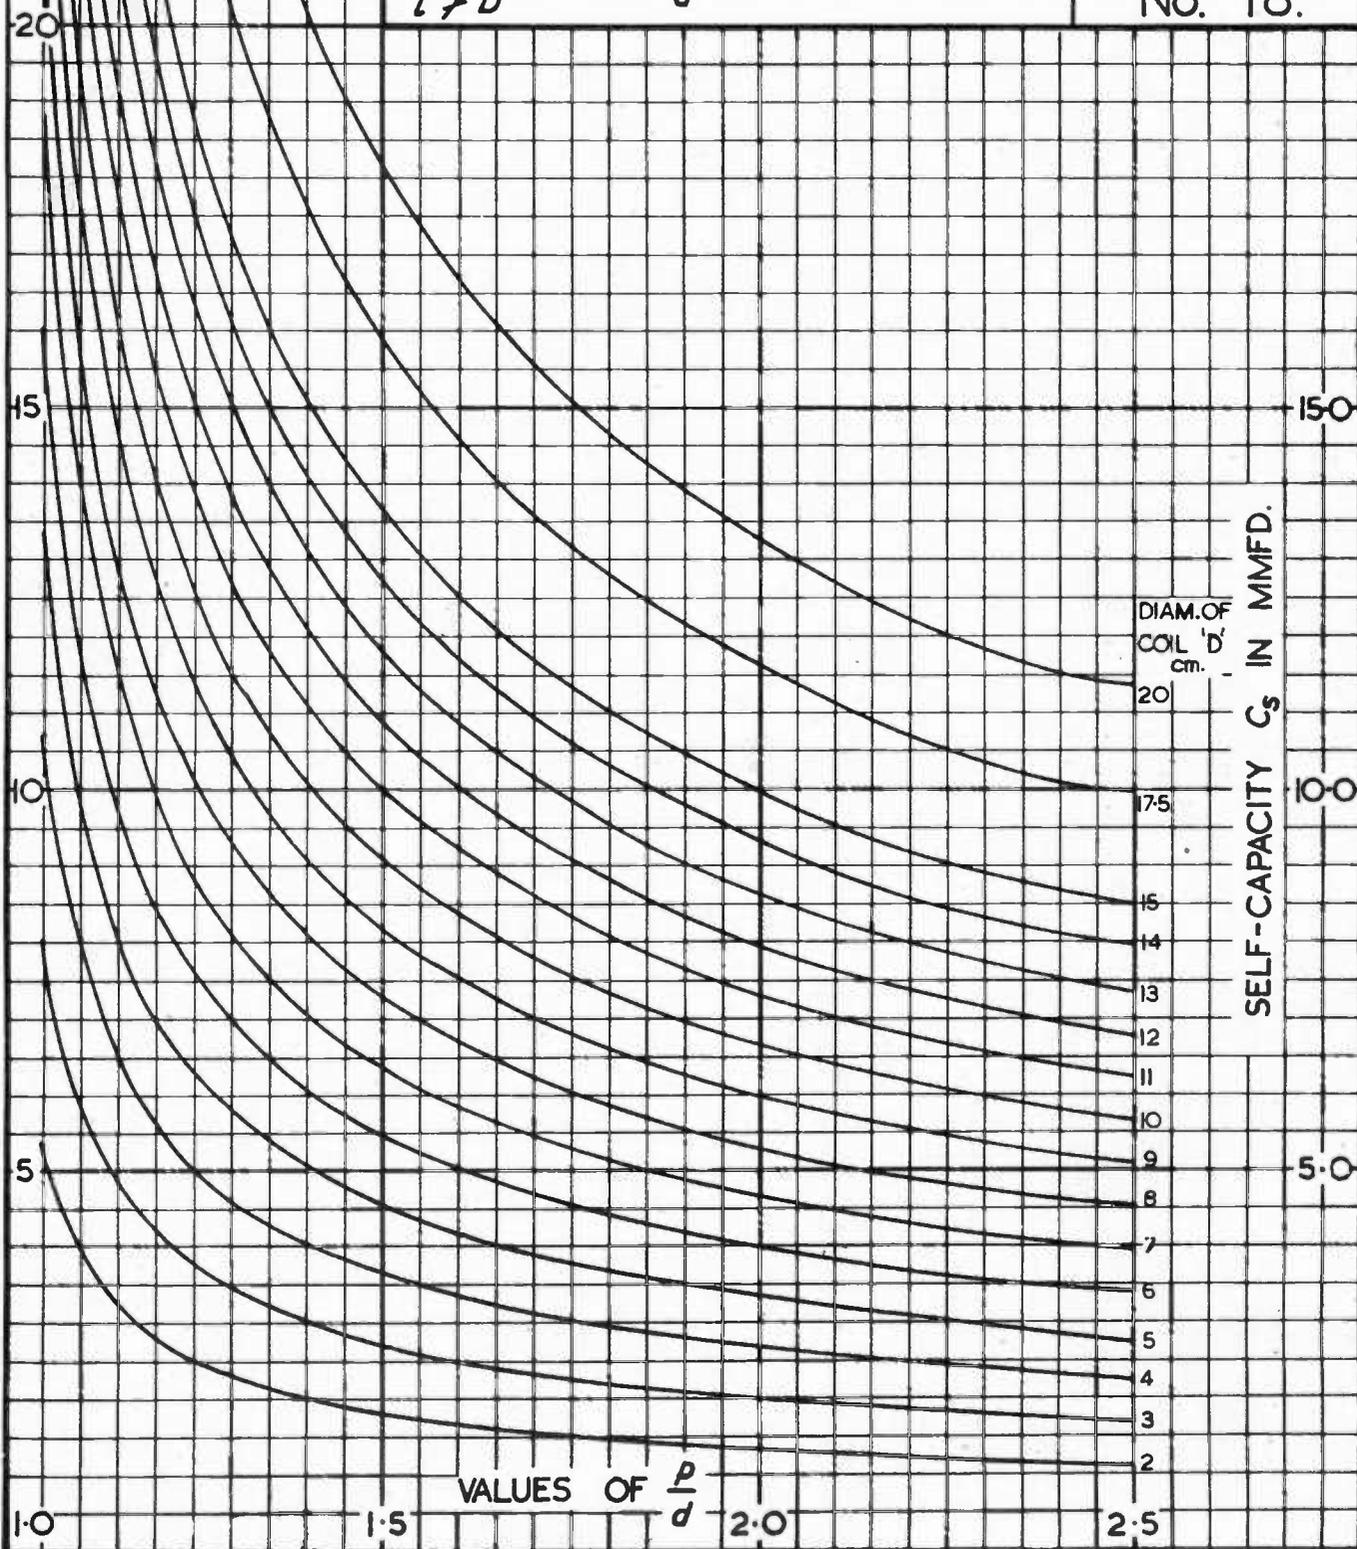

# DATA SHEET XIX

## Circuit Noise due to Thermal Agitation

OF all sources of noise present in a radio receiver the most fundamental and inevitable is that due to thermal agitation in conductors.

Thermal Agitation Noise is due to the free charge of any conductor being in random motion in equilibrium with the thermal motion of the molecules of the conductor, and this flow causes a random voltage to be developed across the terminals of the conductor.

The mean square value of this voltage is given by

$$\overline{E^2} = 4 k T \int_0^{\infty} R(f) df \quad \dots (1)$$

where  $T$  = absolute temperature of the generalised impedance  $R(f)$  in degrees Kelvin.

$k$  = Boltzmann's constant  $1.37 \times 10^{-23}$  watt sec. per degree.

$R(f)$  = Resistive component of any generalised impedance at frequency  $f$ .

If the noise-producing resistance or impedance  $R(f)$  is followed by an amplifier whose voltage amplification at any frequency  $f$  is given by  $A(f)$  then the mean square noise voltage at the output terminals of the amplifier is given by

$$\overline{E^2_T} = 4 k T \int_0^{\infty} R(f) |A(f)|^2 df \quad \dots (2)$$

If the frequency response of the amplifier is such that the voltage amplification is  $|A|$  between the frequencies  $f_1$  and  $f_2$  and negligible at all other frequencies (*i.e.*, perfect band pass amplifier: *see* Fig. 1) then equation (2) may be simplified to

$$\overline{E^2_T} = 4 k T |A|^2 \int_{f_1}^{f_2} R(f) df \quad \dots (3)$$

### Interpretation of $R(f)$ .

In equations (1) (2) and (3)  $R(f)$  represents the resistive component of any generalised impedance at a frequency  $f$ . The simplest possible case is that of a pure resistance  $R$  (*see* Fig. 1a) where  $R(f) = R$  at all frequencies and equation (3) may be further simplified to

$$\overline{E^2_T} = 4 k T |A|^2 R \Delta f \quad \dots (4)$$

where  $\Delta f = (f_2 - f_1)$  = pass band of amplifier in c.p.s.

The case of a pure resistance can only be approximated in practice when the pass-band of the amplifier is in the low spectrum at other frequencies the stray capacitances across the resistance must be taken into account (Fig. 1b). The resistive component of the impedance of the parallel RC combination is given by

$$R(f) = R \div (1 + \omega^2 C^2 R^2) \quad \dots (5)$$

and (3) becomes

$$\overline{E^2_T} = 4 k T |A|^2 R \int_{f_1}^{f_2} \frac{df}{1 + \omega^2 C^2 R^2} \quad \dots (6)$$

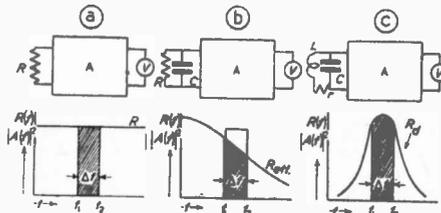


Fig. 1.

when the relative pass band is very narrow (*i.e.*  $2 \left( \frac{f_2 - f_1}{f_2 + f_1} \right)$  very small) expression (6) reverts to expression (4).

The most common source of thermal noise in receivers is due to the first tuned circuit (Fig. 1c). In normal circuits the dissipation loss of the tuning condenser is negligible compared to that of the inductance, and we can therefore concentrate all the resistance in the inductance branch. Under these conditions the resistive component  $R(f)$  of the impedance is given by

$$R(f) = \frac{r}{(1 - \omega^2 LC)^2 + \omega^2 C^2 r^2} \quad \dots (7)$$

and  $\overline{E^2_T} = 4 k T |A|^2$

$$\int_{f_1}^{f_2} \frac{r df}{(1 - \omega^2 LC)^2 + \omega^2 C^2 r^2} \quad \dots (8)$$

However, in (7) the resistance  $r$  is itself a function of frequency. If as before the relative pass band is very small (7) can be considerably simplified for when the circuit is tuned to resonance,

$$\text{i.e. } (1 - \omega^2 LC) = 0 \text{ and } R(f) = \frac{1}{\omega_0^2 C^2 r} = R_{dyn} \quad \dots (9)$$

where  $R_{dyn}$  is the Dynamic Resistance of the circuit at the resonant frequency  $\omega_0 = 2\pi f_0$ .

The resultant noise is therefore

$$\overline{E^2_T} = 4 k T |A|^2 R_{dyn} \Delta f \quad \dots (10)$$

While the thermal noise output of any system may be computed by evaluating the integral of (2), in most cases the result may be estimated from experimentally obtainable information.

Taking again the case of the tuned circuit we can consider this from the point of view that the thermal noise voltage is wholly produced by the series resistance  $r$  of the inductance  $L$ . In the case of an amplifier with a relatively narrow pass band  $f$  this noise voltage is stepped up to a value  $V_1$  by magnification of the tuned circuit  $Q = (\omega_0 L)/r = 1/\omega C r$

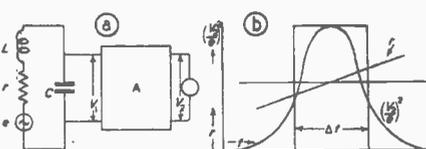


Fig. 2.

The mean square noise voltage at the output of the amplifier is then

$$\overline{E^2_T} = 4 k T r (1/\omega_0 C r)^2 |A|^2 \Delta f = 4 k T R_{dyn} |A|^2 \Delta f \quad \dots (11)$$

as before.

In the more general case where the relative pass band of the amplifier is not very small, the square of the voltage step-up of the tuned circuit is given by

$$1 \div (1 - \omega^2 LC)^2 + (\omega C r)^2 \quad \dots (12)$$

The product of this multiplied by the square of the voltage gain of the amplifier can be obtained by injecting a small signal from a very low resistance source (such as a Q-meter) in series with the inductance  $L$  and measuring the output voltage  $V_2$  (*see* Fig. 2a).  $(V_2/e)^2$  is then plotted against frequency (Fig. 2b) and the equivalent band width  $\Delta f$  is given by the width of the rectangle having the same height as and an area equal to that enclosed by the  $(V_2/e)^2$  curve. As the resistance  $r$  will vary at some rate proportional to functions of  $f^2$  and  $f^3$  it is possible to estimate the equivalent value of  $r$  over the pass band by erecting another rectangle of width  $\Delta f$  for the curve of  $r$  against  $f$ . (Fig. 2b).

In many cases it is more important to be able to compare the relative values of the noise voltages due to circuit thermal and valve shot effects at the grid of first valve. To obtain the mean square thermal noise voltage at the first valve grid, we divide the height of the  $(V_2/e)^2$  rectangle by the square of the amplifier gain at resonance  $V_2/V_1 = |A|^2$ . As the height of the new rectangle so obtained is  $(1/\omega_0 C r)^2$  the mean square noise voltage when  $r \propto f$  is

$$\overline{E^2_T} = 4 k T R_{dyn} \Delta f \quad \dots (13)$$

In general the R.M.S. thermal noise voltage at the first grid will be given by

$$E_T = 7.4 \times 10^{-6} T R_{dyn}^{1/2} (\Delta f)^{1/2} \text{ microvolts} \quad (14)$$

where  $\Delta f$  is in c.p.s and  $R$  in ohms. At a room temperature of  $20^\circ \text{C}$ ,

$$T = (273 + 20)^\circ \text{K and}$$

$$E_T = 1.27 \times 10^{-4} R_{dyn}^{1/2} (\Delta f)^{1/2} \text{ microvolts} \quad (15)$$

The approximate method given above is quite satisfactory in the usual case where the pass band is small compared with the mid-frequency. For greater accuracy where  $R(f)$  may vary appreciably, the  $(V_2/e)^2$  curve should be multiplied by the ordinates of the  $R(f)$  curve and the rectangle erected about the resultant curve to determine  $\Delta f$ .

Equation (15) has been plotted as a series of curves on Data Sheet No. 19 where the R.M.S. thermal noise in  $\mu\text{V}$  across any resistance  $R$  is given for values of  $\Delta f$  between 1,000 c.p.s. and 10,000,000 c.p.s. Thus for example the noise produced by a resistance of 10,000 ohms would be  $1.27 \mu\text{V}$  when it is stepped up by an amplifier with an effective pass band  $\Delta f = 10,000$  c.p.s. and  $28 \mu\text{V}$  when  $\Delta f = 5,000,000$  c.p.s.


THE  
THERMAL AGITATION  
NOISE VOLTAGE  
OF A RESISTANCE @ 20°C

**Electronic  
Engineering**

DATA SHEET  
No. 19

$$E_T = 1.27 \times 10^{-4} \cdot R^{\frac{1}{2}} \cdot \Delta f^{\frac{1}{2}} \mu V_{r.m.s.}$$

$R$  - Resistance in ohms  
 $\Delta f$  - Total bandwidth cps

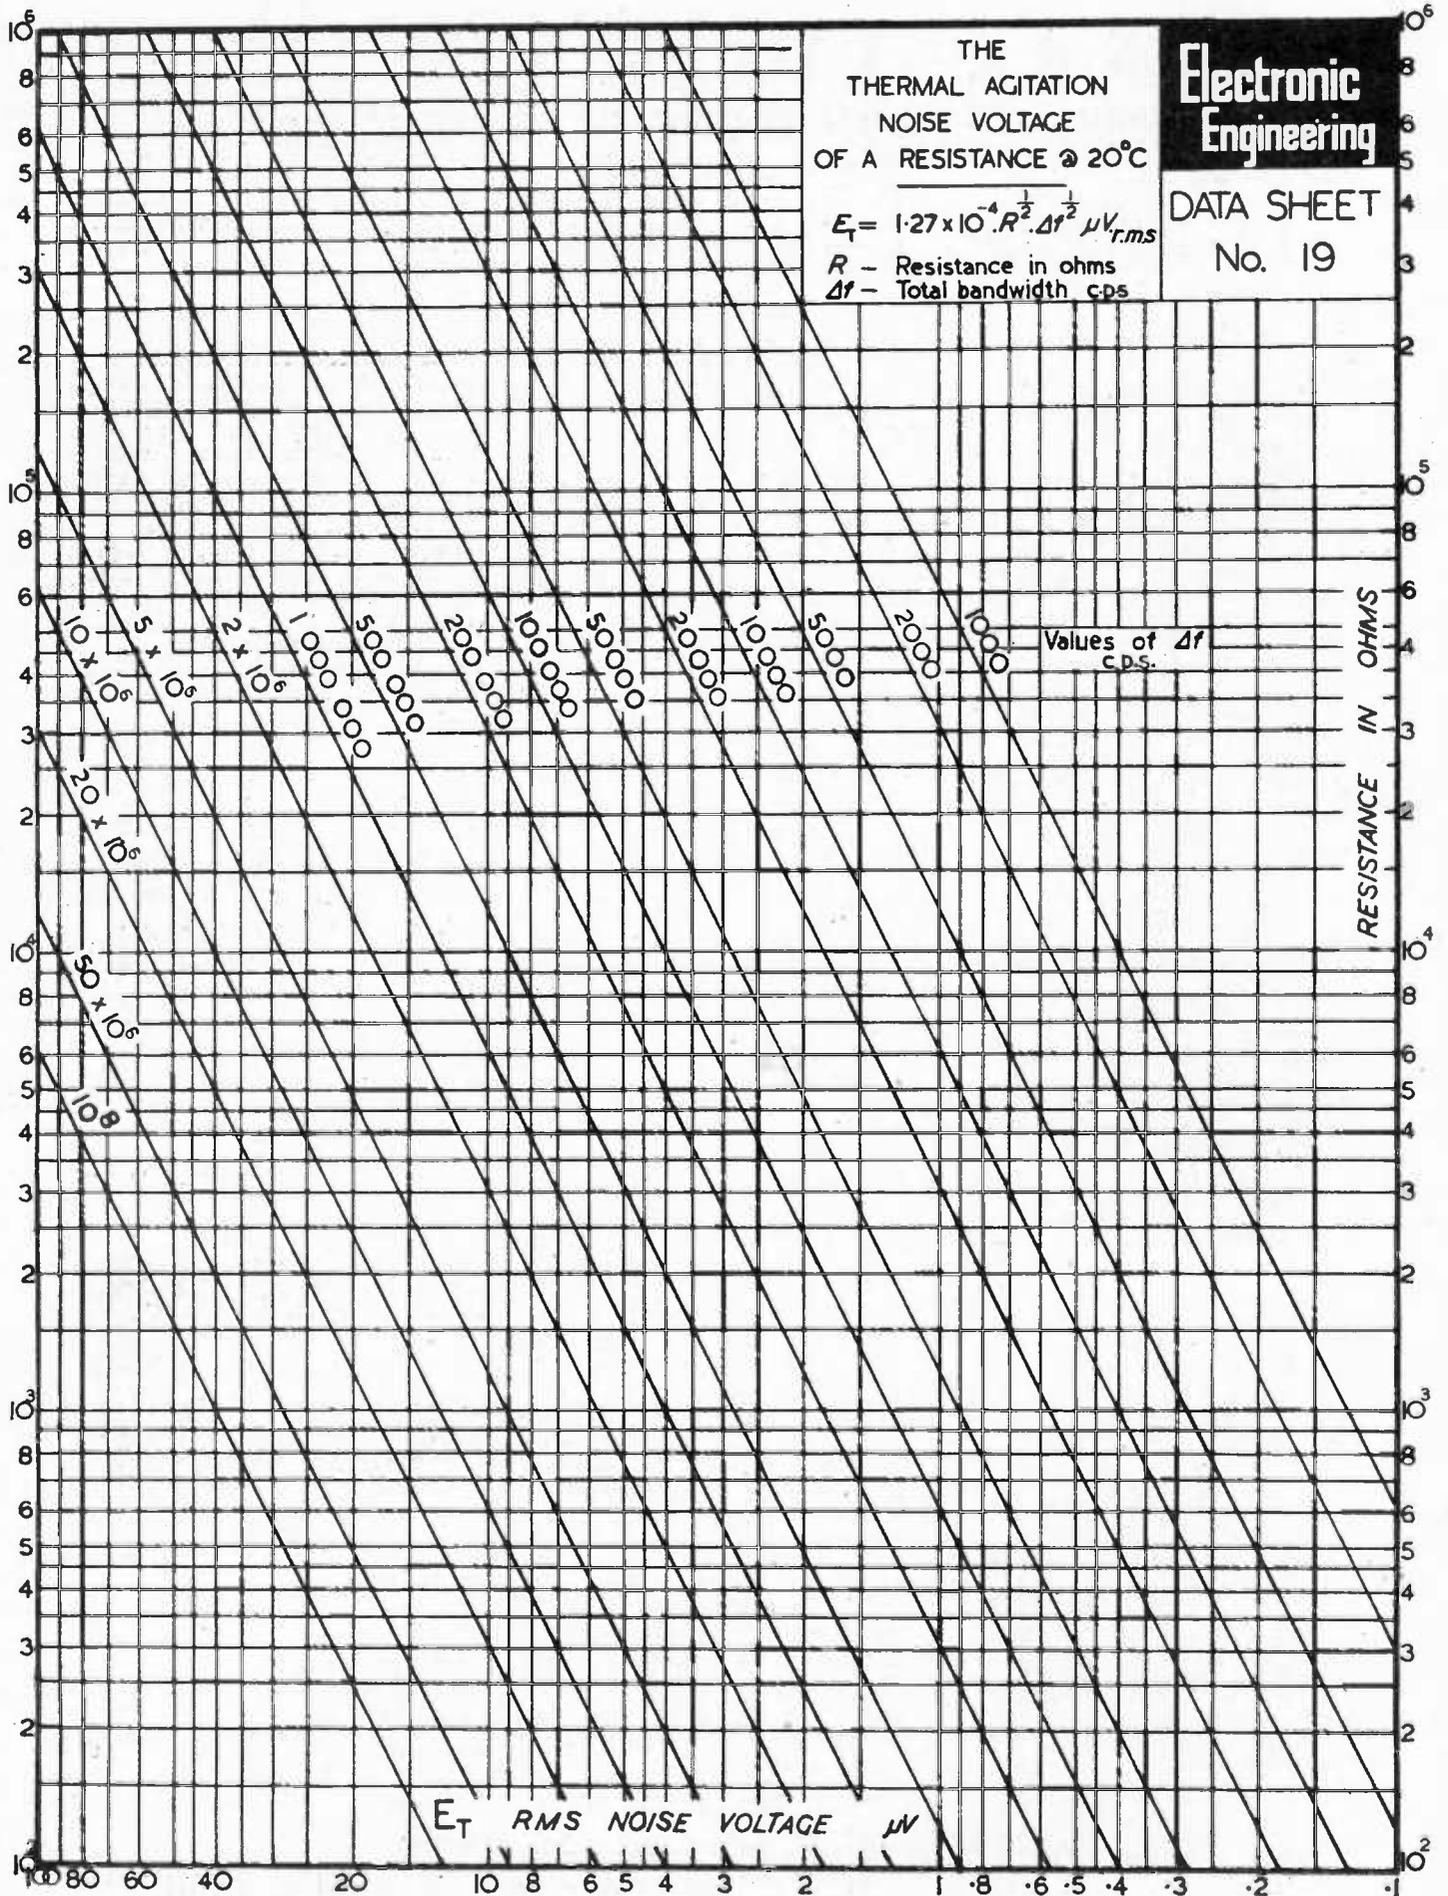

# BAKELITE *Laminated*



BAKELITE Laminated is available in sheet, rod or tube form and is characterised by a combination of physical properties which make it suitable for an infinite variety of purposes. There are 50 principal grades of BAKELITE Laminated covering all types of industrial requirements and complying with Government and B.S. specifications. Thicknesses range from .004" to 4" and standard sheets are 8' x 4' and 7' x 3'. Technical data sheets, giving full information on the physical, electrical and mechanical properties of each grade are available.



**BAKELITE LIMITED**  
**BRACKLEY, NORTHANTS**

Telephone : Brackley 144 (4 lines).    Telegrams : "Bakelite, Brackley."  
 London Office : 18 Grosvenor Gardens, S.W.1.    Telephone : Sloane 9911

THE MATERIAL OF INFINITE USES

# Stable Admittance Neutralisation

IN resistance-coupled amplifiers a limit is set to the degree of amplification by the presence of stray capacity shunted across the anode-load resistance. A method for reducing the stray capacity, which may be quite large, as it is, for example, when contributed to by the capacitive component of admittance of a subsequent valve, has been proposed by Herold, of R.C.A. As originally suggested by Herold\* the method suffered from the disadvantage of instability. Briefly, it was proposed by the use of an auxiliary valve possessing a negative mutual conductance to supply the capacity current that would otherwise require to be supplied by the valve working into the stray capacity. The auxiliary valve is arranged so that the stray capacity forms part of its input circuit admittance. Any potential applied to its grid appears in view of its negative conductance as a potential in like phase upon its anode, and if the latter is the larger, a current is fed from anode to

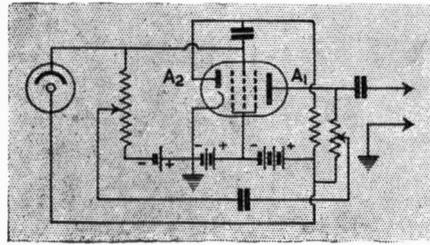


Fig. 1. Neutralisation by means of a special valve.

to fluctuations in supplies, for example, are likely to occur in normal circumstances, which will cause the circuit to pass over into the oscillating state. It has now been suggested by Herold that this difficulty can be overcome by stabilising the auxiliary valve by the proper application to it of a sufficient degree of anti-phase, that is to say, purely degenerative, feedback.

Various ways in which the stabilisation can be carried out are indicated in the figures shown.

Fig. 1 shows an arrangement in which a special valve co-operates with a photo-cell, where for the sake of uniform sensitivity over a wide range of frequencies, it is quite clear that stray capacity should be removed as far as possible from across the load resistance of the photo-cell. The special valve is of a dual character, and provides two outputs, one with a positive and one with a negative transconductance. It consists of a cathode surrounded by two screening grids, between which lies a control grid, and outside these grids lies the anode  $A_1$  having a positive transconductance associated with it. The anode indicated as  $A_2$  is located between the cathode and the innermost screening grid, and actually consists of two conductors arranged on either side of the cathode. In operation, as the potential of the control grid becomes increasingly negative, less electrons pass on to the anode  $A_1$ , but more are reflected back to the anode  $A_2$ . Thus the anode  $A_2$  has associated with it a negative transconductance, and by con-

necting it to the control grid through the condenser  $C_m$  neutralisation of capacity associated with the control grid can be carried out to a large degree. Between the anode  $A_1$  and the control grid it will be noticed that there is a degenerative feedback connexion through the condenser  $C_0$ , and this has the necessary effect of stabilising the current in the valve.

Fig. 2 simply shows a circuit of the kind as described, but adapted for working with a balanced input.

Fig. 3 indicates a slight modification, feedback being obtained by a resistance connected in the cathode lead of the valve. So that degenerative feedback is not applied to the auxiliary portion of the valve, that is to say, so that there is no negative feedback from the anode  $A_2$ , a condenser is arranged to by-pass current from the anode  $A_2$  directly to the cathode, so that it does not flow through the cathode resistance.

Fig. 4 illustrates an arrangement

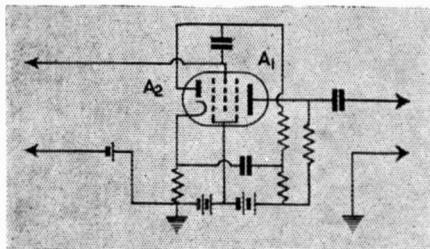


Fig. 2. The circuit of Fig. 1 adapted for balanced input.

grid when an impedance is connected between the two. If the impedance is capacitive a capacitive current will flow to the grid, and if of the right magnitude, can supply exactly the current that would normally be taken by the stray capacity from the preceding valve. Thus, if this right magnitude could be achieved, as far as the preceding valve is concerned, the stray capacity would be neutralised. It is found, however, that before neutralisation becomes complete, instability sets in, due to the feedback capacity which inevitably forms part of the anode load of the auxiliary valve, bringing about a phase lag in the anode potential and thus a certain degree of regenerative feedback in the grid circuit which may be sufficient to neutralise the positive resistive component of input admittance.

It is also found, however, that a highly useful degree of neutralisation can be obtained by working very near to the oscillating point; but this is not a commercial proposition, since small fluctuations in the valve constants due

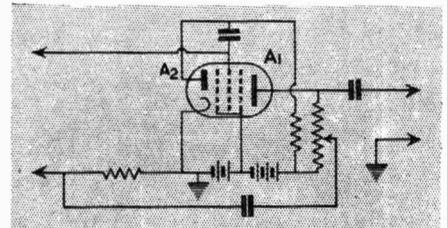


Fig. 3. A modified circuit in which feedback is obtained from the cathode resistance.

where the functions of the special valve are performed by an arrangement of two valves,  $V_1$  and  $V_2$ , in cascade. Both valves have applied to them negative feedback to stabilise their characteristics, this feedback being obtained by cathode resistance, and the capacity-neutralising currents are fed back from the anode of  $V_2$  to the control grid of  $V_1$ , through condenser  $C_m$ .

With circuits such as have been described, it has been found possible to reduce stray capacity to such an extent that an increase in gain of some forty times can be achieved as compared with conventional circuits. This increase in gain is equivalent to an additional stage of amplification, and in the arrangement of Fig. 1 it has been found possible to employ a load resistance for the photo-cell of 23 megohms for a cut-off frequency of 20,000 cycles per second.

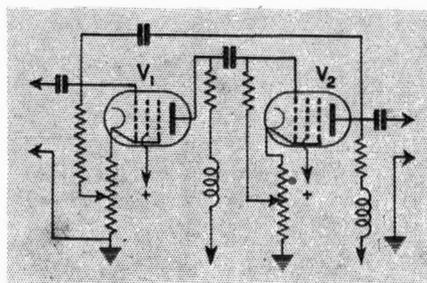


Fig. 4. The special valve of Fig. 1 replaced by two valves in cascade.

The fact that goods made of raw materials in short supply owing to war conditions are advertised in this magazine should not be taken as an indication that they are necessarily available for export.

\* Proc. I.R.E., November, 1937, p. 1399.

# BX DISTRENE

**THE ONE FOR THE LOAD**

BX Distrene, the modern insulating material, has properties which make it a first choice for radio and high frequency applications. Look at the figures below, and you will see why the call for it is so insistent. Its low loss factor at high frequencies is unrivalled; so is its high dielectric strength. And that's not all. Specific gravity is almost equal to that of water; compression strength is 7 tons per square inch; and water absorption rate over 24 hours is nil.

BX Distrene is available in sheets, rods and tubes; also as a powder, in all colours, for injection moulding. Owing to its low density, it yields more mouldings per pound of material and has a faster moulding cycle than any other class of injection moulding powder.


May we send you samples and further details?

SPECIFIC GRAVITY . . . . .	1.06 . . . . .
WATER ABSORPTION . . . . .	NIL . . . . .
COEFFICIENT OF LINEAR EXPANSION . . . . .	.0001 . . . . .
SURFACE RESISTIVITY (24 hours in water) . . . . .	$3 \times 10^6$ megohms
DIELECTRIC CONSTANT 60 - $10^6$ CYCLES . . . . .	2.60 - 2.70 . . . . .
POWER FACTOR UP TO 100 MEGACYCLES . . . . .	.0002 - .0003 . . . . .

MAKERS OF PLASTICS SINCE 1877

**BX Plastics Ltd.,** LONDON E4 AND ELSEWHERE

# A GERMAN PORTABLE TRANSMITTER

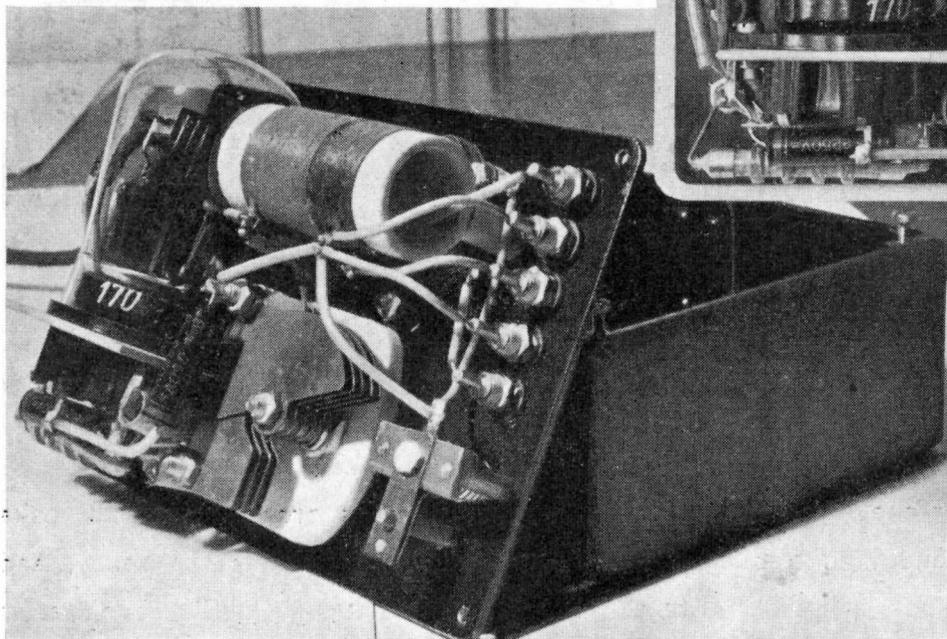

The photographs show two views of the interior of a single valve portable transmitter used by enemy agents.

The aerial tuning coil is wound on a Steatite former and connexion to the batteries is made by the multicore cable seen on the left of the upper photograph.

The valve used is the Telefunken KL2.

(By permission of the Ministry of Aircraft Production)

## BOOK REVIEWS

### Thermionic Valves in Modern Radio Receivers.

A. T. Witts, 213 pp. 135 figs. (Pitman—10/6 net.)

This is the second edition of this book, which first appeared in 1936. Notes have been added on the output tetrode and beam valves in addition to negative feedback. An entirely new chapter on mains rectifiers has also been included in this edition.

The book deals with the theory and practice of valves and valve circuits in a thorough and practical manner, commencing with the theory of thermionic emission and dealing in turn with detectors, high- and low-frequency amplifiers, output valves and frequency changers. The chapter on push-pull output stages is particularly good and covers Class A and Class B operation and the variety of paraphase circuits.

Some of the diagrams would be improved by the addition of typical component values, but there is an excuse for omitting these in a book which aims to deal with fundamentals rather than specific design.

The criticism sometimes made by American reviewers that there are insufficient diagrams in British textbooks cannot be levelled at those of Mr. Witts. There is a diagram on every other page, which adds considerably to the value of the book to the student.

### Radio Upkeep and Repairs for Amateurs.

By the same Author. 212 pp. 136 figs. (Pitman—6/6 net.)

The popularity of Mr. Witts as an author is shown by the fact that this is the fifth edition, the first appearing in 1933.

Chapters are included on common faults and how to clear them, testing components, care of batteries and accumulators, and fitting pickups to receivers.

A new and useful chapter has been inserted at the beginning on test equipment and how to construct it, giving full details on the assembly of a universal meter and test box. A second new chapter deals with design of mains receivers.

The book is full of useful suggestions which will be appreciated by the service engineer in addition to the amateur—in fact, the last two words of the title might be omitted from future editions!

### Radio Engineers Pocket Book.

F. J. Camm. 132 pp. (Geo. Newnes—3/6 net.)

Many readers who collected the tables and data sheets issued some time ago in *Practical Wireless* may not appreciate that this pocket book contains that information and more in a convenient booklet form. In addition to the usual radio design data the book contains tables of physical constants, logs, and mechanical data (B.A. sizes, twist drills, etc.).


The copper wire and eureka wire tables are particularly useful with the inclusion of a column of "inches per ohm" and "pounds per ohm." On p. 84, however, in the table of musical frequencies, the author has not altered the scale to conform with the new standard A 440 (C' 523) which was agreed internationally in 1939. No doubt this will be corrected in the next edition.



## VIBRATORS *for Dependable Power*

Representing the results of several years research into vibratory technique, they embody the most recent development of British and American design, and are manufactured in this country by British craftsmen.

If you have a "vibratory" problem our technical staff will be pleased to co-operate in its solution.

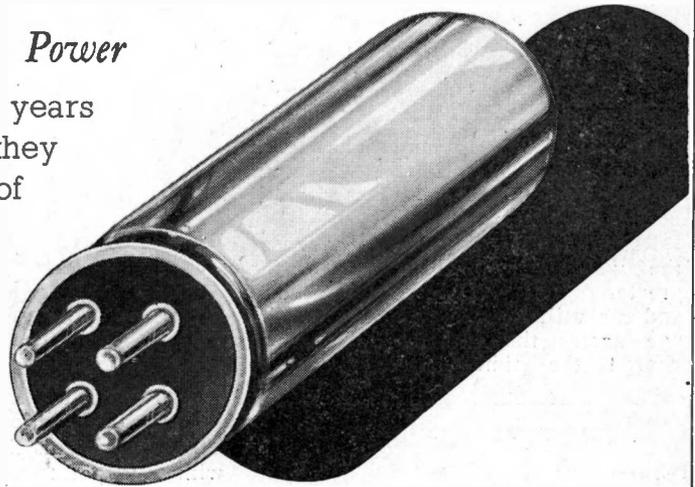

*Manufactured under "OAK" Patents 460470 etc., etc.*

# WRIGHT & WEAIRE LTD.

(WEARITE COMPONENTS)

HIGH ROAD, TOTTENHAM, N.17. Telephone: Tottenham 3847-8-9

## Resolution on Quality

In January most men's thoughts turn quasi-seriously to resolutions. Off-hand, we don't remember if January 1st saw the first Gardner Transformer, but we do know that we made a resolution that it would be as good as the finest materials, coupled with human skill, could achieve. And that resolution is renewed, not each January, but with the making of each Transformer. So when next you are needing really good small Power Transformers up to 4 kva. we'll gladly co-operate with you—the resolutions included, of course,



**GARDNERS RADIO LIMITED**  
Somerset • Christchurch • Hants



## Spare-Time Training by Post in all Electrical Subjects

The International Correspondence Schools, largest and most successful institution of its kind in the world, offers thoroughly sound Courses of instruction to cover the following subjects —

- |   |  |
|---|--|
| <b>Complete Electrical</b>                      | <b>Electric Illumination and Heating</b> |
| <b>Electrical Designing</b>                     | <b>Hydro-Electric</b>                    |
| <b>Electric Lighting</b>                        | <b>Oil-Power Electric</b>                |
| <b>Electric Power</b>                           | <b>Power-House Attendants</b>            |
| <b>Electric Traction</b>                        | <b>Steam Electric</b>                    |
| <b>Electrical Transmission and Distribution</b> | <b>Telegraph Engineering</b>             |
|   | <b>Telephone Engineering</b>             |

Also the following Examinations —

- Associate Membership, I.E.E.**
- City and Guilds Elec. Eng. Practice, Elec. Installation and Telecommunications**
- P.M.G. Certificate for Wireless Operators**
- Provisional Certificate in Radio Telephony and Telegraphy**

WRITE FOR OUR SPECIAL FREE BOOKLET

(Use this Coupon. Penny stamp on unsealed envelope)

### INTERNATIONAL CORRESPONDENCE SCHOOLS LIMITED

Dept. 68, International Buildings, Kingsway, London, W.C.2.  
Please send your Booklet "Electrical Engineering" (72 pages).

I am especially interested in .....

Name..... Age.....

Address .....



# An Improved Hard Valve Time Base

by M. G. Saunders

ONE of the first successful hard valve time bases was the well-known "squegger" circuit of Watson-Watt, Appleton and Herd. The main disadvantages lay in a slightly more complex layout and difficulty in synchronisation. Further, the output voltage was small, necessitating amplification in most cases.

Reid\* has described a modification of the "squegger" which has a far greater output voltage, is more stable and can utilise the high negative voltage across the cathode-ray tube to charge the time base condensers

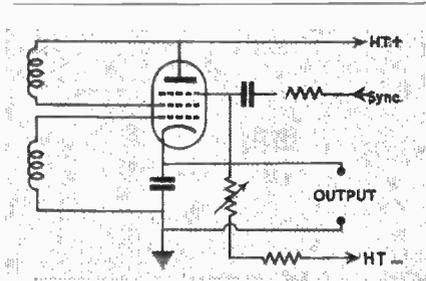


Fig. 2.

source and if this is the vertical amplifier it causes serious intermodulation. To overcome this the following circuit, with a separate synchronising valve may be used. (Fig. 3).

This circuit is a further modification of Reid's in certain respects—the time base valve is now a triode and the anode coil is parallel fed, with an H.F. choke as the anode impedance. The synchronising valve is fed from a resistance common to the two valves and acts as a modulator, an impulse on the grid varying the anode current and so the voltage

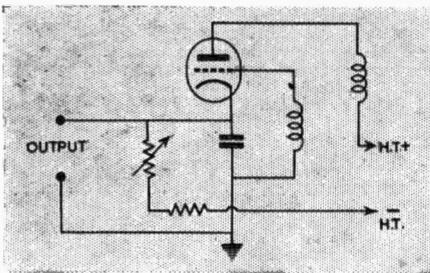


Fig. 1.

through a resistance. The basic circuit is shown in Fig. 1 and for further details the article referred to should be consulted.

With a pentode (Fig. 2) in place of the triode, Reid used the suppressor grid as a point at which to inject the synchronising signal. The suppressor grid is connected to the cathode condenser, however, and it is across this that the sweep voltage develops, resulting in feed-back to the synchronising

\*(Wireless World, April 14, 1938, p. 334).

drop across the resistance. This in turn varies the sweep voltage and hence the sweep frequency; with a sweep frequency similar to (or a multiple of) the synchronising frequency there will be strong locking between the two.

A circuit used in practice is shown in Fig. 4. Any valves will do provided that  $V_1$  will oscillate at high frequencies;  $V_2$  can quite well be a small output pentode. Coil L consists, in this case, of 8-10 turns of 16 gauge copper wire, tapped to earth at a point to give maximum sweep voltage. The choke is

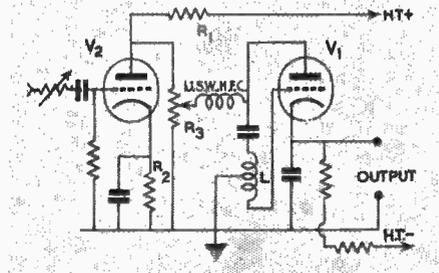


Fig. 4.

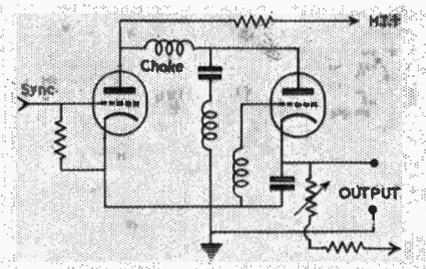


Fig. 3.

an Eddystone U.S.W.H.F. type,  $R_1$  some 5,000 ohms,  $R_2$  to suit the sync. valve and  $R_3$  a potentiometer to vary the sweep voltage.

The sweep voltage is high, up to half or more of the anode voltage. The speeds can vary from the lowest to two or three megacycles with careful design; the synchronising voltage is very low with negligible power consumption, locking sweep frequencies twenty to thirty times slower, and finally the fly back is practically invisible except at excessive brilliance.

## ARDUX WELDS PLASTICS

APPROVED FOR AIRCRAFT USE

MADE BY

**AERO RESEARCH LIMITED**

PIONEERS OF SYNTHETIC ADHESIVES

**DUXFORD CAMBRIDGE** TELEPHONE SAWSTON109



## "COSMOCORD"

### CRYSTAL PICK-UP

FOR CLARITY AND TONE


LICENSED BY BRUSH CRYSTAL CO., LTD., under Brit. Pat. Nos. 366,252 and 454,595

**Retail Price 27/6 Plus Tax**

Trade only supplied.

SOLE SELLING AGENTS

**SALE, TILNEY & Co., Ltd.,**  
3, LLOYD'S AVENUE, LONDON, E.C.3

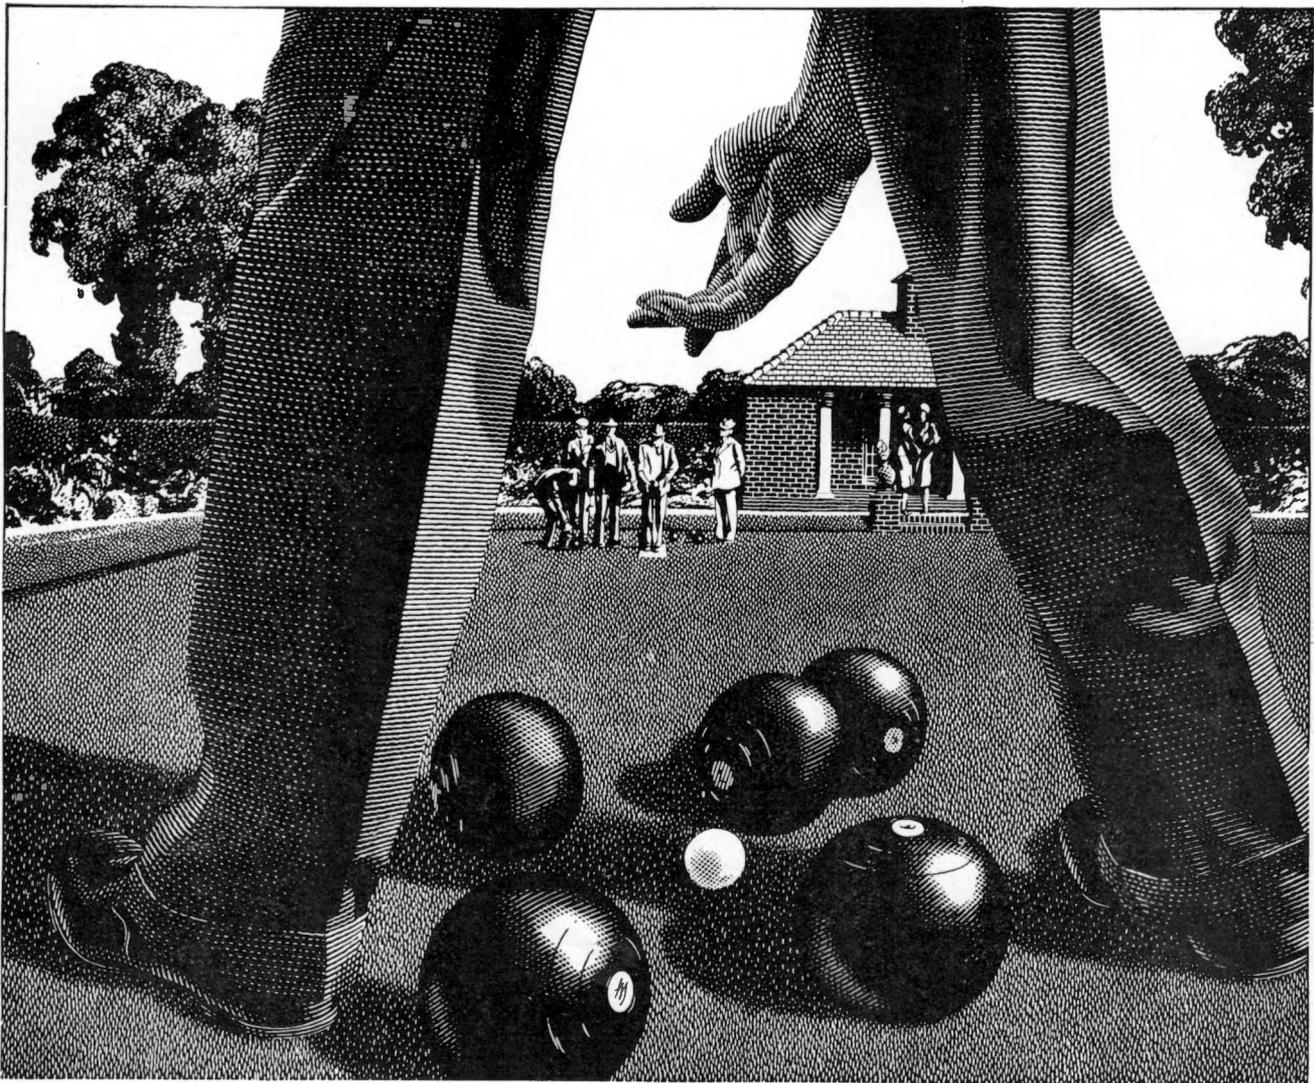

## *The Set Objective*

A hand beckons . . . the 'wood' describes a graceful arc and comes slowly to rest. With Mullard, too, the beckoning hand of world events shapes a course for progress to follow. And Mullard technical skill is

guided and directed towards that end. The new developments in electronic technique taking place in Mullard laboratories and factories today will determine the trend of manufacturing policy for years to come.

# **MULLARD**

## **THE MASTER VALVE**

TRANSMITTING AND RECEIVING VALVES FOR COMMUNICATIONS · BROADCASTING  
TELEVISION · SOUND AMPLIFICATION · ELECTRO - MEDICAL EQUIPMENT · INDUSTRIAL EQUIPMENT

THE MULLARD WIRELESS SERVICE CO. LTD., CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C.2

Frequency Modulation (Continued from page 585)

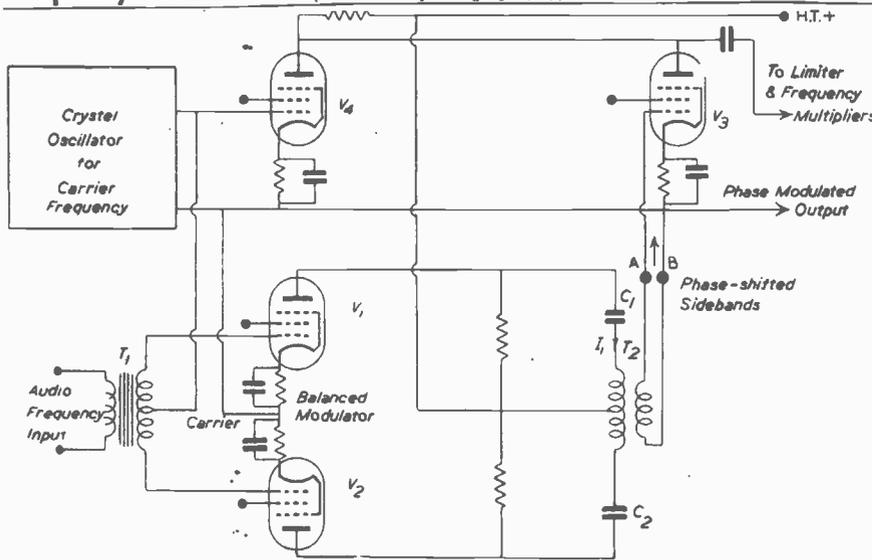


Fig. 5. Circuit diagram showing production of phase modulation.

“central” component is applied to another hexode  $V_3$  (acting as a frequency changer) together with the output from a very stable crystal oscillator (multiplied up if necessary). The difference frequency is passed to a discriminator, in this case two circuits tuned about 2 kc/s above and below the difference frequency and two detectors giving opposing D.C. voltages which provide bias for  $V_3$  through the grid leak  $R_1$ . When the original carrier frequency is correct, the difference frequency is exactly centred between the two discriminator circuits and there is no D.C. voltage across  $XX$ . If the carrier frequency component wanders, a voltage, positive or negative, is produced and automatically adjusts the D.C. bias on the reactance valve to correct for this. The carrier frequency component has then practically the same stability as the crystal oscillator.

Phase modulation can be achieved by separating the two sidebands of an amplitude modulated carrier from the carrier and passing them through a phase adjusting network which places their resultant at  $90^\circ$  to the carrier vector as shown in Fig. 4. This method does not completely suppress amplitude modulation (a limiter can be incorporated to remove amplitude modulation) and the phase change is not exactly proportional to the modulating voltage amplitude, but if its maximum value is limited to about  $\pm 25^\circ$  distortion of the modulation does not exceed 5%<sup>3</sup>. Now if 30 c.p.s. modulation is to produce a carrier frequency deviation of +75 kc/s at 40 Mc/s, a phase change of

$$143,200^\circ \left[ \frac{75,000 \times 360}{30 \times 2\pi} \right]$$

is required, so that the phase change of  $25^\circ$  must be multiplied 5,720 times, i.e., the original carrier frequency must be  $40/5,720 = 7$  kc/s. Actually it is rarely necessary to cater for full modu-

lation at 30 c.p.s. and a more normal carrier frequency would be 70 kc/s followed by frequency multiplier stages stepping up to 40 Mc/s. A circuit showing this type of phase modulator is given in Fig. 5. The carrier frequency, obtained from a crystal controlled master oscillator is fed to two channels, one which amplifies and one which modulates, suppresses the carrier and phase changes by  $90^\circ$  the sideband resultant with respect to the original carrier. The modulator is of the balanced push-pull type; the carrier-frequency, being connected in the common grid lead, produces cancelling voltages in the anode and is suppressed. The sideband frequencies obtained by interaction between the carrier voltage and the audio voltages applied through the centre tapped transformer  $T_1$ , add at the output circuit, the primary of the centre tapped transformer  $T_2$ . The inductive reactance of the latter is cancelled by condensers  $C_1$  and  $C_2$ , so that the output circuit acts as a resistance and the sideband current  $I_1$  in the primary is in phase with the carrier grid input. The required  $90^\circ$  (or  $270^\circ$ ) phase shift of the sidebands is, however, realised at the secondary because the voltage across  $AB$  is  $90^\circ$  (or  $270^\circ$ ) out of phase with respect to the current  $I_1$ .




Fig. 4.

The sideband voltage is amplified in  $V_3$  and mixed with the original carrier frequency in the anode of  $V_4$ , after which the resultant phase modulated wave is amplified and passed through frequency multipliers bringing the carrier up to its required ultra high frequency value.

BIBLIOGRAPHY.

- 1 "Amplitude, Phase and Frequency Modulation," H. R. Roder, Discussion, *Proc. I.R.E.*, May, 1932, p. 887.
- 2 "A Method of Reducing Disturbances in Radio Signalling by a System of Frequency Modulation," E. H. Armstrong, *Proc. I.R.E.*, May, 1936, p. 689.
- 3 "Armstrong's Frequency Modulator," D. L. Jaffe, *Proc. I.R.E.*, April, 1938, p. 475.
- 4 "Reactance Tube Frequency Modulators," M. G. Crosby, *R.C.A. Review*, July, 1940, p. 89.
- 5 "A New Broadcast Transmitter Circuit Design for Frequency Modulation," J. F. Morrison, *Proc. I.R.E.*, October, 1940, p. 444.

Television Picture Storage

(Continued from page 580)

mobilised images are successively focused. Finally, the photo-electric screen on to which the wave images are projected, could be used in the form of a photo-electric control grid to control electron beams issued by a thermionic surface and passing through this grid.

Using these latter means it will be possible to obtain a considerably higher light output from the fluorescent screen and/or to use a considerably smaller light flux as well as illumination on the photo-electric screen.

The system just described in principle is equivalent to a multi-beam cathode-ray tube of several hundred independent scanning beams. At any moment an area of the picture screen representing a considerable part of the picture line is struck by a fan-shaped beam of the exciting electrons. The total beam current, instead of being concentrated in a spot of element size, is distributed over this oblong area of several hundred elements, which is swept over the picture screen, exciting each element for a time period of the order of the line scanning period without any compromise to sacrifice definition. Consequently, even with much higher beam currents than feasible in single-spot cathode-ray tubes, it is possible to remain safely below the screen saturation. This will result not only in an increased life of the screen and in a fully defined picture the brightness of which, as quantitatively outlined above, will be considerably increased, but also improve the tone gradation in the high-lights since the image screen is no longer saturated.

BIBLIOGRAPHY.

- 1 A. H. Rosenthal, *Proc. I.R.E.*, May, 1940, *Electronics and Television*, February and March, 1940, pp. 52, 117.
- 2 A. H. Rosenthal, *Electronics*, October, 1941, p. 41.
- 3 D. M. Robinson, *Proc. I.R.E.*, Aug., 1939.
- 4 DuMont Proposals, *Electronics*, February, 1940, p. 22.
- 5 *Television*, R.C.A. Institutes Technical Press, October, 1937.
- 6 E. Bruche, O. Scherzer, *Geometrische Elektronen Optik*, pp. 130, 199, Berlin, 1934.



**"Everything  
O.K. Sir!"**



**Made in Three  
Principal Materials**

**FREQUELEX**—An Insulating material of Low Dielectric Loss. For Coil formers, Aerial Insulators, Valve Holders, etc.

**PERMALEX**—A High Permittivity Material. For the construction of Condensers of the smallest possible dimensions.

**TEMPALEX**—A Condenser material of medium permittivity. For the construction of Condensers having a constant capacity at all temperatures.

**DIELECTRIC** Loss problems in High Frequency circuits have been solved by the use of Bullers Radio-Frequency Ceramics.


Many years of research and development in our Laboratories have brought these materials to a high degree of efficiency.

They are in constant use for transmission and reception and play an important part in maintaining communication under all conditions.

# Bullers

## LOW LOSS CERAMICS

BULLERS, LTD. THE HALL, OATLANDS DRIVE, WEYBRIDGE, SURREY  
Telephone: Walton-on-Thames 2451. Manchester Office: 196 Deansgate, Manchester

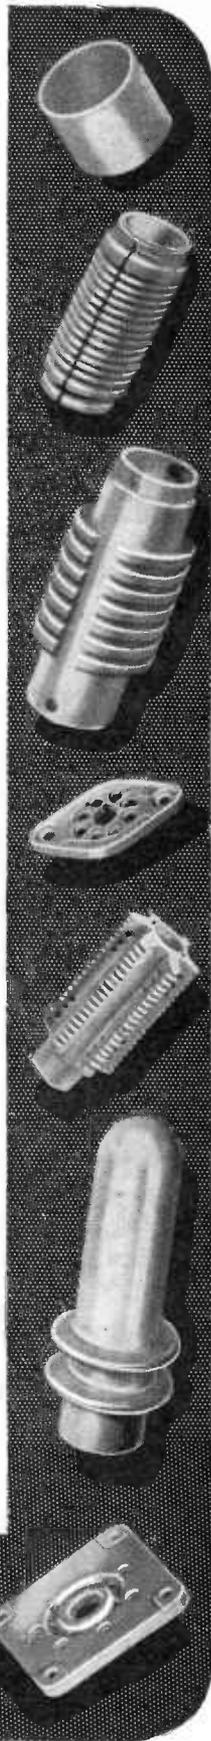

# RADIO BOOKS

## CATHODE RAY TUBES

By Manfred Von Ardenne. In this book a very wide field is covered and the book deals with fundamental principles and early developments as well as with present day methods and apparatus. It describes the theory and construction of the cathode-ray tube; and deals with the principal accessories, including the mains equipment, the pre-amplifier for increasing the sensitivity, the time deflection apparatus and photographic recording equipment. 42s. net.

## CATHODE RAY OSCILLOGRAPHS


By J. H. Reyner, B.Sc. (Hons.), A.C.G.I., etc. Here is an easily understood guide to the practical application of Cathode Ray Tubes to numerous purposes, including the examination of oscillations or wave-forms. Radio men, and particularly those about to enter the services, will find this book a genuine and invaluable guide. 8s. 6d. net.

## SHORT WAVE RADIO

By J. H. Reyner, B.Sc., A.C.G.I., etc. This book gives an account of the tremendous progress which has been made in the field of short-wave radio telegraphy during the last few years, and shows how many of the problems formerly regarded as insuperable have been overcome. Second edition. 10s. 6d. net.

ST., KINGSWAY, W.G.2

from **PITMAN'S** PARKER

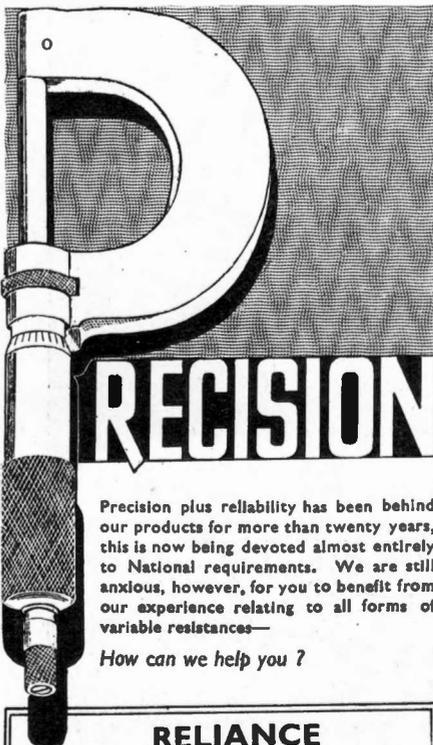

**PRECISION**

Precision plus reliability has been behind our products for more than twenty years, this is now being devoted almost entirely to National requirements. We are still anxious, however, for you to benefit from our experience relating to all forms of variable resistances—

How can we help you ?

## RELIANCE


Manufacturing Co. (Southwark) Ltd.  
Sunderland Road, Higham Hill,  
Walthamstow. E. 17.

Telephone—Larkwood 3245

# ABSTRACTS OF ELECTRONIC LITERATURE

## Measurement

### Measurement of Dielectric Pre-Breakdown Current (Race)

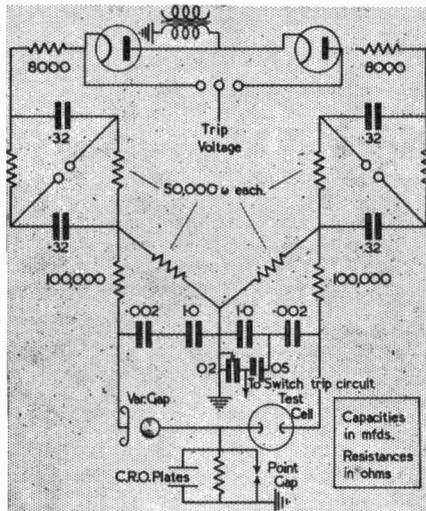

The relatively long-time constants of even highly sensitive indicating instruments make the latter unsuitable for measuring current surges of the order of milli-seconds. The author describes the adaptation of the cathode-ray tube to indicate current changes just preceding breakdown of heptane and various oils. The apparatus, which is capable of applying 200 micro-second impulse voltage waves with gradually increasing unidirectional voltages to the specimens, is described, and results of such tests tabulated.

—*El. Engg.*, August, 1941, page 855.\*

### The Equivalent Characteristics of Valves Operating in Feedback Circuits (J. H. Pratt)

A graphical method of determining the effects of feedback upon the characteristics of a valve amplifier is described, depending upon the fact that the characteristics of valves may be considered to be changed by feedback.

The method of obtaining valve characteristics with feedback from the normal characteristics is described, and a number of examples of "feedback characteristics" for various percentages of positive and negative feedback of both the voltage and current type are illustrated.

—*R.C.A. Review*, Vol. VI, No. 1, July, 1941, page 102.

## Circuits

### 4-Valve Band-Switching Receiver for A.C. Mains (S. K. Lewer)

A receiver is described in which the novel features incorporated are—selector switches in tandem and a

ganged condenser with both large and small sections.

The receiver gives complete coverage from 100 kc/s to 26 Mc/s has a directly calibrated dial. A full circuit diagram is given together with a complete list of components.


—*T. and R. Bulletin*, Vol. 17, No. 5, November, 1941, page 160.

## Electro-Medical

### Three-phase Electrocardiograph Mixing Circuit (W. H. Jordan)

An electrical mixing circuit which permits the use of an ordinary cathode-ray tube having two sets of deflecting plates was suggested by the circuits used to change three-phase A.C. to two-phase A.C., and was tested by applying three-phase A.C. to the grids and observing a circular pattern on the screen of the cathode-ray tube. The resistance network was tapped at two places and connected to the vertical and horizontal deflecting plates. The position of the taps was chosen as shown in order to obtain the correct phase and amplitude relationships, i.e., when three-phase A.C. is applied to the grids, two-phase A.C. will be obtained on the deflecting plates. Pentode type valves were used to increase the gain.

High gain amplifiers similar to those described by Hollman and Mann were used in the input circuit and were Y-connected to the conventional three-body leads. The output of the three amplifiers is connected to the three grids of the mixing circuit as shown in the diagram.

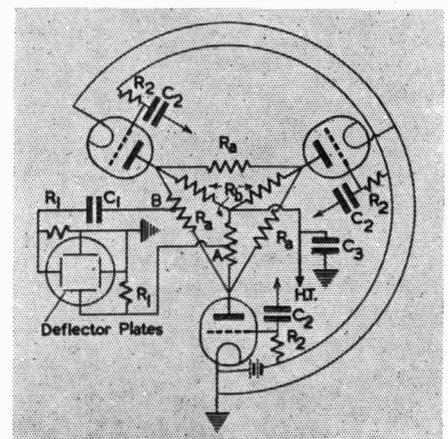


R1 and R2 1 meg.  
R3 and R4 50,000 ohms.  
C1 and C2 2μFd.  
C3 8μFd.  
Tappings (A) 0.58 Rb. (B) 0.33 Ra.

—*Rev. Sci. Inst.*, Vol 12, No. 9, September, 1941, page 449.

\* Supplied by the courtesy of Metropolitan-Vickers Elec. Co., Ltd., Trafford Park, Manchester.

# FREQUENCY BRIDGE TYPE D - 101 - A

*A Bridge for the measurement of audio frequencies—simple to operate - direct reading - outstandingly accurate—reasonably priced.*

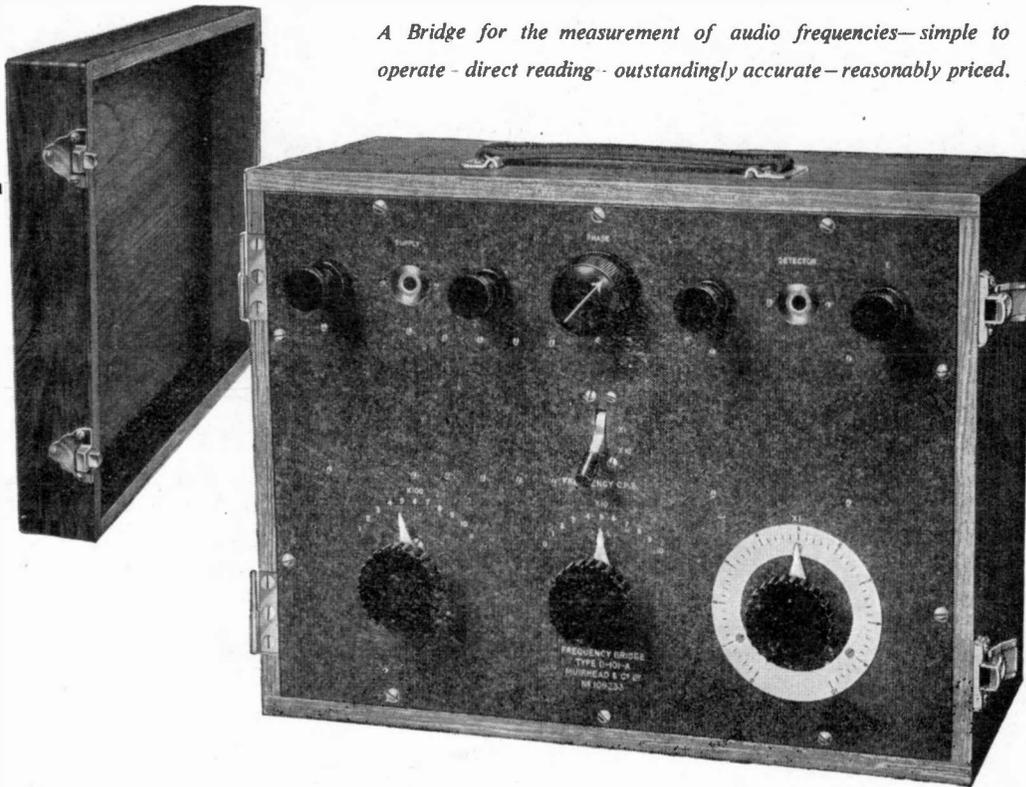


A complete description of this Bridge is given in Bulletin B-526-A, which will be sent on request.

- ★ Frequency range, 100 c.p.s. to 12,100 c.p.s.
- ★ Direct reading on two decade dials and a third continuously variable dial.
- ★ Measuring accuracy  $\pm 0.25\% \pm 1$  c.p.s.
- ★ Reading accuracy—better than 0.05% over the whole range.
- ★ Accuracy unaffected by stray magnetic fields.
- ★ Input impedance 400-1,500 ohms unbalanced.
- ★ Telephones form a suitable detector for most measurements.
- ★ Light and easily portable.

MUIRHEAD & CO. LTD., ELMERS END, BECKENHAM, KENT.  
TELEPHONE: BECKENHAM 0041-2

## MUIRHEAD


FOR OVER 60 YEARS DESIGNERS AND MAKERS OF PRECISION INSTRUMENTS

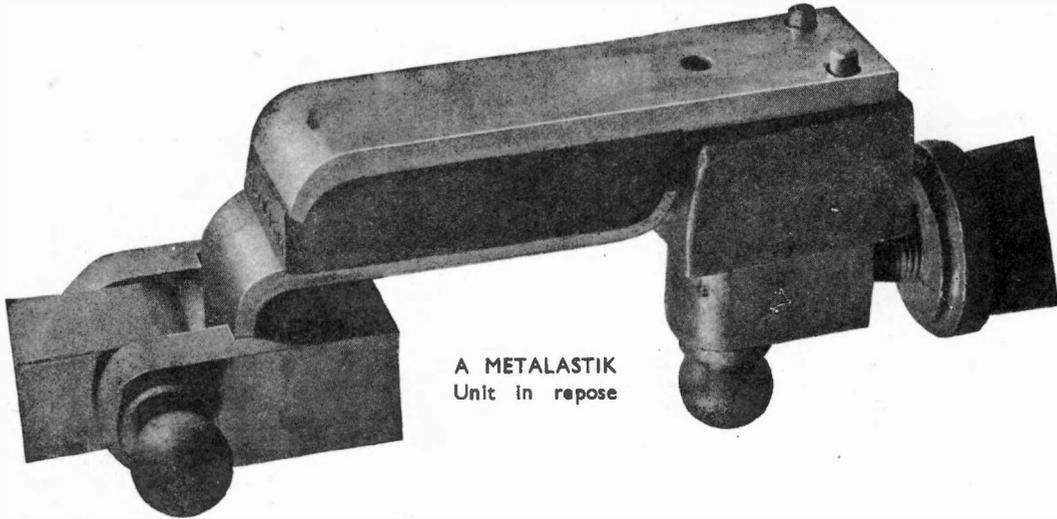

A METALASTIK  
Unit in repose

## A TYPICAL METALASTIK ANTI-VIBRATION MOUNTING

The Metalastik process of bonding to metal leaves the rubber in this mounting entirely free and unrestricted. There is no metallic connection between the mounting plates, nothing through which vibration can be transmitted. The immense strength of the rubber-to-metal fusion is illustrated below. The life of your machinery, the accuracy of your work and the health of your workers demand the incorporation of Metalastik Units.

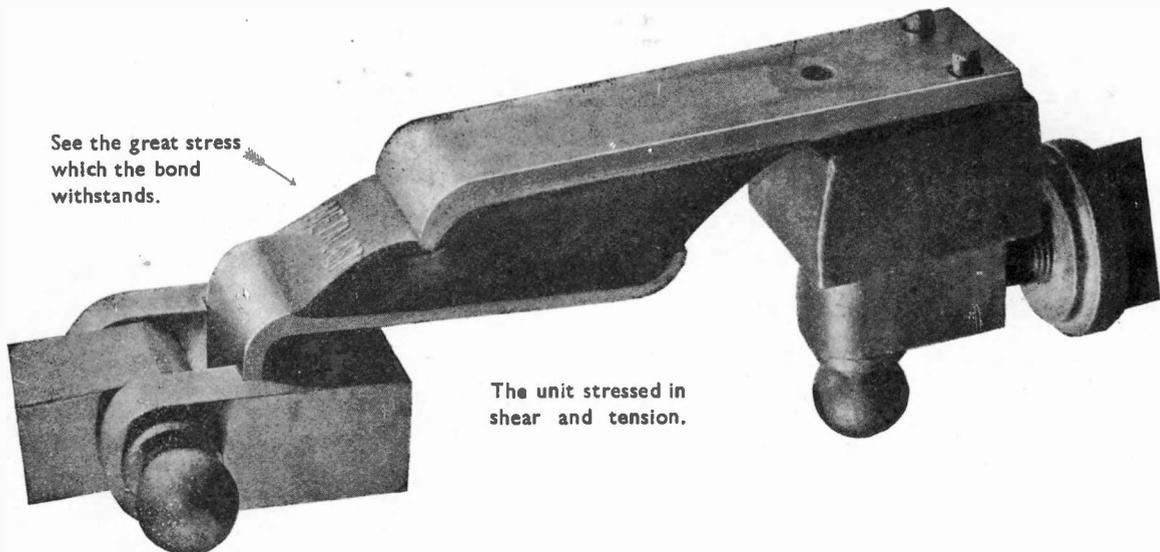


See the great stress  
which the bond  
withstands.

The unit stressed in  
shear and tension.

# METALASTIK

ANTI-VIBRATION UNITS

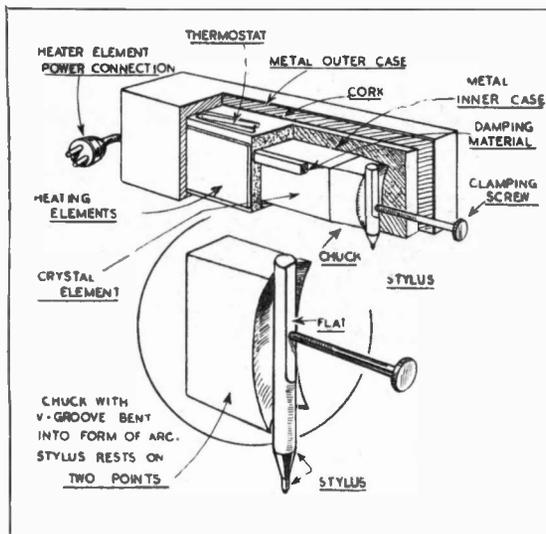

## A New Temperature-controlled Crystal Cutting Head

by  
**D. W. ALDOUS**

An investigation into the effects of temperature changes upon the various elements in the disk recording process, with special reference to the effects of temperature on electromagnetic and crystal cutting devices, was undertaken some time ago by the technical staff of The Brush Development Co., Cleveland, Ohio, U.S.A., directed by Dr. S. J. Begun.

It was found that the number of factors affecting cutting-head performance could be considerably reduced by maintaining the temperature of the cutting-head constant. This will stabilise the characteristic of all the variables inside the head, and leave the external resistance component as the only variable, representing the variations due to depth of groove-cut and differences in record material. If this remaining variable resistance component, for the frequency range considered, is small compared with any of the other three components, it can have little control upon the overall characteristic of the cutting-head.

As devices utilising Rochelle salt crystals are the special interest of The Brush Development Company, the investigations were continued with the object of producing a crystal cutting-head possessing temperature stability. The practical outcome of these experiments was a design of crystal cutting-head with the desirable feature of temperature stability obtained by means of a built-in heating element with thermostat control. (See Fig.)

This temperature-controlled cutting-head consists of a four-ply crystal element mounted in a metal casing on "koroseal" pads. The "koroseal" pads are the damping and not only provide a stiff mounting support but, because of their damping characteristic, practically eliminate the natural frequency peak of the cutting-head. The stylus chuck, which has a V-groove bent into the form of an arc thus allowing the stylus to rest on two points, is connected to one end of the crystal element. The stylus is pressed against the V-

groove by a set-screw mounted in the head casing. The axis of the set-screw is located on the neutral axis of the torsional motion of the crystal element. Two heating pads are fitted close to the head housing sidewalls, controlled by a thermostat which rests upon and has good metallic connection to the cutting-head housing. The heater coils are designed for operation from the usual power supply. The complete unit is enclosed in another heat-insulated metal shielding to ensure that any draught or air motion in the recording room will not affect the temperature stabilisation of the crystal inside the housing.

After connecting the heater coils to the power supply the temperature of the cutting-head will rise and usually above the limit set for the thermostat. A definite time is required for heat equalisation, due to heat conduction, thus causing this temperature overshooting, but soon the thermostat operates and within 10 to 12 minutes the cutting-head arrives at the proper temperature. The crystal element itself introduces a small amount of distortion which changes with temperature, but this distortion is small at and above 35 deg. C. and accordingly a temperature of that value has been adopted for stabilisation purposes. No hum problems have been encountered, as electro-magnetic induction cannot take place in a crystal unit and, where electro-static influences are concerned, the cutting-head is completely screened in its housing.

The capacity of the crystal until is 0.004  $\mu$ F. and to extend the range for constant-amplitude recording to 9,000 c/s the head should be fed from a 4,000 ohms impedance with 6 to 8 watts of output power. If a constant-velocity characteristic is desired for a turnover point of 500 c/s, the necessary output power from an amplifier may be as low as 2 to 3 watts. Portable equipment, for exterior recordings, fitted with this new cutting-head, can now operate with the same stability as studio equipment.



The dictionary of mythology contains no reference to this extraordinary animal which is perhaps understandable since he belongs to the world of technical jargon used by transformer designers.

Familiarity with these factors such as kilolines per sq. inch, leakage reactance, surface dissipation and so on contribute to the production of the sound and trouble-free designs for which Bryce transformers have a well merited reputation. Our years of experience have resulted in designs and manufacturing technique capable of giving continuous satisfaction. If you are requiring transformers or chokes up to 25 KVA you will find us at your service.

W ANDREW & COMPANY LTD




**BOREHAM WOOD**

HERTS.  
TELEPHONE • ELSTREE 1675

# U.I.C.

## Ceramic Coil Formers

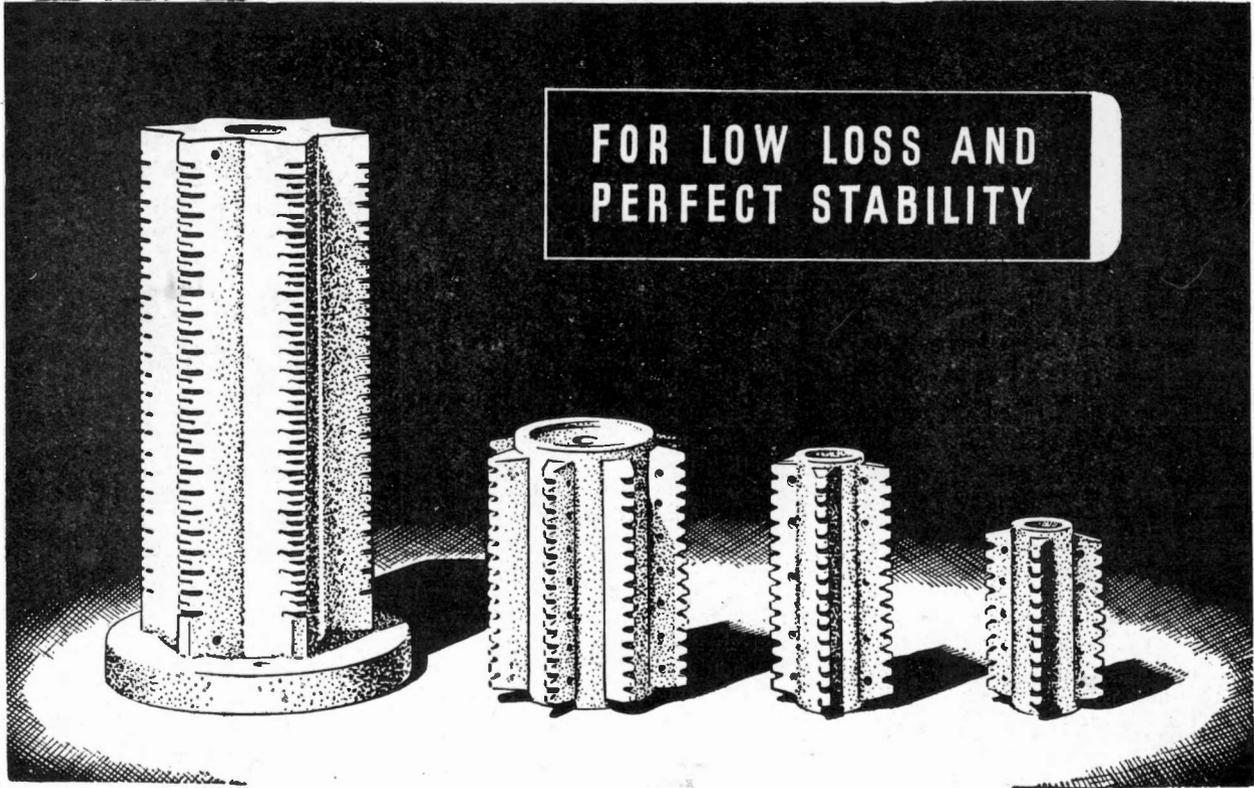

FOR LOW LOSS AND  
PERFECT STABILITY

THE PIONEERS OF LOW LOSS CERAMICS are still in the forefront in the development of radio-frequency ceramics.

U.I.C. Ceramic parts, coil formers, valve holders, trimmer bases, bushings, etc., offer the following advantages :

**Low dielectric loss.**

**Dimensional accuracy.**

**Complete stability.**

**Unaffected by temperature and humidity.**

*Full details and advice gladly given*

### UNITED INSULATOR CO. LTD.

12-20 LAYSTALL STREET, LONDON, E. C. 1.

'Phone : TERminus 7383.

Grams : CALANEL, SMITH, LONDON.

CONTRACTORS TO G.P.O. AND GOVERNMENT DEPARTMENTS. ON A.I.D. APPROVED LIST.

Please note new  
address and  
Telephone number

*The Pioneers of Low-Loss Ceramics*

Ode

# Partridge

No. 11

## DIG

We have heard about the Navy  
And the Mercantile Marine,  
Of the fight that goes on daily  
To outwit the submarine,  
So by growing lots of green stuff  
Fruit and root crops by the ton  
We can share with them the honours  
When at last the battle's won.

### CHORUS

(For full effect this should be sung to the tune of "Roll out the Barrel")

Roll up your shirt sleeves,  
Gardening is really good fun ;  
Flex up your muscles,  
There is much work to be done.  
Dig, dig allotments.  
Turn up the soil with a will,  
That's the way to help the sailors  
And our food bins fill.

# N. Partridge

B.Sc., A.M.I.E.E.

Makers of Chokes and Transformers  
King's Bldgs., Dean Stanley St.,  
LONDON S.W.1

Telephone : VICTORIA 5035

## A.C.S. RADIO

### Selected Offers !

- CINEGRAM PUBLIC ADDRESS portable outfit, A.C. or D.C., with amplifier, speaker, turntable, and pick-up. Rexine, with canvas cover. New ... £25 0 0
- GRAMPION Type B. Public Address portable amplifier with speaker, leads and P.A. Mike. A.C. and D.C. Dem. soiled ... £25 0 0
- MARCONI 536 AUTORADIOGRAM, broadcast bands, 7 valves, auto-changer. Good condition ... £21 10 0
- MARCONI 8 valve Autoradiogram, non-standard console, Garrard changer. Broadcast bands. Excellent order ... £30 0 0
- MARCONI 239 RADIOGRAM, broadcast bands, new condition... £22 10 0
- MARCONI Q286 Radiogram, 5 valve superhet, broadcast bands, fine condition ... £18 18 0
- AMERICAN General Electric Radioforte Console, 7 valves, 14 push buttons, Beamscope non-static aerial, 200/550 metres. Magnificent cabinet, shop soiled only, cost 68 gns. ... £27 10 0

We also offer high cash prices for good modern radio equipment and communication sets.

44 WIDMORE RD. BROMLEY, KENT  
Phone RAvensbourne 0156


### AT LAST!

You can convert your silent Cine projector for sound-films, 9.5m/m, 16m/m, 35m/m.

### "PRACTICAL SOUND CONVERSION for AMATEURS"

By F. G. BENSON, shows you how. First edition sold out in 24 days! ... fresh stocks now available. Send P.O. 5/6 to BENSON (Dept. EE) 88, Greenfield Avenue, Watford, Herts.

## COMMUNICATIONS DEPEND....

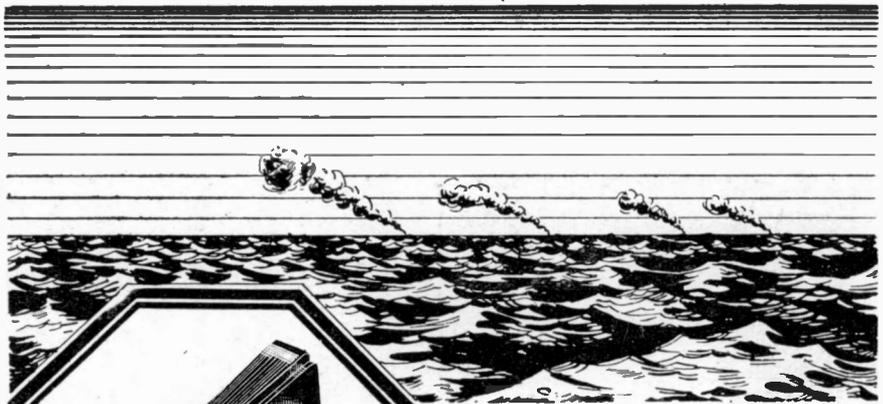

## ON SMALL PARTS....

*The Choice of Critics*

### BULGIN FOR KNOBS

*The largest and most extensive range in the World. Over fifty models from which to choose. All sizes and shapes, for different classes of work or operation. Nearly every type has brass-insert, steel grub-screws are fitted, well sunk. For 0.25" d. shafts and other sizes. Finely moulded and highly polished. The highest class instruments use Bulgin Knobs exclusively.*

In countless instances quite intricate pieces of apparatus are wholly dependent on the proved reputation and reliability of their component parts. All products from the House of Bulgin are pre-eminent for superior design and workmanship, and every article bearing our Trade Mark has to pass exacting and exhausting tests during the course of its production.

We ask the kind indulgence of the public on delivery until peaceful conditions return.

## ALWAYS DEPEND ON


# BULGIN

REGISTERED • TRADE • MARK

A. F. BULGIN & CO. LTD., BY-PASS RD., BARKING, ESSEX

Tel. Rippleway 3474 (4 lines)

# HIGH GRADE PLASTIC MOULDINGS

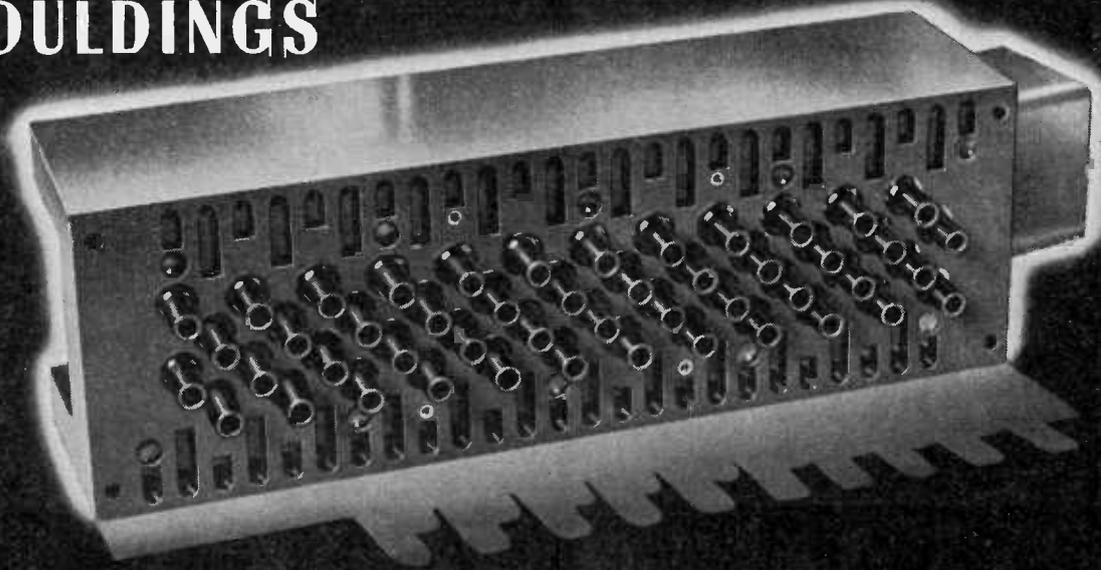


## KENT MOULDINGS

PROPRIETORS: KOLSTER-BRANDES LIMITED

FOOTSCRAY KENT  
TELEPHONE FOOTSCRAY 1195

### CONSTANT VOLTAGE

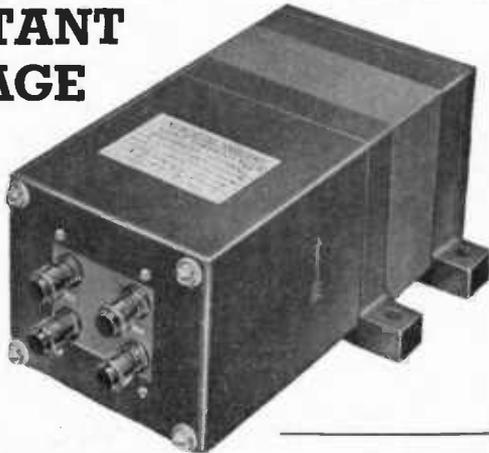

A NEW **ADVANCE** IN TRANSFORMER DESIGN  
Line voltage variations of  
 $\pm 15\%$  reduced to  $\pm 1\%$

Stabilize your Electrical Instruments by using an  
"ADVANCE" Constant Voltage Transformer

**TYPICAL SPECIFICATION:**

Input Voltage:	.. .. .	190-260 v. 50 c.
Output Voltage:	.. .. .	230 v. $\pm 1\%$ .
Max. load:	.. .. .	150 watts.
		Input power factor over 90%.

Write for details.

Price on application.

**ADVANCE COMPONENTS LTD.,**

Back Rd., Shernhall St., Walthamstow, London, E 17

Telephone: Larkwood 4366-7

# ROLA

## LOUD SPEAKERS

THE WORLD'S FINEST REPRODUCERS

## TRANSFORMER LAMINATIONS

Core Widths  $\frac{3}{16}$ " to  $1\frac{1}{2}$ " (E's and I's.)


EIGHT STOCK SIZES

A Comprehensive Bulletin together with details of Associated Covers  
and Clamps with design data will be sent to manufacturers on request.

**BRITISH ROLA LIMITED**

MINERVA ROAD · PARK ROYAL · N.W.10 · WILLESDEN 4322

## Links in the chain of Success





**C**OAXIAL PLUG and SOCKET the first mass-produced type for coaxial leads. Supplied to grip air-spaced or solid di-electric cables. For mounting on chassis or cover of conduit box. All metal parts silver plated, moulded bakelite cover. Socket in each case is complete with plug.

*Other Belling-Lee Activities*  
Fuses 60 m/a. up to 300 amps. Fuseholders, valveholders up to 12,000 volts. Terminals up to 100 amps. Plugs and sockets and couplings up to 10-way. Screened rooms and cabinets, anti-interference aerials, dipoles and speciality feeders.

**BELLING & LEE LTD**  
CAMBRIDGE ARTERIAL ROAD, ENFIELD, MIDDX

2837

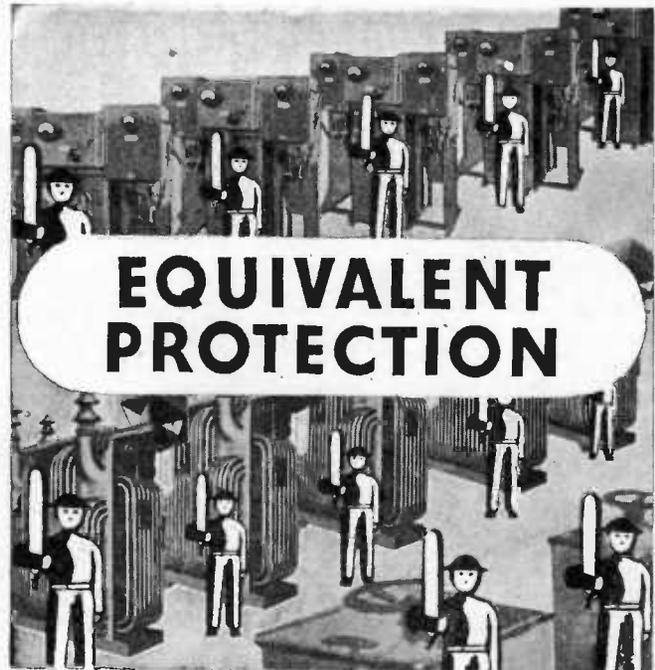

## EQUIVALENT PROTECTION

**1 MAN** guarding each danger spot  
**24 HOURS** per day . . . . .  
*does not give complete protection!*

Supposing you *could* obtain the necessary personnel to do this, *one* Methyl Bromide Installation would provide you with a far greater degree of protection at a fraction of the cost. There is literally nothing to compare with Methyl Bromide for the *immediate* extinction of FIRE. Because we are in a position to *know* this we invite you to let us prove, by facts and actual demonstration, that Methyl Bromide alone can solve your fire protection problem.

*The*


# NATIONAL

FIRE PROTECTION

COMPANY • LIMITED

Petersham Road, Richmond, Surrey  
Telephone - - - - - Richmond 2342-3-4 and 0406

## 15w. AC & 12-VOLT DC AMPLIFIER

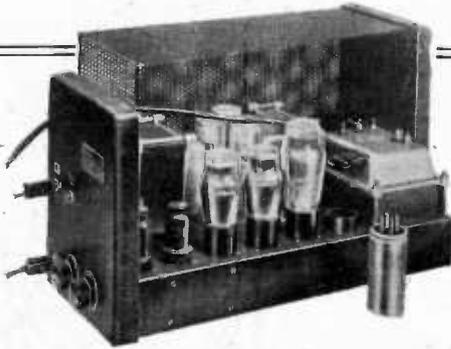


TYPE CP20

Prices: Plus 20% War Increase

AC and 12-volt CHASSIS with valves, etc. **£12 12 0**

AC only CHASSIS with valves, etc. **£8 18 6**

Gauze Case for either chassis 12/6 extra.

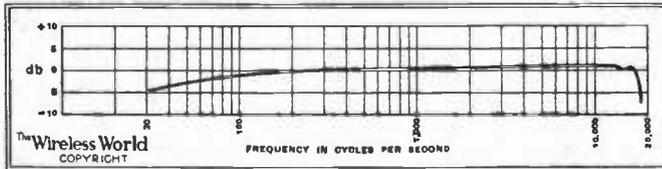

The Wireless World  
COPYRIGHT

Any response curve supplied to order  
Delivery on Priority A1 Contracts only

**T**HIS small Portable Amplifier operating either from AC mains or 12-volt battery, was tested by "THE WIRELESS WORLD," October 1st, 1937, and has proved so popular that at Customers' demand it remains unaltered except that the output has been increased to 17.2 watts and the battery consumption lowered to 6 amperes. Read what "The Wireless World" said,—


"During tests an output of 14.7 watts was obtained without any trace of distortion so that the rating of 15 watts is quite justified. The measured response shows an upper limit of 18,000 c/s and a lower of 30 c/s. Its performance is exceptionally good. Another outstanding feature is its exceptionally low hum level when AC operated even without an earth connection. In order to obtain the maximum undistorted output, an input to the microphone jack of 0.037 volt was required. The two independent volume controls enable one to adjust the gain of the amplifier for the same power output from both sources, as well as superimpose one on the other, or fade out one and bring the other up to full volume. The secondary of the output transformer is tapped for loud speakers or line impedances of 4, 7.5 and 15 ohms."

## VORTEXION LTD.

257, The Broadway, Wimbledon, S.W.19

'Phone: LIberty 2814

### THE "FLUXITE QUINS" AT WORK

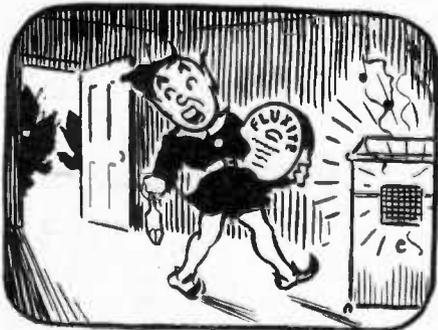

"We're not coming in, that's a cert".  
Yelled EE "Why there goes the alert".  
Said OI "Now don't fret It's a wailing old set  
Just needs FLUXITE—I'll wager my shirt".

See that FLUXITE is always by you—in the house—garage—workshop—wherever speedy soldering is needed. Used for 30 years in government works and by leading engineers and manufacturers. Of Ironmongers—in tins, 4d., 8d., 1/4 and 2/8. Ask to see the FLUXITE SMALL-SPACE SOLDERING SET—compact but substantial—complete with full instructions, 7/6. Write for Free Book on the art of "soft" soldering and ask for Leaflet on CASE-HARDENING STEEL and TEMPERING TOOLS with FLUXITE.

To CYCLISTS! Your wheels will NOT keep round and true unless the spokes are tied with fine wire at the crossings and SOLDERED. This makes a much stronger wheel. It's simple—with FLUXITE—but IMPORTANT.

THE FLUXITE GUN puts FLUXITE where you want it by a simple pressure. Price 1/6, or filled 2/6.

FLUXITE LTD. (DEPT. T.V.M.)  
BERMONDSEY ST., S.E.1.

ALL MECHANICS WILL HAVE

# FLUXITE

IT SIMPLIFIES ALL SOLDERING

### THE DIAGRAMS IN THIS JOURNAL ARE LETTERED WITH

"UNO"




FOR LEGIBILITY & NEATNESS

A. WEST & PARTNERS, LTD.

36, Broadway,  
WESTMINSTER

# TRANSFORMERS

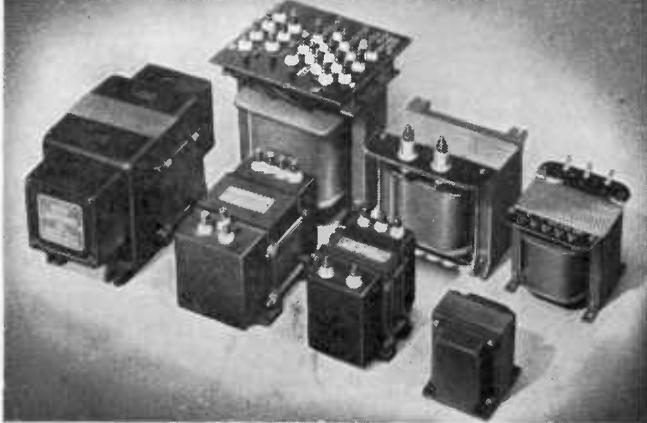


of every type for every purpose

Woden supply all types of transformers including stripped, fully shrouded, and special types built to specification. Special impregnating and dehydrating processes safeguard reliability. Punctual delivery ensured on priority work.

**WODEN** TRANSFORMER CO.  
 Thornley St., Wolverhampton  
 Tel.: Wolverhampton 22829.  
 MAKERS OF TRANSFORMERS, POWER PACKS, AND  
 SPECIAL RECEIVING AND TRANSMITTING APPARATUS.

# F E R R I S

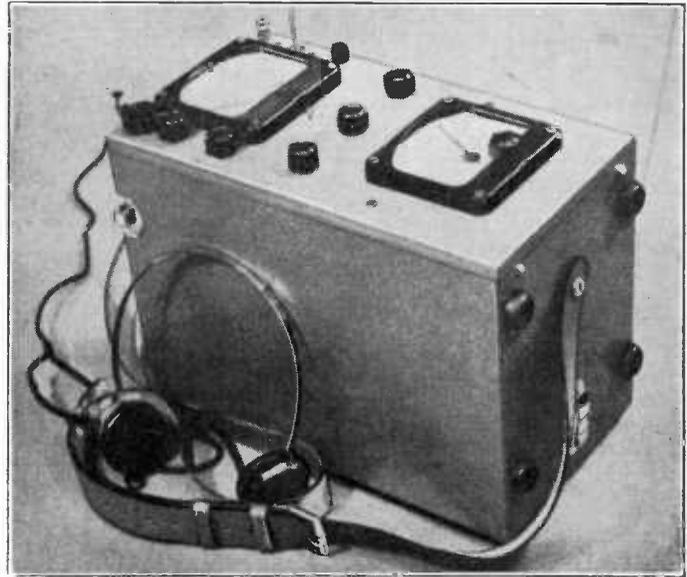

This instrument and others from the ranges of CLOUGH-BREngle BOONTON AND BALLANTINE are available from London stock. Technical information on request.

## MODEL 32 A RADIO NOISE AND FIELD STRENGTH METER

The first compact portable accurate radio frequency microvolt meter. The scale, which is very nearly logarithmic, is calibrated to be direct reading in terms of microvolts. Covers in three decades 1 to 100,000 microvolts. This range can be extended by factors of 10 or 100 by means of multiplier networks. Frequency Range 150 to 350, and 550 to 20,000 kilocycles. Field Intensity Range 2 to 200,000 microvolts per meter.

## LELAND INSTRUMENTS LTD.

45, Mecklenburgh Square, LONDON, W.C.1. Telephone: Terminus 5689

# TUCKER EYELETS FOR RADIO

GEO. TUCKER EYELET CO. LTD. • WALSALL ROAD, BIRMINGHAM, 22 • Phone: BIRchfields 5024

# GALPINS

## ELECTRICAL STORES

21 WILLIAM ST., SLOUGH, Bucks.

Phone: SLOUGH 20855 TERMS: Cash with Order

**ELECTRIC LIGHT CHECK METERS**, small, late type, well-known makers, first-class condition, electrically guaranteed, for A.C. Mains 200/250 volts 50 cy. 1 phase 5 amp. load, 10/- each; 10 amp. load, 12/6, post 1/-.

**D.C. ELECTRIC LIGHT CHECK METERS**, 200/250 volts, 5 and 10 amps., in new condition and electrically perfect; 7/6, post 1/-.

**AUTO. CHARGING CUT-OUT AND VOLTAGE REGULATOR**, ex-R.A.F., suit any dynamo up to 20v. at 15 amps., fully adjustable, with wiring instructions, complete in metal case, 3/8, post 9d.

**MOTOR-DRIVEN ALTERNATOR**, direct coupled, motor, 110 or 220 v. D.C. input, complete with starter; alternator output 220 volts, 50 cycle, single phase, 176 watts, fitted governor; mounted on teak beams and fitted handles for carrying, condition as new, wear nil, size overall 40in. by 9in. by 11in. Price £16, carriage forward.

**DYNAMO**, 110 volts, 60 amps., shunt wound, interpole, ball bearing, speed 1,750 r.p.m. continuous rating. Price £15, carriage forward.

**110 V. BULBS**, 150 C.P., Ediswan screw fitting, half watt gas-filled, 2/6 each, post free, or 22/6 per doz., post free.

**FRACTIONAL H.P. D.C. MOTORS**, for 110 volt and 220 volt D.C. mains, only from 1/20th to 1/2 h.p., state size and voltage required, price 10/- each, carriage 1/-.

**HIGH TENSION TRANSFORMER**, input 100/220 volts output 45,000 volts at 7 milliamps, small portable type. Price: £12 10 0, carriage forward.

**X-RAY TRANSFORMER**, input 110/220 volts; output, 90,000 volts at 60 milliamps, late modern type, complete with high tension cables. Price £25, carriage forward.

**MOVING COIL METER** movements, 4 inch deflection at 10 milliamps, uncalibrated. Price 15/-, post 1/-.

**AUTO TRANSFORMER**, tapped 0—110—200—220—240 volts, 1,500 watts. £5.

**LARGE TRANSFORMERS**, Ex. Tungar rectifiers, output 10 to 70 Volts, sound windings, size 1 kW. 45/- 2 kW. £3/15/0, carriage forward.

**D.C. MOTORS**, laminated fields, approx. 1/2 h.p., 110 and 220 volt. Price 20/-, carriage 2/-.

**MILLIAMPMETER**, moving coil, centre zero, 3 range 5—0—5, 50—0—50 and 500—0—500, 4 in scale. Price £5.

**MAINS TRANSFORMER**, 200/240 volts input; output 110 volts at 5 amps. Price 17/6, post free.

**HIGH-FREQUENCY TRANSFORMERS**, 100 v. A.C. input; output 5,000 volts, 500 watts, 500 cycles. 50/- each, carriage forward.

**EX G.P.O. MORSE INKER AND TAPE RECORDER**, complete with actuating relay and tape reel, mounted on mahogany base, clockwork model, in good clean condition and perfect working order. Price £15, carriage paid.

**CAR DYNAMOS**, small round type, output 6 volts at 10 amps., in perfect working order. Price 17/6, carr. paid.

**SHEET EBONITE**, size 12in. by 11in. by 1/32in., best quality. Price 4/- per doz., post free.

**LARGE TRANSFORMERS** for rewinding, rating unknown, size 1 kW. auto. Price 17/6, carriage paid.

**LARGE TRANSFORMERS** for rewinding, size 2 kW. auto., rating unknown. Price 30/-, carriage forward.

**WOUND RESISTANCES**, mounted on enamelled iron, overall size 12in. by 1 1/2in., resistance 6 ohms, wound with 18 gauge chrome nickel wire, new and unused. Price 2/6 each, post free, or 25/- per doz.

**HIGH-VOLTAGE CONDENSERS**, size 4in. by 4in. by 10in. 1 mf. 4,000 v. working. Price 15/-, carriage paid.

**LARGE A.C. MOTOR** for rewinding, size 2 to 3 h.p., induction type, in good mechanical condition, bring oiler bearings. Price 50/-, carriage forward.

**LARGE HOT-AIR ENGINE**, 5 1/2in. dia. piston, in good mechanical condition. Price £4, carriage forward.

Cell  
Power

## Transformers Ltd.

It would be difficult to enumerate the various types of winding and components which we produce.

Sufficient to say—We specialise in the manufacture of Mains Transformers and Chokes of every type and size. Supplied in quantities or singly; We are willing also, to co-operate in the production of any proposition put to us, within our scope, to execute, with care and promptitude.

Write us for particulars:

8a Gladstone Road, Wimbledon, S.W.19

Phone: LIBerty 3303

# TRIX

## QUALITY SOUND EQUIPMENT

Designed and built for reliability and high quality sound amplification



Let us send you full details

Amplifiers  
4-400 Watts  
Horns  
Microphones  
Loudspeakers

Equipment available for priority work, factories, etc.



The TRIX Electrical Co., Ltd.  
65 BOLSOVER STREET, LONDON, W.1

Phone: EUSton 5471/2 Grams: Trixradio, Wesdo London

## Classified Announcements

### SCALE OF CHARGES

The charge for miscellaneous advertisements on this page is 12 words or less 2/-, and 2d. for every additional word. Single-column inch rate displayed, 12/6. All advertisements must be accompanied by remittance. Cheques and Postal Orders should be made payable to Hulton Press, Ltd., and crossed, and should reach this office, 43, Shoe Lane, London, E.C.4, not later than the 15th of the month previous to date of issue.

### LOUDSPEAKERS

3,000 SPEAKERS P.M. and energised 4" to 1 1/2" including several Epoch 18". Sinclair Speakers, Pultney Terrace, Copenhagen Street, N.1.

### MISCELLANEOUS

ALL TYPES of Rotary Converters, electric motors, battery chargers, petrol electric generator sets, etc., in stock, new and second-hand.

A.C.-D.C. Conversion Units for Operating D.C. Receivers from A.C. Mains, 100 watts output, £s. 10 150 watts output, £s. 10.

WARD, 37, White Post Lane, Hackney Wick, E.9.

LOUDSPEAKER repairs, British, American, any make, 24-hour service; moderate prices.—Sinclair Speakers, Pultney Terrace, Copenhagen Street, N.1.

### SOUTHERN RADIO'S Wireless Bargains:—

7/6 Assorted Components contained in attractive permanent box. 9 Assorted Valve Holders; 2 Volume Controls; 12 Assorted Condensers; 6 Resistances; Choke; Wire; Plugs; Circuits, etc.; 7/6, postage 7d.

ORMOND Loud Speaker Units, Balanced Armature Types. Small Bakelite, 3/6; Unshrouded, 2/6; Largest, 4-pole type, 6/6.

ACE P.O. Microphones, ready for use on any receiver, 6/6. Westectors W2, 2/6; TELSEN Radio Magazines, complete with 4 Circuits, 9d., post free. Wireless Crystals, 6d. each, 5/- per dozen. Permanent Magnet Speakers, 8", complete with multi-ratio transformer, 20/-. Many other bargains for callers. All goods guaranteed. Please add extra for postage.

SOUTHERN RADIO SUPPLY CO., 46, Lisle Street, London, W.C. Gerrard 6633.

### MORSE EQUIPMENT

FULL range of Transmitting Keys, practice sets and other equipment for Morse training.—Webb's Radio, 14, Soho Street, London, W.1. Phone: GERard 2089.

### RADIO MAP AND GLOBE

WEBB'S Radio Map of the World enables you to locate any station heard. Size 40" by 30" a colour heavy Art Paper, 4/6d., post 6d. Limited supply on Linen, 10/6, post 6d. WEBB'S Radio Globe—superb 12" full-colour model. Radio prefixes, zones, etc. Heavy oxidised mount. Post Paid. 27/6.—Webb's Radio, 14, Soho Street, London, W.1. Phone: Gerrard 2089.

### TUITION

PRACTICAL Radio Postal Courses, coaching for I.P.R.E., R.A.F. Location, and A.I.D. exams.; booklet free.—Secretary, I.P.R.E., Bush House, Walton Avenue, Henley-on-Thames.

FREE. "Book of Facts," tells you all about The Candler System of Code training. Courses for Beginners and Operators.—Write: Candler System Co. (35B) 121, Kingsway, London, W.C.2.

### WANTED

ALL TYPES of used Radio Sets, Radio and Electrical accessories. Bought for cash. University Radio, 22 Lisle Street, W.C.2. Phone: GER. 4447.

ALL TYPES of Test equipment required urgently for work of national importance. Signal Generators, Oscilloscopes, Frequency Standards, Meters, etc. Must be in good condition. Write full particulars and prices. Box E. E. Lovell & Curtis, 30, Bouverie St., E.C.4.

HARTLEY TURNER RF41 FEEDER UNIT. Valves optional. Details, price to—Fudge, 51, Fairway, Stafford.

# RELAYS

For A.C. and D.C.



2V.A. coil consumption, from 2-600 volts, tested to 2000 volts. Time lag relays, High Sensitive Relays, Synchronous Process Timers, and complete Control Plants.

Synchronous Time Delay Relay PRL—Models ranging from 2 secs. to 28 days.

Ask for leaflet SPN/EO.

## LONDEX LIMITED

Electrical Remote Control Engineers & Mfrs. Anerley Works, 207 Anerley Rd., London, S.E.23  
Phone: Sydenham 6258/9

# Varley

Quality Components

I.F. TRANSFORMERS  
WIRE WOUND RESISTANCES  
L.F. CHOKES & TRANSFORMERS  
MAINS TRANSFORMERS  
DELAY SWITCHES

Varley (Prop. Oliver Pell Control Ltd.)  
Cambridge Row Woolwich, S.E.18

# FOYLES

\* BOOKSELLERS TO THE WORLD \*

New and secondhand Books on every subject.  
Join The Scientific Book Club!  
113-125 Charing Cross Road, London, W.C.2  
Telephone: Gerrard 5660 (16 lines)

# ELECTRADIX

"Nitnday" Mains Chargers. A range for all jobs. The Lesdix Nitndays are the best and cheapest trouble-free chargers. Any A.C. mains voltage to 2, 4, 6 or 12 volts. Steel chassis. Safe for ever.  
MODEL N/A.2.1/2 is Radio Home Charger for 2 volts 1/2 amp. 15/6. MOD. N/A.6.1/2 3-cell Trickle 6 volts 1/2 amp. 22/-. MOD. N.B. 6/1. 1/2 Car Trickle 6 volt lamp 30/-. MOD. N.B. 6/1. 1/2 Car Trickle 6 volts 1 1/2 amps. 34/6. MOD. N.C. 6/2 Car Charger 46/6. MOD. N.D. 12/1 H.M. car Charger 12volts lamp. 47/6. MOD. N/D. 12/2 NK Car Charger 12 volts 2 amps. 68/6. Special MODEL N.E./2 Doubler Twin Rate Charger 6 volts and 12 volts 2 amps 81/6. Tungar Type 70 volts 6 amps. £12 10 0.

A few larger Westinghouse Chargers for trade charging re-conditioned and guaranteed. Type R.G.C. 1 £30. R.G.C. 7 £22. R.P. 10 £16 10 0

## PETROL ELECTRIC ENGINE SETS.

Pelapone 500 watt 2-stroke water cooled Engine 50/70 volts 10 amps. D.C. Shunt Dynamo. Supplies limited now. A.B.C. Twin Air Cooled Set with 50/70 volt 25 amps. Specially lightweight for portable work. Twin 2 1/2 h.p. Engines.

MICRO-MOTORS. As fitted to push-button sets. A.C. split phase motors, squirrel rotor. Dog clutch drive to spur reduction gear from 2,000 to 50 r.p.m. double shafts. Voltage 15/20 volts 50 cycles reversible enclosed 8/-. DYNAMOS & MOTORS.

Stamped envelope with all enquiries, please.

## ELECTRADIX RADIOS

19 BROUGHTON STREET,  
QUEENSTOWN ROAD,  
BATTERSEA, LONDON, S.W.3.

Phone: Macaulay 2159.

# TELEVISION:

Concise Postal Course of Instruction for Radio Engineers

Apply—

BRITISH RADIO  
ENGINEERING COLLEGE

179, CLAPHAM ROAD, LONDON, S.W. 9

(Do not delay. Be conversant with subject now and prepared for business after the War.)

## TRANSFORMERS

to customers' specifications or in accordance with standard list.



W. BRYAN SAVAGE LTD.

Westmoreland Road, London, N.W.9. Colindale 7131

## TECHNICAL BOOKS

English and Foreign Books on Radio and Electrical Engineering supplied from stock or obtained promptly to order.

(Lists post free on application.)  
LENDING LIBRARY

Annual Subscription from One Guinea. Details of revised terms free on request.

H. K. LEWIS & Co. Ltd.

136 Gower Street, London, W.C.1  
Telephone: EUSton 4282 (5 lines)

More is required for protection than merely a detachable device to hold the fuse wire in circuit. The SLYDLOK Fuse is designed to meet the needs of to-day—questions of vibration, neglect, space, identification and adaptability are all answered by the SLYDLOK design.



# SLYDLOK

VIBRATION-PROOF FUSES

Whilst producing to maximum capacity, orders can be dealt with in rotation.

EDWARD  
Wilcox  
& CO LTD


Sharston Road, Wythenshawe, MANCHESTER.



## Great Possibilities for TECHNICALLY QUALIFIED ENGINEERS KEY MEN IN WARTIME AND AFTERWARDS

The finest posts and the majority of posts in this war are technical and when the war is over, the immense increase in technique and mechanisation created for war purposes will be applied to reconstruction and commerce. An age of great possibilities for qualified engineers is here. Study at home with The T.I.G.B. and take a Recognised Engineering Qualification such as C. & G., A.F.R.Ae.S., A.M.I.Mech.E., A.M.I.E.E., etc. in which examinations T.I.G.B. Students have gained 25 FIRST PLACES and hundreds of passes. Write now for "The Engineer's Guide to Success"—200 Courses—covering all branches—Aeronautical, Tele-communication, Mechanical, Electrical, Chemical, etc. etc.

Free!



200 Courses

THE TECHNOLOGICAL INSTITUTE OF GREAT BRITAIN  
160, Temple Bar House, London, E.C.4.

## "AFTER THE WAR" TELEVISION

With the coming of Peace, and backed by the Technical advances that have resulted from the war years, TELEVISION will again spring to life and offer opportunities, as never before, to the trained man.

Now is the time to prepare for this new "market." Our Home-study "Television" Course is comprehensive, up-to-date and suitable both for the amateur and experienced Radio Engineer.

We definitely guarantee

"SATISFACTION—OR REFUND OF FEE"

You are advised to send for details of this special Television Course immediately to investigate its possibilities. Details will also be sent of A.M.I.E.E. and A.M.I.Brit.R.E. Examinations and other courses in all branches of Wireless Engineering. Our literature is quite free while stocks last.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY

Principal: Prof. A. M. Low.

337, Shakespeare House, 17/19, Stratford Place, London, W.1.

## UNIVERSAL ELECTRICAL CO.

221 CITY ROAD, LONDON, E.C.1

Telephone: CLERK 7030

### ROTARY CONVERTERS

"E.D.C." 230 D.C. Input 230 v. A.C. Output in Silence-soundproof Cabinet and Radio Filter Unit, 180 watts ...	£12 10 0
Ditto as above, 120 watts ...	£9 10 0
Ditto as above, 60 watts ...	£5 15 0
"Westinghouse" 110 D.C. Input, 110 A.C. Output, 750 watt £12 10 0	
"E.D.C." 230 A.C. Input, 230 D.C. Output, 100 watts ...	£15 0 0
"E.D.C." 240 D.C. Input, 230 A.C. Output, 500 watts ...	£12 10 0
"Crypto" 440/460 D.C. Input, 285 A.C. Output, 12.5 KVA	£30 0 0
Photo-Electric Cells ...	each 15 0
"Crypto" 2 H.P. 415 v. 3 Ph. 50 c. 710 r.p.m. S/Ring with Starter ...	£17 10 0
"Hackbridge" Transformers, 100/110 to 200/230, or 200/230 to 100/110, 2 KVA ...	£5 0 0
"Brooks" 15 h.p. Motor, 240 v. S./Ph. 50 c., with Starter	£20 0 0
"E.D.C." 460 D.C. Input, 230 v. A.C. Output, 1 KVA ...	£11 10 0
"Crypto" 230 D.C. Input, 230 v. A.C. Output, 2 KVA	£14 10 0
"Mackie" 100 D.C. Input 100 v A.C. Out. 500cs 500 watts	£12 10 0

ALL TYPES OF ROTARY CONVERTERS SOLD AND PURCHASED

# Band-pass crystal filters are available on both the EDDYSTONE '358' & '400'



## SPECIAL MODELS

of the Eddystone "358" Communication Receiver, and its counterpart the medium frequency Model "400" are available with circuits incorporating band-pass crystal filter units. Full details will be sent on request. Both these special models are supplied to priority order only.

## STANDARD MODELS

of the Eddystone "358" and the Model "400" are in full production. The ability of both these receivers to give a high signal to noise ratio under adverse conditions, their reliability and robustness, make an outstanding contribution to British Communication Receiver design.



### EDDYSTONE "358" COMMUNICATION RECEIVER

*Specification.* The receiver employs one stage of R.F. amplification, frequency changer, two I.F. amplifiers, a separate beat frequency oscillator, octal base Mullard or Osram 6.3 volt valves. Frequency range is continuous from 22m/cs to 1.25 m/cs using four fully screened interchangeable coil units. Five additional coil units extend the range to 31 m/cs, and 90 k/cs. Illuminated dial is accurately calibrated with four standard coils. Additional coils supplied with separate graph. To simplify maintenance a metre and test switch is fitted. Main tuning control incorporates fly wheel drive and spring loaded Tufnol gearing (ratio 70-1). Logging scale supersedes the old type band spread control. Separate Power unit assures freedom from drift.

### MEDIUM FREQUENCY MODEL "400"

A highly sensitive receiver covering medium frequencies only. Similar to the "358" but is provided with four coils only covering frequency range from 130 k/cs to 2,200 k/cs. Optimum gain is secured with very high signal to noise ratio.

**SUPPLIED TO PRIORITY ORDER ONLY.**

# WEBB'S RADIO

14, SOHO STREET, OXFORD STREET, LONDON, W.1  
Telephone: GERRARD 2089 Hours of Business 9 a.m. to 4 p.m. Sats. 9 a.m. to 12 noon