

ELECTRON TUBES



SEMICONDUCTORS

**TECHNICIAN'S
HANDBOOK**

CBS-HYTRON
Danvers, Massachusetts

C O N T E N T S

Receiving Tubes (Numerical—Alphabetical Order)*

Reference Guides for Seldom-Used Tubes

Table I Diodes

Table II Detector-Amplifiers (diode and triode, tetrode, pentode combined)

Table III General Purpose Triodes (single or double triode)

Table IV Voltage Amplifiers (tetrode and pentode)

Table V Converters and Mixers

Table VI Audio Power Amplifiers (triode, tetrode, and pentode)

Table VII TV Deflection Power Amplifiers (power triode, tetrode, and pentode)

Table VIII Indicators (tuning eye)

Picture Tubes (Numerical—Alphabetical Order)

Picture Tube Reference Guide

Crystal Diode Reference Guides

Germanium and Silicon Diodes

Transistors (Numerical)

Special Purpose Tube Reference Guides

Table I Computer Tubes

Table II Gaseous Diodes (voltage regulator and reference)

Table III Gaseous Triodes and Tetrodes (cold cathode and thyratron)

Table IV Phototubes

Table V Power Tetrodes, Pentodes, and Beam Tubes

Table VI Power Triodes

Table VII Receiving Tubes (Special Application)

Table VIII Receiving Tubes (Military and Industrial)

Table IX Rectifiers

Table X UHF Tubes (Transmitting and Receiving)

APPENDIX

Glossary

Interpretation of Electron Tube Ratings and Characteristics.

Series String Heaters

Rectifiers, Ratings and Rating Charts

Screen Grid Ratings and Rating Chart

Explanation of Tube Type Numbering System

Quadrature FM Detector for TV (3BN6-6BN6, etc.)

Use of Tube Testers

Installation and Handling of Picture Tubes

RETMA Color Codes

*Complete data for tubes which are identical except for heater ratings are listed under that type which has the lowest heater voltage.

Complete electrical data from RETMA registrations are given; mechanical data and characteristics curves are given in the CBS Engineer's Handbook. For additional information on a particular tube or semiconductor, write to Technical Information Service, CBS-Hytron, Danvers, Massachusetts.

N O T E S O N U S E

Electron Tube Outline Drawings: If more than one outline applies, the most common or current type is illustrated. Base style is indicated inside bulb to aid identification.

Application Descriptions: The descriptive line preceding the electrical data is the most general use for the device.

Basing Diagrams: Electron tubes have diagrams founded on the RETMA standards. Each pin is labeled with its principal connection. Secondary elements internally connected may not be indicated in the pin label. Transistor basing diagrams in this handbook originate with CBS-Hytron and indicate symbolically the element connections.

Basing Diagram Key: P—plate; G—grid; G1—grid 1, etc; G2-4—grid 2 and 4 internally connected, etc; K—cathode; IS—internal shield; IC—internal connection (do not use); $\frac{S}{NC}$ —shell for metal envelopes or no connection for glass envelopes; TAR—target; SA—starter; DP—diode plate; H—heater; HCT—heater center tap; F—filament; FCT—filament center tap; A—anode, in picture tubes includes internally connected grids and internal coating, sometimes called the ultor; C—external conductive coating of picture tubes. Transistor leads and pins: E—emitter; C—collector, B—base.

NOTE: Double circled pins connect to elements of Section 2 in multiple section tubes.

ELECTRON TUBES



SEMICONDUCTORS

C O N T E N T S

Receiving Tubes (Numerical—Alphabetical Order)*

Reference Guides for Seldom-Used Tubes

- Table I** Diodes
- Table II** Detector-Amplifiers (diode and triode, tetrode, pentode combined)
- Table III** General Purpose Triodes (single or double triode)
- Table IV** Voltage Amplifiers (tetrode and pentode)
- Table V** Converters and Mixers
- Table VI** Audio Power Amplifiers (triode, tetrode, and pentode)
- Table VII** TV Deflection Power Amplifiers (power triode, tetrode, and pentode)
- Table VIII** Indicators (tuning eye)

Picture Tubes (Numerical—Alphabetical Order)

Picture Tube Reference Guide

Crystal Diode Reference Guides

Germanium and Silicon Diodes

Transistors (Numerical)

Special Purpose Tube Reference Guides

- Table I** Computer Tubes
- Table II** Gaseous Diodes (voltage regulator and reference)
- Table III** Gaseous Triodes and Tetrodes (cold cathode and thyratron)
- Table IV** Phototubes
- Table V** Power Tetrodes, Pentodes, and Beam Tubes
- Table VI** Power Triodes
- Table VII** Receiving Tubes (Special Application)
- Table VIII** Receiving Tubes (Military and Industrial)
- Table IX** Rectifiers
- Table X** UHF Tubes (Transmitting and Receiving)

APPENDIX

- Glossary
- Interpretation of Electron Tube Ratings and Characteristics.
- Series String Heaters
- Rectifiers, Ratings and Rating Charts
- Screen Grid Ratings and Rating Chart
- Explanation of Tube Type Numbering System
- Quadrature FM Detector for TV (3BN6-6BN6, etc.)
- Use of Tube Testers
- Installation and Handling of Picture Tubes
- RETMA Color Codes

*Complete data for tubes which are identical except for heater ratings are listed under that type which has the lowest heater voltage.

Complete electrical data from RETMA registrations are given; mechanical data and characteristics curves are given in the CBS Engineer's Handbook. For additional information on a particular tube or semiconductor, write to Technical Information Service, CBS-Hytron, Danvers, Massachusetts.

ELECTRON TUBES



SEMICONDUCTORS

**TECHNICIAN'S
HANDBOOK**

CBS-HYTRON

Danvers, Massachusetts

**CBS-HYTRON ELECTRON TUBES
AND SEMICONDUCTORS**

1959 TECHNICIAN'S HANDBOOK



SECOND EDITION—FIRST PRINTING
COPYRIGHT 1958
COLUMBIA BROADCASTING SYSTEM, INC.
ALL RIGHTS RESERVED
PRINTED IN THE UNITED STATES OF AMERICA
LIBRARY OF CONGRESS CATALOG CARD
NUMBER 57-13275

"THE INFORMATION IN THIS PUBLICATION IS FURNISHED WITHOUT ANY RESPONSIBILITY ON THE PART OF THE COLUMBIA BROADCASTING SYSTEM FOR USE IN CONNECTION WITH PATENTED INVENTIONS OF THE COLUMBIA BROADCASTING SYSTEM OR OTHERS THAT MAY BE EMBODIED IN THE ARRANGEMENTS SHOWN OR DESCRIBED AND WITHOUT PREJUDICE TO THE PATENT RIGHTS OF THE COLUMBIA BROADCASTING SYSTEM."

CBS-HYTRON
DIVISION OF COLUMBIA BROADCASTING SYSTEM, INC.
DANVERS, MASSACHUSETTS

P R E F A C E

The CBS Technician's Handbook is especially prepared for the technician, experimenter, and radio amateur. It includes all receiving tubes that will be encountered in servicing American radio and television sets and most audio equipment. Full data treatment is given to those types that constitute 90% of the replacement market and those being employed in new equipment. For compactness, other types rarely encountered are presented in chart form.

For maximum usefulness in a convenient size volume, this handbook is designed for: completeness . . . easy readability . . . quick reference . . . compactness. It features original foolproof basing diagrams.

Because the service technician's efforts are expanding into diverse fields, the more popular special purpose tubes used in communications, industry, and special electronic devices are included in this volume in quick reference chart form. The abbreviated data have been selected for maximum usefulness. Additional information on the types listed will be furnished upon request.

This publication was prepared by CBS-Hytron Technical Information Service, 100 Endicott Street, Danvers, Massachusetts.



RECEIVING TUBES

(Numerical-Alphabetical Order)

With cross indexing to Reference Guides
for Seldom-Used Tubes.

NOTE: Complete data for tubes which are identical except for heater ratings are listed under that type which has the lowest heater voltage.

CBS ELECTRON TUBES



ADDITIONAL TUBE TYPES

NEW TYPE*	PROTOTYPE	DIFFERENCE
3BN4	2BN4	Heater characteristic, 450 ma. at 2.8 volts, warm-up controlled.
4CS6	6CS6	Heater characteristic, 450 ma. at 4.2 volts, warm-up controlled.
5AS4A	5AS4	T-12, straight sided bulb; overall length 4 $\frac{1}{4}$ ".
5BQ7A	4BQ7A	Heater characteristic, 450 ma. at 5.6 volts, warm-up controlled.
5BS8	4BS8	Heater characteristic, 450 ma. at 5.6 volts, warm-up controlled.
6AT8A	6AT8	Controlled warm-up time
6AU6A	6AU6	Controlled warm-up time
6AU8A	6AU8	Controlled plate knee characteristic; $E_b = 40V$, $E_{c2} = 125V$, $E_{c1} = 0V$, $I_b = 30$ ma, $I_{c2} = 10$ ma.
6BE8A	6BE8	Controlled warm-up time
6CB6A	6CB6	Controlled warm-up time
6CG8A	6CG8	Controlled warm-up time
6J6A	6J6	Controlled warm-up time
6T8A	6T8	Controlled warm-up time
6U8A	6U8	Controlled warm-up time
6V6GTA	6V6GT	Controlled warm-up time
6X8A	6X8	Controlled warm-up time
11C5	35C5	Heater characteristic, 450 ma. at 11.6 volts, warm-up controlled.
12CU5	6CU5	Heater characteristic, 600 ma. at 12.6 volts, warm-up controlled.
17BQ6GTB	6BQ6GTB	Heater characteristic, 450 ma. at 16.8 volts, warm-up controlled.
25CD6GB	6CD6GA	Heater characteristic, 600 ma. at 25 volts, warm-up controlled.

*Identical to prototype except for difference given.

CBS ELECTRON TUBES


01 • 01A • 01AA • 01B • 00 • 00A

(See chart for seldom-used tubes)



0Z4


0Z4A • 0Z4G



Gaseous full-wave rectifier for vibrator-type B supplies

HEATER CHARACTERISTICS

Heater voltage..... NONE REQUIRED
 Heater current..... NONE REQUIRED



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

	0Z4,0Z4G	0Z4A
Plate supply voltage, peak starting.....	300	volts
Plate to plate voltage, peak.....	1000	volts
Plate voltage, peak inverse.....		880 volts
Plate current, peak.....	200	ma
Output voltage, d-c.....	300	300 volts
Output current, d-c (min.).....	30	30 ma
Output current, d-c (max.).....	75	85 ma
Dynamic tube voltage drop, average.....	24	24 volts


1A3 • 1A4P/T • 1A5G/GT • 1A6

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




1A7GT



Radio-frequency converter for portable battery powered receivers

FILAMENT CHARACTERISTICS

Voltage, a-c or d-c..... 1.4 volts
Current..... 50 ma



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage..... 110 volts
Grid 3 and 5 voltage..... 60 volts
Grid 3 and 5 supply voltage..... 110 volts
Grid 2 voltage..... 110 volts
Grid 4 circuit resistance, minimum..... 1.0 meg
Cathode current, total..... 4.0 ma

CHARACTERISTICS AND TYPICAL OPERATION

Converter Service (Separate excitation)

Plate voltage..... 90 volts
Grid 2 (signal grid) voltage..... 90 volts
Grid 3 and 5 (oscillator anode) voltage*..... 45 volts
Grid 4 voltage..... 0 volts
Grid 1 (oscillator grid) resistor..... 0.2 meg
Plate resistance (approx.)..... 0.6 meg
Conversion transconductance..... 250 μ mhos
Cathode current..... 2.5 ma
Plate current..... 0.6 ma
Grid 3 and 5 (oscillator anode) current..... 0.7 ma
Grid 2 current..... 1.2 ma
Grid 1 (oscillator grid) current..... 0.035 ma

Oscillator Characteristics, Not Oscillating

Plate voltage..... 90 volts
Grid 2 voltage..... 90 volts
Grid 3 and 5 (oscillator anode) voltage..... 45 volts
Grid 4 voltage..... 0 volts
Grid 1 (oscillator grid) voltage..... 0 volts
Transconductance between grid 1 and grid 2..... 550 μ mhos
Amplification factor between grid 1 and grid 2..... 40
Cathode current..... 2.2 ma

NOTE:

*Obtained preferably by using a properly by-passed 70,000 ohm resistor in series with a 90-volt supply.

1AB5 • 1AF4 • 1AF5

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




1AX2



Half-wave power rectifier for cathode-ray-tube anode supplies

FILAMENT CHARACTERISTICS

Voltage, a-c or d-c*..... 1.4 volts
 Current..... 0.65 amp



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Filament to plate..... 0.55 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

Rectifier Service†

Plate voltage, peak inverse (absolute max.)..... 25,000 volts
 Output current, d-c..... 1.0 ma
 Plate current, peak steady state..... 11.0 ma

TYPICAL OPERATION

TV Pulse Rectifier

Plate voltage, positive pulse..... 20,000 volts
 Plate voltage, negative pulse..... 5000 volts
 Output current, d-c..... 0.3 ma
 Output voltage, d-c..... 20,000 volts

NOTES:

*Should not be less than 1.2 volts nor more than 1.6 volts.

†Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.



1B3GT




H-w rectifier for cathode-ray-tube anode supplies

FILAMENT CHARACTERISTICS

Voltage, a-c or d-c*..... 1.25 volts
 Current..... 0.2 amp

*Must not exceed 1.45 volts or be less than 1.05 volts.



CBS ELECTRON TUBES

1B3GT (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Plate to filament: p to f + i.s. 1.3 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

Flyback Rectifier Service*

Plate voltage, peak inverse
 Total d-c and peak (absolute max.) 26 kv
 D-c 21 kv
 Output current, d-c 0.5 ma
 Plate current, peak steady state 50 ma

CHARACTERISTICS

Tube voltage drop conducting 7 ma 100 volts

NOTE:

*Voltage pulse duration must not exceed 10 μs in a 30-frame, 525-line system.

**1B4/951 • 1B4P/T • 1B5/25S
 1B6 • 1B7G/GT • 1B8GT
 1C5G/GT • 1C6 • 1C7G • 1C8
 1D5GP/GT • 1D7G • 1D8GT
 1E4/G • 1E5GP • 1E5G/GT
 1E7G/GT • 1F4 • 1F5G • 1F6
 1F7G/GH/GV • 1G4G/GT
 1G5G/GT • 1G6G/GT
 1H4G/GT**

(See chart for seldom-used tubes)

CBS


1H5GT



Detector and audio amplifier for battery-type receivers

FILAMENT CHARACTERISTICS

Voltage, d-c 1.4 volts
 Current 50 ma



CBS ELECTRON TUBES

1H5GT (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield

Grid to plate: g1 to p.....	1.1	$\mu\mu\text{f}$
Input: g1 to f + b.s.....	0.75	$\mu\mu\text{f}$
Output: p to f + b.s.....	4.6	$\mu\mu\text{f}$

†JETEC shield 308 connected to negative filament terminal.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	110	volts
Diode operation current.....	0.25	ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	67.5	90	volts
Control-grid voltage.....	0	0	volts
Plate resistance (approx.).....	0.30	0.24	meg
Transconductance.....	210	275	μmhos
Amplification factor.....	60	65	
Plate current.....	0.06	0.15	ma
Average diode current with 10 volts d-c applied.....	1.5	1.5	ma

1H6G/GT • 1J5G • 1J6G/GT

(See chart for seldom-used tubes)




1L4



R-f or i-f amplifier for battery-powered receivers

FILAMENT CHARACTERISTICS

Voltage, d-c.....	1.4	volts
Current.....	50	ma



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.....	0.008	$\mu\mu\text{f}$
Input: g1 to f + g2 + g3.....	3.6	$\mu\mu\text{f}$
Output: p to f + g2 + g3.....	7.5	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	110	volts
Grid 2 voltage.....	90	volts
Grid 2 supply voltage.....	110	volts
Grid 1 voltage.....	0	volts
Cathode current.....	6.5	ma

CBS ELECTRON TUBES

1L4 (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	90	90	volts
Grid 2 (screen) voltage.....	67.5	90	volts
Grid 1 (control-grid) voltage.....	0	0	volts
Plate resistance.....	0.6	0.35	meg
Transconductance.....	925	1025	μ mhos
Plate current.....	2.9	4.5	ma
Grid 2 current.....	1.2	2.0	ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-6.0	-8.0	volts

**1L6 • 1LA4/E • 1LA6 • 1LB4
1LB6 • 1LC5 • 1LC6 • 1LD5
1LE3 • 1LF3 • 1LG5 • 1LH4
1LN5 • 1N5GT**

(See chart for seldom-used tubes)

**1N6G • 1P5GT/G • 1Q5GT/G
1Q6 • 1R4**

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




1R5



Radio frequency converter for portable battery powered receivers

FILAMENT CHARACTERISTICS

Voltage, d-c 1.4 volts
 Current 50 ma



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Signal grid to mixer plate: g3 to p.....	0.4	$\mu\mu\text{f}$
R-f input: g3 to all others.....	7.0	$\mu\mu\text{f}$
Mixer output: p to all others.....	7.5	$\mu\mu\text{f}$
Oscillator input: g1 to all others.....	3.8	$\mu\mu\text{f}$
Oscillator grid to mixer plate: g1 to p, max.....	0.10	$\mu\mu\text{f}$
Oscillator grid to signal grid: g1 to g3, max.....	0.2	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	90	volts
Grid 2 and 4 voltage.....	67.5	volts
Grid 2 and 4 supply voltage.....	90	volts
Grid 3 voltage.....	0	volts
Cathode current, total.....	5.5	ma

CHARACTERISTICS AND TYPICAL OPERATION

Converter Service (Separate excitation)

Plate voltage.....	45	67.5	90	volts
Grid 3 (signal grid) voltage.....	0	0	0	volts
Grid 2 and 4 (oscillator anode) voltage.....	45	67.5	67.5	volts
Grid 1 (oscillator grid) resistor.....	0.1	0.1	0.1	meg
Grid 1 (oscillator grid) voltage, rms.....	15	25	25	volts
Plate resistance (approx.).....	0.5	0.4	0.4	meg
Conversion transconductance.....	210	280	280	μmhos
Cathode current.....	3.0	5.2	5.3	ma
Plate current.....	0.7	1.4	1.5	ma
Grid 2 and 4 (oscillator anode) current.....	2.1	3.5	3.5	ma
Grid 1 (oscillator grid) current.....	0.15	0.25	0.25	ma
Grid 3 voltage (approx.)				
for $g_c = 10 \mu\text{mhos}$	-7.0	-13	-13	volts
Grid 3 voltage (approx.)				
for $g_c = 100 \mu\text{mhos}$	-2.2	-4.9	-5.0	volts

Oscillator Characteristics, Not Oscillating

Plate voltage.....	67.5	volts
Grid 3 voltage.....	0	volts
Grid 2 and 4 (oscillator anode) voltage.....	67.5	volts
Grid 1 (oscillator grid) voltage.....	0	volts
Transconductance between grid 1 and grids 2 + 4		
connected to plate.....	1400	μmhos
Amplification factor between grid 1 and grids 2 + 4		
connected to plate.....	6.5	
Cathode current.....	9.0	ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	17	volts

1S4

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




1S5



Diode detector — pentode voltage amplifier for audio service in battery powered receivers

FILAMENT CHARACTERISTICS

Voltage, d-c..... 1.4 volts
Current..... 50 ma



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No shield	Shield [†]	
Grid to plate: g1 to p, max.....	0.2		$\mu\mu\text{f}$
Input: g1 to f + g2 + g3.....	2.2		$\mu\mu\text{f}$
Output: p to f + g2 + g3.....	2.4		$\mu\mu\text{f}$
Diode plate to grid 1: dp to g1, max.....	0.1	0.1	$\mu\mu\text{f}$

[†]JETEC shield 316 connected to pin 1

MAXIMUM RATINGS (Design center values)

Plate voltage.....	90	volts
Grid 2 voltage.....	90	volts
Grid 1 voltage, negative d-c.....	-50	volts
Grid 1 voltage, positive d-c.....	0	volts
Cathode current.....	3.0	ma
Diode current for continuous operation.....	0.25	ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	67.5	volts
Grid 3 (suppressor).....	connected to filament at socket	
Grid 2 supply voltage.....	67.5	volts
Grid 1 (control-grid) voltage.....	0	volts
Plate resistance (approx.).....	0.6	meg
Transconductance.....	625	μmhos
Plate current.....	1.6	ma
Grid 2 current.....	0.4	ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-5	volts
Diode current, av., at 10 volts d-c.....	1.5	ma

Pentode unit as resistance coupled amplifier

Plate supply voltage.....	45	90	volts
Grid 2 supply voltage.....	45	90	volts
Grid 1 voltage.....	0	0	volts
Plate load resistor.....	470,000	470,000	ohms
Grid 1 resistor.....	10	10	meg
Grid 2 series resistor.....	2.2	2.2	meg
Grid 2 by-pass capacitor.....	0.1	0.1	μf
Input capacitor.....	0.01	0.01	μf
Output capacitor.....	0.01	0.01	μf
Grid resistor of following stage.....	1.0	1.0	meg
Signal source impedance.....	1000	1000	ohms
Distortion.....	5	5	%
Output voltage.....	5.5	17.0	volts
Voltage gain at 400 cps.....	33	50	

1SA6GT • 1SB6GT

(See chart for seldom-used tubes)




1T4



**Pentode voltage amplifier for r-f or i-f service
in battery powered receivers**

FILAMENT CHARACTERISTICS

Voltage, d-c..... 1.4 volts
Current..... 50 ma



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No shield	Shield†	
Grid to plate: g1 to p, max.....	0.01	0.01	$\mu\mu\text{f}$
Input: g1 to f + g2 + g3 + i.s.....	3.6	3.6	$\mu\mu\text{f}$
Output: p to f + g2 + g3 + i.s.....	7.5	7.5	$\mu\mu\text{f}$

†JETEC shield 316 connected to pin 1

MAXIMUM RATINGS (Design center values)

Plate voltage.....	90 volts
Grid 2 voltage.....	90 volts
Grid 1 voltage, positive d-c.....	0 volts
Cathode current.....	5.5 ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	45	67.5	90	90	volts
Grid 3 (suppressor).....	connected to filament at socket				
Grid 2 (screen) voltage.....	45	67.5	45	67.5	volts
Grid 1 (control-grid) voltage.....	0	0	0	0	volts
Plate resistance (approx.).....	0.35	0.25	0.8	0.5	meg
Transconductance.....	700	875	750	900	μmhos
Plate current.....	1.7	3.4	1.8	3.5	ma
Grid 2 current.....	0.7	1.5	0.65	1.4	ma
Grid 1 voltage (approx.) for $g_m = 10 \mu\text{mhos}$	-10	-16	-10	-16	volts

1T5GT

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




1U4



Pentode voltage amplifier for r-f, i-f and audio service in battery powered receivers

FILAMENT CHARACTERISTICS

Voltage, d-c 1.4 volts
Current 50 ma



6AR

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No shield	Shield†	
Grid to plate: g1 to p, max.....	0.01	0.01	$\mu\mu\text{f}$
Input: g1 to f + g2 + g3 + i.s.....	3.6	3.6	$\mu\mu\text{f}$
Output: p to f + g2 + g3 + i.s.....	7.5	7.5	$\mu\mu\text{f}$

†JETEC shield 316 connected to pin 1 or pin 5

MAXIMUM RATINGS (Design center values)

Plate voltage.....	110 volts
Grid 2 voltage.....	110 volts
Grid 1 voltage, positive d-c.....	0 volts
Cathode current.....	6.0 ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	90 volts
Grid 3 (suppressor).....	connected to filament at socket
Grid 2 (screen) voltage.....	90 volts
Grid 1 (control-grid) voltage.....	0 volts
Plate resistance (approx.).....	1.0 meg
Transconductance.....	900 μmhos
Plate current.....	1.6 ma
Grid 2 current.....	0.45 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-4 volts




1U5



Diode detector—pentode voltage amplifier for audio service in battery powered receivers

FILAMENT CHARACTERISTICS

Voltage, d-c 1.4 volts
Current 50 ma



6BW

CBS ELECTRON TUBES

1U5 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No shield	Shield†
Grid to plate: g1 to p, max.....	0.2	$\mu\mu\text{f}$
Input: g1 to f + g2 + g3.....	2.2	$\mu\mu\text{f}$
Output: p to f + g2 + g3.....	2.4	$\mu\mu\text{f}$
Diode plate to grid 1: dp to g1, max.....	0.04	0.04 $\mu\mu\text{f}$

†JETEC shield 316 connected to pin 1

Type 1U5 is identical to type 1S5 except for basing and capacitances.

1U6 • 1V

(See chart for seldom-used tubes)




1V2



Half-wave rectifier for cathode-ray-tube anode supplies

FILAMENT CHARACTERISTICS

Voltage, a-c.....	0.625 volt
Current.....	0.3 amp



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCE

Plate to filament.....	0.8	$\mu\mu\text{f}$
------------------------	-----	------------------

MAXIMUM RATINGS (Design center values)

Pulsed Rectifier Service*

Plate voltage		
Total d-c and peak (absolute max.).....	8.25	kv
D-c.....	6.6	kv
Plate current, peak steady state.....	10	ma
Plate current, average.....	0.5	ma

CHARACTERISTICS

Tube drop conducting 7 ma, approx.....	135	volts
--	-----	-------

†Should not exceed .725 volts nor be less than .525 volts.

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30 frame system.

1W4

(See chart for seldom-used tubes)

CBS ELECTRON TUBES



1X2


1X2A



Half-wave rectifier for cathode-ray-tube anode supplies

FILAMENT CHARACTERISTICS

Voltage, a-c or d-c..... 1.25 volts
 Current..... 0.2 amp



MAXIMUM RATINGS (Absolute maximum value)

	1X2	1X2A	
Plate voltage, peak inverse	15	20	kv

Types 1X2 and 1X2A are identical to type 1X2B except for lower peak inverse plate voltage.




1X2B



Half-wave rectifier for cathode-ray-tube anode supplies

FILAMENT CHARACTERISTICS

Voltage, a-c or d-c..... 1.25 volts
 Current..... 0.2 amp



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCE

Plate to filament..... 1.0 μf

MAXIMUM RATINGS (Design center values unless noted)

Flyback Rectifier Service*

Plate voltage, peak inverse (absolute max.)..... 22 kv
 Output current, d-c..... 0.5 ma
 Plate current, peak steady state..... 45 ma

CHARACTERISTICS

Tube Voltage Drop

Conducting 7 ma..... 100 volts

TYPICAL OPERATION

Flyback Rectifier Service*

Peak plate voltage, positive..... 18 kv
 Peak plate voltage, negative..... 2,000 volts
 Output voltage, d-c..... 18 kv
 Peak plate current..... 35 ma
 Output current, d-c..... 0.1 ma

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

2A3/2A3H • 2A5 • 2A6 • 2A7/S

(See chart for seldom-used tubes)

CBS 2AF4



Triode for uhf local oscillator service, heater warm-up controlled for series strings

Type 2AF4 is identical to type 2AF4A except for bulb length.

CBS 2AF4A




Triode for uhf local oscillator service, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	2.35 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	50 volts
Heater positive to cathode*.....	50 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)	

*D-c component must not exceed 25 volts max.



7DK

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	1.9	$\mu\mu\text{f}$
Input: g1 to k + h.....	2.2	$\mu\mu\text{f}$
Output: p to k + h.....	0.45	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	150 volts
Control-grid voltage, negative d-c.....	-50 volts
Control-grid current, d-c.....	8.0 ma
Plate input.....	2.5 watts
Plate dissipation.....	2.25 watts
Cathode current.....	28 ma
Control-grid circuit resistance	
Fixed bias.....	Not recommended
Self bias.....	0.5 meg

CBS ELECTRON TUBES

2AF4A (cont.)

CHARACTERISTICS

Class A₁ Amplifier

Plate voltage.....	80	100	volts
Cathode-bias resistor.....	150	150	ohms
Plate resistance (approx.).....	2270	2130	ohms
Transconductance.....	6600	7500	μmhos
Amplification factor.....	15	16	
Plate current.....	16	20	ma

TYPICAL OPERATION

Oscillator at 950 megacycles

Plate voltage.....	100	volts
Control-grid voltage.....	-4	volts
Control-grid resistor.....	10,000	ohms
Plate current.....	22	ma
Control-grid current.....	0.4	ma
Power output.....	160	mw



2B3




H-w rectifier for cathode-ray-tube anode supplies

FILAMENT CHARACTERISTICS

Voltage, a-c or d-c*.....	1.75	volts
Current.....	0.25	amp

*Must not exceed 2.0 volts or be less than 1.5 volts.



Type 2B3 is identical to type 1B3 except for filament characteristics and basing.

2B7/S

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




2BN4



R-f amplifier in vhf television tuners, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c. 2.3 volts
- Current 600 ma
- Peak heater-cathode voltage, max.
Heater negative to cathode 100 volts
- Heater positive to cathode 100 volts
- Warm-up time 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield†

- Grid to plate: g1 to p. 1.2 $\mu\mu\text{f}$
- Input: g1 to k + h. 3.2 $\mu\mu\text{f}$
- Output: p to k + h. 1.4 $\mu\mu\text{f}$
- Heater to cathode: h to k. 2.8 $\mu\mu\text{f}$

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design maximum values)

- Plate voltage. 275 volts
- Control-grid voltage, positive d-c. 0 volts
- Plate dissipation. 2.2 watts
- Cathode current. 22 ma
- Control-grid circuit resistance 0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

- Plate voltage. 150 volts
- Cathode-bias resistor. 220 ohms
- Plate resistance (approx.) 6300 ohms
- Transconductance. 6800 μmhos
- Amplification factor. 43
- Plate current. 9.0 ma
- Control-grid voltage (approx.) for $I_b = 100 \mu\text{a}$ -6.0 volts

2E5 • 2G5 • 2S/4S

(See chart for seldom-used tubes)

CBS ELECTRON TUBES



2T4




Triode for uhf local oscillator service, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 2.35 volts
 Current..... 600 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 50 volts
 Heater positive to cathode*..... 50 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 25 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No shield	Shield†	
Grid to plate: g1 to p.....	1.7	1.7	μμf
Input: g1 to k + h.....	3.3	2.9	μμf
Output: p to k + h.....	1.8	0.25	μμf
Heater to cathode‡.....	2.9	3.0	μμf
Grid to cathode‡.....	2.6	2.6	μμf
Plate to cathode‡.....	0.18	0.2	μμf
Grounded grid operation			
Input.....	5.7	5.5	μμf
Output.....	3.4	1.8	μμf

†JETEC shield 316 connected to cathode.

‡Measured between specified elements only. When external shield is used it shall be grounded.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	200 volts
Control-grid current, d-c.....	3.0 ma
Plate dissipation.....	3.5 watts
Cathode current.....	30 ma

CHARACTERISTICS

Class A Amplifier

Plate voltage.....	80 volts
Cathode-bias resistor.....	150 ohms
Plate resistance (approx.).....	1860 ohms
Transconductance.....	7000 μmhos
Amplification factor.....	13
Plate current.....	18 ma
Control-grid voltage (approx.) for I _b = 50 μa.....	-15 volts

TYPICAL OPERATION

Oscillator at 950 megacycles

Plate voltage.....	80 volts
Control-grid voltage (self bias).....	-4 volts
Control-grid resistor.....	10,000 ohms
Plate current.....	18 ma
Control-grid current.....	400 μa

2V2 • 2V3G • 2W3/GT • 2Z2/G84

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




3A2



Half-wave rectifier for cathode-ray-tube anode supplies

HEATER CHARACTERISTICS

Voltage, a-c..... 3.15 volts
 Current..... 0.22 amp



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCE

Plate to cathode, heater,
 and internal shield: p to k + h + i.s..... 1.0 μf

MAXIMUM RATINGS (Design center values)

TV Pulse Rectifier Service*


Plate voltage, peak inverse..... 18 kv
 Plate current, peak steady state..... 80 ma
 Plate current, average..... 1.5 ma

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

TYPICAL CIRCUIT

TRI-COLOR FOCUS RECT.

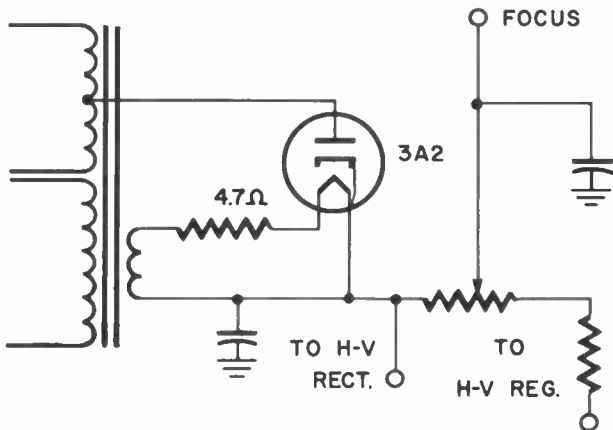




3A3



Half-wave rectifier for tricolor cathode-ray-tube anode supplies

HEATER CHARACTERISTICS

Voltage, a-c.....	3.15 volts
Current.....	0.22 amp



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCE

Plate to cathode, heater, internal shield: p to k + h + i.s.....	1.5	μ f
---	-----	---------

MAXIMUM RATINGS (Design center values)

TV Pulse Rectifier Service*

Plate voltage, peak inverse.....	30	kv
Plate current, peak steady state.....	80	ma
Plate current, average.....	1.5	ma

NOTES:

*Voltage pulse duration must not exceed 10 μ s in a 525-line, 30-frame system.

3A5 • 3A8GT

(See chart for seldom-used tubes)



3AL5




Duodiode detector for warm-up time controlled, 600-ma heater strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15 volts
Current.....	600 ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average (See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



CBS ELECTRON TUBES

3AL5 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Plate input (each section): p to k + h & i.s. ...	2.5	3.2	μmf
Cathode input (each section): k to p + h & i.s. ...	3.4	3.6	μmf
Plate to plate:			
p1 to p2 (all others grounded), max.	0.068	0.026	μmf
Cold resonant frequency (each unit, approx.)	700		mc

†JETEC shield 316 connected to pin 6.

MAXIMUM RATINGS (Design center values)

Plate voltage, peak inverse	330	volts
Plate current, peak steady state (each plate).....	54	ma
Output current, d-c (each plate).....	9	ma

TYPICAL OPERATION

Half-Wave Rectifier*

Plate supply voltage, rms (each plate).....	117	volts
Plate supply impedance, min. total effective (each plate)	300	ohms
Output current, d-c (each plate).....	9.0	ma

NOTES:

*The two units may be used separately or in parallel.




3AU6



**R-f amplifier, f-m limiter, & audio amplifier,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15	volts
Current.....	600	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode	200	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11	secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)		
*D-c component 100 volts max.		



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.....	0.0035	μmf
Input: g1 to k + h + g2 + g3 & i.s.....	5.5	μmf
Output: p to k + h + g2 + g3 & i.s.....	5.0	μmf

CBS ELECTRON TUBES

3AU6 (cont.)

MAXIMUM RATINGS (Design center values)

	Triode†	Pentode	
Plate voltage.....	250	300	volts
Grid 2 voltage.....	See Rating Chart in Appendix		
Grid 2 supply voltage.....		300	volts
Grid 1 voltage, positive d-c.....	0	0	volts
Plate dissipation.....	3.2	3	watts
Grid 2 dissipation.....		0.65	watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode†		Pentode		
Plate supply voltage.....	250	100	250	250	volts
Grid 3 (suppressor).....	connected to cathode at socket				
Grid 2 (screen) voltage.....	100	125	150	150	volts
Cathode bias resistor.....	330	150	100	68	ohms
Plate resistance (approx.).....	.0075	0.5	1.5	1.0	meg
Transconductance.....	4800	3900	4500	5200	μmhos
Plate current.....	12.2	5.0	7.6	10.6	ma
Grid 2 current.....		2.1	3.0	4.3	ma
Grid 1 voltage (approx.) for $I_b = 10 \mu a$	-4.2	-5.5	-6.5		volts
Amplification factor.....	36				

†Grid 2 (screen) tied to plate.



3AV6




Detector, avc, and audio amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15	volts
Current.....	600	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11	secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)		

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p.....	2.0	2.0	μμf
Input: g1 to k + h.....	2.2	2.2	μμf
Output: p to k + h.....	0.8	1.2	μμf
Plate (diode 2) to grid, max.....	0.04	0.04	μμf

†JETEC shield 316 connected to cathode

CBS ELECTRON TUBES

3AV6 (cont.)

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Diode voltage drop conducting 0.8 ma.....	10	volts
Control-grid voltage, positive d-c.....	0	volts
Plate dissipation.....	0.5	watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250	volts
Control-grid voltage.....	-1	-2	volts
Plate resistance (approx.).....	.08	.0625	meg
Transconductance.....	1250	1600	μ mhos
Amplification factor.....	100	100	
Plate current.....	0.5	1.2	ma

3B7/1291

(See chart for seldom-used tubes)



3BA6




Pentode amplifier for r-f or i-f service, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15	volts
Current.....	600	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11	secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



CBS ELECTRON TUBES

3BA6 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p, max.....	0.0035	0.0035	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	5.5	5.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	5.0	5.5	$\mu\mu\text{f}$

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 voltage.....	See Rating Chart in Appendix
Grid 2 supply voltage.....	300 volts
Grid 1 voltage, negative d-c.....	50 volts
Grid 1 voltage, positive d-c.....	0 volts
Plate dissipation.....	3.0 watts
Grid 2 dissipation.....	0.6 watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....	100	100 volts
Cathode bias resistor.....	68	68 ohms
Plate resistance (approx.).....	0.25	1.0 meg
Transconductance.....	4300	4400 μmhos
Plate current.....	10.8	11.0 ma
Grid 2 current.....	4.4	4.2 ma
Grid 1 voltage (approx.) for $g_m = 40 \mu\text{mhos}$	-20	-20 volts



3BC5




Pentode amplifier for r-f or i-f service, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)	

*D-c component must not exceed 100 volts max.



CBS ELECTRON TUBES

3BC5 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Pentode connection	No Shield	Shield†	
Grid to plate: g1 to p, max.	0.030	0.020	μμf
Input: g1 to k + h + g2 + g3 & i.s.	6.5	6.6	μμf
Output: p to k + h + g2 + g3 & i.s.	1.8	2.6	μμf
Triode connection (g2 tied to plate)			
Grid to plate: g1 to p + g2	2.5	2.5	μμf
Input: g1 to k + h + g3 & i.s.	3.9	4.0	μμf
Output: p + g2 to k + h + g3 & i.s.	3.0	4.3	μμf

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

	Triode*	Pentode	
Plate voltage	300	300	volts
Grid 2 voltage	Plate	See Rating Chart	
Grid 2 supply voltage	Plate	300	volts
Grid 1 voltage, positive d-c.	0	0	volts
Plate dissipation	2.5	2.0	watts
Grid 2 dissipation		0.5	watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode*			Pentode		
Plate voltage	250	180	100	125	150	volts
Grid 2 (screen) voltage	Plate	Plate	100	125	150	volts
Cathode bias resistor	820	330	180	100	180	ohms
Plate resistance (approx.)	.009	.006	0.6	0.5	0.8	meg
Transconductance	4400	6000	4900	6100	5700	μmhos
Plate current	6.0†	8.0†	4.7	8.0	7.5	ma
Grid 2 current			1.4	2.4	2.1	ma
Grid 1 voltage (approx.) for $I_b = 10 \mu a$			-5.0	-6.0	-8.0	volts
Amplification factor	40	42				

NOTES:

*Grid 2 tied to plate.

†Total current flowing to plate and grid 2.



3BE6




Radio-frequency converter for warm-up time controlled, 600-ma heater strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.	3.15	volts
Current	600	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode	200	volts
Heater positive to cathode*	200	volts
Warm-up time	11 secs. average	
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)		

*D-c component must not exceed 100 volts max.



CBS ELECTRON TUBES

3BE6 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Shield†	No Shield	
Signal grid to mixer plate: g3 to p, max.	0.25	0.30	μμf
R-f input: g3 to all others, max.	7.0	7.0	μμf
Mixer output: p to all others.	13	8.0	μμf
Oscillator input: g1 to all others.	5.5	5.5	μμf
Oscillator output: k and g5 to all except g1.	20	15	μμf
Oscillator grid to cathode and grid 5: g1 to k and g5.	3.0	3.0	μμf
Oscillator grid to mixer plate: g1 to p, max..	0.05	0.1	μμf
Oscillator grid to signal grid: g1 to g3, max..	0.15	0.15	μμf

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.	300 volts
Grid 2 and 4 voltage.	100 volts
Grid 2 and 4 supply voltage.	300 volts
Grid 3 voltage, negative d-c.	50 volts
Grid 3 voltage, positive d-c.	0 volts
Plate dissipation.	1 watt
Grid 2 and 4 dissipation.	1 watt
Cathode current, total.	14 ma

CHARACTERISTICS AND TYPICAL OPERATION

Converter Service (Separate excitation)*

Plate voltage.	100	250 volts
Grid 3 (signal grid) voltage.	-1.5	-1.5 volts
Grid 2 and 4 (oscillator anode) voltage.	100	100 volts
Grid 1 (oscillator grid) resistor.	20,000	20,000 ohms
Grid 1 (oscillator grid) voltage, rms.	10	10 volts
Plate resistance (approx.)	0.4	1.0 meg
Conversion transconductance.	455	475 μmhos
Plate current.	2.6	2.9 ma
Grid 2 and 4 (oscillator anode) current.	7.0	6.8 ma
Grid 1 (oscillator grid) current.	0.5	0.5 ma
Grid 3 voltage (approx.) for $g_c = 10 \mu\text{mhos}$	-30	-30 volts
Grid 3 voltage (approx.) for $g_c = 100 \mu\text{mhos}$	-6	-6 volts

Oscillator Characteristics, Not Oscillating

Plate voltage.	100 volts
Grid 3 voltage.	0 volts
Grid 2 and 4 (oscillator anode) voltage.	100 volts
Grid 1 (oscillator grid) voltage.	0 volts
Transconductance between grid 1 and grid 2.	7250 μmhos
Amplification factor between grid 1 and grid 2.	20
Cathode current.	25 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-11 volts

*Values listed correspond closely to those for a self-excited oscillator circuit operating with zero bias.



3BN4




R-f amplifier in vhf television tuners, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.	2.8 volts
Current.	450 ma
Peak heater-cathode voltage, max. Heater negative to cathode.	100 volts
Heater positive to cathode.	100 volts
Warm-up time.	11 secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual).




Type 3BN4 is identical to types 2BN4 and 6BN4 except for heater characteristics. See type 2BN4 for ratings and operating characteristics.

CBS ELECTRON TUBES



3BN6




Gated-beam tube for service as f-m discriminator, limiter, and audio amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid 1 to all: g1 to k + h + g2 + g3 + p.....	4.2	$\mu\mu\text{f}$
Grid 3 to all: g3 to k + h + g1 + g2 + p.....	3.3	$\mu\mu\text{f}$
Grid 1 to grid 3: g1 to g3, max.....	0.004	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate supply voltage.....	300 volts
Grid 2 voltage.....	100 volts
Grid 1 voltage, peak positive.....	55 volts
Cathode current, d-c.....	11.5 ma

CHARACTERISTICS AND TYPICAL OPERATION

Limiter-Discriminator Service*

Input signal center frequency.....	10.7	10.7	4.5	mc
Frequency deviation.....	± 75	± 75	± 25	kc
Plate supply voltage.....	85	285	270	volts
Plate voltage.....	63	122	121	volts
Grid 2 (accelerator) voltage.....	55	100	100	volts
Cathode bias resistor, R_c	200-400	200-400	200-400	ohms
Plate load resistor, R_L085	0.33	0.33	meg
Plate linearity resistor, R_d	470	1500	1000	ohms
Integrating capacitor, C_1	0.002	0.001	0.001	μf
Coupling capacitor, C_c	0.25	0.01	0.25	μf
Minimum signal voltage for limiting action, rms†.....	1.25	1.25	1.25	volts
Plate current, d-c.....	0.25	0.49	0.44	ma
Grid 2 current.....	4.1	9.8	10.0	ma
Input signal level for a-m rejection adjustment†.....	1.25	2.0	2.0	volts
A-m rejection at E sig = 2.0 volts, rms.....	31	20	25	db
A-m rejection at E sig = 3.0 volts, rms.....	30	29	30	db
Total harmonic distortion.....	2.0	1.6	1.8	%
Peak audio output voltage.....	6.0	16.6	16.8	volts

NOTES:

*See diagram in Basic Circuits section of Appendix.

†Adjust for maximum a-m rejection in the output of the limiter-discriminator stage at the specified signal level. A-m rejection is measured with an applied signal containing 30 percent amplitude modulation and 30 percent frequency modulation.

‡At signals above specified level, limiting is within ± 2 db.




3BU8



**Combined sync and agc tube for television receivers,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15 volts
Current.....	600 ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average (See Series-String Heaters section of APPENDIX in CBS Tube Manual.)
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid 3 to plate, each section.....	1.9	$\mu\mu\text{f}$
Grid 1 to all others.....	6.0	$\mu\mu\text{f}$
Grid 3 (each section) to all others.....	3.6	$\mu\mu\text{f}$
Plate (each section) to all others.....	3.0	$\mu\mu\text{f}$
Grid 3 (section 1) to grid 3 (section 2), max.....	0.0015	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage*.....	300 volts
Grid 2 voltage.....	120 volts
Grid 3 voltage, positive d-c*.....	3.0 volt
Grid 3 voltage, negative d-c*.....	50 volts
Grid 3 voltage, peak positive*.....	50 volts
Grid 1 voltage, negative d-c.....	50 volts
Plate dissipation*.....	1.1 watts
Grid 2 dissipation.....	0.75 watt
Cathode current.....	12 ma
Grid 1 circuit resistance.....	0.5 meg
Grid 3 circuit resistance.....	0.5 meg

AVERAGE CHARACTERISTICS

Both Sections Operating

Plate voltage*.....	100	100 volts
Grid 2 (screen) voltage.....	67.5	67.5 volts
Grid 3 (suppressor) voltage*.....	-10	0 volts
Plate current*.....		2.2 ma
Grid 2 current.....	6.5	3.3 ma
Cathode current.....	6.6	7.8 ma

Each Section (Plate and Grid 3 of Opposite Section Grounded)

Plate voltage.....	100	100 volts
Grid 2 (screen) voltage.....	67.5	67.5 volts
Grid 3 (suppressor) voltage.....	0	0 volts
Grid 1 (control-grid) voltage.....	0	†
Transconductance (grid 3).....	180	μmhos
Transconductance (grid 1).....	1500	μmhos
Plate current.....		2.2 ma
Grid 3 voltage when $I_b = 100 \mu\text{a}$		-4.5 volts
Grid 1 voltage when $I_b = 100 \mu\text{a}$		-2.3 volts

NOTES:

†With grid current adjusted for 100 μa , d-c.

*Each section.




3BY6



Gated amplifier for service as sync separator or clipper, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)	
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid 1 to plate: g1 to p.....	0.08	$\mu\mu f$
Grid 3 to plate: g3 to p.....	0.35	$\mu\mu f$
Grid 1 to all others:		
g1 to k + h + g2 + g3 + g4 + g5 + p.....	5.4	$\mu\mu f$
Grid 3 to all others:		
g3 to k + h + g1 + g2 + g4 + g5 + p.....	6.9	$\mu\mu f$
Plate to all others:		
p to k + h + g1 + g2 + g3 + g4 + g5.....	7.6	$\mu\mu f$
Grid 1 to grid 3: g1 to g3, max.....	0.15	$\mu\mu f$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 and 4 voltage.....	See Rating Chart in Appendix
Grid 2 and 4 supply voltage.....	300 volts
Grid 3 voltage, negative d-c.....	50 volts
Grid 3 voltage, positive d-c.....	0 volts
Grid 3 voltage, peak positive.....	25 volts
Grid 1 voltage, negative d-c.....	100 volts
Plate dissipation.....	2.0 watts
Grid 2 and 4 dissipation.....	1.0 watt
Grid 3 input.....	0.1 watt
Grid 1 input.....	0.1 watt
Grid 3 circuit resistance	
With fixed bias.....	0.5 meg
With cathode bias.....	1.0 meg
Grid 1 circuit resistance	
With fixed bias.....	0.5 meg
With cathode bias.....	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	250	250	250 volts
Grid 2 and 4 (screen) voltage.....	100	100	100 volts
Grid 3 voltage.....	0	-2.5	volts
Grid 1 voltage.....	-4.0	-2.5	volts
Grid 3 transconductance.....		500	$\mu mhos$
Grid 1 transconductance.....		1900	$\mu mhos$
Plate current.....		6.5	ma
Screen current.....		9.0	ma
Grid 3 voltage (approx.) for $I_b = 35 \mu a$	-15		volts
Grid 1 voltage (approx.) for $I_b = 35 \mu a$	-12		volts

Sync Separator and Sync Clipper

Plate voltage.....	25	25	10 volts
Grid 2 and 4 (screen) voltage.....	25	25	25 volts
Grid 3 voltage.....	0	0	0 volts
Grid 1 voltage.....	0	0	0 volts
Plate current.....		1.4	ma
Screen current.....		3.5	ma
Grid 3 voltage (approx.) for $I_b = 50 \mu a$	-2.5		volts
Grid 1 voltage (approx.) for $I_b = 50 \mu a$	-2.3		volts

CBS ELECTRON TUBES




3BZ6



**Pentode i-f amplifier for gain-controlled stages,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 3.15 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
Heater negative to cathode†..... 300 volts
- Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- †D-c component must not exceed 200 volts max.
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p, max.....	0.025	0.015	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3 & i.s.....	7.0	7.0	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3 & i.s.....	2.0	3.0	$\mu\mu\text{f}$

†JTEC shield 316 connected to cathode

MAXIMUM RATINGS (Design maximum values)

Plate voltage.....	330 volts
Grid 2 voltage.....	See Rating Chart in Appendix
Grid 2 supply voltage.....	330 volts
Plate dissipation.....	2.3 watts
Grid 2 dissipation.....	0.55 watt
Grid 1 circuit resistance	
Fixed bias.....	0.25 meg
Self bias.....	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	125 volts
Grid 3 (suppressor).....	connected to cathode at socket
Grid 2 (screen) voltage.....	125 volts
Cathode bias resistor.....	56 ohms
Plate resistance (approx.).....	0.26 meg
Transconductance.....	8000 μmhos
Plate current.....	14 ma
Grid 2 current.....	3.6 ma
Grid 1 voltage (approx.) for $g_m = 50 \mu\text{mhos}$	-19 volts
Transconductance ($E_{c1} = -4.5\text{V}$, $R_k = 0$).....	700 μmhos

3C6

(See chart for seldom-used tubes)




3CB6



Pentode amplifier for r-f or i-f service, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c.... 3.15 volts
- Current... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode 300 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p, max.....	0.025	0.15	μμf
Input: g1 to k + h + g2 + g3 & i.s.....	6.5	6.5	μμf
Output: p to k + h + g2 + g3 & i.s.....	2.0	3.0	μμf

†JETEC shield 316 connected to cathode

MAXIMUM RATINGS (Design maximum values)

Plate voltage.....	330 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX
Grid 2 supply voltage.....	330 volts
Grid 1 voltage, positive d-c.....	0 volts
Plate dissipation.....	2.3 watts
Grid 2 dissipation.....	0.55 watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	125 volts
Grid 3 (suppressor).....	connected to cathode at socket
Grid 2 (screen) voltage.....	125 volts
Cathode bias resistor.....	56 ohms
Plate resistance (approx.).....	0.28 meg
Transconductance.....	8000 μmhos
Plate current.....	13 ma
Grid 2 current.....	3.7 ma
Grid 1 voltage (approx.) for $I_b = 20 \mu a$	-6.5 volts
Plate current at $E_{c1} = -3V, R_k = 0$	2.8 ma




3CE5



**Controlled-cutoff pentode for r-f or i-f service,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 3.15 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
Heater negative to cathode..... 200 volts
- Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 sec. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

- Grid to plate: g1 to p, max..... 0.030 $\mu\mu\text{f}$
- Input: g1 to k + h + g2 + g3..... 6.5 $\mu\mu\text{f}$
- Output: p to k + h + g2 + g3..... 1.9 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

- Plate voltage..... 300 volts
- Grid 2 voltage..... 150 volts
- Plate dissipation..... 2.0 watts
- Grid 2 dissipation..... 0.5 watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

- Plate voltage..... 125 volts
- Grid 3 (suppressor)..... connected to cathode at socket
- Grid 2 (screen) voltage..... 125 volts
- Grid 1 (control-grid) supply voltage..... -1 volts
- Grid 1 resistor (bypassed)*..... 1.0 meg
- Plate resistance (approx.)..... 0.3 meg
- Transconductance..... 7600 μmhos
- Plate current..... 11.0 ma
- Grid 2 current..... 2.8 ma
- Grid 1 voltage (approx.) for $I_b = 35 \mu\text{a}$ -5.0 volts

NOTE:

*Bypass of 1000 μf .




3CF6



**Controlled-cutoff pentode for r-f or i-f service,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15	volts
Current.....	600	ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	300	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11 sec. average	
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)		
*D-c component 100 volts max.		



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.....	0.020	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	6.3	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	1.9	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Grid 2 voltage.....	150	volts
Plate dissipation.....	2.0	watts
Grid 2 dissipation.....	0.5	watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	200	volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....	150	volts
Cathode bias resistor.....	180	ohms
Plate resistance (approx.).....	0.6	meg
Transconductance.....	6200	μmhos
Plate current.....	9.5	ma
Grid 2 current.....	2.8	ma
Grid 1 voltage (approx.) for $I_b = 35 \mu\text{a}$	-6.5	volts



3CS6




Heptode sync separator and clipper, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 sec. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)	

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid 3 to plate: g3 to p, max.....	0.36	$\mu\mu\text{f}$
Grid 3 to all except plate.....	7.0	$\mu\mu\text{f}$
Output: p to all others.....	7.5	$\mu\mu\text{f}$
Grid 1 to plate: g1 to p, max.....	0.07	$\mu\mu\text{f}$
Grid 1 to all except plate.....	5.5	$\mu\mu\text{f}$
Coupling: g1 to g3, max.....	0.22	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Grid 2 and 4 voltage.....	100	volts
Grid 2 and 4 supply voltage.....	300	volts
Plate dissipation.....	1.0	watt
Grid 2 and 4 dissipation.....	1.0	watt
Cathode current, total.....	14	ma
Grid 1 circuit resistance.....	0.47	meg
Grid 3 circuit resistance.....	2.2	meg

CHARACTERISTICS

Plate voltage.....	10	100	100	volts
Grid 3 (signal grid 2) voltage.....	0	-1	0	volts
Grid 2 and 4 (screen) voltage.....	30	30	30	volts
Grid 1 (signal grid 1) voltage, rms.....	0	0	-1.0	volts
Plate resistance (approx.).....		0.7	1.0	meg
Transconductance between grid 1 and plate.....			1100	μmhos
Transconductance between grid 3 and plate.....		1500		μmhos
Plate current.....	2.0	0.8	1.0	ma
Grid 2 and 4 (screen) current.....	4.5	5.5	1.3	ma
Grid 1 voltage (approx.) for $I_b = 50 \mu\text{a}$			-2.5	volts
Grid 3 voltage (approx.) for $I_b = 50 \mu\text{a}$		-2.2		volts

3D6

(See chart for seldom-used tubes)

CBS ELECTRON TUBES



3DT6




Dual controlled pentode for f-m detector and limiter, mixer, or gain-controlled amplifier use, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.15 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual.)	

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield†

Grid 1 to plate: g1 to p.....	0.02	μμf
Grid 1 to grid 3: g1 to g3.....	0.1	μμf
Grid 3 to all others.....	6.1	μμf
Grid 1 to grid 2 + grid 3 + heater + cathode + i.s.....	5.8	μμf
Grid 3 to plate.....	1.4	μμf

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

F-m Detector Service*

Plate voltage.....	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX
Grid 2 supply voltage.....	300 volts
Grid 3 voltage.....	25 volts
Grid 1 voltage, positive d-c.....	0 volts
Plate dissipation.....	1.5 watts
Grid 2 dissipation (for grid 2 volts up to 150 volts).....	1.0 watt
Grid 2 dissipation (for grid 2 volts between 150 and 300 volts).....	See Rating Chart in APPENDIX
Grid 1 circuit resistance.....	
Fixed bias.....	0.25 meg
Self bias.....	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate supply voltage.....	150 volts
Grid 3 (suppressor) supply voltage connected to cathode at socket.....	
Grid 2 supply voltage.....	100 volts
Cathode bias resistor.....	560 ohms
Plate resistance (approx.).....	0.15 meg
Transconductance.....	
Grid 1 to plate.....	800 μmhos
Grid 3 to plate.....	515 μmhos
Plate current.....	1.1 ma
Grid 2 current.....	2.1 ma
Grid 1 voltage (approx.) for I _b = 10 μa.....	-4.5 volts
Grid 3 voltage (approx.) for I _b = 10 μa.....	-3.5 volts

3DT6 (cont.)

Locked-Oscillator, Quadrature Grid F-M Detector (Carrier Frequency of 4.5 Mc)*

Input Signal to Grid of Driver	15	200	500mv rms
Plate supply voltage.....	250	250	250 volts
Grid 3 voltage (from 0.56 meg resistor)....	-5	-6	-6.4 volts
Grid 2 supply voltage.....	100	100	100 volts
Cathode-bias resistor.....	560	560	560 ohms
Plate load resistor.....	0.27	0.27	0.27 meg
Plate current.....	0.23	0.22	0.21 ma
Grid 2 current.....	3.4	5.5	6.0 ma
Grid 1 current.....	0.013	0.6	0.8 ma
Bandwidth (10% total harmonic distortion)	65	120	118 kc
A-m rejection (approx.)†.....	33	29	28 db
Audio output voltage, rms (approx.)			
With ± 7.5 kc deviation from mean value of 4.5 Mc.....	5.5	6.5	7.5 volts
With a ± 25 kc deviation from mean value of 4.5 Mc.....	17	21	23 volts
Total harmonic distortion			
With a ± 25 kc deviation from mean value of 4.5 Mc.....	2	3	4 %
Sensitivity			
With a ± 7.5 kc deviation from mean value of 4.5 Mc.....			5 mv Δ
With a ± 25 kc deviation from mean value of 4.5 Mc.....			15 mv Δ

NOTES:

*See diagram of typical circuit in Circuits section of APPENDIX.

†Ratio of audio output voltage produced by 30% amplitude modulation of the 4.5 Mc carrier frequency to the audio output produced by a ± 25 Kc deviation from the 4.5 Mc carrier frequency with a modulating frequency of 400 cps in both cases.

Δ Signal level at which detector circuit will handle the indicated deviation in frequency from the mean value of 4.5 Mc before distortion occurs.

3E5 • 3E6 • 3LE4 • 3LF4

(See chart for seldom-used tubes)



3Q4




Audio power amplifier for battery-powered receivers

FILAMENT CHARACTERISTICS

	Series	Parallel	
Voltage, d-c.....	2.8	1.4	volts
Current.....	50	100	ma

Type 3Q4 is identical to type 3V4 except for a different basing diagram. For an explanation of series/parallel filament connections see the notes for type 3V4.



CBS ELECTRON TUBES




3Q5GT



Audio power amplifier for use in portable battery-powered receivers

FILAMENT CHARACTERISTICS

	Series	Parallel*	
Voltage, d-c.....	2.8	1.4	volts
Current.....	50	100	ma



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.6	$\mu\mu\text{f}$
Input: g1 to f (center-tap) + b.p. + g2.....	8.0	$\mu\mu\text{f}$
Output: p to f (center-tap) + b.p. + g2.....	6.5	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

	Series Filament	Parallel Filament	
Plate voltage.....	110	110	volts
Grid 2 voltage.....	110	110	volts
Cathode current, zero signal.....	6	12	ma
Grid circuit resistance.....	1.0	1.0	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Series Filament		Parallel Filament		
		90	110	85	90
Plate voltage.....	90	110	85	90	110
Grid 2 (screen) voltage.....	90	110	85	90	110
Grid 1 (control-grid) voltage.....	-4.5	-6.6	-5.0	-4.5	-6.6
Plate resistance (approx.).....	0.08	0.11	0.07	0.09	0.1
Transconductance.....	2000	2000	1950	2200	2200
Grid 1 input voltage, peak a-f.....	4.5	5.1	5.0	4.5	5.4
Plate current.....	8.0	8.5	7.0	9.5	10.0
Grid 2 current, zero signal.....	1.0	1.1	0.8	1.3	1.4
Load resistance impedance.....	8000	8000	9000	8000	8000
Total harmonic distortion (approx.).....	8.5	8.5	5.5	6.0	6.0
Power output, maximum signal.....	230	330	250	270	400

NOTE:

*For parallel filament connection tie pins 2 and 7. Pin 8 connects to negative potential.




3S4



Audio power amplifier for use in portable battery-powered receivers

FILAMENT CHARACTERISTICS

	Series	Parallel*
Voltage, d-c	2.8	1.4 volts
Current	50	100 ma



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p	0.3	$\mu\mu\text{f}$
Input: g1 to f (center-tap) + g3 + g2	4.8	$\mu\mu\text{f}$
Output: p to f (center-tap) + g3 + g2	4.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

	Series Filament	Parallel Filament
Plate voltage	90	90 volts
Grid 2 voltage	67.5	67.5 volts
Cathode current, zero signal	4.5	9.0 ma
Cathode current, maximum signal	6.0	12.0 ma
Grid 1 circuit resistance		
Fixed bias		2.2 meg
Self bias		2.2 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Series Filament		Parallel Filament	
		67.5	90	67.5
Plate voltage	67.5	67.5	67.5	67.5 volts
Grid 2 (screen) voltage	-7	-7	-7	-7 volts
Grid 1 (control-grid) voltage	0.1	0.1	0.1	0.1 meg
Plate resistance (approx.)	1400	1425	1550	1575 μmhos
Transconductance	7	7	7	7 volts
Grid 1 input voltage, peak a-f.	6.0	6.1	7.2	7.4 ma
Plate current, zero signal	1.2	1.1	1.5	1.4 ma
Grid 2 current, zero signal	5000	8000	5000	8000 ohms
Load resistance impedance	12	13	10	12 %
Total harmonic distortion (approx.)	160	235	180	270 mw
Power output, maximum signal				

Typical Operation with Single Filament Section

Plate voltage	90 volts
Grid 2 (screen) voltage	67.5 volts
Grid 1 (control-grid) voltage	-7 volts
Plate resistance (approx.)	0.2 meg
Transconductance	800 μmhos
Grid 1 input voltage, peak a-f.	7 volts
Plate current, zero signal	3.7 ma
Grid 2 current, zero signal	0.7 ma
Load resistance	16,000 ohms
Total harmonic distortion (approx.)	12 %
Power output, maximum signal	145 mw

NOTE:

*For parallel filament connection tie pins 1 and 7. Pin 5 connects to negative potential.




3V4



Audio power amplifier for use in battery-powered receivers

HEATER CHARACTERISTICS

	Series	Parallel*
Voltage, d-c.....	2.8	1.4 volts
Current.....	50	100 ma



6BX

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.20	$\mu\mu\text{f}$
Input: g1 to f (center-tap) + g3 + g2.....	5.5	$\mu\mu\text{f}$
Output: p to f (center-tap) + g3 + g2.....	3.8	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

	Series Filament	Parallel Filament
Plate voltage.....	90	90 volts
Grid 2 voltage.....	90	90 volts
Grid 2 supply voltage.....	-4.5	-5.0 volts
Cathode current, maximum signal.....	6	12 ma
Cathode current, zero signal.....	6	12 ma
Grid circuit resistance		
Fixed bias.....	2.2	meg
Self bias.....	2.2	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Series	Parallel	
Plate voltage.....	90	85	90 volts
Grid 2 (screen) voltage.....	90	85	90 volts
Grid 1 (control-grid) voltage.....	-4.5	-5.0	-4.5 volts
Plate resistance (approx.).....	0.12	0.12	0.10 meg
Transconductance.....	2000	1975	2150 μmhos
Grid 1 input voltage, peak a-f.....	4.5	5.0	4.5 volts
Plate current, zero signal.....	7.7	6.9	9.5 ma
Grid 2 current, zero signal.....	1.7	1.5	2.1 ma
Load resistance impedance.....	10,000	10,000	10,000 ohms
Total harmonic distortion (approx.).....	7	10	7 %
Power output, maximum signal.....	0.24	0.25	0.27 mw

Typical Operation with Single Filament Section

Plate voltage.....	90 volts
Grid 2 (screen) voltage.....	90 volts
Grid 1 (control-grid) voltage.....	-4.5 volts
Plate resistance.....	0.2 meg
Transconductance.....	1100 μmhos
Grid-to-grid input voltage, peak a-f.....	4.5 volts
Plate current, zero signal.....	4.8 ma
Grid 2 current, zero signal.....	1.1 ma
Load resistance.....	20,000 ohms
Total harmonic distortion (approx.).....	7 %
Power output, maximum signal.....	135 mw

NOTE:

*For parallel connection tie pins 1 and 7. Connect pin 5 to negative potential.

4A6G

(See chart for seldom-used tubes)

CBS ELECTRON TUBES



4AU6




R-f amplifier, heater warm-up controlled

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 4.2 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater neg. to cathode... 200 volts
 Heater pos. to cathode*... 200 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.

Type 4AU6 is identical to types 3AU6, 6AU6 and 12AU6 except for heater characteristics. See type 3AU6 for ratings and operating characteristics.



4BA6




Pentode amplifier for gain controlled r-f or i-f stages, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 4.2 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater neg. to cathode... 200 volts
 Heater pos. to cathode*... 200 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.

Type 4BA6 is identical to types 3BA6, 6BA6 and 12BA6 except for heater characteristics. See type 3BA6 for ratings and operating characteristics.



4BC5




R-f amplifier, heater warm-up controlled

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 4.2 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater neg. to cathode... 200 volts
 Heater pos. to cathode*... 200 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.

Type 4BC5 is identical to types 3BC5 and 6BC5 except for heater characteristics. See type 3BC5 for ratings and operating characteristics.




CBS**4BC8**

Gain controlled vhf cascode amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	4.2 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode*.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 sec. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)	
*D-c component must not exceed 100 volts max.	

**ELECTRICAL DATA****DIRECT INTERELECTRODE CAPACITANCES—Shield†**

	Section 1†	Section 2†	
Grid to plate: g1 to p.....	1.4	1.4	$\mu\mu\text{f}$
Input: g1 to k + h.....	2.5	2.5	$\mu\mu\text{f}$
Output: p to k + h.....	1.3	1.3	$\mu\mu\text{f}$
Heater to cathode: h to k.....	2.3	2.3	$\mu\mu\text{f}$
Coupling: p1 to p2.....	0.015		$\mu\mu\text{f}$
Coupling: g1 to g2.....	0.007		$\mu\mu\text{f}$

‡JETEC shield 315 connected to cathode.

†Section 1 connects to pins 6, 7, and 8.

MAXIMUM RATINGS (Design center values)▲

Plate voltage*.....	250 volts
Plate dissipation.....	2 watts
Cathode current.....	20 ma
Control-grid circuit resistance.....	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION**Class A Amplifier▲**

Plate voltage.....	150 volts
Control-grid voltage.....	0 volts
Cathode-bias resistor.....	220 ohms
Transconductance.....	6200 μmhos
Amplification factor.....	35
Plate current.....	10 ma
Control-grid voltage (approx.) for $g_m = 50 \mu\text{mhos}$	-13 volts

NOTES:

▲Each section.

*This rating may be as high as 300 volts maximum under cutoff conditions when the tube is used as a cascode amplifier and the two sections are connected in series.




4BE6



Radio-frequency converter, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.2 volts
- Current..... 450 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 100 volts max.



Type 4BE6 is identical to types 3BE6 and 6BE6 except for heater characteristics. See type 3BE6 for ratings and operating characteristics.




4BN6



Gated beam tube for f-m discriminator, limiter, and audio amplifier service, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.2 volts
- Current..... 450 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 100 volts max.



Type 4BN6 is identical to types 3BN6 and 6BN6 except for heater characteristics. See type 3BN6 for ratings and operating characteristics.




4BQ7A



High-gain, low-noise vhf cascode amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.2 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
Heater negative to cathode*..... 200 volts
- Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 sec. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield

	Section 1†	Section 2‡	
Grid to plate: g1 to p.....	1.15	1.15	μμf
Input: g1 to k + h + i.s.....	2.85		μμf
Output: p to k + h + i.s.....	1.35		μμf
Plate to cathode: p to k, max.....	0.15	0.15	μμf
Heater to cathode: h to k.....	2.65	2.70	μμf
Coupling: p1 to p2, max.....	0.010		μμf
Coupling: p2 to p1 and g1, max.....	0.024		μμf
Grounded grid operation			
Input: k to h + g + i.s.....		4.95	μμf
Output: p to h + g + i.s.....		2.27	μμf

‡JETEC shield 315 connected to cathode.

†Section 1 connects to pins 6, 7, and 8.

MAXIMUM RATINGS (Design center values)▲

- Plate voltage*..... 250 volts
- Plate dissipation..... 2 watts
- Cathode current..... 20 ma
- Control-grid circuit resistance..... 0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier▲

- Plate voltage*..... 150 volts
- Cathode-bias resistor..... 220 ohms
- Plate resistance (approx.)..... 6100 ohms
- Transconductance..... 6400 μmhos
- Amplification factor..... 39
- Plate current..... 9 ma
- Control-grid voltage (approx.) for I_b = 10 μa..... -10 volts

Direct Coupled R-F Grounded Grid Operation‡

	Section 1†	Section 2‡	
Plate supply voltage.....	250	250	volts
Plate voltage.....	135	115	volts
Control-grid voltage.....	-1.0		volts
Cathode-bias resistor.....	100		ohms
Grid resistor.....		0.5	meg
Plate current.....	10	10	ma
Control-grid current.....	0	0	ma
Control-grid voltage (approx.) for I _b = 10 μa.....	-14		volts
Heater-cathode voltage			
Heater negative to cathode.....	1	125	volts

NOTES:

*Under cutoff conditions, in r-f grounded grid circuits with direct coupled drive, this voltage may be as high as 300 volts.

‡Section 1 connects to pins 6, 7, and 8. Section 2 connects to pins 1, 2, and 3.

▲Each section.

‡Section 1 (driver) is directly coupled to Section 2 (driven grounded-grid amplifier).




4BS8



Low-noise vhf cascode amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	4.2 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield†

	Section 1†	Section 2‡	
Grid to plate: g1 to p.....	1.15	1.15	$\mu\mu\text{f}$
Input: g1 to k + h + i.s.....	2.60		$\mu\mu\text{f}$
Output: p to k + h + i.s.....	1.35		$\mu\mu\text{f}$
Plate to cathode: p to k.....	0.15	0.15 max.	$\mu\mu\text{f}$
Heater to cathode: h to k.....	2.60	2.70	$\mu\mu\text{f}$
Plate (Sect. 1) to plate (Sect. 2).....	0.010 max.		$\mu\mu\text{f}$
Plate (Sect. 2) to plate and grid (Sect. 1).....	0.024 max.		$\mu\mu\text{f}$
Grounded grid operation			
Input.....	4.95		$\mu\mu\text{f}$
Output.....	2.27		$\mu\mu\text{f}$

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	150 volts
Plate dissipation.....	2.0 watts
Cathode current.....	20 ma
Control-grid circuit resistance*.....	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	150 volts
Cathode-bias resistor.....	220 ohms
Plate resistance (approx.).....	5000 ohms
Transconductance.....	7200 μmhos
Amplification factor.....	36
Plate current.....	10 ma
Control-grid voltage (approx.) for $I_b = 10 \mu\text{a}$	7 volts

Cascode Operation

Plate supply voltage.....	250 volts
Control-grid voltage.....	-1.0 volt
Transconductance.....	10,000 μmhos
Plate current.....	16 ma
Control-grid voltage (approx.) for $I_b = 10 \mu\text{a}$	6.0 volt

NOTES:

*Each unit. †Section 2 only.

‡Section 1 connects to pins 6, 7, and 8. Section 2 connects to pins 1, 2, and 3.

CBS


4BU8



**Combined sync and agc tube for television receivers,
heater warm-up time controlled for series strings**

HEATER CHARACTERISTICS


Voltage, a-c or d-c.....	4.2 volts
Current.....	450 ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average (See Series-String Heaters section of APPENDIX in CBS Tube Manual).
*D-c component must not exceed 100 volts max.	



Type 4BU8 is identical to types 3BU8 and 6BU8 except for heater characteristics. See type 3BU8 for ratings and operating characteristics.




4BX8



Vhf cascode amplifier in TV receivers having low supply voltages, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.5 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
Heater negative to cathode..... 200 volts
- Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield↕

	Section 1	Section 2	
Grid to plate: g1 to p.....	1.4	1.4	μμf
Plate to cathode: p to k.....	.165	.165	μμf
Input: g to h + k + i.s.....		2.4	μμf
Input: k to h + g + i.s.♦♦.....	4.9		μμf
Output: p to k + h + i.s.....		1.25	μμf
Output: p to h + g + i.s.♦♦.....	2.6		μμf

↕JETEC shield 315 connected to pin 9.
♦♦Read as grounded grid amplifier.

MAXIMUM RATINGS (Design maximum values)

Plate voltage.....	150 volts
Plate dissipation (each plate).....	2.0 watts
Cathode current.....	20 ma
Control-grid circuit resistance.....	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

	Cascode Amplifier	Class A Amplifier	
Plate voltage.....		65 volts	
Plate supply voltage.....	125		volts
Control-grid voltage.....	-0.5	-1.0	volts
Transconductance.....	7500		μmhos
Amplification factor.....		25	
Plate current.....	11.0	9.0	ma
Control-grid voltage (approx.) for $I_b = 10 \mu a$		-7.0	volts



4BZ7




High-gain, low-noise cascode amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.2 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode*..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 sec. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield†

	Section 1†	Section 2†
Grid to plate: g1 to p.....	1.2	1.2 $\mu\mu\text{f}$
Input: g1 to k + h + i.s.....	2.6	$\mu\mu\text{f}$
Output: p to k + h + i.s.....	1.2	$\mu\mu\text{f}$
Plate to cathode: p to k.....	0.12	0.12 $\mu\mu\text{f}$
Heater to cathode: h to k.....	2.6	2.7 $\mu\mu\text{f}$
Coupling: p1 to p2.....	0.010	$\mu\mu\text{f}$
Coupling: p2 to p1 + g1, max.....	0.024	$\mu\mu\text{f}$
Grounded grid operation		
Input: k to h + g + i.s.....		5.0 $\mu\mu\text{f}$
Output: p to h + g + i.s.....		2.2 $\mu\mu\text{f}$

‡JETEC shield 315 connected to cathode.

†Section 1 connects to pins 6, 7, and 8.

MAXIMUM RATINGS (Design center values)▲

- Plate voltage*..... 250 volts
- Plate dissipation..... 2 watts
- Cathode current..... 20 ma
- Control-grid circuit resistance..... 0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier▲

- Plate voltage..... 150 volts
- Cathode-bias resistor..... 220 ohms
- Plate resistance (approx.)..... 5300 ohms
- Transconductance..... 6800 μmhos
- Amplification factor..... 36
- Plate current..... 10 ma
- Control-grid voltage (approx.) for $I_b = 100 \mu\text{a}$ -7 volts

NOTE:

▲Each section.


*Under cut-off conditions, in r f grounded circuits with direct coupled drive, the voltage may be as high as 300 volts.

CBS**4BZ8**

**Gain-controlled low-noise vhf cascode amplifier,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	4.2 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).	

**ELECTRICAL DATA****DIRECT INTERELECTRODE CAPACITANCES—Shield†**

	Section 1†	Section 2†	
Grid to plate: g1 to p.....	1.15		$\mu\mu\text{f}$
Output: p to k + h.....		0.15	$\mu\mu\text{f}$
Plate (Sect. 1) to plate (Sect. 2).....	0.10		$\mu\mu\text{f}$

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	250 volts
Plate dissipation.....	2.2 watts
Cathode current.....	20 ma
Control-grid circuit resistance.....	0.1 meg

CHARACTERISTICS AND TYPICAL OPERATION**Class A Amplifier (Each Section)**

Plate voltage.....	125 volts
Cathode-bias resistor.....	100 ohms
Plate resistance (approx.).....	5600 ohms
Transconductance.....	8000 μmhos
Transconductance, cascode ($E_b = 250\text{V}$, $E_{c1} = -0.5\text{V}$).....	10,000 μmhos
Amplification factor.....	45
Plate current.....	10 ma
Cascode plate current ($E_b = 250\text{V}$, $E_{c1} = -0.5\text{V}$).....	15 ma
Control-grid voltage (approx.) for $g_m = 50 \mu\text{mhos}$	-13 volts

NOTES:


†Section 1 connects to pins 6, 7, and 8. Section 2 connects to pins 1, 2, and 3.

**4CB6**

**Pentode amplifier for r-f or i-f service, heater
warm-up time controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	4.2 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	300 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).	



*D-c component must not exceed 100 volts max.

Type 4CB6 is identical to types 3CB6 and 6CB6 except for heater characteristics. See type 3CB6 for ratings and operating characteristics.

CBS ELECTRON TUBES




4CX7



Low-noise vhf cascode amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c. 4.2 volts
- Current 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode† 200 volts
 - Heater positive to cathode* 200 volts
- Warm-up time 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield‡

	Section 1‡	Section 2‡
Grid to plate: g1 to p.	1.2	$\mu\mu f$
Input: g1 to k + h.	2.4	$\mu\mu f$
Output: p to k + h.	1.3	$\mu\mu f$
Heater to cathode: h to k▲.	2.4	2.2 $\mu\mu f$
Plate to cathode: p to k, max.	0.17	0.17 $\mu\mu f$
Plate (Sect. 2) to plate and grid (Sect. 1), max.	0.27	$\mu\mu f$
Plate (Sect. 1) to plate (Sect. 2), max.	0.17	$\mu\mu f$
Grounded grid operation		
Input: k to g + h + i.s.		4.2 $\mu\mu f$
Output: p to g + h + i.s.		1.7 $\mu\mu f$

‡JETEC shield 315 connected to heater unless otherwise specified.
▲JETEC shield 315 connected to ground.

MAXIMUM RATINGS (Design center values) (Each section)

- Plate voltage†. 250 volts
- Plate dissipation. 2.0 watts
- Cathode current. 20 ma
- Control-grid circuit resistance. 0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier (Each section)

- Plate voltage. 150 volts
- Control-grid voltage. 0 volts
- Cathode-bias resistor. 220 ohms
- Transconductance. 6400 $\mu mhos$
- Amplification factor. 39
- Plate current. 9.0 ma
- Control-grid voltage (approx.) for $I_b = 10 \mu a$ -10 volts

NOTES:

- †Under cutoff conditions when the tube is used as a cascode amplifier, this rating may be as high as 300 volts maximum.
- ‡Section 1 connects to pins 6, 7, 8, and 9. Section 2 connects to pins 1, 2, and 3.



5AM8




High-gain i-f amplifier and video detector, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c. 4.7 volts
 Current 600 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode 200 volts
 Heater positive to cathode* 200 volts
 Warm-up time 11 sec. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Pentode	No Shield	Shield†	
Grid to plate: g1 to p, max.	0.015	0.015	μμf
Input: g1 to k + h + g2 + g3	6.0	6.0	μμf
Output: p to k + h + g2 + g3	2.6	3.4	μμf
Diode			
Input: p to k + h	1.7	2.3	μμf
Cathode to heater and plate: k to h + p	3.0	3.0	μμf
Coupling: diode plate to pentode plate	0.10	0.035	μμf
Coupling: diode plate to pentode grid 1	0.006	0.005	μμf
Coupling: diode cathode to pentode plate	0.15	0.15	μμf

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage	300 volts
Grid 2 voltage	See Rating Chart in APPENDIX
Grid 2 supply voltage	300 volts
Grid 1 voltage, positive d-c	0 volts
Grid 3 voltage	0 volts
Plate dissipation	2.8 watts
Grid 2 dissipation	0.5 watt
Grid 1 circuit resistance	
Fixed bias	0.25 meg
Cathode bias	1.0 meg
Diode current for continuous operation	5.0 ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier


Plate voltage	200 volts
Grid 3 (suppressor) voltage	0 volts
Grid 2 (screen) voltage	150 volts
Cathode bias resistor	120 ohms
Plate resistance (approx.)	0.6 meg
Transconductance	7000 μmhos
Plate current	11.5 ma
Grid 2 current	2.7 ma
Grid 1 voltage (approx.) for I _b = 10μa	-8 volts
Diode plate voltage for diode current = 50 ma*	10 volts

NOTE:

*Test conditions only—Operating conditions must not exceed the design center rating.



5AN8




Sync clipper, sync separator, etc. and i-f or video amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.7 volts
- Current..... 600 ma
- Peak heater-cathode voltage max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode..... 200 volts
- Warm-up time..... 11 sec. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

- Grid to plate: g1 to p..... 1.5 $\mu\mu\text{f}$
- Input: g1 to k + h..... 2.0 $\mu\mu\text{f}$
- Output: p to k + h..... 0.27 $\mu\mu\text{f}$

Pentode Section

- Grid to plate: g1 to p, max..... 0.04 $\mu\mu\text{f}$
- Input: g1 to k + h + g2 + g3..... 7.0 $\mu\mu\text{f}$
- Output: p to k + h + g2 + g3..... 2.3 $\mu\mu\text{f}$
- Coupling: pentode grid 1 to triode plate..... 0.006 $\mu\mu\text{f}$
- Coupling: pentode plate to triode grid..... 0.005 $\mu\mu\text{f}$
- Coupling: pentode plate to triode plate..... 0.045 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....	300 volts	
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.6	2.0 watts
Grid 2 dissipation.....	0.5 watt	
Grid 1 circuit resistance*		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

	Triode	Pentode
Plate supply voltage.....	200	200 volts
Grid 2 (screen) supply voltage.....	150 volts	
Grid 1 (control-grid) voltage.....	-6	volts
Cathode-bias resistor.....	180 ohms	
Plate resistance (approx.).....	.00575	0.30 meg
Transconductance.....	3300	6200 μmhos
Amplification factor.....	19	
Plate current.....	13	9.5 ma
Grid 2 current.....	2.8 ma	
Grid 1 voltage (approx.) for $I_b = 10\mu\text{a}$	-19	-8 volts

NOTE:

*If either unit is operating at maximum rated conditions, Grid 1 circuit resistance for both units should not exceed the values given.



5AQ5




Audio power amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c 4.7 volts
 Current..... 600 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode 200 volts
 Heater positive to cathode*..... 200 volts
 Warm-up time 11 sec. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p..... 0.4 $\mu\mu\text{f}$
 Input: g1 to k + h + g2 + b.p..... 8.0 $\mu\mu\text{f}$
 Output: p to k + h + g2 + b.p..... 8.5 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

	Class A Amplifier	Vertical Deflection Amplifier *Triode Connected†
Plate voltage.....	250	250 volts
Plate voltage, peak positive pulse (absolute max.).....		1100 volts
Grid 2 voltage.....	250	volts
Grid voltage, peak negative.....		250 volts
Plate dissipation.....	12	9▲ watts
Grid 2 dissipation.....	2	watts
Grid 1 circuit resistance		
Fixed bias.....	0.1	meg
Self bias.....	0.5	2.2 meg
Bulb temperature at hottest point.....	250	250 °C

CHARACTERISTICS AND TYPICAL OPERATION

	Class A Amplifier	Vertical Deflection Amplifier *Triode Connected†
Plate voltage.....	180	250 volts
Grid 2 (screen) voltage.....	180	250 volts
Grid 1 (control-grid) voltage.....	-8.5	-12.5 volts
Plate resistance (approx.).....	58,000	52,000 ohms
Transconductance.....	3700	4100 μmhos
Grid 1 input voltage, peak a-f.....	8.5	12.5 volts
Plate current, zero signal.....	29	45 ma
Plate current, maximum signal.....	30	47 ma
Grid 2 current, zero signal.....	3.0	4.5 ma
Grid 2 current, maximum signal.....	4.0	7.0 ma
Load resistance impedance.....	5500	5000 ohms
Total harmonic distortion (approx.).....	8	8 %
Power output, maximum signal.....	2.0	4.5 watts

5AQ5 (cont.)

Class AB Amplifier (Two tube values unless noted)

Plate voltage.....	250	volts
Grid 2 (screen) voltage.....	250	volts
Grid 1 (control-grid) voltage.....	-15	volts
Plate resistance, per tube.....	60,000	ohms
Transconductance, per tube.....	3750	μmhos
Grid-to-grid input voltage, peak a-f.....	30	volts
Plate current, zero signal.....	70	ma
Plate current, maximum signal.....	79	ma
Grid 2 current, zero signal.....	5	ma
Grid 2 current, maximum signal.....	13	ma
Load resistance, plate-to-plate.....	10,000	ohms
Total harmonic distortion (approx.).....	5	%
Power output, maximum signal.....	10	watts

Triode Connected

Plate and grid 2 voltage (p + g2 tied together).....	250	volts
Grid 1 voltage.....	-12.5	volts
Plate resistance (approx.).....	1970	ohms
Amplification factor.....	9.5	
Transconductance.....	4800	μmhos
Plate current.....	49.5	ma
Grid 1 voltage (approx.) for $I_b = 0.5$ ma.....	37	volts

NOTES:

*Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.

†With screen tied to plate.

▲Tube protection is needed for no-drive conditions if grid resistor bias is used.



5AS4
5AS4A




**High-vacuum full-wave power rectifier
with high d-c current output**

FILAMENT CHARACTERISTICS

Voltage, a-c.....	5.0	volts
Current.....	3.0	amp

Types 5AS4 and 5AS4A are identical to type 5U4GB except for type of glass envelope and type of octal base.



CBS ELECTRON TUBES




5AS8



Detector—video, i-f, or agc amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c. 4.7 volts
- Current. 600 ma
- Peak heater-cathode voltage, max.
Heater negative to cathode. 200 volts
- Heater positive to cathode*. 200 volts
- Warm-up time. 11 sec. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Pentode

- Grid to plate: g1 to p, max. 0.02 $\mu\mu\text{f}$
- Input: g1 to k + h + g2 + g3. 7.0 $\mu\mu\text{f}$
- Output: p to k + h + g2 + g3. 2.2 $\mu\mu\text{f}$
- Pentode grid to diode plate, max. 0.005 $\mu\mu\text{f}$
- Pentode plate to diode cathode, max. 0.15 $\mu\mu\text{f}$
- Pentode plate to diode plate, max. 0.10 $\mu\mu\text{f}$

Diode

- Output: p to k + h + i.s. 3.0 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Pentode Unit

- Plate voltage. 300 volts
- Grid 3 (suppressor) voltage. 0 volts
- Grid 2 voltage. See Rating Chart in APPENDIX
- Grid 2 supply voltage. 300 volts
- Grid 1 voltage, positive d-c. 0 volts
- Plate dissipation. 2.5 watts
- Grid 2 dissipation. 0.5 watt
- Grid 1 circuit resistance
Fixed bias. 0.25 meg
- Self bias. 1.0 meg

Diode Unit

- Peak inverse plate voltage. 330 volts
- Peak plate current. 50 ma
- D-c plate current. 5 ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

- Plate supply voltage. 200 volts
- Grid 3 (suppressor). connected to cathode at socket
- Grid 2 supply voltage. 150 volts
- Cathode bias resistor. 180 ohms
- Plate resistance (approx.). 0.3 meg
- Transconductance. 6200 μmhos
- Plate current. 9.5 ma
- Grid 2 current. 3.0 ma
- Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$ -8.0 volts




5AT8



Vhf oscillator and mixer, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.7 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 100 volts
 - Heater positive to cathode*..... 100 volts
- Warm-up time..... 11 sec. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	Shield†	No Shield	
Grid to plate: g1 to p.....	1.5	1.5	μμf
Input: g1 to k + h.....	2.4	2.0	μμf
Output: p to k + h.....	1.0	0.5	μμf

Pentode Section

Grid to plate: g1 to p, max.....	0.016	0.025	μμf
Input: g1 to k + h + g2 + g3.....	4.7	4.5	μμf
Output: p to k + h + g2 + g3.....	1.6	0.9	μμf
Coupling: pentode grid 1 to triode plate.....	0.04	0.05	μμf
Coupling: heater to cathode.....	6.5*	6.5	μμf
Coupling: pentode plate to triode plate.....	0.007	0.05	μμf

Pentode connected as triode▲

Grid 1 to plate: g1 to p.....	1.3	1.3	μμf
Input: g1 to k + h.....	3.3	3.0	μμf
Output: p to k + h.....	2.5	1.7	μμf

†JETEC shield 315 connected to cathode.

*JETEC shield 315 connected to ground.

▲Grid 3 connected to cathode, and grid 2 connected to plate.

MAXIMUM RATINGS (Design center values)

Converter Service	Pentode as		
	Triode Mixer†	Triode Osc.	Pentode Mixer
Plate voltage.....	250	250	250 volts
Grid 3 voltage.....			0 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX		
Grid 2 supply voltage.....			250 volts
Grid 1 voltage, positive d-c.....	0	0	0 volts
Grid 1 voltage, negative d-c.....	40	40	40 volts
Plate dissipation.....	2.4	1.5	2.0 watts
Grid 2 dissipation.....			0.4 watt
Grid 1 dissipation.....		0.5	watt
Cathode current.....			ma
Grid 1 circuit resistance			
Fixed bias.....		0.1	0.1 meg
Self bias.....		0.5	0.5 meg

CBS ELECTRON TUBES

5AT8 (cont.)

CHARACTERISTICS Class A Amplifier	Pentode	Triode	Pentode
	Triode Connected		connected to cathode at socket
Plate voltage.....	150	100	250 volts
Grid 3 (suppressor).....	connected to cathode at socket		
Grid 2 (screen) voltage..	connected to plate		150 volts
Cathode-bias resistor.....	250	100	200 ohms
Plate resistance (approx.)	0.0079	0.0069	0.75 meg
Transconductance.....	4000	5800	4600 μ mhos
Amplification factor.....	42	40	
Plate current.....	7.8	8.5	7.7 ma
Grid 2 current.....			1.6 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-10	-10	-10 volts

TYPICAL OPERATION	Triode as	Pentode
	250 mc Osc. †	Mixer‡
Plate voltage.....	150	150 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....		150 volts
Mixer grid 1 supply voltage.....		-3.5 volts
Oscillator voltage, rms at mixer grid 1.....		2.6 volts
Mixer grid 1 circuit resistance.....		0.12 meg
Oscillator grid resistor.....	2700	ohms
Conversion transconductance.....		2100 μ mhos
Plate current.....	13	6.2 ma
Grid 2 current.....		1.8 ma
Grid 1 current.....		2.0 μ a
Oscillator power output.....	0.5	watt

	Pentode Unit as Triode- Connected Mixer
Plate voltage.....	150 volts
Grid 1 supply voltage.....	-3.5 volts
Oscillator voltage, rms at grid 1.....	2.6 volts
Grid 1 circuit resistance.....	0.12 meg
Conversion transconductance.....	2800 μ mhos
Plate current.....	7.8 ma
Grid 1 current.....	2.0 μ a

NOTES:

- †Grid 3 connected to cathode, grid 2 connected to plate.
- ‡With separate excitation and triode unit grounded.
- §In TV or FM receivers it is generally desirable to operate the oscillator with less power input than given in the tabulated data in order to avoid over-excitation and excessive oscillator radiation.

5AU4

(See chart for seldom-used tubes)




5AV8



Sync separator or sync clipper, etc. and i-f or video amplifier with heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	4.7 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 sec. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).	
*D-c component must not exceed 100 volts max.	



DIRECT INTERELECTRODE CAPACITANCES

Triode output: p to k + h.....	0.34 $\mu\mu\text{f}$
Pentode output: p to k + h + g2 + g3.....	3.0 $\mu\mu\text{f}$

Type 5AV8 is identical to type 5AN8 except for a different basing diagram and output capacitances. Type 5AV8 uses basing diagram 9DZ.




5AW4



High-vacuum, full-wave power rectifier

FILAMENT CHARACTERISTICS

Voltage, a-c or d-c.....	5.0 volts
Current.....	3.7 amp



5AW4 (cont.)

ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Rectifier Service

Plate voltage, peak inverse	1550	volts
Plate supply voltage, rms (each plate)‡		
Output current, d-c.	RATING CHART I*	550 volts
Plate current, peak steady state (each plate)	RATING CHART I*	
Plate current, peak transient (each plate)	RATING CHART II*	.75 amp
	RATING CHART III*	4.0 amp

CHARACTERISTICS

Tube Voltage Drop

Conducting 250 ma (each plate)	46	volts
--------------------------------------	----	-------

TYPICAL OPERATION

Full-Wave Rectifier (Capacitor Input Filter)

Plate supply voltage, rms (each plate)‡	450	volts
Plate supply resistance (each plate)	153	ohms
Filter input capacitor	10	μf
Output current, d-c.	250	ma
Output voltage at filter input, d-c.	422	volts

TYPICAL OPERATION

Full-Wave Rectifier (Choke Input Filter)

Plate supply voltage, rms (each plate)‡	550	volts
Filter input choke	10	henrys
Output current, d-c.	250	ma

NOTES:

*Rating Charts given in APPENDIX of CBS Tube Manual.

‡The indicated value of a-c plate supply voltage is measured without load.

5AX4GT • 5AZ4

(See chart for seldom-used tubes)



5B8




Sync clipper, sync separator, etc. and i-f or video amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.7 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

- Grid to plate: g1 to p..... 1.7 $\mu\mu\text{f}$
- Input: g1 to k + h + i.s. and pentode g3..... 1.9 $\mu\mu\text{f}$
- Output: p to k + h + i.s. and pentode g3..... 1.4 $\mu\mu\text{f}$

Pentode Section

- Grid to plate: g1 to p, max..... .032 $\mu\mu\text{f}$
- Input: g1 to k + h + g2..... 6.0 $\mu\mu\text{f}$
- Output: p to k + h + g2 + g3 and triode k..... 2.6 $\mu\mu\text{f}$
- Plate to cathode: p to k + g2 + h..... .15 $\mu\mu\text{f}$
- Coupling: pentode grid 1 to triode plate..... .0033 $\mu\mu\text{f}$
- Coupling: pentode plate to triode grid..... .0078 $\mu\mu\text{f}$
- Coupling: pentode plate to triode plate..... .060 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....	300 volts	
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.6	2.0 watts
Grid 2 dissipation.....		0.5 watt
Grid 1 circuit resistance*		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

	Triode	Pentode
Plate supply voltage.....	200	200 volts
Grid 2 (screen) supply voltage.....		150 volts
Grid 1 (control-grid) voltage.....	-6	volts
Cathode-bias resistor.....		180 ohms
Plate resistance (approx.).....	.00575	0.30 meg
Transconductance.....	3300	6200 μmhos
Amplification factor.....	19	
Plate current.....	13	9.5 ma
Grid 2 current.....		2.8 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-19	-8 volts

NOTE:

*If either unit is operating at maximum rated conditions, Grid 1 circuit resistance for both units should not exceed the values given.



5BE8




Triode-pentode for use as a vhf oscillator and mixer, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 4.7 volts
 Current..... 600 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

Grid to plate: g1 to p..... 1.8 $\mu\mu\text{f}$
 Input: g1 to k + h + pentode g3 + i.s..... 2.8 $\mu\mu\text{f}$
 Output: p to k + h + pentode g3 + i.s..... 1.5 $\mu\mu\text{f}$

Pentode Section

Grid to plate: g1 to p, max..... .040 $\mu\mu\text{f}$
 Input: g1 to k + h + g2..... 4.4 $\mu\mu\text{f}$
 Output: p to k + h + g2 + g3 + triode k + i.s..... 2.6 $\mu\mu\text{f}$
 Plate to k + h + g2..... .30 $\mu\mu\text{f}$
 Coupling: pentode grid 1 to triode plate..... .009 $\mu\mu\text{f}$
 Coupling: triode grid to pentode plate..... .010 $\mu\mu\text{f}$
 Coupling: triode plate to pentode plate..... .065 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....	300 volts	
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.5	2.8 watts
Grid 2 dissipation.....	0.5 watt	
Grid 1 circuit resistance†		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

	Triode	Pentode
Plate voltage.....	150	250 volts
Grid 2 (screen) voltage.....	110 volts	
Grid 1 (control-grid) voltage.....	0	0 volts
Cathode-bias resistor.....	56	68 ohms
Plate resistance (approx.).....	.005	0.4 meg
Transconductance.....	8500	5200 μmhos
Amplification factor.....	40	
Plate current.....	18	10 ma
Grid 2 current.....	3.5 ma	
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-12	-10 volts

NOTES:

†Stated values should not be exceeded when either section is operating at maximum rated conditions.

‡When reading characteristics of pentode section all triode elements shall be at ground potential. Thus, because of internal connections to pin No. 3, the pentode suppressor will also be at ground.

CBS ELECTRON TUBES




5BK7A



Vhf duotriode for cascode amplifier service,
heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.7 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
Heater negative to cathode†..... 200 volts
- Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2	
Grid to plate: g1 to p.....	1.8	1.8	$\mu\mu\text{f}$
Input: g1 to k + h + i.s.....	3.0	3.0	$\mu\mu\text{f}$
Output: p to k + h + i.s.....	1.0	0.9	$\mu\mu\text{f}$
Heater to cathode : h to k.....	2.8	3.0	$\mu\mu\text{f}$
Grid 1 to grid 1: g1 to g1, max.....	0.004		$\mu\mu\text{f}$
Plate to plate: p to p, max.....	0.075		$\mu\mu\text{f}$
Plate to cathode: p to k.....	0.22	0.22	$\mu\mu\text{f}$
Grounded-grid input.....	6.0	6.0	$\mu\mu\text{f}$
Grounded-grid output.....	2.4	2.4	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values):

- Plate voltage..... 300 volts
- Control-grid voltage, negative d-c..... 50 volts
- Plate dissipation..... 2.7 watts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier ‡

- Plate voltage..... 150 volts
- Cathode-bias resistor..... 56 ohms
- Plate resistance (approx.)..... 4600 ohms
- Transconductance..... 9300 μmhos
- Amplification factor..... 43
- Plate current..... 18 ma
- Control-grid voltage (approx.) for $I_b = 10 \mu\text{a}$ -11 volts
- Noise figure▲..... 7 db

NOTES:

†Used as a cascode amplifier with the two sections series-connected, this voltage may be as high as 300 volts maximum under cutoff conditions.

‡Each section.

▲As measured in a cascode amplifier with a balanced 300-ohm input system which operates at a plate supply of 250 volts, plate current of 18 ma, a frequency of 200 mc, a stage bandwidth of 7 mc, and an effective noise bandwidth of 3.5 mc.



5BQ7A



High-gain, low-noise vhf cascode amplifier


HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 5.6 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater neg. to cathode†.. 200 volts
 Heater pos. to cathode*.. 200 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.

†When used as a cascode amplifier, with the two sections series-connected, this voltage may be as high as 300 volts at cutoff conditions.

Type 5BQ7A is identical to types 4BQ7A and 6BQ7A except for heater characteristics. See type 4BQ7A for ratings and operating characteristics.



5BR8




Vhf local oscillator and mixer for fm and TV receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 4.7 volts
 Current..... 600 ma
 Peak heater-cathode voltage, max.
 Heater neg. to cathode... 250 volts
 Heater pos. to cathode*.. 200 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Triode Section			
Grid to plate: g1 to p.....	1.8	1.8	μμf
Input: p1 to k + h.....	2.5	2.5	μμf
Output: p to k + h.....	0.4	1.0	μμf
Cathode to heater (either section).....	3.0	3.0	μμf
Pentode Section			
Grid to plate: g1 to p.....	0.015	0.008	μμf
Input: g1 to k + h + g2 + g3 + i.s.....	5.0	5.0	μμf
Output: p to k + h + g2 + g3 + i.s.....	2.6	3.5	μμf

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....		300 volts
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.7	2.8 watts
Grid 2 dissipation.....		0.5 watt

CHARACTERISTICS AND TYPICAL OPERATION

	Triode	Pentode
Plate voltage.....	150	250 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) supply voltage.....		110 volts
Cathode-bias resistor.....	56	68 ohms
Plate resistance (approx.).....	.005	.40 meg
Transconductance.....	8500	5200 μmhos
Amplification factor.....	40	
Plate current.....	18	10 ma
Grid 2 current.....		3.5 ma
Grid 1 voltage (approx.) for I _b = 10 μa.....	-12	-10 volts

CBS ELECTRON TUBES




5CG8



Vhf oscillator and mixer, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	4.7	volts
Current.....	600	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11	secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)		
*D-c component must not exceed 100 volts max.		



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	No Shield	Shield [†]	
Grid to plate: g1 to p, max.....	1.5	1.5	μμf
Input: g1 to k + h.....	2.6	3.0	μμf
Output: p to k + h.....	0.05	1.0	μμf
Pentode Section			
Grid to plate: g1 to p.....	0.03	0.016	μμf
Input: g1 to k + h + g2 + g3.....	4.8	5.0	μμf
Output: p to k + h + g2 + g3.....	0.9	1.6	μμf
Coupling: pentode grid 1 to triode plate, max.....	0.04	0.05	μμf
Coupling: pentode plate to triode plate, max.....	0.007	0.05	μμf
Heater to cathode: h to k.....	5.5	5.5*	μμf

†JETEC shield 315 connected to cathode.

*JETEC shield 315 connected to ground.

MAXIMUM RATINGS (Design center values)

Converter Service	Triode as Oscillator	Pentode as Mixer
Plate voltage.....	250	250 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....	250 volts	
Grid 1 voltage, positive d-c.....	0	0 volts
Grid 1 voltage, negative d-c.....	40	40 volts
Plate dissipation.....	1.5	2 watts
Grid 2 dissipation†.....	0.5 watt	
Grid 2 dissipation‡.....	See Rating Chart in APPENDIX	
Grid 1 dissipation.....	0.5	watt
Grid 1 circuit resistance		
Fixed bias.....	0.1 meg	
Self bias.....	0.5 meg	

CHARACTERISTICS

	Triode	Pentode
Plate voltage.....	100	250 volts
Grid 2 (screen) voltage.....	150 volts	
Cathode-bias resistor.....	100	200 ohms
Plate resistance (approx.).....	6900	750,000 ohms
Transconductance.....	5800	4600 μmhos
Amplification factor.....	40	
Plate current.....	8.5	7.7 ma
Grid 2 current.....	1.6 ma	
Grid 1 voltage (approx.) for I _b = 10 μa.....	-10	-10 volts

CBS ELECTRON TUBES

5CG8 (cont.)

TYPICAL OPERATION	Triode as 250 mc Oscillator ^Δ	Pentode as Mixer [∇]
Plate voltage.....	150	150 volts
Grid 2 (screen) voltage.....		150 volts
Mixer grid 1 supply voltage.....		-3.5 volts
Oscillator voltage (rms) at mixer grid 1.....		2.6 volts
Mixer grid 1 (control grid) circuit resistance.....	120,000	ohms
Oscillator grid resistance.....	2700	ohms
Conversion transconductance.....		2100 μmhos
Plate current.....	13	6.2 ma
Grid 2 (screen) current.....		1.8 ma
Grid 1 (control grid) current.....	3.6	ma
Grid 1 (control grid) current.....		2 μa
Oscillator power output (approx.).....	0.5	watt

NOTES:

†For grid 2 voltages up to 150 volts.

‡For grid 2 voltages between 150 and 300 volts.

▲In TV and f-m receivers, it is generally desirable to operate the oscillator with less power input than shown in the tabulated data to avoid over-excitation and excessive oscillator radiation.

∇With separate excitation and triode unit grounded.



5CL8




Vhf oscillator and mixer, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	4.7 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)	

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	No Shield	Shield [♦]	
Grid to plate: g1 to p.....	1.8	1.8	μμf
Input: g1 to k + h.....	2.7	2.7	μμf
Output: p to k + h.....	0.4	1.2	μμf
Heater to cathode: h to k.....	2.5	2.5	μμf
Tetrode Section			
Grid to plate: g1 to p, max.....	.028	.016	μμf
Input: g1 to k + h + g2.....	5.0	5.0	μμf
Output: p to k + h + g2.....	2.0	3.0	μμf
Heater to cathode: h to k.....	2.5	2.5	μμf

♦JETEC shield 315 connected to cathode.

CBS ELECTRON TUBES

5CL8 (cont.)

MAXIMUM RATINGS (Design center values)

	Triode	Tetrode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....		300 volts
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.7	2.8 watts
Grid 2 dissipation.....		0.5 watt
Grid 1 circuit resistance		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode	Tetrode
Plate voltage.....	125	125 volts
Grid 2 (screen) voltage.....		125 volts
Grid 1 (control-grid) voltage.....	0	-1.0 volts
Cathode-bias resistor.....	56	ohms
Plate resistance (approx.).....	.005	0.1 meg
Transconductance.....	8000	5800 μ mhos
Amplification factor.....	40	
Plate current.....	15	12 ma
Grid 2 current.....		4.0 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-9	-10 volts



5CM6




General purpose audio power amplifier or vertical deflection amplifier in TV receivers, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.7 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

- Grid to plate: g1 to p..... 0.7 $\mu\mu\text{f}$
- Input: g1 to k + h + g2 + b.p..... 8.0 $\mu\mu\text{f}$
- Output: p to k + h + g2 + b.p..... 8.5 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

	Vertical Deflection Amplifier*		
	Class A Amplifier	Pentode	Triode†
Plate voltage.....	315	315	315 volts
Plate voltage, peak pos. (absolute max.)...	2000	2000	2000 volts
Grid 2 voltage.....	285	285	285 volts
Grid 1 voltage, peak negative.....	250	250	250 volts
Plate dissipation†.....	12	8	9 watts
Grid 2 dissipation.....	2.0	1.75	1.75 watts
Cathode current, average.....	40	40	40 ma
Cathode current, peak.....	120	120	120 ma
Grid 1 circuit resistance			
Fixed bias.....	0.1		0.1 meg
Self bias.....	0.5	2.2	2.2 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Single Tube		Two Tubes (Push-Pull)
	Single Tube	Pentode	
Plate voltage.....	180	315	250 volts
Grid 2 (screen) voltage.....	180	225	250 volts
Grid 1 (control-grid) voltage.....	-8.5	-13.0	-15.0 volts
Plate resistance (approx.).....	50,000	80,000	ohms
Transconductance.....	3700	3750	μmhos
Grid 1 input voltage, peak a-f.....	8.5	13	30▲ volts
Plate current, zero signal.....	29	34	70 ma
Plate current, maximum signal.....	30	35	79 ma
Grid 2 current, zero signal.....	3.0	2.2	5.0 ma
Grid 2 current, maximum signal.....	4.0	6.0	13.0 ma
Load resistance impedance.....	5500	8500	10,000♦ ohms
Total harmonic distortion (approx.).....	8	12	5 %
Power output, maximum signal.....	2.0	5.5	10 watts
Vertical Deflection Amplifier*		Pentode	Triode
Plate voltage.....		250	250 volts
Grid 2 (screen) voltage.....		250	250 volts
Grid 1 (control-grid) voltage.....		-12.5	-12.5 volts
Plate resistance, per tube.....		50,000	1960 ohms
Transconductance.....		4100	5000 μmhos
Plate current.....		45	49.5 ma
Grid 2 current.....		4.5	ma
Grid 1 bias for $I_b = 0.5$ ma.....		-37	-37 volts
Amplification.....			9.8

*Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.

♦Grid 2 connected to plate. ▲Plate to plate. ▲Grid to grid.

CBS ELECTRON TUBES



5CM8




Multipurpose triode-pentode television amplifier, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.7 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
Heater negative to cathode..... 200 volts
- Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

Grid to plate: g1 to p.....	1.9	$\mu\mu\text{f}$
Input: g1 to k + h.....	1.6	$\mu\mu\text{f}$
Output: p to k + h.....	0.22	$\mu\mu\text{f}$

Pentode Section

Grid to plate: g1 to p, max.....	0.02	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3 + i.s.....	6.0	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3 + i.s.....	2.6	$\mu\mu\text{f}$
Coupling: pentode grid 1 to triode plate.....	0.15	$\mu\mu\text{f}$
Coupling: pentode plate to triode grid.....	0.01	$\mu\mu\text{f}$
Coupling: pentode plate to triode plate.....	0.10	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....	300 volts	
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	1.0	2.0 watts
Grid 2 dissipation.....	0.5 watts	
Grid 1 circuit resistance		
Fixed bias.....	2.5 meg	
Self bias.....	1.0 meg	

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

	Triode	Pentode
Plate supply voltage.....	250	200 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....	150 volts	
Grid 1 (control-grid) voltage.....	-2	0 volts
Cathode-bias resistor.....	180 ohms	
Plate resistance (approx.).....	50,000	300,000 ohms
Transconductance.....	2000	6200 μmhos
Amplification factor.....	100	
Plate current.....	1.8	9.5 ma
Grid 2 current.....	2.8 ma	
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-8.0 volts	




5CZ5



Beam power tube for 110° vertical deflection or audio power amplifier service, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.7 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

- Grid to plate: g1 to p, max..... 0.7 $\mu\mu\text{f}$
- Input: g1 to k + h + g2 + b.p..... 8.0 $\mu\mu\text{f}$
- Output: p to k + h + g2 + b.p..... 8.5 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

	Vertical† Defl. Amp.	Class A Amplifier	P-P Class AB1 Amplifier
Plate voltage, d-c.....	350	350	350 volts
Plate voltage, peak positive pulse (absolute max.).....	2200		volts
Grid 2 voltage.....	285	285	285 volts
Grid 1 voltage, peak negative....	-250		volts
Plate dissipation.....	10	12	12 watts
Grid 2 dissipation.....	2	2	2 watts
Cathode current, av.....	40		ma
Cathode current, peak.....	140		ma
Grid 1 circuit resistance			
Fixed bias.....	0.5	0.1	0.1▲ meg
Self bias.....	1.0	1.0	1.0▲ meg
Bulb temperature at hottest point	250	250	250 °C

CHARACTERISTICS AND TYPICAL OPERATION

	Class A	Class A, A-F Power	P-P Class AB1,▼ A-F Power
Plate voltage.....	75	200	250
Grid 2 (screen) voltage..	250	250	250
Grid 1 (control-grid) voltage.....	0	-14	-23.5▲ volts
Plate resistance (approx).....	73,000	73,000	ohms
Transconductance.....	4800	4800	μmhos
Grid 1 input voltage, peak a-f.....		13	47† volts
Plate current, zero signal.....	130*	46	46 ma
Plate current, maximum signal.....		48	103 ma
Grid 2 current.....	16*	4.6	ma
Grid 2 current, zero signal.....		4.6	3 ma
Grid 2 current, maximum signal.....		8.0	13 ma
Grid 1 bias for $I_b = 100 \mu\text{a}$		-35	volts
Load resistance impedance.....		5000	7500‡ ohms
Total harmonic distortion (approx.).....		10	1 %
Power output, maximum signal.....		5.4	21.5 watts


NOTES:

- †Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.
- *Values are measurable by a method involving a recurrent waveform such that plate dissipation and grid 2 input will be kept within their ratings.
- ▲The input coupling network should not introduce excessive resistance into the grid 1 circuit. Transformer or impedance-coupling devices are recommended.
- ‡Grid 1 to grid 1. ▼Values are for two tubes.
- ‡Plate to plate.

CBS ELECTRON TUBES




5J6



Vhf oscillator, amplifier, or mixer, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.7 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 100 volts
 - Heater positive to cathode*..... 100 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1		Section 2		
	No Shield	Shield†	No Shield	Shield†	
Grid to plate: g1 to p...	1.6	1.5	1.6	1.5	μμf
Input: g1 to k + h.....	2.2	2.6	2.2	2.6	μμf
Output: p to k + h.....	0.4	1.6	0.4	1.0	μμf

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Class A Amplifier (each section)

- Plate voltage..... 300 volts
- Control-grid voltage, positive d-c..... 0 volts
- Plate dissipation..... 1.5 watts
- Control-grid circuit resistance (self bias)†..... 0.5 meg

Class C Oscillator (each section)

- Plate voltage..... 300 volts
- Control-grid voltage, negative d-c..... 40 volts
- Control-grid voltage, positive d-c..... 0 volts
- Plate dissipation..... 1.5 watts
- Plate input..... 4.5 watts
- Plate current..... 15 ma
- Grid current..... 8.0 ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier (each section)

- Plate voltage..... 100 volts
- Cathode-bias resistor..... 50 ohms
- Plate resistance (approx.)..... 7100 ohms
- Transconductance..... 5300 μmhos
- Amplification factor..... 38
- Plate current..... 8.5 ma

Class C Oscillator, R-F Power Amplifier & Oscillator (Both sections push-pull)

- Plate voltage..... 150 volts
- Grid voltage†..... -10 volts
- Plate current..... 30 ma
- Grid current (approx.)..... 16 ma
- Grid driving power (approx.)..... 0.35 watt
- Power output (approx.)..... 3.5 watts

5J6 (cont.)

Mixer Service[▲]

Plate voltage.....	150 volts
Cathode-bias resistor.....	810 ohms
Oscillator peak voltage.....	3.0 volts
Plate resistance (approx.).....	10,200 ohms
Conversion transconductance.....	1900 μ mhos
Plate current.....	4.8 ma

NOTES:

†Under rated maximum conditions total grid circuit resistance should not exceed 0.5 meg. Fixed bias operation is not recommended.

‡Obtained by a 625-ohm grid resistor, a 220-ohm cathode resistor or a fixed voltage supply.

▲Each section operated separately with grid and plate of opposite sections grounded. The value of the cathode-bias resistor is determined by the total cathode current of both sections.

5T4

(See chart for seldom-used tubes)



5T8




**Combined a-m, f-m detector and audio amplifier,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 4.7 volts
 Current..... 600 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 100 volts
 Heater positive to cathode*..... 100 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Shield†	No Shield	
Grid to plate: g1 to p.....	1.7	1.7	μμf
Input: g1 to k + h + i.s.....	1.7	1.6	μμf
Output: p to k + h + i.s.....	2.5	1.2	μμf
Grid to any diode plate, max.....	0.035	0.035	μμf
Diode 1 input.....	3.9	3.7	μμf
Diode 2 input.....	3.9▲	3.7	μμf
Diode 3 input.....	3.6	3.4	μμf
Diode 2 cathode to all.....	8.8♠	7.7	μμf

† JETEC shield 315 connected to pin 7 except as noted

▲ JETEC shield 315 connected to pin 3

♠ JETEC shield 315 connected to pins 4 and 5

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Control-grid voltage, positive d-c.....	0	volts
Plate dissipation.....	1.0	watt
Diode current*.....	5.0	ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250	volts
Control-grid voltage.....	-1	-3	volts
Plate resistance (approx.).....	54,000	58,000	ohms
Transconductance.....	1300	1200	μmhos
Amplification factor.....	70	70	
Plate current.....	0.8	1.0	ma
Diode current (average)†.....	20	20	ma

NOTES:

*Each diode, continuous operation.

†Each diode with 5.0V d-c applied.




5U4G



High-vacuum full-wave power rectifier

FILAMENT CHARACTERISTICS

Voltage, a-c..... 5.0 volts
 Current..... 3.0 amp



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage, peak inverse..... 1550 volts
 Plate supply voltage, rms
 (each plate)†..... RATING CHART I*
 Output current, d-c..... RATING CHART I*
 Plate current, peak steady state
 (each plate)..... RATING CHART II* 800 ma
 Plate current, peak transient
 (each plate)..... RATING CHART III* 4.0 amp

CHARACTERISTICS

Tube Voltage Drop

Conducting 225 ma (each plate)..... 44 volts

TYPICAL OPERATION

Full-Wave Rectifier (Capacitor Input Filter)

Plate supply voltage, rms (each plate)†..... 300 450 volts
 Plate supply resistance (each plate)..... 35 85 ohms
 Filter input capacitor..... 40 40 μ f
 Output current, d-c..... 245 225 ma
 Output voltage at filter input, d-c..... 290 470 volts

TYPICAL OPERATION

Full-Wave Rectifier (Choke Input Filter)

Plate supply voltage, rms (each plate)†..... 550 volts
 Filter input choke..... 10 henrys
 Output current, d-c..... 225 ma
 Output voltage at filter input, d-c..... 440 volts

NOTES:

*Rating Charts given in APPENDIX of CBS Tube Manual.

†The indicated values of a-c plate supply voltage are measured without load.



5U4GB


5U4GA



**High-vacuum full-wave power rectifier
with high d-c current output**

FILAMENT CHARACTERISTICS

Voltage, a-c or d-c..... 5.0 volts
Current..... 3.0 amp



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Rectifier Service †	5U4GA	5U4GB
Plate voltage, peak inverse.....	1550	1550 volts
Plate supply voltage, rms (each plate) ‡....	RATING CHART I*	550
Output current, d-c....	RATING CHART I*	550 volts
Plate current, peak steady state (each plate).....	RATING CHART II*	0.9
Plate current, peak transient (each plate).....	RATING CHART III*	4.3
		1.0 amp
		4.6 amp

CHARACTERISTICS

Tube Voltage Drop

Conducting 225 ma (each plate).....	44 volts
Conducting 275 ma (each plate).....	50 volts
Conducting 300 ma (each plate).....	54 volts

TYPICAL OPERATION

Full-Wave Rectifier (Capacitor Input Filter)

5U4GBA

Plate supply voltage, rms (each plate) ‡.....	300	450 volts
Plate supply resistance (each plate).....	21	67 ohms
Filter input capacitor.....	40	40 μf
Output current, d-c.....	300	275 ma
Output voltage at filter input, d-c.....	290	460 volts

TYPICAL OPERATION

Full-Wave Rectifier (Choke Input Filter)

5U4GA

5U4GB

Plate supply voltage, rms (each plate) ‡.....	550	550 volts
Filter input choke.....	10	10 henrys
Output current, d-c.....	250	275 ma
Output voltage at filter input, d-c.....	440	420 volts

NOTES:

*Rating Charts given in APPENDIX of CBS Tube Manual for 5U4GB.

†For use with sinusoidal supply voltages within the frequency range of 25 to 1000 c.p.s.

‡The indicated value of a-c plate supply voltage is measured without load.

▲Operation for type 5U4GA is identical except for an output current of 275 ma at 300V, and 250 ma at 450V with total R_s of 25 and 67 ohms, respectively.



5U8




Vhf oscillator and mixer, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 4.7 volts
 Current..... 600 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	No Shield	Shield†	
Grid to plate: g1 to p.....	1.8	1.8	μμf
Input: g1 to k + h.....	2.5	2.5	μμf
Output: p to k + h.....	0.4	1.0	μμf
Heater to cathode: h to k.....	3.0	3.0	μμf
Pentode Section			
Grid to plate: g1 to p, max.....	0.01	0.006	μμf
Input: g1 to k + h + g2 + g3.....	5.0	5.0	μμf
Output: p to k + h + g2 + g3.....	2.6	3.5	μμf
Heater to cathode: h to k.....	3.0	3.0	μμf

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....	300 volts	
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.7	2.8 watts
Grid 2 dissipation.....	0.5 watt	

CHARACTERISTICS AND TYPICAL OPERATION

	Triode	Pentode
Plate voltage.....	150	250 volts
Grid 2 (screen) voltage.....	110 volts	
Cathode-bias resistor.....	56	68 ohms
Plate resistance (approx.).....	5000	400,000 ohms
Transconductance.....	8500	5200 μmhos
Amplification factor.....	40	
Plate current.....	18	10 ma
Grid 2 current.....	3.5 ma	
Grid 1 voltage (approx.) for I _b = 10 μa.....	-12	-10 volts



5V4G


5V4GA



High-vacuum full-wave power rectifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	5.0 volts
Current.....	2.0 amp



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Rectifier Service

Plate voltage, peak inverse.....	1400 volts
Plate current, peak steady state (each plate).....	525 ma
Plate current, peak transient (each plate).....	3.5 amp

CHARACTERISTICS

Tube Voltage Drop

Conducting 175 ma (each plate).....	25 volts
-------------------------------------	----------

TYPICAL OPERATION

Full-Wave Rectifier (Capacitor Input Filter)

Plate supply voltage, rms (each plate).....	375 volts
Plate supply impedance, min. (each plate).....	100 ohms
Filter input capacitor.....	10 μ f
Output current, d-c.....	175 ma
Output voltage at filter input, d-c.....	410 volts

TYPICAL OPERATION

Full-Wave Rectifier (Choke Input Filter)

Plate supply voltage, rms (each plate).....	500 volts
Filter input choke.....	4.0 henrys
Output current, d-c.....	175 ma
Output voltage at filter input, d-c.....	410 volts



5V6GT




Audio power amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	4.7 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



CBS ELECTRON TUBES

5V6GT (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p	0.7	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.	9.0	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.	7.5	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

Class A Amplifier

Plate voltage	315	volts
Grid 2 voltage	285	volts
Grid 2 supply voltage	315	volts
Plate dissipation*	12	watts
Grid 2 dissipation	2	watts
Grid 1 circuit resistance		
Fixed bias	0.1	meg
Self bias	0.5	meg

Vertical Deflection Amplifier† (triode connected):

Plate voltage	315	volts
Plate voltage, peak positive pulse (absolute max.)	1200	volts
Grid voltage, peak negative	250	volts
Plate dissipation*	9.0	watts
Cathode current, average	35	ma
Cathode current, peak	105	ma
Grid 1 circuit resistance, self bias	2.2	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier (Single Tube)

Plate voltage	180	250	315	volts
Grid 2 (screen) voltage	180	250	225	volts
Grid 1 (control-grid) voltage	-8.5	-12.5	-13.0	volts
Plate resistance (approx.)	50,000	50,000	80,000	ohms
Transconductance	3700	4100	3750	μmhos
Grid 1 input voltage, peak a-f	8.5	12.5	13.0	volts
Plate current, zero signal	29	45	34	ma
Plate current, maximum signal	30	47	35	ma
Grid 2 current, zero signal	3.0	4.5	2.2	ma
Grid 2 current, maximum signal	4.0	7.0	6.0	ma
Load resistance impedance	5500	5000	8500	ohms
Total harmonic distortion (approx.)	8	8	12	%
Power output, maximum signal	2.0	4.5	5.5	watts

Class A Push-Pull Amplifier (Two Tubes)

Plate voltage	250	285	volts
Grid 2 (screen) voltage	250	285	volts
Grid 1 (control-grid) voltage	-15	-19	volts
Grid-to-grid input voltage, peak a-f	30	38	volts
Plate current, zero signal	70	70	ma
Plate current, maximum signal	79	92	ma
Grid 2 current, zero signal	5	4	ma
Grid 2 current, maximum signal	13.0	13.5	ma
Load resistance, plate-to-plate	10,000	8000	ohms
Total harmonic distortion (approx.)	5.0	3.5	%
Power output, maximum signal	10	14	watts

Triode Connected:

Plate and grid 2 voltage (p + g2 tied together)	250	volts
Grid 1 voltage	-12.5	volts
Plate resistance (approx.)	1960	ohms
Transconductance	5000	μmhos
Grid 1 input voltage for $I_b = 0.5$ ma	-36	volts
Amplification factor	9.8	
Plate current	49.5	ma

NOTES:

*Tube protection is needed for no-drive conditions if grid-resistor bias is used.

†Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.

‡Screen tied to plate.

5W4/G/GT • 5X3 • 5X4G

(See chart for seldom-used tubes)



5X8




Vhf oscillator and mixer, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 4.7 volts
 Current..... 600 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 100 volts
 Heater positive to cathode*..... 100 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	No Shield	Shield \downarrow	
Grid to plate: g1 to p.....	1.4	1.4	$\mu\mu\text{f}$
Input: g1 to k + h.....	2.0	2.6	$\mu\mu\text{f}$
Output: p to k + h.....	0.5	1.0	$\mu\mu\text{f}$
Pentode Section			
Grid to plate: g1 to p.....	0.09	0.06	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	4.3	4.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	0.7	1.4	$\mu\mu\text{f}$
Coupling: pentode grid 1 to triode plate....	0.045	0.035	$\mu\mu\text{f}$
Coupling: pentode plate to triode plate....	0.040	0.008	$\mu\mu\text{f}$

\downarrow JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)

Converter Service	Triode as Oscillator	Pentode as Mixer
Plate voltage.....	250	250 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....		250 volts
Grid 1 voltage, positive d-c.....	0	0 volts
Grid 1 voltage, negative d-c.....	40	40 volts
Plate dissipation.....	1.5	2.0 watts
Grid 2 input.....		0.4 watt
Grid 1 input.....	0.5	watt
Grid 1 circuit resistance		
Fixed bias.....	0.1	0.1 meg
Self bias.....	0.5	0.5 meg

Pentode Section as Triode-Connected Mixer \dagger

Plate voltage.....	250 volts
Grid 1 voltage, positive d-c.....	0 volts
Grid 1 voltage, negative d-c.....	40 volts
Plate dissipation.....	2.4 watts

CBS ELECTRON TUBES

5X8 (cont.)

CHARACTERISTICS

	Triode	Pentode
Plate voltage.....	100	250 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....		150 volts
Cathode-bias resistor.....	100	200 ohms
Plate resistance (approx.).....	6900	750,000 ohms
Transconductance.....	5800	4600 μ mhos
Amplification factor.....	40	
Plate current.....	8.5	7.7 ma
Grid 2 current.....		1.6 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-10	-10 volts

Pentode Section Connected as Triode

Plate voltage.....	150 volts
Grid 3 (suppressor).....	connected to cathode at socket
Grid 2 (screen) voltage.....	connected to plate
Cathode-bias resistor.....	250 ohms
Plate resistance (approx.).....	7900 ohms
Transconductance.....	4000 μ mhos
Amplification factor.....	42
Plate current.....	7.8 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-10 volts

TYPICAL OPERATION

Triode 250mc oscillator and pentode mixer	Triode [†]	Pentode [‡]
Plate voltage.....	150	150 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....		150 volts
Mixer grid 1 (control grid) supply voltage.....		-3.5 volts
Oscillator voltage (rms) at mixer grid 1.....		2.6 volts
Mixer grid 1 (control grid) circuit resistance.....	120,000	ohms
Oscillator grid resistor.....	2700	ohms
Conversion transconductance.....		2100 μ mhos
Plate current.....	13	6.2 ma
Grid 2 (screen) current.....		1.8 ma
Grid 1 (control grid) current.....	3.6	ma
Grid 1 (control grid) current.....		2.0 μ a
Oscillator power output (approx.).....	0.5	watt

Pentode Section as Triode-Connected Mixer[†]

Plate voltage.....	150	volts
Grid 1 (control grid) supply voltage.....	-3.5	volts
Oscillator voltage (rms) at grid 1.....	2.6	volts
Grid 1 (control grid) circuit resistance.....	120,000	ohms
Conversion transconductance.....	2800	μ mhos
Plate current.....	7.8	ma
Grid 1 (control grid) current.....	2.0	μ a

NOTES:

[†]Grid 3 (suppressor) connected to cathode; Grid 2 (screen) connected to plate.


[‡]In TV or f-m receivers, it is desirable to operate the oscillator with less power input than given to avoid over-excitation and excessive radiation.

[‡]With separate excitation and triode unit grounded.



5Y3GT


5Y3G



High-vacuum full-wave power rectifier

FILAMENT CHARACTERISTICS

Voltage, a-c..... 5.0 volts
 Current..... 2 amp



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Rectifier Service

Plate voltage, peak inverse..... 1400 volts
 Plate supply voltage, rms
 (each plate)†..... RATING CHART* 500 volts
 Output current, d-c..... RATING CHART*
 Plate current, peak steady state (each plate)..... 440 ma
 Plate current, peak transient (each plate)..... 2.5 amp

CHARACTERISTICS

Tube Voltage Drop

Conducting 125 ma (each plate)..... 50 volts

TYPICAL OPERATION

Full-Wave Rectifier (Capacitor Input Filter)

Plate supply voltage, rms (each plate)†..... 350 volts
 Plate supply resistance (each plate)..... 50 ohms
 Filter input capacitor..... 20 μ f
 Output current, d-c..... 125 ma
 Output voltage at filter input, d-c..... 360 volts

Full-Wave Rectifier (Choke Input Filter)

Plate supply voltage, rms (each plate)..... 500 volts
 Filter input choke..... 10 henrys
 Output current, d-c..... 125 ma
 Output voltage at filter input, d-c..... 380 volts

NOTES:

*Rating Charts given in APPENDIX of CBS Tube Manual.


†Plate supply voltage is measured without load.

Type 5Y3G is identical to type 5Y3GT except for bulb style. It has an ST14 bulb with a maximum over-all height of $4\frac{3}{8}$ inches.



5Y4GT

5Y4G • 5Y4GA




Filamentary type high-vacuum full-wave rectifier

FILAMENT CHARACTERISTICS

Voltage, a-c..... 5.0 volts

Current..... 2.0 amp

Types 5Y4G, 5Y4GA, and 5Y4GT are electrically identical to type 5Y3GT but have a different basing.



5Z3




High-vacuum full-wave power rectifier

FILAMENT CHARACTERISTICS

Voltage, a-c or d-c..... 5.0 volts

Current..... 3.0 amp

Type 5Z3 is identical to type 5U4G except for basing and mounting position. Horizontal operation is permissible if pins 1 and 2 are in a vertical plane.



5Z4 • 6A3 • 6A4 • 6A5G • 6A6 6A7S • 6A8/G/GT

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




6AB4



Vhf triode for oscillator or grounded—grid amplifier service

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p.....	1.5	1.5	μμf
Input: g1 to k + h.....	2.2	2.2	μμf
Output: p to k + h.....	0.50	1.4	μμf
Heater to cathode: h to k.....	2.9	2.9	μμf

Grounded grid operation

Plate to cathode: p to k.....	0.24	0.20	μμf
Input: g1 to k + h.....	5.0	5.2	μμf
Output: p to k + h.....	1.7	2.6	μμf

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Control-grid voltage, negative d-c.....	50	volts
Plate dissipation.....	2.5	watts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250	volts
Cathode-bias resistor.....	270	200	ohms
Plate resistance (approx.).....	15,000	10,900	ohms
Transconductance.....	4000	5500	μmhos
Amplification factor.....	60	60	
Plate current.....	3.7	10	ma
Control-grid voltage (approx.) for I _b = 10 μa....	-5	-12	volts


6AB5/6N5 • 6AB6G 6AB7/1853 • 6AC5G/GT 6AC6GT

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




6AC7



High gain amplifier for r-f, i-f, and video stages

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield↓

Grid to plate: g1 to p, max.....	.015	μμf
Input: g1 to k + h + g2 + g3.....	11.0	μμf
Output: p to k + h + g2 + g3.....	5.0	μμf

↓Shell connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 voltage.....	150 volts
Grid 2 supply voltage.....	300 volts
Plate dissipation.....	3.02 watts
Grid 2 dissipation.....	0.38 watt
Grid 1 circuit resistance with self bias*	
Fixed screen voltage.....	0.25 meg
Series screen resistor.....	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Condition 1†	Condition 2‡
Plate voltage.....	300	300 volts
Grid 3 (suppressor)▲.....	0	0 volts
Grid 2 supply voltage.....	150	300 volts
Cathode bias resistor, min.▼.....	160	160 ohms
Screen series resistor.....		60,000 ohms
Plate resistance (approx.).....	1.0	1.0 meg
Transconductance.....	9000	9000 μmhos
Plate current.....	10	10 ma
Grid 2 current.....	2.5	2.5 ma

NOTES:

- *For maximum voltage conditions and with cathode bias.
- †Sharp cutoff if fixed screen supply is used.
- ‡Extended cutoff if screen resistor is used.
- ▲In r-f and i-f stages, connect suppressor directly to ground for minimum feedback.
- ▼Adjusted to give a plate current of 10 ma.

6AD5G/GT • 6AD6G • 6AD7G 6AE5GT • 6AE6G • 6AE7G/GT


(See chart for seldom-used tubes)

CBS ELECTRON TUBES



6AF4


6AF4A



Triode local oscillator for uhf television tuners

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
Current..... 225 ma



Types 6AF4 and 6AF4A are identical to types 2AF4 and 2AF4A, respectively except for heater characteristics.

6AF5G • 6AF6G

(See chart for seldom-used tubes)




6AG5



R-f or i-f pentode amplifier at frequencies up to about 400 mc

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
Current..... 300 ma
Peak heater-cathode voltage, max.
Heater negative to cathode..... 90 volts
Heater positive to cathode..... 90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p, max.....	0.03	0.02	μf
Input: g1 to k + h + g2 + g3.....	6.5	6.6	μf
Output: p to k + h + g2 + g3.....	1.8	3.1	μf
Triode connection*			
Grid to plate: g1 to p.....	2.5	2.5	μf
Input: g1 to h + k + g3 + i.s.....	3.6	3.6	μf
Output: p and g2 to h + k + g3 + i.s.....	3.0	4.3	μf

†JETEC shield 316 connected to cathode.

6AG5 (cont.)

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....	300	volts
Grid 1 voltage, positive d-c.....	0	volts
Plate dissipation.....	2.0	watts
Grid 2 dissipation.....	0.5	watts
Plate voltage*.....	300	volts
Grid 1 voltage, positive d-c*.....	0	volts
Plate and grid 2 dissipation (total)*.....	2.5	watts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	125	250	volts
Grid 2 (screen) voltage.....	100	125	150	volts
Cathode bias resistor.....	180	100	180	ohms
Plate resistance (approx.).....	0.6	0.5	0.8	meg
Transconductance.....	4500	5100	5000	μmhos
Plate current.....	4.5	7.2	6.5	ma
Grid 2 current.....	1.4	2.1	2.0	ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-5	-6	-8	volts

Class A Amplifier-triode connection*

Plate voltage.....	180	250	volts
Cathode bias resistor.....	330	820	ohms
Plate resistance, approx.....	.008	.01	meg
Amplification factor.....	45	42	
Transconductance.....	5700	3800	μmhos
Plate and grid 2 current, total.....	7	5.5	ma

NOTE:


*Triode connection: grid 2 (screen) tied to plate.

6AG6G

(See chart for seldom-used tubes)




6AG7



Video power amplifier with high transconductance and high power sensitivity

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	650	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



CBS ELECTRON TUBES

6AG7 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield‡

Grid to plate: g1 to p, max.....	0.06	μμf
Input: g1 to k + h + g2 + g3.....	13.0	μμf
Output: p to k + h + g2 + g3.....	7.5	μμf
Grid 1 to grid 2 (approx.).....	5.8	μμf
Grid 1 to cathode (approx.).....	5.2	μμf
Heater to cathode (approx.).....	10.7	μμf

‡Shell connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Grid 2 voltage.....	300	volts
Grid 1 voltage, positive d-c.....	0	volts
Plate dissipation.....	9.0	watts
Grid 2 dissipation.....	1.5	watts
Grid 1 circuit resistance		
Fixed bias.....	0.25	meg
Self bias.....	1.0	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	300	volts
Grid 2 (screen) voltage.....	150	volts
Grid 1 (control-grid) voltage.....	-3	volts
Grid 1 input voltage, peak a-f.....	3	volts
Plate current, zero signal.....	30	ma
Plate current, maximum signal.....	30.5	ma
Grid 2 current, zero signal.....	7	ma
Grid 2 current, maximum signal.....	9	ma
Plate resistance (approx.).....	0.13	meg
Transconductance.....	11,000	μmhos
Load resistance.....	10,000	ohms
Total harmonic distortion.....	7	%
Power output, maximum signal.....	3	watts

Class A Video Voltage Amplifier (4 mc bandwidth)*

	Grid resistor† bias	Cathode bias
Plate supply voltage.....	300	300 volts
Grid 2 (screen) voltage.....	115‡	125 ▲
Grid 1 (control-grid) voltage, zero signal.....	0	-2.0 volts
Grid 1 resistor.....	.25 to 0.5	meg
Cathode resistor.....		57 ohms
Grid 1 signal voltage (peak to peak).....	4.0	4.0 volts
Plate current, zero signal.....	45	28 ma
Grid 2 current, zero signal.....	13	7 ma
Load resistor.....	3500	3500 ohms
Voltage output (peak to peak).....	135	140 volts

NOTES:

*With I. S. (Pin 3) connected to ground.


†Intended for use where d-c restoration is accomplished in the grid circuit of the 6AG7.

‡Obtained from a regulated power supply.

▲Obtained from the plate supply voltage through a screen-dropping resistor of 25,000 ohms.



6AH4GT




Vertical-deflection-output amplifier for television

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	750	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts

*D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p.....	4.4	4.2	μμf
Input: g1 to k + h.....	7.0	7.5	μμf
Output: p to k + h.....	1.7	3.2	μμf

†JETEC shield 308 connected to ground.

MAXIMUM RATINGS (Design center values unless noted)

Vertical Deflection Amplifier †

Plate voltage, d-c.....	500	volts
Plate voltage, peak pos. (absolute max.).....	2000	volts
Control-grid voltage, peak negative.....	200	volts
Plate dissipation ‡.....	7.5	watts
Cathode current, average.....	60	ma
Cathode current, peak.....	180	ma
Control-grid circuit resistance, fixed bias.....	2.2	meg

AVERAGE CHARACTERISTICS

Plate voltage.....	250	250	volts
Control-grid voltage.....	-33	-23	volts
Plate resistance (approx.).....		1780	ohms
Transconductance.....		4500	μmhos
Amplification factor.....		8.0	
Plate current.....	5.0	30	ma
Grid 1 voltage (approx.) for I _b = 0.5 ma.....		-40	volts

TYPICAL OPERATION

Vertical Deflection Amplifier ▲

Plate voltage.....	240	volts
Control-grid input voltage (approx.)		
Sawtooth component.....	52	volts
Negative peak component.....	87	volts
Cathode-bias resistor ▼.....	1100	ohms
Cathode current, average d-c.....	22	ma
Cathode current, peak to peak.....	62	ma
Plate output voltage (approx.)		
Sawtooth component.....	150	volts
Positive peak component.....	900	volts

NOTES:

†Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.

‡Tube protection is needed for no-drive conditions if grid-resistor bias is used.

▲For use in conjunction with a 70° picture tube operating at 15 kv anode voltage.

▼Typical value of total cathode resistance for optimum linearity.

6AH5G

(See chart for seldom-used tubes)




6AH6



Sharp-cutoff pentode amplifier for r-f, i-f, or video circuits

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield‡

Grid to plate: g1 to p, max.....	0.020	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	10	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	3.6	$\mu\mu\text{f}$

‡JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX
Grid 2 supply voltage.....	300 volts
Plate dissipation.....	3.2 watts
Grid 2 dissipation.....	0.4 watt
Cathode current.....	13 ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	300 volts
Grid 3 (suppressor)*.....	connected to cathode at socket
Grid 2 (screen) voltage.....	150 volts
Cathode bias resistor.....	160 ohms
Plate resistance (approx.).....	0.5 meg
Transconductance.....	9000 μmhos
Plate current.....	10.0 ma
Grid 2 current.....	2.5 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-7 volts

NOTE:

*Grid 3 has very limited control characteristics and is not intended to be used as a control electrode. Its transconductance to the plate is approximately 2 μmhos and its mu is 0.7 to 1.0.


6AH7GT • 6AJ4 • 6AJ5 • 6AJ7

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




6AK5



**R-f voltage amplifier for frequencies
up to 400 mc**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	175	ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	120	volts
Heater positive to cathode.....	120	volts



7B0

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield [†]	
Grid to plate: g1 to p, max.....	0.03	0.02	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	4.0	4.0	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	2.1	2.8	$\mu\mu\text{f}$

[†]JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	180	volts
Grid 2 voltage.....	140	volts
Grid 2 supply voltage.....	180	volts
Grid 1 voltage, positive d-c.....	0	volts
Plate dissipation.....	1.7	watts
Grid 2 dissipation.....	0.5	watt
Cathode current.....	18	ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	120	180	volts
Grid 3 (suppressor).....	connected to cathode at socket		
Grid 2 (screen) voltage.....	120	120	volts
Cathode bias resistor*.....	180	180	ohms
Plate resistance (approx.).....	0.3	0.5	meg
Transconductance.....	5000	5100	μmhos
Plate current.....	7.5	7.7	ma
Grid 2 current.....	2.5	2.4	ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-8.5	-8.5	volts

NOTE:

*Fixed bias operation is not recommended.




6AK6



Power output amplifier with low heater current

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	150 ma
Heater-cathode voltage, max. d-c	
Heater negative to cathode.....	100 volts
Heater positive to cathode.....	100 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.12	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	3.6	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	4.2	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 voltage.....	250 volts
Plate dissipation.....	2.75 watts
Grid 2 dissipation.....	.75 watt
Grid circuit resistance	
Fixed bias.....	0.1 meg
Self bias.....	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	180 volts
Grid 2 (screen) voltage.....	180 volts
Grid 1 (control-grid) voltage.....	-9 volts
Grid 3 (suppressor).....	connected to cathode at socket
Plate resistance (approx.).....	0.2 ohms
Transconductance.....	2300 μmhos
Grid 1 input voltage, peak a-f.....	9 volts
Plate current, zero signal.....	15 ma
Grid 2 current, zero signal.....	2.5 ma
Load resistance impedance.....	10,000 ohms
Total harmonic distortion (approx.).....	10 %
Power output, maximum signal.....	1.1 watts

6AK7

(See chart for seldom-used tubes)




6AL5



A-m, f-m detector, or low-power rectifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	330 volts
Heater positive to cathode.....	330 volts



Type 6AL5 is identical to type 3AL5 except for heater characteristics.

6AL6G

(See chart for seldom-used tubes)




6AL7GT



Tuning indicator controlled by f-m discriminator d-c output

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	150 ma
Peak heater-cathode voltage, max.....	90 volts



MAXIMUM RATINGS (Design center values)

Target voltage, maximum.....	365 volts
Target voltage, minimum.....	220 volts

CHARACTERISTICS AND TYPICAL OPERATION



Target voltage.....	315 volts
Deflection electrodes 1, 2 & 3 voltage.....	0 volts
Grid voltage*.....	0 volts
Cathode bias resistor.....	3300 ohms
Deflection sensitivity (approx.) for first millimeter of deflection†.....	1.0 mm/volt
Grid voltage (approx.) for fluorescence cutoff.....	-7.0 volts

NOTES:

- *Grid should be connected to cathode when not used for fluorescence control.
- †For deflection electrodes 1 and 2.

6AL7GT (cont.)

TYPICAL FM TUNING INDICATOR




6AM4



Uhf grounded-grid mixer for television tuners

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	225 ma
Peak heater-cathode voltage, max.*.....	80 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p.....	2.4	2.8	μμf
Input: g1 to k + h.....	4.4	4.6	μμf
Output: p to k + h.....	0.16	0.16	μμf

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	200 volts
Control-grid voltage, positive d-c.....	0 volts
Plate dissipation.....	2.0 watts

CHARACTERISTICS AND TYPICAL OPERATION

Plate voltage.....	200 volts
Cathode-bias resistor.....	100 ohms
Plate resistance (approx.).....	.0087 meg
Transconductance.....	9800 μmhos
Amplification factor.....	85
Plate current.....	7.5 ma
Control-grid voltage (approx.) for $I_b = 10 \mu a$	-6.5 volts

NOTES:

- *When operated in series d-c with a second tube, heater-cathode voltage may be as high as 250 volts maximum under cutoff conditions when heater is negative to cathode.
- †Operation with fixed bias not recommended.

CBS ELECTRON TUBES



6AM8




High-gain pentode i-f amplifier and high-perveance diode video detector

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



Type 6AM8 is identical to type 5AM8 except for heater characteristics.

6AN4 • 6AN5 • 6AN6

(See chart for seldom-used tubes)



6AN8




Combined sync clipper, sync separator, etc. and i-f or video amplifier for television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



Type 6AN8 is identical to type 5AN8 except for heater characteristics.



6AQ5


6AQ5A



Audio power amplifier or TV vertical deflection amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts
 *D-c component must not exceed 100 volts max.



6AQ5A

Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual)

Types 6AQ5 and 6AQ5A are identical to type 5AQ5 except for heater characteristics.




6AQ6



Combined a-m detector, audio voltage amplifier, and avc tube

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 150 ma
 Peak heater-cathode voltage, max..... 90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES†

Triode Section

Grid to plate: g1 to p..... 1.8 $\mu\mu\text{f}$
 Input: g1 to k + h..... 1.7 $\mu\mu\text{f}$
 Output: p to k + h..... 1.5 $\mu\mu\text{f}$

†With close fitting shield connected to cathode.

MAXIMUM RATINGS (Design center values)

Triode plate voltage..... 300 volts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier (Triode Unit)

Plate voltage.....	100	250	volts
Grid 1 (control-grid) voltage.....	-1	-3	volts
Plate resistance (approx.).....	61,000	58,000	ohms
Transconductance.....	1150	1200	μmhos
Amplification factor.....	70	70	
Plate current.....	0.8	1.0	ma

Diode Unit—Two diode plates are placed around a cathode, the sleeve of which is common to the triode unit. Diode biasing of the triode unit is not suitable.

6AQ7GT

(See chart for seldom-used tubes)




6AR5



Power output audio amplifier having high efficiency

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	400 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage.....	250 volts
Grid 2 voltage.....	250 volts
Plate dissipation.....	8.5 watts
Grid 2 dissipation.....	2.5 watts
Grid circuit resistance	
Fixed bias.....	0.1 meg
Cathode bias.....	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	250	250 volts
Grid 2 (screen) voltage.....	250	250 volts
Grid 1 (control-grid) voltage.....	-16.5	-18 volts
Plate resistance (approx.).....	65,000	68,000 ohms
Transconductance.....	2400	2300 μ hos
Grid 1 input voltage, peak a-f.....	16.5	18 volts
Plate current, zero signal.....	34	32 ma
Plate current, maximum signal.....	35	33 ma
Grid 2 current, zero signal.....	5.7	5.6 ma
Grid 2 current, maximum signal.....	10	10 ma
Load resistance impedance.....	7000	7600 ohms
Total harmonic distortion (approx.).....	7	11 %
Power output, maximum signal.....	3.2	3.4 watts

6AR6

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




6AR8



Sheet beam tube used as synchronous detector
in color television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	0.3 amp



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Deflectors 1 and 2 to all, each deflector.....	4.8	$\mu\mu\text{f}$
Grid 1 to all except plates.....	7.5	$\mu\mu\text{f}$
Plates 1 and 2 to all, each plate.....	5.0	$\mu\mu\text{f}$
Grid 1 to deflector 1, max.....	0.040	$\mu\mu\text{f}$
Grid 1 to deflector 2, max.....	0.060	$\mu\mu\text{f}$
Plate 1 to plate 2.....	0.4	$\mu\mu\text{f}$
Deflector 1 to deflector 2.....	0.38	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate 1 and plate 2 voltage.....	300 volts
Accelerator voltage.....	300 volts
Deflectors 1 and 2 voltage, peak positive.....	150 volts
Deflectors 1 and 2 voltage, peak negative.....	150 volts
Grid 1 voltage, positive d-c.....	0 volts
Plates 1 and 2 dissipation, each plate.....	2.0 watts
Cathode current, d-c.....	30 ma
Grid 1 circuit resistance	
Fixed bias.....	0.1 meg
Self bias.....	0.25 meg

CHARACTERISTICS

Deflectors Grounded

Plates 1 and 2 voltage, connected together.....	250 volts
Accelerator voltage.....	250 volts
Deflectors 1 and 2 voltage.....	0 volts
Cathode-bias resistor.....	300 ohms
Plate current, total.....	10 ma
Accelerator current.....	0.4 ma
Grid 1 transconductance.....	4000 μmhos
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-14 volts

Deflectors Not Grounded

Plates 1 and 2 voltage.....	250 volts
Accelerator voltage.....	250 volts
Cathode bias resistor.....	300 ohms
Deflector switching voltage, maximum*.....	20 volts
Deflector bias voltage	
for min. deflector switching voltage*.....	-8 volts
Voltage difference between deflectors	
when $I_{b1} = I_{b2}$ (approx.).....	0 volts
Plate 1 current, max. with $E_{d1} = -15\text{V}$, $E_{d2} = +15\text{V}$	1.0 ma
Plate 2 current, max. with $E_{d1} = +15\text{V}$, $E_{d2} = -15\text{V}$	1.0 ma
Deflector 1 current,	
max. with $E_{d1} = +25\text{V}$, $E_{d2} = -25\text{V}$	0.5 ma
Deflector 2 current,	
max. with $E_{d1} = -25\text{V}$, $E_{d2} = +25\text{V}$	0.5 ma

NOTE:

*Deflector switching voltage is the total voltage change on either deflector with an equal and opposite change on the other deflector required to switch the plate current from one plate to another.




6AS5



Audio power output amplifier giving high output at low B supply voltage

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	800	ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.6	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	12	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	6.2	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	150	volts
Grid 2 voltage.....	117	volts
Plate dissipation.....	5.5	watts
Grid 2 dissipation.....	1.0	watt
Grid 1 circuit resistance Fixed bias.....	0.1	meg
Self bias.....	0.5	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	150	volts
Grid 2 (screen) voltage.....	110	volts
Grid 1 (control-grid) voltage.....	-8.5	volts
Transconductance.....	5600	μmhos
Grid 1 input voltage, peak a-f.....	8.5	volts
Plate current, zero signal.....	35	ma
Plate current, maximum signal.....	36	ma
Grid 2 current, zero signal.....	2.0	ma
Grid 2 current, maximum signal.....	6.5	ma
Load resistance impedance.....	4500	ohms
Total harmonic distortion (approx.).....	10	%
Power output, maximum signal.....	2.2	watts

6AS6 • 6AS7G

(See chart for seldom-used tubes)



6AS8




Combined high gain i-f, video, or agc amplifier and video detector

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts

*D-c component must not exceed 100 volts max.

Type 6AS8 is identical to type 5AS8 except for heater characteristics.



6AT6



Combined a-m detector, audio voltage amplifier and avc tube

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 300 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 90 volts
 Heater positive to cathode..... 90 volts

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	No Shield	Shield†	
Grid to plate: g1 to p.....	2.2	2.0	μμf
Input: g1 to k + h.....	2.2	2.2	μμf
Output: p to k + h.....	0.8	1.2	μμf
Diode 2 plate to triode grid.....	0.04	0.04	μμf

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)


Class A Amplifier	Triode
Plate voltage.....	300 volts
Grid 1 voltage, positive d-c.....	0 volts
Plate dissipation.....	0.5 watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode Unit	
Plate voltage.....	100	250 volts
Grid 1 (control-grid) voltage.....	-1	-3 volts
Plate resistance (approx.).....	.0054	.0058 meg
Transconductance.....	1300	1200 μmhos
Amplification factor.....	70	70
Plate current.....	0.8	1.0 ma
Plate current (each diode)*.....		1.0 ma

NOTE:

*Diode biasing of the triode section of the 6AT6 is not suitable.





6AT8


6AT8A



Combined vhf oscillator and mixer for television or a-m/f-m receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 100 volts
 Heater positive to cathode*..... 100 volts
 *D-c component must not exceed 100 volts max.



6AT8A


Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

Types 6AT8 and 6AT8A are identical to type 5AT8 except for heater characteristics.



6AU4GT


6AU4GTA



TV damper diode in the horizontal deflection circuit of television receivers

HEATER CHARACTERISTICS

Voltage..... 6.3 volts
 Current..... 1.8 amp
 Peak heater-cathode voltage, max.*
 Heater negative to cathode†..... 4500 volts
 Heater positive to cathode*..... 300 volts
 †D-c component must not exceed 900 volts max,
 *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Heater to cathode: h to k, max..... 4.0 $\mu\mu\text{f}$
 Cathode to plate-and-heater: k to p + h..... 11.5 $\mu\mu\text{f}$
 Plate to cathode-and-heater: p to k + h..... 8.5 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

TV Damper Service*	6AU4GT	6AU4GTA
Plate voltage, peak inverse†.....	4500	4500 volts
Plate current, d-c.....	175	190 ma
Plate current, peak.....	1050	1150 ma
Plate dissipation.....	6.0	6.0 watts

AVERAGE CHARACTERISTICS

Tube voltage drop at $I_b = 350$ ma..... 25 volts

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.
 †Absolute maximum value.

CBS ELECTRON TUBES



6AU5GT




Horizontal deflection amplifier used in high-efficiency TV sweep circuits

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	1.25	amp
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.5	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	11.3	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	7.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

Horizontal Deflection Amplifier*

Plate supply voltage, d-c (boost + d-c power supply)...	550	volts
Plate voltage, peak pos. (absolute max.).....	5500	volts
Plate voltage, peak negative pulse.....	-1250	volts
Grid 2 voltage, d-c.....	200	volts
Grid 1 voltage, peak negative.....	-300	volts
Plate dissipation†.....	10	watts
Grid 2 dissipation.....	2.5	watts
Cathode current, average.....	110	ma
Cathode current, peak.....	400	ma
Grid 1 circuit resistance.....	0.47	meg
Bulb temperature at hottest point▲.....	210	°C

AVERAGE CHARACTERISTICS

Instantaneous values

Plate voltage.....	60	100	115	volts
Grid 2 (screen) voltage.....	175	100	175	volts
Grid 1 (control-grid) voltage.....	0	-4.5	-20	volts
Transconductance.....			5600	μmhos
Plate current.....	210			ma
Grid 2 current.....	25			ma
Amplification factor.....		5.9		

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

†Preferably obtained from a series dropping resistor of sufficient value to limit grid 2 input to rated maximum.

‡Tube protection is needed for no-drive conditions if grid-resistor bias is used.

▲In vertical position, base down, and in free space with natural ventilation, hottest point is center of dome just above open end of cathode sleeve.



6AU6

6AU6A




**R-f amplifier, i-f amplifier, f-m limiter,
or audio voltage amplifier**

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 300 ma
 Peak heater-cathode voltage, max.
 Heater negative **6AU6A** **6AU6**
 to cathode..... 200 180 volts
 Heater positive
 to cathode*... 200 100 volts

*D-c component must not exceed 100 volts max.



6AU6A

Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

Types 6AU6 and 6AU6A are identical to types 3AU6 and 4AU6 except for heater ratings.



6AU8

6AU8A




**Combined sync amplifier, separator, or clipper, etc.,
and video or i-f amplifier**

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 600 ma
 Peak heater-cathode voltage, max.
 Heater negative to
 cathode..... 200 volts
 Heater positive to
 cathode*..... 200 volts

Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

	6AU8	6AU8A	
Grid to plate: g1 to p.....	2.2	2.2	$\mu\mu\text{f}$
Input: g1 to k + h.....	2.6	2.6	$\mu\mu\text{f}$
Output: p to k + h.....	0.34	0.34	$\mu\mu\text{f}$

Pentode Section

Grid to plate: g1 to p.....	0.044	0.06	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	7.5	7.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	2.4	3.4	$\mu\mu\text{f}$
Coupling: pentode grid 1 to triode plate, max.....	0.006	0.006	$\mu\mu\text{f}$
Coupling: pentode plate to triode grid, max.....	0.022	0.022	$\mu\mu\text{f}$
Coupling: pentode plate to triode plate, max.....	0.12	0.12	$\mu\mu\text{f}$

CBS ELECTRON TUBES

6AU8 • 6AU8A (cont.)

MAXIMUM RATINGS (Design center values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....		300 volts
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.5	3.0 watts
Grid 2 dissipation.....		1.0 watt
Grid 1 circuit resistance		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode	Pentode
Plate voltage.....	150	200 volts
Grid 2 (screen) voltage.....		125 volts
Cathode-bias resistor.....	150	82 ohms
Plate resistance (approx.).....	8200	150,000 ohms
Transconductance.....	4900	7000 μ mhos
Amplification factor.....	40	
Plate current.....	9.0	15 ma
Screen current.....		3.4 ma
Grid 1 voltage (approx.) for $I_b = 100 \mu$ a.....	-6.5	-8 volts

6AU8A†

Zero bias: with $E_b = 40V$, $E_{c2} = 125V$ (instantaneous values)

Plate current.....	30 ma
Grid 2 current.....	10 ma

NOTE:

†Type 6AU8A features a controlled plate knee characteristic.



6AV5GA

6AV5GT




Horizontal deflection amplifier for television receiver sweep circuits

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.2 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	6AV5GA	6AV5GT
Grid to plate: g1 to p.....	0.5	0.7 μ f
Input: g1 to k + h + g2 + b.p.....	14	14 μ f
Output: p to k + h + g2 + b.p.....	7.0	7.0 μ f

CBS ELECTRON TUBES

6AV5GA • 6AV5GT (cont.)

MAXIMUM RATINGS (Design center values unless noted) Horizontal Deflection Amplifier*

Plate supply voltage, d-c (boost + d-c power supply) . . .	550	volts
Plate voltage, peak pos. (absolute max.)	5500	volts
Plate voltage, peak negative pulse	1250	volts
Grid 2 voltage, d-c	175	volts
Grid 1 voltage, peak negative	300	volts
Plate dissipation †	11	watts
Grid 2 dissipation	2.5	watts
Cathode current, average	110	ma
Cathode current, peak	400	ma
Grid 1 circuit resistance	0.47	meg
Bulb temperature at hottest point	210	°C

AVERAGE CHARACTERISTICS

Instantaneous values

Plate voltage	60	250	volts
Grid 2 (screen) voltage	150 Δ	150	volts
Grid 1 (control-grid) voltage	0	-22.5	volts
Plate resistance (approx.)		14,500	ohms
Transconductance		5900	μ mhos
Plate current	260	57	ma
Grid 2 current	26	2.1	ma
Grid 1 voltage (approx.) for $I_b = 1.0$ ma		-43	volts

Triode Connected

Plate and grid 2 voltage (p + g2 tied together)	150	volts
Grid 1 voltage	-22.5	volts
Amplification factor	4.3	

NOTES:

*Voltage pulse duration must not exceed 10 μ s in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.

Δ Applied for a two second maximum so as not to injure tube.

CBS


6AV6



Combined a-m detector, avc, and audio voltage amplifier for radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3	volts
Current	300	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode	90	volts
Heater positive to cathode	90	volts



Type 6AV6 is identical to type 3AV6 except for heater ratings and heater-cathode voltage ratings.

CBS ELECTRON TUBES



6AW8


6AW8A



**Combined sync separator and video amplifier,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 600 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).
 *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section—6AW8 and 6AW8A	No Shield	Shield†	
Grid to plate: g1 to p.....	2.2	2.2	$\mu\mu\text{f}$
Input: g1 to k + h.....	3.2	3.4	$\mu\mu\text{f}$
Output: p to k + h.....	0.32	1.7	$\mu\mu\text{f}$

Pentode Section—6AW8

Grid to plate: g1 to p, max.....	0.036	0.030	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3 + i.s.....	11.0	11.0	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3 + i.s.....	2.8	3.6	$\mu\mu\text{f}$
Coupling: pentode grid 1 to triode plate, max.....	0.008	0.005	$\mu\mu\text{f}$
Coupling: pentode plate to triode grid, max.....	0.030	0.008	$\mu\mu\text{f}$
Coupling: pentode plate to triode plate, max.....	0.20	0.05	$\mu\mu\text{f}$

Pentode Section—6AW8A

Grid to plate: g1 to p.....	0.04	0.03	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3 + i.s.....	10.0	10.0	$\mu\mu\text{f}$
Output: p to h + k + g2 + g3 + i.s.....	3.6	4.5	$\mu\mu\text{f}$
Coupling: pentode grid 1 to triode plate.....	0.006	0.003	$\mu\mu\text{f}$
Coupling: pentode plate to triode grid.....	0.016	0.006	$\mu\mu\text{f}$
Coupling: pentode plate to triode plate.....	0.150	0.023	$\mu\mu\text{f}$

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....		300 volts
Grid 1 voltage, positive d-c.....		0 volts
Grid 1 voltage, negative d-c.....		50 volts
Plate dissipation.....	1.0	3.25 watts
Grid 2 dissipation.....		1.0 watt
Grid 1 circuit resistance		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

6AW8 • 6AW8A (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode	Pentode
Plate voltage.....	200	200 volts
Grid 2 (screen) voltage.....		150 volts
Grid 1 (control-grid) voltage.....	-2	0 volts
Cathode-bias resistor.....		180 ohms
Plate resistance (approx.).....	.0175	0.4 meg
Transconductance.....	4000	9000 μ mhos
Amplification factor.....	70	
Plate current.....	4.0	13 ma
Grid 2 current.....		3.5 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-5	-10 volts

6AW8A—Instantaneous Values

	Pentode
Plate voltage.....	65 volts
Grid 2 voltage.....	150 volts
Grid 1 voltage.....	0 volts
Plate current.....	42 ma
Grid 2 current.....	12.5 ma




6AX4GT



Damper diode for television horizontal sweep circuits

HEATER CHARACTERISTICS

Voltage.....	6.3 volts
Current.....	1.2 amp
Peak heater-cathode voltage, max.*	
Heater negative to cathode†	4400 volts
Heater positive to cathode*	300 volts
†D-c component must not exceed 900 volts max.	
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Heater to cathode: h to k, max.....	4.0	μ μ f
Cathode to plate-and-heater: k to p + h.....	8.5	μ μ f
Plate to cathode-and-heater: p to k + h.....	5.0	μ μ f

MAXIMUM RATINGS (Design center values unless noted)

TV Damper Service*

Plate voltage, peak inverse†.....	4400 volts
Plate current, d-c.....	125 ma
Plate current, peak.....	750 ma
Plate dissipation.....	4.8 watts

AVERAGE CHARACTERISTICS

Tube voltage drop at 250 ma.....	32 volts
----------------------------------	----------

NOTES:


*Voltage pulse duration must not exceed 10 μ s in a 525-line, 30-frame system.

†Absolute maximum value.

CBS ELECTRON TUBES




6AX5GT



Full-wave power rectifier for moderate current requirements

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.2 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	450 volts
Heater positive to cathode.....	450 volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Rectifier Service

Plate voltage, peak inverse.....	1250 volts
Plate current, peak steady state (each plate).....	375 amp
Plate current, hot-switching transient (for 0.2 sec. max.).....	2.6 amp

TYPICAL OPERATION

Full-Wave Rectifier (Capacitor Input Filter)

Plate supply voltage, rms (each plate).....	350	450 volts
Plate supply impedance (each plate).....	50	105 ohms
Filter input capacitort.....	10	10 μf
Output voltage at filter input, d-c		
At half-load current of 62.5 ma.....	395	volts
40.0 ma.....		540 volts
At full-load current of 125 ma.....	350	volts
80 ma.....		490 volts
Voltage regulation (approx.)		
Half-load to full-load current.....	45	50 volts

Full-Wave Rectifier (Choke Input Filter)

Plate supply voltage, rms (each plate).....	700	900 volts
Filter input choke.....	10	10 henrys
Output voltage at filter input, d-c		
At half-load current of 75 ma.....	270	volts
62.5 ma.....		365 volts
At full-load current of 150 ma.....	250	volts
125 ma.....		350 volts
Voltage regulation (approx.)		
Half-load to full-load current.....	20	15 volts

NOTES:

†Higher values may be used but the effective plate supply impedance may have to be increased to prevent exceeding the maximum rating for hot-switching transient plate current.

6AX6G

(See chart for seldom-used tubes)




6AX8



Combined sync separator and video amplifier for TV receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	Shield†
Grid to plate: g1 to p.....	1.8 $\mu\mu\text{f}$
Input: g1 to k + h.....	2.5 $\mu\mu\text{f}$
Output: p to k + h.....	1.0 $\mu\mu\text{f}$
Cathode to heater: k to h (approx.).....	3.5 $\mu\mu\text{f}$

Pentode Section

Grid to plate: g1 to p.....	0.006 $\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	5.0 $\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	3.5 $\mu\mu\text{f}$
Cathode to heater: k to h (approx.).....	3.5 $\mu\mu\text{f}$

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)


	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....	300 volts	
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.7	2.8 watts
Grid 2 dissipation.....	0.5 watts	

CHARACTERISTICS AND TYPICAL OPERATION

	Triode	Pentode
Plate voltage.....	150	250 volts
Grid 2 (screen) voltage.....	110 volts	
Cathode-bias resistor.....	56	120 ohms
Plate resistance (approx.).....	.005	0.40 meg
Transconductance.....	8500	4800 μmhos
Amplification factor.....	40	
Plate current.....	18	10 ma
Grid 2 current.....	3.5 ma	
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-12	-12 volts




6AZ8



**Triode sync separator, sync clipper, phase splitter,
pentode i-f video amplifier, agc amplifier**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.†	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

Grid to plate: g1 to p.....	1.7	μμf
Input: g1 to k + h + i.s.....	2	μμf
Output: p to k + h + i.s.....	1.7	μμf

Pentode Section

Grid to plate: g1 to p, max.....	0.02	μμf
Input: g1 to k + h + g2 + g3 + i.s.....	6.5	μμf
Output: p to k + h + g2 + g3 + i.s.....	2.2	μμf
Coupling: pentode grid 1 to triode plate, max.....	0.020	μμf
Coupling: pentode plate to triode grid, max.....	0.027	μμf
Coupling: pentode plate to triode plate, max.....	0.045	μμf

MAXIMUM RATINGS (Design center values)

Class A Amplifier

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....		300 volts
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.6	2 watts
Grid 2 dissipation, up to 150 volts.....		0.5 watt
Grid 2 dissipation, between 150 and 300 volts.....	See Rating Chart in APPENDIX	
Grid 1 circuit resistance‡		
Fixed bias.....	0.5	0.25 meg
Cathode bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

	Triode	Pentode
Plate supply voltage.....	200	200 volts
Grid 2 (screen) supply voltage.....		150 volts
Grid 1 (control-grid) voltage.....	-6	volts
Cathode-bias resistor.....		180 ohms
Plate resistance (approx.).....	5750	300,000 ohms
Transconductance.....	3300	6000 μmhos
Amplification factor.....	19	
Plate current.....	13	9.5 ma
Grid 2 current.....		3 ma
Grid 1 voltage (approx.) for I _b = 10 μa.....	-19	volts
Grid 1 voltage (approx.) for g _m = 100 μmhos..		-12.5 volts

NOTES:

†Pentode heater-cathode voltage should not exceed value of operating cathode bias because grid 3 is connected to heater, thus grid 3 could be negative with respect to cathode with possible change in tube characteristics.


‡If either unit is operated at maximum rated conditions, grid 1 circuit resistance for both units should not exceed the stated values.

6B4G • 6B5 • 6B6G • 6B7 • 6B8 • 6B8G/GT

(See chart for seldom-used tubes)




6BA6



Pentode amplifier for gain controlled r-f or i-f stages

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



Type 6BA6 is identical to type 3BA6 except for heater characteristics.

6BA7

(See chart for seldom-used tubes)



6BA8

6BA8A




Combined sync separator or sync clipper, etc. and video amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).	

*D-c component must not exceed 100 volts max.



CBS ELECTRON TUBES

6BA8 • 6BA8A (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	6BA8		6BA8A		
	Shield†	No Shield	Shield†	No Shield	
Grid to plate: g1 to p.....	2.2	2.2	2.2	2.2	μμf
Input: g1 to k + h.....	2.7	2.5	2.7	2.5	μμf
Output: p to k + h.....	1.9	0.4	1.9	0.4	μμf
Pentode Section					
Grid to plate: g1 to p.....	.030m	.036m	.03	.04	μμf
Input:					
g1 to k + h + g2 + g3 + i.s.	9.5	9.5	10.0	10.0	μμf
Output:					
p to k + h + g2 + g3 + i.s.	3.6	2.8	4.5	3.6	μμf
Coupling					
Pentode grid 1 to triode plate	.005m	.010m	.003	.006	μμf
Pentode plate to triode grid	.012m	.022m	.006	.016	μμf
Pentode plate to triode plate	.050m	0.20m	.023	.150	μμf

†JETEC shield 315 connected to cathode of section tested.

M=Maximum value.

MAXIMUM RATINGS (Design center values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....	300 volts	
Grid 1 voltage, positive d-c.....	0 volts	
Grid 1 voltage, negative d-c.....	50 volts	
Plate dissipation.....	2.0	3.25 watts
Grid 2 dissipation.....	1.0 watts	
Grid 1 circuit resistance		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION


Class A Amplifier	Triode	Pentode
Plate voltage.....	200	200 volts
Grid 2 (screen) voltage.....		150 volts
Grid 1 (control-grid) voltage.....	-8	0 volts
Cathode-bias resistor.....		180 ohms
Plate resistance (approx.).....	6700	400,000 ohms
Transconductance.....	2700	9000 μmhos
Amplification factor.....	18	
Plate current.....	8.0	13 ma
Grid 2 current.....		3.5 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu a$	-16	-10 volts

6BA8A †


Zero bias: with $E_b = 65V$, $E_{c2} = 150V$ (instantaneous values)		
Plate current.....	42	ma
Grid 2 current.....	12.5	ma

NOTE:

†Type 6BA8A features a controlled plate knee characteristic.

CBS**6BC4****Uhf amplifier for cathode drive circuits****HEATER CHARACTERISTICS**

Voltage, a-c or d-c.....	6.3 volts
Current.....	225 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	75 volts
Heater positive to cathode.....	75 volts

**ELECTRICAL DATA****DIRECT INTERELECTRODE CAPACITANCES**

Grid to plate: g1 to p.....	1.6	$\mu\mu\text{f}$
Input: g1 to k + h.....	2.9	$\mu\mu\text{f}$
Output: p to k + h.....	0.26	$\mu\mu\text{f}$
Heater to cathode: h to k.....	2.7	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)


Plate voltage.....	250 volts
Plate dissipation.....	2.5 watts
Cathode current.....	25 ma
Control-grid circuit resistance	
Fixed bias.....	not recommended
Self bias.....	0.5 meg

CHARACTERISTICS**Class A Amplifier**

Plate supply voltage.....	150 volts
Cathode-bias resistor.....	100 ohms
Plate resistance (approx.).....	4800 ohms
Transconductance.....	10,000 μmhos
Amplification factor.....	48
Plate current.....	14.5 ma
Control-grid voltage (approx.) for $I_b = 10 \mu\text{a}$	-10 volts

**6BC5****R-f or i-f amplifier capable of high frequency operation****HEATER CHARACTERISTICS**

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



Type 6BC5 is identical to type 3BC5 except for heater ratings.

CBS ELECTRON TUBES




6BC7



D-c restorer for tricolor TV or combined f-m discriminator and a-m detector

HEATER CHARACTERISTICS

Voltage.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode.....	200 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Plate Diode 1 to all other elements.....	3.5	$\mu\mu\text{f}$
Plate Diode 2 to all other elements.....	5.5	$\mu\mu\text{f}$
Plate Diode 3 to all other elements.....	3.5	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values, each section)

Plate voltage, peak inverse.....	330	volts
Plate current, d-c.....	12	ma
Plate current, peak.....	54	ma

AVERAGE CHARACTERISTICS

Plate current, $E_b = 5$ volts, $R_L = 0 \Omega$		
Diode 1, 2 and 3.....	35	ma
Plate current, $E_b = 0$ volts, $R_L = 40,000 \Omega$		
Diode 1, 2 and 3.....	21	μa
Plate current ratio, $E_b = 5$ volts, $R_L = 40,000 \Omega$		
Diode 1/Diode 3.....	1.3	max
Diode 3/Diode 1.....	1.3	max



6BC8




Gain-controlled very-high-frequency cascode amplifier for TV tuners

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	400	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode*.....	200	volts
Heater positive to cathode*.....	200	volts

*D-c component must not exceed 100 volts.



*This rating may be as high as 300 volts under cutoff conditions when the tube is used as a cascode amplifier and the two sections are connected in series.

Type 6BC8 is identical to type 4BC8 except for heater characteristics.




6BD4A



High-voltage regulator for color TV picture tube anode supplies

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	200	ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	180	volts
Heater positive to cathode.....	180	volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.03	$\mu\mu\text{f}$
Input: g1 to k + h.....	2.6	$\mu\mu\text{f}$
Output: p to k + h.....	1.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage, d-c.....	25,000	volts
Plate supply voltage, unregulated d-c.....	55,000	volts
Grid voltage, d-c.....	-125	volts
Grid voltage, peak.....	-550	volts
Plate current.....	1.5	ma
Plate dissipation.....	25	watts
Grid circuit resistance With unregulated supply resistance of at least 8 meg....	4	meg

TYPICAL OPERATION

Shunt Regulator


Unregulated supply voltage with 8 meg. equivalent resistance.....	29,800	volts
Reference supply voltage with 1K equivalent resistance.....	500	volts
Transconductance, effective grid to plate.....	138	μmhos
Plate current at 0 ma load, d-c.....	1,055	μa
Plate current at 1 ma load, d-c.....	100	μa
Regulated output voltage at 0 ma load, d-c.....	20,000	volts
Regulated output voltage at 1 ma load, d-c.....	19,700	volts

6BD5GT

(See chart for seldom-used tubes)




6BD6



Gain controlled radio-frequency or intermediate-frequency amplifier for radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p, max.....	0.005	0.004	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3 + i.s.....	4.3	4.3	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3 + i.s.....	5.0	5.0	$\mu\mu\text{f}$

†JETEC shield 316 connected to cathode

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 voltage.....	125 volts
Plate dissipation.....	3.0 watts
Grid 2 dissipation.....	0.65 watt
Cathode current.....	14 ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	125	250 volts
Grid 3 (suppressor).....	connected to cathode at socket		
Grid 2 (screen) voltage.....	100	125	100 volts
Grid 1 (control-grid) voltage.....	-1	-3	-3 volts
Plate resistance (approx.).....	0.15	0.18	0.8 meg
Transconductance.....	2550	2350	2000 μmhos
Plate current.....	13	13	9 ma
Grid 2 current.....	5	5	3 ma
Grid 1 voltage (approx.) for $g_m = 10 \mu\text{mhos}$	-35	-45	-35 volts

6BD7

(See chart for seldom-used tubes)




6BE6



Radio-frequency converter in superheterodyne radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



Type 6BE6 is identical to type 3BE6 except for heater ratings.



6BE8

6BE8A



Vhf triode oscillator—pentode mixer for television tuners


HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.

6BE8A

Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).



Types 6BE8 and 6BE8A are identical to type 5BE8 except for heater characteristics.



6BF5




Audio power amplifier or TV vertical deflection amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.2 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



CBS ELECTRON TUBES

6BF5 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

		Triode Connected	
Grid to plate: g1 to p.	0.65	7.5	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.	14	7	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.	6	6	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

	Class A Amplifier	Vertical Deflection Triode Connected*
Plate voltage, d-c.	250	250 volts
Plate voltage, peak pos. (absolute max.)		900 volts
Plate dissipation	5.5	5.0† watts
Grid 2 dissipation	1.25	watts
Grid 2 voltage	117	250 volts
Grid 1 voltage, peak negative		-250 volts
Cathode current, average		40 ma
Cathode current, peak		120 ma
Control-grid circuit resistance		2.2 meg

AVERAGE CHARACTERISTICS AND TYPICAL OPERATION

	Triode Connected	Class A Amplifier
Plate voltage	225	110 volts
Grid 2 voltage	225	110 volts
Grid 1 voltage	-30	-7.5 volts
Grid 1 voltage, peak a-f.		7.5 volts
Plate current, zero signal	10	36.0 ma
Plate current, max. signal		39.0 ma
Grid 2 current, zero signal		4.0 ma
Grid 2 current, max. signal		10.5 ma
Plate resistance	2500	12,000 ohms
Transconductance	2700	7500 μmhos
Load resistance		2500 ohms
Power output, max. signal		1.9 watts
Total harmonic distortion (approx.)		10 %
Amplification factor	6.7	
Grid voltage (approx.) for $I_b = 0.5$ ma.	-40	volts

NOTES:

*Voltage pulse duration must not exceed 2500 μs in a 525-line 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.




6BF6



Combined detector, avc, and audio driver tube in automobile radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.	6.3 volts
Current.	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.	90 volts
Heater positive to cathode.	90 volts



CBS ELECTRON TUBES

6BF6 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	Shield†	No Shield	
Grid to plate: g1 to p, max.	2.0	2.0	$\mu\mu\text{f}$
Input: g1 to k + h.	1.8	1.8	$\mu\mu\text{f}$
Output: p to k + h.	1.1	0.8	$\mu\mu\text{f}$
Diode 1 plate to cathode	1.4	0.7	$\mu\mu\text{f}$
Diode 2 plate to cathode	1.5	0.1	$\mu\mu\text{f}$
Diode 1 plate to triode grid, max.	0.06	0.07	$\mu\mu\text{f}$
Diode 2 plate to triode grid, max.	0.05	0.06	$\mu\mu\text{f}$

†JETEC shield 316 connected to cathode

MAXIMUM RATINGS (Design center values)

Plate voltage	300 volts
Plate dissipation	2.5 watts
Plate current (for each diode)	1.0 ma

TYPICAL OPERATION

Class A Amplifier with transformer coupling

Plate voltage	250 volts
Grid 1 (control-grid) voltage*	-9 volts
Load resistance	10,000 ohms
Plate resistance (approx.)	8500 ohms
Transconductance	1900 μmhos
Amplification factor	16
Plate current	9.5 ma
Power output	300 mw
Total harmonic distortion	6.5 %
Diode current with 10 volts d-c applied (each plate)	0.8 ma

NOTES:

*Diode biasing of the triode is not suitable.

6BF7

(See chart for seldom-used tubes)



6BG6G

6BG6GA




Horizontal deflection amplifier for television receiver sweep circuits

HEATER CHARACTERISTICS

Voltage, a-c or d-c.	6.3 volts
Current	0.9 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts

*D-c component must not exceed 100 volts max.



CBS ELECTRON TUBES

6BG6G • 6BG6GA (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.34	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	12	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	6.5	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

Horizontal Deflection Amplifier*

Plate supply voltage, d-c (boost + d-c power supply)...	700	volts
Plate voltage, peak pos. (absolute max.).....	6600	volts
Plate voltage, peak negative pulse.....	1500	volts
Grid 2 voltage, d-c.....	350	volts
Grid 1 voltage.....	-50	volts
Grid 1 voltage, peak negative.....	300	volts
Plate dissipation†.....	20	watts
Grid 2 dissipation.....	3.2	watts
Cathode current, average.....	110	ma
Cathode current, peak.....	400	ma
Grid 1 circuit resistance.....	0.47	meg
Bulb temperature at hottest point.....	210	°C

AVERAGE CHARACTERISTICS

Instantaneous values

Plate voltage.....	60	250	volts
Grid 2 (screen) voltage.....	250	250	volts
Grid 1 (control-grid) voltage.....	0	-15	volts
Plate resistance (approx.).....		25,000	ohms
Transconductance.....		6000	μmhos
Plate current.....	180	75	ma
Grid 2 current.....	18	4.0	ma
Grid 1 voltage (approx.) for $I_b = 1$ ma.....		-45	volts
Triode amplification factor (p + g2 tied together).....		8	

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.

6BG7

(See chart for seldom-used tubes)




6BH6



Radio frequency amplifier for equipment in which low heater current is important

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p, max.....	0.0035	0.0035	μμf
Input: g1 to k + h + g2 + g3 + i.s.....	5.4	5.4	μμf
Output: p to k + h + g2 + g3 + i.s.....	4.4	4.4	μμf

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX
Grid 2 supply voltage.....	300 volts
Grid 1 voltage, negative d-c.....	50 volts
Grid 1 voltage, positive d-c.....	0 volts
Plate dissipation.....	3.0 watts
Grid 2 dissipation	
For grid 2 voltages up to 150 volts.....	0.5 watt
For grid 2 voltages between 150 and 300 volts.....	See Rating Chart in APPENDIX

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....	100	150 volts
Grid 1 (control-grid) voltage.....	-1	-1 volts
Plate resistance (approx.).....	0.7	1.4 meg
Transconductance.....	3400	4600 μmhos
Plate current.....	3.6	7.4 ma
Grid 2 current.....	1.4	2.9 ma
Grid 1 voltage (approx.) for I _b = 10 μa.....	-5	-7.7 volts




6BH8



Combined sync separator, clipper, amplifier or sweep oscillator and i-f or video amplifier

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

- Grid to plate: g1 to p..... 2.4 $\mu\mu\text{f}$
- Input: g1 to k + h..... 2.6 $\mu\mu\text{f}$
- Output: p to k + h..... 0.38 $\mu\mu\text{f}$

Pentode Section

- Grid to plate: g1 to p..... 0.046 $\mu\mu\text{f}$
- Input: g1 to k + h + g2 + g3..... 7.0 $\mu\mu\text{f}$
- Output: p to k + h + g2 + g3..... 2.4 $\mu\mu\text{f}$
- Coupling: pentode grid 1 to triode plate..... 0.004 $\mu\mu\text{f}$
- Coupling: pentode plate to triode grid..... 0.016 $\mu\mu\text{f}$
- Coupling: pentode plate to triode plate..... 0.095 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

	Triode*	Pentode
Plate voltage.....	300	300 volts
Grid 2 supply voltage.....		300 volts
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.5	3.0 watts
Grid 2 dissipation.....		1.0 watts
Grid 1 circuit resistance		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

	Triode*	Pentode
Plate voltage.....	150	200 volts
Grid 2 (screen) voltage.....		125 volts
Grid 1 (control-grid) voltage.....	-5.0	volts
Cathode-bias resistor.....		82 ohms
Plate resistance (approx.).....	5150	150,000 ohms
Transconductance.....	3300	7000 μmhos
Amplification factor.....	17	
Plate current.....	9.5	15 ma
Grid 2 current.....		3.4 ma
Grid 1 voltage (approx.) for $I_b = 100 \mu\text{a}$	-14	-8.0 volts

NOTE:

*May be diode connected (grid tied to plate or plate grounded) for video detector use.




6BJ6



Radio-frequency amplifier for equipment in which low heater current is important

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	150 ma
Peak heater-cathode voltage, max.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p, max.....	0.0035	0.0035	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	4.5	4.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	5.5	5.5	$\mu\mu\text{f}$

†JETEC shield 316 connected to pins 2 and 7.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 voltage.....	125 volts
Grid 2 supply voltage.....	300 volts
Grid 1 voltage, negative d-c.....	-50 volts
Grid 1 voltage, positive d-c.....	0 volts
Plate dissipation.....	3.0 watts
Grid 2 dissipation.....	0.6 watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....	100	100 volts
Grid 1 (control-grid) voltage.....	1.0	1.0 volts
Plate resistance (approx.).....	0.25	1.3 meg
Transconductance.....	3650	3600 μmhos
Plate current.....	9.0	9.2 ma
Grid 2 current.....	3.5	3.3 ma
Grid 1 voltage (approx.) for $g_m = 10 \mu\text{mhos}$	-20	-20 volts




6BJ7



D-c restorer for the separate video signals in tricolor television

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	0.45 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	330 volts
Heater positive to cathode.....	100 volts



CBS ELECTRON TUBES

6BJ7 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Plate 1 to cathode 1 + heater + i.s.....	3.0	$\mu\mu\text{f}$
Plate 2 to cathode 2 + heater + i.s.....	2.8	$\mu\mu\text{f}$
Plate 3 to cathode 3 + heater + i.s.....	2.8	$\mu\mu\text{f}$
Cathode 1 to plate 1 + heater + i.s.....	3.8	$\mu\mu\text{f}$
Cathode 2 to plate 2 + heater + i.s.....	4.0	$\mu\mu\text{f}$
Cathode 3 to plate 3 + heater + i.s.....	3.8	$\mu\mu\text{f}$
Plate 1 to plate 2.....	0.055	$\mu\mu\text{f}$
Plate 2 to plate 3.....	0.036	$\mu\mu\text{f}$
Plate 3 to plate 1.....	0.038	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

TV D-c Restorer Service

Plate voltage, peak inverse.....	330	volts
Output current, d-c (each plate).....	1.0	ma
Plate current, peak steady state (each plate).....	10	ma

CHARACTERISTICS

Tube Voltage Drop

Conducting 10 ma (each plate).....	2.7	volts
------------------------------------	-----	-------




6BK4



**High-voltage regulator for color TV
picture tube anode supplies**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	200	ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	225	volts
Heater positive to cathode.....	not recommended	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.03	$\mu\mu\text{f}$
Input: g1 to k + h.....	2.6	$\mu\mu\text{f}$
Output: p to k + h.....	1.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage, d-c.....	25,000	volts
Plate supply voltage, unregulated d-c.....	55,000	volts
Grid voltage, d-c.....	-125	volts
Grid voltage, peak.....	-400	volts
Plate current.....	1.5	ma
Plate dissipation.....	25	watts
Grid circuit resistance For use with flyback transformer high voltage supply..	3.0	meg

CBS ELECTRON TUBES

6BK4 (cont.)

CHARACTERISTICS

Grid voltage (1), min.*	-7 volts
Grid voltage (2), max.†	-40 volts
Grid voltage change, max. ‡	9 volts

*With $E_b = 30,000V$ and $I_b = 1$ ma.

†With $E_b = 30,000V$ and $I_b = 0.1$ ma.

‡Difference between grid voltages (1) and (2).

CBS

6BK5




General purpose power amplifier for service where driving voltage is limited

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	1.2 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts

*D-c component must not exceed 100 volts, max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p	0.6 $\mu\mu f$
Input: g1 to k + h + g2 + b.p.	13 $\mu\mu f$
Output: p to k + h + g2 + b.p.	5.0 $\mu\mu f$

MAXIMUM RATINGS (Design center values)

Plate voltage	250 volts
Grid 2 voltage	250 volts
Grid 1 voltage, peak positive	0 volts
Plate dissipation	9.0 watts
Grid 2 dissipation	2.5 watts
Grid 1 circuit resistance	
Fixed bias	0.1 meg
Self bias	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	250 volts
Grid 2 (screen) voltage	250 volts
Grid 1 (control-grid) voltage	-5.0 volts
Plate resistance (approx.)	100,000 ohms
Transconductance	8500 $\mu mhos$
Grid 1 input voltage, peak a-f.	5.0 volts
Plate current, zero signal	35 ma
Plate current, maximum signal (approx.)	37 ma
Grid 2 current, zero signal	3.5 ma
Grid 2 current, maximum signal (approx.)	10 ma
Load resistance impedance	6500 ohms
Total harmonic distortion (approx.)	7 %
Power output, maximum signal	3.5 watts

CBS ELECTRON TUBES


6BK6

(See chart for seldom-used tubes)



6BK7A

6BK7B




**Very-high-frequency cascode amplifier
used in TV tuners†**

HEATER CHARACTERISTICS

Voltage, a-c or d-c†.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode*.....	200 volts
Heater positive to cathode▲.....	200 volts

*In series cascode application the grounded stage value can be 300V max. under cutoff conditions.

▲D-c component must not exceed 100 volts max.



Types 6BK7A and 6BK7B are identical to type 5BK7A except for heater characteristics.

†Type 6BK7A is a direct replacement for the 6BK7.

‡6BK7B is heater warm-up time controlled to 11 secs. average for use in 450 ma series heater strings.



6BL4




**High-voltage half-wave TV damper diode
for horizontal-deflection circuits**

HEATER CHARACTERISTICS

Voltage.....	6.3 volts
Current.....	3.0 amps
Peak heater-cathode voltage, max.*	
Heater negative to cathode†.....	4500 volts
Heater positive to cathode*.....	300 volts

†D-c component must not exceed 900 volts max.

*D-c component must not exceed 100 volts max.



6BL4 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Heater to cathode: h to k.....	5.0	$\mu\mu\text{f}$
Cathode to plate-and-heater: k to p + h.....	16	$\mu\mu\text{f}$
Plate to cathode-and-heater: p to k + h.....	11.5	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

TV Dampner Service*

Plate voltage, peak inverse†.....	4500	volts
Plate current, d-c.....	200	ma
Plate current, peak.....	1200	ma
Plate dissipation.....	8.0	watts

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

†Absolute maximum value.



6BL7GT




Vertical deflection amplifier and/or oscillator for television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	1.5	amp
Peak heater-cathode voltage, max. Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts

*D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2	
Grid to plate: g1 to p.....	6.0	6.0	$\mu\mu\text{f}$
Input: g1 to k + h.....	4.2	4.6	$\mu\mu\text{f}$
Output: p to k + h.....	0.9	0.9	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)*

Vertical Deflection Service	Amplifier	Oscillator	
Plate voltage, d-c.....	500	500	volts
Plate voltage, peak pos. (absolute max.)....	2000		volts
Plate voltage, peak negative.....		400	volts
Control-grid voltage, peak negative.....	250		volts
Plate dissipation (each plate)†.....	10	10	watts
Plate dissipation (total for both plates)†.....	12	12	watts
Cathode current, average.....	60	60	ma
Cathode current, peak.....	210	210	ma
Control-grid circuit resistance.....	2.2	2.2	meg

CBS ELECTRON TUBES

6BL7GT (cont.)

CHARACTERISTICS

Each Section

Plate voltage.....	250 volts
Grid voltage.....	-9 volts
Plate current (1).....	40 ma
Transconductance.....	7000 μ mhos
Amplification factor.....	15
Plate resistance, approx.....	2150 ohms
Plate current (2) at $E_c = -17V$	4.0 ma
Grid voltage, approx., for $I_b = 50 \mu a$	-23 volts

NOTES:

*Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.




6BN4



R-f amplifier in vhf television tuners

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	200 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	100 volts
Heater positive to cathode.....	100 volts



7EG

Type 6BN4 is identical to types 2BN4 and 3BN4 except for heater characteristics. See type 2BN4 for ratings and operating characteristics.




6BN6



Gated-beam tube for service as f-m discriminator, limiter, and audio amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



7DF

Type 6BN6 is identical to type 3BN6 except for heater ratings.

6BN7


(See chart for seldom-used tubes)

CBS ELECTRON TUBES



6BQ6GT


6BQ6GA • 6BQ6GTA
6BQ6GTB



Horizontal deflection amplifier for television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.2 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	6BQ6GA	6BQ6GT 6BQ6GTA 6BQ6GTB
Grid to plate: g1 to p.....	0.6	0.6 $\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	15	15 $\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	7	7.0 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted) Horizontal Deflection Amplifier*

	6BQ6GTB	6BQ6GTA	6BQ6GT
Plate supply voltage, d-c (boost + d-c power supply)....	600	600	550 volts
Plate voltage, peak pos. (absolute max.).....	6000	6000	5500 volts
Plate voltage, peak negative pulse.....	1250	1250	1250 volts
Grid 2 voltage, d-c.....	200	200	175 volts
Grid 1 voltage, peak negative....	300	300	300 volts
Plate dissipation†.....	11	11	11 watts
Grid 2 dissipation.....	2.5	2.5	2.5 watts
Cathode current, av.....	110	110	110 ma
Cathode current, peak.....	400	400	400 ma
Grid 1 circuit resistance.....	0.47	0.47	0.47 meg
Bulb temperature at hottest point 220°C for 6BQ6GT, 6BQ6GTA, 6BQ6GTB and 6BQ6GA			

AVERAGE CHARACTERISTICS

	6BQ6GTB	6BQ6GA 6BQ6GT 6BQ6GTA
Plate voltage.....	250	250 volts
Grid 2 (screen) voltage.....	150	150 volts
Grid 1 (control-grid) voltage.....	-22.5	-22.5 volts
Plate resistance (approx.).....	14,500	14,500 ohms
Transconductance.....	5900	5900 μmhos
Plate current.....	57	55 ma
Grid 2 current.....	2.1	2.1 ma
Grid 1 voltage (approx.) for $I_b = 1.0$ ma....	-43	-43 volts

6BQ6GT • 6BQ6GA • 6BQ6GTA • 6BQ6GTB (cont.)

Instantaneous Values	6BQ6GA 6BQ6GT	
	6BQ6GTB	6BQ6GTA
Plate voltage.....	60	60 volts
Grid 2 (screen) voltage.....	150	150 volts
Grid 1 (control-grid) voltage.....	0	0 volts
Plate current.....	260	260 ma
Grid 2 current.....	26	26 ma

Triode Connected

Plate and grid 2 voltage (p + g2 tied together).....	150	volts
Grid 1 voltage.....	-22.5	volts
Amplification factor.....	4.3	

TYPICAL OPERATION

Horizontal Deflection for 70° Picture Tube

Plate supply voltage (boost + d-c supply).....	465	volts
Plate voltage, peak positive (d-c + pulse).....	3440	volts
Grid 2 (screen) voltage.....	140	volts
Grid 1 (control-grid) voltage, d-c.....	-28	volts
Grid 1 (control-grid) input voltage		
Sawtooth component, peak-to-peak.....	74	volts
Negative peaking component.....	18	volts
Plate current, average.....	83	ma
Grid 2 (screen) current.....	12.3	ma
Plate dissipation.....	5.1	watts
Grid 1 resistance.....	0.33	meg
Anode voltage of CRT.....	14	kv

NOTES:

*Voltage pulse duration must not exceed 10 μ s in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.



6BQ7A




**High-gain, low-noise vhf cascode amplifier
in television tuners**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	400	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode*	200	volts
Heater positive to cathode.....	200	volts

*This may be as high as 300 volts under cutoff conditions in r-f grounded grid circuit with direct coupled drive.



Type 6BQ7A is identical to type 4BQ7A except for heater characteristics.

CBS ELECTRON TUBES



6BR8




Vhf local oscillator and mixer for fm and television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	250 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



Type 6BR8 is identical to type 5BR8 except for heater characteristics.




6BS8



Low-noise vhf amplifier for cascode amplifier operation

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	400 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode.....	200 volts



Type 6BS8 is identical to type 4BS8 except for heater characteristics.

6BT6 • 6BU5 • 6BU6

(See chart for seldom-used tubes)




6BU8



Duopentode for combined sync and agc in television receivers

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
- Heater negative to cathode..... 200 volts
- Heater positive to cathode*..... 200 volts
- *D-c component must not exceed 100 volts max.



Type 6BU8 is identical to type 3BU8 except for heater characteristics.




6BV8



Combined synchronous detector and chrominance amplifier for color TV receivers

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
- Heater negative to cathode..... 200 volts
- Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode

- Grid to plate: g1 to p..... 2.0 $\mu\mu\text{f}$
- Input: g1 to k + h..... 3.6 $\mu\mu\text{f}$
- Output: p to k + h..... 0.4 $\mu\mu\text{f}$

Diode

- Diode 1 plate to diode 1 cathode and heater..... 2.4 $\mu\mu\text{f}$
- Diode 2 plate to diode 2 cathode and heater..... 2.4 $\mu\mu\text{f}$

Coupling:

- Triode grid to diode 1 plate, max..... 0.03 $\mu\mu\text{f}$
- Triode grid to diode 2 plate, max..... 0.07 $\mu\mu\text{f}$

6BV8 (cont.)

MAXIMUM RATINGS (Design center values)


Plate voltage.....	330	volts
Control-grid voltage, positive d-c.....	0	volts
Plate dissipation.....	2.7	watts
Diode current for continuous operation, each diode.....	10	ma
Control-grid circuit resistance		
Fixed bias.....	0.1	meg
Self bias.....	0.5	meg

CHARACTERISTICS AND TYPICAL OPERATION

Plate voltage.....	75	200	volts
Control-grid voltage.....	0		volts
Cathode-bias resistor.....		330	ohms
Plate resistance (approx.).....		5900	ohms
Transconductance.....		5600	μmhos
Amplification factor.....		33	
Plate current.....	14	11	ma
Control-grid voltage (approx.) for $I_b = 100 \mu\text{a}$		-11	volts
Average diode current, with 5 volts applied (each diode).....		23	ma




6BX7GT



**Vertical deflection amplifier and/or oscillator
for television receivers**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	1.5	amp
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
*D-c component 100 volts max.		



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1 ‡	Section 2	
Grid to plate: g1 to p.....	4.2	4.0	$\mu\mu\text{f}$
Input: g1 to k + h.....	4.4	4.8	$\mu\mu\text{f}$
Output: p to k + h.....	1.1	1.2	$\mu\mu\text{f}$
Grid to grid.....		0.11	$\mu\mu\text{f}$
Plate to plate.....		1.5	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)*

	Oscillator ‡	Amplifier	
Plate voltage, d-c.....	500	500	volts
Plate voltage, peak pos. (absolute max.).....		2000	volts
Plate voltage, peak negative.....	400	250	volts
Plate dissipation (each plate) †.....	10	10	watts
Plate dissipation (total for both plates) †.....	12	12	watts
Cathode current, average.....	60	60	ma
Cathode current, peak.....	180	180	ma
Control-grid circuit resistance, self bias.....	2.2	2.2	meg

CBS ELECTRON TUBES

6BX7GT (cont.)

AVERAGE CHARACTERISTICS

Instantaneous Values

Plate voltage.....	100	250 volts
Control-grid voltage.....	0	volts
Cathode resistor.....		390 ohms
Plate resistance (approx.).....		1300 ohms
Transconductance.....		7600 μ mhos
Amplification factor.....		10
Plate current.....	80	42 ma
Grid 1 voltage (approx.) for $I_b = 50 \mu$ a.....		-40 volts

NOTES:

*Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.

‡Oscillator service is recommended for section 1 (Pins 4, 5, and 6).

6BY5G

(See chart for seldom-used tubes)




6BY5GA



Full-wave power rectifier or TV damper†

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.6 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	450 volts
Heater positive to cathode.....	100 volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values unless noted) Rectifier and Damper Service*

Plate voltage, peak inverse, absolute max. (each plate)	
Rectifier.....	1400 volts
Damper.....	3000 volts
Output current, d-c.....	175 ma
Plate current, peak steady state (each plate).....	0.525 amp

CHARACTERISTICS Tube Voltage Drop

Conducting 175 ma (each plate).....	32 volts
-------------------------------------	----------

TYPICAL OPERATION

Full-Wave Rectifier (Capacitor Input Filter)

Plate supply voltage, rms (each plate).....	375 volts
Plate supply resistance (each plate).....	100 ohms
Filter input capacitor.....	8.0 μ f
Output current, d-c.....	175 ma
Output voltage at filter input, d-c.....	380 volts

NOTES:

*In damper applications, voltage pulse duration must not exceed 10 μ s in a 525-line, 30-frame system.

†Type 6BY5G, except for its ST-14 bulb, is identical to type 6BY5GA.




6BY6



Gated amplifier for service as a sync separator or clipper in color television receivers

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- *D-c component must not exceed 100 volts max.



Type 6BY6 is identical to type 3BY6 except for heater ratings.




6BY8



R-f and i-f amplifier combined with a diode detector, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield†

Pentode

- Grid to plate: g1 to p, max..... .0035 $\mu\mu\text{f}$
- Input: g1 to k + h + g2 + g3 + i.s..... 5.5 $\mu\mu\text{f}$
- Output: p to k + h + g2 + g3 + i.s..... 5.0 $\mu\mu\text{f}$

Diode

- Diode plate to all..... 4.8 $\mu\mu\text{f}$

†JETEC shield 315 connected to pentode cathode

MAXIMUM RATINGS (Design center values)

Pentode

- Plate voltage..... 300 volts
- Grid 2 voltage..... See Rating Chart in APPENDIX
- Grid 2 supply voltage..... 300 volts
- Grid 1 voltage, negative d-c..... -50 volts
- Grid 1 voltage, positive d-c..... 0 volts
- Plate dissipation..... 3.0 watts
- Grid 2 dissipation..... 0.65 watt

Diode

- Plate voltage, peak inverse..... 430 volts
- Plate current, peak..... 180 ma
- D-c current..... 45 ma

CBS ELECTRON TUBES

6BY8 (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier—(Pentode Section)

Plate voltage.....	100	250 volts
Grid 3 (suppressor).....	connect to pentode cathode at socket	
Grid 2 (screen) voltage.....	100	150 volts
Cathode bias resistor.....	150	68 ohms
Plate resistance (approx.).....	0.5	1.0 meg
Transconductance.....	3900	5200 μ mhos
Plate current.....	5.0	10.6 ma
Grid 2 current.....	2.1	4.3 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-4.2	-6.5 volts

Diode Section

Average diode current at 10 volts, d-c.....	60	ma
---	----	----



6BZ6




Intermediate-frequency amplifier for gain-controlled stages in TV receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



Type 6BZ6 is identical to type 3BZ6 except for heater ratings.



6BZ7




High-gain, low-noise cascode amplifier in television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	400 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode*.....	200 volts
Heater positive to cathode†.....	200 volts

*This may be as high as 300 volts under cutoff conditions in r-f grounded grid circuit with direct coupled drive.

†D-c component must not exceed 100 volts.



Type 6BZ7 is identical to type 4BZ7 except for heater characteristics.

CBS ELECTRON TUBES




6BZ8



Gain-controlled low-noise vhf cascode amplifier for television tuners

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	400 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode.....	200 volts



Type 6BZ8 is identical to type 4BZ8 except for heater characteristics.



6C4




High-frequency oscillator or Class C radio-frequency amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	1.6	μμf
Input: g1 to k + h.....	1.8	μμf
Output: p to k + h.....	1.3	μμf

MAXIMUM RATINGS (Design center values)

	Class C Telegr. †	Class A Amp.
Plate voltage.....	300	300 volts
Plate dissipation.....	5.0	3.5 watts
Plate current.....		25 ma
Grid current.....		8.0 ma
Control-grid circuit resistance		
Fixed bias.....		0.25 meg
Self bias.....		1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

	Class C Telegr. †	Class A Amp.	
Plate voltage.....	300	100	250 volts
Control-grid voltage.....	-27	0	-8.5 volts
Plate resistance (approx.).....		6250	7700 ohms
Transconductance.....		3100	2200 μmhos
Amplification factor.....		19.5	17
Plate current.....	25	11.8	10.5 ma
Grid current.....	8		ma
Drive power.....	.35		watt
Output.....	5.5		watts


NOTE:

†For use in Class C Telegraphy operation as an r-f power amplifier and oscillator with typical operation up to 50 megacycles. Approximately 2.5 watts output can be obtained when the 6C4 is operated as a 150 mc oscillator with a 10000 ohm grid resistor at full input.



6C5


6C5GT



General purpose triode for use as an oscillator, detector, or amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES†

Grid to plate: g1 to p.....	1.6	μμf
Input: g1 to k + h.....	3.6	μμf
Output: p to k + h.....	11.0	μμf

†With shell or shield connected to the cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Control-grid voltage, positive d-c.....	0 volts
Plate dissipation.....	2.5 watts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	250 volts
Control-grid voltage.....	-8.0 volts
Plate resistance (approx.).....	10 kilohms
Transconductance.....	2000 μmhos
Amplification factor.....	20
Plate current.....	8.0 ma

6C6 • 6C7 • 6C8G

(See chart for seldom-used tubes)

CBS ELECTRON TUBES



6CA5




**A-f power amplifier with high output
from a low B supply voltage**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1200 ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.5	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	15.0	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	9.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	130 volts
Grid 2 voltage.....	130 volts
Grid voltage, peak positive.....	0 volts
Plate dissipation.....	5.0 watts
Grid 2 dissipation.....	1.4 watts
Grid circuit resistance	
Fixed bias.....	0.5 meg
Self bias.....	0.5 meg
Bulb temperature at hottest point.....	180 °C

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	110	125 volts
Grid 2 (screen) voltage.....	110	125 volts
Grid 1 (control-grid) voltage.....	-4.0	-4.5 volts
Plate resistance (approx.).....	16,000	15,000 ohms
Transconductance.....	8100	9200 μmhos
Grid 1 input voltage, peak a-f.....	4.0	4.5 volts
Plate current, zero signal.....	32	37 ma
Plate current, maximum signal.....	31	36 ma
Grid 2 current, zero signal.....	3.5	4.0 ma
Grid 2 current, maximum signal.....	7.5	11.0 ma
Load resistance impedance.....	3500	4500 ohms
Total harmonic distortion (approx.).....	5	6 %
Power output, maximum signal.....	1.1	1.5 watts



6CB5

6CB5A




Horizontal deflection amplifier for tricolor television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	2.5 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	6CB5	6CB5A	
Grid to plate: g1 to p.....	0.8	0.4	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	24	22	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	10	10	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

Horizontal Deflection Amplifier*	6CB5	6CB5A	
Plate supply voltage, d-c (boost + d-c power supply).....	700	800	volts
Plate voltage, peak pos. (absolute max.)... ..	6800	6800	volts
Plate voltage, peak negative pulse.....	1500	1500	volts
Grid 2 voltage, d-c.....	200	200	volts
Grid 1 voltage, peak negative.....	200	200	volts
Grid 1 voltage, d-c.....	-50	-50	volts
Plate dissipation†.....	23	23	watts
Grid 2 dissipation.....	3.6	3.6	watts
Cathode current, average.....	200	220	ma
Cathode current, peak.....	—	770	ma
Grid 1 circuit resistance (grid-resistor bias).....	0.47	0.47	meg
Bulb temperature at hottest point.....	210	220	°C

AVERAGE CHARACTERISTICS

Class A Amplifier	Instantaneous values	
Plate voltage.....	75	175 volts
Grid 2 (screen) voltage.....	150	175 volts
Grid 1 (control-grid) voltage.....	0	-30 volts
Plate resistance (approx.).....		5000 ohms
Transconductance.....		8800 μmhos
Plate current.....	460	90 ma
Grid 2 current.....	42	6 ma
Grid 1 voltage (approx.) for $I_b = 1.0$ ma.....		-60 volts
Triode amplification factor (g1 + g2 tied together).....		3.8

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.



6CB6


6CB6A



High gain radio-frequency or intermediate-frequency amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 300 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts
 *D-c component must not exceed 100 volts max.



6CB6A

Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

Types 6CB6 and 6CB6A are identical to type 3CB6 except for heater ratings.



6CD6G


6CD6GA



High efficiency horizontal deflection amplifier for television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 2.5 amp
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts
 *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	6CD6G	6CD6GA
Grid to plate: g1 to p.....	0.8	1.1
Input: g1 to k + h + g2 + b.p.....	24	22
Output: p to k + h + g2 + b.p.....	9.5	8.5

MAXIMUM RATINGS (Design center values unless noted)

Horizontal Deflection Amplifier*	6CD6G	6CD6GA
Plate supply voltage, d-c (boost + d-c power supply).....	700	700
Plate voltage, peak pos. (absolute max.)....	6600	7000
Plate voltage, peak negative pulse.....	1500	1500
Grid 2 voltage, d-c.....	175	175
Grid 1 voltage, peak negative.....	200	200
Plate dissipation†.....	15	20
Grid 2 dissipation.....	3.0	3.0
Cathode current, average.....	200	200
Cathode current, peak.....	700	700
Grid 1 circuit resistance.....	0.47	0.47
Bulb temperature at hottest point.....	210	225

CBS ELECTRON TUBES

6CD6G • 6CD6GA (cont.)

AVERAGE CHARACTERISTICS

	Instantaneous values	
Plate voltage.....	60	175 volts
Grid 2 (screen) voltage.....	100	175 volts
Grid 1 (control-grid) voltage.....	0	-30 volts
Plate resistance (approx.).....		7200 ohms
Transconductance.....		7700 μ mhos
Plate current.....	230	75 ma
Grid 2 current.....	21	5.5 ma
Grid 1 voltage (approx.) for $I_b = 1.0$ ma.....		-55 volts
Triode amplification factor (p + g2 tied together).....		3.9

TYPICAL OPERATION

Horizontal Deflection for 90° Picture Tube

Plate supply voltage.....	300 volts
Plate voltage, average (boost + d-c supply).....	620 volts
Plate voltage, peak positive (d-c + pulse).....	5600 volts
Grid 2 (screen) voltage.....	125 volts
Grid 2 current.....	16 ma
Grid 1 (control-grid) input voltage	
Sawtooth component.....	140 volts
Peak to peak.....	180 volts
Plate current, average.....	113 ma
Plate current, peak.....	380 ma
Plate dissipation.....	11 watts
Anode voltage of CRT.....	17.2 kv


NOTES:

*Voltage pulse duration must not exceed 10 μ s in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.




6CE5



Controlled cutoff pentode amplifier for r-f or i-f service

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)	
*D-c component must not exceed 100 volts max.	



Type 6CE5 is identical to type 3CE5 except for different heater characteristics.




6CF6



Controlled-cutoff pentode for radio-frequency or intermediate-frequency amplifier service

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
- Heater negative to cathode..... 90 volts
- Heater positive to cathode..... 90 volts



Type 6CF6 is identical to type 3CF6 except for heater characteristics. Except for its cutoff characteristic, the 6CF6 is similar to the 6CB6.




6CG7



Amplifier or TV sweep oscillator, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
- Heater negative to cathode..... 200 volts
- Heater positive to cathode..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2	
Grid to plate: g1 to p.....	4.0	4.0	$\mu\mu\text{f}$
Input: g1 to k + h + i.s.....	2.3	2.3	$\mu\mu\text{f}$
Output: p to k + h + i.s.....	2.2	2.2	$\mu\mu\text{f}$

6CG7 (cont.)

MAXIMUM RATINGS (Design center values)*	Class A Amplifier	Horizontal Deflection Oscillator†	Vertical Deflection Oscillator‡
Plate voltage.....	300	300	300 volts
Control-grid voltage, positive d-c....	0		volts
Control-grid voltage, peak negative.....		600	400 volts
Plate dissipation			
Each plate.....	3.5	3.5	3.5 watts
Both plates.....	5.0	5.0	5.0 watts
Cathode current			
Average.....	20	20	20 ma
Peak.....		300	70 ma
Control-grid circuit resistance			
Fixed bias.....	1.0	2.2	2.2 meg
Self bias.....		2.2	2.2 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier*

Plate voltage.....	90	250 volts
Control-grid voltage.....	0	-8.0 volts
Plate resistance (approx.).....	6700	7700 ohms
Transconductance.....	3000	2600 μ mhos
Amplification factor.....	20	20
Plate current.....	10	9 ma
Plate current for $E_{c1} = -12.5$ volts.....		1.3 ma
Control-grid voltage (approx.) for $I_b = 10 \mu$ a	-7.0	-18 volts

NOTES:

*Values are for each unit.

†Voltage pulse duration must not exceed 10 μ s in a 525-line, 30-frame system.

‡Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.



6CG8

6CG8A



**Vhf triode oscillator and pentode mixer
for TV or a-m and f-m receivers**

HEATER CHARACTERISTICS


Voltage, a-c or d-c.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts.

6CG8A

Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

Types 6CG8 and 6CG8A are identical to type 5CG8 except for heater characteristics.



CBS ELECTRON TUBES



6CH8




Combined sync separator, clipper or phase splitter and multifunction amplifier, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

	Triode	Pentode
Voltage, a-c or d-c...	6.3	6.3 volts
Current.....	450	450 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode....	200	▲ volts
Heater positive to cathode....	200*	0 volts
Warm-up time.....	11 secs. average (See Series-String Heaters section of APPENDIX in CBS Tube Manual).	

*D-c component must not exceed 100 volts max.

▲Not to exceed operating cathode bias to prevent negative grid 3, tied to heater, from affecting characteristics.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

Grid to plate: g1 to p.....	1.6	μμf
G ₂ to k + h + pentode g3 + i.s.....	1.9	μμf
Output: p to k + h + pentode g3 + i.s.....	1.6	μμf

Pentode Section

Grid to plate: g1 to p, max.....	0.025	μμf
Input: g1 to k + h + g2 + g3 + i.s.....	7.0	μμf
Output: p to k + h + g2 + g3 + i.s.....	2.25	μμf
Coupling: pentode grid 1 to triode plate.....	0.02	μμf
Coupling: pentode plate to triode grid.....	0.005	μμf
Coupling: pentode plate to triode plate.....	0.04	μμf

MAXIMUM RATINGS (Design center values)

Class A Amplifier

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 3 voltage, positive.....	0 volts	
Grid 2 supply voltage.....	300 volts	
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.6	2.0 watts
Grid 2 dissipation		
For E _{c2} up to 150 volts.....	0.5 watts	
For E _{c2} between 150 and 300 volts	See Rating Chart in APPENDIX	
Grid 1 circuit resistance*		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

6CH8 (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode	Pentode
Plate supply voltage.....	200	200 volts
Grid 3 (suppressor) supply voltage.....		0 volts
Grid 2 (screen) supply voltage.....		150 volts
Grid 1 (control-grid) voltage.....	-6.0	volts
Cathode-bias resistor.....		180 ohms
Plate resistance (approx.).....	5.75	300 kilohms
Transconductance.....	3300	6200 μ mhos
Amplification factor.....	19	
Plate current.....	13	9.5 ma
Grid 2 current.....		2.8 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-19	-8 volts


NOTES:

*If either unit is operated at maximum rated conditions, grid 1 circuit resistances for both units should not exceed the stated values.

CBS ELECTRON TUBES




6CL6



**Video output amplifier in television receivers
or audio power amplifier**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	650 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.12	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3 + i.s.....	11.0	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3 + i.s.....	5.5	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 voltage.....	150 volts
Grid 2 supply voltage.....	300 volts
Grid 1 voltage, peak negative.....	50 volts
Grid 1 voltage, peak positive.....	0 volts
Plate dissipation.....	7.5 watts
Grid 2 dissipation.....	1.7 watts
Grid circuit resistance	
Fixed bias.....	0.1 meg
Self bias.....	0.5 meg
Bulb temperature at hottest point.....	200 °C

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	250 volts
Grid 3 (suppressor) voltage.....	connected to cathode at socket
Grid 2 (screen) voltage.....	150 volts
Grid 1 (control-grid) voltage.....	-3.0 volts
Plate resistance (approx.).....	9000 ohms
Transconductance.....	11,000 μmhos
Grid 1 input voltage, peak a-f.....	3.0 volts
Plate current, zero signal.....	30 ma
Plate current, maximum signal.....	31 ma
Grid 2 current, zero signal.....	7.0 ma
Grid 2 current, maximum signal.....	7.2 ma
Grid 1 bias for $I_b = 10 \mu\text{a}$	-14 volts
Load resistance impedance.....	7500 ohms
Total harmonic distortion (approx.).....	8 %
Power output, maximum signal.....	2.8 watts

Video Amplifier with 4.0 Mc bandwidth

Plate supply voltage.....	300 volts
Grid 2 (screen) supply voltage.....	300 volts
Grid 3 (suppressor) voltage.....	connected to cathode at socket
Grid 1 (control-grid) voltage.....	-2.0 volts
Grid 2 resistor.....	24,000 ohms
Grid 1 resistor.....	100,000 ohms
Voltage output, peak-to-peak.....	132 volts
Grid-to-grid input voltage, peak a-f.....	3.0 volts
Plate current, zero signal.....	30 ma
Grid 2 current, zero signal.....	7.0 ma
Load resistance, plate-to-plate.....	3900 ohms




6CL8



**Very-high-frequency oscillator and mixer
used in TV tuners**

HEATER CHARACTERISTICS

- Voltage, a-c or d-c. 6.3 volts
- Current. 450 ma
- Peak heater-cathode voltage, max.
Heater negative to
cathode. 200 volts
- Heater positive to
cathode*. 200 volts
- Warm-up time. 11 secs. average
(See Series-String Heaters section of
APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 100
volts max.



Type 6CL8 is identical to type 5CL8 except for heater characteristics.




6CM6



**Audio power amplifier or vertical deflection
amplifier in TV receivers**

HEATER CHARACTERISTICS

- Voltage, a-c or d-c. 6.3 volts
- Current. 450 ma
- Peak heater-cathode voltage, max.
Heater negative to
cathode. 200 volts
- Heater positive to
cathode*. 200 volts
- *D-c component must not exceed 100
volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

- Grid to plate: g1 to p. 0.7 $\mu\mu\text{f}$
- Input: g1 to k + h + g2 + b.p. 8.0 $\mu\mu\text{f}$
- Output: p to k + h + g2 + b.p. 8.5 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)	Class A Amplifier		Vertical Deflection Amplifier*	
	Pentode		Triode†	
Plate voltage.	315	315	315	volts
Plate voltage peak pos. (absolute max.).	2000	2000	2000	volts
Grid 2 voltage.	285	285		volts
Grid voltage, peak negative.	250	250	250	volts
Plate dissipation†.	12	8	9	watts
Grid 2 dissipation†.	2	1.75		watts
Cathode current, average.	40	40	40	ma
Cathode current, peak.	120	120	120	ma
Grid circuit resistance				
Fixed bias.	0.1			meg
Self bias.	0.5	2.2	2.2	meg

6CM6 (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Single Tube

Two Tubes (Push-Pull)

Plate voltage.....	180	315	250 volts
Grid 2 (screen) voltage.....	180	225	250 volts
Grid 1 (control-grid) voltage.....	-8.5	-13.0	-15.0 volts
Plate resistance (approx.).....	50,000	80,000	ohms
Transconductance.....	3700	3750	μ mhos
Grid 1 input voltage, peak a-f.....	8.5	13.0	30 Δ volts
Plate current, zero signal.....	29	34	70 ma
Plate current, maximum signal.....	30	35	79 ma
Grid 2 current, zero signal.....	3.0	2.2	5 ma
Grid 2 current, maximum signal.....	4.0	6.0	13 ma
Load resistance impedance.....	5500	8500	10,000 \ddagger ohms
Total harmonic distortion (approx.).....	8	12	5 %
Power output, maximum signal.....	2.0	5.5	10 watts

Vertical Deflection Amplifier*

Pentode

Triode \ddagger

Plate voltage.....	250	250 volts
Grid 2 (screen) voltage.....	250	volts
Grid 1 (control-grid) voltage.....	-12.5	-12.5 volts
Plate resistance, per tube.....	50,000	1960 ohms
Transconductance.....	4100	5000 μ mhos
Plate current.....	45	49.5 ma
Grid 2 current.....	4.5	ma
Grid 1 bias for $I_b = 0.5$ ma.....	-37	-37 volts
Amplification.....		9.8

NOTES:

*Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.

\ddagger Tube protection is needed for no-drive conditions if grid-resistor bias is used.

\ddagger Grid 2 connected to plate.

\ddagger Plate to plate.

Δ Grid to grid.



6CM7



Combined vertical deflection oscillator and amplifier with dissimilar sections

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts

Current..... 600 ma

Peak heater-cathode voltage, max.


Heater negative to cathode 200 volts

Heater positive to cathode* 200 volts

Warm-up time..... 11 secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2	
Grid to plate: g1 to p.....	3.8	3.0	μ f
Input: g1 to k + h.....	2.0	3.5	μ f
Output: p to k + h.....	0.5	0.4	μ f

6CM7 (cont.)

MAXIMUM RATINGS

(Design center values unless noted)

Vertical Deflection Service

	Section 1† Oscillator	Section 2† Amplifier
Plate voltage, d-c.....	500	500 volts
Plate voltage, peak pos. (absolute max.).....		2200 volts
Control-grid voltage, peak negative.....	200	200 volts
Plate dissipation.....	1.25	5.5 watts
Cathode current, average.....	15	20 ma
Cathode current, peak.....	70	70 ma
Control-grid circuit resistance		
Fixed bias.....	2.2	1.0 meg
Self bias.....	2.2	2.5 meg

AVERAGE CHARACTERISTICS

Class A Amplifier

	Section 1†	Section 2†
Plate voltage.....	200	250 volts
Control-grid voltage.....	-7.0	-8.0 volts
Plate resistance (approx.).....	10,500	4100 ohms
Transconductance.....	2000	4400 μ mhos
Amplification factor.....	21	18
Plate current.....	5.0	20 ma
Grid 1 voltage (approx.) for $I_b = 10\mu$ a.....	14	volts

NOTES:

*Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.

†Section 1 connects to pins 3, 6, and 7. Section 2 connects to pins 1, 8, and 9.



6CN7



Combined horizontal phase detector and reactance tube in TV, or triode for audio or sync service

HEATER CHARACTERISTICS


Series Parallel †

Voltage, a-c or d-c....	6.3	3.15 volts
Current.....	300	600 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	200 volts
Heater positive to cathode*.....	200	200 volts

*D-c component must not exceed 100 volts max.

Warm-up time..... 11 secs. average†
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

†Warm-up time refers only to parallel connection.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode

Grid to plate: g1 to p.....	1.8	μ f
Input: g1 to k + h.....	1.5	μ f
Output: p to k + h.....	0.5	μ f

Diode

Diode-1 plate to diode cathode and heater.....	3.6	μ f
Diode-2 plate to diode cathode and heater.....	3.6	μ f
Triode grid to each diode plate.....	.006	μ f

CBS ELECTRON TUBES

6CN7 (cont.)

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Control-grid voltage, positive d-c.....	0	volts
Plate dissipation.....	1.0	watt
Diode current for continuous operation, each diode.....	5.0	ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250	volts
Control-grid voltage.....	-1.0	-3.0	volts
Plate resistance (approx.).....	.054	.058	meg
Transconductance.....	1300	1200	μ hos
Amplification factor.....	70	70	
Plate current.....	0.8	1.0	ma
Average diode current, each diode, with 5.0 volts d-c applied.....		20	ma




6CR6



Combined detector and automatic volume controlled audio amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	300	ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	100	volts
Heater positive to cathode.....	100	volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Grid 2 voltage.....	150	volts
Grid voltage, positive d-c.....	0	volts
Plate dissipation.....	2.5	watts
Grid 2 dissipation.....	0.3	watt
Grid 1 circuit resistance.....	1.0	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	250	volts
Grid 2 (screen) voltage.....	100	volts
Grid 1 (control-grid) voltage.....	-2.0	volts
Plate resistance (approx.).....	0.8	meg
Transconductance.....	2200	μ hos
Plate current.....	9.6	ma
Grid 2 current.....	2.6	ma
Grid 1 voltage (approx.) for $g_m = 10 \mu$ hos.....	-32	volts
Average diode current with 10 volts, d-c applied.....	2.0	ma

CBS ELECTRON TUBES




6CS6



Heptode sync separator and clipper in television receivers

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- *D-c component must not exceed 100 volts.



Type 6CS6 is identical to type 3CS6 except for heater characteristics.




6CS7



TV vertical deflection amplifier and/or oscillator, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1†	Section 2	
Grid to plate: g1 to p.....	2.6	2.6	μf
Input: g1 to k + h.....	1.8	3.0	μf
Output: p to k + h.....	0.5	0.5	μf

MAXIMUM RATINGS (Design center values unless noted)

	Section 1 Vertical Deflection Oscillator†	Section 2 Amplifier*	
Plate voltage, d-c.....	500	500	volts
Plate voltage, peak pos. (absolute max.).....		2200	volts
Control-grid voltage, peak negative.....	400	250	volts
Plate dissipation†.....	1.25	6.5	watts
Cathode current, average.....	20	30	ma
Cathode current, peak.....	70	105	ma
Control-grid circuit resistance.....	2.2	2.2	meg

6CS7 (cont.)

AVERAGE CHARACTERISTICS

	Oscillator†	Amplifier
Plate voltage.....	250	250 volts
Control-grid voltage.....	-8.5	-10.5 volts
Plate resistance.....	7700	3450 ohms
Transconductance.....	2200	4500 μ mhos
Amplification factor.....	17	15.5
Plate current.....	10.5	19.0 ma
Plate current for $E_c = -16$ volts.....		3.0 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-24	volts
Grid 1 voltage (approx.) for $I_b = 50 \mu$ a.....	-22	volts

NOTES:

♦Triode section 1 connects to pins 6, 7, and 8; triode section 2 connects to pins 1, 3, and 9.

*Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.



6CU5




Audio output tube for television receivers with low plate supply voltage

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.2 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.7	μ μ f
Input: g1 to k + h + g2 + b.p.....	13.2	μ μ f
Output: p to k + h + g2 + b.p.....	8.6	μ μ f

MAXIMUM RATINGS (Design center values)

Plate voltage.....	135 volts
Grid 2 voltage.....	117 volts
Grid 1 voltage, positive.....	0 volts
Plate dissipation.....	6.0 watts
Grid 2 dissipation.....	1.25 watts
Grid 1 circuit resistance	
Fixed bias.....	0.1 meg
Self bias.....	0.5 meg
Bulb temperature at hottest point.....	220 °C

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	120 volts
Grid 2 (screen) voltage.....	110 volts
Grid 1 (control-grid) voltage.....	-8 volts
Plate resistance (approx.).....	10,000 ohms
Transconductance.....	7500 μ mhos
Grid 1 input voltage, peak a-f.....	8.0 volts
Plate current, zero signal.....	49 ma
Plate current, maximum signal.....	50 ma
Grid 2 current, zero signal.....	4 ma
Grid 2 current, maximum signal.....	8.5 ma
Load resistance impedance.....	2500 ohms
Total harmonic distortion (approx.).....	10 %
Power output, maximum signal.....	2.3 watts

CBS ELECTRON TUBES




6CU6



Horizontal deflection amplifier for TV receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.2 amp
Peak heater-cathode voltage, max. Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.6	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	15.0	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	7.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

Horizontal Deflection Amplifier*

Plate supply voltage, d-c (boost + d-c power supply)...	600 volts
Plate voltage, peak pos. (absolute max.).....	6000 volts
Plate voltage, peak negative pulse.....	1250 volts
Grid 2 voltage, d-c.....	200 volts
Grid 1 voltage, peak negative.....	300 volts
Plate dissipation†.....	11 watts
Grid 2 dissipation.....	2.5 watts
Cathode current, average.....	110 ma
Cathode current, peak.....	400 ma
Grid 1 circuit resistance.....	.47 meg
Bulb temperature at hottest point.....	220 °C

AVERAGE CHARACTERISTICS

Instantaneous values

Plate voltage.....	60	250 volts
Grid 2 (screen) voltage.....	150	150 volts
Grid 1 (control-grid) voltage.....	0	-22.5 volts
Plate resistance (approx.).....		14,500 ohms
Transconductance.....		5900 μmhos
Plate current.....	260	57 ma
Grid 2 current.....	26	2.1 ma
Grid 1 voltage (approx.) for $I_b = 1.0$ ma.....		-43 volts

Triode Connected

Plate and grid 2 voltage (p + g2 tied together).....	150 volts
Grid 1 voltage.....	-22.5 volts
Amplification factor.....	4.3

TYPICAL OPERATION

Horizontal Deflection for 70° Picture Tube*

Plate supply voltage (boost + d-c supply).....	465 volts
Plate voltage, peak positive (d-c + pulse).....	3440 volts
Grid 2 (screen) voltage.....	140 volts
Grid 1 (control-grid) voltage, d-c.....	-28 volts
Grid 1 (control-grid) input voltage Negative peaking component.....	18 volts
Peak to peak.....	74 volts
Plate current.....	83 ma
Grid 2 current.....	12.3 ma
Plate dissipation.....	5.1 watts
Grid 1 resistance.....	0.33 meg
Anode voltage of CRT.....	14 kv

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.



6CX7



Low-noise very high frequency amplifier for cascode operation


HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 400 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode†..... 200 volts
 Heater positive to cathode*..... 200 volts


*D-c component must not exceed 100 volts max.

†Under cutoff conditions when the tube is used as a cascode amplifier, this rating may be as high as 300 volts maximum.

Type 6CX7 is identical to type 4CX7 except for heater characteristics.



6CZ5



Beam power tube for 110° vertical deflection or audio power amplifier service, heater warm-up controlled for series strings


HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts

Warm-up time..... 11 secs. average (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.

Type 6CZ5 is identical to type 5CZ5 except for heater characteristics. See type 5CZ5 for ratings and operating characteristics.



6D5G • 6D6 • 6D7 • 6D8/G

(See chart for seldom-used tubes)



6DA7




Combined vertical amplifier and oscillator for TV receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.0 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2
Grid to plate: g1 to p.....	2.3	6.9 $\mu\mu\text{f}$
Input: g1 to k + h.....	2.0	5.5 $\mu\mu\text{f}$
Output: p to k + h.....	0.415	0.82 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	500 volts
Plate voltage, peak positive pulse†.....		1800 volts
Control-grid voltage, peak negative d-c†.....	-400	-400 volts
Control-grid voltage, negative d-c.....	-50	-50 volts
Plate dissipation.....	2.0	6.0 watts
Cathode current.....	20	40 ma
Control-grid circuit resistance, self bias.....		2.2 meg

CHARACTERISTICS AND TYPICAL OPERATION

	Section 1	Section 2
Plate voltage.....	250	150 volts
Control-grid voltage.....	-8	-17.5 volts
Plate resistance (approx.).....	7700	1100 ohms
Transconductance.....	2600	5700 μmhos
Amplification factor.....	20	6.3
Plate current.....	9.0	40 ma
Zero bias plate current for $E_b = 60$ volts.....		80 ma
Control-grid voltage (approx.) for $I_b = 0.5$ ma.....		-42 volts
Control-grid voltage (approx.) for $g_m = 30 \mu\text{mhos}$ and $I_b = 50 \mu\text{a}$	-16.5	volts

NOTES:

†Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.




6DB5



Vertical deflection amplifier for scanning wide-angle picture tubes or audio power amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.2 amps
Peak heater-cathode voltage, max. Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.5	μμf
Input: g1 to k + h + g2 + b.p.....	15	μμf
Output: p to k + h + g2 + b.p.....	9	μμf

MAXIMUM RATINGS (Design center values unless noted)

Vertical Deflection Amplifier*

Plate voltage.....	300	volts
Plate voltage, peak pos. (absolute max.).....	2000	volts
Grid 2 voltage, d-c.....	150	volts
Grid 1 voltage, peak negative.....	250	volts
Plate dissipation f.....	10	watts
Grid 2 dissipation.....	1.25	watts
Cathode current, average.....	55	ma
Cathode current, peak.....	200	ma
Grid 1 circuit resistance		
Fixed bias.....	0.1	meg
Self bias (Rk = 100 ohms minimum).....	2.2	meg

AVERAGE CHARACTERISTICS

Class A Amplifier

Plate voltage.....	110	200	volts
Grid 2 (screen) voltage.....	110	125	volts
Grid 1 (control-grid) voltage.....	-7.5		volts
Cathode bias resistor.....		180	ohms
Plate resistance (approx.).....	13,000	28,000	ohms
Transconductance.....	8000	8000	μmhos
Grid 1 input voltage, peak a-f.....	7.5	8.5	volts
Plate current, zero signal.....	49	46	ma
Plate current, maximum signal.....	50	47	ma
Grid 2 current, zero signal.....	4.0	2.2	ma
Grid 2 current, maximum signal.....	10	8.5	ma
Load resistance impedance.....	2000	4000	ohms
Total harmonic distortion (approx.).....	10	10	%
Power output, maximum signal.....	2.1	3.8	watts

Triode Connected

Plate and grid 2 voltage (p + g2 tied together).....	225	volts
Grid 1 voltage.....	-30	volts
Plate resistance.....	1500	ohms
Transconductance.....	3800	μmhos

6DB5 (cont.)

Vertical Deflection Amplifier

Plate supply voltage	125 volts
Plate voltage, peak positive (approx.)	720 volts
Grid 2 (screen) supply voltage	125 volts
Cathode bias resistor	100 ohms
Grid 1 (control-grid) input voltage	
Sawtooth component	18 volts
Peak to peak	18 volts
Cathode current, average d-c	40 ma
Cathode current, peak to peak	108 ma
Plate dissipation	5.25 watts
Plate output voltage	
Sawtooth component	190 volts
Peak to peak (approx.)	685 volts

NOTES:

*Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.

6DB6

(See chart for seldom-used tubes)



6DC6




**Gain-controlled i-f or r-f amplifier
for color television receivers**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.....	0.02	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3 + i.s.....	6.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3 + i.s.....	2.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 3 (suppressor) voltage.....	0 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX
Grid 2 supply voltage.....	300 volts
Grid 1 voltage, positive d-c.....	0 volts
Plate dissipation.....	2.0 watts
Grid 2 dissipation.....	0.5 watt
Grid 1 circuit resistance	
Fixed bias.....	0.25 meg
Self bias.....	1.0 meg


CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	200 volts
Grid 3 (suppressor).....	connected to cathode at socket
Grid 2 (screen) voltage.....	150 volts
Plate resistance (approx.).....	0.5 meg
Transconductance.....	5500 μmhos
Plate current.....	9.0 ma
Grid 2 current.....	3.0 ma
Grid 1 voltage (approx.) for $g_m = 50 \mu\text{mhos}$	-12.5 volts

CBS


6DE6



Controlled cutoff intermediate-frequency amplifier

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- *D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield ϕ	
Grid to plate: g1 to p, max.....	0.025	.015	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3 + i.s.....	6.5	6.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3 + i.s.....	2.0	3.0	$\mu\mu\text{f}$

ϕ JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design maximum values)

- Plate voltage..... 330 volts
- Grid 2 voltage..... See Rating Chart in APPENDIX
- Grid 2 supply voltage..... 330 volts
- Grid 1 voltage, positive d-c..... 0 volts
- Plate dissipation..... 2.3 watts
- Grid 2 dissipation..... 0.55 watts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

- Plate voltage..... 125 volts
- Grid 3 (suppressor)..... connected to cathode at socket
- Grid 2 (screen) voltage..... 125 volts
- Cathode bias resistor..... 56 ohms
- Plate resistance (approx.)..... 0.25 meg
- Transconductance..... 8000 μmhos
- Plate current..... 15.5 ma
- Grid 2 current..... 4.2 ma
- Grid 1 voltage (approx.) for $I_b = 20 \mu\text{a}$ -9 volts
- Grid 1 voltage for $g_m = 700 \mu\text{mhos}$, $R_k = 0$ -5.5 volts

CBS


6DG6GT



Audio output amplifier

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 1.2 amps
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 90 volts
 - Heater positive to cathode..... 90 volts



Type 6DG6GT is identical to type 6W6GT except for heater characteristics, maximum $E_b = 200$ volts, and maximum $E_{c2} = 125\text{V}$ and no vertical amplifier ratings.

CBS ELECTRON TUBES




6DN6



Horizontal deflection amplifier for TV receivers having low B supply voltage

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	2.5	amp
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
*D-c component must not exceed 100 volts max.		



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.8	μf
Input: g1 to k + h + g2 + b.p.....	22	μf
Output: p to k + h + g2 + b.p.....	11.5	μf

MAXIMUM RATINGS (Design center values unless noted) Horizontal Deflection Amplifier*

Plate supply voltage, d-c (boost + d-c power supply)...	700	volts
Plate voltage, peak pos. (absolute max.).....	6600	volts
Plate voltage, peak negative pulse.....	1500	volts
Grid 2 voltage, d-c.....	175	volts
Grid 1 voltage, peak negative.....	200	volts
Plate dissipation†.....	15	watts
Grid 2 dissipation.....	3.0	watts
Cathode current, average.....	200	ma
Cathode current, peak.....	700	ma
Grid 1 circuit resistance.....	0.47	meg
Bulb temperature at hottest point.....	225	$^{\circ}\text{C}$

AVERAGE CHARACTERISTICS

Instantaneous values

Plate voltage.....	50	125	volts
Grid 2 (screen) voltage.....	100	125	volts
Grid 1 (control-grid) voltage.....	0	-18	volts
Plate resistance (approx.).....		4000	ohms
Transconductance.....		9000	μmhos
Plate current.....	240	70	ma
Grid 2 current.....	30	6.3	ma
Grid 1 voltage (approx.) for $I_b = 0.5$ ma.....		-36	volts
Triode amplification factor (p + g2 tied together).....		4.35	

NOTES:

- *Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.
- †Tube protection is needed for no-drive conditions if grid-resistor bias is used.



6DQ6

6DQ6A




High efficiency horizontal deflection amplifier for television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.2 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.55	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	15	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	7	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

Horizontal Deflection Amplifier*

	6DQ6	6DQ6A
Plate supply voltage, d-c (boost + d-c power supply).....	550	700 volts
Plate voltage, peak pos. (absolute max.)...	6000	6000 volts
Plate voltage, peak negative pulse.....	1375	1375 volts
Grid 2 voltage, d-c.....	175	200 volts
Grid 1 voltage, d-c.....	—	-50 volts
Grid 1 voltage, peak negative.....	300	300 volts
Plate dissipation†.....	15	15 watts
Grid 2 dissipation.....	2.5	3 watts
Cathode current, average.....	120	140 ma
Cathode current, peak.....	440	440 ma
Grid 1 circuit resistance.....	0.47	1.0 meg
Bulb temperature at hottest point.....	220	220 °C

AVERAGE CHARACTERISTICS

	Instantaneous values	
Plate voltage.....	60	250 volts
Grid 2 (screen) voltage.....	150	150 volts
Grid 1 (control-grid) voltage.....	0	-22.5 volts
Plate resistance (approx.).....		20,000 ohms
Transconductance		
6DQ6A.....		6600 μmhos
6DQ6.....		6000 μmhos
Plate current.....	300	75 ma
Grid 2 current.....	27	2.4 ma
Grid 1 voltage (approx.) for $I_b = 1$ ma		
6DQ6A.....		-46 volts
6DQ6.....		-50 volts

Triode Connected

Plate and grid 2 voltage (p + g2 tied together).....	150	volts
Grid 1 voltage.....	-22.5	volts
Amplification factor.....	4.1	

6DQ6 • 6DQ6A (cont.)

TYPICAL OPERATION

Horizontal Deflection for 70° Picture Tube*

Plate supply voltage (boost + d-c supply).....	465	volts
Plate voltage, peak positive (d-c + pulse).....	3440	volts
Grid 2 (screen) voltage.....	140	volts
Grid 1 (control-grid) voltage, d-c.....	-28	volts
Grid 1 (control-grid) input voltage		
Sawtooth component, peak to peak.....	74	volts
Negative peaking component.....	18	volts
Plate current.....	83	ma
Grid 2 (screen) current.....	12.3	ma
Plate dissipation.....	5.1	watts
Grid 1 resistance.....	0.33	meg
Anode voltage of CRT.....	14	kv

NOTES:

*Voltage pulse duration must not exceed 10 μ s in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.

‡Grid resistor-bias operation.




6DT6



Dual controlled pentode for f-m detector and limiter, mixer, or gain-controlled amplifier use

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	300	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
*D-c component must not exceed 100 volts max.		



Type 6DT6 is identical to type 3DT6 except for heater characteristics.

6E5 • 6E6 • 6E7 • 6F4 • 6F5/G/ GT • 6F6/G/GT • 6F7/S • 6F8G 6G5 • 6G6G • 6H4/GT • 6H5


(See chart for seldom-used tubes)

CBS ELECTRON TUBES



6H6GT


6H6



R-f detector, phase detector, or low power rectifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 0.3 amp
 Peak heater-cathode
 voltage, max..... 330 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES	6H6	6H6GT	
Plate (Sect. 1) to cathode (Sect. 1).....	3.0	3.0	$\mu\mu\text{f}$
Plate (Sect. 2) to cathode (Sect. 2).....	3.4	4.0	$\mu\mu\text{f}$
Plate (Sect. 1) to plate (Sect. 2).....	0.10	0.10	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Rectifier Service

Plate voltage, peak inverse..... 420 volts
 Plate supply voltage, rms (each plate)*..... 150 volts
 Output current, d-c*..... 8 ma
 Plate current, peak steady state (each plate)..... 48 ma
 Plate supply impedance, total effective (each plate)*..... 40 ohms

Voltage Doubler

Half-Wave Full-Wave

Plate voltage, rms..... 117 117 volts
 Plate supply impedance, total effective..... 30 15 ohms
 Output current, d-c..... 8.0 8.0 ma

NOTE:

*Ratings are for half-wave connection.


6J4

(See chart for seldom-used tubes)



6J5


6J5GT



**Audio voltage amplifier, phase inverter,
or general purpose amplifier**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	300	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	6J5	6J5GT	
Grid to plate: g1 to p.....	3.4	3.8	$\mu\mu\text{f}$
Input: g1 to k + h.....	3.4	4.2	$\mu\mu\text{f}$
Output: p to k + h.....	3.6	5.0	$\mu\mu\text{f}$

♦JETEC shield 308 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Control-grid voltage.....	0	volts
Plate dissipation.....	2.5	watts
Cathode current.....	20	ma
Control-grid circuit resistance.....	1.0	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	90	250	volts
Control-grid voltage.....	0	-8	volts
Plate resistance (approx.).....	6700	7700	ohms
Transconductance.....	3000	2600	μmhos
Amplification factor.....	20	20	
Plate current.....	10	9	ma



6J6


6J6A



Very high frequency oscillator, amplifier, or mixer

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	450	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	100	volts
Heater positive to cathode.....	100	volts



6J6A

Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

Types 6J6 and 6J6A are identical to types 5J6 and 19J6 except for heater characteristics. See 5J6 for characteristics and ratings.

CBS ELECTRON TUBES

6J7G/GT • 6J8G • 6K4 • 6K5G/GT

(See chart for seldom-used tubes)




6K6GT



Audio power output amplifier or television vertical deflection amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	400 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.5	μμf
Input: g1 to k + h + g2 + g3.....	5.5	μμf
Output: p to k + h + g2 + g3.....	6.0	μμf

MAXIMUM RATINGS

(Design center values unless noted)

	Class A Amplifier	Vertical Deflection Amplifier*	
Plate voltage.....	315	315	volts
Grid 2 voltage.....	285		volts
Plate voltage, peak positive (absolute max.)†.....		1200	volts
Control grid voltage, peak negative.....		-250	volts
Plate dissipation.....	8.5	7.0	watts
Grid 2 dissipation.....	2.8		watts
Cathode current, average.....		25	ma
Cathode current, peak.....		75	ma
Grid circuit resistance			
Fixed bias.....	0.1		meg
Cathode bias.....	0.5	2.2	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier (Single Tube)

	100	250	315	volts
Plate voltage.....	100	250	315	volts
Grid 2 (screen) voltage.....	100	250	250	volts
Grid 1 (control-grid) voltage.....	-7	-18	-21	volts
Grid 1 input voltage, peak a-f.....	7	18	21	volts
Plate current, zero signal.....	9	32	25.5	ma
Plate current, maximum signal.....	9.5	33	28	ma
Grid 2 current, zero signal.....	1.6	5.5	4.0	ma
Grid 2 current, maximum signal.....	3	10	9	ma
Load resistance impedance.....	12,000	7600	9000	ohms
Total harmonic distortion (approx.).....	11	11	15	%
Power output, maximum signal.....	0.35	3.4	4.5	watts

CBS ELECTRON TUBES

6K6GT (cont.)

Class A Push-Pull Amplifier (Values for two tubes)	Fixed Bias	Cathode Bias
Plate voltage.....	285	285 volts
Grid 2 (screen) voltage.....	285	285 volts
Grid 1 (control-grid) voltage.....	-25.5	volts
Cathode bias resistor.....		400 ohms
Grid-to-grid input voltage, peak a-f.....	51	51 volts
Plate current, zero signal.....	55	55 ma
Plate current, maximum signal.....	72	61 ma
Grid 2 current, zero signal.....	9	9 ma
Grid 2 current, maximum signal.....	17	13 ma
Load resistance, plate-to-plate.....	12,000	12,000 ohms
Total harmonic distortion (approx.).....	6	4 %
Power output, maximum signal.....	10.5	9.8 watts

Triode Connected

Plate and grid 2 voltage (p + g2 tied together).....	250 volts
Grid 1 voltage.....	-18 volts
Plate resistance.....	2500 ohms
Transconductance.....	2700 μ mhos
Plate current, zero signal.....	37.5 ma
Amplification factor.....	6.8
Grid voltage (approx.) for $I_b = 0.5$ ma.....	-48 volts

NOTES:


*Triode connected; grid 2 tied to plate.

†Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.



6K7


6K7G • 6K7GT



Gain controlled i-f or r-f amplifier for radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	6K7 ∇	6K7G Δ	6K7GT Δ	
Grid to plate: g1 to p, max.....	.005	.007	0.005	$\mu\mu$ f
Input: g1 to k + h + g2 + g3.....	7.0	5.0	4.6	$\mu\mu$ f
Output: p to k + h + g2 + g3.....	12	12	12	$\mu\mu$ f

∇ With shell connected to cathode.

Δ With close-fitting shield connected to cathode.

CBS ELECTRON TUBES

6K7 • 6K7G • 6K7GT (cont.)

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Grid 2 voltage.....	125	volts
Grid 2 supply voltage.....	300	volts
Grid voltage.....	0	volts
Plate dissipation.....	2.75	watts
Grid 2 dissipation.....	0.35	watt

CHARACTERISTICS AND TYPICAL OPERATION


Class A Amplifier

Plate voltage.....	100	250	250	volts
Grid 3 (suppressor).....	connected to cathode	connected to cathode	at socket	
Grid 2 (screen) voltage.....	100	100	125	volts
Grid 1 (control-grid) voltage.....	-1.0	-3.0	-3.0	volts
Plate resistance (approx.).....	0.15	0.8	0.6	meg
Transconductance.....	1650	1450	1650	μ mhos
Plate current.....	9.5	7.0	10.5	ma
Grid 2 current.....	2.7	1.7	2.6	ma
Grid 1 voltage (approx.) for $g_m = 2 \mu$ mhos.....	-38.5	-42.5	-52.5	volts



6K8


6K8G • 6K8GT



**Combined triode oscillator and hexode mixer
in radio receivers**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	300	ma



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Hexode plate voltage.....	300	volts
Hexode grid 2 and 4 voltage.....	150	volts
Hexode grid 2 and 4 supply voltage.....	300	volts
Hexode grid 3 voltage, negative d-c.....	0	volts
Triode plate voltage.....	125	volts
Hexode grid 2 and 4 dissipation.....	0.7	watt
Hexode plate dissipation.....	0.75	watt
Triode plate dissipation.....	0.75	watt
Cathode current, total.....	16	ma

CBS ELECTRON TUBES

6K8 • 6K8G • 6K8GT (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Converter Service (Separate excitation)

Hexode plate voltage.....	100	250 volts
Hexode screen (grids 2 & 4) voltage.....	100	100 volts
Hexode control-grid (grid 3) voltage.....	-3	-3 volts
Hexode plate resistance (approx.).....	0.4	0.6 meg
Hexode plate current.....	2.3	2.5 ma
Hexode screen current.....	6.2	6.0 ma
Triode plate voltage.....	100	100 volts
Triode grid resistor.....	50,000	50,000 ohms
Triode plate current.....	3.8	3.8 ma
Triode grid and hexode grid 1 current.....	0.15	0.15 ma
Conversion transconductance.....	325	350 μ mhos
Conversion transconductance with hexode grid 3 bias = -30 volts (approx.).....	2	2 μ mhos
Cathode current, total.....	12.5	12.5 ma

Oscillator Characteristics, Not Oscillating

Plate voltage.....	100 volts
--------------------	-----------

6L5G

(See chart for seldom-used tubes)



6L6


6L6G • 6L6GA
6L6GB



Audio output tube with high power, high
sensitivity, and high efficiency

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	900 ma
Peak heater-cathode voltage, max.....	180 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.4	$\mu\mu$ f
Input: g1 to k + h + g2 + b.p.....	10	$\mu\mu$ f
Output: p to k + h + g2 + b.p.....	12	$\mu\mu$ f

CBS ELECTRON TUBES

6L6 • 6L6G • 6L6GA • 6L6GB (cont.)

MAXIMUM RATINGS (Design center values)

	Triode connected*	Pentode
Plate voltage.....	275	360 volts
Grid 2 voltage.....	275	270 volts
Plate dissipation.....	19	19 watts
Grid 2 dissipation.....		2.5 watts
Grid circuit resistance		
Fixed bias.....	0.1	0.1 meg
Self bias.....	0.5	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode*	Pentode		
Plate voltage.....	250	250	300	350 volts
Grid 2 voltage.....	Plate	250	200	250 volts
Grid 1 voltage.....	-20	-14	-12.5	-18 volts
Plate resistance.....	1700	22,500	35,000	33,000 ohms
Transconductance.....	4700	6000	5300	5200 μ mhos
Grid 1 input voltage, peak a-f	20	14	12.5	18 volts
Plate current, zero signal.....	40	72	48	54 ma
Plate current, max. signal.....	44	79	55	66 ma
Grid 2 current, zero signal.....	—	5	2.5	2.5 ma
Grid 2 current, max. signal.....	—	7.3	4.7	7.0 ma
Load resistance impedance	5000	2500	4500	4200 ohms
Total harmonic distortion.....	5	10	11	15 %
Power output, max. signal.....	1.4	6.5	6.5	10.8 watts

Push-Pull Amplifier (Values for two tubes)


	Class A1		Class AB1		Class AB2	
Plate voltage.	250	270	360	360	360	360 volts
Grid 2 voltage	250	270	270	270	225	270 volts
Grid 1 voltage.....	-16	-17.5	-22.5	-22.5	-18.0	-22.5 volts
Plate re- sistance, per tube	24,500	23,500				ohms
Transcon- ductance, per tube..	5500	5700				μ mhos
Grid-to-grid input voltage, peak a-f.....	32	35	45	45	52	72 volts
Plate current, zero signal.	120	134	88	88	78	88 ma
Plate current, max. signal	140	155	132	140	142	205 ma
Grid 2 current, zero signal..	10	11	5	5	3.5	5 ma
Grid 2 current, max. signal..	16	17	15	11	11	16 ma
Load re- sistance, plate-to- plate.....	5000	5000	6600	3800	6000	3800 ohms
Total harmonic distortion.....	2	2	2	2	2	2 %
Power output....	14.5	17.5	26.5	18	31	47 watts

*Grid 2 tied to plate



6L7


6L7G



Dual control heptode for r-f mixer or automatic volume expander circuits

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
Current..... 300 ma



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

	Class A ₁ Amplifier	Mixer
Plate voltage.....	300	300 volts
Grid 2 and 4 voltage.....	100	150 volts
Screen dissipation.....	1.0	1.5 watts
Plate dissipation.....	1.5	1.0 watts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	250	volts
Grid 2 and 4 (screen grid) voltage.....	100	volts
Grid 1 and 3 (control-grid) voltage.....	-3.0	volts
Plate resistance.....	0.6	meg
Transconductance (grid 1 to plate).....	1100	μmhos
Transconductance with g1 and g3 = -15 volts.....	5.0	μmhos
Plate current.....	5.3	ma
Screen current.....	6.5	ma

Mixer

Plate voltage.....	250	250* volts
Grid 2 and 4 (screen grid) voltage.....	100	150* volts
Grid 1 (signal-grid) voltage.....	-3.0	-6.0* volts
Grid 3 (oscillator-grid) voltage†.....	-10.0	-15.0 volts
Grid 3 voltage, peak.....	12	18 volts
Plate resistance.....	>1	>1 meg
Conversion transconductance.....	375	350 μmhos
Conversion transconductance.....	5.0▲	5.0Δ μmhos
Plate current.....	2.4	3.3 ma
Screen current.....	7.1	9.2 ma

NOTES:

*These values are recommended for multi-range receiver applications.

†D-c resistance in grid 3 circuit should not exceed 50,000 ohms.

▲Grid 1 bias = -30 volts.

Δ Grid 1 bias = -45 volts.

6N4 • 6N6G


(See chart for seldom-used tubes)

CBS ELECTRON TUBES



6N7


6N7GT



Push-pull class B triode power amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 800 ma



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

	Class A Amplifier (Driver)*	Class B Power Amplifier
Plate voltage, d-c.....	300	300 volts
Plate dissipation (each plate).....	1.0	5.5 watts
Plate current, peak (each plate).....		125 ma

CHARACTERISTICS AND TYPICAL OPERATION Class B Power Amplifier

Plate voltage.....	300	300 volts
Control-grid voltage.....	0	0 volts
Grid-to-grid voltage, peak a-f.....	58	82 volts
D-c plate current, zero signal.....	35	35 ma
D-c plate current, maximum signal.....	70	70 ma
Grid current, peak (each unit).....	20	22 ma
Plate supply impedance.....	0	1000 ohms
Grid circuit impedance, effective (each unit).....	0	516† ohms
Load resistance, effective (plate-to-plate).....	8000	8000 ohms
Total harmonic distortion.....	4	8 %
Third harmonic distortion.....	3.5	7.5 %
Fifth harmonic distortion.....	1.5	2.5 %
Power output, maximum signal.....	10	10 watts

Class A Amplifier (Driver)*

Plate voltage.....	250	294 volts
Control-grid voltage.....	-5.0	-6.0 volts
Plate resistance.....	11,300	11,000 ohms
Transconductance.....	3100	3200 μmhos
Plate current.....	6.0	7.0 ma
Plate load resistance.....	between 20,000 and 40,000	ohms
Amplification factor.....	35	35
Power output (approx.).....	400	400 mw

NOTES:

*Both grids and plates connected together at socket.

†Consists of 500 ohms effective resistance and 50 mh leakage reactance.

6P5GT • 6P7G • 6Q4 6Q6/G/6T7G


(See chart for seldom-used tubes)

CBS ELECTRON TUBES



6Q7


6Q7G • 6Q7GT



**Combined detector, avc, and audio amplifier
for a-m radio receivers**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.....	90 volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Diode current (min.) with 10 volts applied to each plate..	0.8 ma
Diode current (max.), each plate, continuous operation..	1.0 ma

CHARACTERISTICS AND TYPICAL OPERATION*

Class A Amplifier (Triode Unit)

Plate voltage.....	100	250 volts
Control-grid voltage.....	-1.0	-3.0 volts
Plate resistance (approx.).....	.058	.058 meg
Transconductance.....	1200	1200 μ mhos
Amplification factor.....	70	70
Plate current.....	0.8	1.0 ma

NOTES:

*The two diode plates are placed around the cathode and are independent of the triode unit except for the common cathode.

6R6G • 6R7/G/GT • 6R8


(See chart for seldom-used tubes)

CBS ELECTRON TUBES



6S4

6S4A



Vertical deflection output amplifier for television receivers


HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	600 ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time†.....	11 secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component 100 volts max.

†Applies only to 6S4A



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	2.6	μμf
Input: g1 to k + h.....	4.2	μμf
Output: p to k + h.....	0.9	μμf

MAXIMUM RATINGS (Design center values unless noted)*

Plate voltage, d-c.....	500 volts
Plate voltage, peak pos. (absolute max.).....	2200 volts
Control-grid voltage, peak negative pulse.....	250 volts
Plate dissipation.....	7.5 watts
Cathode current, average.....	30 ma
Cathode current, peak.....	105 ma
Control-grid circuit resistance, cathode bias.....	2.2 meg

AVERAGE CHARACTERISTICS

Class A Amplifier

Plate voltage.....	250 volts
Control-grid voltage.....	-8.0 volts
Plate resistance (approx.).....	3600 ohms
Transconductance.....	4500 μmhos
Amplification factor.....	16
Plate current.....	26 ma
Grid 1 voltage (approx.) for I _b = 50 μa.....	-23 volts
Plate current (approx.) for E _{c1} = -15 volts.....	4.5 ma

NOTES:

*Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.


6S7/G

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




6S8GT



Combined a-m, f-m detector and audio amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Plate dissipation.....	0.5 watt
Plate current (each diode).....	1.0 ma

CHARACTERISTICS AND TYPICAL OPERATION


Class A Amplifier

Plate voltage.....	50	100	250	volts
Control-grid voltage.....	0	-1	-2	volts
Control-grid resistor.....	10	—	—	meg
Plate resistance (approx.).....	.285	.11	.091	meg
Transconductance.....	300	900	1100	μ mhos
Amplification factor.....	85	100	100	
Plate current.....	.07	0.4	0.9	ma



6SA7

6SA7G • 6SA7GT




Pentagrid converter for radio receivers


HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma

6SA7



6SA7G • 6SA7GT



CBS ELECTRON TUBES

6SA7 • 6SA7G • 6SA7GT (cont.)

ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Grid 2 and 4 voltage.....	100	volts
Grid 2 and 4 supply voltage.....	300	volts
Grid 3 voltage, negative d-c.....	50	volts
Grid 3 voltage, positive d-c.....	0	volts
Grid 2 dissipation.....	1.0	watt
Plate dissipation.....	1.0	watt
Cathode current, total.....	14	ma

CHARACTERISTICS AND TYPICAL OPERATION

Converter Service (Separate excitation)	Self Excitation*		Separate Excitation	
Plate voltage.....	100	250	100	250 volts
Grid 3 (signal grid) voltage.....	0	0	-2	-2 volts
Grid 2 and 4 (oscillator anode) voltage.....	100	100	100	100 volts
Grid 1 (oscillator grid) resistor.....	20,000	20,000	20,000	20,000 ohms
Plate resistance (approx.)...	0.5	1.0	0.5	1.0 meg
Conversion transconductance.....	425	450	425	450 μ hos
Cathode current, total.....	12.3	12.5	12.3	12.5 ma
Plate current.....	3.3	3.5	3.3	3.5 ma
Grid 2 and 4 (oscillator anode) current.....	8.5	8.5	8.5	8.5 ma
Grid 1 (oscillator grid) current.....	0.5	0.5	0.5	0.5 ma
Conversion transcon- ductance with $E_{c3} = -35V$...	2	2	2	2 μ hos

NOTES:


*Values are approximate and are for a Hartley circuit having a feedback of about 2 volts peak in the cathode circuit.

6SB7Y

(See chart for seldom-used tubes)




6SC7



Audio voltage amplifier or phase inverter

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	300	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



CBS ELECTRON TUBES

6SC7 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES†

	Section 1	Section 2	
Grid to plate: g1 to p.....	2.0	2.0	$\mu\mu\text{f}$
Input: g1 to k + h + shell.....	2.0	2.0	$\mu\mu\text{f}$
Output: p to k + h + shell.....	3.0	3.0	$\mu\mu\text{f}$

†With pin 1 connected to pin 6.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	250 volts
--------------------	-----------

CHARACTERISTICS AND TYPICAL OPERATION

Class Amplifier (Each section)

Plate voltage.....	250 volts
Control-grid voltage.....	-2.0 volts
Plate resistance (approx.).....	.053 meg
Transconductance.....	1325 μmhos
Amplification factor.....	70
Plate current.....	2.0 ma

6SD7GT • 6SE7GT • 6SF5/GT 6SF7

(See chart for seldom-used tubes)



6SG7


6SG7GT



**Radio frequency or intermediate frequency amplifier
capable of high frequency operation**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES†

Grid to plate: g1 to p, max.....	0.003	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	8.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	7.0	$\mu\mu\text{f}$

†Shell connected to cathode.

CBS ELECTRON TUBES

6SG7 • 6SG7GT (cont.)

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Grid 2 voltage.....	200	volts
Grid 2 supply voltage.....	300	volts
Grid 1 voltage.....	0	volts
Plate dissipation.....	3.0	watts
Grid 2 dissipation.....	0.6	watt


CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250	250	volts
Grid 3 (suppressor).....	connected to cathode at socket			
Grid 2 (screen) voltage.....	100	125	150	volts
Grid 1 (control-grid) voltage.....	-1.0	-1.0	-2.5	volts
Plate resistance (approx.).....	0.25	0.9	>1.0	meg
Transconductance.....	4100	4700	4000	μ mhos
Plate current.....	8.2	11.8	9.2	ma
Grid 2 current.....	3.2	4.4	3.4	ma
Grid 1 voltage (approx.) for $g_m = 40 \mu$ mhos.....	-11.5	-14	-17.5	volts




6SH7



R-f or i-f amplifier and f-m limiter capable of high frequency operation

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	300	ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES†

Grid to plate: g1 to p, max.....	0.003	$\mu\mu$ f
Input: g1 to k + h + g2 + g3.....	8.5	$\mu\mu$ f
Output: p to k + h + g2 + g3.....	7.0	$\mu\mu$ f

†With shell connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Grid 2 voltage.....	150	volts
Grid 2 supply voltage.....	300	volts
Grid 1 voltage.....	0	volts
Plate dissipation.....	3.0	watts
Grid 2 dissipation.....	0.7	watt

CBS ELECTRON TUBES

6SH7 (cont.)

CHARACTERISTICS AND TYPICAL OPERATION


Class A Amplifier

Plate voltage.....	100	250 volts
Grid 2 (screen) voltage.....	100	150 volts
Grid 1 (control-grid) voltage.....	-1	-1 volts
Plate resistance (approx.).....	0.35	0.9 meg
Transconductance.....	4000	4900 μ mhos
Plate current.....	5.3	10.8 ma
Grid 2 current.....	2.1	4.1 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-4.0	-5.5 volts



6SJ7


6SJ7GT



R-f amplifier, biased detector, or audio amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	6SJ7†	6SJ7GT‡	
Grid to plate: g1 to p, max.....	0.005	0.005	μ f
Input: g1 to k + h + g2 + g3.....	6.0	7.0	μ f
Output: p to k + h + g2 + g3.....	7.0	7.0	μ f

†Shell connected to cathode.

‡JETEC shield 308 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 voltage.....	125 volts
Grid 2 supply voltage.....	300 volts
Grid 1 voltage, positive d-c.....	0 volts
Plate dissipation.....	2.5 watts
Grid 2 dissipation.....	0.7 watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier


Plate voltage.....	100	250 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....	100	100 volts
Grid 1 (control-grid) voltage.....	-3	-3 volts
Plate resistance (approx.).....	0.7	1.0 meg
Transconductance.....	1575	1650 μ mhos
Plate current.....	2.9	3.0 ma
Grid 2 current.....	0.9	0.8 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-8	-8 volts

CBS ELECTRON TUBES



6SK7


6SK7GT



Gain-controlled r-f or i-f amplifier in radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	6SK7†	6SK7GT‡	
Grid to plate: g1 to p, max.....	0.003	0.005	μμf
Input: g1 to k + h + g2 + g3.....	6.0	6.5	μμf
Output: p to k + h + g2 + g3.....	7.0	7.5	μμf

†Shell connected to cathode.

‡JETEC shield 308 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Grid 2 voltage.....	125 volts
Grid 2 supply voltage.....	300 volts
Grid 1 voltage.....	0 volts
Plate dissipation.....	4.0 watts
Grid 2 dissipation.....	0.4 watt


CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....	100	100 volts
Grid 1 (control-grid) voltage.....	-1.0	-3.0 volts
Plate resistance (approx.).....	0.12	0.8 meg
Transconductance.....	2350	2000 μmhos
Plate current.....	13	9.2 ma
Grid 2 current.....	4.0	2.6 ma
Grid 1 voltage (approx.) for $g_m = 10 \mu\text{mhos}$	-35	-35 volts




6SL7GT



Phase inverter or resistance-coupled amplifier in audio service

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



CBS ELECTRON TUBES

6SL7GT (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES — Shield†

	Section 1	Section 2	
Grid to plate: g1 to p.....	2.8	2.8	μμf
Input: g1 to k + h.....	3.0	3.4	μμf
Output: p to k + h.....	3.8	3.2	μμf

†JETEC shield 308 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Control-grid voltage, positive d-c.....	0 volts
Plate dissipation.....	1.0 watt

CHARACTERISTICS AND TYPICAL OPERATION


Class A Amplifier

Plate voltage.....	250 volts
Control-grid voltage.....	-2.0 volts
Plate resistance (approx.).....	44,000 ohms
Transconductance.....	1600 μmhos
Amplification factor.....	70
Plate current.....	2.3 ma



6SN7GT

6SN7GTA • 6SN7GTB




TV sweep oscillator and vertical amplifier;
phase inverter and R-C amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time, 6SN7GTB only, 11 secs. average (See Series-String Heaters section of APPENDIX in CBS Tube Manual).	

*D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	6SN7GT		6SN7GTA & 6SN7GTB		
	Section 1	Section 2	Section 1	Section 2	
Grid to plate: g1 to p... 3.8	4.0	4.0	3.8	μμf	
Input: g1 to k + h..... 2.8	3.0	2.2	2.6	μμf	
Output: p to k + h..... 0.8	1.2	0.7	0.7	μμf	

CBS ELECTRON TUBES

6SN7GT • 6SN7GTA • 6SN7GTB (cont.)

MAXIMUM RATINGS (Design center values unless noted)	6SN7GTA and 6SN7GTB	
	Class A Amplifier	Vertical Deflection Amplifier*
Plate voltage, d-c.....	450	450 volts
Plate voltage, peak pos. (absolute max.).....		1500 volts
Control-grid voltage, peak negative.....		250 volts
Plate dissipation (each plate).....	5.0	5.0 watts
Plate dissipation (total for both plates).....	7.5	7.5 watts
Cathode current, avg.....	20	20 ma
Cathode current, peak.....		70 ma
Control-grid circuit resistance		
Fixed bias.....	1.0	meg
Self bias.....		2.2 meg

MAXIMUM RATINGS	6SN7GTA	
	Class A Amplifier	Vertical Deflection Amplifier*
Plate voltage, d-c.....	300	300 volts
Plate voltage, peak positive (absolute max.).....		1200 volts
Plate dissipation (each plate).....	3.5	3.5 watts
Plate dissipation (total for both plates).....	5.0	5.0 watts

CHARACTERISTICS AND TYPICAL OPERATION

Plate voltage.....	90	250 volts
Control-grid voltage.....	0	-8.0 volts
Plate resistance (approx.).....	6700	7700 ohms
Transconductance.....	3000	2600 μ mhos
Amplification factor.....	20	20
Plate current.....	10	9 ma
Plate current for $E_{c1} = 12.5$ volts.....		1.3 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....	-7	-18 volts

NOTES:


*Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.

▲With the exception of the values listed, type 6SN7GT has the same maximum ratings as types 6SN7GTA and 6SN7GTB.



6SQ7


6SQ7G • 6SQ7GT



Combined detector, avc, and audio amplifier
in radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode	6SQ7†	6SQ7G/GT
Grid to plate: g1 to p.....	1.6	1.8 μ f
Input: g1 to k + h.....	3.2	4.2 μ f
Output: p to k + h.....	3.0	3.4 μ f

†With shell connected to cathode.

CBS ELECTRON TUBES

6SQ7 • 6SQ7G • 6SQ7GT (cont.)

MAXIMUM RATINGS (Design center values)

Plate voltage..... 300 volts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250	volts
Control-grid voltage.....	-1.0	-2.0	volts
Plate resistance (approx.).....	0.11	.085	meg
Transconductance.....	925	1175	μ mhos
Amplification factor.....	100	100	
Plate current.....	0.5	1.1	ma

6SR7GT • 6SS7 • 6ST7 6SU7GT • 6SV7 • 6SZ7

(See chart for seldom-used tubes)



6T4




Local oscillator in ultra-high-frequency tuners

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 225 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 50 volts
 Heater positive to cathode*..... 50 volts

*D-c component must not exceed 25 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Grid to plate: g1 to p.....	1.7	1.7	μ mf
Input: g1 to k + h.....	3.3	2.9	μ mf
Output: p to k + h.....	1.8	0.25	μ mf
Heater to cathode: h to k*.....	2.9	3.0	μ mf
Grid to cathode: g1 to k*.....	2.6	2.6	μ mf
Plate to cathode: p to k*.....	0.18	0.20	μ mf

Grounded grid operation

Input.....	5.7	5.5	μ mf
Output.....	3.4	1.8	μ mf

†JETEC shield 316 connected to cathode.

*Measured between specified elements only. When external shield is used, it should be grounded.

MAXIMUM RATINGS (Design center values)

Plate voltage..... 200 volts
 Plate dissipation..... 3.5 watts
 Cathode current..... 30 ma

CBS ELECTRON TUBES

6T4 (cont.)

CHARACTERISTICS

Plate voltage.....	80 volts
Cathode-bias resistor.....	150 ohms
Plate resistance (approx.).....	1860 ohms
Transconductance.....	7000 μ mhos
Amplification factor.....	13
Plate current.....	18 ma
Control-grid voltage (approx.) for $I_b = 50 \mu$ a.....	-15 volts

TYPICAL OPERATION

Oscillator at 950 Mc

Plate voltage.....	80 volts
Control-grid voltage (self-bias).....	-4.0 volts
Control-grid resistance.....	10,000 ohms
Plate current.....	18 ma
Control-grid current.....	400 μ a

6T5 • 6T6 • 6T7G/6Q6G

(See chart for seldom-used tubes)



6T8

6T8A



Combined a-m, f-m detector and audio voltage amplifier


HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative 6T8A 6T8	
to cathode....	100 200 volts
Heater positive	
to cathode....	100 200* volts

6T8A

Warm-up time..... 11 secs. average
(See Series-String Heaters section of
APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100
volts max.



Types 6T8 and 6T8A are identical to types 5T8 and 19T8 except for
heater characteristics. See 5T8 for additional data.

6U4GT • 6U5 • 6U6GT • 6U7G


(See chart for seldom-used tubes)

CBS ELECTRON TUBES



6U8


6U8A



Vhf triode oscillator and pentode mixer for TV tuners

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 450 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- *D-c component must not exceed 100 volts max.



6U8A

Warm-up time .. 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

Types 6U8 and 6U8A are identical to type 5U8 except for heater characteristics.




6V3A



Damping diode in television horizontal sweep circuits§

HEATER CHARACTERISTICS

- Voltage..... 6.3 volts
- Current..... 1.75 amps
- Peak heater-cathode voltage, max.*
 - Heater negative to cathode†..... 6750 volts
 - Heater positive to cathode*..... 300 volts
- †D-c component must not exceed 750 volts absolute max.
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Heater to cathode: h to k, max.....	1.5	μμf
Cathode to plate-and-heater: k to p + h.....	9.0	μμf
Plate to cathode-and-heater: p to k + h.....	8.0	μμf

MAXIMUM RATINGS (Design center values unless noted)

TV Dampner Service*▲

Plate voltage, peak inverset.....	6000	volts
Plate current, d-c.....	135	ma
Plate current, peak.....	800	ma
Plate dissipation.....	2.7	watts

AVERAGE CHARACTERISTICS

Tube voltage drop at 250 ma..... 19 volts

NOTES:

- §Type 6V3A is a replacement for type 6V3 which is identical except for bulb length.
- *Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.
- ▲Operation as a power rectifier of 6V3A is not recommended.
- †Absolute maximum value.

CBS ELECTRON TUBES

6V5G

(See chart for seldom-used tubes)



6V6GT

6V6 • 6V6GTA




Audio power amplifier with high output and high sensitivity

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
Current..... 450 ma

6V6GTA

Warm-up time 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).



Types 6V6GT and 6V6GTA are identical to type 5V6GT except for heater characteristics. Type 6V6 is identical to the 6V6GT except that it has a metal envelope, JETEC outline 8-6.

6V7G • 6V8

(See chart for seldom-used tubes)



6W4GT



Damper diode in horizontal sweep circuits of television receivers

HEATER CHARACTERISTICS

Voltage..... 6.3 volts
Current..... 1.2 amps


Peak heater-cathode voltage, max.*

Heater negative to cathode†..... 2300 volts

Heater positive to cathode*..... 300 volts

†D-c component must not exceed 500 volts absolute max.

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Heater to cathode: h to k, max.....	7.0	μμf
Cathode to plate-and-heater: k to p + h.....	13	μμf
Plate to cathode-and-heater: p to k + h.....	6.0	μμf

CBS ELECTRON TUBES

6W4GT (cont.)

MAXIMUM RATINGS (Design center values unless noted) TV Dampener Service*

Plate voltage, peak inverse†	3850	volts
Plate current, d-c	125	ma
Plate current, peak	75C	ma
Plate dissipation	3.5	watts

AVERAGE CHARACTERISTICS

Tube voltage drop at 250 ma	21	volts
-----------------------------	----	-------

NOTES:

*Voltage pulse duration must not exceed 10 μ s in a 525-line, 30-frame system.


†Absolute maximum value.

6W5G

(See chart for seldom-used tubes)



6W6GT




Audio output amplifier or television
vertical deflection amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3	volts
Current	1.2	amp
Peak heater-cathode voltage, max.		
Heater negative to cathode	200	volts
Heater positive to cathode*	200	volts

*D-c component must not exceed 100 volt max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p	0.8	μ f
Input: g1 to k + h + g2 + b.p.	15.0	μ f
Output: p to k + h + g2 + b.p.	9.0	μ f

MAXIMUM RATINGS (Design center values unless noted)

Class A Vert. Deflection Amp.*

	Amplifier	Pentode	Triode†
Plate voltage	300	300	300
Plate voltage, peak pos (absolute max.)	1500		1200
Grid 2 voltage	150	150	
Grid 1 voltage, peak negative		250	250
Plate dissipation	10	7.0	7.5†
Grid 2 dissipation	1.25	1.0	
Cathode current, average	60		60
Cathode current, peak	180		180
Grid 1 circuit resistance			
Fixed bias	0.1		
Cathode bias	0.5	2.2	2.2

CBS ELECTRON TUBES

6W6GT (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier (Single tube)

Plate voltage.....	110	200	volts
Grid 2 (screen) voltage.....	110	125	volts
Grid 1 (control-grid) voltage.....	-7.5		volts
Cathode bias resistor.....		180	ohms
Plate resistance (approx.).....	13,000	28,000	ohms
Transconductance.....	8000	8000	μ hos
Grid 1 input voltage, peak a-f.....	7.5	8.5	volts
Plate current, zero signal.....	49	46	ma
Plate current, maximum signal.....	50	47	ma
Grid 2 current, zero signal.....	4.0	2.2	ma
Grid 2 current, maximum signal.....	10	8.5	ma
Load resistance impedance.....	2000	4000	ohms
Total harmonic distortion (approx.).....	10	10	%
Power output, maximum signal.....	2.1	3.8	watts

Triode Connected Characteristics†

Plate voltage.....		225	volts
Grid 1 (control-grid) voltage.....		-30	volts
Plate resistance (approx.).....		1600	ohms
Transconductance.....		3800	μ hos
Amplification factor.....		6.2	
Grid 1 voltage for $I_b = 0.5$ ma.....		-42	volts
Plate current.....		22	ma

NOTES:

*Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions, if grid-resistor bias is used.


‡Triode connected with screen tied to plate.

6W7G

(See chart for seldom-used tubes)




6X4



Full-wave power rectifier for automobile and a-c operated radios

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	0.6	amp
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	450	volts
Heater positive to cathode.....	100	volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Rectifier Service

Plate voltage, peak inverse.....		1250	volts
Plate supply voltage, rms (each plate).....			
Output current, d-c.....	RATING CHART I*		
Plate current, peak steady state (each plate).....	RATING CHART II*	210	ma
Plate current, peak transient (each plate).....	RATING CHART III*	1.0	amp

CBS ELECTRON TUBES

6X4 (cont.)

CHARACTERISTICS

Tube Voltage Drop

Conducting 70 ma (each plate)..... 22 volts

TYPICAL OPERATION

Full-Wave Rectifier (Capacitor Input Filter)

Plate supply voltage, rms (each plate)..... 325 volts
 Plate supply impedance (each plate)..... 525 ohms
 Filter input capacitor..... 10 μ f
 Output current, d-c..... 70 ma
 Output voltage at filter input, d-c
 At half-load current..... 365 volts
 At full-load current..... 310 volts
 Percentage regulation..... 15 %

Full-Wave Rectifier (Choke Input Filter)

Plate supply voltage, rms (each plate)..... 450 volts
 Filter input choke..... 10 henrys
 Output current, d-c..... 70 ma
 Output voltage at filter input, d-c
 At half-load current..... 395 volts
 At full-load current..... 385 volts
 Percentage regulation..... 2.5 %

NOTES:

*Rating Charts given in APPENDIX.

6X5GT

(See chart for seldom-used tubes)



6X8

6X8A



Combined vhf oscillator and mixer used in TV tuners

HEATER CHARACTERISTICS


Voltage, a-c or d-c..... 6.3 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater negative to
 cathode..... 100 volts
 Heater positive to
 cathode*..... 100 volts

*D-c component must not exceed 100 volts max.

6X8A

Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

Types 6X8 and 6X8A are identical to type 5X8 except for heater characteristics. Similar but not identical types are the 5AT8, 6AT8, 5CG8 and 6CG8.



6Y3G • 6Y5/V

(See chart for seldom-used tubes)

CBS ELECTRON TUBES



6Y6GA


6Y6G



Audio output amplifier in equipment with low B + voltage

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	1.25 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	180 volts
Heater positive to cathode.....	180 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.66	μf
Input: g1 to k + h + g2 + b.p.....	12	μf
Output: p to k + h + g2 + b.p.....	7.5	μf

MAXIMUM RATINGS (Design center values)

Plate voltage.....	200 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX
Grid 2 supply voltage.....	200 volts
Plate dissipation.....	12.5 watts
Grid 2 dissipation.....	1.75 watts
Grid 1 circuit resistance	
Fixed bias.....	0.1 meg
Self bias.....	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	135	200 volts
Grid 2 (screen) voltage.....	135	135 volts
Grid 1 (control-grid) voltage.....	-13.5	-14 volts
Plate resistance (approx.).....	9300	18,300 ohms
Transconductance.....	7000	7100 μmhos
Grid 1 input voltage, peak a-f.....	13.5	14 volts
Plate current, zero signal.....	58	61 ma
Plate current, maximum signal.....	60	66 ma
Grid 2 current, zero signal.....	3.5	2.2 ma
Grid 2 current, maximum signal.....	11.5	9 ma
Load resistance impedance.....	2000	2600 ohms
Total harmonic distortion (approx.).....	3.6	6 %
Power output, maximum signal.....	10	10 watts

**6Y7G • 6Z3 • 6Z4 • 6Z4/84 • 6Z5
6Z5/12Z5 • 6Z7G • 6ZY5G • 7A4
7A5 • 7A6 • 7A7 • 7A8 • 7AB7
7AD7 • 7AF7 • 7AG7 • 7AH7 • 7AJ7**

(See chart for seldom-used tubes)

CBS ELECTRON TUBES



7AU7




**TV sweep oscillator and vertical amplifier
or phase inverter, heater warm-up time
controlled for series strings**

HEATER CHARACTERISTICS

	Series	Parallel†
Voltage, a-c or d-c	7.0	3.5 volts
Current	300	600 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode		200 volts
Heater positive to cathode*		200 volts
†Warm-up time		11 secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield‡	
Grid to plate: g1 to p	1.5	1.5	μμf
Input: g1 to k + h	1.6	1.8	μμf
Output: p to k + h			
Section 1	0.40	2.0	μμf
Section 2	0.32	2.0	μμf

‡JETEC shield 315 connected to cathode.

MAXIMUM RATINGS

(Design center values unless noted)■

	Class A Amplifier	Vertical Deflection Amplifier*
Plate voltage, d-c	300	300 volts
Plate voltage, peak pos. (absolute max.)		1200 volts
Control-grid voltage, peak negative		250 volts
Plate dissipation (each plate)▲	2.75	2.75 watts
Cathode current, average	20	20 ma
Cathode current, peak		60 ma
Control-grid circuit resistance		
Fixed bias	0.25	meg
Cathode bias	1.0	meg

	Vertical Deflection Oscillator*	Horizontal Deflection Oscillator‡
Plate voltage	300	300 volts
Plate dissipation (each plate)	2.75	2.75 watts
Control-grid voltage, peak negative	400	600 volts
Cathode current, average	20	20 ma
Cathode current, peak	60	300 ma
Control-grid circuit resistance	2.2	2.2 megs

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier■

Plate voltage	100	250 volts
Control-grid voltage	0	-8.5 volts
Plate resistance (approx.)	6500	7700 ohms
Transconductance	3100	2200 μmhos
Amplification factor	20	17
Plate current	11.8	10.5 ma
Grid 1 voltage (approx.) for Ib = 10 μa		-24 volts

NOTES:

*Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.

‡Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

▲Tube protection is needed for no-drive conditions if grid-resistor bias is used.

■Each section.

**7B4 • 7B5 • 7B6 • 7B7 • 7B8 • 7C4
 7C5 • 7C6 • 7C7 • 7E5 • 7E6 • 7E7
 7F7 • 7F8 • 7G7 • 7G8 • 7H7 • 7J7
 7K7 • 7L7 • 7N7 • 7Q7 • 7R7 • 7S7
 7T7 • 7V7 • 7W7 • 7Y4 • 7Y6 • 7X7 /
XXFM • 7Z4**

(See chart for seldom-used tubes)



8AU8




Combined sync amplifier, separator, or clipper, etc., and video or i-f amplifier, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 8.4 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).


*D-c component must not exceed 100 volts max.



Type 8AU8 is identical to type 6AU8 except for heater characteristics. See type 6AU8 for ratings and operating characteristics.



8BA8A




Combined sync separator or sync clipper, etc. and video amplifier, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 8.4 volts
 Current..... 450 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts
 Warm-up time..... 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.



Type 8BA8A is identical to type 6BA8A except for heater characteristics. See type 6BA8A for ratings and operating characteristics.

CBS ELECTRON TUBES




8BH8



Combined sync separator, clipper, amplifier, or sweep oscillator, and i-f or video amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	8.4 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
*D-c component must not exceed 100 volts max.	



Type 8BH8 is identical to type 6BH8 except for heater characteristics. See type 6BH8 for ratings and operating characteristics.




8CG7



Amplifier or television sweep oscillator, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	8.4 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
*D-c component must not exceed 100 volts max.	



Type 8CG7 is identical to type 6CG7 except for heater characteristics. See type 6CG7 for ratings and operating characteristics.




8CM7



Combined vertical deflection oscillator and amplifier with dissimilar sections

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	8.4 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
*D-c component must not exceed 100 volts max.	




Type 8CM7 is identical to type 6CM7 except for heater characteristics. See type 6CM7 for ratings and operating characteristics.

CBS ELECTRON TUBES



8CN7




Combined horizontal phase detector and reactance tube in TV, or triode for audio or sync service

HEATER CHARACTERISTICS

	Series	Parallel†	
Voltage, a-c or d-c...	8.4	4.2	volts
Current.....	225	450	ma
Peak heater-cathode voltage, max.			
Heater negative to cathode....	200	200	volts
Heater positive to cathode*...	200	200	volts
†Warm-up time.....	11	secs. average	

*D-c component must not exceed 100 volts max.



Type 8CN7 is identical to type 6CN7 except for heater characteristics. See type 6CN7 for ratings and operating characteristics.



8CS7




TV vertical deflection amplifier and oscillator, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	8.4	volts
Current.....	450	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11	secs. average


*D-c component must not exceed 100 volts max.



Type 8CS7 is identical to type 6CS7 except for heater characteristics.



8SN7GTB




TV sweep oscillator and vertical amplifier; phase inverter and R-C amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	8.4	volts
Current.....	450	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11	secs. average

*D-c component must not exceed 100 volts max.



Type 8SN7GTB is identical to type 6SN7GTB except for heater characteristics. See type 6SN7GTB for ratings and operating characteristics.

CBS ELECTRON TUBES




9AU7



TV sweep oscillator and vertical amplifier or phase inverter

HEATER CHARACTERISTICS

	Series	Parallel†
Voltage, a-c or d-c...	9.4	4.7 volts
Current.....	225	450 ma
Peak heater-cathode voltage, max.	Heater negative to cathode..... 200 volts	
	Heater positive to cathode*..... 200 volts	
†Warm-up time.....	11 secs. average	
*D-c component must not exceed 100 volts max.		



Type 9AU7 is identical to types 7AU7, 12AU7 and 12AU7A except for heater characteristics. See type 7AU7 for ratings and characteristics.




9CL8



Vhf oscillator and mixer, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	9.5 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	Heater negative to cathode..... 200 volts
	Heater positive to cathode*..... 200 volts
Warm-up time.....	11 secs. average
*D-c component must not exceed 100 volts max.	



Type 9CL8 is identical to types 5CL8 and 6CL8 except for heater characteristics. See type 5CL8 for ratings and operating characteristics.




9U8A



Vhf oscillator and mixer, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	9.45 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	Heater negative to cathode..... 200 volts
	Heater positive to cathode*..... 200 volts
Warm-up time.....	11 secs. average
*D-c component must not exceed 100 volts max.	




Type 9U8A is identical to types 5U8 and 6U8 except for heater characteristics. See type 5U8 for ratings and operating characteristics.

CBS ELECTRON TUBES




9X8



Vhf oscillator and mixer, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 9.5 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 100 volts max.




Type 9X8 is identical to types 5X8 and 6X8 except for heater characteristics. Similar, but not identical types, are the 5AT8, 6AT8, 5CG8 and 6CG8. See type 5X8 for ratings and operating characteristics.

10

(See chart for seldom-used tubes)




10C8



Vertical oscillator, voltage amplifier or sync triode and a general purpose pentode amplifier, warm-up time controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 10.5 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

Grid to plate: g1 to p.....	1.6	μμf
Input: g1 to k + h.....	2.4	μμf
Output: p to k + h.....	0.2	μμf

Pentode Section

Grid to plate: g1 to p.....	0.04	μμf
Input: g1 to k + h + g2 + g3.....	7.0	μμf
Output: p to k + h + g2 + g3.....	2.0	μμf
Coupling: pentode grid 1 to triode plate, max.....	0.008	μμf
Coupling: pentode plate to triode grid, max.....	0.006	μμf
Coupling: pentode plate to triode plate, max.....	0.06	μμf

CBS ELECTRON TUBES

10C8 (cont.)

MAXIMUM RATINGS (Design maximum values)

Class A Amplifier	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....		300 volts
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.0	2.2 watts
Grid 2 dissipation.....		0.55 watts
Grid 1 circuit resistance		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

Vertical Oscillator and Amplifier†	Amplifier▲	Oscillator▼
Plate voltage, d-c.....	300	300 volts
Plate voltage, peak positive pulse.....	1000	volts
Grid 1 voltage, peak negative.....	250	400 volts
Plate dissipation.....	2.5*	1.0 watts
Cathode current, d-c.....	18	12 ma
Cathode current, peak.....	55	35 ma
Grid 1 circuit resistance		
Fixed bias.....		2.2 meg
Cathode bias.....	2.2	2.2 meg
Grid-leak bias.....	2.2	2.2 meg

CHARACTERISTICS AND TYPICAL OPERATION

	Pentode▲	Pentode	Triode
Plate voltage.....	135	135	250 volts
Grid 2 (screen) voltage.....		135	volts
Grid 1 (control-grid) voltage.....	0‡		volts
Cathode-bias resistor.....		100	390 ohms
Plate resistance (approx.).....		190,000	12,000 ohms
Transconductance.....		8000	4400 μ mhos
Amplification factor.....	40		53
Plate current.....	33	11.5	7.3 ma
Grid 2 current.....		3.2	ma
Grid 1 voltage (approx.) for $I_b = 10 \mu$ a.....			-10 volts
Grid 1 voltage (approx.) for $I_b = 50 \mu$ a.....		-6	volts

NOTES:

†Voltage pulse duration must not exceed 2500 μ s in 525-line, 30-frame system.

*Tube protection is needed for no-drive conditions if grid-resistor bias is used.

‡So as not to damage tube, apply for a maximum of 2 seconds.

▲Pentode section triode connected.

▼Triode section.



10DA7




Combined vertical amplifier and oscillator for TV receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	10.5 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
*D-c component must not exceed 100 volts max.	

Type 10DA7 is identical to type 6DA7 except for heater characteristics. See type 6DA7 for ratings and operating characteristics.




11

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




11C5



**Beam power amplifier for a-c/d-c television receivers,
heater warm-up time controlled for
series string operation**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	11.6 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	180 volts
Heater positive to cathode.....	180 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).	



Type 11C5 is identical to type 35C5 except for heater characteristics. See type 35C5 for ratings and operating characteristics.

12 • 12A/112A • 12A4 • 12A5 12A6/GT • 12A7 • 12A8/GT

(See chart for seldom-used tubes)




12AB5



**Audio power amplifier for automobile radios
powered by a 12-volt battery**

HEATER CHARACTERISTICS

Voltage, a-c or d-c*.....	12.6 volts
Current.....	200 ma
Heater-cathode voltage, max.	
Heater negative to cathode, d-c.....	200 volts
Heater positive to cathode, d-c.....	100 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.7	μμf
Input: g1 to k + h + g2 + b.p.....	8.0	μμf
Output: p to k + h + g2 + b.p.....	8.5	μμf

MAXIMUM RATINGS (Design center values)

Plate voltage.....	315 volts
Grid 2 voltage.....	285 volts
Plate dissipation.....	12 watts
Grid 2 dissipation.....	2 watts
Grid circuit resistance	
Fixed bias.....	0.1 meg
Cathode bias.....	0.5 meg
Bulb temperature at hottest point.....	250 °C

CBS ELECTRON TUBES

12AB5 (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier (Single Tube)

Plate voltage.....	250	250	volts
Grid 2 (screen) voltage.....	200	250	volts
Grid 1 (control-grid) voltage.....		-12.5	volts
Cathode bias resistor.....	270		ohms
Plate resistance (approx.).....	0	50,000	ohms
Transconductance.....	4000	4100	μ mhos
Grid 1 input voltage, peak a-f.....	10.5	12.5	volts
Plate current, zero signal.....	33.5	45.0	ma
Plate current, maximum signal.....	36.0	47	ma
Grid 2 current, zero signal.....	1.6	4.5	ma
Grid 2 current, maximum signal.....	3.2	7.0	ma
Load resistance impedance.....	6000	5000	ohms
Power output, maximum signal.....	3.3	4.5	watts

NOTE:

*Heater is designed to be powered from a 12-volt battery in automotive service, and will operate over a range of 10.0 to 15.9 volts encountered in this service. Maximum ratings provide for an adequate safety factor to withstand the wide variation in supply voltages.




12AC6



I-f or r-f amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS*

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	30	volts
Heater positive to cathode.....	30	volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield \downarrow	
Grid to plate: g1 to p, max.....	0.005	0.004	μ μ f
Input: g1 to k + h + g2 + g3.....	4.3	4.3	μ μ f
Output: p to k + h + g2 + g3.....	5.0	5.0	μ μ f

\downarrow JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	30	volts
Grid 2 voltage.....	30	volts
Cathode current.....	20	ma
Grid 1 circuit resistance.....	10	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	12.6	volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage \dagger	12.6	volts
Grid 1 (control-grid) voltage \dagger	0	volts
Plate resistance (approx.).....	0.5	meg
Transconductance \ddagger	730	μ mhos
Plate current.....	550	μ a
Grid 2 current.....	28	μ a
Grid 3 voltage (approx.) for $g_m \ddagger = 10 \mu$ mhos, $E_{c1} = 0V \dagger$	-4.7	volts
Grid 1 voltage (approx.) for $g_m \ddagger = 10 \mu$ mhos, $E_{c3} = 0V$	-7.2	volts

NOTES:

*Type 12AC6 is intended for use in automobile receivers operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.

$\dagger R_{c1} = 2.2$ meg.

\ddagger From grid 1 to plate.

CBS ELECTRON TUBES




12AD6



Combined oscillator-mixer for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS*

Voltage, a-c or d-c.....	12.6 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	30 volts
Heater positive to cathode.....	30 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	
Signal grid to mixer plate: g3 to p, max.....	0.30	0.25	$\mu\mu\text{f}$
R-f input: g3 to all others.....	8.0	8.0	$\mu\mu\text{f}$
Mixer output: p to all others.....	8.0	13.0	$\mu\mu\text{f}$
Oscillator input: g1 to all others.....	5.5	5.5	$\mu\mu\text{f}$
Oscillator output: k to h + g2 & 4 + g3 + p.....	15	20	$\mu\mu\text{f}$
Oscillator grid to cathode: g1 to k + g5.....	3.0	3.0	$\mu\mu\text{f}$
Oscillator grid to mixer plate: g1 to p, max.....	0.1	0.05	$\mu\mu\text{f}$
Oscillator grid to signal grid: g1 to g3, max.....	0.15	0.15	$\mu\mu\text{f}$

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	30 volts
Grid 2 and 4 voltage.....	30 volts
Grid 2 and 4 supply voltage.....	30 volts
Grid 3 voltage, negative d-c.....	-30 volts
Grid 3 voltage, positive d-c.....	0 volts
Cathode current.....	20 ma
Grid 3 circuit resistance.....	10 meg

CHARACTERISTICS AND TYPICAL OPERATION

Converter Service (Self excitation)

Plate voltage.....	12.6 volts
Grid 3 (signal grid) voltage.....	0 volts
Grid 2 and 4 (oscillator anode) voltage.....	12.6 volts
Grid 1 (oscillator grid) resistance.....	33,000 ohms
Grid 3 resistance.....	2.2 meg
Grid 1 (oscillator grid) voltage, rms.....	1.6 volts
Plate resistance (approx.).....	1.0 meg
Conversion transconductance.....	260 μmhos
Cathode current.....	2000 μa
Plate current.....	450 μa
Grid 2 and 4 (oscillator anode) current.....	1500 μa
Grid 1 (oscillator grid) current.....	50 μa
Grid 3 voltage (approx.) for $g_c = 5 \mu\text{mhos}$	-2.2 volts
Grid 3 voltage (approx.) for $g_c = 20 \mu\text{mhos}$	-1.8 volts

Oscillator Characteristics, Not Oscillating

Plate voltage.....	12.6 volts
Grid 3 voltage.....	0 volts
Grid 2 and 4 (connected to plate) voltage.....	12.6 volts
Grid 1 (oscillator grid) voltage.....	0 volts
Transconductance between grid 1, and grids 2 & 4 connected to plate.....	3800 μmhos
Amplification factor between grid 1, and grid 2 & 4 connected to plate.....	9.0
Cathode current.....	5.0 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-4.0 volts

NOTE:

*Type 12AD6 is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.

CBS ELECTRON TUBES




12AE6



Combined detector—a-f voltage amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS*

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	30	volts
Heater positive to cathode.....	30	volts



7BT

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	2.0	$\mu\mu\text{f}$
Input: g1 to k + h.....	1.8	$\mu\mu\text{f}$
Output: p to k + h.....	1.1	$\mu\mu\text{f}$
Diode 1 to diode 2.....	0.9	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	30	volts
Cathode current.....	20	ma
Control-grid circuit resistance.....	10	meg
Diode current, average.....	1.0	ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier—Triode Unit

Plate voltage.....	12.6	volts
Control-grid voltage.....	0	volts
Plate resistance (approx.).....	15,000	ohms
Transconductance.....	1000	μmhos
Amplification factor.....	15	
Plate current.....	750	μa

Diode Units

Average diode current with 10 volts applied, each diode..	2.0	ma
---	-----	----

Resistance Coupled Amplifier

Plate supply voltage.....	14.4	volts
Control-grid voltage.....	0	volts
Plate load resistor.....	.47	meg
Control-grid resistor.....	2.2	meg
Input capacitor.....	.01	μf
Output capacitor.....	.01	μf
Grid resistor of following stage.....	2.2	meg
Signal source impedance, max.....	1000	ohms
Voltage gain at 400 cps (measured at an output voltage of 1 volt, rms).....	10	

NOTE:

*Type 12AE6 is intended for use in automobile receivers operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variations encountered in this type of supply.




12AF6



R-f or i-f amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS

Voltage, a-c or d-c*	12.6	volts
Current	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode	16	volts
Heater positive to cathode	16	volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.	0.006	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3	5.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3	4.8	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage	16	volts
Grid 2 voltage	16	volts
Grid voltage, positive d-c	0	volts
Grid 1 circuit resistance	2.2	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	12.6	volts
Grid 3 (suppressor)	connected to cathode at socket	
Grid 2 (screen) voltage	12.6	volts
Grid 1 (control-grid) supply voltage	0	volts
Grid 1 resistor (by passed)	2.2	meg
Plate resistance (approx.)	0.3	meg
Transconductance	1250	μmhos
Plate current	.8	ma
Grid 2 current	.3	ma
Grid 1 voltage (approx.) for $g_m = 40 \mu\text{mhos}$	-2.7	volts

NOTE:

*Type 12AF6 is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.

12AH6 • 12AH7GT

(See chart for seldom-used tubes)




12AJ6



Combined detector—a-f voltage amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6 volts
Current.....	150 ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	30 volts
Heater positive to cathode.....	30 volts



7B1

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	2.0	μμf
Input: g1 to k + h.....	2.2	μμf
Output: p to k + h.....	0.8	μμf
Diode 1 to diode 2.....	0.9	μμf

MAXIMUM RATINGS (Design center values)

Plate voltage.....	30	volts
Cathode current.....	20	ma
Control-grid circuit resistance.....	10	meg
Diode current, average.....	1.0	ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	12.6	volts
Control-grid voltage.....	0	volts
Plate resistance (approx.).....	45,000	ohms
Transconductance.....	1200	μmhos
Amplification factor.....	55	
Plate current.....	750	μa

Diode Units

Average diode current with 10 volts applied, each diode	2.0	ma
---	-----	----

Resistance Coupled Amplifier

Plate supply voltage.....	12.6	volts
Control-grid voltage.....	0	volts
Plate load resistor.....	1.0	meg
Control-grid resistor.....	1.0	meg
Input capacitor.....	0.02	μf
Output capacitor.....	0.01	μf
Grid resistor of following stage.....	2.0	meg
Voltage gain at 400 cps (measured at an output voltage of 1 volt, rms).....	16	

NOTES:

*Type 12AJ6 is intended for use in automobile receivers operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variations encountered in this type of supply.




12AL5



**R-f detector in f-m and television circuits or
low power rectifier**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	330	volts
Heater positive to cathode.....	330	volts



Type 12AL5 is identical to types 3AL5 and 6AL5 except for heater characteristics. See type 3AL5 for ratings and characteristics.




12AL8



Combined detector or voltage amplifier and space charge grid power amplifier for 12-volt A and B supply automobile radio receivers

HEATER CHARACTERISTICS*

Voltage, a-c or d-c.....	12.6 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	30 volts
Heater positive to cathode.....	30 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

Grid to plate: g1 to p.....	12	$\mu\mu\text{f}$
Input: g1 to k + h.....	1.5	$\mu\mu\text{f}$
Output: p to k + h.....	0.3	$\mu\mu\text{f}$

Tetrode Section

Grid to plate: g1 to p.....	0.7	$\mu\mu\text{f}$
Input: g2 to k + h + g1.....	8.0	$\mu\mu\text{f}$
Output: p to k + h + g1.....	1.1	$\mu\mu\text{f}$
Coupling: tetrode grid 2 to triode grid 1.....	.013	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

	Tetrode	Triode
Plate voltage.....	30	30 volts
Grid 1 voltage, positive d-c.....	16	volts
Grid 2 voltage, negative d-c.....	20	volts
Grid 2 circuit resistance.....	2.2	meg
Cathode current.....		20 ma
Grid 1 circuit resistance.....		10 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier (Single Tube)

	Triode	Tetrode
Plate voltage.....	12.6	12.6 volts
Grid 1 (space-charge grid) voltage.....		12.6 volts
Grid 1 triode (control-grid) voltage.....	-0.9†	
Grid 2 tetrode (control-grid) voltage.....		-0.8†▲ volts
Plate resistance.....	27,000	1000 ohms
Amplification factor.....	15	3.0▲
Transconductance.....	550	8000▲ μmhos
Plate current.....	0.25	25 ma
Grid 1 (space-charge grid) current.....		50 ma

Resistance-Coupled Amplifier (Single Tube)

Plate (space-charge grid and heater) supply voltage...	12.6	volts
A-f signal voltage.....	.13	volts
Plate current (tetrode).....	13	ma
Grid 1 (space-charge grid) current.....	50	ma
Load resistance (tetrode).....	800	ohms
Total harmonic distortion.....	8	%
Power output.....	20	mw

NOTES:

*Type 12AL8 is intended for use in automobile receivers operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variations encountered in this type of supply.

†Average contact potential developed across a 2.2 megohm grid resistor.

▲Grid 2.

♠From grid 2 to plate.

♣Grid 1 space-charge grid. Grid 2 control-grid.




12AQ5



General-purpose power amplifier for a-c operated and 12-volt automobile receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 12.6 volts
Current..... 225 ma



7B2

Type 12AQ5 is identical to types 5AQ5 and 6AQ5 except for heater characteristics. See type 5AQ5 for ratings and characteristics.




12AT6



Combined detector, audio amplifier, and automatic-volume-control tube

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 12.6 volts
Current..... 150 ma
Peak heater-cathode voltage, max.
Heater negative to cathode..... 90 volts
Heater positive to cathode..... 90 volts



7B1

Type 12AT6 is identical to type 6AT6 except for heater ratings.




12AT7



Frequency converter or cathode-driven amplifier in the vhf bands

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	Series	Parallel
	12.6	6.3 volts
Current.....	150	300 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode....	90	90 volts
Heater positive to cathode....	90	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2	
Grid to plate: g1 to p.....	1.5	1.5	$\mu\mu\text{f}$
Input: g1 to k + h.....	2.2	2.2	$\mu\mu\text{f}$
Output: p to k + h.....	0.5	0.4	$\mu\mu\text{f}$
Grid (Sect. 1) to grid (Sect. 2).....	.005		$\mu\mu\text{f}$
Plate (Sect. 1) to plate (Sect. 2).....		0.4	$\mu\mu\text{f}$
Heater to cathode.....	2.4	2.4	$\mu\mu\text{f}$

Grounded-grid operation

Plate to cathode.....	0.2	0.2	$\mu\mu\text{f}$
Input.....	4.6	4.6	$\mu\mu\text{f}$
Output.....	1.8	1.8	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)[▲]

Plate voltage.....	300 volts
Plate dissipation.....	2.5 watts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier[▲]

Plate voltage.....	100	180	250 volts
Control-grid voltage.....	-1.0	-1.0	-2.0 volts
Cathode-bias resistor.....	270	90	200 ohms
Plate resistance (approx.).....	15,000	9400	10,900 ohms
Transconductance.....	4000	6000	5500 μmhos
Amplification factor.....	60	62	60
Plate current.....	3.7	11.0	10.0 ma
Control-grid voltage (approx.) for $I_b = 10 \mu\text{a}$	-5	-8	-12 volts

[▲]Each section.




12AU6



R-f or i-f amplifier used in a-c/d-c radio service

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	180 volts
Heater positive to cathode.....	100 volts



Type 12AU6 is identical to types 3AU6 and 6AU6 except for heater characteristics. See type 3AU6 for ratings and characteristics.



12AU7

12AU7A




**TV sweep oscillator and vertical amplifier
or phase inverter**

HEATER CHARACTERISTICS

	Series	Parallel
Voltage, a-c or d-c.....	12.6	6.3 volts
Current.....	150	300 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....		200 volts
Heater positive to cathode*.....		200 volts

*D-c component 100 volts max.

Types 12AU7 and 12AU7A are identical electrically to type 7AU7 except for heater characteristics. The 12AU7A has improved mechanical rigidity and is less subject to microphonics.



12AV5GA




**Horizontal deflection amplifier for television
receiver sweep circuits**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	600	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....		200 volts
Heater positive to cathode*.....		200 volts
Warm-up time.....	11	secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).		

*D-c component must not exceed 100 volts max.

Type 12AV5GA is identical to types 6AV5GA and 25AV5GA except for heater characteristics. See 6AV5GA for ratings and characteristics.






12AV6



Detector, avc, and audio amplifier for ac/dc or 12-volt automobile receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



7BT

Type 12AV6 is identical to types 3AV6 and 6AV6 except for heater characteristics. See type 3AV6 for ratings and characteristics.




12AV7



Radio frequency converter or audio frequency amplifier

HEATER CHARACTERISTICS

Voltage,	Series	Parallel	
a-c or d-c.....	12.6	6.3	volts
Current.....	225	450	ma
Peak heater-cathode voltage, max.			
Heater negative to cathode.....	90	90	volts
Heater positive to cathode.....	90	90	volts



9A

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1		Section 2		
	No Shield	Shield†	No Shield	Shield†	
Grid to plate: g1 to p.....	1.9	1.9	1.9	1.9	μμf
Input: g1 to k + h.....	3.1	3.2	3.1	3.2	μμf
Output: p to k + h.....	0.5	1.3	0.4	1.6	μμf
Plate to cathode:					
p to k.....	0.24	0.24	0.24	0.23	μμf
Plate to grid and heater: p to g1 + h.....	2.0		2.0		μμf
Cathode to grid and heater: k to g + h.....	6.9		6.9		μμf
Cathode to heater: k to h.....	3.8	4.0	3.8	4.0	μμf
Plate to grid, heater, and external shield: p to g1 + h + e.s.....		2.8		3.2	μμf
Cathode to grid, heater, and external shield: k to g1 + h + e.s.....		7.0		7.0	μμf

†JETEC shield 315 connected to cathode.

12AV7 (cont.,

MAXIMUM RATINGS (Design center values)▲

Plate voltage.....	300 volts
Control-grid voltage, negative d-c.....	-50 volts
Plate dissipation.....	2.7 watts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier▲

Plate supply voltage.....	100	150 volts
Cathode-bias resistor.....	120	56 ohms
Plate resistance (approx.).....	6100	4800 ohms
Transconductance.....	6100	8500 μ mhos
Amplification factor.....	37	41
Plate current.....	9	18 ma
Control-grid voltage (approx.) for $I_b = 10 \mu$ a.....	-9	-12 volts

▲Each section.

12AW6

(See chart for seldom-used tubes)



12AX4GT

12AX4GTA



Damper diode for television horizontal sweep circuits

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6 volts
Current.....	0.6 amp
Peak heater-cathode voltage, max.*	

Heater negative to cathode†..... 4400 volts

Heater positive to cathode*..... 300 volts

†Absolute maximum value.

‡D-c component must not exceed 900 volts max.


*D-c component must not exceed 100 volts max.

12AX4GTA

Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

Types 12AX4GT and 12AX4GTA are identical to types 6AX4GT and 25AX4GT except for heater characteristics. See type 6AX4GT for ratings and characteristics.

*Voltage pulse duration must not exceed 10 μ s in a 525-line, 30 frame system.



CBS ELECTRON TUBES



12AX7




Phase inverter or resistance-coupled audio amplifier

HEATER CHARACTERISTICS

Voltage,	Series	Parallel
a-c or d-c.....	12.6	6.3 volts
Current.....	150	300 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode...	200	200 volts
Heater positive to cathode*	200	200 volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2	
Grid to plate: g1 to p.....	1.7	1.7	$\mu\mu\text{f}$
Input: g1 to k + h.....	1.6	1.6	$\mu\mu\text{f}$
Output: p to k + h.....	0.46	0.34	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)[▲]

Plate voltage.....	300 volts
Control-grid voltage, negative d-c.....	50 volts
Control-grid voltage, positive d-c.....	0 volts
Plate dissipation.....	1.0 watt

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier[▲]

Plate voltage.....	100	250 volts
Control-grid voltage.....	-1	-2 volts
Plate resistance (approx.).....	.08	.0625 meg
Transconductance.....	1250	1600 μmhos
Amplification factor.....	100	100
Plate current.....	0.5	1.2 ma

[▲]Each section.

12AY7

(See chart for seldom-used tubes)



12AZ7




Frequency converter or cathode driven amplifier in the vhf bands

HEATER CHARACTERISTICS

Voltage,	Series	Parallel
a-c or d-c.....	12.6	6.3 volts
Current.....	225	450 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode...	200	200 volts
Heater positive to cathode*	200	200 volts

*D-c component must not exceed 100 volts max.



12AZ7 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid Drive	Section 1		Section 2		
	No Shield	Shield†	No Shield	Shield†	
Grid to plate: g1 to p...	1.9	1.9	1.9	1.9	μμf
Input: g1 to k + h.....	3.1	3.2	3.1	3.2	μμf
Output: p to k + h.....	0.5	1.3	0.4	1.6	μμf
Heater to cathode.....	3.8	4.0	3.8	4.0	μμf

Cathode Drive

Plate to cathode:					
p to k.....	0.24	0.23	0.24	0.23	μμf
Cathode to grid and heater: k to g1 + h..	6.9	7.0	6.9	7.0	μμf
Plate to grid and heater: p to g1 + h..	2.0	2.8	2.0	3.2	μμf

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)▲

Plate voltage.....	300 volts
Control-grid voltage, negative d-c.....	50 volts
Plate dissipation.....	2.5 watts
Control-grid circuit resistance	
Fixed bias.....	0.25 meg
Self bias.....	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier▲

Plate supply voltage.....	100	250 volts
Cathode-bias resistor.....	270	200 ohms
Plate resistance (approx.).....	15,000	10,900 ohms
Transconductance.....	4000	5500 μmhos
Amplification factor.....	60	60
Plate current.....	3.7	10 ma
Control-grid voltage (approx.) for I _b = 10 μa..	-5	-12 volts

▲Each section.



12B4

12B4A



Vertical deflection output amplifier for television receivers


HEATER CHARACTERISTICS

Voltage,	Series	Parallel
a-c or d-c.....	12.6	6.3 volts
Current.....	300	600 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....		200 volts
Heater positive to cathode*.....		200 volts

*D-c component 100 volts max.

12B4A

Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield†

Grid to plate: g1 to p.....	4.0	μμf
Input: g1 to k + h.....	6.2	μμf
Output: p to k + h.....	4.2	μμf

†JETEC shield 315 connected to cathode.

CBS ELECTRON TUBES

12B4 • 12B4A (cont.)

MAXIMUM RATINGS (Design center values unless noted)	Vertical	Class A
	Deflection Amplifier Δ	Amplifier
Plate voltage, d-c.....	550	550 volts
Plate voltage, peak pos. (absolute max.) ..	1000	volts
Control-grid voltage, peak negative.....	250	volts
Plate dissipation \blacksquare	5.5	5.5 watts
Cathode current, average.....	30	ma
Cathode current, peak.....	105	ma
Control-grid circuit resistance		
Fixed bias.....		0.47 meg
Self bias.....	2.2	2.2 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	150	volts
Control-grid voltage.....	-17.5	volts
Plate resistance (approx.).....	1030	ohms
Transconductance.....	6300	μ mhos
Amplification factor.....	6.5	
Plate current.....	34	ma
Plate current for $E_{c1} = -23$ volts.....	9.6	ma
Grid 1 voltage (approx.) for $I_b = 200 \mu$ a.....	-32	volts

NOTES:

- Δ Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.
- \blacksquare Tube protection is needed for no-drive conditions if grid-resistor bias is used.

12B7 • 12B8GT

(See chart for seldom-used tubes)




12BA6



R-f or i-f amplifier in a-c/d-c receivers
or 12-volt automobile receivers

HEATER CHARACTERISTICS

Voltage, a-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



Type 12BA6 is identical to types 3BA6 and 6BA6 except for heater characteristics. See type 3BA6 for complete ratings and characteristics.

12BA7

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




12BD6



Gain-controlled r-f or i-f amplifier for a-c/d-c or 12-volt automobile radio equipment

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



Type 12BD6 is identical to type 6BD6 except for heater characteristics.




12BE6



Radio frequency converter in a-c/d-c receivers or 12-volt automobile radios

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



Type 12BE6 is identical to types 3BE6 and 6BE6 except for heater characteristics. See type 3BE6 for ratings and characteristics.




12BF6



Detector, avc, and audio tube for 12-volt automobile radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



Type 12BF6 is identical to type 6BF6 except for heater characteristics.

CBS ELECTRON TUBES



12BH7

12BH7A



Combined sweep oscillator and vertical output amplifier


HEATER CHARACTERISTICS

Voltage,	Series	Parallel
a-c or d-c.....	12.6	6.3 volts
Current.....	300	600 ma
Peak heater-cathode voltage, max.		
Heater neg. to cathode...		200 volts
Heater pos. to cathode*		200 volts

*D-c component must not exceed 100 volts max.

12BH7A

Warm-up time..... 11 secs. average



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1		Section 2		
	Shield†	No Shield	Shield†	No Shield	
Grid to plate:					
g1 to p.....	2.4	2.4	2.4	2.4	μμf
Input: g1 to k + h.	3.3	3.3	3.3	3.3	μμf
Output: p to k + h.	2.0	0.8	2.0	0.8	μμf
Coupling: plate to plate (shield).....		0.6†			μμf
Coupling: plate to plate (no shield)...		0.9			μμf

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS

(Design center values unless noted)

	Vertical Deflection Amplifier†	Class A Amplifier
Plate voltage, d-c.....	500	300 volts
Plate voltage, peak pos. (absolute max.)...	1485	volts
Plate voltage, peak negative.....	-50	-50 volts
Control-grid voltage, peak negative pulse (absolute max.).....	220	volts
Plate dissipation (each plate).....	3.85	3.5 watts
Plate dissipation (total for both plates).....		6.0 watts
Cathode current, average (each section).....	20	20 ma
Control-grid circuit resistance		
Fixed bias.....	1.0	1.0 meg
Self bias.....	2.5	2.5 meg

AVERAGE CHARACTERISTICS

Class A Amplifier

Plate voltage.....	250 volts
Control-grid voltage.....	-10.5 volts
Transconductance (each unit).....	3100 μmhos
Amplification factor.....	17.0
Plate current (each unit).....	11.5 ma

12BH7A

Grid 1 voltage (approx.) for $I_b = 50 \mu a$ and $E_b = 150$ volts.....	-17 volts
--	-----------

12BH7

Grid 1 voltage (approx.) for $I_b = 100 \mu a$ and $E_b = 250$ volts.....	-22 volts
---	-----------

CHARACTERISTICS AND TYPICAL OPERATION

Vertical Deflection Amplifier†

Plate voltage.....	350 volts
Control-grid input voltage	
Negative peak component.....	32 volts
Peak to peak.....	25 volts
Cathode-bias resistor.....	560 ohms
Plate current.....	16 ma
Plate output voltage	
Peak positive pulse component.....	670 volts
Peak to peak.....	230 volts
Sweep height (16RP4 or 16TP4 with 14kv on anode)...	10½ inches

NOTES:

†Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.




12BK5



**Audio power amplifier suitable for small driving voltages,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 12.6 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
- Heater negative to cathode..... 200 volts
- Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component 100 volts max.



Type 12BK5 is identical to types 6BK5, 25BK5, and 50BK5 except for heater ratings. See type 6BK5 for ratings and characteristics.




12BL6



I-f or r-f amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS*

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	30	volts
Heater positive to cathode.....	30	volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield †

Grid to plate: g1 to p, max.....	.006	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	5.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	4.8	$\mu\mu\text{f}$

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	30	volts
Grid 2 voltage.....	30	volts
Cathode current.....	20	ma
Grid 1 circuit resistance.....	10	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	12.6	volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....	12.6	volts
Grid 1 (control-grid) voltage†.....	-0.65	volts
Plate resistance (approx.).....	0.5	meg
Transconductance Δ	1350	μmhos
Plate current.....	1350	μa
Grid 2 current.....	500	μa
Grid 1 & 3 voltage (approx.) for $g_m\Delta = 10 \mu\text{mhos}$	-5.0	volts
Grid 1 voltage (approx.) for $g_m\Delta = 10 \mu\text{mhos}$	-6.0	volts

NOTES:

*Type 12BL6 is intended for use in automobile receivers operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.

†Average contact potential developed across a 2.2 megohm grid resistor.

Δ From grid 1 to plate.



12BQ6GT


12BQ6GA • 12BQ6GTA
12BQ6GTB



**Horizontal deflection amplifier for television receivers,
600-ma series string types**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average†
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).	
*D-c component must not exceed 100 volts max.	



Types 12BQ6GA, 12BQ6GT, 12BQ6GTA and 12BQ6GTB are identical to their 6-volt prototypes, respectively, except for heater characteristics.

†Refers to all types except 12BQ6GT.



12BR7



Combined horizontal phase detector and sync separator

HEATER CHARACTERISTICS

Voltage,	Series	Parallel
a-c or d-c.....	12.6	6.3 volts
Current.....	225	450 ma

Peak heater-cathode voltage, max.


Heater

negative to cathode..... 200 200 volts

Heater

positive to cathode*.... 200 200 volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES — Shield†

Triode Unit

Grid to plate: g1 to p.....	1.9	$\mu\mu\text{f}$
Input: g1 to k + h.....	2.8	$\mu\mu\text{f}$
Output: p to k + h.....	1.0	$\mu\mu\text{f}$

Diode Unit

Input (each diode).....	2.0	$\mu\mu\text{f}$
-------------------------	-----	------------------

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Control-grid voltage, negative d-c.....	-50	volts
Plate dissipation.....	2.5	watts
Diode peak inverse voltage.....	300	volts
Diode peak current.....	60	ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	100	250	volts
Cathode-bias resistor.....	270	200	ohms
Plate resistance (approx.).....	15,000	10,900	ohms
Transconductance.....	4000	5500	μmhos
Amplification factor.....	60	60	
Plate current.....	3.7	10	ma
Control-grid voltage (approx.) for $I_b = 10 \mu\text{a}$	-5	-12	volts
Average diode current with 5 volts d-c applied to each section.....		17	ma



12BV7




**High-output video amplifier for television receivers
with low plate-supply voltage**

HEATER CHARACTERISTICS

Voltage,	Series	Parallel
a-c or d-c.....	12.6	6.3 volts
Current.....	300	600 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	200 volts
Heater positive to cathode*....	200	200 volts

*D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.....	0.055	μf
Input: g1 to k + h + g2 + g3.....	11.0	μf
Output: p to k + h + g2 + g3.....	3.0	μf

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300	volts
Grid 2 voltage.....	175	volts
Grid 1 voltage, negative d-c.....	50	volts
Plate dissipation.....	6.25	watts
Grid 2 dissipation.....	1.0	watt
Grid 1 circuit resistance		
Fixed bias.....	0.25	meg
Self bias.....	1.0	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	250	volts
Grid 3 (suppressor).....	connected to cathode	at socket
Grid 2 (screen) voltage.....	150	volts
Cathode bias resistor.....	68	ohms
Plate resistance (approx.).....	85,000	ohms
Transconductance.....	13,000	μmhos
Plate current.....	27	ma
Grid 2 current.....	6.0	ma
Grid 1 voltage (approx.) for $I_b = 20 \mu\text{a}$	-12	volts



12BY7

12BY7A



High transconductance video output amplifier for television receivers


HEATER CHARACTERISTICS

	Series	Parallel
Voltage, a-c or d-c.....	12.6	6.3 volts
Current.....	300	600 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....		200 volts
Heater positive to cathode*.....		200 volts

12BY7A

Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual.)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	12BY7	12BY7A
Grid to plate: g1 to p, max.....	.063	.063 $\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3 + i.s.....	10.7	10.2 $\mu\mu\text{f}$
Output: p to k + h + g2 + g3 + i.s.....	4.0	3.5 $\mu\mu\text{f}$

MAXIMUM RATINGS

(Design center values)

	12BY7	12BY7A
Plate voltage.....	300	300 volts
Grid 2 voltage.....	180	180 volts
Grid 1 voltage, negative d-c.....	-50	-50 volts
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	6.0	6.5 watts
Grid 2 dissipation.....	1.1	1.1 watts
Grid 1 circuit resistance		
Fixed bias.....	0.25	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

	12BY7	12BY7A
Class A Amplifier		
Plate voltage.....	250	250 volts
Grid 3 (suppressor).....	connected to cathode at socket	
Grid 2 (screen) voltage.....	180	180 volts
Cathode bias resistor.....	100	100 ohms
Plate resistance (approx.).....	90,000	93,000 ohms
Transconductance.....	12,000	11,000 μmhos
Plate current.....	24	26 ma
Grid 2 current.....	5.0	5.75 ma
Grid 1 voltage (approx.) for $I_b = 20 \mu\text{a}$	-8	-11.6 volts
Amplification factor (g1 to g2).....	31.5	28.5




12BZ7



Sync separator and clipper for television receivers

HEATER CHARACTERISTICS

	Series	Parallel
Voltage, a-c or d-c.....	12.6	6.3 volts
Current.....	300	600 ma
Peak heater-cathode voltage, max.....	180	180 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2	
Grid to plate: g1 to p.....	2.5	2.5	$\mu\mu\text{f}$
Input: g1 to k + h.....	6.5	6.5	$\mu\mu\text{f}$
Output: p to k + h.....	0.7	0.55	$\mu\mu\text{f}$
Plate (Sect. 1) to plate (Sect. 2).....	1.3		$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300 volts
Control-grid voltage, negative d-c.....	50 volts
Control-grid voltage, positive d-c.....	0 volts
Plate dissipation.....	1.5 watts
Control-grid circuit resistance (for contact potential bias).....	5.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	250 volts
Control-grid voltage.....	-2.0 volts
Plate resistance (approx.).....	31,800 ohms
Transconductance.....	3200 μmhos
Amplification factor.....	100
Plate current.....	2.5 ma




12C5



Audio power output tube, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode†.....	300 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average (See Series-String Heaters section of APPENDIX in CBS Tube Manual).
†D-c component must not exceed 200 volts max.	
*D-c component must not exceed 100 volts max.	



CBS ELECTRON TUBES

12C5 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.55	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	13	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	9.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	135	volts
Grid 2 voltage.....	117	volts
Plate dissipation.....	5.5	watts
Grid 2 dissipation.....	1.25	watts
Grid 1 circuit resistance		
Fixed bias.....	0.1	meg
Self bias.....	0.5	meg
Bulb temperature at hottest point.....	250	$^{\circ}\text{C}$

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	110	volts
Grid 2 (screen) voltage.....	110	volts
Grid 1 (control-grid) voltage.....	-7.5	volts
Plate resistance (approx.).....	10,000	ohms
Transconductance.....	7500	μmhos
Grid 1 input voltage, peak a-f.....	7.5	volts
Plate current, zero signal.....	49	ma
Plate current, maximum signal.....	50	ma
Grid 2 current, zero signal.....	4.0	ma
Grid 2 current, maximum signal.....	8.5	ma
Load resistance impedance.....	2500	ohms
Total harmonic distortion (approx.).....	9	%
Power output, maximum signal.....	1.9	watts

12C8

(See chart for seldom-used tubes)




12CA5



A-f power amplifier with high output from a low B supply voltage, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	600	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode*	300	volts
Heater positive to cathode†	200	volts
Warm-up time.....	11	secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).		
*D-c component must not exceed 200 volts max.		
†D-c component must not exceed 100 volts max.		



Type 12CA5 is identical to type 6CA5 except for heater characteristics and a maximum grid 1 circuit resistance (fixed bias) rating of 0.1 megohm.

CBS ELECTRON TUBES




12CM6



Audio power amplifier for 12-volt automobile radio receivers

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 12.6 volts
- Current..... 225 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- *D-c component must not exceed 100 volts max.



Type 12CM6 is identical to type 6CM6 except for heater characteristics.




12CN5



Pentode voltage amplifier for rf-if service in 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS*

- Voltage, a-c or d-c..... 12.6 volts
- Current..... 450 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 16 volts
 - Heater positive to cathode..... 16 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	No Shield	Shield†	μμf
Grid to plate: g1 to p, max.....	0.25	0.20	

†JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design center values)

Plate voltage.....	16 volts
Grid 2 voltage.....	16 volts
Grid 1 voltage, positive d-c.....	0 volts
Grid 1 circuit resistance.....	2.2 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	12.6 volts
Grid 3 (suppressor).....	connect to cathode at socket
Grid 2 (screen) voltage.....	12.6 volts
Grid 1 (control-grid) voltage.....	0 volts
Grid 1 resistor (bypassed).....	2.2 meg
Plate resistance (approx.).....	40,000 ohms
Transconductance.....	3800 μmhos
Plate current.....	4.5 ma
Grid 2 current.....	3.5 ma

NOTE:

*This tube is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.

CBS ELECTRON TUBES




12CR6



Combined detector and automatic volume controlled audio amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.....	100	volts



Type 12CR6 is identical to type 6CR6 except for heater ratings.

12CS5 • 12CS6

(See chart for seldom-used tubes)



12CT8




Combined video amplifier and sync separator, amplifier, or clipper, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	600	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11 secs.	average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

Grid to plate: g1 to p.....	2.2	μf
Input: g1 to k + h.....	2.4	μf
Output: p to k + h.....	0.19	μf

Pentode Section

Grid to plate: g1 to p.....	0.044	μf
Input: g1 to k + h + g2 + g3.....	7.5	μf
Output: p to k + h + g2 + g3.....	2.4	μf
Coupling: pentode grid 1 to triode plate, max.....	0.010	μf
Coupling: pentode plate to triode grid, max.....	0.016	μf
Coupling: pentode plate to triode plate, max.....	0.16	μf

CBS ELECTRON TUBES

12CT8 (cont.)

MAXIMUM RATINGS (Design Maximum values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....		300 volts
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.5	2.75 watts
Grid 2 dissipation.....		0.9 watts
Grid 1 circuit resistance		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode	Pentode
Plate voltage.....	150	200 volts
Grid 2 (screen) voltage.....		125 volts
Cathode-bias resistor.....	150	82 ohms
Plate resistance (approx.).....		150kilohms
Transconductance.....	4900	7000 μ hos
Amplification factor.....	40	
Plate current.....	9.0	15 ma
Grid 2 current.....		3.4 ma
Grid 1 voltage (approx.) for $I_b = 100 \mu$ a....	-6.5	-8.0 volts




12CU6



**Horizontal deflection amplifier in television receivers,
heater warm-up time controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).	
*D-c component must not exceed 100 volts max.	



Type 12CU6 is identical to type 6CU6 except for heater characteristics.

CBS ELECTRON TUBES




12CX6



**R-f amplifier for 12-volt A and B supply
automobile radios**

HEATER CHARACTERISTICS*

Voltage, a-c or d-c.....	12.6 volts
Current.....	150 ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	30 volts
Heater positive to cathode.....	30 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.....	0.05	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	7.6	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	6.2	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design maximum values)

Plate voltage.....	33 volts
Grid 2 voltage.....	33 volts
Grid voltage, positive d-c.....	0 volts
Grid 1 circuit resistance.....	10 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	12.6 volts
Grid 2 (screen) voltage.....	12.6 volts
Grid 1 (control-grid) voltage†.....	
Grid 1 resistor.....	2.2 meg
Plate resistance (approx.).....	40,000 ohms
Transconductance Δ	3100 μmhos
Plate current.....	3.0 ma
Grid 2 current.....	1.4 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-4.5 volts

NOTES:


*Type 12CX6 is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variations encountered in this type of supply.

†Contact potential developed across specified grid resistor.

Δ Signal applied in series with 1.0 μf grid leak capacitor.




12CY6



R-f amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS*

Voltage, a-c or d-c.....	12.6	volts
Current.....	200	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode	30	volts
Heater positive to cathode.	30	volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.....	0.18	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	8.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	4.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design maximum values)

Plate voltage.....	33	volts
Grid 2 voltage.....	33	volts
Grid 1 circuit resistance.....	10	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier


Plate voltage.....	12.6	volts
Grid 2 (screen) voltage.....	12.6	volts
Grid 1 (control-grid) voltage.....	0	volts
Grid 1 resistor.....	2.2	meg
Plate resistance (approx.).....	.14	meg
Transconductance.....	3250	μmhos
Plate current.....	1.6	ma
Grid 2 current.....	0.4	ma
Grid 1 voltage (approx.) for $I_b = 10 \mu\text{a}$	-3.0	volts

NOTE:

*Type 12CY6 is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.




12D4



**TV damper diode for horizontal deflection circuits,
heater warm-up time controlled for series-string circuits**

HEATER CHARACTERISTICS

- Voltage..... 12.6 volts
- Current..... 0.6 amps
- Peak heater-cathode voltage, max.
Heater negative to cathode†..... 4400 volts
- Heater positive to cathode*..... 300 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- ‡D-c component must not exceed 900 volts max.
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

- Heater to cathode: h to k..... 3.0 $\mu\mu\text{f}$
- Cathode to plate-and-heater: k to p + h▲..... 8.0 $\mu\mu\text{f}$
- Plate to cathode-and-heater: p to k + h▲..... 6.0 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design maximum values unless noted) TV Damper Service*

- Plate voltage, peak inverse..... 4400 volts
- Plate current, d-c..... 155 ma
- Plate current, d-c (design center)..... 145 ma
- Plate current, peak..... 900 ma
- Plate dissipation..... 5.5 watts

AVERAGE CHARACTERISTICS

- Tube voltage drop at 250 ma..... 22 volts

NOTES:

- *Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.
- †Absolute maximum value.
- ▲Tie unused pins and metal parts to heater.



12DB5



Vertical deflection amplifier for TV receivers


HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	600	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11 secs.	average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.

Type 12DB5 is identical to type 6DB5 except for heater characteristics.




12DF5



Full-wave power rectifier

HEATER CHARACTERISTICS

		Series Parallel	
Voltage, a-c or d-c....	12.6	6.3	volts
Current.....	0.45	0.90	amp
Peak heater-cathode voltage			
A-c, rms.....	225	volts	
D-c.....	450	volts	



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Rectifier Service

Plate voltage, peak inverse.....	1275	volts	
Plate supply voltage, rms (each plate).....	RATING CHART I*	450	volts
Output current, d-c.....	RATING CHART I*		
Plate current, peak steady state (each plate).....	RATING CHART II*	0.35	amp
Plate current, peak transient (each plate).....	RATING CHART III*	2.0	amp

CHARACTERISTICS

Tube Voltage Drop

Conducting 100 ma (each plate).....	40	volts
-------------------------------------	----	-------

TYPICAL OPERATION

Full-Wave Rectifier (Capacitor Input Filter)

Plate supply voltage, rms (each plate).....	325	volts
Plate supply resistance (each plate).....	82	ohms
Filter input capacitor.....	40	μf
Output current, d-c.....	100	ma
Output voltage at filter input, d-c.....	330	volts

Full-Wave Rectifier (Choke Input Filter)

Plate supply voltage, rms (each plate).....	450	volts
Filter input choke.....	10	henrys
Output current, d-c.....	100	ma
Output voltage at filter input, d-c.....	360	volts

NOTES:

*Rating Charts given in APPENDIX of CBS Tube Manual.

†A-c plate voltage is measured without load.




12DK5



I-f or r-f amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS*

Voltage, a-c or d-c.....	12.6 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	16 volts
Heater positive to cathode.	16 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Shield↓

Grid to plate: g1 to p, max.....	.045	μμf
Input: g1 to k + h + g2 + g3.....	9.5	μμf
Output: p to k + h + g2 + g3.....	2.65	μμf

↓JETEC shield 315 connected to cathode

MAXIMUM RATINGS (Design maximum values)

Plate voltage.....	16 volts
Grid 2 voltage.....	16 volts
Grid voltage, positive d-c.....	0 volts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	12.6 volts
Grid 3 (suppressor).....	0 volts
Grid 2 (screen) voltage.....	12.6 volts
Plate resistance (approx.).....	0.1 meg
Transconductance.....	3300 μmhos
Plate current.....	2.0 ma
Grid 2 current.....	0.65 ma
Grid 1 voltage (approx.) for $I_b = 10 \mu a$	2.5 volts
Grid leak resistor (bypassed).....	2.2 meg

NOTE:

*Type 12DK5 is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variations encountered in this type of supply.



12DM5




Beam power audio output amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.



CBS ELECTRON TUBES

12DM5 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.55	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	13	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	9.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	135	volts
Grid 2 voltage.....	117	volts
Plate dissipation.....	5.5	watts
Grid 1 circuit resistance		
Fixed bias.....	0.1	meg
Self bias.....	0.5	meg
Bulb temperature at hottest point.....	250	$^{\circ}\text{C}$

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	110	volts
Grid 2 (screen) voltage.....	110	volts
Plate resistance (approx.).....	14,000	ohms
Transconductance.....	7500	μmhos
Grid 1 input voltage, peak a-f.....	7.5	volts
Plate current, zero signal.....	49	ma
Plate current, maximum signal.....	50	ma
Grid 2 current, zero signal.....	4.0	ma
Grid 2 current, maximum signal.....	8.5	ma
Load resistance impedance.....	2500	ohms
Total harmonic distortion (approx.).....	9	%
Power output, maximum signal.....	1.9	watts



12DQ6


12DQ6A



High efficiency horizontal deflection amplifier for television receivers, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	600	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11	secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).		
*D-c component must not exceed 100 volts max.		



Types 12DQ6 and 12DQ6A are identical to type 6DQ6 and 6DQ6A respectively, except for heater characteristics.

12F5GT

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




12F8



**Combined detector—a-f voltage amplifier for 12-volt
A and B supply automobile radios**

HEATER CHARACTERISTICS*

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode	30	volts
Heater positive to cathode.	30	volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.....	.06	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	4.5	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	3.0	$\mu\mu\text{f}$
Diode 1 to diode 2.....	0.3	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	30	volts
Grid 2 voltage.....	30	volts
Grid voltage, positive d-c.....	0	volts
Diode current, average.....	1.0	ma
Grid 1 circuit resistance.....	10	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	12.6	volts
Grid 3 (suppressor).....	connected to cathode	at socket
Grid 2 (screen) voltage.....	12.6	volts
Grid 1 (control-grid) voltage.....	0	volts
Plate resistance (approx.).....	.33	meg
Transconductance.....	1000	μmhos
Plate current.....	1.0	ma
Grid 2 current.....	0.38	ma
Grid 1 voltage (approx.) for $g_m = 10 \mu\text{mhos}$	-5.0	volts
Average diode current with 10 volts, d-c, applied.....	2.0	ma

NOTE:

*Type 12F8 is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.

12G4 • 12H4 • 12H6

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




12J5GT



Audio voltage amplifier or phase inverter and general purpose triode amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



Type 12J5GT is identical to type 6J5GT except for heater characteristics.

12J7G/GT

(See chart for seldom-used tubes)




12J8



Detector and power amplifier driver for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS*

Voltage, a-c or d-c.....	12.6 volts
Current.....	325 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	30 volts
Heater positive to cathode.	30 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Tetrode grid to plate: g1 to p.....	0.70	$\mu\mu\text{f}$
Tetrode input: g1 to Tk + h + g2.....	10.5	$\mu\mu\text{f}$
Tetrode output: p to Tk + h + g2.....	4.4	$\mu\mu\text{f}$
Diode 1 plate to tetrode grid 1, max.....	0.04	$\mu\mu\text{f}$
Diode 2 plate to tetrode grid 1, max.....	0.015	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	30 volts
Grid 2 voltage.....	30 volts
Average diode current, each diode.....	5.0 ma
Grid 1 circuit resistance.....	10 meg

CBS ELECTRON TUBES

12J8 (cont.)

TYPICAL OPERATION

Class A Driver Amplifier

Plate voltage.....	12.6	volts
Grid 2 (screen) voltage.....	12.6	volts
Grid 1 (control-grid) voltage.....	0	volts
Grid 1 resistor.....	2.2	meg
Plate resistance (approx.).....	6000	ohms
Transconductance.....	5500	μ mhos
Grid 1 input voltage, a-f (rms).....	1.6	volts
Plate current, zero signal.....	12	ma
Grid 1 resistor bypass capacitor.....	1.0	μ f
Grid 2 current, zero signal.....	1.5	ma
Load resistance impedance.....	2700	ohms
Total harmonic distortion (approx.).....	5	%
Power output, maximum signal.....	20	mw
Average diode 1 current at 5.0 volts d-c.....	8.5	ma
Average diode 2 current at 5.0 volts d-c.....	12.0	ma

NOTE:

*Type 12J8 is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.




12K5



**Space-charge power amplifier driver for 12-volt
A and B supply automobile radios**

HEATER CHARACTERISTICS

Voltage, a-c or d-c*.....	12.6	volts
Current.....	400	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode	30	volts
Heater positive to cathode.	30	volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage.....	30	volts
Grid 1 (space-charge) voltage, positive d-c (absolute max.).....	16	volts
Grid 1 supply voltage.....	30	volts
Grid 2 (control-grid) voltage, negative d-c.....	-20	volts
Grid 2 circuit resistance.....	10	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Driver

Plate voltage.....	12.6	12.6	volts
Grid 2 (control-grid) voltage.....	-2.0 Δ	-0.5 \dagger	volts
Grid 1 (space-charge grid) voltage.....	12.6	12.6	volts
Plate resistance.....		480	ohms
Transconductance (grid 2 to plate).....		15,000	μ mhos
Amplification (grid 2 to plate).....		7.2	
Peak a-f grid 2 voltage.....	2.5		volts
A-f signal source resistance.....	100,000		ohms
Load resistance.....	800		ohms
Plate current.....	8.0	40	ma
Grid 1 current.....	75	75	ma
Power output.....	40		mw
Total harmonic distortion.....	10		%

NOTES:

*Type 12K5 is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.

\dagger Average bias developed across a 2.2 meg. resistor.

Δ Measured across a 2.2 meg. resistor by grid 2 rectification with a zero plate signal equal to approximately 40 ma.

\dagger Grid 1 space-charge grid. Grid 2 control-grid.


CBS ELECTRON TUBES

12K7G/GT • 12K8/GT

(See chart for seldom-used tubes)



12L6GT




**Audio power output tube in TV receivers,
heater warm-up time controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	300 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage.....	200 volts
Grid 2 voltage.....	125 volts
Plate dissipation.....	10 watts
Grid 2 dissipation.....	1.25 watts
Grid 1 circuit resistance	
Fixed bias.....	0.1 meg
Self bias.....	0.5 meg

CBS ELECTRON TUBES

12L6GT (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	110	200	volts
Grid 2 (screen) voltage	110	125	volts
Grid 1 (control-grid) voltage	-7.5		volts
Cathode bias resistor		180	ohms
Plate resistance (approx.)	13,000	28,000	ohms
Transconductance	8000	8000	μ mhos
Grid 1 input voltage, peak a-f.	7.5	8.5	volts
Plate current, zero signal	49	46	ma
Plate current, maximum signal	50	47	ma
Grid 2 current, zero signal	4.0	2.2	ma
Grid 2 current, maximum signal	10	8.5	ma
Load resistance impedance	2000	4000	ohms
Power output, maximum signal	2.1	3.8	watts
Total harmonic distortion	10	10	%

12L8GT • 12Q7G/GT • 12S8

(See chart for seldom-used tubes)




12SA7GT



Pentagrid converter for radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c	12.6	volts
Current	150	ma
Peak heater-cathode voltage, max.	90	volts



Type 12SA7GT is identical to type 6SA7GT except for heater characteristics.


12SC7 • 12SF5/GT • 12SF7

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




12SG7



R-f or i-f amplifier in wideband applications

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	90	volts
Heater positive to cathode.....	90	volts



Type 12SG7 is identical to type 6SG7 except for heater characteristics.


12SH7 • 12SJ7/GT

(See chart for seldom-used tubes)



12SK7


12SK7GT



Gain controlled r-f or i-f amplifier in radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6	volts
Current.....	150	ma



Types 12SK7 and 12SK7GT are identical to types 6SK7 and 6SK7GT, respectively except for heater characteristics.

12SL7GT


(See chart for seldom-used tubes)

CBS ELECTRON TUBES



12SN7GT

12SN7GTA




General purpose amplifier, phase inverter or oscillator

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 12.6 volts
Current..... 300 ma

12SN7GTA


Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).



Type 12SN7GT is identical to type 6SN7GT except for heater characteristics. Type 12SN7GTA is identical to type 6SN7GTB except for heater characteristics.




12SQ7GT



Combined detector, avc, and audio amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 12.6 volts
Current..... 150 ma
Peak heater-cathode voltage, max..... 90 volts



Type 12SQ7GT is identical to type 6SQ7GT except for heater characteristics.


12SR7

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




12V6GT



Audio power output amplifier for 12-volt system automobile radios

HEATER CHARACTERISTICS


- Voltage, a-c or d-c..... 12.6 volts
- Current..... 225 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 100 volts
 - Heater positive to cathode*..... 100 volts
- *D-c component must not exceed 100 volts max.



Type 12V6GT is identical to type 6V6GT except for heater characteristics.




12W6GT



Audio output amplifier or vertical deflection amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 12.6 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode*..... 300 volts
 - Heater positive to cathode†..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 200 volts max.
- †D-c component must not exceed 100 volts max.



Type 12W6GT is identical to type 6W6GT except for heater characteristics.




12X4



Full-wave rectifier for 12-volt system automobile receivers

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 12.6 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 450 volts
 - Heater positive to cathode..... 100 volts



5BS

Type 12X4 is identical to type 6X4 except for heater characteristics.

**12Z3 • 12Z5 • 13DE7 • 14A4
 14A5 • 14A7 • 14AF7/XXD • 14B6
 14B8 • 14C5 • 14C7 • 14E6 • 14E7
 14F7 • 14F8 • 14H7 • 14J7 • 14N7
 14Q7 • 14R7 • 14S7 • 14W7 • 14X7
 14Y4 • 14Z3 • 15 • 16 • 16B**

(See chart for seldom-used tubes)




17AV5GA



**Horizontal deflection amplifier in TV receiver
 sweep circuits, heater warm-up time controlled
 for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	16.8 volts
Current.....	450 ma
Peak heater-cathode, voltage max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
*D-c volts must not exceed 100 volts, max.	



Type 17AV5GA is identical to types 6AV5GA, 12AV5GA, and 25AV5GA except for heater characteristics. See type 6AV5GA for ratings and operating characteristics.




17CA5



**A-f power amplifier with high output from a low
 B supply voltage, heater warm-up time controlled
 for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	16.8 volts
Current.....	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode*.....	200 volts
Heater positive to cathode†.....	300 volts
Warm-up time.....	11 secs. average
*D-c component must not exceed 100 volts max.	
†D-c component must not exceed 200 volts max.	



Type 17CA5 is identical to type 12CA5 except for heater ratings, and to 6CA5 and 25CA5 except for a maximum grid 1 circuit resistance (fixed bias) rating of 0.1 megohm and heater ratings. See type 6CA5 for ratings and operating characteristics.

CBS ELECTRON TUBES




17CU5



**Audio output power tube for television receivers,
heater warm-up time controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	16.8	volts
Current.....	450	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode.....	200	volts
Warm-up time.....	11	secs. average



7CV

Type 17CU5 is identical to type 6CU5 except for heater characteristics.



17DQ6


17DQ6A



**High efficiency horizontal deflection amplifier for
television receivers**

HEATER CHARACTERISTICS


Voltage, a-c or d-c.....	16.8	volts
Current.....	450	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode.....	200	volts
Warm-up time.....	11	secs. average



Type 17DQ6 is identical to type 6DQ6 except for heater characteristics;
type 17DQ6A is identical to type 6DQ6A. See types 6DQ6 and 6DQ6A
for ratings and operating characteristics.



17H3




**TV damper diode for horizontal deflection circuits,
warm-up time controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	17.5	volts
Current.....	300	ma
Peak heater-cathode voltage, max.*		
Heater negative to cathode↓.....	2000	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11	secs. average

↓D-c component must not exceed 500 volts max.

*D-c component must not exceed 100 volts max.



9FK

CBS ELECTRON TUBES

17H3 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Heater to cathode: h to k	2.0	$\mu\mu\text{f}$
Cathode to plate-and-heater: k to p + h	5.5	$\mu\mu\text{f}$
Plate to cathode-and-heater: p to k + h	4.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design maximum values unless noted) TV Damper Service*

Plate voltage, peak inverse	2000	volts
Plate current, d-c	75	ma
Plate current, peak steady-state	450	ma
Plate dissipation	3.0	watts

AVERAGE CHARACTERISTICS


Tube voltage drop at 140 ma	22	volts
-----------------------------------	----	-------

NOTE:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.



17L6GT




Audio power output tube in TV receivers, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c	16.8	volts
Current	450	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode	300	volts
Heater positive to cathode*	200	volts
Warm-up time	11	secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.



Type 17L6GT is identical to types 12L6GT, 25L6GT, and 50L6GT except for heater characteristics. See type 12L6GT for ratings and operating characteristics.

18

(See chart for seldom-used tubes)

CBS ELECTRON TUBES



18A5




**Horizontal deflection amplifier for TV receivers,
heater warm-up time controlled for series string circuits**

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	18.5	volts
Current.....	0.30	amp
Peak heater-cathode voltage, max. Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts
Warm-up time.....	11	secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.7	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + b.p.....	13.0	$\mu\mu\text{f}$
Output: p to k + h + g2 + b.p.....	7.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design maximum values unless noted)

Horizontal Deflection Amplifier*

Plate supply voltage, d-c (boost + d-c power supply)...	350	volts
Plate voltage, peak pos. (absolute max.).....	3000	volts
Plate voltage, peak negative pulse.....	600	volts
Grid 2 voltage, d-c.....	160	volts
Grid 1 voltage, peak negative.....	250	volts
Plate dissipation†.....	9.0	watts
Grid 2 dissipation.....	2.5	watts
Cathode current, average.....	90	ma
Cathode current, peak.....	310	ma
Grid 1 circuit resistance.....	1.0	meg
Bulb temperature at hottest point.....	190	°C

AVERAGE CHARACTERISTICS

Plate voltage.....	60	200	volts
Grid 2 (screen) voltage.....	125	125	volts
Grid 1 (control-grid) voltage.....	0‡	-17	volts
Plate resistance (approx.).....		27,000	ohms
Transconductance.....		4800	μmhos
Plate current.....	165	40	ma
Grid 2 current.....	15	1.1	ma
Grid 1 voltage (approx.) for $I_b = 1.0$ ma.....		-36	volts

Triode Connected

Plate and grid 2 voltage (p + g2 tied together).....	125	volts
Grid 1 voltage.....	-17	volts
Amplification factor.....	4.6	

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.

‡Applied only for 2 seconds maximum so as not to damage tube.

19

(See chart for seldom-used tubes)



19AU4GT

19AU4GTA



Damper diode in horizontal deflection circuits of TV receivers, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 18.9 volts
Current..... 600 ma
Peak heater-cathode voltage, max.
Heater negative to cathode†..... 4500 volts
Heater positive to cathode*..... 300 volts


19AU4GTA

Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

†D-c component must not exceed 900 volts.

*D-c component must not exceed 100 volts.

Types 19AU4GT and 19AU4GTA are identical to types 6AU4GT and 6AU4GTA, respectively, except for heater characteristics.



19BG6G

19BG6GA




Horizontal deflection amplifier for television receiver sweep circuits

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 18.9 volts
Current..... 300 ma
Peak heater-cathode voltage, max.
Heater negative to cathode..... 200 volts
Heater positive to cathode*..... 200 volts

*D-c component must not exceed 100 volts, max.

Types 19BG6G and 19BG6GA are identical to types 6BG6G and 6BG6GA, respectively, except for heater characteristics.



19C8

(See chart for seldom-used tubes)




19J6



Vhf oscillator, amplifier, or mixer used in series string heater equipment

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	18.9 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



Type 19J6 is identical to type 5J6 and 6J6 except for heater characteristics. See type 5J6 for ratings and characteristics.




19T8



Combined a-m, f-m detector and audio amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	18.9 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	90 volts
Heater positive to cathode.....	90 volts



Type 19T8 is identical to type 5T8 and 6T8 except for heater characteristics. See type 5T8 for ratings and characteristics.

19V8 • 19X8 • 20 • 22 • 24A • 25 25A6/G/GT • 25A7GT 25AC5GT

(See chart for seldom-used tubes)

CBS ELECTRON TUBES



25AV5GT

25AV5GA



Horizontal deflection amplifier for television receiver sweep circuits

HEATER CHARACTERISTICS


Voltage, a-c or d-c.....	25.0 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.

25AV5GA

Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

Types 25AV5GA and 25AV5GT are identical to types 6AV5GA and 6AV5GT, respectively, except for heater characteristics.



25AX4GT




Damper diode for television horizontal sweep circuits

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	25.0 volts
Current.....	300 ma
Peak heater-cathode voltage, max.*	
Heater negative to cathode.....	4000 volts
Heater positive to cathode.....	100 volts

*Voltage pulse duration must not exceed 10 μ s in a 525 line, 30-frame system.

Type 25AX4GT is identical to types 6AX4GT and 12AX4GT except for heater characteristics. See type 6AX4GT for ratings and characteristics.



25B5 • 25B6G • 25B8

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




25BK5



General purpose power amplifier for service where driving voltage is limited

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 25 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
- Heater negative to cathode..... 100 volts
- Heater positive to cathode*..... 100 volts
- *D-c component must not exceed 100 volts max.



Type 25BK5 is identical to types 6BK5, 12BK5, and 50BK5 except for heater characteristics. See type 6BK5 for ratings and characteristics.



25BQ6GT


25BQ6GA • 25BQ6GTB



Horizontal deflection amplifier for television receivers

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 25.0 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
- Heater negative to cathode..... 200 volts
- Heater positive to cathode*..... 200 volts
- *D-c component must not exceed 100 volts max.



Types 25BQ6GA, 25BQ6GT, and 25BQ6GTB are identical to types 6BQ6GA, 6BQ6GT, and 6BQ6GTB, respectively, except for heater characteristics.




25C5



Audio power output amplifier in a-c/d-c receivers

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 25 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
- Heater negative to cathode..... 200 volts
- Heater positive to cathode*..... 200 volts
- *D-c component must not exceed 100 volts max.



Type 25C5 is identical to types 12C5 and 50C5 except for heater characteristics. See type 12C5 for ratings and characteristics.

CBS ELECTRON TUBES




25CA5



A-f power amplifier with high output from a low B supply voltage

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 25.0 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- *D-c component must not exceed 100 volts max.



Type 25CA5 is identical to type 6CA5 and 12CA5 except for heater characteristics. See type 6CA5 for ratings and characteristics.



25CD6G


**25CD6GA
25CD6GB**



High efficiency horizontal deflection amplifier for television receivers, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 25.0 volts
- Current..... 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- *D-c component must not exceed 100 volts max.



25CD6GA and 25CD6GB

Warm-up time 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).

Types 25CD6G and 25CD6GA are identical to type 6CD6G except for heater characteristics. Type 25CD6GB is identical to type 6CD6GA except for heater characteristics.




25CU6



Horizontal deflection output tube for television receivers with 300-ma series string heater circuits

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	25.0 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
*D-c component must not exceed 100 volts max.	



Type 25CU6 is identical to types 6CU6 and 12CU6 except for heater characteristics. See type 6CU6 for ratings and characteristics.

25D8GT

(See chart for seldom-used tubes)




25DN6



Horizontal deflection amplifier with low-voltage, high-current characteristics, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	25.0 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
Warm-up time.....	11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).	
*D-c component 100 volts max.	



Type 25DN6 is identical to type 6DN6 except for heater characteristics.




25DQ6



Horizontal deflection output amplifier with extremely high power sensitivity and high perveance

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 25.0 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- *D-c component must not exceed 100 volts, max.



Type 25DQ6 is identical to types 6DQ6 and 12DQ6 except for heater characteristics. See type 6DQ6 for ratings and characteristics.




25EC6



110° horizontal deflection amplifier for TV receivers, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 25 volts
- Current..... 0.6 amp
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

- Grid to plate: g1 to p..... 0.6 μf
- Input: g1 to k + h + g2 + b.p..... 24 μf
- Output: p to k + h + g2 + b.p..... 10 μf

MAXIMUM RATINGS (Design maximum values unless noted)

Horizontal Deflection Amplifier*

- Plate supply voltage, d-c (boost + d-c power supply) ... 700 volts
- Plate voltage, peak positive pulse..... 7000 volts
- Plate voltage, peak negative pulse..... 1500 volts
- Grid 2 voltage, d-c..... 175 volts
- Grid 1 voltage, peak negative..... 300 volts
- Plate dissipation†..... 10 watts
- Grid 2 dissipation..... 4.0 watts
- Cathode current, average..... 200 ma
- Cathode current, peak..... 700 ma
- Grid 1 circuit resistance, grid leak bias..... 1.5 meg
- Bulb temperature at hottest point..... 225 °C

25EC6 (cont.)

AVERAGE CHARACTERISTICS

Plate voltage.....	60	135	volts
Grid 2 (screen) voltage.....	135	135	volts
Grid 1 (control-grid) voltage.....	0†	-22.5	volts
Plate resistance (approx.).....	4700		ohms
Transconductance.....		7500	μmhos
Plate current.....	350	70	ma
Grid 2 current.....	40	4.5	ma
Grid 1 voltage (approx.) for $I_b = 1.0$ ma.....		-42	volts
Triode amplification factor (p + g2 tied together).....		3.8	

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.

‡Applied only for two seconds maximum so as not to damage tube.



25F5




Beam power amplifier for a-c/d-c radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	25	volts
Current.....	150	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.57	μμf
Input: g1 to k + h + g2 + b.p.....	12.0	μμf
Output: p to k + h + g2 + b.p.....	6.0	μμf

MAXIMUM RATINGS (Design center values)

Plate voltage.....	135	volts
Grid 2 voltage.....	117	volts
Plate dissipation.....	4.5	watts
Grid 1 circuit resistance		
Fixed bias.....	0.1	meg
Self bias.....	0.5	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Single tube	Two tubes (Push pull)
Plate voltage.....	110	110 volts
Grid 2 (screen) voltage.....	110	110 volts
Grid 1 (control-grid) voltage.....	-7.5	-8.0 volts
Plate resistance (approx.).....	16,000	ohms
Transconductance.....	5800	μmhos
Grid 1 input voltage, peak a-f.....	7.5	16† volts
Plate current, zero signal.....	36	70 ma
Plate current, maximum signal.....	37	78 ma
Grid 2 current, zero signal.....	3.0	7.5 ma
Grid 2 current, maximum signal.....	7.0	13.6 ma
Load resistance impedance.....	2500	4500 ohms
Total harmonic distortion (approx.).....	10	2.6 %
Power output, maximum signal.....	1.2	2.9 watts

NOTE:

†Grid to grid.

CBS ELECTRON TUBES




25L6GT



Audio power output amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	25.0 volts
Current.....	300 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts
*D-c component must not exceed 100 volts max.	




Type 25L6GT is identical to types 12L6GT and 50L6GT except for heater characteristics. See type 12L6GT for ratings and characteristics.

25N6G • 25Y5

(See chart for seldom-used tubes)



25W4GT




Damper diode in horizontal sweep circuits of television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 25.0 volts
 Current..... 300 ma
 Peak heater-cathode voltage, max.†
 Heater negative to cathode..... 500 volts
 Heater positive to cathode*..... 200 volts
 *D-c component must not exceed 100 volts, max.

†Voltage pulse duration must not exceed 10 μ s in a 525, 30-frame system.



Type 25W4GT is identical to type 6W4GT except for heater characteristics and capacitances. Direct interelectrode capacitances are not specified by RETMA for the 25W4GT.

25W6GT • 25Z5

(See chart for seldom-used tubes)




25Z6GT



H-w rectifier or voltage doubler for a-c/d-c receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 25.0 volts
 Current..... 0.3 amp
 Peak heater-cathode voltage, max..... 350 volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Rectifier or Doubler Service

Plate voltage, peak inverse..... 700 volts
 Output current, d-c..... 0.075 amp
 Plate current, peak steady state (each plate)..... 0.45 amp

CHARACTERISTICS

Tube Voltage Drop

Conducting 150 ma (each plate)..... 22 volts

TYPICAL OPERATION

Half-Wave Rectifier (Capacitor Input Filter)

Plate supply voltage, rms (each plate)..... 117 235 volts
 Plate supply resistance (each plate)†..... 15 100 ohms
 Filter input capacitor..... 16 16 μ f
 Output current, d-c (each plate)..... 75 75 ma
 Output voltage at filter input, d-c..... 115 255 volts

CBS ELECTRON TUBES

25Z6GT (cont.)

TYPICAL OPERATION

Voltage Doubler

	Half-Wave	Full-Wave
Plate supply voltage, rms (each plate).....	117	117 volts
Filter input capacitor.....	16	16 μ f
Plate supply impedance (each plate).....	30	15 ohms
Output current, d-c.....	75	75 ma
Output voltage at filter input, d-c		
At half-load current of 37.5 ma.....		250 volts
At full-load current of 75 ma.....		205 volts

NOTES:

*As a half-wave rectifier, the two sections may be used separately or in parallel.

†When filter capacitors larger than 40 μ f are used it may be necessary to increase plate supply resistance above the value given.

26 • 26A6 • 26A7 • 26C6 • 26D6 27 • 28Z5 • 30 • 31 • 32 • 32L7GT 33 • 34 • 35/51 • 35A5

(See chart for seldom-used tubes)




35B5



Beam power amplifier for a-c/d-c radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	35 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	180 volts
Heater positive to cathode	180 volts



Type 35B5 is identical to type 35C5 except for basing and direct interelectrode capacitances.

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.7	μ f
Input: g1 to k + h + g2 + b.p.....	12	μ f
Output: p to k + h + g2 + b.p.....	9	μ f

CBS ELECTRON TUBES




35C5



Beam power amplifier for a-c/d-c radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	35 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	180 volts
Heater positive to cathode	180 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	0.60	μμf
Input: g1 to k + h + g2 + b.p.....	12	μμf
Output: p to k + h + g2 + b.p.....	9.0	μμf

MAXIMUM RATINGS (Design center values)

Plate voltage.....	135 volts
Grid 2 voltage.....	117 volts
Plate dissipation.....	4.5 watts
Grid 2 dissipation.....	1.0 watts
Grid 1 circuit resistance	
Fixed bias.....	0.1 meg
Self bias.....	0.5 meg
Bulb temperature at hottest point.....	250 °C

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	110 volts
Grid 2 (screen) voltage.....	110 volts
Grid 1 (control-grid) voltage.....	-7.5 volts
Transconductance.....	5800 μmhos
Grid 1 input voltage, peak a-f.....	7.5 volts
Plate current, zero signal.....	40 ma
Plate current, maximum signal.....	41 ma
Grid 2 current, zero signal.....	3 ma
Grid 2 current, maximum signal.....	7 ma
Load resistance impedance.....	2500 ohms
Total harmonic distortion (approx.).....	10 %
Power output, maximum signal.....	1.5 watts




35L6GT



Beam power amplifier for a-c/d-c radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	35.0 volts
Current.....	150 ma
Peak heater-cathode voltage, max.....	90 volts



CBS ELECTRON TUBES

35L6GT (cont.)

ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage.....	200 volts
Grid 2 voltage.....	125 volts
Plate dissipation.....	8.5 watts
Grid 2 dissipation.....	1.0 watts
Grid circuit resistance	
Fixed bias.....	0.1 meg
Self bias.....	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	110	200 volts
Grid 2 (screen) voltage.....	110	125 volts
Grid 1 (control-grid) voltage.....	-7.5	0 volts
Cathode bias resistor.....	0	180 ohms
Plate resistance (approx.).....	14,000	34,000 ohms
Transconductance.....	5800	6100 μ mhos
Grid 1 input voltage, peak a-f.....	7.5	8.0 volts
Plate current, zero signal.....	40	43 ma
Plate current, maximum signal.....	41	43 ma
Grid 2 current, zero signal.....	3.0	2.0 ma
Grid 2 current, maximum signal.....	7.0	5.5 ma
Load resistance impedance.....	2500	5000 ohms
Total harmonic distortion (approx.).....	10	10 %
Power output, maximum signal.....	1.5	3.0 watts



35W4




Half-wave rectifier for a-c/d-c radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c*.....	35 volts
Current*.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	330 volts
Heater positive to cathode.....	330 volts

*Value given for operation without panel lamp. For values with panel lamp, refer to Typical Operation.



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Half-Wave Rectifier Service

Plate voltage, peak inverse.....	330 volts
Plate current, peak steady state.....	600 ma
Output current, d-c	
With panel lamp but no shunting resistor.....	60 ma
With panel lamp and a shunting resistor*.....	90 ma
Without panel lamp.....	100 ma
Panel lamp voltage, rms	
When panel lamp fails.....	15 volts

CHARACTERISTICS

Tube Voltage Drop

Conducting 200 ma at plate.....	18 volts
---------------------------------	----------

CBS ELECTRON TUBES

35W4 (cont.)

TYPICAL OPERATION

Capacitor Input Filter with No. 40 or No. 47 Panel Lamp

Heater voltage (pin 3 to pin 4)	32	32	32	32	volts
Heater tap voltage (pin 4 to pin 6)	5.5	5.5	5.5	5.5	volts
Heater current (between pins 3 and 6)	150	150	150	150	ma
Plate supply voltage, rms	117	117	117	117	volts
Filter input capacitor	40	40	40	40	μ f
Plate supply impedance	15	15	15	15	ohms
Panel lamp shunting resistor		300	150	100	ohms
Output current, d-c	60	70	80	80	ma

Capacitor Input without Panel Lamp†

Heater voltage (pin 3 to pin 4)	35	volts
Heater tap voltage (pin 4 to pin 6)	7.5	volts
Heater current (between pins 3 and 4)	150	ma
Plate supply voltage, rms	117	volts
Filter input capacitor	40	μ f
Plate supply impedance	15	ohms
Output current, d-c	100	ma
Output voltage at filter input, d-c		
At half-load current of 50 ma	140	volts
At full-load current of 100 ma	120	volts
Voltage regulation (approx.)		
Half-load to full-load current	20	volts

MAXIMUM CIRCUIT VALUES

Panel lamp shunting resistor*		
For d-c output current of 70 ma	800	ohms
For d-c output current of 80 ma	400	ohms
For d-c output current of 90 ma	250	ohms

NOTES:

*Required when d-c output current exceeds 60 ma.

†Plate current must not flow through tap section.

35Y4 • 35Z3

(See chart for seldom-used tubes)



35Z5GT




Half-wave rectifier for a-c/d-c radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c*	35	volts
Current*	150	ma
Peak heater-cathode voltage		
Heater negative to cathode	350	volts
Heater positive to cathode	350	volts

*Value given for operation without panel lamp. For values with panel lamp, refer to Typical Operation.



CBS ELECTRON TUBES

35Z5GT (cont.)

ELECTRICAL DATA

MAXIMUM RATINGS

	With No. 40 or No. 47 Panel Lamp
Plate voltage, peak inverse.....	700 volts
Plate supply voltage, rms.....	235 volts
Plate current, peak steady state.....	600 ma
Output current, d-c	
With panel lamp but no shunting resistor.....	60 ma
With panel lamp and a shunting resistor.....	90 ma
Without panel lamp.....	100 ma
Panel lamp voltage, rms	
When panel lamp fails.....	15 volts
Panel lamp shunting resistor	
For d-c output current of 70 ma.....	800 ohms
For d-c output current of 80 ma.....	400 ohms
For d-c output current of 90 ma.....	250 ohms

CHARACTERISTICS

Tube Voltage Drop

Conducting 200 ma at plate.....	18 volts
---------------------------------	----------

TYPICAL OPERATION

Capacitor Input Filter with No. 40 or No. 47 Panel Lamp

Heater voltage (pin 2 to pin 7).....	32	32	32	32	32 volts
Heater tap voltage (pin 2 to pin 3).....	5.5	5.5	5.5	5.5	5.5 volts
Heater current (between pins 3 and 7).....	150	150	150	150	ma
Plate supply voltage, rms.....	117	117	117	117	235 volts
Filter input capacitor.....	40	40	40	40	40 μ f
Plate supply impedance.....	15	15	15	15	100 ohms
Panel lamp shunting resistor.....	300	150	100		ohms
Output current, d-c.....	60	70	80	90	60 ma

Capacitor Input without Panel Lamp†

Heater voltage (pin 2 to pin 7).....	35	35	35 volts
Heater tap voltage (pin 2 to pin 3).....	7.5	7.5	7.5 volts
Heater current (between pin 3 and 7).....	150	150	ma
Plate supply voltage, rms.....	117	235	volts
Filter input capacitor.....	40	40	μ f
Plate supply impedance.....	15	100	ohms
Output voltage at filter input, d-c			
At half-load current of 50 ma.....	140	280	volts
At full-load current of 100 ma.....	120	235	volts
Difference in voltage regulation.....	20	45	volts
Percentage regulation.....	14	16	%
Output current, d-c.....	100	100	ma

MAXIMUM CIRCUIT VALUES

Panel lamp shunting resistor†	
For d-c output current of 70 ma.....	800 ohms
For d-c output current of 80 ma.....	400 ohms
For d-c output current of 90 ma.....	250 ohms

NOTES:

†Required when d-c output current exceeds 60 ma.

*Plate current must not flow through tap section.


35Z6GT • 36 • 37 • 38 • 39/44 • 40
40Z5/45Z5GT • 41 • 42 • 43 • 44
45 • 45A • 45Z3 • 46 • 47 • 48 • 49
50 • 50A5 • 50AX6G

(See chart for seldom-used tubes)

CBS ELECTRON TUBES




50B5



Beam power amplifier for a-c/d-c radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	50 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	90 volts
Heater positive to cathode.	90 volts




7BZ

Type 50B5 is identical to type 50C5 except for basing, and to type 12C5 except for basing and heater characteristics. See type 12C5 for ratings and characteristics.



50C5




Audio power output amplifier in a-c/d-c receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	50 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode*.....	200 volts

*D-c component must not exceed 100 volts max.



7CY


Type 50C5 is identical to type 12C5 and 25C5 except for heater characteristics and capacitances. See type 12C5 for ratings and characteristics.

50C6G

(See chart for seldom-used tubes)




50L6GT



Beam power amplifier for a-c/d-c radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	50.0 volts
Current.....	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	90 volts
Heater positive to cathode.	90 volts



Type 50L6GT is identical to types 12L6GT and 25L6GT except for heater characteristics. See type 12L6GT for ratings and characteristics.

CBS ELECTRON TUBES

50X6 • 50Y6G • 50Y7GT
50Z7GT • 51 • 51S • 52 • 53 • 55
55S • 56 • 56AS • 57 • 57AS • 58
58AS • 59 • 64 • 64A • 65 • 65A • 67
67A • 68 • 68A • 70A7GT • 70L7GT
71 • 71A • 71B • 75 • 76 • 78 • 79 • 80
81 • 82V • 84/6Z4 • 85 • 85AS • 88
89 • 89Y • 95 • 96 • 117L7GT
117N7GT • 117P7GT
117Z4GT

(See chart for seldom-used tubes)




117Z3



Half-wave power rectifier used in 3-way portable radio receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 117 volts
 Current..... .04 amp
 Peak heater-cathode voltage, max.
 Heater negative to cathode 175 volts
 Heater positive to cathode 100 volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Rectifier Service

Plate voltage, peak inverse..... 330 volts
 Plate current, peak steady state..... .54 amp
 Plate current, peak transient..... 1.8 amp

TYPICAL OPERATION


Half-Wave Rectifier

Plate supply voltage, rms..... 117 volts
 Output current, d-c..... 90 ma

CBS ELECTRON TUBES




117Z6GT



Full-wave voltage doubler with power-line voltage heater rating

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	117 volts
Current.....	.075 amp
Peak heater-cathode voltage, max.....	350 volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Rectifier or Doubler Service

Plate voltage, peak inverse.....	700 volts
Output current, d-c.....	.60 amp
Plate current, peak steady state (each plate).....	.36 amp

TYPICAL OPERATION

Half-Wave Rectifier (Capacitor Input Filter)*

Plate supply voltage, rms (each plate).....	117	150	235	volts
Plate supply resistance (each plate).....	15	40	100	ohms
Filter input capacitor.....	40	40	40	μf
Output current, d-c.....	60	60	60	ma

TYPICAL OPERATION

Voltage Doubler

Half-Wave Full-Wave

Plate supply voltage, rms.....	117	117	volts
Filter input capacitor.....	40	40	μf
Output current, d-c.....	60	60	ma
Plate supply resistance (each plate).....	30	15	ohms

NOTES:

*In half-wave rectifier service, the two units may be used separately or in parallel.

182B/482B • 183/483 • 210T 401 • 484 • 950 • 951 • 5642 9002 • 9003 • 9006

(See chart for seldom-used tubes)



SELDOM-USED TUBES

Tube types rarely encountered by the technician. These data are given to aid in identification and replacement or substitution.

- Table I** Diodes
- Table II** Detector-Amplifiers or Rectifier-Amplifiers
- Table III** General Purpose Triodes
- Table IV** Voltage Amplifiers
- Table V** Converters and Mixers
- Table VI** Audio Power Amplifiers
- Table VII** TV Deflection Power Amplifiers
- Table VIII** Indicators (tuning eye)

TYPE	TABLE	TYPE	TABLE	TYPE	TABLE	TYPE	TABLE
00	III	1H5GT	II	2S/4S	I	6AF6G	VIII
00A	III	1H6G GT	II	2V2	I	6AG6G	VI
01	III	1J5G	VI	2V3G	I	6AH5G	VI
01A	III	1J6G GT	VI	2W3/GT	I	6AH7GT	III
01AA	III	1L6	V	2Z2 G84	I	6AJ4	III
01B	III	1LA4/E	VI	3A5	III	6AJ5	IV
1A3	I	1LA6	V	3A8GT	II	6AJ7	IV
1A4P	IV	1LB4	VI	3B7/1291	VI	6AK7	VI
1A4T	IV	1LB6	V	3C6	III	6AN4	III
1A5G/GT	VI	1LC5	IV	3D6	VI	6AN5	VI
1A6	V	1LC6	V	3E5	VI	6AN6	I
1AB5	IV	1LD5	II	3E6	IV	6AQ7GT	II
1AF4	IV	1LE3	III	3LE4	VI	6AR6	VI
1AF5	II	1LF3	III	3LF4	VI	6AS6	IV
1B4/951	IV	1LG5	IV	5AU4	I	6AS7G	III
1B4P	IV	1LH4	II	5AX4GT	I	6AX6G	I
1B4T	IV	1LN5	IV	5AZ4	I	6B4G	VI
1B5 25S	II	1N5GT	IV	5T4	I	6B5	VI
1B6	IV	1N6G	II	5W4/G/GT	I	6B6G	II
1B7G GT	V	1P5G/GT	IV	5X3	I	6B7	II
1B8GT	II	1Q5GT/G	VI	5X4G	I	6B8/G/GT	II
1C5G GT	VI	1Q6	II	5Z4	I	6BA7	V
1C6	V	1R4	I	6A3	VI	6BD5GT	VII
1C7G	V	1S4	VI	6A4	VI	6BD7	II
1C8	V	1SA6GT	IV	6A5G	VI	6BF7	III
1D5GP/GT	IV	1SB6GT	II	6A6	VI	6BG7	III
1D7G	V	1T5GT	VI	6A7	V	6BK6	II
1D8GT	II	1U6	V	6A8/G/GT	V	6BN7	VII
1E4/G	III	1V	I	6AB5/6N5	VIII	6BU5	IV
1E5GP	IV	1W4	VI	6AB6G	VI	6BY5G	I
1E5G/GT	IV	2A3	VI	6AB7/1853	IV	6C6	IV
1E7G/GT	VI	2A3H	VI	6AC5G GT	VI	6C7	II
1F4	VI	2A5	VI	6AC6GT	VI	6C8G	III
1F5G	VI	2A6	II	6AD5G/GT	III	6D5G	III
1F6	II	2A7	V	6AD6G	VIII	6D6	IV
1F7G/GH/GV	II	2A7S	V	6AD7G	VI	6D7	IV
1G4G/GT	III	2B7	II	6AE5GT	III	6D8/G	V
1G5G/GT	VI	2B7S	II	6AE6G	III	6DB6	IV
1G6G/GT	VI	2E5	VIII	6AE7G/GT	III	6E5	VIII
1H4G/GT	III	2G5	VIII	6AF5G	III	6E6	VI

SELDOM-USED TUBES (cont.)

TYPE	TABLE	TYPE	TABLE	TYPE	TABLE	TYPE	TABLE
6E7	IV	7B4	III	14A7	IV	45	VI
6F4	III	7B5	VI	14AF7	III	45A	VI
6F5/G/GT	III	7B6	II	14B6	II	45Z3	I
6F6G/GT	VI	7B7	IV	14B8	V	46	VI
6F7/S	II	7B8	V	14C5	VI	47	VI
6F8G	III	7C4	I	14C7	IV	48	VI
6G5/6H5	VIII	7C5	VI	14E6	II	49	VI
6G6G	VI	7C6	II	14E7	II	50	VI
6H4	I	7C7	IV	14F7	III	50A5	VI
6H4GT	I	7E5	III	14F8	III	50AX6G	I
6H5	VIII	7E6	II	14H7	IV	50C6G	VI
6J4	III	7E7	II	14J7	V	50X6	I
6J7G/GT	IV	7F7	III	14N7	III	50Y6GT	I
6J8G	V	7F8	III	14Q7	V	50Y7GT	I
6K4	III	7G7	IV	14R7	II	50Z7GT	I
6K5G/GT	III	7G8	IV	14S7	V	51	IV
6L5G	III	7H7	IV	14W7	IV	51S	IV
6N4	III	7J7	V	14X7	II	52	VI
6N6G	VI	7K7	II	14Y4	I	53	VI
6P5GT	III	7L7	IV	14Z3	I	55	II
6P7G	II	7N7	III	15	IV	55S	II
6Q6/G	II	7Q7	V	16	I	56	III
6Q7/G/GT	II	7R7	II	16B	I	56AS	III
6R6G	IV	7S7	V	18	VI	57	IV
6R7/G/GT	II	7T7	IV	19	VI	57AS	IV
6R8	II	7V7	IV	19C8	II	58	IV
6S7G	IV	7W7	IV	19V8	II	58AS	IV
6SB7Y	V	7Y4	I	19X8	V	59	VI
6SC5	III	7X6	I	20	VI	64	IV
6SD7GT	IV	7X7	II	22	IV	64A	IV
6SE7GT	IV	7Z4	I	24A	IV	65	IV
6SF5/GT	III	10	VI	25	II	65A	IV
6SF7	II	11	III	25A6 G/GT	VI	67	III
6SR7GT	II	12	III	25A7GT	VI	67A	III
6SS7	IV	12A/112A	VI	25AC5GT	VI	68	VI
6ST7	II	12A4	VII	25B5	VI	68A	VI
6SU7GT	III	12A5	VI	25B6G	VI	70A7GT	VI
6SV7	II	12A6/GT	VI	25B8	II	70L7GT	VI
6SZ7	II	12A7	VI	25C6G	VI	71	VI
6T5	VIII	12A8GT	V	25D8GT	II	71A	VI
6T6	II	12AH6	IV	25N6	VI	71B	VI
6T7G/6Q6G	II	12AH7GT	III	25W6 GT	I	75	II
6U4GT	I	12AW6	IV	25Y5	VI	76	III
6U5	VIII	12AY7	III	25Z5	I	77	IV
6U6GT	VI	12B7	IV	26	III	78	IV
6U7G	IV	12B8GT	II	26A6	IV	79	VI
6V5G/GT	VI	12BA7	V	26A7	VI	80	I
6V7G	II	12C8	II	26C6	II	81	I
6V8	II	12CS5	VI	26D6	V	82	I
6W5G	I	12CS6	IV	27	III	82V	I
6W7G	IV	12F5GT	III	28Z5	I	84/6Z4	I
6X5GT	I	12G4	III	30	III	85	II
6Y3G	I	12H4	III	31	VI	85AS	II
6Y5/V	I	12H6	I	32	IV	88	I
6Y7G	VI	12J7G/GT	IV	32L7GT	VI	89/89Y	VI
6Z3	I	12K7G/GT	IV	33	VI	95	VI
6Z4	I	12K8/GT	V	34	IV	96	I
6Z4/84	I	12L8GT	VI	35/51	IV	117L7/M7GT	VI
6Z5/12Z5	I	12Q7G/GT	II	35A5	VI	117N7GT	VI
6Z7G	VI	12S8	II	35Y4	I	117P7GT	VI
6ZY5G	I	12SC7	III	35Z3	I	117Z4GT	I
7A4	III	12SF5/GT	III	35Z6G	I	182B/482B	VI
7A5	VI	12SF7	II	36	IV	183/483	VI
7A6	I	12SH7	IV	37	III	210T	VI
7A7	IV	12SJ7/GT	IV	38	VI	401	III
7A8	V	12SL7GT	III	39/44	IV	484	III
7AB7	IV	12SR7	II	40	III	950	VI
7AD7	IV	12Z3	I	40Z5/45Z5GT	I	951	IV
7AF7	III	12Z5	I	41	VI	5642	I
7AG7	IV	13	I	42	VI	9002	III
7AH7	IV	14A4	III	43	VI	9003	IV
7AJ7	IV	14A5	VI	44	IV	9006	I

CBS ELECTRON TUBES

TABLE I.

DIODES

TYPE	DESCRIPTION			CONSTRUCTION			CATHODE		MAX. RATINGS		SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION						
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	PEAK INVERSE VOLTS	PEAK PLATE MA	APPLICATION	PLATE SUPPLY VOLTS, RMS (EACH PLATE)	MIN PLATE-SUPPLY IMPEDANCE, Ω	INPUT CAPACITOR, μf	MIN. INPUT CHOKE, H	VOLTAGE DROP EACH SECTION (V. at MA.)	OUTPUT VOLTAGE AT FILTER INPUT	D-C OUTPUT, MA	TYPE
1A3	S	1R4	5AP	Min.-7	Fil.	1.4	0.15	330	5.0	HF Detector & Rectifier	117	0	2.0	—	—	—	0.5	1A3
1R4	S	1A3	4AH	Loctal	Fil.	1.4	0.15	—	—	HF Detector & Rectifier	117	—	—	—	8 at 2.0	—	1	1R4
1V	S	6Z3	4G	Small-4	Htr.	6.3	0.3	1000	270.0	Half-Wave Rectifier	117 150 325	0 30 75	— — —	— — —	20 at 90.0 — —	— — —	45 45 45	1V
2S/4S	D		5D	Small-5	Htr.	2.5	1.35	—	—	Detector	50	Approx. 40 ma per plate			—	50	2S/4S	
2V2	S		8FV	Octal	Fil.	2.5 1.25	0.2 0.4	15,000 21,000 30,000	80.0 80.0 —	High Voltage Rectifier	— — —	— — —	— — —	— — —	— — 150 at 7.0	— — —	2.0 1.0 0.2	2V2
2V3G	S		4Y	Octal	Fil.	2.5	5.0	16,500	12.0	H-W Rectifier	6000	—	—	—	—	—	2.0	2V3G
2W3, GT	S	2Z2/G84	4X	Octal	Fil.	2.5	1.50	—	—	H-W Rectifier	350	Capacitor input to filter				55	2W3, GT	
2Z2/G84	S	2W3GT	4B	Medium-4	Fil.	2.5	1.50	—	—	H-W Rectifier	350	—	—	—	—	—	50	2Z2/G84

TABLE I.(continued) Diodes

		DESCRIPTION			CONSTRUCTION			CATHODE		MAX. RATINGS		SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION						
TYPE	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR. FIL.	VOLTS	AMPERES	PEAK INVERSE VOLTS	PEAK PLATE MA	APPLICATION	PLATE SUPPLY VOLTS, RMS (EACH PLATE)	MIN PLATE SUPPLY IMPEDANCE, Ω	INPUT CAPACITOR, μ F	MIN. INPUT CHOKE, H	VOLTAGE DROP EACH SECTION (V. at MA.)	OUTPUT VOLTAGE AT FILTER INPUT	D-C OUTPUT, MA	TYPE	
5AU4	D		5T	Octal	Fil.	5.0	4.5	1400	1075	F-W Power Rectifier	300 400 500	30 50 —	40 40 —	— — 10	50 at 350 — —	275 395 395	350 325 325	5AU4	
5AX4GT	D		5T	Octal	Fil.	5.0	2.5	1400	525	F-W Power Rectifier	350 500	50 —	10 —	— — 10	— — —	330 375	175 175	5AX4GT	
5AZ4	D	5Y3GT	5T	Loctal	Fil.	5.0	2.0	1400	400	F-W Power Rectifier	350 500	50 —	20 —	— 10	60 at 125 60 at 125	360 380	125 125	5AZ4	
5T4	D	5U4GB	5T	Octal	Fil.	5.0	2.0	1550	675	F-W Power Rectifier	450 550	150 —	— —	— 3	— —	— —	225 225	5T4	
5W4, G, GT	D	5Y4GT	5T	Octal	Fil.	5.0	1.5	1400	300	F-W Power Rectifier	350 500	> 25 —	— —	— 6	45 at 100 45 at 100	— —	100 100	5W4, G, GT	
5X3	D		4C	Medium-4	Fil.	5.0	2.0	—	—	F-W Power Rectifier	400 1275	Choke or Capacitor input to filter Choke or Capacitor input to filter				110 30	5X3		
5X4G	D	5U4GB	5Q	Octal	Fil.	5.0	3.0	1550	675	F-W Power Rectifier	450 550	75 —	40 —	— 3	— 58 at 225	— —	225 225	5X4G	

5Z4	D		5L	Octal	Htr.	5.0	2.0	1400	375	F-W Power Rectifier	350 500	30 —	40 —	— 5	— 20 at 125	— —	125 125	5Z4
6AN6	Q		7BJ	Min.-7	Htr.	6.3	0.2	210	45	Detector	75	—	—	—	9 at 6.6	—	3.3	6AN6
6AX6G	D		7Q	Octal	Htr.	6.3	2.5	1250 2000	600 600	F-W Rectifier Damper	350 350	145 —	40 —	— —	21 at 250 —	350 —	250 —	6AX6G
6BY5G	D		6CN	Octal	Htr.	6.3	1.6	1400 2500	525 525	Rectifier Damper	375 —	100 —	8.0 —	— —	32 at 175 —	380 —	175 —	6BY5G
6H4, GT	S	6H6GT	5AF	Octal	Htr.	6.3	0.15	—	—	Detector	100	—	—	—	—	—	4.0	6H4, GT
6U4GT	D	6W4GT	4CG	Octal	Htr.	6.3	1.2	1375	660	H-W Rectifier	350	145	20	—	21 at 250	335	125	6U4GT
6W5G	D	6X6G	6S	Octal	Htr.	6.3	0.9	—	—	F-W Rectifier	325 450	Capacitor input to filter Choke input to filter					90 90	6W5G
6X5GT	D	6Y5/V	6S	Octal	Htr.	6.3	0.6	1250	210	F-W Power Rectifier	325 450	150 —	40 —	— 10	— 22 at 70	— —	70 70	6X5GT
6Y3G	S		4AC	Octal	Htr.	6.3	0.7	14,000	100	H-W Rectifier	5000	Choke or Capacitor input to filter					7.5	6Y3G
6Y5/V	D	6X5GT	6J	Small-6	Htr.	6.3	0.8	1500	—	F-W Rectifier	350	Capacitor input to filter					50	6Y5/V
6Z3	S	1V	4G	Small-4	Htr.	6.3	0.3	—	—	Same as 1V								6Z3
6Z4, 6Z4/84	D	6X5GT	5D	Small-5	Htr.	6.3	0.5	— 1250	— 180	F-W Power Rectifier	325 450	Capacitor input to filter Choke input to filter					60 60	6Z4, 6Z4/84
6Z5/12Z5	D		6K	Small-6	Htr.	6.3	0.8	—	—	F-W Power Rectifier	230	Capacitor input to filter					60	6Z5/12Z5

*S=Single diode. D=Duodiode. T=Triple diode. Q=Quadruple diode.

TABLE I.(continued) Diodes

TYPE	DESCRIPTION			CONSTRUCTION			CATHODE			MAX. RATINGS		SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION						TYPE
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	PEAK INVERSE VOLTS	PEAK PLATE MA	APPLICATION	PLATE SUPPLY VOLTS, RMS (EACH PLATE)		MIN PLATE SUPPLY IMPEDANCE, Ω	INPUT CAPACITOR, μ F	MIN. INPUT CHOKE, H	VOLTAGE DROP EACH SECTION (V. at MA.)	OUTPUT VOLTAGE AT FILTER INPUT	D-C OUTPUT, MA	
6ZY5G	D	6Y5/V	6S	Octal	Htr.	6.3	0.3	1250	120	F-W Power Rectifier	325 450	225 —	Capacitor input to filter — 13.5		—	40 40	6ZY5G		
7A6	D	6H6GT	7AJ	Loctal	Htr.	6.3	0.15	420	48	Detector & H-W Rectifier	117 150	15 40	— —	11 at 16 11 at 16	— —	8 8	7A6		
7C4	S	9006	4AH	Loctal	Htr.	6.3	0.15	—	—	Detector & H-W Rectifier	117	Resonant Frequency = 900 Mc				—	5	7C4	
7X6	D		7AJ	Loctal	Htr.	6.3	1.2	700	450	H-W Rectifier Doubler	235 H-W117 F-W117	100 30 15	16 16 16	— — —	— 22 at 150	— — —	75 75 75	7X6	
7Y4	D	6X5GT	5AB	Loctal	Htr.	6.3	0.5	1250	210	F-W Power Rectifier	325 450	150 —	40 —	— 10	22 at 70 22 at 70	— —	70 70	7Y4	
7Z4	D	6X5GT	5AB	Loctal	Htr.	6.3	0.9	1250	300	F-W Power Rectifier	325 450	75 —	40 —	— 6	40 at 100 40 at 100	— —	100 100	7Z4	
12H6	D	12AL5	7Q	Octal	Htr.	12.6	0.15	150	—	Detector & H-W Rectifier	150	15	—	—	—	—	8	12H6	

12Z3	S		4G	Small-4	Htr.	12.6	0.3	700	330	H-W Power Rectifier	117 150 235	0 30 75	Capacitor input to filter					55 55 55	12Z3
12Z5	D		6K	Octal	Htr.	12.6	0.3	—	—	Same as 6Z5/12Z5									12Z5
13	D		4C	Medium-4	Htr.	5.0	2.0	1400	440	F-W Power Rectifier	350 500	50 —	20 —	— 10	50 at 125 50 at 125	360 380	125 125	13	
14Y4	D		5AB	Loctal	Htr.	12.6	0.3	—	—	Same as 7Y4									14Y4
14Z3	S		4G	Small-4	Htr.	12.6	0.3	—	—	—	250	—	—	—	—	—	60	14Z3	
16, 16B	S	81	4B	Small-4	Htr.	7.5	1.25	2000	500	H-W Power Rectifier	700	—	—	—	—	—	85	16, 16B	
25Y5	D	25Z5 25Z6GT	6E	Small-6	Htr.	25.0	0.3	700	—	H-W Rectifier Doubler	235	—	—	—	—	—	75	25Y5	
25Z5	D	25Z6	6E	Small-6	Htr.	25.0	0.3	700	450	H-W Rectifier Doubler	235 H-W 117 F-W 117	100 30 15	16 16 16	— — —	22 at 150 — —	— — —	75 75 75	25Z5	
28Z5	D		6BJ	Loctal	Htr.	28.0	0.24	—	—	F-W Power Rectifier	325 450	Capacitor input to filter					100 100	28Z5	
											Choke input to filter					—			
35Y4	S	35Z5GT 40Z5/45Z5GT	5AL	Loctal	Htr.	35.0	0.15	700	600	H-W Power Rectifier	235 235 117	100 100 15	40 40 40	With panel lamp		— 235 120	60 100 100	35Y4	
														18 at 200					
35Z3	S	35W4, 35Y4 35Z4, 35Z5GT	4Z	Loctal	Htr.	35.0	0.15	700	600	H-W Power Rectifier	117 235	15 100	40 40	— —	— 18 at 200	120 235	100 100	35Z3	

*S=Single diode. D=Duodiode. T=Triple diode.

TABLE I. (continued) Diodes

DESCRIPTION		CONSTRUCTION		CATHODE		MAX. RATINGS		SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION									
TYPE	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	PEAK INVERSE VOLTS	PEAK PLATE MA	APPLICATION	PLATE SUPPLY VOLTS, RMS (EACH PLATE)	MIN PLATE-SUPPLY IMPEDANCE, Ω	INPUT CAPACITOR, μF	MIN. INPUT CHOKE, H	VOLTAGE DROP EACH SECTION (V. at MA.)	OUTPUT VOLTAGE AT FILTER INPUT	D-C OUTPUT, MA	TYPE	
35Z6GT	D		7Q	Octal	Htr.	35.0	0.3	—	—	H-W Rectifier Doubler	117 235	—	—	—	—	—	110 110	35Z6GT	
40Z5/45Z5GT	S	35Z5GT	6AD	Octal	Htr.	45.0	0.15	—			Same as 35Y4							40Z5/45Z5GT	
45Z3	S		5AM	Min.-7	Htr.	45.0	0.075	350	390	H-W Rectifier	117	15	40	—	23 at 130	—	65	45Z3	
50AX6G	D		7Q	Octal	Htr.	50.0	0.3	1250 2000	600 600	F-W Rectifier Damper	350 —	145 —	40 —	—	21 at 250 —	—	250 —	50AX6G	
50X6	D	50Y7GT 50Z7GT	7AJ	Loctal	Htr.	50.0	0.15	700	450	H-W Rectifier Doubler	235 H-W 117 F-W 117	100 30 15	16 16 16	— — —	— 22 at 150 —	— — —	75 75 75	50X6	
50Y6GT	D	50Z7GT	7Q	Octal	Htr.	50.0	0.15	700	450	H-W Rectifier Doubler	235 H-W 117 F-W 117	100 30 15	40 40 40	— — —	— 22 at 150 —	— — —	75 75 75	50Y6GT	
50Y7GT	D	50Y6GT	8AN	Octal	Htr.	50.0	0.15	235 117	450 450	H-W Rectifier Doubler	150 235 117	40 100 15	40 40 40	— — —	22 at 150 — —	— — —	65 65 65	50Y7GT	
													Lamp shunt = 250 Ω						

50Z7GT	D	50Y6GT	8AN	Octal	Htr.	50.0	0.15	—	—	H-W Rectifier Doubler	235 117	100 15	40 40	—	22 at 150 Lamp shunt = 250 Ω	—	65 65	50Z7GT
80	D	5Y3GT	4C	Medium-4	Fil.	5.0	2.0	1400	400	F-W Rectifier	350 500	50 —	10 —	— 10	60 at 125 60 at 125	350 390	125 125	80
81	S		4B	Medium-4	Fil.	7.5	1.25	2000	500	H-W Rectifier	700	—	4	20	—	—	85	81
82/82V	D		4C	Medium-4	Fil.	2.5	3.0	1550	600	F-W Mercury Rectifier	450 550	50 —	40 —	— 6	15 at 115 —	— —	115 115	82/82V
84/6Z4	D		5D	Small-5	Htr.	6.3	0.5	1250	180	F-W Power Rectifier	325 450	65 —	40 —	— 10	20 at 60 —	— —	60 60	846/Z4
88	D		4C	Medium-4	Fil.	5.0	2.0	—	—	F-W Power Rectifier	450	—	—	—	—	—	125	88
96	S		4G	Small-4	Htr.	10.0	0.5	—	—	H-W Power Rectifier	350	—	—	—	—	—	100	96
117Z4GT	S	117Z6GT	5AA	Octal	Htr.	117.0	0.04	350	540	H-W Rectifier	117	30	C input	—	22 at 180	—	90	117Z4GT
5642	S		5642	Submin.-2	Fil.	1.25	0.2	10,000	12	TV High V. Rectifier	3600	—	—	—	—	—	2	5642
9006	S		6BH	Min.-7	Htr.	6.3	0.15	750	15	UHF Detector	270	100	—	—	—	—	5	9006

*S=Single diode. D=Duodiode. T=Triple diode.

TABLE II.



DETECTOR AMPLIFIERS (Diode and Triode, Tetrode, or Pentode Combined)

TYPE	DESCRIPTION			CONSTR.		CATHODE		MAX RATINGS		SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION								
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	PLATE RESISTANCE	TRANSCONDUCTANCE μ -MHOS	AMP. FACTOR	PLATE MA	SCREEN MA	DIODE MA AT APPLIED VOLTS	TYPE
1AF5	D+P	1S5	6AU	Min.-7	Fil.	1.4	0.025	110	110	A-F Class A	67.5 90	67.5 90	0 0	230K 200K	550 600	— —	0.7 1.1	0.25 0.4	0.7 at 10 0.7 at 10	1AF5
1B5/25S	D+D+T	1H6GT	6M	Small-6	Fil.	2.0	0.06	—	—	A-F Class A	135	—	-3.0	35K	575	20	0.8	—	—	1B5/25S
1B8GT	D+T+P	1D8GT	8AJ	Octal	Fil.	1.4	0.10	—	—	Triode Class A Pentode Class A	90 90	— 90	0 -6.0	240K $R_L=14K$	275 1150	— $P_o=21W$	0.15 6.3	— 1.4	— —	1B8GT
1D8GT	D+T+P	1B8GT	8AJ	Octal	Fil.	1.4	0.10	—	—	Triode Class A Pentode Class A	90 90	— 90	0 -9.0	43.5K 200K	575 925	25 —	1.1 5.0	— 1.0	— —	1D8GT
1F6	D+D+P	1F7G	6W	Small-6	Fil.	2.0	0.06	—	—	R-F Class A A-F Class A	180 135	67.5 135	-1.5 -1.0	1000K 250K	650 $R_{ez}=1.0$ meg	650 VG=48	2.0 .42	0.6 —	— —	1F6
1F7G, H, V	D+D+P	1F6	7AD 7AF	Octal	Fil.	2.0	0.06	Same as 1F6											1F7G, H, V	
1H5GT	D+T	1LH4	5Z	Octal	Fil.	1.4	0.05	110	—	A-F Class A	90	$R_g=1.0$ meg	0	240K	275	65	0.15	—	0.5 at 10	1H5GT

1H6G, GT	D+D+T	1B5/25S	7AA	Octal	Fil.	2.0	0.06	—	—	A-F Class A	135	—	-3	35K	575	20	0.8	—	—	1H6G, GT
1LD5	D+P		6AX	Loctal	Fil.	1.4	0.05	110	50	A-F Class A	45 90	45 45	0 0	900K 450K	550 575	—	0.55 0.6	0.12 0.1	0.5 at 10 0.5 at 10	1LD5
1LH4	D+T	1H5GT	5AG	Loctal	Fil.	2.0	0.06	Same as 1H5GT												1LH4
1N6G	D+P		7AM	Octal	Fil.	1.4	0.05	—	—	Power Class A	90	90	-4.5	R _L =25K	800	P _o =.1W	3.1	0.6	—	1N6G
1Q6	D+P		8CO	Sub-min.-8	Fil.	1.25	0.04	—	—	A-F Class A	30 67.5	30 67.5	0 0	500K 400K	330 600	—	0.33 1.6	0.09 0.4	—	1Q6
1SB6GT	D+P	1LD5	6BE	Octal	Fil.	1.4	0.05	—	—	A-F Class A	45 90	45 67.5	0 0	900K 700K	500 665	—	0.6 1.45	0.16 0.38	—	1SB6GT
2A6	D+D+T		6G	Small-6	Htr.	2.5	0.8	250	—	A-F Class A	250	—	-2.0	91K	1100	100	0.9	—	0.8 at 10	2A6
2B7, S	D+D+P		7D	Small-7	Htr. Htr.	2.5 2.5	0.8 0.8	300	125	A-F Class A	250 250	125 100	-3.0 -3.0	650K 800K	1125 1000	730 800	9.0 6.0	2.3 1.5	0.8 at 10	2B7, S
3A8GT	D+T+P		8AS	Octal	Htr.	1.4 2.8	0.1 .05	110 110	— 110	Triode Class A Pentode Class A	90 90	— 90	0 0	200K 800K	325 750	65 —	0.2 1.5	— 0.5	0.5 at 10 —	3A8GT
6AQ7GT	D+D+T		8CK	Octal	Htr.	6.3	0.5	250	—	A-F Class A	250	—	-2	44K	1600	70	2.3	—	—	6AQ7GT
6B6G	D+D+T	6Q7GT	7V	Octal	Htr.	6.3	0.3	Same as 2A6												6B6G
6B7	D+D+P	6B8GT	7D	Small-7	Htr.	6.3	0.30	300	125	A-F Class A	100 250	100 125	-3.0 -3.0	300K 600K	950 1125	—	5.8 9.0	1.7 2.3	0.8 at 10 —	6B7

★Class Code:

D+P=Diode-pentode.

D+T+P=Diode-triode-pentode.

D+T=Diode-triode.

D+D+T=Duodiode-triode.

D+D+P=Duodiode-pentode.

T+P=Triode-pentode.

TABLE II. (continued) Detector Amplifiers

TYPE	DESCRIPTION			CONSTR.	CATHODE			MAX. RATINGS	SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION										
	CLASS*	NEAREST EQUIVALENT	BASING		BASE & PINS	HTR./FIL.	VOLTS			AMPERES	PLATE VOLTS	SCREEN VOLTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	PLATE RESISTANCE	TRANSCONDUCTANCE μmhos	AMP. FACTOR	PLATE MA
6B8, G, GT	D+D+P	6B7	8E	Octal	Htr.	6.3	0.30	300 300	125 —	A-F Class A	250 250	125 125	—3.0 —3.0	600K 600K	1125 1325	— —	9.0 10.0	2.3 2.3	0.8 at 10 —	6B8, G, GT
6BD7	D+D+T		9Z	Min.-9	Htr.	6.3	0.23	—	—	A-F Class A	250	—	—3.0	58K	1200	70	1.0	—	—	6BD7
6BK6	D+D+T		7BT	Min.-7	Htr.	6.3	0.3	300	—	A-F Class A	100 250	— —	—1.0 —2.0	80K 62.5K	1250 1600	100 100	0.5 1.2	— —	— —	6BK6
6C7	D+D+T	6SR7GT	7G	Small-7	Htr.	6.3	0.3	—	—	A-F Class A	250	—	—9.0	16K	—	20	4.5	—	—	6C7
6F7, S	T+P	6P7G	7E	Small-7	Htr.	6.3	0.3	—	—	Triode Class A Pentode Class A	100 250	— 100	—3.0 —3.0	16K 850K	500 1100	8.5 900	3.5 6.5	— 1.5	— —	6F7, S
6P7G	T+P	6F7	7U	Octal	Htr.	6.3	0.3	Same as 6F7										6P7G		
6Q6, G	D+T		6Y	Octal	Htr.	6.3	0.15	—	—	A-F Class A	250	—	—3.0	61K	1050	65	1.2	—	—	6Q6, G
6Q7, G, GT	D+D+T		7V	Octal	Htr.	6.3	0.3	300	—	A-F Class A	100 250	— —	—1.0 —3.0	58K 58K	1200 1200	70 70	0.8 1.0	— —	0.8 at 10	6Q7, G, GT

6R7, G, GT	D+D+T	6SR7GT	7V	Octal	Htr.	6.3	0.3	250	—	A-F Class A	250	—	—9.0	8.5K	1900	16	9.5	—	—	6R7, G, GT
6R8	D+D+D+T		9E	Min.-9	Htr.	6.3	0.45	250	— R _{gr} = 1 meg	A-F Class A	250	—	—9.0	8.5K	1900	16	9.5	R _a = 10000Ω	—	6R8
6SF7	D+P	6SV7	7AZ	Octal	Htr.	6.3	0.3	300	100	A-F Class A	100 250	100 100	—1.0 —1.0	200K 700K	1975 2050	— —	12.0 12.4	3.4 3.3	— —	6SF7
6SR7GT	D+D+T	6R7GT	8Q	Octal	Htr.	6.3	0.3	250	—	A-F Class A	250	—	—9.0	8.5K	1900	16	9.5	—	—	6SR7GT
6ST7	D+D+T	6T7G	8Q	Octal	Htr.	6.3	0.15	Same as 6SR7GT												6ST7
6SV7	D+P		7AZ	Octal	Htr.	6.3	0.3	300	150	A-F Class A	100 250	100 150	—1.0 —1.0	700K 1500K	2600 3600	— —	3.7 7.5	1.4 2.8	15 at 10 15 at 10	6SV7
6SZ7	D+D+T	6SQ7GT	8Q	Octal	Htr.	6.3	0.15	—	—	A-F Class A	100 250	— —	—1.0 —3.0	61K 58K	1150 1200	70 70	0.8 1.0	— —	— —	6SZ7
6T6	D+D+T		6Z	Octal	Htr.	6.3	0.45	—	—	A-F Class A	250	100	—1.0	1000K	5500	—	10.0	2.0	—	6T6
6T7G/6Q6G	D+D+T	6ST7	7V	Octal	Htr.	6.3	0.15	—	—	A-F Class A	100 250	— —	—1.5 —3.0	95K 62K	680 1050	65 65	0.3 1.2	— —	— —	6T7G/6Q6G
6V7G	D+D+T	85	7V	Octal	Htr.	6.3	0.3	—	—	A-F Class A	135 180 250	— — —	—10.5 —13.5 —20.0	11K 8.5K 7.5K	750 975 1100	8.3 8.3 8.3	3.7 6.0 8.0	— — —	— — —	6V7G

★Class Code:

D+P=Diode-pentode.

D+T+P=Diode-triode-pentode.

D+T=Diode-triode.

D+D+T=Duodiode-triode.

D+D+P=Duodiode-pentode.

T+P=Triode-pentode.

TABLE II. (continued) Detector Amplifiers

TYPE	DESCRIPTION			CONSTR.	CATHODE			MAX. RATINGS	SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION										TYPE
	CLASS*	NEAREST EQUIVALENT	BASING		BASE & PINS	HTR./FIL.	VOLTS			AMPERES	PLATE VOLTS	SCREEN VOLTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	PLATE RESISTANCE	TRANSCONDUCTANCE μmhos	AMP. FACTOR	
6V8	D+D+D+T		9AH	Min.-9	Htr.	6.3	0.45	300	—	A-F Class A	100 250	— —	-1.0 -3.0	54K 58K	1300 1200	70 70	0.8 1.0	— —	D ₂ & D ₃ 40 at 5 D ₁ 2 at 10	6V8
7B6	D+D+T	6B6G 6Q7GT	8W	Loctal	Htr.	6.3	0.3	300	—	A-F Class A	100 250	— —	-1.0 -2.0	110K 91K	900 1100	100 100	0.4 0.9	— —	2 at 10 —	7B6
7C6	D+D+T		8W	Loctal	Htr.	6.3	0.15	300	—	A-F Class A	100 250	— —	0 -1.0	100K 100K	850 1000	85 100	1.0 1.3	— —	2 at 10	7C6
7E6	D+D+T		8W	Loctal	Htr.	6.3	0.3	300	—	A-F Class A	100 250	— —	-3.0 -9.0	11K 8.5K	1500 1900	16.5 16.0	3.9 9.5	— —	0.8 at 10	7E6
7E7	D+D+P		8AE	Loctal	Htr.	6.3	0.3	300	100	R-F Class A	100 250	100 100	-1.0 -3.0	150K 700K	1600 1300	— —	10.0 7.5	2.7 1.6	— —	7E7
7K7	D+D+T		8BF	Loctal	Htr.	6.3	0.3	300	—	A-F Class A	250	—	-2.0	44K	1600	70	2.3	—	—	7K7
7R7	D+D+P		8AE	Loctal	Htr.	6.3	0.3	250	—	A-F Class A	100 250	100 100	-1.0 -1.0	350K 1000K	3000 3200	— —	5.5 5.7	2.2 2.1	2 at 10 —	7R7

7X7	D+D+T		8BZ	Loctal	Htr.	6.3	0.3	300	—	FM Detector A-F Class A	100 250	—	0 -1.0	85K 67K	1000 1500	85 100	1.2 1.9	—	1 at 5 —	7X7	
12B8GT	T+P		8T	Octal	Htr.	12.6	0.3	—	—	Triode Class A Pentode Class A	90 90	— 90	0 -3.0	37K 200K	2400 1800	90 —	2.8 7.0	— 2.0	—	12B8GT	
12C8	D+D+P		8E	Octal	Htr.	12.6	0.15	Same as 6B8												12C8	
12Q7, G, GT	D+D+T	14B6	7V	Octal	Htr.	12.6	0.15	Same as 6Q7 • 6Q7G • 6Q7GT												12Q7, G, GT	
12S8	D+D+D+T		8CB	Octal	Htr.	12.6	0.15	300	—	A-F Class A	100 250	— —	-1.0 -2.0	110K 91K	900 1100	100 100	0.4 0.9	— —	2.5 at 10 —	12S8	
12SF7	D+P		7AZ	Octal	Htr.	12.6	0.015	—	Same as 6SF7												12SF7
12SR7	D+D+T		8Q	Octal	Htr.	12.6	0.15	—	Same as 6SR7GT												12SR7
14B6	D+D+T	12Q7GT	8W	Loctal	Htr.	12.6	0.15	—	Same as 7B6												14B6
14E6	D+D+T		8W	Loctal	Htr.	12.6	0.15	—	Same as 7E6												14E6
14E7	D+D+P		8AE	Loctal	Htr.	12.6	0.15	—	Same as 7E7												14E7
14R7	D+D+P		8AE	Loctal	Htr.	12.6	0.15	—	Same as 7R7												14R7
14X7	D+D+T		8BZ	Loctal	Htr.	12.6	0.15	—	Same as 7X7												14X7
19C8	D+D+D+T		9E	Min.-9	Htr.	18.9	0.15	—	—	A-F Class A	100	—	-1.0	80K	1250	100	0.5	—	—	19C8	

★Class Code:

D+P=Diode-pentode.

D+T+P=Diode-triode-pentode.

D+T=Diode-triode.

D+D+T=Duodiode-triode.

D+D+P=Duodiode-pentode.

T+P=Triode-pentode.

TABLE II. (continued) Detector Amplifiers

TYPE	DESCRIPTION		CONST.		CATHODE		MAX. RATINGS		SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION									
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	PLATE RESISTANCE	TRANSCONDUCTANCE μmhos	AMP. FACTOR	PLATE MA	SCREEN MA	DIODE MA AT APPLIED VOLTS	TYPE
19V8	D+D+D+T	9AH	Min.-9	Htr.	18.9	0.15	—	—	A-F Class A	100 250	—	—1.0 —3.0	54K 58K	1300 1200	70 70	0.8 1.0	—	—	—	19V8
25	D+D+T	6M	Small-6	Fil.	2.0	0.06	—	—	Same as 1B5/25S										25	
25B8	T+P	8T	Octal	Htr.	25.0	0.15	—	—	Triode Class A Pentode Class A	100 100	— 100	—1.0 —3.0	75K 185K	1500 2000	112.5 370	0.6 7.6	— 2.0	— —	—	25B8
25D8GT	D+T+P	8AF	Octal	Htr.	25.0	0.15	—	—	R-F Class A	100 100	— 100	—1.0 —3.0	91K 200K	1100 1900	100 —	0.5 8.5	— 2.7	— —	—	25D8GT
26C6	D+D+T	7BT	Min.-7	Htr.	26.5	0.07	—	—	Same as 7E6										26C6	
55, S	D+D+T	6G	Small-6	Htr.	2.5	1.0	—	—	Same as 6V7G										55, S	
75	D+D+T	6G	Small-6	Htr.	6.3	0.3	—	—	Same as 2A6										75	
85	D+D+T	6G	Small-6	Htr.	6.3	0.3	—	—	Same as 6V7G										85	

85AS	D+D+T	6G	Small-6	Htr.	6.3	0.3	—	—	A-F Class A	250	—	—9.0	16K	1250	20	4.5	—	—	85AS
-------------	-------	----	---------	------	-----	-----	---	---	-------------	-----	---	------	-----	------	----	-----	---	---	-------------

★Class Code:

D+P = Diode-pentode.

D+T+P = Diode-triode-pentode.

D+T = Diode-triode.

D+D+T = Duodiode-triode.

D+D+P = Duodiode-pentode.

T+P = Triode-pentode.

TABLE III.



TRIODES—GENERAL PURPOSE (Single and Double Triodes)

TYPE	DESCRIPTION		CONSTRUCTION		CATHODE		MAX. RATINGS		SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION							
	CLASS*	NEAREST EQUIVALENT	BASING	BASE	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	PLATE WATTS	APPLICATION	PLATE VOLTS	GRID VOLTS	PLATE RESISTANCE	TRANSCONDUCTANCE μmhos	AMP. FACTOR (μ)	PLATE MA	TYPE
00			4D	Medium-4	Fil.	5.0	1.0	—	—	Detector	45	—	30K	660	20	1.5	00
00A	01A		4D	Medium-4	Fil.	5.0	0.25	—	—	Detector	45	0	30K	660	20	1.5	00A
01	S		4D	Medium-4	Fil.	5.0	1.0	—	—	Detector Class A Amp.	90	-4.5	11K	725	8	2.5	01
01A	S	00A 01B	4D	Medium-4	Fil.	5.0	0.25	—	—	Detector Class A Amp.	90	-4.5	11K	725	8	2.5	01A
01AA	S	01A	4D	Medium-4	Fil.	5.0	0.25	—	—	Detector Class A Amp.	90	-4.5	94K	850	8	3.2	01AA
01B	S	01A	4D	Medium-4	Fil.	5.0	.125	—	—	Detector Class A Amp.	90	-4.5	11K	725	8	2.5	01B
1E4G	S	1E5GP 1E5GT	5S	Octal	Fil.	1.4	0.05	110	—	Detector Class A Amp.	90 90	0 -3	11K 19K	1300 760	14.5 14.5	4.5 1.4	1E4G
1G4G, GT	S		5S	Octal	Fil.	1.4	0.05	110	—	Detector Class A Amp.	90	-6.0	10K	825	8.8	2.3	1G4G, GT

1H4G, GT	D		5S	Octal	Fil.	2.0	0.06	—	—	Class A Amplifier*	90 135 180	—4.5 —9.0 —13.5	11K 10K 10.3K	850 900 900	9.3 9.3 9.3	2.5 3.0 3.1	1H4G, GT
1LE3	S		4AA	Loctal	Fil.	1.4	0.05	Same as 1E4G								1LE3	
1LF3	S		4AA	Loctal	Fil.	1.4	0.05	Same as 1E4G								1LF3	
3A5	D		7BC	Min.-7	Fil.	1.4 2.8	0.27 0.11	135	0.5	Class A Amp.*	90	—2.5	8.3K	1800	15	3.7	3A5
3C6	D	3B7/1291	7BW	Loctal	Fil.	1.4 2.8	0.10 0.05	—	—	Detector Amplifier*	90 90	0 0	11K 12K	1300 1300	14.5 14.1	4.5 3.2	3C6
6AD5G, GT	S	6F5GT	6Q	Octal	Htr.	6.3	0.3	—	—	Class A Amp.	250	—2.0	66K	1500	100	0.9	6AD5G, GT
6AE5GT	S	6AF5G	6Q	Octal	Htr.	6.3	0.3	300	2.5	Class A Amp.	95	—15.0	3.5K	1200	4.2	7.0	6AE5GT
6AE6G	D		7AH	Octal	Htr.	6.3	0.15	—	—	Remote Cutoff Class A Amp.* Sharp Cutoff Class A Amp.*	250 250 250 250	—1.5 —35.0 —1.5 —9.5	25K — 35K —	1000 — 950 —	25.0 — 33.0 —	6.5 0.01 4.5 0.01	6AE6G
6AE7G, GT	D		7AX	Octal	Htr.	6.3	0.50	—	—	Twin-input Driver*	250	—13.5	9.3K	1500	14	5.0	6AE7G, GT
6AF5G	S		6Q	Octal	Htr.	6.3	0.3	—	—	Class A Amp.	180	—18.0	4.9K	1500	7.4	7.0	6AF5G
6AH7GT	D		8BE	Octal	Htr.	6.3	0.3	180	1.5	Class A Amp.	100 180	—3.6 —6.5	10.3K 8.4K	1550 1900	16 16	3.7 7.6	6AH7GT
6AJ4	S	6AM4	9BX	Min.-7	Htr.	6.3	0.225	—	—	UHF Amplifier	125	68†	4.2K	10000	42	16	6AJ4

†Self bias cathode resistor. ‡Conversion Transconductance. *Each unit. ★Class Code: S=Single triode. D=Duotriode.

TABLE III. (continued) Triodes—General Purpose

		DESCRIPTION			CONSTRUCTION		CATHODE			MAX. RATINGS		SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION					
TYPE	CLASS*	NEAREST EQUIVALENT	BASING	BASE	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	PLATE WATTS	APPLICATION	PLATE VOLTS	GRID VOLTS	PLATE RESISTANCE	TRANSCONDUCTANCE μmhos	AMP. FACTOR (μ)	PLATE MA	TYPE		
																		6AM4	7DK
6AN4	S	6AM4	7DK	Min.-7	Htr.	6.3	0.225	300	4	UHF Class A UHF Mixer	200 125	100† 270†	— $E_{osc}=1.4$	10000 2900‡	70 —	13.0 7.0	6AN4		
6AS7G	D		8BD	Octal	Htr.	6.3	2.5	250	13.0*	D-C Amp.*	135	250†	280	7000	2.0	125	6AS7G		
6BF7	D	6BG7	8DG	Submin.-8	Htr.	6.3	0.3	300	1.0*	Class A Amp.* Mixer	100 150	50† 820†	7.1K 10K	5300 1900‡	38 $E_{osc}=2.1$	8.5 4.8	6BF7		
6BG7	D	6BF7	8DG	Submin.-8	Htr.	6.3	0.3	—	—	Same as 6BF7						6BG7			
6C8G	D		8G	Octal	Htr.	6.3	0.3	—	—	Class A Amp.*	250	—4.5	22.5K	1600	36	3.2	6C8G		
6F4	S		7BR	Acorn	Htr.	6.3	0.225	—	—	Class A Amp.	80	150†	2.9K	5800	17.0	13.0	6F4		
6F5, G, GT	S	6SF5GT	5M	Octal	Htr.	6.3	0.3	300	—	Class A Amp.	100 250	—1.0 —2.0	85K 85K	1150 1500	100 100	0.4 0.9	6F5, G, GT		
6F8G	D	6SN7GT	8G	Octal	Htr.	6.3	0.6	300	2.5*	Class A Amp.*	90 250	0 —8.0	6.7K 7.7K	3000 2600	20 20	10.0 9.0	6F8G		

6J4	S		7BQ	Min.-7	Htr.	6.3	0.4	150	2.25	UHF Amplifier	100 150	100† 100†	— —	11000 12000	55 55	10.0 15.0	6J4
6K4	S		6K4	Submin.-5	Htr.	6.3	0.15	—	—	R-F Amplifier	200	—8.0	4650	3450	16	11.5	6K4
6K5G, GT	S	6F5GT	5U	Octal	Htr.	6.3	0.3	—	—	Class A Amp.	250	—3.0	50K	1400	70	1.10	6K5G, GT
6L5G	S		6Q	Octal	Htr.	6.3	0.15	250	—	Class A Amp.	135 250	—5.0 —9.0	11.3K 9K	1500 1900	17 17	3.5 8.0	6L5G
6N4	S	6C4	7CA	Min.-7	Htr.	6.3	0.2	180	3.0	UHF Amplifier	180	—3.5	5.4K	6000	32	12.0	6N4
6P5GT	S		6Q	Octal	Htr.	6.3	0.3	250	1.25	Class A Amp.	100 250	—5.0 —13.5	2K 9.5K	1150 1450	13.8 13.8	2.5 5.0	6P5GT
6Q4	S		9S	Min.-9	Htr.	6.3	0.48	—	—	R-F Amplifier	250	—1.0	—	12000	80	15	6Q4
6SF5, GT	S	6F5GT	6AB	Octal	Htr.	6.3	0.3	300	—	Class A Amp.	250	—2.0	66K	1500	100	0.9	6SF5, GT
6SU7GT	D	6SL7GT	8BD	Octal	Htr.	6.3	0.3	—	—	Class A Amp.*	250	—2.0	44K	1600	70	2.3	6SU7GT
7A4	S	7N7	5AC	Loctal	Htr.	6.3	0.3	—	—	Class A Amp.*	90 250	0 —8.0	6.7K 7.7K	3000 2600	20 20	10.0 9.0	7A4
7AF7	D		8AC	Loctal	Htr.	6.3	0.3	300	2.5*	Class A Amp.*	100 100 250	0 —3.0 —10.0	6.5K 8.4K 7.6K	2600 1900 2100	17 16 16	10.8 5.0 9.0	7AF7
7B4	S		5AC	Loctal	Htr.	6.3	0.3	Same as 6SF5								7B4	
7E5	S		8BN	Loctal	Htr.	6.3	0.15	250	4.0	Class A Amp.	180	—3.0	12K	3000	36	5.5	7E5

†Self bias cathode resistor. ‡Conversion Transconductance. *Each unit. *Class Code: S=Single triode. D=Duotriode.

TABLE III. (continued) Triodes—General Purpose

TYPE	DESCRIPTION				CONSTRUCTION		CATHODE		MAX. RATINGS		SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION					
	CLASS*	NEAREST EQUIVALENT	BASING	BASE	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	PLATE WATTS	APPLICATION	PLATE VOLTS	GRID VOLTS	PLATE RESISTANCE	TRANSCONDUCTANCE μmhos	AMP. FACTOR (μ)	PLATE MA	TYPE
7F7	D	6SL7	8AC	Loctal	Htr.	6.3	0.3	300	1.0*	Class A Amp.*	100 250	-1.0 -2.0	62K 44K	1125 1600	70 70	0.65 2.3	7F7
7F8	D		8BW	Loctal	Htr.	6.3	0.3	300	1.75*	Class A Amp.*	250	500†	—	3300	48	6.0	7F8
7N7	D	6SN7GT	8AC	Loctal	Htr.	6.3	0.6	300	2.5*	Class A Amp.*	90 250	0 -8.0	6.7K 7.7K	3000 2600	20 20	10.0 9.0	7N7
11	S		4F	Medium-4	Fil.	1.1	0.25	—	—	Detector Class A Amp.	90 135	-4.5 -10.5	15.5K 15K	425 440	6.6 6.6	2.5 3.0	11
12	S		4D	Medium-4	Fil.	1.1	0.25	Same as 11								12	
12AH7GT	D		8BE	Octal	Htr.	12.6	0.15	Same as 6AH7GT								12AH7GT	
12AY7	D		9A	Min.-9	Htr.	12.6 6.3	0.15 0.3	300 —	1.5* —	Low Noise Class A Amp.*	250 150	-4.0 2700†	— $R_L=20K$	1750 $C_k=40\mu\text{f}$	40 $R_g=100K$	3.0 $V_G=12.5$	12AY7
12F5GT	S	12SF5GT	5M	Octal	Htr.	12.6	0.15	Same as 6F5								12F5GT	

12G4	S	12H4	6BG	Min.-7	Htr.	12.6	0.15	300	2.5	Class A Amp.	90 250	0 -8.0	— —	3000 2600	20.0 20.0	10.0 9.0	12G4
12H4	S	12AU7	7DW	Min.-7	Htr.	12.6 6.3	0.15 0.3	300 —	2.5 —	Class A Amp.	90 250	0 -8.0	— —	3000 2600	20.0 20.0	10.0 9.0	12H4
12SC7	D		8S	Octal	Htr.	12.6	0.15	250	—	Class A Amp.	250	-2.0	53K	1325	70	2.0	12SC7
12SF5, GT	S		6AB	Octal	Htr.	12.6	0.15	Same as 6SF5 • 6SF5GT								12SF5, GT	
12SL7GT	D		8BD	Octal	Htr.	12.6	0.15	300	1.0*	Class A Amp.*	250	-2.0	44K	1600	70.0	2.3	12SL7GT
14A4	S	14N7	5AC	Loctal	Htr.	12.6	0.15	Same as 7A4								14A4	
14AF7	D		8AC	Loctal	Htr.	12.6	0.15	Same as 7AF7								14AF7	
14F7	D	12SL7	8AC	Loctal	Htr.	12.6	0.15	Same as 7F7								14F7	
14F8	D		8BW	Loctal	Htr.	12.6	0.15	Same as 7F8								14F8	
14N7	D	12SN7GT	8AC	Loctal	Htr.	12.6	0.30	Same as 7N7								14N7	
26	S		4D	Octal	Fil.	1.5	1.05	180	—	R-F Amplifier Class A	90 135 180	-7.0 -10.0 -14.5	8.9K 7.6K 7.3K	935 1100 1150	8.3 8.3 8.3	2.9 5.5 6.2	26
27	S	37, 76	5A	Octal	Htr.	2.5	1.75	275	—	Detector Class A Amp.	90 135 180	-6.0 -9.0 -13.5	11K 9K 9K	820 1000 1000	9 9 9	2.7 4.5 5.0	27

†Self bias cathode resistor. ‡Conversion Transconductance. *Each unit. ★Class Code: S=Single triode. D=Duotriode.

TABLE III. (continued) Triodes—General Purpose

DESCRIPTION		CONSTRUCTION		CATHODE		MAX. RATINGS		SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION										
TYPE	CLASS*	NEAREST EQUIVALENT	BASING	BASE	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	PLATE WATTS	APPLICATION	PLATE VOLTS	GRID VOLTS	PLATE RESISTANCE	TRANSCONDUCTANCE μmhos	AMP. FACTOR (μ_r)	PLATE MA	TYPE			
30	S	1H4GT	4D	Octal	Fil.	2.0	0.06	180	—	Detector Class A Amp.	90 135 180	—4.5 —9.0 —13.5	11K 10.3K 10.3K	850 900 900	9.3 9.3 9.3	2.5 3.0 3.1	30			
37	S	76, 27	5A	Octal	Htr.	6.3	0.3	250	—	Detector Class A Amp.	90 135 180	—6.0 —9.0 —13.5	11.5K 10K 10.2K	800 925 900	9.2 9.2 9.2	2.5 4.1 4.3	37			
40	S		4D	Octal	Fil.	5.0	0.25	—	—	Class A Amp.	135 180	—1.5 —3.0	150K 150K	200 200	30 30	0.2 0.2	40			
56	S	27	5A	Octal	Htr.	2.5	1.0	—	—	Detector Class A Amp.	100 250 100 250	—8.0 —20.0 —5.0 —13.5	Bias for $I_b = 0.2$ ma, no signal			12K 9.5K	1150 1450	13.8 13.8	2.5 5.0	56
56AS	S	37, 76	5A	Octal	Htr.	6.3	0.40	Same as 56							56AS					
67, A	S		5A	Octal	Htr.	6.3	0.40	—	—	Detector Amp.	180	—13.5	10.2K	—	9.2	4.3	67, A			

76	S	6C5GT	5A	Octal	Htr.	6.3	0.3	250	—	Detector	100	—8.0	Bias for $I_b = 0.2$ ma, no signal				76
										Class A Amp.	250	—20.0	12K	1150	13.8	2.5	
											100	—5.0					
											250	—13.5	9.5K	1450	13.8	5.0	
401	S		4D	Octal	Htr.	3.0	1.35	—	—	Detector Class A Amp.	90	—3.0	9.5K	1000	9.5	5.0	401
484	S		5A	Octal	Htr.	2.8	1.6	—	—	Detector Class A Amp.	180	—9.0	9.3K	1350	12.5	6.0	484
9002	S		7BS	Min.-7	Htr.	6.3	0.15	250	1.6	Class A Amp.	250	—7.0	11.4K	2200	25	6.3	9002

†Self bias cathode resistor. ‡Conversion Transconductance. *Each unit. ★Class Code: S=Single triode. D=Duotriode.

TABLE IV.



VOLTAGE AMPLIFIERS (Tetrodes, Pentodes and Heptodes)

TYPE	DESCRIPTION				CONSTR.	CATHODE				MAX. RATINGS	SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION										
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS		HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS			SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID 1 VOLTS	CATHODE RES. OHMS & MISCELLANEOUS	PLATE RESISTANCE MEG. (APPROXIMATE)	TRANSCONDUCTANCE μ MMHOS	PLATE MA
1A4P	P	1D5GT 1E5GT	4M	Small-4	Fil.	2.0	0.06	180	67.5	—	—	R-F Amp. Class A	135 180	67.5 67.5	-3.0 -3.0	—	1.0 1.0	625 725	2.2 2.3	0.9 0.8	-15 -15	1A4P
1A4T	TE		4K	Small-4	Fil.	2.0	0.06	180	67.5	—	—	R-F Amp. Class A	135 180	67.5 67.5	-3.0 -3.0	—	0.35 0.6	625 650	2.2 2.2	0.7 0.7	—	1A4T
1AB5	P		5BF	Loctal	Fil.	1.2	0.13	—	—	—	—	R-F Amp.	90 150	90 150	0 -1.5	—	0.275 0.12	1100 1350	3.5 6.8	0.8 2.0	—	1AB5
1AF4	P	1U4	6AR	Min.-7	Fil.	1.4	0.025	110	90	—	—	R-F Amp. Class A	67.5 90.0	67.5 90.0	0 0	—	2.0 1.8	925 1050	1.2 1.8	0.3 0.55	-2.8 -3.8	1AF4
1B4P	P	951 1E5GT	4M	Small-4	Fil.	2.0	0.06	180	67.5	—	—	R-F Amp. Class A	90 180	67.5 67.5	-3.0 -3.0	—	1.0 1.5	600 650	1.6 1.7	0.7 0.6	-8.0 -8.0	1B4P
1B4T	TE	951 1E5GT	4K	Small-4	Fil.	2.0	0.06	—	—	—	—	R-F Amp. Class A	180	67.5	-3.0	—	1.0	650	1.75	0.4	—	1B4T
1B6	P		7AK	Min.-7	Fil.	1.4	0.05	—	—	—	—	R-F Amp. Class A	90	67.5	-1.5	—	0.8	750	1.5	0.8	—	1B6

1D5GP	P	1A4P	5Y	Octal	Fil.	2.0	0.06	Same as 1A4P												1D5GP		
1D5GT	TE	1A4T	5R	Octal	Fil.	2.0	0.06	Same as 1A4T												1D5GT		
1E5GP	P	1D5GP	5Y	Octal	Fil.	2.0	0.06	—	—	—	—	R-F Amp. Class A	135 180	67.5 67.5	—3.0 —3.0	— —	1.5 1.5	560 650	1.6 1.7	0.7 0.6	— —8.0	1E5GP
1E5G, GT	TE	1E5GP	5R	Octal	Fil.	2.0	0.06	—	—	—	—	R-F Amp. Class A	180	67.5	—3.0	—	1.2	650	1.7	0.4	—	1E5G, GT
1LC5	P		7A0	Loctal	Htr.	1.4	.05	110	45	—	—	R-F Amp. Class A	45 90	45 45	0 0	$R_{g1} = 1.0\text{meg}$ $R_{g1} = 1.0\text{meg}$.7 1.5	750 775	1.1 1.15	0.35 0.30	—3.4 —3.4	1LC5
1LG5	P		7A0	Loctal	Fil.	1.4	0.05	110	110	—	—	R-F Amp. Class A	90 90	90 45	—1.5 0	$R_{g1} = 2.0\text{meg}$ $R_{g1} = 2.0\text{meg} > 1.0$.5 >1.0	1150 800	3.7 1.7	0.9 0.4	—19 —10	1LG5
1LN5	P	1LC5 1N5GT	7A0	Loctal	Fil.	1.4	0.05	110	110	—	—	R-F Amp. Class A	90	90	0	—	1.1	800	1.6	0.35	—4.5	1LN5
1N5GT	P	1LN5	5Y	Octal	Fil.	1.4	0.05	110	110	—	—	R-F Amp. Class A	90	90	0	—	1.5	750	1.2	0.3	—3.2 —4.0	1N5GT
1P5G, GT	P	1N5GT 1T4	5Y	Octal	Fil.	1.4	0.05	110	110	—	—	R-F Amp. Class A	90	90	0	—	.8	750	2.3	0.7	—12	1P5G, GT
1SA6GT	P	1N5GT	6BD	Octal	Fil.	1.4	0.05	—	—	—	—	R-F Amp.	45 67.5 90	45 67.5 67.5	0 0 0	— — —	.7 .6 .8	750 950 970	1.1 2.4 2.45	0.3 0.7 0.68	— — —	1SA6GT
3E6	P		7CJ	Loctal	Fil.	1.4	0.1 2.8	110 110	110 110	— —	— —	R-F Amp. Class A	90 90	90 90	0 0	$R_{g1} = 2.0\text{meg}$ $R_{g1} = 2.0\text{meg}$	0.25 0.325	2000 1700	4.2 2.9	1.7 1.2	—5.5 —4.0	3E6

†Triode connected, screen and suppressor tied to plate.

♦Each section.

*Class Code: H=Heptode.

P=Pentode.

TE=Tetrode.

TABLE IV. (continued) Voltage Amplifiers

TYPE	DESCRIPTION				CONSTR.	CATHODE				MAX. RATINGS				SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION									
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS		HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID 1 VOLTS	CATHODE RES. OHMS & MISCELLANEOUS	PLATE RESISTANCE MEG. (APPROXIMATE)	TRANSCONDUCTANCE μmhos	PLATE MA	SCREEN MA	GRID VOLTS (APPROX.) FOR CUTOFF	TYPE		
6AB7/1853	P	6AC7	8N	Octal	Htr.	6.3	0.45	300	200	3.75	0.65	R-F Amp. Class A	300 300	200 200	-3.0 3.0	$R_{g2} = .3\text{meg}$.7 .7	5000 5000	12.5 12.5	3.2 3.2	-15 -22.5	6AB7/1853			
6AJ5	P		7BD	Min.-7	Htr.	6.3	0.175	180	140	1.7	0.5	Class A	28	28	-1	—	.1	2500	2.7	1.0	-4.5	6AJ5			
6AJ7	P	6AC7	8N	Octal	Htr.	6.3	0.45	300	150	3.02	0.38	Class A	300	150	$E_{c3} = 0$	160	1.0	9000	10.0	2.5	—	6AJ7			
6AS6	P		7CM	Min.-7	Htr.	6.3	0.175	180	140	1.7	.75	R-F Amp. Class A	120 120	120 120	-2.0 -2.0	$E_{c3} = -3$ $E_{c3} = 0$	— .11	1850 3200	3.6 5.2	4.8 3.5	-10 -7.5	6AS6			
6BU5	P	6BD4A	8FP	Octal	Htr.	6.3	0.15	20000	100	20	0.1	TV High Voltage Regulator	20000 20000	70 70	-3.4 -2.4	— $E_{c3} = 0$	— —	— —	0.55 1.0	— 0.4	— -6.5	6BU5			
6C6	P	77	6F	Octal	Htr.	6.3	0.3	300 250†	125 —	0.75 1.75†	0.1 —	Class/Pentode A Triode†	100 250 180 250	100 100 — —	-3.0 -3.0 -5.3 -8.0	— $\mu = 20$ $\mu = 20$	1.0 1.0 .011 .011	1185 1225 1800 1900	2.0 2.0 5.3 6.5	0.5 0.5 — —	-7 -7 — —	6C6			
6D6	P	6K7GT	6F	Small-6	Htr.	6.3	0.3	300	100	2.25	0.25	R-F Amp. Class A	100 250	100 100	-3.0 -3.0	— —	0.25 0.8	1500 1600	8.0 8.2	2.2 2.0	-50 -50	6D6			

6D7	P	6E7	7H	Small-7	Htr.	6.3	0.3	Same as 6C6											6D7			
6DB6	P		7CM	Min.-7	Htr.	6.3	0.3	300	150	3.0	1.0	Class A	150	150	-1.0	$G_3 \text{ Volts} = -3$.05	$g_m G_1 = 2050$ $g_m G_3 = 1000$	5.8	6.6	$G_1 = 6.5$ $G_3 = 9.5$	6DB6
6E7	P	6D6	7H	Small-7	Htr.	6.3	0.3	Same as 6D6											6E7			
6J7, G, GT	P	6C6 6D6	7R	Octal	Htr.	6.3	0.3	300 250†	125 —	0.75 1.75†	0.10 —	Class { Pentode A { Triode†	100 250 180 250	100 100 — —	-3.0 -3.0 -5.3 -8.0	— — — —	1.0 1.0 .0110 .0105	1185 1225 1800 1900	2.0 2.0 5.3 6.5	0.5 0.5 — —	-7 -7 — —	6J7, G, GT
6R6G	P		6AW	Octal	Htr.	6.3	0.3	—	—	—	—	R-F Amp. Class A	250	100	-3.0	—	.8	1450	7.0	1.7	—	6R6G
6S7G	P	6SS7	7R	Octal	Htr.	6.3	0.15	300	100	2.25	0.25	R-F Amp. Class A	135 250	67.5 100	-3.0 -3.0	— —	3.0 1.0	1250 1750	3.7 8.5	0.9 2.0	-25 -38.5	6S7G
6SD7GT	P		8N	Octal	Htr.	6.3	0.3	300	125	4	.4	R-F Amp. Class A	100 250 250	100 100 125	-2.0 -2.0 -2.0	— — —	0.25 1.0 0.7	3350 3000 4250	5.7 6.0 9.5	2.0 1.9 3.0	-11 -11 -27	6SD7GT
6SE7GT	P	6SJ7GT	8N	Octal	Htr.	6.3	0.3	—	—	—	—	R-F Amp. Class A	100 250	100 100	-1.0 -1.5	— —	0.25 1.0	3100 3400	5.5 4.5	2.4 1.5	— —	6SE7GT
6SS7	P	6SG7GT 6W7G	8N	Octal	Htr.	6.3	0.15	300	100	2.25	0.35	R-F Amp. Class A	100 250	100 100	-1.0 -3.0	— —	0.12 1.0	1930 1850	12.2 9.0	3.1 2.0	-35 -35	6SS7
6U7G	P	6SK7GT	7R	Octal	Htr.	6.3	0.3	300	100	2.25	0.25	R-F Amp. Class A	100 250	100 100	-3.0 -3.0	$E_{c3} = 0$ $E_{c3} = 0$	0.25 0.8	1500 1600	8.0 8.2	2.2 2.0	— —	6U7G
6W7G	P		7R	Octal	Htr.	6.3	0.15	—	—	—	—	R-F Amp. Class A	250	100	-3.0	—	1.5	1225	2.0	0.5	—	6W7G

†Triode connected, screen and suppressor tied to plate. ♦Each section. *Class Code: H=Heptode. P=Pentode. TE=Tetrode.

TABLE IV. (continued) Voltage Amplifiers

TYPE	DESCRIPTION			CONSTR.			CATHODE			MAX. RATINGS			SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION							
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID 1 VOLTS	CATHODE RES. & MISCELLANEOUS OHMS	PLATE RESISTANCE MEG. (APPROXIMATE)	TRANSCONDUCTANCE μ -mhos	PLATE MA	SCREEN MA	GRID VOLTS (APPROX.) FOR CUTOFF	TYPE
7A7	P	6SK7 7B7	8V	Loctal	Htr.	6.3	0.3	300	125	4.0	0.4	R-F Amp. Class A	100 250	100 100	-1.0 -3.0	60 260	0.12 0.8	2350 2000	13.0 9.2	4.0 2.6	-35 -35	7A7
7AB7	P		8B0	Loctal	Htr.	6.3	0.15	300	100	1.2	0.15	R-F Amp Class A	250	100	-2.0	—	0.5	1800	4.0	1.3	-9	7AB7
7AD7	P	6AG7	8V	Loctal	Htr.	6.3	0.6	300	300	10.0	1.2	Video Class A	300	150	-3.0	68	0.3	9500	28.0	7.0	—	7AD7
7AG7	P	6SH7	8V	Loctal	Htr.	6.3	0.15	300	300	2.0	0.75	R-F Amp Class A	100 250	100 250	-1.0 0	— 250	1.0 1.0	2600 4200	1.6 6.0	0.5 2.0	-3.5 -10.0	7AG7
7AH7	P		8V	Loctal	Htr.	6.3	0.15	300	300	2.0	0.7	Class A	250	250	—	250	1.0	3300	6.8	1.9	-20	7AH7
7AJ7	P		8V	Loctal	Htr.	6.3	0.3	300	100	1.0	0.1	Class A	100 250	100 100	-1.0 -3.0	130 100	0.4 1.0	2275 1575	5.7 2.2	1.8 0.7	— —	7AJ7
7B7	P	6SK7 7A7	8V	Loctal	Htr.	6.3	0.15	300	100	2.25	0.25	R-F Amp. Class A	100 250	100 100	-3.0 -3.0	300 300	0.3 0.75	1675 1750	8.2 8.5	1.8 1.7	-40 -40	7B7
7C7	P	6SJ7	8V	Loctal	Htr.	6.3	0.3	300	100	1.0	0.1	Class A	100 250	100 100	-1.0 -3.0	130 1000	0.4 1.0	2275 1575	5.7 2.2	1.8 0.7	-7 -7	7C7

7G7	P		8V	Loctal	Htr.	6.3	0.45	300	100	1.5	0.3	R-F Amp. Class A	250	100	-2.0	$E_{c3}=0$	0.8	4500	6.0	2.0	-7	7G7
7G8	TE+TE		8BV	Loctal	Htr.	6.3	0.3	300	100	1.5	0.1	R-F Amp. Class A	250	100	-2.5	—	0.225	2100	4.5	0.8	-11	7G8
7H7	P	6AB7	8V	Loctal	Htr.	6.3	0.3	300	150	2.5	0.5	R-F Amp. Class A	100 250	100 150	-1.5 0	— 180	0.35 0.8	4000 4000	7.5 10.0	2.6 3.2	-12 -19	7H7
7L7	P	6SE7	8V	Loctal	Htr.	6.3	0.3	300	125	4.0	0.4	R-F Amp. Class A	100 250	100 100	-1.0 -1.5	125 250	0.1 1.0	3000 3100	5.5 4.5	2.4 1.5	-6 -6	7L7
7T7	P		8V	Loctal	Htr.	6.3	0.3	300	150	3.0	0.7	R-F Amp. Class A	100 250	100 150	-1.0 -1.0	— —	0.35 0.9	4000 4900	5.3 10.8	2.1 4.1	-4.0 -5.5	7T7
7V7	P	7W7	8V	Loctal	Htr.	6.3	0.45	300	150	4.0	0.8	R-F Amp. Class A	300 300	150 $E_{cc2}=300$	— $R_{g2}=40K$	160 160	0.3 0.3	5800 5800	10.0 10.0	3.9 3.9	-8 -16	7V7
7W7	P	7V7	8BJ	Loctal	Htr.	6.3	0.45	300	150	4.0	0.8	R-F Amp. Class A	300 300	150 $E_{cc2}=300$	— $R_{g2}=40K$	160 160	0.3 0.3	5800 5800	10.0 10.0	3.9 3.9	-8 -16	7W7
12AH6	P	6AH6	7BK	Min.-7	Htr.	12.6	0.225	300	150	3.2	0.4	Class Pentode A (Triode)	300 150	150 —	$E_{c3}=0$ $E_{c3}=0$	160 160	500K 3.6K	9000 11000	10.0 12.5	2.5 $\mu=40$	-7.0 -7.0	12AH6
12AW6	P	12AU6	7CM	Min.-7	Htr.	12.6	0.15	300 300†	150 —	2.0 2.5†	0.5 —	Class Pentode A (Triode)	100 250 180 250	100 150 — —	— — — —	100 200 350 825	0.3 0.8 7.9K 11K	4750 5000 5700 3800	5.5 7.0 7.0 5.5	1.6 2.0 $\mu=45$ $\mu=42$	-5.0 -8.0 — —	12AW6
12B7	P	14A7	8V	Loctal	Htr.	12.6	0.15	Same as 7A7														12B7

†Triode connected, screen and suppressor tied to plate. †Each section. *Class Code: H=Heptode P=Pentode, TE=Tetrode.

TABLE IV. (continued) Voltage Amplifiers

TYPE	DESCRIPTION				CONSTR.	CATHODE				MAX. RATINGS	SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION										
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS		HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS			SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID 1 VOLTS	CATHODE RES. OHMS & MISCELLANEOUS	PLATE RESISTANCE MEG. (APPROXIMATE)	TRANSCONDUCTANCE μ mbhos	PLATE MA
12CS6	H	6CS6	7CH	Min.-7	Htr.	12.6	0.15	300	100	1.0	1.0	Class A	100 100	30 30	0 -1.0	$E_{c3} = -1$ $E_{c3} = 0$	0.7 1.0	1250 950	0.8 0.75	4.0 1.1	— —	12CS6
12J7, G, GT	P	12SJ7	7R	Octal	Htr.	12.6	0.15	Same as 6J7											12J7, G, GT			
12K7G, GT	P		7R	Octal	Htr.	12.6	0.15	300	125	2.75	0.35	R-F Amp. Class A	100 250	100 125	-1.0 -3.0	$E_{c3} = 0$ $E_{c3} = 0$	0.15 0.6	1650 1650	9.5 10.5	2.7 2.6	-38.5 -52.5	12K7G, GT
12SH7	P	6SH7	8BK	Octal	Htr.	12.6	0.15	300	150	3.0	0.7	R-F Amp. Class A	100 250	100 150	-1.0 -1.0	— —	0.35 0.90	4000 4900	5.3 10.8	2.1 4.1	-4.0 -5.5	12SH7
12SJ7, GT	P	6SJ7	8N	Octal	Htr.	12.6	0.15	300 250†	100 —	2.5 2.5†	0.4 —	R-F Amp./Pentode Class (Triode)† A	100 250 250	100 100 —	-3.0 -3.0 -8.5	— — —	0.7 1.0 7.6K	1575 1650 2500	2.9 3.0 9.2	0.9 0.8 $\mu = 19$	-8.0 -8.0 —	12SJ7, GT
14A7	P	12B7	8V	Loctal	Htr.	12.6	0.15	Same as 7A7											14A7			
14C7	P	12B7	8V	Loctal	Htr.	12.6	0.15	Same as 7C7											14C7			
14H7	P		8V	Loctal	Htr.	12.6	0.15	Same as 7H7											14H7			

14W7	P		8BJ	Loctal	Htr.	12.6	0.225	Same as 7W7												14W7		
15	P		5F	Small-5	Htr.	2.0	0.22	—	—	—	—	R-F Amp. Class A	67.5 135	67.5 67.5	—1.5 —1.5	—	0.63 0.8	710 750	1.85 1.85	0.3 0.3	—	15
22	TE		4K	Medium-4	Fil.	3.3	0.132	—	—	—	—	R-F Amp. Class A	135	67.5	—1.5	—	0.25	500	3.7	1.3	—	22
24A	TE	58	5E	Small-5	Htr.	2.5	1.75	275	90	—	—	R-F Amp. Class A	180 250	90 90	—3.0 —3.0	—	0.4 0.6	1000 1050	4.0 4.0	1.7 1.7	—	24A
26A6	P		7BK	Min.-7	Htr.	26.5	0.07	—	—	—	—	R-F Amp.	26.5 250	26.5 250	0 —	$R_{g1} = 2 \text{ meg}$ 125	0.25 1.0	2000 4000	1.7 10.5	0.7 4.0	—	26A6
32	TE		4K	Medium-4	Fil.	2.0	0.06	180	67.5	—	—	R-F Amp. Class A	135 180	67.5 67.5	—3.0 —3.0	—	0.95 1.2	640 650	1.7 1.7	0.4 0.4	—	32
34	P		4M	Medium-4	Fil.	2.0	0.06	180	67.5	—	—	R-F Amp. Class A	67.5 135 180	67.5 67.5 67.5	—3.0 —3.0 —3.0	—	0.4 0.6 1.0	560 600 620	2.7 2.8 2.8	1.1 1.0 1.0	—22.5 —22.5 —22.5	34
35/51	TE		5E	Medium-5	Htr.	2.5	1.75	250	90	—	—	R-F Amp. Class A	180 250	90 90	—3.0 —3.0	—	0.3 0.4	1020 1050	6.3 6.5	2.5 2.5	—40 —40	35/51
36	TE	6C6	5E	Small-5	Htr.	6.3	0.3	250	90	—	—	R-F Amp. Class A Detector	135 180 250 250	67.5 90 90 90	—1.5 —3.0 —3.0 —8.0	—	0.475 0.50 0.55	1000 1050 1080	2.8 3.1 3.2	— — 1.7	— — —	36
												Adjust I_b to 0.1 ma, no signal. $R_L = 0.25 \text{ meg.}$										
39/44	P	6D6 78	5F	Small-5	Htr.	6.3	0.3	250	90	—	—	R-F Amp. Class A	90 180 250	90 90 90	—3.0 —3.0 —3.0	—	0.375 0.75 1.0	960 1000 1050	5.6 5.8 5.8	1.6 1.4 1.4	— — —	39/44

†Triode connected, screen and suppressor tied to plate.

‡Each section.

*Class Code: H=Heptode.

P=Pentode.

TE=Tetrode.

TABLE IV. (continued) Voltage Amplifiers

DESCRIPTION		CONSTR.	CATHODE				MAX. RATINGS	SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION													
TYPE	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID 1 VOLTS	CATHODE RES. OHMS & MISCELLANEOUS	PLATE RESISTANCE MEG. (APPROXIMATE)	TRANSCONDUCTANCE μmhos	PLATE MA	SCREEN MA	GRID VOLTS (APPROX.) FOR CUTOFF	TYPE
44	P		5F	Small-5	Htr.	6.3	0.3	Same as 39/44											44			
51, S	TE		5E	Small-5	Htr.	2.5	1.75	Same as 35/51											51, S			
57	P		6F	Small-6	Htr.	2.5	1.0	300	125	0.75	0.1	Class A Amp. Detector	100 250 250	100 100	-3.0 -3.0	- -	1.0 1.0	1185 1225	2.0 2.0	0.5 0.5	-7.0 -7.0	57
57AS	P	6C6, 77	5A	Small-5	Htr.	6.3	0.4	Same as 57											57AS			
58	P		6F	Small-6	Htr.	2.5	1.0	300	100	2.25	0.25	R-F Amp. Class A	100 250	100 100	-3.0 -3.0	$E_{c3}=0$ $E_{c3}=0$	0.25 0.8	1500 1600	8.0 8.2	2.2 2.0	-50 -50	58
58AS	P		6F	Small-6	Htr.	2.5	1.0	Same as 58											58AS			
64, A	TE		5E	Small-5	Htr.	6.3	0.4	-	-	-	-	R-F Amp. Class A	180	90	-3.0	-	0.5	1050	3.1	1.5	-	64, A
65, A	TE		5E	Small-5	Htr.	6.3	0.4	-	-	-	-	R-F Amp. Class A	180	90	-3.0	-	0.75	1000	4.5	1.3	-	65, A

77	P	6C6 6J7	6F	Small-6	Htr.	6.3	0.3	300	100	.75	.10	Detector Class A Amp.	100 250	60 100	-1.5 -3.0	$E_{c3}=0$ $E_{c3}=0$	0.6 1.0	1100 1250	1.7 2.3	0.4 0.5	-5.5 -7.5	77
78	P	6D6	6F	Small-6	Htr.	6.3	0.3	300	250	2.75	0.35	R-F Amp. Class A	100 250 250	100 100 125	-1.0 -3.0 -3.0	$E_{c3}=0$ $E_{c3}=0$ $E_{c3}=0$	0.15 0.8 0.6	1650 1450 1650	9.5 7.0 10.5	2.7 1.7 2.6	-38 -42 -52	78
951	TE	1B4T 1B4P	4K	Medium-4	Fil.	2.0	0.6	—	—	—	—	Class A Amp.	180	67.5	-3.0	—	1.2	650	1.7	0.4	—	951
9003	P		7BD	Min.-7	Htr.	6.3	0.15	250	100	1.7	0.3	R-F Amp. Class A	250	100	-3.0	—	0.7	1800	6.7	2.7	-35	9003

†Triode connected, screen and suppressor tied to plate. †Each section. *Class Code: H=Heptode. P=Pentode. TE=Tetrode.

TABLE V.



CONVERTERS AND MIXERS

TYPE	DESCRIPTION				CONSTR.		CATHODE			MAXIMUM RATINGS					AVERAGE CHARACTERISTICS AND TYPICAL OPERATION										TYPE	
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS	OSC. ANODE VOLTS	OSC. ANODE WATTS	SCREEN WATTS	CATHODE MA	PLATE VOLTS	SCREEN VOLTS	SIG. GRID VOLTS	OSC. ANODE VOLTS	OSC. GRID RES., MEG.	PLATE MEGOHMS	CONVERSION TRANS. μ MHOS	CATHODE MA	PLATE MA	SCREEN MA	OSC. ANODE MA		OSC. GRID MA
1A6	H	1C6 1C7G	6L	Small-6	Fil.	2.0	0.06	—	—	—	—	—	135 180	67.5 67.5	—3.0 —3.0	135 180	—	0.4 0.5	275 300	—	1.8 1.5	2.1 2.0	2.0 2.5	—	1A6	
1B7G, GT	H	1A7GT 1L6	7Z	Octal	Fil.	1.4	0.1	—	—	—	—	—	90	45	0	90	0.2	0.35	350	—	1.5	1.3	1.6	.035	1B7G, GT	
1C6	H	—	6L	Small-6	Fil.	2.0	0.12	180	67.5	135	0.4	0.2	9.0	135 180	67.5 67.5	—3.0 —3.0	135 180	0.5 0.5	0.6 0.7	300 325	7.1 7.7	1.3 1.5	2.5 2.0	3.1 4.0	0.2 0.2	1C6
1C7G	H	1C6 1D7G	7Z	Octal	Fil.	2.0	0.12	Same as 1C6					Same as 1C6										1C7G			
1C8	H	—	8CN	Submin.-8	Fil.	1.25	0.04	—	—	—	—	—	30	30	0	—	0.1	0.3	100	—	0.32	0.75	—	.030	1C8	
1D7G	H	1A6	7Z	Octal	Fil.	2.0	0.06	—	—	—	—	—	135 180	67.5 67.5	—3.0 —3.0	135 135	.05 .05	0.4 0.5	275 300	6.2 6.2	1.2 1.3	2.5 2.4	2.3 2.3	0.2 0.2	1D7G	
1L6	H	1U6	7DC	Min.-7	Fil.	1.4	0.05	110	65	110	—	—	4.0	90	45	0	90	0.2	0.65	300	2.35	0.5	0.6	1.2	.035	1L6
1LA6	H	1A7GT 1L6	7AK	Loctal	Fil.	1.4	0.05	90	55	90	—	—	3.0	90	45	0	90	0.2	0.75	250	2.4	0.55	0.6	1.2	.035	1LA6

1LB6	H	—	8AX	Loctal	Fil.	1.4	0.05	—	—	—	—	—	90	67.5	0	—	—	0.2	100	—	0.4	2.2	—	—	1LB6	
1LC6	H	—	7AK	Loctal	Fil.	1.4	0.05	90	35	45	—	—	3.0	45 90	35 35	0 0	45 45	0.2 0.2	0.65 0.3	250 275	2.9 2.9	0.7 0.7	0.75 0.7	1.4 1.4	.035 .035	1LC6
1U6	H	1L6	7DC	Min.-7	Fil.	1.4	0.025	110	65	110	—	—	4.0	65 90	45 45	0 0	67.5 90	0.2 0.2	0.5 0.5	280 300	2.3 2.4	0.5 0.6	0.7 0.6	1.0 1.1	0.028 0.028	1U6
2A7/S	H	—	7C	Small-7	Fil.	2.5	0.8	300	100	200	0.75	0.3	14.0	100 250	50 10.0	—1.5 —3.0	100 250*	.05 .05	0.6 0.36	360 550	4.6 10.6	1.1 3.5	1.3 2.7	2.0 4.0	0.25 0.4	2A7/S
6A7	H	6A8 6K8	7C	Small-7	Htr.	6.3	0.3	Same as 2A7/S															6A7			
6A8, G, GT	H	6A7S 6K8GT	8A	Octal	Htr.	6.3	0.3	Same as 2A7/S															6A8, G, GT			
6BA7	H	6SB7Y	8CT	Min.-9	Htr.	6.3	0.3	300	100	—	—	1.5	22	100 250	100 100	—1.0 —1.0	— —	.02 .02	0.5 1.0	900 950	14.2 14.2	3.6 3.8	10.2 10.0	— —	0.35* 0.35*	6BA7
6D8, G	H	7A8 6K8	8A	Octal	Htr.	6.3	0.15	300	100	200	0.75	0.3	13	135 250	67.5 100	—3.0 —3.0	135 250*	.05 .05	0.4 0.4	325 550	6.4 10.8	1.5 3.5	1.7 2.6	3.0 4.3	0.2 0.4	6D8, G
6J8G	T+H	7J7	8H	Octal	Htr.	6.3	0.3	250	100	150	1.25	—	14	100 250	100 100	—3.0 —3.0	100 250*	.05 .05	0.9 4.0	250 250	— —	1.4 1.3	3.0 2.9	3.0 5.0	0.3 0.4	6J8G
6SB7Y	H	6BA7	8R	Octal	Htr.	6.3	0.3	300	100	—	2.0	1.5	22	100 250	100 100	—1.0 —1.0	— —	.02 .02	0.5 1.0	900 950	14.2 14.2	3.6 3.8	10.2 10.0	— —	0.35 0.35	6SB7Y
7A8	O	6A7 6A8 7B8	8U	Loctal	Htr.	6.3	0.15	300	200	200	0.75	0.3	13	100 250	75 100	—3.0 —3.0	100* 250*	.05 .05	0.65 0.7	375 550	7.5 10.8	1.8 3.0	2.7 3.2	2.8 4.2	0.2 0.4	7A8

*H=Heptode. T+H=Triode and Heptode. T+HX=Triode and Hexode. T+P=Triode and Pentode. O=Octode. *Through 20,000 ohms resistance.

TABLE V.(continued) Converters and Mixers

TYPE	DESCRIPTION				CONSTR.		CATHODE				MAXIMUM RATINGS						AVERAGE CHARACTERISTICS AND TYPICAL OPERATION										TYPE
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS	OSC. ANODE VOLTS	OSC. ANODE VOLTS	SCREEN WATTS	CATHODE MA	PLATE VOLTS	SCREEN VOLTS	SIG. GRID VOLTS	OSC. ANODE VOLTS	OSC. GRID RES., MEG.	PLATE MEGOHMS	CONVERSION TRANS. μ MHDS	CATHODE MA	PLATE MA	SCREEN MA	OSC. ANODE MA	OSC. GRID MA		
7B8	H	6J8G 6K8	8X	Loctal	Htr.	6.3	0.3	300	100	200	.75	0.3	14	100 250	50 100	-1.5 -3.0	100 —	.05 .05	0.6 0.36	360 550	4.6 10.6	1.1 3.5	1.3 2.7	2.0 4.0	— —	7B8	
7J7	T+H	6A8 6K8	8BL	Loctal	Htr.	6.3	0.3	300 150	100 Triode	— —	— 1.25	— —	14 —	100 250 150	100 100 —	-3.0 -3.0 -3.0	100 250* Triode	.05 .05	0.5 1.5 .0107	280 290 GM=1400	7.7 9.6 6.6	1.5 1.4 6.6	2.6 2.8 —	3.2 5.0 —	0.3 0.4 —	7J7	
7Q7	H	6SA7	8AL	Loctal	Htr.	6.3	0.3	300	100	—	—	1.0	14	100 250	100 100	-2.0 -2.0	— —	.02 .02	0.5 1.0	525 550	12.3 12.5	3.3 3.5	8.5 8.5	— —	0.5 0.5	7Q7	
7S7	T+H	6K8 7J7	8BL	Loctal	Htr.	6.3	0.3	300 175	100 —	Heptode Triode	0.4 —	14 —	100 250	100 100	-2.0 -2.0	100 250*	.05 .05	0.5 1.25	500 525	8.2 10.2	1.9 1.8	3.0 3.0	3.0 5.0	.03 .04	7S7		
12A8, G, GT	H		8A	Octal	Htr.	12.6	0.15	Same as 2A7/S																12A8, G, GT			
12BA7	H		8CT	Min.-9	Htr.	12.6	0.15	Same as 6BA7																12BA7			
12K8, GT	T+HX		8K	Octal	Htr.	12.6	0.15	300	150	125	0.75	0.7	16	100 250	100 100	-3.0 -3.0	100 100	.05 .05	0.4 0.6	325 350	12.5 12.5	2.3 2.5	6.2 6.0	3.8 3.8	0.15 0.15	12K8, GT	
14B8	H		8X	Loctal	Htr.	12.6	0.15	Same as 7B8																14B8			

14J7	T+H		8BL	Loctal	Htr.	12.6	0.15	Same as 7J7														14J7				
14Q7	H		8AL	Loctal	Htr.	12.6	0.15	Same as 7Q7														14Q7				
14S7	T+H		8BL	Loctal	Htr.	12.6	0.15	Same as 7S7														14S7				
19X8	T+P	6X8	9AK	Min.-9	Htr.	18.9	0.15	250	250	250	1.5	0.4	—	—	—	—	150	.0027	Triode Section at 250 MC				13	3.6	19X8	
																	150	.0027	0.75	2100	—	6.2	1.8	Eg = 2.6V		
26D6	H		7CH	Min.-7	Htr.	26.5	0.07	300	100	—	1.0	1.0	14	100	100	—1.5	—	.020	0.5	455	—	2.8	8.0	—	—	26D6
														250	100	—1.5	—	.020	1.0	475	—	3.0	7.8	—	—	
														20.5	26.5	—0.5	—	.020	—	270	2.5	0.45	—	1.6	0.1	

*H=Heptode. T+H=Triode and Heptode. T+HX=Triode and Hexode. T+P=Triode and Pentode. O=Octode. *Through 20,000 ohms resistance.

TABLE VI.

CBS

AUDIO POWER AMPLIFIERS (Triodes, Tetrodes, and Pentodes)

TYPE	DESCRIPTION				CONSTR.		CATHODE		MAXIMUM RATINGS				SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION												TYPE
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR. FIL.	VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	TRANSCONDUCTANCE μMHOS	PEAK SIGNAL VOLTS§	PLATE MA. ZERO SIGNAL	PLATE MA. MAX. SIGNAL	SCREEN MA. ZERO SIG.	SCREEN MA. MAX. SIG.	TRIODE AMP. FACTOR	LOAD RESISTANCE¶	MAX. OUTPUT WATTS	DISTORTION %		
1A5G, GT	P	1LA4 1LB4	6X	Octal	Fil.	1.4	0.05	110	110	$I_k = 6.0\text{ma}$	Class A	85 90	85 90	-4.5 -4.5	800 850	4.5 4.5	3.5 4.0	3.5 4.0	0.7 0.8	1.0 1.1	—	25K 25K	.100 .115	10.0 7.0	1A5G, GT		
1C5G, GT	P	1S4	6X	Octal	Fil.	1.4	0.10	110	110	Zero Signal $I_k = 12\text{ma}$	Class A	83 90	83 90	-7.0 -7.5	1500 1550	7.0 7.5	7.0 7.5	7.3 7.8	1.6 1.6	3.5 3.5	—	9K 8K	.200 .240	10.0 10.0	1C5G, GT		
1E7G, GT	P+P		8C	Octal	Fil.	2.0	0.24	135	135	1.5 0.5	Class A Class A, P-P	90 135	90 135	-3.0 -7.5	1150 —	3.0 15.0	3.8 7.0	— 10.5	1.1 2.0	— 3.5	—	20K 24K	.110 .575	5.5 5.5	1E7G, GT		
1F4	P	1F5G	5K	Octal	Fil.	2.0	0.12	180	180	0.75 1.75	Class A Class AB, P-P	90 135 180	90 135 180	-3.0 -4.5 -7.5	1400 1700 —	3.0 4.5 15.0	4.0 8.0 19.0	— — 21.0	1.1 2.4 5.5	— — 7.0	—	20K 16K 20K	.110 .310 1.25	6.0 5.0 4.5	1F4		
1F5G	P	1F4	6X	Octal	Fil.	2.0	0.12	Same as 1F4					Same as 1F4												1F5G		
1G5G, GT	P	1J5G	7AB	Octal	Fil.	2.0	0.12	—	—	—	Class A	90 135	90 135	-6.0 -13.5	1500 1550	—	8.7 9.7	—	3.0 3.6	—	—	8K 9K	.250 .550	—	1G5G, GT		
1G6G, GT	T+T		7AB	Octal	Fil.	1.4	0.10	110	—	$i_p = 20\text{ma}$	Class A Class B, P-P	90 90	—	0 0	675 —	— 48	1.0 2.0	— 11.0	— —	— —	30.0	12K 12K	.675 .350	— 4.0	1G6G, GT		
1J5G	P		6X	Octal	Fil.	2.0	0.12	—	—	—	Class A	135	135	-16.5	1000	—	7.0	—	1.8	—	—	13.5K	.450	—	1J5G		

1J6G, GT	T+T	19	7AB	Octal	Fil.	2.0	0.24	—	—	—	—	Class B, P-P	135	—	0	—	—	5.0	50	—	—	Pin= .17W	10K	2.1	—	1J6G, GT
												Class A	135	—	—3.0	—	—	3.4	—	—	—	—	30.0	10K	1.9	
1LA4/E	P		5AD	Loctal	Fil.	1.4	0.05	Same as 1A5G/GT				Same as 1A5G/GT											1LA4/E			
1LB4	P		5AD	Loctal	Fil.	1.4	0.05	110	110	Zero Signal $I_k=6\text{ma}$	Class A	90 45	90 45	—9.0 —4.5	925 650	9.0 4.5	5.0 1.6	—	1.0 0.3	—	—	12K 20K	.200 .035	10.0 10.0	1LB4	
1Q5G, GT	BP	1A5GT	6AF	Octal	Fil.	1.4	0.10	110	110	Zero Signal $I_k=12\text{ma}$	Class A	90 85	90 85	—4.5 —5.0	2200 1950	4.5 5.0	9.5 7.0	—	1.3 0.8	—	—	8K 9K	.270 .250	6.0 5.5	1Q5G, GT	
1S4	P	3S4	7AV	Min.-7	Fil.	1.4	0.10	90	67.5	Zero Signal $I_k=9.0\text{ma}$	Class A	45 67.5 90	45 67.5 67.5	—4.5 —7.0 —7.0	1250 1550 1575	4.5 7.0 7.0	3.8 7.2 7.4	—	0.8 1.5 1.4	—	—	8K 5K 8K	.065 0.18 0.27	12.0 10.0 12.0	1S4	
1T5GT	P	1C5GT 1Q5GT	6X	Octal	Fil.	1.4	0.05	110	110	Zero Signal $I_k=7.3\text{ma}$	Class A	90	90	—6.0	1150	—	6.5	6.5	0.8	1.5	—	14K	.170	7.5	1T5GT	
1W4	P		5BZ	Min.-7	Fil.	1.4	.050	110	110	$I_k=6.0\text{ma}$ $R_{g1}=1.0$ meg	Class A	45 67.5 90	45.0 67.5 90	—4.5 —6.0 —9.0	650 875 925	4.5 6.0 9.0	1.6 3.8 5.0	—	0.2 0.8 1.0	—	—	20K 16K 12K	.035 .100 .200	10.0 10.0 10.0	1W4	
2A3	T	45	4D	Medium-4	Fil.	2.5	2.5	300	—	15	—	Class A Class AB, P-P Class AB, P-P	250 300 300	— — —	—45.0 —62.0 780	5250 — —	— — —	60.0 — —	— — —	— — —	4.2 — —	2.5K 3K 5K	3.5 15.0 10.0	5.0 2.5 5.0	2A3	
2A3H	T	2A3	4D	Medium-4	Htr.	2.5	2.5	Same as 2A3				Same as 2A3											2A3H			
2A5	P		6B	Medium-6	Htr.	2.5	1.75	375	285	11.0	3.75	Class A	250 285	250 285	—16.5 —20.0	2500 2550	16.5 20.0	34.0 38.0	36.0 40.0	6.5 7.0	10.5 13.0	— —	7K 7K	3.2 4.8	8.0 9.0	2A5

‡Cathode resistor in ohms.

§Grid-to-grid voltage in push-pull operation.

†Triode connected, screen tied to plate.

‡Plate-to-plate load in push-pull operation.

P-P Push-pull operation, two tubes or both sections of double unit tubes. Values for both tubes or sections.

*Class code: BP=Beam pentode. D+P=Diode and pentode. P=Pentode. T=Triode. T+T=Duotriode. TE=Tetrode. T+P=Triode and pentode.

TABLE VI. (continued) Audio Power Amplifiers

TYPE	DESCRIPTION				CONST.		CATHODE			MAXIMUM RATINGS			SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION											TYPE					
	CLASS*	NEAREST EQUIVALENT		BASING	BASE & PINS		HTR./FIL.		VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	TRANSCONDUCTANCE μmhos	PEAK SIGNAL VOLTAGE		PLATE MA. ZERO SIGNAL		SCREEN MA. MAX. SIGNAL			SCREEN MA. ZERO SIG.		TRIODE AMP. MAX. SIG.		LOAD RESISTANCE ^Ω
3B7/1291	T+T	7BE	Loctal	Fil.	1.4	0.22	180	$I_k = 15\text{ma}$	2.7	$I_{c1} = 4\text{ma}$	Class AB ₂ , P-P		90	—	0	1850	23	10.4	21.0	$I_{c1} = 3.6\text{ma}$		20	8K	1.0	8.0	3B7/1291					
					2.8	0.11	180	$I_k = 15\text{ma}$	2.7	$I_{c1} = 2.7\text{ma}$	Class AB ₂ , P-P		135	—	0	1900	19	18.2	22.0	$I_{c1} = 2.7\text{ma}$		20	16K	1.5	8.0						
3D6	BP	6BA	Loctal	Fil.	1.4	0.22	180	135	4.5	0.9	Class A		90	90	-4.5	2400	4.5	9.5	8.5	1.6	3.2	—	8K	.27	5	3D6					
					2.8	0.11	—	—	—	—	—	—	135	90	-4.5	2400	4.5	9.8	9.8	1.2	2.0	—	12K	.50	5						
					—	—	—	—	—	—	—	—	150	90	-4.5	2400	4.5	9.9	10.2	1.0	1.8	—	14K	.60	5						
3E5	BP	3V4	6BX	Min.-7	Fil.	1.4	.05	.025	110	110	$I_k = 8\text{ma}$	Class A Series fil.		90	90	-8.0	1100	8.0	5.5	—	1.5	—	—	8K	.175	11.0	3E5				
3LE4	P	3LF4	6BA	Octal	Fil.	1.4	0.1	—	—	—	—	Class A		90	90	-9.0	1600	—	9.0	—	1.8	—	—	6K	.300	—	3LE4				
						2.8	.05	—	—	—	—	—	—	90	90	-9.0	1750	—	10.0	—	2.0	—	—	6K	.325	—					
3LF4	BP	3LE4 3V4	6BB	Octal	Fil.	1.4	0.1	.05	110	110	$I_k = 6\text{ma}$	Class A Series fil.		110	110	-6.6	2000	5.1	8.5	—	1.1	—	—	8K	.330	8.5	3LF4				
6A3	T	6A5G 6B4G	4D	Medium-4	Fil.	6.3	1.0	325	—	15	—	Class A		250	—	-45	5250	—	60	—	—	—	4.2	2.5K	3.2	5.0	6A3				
												Class AB, P-P		325	—	-68	—	—	80	—	—	—	3K	15	2.5						
												—		325	—	-860 ^φ	—	—	80	—	—	—	5K	10	5.0						

6A4	P	6K6GT	5B	Medium-5	Fil.	6.3 6.3	0.30 0.30	—	—	—	—	Class A	135 180	135 180	—9.0 —12.0	2100 2500	—	13.0 22.0	—	2.8 3.9	—	—	—	8K	0.7 1.5	—	6A4
6A5G	T	6A3 6B4G	6T	Octal	Htr.	6.3	1.0	—	—	—	—	Class A	250	0	—45.0	5250	—	60.0	—	0	—	4.2	2.5K	3.75	—	6A5G	
6A6	T+T	6N7GT	7B	Medium-7	Htr.	6.3	0.8	300 300	—	1.0 5.5	—	Class A Driver Class B, P-P	250 300 300	— — —	—5.0 0 0	3100 — —	—	6.0 58 82	— 35 35	— 70 70	— — —	35 — —	30K 8K 8K	— 10.0 10.0	— 4.0 8.0	6A6	
6AB6G	T+T	6N6G	7AU	Octal	Htr.	6.3	0.50	—	—	—	—	Direct input Coupled output	250 250	— —	0 —	— —	— —	— —	5.0 34.0	— —	— —	— —	8K	3.5	—	6AB6G	
6AC5G, GT	T		6Q	Octal	Htr.	6.3	0.4	250	—	10	—	Characteristics Class B, P-P	250 250	— —	+13 0	3400 —	— 70.0	32 5.0	— —	— —	— —	125 —	10K	R _p = 36.7K 8.0	—	6AC5G, GT	
6AC6GT	T+T		7AU	Octal	Htr.	6.3	1.10	—	—	—	—	Class A Driver	180	—	0	3000	—	45+7	—	—	—	54.0	4K	3.8	—	6AC6GT	
6AD7G	T+P	6BQ6	8AY	Octal	Htr.	6.3	0.85	—	—	—	—	T Class A P Class A	250 250	— 250	25.0 16.5	325 2500	— —	4.0 34.0	— —	— 6.5	— —	6 —	7K	3.2	—	6AD7G	
6AG6G	P		7S	Octal	Htr.	6.3	1.25	—	—	—	—	Class A	250	250	—6.0	10000	—	30.0	—	6.0	—	—	8.4K	3.8	—	6AG6G	
6AH5G	BP	6L6GB	6AP	Octal	Htr.	6.3	0.90	360	270	19	2.5	Class A	350	250	—18.0	5200	18.0	54.0	66.0	2.5	7.0	—	4.2K	10.8	15.0	6AH5G	
6AK7	P	6AG7	8Y	Octal	Htr.	6.3	0.65	—	—	—	—	Class A	300	150	—3.0	11000	18.0	30.0	—	7.0	—	—	1K	3.0	—	6AK7	
6AN5	P	6AQ5A	7BD	Min.-7	Htr.	6.3	0.45	120 300	120 300	4.2 1.7	1.4 0.56	Class A	120	120	120 ϕ	8000	—	35.0	—	12.0	—	—	2.5K	1.3	—	6AN5	

‡Cathode resistor in ohms.

§Grid-to-grid voltage in push-pull operation.

†Triode connected, screen tied to plate.

‡Plate-to-plate load in push-pull operation.

P-P Push-pull operation, two tubes or both sections of double unit tubes. Values for both tubes or sections.

*Class code: BP=Beam pentode. D+P=Diode and pentode. P=Pentode. T=Triode. T+T=Duotriode. TE=Tetrode. T+P=Triode and pentode.

TABLE VI. (continued) Audio Power Amplifiers

TYPE	DESCRIPTION			CONST.		CATHODE			MAXIMUM RATINGS			SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION												TYPE					
	CLASS*	NEAREST EQUIVALENT		BASE & PINS		HTR./FIL.		VOLTS		AMPERES		PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	TRANSCONDUCTANCE μmhos	PEAK SIGNAL VOLTS	PLATE MA, ZERO SIGNAL	PLATE MA, MAX. SIGNAL	SCREEN MA, ZERO SIG.	SCREEN MA, MAX. SIG.		TRIODE AMP. FACTOR	LOAD RESISTANCE	MAX. OUTPUT WATTS	DISTORTION %	
6AR6	BP		6BQ	Octal	Htr.	6.3	1.20	565	300	19	3.2	Class A† Class A	200 250	— 250	—12.5 —22.5	6000 5400	—	90.0 77.0	—	—	—	—	—	—	—	—	—	—	—	—	6AR6
6B4G	T	6A5G	5S	Octal	Same as 6A3												6B4G														
6B5	T+T	6AB6G	6AS	Medium-6	Htr.	6.3	0.8	—	—	—	—	Class A input output	300 300	— —	0 —	— 2400	15 45.0	— —	— —	— —	— —	— —	— —	— —	7K 4.0	— 5.0	—	—	6B5		
6D5G	T		6Q	Octal	Htr.	6.3	0.7	—	—	—	—	Class A	275	—	—40	—	—	—	—	—	31.0	—	—	4.7	7.2K	1.4	—	—	6D5G		
6E6	T+T		7B	Medium-7	Htr.	6.3	0.6	—	—	—	—	Class A	180 250	— —	—20.0 —27.5	— 1700	— —	— —	— —	11.5 18.0	— —	— —	— —	6.0 6.0	15K 14K	.75 1.6	— —	—	6E6		
6F6, G, GT	P	42	7S	Octal	Htr.	6.3	0.7	375 †350	285 —	11.0 Total = 10W†	3.75	Class A Class A Class AB, P-P Class AB, P-P†	285 250 375 350	285 250 250 —	—20.0 —16.5 —26.0 —38.0	2550 2500 — —	20.0 16.5 82.0 123.0	38.0 34.0 34.0 48.0	40.0 36.0 82.0 92	7.0 6.5 5.0 —	13.0 10.5 19.5 —	— — — —	— — — —	7K 7K 10K 6K	4.8 3.2 18.5 13.0	9.0 8.0 3.5 2.0	—	6F6, G, GT			
6G6G	P	6K6GT	7S	Octal	Htr.	6.3	0.15	180	180	2.75	0.50	Class A Class A†	180 135 180	180 135 —	—9.0 —6.0 —12.0	2300 2100 2000	9.0 6.0 12.0	15.0 11.5 11.0	— — —	— 2.0 —	— — —	— — —	— — —	400 360 9.5	10K 12K 12K	1.1 0.6 0.25	10.0 7.5 5.0	—	6G6G		

6N6G	T+T	6B5	7AU	Octal	Same as 6B5																		6N6G			
6U6GT	BP		7S	Octal	Htr.	6.3	0.75	200	135	11.0	2.0	Class A	110 135 200	110 135 135	-10.5 -13.5 -14.0	5600 6200 6200	10.5 13.5 14.0	44.5 55.0 55.0	47.0 60.0 62.0	4.0 5.0 3.0	11.0 15.0 13.0	— — —	2K 2K 3K	2.0 3.3 5.5	10.0 10.0 10.0	6U6GT
6V5G, GT	BP		6A0	Octal	Htr.	6.3	0.45	—	—	—	—	Class A	315	225	-13.0	3750	13.0	34.0	—	6.0	—	—	8.5K	5.5	—	6V5G, GT
6Y7G	T+T	6N7	8B	Octal	Htr.	6.3	0.6	—	—	—	—	Class B, P-P	250	—	0	—	—	21.0	—	—	—	—	14K	8.0	—	6Y7G
6Z7G	T+T		8B	Small-8	Htr.	6.3	0.3	180	—	8.0	—	Class B, P-P	135 180	—	0 0	9000 12000	—	6.0 8.4	—	—	—	—	15K 12K	4.2 1.5	—	6Z7G
7A5	BP	6Y6,G	6AA	Loctal	Htr.	6.3	0.75	125	125	5.5	1.2	Class A	110	110	-7.5	5800	7.5	40.0	41.0	3.0	7.0	—	2.5K	1.5	10.0	7A5
7B5	P	6K6GT 42	6AE	Loctal	Htr.	6.3	0.4	315	285	8.5	2.8	Class A	100 250 315	100 250 250	-7.0 -18.0 -21.0	1500 2300 2100	7.0 18.0 21.0	9.0 32.0 25.5	9.5 33.0 28.0	1.6 5.5 4.0	3.0 10.0 9.0	— — —	12K 7.6K 9K	.35 3.4 4.5	11.0 11.0 15.0	7B5
7C5	BP	6V6GT	6AA	Loctal	Htr.	6.3	0.45	315	285	12.0	2.0	Class A	180 250 315	180 250 225	-8.5 -12.5 -13.0	3700 4100 3750	8.5 12.5 13.0	29.0 45.0 34.0	30.0 47.0 35.0	3.0 4.5 2.2	4.0 7.0 6.0	— — —	5.5K 5K 8.5K	2.0 4.5 5.5	8.0 8.0 12.0	7C5
10	T		4D	Medium-4	Fil.	7.5	1.25	—	—	—	—	Class A	350 425	—	-32.0 -40.0	1550 1600	— 35	16.0 18.0	— —	— —	— —	8.0 8.0	11K 10.2K	0.9 1.6	—	10
12A/112A	T		4D	Medium-4	Fil.	5.0	0.25	—	—	—	—	Class A	90 135	—	-4.5 -9.0	1600 1700	— —	5.0 6.2	— —	— —	— —	8.5 8.5	5.4K 5.1K	.035 .13	—	12A/112A
12A5	P		7F	Small-7	Htr.	6.3 12.6	0.6 0.3	— —	— —	— —	— —	Class A	100 180	100 180	-15.0 -25.0	1700 2400	— —	17.0 45.0	— —	3.0 8.0	— —	— —	4.5K 3.3K	0.8 3.4	—	12A5

‡Cathode resistor in ohms.

§Grid-to-grid voltage in push-pull operation.

†Triode connected, screen tied to plate.

‡Plate-to-plate load in push-pull operation.

P-P Push-pull operation, two tubes or both sections of double unit tubes. Values for both tubes or sections.

*Class code: BP=Beam pentode. D+P=Diode and pentode. P=Pentode. T=Triode. T+T=Duotriode. TE=Tetrode. T+P=Triode and pentode.

TABLE VI. (continued) Audio Power Amplifiers

TYPE	DESCRIPTION				CONSTR.	CATHODE				MAX RATINGS	SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION												TYPE		
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS		HTR./FIL. VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS			PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	TRANSCONDUCTANCE μ MHOS	PEAK SIGNAL VOLTS	PLATE MA. ZERO SIGNAL	PLATE MA. MAX. SIGNAL	SCREEN MA. ZERO SIGNAL	SCREEN MA. MAX. SIGNAL		TRIODE MA. MAX. SIG.	LOAD AMP. FACTOR
12A6, GT	BP	14A5	7S	Octal	Htr.	12.6	0.15	—	—	—	—	Class A	250	250	—12.5	3000	—	30.0	—	3.5	—	—	7.5K	2.5	—	12A6, GT
12A7	D+P		7K	Octal	Htr.	12.6	0.3	—	—	—	—	H-W Rectifier Class A	A-C Volts per plate (RMS) = 125 Max. 135 135 —13.5 975 — 9.0 —						D-C output current = 30 ma Max. 2.5 — 100 13.5K 0.55 —						12A7	
12CS5	BP	12W6GT	9CK	Octal	Htr.	12.6	0.6	300	150	10	1.25	Class A	110 200 †225	110 125 —	—7.5 180 ϕ —30	8000 8000 3800	7.5 8.5 —	49.0 46.0 22.0	50.0 47.0 (G_1 Volts for $I_b = 0.5$ ma = —42)	4.0 2.2 —	10.0 8.5 —	— — —	2K 4K $R_a = 1.5K$	2.1 3.8 —	10 10 —	12CS5
12L8GT	P+P		8BU	Octal	Htr.	12.6	0.15	—	—	—	—	Class A	110 180	110 180	—5.5 —9.0	1680 2150	— —	6.1 13.0	— —	1.3 2.8	— —	— —	14K 10K	.3 1.0	— —	12L8GT
14A5	BP	12A6GT	6AA	Loctal	Htr.	12.6	0.15	300	300	7.5	1.5	Class A	250	250	—12.5	3000	12.5	30.0	32.0	3.5	5.5	—	7.5K	2.8	7	14A5
14C5	BP	12V6	6AA	Loctal	Htr.	12.6	0.225	—	—	—	—	—	Same as 7C5												14C5	
18	P	12V6	6B	Medium-6	Htr.	14.0	0.3	—	—	—	—	—	Same as 6F6G/6F6GT												18	
19	T+T	1J6GT	6C	Octal	Fil.	2.0	0.26	—	—	—	—	—	Same as 1J6G/1J6GT												19	

20	T		4D	Small-4	Fil.	3.3	0.132	—	—	—	—	Class A	90 135	—	—16.5 —22.5	450 600	—	2.8 6.0	—	—	—	—	3.5 3.5	9.6K 6.5K	.05 .13	—	20	
25A6, G, GT	P		7S	Octal	Htr.	25.0	0.3	160	135	5.3	1.9	Class A	95 160	95 120	—15.0 —18.0	2000 2375	—	20.0 33.0	—	4.0 6.5	—	—	—	4.5K 5K	0.9 2.2	—	25A6, G, GT	
25A7GT	D+P	32L7GT	8F	Octal	Htr.	25.0	0.3	117	117	2.25	0.8	H-W Rectifier Class A	A-C plate volts (RMS) = 117 100 100 —15.0 1800				D-C output = 75 ma 20.5 — 4.0 —				—	—	—	4.5K	0.77	9	25A7GT	
25AC5GT	T		6Q	Octal	Htr.	25.0	0.3	180	—	10	—	Class A 6AE5GT Driver	110	—	+15.0	3800	$I_{c1} =$	45.0	—	—	—	58	2K	2.0	10	10	25AC5GT	
													6AE5GT $R_g = 1.0$ meg				22	7.0	6AE5GT characteristics direct coupled to 25AC5GT									
25B5	T+T	25N6	6D	Octal	Htr.	25.0	0.3	—	—	—	—	Direct Coupled	input output	110 110	—	0	2300	—	7.0 45	—	—	—	—	—	—	—	25B5	
25B6G	P	25W6	7S	Octal	Htr.	25.0	0.3	—	—	—	—	Class A	105 200	105 135	—16.0 —23.0	4800 5000	—	48.0 62.0	—	2.0 1.8	—	—	—	1.7K 2.5K	2.4 7.1	—	25B6G	
25C6G	BP		7S	Octal	Htr.	25.0	0.3	200	135	12.5	1.75	Class A	135 200	135 135	—13.5 —14.0	7000 7100	13.5 14.0	58.0 61.0	60.0 66.0	3.5 2.2	11.5 9.0	—	—	2K 2.6K	3.6 6.0	10 10	25C6G	
25N6	T+T	25B5	7W	Octal	Htr.	25.0	0.3	—	Same as 25B5														25N6					
25W6GT	BP		7AC	Octal	Htr.	25.0	0.3	300	150	10.0	1.25	Class A	110 200	110 125	—7.5 180 \downarrow	8000 8000	7.5 8.5	49.0 46.0	50.0 47.0	4.0 2.2	10.8 8.5	—	—	2K 4K	2.1 3.8	10 10	25W6GT	
26A7	BP		8BU	Octal	Htr.	26.5	0.6	50	50	2	0.5	Class A Class AB, P-P	26.5 26.5	26.5 26.5	—4.5 —7.0	5700 —	4.5 14	20.0 19.0	20.5 30.0	1.9 2.0	5.5 8.5	—	—	1.5K 2.5K	0.2 0.5	7 5	26A7	

♦Cathode resistor in ohms.

§Grid-to-grid voltage in push-pull operation.

†Triode connected, screen tied to plate.

‡Plate-to-plate load in push-pull operation.

P-P Push-pull operation, two tubes or both sections of double unit tubes. Values for both tubes or sections.

*Class code: BP=Beam pentode, D+P=Diode and pentode. P=Pentode. T=Triode. T+T=Duotriode. TF=Tetrode. T+P=Triode and pentode.

TABLE VI. (continued) Audio Power Amplifiers

TYPE	DESCRIPTION				CONSTR		CATHODE				MAXIMUM RATINGS				SERVICE		AVERAGE CHARACTERISTICS AND TYPICAL OPERATION												TYPE
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & P/RS	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	TRANSCONDUCTANCE μmhos	PEAK SIGNAL VOLTS	PLATE MA. ZERO SIGNAL	SCREEN MA. MAX. SIGNAL	SCREEN MA. ZERO SIG.	TRIODE AMP. MAX. SIG.	LOAD RESISTANCE Ω	MAX. OUTPUT WATTS	DISTORTION %					
31	T		4D	Medium-4	Fil.	2.0	0.13	—	—	—	—	Class A	135 180	—	—22.5 —30.0	925 1050	—	8.0 12.3	—	—	—	3.8 3.8	7K 5.7K	.185 .375	—	31			
32L7GT	D † BP	25A7GT	8Z	Octal	Htr.	32.5	0.3	—	—	—	—	Class A H-W Rectifier	90	90 Plate volts = 125, RMS	—5.0	4800	—	27.0	—	2.0	—	—	2.6K	1.0	—	32L7GT			
33	P	950	5K	Medium-5	Htr.	2.0	0.26	180	180	—	—	Class A	135 180	135 180	—13.5 —18.0	1450 1700	—	14.5 22.0	—	3.0 5.0	—	70 90	7K 6K	0.7 1.4	7 7	33			
35A5	BP		6AA	Loctal	Htr.	35.0	0.15	200	117	8.5	1.0	Class A	110 200	110 110	7.5 —8.0	5800 5900	7.5 8.0	40.0 41.0	41.0 44.0	3.0 2.0	7.0 7.0	—	2.5K 4.5K	1.5 3.3	10 10	35A5			
38	P		5F	Small-5	Htr.	6.3	0.3	250	250	—	—	Class A	100 250	100 250	—9.0 —25.0	875 1200	—	7.0 22.0	—	1.2 3.8	—	120 120	15K 10K	0.27 2.5	8 8	38			
41	P	6K6GT	6B	Medium-6	Htr.	6.3	0.4	Same as 7B5												41									
42	P	6F6GT	6B	Medium-6	Htr.	6.3	0.7	Same as 6F6G												42									
43	P	25A6GT	6B	Medium-6	Htr.	25	0.3	Same as 25A6												43									

45	T		4D	Medium-4	Fil.	2.5	1.5	275	—	—	—	Class A		180	—	—31.5	2125	—	31.0	—	—	—	3.5	2.7K	0.825	45												
												Class AB, P-P		250	—	—50.0	2175	—	34.0	—	—	—	3.5	3.9K	1.6													
														275	—	—56.0	2050	—	36.0	—	—	—	3.5	4.6K	2.0													
														275	—	—68.0	—	—	28.0	138.0	—	—	—	3.2K	18.0		5											
45A	T		4D	Medium-4	Fil.	2.5	1.5	—	—	—	—	Class A		325	—	—68.0	2370	—	43.0	—	—	—	3.5	3.2K	3.0	—	45A											
46	TE		5C	Medium-5	Fil.	2.5	1.75	400	—	10	—	Class A		250	G ₂ to P	—33	2350	—	22.0	—	—	—	5.6	6.4K	1.25	—												
												Class B, P-P		300													G ₁ to G ₂	0	—	8.0	—	—	—	—	—	5.2K	16.0	
47	P	2A5	5B	Medium-5	Fil.	2.5	1.75	250	—	—	—	Class A		250	250	—16.5	2500	—	31.0	—	6.0	—	150	7K	2.7	6	47											
48	TE		6A	Medium-5	Htr.	30.0	0.4	—	—	—	—	Class A		95	95	—20.0	3900	—	52.0	—	12.0	—	15.6	1.5K	2.0	—												
														125													100	—22.5	3900	—	52.0	—	12.0	—	43	1.5K	3.0	
49	Duo grid T		5C	Medium-5	Fil.	2.0	0.12	—	—	—	—	Class A		135	G ₂ to P	—20.0	1125	—	6.0	—	—	—	—	4.7	11K	0.170	—											
												Class B, P-P		135														—	0	—	70	2.6	—	—	—	—	8K	2.3
														180														—	0	—	70	4.0	—	—	—	—	12K	3.5
50	T		4D	Medium-4	Fil.	7.5	1.25	—	—	—	—	Class A		300	—	—54.0	1900	—	35.0	—	—	—	—	3.8	4.6K	1.6	—											
														350														—	—63.0	2000	—	45.0	—	—	—	3.8	4.1K	2.4
														400														—	—70.0	2100	—	55.0	—	—	—	3.8	3.67K	3.4
														450														—	—84.0	2100	—	55.0	—	—	—	3.8	4.35K	4.6
50A5	BP	50B5	6AA	Loctal	Htr.	50.0	0.15	200	117	10	1.25	Class A		110	110	—7.5	—	7.5	49.0	50.0	4.0	11.0	—	2K	2.2	10	50A5											
														200	110	—8.0	—	8.0	50.0	55.0	1.5	6.0	—	3K	4.7	10												
50C6G	BP		7AC	Octal	Htr.	50.0	0.15	200	135	12.5	1.75	Class A		135	135	—13.5	7000	13.5	58.0	60.0	3.5	11.5	—	2K	3.6	10	50C6G											
														200	135	—14.0	7100	14.0	61.0	66.0	2.2	9.0	—	2.6K	6.0	10												

‡Cathode resistor in ohms.

§Grid-to-grid voltage in push-pull operation.

†Triode connected, screen tied to plate.

‡Plate-to-plate load in push-pull operation.

P-P Push-pull operation, two tubes or both sections of double tubes. Values for both tubes or sections.

*Class code: BP=Beam pentode. D+P=Diode and pentode. P=Pentode. T=Triode. T+I=Duotriode. TE=Tetrode. T+P=Triode and pentode.

TABLE VI. (continued) Audio Power Amplifiers

TYPE	DESCRIPTION		CONSTR.	CATHODE			MAX RATINGS			SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION											TYPE					
	CLASS*	NEAREST EQUIVALENT		BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	PLATE VOLTS		SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	TRANSCONDUCTANCE μmhos	PEAK SIGNAL VOLTS [§]	PLATE MA, ZERO SIGNAL	PLATE MA, MAX. SIGNAL		SCREEN MA, ZERO SIG.	SCREEN MA, MAX. SIG.	TRIODE AMP. FACTOR	LOAD RESISTANCE [¶]	MAX. OUTPUT WATTS
52	Duo grid T		5C	Medium-5	Fil.	6.3	0.3	300	—	5.5	—	Class A Class B, P-P	110 180	G ₂ to P G ₁ to G ₂	0 0	3000 —	— —	43.0 3.0	— —	— —	— —	5.2	2K 10K	1.5 5.0	— —	52	
53	T+T		7B	Medium-7	Htr.	2.5	2.0	300	—	5.5	—	Same as 6A6											53				
59	P	47 2A5	7A	Medium-7	Htr.	2.5	2.0	—	—	—	—	Class A Class B†	P250 300 400	250 G ₂ to G ₁ & G ₃ to P	—18.0 0 0	2500 — —	— — —	35.0 26.0 26.0	— — —	9.0 — —	— — —	— — —	6K 4.6K 6K	3.0 15.0 20.0	— — —	59	
68, A	P		5E	Medium-5	Htr.	6.3	0.4	—	—	—	—	Class A	135	90	—13.5	1400	—	14.0	—	3.0	—	—	7.5K	0.65	—	68, A	
70A7GT	D+BP	70L7GT	8AB	Octal	Htr.	70.0	0.15	—	—	—	—	Class A H-W Rectifier	110	110	—7.5	5800	—	40.0	—	3.0	—	—	2.5K	1.5	—	70A7GT	
70L7GT	D+BP	70A7GT	8AA	Octal	Htr.	70.0	0.15	117	117	5.0	1.0	Class A H-W Rectifier	110	110	—7.5	7500	—	40.0	—	3.0	—	—	2K	1.8	—	70L7GT	
71	T		4D	Medium-4	Fil.	5.0	0.25	—	—	—	—	Class A	180	—	—40.5	1700	—	20.0	—	—	—	3.0	4.8K	0.79	5	71	
71A	T		4D	Medium-4	Fil.	5.0	0.25	—	—	—	—	Class A	90 135 180	— — —	—16.5 —27.0 —40.5	1400 1650 1700	— — —	10.0 17.3 20.0	— — —	— — —	3.0 3.0 3.0	3K 3K 4.8K	0.125 0.4 0.79	5 5 5	71A		

71B	T		4D	Medium-4	Fil.	5.0	0.25	—	—	—	—	Same as 71A											71B			
79	T+T	6A6	6H	Small-6	Htr.	6.3	0.6	250	—	11.5	—	Class B, P-P	180 250	—	0 0	—	—	7.6 10.6	Pin = .38W Pin = .38W	7K 14K	5.5 8.0	—	79			
89/89Y	P		6F	Small-6	Htr.	6.3	0.4	250	250	—	—	Class A Class A Class B, P-P	250 250 180	— 250 —	—31.0 —25.0 0	1800 1800 —	— — —	32.0 32.0 6.0	G ₂ & G ₃ tied to P G ₃ to K G ₃ to P	4.7 125 —	5.5K 6.75K 9.4K	0.9 3.4 3.5	5 9 —	89/89Y		
95	P		6B	Medium-6	Htr.	2.5	1.75	—	—	—	—	Class A	315	315	—22.0	2300	—	42.0	—	8.0	—	—	7K	5.0	—	95
117L7/GT	D+BP	117N7GT 117P7GT	8A0	Octal	Htr.	117	0.09	117	117	6.0	1.0	Class A H-W Rectifier	105	105	—5.2	5300	5.2	43.0	43.0	4.0	5.5	—	4K	0.85	5	117L7/GT
117N7GT	D+BP	117P7GT	8AV	Octal	Htr.	117	0.09	117	117	5.5	1.0	Class A H-W Rectifier	100	100	—6.0	7000	6.0	51.0	—	5.0	—	—	3K	1.2	6	117N7GT
117P7GT	D+BP	117L7GT	8AV	Octal	Htr.	117	0.09	Same as 117L7/M7GT											117P7GT							
182B/482B	T	71A 183/483	4D	Medium-4	Fil.	5.0	1.25	—	—	—	—	Class A	250	—	—35.0	2000	—	20.0	—	—	—	5.0	4.5K	1.35	—	182B/482B
183/483	T		4D	Medium-4	Fil.	5.0	1.25	—	—	—	—	Class A	250	—	—65.0	1500	—	20.0	—	—	—	3.0	4.5K	1.8	—	183/483
210T	T	10	4D	Medium-4	Fil.	7.5	1.25	Same as 10											210T							
950	P	33	5K	Medium-5	Fil.	2.0	0.125	—	—	—	—	Class A	135	135	—16.5	1000	—	7.0	—	2.0	—	125	13.5K	0.575	—	950

♦Cathode resistor in ohms.

§Grid-to-grid voltage in push-pull operation.

†Triode connected, screen tied to plate.

‡Plate-to-plate load in push-pull operation.

P-P Push-pull operation, two tubes or both sections of double unit tubes. Values for both tubes or sections.

*Class code: BP=Beam pentode. D+P=Diode and pentode. P=Penode. T=Triode. T+T=Duotriode. TE=Tetrode. T+P=Triode and pentode.

TABLE VII.



TV DEFLECTION POWER AMPLIFIERS (Power Triodes, Tetrodes, and Pentodes)

TYPE	DESCRIPTION				CONSTR.	CATHODE		MAXIMUM RATINGS									SERVICE			AVERAGE CHARACTERISTICS AND TYPICAL OPERATION					TYPE		
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS		HTR./FIL.	VOLTS	AMPERES	PLATE SUPPLY VOLTS	PEAK POS. PLATE VOLTS*	PEAK NEG. PLATE VOLTS	SCREEN VOLTS	PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS	AVERAGE CATHODE MA	PEAK CATHODE MA	APPLICATION	PLATE VOLTS	SCREEN VOLTS	GRID VOLTS	TRANSCONDUCTANCE μMHOS	PLATE MA		SCREEN MA	PLATE RES., OHMS
6BD5GT	BP	6BQ6GTA	6CK	Octal	Htr.	6.3	0.9	325	4000	—	—200	325	10	3	100	300	Class A Amp. Horiz. Amp.	200 310	200 310	—12.0	5000	Cathode Current = 90 ma Peak surge $e_g = -50V$ peak $E_b = 2500V$			6BD5GT		
6BN7	T+T		9AJ	Min.-9	Htr.	6.3	0.75	400†	1500□	—	—50†	—	7.5□ 1.5■	—	—	—	Class A Amp. □ Class A Amp. ■ Vert. Amp. □ Vert. Osc. ■	250 120 360 360	— — — —	—15.0 —1.0 —15pk —	5500 2000	24 5.0 21 .2	— — — —	2200 14000	RK = 330 ohms	6BN7	
12A4	TE	12BH7 12AU7	9AG	Min.-9	Htr.	12.6 6.3	0.3 0.6	450 450	— 1000	— —	— —250	— —	6.0 5.9	— —	40 30	— 105	Class A Amp. Vert. Amp.	250 —	— —	—9.0	8000	12.5	—	—	2500	—	12A4

†Each section *Absolute Maximum

□Section 1

■Section 2

*T+T=Double Triode. TE=Tetrode. BP=Beam Pentode.

TABLE VIII.


CBS INDICATORS (Tuning Eyes)

TYPE	DESCRIPTION			CONSTR.	CATHODE			MAXIMUM RATINGS				AVERAGE CHARACTERISTICS AND TYPICAL OPERATION						TYPE	
	CLASS*	NEAREST EQUIVALENT	BASING		BASE & PINS	HTR./FIL.	VOLTS	AMPERES	TARGET VOLTS		ANODE VOLTS	SUPPLY VOLTS	TARGET VOLTS	ANODE MA (ZERO BIAS)	TARGET MA (ZERO BIAS)	SERIES ANODE RESISTOR, MEG.	GRID VOLTS (OPEN)		GRID VOLTS (CLOSED)
									MAXIMUM	MINIMUM									
2E5	T	2G5	6R	Small-6	Htr.	2.5	0.8	250	125	250	200 250	200 250	0.19† 0.24†	3.0† 4.0†	1.0 1.0	0 0	-6.5 -8.0	2E5	
2G5	T	2E5	6R	Small-6	Htr.	2.5	0.8	250	100	250	100' 200 250	100 200 250	0.19 0.19 0.24	1.0† 3.0† 4.0†	0.5 1.0 1.0	0 0 0	-8.0 -18.5 -22.0	2G5	
6AB5/6N5	T		6R	Small-6	Htr.	6.3	0.15	180	100	180	135	135	0.5†	2.0†	0.25	0	-10	6AB5/6N5	
6AD6G	T		7AG	Octal	Htr.	6.3	0.15	—	—	—	100 150	100 150	—	3.0† 3.0†	—	23 50	45 75	6AD6G	
6AF6G	T		7AG	Octal	Htr.	6.3	0.15	250	125	250	100 135 250	100 135 250	— — —	— — 2.2†	— — —	0 0 0	60 81 155	6AF6G	
6E5	T	6T5 6U5/6G5	6R	Small-6	Htr.	6.3	0.3	250	125	250	200 250	200 250	0.19 0.24	3.0† 4.0†	1.0 1.0	0 0	-6.5 -8.0	6E5	
6G5/6H5	T	6U5/6G5	6R	Small-6	Htr.	6.3	0.3	—	—	—	250 100	250 100	0.24 0.19	4.0 1.0	1.0 0.5	0 0	-22.0 -8.0	6G5/6H5	






















TABLE VIII.(continued) INDICATORS

TYPE	DESCRIPTION				CONST.		CATHODE		MAXIMUM RATINGS			AVERAGE CHARACTERISTICS AND TYPICAL OPERATION							
	CLASS*	NEAREST EQUIVALENT	BASING	BASE & PINS	HTR./FIL.	VOLTS	AMPERES	MAXIMUM	MINIMUM	CONTROL ELECTRODE VOLTS	SUPPLY VOLTS	TARGET VOLTS	TARGET VOLTS	ANODE MA (ZERO BIAS)	TARGET MA (ZERO BIAS)	SERIES ANODE RESISTOR, MEG.	GRID VOLTS (OPEN)	GRID VOLTS (CLOSED)	TYPE
6H5	T	6U5/6G5	6R	Small-6	Htr.	6.3	0.3						Same as 6G5/6H5						6H5
6T5	T	6U5/6G5	6R	Small-6	Htr.	6.3	0.3						Same as 6G5/6H5						6T5
6U5	T	6E5	6R	Small-6	Htr.	6.3	0.2						Same as 6G5 6H5						6U5






















*T=Triode.

†Subject to wide variations.






















BASING DIAGRAMS FOR SELDOM-USED TUBE REFERENCE GUIDE
























BASING DIAGRAMS FOR SELDOM-USED TUBE REFERENCE GUIDE
























BASING DIAGRAMS FOR SELDOM-USED TUBE REFERENCE GUIDE
























BASING DIAGRAMS FOR SELDOM-USED TUBE REFERENCE GUIDE









BASING DIAGRAMS FOR SELDOM-USED TUBE REFERENCE GUIDE



BASING DIAGRAMS FOR SELDOM-USED TUBE REFERENCE GUIDE



BASING DIAGRAMS FOR SELDOM-USED TUBE REFERENCE GUIDE





PICTURE TUBES


(Numerical-Alphabetical Order)

These tubes are selected for being in current demand. Other types can be found in the complete Picture Tube Reference Guide following this section.

CBS PICTURE TUBES




8DP4



RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 90° deflection . . . external conductive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Electrostatic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 85 degrees
 Vertical 68 degrees
 Diagonal 90 degrees

MAXIMUM RATINGS (Design center values)

	Grid Drive▲	Cathode Drive▲	
Anode voltage, d-c.	8000	8000	volts
Grid 4 voltage, d-c.	-500 to +500	-500 to +500	volts
Grid 2 voltage, d-c.		400	volts
Grid 1 voltage			
Negative bias, d-c.	100	0	volts
Positive bias, d-c.	0	100	volts
Negative peak	130	2	volts
Positive peak	2	130	volts
Peak heater-cathode voltage:			
Heater negative to cathode			
During warm-up time			
15 seconds max.	410	410	volts
After equipment warm-up period	180	180	volts
Heater positive to cathode	180	180	volts

TYPICAL OPERATING CONDITIONS

	Grid Drive▲	Cathode Drive▲	
Anode voltage	6000	6000	volts
Grid 4 (focusing electrode) voltage*	+15 to +315	+15 to +315	volts
Grid 2 voltage	150	150	volts
Grid 1 voltage for cutoff†	-13 to -35	14 to 30	volts
Ion-trap current‡, JETEC coil No. 117	31	31	ma
Ion-trap magnet strength‡	31	31	gausses

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 meg


NOTES:

- *With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes for a 5¼" x 7" raster.
- †Visual extinction of focused raster.
- ‡As measured with single-field beam bender.
- ▲Grid drive conditions measured with respect to cathode. Cathode drive conditions measured with respect to grid 1.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over: Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




10ABP4



RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . clear filter-glass faceplate . . . 90° deflection . . . external conductive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method Electrostatic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 85 degrees
 Diagonal 90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 12,000 volts
 Grid 4 (focusing electrode) voltage, d-c -500, +1000 volts
 Grid 2 voltage, d-c 500 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 140 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 180 volts
 Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 7500 volts
 Grid 4 (focusing electrode) voltage* 0 to 500 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff† -38 to -62 volts
 Ion-trap magnet strength‡, (approx.) 32 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes for a $8\frac{1}{4}'' \times 6\frac{1}{16}''$ raster.

†Visual extinction of focused raster.

‡Heppner Model No. E437.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.



10BP4A




ROUND PICTURE TUBE

Magnetic focus . . . spherical face
. . . gray filter-glass faceplate . . .
50° deflection . . . external con-
ductive coating

HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angle (approximate) 50 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 12,000 volts
 Grid 2 voltage, d-c 410 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 125 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 125 volts
 Heater positive to cathode 125 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 9000 volts
 Grid 2 voltage 250 volts
 Grid 1 voltage for cutoff -22 to 58 volts
 Focusing coil current, approx.* 110 ma
 Ion-trap current †, JETEC coil No. 108 120 ma
 Ion-trap magnet strength ‡, (approx.) 33 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil 106, or equivalent, 3.25" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 20 FL on a 6" x 8" area.


†Visual extinction of focused raster.

‡As measured with double-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




12LP4A



ROUND PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 54° deflection . . . external con-
 ductive coating**



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angle (approximate) 54 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c. 12,000 volts
 Grid 2 voltage, d-c. 410 volts
 Grid voltage, d-c.
 Negative bias value, d-c. 125 volts
 Positive bias value, d-c. 0 volts
 Positive peak value. 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period. 140 volts
 Heater positive to cathode. 140 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 11,000 volts
 Grid 2 voltage. 250 volts
 Grid 1 voltage for cutoff. -22 to -58 volts
 Focusing coil current, approx.*. 110 ma
 Ion-trap current \ddagger , JETEC coil No. 108. 120 ma
 Ion-trap magnet strength \ddagger , (approx.). 33 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance. 1.5 megohms

NOTES:

*For JETEC focus coil 106, or equivalent, 3.25" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 20 FL on a 7½" x 10" area.


†Visual extinction of focused raster.

‡As measured with double-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




14BP4



RECTANGULAR PICTURE TUBE

Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 70° deflection . . . external conductive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 65 degrees
 Vertical 50 degrees
 Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 14,000 volts
 Grid 2 voltage, d-c 410 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 125 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 125 volts
 Heater positive to cathode 125 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 11,000 volts
 Grid 2 voltage 250 volts
 Grid 1 voltage for cutoff -22 to -58 volts
 Focusing coil current, approx.* 110 ma
 Ion-trap current \ddagger , JETEC coil No. 111 120 ma
 Ion-trap magnet strength \ddagger , (approx.) 33 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil 106, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 20 FL on a $8\frac{1}{2}" \times 11\frac{1}{2}"$ area.


\ddagger Visual extinction of focused raster.

\ddagger As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




14CP4



RECTANGULAR PICTURE TUBE

Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 70° deflection . . . external conduc-
 tive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 65 degrees
 Vertical 50 degrees
 Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c. 14,000 volts
 Grid 2 voltage, d-c. 410 volts
 Grid 1 voltage, d-c.
 Negative bias value, d-c. 125 volts
 Positive bias value, d-c. 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 150 volts
 Heater positive to cathode 150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
 Grid 2 voltage 250 volts
 Grid 1 voltage for cutoff -22 to -58 volts
 Focusing coil current, approx.* 105 ma
 Ion-trap †, JETEC coil No. 111
 Ion-trap magnet strength ‡, (approx.) 32 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil 109, or equivalent, 3.0" from reference line with E_{c1} and E_{c1s} g adjusted for brightness of 35 FL on a $8\frac{3}{8}'' \times 11\frac{1}{2}''$ area.


†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




14QP4



RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 70° deflection . . . external conductive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method Electrostatic
Deflecting method Magnetic
Deflection angles (approximate)
Horizontal 65 degrees
Vertical 50 degrees
Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 11,000 volts
Grid 4 (focusing electrode) voltage, d-c -500, +1000 volts
Grid 2 voltage, d-c 500 volts
Grid 1 voltage, d-c
Negative bias value, d-c 180 volts
Positive bias value, d-c 0 volts
Positive peak value 2 volts
Peak heater-cathode voltage:
Heater negative to cathode
During warm-up period of 15 seconds max. 410 volts
After equipment warm-up period 180 volts
Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 9000 volts
Grid 4 (focusing electrode) voltage -50 to +250 volts
Grid 2 voltage 250 volts
Grid 1 voltage for cutoff† -24 to -64 volts
Ion-trap current‡, JETEC coil No. 117 24 ma
Ion-trap magnet strength‡, (approx.) 27 gauss

CIRCUIT VALUES

Grid 1 circuit resistance, maximum 1.5 megohms
Grid 2 circuit resistance, minimum■ 0.1 megohms
Focusing electrode circuit resistance, minimum■ 0.1 megohms

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes for a 8½" x 11½" raster.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

■Protective resistance is advisable to prevent tube damage. One resistor may be common to grids 2 and 4.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

14QP4A

SILVER VISION PICTURE TUBE

Type 14QP4A has an aluminized screen, otherwise it is identical to the 14QP4.

CBS PICTURE TUBES



14RP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 90° deflection . . . external conductive coating

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, ±10% 0.6 amperes



ELECTRICAL DATA

Focusing method Electrostatic
Deflecting method Magnetic
Deflection angles (approximate)
Horizontal 85 degrees
Vertical 68 degrees
Diagonal 90 degrees

MAXIMUM RATINGS

(Design center values)	Grid Drive Δ	Cathode Drive Δ	
Anode voltage, d-c	14,000	14,000	volts
Grid 4 voltage, d-c	-500 to +500	-500 to +500	volts
Grid 2 voltage, d-c	400	400	volts
Grid 1 voltage			
Negative bias, d-c	110	0	volts
Positive bias, d-c	0	110	volts
Negative peak	160	2	volts
Positive peak	2	160	volts
Peak heater-cathode voltage:			
Heater negative to cathode			
During warm-up time			
15 seconds max.	410	410	volts
After equipment warm-up period	180	180	volts
Heater positive to cathode	180	180	volts

TYPICAL OPERATING CONDITIONS

	Grid Drive Δ	Cathode Drive Δ	
Anode voltage	10,000	10,000	volts
Grid 4 (focusing electrode) voltage*	-50 to +350	-50 to +350	volts
Grid 2 voltage	300	300	volts
Grid 1 voltage for cutoff†	-26 to -70	26 to 59	volts
Ion-trap current‡, JETEC coil No. 117	36	36	ma
Ion-trap magnet strength‡	36	36	gausses

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 meg

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 8 1/4" x 11" raster.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

Δ Grid drive conditions measured with respect to cathode. Cathode drive conditions measured with respect to grid 1.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




16AP4A*



ROUND PICTURE TUBE

Magnetic focus . . . spherical face
. . . 53° deflection . . . metal-cone
envelope . . . gray filter-glass face-
plate



HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
Deflecting method Magnetic
Deflection angle (approximate) 53 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 14,000 volts
Grid 2 voltage, d-c 410 volts
Grid 1 voltage, d-c
 Negative bias value, d-c 125 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 140 volts
 Heater positive to cathode 140 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
Grid 2 voltage 300 volts
Grid 1 voltage for cutoff † -28 to -72 volts
Focusing coil current, approx.* 80 ma
Ion-trap current ‡, JETEC coil No. 108 99 ma
Ion-trap magnet strength ‡, (approx.) 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 30 FL on a 10" x 13 1/4" area.

†Visual extinction of focused raster.

‡As measured with double-field beam bender.

★Type 16AP4 has a clear glass faceplate.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.



16GP4




ROUND PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 70° deflection . . . metal-cone envelope**

HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, ±10% 0.6 amperes



ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angle (approximate) 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c. 14,000 volts
 Grid 2 voltage, d-c. 410 volts
 Grid 1 voltage, d-c.
 Negative bias value, d-c. 125 volts
 Positive bias value, d-c. 0 volts
 Positive peak value. 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period. 150 volts
 Heater positive to cathode. 150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff† -28 to -72 volts
 Focusing coil current, approx.* 100 ma
 Ion-trap current‡, JETEC coil No. 117 35 ma
 Ion-trap magnet strength‡, (approx.) 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 30 FL on a 10" x 13¼" area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.


16GP4B

Type 16GP4B has frosted gray filter-glass faceplate, otherwise it is identical to the 16GP4.

CBS PICTURE TUBES




16KP4



RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 70° deflection . . . external conduc-
 tive coating**



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 65 degrees
 Vertical 50 degrees
 Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 16,000 volts
 Grid 2 voltage, d-c 410 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 125 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 150 volts
 Heater positive to cathode 150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 14,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff † -28 to 72 volts
 Focusing coil current, approx.* 108 ma
 Ion-trap current ‡, JETEC coil No. 111 75 ma
 Ion-trap magnet strength ‡, (approx.) 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.0" from reference line with E_{c1} and E_{c2sig} adjusted for brightness of 35 FL on a $10\frac{1}{4}'' \times 13\frac{1}{2}''$ area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

16KP4A


SILVER VISION PICTURE TUBE

Type 16KP4A has an aluminized screen, otherwise it is identical to the 16KP4.

CBS PICTURE TUBES




16LP4A



ROUND PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 52° deflection . . . external con-
 ductive coating**



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angle (approximate) 52 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c. 16,000 volts
 Grid 2 voltage, d-c. 410 volts
 Grid 1 voltage, d-c.
 Negative bias value, d-c. 125 volts
 Positive bias value, d-c. 0 volts
 Positive peak value. 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period. 125 volts
 Heater positive to cathode. 125 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff†. -28 to -72 volts
 Focusing coil current, approx.*. 110 ma
 Ion-trap current‡, JETEC coil No. 108 120 ma
 Ion-trap magnet strength‡, (approx.) 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.25" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 20 FL on a $10\frac{1}{4}'' \times 14\frac{1}{2}''$ area.


†Visual extinction of focused raster.

‡As measured with double-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




16RP4



RECTANGULAR PICTURE TUBE

Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 70° deflection . . . external conduc-
 tive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method	Magnetic
Deflecting method	Magnetic
Deflection angles (approximately)	
Horizontal	65 degrees
Vertical	50 degrees
Diagonal	70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c	16,000 volts
Grid 2 voltage, d-c	410 volts
Grid 1 voltage, d-c	
Negative bias value, d-c	125 volts
Positive bias value, d-c	0 volts
Positive peak value	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period	150 volts
Heater positive to cathode	150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	12,000 volts
Grid 2 voltage	300 volts
Grid 1 voltage for cutoff†	-28 to -72 volts
Focusing coil current, approx.*	110 ma
Ion-trap current‡, JETEC coil No. 108	120 ma
Ion-trap magnet strength‡, (approx.)	35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance	1.5 megohms
-------------------------------------	-------------

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.5" from reference line with E_{c1} and E_{c1s1g} adjusted for brightness of 30 FL on a $10\frac{1}{4}$ " x $13\frac{1}{2}$ " area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

16RP4A


SILVER VISION PICTURE TUBE

Type 16RP4A has an aluminized screen, otherwise it is identical to the 16RP4.

CBS PICTURE TUBES




16TP4



RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 70° deflection . . . external con-
 ductive coating**



HEATER CHARACTERISTICS

Voltage..... 6.3 volts
 Current, ±10%..... 0.6 amperes

ELECTRICAL DATA

Focusing method.....	Magnetic
Deflecting method.....	Magnetic
Deflection angles (approximate)	
Horizontal.....	66 degrees
Vertical.....	50 degrees
Diagonal.....	70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c.....	14,000 volts
Grid 2 voltage, d-c.....	410 volts
Grid 1 voltage, d-c	
Negative bias value, d-c.....	125 volts
Positive bias value, d-c.....	0 volts
Positive peak value.....	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.....	410 volts
After equipment warm-up period.....	150 volts
Heater positive to cathode.....	150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage.....	12,000 volts
Grid 2 voltage.....	300 volts
Grid 1 voltage for cutoff.....	-28 to -72 volts
Focusing coil current, approx.*.....	99 ma
Ion-trap current‡, JETEC coil No. 111.....	75 ma
Ion-trap magnet strength‡, (approx.).....	35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance.....	1.5 megohms
--------------------------------	-------------

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.0" from reference line with E_{c1} and E_{c2} sig adjusted for brightness of 35 FL on a $13\frac{1}{2}'' \times 10\frac{1}{8}''$ area.


†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.



17ATP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 90° deflection . . . external conductive coating

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method	Electrostatic
Deflecting method	Magnetic
Deflection angles (approximate)	
Horizontal	80 degrees
Vertical	65 degrees
Diagonal	90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c	16,000 volts
Grid 4 (focusing electrode) voltage, d-c	-500, +1000 volts
Grid 2 voltage, d-c	500 volts
Grid 1 voltage, d-c	
Negative bias value, d-c	125 volts
Positive bias value, d-c	0 volts
Positive peak value	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period	180 volts
Heater positive to cathode	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	12,000 volts
Grid 4 (focusing electrode) voltage*	-50 to +265 volts
Grid 2 voltage	300 volts
Grid 1 voltage for cutoff†	-28 to -72 volts
Ion-trap magnet strength‡, (approx.)	34 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance	1.5 megohms
-------------------------------------	-------------

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 10 $\frac{1}{4}$ " x 14 $\frac{1}{4}$ " raster.
†Visual extinction of focused raster.
‡As measured with double-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

17ATP4A


SILVER VISION PICTURE TUBE

Type 17ATP4A has an aluminized screen, otherwise it is identical to the 17ATP4.

CBS PICTURE TUBES



17AVP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 90° deflection . . . external conductive coating

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, ±10% 0.6 amperes



ELECTRICAL DATA

Focusing method	Electrostatic
Deflecting method	Magnetic
Deflection angles (approximate)	
Horizontal	85 degrees
Vertical	68 degrees
Diagonal	90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c.	16,000 volts
Grid 4 (focusing electrode) voltage, d-c.	-500, +1000 volts
Grid 2 voltage, d-c.	500 volts
Grid 1 voltage, d-c.	
Negative bias value, d-c.	140 volts
Negative peak value	200 volts
Positive bias value, d-c.	0 volts
Positive peak value	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period	180 volts
Heater positive to cathode	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	12,000 volts
Grid 4 (focusing electrode) voltage*	-48 to +264 volts
Grid 2 voltage	300 volts
Grid 1 voltage for cutoff†	-28 to -72 volts
Ion-trap current‡, JETEC coil No. 117	30 ma
Ion-trap magnet strength‡, (approx.)	30 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 10¼" x 14¼" raster.
†Visual extinction of focused raster.
‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

17AVP4A


SILVER VISION PICTURE TUBE

Type 17AVP4A has an aluminized screen, otherwise it is identical to the 17AVP4.

CBS PICTURE TUBES




17BP4A



RECTANGULAR PICTURE TUBE

Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 70° deflection . . . external conductive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 65 degrees
 Vertical 50 degrees
 Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 16,000 volts
 Grid 2 voltage, d-c 410 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 125 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 150 volts
 Heater positive to cathode 150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
 Grid 2 voltage † 300 volts
 Grid 1 voltage for cutoff -28 to -72 volts
 Focusing coil current, approx.* 100 ma
 Ion-trap, JETEC coil No. 111
 Ion-trap magnet strength ‡, (approx.) 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c115g} adjusted for brightness of 30 FL on a 10¼" x 14¼" area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

17BP4B


SILVER VISION PICTURE TUBE

Type 17BP4B has an aluminized screen, otherwise it is identical to the 17BP4A.

CBS PICTURE TUBES



17CP4




RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray frosted filter-glass face-
 plate . . . 70° deflection . . . metal
 cone**

HEATER CHARACTERISTICS

Voltage..... 6.3 volts
 Current, ±10%..... 0.6 amperes



ELECTRICAL DATA

Focusing method..... Magnetic
 Deflecting method..... Magnetic
 Deflection angles (approximate)
 Horizontal..... 65 degrees
 Vertical..... 50 degrees
 Diagonal..... 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c..... 16,000 volts
 Grid 2 voltage, d-c..... 410 volts
 Grid 1 voltage, d-c.....
 Negative bias value, d-c..... 125 volts
 Positive bias value, d-c..... 0 volts
 Positive peak value..... 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max..... 410 volts
 After equipment warm-up period..... 180 volts
 Heater positive to cathode..... 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage..... 12,000 volts
 Grid 2 voltage..... 300 volts
 Grid 1 voltage for cutoff†..... -28 to -72 volts
 Focusing coil current, approx.*..... 96 ma
 Ion-trap current‡, JETEC coil No. 111..... 75 ma
 Ion-trap magnet strength‡, (approx.)..... 45 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance..... 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 30 FL on a $10\frac{1}{16}$ " x $14\frac{3}{8}$ " area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




17GP4



RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . frosted filter-glass faceplate . . . 70° deflection . . . metal cone



HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Electrostatic
Deflecting method Magnetic
Deflection angles (approximate)
Horizontal 66 degrees
Vertical 50 degrees
Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 16,000 volts
Grid 4 (focusing electrode) voltage, d-c 5,000 volts
Grid 2 voltage, d-c 500 volts
Grid 1 voltage, d-c
Negative bias value, d-c 125 volts
Positive bias value, d-c 0 volts
Positive peak value 2 volts
Peak heater-cathode voltage:
Heater negative to cathode
During warm-up period of 15 seconds max. 410 volts
After equipment warm-up period 180 volts
Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
Grid 4 (focusing electrode) voltage 2040 to 2760 volts
Grid 2 voltage 300 volts
Grid 1 voltage for cutoff † -28 to -72 volts
Ion-trap current ‡, JETEC coil No. 117 35 ma
Ion-trap magnet strength ‡, (approx.) 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms


NOTES:

†Visual extinction of focused raster.
‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




17HP4



RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 70° deflection . . . external conductive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method	Electrostatic
Deflecting method	Magnetic
Deflection angles (approximate)	
Horizontal	65 degrees
Vertical	50 degrees
Diagonal	70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c	16,000 volts
Grid 4 (focusing electrode) voltage, d-c	-500, +1000 volts
Grid 2, voltage, d-c	500 volts
Grid 1 voltage, d-c	
Negative bias value, d-c	125 volts
Positive bias value, d-c	0 volts
Positive peak value	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period	180 volts
Heater positive to cathode	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	14,000 volts
Grid 4 (focusing electrode) voltage*	-56 to +310 volts
Grid 2 voltage	300 volts
Grid 1 voltage for cutoff†	-28 to -72 volts
Ion-trap current‡, JETEC coil No. 117	37 ma
Ion-trap magnet strength‡, (approx.)	37 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

- *With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes for a 10¼" x 14¼" raster.
- †Visual extinction of focused raster.
- ‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

17HP4B

SILVER VISION PICTURE TUBE

Type 17HP4B has an aluminized screen, otherwise it is identical to the 17HP4.

CBS PICTURE TUBES




17JP4



RECTANGULAR PICTURE TUBE

Magnetic focus . . . spherical face
. . . gray filter-glass faceplate . . .
70° deflection . . . external con-
ductive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method	Magnetic
Deflecting method	Magnetic
Deflection angles (approximate)	
Horizontal	65 degrees
Vertical	50 degrees
Diagonal	70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c	18,000 volts
Grid 2 voltage, d-c	410 volts
Grid 1 voltage, d-c	
Negative bias value, d-c	140 volts
Negative peak value	200 volts
Positive bias value, d-c	0 volts
Positive peak value	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period	150 volts
Heater positive to cathode	150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	16,000 volts
Grid 2 voltage	300 volts
Grid 1 voltage for cutoff	-28 to -72 volts
Focusing coil current, approx.*	100 ma
Ion-trap current†, JETEC coil No. 111	82 ma
Ion-trap magnet strength‡, (approx.)	45 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1a1g} adjusted for brightness of 30 FL on a $10\frac{1}{4}'' \times 14\frac{1}{4}''$ area.


†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




17LP4



RECTANGULAR PICTURE TUBE

Electrostatic focus . . . cylindrical face . . . gray filter-glass faceplate . . . 70° deflection . . . external conductive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Electrostatic
Deflecting method Magnetic
Deflection angles (approximate)
Horizontal 65 degrees
Vertical 50 degrees
Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 16,000 volts
Grid 4 (focusing electrode) voltage, d-c -500, +1000 volts
Grid 2 voltage, d-c 500 volts
Grid 1 voltage, d-c
Negative bias value, d-c 140 volts
Negative peak value 200 volts
Positive bias value, d-c 0 volts
Positive peak value 2 volts
Peak heater-cathode voltage:
Heater negative to cathode
During warm-up period of 15 seconds max. 410 volts
After equipment warm-up period 180 volts
Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
Grid 4 (focusing electrode) voltage* -48 to +260 volts
Grid 2 voltage 300 volts
Grid 1 voltage for cutoff† -28 to -72 volts
Ion-trap current‡, JETEC coil No. 111 70 ma
Ion-trap magnet strength‡, (approx.) 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

- *With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes for a 10¼" x 14¼" raster.
- †Visual extinction of focused raster.
- ‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

17LP4A


SILVER VISION PICTURE TUBE

Type 17LP4A has an aluminized screen, otherwise it is identical to the 17LP4.

CBS PICTURE TUBES




17QP4



RECTANGULAR PICTURE TUBE

**Magnetic focus . . . cylindrical face
 . . . gray filter-glass faceplate . . .
 70° deflection . . . external conduc-
 tive coating**



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 65 degrees
 Vertical 50 degrees
 Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c. 16,000 volts
 Grid 2 voltage, d-c. 410 volts
 Grid 1 voltage, d-c.
 Negative bias value, d-c. 125 volts
 Positive bias value, d-c. 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 150 volts
 Heater positive to cathode 150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff† -28 to -72 volts
 Focusing coil current, approx.* 100 ma
 Ion-trap current‡, JETEC coil No. 111 70 ma
 Ion-trap magnet strength‡, (approx.) 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 30 FL on a 10¼" x 14¼" area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

17QP4A

SILVER VISION PICTURE TUBE

Type 17QP4A has an aluminized screen, otherwise it is identical to the 17QP4.

CBS PICTURE TUBES



17TP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . frosted filter-glass faceplate . . . 70° deflection . . . metal cone

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, ±10% 0.6 amperes



ELECTRICAL DATA

Focusing method	Electrostatic
Deflecting method	Magnetic
Deflection angles (approximate)	
Horizontal	65 degrees
Vertical	50 degrees
Diagonal	70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c.	16,000 volts
Grid 4 (focusing electrode) voltage, d-c.	-500, +1000 volts
Grid 2 voltage, d-c.	500 volts
Grid 1 voltage, d-c.	
Negative bias value, d-c.	125 volts
Positive bias value, d-c.	0 volts
Positive peak value	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period	180 volts
Heater positive to cathode	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	14,000 volts
Grid 4 (focusing electrode) voltage*	-55 to +300 volts
Grid 2 voltage	300 volts
Grid 1 voltage for cutoff†	-28 to -72 volts
Ion-trap current‡, JETEC coil No. 111	70 ma
Ion-trap magnet strength‡, (approx.)	45 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance	1.5 megohms
-------------------------------------	-------------

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes for a 11" x 14 1/4" raster.


†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




17YP4



RECTANGULAR PICTURE TUBE

Magnetic focus . . . cylindrical face
 . . . gray filter-glass faceplate . . .
 70° deflection . . . external conduc-
 tive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 65 degrees
 Vertical 50 degrees
 Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 18,000 volts
 Grid 2 voltage, d-c 500 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 140 volts
 Negative peak value 200 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 150 volts
 Heater positive to cathode 150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 16,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff † -28 to -72 volts
 Focusing coil current, approx.* 100 ma
 Ion-trap magnet strength ‡, (approx.) 45 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 20 FL on a 10¼" x 14¼" area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.



19AP4A




ROUND PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 66° deflection . . . metal cone**

HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angle (approximate) 66 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 16,000 volts
 Grid 2 voltage, d-c 410 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 125 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 150 volts
 Heater positive to cathode 150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff† -28 to -72 volts
 Focusing coil current, approx.* 140 ma
 Ion-trap current‡, JETEC coil No. 111 75 ma
 Ion-trap magnet strength‡, (approx.) 45 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 18 FL on a $11\frac{3}{4}'' \times 15\frac{3}{4}''$ area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.


CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

19AP4B

Type 19AP4B has frosted gray filter-glass faceplate, otherwise it is identical to the 19AP4A.



20CP4




RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 70° deflection**

HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 66 degrees
 Vertical 50 degrees
 Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 18,000 volts
 Grid 2 voltage, d-c 410 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 125 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 150 volts
 Heater positive to cathode 150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff -28 to -72 volts
 Focusing coil current, approx.* 100 ma
 Ion-trap current†, JETEC coil No. 117 36 ma
 Ion-trap magnet strength‡, (approx.) 36 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference, line with E_{c1} and E_{c1sig} adjusted for brightness of 30 FL on a $12\frac{1}{4}'' \times 17''$ area.


†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.



20CP4A




RECTANGULAR PICTURE TUBE

Type 20CP4A has an external conductive coating, otherwise it is identical to the 20CP4.

DIRECT INTERELECTRODE CAPACITANCES

External Conductive Coating* to Anode:	
Maximum.....	1500 $\mu\mu\text{f}$
Minimum.....	500 $\mu\mu\text{f}$



*Contains 2-inch x 2-inch contact area located 90° ccw from anode contact as viewed from base and $2\pm\frac{1}{4}$ inches above reference line.

20CP4B

SILVER VISION PICTURE TUBE

Type 20CP4B has an aluminized screen, otherwise it is identical to the 20CP4.


20CP4D

SILVER VISION PICTURE TUBE

Type 20CP4D has an aluminized screen and an external conductive coating, otherwise it is identical to the 20CP4.

DIRECT INTERELECTRODE CAPACITANCES

External Conductive Coating* to Anode:	
Maximum.....	1500 $\mu\mu\text{f}$
Minimum.....	500 $\mu\mu\text{f}$




*Contains 2-inch x 2-inch contact area located 90° ccw from anode contact as viewed from base and $2\pm\frac{1}{4}$ inches above reference line.

CBS PICTURE TUBES



20DP4




RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
. . . gray filter-glass faceplate . . .
70° deflection**

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method Magnetic
Deflecting method Magnetic
Deflection angles (approximate)
Horizontal 65 degrees
Vertical 50 degrees
Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 18,000 volts
Grid 2 voltage, d-c 410 volts
Grid 1 voltage, d-c
Negative bias value, d-c 125 volts
Positive bias value, d-c 0 volts
Positive peak value 2 volts
Peak heater-cathode voltage:
Heater negative to cathode
During warm-up period of 15 seconds max. 410 volts
After equipment warm-up period 150 volts
Heater positive to cathode 150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 12,000 volts
Grid 2 voltage 300 volts
Grid 1 voltage for cutoff † -28 to -72 volts
Focusing coil current, approx.* 95 ma
Ion-trap current ‡, JETEC coil No. 111 75 ma
Ion-trap magnet strength ‡, (approx.) 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms


NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1a1g} adjusted for brightness of 30 FL on a $12\frac{3}{4}$ " x 17" area.
†Visual extinction of focused raster.
‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.



20DP4A




RECTANGULAR PICTURE TUBE

Type 20DP4A has an external conductive coating, otherwise it is identical to the 20DP4.

DIRECT INTERELECTRODE CAPACITANCES

External Conductive Coating* to Anode:	
Maximum.....	1500 $\mu\mu\text{f}$
Minimum.....	500 $\mu\mu\text{f}$



*Contains 2-inch x 2-inch contact area located 90° ccw from anode contact as viewed from base and $2 \pm \frac{1}{4}$ inches above reference line.

20DP4B

SILVER VISION PICTURE TUBE

Type 20DP4B has an aluminized screen, otherwise it is identical to the 20DP4.


20DP4C

SILVER VISION PICTURE TUBE

Type 20DP4C has an aluminized screen and an external conductive coating, otherwise it is identical to the 20DP4.

DIRECT INTERELECTRODE CAPACITANCES

External Conductive Coating* to Anode:	
Maximum.....	1500 $\mu\mu\text{f}$
Minimum.....	500 $\mu\mu\text{f}$




*Contains 2-inch x 2-inch contact area located 90° ccw from anode contact as viewed from base and $2 \pm \frac{1}{4}$ inches above reference line.

CBS PICTURE TUBES



20HP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 70° deflection

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, ±10% 0.6 amperes



ELECTRICAL DATA

Focusing method Electrostatic
Deflecting method Magnetic
Deflection angles (approximate)
Horizontal 66 degrees
Vertical 50 degrees
Diagonal 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 16,000 volts
Grid 4 (focusing electrode) voltage, d-c -500, +1000 volts
Grid 2 voltage, d-c 500 volts
Grid 1 voltage, d-c
Negative bias value, d-c 125 volts
Positive bias value, d-c 0 volts
Positive peak value 2 volts
Peak heater-cathode voltage:
Heater negative to cathode
During warm-up period of 15 seconds max. 410 volts
After equipment warm-up period 180 volts
Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 14,000 volts
Grid 4 (focusing electrode) voltage* -56 to 310 volts
Grid 2 voltage 300 volts
Grid 1 voltage for cutoff† -28 to -72 volts
Ion-trap current‡, JETEC coil No. 111 85 ma

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 12¼" x 17" raster.


†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.



20HP4A




RECTANGULAR PICTURE TUBE

Type 20HP4A has an external conductive coating, otherwise it is identical to the 20HP4.

DIRECT INTERELECTRODE CAPACITANCES

External Conductive Coating* to Anode:
 Maximum..... 1500 $\mu\mu\text{f}$
 Minimum..... 500 $\mu\mu\text{f}$



*Contains 2-inch x 2-inch contact area located 90° ccw from anode contact as viewed from base and $2 \pm \frac{1}{4}$ inches above reference line.

20HP4C

SILVER VISION PICTURE TUBE

Type 20HP4C has an aluminized screen, otherwise it is identical to the 20HP4.


20HP4D

SILVER VISION PICTURE TUBE

Type 20HP4D has an aluminized screen and an external conductive coating, otherwise it is identical to the 20HP4.

DIRECT INTERELECTRODE CAPACITANCES

External Conductive Coating* to Anode:
 Maximum..... 1500 $\mu\mu\text{f}$
 Minimum..... 500 $\mu\mu\text{f}$




*Contains 2-inch x 2-inch contact area located 90° ccw from anode contact as viewed from base and $2 \pm \frac{1}{4}$ inches above reference line.

CBS PICTURE TUBES




21ACP4



RECTANGULAR PICTURE TUBE

Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 90° deflection . . . external conduc-
 tive coating



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 85 degrees
 Vertical 68 degrees
 Diagonal 90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c. 20,000 volts
 Grid 2 voltage, d-c. 500 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c. 140 volts
 Negative peak value 200 volts
 Positive bias value, d-c. 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 180 volts
 Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 16,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff -28 to -72 volts
 Focusing coil current, approx.* 117 ma
 Ion-trap current‡, JETEC coil No. 117 40 ma
 Ion-trap magnet strength‡, (approx.) 40 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 30 FL on a 15" x 19 1/8" area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

21ACP4A


SILVER VISION PICTURE TUBE

Type 21ACP4A has an aluminized screen, otherwise it is identical to the 21ACP4.

CBS PICTURE TUBES



21ALP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 90° deflection . . . external conductive coating

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method Electrostatic
Deflecting method Magnetic
Deflection angles (approximate)
Horizontal 85 degrees
Vertical 68 degrees
Diagonal 90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c. 18,000 volts
Grid 4 (focusing electrode) voltage, d-c. -500, +1000 volts
Grid 2 voltage, d-c. 500 volts
Grid 1 voltage, d-c.
Negative bias value, d-c. 140 volts
Negative peak value 200 volts
Positive bias value, d-c. 0 volts
Positive peak value 2 volts
Peak heater-cathode voltage:
Heater negative to cathode
During warm-up period of 15 seconds max. 410 volts
After equipment warm-up period 180 volts
Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 14,000 volts
Grid 4 (focusing electrode) voltage*. -55 to +300 volts
Grid 2 voltage 300 volts
Grid 1 voltage for cutoff†. -28 to -72 volts
Ion-trap magnet strength‡, (approx.). 40 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

- *With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 15" x 19 1/4" raster.
- †Visual extinction of focused raster.
- ‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

21ALP4A

SILVER VISION PICTURE TUBE

Type 21ALP4A has an aluminized screen, otherwise it is identical to the 21ALP4.

CBS PICTURE TUBES


21ALP4B

SILVER VISION PICTURE TUBE

Type 21ALP4B has Maximum Anode Voltage, d-c (Design Center Values) of 20,000 volts; otherwise it is identical to the 21ALP4A.




21AMP4



RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
. . . gray filter-glass faceplate . . .
90° deflection . . . external conductive coating**



HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
Deflecting method Magnetic
Deflection angles (approximate)
Horizontal 85 degrees
Vertical 68 degrees
Diagonal 90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 18,000 volts
Grid 2 voltage, d-c 500 volts
Grid 1 voltage, d-c
Negative bias value, d-c 140 volts
Negative peak value 200 volts
Positive bias value, d-c 0 volts
Positive peak value 2 volts
Peak heater-cathode voltage:
Heater negative to cathode
During warm-up period of 15 seconds max. 410 volts
After equipment warm-up period 180 volts
Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 16,000 volts
Grid 2 voltage 300 volts
Grid 1 voltage for cutoff† -28 to -72 volts
Focusing coil current, approx.* 100 ma
Ion-trap current‡, JETEC coil No. 111 95 ma
Ion-trap magnet strength‡, (approx.) 45 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1s} ig adjusted for brightness of 30 FL on a 15" x 19½" area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

CBS PICTURE TUBES

21AMP4A

SILVER VISION PICTURE TUBE

Type 21AMP4A has an aluminized screen, otherwise it is identical to the 21AMP4.



21AP4




RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
. . . frosted filter-glass faceplate
. . . metal cone . . . 70° deflection**

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method	Magnetic
Deflecting method	Magnetic
Deflection angles (approximate)	
Horizontal	66 degrees
Vertical	50 degrees
Diagonal	70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c	18,000 volts
Grid 2 voltage, d-c	500 volts
Grid 1 voltage, d-c	
Negative bias value, d-c	125 volts
Positive bias value, d-c	0 volts
Positive peak value	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period	180 volts
Heater positive to cathode	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	14,000 volts
Grid 2 voltage	300 volts
Grid 1 voltage for cutoff	-28 to -72 volts
Focusing coil current, approx.*	104 ma
Ion-trap current †, JETEC coil No. 111	90 ma
Ion-trap magnet strength ‡, (approx.)	45 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 30 FL on a 13 $\frac{1}{16}$ " x 18 $\frac{3}{8}$ " area.

†Visual extinction of focused raster.


‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

CBS PICTURE TUBES



21ATP4




RECTANGULAR PICTURE TUBE

Electrostatic focus... spherical face
... gray filter-glass faceplate ...
90° deflection ... external conductive coating ... aluminized screen

HEATER CHARACTERISTICS

Voltage..... 6.3 volts
 Current, ±10%..... 0.6 amperes



ELECTRICAL DATA

Focusing method..... Electrostatic
 Deflecting method..... Magnetic
 Deflection angles (approximate)
 Horizontal..... 85 degrees
 Vertical..... 68 degrees
 Diagonal..... 90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c..... 18,000 volts
 Grid 4 (focusing electrode) voltage, d-c..... -500, +1000 volts
 Grid 2 voltage, d-c..... 500 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c..... 140 volts
 Negative peak value..... 200 volts
 Positive bias value, d-c..... 0 volts
 Positive peak value..... 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max..... 410 volts
 After equipment warm-up period..... 180 volts
 Heater positive to cathode..... 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage..... 16,000 volts
 Grid 4 (focusing electrode) voltage*..... -64 to +350 volts
 Grid 2 voltage..... 300 volts
 Grid 1 voltage for cutoff†..... -28 to -72 volts
 Ion-trap magnet strength‡, (approx.)..... 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance..... 1.5 megohms

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 15" x 19¼" raster.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

21ATP4A


SILVER VISION PICTURE TUBE

Type 21ATP4A has Maximum Anode Voltage, d-c (Design Center Value) of 20,000 volts; otherwise it is identical to the 21ATP4.

CBS PICTURE TUBES



21AUP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 72° deflection . . . external conductive coating

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method	Electrostatic
Deflecting method	Magnetic
Deflection angles (approximate)	
Horizontal	67 degrees
Vertical	53 degrees
Diagonal	72 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c	18,000 volts
Grid 4 (focusing electrode) voltage, d-c	-500, +1000 volts
Grid 2 voltage, d-c	500 volts
Grid 1 voltage, d-c	
Negative bias value, d-c	140 volts
Negative peak value	200 volts
Positive bias value, d-c	0 volts
Positive peak value	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period	180 volts
Heater positive to cathode	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	14,000 volts
Grid 4 (focusing electrode) voltage*	-55 to +300 volts
Grid 2 voltage	300 volts
Grid 1 voltage for cutoff	-28 to -72 volts
Ion-trap current †, JETEC coil No. 117	40 ma
Ion-trap magnet strength ‡, (approx.)	40 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 15" x 19 1/4" raster.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

21AUP4A

SILVER VISION PICTURE TUBE

Type 21AUP4A has an aluminized screen, otherwise it is identical to the 21AUP4.

CBS PICTURE TUBES

21AUP4B

SILVER VISION PICTURE TUBE

Type 21AUP4B has a Maximum Anode Voltage, d-c (Design Center Value) of 20,000 volts; otherwise it is identical to the 21AUP4A.



21AVP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 72° deflection . . . external conductive coating

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method Electrostatic
Deflecting method Magnetic
Deflection angles (approximate)
Horizontal 67 degrees
Vertical 53 degrees
Diagonal 72 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 18,000 volts
Grid 4 (focusing electrode) voltage, d-c -500, +1000 volts
Grid 2 voltage, d-c 500 volts
Grid 1 voltage, d-c
Negative bias value, d-c 140 volts
Negative peak value 200 volts
Positive bias value, d-c 0 volts
Positive peak value 2 volts
Peak heater-cathode voltage:
Heater negative to cathode
During warm-up period of 15 seconds max. 410 volts
After equipment warm-up period 180 volts
Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 14,000 volts
Grid 4 (focusing electrode) voltage* -55 to +350 volts
Grid 2 voltage 300 volts
Grid 1 voltage for cutoff † -28 to -72 volts
Ion-trap current ‡, JETEC coil No. 117 40 ma
Ion-trap magnet strength ‡, (approx.) 40 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 15" x 19 1/2" raster.
†Visual extinction of focused raster.
‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

CBS PICTURE TUBES

21AVP4A

SILVER VISION PICTURE TUBE

Type 21AVP4A has an aluminized screen, otherwise it is identical to the 21AVP4.


21AVP4B

SILVER VISION PICTURE TUBE

Type 21AVP4B has a Maximum Anode Voltage, d-c (Design Center Value) of 20,000 volts, otherwise it is identical to the 21AVP4A.




21AWP4



RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
. . . gray filter-glass faceplate . . .
72° deflection . . . external conduc-
tive coating . . . aluminized screen**



HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
Deflecting method Magnetic
Deflection angles (approximate)
Horizontal 68 degrees
Vertical 53 degrees
Diagonal 72 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 18,000 volts
Grid 2 voltage, d-c 500 volts
Grid 1 voltage, d-c
Negative bias value, d-c 140 volts
Negative peak value 200 volts
Positive bias value, d-c 0 volts
Positive peak value 2 volts
Peak heater-cathode voltage:
Heater negative to cathode
During warm-up period of 15 seconds max. 410 volts
After equipment warm-up period 180 volts
Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 16,000 volts
Grid 2 voltage 300 volts
Grid 1 voltage for cutoff † -28 to -72 volts
Focusing coil current, approx.* 108 ma
Ion-trap current ‡, JETEC coil No. 117 40 ma
Ion-trap magnet strength ‡, (approx.) 40 gauss

CBS PICTURE TUBES

21AWP4 (cont.)

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance..... 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1s1g} adjusted for brightness of 20 FL on a 15" x 19 $\frac{1}{8}$ " area.


†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




21EP4A



RECTANGULAR PICTURE TUBE

**Magnetic focus . . . cylindrical face
. . . gray filter-glass faceplate . . .
70° deflection . . . external conductive coating**



HEATER CHARACTERISTICS

Voltage..... 6.3 volts
Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method..... Magnetic
Deflecting method..... Magnetic
Deflection angles (approximate)
Horizontal..... 65 degrees
Vertical..... 50 degrees
Diagonal..... 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c..... 18,000 volts
Grid 2 voltage, d-c..... 500 volts
Grid 1 voltage, d-c
Negative bias value, d-c..... 125 volts
Positive bias value, d-c..... 0 volts
Positive peak value..... 2 volts
Peak heater-cathode voltage:
Heater negative to cathode
During warm-up period of 15 seconds max..... 410 volts
After equipment warm-up period..... 150 volts
Heater positive to cathode..... 150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage..... 12,000 volts
Grid 2 voltage..... 300 volts
Grid 1 voltage for cutoff†..... -28 to -72 volts
Focusing coil current, approx.*..... 95 ma
Ion-trap current‡, JETEC coil No. 111..... 70 ma
Ion-trap magnet strength‡, (approx.)..... 35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance..... 1.5 megohms

CBS PICTURE TUBES

21EP4A (cont.)

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 30 FL on a $1\frac{3}{4}$ " x $1\frac{1}{4}$ " area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.


21EP4B

SILVER VISION PICTURE TUBE

Type 21EP4B has an aluminized screen, otherwise it is identical to the 21EP4A.



21FP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . cylindrical face . . . gray filter-glass faceplate . . . 70° deflection

HEATER CHARACTERISTICS

Voltage 6.3 volts
Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method	Electrostatic
Deflecting method	Magnetic
Deflection angles (approximate)	
Horizontal	65 degrees
Vertical	50 degrees
Diagonal	70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c.	18,000 volts
Grid 4 (focusing electrode) voltage, d-c.	-500, +1000 volts
Grid 2 voltage, d-c.	500 volts
Grid 1 voltage, d-c.	
Negative bias value, d-c.	125 volts
Positive bias value, d-c.	0 volts
Positive peak value.	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period.	150 volts
Heater positive to cathode.	150 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	14,000 volts
Grid 4 (focusing electrode) voltage.	-56 to +310 volts
Grid 2 voltage.	300 volts
Grid 1 voltage for cutoff.	-28 to -72 volts
Ion-trap beam bender†, JETEC coil No. 111	
Ion-trap magnet strength‡, (approx.).	35 gauss

CBS PICTURE TUBES

21FP4 (cont.)

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance..... 1.5 megohms

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a $12\frac{3}{4}'' \times 17''$ raster.

†Visual extinction of focused raster.

‡Single-field beam bender.


CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

21FP4A

Type 21FP4A has external conductive coating, otherwise it is identical to the 21FP4.

DIRECT INTERELECTRODE CAPACITANCES

External Conductive Coating* to Anode:
Maximum..... 750 μmf
Minimum..... 500 μmf



*Contains 2-inch x 2-inch contact area located 90° ccw from anode contact as viewed from base and 2 $\pm \frac{1}{4}$ inches above reference line.


21FP4C

SILVER VISION PICTURE TUBE

Type 21FP4C has an aluminized screen, otherwise it is identical to the 21FP4A.



21MP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . frosted filter-glass faceplate . . . 70° deflection . . . metal cone

HEATER CHARACTERISTICS

Voltage..... 6.3 volts
Current, $\pm 10\%$ 0.6 amperes



CBS PICTURE TUBES

21MP4 (cont.)

ELECTRICAL DATA

Focusing method.....	Electrostatic
Deflecting method.....	Magnetic
Deflection angles (approximate)	
Horizontal.....	66 degrees
Vertical.....	50 degrees
Diagonal.....	70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c.....	16,000 volts
Grid 4 (focusing electrode) voltage, d-c.....	-500, +1000 volts
Grid 2 voltage, d-c.....	500 volts
Grid 1 voltage, d-c	
Negative bias value, d-c.....	125 volts
Positive bias value, d-c.....	0 volts
Positive peak value.....	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.....	410 volts
After equipment warm-up period.....	180 volts
Heater positive to cathode.....	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage.....	14,000 volts
Grid 4 (focusing electrode) voltage.....	-55 to +300 volts
Grid 2 voltage.....	300 volts
Grid 1 voltage for cutoff†.....	-28 to -72 volts
Ion-trap current‡, JETEC coil No. 117.....	37 ma
Ion-trap magnet strength‡, (approx.).....	37 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance.....	1.5 megohms
--------------------------------	-------------

NOTES:


†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.



21WP4




RECTANGULAR PICTURE TUBE

Magnetic focus . . . spherical face
. . . gray filter-glass faceplate . . .
70° deflection . . . external conductive coating

HEATER CHARACTERISTICS

Voltage.....	6.3	volts
Current, ±10%.....	0.6	amperes



ELECTRICAL DATA

Focusing method.....	Magnetic
Deflecting method.....	Magnetic
Deflection angles (approximate)	
Horizontal.....	66 degrees
Vertical.....	50 degrees
Diagonal.....	70 degrees

CBS PICTURE TUBES

21WP4 (cont.)

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c.....	18,000 volts
Grid 2 voltage, d-c.....	500 volts
Grid 1 voltage, d-c.....	
Negative bias value, d-c.....	125 volts
Positive bias value, d-c.....	0 volts
Positive peak value.....	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.....	410 volts
After equipment warm-up period.....	180 volts
Heater positive to cathode.....	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage.....	16,000 volts
Grid 2 voltage.....	300 volts
Grid 1 voltage for cutoff.....	-28 to -72 volts
Focusing coil current, approx.*.....	100 ma
Ion-trap current‡, JETEC coil No. 117.....	35 ma
Ion-trap magnet strength‡, (approx.).....	35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance.....	1.5 megohms
--------------------------------	-------------

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.25" from reference line with E_{c1} and E_{c1s1g} adjusted for brightness of 30 FL on a 12¾" x 17" area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.


21WP4A

SILVER VISION PICTURE TUBE

Type 21WP4A has an aluminized screen, otherwise it is identical to the 21WP4.



21XP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 70° deflection . . . external conductive coating

HEATER CHARACTERISTICS

Voltage.....	6.3	volts
Current, ±10%.....	0.6	amperes



CBS PICTURE TUBES

21XP4 (cont.)

ELECTRICAL DATA

Focusing method	Electrostatic
Deflecting method	Magnetic
Deflection angles (approximate)	
Horizontal	66 degrees
Vertical	50 degrees
Diagonal	70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c	18,000 volts
Grid 4 (focusing electrode) voltage, d-c	-500, +1000 volts
Grid 2 voltage, d-c	500 volts
Grid 1 voltage, d-c	
Negative bias value, d-c	125 volts
Positive bias value, d-c	0 volts
Positive peak value	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period	180 volts
Heater positive to cathode	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	16,000 volts
Grid 4 (focusing electrode) voltage*	-64 to +352 volts
Grid 2 voltage	300 volts
Grid 1 voltage for cutoff†	-28 to -72 volts
Ion-trap current‡, JETEC coil No. 117	35 ma
Ion-trap magnet strength‡, (approx.)	35 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance	1.5 megohms
---------------------------	-------------

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 12¼" x 17" raster.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

21XP4A

SILVER VISION PICTURE TUBE

Type 21XP4A has an aluminized screen, otherwise it is identical to the 21XP4.



21YP4




RECTANGULAR PICTURE TUBE

Electrostatic focus . . . spherical face . . . gray filter-glass faceplate . . . 70° deflection . . . external conductive coating

HEATER CHARACTERISTICS

Voltage	6.3 volts
Current, ±10%	0.6 amperes



CBS PICTURE TUBES

21YP4 (cont.)

ELECTRICAL DATA

Focusing method.....	Electrostatic
Deflecting method.....	Magnetic
Deflection angles (approximate)	
Horizontal.....	65 degrees
Vertical.....	50 degrees
Diagonal.....	70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c.....	18,000 volts
Grid 4 (focusing electrode) voltage, d-c.....	-500, +1000 volts
Grid 2 voltage, d-c.....	500 volts
Grid 1 voltage, d-c.....	
Negative bias value, d-c.....	140 volts
Negative peak value.....	200 volts
Positive bias value, d-c.....	0 volts
Positive peak value.....	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.....	410 volts
After equipment warm-up period.....	180 volts
Heater positive to cathode.....	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage.....	14,000 volts
Grid 4 (focusing electrode) voltage*.....	-55 to +300 volts
Grid 2 voltage.....	300 volts
Grid 1 voltage for cutoff†.....	-28 to -72 volts
Ion-trap current‡, JETEC coil No. 117.....	40 ma
Ion-trap magnet strength‡, (approx.).....	40 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance.....	1.5 megohms
--------------------------------	-------------

NOTES:

*With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 14 $\frac{1}{16}$ " x 19 $\frac{1}{16}$ " raster.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.


21YP4A

SILVER VISION PICTURE TUBE

Type 21YP4A has an aluminized screen, otherwise it is identical to the 21YP4.



21ZP4A




RECTANGULAR PICTURE TUBE

Magnetic focus - - - spherical face
. . . gray filter-glass faceplate . . .
70° deflection . . . external con-
ductive coating

HEATER CHARACTERISTICS

Voltage..... 6.3 volts
 Current, ±10%..... 0.6 amperes



ELECTRICAL DATA

Focusing method..... Magnetic
 Deflecting method..... Magnetic
 Deflection angles (approximate)
 Horizontal..... 65 degrees
 Vertical..... 50 degrees
 Diagonal..... 70 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c..... 18,000 volts
 Grid 2 voltage, d-c..... 500 volts
 Grid 1 voltage, d-c.....
 Negative bias value, d-c..... 140 volts
 Negative peak value..... 200 volts
 Positive bias value, d-c..... 0 volts
 Positive peak value..... 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode.....
 During warm-up period of 15 seconds max..... 410 volts
 After equipment warm-up period..... 180 volts
 Heater positive to cathode..... 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage..... 16,000 volts
 Grid 2 voltage..... 300 volts
 Grid 1 voltage for cutoff..... -28 to -72 volts
 Focusing coil current, approx.*..... 100 ma
 Ion-trap current‡, JETEC coil No. 111..... 95 ma
 Ion-trap magnet strength‡, (approx.)..... 45 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance..... 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1s} adjusted for brightness of 30 FL on a $14\frac{1}{16}$ " x $19\frac{1}{16}$ " area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

21ZP4B


SILVER VISION PICTURE TUBE

Type 21ZP4B has an aluminized screen, otherwise it is identical to the 21ZP4A.

CBS PICTURE TUBES




24ADP4



RECTANGULAR PICTURE TUBE

Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 90° deflection . . . external conductive coating . . . aluminized screen



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 85 degrees
 Vertical 68 degrees
 Diagonal 90 degrees

MAXIMUM RATINGS (Absolute maximum values)

Anode voltage, d-c 24,200 volts
 Grid 2 voltage, d-c 660 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 155 volts
 Negative peak value 220 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 450 volts
 After equipment warm-up period 200 volts
 Heater positive to cathode 200 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 18,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff † -28 to -72 volts
 Focusing coil current, approx.* 125 ma
 Ion-trap current ‡, JETEC coil No. 117 32 ma
 Ion-trap magnet strength ‡, (approx.) 36 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms


NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 30 FL on a $16\frac{3}{8}'' \times 21\frac{1}{16}''$ area.
 †Visual extinction of focused raster.
 ‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




24CP4A



RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . . 90°
 deflection . . . external conductive
 coating . . . aluminized screen**



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, ±10% 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 85 degrees
 Vertical 68 degrees
 Diagonal 90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c. 20,000 volts
 Grid 2 voltage, d-c. 500 volts
 Grid 1 voltage, d-c.
 Negative bias value, d-c. 140 volts
 Negative peak value 200 volts
 Positive bias value, d-c. 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 180 volts
 Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 16,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff † -28 to -72 volts
 Focusing coil current, approx.* 105 ma
 Ion-trap current ‡, JETEC coil No. 111 85 ma

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 25 FL on a 16 $\frac{1}{8}$ " x 21 $\frac{1}{8}$ " area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




24DP4A



RECTANGULAR PICTURE TUBE

**Electrostatic focus...spherical face
 ... gray filter-glass faceplate ...
 90° deflection ... external conduc-
 tive coating ... aluminized screen**



HEATER CHARACTERISTICS

Voltage... 6.3 volts
 Current, ±10%... 0.6 amperes

ELECTRICAL DATA

Focusing method	Electrostatic
Deflecting method	Magnetic
Deflection angles (approximate)	
Horizontal	85 degrees
Vertical	68 degrees
Diagonal	90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c	20,000 volts
Grid 4 (focusing electrode) voltage, d-c	-500, +1000 volts
Grid 2 voltage, d-c	500 volts
Grid 1 voltage, d-c	
Negative bias value, d-c	140 volts
Negative peak value	200 volts
Positive bias value, d-c	0 volts
Positive peak value	2 volts
Peak heater-cathode voltage:	
Heater negative to cathode	
During warm-up period of 15 seconds max.	410 volts
After equipment warm-up period	180 volts
Heater positive to cathode	180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage	16,000 volts
Grid 4 (focusing electrode) voltage*	-64 to +350 volts
Grid 2 voltage	300 volts
Grid 1 voltage for cutoff	-28 to -72 volts
Ion-trap current‡, JETEC coil No. 117	33 ma
Ion-trap magnet strength‡, (approx.)	33 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance	1.5 megohms
---------------------------	-------------


NOTES:

- *With the combined Grid 1 bias voltage and video-signal voltage adjusted to give an anode current of 100 microamperes on a 16 1/8" x 21 1/8" raster.
- †Visual extinction of focused raster.
- ‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




24TP4



RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 90° deflection . . . external conduc-
 tive coating . . . aluminized screen**



HEATER CHARACTERISTICS

Voltage..... 6.3 volts
 Current, ±10%..... 0.6 amperes

ELECTRICAL DATA

Focusing method..... Magnetic
 Deflecting method..... Magnetic
 Deflection angles (approximate)
 Horizontal..... 85 degrees
 Vertical..... 68 degrees
 Diagonal..... 90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c..... 20,000 volts
 Grid 2 voltage, d-c..... 500 volts
 Grid 1 voltage, d-c.....
 Negative bias value, d-c..... 125 volts
 Positive bias value, d-c..... 0 volts
 Positive peak value..... 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max..... 410 volts
 After equipment warm-up period..... 180 volts
 Heater positive to cathode..... 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage..... 14,000 volts
 Grid 2 voltage..... 300 volts
 Grid 1 voltage for cutoff..... -28 to -72 volts
 Focusing coil current, approx.*..... 110 ma
 Ion-trap current †, JETEC coil No. 117..... 36 ma
 Ion-trap magnet strength ‡, (approx.)..... 36 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance..... 1.5 megohms

NOTES:

†Visual extinction of focused raster.
 ‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.




24VP4A



RECTANGULAR PICTURE TUBE

Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 90° deflection . . . external conduc-
 tive coating . . . aluminized screen



HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes

ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 85 degrees
 Vertical 68 degrees
 Diagonal 90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 22,000 volts
 Grid 2 voltage, d-c 600 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 165 volts
 Negative peak value 240 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 180 volts
 Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 20,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff -28 to -72 volts
 Focusing coil current, approx.* 125 ma
 Ion-trap current†, JETEC coil No. 111 135 ma
 Ion-trap magnet strength‡, (approx.) 40 gauss

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1sig} adjusted for brightness of 20 FL on a $16\frac{1}{16}$ " x $21\frac{1}{8}$ " area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

24YP4

SILVER VISION PICTURE TUBE

Type 24YP4 has an external conductive coating of 2000 to 2500 $\mu\mu$ f capacitance, otherwise it is identical to the 24DP4A.

CBS PICTURE TUBES



27EP4




RECTANGULAR PICTURE TUBE

**Magnetic focus . . . spherical face
 . . . gray filter-glass faceplate . . .
 90° deflection . . . aluminized screen**

HEATER CHARACTERISTICS

Voltage 6.3 volts
 Current, $\pm 10\%$ 0.6 amperes



ELECTRICAL DATA

Focusing method Magnetic
 Deflecting method Magnetic
 Deflection angles (approximate)
 Horizontal 85 degrees
 Vertical 68 degrees
 Diagonal 90 degrees

MAXIMUM RATINGS (Design center values)

Anode voltage, d-c 20,000 volts
 Grid 2 voltage, d-c 500 volts
 Grid 1 voltage, d-c
 Negative bias value, d-c 125 volts
 Positive bias value, d-c 0 volts
 Positive peak value 2 volts
 Peak heater-cathode voltage:
 Heater negative to cathode
 During warm-up period of 15 seconds max. 410 volts
 After equipment warm-up period 180 volts
 Heater positive to cathode 180 volts

TYPICAL OPERATING CONDITIONS

Anode voltage 16,000 volts
 Grid 2 voltage 300 volts
 Grid 1 voltage for cutoff -28 to -72 volts
 Focusing coil current, approx.* 105 ma
 Ion-trap current†, JETEC coil No. 111 85 ma

MAXIMUM CIRCUIT VALUE

Grid 1 circuit resistance 1.5 megohms

NOTES:

*For JETEC focus coil No. 109, or equivalent, 3.00" from reference line with E_{c1} and E_{c1s1g} adjusted for brightness of 20 FL on a $18\frac{1}{2}$ " x 24" area.

†Visual extinction of focused raster.

‡As measured with single-field beam bender.

CAUTION: Shielding for X-rays is recommended for personal protection at close range if this tube is operated in excess of 16,000 volts or over Maximum Rated Anode Voltage, whichever is less. Safety glass covering tube's faceplate is usually sufficient.

27RP4

SILVER VISION PICTURE TUBE

Type 27RP4 has external conductive coating, otherwise it is identical to the 27EP4. See type 24VP4A for basing.

DIRECT INTERELECTRODE CAPACITANCES

External Conductive Coating* to Anode:
 Maximum 750 $\mu\mu\text{f}$
 Minimum 500 $\mu\mu\text{f}$

*Contains 2-inch x 2-inch contact area located 90° ccw from anode contact as viewed from base and $2\pm\frac{1}{4}$ inches above reference line.

CBS PICTURE TUBES



PICTURE TUBE REFERENCE GUIDE

Contains all picture tubes for television,
including color picture tubes.

CBS PICTURE TUBES

TELEVISION PICTURE TUBES (Color Types)

TYPE	GENERAL DESCRIPTION										RATINGS†			TYPICAL OPERATION			TYPE
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLE§	FOCUSING	CONVERGENCE	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μF)	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS*	GRID 2 VOLTS	CONVERGENCE VOLTS*		
15GP22	C, S, Ro, A	Glass	45°	Electro.	Electro.	15GP22	26½	15¼	1500-3000	20,000	500	20,000	2400 to 3800	140 to 315	8500 to 10,200	15GP22	
15HP22	C, S, Ro, A	Glass	45°	Electro.	Electro.	15HP22	26½	15¼	1500-2500	20,000	500	20,000	3100	240	9300	15HP22	
19TP22	C, S, Ro, A	Glass	60°	Electro.	Electro.	19TP22	24¼	20-4/5	1500-3000	22,000	500	20,000	1950 to 3250	200	8500 to 10,200	19TP22	
19VP22	C, S, Ro, A	Glass	62°	Electro.	Magnetic	14W	26⅞	20⅞/32	1500-3000	27,000	500	25,000	6500 to 8000	150 to 330	—	19VP22	
21AXP22	C, S, Ro, A	Metal	70°	Electro.	Magnetic	14W	25⅞	21¼	—	25,000	800	25,000	3800 to 5300	140 to 310	—	21AXP22	
21AXP22A	C, S, Ro, A	Metal	70°	Electro.	Magnetic	14AH	25⅞	21¼	—	25,000	800	25,000	3800 to 5300	130 to 370	—	21AXP22A	

NOTES:

All tubes in this section contain three electron-beam sources with heater ratings of 6.3 volts and 1.8 amperes total current (heaters electrically paralleled within the tube). The screens of the tubes are of the tri-color (red, green, and blue), phosphor-dot type.

All tubes in this section are magnetically deflected.

Face-Plate Code: C—clear, G—gray, Ro—round, S—spherical.

†Design-center values.
*For each of the three electron-beam sources. † Does not include the dynamic convergence component.
‡ Horizontal deflection angle is given.



TELEVISION PICTURE TUBES (Monochrome Types)

TYPE	GENERAL DESCRIPTION											RATINGS†		TYPICAL OPERATION		TYPE
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μμF)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS		
3NP4	C, S, Ro, A	Glass	42°	Magnetic	5BV	10¾	2 ¹ / ₁₆	275-375	None	25,000	—	24,000	—	—	3NP4	
5ACP4	C, S, Ro, A	Glass	53°	Electro.	8EQ	11½	5½ ₃₂	No Coating	None	18,000	410	12,000	0	250	5ACP4	
5AXP4	C, S, Ro	Glass	53°	Auto-Electro.	12S	11	5½ ₃₂	No Coating	None	18,000	500	14,000	—	300	5AXP4	
5AZP4	C, S, Ro, A	Glass	50°	Electro.	12AA	12 ¹ / ₁₆	5½	No Coating	None	40,000	400	36,000	6650 to 8100	200	5AZP4	
5FP4A	C, S, Ro	Glass	53°	Magnetic	5AN	11½	5½ ₃₂	No Coating	None	8000	410	6,000	—	250	5FP4A	
5QP4	C, S, Ro, A	Glass	53°	Magnetic	5AN	11½	5½ ₃₂	No Coating	None	12,000	410	10,000	—	300	5QP4	
5QP4A	C, S, Ro, A	Glass	53°	Magnetic	5AN	11½	5½ ₃₂	No Coating	None	12,000	700	10,000	—	300	5QP4A	
5TP4	C, S, Ro, A	Glass	50°	Electro.	12C	12¾	5½	100-500	None	27,000	350	27,000	4900	200	5TP4	
7AP4	C, S, Ro	Glass	55°	Electro.	5AJ	13¾	7½	No Coating	None	3500	No Grid	3500	675	—	7AP4	
7CP4	C, S, Ro	Glass	57°	Electro.	8BQ	13 ¹ / ₁₆	7½	No Coating	None	8000	410	6000	1140	250	7CP4	

7DP4	C, S, Ro	Glass	50°	Electro.	12R	14 $\frac{1}{16}$	7 $\frac{1}{16}$	400-1500	Double	8000	410	6000	1200 to 1650	250	7DP4
7HP4	C, S, Ro	Glass	50°	Magnetic	12N	13 $\frac{3}{8}$	7 $\frac{1}{16}$	500	Double	8800	450	6000	—	250	7HP4
7NP4	C, S, Ro, A	Glass	35°	Electro.	14N	20 $\frac{1}{8}$	7 $\frac{1}{16}$	No Coating	None	80,000	600	75,000	15K to 17K	400-600	7NP4
7QP4	C, S, Ro	Glass	52°	Magnetic	12D	13 $\frac{1}{4}$	7 $\frac{1}{16}$	No Coating	Single	10,000	410	8000	—	300	7QP4
7RP4	C, S, Ro, A	Glass	50°	Magnetic	12D	14 $\frac{1}{16}$	7 $\frac{1}{16}$	No Coating	None	12,000	410	9000	—	250	7RP4
7TP4	C, S, Ro, A	Glass	50°	Electro.	12Q	13 $\frac{1}{2}$	7 $\frac{1}{16}$	No Coating	None	12,000	410	10,000	1170 to 1590	200	7TP4
7WP4	C, S, Ro, A	Glass	35°	Electro.	14N	20 $\frac{1}{16}$	7 $\frac{1}{16}$	Has Coating	None	80,000	600	75,000	15K to 17K	400-600	7WP4
8AP4	C, S, Ro	Metal	54°	Magnetic	12H	14 $\frac{3}{8}$	8 $\frac{1}{16}$	—	Single	9000	No Grid	7000	—	—	8AP4
8AP4A	G, S, Ro	Metal	54°	Magnetic	12H	14 $\frac{3}{8}$	8 $\frac{1}{16}$	—	Single	9000	No Grid	7000	—	—	8AP4A
8DP4	G, S, Re	Glass	85°	Electro.	12AB	10 $\frac{1}{4}$	6 $\frac{1}{8}$ x 7 $\frac{15}{16}$	250-350	Single	8,000	300	6,000	15 to 315	150	8DP4
8XP4	G, S, Re	Glass	85°	Self Electro.	12S	11 $\frac{1}{8}$	6 $\frac{1}{8}$ x 7 $\frac{15}{16}$	No Coating	None	22,000	550	16,000	—	300	8XP4
9AP4	C, S, Ro	Glass	40°	Electro.	6AL	21 $\frac{3}{8}$	9 $\frac{1}{8}$	No Coating	None	7000	250	7000	1190 to 1790	250	9AP4
9CP4	C, S, Ro	Glass	—	Magnetic	4AF	15 $\frac{1}{2}$	9	No Coating	None	7000	No Grid	7000	—	—	9CP4
10ABP4	C, S, Re	Glass	85°	Electro.	12L	11 $\frac{1}{8}$	7 $\frac{1}{8}$ x 9 $\frac{1}{8}$	400-850	Single	12,000	500	7500	0 to +500	300	10ABP4
10ABP4A	C, S, Re, A	Glass	85°	Electro.	12L	11 $\frac{1}{8}$	7 $\frac{1}{8}$ x 9 $\frac{1}{8}$	400-850	Single	12,000	500	7500	0 to +500	300	10ABP4A
10ABP4B	G, S, Re, A	Glass	85°	Electro.	12L	11 $\frac{1}{8}$	7 $\frac{1}{8}$ x 9 $\frac{1}{8}$	400-850	Single	12,000	500	7500	0 to +500	300	10ABP4B
10ABP4C	C, S, Re, A	Glass	85°	Electro.	12L	11 $\frac{1}{8}$	7 $\frac{1}{8}$ x 9 $\frac{1}{8}$	400-850	Single	12,000	500	7500	0 to +500	300	10ABP4C

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.

† Design-center values.

‡ Internal magnetic unit to be used with external tubular magnetic shield.

§ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION										RATINGS†			TYPICAL OPERATION	
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLE§	FOCUSING·	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER or HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μμf)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS*	GRID 2 VOLTS	TYPE
10ADP4★	G, S, Re	Glass	85°	Electro.	12L	11%	7% x 9%	400-850	Single	12,000	500	7500	0 to +500	300	10ADP4★
10AEP4★	C, S, Re, A	Glass	85°	Electro.	12L	11%	7% x 9%	400-850	Single	12,000	500	7500	0 to +500	300	10AEP4★
10BP4	C, S, Ro	Glass	50°	Magnetic	12N	18	10%	500-2500	Double	10,000	410	9000	—	250	10BP4
10BP4A	G, S, Ro	Glass	50°	Magnetic	12N	18	10%	500-2500	Double	10,000	410	9000	—	250	10BP4A
10BP4C	C, S, Ro, A	Glass	50°	Magnetic	12N	18	10%	500-2500	Single	10,000	410	9000	—	250	10BP4C
10BP4D	G, S, Ro, A	Glass	50°	Magnetic	12N	18	10%	500-2500	Single	10,000	410	9000	—	250	10BP4D
10CP4	C, S, Ro	Glass	50°	Magnetic	12N	17	10%	500	Double	12,000	450	9000	—	250	10CP4
10DP4	C, S, Ro, A	Glass	50°	Electro.	12M	18	10%	No Coating	None	10,000	410	9000	2900	250	10DP4
10EP4	C, S, Ro	Glass	50°	Magnetic	12N	18	10%	Has Coating	Double	12,000	410	8000	—	250	10EP4
10FP4	C, S, Ro, A	Glass	50°	Magnetic	12N	18	10%	500-2500	None	12,000	410	9000	—	250	10FP4

10FP4A	G, S, Ro, A	Glass	54°	Magnetic	12N	18	10%	500-2500	None	12,000	410	9000	—	250	10FP4A
10MP4	C, S, Ro	Glass	52°	Magnetic	12G	17½	10% ₁₆	500-2500	Double	10,000	No Grid	9000	—	—	10MP4
10MP4A	G, S, Ro	Glass	52°	Magnetic	12G	17½	10% ₁₆	500-2500	Double	10,000	No Grid	9000	—	—	10MP4A
10RP4	C, S, Ro, A	Glass	50°	Electro.	12L	16½	10%	750-1500	None	16,000	500	12,000 14,000	-48 to +260 -55 to +300	300 300	10RP4
10SP4	G, S, Ro, A	Glass	50°	Electro.	12M	17	10%	No Coating	None	20,000	410	12,000 14,000	1400 to 1900 1640 to 2225	200 200	10SP4
12AP4	C, S, Ro	Glass	40°	Electro.	6AL	25½	12% ₁₆	No Coating	None	7000	300	7000	1190 to 1790	250	12AP4
12CP4	C, S, Ro	Glass	—	Magnetic	4AF	18½	12% ₁₆	No Coating	None	7000	No Grid	7000	—	—	12CP4
12JP4	C, S, Ro	Glass	50°	Magnetic	12D	18	12% ₁₆	No Coating	None	12,000	410	10,000	—	250	12JP4
12KP4	C, S, Ro, A	Glass	54°	Magnetic	12N	18	12% ₁₆	500-2500	None	12,000	410	11,000	—	250	12KP4
12KP4A	G, S, Ro, A	Glass	54°	Magnetic	12N	18	12% ₁₆	500-2500	None	12,000	410	11,000	—	250	12KP4A
12LP4	C, S, Ro	Glass	54°	Magnetic	12N	19½	12½	750-3000	Double	12,000	410	11,000	—	250	12LP4
12LP4A	G, S, Ro	Glass	54°	Magnetic	12N	19½	12½	750-3000	Double	12,000	410	11,000	—	250	12LP4A
12LP4C	G, S, Ro, A	Glass	54°	Magnetic	12N	19½	12½	750-3000	Double	12,000	410	11,000	—	250	12LP4C
12QP4	C, S, Ro	Glass	55°	Magnetic	12D	17½	12% ₁₆	No Coating	Single	12,000	410	10,000	—	250	12QP4

All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical
T—treated, A—aluminized.

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

§ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION										RATINGS†			TYPICAL OPERATION	
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μmf)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS*	GRID 2 VOLTS	TYPE
12QP4A	G, S, Ro	Glass	55°	Magnetic	12D	17 $\frac{3}{8}$	12 $\frac{1}{16}$	No Coating	Single	12,000	410	10,000	—	250	12QP4A
12RP4	C, S, Ro	Glass	56°	Magnetic	12D	18	12 $\frac{1}{16}$	No Coating	Single	12,000	410	10,000	—	250	12RP4
12TP4	C, S, Ro	Glass	54°	Magnetic	12D	19 $\frac{1}{8}$	12 $\frac{1}{2}$	No Coating	Double	12,000	410	11,000	—	250	12TP4
12UP4	C, S, Ro	Metal	54°	Magnetic	12D	19	12 $\frac{1}{2}$	—	Double	12,000	410	11,000	—	250	12UP4
12UP4A	G, S, Ro	Metal	54°	Magnetic	12D	19	12 $\frac{1}{2}$	—	Double	12,000	410	11,000	—	250	12UP4A
12UP4B	G, T, S, Ro	Metal	54°	Magnetic	12D	19	12 $\frac{1}{2}$	—	Single	12,000	410	11,000	—	250	12UP4B
12VP4	C, S, Ro	Glass	55°	Magnetic	12G	18 $\frac{3}{8}$	12 $\frac{1}{2}$	750-3000	Double	12,000	No Grid	11,000	—	—	12VP4
12VP4A	G, S, Ro	Glass	55°	Magnetic	12G	18 $\frac{3}{8}$	12 $\frac{1}{2}$	750-3000	Double	12,000	No Grid	11,000	—	—	12VP4A
12WP4	G, S, Ro	Glass	55°	Magnetic	9CH	18	12 $\frac{1}{16}$	750-2000	Single	12,000	No Grid	10,000	—	—	12WP4
12XP4	G, S, Ro	Glass	55°	Magnetic	—	18 $\frac{1}{2}$	12 $\frac{1}{2}$	2000	Not Ind.	9000	350	8000	—	250	12XP4

12YP4	C, S, Ro	Glass	54°	Auto-Electro.	12N	19 $\frac{1}{8}$	12 $\frac{1}{2}$	750-3000	Single	12,000	410	11,000	—	250	12YP4
12ZP4	C, S, Ro, A	Glass	54°	Magnetic	12N	18	12 $\frac{9}{16}$	500-2000	Single	12,000	410	11,000	—	250	12ZP4
12ZP4A	G, S, Ro, A	Glass	54°	Magnetic	12N	18	12 $\frac{9}{16}$	500-2000	Single	12,000	410	11,000	—	250	12ZP4A
14ACP4	G, S, Re, A	Glass	85°	Electro.	12L	14 $\frac{1}{2}$	10 $\frac{1}{16}$ x 13 $\frac{3}{16}$	800-1200	Single	14,000	200	10,000	-50 to +350	125	14ACP4
14AEP4	G, S, Re, A	Glass	80°	Electro.	12L	13 $\frac{3}{16}$	10 $\frac{1}{16}$ x 13 $\frac{3}{16}$	800-1200	None	14,000	200	10,000	-50 to +350	110	14AEP4
14AJP4	G, S, Re, A	Glass	105°	Electro.	8HR	11 $\frac{13}{16}$	11 x 13 $\frac{3}{16}$	500-850	Single	11,000	500	9,000	-100 to +400	250	14AJP4
14ARP4	S, Re, A	Glass	85°	Electro.	12L	13 $\frac{1}{2}$	10 $\frac{1}{16}$ x 13 $\frac{3}{16}$	800-1200	None	14,000	70	10,000	-50 to +350	50	14ARP4
14ASP4	G, S, Re, A	Glass	105°	Electro.	8HR	11 $\frac{1}{8}$	11 x 13 $\frac{3}{16}$	500-850	None	14,000	500	12,000	-50 to +350	300	14ASP4
14BP4	G, S, Re	Glass	65°	Magnetic	12N	17 $\frac{3}{16}$	9 $\frac{3}{16}$ x 12 $\frac{1}{8}$	500-2000	Single	14,000	410	11,000	—	250	14BP4
14BP4A	G, T, S, Re	Glass	65°	Magnetic	12N	17 $\frac{3}{16}$	9 $\frac{3}{16}$ x 12 $\frac{1}{8}$	500-2000	Single	14,000	410	11,000	—	250	14BP4A
14CP4	G, S, Re	Glass	65°	Magnetic	12N	17 $\frac{1}{8}$	9 $\frac{27}{32}$ x 12 $\frac{21}{32}$	750-2000	Single	14,000	410	12,000	—	300	14CP4
14DP4	G, S, Re	Glass	65°	Magnetic	12D	17 $\frac{1}{8}$	9 $\frac{27}{32}$ x 12 $\frac{21}{32}$	No Coating	Double	14,000	410	11,000	—	250	14DP4
14EP4	G, S, Re	Glass	65°	Magnetic	12N	16 $\frac{1}{8}$	9 $\frac{27}{32}$ x 12 $\frac{21}{32}$	750-2000	Single	14,000	410	12,000	—	300	14EP4
14FP4	G, S, Re	Glass	65°	Magnetic	12D	16 $\frac{1}{2}$	9 $\frac{27}{32}$ x 12 $\frac{21}{32}$	No Coating	Single	14,000	410	—	—	—	14FP4
14GP4	F, G, S, Re	Glass	65°	Electro.	12L	17 $\frac{3}{16}$	9 $\frac{27}{32}$ x 12 $\frac{21}{32}$	750-2000	Single	14,000	500	12,000	2170 to 2940	300	14GP4

All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

‡ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION											RATINGS†		TYPICAL OPERATION		TYPE
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER or HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (pF)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS		
14HP4	G, S, Re	Glass	65°	Electro.	12L	17 ¹ / ₁₆	9 ¹ / ₁₆ x 12 ³ / ₁₆	750-2000	Single	14,000	410	12,000	-48 to +264	300	14HP4	
14KP4	C, S, Re	Glass	65°	Magnetic	12N	16 ² / ₃₂	9 ² / ₃₂ x 12 ² / ₃₂	500-2000	Single	10,000	380	9000	—	250	14KP4	
14KP4A	G, S, Re	Glass	65°	Magnetic	12N	16 ¹ / ₈	9 ² / ₃₂ x 12 ² / ₃₂	1200	Single	14,000	410	12,000	—	250	14KP4A	
14NP4	G, S, Re, A	Glass	80°	Electro.	12L	14 ¹ / ₂	10 ¹ / ₁₆ x 13 ³ / ₁₆	800-1200	Single	14,000	500	10,000	-50 to +350	250	14NP4	
14NP4A	G, S, Re, A	Glass	80°	Electro.	12L	14 ¹ / ₂	10 ¹ / ₁₆ x 13 ³ / ₁₆	800-1200	Single	14,000	500	10,000	-50 to +350	250	14NP4A	
14QP4	G, S, Re	Glass	65°	Electro.	12L	16 ¹ / ₃₂	9 ¹ / ₈ x 12 ¹ / ₁₆	600-1000	Single	11,000	500	9000	-50 to +250	250	14QP4	
14QP4A	G, S, Re, A	Glass	65°	Electro.	12L	16 ¹ / ₃₂	9 ¹ / ₈ x 12 ¹ / ₁₆	600-1000	Single	11,000	500	9000	-50 to +250	250	14QP4A	
14RP4	G, S, Re	Glass	85°	Electro.	12L	14 ¹ / ₂	10 ¹ / ₁₆ x 13 ³ / ₁₆	800-1200	Single	14,000	400	10,000	-50 to +350	300	14RP4	
14RP4A	G, S, Re, A	Glass	85°	Electro.	12L	14 ¹ / ₂	10 ¹ / ₁₆ x 13 ³ / ₁₆	800-1200	Single	14,000	400	10,000	-50 to +350	300	14RP4A	
14SP4	G, S, Re, A	Glass	79°	Electro.	12L	14 ¹ / ₁₆	10 ¹ / ₁₆ x 13 ³ / ₁₆	900-1200	Single	14,000	500	12,000	-48 to +264	300	14SP4	
14UP4	G, S, Re, A	Glass	65°	Magnetic	12D	17 ³ / ₃₂	9 ¹ / ₈ x 12 ¹ / ₁₆	No Coating	None	14,000	500	12,000	—	300	14UP4	
14WP4	G, S, Re, A	Glass	85°	Electro.	12L	13 ³ / ₁₆	10 ¹ / ₁₆ x 13 ³ / ₁₆	800-1200	None	14,000	500	12,000	-50 to +350	300	14WP4	

14XP4*	G, S, Re	Glass	79°	Electro.	12L	14½	10 ¹ / ₁₆ x 13 ³ / ₁₆	1100-1500	Single	15,000	400	12,000	-50 to +350	300	14XP4*
14XP4A*	G, S, Re, A	Glass	79°	Electro.	12L	14½	10 ¹ / ₁₆ x 13 ³ / ₁₆	1100-1500	Single	15,000	400	12,000	-50 to +350	300	14XP4A*
14ZP4	G, S, Re, A	Glass	85°	Electro.	12L	13 ³ / ₁₆	10 ¹ / ₁₆ x 13 ³ / ₁₆	800-1200	None	14,000	450	12,000	0 to +450	300	14ZP4
15AP4	C, S, Ro	Glass	52°	Magnetic	12D	20%	15%	No Coating	None	15,000	410	12,000	—	250	15AP4
15CP4	C, S, Ro	Glass	50°	Magnetic	12D	21%	15%	No Coating	Double	15,000	410	9000-15,000	—	250	15CP4
15DP4	C, S, Ro	Glass	57°	Magnetic	12D	20%	15%	No Coating	Single	15,000	410	13,000	—	250	15DP4
15EP4	C, S, Ro	Glass	52°	Magnetic	—	22%	15 ¹ / ₁₆	500-2000	Not Ind.	10,000	380	9000	—	250	15EP4
16AP4	C, S, Ro	Metal	53°	Magnetic	12D	22%	16	—	Double	14,000	410	9000-12,000	—	300	16AP4
16AP4A	G, S, Ro	Metal	53°	Magnetic	12D	22%	16	—	Double	14,000	410	12,000	—	300	16AP4A
16AP4B	G, F, S, Ro	Metal	53°	Magnetic	12D	22%	16	—	Double	14,000	410	12,000	—	300	16AP4B
16ABP4	G, S, Re	Glass	65°	Auto-Electro.	12N	19%	11 ¹ / ₄ x 14 ¹ / ₈	750-1500	Single	16,000	500	12,000-14,000	—	300	16ABP4
16ACP4	C, S, Ro	Glass	60°	Auto-Electro.	12N	21%	16	2000	Single	14,000	410	12,000-13,000	—	250	16ACP4
16AEP4	G, S, Re	Glass	65°	Electro.	12L	19%	11 ¹ / ₄ x 14 ¹ / ₈	750-1500	Single	16,000	410	12,000-14,000	-64 to +350	300	16AEP4
16AFP4	C, Cy, Re, A	Glass	65°	Electro.	12L	19 ³ / ₃₂	11 ¹ / ₂ x 14%	Has Coating	None	16,000	410	12,000	0	250	16AFP4
16CP4	C, S, Ro	Glass	52°	Magnetic	12D	21%	15 ¹ / ₁₆	No Coating	Double	15,000	410	12,000	—	250	16CP4

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

‡ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION											RATINGS†		TYPICAL OPERATION		
	FACE PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μF)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS	TYPE	
16DP4	C, S, Ro	Glass	60°	Magnetic	12D	21	16	No Coating	Double	15,000	410	9000-12,000	—	250	16DP4	
16DP4A	G, S, Ro	Glass	60°	Magnetic	12D	21	16	No Coating	Double	15,000	410	9000-12,000	—	250	16DP4A	
16EP4	C, S, Ro	Metal	60°	Magnetic	12D	20	16	—	Double	14,000	410	12,000	—	300	16EP4	
16EP4A	G, S, Ro	Metal	60°	Magnetic	12D	20	16	—	Double	14,000	410	12,000	—	300	16EP4A	
16EP4B	G, T, S, Ro	Metal	60°	Magnetic	12D	20	16	—	Single	14,000	410	12,000	—	300	16EP4B	
16FP4	C, S, Ro	Glass	62°	Magnetic	12D	20 $\frac{1}{8}$	16 $\frac{1}{8}$	No Coating	Single	16,000	410	12,000	—	300	16FP4	
16GP4	G, S, Ro	Metal	70°	Magnetic	12D	17 $\frac{1}{16}$	16	—	Single	14,000	410	12,000	—	300	16GP4	
16GP4A	C, S, Ro	Metal	70°	Magnetic	12D	17 $\frac{1}{16}$	16	—	Single	14,000	410	12,000	—	300	16GP4A	
16GP4B	G, F, S, Ro	Metal	70°	Magnetic	12D	17 $\frac{1}{16}$	16	—	Single	14,000	410	12,000	—	300	16GP4B	
16GP4C	C, F, S, Ro	Metal	70°	Magnetic	12D	17 $\frac{1}{16}$	16	—	Single	14,000	410	12,000	—	300	16GP4C	

16HP4	C, S, Ro	Glass	60°	Magnetic	12N	21%	16	1500-3500	Double	14,000	410	12,000	—	300	16HP4
16HP4A	G, S, Ro	Glass	60°	Magnetic	12N	21%	16	1500-3500	Double	14,000	410	12,000	—	300	16HP4A
16JP4	C, S, Ro	Glass	60°	Magnetic	12N	21%	16½	750-2000	Double	14,000	410	11,000	—	250	16JP4
16JP4A	G, S, Ro	Glass	60°	Magnetic	12N	21%	16½	750-2000	Double	14,000	410	11,000	—	250	16JP4A
16KP4	G, S, Re	Glass	65°	Magnetic	12N	19%	11½ x 14½	750-1500	Single	16,000	410	12,000-16,000	—	300	16KP4
16KP4A	G, S, Re, A	Glass	65°	Magnetic	12N	19%	11½ x 14½	750-1500	Single	16,000	410	14,000	—	300	16KP4A
16LP4	C, S, Ro	Glass	52°	Magnetic	12N	22%	16	1500-3500	Double	14,000	410	12,000	—	300	16LP4
16LP4A	G, S, Ro	Glass	52°	Magnetic	12N	22%	16	750-2000	Double	14,000	410	12,000-14,000	—	300	16LP4A
16MP4	C, S, Ro	Glass	60°	Magnetic	12N	22%	16½	1500-3500	Double	14,000	410	12,000	—	300	16MP4
16MP4A	G, S, Ro	Glass	60°	Magnetic	12N	22%	16½	1500-3500	Double	14,000	410	12,000	—	300	16MP4A
16QP4	G, S, Re	Glass	65°	Magnetic	12D	19%	11 ¹¹ / ₁₆ x 14 ¹³ / ₁₆	No Coating	Double	16,000	410	14,000	—	250	16QP4
16RP4	G, S, Re	Glass	65°	Magnetic	12N	19%	11½ x 14½	750-1500	Single	16,000	410	12,000-16,000	—	300	16RP4
16RP4A	G, S, Re, A	Glass	65°	Magnetic	12N	19%	11½ x 14½	750-1500	Single	16,000	410	12,000-16,000	—	300	16RP4A
16SP4	C, S, Ro	Glass	70°	Magnetic	12N	17 ¹¹ / ₁₆	16	1500-3500	Double	14,000	410	12,000	—	300	16SP4
16SP4A	G, S, Ro	Glass	70°	Magnetic	12N	17 ¹¹ / ₁₆	16	1500-3500	Double	14,000	400	12,000	—	300	16SP4A

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

§ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION										RATINGS†		TYPICAL OPERATION		
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μμf)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS*	GRID 2 VOLTS	TYPE
16TP4	G, S, Re	Glass	65°	Magnetic	12N	18½	11½ x 14½	750-2000	Single	14,000	410	12,000-14,000	—	300	16TP4
16UP4	G, S, Re	Glass	65°	Magnetic	12D	18½	11½ x 14½	No Coating	Single	15,000	410	12,000	—	300	16UP4
16VP4	G, S, Ro	Glass	70°	Magnetic	12D	17½	16	No Coating	Single	15,000	410	12,000	—	250	16VP4
16WP4	G, S, Ro	Glass	70°	Magnetic	12D	18½	16	No Coating	Double	15,000	410	12,000	—	250	16WP4
16WP4A	G, S, Ro	Glass	70°	Magnetic	12N	18½	16	750-1500	Double	16,000	410	12,000-16,000	—	250	16WP4A
16XP4	G, S, Re	Glass	65°	Magnetic	12D	19½	11½ x 14½	No Coating	Double	15,000	410	12,000	—	250	16XP4
16YP4	G, S, Re	Glass	70°	Magnetic	12N	17½	16	750-2000	Single	14,000	410	12,000	—	300	16YP4
16ZP4	G, S, Ro	Glass	52°	Magnetic	12N	22½	16	750-1500	Double	16,000	410	12,000	—	300	16ZP4
17AP4	G, S, Re	Glass	65°	Magnetic	12N	19	12½ x 15½	750-2000	Single	16,000	410	12,000	—	300	17AP4

17ASP4	C, S, Re	Glass	65°	Magnetic	12N	19%	12 $\frac{1}{2}$ x 15 $\frac{1}{2}$	1100	Single	14,000	410	12,000	—	250	17ASP4
17ATP4	G, S, Re	Glass	85°	Electro.	12L	16%	12 $\frac{1}{2}$ x 15 $\frac{1}{2}$	750-1500	Single	16,000	500	14,000 12,000	-55 to +300 -50 to +265	300 300	17ATP4
17ATP4A	G, S, Re, A	Glass	85°	Electro.	12L	16%	12 $\frac{1}{2}$ x 15 $\frac{1}{2}$	750-1500	Single	16,000	500	14,000 12,000	-55 to +300 -50 to +265	300 300	17ATP4A
17AVP4	G, S, Re	Glass	85°	Electro.	12L	16	12 $\frac{15}{32}$ x 15 $\frac{15}{16}$	1200-1500	Single	16,000	500	12,000	-48 to +264	300	17AVP4
17AVP4A	G, S, Re, A	Glass	85°	Electro.	12L	16	12 $\frac{15}{32}$ x 15 $\frac{15}{16}$	1200-1500	Single	16,000	500	12,000	-48 to +264	300	17AVP4A
17BP4	G, S, Re	Glass	65°	Magnetic	12D	19%	12 $\frac{1}{2}$ x 15 $\frac{1}{2}$	No Coating	Single	16,000	410	12,000	—	300	17BP4
17BP4A	G, S, Re	Glass	65°	Magnetic	12N	19%	12 $\frac{15}{32}$ x 15 $\frac{1}{2}$	750-1500	Single	16,000	410	12,000	—	300	17BP4A
17BP4B	G, S, Re, A	Glass	65°	Magnetic	12N	19%	12 $\frac{1}{2}$ x 15 $\frac{1}{2}$	750-1500	Single	16,000	410	14,000	—	250	17BP4B
17BP4C	G, T, S, Re	Glass	65°	Magnetic	12N	19%	12 $\frac{15}{32}$ x 15 $\frac{1}{2}$	750-1500	Single	16,000	410	12,000	—	300	17BP4C
17BJP4	G, S, Re, A	Glass	80°	Electro.	12L	14 $\frac{15}{16}$	12 $\frac{1}{2}$ x 15 $\frac{1}{2}$	1200-1500	None	16,000	500	14,000	-55 to +300	300	17BJP4
17BKP4*	G, S, Re	Glass	85°	Electro.	12L	16	12 $\frac{15}{16}$ x 15 $\frac{1}{2}$	1200-1500	Single	16,000	500	14,000	-56 to +310	300	17BKP4*
17BKP4A*	G, S, Re, A	Glass	85°	Electro.	12L	16	12 $\frac{15}{16}$ x 15 $\frac{1}{2}$	1200-1500	Single	16,000	500	14,000	-56 to +310	300	17BKP4A*
17BMP4	G, S, Re, A	Glass	80°	Electro.	12L	16	12 $\frac{1}{2}$ x 15 $\frac{1}{2}$	750-1500	Single	18,000	200	12,000	-50 to +265	110	17BMP4
17BNP4	G, S, Re, A	Glass	80°	Electro.	12L	15	12 $\frac{1}{2}$ x 15 $\frac{1}{2}$	750-1500	None	18,000	200	12,000	-50 to +350	110	17BNP4

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

‡ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION											RATINGS†		TYPICAL OPERATION		TYPE
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μμF)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS		
17BSP4*	G, S, Re, A	Glass	85°	Electro.	12L	14 $\frac{3}{8}$	12 $\frac{1}{2}$ ₃₂ x 15 $\frac{1}{2}$	1200-1500	None	16,000	500	14,000	-50 to +350	300	17BSP4*	
17BUP4	G, S, Re, A	Glass	85°	Electro.	12L	15 $\frac{3}{8}$	12 $\frac{1}{2}$ ₃₂ x 15 $\frac{1}{2}$	1200-1500	Single	20,000	500	12,000	-48 to +264	300	17BUP4	
17BVP4	G, S, Re, A	Glass	105°	Electro.	7FA	13 $\frac{3}{16}$	12.85 x 15.725	1000-1500	Single	17,600	550	14,000	-50 to +350	300	17BVP4	
17BZP4	G, S, Re, A	Glass	105°	Electro.	8HR	12 $\frac{1}{2}$ _{16}}	12 $\frac{1}{2}$ x 15 $\frac{1}{4}$	800-1500	None	16,000	500	14,000	0 to 400	300	17BZP4	
17CP4	G, F, S, Re	Metal	66°	Magnetic	12D	19	12 $\frac{1}{2}$ x 16 $\frac{1}{16}$	—	Single	16,000	410	12,000	—	300	17CP4	
17CP4A	G, S, Re	Metal	66°	Magnetic	12D	19	12 $\frac{1}{2}$ x 16 $\frac{1}{16}$	—	Single	16,000	410	12,000 14,000	—	300 300	17CP4A	
17CDP4*	G, S, Re, A	Glass	105°	Electro.	8HR	12 $\frac{1}{2}$ _{16}}	12 $\frac{1}{2}$ x 15 $\frac{1}{4}$	800-1500	None	16,000	500	14,000	0 to 400	300	17CDP4*	
17CEP4*	G, S, Re, A	Glass	85°	Electro.	12L	15 $\frac{3}{8}$	12 $\frac{1}{2}$ x 15 $\frac{1}{4}$	1200-1500	None	16,000	500	14,000	-50 to +350	300	17CEP4*	
17CFP4	G, S, Re, A	Glass	85°	Electro.	12L	15 $\frac{3}{8}$	12 $\frac{1}{2}$ x 15 $\frac{1}{4}$	1200-1500	None	16,000	500	14,000	-50 to +350	300	17CFP4	
17FP4	G, S, Re	Glass	65°	Electro.	12L	19 $\frac{3}{8}$	12 $\frac{1}{2}$ x 15 $\frac{1}{2}$	500-750	Single	18,000	410	12,000 16,000	2300 to 3100 3100 to 4100	300 300	17FP4	

17FP4A	G, S, Re	Glass	65°	Electro.	12L	19%	12½ x 15½	750-2000	Single	18,000	410	12,000	2300 to 3100	300	17FP4A
17GP4	G, F, S, Re	Metal	66°	Electro.	12M	19½%	12½ x 16½	—	Single	16,000	500	12,000	2290 to 3100	300	17GP4
17HP4	G, S, Re	Glass	65°	Electro.	12L	19½%	12½ x 15½	750-1500	Single	16,000	500	14,000-16,000	-56 to +310	300	17HP4
17HP4A	G, T, S, Re	Glass	65°	Electro.	12L	19½%	12½ ₃₂ x 15½	750-1500	Single	16,000	500	14,000-16,000	-56 to +310	300	17HP4A
17HP4B	G, S, Re, A	Glass	65°	Electro.	12L	19½%	12½ ₃₂ x 15½	750-1500	Single	16,000	500	14,000	-56 to +310	300	17HP4B
17JP4	G, S, Re	Glass	65°	Magnetic	12N	19%	12½ ₃₂ x 15½	500-750	Single	18,000	410	16,000	—	300	17JP4
17KP4	G, S, Re	Glass	65°	Auto-Electro.	12D	19%	12½ x 15½	1000-1500	Single	16,000	500	12,000	—	300	17KP4
17KP4A	G, S, Re, A	Glass	65°	Auto-Electro.	12D	19%	12½ x 15½	1000-1500	Single	16,000	500	12,000	—	300	17KP4A
17LP4	G, Cy, Re	Glass	65°	Electro.	12L	19½%	12½ x 15½	750-2000	Single	16,000	500	12,000	-48 to +260	300	17LP4
17LP4A	G, Cy, Re, A	Glass	65°	Electro.	12L	19½%	12½ x 15½	750-1500	Single	16,000	500	14,000	-56 to +310	300	17LP4A
17QP4	G, Cy, Re	Glass	65°	Magnetic	12N	19½%	12½ x 15½	750-2000	Single	16,000	410	12,000	—	300	17QP4
17QP4A	G, Cy, Re, A	Glass	65°	Magnetic	12N	19½%	12½ x 15½	750-1500	Single	18,000	500	14,000	—	300	17QP4A
17RP4	G, S, Re	Glass	66°	Electro.	12L	19%	12½ x 15½	750-1500	Single	16,000	500	14,000	-56 to +308	300	17RP4
17RP4C	G, S, Re, A	Glass	66°	Electro.	12L	19%	12½ x 15½	750-1500	Single	16,000	500	14,000	-56 to +308	300	17RP4C
17SP4	G, Cy, Re	Glass	66°	Auto-Electro.	12N	19½%	12½ x 15½	500-750	Single	14,000	410	12,000	—	250	17SP4

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

‡ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION											RATINGS†		TYPICAL OPERATION		TYPE
	FACE PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER or HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μμF)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS		
17TP4	G, F, S, Re	Metal	66°	Electro.	12M	19 ¹ / ₁₆	12 ³ / ₈ x 16 ¹ / ₁₆	—	Single	16,000	500	14,000 16,000	-55 to +300 -65 to +350	300 300	17TP4	
17UP4	G, Cy, Re	Glass	70°	Magnetic	12N	19 ¹ / ₁₆	12 ³ / ₈ x 15 ¹ / ₂	750-1500	Single	14,000	410	12,000	—	250	17UP4	
17VP4	G, Cy, Re	Glass	66°	Electro.	12L	19 ¹ / ₁₆	12 ¹ / ₃₂ x 15 ¹ / ₂	750-1500	Single	16,000	500	14,000	-56 to +310	300	17VP4	
17VP4B	G, Cy, Re, A	Glass	66°	Electro.	12L	19 ¹ / ₁₆	12 ¹ / ₃₂ x 15 ¹ / ₂	750-1500	Single	16,000	500	14,000	—	300	17VP4B	
17YP4	G, Cy, Re	Glass	65°	Magnetic	12N	19 ¹ / ₁₆	12 ¹ / ₃₂ x 15 ¹ / ₂	500-750	Single	18,000	500	16,000	—	300	17YP4	
19AP4	C, S, Ro	Metal	66°	Magnetic	12D	22	18 ³ / ₄	—	Single	16,000	410	12,000	—	300	19AP4	
19AP4A	G, S, Ro	Metal	66°	Magnetic	12D	22	18 ³ / ₄	—	Single	16,000	410	12,000	—	300	19AP4A	
19AP4B	G, F, S, Ro	Metal	66°	Magnetic	12D	22	18 ³ / ₄	—	Single	16,000	410	12,000	—	300	19AP4B	
19AP4C	G, S, Ro, A	Metal	66°	Magnetic	12D	22	18 ³ / ₄	—	Single	16,000	410	15,000	—	300	19AP4C	
19AP4D	C, F, S, Ro	Metal	66°	Magnetic	12D	22	18 ³ / ₄	—	Single	16,000	410	15,000	—	300	19AP4D	

19DP4	C, S, Ro	Glass	66°	Magnetic	12N	21 $\frac{1}{8}$	19	750 2000	Double	17,000	410	13,000	—	250	19DP4
19DP4A	G, S, Ro	Glass	66°	Magnetic	12N	21 $\frac{1}{8}$	19	750-2500	Double	17,000	410	13,000	—	250	19DP4A
19EP4	G, S, Re	Glass	65°	Magnetic	12D	21 $\frac{1}{2}$	13 $\frac{7}{32}$ x 17 $\frac{1}{4}$	No Coating	Single	19,000	410	13,000	—	250	19EP4
19FP4	G, S, Ro	Glass	66°	Magnetic	12D	22 $\frac{1}{2}$	19	No Coating	Double	19,000	410	13,000	—	250	19FP4
19GP4	G, S, Ro	Glass	66°	Magnetic	12D	21 $\frac{1}{4}$	19	No Coating	Single	19,000	410	13,000	—	250	19GP4
19JP4	G, S, Re	Glass	66°	Magnetic	12D	21 $\frac{3}{16}$	13 $\frac{3}{16}$ x 17 $\frac{3}{16}$	No Coating	Single	18,000	410	12,000	—	300	19JP4
19QP4	G, S, Re	Glass	66°	Electro.	12L	21 $\frac{1}{2}$	13 $\frac{3}{16}$ x 17 $\frac{3}{16}$	500-750	Single	18,000	410	12,000	-50 to +350	300	19QP4
20BP4	C, S, Ro	Glass	54°	Magnetic	12D	28 $\frac{3}{4}$	20 $\frac{3}{8}$	No Coating	None	16,500	750	10,000-15,000	—	250	20BP4
20CP4	G, S, Re	Glass	66°	Magnetic	12D	21 $\frac{13}{16}$	15 $\frac{1}{16}$ x 18 $\frac{13}{16}$	No Coating	Single	18,000	410	12,000	—	300	20CP4
20CP4A	G, S, Re	Glass	66°	Magnetic	12N	21 $\frac{13}{16}$	15 $\frac{1}{16}$ x 18 $\frac{13}{16}$	500-750	Single	18,000	410	12,000	—	300	20CP4A
20CP4B	G, S, Re, A	Glass	66°	Magnetic	12D	21 $\frac{13}{16}$	15 $\frac{1}{16}$ x 18 $\frac{13}{16}$	No Coating	Single	18,000	410	12,000	—	300	20CP4B
20CP4C	G, T, S, Re	Glass	66°	Magnetic	12D	21 $\frac{13}{16}$	15 $\frac{1}{16}$ x 18 $\frac{13}{16}$	No Coating	Single	18,000	410	14,000-18,000	—	300	20CP4C
20CP4D	G, S, Re, A	Glass	66°	Magnetic	12N	21 $\frac{13}{16}$	15 $\frac{1}{16}$ x 18 $\frac{13}{16}$	500-750	Single	18,000	410	12,000	—	300	20CP4D
20DP4	G, S, Re	Glass	65°	Magnetic	12D	21 $\frac{1}{4}$	15 $\frac{1}{16}$ x 18 $\frac{13}{16}$	No Coating	Single	18,000	410	12,000	—	300	20DP4
20DP4A	G, S, Re	Glass	65°	Magnetic	12N	21 $\frac{1}{4}$	15 $\frac{1}{16}$ x 18 $\frac{13}{16}$	500-750	Single	18,000	410	12,000	—	300	20DP4A

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

§ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION											RATINGS†		TYPICAL OPERATION		
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (pF)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS	TYPE	
20DP4B	G, S, Re, A	Glass	66°	Magnetic	12D	22½	15½ x 18½	No Coating	Single	18,000	410	16,000	—	300	20DP4B	
20DP4C	G, S, Re, A	Glass	66°	Magnetic	12N	22½	15½ x 18½	500-750	Single	18,000	410	16,000	—	300	20DP4C	
20FP4	G, S, Re	Glass	66°	Electro.	12M	22½	15½ ¹⁶ x 18 ¹³ ₁₆	No Coating	Single	18,000	410	12,000	2300 to 3200	300	20FP4	
20GP4	G, S, Re	Glass	66°	Electro.	12L	22½	15½ ¹⁶ x 18 ¹³ ₁₆	500-750	Single	18,000	500	14,000	2750 to 3740	300	20GP4	
20HP4	G, S, Re	Glass	66°	Electro.	12M	22½	15½ ¹⁶ x 18 ¹³ ₁₆	No Coating	Single	16,000	500	14,000	-56 to +310	300	20HP4	
20HP4A	G, S, Re	Glass	66°	Electro.	12L	22½	15½ ¹⁶ x 18 ¹³ ₁₆	750-1500	Single	16,000	500	14,000	-56 to +310	300	20HP4A	
20HP4B	G, T, S, Re	Glass	66°	Electro.	12M	22½	15½ ¹⁶ x 18 ¹³ ₁₆	No Coating	Single	16,000	500	14,000	-56 to +310	300	20HP4B	
20HP4C	G, S, Re, A	Glass	66°	Electro.	12M	22½	15½ x 18½	No Coating	Single	16,000	500	14,000	-56 to +310	300	20HP4C	
20HP4D	G, S, Re, A	Glass	66°	Electro.	12L	22½	15½ x 18½	570-1500	Single	16,000	500	14,000	-56 to +310	300	20HP4D	
20JP4	G, S, Re	Glass	65°	Auto-Electro.	12P	22½	15½ ¹⁶ x 18 ¹³ ₁₆	500-750	Single	18,000	500	12,000	—	300	20JP4	

20LP4	G, S, Re	Glass	66°	Electro.	12L	22½	15½ x 18½	750-1500	Single	16,000	500	14,000	0	300	20LP4
20MP4	G, S, Re	Glass	66°	Electro.	12L	22½	15½ x 18½	500-750	Single	16,000	500	14,000	-55 to +300	300	20MP4
21AP4	G, F, S, Re	Metal	66°	Magnetic	12D	22½	15½ x 19½	—	Single	18,000	500	14,000-18,000	—	300	21AP4
21ACP4	G, S, Re	Glass	85°	Magnetic	12N	20¾	16½ x 20¾	2000-2500	Single	20,000	500	16,000	—	300	21ACP4
21ACP4A	G, S, Re, A	Glass	85°	Magnetic	12N	20¾	16½ x 20¾	2000-2500	Single	20,000	500	16,000	—	300	21ACP4A
21AFP4	G, S, Re	Glass	65°	Electro.	12M	23¾	15½ x 20½	No Coating	Single	18,000	500	16,000	-64 to +350	300	21AFP4
21ALP4	G, S, Re	Glass	85°	Electro.	12L	20½	16½ x 20½	500-750	Single	18,000	500	14,000	-55 to +300	300	21ALP4
21ALP4A	G, S, Re, A	Glass	85°	Electro.	12L	20½	16½ x 20½	500-750	Single	18,000	500	14,000	-55 to +300	300	21ALP4A
21ALP4B	G, S, Re, A	Glass	85°	Electro.	12L	20½	16½ x 20½	500-750	Single	20,000	500	14,000	-55 to +300	300	21ALP4B
21AMP4	G, S, Re	Glass	85°	Magnetic	12N	20½	16½ x 20½	2000-2500	Single	18,000	500	16,000	—	300	21AMP4
21AMP4A	G, S, Re, A	Glass	85°	Magnetic	12N	20½	16½ x 20½	2000-2500	Single	18,000	500	16,000	—	300	21AMP4A
21AMP23A	G, S, Re, A	Glass	85°	Magnetic	12N	20½	16½ x 20¾	500-750	Single	18,000	500	16,000	—	300	21AMP23A
21ANP4	G, S, Re	Glass	85°	Electro.	12M	20½	16½ x 20½	No Coating	Single	18,000	500	14,000	-55 to +300	300	21ANP4
21ANP4A	G, S, Re, A	Glass	85°	Electro.	12M	20½	16½ x 20½	No Coating	Single	18,000	500	14,000	-55 to +300	300	21ANP4A
21AQP4	G, S, Re	Glass	85°	Magnetic	12D	20½	16½ x 20½	No Coating	Single	18,000	500	16,000	—	300	21AQP4

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.

† Design-center values.

‡ Internal magnetic unit to be used with external tubular magnetic shield.

§ For rectangular tubes the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION											RATINGS†		TYPICAL OPERATION		
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLE§	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μμF)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS	TYPE	
21AQP4A	G, S, Re, A	Glass	85°	Magnetic	12D	20 ⁷ / ₁₆	16 ¹ / ₁₆ x 20 ⁷ / ₁₆	No Coating	Single	18,000	500	16,000	—	300	21AQP4A	
21ARP4	G, S, Re	Glass	65°	Int. Magnetic¶	12N	23 ¹ / ₃₂	15 ¹ / ₁₆ x 20 ¹ / ₂	500-750	Internal	20,000	500	16,000	—	300	21ARP4	
21ARP4A	G, S, Re, A	Glass	65°	Int. Magnetic¶	12N	23 ¹ / ₃₂	15 ¹ / ₁₆ x 20 ¹ / ₂	500-750	None	20,000	500	16,000	—	300	21ARP4A	
21ASP4	G, S, Re	Glass	66°	Electro.	12M	22 ¹ / ₈	15 ¹ / ₁₆ x 18 ¹ / ₁₆	No Coating	Single	18,000	410	16,000	-64 to +352	300	21ASP4	
21ATP4	G, S, Re, A	Glass	85°	Electro.	12L	20 ¹ / ₂	16 ¹ / ₁₆ x 20 ⁷ / ₁₆	1200-1500	Single	18,000	500	16,000	-64 to +350	300	21ATP4	
21ATP4A	G, S, Re, A	Glass	85°	Electro.	12L	20 ¹ / ₂	16 ¹ / ₁₆ x 20 ⁷ / ₁₆	1200-1500	Single	20,000	500	16,000	-64 to +350	300	21ATP4A	
21ATP4B	G, S, Re	Glass	85°	Electro.	12L	20 ¹ / ₂	16 ¹ / ₁₆ x 20 ¹ / ₂	1200-1500	Single	18,000	500	16,000	-64 to +350	300	21ATP4B	
21AUP4	G, S, Re	Glass	67°	Electro.	12L	23 ¹ / ₃₂	16 ¹ / ₂ x 20 ¹ / ₂	2000-2500	Single	18,000	500	18,000	-72 to +396	300	21AUP4	
21AUP4A	G, S, Re, A	Glass	67°	Electro.	12L	23 ¹ / ₃₂	16 ¹ / ₂ x 20 ¹ / ₂	2000-2500	Single	18,000	500	18,000	-72 to +396	300	21AUP4A	
21AUP4B	G, S, Re, A	Glass	67°	Electro.	12L	23 ¹ / ₃₂	16 ¹ / ₂ x 20 ¹ / ₂	500-750	Single	20,000	500	18,000	-72 to +396	300	21AUP4B	

21AVP4	G, S, Re	Glass	67°	Electro.	12L	23 ¹³ / ₃₂	16½ x 20½	1200-1500	Single	18,000	500	18,000	-72 to +396	300	21AVP4
21AVP4A	G, S, Re, A	Glass	67°	Electro.	12L	23 ¹³ / ₃₂	16½ x 20½	1200-1500	Single	18,000	500	18,000	-72 to +396	300	21AVP4A
21AVP4B	G, S, Re, A	Glass	67°	Electro.	12L	23 ¹³ / ₃₂	16½ x 20½	1200-1500	Single	20,000	500	18,000	-72 to +396	300	21AVP4B
21AWP4	G, S, Re, A	Glass	67°	Magnetic	12N	23 ¹³ / ₃₂	16 ¹ / ₁₆ x 20 ⁷ / ₁₆	750-1500	Single	18,000	500	16,000	—	300	21AWP4
21AYP4	G, S, Re	Glass	66°	Electro.	12L	22 ³ / ₈	15 ¹ / ₁₆ x 18 ¹ / ₁₆	750-2000	Single	18,000	410	16,000	-64 to +352	300	21AYP4
21BAP4	G, S, Re	Glass	85°	Electro.	12L	20 ³ / ₈	16½ x 20½	2000-2500	None	20,000	500	16,000	0 to 500	300	21BAP4
21BCP4	G, S, Re, A	Glass	65°	Electro.	12L	23 ¹³ / ₃₂	15 ¹ / ₁₆ x 20½	500-750	None	20,000	500	16,000	+50 to +550	300	21BCP4
21BDP4	G, S, Re, A	Glass	67°	Electro.	12L	23 ¹³ / ₃₂	16½ x 20½	500-750	None	20,000	500	16,000	+50 to +550	300	21BDP4
21BNP4	G, S, Re, A	Glass	85°	Electro.	12L	20 ³ / ₈	16½ x 20½	2000-2500	None	20,000	500	16,000	0 to 500	300	21BNP4
21BSP4	G, S, Re, A	Glass	85°	Magnetic	12N	20 ³ / ₈	16½ x 20½	2000-2500	Single	20,000	500	16,000	—	300	21BSP4
21BTP4	G, S, Re, A	Glass	85°	Electro.	12L	20 ³ / ₈	16½ x 20½	2000-2500	Single	20,000	500	16,000	-64 to +352	300	21BTP4
21CBP4	G, S, Re, A	Glass	85°	Electro.	12L	18 ³ / ₈	16½ x 20½	2200-2900	None	18,000	500	14,000	-55 to +300	300	21CBP4
21CBP4A	G, S, Re, A	Glass	85°	Electro.	12L	18 ³ / ₈	16½ x 20½	2200-2900	None	20,000	500	16,000	0 to +450	300	21CBP4A
21CDP4*	G, S, Re	Glass	85°	Electro.	12L	20 ³ / ₈	16½ x 20½	2000-2500	Single	20,000	500	16,000	-64 to +352	300	21CDP4*
21CDP4A*	G, S, Re, A	Glass	85°	Electro.	12L	20 ³ / ₈	16½ x 20½	2000-2500	Single	20,000	500	16,000	-64 to +352	300	21CDP4A*

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

‡ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION										RATINGS†		TYPICAL OPERATION		
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μF)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS	TYPE
21CEP4	G, S, Re, A	Glass	106°	Electro.	8HR	14%	16½ x 20%	2000-2500	None	18,000	500	16,000	0 to +400	400	21CEP4
21CGP4	G, S, Re, A	Glass	85°	Electro.	12L	20%	16½ x 20%	2000-2500	Single	20,000	200	14,000	-55 to +300	110	21CGP4
21CHP4	G, S, Re, A	Glass	85°	Electro.	12L	18%	16½ x 21½	2000-2500	None	20,000	200	14,000	-50 to +350	110	21CHP4
21CKP4*	G, S, Re, A	Glass	85°	Electro.	12L	18%	16½ x 20%	2000-2500	None	20,000	500	16,000	-50 to +350	300	21CKP4*
21CVP4	G, S, Re, A	Glass	85°	Electro.	12L	20%	16½ x 20%	2000-2500	None	20,000	550	16,000	-64 to +352	300	21CVP4
21CWP4	G, S, Re, A	Glass	85°	Electro.	12L	20%	16½ x 20%	2000-2500	Single	22,000	550	16,000	-64 to +352	300	21CWP4
21DP4	G, F, S, Re	Metal	66°	Electro.	12M	22%	15 ⁷ / ₁₆ x 19 ⁷ / ₃₂	—	Single	18,000	500	14,000-18,000	2750 to 3740	300	21DP4
21EP4	G, Cy, Re	Glass	65°	Magnetic	12D	23%	15¾ x 20 ⁷ / ₁₆	No Coating	Single	18,000	500	16,000	—	300	21EP4
21EP4A	G, Cy, Re	Glass	65°	Magnetic	12N	23%	15¾ x 20 ⁷ / ₁₆	500-750	Single	18,000	500	16,000	—	300	21EP4A
21EP4B	G, Cy, Re, A	Glass	65°	Magnetic	12N	23%	15¾ x 20 ⁷ / ₁₆	500-750	Single	18,000	500	16,000	—	300	21EP4B

21FP4	G, Cy, Re	Glass	65°	Electro.	12M	23 $\frac{3}{8}$	15 $\frac{3}{8}$ x 20 $\frac{1}{16}$	No Coating	Single	18,000	500	14,000	-56 to +308	300	21FP4
21FP4A	G, Cy, Re	Glass	65°	Electro.	12L	23 $\frac{3}{8}$	15 $\frac{3}{8}$ x 20 $\frac{1}{16}$	500-750	Single	18,000	500	14,000	-56 to +308	300	21FP4A
21FP4C	G, Cy, Re, A	Glass	65°	Electro.	12L	23 $\frac{3}{8}$	15 $\frac{3}{8}$ x 20 $\frac{1}{16}$	500-750	Single	18,000	500	14,000	-56 to +310	300	21FP4C
21JP4	G, Cy, Re	Glass	67°	Int. Magnetic*	12N	23 $\frac{1}{2}$	15 $\frac{3}{8}$ x 20 $\frac{1}{16}$	500-750	Internal	20,000	500	14,000	—	300	21JP4
21JP4A	G, Cy, Re, A	Glass	67°	Int. Magnetic*	12N	23 $\frac{1}{2}$	15 $\frac{3}{8}$ x 20 $\frac{1}{16}$	500-750	Internal	20,000	500	14,000	—	300	21JP4A
21KP4	G, Cy, Re	Glass	65°	Auto-Electro.	12D	23 $\frac{3}{8}$	15 $\frac{1}{16}$ x 21 $\frac{1}{32}$	No Coating	Single	18,000	410	14,000	—	300	21KP4
21KP4A	G, Cy, Re	Glass	65°	Auto-Electro.	12P	23 $\frac{3}{8}$	15 $\frac{1}{16}$ x 20 $\frac{1}{8}$	500-750	Single	18,000	500	12,000	—	300	21KP4A
21MP4	G, F, S, Re	Metal	66°	Electro.	12M	22 $\frac{3}{8}$	15 $\frac{1}{16}$ x 19 $\frac{2}{32}$	—	Single	16,000	500	14,000-16,000	-55 to +300	300	21MP4
21WP4	G, S, Re	Glass	66°	Magnetic	12N	22 $\frac{3}{8}$	15 $\frac{1}{16}$ x 18 $\frac{3}{16}$	500-750	Single	18,000	500	16,000	—	300	21WP4
21WP4A	G, S, Re, A	Glass	66°	Magnetic	12N	22 $\frac{3}{16}$	15 $\frac{1}{16}$ x 18 $\frac{3}{16}$	500-750	Single	18,000	500	16,000	—	300	21WP4A
21XP4	G, S, Re	Glass	66°	Electro.	12L	22 $\frac{3}{16}$	15 $\frac{1}{16}$ x 18 $\frac{3}{16}$	2000-2500	Single	18,000	500	16,000	-64 to +352	300	21XP4
21XP4A	G, S, Re, A	Glass	66°	Electro.	12L	22 $\frac{3}{16}$	15 $\frac{1}{16}$ x 18 $\frac{3}{16}$	2000-2500	Single	18,000	500	16,000	-64 to +352	300	21XP4A
21YP4	G, S, Re	Glass	65°	Electro.	12L	23 $\frac{3}{8}$	15 $\frac{3}{8}$ x 20 $\frac{1}{16}$	500-750	Single	18,000	500	14,000 18,000	-55 to +300 -72 to +396	300 300	21YP4
21YP4A	G, S, Re, A	Glass	65°	Electro.	12L	23 $\frac{3}{8}$	15 $\frac{1}{16}$ x 20 $\frac{1}{8}$	500-750	Single	18,000	500	16,000	-64 to +350	300	21YP4A

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

‡ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION											RATINGS†		TYPICAL OPERATION		
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES§	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER, or HT. x WD. (IN.)	CAPACITANCE OF BULB COATING (μμF)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS	TYPE	
21ZP4	G, S, Re	Glass	65°	Magnetic	12D	23 ³ / ₃₂	15 ¹ / ₁₆ x 20 ¹ / ₁₆	No Coating	Single	18,000	500	12,000	—	300	21ZP4	
21ZP4A	G, S, Re	Glass	65°	Magnetic	12N	23 ³ / ₃₂	15 ¹ / ₁₆ x 20 ³ / ₁₆	500-750	Single	18,000	500	16,000	—	300	21ZP4A	
21ZP4B	G, S, Re, A	Glass	67°	Magnetic	12N	23 ¹³ / ₃₂	15 ¹ / ₁₆ x 20 ³ / ₁₆	500-750	Single	18,000	500	16,000	—	300	21ZP4B	
22AP4	C, S, Ro	Metal	70°	Magnetic	12D	23 ³ / ₃₂	21 ¹³ / ₁₆	—	Single	19,000	410	14,000	—	300	22AP4	
22AP4A	G, S, Ro	Metal	70°	Magnetic	12D	23 ³ / ₃₂	21 ¹³ / ₁₆	—	Single	19,000	410	14,000	—	300	22AP4A	
24AP4	G, S, Ro	Metal	70°	Magnetic	12D	24 ⁷ / ₁₆	24 ³ / ₁₆	—	Single	16,000	410	15,000	—	300	24AP4	
24AP4A	G, S, Ro, A	Metal	70°	Magnetic	12D	24 ⁷ / ₁₆	24 ³ / ₁₆	—	Single	16,000	410	15,000	—	300	24AP4A	
24AP4B	G, T, S, Ro	Metal	70°	Magnetic	12D	24 ⁷ / ₁₆	24 ³ / ₁₆	—	Single	16,000	410	15,000	—	300	24AP4B	
24ADP4	G, S, Re, A	Glass	85°	Magnetic	12N	21 ¹ / ₈	18 ⁷ / ₁₆ x 22 ¹ / ₁₆	2000-2500	Single	22,000	600	18,000	—	300	24ADP4	
24AHP4	G, S, Re, A	Glass	105°	Electro.	8HR	15 ¹³ / ₁₆	18 ³ / ₁₆ x 22 ¹³ / ₁₆	2000-2500	None	20,000	500	16,000	-50 to +350	300	24AHP4	

24BP4	G, S, Ro	Metal	70°	Electro.	12M	24 $\frac{3}{4}$	24 $\frac{3}{4}$	—	Single	16,000	500	14,000	-56 to +310	300	24BP4
24CP4	G, S, Re	Glass	85°	Magnetic	12N	21 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{1}{16}$	2000-2500	Single	20,000	500	18,000	—	300	24CP4
24CP4A	G, S, Re, A	Glass	85°	Magnetic	12N	21 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{1}{16}$	2000-2500	Single	20,000	500	16,000	—	300	24CP4A
24DP4	G, S, Re	Glass	85°	Electro.	12L	21 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{1}{16}$	2000-2500	Single	20,000	500	18,000	-72 to +400	300	24DP4
24DP4A	G, S, Re, A	Glass	85°	Electro.	12L	21 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{1}{16}$	2000-2500	Single	20,000	500	16,000	-64 to +350	300	24DP4A
24QP4	G, S, Re	Glass	85°	Magnetic	12N	21 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{1}{16}$	500-750	Single	18,000	500	16,000	—	300	24QP4
24TP4	G, S, Re, A	Glass	85°	Magnetic	12N	21 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{1}{16}$	250-750	Single	20,000	500	14,000	—	300	24TP4
24VP4	G, S, Re	Glass	87°	Magnetic	12N	21 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{5}{64}$	2000-2500	Single	22,000	600	20,000	—	300	24VP4
24VP4A	G, S, Re, A	Glass	87°	Magnetic	12N	21 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{5}{64}$	2000-2500	Single	22,000	600	20,000	—	300	24VP4A
24XP4	G, S, Re	Glass	85°	Magnetic	12D	21 $\frac{1}{2}$	18 $\frac{3}{8}$ x 22 $\frac{7}{8}$	No Coating	Single	20,000	500	18,000	—	300	24XP4
24YP4	G, S, Re, A	Glass	85°	Electro.	12L	21 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{1}{16}$	2000-2500	Single	20,000	500	16,000	-64 to +350	300	24YP4
24ZP4	G, S, Re, A	Glass	85°	Electro.	12L	21 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{5}{64}$	2000-2500	None	20,000	500	16,000	0 to 500	300	24ZP4
27AP4	G, T, S, Re	Metal	85°	Electro.	12M	22 $\frac{1}{16}$	20 $\frac{1}{16}$ x 25 $\frac{3}{8}$	—	Single	18,000	500	15,000	-60 to +300	300	27AP4
27EP4	G, S, Re, A	Glass	85°	Magnetic	12D	23 $\frac{1}{16}$	20 $\frac{1}{32}$ x 25 $\frac{1}{32}$	No Coating	Single	20,000	500	16,000	—	300	27EP4

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

‡ For rectangular tubes, the horizontal deflection angle is given.

* Has heater current of 0.45 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION										RATINGS†		TYPICAL OPERATION		
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLE§	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μμF)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS	TYPE
27GP4	G, S, Re	Glass	85°	Magnetic	12D	23 ⁷ / ₁₆	20 ⁷ / ₃₂ x 25 ⁹ / ₃₂	No Coating	Single	22,500	500	16,000	—	300	27GP4
27LP4	G, S, Re, A	Glass	85°	Magnetic	12N	24 ⁴ / ₁₆	20 ¹ / ₃₂ x 25 ¹ / ₃₂	250-400	Single	22,000	600	20,000	—	300	27LP4
27MP4	G, F, S, Re	Metal	85°	Magnetic	12D	22 ³ / ₁₆	20 ¹ / ₈ x 25 ⁷ / ₁₆	—	Single	18,000	500	16,000-18,000	—	300	27MP4
27NP4	G, S, Re	Glass	85°	Magnetic	12N	23 ³ / ₈	20 ¹ / ₃₂ x 25 ¹ / ₃₂	500-750	Single	18,000	500	16,000	—	300	27NP4
27RP4	G, S, Re, A	Glass	85°	Magnetic	12N	23 ³ / ₁₆	20 ¹ / ₃₂ x 25 ¹ / ₃₂	500-750	Single	20,000	500	16,000	—	300	27RP4
27SP4	G, S, Re, A	Glass	85°	Electro.	12L	23 ³ / ₁₆	20 ¹ / ₃₂ x 25 ¹ / ₃₂	500-750	Single	20,000	500	18,000	-72 to +396	300	27SP4
27UP4	G, S, Re	Glass	85°	Electro.	12L	23 ³ / ₁₆	20 ¹ / ₃₂ x 25 ¹ / ₃₂	500-750	Single	20,000	500	16,000	0 to 396	300	27UP4
30BP4	G, S, Ro	Metal	90°	Magnetic	12D	24 ¹ / ₁₆	30 ³ / ₈	—	Single	30,000	410	22,000	—	300	30BP4

NOTES: All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked *, indicating 0.45 ampere current. Only tubes that are magnetically deflected are included.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical, T—treated, A—aluminized.



















† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.










§ For rectangular tubes, the horizontal deflection angle is given.

*Ha= heater current of 0.45 ampere.

BASING DIAGRAMS FOR PICTURE TUBE REFERENCE GUIDE



BASING DIAGRAMS FOR PICTURE TUBE REFERENCE GUIDE





SEMICONDUCTORS

TRANSISTOR AND CRYSTAL DIODES

Contains all popular diodes for
television and industry:
germanium diodes, silicon diodes,
and silicon power rectifiers.

CBS SEMICONDUCTORS



GERMANIUM AND SILICON DIODES

Type	Outline Drawing	MAXIMUM RATINGS, 25°C ambient					ELECTRICAL CHARACTERISTICS, 25°C ambient					Description
		Peak Reverse Voltage	Operating Reverse Voltage	Forward Current, ma			Minimum Forward Current at +1V ma	Maximum Reverse Current				
				Average	Recurrent Peak	Surge 1 sec.		Volts	μa	Volts	μa	
1N34	A & B	75	60	40	150	500	5.0	-10	50	-50	500	General Purpose
1N34A	A & B	75	60	50	150	500	5.0	-10	30	-50	500	General Purpose
1N35°	*	75	60	50	150	500	7.5Δ	-10	10			Matched Pair
1N38/1N38A	A & B	120	100	50	150	500	4.0	-3	6	-100	500	High Reverse Voltage, JAN
1N39/1N39A	B	225	200	50	150	200	5.0	-100	200	-200	800	High Reverse Voltage
1N40°	D	75	60	40	150	500	12.75 at 1.5VΔ	-10	100	-50	850	Quad Demodulator
1N42°	D	125	100	50	150	500	12.75 at 1.5VΔ	-3	6	-100	625	Quad Demodulator
1N48	A & B	85	70	50	150	400	4.0	-50	833			General Purpose Detector
1N51	B	50	40	25	100	300	2.5	-50	1660			General Purpose
1N52	A & B	85	70	50	150	400	4.0	-50	150			General Purpose
1N54	A & B	50	35	40	150	500	5.0	-10	10			General Purpose
1N54A	A & B	75	50	50	150	500	5.0	-10	7	-50	60	General Purpose
1N55/1N55A	A & B	170	150	50	150	500	4.0	-100	300	-150	500	Gen. Purpose, High Reverse Voltage
1N55B	A & B	190	150	50	150	500	5.0	-150	500			Gen. Purpose, High Reverse Voltage
1N56/1N56A	A & B	50	40	60	200	1000	15.0	-30	300			High Conduction
1N58/1N58A	A & B	120	100	50	150	500	5.0	-100	600			High Reverse Voltage
1N60	A	30	25	50	150	500	3.0			-10	67	Video Detector
1N63	A & B	125	100	50	150	400	4.0	-50	50			General Purpose
1N64	A & B	20	15							-10	200	Video Detector
1N65	A & B	85	70	50	150	400	2.5	-50	200			General Purpose
1N67/1N67A	A & B	100	80	35	100	500	4.0	-5	5	-50	50	Gen. Purpose, High Reverse Resistance
1N68A	A	130	100	35	100	500	3.0	-100	625			Gen. Purpose, High Reverse Voltage
1N69	B	75	60	40	125	400	5.0	-10	30	-50	500	General Purpose, JAN
1N70	B	125	100	30	90	350	3.0	-10	25	-50	300	General Purpose, JAN
1N71°	D	50	40	60	200	1000	15.0Δ	-30	300			Quad, High Conductance Bridge Ckt.

1N73 ^o	D	75	60	22.5	60	100	15 at 1.3 to 1.7V Δ	-10	50			Quad, Bridge Circuit	
1N74 ^o	D	75	60	22.5	60	100	15 at 1.2 to 1.8V Δ	-10	50			Quad, Bridge Circuit	
1N75	A & B	125	100	50	150	400	2.5	-50	50			General Purpose	
1N81	B	50	40	30	90	350	3.0	-10	10			General Purpose, JAN	
1N82 \dagger	B & C		5		Designed for efficient low-noise mixer operation from 470 to 890 mc								Silicon — UHF Mixer
1N82A \dagger	B & C		5		Designed for efficient low-noise mixer operation from 470 to 890 mc								Silicon — UHF Mixer
1N90	A	75	60	40	150	500	5.0	-50	800			General Purpose	
1N111 $\#$	A	70	60	50	150	500	5.0	-10	25	-50	125	Computer	
1N112 $\#$	A	70	60	50	150	500	5.0	-10	50	-50	250	Computer	
1N113 $\#$	A	70	60	50	150	500	2.5	-10	25	-50	125	Computer	
1N114 $\#$	A	70	60	50	150	500	2.5	-10	50	-50	250	Computer	
1N115 $\#$	A	70	60	50	150	500	2.5	-10	100	-50	500	Computer	
1N116	A	75	60	30	-	-	5.0	-	-	-50	100	High Resistance, Gen. Purpose	
1N126	A	75	60	30	90	350	5.0	-10	50	-50	300	General Purpose, JAN	
1N127	A	125	100	30	90	300	3.0	-10	25	-50	200	General Purpose	
1N128	A	50	40	30	90	300	3.0	-10	10			General Purpose, JAN	
1N191 $\#$	A	105	70	50	150	500	5.0	-10	25	-10	125	Computer, Fast Recovery Time	
1N192 $\#$	A	55	80	50	150	500	5.0	-10	50	-10	250	Computer, Fast Recovery Time	
1N198 at 25 $^{\circ}$ C	A	100	80	30	90	300	4.0	-10	10	-50	40	High Temp., High Reverse Resistance	
1N198 at 75 $^{\circ}$ C	A	100	60	30	90	300	5.0	-10	75	-50	250	High Temp., High Reverse Resistance	
1N497	A	25	20	80	250		100	-20	20			Bonded Junction	
1N498	A	50	40	80	250		100	-40	25			Bonded Junction	
1N499	A	65	50	80	250		100	-50	30			Bonded Junction	
1N500	A	75	60	80	250		100	-60	40			Bonded Junction	
1N501	A	100	80	80	250		100	-80	40			Bonded Junction	
1N502	A	125	100	80	250		100	-100	40			Bonded Junction	
1N636	A	60	45	75 mw Dissipation			2.5	-10	10		Shunt Cap. 0.5 μ f	High Resistance, Gen. Purpose	

^oSpecial package

\dagger Units are tested for noise figure in instruments designed to correlate with customer applications.

$\#$ Characteristics are for each diode.

$\#$ Reverse characteristics measured at 55 $^{\circ}$ C.

Δ Matching 1N35 — Current at +1.0V matched within 10%


1N40, 1N42 — Resistance of diodes in each pair matched within 3 Ω at +1.5V.

1N71 — Current of all four diodes matched within 1ma at +1.0V.

1N73 — Resistance of diodes in each pair matched within 2 Ω at +15.0 ma d-c.


1N74 — Resistance of diodes in each pair matched within 6.7 Ω at +15.0 ma d-c.

PHYSICAL TYPES AVAILABLE FOR GERMANIUM AND SILICON DIODES

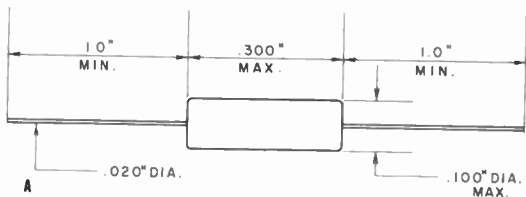


**GLASS-ENCASED
DIODE ***


*RETMA standard color coded for identification. Three bands reading from cathode end indicate the numbers after the prefix "1N"; e.g., 1N497. (UHF silicon diodes excepted; the cathode is the crystal, the anode is the whisker.) A fourth band is the manufacturing date code.

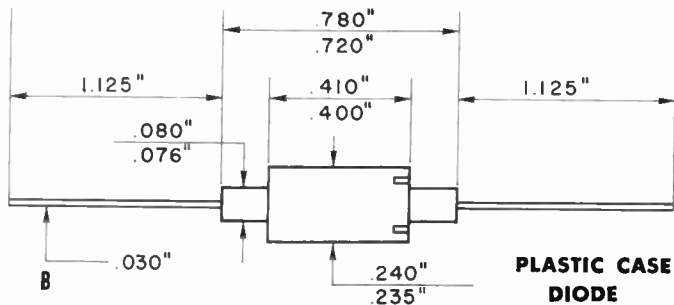

**PLASTIC CASE
DIODE**

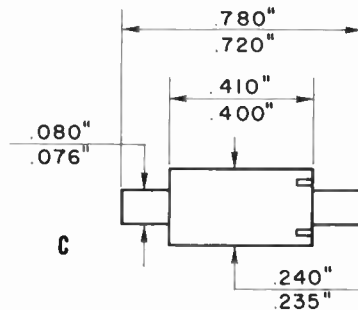


**GLASS-FILLED
PLASTIC CASE DIODE
... CLIP-IN TYPE**

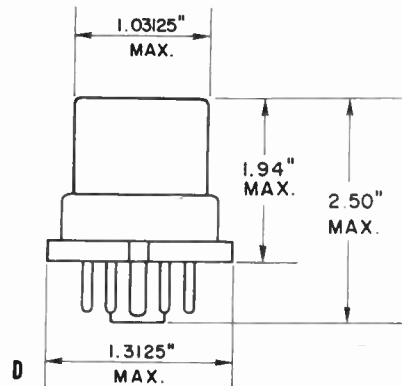



**QUAD WITH STANDARD
OCTAL BASE WILL BE
SUPPLIED FOR ANY CBS DIODE**



2N155



PNP power transistor . . .
metal case with plug-in leads for
automobile receivers . . . used for
audio power output stages,
servo amplifiers, d-c converter,
and magnetic coil driver



ELECTRICAL DATA

RATINGS, ABSOLUTE MAXIMUM, AT 25°C

Collector to base voltage, V_{CB}	-30	volts
Emitter to base voltage, V_{EB}	-15	volts
Collector current, continuous, I_C	-3	amp
Dissipation total ∇ , P	8.5	watts
Operating temperature, T_J	-40 to +85	°C
Storage temperature, T_{stg}	-40 to +85	°C

DESIGN CHARACTERISTICS

	LIMITS		
	Min.	Distribution Center	Max.
Collector cutoff current; I_{CBO} at $V_{CB} = -30V, I_E = 0$			
Case temperature 25°C.....		0.18	1.0 mAdc
Case temperature 50°C.....			2.0 mAdc
Case temperature 85°C.....			10 mAdc
Collector cutoff current; I_{CBS} at $V_{CB} = -30V$			
Case temperature 25°C.....			0.42 mAdc
Emitter cutoff current; I_{EBO} at $V_{EB} = -15V, I_C = 0$			
Case temperature 25°C.....		0.6	0.5 mAdc
Case temperature 50°C.....			1.0 mAdc
Case temperature 85°C.....			5.0 mAdc
Power gain \dagger , PG at 25°C.....	30		db
Current gain, B at 25°C			
$I_C = 0.25A$		45	
$I_C = 0.50A$	24	40	
$I_C = 1.00A$		32	
Saturation voltage; V_S at $I_C = 1.0A, 25°C$	0.47		0.65 Vdc
Input voltage, V_{BE} at 25°C			
$I_C = 0.25A$		0.34	Vdc
$I_C = 0.50A$		0.47	0.70 Vdc
$I_C = 1.00A$		0.60	Vdc
Thermal resistance, θ at 25°C.....			3 °C/w
Derating per °C temp. increase Δ	0.14		watts
Alpha cutoff frequency;			
$f_{\alpha b}$ at $V_C = 2V, I_C = 0.25A$	145	180	kc

TYPICAL OPERATIONS AT 25°C (one unit, common emitter)

Class A Amplifier

Collector supply voltage, V_{CC}	-14	Vdc
Collector current, I_C	-360	mAdc
Base current, I_B	-8	mAdc
Base to emitter voltage, V_{BE}	-0.32	Vdc
Dissipation, zero signal, P	4.4	watts
Input resistance, R_{in}	20	ohms
Load resistance, R_L	30	ohms
Power output, P_{out}	2	watts
Power input, P_{in}	1	mw
Power gain, PG.....	33	db
Distortion, D.....	5	%

2N155 (cont.)

PUSH-PULL CLASS B AMPLIFIER

Collector supply voltage, V_{CC}	-14 Vdc
Collector current, zero signal, I_C	-50 mAdc
Collector current, max. signal, I_C	-500 mAdc
Peak collector current, i_C	-1.5 Adc
Base current, zero signal, I_B	-1 mAdc
Base current, max. signal I_B	-13 mAdc
Dissipation, zero signal, P	0.7 watt
Dissipation, max. signal, P	1.6 watts
Input resistance, R_{in}	40 ohms
Load resistance (collector to collector), R_L	32 ohms
Power output †, P_{out}	9 watts
Power input ‡, P_{in}	30 mw
Power gain ‡, PG	25 db
Distortion, D	8 %

SWITCHING APPLICATION *

Collector supply voltage, V_{CC}	-14 Vdc
Collector load resistance, R_L	6.5 ohms
Collector current "OFF," I_C	-0.2 mAdc
Collector current "ON," I_C	-2 Adc
Base voltage "OFF," V_b	+1.5 Vdc
Base voltage "ON," V_b	-1.0 Vdc
Base current "ON," I_b	-100 mAdc
Dissipation "ON," P	2 watts
Switch power, PS	26 watts
Control power, PC	100 mw
Power gain, PG	25 db

NOTES:

■ IRE symbols used throughout. See APPENDIX for symbol definition.

- ▼ Bolted directly to a 6" x 6" x 1/8" aluminum sheet (75 sq. in. radiating surface)
 a. 7.25 watts max. with a 0.0015" mica washer treated with DC200 silicone oil between the transistor and the heat sink (75 sq. in. radiating surface)
 b. 1.5 watts max. in free air.

▲ Under mounting conditions listed in previous note.

- a. 0.12 watt under conditions of note ▼a.
 b. 0.024 watt under conditions of note ▼b.

† PG = Power output

available input power
 (from a 12 ohm generator)

where $I_C = 0.5A_{dc}$, $R_L = 30$ ohms

‡ Both units.


* Use of an efficient heat radiator for operation at these conditions is imperative.



2N156 2N158



PNP power transistor . . .
metal case for bolt type mounting
. . . used for low speed switching,
servo motor controls, and audio
or sawtooth oscillators



ELECTRICAL DATA

RATINGS, ABSOLUTE MAXIMUM, AT 25°C

	2N156	2N158*
Collector to base voltage, V_{CB}	-30	-60 volts
Emitter to base voltage, V_{EB}	-15	-30 volts
Collector current, continuous, I_C	-3	-3 amp
Dissipation total ∇ , P	8.5	8.5 watts
Operating temperature, T	-40 to +85	°C
Storage temperature, T_{stg}	-40 to +85	°C

DESIGN CHARACTERISTICS

	Type	Case Temp. °C	LIMITS		
			Min.	Distribution Center	Max.
Collector cutoff current, I_{CBO} $V_{CB} = -30V$, $I_E = 0V$	2N156	25		0.18	1.0 mA _{dc}
		50			2.0 mA _{dc}
		85			10 mA _{dc}
	2N158	25		0.14	1.0 mA _{dc}
		50			2.0 mA _{dc}
		85			10 mA _{dc}
Collector cutoff, current, I_{CBS} $V_{CB} = -30V$, $V_{EB} = 0V$	2N156	25		0.26	1.5 mA _{dc}
		50			5.0 mA _{dc}
	2N158	25		0.26	1.5 mA _{dc}
		50			5.0 mA _{dc}
		85			5.0 mA _{dc}
		85			5.0 mA _{dc}
Collector cutoff current, I_{CB} $V_{CB} = -30V$, $V_{EB} = -0.5V$	2N156	25			10 mA _{dc}
		85			10 mA _{dc}
	2N158	25			10 mA _{dc}
		85			10 mA _{dc}
Emitter cutoff current, I_{EBO} $V_{EB} = -15V$, $I_C = 0$	2N156	25		0.06	0.5 mA _{dc}
		50			1.0 mA _{dc}
		85			5.0 mA _{dc}
	2N158	25		0.08	0.5 mA _{dc}
		50			1.0 mA _{dc}
		85			5.0 mA _{dc}
Current gain, B $I_C = 0.25A$	2N156	25			45
		25	24		40
		25			32
	2N158	25			41
		25	21		36
		25			29
		25			29

CBS SEMICONDUCTORS

2N156-2N158 (cont.)

DESIGN CHARACTERISTICS (cont.)

Saturation voltage, V_s					
$I_c = 1.0A$	2N156	25	0.37	0.60	Vdc
$I_c = 1.0A$	2N158	25	0.46	0.75	Vdc
Input voltage, V_{BE}					
$I_c = 0.25A$	2N156	25	0.29		Vdc
$I_c = 0.25A$	2N158	25	0.33		Vdc
$I_c = 0.50A$	2N156	25	0.36	0.70	Vdc
$I_c = 0.50A$	2N158	25	0.42	0.85	Vdc
$I_c = 1.0A$	2N156	25	0.44		Vdc
$I_c = 1.0A$	2N158	25	0.53		Vdc
Thermal resistance, θ Both					25
Derating Δ					3 °C/w
Per °C ambient temp. increase... Both					
			0.14	watts	
Alpha cutoff frequency, F_{ab}					
$V_c = 2V$					
$I_c = 0.25A$	Both	24	145	180	Kc

TYPICAL OPERATIONS AT 25°C (one unit, common emitter)

	2N156	2N158
Collector supply voltage, V_{CC}	-14	-28 Vdc
Collector current, I_c	-360	-180 mAdc
Base current, I_b	-8	-3.8 mAdc
Base to emitter voltage, V_{BE}	-0.32	-0.27 Vdc
Dissipation, zero signal, P	4.4	4.4 watts
Input resistance, R_{in}	20	27 ohms
Load resistance, R_L	30	150 ohms
Power output, P_{out}	2	2 watts
Power input, P_{in}	1	0.4 mw
Power gain, PG	33	37 db
Distortion, D	5	6 %

Push-Pull Class B Amplifier

Collector supply voltage, V_{CC}	-14	-28 Vdc
Collector current, zero signal, I_c	-50	-25 mAdc
Collector current, max. signal I_c	-500	-500 mAdc
Peak collector current, i_c	-1.5	-1.5 Adc
Base current, zero signal, I_b	-1	-0.5 mAdc
Base current, max. signal, I_b	-13	-14 mAdc
Dissipation, zero signal, P	0.7	0.7 watt
Dissipation, max. signal, P	1.6	3.2 watts
Input resistance, R_{in}	40	40 ohms
Load resistance (collector to collector), R_L	32	60 ohms
Power output \ddagger , P_{out}	9	17 watts
Power input \ddagger , P_{in}	30	60 mw
Power gain \ddagger , PG	25	24 db
Distortion, D	8	8 %

SWITCHING APPLICATION*

	2N156	2N158
Collector supply voltage, V_{CC}	-14	-28 Vdc
Collector load resistance, R_L	6.5	13 ohms
Collector current "OFF," I_c	-0.2	-0.3 mAdc
Collector current "ON," I_c	-2	-2 Adc
Base voltage "OFF," V_b	+1.5	+1.5 Vdc
Base voltage "ON," V_b	-1.0	-1.7 Vdc
Base current, "ON," I_b	-100	-150 mAdc
Dissipation "ON," P	2	2.5 watts
Switching power, PS	26	54 watts
Control power, PC	100	250 mw
Power gain, PG	25	23 db

NOTES:

- *Units with higher collector-base voltage ratings are available upon request.
- IRE symbols used throughout. See APPENDIX for symbol definition.
- ▼ Bolted directly to a 6" x 6" x 1/8" aluminum sheet. (75 sq. in. radiating surface)
 - a. 7.25 watts max with a 0.0015" mica washer treated with DC200 silicone oil between the transistor and the heat sink (75 sq. in. radiating surface).
 - b. 1.5 watts max. in free air.
- ▲ Under mounting conditions listed in previous note:
 - a. 0.12 watt under condition for note ▼a.
 - b. 0.024 watt under conditions for note ▼b.
- ‡ Both units.
- * Use of an efficient heat radiator for operation in these conditions is imperative.

CBS SEMICONDUCTORS




2N180



2N181



PNP general purpose transistor
... high gain ... low-to-medium
power ... low noise ... for **2N180**
Class A and B stages, preamplifiers,
and low-frequency flip-flop circuits



2N181



ELECTRICAL DATA

RATINGS, ABSOLUTE MAXIMUM, AT 25°C

	2N180	2N181
Collector to base voltage, d-c	-30	-30 volts
Dissipation, total in free air	150	250 mw
Derating per °C ambient temp. increase	3	5 mw
Operating temperature, junction	-50 to +75	°C
Storage temperature	-50 to +85	°C

TYPICAL CHARACTERISTICS AT 25°C

Collector peak reverse voltage, emitter open	-40	-40 volts
Collector current, emitter open at -30V	-10	-10 μ A
Collector current, base open at -10V	-0.3	-0.3 mA
Emitter peak reverse voltage, collector open	-30	-30 volts
Emitter reverse current, collector open at -20V	-8	-8 μ A

Low Frequency Small Signal Parameters

Collector voltage, V_{CB}	-6	-6 volts
Emitter current, I_E	1.0	1.0 mA
Frequency	270	270 c.p.s.
Base-collector current amplification, β	60	60
Emitter-collector current amplification, α or h_{fb}	0.985	0.985
Alpha cut-off frequency, $F_{\alpha c}$	700	700 kc
Emitter input resistance, output shorted, h_{ib}	32	32 ohms
Collector output conductance, input open, h_{ob}	0.5	0.5 μ mhos
Collector-emitter feedback voltage ratio, h_{rb}	4×10^{-4}	4×10^{-4}
Collector capacitance, at 500 kc	25	25 μ f
Noise figure	12	12 db

Large Signal Low Frequency Parameters

Base-collector current amplification, $B = I_C/I_B$		
$I_B = 0.1$ ma, $V_C = -1V$	70	70
$I_B = 1.0$ ma, $V_C = -1V$	50	50
Base input resistance, $R_i = V_b/I_b$		
$I_B = 0.1$ ma, $V_C = -1V$	2000	2000 ohms
$I_B = 1.0$ ma, $V_C = -1V$	500	500 ohms
Saturation resistance, R_s	2.5	2.5 ohms

CBS SEMICONDUCTORS

2N180-2N181 (cont.)

TYPICAL OPERATIONS AT 25°C

Class A Low Level Audio Amplifier (common emitter connected)

	2N180	2N181
Collector supply voltage	-6	-6 volts
Collector current, d-c	-1	-1 ma
Current amplification	60	60
Load resistance, dynamic	20	20 K
Input resistance, dynamic	1500	1500 ohms
Power gain	43	43 db
Collector supply voltage	-9	-12 volts
Collector current, d-c	-15	-20 ma
Base current, d-c	-250	-300 μ a
Dissipation, max.	135	250 mw
Current amplification	50	50
Stabilizing resistance in emitter circuit, bypassed with 200 μ f capacitor	10	10 ohms
Base-emitter circuit d-c resistance, max.	1000	500 ohms
Input resistance, dynamic	250	250 ohms
Load resistance, dynamic	560	110 ohms
Power output, max.	65	110 mw
Power gain	37	34 db

Push-Pull Class B Amplifier (common emitter connected)†


Collector supply voltage	-9	-12 volts
Collector current, max. signal	-25	-38 ma
Collector current, zero signal	-5	-7 ma
Peak collector current, max. signal	-75	-110 ma
Base current, max. signal	-500	-800 μ a
Base current, zero signal	-60	-80 μ a
Dissipation per unit, max. signal	100	200 mw
Dissipation per unit, zero signal	40	80 mw
Stabilizing resistance in emitter circuit, not bypassed	10	10 ohms
Base-emitter circuit d-c resistance, max.	1000	500 ohms
Input resistance, dynamic	800	700 ohms
Load resistance, dynamic	110	100 ohms
Power output, total max.‡	300	600 mw
Power input, total max.‡	1.0	2.0 mw
Power gain	25	25 db

NOTES:

‡Values for both units.

†Information on matched pair specification available on request.

LOW FREQUENCY HYBRID PARAMETERS

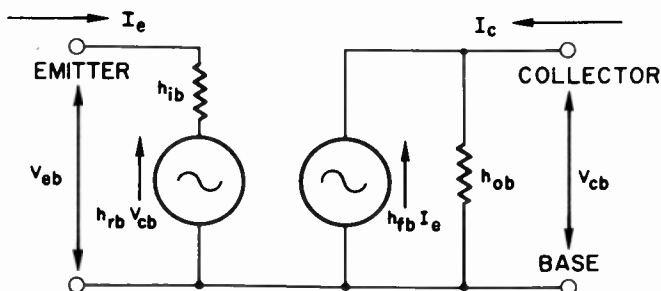


CBS SEMICONDUCTORS



2N438
2N439
2N440



NPN high frequency transistors
. . . low base resistance
providing fast response . . .
for switching, flip-flop, and
bilateral circuits



ELECTRICAL DATA

RATINGS, ABSOLUTE MAXIMUM, AT 25°C

	2N438	2N439	2N440	
Collector to base voltage, V_{CB}	30	30	30	volts
Emitter to base voltage, V_{EB}	25	25	25	volts
Total dissipation.....	100	100	100	mw
Derate approx. 2 mw per °C increase of ambient temperature				
Operating junction temperature.....				-50°C to 85°C
Storage temperature.....				-50°C to 85°C

ELECTRICAL CHARACTERISTICS AT 25°C
Static and Large Signal Parameters

	Type	LIMITS		
		Min.	Mode Max.	
Cutoff Collector Current, I_{CBO} $V_{CB} = 25V$	all		1.5	10 μ Adc
Cutoff Collector Current, I_{CBO} $V_{CB} = 6V, T_A = 75°C$	all			150 μ Adc
Cutoff Emitter Current, I_{EBO} $V_{EB} = 25V$	all		1.5	10 μ Adc
Cutoff Emitter Current, I_{EBO} $V_{CB} = 6V, T_A = 75°C$	all			150 μ Adc
Collector-Base Breakdown Voltage, $BV_{CBO}, I_C = 100 \mu A$	all	30		Vdc

	Type	LIMITS		Max.
		Min.	Mode	
Collector-Emitter Breakdown Voltage, $BV_{CEO}, I_C = 300 \mu A$	2N438 2N439 2N440	25 20 15		Vdc Vdc Vdc
Current Gain — D.C., h_{FE} $I_C = 50 mA, V_{CE} = 1.0V$	2N438 2N439 2N440	20 30 40	25 45 70	— — —
Input Voltage, V_{EB} $I_C = 50 mA, V_{CE} = 1.0V$	2N438 2N439 2N440		0.37 0.32 0.27	Vdc Vdc Vdc
Saturation Resistance, R_s $I_C = 50 mA$	all		3	5 ohms

Typical Switching Characteristics†

Parameter	2N438	2N439	2N440	
Rise time, t_r	0.7	0.5	0.3	μ sec
Fall time, t_f	0.5	0.3	0.2	μ sec
Storage time, t_s	0.8	0.7	0.6	μ sec

Low Frequency, small signal parameters†

	Type	LIMITS		
		Min.	Mode	
Current Gain, common emitter, h_{ie}	2N438 2N439 2N440	15 15 15	25 35 65	
Input Resistance, common base, h_{ib}	all		27	ohms
Input Resistance, common emitter, h_{ie}	2N438 2N439 2N440		1.0 1.5 2.5	K ohms K ohms K ohms

CBS SEMICONDUCTORS

2N438 • 2N439 • 2N440 (cont.)

High Frequency, small signal parameters*

	Type	LIMITS		
		Min.	Mode Max.	
Cutoff Frequency, f_{ab}	2N438	2.5		Mc/s
	2N439	5.0		Mc/s
	2N440	10.0		Mc/s
Collector Capacitance, C_c	all	9	15	μmf
Extrinsic base resistance, r_b'	2N438		180	ohms
	2N439		220	ohms
	2N440		300	ohms
Collector base time constant, $r_b'C_c$	2N438		2000	μmsec
	2N439		2300	μmsec
	2N440		3000	μmsec
Power Gain, unilateralized, PG....	2N438		29	
	2N439		32	
	2N440		35	

NOTES:

- $i_{jc} = 10 \text{ mA}$, $i_{b1} = 1 \text{ mA}$, $i_{b2} = 1 \text{ mA}$
- $V_{CB} = 6.0 \text{ Vdc}$, $I_E = 1.0 \text{ mAdc}$, $f = 270 \text{ c/s}$
- * $V_{CB} = 6.0 \text{ Vdc}$, $I_E = 1.0 \text{ mAdc}$, $f = 455 \text{ Kc/s}$.

APPLICATION, EXAMPLES


The high-current, short-pulse applications of transistors are numerous and their potentials can be illustrated by considering a transistor-core gate.

The basic transistor magnetic-core gate circuit shown can be explained as follows: If a pulse is applied to the reset winding, Core 1 is demagnetized or reset. Consequently, there will be coupling between the collector and base windings.


When an input pulse is applied, regenerative action causes a large pulse output and magnetizes Core 1 to saturation. Without further re-setting, since the core is now saturated, the collector and base windings are not coupled. There will be no output pulse as there is no response to an input pulse.

Several transistor core gates can be connected in cascade to construct a shift register . . . binary counter or scales . . . decade counter or logic circuits, etc. The high-current pulse operation of transistors can also be used to drive magnetic heads for writing and reading.

CBS transistor 2N439 or 2N440 in a magnetic-core gate circuit. Each input pulse disables the circuit by a saturable magnetic core. It must then be reset before responding to another input pulse.



A typical flip-flop circuit using a pair of CBS 2N439's. This circuit resembles closely the Eccles-Jordan flip-flop vacuum tube circuit. The circuit has two stable states, transistor T_1 "on" and T_2 "off," and vice versa. The cross coupling capacitors C_1 permit triggering from one state to the other.

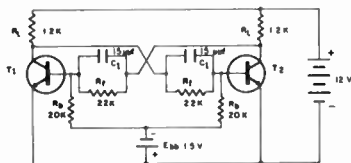


$$R_L \approx \frac{E_{cc}}{I_c \text{ "on"}}$$

The coupling resistor $R_f = \frac{BR_b h_{FE}}{R_{b1c} \text{ "on" } E_{bbB}}$


where $h_{FE} = \frac{I_c \text{ "on" }}{I_b \text{ "on"}}$



2N255 2N256



PNP power transistor
 . . . metal case with plug in type leads . . . designed for radio amateurs and experimenters use†
 . . . used in power output stage of portable phonograph and mobile public address systems



ELECTRICAL DATA

RATINGS, ABSOLUTE MAXIMUM, AT 25°C

	2N255	2N256
Collector to base voltage, d-c	-15	-30 volts
Emitter to base voltage, d-c	-15	-30 volts
Collector current, steady state d-c	-3	-3 amp
Dissipation, total in free air	1.5	1.5 watts
Derating per °C ambient temp. increase	.024	.024 watt
Dissipation, total with heat radiator	6.25	.625 watts
Derating per °C ambient temp. increase	0.1	0.1 watt
Operating temperature, junction	-40 to 85	°C
Storage temperature	-40 to 85	°C

TYPICAL CHARACTERISTICS AT 25°C

Collector current	-500	-500 ma
Collector voltage	-6	-12 volts
Base resistance	9 to 24	ohms
Alpha cutoff frequency, $F_{\alpha co}$	200	200 kc
Collector to base current amplification, d-c	30 to 50	
Saturation voltage, $V_{s, I_C = 1.0 \text{ amp}}$	0.5	0.5 volts
Operating temp. gradient, junction and surface of copper base	3	3 °C/w

TYPICAL OPERATION AT 25°C

Class A Amplifier (one unit, common emitter connected)

Collector supply voltage	-7	-14 volts
Collector to emitter voltage, d-c	-6	-12 volts
Collector current, d-c	-500	-500 ma
Base to emitter voltage, d-c	0.4	to 0.6 volts
Base current, d-c	-10 to -16	ma
Input resistance	10 to 25	ohms
Load resistance	14	28 ohms
Power output	1	2 watts
Total harmonic distortion	5 to 7	%
Power input	2 to 10	mw
Power gain	19 to 26	22 to 29 db

Push-Pull Class B Amplifier (common emitter connected)

Values for each unit	2N255	2N256
Collector supply voltage ∇	-7	-14 volts
Collector current, zero signal	-50	-50 ma
Collector current, max. signal	-500	-500 ma
Peak collector current	-1500	-1500 ma
Base current, zero signal	-0.5 to -1.5	ma
Base current, max. signal	-10 to -16	ma
Dissipation, max. signal	0.8	1.6 watts
Input resistance	18 to 48	ohms
Load resistance	4	8 ohms
Power output \square	5	10 watts
Power input \square	25 to 150	mw
Power gain \square	12 to 20	15 to 23 db

CBS SEMICONDUCTORS

2N255-2N256 (cont.)

NOTES:

- These are peak values; the 2N255 and 2N256 should be operated from 6 and 12-volt batteries, respectively.
- ▲ When operated within maximum rated power dissipation using a 6" x 6" x 1/8" aluminum heat radiator, the temperature should not exceed 151°F (66°C) on the surface of the case.
- Use of an efficient heat radiator for operation at these conditions is imperative.
- ▽ The supply voltages given for the 2N255 and 2N256 are those used in mobile operation, nominally -6 and -12 volts, respectively.
- Values for both units.
- † For circuits of various experimental applications send for CBS-Hytron booklet PA-16.

CBS SEMICONDUCTORS



SPECIAL PURPOSE TUBES

This CBS Reference Guide for Transmitting and Special Purpose Tubes includes the majority of types that are in current demand.

Inclusion of a particular tube type does not indicate a preference for its use or a guarantee of availability from CBS-Hytron. For availability information, consult your CBS-Hytron Distributor.

These data have been selected for their maximum usefulness for quick reference. Characteristics given are average values and typical operations are those considered to be most common for the particular tube.

A tube type is easily found in these tables by using the index. If the classification of a tube is known, it can be quickly located by finding the appropriate table. (The tables are arranged in alphabetical order.)

Table I	Computer Tubes
Table II	Gaseous Diodes
Table III	Gaseous Triodes and Tetrodes
Table IV	Phototubes
Table V	Power Tetrodes, Pentodes, and Beam Tubes
Table VI	Power Triodes
Table VII	Receiving Tubes — Special Applications
Table VIII	Receiving Tubes — Military and Industrial
Table IX	Rectifiers
Table X	UHF Tubes

TYPE	TABLE	TYPE	TABLE	TYPE	TABLE
OA2	II	1P40	IV	3B25	IX
OA2WA	II	2A4G	III	3B28	IX
OA2WA, JAN	II	2C39B	X	3C23	III
OA2WA, USN	II	2C40	X	3D21A	V
OA3 (VR75)	II	2C43	X	3E29	V
OA4G	III	2D21	III	4X150A	V
OB2	II	2E22	V	4X150D	V
OB2WA	II	2E24	V	5R4GY	IX
OB2WA, JAN	II	2E25A	V	5Y3WGTA	IX
OB2WA, USN	II	2E26	V	6AJ5	VII
OB3 (VR90)	II	2E30	V	6AN5	V
OC3 (VR105)	II	2X2A	IX	6A56	VII
OD3 (VR150)	II	3A4	VII	6A57G	VII
1C21	III	3A5	VII	6AU6WA	VIII
1P39	IV	3B4	VII	6D4	III

SPECIAL PURPOSE TUBES (cont.)

TYPE	TABLE	TYPE	TABLE	TYPE	TABLE
6J4	X	1622	V	6012	III
6SL7WGT	VIII	1624	V	6021	VIII
6SN7WGT	VIII	1625	V	6072	VII
6V6GT	V	1635	VII	6080	VIII
12A6	V	2050	III	6099	VIII
12AT7WA	VIII	5513	VI	6101/6J6WA	VIII
12AY7	VII	5514	VI	6111	VIII
26A7GT	VII	5516	V	6112	VIII
FG27A	III	5518	VI	6134	VIII
HY69	V	5545	III	6135	VIII
83	IX	5560/FG95	III	6136	VIII
FG95	III	5561/FG104	IX	6146	V
FG97	III	5581	IV	6161	X
FG104	IX	5636	VIII	6197	I
575A	IX	5651	II	6201	VIII
673	IX	5654	VIII	6202	IX
801A	VI	5654/6AK5W	VIII	6211	I
802	V	5654/6AK5W/6096	VIII	6216	V
805	VI	5670	VIII	6265	VIII
807	V	5675	X	6386	VIII
809	VI	5686	VIII	6463	I
810	VI	5687	VIII	6524	V
811A	VI	5690	IX	6626	II
813	V	5691	VIII	6626/OA2WA	II
814	V	5692	VIII	USN6626/OA2WA	II
815	V	5693	VIII	6627	II
816	IX	5696	III	6627/OB2WA	II
826	VI	5718	VIII	USN6627/OB2WA	II
828	V	5719	VIII	6663/6AL5	IX
829B	V	5725	VIII	6669	V
832A	V	5725/6A56W	VIII	6677	VIII
833A	VI	5725/6A56W/6187	VIII	6678	VIII
837	V	5726/6AL5W/6097	IX	6680/12AU7	VIII
838	VI	5749	VIII	6681/12AX7	VIII
845	VI	5749/6BA6W	VIII	6792	V
857B	IX	5750/6BE6W	VIII	6807	III
866A	IX	5751	VIII	6830	II
868	IV	5763	V	6831	II
869B	IX	5812	V	8008	IX
872A	IX	5814	VIII	9001	X
884	III	5814A	VIII	9002	X
918	IV	5814WA	VIII	9003	X
921	IV	5823	III	9006	IX
922	IV	5879	VII		
923	IV	5881	V		
927	IV	5894	V		
929	IV	5902	VIII		
930	IV	5915	I		
931A	IV	5963	I		
955	X	5964	I		
HY1269	V	5965	I		
1614	V	6004	IX		
1616	IX	6005	VIII		
1620	VII	6005/6AQ5W	VIII		
1621	VIII	6005/6AQ5W/6095	VIII		

CBS ELECTRON TUBES

TABLE I.

CBS COMPUTER TUBES

TYPE*	DESCRIPTION FEATURES AND NOTES	CONSTRUCTION		CATHODE		SERVICE APPLICATION	CHARACTERISTICS AND TYPICAL OPERATION											TYPE*				
		Basing	Base	Length, inches	Diameter, inches		Heater - Filament Volts	Ampere	Plate Supply Volts	Grid 1 Volts	Grid 2 & 4 Volts	Grid 3 Supply Volts	Plate Ma	Grid 2 & 4 Ma	Circuit Resistance, Ohms							
															Grid 1	Grid 3						
5915	Pentagrid amplifier for use as a gated amplifier in computers. Grids 1 & 3 are independent control grids.	7CH	7-pin Min.	2½	¾	Htr.	6.3	0.3	Gated Amplifier G ₁ Control, cutoff G ₂ Control, cutoff "ON"	150 150 150	-10† 0 0	75 75 0	0 -10 0	0 0 5.8	0 14 9	20000 20000 20000	47000 47000 47000	47000 47000 47000	5915			
5963	Medium- μ duotriode with a separate terminal for each cathode.	9A	9-pin Min.	2½	¾	Htr.	12.6 6.3	0.15 0.3	Freq. Halfer, cutoff "ON"	150 150	-15 0			0 5.1	-	20000 20000	47000 47000	- -	5963			
5964	Medium- μ duotriode. Values are for each unit.	7BL	7-pin Min.	2½	¾	Htr.	6.3	0.45	Freq. Halfer, cutoff "ON"	150 150	-10 0			0 5.1	-	20000 20000	47000 47000	- -	5964			
5965	Medium- μ duotriode. Closely controlled cutoff bias balance between each unit. Values are for each unit. Separate terminals for each cathode.	9A	9-pin Min.	2½	¾	Htr.	12.6 6.3	0.225 0.45	Freq. Divider	150 150	Grid volts for I ₁ of 150 μ a = -5.5; Difference between grid voltages of units for I ₁ of 150 μ a/unit = 1.5 V maximum; Plate load resistance = 20,000 ohms Grid volts for I ₁ of 140 μ a = less than 1 V; Plate current = 10.5 ma; Plate circuit resistance = 7200 ohms											5965
6197	Sharp cutoff power pentode; also designed for pulse amplifier circuits. Has a G _m of 11,000 μ mhos.	9BV	9-pin Min.	2½	¾	Htr.	6.3	0.65	Freq. Divider, cutoff "ON"	250▲ 250▲	-12 -3	150▲ 150▲	0 0	0 30	-	-	-	-	-	6197		
6211	Medium- μ duotriode with a closely controlled cutoff bias balance between each unit. Each cathode has a separate terminal.	9A	9-pin Min.	2½	¾	Htr.	12.6 6.3	0.15 0.3	Freq. Divider, cutoff "ON"	150 150					5.15	-	20000	47000	-	6211		
6463	Medium- μ duotriode with extremely high zero-bias plate current and sharp cutoff for each section.	9CZ	9-pin Min.	2½	¾	Htr.	12.6 6.3	0.3 0.6	Freq. Divider	100 200 250	★ -11 0				29 1.0 14.5	-	-	-	3850	-	6463	

*All types listed are designed for "on-off" control usage during long periods of operation under cutoff conditions. Steady plate current is provided during "on" cycles. All types except the 5915 can be used in frequency divider circuits of electronic computers.

★ With grid current adjusted for 200 μ a approx.
▲ Voltages at electrode terminals.

†Grid 1 supply volts.

TABLE II. CBS GASEOUS DIODES (Voltage Regulator and Reference)

TYPE	DESCRIPTION FEATURES AND NOTES	CONSTR.		MAXIMUM RATINGS				SERVICE APPLICATION	TYPICAL OPERATION				TYPE
		Basing	Base†	Starting Current, Ma	Operating Ma		Ambient Temp. **		Min. Supply Volts, D-C	Operating Volts, D-C	Max. Shunt Capacitor, μ f	Regulation Average Volts	
					Min.	Max. †							
OA2	Glow Tube — 150 Volts	5B0	7-pin Min.	75	5	30	-55 to +90°C	Voltage Regulator	185	150	0.1	2	OA2
OA2WA Δ	Glow Tube — 150 Volts	5B0	7-pin Min.	Same as 6626 below.				Voltage Reg. & Ref.	Same as 6626. Tested for military applications.				OA2WA
OA3(VR75)	Glow Tube — 75 Volts	4AJ	6-pin O.	100	5	40	-55 to +90°C	Voltage Regulator	105	75	—	5	OA3(VR75)
OB2	Glow Tube — 105 Volts	5B0	7-pin Min.	75	5	30	-55 to +90°C	Voltage Regulator	133	108	0.1	1	OB2
OB2WA Δ	Glow Tube — 105 Volts	5B0	7-pin Min.	Same as 6627 below				Voltage Reg. & Ref.	Same as 6627. Tested for military applications.				OB2WA
OB3(VR90)	Glow Tube — 90 Volts	4AJ	6-pin O.	—	5	30	—	Voltage Regulator	125	90	—	5	OB3(VR90)
OC3(VR105)	Glow Tube — 105 Volts	4AJ	6-pin O.	100	5	40	-55 to +90°C	Voltage Regulator	133	108	—	2	OC3(VR105)
OD3(VR150)	Glow Tube — 150 Volts	4AJ	6-pin O.	100	5	40	-55 to +90°C	Voltage Regulator	185	150	—	3.5	OD3(VR150)
5651	Glow Tube — 87 Volts	5B0	7-pin Min.	—	1.5	3.5	-55 to +90°C	Voltage Reference	115	87	0.02 Stability = 0.1 V	3.0 max.	5651
6626 Δ	Glow Tube — 150 Volts Reliable operation under adverse conditions.	5B0	7-pin Min.	75	5	30	-55 to +150°C	Voltage Regulator	165	148	0.1	2	6626
				—	6	10	-55 to +150°C	Voltage Reference	165	148	Stability = 0.2 V	0.5	
6627 Δ	Glow Tube — 105 Volts Reliable operation under adverse conditions.	5B0	7-pin Min.	75	5	30	-55 to +110°C	Voltage Regulator	130	108	0.1	1.5	6627
				—	6	10	-55 to +150°C	Voltage Reference	130	107	Stability = 0.2 V	0.2	

*Use sufficient series resistance to limit current at all times to not more than the rated values.

Δ Also JAN and USN types.

†All miniature tubes listed are 2 $\frac{3}{8}$ in. high and $\frac{3}{8}$ in. in diameter.

**Ambient temperature for tubes operated at maximum ratings; if ratings are decreased, the ambient temperature may be increased.

The octal types are 4 $\frac{1}{8}$ in. high and 1 $\frac{1}{8}$ in. in diameter.

TABLE III.

CBS GASEOUS TRIODES AND TETRODES (Cold Cathode and Thyatron)

TYPE	DESCRIPTION	CONSTRUCTION		CATHODE		SERVICE	MAX. RATINGS (Absolute Values)							TYPE			
		Beating	Base	Length, inches	Diameter, inches		Heater - Filament	Volts	Amperes	APPLICATION	Approx. Tube Drop Volts	Temperature Range Ambient °C	Peak Forward Anode Volts		Peak Inverse Anode Volts	Peak Cathode Current, Amps	Average Cathode Current, Amps
0A4G	Cold cathode gas triode for application in calculating machines and carrier current relay systems.	4V	6-pin O.	4½	1½ ₁₆	Cold Cathode		Relay Service	70	Peak Starter Electrode Voltage = 75 to 90 V	225	0.10	.025		0A4G		
1C21	Similar to 0A4G but for d-c operation only.	4V	6-pin O.	2½	1½ ₁₆	Cold Cathode		Relay Service	73	Peak Starter Electrode Voltage = 66 to 80 V	180	0.10	.025		1C21		
2A4G	Control grid type gaseous triode	5S	7-pin O.	4½	1½ ₁₆	Fil.	2.5	2.5	Control Tube	15	-55 to +70	200	200	1.25	.10		2A4G
2D21	Gas tetrode with negative control operable in a high sensitivity circuit directly from a high-vacuum phototube.	7BN	7-pin Min.	2½	¾	Htr.	6.3	0.6	Grid-Controlled Rectifier Relay Tube	8	-75 to +90	650	1300	0.5	.10	.10	2D21
3C23	Mercury-vapor triode thyatron with negative control.	3G	4-pin	6½	2½ ₁₆	Fil.	2.5	7.0	Relay Control	15	-40 to +80*	1250	1250	6.0	1.5	120	3C23
6D4	Gas triode for application as a relay tube or relaxation oscillator.	5AY	7-pin Min	2½	¾	Htr.	6.3	0.25	Relay Service	16	-55 to +90	350	350	0.11	.025		6D4
FG27A	Mercury-vapor thyatron with negative control for use in relay circuits. Requires only a small amount of grid power.	4CF	4-pin	7½	3	Fil.	5.0	4.5	Relay Service	16	-40 to +80	1000	1000	10	2.5	200	FG27A
FG95	See data for 5560/FG95																FG95
FG97	Mercury-vapor, double grid thyatron for use where grid power is small and actuation of the grid from a high impedance source is desired.	FG97	4-pin	6½	2½ ₁₆	Fil.	2.5	5.0	Relay Service	16	+40 to +80*	1000	1000	2.0	0.5	40	FG97
884	Gas type triode with negative control. Recommended for new equipment design.	6Q	6-pin O.	4½	1½ ₁₆	Htr.	6.3	0.6	Relaxation Oscillator	14	-75 to +90	350		0.3	0.075		884
											For Relaxation Oscillator (Sweep Circuit Service): Peak Anode Volts = 300. Peak Cathode Amps = 0.3.						

TABLE III. (continued) Gaseous Triodes and Tetrodes

TYPE	DESCRIPTION	CONSTRUCTION						CATHODE	SERVICE	MAX. RATINGS (Absolute Values)						TYPE	
		Basing	Base	Length, inches	Diameter, inches	Heater - Filament	Volts	Ampere	APPLICATION	Approx. Tube Drop Volts	Temperature Range Ambient °C	Peak Forward Anode Volts	Peak Inverse Anode Volts	Peak Cathode Current, Amps	Average Cathode Current, Amps		Surge Current, Amps
2050	Gas type tetrode with negative control which can be operated directly from a high-vacuum phototube.	6BS	8-pin O.	4 $\frac{1}{8}$	1 $\frac{1}{16}$	Htr.	6.3	0.6	High Sensitivity Relay Control	8	-75 to +90	650	1300	1.0	0.1	10	2050
5545	Gas filled triode with negative control used for control applications.	4BZ	4-pin	9	2 $\frac{1}{8}$	Fil.	2.5	21	Control Tube	16	-55 to +70	1500	1500	80	6.4	1120	5545
5560/FG95	Mercury-vapor triode thyratron with negative control characteristics. Low grid power requirement.	4CD	4-pin	7 $\frac{1}{16}$	2 $\frac{1}{8}$	Htr.	5.0	4.5	Relay Control and Ignitor Firing	16	-40 to +80*	1000	1000	15	2.5	200	5560/FG95
5696	Gas type tetrode thyratron for relay applications such as counter circuits where low heater current gain and short deionization time are important	7BN	7-pin Min.	1 $\frac{3}{8}$	$\frac{3}{8}$	Htr.	6.3	0.15	High Sensitivity Relay Control	10	-55 to +90	500	500	0.1	.025	2	5696
5823	Glow discharge, cold cathode type for "on-off" control of low current electrical circuits.	4CK	7-pin Min.	2 $\frac{1}{8}$	$\frac{3}{8}$	Cold Cathode			Relay Service		Peak Anode and Starter Electrode Volts (Inverse and Forward) = 200 V Peak Starter Electrode Breakdown Volts = +73 to +105V					5823	
6012	Negative control thyratron for relay and grid controlled rectifier service, especially motor control and low-power inverter service.	6CO	6-pin O.	4 $\frac{1}{8}$	1 $\frac{1}{32}$	Htr.	6.3	2.6	Relay Service	10	-75 to +90	650	1300	5.0	0.5	20	6012
6807	Negative control gas triode for control applications.	6807	4-pin	9	2 $\frac{1}{8}$	Fil.	2.5	21	Control Tube	16	-55 to +70	1500	1500	80	6.4	1120	6807

*Condensed Mercury °C

TABLE IV.

CBS PHOTOTUBES

TYPE	DESCRIPTION FEATURES AND NOTES	CONSTRUCTION				SPECTRAL CHARAC.		MAX. RATINGS						LUMINOUS SENSITIVITY:			TYPE
		Basing	Base	Length, inches	Diameter, inches	Wavelength Angstroms	Max. Response		Anode Supply D-C or Peak A-C Volts	Peak Cathode Current, μa	Peak Cathode Current Density $\mu\text{a sq. in.}$	Average Cathode Current, μa	Gain Amplification Factor	I_b Dark			
							Sensitivity $\mu\text{a } \mu\text{ watt}$	Max. D.C. $\mu\text{a} \star$						0 cps	5000 cps	10000 cps	
1P39	Vacuum type similar to type 929 except for non-hygroscopic base. For high humidity conditions. Blue sensitive.	3J	6-pin D.	3 $\frac{1}{16}$	1 $\frac{1}{32}$	4000	.042	250	20	100	5	—	.005	45	45	45	1P39
1P40	Gas type similar to 930 except for non-hygroscopic base. For high humidity conditions. Red sensitive.	3J	6-pin D.	3 $\frac{1}{16}$	1 $\frac{1}{32}$	8000	.0135	90	10	100	3 Δ	10	.005	135	111	101	1P40
868	Gas type phototube for the reproduction of sound.	2K	4-pin	4 $\frac{1}{8}$	1 $\frac{1}{8}$	8000	.009	100	20	100	5 \blacktriangle	8	.10	90	77	67	868
918	Used for the reproduction of sound, for relay controls, and for measurements. Red sensitive.	2K	4-pin	4 $\frac{1}{8}$	1 $\frac{1}{8}$	8000	.015	90	20	100	5 Δ	10.5	.10	150	120	105	918
921	Gas cartridge type for relay applications and light measurements. Red sensitive.	2AQ	Spec.	1 $\frac{3}{32}$	$\frac{3}{8}$	8000	.0135	90	10	100	3 Δ	10	.10	135	119	108	921
922	Cartridge vacuum type for relay applications. Red sensitive.	2AQ	Spec.	1 $\frac{3}{32}$	$\frac{3}{8}$	8000	.002	500	15	100	5	—	.005	20	20	20	922
923	For replacement purposes. Types 1P40 or 930 recommended for new equipment. Gas type.	2K	4-pin	3 $\frac{1}{16}$	1 $\frac{1}{16}$	8000	.0135	90	10	100	3 Δ	10	.10	135	111	101	923
927	Gas type for 16 mm. sound equipment, relay and measurement applications.	2F	Spec.	2 $\frac{1}{32}$	2 $\frac{1}{32}$	8000	.0125	90	6	100	2 Δ	10	.10	125	110	100	927

TABLE IV. (continued) Phototubes

TYPE	DESCRIPTION	CONSTRUCTION				SPECTRAL CHARAC.		MAX. RATINGS						I _b Dark		LUMINOUS SENSITIVITY †		TYPE
		Basing	Base	Length, inches	Diameter, inches	Wavelength Angstroms	Max. Response		Anode Supply D-C or Peak A-C Volts	Peak Cathode Current, μa	Peak Cathode Current Density μa/sq. in.	Average Cathode Current, μa*	Gain Amplification	Max. D-C; μa *	μa/Lumen			
							Sensitivity μa/μ watt	250							0 cps	5000 cps	10000 cps	
929	Vacuum type for light measurement and relay application. Blue sensitive.	3J	6-pin O.	3 1/16	1 1/2	4000	.042	250	20	100	5	-	.125	45	45	45	929	
930	Gas type for sound reproduction and relay use. Red sensitive.	3J	6-pin O.	3 1/16	1 1/2	8000	.0135	90	10	100	3 Δ	10	.10	65	56	50	930	
931A	High sensitivity multiplier type used in facsimile transmission, sound reproduction, and research. Blue sensitive.	11K	Spec.	3 1/16	1 1/8	4000	18600	1250	Supply Volts between Final Dynode & Anode = 250 Peak Anode Ma = 10 Average Anode Ma = 1.0 Ambient Temp. = 75°C D-C Anode Dark Current = 0.1 μa Anode Luminous Sensitivity [] = 20 amp/lumen Equivalent Noise Input [] = 7 x 10 ⁻¹⁷ lumens Current Amplification [] ▼ = 1 x 10 ⁻⁴								931A	
5581	Gas type similar to 930. Designed for sound reproduction from a dye-image sound track used with an incandescent light source.	3J	6-pin O.	3 1/16	1 1/2	4000	.125	100	10	100	3 Δ	5.5	.05	135	124	108	5581	

□ With 100 volts/dynode stage and 90 volts between final dynode and anode.

Δ May be doubled when anode supply voltage is limited to 70 volts.

★ At 90 volts for all gas types; 250 volts for all vacuum types at 25°C.

▲ May be doubled when anode supply voltage is limited to 80 volts.

*Averaged over any interval of 30 seconds maximum.

▼ Ratio of anode sensitivity to cathode sensitivity.

†Measured with 2870°K light source.

TABLE V.

CBS POWER TETRODES, PENTODES, AND BEAM TUBES

TYPE	Max. Plate Watts	DESCRIPTION FEATURES AND NOTES	DESCRIPTION		CONSTRUCTION				CATHODE		SERVICE	MAX. RATINGS (CCS unless noted)						TYPICAL OPERATION					TYPE
			Basing	Base	Length, Inches	Diameter, Inches	Heater—Filament Volts	Amperes	APPLICATION Δ	Frequency in Mc for Full Input		Plate Volts	Screen Volts	Screen Watts	Plate Volts	Screen Volts	Grid Volts	Plate Ma†	Screen Ma†	Grid Ma, D-C	Drive Watts	Output Watts	
2E22	30	Pentode power amplifier and oscillator. Filament type for mobile service.	5J	5-pin	6 $\frac{1}{2}$	2 $\frac{1}{16}$	Oxide Fil.	6.3	1.5	CT* CT* Supp. Mod. Amp.	— —	750	250	10	500 750 750	250 250 250	-60 Δ -60 Δ -65 Δ	100 100 55	16 16 29	6.0 6.0 6.0	.55 .55 .60	34 53 16.5	2E22
2E24	13.5	VHF beam power amplifier. Filament type for mobile service.	7CL	8-pin O.	3 $\frac{1}{2}$ $\frac{1}{32}$	1 $\frac{1}{16}$	Oxide Fil.	6.3	0.65	CP* CT*	6.5 6.5	500 600	200 200	2.3 2.5	400 500 400 600	180 180 200 195	-45 -45 -45 -50	50 54 75 66	8 8 10 10	2.5 2.5 3.0 3.0	.15 .16 .19 .21	13.5 18 20 27	2E24
2E25A	15 10	Beam power pentode with a quick heating filament for mobile service.	5BJ	8-pin O.	4 $\frac{1}{16}$	1 $\frac{1}{16}$	Oxide Fil.	6.0	0.7	CT CP	100 100	450 400	250 225	4.0 2.7	450 450 400	250 250 225	-45 -70 -70	75 75 60	15 15 8.5	3.0 3.0 3.0	.27 .36 .33	20 22 75	2E25A
2E26	13.5	High efficiency beam power pentode with full ratings up to 125 Mc.	7CK	8-pin O.	3 $\frac{1}{2}$ $\frac{1}{32}$	1 $\frac{1}{16}$	Htr.	6.3	0.8	CT* CP*	125 125	600 500	200 200	2.5 2.3	600 500	185 180	-45 -50	66 54	10 9	3.0 2.5	.17 .15	27 18	2E26
2E30	6.6 10 10	Quick heating beam power pentode for AF application and RF power use with full ratings up to 160 Mc in mobile service.	7CQ	7-pin Min.	2 $\frac{1}{8}$	$\frac{1}{4}$	Oxide Fil.	6.0	0.65	CP CP CT Doubler AB ₂ Audio*	165 165 165	200 300 300 300	200 250 250 275	2.5 2.5 2.5 2.5	200 300 300 250	200 250 225 250	-46 -70 -70 -30	45 50 45 120	10 5.5 3.8 2.3	2.3 0.7 0.7 2.3	.15 1.7 .20 .20	5 6 4.5 17	2E30
3A4	2 2	Power pentode capable of delivering 1.2 watts power output at 10 Mc in RF amplifier service. Dry cell type.	7BB	7-pin Min.	2 $\frac{1}{8}$	$\frac{1}{4}$	Oxide Fil.	2.8 1.4	0.1 0.2	Class A Amp. RF Power Amp.	10	150 150	90 135	0.4 0.9	150 150	90 135	-8.4 RG = 0.2 meg	13.3 18.3	2.2 6.5	— 0.13	— —	0.7 1.2	3A4
3B4	3	VHF beam power amplifier for portable equipment. Full ratings to 100 Mc.	7CY	7-pin Min.	2 $\frac{1}{8}$	$\frac{1}{4}$	Oxide Fil.	2.5 1.25	0.165 0.33	CT	100	150	135	1.1	90 150	90 135	-18 -38	15 25	4.8 6.2	0.4 0.55	0.03 0.07	.45 1.25	3B4

TABLE V. (continued) Power Tetrodes, Pentodes, and Beam Tubes

TYPE	Max. Plate Watts	DESCRIPTION	CONSTRUCTION						CATHODE		SERVICE	MAX. RATINGS (CCS unless noted) □						TYPICAL OPERATION					TYPE								
			Basing	Base	Length, Inches	Diameter, Inches	Heater - Filament Volts	Amperes	APPLICATION ▲	Frequency in Mc for Full Input		Plate Volts	Screen Volts	Screen Volts	Plate Volts	Screen Volts	Grid Volts	Plate Mod	Screen Mod	Grid Mod, D-C	Drive Watts	Output Watts									
3D21A	15	High vacuum pulse modulator and blocking oscillator.	6BU	8-pin O.	4 1/16	1 1/16	Htr.	6.3 12.6	1.7 0.85	Pulse Modulator Characteristics (Static)	—	3500	850	3.0	Transient Peak Plate = 5000 V; P _{CL} = 0.5 W; Pulse = 10 μs 3500 800 —150 600 300 —30 30 R _L = 450 ohms; 21000 E sig = 150 V G _m = 5500 μmhos					3D21A											
3E29	15	High perveance, twin unit beam power tube for rectangular wave pulse modulator service.	7BP	7-pin Septar	4 1/16	2 3/8	Htr.	6.3 12.6	2.25 1.125	Modulator Service	MAXIMUM RATINGS FOR RECTANGULAR WAVE MODULATOR SERVICE (Units in parallel) Duty Factor between .0001 and 1.0 D-C Plate Supply Volts = 5000 V Peak Current = 10 A Averaging Time = 1200 μs Plate Input = 85 W Plate Dissipation = 15 W													3E29							
4X150A	100	Forced air cooled UHF tetrode for use as a power amplifier or oscillator, and as a wide-band video amplifier in TV transmitters. Typical operation up to 165 Mc.	4X150A	Spec.	2 1/32	1 1/32	Htr.	6.0	2.6	CP (55% Mod.) CT (55% Mod.)	500	1000	300	12	400 1000	250 250	-90 -105	200 200	40 20	15 7	2 1	55 140	4X150A								
4X150D	100	Forced air cooled UHF tetrode. Same as 4X150A except for heater characteristics.	4X150D	Spec.	2 1/32	1 1/32	Htr.	26.5	0.57	CP (55% Mod.) CT (55% Mod.)	500	1000	300	12	400 1000 1250	250 250 250	-90 -105 -90	200 200 200	40 20 20	15 7 11	2 1 1.2	55 140 195	4X150D								
6AN5	4.2	Pentode power amplifier for wide-band RF or video service. Operates on low plate voltage.	7BD	7-pin Min.	2 1/8	3/8	Htr.	6.3	0.5	A ₁ Audio	—	120	120	1.4	120	120	—	35	12	—	—	1.3	6AN5								
6V6GT	8	Beam power pentode. Rugged 6V6GT with low-loss phenolic base.	7AC	7-pin O.	3 1/16	1 1/16	Htr.	6.3	0.45	CT	10	350	250	2.0	350	250	-100	47	7	5	—	11	6V6GT								
12A6	—	Beam power amplifier.	7AC	7-pin O.	3 1/16	1 1/16	Htr.	12.6	0.15	A ₁ Audio	250	250	7.5	1.5	250	250	-12.5	32	3.5	—	—	3.4	12A6								
											A-C Plate Ohms = 70000											G _m = 3000 μmhos					Load Ohms = 7500				

HY69	25 30	Quick heating beam power pentode for use in AF and RF mobile service. Has a 5-pin medium base.	5J	5-pin	5%	2 1/16	Thor. Fil.	6.0	1.6	CP CT	60 60	600 600	300 300	3.3 5.0	600 500 500 400	250 250 250 250	-100 -100 -100 -100	100 100 83 80	12.5 12.5 12.5 12.5	6.0 6.0 5.5 5.5	1.0 1.0 0.9 0.9	42 33 29 22.5	HY69
802	6.7	Power pentode featuring high output with low driving power. Small cap with medium 7-pin bayonet base.	6BM	7-pin	5%	2 1/16	Htr.	6.3	0.9	CP (E _{c3} = 40 V) CT (E _{c3} = 0 V)	30 30	400 500	200 250	4.0 6.0	400 500	195 250	-40 -100	35 45	17 12	1.5 2	0.1 0.25	8 16	802
807	16.5	Air cooled beam power amplifier. Features low grid driving power and high power sensitivity. Has a medium 5-pin base.	5AW	5-pin	5%	2 1/16	Htr.	6.3	0.9	CP CT	60 60	475 600	300 300	2.5 3.5	475 325 600 400	225 225 250 250	-85 -75 -45 -45	83 80 100 100	5 5 7 7.5	4 3 3.5 3.5	0.4 0.25 0.2 0.2	27.5 17.5 40 25	807
813	67 100	Beam power amplifier designed for use as a high power final amplifier with extremely high power sensitivity. Neutralization is unnecessary in adequately shielded circuits.	5BA	7-pin	7 1/2%	2 1/16	Thor. Fil.	10.0	5.0	CP CT	30 30	1600 2000	400 400	15 22	1600 2000	300 400	-160 -120	150 180	30 45	12 10	2.7 1.9	180 275	813
814	50 65	Beam power amplifier with a zirconium coated anode, medium 5-pin micanol base and small cap.	5J	5-pin	7 1/16%	2 1/16	Thor. Fil.	10.0	3.25	CP* CT	30 30	1250 1500	400 400	6.7 10	1250 1500	300 300	-150 -90	144 150	1.0 15	1.8 1.5	2.0 1.5	130 160	814
815	20 25	Double beam pentode for low power amateur or commercial transmitters with full ratings up to 150 Mc.	8BY	8-pin O.	4 1/16%	2 1/16	Htr.	6.3 12.6	1.6 0.8	CP* CT*	150 150	325 400	225 225	4.0 4.5	325 400	165 145	-45 -45	123 150	16 17	4 4.5	0.2 0.23	30 44	815
828	47 70 70	Beam power amplifier for class AB ₁ audio amplifier service or RF amplifier service. Low driving power requirements. Medium micanol base.	5J	5-pin	7 1/16%	2 1/16	Thor. Fil.	10.0	3.25	CP CT AB ₁ Audio*	30 30	1000 1250 1750	400 400 750	11 16 16	1000 1250 1700	400 400 750	-140 -95 -120	135 160 248	23 35 43	10 12 E _{c3} = 60 V	2.1 2.1 300	100 150 300	828
829B	21 30	Double beam pentode with full ratings up to 200 Mc and up to 250 at 89% ratings.	7BP	7-pin Septar	3 1/16%	2 1/16	Htr.	6.3 12.6	2.25 1.125	CP* CT*	200 200	600 750	225 225	7 7	600 750	200 200	-70 -50	112 120	26 34	8 8	0.6 0.45	50 65	829B
832A	10	Double beam pentode having high efficiency at very high frequencies. Full ratings up to 250 Mc.	7BP	7-pin Septar	3 1/16%	2 1/16	Htr.	6.3 12.6	1.6 0.8	CP CT	200 200	600 750	250 250	3.4 5.0	600 750	200 200	-65 -65	36 48	16 15	2.6 2.8	0.16 0.19	17 26	832A
837	8 12	Pentode for use as an RF amplifier, a frequency multiplier or oscillator. Medium micanol bayonet base.	6BM	7-pin	5%	2 1/16	Htr.	12.6	0.7	CP (E _{c3} = 40 V) CT (E _{c3} = 40 V)	20 20	400 500	200 200	5 8	400 500	140 200	-40 -75	45 60	20 15	5 4	0.3 0.4	11 22	837
HY1269	30	Quick heating pentode for portable and mobile equipment.	5BL	5-pin	5%	2 1/16	Thor. Fil.	6.0 12.0	3.2 1.6	CT CP	60 60	750 600	300 300	5 3.3	750 600	300 250	-100 -100	120 100	15 12.5	6 6	0.9 0.9	63 42	HY1269

TABLE V. (continued) Power Tetrodes, Pentodes, and Beam Tubes

TYPE	Max. Plate Watts	DESCRIPTION FEATURES AND NOTES	CONSTRUCTION					CATHODE	SERVICE	MAX. RATINGS (CCS unless noted) □							TYPICAL OPERATION					TYPE	
			Basing	Base	Length, Inches	Diameter, Inches	Heater—Filament			Volts	Amps	APPLICATION ▲	Frequency in Mc for Full Input	Plate Volts	Screen Volts	Screen Watts	Plate Volts	Screen Volts	Grid Volts	Plate Ma†	Screen Ma†		Grid Ma, D-C
1614	14	Beam power pentode in metal envelope. Full ratings up to 80 Mc.	7AC	7-pin O.	4 $\frac{1}{16}$	1 $\frac{1}{8}$	Htr.	6.3	0.9	CP CT	80 80	375 375	300 300	2.5 3.5	325 375	245 250	-40 -40	70 80	8 10	2 2	0.1 0.1	15 21	1614
1622	13.8	Beam power pentode, similar to type 6L6, for applications requiring continuous service.	7AC	7-pin O.	4 $\frac{1}{16}$	1 $\frac{1}{8}$	Htr.	6.3	0.9	A ₁ P-P Audio★	—	300	250	1.4	300	250	-20	86	4	—	—	10	1622
1624	16.5 25	Quick heating beam pentode for medium power AF and RF service. Except for having a filament, it is similar to type 807.	4BE	5-pin	5 $\frac{1}{4}$	2 $\frac{1}{16}$	Fil.	2.5	2.0	CP CT	60 60	500 600	300 300	2.5 2.5	500 600	275 300	-50 -60	75 90	9 10	3.3 5	0.25 0.43	24 35	1624
1625	16.5	Identical to type 807 except for 12.6-volt heater and its base.	5AZ	7-pin	5 $\frac{1}{4}$	2 $\frac{1}{16}$	Htr.	12.6	0.45		Maximum ratings and typical operation same as for type 807.										1625		
5516	15	Quick heating pentode for VHF mobile equipment.	7CL	8-pin O.	3 $\frac{1}{32}$	1 $\frac{1}{16}$	Oxide Fil.	6.0	0.7	AB ₂ Audio★ CP CT	— 80 156	600 475 600	250 250 250	5.0 3.3 5.0	600 475 450	250 250 250	-25 -90 -40	140 63 75	24 10 15	4 4 2	0.16 0.5 2.0	10.5 22 21	5516
5763	12 12 12 8	Beam power pentode for mobile transmitters or low-power stages of fixed transmitters. Used in doubler or tripler service.	9K	9-pin Min.	2 $\frac{1}{8}$	$\frac{1}{8}$	Htr.	6.0	0.75	CT CT Doubler CT Tripler CP	50 175 175 30	300 300 300 250	250 250 250 1.5	2.0 2.0 2.0 1.5	300 300 300 250	250 250 250 250	-60 -75 -100 -39	50 40 35 40	5.0 4.0 5.0 1.0	3 1.0 1.0 1.0	0.35 0.6 0.6 0.05	7 2 1.3 6.4	5763
5812	10	Quick heating beam pentode for mobile or portable equipment.	7CQ	7-pin Min.	2 $\frac{1}{8}$	$\frac{1}{4}$	Oxide Fil.	6.0	0.65	CT Static	160 —	300	250	2.5	300 250	200 250	-45 -24.5	55 40	3.0 1.8	0.75 R _p = 63K	1.5 G _m = 4300	7 —	5812
5881	23 23 23	Beam pentode, shock and vibration resistant. Used in high fidelity amplifiers, etc. Electrically similar to type 6L6.	7AC	7-pin O.	3 $\frac{1}{32}$	1 $\frac{1}{16}$	Htr.	6.3	0.9	A ₁ Audio AB ₁ Audio★ AB ₂ Audio★	— — —	400 400 400	400 400 400	3.0 3.0 3.0	350 360 360	250 270 270	-18 -22.5 -22.5	65 140 205	8.5 11.0 16.0	G _m = 5200 — —	— — —	11.3 18 47	5881

5894	27 40 40	Double beam pentode for push-pull RF or tripler service. 120 watts input up to 250 Mc and 100 watts input up to 470 Mc.	5894	7-pin Septar	4 1/16	1 3/16	Htr.	6.3 12.6	1.8 0.9	CP★ CT & FM★ CT Tripler	250 250 462	450 600 400	250 250 220	4.5 7.0 7.0	450 600 400	250 250 220	-100 -80 -175	150 200 140	16 16 5	5 2 5	0.6 4 8	50 85 16	5894
6146	20 20 20 13.3	VHF beam pentode for RF amplifier and oscillator service, and modulator service. Full ratings to 60 Mc and 66% rating to 175 Mc.	7CK	8-pin O.	3 1/16	1 2 3/32	Htr.	6.3	1.25	AB ₁ Audio★ CT CT CP	60 175 60	600 600 600 480	250 250 250 250	3.0 3.0 3.0 2.0	600 600 320 475	180 150 180 135	-45 -58 -51 -77	200 112 140 94	23 9 10 6.4	R _F = 7K 2.8 2.0 2.8	0.2 0.2 3.0 0.3	82 52 25 34	6146
6216	10	High perveance beam pentode for filter reactor service, regulated supply pass tube, RF amplifier etc. Rugged construction.	9CE	9-pin Min.	2 3/8	3/8	Htr.	6.3	1.2	Filter Reactor CT CT Doubler	50 50	300 300 300	200 200 200	1.0 1.0 1.0	100 300 300	100 150 150	-3 -50 -75	72 63 50	3 8 6	R _F = 18.5K 2.0 1.0	G _m = 12800 0.3 0.6	8.8 8.8 4.0	6216
6524	13.5 20	Double beam pentode for RF amplifier or tripler service up to 470 Mc.	6524	7-pin Septar	3 3/16	1 1 1/16	Htr.	6.3	1.25	CP★ CP★ CT★	100 462 100	400 300 500	300 300 300	2.0 3.0 3.0	400 300 500	200 200 200	-61 -60 -44	100 75 120	7 4 8	2.5 1.0 3.7	0.2 0.3 0.2	31 9 46	6524
6669	12 12	Beam power pentode for AF application in mobile equipment. Electrically equivalent to the 6AQ5.	7BZ	7-pin Min.	2 3/8	3/8	Htr.	6.3	0.45	A ₁ Audio AB ₁ Audio★		250 250	250 250	2.0 2.0	250 250	250 250	-12.5 -15	45 79	45 13	-	-	4.5 10	6669
6792	25	Beam tetrode for high voltage control in the range from 5000 to 25000 volts	8GL	8-pin O.	5 1/16	1 2 3/32	Htr.	6.3	0.45	Shunt Regulator Characteristics	Tetrode Triode	25K 25K	350 -	1.0	25K 25K	200 -	-18 -8.4	1.0 1.0	0.1	-	-	-	6792

▲ Explanation of abbreviations in APPLICATION column:

A₁ Audio — Class A₁ Audio Frequency Amplifier or Modulator.
 AB₁ Audio — Class AB₁ Audio Frequency Amplifier or Modulator.
 AB₂ Audio — Class AB₂ Audio Frequency Amplifier or Modulator.
 CT — Class C Telegraphy Power Amplifier and Oscillator.
 CP — Class C Plate Modulated Amplifier (100% Modulation).

†Current for audio applications is at maximum signal input.

★ Push-pull operation, values for two tubes or two units.

□ CCS — Continuous Commercial Service.

*Intermittent Mobile Service.

△E_{c3} for CT operation is 22.5 V; E_{c3} for suppressor modulated amplifier is -90 V.

NOTE: If ICAS (Intermittent Commercial and Amateur Service) ratings and operation are required, write to Technical Information Service, CBS-Hytron, Danvers, Mass.

TABLE VI.

CBS POWER TRIODES

TYPE	DESCRIPTION	CONSTRUCTION				CATHODE		USE	MAX. RATINGS (Absolute Max.) ▲					CHARACTERISTICS—TYPICAL OPER.							TYPE			
		Basing	Base	Length, inches	Diameter, inches	Filament*	Volts		Amps	APPLICATION†	Frequency in Mc for Full Input	Plate Volts	D-C Input Watts	Plate Dissipation Watts	Plate Volts	Grid Volts	Peak Grid Volts	Plate Amps	Grid Amps, D-C	Plate-to-Plate Load Resistance Ohms		Amplification	Driving Watts	Output Watts
3A5	Medium- μ duotriode capable of delivering 2 watts power output at 40 Mc in push-pull class C service. Powered by dry cells. Values are for each unit.	7BC	7-pin Min.	2 $\frac{1}{8}$	$\frac{1}{4}$	Oxide Fil.	1.4 2.8	0.22 0.11	A Audio★ CT★	— 40	135 135	— 2.0	0.5 1.0	90 135	-2.5 -20	90	.0037 03	.0022 .0065	— —	15 —	— 0.2	— —	— —	3A5
801A	Medium- μ triode with bayonet base. Especially for use in small aircraft transmitters. Air cooled.	4D	4-pin	5 $\frac{1}{8}$	2 $\frac{1}{16}$	T.T.	7.5	1.25	B CP CT	— 60 60	600 500 600	42 30 42	20 13.5 20	600 500 600	-75 -190 -150	320	.008 .055 .065	— .015 .015	10000 — —	8 — —	3 4.5 4	45 18 25	801A	
805	High- μ , zero bias class B modulator having high power output at low-plate voltage. Jumbo base and medium cap. Air cooled.	3N	4-pin	8 $\frac{1}{2}$	2 $\frac{1}{16}$	T.T.	10	3.25	B CP CT	— 30 30	1500 1250 1500	315 220 315	125 85 125	1500 1250 1500	-16 -160 -105	280	.084 16 20	— .06 .04	8200	Var- iable —	7 16 8.5	370 140 215	805	
809	Air cooled, high perveance, high- μ type having high efficiency but requiring only low driving power. Medium micanol bayonet base and medium cap.	3G	4-pin	6 $\frac{1}{16}$	2 $\frac{1}{16}$	T.T.	6.3	2.5	B□ CP□ CT□	— 60 60	1000 750 1000	100 75 100	30 25 30	1000 750 1000	-16 -60 -75	156	.04 .10 .10	.032 — .025	11600 — —	50 — —	2.7 4.3 2.8	145 55 75	809	
810	Air cooled, high perveance type with high plate efficiency but requiring only low driving power and relatively low plate voltage. Has a jumbo base, skirted end cap, and medium side cap.	2N	4-pin	8 $\frac{1}{4}$	2 $\frac{1}{4}$	T.T.	10	4.5	B□ CP□ CT□	— 30 30	2750 2000 2500	510 500 750	175 125 175	2250 2000 2500	-60 -350 -180	380 550 350	.07 .25 .30	— .07 .06	11600 — —	36 — —	13 35 19	725 380 575	810	
811A	Improved 811. Plate design increases dissipation capability and ratings for plate current and input. Air cooled type with medium micanol base, medium cap, and zirconium coated plate.	3G	4-pin	6 $\frac{1}{32}$	2 $\frac{1}{16}$	T.T.	6.3	4.0	B□ CP□ CT□	30 30	1500 1250 1500	235 175 260	65 45 65	1500 1250 1500	-4.5 -120 -70	170 250 330	.032 .14 .173	— .045 .173	12400 — —	160 — —	4.4 10 7.1	340 135 200	811A	

826	Air cooled UHF type with high efficiency. Has a center-tapped filament, zirconium coated plate, and a medium molded-flare base.	7B0	7-pin Septar	3 ¹ / ₁₆	2 ¹ / ₁₆	T.T.	7.5	4.0	CP CT	250 250	1000 1000	95 130	45 55	1000 1000	-160 -70	320 183	.095 .13	.04 .035	— —	31 —	11.5 5.8	70 90	826
833A	Forced air cooled, 100 watt triode with a zirconium plated anode and special post terminals.	833A	Spec.	8 ¹ / ₁₆	4 ¹ / ₁₆	T.T.	10	10	B CP CT	— 30 30	3000 2500 3000	1125 835 1250	300 200 300	3000 2500 3000	-70 -300 -200	400 460 360	0.1 .335 .415	— .075 .055	— — —	— — —	20 30 20	1650 635 1000	833A
838	Air cooled, high mu zero bias class B modulator with high power output and low distortion. Jumbo base.	4E	4-pin	7 ¹ / ₁₆	2 ¹ / ₁₆	T.T.	10	3.25	B CP CT	— 30 30	1250 1000 1250	220 175 220	100 67 100	1250 1000 1250	0 -135 -90	200 255 200	.148 .15 .15	— .06 .03	9000 — —	Variable 16 6	7.5 100 130	260 100 130	838
845	Air cooled modulator and AF power amplifier. Jumbo base.	4E	4-pin	7 ¹ / ₁₆	2 ¹ / ₁₆	T.T.	10	3.25	AB ₁ Audio	—	1250	150	100	1250	-225	440	.04	—	6600	5.3	—	115	845
5513	Forced air cooled, grounded-grid RF amplifier and oscillator capable of dissipating 1200 watts. Full ratings up to 220 Mc.	5513	Spec.	7 ¹ / ₂	3	T.T.	6.3	30	CBT CT	220 —	3000 4000	3300 3600	1200 1200	2000 3750	-20 -150	240 250	.967 .94	.18 .159	— —	220 —	223 377	1125 2690	5513
5514	All-purpose power triode with high mu allowing low or zero bias operation. Replaces types HY30Z, HY40, HY40Z, HY51A, HY51B and HY51Z.	4B0	4-pin	6 ¹ / ₁₆	2 ¹ / ₁₆	T.T.	7.5	3.0	CT CP B	60	1500	262.5	65	1500 1250 1500	-106 -84 -4.5	197 172 146	.175 .142 .35	.06 .06 .088	— — 10500	— — —	12 10 6.5	200 135 400	5514
5518	Transmitting triode for use as a grounded-grid class C RF amplifier.	5518	Spec.	11 ¹ / ₁₆	5 ¹ / ₂	T.	6.3	235	CT	—	7000	12000	4000	6600	-520	940	1.3	0.20	—	145	180	6500	5518

†Explanation of abbreviations in APPLICATION column:

A Audio — Class A Audio Frequency Amplifier or Modulator.
 AB₁ Audio — Class AB₁ Audio Frequency Amplifier or Modulator.

B — Class B Push-Pull Audio Frequency Modulator.
 CBT — Class B Television.
 CP — Class C Plate Modulated Amplifier (100% Modulation).
 CT — Class C Telegraphy Power Amplifier and Oscillator.

★ Design Center Values.
 * Thoriated tungsten filament (T.T.); pure tungsten filament (T.).
 □ ICAS (Intermittent Commercial and Amateur Service).
 ▲ Values shown are CCS (Continuous Commercial Service) unless otherwise noted.

TABLE VII.

CBS RECEIVING TUBES (Special Application)

TYPE	DESCRIPTION	CONSTRUCTION			CATHODE		SERVICE APPLICATION	CHARACTERISTICS AND TYPICAL OPERATION										TYPE		
		Basing	Base	Length, inches	Diameter, inches	Heater—Filament		Volts	Amperes	Plate Supply Volts	Grid 1 Volts	Grid 2 Supply Volts	Plate Ma	Grid 2 Ma	A-C Plate Resistance, Ohms	Transconductance	Amplification		Load Resistance, Ohms	Output Watts
6AJ5	Sharp cutoff pentode voltage amplifier. 28-volt-plate version of type 6AK5.	7BD	7-pin Min.	1 $\frac{1}{2}$	$\frac{3}{4}$	Htr.	6.3	0.175	RF Amp.	28	-1.0	28	2.7	1.0	100,000	2500	—	—	—	6AJ5
6AS6	Sharp cutoff pentode with grid 1 & grid 3 control for application in delay circuits, gated amplifier circuits and gain controlled amplifier circuits.	7CM	7-pin Min.	1 $\frac{1}{2}$	$\frac{3}{4}$	Htr.	6.3	0.175	Class A Amp.	120	-2.0	120	5.2	3.5	110,000	3200	—	—	—	6AS6
6AS7G	Low- μ duotriode with high perveance and an A-C plate resistance of 280 ohms. Used as a regulator tube in d-c power supplies, a d-c amplifier, etc.	8BD	8-pin O.	5 $\frac{1}{16}$	2 $\frac{1}{16}$	Htr.	6.3	2.5	D-C Amp.	Plate Volts = 250 Plate Ma = 125 Grid Circuit Resistance for Cathode Bias Op. = 1 meg. Maximum Ratings Plate Diss. = 13 Peak Heater — Cathode Volts = + or - 300										6AS7G
12AY7	Medium- μ duotriode for application in the first stages of audio amplifiers.	9A	9-pin Min.	2 $\frac{1}{16}$	$\frac{3}{8}$	Htr.	12.6 6.3	0.15 0.3	Class A Amp.	250	-4.0	—	3.0	—	22,800	1750	40	—	—	12AY7
26A7GT	Twin beam power tube for use with low voltage B+ power supplies.	8BU	8-pin O.	3 $\frac{1}{16}$	1 $\frac{1}{32}$	Htr.	26.5	0.6	Class A Amp.* AB ₁ Audio	26.5 26.5	-4.5 -7.0	26.5 26.5	20 19	1.9 2.0	—	5700	—	1500 2500	0.18 0.5	26A7GT
1620	Sharp cutoff pentode similar to 6J7. For use where microphonics is critical. Metal type with a miniature cap.	7R	7-pin O.	3 $\frac{1}{8}$	1 $\frac{1}{16}$	Htr.	6.3	0.3	Class A Amp. (Pentode)	100 250	-3.0 -3.0	100 100	— 5.3	0.5 0.5	1 meg > 1 meg	1185 1225	—	—	—	1620
1635	High- μ power duotriode for Class B amplifier applications.	8B	8-pin O.	3 $\frac{1}{16}$	1 $\frac{1}{16}$	Htr.	6.3	0.6	Class B Amp.†	300	0	—	6.6	—	1,000	—	—	12,000	10.4	1635
5879	Sharp cutoff pentode used as an audio amplifier in which reduced hum, microphonics, leakage and noise are desirable.	9AD	9-pin Min.	2 $\frac{1}{16}$	$\frac{3}{8}$	Htr.	6.3	0.15	Class A Amp. (Pentode) Class A Amp. (Triode)†	250 100	-3.0 -3.0	100 —	1.8 2.2	0.4 —	2 meg 17,000	— 1240	— 21	— —	— —	5879
6072	Low noise, low microphonic duotriode used primarily in the low-level stages of high gain AF amplifiers	9A	9-pin Min.	2 $\frac{1}{16}$	$\frac{3}{8}$	Htr.	6.3 12.6	0.35 0.175	Class A Amp.* Low Level Amp.*	250 150	-4.0 —	— 3.0	— —	— —	25,000	1750	44	—	—	6072

*Values are for two units.

†Grids 2 and 3 tied to plate.

*Each unit.

TABLE VIII.

CBS RECEIVING TUBES (Military and Industrial)

TYPE	DESCRIPTION	CONSTRUCTION				CATHODE				MAX. RATINGS (Design Center)		USE	CHARACTERISTICS—TYPICAL OPER.												
		Basing	Base	Length, inches	Diameter, inches	Heater—Filament Volts	Ampere	Plate Volts	Screen Volts	Plate Watts	Screen Watts		APPLICATION	Plate Volts	Screen Volts	Grid Volts, D-C	Plate Ma	Screen Ma	Plate Resistance Ohms	Transconductance	Load Resistance Ohms	Amplification	Output Watts	TYPE	
6AU6WA	Sharp cutoff pentode RF or IF amplifier where reliable operation is required.	7BK	7-pin Min.	2 $\frac{1}{8}$	$\frac{1}{4}$	Htr.	6.3	0.3	300	150	3.0	.65	Class A Amp.	250	150	68 Δ	10.6	4.3	1 meg	5200	—	—	—	6AU6WA	
6SL7WGT	Rugged high- μ duotriode for RC amplifier or phase inverter service.	8BD	8-pin O.	3 $\frac{3}{16}$	1 $\frac{1}{32}$	Htr.	6.3	0.3	250	—	1.0†	—	Class A Amp.†	250	—	—2	2.3	—	44,000	1600	—	70	—	6SL7WGT	
6SN7WGT	Rugged medium- μ duotriode for voltage amplifier or phase inverter service.	8BD	8-pin O.	3 $\frac{3}{16}$	1 $\frac{1}{32}$	Htr.	6.3	0.6	300	—	2.5†	—	Class A Amp.†	90 250	—	0 —8	10 9	—	6,700 7,700	3000 2600	—	20 20	—	6SN7WGT	
12AT7WA	Medium- μ duotriode high frequency oscillator and mixer for service where reliability of performance is desired.	9A	9-pin Min.	2 $\frac{1}{16}$	$\frac{1}{8}$	Htr.	6.3 12.6	.30 .15	300	—	2.5†	—	Class A Amp.†	250 180	—	—2 —1	10 11	—	10,900 9,400	5500 6000	—	60 62	—	12AT7WA	
1621	Power pentode for applications where continuity of service is required.	7S	7-pin O.	3 $\frac{1}{4}$	1 $\frac{1}{16}$	Htr.	6.3	0.7	300	300	7.9	1.9	Push-Pull Class A Amp.‡	300	300	—30	38	6.5	—	—	4000 Δ	—	—	—	1621
5636	Subminiature dual-control pentode for use as a gated or gain-controlled amplifier.	8DC	Submin.	Bulb 1.375	$\frac{1}{16}$	Htr.	6.3	0.15	165	155	.55	.45	Class A Amp.	100	100	150 Δ	5.6	4	110,000	3200	—	—	—	5636	
5654	High-frequency pentode amplifier similar to type 6AK5, designed for military use.	7BD	7-pin Min.	1 $\frac{1}{4}$	$\frac{1}{4}$	Htr.	6.3	0.175	180	140	1.5	0.5	Class A Amp.	120	120	—2	7.5	2.5	.3 meg	5000	—	—	—	5654	
5654/6AK5W	High-frequency pentode amplifier similar to type 6AK5, designed for military use.	7BD	7-pin Min.	1 $\frac{1}{4}$	$\frac{1}{4}$	Htr.	6.3	0.175	180	140	1.5	0.5	Class A Amp.	120	120	—2	7.5	2.5	.3 meg	5000	—	—	—	5654/6AK5W	
5654/6AK5W/6096	Reliable USAF version of type 5654.	7BD	7 pin Min.	1 $\frac{1}{4}$	$\frac{1}{4}$	Htr.	6.3	0.175	180	140	1.5	0.5	Class A Amp.	120	120	—2	7.5	2.5	.3 meg	5000	—	—	—	5654/6AK5W/6096	
5670	Medium- μ duotriode, Military or industrial version of type 2C51.	8CJ	9-pin Min.	1 $\frac{1}{4}$	$\frac{1}{8}$	Htr.	6.3	0.35	300	—	1.5†	—	Class A Amp.†	150	—	240 Δ	8.2	—	—	5500	—	35	—	5670	

TABLE VIII. (continued) Receiving Tubes - Military and Industrial

TYPE	DESCRIPTION FEATURES AND NOTES	CONSTRUCTION				CATHODE				MAX. RATINGS (Design Center)				USE APPLICATION	CHARACTERISTICS—TYPICAL OPER.								TYPE	
		Basing	Base	Length, inches	Diameter, inches	Heater—Filament Volts	Amperes	Plate Volts	Screen Volts	Plate Watts	Screen Watts	Plate Volts	Screen Volts		Grid Volts, D-C	Plate Ma	Screen Ma	Plate Resistance Ohms	Transconductance Ohms	Load Resistance Ohms	Amplification	Output Watts		
5686	Beam power pentode for AF or RF service up to 160 Mc. Rugged construction for critical industrial and military applications.	9G	9-pin Min.	2 3/16	3/8	Htr.	6.3	0.35	250	250	7.5	3.0	Class A Amp. Class C Amp.	250 250	-12.5 -50	27 40	3.0 10.5	45000 R _{K1} = 25000	— Drive = 0.15W	— —	— —	— —	— 6.5	5686
5687	Medium- μ duotriode. General purpose amplifier with high perveance and high emission.	9H	9-pin Min.	2 3/16	3/8	Htr.	6.3	0.9	300	—	4.2† 7.5‡	—	Class A Amp.	250 120	— -2	-12.5 36	12.5 36	— —	3,000 1,700	5500 11000	— —	16.5 36	— —	5687
5691	High- μ duotriode. Long-life 6SL7GT for use in industrial applications.	8BD	8-pin D.	2 1/8	1 9/32	Htr.	6.3	0.6	250	—	0.9†	—	Class A Amp.†	250	—	-2	2.3	—	44,000	1600	—	70	—	5691
5692	Medium- μ duotriode. Long-life 6SN7GT for industrial service.	8BD	8-pin D.	2 3/8	1 9/32	Htr.	6.3	0.6	250	—	1.6†	—	Class A Amp.†	250	—	-9	6.5	—	9,100	2200	—	20	—	5692
5693	Reliable, long-life sharp-cutoff pentode, improved 6SJ7.	8N	8-pin D.	2 3/8	1 9/16	Htr.	6.3	0.3	300	125	2.0	0.3	Class A Amp.	250	100	-3	3.0	.00085	1 meg	1650	—	—	—	5693
5718	Rugged subminiature medium- μ triode for service up to 500 Mc.	8DK	Submin.	Bulb 1.375	0.4	Htr.	6.3	0.15	150	—	0.8	—	Class A Amp.	100 150	—	150△ 180△	8.5 13	—	4,650 4,150	—	—	27 27	—	5718
5719	Rugged subminiature high- μ triode for AF service.	8DK	Submin.	Bulb 1.375	0.4	Htr.	6.3	0.15	150	—	0.09	—	Class A Amp.	150	—	680△	1.7	—	26,000	—	—	70	—	5719
5725	Reliable sharp-cutoff dual-control pentode for use in gated or gain controlled amplifier.	7CM	7-pin Min.	1 3/8	3/8	Htr.	6.3	0.175	180	140	1.5	0.5	Class A Amp.	120	120	-2	5.2	3.5	—	3200	—	—	—	5725
5725/6AS6W	Reliable sharp-cutoff dual-control pentode for gated amplifier use.	7CM	7-pin Min.	1 3/8	3/8	Htr.	6.3	0.175	180	140	1.5	0.5						Same as 5725						5725/6AS6W
5725/6AS6W/6187	Reliable USAF version of type 5725	7CM	7-pin Min.	1 3/8	3/8	Htr.	6.3	0.175	180	140	1.5	0.5						Same as 5725						5725/6AS6W/6187

5749	Remote cutoff pentode for RF or IF service. It is the reliable version of type 6BA6.	7BK	7-pin Min.	2½	¼	Htr.	6.3	0.3	300	140	3.0	0.6	Class A Amp.	250	100	68△	11	4.2	1 meg	4400	—	—	—	5749	
5749/6BA6W	Remote cutoff pentode for RF or IF service. It is designed for reliable operation in mobile and aircraft applications.	7BK	7-pin Min.	2½	¼	Htr.	6.3	0.3	300	140	3.0	0.6	Class A Amp.	250	100	68△	11	4.2	1 meg	4400	—	—	—	5749/6BA6W	
5750/6BE6W	Reliable 6BE6; pentagrid converter for military use.	7CH	7-pin Min.	2½	¼	Htr.	6.3	0.3	300	100	1.1	1.1	Converter	100 250	100 100	-1.5 -1.5	7.5 7.5	—	.4 meg 1.0 meg	455 475	—	—	—	5750/6BE6W	
5751	High- μ duotriode; reliable version of type 12AX7.	9A	9-pin Min.	2½	¼	Htr.	6.3 12.6	0.35 0.175	300	—	0.7†	—	Class A Amp.†	250	—	—3	1.0	—	58,000	1200	—	70	—	5751	
5814	Medium- μ duotriode which is a reliable version of type 12AU7.	9A	9-pin Min.	2½	¼	Htr.	6.3 12.6	0.35 0.175	300	—	2.75†	—	Class A Amp.	100 250	—	0 -8.5	11.8† 10.5†	—	6,250 7,700	3100 2200	—	19.5 17	—	5814	
5814A	Medium- μ duotriode tested for military use. Reliable version of 12AU7.	9A	9-pin Min.	2½	¼	Htr.	6.3 12.6	0.35 0.175	300	—	2.75†	—	Class A Amp.†	100 250	—	0 -8.5	11.8 10.5	—	6,250 7,700	3100 2200	—	19.5 17	—	5814A	
5814WA	Same as 5814A. Tested for military aircraft use. Reliable version of 12AU7.	9A	9-pin Min.	2½	¼	Htr.	6.3 12.6	0.35 0.175	300	—	2.75†	—												5814WA	
5902	Subminiature beam power pentode for dependable industrial or military operation.	8DE	Submin.	Bulb 1.75	.4	Htr.	6.3	0.45	150	140	3.6	.9	Class A Amp.	110	110	270△	30	2.2	15,000	4200	3000	—	1.0	5902	
6005	Beam pentode specially designed to assure dependable life and reliable service.	7BZ	7-pin Min.	2½	¼	Htr.	6.3	0.45	250	250	12	2	Class A Amp. Class AB Push-Pull†	180 250 250	180 250 250	-8.5 -12.5 -15	30 47 35	4 7 13	58,000 52,000 60,000▲	3700 4400	5500 5000	— —	2.0 4.5 10	6005	
6005/6AQ5W	Reliable beam power pentode for military use.	7BZ	7-pin Min.	2½	¼	Htr.	6.3	0.45	250	250	12	2												6005/6AQ5W	
6005/6AQ5W/6095	Reliable USAF version of the 6005 beam power pentode.	7BZ	7-pin Min.	2½	¼	Htr.	6.3	0.45	250	250	12	2												6005/6AQ5W/6095	
6021	Subminiature medium- μ duotriode for general purpose applications where reliable performance is required.	8DG	Submin.	Bulb 1.375	.4	Htr.	6.3	0.30	150	—	1.0†	—	Class A Amp.†	100	—	150△	6.5	—	6,500	5400	—	35	—	6021	
6080	Reliable low- μ duotriode with reduced susceptibility to electrolysis.	88D	8-pin O.	4½	1 7/32	Htr.	6.3	2.5	230	—	13†	—	D-C Amp.†	135 250	—	250△ -200	125 10m	—	—	7000	—	—	—	6080	
6099	USAF version of 6101/6J6WA with balanced sections.								Same as 6101/6J6WA except maximum I_b difference of 0.25 ma when $I_{1b} = 1.0$ ma																6099

TABLE VIII. (continued) Receiving Tubes - Military and Industrial

TYPE	DESCRIPTION	CONSTRUCTION				CATHODE				MAX. RATINGS (Design Center)	USE	CHARACTERISTICS—TYPICAL OPER.								TYPE					
		Basing	Base	Length, inches	Diameter, inches	Heater—Filament Volts	Amperes	Plate Volts	Screen Volts			Plate Volts	Screen Volts	APPLICATION	Plate Volts	Screen Volts	Grid Volts, D-C	Plate Ma	Screen Ma		Plate Resistance Ohms	Transconductance Ohms	Load Resistance Ohms	Amplification	Output Watts
6101/6J6WA	Reliable 6J6 (duotriode) for military aircraft use. Electrically identical to type 6099 except that the sections are not balanced.	7BF	7-pin Min.	2½	¾	Htr.	6.3	0.45	300	—	1.6	—	Class A Amp. Class C Amp. and Osc. Mixer	100 150 150	— — —	50△ 10 810△	8.5 30 4.8	— — —	7,100 10,200	5300 G _c = 1900	— — —	38 — —	— — —	3.5 — —	6101/6J6WA
6111	Subminiature medium-mu duotriode for general purpose applications or high frequency oscillator-mixer service.	8DG	Submin.	Bulb 1.375	.4	Htr.	6.3	0.30	150	50	1.0†	—	Class A Amp.†	100	—	220△	8.5	—	4,000	5000	—	20	—	6111	
6112	Subminiature high-mu duotriode for dependable operation as a voltage amplifier or phase inverter.	8DG	Submin.	Bulb 1.375	.4	Htr.	6.3	0.30	150	50	0.5†	—	Class A Amp.†	100 150	—	1500△ 820△	.8 1.75	—	39,000 28,000	1800 2500	—	70 70	—	6112	
6134	Sharp-cutoff pentode with high transconductance for use in wide-band RF or IF amplifiers or as a video amplifier. Specially designed for dependability and reliability.	8N	8-pin O.	2½	1½ _s	Htr.	6.3	0.45	300	300	3.0	0.38	Class A Amp.	300	150	160△	10	2.5	1 meg	9000	—	—	—	6134	
6135	Rugged medium-high mu triode for use as a high frequency oscillator or a general purpose amplifier.	6BG	7-pin Min.	2½	¾	Htr.	6.3	0.175	300	—	3.5	—	Class A Amp.	100 250	— —	0 -8.5	11.8 10.5	—	6,250 7,700	3100 2200	—	19.5 17	—	6135	
6136	Sharp-cutoff, high-transconductance pentode for use in RF or IF amplifier applications. Specially designed and tested for dependability and reliability.	7BK	7-pin Min.	2½	¾	Htr.	6.3	0.30	300	300	3.0	0.65	Class A Amp.	100 250	100 150	150△ 68△	5 10.6	2.1 4.3	.5 meg 1.0 meg	3900 5200	—	—	—	6136	
6201	High-mu duotriode for VHF amplifier and converter applications.	9A	9-pin Min.	2½ _s	¾	Htr.	6.3 12.6	0.30 0.15	300	—	2.5	—	Grounded- Grid Amp.	100 250	— —	270△ 200△	3.3 10	—	14,500 10,900	4000 5500	—	57 60	—	6201	

6265	Sharp-cutoff pentode for wide-band, high frequency amplifier application.	7CM	7-pin Min.	2½	¾	Htr.	6.3	0.175	300	300	2.0	0.5	Class A Amp	250	150	100, Δ	7.4	2.9	1 meg	4600	—	—	—	6265
6386	Remote cutoff, medium-μ duotriode for use as a cascode RF, IF amplifier, or mixer.	8CJ	9-pin Min.	1½	7/8	Htr.	6.3	0.35	300	—	1.5	—	UHF Voltage Amp	100	—	100, Δ	9.6	—	4.250	4000	—	17	16	6386
6677	Power pentode for mobile communications equipment. Similar to type 6CL6	9BV	9-pin Min.	2½	7/8	Htr.	6.3	0.65	330	330	8.5	2.0	Class A Amp.	250	150	—3	30	7	15 meg	11000	2800	—	2.8	6677
6678	Medium-μ triode and sharp-cutoff pentode for oscillator-mixer service in mobile equipment.	9AE	9-pin Min.	2½½	¾	Htr.	6.3	0.45	330 330	330 —	3.0 3.0	0.55 —	Pentode Class A Triode Class A	250 150	110 —	68, Δ 56, Δ	10 18	3.5 —	.4 meg 5 000	5200 8500	— —	— —	— —	6678
6680/12AU7	Medium-μ duotriode for mobile communications equipment. Similar to type 12AU7.	9A	9-pin Min.	2½½	¾	Htr.	6.3 12.6	0.30 0.15	300	—	3.0†	—	Class A Amp †	100 250	— —	0 -8.5	11.8 10.5	—	6.500 7.700	3100 2200	—	20 17	—	6680/12AU7
6681/12AX7	High-μ duotriode for use in resistance coupled voltage amplifiers, phase inverters, and multivibrators for mobile equipment	9A	9-pin Min.	2½½	¾	Htr.	6.3 12.6	0.30 0.15	330	—	1.1†	—	Class A Amp †	100 250	— —	-1 -2	0.5 1.2	—	80.000 62.500	1250 1600	—	100 100	—	6681/12AX7

Δ Cathode resistor in ohms.

‡ Values for two tubes.

▲ Plate to plate.

§ Both sections.

† Each section.

m Maximum

TABLE IX.

CBS RECTIFIERS

TYPE	DESCRIPTION	CONSTRUCTION							CATHODE	MAX. PLATE RATINGS (Absolute Max. unless noted)				OPER. CONDITIONS (Single Phase F-W 2 Tubes)				TYPE
		Basing	Base	Length, inches	Diameter, inches	Heater - Filament Volts	Amperes	Temperature Range Condensed Mercury °C		Peak Inverse Volts	Peak Amperes	Average Amperes	Peak Inverse Volts	Plate Supply Volts Max. A-C P-to-P	D-C Output Volts to Filter	Max. D-C Output Amperes		
2X2A	H-W vacuum type rectifier with small 4-pin base and small cap. For equipment subject to excessive shock and vibration.	4AB	4-pin	4 1/2	1 1/16	Htr.	2.5	1.75		12500†	.06†	.0075†	—	5500	4500	.002▲	2X2A	
3B25	H-W Xenon rectifier with medium bayonet base and medium cap.	4P	4-pin	6 1/16	2 1/16	Fil.	2.5	5.0	-75 to +90*	4500	2.0	0.5	4500	3000	1400	1.0	3B25	
3B28	H-W Xenon rectifier with small 4-pin bayonet base and medium cap.	4P	4-pin	6 1/2	2 1/16	Fil.	2.5	5.0	-75 to +90*	1000 5000	1.0 2.0	0.25 0.5	10000 5000	7000 3400	3200 1600	0.5 1.0	3B28	
5R4GY	F-W vacuum type rectifier with coated filament and micanol base for application in low power transmitter stages.	5T	5-pin O.	5 1/16	2 1/16	Fil.	5.0	2.0		2800†	0.65†	0.175 †‡	—	1800 1900	1060 810	0.15▲ 0.175‡	5R4GY	
5Y3WGTA	F-W vacuum type rectifier for equipment subject to excessive shock and vibration. Full ratings up to 65,000 feet.	5T	5-pin O.	3 1/2	1 1/16	Fil.	5.0	2.0	—	1400†	1.8†	0.375†	—	800 1000	345 390	.125▲ .125‡	5Y3WGTA	
83	F-W mercury vapor rectifier for use in D-C power supplies.	4C	4-pin	5 1/2	2 1/16	Fil.	5.0	3.0	20 to 60	1705‡ 1705▲	1.1‡ 1.1▲	248‡ 248▲	— —	1180‡ 990▲	— —	248‡ 248▲	83	
FG104	See 5561/FG104																FG104	
575A	H-W mercury vapor rectifier.	4AT	4-pin	11 1/16	3 3/8	Fil.	5.0	10.0	20 to 50	15000	6.0	1.5	—	—	4800	1.5	575A	
673	H-W mercury vapor rectifier with super jumbo, 4-pin bayonet base and medium cap.	2P	4-pin	11 3/8	3 3/16	Fil.	5.0	10.0	25 to 50 25 to 55 30 to 50	15000 10000 15000	6.0 7.0 10.0	1.5 1.75 2.5	15000 10000 —	10600 7000 —	4800 3200 —	3.0 3.5 —	673	
816	H-W mercury vapor rectifier with small 4-pin base and cap.	4P	4-pin	4 1 1/16	1 1/16	Fil.	2.5	2.0	20 to 60	7500	0.5	0.125	7500	5200	2400	0.25	816	
857B	H-W mercury vapor rectifier with special terminal connections and skirted large cap.	857B	Spec.	19 1/2	7 1/2	Fil.	5.0	30	30 to 40 25 to 60	22000 10000	40 40	10 10	22000 10000	15400 7000	7000 3200	20 20	857B	

866A	H-W mercury vapor rectifier with small 4-pin bayonet base and ceramic insulated medium cap.	4P	4-pin	6 $\frac{1}{16}$	2 $\frac{1}{16}$	Fil.	2.5	5.0	25 to 60 25 to 70 25 to 80	10000 5000 2500	1.0 1.0 2.0	0.25 0.25 0.5	10000 5000 2500	7000 3400 1600	3200 1600 800	0.5 0.5 1.0	866A
869B	H-W mercury vapor rectifier with special end mountings and skirted large caps.	869B	4-pin	14 $\frac{1}{16}$	5 $\frac{1}{4}$	Fil.	5.0	19.0	30 to 40 30 to 50 30 to 60	20000 15000 10000	10.0 10.0 10.0	2.5 2.5 2.5	20000 15000 10000	14000 10600 7000	6300 4700 3100	5.0 5.0 5.0	869B
872A	H-W mercury vapor rectifier with jumbo 4-pin base and ceramic insulated medium cap.	4AT	4-pin	8 $\frac{1}{2}$	2 $\frac{1}{16}$	Fil.	5.0	7.5	20 to 60 20 to 70	10000 5000	5.0 5.0	1.25 1.25	10000 5000	7000 3400	3200 1600	2.5 2.5	872A
1616	H-W vacuum type rectifier with coated filament, small 4-pin base and medium cap. For transmitters requiring quick operation.	4P	4-pin	6 $\frac{1}{16}$	2 $\frac{1}{16}$	Fil.	2.5	5.0	—	6000	0.8	0.13	—	—	—	—	1616
5561/FG104	H-W mercury vapor rectifier for welder-control service with maximum averaging time of 15 seconds. Super jumbo 4-pin bayonet base.	5561/FG104	4-pin	11 $\frac{1}{4}$	3 $\frac{1}{16}$	Htr. Welder Control	5.0	10.0	40 to 80 25 to 50	3000 10000	40 16	6.4 4.0	3000 2000 950	Surge current 160A for 0.1 sec max.		12.8	5561/FG104
5690	F-W vacuum rectifier with full ratings up to 40,000 feet and a life expectancy of over 10,000 hours. Each unit has its own heater and cathode.	5690	8-pin O.	4 $\frac{1}{4}$	1 $\frac{1}{2}$	Htr.	12.6 6.3	1.2 2.4	—	1120	.375 ∇	62.5	—	700 ∇ 700 \blacktriangle	305 ∇ 415 \blacktriangle	.0075 ∇ .055 \blacktriangle	5690
5726/6AL5W/6097	F-W rectifier with controlled plate current balance and rugged construction for industrial or military use.	7CM	7-pin	1 $\frac{1}{4}$	$\frac{3}{4}$	Htr.	6.3	0.3	—	360	.06 ∇	.01 ∇	—	117 ∇ Z _L =300 Ω ∇ .009 ∇		5726/6AL5W/6097	
6004	F-W vacuum type rectifier which is a JAN approved version of type 5Y3GT. Has two plate caps.	2AJ	5-pin O.	4 $\frac{1}{16}$	1 $\frac{1}{16}$	Fil.	5.0	2.0	—	1400 \uparrow	1.8 \uparrow	0.375 \uparrow	—	800 1000	345 390	.125 \blacktriangle .125 ∇	6004
6202	F-W vacuum type rectifier intended for use in power supplies having low D-C output current requirements. Ratings up to 60,000 feet.	5BS	7-pin Min.	2 $\frac{1}{4}$	$\frac{1}{4}$	Htr.	6.3	0.6	—	1250 \blacktriangle 850 \blacktriangle	1.45 \uparrow	0.2 \uparrow	—	450 \uparrow 325 \blacktriangle	375 \uparrow 365 \blacktriangle	.050 \uparrow .050 \blacktriangle	6202
6663/6AL5	High permeance duodiode suitable for use in low-current applications. Specifically designed for mobile communications equipment, this tube withstands appreciable on-off cycling.	6BT	7-pin Min.	1 $\frac{1}{4}$	$\frac{3}{4}$	Htr.	6.3	0.3	—	250	054 ∇	.009 ∇	Tube Voltage Drop at I _b = 60 ma/plate = 10 volts.			6663/6AL5	
8008	H-W mercury vapor rectifier.	2P	4-pin	8 $\frac{1}{4}$	2 $\frac{1}{16}$	Fil.	5.0	7.5	20 to 60 20 to 70	10000 5000	5.0 5.0	1.25 1.25	10000 5000	7000 3400	3200 1600	2.5 2.5	8008
9006	Miniature H-W UHF rectifier.	6BH	7-pin Min.	1 $\frac{1}{16}$	$\frac{3}{4}$	Htr.	6.3	0.15	—	750	.015	.005	—	270	—	.005	9006

*Ambient temperature.

\uparrow Design Center Value.

‡Choke input.

∇ Per plate.

★ Altitudes up to 40,000 feet.

\blacktriangle Altitudes from 40,000 to 60,000 feet.

\blacktriangle Capacitor input.

\square Excluding flexible leads.

TABLE X.

CBS UHF TUBES (Receiving and Transmitting)

TYPE	DESCRIPTION	CONSTRUCTION		CATHODE		MAX. RATINGS				USE	CHARACTERISTICS—TYPICAL OPER.										TYPE					
		Basing	Base	Length, inches	Diameter, inches	Heater—Filament Volts	Ampere	Frequency in Mc for Full Input	Plate Volts		Screen Volts	Plate Volts	Screen Volts	APPLICATION ▲	Plate Volts	Screen Volts	Grid 1 Volts	Plate Ma	Screen Ma	Grid Ma, D-C		Transconductance, μ mhos	Plate Resistance, Ohms	Amplification	Driving Watts	Output Watts
2C39B	Forced air cooled, high mu triode with integral radiator. For use as an amplifier, oscillator, and frequency multiplier. Useful up to 2500 Mc and above in cathode drive circuits	2AN	Spec.	2 $\frac{3}{16}$	1 $\frac{1}{8}$	Htr.	6.3	1.0	2500 2500	1000 600	—	100 70	CT CP	900 600	—22 —150	90 100	—	27 50	—	$P_k = 2$ W	—	6	—	17	—	2C39B
2C40	Air cooled, lighthouse triode for use as an RF amplifier up to 1200 Mc and a CW oscillator up to 3370 Mc.	6BY	6-pin O.	2 $\frac{3}{16}$	1 $\frac{3}{16}$	Htr.	6.3	0.75	3370	500	—	6.5	—	CT	250	—5	20	0.3	—	—	36	—	.075	—	2C40	
2C43	Air cooled, lighthouse triode for use as a CW oscillator up to 1500 Mc.	6BY	6-pin O.	2 $\frac{1}{16}$	1 $\frac{3}{16}$	Htr.	6.3	0.9	1500 1500	500 3500	—	12 12	CT; CT, pulsed;	470 3000	—	38 2400	—	—	$i_p = 2.5$ A	$f = 1$ Kc.	Pulse = 1 μ sec	48	—	9 1300 pk	2C43	
6J4	Miniature triode for use as a grounded-grid UHF amplifier up to 500 Mc.	7BQ	7-pin Min.	2 $\frac{1}{16}$	$\frac{1}{4}$	Htr.	6.3	0.4	500	150	—	2.25	—	Grounded Grid Class A Amp.	150	$R_k = 100$ ohms	15	—	—	12000	4500	55	—	—	6J4	
955	Medium-mu triode for use up to 600 Mc.	5BC	Acorn	1 $\frac{3}{8}$	1 $\frac{1}{2}$	Htr.	6.3	0.15	600	180	—	1.6	—	RF Amp. & Osc	180	—	—35	7	—	1.5	—	—	—	0.5 at 60 Mc	955	
5675	Medium-mu triode for use as a Class C RF power amplifier and oscillator up to 3000 Mc. Pencil type tube.	5675	Spec.	2 $\frac{1}{16}$	$\frac{3}{16}$ *	Htr.	6.3	0.135	3000 1700	300 165	—	9 5	—	Class A Amp. Cathode Drive Osc. at 1700 Mc.	135 120	$R_k = 68$ $R_g = 20,000$	74 25	—	4.0	6200	3225	20	—	0.475	5675	
6161	Forced air cooled, radiator type triode for CW and TV use. Coaxial electrode structure for cathode drive circuits of the coaxial cylinder type.	2AN	Spec	3 $\frac{1}{32}$	1 $\frac{1}{4}$	Htr.	6.3	3.4	900 900 900	1600 1600 1600	—	250 250 250	CTF CM Doubler to 900 Mc CBT	1650+ 175+ 1675+ 1600+	150+ 175+ 250 100+	250 —	—	50 21 40	—	—	—	80 100 75	180 140 230	6161		
9001	Sharp cutoff UHF pentode.	7BD	7-pin Min.	1 $\frac{1}{4}$	$\frac{1}{4}$	Htr.	6.3	0.15	—	250	100	0.5	0.1	Class A Amp. Mixer	250 250	100 100	—3 —5	2 $G_c = 550$ μ mhos	.7 —	—	> 1 meg.	—	—	—	9001	
9002	UHF triode for use up to 500 Mc. Electrically similar to type 955.	7BS	7-pin Min.	1 $\frac{1}{4}$	$\frac{1}{4}$	Htr.	6.3	0.15	500	250	—	1.6	—	Class A Amp.	90 250	—	2.5 6.3	—	—	1700 2200	14700 11400	25 25	—	—	9002	
9003	UHF pentode amplifier electrically similar to type 956.	7BD	7-pin Min.	1 $\frac{1}{4}$	$\frac{1}{4}$	Htr.	6.3	0.15	—	250	—	1.7	0.3	Class A Amp. Mixer	250 250	100 100	—3 —10	6.7 $G_c = 600$ μ mhos	.7 —	—	1800	700000	—	—	9003	

▲ Explanation of abbreviations in APPLICATION column:
CTF — Class C Telegraphy and FM Modulated

CP — Class C Plate Modulated Amplifier (100% Modulation)
CT — Class C Telegraphy Power Amplifier and Oscillator




















CM — Frequency Multiplier
CBT — Class B Television

‡ Typical operation for two tubes.
† Referred to grid terminal.






















* Includes grid range.

BASING DIAGRAMS FOR SPECIAL PURPOSE TUBE REFERENCE GUIDE






















DIRECTION OF LIGHT
























BASING DIAGRAMS FOR SPECIAL PURPOSE TUBE REFERENCE GUIDE



















BASING DIAGRAMS FOR SPECIAL PURPOSE TUBE REFERENCE GUIDE



BASING DIAGRAMS FOR SPECIAL PURPOSE TUBE REFERENCE GUIDE



BASING DIAGRAMS FOR SPECIAL PURPOSE TUBE REFERENCE GUIDE





APPENDIX

C O N T E N T S

Glossary	1-5
Vacuum Tube Definitions	1-2
Symbol Definitions	3-4
Interpretation of Electron Tube	
Ratings and Characteristics	5-10
General Ratings and Characteristics	5-8
Television Tube Ratings	8-10
Series-String Heaters	10-11
Rectifier Ratings and Rating Charts	11-14
Screen Grid Ratings and Rating Charts.	14-16
Explanation of Tube Type Numbering System . .	16-17
Quadrature FM Detector for Television.	17-19
Use of Tube Testers	19-20
Installation and Handling of Picture Tubes. . . .	20-21
RETMA Color Codes	21-22

GLOSSARY

VACUUM TUBES

A vacuum tube is a device consisting of an evacuated enclosure containing electrodes between which conduction of electrons through the vacuum or contained gas may take place.

Cathode-Ray Oscillograph Tube The cathode-ray oscillograph tube is a vacuum tube in which the electron beam strikes a fluorescent screen. The beam is deflected by applied electric and/or magnetic fields indicating the instantaneous values of the actuating voltage and/or current.

Gas Tube A vacuum tube in which the pressure of the contained gas or vapor is such as to effect substantially the electrical characteristics of the tube.

Hard Tube A vacuum tube with a near perfect vacuum. Tubes with some gas are called soft tubes.

High Vacuum Tube A vacuum tube which is evacuated to a high degree so that its electrical characteristics are essentially unaffected by gaseous ionization.

Mercury Vapor Tube A gas tube in which mercury vapor is the active contained gas.

Phototube An electron tube that is capable of converting light energy into electrical energy. Radiant energy striking a specially prepared surface inside the tube develops an electric current.

Thermionic Tube A vacuum tube in which one of the electrodes is heated to cause electron or ion emission from that electrode.

CLASSIFICATION BY NUMBER OF ELEMENTS

Diode A two-electrode vacuum tube containing an anode (plate) and a cathode.

Heptode A seven-electrode vacuum tube containing an anode, a cathode, a control electrode, and four additional electrodes ordinarily in the form of grids.

Hexode A six-electrode vacuum tube containing an anode, cathode, a control electrode, and three additional electrodes ordinarily in the form of grids.

Multipurpose Tubes A vacuum tube containing within one envelope two or more groups of electrodes associated with independent electron streams.

Octode An eight-electrode vacuum tube containing an anode, a cathode, a control electrode and five additional electrodes ordinarily in the form of grids.

Pentode A five-electrode vacuum tube containing an anode, a cathode, a control electrode, and two additional electrodes ordinarily in the form of grids called the screen and suppressor in receiving tubes.

Tetrode A four-electrode vacuum tube containing an anode, a cathode; a control electrode, and one additional electrode ordinarily in the nature of a grid.

Triode A three-electrode vacuum tube containing an anode, a cathode, and a control electrode.

ELECTRODE CLASSIFICATION

Anode The anode is usually called the plate in radio receiving tubes, and collector or ultor in cathode-ray tubes. It is the electrode to which the principal electron stream flows.

Grid An electrode that influences or controls the electron stream but is not designed principally to emit or collect electrons. It generally consists of a wire mesh in receiving tubes and concentric cylinders in cathode-ray tubes.

CBS ELECTRON TUBES

CATHODES, FILAMENTS AND HEATERS

Cathode Primary source of electron emission. Two main types—directly and indirectly heated.

Directly Heated or Filament Type Cathode An incandescent filament which is a source of direct emission.

Indirectly Heated or Heater Type Cathode Supplies heat to the surrounding cathode which then emits electrons.

Voltage and Current Tube design permits a slight variation but best results follow when rated values are applied. Low voltage causes reduced emission; excessive voltage shortens tube life.

Peak Heater-Cathode Voltage Highest instantaneous voltage a tube can withstand between heater and cathode.

Warm-Up Time See explanation of warm-up time in SERIES STRING HEATERS Section of APPENDIX.

FUNDAMENTAL VACUUM TUBE PROPERTIES

Amplification factor (μ), the dynamic resistance (r_p), and transconductance (g_m) are expressions of the principal dynamic operating characteristics of a vacuum tube. Quantitative calculations may be carried out using these factors of tube performance. These properties being dependent upon one another are related as follows:

$$\mu = r_p \text{ multiplied by } g_m$$

Amplification Factor The ratio of a small change in plate voltage to a corresponding change in grid voltage under the conditions that the plate current and all other electrode voltages remain constant.

Dynamic Plate Resistance The ratio of a small change in plate voltage to a corresponding small change in plate current produced, with grid voltage held to a constant value. It represents the resistance between the cathode and the plate to alternating current.

Transconductance The ratio or change in plate current with respect to a change in grid voltage when the other voltages are held constant is called transconductance or mutual conductance. The unit of transconductance is the mho (ohm spelled backward) but as this is a large unit to use in vacuum tube applications, the one-millionth part of a mho, or micromho, is generally used.

AMPLIFIER CLASSIFICATIONS

Class A Amplifier One in which the grid bias and alternating voltages are such that plate current in the tube, or in each tube of a push-pull stage, flows at all times. This is accomplished by operating at the center point of the plate current versus grid voltage curve, and using signal voltages which do not drive the grid into either the positive region or into the sharp bend near cutoff voltage.

Class AB Amplifier One in which the grid bias and alternating voltages are such that plate current in a given tube flows for appreciably more than half but less than the entire cycle.

Class B Amplifier One in which the grid bias is approximately equal to the cutoff value so that plate current is approximately zero when no exciting grid voltage is applied. Plate current flows for approximately one-half of each cycle when an alternating grid voltage is applied. It is used for both audio and radio frequency amplifiers, usually in push-pull to minimize distortion.

Class C Amplifier One in which the tube operates at a bias much greater than cutoff so that plate power is drawn for appreciably less than one-half of each cycle. It is not used for audio amplifiers since the distortion is too high but it is the most efficient class of operation for r-f amplifiers where harmonics can be reduced by use of resonant circuits.

GENERAL SYMBOLS

A	ampere (a-c rms or d-c)
mA	milliampere
μ A	microampere
a-c	alternating current
AQL	acceptable quality level
cps	cycles per second
kc	kilocycles per second
mc	megacycles per second
$^{\circ}$ C	degrees centigrade
CRO	cathode-ray oscilloscope
db	decibel
d-c	direct current
Δ	a change in value of the indicated variable
rms	root-mean-square (.707 times the peak value)
V	volt (a-c rms or d-c)
mV	millivolt
μ V	microvolt
W	watt
mW	milliwatt
NF	noise figure
P	total power dissipation
R_L	load resistance
T	temperature
T_A	ambient temperature
T_j	junction temperature
T_{stg}	storage temperature
f	farad
μ f	microfarad

RECEIVING TUBE SYMBOLS

e_c	instantaneous total grid voltage
e_b	instantaneous total plate voltage
i_c	instantaneous total grid current
i_b	instantaneous total plate current
E_c	average or quiescent value of grid voltage
E_b	average or quiescent value of plate voltage
I_c	average or quiescent value of grid current
I_b	average or quiescent value of plate current
e_g	instantaneous value of varying component of grid voltage
i_p	instantaneous value of varying component of plate current
E_g	effective or maximum value of varying component of grid voltage
E_p	effective or maximum value of varying component of plate voltage
I_g	effective or maximum value of varying component of grid current
I_p	effective or maximum value of varying component of plate current
E_f	filament or heater terminal voltage

CBS ELECTRON TUBES

RECEIVING TUBE SYMBOLS (cont.)

r_p	plate resistance
g_{jk}	transconductance from electrode k to electrode j
g_m	grid-plate transconductance (mutual conductance)
μ	amplification factor
C_{gp}	grid-plate capacitance
C_{gk}	grid-cathode capacitance
C_{pk}	plate-cathode capacitance
C_{gh}	grid-heater capacitance
C_{ph}	plate-heater capacitance
C_g	grid capacitance
C_p	plate capacitance
C_k	cathode capacitance
E_{inv}	peak (or crest) inverse voltage
E_{fwd}	peak (or crest) forward voltage
t_k	cathode heating time
P_o	power output
P_i	power input
P_p	anode dissipation

SEMICONDUCTOR SYMBOLS

Diodes

E_b	d-c voltage across the diode
E_{bb}	d-c supply voltage
E_p	a-c voltage across the diode
E_{pp}	a-c rms supply voltage
I_b	d-c current through the diode in the forward direction
LI_b	d-c current through the diode in the reverse direction
I_o	rectified d-c current through the diode
i_L	peak load current
t_r	rise time

Transistors

Transistor Basic Symbols

		i, v, p	I, V, P
SUBSCRIPTS	e b c	Instantaneous Varying Components Value	RMS or Effective Varying Components Value
	E B C	Instantaneous Total Value	Average (DC) Value

I_{CBO}, I_{CEO} The collector current when the collector (1st subscript) is biased in the reverse direction with respect to the reference electrode (2nd subscript) and the other electrode is d-c open-circuited (3rd subscript) to the reference electrode.

I_{EBO}, I_{ECO} The emitter current when the emitter is biased in the reverse (high resistance) direction with respect to the reference electrode and the other electrode(s) is d-c open circuited (to the reference electrode).

CBS ELECTRON TUBES

SEMICONDUCTOR SYMBOLS (cont.)

ICBS, ICES	The collector current when the collector (1st subscript) is biased in the reverse direction with respect to the reference electrode (2nd subscript) and the other electrode is d-c short-circuited (3rd subscript) to the reference electrode.
IEBS, IECS	The emitter current when the emitter is biased in the reverse (high resistance) direction with respect to the reference electrode and the other electrode(s) is d-c short-circuited (to the reference electrode).
IBCS, IBES	The base current when the base is biased in the reverse (high resistance) direction with respect to the reference electrode and the other electrode(s) is d-c short-circuited (to the reference electrode).
C_{oc} , C_{ob} , C_{oe}	The capacitance measured across the output terminals (1st subscript) with the input a-c open-circuited. The reference or common electrode is indicated by the 2nd subscript.
$f_{\alpha e}$, $f_{\alpha b}$, $f_{\alpha c}$	Alpha cutoff—The frequency at which the magnitude of the small-signal short-circuited forward current transfer ratio (α) is 0.707 of the low-frequency value. The reference or common electrode is indicated by the 2nd subscript.
(α)	emitter input current gain.
B	large signal base input current gain
(β)	small signal base input current gain
PG	Power Gain = $\frac{\text{Power Output}}{\text{Available Input Power}}$
r_b	internal base resistance (dynamic)

INTERPRETATION OF ELECTRON TUBE RATINGS AND CHARACTERISTICS

RATING SYSTEMS FOR VACUUM TUBES

Design-Center Rating System Design-center ratings are limiting values expressed with respect to an average tube of a specified type for use in a specific service and should not be exceeded under normal operating conditions.

These values are chosen by the tube manufacturer to provide acceptable tube life and satisfactory performance in the average application for tubes of the specified type and for normal variations of supply voltage and components used for the specified service. The tube manufacturer, therefore, must rate the tube type so that initially and throughout life, with normal supply voltage variations of $\pm 10\%$ and normal equipment variations, the tube of the specified type, on the average, will provide satisfactory performance.

The equipment designer uses the design-center ratings as limiting values at which equipment may be designed with average (bogey) tubes and specified supply voltages.

Absolute Maximum Rating System The absolute-maximum ratings for each type are limiting values beyond which the serviceability of the tube may be impaired from viewpoint of life and satisfactory performance. The equipment designer must establish the circuit design so that initially and

throughout tube and equipment life, no absolute-maximum value is exceeded under the worst probable operating conditions with respect to supply voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions and variation in the tube characteristics.

Design Maximum Ratings Design Maximum Ratings are the limiting values expressed with respect to average (bogey) tubes at which satisfactory tube life can be expected to occur in the types of service for which the tube is rated. Therefore, the equipment designer must establish the circuit design so that initially and throughout equipment life no design maximum value is exceeded with an average tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, and environmental conditions.

Typical Operation For many receiving tubes, the data show typical operating conditions in particular service. Typical operating values are given to show concisely some guiding information for the use of each type. They are not to be considered as ratings because the tube can be used under any suitable conditions within its rating limitations.

Reference Points for Maximum Ratings All electrode voltages under these systems are measured relative to a fixed reference point which is defined as follows:

- a. Cathode Types: The reference point is the cathode terminal.
- b. D-C Filamentary Types: The negative filament terminal.
- c. A-C Filamentary Types: The electrical center of the filament.

Reference Points For All Voltages Except Maximum Ratings These are measured relative to a fixed reference point which is defined as follows:

- a. Cathode Types Not Rated with Cathode Bias: Cathode terminal.
- b. Cathode Types With Cathode Bias: Negative terminal of the cathode-bias resistor.
- c. D-C Filamentary Types: Negative filament terminal.
- d. A-C Filamentary Types: Electrical center of the filament.

DIRECT INTERELECTRODE CAPACITANCES

The capacitance existing between the electrodes in a vacuum tube. When two conductors are separated by a dielectric, direct capacitance is equal to the charge produced divided by the voltages applied. Since the electrodes in an electron tube are conductors and they are separated by a dielectric (the vacuum), capacitance develops between them. Unless otherwise indicated, all capacitances are measured with filament or heater cold, with no direct voltages present, or no external shields. All electrodes are grounded other than those between which capacitance is being measured.

Input Capacitance Measured between the input electrode and all other electrodes except the output electrode. Ground the output electrode and inactive tube sections.

Output Capacitance Measured between the output electrode and all other electrodes except the input electrode. Ground input electrode and inactive sections.

ELECTRODE CONNECTIONS FOR MEASURING DIRECT INTERELECTRODE CAPACITANCES

(From RETMA ET-109A or ASA C60.6 1952)

CAPACITANCE	MEASURE BETWEEN	GROUND
Indirectly Heated Cathode Types		
Heater-Cathode	Heater and cathode	All other electrodes
Diode Types		
Input	Plate + cathode + fil. + shields, etc.	Other sections
Triode, Tetrode, Pentode Types		
Grid-Plate	Grid and plate (Cgp)	All other electrodes
Input	Grid and cathode + fil. + screen + shields, etc.	Plates, diodes, inactive section(s)
Output	Plate and cathode + fil. + screen + shields, etc.	Grids, diode, inactive section(s)
Input (Grounded Grid) (Receiving Tubes Only)	Cathode and grid + fil. + screen + shields, etc.	Plate, diodes, inactive section(s)
Output (Grounded Grid) (Receiving Tubes Only)	Plate and grid + fil. + screen + shields, etc.	Cathode, diode, inactive section(s)
Converter Types		
R-F Input	Signal grid and all other electrodes
Mixer Output	Mixer plate and all other electrodes
Oscillator Input	Oscillator grid and cathode + fil. + shields, etc.	Oscillator plate + other section(s)
Oscillator Output	Oscillator plate and cathode + fil. + shields, etc.	Oscillator grid + other section(s)

CLASS A AMPLIFIER RATINGS

Peak Heater-Cathode Voltage A maximum rating for the highest voltage that a tube can withstand between heater and cathode. The specified voltage may or may not distinguish between changing d-c voltages applied. The sum value, positive or negative, is designated as *Total D-C and Peak*; thus including both components. To guard against the more severe condition, the d-c component value is generally specified only with the heater positive with respect to cathode, for tubes used in ordinary applications often require appropriate heater-cathode voltage ratings.

Plate Dissipation The highest average value of power input to the plate at zero signal condition.

Screen Dissipation The highest average value of screen input. This usually coincides with the condition where the peak input voltage equals the bias voltage. See section entitled "Screen Grid Ratings and Rating Chart" for additional screen rating information.

CBS ELECTRON TUBES

RECTIFIER RATINGS

Peak Inverse Plate Voltage The highest instantaneous plate voltage that the tube can recurrently stand in the reverse direction to that of normal current flow.

Peak Plate Current The highest instantaneous plate current recurrently allowed for normal current flow.

D-C Output Current The highest average plate current that may be handled continuously.

Surge Plate Current The highest value of abnormal peak plate current of short duration under the most adverse conditions. For additional details see section entitled "Rectifier Ratings and Rating Charts."

TELEVISION TUBE RATINGS

Ratings for television scanning service are based on operation in a 525-line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcast Stations; Federal Communications Commission" in which the duty cycle of the voltage pulse does not exceed 15% of one scanning cycle.

Horizontal deflection tube ratings are based on a voltage pulse width of 10 microseconds in horizontal deflection service to comply with the 15% duty cycle described above.

Vertical deflection tube ratings are based on a voltage pulse width of 2500 microseconds in vertical deflection service to comply with the 15% duty cycle described above.

HORIZONTAL DEFLECTION AMPLIFIER RATINGS

D-C Plate Voltage For all practical purposes, d-c plate voltage is expressed as the sum of the d-c power supply voltage and boost voltage. Actually, it is the d-c supply voltage plus the boost voltage minus the IR drop in the transformer and, in the case of direct-drive circuits, also less the drop in the damper diode.

Peak Positive Plate Voltage Based on actual voltage breakdown considerations at the frequency, duty cycle and supply impedances of the horizontal amplifier stages. It is an absolute maximum rating determined by the tube manufacturer.

Peak Negative Pulse Plate Voltage This rating is intended to protect the tube against failure caused by plate emission at the time the plate swings negative to cathode.

Peak Negative Grid 1 Voltage This rating has been established at -300 volts. It is not an absolute maximum value.

Plate Dissipation Maximum plate dissipation rating is determined on the same basis used to establish the plate dissipation rating for Class A Service. When the tube is used as a horizontal deflection amplifier, measurement of plate dissipation is difficult. Comparison methods are considered acceptable. Comparison methods are defined as those in which the temperature of the plate, or a factor which is a function of the temperature of the plate, is first measured operationally. Plate dissipation is then determined by the static power input to the plate necessary to duplicate the temperature, or other factors so measured, keeping other elements and ambient temperature at the operational value.

Grid 2 (Screen) Dissipation Determined on the same basis as for Class A service.

Average Cathode Current This rating is based on the same principle used to establish the maximum average cathode current for Class A service.

Peak Cathode Current This rating is 3.5 times the average cathode current. It is required by the application, and field experience has indicated that it is a safe and practical value.

Grid 1 Circuit Resistance The grid 1 circuit resistance has been established as 0.47 megohms for all horizontal deflection amplifiers. This value is based upon requirements of the application and limitations of the tube with respect to gas and grid emission.

Average Characteristics Average characteristics are chosen so that interchangeability among tubes of different manufacture would be increased. Static characteristics are described whose factors define the pertinent characteristics of the horizontal deflection tube.

Additional characteristics to define the tube's operation without the use of characteristics curves are included. They are the plate and screen currents in the region of the knee of the plate characteristics, and the triode connected amplification factor.

The knee-region characteristic is a zero-bias test point at a position 10 to 20 volts above the plate voltage which corresponds to the knee of the plate-family characteristic curve. Instantaneous values are indicated to protect the tube when the values described exceed the maximum permissible plate and screen dissipation.

VERTICAL DEFLECTION AMPLIFIER RATINGS

D-C Plate Voltage Determined on the same basis used to establish the maximum d-c plate voltage rating for Class A service.

Peak Positive Pulse Plate Voltage Based on actual voltage breakdown, considerations of the typical duty cycle and supply impedances of the vertical amplifier stages. This is an absolute maximum rating.

Peak Negative Pulse Grid 1 Voltage As a practical expedient, a value of 250 volts is assigned with due weight taken into consideration for vertical deflection application.

Plate Dissipation Determined on the same basis as used for establishing plate dissipation ratings for Class A service. Refer to the discussion of maximum plate dissipation under horizontal deflection amplifiers.

Average Cathode Current Based on the same considerations as those used to establish the maximum average cathode current for Class A service.

Peak Cathode Current At 60 cycles and a maximum duty cycle of 15%, the peak cathode current is 3.5 times the average cathode current. Based on application requirements with due regard for the limitations of the cathode at the duty cycle repetition rate encountered in this service.

Grid 1 Circuit Resistance Maximum grid 1 circuit resistance rating is based on the requirements of the application and the limitations of the tube with respect to gas and grid emission and has been established at 2.2 megohms.

HORIZONTAL AND VERTICAL DEFLECTION OSCILLATOR RATINGS

D-C Plate Voltage Based on the same considerations used to establish the maximum d-c plate voltage rating for Class A service.

Peak Negative Pulse Grid 1 Voltage Since grid-cathode leakage could become a limiting factor in this rating before

CBS ELECTRON TUBES

the breakdown capabilities of the tube are reached, it was decided to use the value of 250 volts with due weight being given to the application requirements.

Peak Cathode Current This rating is a multiple of the average cathode current based on application requirements with due consideration given to cathode capabilities, the typical duty cycle, and repetition rate encountered in this service. A multiplying factor of 3.5 at 60 cycles and a maximum duty cycle of 15% is used for vertical oscillators. A multiplying factor of 15.0 at 15,750 cycles and a maximum duty cycle of 15% is used for horizontal oscillators.

Grid 1 Circuit Resistance The value of grid 1 circuit resistance is based upon the requirements of the application and limitations of the tube with respect to gas and grid emission. It has been established at 2.2 megohms.

DAMPER RATINGS

Peak Inverse Plate Voltage Rating Based on actual voltage breakdown at typical duty cycle frequencies and supply impedances encountered in the horizontal deflection circuit. It is an absolute maximum value.

Heater-Cathode Voltage When the heater is operated negative to the cathode, damping diodes can withstand high voltages between heater and cathode. Values given under heater negative to cathode include the d-c component and the total d-c peak values based on actual breakdown considerations.

Heater Positive to Cathode Permissible heater-cathode voltage compares in magnitude to that found in other types.

D-C Plate Current Based on capabilities of the cathode.

Peak Plate Current Based on cathode capabilities for this service.

Plate Dissipation Rating Based on the physical limitations of the tube. It is determined in application by comparison methods described under maximum plate dissipation rating for horizontal deflection amplifiers.

NOTE: All rectifier ratings are not given for damping diodes. The high plate supply impedance required to limit the steady state peak plate current and the plate dissipation to rated values makes such usage impractical.

SERIES-STRING HEATERS

Series-string heater circuits are used in television receivers to eliminate the need for a heater power transformer, thus reducing weight and cost. The use of heater-cathode type tubes having heater warm-up control characteristics in series-string circuits reduces voltage surges across the heaters during the warm-up period. As a result tube life is extended and heater burn-outs are reduced.

Heater voltage surges are a result of the change in heater resistance from a cold to hot condition. If the manufacturing process for tubes is controlled so that all the tubes used in a series-string have resistance values that increase at approximately the same rate, then the voltage across the tubes will remain equalized. If the heaters were uncontrolled, then the fastest warming-up tubes would have higher than normal voltage across them and the slower warming-up tubes would have lower than normal voltage across them.

By imposing close tolerances during manufacture on the


heater currents, the operating voltage of each tube in the series-string will be held close to its rated value. That is, the resistance of the heater will be such that the correct voltage drop results when the specified current is applied.

The difference in voltage between that of the power line and the sum of the heater voltages is dropped by a voltage dropping resistor of suitable resistance and wattage.

To allow flexibility of design and to reduce to a minimum the voltage dropping resistance, several heater currents are available for warm-up controlled series-string circuits. Values of current now used are the 600 ma., 450 ma., and the 300 ma. current types.

Heater Warm-Up Test The warm-up time of the individual tubes is established by the heater warm-up-time test which has been standardized throughout the industry. In the test, the measured time is that required for the heater to reach 80% of its rated heater voltage during warm-up from room temperature with 4 times the rated heater voltage applied in series with a fixed resistor. This resistor is specified to be 3 times the hot resistance of the tube's heater. For a tube to meet the warm-up specification, the time measured should be approximately 11 seconds. The test circuit used with its formulae is shown below.

WARM-UP TIME TEST CIRCUIT

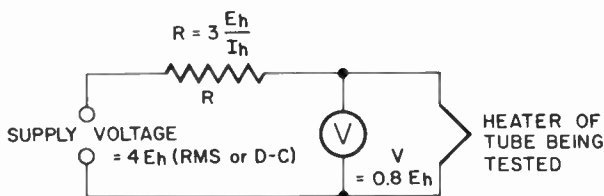

E_h = RATED HEATER VOLTAGE I_h = RATED HEATER CURRENT

NOTE: Heater warm-up time is the time for the voltage (V) to reach 80% of the rated heater voltage (E_h) in the test circuit shown.

RECTIFIERS, RATINGS, AND RATING CHARTS

Ratings of rectifier tubes are based upon fundamental limitations in the operation of tubes. In general, the limitations are inverse plate voltage, transient-peak plate current, steady-state peak plate current, d-c output current, and heater-cathode voltage for types with indirectly-heated cathodes. Maximum ratings for such parameters are included in the tube data. The various maximum ratings are generally not obtainable simultaneously.

Proper tube operation requires that the operating characteristics satisfy the conditions of Rating Charts I, II, and III, with a capacitor-input circuit. With a choke input circuit filter, the operating characteristics must satisfy the conditions of Rating Chart I.

Rating Chart I Use Rating Chart I to determine proper values of a-c plate supply voltage and d-c output current. The operating point must be within the proper area for the type of filter used. Use Rating Chart I first to find the coordinate point for the a-c supply voltage (RMS) per plate and the d-c output current that are to be used. The point

should fall within the area indicated on the chart for the type of filter input being employed.

Should the point fall outside the permissible area of operation, either the a-c supply voltage or d-c output current must be lowered to provide operation within the tube's maximum ratings.

RECTIFIER RATING CHART I

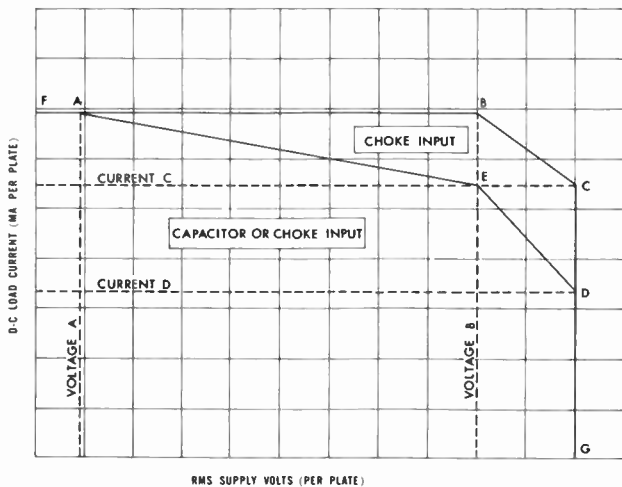


TABLE FOR RATING CHART I

Data Used in Defining the Area of Operation for Popular Rectifier Tubes

TYPE	A	B	C	D	E	F	G
5AS4	61 volts	450 volts	137.5 ma	87 ma	137.5 ma	174 ma	550 volts
5AW4	48 volts	450 volts	125 ma	75 ma	125 ma	150 ma	550 volts
5U4G	60 volts	450 volts	113 ma	71 ma	113 ma	143 ma	550 volts
5U4GA	58 volts	450 volts	125 ma	80 ma	125 ma	158 ma	550 volts
5U4GB	61 volts	450 volts	137.5 ma	87 ma	137.5 ma	174 ma	550 volts
5Y3GT	62 volts	350 volts	62.5 ma	39.5 ma	62.5 ma	80 ma	500 volts
6X4	26 volts	325 volts	35 ma	22 ma	35 ma	42 ma	450 volts

Rating Chart II Rating Chart II determines the operating point within the maximum steady-state peak plate current rating. The maximum permissible rectification efficiency is shown as a function of the d-c output current.

Rectification efficiency, η , is determined by the formula

$$\eta = \frac{\bar{E}}{2 E_s}$$

where E is the d-c output voltage at the filter input and E_s is RMS supply voltage per plate. With the measured value of the d-c current and the calculated value of rectification efficiency, the operating point can be found on Rating Chart II. This point must lie within the shaded area under the curve for operation within the maximum steady-state peak plate current rating. If it does not lie within that area, a circuit adjustment must be made. Usually, the rectification efficiency can be lowered either by reducing the value of the filter input capacitor or by increasing the total supply resistance per plate. It is preferable to adjust the latter. This supply resistance can be built into the transformer winding.

RECTIFIER RATING CHART II

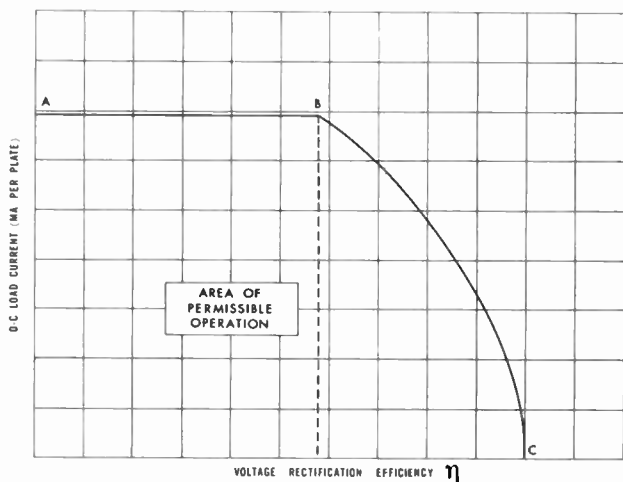


TABLE FOR RATING CHART II

Data Used in Defining the Area of Permissible Operation for Popular Rectifier Tubes

TYPE	A	B	C
5AS4	174 ma	0.6	1.0%
5AW4	150 ma	0.5	1.0%
5U4G	143 ma	0.55	1.0%
5U4GA	158 ma	0.6	1.0%
5U4GB	175 ma	0.58	1.0%
5Y3GT	80 ma	0.55	1.0%
6X4	42 ma	0.52	1.0%

Rating Chart III Rating Chart III is used to determine whether the tube operation is within its maximum transient peak plate-current rating. The transient peak plate-current is also called the hot-switching current.

The hot-switching current is the transient current that flows when the equipment is switched on again before the temperature of the cathode has decreased appreciably. This transient current will be large if the filter capacitor is in a discharged state when the supply voltage is reapplied. The largest possible transient current flows when the supply voltage is at its peak at the instant equipment is switched on.

The hot-switching current is limited only by the resistance of the tube and the associated circuit. Therefore, sufficient resistance must be present to keep the transient current below the rated maximum value. Insufficient resistance may cause a flow of excessive current that can destroy the rectifier. To determine whether the hot-switching current is below the maximum rating, the total effect of series plate-supply resistance per plate must first be calculated. This resistance is given by the formula:

$$R_s = R_{sec} + N^2 R_{pri} + R_a$$

where R_{sec} is the d-c resistance of the transformer secondary per section, R_{pri} is the d-c resistance of the transformer primary, R_a is the d-c resistance of added series-resistance per plate, and N is the voltage step-up ratio of the transformer per section.

After calculating this resistance, the minimum permissible value of series plate-supply resistance per plate should be determined from Rating Chart III for the particular a-c supply voltage to be used. For safe operation the calculated

value of resistance must be equal to or greater than the resistance found in the chart.

If the calculated resistance is less than the minimum resistance value as shown in Rating Chart III, resistance must be added in series with each diode plate so that the calculated resistance will be equal to or greater than the minimum permissible resistance. Series inductance may also be used to limit the transient-peak plate current. If series inductance is used, the resistance R_s in the above formula can be lower than the minimum value indicated by the chart, but the combined effect must limit the transient current to a value below the maximum rating. In the case of combination inductance and resistance, the proper value of series resistance must be experimentally determined.

The series plate-supply resistance limits both the transient-peak plate current and the steady-state peak plate current. The minimum value required to limit each current will not be the same, however, and the larger value of resistance should be chosen.

RECTIFIER RATING CHART III

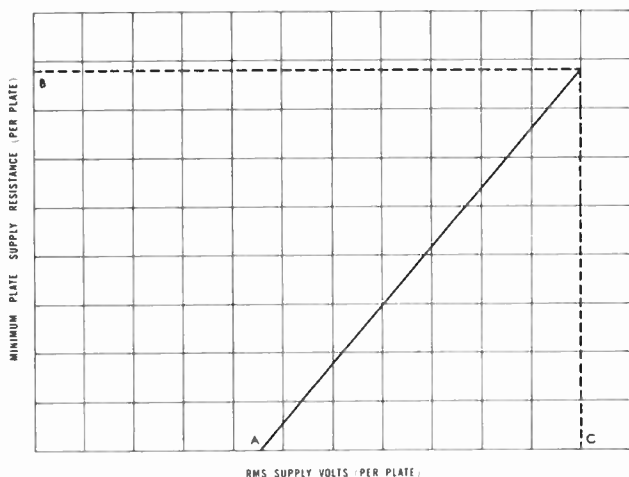


TABLE FOR RATING CHART III

Data Used in Defining the Minimum Effective Plate Supply Resistance for Popular Rectifier Tubes

TYPE	A	B	C
5AS4	232 volts	98 ohms	550 volts
5AW4	200 volts	184 ohms	775 volts
5U4G	210 volts	130 ohms	575 volts
5U4GA	223 volts	108 ohms	550 volts
5U4GB	230 volts	98 ohms	550 volts
5Y3GT	262 volts	160 ohms	550 volts
6X4	98 volts	500 ohms	450 volts

NOTE: If individual Rating Charts for each tube are desired, they are published in the CBS Tube Handbook Engineers' Edition.

SCREEN GRID RATINGS AND RATING CHARTS

Screen grid voltage for a tube may be obtained from either a fixed supply or through a screen dropping resistor. A voltage source is considered fixed if there is no significant voltage change with current variation.

CBS ELECTRON TUBES

Tube data may show a maximum screen voltage or maximum screen supply voltage. When maximum screen voltage is shown, the voltage measured at the screen terminal should not exceed such value under any circuit operating condition. When maximum screen supply voltage is shown, the screen voltage may be permitted to reach the rated supply voltage providing that the screen dissipation is held within the limits shown in Chart A. Screen dissipation is the screen voltage multiplied by the screen current.


The chart is of universal use in circuits for either fixed screen voltage or a series screen-dropping-resistor. It represents the maximum permissible screen dissipation as a percentage of maximum screen-dissipation rating at any screen-voltage operating point. Full rated screen dissipation is permissible from zero up to 50 percent of the maximum-rated screen-supply voltage. From that point on the allowable dissipation decreases.

Fixed screen dissipation should be within the boundary of the chart at the screen voltage to be used.

A screen-grid dropping resistor should limit the current so that the dissipation is within the same boundary of the chart. The minimum value of voltage dropping resistor is given by the factor $\frac{E_{cc2}^2}{4P_{g2}}$ where E_{cc2} is the selected screen supply voltage and P_{g2} is the maximum screen dissipation for the type.

To illustrate, assume that a tube is rated at a maximum

CHART A

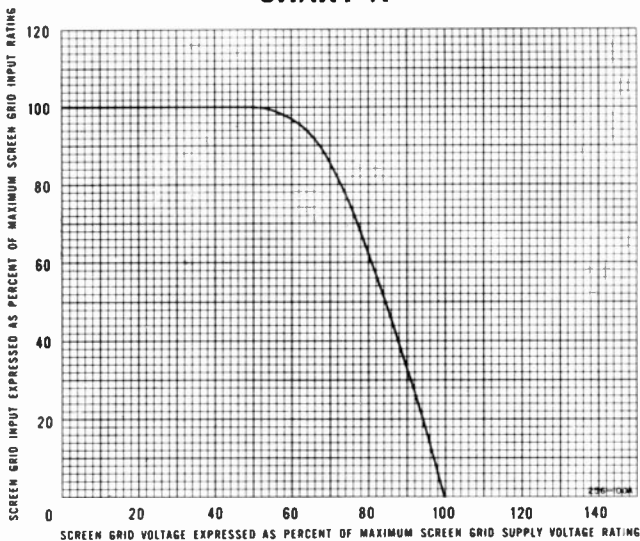

screen-supply voltage of 300 volts and 1.0 watt maximum screen dissipation. If it is desired to operate the tube at 200 volts, then 66-2/3 percent of the maximum screen supply voltage is supplied directly to the screen. From Chart A the allowable dissipation is 88 percent of the maximum dissipation, or 0.88 watts.

If the tube is to operate with a screen dropping resistor, the maximum screen voltage must not exceed 300 volts in the example cited above; and the dropping resistor is selected to hold the dissipation within a safe margin of its rated maximum. The dropping resistor can be determined from the formula:

$$R_{c2} \geq \frac{E_{cc2}^2}{4P_{g2}}$$

where R_{c2} is the screen dropping resistor in ohms, E_{cc2} is the selected screen voltage in volts, and P_{g2} is the maximum screen dissipation rating in watts. For example, if a screen supply voltage at 250 volts was selected for the above cited tube type, $R_{c2} \geq \frac{250^2}{4 \times 1.0} = 15,625$ ohms.

EXPLANATION OF TUBE TYPE NUMBERING SYSTEM

Systems Tubes are identified by a combination of numbers and letters designed to describe basic characteristics such as heater voltage, generic type, and certain physical or constructional features. Many systems have been devised to facilitate identification but they have all failed because of the increasing number, variety, and complexity of present-day tubes. Today, there are three systems generally used for the majority of tubes.

System I: (for radio and television receiving tubes)

- a. A number representing the rated filament or heater voltage. Companion types which are identical except for heater or filament voltage usually have the same designation except for this first number.
- b. A letter or letters, assigned by RETMA, generally in alphabetical order.
- c. A number which specifies (with some exceptions) useful elements for which terminals are provided. Type 6AQ5, for example, a beam pentode, has five useful elements. Shields, including the envelope of a metal tube, connected to its separate terminal (s) count as useful elements. An octal based glass tube having n useful elements, exclusive of those connected to Pin 1, is counted as having $n + 1$ useful elements. Terminals labeled "IC" or "Internal Connection, Do Not Use" do not count as useful elements. Combination of elements connected to one terminal count as one useful element.
- d. A letter (s) which may designate the following characteristics: construction, size, or improved electrical rating. None or only part of these may be present. The letter "G" indicates a glass tube with octal base. The combination "GT" indicates the use of a T-9 glass bulb on an octal base. This designation has been discontinued in recent years. Letter "M" indicates a metal-coated glass envelope and octal base. Letter "X" indicates a "low loss" base, and letter "Y" indicates an "intermediate loss" base. Letters "A, B, C, D," etc., used in sequence indicate improved versions unilaterally interchangeable with the preceding versions. The letter "W" or "WA" indicates a military type tube.

System II. (for cathode ray and picture tubes)

- a. A number indicating the nominal screen diameter or diagonal in inches.
- b. A letter (s) assigned by RETMA generally in alphabetical order.
- c. The letter "P" followed by a number indicating the type (color) of screen material. All Black and White television picture tubes are the "P4" type.
- d. Letters "A, B, C, D," etc., used in sequence indicate improved versions unilaterally interchangeable with the preceding versions.

System III. A blanket-type designation covering all tubes that cannot be classified under Systems I and II. These are non-entertainment types. Numbers assigned in this group start from 5500 and work upward.

QUADRATURE FM DETECTOR FOR TELEVISION

The quadrature-grid sound detector for television receivers accomplishes limiting, detection and audio amplification all in one tube. Effective three-stage sound sections composed of one i-f amplifier, a quadrature-grid detector, and an audio output amplifier are then possible.

There are two types of quadrature-grid detector circuits. The one used with the 6BN6 utilizes the special gate construction of this tube. The other circuit has a "locked-oscillator" and employs tube type 6DT6 or similar types in which the control-grid and suppressor grid are both able to effect sharp cutoff of plate current.

Gated Beam Discriminator An example of the 6BN6 gated-beam-discriminator circuit is shown in figure 1A. The 6BN6 internal structure consists of three grids: a limiter gate, an accelerator, and a quadrature gate as shown in figure 2. The plate current is formed into a concentrated beam which is controlled by the limiter grid (Grid 1) and a quadrature grid (Grid 3).

The range between cutoff and saturation voltage is very small for the limiter grid, thus furnishing limiting action on signal peaks. The limiting removes amplitude modulation and noise pulses from the f-m signal.

Limiter and quadrature grids are gates which swing open on positive signal peaks and close on negative peaks. When both gates are open simultaneously, the current will reach the plate of the tube. The amount of current that reaches the plate depends upon the length of time that both of the gates remain open. The time interval for plate current "on" varies with the modulation of the f-m signal. The signal is applied to the limiter grid and reaches the quadrature grid through the space charge existing within the tube. Because the signal reaches the quadrature grid through capacitive coupling, the voltage lag is 90 degrees; thus, it is called the quadrature grid.

When the signal is frequency modulated, the voltage developed across the quadrature-grid tank circuit has a variable phase about the 90-degree fixed-phase-difference with respect to the input signal. When the phase shift lags the signal voltage, the gates are open for a short interval. When the phase leads the signal voltage, then the gates are open for a longer interval. These intervals are changed into an audio signal by the resultant change in plate current amplitude. The i-f frequency component at 4.5 mc is bypassed from plate to ground and the remaining signal is the audio frequency voltage which has sufficient amplitude to drive the power output amplifier directly.

A buzz control is inserted in the cathode circuit to adjust the tube bias so that the proper level for limiting is set. It should be adjusted for minimum buzz in the audio output.

The Locked-Oscillator Discriminator The locked-oscillator, quadrature-grid detector circuit is quite similar to that used with the 6BN6. A typical circuit is shown in figure 1B. Operation is in two modes for either strong signals or weak signals. The locked-oscillator operation does not come into play unless the input signal is weak. Below a certain input signal level the detector will oscillate at a frequency of 4.5 megacycles in quadrature phase (90°) with the input signal regardless of the input signal amplitude.

Feedback from the quadrature-grid circuit to the control

grid through the interelectrode capacitance of the tube causes this oscillation to occur. Strong signals swamp out the oscillation. Similar to the 6BN6 circuit, the quadrature-grid

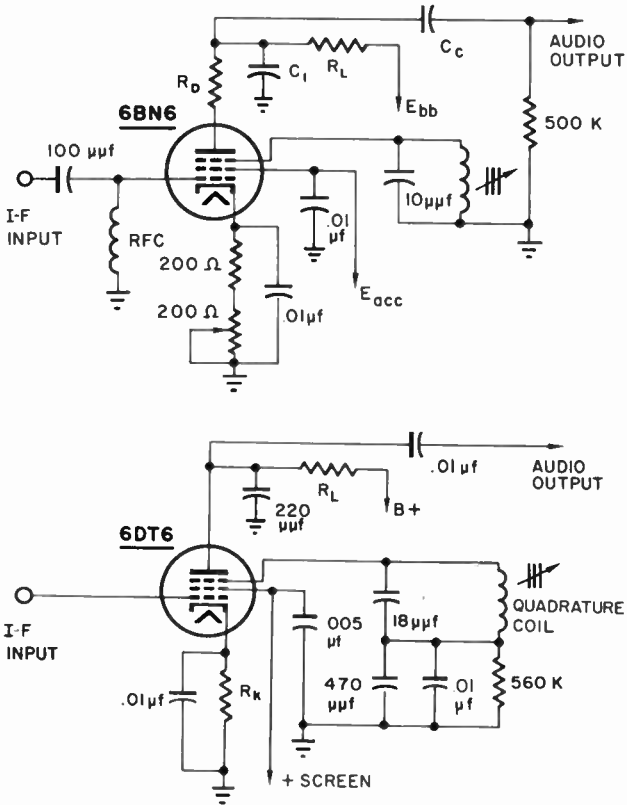


Figure 1: Typical circuits for quadrature grid f-m detectors. (a) 6BN6 gated beam discriminator (b) 6DT6 locked-oscillator discriminator.

C_1 : Integrating capacitor R_D : Plate linearity resistor

C_c : Coupling capacitor R_k : Grid bias resistor

R_L : Plate load resistor

Refer to operating characteristics of each tube type for values.




Figure 2: Internal construction of type 6BN6 showing its gated beam construction.

CBS ELECTRON TUBES

signal voltage varies in phase with f-m modulation. If oscillating, the phase of the oscillations follows the incoming sound i-f signal. The oscillation boosts the weak signal's sensitivity so that undistorted sound is received even with very weak signal strengths.

Limiting action for a-m rejection is accomplished in two ways. Amplitude degeneration occurs in the cathode circuit; and in the grid circuit, high signal levels will cause grid current to flow, thus limiting amplitude variations.

USE OF TUBE TESTERS

Tube testers are used by the serviceman to uncover defective tubes and help with difficult repair problems. However, tube testers are not infallible and have certain drawbacks. Realization of these drawbacks will help the technician to evaluate tubes intelligently.

Emission Tube Testers Early tube testers were of the emission type. This type of tester determined whether or not the filament or cathode was emitting electrons, or whether it was open or shorted. This type of test is of little value in modern tubes which have emission capabilities much greater than would be normally carried in conventional receiver circuits. It does point out whether or not a tube is dead but does not tell whether or not it will work or whether it will continue to work. There are only a few exceptions to this.

Emission testing of certain types of tubes can be destructive. The emission tester draws relatively large cathode currents when performing its function; therefore, tubes with very small cathodes and very close grid-to-cathode spacings should not be tested in it. Some of the tubes that should not be emission tested are uhf converter tubes, vhf tuner tubes, and the 12-volt B+ automobile radio tubes which have a maximum plate voltage rating of only 30 volts.

Dynamic Tube Testers Mutual conductance, also called transconductance, is an important indication of the tube's ability to operate as an effective amplifier or control device. To be a useful measurement, it should be carried out under the same operating conditions that will be applied in actual use. Measurement of transconductance under one set of conditions cannot accurately predict performance under another set of conditions.

Transconductance is a figure of merit in a class A amplifier but is not a reliable indication of the performance of the tube in, for example, oscillator or pulse amplifier applications, or in horizontal and vertical deflection oscillator amplifier circuits in television receivers.

Modern service test equipment incorporates a modified transconductance test called the *Dynamic Mutual Conductance Test*. This is a simplified test that requires compromises in the design of the tube tester, thereby reducing accuracy and effectiveness. The dynamic-mutual-conductance tester is sensitive to a change in plate current in the tube. For a particular tube type, higher transconductance tubes generally require less bias for a certain plate current. Thus a tester with no bias adjustment will tend to read low on good high-gain amplifier tubes. In addition, there is the problem of shifting bias due to overdriving the grid. Better testers provide the means for setting the bias, plate, and screen voltages. These instruments are more accurate than those that do not provide adjustments. The instrument that provides reasonable adjustments can give a good quality measurement of the tube as an amplifier.

Set Testing Tubes Tube testers will not accurately measure certain tubes such as horizontal and vertical deflection tubes, which are the most probable cause of trouble in television receivers. Consequently, the tubes must then be tested by

substitution in the receiver and observed for results. The tube manufacturer tests these tubes in special test sets designed to evaluate the quality of the tube for their intended service. There is no tube checker on the commercial market that will do this.

Short Test The short test was originally intended to indicate the presence of short-circuited electrodes within the tube. A short in this case has no resistance. However, the sensitivity of short testers has been increased to the point where they have become highly sensitive leakage testers. But the amount of leakage that may be tolerated depends upon the circuit in which the tube will be used, which is not always taken into consideration by the tester.

Few circuits in television will be affected by leakage resistance over 5 megohms, but one so-called leakage detector reads a tube as being questionable if it has over 1000 megohms of resistance between the grid and the cathode. The same tester shows questionable on tubes with 20 μ a of heater cathode leakage, which is entirely normal for most vacuum tubes. This type of testing will unnecessarily reject many good tubes, including those that are brand new.

These sensitive leakage testers require a fairly high voltage to achieve their sensitivity. In some of these circuits, up to 75 volts may be applied between the grid and cathode of the tube which is far above the manufacturer's rating for that tube. Even worse, in some tubes, grid-to-cathode voltage should never exceed 25 volts; higher voltages will destroy the tube. The high electrostatic field across the extremely small spacing in modern tubes will draw particles away from the cathode and bridge the gap between the grid and cathode to form a short. The result is that testing a large quantity of new tubes in the tester may show them all to be short circuited.

Low Line Test As the tube tester is not always an effective instrument for measuring the tube's performance, some other method is required to evaluate them. No type of test is entirely infallible, but one simple test that eliminates those tubes which may fail in the near future is the *Low Line Test*. In this test the operating line voltage is reduced to 105 volts and the performance of the set is observed. A tube which fails to function under this condition may be assumed to be a poor risk and should be replaced. In a *Low Line Test*, cathode temperatures should be stabilized by allowing operation for at least five minutes under the reduced voltage conditions.

INSTALLATION AND HANDLING OF PICTURE TUBES

Considerable care should be exercised when picture tubes are installed or handled as breakage (implosion) of picture tubes may result in personal injury.

- A. A suitable eye and face protective device should be used. Other parts of the body should be properly protected.
- B. Picture tubes should be removed from the packing carton face up and supported by the sides of the bulb. Do not handle by the neck as it is the weakest portion of the tube.
- C. When a tube is not in the set or in its packing carton, it should be placed downward with the faceplate resting on a soft pad of material free from abrasives.
- D. Do not scratch or strike the tube, particularly the faceplate, as this may weaken the glass and result in

implosion. Metal tubes are subject to damage if rim around the faceplate is bumped or struck.

- E. Picture tubes should be inserted into their sockets by supporting the tube at the faceplate end. Hold the neck only to guide the base pins into the socket.
- F. Picture tubes should be used in displays only if the vacuum seal has been broken. To break the seal of a picture tube: (1) Place the tube in a shipping carton face down. Have sufficient soft padding underneath for the base to extend above the closed cover. (2) Break off the base lug. (3) Make a small hole in the exhaust tip by using a small file or cutting pliers. (4) After air is allowed to leak into the tube at a slow rate the tip may be broken off entirely.
- G. Picture tubes should be disposed of when they are no longer of use. A tube for disposal should be broken inside a sealed carton. One safe method is to drive a metal rod through the side of the sealed carton into the side of the tube.
- H. Precautions should be taken to prevent the external conductive coating in the two by two square inch contact patch from being damaged and thus impairing the electrical ground connection to the coating. Also, care should be taken to prevent the external insulative coating around the anode button from becoming contaminated. Fingerprints, dust and other foreign materials on the insulative coating may cause electrical breakdown and other disturbances. This condition may be further aggravated by high humidity.

HIGH VOLTAGE PICTURE TUBE PRECAUTIONS

To prevent shock, the normal precautions used when dealing with high-voltage circuits should be carefully observed.

Before any part of the picture tube circuit is handled, the power supply switch should be turned off, the power plug disconnected, and both terminals of any capacitor discharged.

A high voltage charge may be carried by the external conductive coating on the bulb even after it has been removed from the equipment. Make sure this capacitive coating has been discharged by shorting the anode connection to the outside coating.

RETMA COLOR CODES


It is standard to indicate by color the numerical values for components such as composition resistors, mica capacitors, and ceramic capacitors. The numerical value represented by each color is given in the table *Numerical Values, Decimal Multipliers, and Tolerances*.

Capacitors Capacitors of the fixed mica type are marked by the several different methods shown in the figure. The 3-dot RETMA code method is for capacitor types rated at 500 volts and having a tolerance of $\pm 20\%$. The other 6-dot methods indicate the voltage and tolerance by color. Fixed ceramic type capacitors may be marked by narrow bands or dots. If dots are used they have the same meaning as bands in the same order.

Resistors Resistors of the fixed composition type and including small wire-wound units in molded cases are coded as

shown. Axial lead types employ color bands and the body color has no significance. Radial lead resistors employ the body-end-dot colors for numerical identification.


Resistors




Fixed Resistors




Capacitors - JAN Types



Capacitors - RETMA



RETMA - 500 Volts ± 20%



Fixed Ceramic Tubular




TABLE I

Resistor-Capacitor, Color Code				
Color	Significant Figure	Decimal Multiplier	Tolerance (%)	Voltage Rating*
Black	0	1	—	—
Brown	1	10	1*	100
Red	2	100	2*	200
Orange	3	1000	3*	300
Yellow	4	10,000	4*	400
Green	5	100,000	5*	500
Blue	6	1,000,000	6*	600
Violet	7	10,000,000	7*	700
Gray	8	100,000,000	8*	800
White	9	1,000,000,000	9*	900
Gold	—	0.1	5	1000
Silver	—	0.01	10	2000
No color	—	—	20	500

*Applies to capacitors only.

TABLE II

Color Code for Ceramic Capacitors					
Color	Significant Figure	Decimal Multiplier	Capacitance Tolerance		Temp. Coeff. p.p.m./deg C.
			>10 $\mu\text{mf.}$ (in %)	<10 $\mu\text{mf.}$ (in $\mu\text{mf.}$)	
Black	0	1	±20	2.0	0
Brown	1	10	± 1		— 30
Red	2	100	± 2		— 80
Orange	3	1000			—150
Yellow	4				—220
Green	5		± 5	0.5	—330
Blue	6				—470
Violet	7				—750
Gray	8	0.01		0.25	30
White	9	0.1	±10	1.0	500

1AG4 • 1AG5 • 1AK4 • 1AK5 (See chart)




1DN5



Detector and remote-cutoff audio amplifier for portable radios

FILAMENT CHARACTERISTICS

Voltage, d-c 1.4 volts
 Current 50 ma



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Diode plate to grid 1, max. **60W** 0.04 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage 90 volts
 Grid 2 voltage 90 volts
 Grid 1 voltage, negative d-c -50 volts
 Grid 1 voltage, positive d-c 0 volts
 Cathode current 3 ma
 Diode current for continuous operation 0.25 ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage 67.5 volts
 Grid 2 (screen) voltage 67.5 volts
 Grid 1 (control-grid) voltage 0 volts
 Plate resistance (approx.) 0.6 meg
 Transconductance 630 μmhos
 Plate current 2.1 ma
 Grid 2 current 0.55 ma
 Grid 1 voltage (approx.) for $g_m = 10 \mu\text{mhos}$ -11.5 volts
 Average diode current at 10 volts, d-c 1.0 ma

CBS-HYTRON ELECTRON TUBES




1G3GT/ 1B3GT



H-w rectifier for cathode-ray-tube anode supplies

FILAMENT CHARACTERISTICS

Voltage, a-c*..... 1.25 volts
 Current..... 0.2 amp
 *Must not exceed 1.45 volts or be less than 1.05 volts.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Plate to filament, approx.: p to f + i.s..... 1.3 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

Rectifier Service	R-f†	Flyback‡	
Plate voltage, peak inverse			
Total d-c and peak (absolute maximum).....	33	26	kv
D-c.....		21	kv
Output current, d-c.....	1.0	0.5	ma
Plate current, peak steady state.....	30	50	ma

CHARACTERISTICS

Tube voltage drop, conducting 7 ma..... 100 volts

NOTES:

- †Frequency range of supply voltage is 1.5 Kc to 100 Kc.
- ‡Voltage pulse duration must not exceed 10 μs in a 30-frame, 525-line system.




1J3 / 1K3



H-w rectifier for cathode-ray-tube anode supplies

FILAMENT CHARACTERISTICS

Voltage, a-c*..... 1.25 volts
 Current..... 0.2 amp
 *Must not exceed 1.45 volts or be less than 1.05 volts.



1J3/1K3 (cont.)

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Plate to filament, approx.: p to f + i.s. 1.6 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values unless noted)

Rectifier Service†

Plate voltage, peak inverse
 Total d-c and peak (absolute maximum) 26 kv
 D-c 21 kv
 Output current, d-c 0.5 ma
 Plate current, peak steady state 50 ma

CHARACTERISTICS

Tube voltage drop, conducting 7 ma 250 volts

NOTE:

†Voltage pulse duration must not exceed 10 μs in a 30-frame, 525-line system.

Type 1K3 is identical to type 1J3 except for bulb length.




2CY5



Tetrode voltage amplifier for r-f service in VHF tuners of series string heater TV receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c 2.4 volts
 Current 600 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode 100 volts
 Heater positive to cathode 100 volts
 Warm-up time 11 secs. average
 (See Series-String Heaters section of APPENDIX in CBS Tube Manual)



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max. 0.03 $\mu\mu\text{f}$
 Input: g1 to k + h + g2 4.3 $\mu\mu\text{f}$
 Output: p to k + h + g2 2.75 $\mu\mu\text{f}$

Shield‡

‡JETEC shield 316 connected to cathode.

MAXIMUM RATINGS (Design maximum values)

Plate voltage 180 volts
 Grid 2 voltage See Rating Chart in APPENDIX
 Grid 2 supply voltage 180 volts
 Grid 1 voltage, positive d-c 0 volts
 Plate dissipation 2.0 watts
 Grid 2 dissipation 0.5 watt
 Cathode current 20 ma

CBS-HYTRON ELECTRON TUBES

2CY5 (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	125	volts
Grid 2 (screen) voltage.....	80	volts
Grid 1 (control-grid) voltage.....	-1	volts
Plate resistance (approx.).....	0.125	meg
Transconductance.....	8000	μ mhos
Plate current.....	10	ma
Grid 2 current.....	1.4	ma
Grid 1 voltage (approx.) for $I_b = 20 \mu a$	-6	volts

NOTES:

Other heater voltage versions of this tube include types: 3CY5 with a 2.9 volt, 450 ma warm-up controlled heater; 4CY5 with a 4.5 volt, 300 ma warm-up controlled heater; 6CY5 with a 6.3 volt, 200 ma heater.




3AF4A



Triode for uhf local oscillator service, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	3.2	volts
Current.....	450	ma
Peak heater-cathode voltage, max.		
-Heater negative to cathode.....	50	volts
Heater positive to cathode*.....	50	volts
Warm-up time.....	11	secs. average
(See Series-String Heaters section of Handbook APPENDIX)		
*D-c component must not exceed 25 volts max.		



Type 3AF4A is identical to types 2AF4A and 6AF4A except for heater characteristics. Refer to type 2AF4A for additional data.

3B2 (See chart)

CBS-HYTRON ELECTRON TUBES




3CY5



Tetrode voltage amplifier for r-f service in VHF tuners of series string heater TV receivers

HEATER CHARACTERISTICS

- Voltage, a-c or d-c 2.9 volts
- Current 450 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode 100 volts
 - Heater positive to cathode 100 volts
- Warm-up time 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)



Type 3CY5 is identical to types 2CY5, 4CY5, and 6CY5 except for heater characteristics. Refer to type 2CY5 for additional data.



3DK6




Pentode amplifier for i-f service in TV receivers, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c 3.15 volts
- Current 600 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode 300 volts
 - Heater positive to cathode* 200 volts
- Warm-up time 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)

*D-c component 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.	0.020	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3	6.3	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3	1.9	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage	300 volts
Grid 2 voltage	See Rating Chart in APPENDIX
Grid 2 supply voltage	300 volts
Grid 1 voltage, positive d-c	0 volts
Plate dissipation	2.0 watts
Grid 2 dissipation	0.5 watt

3DK6 (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	125 volts
Grid 3 (suppressor).....	connect to cathode at socket
Grid 2 (screen) voltage.....	125 volts
Cathode bias resistor.....	56 ohms
Plate resistance (approx.).....	0.35 meg
Transconductance.....	9800 μ mhos
Plate current.....	12.0 ma
Grid 2 current.....	3.8 ma
Grid 1 voltage (approx.) for $I_b = 20 \mu$ a.....	-6.5 volts

NOTE:

Other heater voltage versions of this tube include types: 4DK6 with a 4.2 volt, 450 ma warm-up controlled heater; 6DK6 with a 6.3 volt, 600 ma heater.



4BZ6




**Pentode i-f amplifier for gain-controlled stages,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c	4.2 volts
Current $\pm 6\%$	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)	

*D-c component must not exceed 100 volts max.



Type 4BZ6 is identical to types 3BZ6 and 6BZ6 except for heater characteristics. Refer to type 3BZ6 for additional data.

4CE5 (See chart)

CBS-HYTRON ELECTRON TUBES




4CS6



Heptode sync separator and clipper, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c	4.2 volts
Current	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 sec. average
(See Series-String Heaters section of Handbook APPENDIX)	
*D-c component must not exceed 100 volts max.	



Type 4CS6 is identical to types 3CS6 and 6CS6 except for heater characteristics. Refer to type 3CS6 for additional data.




4DE6



Controlled cutoff intermediate-frequency amplifier heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c	4.2 volts
Current	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)	
*D-c component 100 volts max.	



Type 4DE6 is identical to types 3DE6 and 6DE6 except for heater characteristics. Refer to type 3DE6 for additional data.




4DK6



**Pentode amplifier for i-f service in TV receivers,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.2 volts
- Current..... 450 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 300 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component 100 volts max.




4DT6



**Dual controlled pentode for f-m detector and limiter,
mixer, or gain-controlled amplifier use,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 4.2 volts
- Current..... 450 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)
- *D-c component must not exceed 100 volts max.



Type 4DT6 is identical to types 3DT6 and 6DT6 for heater characteristics. Refer to type 3DT6 for additional data.

5BS8 (See chart)




5BT8



**Detector combined with video, i-f, or agc amplifier,
heater warm-up controlled for series-strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c	4.7 volts
Current	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)	
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Diode Section

Input: p to k + h	1.3 μmf
Cathode to heater and plate	3.0 μmf

Pentode Section

Grid to plate: g1 to p, max.	0.04 μmf
Input: g1 to k + h + g2 + g3	7.0 μmf
Output: p to k + h + g2 + g3	2.3 μmf
Coupling: pentode grid 1 to diode plate	0.005 μmf
Coupling: pentode plate to diode plate	0.020 μmf

MAXIMUM RATINGS (Design center values)

Plate voltage	300 volts
Grid 2 voltage	See Rating Chart in APPENDIX
Grid 2 supply voltage	300 volts
Grid 1 voltage, positive d-c	0 volts
Plate dissipation	2.0 watts
Grid 2 dissipation	0.5 watts
Grid 1 circuit resistance	
Fixed bias	0.25 meg
Cathode bias	1.0 meg
Diode current for continuous operation, per plate	1.0 ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate supply voltage	200 volts
Grid 2 (screen) supply voltage	150 volts
Cathode-bias resistor	180 ohms
Plate resistance (approx.)	0.3 meg
Transconductance	6200 μmhos
Plate current	9.5 ma
Grid 2 current	2.8 ma
Grid 1 voltage (approx.) for $I_{b1}=10\mu\text{a}$	-8 volts
Diode plate current for diode voltage of 10Vdc	8.0 ma

5BZ7 • 5CL8A (See chart)



5CQ8




Phase-splitter, sync separator, sync clipper and i-f amplifier or triode local oscillator and pentode mixer

HEATER CHARACTERISTICS

Voltage, a-c or d-c	4.7 volts
Current	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average

(See Series-String Heaters section of Handbook APPENDIX)

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	Shield †	No Shield
Grid to plate: g1 to p	1.8	1.8 μmf
Input: g1 to k + h	2.7	2.7 μmf
Output: p to k + h	1.2	0.4 μmf
Tetrode		
Grid to plate: g1 to p, max.	0.015	0.019 μmf
Input: g1 to k + h + g2 + i.s.	5.0	5.0 μmf
Output: p to k + h + g2 + i.s.	3.3	2.5 μmf
Coupling: tetrode plate to triode plate, max.	0.01	0.07 μmf
Heater to cathode ‡	3.0	3.0 μmf

‡JETEC shield 315 connected to cathode.

†JETEC shield 315 connected to ground.

MAXIMUM RATINGS (Design center values)

	Triode Oscillator	Pentode Mixer
Plate voltage	300	300 volts
Grid 2 voltage	See Rating Chart in APPENDIX	
Grid 2 supply voltage		300 volts
Grid 1 voltage, positive d-c	0	0 volts
Plate dissipation	2.7	2.8 watts
Grid 2 dissipation for E_{c2} less than 150V		0.6 watts
Grid 1 dissipation	0.5	watts
Grid 1 circuit resistance		
Fixed bias	0.5	0.25 meg
Cathode bias	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode	Pentode
Plate supply voltage	125	125 volts
Grid 2 (screen) supply voltage		125 volts
Grid 1 (control-grid) voltage		-1 volts
Cathode-bias resistor	56	ohms
Plate resistance (approx.)	5,000	140,000 ohms
Transconductance	8,000	5,800 μmhos
Amplification factor	40	
Plate current	15	12 ma
Grid 2 current		4.2 ma
Grid 1 voltage (approx.) for $I_{b1}=100\mu\text{a}$	-7	-7 volts

CBS-HYTRON ELECTRON TUBES

5CR8 (See chart)




5DH8



TV intermediate-frequency amplifier and vertical oscillator, sync amplifier etc., heater warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c	5.2 volts
Current	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)	
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

Grid to plate: g1 to p	1.6 uuf
Input: g1 to k + h + Pg3 + i.s.	2.4 uuf
Output: p to k + h + Pg3 + i.s.	1.4 uuf

Pentode Section

Grid to plate: g1 to p, max.	0.03 uuf
Input: g1 to k + h + g2	6.5 uuf
Plate to Cathode, Screen, and Heater	4.2 uuf
Output: p to k + h + g2 + g3+ Tk + i.s.	2.2 uuf
Coupling: pentode grid 1 to triode plate	0.008 uuf
Coupling: pentode plate to triode grid	0.005 uuf
Coupling: pentode plate to triode plate	0.04 uuf

MAXIMUM RATINGS (Design maximum values)

Class A Amplifier

	Triode	Pentode
Plate voltage	300	300 volts
Grid 2 voltage	See Rating Chart in APPENDIX	
Grid 2 supply voltage		300 volts
Grid 1 voltage, positive d-c	0	0 volts
Plate dissipation	2.0	2.2 watts
Grid 2 dissipation		0.55 watts
Grid 1 circuit resistance		
Fixed bias	0.5	0.25 meg
Cathode bias	1.0	1.0 meg

MAXIMUM RATINGS (Design maximum values)

Vertical Oscillator Service† - Triode Section

Plate voltage, d-c	300 volts
Grid voltage, peak negative	400 volts
Plate dissipation	1.0 watts
Cathode current, d-c	12 ma
Cathode current, peak	35 ma
Grid 1 circuit resistance	
Fixed bias	2.2 meg
Cathode bias	2.2 meg
Grid-leak bias	2.2 meg

CBS-HYTRON ELECTRON TUBES

5DH8 (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode	Pentode
Plate voltage	250	125 volts
Grid 2 (screen) voltage		125 volts
Cathode-bias resistor	390	56 ohms
Plate resistance (approx.)	12,000	150,000 ohms
Transconductance	4,400	8,600 μ mhos
Amplification factor	53	
Plate current	7.3	13.5 ma
Grid 2 current		3.8 ma
Grid 1 voltage (approx.) for $I_{b1}=10 \mu$ a	-10	volts
Grid 1 voltage (approx.) for $I_{b1}=20 \mu$ a		-6 volts

NOTES:

†Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.

5EA8 • 5EH8 • 5R4GYA • 5V3 (See chart)




6AF3



Damper diode for television horizontal sweep circuits

HEATER CHARACTERISTICS

Voltage	6.3 \pm 10% volts
Current	1.2 amps
Peak heater-cathode voltage, max. †	
Heater negative to cathode*	4500 volts
Heater positive to cathode*	300 volts
♦D-c component must not exceed 1000 volts max.	
★D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Heater to cathode: h to k	2.8 μ uf
Cathode to plate-and-heater: k to p + h	9.0 μ uf
Plate to cathode-and-heater: p to k + h	6.0 μ uf

MAXIMUM RATINGS (Design center values unless noted TV Damper Service*)

Plate voltage, peak inverse	4500 volts
Plate current, d-c	185 ma
Plate current, peak steady state	750 ma
Plate dissipation	6.0 watts
Bulb temperature at hottest point	210 C

AVERAGE CHARACTERISTICS

Tube voltage drop at 340 ma	30 volts
-----------------------------	----------

NOTES:

Voltage pulse duration must not exceed 10 μ s in a 525-line, 30-frame system.

†Design maximum value.

CBS-HYTRON ELECTRON TUBES

6AN8A (See chart)




6BJ8



Horizontal deflection oscillator combined with duodiode phase splitter or comparator, warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	600 ma
Peak heater-cathode voltage, max. (Triode and diodes)	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)	
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode

Grid to Plate: g to p	2.6	μf
Input: g to h + T _k	2.8	μf
Output: p to h + T _k	0.31	μf

Diodes

Diode 1 plate to triode grid, max.	0.070	μf
Diode 2 plate to triode grid, max.	0.11	μf
Diode 1 cathode to all	4.8	μf
Diode 2 cathode to all	4.8	μf
Diode 1 plate to diode 2 plate, max.	0.060	μf
Diode 1 plate to diode 1 cathode: 1D _p to 1D _k + h	1.9	μf
Diode 2 plate to diode 2 cathode: 2D _p to 2D _k + h	1.9	μf
Diode 1 cathode to diode 1 plate: 1D _k + 1D _p + h	4.6	μf
Diode 2 cathode to diode 2 plate: 2D _k + 2D _p + h	4.6	μf
Diode 1 plate to all	3.0	μf
Diode 2 plate to all	3.0	μf

MAXIMUM RATINGS (Design center values)

Triode Section	Class A1 Vertical Amplifier Deflection Amplifier†	
Plate voltage	300	300 volts
Plate voltage, peak pos. (absolute max.)		12,000 volts
Control grid voltage, positive d-c	0	
Control grid voltage, peak negative pulse		250 volts
Plate dissipation‡	3.5	3.5 watts
Cathode current, average	20	20 ma
Cathode current, peak		70 ma
Control grid circuit resistance		
Fixed bias	1.0	meg
Self bias		2.2 meg
Diodes Section		
Peak plate current, each plate		54 ma
D-c current, each plate		9 ma

CBS-HYTRON ELECTRON TUBES

6BJ8 (cont.)

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	90	250	volts
Grid voltage	0	-9	volts
Plate resistance (approx.)	4,700	7,150	ohms
Transconductance	4,700	2,800	μ hos
Amplification factor	22	20	
Plate current	13.5	8.0	ma
Plate current at $E_c=12.5Vdc$		1.7	ma
Grid voltage (approx.) for $I_b=10\mu a$	-7	-18	volts

DIODE CHARACTERISTICS (each diode)


Average current at 10Vdc	50	ma
Voltage drop at $I_b=9mA$ dc	2.6	volts

†Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.

‡Tube protection is needed for no-drive conditions if grid-resistor bias is used.



6BL7GTA



Vertical deflection amplifier and/or oscillator for television receivers

The 6BL7GTA is interchangeable with type 6BL7GT differing only by having an improved section 1 for longer life as an oscillator, and controlled zero-bias plate current in both sections.

Controlled Plate Current Characteristic

$E_b=150Vdc$ $E_c=0V$ $I_b=65mA$

CBS-HYTRON ELECTRON TUBES



6BN8




Multipurpose triode amplifier and duodiode phase detector combined for use in TV receivers, warm-up controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	600 ma
Peak heater-cathode voltage, max. (Triode and diodes)	
Heater negative to cathode	200 volts
Heater positive to cathodes*	200 volts
Warm-up time	11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)	

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode

Grid to Plate: g to p	2.5 $\mu\mu\text{f}$
Input: g to h + T _k	3.6 $\mu\mu\text{f}$
Output: p to h + T _k	0.25 $\mu\mu\text{f}$

Diodes

Diode 1 plate to triode grid, max.	0.060 $\mu\mu\text{f}$
Diode 2 plate to triode grid, max.	0.10 $\mu\mu\text{f}$
Diode 1 cathode to all	5.0 $\mu\mu\text{f}$
Diode 2 cathode to all	5.0 $\mu\mu\text{f}$
Diode 1 plate to diode 2 plate, max.	0.070 $\mu\mu\text{f}$
Diode 1 plate to diode 1 cathode: 1D _p to 1D _k + h	1.9 $\mu\mu\text{f}$
Diode 2 plate to diode 2 cathode: 2D _p to 2D _k + h	1.9 $\mu\mu\text{f}$
Diode 1 cathode to diode 1 plate: 1D _k to 1D _p + h	4.8 $\mu\mu\text{f}$
Diode 2 cathode to diode 2 plate: 2D _k to 2D _p + h	4.8 $\mu\mu\text{f}$
Diode 1 plate to all	3.0 $\mu\mu\text{f}$
Diode 2 plate to all	3.0 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Triode Section

Plate voltage	300	volts
Control grid voltage, positive d-c	0	volts
Plate dissipation	1.5	watts
Control grid circuit resistance	1.0	meg

Diode Section

Peak plate current, each plate	54	ma
D-c current, each plate	9	ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	100	250	volts
Grid voltage	-1	-3	volts
Plate resistance (approx.)	21,000	28,000	ohms
Transconductance	3,500	2,500	μmhos
Amplification factor	75	70	
Plate current	1.5	1.6	ma
Grid voltage (approx.) for I _b =10 μa	-2.5	-5.5	volts

Diode Characteristics (each diode)

Average current at 10Vdc	50	ma
Voltage drop at I _b =9mAdc	2.6	volts




6BQ5



General purpose power amplifier with high power output and high power sensitivity

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3 volts
Current.....	760 ma
Peak heater-cathode voltage, max. Heater negative to cathode.....	100 volts
Heater positive to cathode.....	100 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.....	0.5	$\mu\mu\text{f}$
Input: g1 to all.....	10.8	$\mu\mu\text{f}$
Output: p to all.....	6.5	$\mu\mu\text{f}$
Grid to heater: g1 to h, max.....	0.25	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage.....	300*	volts
Plate supply voltage.....	550	volts
Grid 2 voltage.....	300	volts
Grid 2 supply voltage.....	550	volts
Negative grid 1 voltage.....	100	volts
Plate dissipation.....	12*	watts
Grid 2 dissipation, average.....	2	watts
Grid 2 dissipation, peak.....	4	watts
Cathode current, average.....	65	ma
Grid 1 voltage for grid current starting point with $I_{c1} = 0.3 \mu\text{a}$	-1.3	volts
Grid circuit resistance		
Fixed bias.....	0.3	meg
Self bias.....	1.0	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier (Single Tube)

	Triode Connected†	Pentode
Plate voltage.....	250	250 volts
Grid 2 (screen) voltage.....		250 volts
Grid 1 (control-grid) voltage.....		-7.3 volts
Cathode bias resistor.....	270	135 ohms
Plate resistance (approx.).....		38,000 ohms
Transconductance.....		11,300 μmhos
Grid 1 input voltage, peak a-f.....	9.4	6.0 volts
Plate current, zero signal.....	34	48 ma
Plate current, maximum signal.....	36	49.5 ma
Grid 2 current, zero signal.....		5.5 ma
Grid 2 current, maximum signal.....		10.8 ma
Load resistance impedance.....	3500	5200 ohms
Total harmonic distortion (approx.).....	9	10 %
Power output, maximum signal.....	1.95	5.7 watts
Amplification factor of grid 2 with respect to grid 1 zero signal.....		19

6BQ5 (cont.)

PUSH-PULL AMPLIFIER (Value for two tubes)

	Class AB		Class B		
Plate voltage.....	250	300	250	300	volts
Grid 2 (screen) voltage.....	250	300	250	300	volts
Grid 1 (control-grid) voltage.....			11.6	14.7	volts
Cathode bias resistor.....	130	130			ohms
Grid-to-grid input voltage, peak a-f.....	22.4	28	22.4	28	volts
Plate current, zero signal.....	62	72	20	15	ma
Plate current, maximum signal....	75	92	75	92	ma
Grid 2 current, zero signal.....	7	8	2.2	1.6	ma
Grid 2 current, maximum signal....	15	22	15	22	ma
Load resistance, plate-to-plate...	8000	8000	8000	8000	ohms
Total harmonic distortion (approx.)..	3	4	3	4	%
Power output, maximum signal....	11	17	11	17	watts

NOTES:

*When the heater and positive voltage are obtained from a storage battery by means of a vibrator, the maximum values of the plate and grid 2 voltages are 250 volts and the plate dissipation is 9 watts.

†Grid 2 connected to plate.




6BR8A



Vhf local oscillator and mixer for fm
and television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	250 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average (See Series-String Heaters section of Handbook APPENDIX)
*D-c component must not exceed 100 volts max.	



Type 6BR8A is identical to type 5BR8 except for heater characteristics.

CBS-HYTRON ELECTRON TUBES




6BT8



Detector combined with video, i-f, or agc amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
*D-c component must not exceed 100 volts max.	



Type 6BT8 is identical to type 5BT8 except for heater characteristics. Refer to type 5BT8 for additional data.

6BW4 (See chart)




6BW8



Sound i-f amplifier, sound limiter, or agc keyer combined with a double diode phase detector

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3±10% volts
Current	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)	
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Pentode Section

Grid to plate: g1 to p, max.	0.020	μμf
Input: g1 to k + h + g2 + g3	4.8	μμf
Output: p to k + h + g2 + g3	2.6	μμf

Diode Section

Grid 1 to each diode plate, max.	0.006	μμf
Diode 1 plate to diode cathode and heater	1.3	μμf
Diode 2 plate to diode cathode and heater	1.2	μμf

CBS-HYTRON ELECTRON TUBES

6BW8 (cont.)

MAXIMUM RATINGS (Design maximum values)

Plate voltage	330 volts
Grid 2 voltage	See Rating Chart in APPENDIX
Grid 2 supply voltage	330 volts
Grid 1 voltage, negative d-c	-55 volts
Grid 1 voltage, positive d-c	0 volts
Plate dissipation	3.0 watts
Grid 2 dissipation	0.55 watt
Diode current for continuous operation, each diode	5.0 ma
Grid 1 circuit resistance	
Fixed bias	0.1 meg
Cathode bias	0.5 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	250 volts
Grid 2 (screen) voltage	110 volts
Cathode bias resistor	68 ohms
Plate resistance (approx.)	0.25 meg
Transconductance	5,200 μ mhos
Plate current	10 ma
Grid 2 current	3.5 ma
Grid 1 voltage (approx.) for $I_{b1}=10\mu$ a	-10 volts
Average diode current at $E_b=5V$ dc, each diode	20 ma

6BX8 • 6BY4 • 6BZ8 / X155 (See chart)




6CA5



**A-f power amplifier with high output
from a low B supply voltage**

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	1200 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p	0.5 μ f
Input: g1 to k + h + g2 + b.p.	15.0 μ f
Output: p to k + h + g2 + b.p.	9.0 μ f

CBS-HYTRON ELECTRON TUBES

6CA5 (cont.)

MAXIMUM RATINGS (Design center values)

Plate voltage.....	130	volts
Grid 2 voltage.....	130	volts
Grid voltage, peak positive.....	0	volts
Plate dissipation.....	5.0	watts
Grid 2 dissipation.....	1.4	watts
Grid circuit resistance		
Fixed bias.....	0.5	meg
Self bias.....	0.5	meg
Bulb temperature at hottest point.....	180	°C

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage.....	110	125	volts
Grid 2 (screen) voltage.....	110	125	volts
Grid 1 (control-grid) voltage.....	-4.0	-4.5	volts
Plate resistance (approx.).....	16,000	15,000	ohms
Transconductance.....	8100	9200	μmhos
Grid 1 input voltage, peak a-f.....	4.0	4.5	volts
Plate current, zero signal.....	32	37	ma
Plate current, maximum signal.....	31	36	ma
Grid 2 current, zero signal.....	3.5	4.0	ma
Grid 2 current, maximum signal.....	7.5	11.0	ma
Load resistance impedance.....	3500	4500	ohms
Total harmonic distortion (approx.).....	5	6	%
Power output, maximum signal.....	1.1	1.5	watts

6CH7 (See chart)



6CK4




Vertical deflection amplifier for television receivers

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	6.3	volts
Current.....	1.25	amps
Peak heater-cathode voltage, max.		
Heater negative to cathode.....	200	volts
Heater positive to cathode*.....	200	volts

*D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p.....	6.5	μμf
Input: g1 to k + h.....	8.0	μμf
Output: p to k + h.....	1.8	μμf

CBS-HYTRON ELECTRON TUBES

6CK4 (cont.)

MAXIMUM RATINGS (Design maximum values)

Vertical Deflection Amplifier†

Plate voltage, d-c	550	volts
Plate voltage, peak pos. (absolute max.)	2000	volts
Plate voltage, peak negative	250	volts
Plate dissipation‡	12.0	watts
Cathode current, average	100	ma
Cathode current, peak	350	ma
Control-grid circuit resistance		
Self bias	2.2	meg

AVERAGE CHARACTERISTICS

	Instantaneous Values	Class A	
Plate voltage	100	250	volts
Control-grid voltage	0	-28	volts
Plate resistance (approx.)		1200	ohms
Transconductance		5500	μmhos
Amplification factor		6.6	
Plate current	125	40	ma
Grid 1 voltage (approx.) for $I_b=0.5\text{ma}$		-50	volts
Plate current at $E_c=-38\text{Vdc}$		10	ma

NOTES:

†Voltage pulse duration must not exceed 2500μs in a 525-line, 30-frame system.

‡Tube protection is needed for no-drive conditions if grid-resistor bias is used.

6CL5 (See chart)




6CL8A



Very-high-frequency oscillator and mixer used in TV tuners

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3	volts
Current	450	ma
Peak heater-cathode voltage, max.		
Heater negative to cathode	200	volts
Heater positive to cathode*	200	volts
Warm-up time	11	secs. average
(See Series-String Heaters section of Handbook APPENDIX)		
*D-c component must not exceed 100 volts max.		



Type 6CL8A is similar to types 5CL8 and 6CL8. Refer to type 5CL8 for data other than that given (heater characteristics, C_{kp} , and g_m). The 6CL8A is unilaterally interchangeable with the 6CL8 since it differs only in C_{kp} and transconductance as given below.

CBS-HYTRON ELECTRON TUBES

6CL8A(cont.)

DIRECT INTERELECTRODE CAPACITANCE

	Shield†	No Shield
Tetrode section; grid 1 to plate, max.	0.010	0.020 $\mu\mu\text{f}$

AVERAGE CHARACTERISTICS

Conditions: $E_{b1}=125\text{V}$, $E_{c2}=125\text{V}$, $E_{c1}=-1.0\text{V}$	
Transconductance	6400 μmhos
Conditions: $E_b=100\text{V}$, $E_{c2}=100\text{V}$, $E_{c1}=0\text{V}$	
Transconductance	8000 μmhos

†With JETEC 315 shield connected to cathode.

6CM8 (See chart)




6CQ8



Phase-splitter, sync separator, sync clipper, and i-f amplifier or triode local oscillator and pentode mixer

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)	
*D-c component must not exceed 100 volts max.	



Type 6CQ8 is identical to type 5CQ8 except for heater characteristics. Refer to type 5CQ8 for additional data.

6CR8 • 6CS8 (See chart)




6CU8



Sync clipper, sync separator, etc. and i-f or video amplifier, heater warm-up controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c. 6.3 volts
- Current..... 450 ma
- Peak heater-cathode voltage max.
- Heater negative to cathode..... 200 volts
- Heater positive to cathode..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

- Grid to plate: g1 to p..... 1.6 μf
- Input: g1 to k + h + pentode g3 + i.s..... 1.9 μf
- Output: p to k + h + pentode g3 + i.s..... 1.6 μf

Pentode Section

- Grid to plate: g1 to p, max..... 0.025 μf
- Input: g1 to k + h + g2 + g3 + triode k + i.s..... 7.0 μf
- Output: p to k + h + g2 + g3 + triode k + i.s..... 2.4 μf
- Coupling: pentode grid 1 to triode plate..... 0.02 μf
- Coupling: pentode plate to triode grid..... 0.005 μf
- Coupling: pentode plate to triode plate..... 0.04 μf

MAXIMUM RATINGS (Design center values)

	Triode	Pentode
Plate voltage.....	300	300 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....	300 volts	
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.6	2.0 watts
Grid 2 dissipation.....	0.5 watt	
Grid 1 circuit resistance*		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode	Pentode
Plate supply voltage.....	200	200 volts
Grid 2 (screen) supply voltage.....	150 volts	
Grid 1 (control-grid) voltage.....	-6	volts
Cathode-bias resistor.....	180 ohms	
Plate resistance (approx.).....	.00575	0.30 meg
Transconductance.....	3300	6200 μmhos
Amplification factor.....	19	
Plate current.....	13	9.5 ma
Grid 2 current.....	2.8 ma	
Grid 1 voltage (approx.) for $I_b = 10\mu\text{a}$	-19	-8 volts

NOTE:

*If either unit is operating at maximum rated conditions, Grid 1 circuit resistance for both units should not exceed the values given.




6CX8



Combined sync amplifier, sync separator, or sync clipper, etc., and video or i-f amplifier

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 750 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 200 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

Grid to plate: g1 to p.....	4.4	$\mu\mu\text{f}$
Input: g1 to k + h.....	2.2	$\mu\mu\text{f}$
Output: p to k + h.....	0.38	$\mu\mu\text{f}$

Pentode Section

Grid to plate: g1 to p.....	0.06	$\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3.....	9.0	$\mu\mu\text{f}$
Output: p to k + h + g2 + g3.....	4.4	$\mu\mu\text{f}$
Coupling: pentode grid 1 to triode plate, max.....	.005	$\mu\mu\text{f}$
Coupling: pentode plate to triode grid, max.....	.018	$\mu\mu\text{f}$
Coupling: pentode plate to triode plate, max.....	0.17	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design maximum values)

	Triode	Pentode
Plate voltage.....	330	330 volts
Grid 2 voltage.....	See Rating Chart in APPENDIX	
Grid 2 supply voltage.....		330 volts
Grid 1 voltage, positive d-c.....	0	0 volts
Plate dissipation.....	2.0	5.0 watts
Grid 2 dissipation.....		1.1 watts
Grid 1 circuit resistance		
Fixed bias.....	0.5	0.25 meg
Self bias.....	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

	Triode	Pentode
Plate voltage.....	150	200 40 volts
Grid 2 (screen) voltage.....		125 125 volts
Grid 1 (control-grid) voltage.....		0† volts
Cathode-bias resistor.....	150	68 ohms
Plate resistance (approx.).....	8700	70,000 ohms
Transconductance.....	4600	10,000 μmhos
Amplification factor.....	40	
Plate current.....	9.2	24 40 ma
Grid 2 current.....		5.2 15.5 ma
Grid 1 voltage (approx.) for $I_b = 100 \mu\text{a}$	-50	-8.5 volts

NOTE:

†Applied for short interval of two seconds maximum to prevent damage to the tube.


CBS-HYTRON ELECTRON TUBES

CBS**6CY5**

Tetrode voltage amplifier for r-f service in VHF television tuners

HEATER CHARACTERISTICS

Voltage, a-c or d-c..... 6.3 volts
 Current..... 200 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 100 volts
 Heater positive to cathode..... 100 volts




Type 6CY5 is identical to type 2CY5, 3CY5, and 4CY5 except for heater characteristics. Refer to type 2CY5 for characteristics and ratings.

**6CY7**

Dissimilar duotriode for TV deflection oscillator and amplifier applications

HEATER CHARACTERISTICS

Voltage, a-c or d-c.... 6.3 ±10% volts
 Current..... 750 ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode..... 200 volts
 Heater positive to cathode*..... 200 volts
 *D-c component must not exceed 100 volts max.

**ELECTRICAL DATA****DIRECT INTERELECTRODE CAPACITANCES**

	Section 1	Section 2	
Grid to plate: g1 to p.....	1.8	4.4	μμf
Input: g1 to k + h.....	1.5	5.0	μμf
Output: p to k + h.....	0.30	1.0	μμf

MAXIMUM RATINGS (Design maximum values)

Vertical Deflection, Service*	Section 1† Oscillator	Section 2† Amplifier	
Plate voltage, d-c.....	350	350	volts
Plate voltage, peak positive pulse.....		1800	volts
Control-grid voltage, peak negative d-c.....	400	250	volts
Plate dissipation.....	1.0	5.5 ‡	watts
Cathode current, d-c.....		35	ma
Cathode current, peak.....		120	ma
Control-grid circuit resistance			
Fixed bias.....	2.2		meg
Cathode bias.....	2.2	2.2	meg

CBS-HYTRON ELECTRON TUBES

6CY7 (cont.)

CHARACTERISTICS

	Section 1†		Section 2‡	
	Oscillator		Amplifier	
Plate voltage.....	250	60	150	volts
Control-grid voltage.....	-3.0	0		volts
Cathode-bias resistor.....			620	ohms
Plate resistance (approx.).....	52,000		920	ohms
Transconductance.....	1300		5400	μ mhos
Amplification factor.....	68		5.0	
Plate current.....	1.2	80	30	ma
Control-grid voltage (approx.) for $I_b = 200 \mu$ a.....			-40	volts
Control-grid voltage (approx.) for $I_b = 10 \mu$ a.....	-5.5			volts
Plate current (approx.) for $I_c = -30$ volts.....			3.5	ma

NOTES:


†Section 1 connects to pins 6, 7, and 8. Section 2 connects to pins 1, 3, and 9.

*Voltage pulse duration must not exceed 2500 μ s in a 525-line, 30-frame system.

‡Tube protection is needed for no drive conditions if grid leak bias is used.



6DA4



**TV damper diode for horizontal deflection circuits,
heater warm-up time controlled for series-string circuits**

HEATER CHARACTERISTICS


Voltage..... 6.3 volts
Current..... 1.2 amp

Peak heater-cathode voltage, max.
Heater negative to
cathode†..... 4400 volts
Heater positive to
cathode*..... 300 volts

Warm-up time..... 11 secs. average
(See Series-String Heaters section of
APPENDIX in CBS Tube Manual).

†D-c component must not exceed 900
volts max.

*D-c component must not exceed 100
volts max.



Type 6DA4 is identical to type 12D4 except for heater characteristics.
Refer to 12D4 for other data.

CBS-HYTRON ELECTRON TUBES




6DE7



Television vertical deflection amplifier and oscillator

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	900 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2	
Grid to plate: g1 to p	4.0	8.5	$\mu\mu\text{f}$
Input: g1 to k + h	2.2	5.5	$\mu\mu\text{f}$
Output: p to k + h	0.52	1.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design maximum values unless noted)

Vertical Deflection Oscillator and Amplifier†

	Section 1 ♦ Oscillator	Section 2 Amplifier	
Plate voltage, d-c	330	275	volts
Plate voltage, peak pos. (absolute max.)		1500	volts
Control-grid voltage, peak negative	400	250	volts
Plate dissipation (each plate)‡	1.5	7.0	watts
Cathode current, average	22	50	ma
Cathode current, peak	77	175	ma
Control-grid circuit resistance			
Self bias	2.2	2.2	meg

AVERAGE CHARACTERISTICS

	Section 1	Section 2	
Plate voltage	250	150	volts
Control-grid voltage	-11	-17.5	volts
Plate resistance (approx.)	8750	925	ohms
Transconductance	2000	6500	μmhos
Amplification factor	17.5	6	
Plate current	5.5	35	ma
Grid 1 voltage (approx.) for $I_b=10\mu\text{a}$	-20		volts
Grid 1 voltage (approx.) for $I_b=50\mu\text{a}$		-44	volts
Plate current at $E_c=-24\text{Vdc}$		10	ma
Zero bias plate current $E_b=60\text{V}$, $E_c=0\text{V}$ (Instantaneous values)		80	ma

NOTES:

†Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.

‡Tube protection is needed for no-drive conditions if grid-resistor bias is used.

♦Section 1 connects to pins 6, 7, and 8.

6DG7 (See chart)




6DK6



**Pentode amplifier for i-f service in TV receivers,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 6.3 volts
- Current..... 300 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode..... 300 volts
 - Heater positive to cathode*..... 200 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual)
- *D-c component 100 volts max.




Type 6DK6 is identical to type 3DK6 except for heater characteristics. Refer to 3DK6 for other data.

CBS-HYTRON ELECTRON TUBES




6DN7



Television vertical deflection amplifier and oscillator in one envelope

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3±10% volts
Current	900 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2
Grid to plate: g1 to p	4.0	5.5 μmf
Input: g1 to k + h	2.2	4.6 μmf
Output: p to k + h	0.7	1.0 μmf

MAXIMUM RATINGS (Design maximum values)†

Vertical Deflection Service in Television

	Oscillator Section 1	Amplifier Section 2	
Plate voltage, d-c	350	550	volts
Plate voltage, peak pos. (absolute max.)		2500	volts
Control-grid voltage, peak negative	400	250	volts
Plate dissipation	1.0	10‡	watts
Cathode current, avg.		50	ma
Cathode current, peak		150	ma
Control-grid circuit resistance			
Fixed bias	2.2	2.2	meg
Cathode bias	2.2		meg

AVERAGE CHARACTERISTICS

	Oscillator Section 1	Amplifier Section 2	
Plate voltage	250	150	250 volts
Control-grid voltage	-8	0§	-9.5 volts
Plate resistance (approx.)	9000	2000	ohms
Transconductance	2500	7700	μmhos
Amplification factor	22.5	15.4	
Plate current	8.0	41	ma
Grid 1 voltage (approx.) for I _b =10μa	-18		volts
Grid 1 voltage (approx.) for I _b =50μa		-23	volts

NOTES:

†Voltage pulse duration must not exceed 2500μs in a 525-line, 30-frame system.

‡Tube protection is needed for no-drive conditions if grid-resistor bias is used.

§Applied for short interval (2 secs. maximum) so as not to damage tube.




6DQ5



Horizontal deflection amplifier for color television receivers

Voltage, a-c or d-c 6.3 volts
 Current 2.5 amp
 Peak heater-cathode voltage, max.
 Heater negative to cathode 200 volts
 Heater positive to cathode* 200 volts
 *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p 0.5 μmf
 Input: g1 to k + h + g2 + g3 23 μmf
 Output: p to k + h + g2 + g3 11 μmf

MAXIMUM RATINGS (Design center values unless noted)

Horizontal Deflection Amplifier*

Plate supply voltage, d-c (boost + d-c power supply) 900 volts
 Plate voltage, peak pos. (absolute max.) 7000 volts
 Plate voltage, peak negative pulse 1500 volts
 Grid 2 voltage, d-c 175 volts
 Grid 1 voltage, peak negative 200 volts
 Plate dissipation† 24 watts
 Grid 2 dissipation 3.2 watts
 Cathode current, average 285 ma
 Cathode current, peak 1000 ma
 Grid 1 circuit resistance, self bias† 0.47 meg
 Bulb temperature at hottest point 240 °C

AVERAGE CHARACTERISTICS

	Instantaneous Values		
Plate voltage	70	125	175 volts
Grid 2 (screen) voltage	125	125	175 volts
Grid 1 (control-grid) voltage	0	-25	-25 volts
Plate resistance (approx.)			5,500 ohms
Transconductance			10,500 μmhos
Plate current	550		110 ma
Grid 2 current	42		5 ma
Grid 1 voltage (approx.) for $I_b=1\text{ma}$			-55 volts
Grid 2 to grid 1 amplification factor		3.3	

NOTES:

*Voltage pulse duration must not exceed 10 μs in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.

6DR7 (See chart)




6DS5



Beam power amplifier for radio and TV, high output with low plate voltage

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	0.8 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode	90 volts
Heater positive to cathode	90 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p	0.19 μf
Input: g1 to k + h + g2 + b.p.	9.5 μf
Output: p to k + h + g2 + b.p.	6.3 μf

MAXIMUM RATINGS (Design center values)


Plate voltage	250 volts
Grid 2 voltage	250 volts
Grid voltage, peak positive	0 volts
Plate dissipation	8.0 watts
Grid 2 dissipation	2.0 watts
Grid circuit resistance	
Fixed bias	0.1 meg
Cathode bias	1.0 meg
Bulb temperature at hottest point	250 °C

CHARACTERISTICS AND TYPICAL OPERATION

	Fixed Bias		Cathode Bias		
	200	250	200	250	
Plate supply voltage	200	250	200	250	volts
Grid 2 (screen) voltage	200	200	200	200	volts
Grid 1 (control-grid) voltage	-7.5	-8.5			volts
Cathode bias resistor			180	270	ohms
Plate resistance (approx.)	28,000	28,000	28,000	28,000	ohms
Transconductance	6,000	5,800	6,000	5,800	μmhos
Grid 1 input, peak a-f	7.5	8.5	7.5	9.2	volts
Plate current, zero signal	35	29	34.5	27	ma
Plate current, max. signal	36	32	32.5	25	ma
Grid 2 current, zero signal	3	3	3.5	3	ma
Grid 2 current, max. signal	9	10	9	9	ma
Load resistance impedance	6,000	8,000	6,000	8,000	ohms
Total harmonic distortion	9	10	10	10	%
Power output, max. signal	3	3.8	2.8	3.6	watts




6DT5



Vertical deflection amplifier for television receivers employing a 110° picture tube

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	1.2 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode	200 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p	0.57	μμf
Input: g1 to k + h + g2 + b.p.	12.5	μμf
Output: p to k + h + g2 + b.p.	4.9	μμf

MAXIMUM RATINGS (Design maximum values unless noted)

Vertical Deflection Amplifier*

Plate voltage	315	volts
Plate voltage, peak pos. (absolute max.)	2200	volts
Grid 2 voltage, d-c	285	volts
Grid 1 voltage, peak negative	-250	volts
Plate dissipation†	9.0	watts
Grid 2 dissipation	2.0	watts
Cathode current, average	55	ma
Cathode current, peak	190	ma
Grid 1 circuit resistance		
Fixed bias	0.5	meg
Cathode bias	1.0	meg

AVERAGE CHARACTERISTICS

	Instantaneous Values‡		
Plate voltage	60	75	250 volts
Grid 2 (screen) voltage	150	250	250 volts
Grid 1 (control-grid) voltage	0	0	-16.5 volts
Transconductance			6200 μmhos
Plate current	100	180‡	38 ma
Grid 2 current	15	35‡	2.0 ma
Grid 1 voltage (approx.) for I _b =100μa			-35 volts

NOTES:

*Voltage pulse duration must not exceed 2500μs in a 525-line, 30-frame system.

†Tube protection is needed for no-drive conditions if grid-resistor bias is used.

‡Measured with a re-current waveform to keep plate and grid 2 dissipation within ratings.

§Applied for a maximum of 2 seconds.

6DT8 • 6DW5 • 6DZ8 (See chart)

CBS-HYTRON ELECTRON TUBES




6EA8



Vhf oscillator and mixer, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

Voltage, a-c or d-c 6.3 volts
 Current 450±6% ma
 Peak heater-cathode voltage, max.
 Heater negative to cathode 200 volts
 Heater positive to cathode* 200 volts
 Warm-up time 11 secs. average
 (See Series-String Heaters section of Handbook APPENDIX)
 *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section	Shield [♦]	No Shield	
Grid to plate: g1 to p	1.7	1.7	µuf
Input: g1 to k + h	3.2	3.0	µuf
Output: p to k + h	1.1	0.3	µuf
Heater to cathode, each section [▼]	3.0	3.0	µuf

Pentode Section			
Grid to plate: g1 to p, max.	0.01	0.02	µuf
Input: g1 to k + h + g2 + g3	5.0	5.0	µuf
Output: p to k + h + g2 + g3	3.4	2.6	µuf

♦JETEC shield 315 connected to cathode unless noted otherwise.
 ▼JETEC shield 315 connected to ground.

MAXIMUM RATINGS (Design maximum values)

	Triode	Pentode	
Plate voltage	330	330	volts
Grid 2 voltage	See Rating Chart in APPENDIX		
Grid 2 supply voltage		330	volts
Grid 1 voltage, positive d-c	0	0	volts
Plate dissipation	3.0	3.1	watts
Grid 2 dissipation		0.55	watts

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier	Triode	Pentode	
Plate voltage	150	125	volts
Grid 2 (screen) voltage		125	volts
Grid 1 (control-grid) voltage		-1.0	volts
Cathode-bias resistor	56		ohms
Plate resistance (approx.)	5000	80,000	ohms
Transconductance	8500	6,400	µmhos
Amplification factor	40		
Plate current	18	12	ma
Grid 2 current		4.0	ma
Grid 1 voltage (approx.) for I _b =10µa	-12	-9	volts



6EB8




Class A amplifier • sync separator • sync clipper • video amplifier • pentode mixer

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	750 ma
Peak heater-cathode voltage, max. †	
Heater neg. to cathode	200 volts
Heater pos. to cathode	200 volts
Warm-up time	11 sec. average

(See Series-String Heaters section of the Handbook APPENDIX)

† Design maximum values.
 * D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

Grid to plate: g1 to p	4.4 $\mu\mu\text{f}$
Input: g1 to k + h	2.4 $\mu\mu\text{f}$
Output: p to k + h	0.36 $\mu\mu\text{f}$

Pentode Section

Grid to plate: g1 to p, max.	0.1 $\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3 + I.S.	11 $\mu\mu\text{f}$
Output: p to k + h + g2 + g3 + I.S.	4.2 $\mu\mu\text{f}$
Coupling: pentode grid 1 to triode plate, max.	.005 $\mu\mu\text{f}$
Coupling: pentode plate to triode grid, max.	.018 $\mu\mu\text{f}$
Coupling: pentode plate to triode plate, max.	0.17 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design maximum values)

	Triode	Pentode
Plate voltage	330	330 volts
Grid 2 voltage	See Rating Chart in APPENDIX	
Grid 2 supply voltage		330 volts
Grid 1 voltage, positive d-c	0	0 volts
Plate dissipation	1.0	5.0 watts
Grid 2 dissipation		1.1 watts
Grid 1 circuit resistance		
Fixed bias	0.5	0.25 meg
Cathode bias	1.0	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	250	200	volts
Grid 2 (screen) voltage		125	volts
Grid 1 (control-grid) voltage	-2		volts
Cathode-bias resistor		68	ohms
Plate resistance (approx.)	37,000	75,000	meg
Transconductance	2,700	12,500	μmhos
Amplification factor	100		
Plate current	2	25	ma
Grid 2 current		7.0	ma
Grid 1 voltage (approx.) for $I_b = 100 \mu\text{a}$		-9	volts
Grid 1 voltage (approx.) for $I_b = 20 \mu\text{a}$	-5		volts

PLATE KNEE CHARACTERISTICS (Instantaneous Values)

Plate voltage	45	volts
Grid 2 voltage	125	volts
Grid 1 voltage	0	volts
Plate current	40	ma
Grid 2 current	15	ma

CBS-HYTRON ELECTRON TUBES

6EF6 (See chart)




6EH5



General-purpose power amplifier for radio, TV, and phonographs

HEATER CHARACTERISTICS

Voltage, a-c or d-c	6.3 volts
Current	1.2 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
*D-c component must not exceed 100 volts max.	



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p	0.65	μmf
Input: g1 to k + h + g2 + g3	17	μmf
Output: p to k + h + g2 + g3	9	μmf

MAXIMUM RATINGS (Design center values)

Plate voltage	135	volts
Grid 2 voltage	117	volts
Grid voltage, peak positive	0	volts
Plate dissipation	5	watts
Grid 2 dissipation	1.75	watts
Grid circuit resistance		
Fixed bias	0.1	meg
Cathode bias	0.5	meg
Bulb temperature at hottest point	220	°C

CHARACTERISTICS AND TYPICAL OPERATION

Plate supply voltage	110	volts
Grid 2 (screen) supply voltage	115	volts
Cathode bias resistor	62	ohms
Plate resistance (approx.)	11,000	ohms
Transconductance	14,600	μmhos
Grid 1 input voltage, peak a-f	3	volts
Plate current, zero signal	42	ma
Plate current, maximum signal	42	ma
Grid 2 current, zero signal	11.5	ma
Grid 2 current, maximum signal	14.5	ma
Load resistance impedance	3000	ohms
Total harmonic distortion (approx.)	7	%
Power output, maximum signal	1.4	watts

CBS-HYTRON ELECTRON TUBES




6EH8



Vhf oscillator and mixer, heater warm-up time controlled for series strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c 6.3 volts
- Current 450 ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode 200 volts
 - Heater positive to cathode* 200 volts
- Warm-up time 11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Triode Section

	Shield ♦	No Shield	
Grid to plate: g1 to p	1.8	1.8	µµf
Input: g1 to k + h + Pk + Pg3 + i.s.	2.8	2.8	µµf
Output: p to k + h + Pk + Pg3 + i.s.	2.2	1.7	µµf

Pentode Section

Grid to plate: g1 to p, max.	.012	.020	µµf
Input: g1 to k + h + g2 + g3 + Tk + i.s.	4.8	4.8	µµf
Output: p to k + h + g2 + g3 + Tk + i.s.	3.2	2.4	µµf
Cathode to heater: h to Tk + Pk + Pg1 + Pg3 + i.s.	8.5	8.5	µµf

♦ JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design maximum values)

	Triode	Pentode	
Plate voltage	300	300	volts
Grid 2 voltage	See Rating Chart in APPENDIX		
Grid 2 supply voltage		300	volts
Grid 1 voltage, positive d-c	0	0	volts
Plate dissipation	2.5	2.8	watts
Grid 2 dissipation		0.5	watts
Grid 1 circuit resistance			
Fixed bias	0.5	0.25	meg
Self bias	1.0	1.0	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

	Triode	Pentode	
Plate voltage	125	100	125 volts
Grid 2 (screen) voltage		70	125 volts
Grid 1 (control-grid) voltage	-1.0	0	-1.0 volts
Plate resistance (approx.)			0.17 meg
Transconductance	7500	6500	6000 µmhos
Amplification factor	40		
Plate current	13.5		12.0 ma
Grid 2 current			4.0 ma
Grid 1 voltage (approx.) for I _b =20µa	-9		volts

6EW6 • 6FH6 • 7EY6 (See chart)

CBS-HYTRON ELECTRON TUBES




8AW8A



**Combined sync separator and video amplifier,
heater warm-up controlled for series strings**

HEATER CHARACTERISTICS

Voltage, a-c or d-c	8.4 volts
Current	450 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)	
*D-c component must not exceed 100 volts max.	



Except for heater ratings, the 8AW8A is identical to the 6AW8 and 6AW8A. See type 6AW8 for other data.

8BN8 (See chart)




8BQ5



**Hi-Fi power amplifier with high power
output and high power sensitivity**

HEATER CHARACTERISTICS

Voltage, a-c or d-c	8.0 ± 0.7 volts
Current	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	100 volts
Heater positive to cathode	100 volts



Except for heater ratings, type 8BQ5 is identical to 6BQ5. For further data refer to the 6BQ5.




8CX8



Combined sync amplifier, sync separator, or sync clipper, etc., and video or i-f amplifier

HEATER CHARACTERISTICS

Voltage, a-c or d-c	8.0 volts
Current	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
Warm-up time	11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)	
*D-c component must not exceed 100 volts max.	



Except for heater ratings, 8CX8 is identical to 6CX8. Refer to type 6CX8 for other data.

8CY7 • 9DZ8 • 9EF6 (See chart)




10DE7



Television vertical deflection amplifier and oscillator

HEATER CHARACTERISTICS

Voltage, a-c or d-c	9.7 volts
Current	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	200 volts
Heater positive to cathode*	200 volts
*D-c component must not exceed 100 volts max.	



Type 10DE7 is identical to type 6DE7 except for heater characteristics. Refer to the 6DE7 for other data.

CBS-HYTRON ELECTRON TUBES




11CY7



Dissimilar duotriode for TV deflection oscillator and amplifier applications

HEATER CHARACTERISTICS

- Voltage, a-c or d-c 11.0 volts
- Current 450±6% ma
- Peak heater-cathode voltage, max.
 - Heater negative to cathode 200 volts
 - Heater positive to cathode* 200 volts
- Warm-up time 11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)
- *D-c component must not exceed 100 volts max.



Type 11CY7 is identical to type 6CY7 except for heater characteristics. See type 6CY7 for other data.

12AD7 (See chart)




12AF3



Damper diode for television horizontal sweep circuits, warm-up controlled for series-strings

HEATER CHARACTERISTICS

- Voltage, a-c or d-c 12.6 volts
- Current 600 ma
- Peak heater-cathode voltage, max.*†
 - Heater negative to cathode♦ 4500 volts
 - Heater positive to cathode* 300 volts
- Warm-up time 11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)



*Voltage pulse duration must not exceed 10µs in a 525-line, 30-frame system.

†Design maximum value.

♦D-c component must not exceed 1000 volts max.

*D-c component must not exceed 100 volts max.

Type 12AF3 is identical to type 6AF3 except for heater characteristics. Refer to 6AF3 for additional data.

12AG6 • 12BW4 (See chart)



12CU5




Audio output for television receivers with low plate supply voltage

HEATER CHARACTERISTICS

Voltage, a-c or d-c.....	12.6 volts
Current.....	600 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode.....	200 volts
Heater positive to cathode.....	200 volts
*D-c component must not exceed 100 volts max.	
Warm-up time.....	11 secs. average

(See Series-String Heaters section of APPENDIX in CBS Tube Manual.)



Type 12CU5 is identical to type 6CU5 except for heater characteristics.

12DE8 • 12DF7 • 12DK7 (See chart)

12DQ7 • 12DT5 • 12DT8 (See chart)




12DV8



Combined detector, AVC rectifier and transistor driver for 12-volt system automobile radios

HEATER CHARACTERISTICS

Voltage, a-c or d-c*	12.6 volts
Current	375 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	16 volts
Heater positive to cathode	16 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Tetrode grid to plate: g1 to p	12	μuf
Tetrode input: g1 to Tk + h + g2	9.0	μuf
Tetrode output: p to Tk + h + g2	1.0	μuf
Tetrode g2 to any diode plate, max.	0.015	μuf
Diode 1 input	1.7	μuf
Diode 2 input	1.6	μuf
Diode 1 plate to diode 2 plate, max.	0.10	μuf

MAXIMUM RATINGS (Design maximum values)

Plate voltage	16	volts
Negative control-grid voltage	16	volts
Control-grid circuit resistance	10	meg
Diode current for continuous operation, each diode	5	ma

CHARACTERISTICS AND TYPICAL OPERATION

	Characteristics	Class A	
Plate voltage	12.6	12.6	volts
Cathode resistor	18	18	ohms
Control grid resistor	4.7	4.7	meg
Space-charge-grid voltage	12.6	12.6	volts
Space-charge-grid current	53	54	ma
Amplification factor†	7.6		
Plate resistance (approx.)	900		ohms
Transconductance†	8500		μmhos
Plate current	9.0		ma
Peak AF control-grid voltage		1.2	volts
AF signal source resistance		300,000	ohms
Maximum signal plate current		6.8	ma
Load resistance		1250	ohms
Total harmonic distortion (approx.)		3	%
Power output		5	mw
Average diode current, each diode with 10 volts d-c applied	3.0		ma

NOTE:

- ★This tube is intended for automotive radios operated from a nominal 12-volt battery. Design of the tube will allow heater to operate satisfactorily over the range from 10.0 volts to 15.9 volts. The maximum ratings of this tube provide an adequate safety factor for the wide variations encountered in automotive supply voltages.
- †Control grid to plate.

♦Grid 1 space-charge grid. Grid 2 control grid.

CBS-HYTRON ELECTRON TUBES

12DW5 • 12DY8 (See chart)




12DZ6



I-f amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS

Voltage, a-c or d-c*	12.6 volts
Current	190 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	16 volts
Heater positive to cathode	16 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Unshielded
Grid to plate: g1 to p, max.	0.15 μmf
Input: g1 to k + h + g2 + g3	9.5 μmf
Output: p to k + h + g2 + g3	4.0 μmf

MAXIMUM RATINGS (Design maximum values)

Plate voltage	16 volts
Grid 2 voltage	16 volts
Grid 1 voltage, positive d-c	0 volts
Grid 1 circuit resistance	12 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	12.6 volts
Grid 3 (suppressor)	connect to cathode at socket
Grid 2 (screen) voltage	12.6 volts
Grid 1 Resistor (Bypassed)	10.0 meg
Plate resistance (approx.)	30,000 ohms
Transconductance	3,600 μmhos
Plate current	5.3 ma
Grid 2 current	2.6 ma
Grid 1 voltage (approx.) for $g_m=10\mu\text{mhos}$	-19 volts

NOTE:

*This tube is intended for automotive radios operated from a nominal 12-volt battery. Design of the tube will allow heater to operate satisfactorily over the range from 10.0 volts to 15.9 volts. The maximum ratings of this tube provide an adequate safety factor for the wide variations encountered in automotive supply voltages.

12DZ8 (See chart)




12EA6



I-f amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS

Voltage, a-c or d-c*	12.6 volts
Current	175 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	16 volts
Heater positive to cathode	16 volts



7BK

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Unshielded	
Grid to plate: g1 to p, max.	0.04	μf
Input: g1 to k + h + g2 + g3	11	μf
Output: p to k + h + g2 + g3	4.0	μf

MAXIMUM RATINGS (Design maximum values)

Plate voltage	16	volts
Grid 2 voltage	16	volts
Grid 1 voltage, positive d-c	0	volts
Grid 1 circuit resistance	12	meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	12.6	volts
Grid 3 (suppressor)	connect to cathode at socket	
Grid 2 (screen) voltage	12.6	volts
Grid 1 resistor (bypassed)	10	meg
Plate resistance (approx.)	32,000	ohms
Transconductance	3,800	μmhos
Plate current	3.2	ma
Grid 2 current	1.4	ma
Grid 1 voltage (approx.) for $I_b=10\mu\text{a}$	-3.4	volts

NOTE:

★This tube is intended for automotive radios operated from a nominal 12-volt battery. Design of the tube will allow the heater to operate satisfactorily over the range from 10.0 volts to 15.9 volts. The maximum ratings of this tube provide an adequate safety factor for the wide variations encountered in automotive supply voltages.

12EC8-12EF6 (See chart)

CBS-HYTRON ELECTRON TUBES




12EG6



Dual control r-f amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS

Voltage, a-c or d-c*	12.6 volts
Current	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	30 volts
Heater positive to cathode	30 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—With Shield†

Grid 3 to plate: g3 to p, max.	0.25	μμf
Grid 3 input: g3 to all others	6.5	μμf
Output: p to all others	12	μμf
Grid 1 input: g1 to all except p	5.7	μμf
Grid 1 to cathode: g1 to k + g5	3.2	μμf
Grid 1 to plate: g1 to p, max.	0.04	μμf
Grid 1 to Grid 3: g1 to g3, max.	0.15	μμf

† External shield JTEC 316 connected to pin 2.

MAXIMUM RATINGS (Design center values)

Plate voltage	30	volts
Grid 2 and 4 voltage	30	volts
Grid 2 and 4 supply voltage	30	volts
Grid 3 voltage, negative d-c	30	volts
Grid 3 voltage, positive d-c	0	volts
Grid 3 circuit resistance	10	meg
Cathode current, total	20	ma

CHARACTERISTICS AND TYPICAL OPERATION

Heptode Connected

Plate voltage	12.6	volts
Grid 3 (signal grid) voltage	-0.8†	volts
Grid 2 and 4 (oscillator anode) voltage	12.6	volts
Grid 1 (oscillator grid) voltage	-0.8‡	volts
Plate resistance (approx.)	0.15	meg
Transconductance, grid 3 to plate	800	μmhos
Plate current	0.4	ma
Grid 2 and 4 (oscillator anode) current	2.4	ma
Grid 1 voltage and grid 3 voltage‡ (approx.) for $g_m=10\mu\text{mhos}$	-3.0	volts

NOTES:

- † Provided by grid 1 voltage through a suitable grid 3 resistor.
- ‡ Average bias developed across a 2.2 megohm resistor.
- * This tube is intended for automotive radios operated from a nominal 12-volt battery. Design of the tube will allow the heater to operate satisfactorily over the range from 10.0 volts to 15.9 volts. The maximum ratings of this tube provide an adequate safety factor for the wide variations encountered in automotive supply voltages.




12EH5



**General-purpose power amplifier for radio,
TV, and phonographs**

HEATER CHARACTERISTICS

Voltage, a-c or d-c	12.6 volts
Current	0.6 amp
Peak heater-cathode voltage, max.	
Heater negative with respect to cathode	300 volts
Heater positive with respect to cathode*	200 volts
Warm-up time	11 sec. average
(See Series-String Heaters section of the Handbook APPENDIX)	
*D-c component must not exceed 100 volts max.	



Type 12EH5 is identical to types 6EH5, 25EH5, and 50EH5 except for heater characteristics. See type 6EH5 for other data.




12EK6



Sharp cutoff pentode voltage amplifier for VHF rf-if service

HEATER CHARACTERISTICS

Voltage, a-c or d-c*	12.6 volts
Current	190 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	16 volts
Heater positive to cathode	16 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

Grid to plate: g1 to p, max.	0.032 $\mu\mu\text{f}$
Input: g1 to k + h + g2 + g3	10 $\mu\mu\text{f}$
Output: p to k + h + g2 + g3	5.5 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design maximum values)

Plate voltage	16 volts
Grid 2 voltage	16 volts
Grid 1 voltage, positive d-c	0 volts
Grid 1 circuit resistance	10 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	12.6 volts
Grid 3 (suppressor)	connect to cathode at socket
Grid 1 voltage†	
Grid 2 (screen) voltage	12.6 volts
Grid 1 resistor	2.2 meg
Plate resistance (approx.)	40,000 meg
Transconductance	4,200 μmhos
Plate current	4.4 ma
Grid 2 current	2 ma
Grid 1 voltage (approx.) for $I_{b1}=10\mu\text{a}$	-4 volts

NOTES:

- †Average contact potential developed across specified resistance.
- *This tube is intended for automotive radios operated from a nominal 12-volt battery. Design of the tube will allow the heater to operate satisfactorily over the range from 10.0 volts to 15.9 volts. The maximum ratings of this tube provide an adequate safety factor for the wide variations encountered in automotive supply voltages.




12EL6



Combined detector—a-f voltage amplifier for 12-volt A and B supply automobile radios

HEATER CHARACTERISTICS

Voltage, a-c or d-c*	12.6 volts
Current	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	30 volts
Heater positive to cathode	30 volts



7FB

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES—Unshielded

Grid to plate: g1 to p	1.8	$\mu\mu\text{f}$
Input: g1 to h + k	2.2	$\mu\mu\text{f}$
Output: p to h + k	1.0	$\mu\mu\text{f}$
Diode 1 to diode 2	1.0	$\mu\mu\text{f}$

MAXIMUM RATINGS (Design center values)

Plate voltage	30	volts
Cathode current	20	ma
Control grid circuit resistance	10	meg
Diode current, average	1.0	ma

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	12.6	volts
Control grid voltage	0	volts
Plate current	750	μa
Transconductance	1200	μmhos
Amplification factor	55	
Plate resistance, (approx.)	45,000	ohms
Average diode current with 10 volts d-c applied (each diode)†	2.0	ma

Resistance Coupled Amplifier

Plate supply voltage	12.6	volts
Control grid voltage†	0	volts
Plate load resistor	1.0	meg
Control grid resistor	1.0	meg
Input capacitor	0.02	$\mu\mu\text{f}$
Output capacitor	0.01	$\mu\mu\text{f}$
Grid resistor of following stage	2.0	meg
Voltage gain at 400 cps (measured at an output voltage of 1 volt, rms)	16	volts

NOTES:

*Type 12EL6 is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.

†Test condition only.

‡Contact potential developed across specified grid resistor.




12EM6



**Combined detector—a-f voltage amplifier for 12-volt
A and B supply automobile radios**

HEATER CHARACTERISTICS

Voltage, a-c or d-c*	12.6 volts
Current	500 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	30 volts
Heater positive to cathode	30 volts



ELECTRICAL DATA

MAXIMUM RATINGS (Design center values)

Plate voltage	30 volts
Grid 2 voltage	30 volts
Plate dissipation	0.5 watts
Grid 1 circuit resistance	15 meg
Detector plate current	10 ma

CHARACTERISTICS AND TYPICAL OPERATION

Plate voltage	12.6 volts
Grid 2 (screen) voltage	12.6 volts
Grid 1 resistor (bypassed)	2.2 meg
Plate resistance	4000 ohms
Transconductance	5000 μ mhos
Plate current	6.0 ma
Grid 2 current	1.0 ma
Diode current with 10 volts applied	1.0 ma

Class A Amplifier

Plate voltage	12.6 volts
Grid 2 voltage	12.6 volts
Grid 1 voltage \dagger	0 volts
A-f signal source resistance	200,000 ohms
A-f grid voltage, rms	1.0 volts
Load resistance	3500 ohms
Plate current	2.5 ma
Power output	10 mw
Total harmonic distortion	10 %


NOTES:

*Type 12EM6 is intended for automotive radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10.0 volts to 15.9 volts and that the maximum ratings provide a safety factor for the wide voltage variation encountered in this type of supply.

\dagger Obtained by grid 1 rectification with a 15 megohm resistor. The zero signal plate current is approximately 6.0 ma.




12EN6



**Vertical deflection amplifier for television receivers,
heater warm-up time controlled for series strings**

HEATER CHARACTERISTICS

- Voltage, a-c or d-c 12.6 volts
- Current $0.6 \pm 6\%$ amp
- Peak heater-cathode voltage, max.
Heater negative to cathode 200 volts
- Heater positive to cathode* 200 volts
- Warm-up time 11 secs. average
(See Series-String Heaters section of Handbook APPENDIX)
- *D-c component must not exceed 100 volts max.



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

- Grid to plate: g1 to p 0.65 $\mu\mu\text{f}$
- Input: g1 to k + h + g2 + b.p. 14 $\mu\mu\text{f}$
- Output: p to k + h + g2 + b.p. 8.0 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design maximum values)

Vertical Deflection Amplifier*

	Triode \blacklozenge Connection	Pentode Connection	
Plate supply voltage, d-c	300	300	volts
Plate voltage, peak pos. (absolute max.)	1200	1200	volts
Grid 2 voltage, d-c		150	volts
Grid 1 voltage, peak negative	250	250	volts
Plate dissipation†	7.5	7.0	watts
Grid 2 dissipation		1.25	watts
Cathode current, average	50	50	ma
Cathode current, peak	175	175	ma
Grid 1 circuit resistance	2.2	2.2	meg

AVERAGE CHARACTERISTICS

	Instantaneous Values \blacktriangledown		
Plate voltage	50	200	volts
Grid 2 (screen) voltage	110	110	volts
Grid 1 (control-grid) voltage	0	-9.5	volts
Plate resistance (approx.)		28,000	ohms
Transconductance		8,000	μmhos
Grid 1 cutoff voltage (approx.)		-35	volts

NOTES:

- *Voltage pulse duration must not exceed 2500 μs in a 525-line, 30-frame system.
- †Tube protection is needed for no-drive conditions if grid-resistor bias is used.
- \blacklozenge Grid 2 tied to plate.
- \blacktriangledown Applied for 2 seconds or less so as not to damage the tube.

12EZ6 • 12FA6 • 12FM6 • 12G8 (See chart)




12U7



General purpose duotriode amplifier for 12-volt A and B supply radios

HEATER CHARACTERISTICS

Voltage*	12.6 volts
Current	150 ma
Peak heater-cathode voltage, max.	
Heater negative to cathode	30 volts
Heater positive to cathode	30 volts



ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES

	Section 1		Section 2		
	No Shield	Shield†	No Shield	Shield†	
Grid to plate: g1 to p...	1.5	1.5	1.5	1.5	μμf
Input g1 to h + k...	1.6	1.8	1.6	1.8	μμf
Output: p to h + k...	0.40	2.0	0.32	2.0	μμf

†JETEC shield 315 connected to cathode.

MAXIMUM RATINGS (Design center value)

Plate voltage	30 volts
Cathode current	15 ma
Control grid circuit resistance	
Fixed bias	0.25 meg
Cathode bias	1.0 meg

CHARACTERISTICS AND TYPICAL OPERATION

Class A Amplifier

Plate voltage	12.6 volts
Grid voltage	0 volts
Plate resistance (approx.)	12,500 ohms
Transconductance	1600 μmhos
Amplification factor	20
Plate current	1.0 ma
Grid 1 voltage (approx.) for I _b = 10 μa	-1.5 volts


NOTE:

*Type 12U7 is intended for use in automobile radios operated from a nominal 12-volt battery. Design of the tube is such that the heater will operate satisfactorily over the range from 10 to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variations encountered in this type of supply.

13DR7 (See chart)




17AX4GT



Damper diode for television horizontal sweep circuit

HEATER CHARACTERISTICS

- Voltage, a-c or d-c..... 16.8 volts
- Current..... 450 ma
- Peak heater-cathode voltage, max.*
 - Heater negative to cathode†..... 4400 volts
 - Heater positive to cathode*..... 300 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- †D-c component must not exceed 900 volts max.
- *D-c component must not exceed 100 volts max.
- †Absolute maximum value



Type 17AX4GT is identical to types 6AX4GT, 12AX4GT, and 25AX4GT except for heater characteristics. See type 6AX4GT for ratings and operating characteristics.


NOTE:

*Voltage pulse duration must not exceed 10 μ s in a 525-line, 30 frame system.

17BQ6GT • 17C5 (See chart)




17D4



TV damper diode for horizontal deflection circuits, heater warm-up time controlled for series-string circuits

HEATER CHARACTERISTICS

- Voltage^o..... 16.8 volts
- Current..... 0.45 amp
- Peak heater-cathode voltage, max.
 - Heater negative to cathode†..... 4400 volts
 - Heater positive to cathode*..... 300 volts
- Warm-up time..... 11 secs. average
(See Series-String Heaters section of APPENDIX in CBS Tube Manual).
- †D-c component must not exceed 900 volts max.
- *D-c component must not exceed 100 volts max.



Type 17D4 is identical to type 12D4 except for heater characteristics. Refer to 12D4 for other data.

17R5 • 18DZ8 (See chart)




25EH5



**General-purpose power amplifier for radio,
TV, and phonographs**

HEATER CHARACTERISTICS

Voltage, a-c or d-c	25 volts
Current	0.3 amp
Peak heater-cathode voltage, max.	
Heater negative with respect to cathode	200 volts
Heater positive with respect to cathode*	200 volts
*D-c component must not exceed 100 volts max.	



Type 25EH5 is identical to types 6EH5, 12EH5, and 50EH5 except for heater characteristics. See type 6EH5 for other data.




50EH5



**General-purpose power amplifier for radio,
TV, and phonographs**

HEATER CHARACTERISTICS

Voltage, a-c or d-c	50 volts
Current	0.15 amp
Peak heater-cathode voltage, max.	
Heater negative with respect to cathode	200 volts
Heater positive with respect to cathode*	200 volts
*D-c component must not exceed 100 volts max.	



Type 50EH5 is identical to types 6EH5, 12EH5, and 25EH5 except for heater characteristics. See type 6EH5 for other data.



50DC4




Half-wave power rectifier for a-c/d-c equipment

HEATER CHARACTERISTICS

Voltage, a-c or d-c	50 volts
Tap Voltage	7.5 volts
Current	0.15 amp
Peak heater-cathode voltage, max.	
Heater negative to cathode	330 volts
Heater positive to cathode	330 volts

Operation without panel lamp.



ELECTRICAL DATA

MAXIMUM RATINGS (Design maximum values)

Rectifier Service

Plate voltage, peak inverse	330 volts
Output current, d-c	
Without panel lamp	120 ma
With panel lamp and shunting resistor	110 ma
With panel lamp and no shunting resistor	70 ma
Plate current, peak steady state	0.72 amp
Heater tap voltage when panel lamp fails, rms	16.5 volts

CHARACTERISTIC

Tube Voltage Drop

Conducting 240 ma	21 volts
-------------------	----------

TYPICAL OPERATION

Half-wave Rectifier with Panel Lamp No. 40 or No. 47 †

Heater voltage (pin 3 to pin 4)	45	45	45	45	volts
Heater-tap voltage (pin 4 to pin 6)	5.5	5.5	5.5	5.5	volts
Heater current between pins 3 and 6	150	150	150	150	ma
A-c plate supply voltage, rms	117	117	117	117	volts
Filter input capacitor	40	40	40	40	μf
Total effective plate-supply impedance	15	15	15	15	ohms
Panel lamp shunting resistor	450	200	100	75	ohms
D-c output current	70	80	90	100	ma

Half-wave Rectifier without Panel Lamp

Heater voltage (pin 3 to 4)	50 volts
Heater tap voltage (pin 4 to 6)	7.5 volts
Heater current between pins 3 and 4	150 ma
A-c plate supply voltage, rms	117 volts
Filter input capacitor	40 μf
Total effective plate supply impedance	15 ohms
D-c output current	110 ma
D-c output voltage at filter input, approx.	
For d-c output current of 55 ma	130 volts
For d-c output current of 110 ma	110 volts

†Typical current same as for tube type 35W4.




7025



Low noise, low hum phase inverter or resistance-coupled audio amplifier

HEATER CHARACTERISTICS

	Series	Parallel
Voltage, a-c or d-c	12.6	6.3 volts
Current	150	300 ma
Peak heater-cathode voltage, max.		
Heater negative to cathode	200	200 volts
Heater positive to cathode*	200	200 volts
*D-c component must not exceed 100 volts max.		



The 7025 is identical to type 12AX7 except for the low noise and hum voltage of the 7025 as shown in the measured values below:

EQUIVALENT NOISE AND HUM VOLTAGE

Referred to Grid, Each Unit

Average value, rms

1.8 μ volts

Conditions of measurement: Parallel heater connection, 6.3V a-c; grounded heater-transformer center-tap; $E_{bb}=250V$; $R_1=10k$; $R_K=2700\Omega$, bypassed by $100\mu f$; $R_L=0$; amplifier frequency range of 25 to 10,000 cps.

Maximum value, rms

7 μ volts

Conditions of measurement: same as for "average value" except R_K is unbypassed, $R_L=50,000$ ohms.


CBS

ADDITIONAL RECEIVING TUBES

TYPE	DESCRIPTION					CATHODE	MAXIMUM RATINGS§				SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION							TYPE	
	CLASS*	BASING	BASE & PINS	VOLTS	AMPERES		PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS		APPLICATION	PLATE VOLTS	SCREEN VOLTS	CONTROL GRID VOLTS OR CATHODE RES.	PLATE MA.	SCREEN MA.	TRANSCONDUCTANCE μmhos		PLATE OR LOAD RESISTANCE (Ω)
1AG4	P	1AG4	Submin.	1.25♠	.04	90	90			Power Amplifier	41.4	41.4	-3.6	2.4	0.6	1000	12,000		35mW	1AG4
1AG5	D P	1AG5	Submin.	1.25♠	.03	50	50			Detector- Amplifier	45 22.5	45 22.5	-2 0	0.28 0.17	0.12 .043	250 235	2.5m 0.7m			1AG5
1AK4	P	1AK4	Submin.	1.25♠	.02					RF Amplifier	45 67.5	45 Note 1	0 0	0.75 0.75	0.2 0.2	750 750	1.5m 2.0m	(Note 1: 67.5 Volts Thru 0.11m Res.)		1AK4
1AK5	D P	1AG5	Submin.	1.25♠	.02					Detector- Amplifier	45	45	0	0.5	0.2	280	0.4m			1AK5
3B2	D	8GH	Octal	3.15	0.22	P.I.V. = 25 kVdc Ib = 1.1 mAdc				TV High Voltage Rectifier	135 volt tube drop at Ib = 7ma.							3B2		
4CE5	P	7BD	Min. 7	4.2●	.45	300	150	2	0.5	RF Amplifier	125	125	-1.0	11	2.8	7600	0.3m			4CE5
4EW6	P	7CM	Min. 7	4.2●	0.6	330†	165†	3.1†	0.65†	TV IF Amplifier	125	125	56Ω	11	3.2	14,000	0.2m		Ec ₃ = 0	4EW6
5BS8	TR+TR	9AJ	Min. 9	5.6●	0.45	150		2		Class A Amplifier VHF Cascode Amplifier	150 250		220Ω -1.0	10 16		7200 10,000	5000 —	36 —		5BS8
5BZ7	TR+TR	9AJ	Min. 9	5.6●	0.45	250		2		Class A Amplifier (VHF Cascode Amplifier)	150		220Ω	10		6800	5300	36		5BZ7

5CL8A	TR TE	9FX	Min. 9	4.7 [◆]	0.6	300 300	— 150	2.7 2.8	— 0.5	Oscillator Mixer	125 125 100	— 125 100	56 Ω —1.0 0	15 12 —	— 4.0 —	8000 6400 8200	5,000 0.1m —	40 — —	5CL8A
5CR8	TR P	9GJ	Min. 9	4.7 [◆]	0.6	330 330	— 165	2.75 2.3	— 0.55	TV IF Amplifier	125 125	— 125	—2 56 Ω	12 13	— 3	4000 7700	5500 0.3m	22 —	5CR8
5EA8	TR P	9AE	Min. 9	4.7 [◆]	0.6	330 [†] 330 [†]	— 165 [†]	3.0 [†] 3.1 [†]	— 0.55 [†]	Oscillator Mixer	150 125	— 125	56 Ω —1.0	18 12	— 4.0	8500 6400	5000 80,000	40 —	5EA8
5EH8	TR P	9JG	Min. 9	4.7 [◆]	0.6	300 [†] 300 [†]	— 150 [†]	2.5 [†] 2.8 [†]	— 0.5 [†]	VHF Oscillator Mixer	125 125 100	— 125 70	—1.0 —1.0 0	13.5 12 9	— 4.0 —	7500 6000 6500	— 0.17m —	40 — —	5EH8
5R4GYA	D+D	5T	Octal	5.0	2.0	P.I.V. = 2800 V			Full-Wave Rectifier	900 Volts RMS per plate, 150 Ma. D-C Output, Condenser Input Filter. 950 Volts RMS per plate, 175 Ma. D-C Output, Choke Input Filter.								5R4GYA	
5V3	D+D	5T	Octal	5.0	3.8	P.I.V. = 1400 V			Full-Wave Rectifier	425 Volts RMS per plate, 350 Ma. Output Current, Condenser Input Filter 500 Volts RMS per plate, 350 Ma. Output Current, Choke Input Filter.								5V3	
6AN8A	TR P	9DA	Min. 9	6.3 [◆]	0.45	300 300	— 150	2.6 2.0	— 0.5	Oscillator Video Amplifier	200 200	150	—6 180 Ω	13 9.5	— 2.8	3300 6200	5750 0.3m	19 —	6AN8A
6BW4	D+D	9DJ	Min. 9	6.3	0.9	P.I.V. = 1275 V			Full-Wave Rectifier	325 V. RMS per plate, 100 Ma. Output Current, Condenser Input Filter. 450 V. RMS per plate, 160 Ma. Output Current, Choke Input Filter.								6BW4	
6BX8	TR+TR	9AJ	Min. 9	6.3	0.4	150	20	2 —	—	Class A Amplifier Cascode (VHF) Operation	65 125	—	—1.0 —0.5	9 11	—	6700 7500	—	25 —	6BX8
6BY4	TR	6BY4	—	6.3	0.25	300	—	1.1	—	Class A Amplifier UHF Amplifier	200 200	—	200 Ω 200 Ω	5 5	—	6000 —	16,700 —	100 —	6BY4
6BZ8	TR+TR	9AJ	Min. 9	6.3	0.4	250	—	2.2	—	Class A Amplifier Cascode RF Amplifier	125 250	—	100 Ω —0.5	10 15	—	8000 10,000	5600 —	45 —	6BZ8
6CH7	TR+TR	9FC	Min. 9	6.3	0.4	250	—	2.0	—	Class A Amplifier (Cascode VHF Operation)	150	—	220 Ω	10	—	6800	5300	36	6CH7
6CL5	P	8GD	Octal	6.3	2.5	700 DC 7000 Pk	200	25	4	Horizontal Deflection Amplifier	175 80	175 100	—40 0	90 280	7 20	6500 —	6000 —	—	6CL5

* Classification of tubes.

D—Diode, D + D—Duodiode, H—Heptode, P—Pentode, TE—Tetrode,
TR—Triode, TR1—Triode Section 1, TR2—Triode Section 2, TR + TR—
Duodiode with identical sections.

◆ Directly heated cathode or filament.

● Warm-up time of 11 seconds (average) for use in series heater strings.

§ Design center values unless noted.

† Design maximum values.

m Load resistance.

m Megohm.

Additional Receiving Tubes (continued)

TYPE	DESCRIPTION					CATHODE	MAXIMUM RATINGS [§]				SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION								
	CLASS*	BASING	BASE & PINS	VOLTS	AMPERES		PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS		APPLICATION	PLATE VOLTS	SCREEN VOLTS	CONTROL GRID VOLTS OR CATHODE RES.	PLATE MA.	SCREEN MA.	TRANSCONDUCTANCE μ mhos	PLATE OR LOAD [¶] RESISTANCE (Ω)	AMP. FACTOR (μ)
6CM8	TR P	9FZ	Min. 9	6.3 [●]	0.45	300 300	— 150	1.0 2.0	— 0.5	Class A Amplifier Video Amplifier	250 200	— 150	— 180 Ω	1.8 9.5	— 2.8	2000 6200	50,000 0.6m	100 —		6CM8
6CR8	TR P	9GJ	Min. 9	6.3 [●]	0.45	330 [†] 330 [†]	— 165 [†]	2.75 [†] 2.3 [†]	— 0.55 [†]	Class A Amplifier TV IF Amplifier	125 125	— 125	— 56 Ω	12 13	— 3	4000 7700	5500 0.3m	22 —		6CR8
6CS8	TR P	9FZ	Min. 9	6.3 [●]	0.45	330 [†] 330 [†]	— 165 [†]	2.75 [†] 2.3 [†]	— 0.55 [†]	Class A Amplifier TV IF Amplifier	125 125	— 125	— 56 Ω	12 13	— 3	4000 7700	5500 0.3m	22 —		6CS8
6DG7	P	9BA	Min. 9	6.3	0.3	300	125	3	0.6	IF Amplifier	250 100	100 100	68 Ω 68 Ω	11 10.8	4.2 4.4	4400 4300	1m 0.25M		$E_{c3}=0$ $E_{c2}=0$	6DG7
6DR7	TR1 TR2	9HF	Min. 9	6.3	0.9	330 [†] 275 [†] 1500 PK		1.0 [†] 7.0 [†]		Vertical Deflection Osc. Vertical Deflection Ampl.	250 150		—3 —17.5	1.4 35		1600 6500	40,000 925	68 6		6DR7
6DT8	TR+TR	9DE	Min. 9	6.3	0.3	300		2.5		RF Amplifier & FM Tuner Osc-Mixer.	250 100		200 Ω 270 Ω	10 3.7		5500 4000	10,900 15,000	60 60		6DT8
6DW5	P	9CK	Min. 9	6.3	1.2	330 [†] 2200 Pk	220 [†]	11 [†]	2.5 [†]	Vertical Deflection Amplifier	200 60	150 150	—22.5 0	55 260	2 20	5500	15,000			6DW5
6DZ8	TR P	9EX	Min. 9	6.3	0.9	150 150	— 135	0.75 6.5	— 1.5	Audio Amplifier	120 145	— 120	1500 Ω 180 Ω	0.8 45	— 6	1400 7500	— 2500	100 —		6DZ8
6EF6	P	7S	Octal	6.3	0.9	250 2000 Pk	250	10	2	Vertical Deflection Amplifier	250 75	250 250	—18 0	50 170	2 17	5000 —				6EF6

6EW6	P	7CM	Min. 7	6.3	0.4	330†	165†	3.1†	0.65†	TV IF Amplifier	125	125	56Ω	11	3.2	14,000	0.2m		Ec ₃ =0	6EW6	
6FH6	P	6AM	Octal	6.3	1.2	770† 6000 Pk	220†	17†	3.6†	Horizontal Deflection Amplifier	250 60	150 150	-22.5 0	75 300	1.7 15	6000 —	12,000 —			6FH6	
7EY6	P	7AC	Octal	7.2●	0.6	350† 2500 Pk	300†	11†	2.75†	Vertical-Deflection Amplifier	250 50	250 250	-17.5 0	44 153	3 21	4400 —	60000 —			7EY6	
8BN8	D+D TR	9ER	Min. 9	8.4●	0.45	300		1.5		Detector (Each Diode) Triode Amplifier	(I _b = 50mA at 10 Volts applied) (2.6 Volt Tube Drop at I _b = 9mA.)										8BN8
											250 100		-3 -1	1.6 1.5		2500 3500	28,000 21,000	70 75			
8CY7	TR1 TR2	9EF	Min. 9	7.9●	0.6	350† 350† 1800 Pk		1.0† 5.5†		TV Vert. Defl.-Osc. (TR1) TV Vert. Defl. Ampl. (TR2)	250 60 150		-3 0 620Ω	1.2 80 30		1300 — 5400	52,000 — 920	68 — 5			8CY7
9DZ8	TR P	9EX	Min. 9	9.0	0.6	150 150	— 135	0.75 6.5	— 1.5	Audio Amplifier	120 145	— 120	1500Ω 180Ω	0.8 45	— 6	1400 7500	— 2500	100 —			9DZ8
9EF6	P	7S	Octal	9.4●	0.6	250 2000 Pk	250	10	2	Vertical Deflection Amplifier	250 75	250 250	-18 0	50 170	2 17	5000 —				9EF6	
12AD7	TR+TR	9A	Min. 9	12.6 6.3	0.225 0.45	300		1.0		Non-Microphonic, Low-Hum Audio Preamplifier	250		-2	1.25		1600	62,500	100		12AD7	
12BW4	D+D	9DJ	Min. 9	12.6	0.45	P.I.V. = 1275 V.				Full-Wave Rectifier	325 V. RMS per plate, 100 ma. Output Current, Condenser Input Filter. 450 V. RMS per plate, 100 ma. Output Current, Choke Input Filter.										12BW4
12DE8	D P	12DE8	Min. 9	12.6	0.2	I _b = 5mA 30	30			Diode Detector RF Amplifier	5 Volt Tube Drop at I _b = 20mA. 12.6 12.6		-0.8	1.3	0.5	1500	0.3m		Ec ₃ = 0	12DE8	
12DF7	TR+TR	9A	Min. 9	12.6 6.3	0.15 0.30	300		1.0		Non-Microphonic, Low-Hum Input Voltage Amplifier	250 100		-2 -1	1.2 0.5		1600 1250	55,000 70,000	100 100		12DF7	
12DK7	D+D Tt	9HZ	Min. 9	12.6	0.5	30	30	0.5		Detector & AVC Diode Power Amplifier	10 Volt Tube Drop at I _b = 1.0mA. 12.6 12.6		—	6.0	1.0	5000	3500 ^m			12DK7	
12DQ7	P	9BF	Min. 9	12.6 6.3●	0.3 0.6	330†	165†	6.5†	1.1†	Video Amplifier	200 40	125 125	68Ω 0	26 45	5.6 16	10,500 —	53,000 —		Ec ₃ = 0	12DQ7	

* Classification of tubes.

D—Diode, D + D—Duodiode, H—Heptode, P—Pentode, TE—Tetrode,
TR—Triode, TR1—Triode Section 1, TR2—Triode Section 2, TR + TR—
Duotriode with identical sections.

◆ Directly heated cathode or filament.

● Warm-up time of 11 seconds (average) for use in series heater strings.

§ Design center values unless noted.

† Design maximum values.

■ Load resistance.

m Megohm.

Additional Receiving Tubes (continued)

TYPE	DESCRIPTION					CATHODE	MAXIMUM RATINGS§				SERVICE	AVERAGE CHARACTERISTICS AND TYPICAL OPERATION								
	CLASS*	BASING	BASE & PINS	VOLTS	AMPERES		PLATE VOLTS	SCREEN VOLTS	PLATE WATTS	SCREEN WATTS		APPLICATION	PLATE VOLTS	SCREEN VOLTS	CONTROL GRID VOLTS OR CATHODE RES.	PLATE MA.	SCREEN MA.	TRANSCONDUCTANCE μ mhos	PLATE OR LOAD RESISTANCE (Ω)	AMP. FACTOR(μ)
12DT5	P	9HN	Min. 9	12.6 \oplus	0.6	315† 2200 Pk	285†	9†	2†	Vertical Deflection Ampl. for 110° Deflection Angle	250 75 60	250 250 150	-16.5 0 0	38 180 100	2 35 15	6200 — —				12DT5
12DT8	TR+TR	9DE	Min. 9	12.6	0.15	300		2.5		RF Amplifier & FM Tuner Oscillator-Mixer	250 100	— —	200 Ω 270 Ω	10 3.7	— —	5500 4000	10,900 15,000	60 60		12DT8
12DW5	P	9CK	Min. 9	12.6 \oplus	0.6	330† 2200 Pk	220†	11†	2.5†	Vertical Deflection Amplifier	200 60	150 150	-22.5 0	55 260	2 20	5500 —	15,000 —			12DW5
12DY8	TR TE	9JD	Min. 9	12.6	0.35	16† 16†	— 16†			Relay Service in "Signal Seeker" Applications	12.6 12.6	— 12.6	0 2.2m	1.2 14	— 2	6000 2000	5000 10,000	20 —		12DY8
12DZ8	TR P	9EX	Min. 9	12.0	0.45	150 150	— 135	0.75 6.5	— 1.5	Audio Amplifier	120 145	— 120	1500 Ω 180 Ω	0.8 0.45	— 6	1400 7500	— 2500	100 —		12DZ8
12EC8	TR P	9FA	Min. 9	12.6	0.225	16† 16†	— 16†			VHF Oscillator-Mixer	12.6 12.6	— 12.6	0 0	2.4 0.66	— 0.28	4700 2000	6000 0.75m	25 —		12EC8
12EF6	P	7S	Octal	12.6 \oplus	0.45	250 2000 Pk	250	10	2	Vertical Deflection Amplifier	250 75	250 250	-18 0	50 170	2 17	5000 —				12EF6
12EZ6	P	7BK	Min. 7	12.6	0.175	30	30			RF Amplifier	14 12.6	14 12.6	-0.8 -0.7	2.3 1.9	0.85 0.7	3000 2700	0.30m 0.40m		Ec ₃ =0	12EZ6
12FA6	H	7CH	Min. 7	12.6	0.15	30	30			Osc.-Mixer { Self-Exc. Ext.-Exc.	12.6 12.6	Osc. Grid 2.5 0.85	Grid #3 0.5 0	.45 .67	Osc. Grid 60 μ a 45 μ a	320 300	0.8m —			12FA6
											Grids #2 & 4 tied to plate. Grid #1 Resistance = 33K Ω									

12FM6	D+D TR	7DT	Min. 7	12.6	0.15	30				Detector AF Voltage Amplifier	10 Volt Tube Drop at $i_b = 2\text{mA}$.				1300	7700	10		12FM6	
											12.6	—	1.0	—	2400	5600	13.5			
12G8	TR1 TR2	9CZ	Min. 9	12.6	0.4	16†				Direct Coupled AF Driver for Transistor (TR1-Input, TR2-Output)	12.6	—	0	3.0 (TR1)	2600	8500	22	—	12G8	
											12.6	—	0	7.2 (TR2)	(TR1+TR2)	2000 ^m	—	25mW		
13DE7	TR1 TR2	9HF	Min. 9	13●	0.45	330† 275†	—	1.5† 7.0†	—	Vertical Defl. Osc. Vertical Defl. Ampl.	250	—	-11.5	5.5 35	2000	6500	17.5	6.0	13DE7	
13DR7	TR1 TR2	9HF	Min. 9	13●	0.45	330† 275†	—	1.0† 7.0†	—	Vertical Defl. Osc. Vertical Defl. Ampl.	250	—	-3.0 -17.5	1.4 3.5	1600	40,000 925	68	6.0	13DR7	
17BQ6GT	P	6AM	Octal	16.8●	0.45	550 5500 Pk	175	11	2.5	Horizontal Deflection Amplifier	250	150	-22.5	55 225	2.1 25	5500	20,000	—	—	17BQ6GT
											150	150	-22.5	(Triode Operation)	—	—	—	4.3		
17C5	P	7CV	Min. 7	16.8●	0.45	135	117	5.5	1.25	Power Amplifier	120	110	-8	49	4.0	7500	2500 ^m	—	1.9W	17C5
17R5	P	7CV	Min. 7	16.8●	0.45	150 1500 Pk	150	4.5	1.0	Vertical Deflection Amplifier	110	110	-8.5 0	40 120	3.3 17	7000	13,000	—	—	17R5
18DZ8	TR P	9EX	Min. 9	18.0	0.3	150 150	— 135	0.75 6.5	— 1.5	Audio Amplifier	120	—	1500Ω	0.8	—	1400	—	100	—	18DZ8
											145	120	180Ω	0.45	6	7500	2500	—	—	
6973	P	9EU	Min. 9	6.3	0.45	400	300	12	2	Push-Pull AF Power Amplifier Class AB ₁ — Pentode Connection	400	290	-25	50	2.5	—	8000 ^m	Dist. 2%	24w output	6973
											350	280	-22	58	3.5	—	7500 ^m	1.5%	20w output	
											250	250	-15	92	7.0	—	8000 ^m	2%	12.5w output	
6973						375		12	1.75	Push-Pull AF Power Amplifier Class AB ₁ —G ₂ connected to tap on out- put transformer. Class A ₁ Characteristics	375		-33.5			—	12,500 ^m	1.5%	18.5w output	6973
																—	—	—	—	
											250	250	-15	46	3.5	4800	73,000	—	—	

* Classification of tubes.

D—Diode, D + D—Duodiode, H—Heptode, P—Pentode, TE—Tetrode,
TR—Triode, TR1—Triode Section 1, TR2—Triode Section 2, TR + TR—
Duotriode with identical sections.

◆ Directly heated cathode or filament.

● Warm-up time of 11 seconds (average) for use in series heater strings.






















● Design center values unless noted.

† Design maximum values.



















‡ Load resistance.

m Megohm.

BASING DIAGRAMS FOR ADDITIONAL RECEIVING TUBES



BASING DIAGRAMS FOR ADDITIONAL RECEIVING TUBES



CBS**TELEVISION PICTURE TUBES (Monochrome Types)**

TYPE	GENERAL DESCRIPTION										RATINGS†			TYPICAL OPERATION		TYPE
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (µmf)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS		
8JP4	G, S, Re, A	Glass	105°	Self	8JL	9¾	5½ x 7½	No Coating	None	20,000	500	16,000	—	300	8JP4	
9QP4A*	G, S, Re	Glass	61°	Electro.	12AD	13½	6½ x 7½	No Coating	Single	6800	300	5500	0 to +400	200	9QP4A*	
14ATP4 ■	G, S, Re, A	Glass	85°	Electro.	12L	13½	9½ x 12½	500-1000	None	14,000	500	14,000 10,000	0 to +400 0 to +400	400 300	14ATP4 ■	
14AUP4*	G, S, Re, A	Glass	85°	Electro.	12L	13½	10½ x 13½	1000-1500	None	14,850	63●	12,000	0 to +350	50●	14AUP4*	
14AVP4	G, S, Re	Glass	105°	Electro.	8HR	11¾	9¾ x 12½	450-700	None	14,000	500	12,000	-50 to +350	300	14AVP4	
14AWP4*	G, S, Re, A	Glass	85°	Electro.	12L	13¾	10½ x 13½	800-1200	None	14,000	68●	14,000 12,000	0 to +400 -50 to +350	50● 50●	14AWP4*	
14WP4	G, S, Re, A	Glass	85°	Electro.	12L	13¾	10½ x 13½	800-1200	None	14,000	500	12,000 10,000	-50 to +350 -50 to +350	300 250	14WP4	
17BRP4	G, S, Re, A	Glass	105°	Electro.	8HR	12¾	12¾ x 15¾	1000-1500	Single	15,000	500	14,000	0 to +500	300	17BRP4	
17BWP4	G, S, Re, A	Glass	105°	Electro.	7FA	12¾	12¾ x 15¾	1000-1500	None	16,000	500	14,000	-50 to +350	300	17BWP4	
17CAP4	G, S, Re, A	Glass	105°	Electro.	8HR	12½	12¾ x 15¾	1000-1500	None	16,000	500	14,000	-50 to +350	300	17CAP4	

17CKP4	G, S, Re, A	Glass	105°	Electro.	8HR	12 $\frac{3}{8}$	12 $\frac{3}{8}$ x 15 $\frac{3}{4}$	1000-1500	None	15,000	500	14,000	0 to +500	300	17CKP4
17CLP4	G, S, Re, A	Glass	85°	Electro.	12L	16	12 $\frac{1}{2}$ $\frac{1}{32}$ x 15 $\frac{1}{2}$	1800-2300	Single	16,000	500	14,000	-48 to +264	300	17CLP4
17CNP4	G, S, Re, A	Glass	85°	Electro.	12L	15 $\frac{1}{16}$	12 $\frac{7}{32}$ x 15 $\frac{7}{32}$	1000-1500	None	16,000	70●	14,000	0 to +400	50●	17CNP4
17CRP4*	G, S, Re, A	Glass	85°	Electro.	12L	15	12 $\frac{1}{2}$ $\frac{1}{32}$ x 15 $\frac{1}{2}$	1700-2200	None	16,000	70●	14,000	0 to +350	50●	17CRP4*
17CSP4	G, S, Re, A	Glass	105°	Electro.	7FA	12 $\frac{3}{8}$	12 $\frac{3}{8}$ x 15 $\frac{3}{4}$	900-1400	None	16,000	500	14,000	-50 to +350	300	17CSP4
17CTP4*	G, S, Re, A	Glass	105°	Electro.	8HR	12 $\frac{1}{2}$ $\frac{1}{16}$	12 $\frac{3}{8}$ x 15 $\frac{3}{4}$	1000-1500	None	16,000	500	14,000	0 to +400	300	17CTP4*
17CVP4*	G, S, Re, A	Glass	105°	Electro.	8HR	12 $\frac{1}{2}$ $\frac{1}{16}$	12 $\frac{3}{8}$ x 15 $\frac{3}{4}$	1000-1500	None	16,000	500	14,000	0 to +400	300	17CVP4*
17CXP4	G, S, Re, A	Glass	85°	Electro.	12L	14 $\frac{1}{2}$ $\frac{1}{16}$	12 $\frac{3}{8}$ x 15 $\frac{3}{4}$	1000-1500	None	16,000	68●	14,000 12,000	-50 to +350 -75 to +325	50● 50●	17CXP4
21CMP4	G, S, Re, A	Glass	85°	Electro.	12L	19 $\frac{3}{8}$	16 $\frac{1}{2}$ x 20 $\frac{3}{8}$	2000-2500	Single	22,000 22,000●	550 700●	16,000 16,000●	-64 to +352 -20 to +308	300 300●	21CMP4
21CQP4	G, S, Re, A	Glass	105°	Electro.	7FA	14 $\frac{1}{2}$ $\frac{1}{16}$	16 $\frac{1}{2}$ x 20 $\frac{3}{8}$	2000-2500	None	17,800	500	16,000	-50 to +350	300	21CQP4
21CXP4	G, S, Re, A	Glass	85°	Electro.	12L	18 $\frac{3}{8}$	16 $\frac{1}{2}$ x 20 $\frac{3}{8}$	2000-2500	None	19,800	70●	18,000	0 to +350	50●	21CXP4
21CZP4	G, S, Re, A	Glass	105°	Electro.	8HR	15	16 $\frac{1}{2}$ x 20 $\frac{3}{8}$	2000-2500	Single	18,000	500	17,000	0 to +500	300	21CZP4
21DAP4	G, S, Re, A	Glass	105°	Electro.	8HR	15	16 $\frac{1}{2}$ x 20 $\frac{3}{8}$	2000-2500	None	18,000	500	16,000 14,000	0 to +400 0 to +400	400 300	21DAP4
21DEP4	G, S, Re, A	Glass	105°	Electro.	8HR	15	16 $\frac{1}{2}$ x 20 $\frac{3}{8}$	2000-2500	None	18,000	500	17,000	0 to +500	300	21DEP4

All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked.
 Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical,
 T—treated, A—aluminum.
 † Has heater voltage of 4.7 ±10% volts and heater current of 0.30 ampere.
 * Has heater voltage of 8.4 volts and heater current of 0.45 ampere.

† Design-center values.

* Internal magnetic unit to be used with external tubular magnetic shield.

§ For rectangular tubes, the horizontal deflection angle is given.

★ Has heater current of 0.45 ampere.

● With reference to Grid 1—Cathode Drive Design.

▼ Has heater voltage of 6.3 volts and heater current of 0.30 ampere.

Television Picture Tubes (continued)

TYPE	GENERAL DESCRIPTION										RATINGS†			TYPICAL OPERATION		TYPE
	FACE-PLATE (SEE NOTES)	ENVELOPE	DEFLECTION ANGLES	FOCUSING	BASING	MAX. OVER-ALL LENGTH (IN.)	MAX. DIAMETER OF HT. X WD. (IN.)	CAPACITANCE OF BULB COATING (μf)	ION TRAP MAGNET	ANODE VOLTS	GRID 2 VOLTS	ANODE VOLTS	FOCUSING VOLTS	GRID 2 VOLTS		
21DHP4	G, S, Re, A	Glass	105°	Electro.	8HR	15	16½ x 20½	1700-2500	None	17,800	500	16,000	0 to +400	300	21DHP4	
21DKP4*	G, S, Re, A	Glass	105°	Electro.	8HR	15	16½ x 20½	1700-2500	None	17,800	500	16,000	0 to +400	300	21DKP4*	
21DLP4	G, S, Re, A	Glass	85°	Electro.	12L	17¾	16½ x 20½	2000-2500	None	20,000	500	16,000 14,000	0 to +400 -50 to +350	300 300	21DLP4	
21DNP4	G, S, Re, A	Glass	85°	Electro.	12L	19¾	16½ x 20½	1200-1500	Single	19,800	500	16,000	-64 to +352	300	21DNP4	
21DQP4	G, S, Re, A	Glass	85°	Electro.	12L	17¾	16½ x 20½	2000-2500	None	18,000	500	16,000	-50 to +350	300	21DQP4	
21DRP4	G, S, Re, A	Glass	85°	Electro.	12L	18¾	16½ x 20½	2000-2500	None	20,000	500	16,000	0 to +450	300	21DRP4	
21DSP4	G, S, Re, A	Glass	85°	Electro.	12L	18¾	16½ x 21½	2000-2500	None	20,000	68●	16,000 14,000	0 to +400 -50 to +350	50● 50●	21DSP4	
24AEP4	G, S, Re, A	Glass	85°	Electro.	12L	19½	18¾ ₁₆ x 22 ¹ / ₁₆	2000-2500	None	20,000	500	18,000	-50 to +350	300	24AEP4	
24ALP4	G, S, Re, A	Glass	105°	Electro.	8HR	15¾ ₁₆	18¾ x 22 ¹ / ₁₆	2000-2500	None	20,000	500	17,000	0 to +500	300	24ALP4	
24ANP4	G, S, Re, A	Glass	85°	Electro.	12L	20½	18¾ ₁₆ x 22 ⁵ / ₆₄	1700-2500	Single	19,800	500	18,000	-72 to +396	300	24ANP4	

24AQP4*	G, S, Re, A	Glass	105°	Electro.	8HR	16 $\frac{3}{16}$	18 $\frac{1}{16}$ x 22 $\frac{1}{16}$	1700-2500	None	19,800	500	16,000	0 to +400	300	24AQP4*
24ASP4†	G, S, Re, A	Glass	85°	Electro.	12L	19 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{3}{16}$	1700-2500	None	19,800	500	18,000	0 to +400	300	24ASP4†
24ATP4	G, S, Re, A	Glass	85°	Electro.	12L	19 $\frac{1}{2}$	18 $\frac{1}{16}$ x 22 $\frac{3}{16}$	2000-2500	None	20,000	68●	18,000 14,000	0 to +400 -50 to +350	50● 50●	24ATP4

All tubes in this section have heater ratings of 6.3 volts and 0.6 ampere unless marked.

Face-Plate Code: C—clear, Cy—cylindrical, F—frosted, G—gray, Re—rectangular, Ro—round, S—spherical,

T—treated, A—aluminized.

◆ Has heater voltage of 4.7 ±10% volts and heater current of 0.30 ampere.

● Has heater voltage of 8.4 volts and heater current of 0.45 ampere.

†Design-center values.






* Internal magnetic unit to be used with external tubular magnetic shield.

§ For rectangular tubes, the horizontal deflection angle is given.

★ Has heater current of 0.45 ampere.

● With reference to Grid 1—Cathode Drive Design.

▼ Has heater voltage of 6.3 volts and heater current of 0.30 ampere.





GERMANIUM AND SILICON DIODES

Type	Outline Drawing	MAXIMUM RATINGS, 25°C ambient					ELECTRICAL CHARACTERISTICS, 25°C ambient					Description
		Peak Reverse Voltage	Operating Reverse Voltage	Forward Current, ma			Minimum Forward Current at +1V ma	Maximum Reverse Current				
				Average ††	Recurrent Peak	Surge 1 sec.		Volts	µa	Volts	µa	
1N34 1N34A 1N35* 1N38, 1N38A, 1N38B 1N39, 1N39A	A & B A & B A A & B B	75 75 75 120 225	60 60 60 100 200	40 50 50 50 50	150 150 150 150 150	500 500 500 500 200	5.0 5.0 7.5 Δ 4.0 to 25.0 5.0	-10 -10 -10 -3 -100	50 30 10 6 65	-50 -50 -50 -100 -200	500 500 500 500 325	General Purpose General Purpose Matched Pair High Reverse Voltage High Reverse Voltage
1N40* 1N42* 1N48 1N51 1N52	D D A & B A & B A & B	75 125 85 50 85	60 100 70 40 70	40 50 50 25 50	150 150 150 100 150	500 500 400 300 400	12.75 at 1.5V Δ 12.75 at 1.5V Δ 4.0 2.5 4.0	-10 -3 -50 -50 -50	50 6 833 1660 150	-50 -100 -50 -50 -50	600 625 600 300 500	Quad Demodulator Quad Demodulator General Purpose Detector General Purpose General Purpose
1N54 1N54A 1N55, 1N55A 1N55B 1N56, 1N56A	A & B A & B B A A & B	50 75 170 190 50	35 50 150 150 40	40 50 50 30 60	150 150 150 150 200	500 500 500 500 1000	5.0 5.0 4.0 5.0 15.0	-10 -10 -100 -150 -30	10 7 300 500 300	-50 -150 -500 -500 -500	60 500 500 500 300	General Purpose General Purpose Gen. Purpose, High Reverse Voltage Gen. Purpose, High Reverse Voltage High Conduction
1N58, 1N58A 1N60 1N63 1N64 1N65	A & B A A & B A & B A & B	120 30 125 20 85	100 25 100 15 70	50 30 50 50 50	150 150 150 150 150	500 500 400 400 400	5.0 3.0 4.0 4.0 2.5	-100 -100 -50 -50 -50	600 600 50 50 200	-50 -50 -10 -10 -50	67 67 200 200 200	High Reverse Voltage Video Detector General Purpose Video Detector General Purpose
1N67, 1N67A 1N68A 1N69, 1N69A 1N70, 1N70A 1N71*	A & B A B B D	100 130 75 125 50	80 100 60 100 40	35 30 40 30 60	100 100 125 90 200	500 500 400 350 1000	4.0 3.0 5.0 to 25.0 3.0 to 25.0 15.0 Δ	-5 -100 -10 -10 -30	5 625 30 25 300	-50 -50 -50 -50 -50	50 500 500 500 300	Gen. Purpose, High Reverse Resistance Gen. Purpose, High Reverse Voltage General Purpose General Purpose Quad, High Conductance Bridge Ckt.

1N73*	D	75	60	22.5	60	100	15 at 1.3 to 1.7V Δ	-10	50			Quad, Bridge Circuit
1N74*	D	75	60	22.5	60	100	15 at 1.2 to 1.8V Δ	-10	50			Quad, Bridge Circuit
1N75	A & B	125	100	50	150	400	2.5	-50	50			General Purpose
1N81, 1N81A	B	50	40	30	90	350	3.0 to 25.0	-10	10			General Purpose
1N82A†	A, B & C						Designed for efficient low-noise mixer operation from 470 to 890 mc					Silicon—UMF Mixer
1N90	A	75	60	40	150	500	5.0	-50	800			General Purpose
1N116	A	75	60	30	—	—	5.0	—	—	-50	100	High Resistance, Gen. Purpose
1N126, 1N126A	A	75	60	30	90	350	5.0 to 25.0	-10	50	-50	300	General Purpose, JAN
1N127, 1N127A	A	125	100	30	90	300	3.0 to 25.0	-10	25	-50	200	General Purpose, JAN
1N128	A	50	40	30	90	300	3.0	-10	10			General Purpose, JAN
1N191‡	A	105	70	50	150	500	5.0	-10	25	-50	125	Computer, Fast Recovery Time (IBM Type F)
1N192‡	A	80	55	50	150	500	5.0	-10	50	-50	250	Computer, Fast Recovery Time (IBM Type G)
1N198 at 25°C	A	100	80	30	90	300	4.0	-10	10	-50	40	High Temp., High Reverse Resistance, JAN
at 75°C			60				5.0	-10	75	-50	250	
1N636	A	60	45	30			2.5	-10	10			High Resistance, Gen. Purpose

INDIUM-BONDED JUNCTION DIODES†

1N270	A	75	60	90	325		200	-10	-75 at 75°C	-50	100	Computer
1N276	A	100	80	40	150		40	-10	20	-50	100	Computer (IBM Type W)
1N497	A	30	20	80	250		100	-20	20			Computer
1N498	A	50	40	80	250		100	-40	25			Computer
1N499	A	65	50	80	250		100	-50	30			Computer
1N500	A	75	60	80	250		100	-60	40			Computer
1N501	A	100	80	80	250		100	-80	40			Computer
1N502	A	125	100	80	250			-100	50			Computer
1N699	A	105 at 70°C	80	80	250		100	-75 at 70°C	250			Computer (Burroughs Type H)

†Units are tested for noise figure in instruments designed to correlate with customer applications.

*Characteristics are for each diode.

‡Reverse characteristics measured at 55°C.

†Boned diode reverse recovery test using JETEC 14.5-1 (IBM Modified Y) test kit. 1N699:

Recovery to 50K within $t = 0.3\mu s$. All others: Recovery to 80K within $t = 0.3\mu s$.

††All glass point-contact diodes are rated at 30 mA for 80 mW dissipation. Currents given over 30 mA are for the plastic case.

Δ Matching 1N35—Current at +1.0V matched within 10%.


1N40, 1N42—Resistance of diodes in each pair matched within 3Ω at +1.5V.

1N71—Current of all four diodes matched within 1 ma at +1.0V.

1N73—Resistance of diodes in each pair matched within 2Ω at +15.0 ma d-c.


1N74—Resistance of diodes in each pair matched within 6.7Ω at +15.0 ma d-c.

PHYSICAL TYPES AVAILABLE FOR GERMANIUM AND SILICON DIODES

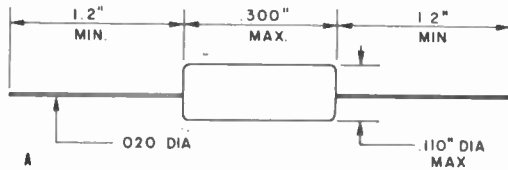


**GLASS-ENCASED
DIODE**


EIA standard color code bands are placed on the cathode end of all CBS-Hytron subminiature glass diodes. The three-band color code reads from left to right and indicates the figures following the "1N" prefix.

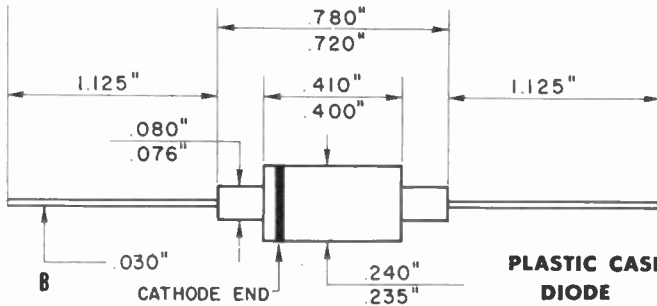

**PLASTIC CASE
DIODE**



**PLASTIC CASE DIODE
... CLIP-IN TYPE**

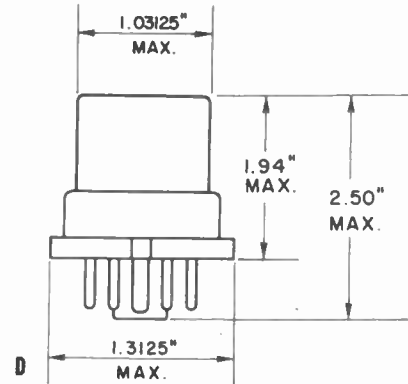

**QUAD WITH STANDARD
OCTAL BASE WILL BE
SUPPLIED FOR ANY CBS DIODE**