

OCTOBER 27, 1977

ANNUAL TECHNOLOGY UPDATE ISSUE

Growing families of complex digital chips strengthen the microprocessor's hold on new developments/90

FOUR DOLLARS A MCGRAW-HILL PUBLICATION


Electronics®

1420 N. 113th CAMAS NOV80
MATT NEILL
ELECTRONIC SPECIAL EFFECTS
2916 NE CLACKANAS
PORTLAND OR
97232

CHARLES H. HOUSE



B. J. MOORE

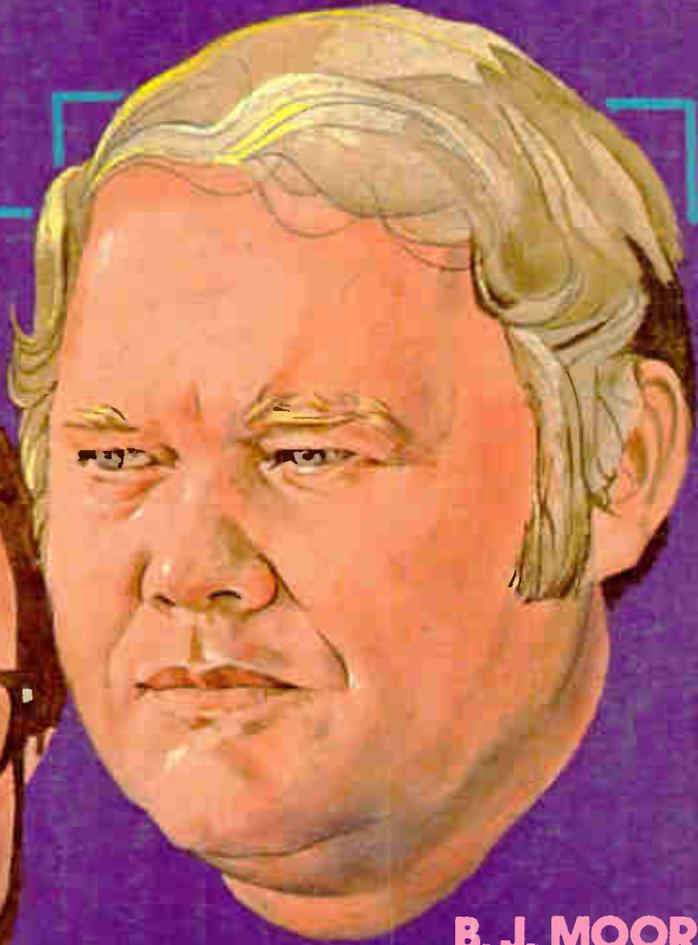

1977 AWARD FOR ACHIEVEMENT

Another Colorful Innovation...

Conductive Plastic Trimmers at Carbon Prices.

Just when you thought "low cost" also meant "low performance", along comes the dazzling new Bourns® Model 3355. Compare it to the CTS 201, Mepeco 46X or Piher PT15. Our revolutionary conductive plastic element vs. their carbon... fact is we outperform them all. To prove it, we spec important characteristics such as CRV at 1% and a TC of 500 PPM/°C... the others don't. And only the 3355 has board-wash capability, a UL-94V-1 flammability rating and an optional choice of nine rotor colors. The standard blue is priced at just 11¢ each (100,000 pieces)... about what you'd expect to pay for the lower performance carbon types.

Send today for complete details on a colorful new way to design in superior performance for your cost effective needs — the Model 3355 Trimmer. Direct or through your local distributor.

TRIMPOT PRODUCTS DIVISION, BOURNS, INC., 1200 Columbia Ave., Riverside, CA 92507. Phone: 714 781-5050 — TWX: 910 332-1252.

CATALOG SHEET SPECIFICATION COMPARISONS


CHARACTERISTIC	BOURNS 3355	CTS 201*	MEPECO 46X*	PIHER PT15*
Element	Conductive Plastic	Carbon	Carbon	Carbon
Temperature Coefficient	500 PPM/°C	No Spec	No Spec	1000 PPM/°C
Contact Resistance Variation	1.0% max.	No Spec	No Spec	No Spec
Power Rating	.25 W at 70°C	.25 W at 55°C	.25 W at 55°C	.25 W at 40°C
Flammability	UL-94V-1	No Spec	No Spec	UL-94
Board Wash Capability	Yes	No Spec	No Spec	No Spec

* Source: CTS Series 201 Data Sheet, Mepeco Data Sheet ME1004, Piher Data Sheet F-2002 Rev 7/73



International Marketing Affiliates: European Headquarters — Switzerland 042/23 22 42 • Belgium 02/218 2005 • France 01/2039633 • Germany 0711/24 29 36 • Italy 02/32 56 88 • Netherlands 70/27 44 00 • United Kingdom 01/572 6531 • Norway 2/71 18 72 • Sweden 764/20 110 • Japan 075/921 9111 • Australia 02/55-0411 03/95-9566 • Israel 77 71 15/5/7

For Immediate Application — Circle 120
For Future Application — Circle 220

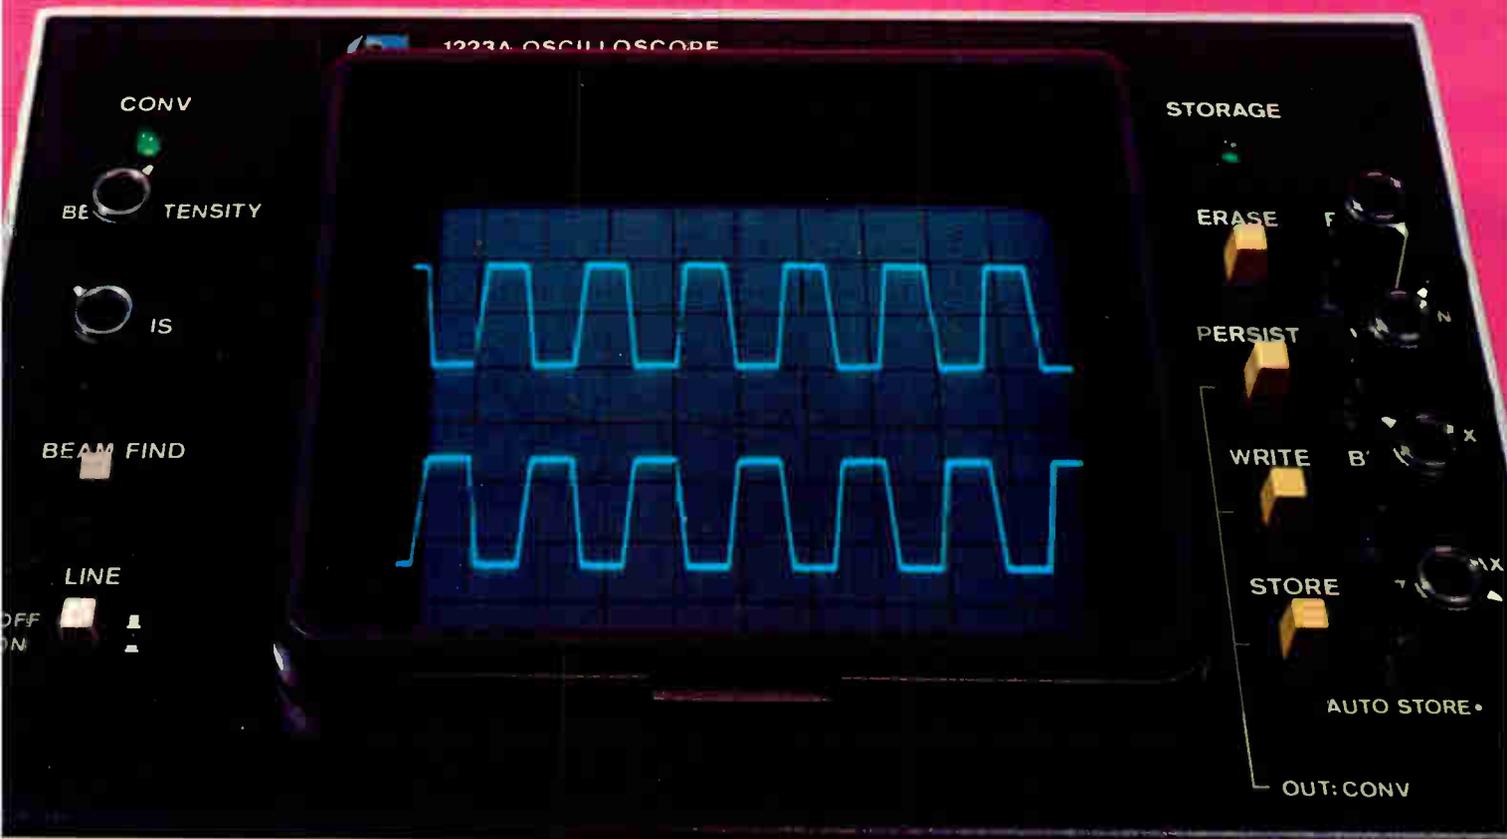

For a low cost way to capture fast transitions, glitches, low rep-rate signals and single-shot events...

HP's the Answer.

And the new **15MHz 1223A** with variable persistence/storage is your scope. Now, you don't need to pay for more capability than you need. Instead, you have the option of low-cost, variable persistence/storage scope that not only captures those elusive signals, but lets you see fast risetimes clearly for better glitch detection — something new for low-cost oscilloscopes. The 1223A provides variable persistence/storage and ease-of-use for only \$2250.*

Set it in Auto Store, walk away, and it's armed to capture and store an event for up to two hours. Vary the Brightness Control and you can optimize signal-to-background contrast. Vary the Persistence and you can integrate those glitches, very-low-frequency, and low-duty-cycle traces into clear displays or eliminate overriding noise. Adjust auto erase to the desired rate and you can update the



display without even touching the scope. Of course you can store a trace or erase a stored signal with the touch of a button.

And there's more: 2mV/div sensitivity, TV Sync, selectable chop/alternate sweep operation, variable trigger hold-off, and calibrated X-Y display. And you get traditional HP after-sale support.

Here's an economical answer for industrial lab and production applications such as electromechanical, industrial control and medical equipment design, testing and troubleshooting. Excellent capability at low-cost for education too. Your local HP field engineer has all the details. Give him a call today. In addition to the 1223A, ask him about the variable persistence storage in a high-performance 100MHz scope — HP's new 1741A.

*Domestic U.S.A. price only.

HEWLETT *hp* PACKARD

1507 Page Mill Road, Palo Alto, California 94304

For assistance call: Washington (301) 348-6370, Chicago (312) 255-9400, Atlanta (404) 955-1500, Los Angeles (213) 877-1281.

World Radio History

Circle 1 on reader service card

1812

Processor growth: can your small computer make the upgrade?

Product	Our HP 1000 and 21MX Computers	Your old favorite
Computers	<p>21MX computers, with memory capacity of 1.8 million bytes, speeds up to 350 ns, and user microprogramming. All have compatible architecture, instruction sets, I/O and memory.</p> <p><i>K-Series</i> computer on a board: \$974*</p> <p><i>M-Series</i> low-cost computer: \$2,698*</p> <p><i>E-Series</i> high-performance computer: \$3,803*</p> <p>Instructions 70-100% faster than M-Series.</p>	
Systems	<p>HP 1000 includes 21MX-E computer, CRT console with soft keys and dual cartridges. RTE operating system. Fault control memory available to 1.8 million bytes. Easy to upgrade as your needs expand, with full selection of HP manufactured and supported peripherals.</p> <p><i>Model 20.</i> 64K-byte memory-based systems: \$21,000. 500K-byte flexible discs optional.</p> <p><i>Model 30.</i> 64K-byte disc-based system, 15M-byte disc storage: \$36,500. 5M and 50M-byte discs available.</p> <p><i>Model 80.</i> 128K-byte data base management system with 15M-byte disc storage. HP-developed IMAGE DBM software, mag tape and line printer: \$61,700. 50M-byte discs available.</p>	
Software	<p><i>One upward-compatible family of Real Time Executives:</i> RTE manages 1.8 million bytes of main memory. BASIC, FORTRAN, Assembly and Microprogramming languages. Distributed Systems Networks. Measurement and control support.</p>	

*OEM quantity 100. All other prices U.S. domestic list.

If you've been having trouble making the upgrade with your old favorite, it's probably time you got a new one. So call your local HP sales office listed in the White Pages. Or write to Robert Puette, Hewlett-Packard, 11000 Wolfe Road, Dept. 612, Cupertino CA 95014. We don't think anyone should have to live with an incompatible family.



HEWLETT  PACKARD

39 Electronics Review

FIBER OPTICS: Plug-in modules to handle all systems chores, 39
Computer applications of fiber optics stirs interest at IBM, 40
PHOTOVOLTAICS: Silicon ribbon attains 3-in. widths, 41
DISPLAYS: Texas Instrument's flat CRT is simply a flat CRT, 42
AUTOMOTIVE: Electronics adjusts shocks, smooths ride, 42
MILITARY: Defense electronics to up its share of budget, 44
MEETINGS: Midcon show looks like a hit in Chicago, 46
NEWS BRIEFS: 50
SOLID STATE: RCA adds heat pipes to power devices, 50
FIBER OPTICS: Plastic cable works well in infrared, 50

63 Electronics International

GREAT BRITAIN: Microprocessors go to the front lines, 63
JAPAN: Simple microcomputer kit serenades user, 64

73 Probing the News

COMPUTERS: Speed of nonimpact printers may not be worth it, 73
ABROAD: Hungary's strength is communications, 76
COMPANIES: TRW logic devices spawn a division, 78

153 New Products

IN THE SPOTLIGHT: SBC-80 board has analog and digital outputs, 153
SEMICONDUCTORS: Rectifiers have linear forward-voltage drops, 154
DATA HANDLING: Graphics board is versatile, 165
SUBASSEMBLIES: Power hybrids are built from submodules, 174
COMMUNICATIONS: Test set cuts operating costs, 184
INDUSTRIAL: Temperature monitor offers dual set-points, 204
COMPONENTS: Resistors have low thermal emfs, 216
INSTRUMENTS: Calibrator has dc accuracy of 50 ppm, 222
MATERIALS: 230

Departments

Publisher's letter, 4
Readers' comments, 6
News update, 8
People, 14
Editorial, 24
Meetings, 26
Electronics newsletter, 33
Washington newsletter, 57
International newsletter, 61
New literature, 232

Services

Employment opportunities, 242
Reprints available, 256
Reader service card, 259



Cover: Award goes to instrument trailblazers, 82

For the independent and simultaneous development of the first logic analyzers, *Electronics* salutes Charles H. House, engineering manager for logic-analyzer programs at Hewlett-Packard's Colorado Springs division, and B. J. Moore, president of Biomation Corp.

Cover by Art Director Fred Sklenar.

TECHNOLOGY UPDATE, 90

The past year saw remarkable and widespread advances in the application of microprocessors and large-scale integrated circuitry. Moreover, it contained the promise of many more in the near future.

Semiconductors, 92: New MOS processes set speed and density records.

Memories & Microcomputers, 96: One-chip controllers and 4-k static RAMs star.

Computers, 104: Memory-oriented designs maximize throughput.

Components, 112: Converters adjust to LSI, and bi-FET operational amplifiers emerge.

Instruments, 120: Techniques evolve for servicing LSI-based equipment.

Communications, 126: Fiber optics and LSI expand system capacities.

Packaging & Production, 134: E-beam systems arrive, and flexible circuits flourish.

Consumer, 140: The digital takeover extends to television receivers and auto controls.

The year in electronics: a chronology, 148

And in the next issue . . .

A new method of accurately measuring time . . . high throughput from an electron-beam system . . . signature analysis plus in-circuit emulation finds faults in microprocessor-based systems.

EDITOR-IN-CHIEF: Kemp Anderson

EXECUTIVE EDITOR: Samuel Weber

MANAGING EDITOR: Arthur Erikson,
International

SENIOR EDITORS: Laurence Altman,
Ray Connolly, Lawrence Curran,
John Johnsrud, H. Thomas Maguire,
Stephen E. Scrupski, Gerald M. Walker

ART DIRECTOR: Fred Sklenar

ASSOCIATE EDITORS: Howard Wolff,
Alfred Rosenblatt

DEPARTMENT EDITORS

Aerospace/Military: Ray Connolly
Circuit Design: Vincent Biancomano
Communications & Microwave:

Richard Gundlach

Components: Lucinda Matterna

Computers: Raymond P. Capece

Consumer: Gerald M. Walker

Instrumentation: Stephen E. Scrupski

New Products: H. Thomas Maguire,

Michael J. Riezenman

Packaging & Production: Jerry Lyman

Solid State: Laurence Altman

CHIEF COPY EDITOR: Margaret Eastman

COPY EDITORS: Ben Mason, Mike Robinson

ART: Charles D. Ciatto, *Associate Director*
Paula Piazza, *Assistant Director*

EDITORIAL SECRETARIES: Janet Noto,
Penny Rothman

EDITORIAL ASSISTANT: Marilyn B. Rosoff

FIELD EDITORS

Boston: Lawrence Curran (Mgr.)

Los Angeles: Larry Waller (Mgr.)

Midwest: Larry Armstrong (Mgr.)

New York: Bruce LeBoss (Mgr.)

San Francisco: Bernard Cole (Mgr.)

Judith Curtis

Washington: Ray Connolly (Mgr.)

Frankfurt: John Gosch

London: William F. Arnold

Paris: Arthur Erikson

Tokyo: Charles Cohen

McGRAW-HILL WORLD NEWS

Editor: Michael Johnson

Brussels: James Smith

Milan: Andrew Heath

Moscow: Peter Hann

Paris: Andrew Lloyd

Stockholm: Robert Skole

Tokyo: Robert E. Lee

PUBLISHER: Dan McMillan

ADVERTISING SALES MANAGER:

Paul W. Reiss

MARKETING ADMINISTRATION MANAGER:

Wallis Clarke

CIRCULATION MANAGER: Karl Peterson

MARKETING SERVICES MANAGER:

Tomlinson Howland

RESEARCH MANAGER: Margery D. Sholes

Achievement is highly praiseworthy in any field of endeavor, and in electronics it is not only praiseworthy but tremendously influential. All around us, the fruits of electronics technology are visible, from television sets and radios to the latest consumer attractions, such as home computers and electronic games. Some of the fruits, of course, aren't so visible but are becoming even more pervasive. It's no wonder, then, that the individual achievements posted by the people in the electronics industry affect the lives and lifestyles of people everywhere.

Every year, *Electronics* magazine bestows its Award for Achievement as an acknowledgment of the vital importance of individual creativity in fueling the growth of electronics technology. Indeed the basic aim of the award is to spotlight the outstanding achievements that promote and advance technological progress or the general welfare of the electronics industries.

And every year, the editors of *Electronics* face the same tough task. They have to decide which of the hundreds of truly significant developments to honor with the award, isolating the one that both stands out from all the rest and best symbolizes the elusive quality that is called achievement.

The fourth annual award, which goes to Charles H. House of Hewlett-Packard Co. and B. J. Moore of Biomation Corp. for their digital-logic instruments, recognizes just such an achievement. The creation of a whole new class of instruments is not an everyday occurrence and reflects quite a creative tour de force. The fact that two quite separate approaches were taken—and

independently, at that—sort of doubles the creative content.

Before these instruments, which are logic-state and logic-timing analyzers, came on the scene, digital semiconductor technology had mushroomed. However, its rapid progress was being retarded somewhat by the need to work with conventional instrumentation designed for analog circuits. Thus was conceived the idea of designing instruments specifically for what has been called the data domain. Our award winners this year not only were among the first to perceive that need, but they realized the opportunities such instruments would create and, most important, saw the ways to do the job.

While their approaches were quite different, they opened new windows for the instrument designer. Since then, of course, the instrumentation line of both companies has expanded and there is some overlap in technique. What's more, their instrument-design departures started other people thinking about the special demands of the digital world, and other methods, such as signature analysis, have been launched.

For the full story on the *Electronics* Award for Achievement and this year's winners, turn to page 82. That story, though is just one of many features of this annual Technology Update issue. So for a summary of what has been happening in the past year in electronics, don't miss our 40-page special report starting on page 90.



October 27, 1977 Volume 50, Number 22 94,951 copies of this issue printed

Published every other Thursday by McGraw-Hill, Inc. Founder: James H. McGraw 1860-1948. Publication office 1221 Avenue of the Americas, N.Y., N.Y. 10020; second class postage paid at New York, N.Y., and additional mailing offices.

Executive, editorial, circulation and advertising addresses: Electronics, McGraw-Hill Building, 1221 Avenue of the Americas, New York, N.Y. 10020. Telephone (212) 997-1221. Teletype 12-7960 TWX 710-581-4879. Cable address: MCGRAW HILL L N E W Y O R K.

Subscriptions limited to professional persons with active responsibility in electronics technology. No subscriptions accepted without complete identification of subscriber name, title or job function, company or organization, and product manufactured or services performed. Based on information supplied, the publisher reserves the right to reject non-qualified requests. Subscription rates: In the United States and possessions \$14 one year, \$25 two years, \$35 three years; company addressed and company libraries \$20 one year, \$36 two years, \$50 three years; APO/FPO addressed \$35 one year only; Canada and Mexico \$16 one year, \$26 two years, \$40 three years; Europe \$40 one year, \$71 two years, \$100 three years; Japan, Israel and Brazil \$65 one year, \$115 two years, \$165 three years; Australia and New Zealand \$90 one year, \$170 two years, \$240 three years, including air freight; all other countries \$45 one year, \$80 two years, \$112 three years. Limited quota of subscriptions available at higher-than-basic rate for persons allied to field served. Check with publisher for these rates. Single copies: \$4.00. Please allow four to eight weeks for shipment.

Officers of McGraw-Hill Publications Company: Gordon L. Jones, President; Paul F. McPherson, Executive Vice-President; Group Vice-President: Gene W. Simpson; Senior Vice-Presidents: Russell F. Anderson; James E. Boddorf, Planning & Development; David G. Jensen, Manufacturing; Ralph R. Schulz, Editorial; Vice-Presidents: Denis C. Beran, European Operations; David P. Forsyth, Research; Douglas Greenwald, Economics; James E. Hackett, Controller; Robert L. Leyburn, Circulation; Edward E. Schirmer, Sales.

Officers of the Corporation: Harold W. McGraw, Jr., President, Chief Executive Officer, and Chairman of the Board; Robert N. Landes, Senior Vice President and Secretary; Ralph J. Webb, Treasurer.

Title registered in U.S. Patent Office; Copyright © 1977 by McGraw-Hill, Inc. All rights reserved. The contents of this publication may not be reproduced in whole or in part without the consent of copyright owner.

Subscribers: The publisher, upon written request to our New York office from any subscriber, agrees to refund that part of the subscription price applying to copies not yet mailed. Please send change-of-address notices or complaints to Fulfillment Manager; subscription orders to Circulation Manager, Electronics, at address below. Change-of-address notices should provide old as well as new address, including postal zip code number. If possible, attach address label from recent issue. Allow one month for change to become effective.

Postmaster: Please send form 3579 to Fulfillment Manager, Electronics, P.O. Box 430, Hightstown, N.J. 08520.


new

KEPCO/TDK

triple-output switching modules

for microprocessors and logic applications

The KEPCO/TDK series RMT combines a logic 5 Volt $\pm 10\%$, 10 ampere output with various combinations of auxiliary voltages (see table). All outputs are stabilized by high efficiency switching circuits.

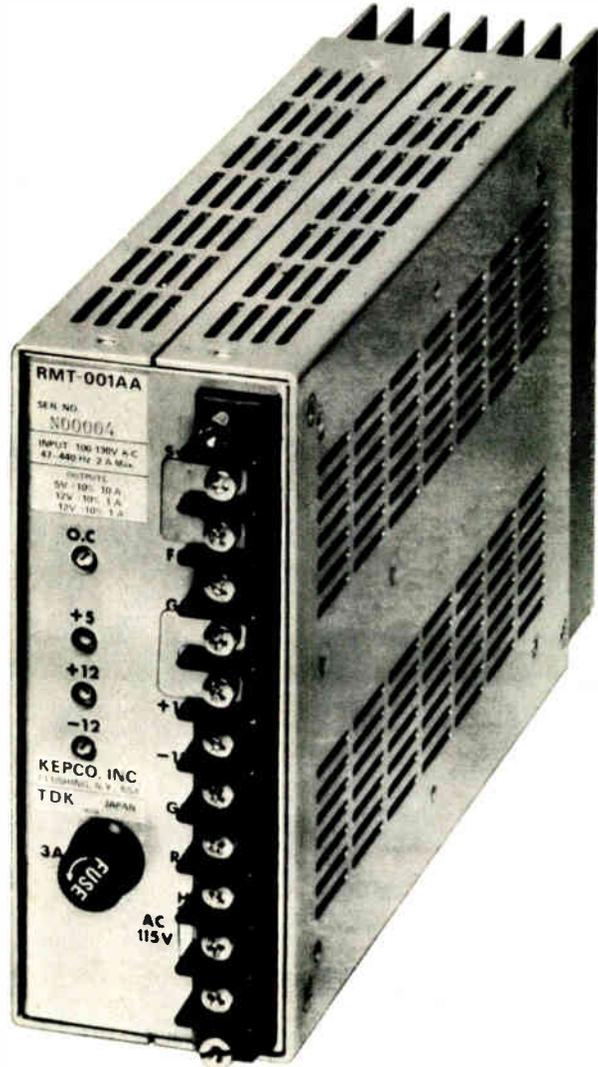

FEATURES

- Each output protected by overvoltage monitor.
- Each output protected by self-resetting overcurrent circuit.
- Soft start circuit reduces primary surge current.
- Remote on-off using logic level switching
- High density: more than 75 watts in less than 100 cu. in.

MODEL	OUTPUT #1		OUTPUT #2		OUTPUT #3		PRICE
	Volts	Amps	Volts	Amps	Volts	Amps	
RMT 001-AA	+5V	10 A	+12V	1 A	-12V	1 A	\$329.00
RMT 002-AA	+5V	10 A	+15V	1 A	-15V	1 A	329.00
RMT 003-AA	+5V	10 A	+12V	1 A	-5V	1 A	329.00
RMT 004-AA	+5V	10 A	+15V	1 A	-5V	1 A	329.00
RMT 005-AA	+5V	10 A	+12V	1 A	-9V	1 A	329.00

FOR YOUR MICROPROCESSOR

Custom volt-ampere combinations are available. Please consult the factory.


KEPCO® For complete specifications, write Dept. BTF- 14

KEPCO, INC. • 131-38 SANFORD AVENUE • FLUSHING, N.Y. 11352 U.S.A. • (212) 461-7000 • TWX # 710-582-2631 • Cable: KEPCOPOWER NEWYORK

Electronics/October 27, 1977

Circle 5 on reader service card

5

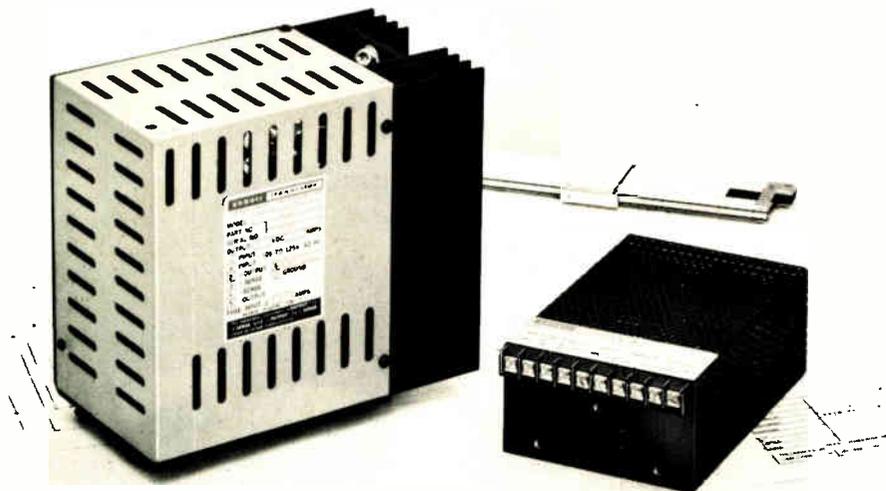

Reduce Your Power Supply Size and Weight By 70%

A new way has been found to substantially reduce power supply size and weight. Consider the large power supply shown at left in the above photo — it uses an input transformer, into a bridge rectifier, to convert 60 Hz to 5 volts DC at 5 amperes. This unit measures 6½" x 4" x 7½" and weighs 13 pounds. Abbott's new model Z5T10, shown at right, provides the same performance with 70% less weight and volume. It measures only 2¼" x 4" x 6" and weighs just 3 pounds.

This size reduction in the Model Z5T10 is primarily accomplished by eliminating the large input transformer and instead using high voltage, high efficiency, DC to DC conversion circuits. Abbott engineers have been able to control the output ripple to less than 0.02% RMS or 50 millivolts peak-to-peak

maximum. This design approach also allows the unit to operate from 100 to 132 Volts RMS and 47 to 440 Hertz. Close regulation of 0.15% and a typical temperature coefficient of 0.01% per degree Celsius are some of its many outstanding features. This new Model "Z" series is available in output voltages of 2.7 to 31 VDC in 12 days from receipt of order.

Abbott also manufactures 3,000 other models of power supplies with output voltages from 5 to 740 VDC and with output currents from 2 milliamps to 20 amps. They are all listed with prices in the new Abbott catalog with various inputs:

60 AC to DC
 400 AC to DC
 28 VDC to DC
 28 VDC to 400 AC
 12-28 VDC to 60 AC

Please see pages 1037-1056 Volume 1 of your 1975-76 EEM (ELECTRONIC ENGINEERS MASTER Catalog) or pages 612-620 Volume 2 of your 1975-76 GOLD BOOK for complete information on Abbott Modules.

Send for our new 60 page FREE catalog.

abbott transistor

LABORATORIES, INCORPORATED
 general offices eastern office

5200 W. Jefferson Blvd./Los Angeles 90016
 (213) 936-8185 Telex: 69-1398

1224 Anderson Ave./Fort Lee, N.J. 07024
 (201) 224-6900 Telex: 13-5332

6 Circle 6 on reader service card

Readers' comments

We have enough problems

To the Editor: Many persons, myself included, will not buy an electronically controlled car if we are given any reasonable alternative. First, we question the reliability of a complex electronic system in the harsh environment of a car, which makes a spaceship look by comparison like a baby buggy.

Second, considering the present difficulty of getting competent service, we doubt the ability of the automotive establishment to satisfactorily diagnose and repair such a system, even given elaborate monitoring facilities. Who, after all, will maintain this diagnostic equipment?

Finally, we foresee astronomical repair bills as service personnel frantically replace major assemblies to repair the myriads of subtle malfunctions not anticipated in the design of the automated test equipment.

Dale Hileman
 Sphygmatics Inc.
 Woodland Hills, Calif.

So do the cities

To the Editor: I would like to suggest an optional strategy for those municipalities that cannot afford the cost of increasingly sophisticated traffic radars designed to defeat radar detectors ["Highway radar eludes radar detectors," Sept. 15, p. 44]. If the radar is used in the departure mode (receding target), the radar detectors are totally defeated.

Daniel A. Langiani
 Gloucester, Mass.

Corrections

There were several minor errors in the schematic diagram of the selectable pulse time—dead time counter that appeared in the Oct. 13 issue ["Counter and switches select pulse-train length and dead time," p. 97].

The Q output, not the \bar{Q} output, of the 7472 flip-flop should be connected to G6, and pin 1 of the 7490 counters should be connected to pin 12, not pin 14. Also, the 7472 clock input should be driven by G5 and the J and K inputs connected to the 5-volt power source.


Investment Energy

What kind of power is needed to "seed" the energy sources of the future?

THE TECHNOLOGIES which offer the brightest promise of a major contribution to tomorrow's energy economy share a common need. In all cases, a large *investment* of energy is required, before a *return* on investment can be realized.


In most approaches, this investment is an integral part of the production cycle—creating the environment in which energy generation can occur. In others, it's needed to prepare the materials and components that go into the process. But in all cases, the investment is massive... and it must be delivered with exceptional precision and managed with exceptional sensitivity.

UVC has won a position of leadership in this demanding field—through long-term participation in the research, development and testing of advanced energy systems... and the provision of power for high-energy applications in such related areas as particle acceleration, high-voltage power distribution, and laser systems.

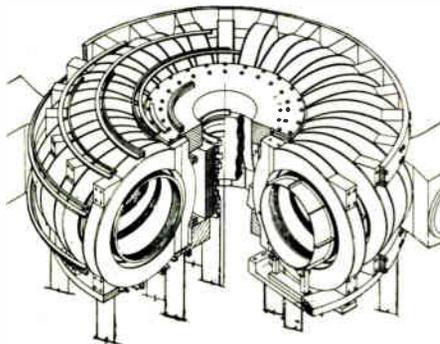

Basic structure of the tokamak device (ORMAK) at Oak Ridge.

While the "payout" on investment in some of the fields in which we're involved may be a decade or even a generation away, we know that these

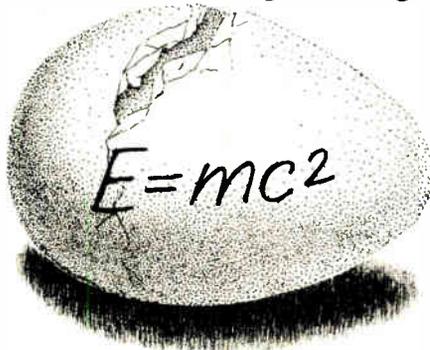

are ventures of historic importance, and deserving of our best talents and highest efforts.

Fusion Through Plasma Heating and Magnetic Confinement


Progress continues toward the goal of achieving controlled thermonuclear reactions by the heating of isotopes of hydrogen (available in limitless quantities in the world's oceans) to stellar temperatures. Methods of maintaining such astronomical temperatures for sufficient periods of time include various 'magnetic confinement' schemes. The most promising of these are being investigated with reactors of the so-called tokamak (ORMAK) designs.

UVC equipment is presently in use, powering the neutral injection systems for heating of such reactors, at the Oak Ridge National Laboratory, Princeton University, The University of California at Livermore and Berkeley, and at private corporations funded by ERDA. These units, supplying energy for particle acceleration and deceleration, include the largest, highest-power equipment ever delivered by UVC.

Fusion Through Laser Implosion

Another dramatic approach to controlled fusion involves the ignition of thermonuclear reactions by subjecting tiny pellets of hydrogen isotopes to intense bursts of laser light. UVC has developed a wide variety of power

supplies for laser fusion experiments... including work being done at the Livermore laboratories of the University of California, where an effort is under way to generate the most powerful pulses of light ever created by man.

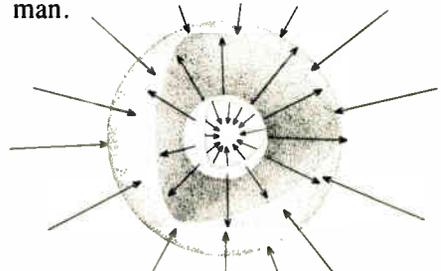

Laser implosion of a pellet.

Uranium Enrichment for Nuclear Power Generation

The 'enrichment' of uranium, by the separation of specific isotopes from the natural metal, is essential for the manufacture of the rods which fuel most types of nuclear fission reactors. Here, too, a laser application holds great promise for bringing new efficiency and economy to what has been an extremely costly and difficult process.


And here again, UVC power supplies are playing an important role in bringing this new technique to fruition.

What Can We Do For You?

Whether you're concerned with advanced energy systems or more conventional power problems, you too may profit from UVC's uncommon competence. If you'd like to discuss how we might add some Investment Energy to a project of your own, please call or write: Dept. E10.

Universal Voltronics Corp.
27 Radio Circle Drive
Mt. Kisco, New York 10549
(914) 241-1300

Get the scope you need—Now!

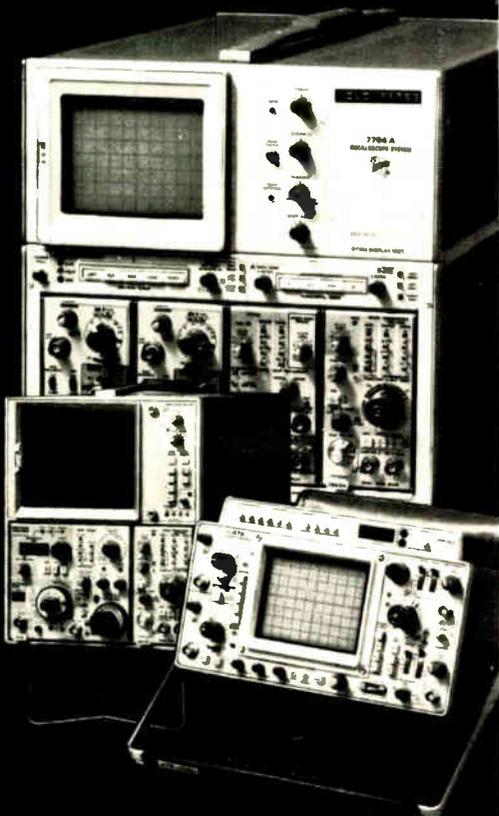

Our "Instrument Professionals" will tell you which scope will do the job best, at the lowest cost, make immediate delivery and guarantee performance.

Write or call for data on our other specialties: Instrument Leasing • Computer Peripherals • Equipment Sales • Instrument Service.

Circle 8 on reader service card

Call Continental Rentals

Get our FREE Catalog



Div. Continental Resources, Inc.
175 Middlesex Turnpike, Bedford,
MA 01730 (617) 275-0850

FOR IMMEDIATE RESPONSE CALL:
N.E. (617) 275-0850; L.I. (516) 752-1622;
NY, NJ (201) 654-6900;
Gtr. Phila. (609) 234-5100;
Wash., D.C. area (301) 948-4310;
Mid West (312) 439-4700;
So. Central (214) 690-1706;
Costa Mesa, CA (714) 540-6566;
L.A., CA (213) 638-0454;
Santa Clara, CA (408) 735-8300.

News update

■ Shipments of the large-scale digital computer built by National Semiconductor Corp. and marketed by Intel Corp. of San Francisco have been going on since the spring, and the deal between National and Intel is still in effect.

The computers are direct emulations of IBM's System 370/158, which run on IBM's own software [*Electronics*, Oct. 14, 1976, p. 29]. However, the National-Intel machine sells for half the price of the IBM 370/158, which can range upward from \$2 million. The emulation also claims for itself higher performance: a minimum of 25% more throughput. Intel's sales targets are the more-than-1,000 model 158s in place.

Bernard Cole

■ Control Data Corp. and Litton Industries Inc. have finally begun fabricating what are perhaps the largest displays ever built with their technologies—and the two are using different and competing technologies. The displays, which combine standard military paper maps and computer-generated tactical display data, are being built under the joint Tactical Display System project of the U.S. Army and the West German Ministry of Defense [*Electronics*, June 10, 1976, p. 25].


The displays are 1 meter by 1 meter. CDC's technique is to place a transparent one-color (orange-red) plasma panel over the maps; Litton puts the maps over a three-color (red, green, and amber) light-emitting-diode display and shines data through the maps, says Sid Littman, program manager at the Army Electronics Commands, Fort Monmouth, N. J. Litton had problems in getting enough light to shine through the map, while CDC experienced some trouble with its basic display technology, Littman says. However, he adds, "both firms have solved their technical problems. They are fabricating displays and it looks like they got what they want." Fabricated systems should be ready by next May or June, though initial delivery was scheduled for early 1978.

Bruce LeBoss

Gas Sensing Semiconductor

FIGARO TGS GAS SENSOR

quickly senses even small amount of gas.



Applications

1. Natural Gas-Leak Alarm
2. Propane Gas-Leak Alarm
3. Carbon Monoxide Detector
4. Automatic Fan Control
5. Fire Alarm (Detecting combustible gases contained in smoke)
6. Alcohol Detector (Detector for drunken driver)
7. Air Pollution Monitor

Please contact any of the addresses below directly for catalogs and price delivery information


FIGARO ENGINEERING INC.

● Head Office: 3-7-3 Higashitoyonaka, Toyonaka City, Osaka, 560, JAPAN TELEX 05286155 FIGARO J. CABLE FIGARO TOYONAKA TEL (06) 849-2156

● North America: 3303 Harbor Boulevard, Suite D-8, Costa Mesa, California 92626, U.S.A. TELEX 678396 CABLE FIGARENGIN COSTAMESA TEL (714) 751-4103

Circle 259 on reader service card

Our Strict Production Control System with Full Automation Guarantees Quality and Uniformity of Products. This is Our Everlasting Target.

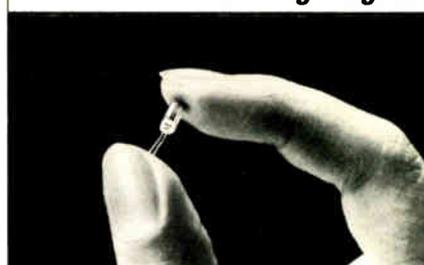

Miniature lamps: Sub-miniature lamps: Various base caps: All other parts for lamps: For further information and your problem settlement, contact us immediately

SAKATA MANUFACTURING CO., LTD.

14-12, 3-Chome, Hatanodai, Shinagawa-ku, Tokyo, 142, Japan
Cable Address: "SAKATABASE" TOKYO.
Tel: (03) 781-6078

Circle 260 on reader service card

World's fastest memory: Fujitsu's 7071/7072 1K ECL RAM delivers 10 ns maximum access time.

- Please send me data on the 7071/7072 1K ECL RAM
- Please send me the Fujitsu short-form product selector guide
- Please send me the Fujitsu IC Catalog
- Please call me to discuss an immediate application

Name _____ Title _____

Organization _____


Address _____

City _____ State _____

Zip _____ Telephone (_____) _____

Attention, next-generation system designers! You're going to need the fastest main-frame, scratch-pad, control and buffer memory you can get. And you can get it only from Fujitsu! It's our 1K ECL RAM—the 7071/7072.

The 7071/7072 is available immediately, in volume. It delivers 7.5 ns typical access time (10 ns max.) in the H version and 12 ns typical access time (15 ns max.) in the N version. Organized in 256 x 4 format, the new Fujitsu 1K ECL RAM is fully compatible with the 10K-series family. It can be configured as a 512 x 2 or a 1024 x 1 RAM, by using the unique block select inputs. For high-density applications, it offers 0-75°C oper-

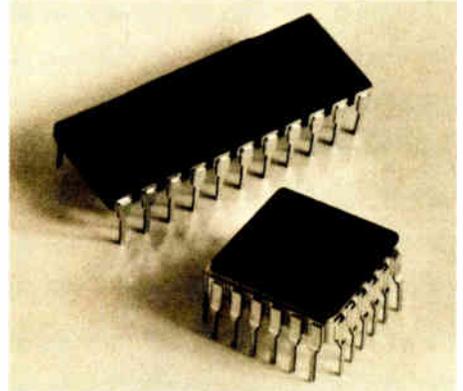

ating temperature range. Power dissipation is a low 0.8 mW/bit. The 7071 is offered in a 24-pin square package. Prefer a DIP?—the 7072 is our 22-pin model. These are the specifications and characteristics designers are asking for—and the rest of the memory world is trying to match.

Our state-of-the-art ECL process technology is at the heart of this remarkable RAM achievement. It enables us to deliver not just raw speed but consistent characteristics in any quantity you need. Plus demonstrated in-the-socket reliability. Reliability that's building loyalty among users who cannot afford to compromise their reputations.

You can't best Fujitsu when it comes to memory and memory-peripheral circuits. We deliver the broadest line by far: bipolar and MOS; size/price/performance for every application; specifications that never vary, no matter how many you need. For more details on the 7071/7072 and Fujitsu's complete memory IC product line, return the coupon or call us in Santa Clara, California for the name, address and telephone number of your local representative.


FUJITSU
AMERICA INC.

2945 Oakmead Village Court
Santa Clara, CA 95051
(408) 985-2300
Telex: 357402 • TWX: 910-338-0047

Circle 9 on reader service card 9

Rockwell introduces the R6500.

World Radio History

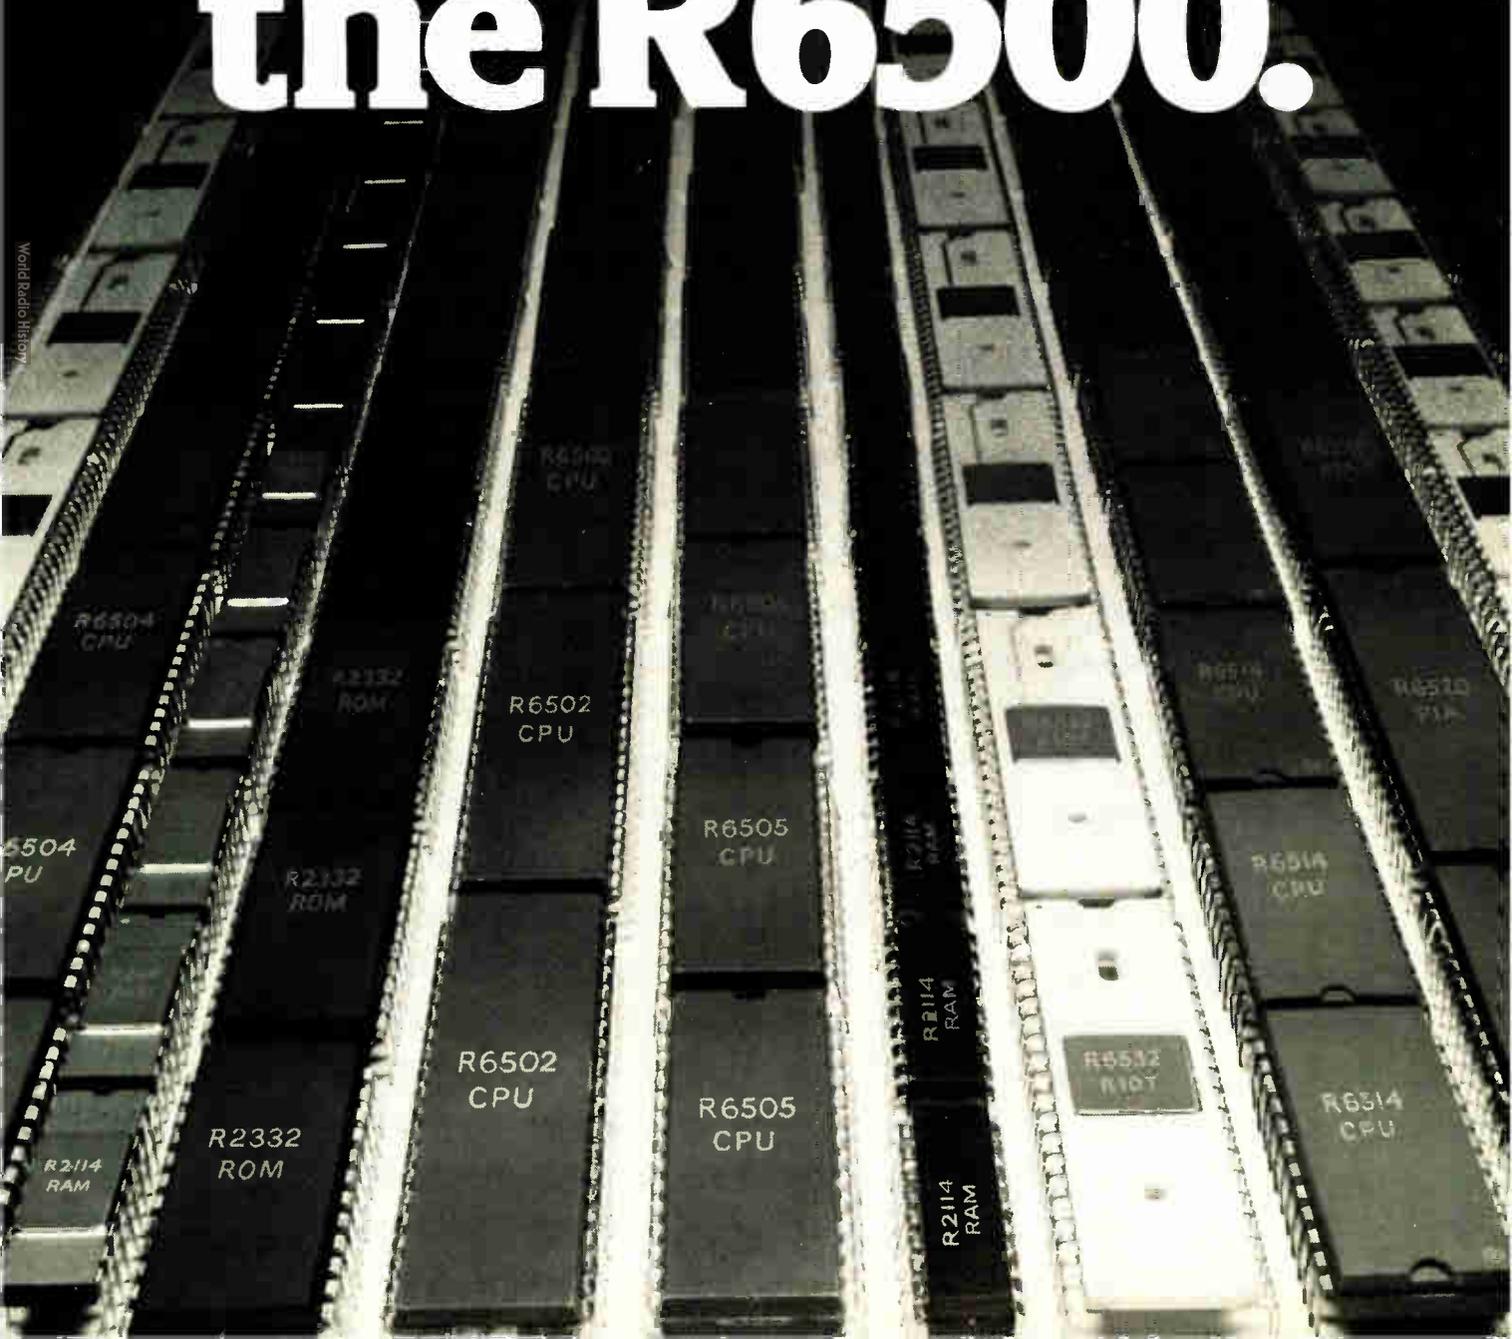

R6500: the third generation microprocessor system

Now you can move up to the proven 2 MHz performance of an NMOS 8-bit microprocessor, the R6500 from Rockwell.

Third-generation R6500 architecture and instructions with 13 powerful addressing modes make it easier for you to design more functions in, more cost out. And the R6500 is design-compatible with systems you may now be using.

R6500 economics are on your side

Smaller R6500 chips and single 5V power supply keep costs down as performance goes up. To get the right fit, choose from 10 software-compatible CPUs, eight versatile I/Os, ROMs, RAMs, and memory-I/O-timer circuits.

R6500 CPU Options

	40-Pin DIP		28-Pin DIP					
	R6502	R6512	R6503 R6513	R6504 R6514	R6505 R6515	R6506	R6507	
Memory Address Space	65K	65K	4K	8K	4K	4K	8K	
Interrupts - Maskable	Yes	Yes	Yes	Yes	Yes	Yes	No	
- Non-Maskable	Yes	Yes	Yes	No	No	No	No	
SYNC - Output indicates op code fetch cycle	Yes	Yes	No	No	No	No	No	
RDY - Single step and slow memory synchronization	Yes	Yes	No	No	Yes	No	Yes	
Φ_1 Clock Output	Yes	Yes	No	No	No	Yes	No	
DBE - Extended Data Bus Hold Time	No	Yes	No	No	No	No	No	

I/O Devices


PART #	NOMENCLATURE	DESCRIPTION
R6520	Peripheral Interface Adapter	2, 8-bit bidirectional I/O ports; 4 peripheral control/interrupt lines.
R6522	Versatile Interface Adapter	PIA functions plus 2, 16-bit programmable interval timers/counters.
R6530	ROM-RAM-I/O-Timer	1024 x 8 ROM, 64 x 8 static RAM; 2, 8-bit bidirectional data I/O ports; 2 programmable data direction registers; 8-bit interval timer.
R6532	RAM-I/O-Timer	128 x 8 RAM; 2, 8-bit bidirectional data ports; 2 programmable data direction registers; 8-bit interval timer.

PLUS ROMS, RAMS...AND MORE ON THE WAY

Rockwell adds solid development support

For fast and efficient system design, Rockwell offers SYSTEM 65—one of the smartest and lowest-cost, disk-operating, complete development systems available. It's equipped with two mini-floppies, resident two-pass assembler, text editor and monitor/debug package.

KIM-1, TIM, timeshare, complete documentation, plus extensive applications engineering are also available.

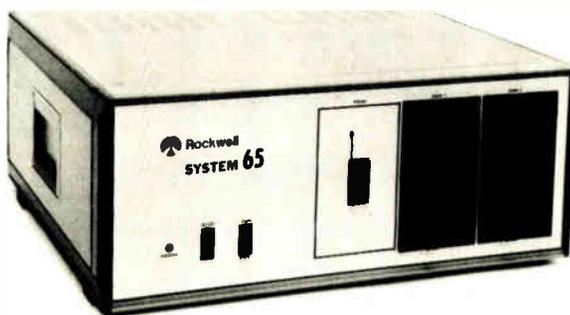

Rockwell is delivering in volume now

R6500 circuits are already being produced in quantity with Rockwell's N-channel, silicon-gate, depletion load process.

R6500 devices and SYSTEM 65 development microcomputers are now available at your local Hamilton-Avnet or Schweber distributor.

And new chips are in design. The first, a fully static 32K ROM, is now in production.

For your R6500 brochure write: D-727-F, Marketing Services, Microelectronic Devices, Rockwell International, P.O. Box 3669, Anaheim, CA 92803, U.S.A. or phone (714) 632-3729.



Rockwell International

...where science gets down to business

A little knowledge about computers can be expensive. A lot can be free.



1. The inside story on how our full **PRODUCT LINE** makes the difference to you.
Reader Service #140



2. How **Commercial ECLIPSE** Systems answer the diverse demands business makes today on a data system.
Reader Service #141



3. The secret of having computer power where your business needs it. Our book on **CS/40 SMALL BUSINESS SYSTEMS** tells.
Reader Service #142




4. Describes seven important **SUPPORT SERVICES** that get systems up and running, then keep them there.
Reader Service #145



5. Find out how our **Real-Time Disc Operating System SOFTWARE** can get you on-line fast, and keep you there.
Reader Service #146



6. **IT'S SMART BUSINESS** to know how our way of doing business benefits our customers.
Reader Service #148



7. How OEM's solve the dilemma of keeping their system costs down with our **NOVA 3 COMPUTER FAMILY**.
Reader Service #149



8. What you need to know about getting everything for a **DATA ACQUISITION and CONTROL** system from one place.
Reader Service #150



9. The last word in microprocessor-based **microNOVA** systems with full 16-bit **NOVA** architecture.
Reader Service #151



10. The amazing story behind our unique heuristic **MULTI-PROGRAMMING** operating system.

Reader Service #194



11. What to do when you need fast, fast access to **MASS STORAGE**.

Reader Service #195



12. **NOVA 3** systems, software and support let you customize a system to your application.

Reader Service #196



13. A wealth of information about how our computers are being used in actual **APPLICATIONS**.

Reader Service #197



14. Wonder what sets the benchmark for big performance computer systems? Wonder no more, it's **ECLIPSE S/230**.

Reader Service #198




15. Is there a sensible way to use computers in **DATA COMMUNICATIONS**? The message comes through clear.

Reader Service #199



16. What's the most you can expect to get from a mid-range mini today? What you get with an **ECLIPSE S/130** — the standard setter.

Reader Service #200



17. You want terminals that work the same way you do? You want the facts on our **DASHER TERMINALS**.

Reader Service #201



18. Our whole **SPARE PARTS** catalog. They're too important to be kept a mystery.

Reader Service #202



19. 1976 was a very good year. Our **ANNUAL REPORT** could be good for you.

Reader Service #203

Mail to: Data General, Westboro, MA 01581

Yes, I'd like to pick your brains. Please send me the brochures I have circled.

I'm in a hurry. Have your sales representative bring in the brochures I have circled.

Brochure numbers: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

Name _____ Title _____

Company _____

Address _____ Tel. _____

City _____ State _____ Zip _____

Data General, Westboro, MA 01581, (617) 366-8911. Data General (Canada) Ltd., Ontario. Data General, Europe, 15 Rue Le Sueur, Paris 75116, France, 50-006-06. Data General Australia, Melbourne (03)82-1361.


© Nova and ECLIPSE are registered trademarks of Data General Corp., 1977. DASHER is a trademark of Data General Corporation.

 **Data General**

It's smart business.

EX1027

© Data General Corporation, 1977

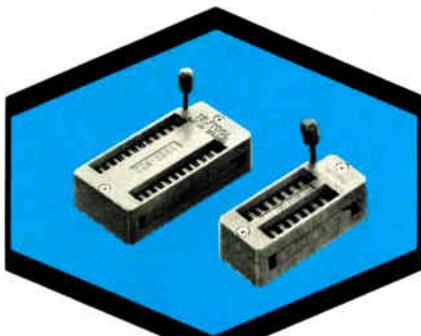

ZIP DIP® II SOCKET/RECEPTACLE SERIES

**IMPROVED TEXTOOL SERIES
INCREASES VERSATILITY
AT COMPETITIVE PRICES**

The ZIP DIP II socket/receptacle series offers all the advantages of TEXTOOL's original zero insertion dual-in-line package models plus increased socket versatility and reduced receptacle pricing.

The ZIP DIP II socket features an enlarged entry for use with an even wider range of devices and a flat top plate for easier entry and extraction. Contacts are on even 100 mil spacing (300-400-600 mil) for more convenient mounting on standard hardware.

A built-in "stop" insures that the ZIP DIP II handle can't be easily over-stressed. Top mounted assembly screws facilitate the replacement of damaged or worn internal parts. TEXTOOL has strengthened both hardware and plastic for increased reliability and screw mounting of the socket to the ZIP DIP II receptacle makes possible a more positive locking system.



The ZIP DIP II receptacle (left) has all the features of previous ZIP DIP receptacles, yet at a lower price. It virtually eliminates mechanical rejects, is a disposable plug-in unit requiring no soldering and has a typical life of 25,000-50,000 insertions. The receptacle is ideal for high volume hand testing and, since replacement time is eliminated, a test station can process literally millions of devices before it must be replaced.

Detailed information on these and other products from TEXTOOL . . . IC, MSI and LSI sockets and carriers, power semiconductor test sockets, and custom versions . . . is available from your nearest TEXTOOL sales representative or the factory direct.



PRODUCTS, INC.

1410 W. Pioneer Drive • Irving, Texas 75061
214/259-2676

People

Nobel winner Anderson awaits practical uses for advances

"It's very hard to fight an existing technology that's doing the job," says Philip W. Anderson, consulting director at Bell Laboratories's Physical Research Division in Murray Hill, N. J., and cowinner of the 1977 Nobel Prize in Physics awarded by the Royal Swedish Academy of Sciences. Cited for his contributions during the late fifties and early sixties to the understanding of localized magnetism in metals and the formulation of the idea of localization in disordered materials, Anderson helped lay the groundwork for the magnetic-bubble and Josephson-junction (superconducting) technologies in the first instance, and amorphous semiconductors in the second.

Amorphous devices are now being applied in computer memories and as photoelectric light-sensing elements, while magnetic bubbles and Josephson devices may play roles as storage memories in telephone and computer equipment. But the mild-mannered, 53-year-old theorist, is careful in predicting other applications. "A new technology has to have enormous advantage in the face of the cost of the engineering development needed to build it up," he says.

Door opener. It will not be easy for anything to replace existing silicon-semiconductor technology because, as he points out, "all the engineering development has been done. However, if present semiconductor technology fails to do the job, then the door is open for a new technology, like amorphous semiconductors, just as vacuum-tube technology failed in computers and opened the way for transistors."

One suggested use for glassy-like amorphous devices, which should be cheaper to manufacture than crystalline silicon, has been in solar-energy converters. Anderson, who is part-time physics professor at Princeton University, cautions that though advantages may be there, practical realization is not.

His work at present is still in the theoretical realm, delving into amor-



Winner. New technology will find a place if the old fails to do its job, Anderson says.


phous semiconductors and random magnetic alloys. He does express faith in at least a couple of the new technologies, saying he has "great hopes for Josephson technology as it applies to high speed computers and their use in the communications field." Likewise, he expects good things from magnetic garnet bubble-memory devices.

Ferris wants to assess impact of FCC policy

One of Charles D. Ferris' first priorities when he took over as chairman of the Federal Communications Commission on Oct. 17 was to upgrade the Office of Plans and Policy. He wants that office to make the FCC able "to forecast trends, rather than react to them" and to let the commission "assess the impact of its decisions, rather than being told about the impact by others."

If Ferris can achieve that, it will be more than his predecessors could do. Since being set up in 1971, the office has by and large been ineffectual, for lack of authority to acquire data from the FCC's other bureaus. Should Ferris change its role and image, his success will mark him as an accomplished politician.

The political skills and connections of the new FCC chairman have already attracted notice. For example, before his most recent job as general counsel to House Speaker Thomas P. O'Neill Jr., Ferris served 12 years on the Senate Democratic Policy Committee, where he rose to

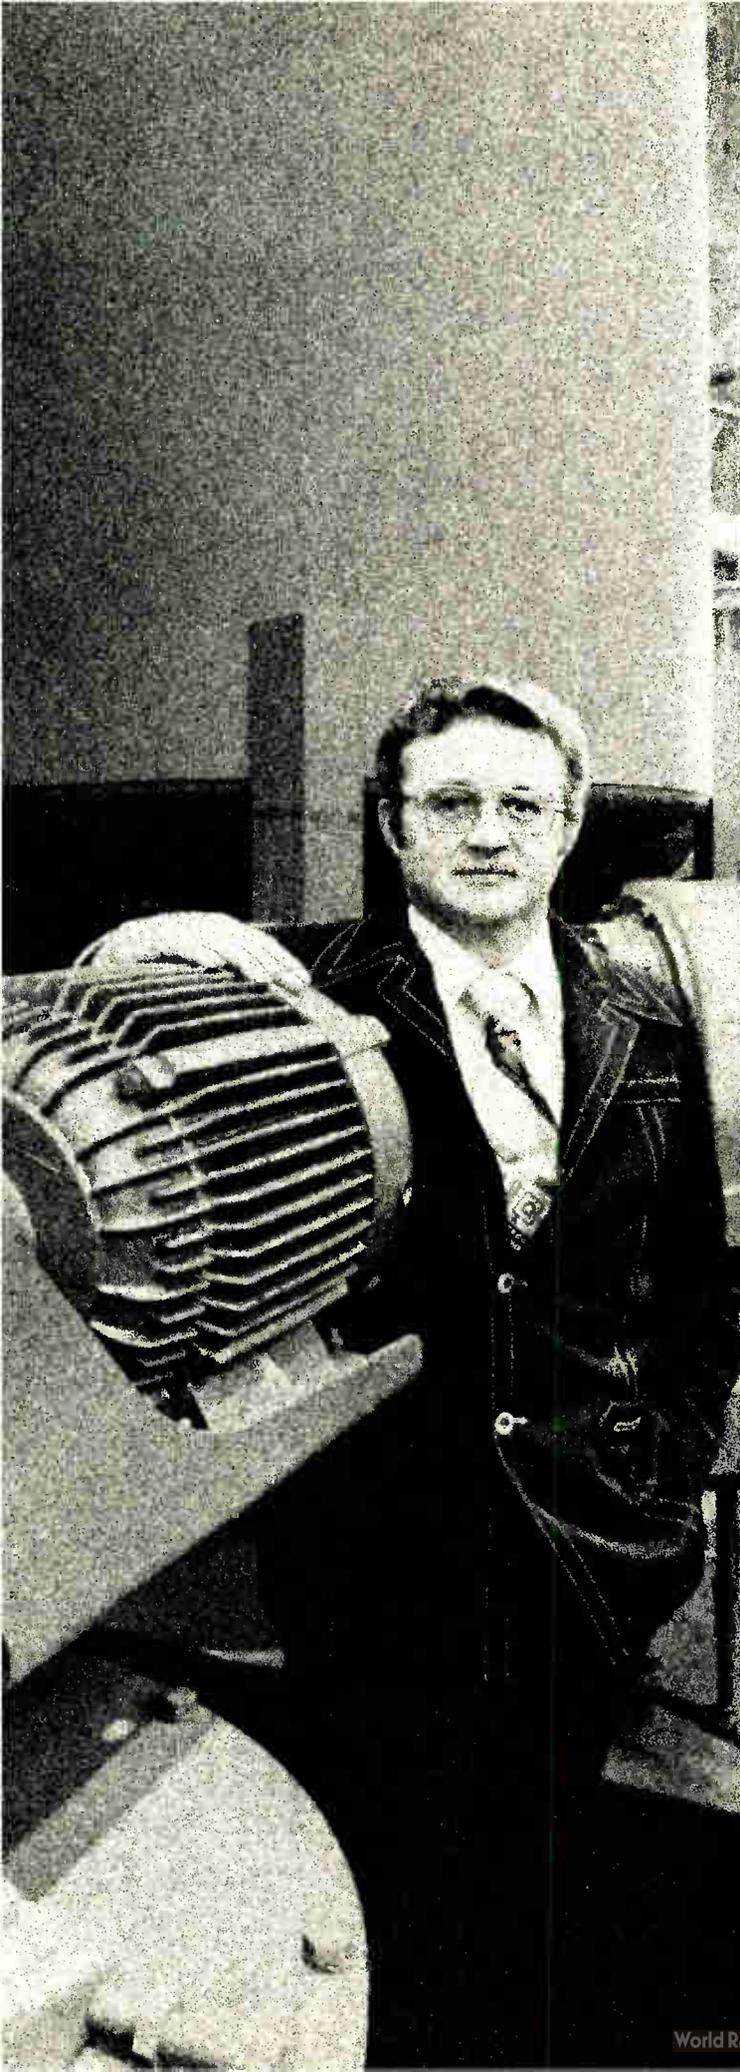

"Kodak helped us set up a reprographics program that could save us more than \$100,000 a year."

**Dennis Thurgood,
Document Control Manager,
EIMCO PMD Division,
Envirotech Corporation,
Salt Lake City.**

"EIMCO PMD is a leading manufacturer of pollution control equipment. Since much of this equipment has custom engineered features, we generate more than 2,000 drawings a month.

"We started working with Kodak back in 1973, expanding our microfilm capabilities. Most recently, we set up a reprographics center with a Kodak Startech processor. Doing the photoreproduction work internally has resulted in substantial dollar savings.

"Also, we have increased the individual drafter's capacity. Before, he was doing a basic pencil-to-paper operation. Now he comes to us and says, 'I need to get from here to here, can you help me?' And we can. Scissors drafting, opaquing, second originals via blowbacks from microfilm are all part of our capabilities. Making the drafter more efficient is probably the major justification for the installation.


"And it's certainly paying its way. We figure we'll save more than \$100,000 a year for the next five years. We've reduced cost by doing photoreproduction work internally; saved drafting time through reprographic techniques; and we've gotten our files under control with microfilm."

Reprographics can help you, too.


Send for more details about EIMCO'S use of reprographic techniques, plus a complete listing of Kodak products and other applications. Write: Eastman Kodak Company, Graphics Markets Division, Dept. R4805, Rochester, N.Y. 14650.

**VERSATILITY IN
REPROGRAPHICS**



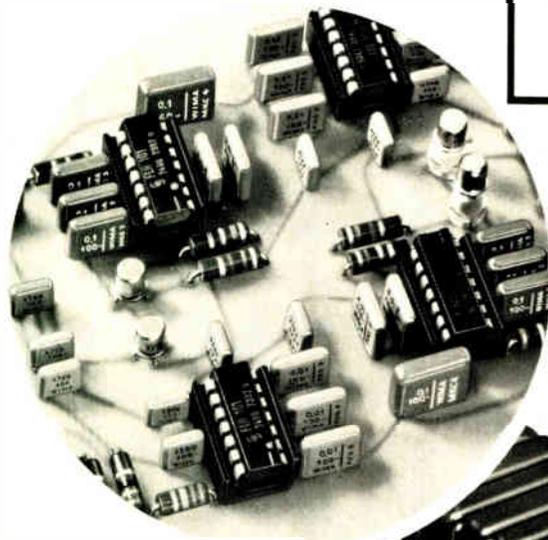

IC's
require
small
C's

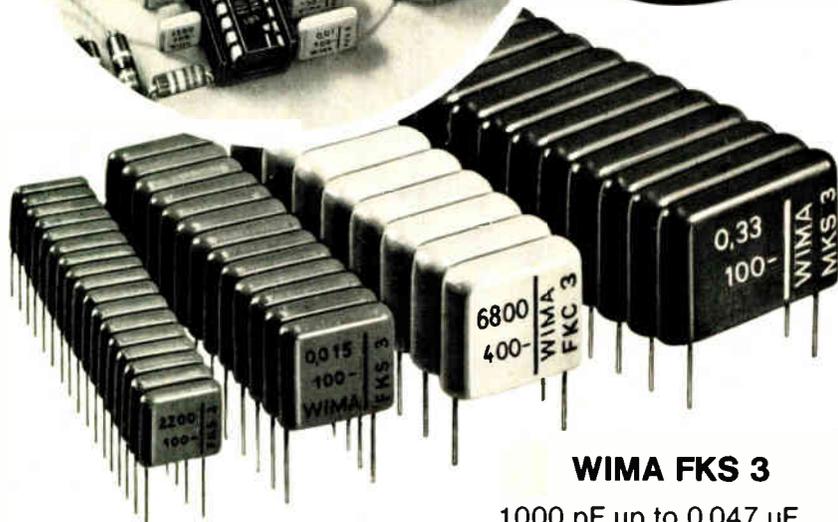

WIMA FKS 3

1000 pF up to 0.047 μ F

WIMA FKC 3

100 pF and up

WIMA MKS 3

Up to 0.47 μ F

WIMA FKS 2 min

P.C.M. 5 mm
1000 pF to 0.047 μ F

Cast-moulded capacitors

are an excellent aid in designing your IC-equipped printed boards. Use the new plug-in WIMA® capacitors which are smaller and have regular dimensions.

Write for our new catalogue.



WILHELM WESTERMANN

Spezialvertrieb Elektronischer Bauelemente
D-68 Mannheim 1
Fed. Rep. of Germany
Augusta-Anlage 56
P. O. Box 2345
Tel.: (0621) 40 80 12



New head. FCC chairman Charles Ferris seeks to upgrade Office of Plans and Policy.

the post of chief counsel.

"The FCC is going to need a well-connected politician next year when Congress takes up the Bell bill," notes one industry lobbyist. Formally titled the Consumer Communications Reform Act, the controversial Bell bill—so called because of its strong support by American Telephone & Telegraph Co.—will attempt to rewrite and update the 1934 Communications Act that set up the FCC.

Ferris displayed one sign of his political savvy by carefully avoiding any prejudgment of the pending legislation. Calling competition and related telecommunications issues "the biggest challenge facing me," the 44-year-old lawyer cautiously observes, "the law prohibits my favoring competition just for competition, equally as it would rule out monopoly just to preserve monopoly. The goal must be what course best serves the public."

The new chairman began his career as a research physicist for Sperry Gyroscope at Great Neck, N. Y., in 1954 after receiving a BS from Boston College. But he returned there in 1961 to take a law degree, going on later to Harvard University's Advanced Management Program at the Graduate School of Business.

Ferris professes strong advocacy of government in the sunshine and says he will run "an open commission. . . . I want the public to know who I meet with and what I meet with them about."

SSR UPDATE


Our International Connection

The European market demanded a high voltage AC solid state relay with a challenging combination of performance features such as:

- 3750VRMS optical input/output isolation to meet VDE and IEC specs
- 800 volts peak blocking voltage for high overvoltage transient immunity
- 480VRMS output voltage rating for reliable 3-phase switching
- 200V/ μ sec min. off-state dv/dt rating
- Steady state load current ratings up to 40 Amps

We met that challenge with our all-new 621 Series. Fact is, Teledyne designed it from the ground up to achieve all of the above—from pc board layout with wide tracking distances for high voltage isolation to a highly functional case configuration with deep recessed terminals. Other features include logic compatible input drive circuitry, and zero voltage turn-on to reduce EMI.

For complete specification data, contact your local Teledyne Relays sales office. You'll find we have the experience, products, and technical support to meet all your SSR needs.

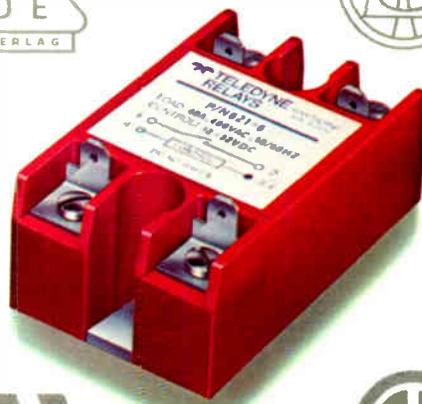

OTHER TELEDYNE AC SSRs

- A. 601 Series***
5 and 10A (to 600V peak). Optically isolated, zero voltage turn-on. Screw terminals, quick disconnects, and pcb pin options.
- B. 611 Series***
10, 15, 25 and 40A (to 600V peak). Optically isolated, zero voltage turn-on. Dual purpose screw/quick disconnect terminals.
- C. 675 Series***
Low profile (0.5" max.) pc board SSRs. Output rating 3A, up to 600V peak. Optically isolated, zero voltage turn-on.
- D. 671 Series**
I/O Converter Modules. Special purpose SSRs for use in programmable controllers, machine tool controls, etc. Mounting panel available.
- E. SerenDIP® Series***
TO-116 DIP package. Output rating 1A/280VRMS. Logic compatible 3.8 to 10VDC input.
- F. 970 Series MOVs**
High voltage transient suppressors designed specifically for use with all Teledyne AC SSRs.

*UL recognized/CSA certified.


TELEDYNE RELAYS

3155 West El Segundo Boulevard, Hawthorne, California 90250
Telephone (213) 973-4545

People around the world use
AMP multi-national
connectors.

We speak their language.



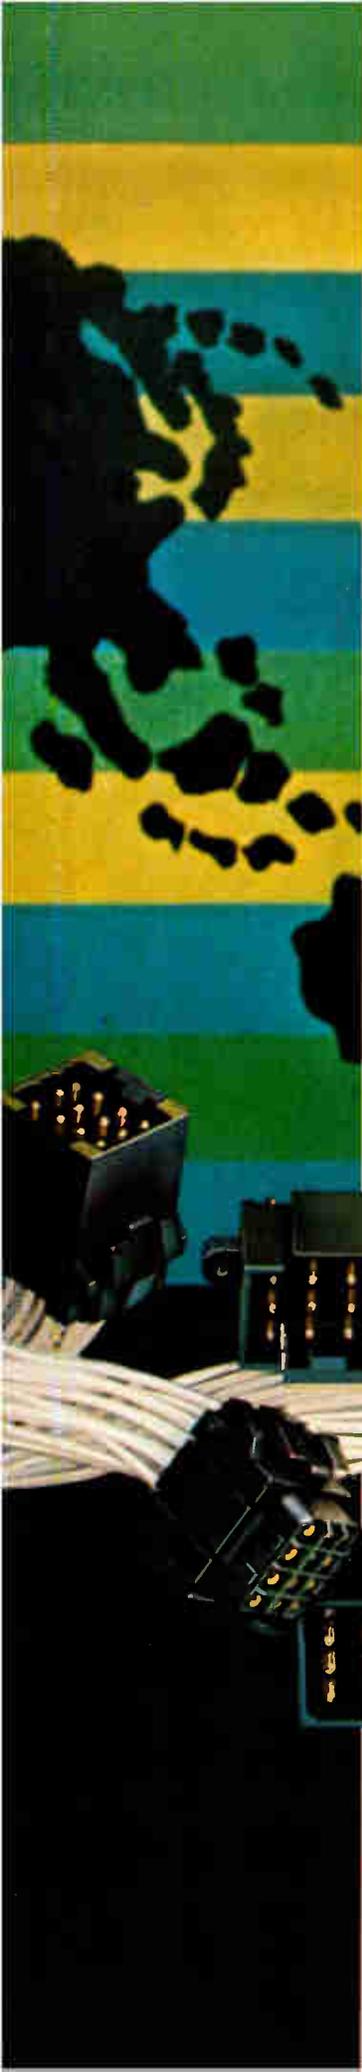

And we speak it in many ways. Our entire MI Series Connector line, for example, is designed to true metric dimensions. And that includes everything from contact centers to housing dimensions.

In addition, the MI Series meets the general requirements of national and international testing and approval groups—ranging from UL and IEC to CSA and VDE.

Even more important, wherever you may use MI connectors, in New York or Sydney, you can depend on first-rate AMP technical service. Because AMP has long been a worldwide corporation with major factories and engineering facilities in the leading countries. And that means true in-depth support at home and abroad. Plus practical first hand advice on international technical requirements when you need it.

Even without international technical aid, AMP MI Series Connectors are economical. Because they are part of AMP's exclusive Multimate Family. That means you can use common contacts with a variety of connector families and save on both tooling and inventory.

So if your product plans are international in nature, be sure to get complete information on AMP MI Series Connectors. Just call Customer Service (717) 564-0100. Or write AMP Incorporated, Harrisburg, PA 17105.

AMP has a better way.

AMP
INCORPORATED

Circle 19 on reader service card

AMP is a trademark of AMP Incorporated


World Radio History

MOSTEK 3870 SINGLE

The solution to low-cost

Cost advantages increase potential applications.

Mostek's new single-chip 3870 microcomputer is the answer to maximum cost effectiveness in a wide range of control and logic replacement applications. Most obvious advantages are software flexibility, fewer components, low power and a 40-pin plastic package. The device now makes it economically feasible to replace as few as 12 TTL packages in an existing system while increasing capability. And the 3870 pinout allows applications to be implemented on single-sided PC boards, further reducing system costs.

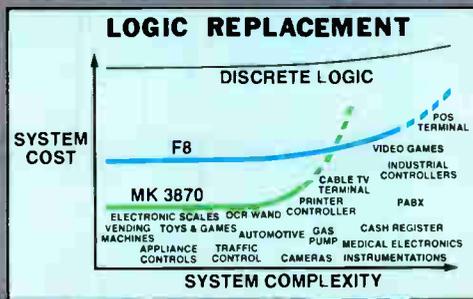

Full-capability on one chip.

The 3870 is the first single-chip microcomputer offering full compatibility with a multi-chip processor family. The device can execute the complete F8 instruction

set of more than 70 commands, providing complete software compatibility with the entire F8 multi-chip family. Features include 2K multi-chip program storage, 2K other single-chip devices - 2048 bytes of ROM, 64 bytes of scratchpad RAM, four 8-bit I/O ports and a single +5 volt power supply requirement. If more memory (RAM, ROM or PROM) or I/O is eventually required, the system can be simply upgraded to the expandable MK 3850 (F8 CPU).

Low-cost, development tools.

Development represents a significant investment in your program. Mostek offers one low cost

Under


Variable single phase 4 MHz oscillator

2Kx8 mask programmable ROM

Software compatible with existing F8 family

64x8 scratchpad RAM


32 bits (4 ports) bidirectional TTL compatible I/O

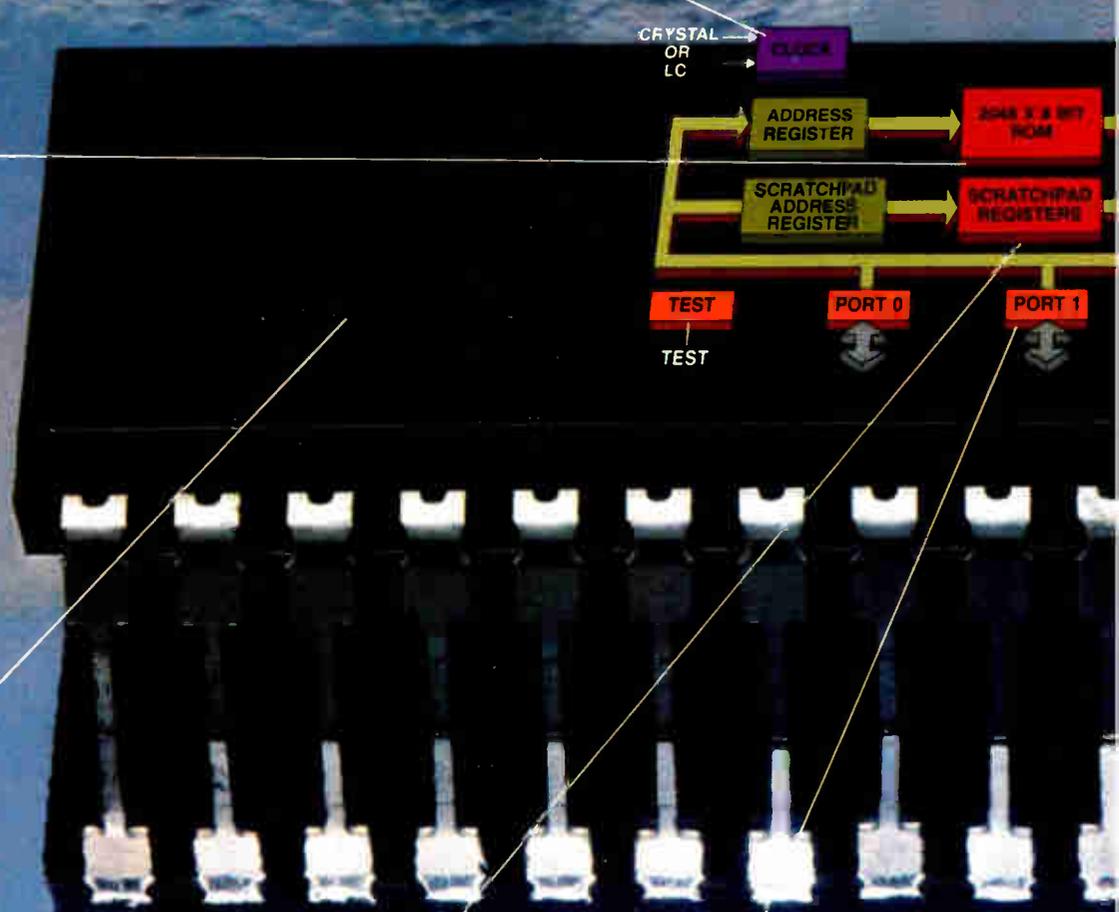

CHIP MICROCOMPUTER. logic replacement.

Module (AIM-70), and an Emulator (EMU-70) for PROM prototyping. With completion of software development and debugging, your 3870 prototype may be emulated for field-testing and evaluation with the compact PROM-based EMU-70. This allows exact verification of code prior to committing to mask programmed MK 3870's.

From low-cost application development to low-cost delivery, your Mostek representative or distributor

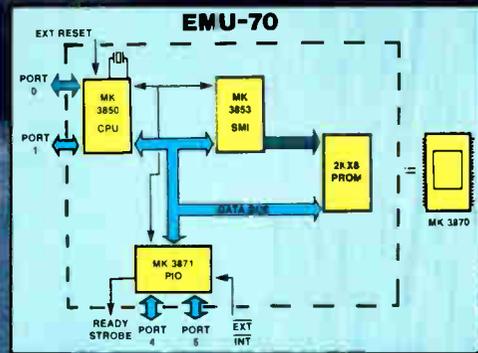

has all the answers. Call or write today for a free brochure describing the versatile 3870 single-chip microcomputer.


MOSTEK

1215 West Cypress Road, Carrollton, Texas 75006 (214) 242-6444
 In Europe contact: MOSTEK GmbH, Telephone: (0711) 701008

MOSTEK ASIA
 Telex: 85148 MKA HX

\$10.00*

Modulo "N" binary readable timer

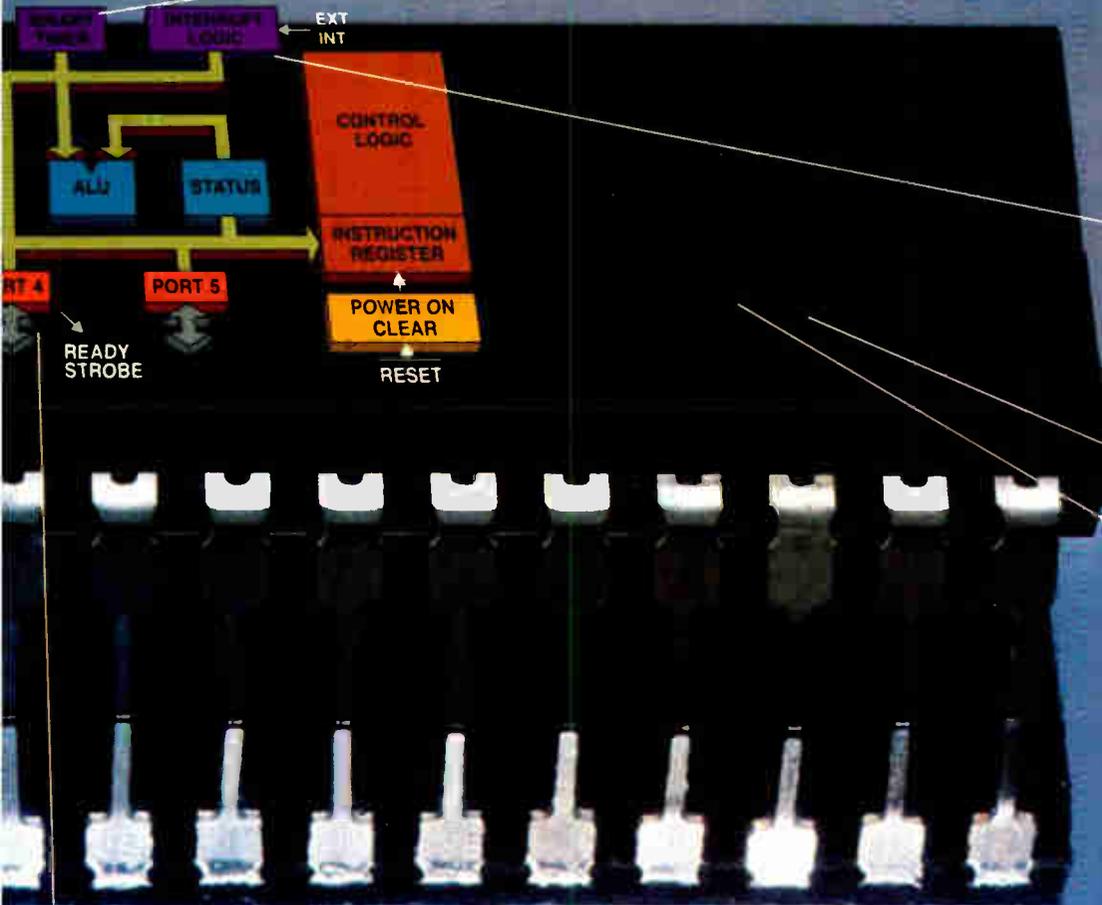

Four modes of vectored interrupts

Low Power (typ 300mW)

Single +5 volt $\pm 10\%$ power supply

Ready strobe provides handshake capability with port 4

*1000 piece quantities, 40-pin plastic package


Intel delivers the 2147. memory technology

Imagine a 4K fully static RAM that runs at bipolar speed yet cuts power consumption dramatically, all in a standard 300-mil wide 18-pin DIP.

That's the new 2147. It's a product of a new High-performance MOS technology we call HMOS. The 2147 is in production and we're delivering it now. HMOS makes it a new industry standard in high speed, high density memory. It's sure to change the way you design high performance memory systems.

In fact, the larger the cache, main or add-on memory your design needs, the lower the power consumption per bit with the 2147. A unique new power-down mode makes that power reduction possible. When the 2147 is deselected it stands by at a typical power dissipation of 50 mW — less than 15 microwatts per bit. So you can achieve major savings in cooling and power supplies, in systems large or small.

Access times range from 55 to 70 ns maximum with identical cycle times. Typical operating power dissipation is 500 mW, with

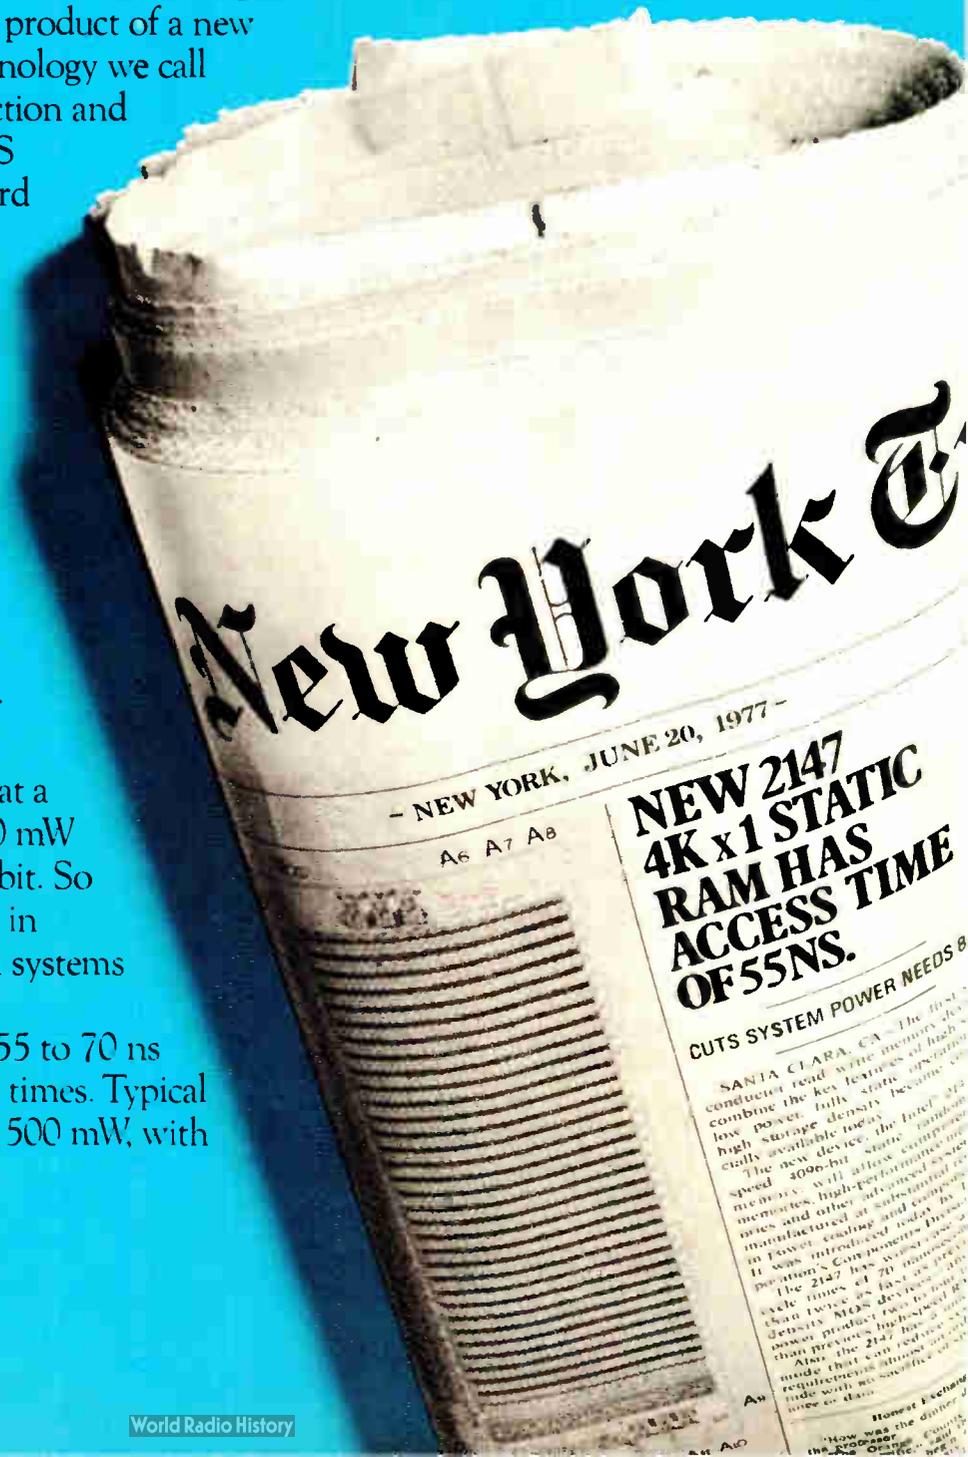

It's HMOS, the new that scoops bipolar.

worst case specs not much higher.

Throughput is always high because the 2147 can respond to select inputs as fast as to address inputs. HMOS eliminates the power-up delays of conventional power-down techniques.


On top of this the 2147 is fully static, eliminating the complications of conventional high density RAMs, such as clocking, address set-up or hold times. The 2147 operates on a single +5V supply and is directly TTL compatible. It uses the industry standard pin-out for 4K x 1 static RAMs. The chip itself measures only 158 mils square.

Now Intel has an expanded family of HMOS 1K and 4K high performance static RAMs: the recently introduced 2115A/2125A and now the 2147. Check 2115A/2125A and 2147 performance specs at right.

Order 2147's, 2115A's and 2125A's from your local Intel distributor. Contact: Almac/Stroum, Component Specialties, Cramer, Hamilton/Avnet, Harvey Electronics, Industrial Components, Pioneer, Sheridan, L.A. Varah, Wyle Liberty/Elmar or Zentronics.

For more information write: Intel Corporation, 3065 Bowers Avenue, Santa Clara, California 95051. In Europe: Intel International Corp. S.A., Rue du Moulin à Papier, 51-Boite 1, B-1160, Brussels, Belgium. Telex 24814. In Japan: Intel Japan Corp., Flower Hill-Shinmachi East Bldg. 1-23-9, Shinmachi, Setagaya-Ku, Tokyo 154.

intel delivers.

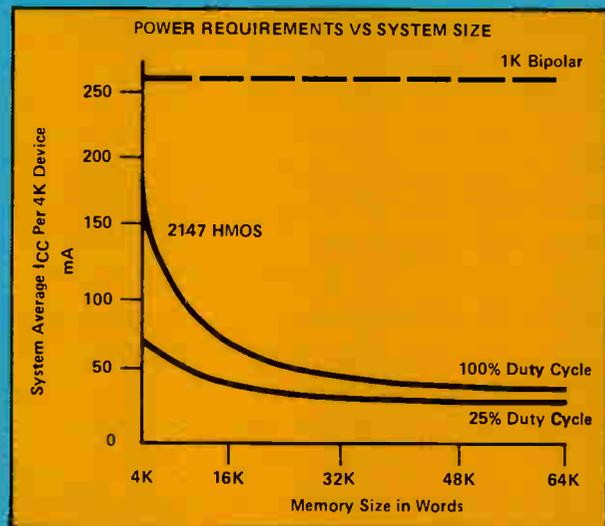

	Density	Current (mA)				Access Time (ns)
		Active		Standby		
		Typ.	Max.	Typ.	Max.	
2147	4K	100	160	10	20	70
2147-3	4K	120	180	15	30	55
2115A/25A	1K	100	125	N/A		45
2115AL/25AL	1K	60	75	N/A		45

Engineering employment: rerun?

There is increasing evidence that a boom is in the making in engineering employment. The classified pages are bursting with recruitment ads, and at recent technical conferences the headhunters were aggressively evident. The Technical Demand Index, a barometer of the demand for technical personnel in all disciplines compiled by Deutsch, Shea and Evans, a New York recruiting firm, is at an 11-year high, exhibiting an 80% rise since a year ago. While no one is as yet willing to project a serious shortage of engineers, the competition for available people is unquestionably high. As one president of a high-technology company recently put it, "the next big problem in electronics is not in technology but in human resources."

The return of boom times for engineers should stir a strong feeling of *déjà vu* in those of us who have been through this before. And it should also stimulate feelings of alarm and caution as industry tries to meet the upcoming human resources problem in high-technology areas, without repeating some of the past mistakes.

Let's just run through a reel or two from the old movie. In the good old days, there were boom times. Then, unexpectedly, an economic slowdown hit. Companies retrenched and laid off engineers. To the surprise of everyone, the slowdown worsened and lasted long enough to be called a recession. Companies retrenched even more and laid off even more engineers. Meanwhile, back at the engineering schools, great numbers of students, drawn into engineering by continuing predictions


of continuing boom times, waited to enter the job market. Reel two, of course, shows the disillusionment and sobering readjustment forced on the too many who could not land or hold on to the too few jobs.

The engineering profession has just been through a good part of reel two and now it looks as if the movie is about to start over. But it's not too late to write a new scenario.

Just a year ago on this page we pointed out: "For some time it has been apparent that the nation's engineering schools are turning out more EES than industry, Government, and academia can absorb. Incredibly, despite studies by engineering societies and warnings from a host of other informed groups, there is no evidence that steps are being taken to make sure that young people entering an engineering career path are presented with a realistic picture of their prospects for jobs after their training is completed."

Now, as companies turn once more to the engineering schools to fill the depleted pipelines, it is their responsibility as well as the schools' to present a realistic picture of career prospects and industry needs. They should work closely together to ensure that not only will industry's short-term needs be met adequately but that in the long term the baleful effects of oversupply will be avoided.

It may be that, given the dynamics of the free-wheeling electronics industries, it will never be possible to damp down the supply and demand oscillations completely. But it is essential that everyone try.

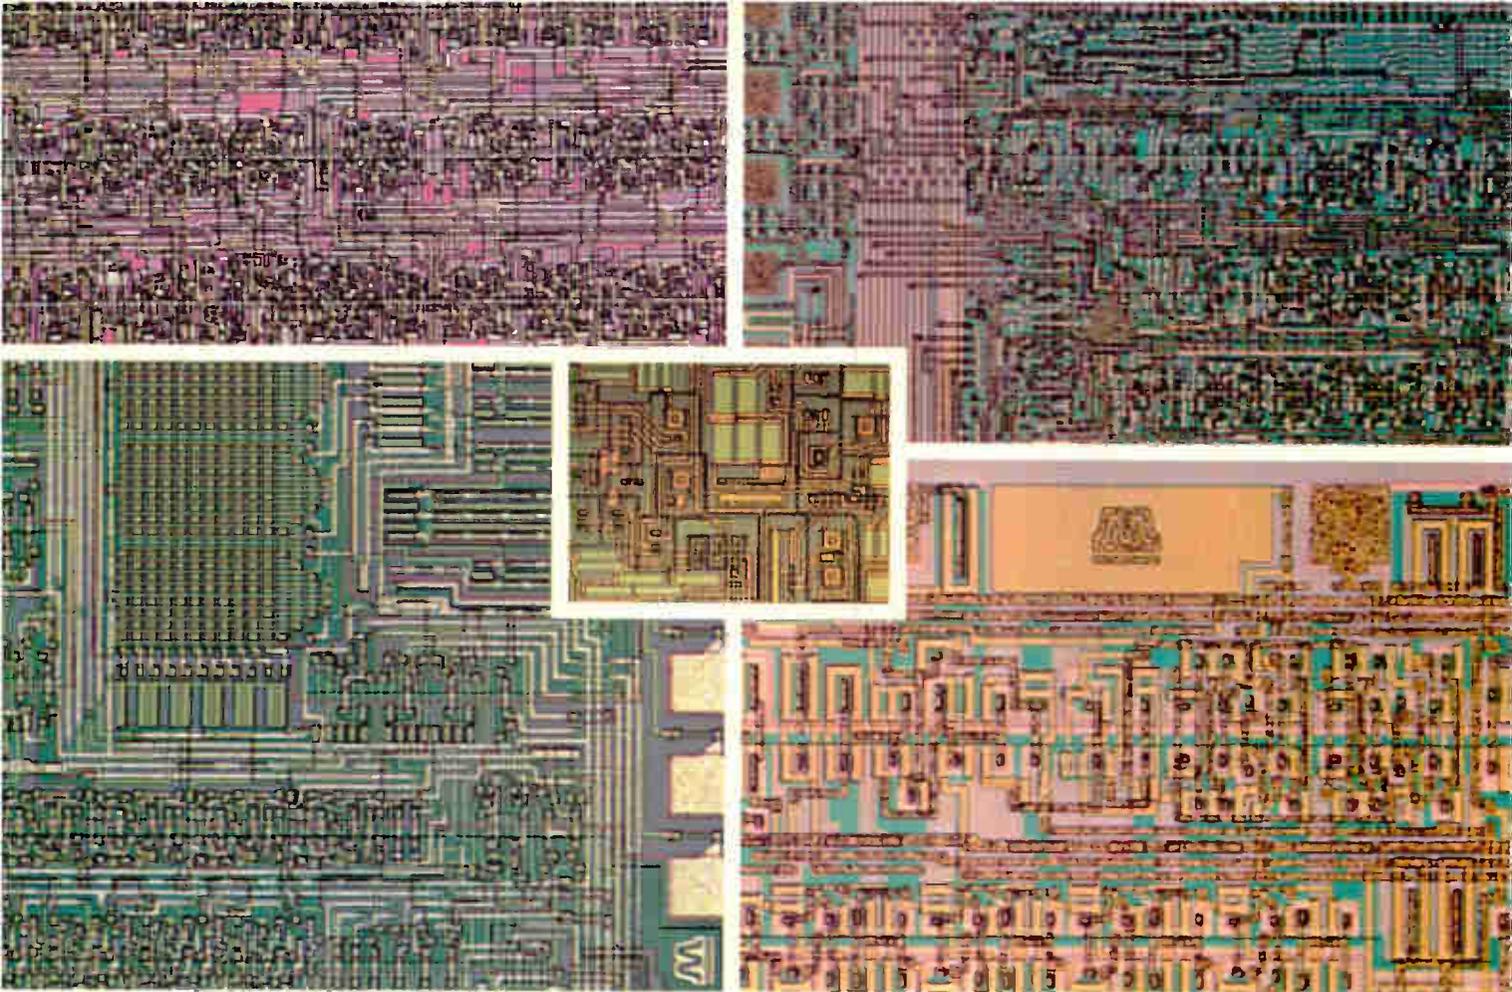

Five success stories: Each of these proprietary LSI circuits made one of our customer's new products perform better and cost less.

That's our business. Making our customers' products better by applying the advanced technologies of large-scale integration. We've done it hundreds of times, in a wide and growing spectrum of product applications.

Take, for example, the multimeter circuit we designed for an instrument manufacturer. By miniaturizing functions in the circuit, we made the product more portable and more reliable. We also saved the customer a good deal of money in assembly labor—enough to amortize his development costs within a year.


Or consider the pair of ICs we developed for a CB radio manufacturer. One of the devices, a Bipolar AM Receiver, handles all functions between antenna and audio. The other chip, a CMOS digital frequency synthesizer, includes a pre-scaler, a PLL and VCO. Providing over 80% of the electronics required to produce a CB transceiver, this chip set is just one example of how we can combine

both digital and linear processes to tailor a cost-efficient system solution.

And we are as reliable as you can get when it comes to *making* custom LSI circuits. Our proven production processes—HD/CMOS, Bipolar and the deposition of thin-film resistors on LSI chips—consistently produce high yields.

Exceptional noise immunity and high switching speeds are standard performance features—especially in our HD/CMOS circuits. And because they consume less power than microprocessor- or IC-based systems, our devices operate on comparatively smaller, less-expensive power supplies.

If your potential application requires more than a handful of standard ICs and discrete components, you ought to think about the advantages of converting to custom LSI. Contact us today and we'll help you write your own success story.

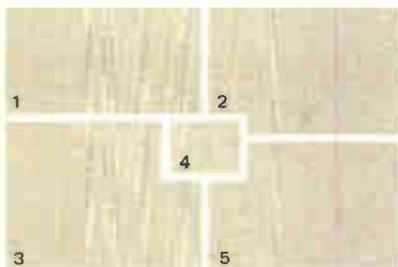

KEY: 1. DVM Circuit, 3½ digit, A/D converter; 2. LCD Watch Circuit, 6-digit, 6-function; 3. CB Scanner with ROM; 4. Cardiac Pacemaker; 5. PLL Frequency Synthesizer.



We sell more than circuits. We sell solutions.

3100 Alfred Street, Santa Clara, CA 95050, (408) 247-5350

World Radio History

Circle 25 on reader service card

The most LOGIC·al ANALYZER



\$599.95

Our Model 100A/10 gives you more features per dollar ... that's why EDN selected it as a top product for 1977*

FEATURE	MODEL 100A/10	HP-1607
Trigger Word	24 bits	16 bits
Data Displayed	3 bytes by 16 words deep (1 byte x 16 at any one time)	2 bytes by 16 words deep
Data Collection	Pre- and post-trigger	Pre- and post-trigger
Display Mode	Single/Repeat	Single/Repeat
Display Format	HEX/OCTAL	HEX/OCTAL
Qualifiers	2 (both trigger word & clock)	2 (trigger word or clock)
Digital Delay	999 clock pulses or 999 trigger words	99,999 clock pulses only
Data Collection Rate	8 MHz	20MHz
External Scope Req'd	Yes	Yes
Auxiliary Memory	No	Yes
Map Mode	No	Yes
External Trigger Output	Yes	Yes
Logic Family Compatibility	All but ECL	All
Modularly Expandable	Yes	Yes
Intensified Trigger Word	Yes	Yes
Weight	7 pounds	14 pounds
Power	10 watts	120 watts
PRICE	\$599.95 complete	\$2900.00 plus probes

WHAT IF YOU DON'T NEED ALL THAT CAPABILITY RIGHT NOW? Fine. Start with the Model 100A Logic Analyzer and save over 50%. You'll find that the Model 100A is a powerful 8-bit logic analyzer in its own right. Then add the mating Model 10 expander unit for an additional 16 bits when you're ready. (An optional baseplate locks the two units together.) Incidentally, if you have a few spare hours, purchase the kit versions and save another 25% per unit.

WHAT ABOUT DOCUMENTATION? We've got it. The Model 100A and Model 10 each come with a comprehensive 100-page instruction and applications manual. In fact, if you want to see how well these units can satisfy your application, buy the manuals first for \$4.95 each.

For additional information or a demonstration, contact your local Paratronics, Inc. Stocking Sales Office or Paratronics, Inc. 800 Gharcot Ave., San Jose, CA 95131.



PARATRONICS, INC.
Tel (408) 263-2252

SALES OFFICES: AL, Huntsville (205) 533-5896; AZ, Phoenix (602) 253-6104; CA, Costa Mesa (714) 540-7160, Sunnyvale (408) 733-8690; CT, Canton Center (203) 693-0719; FL, Winter Haven (813) 294-5815; HI, Waikiki (808) 922-2152; IL, Elk Grove Vill (312) 593-0282; IN, Indianapolis (317) 293-9827; MD, Burtonsville (301) 384-8500; MA, Wakefield (617) 245-5940; MI, Northville (313) 482-1229; MN, Minneapolis (612) 781-1611; NM, Albuquerque (505) 268-3941; NY, Syracuse (315) 448-1284, NYC, Elmont (516) 488-2100; NC, Raleigh (919) 787-5818; OH, Centerville (513) 433-8171, Cleveland (216) 331-0900; OK, Tulsa (918) 743-6892; PA, Hatboro (215) 674-9600; TX, Houston (713) 461-4487; AUS, Victoria (03) 288-7100; BRAZ., Sao Paulo (011) 221-2456; CAN., Ontario (416) 275-2270; CAN., B.C. (604) 985-0511; DEN., Horsens (05) 61 11 00; FR., Paris 668 10-59; HOLL., The Hague 070-678380; IS., Tel-Aviv 282031; U.K., Bracknell Berks (0344) 52929.

* See EDN Magazine's "New Product Showcase Issue," July 20, 1977.

Meetings

Asilomar Conference on Circuits, Systems, and Computers, IEEE et al., Asilomar Hotel, Pacific Grove, Calif., Nov. 7-9.

Midcon, IEEE, O'Hare Convention Center and Hyatt Regency Hotel, Chicago, Nov. 8-10.

Compsac 77—Computer Software and Applications Conference, IEEE, Sheraton-O'Hare, Chicago, Nov. 8-11.

Magnetism and Magnetic Materials Conference, IEEE, Radisson Hotel, Minneapolis, Nov. 8-11.

AAMI/FDA Conference on Medical Device Regulation, Association for Advancement of Medical Instrumentation and U. S. Food and Drug Administration, Hyatt-Regency Hotel, Washington, D. C., Nov. 15-16.

26th International Wire and Cable Symposium, U. S. Army Electronics Command (Fort Monmouth, N. J.), Cherry Hill Hyatt House, Cherry Hill, N. J., Nov. 15-17.

Electro-Time/77 U. S.—Design and Manufacture of Electronic Watches, International Society for Hybrid Microelectronics, Florida Chapter, Marco Beach Hotel, Marco Island, Fla., Dec. 1-2.

Semiconductor Interface Specialists Conference, IEEE, Carillon Hotel, Miami Beach, Dec. 1-3.

Chicago Fall Conference on Consumer Electronics, IEEE, Ramada-O'Hare Inn, Des Plaines, Ill., Dec. 5-6.

International Electron Devices Meeting, IEEE, Washington Hilton Hotel, Washington, D. C., Dec. 5-7.

National Telecommunications Conference, IEEE, Marriott Hotel, Los Angeles, Dec. 5-7.

1977 Winter Simulation Conference, IEEE, National Bureau of Standards, Gaithersburg, Md., Dec. 5-7.



FROM 20Hz TO 4,500 MHz

S-D has just the right counter for your communications and low frequency needs.

Communications Counters

Systron-Donner offers you a choice of no less than *four* communications counters from 100 MHz to 4,500 MHz. Small and lightweight, all of these counters feature the latest advances in high speed, precision frequency measurement.

- **Sensitivity:** 10mV RMS (Models 6241A, 6242A, 6243A). Model 6244A: 10mV RMS to 500 MHz, -13 dBm above 500 MHz.
- **Overload protection:** Withstands high input signal levels without damage.
- **Display:** 8 LED digits, 0.1 Hz resolution.
- **Tone measurement (opt.):** Example: measure 1020.01 Hz automatically in 1 sec.
- **Meet the whole family:** 100 MHz Model 6241A—\$595; 512 MHz Model 6242A—\$795; 1250 MHz Model 6243A—\$995; 4500 MHz Model 6244A—\$2150.

Low frequency counters, 10 and 80 MHz

Not all cost counters are alike! S-D's are different because they can *accurately* measure most of the signals encountered in low frequency applications. Here's why:

- Three-position attenuator: x1, x10, x100. (avoids false counting)
- Offset control allows measurement of *non-sinusoidal* waveforms
- Four selectable gate times from 0.1 Hz to 100 Hz
- 25 mV RMS sensitivity
- Advanced input circuitry to assure error-free measurements.

Model 6202B (10 MHz), \$295. **Model 6203B** (80 MHz), \$325. (U.S. prices only).

For sales assistance, contact Scientific Devices or Systron-Donner at 10 Systron Drive, Concord, CA 94518. Phone (415) 676-5000.

SYSTRON  DONNER

Before the board meets
to discuss rising
service costs,
call Tektronix



Our new 851 Digital Tester can give you the leverage to control those costs.

Managing a service organization is no bed of roses. It's big business. And it's continually getting more costly. Customer engineers, spare parts inventories, training, designing for serviceability, documentation, and instrumentation all contribute to these spiraling costs. Because service is so important to the success of a company, you need to identify those elements which have the greatest leverage for your service organization.

Consider instrumentation.

Typically it is less than 5% of your overall service budget. Yet the right test instrument can have a tremendous impact on the other 95%... training, salaries, inventory requirements, travel and backup.



That's why we built the new 851 Digital Tester. It's a synergistic, new service instrument that combines the functions of many instruments in one portable package.

We know that the task of servicing digital equipment is threatening to outrun existing service resources. Your first-line customer engineers are being required to make more intricate measurements on increasingly complex systems.

With the new 851, your first-line customer engineer will be able to solve more problems in less time on the first call. That's because he can rely on the measurement and interpretation capabilities of the 851 to perform complicated tests in the field. Not only does this save you the expense of calling in the back-up engineer, but it also gives your first-line engineer the satisfaction of solving more problems on the first call.

A new concept in service instruments.

Your inventory of service instruments probably includes oscilloscopes, DMM's, counters, timers, logic probes, thermometers, and some special purpose test equipment.

A bench full of test equipment is a great resource for your customer engineer to rely on... as long as he doesn't have to travel much.

But imagine a self-contained service instrument that weighs only 13 pounds and makes most of those same measurements.

That's our new 851 Digital Tester.



The power of the 851 lies in the fact that even though this one instrument makes the measurements of a variety of test gear, it is also easy to use.

With just one turn of the knob you can dial 22 different functions to make a wide range of system measurements and tests.

851 Functions

MEASUREMENTS		SIGNAL ANALYSIS	SELF TEST
VOLTAGE	TEMPERATURE	LOGIC STATE INDICATORS	TEST SIGNAL
PEAK (25 ns to 25 ms)	TIME (20 ns to 10 s)	HI, LO, INVALID, ACTIVE	EXERCISE FUNCTIONS
AC	PERIOD	% DUTY FACTOR	ADJUST PROBE
DC	FREQUENCY	COUNTING	READOUT TEST
POWER LINE	PULSE WIDTH	FREQUENCY RATIO	
INPUT LOGIC THRESHOLDS	INTERVAL	EVENTS BETWEEN START AND STOP PULSES	
RESISTANCE	COINCIDENCE	TRANSITIONS BETWEEN START AND STOP PULSES	
(0.1Ω to 50 MΩ)	TRANSITION	TOTALIZE	

It's easy. Just dial a function, probe the circuit being examined, and read the results directly from the auto-ranging LED display.

And what about product support? With Tektronix, it's worldwide.

Wherever in the world your service organization goes, Tektronix is with you all the way. Service personnel at 46 Tektronix Service Centers in the U.S. as well as service personnel in 50 other countries back our products.

Put the 851 to work in your digital service environment.

The measurement capabilities of the 851 make it particularly useful for servicing computer peripherals, small business systems, and industrial control equipment.

We had you in mind when we designed the 851 Digital Tester.


For a demonstration, visit the TEKTRONIX booth at WESCON. Detailed specifications, application notes and a color brochure are also available for your information. Please contact your Tektronix Field Engineer. Or write Tektronix, Inc., P.O. Box 500, Beaverton, OR 97077. In Europe, write Tektronix Limited, P.O. Box 36, St. Peter Port, Guernsey, Channel Islands.

New concepts in digital service

Tektronix
COMMITTED TO EXCELLENCE

For Technical Data, circle 28 on Reader Service Card
For Demonstration, circle 29 on Reader Service Card

What's beyond Saturn?

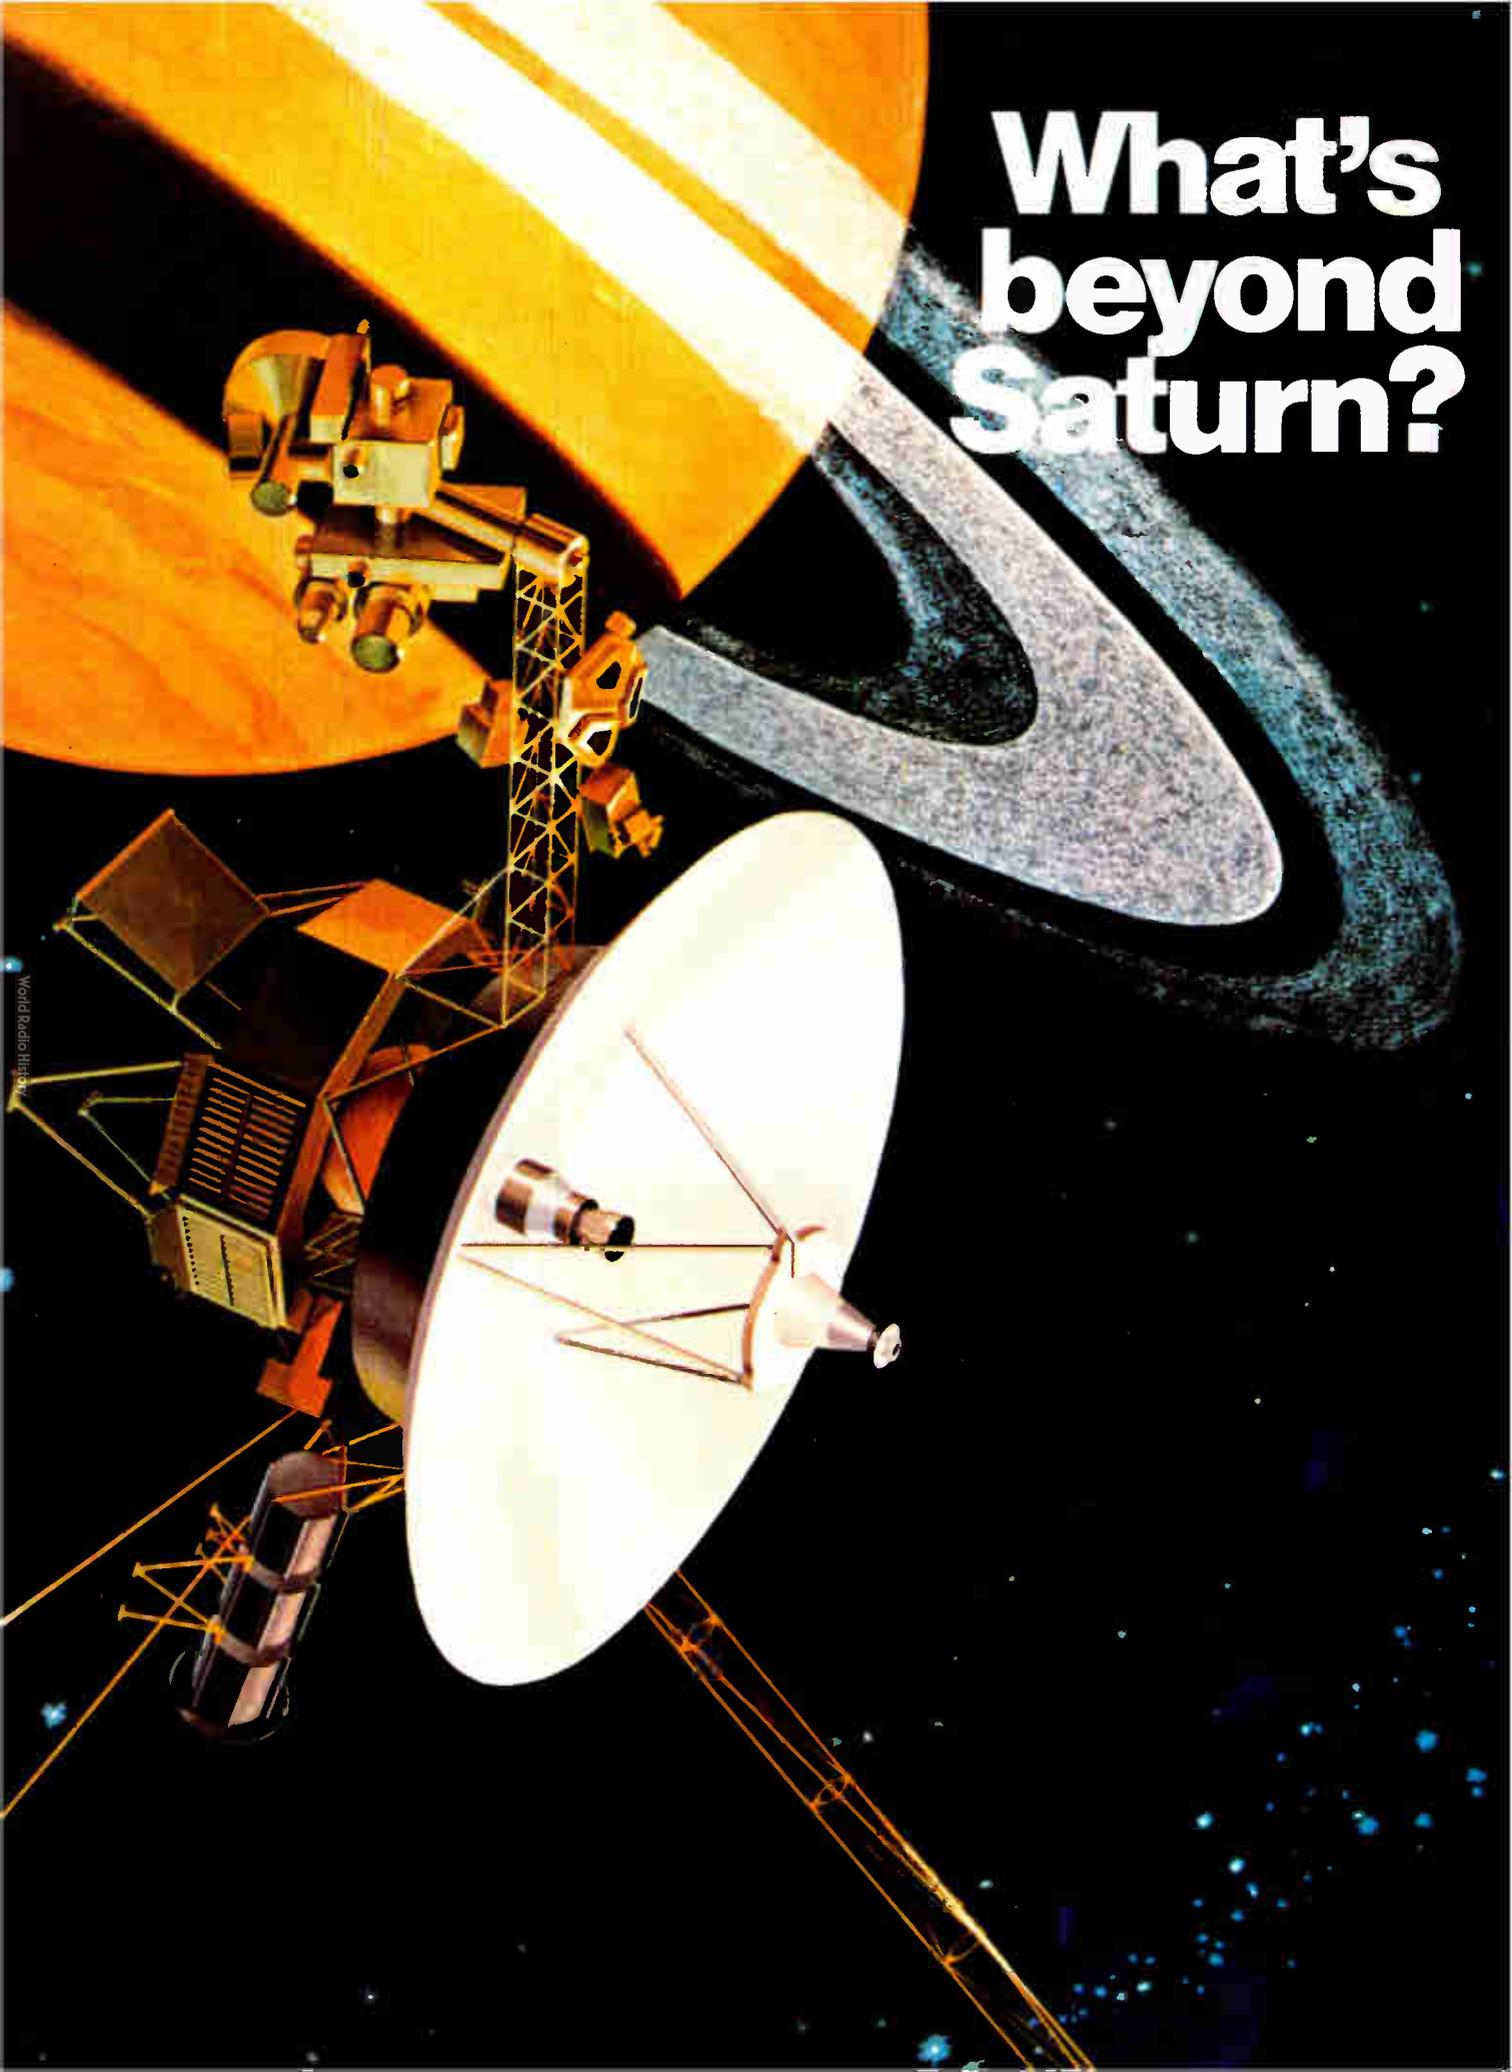

MODCOMP computers are helping bring back the answers.

On August 20, the National Aeronautic and Space Administration launched the first of two Voyager spacecraft atop a Titan Centaur rocket for man's most extensive reconnaissance to date of the outer planets. In September, the second Voyager was launched. Both vehicles were placed in trajectories that will take them to Jupiter and Saturn and past several moons of both planets. The spacecraft will arrive at Jupiter in March and July of 1979, and at Saturn in November, 1980 and August, 1981. One of the Voyagers may then be targeted for the first encounter with Uranus, some 1.7 billion miles from Earth, and possibly Neptune. The decade-long journey could take the vehicles to as many as 15 different planets and satellites.

The success of the Voyager projects will be measured by the ability of scientists to track and monitor the activities of the spacecraft and process the vital data returned to Earth. These critical functions are primarily performed for Voyager and other ongoing space missions, including Pioneer, Viking and Helios, by a series of MODCOMP computers in the Deep Space Network of Jet Propulsion Laboratories in

Pasadena, California, which includes tracking stations throughout the world.

Meeting or exceeding exacting specifications for performance and reliability such as those required by NASA/JPL to help guarantee the success of these missions, is not unusual for MODCOMP. In fact, it has become a way of life.

When it comes to solving problems with computers, MODCOMP leads the way. Whether your application calls for a single, stand-alone system, or a full-blown network of computers.

To learn more about how we can help you, contact Modular Computer Systems, Inc., 1650 West McNab Road, Ft. Lauderdale, FL 33309, Phone: (305) 974-1380.

MODCOMP®

Solving Tomorrow's Problems Today

European Headquarters:
Expcrt House, Woking, Surrey, England
Phone: (04862) 71471

Artist's concept of Voyager Spacecraft passing Saturn—courtesy of NASA/Jet Propulsion Laboratory


Circle 31 on reader service card

When you're small you've got to be tough to last.

This rugged little $\frac{1}{8}$ -watt fixed resistor (.145 L x .062 D) is hard to beat in durability. It's the Type BB... part of a family that has passed nearly 800 million unit test hours without a single failure. It's small enough to be mounted on .300 by .100 hole centers, eight in the same space as one dual in-line package. It takes transient pulses that would knock out most any film resistor of similar dimensions. Performance is exceptionally consistent from one resistor to the next. We have the space-saving resistors you need. Our distributors have them when your need is now.

Tough, high reliability

Proved in nearly 800 million unit test hours without failure.

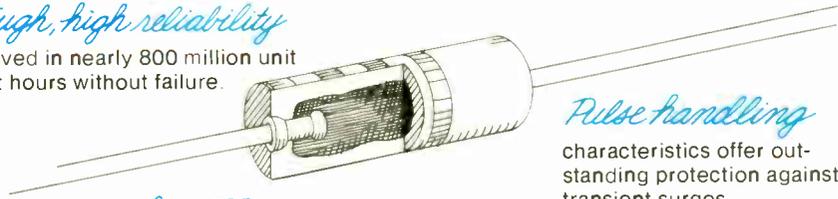


Pulse handling

characteristics offer outstanding protection against transient surges.

Low TCR

typically less than 200 PPM over normal operating temperature range of +15°C to +75°C.

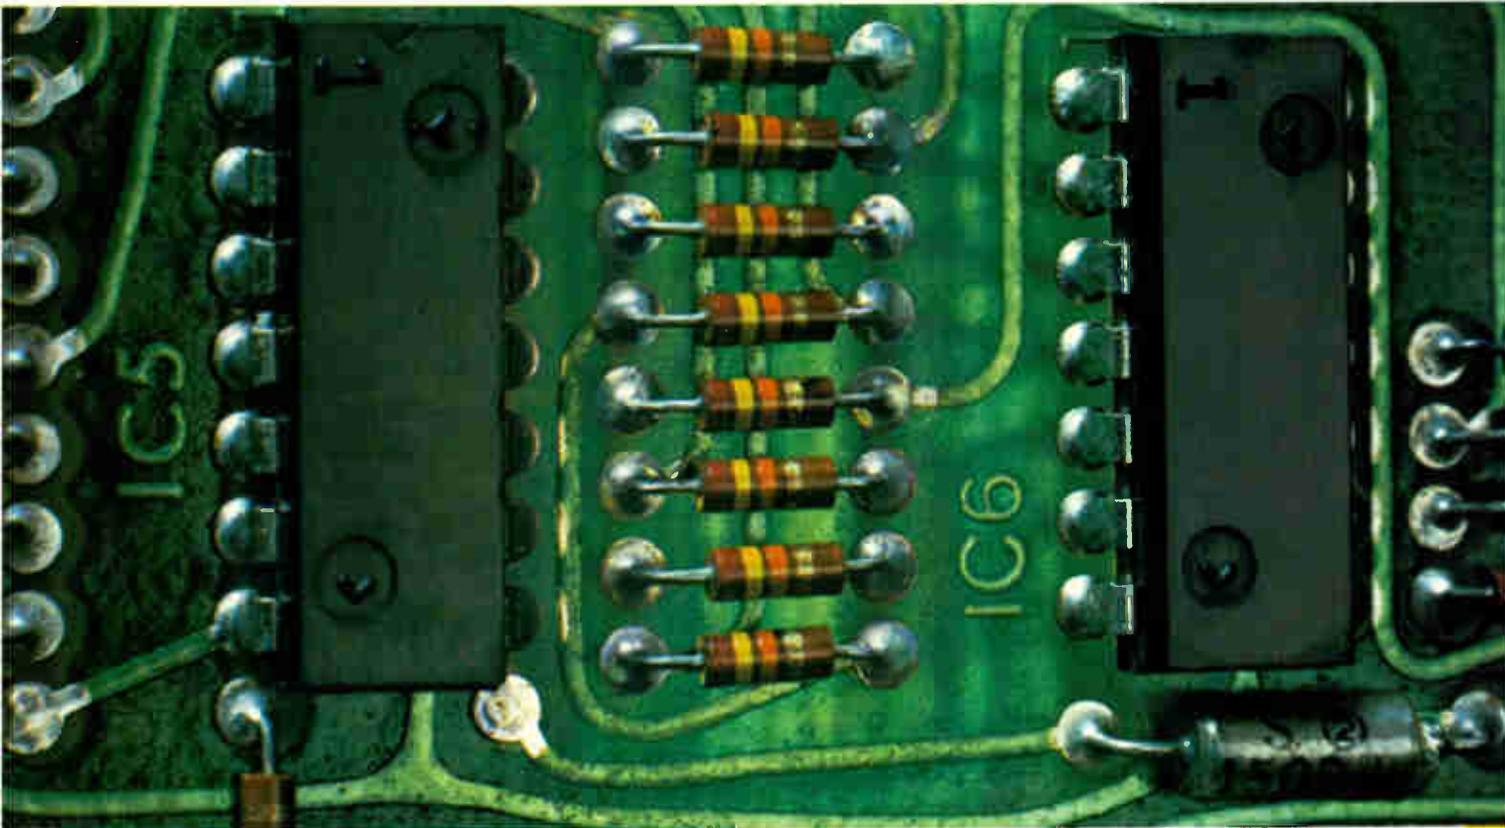

Quality in the best tradition.



ALLEN-BRADLEY
Milwaukee, Wisconsin 53204

CONTACT YOUR
ALLEN-BRADLEY DISTRIBUTOR OR
WRITE TO ELECTRONICS DIVISION

EC146

DEC Introducing Its first 32-bit mini

Digital Equipment Corp. is expected to announce its **long-awaited entry into the 32-bit minicomputer market**. The system, to be named VAX— for virtual address extension—will prove to be a boon for PDP-11/70 users who need the additional addressing capability, but wish to continue on PDP software. With its own operating system for 32 bits plus compatibility with DEC's 16-bit systems, the VAX can directly address 2 megabytes of memory, which DEC is implementing with its first wholesale use of 16,384-bit random-access memory chips.

Push Into In-circuit tester market speeded by Teradyne

Teradyne Inc., the Boston manufacturer of test and semiconductor production equipment, is making its biggest move to date into the market for in-circuit board testers with the introduction this month of its L529 assembly inspection system. The L529 prescreens loaded analog, hybrid, and digital circuit boards for between 70% and 90% of assembly and component faults prior to functional testing of the board. Earlier this year, Teradyne introduced the L429, which was limited to prescreening boards for short circuits, but the new system puts Teradyne **in direct competition with the two small companies that have dominated in-circuit testing until now**—Faultfinders Inc. and Zehntel Inc. Teradyne's Jeff Hotchkiss, product manager for in-process test equipment, expects heavies GenRad Inc. and Hewlett-Packard Co. to be close behind Teradyne into the in-circuit board test fray, and for the competition to get "really fierce."

Motorola lands memory system job called biggest of 1977

A relative newcomer to the memory systems business has made what shapes up as the biggest sale of the year. Motorola Semiconductor, Phoenix, after barely one year in the business, has signed a contract with the Link division of Singer Co., in Binghamton, N. Y., to supply 256-megabit systems, each containing 18,000 16-k 6616 dynamic RAMs, and 6800-microcomputer control to replace rotating memory disks. **Initial orders are in excess of \$1 million**, potentially running as high as \$20 million. Final competition was between Motorola and Intel Corp., which was offering a charge-coupled-device version.

Intel reorganizes microcomputer, components units

In response to **ever-increasing pressure, especially from small, feisty semiconductor manufacturers** like Mostek Corp. in dynamic memories and Zilog Corp. in high-end microcomputers, Intel Corp., Santa Clara, Calif., has reorganized its operations into more manageable divisions. The former microcomputer group has been split into two—a components division headed by Leslie L. Vadasz, formerly assistant general manager for microcomputers, and a systems division, headed by William C. Davidow, formerly general manager for microcomputers.

The semiconductor components side of the house, which will be headed by Edward L. Gelbach, formerly senior vice president and general manager, has in turn been divided into two divisions—a fast static and dynamic memory division headed by Ron Whittier, formerly director of engineering for components, and a static random-access-memory, erasable read-only-memory, and bipolar ROM division, headed by George Schmeer. Jack C. Carsten, marketing vice president, will have worldwide marketing responsibility for components. Gelbach will also have responsibility for special component developments for such dedicated applications as automotive and telecommunications. This is the third reorganization of a

major semiconductor manufacturer in the last few months, following realignments at National Semiconductor and Fairchild.

Zilog chips in with more power; Mostek enhances 3871

Microcomputer designers can look forward to powerful new entries next year at both ends of the performance spectrum. Zilog Corp. of Cupertino, Calif., whose growing Z-80 microcomputer family was the first enhanced 8-bit multichip design, will offer two: a single-chip Z-8 version for stand-alone and minimum-chip controller configurations, and a 16-bit Z-8000 design for powerful high-end minicomputer applications. The expandable, single 5-v Z-8, which promises to be the fastest one-chipper to enter the market, can execute some instructions in as short a time as 1.5 μ s using a 4-MHz clock. The part has 2 kilobytes of read-only memory, 96 bytes of random-access memory, and 32 input/output ports.

The 16-bit Z-8000, which functionally stands in the PDP-11/70 class, will include difficult-to-implement multiply and divide instructions and enough data-handling power to manage large blocks of external memory. The company will also introduce the microcomputer industry's first high-level Cobol language set, for its midrange Z-80 family, in November and Fortran in December.

Meanwhile, Mostek Corp. is planning an enhanced version of its stand-alone 3871 one-chip design by year's end. The part will have 4,096 words of ROM—the biggest program capacity of any one-chip part—and 1,028 bytes of RAM, twice as many as the 3870.

Switching transistor from Westinghouse called biggest yet

Westinghouse Electric Corp.'s Semiconductor division in Youngwood, Pa., has developed and made available what is perhaps the biggest switching transistor in existence. Designed for the industrial marketplace to eliminate problems with thermal fatigue, the new D60T series devices, **made with the firm's thyristor process**, have a gain of 15 at 50 A and a peak-power-handling capability of 200 A and 450 to 550 v. The stud-mounted devices have fast switching speeds—less than 1- μ s turn-off and turn-on times.

Addenda

Memory makers are having trouble delivering enough 16-k RAMs. **Thus the heavy demand is pushing average selling price to between \$20 and \$30.** Mostek Corp. is the leader with 800,000 units this year, followed by Intel Corp. and Fujitsu Ltd. with another 800,000 between them. . . . To conform to industry standards and in response to the success of unlatched 16-k dynamic RAMs, Intel is producing a new part, the 2117, **that can operate either latched or unlatched.** . . . Engineers at Bell Laboratories in Murray Hill, N. J., have developed a 16-k charge-coupled-device memory **optimized for 10-megahertz operation.** While there are 65-k CCD memories, they operate in the 2-to-5 MHz range. . . . Harris Corp. has unveiled four systems designed to automate newsrooms, composition rooms, and ad departments of **smaller daily newspapers** with circulations of 20,000 to 50,000. Harris's previous emphasis was on large metropolitan dailies. The smallest of the new 2530 series, the 2531, which has four computer-linked terminals, will sell for \$225,000. Other prices range to \$295,000. . . . NASA is going to reorganize its headquarters **"by way of streamlining things,"** says Administrator Robert Frosch. Details are due in mid-November.

D/A and A/D Converters

DDC offers two new hi-rel four-quadrant multiplying hybrid D/A converters at competitive prices.

The MDA 100 is a true 10 bit multiplying D/A converter with a full 10 bit linearity. An 11 bit linearity unit is also available. The 16 pin MDA 100 is a pin-for-pin replacement for the Analog Devices AD-7520 and the Hybrid Systems HS-331.

The MDA 120 is a true 12 bit multiplying D/A converter with a full 12 bit linearity. This 18 pin device is pin compatible with the AD-7521.

Exclusive internal pull-up resistors guarantee logic compatibility. DDC's usual high reliability features include welded instead of soldered lid design for the ceramic package for the most rugged military and industrial applications.

For hi-rel, high performance products DDC is your first source. Write or call your nearest DDC representative, listed in EEM, or call Mike Andrews at 516-567-5600.

New Hi-Rel Multiplying DACs from **DDC**

True 10 or 12 bit linearity. Meets MIL-STD-883 Class B.


S/D and D/S
First Hybrid
Synchro Converters

Custom Hybrids

Signal
Data
Conversion
Systems

A.T.E.
Synchro
Instruments

Video Converters
Unmatched Size/Performance

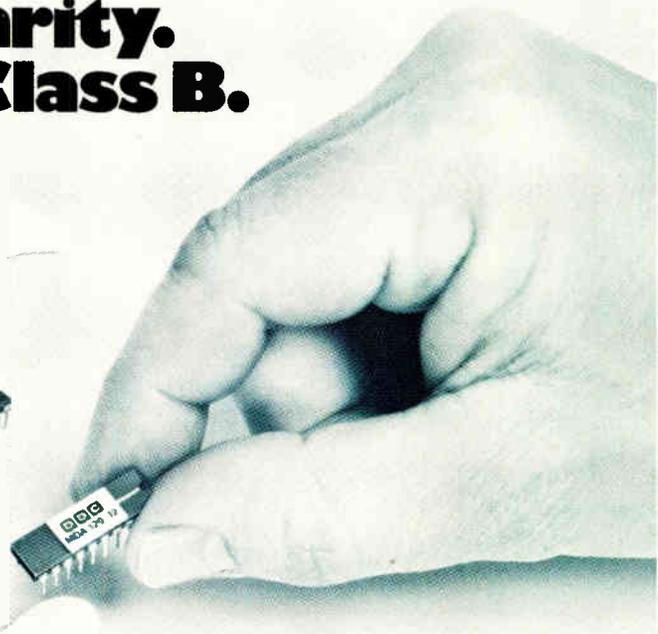


**ILC DATA DEVICE
CORPORATION**

A Wholly Owned Subsidiary of ILC Industries, Inc.

Airport International Plaza, Bohemia, New York 11716
516-567-5600 TWX 510-228-7324

ILC DOVER is the
sole designer
and manufacturer
of the Apollo,
Skylab and Shuttle
space suits.



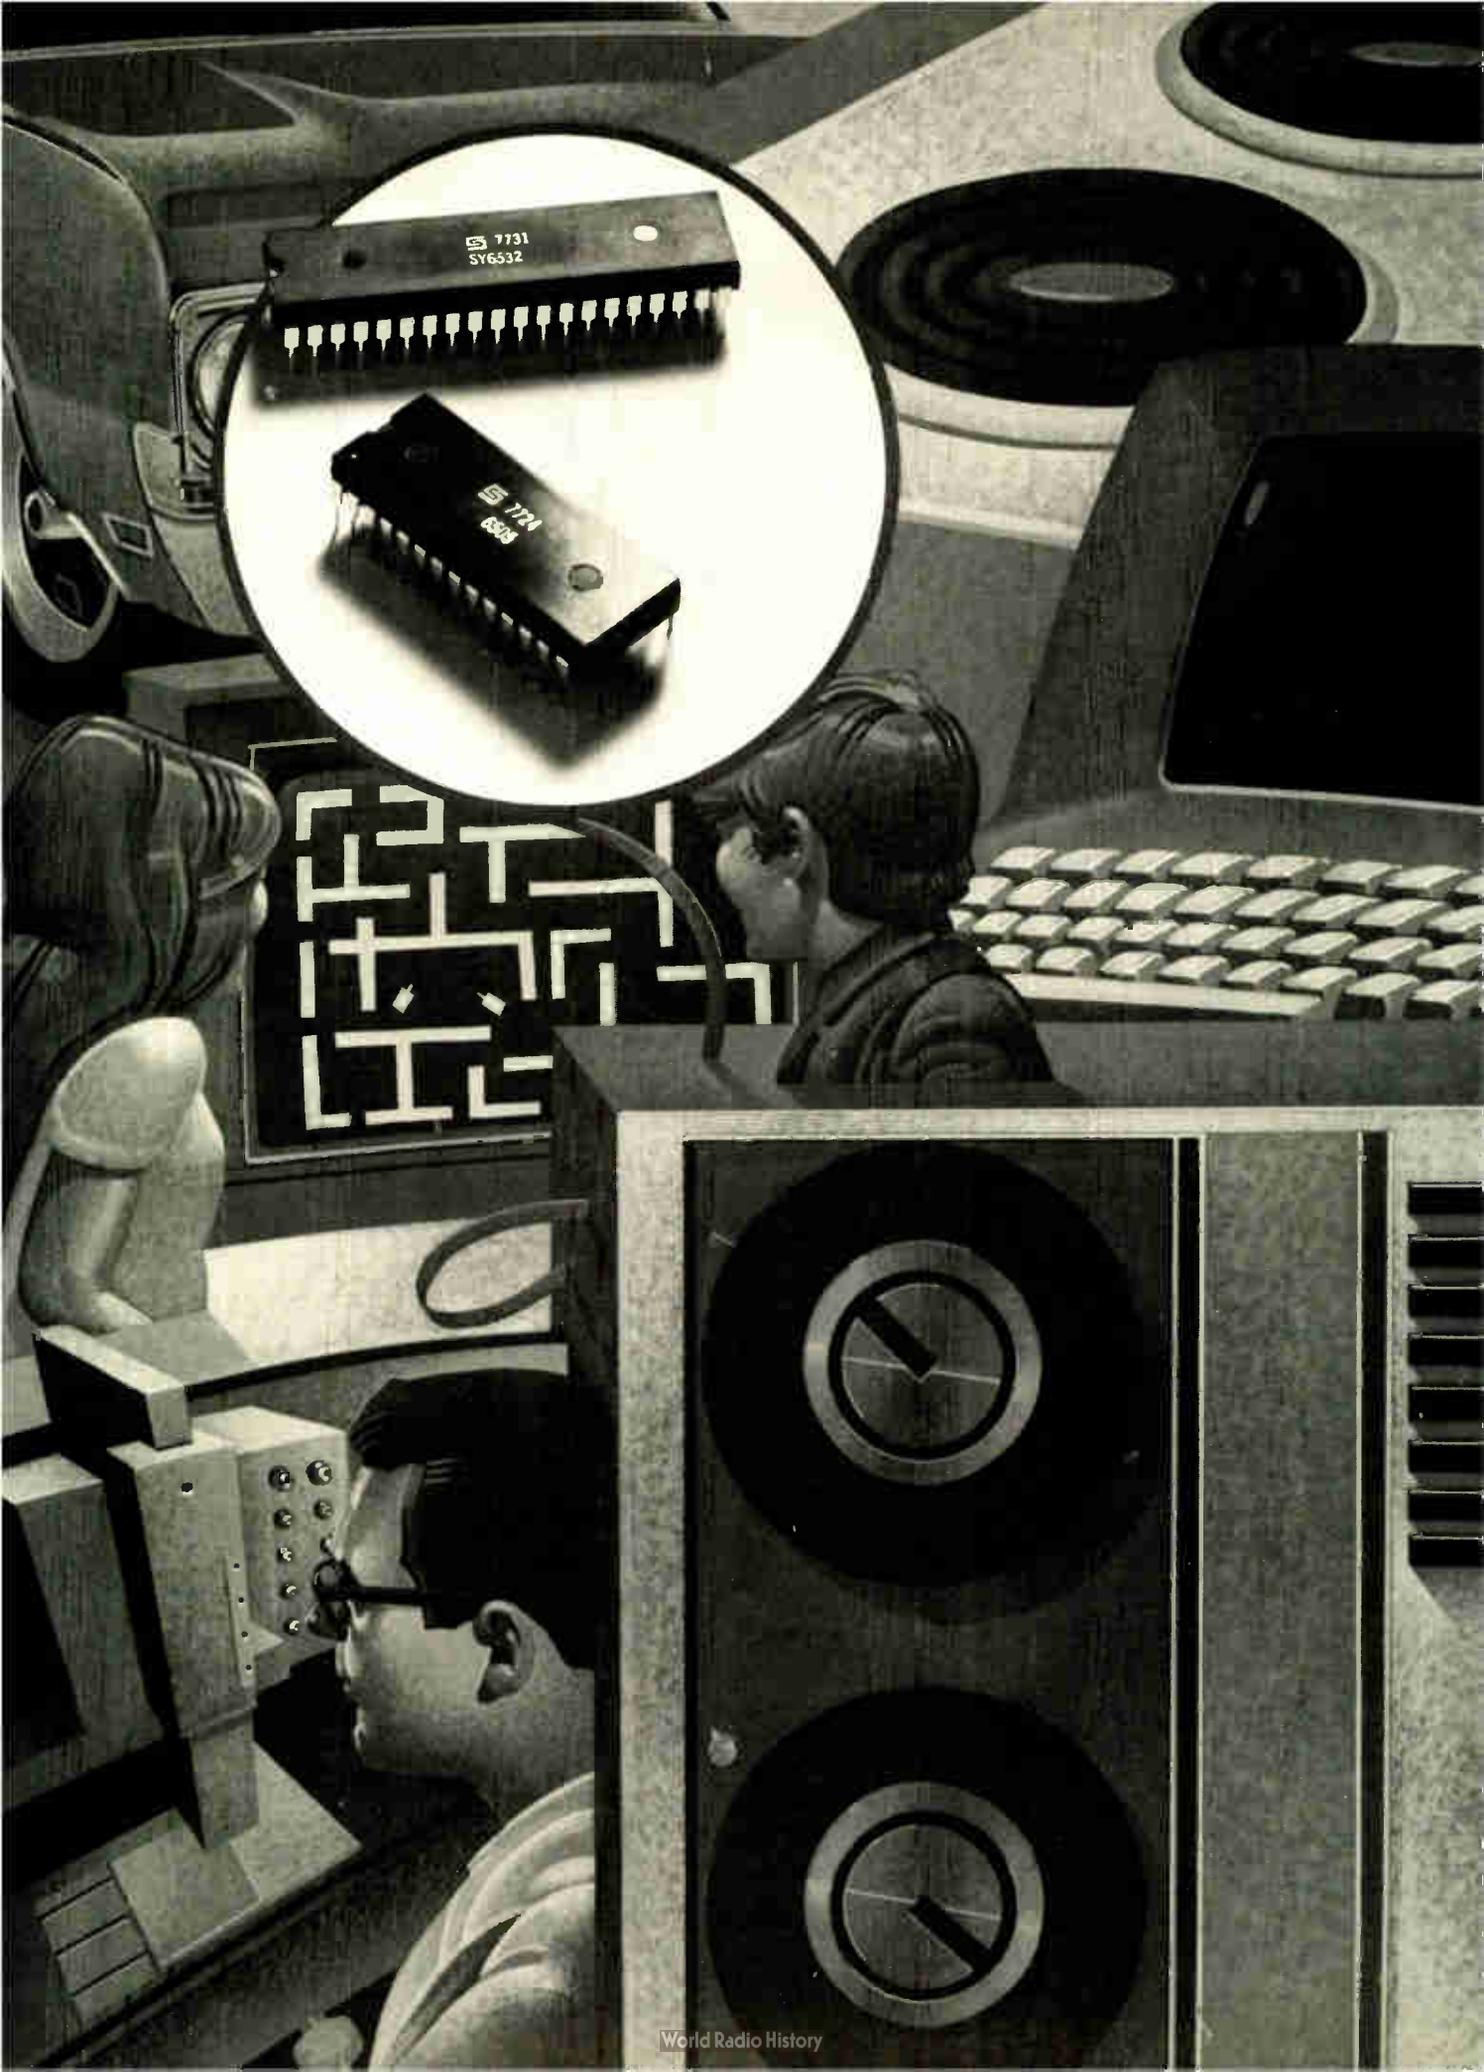

When the chips are down

The lowest cost, highest performance microprocessor wins.

And here it is: the 6500.

A full family of nine software compatible microprocessors, with comprehensive interface circuits and all the supplementary memory you could need. The technology is N-Channel Silicon Gate with Depletion Load implementation and Ion Implantation. This means the smallest real estate coupled with high speeds and a host of performance benefits.

Low Cost.

The 6500 is already established as the most popular third generation microprocessor family. We will ship 300,000 microprocessors this year, for good reason. More capability at remarkably low cost, for the chips themselves, and for the overall system.

The microprocessor itself is low cost because:

- Smaller die than the 6800 or 8080.
- 28 pin versions available (pick the one that's right for you — pay only for what you need).
- In high volume production — the more we make the better we get and the learning curve advantages derived are passed on to the customer.

Your system will be low cost because:

- Less ROM required for programming code due to the flexibility provided by having 13 different addressing modes!!
- Minimum system requires only 2 chips. Select one of our microprocessors, add a 6530 (RAM: ROM:I/O:Timer) and you have a microcomputer system.
- Lower component costs.

High Performance.

A fast 2MHz standard.

At 2MHz, the 6500 has a potential throughput equal to a 6800 or 8080

running at 4MHz — if they could. All our microprocessors are software compatible within the group and bus compatible with the 6800. Makes it easy to improve performance and costs in existing 6800 applications.

True Pipeline Architecture.

Unusual in a low cost microprocessor, but even as the 6500 microprocessor is interpreting one instruction, it is accessing the next memory location. By doing its tasks in parallel, the 6500 attains tremendous system throughput, and overall performance you'd expect to cost much more.

Thirteen Addressing Modes and a Host of Other Advantages.

Our thirteen different addressing modes include zero page and indirect indexed, features you'd not normally look for in a low cost microprocessor, but we have them. The flexibility of these addressing modes allows you to write your programs using an average of 20-40% less code. This means a savings in the amount of ROM required.

With a choice of internal or external clocks and drivers, you can optimize the costs vs. timing control requirements.

The 6500 family operates from a single 5 Volt power supply; it has true indexing capability, two interrupt modes and addressable memory range up to 65K bytes. It offers both decimal and binary arithmetic.

Outstanding Interface Chips.

Our interface chips combine functions which required several packages in first generation microprocessor systems. All feature 8-bit bidirectional data bus for interface to the microprocessor. The SY6530 has a 1K byte ROM, 64 byte RAM, interval timer and I/O. The SY6532 has 128 bytes of RAM, interval timer and I/O. The SY6520 Peripheral Adapter has

two 8-bit bidirectional data ports, four peripheral control/interrupt lines and is available at either 1 or 2MHz. It is a high performance replacement for the 6820 Peripheral Adapter. The SY6522 Versatile Interface Adapter offers all of the features of the 6520 plus latching inputs, two fully-programmable interval timers and an 8 bit shift register for serial interface.

Compatible RAMs and ROMs.

Where the application requires additional memory, we offer fully compatible 4K Static RAMs (2114) and 16K Static ROMs (2316A, 2316B). Our mask programmable ROMs are available in two week prototype turnaround, and we're geared for rapid shipments in production volumes.

Multiple Sources, of course.

Rockwell and MOS Technology are shipping identical parts on all members of the 6500 microprocessor family and interface circuits. New designs are cross-fed among all three as part of the cross-licensing agreements. In addition to price and performance, you're assured of availability, too.

Complete Information is Free.

We want you to know all about this low cost, high performance microprocessor family. For data sheets on any or all of our products, or more detailed information, call or write to:

Jerry Demsky, Synertek,
3050 Coronado Drive, Santa Clara,
CA 95051. (408) 984-8900.
Twx: 910-338-0135.

Synertek

Circle 37 on reader service card

Don't waste money and ruin PROMs. Move up to a first-rate programmer.

What defines a first-rate programmer?

A first-rate programmer is easy to use, safe (U.L. listed), reliable, backed with a long-term warranty, and flexible enough to handle advances in PROM technology, a combination you get only with a Pro-Log programmer.

Our systems take the mistakes out of programming.

Our Series 90 PROM Programmer walks you through the programming process so there's less chance for misprogramming. Separate sockets for master and copy PROMs make it impossible to accidentally destroy a valuable master.

Vendor-approved programming, full portability, free 2-year warranty.

Using vendor-approved PROM personality modules, Pro-Log's field-proven programmers program every major MOS and bipolar PROM. They also program generic PROM families and do gang programming.

They weigh less than 20 pounds so they go where you need them. And they're backed by the longest warranty in the industry, 2 full years parts and labor.

A first-rate programmer is economical, too.

A Series 90 master control unit costs only \$1,800. A Series 92 PROM Duplicator master control unit costs only \$1,145. Single PROM personality modules cost from \$325 to \$450. Generic modules start at \$350. Gang modules which program 8 PROMs simultaneously are \$895. All modules come U.L. listed and fit both the Series 90 and the Series 92. Options include CMOS RAM buffer (to 4K bytes), RS-232 (terminal or modem) interface, TTY, parallel interfaces, paper tape reader, U.L. listed erase light, checksum option, and Auto-baud.*

Find out what else a truly first-rate programmer has to offer.

Call or write for a free pamphlet giving you comparison checkpoints. Pro-Log Corporation, 2411 Garden Road, Monterey, CA 93940. Phone (408) 372-4593.



PRO-LOG
CORPORATION

Microprocessors at your fingertips.

*Trademark, Pro-Log Corporation.

Circle 38 on reader service card



Optoelectronic plug-in modules aim at computers

Hewlett-Packard designs transmitter, receiver units to be linked by fiber optics for computer-interface chores

Now making headlines in telecommunications, fiber optics may next make it big in computing systems, if Hewlett-Packard Co. has any hand in the matter. To encourage such a development, it has built optoelectronic replacements for conventional line drivers and receivers.

The firm's Optoelectronics division in Palo Alto, Calif., is readying a pair of transmitter and receiver hybrid-circuit modules designed to make things easy for a would-be user of fiber-optic cable. Moreover, according to HP's project manager, Del Hanson, the modules are already being tried out by a select handful of original-equipment manufacturers. These include OEMs involved in computer-to-peripheral interface and process-control applications—areas HP will concentrate on developing—as well as digital communications. HP will not say who the OEMs are. Also included are groups in other HP divisions, whose feedback should influence the final design.


System solution. "We have endeavored to solve a systems problem rather than just offer a bunch of parts the user must put together," Hanson points out. Only a 5-volt supply is needed to put a user on the air once a fiber-optic cable has linked the transmitter and receiver modules diagrammed at the right. The light-emitting-diode transmitter contains a modulator interfaced with

the digital data input by transistor-transistor logic. The receiver module has a p-i-n photodiode detector and 100-decibel gain amplifier and includes automatic leveling circuitry to accommodate a wide input dynamic range.


But HP has not stopped there. It has also designed into the receiver automatic monitoring circuitry that sends diagnostic pulses over the link to check for continuity even when no data is being transmitted. The optical line-coding technique on which the monitor relies is transparent to the user and has been patented by HP, Hanson says.

Each module comes in a five-pin, single in-line package with an optical-fiber connector. At 0.31 inch high, they are about the size of the small 9-v battery used in transistor radios and can be plugged right into existing data-communications systems. "They replace the line drivers and receivers that accept TTL inputs and operate over a twisted pair," says Joseph Bagley, HP's product marketing manager.

Such twisted-pair links can reach data rates of a few megabits per second, but only over relatively short distances, he explains. For longer distances, the data must be fed into

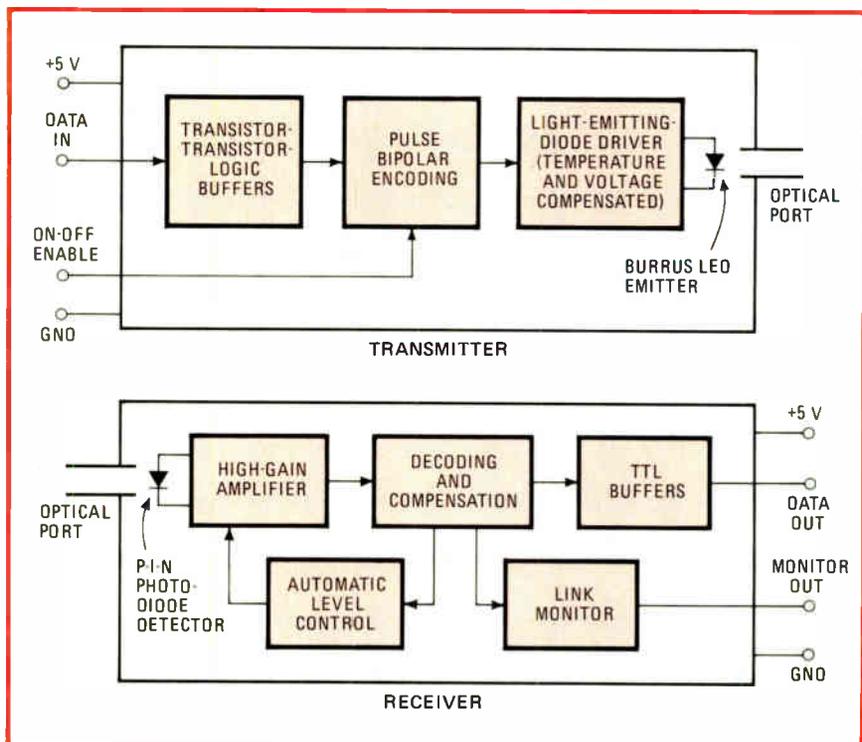

Almost complete. Transmitter and receiver modules contain the elements, like an automatic level control, TTL buffers, and link monitor, that a user ordinarily would assemble separately. All that is required now is a 5-v supply and an optical-fiber cable.

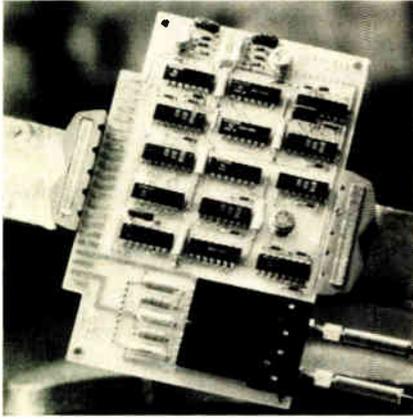

Pluggable. Pair of optoelectronic modules plug into printed-circuit board, shown with circuits for handling data-encoding chores.

modems and sent over a telephone line or dedicated in-plant line, but then data rates are more limited—to about 20 kilobits per second.

The fiber-optic modules, on the other hand, will handle far higher data rates—up to 10 megabits per second, synchronously or asynchronously—and for any distance up to a kilometer with no adjustments, Bagley points out. “With automatic leveling, the system behaves like a long TTL gate and requires no adjustments to adapt to varying link lengths,” he says. Also, the system is far more secure in noisy environments and where protection against lightning and freedom from ground loops are essential.

Next year. “We expect to have fiber-optic modules on the market by the middle of next year,” Bagley says. Except for the cable, HP will fabricate all of the system elements. These include the connector and the gallium-aluminum-arsenide Burrus-type LED that operates at 820 nanometers in the infrared. Such LEDs have long been products of the Optoelectronics division, as well as photodiodes, optical couplers, and laser diodes.

The LEDs deliver 100 milliwatts of optical power into the fiber at a drive current of 35 milliamperes. Up to 1 km, the system’s bit error rate will be 10^{-9} for data rates to 10 Mb/s, according to Bagley. For shorter distances—up to about 300 meters—a 20-Mb/s data rate with better error rates is possible. □

Fiber optics

Computer uses stir interest at IBM

While Hewlett-Packard Co. readies its new optoelectronic modules, none other than IBM is smiling on the application of fiber optics to the computer. At least, the technology was viewed favorably by R. Gary Burke, manager of advanced networks at IBM Corp.’s System Communications division at Research Triangle Park, Raleigh, N. C., in a paper he delivered earlier this month at the International Telecommunication Exposition in Atlanta.

Burke maintains that fiber optics will be welcomed into the computer itself, not just into the telecommunications lines that link systems, because of problems insoluble with present technologies. This means that fibers could very well be replacing copper wires on a one-to-one basis, rather than being used for the multiplexing of thousands of signals that their huge bandwidths can readily permit. One reason, says Burke, is the density of interconnections required for increasingly complex computers: as many as 100 fibers per linear inch can be packed together, compared with a limit of 20 wires. Moreover, other drawbacks of wire, such as electromagnetic interference, crosstalk, and the cost of copper itself, should spur development of cheap, noise-immune fiber-optic cabling, he points out.

Market forecast. Agreeing with Burke is Helmut F. Wolf, a vice president at the market research firm of Gnostic Concepts Inc., Menlo Park, Calif. In a paper also delivered at the Atlanta meeting, he predicted that as early as 1980 there will be a \$119 million worldwide market for optical fibers and connectors, and 16%—or about \$19 million—will be used in computers alone. By 1990, in fact, Wolf even expects to see optical signals in data processing—involving fully integrated systems without the need for electro-optic conversion.

Burke divides the computer applications into four areas according to path length. The longest runs will be in “data-highway” applications of up to about 3 kilometers—for example, in process-control systems where wires must be run from many sensors to central computers. The fibers’ small size, low cost, and immunity to interference will make them a natural for the harsh environment of in-plant networks just as soon as reliable hardware for tapping the fiber-optic cables is available, Burke says.

The second area of applications is in what Burke calls extended machine rooms: computer centers with mainframes and peripherals requiring links of up to about 300 meters. Here, fiber optics can overcome the distance/data-rate tradeoffs of coaxial cable, covering much greater distances without distortion. This is particularly important in parallel data transfer, where skew among channels is intolerable.

Burke’s third computer hardware segment that could be served by fiber optics is on the level of local attachment—word-processing and small-business-system equipment in offices and contained within a diameter of 30 meters. The electrical isolation that fibers afford, as well as the ease with which they can be hidden, is unmatched by wiring.

Finally, fibers will work right down into the circuit board wiring itself, requiring lengths of 3 m and less. Here, fiber optics offering high interconnection density without crosstalk is right at home.

Hardware needed. When will the switchover from wires to fibers occur? As far as IBM is concerned, Burke refuses, of course, to say. But the transition hinges on more than IBM’s desires, for qualified hardware has yet to be made available. “We need more development of output devices and receivers,” Burke says, to get out of what he calls “the crystal set age,” referring to the days of radio some 75 years ago. Also needed are low-cost electro-optical interfaces, he adds, concluding, “we haven’t even got a single inexpensive connector yet.” □

Photovoltaics

Silicon ribbon attains width of 3 inches

He has been able to do it only twice now—pull silicon out of a melt in a ribbon that is 3 inches wide. But for A. I. Mlavsky the feat has heartening implications. “We have proven the basic postulate that we can grow silicon consistent with the goal of cutting solar cell costs to 50 cents per peak watt,” says the executive vice president of Mobil Tyco Solar Energy Corp. in Waltham, Mass. But, he adds quickly, there is still much to be done to perfect the system, which relies on the process of edge-defined, film-fed ribbon growth that his company has pioneered.

Cartridge. Until now, Mobil Tyco, formed in January 1975 by Mobil Oil Co. (which owns 80%) and Tyco Laboratories Inc. (20%), has been able to repeatably produce only 1- and 2-in.-wide silicon ribbon. For the 3-in.-wide ribbon, it has built a special cartridge, shown at the top right, that is placed above the trough-like silicon furnace. The cartridge guides and cools the ribbon as it is pulled through the same kind of die used in the company's conventional film-growth process.

Growth is initiated by touching a seed to the silicon meniscus that forms at the top of the die. The seed is then pulled up through the top of the approximately 9-in.-high cartridge, and a belt and pulley system moves the ribbon up. The shape of the ribbon, including its thickness, is controlled by the dimensions of the slit in the die.


Altogether, about 4 feet of the 3-in. p-type silicon ribbon has been pulled through at a rate of 3 in. per minute, using one cartridge at a time. The ribbon has been about 0.5 millimeter thick. Thinner ribbon—less than 8 mils thick—would be suitable for solar cells and could be grown faster. But to grow ribbon faster, and thus bring costs down, Mlavsky counts on using several sets of die and cartridge simultaneously. For example, Mobil Tyco has grown three 1-in. ribbons at a time from a single melt and has built a cartridge and furnace system capable of producing five 2-in. ribbons at a time.

The work is being done under contract to the Department of Energy as part of the Low-Cost Silicon Solar Array Project administered by the Jet Propulsion Laboratory in Pasadena, Calif. The goal of the project is to produce solar cells costing 50 cents per peak watt of electric output power by the year 1986.

New high in solar panel efficiency

While continuing to refine its cartridge-growth process for silicon ribbon, Mobil Tyco Solar Energy Corp. has also reached a new milestone in solar cell panel efficiency in a panel whose cells were made with its conventional edge-defined, film-fed growth (EFG) process. A panel containing 42 cells each measuring 1 by $\frac{3}{4}$ inch was rated earlier this month at an overall efficiency of 8.49%. Japan Solar Energy Co. recently reported efficiencies of 6.3% in commercially available panels made up of EFG-grown cells [*Electronics*, Oct. 13, p. 53]. The Japanese firm is partially owned and licensed for the EFG process by one of Mobil Tyco's parents, Tyco Laboratories Inc., headquartered in Exeter, N. H.

The Jet Propulsion Laboratory has reported panel efficiencies as high as 7.3% in panels made from circular cells that were part of a buy of 46 kilowatts of solar cells. Considering cell area alone, and not including the borders of the package, the Mobil Tyco panel has an efficiency of 9.3%. A. I. Mlavsky, executive vice president of the company, stresses, however, that the panel was carefully selected and that Mobil Tyco will not be in small-quantity production of such efficient panels until next year. “But it indicates what we can do with the EFG process,” he observes.

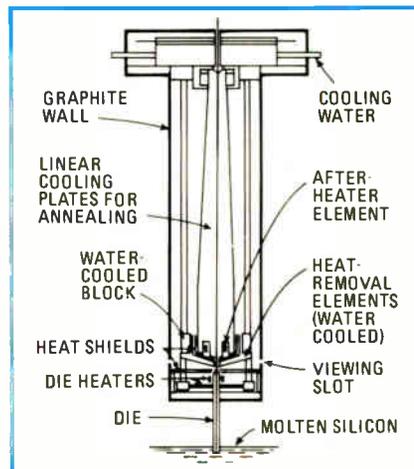

Grower. Special Mobil Tyco cartridge helps cool 3-in.-wide silicon ribbon as it is pulled from molten furnace. This annealing prevents brittleness and shattering.

Mlavsky explains that the work at this point is “aimed at getting the mechanical bugs out of the design,” rather than producing good-quality silicon. “It’s a very complicated piece of machinery,” he says of the cartridge, “and we’re working at modifying its cooling and heating systems.”

The cartridge overcomes one of the biggest obstacles to fast ribbon growth: brittleness and the susceptibility of the ribbon to shattering. The wider ribbon can shatter easily if it cools too quickly after being pulled through the die. To solve the problem, Mobil Tyco's cartridge incorporates heat-removal elements made up of water-cooled shoes through which gases pass to cool the ribbon and solidify it faster. Then the ribbon is reheated and cooled to relieve the stresses that could cause shattering.

As the ribbon is pulled up through a set of cooling plates, its temperature drops gradually from about 1,200°C to 600°C. The pulley and belt system that moves the ribbon through the die and cartridge is attached to the top of the latter. When the ribbon reaches an appropriate height, it is scribed and broken off, to be cut later into individual rectangles for solar cells.

How wide will Mobil Tyco eventually grow the ribbon? Mlavsky is

not sure. "The size of the solar cell would depend on the final panel size in terms of current and voltage and on the kind of cell-making machinery that is available," he says. "A very large cell would, for example, be difficult to metalize, and there are limits on the sizes of diffusion furnaces and equipment for putting down antireflection coatings." Accordingly, Mlavsky believes that "somewhere between 3 and 4 inches at the narrowest could be optimum." □

Displays

TI's flat CRT is simply a flat CRT

The flat-screen replacement for the cathode-ray tube is being vigorously researched at various laboratories with such approaches as liquid-crystal, electroluminescent, and gas-discharge technologies. But why not just make a flat CRT? Workers at Texas Instruments Inc.'s corporate research lab in Dallas have done just that, building a CRT with a display area of 6 by 8 inches and a depth of

only 2 in. Comparable 10-in.-diagonal tubes used in data terminals have a 12-in. depth.

Two changes make the thin size possible, says William C. Holton, director of the advanced components lab and the group leader on the project. First, the point cathode of the conventional CRT is replaced with an area cathode (an array of closely spaced filament wires). Second, a multilayer control and switching stack is inserted between the cathode and phosphor screen.

The switching stack individually addresses each dot of the five-by-nine-dot matrix making up each of the screen's 1,920 alphanumeric characters. It consists of three layers, each with the five-by-nine hole pattern for the characters repeated 1,920 times. The first enables one horizontal character row at a time, while the second and third enable individual rows and columns of dots in each character. This reduces the number of addressing leads from the 590 typically required for a gas-plasma matrix display to only 108 for this tube, says Holton.

The cathode is actually an array of oxide-coated tungsten filament wires that generate electrons as a directly heated cathode. It takes

somewhat more power than the small cathode in a conventional CRT, Holton says, but the efficiency overall is about the same, since no power is required for deflecting the beam, as it is for the conventional tube with a deflection yoke.

Characters. The present version of the TI tube, which will be described at the upcoming International Electron Devices Meeting in Washington, displays 24 rows of 80 characters each. Although gray scale is achievable with pulse-width modulation of the addressing signals, Holton says the major application appears to be in character displays.

Holton emphasizes that TI's flat CRT is very much a research project. But he notes that most of the effort up until now has been directed toward alphanumeric displays, though video displays are not being ruled out. For such uses, the major problem will be in creating finer-hole geometries for the increased resolution that is required. □


Automotive

Electronics adjusts shocks, smooths ride

As American cars get smaller, can they still provide the good ride familiar with larger ones? Monroe Auto Equipment Co., the shock-absorber manufacturer, thinks it has come up with an electronic sensor that will help them do so.

Monroe's sensor replaces the mechanical height leveler that is installed as an option on about 5% of the full-size cars sold today. But instead of relying on mechanical means to sense the axle-to-body distance, the firm has placed a light-emitting diode and a pair of photo-sensitive resistors inside the air chamber of a standard air-spring shock absorber. Ford Motor Co. and Chrysler Corp. are reported to be testing the system, and General Motors Corp. is offering a similar electronic setup for the first time on 1978-model cars.

Air-spring shock absorbers, which

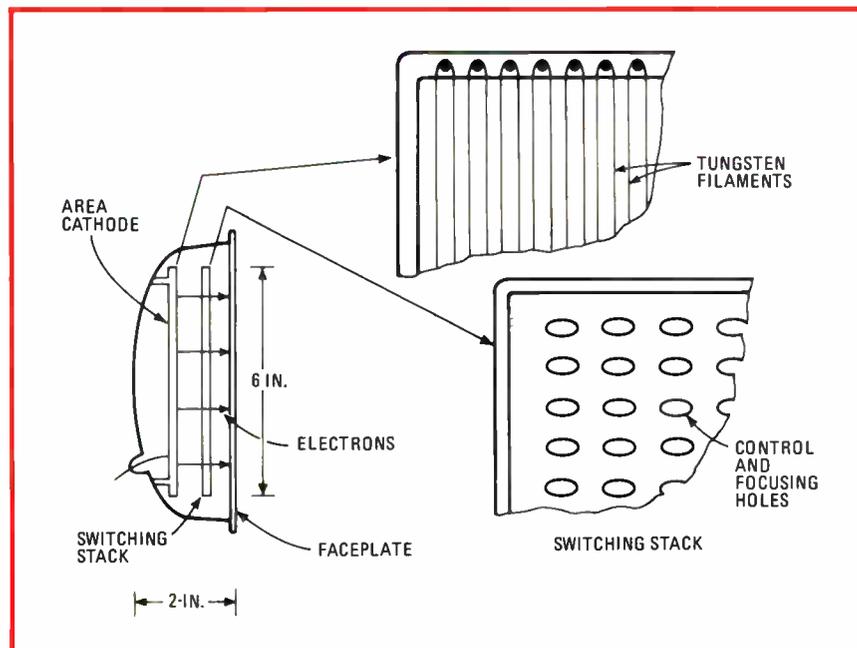

Experimental. Two-inch-deep cathode ray tube has 6-by-8-in. viewing area and relies on electrons created by tungsten filaments that stream through holes in switching stack.

SORENSEN IS THE SOURCE.

FOR TWICE AS MANY OPEN-FRAME POWER SUPPLIES.

Now, Sorensen offers you almost twice as many single outputs, plus new duals, to make your selection of OEM DC power supplies just that much simpler.

Check our features:

- 115/208/230 VAC input standard.
- Made in U.S.A. with quality components.
- Conservatively designed and rated.

- No overshoot with turn-on, turn-off or power failure.
- Low heat dissipation, high temperature stability.
- UL recognition.
- One-year warranty, backed by worldwide service organization.
- Stocked for immediate delivery.


Single Output				Single Output			
Model	Voltage ± 5% adjustable	Output Current (A dc) @ 40°C*	Price	Model	Voltage ± 5% adjustable	Output Current (A dc) @ 40°C*	Price
SOC 2-3	2V	3.0	\$ 35	SOC 15-9.5	15V	9.5	\$113
SOC 2-6	2V	6.0	58	SOC 15-13	15V	13.0	149
SOC 2-10	2V	10.0	72	SOC 24-1.0	24V	1.0	35
SOC 2-18	2V	18.0	113	SOC 24-2.2	24V	2.2	53
SOC 2-25	2V	25.0	149	SOC 24-3.5	24V	3.5	72
SOC 5-3	5V	3.0	35	SOC 24-6.6	24V	6.6	113
SOC 5-6	5V	6.0	58	SOC 24-9	24V	9.0	149
SOC 5-10	5V	10.0	72	SOC 28-0.8	28V	0.8	35
SOC 5-18	5V	18.0	113	SOC 28-2.0	28V	2.0	58
SOC 5-25	5V	25.0	149	SOC 28-3.1	28V	3.1	72
SOC 12-1.6	12V	1.6	35	SOC 28-6	28V	6.0	113
SOC 12-4.0	12V	4.0	58	SOC 28-8	28V	8.0	149
SOC 12-6.0	12V	6.0	72				
SOC 12-11.0	12V	11.0	113	Dual Output			
SOC 12-15.0	12V	15.0	149	SOC 15D-1	12V to 15V	1.0	\$ 50
SOC 15-1.5	15V	1.5	35	SOC 15D-2	12V to 15V	2.0	76
SOC 15-3.0	15V	3.0	58	SOC 15D-4.5	12V to 15V	4.5	115
SOC 15-5.0	15V	5.0	72	SOC 15D-6	12V to 15V	6.0	154

Check our specifications:

AC Input Power: 105-125V, 190-226V, 210-250V (available by using taps on transformer).
Frequency 50 to 63Hz. (Derate I_o 10% at 50Hz.)
Voltage Regulation (comb. line and load): $\pm 0.15\% + 6mV$ for 105 to 125 Vac and 100% load change.
Voltage Ripple and Noise: 1.5mVrms, 5mVpp.
Temperature Coefficient: 0.03% per °C.
Stability (24 hours): 0.2% after 1-hour warm-up.
Remote sensing: 100mV maximum drop in each leg.
Operating Temperature: 0°C to 60°C.
Storage Temperature: -20°C to + 85°C.
Overvoltage Protection: Available on all models except 2 volt. Specify by adding "VP" suffix to model number. Add \$8 to unit prices. (\$12 to unit prices over \$100.)
Current Foldback: Automatic, factory-set to 140% rated (40°C) output current.
Cooling: Convection.
Finish: Black anodize.


Call us for OEM discounts:
(603) 668-4500.

*Free-air rating — no external heatsink.

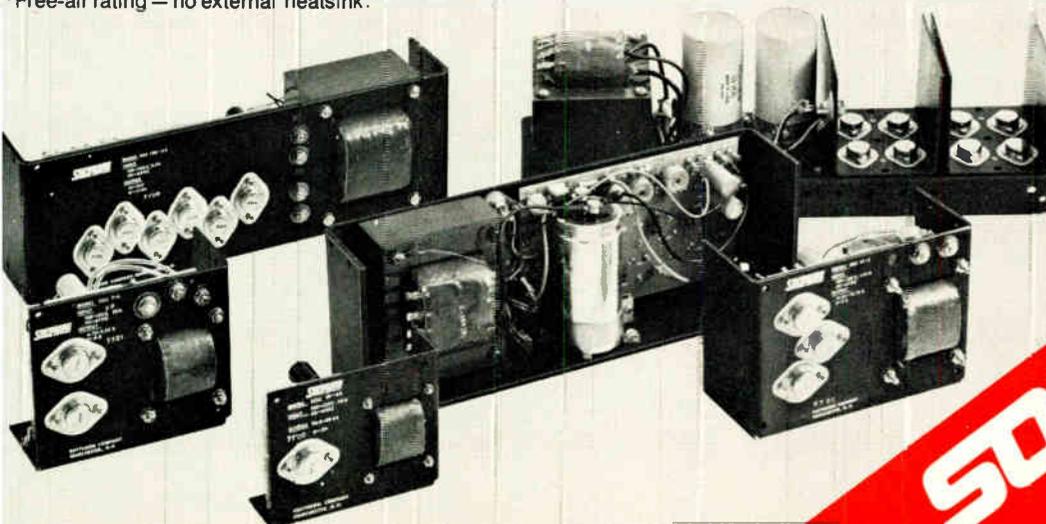

SORENSEN
POWER SUPPLIES

A Raytheon Company

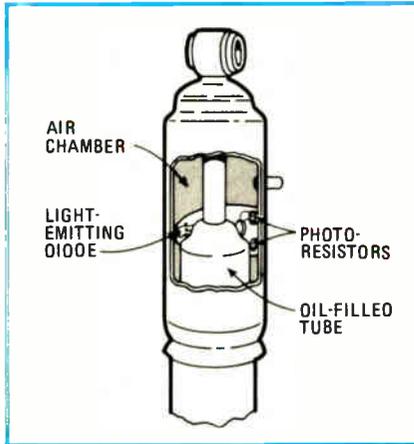

Level sensor. Oil tube is in a position to block light from diode before it strikes photoresistors to help set auto level.

combine the damping function of a piston in an oil-filled reserve tube with an air chamber that acts as a spring, help maintain a constant distance between the rear axle and the body of the car as loads are added. On trucks, such shock absorbers are usually offered with a tire-type valve, and they can be filled with air at a service station after the truck is loaded. Car manufacturers, on the other hand, have added a mechanical leveling valve and air pump to come up with a system that automatically responds to any weight added to the car, preserving the original axle-to-body distance and thus the ride quality.

Replacement. Monroe has simply replaced the mechanical leveler with an optical height sensor and electronic module. Unlike the mechanical device, it can be placed well away from the dirty and hazardous area beneath the car. "The idea of building a height sensor into an air shock isn't new, but previous attempts have been either mechanical or pneumatic and haven't worked out," says Robert W. Hegel, chief engineer for advanced engineering and research at the Monroe, Mich., firm.

In the electronic system, the photoresistors are mounted one above the other on a plastic card that curves around the inside of the air-spring chamber, as shown in the diagram. The card also contains, at the far end of the curved card, the

light-emitting diode, as well as an integral four-terminal connector. Silicone rubber glues the card to the chamber wall and also provides an air-tight seal for the terminals and maintains the spring's 200 pounds per square inch pressure.

Depending on load, the oil-filled tube moves within the air chamber, blocking the LED's light from one, both, or neither of the photoresistors. An electronic module, located under the hood or in the passenger compartment and about the size of a pack of cigarettes, senses the voltage changes in the photoresistors. It contains two standard complementary metal-oxide-semiconductor quad gates and a handful of discretes.

Logically done. "When the logic sees that the resistors are both on, it turns on an air pump to fill the shocks and raise the body; when they're both off, it turns on a solenoid valve that bleeds the shocks," Hegel explains. A simple resistor-capacitor network builds in a 15-to-20-second time delay that blinds the system to normal suspension movements, such as those encountered on curves or when braking for a stop. The desired axle-to-body height can be held to within a quarter inch and is determined by the vertical placement of the photoresistors, which is different for every model car. "We can use off-the-shelf components because we're getting an airtight, light-tight, watertight chamber for nothing," Hegel says.

Monroe is not giving the price of its electronic system, which comes with an electric air compressor, but it should be tagged well under the \$90 to \$120 that the mechanical option now commands. Besides its cost savings, it should prove more reliable, Hegel stresses, because it reduces moving parts and is housed in a relatively benign environment. It also shaves two pounds from the leveling system.

For its electronic leveling system, General Motors' Delco Products division, Dayton, Ohio, opted to package the optical height sensor and electronic circuitry together in a 3-by-4-by-3/4-in. module fastened to

the auto body above the rear axle. Height changes caused by varying loads in the car are translated to a circular motion by a mechanical linkage, and a circular shutter breaks the light path between two LEDs and two phototransistors. Voltage outputs are sensed by a custom p-channel MOS device that also sets a delay before activating the air compressor or exhaust solenoid □

Military


Defense electronics to up budget share

U. S. spending increases for military missiles and space programs will help defense electronics contractors boost their share of U. S. military outlays from 18.2% next year to about 21% in the next decade. That is the latest estimate of the Electronic Industries Association, in a forecast of military spending on electronics through fiscal 1987 for three key Defense Department categories—procurement, operations/maintenance, and research, development, test, and engineering. After discounting an estimated annual inflation rate of 6%, the association sees outlays in those categories rising an average of 3.3% a year, even though the total defense budget grows no more than 1.4% annually.

Cruise missile programs are seen as a major factor in boosting missile electronics outlays to \$3.4 billion in fiscal 1982 from the \$2.3 billion level in fiscal 1977, which ended Sept. 30. Spending will then flatten out at about \$3.5 billion a year as production programs stabilize and development is complete, according to Rockwell International's Wendell A. Johnson, who coordinated the forecast for the EIA.


Development of the advanced intercontinental missile known as M-X, for missile-experimental, depends on the outcome of arms-limitation talks with the Soviet Union, he points out. "But if sizable portions of the future budget are allocated to M-X, the total missile

Our filters are very active.

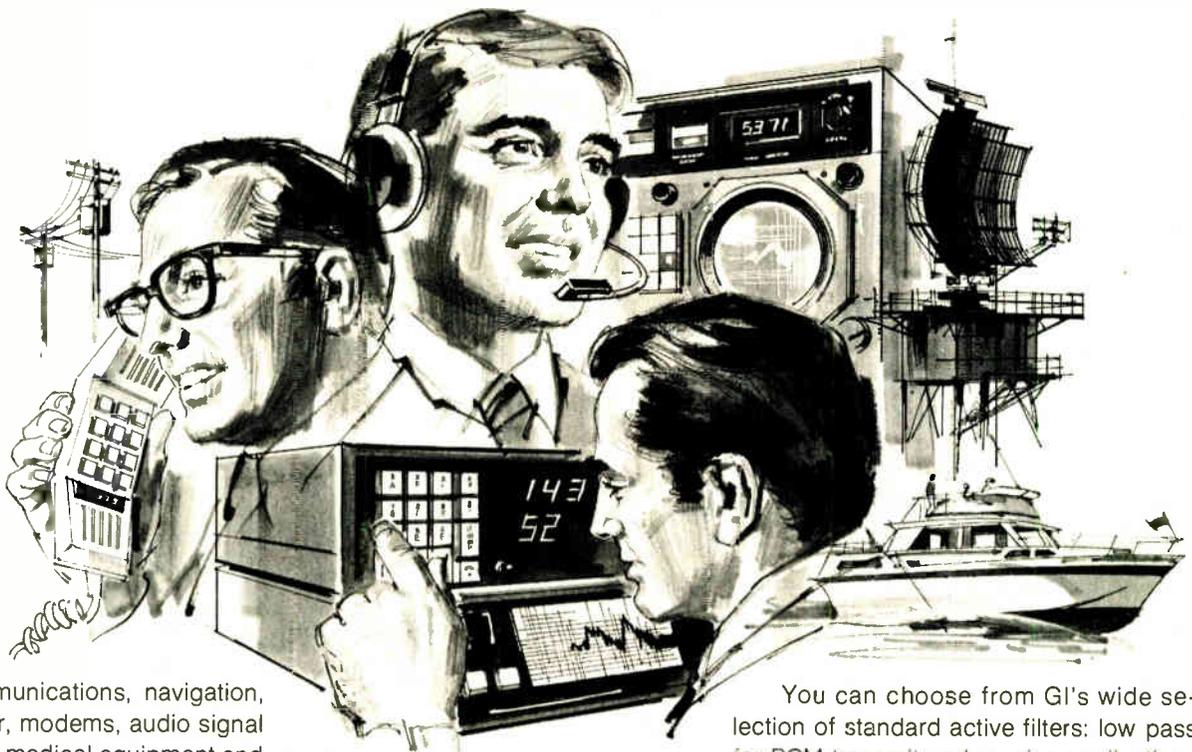

In telecommunications, navigation, radar, sonar, modems, audio signal processing, medical equipment and industrial controls, General Instrument hybrid active filters are busy shaping up frequencies for optimum performance. And most important, GI Microelectronic hybrids are actively saving customers engineering time, PC board space, and production costs.

Low pass, high pass, band pass, band reject or notch response... whatever your filter requirements are, General Instrument can help you bring your product on stream faster and be more competitive. For example, you can choose GI's Universal Active Filters. These low cost units can generate any filter response. They give you independent control of frequency, Q and amplifier gain and you need not spend a lot on external resistors.



You can choose from GI's wide selection of standard active filters: low pass for PCM transmit and receive applications... band pass for signaling and tone receiver applications... and band pass for suppression and separation of DTMF and MF frequencies. Those filters designed for service in telecommunications exceed AT&T specifications. And you can select them in a wide range of packages — DIP, SIP and TO-8.

In addition to helping you save time and costs, GI hybrids are compatible in size with other space-saving LSI devices. Computer-controlled dynamic laser trimming and 100% testing assures reliable performance. What else would you expect from the leader in microcircuit technology? Before you design or buy another active filter, look closely at GI's "very active" hybrids — write today or call General Instrument Microelectronics, 600 West John Street, Hicksville, New York 11802, Telephone: 516-733-3107.

We help you compete.

**GENERAL INSTRUMENT CORPORATION
MICROELECTRONICS**



Waiting for the Energy Department

From the newly formed Department of Energy the message for electronics companies is "wait and see." According to Fred Weinholt, a staff assistant to James Schlesinger, the new energy secretary, the conflict between Congress and President Carter over the nation's energy strategy means that any department action must be put on hold.

He told a seminar on opportunities for electronics companies in the Energy Department at the Electronic Industries Association annual meeting, held in San Francisco this month, that "about all that is certain is that there is an Energy Department and that its responsibility is energy." With a first-year budget of \$10.4 billion, it already has 20,000 employees overseeing a grab bag of responsibilities from such agencies as the Interior Department (power marketing such as the Bonneville Power Administration); the Interstate Commerce Commission (oil rates); Housing and Urban Development (housing energy standards); and the old Federal Energy Administration and the Energy Research and Development Administration.

Although this conglomerate has been reorganized and split into three key divisions—basic research, demonstration, and commercial development—the exact organizational structure has not been worked out yet. "It's no use giving you names, titles and responsibilities," Weinholt says, "because tomorrow it could all be different." Except for Schlesinger and his immediate assistants, top assistant-secretary and administrative jobs have not been permanently filled. "Until the current congressional debate over the energy bill is settled, it's anybody's guess as to when the positions will be permanently filled," he says.

In spite of the organizational uncertainty, there is no shortage of contracting money. The biggest chunk—\$2.8 billion—goes to the new energy technology office for work on solar, geothermal, fossil, magnetic fusion, and nuclear energy.

Under the new system, the energy research office handles basic research. Then the energy technology office will take over once a project has reached demonstration levels. Finally, the resources applications arm will launch a push for commercial development if that seems appropriate.

electronics content will rise drastically" from the projected average of 38.2%, he says.

Countering threats. Acceleration of military space programs to counter new Soviet anti-satellite satellites coupled with enhancement of U. S. reconnaissance capabilities could produce explosive growth in space electronics over the decade. Pentagon outlays are expected to climb, especially in the first half of the 10-year period. They should climb from \$790 million in fiscal 1978 to nearly \$1.2 billion in fiscal 1982 and then remain essentially stable through 1987. The Carter Administration is pressing to hold defense spending down over the near term, so avionics outlays are forecast to slip from the fiscal 1978 high of \$3.32 billion to \$3.17 billion by fiscal 1981. The increases in missile and space electronics spending are expected to offset this decline, also caused by the

completion of much of the R&D for new tactical aircraft, Johnson says. Increases in missile electronics should offset losses caused by this summer's cancellation of Rockwell's B-1 strategic-bomber program.

But Johnson's forecast team sees a revitalization of the military avionics market in fiscal 1982, as a new RDT&E cycle begins for the next generation of warplanes. Outlays will begin climbing slowly, reaching a high of \$4.3 billion in 1987.

On the Navy side, the association forecasts an electronics program that is essentially stable with slight growth, according to Johnson. Efforts to cut military spending could produce a small cutback in the first five years, he points out. But present estimates are that the market will climb from \$1.5 billion in fiscal 1978 to \$2 billion in fiscal 1982 and then grow slowly to a \$2.3 billion peak by the end of the 10-year period. □

Meetings


Midcon show looks like a hit in Chicago

There is now no electronics marketplace as diverse as in the Midwest, yet only five years ago most of its industries had not discovered electronics. To mark these manufacturers' interest, they will have their own electronics show next month in Chicago. Officially, it is called Midcon/77, and one wag has already titled the exhibition "the electronics show for the nonelectronics industries."

All signs point to Midcon's success, a coup for Electrical and Electronics Exhibitions Inc., the organization that runs the Electro and Wescon shows. Like its East Coast and West Coast siblings, Midcon will travel to a different city each year, so EEEI will have almost blanketed the country with alternating, regional electronics shows. Next year, Midcon will bow in Dallas, and tentative plans call for a Chicago encore in 1979 and an Atlanta site in 1980.

Backed by local sections of the Institute of Electrical and Electronics Engineers and the Electronic Representatives Association, EEEI will have succeeded in the heartland market, a geographic and industrial sprawl that has killed off other attempts at electronics shows. This year's Microfair, for example, was a Wema-planned show that did not get off the ground. Chicago's National Electronics Conference, thriving at McCormick Place in the 1960s, dwindled to nothing in 1976, although it returned this month in an abbreviated format without exhibitors.

Electronics manufacturers, however, are backing Midcon resoundingly. Some 220 exhibitors will fill almost 400 booths when the doors open Nov. 8 at the O'Hare Exposition Center in suburban Chicago. While that is not up to Electro 77's 560 booths, or Wescon/77's 687, it is well over Midcon's 250-booth pro-

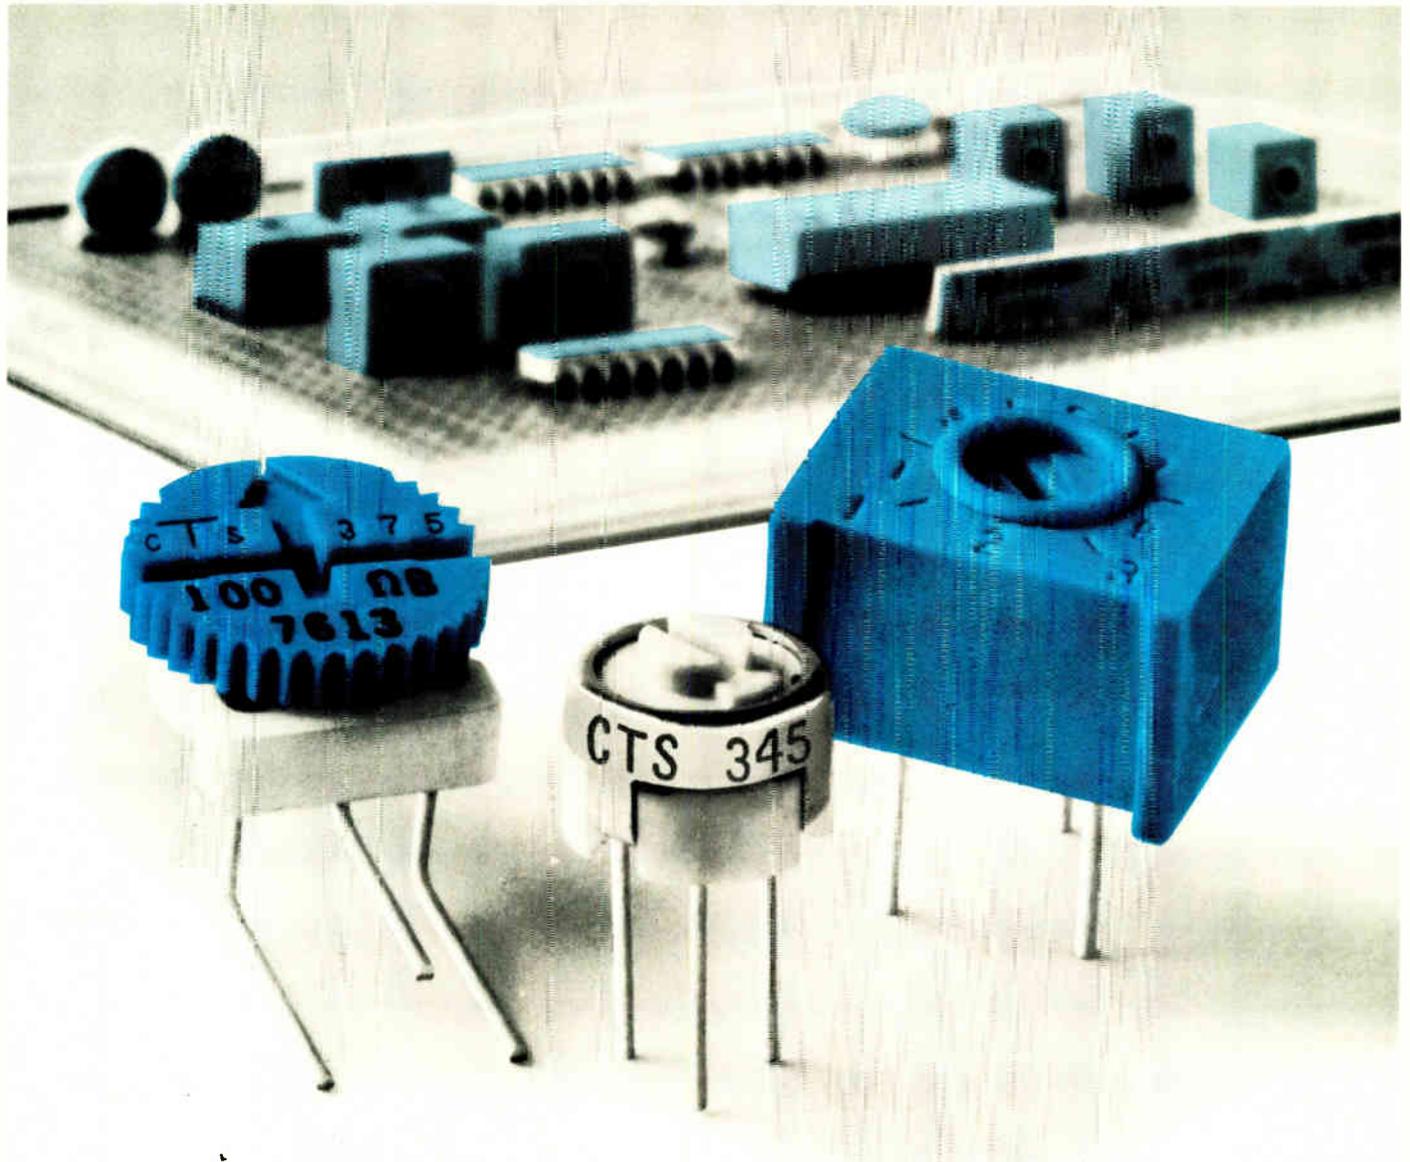

Overspecifying your cermet trimmer needs?

Why use multiturn trimmers when CTS single turns provide settability accuracy of .03%...approaching that of a 20-turn trimmer. Compactness, economy and excellent performance add up to a lot of efficiency in product design. You get all these benefits when you rely on CTS *single turn* cermet trimmers.

For example, the $\frac{3}{8}$ " diameter Series 375 is available in six popular terminal styles. And they're priced as low as 25¢ each in production quantities.

The CTS Series 345 is a "mini" $\frac{1}{4}$ " round design featuring low .180" profile, sealed construction and production priced at just 70¢ each.

The $\frac{7}{16}$ " square Series 360 satisfies a wide range of critical OEM applications. Eleven popular grid spacings include both top and side adjust .100", .125", .150" and TO-5 centers. Low priced, too. Under 40¢ each in production quantities.

All available off the shelf from CTS Industrial Distributors. CTS single turns handle nearly every trimmer application...economically! You be the judge. Call for your *Free Sample*. CTS of West Liberty, Inc., 6800 County Road, West Liberty, Ohio 43357. Phone (513) 465-3030.

CTS CORPORATION

A world leader in cermet and variable resistor technology.



jection. Also it bucks the wait-and-see attitude of manufacturers that prevails at most new shows and is robust support for a show announced in February, after many firms had already decided where to spend their show money for the year. Attendance at the three-day affair should hit 15,000, officials estimate.

A whopping attendance, of course, is what exhibitors demand from any show, and the technical program is a major attraction for many people. Midcon has marshaled 30 technical sessions, to be housed at the neighboring Hyatt Regency O'Hare Hotel, which it hopes reflect the personality of the show's 400-mile radius.

Starring part. Fully a third of the program deals exclusively with the microprocessor, the component that has brought Midwestern manufacturers of such diverse equipment as automobiles, appliances, farm equipment, machine tools, pin-ball machines, and steel into the electronics business. Reflecting the problem of applying electronics to electromechanical gear, the sessions stress microprocessor interfacing and peripherals rather than architecture and memory.

Other sessions are devoted to process control, automotive electronics, and satellite-based remote earth sensing, for example. The program also lists four sessions on various communications topics, a pair on medical electronics, and a grab bag of others that range from advanced battery systems to product liability. Kicking off Midcon is a day-long marketing workshop pointed toward distributors and manufacturers' representatives, often the key marketing force pushing electronic technology at the industrial manufacturer.

The technical program may spell success or failure for the convention, but Midcon already boasts a number of exhibitors that have not been showing at either Wescon or Electro. These include Signetics, Macrodata Corp., Texas Instruments' Industrial Controls department, and NCR's Microelectronics division. More important, EEEI has already started signing up exhibitors for the December 1978 Dallas version, using an Electro-

News briefs

English acquire Dana Laboratories

Dana Laboratories Inc., Irvine, Calif., a leading U. S. maker of digital voltmeters and electronic counter-timers, has been acquired for \$3.5 million by England's Racal Electronics Ltd. Dana will be combined with Racal Instruments Ltd., to form Racal-Dana Instruments Inc., headed in the U. S. by Webb Scroggin, Dana Labs' president. Earlier this year, a Racal company acquired Milgo Electronic Corp., Miami, Fla., in the data communications field. Dana Labs' old parent, Dana Electronics Inc., Newport Beach, Calif., retains its other primary subsidiaries, EIP Inc. and Cushman Electronics Inc.

ITT Semiconductors closing Florida site

Because of losses incurred in the manufacture of military high-reliability and certain other integrated-circuit lines, ITT Semiconductors is closing its U. S. division's wafer fabrication facility in West Palm Beach, Fla. The closure, with the loss of 300 jobs, will be completed early next year. The company will transfer production of its commercial bipolar and linear IC lines to a newly leased 160,000-square-foot plant in Lawrence, Mass., adjacent to its present discrete semiconductor production facility.

Physicist gains recognition as "Father of the Laser"

The U. S. Patent Office has granted Gordon Gould a patent for his invention of "optically pumped laser amplifiers." Says Eugene Lang, president of REFAC Technology Corp., which owns licensing rights to the patent and all future laser-related patents of Gould, "all lasers that employ optically pumped amplification will be deemed to fall within the scope of Gould's patent." REFAC is offering nonexclusive licenses to companies whose laser activities are considered subject to the patent, No. 4,053,845.

Zenith sets further cutback of U. S. operations

Further cutting back its domestic operations to maintain profitability, Zenith Radio Corp. will sell its hearing aid business later this month to Zenetron Inc. The firm was organized to take over the division by F. William Carr, oil and gas investor in Texas, and James H. Johnson, who ran the division from 1971 to 1975. Zenith, which pioneered the miniaturization of hearing aids and batteries, has had annual hearing aid sales of about \$15 million. The firm earlier announced plans to move extensive parts of its color television operations offshore [*Electronics*, Oct. 13, p. 69].

FCC expects flood of interconnect registrations in November


The Federal Communications Commission expects to be inundated in November by applications from foreign and domestic manufacturers to register terminal equipment for direct connection to the nation's telephone network. The FCC opened the flood gates when it said its registration program became "effective immediately" following the U. S. Supreme Court ruling early this month upholding interconnection without the need for carrier-supplied protective couplers [*Electronics*, Oct. 13, p. 38]. To ease its burden, the FCC has published a new consolidated list of grandfathered terminal equipment that need not be registered if connected by Jan. 1, 1978. Equipment of these types must have been directly connected to the network in accordance with telephone company tariffs before May 1, 1976, and be able to function standing alone.

Expansion of CB service to 224-225 MHz rejected by FCC

A proposal to expand citizens' band radio frequencies to include 224 - 225 MHz has been rejected by the FCC as obsolete. The 1973 petition for the new Class E service was made by the Electronic Industries Association for CB and land-mobile radio manufacturers as a means of relief from crowded channels and high equipment costs. The fact that it took the FCC four years to reach a conclusion was blasted by the EIA, which labeled the ruling "a serious mistake" but said it plans no appeal at this time.

Now... the Coolest Fastest Biggest Bipolar Multipliers you can buy

*feature MIL chips in commercial temperature ranges
(at no increase in price)*

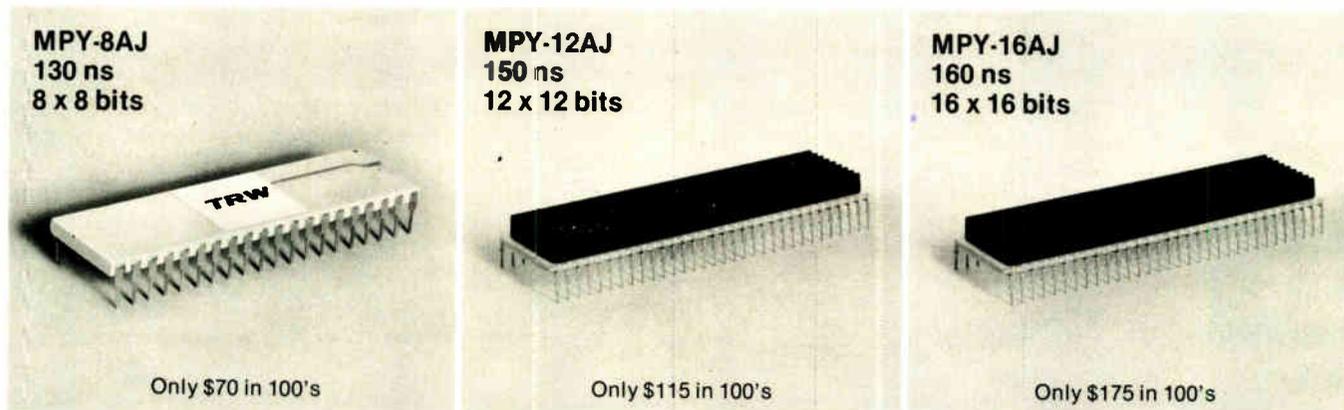

We've cut out all excess power... to offer you MIL chip reliability and performance in commercial temperature range parts. Consider these advantages for Digital Signal Processing:

- low power
- no air flow requirement (0°C to 70°C in still air)
- high reliability (for example a recent test indicated an MTBF greater than 200 years at max. oper. temp.)
- reduced output delay

No increase in price! A great increase in reliability! We have the details in our new reliability brochure. For your copy, send the coupon today. Or you can call us at (213) 535-1831.

TRW LSI Products

An Electronic Components Division of TRW, Inc.
P.O. Box 1125
Redondo Beach, CA 90278

Please send Reliability Brochure and updated data on your "cool" Multipliers.

NAME _____

COMPANY _____

DIV/DEPT _____ MAIL CODE _____


ADDRESS _____

CITY _____

STATE _____ ZIP _____ E-10

TRW LSI PRODUCTS


For Digital Signal Processing

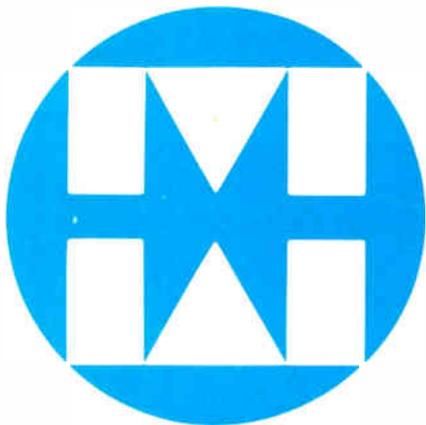

MITEL

MILITARY OR COMMERCIAL ANALOG SWITCH

CMOS ANALOG SWITCHES FOR MANY APPLICATIONS — CROSS-POINT, ANALOG-TO-DIGITAL AND DIGITAL-TO-ANALOG CONVERSION, ANALOG OR DIGITAL MIXING, TRANSMISSION GATING, ETC.

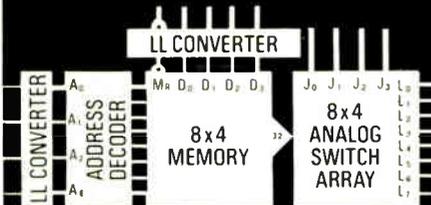

MT8804B CMOS/LSI 8804B 8 x 4 ANALOG SWITCH ARRAY

FEATURING:

- TO 18v, ± 9v PEAK DIGITAL AND ANALOG SIGNAL LEVELS
- 50Ω "ON" RESISTANCE OF SWITCHES (TYP.)
- 5Ω BETWEEN "ON" VALUES OF SWITCHES (TYP.)
- -50db CROSSTALK AT F_{IS} = 1 MHz BETWEEN SWITCHES
- 85 db "ON OFF" OUTPUT VOLTAGE RATIO (TYP.)
- LESS THAN 0.5% DISTORTION AT F_{IS} = 1 KHz
- MASTER RESET OF CONTROL MEMORY

OTHER CMOS ANALOG SWITCHES INCLUDE:

- MD4016B — QUAD BILATERAL ANALOG SWITCH/TRANSMISSION GATE
- MD4066B — QUAD BILATERAL ANALOG SWITCH/TRANSMISSION GATE
- MD4051B — 8-CHANNEL ANALOG MULTIPLEXER/DEMULTIPLEXER
- MD4052B — DIFFERENTIAL 4-CHANNEL ANALOG MULTIPLEXER/DEMULTIPLEXER
- MD4053B — TRIPLE 2-CHANNEL ANALOG MULTIPLEXER/DEMULTIPLEXER

For more information write or phone

18 AIRPORT BLVD.
BROMONT, QUEBEC, CANADA
JOE ILO
(514) 534-2321
TLX. 05-267474



MITEL

Semiconductor

Electronics review

Midcon-Wescon three-show alternate-city package that allows an electronics manufacturer to cover 80% of its market by attending the regional shows for two years. □

Solid state

Heat pipes added to power devices

A new word hit the power-semiconductor marketplace earlier this month. The word is transcendent, a Latin derivative meaning permeable to heat, and it is being applied by RCA Corp.'s Electro-Optics and Devices division, Lancaster, Pa., to a new family of power devices.

Samples. The devices include 250-ampere rectifiers with blocking voltages of 1,200 volts, 100-A transistors with voltages to 800 v, and 400-A thyristors. RCA is finally supplying samples after development that goes back at least to a 1972 contract from the U.S. Army Mobility Equipment Research and Development Command, Fort Belvoir, Va. Initial applications will be military, in ground-based power conditioning, for example, as well as in airborne electrical systems, motor speed control, and radar power supplies now served by "hockey-puck" and stud-mounted devices.

The high-power semiconductor-device market is now pegged at an annual \$40 million and could grow to \$120 million in five years, according to division vice president Ralph E. Simon. Prices for the RCA parts right now are just as hefty as the devices' ratings, ranging from

\$1,125 for the rectifier to \$1,825 for the transistor in small quantities.

Unlike conventional devices that add bulky heat sinks and heat-dissipating fins externally, RCA bonds one end of the heat pipe directly to the wafer surface and then adds fins to the other end. Water in the sealed pipe absorbs heat from the wafer and gives it up to the fins. The results are power devices a quarter the size and 15% the weight of existing units of equivalent rating, says Simon. For example, the 250-A rectifier weighs 12 ounces and occupies less than 14 cubic inches; the 100-A transistor dissipates 500 w, weighs under 2 pounds and occupies less than 70 in.³.

By this time next year, Simon expects to be making preproduction quantities and the prices to range from \$400 to \$800. Full production is three years away.


Westinghouse Corp.'s Semiconductor division in Youngwood, Ohio, a major supplier of hockey-puck and stud-mounted devices, "is not doing anything similar to transcendent devices," says marketing manager Stan Hunt.

Earlier this month, Westinghouse unveiled a new line of disk-type devices with new heat-sink designs that it says can handle 50% more power than earlier designs. As for General Electric Co.'s Semiconductor Products department in Syracuse, N. Y., it is studying heat pipes but has developed nothing yet. □

Fiber optics

Plastic cable works well in infrared

Most fiber-optic systems today employ silica-based fibers because they are good transmitters of light in the near-infrared spectrum, and it is in this area that light sources and detectors are most highly developed. But now, E. I. du Pont de Nemours & Co. has developed an all-plastic fiber cable that looks like it could take over from its silica counterpart at least in optoelectronic systems

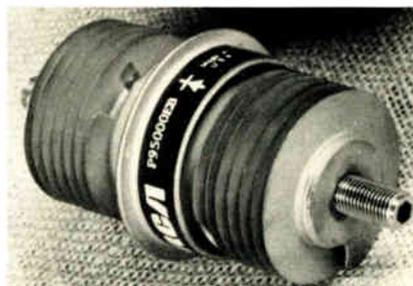

Heat-piped. RCA's 250-ampere rectifier weighs 12 ounces, occupies less than 14 in.³

MICROCOMPUTER USERS.


Single Board Real Time Analog I/O Systems ...Widest Selection, Fast Turnaround, Lowest PRICES

Single Board Analog I/O Systems		DT11761	DT11762	DT11763	DT11764	DT11765	DT11751	DT11741	DT11742	DT11733	DT11734	DT11735	DT11841	DT11842	DT11843	DT11731	DT11732	DT11733	DT11734	DT11722	DT11723	DT11791	DT11795	DT11781	DT11782	DT11784	DT11785	
Analog Inputs	16 channels																											
	32 channels																											
	64 channels																											
	10mV to 10V range																											
	0 to 10V, ±10V, ±5V ranges																											
	1 to 5V (4 to 20mA) range																											
Analog Outputs	8 bit resolution																											
	12 bit resolution																											
	2 channels																											
	4 channels																											
	8 channels																											
	0 to 10V, ±10V, ±5V ranges																											
Features	4 to 20mA range																											
	point plotting																											
	8 bit resolution																											
	12 bit resolution																											
	programmable gain																											
100KHz throughput																												
program I/O & interrupt																												
DMA interface																												
power required: +5V only																												

These single board systems provide the most cost effective and fastest way to get analog signals into and out of your micro-computer. Just plug in the board and hook-up your analog signals. Get a headstart on solving your system's problems without the headaches of designing an analog front end.



We've got the broadest selection of input and output capability—10mV to 10V or 4-20mA inputs, up to 64 channels on a single board, line amplified buffered D/A outputs, point plotting, or 4-20mA outputs—all at a cost that says you can't afford to do it yourself.



Concentrate on the software and other key system requirements... and let us take care of your analog problems. We've seen them all and solved them in these systems...no mysteries, no tweaking.

Prices are surprisingly low, with 8-bit models starting at \$295 and 12-bit models at \$395 both in OEM quantity.

Send for full technical data or call us.


DATA TRANSLATION INC

23 Strathmore Rd., Natick MA 01760
(617) 655-5300 Telex 94-8474

SALES OFFICES: AZ, Scottsdale 602-994-5400; CA, Cupertino 408-257-5131; CA, Santa Ana 714-540-3245; CO, Denver 303-837-1247; IA, Cedar Rapids 319-362-0503; KS, Prairie Village 913-649-4000; MD, Fulton 301-953-3724; MA, Natick 617-655-5300; MO, St. Louis 314-997-1515; NJ, Parlin 201-727-6454; NM, Albuquerque 505-292-1212; NM, Las Cruces 505-523-0601; NY, Rochester 716-334-2445; UT, Salt Lake City 801-466-6522; VA, Arlington 703-527-3262; WA, Bellevue 206-455-1246.

Circle 51 on reader service card

the Chip
makes
the difference
in...

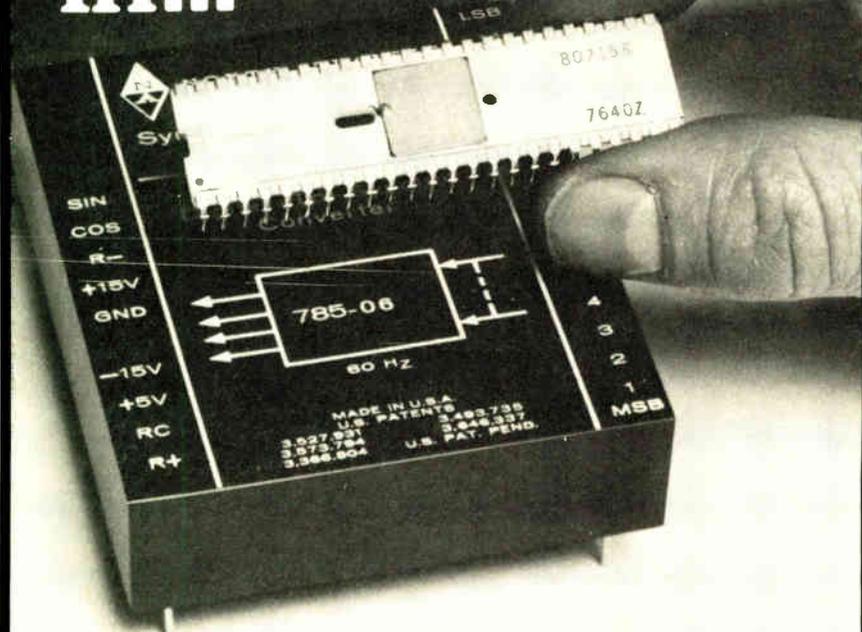

**NORTH ATLANTIC
SYNCHRO CONVERTERS**
with LSI's and 100 hour burn-in

- high reliability • best dependability
- low rate of return.

LSI/85 SYNCHRO TO DIGITAL

10, 12 or 14 bits
4-minute accuracy at
3600°/second
All standard Synchros and
Resolvers
Type II Tracking –
no velocity lag

785 DIGITAL TO SYNCHRO

Full 1.25 VA output at 60
and 400Hz
10, 12 or 14 bits
Slow speed 4000°/second
4-minute accuracy under
full load
All standard Synchros and
Resolvers

**CALL OR WRITE FOR
COMPLETE SPECIFICATIONS.**



NORTH ATLANTIC
industries, inc.

200 TERMINAL DRIVE, PLAINVIEW, NEW YORK 11803
cable: noatlantic / twx: 510-221-1879 / phone: (516) 681-8600

that require short cable runs.

The advantages of plastic over glass hold just as true for fiber-optic cable as they do in the everyday consumer world: plastic more easily withstands stresses of pulling and bending. The cable loss—340 decibels per kilometer—is still higher than that of glass fibers. But Kenneth Kamm, marketing specialist at du Pont's Plastics Department in Wilmington, Del., says the plastic cable (called the series PFX-PIR) could find a niche in computer, office-machine, and industrial control equipment, wherever less than 100 meters of cable is required. At these lengths, a 50-megabit-per-second data rate is possible, and the transmission loss would be quite tolerable, he maintains. Another advantage is that the larger diameter of the core of the plastic fibers couple light from the IR source more efficiently than does silica cable.

Light limit. Previously, plastic fiber-optic cables were limited to transmission chores in the visible-light region. At the longer infrared wavelengths the vibrations of carbon-hydrogen bonds occurring in the plastic bulk materials caused very high transmission losses—around 900 decibels per kilometer. This loss mechanism is similar to that experienced in silica-core fibers caused by oxygen-hydrogen bonds. "Since plastic-bulk material consists essentially of carbon-hydrogen bonds, it was difficult to circumvent," Kamm says. "But we finally found a way to replace hydrogen with deuterium so that the resulting carbon-deuterium bond vibrations caused much less attenuation at the longer infrared wavelengths."

He says that the single-fiber PFX-PIR cables are just going on the market at a price of \$2.25 per meter. Light sources would be a problem, he concedes, because the plastic operates best at 780 nanometers, whereas most conventional gallium-aluminum-arsenide lasers and light-emitting diodes are at the longer 820 nm. However, he believes sources could be tailored to the higher frequency simply by upping the concentration of aluminum. □

The complete \$795 graphics plotter.


It's self contained, plots 8,192 dots per second, and is priced thousands of dollars less than others.



They said it couldn't be done!

Recently, we introduced the EX-800, a complete 80 character line printer for just \$655. Now meet the Axiom EX-810 graphics plotter, our printer's younger and smarter brother, incredibly priced at \$795!

"You can't build a plotter for \$795," we were told. But we have. Using the same simple, reliable marriage of mechanics and electronics that made our printer an instant success.

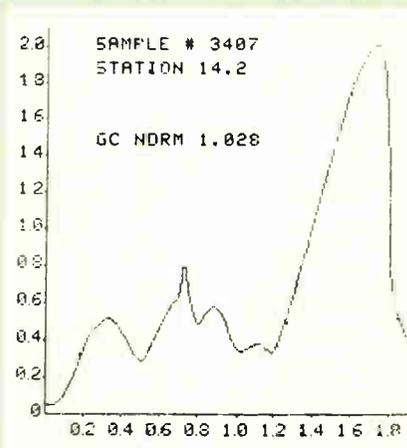

Plots fast — and prints, too

The EX-810 is a compact, self-contained unit, designed to work with microcomputer systems. It can

print 8,192 dots per second with up to 512 dots per row. Under software control, the EX-810 can also function as an 80 column alphanumeric line printer with speeds up to 160 cps.

The plotter has been designed to be driven by an 8-bit microprocessor with a minimum of software overhead. The built-in TTL compatible controller takes care of all of the timing functions required to drive the printhead and advance the printer.

The advantage of electrosensitive plotting

Electrosensitive plotting is the key to the high performance and low cost of the EX-810, because this technique is the simplest possible way to place a visible mark on paper.

The advantages are many. The permanence of the hardcopy, unaffected by sunlight, moisture, heat or age. The shelf-life is indefinite, and the high contrast makes excellent photocopies. Also,

the paper is inexpensive, and readily available, costing less than 1¢ per plot.

Lightweight and rugged

Designed for the OEM, the EX-810, which can print forms, tickets, maps, pictures, charts, logos or anything you want, is completely self-contained including case, power supply, and paper roll holder. Weighing in at 12 lbs., the plotter is only 9 $\frac{5}{8}$ " wide, 3 $\frac{7}{8}$ " high and 10 $\frac{7}{8}$ " deep.

The EX-810 is virtually maintenance free, too. The simple, non-impact print mechanism has an amazing MTBF of 11.6 million lines, and the print-head is self-adjusting. Also, there are no inky ribbons to change.

The EX-810 graphics plotter ushers in a new era. Phone or write for OEM prices today.

Send to **AXIOM**
5932 San Fernando Rd.
Glendale, CA 91202

Urgent. Please phone me at ext _____

Have rep contact me

I'd like a demonstration

Send lit including sample plot

Send EX-800 printer info

Name _____

Company _____

Dept _____

Address _____

City _____ State _____

Zip _____ Telephone _____

AXIOM

AXIOM CORPORATION

5932 San Fernando Rd., Glendale, CA 91202 • (213) 245-9244 • TWX 910-497-2283

If this ad doesn't convert you, we don't know what will.

WHEN RAN THERE'S A THEY DIDN'T

In fact, there are several.

A/D CONVERTERS

	Motorola MC14433	National ADD3501	Intersil 7106/7
Accuracy: 0° to +70°C	No Spec	± 1 count max	± 1 count max
Power Supplies Required:	2	1 (+ 5V)	1 (+5V to +9V)
Additional IC's required:	4	2	0
LCD Compatible	No	No	Yes
System Cost:	Higher	Lower	Lowest
Price @ 100 pcs:	\$9.97	\$9.95	\$9.25
All Display drives on chip:	No	No	Yes
Floating Differential Input:	No	No	Yes
Floating Reference:	No	No	Yes

DELIVERY. If price and performance aren't your only criteria, think about this: Intersil is shipping the ICL 7106 and 7107. Now.

ONE CHIP. LED or LCD. Intersil offers you one chip simplicity. Now. And a whole family of

A/D, D/A converters that mean you can stop beating the bushes for your converter needs.


DRIVES LCD DISPLAYS. Requires no active external components. Includes back plane drive circuitry.

ARIZONA—Liberty Electronics, Kierulff Electronics. CALIFORNIA—Elmar Electronics, Intermark Electronics Inc., Kierulff Electronics, Liberty Electronics, Schweber Electronics. COLORADO—Century Electronics, Elmar Electronics, Kierulff Electronics. CONNECTICUT—Arrow Electronics, Schweber Electronics. FLORIDA—Arrow Electronics, Diplomat/Southland, Inc., Schweber

Electronics. GEORGIA—Arrow Electronics, Schweber Electronics. ILLINOIS—Schweber Electronics, Kierulff Electronics. INDIANA—Advent Electronics, Inc., Sheridan Associates. MARYLAND—Arrow Electronics, Schweber Electronics. MASSACHUSETTS—Arrow Electronics, Kierulff Electronics, Schweber Electronics. MICHIGAN—Schweber Electronics, Sheridan Sales. MINNESOTA—Arrow

Electronics, Schweber Electronics. MISSOURI—LCOMP. NEW JERSEY—Arrow Electronics, Diplomat IPC, Corp., Schweber Electronics. NEW HAMPSHIRE—Arrow Electronics. NEW MEXICO—Century Electronics. NEW YORK—Arrow Electronics, Components Plus, Harvey Federal Electronics, Schweber Electronics. NORTH CAROLINA—RESCO. OHIO—Arrow Electronics, Schweber

NATIONAL THIS AD, REASON MENTION US.

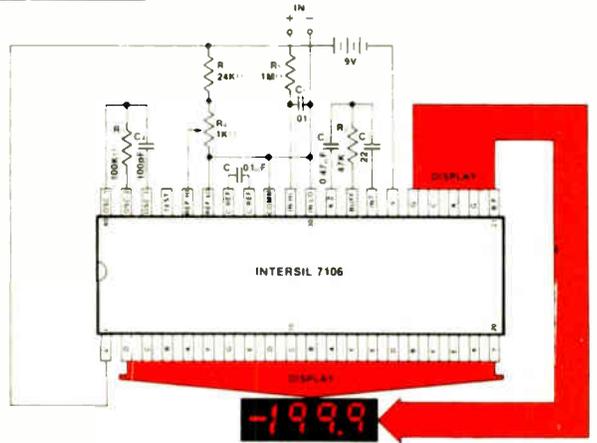

TRUE DUAL SLOPE. The ICL 7106 and 7107 are true dual slope... rather than pulse width modulation or digital auto-zero. When, consider Intersil's better noise rejection and true integration of input signal. And they can handle differential inputs from 200mV to 2.000V full scale.

1/2 DIGIT ACCURACY. Other Intersil IC, 8052A/7103A, offer 20,000 count accuracy with immediate availability.

THEIR AD SAID: "The new monolithic A/D from National. Hello reliability. Hello less cost. Goodbye Motorola"

YOUR AD SAYS: Goodbye National.

HERE'S HOW WE MAKE IT STICK: Prototype a working DPM for either \$24.95 (LED), or \$29.95 (LCD). With our prototyping kits. Just send your check or P.O. to your local Intersil Distributor with the coupon below.



Electronics, Sheridan Associates, Sheridan Sales. OKLAHOMA - Component Specialties. PENNSYLVANIA - Schweber Electronics, Sheridan Sales. TEXAS - Component Specialties, Schweber Electronics. UTAH - Century Electronics. WASHINGTON - Kierulff Electronics, Liberty Electronics. WISCONSIN - Arrow Electronics. CANADA - CESCO, A.E. Ind. Elect. Ltd., Zentronics Ltd.

Circle 55 on reader service card

INTERSIL

10710 North Tantau Avenue
Cupertino, California 95014, U.S.A.
Telephone: (408) 996-5000


You're talking tough. Here's your chance to prove it. Send me:

- Prototyping Kit #ICL 7106EV (LCD) \$29.95 complete.
 - Prototyping Kit #ICL 7107EV (LED) \$24.95 complete.
 - I believe you, send your App. Note: #A016, A017, A018, A023 and 7106/7107 D.S.
- I've enclosed a check, Purchase Order.

Name _____
Company _____
Address _____
City _____ State _____ Zip _____
Country _____

World Radio History

(If outside the United States)





'SWITCHER' OUTPUT FILTER CAPACITORS THAT REALLY PUT OUT

If you're working with switching-type power supplies, you'll want to know about new electrolytic capacitors featuring low equivalent series resistance (for example, 3 mΩ @ 57,000 μF/7.5V) and low internal inductance. Type 622D EXTRALYTIC® Capacitors are the first of their type to meet the power supply designer's need to know, for worst case design, the maximum and minimum ESR of a capacitor, as well as the need to hold the nominal ESR to a tolerance of ±30% at 20 kHz. To simplify calculations for the



equipment designer, Type 622D capacitors have a symmetrical capacitance tolerance of a tight ±20% instead of the wide asymmetrical tolerance customarily associated with low-voltage electrolytic capacitors. These new capacitors are designed for operation over the wide temperature range of -55°C to +85°C. They are furnished in a 1 3/8" diameter case with lengths ranging from 2 1/8" to 5 5/8". Capacitance values from 2,800 to 67,000 μF are available as standard, and voltage ratings range from 5 to 55 WVDC.

For complete technical data, write for Engineering Bulletin 3459 to: Technical Literature Service, Sprague Electric Company, 35 Marshall Street, North Adams, Mass. 01247.

THE BROAD-LINE PRODUCER OF ELECTRONIC PARTS



4SE-7128

Navy to buy X-band satcom ship terminals . . .

The Naval Electronic Systems Command wants to buy **up to two dozen shipboard X-band satellite communications terminals** based on a new Naval Research Laboratory prototype and is calling for production proposals from industry. The classified Interim High Data Rate Terminals will be used with the defense satellite communications system spacecraft known as DSCS-2 for ship-to-shore communications. Using an estimated \$1.5 million in Navelex funds, an NRL team developed the first of the X-band terminals in 18 months—3 months ahead of schedule—with industry subcontractors. The first terminal, described as compact, reliable, and produced at drastically reduced cost, has been installed on a small, university-owned oceanographic research vessel and operating for about a month with the satcom satellite system.

. . . Harris Corp. seen as contender for new NRL system

One sure bidder for the IHDRT production award, say industry officials, is Harris Corp., Melbourne, Fla., which assembled the NRL terminal and also supplied the system's up- and down-converters and modem. The modular system transmits digital pulse-shift-key signals in the 7.9-to-8.4-GHZ band and receives at 7.25 to 7.7 GHz. Data rate is classified.

Sharp cost reductions of up to 80% for some components were achieved **by integration of the modules at the subassembly level**, according to the NRL team headed by Charles Stillings. Team member Philemon Johnson says, for example, that the cost of the integrated high-power amplifier produced by ITT Corp., Nutley, N. J., was cut to 20% that of earlier units using subassembly integration. The ITT unit incorporates a Raytheon Co. driver for intermediate power amplification and a klystron tube and output assembly produced by two separate units of Varian Associates. Other major modules include an AN/URQ-23 frequency standard from Frequency Electronics Inc., New Hyde Park, N.Y.; antenna and power amplifier by Datron Systems Inc., Chatsworth, Calif., plus a digital servo controller to be delivered by the Naval Ocean Systems Center, San Diego.

Lockheed picks CDC's UYK-25 computer for strike system

Lockheed Missiles & Space Co. has picked Control Data Corp.'s AN/UYK-25 computer over Sperry Univac's AN/UYK-7 for the Air Force Precision Location/Strike System (PLSS). Prime contractor Lockheed, which received \$120.3 million in June for full-scale development of one preoperational PLSS system, **awarded CDC's Aerospace division an initial \$7.8 million subcontract**. The Lockheed PLSS is designed for tactical use against air defense systems, intercepting electromagnetic emissions from enemy detection and guidance radars used to control anti-aircraft artillery and surface-to-air missiles. The UYK-25 computers, housed in a ground-based central processing center, will process intercepted emissions and feed location information to tactical control centers for air strike planning.

The PLSS computers will each have 11 core memory banks of 65,000 32-bit words with a 1.2-microsecond cycle time. All of the memories can be on line and accessed simultaneously, CDC says. The computers also will have four processors and two input/output units, plus a central processor with its own memory and I/O controller.

Three electronic materials tests set for space shuttle

Three of the first five materials-processing experiments to be packaged and flown on one of the early orbital flight tests of the space shuttle in 1979 will involve electronic technologies, according to the National Aeronautics and Space Administration. Called the Materials Experiment Assembly, the package of experiments was chosen by NASA's Marshall Space Flight Center, Huntsville, Ala., because it could be **automated and unattended in a self-contained unit** with its own power source and a minicomputer to collect data.

The electronics-oriented experiments and their principal investigators are: vapor growth of alloy-type semiconductor crystals by Herbert Wiedemeier, Rennselaer Polytechnic Institute, Troy, N. Y.; containerless preparation of advanced optical glasses by Ralph Happe, Rockwell International, Downey, Calif.; and performance of solid electrolytes containing dispersed particles by J. Bruce Wagner Jr. of Arizona State University, Tempe.

TDMA terminals complete flight tests at Boeing

The massive triservice digital communications network known as JTIDS—for Joint Tactical Information Distribution Systems—moved one more step forward in development with Boeing Aerospace Co.'s completion of flight tests of the program's time-division multiple-access (TDMA) system one month ahead of schedule. **Terminals were installed aboard an E-3A Airborne Warning and Control System aircraft**—Awacs is the first scheduled military user of TDMA—and an Air Force NKC-135 test aircraft. The two planes communicated between themselves and two Boeing ground terminals in engineering and evaluation tests begun late in June to qualify the new communications link. A second set of flight tests is set for the spring of 1978 using a TDMA terminal with an advanced waveform now being developed.

Hughes Aircraft Co.'s Ground Systems division designed and built the basic terminal equipment now in integration testing at Boeing. The Air Force, which is managing JTIDS for triservice use, is developing other TDMA terminals for use by fighter aircraft, field soldier manpacks, and command and control centers. JTIDS will permit up to 1,000 users to exchange information securely over a single jam-resistant channel with traffic flow automatically controlled by built-in system clocks. Security and jam resistance are achieved by spread-spectrum modulation and built-in cryptographic techniques.

Europe to provide camera, solar array for space telescope

The European Space Agency will supply NASA with the faint-object camera and the spacecraft solar power array for the space telescope mission. Scheduled to be placed in a 310-mile orbit in 1983 by the space shuttle, the 10-ton cylindrical observatory will study the universe **with much higher resolution than has ever been possible before.**

Under the mid-October agreement between NASA and its European counterpart, the camera and its associated photon-counting detector will provide high-resolution imagery from the 1,000-to-3,000 angstrom ultraviolet region through the visual portion of the spectrum to the near-infrared. The camera will be able to separate objects less than $\frac{1}{10}$ of second of arc apart and observe remote celestial objects that are nearly 100 times fainter than those observable during its projected 10-year lifetime. In return for its participation, ESA astronomers will be allocated 15% of the telescope's observation time.

Here in Wabash

**James Pobst can sell his eggs for less
because he grows his own feed.**


We make relays the same way - sort of.

We make our own switches. That not only helps lower the cost of our relays, it does something else that's important.

Since James Pobst knows what's gone into his chickens, he knows what kind of eggs he's going to get. Same way with us. We know what our relays with our switches in them are going to do. And just to make sure - we run over 3 billion test cycles a day.

That's what you get in a Wabash relay - performance you can count on - no matter which of over 6000 variations you select. Of course all meet proposed NARM and EIA standards.

But as we say - the best news is our price. Why not call us for a quote on a dry reed relay now. Look at it this way. If you found out later you could have purchased a better relay at a lower price from us - you'd have egg on your face.

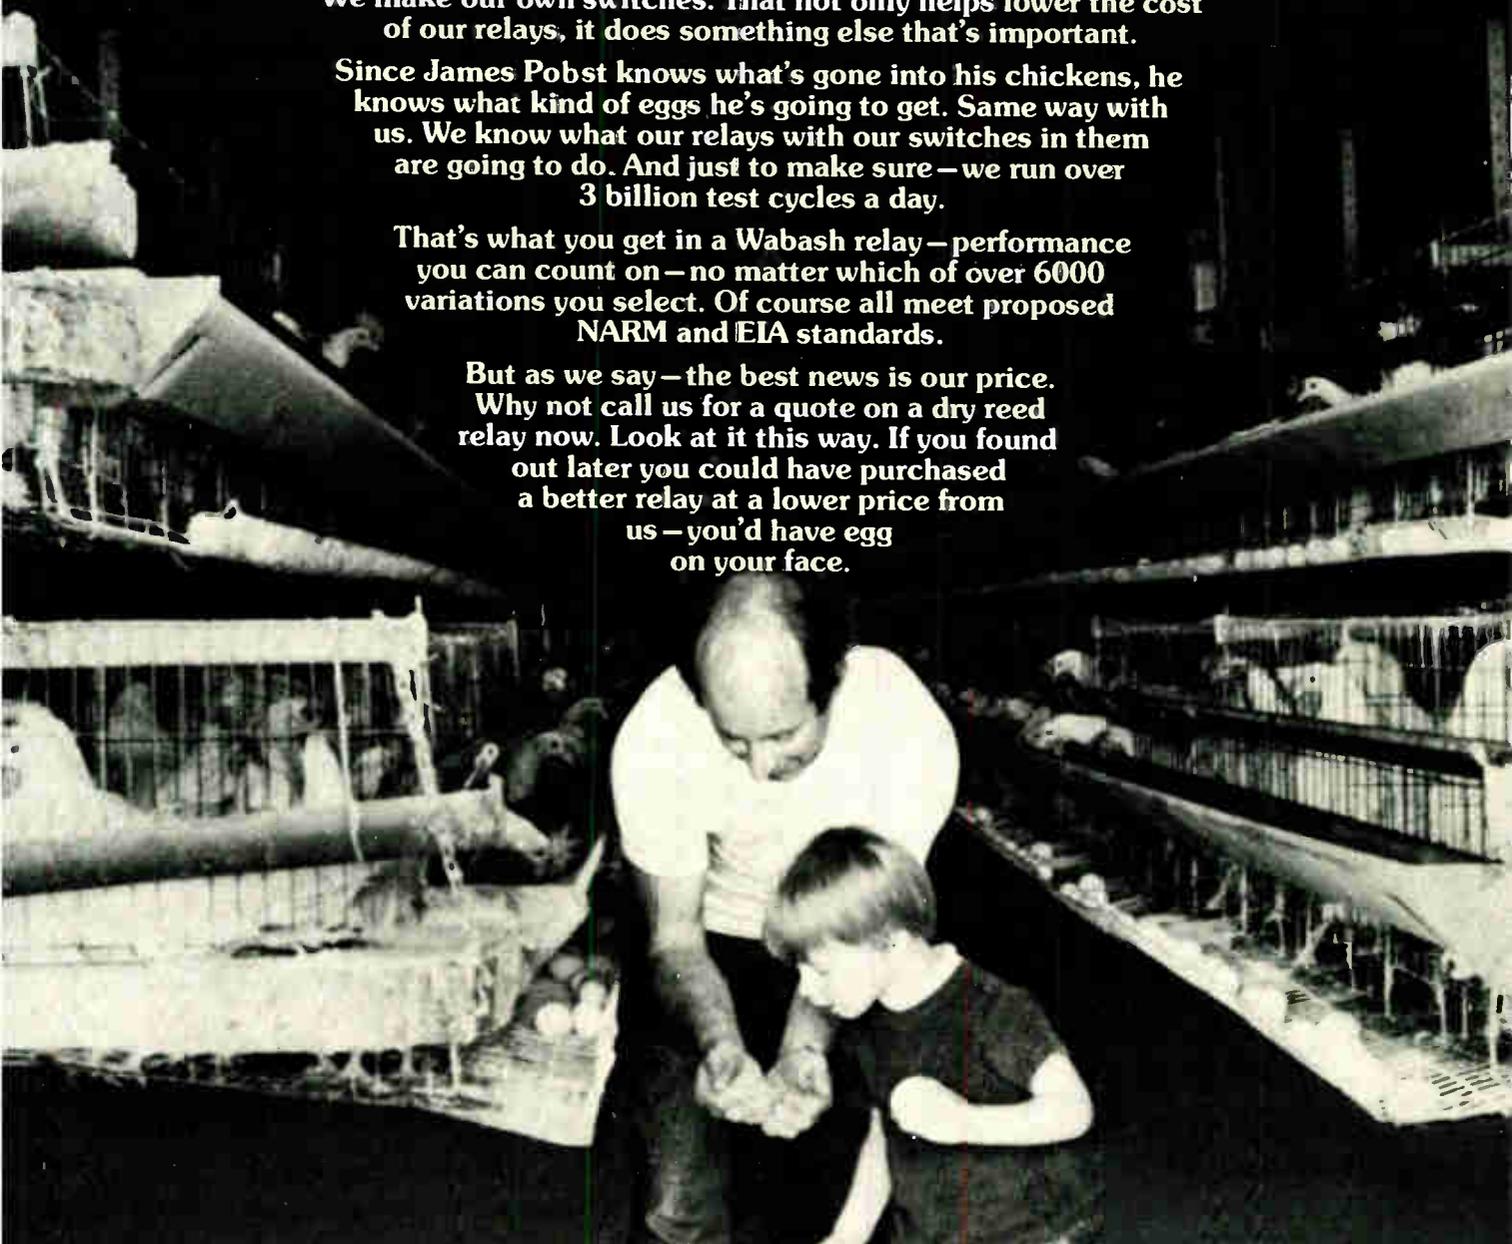

Coils, Relays & Transformers
wabash
of
Wabash, Indiana

and Huntington, Indiana: Farmington, Missouri:
Tipton, Iowa and South Boston, Virginia

For information and quotes write or call:

Wabash, Inc., Dept. RC7, 810 N. Cass St., Wabash, Ind. 46992 Tel: 219/563-2191 TWX 810-290-2722



The Econo-Miser. The most automatically manufactured dry reed relay available. 1 and 2 pole standard types. Less than one dollar in quantity.

Circle 59
on reader service card

Europe The New Frontier

Ever thought of manufacturing and marketing in Europe?
We at Grundy International may be able to offer you
the chance NOW.

As a long established medium-sized
British Group of companies with
considerable design and manufacturing
expertise in electronic and electro-
mechanical equipment, a strong
international marketing operation
and good existing links with
European Commerce and
Industry as well as within
the various Defense
Departments, we can
offer you:

- * A Marketing Capability
- * A Product Design and
Development Capability
- * Manufacturing under License to
Testing Quality Standards (DEF.05-21)
- * Specialist Sub-Contracting
- * A Local Servicing Capability

If you are a small or medium-sized
manufacturer of electro-mechanical/
electronic equipment wanting
to expand by establishing an
export business in Britain,
Europe or the Third World,
write TODAY with details of
your products—

To Owen Boydell,
Managing Director.

LONDON
England

FRANKFURT
W. Germany

PARIS
France



S.W. GRUNDY INTERNATIONAL LTD
Somerset Road, Teddington, Middlesex TW11 8TD
England. Tel: 01-977 1171. Telex: 929728-Grundyted

Circle 60 on reader service card

Britain's CAA says tests gave OK to its plane-landing system

The Civil Aviation Authority of the United Kingdom is offering its test aircraft and tracking equipment for side-by-side comparison of the British and American contenders for the next generation of instrument landing systems. The CAA says **the UK doppler microwave landing system has passed tests at Brussels International Airport, Kjevik Airport, Norway, and Stansted Airport in England**—in addition to earlier trials at Gatwick Airport outside London [International Newsletter, Sept. 15]. An earlier computer simulation at the Brussels airport gave the American time-reference scanning-beam contender a clean bill of health, while predicting that the UK system would experience unacceptable errors due to multipath reflections at certain airports. The CAA says its flight trials gave no indication of such an effect at any of the test airports. Final choice for a new worldwide standard is to come at the April 1978 conference of the ICAO, the International Civil Aviation Authority.

\$30 million of TV gear for Moscow Olympics from Thomson-CSF

Thomson-CSF has won what looks to be the major contract for television equipment for the 1980 Moscow Olympics with an order worth more than \$30 million. **According to Thomson, the order was won against competition from all major worldwide TV suppliers**—with RCA breathing hotly down Thomson's neck. The French firm is to provide a video- and sound-switching center that will be the world's largest when put into operation, plus a wide range of equipment for news gathering and image processing. The equipment includes 100 color TV cameras, which will supplement the 80 already in the USSR and 40 mobile microwave units, plus ancillary equipment such as color monitors and character generators.

Membrain unveils automatic test equipment aimed at U. S. market

Spearheading Membrain's 1978 entry into the U. S. market for printed-circuit-board testers will be its new MB 7700 range of board test systems, which can exercise 256 transistor-transistor-logic pins simultaneously at 5 MHz. They are the outcome of a two-year development program costing over \$2.5 million, partly funded by Britain's National Research and Development Corporation. **Common to all systems is an 8-MHz bipolar bit-slice 16-bit microprocessor, which controls a floppy disk, display, and keyboard.** Membrain uses Intel's 2-bit-wide chip set stitched together with read-only-memory firmware. The driver and sense electronics associated with each test pin has been reduced to single bipolar LSI chips with semicustom designs from Ferranti Ltd. and the U. S. firm Interdesign Inc. The software is modular, and there are two test-program languages, Memtest and Atlas, the international test language.

Ferranti executives in California for Interdesign talks

In a make-or-break bid to win Interdesign, the Sunnyvale, Calif., semicustom design company, a task force of Ferranti executives headed by Alan Shepherd, manager of the Components division and Brian Down, marketing manager of Ferranti Semiconductor Ltd., are in the U. S. for talks with Hans R. Camenzind, president of the privately held firm. **The companies have a similar approach to making and marketing semicustom designs by specially configuring the final metalization of their chips, which are otherwise standard, carefully chosen circuits.** Ferranti has reportedly raised its first offer of \$92 million for a 56% controlling interest to \$4.66 a share for all unsold stock—at a price of roughly \$3.5 million.

THE FIRST MULTI-PROTOCOL MOS/LSI DEVICE FOR SDLC AND HDLC

NOW IN STOCK

Standard Microsystems' new COM 5025 multi-protocol communications controller, is a 40-pin monolithic IC using the COPLAMOS® n-channel silicon gate process. It replaces hundreds of IC's and operates at speeds up to 2 M baud.

The device is a universal synchronous receiver/transmitter for dedicated control and implementation of all major protocols, including bit-oriented types such as SDLC, HDLC, and ADCCP, and byte-oriented BISYNC and DDCMP. It is the first programmable chip controller approved for these protocols and the only one that processes both SDLC and HDLC protocols.

The COM 5025 is processor compatible (8 or 16 bit), and direct TTL compatible, and contains selectable protocols and a tri-state input/output bus. The data, status, and control registers are double buffered. Full or half duplex operation is provided by means of independent transmitter and receiver clocks.

Data lengths are individually selectable for receiver and transmitter from 1 to 8 bits. Data, status and control registers are linked to a master reset which initializes them to the SDLC protocol on power-up. This device also has a built in maintenance feature to test the operation of the chip by performing data loop-around internally.

The controller of the device is responsible for all higher level decisions and interpretation of some fields within message frames. The degree to which this occurs is dependent on the protocol being implemented. The receiver and transmitter logic operate as two totally independent sections with a minimum of common logic.

For bit-oriented protocols such as SDLC, HDLC and ADCCP, the COM 5025 provides bit stuffing and stripping, automatic frame character detection and generation, and residue handling. Messages which terminate with a partial data byte are accompanied by the number of valid data bits available.

Options for bit protocols include variable length data (1 to 8 bit), error checking—16 bit polynomial CRC (or CCITT), primary or secondary station address mode, APA all parties address, extendable address field to any number of bytes, extendable control field to 2 bytes, and idle mode to transmit flag characters or mark the line.

For byte-oriented protocols the COM 5025 features automatic detection and generation of SYNC characters, and options such as variable length data, variable SYNC characters (5, 6, 7, or 8 bits), error checking—16 bit polynomial CRC (or CCITT) or odd/even parity, deletion of leading SYNC characters after synchronization, and an idle mode to transmit SYNC characters or to mark the line.


COM 5025 devices are now available in quantity from SMC and their distributors.



**STANDARD MICROSYSTEMS
CORPORATION**

The largest manufacturer of data communication circuits

35 Marcus Boulevard, Hauppauge, N.Y. 11787
(516) 273-3100 TWX-510-227-8898

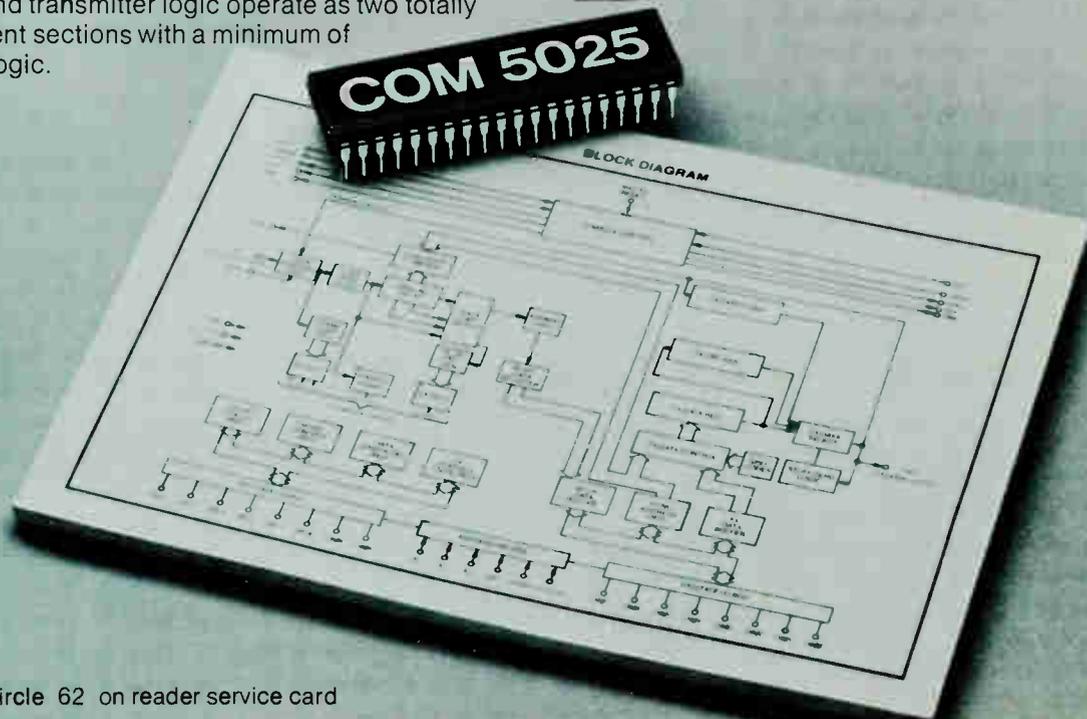

Circle 62 on reader service card

Microprocessors go to the front lines in communications, test gear

Microprocessors and other digital circuitry are answering the call to arms from Racal Tacticom Ltd., which commands a worldwide military market in high-frequency and very-high-frequency tactical communications equipment. The subsidiary of Racal Electronics Ltd. is launching a strike force of new army gear incorporating up-to-date semiconductor technology.

The new equipment includes a 400-watt tactical hf radio station that uses a chip in its antenna matching and tuning unit and two manpack hf radios and an associated 100-w station that has a semiconductor memory in its tuning unit. The British firm also is introducing a range of test gear for production and field use that includes fault-diagnosis units that use processors.

Powerful radio. The 400-w hf communication system is intended for reliable long-range communications from front-line positions to general headquarters under the most adverse conditions. The company has strapped four of its well-proven 100-w amplifiers into a single unit to produce an output usually associated with fixed transmitters.

To provide the degree of frequency agility necessary to defeat enemy jamming, the new tactical system has a new antenna matching and tuning unit, the VRA549. This unit automatically tunes to any specified frequency in the 2-to-30-megahertz band in less than 1.5 seconds.

Under microprocessor control, high-speed vacuum relays switch in reactive components to compensate for changes in antenna impedance at various operating frequencies. The processor thus minimizes the antenna voltage-standing-wave ratio, and so it minimizes the power reflected back into the transmitter. Racal

already is using this technique in its 100-w units, but will not disclose the type of microprocessor it is using. Conventionally, tuning is by servo-controlled variable reactors and can take as long as 35 seconds.

The new 10-w manpack radios are half the weight and size of most competitors. By combining thick-film techniques with linear and digital integrated circuits, Racal has reduced the weight to 16½ pounds and the size to ⅓ cubic foot. The PRM 4021 covering the 2-to-16-MHZ range has 140,000 channels in 100-hertz steps, while the PRM 4031 covering the 1.6-to-30-MHZ range has 284,000 channels in 100-HZ steps.

When the PRM 4031 is combined with Racal's 100-w amplifier, the result is a vehicle-mounted base station for the manpacks. This unit, the VRM4145, features a programmable 10-channel frequency selector. An external encoder unit loads the predetermined channel frequencies into the digital memory within the transceiver. The memory, which incorporates a standby battery supply, sets the frequency synthesizer to the desired channel.

The operator can quickly change channels with the flick of a switch. When the VRM4145 is in this automatic channel-selection mode, the digital-logic circuitry that divides the single-crystal frequency refer-



Flick of a switch. Frequency selection in Racal field transceiver is programmable for quick channel selection. Any 10 frequencies in the range may be entered in a memory.

ence to produce the encoded channel frequencies gets the required frequency from a semiconductor shift register.

Diagnosing faults. Racal's new range of automatic test equipment includes complex test systems that will carry out digital and analog dc-to-rf tests on complete communications systems and printed-circuit-board testers capable of identifying faulty components. The equipment has been designed around Computer Automation's Naked Mini 16-bit processor. Two standouts in this range of ATE gear are fault-diagnosis systems, one that incorporates the Naked Mini and the other a rugged microprocessor-based system for field workshops.

The larger of the two systems, the RTL5, can be used to prepare and edit programs for testing new equipment. These programs also can be run on the RTL5M, which has a Motorola 6800 microprocessor controlling a floppy-disk and display unit. Once loaded with the appropriate program, the 6800 guides the operator through a series of fault-location procedures displayed on the screen.

These new systems should help Racal Tacticom keep its export drive going. Late last month, it won a \$25 million contract from an unspecified North African country to supply various tactical radio systems and test gear. Also, it has sold about \$126 million worth of Clansmen transceivers in the United Kingdom and elsewhere. Moreover, the firm is bidding with RCA Corp. on the U. S. Army's huge Singars-V combat-radio contract. The parent firm is doing well, too: it is acquiring Dana Laboratories Inc., the Irvine, Calif., instrument maker [p. 48]. □

Japan

Simple microkit serenades its user

Not every microcomputer user wants a machine that can produce electronic music in response to various



Easy work. Microcomputer kit is designed for fast assembly by school-age builders.

simple input signals. But then, not every microcomputer user is in grade school. Yet that is the time to introduce the inhabitants of tomorrow's digital world to the computer, thinks the giant Japanese firm, Matsushita Electric Industrial Co.

The firm's Panakit KX-33, intended primarily for ages 12-14, combines a computer of limited ability—a controller really—with an electronic music machine of limited ability. The easy-to-assemble kit comes with firmware programming of its limited number of functions. It will cost about \$155.

Simple learning kit. The kit is intended to give users an idea of the basic concepts of computer technology, including the execution of functions by combining user instructions with input signals. It also is intended to give its young operators some idea of microcomputer functioning, introducing them to the world of the central processing unit, registers, memory, and so on.

Since it is basically a controller, the computer is built around the 4-bit MN1400 microprocessor from subsidiary Matsushita Electronics Corp. In addition to the arithmetic/logic unit, the chip includes 1,024 words by 8 bits of read-only memory for the system program and 64 words by 4 bits of random-access memory, which stores keyboard data. Also in the kit are two static RAM chips with 256 words of 4 bits each, which hold the tunes keyed in

for RAM storage by the user.

The Panakit includes an 8-bit latch, audio-amplifier and multivibrator integrated circuits, and a speaker. There are keyboard switches and light-emitting diodes and associated drivers for the four-digit display.

Once the kit is built, it can store any song that does not exceed its three-octave range or its storage capacity. It can also perform control tasks over a 24-hour period. As well as music, it can produce a one-minute buzzer sound; both outputs may be triggered at a set time or by keyboard actuation or an input signal. Three transducers supply input signals: a cadmium-sulphide photocell, a transducer that responds to moisture, and a reed switch that closes when a magnet is near.

Name that tune. The user writes in a song note by note, using two hexadecimal digits from the keyboard to give the pitch and another two to give the length of the note. Hitting the increment key then writes the note shown on the display into memory and advances the program counter to the next address. Notes and pauses from a full note to 1/256 note, including dotted notes, can be programmed.

The memory can hold 127 notes—generally enough for a popular tune. Alternatively, as many as four partial selections may be programmed and addressed independently. Parents will be glad to know the music-loving child can instruct the Panakit to repeat the song a specified number of times. However, there is a knob for volume adjustment, as well as one for tempo.

The kit is designed to give the user a feeling of participation in its construction, but it is kept simple enough to stay within the limits of a first-time solderer. Thus much of it comes assembled, including line-cord wiring and wiring to the ICs.

From unpacking to tightening the last screw of the cabinet should take no more than three hours, the company says. Confident of Panakit's future, Matsushita is starting off at an initial production rate of 4,000 kits a month. □

We've Bridged the Gap



If GenRad's 1796 dynamic digital/analog board test system is too much machine for your application, and you need more performance than GenRad's 1795 digital tester normally provides, then you probably need GenRad's new 1799 Digital/Analog Test System. Our unmatched experience with board testing tells us that the 1799 is just the right system for many of today's applications.

A key feature of the 1799 is that it is an integrated system, which simply means it was **designed** as a hybrid tester. When you compare its performance with other hybrid testers on the market which are derived by adding analog capability (via IEEE-bus based instruments) to a

digital system, you'll find a world of difference.

Interface for the unit under test (UUT) is compatible with that of the 1795 and with the hybrid section of the 1796. Also, the fixed or programmable digital driver/sensors operate through a universal scanner which allows either digital or analog source and measure capability at each I/O pin.

For the complete story on the 1799 Digital/Analog Test System, request a copy of our new brochure.

The difference in software is the difference in testers




 **GenRad**

300 BAKER AVENUE, CONCORD, MASSACHUSETTS 01742 • ATLANTA 404 394-5380 • BOSTON 617 646-0550
CHICAGO 312 884-6900 • DALLAS 214 234-3357 • DAYTON 513 294-1500 • LOS ANGELES 714 540-9830 • NEW YORK (NY) 212 964-2722
(N.J.) 201 791-8990 • SAN FRANCISCO 408 985-0662 • WASHINGTON, DC 301 948-7071 • TORONTO 416 252-3395 • ZURICH (011 55 24 20

Circle 65 on reader service card 65


The MOS world

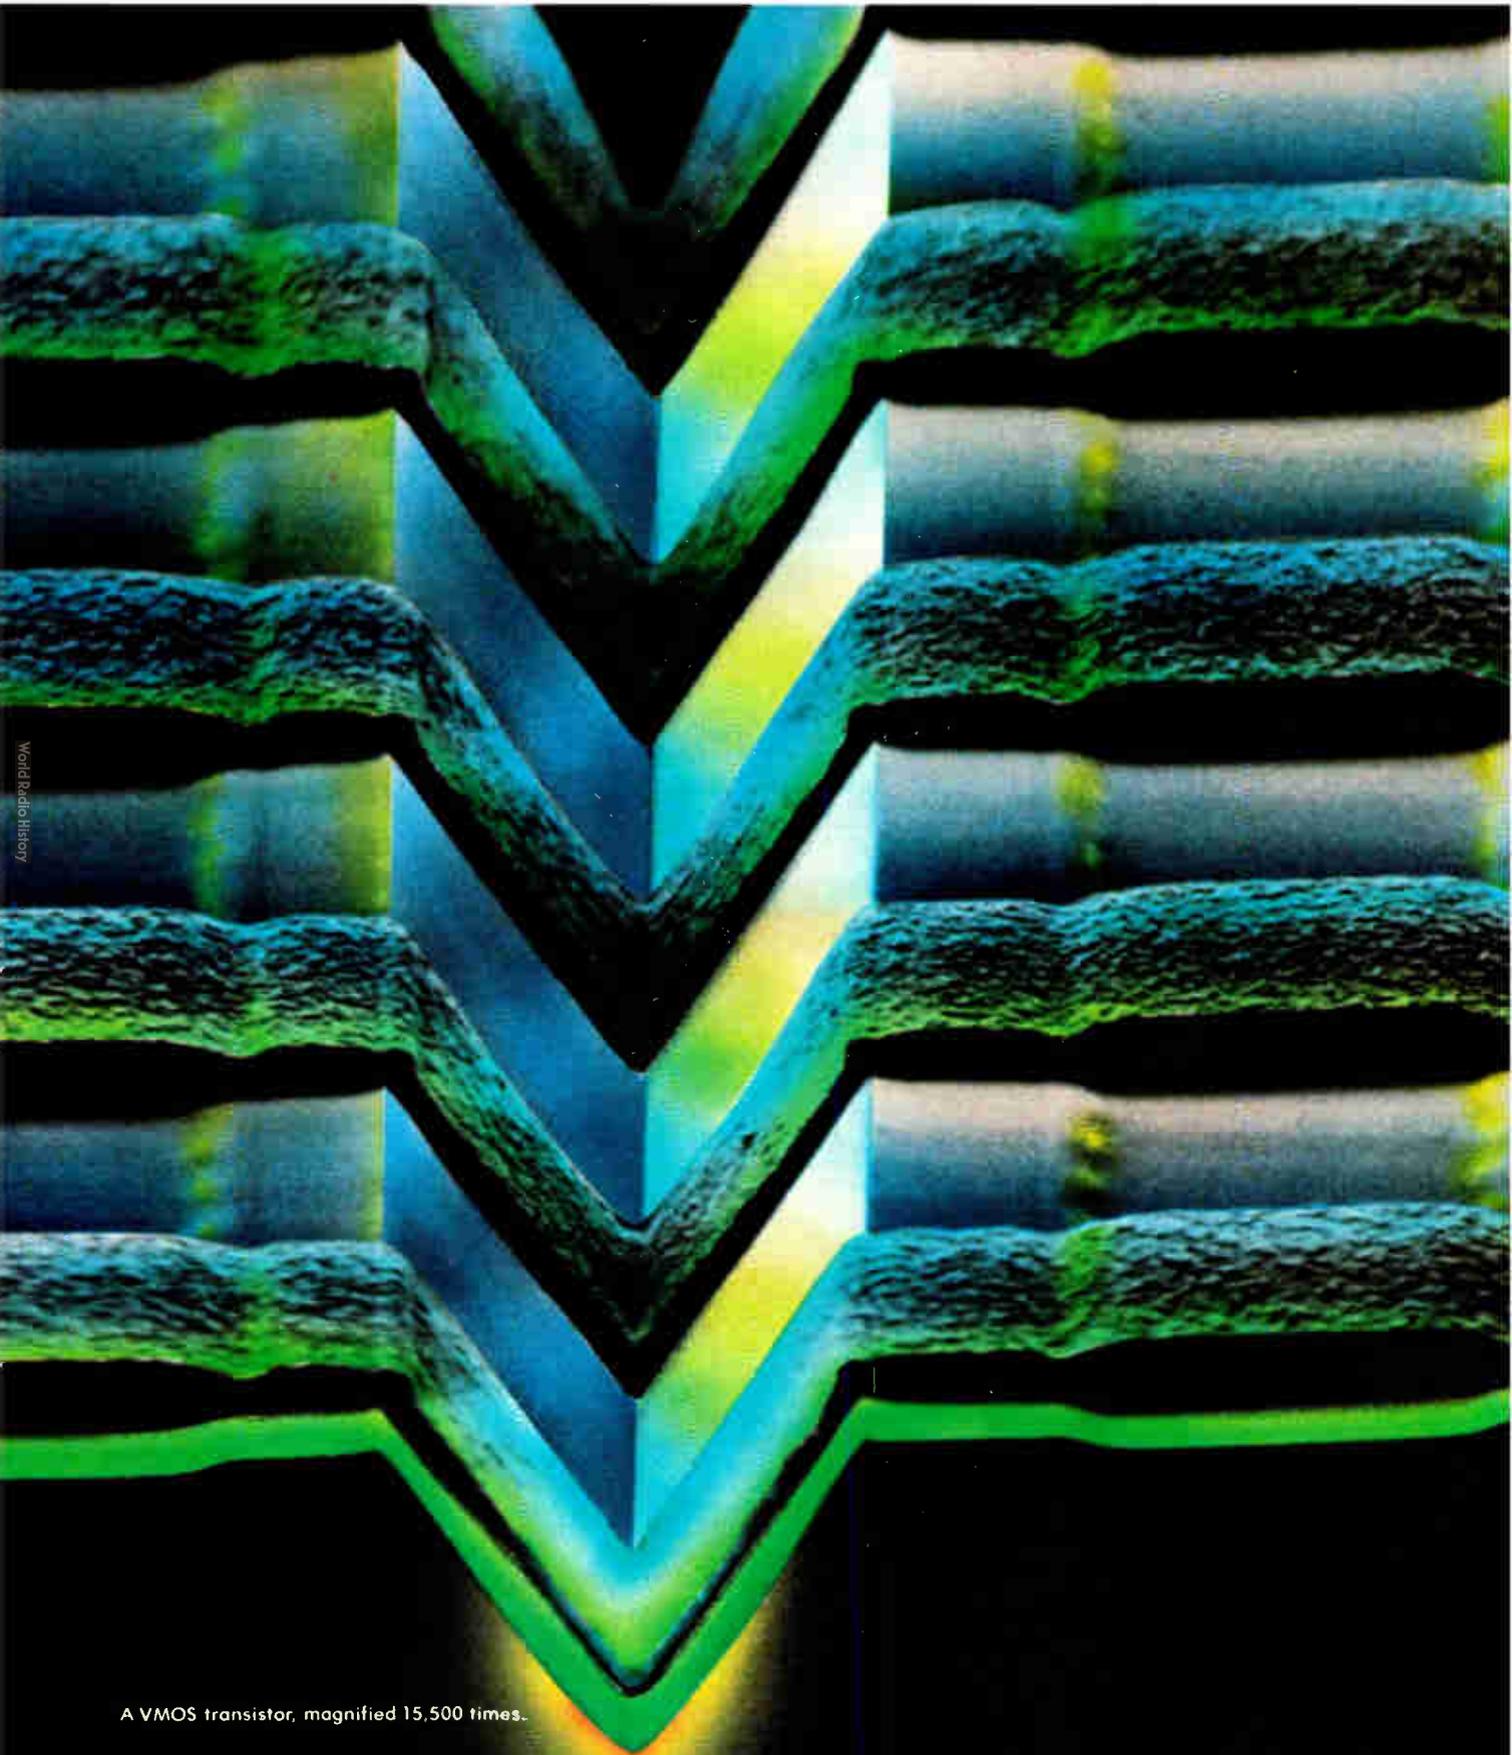

World Radio History

A VMOS transistor, magnified 15,500 times.

is no longer flat.

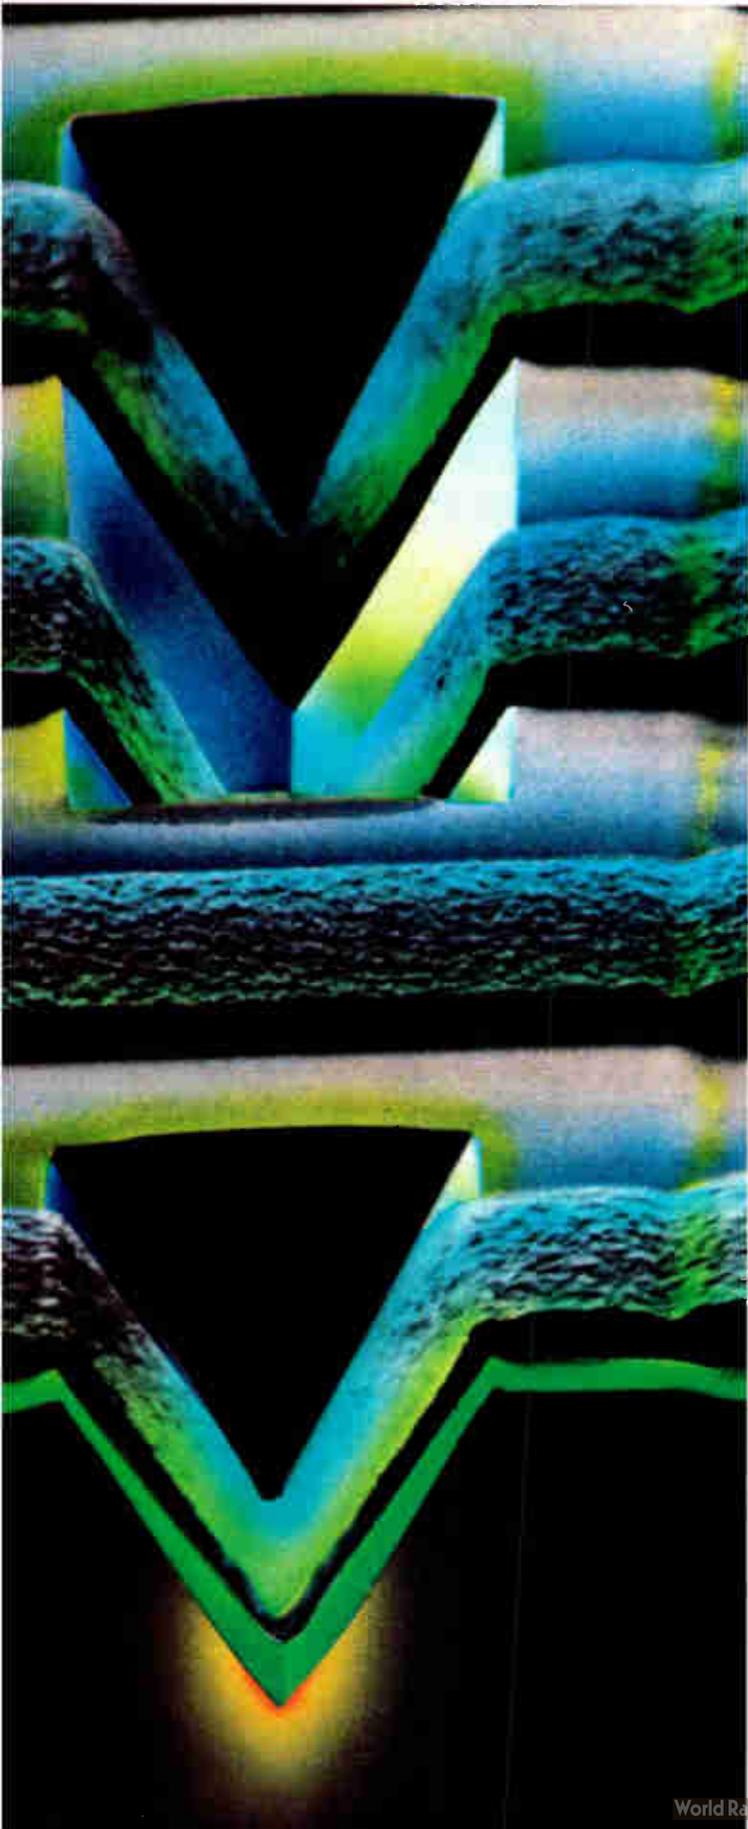

AMI creates VMOS. This revolutionary idea revolves around a three-dimensional transistor, etched into the silicon substrate.

The result? A circuit that's extremely fast, dense and inexpensive.


It isn't blue-sky theory. The first VMOS RAM, the 1K S4015-3, is in volume production now. And a reputable second source has committed to manufacture VMOS RAMs in 1978.

Our 35 nanosecond (typical, 45 nanosecond maximum) 1K static memory is pin compatible with the fast 1K NMOS and bipolar RAMs, and leads the way for the large family of VMOS products arriving soon. These will include:

NEW VMOS PRODUCTS AND TYPICAL ACCESS TIMES

4K fully static RAM	(1K x 4)	80 ns
4K fully static RAM	(4K x 1)	80 ns
4K fully static low power RAM	(4K x 1)	45 ns
8K fully static RAM	(1K x 8)	125 ns
16K ROM	(2K x 8)	100 ns
64K ROM	(8K x 8)	250 ns
16K EPROM	(2K x 8)	200 ns

The density permitted by vertical short-channel FETs produces VMOS circuits that are much smaller than competitive chips, increasing the speed and lowering the cost. For example, the latest bipolar 1K size is 61% larger, and the new fast NMOS 1K is 87% larger than AMI's S4015-3. And VMOS densities are achieved without stretching feature dimensions at the sacrifice of yields, as is necessary with bipolar and NMOS technologies.

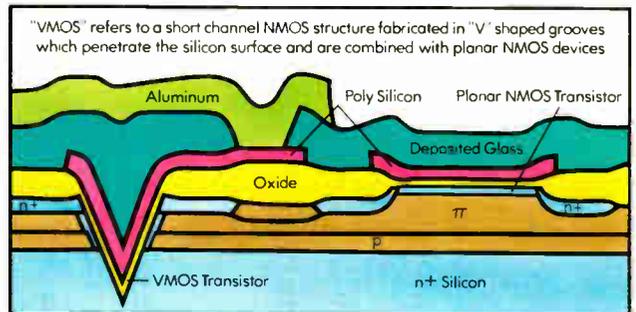

In short, VMOS presents the best of all possible worlds. If you want to stay up to speed at a down-to-earth price, call your nearest AMI distributor or sales office. Or write to AMI Marketing, 3800 Homestead Road, Santa Clara CA 95051. You'll be entering the MOS world of the future.

**VMOS: the
new technology
from AMI**
AMERICAN MICROSYSTEMS, INC.

Circle 66 on reader service card

**PMI's
COMDAC™ companding
D/A converter. When
you think about what
it can do, nothing
seems very far-fetched.**

Not long ago, we ran a little contest in one of the electronics magazines. We asked engineers to come up with the most creative ideas they could think of to put PMI's unique COMDAC—the first and only companding D/A converter—to work. We got lots of responses with exciting ideas. But the interesting part is that no less than five engineers said they'd had terrific ideas—but they couldn't submit them because their corporate attorneys were starting patent searches.

That's the kind of brainstorming that COMDAC has generated since we first introduced it.

The reason is simple: nature is nonlinear. People, plants, animals, water, wind—we don't live in a straight-line world. We live in a world of curves, slopes, and human response systems (ears, eyes, touch) that do not follow straight-line paths. In trying to reduce these things to digital data, or to imitate them, we've always fallen short.

Until COMDAC.

With the help of COMDAC you can linearize analog signals. COMDAC can supply the shades of grey, the sweeping curves, the "vive la différence!" of the natural world. COMDAC uses logarithmically companded digital techniques for D/A conversion; with just eight bits, it provides the dynamic range of a 12-bit DAC—72dB or 4096:1. With that range, it can produce a convincing facsimile of the human voice, for example. Your watch radio can awaken you gently, with soothing, motherly tones, or shake you out of bed with a drill sergeant's scream—whichever is called for in your case.

It's six-forty—rise and shine. Squash at eight. Board meeting at ten.

Consider these applications—some of which are already a reality:


- Digitized audio—music, sound effects, voice (μP controlled)
- XYZ positioning (automated drill presses, for example)
- Motor controls
- Echo/reverb devices (for electronic guitars, electronic organs, synthesizers)
- Voltage-controlled oscillators and filters
- Servo motor controls

- Altimeters
- Waveform generation (with PROM)
- VU meters (for better response)
- Voice recognition (imagine a typewriter you could dictate letters to!)
- Tone generators
- Voice encryption
- Voice warning systems (they're already using them in aircraft)
- LOG sweep generators
- Data acquisition
- Recording studios
- Verbal response systems (like, your car could give you the word when it's overheating)


12-bit DAC can do, think of what you will save by using a low-cost 8-bit system to do the job of the expensive 12-bit approach.

With a little bit of thought, a creative engineer—that's you—can come up with some really dazzling ideas. The surface has just been scratched. If you'd like a copy of all our contest entries, circle the bingo number below. We'll send technical literature that will help you with your application. Want a sample COMDAC? Send us a request on your letterhead.

Precision Monolithics, Incorporated
 1500 Space Park Drive, Santa Clara, CA 95050 (408) 246-9222.
 TWX: 910-338-0528 Cable MONO

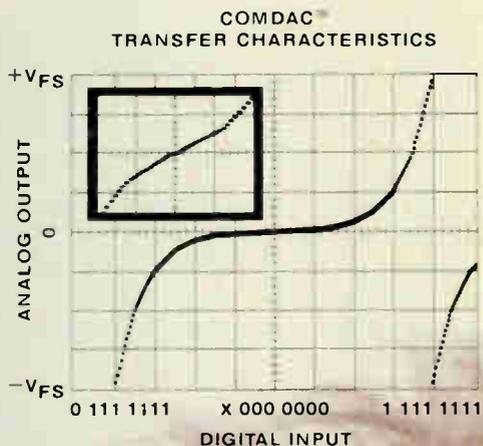


Keep in mind that COMDAC is not just a concept. It's a working reality. In the last two years, we've delivered half a million and cut the price in half. And since the 8-bit COMDAC can do many things a

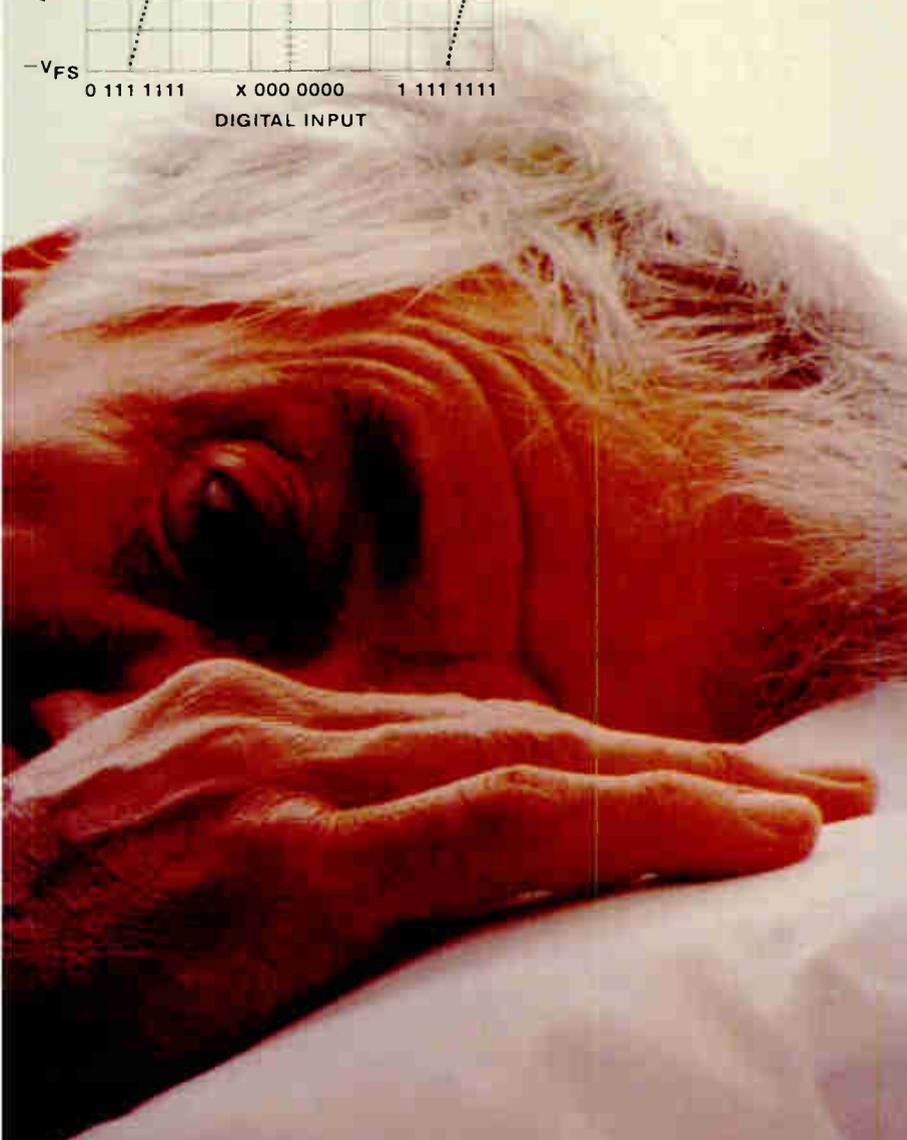

Circle 68 on reader service card

Intel delivers the 8085, designers just

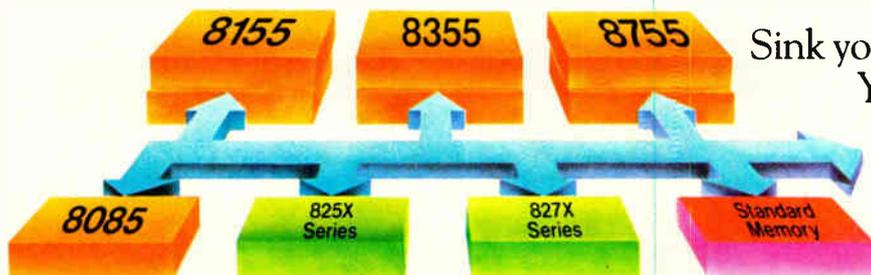

Sink your teeth into Intel's new 8085. You'll find it's the only micro-computer that combines the performance, economic advantages and total support it takes to be recognized as


the new industry standard. So it's no surprise that there are already four announced sources for the 8085. In fact, the deeper you go, the better the 8085 gets.

The 8085, even more than the 8080 it succeeds, is a total design solution, not just a component. It delivers higher performance, for capabilities far beyond the 8080's. It has a higher level of integration, so you can design your products with fewer components, making them more competitive and more profitable. And to help you get those products to market quicker we've given the 8085 the industry's broadest base of system and development support.

Yet the 8085 is fully compatible with the 8080. So your investment in existing designs is protected, and implementing new designs is simplified by the wealth of 8080 software and peripherals at your disposal.

It all adds up to a design solution you won't be able to resist. That's true for a broad range of applications. The 8085 can be designed in as an economical stand-alone three-chip system using the 8085 CPU, the 8155 256-byte RAM with I/O and timer, and the 8755 2K-byte EPROM with I/O or its interchangeable 8355 ROM with I/O.

You can expand this basic system for larger applications using additional RAM, ROM, EPROM and Intel's complete family of first and second generation peripheral controllers, including our four new programmable peripheral controller chips—the 8271* Floppy Disc Controller, 8273* Synchronous Data Link Controller, 8275 CRT Controller and 8279 Keyboard/Display Interface. All these components including 8755 EPROM operate from a single +5V supply.

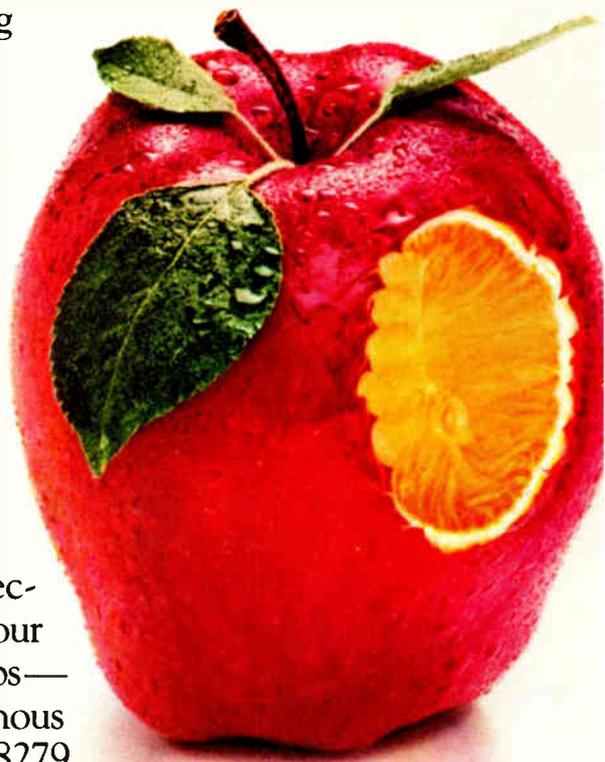

*Available 4th Quarter 1977

the new microcomputer can't resist.

A multiplexed data/address bus permits integration of many auxiliary system functions—such as clock generation, system control and multiple interrupts—onto the 8085 chip while maintaining 8080 compatibility and the same 40-pin package. And forward-thinking engineers will realize that it is also a link to Intel's future generation microcomputer products.

No microcomputer can match the 8085 as a total design solution because no microcomputer can come close to the 8085's support base. Support for the 8085 includes the Intellec® microcomputer development system with resident PL/M, the high level programming language that can cut months off your software development time. Intellec is the only development system with ICE-85™, providing in-system emulation for faster system development and debugging. Then there's application assistance, training classes and seminars worldwide. And a comprehensive development software library at your disposal.

The quickest way to get a taste of the 8085's power and versatility is with the SDK-85 System Design Kit. It's available now for only \$250. You can order SDK-85 and all MCS-85™ components directly from your nearest Intel distributor: Almac/Stroum, Components Specialties, Cramer, Hamilton/Avnet, Harvey Electronics, Industrial Components, Pioneer, Sheridan, L.A. Varah, Wyle Liberty/Elmar or Zentronics.

Or, for more information on the 8085 and SDK-85, use the reader service card or write: Intel Corporation, 3065 Bowers Avenue, Santa Clara, California 95051. Telephone: (408) 246-7501.

MCS-85™ Microcomputer System Components Family

8085 CPU with system bus control, system clock generator, serial I/O and 4-level interrupt control.

8155/8156 RAM, I/O & Timer. 256-byte static RAM, 22 I/O lines, 14-bit programmable interval timer/event counter.

8355 ROM & I/O. 2048-byte masked ROM, 16 I/O lines. Interchangeable with 8755.

8755 Erasable PROM & I/O. 2048-byte UV erasable and electrically reprogrammable EPROM. Interchangeable with 8355.

Compatible MCS-80™/MCS-85™ Peripheral Components

General Purpose

8251 Programmable Communications Interface

8253 Programmable Interval Timer

8255 Programmable Peripheral Interface

8257 Programmable DMA Controller

8259 Programmable Interrupt Controller

8205 High Speed 1 out of 8 Binary Decoder

8212 8-bit Input/Output Port (Latch/Buffer)

8216/8226 4-bit Parallel Bidirectional Bus Driver

Dedicated Function

8271 Programmable Floppy Disk Controller

8273 SDLC Protocol Controller

8275 Programmable CRT Controller

8279 Programmable Keyboard/Display Interface

Performance Matched Standard Memory

Static RAM

2114 1024x4-bit, 450 nsec, 18 pin

2142 1024x4-bit, 450 nsec, 20 pin

8101A-4 256x4-bit, 450 nsec, separate I/O

8102A-4 1024x1-bit, 450 nsec, separate I/O

8111A-4 256x4-bit, 450 nsec, common I/O

ROM/EPROM

2716 2048x8-bit Erasable PROM, 450 nsec

2708 1024x8-bit Erasable PROM, 450 nsec

2316E 2048x8-bit Masked ROM, 450 nsec

8308 1024x8-bit Masked ROM, 450 nsec

intel® delivers.

Circle 70 on reader service card

Quite frankly, we're going to be #1 in memory testing till the cows come home.



Four years of matching the memory industry breakthrough for breakthrough have made Teradyne the leader in memory testing.

We started back in 1973 with the J384, a dedicated memory test system. It tested RAMs and ROMs efficiently and economically. But things were changing fast.

1974 saw the advent of dynamic devices like the 4k 2107. And we added the M385 microprogrammable pattern

generator to keep pace.

In 1975 our answer to increasingly complex memory technology was a new system, the J387.

In 1976, when 16k and page-mode parts went into production, we responded with the H712 test deck.

Today, Teradyne has an installed base of well over 100 J380-series memory test systems working for more than

20 companies. At probe, at final test, and at incoming inspection. That's a larger dollar base than our two nearest competitors combined.

Four years of experience have made us the most capable source of memory test equipment in the world.

If you test semiconductor memories, call us today. You'll call us eventually. Because no matter where memory technology goes from here, Teradyne will be there.

TERADYNE

Semiconductor Test Division
Boston, Mass. - Chatsworth, Calif.

Speed vs cost in nonimpact printers

Electrographic machines turning out 20,000 lines a minute impress, but slower—and less expensive—ink-jet types could capture market

by Raymond P. Capece, Computers Editor

Electrographic computer-output printers are winning oohs and aahs in the nonimpact printer business and are bidding to all but eliminate impact machines from consideration for high-speed, large-volume jobs. The likes of IBM Corp., Xerox Corp., Honeywell Corp., and Siemens AG are making laser-based printers that spew out 8½-by-11-inch sheets of computer output with copier-machine quality.

But there is a catch. These 20,000-line-per-minute workhorses—more like printing stations, with their collating, punching, perforating, and other printshop capabilities—are a costly \$250,000 each, though in most cases they are leased by first-time users. They are now competing in a constricted market populated by Fortune 500 companies that go through more than a million sheets of paper each month and are

willing to pay a premium for speed. As estimated by International Resource Development Inc., a New Canaan, Conn., research firm, that market is expected to amount to \$150 million for an installed base of about 1,400 machines by 1985. R. C. Bishop, marketing manager for Honeywell Information Systems Inc.'s PPS (page-printing system) group in Waltham, Mass., thinks that that estimate is too conservative. He says that more than 100 PPS machines have been installed, and "10% of our users previously had only a single-impact printer."

Not only that, but, Bishop says, "we think that there are more markets than just the large corporations. Any company that has two, three, or more printers could use the PPS. What's hidden from most analyses is the amount of printing done off line."

But some informed observers therefore expect a different type of nonimpact printing to capture the lion's share of the market in the next decade or so: a less expensive ink-jet printer. They reason that, since the market for fast, high-volume machines is limited, the relatively low speed of ink-jet machines is no problem. Also, while the copier-machine techniques of the electrographic printers mean that only certain papers can be used, ink-jet types print on anything.


Plain paper. What makes that argument so powerful is the voice of Mead Corp., the Dayton, Ohio, paper maker that did \$1.6 billion in sales last year. "We concluded from a study of all types of printers, including thermographic and electrographic, that the future of printing is in plain paper," says Les Jezuit, manager of printer equipment and services at Mead's Digital Systems division, which began developing its own ink-jet printer 13 years ago. "But ink-jet machines go beyond nonimpact—they're noncontact, which means that as long as you've got an ink that will adhere to the material, you can print on anything, whether it's paper, metal, or Mylar." Mead's Dijit series of ink-jet printers is designed for paper printing only, and Jezuit adds that Mead got into the printer business "actually as a defensive move, to plan the future of our paper products."

Dataproducts Corp. of Woodland Hills, Calif., also likes plain paper

Little squirt. IBM's 6640 document printer is only midsized ink-jet printer now on market. It was introduced in June 1976.



Probing the news

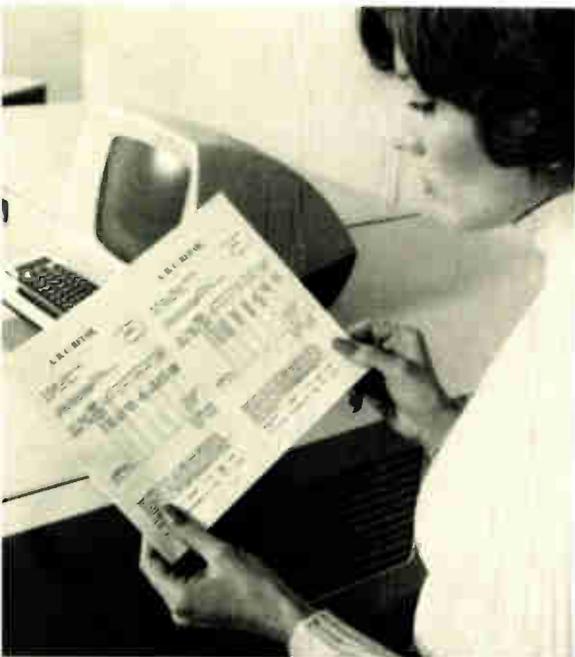

Light touch. Xerox 9700, which uses a laser scanner, can perform simultaneous printing—in this case, two forms.

but feels that electrographic printers will work their way down to less costly levels. Dataproducts, a printer maker, places reliability before speed and likes 4,000 to 8,000 lines per minute as the best range for ease of paper handling.

Speed, too. But Mead is competing with press printing and is after high speed. It will soon introduce its model 2700, claimed to be the fastest printer in the world, racing along at 800 feet per minute. The speed is designated in feet because the 2700 is capable of generating characters several inches tall. In terms of standard printed lines, the count works out to about 80,000 lines per minute, to be compared with electrographic processes running at about 20,000 lines.

The speed of Mead's machines is attributable to a multiple-nozzle array of ink jets—960 of them in a full line width of 8 in. Other ink-jet machines, like those made by A. B. Dick Co., Chicago, use a single nozzle. But both Mead and A. B.

Dick, which manufactures five-by-seven-dot matrix printers intended for product date-coding and addressing of forms, make stand-alone machines for off-line printing—neither is addressing the computer-output market. And while speed is a strong selling point for printing forms and other jobs competitive with offset, it appears no longer to be the major issue in computer output.

The reason: few computer users can make full use of an output of 20,000 lines per minute because then they would have to handle tons of paper per month. Ken Bosomworth, president of International Resource Development, points out:

“Taking advantage of the high-speed capabilities of the machines isn't simple. You've got to be able to load and remove quickly several hundred pounds of paper, and we've observed, just as the business-forms printshops have, that many of the big jobs shouldn't be brought in to the house. Rather, they should be done outside, off line, from magnetic

We're showing off for Commonwealth Edison.

Chicago's Commonwealth Edison uses Ramtek color graphic displays for rapid display and status reporting of pipelines, valves, pumps, and other generating station data. A clear, color-coded display is updated every 5.0 seconds, giving near-instantaneous visual scan-log-alarm functions, bar graphs, one-line piping diagrams, flow status, etc.

Before the Ramtek systems were installed, status reporting was by hardwired mimic boards, black and white alphanumeric CRTs and typers.

The Ramtek system not only costs less, it also allows more information to be presented to the operator in a form that is quickly and easily under-

stood. This results in better operator efficiency, and faster alarm reaction time. In Commonwealth Edison's 16,000 Megawatt system, thirty Ramtek color graphics displays will be utilized.

Electronics abroad

Hungary's strength is communications

Next to smallest country in Comecon manages to occupy spot near the top in terms of production volume and product range

by John Gosch, Frankfurt bureau manager

The contributions of Hungarians to science and technology range from the achievements of Budapest-born atomic scientists Edward Teller and Leo Szilard to the invention of holography by Dennis Gabor.

But in no branch of technology is Hungary stronger today than she is in communications. Although the second smallest of East Europe's Comecon countries in terms of population (10.6 million), Hungary rates as the Bloc's second biggest in communications, after the Soviet Union, industry officials say.

Last year, output of commercial and consumer communications equipment combined came to roughly \$1.25 billion, says Endre Nagy, commercial manager of the Hungarian telecommunications industries association. Add to that roughly one third for instruments, industrial, and medical electronic systems, and some other products, and Hungary's overall electronics output in 1976 totals nearly \$2 billion.

Commercial figures. Of the \$1.25 billion figure, commercial communications equipment—from simple rural telephone exchanges to sophisticated microwave links—accounted for roughly 45%, Nagy says. But, at the expense of consumer communications products—which include radio and television sets, components, and much data-processing equipment—that share will increase substantially during the next decade and a half—to 50% by 1980 and to 60% by 1990.

Exports in commercial communication equipment will claim 56% of



On the line. Hungarian women at the Videoton factory in the ancient town of Székesfehérvár work on printed-circuit boards intended for the firm's line of data-processing equipment.

production this year, Nagy estimates. For some product categories, like microwave systems, studio gear, and telephone exchanges, "exports may well account for between 70% and 90% of production," he says. As expected, Hungary's prime customers are its partners in Comecon, which takes some four fifths of its equipment exports.

But markets in the West and in developing countries will command more attention in the future. Telecommunications exports to hard-currency countries will more than double during Hungary's current five-year economic plan to as much as \$200 million by 1980.

The backbone of commercial communications work is clearly telephone switching systems. These include crossbar rural and private automatic branch exchanges of Hungarian design and public automatic exchanges made under license from Sweden's L M Ericsson. Built mainly at the BHG Budapest Telecommunication Works and sold through the Budavox Telecommunication For-

eign Trading Co., such equipment generates by far the most export business for the industry.

In the realm of computers, Hungary's main activities are meshed with those of other East European countries through Comecon's ES project. This project aims at a unified and mutually compatible line of central processors and peripherals, with each participating country contributing its share of hardware and engineering. Hungary builds small computers, remote data-processing systems, intelligent terminals, punch- and magnetic-tape units, printers, disk stores, and modems.

Entrusted with data-processing equipment production are about half a dozen firms, with the 20,000-person Videoton combine the biggest. Besides consumer products like TV sets, loudspeakers, and radios, which account for less than half of Videoton's output, the Budapest company builds the ES-1010 computer, the smallest in the ES series. Also produced are display stations,

This article is the seventh in a series that examines the electronics industries of the Eastern European Bloc, or Comecon.

terminal systems, and printers, some under license from Dataproducts Corp. in Woodland Hills, Calif.


The ES-1010, of which several hundred are said to be operating in the Comecon area, is intended primarily for commercial and scientific-technical applications. Using medium-scale integrated circuits, the system performs some 300,000 operations per second. Its main store, expandable to 65 kilobytes, is based on ferrite-core technology and the microprogram store on read-only-memory devices. Access and cycle times are reported at 0.9 and 1.1 microseconds, respectively. A channel adapter serves to interface the 1010 with other ES computers and peripherals.

"Not all of our systems are related to the ES project," says Tamás Haris, head of technical coordination at Videoton Corp., which handles the company's foreign trade activities. As an example, Haris cites the 1005, a small system in production for about two years and destined for exports, "we hope also to the West." There are two 1005 models in Videoton's equipment lineup: the two-cassette 1005-50 office computer with a matrix printer and a data display, and the 1005-70 intelligent terminal, also with a printer.

TV sets, too. For all the attention it has given commercial electronic's endeavors, the industry has not let the consumer sector slide. Statistics show 233 color or black-and-white TV receivers per 1,000 population for 1976, with total TV set production at about 300,000 units per year.

Color set production, although small, is picking up fast. From this year's level of 30,000 units, it will jump next year to 50,000, says Edith Nezvál, an economist at Videoton Corp. Her prediction for 1979 is for between 60,000 and 65,000 units.

True to form, the Hungarians are doing well in sales abroad, particularly with black-and-white portable sets in Western countries. "Prime foreign markets," says György Berkes, deputy general manager of Videoton Corp., "are West Germany, Britain, Switzerland, the Netherlands, the Scandinavian countries, and Egypt." TV exports to the West, Berkes points out, are three times those to East European countries. □

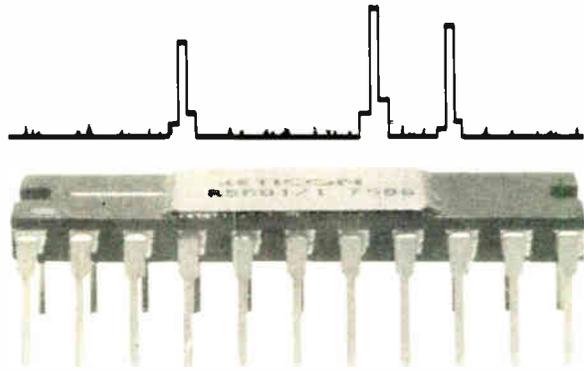

The spectrum analyzer on a chip.

Where else but from Reticon.

What was previously thought impossible will now be an everyday occurrence. Moving up to the next stage of complexity in CCD devices has resulted in the Reticon R5601, a 512 point Discrete Fourier Transformer. This technology offers a spectrum analyzer with small size, light weight, low power, high reliability, and a remarkable low cost. Along with its associated circuitry, it performs the Chirp Z algorithm to give a 256 spectral line display in less than 250 μ sec. It's small enough to fit into your system, yet powerful enough to have a signal-to-noise ratio in excess of 70db. The numerous applications possible include speech recognition, target identification, vibration analysis, bandwidth compression, communications, and general signal analysis.

Currently available is a self-contained evaluation module on two printed circuit cards just 80 square inches. Just hook up your ± 20 volts, display and you're on the air. Use the on-board oscillator or externally control the sampling rate.

The R5601 is the latest in our growing family of discrete time analog signal processing devices. All available through our worldwide network of over 20 distributors and more than 70 salesmen.

Discover the IC that does it all.

RETICON®

AN  COMPANY

910 Benicia Ave • Sunnyvale, California 94086
(408) 738-4266

Companies

TRW logic devices spawn a division

New LSI operation hits jackpot with its first product,
a 160-ns bipolar multiplier developed to 'prove the technology'

by Larry Waller, Los Angeles bureau manager

After years of searching, TRW Electronics finally has something going in the glamour end of semiconductors. Named the LSI Products division, it features what are acknowledged as the fastest commercially available logic devices. Equally pleasing, however, to TRW corporate brass and officials at TRW Electronics is where it started.

Organized in 1976 from scratch at the Defense and Space Systems Group, the operation struck instant paydirt with its first product. But swift market acceptance of that device—a 16-by-16-bit, 160-nanosecond bipolar multiplier, holding 18,000 components on a chip and performing more than 6 million operations per second—spurred growth too rapid for the space- and military-oriented group to handle.

“Our initial motive was just to prove the technology, not immediate profit,” recalls Ralph W. Miller, general manager of the new LSI Products division.

Ironically, TRW had had the perfected bipolar circuit (called triple diffusion, or 3D) since about 1968 and had been turning out small quantities of it for space and defense jobs. “It was the classic problem of LSI,” Miller explains, “more functions on the device than the user needs.” So TRW planners picked out an application area demanding more raw speed, lower power, and more miniaturization than offered by any other device: digital signal processing, or the real-time filtering of digitized waveforms.

Despite its success, this device is already being improved, since it “represents 1973 technology.” Two new versions are due early next year.

One will have a speed of 100 ns, and the other will have an accumulator function added to the same chip, enabling it to do 10 million operations per second.

Because managing an advanced bipolar organization is different from running other TRW components operations (their products include rectifiers, connectors, and circuit boards), officials devised a unique relationship. Miller serves as the chief link with the parent systems group, which still handles all the wafer fabrication, expanded device assembly, testing, and research and development. Fabrication, in fact, is likely to stay at the Redondo Beach, Calif., facility, because an automated manufacturing operation can turn out as many as 250,000 0.8-inch-square chips a year, adequate for a long while. But a separate assembly-test building is planned.

Smoothing the transition to the new division is a familiar name in the industry, Theodore H. Maiman, inventor of the laser and also TRW's Electronics Group vice president


charged with bringing in new technologies. LSI Products reports through Maiman to George Hart, general manager of TRW Electronic Components divisions. The point, says Hart, is that “we're not mixing it in with everyday business. It's separate and reporting to me as far out as I can see. In five to six years, it can develop into one of our largest divisions.”

Other products coming. Miller insists his division “is not just a multiplier company,” but also offers a line of 8-bit data converters and shift registers, including a 256-bit, 40-megahertz unit. Furthermore, the division is likely to bring out more arithmetic elements, such as adders and subtractors. “Really, these are building blocks of general use.” Maiman concurs, adding that the line should be regarded as “not components, but subsystems.”

There are other possibilities besides signal processing, the market for which Miller admits is hard to pin down specifically because “it needs so much speed and complexity that it is relatively untapped.” For instance, there are the allied jobs of digital switching and processing video digital signals. But Hart, Maiman, and Miller agree on one place TRW will not be: in microprocessors or mass memory.

By moving the operation out of a military environment, TRW is easing the way to profitable long-range commercial development. But a pitfall could be the inevitable competition. Among others, Advanced Micro Devices Inc. and Monolithic Memories Inc. are known to be eyeing TRW's market preserve and polishing suitable products. □

New baby. The first device from TRW's new LSI Products division is this multiplier. Chip, 280 mil², holds 18,000 devices.

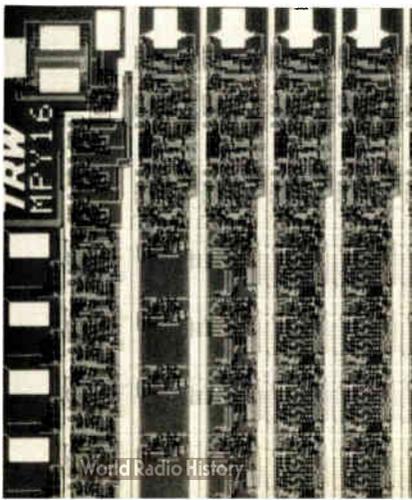



Sooner or later it was bound to get out.

Yes, the Dumb Terminal™ really does have two smarter brothers.

At first, they weren't quite as well known, because their Dumb Brother's smashing success was stealing the show. Although they had been selling quite well along, even without getting constant headlines, like their Brother.

Now, however, Dumb Brother has pulled them into the limelight. And ADM-1 and -2 have decided, after all, that perhaps it's time you knew a little more about how smart they really are.

ADM-2 is the more intelligent of the two, providing you with flexibility of format, security, editing, interface, and transmission. You'll find, among a variety of other outstanding features, up to 8 screen status indicators and a numeric key pad. And a detachable keyboard with 16 function keys. Which give you the ability to access your special program, or form, or instruction.

The ADM-2 is also available in a model compatible with your Burroughs TD-800 Series. The ADM-2B. The ADM-2B adheres to the standard Burroughs poll and address line discipline.

On top of all that, we've made the ADM-2 micro-programmable. And taken all the mystery out of the procedure. Which makes user-micro-programmable simple, quick, and cost-effective. The ADM-2's versatility is limited only by your imagination.

You could call the other Smarter Brother, ADM-1, the "with-or-without" terminal. Starting with some pretty smart standard features, like a standard 24-line display, a field protection feature with dual-intensity and switch-selectable operating modes — block mode and conversation mode — you build up from there. With options like a hardcopy printer interface, and display editing capabilities (line insert, line delete, line erase, character insert, and character delete). Just add the options you need, and leave the rest of the "bells and whistles" for someone else. That way, it's more systems adaptable. And it's up to you just how smart you want it to be.

The Smarter Brothers have it all. Intelligence, appropriate functions, and sensible cost-performance.

So, you might as well get used to seeing more of the ADM-1 and -2 in the future. Because we suspect they're going to be in the spotlight from now on.

After all, there's really nothing wrong with exposing your Smarts.




The dumb terminal's smarter brothers.

"Siliconix VMOS are down. Bipolars'

"VMOS power FETs, introduced by Siliconix in 1975, have always been better than bipolars—more rugged, more reliable, faster and simpler. Today, we're lowering our prices as we move further along the learning curve, and our economical plastic package brings superior VMOS technology within reach of all designers. At 96¢ apiece,* the new TO-202s will replace bipolars in a broad range of power applications, particularly in interfacing with computers and in telecommunications."

*VN46AF in quantities of 100–999

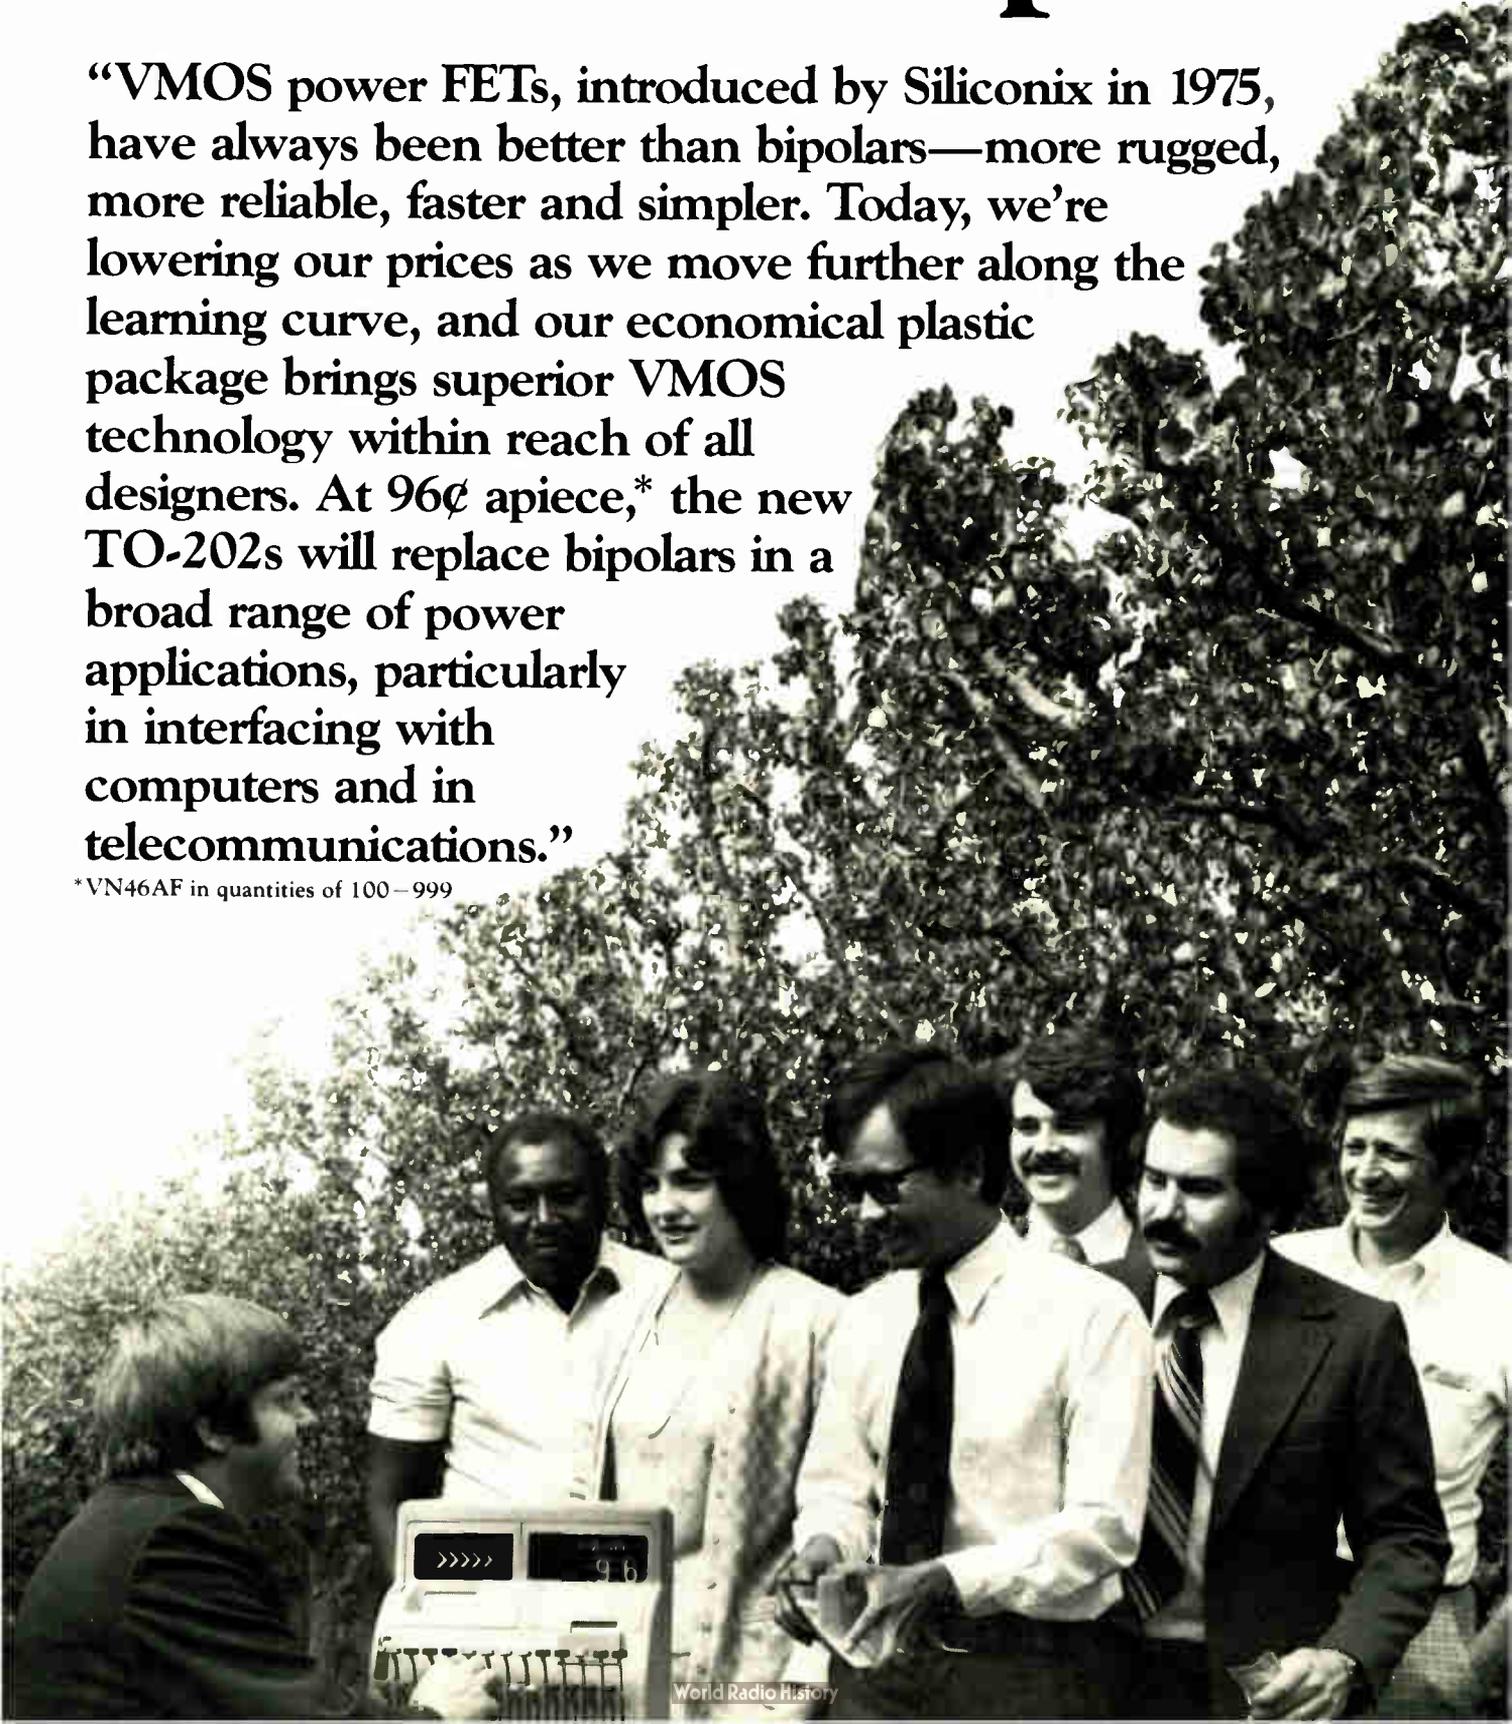


power FET prices time is up.”

Siliconix VMOS power FETs in plastic:
TO-202 package

Part #	$V_{DS(on)}$ BV_{DSS} ($I_D=1$ Amp)	Price:1-29	31-99	100-999
VN46AF 40	3.0V	\$1.33	\$1.12	\$0.96
VN66AF 60	3.0V	\$1.39	\$1.16	\$1.00
VN88AF 80	4.0V	\$1.54	\$1.29	\$1.10

All three devices are guaranteed over the temperature range of -55°C to 150°C ; their maximum power dissipation is 12.5 watts, and their current rating is 2.0 amperes.



Other VMOS power FETs introduced by Siliconix are also available:

Part #	Package	P_{DISS}	BV_{DSS}	$V_{DS(on)}$ ($I_D=1.0$ Amps)
2N6656	TO-3	25W	35	1.8V
2N6657	TO-3	25W	60	3.0V
2N6658	TO-3	25W	90	4.0V
2N6659	TO-39	6.25W	35	1.8V
2N6660	TO-39	6.25W	60	3.0V
2N6661	TO-39	6.25W	90	4.0V

“Until 1975, MOS field-effect transistors (FETs) were restricted to small-signal, low-power applications. To control high currents, designers used bipolar devices. Then Siliconix, using Vertical MOS technology, introduced the VMOS power FET — combining the reliability of FETs with the power of bipolars.


“Today, Siliconix’ new plastic TO-202 package means that VMOS power FETs are not only superior to bipolars in performance, but also competitive with them in price. They’ll simplify designs and reduce component count in most systems because they eliminate pre-amplifiers, driver transistors, and external protective circuitry required for bipolars. And they can be inserted by machine, a time- and cost-saving advantage in high volume production.

“Anyone who has designed with bipolars knows the failures that can result from thermal runaway, secondary breakdown and current hogging. You don’t have to worry about these problems with VMOS power FETs; their positive temperature coefficient eliminates hot-spotting and provides uniform current density, making them fail-safe. Consider how this inherent reliability will reduce your system interruptions and maintenance costs. And VMOS power FETs are faster than bipolars in switching operations — as much as 100 times faster. With all these advantages packed into the low-cost TO-202, you’ll be able to eliminate bipolars’ problems completely from many system designs.

“The high input impedance of VMOS and its threshold voltage range allow it to interface directly with CMOS, MOS and TTL logic families. And the VMOS power FET is the only interface device with a switching time comparable to that of ECL, so it will interface with a simple

level shift — without losing speed. These features make the TO-202s ideal for data processing applications: computer peripherals, micro- and minicomputer systems, and process control equipment. They’re also ideal for use in telecommunications: as telephone relay replacements, Touch-Tone muting switches, audio amplifiers, central office systems and analog switches.

“Our new line of VMOS power FETs in plastic may mean the end of the line for bipolars. We want you to discover for yourself how they can improve system design, so use the coupon to send for our detailed brochure. To order parts, contact any of our franchised distributors: Alliance, Century, Components Plus, Future, Hamilton/Avnet, Industrial Components Inc., Pioneer Standard, Pioneer Washington, Quality Components, Semiconductor Specialists, Wilshire, Wyle/Elmar, Wyle/Liberty, or RAE.”



Yes, I want to find out for myself how Siliconix put bipolars on the list of endangered species. Please send me your brochure.

Name/title _____
 Company _____
 Address _____
 City/State/Zip _____

Siliconix Incorporated,
 2201 Laurelwood Road, Santa Clara, CA 95054,
 (408) 246-8000.

 Siliconix

LOGIC-ANALYZER ORIGINATORS

CHARLES H. HOUSE



B. J. MOORE



CITED FOR TESTING INNOVATION

1977 Award for Achievement

One problem, two men, two solutions: yet both designers were right; both of their designs were needed. So Charles H. House of Hewlett-Packard Co.'s Colorado Springs (Colo.) division, and B. J. Moore of Biomation Corp. in Cupertino, Calif., developed two markedly different diagnostic instruments that were the first such electronic tools for studying, designing, and troubleshooting complex digital logic circuits and systems.

It was September 1973, at the annual Wescon show in San Francisco, when the electronics world got its first glimpse of what House and Moore had accomplished. HP brought its 1601L, a logic-state analyzer that displayed binary notation in 1s and 0s. It was intended primarily for examining software program steps or conditions on a data bus. Biomation introduced its 810-D, a logic-timing analyzer for recording, displaying, and analyzing complex timing relationships.

Together, these two 10-megahertz analyzers were major innovations in instrumentation. They gave rise to a whole new class of instruments operating in what is called the data domain, where designs more often are based on digital words or data as a function of time or sequence, than on voltage as a function of time or frequency. Logic analyzers serve the data domain in the same ways that oscilloscopes have

served the time domain and spectrum analyzers have served the frequency domain.

For House, the first inkling of the problems facing digital-systems designers surfaced in late 1969 when he was investigating the use of computer-systems architecture to define a digital-processing oscilloscope program. "We were having significant difficulty debugging the DPO prototypes," he recalls.

House, circuit engineer Duncan Terry, and others working on the scope asked one another: how are other digital-systems designers, who are using serial-data interfaces and multiplexed data buses able to design and debug their gear? "It didn't take us long to discover others were having the same problems we were," he says. "It's a miracle that minicomputer makers could develop systems before such tools [as the logic analyzer] were available."

After checking with HP divisions making desk-top calculators and minicomputers, House continues, "we consequently said: 'The world

doesn't need a DPO that prints out rise time and pulse width to four decimal places. Rather, it needs some simple diagnostic tools.'" Thus, HP cancelled the digital-processing oscilloscope program in early 1970 and set up an investigation of the need for digital test equipment.

Since data registration was the biggest problem House and his associates faced on prior projects, that became the first feature they set for a scope-like tool for digital-systems designers. Important in achieving this feature, House notes, was the pioneering work in parallel-pattern (AND-gate) triggering and digital delay done by HP applications engineer Ralph Reiser for the digital-processing oscilloscope.


Soon added to the list were serial-word recognition and linking trigger statements. Data-acquisition structure was clearly a problem. Realizing that many channels of data were needed without significant degradation, "we put considerable effort into miniature, multiple-channel probing schemes where one adjustment controlled voltage threshold on all channels and tightly controlled timing skew between channels," he says.

By now it was late 1970 and Hewlett-Packard was developing the HP-35, its first hand-held calculator. Discussions that House had with engineers on the cal-

The 1977 Achievement Award

For major instrumentation innovations that meet a vital need in the growing field of digital-systems design, the editors of *Electronics* have designated Charles H. House, engineering manager for logic-analyzer programs at Hewlett-Packard Co.'s Colorado Springs division, and B. J. Moore, president of Biomation Corp., as co-recipients of the magazine's fourth Achievement Award. The 1977 winners were the key figures in the development of the first logic analyzers. HP's 1601L, a logic-state analyzer, and Biomation's 810-D, a logic-timing analyzer, gave rise to a new class of instruments operating in the data domain.

The 1601L is a plug-in unit for HP's 180 series oscilloscopes, giving a 12-channel, 16-word-memory logic-state analyzer for 10-megahertz operation. The 10-MHz 810-D digital logic recorder stores 256 logic states on each of eight channels, displaying waveform-like timing diagrams on an oscilloscope.

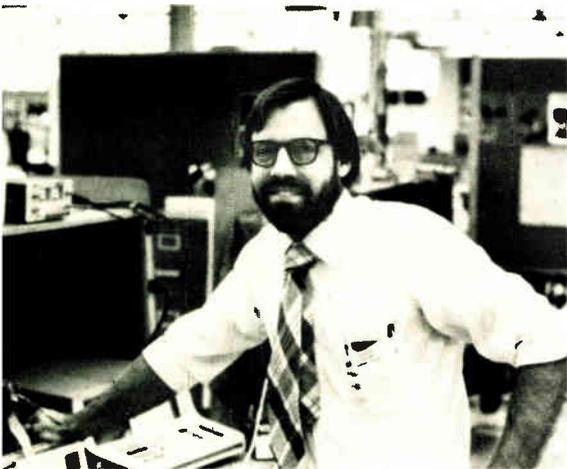

CHARLES H. HOUSE

Semiconductor development almost was the career choice of Chuck House, engineering manager for logic-analyzer programs at Hewlett-Packard Co.'s Colorado Springs division. But upon graduating in 1962 with a bachelor's degree in solid-state physics from the California Institute of Technology, "I soon discovered that diffusion furnaces and Schrodinger's wave equations and I weren't compatible," he says in retrospect. "The semiconductor indus-

try just wasn't my calling."

Happily for HP and for digital-systems engineers, House quickly settled upon the instrumentation world as his calling. During his senior year, one of his instructors had argued that instrument manufacturers must design and build equipment that is ahead of the state of the art if they are to measure the state of the art. "That fascinated me," says House, who had immediately sensed a challenge.

Since then it has been a 15-year career with Hewlett-Packard—the first two years in Palo Alto, Calif., with the oscilloscope research and development group, and the rest in Colorado Springs, Colo., where the oscilloscope operation moved in 1964.

House, who says he was "damn lucky to get out of Cal Tech," has picked up a master's degree in electrical engineering from Stanford University and a master's in the history of science and technology from the University of Colorado. Now 37 and married, he is the father of three girls and a boy, "none of whom shows any signs of becoming an EE," he says.

The House family lives near the plant in a spacious California-Spanish home. He designed the house, adapting it to the Colorado climate. Because he could

not afford to build the home he wanted, he "chopped out the extraneous rooms." So there is no living room. But there is a 7-by-44-foot hallway, which helps him avoid walking into walls when he gets up in the middle of the night, keeps the lights off so as not to disturb anyone, and heads downstairs to grab a snack or do some writing.

Perhaps his nocturnal habits explain why House is known for his late morning arrivals at HP. But he is known for other things, too. He is coholder of two logic-analyzer patents relating to digital delay and pattern triggering and has two more logic-analyzer patents pending. He also was the circuit designer on Hewlett-Packard's model 1402 wide-band vertical amplifier plug-in and on several other scope products.

House also takes pride in a plant nursery—"one of the best two or three in the Rocky Mountain region"—that he owns and operates in his spare time. He tends to spread his bountiful curiosity over a wide range of interests and is harassed by details. What's more, he concedes, "I've been known to be sharp-tongued and acerbic, impatient with others when they don't see what I do. But on balance, I prefer to think I'm pretty well liked by those that understand me."

culator effort led to the addition of two more criteria to the list of features for the proposed digital diagnostic instrument.

First, the data-entry method had to be compatible with the way digital designers describe their problems. This led to a definition of state time, state sequence, and algorithmic state flow as the primary measurement parameters of interest. It also led to the second additional feature: to present the data collected with this multichannel data-indexing scheme in a way meaningful to digital-systems engineers.

To provide these features, "we wrestled with many things," says House. Eventually he and project leader William Farnbach settled on writing parallel words left to right, with event flow going from top to bottom.

Another feature the House-led team sought to provide was an overview of the system dynamics, and, again, several displays were considered. Possible formats included memory-address space on the Y axis and event time on the X axis and,

"the one most liked early and eventually settled on," a simple matrix of the most significant byte on the Y axis and least significant byte on the X axis. This feature was working by late 1971, House notes, but it did not appear until early 1975, in the 1600A 16-bit logic-state analyzer.

Although the 1601L was the first complete logic-state analyzer, some of its features were in at least two predecessor instruments. In early 1970, Digital Data Corp. of Allentown, Pa., built and marketed the Diana, a two-channel-by-32-bit serial-data analyzer. House bought nonexclusive patent rights for HP. Independent of the work of House's group, many concepts from Diana were being used in the model 5000A serial-data analyzer in development at HP's Santa Clara (Calif.) division.

For Biomation, the development of 810-D logic-timing analyzer was less perplexing than the experiences of House's team. In fact, the cycle from idea to product was six weeks. The basic concept first came to Biomation engineers in 1971, after conversations with major makers of

mainframe computers. Late that year, explains Moore, Biomation began planning to develop an instrument with eight logic-channel inputs for high-speed (100-MHZ) digital recording. When work on the recorder began in early 1973, the instrument had been redefined as an eight-channel 200-MHZ recorder. It was introduced as the 8200 in 1975.

"In August 1973, I got an idea that my subconscious told me was a good one," recalls Moore. "I knew if a market existed for the 8200, there just had to be one for a product more modest in price and performance."

While inputs for the 8200's development came from computer makers, "nobody ever came to us and said he needed a low-speed box. It was 98% intuition," Moore says. "The basic data world, at that time, was still operating at 1-MHZ transfer rates, so I felt a 10-MHZ logic analyzer did, in fact, have a role in the market."

The very next day he began to marshal all of Biomation's staff members to develop the 810-D and get it to market as quickly as possi-

Bill Moore would agree that it is a long way from pulling apart radios and being unable to put them back together to developing a ground-breaking piece of electronic instrumentation. But for the president of Biomation Corp., it was a natural way.

He is not quite sure what his unsuccessful teenage tinkering had to do with it. "All I know is that I liked math and science and just signed up to become an engineer when I went to college," says the 41-year-old native of Sharon, Tenn. With bachelor's and master's degrees in electrical engineering from the University of Tennessee in 1959 and 1960, he plunged straight into instrumentation design.

The first decade of Moore's career was spent almost entirely in his home state working for three small instrumentation companies. As a nuclear instrumentation engineer at one firm, he developed a data-acquisition system for nuclear and chemical applications. At another company, he developed a line of digital instruments, such as counter/timers, and output drivers for data-acquisition systems. At the third, he was chief engineer on a very-high-speed multichannel pulse analyzer.


Despite these accomplishments, Moore says he came to feel he was

better at managing than at the detailed design of products. His belief is a major reason for his move to Biomation in 1969 as engineering vice president. "While I don't like details, I'm not bored by them," he remarks. "But, if I were a carpenter, I'd be a framing carpenter and not a finishing carpenter." However, his development of the 810-D logic-timing analyzer took as much finishing as framing.

He says the experience he gained from working at small companies, wearing several hats and seeing the various roles of engineering and marketing people, helps him to be a good manager and understand and empathize with the problems those departments face at Biomation. He also can quickly settle on the feasibility of a project. "Once I make a determination," he says, "I feel comfortable and don't worry about it. Worry is largely nonproductive."

With his two teenage daughters and wife, Moore lives in a medium-sized house in Monte Sereno, about 35 miles south of San Francisco. "It's a very rural atmosphere," he says: chickens, quail, rabbits, cats, and dogs populate the two-acre plot.

He spends most of his free time taking care of his property and animals

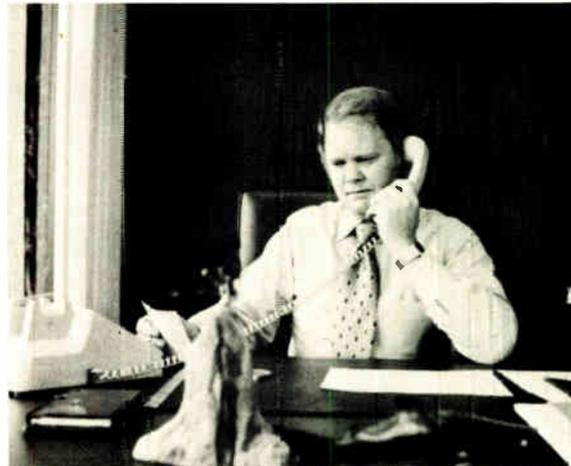

B. J. MOORE

or working hard at becoming proficient at trap-shooting. Similarly, he sets high targets for himself in business, and he finds goal setting "very invigorating." He does not hesitate to come down on people whose performance fails to measure up to their promises—because, as he puts it, "the bottom line counts." However, "you don't have to be ruthless to be successful," adds Moore, who believes he and others "achieve what we decide we can."

ble. "I went to our engineering department and told them I wanted a 10-MHz logic analyzer. They said, 'Okay.' But when I said I wanted it by Wescon, just six weeks away, they told me it was impossible. I then asked if anyone wanted to do it, and when they all refused, I said, 'Okay, then I'll do it.'"

The deadline made development hectic. Moore, who joined Biomation in early 1969 as the firm's third employee and engineering vice president, had assumed the presidency in 1971. In August and early September of 1973, he spent his days running the company and his evenings developing the instrument. "I was the project engineer," he says. "I did the design, fabrication, and checkout of the prototype, and even wrote the technical portion of the instruction manual."

By no means does he take sole credit for developing the 810-D. "It was a case of team support rather than team leadership," he says. In those weeks before Wescon/73, "I had tremendous support from our engineering and manufacturing de-

partments. There was a lot of overtime for scores of people." The marketing of the instruments, he adds, "was superbly done, for a small company. [Marketing manager] Dave Blecki and his people took a new concept and ran with it."

Although Biomation has since added binary notation of the logic state as a feature in some of its newer logic analyzers, that approach was never considered for the 810-D, notes Moore. House says HP did not adopt the logic-timing-diagram method "primarily because we were concentrating on the bus-transaction information of algorithmic-state-ment changes, and not electrical parameters of an asynchronous system."

For Biomation, the 810-D's development "made the company what it is today," Moore says. "It made a step function in our growth and allowed us to participate in the whole logic-analyzer field." Perhaps more important, "it was extremely significant to industry, particularly in an economic fashion. It was a relatively inexpensive solution to a truly major class of problems."

Their manufacturers have replaced the 810-D and the 1601L with newer products, and Moore thinks that the future of the logic analyzer is bright. "I believe it is the most significant instrument to come on the market since the oscilloscope," he says. What's more, "I think we'll see a long and very exciting evolutionary process for logic analyzers as their capabilities and performance increase for a long time to come."

House concurs: "Digital electronics is going to be so pervasive in our society, in terms of controllers and computational capability in things that affect us all, that the measurement equipment to support their design, manufacture, and assurance of correct performance is destined to become an integral part of the digital-electronics revolution. In 20 years, I suspect the data-domain analysis technique will be the cornerstone of the digital-electronics industry, just as frequency-domain analysis techniques have been the cornerstone of the communications industry from its inception." □

Total cpu control
High level command keys and binary/hexadecimal displays provide complete system control, easy operation.

Worldwide portability
 μ Scope 820 is fully self-contained, with accessory storage space. Operates on all standard U.S. and worldwide power sources.

Preprogrammed diagnostics
Overlay memory socket enables designers to plug in and execute customized diagnostics for each end product.



Breakpoint control and trace memory
Built-in high level diagnostics speed and simplify isolation of even the most difficult system problems.

Human engineered
Extensive prompting simplifies operation for test and service personnel, minimizes training time.

Interchangeable front panels, personality cards and personality probes
 μ Scope 820 adapts to a variety of microprocessors. Probe plugs directly into system microprocessor socket.

Intel delivers μ Scope™ 820. Finally, a diagnostic instrument just right for the Age of the Microprocessor.

Troubleshooting microprocessor systems is easier than ever with Intel's new μ Scope™ 820 Microprocessor System Console. It's a powerful, programmable, fully portable real-time diagnostic instrument. And it's designed specifically to speed and simplify system checkout of your microprocessor-based products.

μ Scope 820 is really the first test instrument of its kind. It's built around its own microprocessor, to provide a "smart" solution that's highly sophisticated, yet easy to use. Because it's user programmable with interchangeable plug-in ROMs or PROMs, it's like taking a design engineer along on every service call. And because it's fully portable, the μ Scope 820 console goes wherever the action is—to the design lab, the production line or into the field.

Unlike logic analyzers, the μ Scope 820 console provides a genuine solution for test and service personnel. It provides the same inside look at system operation that you get with a logic analyzer. But the μ Scope 820

goes far beyond the mere collection of data. Its internal microprocessor system can actually analyze the data it collects. It does that with diagnostic programs you design specifically for your end product.

Rather than passively watching system operation, the μ Scope 820 console lets you execute application programs or diagnostics you develop, in real time or single steps. And it provides full breakpoint capability and a large trace memory.



High level command keys, operator prompting, and binary/hexadecimal display of all system registers, I/O ports and memory give you greater control and make it easier to use than any other test instrument.

Until now the only way to get this kind of diagnostic capability was to use your Intellec® Microcomputer Development System. Now we've taken the Intellec features that have proven most useful for field service and production-level system checkout and have packaged them in this self-contained 20-lb attache case. That's portability.

And we've enhanced that portability with a μ Scope 820 price of just \$2000,* complete with personality probe and all accessories. So you can afford to put a μ Scope 820 console wherever you need one, and free your development lab instruments to concentrate on development. No longer must you invest in in-house-designed custom test instruments for each of your end products. And the μ Scope 820 console will be available with a selection of front panel overlays, "personality" cards and system probes to support a variety of microprocessors.

To get your copy of our μ Scope 820 brochure and to arrange for a demonstration right in your lab, contact your local Intel distributor or sales representative. Or write: Intel Corporation, 3065 Bowers Avenue, Santa Clara, California 95051. Telephone (408) 987-8080. In Europe contact: Intel International, Rue de Moulin à Papier, 51-Boite 1, B-1160, Brussels, Belgium. Telex 24814. In Japan contact: Intel Japan, K.K., Flower Hill-Shinmachi East Bldg. 1-23-9, Shinmachi, Setagaya-Ku, Tokyo 154. Telex 781-2846.

intel® delivers.



*Domestic U.S. price only, quantities 1-10.

For more information circle 87

For information and demonstration circle 86

Incredible performance... at unbelievable prices!




TRW hybrids shatter the price/performance barrier for RF output power, linearity and dynamic range!

You'll have to see it to believe it! And we're ready to show you proof. Take a look at some of our typical applications. Look at the gain quoted for each.

Then take a look at the price. Now, in your production units, you can get the performance you'd only expect from precision laboratory gear.


TRANSMITTER DRIVERS:

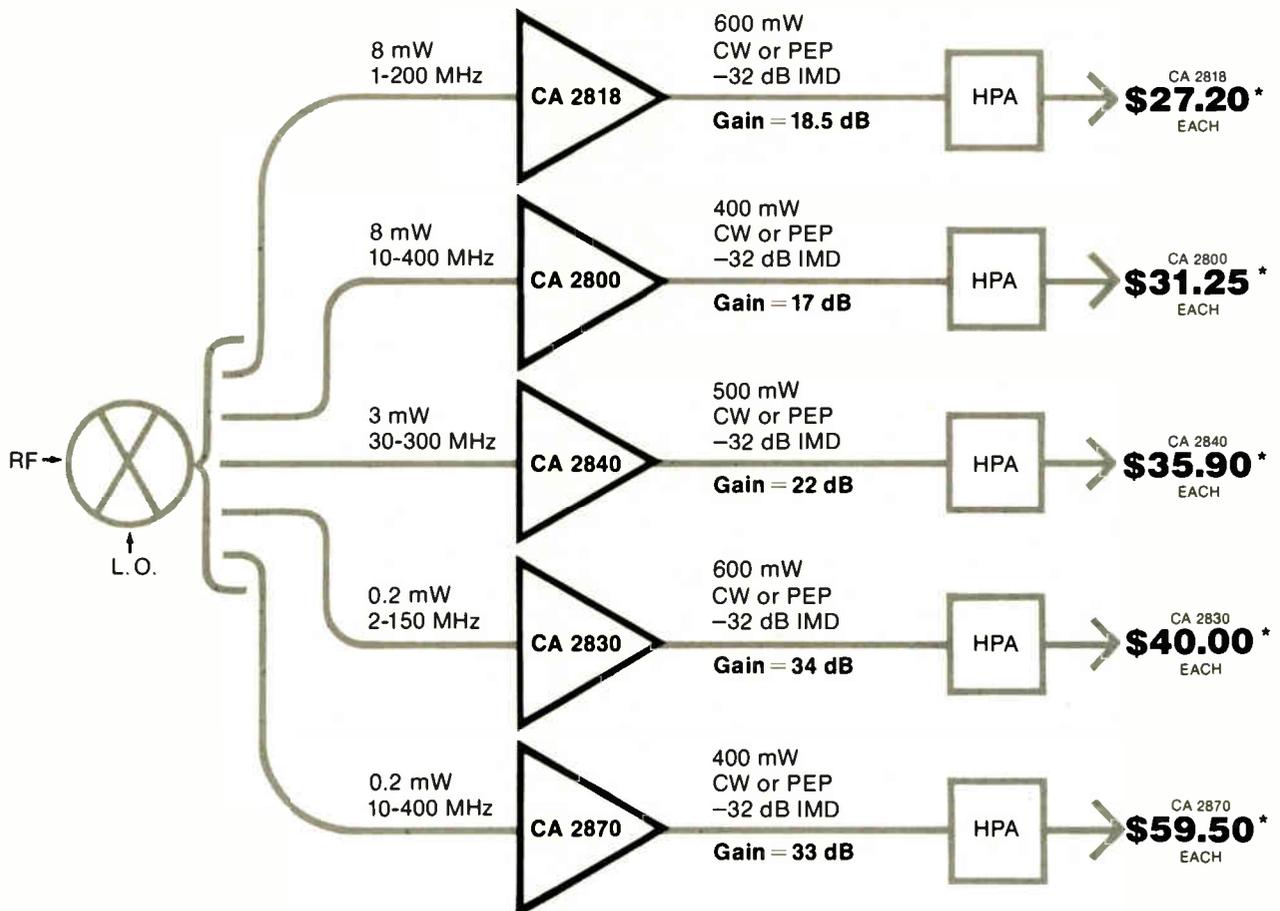


RECEIVER APPLICATIONS:

40 MHz to 100 MHz IF amplifier.


STANDARD IF

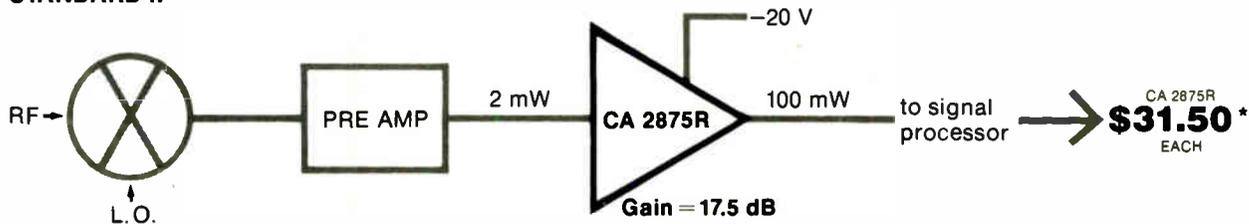

HIGH PERFORMANCE IF

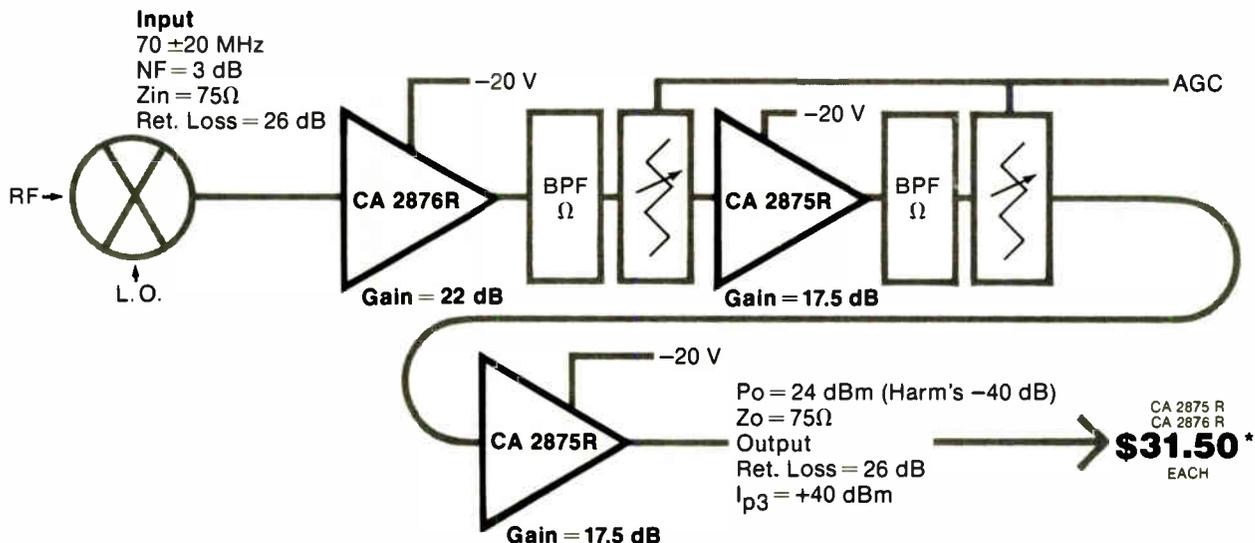

INSTRUMENTATION APPLICATIONS:

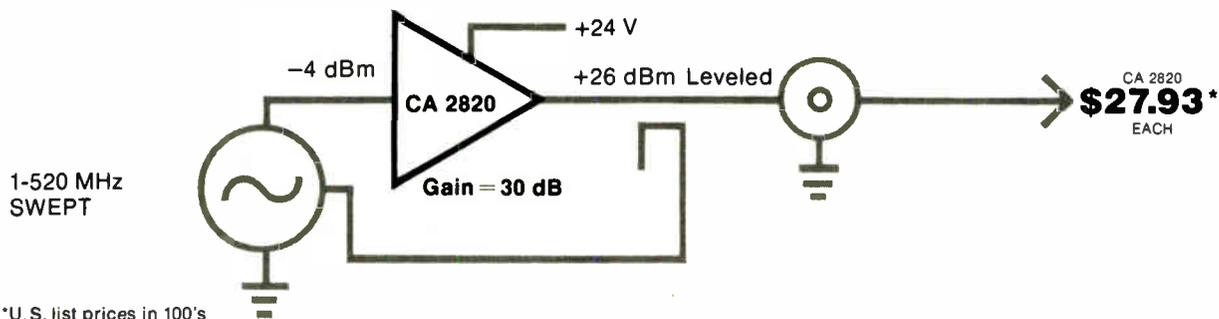

*U.S. list prices in 100's

These applications are only the beginning. TRW RF linear hybrids can revolutionize design after design... with incredible performance at unbelievable prices. Let us prove it. To get complete data sheets, send us the coupon.

To find out how you can get a free sample and test fixture, call Don Feeney at (213) 679-4561.

TRW RF Semiconductors

An Electronic Components Division of TRW, Inc.
14520 Aviation Boulevard, Lawndale, California 90260

- Please send me your new RF linear catalog.
- Please have an applications engineer contact me.

(Phone) _____

Name _____

Position _____

Company Name _____

Address _____

City _____

State _____

Zip _____

E

TRW RF SEMICONDUCTORS



ANOTHER PRODUCT OF A COMPANY CALLED TRW

TECHNOLOGY UPDATE

In any ordinary year, the seasoned observer of the electronics scene can count on significant advances in technology that will radically affect the direction of product development. By that standard, 1977 must be considered an extraordinary year.


In semiconductors, for example, the 4,096-bit and 16,384-bit memories have become established products; and memory technology stands on the frontier of the 65-k and 262-k realm. The advent of the one-chip microcomputer is accelerating the application and acceptance of computer power in a host of new areas of application. Nor is the end in sight—already semiconductor development is moving briskly toward still denser chips and still higher performance, under the impetus of newly emerging fine-line processes.



Along with the microprocessor revolution, a major new direction is being forged for instruments—logic analyzers and other specialized instruments in the data domain. In communications, large-scale integration and optical fibers are beginning to have a discernible impact on systems. In computers, minis with extended capabilities are threatening the dominion of mainframes; in consumer electronics, technology nurtured both by the public's restless search for diversion and by the exigencies of fuel and pollution control has spurred the advent of programmable video and nonvideo games, video tape recorders, and intelligent (almost) television sets, along with computers in autos. In sum, the remarkable progress in 1977 indicates no sign of slackening.

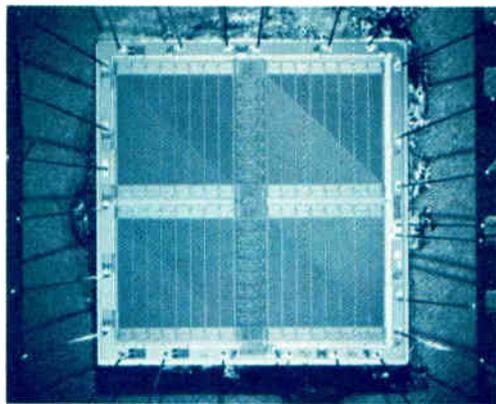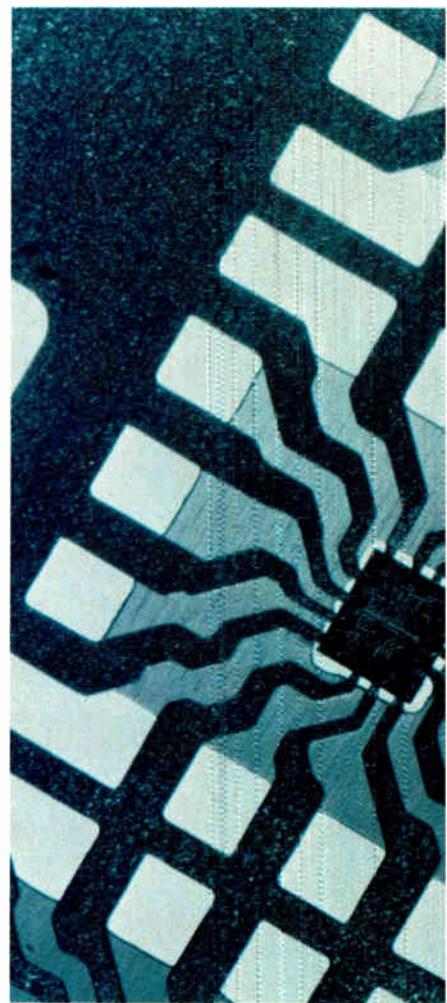


Contents

Semiconductors/92
Memories & Microcomputers/96
Computers/104
Components/112
Instruments/120
Communications/126
Packaging & Production/134
Consumer/140
Chronology/148

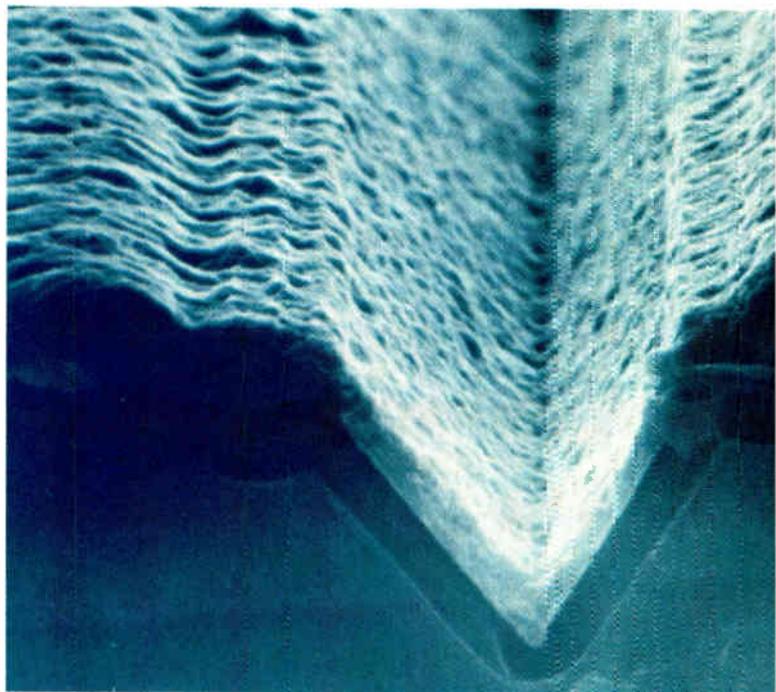

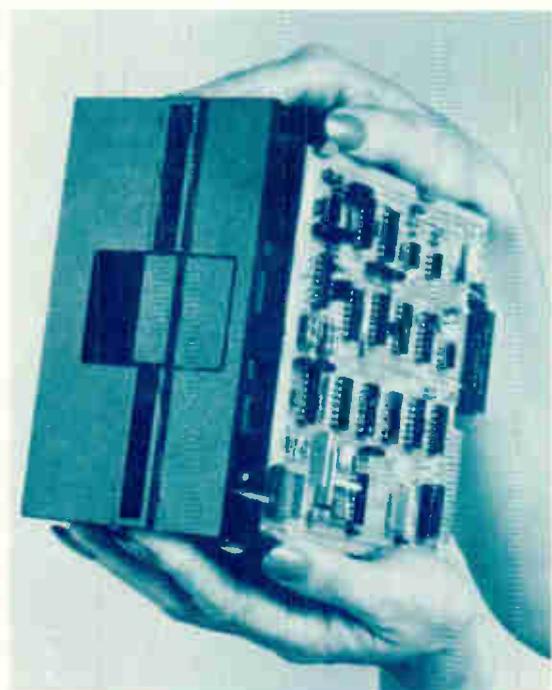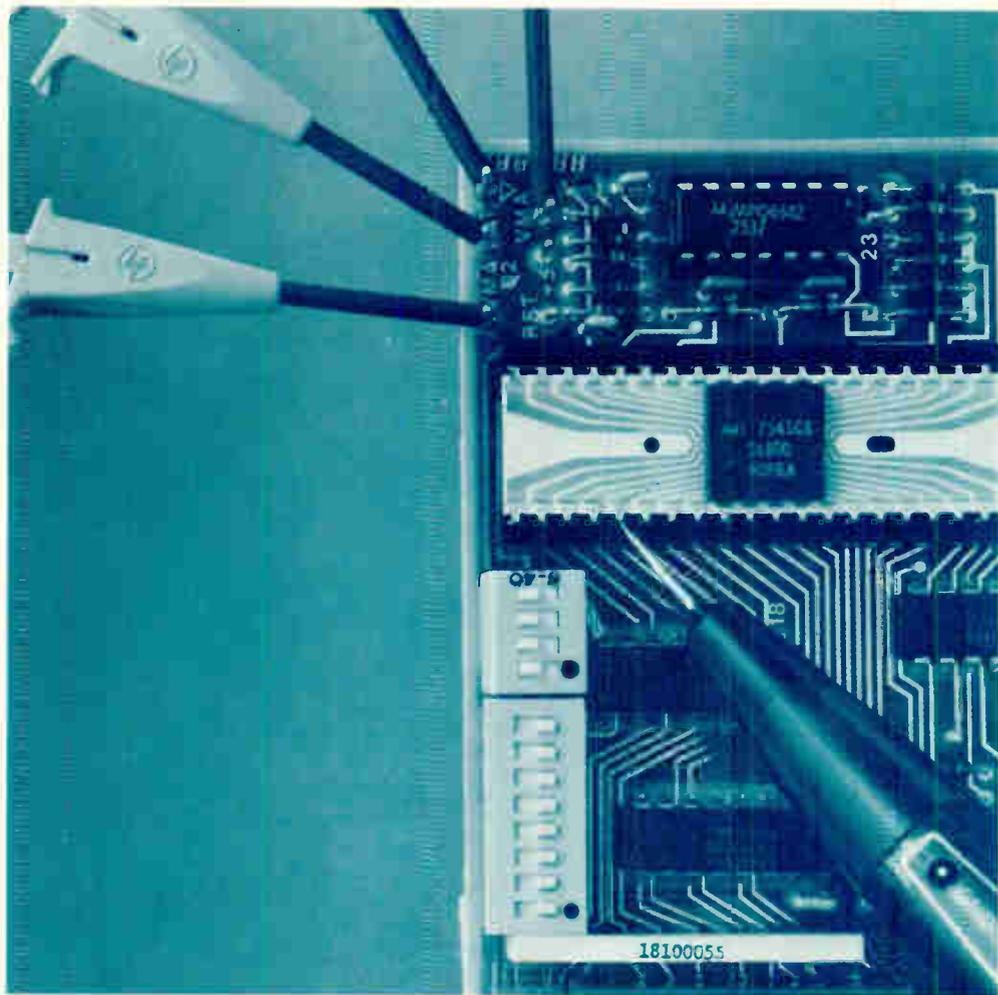

SEMICONDUCTORS

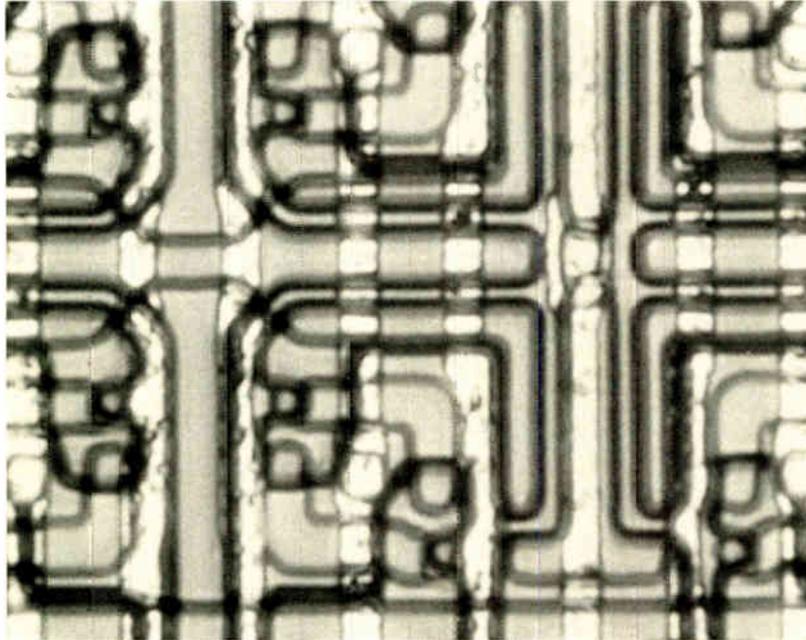

Pushing performance. This microphotograph shows a section of Intel's 50-nm 4,096-bit static RAM built with a 4- μm MOS process. This is the year when short-channel MOS processes such as this one will reach production in both memory and across the LSI logic products spectrum. The result: new levels of performance for next-generation digital semiconductors.

NEW MOS PROCESSES SET SPEED, DENSITY RECORDS

by Laurence Altman, *Solid State Editor*

□ In semiconductors, a component and subsystem technology is on the verge of becoming a high-performance systems technology. For if the last year or so saw the optimization of established products like 4,096-bit and 16,384-bit random-access memories and 8- and 16-bit microcomputers, the next 12 months will witness the birth of processes leading to very-large-scale integration: 65,536- and 262,144-bit read-only and random-access memories, fast 16- and 32-bit one-chip computers, and VLSI peripheral chips performing entire process-control and telecommunications functions.

In short, 1978 will be a signal year in digital electronics. For the semiconductor manufacturer, it will be a time when advanced, high-risk, VLSI process technology, costing tens of millions of dollars to develop, must be put into production. For the system and equipment designer, it will be a time of radically innovative redesign around these VLSI components. Indeed, what happens in the next 12 months will determine how electronics components and equipment will be built, who will build them, and what new markets they will serve throughout the next decade.

Already key semiconductor manufacturers are jostling for a dominant position, as five high-performance VLSI processes emerge. As yet, it is too early to predict which

process will capture the major portion of next-generation digital designs, but it is already possible to foretell their relative effectiveness for different applications.

The technique in widest development among American manufacturers for next-generation devices is a scaled-down, high-performance version of standard silicon-gate MOS processing—Intel Corp., Santa Clara, Calif., dubs its version H-MOS.

What makes scaling an MOS device so attractive is the familiarity of the procedure. For 20 years the industry has known that a semiconductor device's performance and density increases geometrically as the dimensions of the circuit elements are shrunk. So the trick has been to reduce the channel length, gate-oxide thickness, junction depth, and so on of their circuit elements. (For a complete discussion of device scaling, see the special report on the new LSI processing, *Electronics*, Aug. 18, p. 91). At Intel, H-MOS devices have at most 4-micrometer channel lengths, 600-to-700-angstrom gate-oxide thicknesses, and junction depths of less than 1 μm —all about one third to one half the size of these parameters in 1976 silicon-gate devices. The result is triple the performance of the old MOS devices: a 1-picojoule speed-power product, as against 3 pJ for 6- μm MOS.

Intel has already applied this 4- μm H-MOS process to a

4,096-bit fully static RAM, the 2147, which is as fast as bipolar RAMs but consumes 500 milliwatts instead of at most twice that much. Moreover, the H-MOS process lends itself with no loss of speed to power-down designs, in which unselected RAMs can idle at a mere 50 mW, a particularly attractive feature for large static systems.

The rapid success of Intel's 4- μ m MOS process has caused the rest of the industry to evaluate and in some cases accelerate its scaling programs. Mostek Corp., Carrollton, Texas, for example, who from the beginning has scaled its n-channel, depletion-load MOS process, is already using a 4- and 5- μ m single-5-volt process in new high-performance 4104 static RAMs and 3870 one-chip microcomputers. According to Robert Proebsting, MOS device designer, Mostek's policy is to scale devices to the limit that is consistent with high reliability. "There's nothing magical about it," says Proebsting. "We have been doing it for years, and we will continue doing it where appropriate."

Similar n-MOS programs are under way at Motorola Semiconductor, Texas Instruments, National Semiconductor, Signetics, and Fairchild Semiconductor. They are at various stages of applying scaled-MOS processes to all sorts of LSI products: microprocessor central processing units, LSI peripherals, read-only memories, erasable programmable ROMs, and dedicated chips, such as telecommunications coder-decoders, random control logic, and consumer circuits for games, television sets, citizens' band radios, and so on.

Such an instantaneous, across-the-board exploitation of a new technology is unusual, but in this case it happens because H-MOS and the other scaled processes are a direct extension of proven silicon-gate processing. Nevertheless, scaled devices are more expensive to build, needing smaller integrated-circuit patterns and stricter and more complex processing. Hence the question: does the revised process improve enough upon the density and performance of the standard silicon-gate process to be worth the added expense?

Yes, judging from Intel's instant success with the 2147. In volume, the part will cost about the same as or less than equivalent bipolar RAMs, yet it offers four times as many memory bits. Moreover, applied to microcomputers, a scaled-MOS process will result in a 16-bit CPU that is comparable in performance but lower in cost than minicomputer-type bipolar chips. For complex peripheral functions, such as floppy-disk or cathode-ray-tube controllers, H-MOS processing for the first time supplies a truly high-performance LSI approach—previous MOS or transistor-transistor-logic versions often proved either too slow or too costly for many applications.

But is it reliable?

Cost and performance aside, the tougher question for H-MOS designers is reliability. If a semiconductor device is made small enough, normally negligible second-order effects begin to obtrude and cause nonideal behavior. Eventually, the device's operation suffers from such second-order problems as charge fringing, punch-

NEW MOS DEVICE TYPES COMING THIS YEAR			
Type	Process	Performance	
		Access time (ns)	Power (nW)
4,096-bit fully static random-access memory	silicon gate	125	500
	H-MOS	80	300
	V-MOS	80	300
4,096-bit fully static fast RAM	silicon gate	—	—
	H-MOS	50	500
	V-MOS	45	450
65,536-bit read-only memory	silicon gate	300	500
	H-MOS	250	500
	V-MOS	200	300
16-bit microprocessor	silicon gate	350	600
	H-MOS	250	500
	V-MOS	150	500
LSI peripherals	silicon gate	500	500
	H-MOS	300	500
	V-MOS	300	500
16,384-bit erasable programmable ROM	silicon gate	500	500
	H-MOS	300	500
	V-MOS	300	500

through at low voltages, and threshold voltage shifts.

Fortunately, at the 4- μ m, 600-angstrom level of today's H-MOS geometry, these second-order effects either are still too small to affect reliability or can be fixed with tight process control. The oxide must be kept very pure, and the gate-doping profiles and field-doping regions kept in line with ion implantation. After using these precautions, Intel engineers have found that their H-MOS 4-k RAMs survive accelerated life tests as successfully as any other of their memory products.

The shoot-out

While H-MOS processes are taking hold at many semiconductor manufacturers, an outside MOS technique has emerged that promises to battle them for dominance in many applications. The process is v-MOS, and its developer is American Microsystems Inc., Santa Clara, Calif.

A double diffusion in the channel region allows v-MOS transistors to operate as if they had an ultra-short, 1- μ m channel while they are actually fabricated with relaxed 5-to-6- μ m pattern rules. Thus they achieve high performance without the fine pattern geometry and process stringency of H-MOS.

Moreover, the v-MOS transistors are built on the slanting inner surface of a V groove, anisotropically etched into the silicon substrate to give access to the buried v-MOS source. This use of a third spatial dimension makes for very compact VLSI circuitry, capable of packing about 20% more circuit elements than H-MOS onto a piece of silicon. To top things off, v-MOS transistors, if scaled down to 4- μ m H-MOS rules, will be faster and consume less power. The speed-power product is 0.5 pJ for v-MOS, 1 pJ for H-MOS.

Paper comparisons are useful, but the bottom line to

SEMICONDUCTORS

all this process activity is product performance: speed, power, cost, and availability. The question by now is how quickly and at what cost the new devices—Intel's 4-k H-MOS RAMS and AMI's samples of 1-k and 4-k V-MOS RAMS—can be put into high-volume production. Both types clearly will be more expensive to manufacture than standard 6- μ m silicon-gate devices. But as for which will manage to undercut the other, IC manufacturers and users will be able to make their own evaluations this year, as H-MOS and V-MOS products take their place alongside conventional silicon-gate products (see table).

A Japanese entry

A third MOS technique that may make an impact on LSI design in 1978 comes from Japan. It is D-MOS, a planar double-diffused process that like V-MOS produces seemingly short-channel devices. Manufacturers like Nippon Electric Corp. and Mitsubishi Electric Co. have built 4-k D-MOS static RAMS and 8- and 16-bit D-MOS microprocessors for evaluation in dedicated programs. But these parts are not expected to be sold abroad this coming year.

For export purposes, Japanese manufacturers appear at the moment to be concentrating on short-channel MOS processes, similar to H-MOS. Once developed, these would be used to copy Intel's 2147 plus any peripheral chips and other devices that become U. S. industry standards.

As H-MOS and V-MOS slug it out in center ring, two

more processes will attract the attention of users. They are integrated injection logic and silicon-on-sapphire. While both appear to be useful for dedicated applications, fewer and fewer integrated-circuit specialists feel they represent mainline digital techniques capable of producing a wide range of device designs at most semiconductor manufacturers.

1L has had dramatic success in dedicated LSI designs, such as game and watch chips, telecommunications control circuits, and mixed digital and analog circuits. But it is finding standard digital LSI designs harder to penetrate, except in very high-performance areas. Here, the line of 1L dynamic 4-k and 16-k RAMS made by Fairchild Semiconductor, Mountain View, Calif., are being used in systems requiring access times that are shorter than the 150 nanoseconds available from n-channel MOS devices.

In the running

As for the silicon-on-sapphire process, Hewlett-Packard Co., Palo Alto, Calif., has stayed on schedule with its complementary-MOS-on-sapphire program and has introduced ROMS, RAMS, and a 16-bit CPU into its instrument and computer lines. RCA Corp. is still evaluating the SOS technique for advanced product designs, while other commercial manufacturers continue to show only theoretical interest in developing the process for some applications, at least for the next few years.

PROFILE

The man who added another dimension to MOS

It was October 1975. One of the worst semiconductor slumps in the decade had cut deeply into the profits of American Microsystems Inc. To make matters worse, AMI had invested heavily in the digital-watch business, and it hadn't worked out.

That's why its top management listened carefully when an energetic 28-year-old Ph.D. student from Stanford University's nearby integrated-circuit laboratory told them about a new metal-oxide semiconductor process that, he said, would put the Santa Clara company in the forefront of MOS device technology. Clearly, it would be a gutsy gamble, because the process was based on a radically different device structure requiring circuit elements that were built on the face of a V groove cut into the MOS substrate. It could cost several million dollars and no telling how long to get the process running in production.


Luckily, the Stanford student was a super salesman as well as a shrewd technologist, and he persuaded AMI management to go along with the idea. They are not sorry. T. J. Rodgers produced his first V-MOS memory prototype just six months after joining AMI and his first production-ready 1,024-bit static RAMs only 18 months later—and he did it for less money than anyone had expected.

The result: less than two years after Rodgers started working at AMI, the company has launched a line of V-MOS memory products that leads the MOS industry in speed and density.


Rodgers is quick to give credit to AMI management, especially Donald Trotter, vice president of research and

development and his immediate boss in the early days. "Don gave us the support we needed for doing the job," says Rodgers. "He sheltered the project in times of peril, like the 4-k crash. No matter what was happening around us, we were able to do our own work. Of course, we could be pretty loose in those days since we were pushing one process for one product. All we needed was a few good people working long hours."

Things are different for Rodgers now. As newly appointed head of memory development, he has to get some six different memory products ready for production in a short time. "That takes a lot of product engineers, a lot of test people, a lot of hustling, and a lot of bucks," he says. "The game has changed."

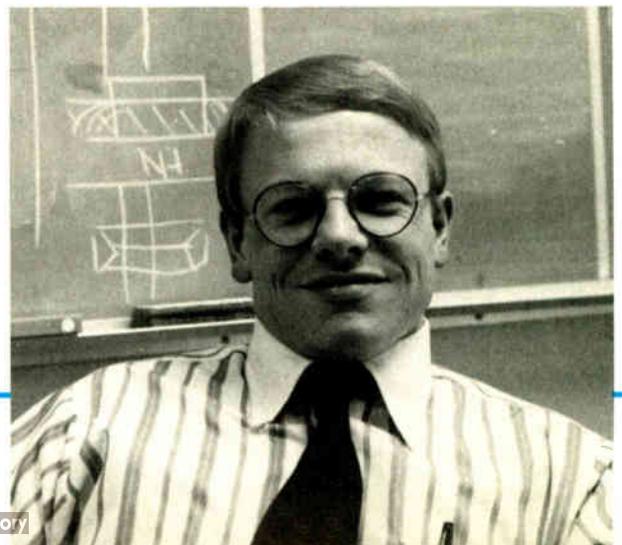

One step closer...

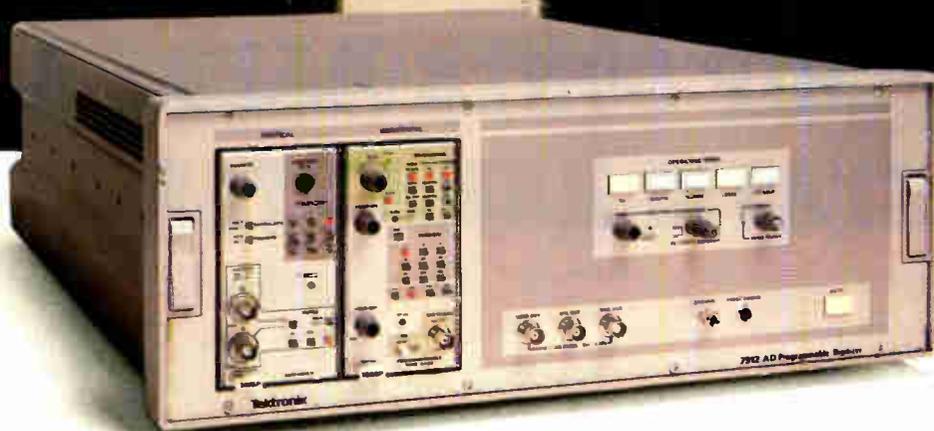

Introducing the Tektronix 7912AD Programmable Digitizer, one step closer to absolute automation of tedious tests and measurements.

The 7912AD brings full programmability of operating parameters to the world's *fastest* waveform digitizer. This state-of-the-art instrument reduces the probabilities of human error and the dependence upon high level, skilled technicians because it can be operated automatically and remotely.

Automatically . . . because at the heart of the 7912AD is a micro-processor which controls the entire sequence of functions as programmed. The 7912AD even checks itself out when it's switched on!

Remotely . . . because interfacing is fully compatible to the IEEE 488 (IEC) instrument bus requirements. control can be exercised by a wide range of calculators, micro and minicomputers. Best results are attained, however, when utilizing the Tektronix CP4165 Controller with TEK SPS BASIC waveform processing software.

Step into the realm of full test and measurement programmability with the Tektronix 7912AD Programmable Digitizer!

Write for free information package; Tektronix, Inc., P.O. Box 500, Beaverton, Oregon 97077, Attention MAG, B. R. Cole; or phone (503) 645-6464, extension 1146.

Yes, I'm interested.

Bring me one step closer today!

NAME _____ TITLE _____

COMPANY _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

SPS-1-977

Tektronix[®]
COMMITTED TO EXCELLENCE

For Technical data Circle 95
For Demonstration Circle 94

95

MEMORIES & MICROCOMPUTERS

TABLE 2: 1978 STATE OF THE ART MEMORY TECHNOLOGY

Device type	Access time (ns)	Active power dissipation per chip (mW)	Application
4-k to 16-k MOS dynamic RAMs	150 - 300	400 - 600	large mainframe and microcomputer-based systems
4-k fully static 2114-type MOS statics	150 - 300	500	peripheral and microcomputer systems
4-k clocked 4104-type MOS statics	150 - 200	120 (30 standby)	peripheral and microcomputer systems
1-k to 4-k fast MOS statics	50 - 100	500	fast mainframe, cache, or microcomputer-based systems
4-k to 16-k I ³ L dynamic RAMs	90 - 125	500	fast mainframe and microcomputer systems
4-k to 16-k I ² L static RAMs	70 - 125	500 (20 standby)	fast mainframe, peripheral, and microcomputer systems
1-k to 4-k TTL/ECL static RAMs	30 - 70	500 - 1 watt	cache
32-k to 64-k MOS ROMs	200 - 500	500	fixed memory and program storage
1-k to 8-k TTL ROMs	50 - 100	700	fixed storage
8-k to 16-k EPROMs (UV-erasable)	500	500	prototype program storage
8-k EAROMs nitride types Famos types	1 μ s 500	500 500	nonvolatile RAM; reprogrammable ROM
64-k CCD memory	1 μ s	500	disk replacement; auxiliary serial memory
100-k to 1,000-k bubble memory	10 μ s	500	nonvolatile disk replacement; microcomputer storage

Source: Electronics

16-kilobit level as manufacturers followed Intel, who invented the device, to higher densities using a more sophisticated 5-v floating-gate MOS, or Famos, process. As for electrically erasable nitride and Famos PROM devices, they too will improve in density and become more attractive in such systems as reprogrammable point-of-sale terminals and TV tuners—systems that require nonvolatile, periodic updating.

For CCD memory, 1978 will be a decisive year. The technology has finally reached the 65-k chip level—a density that makes the cost per bit low enough for system evaluation. Moreover, Fairchild, Texas Instruments, and Intel all will have 65-k devices that are fast

enough (500 ns to 1 millisecond) for many microcomputer applications, where they could be used in place of floppy disks as auxiliary storage; in this case, a page of working data is transferred from the disk to the CCD for handy use during a routine and returned when the operation is completed.

Finally, there are bubbles. TI's 92,000-bit bubble chip, along with peripheral bubble drivers, detectors, and controllers, has finally given the systems designer an opportunity to evaluate this potentially attractive mass-storage technology in prototype systems. Being nonvolatile and equal in cost with mini-floppy storage, bubble systems could be used immediately in floppy-based microcomputer systems as replacements for floppies. Bubbles are now about twice as fast as conventional floppies, but most important, they should decrease sharply in price over the next few years as higher levels of bubble-chip integration (1 million to 2 million bits) become available.

Those powerful one-chippers

The appearance last year of the powerful 8-bit one-chip microcomputer marked a flowering of semiconductor techniques in data-processing applications. Intel's 8048 family, Mostek's 3870, and TI's 9940 are currently the most prominent of these chips, but all have enough processing power and real-time control capability to handle applications that formerly needed more expensive multichip microcomputers. This is especially true of configurations requiring a modest amount of memory but a lot of I/O control. For example, it is now possible to build a complex printer capable of handling many inputs with, say, a single 8048 microcomputer chip and one TTL driver instead of 12 chips from the 8080 family.

The 8-bit types differ in their details. Some are software-compatible with multichip families; others stand alone. Some have UV-erasable program options; others are mask-programmable only; and so on. But they all have in common an 8- or 16-bit CPU and an accumulator stack, 1,024 to 2,048 words of ROM, 64 to 128 words of scratchpad RAM, and ample I/O capability of 24 to 32 lines that is sometimes expandable to 256 lines. Also, they all have fairly powerful instruction sets of up to 70 instructions, including some highly sophisticated routine-interruption capability.

Manufacturers are also working on the low-end 4-bit microcontrollers, as well as shoring up their multichip high-performance line. Rockwell, TI, National, and General Instrument have boosted their low-cost (\$5 and under) 4-bit capability with higher-performing devices. Rockwell Microelectronics offers the largest line of 4-bit microcomputers, the PPS 4/1 family, and has just introduced its newest member, a p-channel MOS chip, the MM76C, that incorporates a programmable counter-timer and analog-to-digital interface logic on the chip. National and TI will be offering n-channel versions of their p-MOS COP and TMS 1000 series, respectively which increase throughput and instruction capability at no extra cost. National, for example, will be offering its

Satisfy Your 8080 Microcomputer Design, Test and Service Needs



MUPRO 80

The complete solution

MUPRO FEATURES

- Real-Time Execution from emulator or users' system memory
- Multi-User/Multi-Task Disk Operating System (MUTE)
- Block Structured Assembly Language (BSAL) and user oriented software packages
- Transparent Control/Display Console
- Compact and ruggedized system packaging

YOUR BENEFITS

- More thorough and flexible system test capability
- More efficient use of software personnel permits simultaneous use by up to four programmers
- Saves software development and maintenance time while retaining the size, speed and flexibility of assembly language programs
- Provides total use of microprocessor. No memory, I/O or interrupt restrictions
- Single system provides total solution to development, test and field service needs

MANUFACTURED BY:


MUPRO

424 Oakmead Parkway
Sunnyvale, California 94086
(408) 737-0500
TWX 910-339-9251



Circle 98 for demo and technical data

Circle 99 for technical data

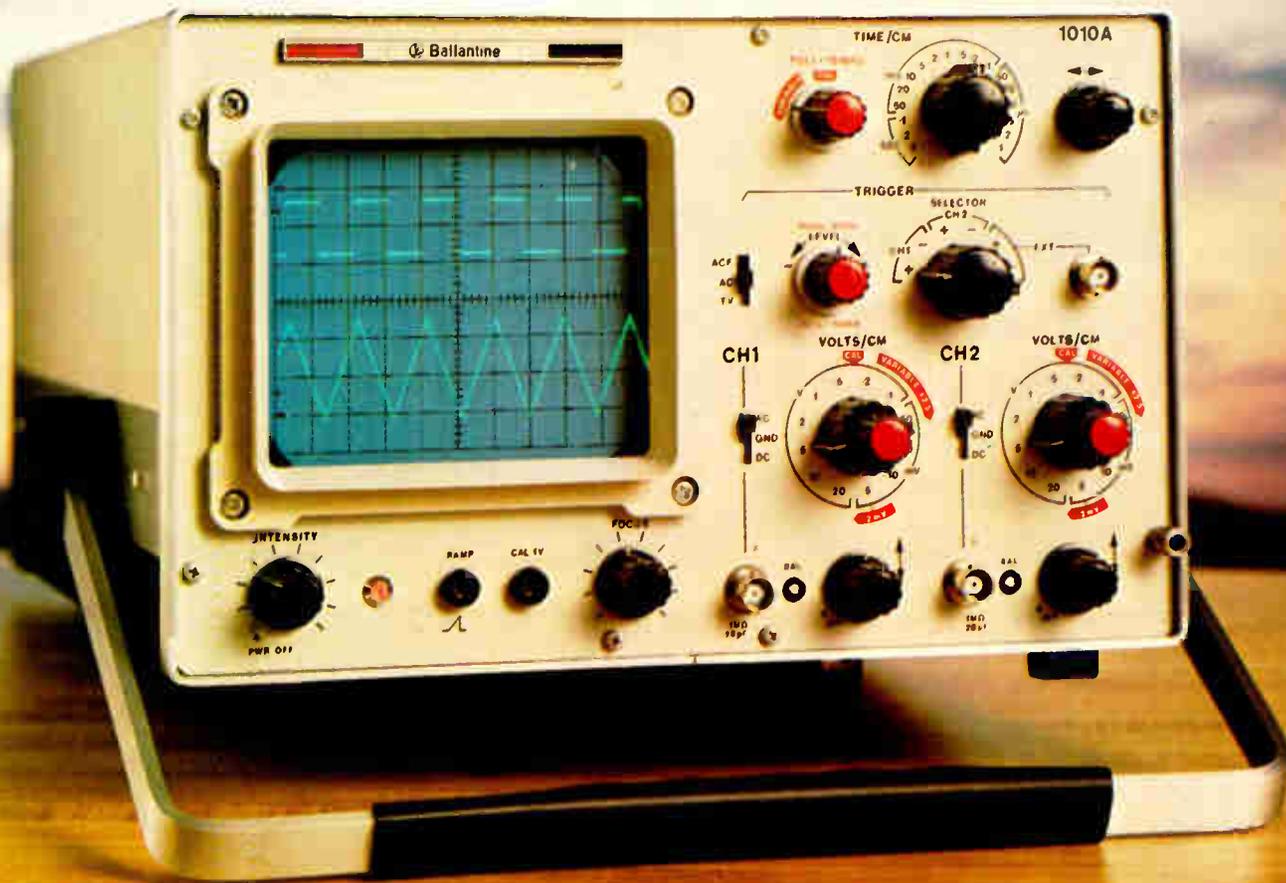

A SCOPE FOR ALL REASONS

Finally a professional oscilloscope to fit your basic needs.
 High quality, easy to maintain, and easy to use.
 Ideal for production, design laboratories, field service and schools.

Ballantine Model 1010A Dual Channel and X-Y oscilloscope

- FREQUENCY:** DC to 15 MHz each channel
 24 nanosecond rise time. 15 MHz full scan
- SENSITIVITY:** 2 mV/cm to 20 Volts/cm
 Continuously variable gain.
- TIME BASE:** 100 ns/cm to 1.25 s/cm
 X10 Magnifier, Trigger beyond 20 MHz
- PORTABILITY:** Only 7 Kg. (15 pounds)
- DISPLAY:** 8 x 10 cm CRT with 3600 volts
- ECONOMY:** \$ 595

Available on GSA Contract GS-00S-04619, Stock Number 6625-00-472-9910.

Circle 100 on reader service card

Ballantine

Ballantine Laboratories, Inc., Boonton, New Jersey 07005 USA

MEMORIES & MICROCOMPUTERS

COP 410, 420, and 440 chips all with a 4-microsecond instruction-execution time.

At the same time that manufacturers are boosting their one-chippers, they are upgrading their multichip families. In response to Zilog Inc.'s Z-80, an enhanced 8080 multichip system, Intel developed its high-performance 8085 three-chip set, which matches the Z-80 in memory capacity, instruction power, and throughput. Now, as other manufacturers move into the high end, they must decide whether to enhance the 8-bit family as Intel did, move straight into the 16-bit minicomputer as TI did with its TMS 9900, or do both. It appears that National and Motorola will enter 16-bit systems, while Intel and its followers will most likely do both.

More important than CPU enhancement, however, is the increased peripheral-chip capability now being offered as part of all multichip families. These peripheral controllers—CRT, data-link, keyboard, floppy-disk, and memory—are more complex than the CPU themselves, containing a high level of processing and local control. For example, the LSI versions of a CRT controller are programmable with system software to handle X, Y, scan, display, erase, and retrigger commands, all with on-chip controls. What is more, these versions do not use up any of the CPU's processing time.

The next level of integration is microcomputer boards, and here chip manufacturers have stepped up their activity, offering families of system-compatible memory, arithmetic, analog, and control boards for use directly with their multichip lines. Intel and Zilog currently lead in the number and variety of digital boards available, while TI and Motorola continue to fill out their lines.

Minicomputer makers with microcomputer products are also very active in new board entries. Besides building up I/O and special-function hardware to fill out their lines of microcomputer boards, companies like Digital Equipment Corp. and Data General Corp. now offer upwardly compatible software that allows users to move from microcomputers right into minis.


Four types of board

In general, new board entries fall into four categories: processor boards, which may be CPU only or CPU, memory, and I/O combinations; memory-extension boards that contain 64 kilobytes or more of ROM or RAM, or combinations of both, with I/O logic (some even have battery backup); special-function boards that perform fast floating-point arithmetic and calculator operations, a-d conversion, or timing functions; and I/O boards that include serial and parallel interfacing, multiline digital inputs and outputs, opto-isolation, and a wide variety of analog I/O functions for both voltage and current signals.

Of the four, the newest type is the analog I/O boards, which eliminate the tedious task of designing the interface between the microcomputer and the analog equipment it controls. They will be especially useful to digital designers who may not be conversant with analog design.

Analog boards are now readily available in a variety of configurations for direct connection to the microcomputer. They are being supplied not only by several microcomputer houses, like Intel, Zilog, Motorola, and DEC, but also by a number of non-microcomputer suppliers, among them traditional converter manufacturers like Analog Devices Inc., Burr-Brown, and Datel Systems

It adds up. For the first time, charge-coupled devices are being used for logic operations. Using CCD configurations, this 8-by-8-bit full adder-multiplier from TRW can perform additions and multiplications needed in complex signal-processing systems.

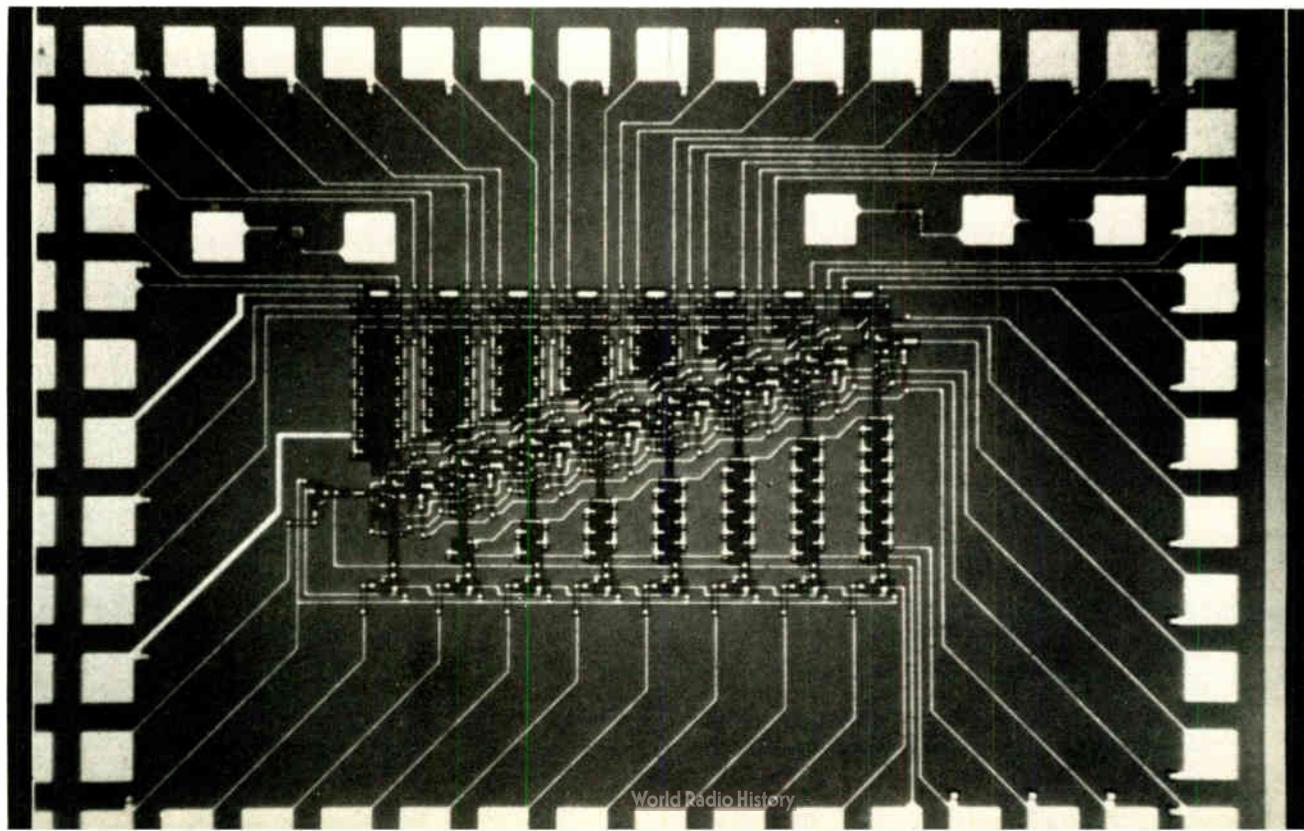

MEMORIES & MICROCOMPUTERS

Inc., as well as specialty suppliers like Adac Corp. and Data Translation Inc.

A newcomer to the field is the very-low-cost board that is taking aim at dedicated control applications. Intel announced an under-\$100 single board based on its 8085 family, for example. Though the board has no bus-interfacing capability, it has ample RAM and ROM for stand-alone applications. TI has added an entire low-cost 16-bit line, the TMS990 series. Its TMS990/100M not only includes a debug monitor in its erasable PROM, but also has a breadboarding section with empty sockets.

Microcomputer designers are also being offered new system capability as evidenced by the appearance of applications software. Programs that manage the execution of microcomputer tasks—the same as used in large computers—are more prevalent and saving designers a good deal of time. These real-time executives are either disk-based or in a relocatable software module that resides in a ROM. Intel's RMX/80, one of the latter kind, requires only 2 kilobytes of ROM.

Development systems

Microcomputer system designers are also enjoying a greater variety of more powerful development systems. Witness the growth of available systems over the last two years, when Intel introduced the first microcomputer development system for its 8080 family. Besides having development and in-circuit emulation capability for its

established 8080 and 3000 microcomputer families, Intel has introduced personality boards this year for the new high-performance 8085 and the one-chip MCS-48 microcomputer family.

Indeed, powerful development systems now exist for all the established microcomputer families, supplied both by the major manufacturers of these lines and by independent instrument manufacturers. Development systems of many types have emerged from chip makers, including Zilog, TI, Rockwell, Motorola, Signetics, and RCA. Zilog's latest system, its program development station, is distinguished as a low-cost alternative to large, multi-user systems—single-disk multiple stations can be added as needed to supply many users. More general in purpose is the new Rockwell mini-floppy-based development system, which offers optional personality modules for use with other manufacturers' processors.

A new source for microcomputer design tools is the instrument manufacturers, whose development systems aim at universality. Tektronix Inc.'s system, for example, supports the 8080, 6800, and Z-80 processors. Mupro Inc.'s system provides for the processors mentioned above and for 8085 development as well. Moreover, it accommodates up to eight designers at once, while other systems in its price range are suitable only for a single designer. Multi-user systems are far more serviceable, and most manufacturers will swing over to them in the near future.

PROFILE

Big achiever on a small scale

It's young engineers like Richard Pashley that make the U. S. semiconductor industry the most innovative in the world. Not yet 30, he has played a major role in developing Intel Corp.'s new metal-oxide-semiconductor process, which he has also used in an innovative memory design. The process is H-MOS, for high-performance MOS, and the design is the 2147 50-nanosecond, 4,096-bit static random-access memory that promises to be copied by practically every semiconductor manufacturer.

Pashley's work at the Santa Clara, Calif., firm in speeding up and increasing the density of standard silicon-gate MOS was what persuaded Intel brass to stay away from bipolar technology for memory design. "The early days of 1974 were particularly challenging for us," he recalls. "I was assigned the task of making MOS as fast as bipolar. At that time the company was looking at all memory processes, including I²L, and the more we compared them, the more we saw that everything they could do with the bipolar techniques we could do better with MOS techniques. We haven't deviated from that path since."

Fresh from obtaining his Ph.D. from Caltech in late 1973, Pashley was given his first job at Intel: to redesign the extremely successful 2120 1,024-bit static RAM for next-generation applications. "It involved both a process change and new circuit design," he says. "To speed things up, we added depletion loads to the process, but we had to do still better to be competitive with bipolar RAMs in cache memory design."

In 1975 Pashley hit on the technique of on-chip substrate back-biasing, which allows MOS transistors to be scaled down in size even further. That technique, coupled with some circuit tricks, produced the first 1-k MOS RAM with access in less than 100 ns and proved to the industry that MOS had a lot of life in it still.

By then Pashley had caught the eye of his superiors, who took him off the 1-k static RAM project and gave him the challenging assignment of developing Intel's next-generation MOS process, not just for memory but for microprocessors as well.

As is common at Intel, Pashley's group moved in methodically but at high speed. "We looked at D-MOS, V-MOS, and other exotic technologies, and the more we looked, the more we saw that scaling our old silicon-gate process was still the best way to get high performance, both for memory and logic applications."

Once scaling down for high performance was decided on in November 1975, Pashley's group really poured it on. It took them about five months to apply the H-MOS process to the old 70-ns, 1-k 2115, resulting in a 50-ns 2125, and another six months to design the 4-k 2147.



It's a stand-alone sweep-signal generator that provides all the performance of much higher priced competitive instruments.

To back up that sweeping statement, consider the following: The Model 2002 sweeps from 1 MHz to 2.5 GHz in four bands with 20 milliwatt output, $\pm 1\%$ display linearity, and ± 0.5 dB flatness. Consider also that it includes an internal 10 dB per step attenuator which in conjunction with a continuously variable pin diode attenuator

results in an output power range of +13 to -77 dBm. Plus a band-stacking option that lets you cover the entire 1 to 2500 MHz frequency range in one sweep. A ± 2 dB amplitude slope adjustment that compensates for frequency dependent variations in test set-ups is also available along with a deluxe marker module containing 1, 10, 50 and 100 MHz harmonic markers that operate over the entire frequency range of the unit. Finally, consider the price: \$2,700 for the basic

unit and only a total of \$3,200 if ordered with the bandstacking, deluxe marker module and slope adjustment options. Compare the prices against those of available competitive units.

WAVETEK Indiana Incorporated,
66 N. First Ave., P.O. Box 190
Beech Grove, Indiana 46107
Telephone: (317) 783-3221
TWX 810-341-3226

WAVETEK®

A sweeping statement about our Model 2002:



Circle 103 on reader service card

COMPUTERS



Deceptive desktops. Looking at first like fancy terminals, this year's desktop computers pack almost as much power, memory, and I/O as some minicomputers. Hewlett-Packard Co.'s 9845 incorporates keyboard, display, cartridge-tape drive, thermal printer with a fast processor, and enhanced Basic compiler. Lots of software packages target turnkey systems for the scientific and financial communities.

MEMORY-ORIENTED DESIGNS MAXIMIZE THROUGHPUT

by Raymond P. Capece, *Computers Editor*

□ In a total about-face, this year the central processing units are racing to stay on top of their smart peripherals' demands. They are also racing to stay ahead of each other—16-bit desktop computers pounding after 32-bit minicomputers that perform easily as well as some mainframe models.

Fueling the whole chase are the advances in large-scale integration that have ballooned memory capacity and produced powerful chip processors. With such hardware at hand, computer designers are at last free to concentrate on system throughput, which they are boosting by increasing instruction sizes, widening data channels, and reorienting architectures to exploit the abundance of cheap memory—whether as caches, lookup tables, or microcoded processor control stores.

Nor are memory-subsystem designers idle. Floppy-disk systems now have the capacities of earlier hard-disk designs, and optical-storage techniques loom, as magnetic memory pushes the limit in density.

Minicomputers in the limelight

This year, advances in system hardware and architecture boosted minicomputer throughput in particular. Some, for instance, turned into better number crunchers through incorporating special arithmetic processors. The

Eclipse C/300 from Data General Corp. of Southboro, Mass., and the 8/16E from Interdata Inc. of Oceanport, N. J., are among those that acquired hardware that does single- and double-precision floating-point arithmetic about as fast as some mainframe computers.

Instruction sets, too, were refurbished, to get more out of the huge new main memories. Several million bytes of directly addressable memory—not the 65,536-bit limit imposed by a 16-bit word—is needed these days, and various memory-management schemes are bringing the 16-bit machines up to scratch, including special 32-bit instructions. The 21MX minicomputer series from Hewlett-Packard Co., Palo Alto, Calif., acquired a dynamic mapping capability that lets it address 2 megabytes if need be. The memory management system of the 16/550 from General Automation Inc., Anaheim, Calif., can handle 2 megabytes, too, and also write-protects selected blocks of data. The model 500 from Prime Computer Inc., Wellesley Hills, Mass., can address 8 megabytes and also provides for virtual memory.

As for speed of access to million-byte memories, just a few kilobytes of bipolar cache can keep it to less than half a microsecond. The trend here is towards larger, less complicated caches as memory cheapens.

In minicomputers with large metal-oxide-semicon-

ductor memories of 65 kilobytes and up, error-detection and -correction coding is becoming either a standard or an optional feature. Although it means adding 5 or more error bits to each data word, the coding corrects single-bit errors and detects longer ones. Digital Equipment Corp. of Maynard, Mass., introduced its PDP-11/60 this year with error-corrected MOS memory as standard and also began offering error-corrected MOS memory as an option on its PDP-11/70.

Nor have the input/output capabilities of minicomputers been neglected. Newly available are high-speed data channels, formerly a mainframe feature, which gives the small machines byte-transfer rates of several megahertz. Direct memory access, sorely missed in IBM's Series/1, is giving other minicomputers the entrée to new areas of real-time processing and providing further opportunities for interfacing to mainframes.

Coming up from below

Such is their success that minicomputers are under attack from below—desktop units that today are much more than glorified calculators—as well as from above—mainframe firms eager to extend downwards.

What with their simple interactive languages and pre-packaged software options, the self-contained, turnkey desktop systems appeal more to scientists and businessmen than to computer programmers—deliberately so. The emphasis of the PCS-II, a product of Wang Laboratories Inc., Tewksbury, Mass., is on business applications. It offers several accounting and billing software packages and for storage has an 89,600-byte minifloppy disk. HP's 9845 is an extremely powerful desktop computer with 210-kilobyte microcartridge storage. It packs this plus a keyboard, thermal printer, and cathode-ray tube into a single case.

Small businessmen received attention from many manufacturers, who see them as a growing market for automated billing and inventory control gear. Software packages oriented towards management abounded, many of them in the business language of Cobol, for which more compilers are being provided. Typical of many small systems brought out this year was the LCC/60 ledger-card desktop computer from Monroe of Orange, N.J. Designed for general accounting, the LCC/60 is simple to operate and has the forms-handling capability needed in business applications.

Notable among the mainframe manufacturers who honored the minicomputer world with their own entries were IBM Corp. with its Series/1 and Sperry Univac with its BC/7. The Series/1, out of the General Systems division, is a 16-bit processor comparable in performance to a DEC PDP-11/34 or a Data General Nova 3/D, as shown in the table. While it is not IBM's first minicomputer—the unsuccessful 1700, which used 6-bit words, was first shipped in 1962—the unbundled Series/1 is destined for a certain market share, despite its initially minimal software.

The launch of Univac's first minicomputer, the small-business BC/7, compounded by Univac's acquisition of

MINICOMPUTERS IN IBM SERIES/1 MARKET						
	Manufacturer / model					
	IBM Series/1 4953 4955		DEC PDP-11/34	DG Nova 3D	HP 21MX-E	
DATA FORMAT						
Word length (bits)	16 + 2 parity		16 + 2 parity	16 + 1 parity	16 + 1 parity	
Fixed-point operand length (bits)	16		16	16	16, 32	
Instruction length (bits)	16		16, 32, 48	16	16, 32	
Floating point	optional		optional	optional	standard	
FP operand length (bits)	32/64		32/64	32/64	32/64	
MAIN MEMORY						
Storage type	MOSFET		CORE	MOS	CORE/MOS	MOS
Cycle time (μs/wd)	0.8	0.66	0.98	0.725	0.7	0.65
Access time (μs/wd)	0.6	0.3	0.51	0.635	0.35	0.325
Minimum size (kilobytes)	16		16	4	4	
Maximum size (kilobytes)	128		124	262	2,000	
Parity checking	standard		standard	optional	standard	
Error correction	no		no	no	optional	
Storage protection	none	standard	standard	optional	optional	
Storage mapping	optional		standard	standard	optional	
CENTRAL PROCESSOR						
Accumulators	—		6	4	2	
Index registers	—		6	2	2	
Direct addressable kilowords	32		32	256	32	
Addressing modes	4		8	6	7	
Control storage (kilobits)	read-only store					ROM, RAM
	6	24	n.a.	n.a.		8.5
Add time (μs)	8.4	2.42	2.03	0.7	1.94	
Hardware multiply/divide	standard		optional	optional	standard	
Hardware byte manipulation	standard		standard	optional	standard	
Battery backup	optional		optional	optional	n.a.	
Real-time clock/timer	optional		standard	optional	optional	
INPUT/OUTPUT						
Direct memory access	n.a.		standard	standard	optional	
Maximum I/O rate (million words/s)	0.8		2.5	1.1	0.616	
External interrupt levels	4		variable	16	60	

Source: Lee Walther & Co.



IBM advances. The IBM 3033 processor offers nearly twice the computing power of the 168-3 it succeeds in the System/370 family, yet it takes up half the floor space. Similar upgrades were offered for the 148 and 158-3 processors with IBM's 3031 and 3032.

Varian Data Machines, announces that the company is in minicomputers to stay. The BC/7 uses bit-slice chips for main processing and several 8080 microprocessors for peripheral control throughout the computer.

Mainframes not idle

The big news in big computers was the announcement of IBM's 3033 processor, which performs about twice as well as the 370/168-3. The computer giant followed that up with the 3031 and 3032, enhanced versions of its 148 and 158 processors, again with about twice their predecessors' computing power.

Also in the news was Amdahl Corp.'s 470V/5, subordinate to the company's popular 470V/6 that competes with IBM's 370/158. The Sunnyvale, Calif., firm also delivered an enhanced 470V/6-II this year. Another firm taking a shot at IBM was Control Data Corp. of Minneapolis, which introduced its Omega 480 series of IBM-compatible computers featuring superior performance at lower cost than models in the 370/135-to-/148 families.

Besides new models, several upgraded versions of established machines appeared as product lines were widened. Burroughs Corp., Detroit, introduced no fewer than eight new models nested in its 800 series and also announced its BSP scientific processor for number-crunching. NCR Corp. added several new computers to its 8000 series, including its 8100 family aimed at the small-business minicomputer market. Marking a thrust toward multiprocessing and networking, the Dayton, Ohio, firm is stressing interactive processing, for example, by adding interfacing capabilities to the V-8560 that simplify the hookup of several terminals.

Foreseeing the spread of distributed-processing systems, some manufacturers have set up guidelines to this application of their product lines. NCR, for example,

has established guidelines that cover link protocols, data-access methods, and intranetwork disciplines. Similarly, HP brought out its DS/3000 and DS/1000 packages of read-only-memory subsystems and software that provide communications throughout any network of HP 1000 and 3000 systems.

Actually, many of the networks termed distributed processing could more aptly be called multiple-task, multiple-user systems, as which they are far more flexible than single-user systems. For example, Honeywell Information Systems Inc.'s DST 6/5000, based on the Minneapolis company's Level 6 minicomputer, supports up to four terminals in a disk-operating system. It resembles NCR's 8200 family and Harris Corp.'s network of 1600 processor family members (to which three new models were added) in that it, too, organizes interactive network approaches and reduces processing bottlenecks by running several jobs simultaneously.

Terminal fever


Aiding and abetting the distributed processing revolution is the evolution of intelligent terminals, some of which approach minicomputer performance. Large-scale integration has added such abilities as text scrolling, as well as the blinking, highlighting, and reverse-video of characters, selectable by the user, that can be found on terminals from Applied Digital Data Systems Inc., Ann Arbor Terminals Inc., and others. For a few dollars more, terminals like Perkin-Elmer Corp.'s Data Systems' 1200 get into editing and forms-generating capabilities.

Further up the line, highly intelligent terminals were brought out with several kilobytes of chip read-only memory for terminal programming and 16 kilobytes or more of user random-access memory. The VDP-400 from Lear Siegler Inc., Anaheim, Calif., uses a bit-slice processor chip set from Fairchild for 16-bit processing capability. Texas Instruments Inc.'s 770 terminal, with a microcartridge tape store and thermal printer, contains the TMS 9900 16-bit microprocessor.

The use of graphics terminals has widened, and the year was particularly significant for raster-scan graphics, which has brighter images and more flexible handling than storage and refresh approaches. Most raster-scan systems require lots of memory, since their picture elements are represented by bits of storage on a one-to-one basis, but cheaper semiconductor RAM assures the technology first place in graphics.

Hewlett-Packard premiered its 2648A raster-scan graphics terminal, which marked the first time a terminal used 16,384-bit RAMs, and it put them to good use in such features as panning, zooming, and rubber-band graphics creation. Ramtek Corp. of Sunnyvale, Calif., introduced its Micrographic terminal, a raster-scan graphics model with full-color display. Just as with HP's, software for graphics can be had for the unit that automatically generates graphs and pie charts.

Printing terminals, though less popular than cathode-ray-tube types, were introduced by a few firms. Texas

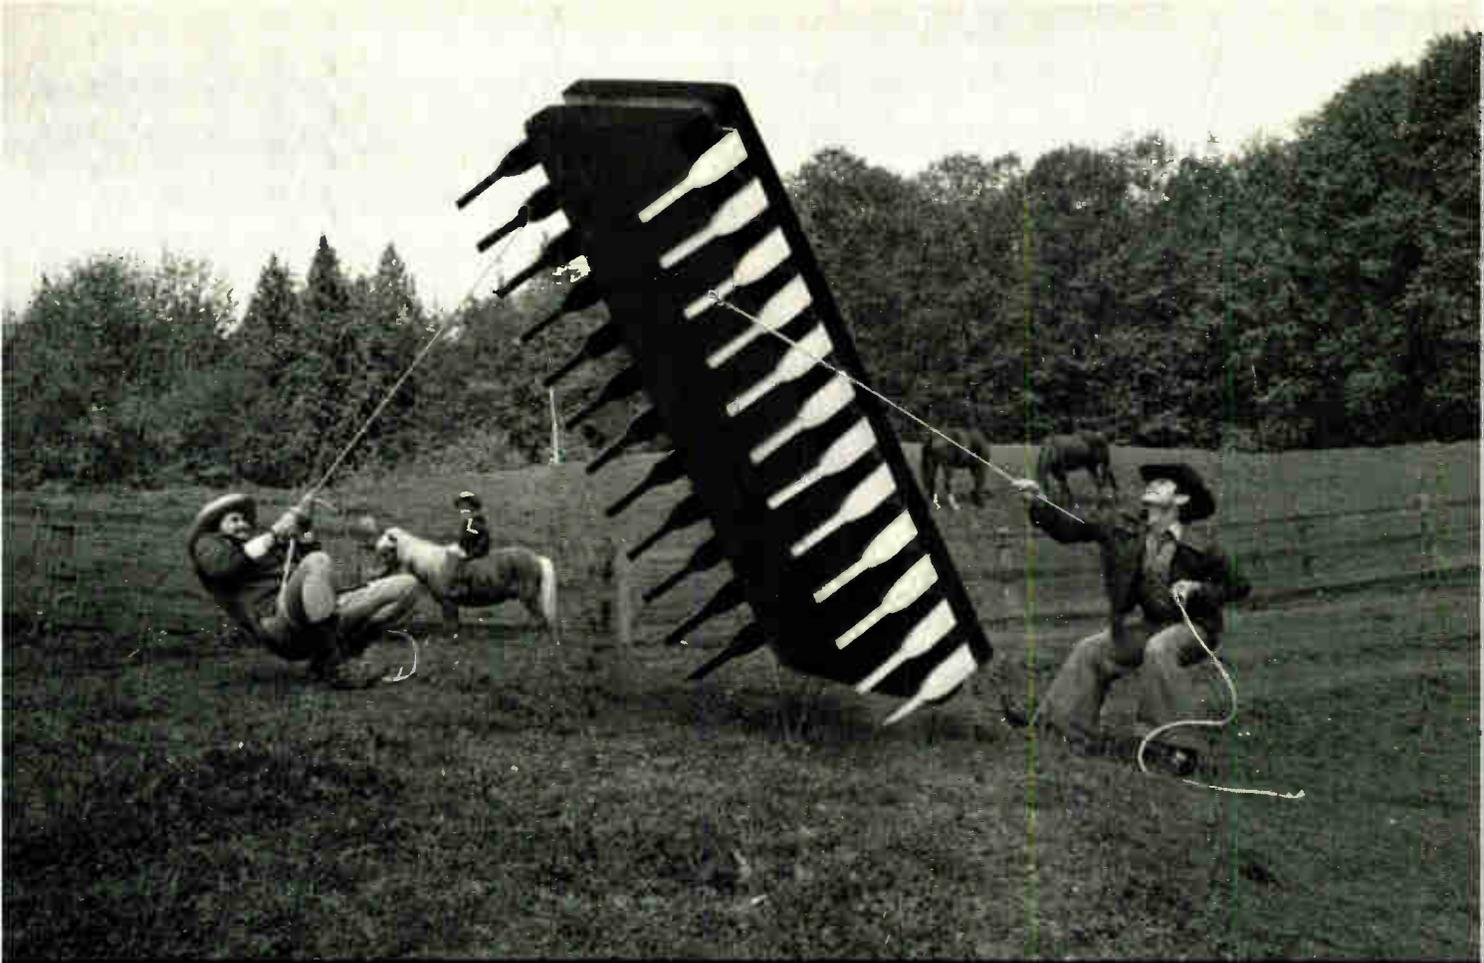

HOLD DOWN PROM SOFTWARE DEVELOPMENT COSTS WITH DATA I/O SYSTEMS.

With Data I/O PROM programming systems you can develop and test PROM programs before committing a single PROM.

You simply load your program into the system using the Data I/O PROM Programmer keyboard or remote interface. The programmer system can emulate any commercially available PROM—including MOS.

You can then review the program as many times as you need to check against truth tables, edit or make changes. Once the program is perfect, you can begin programming with the assurance that the first PROM you program will work.

Data I/O Universal Programmers interface with all microprocessor developmental systems.



Programmers from \$1095.00


**HOW TO SELECT
THE RIGHT PROM
PROGRAMMER
FOR YOUR NEEDS.**

We'd like to tell you more.

This fact filled tabloid gives you valuable information about PROM programming technology. To get your copy, circle reader service number or contact Data I/O Corporation, P.O. Box 308, Issaquah, WA 98027. Phone 206/455-3990

DATA I/O

THE PROM PROGRAMMER PEOPLE.

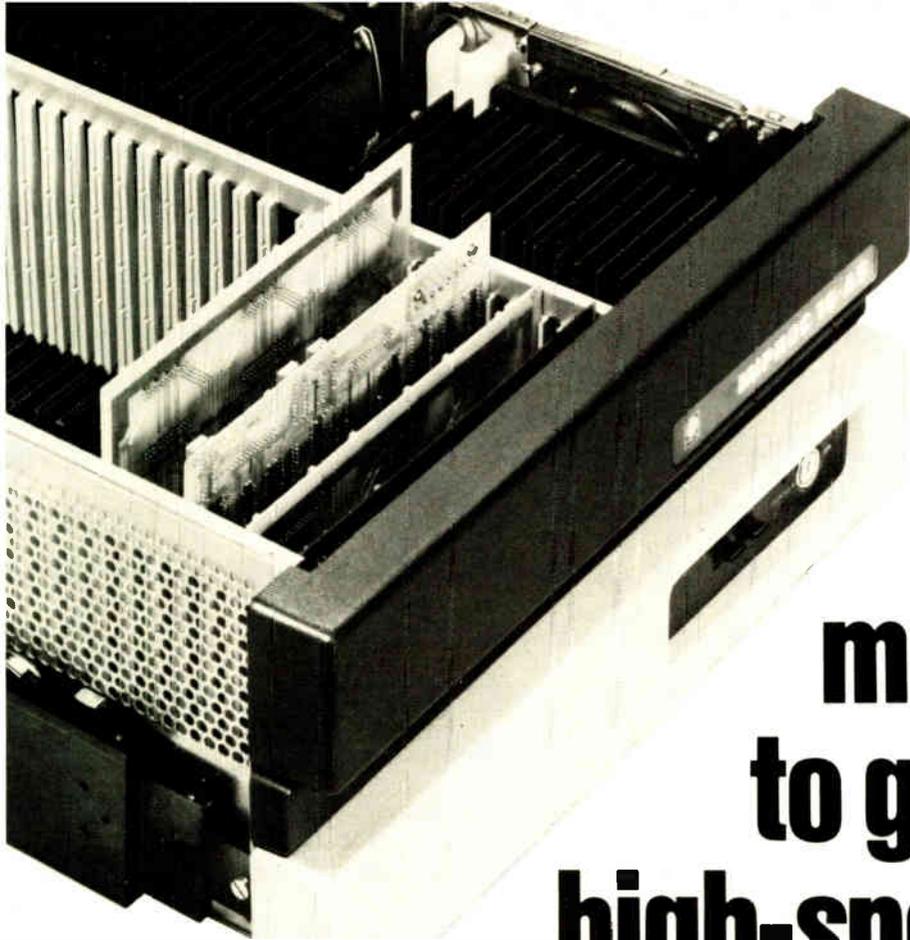

Miproc 16-AS, micropower to give you high-speed faster.

Internationally acclaimed Miproc-16 with a compute-rate of up to 4 million instructions per second is the fastest 16-bit microcomputer card family available.

Now supplied with an OEM chassis package, Miproc-16 is even more quickly brought into action.

This cost-effective application system, named Miproc-16 AS, has room for one, two or even three Miproc-16 CPU's. Smartly styled and equipped with add-in 13-slot card bay modules, fans and power supply, this new OEM chassis package eases the way into high speed microcomputing.

Instruction Power

Up to 170 instructions including multiply/divide and bit manipulation give Miproc-16 formidable processing capability.

16-bit Power

16-bit program words make programming easy. 16-bit data words maintain high precision in arithmetic operations.

Addressing Power

16-bit dual memory architecture gives 65k words of directly addressable program memory *and* 65k words of data memory with 8 powerful address modes.

Interrupt Power

Multilevel, priority vectored interrupt system handles context changes in less than 2 microseconds.

I/O Power

256 directly addressable I/O channels with data I/O rates of up to 1.7 megabytes/sec. under program control, and up to 20 megabytes/sec. for DMA.

High Speed Processing Power

The unique dual memory architecture combines with high speed Schottky TTL technology to execute most instructions in a single machine cycle.

Software Power

Easy to use cross-assemblers for mainframe or minicomputer make programming faster, *and* P1-MIPROC, a super-efficient high level assembly language.

Hardware Power

Comprehensive range of processor, memory and interface cards backed up by sophisticated hardware development aids.

Ruggedized Power

Miproc can be configured to meet any known military specification.



**PLESSEY
MICROSYSTEMS**


Phil Burnley,
Plessey Microsystems,
1641 Kaiser Avenue,
Irvine, California 92714, USA.

Tel: (714) 540 9931

David Garrison,
Plessey Microsystems,
Suite 408, 11141 Georgia Avenue,
Wheaton, Maryland 20902, USA.

Tel: (301) 949 1664

9/ 654 PP044

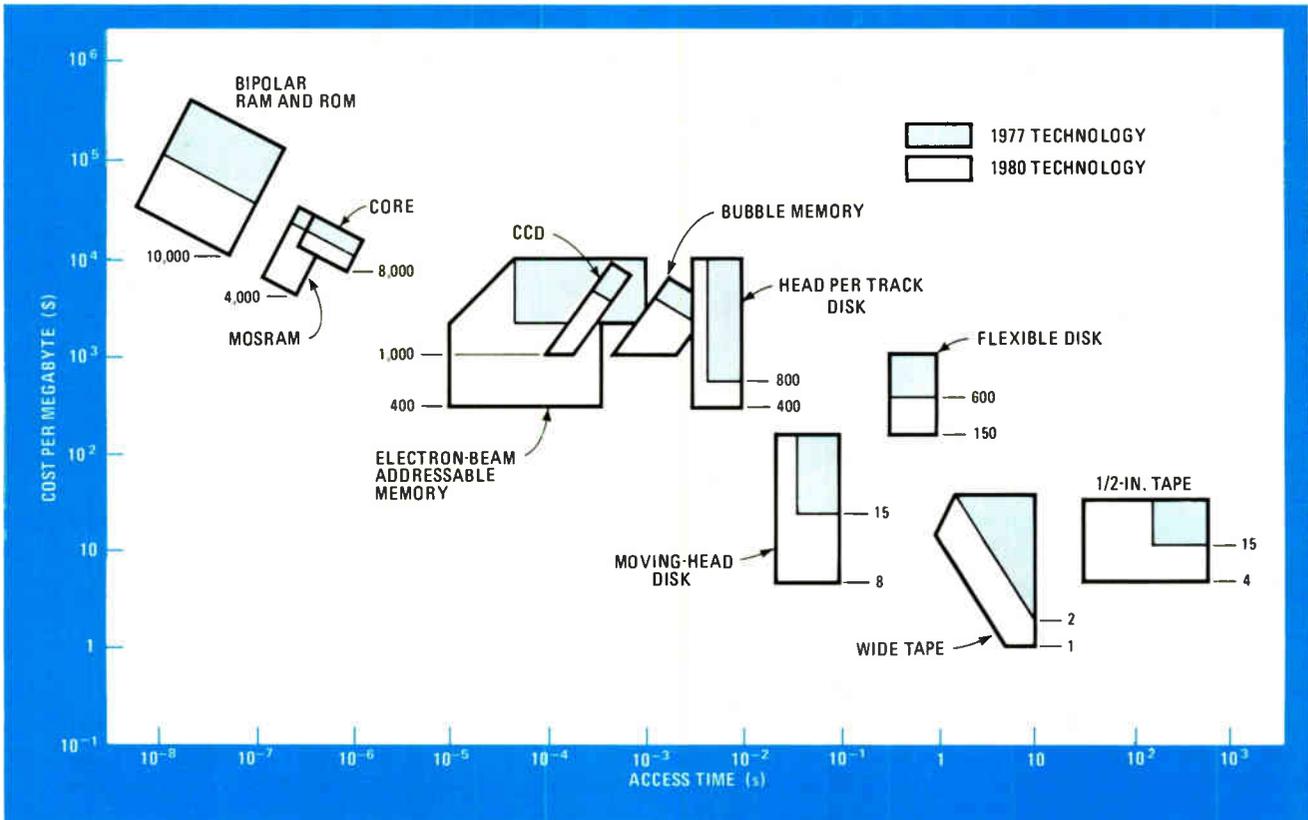

Memorable future. Reductions in cost and access time are coming to nearly all memories, as predicted by Control Data Corp. Solid-state devices are constrained by price, while magnetic memories are slow; optical techniques may provide entries in the lower left of the graph.

Instruments' Silent 700 was the first terminal to use bubble memories—two of TI's TBM0103 92-kilobit devices—for nonvolatile storage of up to 50 pages of data. The Dallas firm's terminal incorporates a thermal printer yet weighs a scant 13 pounds and is no bigger than a portable typewriter. HP announced its 2635A, which contains the company's first medium-speed printer. The printing terminal uses HP's silicon-on-sapphire technology and prints 180 characters per second bidirectionally. TI also offered a similar intelligent printer this year, its model 810.

Printer progress

This past year saw noteworthy contributions in all phases of printers, from the high-end computer-output types to the very lowest, hobby-type devices. The former was addressed by nonimpact printers with speeds of about 20,000 lines per minute. The machines that moved fastest in this category were electrophotographic units, which rival typewriters for quality of output and sometimes can also generate graphics or logos. But there was less activity this year in ink-jet printers, either the 70,000-line-a-minute racehorses or the 90-character-per-second calligraphers.

The electrophotographic printers that bowed include Xerox Corp.'s 9700, which generates digitized forms and logos from a massive data base, Honeywell's page-printing system, which, like the IBM 3800, generates

forms and logos from negative plates, and the 3352 from Siemens AG. All use a laser-scanning arrangement.

At the low end of the printer class, electrosensitive printers bowed. The vague term refers to the black paper coated with a thin aluminum layer that is burned through by the discharge of current. SCI Systems Inc. of Huntsville, Ala., introduced a printer of this sort early this year that zips along at 2,000 characters per second yet costs only \$300 without interfacing electronics. Centronics Data Computer Corp. of Hudson, N. H., followed with a more conventional—though slower—version. Both produce satisfactory outputs, though dislike of the metallized paper has affected acceptance.

In the higher-end line-printing market, newer band types from Data 100, Dataproducts, Centronics, and others pushed speeds up to 900 lines per minute, with printing in several fonts. Moreover, the popularity of optical-character-reading wands and devices has spawned printers that generate OCR-readable characters, like the printer from Data 100.

Magnetic storage

At the low end of magnetic tapes, microcartridges received wider exposure as they appeared in HP's desktop computers and in TI equipment. Quantex Corp. introduced a palm-sized drive to accommodate this kind of cartridge, which can store several hundred megabytes of data. The not-altogether-forgotten cassette found a

COMPUTERS

home this year—as a substitute for paper tape in machine-tool control programs. Electronic Processors Inc., Englewood, Colo., has developed an encoding technique that allows even an audio-quality cassette drive to be used for exacting numerically controlled machine-tool programming.

New disks

Among disk technologies, the flexible or floppy disk, which is now well established, saw the development of double-sided, double-density recording in the model 850 drives from Shugart Associates Inc., Sunnyvale, Calif. With an unformatted capacity of 1.6 megabytes, the floppy rivals the low end of hard disks. Double-sided recording was blessed by IBM when it introduced its two-headed version of the floppy, but IBM has yet to support double-density recording, or M²FM.

Fast-access-time floppies came from Pertec Computer Corp., Wangco Inc., and others. Also worth noting is the 5¼-inch flexible-disk or minifloppy drive introduced by Shugart Associates late last year. Originally intended for text-editing applications, it has found a substantial market in personal computing.

In small hard-disk drives, the demands of minicomputer users spurred the doubling and tripling of storage capacities. Diablo Systems Inc., Electronic Memories and Magnetics Inc., and HP all introduced drives that combine fixed and removable media for an overall

storage of up to 75 megabytes. In all these devices, one disk could be removed; contained in a cartridge, it usually holds between 10 and 15 megabytes. Going against the tide, Japan's Fujitsu Ltd. introduced a 50-mbyte drive with a totally removable two-disk cartridge.

It is safe to say that the limits are being pressed in magnetic media, beyond which increased density becomes prohibitively expensive. The estimated ceiling of 1,000 tracks per inch is only a generation of devices away, and bit density limits of even 15,000 bits per inch are also not far off, being little more than double present high densities. By 1980, disk storage density will increase at most by a factor of 10, with most of the development going on in moving-head types of drives.

An optical future

Hence the appeal of optical storage technologies. Systems have been assembled that can provide archival storage of hundreds of billions of bits on small polyester sheets. In present techniques, which are by no means perfected, lasers burn microscopic holes in the film, and storage is therefore unalterable.

Clearly, optical techniques are the most likely to meet future storage needs, especially in the form of writeable optical disks. Factors such as noncontact reading and writing, high-speed (and multiple-track) scanning with inertialess beams, and tremendous bit densities presage the victory of optical over magnetic technologies.

PROFILE

Architect of the 11/60

"Keeper of the PDP architecture"—that is how Craig Mudge describes his first assignment at Digital Equipment Corp., Maynard, Mass., which he joined in 1973. The job was one for which his broad applications experience in Australia's computer industry had been an excellent preparation.

Almost immediately he became involved in the design of the PDP-11/70, but only peripherally. By far his greatest contribution was selling DEC on the idea of architectural consistency. "I had to convince them of the importance of compatibility throughout the PDP line and on down to the LSI-11," he recalls.

This laid the groundwork for the 11/60 minicomputer, which Mudge first proposed and then moved on to design with co-workers Jim O'Loughlin and Chuck Kaman.

The midrange 11/60 fills an important gap in the PDP family as the constant-price successor to the 11/40. Explains Mudge: "Every machine spawns two successors: one offers the same functionality at a lower price, while the other, like the 11/60, uses technology to give more performance at the same price." This is an important notion in minicomputer evolution, and it leads to two different types of design style.


An extremely zealous designer who recently served as a visiting faculty member at Carnegie-Mellon University ("to recharge my batteries"), Mudge is especially enthusiastic about using memories instead of logic in processors—what he terms "memory-intensive" design. "Since the cost reduction in memories is proceeding much faster than

in logic circuits," he maintains, "we're seeing memory-intensive design in all areas, from IBM 370s down."


These cost-effective designs are in evidence throughout the 11/60. Lookup tables in the fast floating-point processor, read-only-memory instruction decoding, and the widespread use of caches all point to memory-oriented design. Microcode—internal instructions stored in read-only memory—is becoming more attractive in cost-conscious design, Mudge adds.

In the 11/60, microcode emulates a second floating-point processor that triples throughput—a slower, integer floating-point processor that is used in compiling the 11/60's 46 instructions. Microcode is also used in the 11/60's writeable control store—DEC's first user-microprogrammable option. Altogether, the machine has three times as much microcode as the 11/40.

"The really interesting part of design is in making the hardware and software tradeoffs," says Mudge. "Today there are actually three elements—hardware, software, and also microcode—and each of them changes with each new and very different generation of technology. Keeping track of them is really the big challenge."

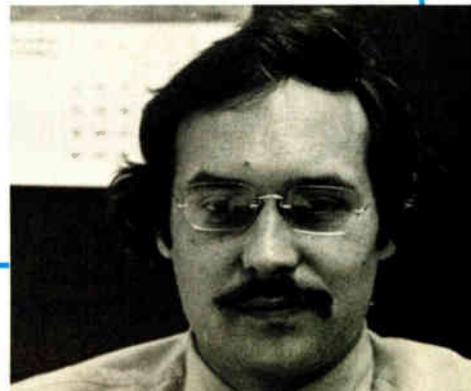

the solid state of the art in I/O systems

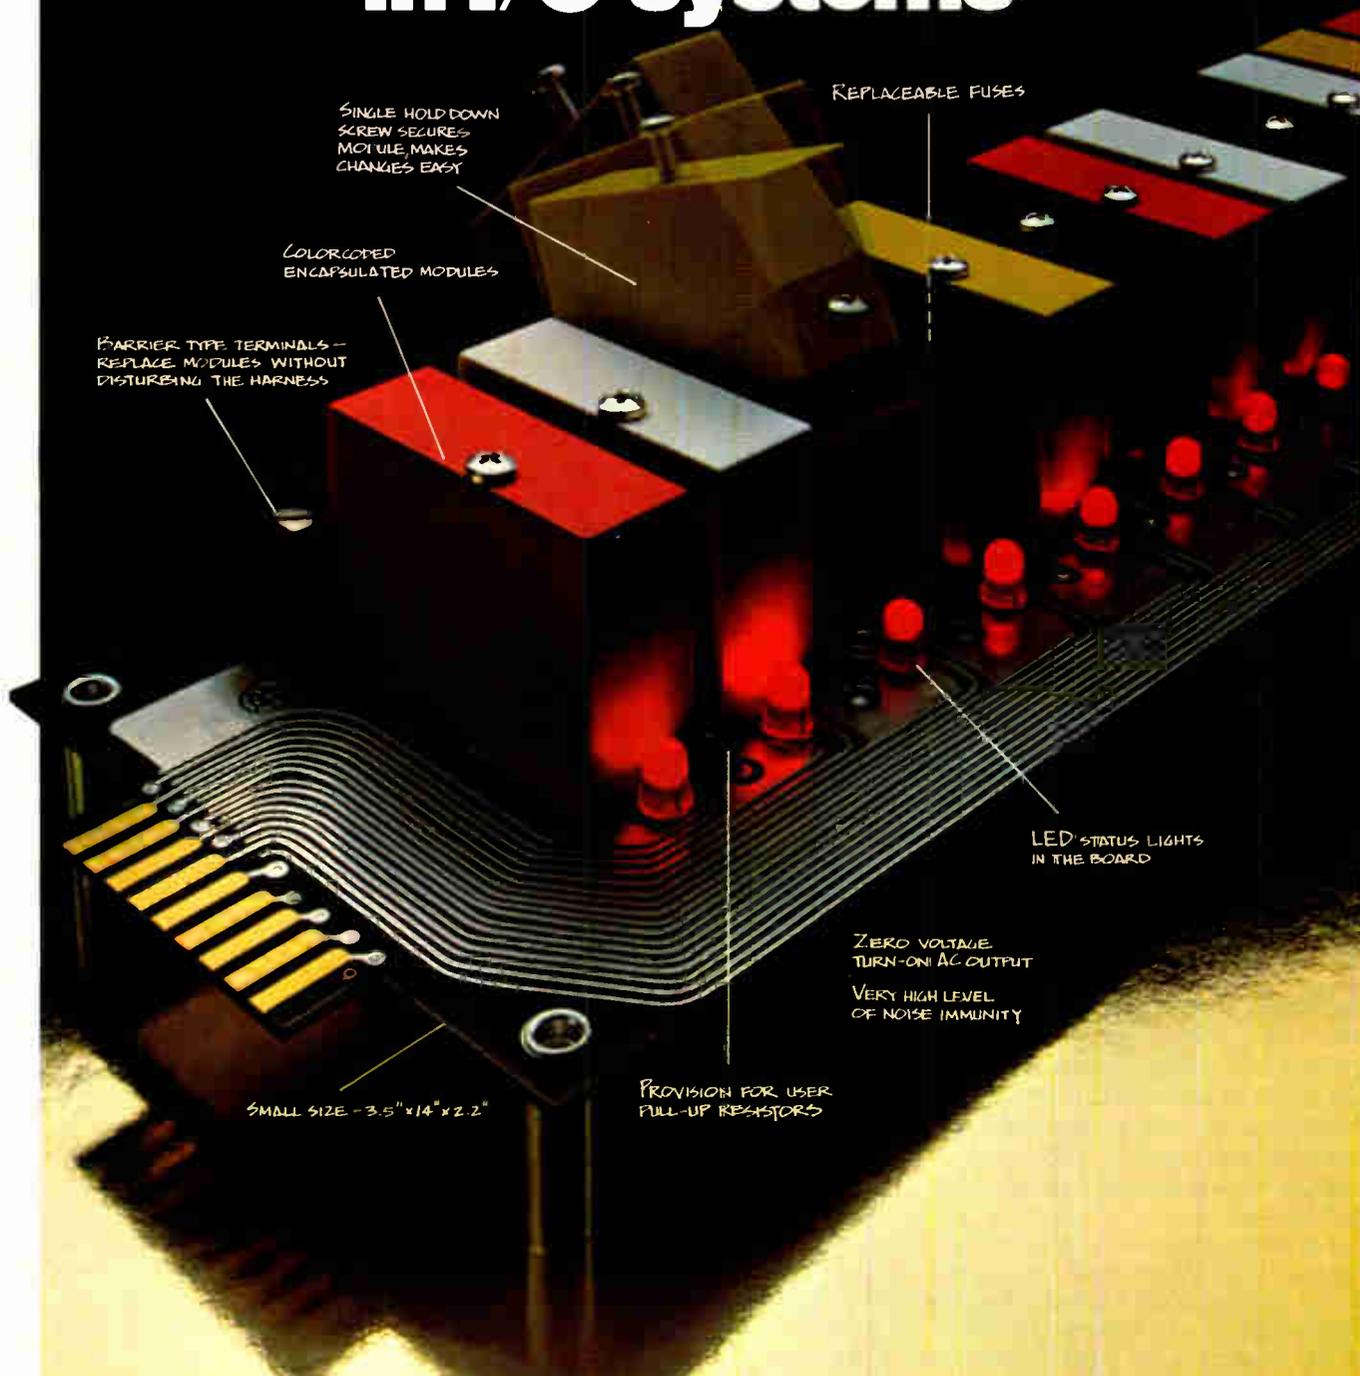

SINGLE HOLD DOWN
SCREW SECURES
MODULE, MAKES
CHANGES EASY

REPLACEABLE FUSES

COLOR-CODED
ENCAPSULATED MODULES

BARRIER TYPE TERMINALS —
REPLACE MODULES WITHOUT
DISTURBING THE HARNESS

LED STATUS LIGHTS
IN THE BOARD

ZERO VOLTAGE
TURN-ON AC OUTPUT
VERY HIGH LEVEL
OF NOISE IMMUNITY

SMALL SIZE — 3.5" x 14" x 2.2"

PROVISION FOR USER
PULL-UP RESISTORS

Here's the latest in I/O modules for industrial control—smaller, more practical, more reliable, and less expensive than ever before.

Smaller. The status board and 16 I/O modules measure a total of 3.5" wide, 2.2" high, and 14" long.

More practical. Simplified installation and maintenance—screw terminals, LED status lights, pull-up resistors, and replaceable fuses are all contained in the status board. Units can be unplugged or replaced without removing the wires.


More reliable. The finest in photo-isolated (1500 RMS) solid state relays, built with the high-quality components

Opto 22 uses in its famous top-quality line of power solid state relays. The modules are fully encapsulated in thermal conducting epoxy. Careful design and 100% testing at every step.

Less expensive. Because we concentrate solely on SSRs, you get Opto 22 quality and reliability at very competitive prices. Now you can specify the best and save money—with Opto 22 I/O solid state relays.

Opto 22

5842 Research Dr., Huntington Beach, California 92649 (714) 892-3313

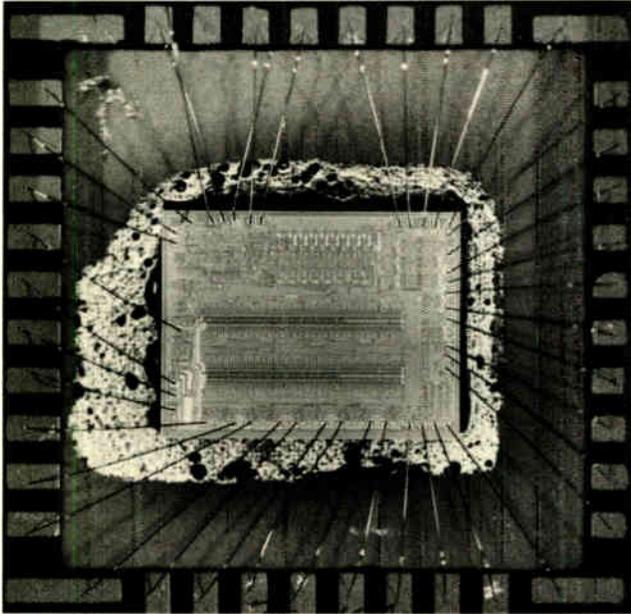

On the chip. The first monolithic data-acquisition system is National's 16-channel 8-bit chip, built with C-MOS technology. Compatible with most microcomputers, this a-d system succeeds in reducing analog-conversion cost fivefold.


conversion modules, although the latter are still the best way to go when high resolution, high accuracy, and fast throughput rates are needed. In fact, most of the analog I/O boards now emerging for use with microcomputer boards are being built with modules. But this situation should change as the board functions they provide are taken over by hybrids. The new hybrids are likely to include instrumentation amplifiers whose gain may be programmed with software, and even dc-dc converters for translating a 5-v logic supply up to the 15 v needed for many analog components.

Hybrid data-distribution systems are another possibility, as are the voltage-to-current converters needed for industrial applications in which current loops must be driven. The latter will probably offer full input-to-output isolation for protection from transients and noise.

Bi-FET op amps: priced to compete

In operational amplifiers, the bi-FET bandwagon is building up quite a head of steam. These devices, which combine junction field-effect transistors and bipolar transistors on the same chip, now seem to be emerging as the most cost-effective performers in the mixed-process area—with good reason. They can be made inexpensively, requiring only an extra processing step of ion implantation, and they offer good low-noise performance, broad bandwidth, and fast output slew rates.

Most important, though, this year the price of bi-FET op amps slid down to a level that permits them to compete with bipolar devices, like the ubiquitous 741, which have traditionally dominated the op-amp market. As a result of their toe-to-toe price scuffling, Texas Instruments Inc. and National Semiconductor Corp.

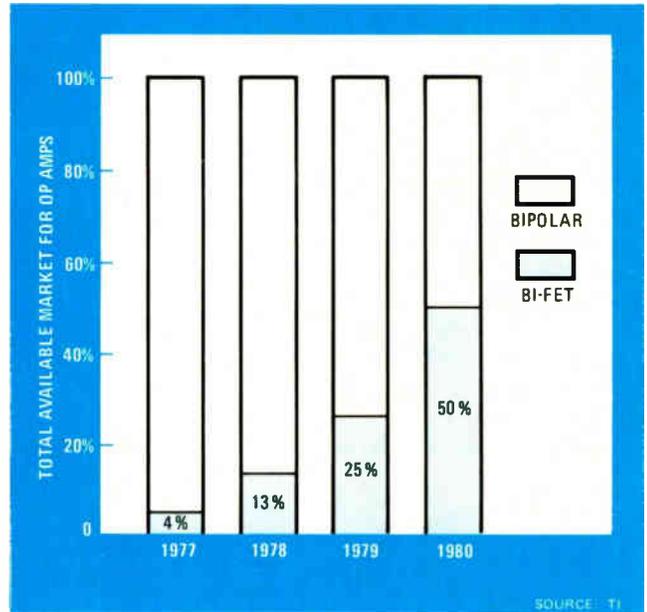

The bi-FET move. Mixed bipolar-field-effect-transistor processing is catching on with analog designers for high-quality front-end characteristics at reasonable costs. By 1980, bi-FET input stages will be used in 50% of all op amps built.

now have the cost of single general-purpose bi-FET op amps below 40 cents, with TI's least expensive device going for 33 cents and National's going for 39 cents. These prices compare very favorably with the 25-cent price tag of the industry-standard bipolar 741, considering the notable performance advantages of bi-FETs. What is more, as usage increases, prices for bi-FET op amps will probably drop even further, although not for the next few months at least.

These devices, however, do have two significant drawbacks—a fairly high initial input offset voltage and an input bias current that doubles every 10°C. But Precision Monolithics, using a current cancellation scheme and its zener-zap trimming, has come up with a line of precision bi-FET op amps that hold input offset voltage to only 0.5 millivolt and limit bias-current doubling to approximately every 18°C.

In the coming year, the market will also see more mixed-process linears, both bi-FET and bi-MOS. The former parts will most likely be data converters and sample-and-hold amplifiers; the latter—a combination of MOSFETs and bipolar transistors on the same chip—will most probably be analog multiplexers.

Pace quickens for power V-MOS

In the power area, V-groove MOS technology is now definitely shaking up the status quo. Since last year, a small semiconductor company, Siliconix Inc., has been touting the performance advantages of the power MOSFETs made with its power v-MOS process. Now, Siliconix is no longer alone in believing in the future of power MOSFETs: at least two major semiconductor houses plan to have such devices on the market within the next

Flukemeter II.



Like the classic "Flukemeter" differential voltmeter of the fifties (inset), the new 8020A DMM offers a superb combination of performance and value for the seventies. Only \$169.*

You know Fluke for innovation in precision test and measurement instrumentation. For almost 30 years we've anticipated the measurement problems that come with fast-changing technology.

And we've done it again. Introducing the new 8020A digital multimeter.

The 8020A is built to the same high standards we've designed into its predecessors. The only difference is that the 8020A is smaller. And, of course, it costs a lot less.

You'll find the 8020A is the only DMM around with such impressive features for only \$169,* now and for

some time to come. Features that mean value and versatility, like 26 ranges and seven functions, including conductance (which measures leakage to $10^{10}\Omega$). And three-way overload protection. Hi-lo power ohms. And more.

In fact, the 8020A is 13 ozs. of pocketable benchtop instrument performance, in the Fluke tradition. Performance you can count on for up to 200 hours of use with its inexpensive 9V battery, single custom CMOS LSI chip and low-power, razor-sharp 3½-digit LCD display.

Great performance, low cost: *That's* Fluke tradition. Where else can you

get a field reliable tool built to precision lab standards? Or, factory calibration that's NBS traceable, with 0.25% dc accuracy? And, of course, the Fluke 8020A has a full year warranty including all specifications, with worldwide service backup.

The quickest way to get one is to call (800) 426-0361, toll free. Give us your chargecard number and we'll ship one immediately. Or, a "Ten-Pack" for only \$1521.* And we'll tell you the location of the closest Fluke office or distributor for a hands-on demonstration.

*U.S. price only.

Command Performance: Demand Fluke.



1809-7016



Circle 115 on reader service card

The Ansley "D" Connector...



Our new series of male and female "D" connectors offer you a cost effective external mass termination cable and connector system second to none. Its uniqueness begins with a one-piece "D" connector package that meets industry standards for size, pin spacing, and contact reliability. With no loose parts to match up, positive cable-to-contact alignment is assured. Conductors are mass terminated in seconds with our standard BLUE MACSTM hand or bench tools. The results? Faster installation, higher reliability.

Contact pins are spaced on .0545" centers — a perfect fit for any standard inter-cabinet "D" type connector application. Our new "D" connectors are designed to mate with standard .050" pitch flat cable as well as our new, improved jacketed cable — the only flexible flat cable engineered specifically for out-of-cabinet use.

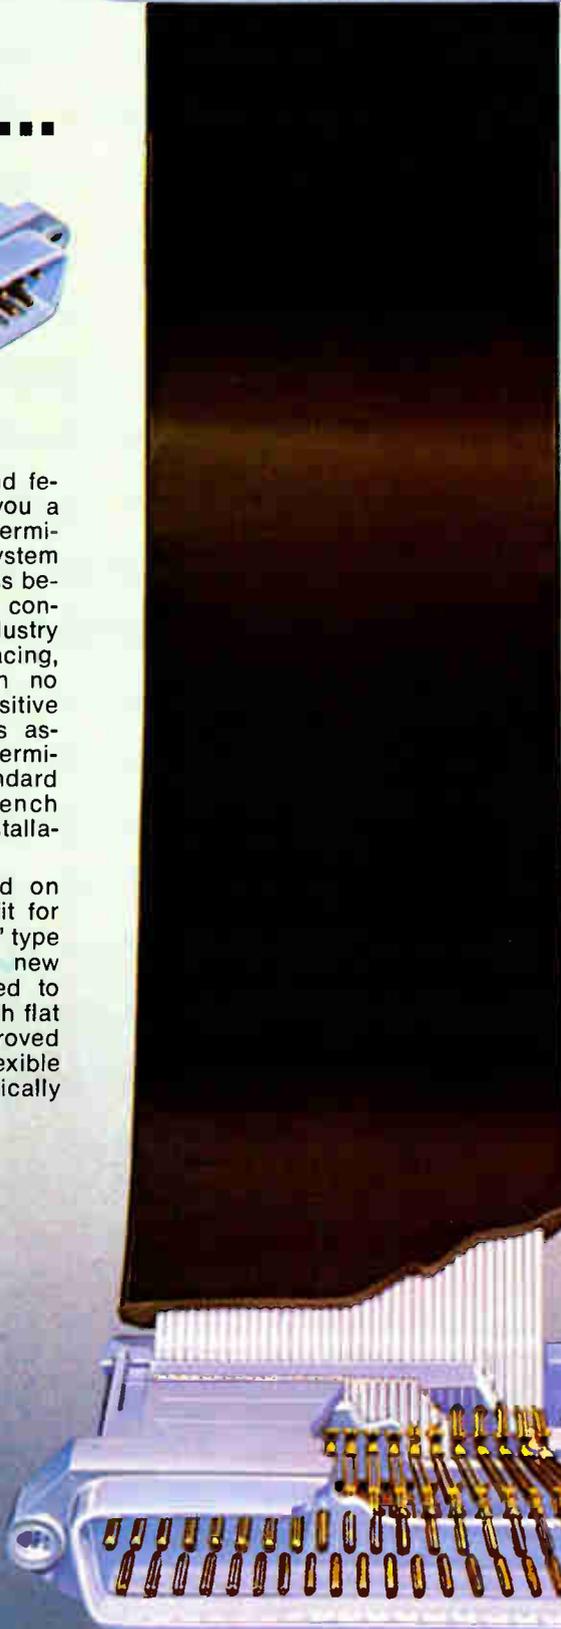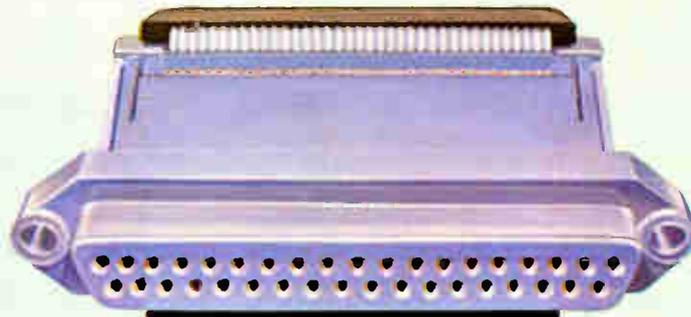

a new meaning to cost effectiveness.



The Ansley BLUE MACSTM jacketed cable is U.L. listed for external interconnection of electronic equipment. Electrically, it outperforms standard jacketed twisted pairs in typical I/O applications. And there's no special zipper lock tubing required — reducing the need for an extra cable accessory. Installation is faster, easier. And like all Ansley connectors, you can daisy chain our "D" types anywhere in the cable — along with our DIP socket, card edge, or pc board connectors.

Cable alignment and high contact reliability is assured — because both cable and connector are grooved for absolute alignment. Our patented TULIP™ 4-point insulation-displacing contacts are permanently fixed and sealed-in to provide a reliable, gas-tight, corrosion-free mass termination.

For the full reliability/cost effectiveness story and technical data, call or write:


T&B / Ansley

The mass termination company.

T&B/Ansley Corporation • Subsidiary
of Thomas & Betts Corporation
3208 Humboldt St. • Los Angeles, CA
90031 • Tel. (213) 223-2331 •
TWX 910-321-3938

Available through authorized
Ansley distributors

In Canada: T&B/Ansley, Ltd.
700 Thomas Ave.,
Industrial Park
Iberville, P.Q.

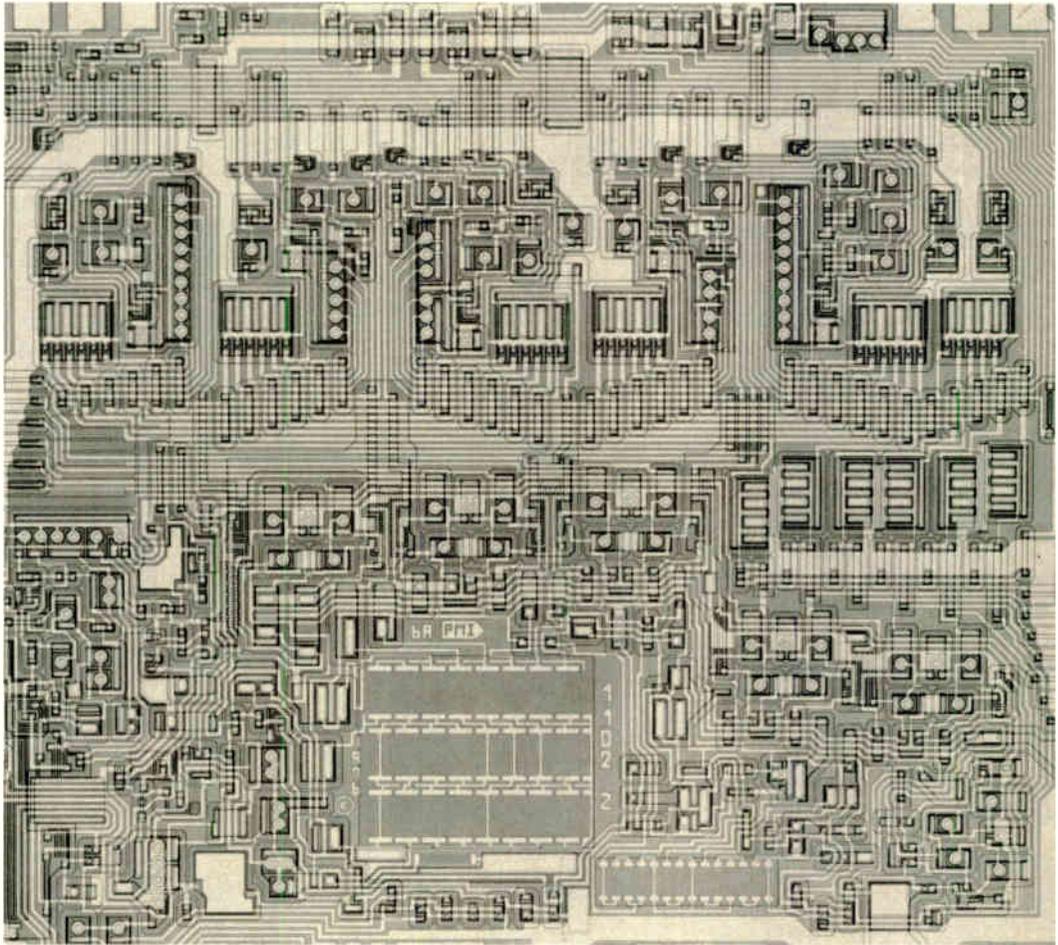

It's 12 bits good. This bit d-a converter from Precision Monolithics can do the job of hybrids costing much more. Although 8- and 10-bit converter chips have been available for some time, accurate one-chip converters capable of 12-bit resolution are just now becoming available.

few months. One of them, Fairchild Semiconductor, is busy designing several and also intends to second-source the low-frequency power MOSFETs made by Siliconix, as a small company named Supertex is already doing.

Also, Siliconix is stepping up its efforts to build high-frequency power MOSFETs for radio-frequency chores, where it appears that v-MOS really shines over bipolar technology. Appreciating this superiority, too, is Motorola Semiconductor Products, which has already made a 1-watt MOSFET for very-high-frequency applications and is planning to build higher-power devices that blanket all the rf bands. Other major bipolar power houses are now considering the viability of power FETs; their evaluations should be finished in the next three to six months.

Optical progress

Meanwhile, progress in other component areas also deserves noting. For instance, the performance of optical couplers has improved considerably. Also, these devices are now much easier to connect directly to logic circuitry. Some versions are fully temperature-compensated for transistor-transistor-logic applications, while others include up-front internal voltage regulators for easy line termination.

As for visible-light-emitting diodes, many now have internal current-limiting resistors; some even have

multiple junctions for use as multicolor indicators. Lenses for LEDs are improving as well, and better junction designs are resulting in brighter devices that sometimes even have a rectangular emitting area. Visible LEDs are also playing a bigger role in switching components. More dual in-line switches are including LED indicators for instant display of, say, a logic state; relays, too, are sporting them to show on/off conditions. And they are particularly evident in the newly emerging generation of solid-state interface modules intended for microprocessor-based control systems. (Built around a solid-state relay, these modules come in input and output versions for converting an ac or dc voltage to a logic-compatible signal and vice versa.)

Plastics are becoming more common in switches, potentiometers, and trimmers. To reduce costs, manufacturers are turning to these materials for fabricating shafts, bushings, and housings. In many cases, the plastic design eliminates sealing problems, since the shaft and housing may be molded to complement each other for a simple and extremely effective trouble-free seal.

In many component areas, even electromechanical relays, dual in-line or at least integrated-circuit-compatible configurations are becoming the rule. Makers of these relays are turning to fabrication techniques that lend themselves to volume production and easy automa-

COMPONENTS

tion. Simplified all-welded designs are driving costs down, while offering increased operating reliability and longer life than their predecessors.

For low-cost, high-volume production, many solid-state relays are being manufactured with thick-film techniques, using either packaged discrete components or unpackaged chips mounted on a substrate containing thick-film conductors and resistors.

Thick film and relays

For example, employing packaged discrete devices on a thick-film substrate, Hamlin Inc. has managed to squeeze a complete optically coupled solid-state relay into a single in-line package of less than 1 cubic inch. The relay is one of the recent inexpensive bare-bones units, so it lacks an output snubber network for protection against false firing caused by transients, although it does include zero-crossover input circuitry.

Thick film is even penetrating the fabrication of some electromechanical relays. Utilizing a thick-film timing module, Struthers-Dunn Inc. has cleverly converted standard electromechanical relays into time-delay units that occupy no more space than the regular relay alone. This simple design innovation also means lower costs, knocking down the price of time-delay relays by as much as half that of competitive units.

Resistors and capacitors have by no means been standing still, although the advances in this area are of a

much subtler nature. Improved inks for making thick-film resistor networks are giving rise to resistors that have a temperature stability of better than 50 parts per million and that can withstand laser trimming with no appreciable change in their characteristics. Furthermore, the coming generation of thick-film inks will require lower firing temperatures at shorter firing cycles, reducing manufacturing costs.

On the capacitor scene, the search continues for ways to upgrade the performance of aluminum electrolytics so that they may compete more directly with tantalum parts, which continue to get more expensive as the cost of tantalum goes up. In mid-1979 the ban goes into effect on polychlorinated biphenyls (PCBs), the impregnant used for oil-filled capacitors for over three decades, and this prospect has manufacturers searching for a suitable substitute. All known non-PCB materials are combustible and increase capacitor size.

Finally, quartz crystals, an often neglected component, are very much in the limelight these days because of the high-volume usage brought about by digital watches and microprocessors. To meet these new demands, crystals are undergoing significant changes, shrinking in size and yet providing increased ruggedness. In addition, improved automatic manufacturing techniques are lowering costs and yielding devices whose working frequency may be modified easily—for instance, through laser trimming.

PROFILE

Master of precision linears

George Erdi is one of today's rarities—a top-notch analog designer. Now a design engineering manager at Precision Monolithics Inc., Erdi is the man responsible for some of the most significant breakthroughs in linear integrated circuits, with a number of firsts to his credit.

At the Santa Clara, Calif., firm, he has designed the first precision bipolar operational amplifier to be compensated internally, the first precision bipolar field-effect-transistor op amps, and the first precision sample-and-hold amplifier to be made in monolithic form. Additionally, he was responsible for designing the company's voltage references and precision comparators, as well as for perfecting zener-zap trimming as a cost-effective technique for getting high performance out of a linear IC.

In fact, the comparators were the first linear ICs to contain compatible Schottky diodes, which Erdi used to speed up operation without degrading performance. Moreover, his design for the bi-FET op amps yielded notable improvements over existing devices—input offset voltage lowered to 0.5 millivolt, slew rate and bandwidth doubled, and input bias-current drift approximately halved.


Erdi joined PMI when it was founded back in 1969. Before that, right from school, he worked as a design engineer at Fairchild's Research and Development Laboratories in Palo Alto, Calif. During his three-year stay there, his efforts resulted in the 725, the first monolithic op amp to provide precision performance. At Fairchild, Erdi also was involved in the first attempt to build a digital-to-analog


converter on a single chip. In fact, it was this work that spurred the founding of PMI by a group from Fairchild who were interested in pursuing the potential of monolithic data converters.

Born in Hungary, Erdi left his native country after the unsuccessful 1956 revolution, emigrating to Canada. He received his bachelor's degree in electrical engineering from McGill University, then followed it with a master's in EE from the University of California at Berkeley.

For relaxation, Erdi swims and plays soccer. He also takes in concerts and plays as often as possible—on a recent five-day visit to New York, he happily attended the theater every night.

Erdi is extremely excited about the future of linear ICs, for the industry is just beginning to explore the numerous possibilities that mixed processing is opening up. The ability to utilize different, but compatible, processes on the same chip, he points out, will mean circuits that offer good digital and linear performance on the same piece of silicon, as is needed for data converters.

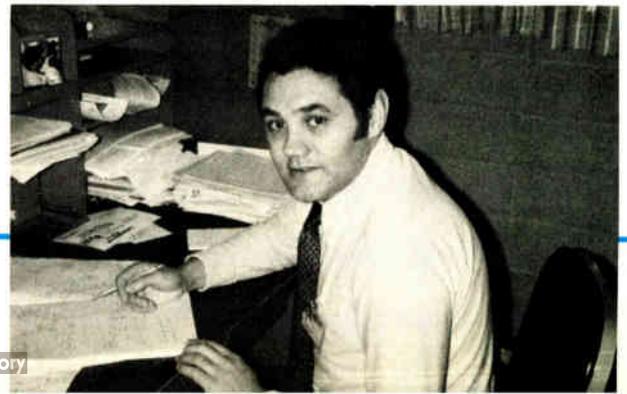

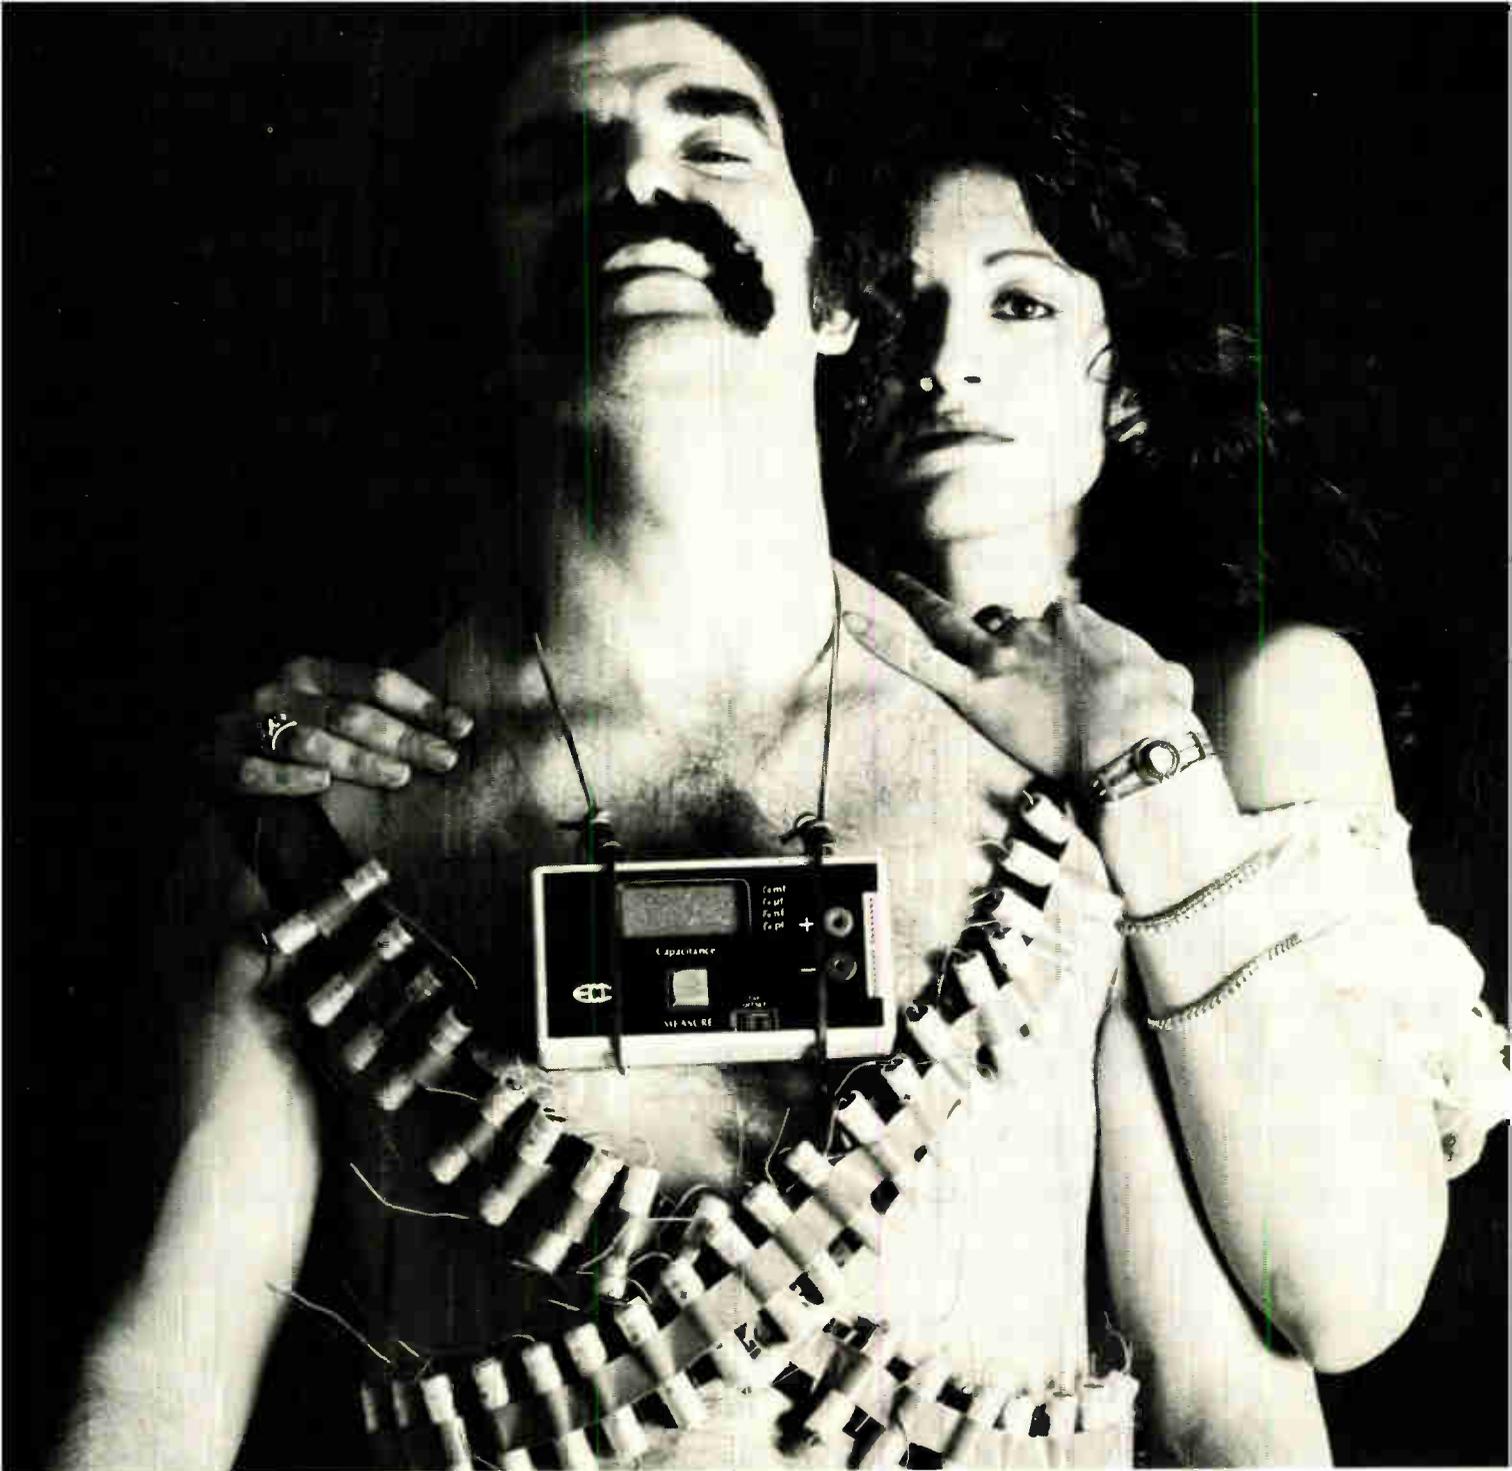

Mi chiquita, si...mi C-Meter, no.

Don't ask. This man isn't going to compromise. He knows that the pushbutton speed, high accuracy (0.1%), compact size and versatility (0.1 pf to 0.2 farads) make him faster on the draw than any reactionary still shaping up circuits by measuring resistors.

With the C-Meter®, you'll measure capacitors as standard operating procedure. You'll waste no time twiddling and nulling, and you'll cut the need for

costly tight-tolerance capacitors or tweak pots. You'll be as speedy as Gonzales... and popular too. People just can't keep their hands off the C-Meter. You owe it to yourself to try one. Our reps are friendly and stock them at **\$289.**

Capacitors supplied by Apollo Electronics, Inc.

ECD CORP.
196 Broadway, Cambridge
Mass. 02139 (617) 661-4400



SALES OFFICES: AL, Huntsville (205) 533-5896; AZ, Scottsdale (602) 947-7841; CA, Costa Mesa (714) 540-7160; CA, Sunnyvale (408) 733-8690; CO, Denver (303) 750-1222; FL, Winter Haven (813) 294-5815; GA, Chamblee (404) 457-7117; IL, Elk Grove V. II (312) 593-0282; IN, Indianapolis (317) 293-9827; MD, Silver Spring (301) 622-4200; MA, Wakefield (617) 245-5940; MN, Minneapolis (612) 781-1611; MO, Kansas City (816) 358-7272; So. NJ/Philadelphia (215) 674-9600; NM, Albuquerque (505) 299-7658; NY, Great Neck (516) 482-3500, (212) 895-7177; Syracuse (315) 446-0220; NC, Raleigh (919) 787-5818; OH, Centerville (513) 433-8171; TX, Houston (713) 685-9571; TX, Richardson (214) 231-2573.



Digital troubleshooting. The Data Test Corp. tester combines a digital multimeter with a digital counter-timer in one package for troubleshooting digital systems.

TECHNIQUES FOR SERVICING LSI-BASED GEAR EVOLVE

by Stephen E. Scrupski, *Instrumentation Editor*

□ The impact of microprocessors on instruments is proving to be more indirect than direct—but revolutionary all the same. Users of microprocessor-based equipment are urgently demanding test systems capable of servicing it, and already a few of the larger instrument companies have made significant moves toward filling this vacuum. Next year many others will also contribute to a bumper crop of service-oriented instruments, espousing many different approaches to fault diagnosis.

Generally, microprocessors have not pervaded test equipment itself to the extent that was predicted. Most instruments do not need complex controls or elaborate calculations, but must provide acceptable accuracies at ever more competitive prices. The growing ranks of low-cost, high-performance portable digital multimeters and counter-timers are evidence of this trend, and it is mainly the more complex high-speed counter-timers and spectrum analyzers that have found it profitable to exploit a microprocessor's capabilities.

The service problem


Designers of microprocessor-based equipment are coming under increasing pressure to take service techniques into account in their original designs. Although many different service techniques are emerging, prob-

ably all of them are effective in fault isolation if the designer translates his knowledge of a particular instrument's operation into troubleshooting methods tailored to servicing it. Possible approaches range from basic time-domain and voltage-measuring instruments, logic analyzers, and in-circuit emulators adapted for testing, right on up to a brand-new technique from Hewlett-Packard Co. called signature analysis.

Signature analysis is still too new for it to be possible to judge if its impact on test-instrument technology will be an enduring one. An adaptation of the error-detection and -correction techniques traditional in digital equipment, it uses annotated schematics much as in television servicing, where the technician compares readings at test points with the readings on a schematic and traces discrepancies back through the circuit until their origin is reached.

However, the equipment to be tested must originally be designed to include the features that allow signature analysis. When it introduced the technique in March, the firm noted that upwards of 40 new HP instruments were having signature analysis designed into them as their maintenance technique.

Another approach claiming a growing number of adherents is in-circuit emulation, which has proven very

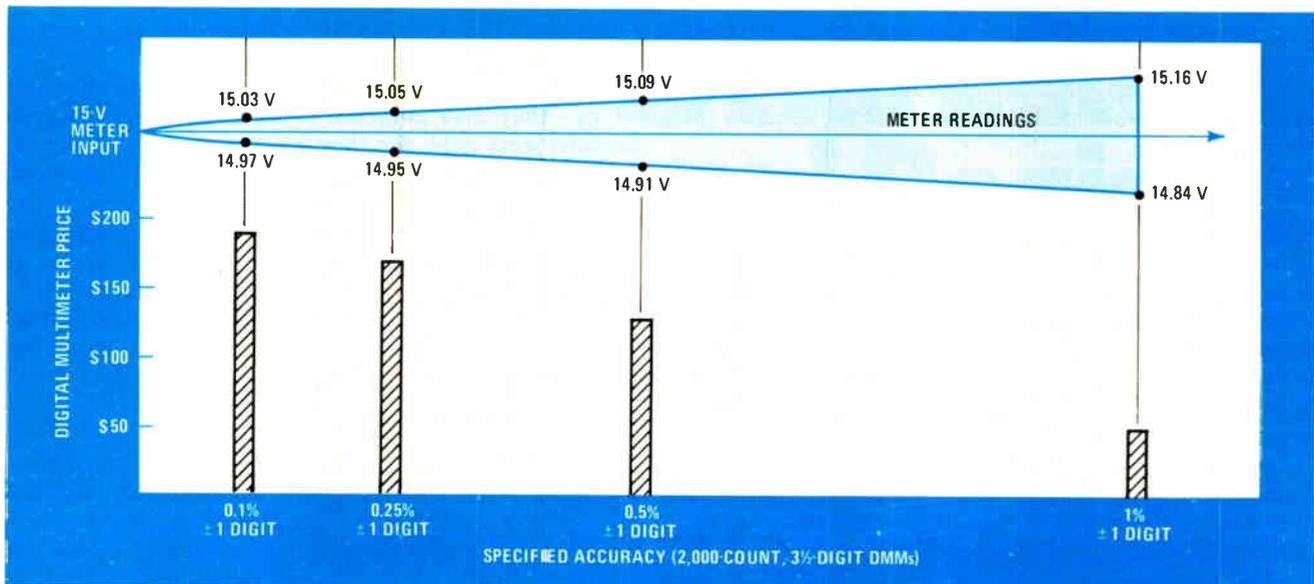

What price accuracy? For an input of 15 volts, various digital voltmeters may give different readings, depending on their specified accuracies. Height of the vertical bars represents typical prices for meters having the accuracies noted on the horizontal scale.

effective in debugging microprocessor-based prototype systems. Now it is being adapted for use with those systems once they move into the field. Intel Corp. of Santa Clara, Calif., the originator of in-circuit emulation, adapted it for servicing an instrument called the μ -Scope. By plugging the in-circuit emulation cable into the microprocessor socket in the system under test, the technician can apply the same troubleshooting techniques used in design to fault location in the field.

Now, with signature analysis and in-circuit emulation available as service techniques, what would the next step be? Combine the two—which Millenium Systems Inc., Cupertino, Calif., has done in its Microsystem Analyzer. In this unit, in-circuit emulation performs the overall functional tests, and then signature analysis takes over to track the faults down to the component level. Further, since the in-circuit emulator replaces the microprocessor, it can generate the digital patterns needed for signature analysis, which therefore need not be designed into the equipment originally.

A more conventional approach to digital servicing is being taken by Tektronix Inc. and Data Test Corp. Both supply Burroughs Corp. with a tester that combines multimeter functions (voltage, current, and resistance) with counter-timer functions (frequency, time interval, and transition counting) in a single package. Burroughs uses the instruments as service tools for its B80 series of computer systems, into which it designed features that make maximum use of the testers. However, the instruments would also be useful on other types of equipment.

Logic analyzers spread

Logic analyzers, up to this year high-priced units, are propagating downward into production testing and perhaps even into field service.

Hewlett-Packard Co.'s new \$1,800 model 1602A

logic-state analyzer turns into a servicing tool when controlled by a computing controller through the IEEE-488 interface bus. The 1602A stores 64 words of 16 bits each at clock speeds up to 10 megahertz. If a diagnostic procedure is written for a particular system, a troubleshooter can use a program tape to step the system through its operations, comparing the results on the light-emitting-diode display with the written procedure.

The 1602A is also evidence of two significant trends in logic analyzers—lower costs and easier-to-use functions. The \$1,800 unit is completely keyboard-controlled, and its single-line LED display can show logic states in any of four formats—hexadecimal, decimal, octal, or binary. The data probe pod includes a printed-circuit-type edge connector so that it could also be connected to specially designed printed-circuit boards for fault diagnosis.

Portability will naturally be important in the field as well as in the lab. The new model 920-D from Biomation Inc. of Cupertino, Calif., a 20-MHZ unit selling for \$1,295, is a portable 9.5 pounds. One unusual feature of the 920-D is the addition of an extra channel to pick up an extra bit. The unit, with basically an 8-bit-wide input, has a ninth channel to pick up, say, parity bits or to examine triggering relationships.

Up to now, logic analyzers have been either timing analyzers or logic-state analyzers. But next year should see a new generation of analyzers that will combine timing and state displays. With such equipment, the user will be able to do such tasks as capture certain timing waveforms based on triggers generated by logic states on the buses.

Until this year, the technology of portable meters has primarily been advanced through better custom large-scaled integrated circuits for analog-to-digital conversion. John Fluke Manufacturing Co.'s \$169 3½-digit model 8020A, for example, contains a custom chip

PROVEN PERFORMANCE CRYSTAL CLOCK OSCILLATORS



Motorola's K1100A leads the industry with a crystal clock oscillator that has a proven track record of more than two million units. That's right... over two million oscillators are in use by satisfied, repeat customers.

How versatile is the K1100A? With over 1200 frequencies already designed, and same-day shipment for standard stock frequencies of 4, 4.9152, 5, 10, and 20 MHz, you make the decision.

Oscillators are available from 250 kHz to 70 MHz, $\pm 0.01\%$ stability from 0°C to 70°C , TTL-compatible, and standard +5V dc input.

For full specifications and prices on the oscillator that design engineers trust, write Motorola, Component Products Department, 2553 N. Edginton, Franklin Park, Illinois 60131.

Or call (312) 451-1000, ext. 4183.



MOTOROLA
Communications and Electronics Inc.

examples of products in this class are spectrum analyzers from Tektronix and Hewlett-Packard.

The model 7L18 from the Beaverton, Ore., firm is a plug-in unit for the Tek 7000 series oscilloscope mainframes. It covers 1.5 gigahertz to 18 GHz with direct input and can resolve 30 hertz at input frequencies up to 12 GHz. A microprocessor automatically controls the settings of the resolution and sweeps to set up the optimum conditions. An MOS memory stores traces and allows display of two traces for comparison. The HP unit, model HP-8568A, is a lower-frequency unit, covering 100 Hz to 1.5 GHz, and uses three microprocessors to control functions, calculate results, and compute correction factors. Results are displayed on the CRT along with the trace, and it, too, has a semiconductor memory for storing control settings and displays.

Enhancing with microprocessors

Next year will see many more upper-end instruments incorporating microprocessors for control and computation functions. High-quality universal counter-timers, for example, can make good use of a microprocessor to calculate time-interval averages and set trigger levels, and next year will see new instruments of this type. Dana Laboratories, model 9000, now a couple of years old, set the style for this type of instrument and is still being enhanced with new features that can be handled by the microprocessor. Also, the need for higher speeds in elec-

tronic circuitry will challenge instrument designers to develop new methods of precision time measurements down in the picosecond range. Here, the problem requires not only a microprocessor to handle computations, but also a very stable oscillator.

Use of the IEEE-488 standard interface bus for interconnecting instruments in automated test setups grew steadily throughout 1977. There now are about 300 different instruments from about 90 different manufacturers with circuitry that makes them compatible with the bus. There was growing evidence, however, of problems with bus formats not covered by the standard, and moves were afoot to create a "third party" to help in the interchange of information among users of the bus. The National Bureau of Standards, Gaithersburg, Md., has expressed interest in becoming this third party and also in serving as a source of educational material on the bus. The NBS, in fact, has been using equipment connected via the bus to automate many of its own calibration services in Gaithersburg.

One of the major technical developments from the NBS this year was the development of a portable voltage standard based on the Josephson effect. Since 1972, the legal volt has been defined in terms of the Josephson junction, and the standard now in Gaithersburg has an accuracy of a few parts in 10^8 . The portable units, initially intended for circulation among various military laboratories, have an accuracy of about 1 part in 10^6 .

PROFILE

Designer of a best-selling meter

Hitting the best-seller list is no less an engineer's goal than an author's. One of the few engineers in this category is Paul Lucas, vice president of engineering at Data Precision Corp., Wakefield, Mass., whose \$295 model 245 portable 4½-digit multimeter has sold about 50,000 copies. By now it is the best-selling 4½-digit DMM of either the portable or the bench type.

Lucas, Bernard Gordon, Harold Goldberg, and Robert Scheinfein (respectively, Data Precision chairman, president, and sales vice president) met to define the product back in 1972. At the time, there was nothing as small (an easily hand-held 1¾ by 5½ by 3½ inches) and accurate (0.03% ± 1 digit basic dc accuracy) as the 245 was to be. "After we decided on the package, it was my job to fit everything in," he says, "and that was a nightmare." With dc-dc converters and high-voltage display multiplexing circuitry creating interference and little room for shielding,


early models read close to full scale just from the internal pickup. "It fought me every inch of the way," he says, but finally he reduced the crosstalk to an equivalent input level below 100 microvolts, the minimum resolution on the lowest range.

Once the meter went into production, in 1973, the sales curve took off. Lucas evinces little surprise at its success: "We expected to sell about 10,000 units a year, and we even did a little better than that." Why did it sell so well? "It met a need—there was simply nothing else on the market with its small size, low price, and accuracy."

Lucas, a math graduate from Boston University, has spent his entire engineering career in the Boston area, much of the time associated with Gordon, whom many consider the industry's leading expert on analog-to-digital conversion techniques. Lucas began with Epsco Inc. in 1958, where he met Gordon, then after stints at Adage Inc. and Brower Engineering rejoined Gordon at Gordon Engineering, which later spun off Data Precision.

As for the future of DMMs, Lucas notes the semiconductor makers' steady incursions with low-cost chip-display kits, from which a 3½-digit DMM can easily be assembled with the addition only of some extra signal-conditioning circuitry. Instrument manufacturers, however, have the expertise required, for example, to build accurate input circuitry for handling really low-level signals. So he expects that these companies will remain at the upper end of the meter range, where higher accuracies and higher precisions are necessary.



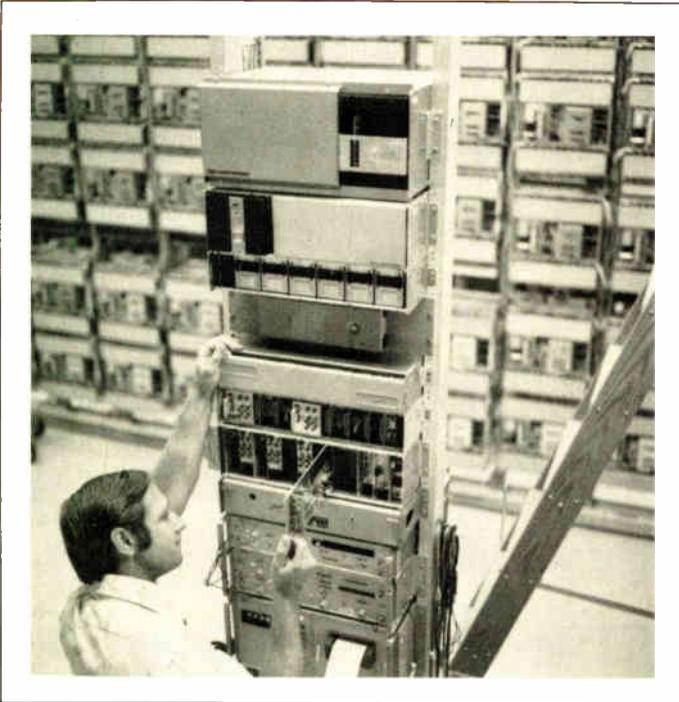

New look. For the first time, an optical-fiber terminal (foreground) found its way into the copper-wire preserves of a General Telephone Company of California toll office. An equipment installer is inserting a repeater board into the terminal.

FIBER OPTICS, LSI EXPAND SYSTEM CAPACITIES

by Richard Gundlach, *Communications Editor*

□ The outpourings of messages in the communications-oriented societies of today call for ever-stronger electronic measures to contain them, and so it's fiber optics and LSI to the rescue. To multiply the cable capacity of telephone systems, optical-fiber communications links are beginning to carry actual telephone traffic in the U.S., with similar setups being readied overseas. To meet the demands for greater channel capacity and better utilization of the radio spectrum, large-scale integration and microprocessor technology are being applied in all fields—even in citizens' band radios.

Also this year, high-capacity cellular mobile radio-telephone systems are moving toward field trials. The well-established microwave radio systems are benefiting from better traveling-wave tubes that make possible single-sideband techniques, which triple the capacity of existing networks. Moving just as rapidly is satellite technology, with plans advancing fast for higher-power, high-capacity satellites and for small, less costly antennas and earth stations.

Fiber-optic technology is moving into the rigorous environment of the telephone network. This year, American Telephone and Telegraph and General Telephone and Electronics installed systems that carry customers' messages and data. These short links are bringing the

wider bandwidth and hence greater channel capacity of glass fibers right into the home preserve of copper cable.

Abroad, experimental work is concentrating more on systems with performance that exceeds that of the standard telephone network. In Britain, the ITT subsidiary, Standard Telephone and Cables Ltd., successfully sent 140-megabit-per-second test traffic over a 9-kilometer link between two towns. In 1978, a similar installation in Tokyo, will carry voice and data along a 20-km route connecting four telephone exchanges of the Nippon Telegraph and Telephone Public Corp.

Other foreign efforts

Separate efforts by Philips Gloeilampenfabrieken in The Netherlands and the Centro Studie Laboratori Telecomunicazioni SPA of Turin, Italy, produced 140-mb/s data transmission over fiber-optic links. Perhaps the highest data rate to come out of the lab is reported by NTT's Musashino Electrical Communication Laboratory. Its optic system transmits 800-mb/s signals on a 7-km length of single-mode cables. Error rate is less than 10^{-9} .

Fiber optics is still an expensive technology, but dwindling costs are augured by several advances in both the fiber processing and the laser diodes that send the light signals. These developments include cost-effective

LSI IN TELECOMMUNICATIONS				
LSI circuits	Application			
	Telephone	Private branch exchanges	Central office	Carrier
Pulse dialers				
Repertory dialers				
Tone dialers				
Tone decoders				
Tone receivers				
Repeaters				
Codes (delta and pulse-code modulation)				
Frequency synthesizers				
Analog companders				
Modulator / demodulators				
Multiplexers				
Filters				
Microprocessors				
Memories				

performance hikes, as well as direct cost-cutting.

The price of the glass-fiber replacements for copper cable is crucial. Manufacturers put today's bare fiber costs at about \$1 per meter, but they think volume production will drop that to about 10 cents a meter. However, Theodore A. Litovitz and Pedro B. Macedo of the Catholic University of America in Washington, D. C., have announced a process based on bulk chemical treatment rather than vapor deposition. They claim it is now capable of producing bare fibers for 10 cents a meter, and process refinement will drop the cost to a penny a meter.

Such a price break would strengthen fiber optics' bid for the telephone, cable-television, and data-link markets. But the production of these fibers outside the laboratory is still a question mark. The answer will be forthcoming: Canada Wire and Cable Ltd. and Britain's Pilkington Bros. Ltd. are licensing the technology.

As important as reducing fiber costs are the performance improvements that point the way to longer-lived, more powerful gallium-aluminum-arsenide lasers. This year Bell Laboratories reported achieving a significant goal: solid-state lasers with average projected lifetimes of 1 million hours, based on accelerated aging tests.

Another important goal is more powerful laser diodes that oscillate in a stable fundamental mode. Researchers at IBM's research center in Yorktown Heights, N. Y., are reporting development of a diode that produces an essentially round spot of light only 2 micrometers in diameter and has an optical power of 85 milliwatts, about three times that previously reported for stable round-spot devices. The small spot of the IBM diode means it can easily couple its optical power to small fibers at efficiencies higher than 70%. Moreover, it can handle data rates in excess of 100 mb/s.

Promising work is also under way with tunable diodes, which will be an efficient way of producing the multiple channels necessary for frequency multiplexing. One

route is the optical-feedback scheme being developed by Xerox's Palo Alto Research Center in California. By optically pumping various portions of a split-waveguide laser, it has tuned them over a 3-nanometer band.

Along the same lines, Cornell University researchers have demonstrated an electronically adjustable diode that has a laser line width of less than 0.05 nm. Over a 5-nm tuning range, then, there would be 100 channels that could be multiplexed. The electro-optic tuner Cornell is using can switch in 5 nanoseconds: sweeping across 100 channels at this rate gives a multiplexing bandwidth of 200 gigahertz.

Another IBM development is a novel package that makes laser arrays practical. Such an array can provide many separate data channels for communications. In display or printing applications, it can provide an entire page of information at once [*Electronics*, Sept. 15, p. 40]. The key to practicality is providing precise alignment without expensive machining by the use of the same preferential-etching technology employed in making V-groove metal-oxide-semiconductor transistors.

LSI answers the call


Microprocessors and other LSI circuits are providing more and more solutions to tough problems in all phases of communications technology, from mobile telephones and citizens' band radios to satellites and digital exchanges [*Electronics*, April 28, p. 93]. Continuing is the push to develop low-cost LSI coder/decoders—potentially, the most widely used device in digital communications. With digital techniques becoming more commonplace, dozens of companies are developing both pulse-code-modulation and delta-modulation codecs and the related charge-coupled-device filters.

Ahead in the race are Bell Northern Research of Canada and Intel, which are putting finishing touches on PCM codec chips that include CCD filters. Precision Monolithics Inc., which introduced the companding digital-to-analog converter chip in 1975, is offering LSI parts that combine with the converter to make an eight-channel multiplexing PCM codec.

A hybrid PCM codec developed by Stromberg-Carlson Corp. of Rochester, N. Y., is used in the computer-controlled digital telephone switch for small central offices, first installed this year. Combining five integrated-circuit chips in a package about the size of a 22-pin dual in-line package, the codec meets the stringent performance requirements of the small offices, which demand a codec cheap enough to dedicate one to each telephone line. LSI technology made this possible.

Another tack is under investigation by the British Post Office, which is looking into a combination of delta modulation and PCM to provide a codec cheap enough to be used on individual telephone lines. Nor are codecs limited to telephone networks. Satellite Business Systems plans to use 32-bit delta-modulation units on the analog voice ports in all its earth-station equipment.

Of course, codecs will not be the only LSI circuits in communications equipment. The table lists applications

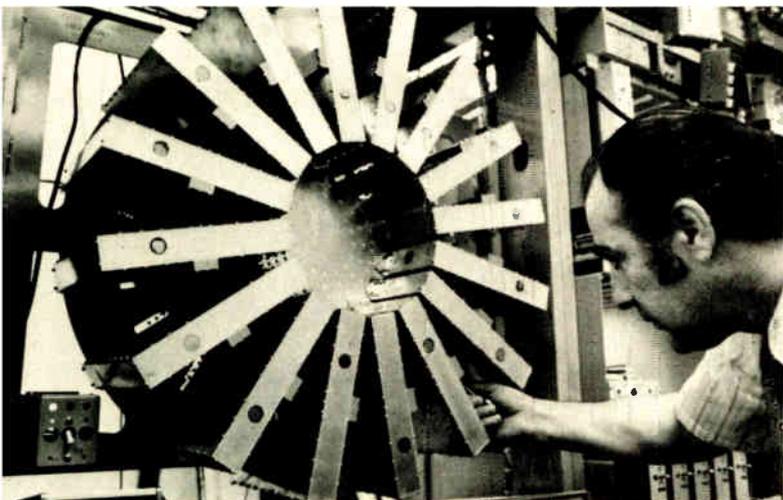

for specially designed chips in communications.

Large-scale integration also is being used in chips under development to encrypt data for secure transmission. The National Bureau of Standards has set a Government data-encryption standard that should give impetus to this development. However, it may be two years before a full range of chips is widely available.

Fairchild Camera and Instrument Corp. of Mountain View, Calif., has developed a high-speed bit-slice multi-chip encryption approach that will find use in many communications applications besides data terminals [*Electronics*, Sept. 1, p. 32]. Its devices should be available later this year at \$30 a set—dropping to about \$10 as production volume increases. Motorola and Rockwell also are moving rapidly towards marketing such devices.

More mobile-telephone channels

Today's mobile radiotelephone is a highly popular piece of equipment—so much in demand that there are too few radio channels to serve those who want to subscribe. Many subscribers also find that mobility is a loaded question, since the phones generally cannot be removed from the automobile.

To overcome the limitation on the number of channels, AT&T and Motorola are betting on the cellular approach. Such a system will achieve more efficient use of the spectrum by reusing frequencies and controlling transmission power. Each radiotelephone base station serves subscribers within the geographic area (cell) that its signal reaches. Within a cluster of contiguous cells, each is allocated a set of frequencies. Neighboring cells are assigned a different set of frequencies to avoid interference. However, cells far enough apart may simultaneously use the same set of frequencies.

By reducing the transmitted power along with the size of the cell, the same frequency can be reused more often within a given area, thus serving many more users. If more subscribers than channels exist, the cell size can be made smaller to allow several clusters to occupy an area previously taken up by a single cluster.

The user is assigned to one channel, but as he or she

Getting it all together. A Bell Telephone Laboratories' engineer checks the combiner-bay assembly, part of Bell's high-capacity mobile-telephone cellular equipment that combines the output of each of 16-channel power amplifiers into a single transmission line.

travels from one cell to another, the transmissions are handed off from base station to base station by a switching office. The base stations and the switching office will have sophisticated equipment that can juggle the transmissions among the available frequencies in each cell without any interruption of service as far as the subscriber is concerned. To make this cellular approach work will require extensive use of LSI and microcomputer technology for components and control systems to improve performance, minimize interference, and store and display information.

Both Motorola and Bell are putting together trial cellular systems, under the watchful eye of the Federal Communications Commission. Also, Motorola is developing a radiotelephone small enough to fit into a shirt pocket or purse and is designing its cellular system to accommodate these portables.

A new breed of CBs

Citizens' band transceivers also are benefiting from LSI technology. This year, digital frequency-synthesizer ICs made the manufacturers' changeover from 23-channel sets to 40-channel units both easy and inexpensive. At least a dozen semiconductor manufacturers are competing for a place in the 40-channel models by offering monolithic synthesizers in both the bipolar and complementary-MOS technologies. One of the more advanced C-MOS designs is from RCA [*Electronics*, April 28, p. 77]. It even includes an on-chip voltage-controlled oscillator and requires only an external reference crystal, an RC network, and tuned LC circuit.

Such synthesizers are just the harbinger of the move to make CB into a kind of universal mobile phone. Besides providing circuits for better transmission and reception, advanced semiconductor technology is being tapped to provide easy-to-use single-sideband radios and to send coded selective-call signals, which enable a user to receive only those transmissions he elects.

Reflecting this change in direction is Texas Instruments' combination of single-sideband CB transceiver and a-m radio. The Dallas firm's models will be the first CB units to use microprocessor technology [*Electronics*, May 12, p. 31]. The circuitry uses two 4-bit TMS1100 microcomputers—one scanning the push buttons in the handset and the other automating functions in the transceiver such as eliminating the need to continuously tune a clarifier to make SSB transmissions intelligible.

Microwave radio, the workhorse of long-distance transmission of voice, data, and television traffic, is getting a technical refurbishing. The immediate problem is more traffic than existing systems can handle, so work is concentrating on cost-effectively increasing channel capacity and using computer-assisted adaptive sharing of existing and future facilities.

How fast can you measure rise time, fall time and pulse width?



Your way.

(About 5 minutes.)

1. Connect signal to scope.
2. Adjust trace intensity.
3. Adjust focus. 4. Select VOLTS/DIV range.
5. Select TIME/DIV range. 6. Adjust vertical gain to fill screen for location of 10% & 90% points. 7. Locate 10% point. 8. Locate 90% point. 9. Determine horizontal displacement between 10% & 90% points. 10. Multiply displacement by horizontal scale factor.

That's RISE TIME. Only 9 more steps and you've got PULSE WIDTH and FALL TIME.

Our way.

(About 5 seconds.)

1. Connect signal.
2. Push button for RISE TIME. 3. Push button for PULSE WIDTH. 4. Push button for FALL TIME.

The rest is automatic.

Your move.

Give us a call and we'll tell you how the Dana 9000 Microprocessing Timer/Counter can solve your measurement problem the easy way.

DANA®

Others measure by us.

Dana Laboratories, Inc., 2401 Campus Drive, Irvine, CA 92715
Phone: 714/833-1234

Circle 129 for Product Demonstration
Circle 264 for Literature Only

World Radio History



It balances performance and cost where nylons and thermosets can't.

VALOX® thermoplastic polyester resins. From a performance/cost standpoint, VALOX resins consistently outperform nylons and thermosets.

They offer stable electrical properties even at higher temperatures and in moist environments.

VALOX resins have UL recognition of 140°C and heat deflection temperatures up to 420°F. Flame retardant grades are rated 94V-0 at 0.030 in.*

They exhibit excellent resistance to the broad range of solvents and chemicals typically encountered in electrical/electronic applications.

VALOX resins also offer outstanding moldability.

And Cost? VALOX resins cost less than nylons, and parts molded in VALOX resin can be more economical than thermoset parts through unique thin-wall design, scrapfree molding and short cycle times.

For more information on the performance/cost balance that VALOX resins offer, write for our new brochure: Section 300-04, General Electric Company, VALOX Products Section, One Plastics Avenue, Pittsfield, MA 01201.

*This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.


WHAT THE WORLD IS COMING TO: GE PLASTICS


VALOX® LEXAN® NORYL® GENAL®

GENERAL  ELECTRIC

Circle 130 on reader service card

World Radio History



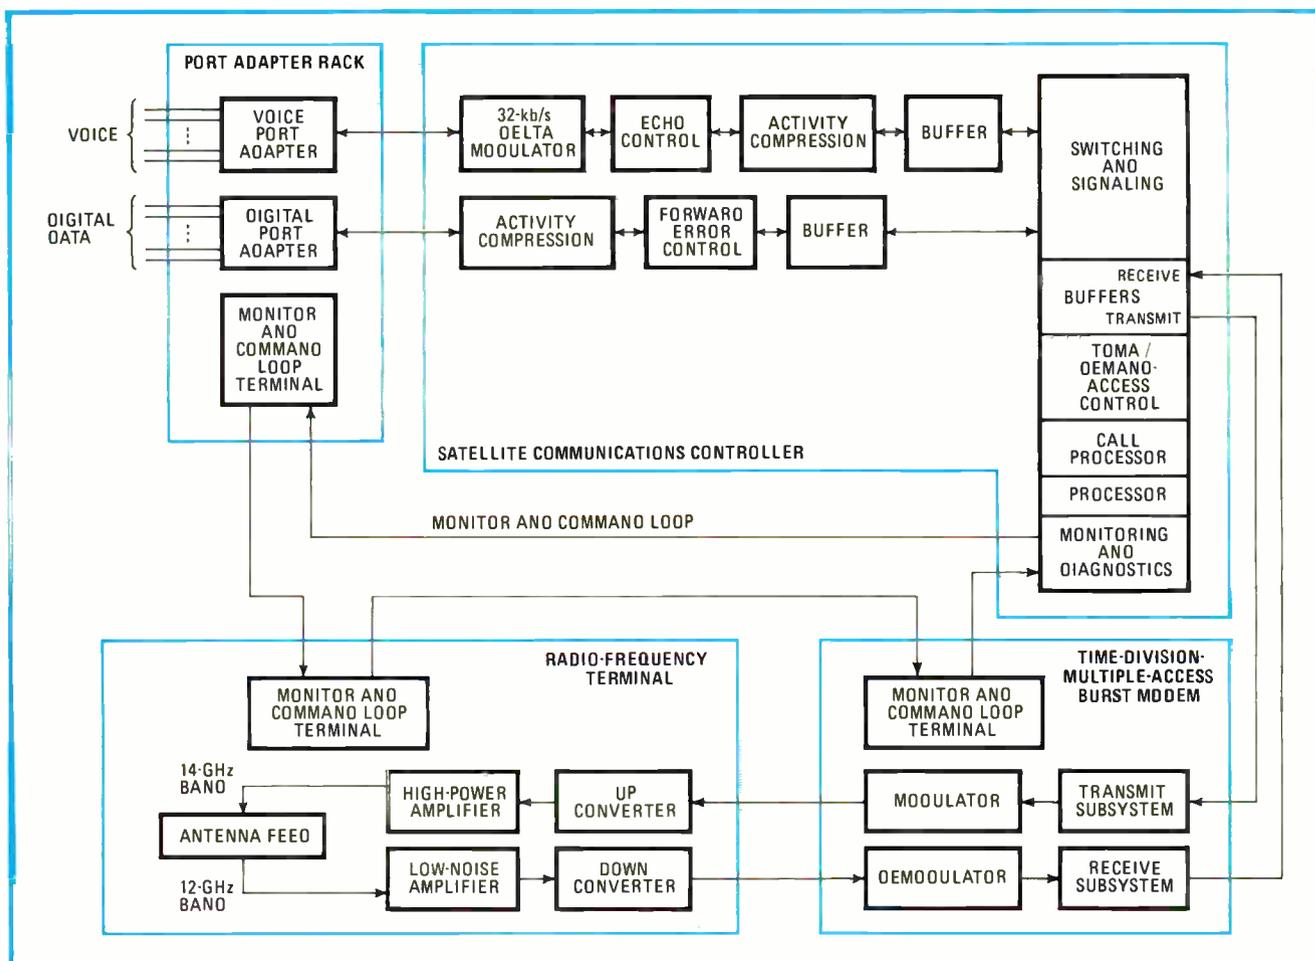

All digital. Key ingredients of SBS earth stations are the satellite communications controller that performs multiple-access, switching, and control functions and the burst modem that enables bursts of digital data to be transmitted to each satellite channel on a time-shared basis.

For example, Bell is using SSB techniques to triple the capacity of its microwave relay equipment, which handles about 70% of U.S. interstate calls. The main stumbling block was system nonlinearities, which restrict overall channel capacity. To reduce these nonlinearities, Bell is using an improved traveling-wave-tube amplifier in its transmitters, while predistorting the signals to cancel any distortions generated by the TWT.

Other advances coming

Future microwave systems will benefit from other technological advances: terminal multiplexing equipment that will more efficiently combine the 6,000 voice circuits per channel that SSB makes possible, a special microwave preamplifier to handle a-m, SSB, and conventional fm channels in a single transmitting unit, and space-diversity antennas to counter fading. The move towards digital transmission will benefit from developments in digital-switching and multiplexing technology, as well as improvements in solid-state components.

The growth of satellite communications is just getting started, but its role as an important means of transmitting voice, data, and TV signals is already assured. To

help the space systems cope with increasing volumes of traffic, several technical advances are going into the generation of satellites that will go into orbit within the next three years.

The trend clearly is towards putting more power and circuit capacity into the satellites at higher frequencies. Such frequencies reduce interference from terrestrial communications while allowing lower-cost earth stations with smaller antennas and greater bandwidth. The increased capacity comes from frequency-reuse techniques with dual polarization of antennas in transmit and receive and beam-steering schemes that permit continuous real-time reassignment of channel capacity to accommodate the varying needs of users.

New technology for satellites

For example, the Intelsat V satellite will carry K_u -band spot-beam antennas that will use dual-polarization, multiple, shaped beams. Its complex transponder with 27 channels switchable between various antenna coverages will use 43 TWT amplifiers (almost twice as many as in preceding satellites), 15 solid-state receivers using microwave IC technology, and novel contiguous-

COMMUNICATIONS

band output filters that reduce the number of such devices necessary for the same level of selectivity.

Satellite Business Systems is readying the first all-digital satellite network for U.S. coverage. As well as lowering the cost of sending data, this new communications network features small low-cost antennas and cheaper earth-station equipment to be installed at the subscribers' business locations. The all-digital, fully switched, private network will utilize the advanced technique of time-division multiple access with demand assignment, thereby providing each customer with its own communications net. The networks can be tailored to meet each customer's requirements, and each will be able to allocate its satellite capability dynamically among the earth stations in its network in order to meet real-time traffic requirements.

Already in orbit is the experimental Canadian satellite, Hermes (formerly called the CTS), and it is proving out the concept of higher frequencies and smaller receiving antennas. Japan is readying its experimental broadcast and communications satellite that will help develop the technologies for its planned domestic satellite system.

The new satellites will operate in the 12- and 14-GHz bands, thus providing relief from interference on the

heavily used 4- and 6-GHz bands shared by terrestrial links and present satellites. Moreover, technology for 18- and 30-GHz operation is coming on fast.

However, these 12-GHz-and-up bands present some problems. One problem to be solved is that orthogonal antenna polarization, which allows frequency reuse, may not work well with the 12-GHz-and-up bands. Moreover, satellite transmitters must be more powerful to get a good signal-to-noise ratio in conjunction with the use of the smaller earth-station antennas. For instance, heavy rain may cause signal fading or even outages.

High-power amplifiers are being developed for both satellite and ground-station use at these higher frequencies. For example, Litton made a 200-watt TWT for Hermes; Hughes' 100-w TWT will be used in the Japanese satellite; and both Telefunken and Siemens in West Germany have developed 500-w TWTs.

Under investigation are electronic beam-steering and beam-shaping techniques that will put more power into selected satellite signal transmissions. Beam steering concentrates the signal on a specific area, while beam shaping focuses the signal so that it does not overlap into other areas. General Electric's Space division in Philadelphia and NASA's Goddard Space Flight Center are investigating the technology required for such systems.

PROFILE

The team that made fiber-optic links a reality

Achieving a practical fiber-optic system that could withstand the rigors of a telephone operating environment and of installation by someone besides highly skilled lab personnel is no small task. But Bell Telephone Laboratories researchers did just that last year when they demonstrated a link working in a simulated operating telephone environment in Atlanta, Georgia. The fiber-optic system not only worked well with existing telephone equipment, but the cable was pulled through telephone ducts and mass-spliced without any handling of individual fibers.

Although many individuals contributed to that breakthrough, which paved the way for a similar real-world installation in Chicago this year, three Bell Labs engineers played major roles in making the first practical fiber-optic telecommunications link a reality.


Joe Mullins (center) guided the electronics and systems design. The only physicist in the trio, he never had any doubts about the electronics needed for the link. But he remembers saying skeptically, "The day I have a demountable fiber-optic connector, I'll believe it."

Of course, that day did come, but not without many moments of anxiety, according to Jack Cook (left), who was responsible for the interconnections and system characterization. "The problem of molding the single-fiber connectors for the telephone distribution frames with sufficient accuracy to assure low-loss connections was solved almost at the last minute," he says. "Western Electric's Engineering Research Center took standard stock brass tubing

and formed it into a double cone that precisely centered the fibers."

Mort Schwartz, who was responsible for the cables, the cable connectors, and installation, saw the biggest problem as taking existing technology and simplifying it so that workers with no special skills could handle the fiber-optic links as easily as twisted pairs of wire. "Right now we can do splicing more quickly and simply with optical fibers than we can with standard twisted-wire cables," he says. "And we are making splice cases not much bigger than the fiber-optic cable dimensions."

All three are involved in Bell's ongoing fiber-optic program and are anxious to see how everything holds up under long-term exposure to harsh environments. They agree that optical fibers will not replace metallic conductors until devices, connectors, and fibers all come down in price. But they are convinced such drops will happen fairly soon. Also, they feel what is needed are longer-wavelength sources in the 1,200-nanometer region where fiber losses are less and there is less of a problem with material dispersion, which limits the system range and bandwidth, especially when light-emitting diodes are used.

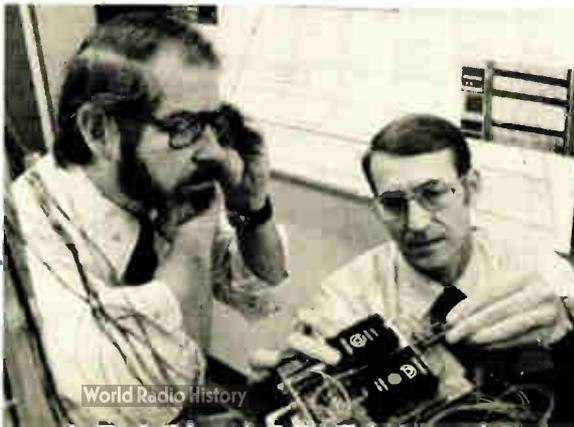

If you have one of these...



...you can start automatic testing with one of these.



Now you can get into automatic testing equipment (ATE) for well under \$10,000, total cost.

All you need is one of the units pictured, the new SPG-800 Synthesized Programmable Generator, and a little do-it-yourself effort. Just use one of the units pictured to store your test procedure program with simple instructions to command the SPG-800 (and any other programmable instruments you use) and you're off and running.

No more knob spinning. No more hooking up counters and scopes and voltmeters to your signal source. Now automatic testing is within reach of every manufacturer—along with the savings in time and labor it means.

And the Model SPG-800 is a modular instrument. So you can get started with just the basic unit for only \$3195. It is a combination programmable function generator operating in the 0.1Hz to 13MHz range and a programmable DC voltage source.

Now or later, add Interstate's low cost field-installable plug-in cards and you'll have a programmable synthesizer and pulse generator too—four programmable test instruments in one.

Interfacing the SPG-800 is easy, too. Use its basic ASCII interface or one of its (optional) plug-in cards for the IEEE bus, the RS-232C or 20 mil loop or parallel interface.

No matter what configuration you order, you'll find the SPG-800 easy to program and reliable in use. And the optional operator control panel—in English—is easily learned by non-technical personnel, so you can program it directly, the day you get it.

If you didn't think your company could afford ATE, it's time to re-think... write today for more information Or call us at (714) 772-2811 or (800) 854-3825 toll free.

The new SPG-800.

Please send me full information


Name _____ Title _____
 Company _____
 Address _____
 City _____ State _____ Zip _____
 Telephone Number _____

Interstate Electronics Corp.
 Department 7000
 P.O. Box 3117, Anaheim, CA 92803

**INTERSTATE
 ELECTRONICS
 CORPORATION**

SUBSIDIARY OF **ATO**

Circle 133 on reader service card

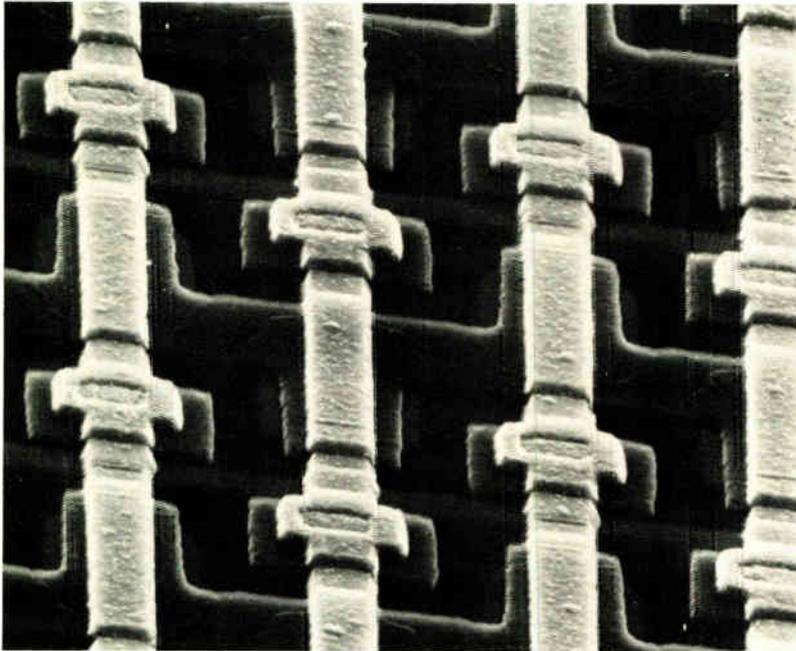

Electron-beam effects. An 8,192-bit FET RAM chip made with IBM's Vector Scan electron-beam lithography system typifies the next LSI generation. The scanning electron-beam micrograph shows the 2- μm -wide metallization lines and 1.25- μm -long gates on the chip's surface.

E-BEAM SYSTEMS ARRIVE, FLEXIBLE CIRCUITS FLOURISH

by Jerry Lyman, *Packaging & Production Editor*

□ The fine-line circuit patterns of today's advanced LSI are forcing semiconductor manufacturers to buy new and more refined lithographic and etching equipment. Last year's densest, large-scale integrated circuits could get away with the 5-micrometer line widths possible with contact printing and wet etching. But by now the move is towards 2- μm and eventually submicrometer resolution, which demands at least optical projection methods or electron-beam lithography, plus dry plasma etching.

As for the chips already emerging from the new equipment, some will undoubtedly be mounted on flexible printed-circuits, suddenly a popular choice for many industrial and commercial applications. Others may end up on bumped film-carriers, the latest approach to production-line chip handling.

Given this context, the year's most important development—the one that will have the biggest industrywide impact—is the appearance and acceptance of commercially available electron-beam systems for the manufacture of IC masks. Until 1977, most large systems of this kind were designed and constructed in house by such firms as Texas Instruments, IBM, Bell Labs, Japan's Cooperative Laboratory, the Sescosem division of France's Thomson-CSF, Germany's Siemens AG and the Elcoma division of Philips of the Netherlands. Most

machines are for precision mask manufacture, but two—IBM's ELI and the Japanese machine—are high-throughput machines for computer-controlled direct exposure of patterns on silicon wafers covered with a light-sensitive resist. The direct exposure of wafers is the ideal lithography method, because it eliminates the mask-making step and automatically compensates for wafer distortion, but it is cost-effective only on high-throughput machines.

During 1977, redesigned commercial versions of Bell Labs' EBES mask-maker have come from Etec Corp., Hayward, Calif., and Varian Associates' Extrion division, Gloucester, Mass. The \$1-million-plus machines, Etec's MEBES and Extrion's EBMG-20, take about an hour to expose a wafer up 5 inches in diameter. Extrion recently sold its first system to the mask-making firm of Ultratech Inc. in Santa Clara, Calif., while Etec has already delivered a unit to Fairchild Camera and Instrument Corp. and has another ready to go to RCA's Solid State division.

By the end of next year, there will be at least a dozen commercial electron-beam machines in operation, and for the next two to three years, their main use will be to make master masks for use in optical projection lithography. But once IC technology moves to line and space

resolutions of less than 1 or 2 μm , direct electron-beam exposure of the wafer will be required. At that time, semiconductor makers will need systems with throughputs approaching IBM's ELI, which now handles 22 2¼-inch wafers per hour.

Meanwhile, optical projection lithography is becoming an increasingly important production technique. It has proven more cost-effective for LSI than contact printing, since it prolongs mask life and offers higher wafer yield.

Virtually all of today's projection printing of LSI wafers, both in the U. S. and abroad, is being done with machines produced by Perkin-Elmer Corp., Norwalk, Conn. Built around a reflecting optic system, these units are 1:1 projection systems (the mask reproduces the entire wafer pattern and not just the individual chip pattern).

Projecting the present

The firm's latest model has an improved condensing lens for shorter exposure times. It can expose 90% of a 4-inch wafer and has an automatic load feature that permits cassette loading of wafers. All the Perkin-Elmer machines are manually aligned and can expose lines and spaces 2 μm wide with an alignment error of 1 μm .


Cobilt, a division of Computervision Corp., Santa Clara, Calif., is developing a 1:1 system that will automatically align wafers as large as 5 inches in diameter. This machine should become available next year.

Another type of optical printer now becoming available to IC manufacturers is the reduction-projection system. The mask in this case is much easier to manufacture, being an enlarged (4 \times or 10 \times) image of a single IC pattern cut out of a chrome plate. Through this reticle the system projects a reduced image onto a wafer, then gradually steps the reticle and repeats the exposure across the entire wafer. Resolution is significantly higher than with the 1:1 projection system.

For instance, the FPA 141 from the Japanese firm of Canon Inc. uses a 4 \times reticle that can print 0.89- μm -wide lines in a positive resist and 1- μm -wide lines in a negative resist. Alignment accuracy is 0.125 μm , and maximum wafer diameter is 3 inches. Throughput is 30 wafers an hour.

The Netherlands' Philips Gloeilampenfabrieken has an in-house computer-controlled wafer/mask-alignment system based on the reduction-projection principle. Called the silicon repeater (SIRE), this system projects IC patterns with a 5:1 reduction ratio onto a wafer. Minimum resolution is 2 μm , alignment accuracy is 0.1 μm , and maximum wafer size is 4 inches.

The latest machine of this type comes from GCA Corp.'s Burlington division in Burlington, Mass. Its type 3696 optical photorepeater exposes wafers to the image from either a 10 \times or 5 \times reticle and then step-and-repeats this image across the wafer, which may be up to 4 inches in diameter. With a 10 \times reticle the system can achieve resolutions of 1.25 and 1.5 μm with a throughput of 20 wafers per hour. A 5 \times reticle changes resolution to 2 μm and throughput to 30 to 35 wafers per hour. A

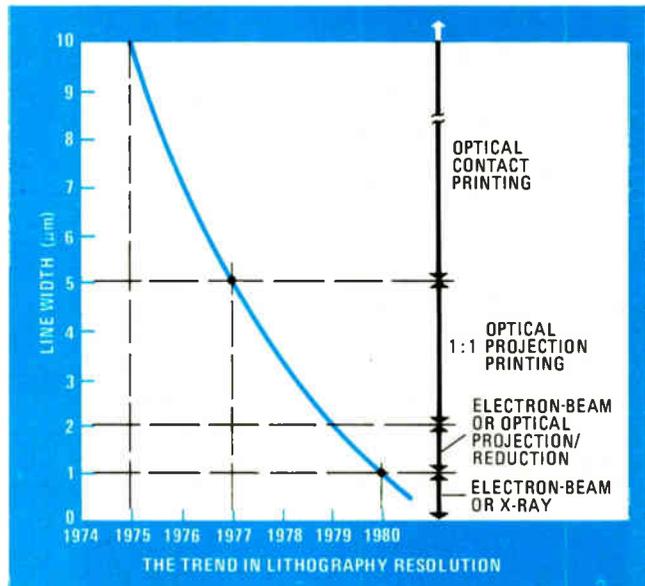

Shrinking lines. Today's integrated-circuit geometries, fabricated by optical and projection printing, are at the 5- μm level. By 1980, demands for 1- μm details will see the first large-scale employment of direct electron-beam exposure of silicon wafers.

fourth machine of this type is in development at Ultratech Corp., Santa Clara, Calif.


The new reduction-projection machines will compete with electron-beam systems for wafers with pattern details in the 1-to-2- μm range. Prices of commercial step-and-repeat optical projection units are about a third of the \$1.5 million electron-beam units. In addition, the less costly systems have greater throughputs than present commercial electron-beam machines.

The evolution of integrated-circuit lithography from contact printing to the present state of the art is shown above. By 1980, when line widths of 1 μm will be required, direct electron-beam exposure and X-ray methods should take over.

Plasma processing

As the IC industry moves to near-micrometer line widths, plasma etching is gradually displacing wet etching. Using a cloud of ionized gas as the etchant, it will be found in most new IC processing lines because of its higher yields and easier disposal vis à vis the environment. This same basic method also is being used to deposit silicon nitride on IC wafers.

At present, plasma processing is in transition, changing over from cylindrical reactors, which produced a quality of etching that could vary widely from wafer to wafer, to parallel-plate types, which produce a more uniform electric field. Also, unlike the older units, which could etch only silicon dioxide or silicon nitride, the parallel-plate equipment can etch aluminum because of the longer life of its plasma particles. For instance, two new plasma reactors from DW Industries, Sunnyvale, Calif., and International Plasma Corp., Hayward, Calif., can etch into aluminum—a development that could

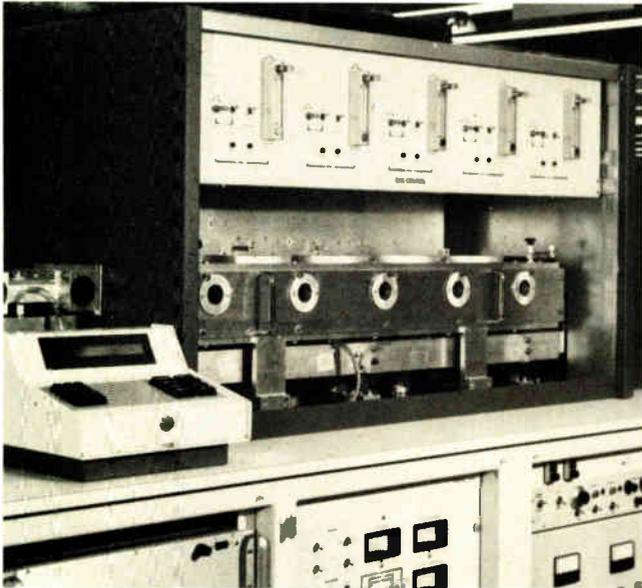

Production plasma. Cassette-to-cassette wafer handling, microprocessor control, and high throughput are important features of LFE Corp.'s System 8000 for plasma deposition of silicon nitride. These same features should appear on future plasma etching systems.

herald the elimination of all wet IC etching.

A drawback of all plasma etchers and depositors is that throughput still hovers around 40 to 50 wafers per hour. IC firms would prefer something closer to the wet-etching rate—say 150 wafers per hour.


Also, the present machines require manual loading of wafers onto a platform. The first not to do so is an in-line silicon-nitride-plasma deposition system manufactured by LFE Corp., Waltham, Mass. The system 8000, illustrated above left, automatically transfers each wafer from a cassette through a load lock that preheats them and evacuates the processing region to the low-micrometer range. The wafer then enters the processing region upon command from a microprocessor controller, receives a preset amount of silicon nitride, and is made to exit through an unload lock into a cassette receiver. Wafer throughput can be as high as 90 wafers per hour.

The LFE machine, which is not a parallel-plate unit, approaches what IC manufacturers would like to see in other depositors or in plasma etchers—in-line capability and high throughput. The future should bring larger, microprocessor-controlled, parallel-plate reactors with in-line capability. Also, etching versions of their new units will be able to handle all the materials commonly encountered in present MOS and bipolar processes.

A flexible explosion

In the fields of packaging and interconnections, one of this year's biggest stories is the growth of flexible printed circuitry. Probably 10% of all printed circuits produced will be of the flexible type, now that the material problems are solved and the approach is winning acceptance.

Flexible circuitry is changing electronics designers' approach to commercial and consumer packaging. They

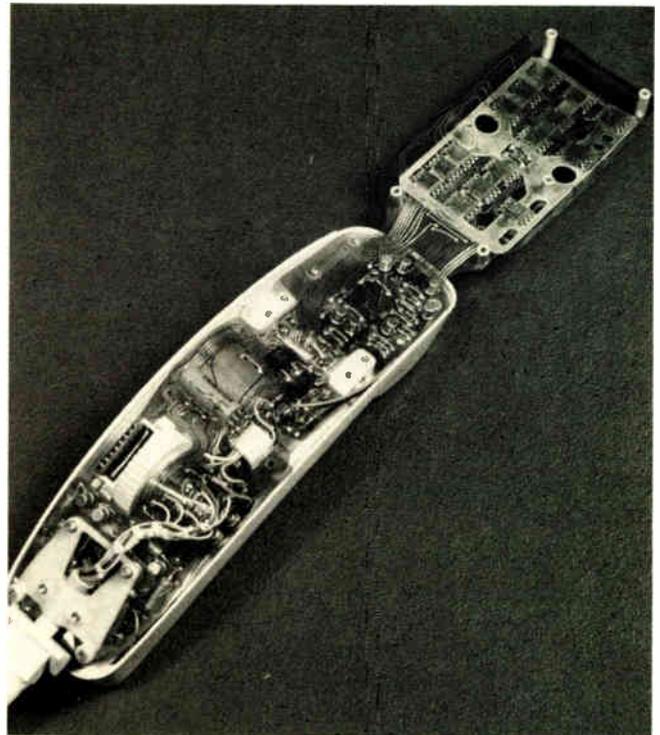

Flexible phone. Flexible circuitry lets the electronics designer bend his system to fit into an irregularly shaped volume. Shown is a sophisticated application of flexible circuits in an avionics intercom headset from Telephonics, a division of Instrument Systems Corp.

are getting away from the standard mother-daughter rigid board or card-file approaches and starting to emulate military systems by fitting the electronics wiring and components to the shape of a unit, whether it is a camera, telephone, or pacemaker. The photograph above on the right shows how complex electronic circuitry is squeezed into the headset of an airline intercom at Instrument Systems Corp.'s Telephonics division, Huntington, N. Y. Without the multiplanar packaging feature of flexible circuitry, this packaging solution would have not been possible.

Within the next few years there should be many new developments within this field. Flexible circuits subtractively etched with fine lines less than 1 mil wide (10 mils is the normal width now) should be used more and more, particularly for designs in which bare chips or film-carrier devices are bonded directly to a flexible substrate. Multilayer flexible circuits also should start acquiring nonmilitary uses.

It is already fairly usual to stiffen a flexible substrate with a bare rigid board. This has been done to enable the flexible printed circuit to support fairly heavy components. But the future will see the combination of flexible circuits with rigid boards become more usual. The two will be connected through common plated-through holes, and the flexible portions will fan out into many planes. A combination rigid and flexible multilayer board will unite the best features of the two types

Finally, simpler and cheaper connectors for flexible

Help yourself, OEM!

CORE MODULES
(256 KB in 5 1/4" enclosure; 512 KB in 10 1/2")

FEATURE	MODEL NO.	DENSITY	PERFORMANCE
Ampex 1620 compatible	94322	32K x 16 32K x 18 32K x 20	350 ns. Access 830 ns. Cycle
Size and price optimized	94400	4K x 8/9 8K x 8/9 16K x 8/9 32K x 8/9	350 ns. Access 1100 ns. Cycle
Single (+5) voltage	94405	4K x 9 8K x 9	350 ns. Access 1250 ns. Cycle

SEMI-CONDUCTOR ARRAYS

FEATURE	MODEL NO.	DENSITY	5 1/4" HIGH ENCLOSURE	PERFORMANCE
4K MOS RAM	94500	32K x 16 32K x 18 32K x 20	512 KB	325 ns. Access 450 ns. Cycle
Low-cost version	94501	32K x 16 32K x 18 32K x 20	512 KB	400 ns. Access 600 ns. Cycle
Double density	94550	64K x 16 64K x 18 64K x 20	1024 KB	325 ns. Access 450 ns. Cycle

Ask Control Data.

From Control Data, you get **both** core and advanced semi-conductor memory. You get "state of the art" in high density packaging techniques. (Example: the 94550 semi-conductor memory provides 1 megabyte in the 5 1/4" rack shown above!) You get **competitive pricing**, in custom or off-the-shelf standard configurations!

Also available:

UNITEMP core. In 13-mil and 18-mil sizes. UNITEMP is the temperature-independent magnetic ferrite core stable over the entire MT temperature range (0°-90° C).

Enclosures. For mounting core or semiconductor modules in standard EIA 19" racks.

Cabinets measure 5 1/4" or 10 1/2" high, 20" deep; cards mount horizontally. Self-contained cooling fans direct air horizontally across the modules. Both core and semiconductor modules can be incorporated to a maximum of 1 megabyte.


Phone (612) 630-6018 or write: Richard J. Koebler, OEM Marketing Manager, Computer Memory Manufacturing Division, 8001 East Bloomington Freeway, Bloomington, Minnesota 55420. Please tell me more about your OEM Memories!

NAME _____ TITLE _____
 COMPANY _____ ADDRESS _____
 CITY _____ STATE _____ ZIP _____ PHONE _____

Ask our **oem** people

GD CONTROL DATA CORPORATION

You won't find a more versatile teleprinter for the price. It's that simple.

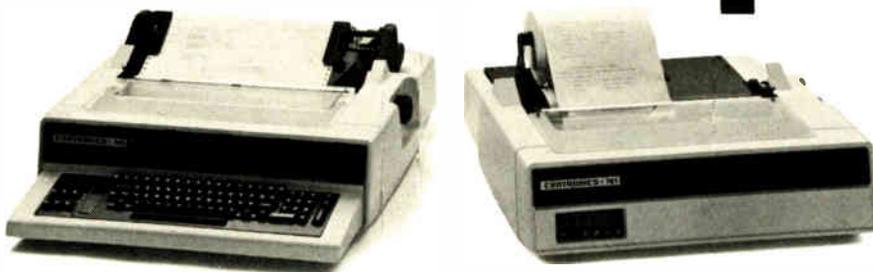

The New Centronics Model 761.

No other teleprinter offers you more operating features—or a lower price. Because the 761 gives you micro-processor-control for maximum flexibility *and* lower-priced options.

Plus, the 761 gives you easier, more versatile operation . . . with maximum printout visibility . . . typewriter-style electronic keyboard that anyone can use without special training . . . table-top or free-standing installation . . . pinch roll, pin-feed platen or tractor paper handling systems . . . and a wide choice of 300 baud serial interfaces . . . in KSR and RO models.

And when you need fast, dependable service, remember the 761 is backed by one of the industry's best service programs. More than 100 professionally staffed service offices worldwide . . . a unique on-line diagnostic test center . . . central dispatch with toll-free phone access . . . and maintenance contracts as attractively priced as the 761.

More versatility, better service and reliability proven by more than 80,000 Centronics printers installed, make the 761 teleprinter simply a better choice. The *only* choice. Call today for details. Centronics Data Computer Corp., Hudson, N.H., 03051, Tel. (603) 883-0111 or Centronics Offices in Canada and throughout the world.

CENTRONICS® PRINTERS
Simply Better

circuitry should appear, as should a lower-cost material with properties approaching Kapton's good high-temperature properties and solderability.

Bumped film-carriers

A new development in the film-carrier technology, a carrier with bumps, may allow an even greater use of this method, which is so well suited to automation. Normally a film carrier is either a sprocketed, nonconductive film having a copper surface etched with IC interconnections or else a thin all-copper sprocketed strip with IC interconnects etched out. Both systems need special chips to which raised, metallic input/output pads have been added. The bumped chips are then automatically gang-bonded to the inner leads of the carrier's IC interconnection patterns.

These two kinds of film-carriers are available from at least four companies: International Micro Industries, Cherry Hill, N. J.; 3M Co.'s Electronic Products division, St. Paul, Minn.; Fortin Laminating Corp., San Fernando, Calif.; and the Dyna-Tape division of Dyna-Craft Inc., San Fernando, Calif.

In house, IC manufacturers have used the approach to put high-volume small-scale ICs on film, adding bumps to, say, transistor-transistor-logic devices destined for plastic dual in-line packages. But few of them have proved willing to supply customers with appropriately bumped chips, and this dearth has slowed the spread of

film-carrier techniques into the hybrid field, where chips on film could be bonded directly to ceramic substrates.

Last year, though, Pactel Corp. of Westlake Village, Calif., changed things somewhat by adding bumps to the carrier, not the chip. But then it did not supply the polyimide tape in anything longer than short strips—fine for a developmental hybrid application but not the reels that a production facility needs for mass-bonding of chips to film.

An easing of this situation should occur early next year, when Dyna-Tape will come out with reels of a metal-bumped film-carrier in 11- and 14-mm widths. Chips mounted on it will not be isolated from each other and will therefore be untestable. So within the year there will be a follow-up product, a 19-mm-wide film-carrier that is testable as well as bumped. Like the first tape, it will be available in reels.

The new freedom to bond conventional chips to film carriers will affect two areas: IC companies at present not supplying chips on film-carrier, and the hybrid field. With the new bumped tape, it will be possible for any IC house to supply large or small quantities of conventional chips either in reels or on strips of tape. The small quantities of chips bonded to tape are especially needed in the thick- and thin-film hybrid field. Hybrid companies, experienced in all types of bonding, will now be able to order their own custom tapes and bond the chips to the film themselves.

PROFILE

The man behind the gun

The gun counts for a lot, if not quite everything, in scanning-electron-beam microscopes and electron-beam lithography systems, and in the newer equipment it is a lanthanum-hexaboride electron gun. Providing much higher brightness, better mechanical stability, and much longer life than previous tungsten units, it was developed in 1967 by Alec N. Broers of IBM's T. J. Watson Research Center, Yorktown Heights, N. Y.

Broers, a native of Australia, is one of the pioneers in electron-beam lithography. As far back as 1963, at Cambridge Instruments in England, he was using an electron beam to expose submicrometer patterns on resists. In 1965 he joined IBM as research staff member, and in 1977 he became an IBM fellow. Throughout that time he has worked on developing precision electron-optical equipment and applying it to microscopy and microcircuitry.

By the mid 1970s, Broers had succeeded in building a surface scanning electron microscope around the lanthanum-hexaboride gun that achieved a resolution of 50

angstroms, as compared with the 150 angstroms occasionally achieved by commercial instruments. More recently, a member of his group at IBM, Oliver C. Wells, conceived a new low-loss imaging method, which Broers incorporated into the microscope to improve its resolution to 20 angstroms, corresponding to a smallest resolvable surface feature of 7 angstroms or less.

As he improved the resolution of scanning microscopes, Broers exploited their ever smaller electron spot sizes to fabricate experimental ultraminiature devices. Already in the 1960s, he and members of his group had fabricated transistor structures with 0.5-micrometer line widths and acoustic surface wave transducers with 0.15- μm lines on 0.5- μm centers.

More recently, a group reporting to Broers designed and built the Vector Scan One (VS1) electron-beam lithography system [*Electronics*, May 12, 1977, p. 89] and with it did the lithography for an 8,000-bit memory chip with 1.25- μm lines.

Last year, Broers went still further, with a new technique that produces 80-angstrom-wide lines and spacing. This technique has great scientific potential, since it may permit the manufacture of the first practical X-ray lenses and of super-lattice-like field-effect-transistor structures.

Says Broers: "There is still a lot of growth potential in scanning-electron-beam lithography. Advanced electron-optical concepts and faster control electronics should increase their throughput. Another important trend will be a major overall reduction in their cost."





VTR takes off. Coming onto the market is a deluge of home video-cassette-tape recorders developed by Sony Corp. in the Beta format, and Victor Co. of Japan in the VHS format. Shown is JVC's two-hour-play unit.

DIGITAL TAKEOVER EXTENDS TO TV AND AUTO CONTROLS

by Gerald M. Walker, *Consumer Editor*

□ At least two microprocessors in every garage and one watching the chicken pot pie: Herbert Hoover would approve of the American home of the next half decade. The nation's first engineer President would also appreciate the staggering potential that digital electronics and large-scale integration have for change in the daily life of the consumer.

This year marks the return of video technology into the consumer-products spotlight. Television games are mushrooming, TV-set tuning is going even more automatic (thanks to microprocessors and similar chips), and video-tape recorders for the home are poised for a takeoff. In fact, entertainment-electronics makers are betting that home VTRs will be as big a market sensation as color TVs were, especially when technological advances knock the \$1,000 price tag down. Technological spinoffs are the still-infant audio tape and disk players that use pulse-code modulation for ultrahigh-fidelity sound reproduction.

Of course, other consumer areas have seen technological advances in the past year. Calculators have extended their range in both directions: simple devices that hover around \$10 in price and expensive units that rival computers. More programmable appliances are certainly on the way, although for the moment the field is the

property of microprocessor-controlled ovens. But perhaps the most significant momentum in the incorporation of digital electronics into consumer products is found in the design of everyone's favorite appliance: the automobile.

Home VTRs gear up

Japan's electronics makers have more than 20 years' experience with video-tape recorders and can point to even longer-term familiarity with audio tape players. So it should come as no surprise that the force behind the development of home VTRs is from the Far East rather than from America.

The two chief formats for home VTRs—the Beta format pioneered by Sony Corp. and the Video Home System pioneered by Victor Co. of Japan—are undergoing intensive development to reduce tape use. Such a reduction gives longer play, which is at the heart of a successful low-cost unit (the devices now cost about twice as much as the TV sets with which they work).

In their standard-play mode, systems using either format will record an hour's program on the equivalent of less than 2 square meters of tape. In their extended-play modes, they require less than 1 m² of tape. In 1969, the standard Japanese VTR format took 9 m²/hr.

TABLE 1: COMPARING BETA AND VIDEO HOME SYSTEM FORMATS

Feature	Beta Sony Corp.	VHS Victor Co. of Japan
Recording time	1 hr (2 hr)	2 hr (4 hr)
Tape speed	4.0 cm/s (2 cm/s)	3.34 cm/s (1.67 cm/s)
Video track width	58.5 μ m (29.2 μ m)	58 μ m (29 μ m)
Relative tape speed	7 m/s	5.8 m/s
Fm carrier frequency		
white peak	4.8 MHz	4.4 MHz
synchronization tip	3.5 MHz	3.4 MHz
Chroma frequency	688 kHz	629 kHz
Audio track width		
monaural	1 mm	1 mm
stereophonic	0.35 mm	0.35 mm
Head cylinder diameter	74.5 mm	62.0 mm
Azimuth angle	7°	6°

() = long play mode

Source: Matsushita

The Sony models and the VHS units manufactured by Matsushita for the American market are helical-scan, two-head units that use 1/2-inch tapes. Although the two formats have many similarities, they are not compatible (see Table 1). But the way they both have achieved reduced tape consumption is to narrow the video tracks to slightly under 60 micrometers and to eliminate guard bands between the individual tracks.

However, these developments mean significant pickup of signal from adjacent tracks, and they require measures to eliminate the crosstalk. Separate methods overcome luminance and chroma interference between adjacent tracks. Shifting the azimuth of the two heads in opposite directions from the perpendicular to the track obtains interference rejection between frequency-modulated luminance signals on adjacent tracks.

To deal with the chroma problem, the Beta and VHS recorders use different phase-shift schemes—but they end up with similar results. The phase of the chroma carrier is manipulated during recording and playback so that the two successive horizontal video lines played back on the same track are in phase, but those of comparable lines on adjacent tracks are 180° out of phase. When the successive chroma signals are added together, they cancel the signal from adjacent tracks.

The work that is going into perfecting extended-play versions of VTRS is part of the drive to enhance their commercial potential. Such add-ons as a microphone and a camera will bring those units that can record and play back into the realm of home TV studios. Of course, the VTRS can play back cassettes furnished from other sources—some U.S. entrepreneurs are supplying cassettes of first-run movies (not always legally).

If digital encoding can bring a television studio into the home, it can also bring in the sound of a concert hall. So reason the Japanese electronics firms that are working on pulse-code modulation for tape and disk audio players. The tape systems make it possible to

record and play back what the Japanese are calling super hi-fi, using a VTR. The disk system operates like an optical video disk in that a laser encodes information on the disk with playback by a laser scan.


PCM for audio buffs


Sony was first to introduce a PCM adapter that converts the video channel of its Betamax VTR to an ultrahigh-fidelity stereo tape deck. The analog-to-digital converter and coder convert incoming audio into a 1.762-megabit-per-second PCM stream on the tape. The decoder and digital-to-analog converter return the stream to original audio, which is fed into an amplifier-speaker system. The system features a frequency response flat within 1 decibel from 2 hertz to 20 kilohertz. Harmonic distortion is less than 0.03% at all frequencies.

High performance such as this is bound to attract audiophiles, once prices of the equipment come down. So a number of other Japanese firms are hard at work developing similar systems.

The PCM disk also holds great potential in the stereo-buff market. So far, Sony, Hitachi, and a group headed by Mitsubishi have all announced development of disk systems. Again, other Japanese firms are also hard at work on it. Since the records will be the key to the success of these players, all the participants have agreed that there should be a standard format. But the audio industry has a sorry history on standardization; to wit,

Programmed. The Texas Instruments model 58 and 59 calculators have a library of 16 programs for special applications. The program modules that plug into the back of the calculator may be altered if necessary by entering changes through the keyboard.

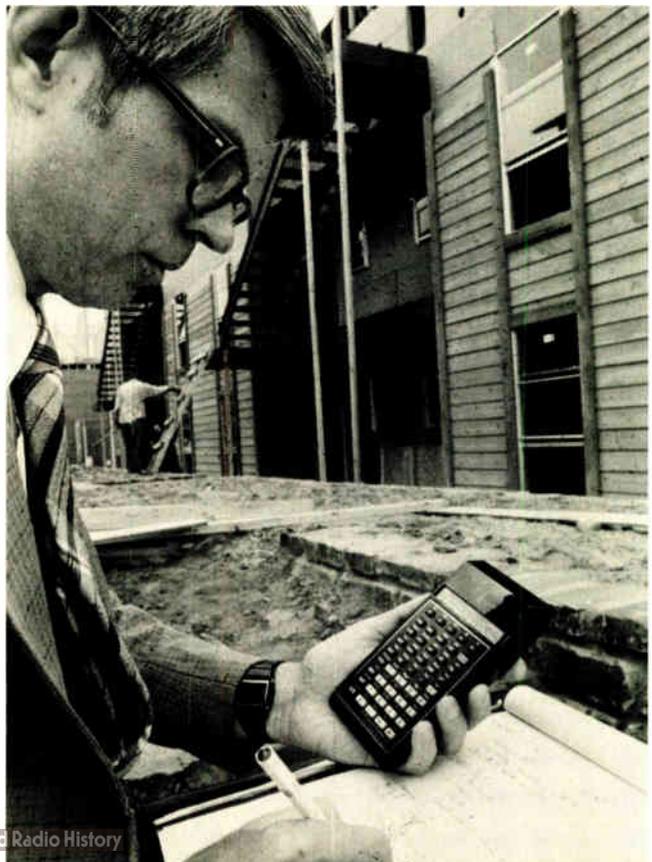

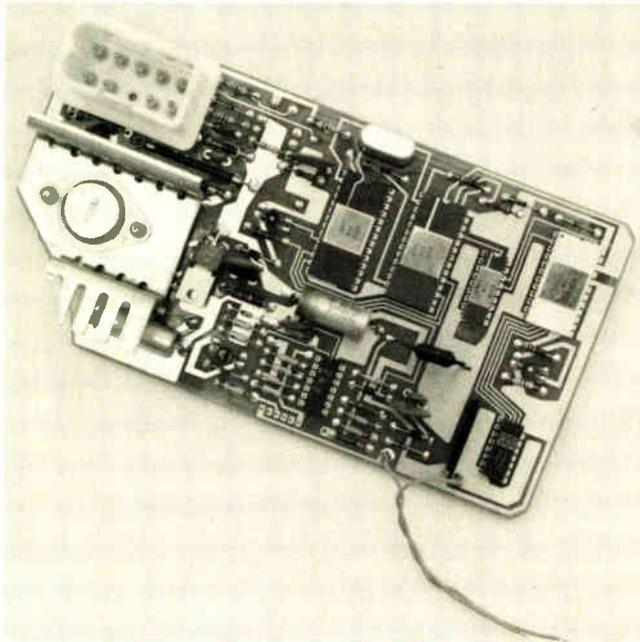

Spark advance. The Chrysler Corp. lean-burn spark-advance system, introduced as a two-board analog system, has been designed into a microprocessor-based digital control. In test runs this year, it consists of controller, ROM, RAM, and C-MOS I/O chips.

two different long-playing speeds, two incompatible four-channel stereo systems that have not made it, and three different tape formats.

Similarly, there are two formats vying in PCM disks. The Mitsubishi and the Hitachi types use frequency modulation while Sony has what the firm calls delayed modulation, which permits longer playing time. To avoid dropout problems, these systems are using redundancy of about 50% extra bits to correct for errors. Mitsubishi and Sony use helium lasers in their players, and Hitachi has a space-saving solid-state laser.

The disks are quite similar to those used in optical-laser video players developed by Philips in Europe and MCA in the U. S. They spin at 1,800 revolutions per minute, with pick-up by reflection of a laser beam positioned by three servo systems.

LSI into the driver's seat

Driven by ever-tightening Federal regulations for emission control and fuel economy, automotive electronics has shifted into high gear [*Electronics*, Sept. 29, p. 83]. The design effort includes lean-burn spark-advance systems, exhaust-gas recirculation, fuel metering or electronically controlled carburetors, and electronic fuel-injection systems.

But there also is gradual replacement by electronics of electromechanical parts such as headlamp controls, windshield-wiper controls, and the like. In addition, electronic ignition systems and voltage regulators are going into second and third LSI generations, primarily to gain greater integration and thus more compact units.

Auto companies around the world are working toward

the day when the various control systems can be combined into a set of microprocessors. A major design hurdle is the need for reliable, low-cost sensors linked to the processors. For instance, the same temperature and speed inputs are used by two or three different engine controls. Table 2 gives a rundown of potential automotive applications for electronics.

Perhaps the next major challenge in arranging the microprocessor systems that will control the cars of the 1980s will be multiplexing. Experimental multiplexed systems have been designed with fiber-optic transmission and with conventional three-wire loops. Both types have proved successful, but cost is still a stumbling block.

Even though car designers may combine two or three engine-control microprocessors into just one device, other processors will be added for other functions, such as diagnostics, multiplexing, radio tuners, and so on. So by the mid 1980s, cars could contain from four to eight microcomputers.

TV's digital pace steps up

Automatic color controls were an important feature of last year's TV sets, as was the tripotential gun from Zenith. Refinement of the controls continues, and the tripotential gun seems on its way to more widespread adoption—and to finding competition. But the big news in the coming year will be the development of more versatile digital tuning, often incorporating infrared remote tuners that circumvent the interference problems sometimes encountered with ultrasonic signals.

The trend toward adding such features as memory, push-button channel selection, and digital readouts began a year ago, and it became increasingly clear that microprocessors would be employed to control the variety of jobs that these tuners must perform.

U. S. manufacturers are showing interest in dedicated chips for their tuners rather than general-purpose microprocessors. For instance, sets from GTE-Sylvania's Entertainment Products division, Batavia, N. Y. use the General Instrument Omega system: a microprocessor-like n-channel metal-oxide-semiconductor control, a nonvolatile electrically alterable read-only memory, an n-MOS display driver, and a complementary-MOS digital-to-analog converter.

General Electric's Portsmouth, Va., Television Receiver department has a tuner with a similar chip, designed around phase-locked-loop channel-selection. GE also is featuring an infrared remote control—the first among U. S. set makers.

Quasar's Japanese parent, Matsushita, has developed a custom microprocessor for the Franklin Park, Ill., set maker. Besides channel selection, the device controls a frequency search, ramping the tuning voltage to the varactor diodes to sense the presence of a TV signal.

A much more elaborate microprocessor application shows up on a Blaupunkt-Werke GmbH receiver. Besides tuning, the three-chip Fairchild F8 processor turns the set on and off at times programmed into its memory as long as one year in advance. It also uses stored data to

THE TELETYPE[®] MODEL 43: ALL THE TALK YOU'VE HEARD ABOUT IT IS TRUE.



When something as good as the Teletype model 43 teleprinter comes along, it naturally generates a lot of talk. And for a lot of good reasons.

Delivering true 30-character per second throughput, upper and lower case printing in a 132-column format, the model 43 has an exclusive, Teletype-developed 9-wire matrix impact printhead mechanism. This unique feature provides superior service life as well as exceptional print quality, even on multiple copies.

Under the cover, we kept hardware and moving parts to a minimum for maximum reliability. Solid-state circuitry and only five modular components—plus a built-in test capability—mean service is not

only fast, but also simple.

Another convenient cost-saving feature of the model 43 is that it's designed to use 12" wide by 8½" long tanfold paper. Tear off the serrated margins and you've

got a 132-character line on the handy 11" x 8½" paper.

When you add up all the model 43's features, you'll think there's been a mistake when you see the low price. But it's true. Because on a price/performance basis, the model 43 is simply unsurpassed.

The Teletype model 43. After all the good things you've heard about it, no wonder nothing even comes close.



Teletype is a trademark and service mark registered in the United States Patent and Trademark Office.



Coming through...

with help getting your ideas off the ground

Whether you're thinking about new "black box" designs or better ways to work with wire, we can help get your ideas off the ground.

Involving Belden in the early stages of a project will almost always pay off in a cleaner, more economical package. It can also keep knotty—and costly—problems in compatibility, workability and availability from arising later.

We're coming through with extensive capabilities in problem solving and custom design. Plus thousands of high-quality wire, cable and cord products to draw from—including our new flat cable constructions.

Our know-how in the areas of insulation compound-

ing, shielding, innovative packaging, quality control and time/motion have resulted in some extraordinary savings for our customers.

Talk to a Belden specialist about your new black box ideas, processing and application problems—all your wiring needs. For fast answers to special problems, call our engineering "hot-line" number, 317-966-6681. You'll like the results.

Whether your needs can best be met through our nationwide team of electronic distributors or through a totally new cable design, we won't let you down. Belden Corporation, Electronic Division, P.O. Box 1327, Richmond, IN 47374; 317-966-6661.

8-4-7

The Belden logo, consisting of the word "BELDEN" in a bold, sans-serif font followed by a stylized circular symbol.

Coming through...

with new ideas for moving electrical energy

Circle 144 on reader service card

World Radio History

© 1977 Belden Corporation

control contrast, brightness, color saturation, and volume for each channel [*Electronics*, Sept. 2, p. 36].

The F8 in the West German set also implements a tuning function called step search, in which channels without a transmission signal are skipped during automatic tuning. It also turns the set off once a station stops transmitting. In fact, the Blaupunkt set may serve to acquaint its owner with the versatility that programmable appliances can bring to the home.

A year ago, Zenith Radio Corp. of Chicago was trumpeting its new picture tube with a tripotential gun. While the tube itself elicited no interest from other TV manufacturers, the gun has. With its extended-field lens, the gun improves picture sharpness by reducing spot size 50% compared to that of conventional bipotential guns. Zenith is supplying the gun in its conventional picture tubes to other TV set makers.

Now RCA Corp.'s Picture Tube division in Lancaster, Pa., is bringing out a tube with a bipotential gun that it claims achieves a spot size almost equal to that of the tripotential tube. Improved focus comes from a redesigned beam-forming optical system and an increase in the voltage on the focusing electrode from 5.5 kilovolts to 8.5 kv. Moreover, the gun does not require the fourth 12-kv focus electrode of the tripotential gun.

More ground rules for games

The increasing rough and tumble of the TV-game business has induced equipment makers to offer more games and more varied playing features. For the upper price bracket, the answer has been mating a microprocessor with digitally encoded tape-cartridge programs. Fairchild's programmable game, using an F8, has been joined by Bally, and Atari to name two. Some of these use custom-designed microprocessors, and others use standard devices such as the CP 1600 and PIC 1650 from General Instrument Corp., Hicksville, N. Y.

However, devices that the game maker can program are not the whole ball game. To cover a wider range of prices and game types, both GI and Texas Instruments Inc. of Dallas have introduced families of standard circuits around which a manufacturer can build a number of different game packages. For example, GI's new Multigame Basic Circuits let the games maker choose among four basic games chips and then add playing features or other games with additional chips. Similarly TI's Universal Game Circuits provide various combinations of standard circuits to construct a game tailored to the intended selling price. The intent behind these offerings from both companies is the same: to avoid the high front-end investment and long lead time of dedicated chips while approaching the variety of the programmable units.

One-chip games here

The wave of the future may be signalled by TI's recent introduction of the first of a family of single-chip games. By next year, the family will include strategy and action games, possibly with color and digital scoring, and all at

TABLE 2: ELECTRONIC SYSTEMS FOR THE AUTOMOBILE

Closed-loop engine control	Sleep detectors
Dual-displacement engine control	Automatic vehicle guidance
Electronic fuel injectors	Road coefficient detector
Automatic cruise control	Multiplexed wiring
Automatic brakes	Engine knock-limiting control
Automatic diagnostic systems	Low-tire-pressure indicators
Exhaust-gas regulation	Digital dashboard display
Radar crash sensors	Emergency location transmitter
Vehicle blind-spot detectors	Alcohol ignition interlock

Source: General Motors

highly attractive prices.

But the big news in electronic games does not include TVs at all. It is the move of microprocessors into self-contained games coming out from the traditional toy makers like Parker Brothers, Milton Bradley, and Mattel. In these games, the processor acts as another player and the displays are implemented with light-emitting diodes or liquid crystals. So far, the applications require no new technical developments, but the field is in its infancy and the game makers are deadly serious about their electronic future.

The basic hand-held calculator has become so cheap that it is almost a back-to-school item just like a lunchbox. So development has swung to the programmable calculators at the other end of the spectrum. In fact, as the distinction between key-programmable and card-programmable units has blurred, the offerings are getting closer to becoming miniature computers. For example, TI's Programmable 59 features plug-in read-only memories. Each 40,000-bit module may contain 5,000 program steps, and once the program is inserted into the calculator, it may be changed from the keyboard. The ROM modules may be used with 3-in.-long magnetic program strips that slide into the calculator to record the revised program.

Another feature of the Programmable 59 that may spark emulation is its ability to repartition program and memory, much like a computer. The 10 MOS random-access-memory chips provide a capacity of 960 program steps. The program can be shifted in 80-step blocks, each of which provides 10 more registers, up to a maximum of 100. Thus the calculator, set up for complex operations with few variables that require more program steps than data storage, can be altered to handle short programs with many numbers. Such programs usually require more data storage than they do program steps.

The fierce shakeout raging in the American digital-watch market is taking precedence over development of

new solid-state circuitry. There is more attention to displays, with liquid crystals staging something of a comeback over LEDs because they can be multiplexed to increase reliability. Electrochromic and electroluminescent displays also look like they will be getting attention. On the high end of the market, the calculator watch is showing up from several firms. Hewlett-Packard, for one, has designed its new HP-01 watch for time-oriented calculation.

Since battery life is a sticky point with digital watches, attention is shifting to that component. Solid-electrolyte lithium cells have recently been introduced in watches and calculators. Such cells offer energy densities of 150% to 200% greater than cells with liquid organic electrolyte. For instance, lithium-iodine solid-state batteries have an energy density of 0.6 hour per cubic centimeter at 2.8 volts. Another important feature of the electrolyte is its self-discharge rate: lithium iodine has less than 5% self-discharge in 10 years, which makes it ideal for a digital-watch application.

If there was ever any doubt that the microprocessors

would make it big in the home, the programmable microwave oven overcame it. Microwave units had been around for years, but there was little interest among consumers until programmable ovens came along, featuring ease of use as well as precision timing.

Now the name of the game is to expand the programmability. Tappan Appliance Corp., Mansfield, Ohio, incorporates the TMS 1100 microprocessor from TI into a range that offers programming of time and temperature cooking—as do other new models—plus a feature that lets the cook program the cooking cycle well in advance by punching in the starting time.

What with programmable TV tuners, programmable games and programmable ovens, consumers are becoming familiar with digital electronics' adeptness at performing familiar tasks and its possibilities for extending digital control into untapped areas. The progress of the home computer probably holds the key to full-scale development of the electronic home, but the thrust to bring interactive information systems into the home is another vital ingredient.

PROFILE

The three who perfected GE's automatic color control

Ever since the top management of General Electric Co.'s Television Receiver department in Portsmouth, Va., set out to be among the technological frontrunners, its design staff has pushed unconventional development efforts. Perhaps the most significant is the automatic color control based on the external, vertical-interval-reference signal [*Electronics*, March 31, p. 25]. This receiver feature, which takes advantage of a broadcast industry standard designed to provide uniform color transmission from one channel to another, posed several knotty problems for three GE engineers identified with the project.

One of the early problems was the standard itself. "We wanted a couple of changes in the standard to make it more convenient to use in the receiver," says Michael Palladino, manager of advanced circuitry and display engineering (center in photograph). However, it was so far along it could not be changed. So, notes Palladino, a member of the Electronics Industry Association committee responsible for drawing up the standard, "we had to find a way to use the signal as is."

Palladino, 51, who received a bachelor's degree in electrical engineering from the University of Washington in 1951, conducted the feasibility study for incorporation of the VIR feature into GE's color sets. Just as he likes to do his own auto-mechanic work, he did the circuit development and breadboard work on the prototype system.

The GE design team soon faced another headache. "In the first experimental transmissions by the networks, we very seldom had VIR signals available to us. That made it tough to evaluate the receiver's operating characteristics," notes the 25-year veteran of the TV department.

As the broadcasters got their act together and as more of them transmitted the VIR signal, GE began converting its concept into a practical, cost-effective module. That became the responsibility of Sanjar Ghaem (left), manager of the color TV electrical design engineering group. The 41-year-old Iranian received his BSEE in 1960 from


Chicago Technical College. Although he has 13 U.S. patents in the TV field, the 17-year GE veteran's role was to coordinate VIR activities, "rather than actually contributing to the solution of any problems," he says.

Perhaps the biggest headache in the program, notes VIR project leader Howard Holshouser (right), was designing a system immune to noise. Holshouser, 35, and holder of a BSEE degree from North Carolina State University in 1967, did the nuts-and-bolts work to get the system in form for production.

However, notes the 10-year GE designer, "we had to deal with white noise, Gaussian noise, and pulse noise generated by passing cars," among other signals that look just like the VIR signal. To make the technique work in that environment, he derived a solution for which a patent application has been filed. "We came up with a group of different circuits that collectively performed the function, but individually weren't worth a dime," says the holder of two other patents.



There's a little tiger in every Cherry switch

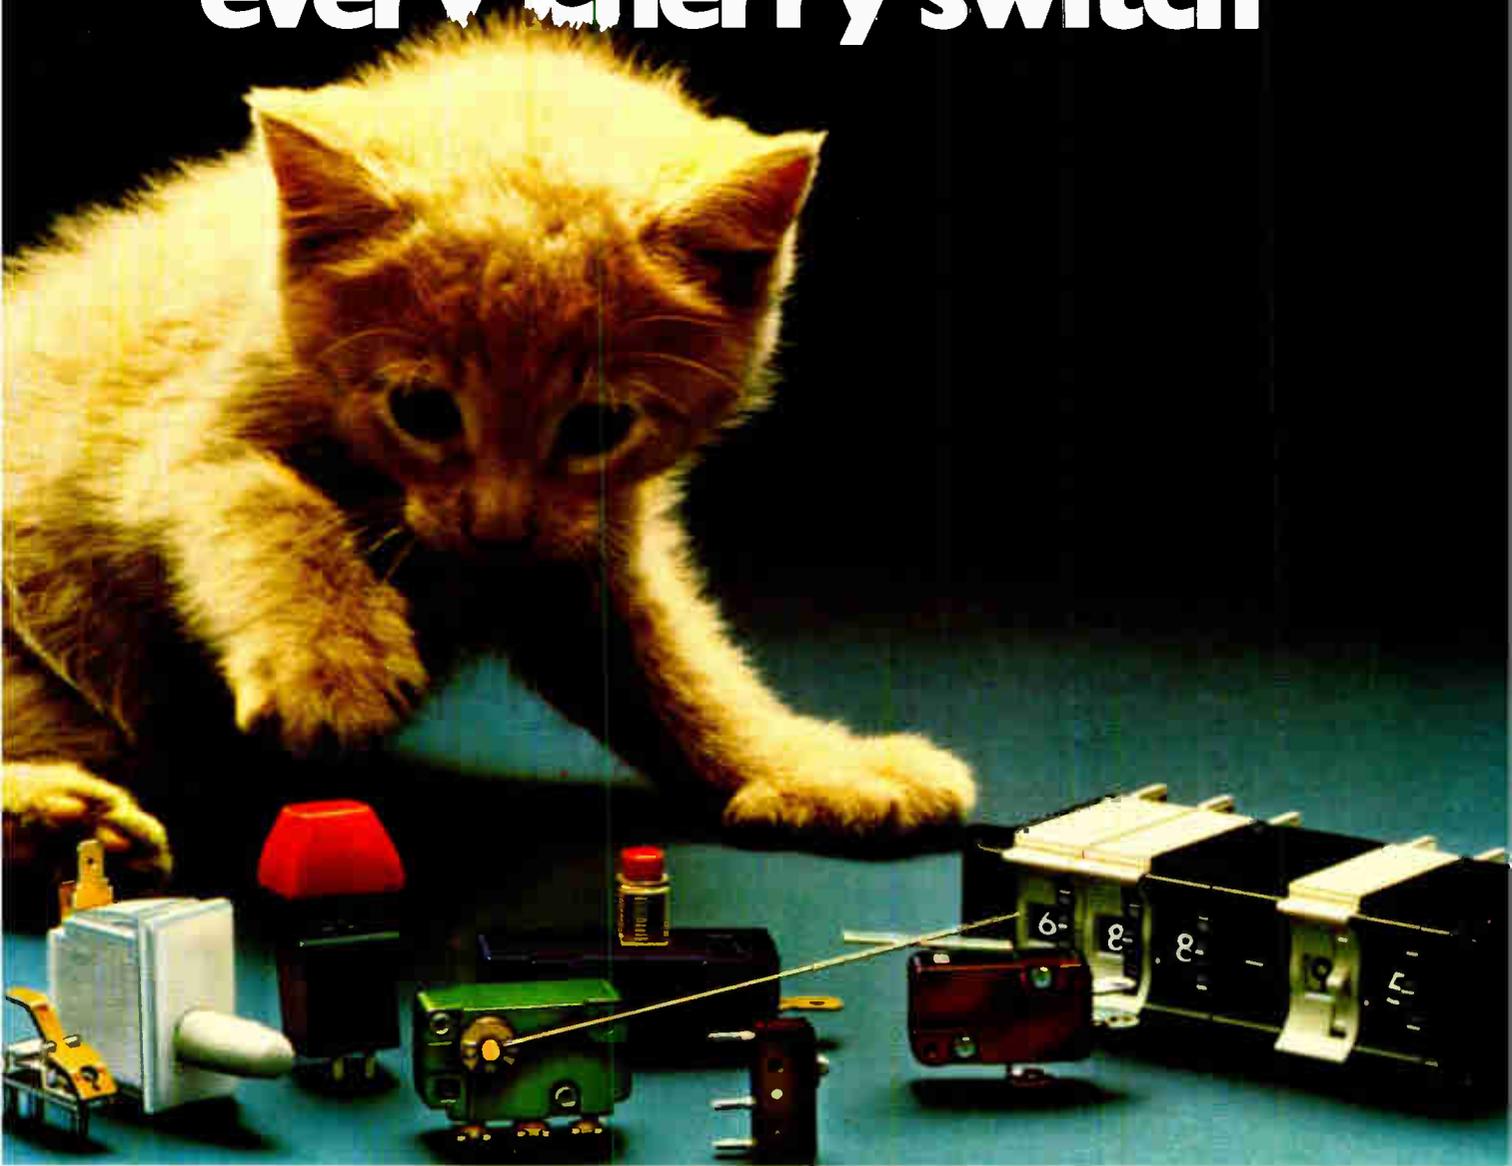

...but we're pussycats to do business with

Our products are tough, but our people aren't... and that's the beauty of dealing with Cherry.

You see, we can control the quality of our switches because we fabricate most of our own parts (moldings, stampings, springs, printed circuits, etc.) And we can keep the price down because we're loaded with automatic equipment to handle high volume.

But the real difference is in the *people* you work with at Cherry... from your first contact with a technically trained sales representative... through careful analysis and recommendations by engineers

who are really concerned about *your* problem... to production scheduling and customer service men who follow-up and expedite to make sure we keep our delivery promise to you.

Of course we're proud of our modern facilities and equipment... but what we're proudest of is our reputation for customer service. Try some.



Test a free sample "tiger" from the pussycats at Cherry. Ask for our latest catalog which contains complete information on all our switches and keyboards, and we'll include a free sample switch. Just TWX 910-235-1572... or PHONE 312-689-7700... or circle the reader service number below.



CHERRY ELECTRICAL PRODUCTS CORP. • 3608 Sunset Avenue, Waukegan, Illinois 60085
SWITCHES and KEYBOARDS — Available locally from authorized distributors.

- October 1976**
- Lithic Systems Inc. introduces first single silicon chip housing all the active functions needed for an a-m transceiver. *Oct. 14, p. 32*
 - Interactive fiber-optic CATV network to begin two-way tests with 300 subscribers near Osaka, Japan. *Oct. 14, p. 39*
 - Better than 10% efficiency is reached with 10-by-10-cm solar cells developed by Germany's AEG-Telefunken for terrestrial applications. *Oct. 14, p. 55*
 - Siemens of West Germany announces the model 3352 electrophotographic laser printer, which scans a maximum of 70,000 characters per second *Oct. 28, p. 64*
- November 1976**
- Electro-optic crystal modulator developed by Sperry Rand allows direct modulation of light beam, permitting switching and multiplexing of optical bit streams. *Nov. 11, p. 32*
 - I²L chip, providing PLL frequency synthesizer for CB radio, developed by Motorola in Japan. *Nov. 11, p. 53*
 - IBM announces its entry into the minicomputer market with the Series/1. *Nov. 25, p. 41*
 - Solar Technology International uses thick-film screened-on inks to put contacts on silicon solar cells. *Nov. 25, p. 53*
 - The industry's first single 5-V ultraviolet-light-erasable PROM technology is developed by Intel for 8-bit single-chip microcomputer (8748) and stand-alone 16-k erasable PROM (2716). *Nov. 25, p. 99*
- December 1976**
- U. S. National Bureau of Standards decides to adopt the encryption algorithm proposed by IBM. *Dec. 23, p. 42*
- January 1977**
- Federal Communications Commission approves the use of antennas 4.5 m in diameter for receive-only CATV earth stations. *Jan. 6, p. 33*
 - Motorola wins contract to supply General Motors with microcomputer chips for various control functions in GM's cars over the next few years. *Jan. 20, p. 31*
- February 1977**
- Sperry Univac introduces its first small business system, the BC/7. *Feb. 3, p. 35*
 - Joint Electron Device Engineering Council (JEDEC) writes a standard for a family of 50-mil-spaced LSI chip carriers and sockets for pc board use, allowing interchangeability of five different types of chip carriers. *Feb. 3, p. 44*
 - Bell Laboratories gives first bubble memory a trial in a Michigan Bell Telephone Company switching office. *Feb. 17, p. 38*
 - Hewlett-Packard discloses a 16-bit microprocessor chip built with C-MOS-on-sapphire technology, for high-performance control applications. *Feb. 17, p. 82*
- March 1977**
- Industry's first high-performance 5-V MOS processes emerge from the labs of Intel and American Microsystems. Intel (H-MOS) and AMI (V-MOS) both promise 1-k and 4-k static RAMs that rival bipolar performance (access times below 50 ns) and 65-k ROMs with speeds under 200 ns. *March 3, p. 32*
 - A shapable magnetic shielding material, Metshield, made of a soft-magnetic glass, is announced by Allied Chemical Metglas Products. *March 3, p. 138*
 - FCC approves 800-MHz cellular mobile radio-telephone system proposed by Illinois Bell Telephone for Chicago test. *March 17, p. 32*
 - West German research institute invents the fluorescence-activated display, FLAD, which exhibits the same low power dissipation as the LCD but yields much higher light intensity. *March 17, p. 55*
 - With its high-performance linear bipolar process, Precision Monolithics makes the first 12-bit d-a converter in monolithic form. *March 17, p. 130*

Significant advances in electronics technology reported over the past year in *Electronics*

- April 1977**
- IBM announces the System/34 business computer. *April 28, p. 30*
 - A high-speed digital facsimile machine produced by 3M Co. sends a 300-word letter in about 20 s when transmitted at the unit's top speed of 9,600 b/s. *April 28, p. 36*
- May 1977**
- Texas Instruments introduces first microprocessor-based 40-channel combination a-m and single-sideband CB radios. *May 12, p. 31*
 - Philips Gloeilampenfabrieken develops a reduction-projection mask aligner with an alignment accuracy of 0.1 μm . *May 12, p. 32*
 - For the first time, Burr-Brown builds complete microprocessor-compatible analog I/O systems as thick-film hybrids in IC-compatible packages. *May 26, p. 106*
- June 1977**
- Xerox Corp. introduces the 9700 electrophotographic nonimpact printing system, which runs at 21,000 lines per minute. *June 9, p. 26*
 - Researchers at Japan's Cooperative Laboratory develop an electron-beam lithography system that completes a pattern directly on a wafer in half the time taken by competitive equipment. *June 9, p. 33*
 - First 16-bit microcomputer chip, from Texas Instruments, the 9940, is industry's most powerful single-chip controller. It has 128 bytes of RAM and 2,049 bytes of ROM, can address 32 bits of I/O, and handles 16-bit words. *June 23, p. 118*
- July 1977**
- Using I²L, Analog Devices for the first time puts a self-contained microprocessor-compatible 10-bit a-d converter on a single chip. *July 7, p. 25*
 - Bell Labs scientists report on GaAs solid-state lasers with projected lifetimes of 1 million hours—100 years of operation. *July 7, p. 26*
 - Motorola's Government Electronics division introduces modules and boards that implement the NBS encryption algorithm. *July 7, p. 40*
 - Hewlett-Packard introduces first instrument using C-MOS-on-sapphire technology, the 2240A measurement and control unit. *July 7, p. 128*
 - The first digital switch, built by Stromberg-Carlson, for small central telephone offices is cut over in Georgia. *July 21, p. 25*
 - IBM develops an integrated package containing all the electro-optical elements of a fiber-optic transmitter. *July 21, p. 35*
- August 1977**
- First commercial bubble system for mini-floppy replacements in microcomputer systems is introduced by Texas Instruments. System includes 92-k memory chips and LSI peripherals for building semiconductor versions of mini-floppy disks. *Aug. 4, p. 81*
 - With thin-film hybrid technology, Datel shrinks an entire microprocessor-compatible, 16-channel, 12-bit data-acquisition system into a single IC-compatible package. *Aug. 18, p. 35*
 - Motorola wins contract to supply Ford Motor Company with a custom microcomputer for fuel and emission control on 1980 cars. *Aug. 18, p. 42*
- September 1977**
- Industry reaches the 65-k level in ROM chips as three suppliers introduce devices: American Microsystems' ROM is the first to use V-MOS technology; Mostek and National Semiconductor use silicon-gate processes. All boast access time below 300 ns. *Sept. 1, p. 26*
 - From National Semiconductor comes the industry's first monolithic data-acquisition system. The ADC 0816 has an 8-bit a-d converter, 16-channel multiplexer, input-address latches, and buffered three-state output latches. *Sept. 1, p. 34*
 - First of the sub-100-ns 4-k static memories built with Japanese-developed D-MOS technology emerges to challenge U. S. dominance in market. *Sept. 15, p. 39*
 - Philips develops resistless, additive pc process for fine-line printed wiring. *Sept. 15, p. 42*

SABRE VII

makes no compromise with quality and performance... Why should you?

No other IRIG tape recorder/reproducer gives you all these capabilities. System prices from less than \$15,000.

- Two electrically switchable tape speed ranges from 120 to 1 1/2 ips or 60 to 15/16 ips
- Direct bandwidths to 2 MHz
- FM bandwidth from DC to 500 kHz
- 10 1/2, 14 and 15-inch reels with 38.4 hours of record time
- IRIG PCM to 600 kb/s serial rate
- HDR to 4 Mb/s serial rate
- 7, 14 or 16 channel capacity
- Low flutter/TBE
- Self-contained power supply
- Both tape shuttle and loop operation available

Now have the full-capability performance you need at the lowest price. All it takes is SABRE VII, the all-band portable recorder/reproducer that handles either 1/2-inch or 1-inch tape . . . records and reproduces Direct, FM, PCM and either serial or parallel high density PCM. Easily switches between IRIG, FM bands by means of a single switch. For even more versatility, you get two bi-directional speed ranges, plus automatically-switched reproduce electronics for up to 7 tape speeds. *You get it all, and SABRE VII actually costs less than comparable systems.*

Amazing? Yes, and because of the same superior engineering, SABRE VII also controls tape speed accuracy to within $\pm 0.10\%$ and extends tape and head life through enhanced tape handling. Options include FM calibrator, remote control, voice, IRIG tape servo, rack mount kit, shuttle, sequential record and/or reproduce and anti-vibration mounts. **SABRE VII doesn't compromise with quality and performance. Why should you!**

For complete details, write or call:

Sangamo Weston, Inc.
Data Recorder Division
P.O. Box 3347
Springfield, IL 62714
TEL: (217) 544-6411

SANGAMO WESTON
Schlumberger



Circle 152 on reader service card

Board has analog and digital outputs

Interface card for SBC-80-type systems provides four digital outputs and choice of two or four analog outputs for minimum system cost

by Mike Riezenman, New Products Editor

One of the ways in which money is sometimes wasted in computer-controlled systems is in the use of expensive digital-to-analog converters to perform simple digital tasks like actuating relays or turning on indicator lamps. The problem has been that, until now, output boards for most microcomputers have provided either all analog or all digital outputs, but not both. If you needed lots of each kind, this was fine. But the small-system designer who needed two or three digital outputs and one or two analog outputs had to buy an analog board and use a few of its high-resolution d-a converters as simple logic drivers.

For users of Intel SBC-80 series single-board microcomputers, the RTI-1201 real-time interface board solves this problem by providing a mixture of outputs on a single card. Furthermore, most of its more costly features are offered as options, so

the user can carefully select only those that he really needs.

Basically the board is an eight-channel unit with four software-controlled logic drivers and either two or four 12-bit d-a converters. If desired, the converters can be provided with voltage-to-current converters that produce 4-to-20-milliampere current-loop outputs.

The four digital logic drivers are open-collector outputs rated for 30-volt operation and each is capable of sinking a continuous current of 300 milliamperes. The analog outputs have five ranges that can be selected by the user by means of wire-wrapable jumpers: 0 to 5 v, 0 to 10 v, ± 2.5 v, ± 5 v, and ± 10 v.

Easy to use. The RTI-1201 has many features and capabilities that reduce the effort required to interface a microcomputer with the real world. Among the features included are d-a converter readback, memory

mapping, and card selection.

D-a converter readback, which is simply the capability for reading back the converter's input data, can be an important convenience since it eliminates the need for scratchpad memory or software overhead to store data written into the converters. Any time the data is needed it is available at the converters.


Memory mapping allows the RTI-1201 to interface with the microcomputer as a 1,024-byte block of memory. This lets the system designer take advantage of all of the 8080 memory reference instructions.

The card-select capability allows as many as 16 RTI-1201s to share the same block of memory locations. Analogous in some ways to memory paging, this feature is particularly useful when it is desirable to use the same subroutines with more than one RTI-1201.

Power. The RTI-1201 must be powered by a ± 15 -v source. If none is available, a dc-to-dc converter can be provided to allow the board to run off the microcomputer's 5-v supply. In small quantities, the converter adds \$75 to the price of the board.


Without the dc-to-dc converter, in quantities of one to nine, prices for the RTI-1201 range from \$298 for the basic four-driver, two-converter configuration to \$579 for a board with four drivers, four d-a converters, and four voltage-to-current converters. Other standard configurations include four drivers, two d-a converters, and two v-i converters for \$398 and four drivers and four d-a converters for \$379.

Analog Devices Inc., P. O. Box 280, Norwood, Mass. 02062. Phone Fred Pouliot at (617) 329-4700 [338]

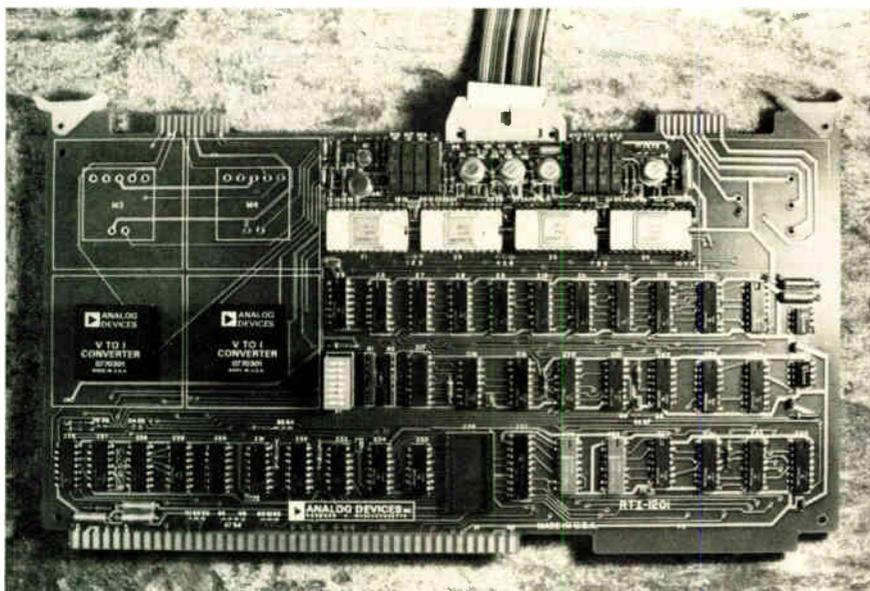

RF Power Amplifiers?

One unit may be all you'll ever need.

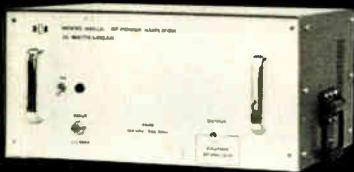

If you have the ENI Model 440LA ultra-wideband solid state power amplifier, all you need is a laboratory signal generator and you've got the ultimate in linear power for such applications as RFI/EMI testing, NMR/ENDOR, RF transmission, ultrasonics and more.

Capable of supplying more than 40 watts of RF power into any load impedance, the 440LA covers the frequency range of 150 kHz to 300 MHz.

We could mention unconditional stability, instantaneous failsafe provisions and absolute protection from overloads and transients, but that's what you expect from any ENI power amplifier, and the 440LA is no exception!

Our catalog contains complete specifications on the 440LA as well as the entire line of ENI amplifiers, and is available without obligation, of course.

For further information or a demonstration, contact ENI, 3000 Winton Road South, Rochester, New York 14623. Call 716-473-6900, or Telex 97-8283 ENI ROC.

ENI

The World's Leader
in Power Amplifiers

New products

Semiconductors

Rectifiers have linear drops

10-ampere ion-implanted diodes have reverse-recovery times of 50 nanoseconds

Designed for multiple-output switching power supplies, two 10-ampere rectifiers offer linear forward-voltage-drop characteristics that, in some cases, eliminate the requirement for regulating circuits. In fact, Solid State Devices Inc., manufacturer of the rectifiers, guarantees these forward-voltage drops throughout the 1-to-10-ampere operating range of the rectifiers.


Compared with Schottky diodes for the same switching-power-supply applications, the SER 1061 and SER 1061S are "lower-priced and more stable linear performers," claims Arnold Applebaum, president of Solid State Devices. Priced at less than \$2 in large quantities, the

rectifiers simplify power-supply circuitry, according to Applebaum.

Maximum instantaneous forward-voltage drop at 10-A forward current is 0.907 volt, and these forward drops are guaranteed: a difference of 0.25 v is specified between 1 A and 5 A, 0.10 v between 5 A and 10 A. These linear characteristics are often within the overall specifications of common power supplies, he notes, especially when full-wave bridges are used. For more accurate supplies, regulating circuits are dictated, primarily because of copper losses.

The devices offer a 50-nanosecond reverse-recovery time when measured from a 0.5-A forward current, traversing to -1 A and recovery to 0.1 A. Maximum full-cycle average reverse current is 2 mA at 100°C. No derating is required for reverse leakage up to 80% peak-inverse voltage at 150°C, and the operating range is -65° to 200°C. Peak repetitive reverse voltage is 50 v while rms reverse voltage is 35 v. Peak repetitive forward current is 40 A and peak surge current is 200 A, both at 100°C.

The key to attaining precise

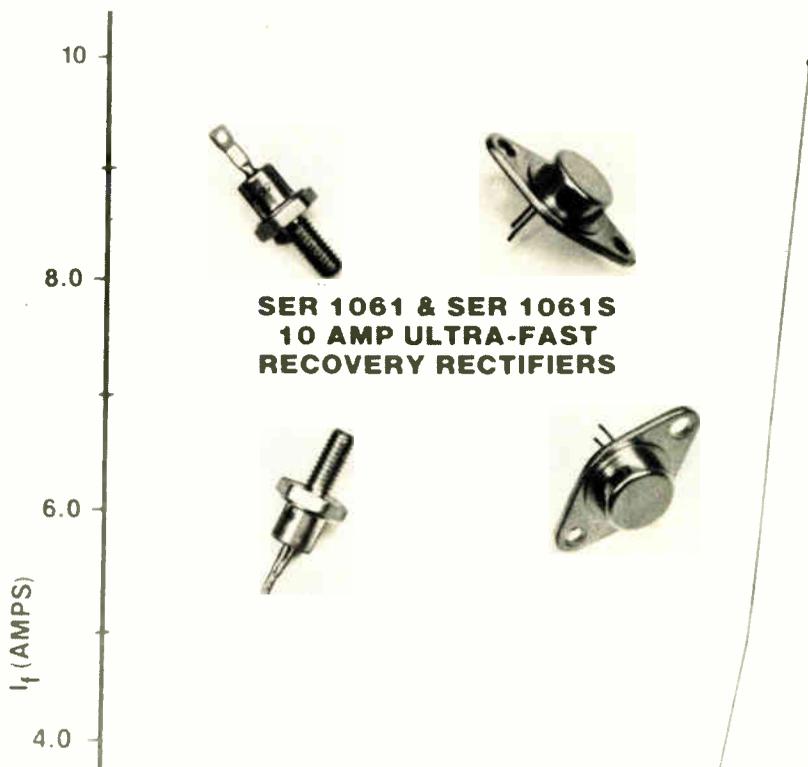

Rent the Tek 8002 Microprocessor Lab today.

And get Leasametric's total support package.

The System

The new Tektronix 8002 Microprocessor Lab is the most advanced microprocessor development system available today. Each system is delivered complete with software support for two microprocessors plus hardware support for one microprocessor—all of your choice.

With the real-time prototype analyzer (including its 8-channel external ability), CRT console and 180 CPS line printer, your design team will enjoy the most productive design tool in existence.

In addition, the 8002's universality enables it to support several microprocessors—the 8080, 6800, Z-80 and 9900 with more to follow—thus freeing the designer to select a microprocessor solely on the basis of capability and cost-effectiveness.

The Training

With the advent of the microprocessor, your design team now faces a new kind of development process, a process which brings with it an unprecedented opportunity for design flexibility. It also brings a process where proper training on the equipment and hardware/software integration techniques are of vital importance.

As part of Leasametric's total support package, we offer you **Tektronix-qualified** training, consisting of two full days of specialized on-site sessions for up to three members of your design team. There's no need to send your designers across the country to attend costly and time-consuming seminars. Upon completion of the training, you get immediate design productivity since your design team can now concentrate on the design task at hand and not on system operation.

The Service

In the unlikely event that repairs should be necessary on the development system, Leasametric will initiate either in-house service or a replacement system within 24 hours—at no additional cost.

Leasametric will also make available a special hot line telephone number to assist you in solving any operational problems.

Our 18 fully-stocked Inventory Centers across the U.S. and Canada will provide on-going technical assistance and dedicated service whenever needed.

Call your nearest Leasametric Rental Inventory Center listed below for immediate shipment of the Tek 8002 or further details.



Leasametric

Division of Merric Resources Corporation
822 Airport Blvd., Burlingame, CA 94010




INVENTORY CENTERS: San Francisco, CA (415) 342-7111; Los Angeles, CA (213) 768-4200; Anaheim, CA (714) 634-9525; San Diego, CA (714) 565-7475; Houston, TX (713) 477-9911; Chicago, IL (312) 595-2700; Boston, MA (617) 244-9400; Midland Park, NJ (201) 444-0662; Long Island, NY (516) 293-5881; Washington, D.C. (301) 881-6700; Orlando, FL (305) 857-3500; Dayton, OH (513) 898-1707; Philadelphia, PA (215) 583-2000; Denver, CO (303) 429-7900; Minneapolis, MN (612) 854-3426; Dallas, TX (214) 661-9193; Atlanta, GA (404) 491-1155; Toronto, Ontario (416) 676-1897.

TOLL FREE NUMBERS: Outside California 800-227-0280; Outside New Jersey 800-631-7030; Outside Maryland 800-638-0838; Outside Illinois 800-323-2513.


HIGH & LOW

Anritsu's Spectrum Analyzer offers you high performance at low power consumption.

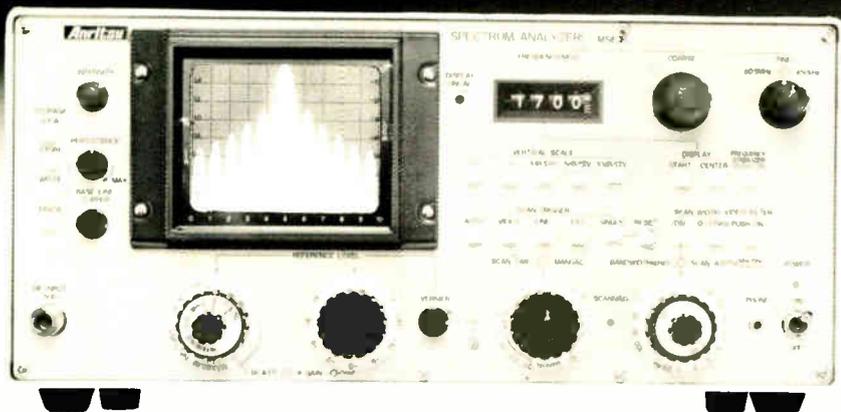

MS62B

- Only 55watts power consumption (capable of battery operation), the lowest in the world
- High sensitivity of -122dBm (MS62A/B), $-9\text{dB}\mu\text{V}$ (MS62A3/B3)
- Wide 70dB dynamic range even with -30dBm input signal
- Covers 100kHz-1700MHz frequency range
- Compact construction for space-saving installation
- Virtually maintenance-free
- CRT: Normal persistence type P7 phosphor (MS62A/A3) and half-tone storage type (MS62B/B3)
- The field strength direct reading dial is attached to the MS62A3/B3, so the field strength can be measured in conjunction with the calibrated antenna (option) by the unit of dB/m on the level reference dials of the MS62A3/B3.



The Tracking Generator MH628A is used for a wide band swept frequency measurements. Frequency range: 100kHz to 1700MHz. Output level: $-60\text{ dBm}/50\Omega$, flatness: less than 1dB from 100kHz to 1700MHz.

ANRITSU

ANRITSU ELECTRIC CO., LTD.
MEASURING INSTRUMENTS DIVISION
SALES DEPARTMENT:

12-20, Minamiazabu 4-chome, Minato-ku, Tokyo 106, JAPAN
Phone: (03) 446-1111/Telex: 0-242-2353
Cable: ANRITDENKI TOKYO

• U.S.A. TAU-TRON INC. Tel: (617) 667-3874 • West Germany Knott Elektronik GmbH Tel: (08178) 4085 • England Dymar Electronics Limited Tel: Watford 37321 • France Takelec Airtronic Tel: (1) 946-96-48 • Italy Vianello S.p.A. Tel: (02) 54 40 41 • Holland C.N. Rood B.V. Tel: 070-99 63 60 • Sweden Teleinstrument AB Tel: 08-38 03 70 • Singapore O'Connor's (Pte) Ltd. Tel: 637944 • Australia NEC Australia Pty. Ltd. Tel: Melbourne 560-5233 • Malaysia O'Connor's (Malaysia) SDN. BHD. Tel: 51563/5 • Brazil Anritsu Eletrônica Comércio Ltda. Tel: Rio 221-6086

New products

control over forward-voltage characteristics while decreasing switching time is use of the company's ion implantation process, Applebaum says. Conducted in a high-vacuum chamber using a solid ion source, the implantation technique allows accurate impurity placement 200 to 300 angstroms below the epitaxial surface with virtually no lateral migration, he says.


Electrically identical, the two rectifiers are packaged in different cases. The SER 1061 is housed in a TO-66 package while the S model comes in a D-14 stud-mounted package. In 100-unit quantities, they are priced from \$3.40 to \$4, depending upon case style and forward-voltage drop. Delivery is from stock to 30 days.

Solid State Devices Inc., 14830 Valley View Ave., La Mirada, Calif. 90630. Phone (213) 921-9660 [411]

C-MOS chip is almost a complete a-d converter

The model ADD3501 (also known as the MM74C935-1) one-chip converter device needs only an external voltage reference and a few non-precision passive components to form a complete analog-to-digital converter. Add digit drivers and a light-emitting-diode display, and the unit becomes a $3\frac{1}{2}$ -digit panel meter that will operate from a single 5-volt dc supply.

The C-MOS circuit uses an integrating pulse-modulation conversion scheme to provide high noise immunity at low cost. Maximum error is 0.05% of full scale $+0, -1$ count over the temperature range from 0° to 70°C . The ADD3501 has a multi-

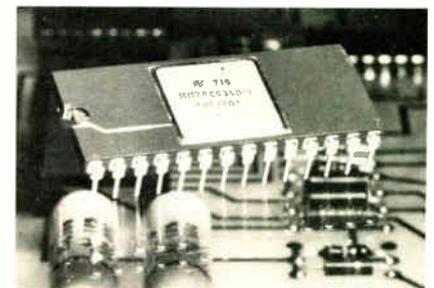

Berg Minisert Sockets display "high reliability" on Tektronix Oscilloscopes

The Berg Minisert™ is a miniature, low-profile P.C. socket which allows .400"-tight board-to-board spacing. The Minisert provides positive, functional reliability over repeated insertion/withdrawal cycling; its elastomeric seal keeps out contaminants.

Tektronix likes the repeated pluggability the Minisert socket affords in using transistors, LED's, lamps, IC's and other components. Tektronix has found it can rely on Berg Electronics . . . to supply the product and the application machines

that precisely meet its interconnection needs.

Berg is experienced. We read interconnection needs like Tektronix reads waveforms. We have the products, the background and the back-up to do the job. Your job. Let's work on it, together. Berg Electronics, Division, E. I. du Pont de Nemours & Co., New Cumberland, Pa. 17070—Phone (717) 938-6711.


 **BERG ELECTRONICS**

Circle 157 on reader service card

We serve special interests—yours!



LOW FREQUENCY QUARTZ CRYSTALS

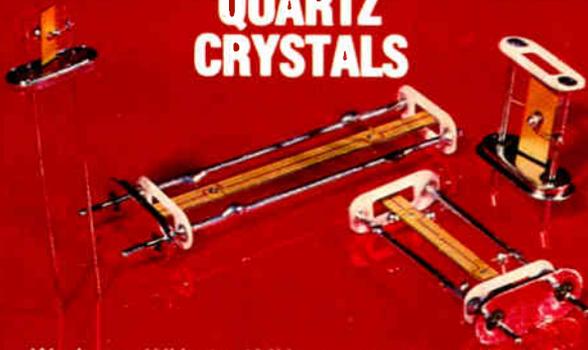


We have 1KHz to 1MHz quartz crystals for your low-frequency applications. McCoy's quartz crystals feature technology in controlling TC and motional parameters, performance with a five to six week lead time, and quality design and process controls. Our outstanding line of low-frequency quartz crystals includes: JT, NT, 5°XF, 5°X, MT, GT, BD, DT, CT, and SL.

McCoy
ELECTRONICS COMPANY
a subsidiary of OAK Industries Inc.

MT. HCLLY SPRINGS, PA 17065 • TEL.: 717-486-3411 • TWX: 510-650-3548

Circle 158 on reader service card

F.W. Bell sells more gaussmeters than all other manufacturers combined! Why?



If magnetics is your field, consult with Bell, the gaussmeter people. They can match a unit to your specific application.

Request further information today

It could be because the Bell line includes a gaussmeter for every application.

It could be because Bell's price is highly competitive and Bell units offer more features dollar-for-dollar.

It could be all these reasons, plus Bell's intrinsic quality and design integrity.

Fw
A Subsidiary of
The Arnold Engineering Company

BELL INC.
4949 Freeway Drive East
Columbus, Ohio 43229
Phone: (614) 888-7501
TWX 810-337-2851

New products

plexed seven-segment output capable of delivering 40 milliamperes of peak output current per segment. Other features include automatic polarity detection and indication, overflow indication including polarity, and a maximum reading rate of 10 conversions per second. The converter is housed in a 28-pin dual in-line package and has a 100-piece price of \$9.95 (plastic package) or \$10.95 (ceramic package).

National Semiconductor Corp., 2900 Semiconductor Dr., Santa Clara, Calif. 95051. Phone Jerry Zis at (408) 737-5225 [414]

Replacement op amp needs no compensating capacitor


Designed as a replacement for the popular LM108/308 operational amplifiers, the OP-12 is an internally compensated unit that replaces both the op amp and an external 30-picofarad capacitor. Since elimination of this capacitor is particularly important in hybrid-circuit applications, the OP-12 is offered in both packaged and chip forms. A companion unit, the OP-08, is similar to the OP-12 except that it requires external compensation.

Key specifications of the top-of-the-line OP-12AJ and OP-08AJ include a maximum room-temperature input offset voltage of 150 microvolts, a maximum worst-temperature input offset voltage of 350 μV , a maximum offset-voltage temperature coefficient of 2.5 $\mu\text{V}/^\circ\text{C}$, and a minimum open-loop gain of 40,000 at a load resistance of 5 kilohms. These units operate from -55°C to 125°C and sell for \$20 each in hundreds. Op amps that have relaxed specifications over the same temperature range go for as little as \$6.50 each, while units that operate from 0° to 70°C range from \$6 each to as little as \$2.50 in the same 100-to-999 quantities.

Uncased chips, which are available only from the factory, have hundred-piece prices from \$1.50 to \$6.70 each.

Precision Monolithics Inc., 1500 Space Park Dr., Santa Clara, Calif. 95050. Phone Donn

P/rel™ Bio-Mechanical Interface to the Digital World

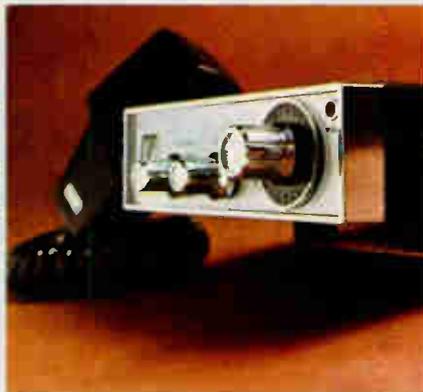

P/Rel . . . Standard Grigsby's programmable rotary encoded logic switch or control is fully programmable to any code.

When you need design flexibility, Standard Grigsby's P/Rel will do the job. No other programmable rotary switch offers the design engineer as much versatility, with as low a cost, as the P/Rel switch.

You can use the P/Rel as a detented switch for feeding encoded information direct to your digital logic circuit. Or, use it without a detent, as a "digital pot," and eliminate the cost of expensive A-D conversion.

Find out how your product can use the standard or miniature P/Rel. Send for Free literature.




standard grigsby, inc.

920 Rathbone Avenue, Aurora, Il. 60507
Phone: (312) 844-4300

IN EUROPE: W. Gunther GMBH, Virnsberger Strasse 51,
D 85 Nurnberg 1, West Germany Phone: 0911/65521

Circle 159 on reader service card

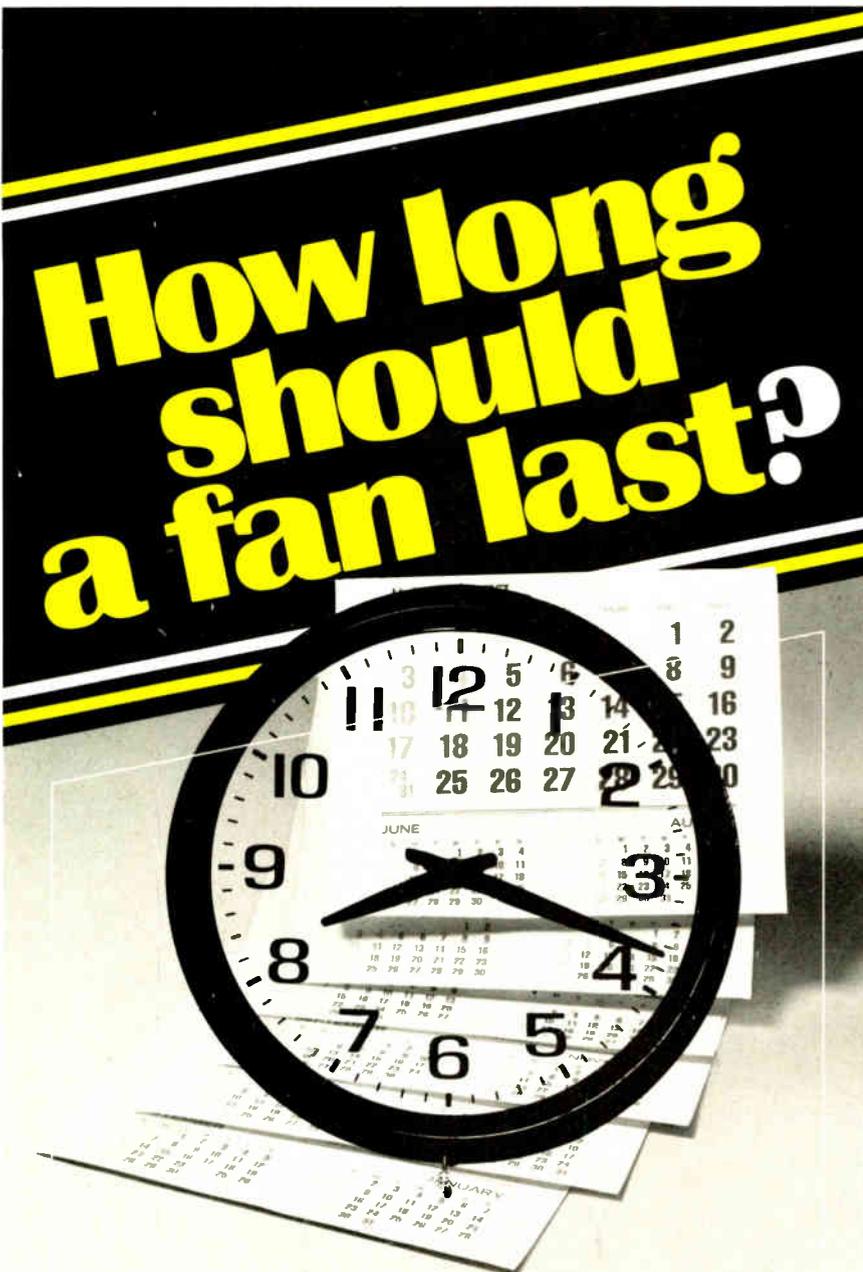

How long should a fan last?
Four hundred hours? Six months? Six years? As long, Rotron says, as the equipment it was designed to serve.

That means one installation cost instead of many. Minimum extra parts inventory. Reduced possibility of installation mishaps, less reliance on widely dispersed and less skilled personnel. It means less cost over the entire life cycle.

It means more rugged, more reliable airmovers, greater dependability for the equipment involved.

See why Rotron—with a long history of designing and building precision airmovers for the most demanding needs—welcomes the test of life cycle costing. Call or write for our new Custom Division Catalog.



ROTRON INC.
AN EG&G COMPANY

Woodstock N.Y. 12498 914 • 679-2401 TWX 510-247-9033
 Garden Grove, Cal. 92641 • 714-898-5649 • Rotron B.V. Breda, Netherlands Te. (076) 879311 Telex NL 54074

New products

Soderquist at (408) 246-9222, Ext. 183. For information on the packaged devices, circle reader service number 415; for the chips, circle number 416.


8,192-bit PROM runs fast and cool

An 8,1092-bit field-programmable read-only memory from Fujitsu combines high speed with low power consumption. The MB 7055/7060 PROM has a maximum chip-enable time of 150 nanoseconds (60 ns typical) and a maximum access time of 250 ns (150 ns typical). It uses a single 5-volt power supply from which it draws only 0.04 milliwatt per bit for a total power consumption of less than 330 mw. The three-state 7055 and the open-collector 7060 are available immediately in sample quantities. Volume deliveries are scheduled for the end of the year. Fujitsu America Ltd., 2945 Oakmead Village Court, Santa Clara, Calif. 95051. Phone Bob Freischlag at (408) 985-2300 [413]

Monolithic filter offers voltage control

The model SSM 2040 voltage-controlled filter is a monolithic four-section device that can be used to synthesize almost any type of active filter—low-pass, high-pass, band-pass, notch and all-pass. The unit operates in the audio range and is primarily intended for use in electronic musical instruments. Samples are available at \$10 each.

Solid State Music, 2102A Walsh Ave., Santa Clara, Calif. 95050. Phone John Burgoon at (408) 246-2707 [418]

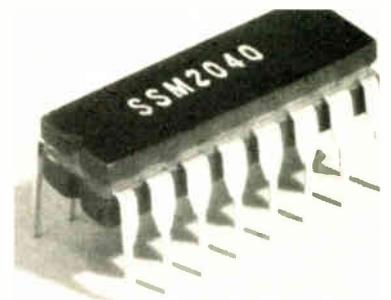

“Until now, we’d been mistaking access to processing for access to answers.”

Problem: It takes more than a desktop processor to organize output into its simplest, most usable form.

A personal computer can shave timeshare expenses, but do nothing about trimming the fat off alphanumeric answers. You can give up the power of a mainframe without the promise of more intelligent, instantly visible data.

Solution: Tektronix’ 4051 Graphic System. The one desktop unit that shapes information into usable graphics.



From interfaces and firmware to hard copy units, data storage devices, printers, plotters, graphic tablets and proven software, Tektronix provides plug-in capability to customize the 4051 to your special needs.

A graphics answer is the most concise of all possible solutions. The 4051 can eliminate the hand-plotting and mental gymnastics that users of alphanumeric-only systems take for granted. It lets you instantly unscramble data and interactively experiment with graphs, charts, maps and models. With exceptional simplicity. With almost the speed of thought.

You command up to 32K of off-line processing power. With a graphically beefed-up BASIC language. With complete editing and versatile graphic-oriented software.



You can tackle big programs on-line in any language,

store data on built-in mag tape, and generate graphic reports — all at your own pace.

The 4051: Its Graphics keep working when other systems quit. Yet it can pay for itself in less than a year in timeshare savings alone. Call your local Tektronix Sales Engineer, or write:

Tektronix, Inc.
Information Display Group
P.O. Box 500
Beaverton, OR 97077
Tektronix Datatek N.V.
P.O. Box 159
Badhoevedorp, The Netherlands

Get the picture. Get straight to the point.

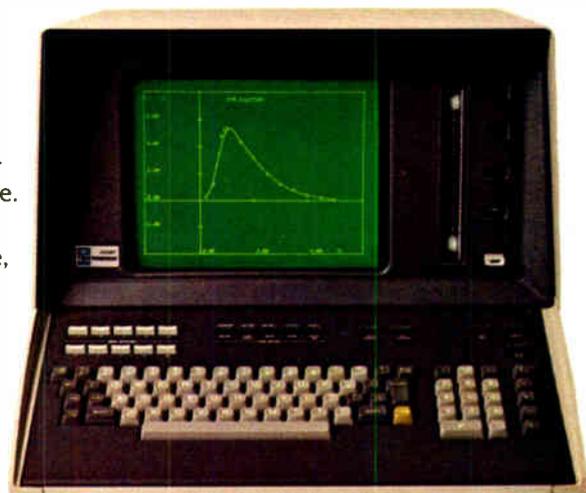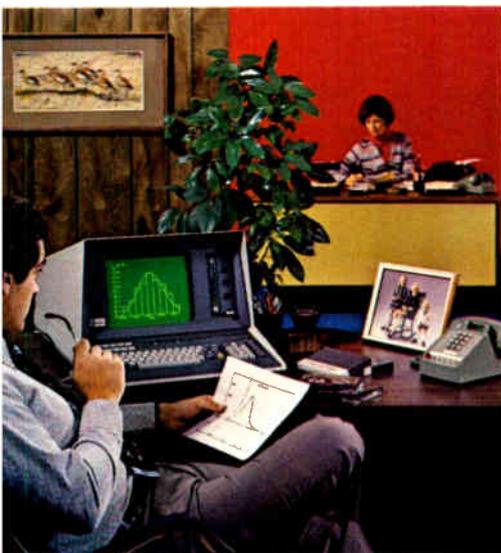


Tektronix
COMMITTED TO EXCELLENCE

Circle 161 on reader service card

OEM prices available
Copyright © 1977, Tektronix
All rights reserved

World Radio History

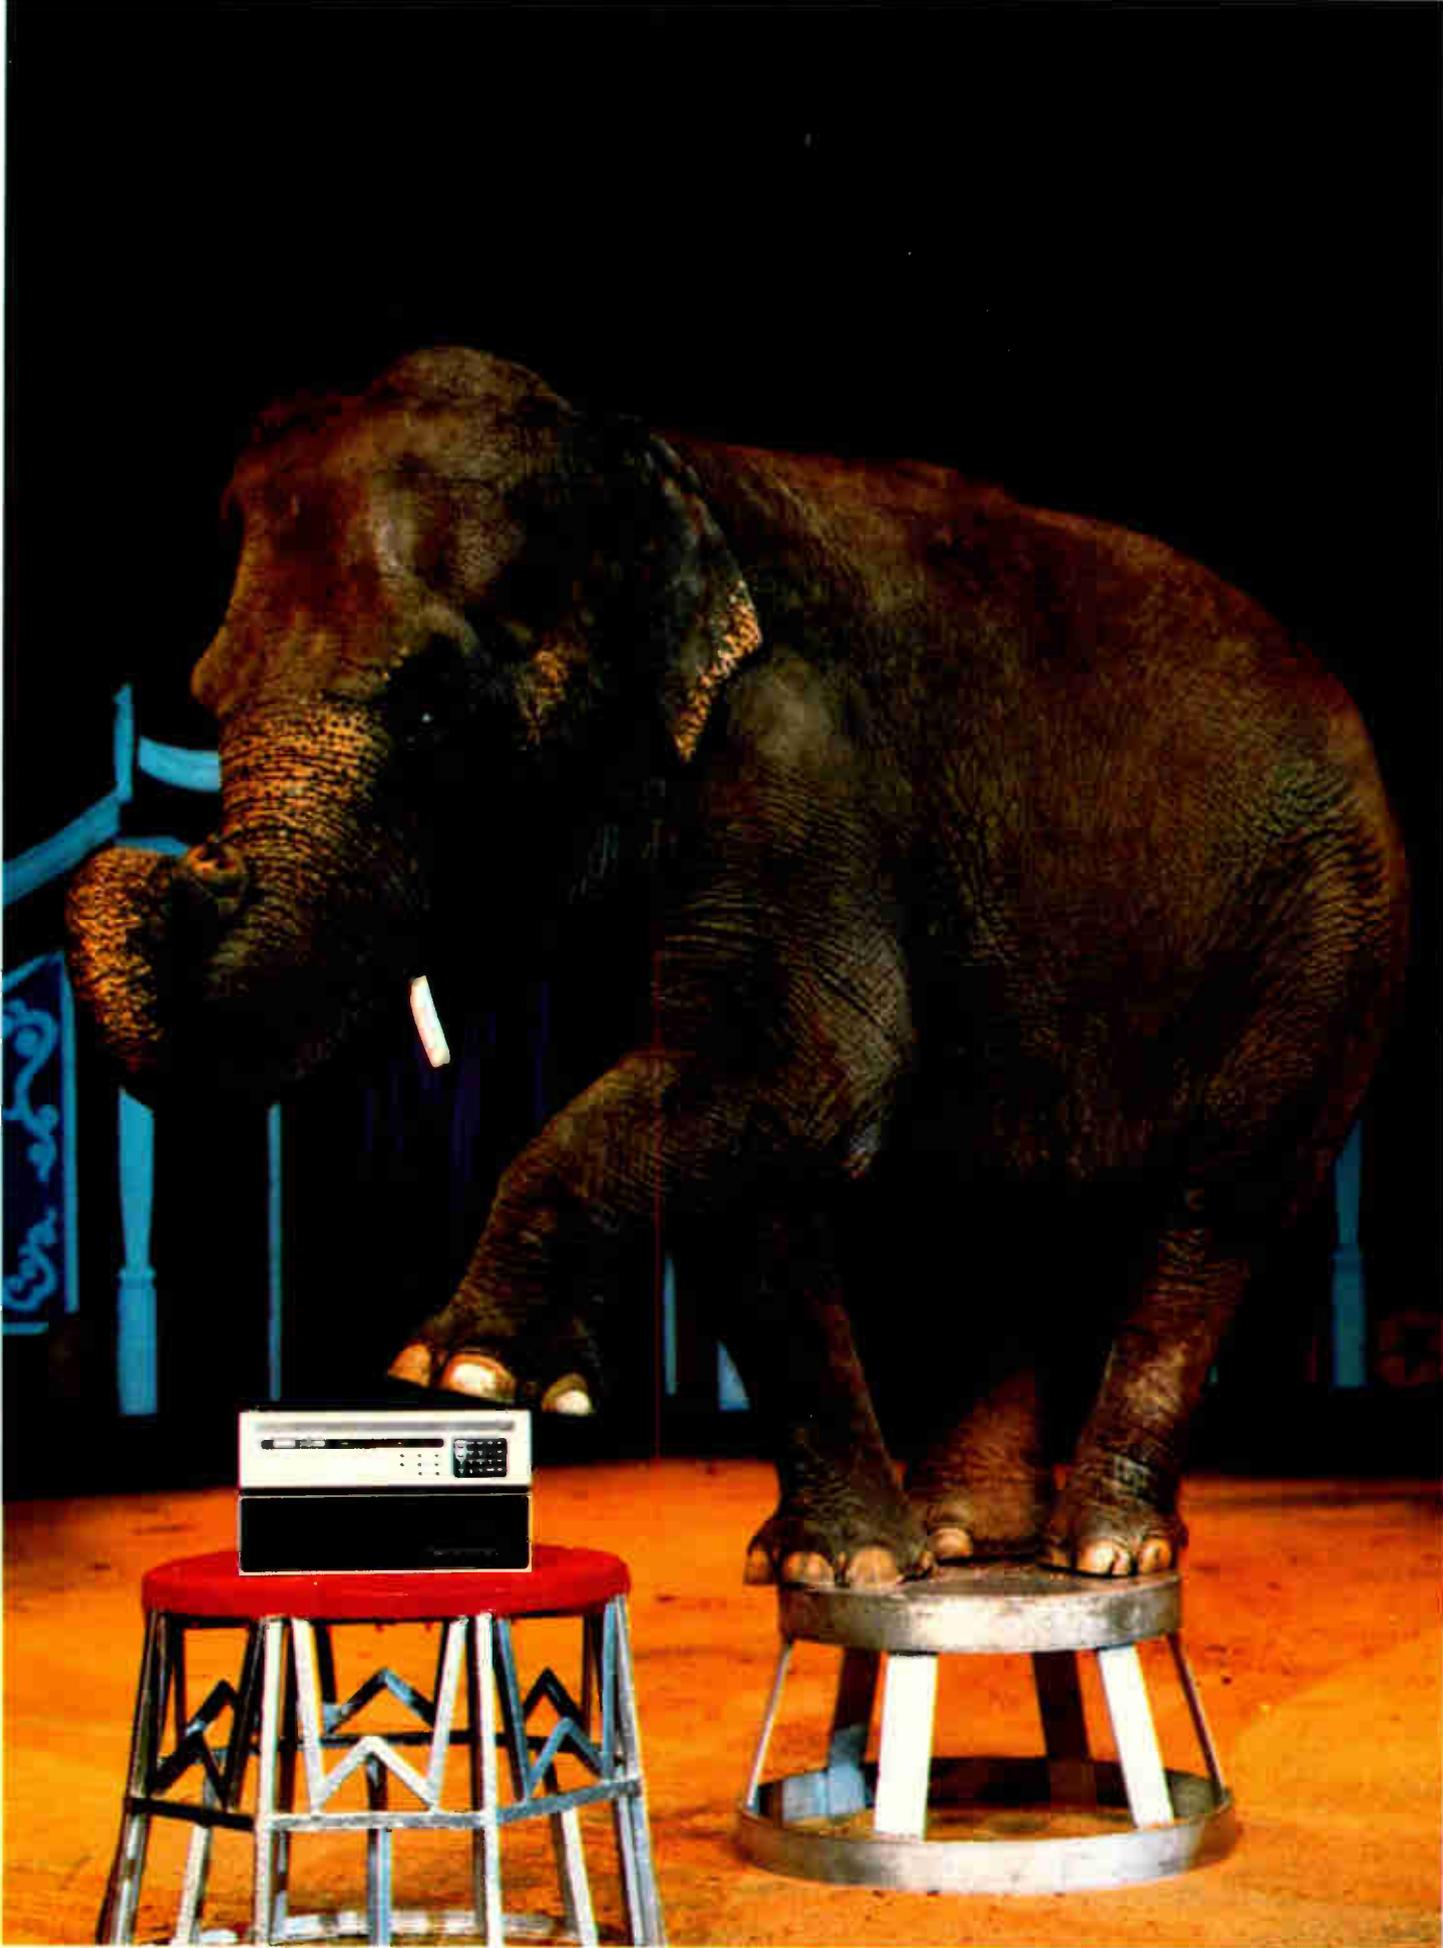

Digital announces a PDP-8 with an enormous memory.

Something big has just happened to the world's most famous small computer. In fact, something enormous.

Digital has just put 128K of memory into the PDP-8.

This act is brought to you by a powerful new memory management option called KT8-A. And by two new MOS memory modules that fit large amounts of memory into small amounts of space. Simply by adding these 16K or 32K modules in whatever combination you choose, you now expand your PDP-8/A into something bigger. What's even better, you can mix MOS and core. And that means you can protect your program in non-volatile core while you expand your data base in MOS.

And thanks to the KT8-A all this memory is under new management. Not only does the KT8-A let you address up to 128K words of memory, but it also offers you memory relocation and memory protection, while asking little in operating system overhead so you get faster system performance.

What's the cost of these enormous advancements? That's the next attraction.

The new PDP-8A MOS memory models are available at prices that are as crowd pleasing as their performance. Three models to choose from — the

8A205 with 16K, the 8A425 with 64K and the top of the line 8A625 with 128K.

They're the new big-memory Eights from Digital. Step right up.

Large memories aren't our only new trick.

New hardware and software improvements are also in the PDP-8 spotlight.

The VK8-A is a new low cost PDP-8A option that provides high quality video output plus keyboard and printer interfaces. Video character generation uses a super-sharp 9x9 dot matrix for high resolution on single or multiple CRT monitors up to one thousand feet away.

Also new for PDP-8 users is MACREL/LINKER — a sophisticated assembler with MACRO facilities that lets you implement, expand and update your system faster while reducing software development time.

And last but not least there's DECNET 8 — a series of software protocols that let you

form your own PDP-8 network.

The PDP-8. Bigger. Smaller. And better than ever.

A short while ago, we made big news with DECstation 78. A low-end system that set new highs for ease of use and simplicity.

Now we're expanding the PDP-8 family up, as well as down, and that means new opportunities for OEMs and end-users alike. Look into what's happening with PDP-8s. Call your nearest Digital sales office today.

Or send the coupon to PDP-8 Marketing Communications, Digital Equipment Corporation, 129 Parker Street, PK3-1/M34, Maynard, Massachusetts 01754. European headquarters: 12, av. des Morgines, 1213 Petit-Lancy/Geneva. In Canada: Digital Equipment of Canada, Ltd.

digital

PDP-8 Marketing Communications
Digital Equipment Corporation, 129 Parker Street, PK3-1/M34,
Maynard, MA 01754
Please send additional information about the PDP-8 family.

Name _____ Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone _____ OEM _____ End-User _____

Application _____

E10277

Circle 163 on reader service card

WAFERTRAC. STILL STEAMING AHEAD!

Since GCA introduced the revolutionary WAFERTRAC™ a few months ago—the completely automatic, microprocessor-controlled wafer processing system, 9 out of 10 of the world's largest manufacturers of semiconductors have purchased their WAFERTRAC systems. Why?

WAFERTRAC provides higher yields in less facility space.

WAFERTRAC improves up-time and reliability to higher levels than ever before possible.

WAFERTRAC eliminates traditional 25-wafer group processing limits.

WAFERTRAC lets you design your own specific configuration, according to your firm's unique requirements.

WAFERTRAC.
The first practical application of the microprocessor to semiconductor processing, requiring only a single person in your processing loop ...and *then* only to load and unload carriers.

Don't be the last to get on board. WAFERTRAC's still steaming ahead... destination: greater profits!



GCA/SUNNYVALE DIVISION ●●▲

PART OF THE GCA/IC SYSTEMS GROUP
1050 Kifer Road, Sunnyvale, Calif. 94068 TWX: 910-339-9211 (408) 732-5330

New products

Data Handling

Graphics board is versatile

Changing the plug-in memories on this peripheral changes its resolution

The MTX-512 family of one-card graphics controllers comprises units that can be easily programmed to provide dot matrixes with four different resolutions: 256-by-256, 256-by-512, 512-by-512, and 256-by-1,024 points. The last extends nearly to the limit of television scan monitors.

Designed to exploit the interchangeability of 16-pin dynamic random-access memories of different capacities, the controllers are basically interface devices between minicomputers or microcomputers and TV monitors. By loading them with the right size RAMS (4,096-bit, 8,192-bit, or 16,384-bit) plus a couple of control programmable read-only memories, the manufacturer provides the user with the resolution he needs at a price that reflects the


volume production of a single standard product. The prices of the cards vary only because of differences in the prices of the RAMS that go into them.

In addition to variable resolution, controllers in the MTX-512 family offer several other important features. They can be stacked and their outputs combined to obtain color or gray-scale images. They can be synchronized to an external generator for broadcast applications. And they use a simple XY addressing scheme to minimize the address space in the host computer dedicated to the graphics function.


Simple, yet powerful, the addressing scheme handles each dot individually. Two directly addressable registers are incorporated for selecting a given dot. This allows two computer memory locations to address up to 262,000 bits of refresh memory. The entire refresh memory can be erased at once, if desired. And the host computer can read its contents at any time.

The first two cards in the MTX-512 family are designed for Digital Equipment Corp.'s PDP-11 Unibus and LSI-11 bus structures. Both buses use the powerful 16-bit PDP-11 instruction set. This eases operator manipulation of the high-resolution display.

The cards are supplied with

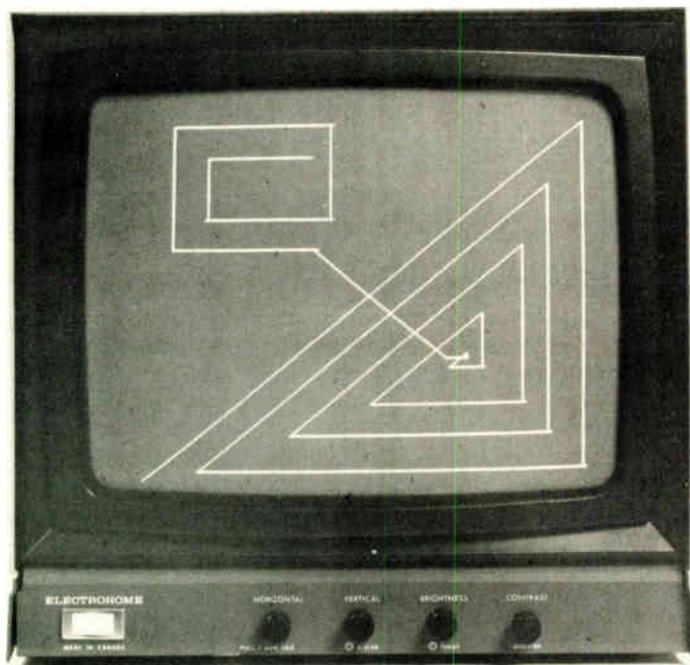

Grayhill coded output switch modules stack up!

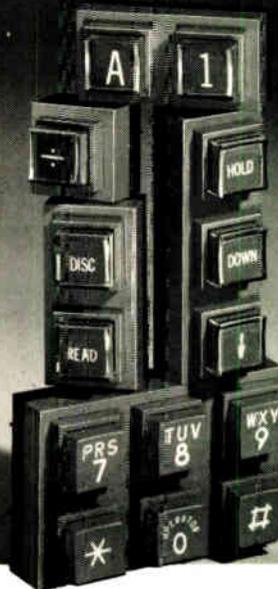

new performance standards...

1,500,000 cycles

with less than

10 milliseconds bounce

- Self-generated logic...7 wire coding capability
- Can be stacked in any array
- Telephone array will provide standard frequency selection


This "second generation" of low-profile Grayhill pc mountable push-button switch modules passes exacting test for life and for bounce. Choose 6-, 3-, 2- and 1-button horizontal or vertical modules, to array in any format, including telephone key set, while maintaining constant center-to-center spacing! Circuitry available as SPST through 4 PST, normally open, or the poles can be internally shorted so several terminals connect when button is actuated. Choice of colors, with hot stamped or molded-in legends. For more information on these Series 82 modules, consult EEM or ask Grayhill for engineering data.

Grayhill
INC.

561 Hillgrove Avenue • LaGrange, Illinois 60525
(312) 354-1040

SHORT SHORTS


New reinforced Cho-Therm-R is the tough, conformable, greaseless way to marry power devices to heat sinks.

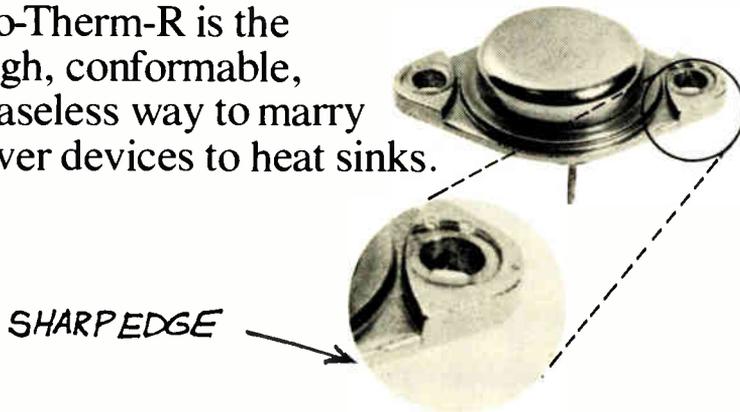

Cho-Therm-R virtually eliminates the shorting caused when sharp edges slice through less tough materials.

3 new grades match the price/performance specs of mica, polyimides and BeO plus end your grease caused assembly and QC problems.

Write or call for complete details.

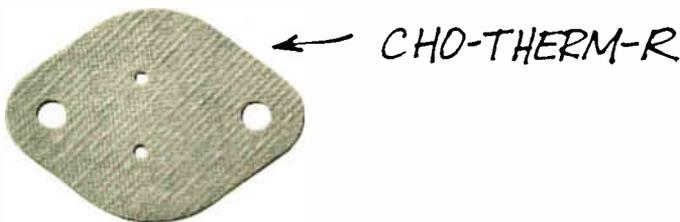

CHOMERICS

77 Dragon Court
Woburn, MA 01801
(617) 935-4850


New products

enough information for the user to adapt them for use with other computers using a standard 16-bit parallel input/output port. Initial prices for the cards are as follows: \$895 for the 256 by 256; \$1,095 for the 256 by 512; \$1,390 for the remaining two.

Matrox Electronic Systems, P.O. Box 56, Ahuntsic Str., Montreal, Que. H3L 3N5, Canada. Phone (514) 481-6838 [361]

Dot-matrix impact printer sells for \$745

Priced at only \$745 in singles, a dot-matrix impact printer for both mini-computer and microcomputer systems is capable of banging out up to 120 characters per second with up to 132 characters per line. The unit is a complete system, ready to plug in and operate. It features an RS-232

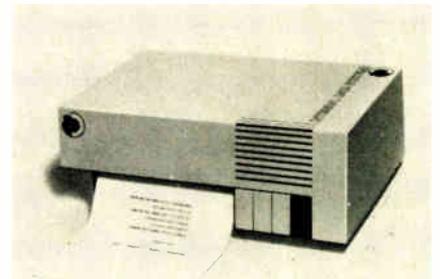


and current-loop serial interface, enhanced-mode (double-width) characters, and selectable line and character sizes.

Integral Data Systems Inc., 5 Bridge St., Watertown, Mass. 02172. Phone (617) 926-1011 [365]

Core memories fit DEC minicomputers

Three models of the ARM-1170 core memory are totally transparent alternatives to, or replacements for, the MJII and MKII memories used in the PDP-11/70 computers made by Digital Equipment Corp. According to the manufacturer, their adoption can about halve the cost of an

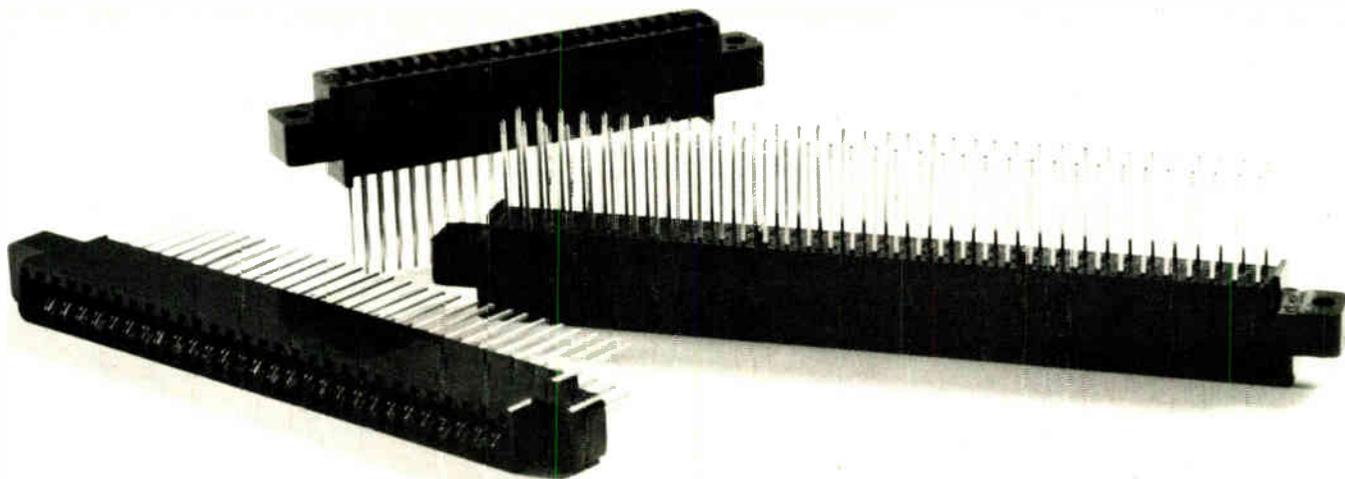

Presenting our better-mouse-trap line. No frills at all.

When you cut price without cutting quality, soon no one thinks of it as a cut price. That's where our Norsman line of Wire-Wrap* P/C connectors is headed. Here's why:

The insulator — it's tough, resilient, non-conductive — everything you need in a Wire-Wrap body. And it's made out of low cost phenolic, not the higher cost diallyl phthalate (if you need to meet mil specs, we have that in one of our other lines).

Contacts are semi-bellows and gold-plated — but

plated with our unique AuTac (TM) process. You get .000050" gold plate all along the mating surfaces for a sure, gouge-proof, pop-off-proof contact — but that's it. No wasted gold.

And you can find the size you need — Norsman is a full line from 15/30 to 50/100 contacts, in either .100 or .125 contact centers.

The whole Norsman idea is as simple as it is old: keep performance up and cost down. It works.

Send for details. We haven't told you everything.

*Wire-Wrap — registered trademark of Gardner-Denver Company.

Tell me everything. Send me detailed literature.

Name

Title

Company

Telephone

Address

City

State

Zip

 **Viking**
CONNECTORS

Viking Industries, Inc./21001 Nordhoff St./Chatsworth, Calif. 91311/(213) 341-4330


+1 1.008 mV 240.5 ACV
 198.4 PSI 139.45 GPM
 -180.0 °C +1084.5 °F
 1.386 AMPS 2570.85 RPM
 220.0 OZ/SEC 1303 LBS

United Systems' Indicators Will:

- MEASURE voltage and current; ac, true rms or dc.
- CONVERT the output of any transducer/transmitter to display in engineering units.
- DISPLAY temperature (C or F) directly from thermocouple, RTD, or thermistor sensors.
- INTERFACE readily into your system by optional "single line enable" parallel BCD output.
- INDICATE when a predetermined limit is exceeded, through relay closure or logic level output from optional internal comparator alarm.

And with United Systems' exclusive adaptors these indicators change, in the field, to perform any measurement listed above and more!

For additional information contact your United Systems Representative or call the factory (513) 254-6251.

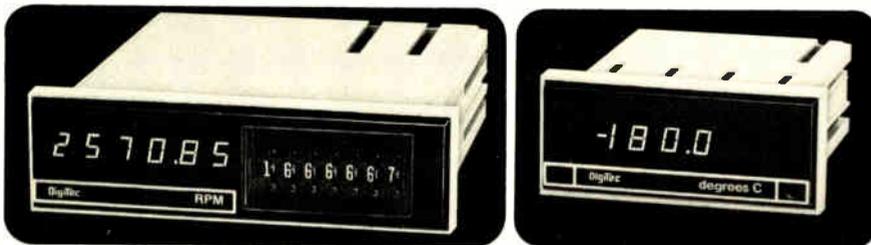

Digitec. UNITED SYSTEMS CORPORATION

918 Woodley Road Dayton Ohio 45403
(513) 254-6251 TWX (810) 459-1728

United Systems Corp: Precision measurements to count on


LHC "Information only" circle 145

RHC "Demonstration only" circle 168

168

World Radio History

New products

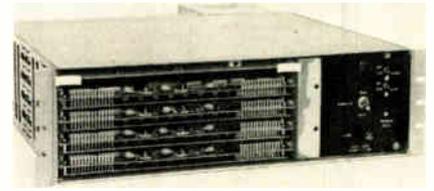

equivalent amount of DEC memory. The units are available in increments of 65,536 16-bit words up to a maximum of 2,048 kilowords. Two- and four-way interleaving are possible for enhanced throughput. With four-way interleaving, the effective cycle time is 345 nanoseconds.


Prices vary with model and capacity: the Mod A sells for \$43,205 with 512 kilowords, the Mod B is priced at \$12,875 for 128 kilowords, and the Mod C gives 256 kilowords for \$23,865. All three units are available for immediate delivery.

Ampex Corp., 200 N. Nash St., El Segundo, Calif. 90245. Phone Clyde Cornwell at (213) 640-0150 [364]

Static-RAM system can be organized in many ways

The in-7000 static semiconductor memory system offers users a wide range of memory capacities and organizations. It can provide word sizes from 6 to 96 bits and capacities of 16 to 256 kilowords. The system uses a single 5-volt dc power supply and can be furnished as either a board or as a chassis.

The basic board has a capacity of 16,384 words of up to 24 bits and,

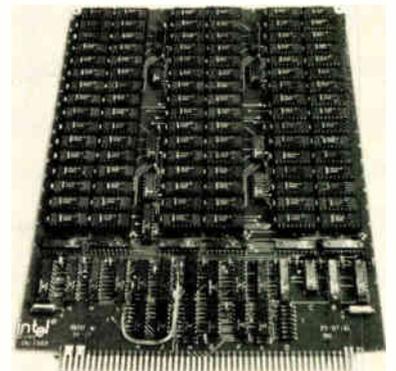

Have it your way.

Bit by bit our Standard Modular Memory lets you make every word count.

The Standard.

768K x 16 in one 5¼ x 19 inch chassis.

Need more?

You can address up to *eight* of our MSC 2601 Standard Modular Memory units for up to 6144K x 16.

Want it your way?

Our field-proven MSC 2601 uses dynamic 16K RAM elements. You can organize each card 16K x 1 to 64K x 9. Multiple cards give you almost any word and bit size you want.

Any way you like it.

Up to 14,155,776 bits in one MSC 2601.

When you like it.

Access time up to 350 nsec. Cycle time as fast as 450 nsec.

Together in the rack.

RETMA rackmountable or freestanding. Self-contained with power supplies and forced air cooling. Battery backup available, too, for nonvolatile storage.

And for another way.

If you want 4K RAM our static or dynamic versions will let you have your way with up to 192K words.

Our way.

We use fewer components and low power for high reliability. Multiple source, full specification components tested, assembled and then systems tested under worst case operating conditions.

**The MSC 2601,
Standard Modular
Memory...**


We set the standard.



Monolithic
Systems corp


14 Inverness Drive East
Englewood, CO 80110
303/770-7400

© 1977 Monolithic Systems Corp.



MSC - 2601

**Now from Digital—
a low-cost paper tape reader.**

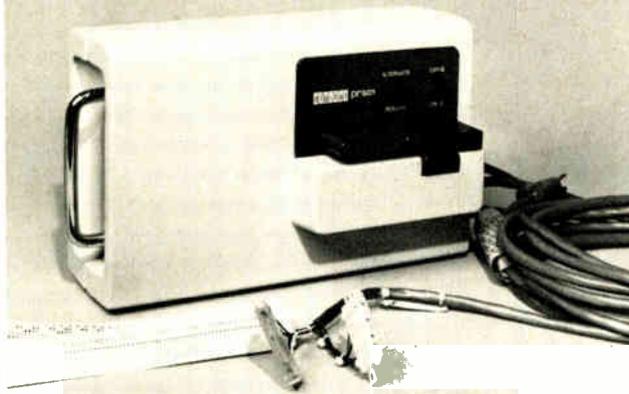


The PRSO1, Digital's new low-cost, portable paper tape reader for high performance terminals.

Now you can easily load your programs, bootstraps and diagnostics into any make or model of computer or terminal you currently own through an approved 20 mA interface. Available in 300 baud and 2400 baud versions, the small (12" x 8") and light (3kg) (6.5 lbs.) self-contained unit can go just about anywhere you need an input device. All for a mere \$750.

For complete information on the PRSO1, call your nearest Digital office; or write Digital Equipment Corporation, Traditional Products, 125 Northeastern Boulevard, Nashua, New Hampshire 03060.

digital

Circle 170 on reader service card

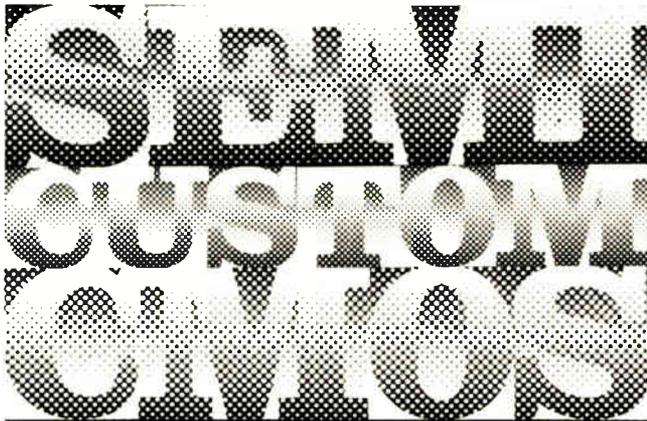

- **Fast TurnAround**
25 days from your design to prototype circuits
- **Low Cost**
Save 80% over a fully custom design
- **Reduced Circuit Size**
Multiple saving by reducing circuit size 90%
- **Proven Process**
Standard CMOS assures high reliability and dependable delivery

**INTERNATIONAL
MICROCIRCUITS, INC.**

3004 Lawrence Expwy., Santa Clara, Ca. 95050 (408) 735-9370

170

Circle 271 on reader service card

World Radio History


New products

read and write cycle times range from 250 to 500 nanoseconds. Two chassis are available. One includes a power supply and blowers and holds up to six cards. The other holds up to 33 cards and requires external power and fans. OEM prices range from 0.28 cent per bit for the cards with 24-bit words to 0.5 cent per bit for complete systems. Delivery time is 90 to 120 days.

Intel Memory Systems, 1302 N. Mathilda Ave., Sunnyvale, Calif. 94086. Phone Connie Magne at (408) 745-7120 [366]

**IBM-compatible diskette
system holds 1 megabyte**

A series of IBM-compatible mass storage systems built around the fast PerSci diskette drive is available with capacities up to 1 megabyte of formatted data. The new systems incorporate model 277 dual diskette drives and are available in a variety of configurations: one- or two-drive (two- or four-spindle) systems complete with microprocessor-based controller, power supply, and cabling enclosed in a 19-inch rack-mountable chassis; one- or two-drive systems with power supply but no

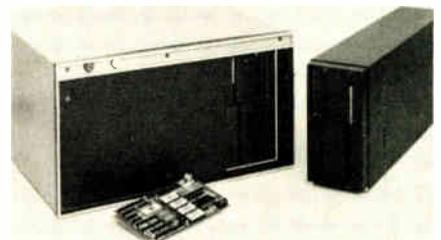


controller; and a compact, low-profile system that, when mounted vertically, measures only 4.5 inches wide and contains a single dual drive and a power supply.

Prices for the systems range from \$3,995 for the two-drive system with the controller to \$1,630 for the one-drive system without the controller.

PerSci Inc., 12210 Nebraska Ave., West Los Angeles, Calif. 90025. Phone (213) 820-3764 [363]


Overprotection can affect a CMOS switch for life.

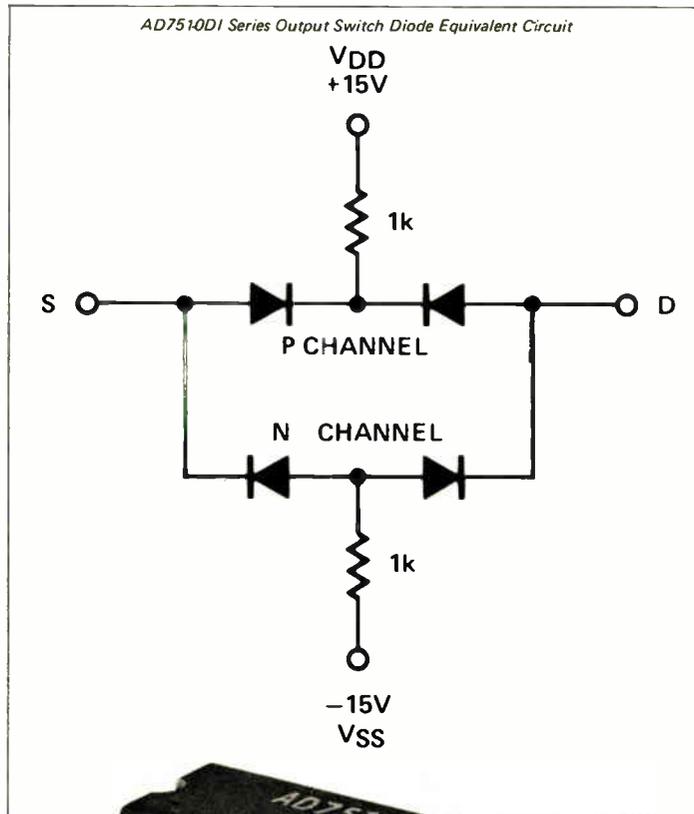

But not Analog Devices' AD7510 family of DI CMOS analog switches. They belong to a whole new generation. With positive overvoltage protection, but without any inhibition on performance.

We accomplished it through a unique design, utilizing "on-chip" resistors in series with the power supply. It provides as much as $\pm 25\text{V}$ overvoltage protection. But the resistors only switch in when an overvoltage condition occurs. So normal performance never suffers. And you get both the main assets of an analog switch: a low "ON" resistance of 75Ω and a low leakage current of 400pA .

The equivalent circuit of the output switch element shows that, indeed, the $1\text{k}\Omega$ limiting resistors are in series with the back-gates of the P- and N-channel output devices – not in series with the signal path between the S and D terminals.

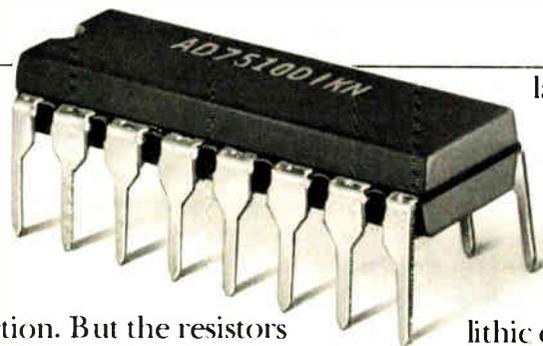

This design, combined with our dielectrically-isolated CMOS fabrication process, prevents latch-up. And allows TTL/CMOS direct interfacing. We also included two other measures of security. Silicon nitride passivation to ensure long term stability and monolithic construction for reliability.

Now when it comes to protecting CMOS switches so they can survive in the real world, Analog Devices knows best. Write for our 8-page technical bulletin on the entire family of DI CMOS protected analog switches, to Analog Devices, the real company in precision measurement and control.

**ANALOG
DEVICES**

The real CMOS switch company

Analog Devices, Inc., Box 280, Norwood, Massachusetts 02062. East Coast: (617) 329-4700, Midwest: (312) 894-3300, West Coast: (213) 595-1783, Texas: (214) 231-5094. Belgium: 03 3827 07, Denmark: 97 95 99, England: 01/94 10 466, France: 686-7760, Germany: 089/53 03 19, Japan: 03/26 36 826, Holland: 076-879251, Switzerland: 022/319704 and representatives around the world.

The Threat

Japanese trade and technology

The Opportunity

Today's microprocessor explosion


The Conference

Learn how to cope with the threat
and make the most of the opportunity.

1977 Electronics Conference

**December 7-8
Washington D.C.**

Send in the registration form today



1 How to cope with the Japanese trade and technology threat.

The gathering wave of Japanese technology: What will the impact be? Japan's share of the semiconductor market is still small and its share of the computer market is even smaller. But the Japanese have set their sights on these targets and their progress in the past couple of years has been startling. *Wilfred J. Corrigan*, Chairman and President, Fairchild Camera and Instrument Corp. Other speakers to be announced.

What must American companies do to keep their technological edge? In the past the U.S. electronics industries have been the world's unquestioned technological leaders. A serious challenge is developing now in semiconductors, computers, fiber optics, and other areas. In the past couple of years, Japanese research and development programs have begun to close the gap, and it is the Japanese government that is financing much of the R & D. *J. Fred Bucy*, President, Texas Instruments Incorporated.

The Labor Department's Response to the Japanese Challenge: Greater Japanese penetration in the market means fewer jobs for U.S. workers. Deputy Under Secretary of Labor for International Affairs will give the Labor Department's plans for action. *Howard D. Samuel*, Deputy Under Secretary for International Affairs, U.S. Department of Labor, Washington, D.C.

How to succeed in business with the Japanese: Experts will outline some of the different ways of doing business with the Japanese, listing the advantages and potential pitfalls of each. *Bernard V. Vonderschmitt*, Vice President and General Manager, Solid State Division, RCA Corporation. *Terry Wong*, Director, Business Development, Microelectronic Devices, Rockwell International Corporation.

How American electronic companies can win the battle for foreign markets: Some portions of the Japanese marketing effort—financing terms, for example—are tough to counter, but other tools are available to U.S. companies. *Richard Hodgson*, Senior Vice President, International Telephone and Telegraph Corporation.

Japan versus the U.S.: The government response: Richard Heimlich will discuss the Carter Administration's response to the question of Japanese competition and describe what steps the Office of Special Trade Negotiations is taking. *Richard W. Heimlich*, Assistant Special Trade Representative for Industrial Trade Policy, Office of the Representative for Trade Negotiations, Washington, D.C.

How can domestic electronics firms respond to the Japanese marketing threat in the U.S.? Leading experts from the U.S. industries will give their insights into steps U.S. firms can take to cope with the Japanese challenge. *L. J. Sevin*, Chairman of the Board, Mostek Corporation.

2 The potential of microprocessors: What is going to happen?

The outlook in microprocessors: Where are they going next? Microprocessor development is far from complete. One of the leading microprocessor experts will tell you how he sees microprocessors developing. *Leslie L. Vadasz*, Vice President and Assistant General Manager, Microcomputer Division, Intel Corporation.

The microprocessor universe: What's out there? What are the advantages of choosing a one-chip microprocessor? What are the advantages and disadvantages of 8-bit and 16-bit systems? What are the cost-performance trade-offs of chips versus boards? *Colin Crook*, Group Opera-

tions Manager, Microproducts, Semiconductor Group, Motorola, Inc. *Andrew C. Knowles*, Vice President/Group Manager, Digital Equipment Corporation. *Malcolm B. Northrup*, Vice President, Microelectronic Devices, Electronic Devices Division, Rockwell International Corporation. *James Van Tassel*, Manager, MOS Microprocessor, Texas Instruments Incorporated.

How to get started in microprocessors: What can a microprocessor do for your company? What will be the likely effect of microprocessors on your industry? *Eric Garen*, Vice President, Integrated Computer Systems.

3 The economy and the markets: Where are they going?

Electronics markets in the coming year: A preview. *Electronics* publisher Dan McMillan and Executive Editor Samuel Weber will give a special preview of the annual *Electronics* market forecast, looking at worldwide market prospects. *Dan McMillan*, Publisher, *Electronics*. *Samuel Weber*, Executive Editor, *Electronics*.

Where is the economy going and what does it mean for you? Will the economy lose steam by mid-1978? What does future economic growth rate mean for the inventory levels electronics firms should maintain? If capital spending takes off, what should that mean for your business? *Douglas Greenwald*, Vice President—Economics, McGraw-Hill Publications Company.

Send registration form to:
McGraw-Hill Conference & Seminar Group • 1221 Avenue of the Americas—Room 3677 • New York, N.Y. • (212) 997-4930
Please register me for Threats and Opportunities: How To Face Today's Challenges, sponsored by **Electronics**.
Conference fee: \$300

E-2

Name _____
Company _____ Title _____
Street _____
City _____ State _____ Zip _____
Business Phone _____
Applicant's signature _____ Date _____

Check one:
 Payment enclosed
 Please bill me directly
 Please bill company



Hotel reservations: The Shoreham Hotel is holding a block of rooms for this conference. For reservations, contact the Shoreham directly. Be sure to identify the title of the conference.

Cancellation policy: No refunds will be made seven days prior to the Conference. You may, if you wish, send a substitute.

Get the TM 990/100 μ P module from these distributors.

- ALABAMA:** Huntsville, Hall-Mark/Huntsville (205) 837-8700
- ARIZONA:** Phoenix, Kierulff Electronics (602) 243-4101, R V Weatherford (602) 272-7144, Tempe, G S Marshall (602) 968-6181
- CALIFORNIA:** Anaheim, R V Weatherford (714) 633-9633, Canoga Park, G S Marshall (213) 999-5001, El Monte, G S Marshall (213) 866-0141, El Segundo, TI Supply (213) 973-2571, Glendale, R V Weatherford (213) 849-3451, Goleta, RPS, Inc. (805) 964-6823, Irvine, Cramer/Los Angeles (714) 979-3000 (213) 771-8300, G S Marshall (714) 556-6400, Los Angeles, Kierulff Electronics (213) 885-5511, RPS, Inc. (213) 748-1271, Mountain View, Time Electronics (408) 965-8000, Palo Alto, Kierulff Electronics (415) 968-5292, Pomona, R V Weatherford (714) 623-1261, San Diego, Cramer/San Diego (714) 565-1881, Kierulff Electronics (714) 278-2112, G S Marshall (714) 278-6350, RPS Inc. (714) 292-5611, R V Weatherford (714) 278-7400, Sunnyvale, Cramer/San Francisco (408) 739-3011, G S Marshall (408) 732-1100, TI Supply (408) 732-5555, Torrance, Time Electronics (213) 320-0880, Woodland Hills, Semiconductor Concepts (213) 884-4560
- COLORADO:** Denver, Cramer/Denver (303) 758-2100, Kierulff Electronics (303) 371-6500, Englewood, R V Weatherford (303) 761-5432
- CONNECTICUT:** Hamden, Arrow Electronics (203) 248-3801, North Haven, Cramer/Connecticut (203) 239-5641, Orange, Milgray/Connecticut (203) 795-0714
- FLORIDA:** Clearwater, Diplomat/Southland (813) 443-4514, Ft. Lauderdale, Arrow Electronics (305) 776-7790, Hall-Mark/Miami (305) 971-9280, Hollywood, Cramer/Hollywood (305) 923-8181, Orlando, Cramer/Orlando (305) 894-1511, Hall-Mark/Orlando (305) 855-4020, Winter Park, Milgray Electronics (305) 647-5747
- GEORGIA:** Norcross, Cramer/Atlanta (404) 448-9050
- ILLINOIS:** Arlington Heights, TI Supply (312) 593-7660, Elk Grove, Hall-Mark/Chicago (312) 437-8800, Kierulff Electronics (312) 640-0200, Chicago, Newark Electronics (312) 638-4411, Mt. Prospect, Cramer/Chicago (312) 593-8230
- INDIANA:** Ft. Wayne, Ft. Wayne Electronics (219) 423-3422, Indianapolis, Graham Electronics (317) 634-8202
- IOWA:** Cedar Rapids, Decco (319) 365-7551
- KANSAS:** Shawnee Mission, Hall-Mark/Kansas City (913) 888-4747
- MASSACHUSETTS:** Billerica, Kierulff Electronics (617) 667-8331, Newton, Cramer/Newton (617) 969-7700, Waltham, TI Supply (617) 890-0510, Woburn, Arrow Electronics (617) 933-8130
- MARYLAND:** Baltimore, Arrow Electronics (202) 737-1700, Hall-Mark/Baltimore (301) 796-9300, Columbia, Technico (301) 461-2200, Gaithersburg, Cramer/Washington (301) 948-0110, Kierulff Electronics (301) 948-0250, Hyattsville, Milgray/Washington (301) 459-2222
- MICHIGAN:** Detroit, Newark Electronics (313) 967-0600, Wyoming, Newark Electronics (616) 241-6681
- MINNESOTA:** Bloomington, Arrow Electronics (612) 888-5522, Edina, Cramer/Minnesota (612) 835-7811
- MISSOURI:** Earth City, Hall-Mark/St. Louis (314) 291-5350, Kansas City, LCOMP-Kansas City (816) 221-2400, St. Louis, LCOMP-St. Louis (314) 647-5505
- NEW HAMPSHIRE:** Manchester, Arrow Electronics (603) 668-6968
- NEW JERSEY:** Camden, General Radio Supply (609) 964-8560, Cherry Hill, Cramer/Pennsylvania (215) 923-5950, (609) 424-5993, Milgray/Delaware Valley (609) 424-1300, (215) 228-2000, Clark, TI Supply (201) 382-6400, Clifton, Wilshire Electronics (201) 340-1900, Moonachie, Cramer/New Jersey (201) 935-5600, Moorestown, Arrow Electronics (609) 235-1900, Rutherford, Kierulff Electronics (201) 935-2120, Saddlebrook, Arrow Electronics (201) 797-5800
- NEW MEXICO:** Albuquerque, Cramer/New Mexico (505) 265-5767
- NEW YORK:** East Syracuse, Cramer/Syracuse (315) 437-6671, Endwell, Wilshire Electronics (607) 754-1570, Farmingdale, Arrow Electronics (516) 694-6800, Hicksville, Kierulff Electronics (516) 433-5530, Fishkill, Arrow Electronics (914) 896-7530, Freeport, Milgray Electronics (516) 546-6000, (201) 432-4300, Hauppauge, Cramer/Long Island (516) 231-5600, Semiconductor Concepts (516) 273-1234, Rochester, Cramer/Rochester (716) 275-0300, Rochester, Radio Supply (716) 454-7800, Wilshire Electronics (716) 442-9560
- NORTH CAROLINA:** Raleigh, Hall-Mark/Raleigh (919) 832-4465, Winston-Salem, Cramer/Winston-Salem (919) 725-8711
- OHIO:** Cleveland, Arrow Electronics (216) 464-2000, Cramer/Cleveland (216) 248-8400, Columbus, Hall-Mark/Ohio (614) 846-1882, Dayton, ESCO Electronics (513) 226-1133, Kettering, Arrow Electronics (513) 253-9176
- OKLAHOMA:** Tulsa, Hall-Mark/Tulsa (918) 835-8458, TI Supply (918) 582-8272
- PENNSYLVANIA:** Huntingdon Valley, Hall-Mark/Philadelphia (215) 355-7300
- TEXAS:** Austin, Hall-Mark/Austin (512) 837-2814, Dallas, Hall-Mark/Dallas (214) 231-6111, TI Supply (214) 238-6821, Houston, Harrison Equipment (713) 652-4700, TI Supply (713) 776-6511, R V Weatherford (713) 688-7406
- UTAH:** Salt Lake City, Diplomat/Altland (801) 486-7227, Standard Supply (801) 486-3371
- VIRGINIA:** Roanoke, Technico (703) 563-4975
- WASHINGTON:** Seattle, Almac/Stroum Electronics (206) 763-2300, Cramer/Seattle (206) 575-0907, Kierulff Electronics (206) 575-4420
- WISCONSIN:** Oak Creek, Arrow Electronics (414) 764-6600, West Allis, Hall-Mark/Milwaukee (414) 476-1270
- CANADA:** Calgary, Cam Gard Supply (403) 287-0520, Downsview, CESCO Electronics (416) 661-0220, Zentronics (416) 635-2822, Edmonton, Cam Gard Supply (403) 426-1805, Halifax, Cam Gard Supply (902) 454-8581, Kamloops, Cam Gard Supply (604) 372-3338, Moncton, Cam Gard Supply (506) 855-2200, Montreal, CESCO Electronics (514) 735-5511, Future Electronics (514) 735-5775, Zentronics (514) 735-5361, Ottawa, CESCO Electronics (613) 729-5118, Future Electronics (613) 232-7757, Zentronics (613) 238-6411, Quebec City, CESCO Electronics (418) 524-4641, Regina, Cam Gard Supply (306) 525-1317, Rexdale, Future Electronics (416) 677-7820, Saskatoon, Cam Gard Supply (306) 652-6424, Vancouver, Cam Gard Supply (604) 291-1441, Winnipeg, Cam Gard Supply (204) 786-8481

New products

Subassemblies

Hybrids built from submodules


Power circuits of 25-A type include bridges, doublers, and an ac switch


Using a submodule approach to construction, FMC Corp. has become the fourth company to enter the market with encapsulated hybrid power-module assemblies. Already in the business—estimated by FMC at \$1.7 million a year in sales and growing at an annual rate of 45%—

are International Rectifier Corp., General Electric Co., and Unitrode Corp. [*Electronics*, Sept. 29, p. 132].

The FMC devices, called Power-Mods, consist of a family of five single-phase, 25-ampere-type, encapsulated hybrid bridges of transfer-molded construction.

Directly intermountable and interchangeable with all standard 25-A hybrids on the market, the Power-Mods are available in circuit configurations that include hybrid bridges with or without freewheeling diodes, an ac switch, a doubler with diode and silicon controlled rectifier, and an SCR doubler. The company's packaging method also permits various custom configurations, subject only to the limitation that the assembly have no more than six

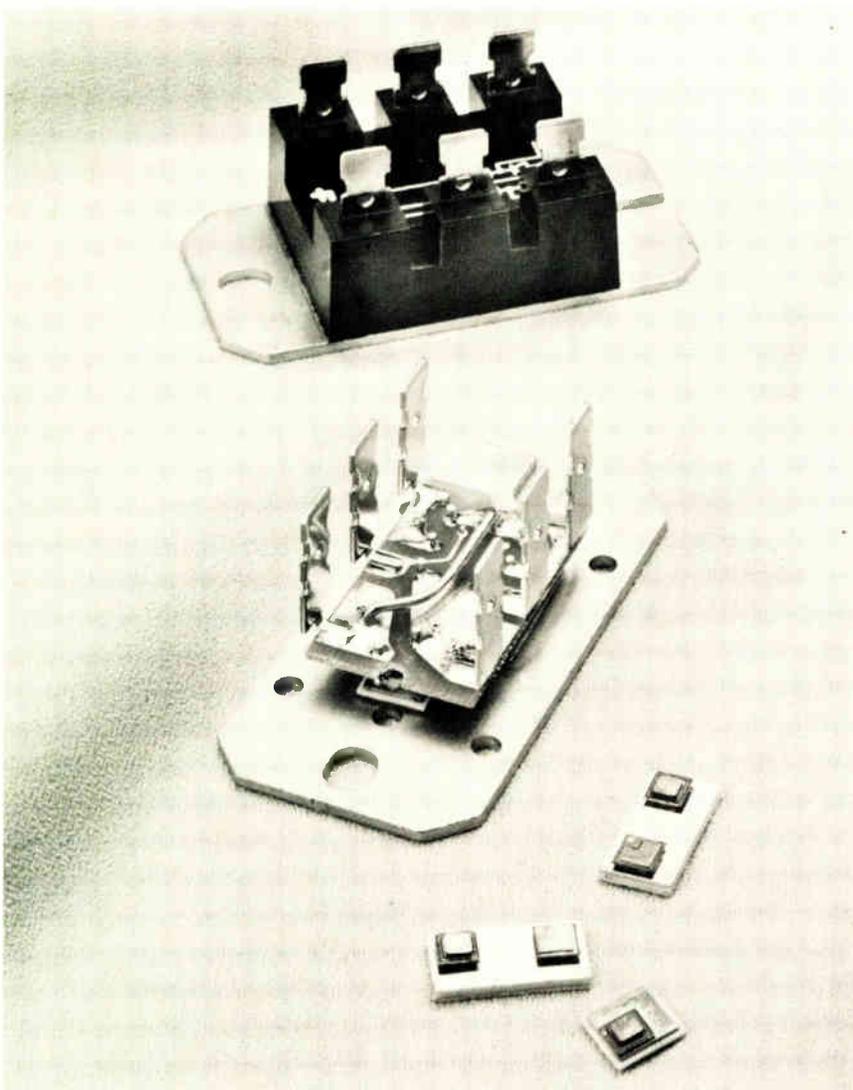

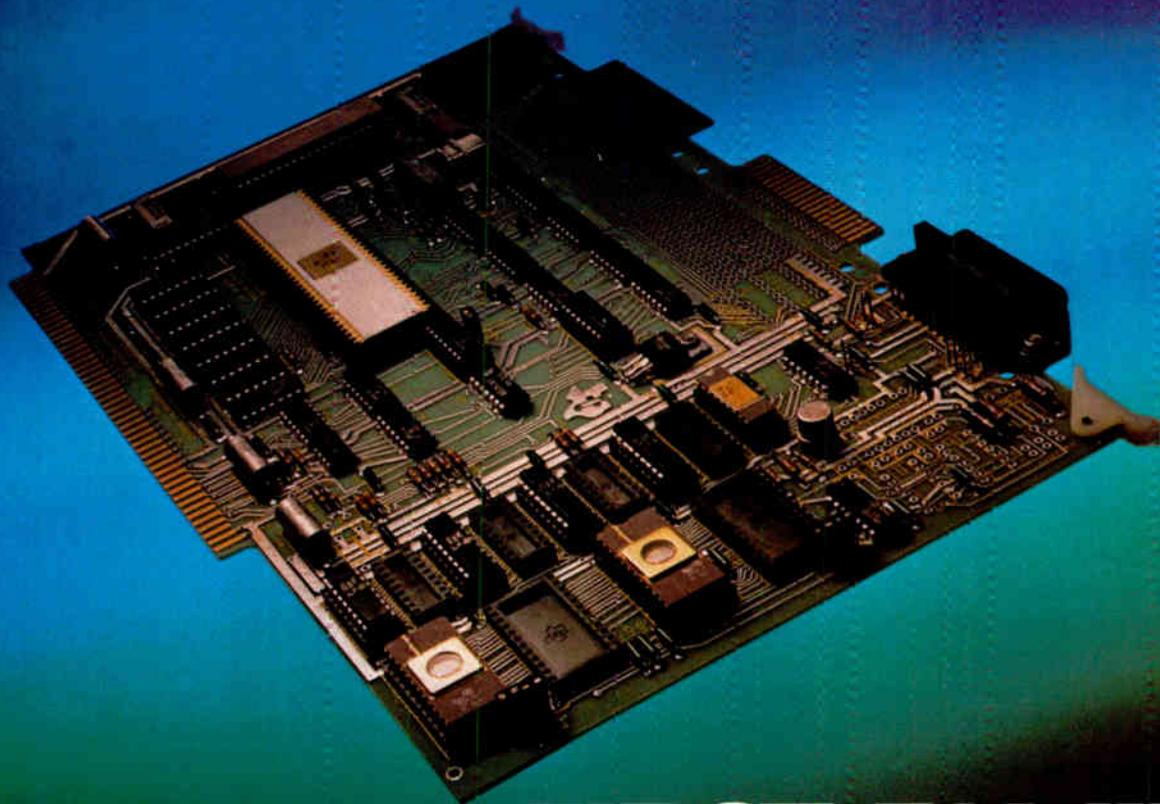

FIRST FAMILY

First low-cost, 16-bit μ P modules. For OEMs. From Texas Instruments.

The new TM 990 Series. Fastest, easiest way to get a microprocessor-based design to market. Ideal for μ P evaluation. And a cost-effective production alternative.

First in TI's new series: TM 990/100M. A TMS 9900 microprocessor, I/O circuits, 1K x 16-bit EPROM and 256 x 16-bit RAM on a single 7½" x 11" board. Pretested and ready to go.

The EPROM, which includes a self-contained software monitor (TIBUG™), is expandable to 4K x 16 bits. The RAM to 512 x 16 bits. Also on board: 16 lines of programmable parallel I/O, TTY current-loop or RS 232 terminal interface. Two programmable interval tim-

ers; 15 external hardware interrupts. Plus a user prototyping area. All control, address and data lines are fully available to facilitate expansion to extremely large systems.

Leadership price

At a single unit price of \$450.00, the TM 990/100M is an economical means for checking out what TI's 9900 microprocessor can do. And at a 50-piece price of \$315.00, it is attractive for production runs.

More modules coming

A TMS 9980-based CPU module. A ROM/RAM memory expansion module. An I/O expansion module. A microterminal for data entry/

display. A line-by-line assembler in EPROM.

9900 First Family compatibility

The TM 990 Series modules are supported by the new advanced AMPL™ software development system. And are fully compatible with all members of TI's 9900 First Family. So you can move to the TMS 9900 components level. Or to TI's 990/4 microcomputer. Easily. Economically.

Order the TM 990/100M today from your TI distributor. Or for details, write Texas Instruments Incorporated, P.O. Box 1443, M/S 653, Houston, Texas 77001.



TEXAS INSTRUMENTS
INCORPORATED

VICTORY SELECTIVITY


THERMISTORS

New-Low cost SensiChips® • Small size • From .020" sq. to .300" sq. • Thickness from .005 to .070 in. • Resistances from 5 K ohms to 1 meg. • Typical response time 4 seconds. • Protective coating available.



VICTORY ENGINEERING CORP.

VICTORY ROAD, SPRINGFIELD, NEW JERSEY 07081
TWX 710-983-4430 TEL: 201-379-5900

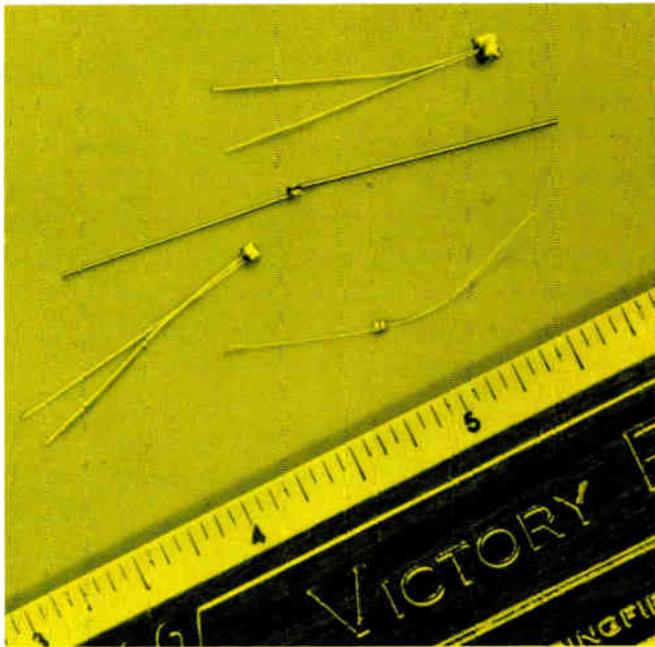

Circle 176 on reader service card

16 POSITIONS

INTERSWITCH now offers two new 16-position thumbwheel switches - the Type H front mounting switch and the Type P rear mounting switch.

Each switch module measures only 10-mm wide and is available with a multitude of options which INTERSWITCH offers on all of its thumbwheel switches.


Available from stock and local distribution. Write or call today for complete information.



ONE OF THE PURDY GROUP OF COMPANIES

770 Airport Boulevard
Burlingame, CA 94010

(415) 347-8217 • TWX 910-374-2353

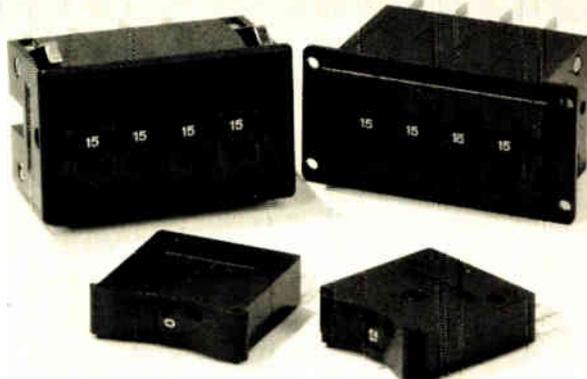

176 Circle 273 on reader service card

New products

external terminals.

Applications for the assemblies include dc motor controls, battery chargers, solid-state circuit breakers, generator exciters, lighting control, temperature controllers, cathodic protection, and power supplies.

In FMC's submodule approach to construction, all semiconductor elements are glass-passivated and mounted on a copper-clad ceramic substrate. The submodule provides efficient thermal spreading and transfer through the copper pad, plus 2,500-volt base-plate isolation through the ceramic. Each SCR (or each SCR and diode pair) and the freewheeling diode are mounted on separate submodules.

At this point, before hybrid assembly, each submodule is fully tested. This greatly enhances the consistency of the final yield and therefore the reliability of delivery schedules, the company points out.

Next, the submodule is mounted on a heat sink and the elements interconnected with a thick-clad epoxy-glass circuit board. The complete encapsulated assembly is then formed by means of a transfer-molding process.


Each hybrid is labeled with a decal that shows the circuit diagram, thus permitting quick identification of type and of terminal connections.

In the PowerMod family are two single-phase half-wave hybrid bridge circuits—one with a freewheeling diode for use in applications with inductive loads. The ac switch, also a member of the new family, is rated at 50 A and consists of two thyristors connected antiparallel. The fourth configuration now available is an SCR and rectifier doubler, rated at 35 A, that can be used in parallel with a single-phase bridge to form a three-phase bridge, increasing maximum load output substantially. The fifth standard configuration is an SCR doubler—two SCRs in series with a center tap—is also rated at 35 A. Two or three units can be combined to make a single- or three-phase full-control bridge circuit.

A typical price, in lots of 1 to 24 pieces, is \$28.75 each for the 30-A, 600-v bridge with freewheeling

Recalibrate.

(Your thinking and your budget)

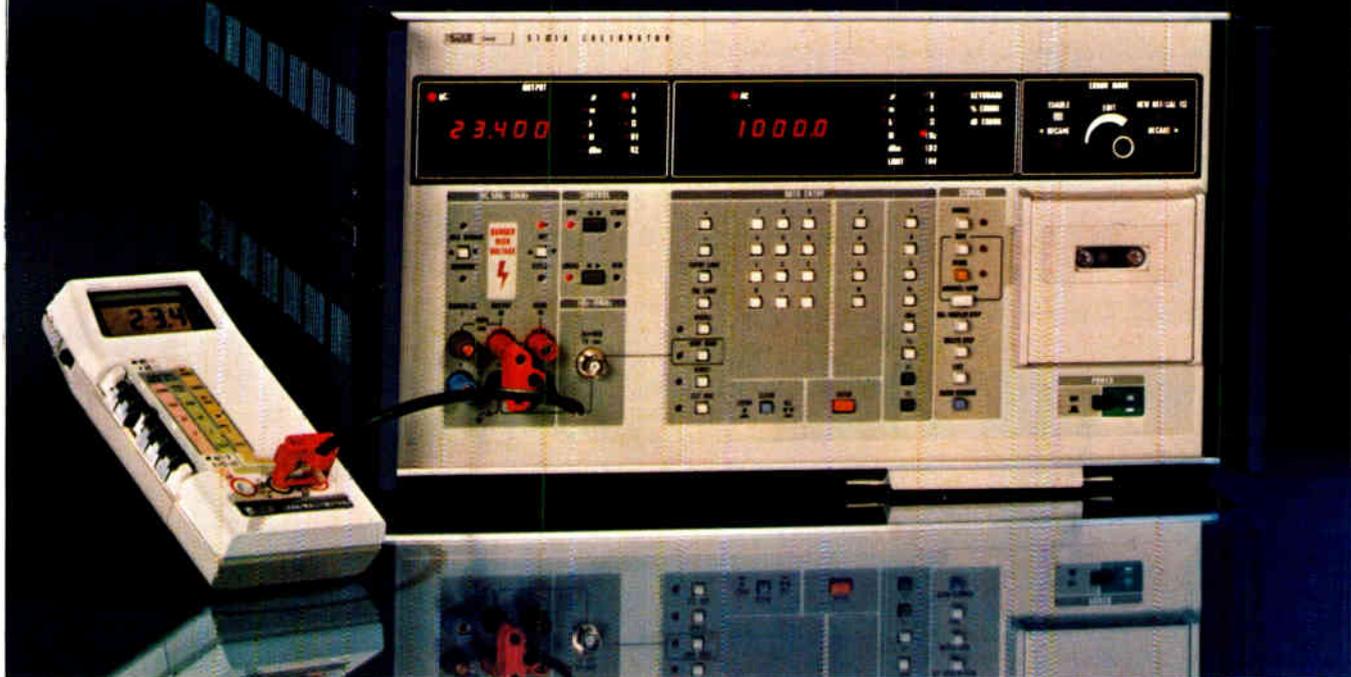

Our new 5100/5101A calibrators can calibrate VTVMs, VOMs, 3½-, 4½- and most 5½-digit DMMs around, in a fraction of the time it takes you now! (It's a cal lab in a box! All at an average price under \$9,000.)

For \$10,000 to \$15,000, you could invest in an intricate maze of instruments that takes a wizard to operate. Or, you could fill a room with computer-based hardware and expensive talent. About \$100,000 worth.

The Fluke μ P-controlled alternative.

We've designed the new 5100A and 5101A for production test, QA and cal lab applications that need large system flexibility at a fraction of large system cost.

The heart of our new meter calibrators is a microprocessor that eliminates mechanical switches—the largest contributor to failure in conventional calibrators.

And, you can enter your tolerances in dB, volts or percent. The μ P converts for you! For safety, store current or voltage limits and protect both your operator and the meter being calibrated.

Microprocessor control also facilitates scaling (for linearity checking), and makes your calibrator a *rangeless* instrument, always selecting the proper range for maximum resolution, *automatically!*

Automation or economy? Fluke has both.

The 5100A is perfect for manual bench operation or integration into

your existing cal system to upgrade it to Fluke standards of calibration excellence. Priced at \$6,995*, you save dollars but don't sacrifice accuracy or overall performance.

For perfection in automated calibration, you'll want the 5101A with its *mini-tape cassette reader*, a unique new feature that allows you to store up to 58 calibration settings, including limits and tolerances. Only \$8,995*.

Both models have a friendly calculator-type keyboard. And, both have the RS232 or IEEE 488 system options you want for remote operation or hard-copy printouts of results.

Call (800) 426-0361, toll free. Ask for complete technical specs or the location of your local Fluke office or representative. Or, write: John Fluke Mfg. Co., Inc., P.O. Box 43210, Mountlake Terrace, WA 98043.

*U.S. price only.




Command Performance: Demand Fluke Calibrators.





Terminals For The Times

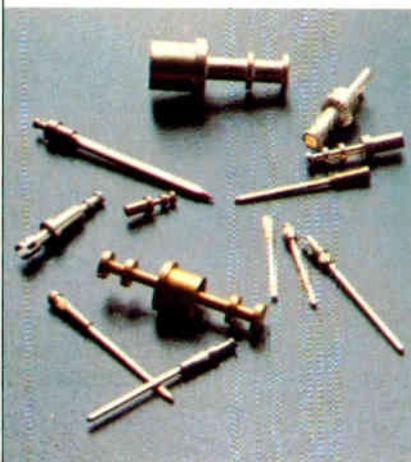

Today's complex circuit designs often call for miniaturized solder terminals. Cambion has what you need along with a full range of conventional solder terminals. You'll find standard insulated types; press mount styles; single and double or even triple turret models with superior plating on all important surfaces. Even though Cambion makes them in huge quantities, the quality never slips. Write for our giant catalog of components. Cambridge Thermionic Corporation, 445 Concord Ave., Cambridge, MA 02138. Phone: 617-491-5400. In California, 2733 Pacific Coast Hwy, Torrance, CA 90505. Phone: 213-326-7822.

Standardize on

CAMBION
The Guaranteed Electronic Components


New products

diode. Single units are available from distributors' stock. Delivery time for quantity orders is three to six weeks.

FMC Corp., Semiconductor Division, 800 Hoyt St., Broomfield, Colo. 80020. Phone Brian Bachman at (303) 469-2161. [381]

Dc power amplifier delivers 100 watts

A linear power amplifier for driving dc torque motors, servo motors, and other loads requiring proportional power up to 100 watts features adjustable current limiting, a full-power bandwidth of 5 kilohertz, and complete protection against short circuits, excessive input voltage, and overheating. The model 100 PMA is an operational-type amplifier with a

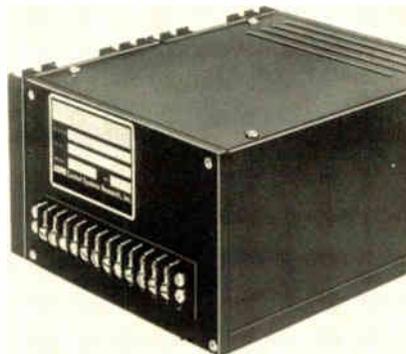

single-ended output stage that gives it much the same drive flexibility as standard op amps. Powered directly by the 115-volt ac line, the amplifier carries an unconditional two-year guarantee.

Servo Products Group, Control Systems Research Inc., 632 Fort Duquesne Blvd., Pittsburgh, Pa. 15222. Phone Jim Dudiak at (412) 566-1200 [383]


Voltage follower slews at 3,000 volts/microsecond

The model 9963 voltage follower and current booster combines a minimum input resistance of 10^{10} ohms with a small-signal bandwidth of 200 megahertz and a minimum slew rate

VAC
VACUUMSCHMELZE

VACOZET®

a semi-hard
magnetic alloy
with rectangular
hysteresis loop
for impulse controlled
self latching relays.

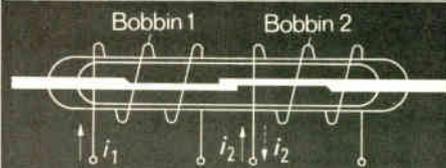

Properties:

- high remanence
- adjustable coercitive force

VACOZET 200 258 655 923

H _c	A/cm	15	30	50	75
B _r	T	1.5	1.45	1.45	1.25
B _r /B ₁₀₀	%	ca. 90			

For data sheet and
further information apply to

**VACUUMSCHMELZE
GMBH**

6450 HANAU

W.-Germany · POB 109

Circle 275 on reader service card

Electronics/October 27, 1977

We've lowered the cost of environmentally-qualified terminals.

Interstate Electronics has developed a new family of ruggedized plasma display terminals that cost significantly less than any comparable military terminals.

Because Interstate Electronics—and nobody else—gives you “next generation” plasma display electronics. Through innovative circuit integration, we've reduced terminal size, weight and electrical complexity. As well as price.

The PD Series can be specified for a variety of military environments—sheltered, shipboard and airborne.

- Each model offers:
- 4,000 character display capability
 - Complete graphics capability

- Extremely fast transfer rates (up to 50K baud)
- Inherent memory and selective write/erase to free computer time
- Extremely long panel life

We also offer a complete selection of options, including:

- Touch panel input
- Special function keys
- Programmable character generator
- Multiple input/output capability
- Software support packages

Interstate can help you select the optimum

terminal configuration for your requirements. Give us an opportunity to discuss your operational environment and performance needs.

Write or call Don Poulos, Products Manager, Computer Products, Interstate Electronics Corporation, 707 E. Vermont Ave., Anaheim, CA 92802. (714) 635-7210 or (714) 772-2811.

**INTERSTATE
ELECTRONICS
CORPORATION**

SUBSIDIARY OF **ATO**


Circle 179 on reader service card

Copyright 1977
Interstate Electronics Corporation




AO

If this is all you're seeing,

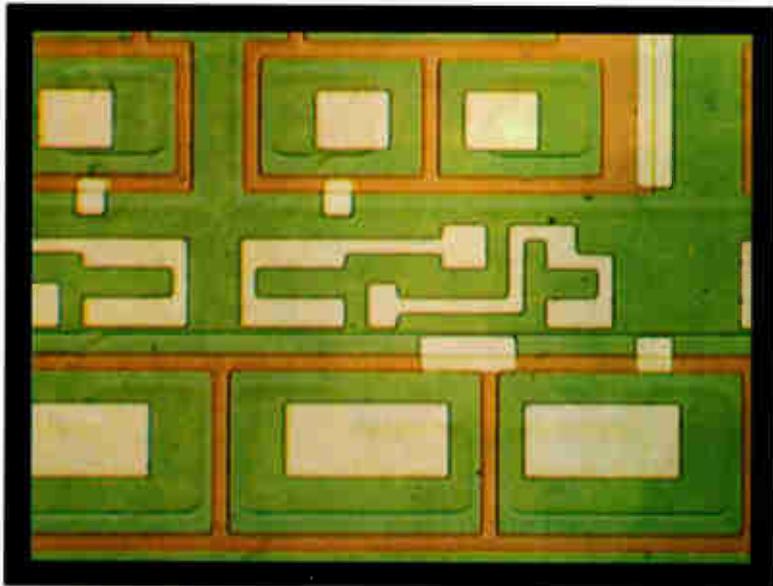

this is what you're missing

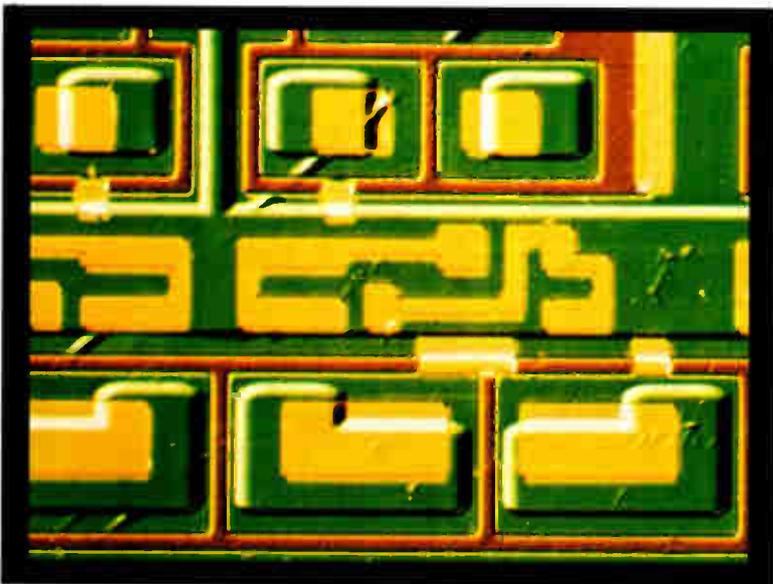


The AO® DICV Differential Interference Contrast Microscope makes the big difference.

With a standard brightfield microscope you see only what is shown in the top sample.

Now look at the bottom sample. The AO DICV Microscope can help you see surface irregularities, inclusions and faults long before final testing. Long before you have invested more production time and money in a circuit or component that is defective.

By using incident light, after Nomarski, the AO DICV Microscope reveals significant detail in outstanding relief through vivid contrast enhancement.

So, if missing detail is costing you money, you can't afford to overlook the AO DICV Microscope. For details or a demonstration see your AO Dealer or write American Optical, Scientific Instrument Division, Buffalo, NY 14215.

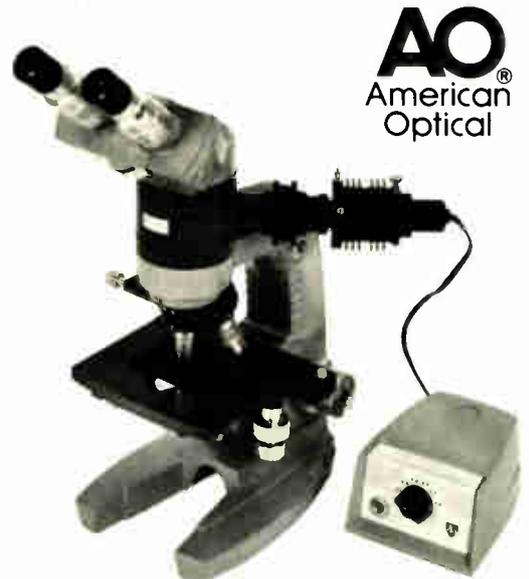

AO
American
Optical


New products

of 3,000 volts per microsecond. The dc-coupled amplifier also has a full-power bandwidth of 50 MHz, a maximum bias current of 100 picoamperes, and a maximum offset-voltage drift of 400 microvolts per °C. Voltage gain is typically 0.96, with 0.92 specified as the minimum. The 9963 is electrically similar to National's LH0063 and is housed in a standard 24-pin dual in-line package. It sells for \$44 in unit quantity, \$39.50 each for three to nine pieces, and \$35.50 each in lots of 10 to 29. Delivery is from stock.

Optical Electronics Inc., P.O. Box 11140, Tucson, Ariz. 85734. Phone Mrs. Mac at (602) 624-8358 [384]

Multi-output supplies are adjustable over a 20% range

A line of multiple-output power supplies for general industrial electronics applications—particularly in computer and microprocessor

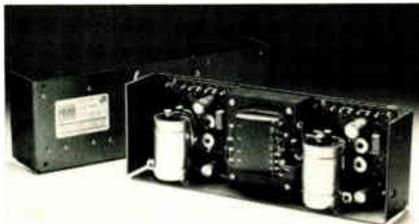

systems—includes units with voltages from 5 volts dc to 28 v dc, all adjustable $\pm 10\%$ about their normal values. The supplies are offered with current ratings from 1 ampere to 12 A and with such standard features as: complete isolation between outputs, current limiting, short-circuit protection, universal ac inputs for 115/230 v ac at 47 to 440 hertz, and UL recognition. Among the available options are overvoltage protection.

General specifications include line and load regulation to within 0.1%, 0.1% ripple, 50-microsecond response time, 0.02%/°C temperature coefficient, and 0°C to 50°C operating-temperature range. Prices for the units, designated the SPS-D and SPS-T series, range from \$104 to

Our attenuators will always level with you.



Honest attenuation.

In your equipment or on the bench, Telonic Attenuators provide reliable "specs or better" performance. We make sure, because we use them in our own instruments.

Our thick film resistive elements are made in-house to assure you of top quality. Their operating parameters enable us to guarantee accuracies in some models to $\pm .02$ dB, frequency coverage to 4GHz and power-handling capabilities up to 25 watts. Here's the selection, in 50- or 75-ohm versions:

Variable (Rotary) Types


1, 10, 69, 100, or 110 dB ranges
0.1, 1.0, and 10 dB steps.

Fixed Value Types

3, 6, 10, 20, 30, 40, 50, or 60 dB
SMA, TNC, BNC, or N connectors.

Telonic also supplies bench-top versions incorporating sequenced rotary models, and special versions to fit your requirements. Call us TOLL

FREE (except in Calif.) for further specs, prices, more information, or our new Attenuator Catalog. Telonic Altair, 2825 Laguna Canyon Road, Box 277, Laguna Beach, CA 92652. Phone: 714/494-9401
TOLL FREE: 800-854-2436.



here's your stimulus

tickle your dut!

The E-H 1500 Series

MOS	0 to $\pm 20V$	$T_R = 5ns$ to $0.8ms$
T2L	0 to $\pm 10V$	$T_R = 3ns$ to $0.8ms$
ECL	0 to $\pm 2V$	$T_R < 500ps$
CML	0 to $\pm 2V$	$T_R < 500p$

IT'S A PULSE GENERATOR FAMILY!

Repetition Frequency to 50 MHz Pulse Width 3ns to 1 second
Pulse Delay 3ns to 1 second

REMOTE PULSES RIGHT AT YOUR FIXTURE!


Interfaces available to you

IEEE 488 — ASC II — 16 bit — Parallel

The recognized standard of excellence in ATE pulses



515 11TH STREET
OAKLAND, CALIFORNIA 94607
PHONE (415) 834-3030

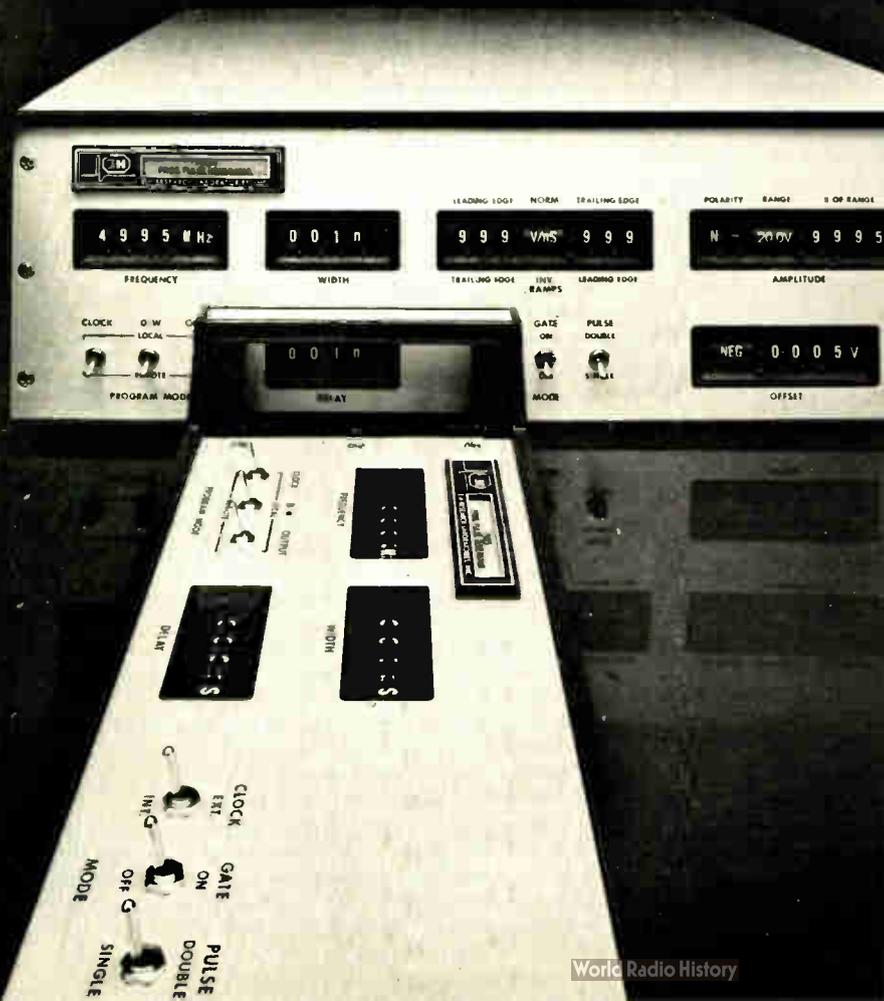


New products

\$139 with delivery from stock.
Standard Power Inc., 1400 South Village
Way, Santa Ana, Calif. 92705. Phone (714)
558-8512 [386]

Oscillator drifts less than
1 part in 10^9 per day

Available at any fixed frequency up
to 200 megahertz, the model CO-
220 very-high-frequency crystal os-
cillator is a compact unit with a

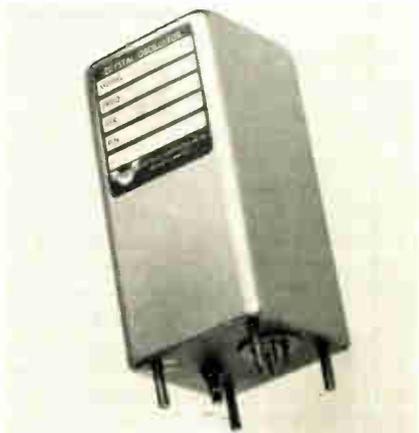

long-term drift rate of 1 part in 10^9
per day. Standard output power is 7
dbm, with 13 dbm available as an
option. Other options include voltage
control of frequency and operation
from $-55^{\circ}C$ to $75^{\circ}C$. The standard
temperature range is $0^{\circ}C$ to $50^{\circ}C$.

Vectron Laboratories Inc., 121 Water St.,
Norwalk, Conn. 06854. Phone Larry Jawitz
at (203) 853-4433 [385]


LC oscillators
cover 20 MHz to 200 MHz

A voltage-controlled LC oscillator,
model P-414, holds frequency devia-
tion to $\pm 10\%$. The unit is available
at any frequency from 20 megahertz
to 200 MHz, and it is stable within
 $\pm 0.5\%$ over the range from $10^{\circ}C$ to
 $60^{\circ}C$. Power output is +7 dbm into
50 ohms. The P-414 is priced at \$70
each in lots of 1,000. Delivery time is
8 to 10 weeks.

Greenray Industries Inc., 840 West Church
Rd., Mechanicsburg, Pa. 17055 [387]

← Circle 182 on reader service card

Need power-switching inductors for switching regulators? TRW/UTC has a stock answer.

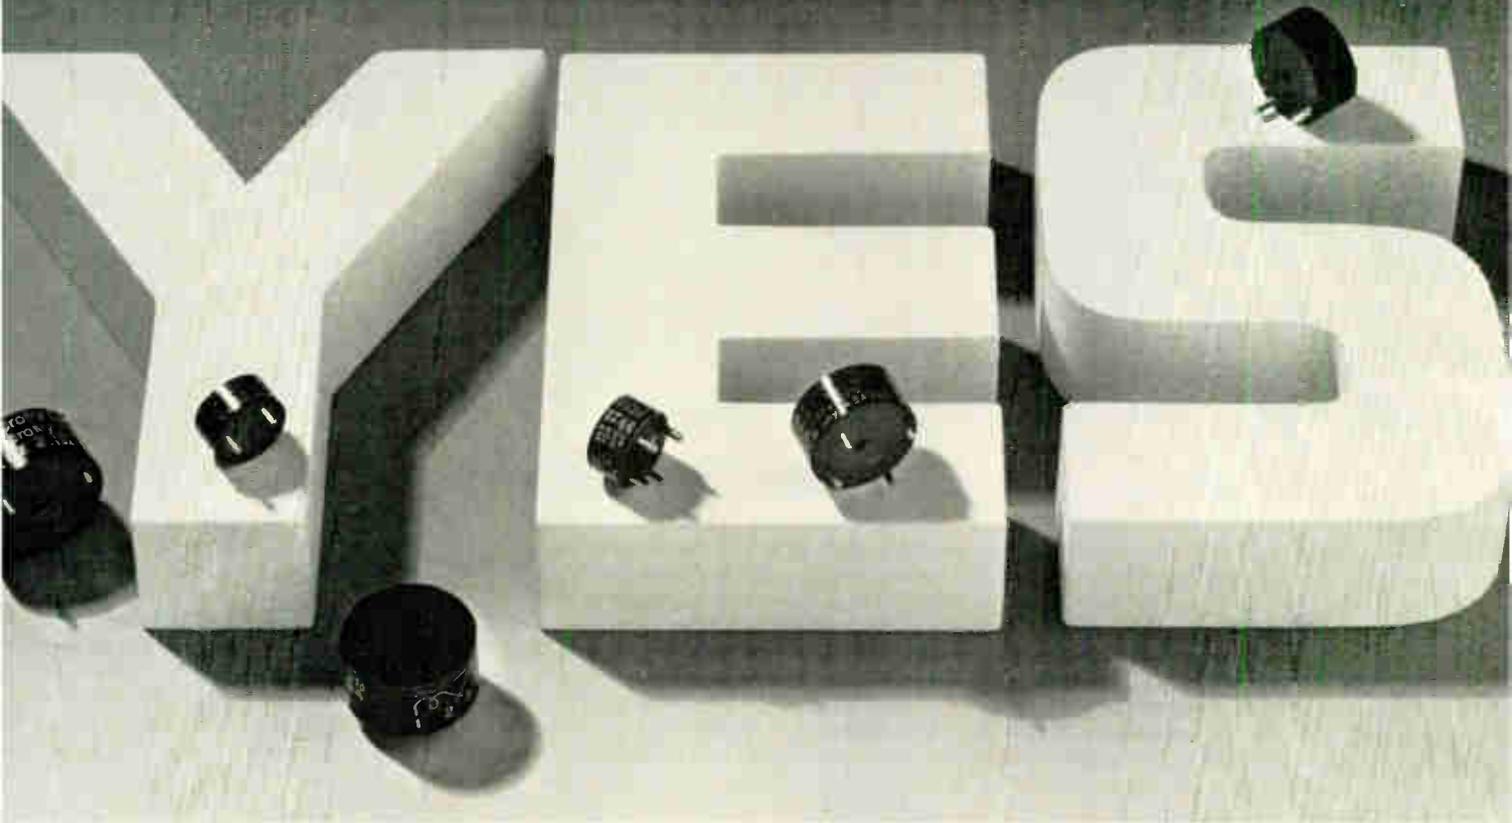

Introducing the SR series, a family of miniature high-performance, power-switching inductors.

Our SR Inductors reduce size and weight. Now you have off-the-shelf power-switching inductors with performance advantages over your in-house capabilities.

Low temperature rise and low loss characteristics combine to give the SR series high performance with maximum reliability. With an inductance range of 8 to 10,000 μH , a DC current range from .8 amps to 15 amps, SR Inductors have low losses in the 3 to 100 KHz frequency range, making them ideal for use in switching regulators and AC filter-choke applications.

Compact and easy to install, the SR family has pin

terminals for mounting on PC boards. Available with double windings, which when brought out to four terminals permit series, parallel, center-tapped or transformer connections.


Available from stock in three sizes. Type SRA measures 7/8-in. OD by 7/16-in. height; SRB measures 1-3/16-in. OD by 9/16-in. height; and SRC measures 1-3/8-in. OD by 3/4-in. height.

Check your authorized TRW/UTC local distributor for immediate off-the-shelf delivery or contact TRW/UTC Transformers, an Operation of TRW Electronic Components, 150 Varick Street, New York, N.Y. 10013. Area Code: 212 255-3500.

TRW UTC TRANSFORMERS

ANOTHER PRODUCT OF A COMPANY CALLED TRW

When reliability counts

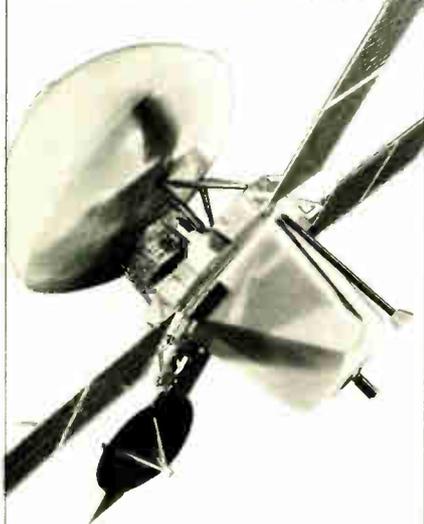

Count on Custom mica paper capacitors

Custom mica paper capacitors are used in a wide variety of applications from spacecraft to medical electronics — areas where component failure can be fatal.

For this reason, every capacitor we produce is subjected to stringent quality control testing. After all, our customers have to count on reliability!



CMR — wrap and fill



CEM — epoxy molded

CER — epoxy housed
Write for FREE Techni Tips.



CUSTOM ELECTRONICS, INC.
12 Browne Street, Oneonta, NY 13820
PH: 607-432-3880 TWX: 510-241-8292

New products

Communications

Test set cuts operating costs

Instrument package checks baseband parameters for low-capacity systems


Operators of small—say, one master group—telephone systems must make the same basic baseband measurements as are made on larger systems but typically must do it on a much smaller budget. The problem has been that available high-quality test equipment has suited the needs and pocketbooks of the large-system operators.

W & G Instruments Inc. has attacked this problem by putting together an instrument package called the RBTS (for radio baseband test system), which saves money by sacrificing bandwidth but not precision. The main difference between the RBTS and a more expensive instrument is that the new package

can only handle systems with up to 960 voice channels. This covers a large number of low-density systems such as those operated by railroads, automotive and trucking fleets, small telephone companies, and large corporations with their own private networks.

The RBTS is essentially four instruments in one: a selective level meter, a wideband meter, a voice-channel meter, and a broadband noise loader. The selective level meter measures pilot tones, carrier leak, and system frequency response. It also can be used for system alignment and to search for spurious tones. The wideband meter measures total system load and, in conjunction with the noise loader and a set of filters, makes noise-power-ratio measurements. The voice-channel meter measures voice level, voice-channel distortion, and voiceband switching tones. Because its output is extremely flat, the noise loader serves as the signal source when measuring system frequency response.


The key bandwidth-limiting component of the instrument package is its multipurpose AT-608 level meter. In its wideband mode, this unit acts

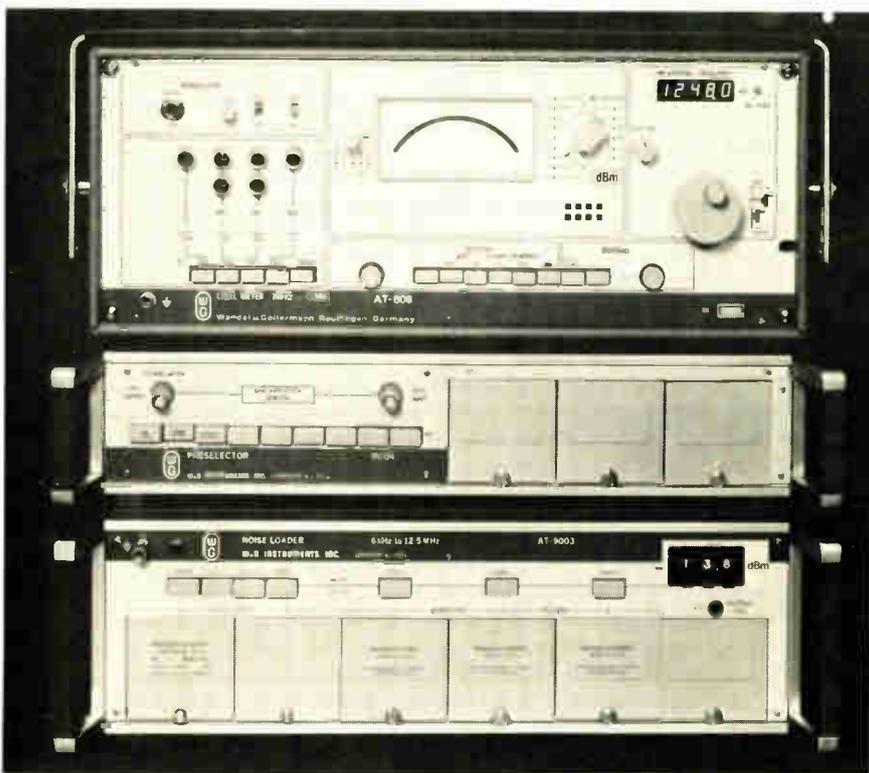

4-bit, one-chip micro- computers

Brainy enough
for anything
from TV games
to industrial
controls.

Block diagram of MN1400
with on-chip, 1024x8-bit ROM.

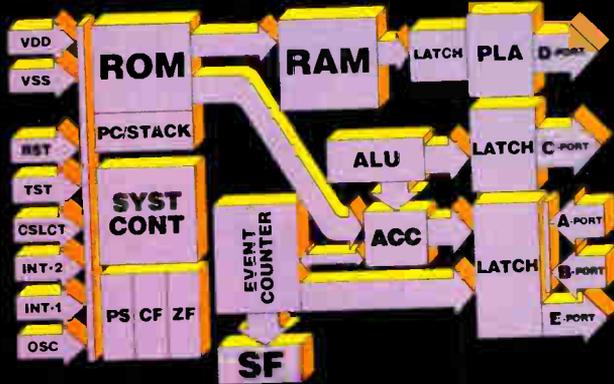

Now Panasonic offers you a whole family of TTL compatible, one-chip microcomputers. So you can choose the combination of features and capabilities that are most cost-effective for your application. From appliances to gas pumps and electronic scales, to copiers, POS and intelligent terminals, tractor controls and countless others.

Why pay for costly I/O interfacing when Panasonic puts it all on the chip?

Our MN1400 family is ideally suited for control functions with its extensive array of on-chip I/O facilities. There's an 8-bit, presetable counter/timer, a clock generator, an arithmetic logic unit, and several input and output ports. Units are available with a self-contained 1024x8-bit ROM and a 64x4-bit RAM memory.

Still more flexibility and efficiency from Panasonic.

For flexibility, our instruction set contains up to 75 instructions. To give you TTL compatibility, all our family members operate on +5V. And for extra computing speed, we've utilized N-channel E/D MOS construction.

Panasonic can help you cut development time and costs.

Our Evaluator, the MN1499, can help you design, evaluate and debug programs quickly. In addition, software is available for a number of applications.

The Panasonic family of one-chip microcomputers.

Package	MN1400 40-Pin Plastic DIP	MN1402 28-Pin Plastic DIP	MN1498 40-Pin Plastic DIP	MN1499 64-Pin Ceramic DIP
Power Supply	+5V	+5V	+5V	+5V
Instruction Cycle Time		10 μ s	10 μ s	10 μ s
Instruction Set	75	57	68	75
Instruction Memory	Internal: 1024 x 8 bits (8192 bits)	Internal: 768 x 8 bits (6144 bits)	External: 1324 x 8 bits (8192 bits)	External: 2048 x 8 bits (16384 bits)
	Total on Chip RAM	64 x 4 bits (256 bits)	32 x 4 bits (128 bits)	64 x 4 bits (256 bits)

16-bit microprocessors, too.

They're ideally suited for a wide variety of computer peripheral and business machine applications. Designed with minicomputer architecture LOCOS MOS-N-channel construction for optimum speed and thrupt efficiency.

For complete information and prices, write to Panasonic Electronic Components, One Panasonic Way, Secaucus, N.J. 07094; or call (201) 348-7269.

Panasonic[®]
just slightly ahead of our time

Circle 185 on reader service card

THE NEW DIT-MCO SERIES 8210 AUTOMATIC WIRE CIRCUIT ANALYSIS SYSTEMS



A CHOICE... FLEXIBLE, EXPANDABLE, POWERFUL SOFTWARE/HARDWARE TEST SYSTEM PACKAGES

Obsolete is Obsolete...

The DIT-MCO Series 8210, comprised of systems 8211, 8212, and 8213, offers the most complete package of automatic wire circuit test capabilities available to serve your present and continuing test needs. In fact, Series 8210 obsoletes the word obsolete. You can select the system to fit your current test requirements with certain knowledge that as your needs expand your DIT-MCO system can be upgraded to deliver!

Powerful Software/Hardware...

Series 8210 are real-time disc operating systems with disc file maintenance in the system. Series 8210 systems are driven by fully interactive computer systems yet require no specialized operator training. A unique and comprehensive group of programs for testing, maintenance, and diagnostics are standard. Software is the evolutionary culmination of over five years experience and proven field use.

Eeny, Meeny, Miney...

You get a choice...to fit your budget. To fit your test needs. You get versatility, flexibility, the ability to expand and adapt.

And remember, when you choose DIT-MCO you have chosen Number One.

Too New to be Copied...

So new you won't find anything like it available anywhere else.

System 8210 incorporates all the "state of the art" advancements with some new wrinkles only DIT-MCO could provide.

So if you are going to look around for a comparison you will just have to compare the systems within the 8210 Series. None of the others come close.

Hand in Hand...

When you select DIT-MCO equipment you have bought not only the hardware and software you also get the Company...our over 25 years leadership in the field, our just reputation for treating every customer, big or small, with the same respect and dedicated service. With DIT-MCO you get it all!

Call or Write for Full Information...

A DIT-MCO representative can show you how Series 8210 or any of our complete line of interconnect test systems can accommodate your test requirements. Call or write us for full information.

DIT-MCO — The Difference in Testing...

DIT-MCO INTERNATIONAL

5612 Brighton Terrace
Kansas City, Missouri 64130
Telephone (816) 444-9700
Telex Number 42-6149



European Technical
Representative
Radix House
Central Trading Estate
Staines, Middlesex, TW18-4-XA
England
Telephone (0784) 51444
Telex Number 935023

New products

as a root-mean-square-responding power meter over the frequency range from 200 hertz to 4.5 megahertz. In its selective mode, it offers bandwidths of 500 Hz and 1.74 kilohertz over the range from 2 kHz to 4.5 MHz. An optional 25-Hz filter extends the range down to 200 Hz.

The system's 9003 noise loader is a simplified version of the Wandel and Goltermann RS-50 white noise source, manufactured in the U. S. by W & G Instruments. It provides a flat noise output across the band from 6 kHz to 12.5 MHz, band-limited by selectable plug-in filters. In addition to two band-limiting filters, the 9003 can accommodate three plug-in band-stop filters and a pre-emphasis network.

Supplied complete with a roll-about cart, the RBTS sells for \$5,355 without filters and about \$6,600 including filters for a 300-channel communications system.

W & G Instruments Inc., 119 Naylor Ave., Livingston, N. J. 07039. Phone (201) 994-0854 [401]

32-channel instrument analyzes telephone noise

Designed to monitor up to 32 telephone lines, the db-621A multichannel distribution analyzer is a stand-alone instrument for the determination of amplitude distribution functions for periods that last up to 99 hours. The unit samples each channel 10 times a second, converts the analog sample into a 6-bit binary number, determines which of 64 possible levels that number represents, and adds one count to the register associated with that level. The instrument can thus automatically scan its registers and generate



The Mallory Capacitor Help-Force.

Everything to make buying easier for you.

The Help-Force is what we call our expanded product, sales and full-service organization. It's organized to make your job easier and free you from time-consuming details in getting the capacitors you need.

Now you can place your large or customized orders with our OEM direct sales force. Or get immediate off-the-shelf delivery through our authorized Mallory distributors.

Whichever way you choose, use our

headquarters services, too, to get the status of your production order at the same time; or on-the-phone price and delivery quotations. And if you have unusual applications, call our product managers. They can recommend the right capacitors to meet your needs.

The Mallory Help-Force can help you on a worldwide basis, too. We have distributors almost everywhere. So if you buy capacitors for overseas manufacturing, let us fill your needs either by direct shipment or through an authorized Mallory distributor.

Let the Mallory Help-Force take some of the weight off your shoulders. Call your local Mallory sales representative. Or Help-Force headquarters at (317) 856-3731. Mallory Capacitor Company, a division of P. R. Mallory & Co. Inc. Box 1284, Indianapolis, Indiana 46206.



MALLORY

DELEVAN

DEPENDABILITY

DOESN'T COST

There's a lot more than meets the eye in Delevan's lineup of miniature RF inductors and transformers. Like the unmatched dependability built into each component. Thanks to a lot of things that go on at the factory. Hard-nosed quality controls . . . complete material analysis . . . advanced in-plant environmental testing . . . automated techniques for winding, soldering and molding . . . and conscientious people who take pride in true "no-fault" production. And of course, the dependable delivery and service you always get from Delevan.

IT PAYS

Remember . . . the proven reliability of these superior made-in-U.S.A. inductive devices means greater reliability for the products and assemblies *made from them*. Sure, you can save a few pennies by using cheaper components. But this could be expensive in terms of premature failure of the finished product. When your company's reputation is on the line, you can't afford *not to use* Delevan components. Their premium performance more than justifies their use . . . because Delevan dependability pays for itself. Why not prove it to *yourself!*

Delevan
Division



AMERICAN PRECISION INDUSTRIES INC.

270 QUAKER RD./EAST AURORA, N.Y. 14052
TELEPHONE 716/852-3800 TELEEX 081-293
OTHER DIVISIONS OF AMERICAN PRECISION INDUSTRIES INC.
BASCO • DUSTEX • MOELLER INSTRUMENT CO • OXFORD CORP

New products

a distribution function plot (histogram) for the test period. It can also compute and display the long-term root-mean-square level for any channel at any time during the test. Data is displayed on a six-digit light-emitting-diode readout, or it can be printed on an accessory column printer. Alternatively, the data can be converted to analog form and plotted on an XY recorder.

Metrosonics Inc., P. O. Box 18090, Rochester, N. Y. 14618. Phone (716) 442-0760 [403]

Acoustic coupler kit
sells for \$130

The Pennywhistle 103 acoustic coupler kit provides half- or full-duplex data communications using ordinary telephones. The kit sells for \$129.95



plus \$3.50 for postage and handling (plus 6½% sales tax in California) and has a delivery time of four weeks. A three-stage active filter on the modem eliminates problems caused by harmonics of the signaling frequencies.

M & R Enterprises, P. O. Box 61011, Sunnyvale, Calif. 94088. Phone (408) 738-3772 [404]

Multiplexer puts 31 signals
onto one voice channel

A microprocessor-based analog multiplexing system that accommodates up to 31 independent signals delivers analog outputs at its receiving station with an error of no more than 0.35% of full scale. Connection between the transmitting station and the receiver is by means of a single


Four very small ways to improve on your PC design.

With four types of switches—rockers, pushbuttons, toggles and DIPs—Cutler-Hammer offers one of the industry's broadest and most unique selections of PC subminiatures.

Each of the hundreds of available styles provides the reliability you've come to expect from Cutler-Hammer. With ratings to 6 amps, each conforms to standard circuit board mounting requirements.

PC switches, along with accessories and decorative hardware, are distributor stocked for local availability. And since most are manufactured in the United States, we offer fast reaction time on solder lug and wire wrap terminal variations, as well.

To improve your next design in any number of small ways, contact your Cutler-Hammer Sales Office or Switch Distributor.

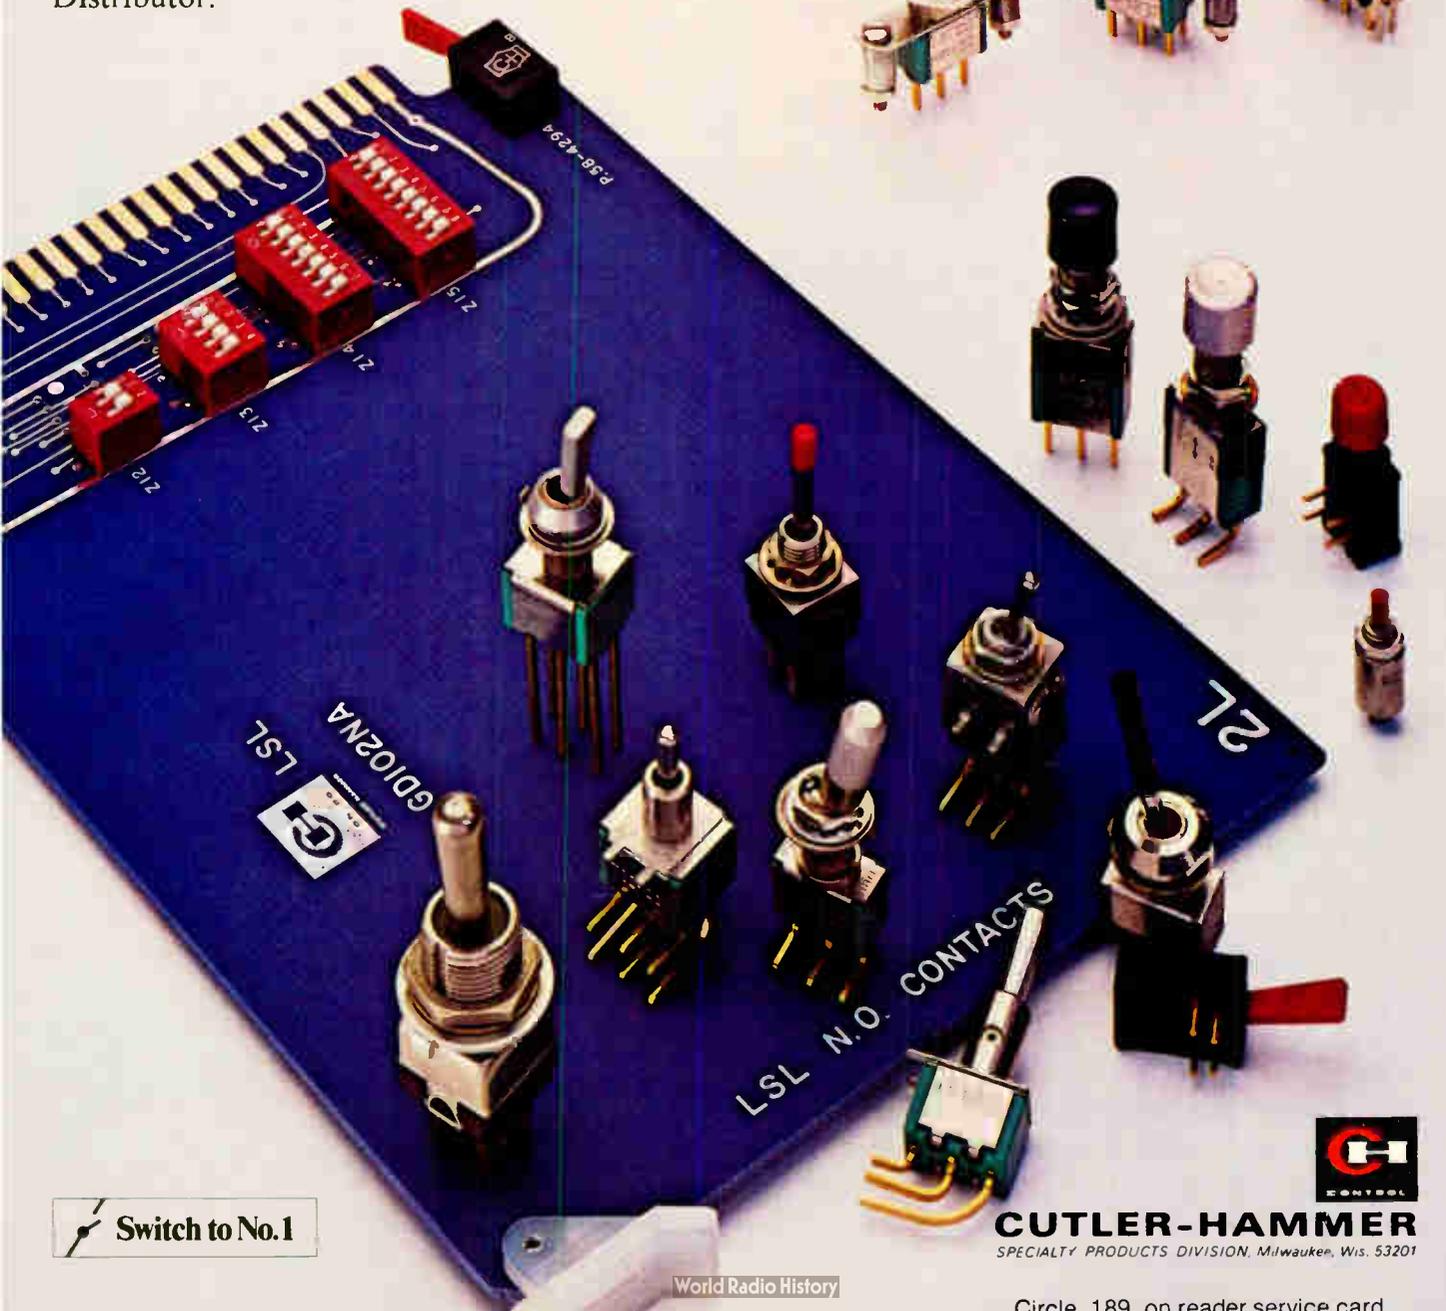

 Switch to No.1

World Radio History


CUTLER-HAMMER
SPECIALTY PRODUCTS DIVISION, Milwaukee, Wis. 53201

Circle 189 on reader service card

IWATSU'S NEW 15MHz DUAL-TRACE OSCILLOSCOPE FOR MULTIPURPOSE APPLICATIONS



As a leading supplier for a wide range of high quality test and measuring instruments — such as an Oscilloscope (350 MHz real-time, 18 GHz sampling), a Logic Scope (8 channels, 100 MHz clock frequency), a Digital Memoroscope (10 ns/word writing speed) and a Frequency Counter (550 MHz) — Iwatsu presents this newly developed multi-purpose Oscilloscope SS-5212 utilizing a lower frequency band. The SS-5212 provides a host of features that cannot be compared with those oscilloscopes in the same frequency band class.

- Features:
1. Single sweep with variable illumination
 2. 1 mV/div at dual-trace (7 MHz)
 3. Alternate trigger
 4. Trigger hold-off
 5. High sensitivity X-Y (1 mV/div)

- | | |
|---|--|
| <ul style="list-style-type: none"> ● New Digital Memoroscope DMS-510 1. 10 MHz scope with a memory of 8 bit x 1 k, 1 μs/word 2. Dual-display (memory + real-time) 3. Pre-trigger display | <ul style="list-style-type: none"> ● New 250 MHz scope SS-5321 1. Bright and sharp display 2. 3-trace display 3. Alternate sweep 4. Enhanced function |
|---|--|


Visit our booths 1119 and 1121 at MIDCON/77



IWATSU ELECTRIC CO., LTD.

(IWASAKI TSUSHINKI K.K.)
 ASAHISEIMEI BLDG., 1-3, NIHONBASHI 2-CHOME, CHUO-KU,
 TOKYO, 103 JAPAN TEL: TOKYO (272) 0461
 CABLE ADDRESS: TELEPHIWATSU TELEX: J24225 TELEIWA

New products

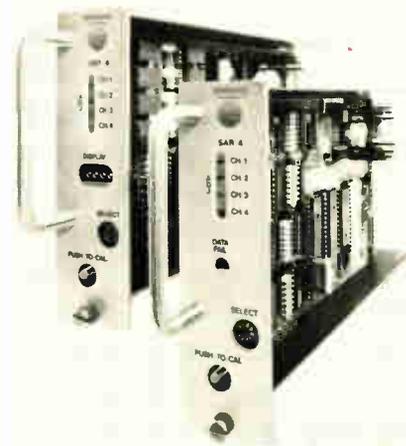



voice channel. The system is modular, being built up from one-, two-, three-, and four-channel transmitter and receiver modules. A basic one-channel system sells for \$650, while a four-channel setup goes for \$1,125. Thus a 31-channel system would sell for something approaching \$9,000. For complete details, ask for PDS-480.

Sparling Division, Envirotech Corp., 4097 N. Temple City Blvd., El Monte, Calif. 91731. Phone (213) 444-0571 [405]

Data monitor operates up to
100,000 bits per second

The Epiview data-communications line monitor is an inexpensive instrument that accepts full-duplex data in either synchronous or asynchronous modes at rates up to 100,000 bits per second. In its standard configuration, Epiview displays data on an integral 5-inch cathode-ray tube, with selected segments highlighted by character blinking or reverse imaging. In addition to providing a real-time display, the unit can be

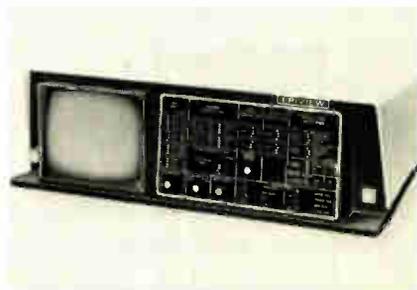

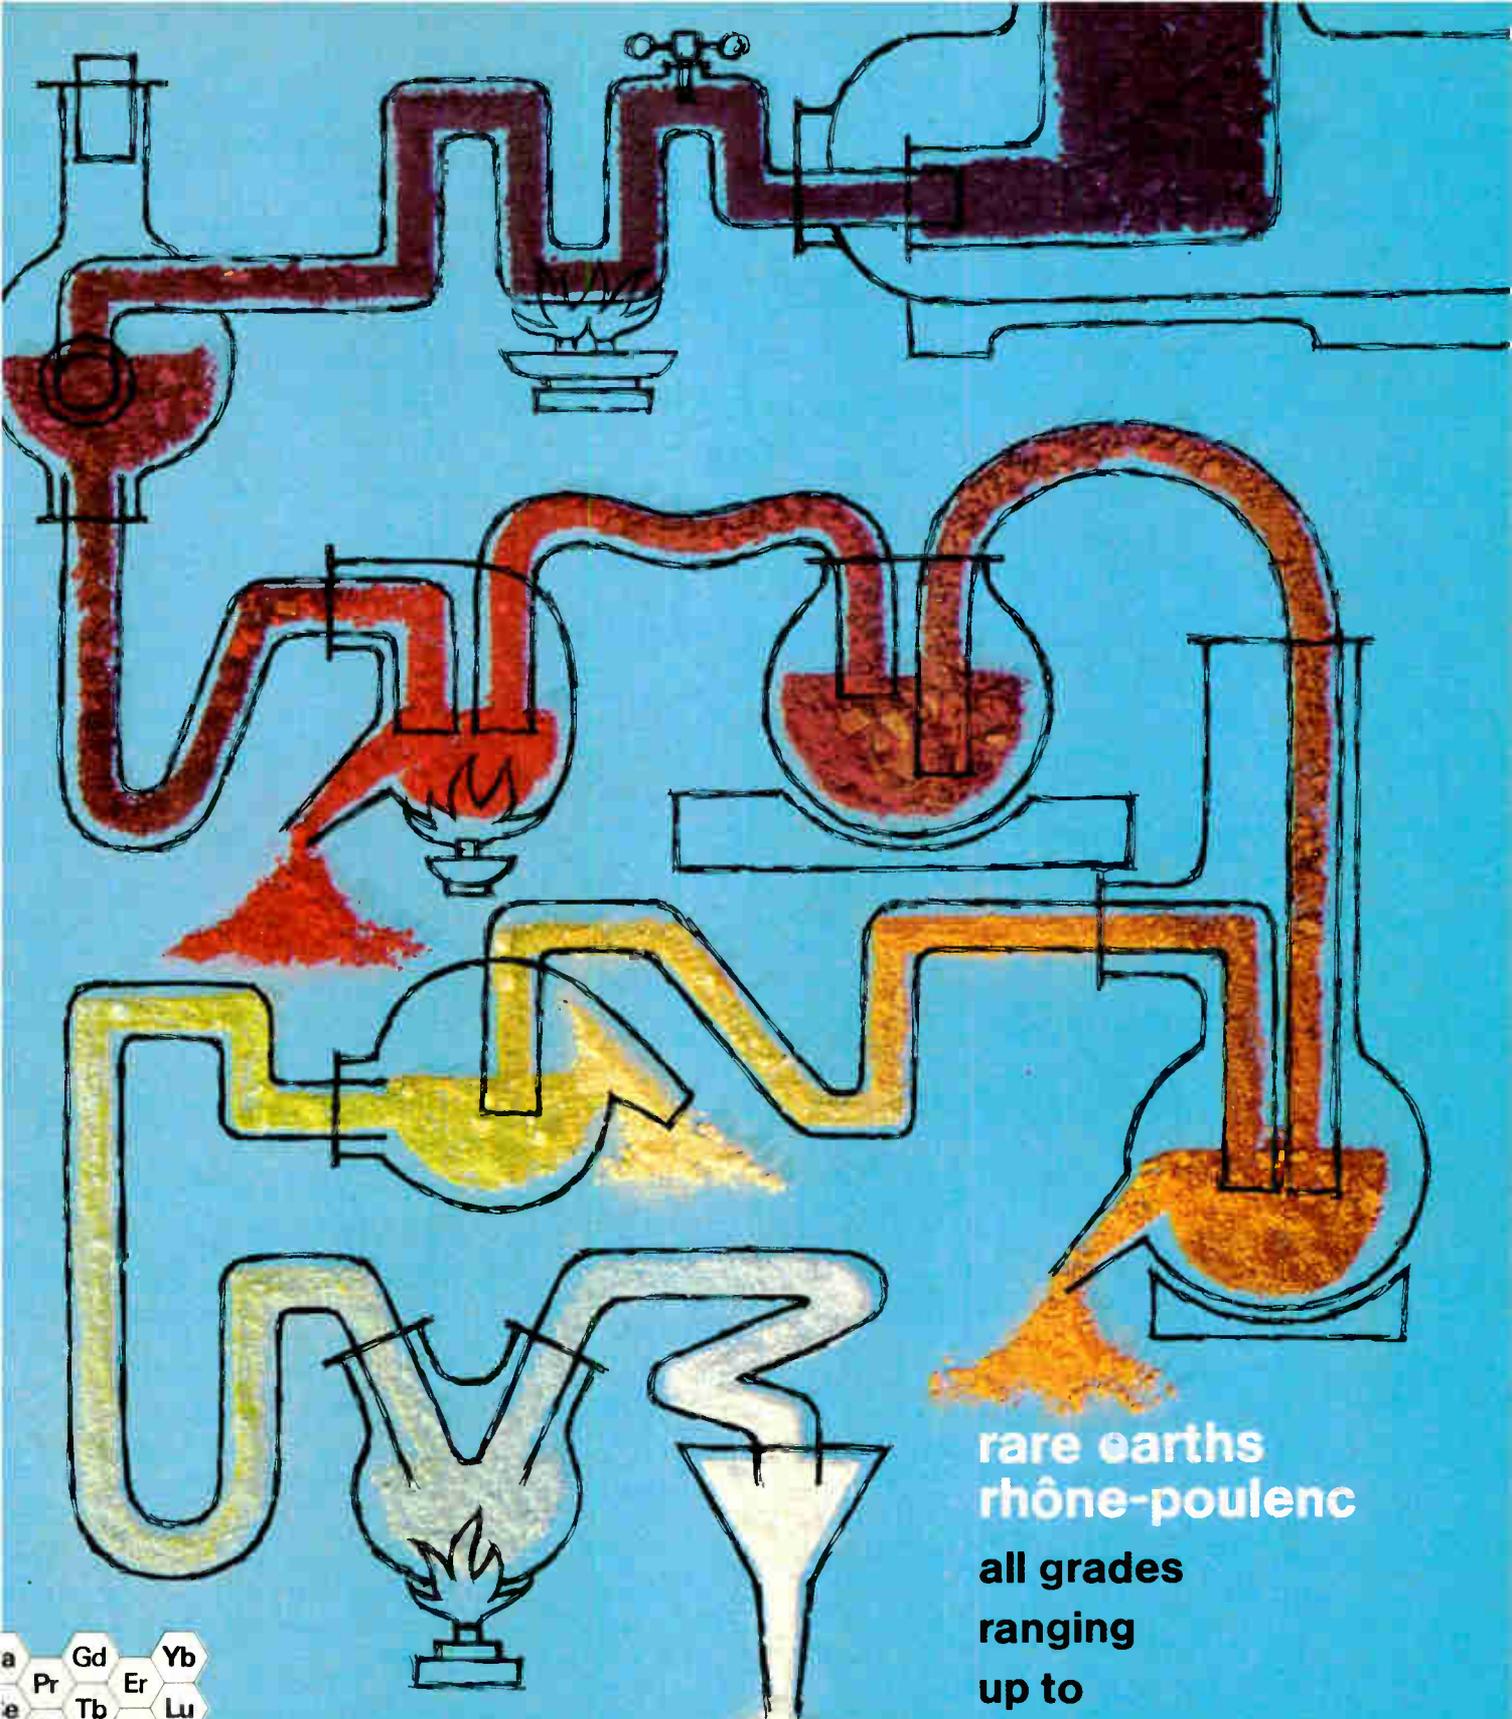

rare earths
 rhône-poulenc
 all grades
 ranging
 up to

99,9999% purity

	Gd	Yb
Pr	Er	Lu
Tb		
Nd	Tm	
Dy		
Sm	Ho	Th
Eu		

for further information, please send your name and address with the reference : **G.7.30**

U.S.A.
rhône-poulenc inc
 Chemicals Division - P.O. Box 125, Monmouth Junction, NEW JERSEY 08852 (USA), Tel. 201-846-7700, Telex 844527
 other countries

rhône-poulenc (CF/PSP) 21, rue J. Goujon, F-75 360 PARIS CEDEX 08, Tel. (1) 256-40 00, Telex 640 100 F



World Radio History

Circle 191 on reader service card

1977 Answer Book.

It makes your job easier. \$25.

"WHO MAKES WHAT?"

"WHERE ARE THEIR NEAREST SALES OFFICES?"

"WHO ARE THEIR DISTRIBUTORS?"

"WHAT COMPANIES MAKE THE PRODUCTS I NEED?"
(See alphabetical directory of 4000 products)

"WHAT ARE THEIR LOCAL PHONE NUMBERS?"
(See alphabetical directory of over 5000 manufacturers)

"HOW CAN I GET THEIR CURRENT CATALOGS FAST?"
(See directory of catalogs by product and by company, including catalog inquiry cards for 5-second ordering)

"WHO MANUFACTURES THIS TRADE NAME?"
(See Directory of Trade Names)

Electronics Buyers' Guide
1221 Avenue of the Americas
New York, N.Y. 10020



Yes, send me a copy of Electronics Buyers' Guide. I've enclosed \$25 (USA and Canada only, elsewhere send \$35). Full money back guarantee if returned within 10 days.

Name

Company

Street

City State Zip

New products

connected to an Epitape recorder, which stores data for later analysis. A single Epiview instrument sells for \$3,300.

Epicom Inc., 592 N. Douglas Ave., Altamonte Springs, Fla. 32701. Phone Roy Ostrander at (305) 869-5000 [406]

Fast-synchronizing modem runs at 1,200 and 2,400 b/s

The 2400 LSI data modem is a fast-synchronizing device intended for operation at 1,200 and 2,400 bits per second over two- or four-wire dedicated lines or over the dial-up network. Its fast synchronization suits it well for applications in multi-station polled networks and point-to-point communications. Built-in local digital and analog loopback diagnostic capabilities reduce the time required to localize system malfunctions. To further simplify its use, a built-in test-pattern generator and receiver pattern detector are included for both installation and troubleshooting. No external test




equipment is required to install or troubleshoot the modem.

When operating over the direct distance dial network, automatic answer circuits enable unattended call answering if a type CBS or CBT data coupler is used. In the auto answer mode, an answer tone of 2,025 hertz is generated for 3 seconds to switch over type 801 devices or to alert manual calling stations of call completion, depending on the application. In singles, the dedicated-line version of the 2400 LSI sells for \$789.

Penril Corp., 5520 Randolph Rd., Rockville, Md. 20852. Phone (301) 881-8151 [407]

LAMBDA

EXPANDS LN SERIES POWER SUPPLIES WITH TWO NEW DUAL OUTPUT MODELS.

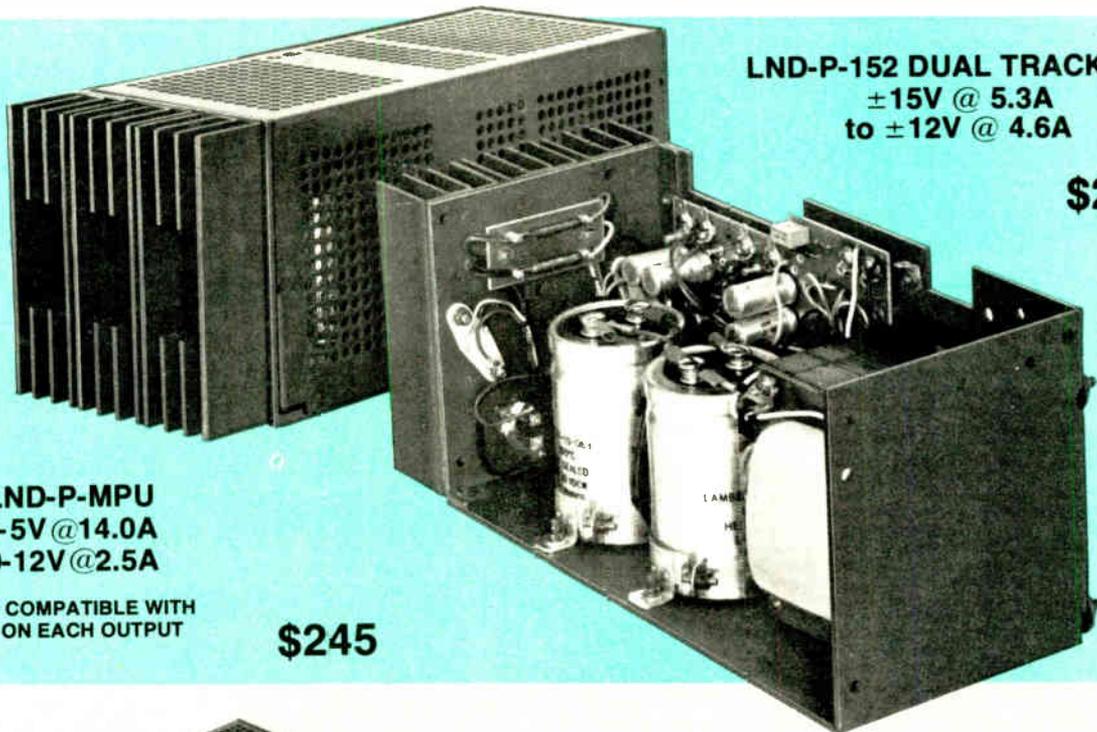


LND-P-152 DUAL TRACKING
±15V @ 5.3A
to ±12V @ 4.6A

\$240

LND-P-MPU
+5V @ 14.0A
9-12V @ 2.5A

MPU COMPATIBLE WITH
OV ON EACH OUTPUT

\$245

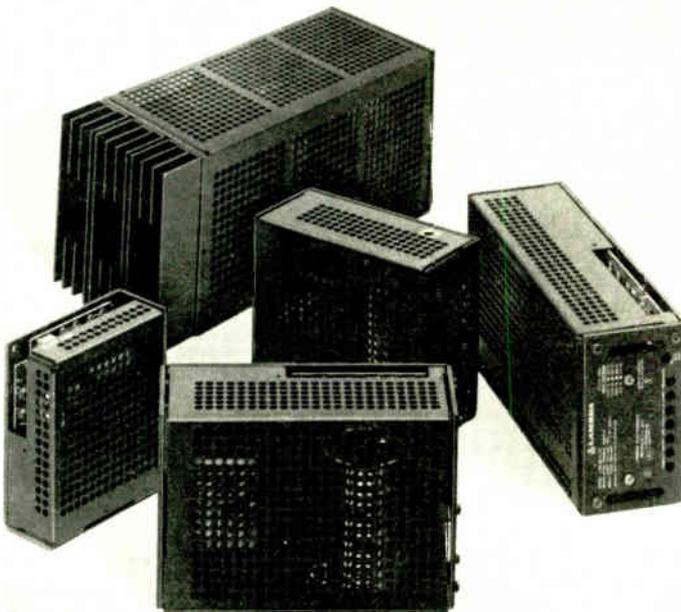


Guaranteed 5 years

Now: 5 Package Sizes

- 42 Single, Dual and MPU Models
- Up to 28 Volts. Up to 22 Amps
- Meet MIL STD-810C requirements
- Listed in UL recognized component index
- Designed to meet VDE Specs.
- For OEM, Industrial and Military applications.

"All LN Series Power Supplies can be used
with or without cover."

LN series power su OEM, industrial and

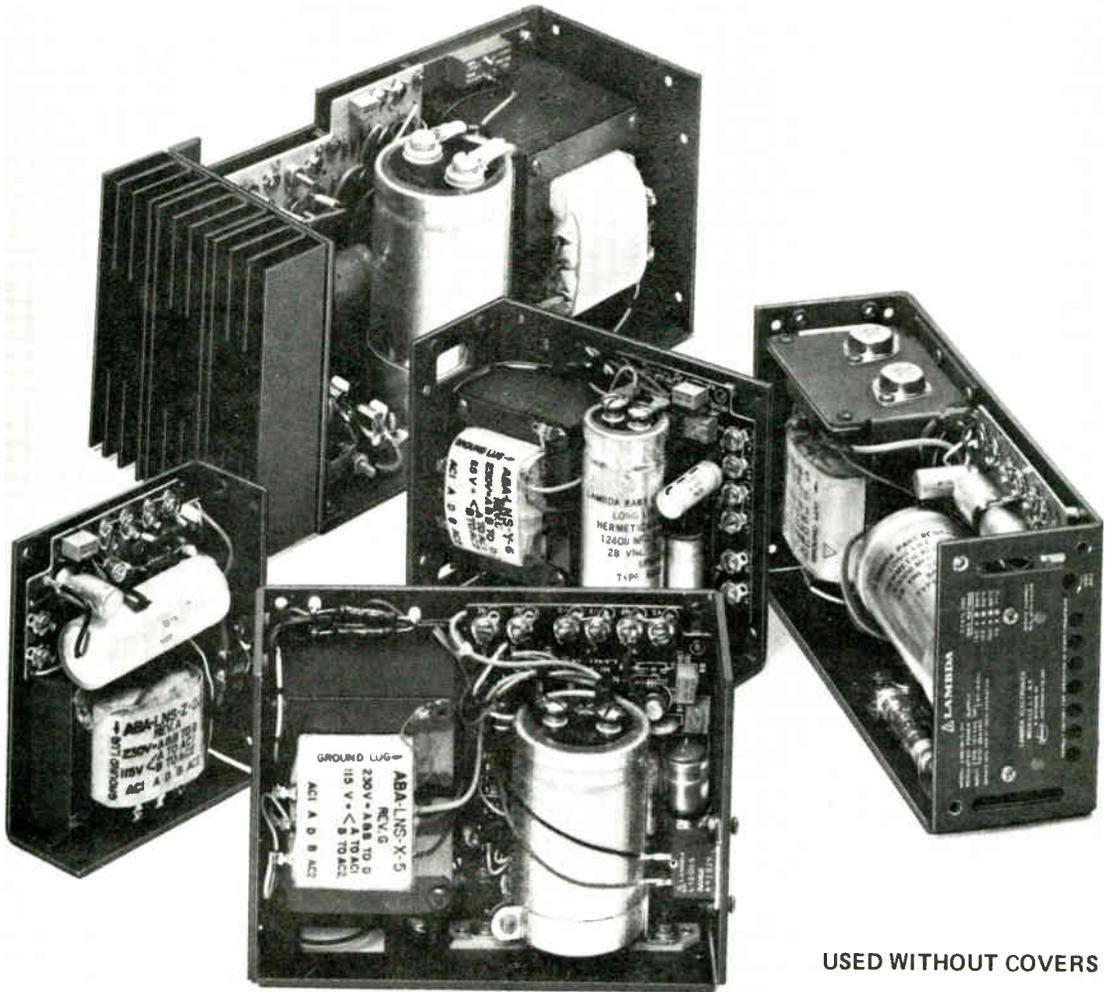

USED WITHOUT COVERS

5 Package Sizes, 40 Models

Single, Dual, — mpu
compatible models
up to 28 volts
up to 22 amps

Regulation

line and load — 0.1%

Ripple and Noise

1.5 mV rms, 5mV pk-pk

Dual Input

105-127 VAC, 47-440 Hz.
210-254 VAC, 47-440 Hz

**Designed for Listing in UL
Recognized Component Index**

Tested and Meets All These MIL STD-810C Requirements

- Low Temperature . . . Method 502.1 Procedure I
- High Temperature . . . Method 501.1 Procedure I & II
- Low Pressure Method 500.1 Procedure I
- Humidity Method 507.1 Procedure I & II
 - Temperature — Altitude Method 502.1 Procedure I Class 2 (0°C operating)
- Vibration Method 514.2 Procedure X, XI
- Shock Method 516.2 Procedure I
- Temperature Shock . . Method 503.0 Procedure I
- Fungus Method 508.1 Procedure I

and guaran

plies designed for military applications



New Monolithic and Hybrid OV
overvoltage protection standard
on 5V models — available as
an option on other models

**Designed to Meet
VDE Specs.**

Isolation Resistance
10 Meg ohms

Isolation Voltage
input to output — 4000V

**Thermally Engineered
Ventilation Holes**

Convection Cooled
no external heatsinks or
blowers necessary

Mounting
3 positions; 3 surfaces

Fungus Proof
No fungus nutrient material used

Shipped Complete with Cover
can be used with and
without cover, depending
on your application

teed 5 years

Lambda I designed for min

△ LAMBDA
**MIL-T-27C
Grade 6 Transformer**
layer-wound with electrostatic shield

MIL-W-16878 Wire

△ LAMBDA
**Perforated 0.075 inch
Thick Steel Cover**


Thermostat - automatically
resets when overtemperature
condition is eliminated

Sprague 602D high temperature,
premium computer grade hermetically
sealed electrolytic capacitor


△ LAMBDA
LAS-1100
monolithic voltage
regulator (TO-96)

Sprague 601D, 672D
high temperature, long life
electrolytic capacitors

△ LAMBDA
CC4®* Printed Circuit Board
plated thru-holes
fungus inert, flame retardant

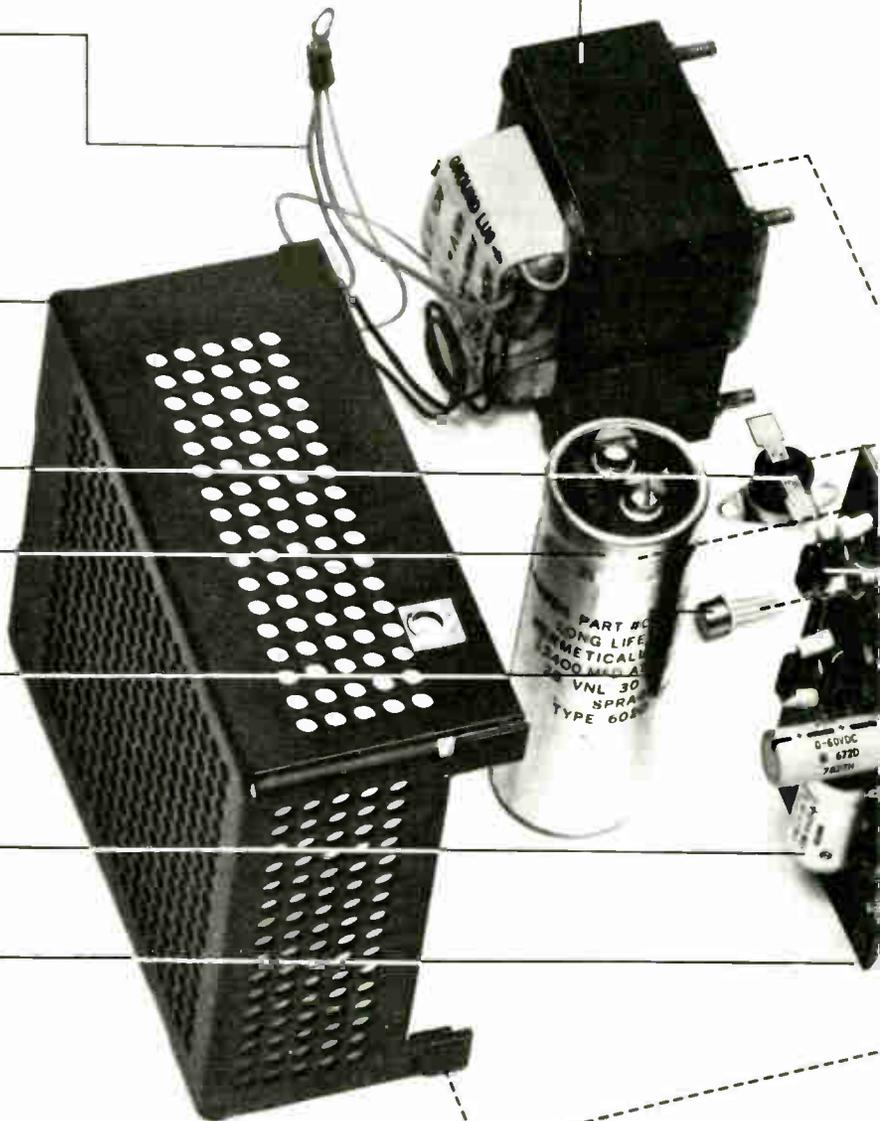

.N Series Minimum repair time

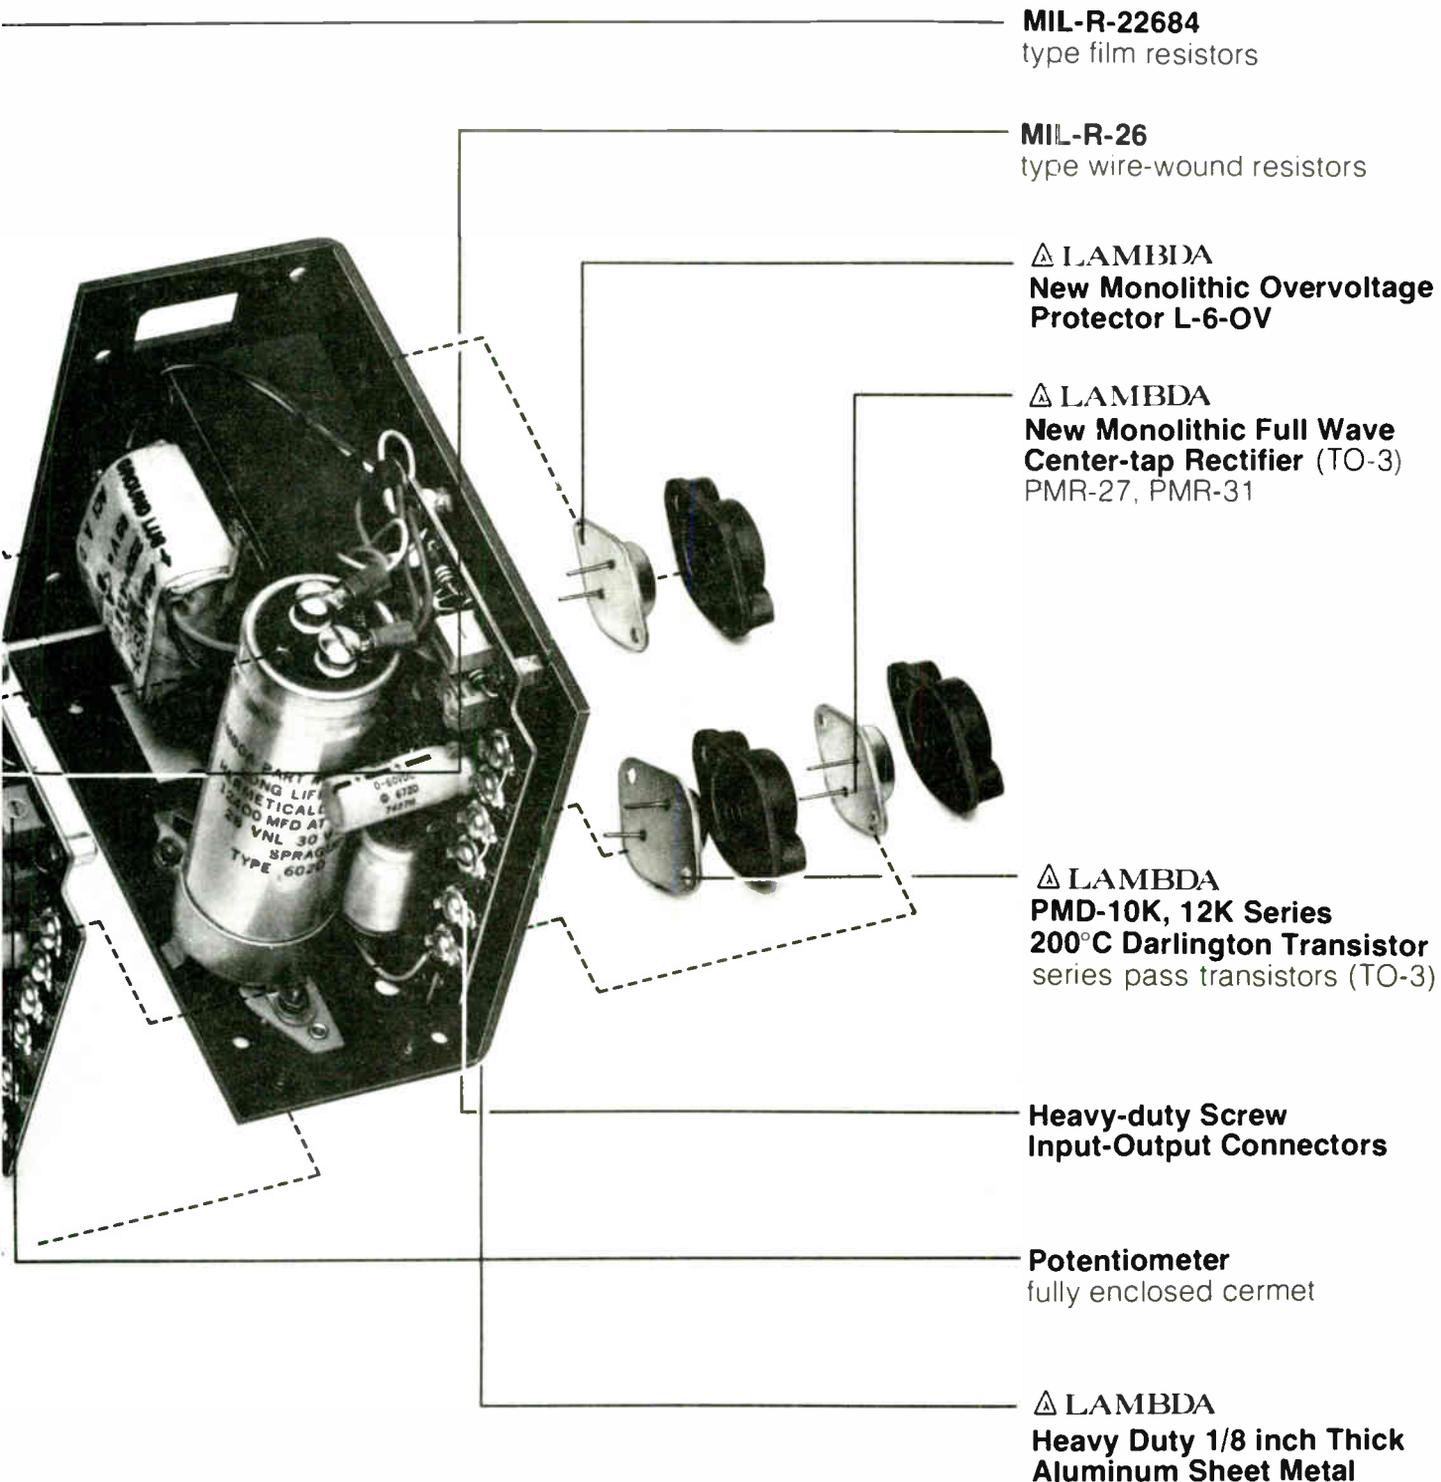

VOLTAGE AND CURRENT RATINGS

DUAL OUTPUT

5 VOLTS ± 5% ADJ, 9V-12V ADJ

MODEL	REGULATION (LINE OR LOAD)	RIPPLE (RMS)	VOLT. VDC.	⁽¹⁾ MAX CURRENT AMPS AT				PKG SIZE	DIMENSIONS ⁽²⁾ (INCHES)	PRICE
				40°C	50°C	60°C	71°C			
LND-X-MPU (3)	0.1%	1.5	5±5% 9-12	7.0(5.95) 1.2(1.02)	6.0(5.11) 1.1(0.94)	4.7(4.0) 1.0(0.85)	3.2(2.72) 0.8(0.68)	X	7 x 4 7/8 x 2 7/8	\$172
LND-P-MPU (3)	0.1%	1.5	5±5% 9-12	14.0(13.3) 2.5(2.38)	12.2(11.59) 2.2(2.09)	10.0(9.5) 1.8(1.71)	7.5(7.13) 1.35(1.28)	P	11 x 4-7/8 x 4-13/32	245

± 15 VOLTS TO ± 12 VOLTS ADJ

DUAL TRACKING

MODEL	REGULATION	RIPPLE	VOLT.	⁽¹⁾ MAX CURRENT AMPS AT				PKG SIZE	DIMENSIONS ⁽²⁾ (INCHES)	PRICE
				40°C	50°C	60°C	71°C			
LND-Z-152	0.15%	1.5	±15 to ±12	0.6(0.54) 0.6(0.54)	0.55(0.5) 0.55(0.5)	0.45(0.41) 0.45(0.41)	0.3(0.27) 0.3(0.27)	Z	4 7/8 x 4 x 1 3/4	\$ 85
LND-Y-152	0.1%	1.5	±15 to ±12	1.4(1.20) 1.2(1.02)	1.2(1.02) 1.1(0.94)	0.9(0.77) 0.8(0.68)	0.6(0.51) 0.5(0.43)	Y	5 5/8 x 4 7/8 x 2 5/8	120
LND-X-152	0.1%	1.5	±15 to ±12	2.5(2.13) 2.3(1.96)	2.1(1.79) 1.9(1.62)	1.6(1.37) 1.4(1.2)	1.1(0.94) 0.9(0.77)	X	7 x 4 7/8 x 2 7/8	150
LND-W-152	0.1%	1.5	±15 to ±12	3.3(3.0) 3.1(2.8)	3.1(2.8) 2.8(2.52)	2.6(2.34) 2.3(2.07)	2.0(1.8) 1.6(1.44)	W	9 x 5 x 2 7/8	170
LND-P-152	0.1%	1.5	±15 to ±12	5.3(5.04) 4.6(4.37)	4.7(4.47) 4.0(3.80)	3.9(3.71) 3.3(3.14)	2.9(2.76) 2.5(2.38)	P	11 x 4-7/8 x 4-13/32	240

5 VOLTS ± 5% ADJ

SINGLE OUTPUT

MODEL	REGULATION (LINE OR LOAD)	RIPPLE (RMS)	40°C	⁽¹⁾ MAX CURRENT AMPS AT				PKG SIZE	DIMENSIONS ⁽²⁾ (INCHES)	PRICE
				50°C	60°C	71°C				
LNS-Z-5-OV	0.15%	1.5	3.0(2.7)	2.7(2.4)	2.3(2.1)	1.7(1.5)	Z	4-7/8 x 4 x 1-3/4	\$ 80	
LNS-Y-5-OV	0.1%	1.5	6.0(5.4)	5.1(4.6)	4.2(3.8)	3.1(2.8)	Y	5-5/8 x 4-7/8 x 2-5/8	115	
LNS-X-5-OV	0.1%	1.5	10.0(8.5)	8.9(7.6)	7.3(6.2)	5.3(4.5)	X	7 x 4-7/8 x 2-7/8	140	
LNS-W-5-OV	0.1%	1.5	14.0(11.9)	12.2(10.4)	10.0(8.5)	7.5(6.4)	W	9 x 5 x 2-7/8	175	
LNS-P-5-OV	0.1%	1.5	22.0(20.9)	19.5(18.53)	16.5(15.68)	13.0(12.35)	P	11 x 4-7/8 x 4-13/32	220	

6 VOLTS ± 5% ADJ

LNS-Z-6	0.15%	1.5	2.5(2.25)	2.2(2.0)	1.9(1.7)	1.4(1.3)	Z	4-7/8 x 4 x 1-3/4	\$ 75
LNS-Y-6	0.1%	1.5	5.6(5.0)	4.9(4.4)	4.0(3.6)	2.9(2.61)	Y	5-5/8 x 4 7/8 x 2-5/8	110
LNS-X-6	0.1%	1.5	9.5(8.1)	8.4(7.15)	7.1(6.0)	5.0(4.25)	X	7 x 4-7/8 x 2-7/8	130
LNS-W-6	0.1%	1.5	13.0(11.0)	11.2(9.5)	9.3(7.9)	6.8(5.9)	W	9 x 5 x 2 7/8	165
LNS-P-6	0.1%	1.5	20.5(19.48)	18.1(17.2)	15.3(14.54)	12.0(11.4)	P	11 x 4-7/8 x 4-13/32	200

12 VOLTS ± 5% ADJ

LNS-Z-12	0.15%	1.5	1.7(1.55)	1.6(1.45)	1.5(1.4)	1.3(1.2)	Z	4-7/8 x 4 x 1-3/4	\$ 75
LNS-Y-12	0.1%	1.5	4.0(3.6)	3.5(3.15)	2.9(2.6)	2.2(2.0)	Y	5-5/8 x 4-7/8 x 2-5/8	110
LNS-X-12	0.1%	1.5	6.5(5.5)	5.5(4.7)	4.5(3.8)	3.3(2.8)	X	7 x 4 7/8 x 2-7/8	130
LNS-W-12	0.1%	1.5	8.5(7.2)	7.2(6.1)	5.9(5.0)	4.2(3.6)	W	9 x 5 x 2-7/8	165
LNS-P-12	0.1%	1.5	14.0(13.3)	12.4(11.8)	10.0(9.5)	7.3(6.94)	P	11 x 4-7/8 x 4-13/32	200

15 VOLTS ± 5% ADJ

LNS-Z-15	0.15%	1.5	1.4(1.3)	1.3(1.62)	1.2(1.1)	1.0(0.9)	Z	4-7/8 x 4 x 1-3/4	\$ 75
LNS-Y-15	0.1%	1.5	3.4(3.1)	3.1(2.8)	2.6(2.35)	2.0(1.8)	Y	5-5/8 x 4-7/8 x 2-5/8	110
LNS-X-15	0.1%	1.5	5.5(4.7)	4.8(4.1)	3.9(3.35)	2.8(2.4)	X	7 x 4-7/8 x 2-7/8	130
LNS-W-15	0.1%	1.5	7.7(6.55)	6.7(5.7)	5.5(4.7)	3.8(3.15)	W	9 x 5 x 2 7/8	165
LNS-P-15	0.1%	1.5	12.0(11.4)	10.6(10.1)	8.5(8.1)	6.3(6.0)	P	11 x 4-7/8 x 4-13/32	200

20 VOLTS ± 5% ADJ

LNS-Z-20	0.15%	1.5	1.0(0.69)	0.85(0.77)	0.65(0.59)	0.45(0.41)	Z	4-7/8 x 4 x 1-3/4	\$ 75
LNS-Y-20	0.1%	1.5	2.7(2.45)	2.5(2.25)	2.0(1.08)	1.3(1.2)	Y	5-5/8 x 4 7/8 x 2-5/8	110
LNS-X-20	0.1%	1.5	4.4(3.75)	3.6(3.1)	2.6(2.2)	1.6(1.4)	X	7 x 4-7/8 x 2-7/8	130
LNS-W-20	0.1%	1.5	6.1(5.2)	5.2(4.4)	4.2(3.6)	3.0(2.6)	W	9 x 5 x 2 7/8	165
LNS-P-20	0.1%	1.5	10.0(9.5)	8.9(8.46)	7.5(7.13)	5.5(5.23)	P	11 x 4-7/8 x 4-13/32	200

24 VOLTS ± 5% ADJ

LNS-Z-24	0.15%	1.5	0.9(0.81)	0.75(0.68)	0.6(0.55)	0.4(0.36)	Z	4-7/8 x 4 x 1-3/4	\$ 75
LNS-Y-24	0.1%	1.5	2.3(2.1)	2.1(1.9)	1.7(1.5)	1.1(1.0)	Y	5-5/8 x 4-7/8 x 2-5/8	110
LNS-X-24	0.1%	1.5	3.8(3.25)	3.2(2.75)	2.4(2.0)	1.4(1.62)	X	7 x 4-7/8 x 2-7/8	130
LNS-W-24	0.1%	1.5	5.4(4.6)	4.6(3.9)	3.7(3.1)	2.5(2.1)	W	9 x 5 x 2-7/8	165
LNS-P-24	0.1%	1.5	9.0(8.55)	8.0(7.6)	6.7(6.37)	5.0(4.75)	P	11 x 4-7/8 x 4-13/32	200

28 VOLTS ± 5% ADJ

LNS-Z-28	0.15%	1.5	0.8(0.75)	0.65(0.6)	0.5(0.45)	0.35(0.32)	Z	4-7/8 x 4 x 1-3/4	\$ 75
LNS-Y-28	0.1%	1.5	2.0(1.8)	1.8(1.65)	1.5(1.35)	1.0(0.9)	Y	5-5/8 x 4-7/8 x 2-5/8	110
LNS-X-28	0.1%	1.5	3.4(2.9)	2.9(2.5)	2.2(1.5)	1.2(1.0)	X	7 x 4-7/8 x 2-7/8	130
LNS-W-28	0.1%	1.5	4.7(4.0)	4.0(3.4)	3.2(2.75)	2.2(1.9)	W	9 x 5 x 2-7/8	165
LNS-P-28	0.1%	1.5	8.0(7.6)	7.1(6.75)	6.0(5.7)	4.5(4.28)	P	11 x 4-7/8 x 4-13/32	200

- NOTE: 1. Rating in Parenthesis for LN Series when cover is used
 2. Dimensions include cover
 3. Includes OV protection on both outputs (5V OV trip point is 6.6 ± .2V fixed; 9-12V OV trip points is 13.7 ± .4V fixed)

SPECIFICATIONS OF LN SERIES

DC Output

Voltage range shown in tables

Regulated Voltage

regulation, line 0.1% (0.15% for LN-Z)
 regulation, load 0.1% (0.15% for LN-Z)
 ripple and noise 1.5mv RMS, 5mV pk-pk with
 either positive or negative terminal grounded.

temperature
 coefficient 0.03% /°C
 remote programming
 resistance 200 ohms per volt nominal
 remote programming
 voltage volt per volt

AC Input

line 105-127 VAC, 210-254 VAC
 (by transformer tap change)
 47-440 Hz. Consult factory for
 operation at frequencies other
 than 57-63 Hz.

Efficiency (Typical) . . . 30%-5V and 6V models, 42%
 12V and 15V models, 49%-20V,
 24V and 28V models. 42% for
 LN duals except LND-MPU
 which are 34%.

Ambient Operating Temperature Range

Continuous duty from 0° to +71°C with corresponding
 load current ratings for all modes of operation.

Storage Temperature Range

-55°C to 85°C

Overload Protection

Electrical

External overload protection, automatic electronic
 current limiting circuit limits the output current to a
 preset value, thereby providing protection for the load as
 well as the power supply.

Thermal

Thermostat – automatically reset when overtemperature
 condition is eliminated.

Overshoot

No overshoot on turn-on, turn-off or power failure.

Overvoltage Protection

Overvoltage protection module crowbars output when
 trip level is exceeded – standard on all 5V models and
 both outputs of models LND-X-MPU and LND-P-MPU.
 For other models see back cover.

Input and Output Connections

Heavy-duty screw terminals on printed circuit board.

DC Output Controls

Simple screwdriver adjustment over the entire voltage
 range.

Tracking Accuracy (Dual Tracking Models Only)

3% absolute voltage difference, 0.2% change for all con-
 ditions of line, load and temperature.

Remote Sensing

Provision is made for remote sensing to eliminate effect
 of power output lead resistance on DC regulation.

Mounting

Three Mounting surfaces, three mounting position. One
 mounting position for LN-P models.

Convection Cooled

No external heat sinking or forced air required.

Transformer

MIL-T-27C, Grade 6; Electrostatic shield; 4000 VAC
 input/output isolation.

Isolation Rating

Minimum 10 Megohm isolation from DC to ground at
 ground at 1000 VDC.

Fungus Proof

No fungi nutrient material used.

Military Specifications

The LNS series has passed the following tests in accor-
 dance with MIL-STD-810C.

- 1) Low Pressure – Method 500.1, Procedure I.
- 2) High Temperature – Method 501.1, Procedure I & II.
- 3) Low Temperature – Method 502.1, Procedure I.
- 4) Temperature Shock – Method 503.0, Procedure I.
- 5) Temperature – Altitude – Method 504.1, Procedure I.
 Class 2 (0°C operating)
- 6) Humidity – Method 507.1, Procedures I & II.
- 7) Fungus – Method 508.1, Procedure I.
- 8) Vibration – Method 514.2, Procedures X & XI.
- 9) Shock – Method 516.2, Procedures I & III.

MIL-I-6181D – Conducted and radiated EMI with one
 output terminal grounded.

Physical Data

Package Model	Weight		Size Inches
	Lbs. Net	Lbs. Ship	
LN-Z	3	3-1/4	4-7/8 x 4 x 1-3/4 (w/cover) 4-7/8 x 4 x 1-5/8 (w/o cover)
LN-Y	5	5-1/2	5-5/8 x 4-7/8 x 2-5/8 (w/cover) 5-5/8 x 4-7/8 x 2-1/2 (w/o cover)
LN-X	7-3/4	8-1/4	7 x 4-7/8 x 2-7/8 (w/cover) 7 x 4-7/8 x 2-3/4 (w/o cover)
LN-W	9	9-1/2	9 x 5 x 2-7/8 (w/cover) 9 x 4-7/8 x 2-3/4 (w/o cover)
LN-P	14	15-1/2	11 x 4-7/8 x 4-13/32 (w & w/o cover)
LND-P	15-1/2	17	11 x 4-7/8 x 4-13/32 (w & w/o cover)

Finish

Gray, Fed. Std. 595 No. 26081.

UL/VDE

Designed for listing in UL Recognized Components
 Index.

Designed for listing in VDE Index.

Accessories

Overvoltage protectors (standard on 5V models and
 models LND-X-MPU and LND-P-MPU).

Guaranteed for 5 Years

5-year guarantee includes labor as well as parts.
 Guarantee applies to operation at full published
 specifications at end of 5 years.

6 Amp Monolithic OV Protectors

\$5.00 Qty 1 \$3.40 Qty 1000

TO-3 PACKAGE, NO EXTERNAL COMPONENTS NEEDED

LAMBDA OVERVOLTAGE PROTECTORS L-6-OV, L-12-OV, L-20-OV, L-35-OV Series

General Description

The Lambda overvoltage protector prevents damage to the load caused by excessive power supply output voltage due to improper adjustment, improper connection, or failure of the power supply. Load protection is accomplished automatically by effectively short circuiting the output terminals of the power supply when a preset limit voltage has been exceeded. The trip-point limit voltage cannot be adjusted. To reset overvoltage protector, remove AC input to power supply allow overvoltage protector to cool, and reapply power.

Overvoltage Protector Performance Specifications

PARAMETER	SYMBOL	L-6-OV SERIES		L-12-OV SERIES		L-20-OV SERIES		L-35-OV SERIES	
		MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
On State Current	I_{DC}	-	6A	-	12A	-	20A	-	35A
On State Voltage	V_{DC}	-	2.5V	-	1.3V	-	1.4V	-	1.6V
Non-Repetitive Peak Surge Current*	I_p	-	70A	-	200A	-	260A	-	350A
Standby Current	I_S	-	25mA	-	5mA	-	5mA	-	5mA
Operating Temperature (Blocking)**	T_{CB}	-40°C	+100°C	-40°C	+100°C	-40°C	+100°C	-40°C	+100°C
Operating Temperature (Conducting)***	T_{CC}	-40°C	+150°C	-40°C	+140°C	-40°C	+140°C	-40°C	+140°C
Storage Temperature	T_S	-40°C	+150°C	-40°C	+125°C	-40°C	+125°C	-40°C	+125°C
Power Dissipation @ 25°C Derate @ 1.5W/°C above 50°C	P_D		150 Watts						
Thermal Resistance	$R_{\theta JC}$		1.0°C/W						

*For sinusoidal current duration of 8.3 milliseconds max.

**Case temperature for overvoltage protector in non-conducting or "OFF" state.



***Case temperature for overvoltage protector in conducting or "ON" state. Power must be removed and case temperature allowed to drop to 100°C before application of output voltage.

The overvoltage protector must be mounted on external heat sink to maintain case temperature below rated limit. When the overvoltage protector is used with a Lambda power supply, the power supply chassis acts as the heat sink. The L-12-OV, L-20-OV, L-35-OV, overvoltage protector is supplied with mating connectors for pins on overvoltage protector (+V and -V engraved on unit).

OVERVOLTAGE PROTECTORS

NOM SUPPLY VOLTAGE (VOLTS)	TRIP POINT VOLTAGE A (VOLTS)	6 AMP MODELS		12 AMP MODELS		20 AMP MODELS		35 AMP MODELS									
		QTY 1	PRICE QTY 100	QTY 250	PRICE QTY 100	QTY 250	PRICE QTY 100	QTY 250	PRICE QTY 100								
5	6.6 ± .2	L-6-OV-5	\$5	\$3.75	L-12-OV-5	\$11	\$8	L-20-OV-5	\$16	\$11.20	\$10.50	\$8.50	L-35-OV-5	\$20	\$14.40	\$13.60	\$12.30
6	7.3 ± .2	L-6-OV-6	5	3.75	L-12-OV-6	11	8	L-20-OV-6	16	11.20	10.50	9.50	L-35-OV-6	20	14.40	13.60	12.30
9	10.5 ± .4	L-6-OV-9	5	3.75	L-12-OV-9	11	8										
10	11.0 ± .5	L-6-OV-10	5	3.75													
12	13.7 ± .4	L-6-OV-12	5	3.75	L-12-OV-12	11	8	L-20-OV-12	16	11.20	10.50	9.50	L-35-OV-12	20	14.40	13.60	12.30
15	17.0 ± .5	L-6-OV-15	5	3.75	L-12-OV-15	11	8	L-20-OV-15	16	11.20	10.50	9.50					
18	20.5 ± 1.0	L-6-OV-18	5	3.75													
20	22.8 ± .7	L-6-OV-20	5	3.75	L-12-OV-20	11	8	L-20-OV-20	16	11.20	10.50	9.50					
24	27.3 ± .8	L-6-OV-24	5	3.75	L-12-OV-24	11	8	L-20-OV-24	16	11.20	10.50	9.50					
28	31.9 ± 1.0	L-6-OV-28	5	3.75	L-12-OV-28	11	8	L-20-OV-28	16	11.20	10.50	9.50					
30	33.5 ± 1.0	L-6-OV-30	5	3.75	L-12-OV-30	11	8	L-20-OV-30	16	11.20	10.50	9.50					

A VOLTAGE TOLERANCE MAINTAINED OVER 0-71°C DUE TO POWER DESIGN

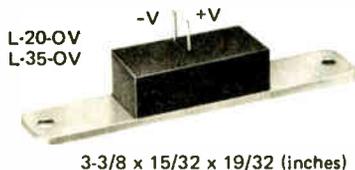

Lambda staffed sales and service offices

1
MID-ATLANTIC REGION
Melville, New York 11746
515 Broad Hollow Road
Tel: 516-694-4200
TWX: 510-224-6484

Long Island, N.Y.; New York, N.Y.;
Northern New Jersey
Tel: 516-694-4200

Delaware; Eastern Pennsylvania;
Southern New Jersey
Tel: 215-279-5644

Maryland; Dist. of Columbia;
Northern Virginia
Tel: 703-451-9340

Southern Virginia;
North & South Carolina;
Alabama; Georgia;
Tennessee; Mississippi
Tel: 704-542-1991

Largo, Florida
Tel: 813-596-5151

2
NORTH-EASTERN REGION
Lexington, Massachusetts 02173
2 Militia Drive
Tel: 617-861-8585
TWX: 710-326-7558

Rochester, New York
Tel: 716-454-6770

Poughkeepsie, New York
Tel: 914-297-4800

3
SOUTH-WESTERN REGION
Dallas, Texas 75231
6950 Winchester
Tel: 214-341-5130
TWX: 910-861-9048

Houston, Texas
Tel: 713-464-6554

Oklahoma
Tel: Enterprise 2-183

4
MID-WESTERN REGION
Arlington Heights, Ill. 60005
2420 East Oakton St., Unit C
Tel: 312-593-2550
TWX: 910-222-2856

Minneapolis, Minnesota
Tel: 612-935-6194

Cleveland, Ohio;
Western Pennsylvania
Tel: 216-585-7808

5
FAR-WESTERN REGION
Carson, Calif. 90746
20601 S. Annalee Ave
Tel: 213-537-8341
TWX: 910-346-7649

Denver, Colorado
Tel: 303-779-9561

6
NORTH-WESTERN REGION
Sunnyvale, California 94086
599 N. Mathilda Ave., Suite 210
Tel: 408-738-2541
TWX: 910-339-9243

LAMBDA MANUFACTURING PLANTS
Melville, N.Y.
Plant I 515 Broad Hollow Rd.
Plant II 1770 Walt Whitman Rd.
Reynosa, Mexico
Corpus Christi, Texas
121 International Dr.

LAMBDA
ELECTRONICS
DIVISION OF VECO INSTRUMENTS INC



Interconnection with Japan.

We are not thinking of a submarine cable across the Pacific. The non-stop flights available now are definitely an ideal way to get there, but, if you are involved in electronics, you will probably find yourself with a plug in your hands and no place to plug it in.

Why not leave aside the long exchanges of letters of inquiry, the overseas calls with words sounding quite clear but with meanings you can't really grasp.

More than 35,000 readers of Nikkei Electronics, a biweekly maga-

zine published in Japanese, are a selective choice of decision makers in all the branches that may interest you in the industry. Interconnection in the sense of the word that leads to good, profitable business. That is the business we are in and that is what we have to

offer you.

Japan needs the other advanced nations for the very life of its electronics industry and you will find Nikkei Electronics to be just that kind of interconnection that will open wide the doors to the success you considered impossible.

Japan's foremost electronics publication

Nikkei Electronics


NIKKEI-McGRAW-HILL, INC.
The publisher of Nikkei Electronics
Wataru Makishima, Manager, Advertising
Nikkei Annex Bldg. 2-1-2, Uchi-Kanda, Chiyoda-ku,
Tokyo, Japan. Telex: J26296 NKMCGRW

Subscriptions: 35,284 (as of May 16th, 1977)
Regularly audited by the Japan ABC.

For further information, write to:
H.T. Howland, Marketing Services Manager,
Electronics, McGraw-Hill Publications Co.,
1221 Avenue of the Americas, New York,
N.Y. 10020, U.S.A. Tel: (212) 997-6642

SOLVED!

YOUR BUS-RELATED DATA RECORDING PROBLEMS

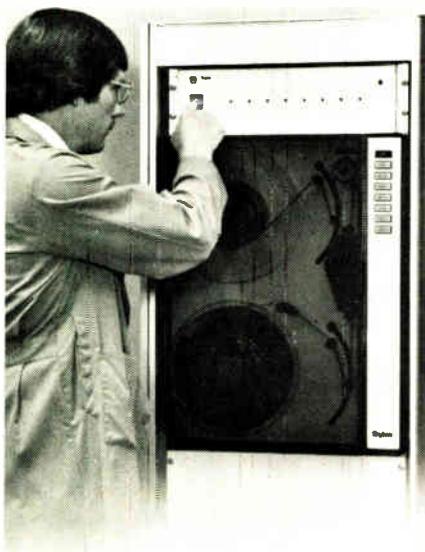

With Dylon's new GPIB (IEEE-488) tape recorders, you can now transfer data directly from the Bus to 1/2" magnetic tape. With NO interfacing. Just plug it in.

Once on tape, data may be transferred to your computer for analysis. Or it can be read back through the Bus to any GPIB-compatible minicomputer or calculator.

There's more. Much more.

To find out how Dylon GPIB tape recorders can solve Bus-related recording problems in your data collection system, please call or write our director of marketing.

Dylon

The Dylon Corporation
3670 Ruffin Road
San Diego, California 92123
(714) 292-5584

New products

Industrial

Monitor offers dual set-points

Six-channel temperature unit provides alarm and shutdown control functions


Back in the dark ages, when solid state was represented by something that tinkled in a highball glass, temperature monitors lacked both dual setpoints and front-panel adjustments. In a typical application, the user wanted, and still wants, his instrumentation to respond to two temperatures. At the lower one he wants an alarm to sound or a light to indicate possible trouble; at the higher one he wants automatic shutdown. If he can't get a dual-setpoint monitor, he will need two monitors


per point—an expensive proposition.

A second annoying aspect of early monitors was their method of calibration. A resistance decade box was substituted for the resistance temperature detector (RTD), and the monitor was adjusted to read correctly at known resistances. The problem with this approach is that the sensor can be located hundreds or even thousands of feet from the monitor.

Enter the Omniguard 6106 six-channel temperature monitor. Since the unit is a dual-setpoint instrument, it provides all the necessary monitoring for six points with no need for doubling up.

The 6106 can monitor six separate two- or three-wire copper, nickel, or platinum RTDs continuously and simultaneously. A digital display can be set to show the alarm and shutdown set points for each channel as well as the actual RTD temperatures. Each channel has its own electromechanical shutdown relay with iso-

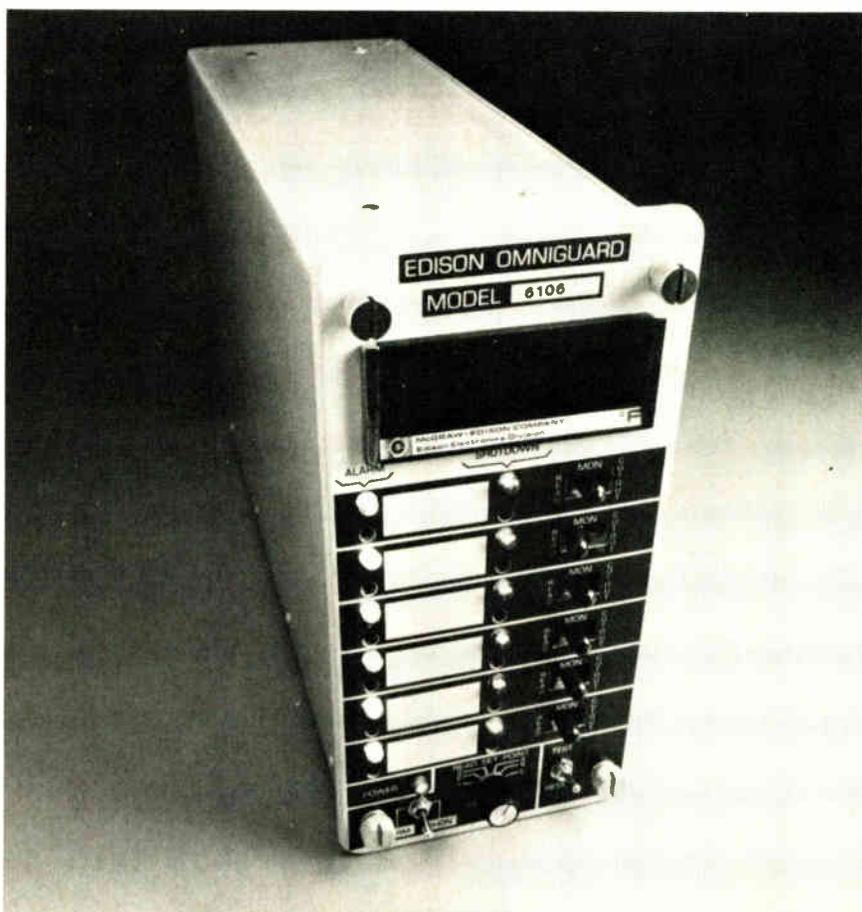

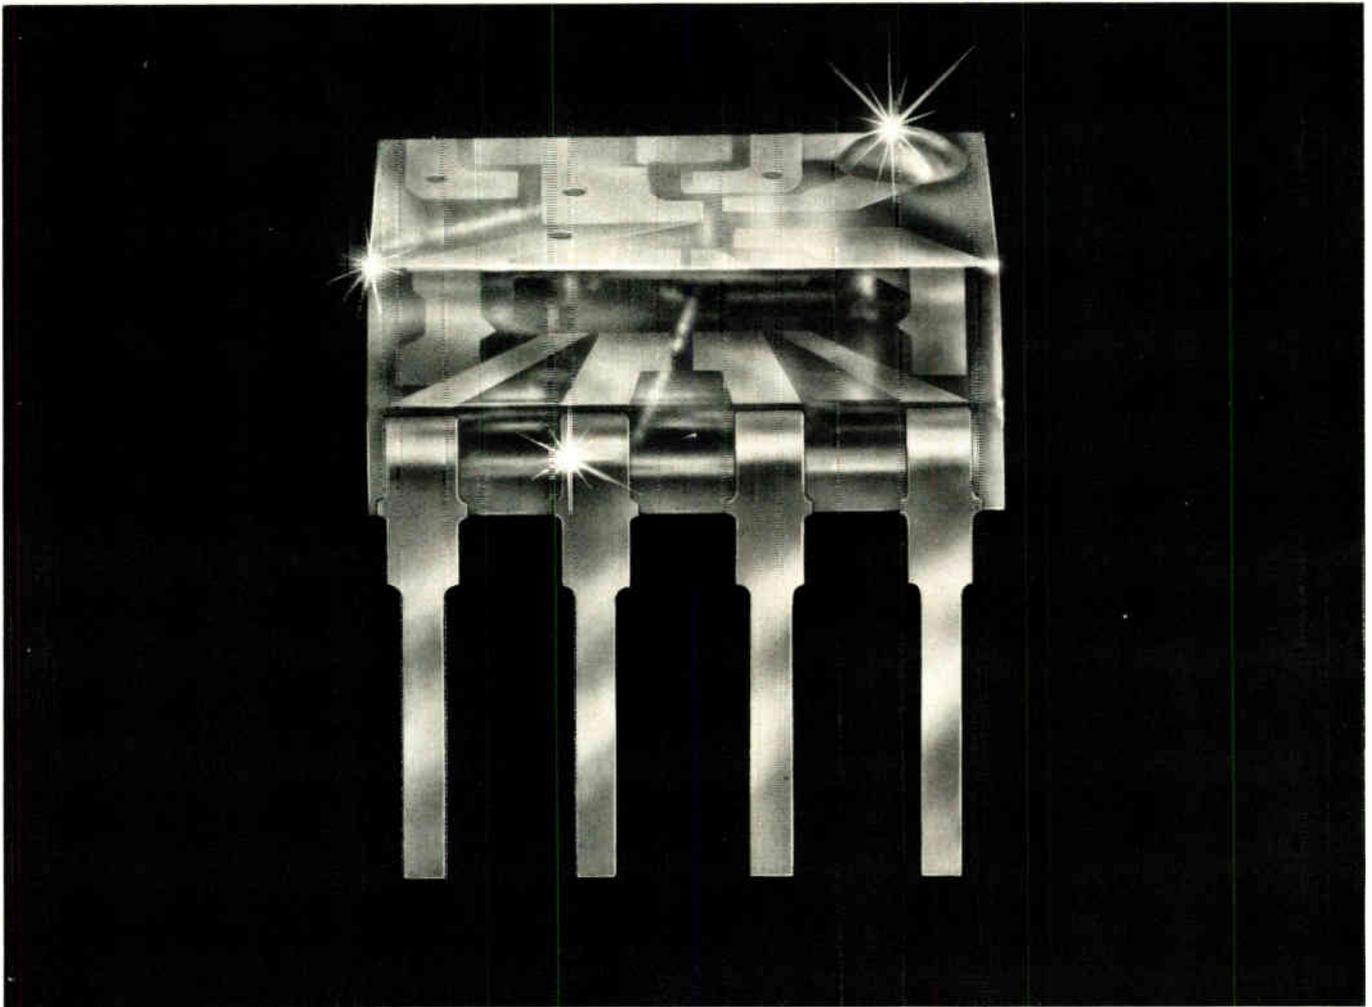

The easy way to cut noise in data transmission.

Ultra-fast opto-isolators!



IL-101 100 ns IL-100 65 ns

You can transmit data at 5 megabits per second. Eliminate noise pick-up problems in nearly all hard-wired data transmission

systems. And do it all very simply.

No elaborate shielding or conduit. No pulse transformers. Just an 8-pin DIP that connects directly to standard TTL circuits and operates on a 5-volt supply.

You get a typical propagation delay of only 65 ns with our IL-100. And 100 ns with our IL-101.

Both have UL approval, a Faraday shielded photodetector to maximize common mode rejection, a 3-state output for convenient multiplexing, a built-in Schmitt trigger to prevent oscillation, and an isolation rating of 1500 VDC.

Litronix produces 23 opto-isolators: photo-transistor and photo-Darlington in single, dual and quad packages, JEDEC types 4N25, 4N25A, 4N26, 4N27, 4N28 and devices with isolation voltages over 4000 VDC.

Tell me more

For more data on IL-100, IL-101 and other opto-isolators phone (408) 257-7910 or send coupon.

NAME

TITLE

ORGANIZATION

ADDRESS

ZIP

PHONE


Mail to Litronix, Dept. E, 19000 Homestead Road, Cupertino, CA 95014. Phone (408) 257-7910.

litronix

Tickets-Labels-Multiple Forms

VICTOR

has the printer for you.

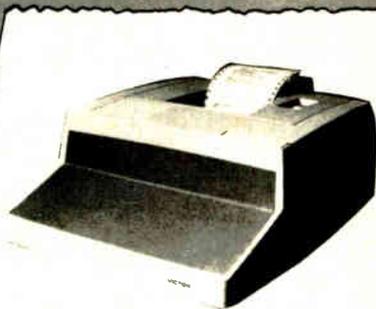

Applications:

**Pharmacy Systems
Inventory Control
Hospital Systems
Ticket Printing
Label Printing**

Victor now offers a line of sprocket feed printers for printing labels, tickets, pre-printed forms or any other application requiring precise or heavy duty paper feed.

The 5000-463 series offers you three choices of interface: parallel; RS232C or TTY current loop. This allows the printer to be connected directly to most computers or microprocessors.

The printer prints 64 ASCII alphanumeric and symbolic characters. By sending the proper command code, characters can be expanded, printed in red or both for highlighting or headlining.

There are no moving parts when the unit is not printing which keeps the noise level down and increases reliability since the printer is not wearing itself out while sitting idle.

The dot matrix printing mechanism in the sprocket feed printer is similar to those used in almost 500,000 Victor print mechanisms in use today.

**John Tullio
Victor Comptometer Corporation**
3900 N. Rockwell Street
Chicago, Illinois 60618
312-539-8200

Send Technical Literature

Sprocket Feed Printers

All Victor's Print Mechanisms

Name _____

Company _____

City/State _____

Zip _____ Phone _____



The 5000 series allows interfacing with RS232C, 8-bit parallel or TTY current loop. Options include sprocket feed and 230 volt operation.

Circle 206 on reader service card

1977 Answer Book. It makes your job easier. \$25.

Who makes what? Over 4000 products, more than 5000 manufacturers with their local contracts and distributors, directory of trade names and catalogs, post-paid inquiry cards for 5-second ordering of current catalogs.

206

Electronics Buyers' Guide
1221 Ave. of the Americas
New York, N.Y. 10020

Yes, send me a copy of The Answer Book. I've enclosed \$25 (USA and Canada only, elsewhere send \$35). Full money back guarantee if returned within 10 days.

Name _____

Company _____

Street _____

City _____ State _____ Zip _____



New products

lated single-pole single-throw contacts. In addition, a seventh relay is activated if there is an alarm.

Each channel has its own indicator light for alarm signals and a second light that goes on when the channel is shut down. Once a channel goes into a fault mode, be it alarm or shutdown, a reset switch must be pressed to get it out of that mode. Removing the fault condition is not enough. Automatic reset is available as an option.


Other key features of the Omni-guard 6106 include linearizing circuitry that normalizes each channel for a specific RTD and failsafe operation that causes the output relays to open up if the monitor loses power. And for those people who still do not like digital readouts, analog meters are available as an option.

The price of the standard six-channel monitor with a digital display is approximately \$1,400. Small quantities are available from stock, with large orders requiring six weeks. The instrument is expected to be stocked in large quantities by January.

Edison Electronics, McGraw-Edison Co., Grenier Field Municipal Airport, Manchester, N.H. 03103. Phone Kent Threlfall at (603) 669-0940 [371]

Object detector has diameter of 0.25 inch

A subminiature source/receiver, consisting of a light-emitting diode and a photodetector, is designed to detect the presence or absence of objects in a wide variety of industrial applications. Packaged in a rugged, watertight, stainless-steel housing that measures 0.25 inch in diameter by 1.5 in. in length, the sensor has an operating range of 25 feet in the

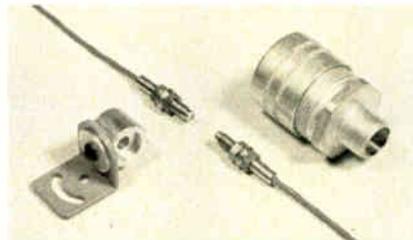

Electronics/October 27, 1977



Action!

It made us the leader in electronic equipment rentals.

When you call Electro Rent, expect action.

Our representatives are action-oriented specialists who can answer your questions quickly and get you the necessary equipment in hours.

We back them up with the nation's largest electronic equipment inventory and a network of service centers from coast to coast.

Find out why more people rent or lease their electronic equipment from the leader. Call us now for equipment, applications assistance or a free catalog. Or write our Marketing Manager at: Electro Rent, 4131 Vanowen Place, Burbank, CA 91505.

Call toll-free 800-423-2337 for immediate action!

In California call 800-232-2173

Interested in buying quality used equipment?
Ask for our Equipment Sales Division.

World Radio History



ElectroRent

A Teleco Company

Circle 207 on reader service card

TOTAL FREQUENCY CONTROL

FROM ERIE

HIGH FREQUENCY AT CRYSTALS



Erie AT Crystals are used over the frequency spectrum from 950 kHz to 200 MHz. Low temperature coefficient, extremely high Q, economical. Used in TCXO and VCXO oscillators, temperature controlled and, non-controlled oscillators, and filter applications. All size cans.

LOW FREQUENCY CRYSTALS



Low frequency crystals are available from 1 kHz to 1MHz in a broad variety of crystal holders and mounting configurations. Erie is a leading source for all types of high quality, Low Frequency Crystals.

CRYSTAL OSCILLATORS



Erie offers a broad range of economical as well as highly sophisticated Crystal Oscillators. These small size oscillators are available in a wide range of frequencies. Hermetically sealed crystals assure long term stability. Design assistance available.

CRYSTAL FILTERS

Erie quartz crystal filters are specified for use in communications receivers... as well as for radar, sonar and space applications.



Write for brochure describing Erie Crystals, Filters, Oscillators and Ovens.

ERIE

ERIE FREQUENCY CONTROL DIV. OF ERIE TECHNOLOGICAL PRODUCTS
Carlisle, Pa. 17013
717/249-2232

Circle 208 on reader service card 208

New products

transmitted-beam mode and 1 foot in the reflected-beam mode. The UL-recognized device can operate from -40° to 185° F.

To form a working system, the type 40BY1/47BY1 subminiature sensor combination is used in conjunction with a standard type 22 series 4000 LED photoelectric control, which contains the system modulation and demodulation circuitry, power supply, control logic, and output device.

Photoswitch Division, Electronics Corp. of America, One Memorial Drive, Cambridge, Mass. 02142. Phone S. L. Davis at (617) 864-8000 [373]

Signal conditioners connect transducers with instruments

A line of signal-conditioning interface units is designed to connect load cells and strain-gage pressure transducers with recording and control instruments. The units amplify the transducer signals and produce either a 4-to-20-milliamper current output or a voltage output of 0 to 1 volt or 0 to 10 v. The units have a maximum nonlinearity of 0.1% and a maximum temperature-induced error of 0.3% of reading per 100° F. Frequency response is within 3 decibels from dc to 2 kilohertz.

Tyco Instrument Division, 4 Hartwell Pl., Lexington, Mass. 02173. Phone (617) 861-7450 [375]

Precision load cells have little moment sensitivity

BBP series load cells have a moment-insensitive design that gives them a maximum off-center-load error of 0.05% per inch. The high-accuracy units are available with capacities of 1, 2, 5, 10, and 20 pounds. They have a minimum rated output of 2 millivolts per volt. Non-linearity is no more than 0.02% of rated output, and repeatability is within 0.01% of rated output. The cells are temperature compensated for operation between 50° F and

World's First Solderless DPM NLS' Thriftmeter PM-350



Unit Quantity— \$59

Features Include:

- Three full digits with 100% over-range (3-1/2 digits).
- Accuracy is $\pm(0.05\%$ Rdg. + 0.05% F. S.).
- $\pm 0.2V$, $\pm 2V$, $\pm 20V$, $\pm 200V$ or $\pm 1000V$ range.
- No zero adjustment.
- Programmable decimal with automatic polarity and overload indication.
- Operates from +4.5 to +6 vdc @ 1 W.
- Large 0.3" LED display.
- Small size: 1" H x 2.5" W x 3.25" D.
- Protected input.



Non-Linear Systems, Inc.

Originator of the digital voltmeter.

Box N, Del Mar, California 92014

Telephone (714) 755-1134 TWX 910-322-1132

Circle 242 on reader service card

PROFESSIONAL DISCOUNTS

Texas Instruments electronic calculator

TI-1750 LCD	\$139.35	SR-40	\$23.25
TI-2550 III	23.25	SR-51 II	47.95
Little Prof	12.55	TI-57 NEW	63.00
Dataman NEW	19.95	TI-58 NEW	95.79
TI-5100	38.75	TI-59 NEW	219.95
TI-5015 NEW	63.00	PC-100A	147.00
TI-5050M	77.55	MBA	66.95
TI-5040PD	95.00	Money Mgr	16.98
TI-305P	16.98	Bus Analyst	27.40
Dataclip	28.09	All Libraries Available	



HEWLETT PACKARD

We are Franchised H-P Dealer All accessories at discount

HP-10 NEW	\$139.00	HP-27	\$140.00
HP-19C NEW	275.00	HP-29C NEW	156.00
HP-21	64.00	HP-80	235.00
HP-22	100.00	HP-67	360.00
HP-25	100.00	HP-91	260.00
HP-25C	128.00	HP-92 NEW	500.00
		HP-97	599.00

Also SCM, Olivetti, National Semiconductor, Casio, Canon, Corvus, APF, Sharp, Craig, Sanyo, Record-A-Call and more. ALL AT GREAT PRICES!

FAIRCHILD

Programmable Video Game \$129.95

(2000 games possible)

Cartridges 17.95



Also Fairchild Watches!

WE WILL BEAT OR MEET ANY COMPETITORS' PRICE IF HE HAS MERCHANDISE ON HAND. All units shipped in original factory cartons with accessories according to manufacturers' specifications. In Calif. call (213) 370-5795 or CALL (800) 421-0367 (other than CA). Above prices are for cash only. Credit card prices differ. BankAmericard/Visa & Master Charge accepted. Send money order. Pers. ck (2 wks to clear). In CA add 6% sales tax. Add \$3.50 min. shipping charges. WE SHIP AIR on request. Subject to availability. Send mail orders to DEPT. WRITE OR CALL FOR FREE CATALOG EM-J

WILSHIRE - 2 STORES - HAWTHORNE CALL
tkenterprises
BE THE BUSINESS PRODUCTS

16611 Hawthorne Blvd., Lawndale, Ca. 90260
(213) 370-5795 (800) 421-0367

Circle 33 on reader service card

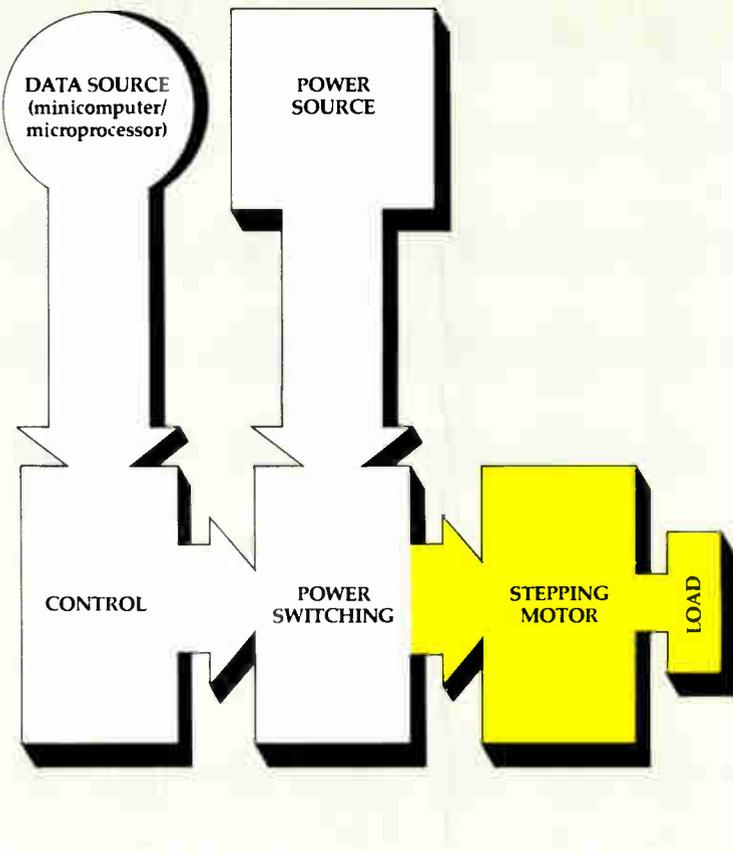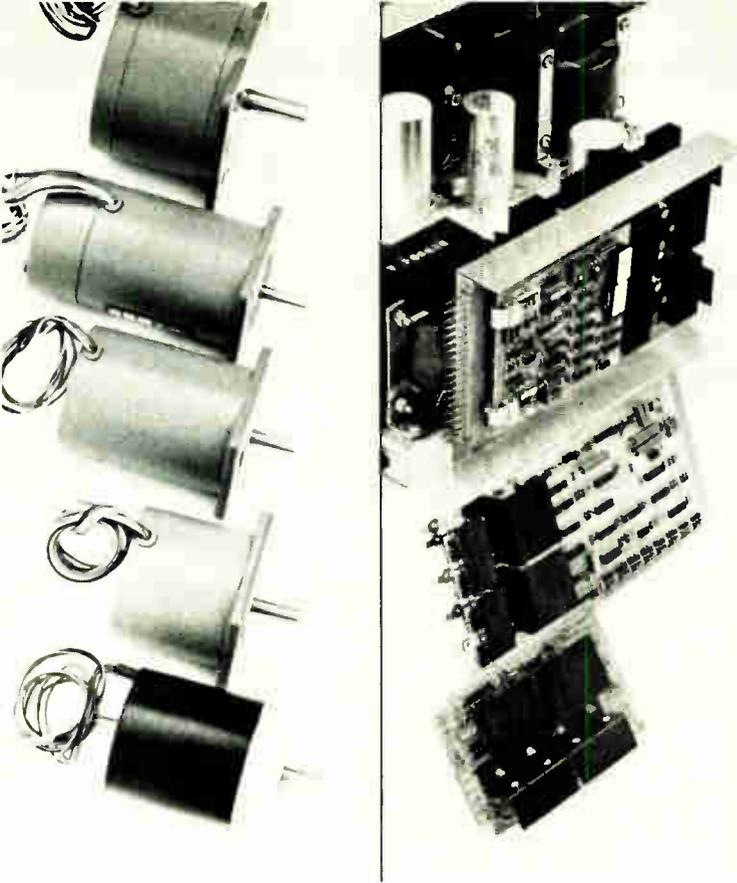

A 15-minute course in stepping motor technology.

The makers of Slo-Syn[®] stepping motors and controls bring you another in the series of technical cassette tapes.

A full 15 minutes on the technology of stepping motors:

As digital actuators for high performance positioning systems.

As incrementing output devices in microprocessor control systems.

As the alternative to servos, pneumatics or hydraulics for sequencing, rotating, cycling, positioning.

For a modest \$5.00, the recognized leader in stepping motor technology will move you step by step through the essentials.

This cassette covers the subject from maximizing torque during acceleration to damping, stability

and positional accuracy. Stepper control methodology and the applications best suited for either permanent magnet or variable reluctance motor types are discussed in a clear, concise manner. And more. All designed to put your company a step ahead.

A step ahead in positioning.



Superior Electric
Bristol, CT 06010 (203) 582-9561

Circle 209 on reader service card

#2

- Second in a series
- Yes, I would like _____ cassette(s) on stepping motor technology. Enclosed is \$5.00 (check or money order) for each cassette.
 - In addition, send me tape #1 "Stepping motor controls" at \$5.00.
 - Send me new free literature on Slo-Syn motors and controls.

Name _____

Title _____

Company _____

Street _____

City _____ State _____ Zip _____

GE miniature lamps offer you gigantic design advantages.


With 11 new wedge base GE lamps, you have more choices than ever.



Enjoy new design freedom with this expanded line of GE all-glass wedge base lamps. And keep enjoying the inherent benefits of the line: savings in weight, space, time and costs. GE now offers more than 30 wedge base lamps in three sizes: miniature lamps T-3¼ (10 mm diam.) and T-5 (15 mm diam.); subminiature lamp T-1¾ (6 mm diam.). Voltages range from 2.5 V to 28 V. Candlepower from 0.03 to 21 cd.

Use GE wedge base lamps with confidence for indicator, marker and general illumination applications, especially where space is at a premium. You may enjoy lower systems cost than with metal-based lamps and LED's. They're easy to insert and remove; have no soldered connections to corrode or break; and the filament is always oriented the same in relation to the base.

To start saving with GE wedge base lamps now, send for the latest bulletin on GE's expanded line. Order #3-5259R2. It's free.




For whiter, brighter light use GE halogen-cycle lamps.

GE halogen-cycle lamps offer you very high light output from a very small package. They can provide better light efficiency because the bulb doesn't blacken and because of accurate filament placement. Many have uniform bulb tops (no tip).

You get a whiter light than from comparable incandescent lamps because of higher color temperature operation. And they maintain their high initial output level for virtually the life of the lamp.

Because of their lower electrical power requirements, you also save on operating costs vs. comparable incandescent lamps. Some halogen lamps have long design life for low maintenance costs, too.

You can use GE halogen-cycle lamps with confidence when your design needs call for a lot of light in restricted space. For greatly expanded information on GE halogen-cycle lamps, send for your free copy of the new GE bulletin #3-5257-R.




How to order lamp samples and important new free catalogs.

For catalogs and information on how to get lamp samples, call your local GE Miniature Lamp Products Representative or write: General Electric, Miniature Lamp Products Department #3382, Nela Park, Cleveland, Ohio 44112.

GENERAL  **ELECTRIC**

New products

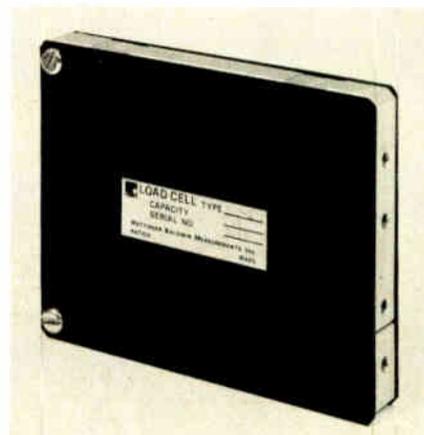

120°F. Their principal use is expected to be in parts counting, packaging, weighing, and similar precision applications.

Hotting Baldwin Measurements Inc., 17 Mercer Rd., Natick, Mass. 01760. Phone (617) 655-0950 [374]

Power monitors protect three-phase motors

Designed to protect motors against burnout caused by abnormalities on the power line, a series of power-line monitors will remove all power from a three-phase motor if it senses a lost phase, low voltage, phase reversal, or a phase-angle shift. A failure-indication lamp turns on when the monitor is activated.



Three adjustable voltage ranges are offered: the model 3P120 covers phase-to-phase voltages of 85 to 125 volts ac, the 3P240 covers 160 to 240 v ac, and the 3P480 covers 340 to 480 v ac. Prices for all units range

METSHIELD™ Fabric.

The first major advance in magnetic shielding in 50 years.



Now in 40" widths

...METSHIELD™ Fabric can help you achieve EMC in field repairs, prototype design, production equipment, and shielded rooms.

Now you have such a shielding. METSHIELD™ magnetic shielding fabric—a wholly new flexible product made from Allied Chemical's METGLAS® amorphous metal alloys.

Because of its exceptional strength and flexibility, METSHIELD fabric retains its full shielding effectiveness during fabrication and use.

This reliability of performance—plus the ease with which METSHIELD fabric can be fabricated—enables you to use magnetic shielding as a preferred method to achieve electromagnetically compatible system designs. And METSHIELD fabric now comes in 40" (1 meter) widths for even greater design flexibility.

Discover how this remarkable material can help meet your shielding needs. Phone John Dismukes at 201-455-4031 or Jack Thorp at 201-455-3306. Or return the coupon.

This is the magnetic shielding product whose time has come.

Increased sales of electronic equipment, a trend toward miniaturization and intensified regulatory considerations have put increased emphasis on EMC.

Consequently, electronics manufacturers need cost-effective magnetic shielding not plagued by fabrication problems and use limitations associated with conventional nickel alloys.

Check boxes for information on METGLAS® alloys and METSHIELD™ fabric.

- Technical data
- Fabrication
- Grounding and contacting
- Other (specify) _____
- Send me sample of METSHIELD fabric

Name/Title _____

Company _____

City/State/Zip _____

Mail to: Metglas Products, Allied Chemical Corporation
7 Vreeland Road, Florham Park, NJ 07932



The AC variety pack.



Your engineers, product testers, and quality assurance people could travel to 50 countries and still never see all the kinds of power an Elgar AC Power Source puts out. Its 50 available plug-in oscillator modules let you choose variable or fixed frequencies from 45Hz to 10 KHz. Or you can put in a programmable oscillator and use your imagination. All this in ratings up to 16 KVA. Write us today, and we'll reveal our Sources.

ELGAR

See us at MIDCON/77,
Booths 1232-1234

Elgar also is a leading producer of AC Line
Conditioners and Uninterruptible Power Systems

8225 Mercury Ct., San Diego, California 92111, Phone (714) 565-1155

New products

from \$38 to \$49.50 depending upon quantity. Delivery is from stock.

Amtron Corp., P. O. Box 2783, Norman, Okla. 73069. Phone (405) 364-6143 [376]

Predetermining hour timer
resolves five digits

The HVS15 predetermining hour timer is a five-digit electromechanical unit that provides 9,999.9-hour resolution—a previously unavailable level. All five digits can be preset. When the timer counts down from the preset number and reaches zero hour, it operates a 1-ampere single-pole double-throw relay.

Available in 50- and 60-hertz models, the timer can be supplied with either electrical or manual push-button reset. It sells for \$90 in hundreds. Delivery is from stock.

Kessler-Ellis Products Co., Atlantic Highlands, N. J. 07716. Phone Leslie Gleason at (800) 631-2165 [377]

Temperature controller
is only 3⁵/₈ inches deep

Temperature controllers in the Micro 2000 series are true plug-in instruments even though they measure only 3⁵/₈ inches in depth. A deviation meter that spans $\pm 50^\circ$ is standard. Model 2000-B instruments



are rated at 7 amperes at 120 v ac or 5 A at 240 v ac. Model 2000-T units use solid-state relays and have a 1-ampere continuous-current rating.

Athena Controls Inc., 20 Clipper Rd., West Conshohocken, Pa. 19428. Phone Bob Long at (215) 828-2490 [378]


Electronics/October 27, 1977

SUPER MINIATURE

Neon Glow Lamps

Circuits Volts..... AC 105-125
 Series Resistance..... 150K Ω
 Nominal Current..... 0.3mA
 Total Flux 20mlm MIN.
 Average Life Hours ... 30,000

Dimension: mm



NL-8S



NL-35 G



NL-21 G

CLEAR-GREEN

Fluorescent Glow Lamps

Circuit Volts..... AC or DC 105-125
 Series Resistance..... 33K Ω
 Nominal Current..... 1.6mA
 Total Flux(MIN) AC:120mlm DC:130mlm
 Avg. Life Hours AC:30,000 DC:40,000

Circuit Volts..... AC 105-125
 Series Resistance 27K Ω
 Nominal Current..... 1.5mA
 Total Flux 90mlm MIN.
 Avg. Life Hours 20,000

● MAIN PRODUCT

NEON GLOW LAMP, XENON FLASH LAMP,
 RARE GAS, DISCHARGE LAMP,
 MINIATURE : BLACK-LIGHT, UV-LIGHT,
 FLUORESCENT COLOR-LIGHT.

ELEVAM ELECTRONIC TUBE CO., LTD.

NO. 17-8 CHUO 2-CHOME OTA-KU, TOKYO JAPAN
 TELEPHONE : 03(774) 1231-5

EXPORT DIVISION : JAPAN NANOTRONIX CO., LTD.
 OTA-KU TOKYO, TELEPHONE : 03 775-4811 TELEEX 246-6583 JNANOX


Circle 34 on reader service card

THE μ P MEMORY...\$75*



Model CM-600
 Mini-Dek®


- For program loading, diagnostics, extended memory
- 1.6 megabits/200K Bytes, 2.4K Baud
- Includes all read/write and motion electronics
- Power 1Watt @ 5VDC, TTL I/O



11950 TWELFTH AVENUE SOUTH
 BURNSVILLE, MINNESOTA 55337, (612) 890-5135

*1K Qty.
 Avail. N. Amer. only.

Circle 36 on reader service card

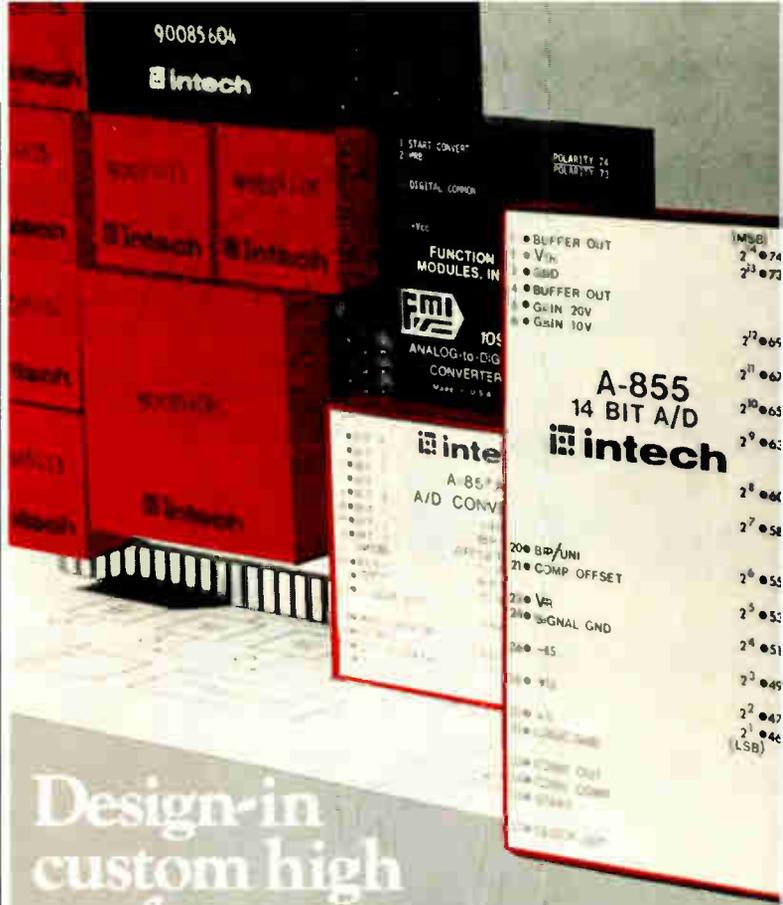

Design-in
 custom high
 performance at
 standard low prices
 with Intech A/Ds.

Whether you're looking for high resolution and/or high speed for commercial or military applications, there's a broad line of A/D "cost performers" that you should, and can, take a look at today. For example:

- 109 The versatile \$99.00 naked A/D with 16-bit or 5 $\frac{1}{2}$ -digit resolution offers OEM flexibility in output configuration.
- A-855-14 A 14-bit A/D with a conversion time of 25 μ s, gain t.c. of ± 7 ppm/C at a new low price of \$295.00. A popular converter for medium to high speed computer-controlled data acquisition systems.
- A-856-16 A 16-bit performer at less than 10 μ s, with sample and hold, is a veteran unit for high speed data acquisition systems, with large numbers of low level data points.
- A-858-16 Our newest A/D offers 16-bit performance at 40 μ s and includes buffered input and byte-segmented tri-state outputs, all for \$425.00. Options include uni/bipolar inputs/outputs, Samples and Holds (settling times: 2 μ s to 10 μ s) and more.

The above listing is just a small sample of what Intech/FMI A/Ds can do to fit your design needs. We don't stop there either. There's a wide choice of high speed 8 and 12-bit A/Ds, also. Plus, Intech gives you design assistance and sample modules for testing that are available as fast as you ask. All units are tested through all parameters before delivery, burned-in, and guaranteed to be at spec or better.

Circle the reader service number below, or, call or write today, for more information on the Intech/FMI complete line of A/D converters.



intech/function modules

282 Brokaw Road, Santa Clara, California 95050
 Phone (408) 244-0500 TWX: 910-338-0254

Circle 213 on reader service card


Introducing

KERAMAX

and a new kind of performance —

up to 3300°F in air

with KERAMAX
LaCrO₃
elements.

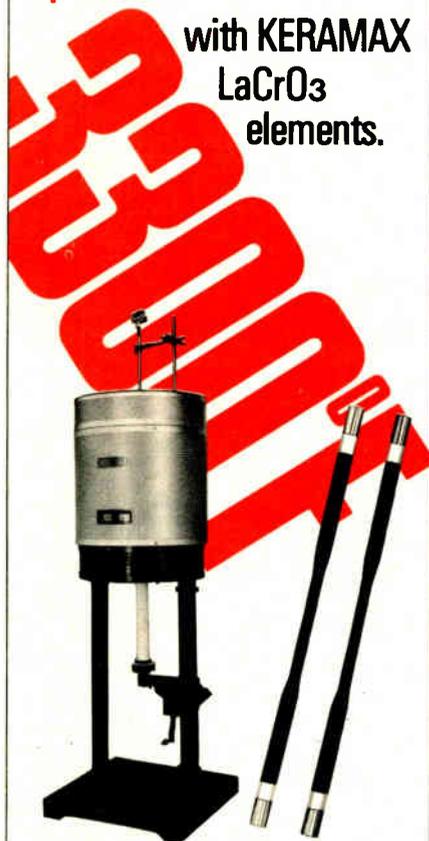

KERAMAX high temperature furnaces and LaCrO₃ heating elements excel where others pale by delivering higher working temperatures in oxidizing atmospheres with stability, durability, simple operation and a lower cost/service life ratio. KERAMAX developed by Nippon Kagaku Togyo Co., Ltd. provides a new level of performance at the highest working temperatures, whether for R&D, materials testing or production.

Furnace Applications

- Growing single crystals of (for example), ferrite for VTR heads • High temperature properties measuring • Ceramics sintering • Metal and slag heat treatment

KERAMAX LaCrO₃ Elements

- Longer service life at higher working temperatures in oxidizing atmospheres • Lower cost/service life ratio • Near zero resistance temperature coefficients at high temperatures; negligible electric resistance change due to aging • Excellent sensitivity and stability for precise temperature control; easy operation • Automatic control ease • Allows direct electricity supply at room temperature • Silicon carbide power units applicable for KERAMAX • Suitable for use as light source and electrodes

● Write or Telex for Complete Details

Futek CORP.

Nishimura Bldg. 13-11, Nishi-Gotanda 1-Chome,
Shinagawa-ku, Tokyo 141, Japan
Phone: 03-494-0471 Telex: TOK 2467455

New products

Components

Resistors have low thermal emfs

Precision components mix ruggedness and stability with tolerances to 0.005%

Vishay's S102 resistors have long been known for their superior long-term stability and low temperature coefficient. Now, by taking the Bulk Metal technology that underlies the S102 and combining it with an improved fabrication process called unit construction, the manufacturer has added increased ruggedness and reduced thermal emf and created a new resistor called the S102C. The new units are designed to meet or exceed all requirements of MIL-R-55182/9, Characteristic Y—the military's toughest resistor specification. Their thermal emf of 0.3 microvolt/°C difference in lead temperature makes them especially applicable to low-level dc switching.

Key to the performance of the new resistors is their use of flattened "paddle leads" for connection to the resistive element. A single weld bonds each lead to the etched Bulk Metal element; the assembly is then sealed in silicone rubber and encapsulated in a compression-molded case.

This new design ensures lead integrity, provides excellent resistance to moisture and high tempera-


tures, and improves load-life stability. At the same time, the advantages of the standard S102 resistors are retained. The new units exhibit the same low noise, low temperature coefficient, tight tempco tracking, and superior high-frequency performance as the earlier units.

Currently available resistance values range from 1 ohm to 100 kilohms, while tolerances go from 0.005% to 1%. Complete details are set forth in Bulletin R-800A.


Vishay Resistive Systems Group, 63 Lincoln Highway, Malvern, Pa. 19355. Phone (215) 644-1300 [343]

Toggle switches can be used in microwave region

Series 10 subminiature toggle switches are low-capacitance devices (shunt capacitance is about 0.4 picofarad) that can be used effectively up to about 2 gigahertz. The switches do not need shielding to

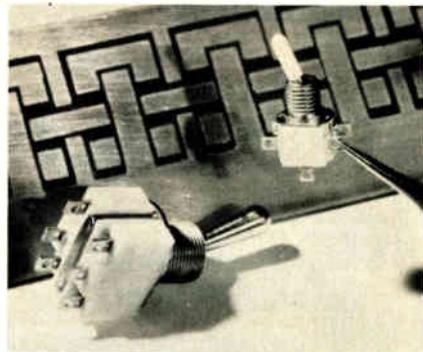

provide high isolation. Designed for low-energy applications, they are useful whenever space is at a

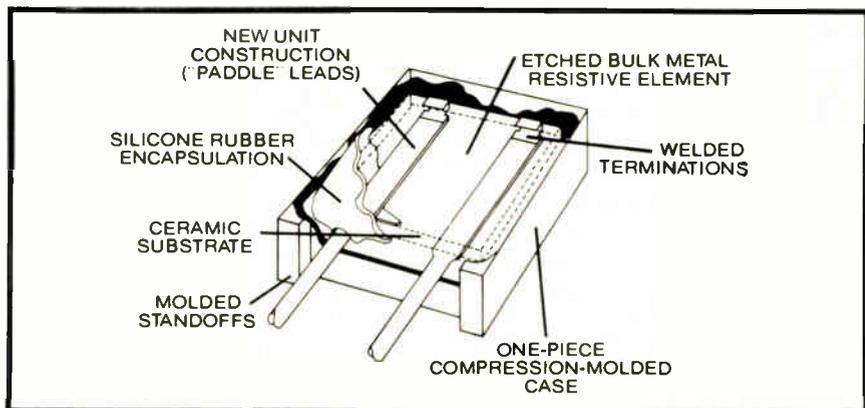

Now you can get 3 different types of solid-state relays from P&B.

That's P&B solid-statesmanship.

Specify P&B solid-state relays for wide choice, top performance, fast delivery. Three designs—103 ratings and voltages—now available from your local distributor. Get P&B experience—nearly two decades of designing solid-state devices.



New EAX Series. Solid-state 1.2 ampere AC relay. Transformer coupled. Zero current turn-off.

Low cost, solid-state relays that can be driven directly by logic circuitry (TTL, MOS, HTL, and others). For switching solenoids, fractional hp motors, heating elements, contactors and small lamp loads.

Thyristor switch controlled and isolated by a pulse transformer circuit. Terminals for printed circuit board mounting (0.1" grid).

Expected life of over 100 million operations. Temp. range: storage, -40°C to +85°C. Operating ambient, -10°C to +55°C.



EOM/EOT Series. 0.1 to 20 amperes. All solid-state opto-coupled AC relays.

Medium power, 120/240 VAC 50/60 Hz switches. Controlled and isolated by opto-electronic coupler. For use as ON/OFF switch for loads through 20 amperes. EMI and RFI are greatly reduced due to zero voltage turn-on and zero current turn-off.

An ideal component for interfacing between the logic output of TTL, HTL, or MOS circuitry and such AC loads as solenoids, motors, lamps and transformers.

Expected life greater than 100 million operations. Temp. range: storage, -40°C to +85°C. Operating ambient, -10°C to +55°C.



ECT Series. Solid-state Hybrid relay. Reed triggered triac. 0.1 to 32 amperes.

Medium power, 120/240 VAC 50/60Hz solid-state switches controlled and isolated by a reed relay, packaged for direct chassis mounting. Intended for switching AC loads such as solenoids, motors, lamps and transformers through 32 amperes. AC and DC actuation available.

Advantages: long life, high inrush switching capacity and input/output isolation provided by the reed relay.

Expected life greater than 10 million operations. Operating ambient, -10°C to +55°C.

Standard models have .250" quick-connect terminals. .187" and .205" also available.

Ideal applications for P&B solid-state relays include process controls, instrumentation, life support equipment, alarm devices, machine tools, vending machines, dryers, photocopiers, lighting and traffic controls.

See your P&B representative or authorized P&B distributor for specifications on his 103 off-the-shelf solid-state and hybrid relays. Or, write Potter & Brumfield Division AMF Incorporated, 200 Richland Creek Drive, Princeton, Indiana 47671. 812/386-1000.

AMF
Potter & Brumfield

Potter & Brumfield

New products

premium. Series 20 miniature toggle switches are similar devices. They are somewhat larger, perform up to 1 GHz, and can be mounted on a printed-circuit board. Both series are double-pole double-throw devices and are optionally available with one set of poles shorted. The switch bodies are made of Teflon, the

contacts of gold-plated fine silver.

Small quantities are available from stock. For one to nine pieces, the series 10 switches sell for \$5.50 and the series 20 for \$6.50.

Instru-Mech Inc., 1275 Bloomfield Ave., Fairfield, N.J. 07006. Phone Dave Demarest at (201) 575-1860 [344]

Dpdt DIP relay stands only 0.38 inch high

Standing only 0.38 inch high, a double-pole double-throw electromechanical relay housed in a dual in-line package fits well within 0.5-inch spacings when mounted on a printed-circuit board. It fits standard 16-pin sockets, and its footprint is the same as those of similar, but taller, units.

The unit is extremely sensitive: its coil requires a maximum of 200 milliwatts at pull-in. The relay can switch a resistive load of 1 ampere at 28 volts dc and can carry 5 A. Life expectancy is in excess of 10 million cycles for low-level loads. Typical operating time is 4 milliseconds; typical release time is 1 ms.

Allied Control Operation, Control and Systems Division, Gould Inc., 100 Relay Rd., Plantsville, Conn. 06479 [345]

Single-turn pots will last 5 million shaft rotations

When it is expected that a potentiometer will be more or less continuously adjusted by its end user, it becomes important to consider the effect of shaft rotation upon the pot's life. Pots in the 6180 series have a conductive-plastic element that gives them a life expectancy some 500 times greater than that of carbon composition pots—5 million shaft rotations versus 100,000. They can thus reduce field repair time, expense, and frustration in a wide variety of equipment. The various pots in the series are electrically similar; they differ only in bushing and shaft dimensions. All provide a 1-watt power rating at 70°C, a maximum operating temperature of 125°C, a maximum output roughness of 0.1%, fabrication from non-flammable materials, and essentially infinite resolution.

Beckman Instruments Inc., Technical Information Section, Helipot Division, 2500 Harbor Blvd., P.O. Box 3100, Fullerton, Calif. 92634 [346]

OPTO-METERS

two proven performers

Name your most important criteria for a general purpose photometer/radiometer. If you need reliability and an excellent price/performance ratio, we've got it.

40X ANALOG OPTO-METER—a high quality, low cost photometer/radiometer. It's a portable instrument with the accuracy, reliability and capability found in higher priced models. Measurement range: 10^{-2} to 10^{-9} W; 10^4 to 10^{-3} fc • flat 450 to 950 nm, and CIE response • NBS traceability to $\pm 2\%$ • no measurable drift • fully calibrated.



80X DIGITAL OPTO-METER—one step up from the 40X with an extra decade of measurement (10^{-2} to 10^{-10} W and 10^4 to 10^{-4} fc). The 80X is battery and AC powered for both lab and field use.



These are only two of the UDT Performers—light measurement instrumentation to fill a wide range of requirements. Call or write for applications assistance.

YEARS AHEAD IN LIGHT

detection • measurement • application




UNITED DETECTOR TECHNOLOGY, INC.

2644 30th Street, Santa Monica, California 90405

Telephone: (213) 396-3175 Telex: 65-2413

Dura-Con^{*}

Smallest connector Tough as the biggest.

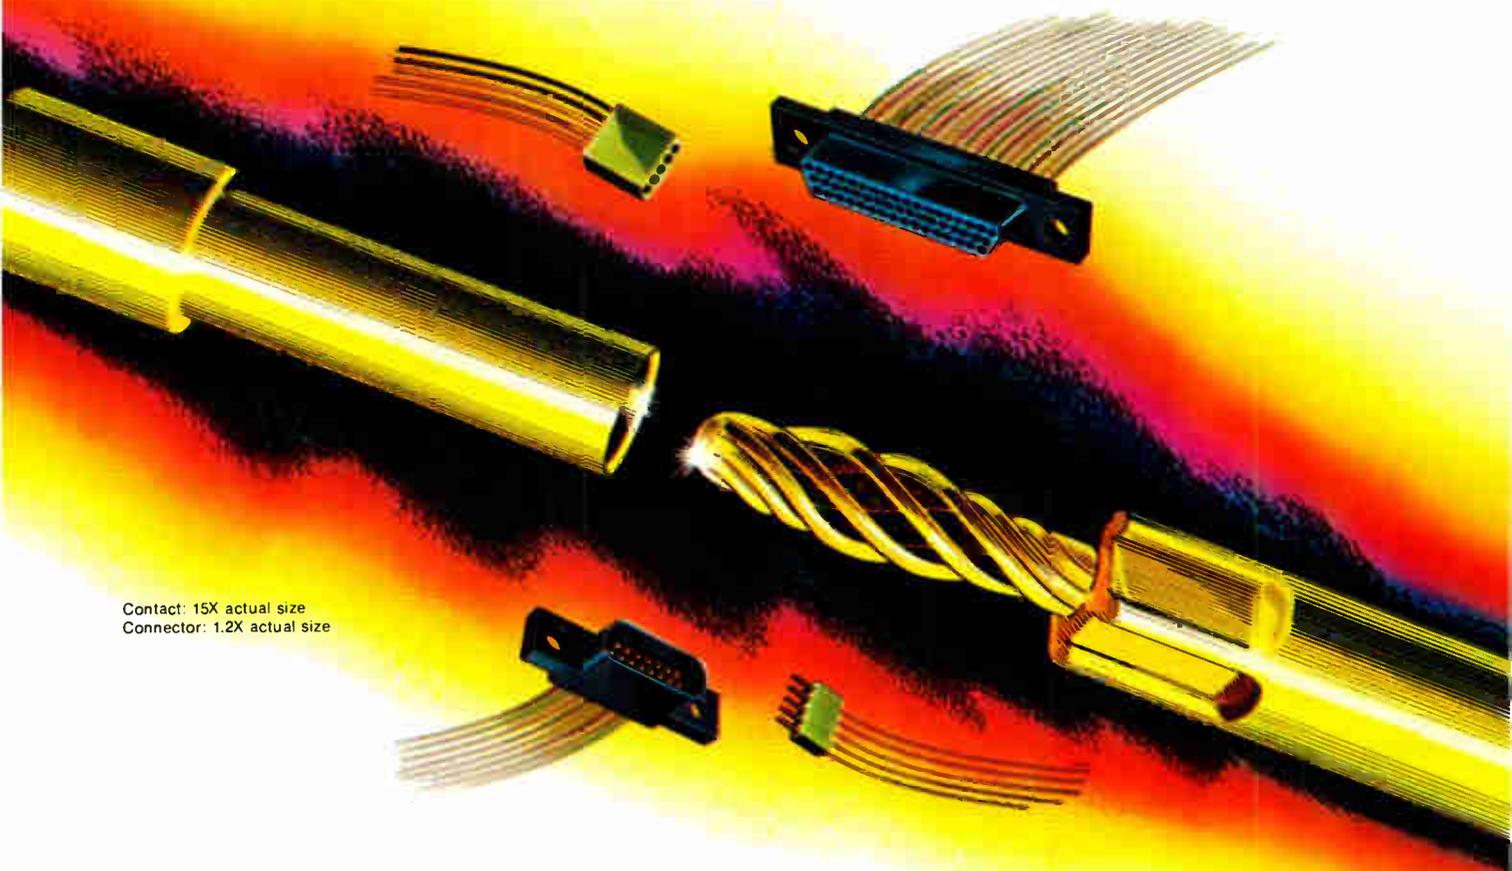

Contact: 15X actual size
Connector: 1.2X actual size

Use it your way or ours

So small you can barely see it, yet the Dura-Con contact has better performance and is more dependable than almost any other connector, regardless of size.

These remarkable characteristics are the result of the unique spiral spring design of the male contact, which provides seven points of contact on the female. For example:

Shock resistance: No discontinuity,
20 shocks, 500g

Vibration resistance: No discontinuity,
10 to 2000g. .06" double amplitude or 50g.
(6 nanosecond sensitivity)

Durability: 500 mating cycles minimum
Temperature: -65° to +275° F

Where space, weight or signal path reduction is required, the Dura-Con, with its 0.050" contact spacing, cannot be excelled.

The Dura-Con connector system is available in strip (up to 20 contacts) and "D" rectangular (9, 15, 21, 25, 37 and 50 contacts) configurations from stock, or it can be adapted to your custom design or termination requirements. Contact your TRW Cinch Connector distributor or field sales office or write to TRW Cinch Connectors, 1501 Morse Avenue, Elk Grove Village, Illinois 60007, (312) 439-8800. CC-7716

*Trade Mark TRW Inc. Licensed by New Twist Connector Corp.

TRW CINCH CONNECTORS

ANOTHER PRODUCT OF A COMPANY CALLED TRW

the inside man...

"I'm ok in the normal chamber, Fahrenheitwise. But these Reliability burn-in chambers, like the CRITERIA IV, are a bit much. 200°C and such.

"But it's the only way I can be sure your production quantities of IC's, RAMS, ROMS, μ PS and other devices will receive the precise heat, power and dynamics they need and deserve in this age of exactness.

Just look at these facts:

- Dynamic Burn-in to 200°C
- Up to 11,000 RAMS at one time
- "Exsert Connection" provides for external drivers and long connector life
- 10 billion hours of device time logged by Reliability Inc. in our burn-in facility in Houston — nation's largest
- CRITERIA units now in operation in many major manufacturers of solid state devices


"Let me demonstrate our cost effectiveness for your plant... for small lot or production quantities."

Call Bob Burton, (713) 666-3261.



Reliability, Inc.

P. O. Box 37409/Houston, Texas 77036
713/666-3261/TWX: 910-881-1739

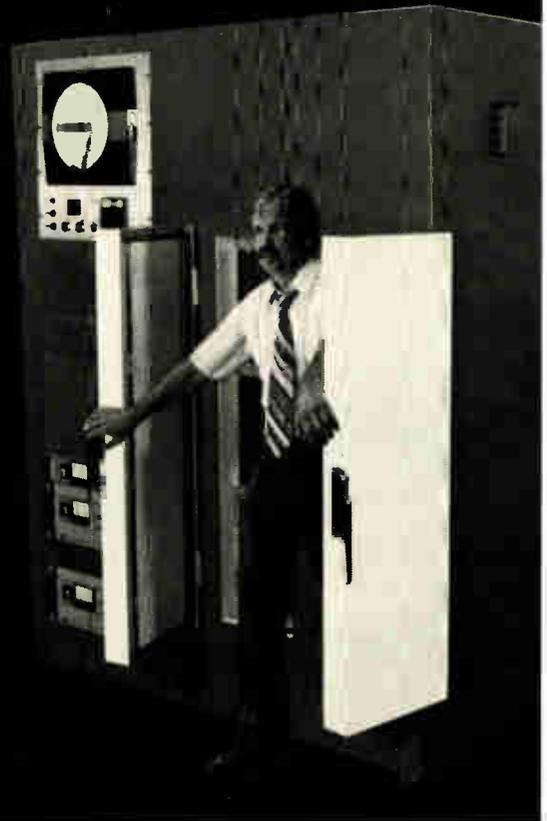

Circle 40 on reader service card

Cartridges.



The standard of reliability.

Our rugged TC2000 and TC1200 quarter-inch data cartridges promise a long lifetime of error-free performance. Precision components and computer-grade Verbatim[™] media assure data reliability good enough even for IBM's desk-top 5100.

The Verbatim name on removable magnetic media is our pledge of quality. Ask for it by name. Write or call for the name of your local Verbatim distributor.




Information Terminals Corp.
323 Soquel Way
Sunnyvale, CA 94086
(408) 245-4400

Information Terminals S.A.
Case postale 296
1215 Genève 15
Switzerland
Tel: (022) 32-32-39
Telex: 22647 ITGE CH

ITC—Far East
404 Roppongi Skyheights
3-2-21 Roppongi, Minatoku
Tokyo, Japan
Tel: (03) 583-1981
Telex: J 47879

If you could cut base material cost from \$15 or \$30 down to \$3 per square foot, how much would you save next month?

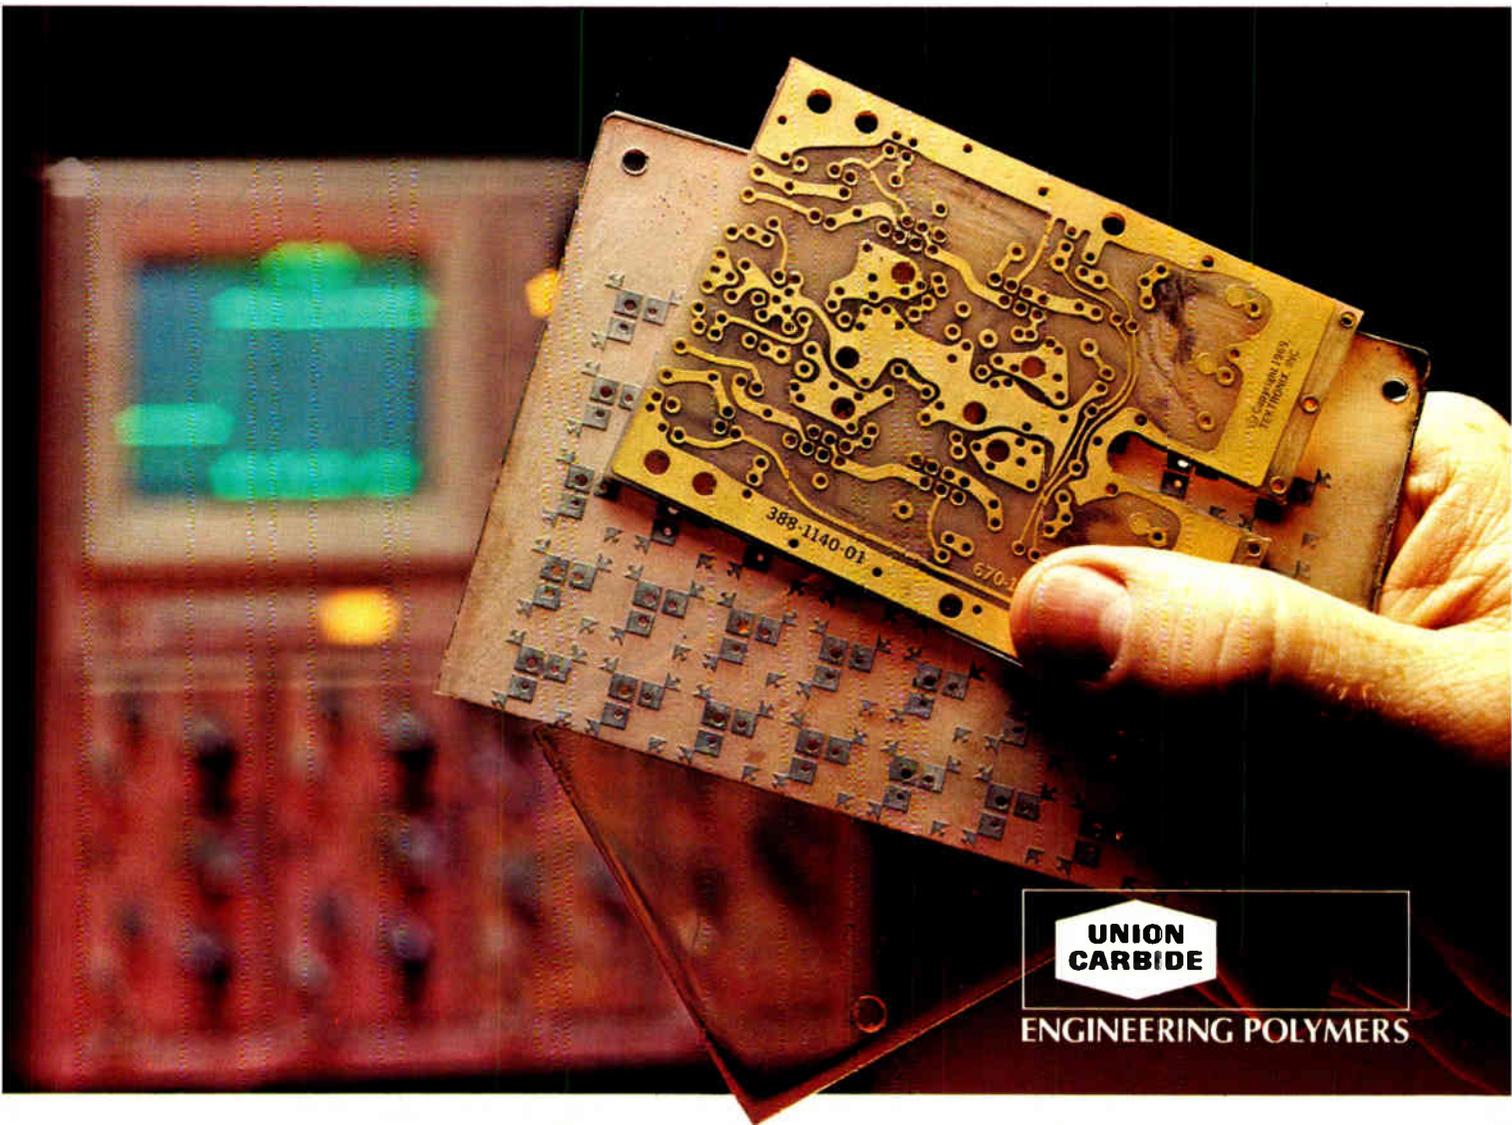

UNION CARBIDE
ENGINEERING POLYMERS


Maybe \$10,000 per month? More? Less?

Well, Tektronix, Inc. of Beaverton, Oregon thought the savings impressive enough for their high frequency circuit boards to switch from polyphenylene oxide to an extruded polysulfone (UDEL Polysulfone, of course) just 1/16 of an inch thick.

Their processing costs are about the same as for other base materials with similar electrical properties. Even the quality and yields (c. 80%) are close on. But since they stopped using copper clad polyphenylene oxide they also get a use temperature 100 deg. F. above that material.

Polysulfone outperforms other materials at a lower cost in high frequency applications because of its excellent electricals (see graph) plus all these advantages:

- withstands 500 deg. F. wave solder bath for 5 secs.
- good notched Izod: 1 ft-lb/in.
- impressive chemical resistance
- ink and adhesive baking at 320 deg. F.
- good peel strength
- and polysulfone can be *molded* with stand-offs, holes of all sizes, and any shape, to save machining and finishing time.

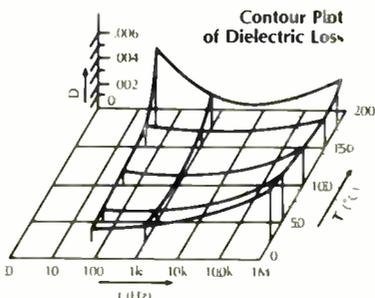

How much more can we tell you here? Write for full data using the coupon below or the reader service card.

Maybe I can cut my high frequency circuit boards cost by 90%. Let me look at your data on UDEL Polysulfone

Name _____
 Title _____
 Company _____
 Address _____
 Phone () _____
 City _____
 State _____ Zip _____
 Mail to:
 Union Carbide Engineering Polymers, Dept. PE10-2
 270 Park Avenue, New York, N.Y. 10017.

See us in Booths 602-604 Materials Show & Conference

World Radio History

Circle 221 on reader service card

MILITARY
APPLICATIONS

A/D CONVERTERS

by
MSK

Accuracy


Speed

Size

Repairability

Military

Temp. Range
-55°C to +125°C



- 4 Bit/50 nSec; Low Cost
- Ideal for Radar Scan Converters
- Holds Absolute Accuracy Over Temperatures
- Tracks a 10 MHz Analog Input



- 9 Bit/200 nSec.
- < 2 Bit Drift Over Temperature
- Insensitive to Clock Frequency

For Further Information Call or Write
M.S. Kennedy Corp.
Pickard Drive, Syracuse, New York 13211
Tel. 315-455-7077

New products

Instruments

Calibrator has 50-ppm accuracy

Microprocessor-controlled
instrument calculates
errors and tolerances

The model 5100A microprocessor-controlled calibrator is a highly flexible instrument with output accuracies and capabilities sufficient to cover the calibration of simple analog multimeters, 3½- and 4½-digit multimeters, and even some 5½-digit precision instruments. It produces dc voltages to 1,100 volts with accuracy to within 50 parts per million, ac voltages to 1,100 v at frequencies of 50 hertz to 50 kilohertz, ac and dc currents from 10 microamperes to 2 A, and eight resistances from 1 ohm to 10 megohms.

Among the many features made possible by the unit's microprocessor are: entry limit, which is a number that may be placed in memory so that the operator may not call for an output that exceeds the limit; lead compensation, in which the resistance of the test leads is subtracted


from the reading of the unit under test; scaling, which allows any fraction of full scale to be selected with the tolerance automatically calculated and displayed as a percentage; and editing, which allows a single rotary control to change any number originally selected from the keyboard.

In addition to the model 5100A, Fluke is producing the model 5101A—a similar instrument that incorporates a built-in tape cassette for the permanent storage of frequently used test procedures. The 5100A sells for \$6,495, while the 5101A is priced at \$8,495. Delivery time for the former is 60 days; for the latter it is 180 days.

John Fluke Mfg. Co., P.O. Box 43210, Mountlake Terrace, Wash. 98043. Phone toll-free (800) 426-0361 [353]

Snap-around probe measures ac and dc currents

Built around a Hall-effect flux sensor, a noncontacting current probe called a Current Gun measures currents from dc to 1 kilohertz when it is plugged into almost any voltmeter, multimeter, or oscilloscope. The snap-around probe has two basic ranges: ±10 amperes full scale and ±100 A full scale. In each

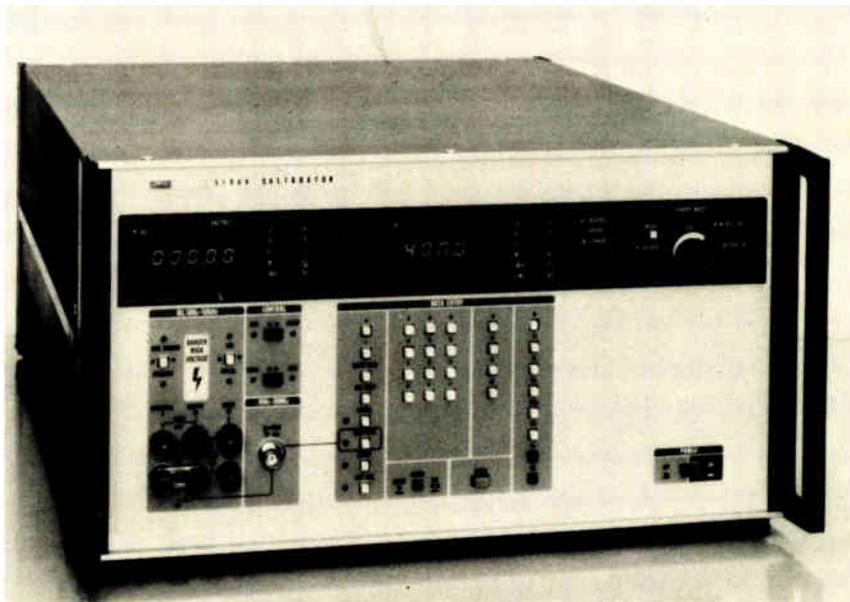

TURNKEY 620 SYSTEMS FROM NEFF USING THE HP 9825 CALCULATOR.. the logical next step in data acquisition.

You're involved in a scientific, engineering, or industrial project that could use a high performance, low cost data acquisition system. But you know that system integration and software costs of most systems actually exceed the hardware. And your need is now, so you want a system that will take data immediately with minimum user training.

Our turnkey 620S was designed for you

620S is a sophisticated data acquisition system with amplifier-per-channel or differential multiplexer analog signal processing and using the H.P. 9825 computing calculator for system control, data analysis and recording.

Neff systems are known for high performance and the 620S is no exception. Consider 0.1% accuracy with 50kHz channel scanning rate, fullscale input sensitivities from 5 millivolts to 10 volts, up to 256 channels or 2048 channels fully expanded, and 120dB rejection of common mode voltages up to 300 volts. Selectable data filters, simultaneous sample and hold and input signal conditioning are but a few of the many available features.

The Hewlett-Packard 9825 calculator provides the 620S computer performance with the operating convenience of a calculator. Programming is simple with HPL, an easy to learn, high level language designed for scientists and engineers. Standard features include a live-keyboard, alpha numeric printer and cassette recorder. Up to 24K memory is available. Plug-in peripherals include floppy disk, line printer, x-y plotter, and tape punch. It also attaches to H.P. Interface Buss.

A complete, integrated data acquisition system thats easy to use — thats our tunkey 620S.

Like to know more? Call us today at 213-357-2281 or write for our free brochure.

NEFF
INSTRUMENT CORPORATION

1088 E. Hamilton Rd., Duarte, Calif. 91010
Tel. (213) 357-2281 TWX 910-585-1833



Circle 223 on reader service card

Fast delivery of power supplies is no problem for Power/Mate.



**SEE US AT
MIDCON '77
BOOTH 910**

If you need open frames, sub-modules, switchers and other power supplies now, call Power/Mate.

90% of all catalog items are ready to be shipped to you today.

Power/Mate's East and West Coast plants are fully stocked with reliable open frame, sub-modular and switching power supplies ready for immediate delivery.

But our in-depth stock isn't the only thing

that has kept us the leader in the field of power supplies.

Our in-the-field representatives, factory trained applications engineers, telephone salespeople and complete repair facilities make us a company that's just as dependable when it comes to service.

We'll make sure you get the power supply you need when you need it. Because keeping you ahead of your competition keeps us ahead of ours.

For more information call us or write:




POWER/MATE CORP.

514 S. River St./Hackensack, New Jersey 07601/(201) 343-6294/TWX (710) 990-5023
17942 SkyPark Circle/Irvine, California 92714/(714) 957-1606/TWX (910) 595-1766

The world's largest supplier of quality power supplies.

Circle 228 on reader service card

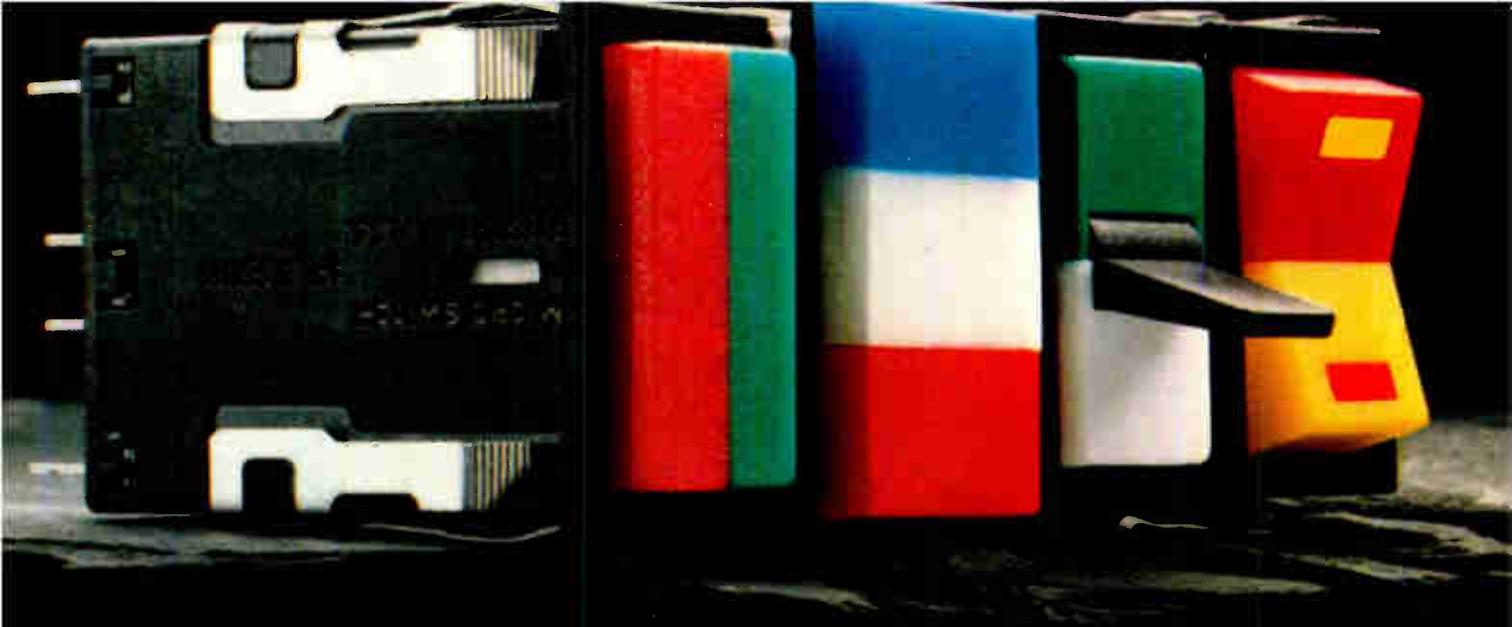

To make a complete line of pushbutton controls, you need more than pushbuttons.

Pushbuttons from MICRO SWITCH's AML (Advanced Manual Line) have always been attractive to designers. Because they look so good.



And because they're so easy to mount and wire.

But now, the AML series is even more appealing. Because now there's a variety of rocker and paddle switches to choose from, including dual lamp and dual color. Which means now you can perform just about any function with a harmonious display. You don't have to compromise.

AML controls also look appealing to the people who have to do the wiring. All are designed with the same depth for single level termination, regardless of switch or terminal type.

There's easy snap-in mounting from the front, PC board mounting or sub-panel mounting using individual, strip or matrix hardware.

Which means mounting is simpler. Wiring is simpler. Engineering time is reduced. And total installed cost is lower.

Plus, they offer solid state, electronic control or power switching in the same size housing. All AML devices are designed to meet international, UL and CSA standards.

Displays include split screen, hidden color, and a unique three-segment lens cap indicator. The choice of lamps includes T-1 $\frac{3}{4}$ wedge base, neon and LED.


AML has it all — pushbuttons, indicators, and now paddles and

rockers. But to see how good-looking AML really is, contact us for a personal demonstration.

MICRO SWITCH will provide you with field engineers for application assistance and a network of authorized distributors for local availability. Write us for details or call 815/235-6600.

MICRO SWITCH products are available worldwide through Honeywell International.

MICRO SWITCH
FREEPORT, ILLINOIS 61032
A DIVISION OF HONEYWELL

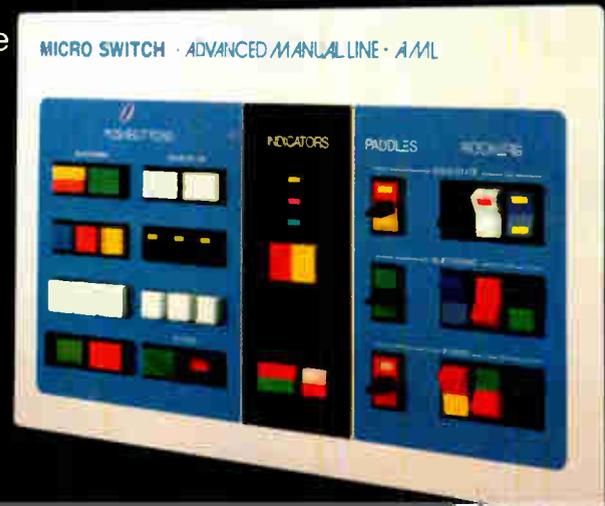

RF detectors fast delivery

Quantities to 200
from stock

You get fast delivery on WILTRON's quality RF detectors whether your needs are large or small.

And with discounts of up to 15% in quantity.

These are WILTRON's time-proved quality detectors with field-replaceable diodes. Diodes are field-replaceable even in 18.5 GHz models.

Call Walt Baxter at WILTRON now for details.



Model	Range	Connectors In	Connectors Out	Flatness	Price \$
71B50	100 kHz-3 GHz	BNC Male	BNC Fem.	±0.5 dB	70
73N50	100 kHz-4 GHz	N Male	BNC Fem.	±0.2 dB	75
74N50	10 MHz-12.4 GHz	N Male	BNC Fem.	±0.5 dB	145
74S50	10 MHz-12.4 GHz	SMA Male	BNC Fem.	±0.5 dB	165
75A50	10 MHz-18.5 GHz	APC-7	BNC Fem.	±1 dB	190
75N50	10 MHz-18.5 GHz	N Male	BNC Fem.	±1 dB	170
75S50	10 MHz-18.5 GHz	SMA Male	BNC Fem.	±1 dB	170




825 EAST MIDDLEFIELD ROAD • MOUNTAIN VIEW, CA 94043 • (415) 969-6500 • TWX 910-379-6578

Circle 230 on reader service card

Choose from the great family of HP strip chart recorders.

Hewlett-Packard, the great name in strip chart recorders, lets you choose from a complete family of high quality models. With proven performance in both laboratory and field, the HP recorder family includes general purpose lab recorders, battery operated portables, models with interchangeable plug-in signal conditioners, and recorders specifically designed for OEM users. Select from a wide choice of writing systems; capillary ink, disposable pen, thermal or electric. Operate them anywhere with confidence because HP recorders are backed by a worldwide sales and service organization. Send for complete technical details on the premium quality line from Hewlett-Packard, the great family of strip chart recorders. OEM discounts available.

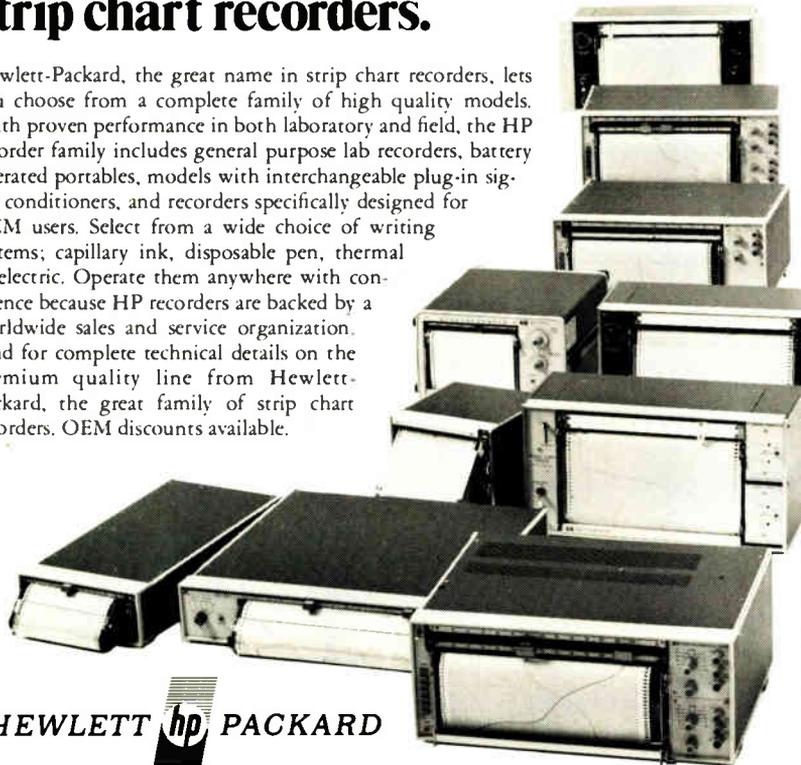

HEWLETT **hp** PACKARD

Sales and service from 172 offices in 65 countries.

1507 Page Mill Road, Palo Alto, California 94304

11702

230 Circle 44 on reader service card

New products/materials

Silver-epoxy adhesive Tra-Duct 2924 is a two-part conductive composition for critical high-temperature bonding and sealing applications. Usable up to 190°C, the material combines the thermal and electrical conductivities of silver with the adhesive properties of epoxy resins. It is especially recommended for the assembly and repair of electronic modules, integrated circuits, waveguides, radio-frequency shields, and similar applications in which conventional soldering techniques are difficult.

Tra-Con Inc., Resin Systems Division, 55 North St., Medford, Mass. 02155. Phone Jim Hart at (617) 391-5550 [476]

Electrically conductive inks for screening onto printed-circuit boards are solderable, thermosetting materials with a consistency suitable for use with 225-mesh nylon screens. E-Kote 3065 is an economical silver-alloy composition with a dc sheet resistivity of 0.2 ohm per square. E-Kote 3066 is filled with pure silver and, in the same 1-mil thickness, has a resistivity of 0.1 ohm per square.

Acme Chemicals & Insulation Co., Division of Allied Products Corp., P. O. Box 1404, New Haven, Conn. 06505. Phone Tony Bianco at (203) 562-2171 [477]

High-permeability nickel-iron, grain-oriented silicon steels, and other specialized magnetic metals are now available in several new lamination shapes for use in making transformers. Of particular interest to telephone-equipment manufacturers is the Long E 250, an improvement over the long-used EE250, according to the manufacturer. The LE250 has a magnetic path length of 2 inches. SGL Electronics, 300 Harvard Ave., Westville, N. J. 08093 [478]

A metal-cleaning agent called Clepo 146-E can be used to deoxidize and desmut aluminum and most of its alloys and to activate beryllium-copper and phosphor bronze before silver plating. The nonchromated, fluoride-free, moderately acidic formulation is designed for use at room temperature.

Frederick Gumm Chemical Co., 538 Forest St., Kearny, N. J. 07032 [479]

Gates introduces the future in energy cells.



There's now a new energy source that's a superb alternative: Rechargeable, sealed lead-acid batteries from Gates.

We call these batteries the future in energy cells. And for good reason.

They have all the product advantages you need plus economic advantages that may well give a new dimension to your product pricing.

Advantages: Gates Energy Cells are as compact as nickel cadmium or gelled type cells. And they are completely sealed, so that no acid vapor can leak out (they also include a self-sealing vent for extra safety). Gates Energy Cells provide low internal impedance for high discharge rates (more than 100 amps from the D cell and 100 amps from our X cell for short periods of time). And can be operated or stored in any position.

Gates Energy Cells offer great packaging

flexibility. In fact, our individual cell availability allows you to choose your own specific voltage (in 2-volt increments) and current, as well as configuration.

Just as important as what Gates Energy Cells have to offer is what they don't have to offer. Like outgassing problems. Or cell reversal. Or "memory" problems.

Because Gates Energy Cells are made from low-cost materials that are readily available, they're very high in watt-hr. per dollar value. Which means that if you specify them, you'll probably save your company more than a few dollars. And make yourself into something of a hero in the bargain.

To find out more about the future in energy cells, circle our reader service number or write us. We'll send you *free* literature containing features, application information, ratings and specifications. George Sahl, Gates Energy Products, Inc., 1050 S. Broadway, Denver, CO 80217.




**Where the
energy future is now**

World Radio History

Where can I get an AC-DC or DC-DC switching power supply in a modular, open frame or P.C.B. design, with a 5 year warranty at reasonable cost?

ETATECH

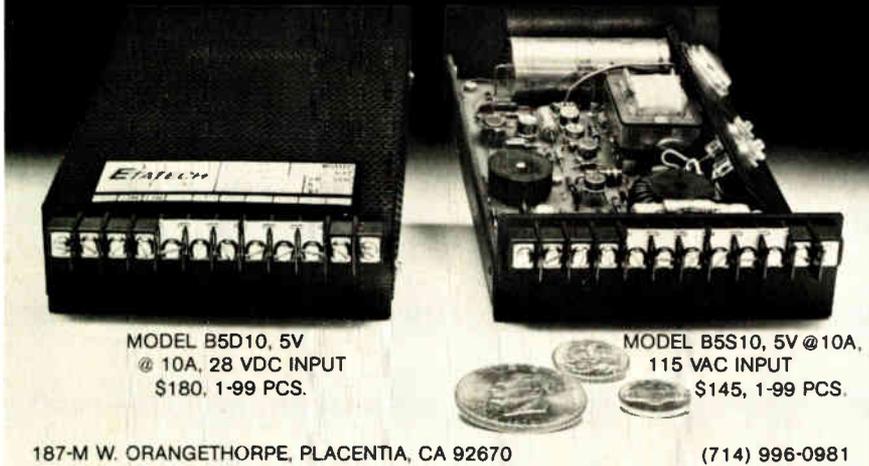


187-M W. ORANGETHORPE, PLACENTIA, CA 92670

(714) 996-0981

Circle 232 on reader service card

Staggered fingers let case-mounted semi's work harder in less space

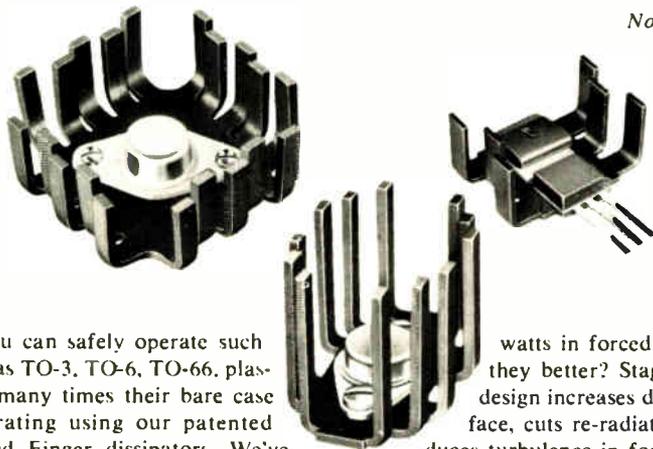

No. 23 of a Series

Now you can safely operate such devices as TO-3, TO-6, TO-66, plastics, at many times their bare case power rating using our patented Staggered Finger dissipators. We've got over 70 different models with dissipation capabilities ranging from 3 to 35 watts in natural convection, up to 125

watts in forced air. Why are they better? Staggered Finger design increases dissipating surface, cuts re-radiation, and produces turbulence in forced air. Send for catalog. IERC, 135 W. Magnolia Blvd., Burbank, Calif. 91502, a subsidiary of Dynamics Corporation of America.

IERC



Heat Sinks

232 Circle 45 on reader service card

New literature

Solid-state amplifiers. A detailed discussion of solid-state amplifier products is presented in a 32-page catalog. The amplifier families that are covered include TO-8, wideband, radar- and communications-band, and intermediate-power solid-state amplifiers, and medium- and high-power limiters. Watkins-Johnson Co., 3333 Hillview Ave., Palo Alto, Calif. 94304. Circle reader service number 421.

Microwave bandpass filters. Catalog no. 778 describes a full line of microwave bandpass filters, from helical resonators and coaxial cavities in the low range to rectangular waveguides in the high range. A detailed comparative summary, giving the filter series characteristics, is provided at the beginning. The rest of the catalog features detailed descriptions and performance data for each filter series. Lorch Electronics Corp., 105 Cedar Lane, Englewood, N. J. 07631 [422]

Making accurate measurements. Application note 13, explaining how a calibrated spectrum analyzer can be used for making accurate measurements of either amplitude-modulated or frequency-modulated signals, is available from Marconi Instruments, Division of Marconi Electronics Inc., 100 Stonehurst Ct., Northvale, N. J. 07647 [423]

Magnetic shielding. The availability of products and services for making magnetic shielding is detailed in a brochure from the Mushfield Co., 121 Madison Ave., Malden, Mass. [425]

Monochips. A line of linear and digital semicustom integrated circuits is presented in a 16-page full-color brochure. A new linear circuit, a 91-by-110-mil chip containing 460 components, designated the MO-F, and a newly developed n-channel metal-oxide-semiconductor digital chip, designated the MD-A, are highlighted. Characteristics of the various integrated components are provided. A separate section of the brochure contains information to

Dialight is your second source to C&K for miniature rockers and toggles...



Come to the people who've always been specialists in having more good ways to solve problems: Dialight. What we've done in indicator lights, illuminated switches, readouts and LEDs, we're doing now in miniature rockers and toggles.

This new Dialight family of switches, which comes in a full range of sizes is, we're proud to point out, all-American made.

When you consider all the configurations of styles, sizes, life and safety ratings, colors and mountings, you'll find there are literally hundreds of thousands of design combinations. Such a number of possibilities

can in itself be a problem, except that the new Dialight catalog is specifically designed to prevent confusion and help you quickly and easily find the most advantageous combination of features for your applications.

If you'd like to see what Dialight quality rockers and toggles can do for the looks, durability and economics of your products, contact us today for the Dialight "Meets Your Need" Book. Your free copy will include a list of stocking distributors in the U.S. and Canada.

DIALIGHT
A North American Philips Company

Dialight meets your needs.

Dialight, 203 Harrison Place, Brooklyn, N.Y. 11237 (212) 497-7600

Circle 233 on reader service card

Thin-Trim[®] capacitors



Tucked in the corner of this Pulsar Watch is a miniature capacitor which is used to trim the crystal. This Thin-Trim capacitor is one of our 9410 series, has an adjustment range of 7 to 45 pf., and is .200" x .200" x .050" thick. The Thin-Trim concept provides a variable device to replace fixed tuning techniques and cut-and-try methods of adjustment. Thin-Trim capacitors are available in a variety of lead configurations making them very easy to mount.

A smaller version of the 9410 is the 9402 series with a maximum capacitance value of 25 pf. These are perfect for applications in sub-miniature circuits such as ladies electronic wrist watches and phased array MIC's.

Johanson Manufacturing Corporation, Rockaway Valley Road., Boonton, N.J. 07005. Phone (201) 334-2676, TWX 710-987-8367.

Johanson


MANUFACTURING CORPORATION

234 Circle 234 on reader service card

New literature

help engineering personnel assess the cost effectiveness of the monochip approach. Interdesign Inc., 1255 Reamwood Ave., Sunnyvale, Calif. 94086 [424]

Thyristor gating. An 11-page report, "Thyristor Gating for Microprocessor Applications," discusses the use of some of the most common thyristors, triacs, and silicon controlled rectifiers in microprocessor-based control systems for appliance and

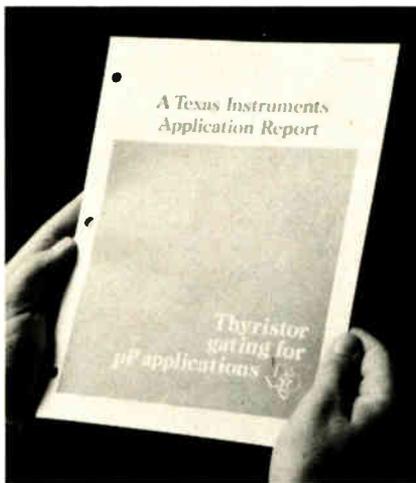


industrial-control applications. Microprocessor control of triacs, electrical isolation of gate drive, transient noise problems, and protection from circuit malfunction are discussed briefly as well. Texas Instruments Inc., Inquiry Answering Service, P. O. Box 5012, M/S 308 (Attn: CA-191) Dallas, Texas [426]

Piezoelectric accelerometers. An eight-page catalog discusses how internally preamplified piezoelectric accelerometers can replace charge-coupled piezoelectric accelerometers in low-temperature applications while simultaneously improving vibration measurement accuracy. Discussion of each model's individual capabilities and its most suitable engineering applications is provided along with a picture. An additional two-page chart enhances this discussion, providing complete electrical, mechanical, and physical data for each accelerometer. Accelerometer installation data is also given. BBN

The \$422.50* Microprocessor. Complete.

Are we bugs?

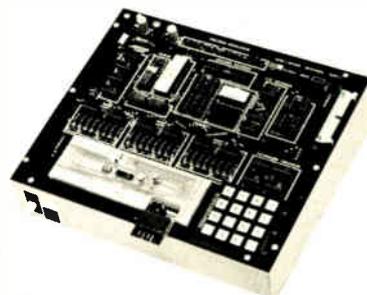

The MMD-1 is your ticket to the world of microprocessors. It's a complete microcomputer system. And just as important, it comes with the industry's most advanced instructional software - 700 pages by Rony/Larsen/Titus, authors of the famous BUGBOOK[®] series.

Without any prior knowledge of electronics you can be up and operating in a matter of hours. Teaching yourself everything from fundamental logic to sophisticated interfacing.

And you'll be learning on the most complete hardware package of its kind. Direct Keyboard Entry of Data . . . Built-in Power Supply . . . Direct Access to Output Ports . . . Monitoring of Address and Data Busses . . . Unique Breadboarding Facilities for Interfaces . . . and . . . more.


The MMD-1 is clearly the best buy in the industry. And it's available now at your nearest computer store. Stop in. Or write us for the store nearest you and a full 8 page illustrated brochure.

*Suggested resale price.

E&I[®]

E&I INSTRUMENTS, INC.

61 First Street, Derby, Conn. 06418
(203) 735-8774 Telex No. 96 3536



Circle 64 on reader service card

Tecnetics' broad range of power converters, the stepping stones to your product's success



SERIES DC-DC	OUTPUT POWER Watts	OUTPUT VOLTAGE VDC	INPUT VOLTAGE VDC	PRICE RANGE 1 to 9
3150-48	150	5-48	48	595
3100-48	100	5-48	48	495
3100-28	100	5-48	28	495
3050-48	50	5-48	48	425
3050-28	50	5-48	28	425
3025-48	25	5-48	48	395
3025-28	25	5-48	28	395
9525-48	25	5-24	48	250, 295, 365
9525-28	25	5-24	28	250, 295, 365
9584	10	5V-5KV	28	210-310
9589	6	5V-5KV	28	190-280
9567	3	5V-5KV	28	180-270
9583	1	5V-3KV	28	200-280
1205	25	5-28	12, 24, 28, 48	198
1000	10	5-24	5, 6, 12, 24, 28, 48	115, 125, 140
1600	6	5-24	5, 6, 12, 24, 28, 48	89, 99, 109
1300	3	5-24	5, 6, 12, 24, 28, 48	79, 89, 99
1100	1	5-24	5, 6, 12, 24, 28, 48	59, 65
HC	max. 3	5-300	5, 12, 20	49, 59, 69
HC, N, E	max. 3	5-300	6, 5, 12, 15, 20, 24, 28	49, 59, 69
AC-DC				
4200	200	5-48	115	845
4100	100	5-48	115	450
4050	50	5-48	115	425
4025	25	5-48	115	395
4100-3	100	5-48	115	450
4050-3	50	5-48	115	425
4025-3	25	5-48	115	395

Whether you are designing military hardware, space vehicles, communication equipment or other high technology products, the components you select can mean the difference between success or failure in the final product. That's why more and more design engineers are finding the power converters they need in the Tecnetics catalog.

Tecnetics offers the broadest range of state of the art DC-DC power converters, and we are now extending our expertise into 400 Hz power supplies. We have been developing and refining these products since 1959, so that today each one is unsurpassed in terms of efficiency, reliability, control circuitry and documentation.

The nearly one-thousand products in our catalog give the design engineer a wide choice of options and features including:

- Efficiencies up to 86% • MTBF up to 40,000 hrs. • Single, dual and triple outputs • Remote error sensing • Densities up to 1.65 watts per cubic inch • EMI protection • Mil spec environmental protection • Short circuit and overload protection • Input-output isolation


Send for our catalog today. You're sure to find a stepping stone to your product's success.

tecnetics® The Power Conversion Specialists

P.O. Box 910, 1625 Range Street, Boulder, CO 80302
(303) 442-3837 TWX 910-940-3246

Electronics Magazine Book Series.

Zero-risk trial offer.



1. Microprocessors
What you must know about available microprocessor technology, devices, information, 4th printing. \$8.95

2. Applying Microprocessors


2nd and 3rd generation technology. 26 detailed applications from data networks to video games. \$9.95



3. Large Scale Integration
Covers the basic technology, new LSI devices, LSI testing procedures, plus system design and applications. \$9.95

4. Basics of Data Communications

Includes 47 articles from Data Communications magazine covering more than 11 key areas. \$12.95



5. Circuits for Electronics Engineers

Contains 306 circuits arranged by 51 functions from Amplifiers to Voltage Regulating Circuits. Saves design drudgery. \$15.95

Electronics Book Series

P.O. Box 669, Hightstown, N.J. 08520



1. Send me _____ copies of "Microprocessors" at \$8.95 per copy.
2. Send me _____ copies of "Applying Microprocessors" at \$9.95 per copy.
3. Send me _____ copies of "Large Scale Integration" at \$9.95 per copy.
4. Send me _____ copies of "Basics of Data Communications" at \$12.95 per copy.
5. Send me _____ copies of "Circuits for Electronics Engineers" at \$15.95 per copy.

Discounts of 40% on orders of 10 or more copies.

I must be fully satisfied or you will refund full payment if the book is returned after ten-day trial examination.

Payment enclosed Bill firm Bill me

Charge to my credit card BankAmericard
 American Express Diners Club Master Charge

Acc't No. _____ Date exp. _____

On Master Charge only,
first numbers above name _____

Name _____ Title _____

Company _____

Street _____

City _____ State _____ Zip _____

Signature _____

New literature


Instruments Co., 50 Moulton St., Cambridge, Mass. 02138. Phone (617) 491-0091 [431]

Magnetic media measurements. A 12-page brochure describes successful techniques used in magnetic media measurements. It is geared for the user of high-speed computer and telemetry recording equipment. Described are typical patterns that cause stress to the system and detection of stress locations using the measuring system. Tau-tron Inc., 11 Esquire Rd., North Billerica, Mass. 01862 [427]

Chip capacitors. A reference handbook presents a detailed discussion of ceramic-chip capacitor technology. Topics discussed include elec-



Understanding Chip Capacitors

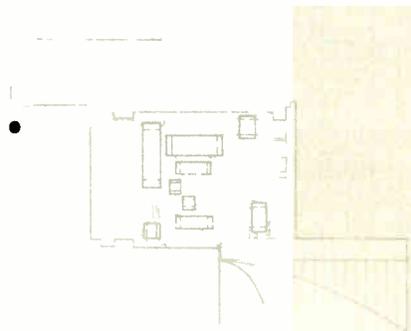

trical properties, classes of dielectrics, testing parameters, and choosing the correct chip. Johanson Dielectrics Inc., Box 6456, Burbank, Calif. 91510 [428]

Semiconductor products. A 148-page cross-reference and product guide is an excellent aid for those engineers who need a quick replacement for any semiconductor product. It includes how to locate the replacement device, how to verify the replacement device, and what to do if a cross-reference replacement is not found. The products cross-referenced are: paired complementary transistors, zener diodes, high-voltage components, field-effect tran-

\$24.95 PROBE?

You bet! Meet CSC's Multi-family Logic Probe 2.

Wherever you need fast, safe, accurate digital testing — you need CSC's new LP-2. It's a compact, enormously versatile circuit-powered unit that's become indispensable. As a level detector. Pulse detector. And pulse stretcher.

Easier to use. Set LP-2's switch to the proper logic family, connect two clip-leads to the circuit's supply, touch the probe to the node under test — and you get an instant picture of circuit conditions. Separate LED's indicate logic "1", logic "0", and all pulse transitions. And a 300K-plus input impedance insures minimum circuit loading.

At just \$24.95*, you don't have to think twice about owning the LP-2. Especially when you see how it simplifies testing, debugging and servicing all types of digital circuits. See your CSC dealer today. Or call 203-624-3103 (East Coast) or 415-421-8872 (West Coast) for the name of your local stocking distributor and a full-line catalog.

Logic Family Switch — TTL/DTL or CMOS matches Logic "1" and "0" levels for greater versatility. CMOS position also compatible with HTL, HINIL and MOS logic.

PULSE LED — Indicates positive and negative pulse and level transitions. Stretches pulses as narrow as 300 nanoseconds to full 1/10 sec. (10Hz pulse rate).

HI/LO LED's — Display level (HI-logic "1", LO-logic "0") of signal activity.

Interchangeable ground lead connection — Provides ground-side input connection via optional cables.

Interchangeable probe tips — Straight tip supplied; optional alligator clip and insulated quick-connecting clip available.

Plug-in leads — 24" supplied with alligator clips. Virtually any length leads may be connected.

Specifications

Input impedance better than 300K Ω
Thresholds (switch-selectable) **DTL/TTL** **HTL/CMOS**
 logic 1 thresholds (HI-LED) 2.25V \pm .10V 70% Vcc \pm 10%
 logic 0 thresholds (LO-LED) 0.80V \pm .05V 30% Vcc \pm 10%
Min. detectable pulse width 300nsec.



Pulse detector (PULSE LED) 1/10-sec. pulse stretcher makes high-speed pulse train or single events (+ or - transitions) visible
Input protection overload, \pm 25V continuous; 117 VAC for less than 10 sec.; reverse-polarity, 50V

Power requirements 5-15 volts Vcc; 30mA max.
Operating temperature 0-50°C

Physical size (l x w x d)
 5.8 x 1.0 x 0.7" (147 x 25.4 x 17.8mm)

Weight 3oz. (.085Kg)

Power leads detachable 24" (610 mm) with color-coded insulated clips; others available

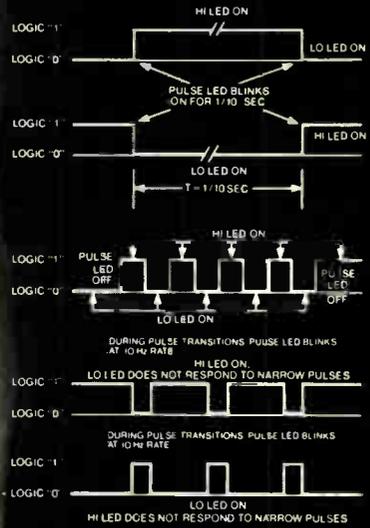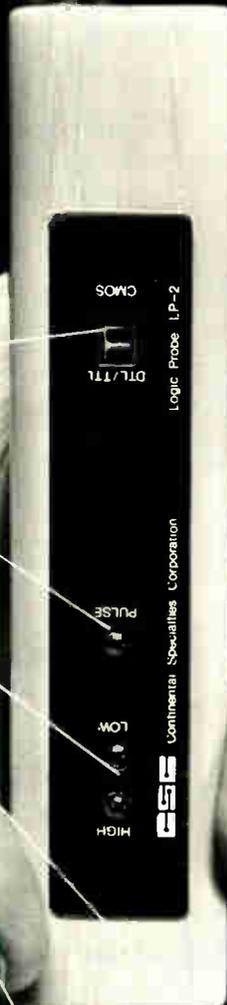

CONTINENTAL SPECIALTIES CORPORATION




44 Kendall Street, Box 1942, New Haven, CT 06509, 203-624-3103 TWX: 710-465-1227
 WEST COAST: 351 California St., San Francisco, CA 94104, 415-421-8872 TWX: 910-372-7992
 GREAT BRITAIN: CSC UK LTD, Spur Road, North Feltham Trading Estate, Feltham, Middlesex, England, 01-890-8782 Int'l Telex: 851-881-3669

Circle 237 on reader service card

*Manufacturer's Recommended Resale
 ©1977 Continental Specialties Corporation



Three to go!

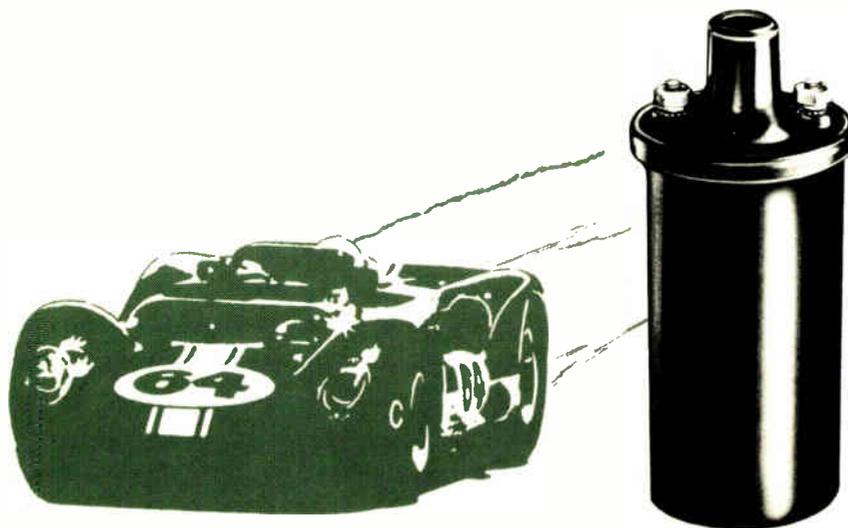

Plenco alkyds help race-tested Ampco ignition parts give high performance.



Rotor. Distributor Cap. Ignition Coil Top.

Offered in the "Tune-Up for Road America" Ignition Kit produced by Ampco Products, a division of Wells Mfg. Corp., Fond du Lac, WI, for sports race-car motor buffs and drivers.

You have to really check out to get *their* okay!

According to Ampco, Plenco does. The manufacturer chose our Plenco 1500 Series alkyd compounds in tan and blue for molding the three parts.

- "The compounds demonstrated greater molding latitude than most alkyd compounds," reports Ampco.
- "Proved to have excellent surface resistance to wet tracking."

- "Had dimensional stability plus good heat values."
- "Met stringent carbon tracking and electrical leakage tests."
- "Provided attractive finish complementing chromium plated functional parts."

If you're starting a tight race of your own, you may want to learn how Plenco experience and service can help get you going. Just flag us in at (414) 458-2121.

PLENCO
THERMOSET PLASTICS

PLASTICS ENGINEERING COMPANY
Sheboygan, WI 53081

Through Plenco research...a wide range of ready-made or custom-formulated phenolic, melamine-phenolic and alkyd thermoset molding compounds, and industrial resins.

New literature

sistors, and others. P. R. Mallory & Co., 3029 East Washington St., Indianapolis, Ind. 42606 [432]

Potentiometers. A line of single- and multi-turn potentiometers in wire-wound, conductive-plastic, or hybrid versions is described in a short-form catalog. Electrical, mechanical, and environmental specifications are provided for both military and commercial use. Duncan Electronics Inc., 2865 Fairview Rd., Costa Mesa, Calif. 92626 [429]

Density conversion. Engineers, designers, and draftsmen can easily convert material density to other units of measurement. A chart, which shows the conversion of density to specific volume and equivalent weight, is a quick reference. Some common measurements and their equivalents are given at the bottom of the chart. Technical Wire Products Inc., 129 Dermody St., Cranford, N. J. 07016 [430]

Ceramic substrates. An eight-page brochure provides illustrations for alumina and beryllia ceramic substrates, packages, and assemblies that can be designed to an engineer's specifications. Drawings and dimensions are given for nine types of leadless-inverted-device (LID) carriers. A separate section is provided explaining the advantages of the leadless inverted devices. Plessey Frenchtown, 8th and Harrison Sts., Frenchtown, N. J. 08825 [433]

C-MOS timekeeping. Complementary metal-oxide semiconductors have been used in the area of precision timekeeping for a while. A short history of this is provided along with the products available for the engineer in an eight-page brochure. Discussed are the functions of quartz-analog timekeeping systems including: the crystal-controlled oscillator, the frequency divider, and the electromechanical clock movement. A graph is provided if you want to design your own circuit. Solid State Scientific Inc., Commerce Dr., Montgomeryville, Pa. 18936 [434]

The Best
 Das Beste
 Les Meilleurs
 I Migliori
 Er Zijn Geen Betere
 Det Bästa
 Det Bedste
 Los Mejores
 Sarvottam
 最高
 The Best
 Das Beste
 Les Meilleurs
 I Migliori
 Er Zijn Geen Betere
 Det Bästa
 Det Bedste
 Los Mejores
 Sarvottam
 最高
 The Best
 Das Beste
 Les Meilleurs
 I Migliori

'VITRAMON' Capacitors.

The best in
any language.

The high quality of our capacitors is known the world over.

In fact, our customers have been calling our products "The Best" for nearly three decades.

We developed the first commercial monolithic capacitor, utilizing our patented porcelain dielectric, and later wrote the industry's first high-quality specifications for ceramic capacitors.

As the industry grew in sophistication and size, we maintained a leadership position based on our technological developments and product quality.

We were once a small Connecticut company which catered almost exclusively to our nation's military needs. But our high-quality products helped us to grow. Now we build products for hundreds of commercial applications world wide — and we have two plants in the U.S.A. and companies in England, West Germany, France, Australia and Japan.

In short, high quality capacitors have put us all over the world map.

Today, more than ever before, it takes advanced engineering, research and technology just to survive — and our capacitors are still ranked as "The Best."

In fact, we've recently written a technical paper to point out how our in-house capabilities, controls and processes helped us to maintain our leadership position. Simply write to us and we'll send you a copy.

Why not? We wrote the book on monolithic capacitors — and are adding important, new chapters every year.

Providing you with "The Best" is what we do — whatever language you speak.



Vitramon North America
 Division of Vitramon, Incorporated
 Box 544, Bridgeport, Conn. 06601
 Tel: (203) 268-6261

Vitramon Limited (London)
 Vitramon GmbH (Stuttgart)
 Vitramon France S.A.R.L. (Paris)

Vitramon Pty. Limited (Sydney)
 Vitramon Japan Limited (Tokyo)
 QCI Corporation (Farmingdale, N.J.)

Final Opportunity

Electronic Engineering Management Conference

San Francisco, Nov. 8

New York, Nov. 15

**If you hire, manage, motivate or educate EEs,
you cannot afford to miss this concentrated one-day conference**

In all of U.S. industry, no area of management is confronted by more critical challenge than the managers of electronic engineers. This Conference, sponsored by Electronics magazine, has been developed to help management meet that challenge.

Who should attend?

This is a conference which should be attended by those who have the responsibility for motivating, training, and utilizing the electronics engineer. This will include: Design and development managers, Engineering services managers, Basic research managers, Manufacturing and production managers, Training directors, Engineering school deans and professors, Career counselors and consultants.

What subjects will be covered?

Specialists from industry and education will focus on the hard practical matters which are faced by electronics engineers and those who manage them. The following are some of the questions which will be dealt with:

How to deal with the underutilized EE. The problems of shifting technologies. Career anxiety. Career motivation. The dual ladder. What should the EE consider when deciding to remain in technology—financial gain? career potential? What in-house programs have corporations developed to keep EEs updated?

**Mail application now.
San Francisco Conference is Nov. 8,
New York is Nov. 15**

Is competency assessment the wave of the future? How to identify the successful performer. Should performance appraisal become an integral part of the career development program. Is forced turnover an effective means of achieving high performance? Is it possible to quantify performance so the most valuable individual receives the best salary?

How do you get a company to recognize the problem of obsolescence—the corporation's and the individual's? The relationship between age and performance. Educating management to include the EE's career in its planning. How do you convince management that the project engineer is as important as the project?

The academic world: Can engineering schools stay up-to-date with current technologies, especially in the field of microprocessors? Is there too much theory and not enough practical application? Complaints of current

graduates—unqualified instructors, inadequate textbooks. What are electronic engineers' attitudes toward the engineering career? The impact of the microprocessor. What are the future career trends, both professional and technical?

The conference leaders

Seminars will be conducted by recognized authorities in their fields, including William O. Nilsson, corporate training and management development manager, Hewlett-Packard Company; C.R. Whischmeyer, director of education, Bell Laboratories; John D. Porter, organization development consultant, Lawrence Livermore Laboratory; George Klemp, director of research, McBer and Company; James D. Bruce, associate dean, School of Engineering, Massachusetts Institute of Technology; Kenneth S. Down, assistant dean and director, Stanford University; Gerald M. Walker, senior editor, Electronics magazine.

Send registration form to:
McGraw-Hill Conference & Seminar Group
1221 Avenue of the Americas—Room 3677 • New York, N.Y. • (212) 997-4930



THE ELECTRONICS CONFERENCE ON MANAGING ENGINEERS

The growing challenge of motivating, training, and utilizing the EE

____ San Francisco, November 8, 1977, Fairmont Hotel

____ New York, November 15, 1977, McGraw-Hill Corporate Headquarters

Conference fee: \$250 Academic fee: \$150

Name _____

Title _____

Company _____

Company address _____

Company telephone _____

Signature _____

Check one: Payment enclosed Please bill me directly Please bill company

Cancellation policy: Cancellations made less than seven days prior to the conference are subject to a \$25 fee. You may, if you wish, send a substitute in your place.

E 1 2 3 4 5

THE BIG BAND ERA IS HERE!

with our
new wide range
signal generator.

Whether your radio tunes to the "sweetest music this side of heaven" on the AM and FM bands, the busiest chatter on the CB band, or the weather report on the public service band; our new Model 103 signal generator meets all your test signal requirements ... and then some.

The generator combines a frequency coverage of 125 kHz to 175 MHz with five IF and RF sweep ranges. It has full external counting capability down to 5 Hz, accurately metered FM and AM

modulation, high RF output to +23 dBm, and phase lock on the 103B version.


The 6 digit readout has selectable resolution to as high as 1 Hz. It can also display the center frequency of each sweep range or the frequency of a built-in variable marker.

Boonton's Model 103 replaces two or more older signal generators, a counter, and a sweeper, giving you cost savings you hadn't thought possible since that other Big Band Era.

Don't just take our word for it. Call us or your Boonton rep (you'll find him listed in EEM, ECC, and the Goldbook). We'll arrange a demonstration, and bring along a record album of the top hits by the big bands of that other era. It's yours for allowing us to sound off a bit.

Call or write: Boonton Electronics Corp., Rt. 287 at Smith Rd., Parsippany, New Jersey, 07054, Phone (201) 887-5110.

BOONTON

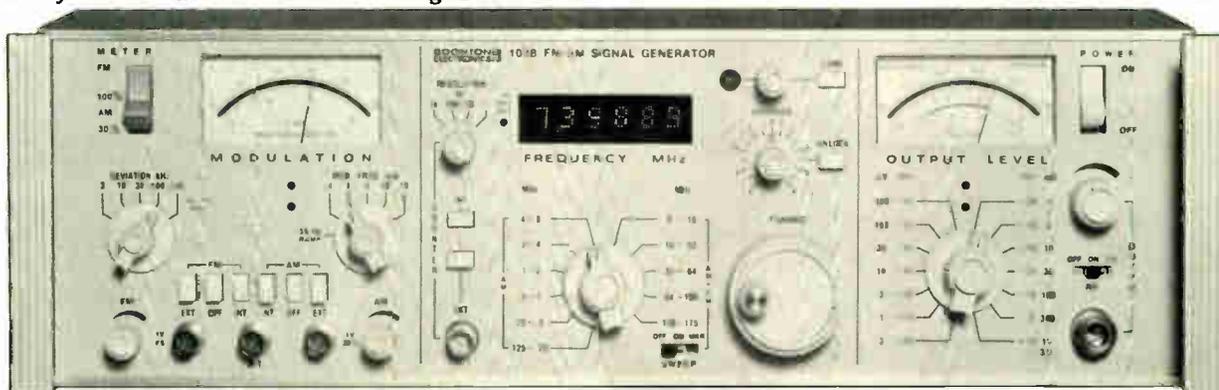

Classified section FOR ENGINEERING/TECHNICAL EMPLOYMENT OPPORTUNITIES

CLASSIFIED SALES REPRESENTATIVES

Atlanta . . . Joe Lane . . . 404/892-2868
 Boston . . . Holt Buchanan . . . 617/262-1160
 Chicago . . . Bill Higgins . . . 312/751-3733

Cleveland . . . Mac Huestis . . . 216/781-7000
 Dallas Mike Taylor . . . 214/742-1747
 Denver . . . Shirley Klotz . . . 303/837-1010
 Detroit Mac Huestis . . . 313/873-7410

Houston . . . Mike Taylor . . . 713/659-8381
 Los Angeles . . . Stan Kassir . . . 213/487-1160
 New York . . . Larry Kelly . . . 212/997-3594
 Philadelphia . . . Dan Ferro . . . 215/568-6161

Pittsburgh . . . Dean Genge . . . 412/391-1314
 San Francisco . . . M.E. Kenny . . . 415/362-4600
 Stamford Holt Buchanan . . . 203/359-2860
 XEROX 400 TELECOPIER . . . 212/997-6800

ENGINEERS

Colorado Career Opportunities

Controls Systems/Software Designer

Minimum two years experience in analog and digital circuit design. Requires programming experience in assembly language, preferably related to the Intel 8080. Would be involved in micro processor design on hardware & software, as well as interfacing with the real world.

Controls Systems/Circuit Designer

Minimum two years experience in analog and digital circuit design. Opportunity to work with a design team in design and development of controls, from establishment of specification through production and field evaluation.

Electronic Components Engineer

Create cost effective methods to improve component reliability from design through manufacturing; perform analysis on failed components and identify corrective actions, and provide technical assistance to quality assurance and manufacturing.

Electronic Reliability Engineer

Assist designers with reliability problems, create systems to improve design and field reliability, and perform reliability analysis, FMECA's, etc., with Electrical Design Engineers.

Electrical or Mechanical Engineer/ Magnetics Specialist

Engineer with several years experience in torque motors or similar products and associated controlled circuitry, to join a team developing a broad line of electrical actuators for industrial use. Analog and digital circuit design experience desirable.

Mechanical Engineers

Minimum two years design experience with engine or turbine controls or diesel engine, gas turbine or steam turbine design. Must have BSME or equivalent experience.

Become a member of our well established, stable organization which offers an outstanding profit sharing plan, benefit program and excellent working conditions, in a highly desirable Colorado locality. Salary commensurate with experience. Please send resume to Personnel Department, WOODWARD GOVERNOR COMPANY, P.O. Box 1519, Fort Collins, Colorado 80522, or call (303) 482-5811. We are an equal opportunity employer m/f.

WOODWARD

ELECTRONICS ENGINEER

Wanted by Univ. of Rochester Physics Dept., to develop new circuitry (in collaboration with research scientists), and to oversee operation of electronics shop. Candidates should have B.S. in E.E. or physics. Ideal opportunity for learning and growth for a recent graduate. For further information write:

PHYSICS DEPARTMENT
 Box E
 University of Rochester
 Rochester, NY 14627

We have been placing graduate **ENGINEERS** in **FEE-PAID** positions **THROUGHOUT THE U.S.** since '59. Over 1,000 client companies. We are graduate engineers working full-time for you. Send resume & salary history today or request confidential application.



ATOMIC PERSONNEL, INC.
 Suite L, 1518 Walnut St., Phila., Pa. 19102
 An Employment Agency
 For All Technical Fields

POSITIONS VACANT

Electronics Development Engineer
 North Carolina firm seeking EDE. Minimum 8 yrs. experience with major machining manufacturer in the development of electronic controls for cigarette making and packing machines. College graduate. Preferably PE. 7½ hour work day. Salary \$18-25. 5K. Minimum travel. Excellent company benefits. Equal Opportunity Employer. Piedmont, North Carolina location. Send resume to Mrs. Beverly Wilson, Job Service, Box 82, Winston-Salem, North Carolina 27102.

Georgia Tech Engineering Experiment Station—Needs Electrical Engineers to perform defense systems analysis/operations research in client-oriented environment. Computer Modeling and electronic system simulation experience desired. MSEE/MSIE required. Send resume to Mr. R.P. Zimmer, Engineering Experiment Station, Georgia Institute of Technology, Atlanta, Georgia 30332. An Equal Opportunity Employer.

Director of Manufacturing for growing telecommunications company, located in N.Y. Metropolitan area, with current experience in manufacturing and assembling of electronic components for computer equipment. Salary range \$40,000. Write in Strict Confidence, Executive Search, P-5836, Electronics.

EMPLOYMENT SERVICE

"How To Get A Job Overseas" 253 pages! Jam-Packed info. + Directory 300 firms \$5 Transworld, Box 90802-HR Los Angeles 90009.

RATES \$46 per advertising inch (1/8"). Commissionable.
SIZES 1/8" to 10" deep in widths of one column (1 1/8"), two (3 3/8"), three (5 1/8"), and four (7").
CLOSING Two weeks prior to mailing.
MAILING One week prior to issue date.
ISSUE DATE Every other Thursday.
AD ORDERS/BOX NUMBER ANSWERS Send to Electronics, Post Office Box 900, New York, N.Y. 10020.

FREE

Your dream job

We hope you're happy in your current position, but there's always that ideal job you'd prefer if you knew about it.

That's why it makes sense to have your resume on file in the Electronics Manpower Register, a computerized data bank containing the qualifications of career-conscious **ELECTRONICS** readers just like yourself.

You'll benefit from nation-wide exposure to industry firms privileged to search the system, and since the computer never forgets, if you match up with their job requirements you'll be brought together in confidence.

To take advantage of this free service, mail your resume to the address below. We'll do the rest.

ELECTRONICS MANPOWER REGISTER

Post Office Box 900
New York, N.Y.
10020

ENGINEERS: NEW GROWTH MEANS NEW OPPORTUNITY!

New long-term growth at Litton Systems Amecom Division means fresh career opportunity for ambitious engineers who seek professional advancement.

Check out these immediate career openings at all levels:

SOFTWARE SYSTEMS ENGINEERS

- ★ Real-time hardware controller subsystems
- ★ Real-time systems processing
- ★ Assembly, Fortran, micro-code languages

RF ENGINEERS

- ★ Microwave communications and receiving systems
- ★ High Sensitivity DF Receivers
- ★ Solid state microwave component design

ANALOG AND DIGITAL PROCESSING ENGINEERS

- ★ LSI application
- ★ High speed data conversion
- ★ Power supplies

ELECTRONIC WARFARE SYSTEMS ENGINEERS

- ★ State of the Art ESM/ECM
- ★ Signal processing

U.S. CITIZENSHIP REQUIRED. All positions.

Litton Systems offers excellent compensation, benefits, growth opportunity, and a professional work environment. Please send your resume including salary history in confidence to:

J. J. FitzGerald

Amecom Division

LITTON SYSTEMS, INC.

5115 Calvert Road
College Park
Md. 20740

An Equal Opportunity
Employer M/F.

TELECOMMUNICATIONS SYSTEM DESIGN ENGINEERS

- ★ Advanced digital subsystems including TDM
- ★ RF and analog subsystems including frequency synthesis and FDM techniques
- ★ Microprocessors and related real-time operating systems software
- ★ Voice switching systems

ELECTRONIC WARFARE PROCESSING —HARDWARE

- ★ Microwave subsystem design
- ★ Circuit design—RF, video, analog, high speed A/D converters
- ★ EW digital subsystem design—signal sorting, microprocessors/microcontroller design, computer interfacing
- ★ Project engineering/design supervision



Litton

Engineers – Analysts – Scientists **THIS IS THE AD YOU HAVE BEEN LOOKING FOR**

This is for real. The BDM Corporation, today's most dynamic professional services company in defense and civil systems analysis, planning, problem solving and policy research, is continuing its tremendous growth. This growth has resulted in a 30% average annual increase in sales during the last four years.

You can be a part of it, and share all the challenge and opportunity that this growth signifies. We are now seeking men and women in the following fields:

ENGINEERS

- Survivability/Vulnerability
- Communications
- Aeronautics
- Range Operations
- Instrumentation
- Electronic Warfare / Radar

COMPUTER SCIENTISTS

- Modeling
- Simulation
- Data Management

ANALYSTS

- Operations Research
- Military Operations
- Statistics
- Test Planning

PHYSICISTS

- Nuclear Effects
- Lasers
- Optics

There are immediate openings in metropolitan Washington, D.C.; Dayton, Ohio; Norfolk, Virginia; Huntsville, Alabama; Nutley, New Jersey; and other national locations for degreed candidates with 2 to 8 years of experience.

We are concerned with nationally significant programs where there is big work to be done, where your own contributions will matter and will be recognized and rewarded. If you are highly motivated, both personally and professionally, this is truly the opportunity you have been looking for. Rush your resume, including salary requirements to: D. P. Godding, The BDM Corporation, 7915 Jones Branch Drive, McLean, VA 22101. An equal opportunity employer m/f. U. S. Citizenship required.



Application Engineer

You will provide technical leadership for these circuits; A/D, D/A, sample and hold circuits, voltage-to-frequency, frequency-to-voltage, phase locked loops, CCD and others by assisting product design engineers in their use. Other responsibilities will include developing software for automated test systems to assure component quality and reliability and introduce new components and component technology.

Several years of recent experience in analog circuit design with a combination of the above devices is necessary. Experience with high level programming language is desirable. Effective technical communication skills required.

Salary is open. Benefits include liberal insurance, educational support and profit sharing programs.

Send detailed resume and salary history to Roy Epperson, TEKTRONIX, INC., P.O. Box 500, E72, Beaverton, OR 97077.

An Equal Opportunity Employer M/F/H

Tektronix
COMMITTED TO EXCELLENCE



Reliability Engineers

Immediate career opportunities exist at all experience levels in the following areas:

- Reliability Program Management
- Systems and Design Analysis
- Component Failure Analysis and Characterization
- System Reliability and Qualification testing

Degree required—BSEE or physics preferred; plus, experience in working with government space, avionics and surface electronic systems in any of the above areas is desirable.

You will participate in an excellent benefits program that includes, but is not limited to, a company-paid, ten-part insurance plan, two pension plans (one company-paid), personal investment plan, stock purchase plan and a 100% tuition refund program.

For consideration, please send resume, stating present salary, to:

R.A. Richmond, Dept. 302
Westinghouse
P.O. Box 1693
Baltimore, MD 21203

An Equal Opportunity Employer

Westinghouse

Engineering- Software Professionals

The New Era in Computer Controlled Telecommunications is Underway...

and that means exceptional career opportunity on the leading edge of a vast new technological frontier. GTE Automatic Electric is a world leader in this rapidly emerging new phase of one of the world's largest industries. You'll have the opportunity to advance your career in a highly professional environment . . . and working with concepts that are ahead of existing technology.

Highly visible, and promotable positions are available for software professionals who have above-average credentials in definition and design at advanced levels in the following areas:

- Distributed Processing Architecture
- Computer Aided Design & Development
- AD/DA Systems Interface
- Top-down Systems Design
- Data Base Systems
- Real Time Systems
- Systems Diagnostics
- Signal Processing
- Stored Program Digital Systems
- Telecommunication switching and control systems (microprocessor or large CPU controlled)
- Large scale on-line systems management and executives
- Simulation
- Application Software

If you have recent experience in one or more of these areas and a BS, MS, or PhD in Electrical Engineering, Computer Science, Math or the equivalent in technical qualification and accomplishment, we would like to tell you more about this major expansion in our long term research and development program. We are committed to maintaining our position of leadership in this exciting new field, and as a member of the GTE Family (ranked among the top R&D spenders in industry in 1976), can provide you with the support and resources to do the job.

For rapid contact,

CALL COLLECT (312)681-7729

weekdays from 8 am to 5 pm cdt

Or forward your resume, including recent salary history to: Manager of Technical Employment,
Dept. 471 A6

GTE **AUTOMATIC ELECTRIC
LABORATORIES**

400 N. Wolf Road
Northlake, IL 60164

An Equal Opportunity Employer M/F

TECHNICALLY SPEAKING, AT INTERSIL WE HAVE IT ALL TOGETHER.

If you're an electronics professional interested in joining the semiconductor's most exciting company, consider these job opportunities at our San Francisco Peninsula headquarters.

Linear Process Sustaining Engineer

Process, sustaining and development in diffusion and epi for LIC product lines. College degree plus minimum of 1 year in diffusion and epi process engineering.

Product Engineers

Failure analysis, customer returns, design, test and process interface, reliability and specification analysis. BSEE or physics plus at least 3 years product engineering experience.

—Metal Gate CMOS

At least 1 year in metal gate CMOS essential.

Bipolar Process Sustaining Engineer

Mask (photoresist) engineering for bipolar gold-doped product lines.

Reliability Engineer

MOS, CMOS and bipolar reliability activities including failure analysis on in-house life tests and customer returns, generating MTBF calculations and reliability reports for publications.

Test Engineer

Write and debug test programs for Teradyne and Fairchild test equipment for testing CMOS and bipolar products.

Test Engineer

Write test programs for testing new low power CMOS products; specification evaluation; maintenance of existing test equipment and associated software; some design of interface hardware for testers.

Layout Designer

Responsible for layout, design, composite and drafting of analog, CMOS, and MOS memories. At least 2 years semiconductor layout design experience is needed.

Interested candidates are invited to send resumes to INTERSIL, 10710 N. Tantau, Cupertino CA 95014. We are an equal opportunity employer m/f.

MOS Process/ Sustaining Engineers

Process and sustaining engineering for MOS memories. 3-5 years in MOS process engineering. Strong knowledge of silicon and metal gate processing.

—Masking

Requires photoresist background

—Diffusion

Requires CVD, evaporation and/or thin film background.

Senior CMOS Process Engineer

Establish and sustain CMOS silicon-gate fabrication line.

Test System Design Engineer

Responsible for the development of processor based instrumentation systems for use in characterization and automated production (parametric) testing of precision analog IC's. Additional responsibilities include systems documentation, parts specification and procurement, establishment of systems support capability, and training of technicians and junior engineers. Must be able to perform sophisticated software design and innovative hardware design with state-of-the-art analog and digital IC's.

Test Engineer

Design and development of a micro-processor based test system; design of interface hardware for Teradyne and Fairchild test equipment and ESI laser trimming systems; software design and programming of testers.

INSTRUMENTATION & CONTROL ENGINEERS BS-MSEE

Principal Engineer

to lead a group of EE's having total responsibility for on-line instrumentation in film manufacture. Requires leadership qualities and approximately 10 years experience in electro-mechanical instrumentation. New England—to \$30,000.

Senior Electronic Engineer

As project leader, will apply engineering and scientific principals and techniques to the design and development of microprocessor based systems and their application to process control. Requires minimum of 5-years related experience including digital logic design and firmware development. Upstate New York—to \$24,000.

Electronic Product Engineer

involves the development of new analog/digital products from design stage to production. Includes product improvement, performance problem solving and deficiency correction. Requires at least one year in product design or manufacturing engineering with training in computer or micro-processor desirable. New England—to \$22,000.

If you are interested in these or related opportunities, please reply in confidence to:

WETERRINGS & AGNEW

PROFESSIONAL PLACEMENT CONSULTANTS

425 MIDTOWN TOWER
ROCHESTER, NEW YORK 14604 • 716 454 3888

WHERE DO YOU FIT?

In today's job market, that is. One way to see if you're in demand is to check the employment opportunities contained in ELECTRONICS' Classified Section.

Another way to get a reading on your value is to place a blind (box number) Position Wanted ad there. The cost is low (only \$1.25 per line) and the results are often rewarding.

For more information call or write:

ELECTRONICS

Post Office Box 900
New York, N.Y. 10020
Phone: 212/997-2556

INTERASIL

Semiconductor
Division

Since 1969, we've been providing Confidential and Industry-Knowledgeable placement for Individual Contributor, Project Leader, and Manager Level Professionals. Personal contact by former Industry Personnel Professionals, with close ties throughout the local area, puts us in the position to find the right position for you. Listed below are Current and Immediate requirements of Local and National client companies. These openings represent a cross-section of Industries, company sizes and applications. Most positions are multiple.

if you have been thinking of investigating new opportunities, we urge you to contact us, in confidence, for individual discussions to particular opportunities in your career field, or to submit confidential resume with salary information for review. All interviews are by appointment. Client companies assume all fees. Professional resume preparation and career path counseling are provided free of charge. For those who find it inconvenient to call during working hours, our office will be open until 7:30 p.m.

ENGINEERING/ SCIENTIFIC SOFTWARE DEVELOPMENT/ PROGRAMMING

Contact: Robert Kleven

Mini Computer Programmers — Numerous Assignments in Real-Time, On-Line and Batch Environments. Positions involving Coding, Systems Design, Systems Test/Debug, and USER INTERFACE to various degrees, depending on company. DEC PDP-8, DEC PDP-11, DATA GENERAL NOVA/ECLIPSE, GA, HONEYWELL 716/LEVEL-6, RDS 500/1200, PRIME, or VARIAN/UNIVAC Experience Desired, but any 12, 16, or 32 Bit Experience Acceptable. ASSEMBLER, FORTRAN OR MUMPS LANGUAGES.

Salary \$12,000-\$24,000

Micro Processor Software Development — Several positions in Vendor, OEM, and End User/System House Environment, 1 + years Experience with INTEL, MOTOROLA, ZILOG, FAIRCHILD, or similar Micro Processor Systems. Application and Systems Software Development Opportunities available, including Micro Coding and Firmware Development.

Salary to \$25,000

Communications Systems Software Development — Challenging positions with Small, Medium and Large Companies. 1+ years Experience in Asynchronous/Bysynchronous Communications, Terminal Interface/Development and 2780/3780 Emulation. ASSEMBLER LANGUAGE.

Salary to \$16,000-\$32,000

Applications Programmers — Backgrounds in Coding and Implementation of Real-Time or On-Line Systems Utilizing Microprocessors, Minicomputers and/or Medium Systems. ASSEMBLY LANGUAGE AND FORTRAN. Background in RSX-11, RT-11 RSTS, RDOS, or other Real-Time Operating Systems highly desirable.

Salary \$12,000-\$24,000

Systems Programmers (Operating Systems Design) — Background in Systems Software Development. Strong ASSEMBLY LANGUAGE Background. Will develop portions of Real-Time Minicomputer/MICROPROCESSOR Operating Systems.

Salary to \$30,000

Diagnostic Programmers/Senior Diagnostic Programmers — Develop Fault Isolation Diagnostics for Real-Time Process Control, Communications and/or Graphics Systems. Several challenging positions available in both small and large firms.

Salary \$16,000-\$23,000

Text Editing/Composition Systems Programmers and Analysts — Several challenging positions to Develop new Minicomputer/Microprocessor Based Interactive Graphics Systems. DEC PDP-11 and/or DEC Systems-10 Experience desired.

Salary to \$23,000

Manager Special Systems Software — Challenging position in medium sized Graphics Computer Systems Firm.

Salary to \$32,000

Systems Engineers — Conduct Hardware/Software tradeoffs and Systems Integration functions, minicomputer environment. B.S.E.E./M.S.E.E. preferred.

Salary to \$25,000

Microprocessor Architects — Provide Technical Leadership in development of new High-Speed Microcoded Floating Point Processors, and Minicomputer/Terminal Systems. M.S.E.E./M.S.C.S. preferred.

Salary to \$40,000.

ELECTRICAL ENGINEERS

Contact: Robert Norton

Computer Architects — BS/MSEE and 3-5 years of experience in the definition and development of Minicomputer Systems. Will be a principal participant in developing a new family of computer systems.

Salary to \$40,000

Microprocessor Design Engineers — BS/MSEE with detailed CPU architecture and software background. Position entails logic design simulation and prototyping.

Salary to \$30,000

Systems Engineers — BSEE and extensive experience in the design and development of Mag Tapes, Discs, etc, and knowledge of diagnostic software. Binary Synchronous Communications background would be helpful.

Salary to \$25,000

Sr. Power Supply Design Engineers — BSEE and 3-5 years of Design and Development of regulated and non-regulated power supplies. The application of this work will be to build an in-house capability within a systems organization.

Salary to \$25,000

Digital Logic & Circuit Design Engineers — BSEE and some experience in Logic and Circuit Design, including a familiarity with DTL, TTL, CMOS, etc.

Salary to \$25,000

Computer Interface Engineers — BSEE with experience in Logic Design. Will work on team designing interface circuitry between Digital Computers and between Digital Computers and different types of Hardware.

Salary to \$25,000

Process Control Engineers — Degree in Engineering with background in Computer Sciences. 3-5 years of experience in the Application of Process Control Computers within the Petrochemical, Chemical, Pulp and Paper or Textile Industries.

Salary to \$28,000

Test Equipment Design Engineers — BSEE with Digital Design experience in developing prototype test equipment within a Systems Environment.

Salary to \$25,000

A/D-D/A Converter Engineers — 3-5 years of experience in Analog and Digital Design utilizing discrete components. Hybrid Thick and Thin Film Processes and Monolithic IC's.

Salary to \$24,000

Radar/Microwave Engineers — BSEE and a minimum of six years experience in the design of active microwave circuits involving radar transmitters and receivers.

Salary to \$30,000

nk Norton, Kleven and Co., Inc.

Industrial Relations Management Consultants
Three Fletcher Avenue, Lexington, MA 02173

Telephone (617) 861-1020

Representing Equal Opportunity Employers M/F
Member, Massachusetts Professional Placement Consultants

EAT•N Engineers

**Positions Available In Our Modern
Plant Located Within 30 Minutes Of
Milwaukee, Wis. And 1 Hour Of
Chicago, Il.**

Eaton, a FORTUNE 150 Corporation, is seeking:

*** Senior Project Inverter
Design Engineer**

Candidate must have 8-10 years experience in power electronics design/development with an emphasis on inverters. Must have proven achievements in inverter power circuit design and development. Some systems background desirable. BSEE Degree necessary. Must be capable of Senior Project Engineer responsibility in inverter design/development.

*** Power Electronics
Packaging Engineer**

Candidate must have 5-8 years experience in high power electronics packaging. Should be capable of handling the thermo, mechanical and electrical aspects of high power electronics packaging. Must be capable of handling project engineering level responsibility in packaging high power industrial electronics.

Qualified candidates will receive an excellent starting salary commensurate with experience plus one of the finest company paid benefit programs.

Please Submit Resume With Salary History
To Employee Relations Supervisor

**EATON Corporation
Industrial Drives Operation
Kenosha Division
3122 14th Ave.
Kenosha, Wis 53140**

An Equal Opportunity Employer M/F

EAT•N

SEMINAR INSTRUCTORS

Microprocessor-Minicomputers
Management & Applications
One to Five Day Sessions
In U.S., Canada & Europe
Send resume & dates available to:

SIR JOHN CO.
Box 7143
Overland Park, Ks. 66207
(913) 649-8952

ELECTRONIC DESIGN ENGINEERS AND TECHNICIANS

Design and develop custom electronic control assemblies and solid state sensors for use in a broad line of industrial applications. Products utilize a wide range of analog and digital components including microprocessors in conjunction with electromechanical devices.

Minimum Requirements:

**Engineers: BSEE Degree and 3 or
more years' circuit design
experience**

**Technicians: Associate Degree or
equivalent and 5 or more
years' industrial related
experience.**

Salary commensurate with education and experience. P&B is an electronic & electromechanical manufacturer and offers an excellent benefit package, good working conditions and high growth rate. Please submit resume and salary requirement to:

**AMF INCORPORATED
POTTER & BRUMFIELD DIVISION
200 Richland Creek Drive—Princeton, Indiana
47671
Attn: Peggy A. Michas**

An Equal Opportunity Employer M/F

We're Looking For Exceptional Talent

We've openings for both hardware and software people, engineers and programmers capable of innovative multidisciplinary design. You will play key roles in developing our ambitious new digital business system, a pioneering effort with strong emphasis on human interface engineering. We offer you exposure to the entire range of current electronic technologies and expect you to be proficient in at least a few of the following disciplines:

digital systems architecture
network architecture & protocols
common carrier interfacing
logic system design
circuit design
language design
hardware/software partitioning
displays and keyboards
A-D/D-A conversion
signal processing
RF transmission techniques
data communication
microprocessor design
fault-tolerant design
performance measurement

Our dynamic West Coast group is rapidly expanding and offers unusual opportunities for advancement. If you're ready for this kind of challenge, please send your resume to

Burroughs Corporation



**Attention: Barbara Rausin, Dept. E-1027
460 Sierra Madre Villa
Pasadena, California 91109**

An Equal Opportunity Employer

MAKE YOUR
NEXT
MOVE A STEP
IN THE
RIGHT
DIRECTION



The road to professional fulfillment can be a real jungle. We can help you find the right path. Our affiliation with

National
Personnel
Associates[®]

keeps us informed of opportunities in the ELECTRONICS industry from coast to coast as they occur. Together with over 190 associates, we offer our knowledge and expertise at no charge to you. Fees are company paid.

**CAREER SPECIALISTS/
ARIZONA, INC.**
P.O. Box 16262
Phoenix, Arizona 85011
(602) 967-8786

**THE MILWAUKEE CONSULT-
ING GROUP, INC.**
600 East Mason Street
Milwaukee, Wisconsin 53202
(414) 276-2414


**SOUTHERN MANAGEMENT
REGISTRY**
P.O. Box 4036
Charlotte, North Carolina
28204
(704) 372-7640

JIM KING & ASSOCIATES
Electronics Division
438 Gulf Life Tower
Jacksonville, Florida 32207
(904) 398-7371

**BRENTWOOD PERSONNEL
ASSOCIATES**
Electronics Division
1280 Route 46
Parsippany, New Jersey
07054
(201) 335-8700

**WETERRINGS & AGNEW,
INC.**
425 Midtown Tower
Rochester, New York 14604
(716) 454-3888

Quality of Life

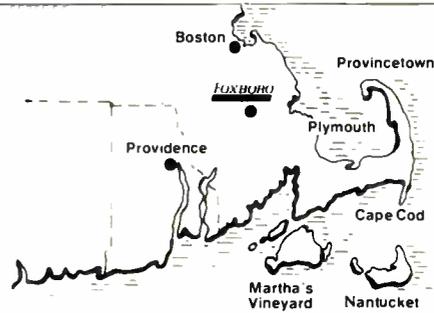

If the quality of life is as important to you and to your family as the progress of your career, we invite you to investigate both at The Foxboro Company.

We've been a New England institution for 70 years that today is a Fortune 500 Company with annual dollar shipments in excess of \$328 million and 10,000 employees worldwide; we are still breaking new ground in the design and development of microprocessor based and digital Process Management and Control Systems.

As big as we are we still care about our employees. Almost fifty percent of our openings are filled through internal promotions.

Because of our location, you and your family will be close to the cultural, educational and entertainment centers of Boston and Providence, and the winter and summer playgrounds of New England, adding to the quality of their lives in the Foxboro area.

Component Engineer

This individual will work closely with designers in the selection of components and will issue and maintain the Corporate Qualification Specifications and Qualified Vendor List for Electronic and Electro-mechanical Components. Will also seek out alternate component sources for existing and new components, obtain samples, perform acceptance test and vendor surveys. Will be responsible for conducting failure analysis of components, sub-assemblies and final assemblies and identifying the required corrective action.

BSEE required; MSEE desirable. Five years' experience in component/reliability engineering, with recent involvement in CMOS and LSI technologies. Failure analysis experience and circuit design analysis capability required.

Product Engineer (Electronic)

You will assist in the development of new analog/digital products and introduce them into production. Will implement design changes to correct design deficiencies, reduce costs, add features and resolve product performance problems. Will be responsible for documentation to support these efforts.

BS in Electrical Engineering. At least one to three years' experience in electronic product, design or manufacturing engineering. Experience or training in microprocessors or Computer Science is desirable.

Send resume, including salary history, to Mike Boyd, Dept. 10E, The Foxboro Company, 38 Neponset Avenue, Foxboro, MA 02035. Foxboro is an equal opportunity employer, M/F.

Development Project Engineer

(Electronic System Products)

Responsibilities will include: planning, scheduling and budgeting of project tasks; feasibility studies, design reviews, engineering documentation reviews on new products; technical supervision of engineers working on the project.

Requires BSEE (MSEE or MSCS) or equivalent with at least 6 years' experience in the design, test, evaluation and documentation of complex electronic system products. Design experience using complex ICS (both Bi-polar and MOS based) is essential. Familiarity with power and packaging problems with high speed digital systems is essential.

Senior Design Engineer (Logic & Microprocessor Based Systems)

Will be responsible for new product development including design of complex subsystems; technical supervision of engineers and technicians, feasibility studies; design and documentation reviews, etc.

BSEE (MSEE or MSCS) with at least five years' experience in the design, test, evaluation and documentation of complex electronic system products required. Experience with LSI IC's and Microprocessors is a requirement. Experience in the design of high speed complex digital controllers for peripherals, MMI devices and process I/O subsystems is essential.

FOXBORO

Software Development Engineer

LSI/CAD

The position requires a person with substantial experience in the design of advanced LSI circuits, with knowledge of CAD systems. Specific experience should include design rule verification of LSI circuits, testing of digital LSI circuits or experience with development of manual or automated layout systems.

BSEE or equivalent experience necessary as well as experience in programming scientific applications.

Salary is open. Benefits include liberal insurance, educational support and profit sharing programs.

Send detailed resume and salary history to Mary Walhood, TEKTRONIX, INC., P.O. Box 500, E85, Beaverton, Oregon 97077.

An Equal Opportunity Employer M/F/H.

Tektronix
COMMITTED TO EXCELLENCE

SEMTECH CORPORATION

Expanding manufacturer of quality power rectifiers offers excellent opportunity for:

MOS PROCESS ENGINEER PHOTORESIST

Participates in bringing into production a new generation of field effect power transistors.

Requires BS in Electronics or Physics plus a minimum of 3 years' experience in MOS wafer fabrication.

Salary commensurate with experience and ability. Excellent benefits including profit sharing.

Send resume with complete salary history to:

SEMTECH CORPORATION
652 Mitchell Road
Newbury Park, Calif. 91320

Equal Opportunity Employer M/F

DUNHILL OF PORTLAND brings client and candidate together with a unique marketing service. Full service to the electronics industry nation-wide. Contact **Keith Nyman**, Dunhill of Portland, Inc., 806 SW Broadway, Portland, Ore. 97205, (503) 224-1850.

We are exclusively employer retained.

THE ANSUL COMPANY NEEDS AN

ELECTRONICS DEVELOPMENT ENGINEER

Opportunity for degreed Electrical Engineer with several years experience in analog and digital design.


Responsibilities include: design and development of electronic peripheral circuits and devices for new automatic fire protection system; maintain, adapt and revise existing systems; act as advisory to our Manufacturing, Marketing and Quality Assurance people and coordinate contracts for product approvals with Underwriters Laboratories, Factory Mutual, etc.

You'll work at our world headquarters in Marinette, Wisc., an attractive small city on the shores of Green Bay. Here you'll find good schools (including a University Center), pleasant small city living and a rich variety of outdoor recreational activities. Ansul is a dynamic \$100 million international company producing fire protection equipment and specialty industrial chemicals.

Send resume and salary history to:

Eric R. Heiberg
THE ANSUL COMPANY
One Stanton Street
Marinette, Wisconsin 54143

AN EQUAL OPPORTUNITY EMPLOYER M/F
MINORITIES AND WOMEN ARE ENCOURAGED TO APPLY

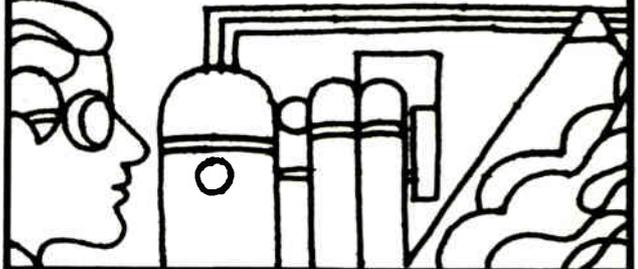

PHYSICIST

Printronix is a rapidly growing company located in Orange County, California, and has an opening for a Physicist with several years of practical experience in magnetic applications. A BS or MS degree is required with knowledge of permanent magnetic materials and characteristics for development of hammer mechanisms for computer printers.

We offer an excellent working environment, benefits, and professional growth opportunities.

Please send your resume to Cris Saunders:

17421 Derian Avenue
Irvine, CA 92714

An equal opportunity employer M/F

PRINTRONIX

RATES \$46 per advertising inch (1/8"). Commissionable.
SIZES 1/8" to 10" deep in widths of one column (1 1/8"), two (3 3/8"), three (5 1/8"), and four (7").
CLOSING Two weeks prior to mailing.
MAILING One week prior to issue date.
ISSUE DATE Every other Thursday.
AD ORDERS/BOX NUMBER ANSWERS Send to Electronics, Post Office Box 900, New York, N.Y. 10020.

PROJECT ENGINEERS

For a young and dynamic organization IN ISRAEL which extends its activity for consulting in Industrial application of:

COMPUTER CONTROL PROJECTS
PROCESS CONTROL SYSTEMS
MICRO COMPUTER TECHNOLOGY

Duties include advising and leading junior engineers.

Qualifications include initiative to promote new and advanced projects in Israeli industry.

Preferred 5 years of industrial experience.

Write to:

The Industrial Automation Institute
Israel Institute Of Productivity
4. Henrietta Szold St.
P.O.B. 33010
Tel-Aviv, Israel

SENIOR INSTRUMENTATION AND CONTROL ENGINEER

Instrumentation and control engineer with a minimum of five years experience in the design of analog and digital process control systems, utilizing electronic hardware, firmware and some software experience in the wastewater field preferable. Position is with an established consulting engineering firm in southeastern Michigan. Degree in electrical engineering required.

HUBBELL, ROTH & CLARK, INC.
P.O. BOX 824
BLOOMFIELD HILLS, MI 48013

Attention: Mr. Frank M. Barnes

WHERE DO YOU FIT?

In today's job market, that is. One way to see if you're in demand is to check the employment opportunities contained in ELECTRONICS' Classified Section.

Another way to get a reading on your value is to place a blind (box number) Position Wanted ad there. The cost is low (only \$1.25 per line) and the results are often rewarding.

For more information call or write:

ELECTRONICS

Post Office Box 900
New York, N.Y. 10020
Phone: 212/997-2556

COMMUNICATION EXPERTS

FORD SIGNALS A NEW CAREER

The Electrical and Electronics Division is gearing to meet the demands of the technological revolution in automatic communications systems. Ford Motor Company will continue as a leader in communication techniques and design. We are seeking an individual that can make immediate and significant contributions to our Advanced Entertainment Activity as a Principal Engineer.

QUALIFICATIONS

- BSEE/MSEE preferred
- Proven Cost effective innovation record
- At least 5 years experience in high technology communications engineering, i.e., digital frequency synthesis, phase lock loops, active and solid state filters, and custom LSI (digital and linear) application.
- RF signal experience necessary, exposure to other electronic control devices is preferred.
- 1-2 years supervisory experience.

Ford Represents exciting opportunity for this individual. The position offers an excellent salary and is located near Dearborn, Michigan. Benefits include fully paid life, hospital and disability insurances, dental and retirement programs, and lease car privileges. An attractive savings and stock investment plan is also available.

Please reply in confidence to:



Electrical & Electronics Division

Attn: Salaried Personnel
P.O. Box 2053
EEE Building—Room B-094
Dearborn, Michigan 48121

An Equal Opportunity/Affirmative Action Employer

■ Abbott Transistor Labs	6	DIT-MCO	186	■ Johanson Manufacturing Corp.	234
* Adret Electronique	62	■ Digital PDP	162-163	Kapusal Laboratories	226
■ Allen-Bradley	32	‡ Digital TPL	170	* Kennedy Company	189
Allied Chemical Co., Metglas Products	211	The Dylon Corporation	204	■ M. S. Kennedy Corp.	222
American Microsystems Inc.	66-67	‡ Eastman Kodak Co., Graphic Markets Division	15	■ Kepco, Inc.	5
American Optical-Scientific Instr. Div.	180	■ ECD Corp.	119	■ Lambda Electronics	193-202
AMF Potter & Brumfield	217	■ E-H Research Labs	182	■ Lear Siegler-Data Products Div.	79
■ Amp, Inc.	18-19	■ E&L Instruments	234	‡ Leesametric, Div. Metric Resources Corp.	155
Analog Devices	171	‡ Electro Rent Corp.	207	Litronix	205
Anritsu Electric Co., Ltd.	156	Electronic Navigation Industries	154	* LTT	60
Anseley (Thomas & Betts)	116	Elevam Electronic Tube Co., Ltd.	213	■ Magnecraft Electric	3rd C.
■ A P Products, Incorporated	253	■ Elgar Corporation	212	* Magneti Marelli	15E
Axiom	53	EMR-Telemetry	224	Mallory Capacitor Company	187
■ Ballantine Laboratories	100	Erie Technological Products	208	*■ Matsuo Electric Co. Ltd.	214
*■ Beckman Instruments	17E	Etatech Inc.	232	* Matsushita Electric Trading Company	183
Belden Corporation	144	Figaro Engineering, Inc.	8	McCoy Electronics Co.	158
■ F. W. Bell, Inc., Div. of Arnold Eng. & Allegheny Ludlum	158	■ John Fluke Mfg. Co., Inc.	115, 177	MDB Systems	253
Berg Electronics Div. of Dupont	157	Fujitsu America Inc.	9	Micro Power Systems	25
Boonton Electronics	241	Futek Corp.	216	■ Microswitch, Div. of Honeywell	229
Braemer Computer Devices, Inc.	213	Gates Energy Products Inc.	231	■ Microwave Power Devices	36E, 37E
* Burr Brown	7E	GCA Sunnyvale	164	Mitel Semiconductor, Inc.	50
* Carlo Erba SA	47	GEC M-O Valve	6E	Modular Computer Systems	30-31
■ Cambridge Thermionic Corp.	178	General Electric Miniature Lamp	210	Monolithic Memories	123
Centronics	138	General Electric, Plastics (Valox)	130	‡ Monolithic Systems Corporation	169
■ Cherry Electrical Products	147	General Instrument, Microelectronics	45	Mostek Corp.	20-21
Chomerics Inc.	166	General Magnetics	258	Motorola Communications & Electronics	124
■ Clairex Electronics	4th C	■ GenRad	65	Mupro Inc.	99
‡ C. P. Clare & Company	214	■ Grayhill, Inc.	165	Murata Mfg. Co., Ltd.	18E
Continental Rentals, Div. Continental Resources	8	‡ Grundy, Inc.	60	Neff Corporation	223
■ Continental Specialties	237	* Hamlin Inc.	32E	* NEOHM SPA	185
■ Control Data Corporation	137	■ Hewlett-Packard	1,2,230	Nichicon America Corporation	225
‡ CTS Corporation	47	■ ILC Data Device Corporation	35	Nikkel Electronics	203
■ Custom Electronics	184	Information Terminals Corporation	220	■ Non-Linear Systems, Inc.	208
‡ Cutler-Hammer Speciality Products Div.	189	Intech / Function Modules	213	■ North Atlantic Industries	52
■ Dana Labs	129	Intel Memory Systems	22-23	■ Opto 22	111
Data General Corp.	12-13	Intel-Microcomputer Components	70-71	* Oscilloquartz	24E
Data I/O Corporation	107	Intel Micro Computer Systems	86-87	‡ Panasonic, Industrial Div.	185
Datapro Research Corporation	254	International Electronic Research Corp.	232	Paratronics Inc.	26
■ Data Translation (Datation)	51	International Microcircuits Inc.	170	Pertec Computer Corp.	227
Harry Davies Molding Co.	255	Interswitch	176	* Pertec Ped	4E-5E
Deico Electronics, Div. Gen Motors	150-151	Intersil	54-55	* Philippe ELA	39E
■ Delevan Div., American Precision Ind.	188	Interstate Electronics	179, 133	* Philippe Elcoma	25E
■ Dialight	233	* Italtel / BIT	31E, 35E	* Philippe Industries	10-11
Digi-Data Corp.	255	Iwatsu Electric Company, Ltd.	190	*■ Philippe TMI	29E

How to save up to 50% on flat cable/connectors just by changing colors.

It's easy to spot new Great Jumpers™ and Great Daisy Jumpers™ from A P Products. Our ribbon is Electric Pink. And we're jumps ahead of any other flat cable/connector system.

We come to you fully factory assembled and tested. Our connectors are molded on and feature integral strain relief plus complete line-by-line probeability. Nothing could be easier to use. And we cost less.

Just name your jump and watch us hop to it. We offer the five most popular flat cable widths, solid or stranded Electric Pink or rainbow cable, single ended, double ended or daisy chained. And Great Jumpers are directly-interchangeable replacements for the jumpers you're using now.

Connect with the A P rep nearest you.

(203) 868-7748	(216) 333-4120	(314) 576-4111	(609) 429-4013
(205) 883-9630	(301) 484-5400	(414) 671-1945	(612) 922-7011
(206) 822-8223	(303) 420-4646	(415) 328-3232	(617) 272-8163
(212) 682-5844	(305) 295-5760	(416) 638-1322	(713) 960-1962
(213) 246-7119	(305) 564-3081	(512) 459-0761	(714) 560-6266
(214) 238-0408	(312) 298-4830	(513) 433-0966	(716) 633-7970
(215) 923-5195	(313) 642-0203	(602) 946-4437	(919) 788-8145

If no rep in your area call Toll-Free 800-321-9668

Faster and easier
is what we're all about.



A P PRODUCTS INCORPORATED

Box 110 • 72 Corwin Drive Painesville, OH 44077 (216) 354-2101 TWX: 810-425-2250

Circle 253 on reader service card

MDB SYSTEMS presents...The DEC PDP-11* Connection


GP Logic Modules · Peripheral Controllers · Communications Interfaces · Special Purpose Modules

New: MDB DR11C General Purpose Interface and MDL-11 Asynchronous Serial Line Adapter

MDB Systems products always equal and usually exceed the host manufacturer's specifications and performance for a similar interface. MDB interfaces are software and diagnostic transparent to the host computer. MDB products are competitively priced; delivery is usually within 14 days ARO or sooner.

Here are some MDB Systems connections to DEC PDP-11 computers:

- General Purpose Interfaces
 - 11C Module with 16 bit input and 16 bit output registers;
 - 20 user wire wrap positions.

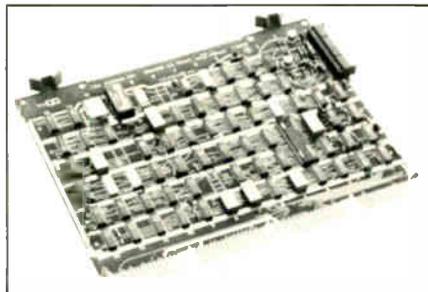

Pins and sockets optional.
1710 Module with 40 IC positions for user logic; sockets optional.

11B Direct Memory Access Module with 12 IC positions for user logic.

DR11C, a direct DEC equivalent. Digital I/O Module.

Wire Wrappable Module with 70 IC positions, sockets optional.

Unibus Terminator.

- Communications Modules
 - MDL-11 Asynchronous Line Adapter.
 - MDL-11W Asynchronous Line

Adapter with line frequency clock.

MDU-11 Synchronous Serial Line Adapter.

- Device controllers for most major manufacturer's
 - Printers
 - Card equipment
 - Paper tape equipment

All controllers are software transparent and use PDP-11 diagnostics.

Check first with MDB Systems for your PDP-11 computer interface requirements.

MDB also supplies interface modules for Data General NOVA* and Interdata computers and for DEC's LSI-11 microprocessor.

MDB

MDB SYSTEMS, INC.

1995 N. Batavia St., Orange, California 92665
714/998-6900 TWX: 910-593-1339

*TMs Digital Equipment Corp. & Data General Corp.

Micro processors

An in-depth review and workshop

A comprehensive, three-day introduction to microprocessors that will help designers, planners, managers and others to understand and utilize these low-cost "computers on a chip." The seminar examines currently available microprocessor hardware and software, provides hands-on design experience, and looks at future trends and developments. Designed for all persons active in or contemplating the use of microprocessor technology, the course addresses both the technical and management interests of today's forward-looking EDP practitioner.

A microprocessor development system will be available for hands-on use by attendees during the workshop, and at optional evening workshop sessions.

Upon completion of the course, the attendee will be knowledgeable of the state-of-the-art in microprocessors, and will have implemented simple programs on an 8080 development system. In addition, he should be better prepared to apply microprocessor technology to his applications.

At your place...

Fixed fee presentations in your facility

...OR OURS

Individual enrollments open for

- New York, Nov. 9-11
- San Francisco, Dec. 7-9

or
FREE COURSE OUTLINE
and full schedule of EDP seminars, call

800-257-9406

datapro

1805 Underwood Blvd., Delran, NJ 08075
In NJ, call 609-764-0100

Plastics Engineering Company	238	Teledyne Relays	17
Plessey Semiconductors	108	Teletype	143
■ Powermate	228	■ Telonic Altair	181
■ Precision Monolithics Inc.	68,69	Teradyne, Inc.	72
■ Princeton Applied Research Corp.	255	Texas Instruments, Components	174-175
• Procond S.P.A.	16E	Textool Products, Inc.	14
Program Data Incorporated	14E	• Thomson CSF Division D.T.E.	15
Pro-Log	38	T-K Enterprises	208
• Quest Automation	40E	• Triplet Corporation	26E
• Racal Thermionic Ltd.	2E-3E	■ TRW LSI Products	49
• Rediohm S.A.R.L.	59	■ TRW RF Semiconductors	88-89
Ramtek	74-75	⚡ TRW/UTC Transformers	183
Raytheon Co. Industrial Components	155	■ TRW Cinch Connectors	219
Reliability, Inc.	220	■ Union Carbide Corp., Parylene	221
Relicon Corporation	77	United Detector Technology	218
Rhone Poulenc-Chimie Fine	191	United Systems Corp., Sub. Monsanto	168
‡ Rockwell International	10-11	■ Universal Voltronics	7
Rockwell Microelectronic Device Division	120-121	Vacuumschmelze	178
• Rohde & Schwarz	1E	Victor Comptometer	206
Rotron, Inc.	160	■ Victory Engineering	176
Sakata Seisakusho	8	Viking Industries	167
Sangamo Data Recorder Division	152	Vitramon, Incorporated	239
• SEPA S.p.A.	22E	⚡ Wabash Electronics	59
• Sernice	19E-21E	■ Wavetek Indiana	103
• SGS ATE8	23E	• Wavetek Indiana	169
• Shell International Chemical	10E-11E	• Wavetek San Diego	207
• Siemens AG Munich	13E	Wilhelm Westermann	16
Siliconix	80-81	Wiltron Co.	230
■ Simpeon Electric	215		
• Sodeco	8E		
Sorensen, Div. of Raytheon	43		
• SPI ITT	38E		
Sprague Electric	56		
Standard Grigsby	159		
‡ Standard Microsystems	62		
■ Superior Electric	209		
Synertek	36-37		
Syston-Donner, Concord	27		
TEAC Corporation	259		
■ Tecnetica	235		
■ Tektronix	28-29, 95		
■ Tektronix	161		
• Tektronix Datatek NV	33E		
Teledyne Philbrick	214		

Classified and employment advertising

F. J. Eberle, Manager 212-997-2557

AMF/Brumfield	248
Ansel Company	250
Atomic Personnel	242
BDM Corporation	244
Burroughs Corporation	248
Dunhill of Portland, Inc.	250
Eaton Corporation	248
Ford Motor Company	251
Foxboro Company	249
GTE Automatic Electric Lab.	245
Hubbell, Roth & Clark, Inc.	251
Interall	246
Israel Inst. of Productivity	251
Litton Systems, Amecon Div.	243
National Personnel	249
Norton Kieven & Co., Inc.	247
Printronic	250
Rochester University of	242
Semtech Corporation	250
Sir John Co.	248
Tektronix	244, 250
Westinghouse	244
Whitings & Agnew	246
Woodward	242

■ For more information of complete product line see advertisement in the latest Electronics Buyers Guide
• Advertisers in Electronics International
‡ Advertisers in Electronics domestic edition

Davies

INSTRUMENT CASES and MATING COVERS with NO TOOLING COSTS



Break-resistant quality—excellent dielectric strength for insulation—high lustre finish requires no painting—in industry approved sizes that are ideal for housing test equipment, electrical or electronic controls.

STANDARD SIZES:

- No. 220—4" long x 2 7/8" wide x 1-9/16" deep
- No. 221—Mating cover for No. 220 case
- No. 230—5" long x 4-1/4" wide x 1-3/4" deep
- No. 231—Mating cover for No. 230 case
- No. 240—6-1/4" long x 3-3/4" wide x 2" deep
- No. 241—Mating cover for No. 240 case
- No. 260—6-3/16" long, x 5-9/32" wide x 2-5/12" deep
- No. 261—Mating cover for No. 260 case
- No. 280—8-7/16" long x 7-7/16" wide x 3-1/64" deep
- No. 281—Mating cover for No. 280 case

Samples and prices furnished promptly.

HARRY DAVIES MOLDING COMPANY
4920 W. Bloomingdale Avenue, Chicago, Ill. 60639

Circle 251 on reader service card

You don't miss a thing with a PARC 4513 FFT Spectrum Analyzer



- Compared to Brand X we provide:
- 5 times the frequency resolution
 - 5 times the processing speed for greater Real Time Bandwidth plus these other features:
 - spectral averaging
 - transient capture
 - dc-10 Hz to dc-20 kHz, eleven ranges
 - optional Real & Imaginary outputs all at a spectacular base price of \$8,150.

Write or call today, to get all the facts—so you can compare for yourself. Princeton Applied Research Corporation, P. O. Box 2565, Princeton, New Jersey 08540; phone: 609/452-2111.

P PRINCETON APPLIED RESEARCH
AN EG&G COMPANY

Circle 244 on reader service card

Their Computer; Our Tape Deck, Your Gain!

Still putting up with year-long delivery waits for tape decks from your minicomputer vendor? Digi-Data's compatible magnetic tape systems are yours in one fourth the time . . . and for half the price. Whether your minicomputer is the DEC PDP-11, the Data General Nova or Eclipse, or the HP 2100/21 MX, you have a practical alternative . . . and with extra choices in the bargain!

You can get the tape deck alone, or with formatter and computer interface. Specify 7-in., 8½-in. or 10½-in. reel size. Get different speeds, plus either NRZ or phase-encoded formats and total playback/record interchangeability with any other ANSI-compatible computer tape. Get all these advantages, along with the reliability and ease of maintenance of Digi-Data's complete minicomputer tape system, proven in thousands of installations. Now add our 2:1 price edge and 60-90 day delivery, and it's no wonder Digi-Data tops them all.

For a full product catalog and details on ordering single units or quantities, call or write today.



DIGI-DATA CORPORATION

8580 Dorsey Run Road, Jessup, MD 20794
(301) 498-0200

... First in Value!



Circle 255 on reader service card

ELECTRONICS REPRINTS

No. of
copies
wanted

New reprints

- ___ R-718 Display makers strive to refine their technologies 8 pp \$3.00
- ___ R-716 Special report—Japanese wave in semiconductor technology 24 pp \$3.00
- ___ R-714 Special report—active filter technology 6 pp \$3.00
- ___ R-713 Electron-beam lithography draws fine line 10 pp \$3.00
- ___ R-712 Special report—large-scale integration 16 pp \$3.00
- ___ R-710 Personal computers mean business 8 pp \$2.00
- ___ R-708 So you want to be a consultant 6 pp \$2.00

Charts

- ___ R-516 Electronic symbols \$2.00
- ___ R-213 Electromagnetic spectrum (updated 1976) \$3.00
- ___ R-326 Optical spectrum (6-page report and chart) \$3.00

Books

- ___ R-711 Circuits for electronics engineers: 306 circuits in 51 functional groups—Electronics Book Series \$15.95
- ___ R-704 Thermal design in electronics \$5.00
- ___ R-701 Applying microprocessors—Electronics Book Series \$9.95
- ___ R-608 Basics of Data Communications—Electronics Book Series \$12.95
- ___ R-602 Large Scale Integration—Electronics Book Series \$9.95
- ___ R-520 Microprocessors—Electronics Book Series \$8.95
- ___ R-011 Computer-aided Design 135 pp \$4.00
- ___ R-032 Active Filters 88 pp \$4.00

Other reprints

- ___ R-706 Low-cost dual delayed sweep method 6 pp \$2.00
- ___ R-705 Powering up with linear ICs 12 pp \$3.00
- ___ R-703 Special report—memories 16 pp \$3.00
- ___ R-702 World market report 1977 24 pp \$4.00
- ___ R-616 Special issue—technology update \$4.00
- ___ R-614 Power supply choices for sophisticated designs 8 pp \$3.00
- ___ R-612 Fiber-optic communications special report 24 pp \$3.00
- ___ R-610 Special report on hybrid-circuit technology 19 pp \$3.00
- ___ R-606 Special issue—microprocessors \$4.00
- ___ R-526 How reliable are today's components 16 pp \$3.00
- ___ R-600 World market report 1976 24 pp \$4.00
- ___ R-524 Special report on bipolar large-scale integration 12 pp \$3.00
- ___ R-522 Special report on power semiconductors 12 pp \$3.00
- ___ R-518 Special issue—productivity \$4.00
- ___ R-514 Eight ways to better radio receiver design 6 pp \$3.00
- ___ R-512 Design of circuits for dangerous environments 4 pp \$2.00
- ___ R-510 Bipolar advances with I²L microprocessor 8 pp \$2.00
- ___ R-508 Designing microprocessors with standard logic 12 pp \$3.00
- ___ R-506 The case for component burn-in 7 pp \$2.00
- ___ R-434 Designing systems with the standard interface 12 pp \$3.00
- ___ R-432 An update on communications satellites 8 pp \$2.00

Make check or money order payable to Electronics Reprints. All orders are shipped prepaid by parcel post. Allow two to three weeks for delivery. For additional information call (609) 448-1700 ext. 5494.

USE THIS PAGE AS YOUR ORDER FORM

Cost of orders \$ _____
 Plus 10% handling charge \$ _____
 TOTAL AMOUNT ENCLOSED \$ _____

Mail your order to:
 Janice Austin
 ELECTRONICS REPRINTS
 P.O. Box 669
 Hightstown, N.J. 08520

SEND REPRINTS TO

Name _____
 Company _____ Dept. _____
 Street _____
 City _____ State _____ Zip _____

Advertising Sales Staff

Advertising sales manager: Paul W. Reiss
 1221 Avenue of the Americas, New York, N.Y. 10020
 [212] 997-4371

Atlanta, Ga. 30306: Glen N. Dougherty
 100 Colony Square, 1175 Peachtree St., N.E.
 [404] 892-2868

Boston, Mass. 02118: Frank Mitchell
 607 Boylston St.
 [617] 262-1160

Chicago, Ill. 60611
 645 North Michigan Avenue
 Robert W. Bartlett [312] 751-3739
 Robert M. Denmead [312] 751-3738

Cleveland, Ohio 44113: William J. Boyle
 [716] 586-5040

Dallas, Texas 75201: John J. Uphues
 2001 Bryant Tower, Suite 1070
 [214] 742-1747

Denver, Colo. 80203: Harry B. Doyle, Jr.
 123 Speer Blvd. #400
 [303] 837-1010

Detroit, Michigan 48202: Robert W. Bartlett
 1400 Fisher Bldg.
 [313] 873-7410

Houston, Texas 77002: John J. Uphues
 601 Jefferson Street, Dresser Tower
 [713] 659-8381

Los Angeles, Calif. 90010: Robert J. Rielly
 Bradley K. Jones, 3200 Wilshire Blvd., South Tower
 [213] 487-1160

Minneapolis, Minn. 55436: Robert M. Denmead
 4015 W. 65th St.
 [312] 751-3738

New York, N.Y. 10020
 1221 Avenue of the Americas
 Michael J. Stoller [212] 997-3616
 Matthew T. Reseska [212] 997-3617

Philadelphia, Pa. 19102: Matthew T. Reseska
 Three Parkway
 [212] 997-3617

Pittsburgh, Pa. 15222: Matthew T. Reseska
 4 Gateway Center
 [212] 997-3617

Rochester, N.Y. 14634: William J. Boyle
 1175 Pittsford-Victor Rd., Pittsford, N.Y.
 [716] 586-5040

San Francisco, Calif. 94111: Don Farris
 Robert J. Rielly, 425 Battery Street,
 [415] 362-4600

Paris: Patrick Mouillard
 17 Rue-Georges Bizet, 75116 Paris, France
 Tel: 720-73-01

Geneva:
 1 rue du Temple, Geneva, Switzerland
 Tel: 32-35-63

United Kingdom & Scandinavia: Robert Ghey
 34 Dover Street, London W1
 Tel: 01-493-1451

Scandinavia: Andrew Karnig and Assoc.
 Kungsholmsgatan 10
 112 27 Stockholm, Sweden
 Tel: 08 51 68 70 Telex: 179 51

Milan: Luigi Rancati
 1 via Baracchini, Italy
 Phone 86-90-656

Brussels:
 23 Chaussee de Wavre
 Brussels 1040, Belgium
 Tel: 13-73-95

Frankfurt/Main: Fritz Krusebecker
 Liebigstrasse 27c, Germany
 Phone 72 01 81

Tokyo: Tatsumi Katagiri, McGraw-Hill
 Publications Overseas Corporation,
 Kasumigaseki Building 2-5, 3-chome,
 Kasumigaseki, Chiyoda-Ku, Tokyo, Japan
 [581] 9811

Business Department
Thomas M. Egan
 Production Manager [212] 997-3140
Carol Gallagher
 Production Manager International
 [212] 997-2045
Dorothy Carter
 Production Manager Domestic
 [212] 997-2908
Diane Ariotta
 Production Assistant [212] 997-2044
Frances Vallone
 Reader Service Manager
 [212] 997-6057

Electronics Buyers' Guide
H.T. Howland, General Manager
 [212] 997-6642
Regina Hera, Directory Manager
 [212] 997-2544
Diane Ariotta, Production Manager
 [212] 997-2044
Frances Vallone, Reader Service Manager
 [212] 997-6057

Classified and Employment Advertising
Frank Eberle, Manager
 [212] 997-2557

TEAC's Done It Again Open Reel Performance in the Cassette Mode

The TEAC R-81 has all the features you look for in a high quality data recorder, but with a big plus: 4 speeds.

Open reel data recorders offer 4-speed selection as a standard feature, but cassette types have been limited to the single speed mode.

The R-81 changes all that, giving you the convenience and simplicity of a cassette recorder along with all the options of 4-speed variability. High-frequency data can be recorded at high speed and reproduced at low speed—or low-frequency data converted to a higher frequency, for analysis by a general-purpose frequency analyzer.

There are 7 channels, too, one switchable for noise compensation (fourth channel), another for memos (seventh channel).

The R-81 also features the clean, rational styling that TEAC cassette tape decks are famous for. The front-loading configuration, with all the controls on the front panel, is ideally convenient for desk-top use. It also facilitates mounting with other equipment made to professional standards, as does the body size, which meets EIA specifications.

And the R-81 is ready to operate anywhere. In addition to AC (with adapter) and DC power sources, you have the full portable versatility of dry cell battery operation.

TEAC's done it again: advanced the art of data recording. And you're the winner.



TEAC


TEAC CORPORATION, 3-7-3, Naka-cho, Musashino, Tokyo, Japan

U.S.A.: B.J. Wolfe Enterprises Inc., 10760 Burbank Blvd., North Hollywood, Calif. 91610 England: International Instruments Ltd., Cross Lances Rd., Hounslow, Middx. W. Germany: nbn Elektronik Starnberg, 813 Starnberg, Max-Emanuel-Str. 8 France: Tekalec Airtronic S.A., Cite des Bruyeres, Rue Carle-Vernet 92 Sevres Holland: SIMAC Electronics, Veenstraat 20, Veldhoven Italy: A.E.S.E. S.R.L. Corso Lod., 47 20:35 Milano Norway: Rodland & Rellsmo A.S., Gladengveien 3A, Oslo 6 Sweden: Teleinstrument ab, Maltesholmsvagen 138, Vallingby Switzerland: Wenger Datentechnik, Bruderholzstrasse 45, 4053 Basel Denmark: Danbit, Plantagevej 23, 2660 Scolrod Strand Australia: Jacoby, Mitchell Ltd., P.O. Box 701 Kingsgrove, N.S.W. 2208

Solid State Sine-Cosine Synchro Converter

This new encapsulated circuit converts a 3-wire synchro input to a pair of d-c outputs proportional to the sine and cosine of the synchro angle.

- Complete solid state construction.
- Operates over a wide temperature range.



UNIT	DMD 1436-1	DMD 1430-1	DMD 1403-2	DMD 1361-6	DMD 1361-4	DMD 1193-4	DMD 1361-8	DMD 1446-1	DMD 1193-5	DMD 1193-6	DMD 1361-10	DMD 1472-2
L-L SYNCHRO INPUT (VRMS)	11.8	90	95	90	11.8	11.8	11.8	11.8	11.8	11.8	11.8	90
FREQUENCY (Hz)	400	400	60	400	400	400	400	400	400	400	400	60
FULL SCALE OUTPUT (VOC)	±10	±10	±3	±3	±3	±10	±10	±10	±10	±10	±10	±10
OUTPUT IMPEADANCE	<1Ω	<1Ω	<1Ω	<1Ω	<1Ω	<1Ω	<1Ω	<10Ω	<1Ω	<1Ω	<1Ω	<1Ω
L-L INPUT IMPEDANCE	>10K	>30K	>5K	>30K	>5K	>5K	>5K	>10K	>5K	>5K	>5K	>5K
REFERENCE VOLTAGE (VRMS)	26	115	115	115	26	115	26	115	115	115	26	115
ACCURACY SIN/COS (+25°C)	±6MIN	±6MIN	±6MIN	±6MIN	±6MIN	±6MIN	±6MIN	±0.5%	±6MIN	±6MIN	±6MIN	±6MIN
FULL TEMPERATURE SIN RANGE ACCURACY COS	±15MIN	±15MIN	±15MIN	±15MIN	±15MIN	±15MIN	±15MIN	±0.5%	±15MIN	±15MIN	±15MIN	±15MIN
D.C. SUPPLY (VOC)	±15	±15	±15	±15	±15	±15	±15	±15	±15	±15	±15	±15
D.C. SUPPLY CURRENT	<30MA	<30MA	<30MA	<30MA	<30MA	<30MA	<30MA	<30MA	<30MA	<30MA	<30MA	<30MA
BANDWIDTH	>10Hz	>10Hz	external set	>20Hz	>5Hz	>10Hz	>10Hz	>10Hz	>2Hz	>40Hz	>5Hz	external set
SIZE	1.1x3.0 x1.1	2.0x2.25 x1.4	1.1x3.0 x1.1	1.5x1.5 x0.6	1.85x0.85 x0.5	2.01x2.25 x1.4	0.85x1.85 x0.5	2x2.25 x1.4	2x2.25 x1.4	2x2.25 x1.4	2.15x1.25 x0.5	1.1x3.0 x1.1
NOTES	-	dual channel unit	-	-	-	dual channel unit	-	dual sine output unit	dual channel unit	dual channel unit	-	-
TEMPERATURE RANGE	-40°C to +100°C	-40°C to +100°C	-40°C to +100°C	-40°C to +100°C	-40°C to +100°C	-40°C to +100°C	-40°C to +100°C	-40°C to +100°C	-40°C to +100°C	-40°C to +100°C	-40°C to +100°C	-40°C to +100°C

High Precision Analog Multipliers

PRODUCT ACCURACY (MCM 1519-1) ± ½% OF ALL THEORETICAL OUTPUT VALUES OVER FULL MILITARY TEMPERATURE RANGE OF -55°C TO +125°C. ZERO POINT ERROR FOR ANY INPUT COMBINATION IS ± 2MVRMS



Features:

- No external trims required
- Distortion free AC output over entire dynamic range
- Linearity, product accuracy and zero point virtually unaffected by temperature

- All units are hermetically sealed and are not affected by external fields
- High analog product accuracy and wave quality allows dual multiplier assemblies to be matched with 1% of point over the specified temperature range
- Full four quadrant operation
- Package size, power supply requirements and other specs. may be altered to your exact requirements at no extra cost.

Specifications:

- Transfer equation: $E_o = XY/10$
- X & Y input signal ranges: 0 to ±10V PK
- Maximum zero point error (X=0; Y=0 or X=±10; Y=0 or X=0; Y=±10): 2MVRMS
- Input impedance: Both inputs 20K min.
- Full scale output: ±10V peak
- Minimum load resistance for full scale output: 2KΩ
- Output impedance: 1Ω
- Short circuit duration: 5 sec.
- Frequency response characteristics (both inputs) 1% amplitude error: DC to 1200 Hz (min.) 0.5 DB Amplitude error: DC to 3500 Hz min. 3 DB point: Approx. 10K hz Roll off rate: 18 DB/octave
- Noise Level: 5MV PK-PK @ 100K Hz approx.
- Operating temp. range: See chart
- Storage temperature range: -55°C to +125°C
- DC Power: ±15V ±1% @ 30MA
- Dimensions: 2" x 1.5" x .6"

Type No.	Product Accuracy	Operating Temperature Range
MCM 1519-1	±0.5%	-55 C - +125 C
MCM 1519-2	±0.5%	-25 C - +85 C
MCM 1519-3	±0.5%	0 C - +70 C
MCM 1520-1	±1.0%	-55 C - +125 C
MCM 1520-2	±1.0%	-25 C - +85 C
MCM 1520-3	±1.0%	0 C - +70 C

Precision AC Line Regulator

Total Regulation 0.15% Max.



Features:

- Low distortion sinusoidal output
- Regulation control better than ten times superior to commercial AC voltage regulators transformer product lines
- No active filters or tuned resonant circuits employed resulting in immunity to line frequency changes
- 6.5 watt output level
- Small size

- Output set to ±1% accuracy — this includes initial set point plus line, load, frequency and temperature changes
- Foldback short circuit protection provided resulting in protection against overloads and short circuits of any duration
- Low profile package with straight pins makes the unit suitable for PC board mounting (unit is hermetically sealed)
- Transformer isolation between all power inputs and the outputs.

*Other units available at different power levels. Information will be supplied upon request.

Specifications Model MLR 1476-2:

- AC input line voltage: 115V RMS ±20% @ 400 Hz ±20%
- Output: 26V RMS ±1% (for any condition)
- Load: 0 to 250 MA, RMS
- Total regulation: ±0.15% maximum (any combination of line, load or frequency)
- Distortion: 2% maximum
- AC input line current: 100 MA, max. at full load
- DC power: ±15 V DC ±5% @ 15 MA, max.
- Phase angle: 1° max.
- Temp. Range: -40°C to +85°C
- Case Material: High permeability nickel alloy
- Terminals: Glass to metal hermetic seal pins


Circle 258 on reader service card

GENERAL MAGNETICS • INC

135 Bloomfield Ave., Bloomfield, New Jersey 07003 - Tel. (201) 743-2700

**A single, double, or
triple pole, compact,
printed-circuit-mounted,
immersion-proof, .310 high,
IC and μ P compatible,
off-the-shelf, reed relay.**

The MIP*

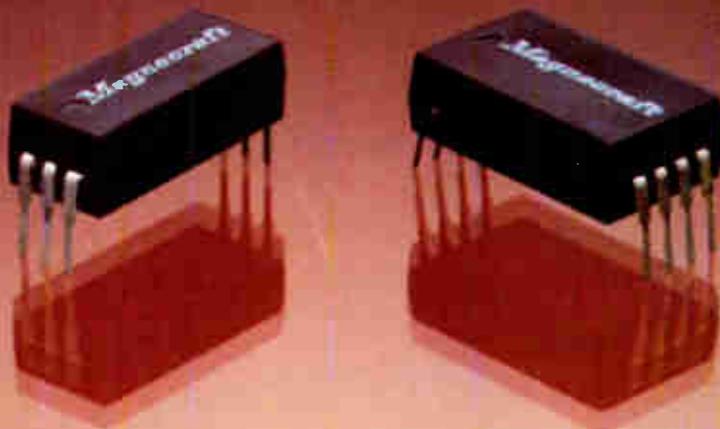

It's available in a variety of standard contact combinations . . .
single pole: 1 Form A, 1 Form B, and 1 Form C . . .
double pole: 2 Form A and 2 Form C . . . triple pole: 3 Form A.
And, both .1 and .150 pin spacing is offered.

The modular MIP is epoxy molded and completely immune to
standard printed circuit board cleaning processes.

Complete information and specifications are available in our
MIP Catalog. Write or call Magnecraft Electric Company,
5575 North Lynch, Chicago, Illinois 60630. 312/282-5500.

Magnecraft[®]
ELECTRIC COMPANY

*Molded In-Line Package

First in the Industry!

LEDs with PHOTOCONDUCTORS

in DIP OPTO-ISOLATORS

Clairex has developed these four LED/photoconductive cell isolators in the conventional dual-in-line package. They are truly an industry first! The inherent slower speed response of a photoconductive cell, as compared to a silicon detector, provides an ideal unit for

noise and transient immunity.

All four units have a photoconductive cell output capability of 250 volts PAC along with an isolation voltage of 1500 PAC. They also feature a minimum R_{OFF} of one megohm and guaranteed R_{ON} maximums

at I_f biases of 16 ma and 1 ma respectively.

The CLM 50 and CLM 51 incorporate a GaP LED with a photoconductive cell for both linear and logic functions. The CLM 60 and CLM 61 feature two GaP LEDs connected in inverse parallel in their input cir-

cuits to facilitate an a-c input signal to the isolator.

For complete details or any other assistance with your opto-electronic problems, call 914-664-6602 or write Clairex®, 560 South Third Avenue, Mount Vernon, New York 10550.

March 1977

LED- PHOTOCONDUCTOR DIP ISOLATORS

The CLM50 and CLM51 incorporate a GaP LED connected in series parallel and a photoconductive cell to provide a logic opto-isolator for both linear and logic applications. The photoconductive cell output capability of 250V PAC, isolation voltage of 1500V PAC and a minimum R_{OFF} of one megohm are guaranteed. Controlled resistances are featured at 16mA and 1mA respectively. Typical characteristics and typical circuit applications are shown.

TECHNICAL DATA

LED	CHARACTERISTICS	TEST CONDITIONS	Min.	Typ.	Max.	UNITS
I_f max.	Maximum forward current	$I_f = 16 \text{ mA}$		2.0	40	mA
V_f	Forward voltage	$V_a = 3V$	2.0	2.5	2.0	volt
I_r	Reverse current				250	μA DC or PAC
PHOTOCELL	Cell voltage				50	millivolts
V_{MAX}	Power dissipation	25° C	5K	1.5K	4K	ohms
R_{ON}	On resistance	$I_f = 16 \text{ mA}$ $I_f = 16 \text{ mA}$	1 Meg.			ohms
R_{OFF}	Off resistance	5 sec. after $I_f = 0$ 4 VDC on cell			500	ohms
t_r	Rise time	Time to 63% of final condition at $I_f = 16 \text{ mA}$			60	microseconds
t_d	Decay time	Time to 100%			1500	microseconds
V_{ISO}	Isolation				1	1000 VDC or PAC
α_{TEMP}	Cell temperature coefficient	$I_f > 1 \text{ mA}$			1	%/°C

CLAIREX ELECTRONICS
A DIVISION OF CLAIREX CORPORATION
560 South Third Avenue, Mount Vernon, N.Y. 10550

March 1977

DUAL LED PHOTOCONDUCTOR DIP ISOLATORS

The CLM60 and CLM61 incorporate two GaP LEDs connected in inverse parallel and a photoconductive cell. The photoconductive cell output capability of 250V PAC, isolation voltage of 1500V PAC, and a minimum R_{OFF} of one megohm are guaranteed. Controlled resistances are featured at 16mA and 1mA respectively. Typical characteristics and typical circuit applications are shown.

TECHNICAL DATA

LED	CHARACTERISTICS	TEST CONDITIONS	Min.	CLM60 Typ.	CLM61 Typ.	Max.	UNITS
I_f max.	Maximum forward current	$I_f = 16 \text{ mA}$		2.0	2.5	40	mA
V_f	Forward voltage	$V_a = 3V$	2.0	2.5	2.0	2.5	volt
I_r	Reverse current					250	μA DC or PAC
PHOTOCELL	Cell voltage					50	millivolts
V_{MAX}	Power dissipation	25° C	5K	1.5K	4K	1.75K	ohms
R_{ON}	On resistance	$I_f = 16 \text{ mA}$ $I_f = 16 \text{ mA}$	1 Meg.				ohms
R_{OFF}	Off resistance	5 sec. after $I_f = 0$ 4 VDC on cell				500	ohms
t_r	Rise time	Time to 63% of final condition at $I_f = 16 \text{ mA}$				60	microseconds
t_d	Decay time	Time to 100%				1500	microseconds
V_{ISO}	Isolation					1	1000 VDC or PAC
α_{TEMP}	Cell temperature coefficient	$I_f > 1 \text{ mA}$				1	%/°C

CLAIREX ELECTRONICS
A DIVISION OF CLAIREX CORPORATION
560 South Third Avenue, Mount Vernon, N.Y. 10550 (914) 664-6602

CLAIREX ELECTRONICS

A Division of Clairex Corporation

Circle 902 on reader service card

World Radio History