

# BROADCAST<sup>®</sup> ENGINEERING

# Radio

January 1994

**COVER STORY**



*Live from anywhere:*

Suitcase uplinks, audio codecs, portable audio production gear and Switched-56 service are all put together in this ultimate remote package, described by well-traveled network engineer Marty Kurcias. A sidebar describes the perils faced by a radio news crew covering relief efforts in Somalia.

**E**

**2**



**Software solutions for talk radio:**

Many talk radio stations are computerizing their call screening, but end up simply reinventing the wheel or learning things the hard way. Jack Callaghan, news/talk radio veteran and closet hacker, describes the latest in commercial call-management software that can make call screeners' — and talk show hosts' — lives a lot easier.

**M**

**E**

**10**



**Radio in Transition:  
Weather services for radio stations**

Plenty of new weather services have become available to radio stations. Radio meteorologist Sara Croke runs through the complete range in this exhaustive survey. Whatever your market size, you're sure to find something that gives you a weather edge on the competition, without busting your budget.

**M**

**14**

**EDITORIAL & NEWS** ..... 1  
**RE: RADIO** ..... 22  
**READER FEEDBACK** ..... 26  
**NEW PRODUCTS** ..... 28  
**CLASSIFIED & AD INDEX** ..... 36

**M**

= Management focus

**E**

= Engineering focus





# Join the Digital Revolution

Digilink by Arrakis is a digital audio workstation that does it all while increasing your profits.

You can replace your live on air cart machines while adding CD or satellite automation for nights or weekends. You can use just one workstation or network as many as 15 and send your spots & schedules in perfect digital between your studios. Add a Trak\*Star eight track digital audio editor for under \$5,500 and you can quickly and easily produce spots that would have taken forever

or been impossible with tape.

Digilink is also easy to schedule. You can use the standard Digilink traffic & CD scheduling system or import music

and traffic schedules from all of the most popular 3rd party programs.

Features like simultaneous Play, Record, & Network transfer; hard disk to hard

disk & CD crossfade; cart rotation; Autofill; Smart-squeeze; Macros; and incredible ease of use make Digilink perfect for live & automation studios.

Call or write today for more information on why Digilink is #1—with more than 600 workstations sold worldwide from Moscow, to Japan, to Barbados, to your own back yard.

- Replace Cart machines Live On Air plus add CD, Satellite, or Tape Automation
- On Air Base Price starts under < \$8,000
- 8 Track Editor base price starts < \$5,500
- Use just '1' Workstation or Network > 15

## Digilink

by Arrakis

The Digilink screen shown above is in Japanese text and is reprinted with permission of Orantek, the distributor for Digilink in Japan.

## Welcome to BE Radio

Whirlwind changes are taking place in the broadcast industry. Former enemies, the telephone and cable industries, are now joining forces to bring new and expanded services to their customers. Mega-merger media deals are almost daily headlines. While the media has focused primarily on the changes in the TV side of the business, significant changes also are taking place in the radio business.

Duopolies and local marketing agreements between radio stations have emerged as the equivalent of the highly publicized joint telco-cable projects and mergers. These and other changes have forced radio managers and engineers to reconsider how they do business.

In light of these events, the editors of *Broadcast Engineering* magazine felt it was time to re-emphasize our coverage and support of radio. The result of that effort is a new magazine, *BE Radio*. Published six times a year, *BE Radio* is devoted exclusively to the technical issues in radio broadcasting. It will provide radio managers and engineers the insightful and practical information they need to run profitable and growing businesses. If you're involved in radio, you need *BE Radio*.

Don't worry, we'll continue the *BE* tradition of providing accurate and useful information for both our engineering and management readers. The difference is that in *BE Radio* the focus is on the unique needs of our radio readers. With its easy-to-read style and an eye-catching graphical treatment, *BE Radio* is sure to become your favorite radio publication.

We hope you like *BE Radio*. You can let us know what you think through the *BE FAX*back line. Fax your comments to us at 913-967-1905 or e-mail at 4757418@MCIMAIL.COM. We look forward to hearing from you.

## NEWS

### Amati/AT&T tests IBOC DAB on-air

Amati and AT&T successfully tested their in-band/on-channel (IBOC) DAB format over the air at WPRB-FM, Princeton, NJ, in early January. The system performed well despite crowded spectrum conditions and ice storms during the test period. WPRB was chosen for its proximity to AT&T's development facility in Murray Hill, NJ, and its worst-case spectrum position, with relatively strong signals in both of its first-adjacent channels. (WPRB operates at 103.5MHz.)

Similar to previous IBOC-FM tests, a separate, low-power, linear RF amplifier was used as a transmitter for the digital signal. Its output was RF-combined with WPRB's existing analog FM transmitter's output and fed to a common (existing) antenna. However, these tests also noted surprisingly successful results when the station's FM transmitter was used for *both* the analog FM and digital signals (mixed into a composite signal by the Amati/AT&T exciter). Successful reception was possible in this mode with the FM transmitter running up to approximately half its rated power. The grounded-grid design of the 10kW FM transmitter used at WPRB may have contributed to this unexpected result, according to Amati engineers.

Reception quality was reportedly good, but limited by adjacent-channel interference as listening distance from the transmitter increased. As a result, the digital coverage was somewhat smaller than the primary analog FM coverage zone. Amati sources cite such coverage-matching as probably the greatest challenge for IBOC systems, because of the substantially lower level at which any on-channel digital signal must be transmitted. The Amati/AT&T system places multiple carriers at one or both edges of an FM channel (only one was used in these tests), 25dB below the FM carrier.

### USA Digital develops second IBOC-FM DAB system

USA Digital has announced that it plans to submit two separate IBOC-FM DAB systems to the EIA/NRSC digital radio tests that begin this month, in addition to an IBOC-AM format. The second FM system employs a significantly different implementation of IBOC technology, according to sources at USA Digital. The receiver for the new system is based on silicon architecture rather than the gallium arsenide processor required by the previous format's receiver. (See "Re: Radio," January 1993).

The proponent demonstrated its first IBOC-FM system in various stages of development at several trade events during 1992 and 1993, and showed its IBOC-AM system on the air for the first time at NAB '93. The second FM system has not yet been publicly demonstrated. All three formats have been developed under the umbrella title of *Project Acorn*, with the two IBOC-FM systems distinguished simply as System 1 and System 2.

# BE Radio

## Live from anywhere

By Marty Kurcias

*The Bottom Line: Radio broadcasters can now provide their listeners with high-fidelity audio from literally anywhere in the world by using a portable satellite telephone in conjunction with Switched-56 technology. Portable satellite telephony itself is not altogether new, but linking it with other technologies is the wrinkle that makes it valuable for remote audio backhaul. The increased fidelity can contribute immensely to the impact of remote radio broadcasts.* \_\_\_\_\_ \$

**T**he rules of the remote game are changing fast. Broadcasters can now take advantage of a number of new tools for backhauling quality audio with great flexibility and from practically any location. The right equipment and some practice are all you need.

A recent case in point involved a series of reports uplinked to National Public Radio headquarters in Washington, DC, from various locations in Somalia during coverage of relief efforts there. You can't get much more remote than that, and if it works from there, it should work from anywhere. The assembly and operation of a successful system requires some effort and learning on the part of the user, but the results can pay off handsomely.

### The hardware

The satellite phone used for these backhauls was the *MAGNAPhone MX2020P*, manufactured by Magnavox/Nav-Com and available in four configurations. The model employed on this remote was the top-of-the-line unit, called the Turbo HSD (High Speed Data). It consists of a transceiver unit (about the size of an orange crate), a dish antenna (which looks and folds up like an average-sized umbrella) and a control console (incorporating a keyboard, an LCD screen, a dial pad and a telephone handset).

For occasional use, it is more cost-

effective to lease rather than purchase a satellite phone. In either case, call-time also is expensive. International calls (standard voice-quality) typically run \$10 a minute, and HSD calls cost \$12 a minute. Nevertheless, the system is quite versatile, and for many applications it is worth the expense.

Among the hardware's features are a telephone, HSD, fax, telex and built-in thermal printer. The control console includes the speakerphone and handset, speed dial and directory and automatic call logging and printout. A menu-driven operating system displayed on the 4-line, 40-character LCD screen greatly simplifies and expedites setup and operation. A compass is provided for azimuth-finding. The system even has a help program that walks you through self-diagnostic tests when you encounter problems. Incoming and outgoing calls are accommodated on the satphone's two numbers, and a modem can be connected for access to and from computer systems. The whole system weighs approximately 90 pounds and fits into a single road case.

For high-quality audio transmission via HSD mode, an audio codec also is required for digital audio conversion and data-rate reduction. The codec provides real-time 7.5kHz mono audio at 56kbit/s or 64kbit/s and interfaces to the satphone via a V.35 port. (See Figure 1.)

### Now for the tricky part

Normally, satphones should not be operated in a foreign country without

the explicit permission of the governmental telecommunications authorities. In Somalia, this was a moot point because there was no government, although the service/hardware provider (Comsat) did provide the proper credentials to present if permission became an issue.

The signal was transmitted back to the United States via one of the INMARSATs (International Marine Satellites) which is used by ships at sea but also is accessible from most continental locations, including the contiguous United States. Four of them are hovering in geostationary orbit above the equator, and the bird of choice in this case was called INMARSAT Atlantic Ocean Region-East (AOR-East), at 15°W longitude. Because Somalia is virtually right on the equator and at about 45°E longitude, the aiming azimuth was 270° — due west. (The Indian Ocean INMARSAT to the east also could have been used, but only AOR-E has the HSD capacity required for 56kbit/s digital audio transmission.)

Because this system could access POTS (plain old telephone service) and Switched-56 networks, the procedure for filing involved first placing a regular POTS phone call to alert NPR's Washington headquarters that a report was ready for filing. An HSD call was then initiated to transmit the 56kbit/s digital audio feed. The HSD service provided in this case offered a voice-grade backfeed from the receiving end that could be used for coordination or for talk-back during

Kurcias is an audio engineer at National Public Radio, Washington, DC. Respond via the BEFAX back line at 913-967-1905.



# Systems with Style

When KABC/KLOS decided to rebuild from the ground up, they called Pacific Recorders & Engineering to provide its expertise in studio systems planning and execution. After all, when you're dedicated to winning, you don't gamble with success. PR&E has a proven track record of building the world's leading broadcast facilities for over twenty years. This record translates into the uncommon depth and breadth of experience which we bring to each new project. From news to rock, talk, or full-service, we're comfortable and conversant with all formats.

When you see the attention to detail, the design elegance, and the fanatical commitment to quality, you quickly realize why PR&E consoles and studio systems are found in nearly every leading broadcast facility in the nation.

But what may really surprise you is how much money you can save by working with us. That's right, save money. You see, we design and build so many world-class studio systems, we avoid the "surprises" by having the details down to a science. Why don't you give us the opportunity to work with you on your next studio project? We think you'll be pleasantly surprised at how easy it is to realize the operational efficiency and benefits of a genuine PR&E system.



Pacific Recorders & Engineering Corporation  
2070 Las Palmas Drive, Carlsbad, CA 92009  
Tel: 619.438.3911 • Fax: 619.438.9277 • GSA: GS.03F.2057A  
**DESIGNS THAT MAKE THE DIFFERENCE**

Circle (5) on Reply Card

2-way interviews. Text files were transmitted directly from laptop computers with built-in modems at 2.4kbit/s via the POTS link. A simple RJ-11 cable connected the laptop to the satphone's control console.

If you know what you are doing, setup takes approximately 15 minutes from road case to transmission. The transmitter stands on legs that unfold from underneath it. The umbrella dish unfurls and locks into place with the turn of several bolts. The control console can be tethered to the transmitter with a cable up to 500 feet long, which allows the unit to operate remotely.

Following a menu screen on the display window, you enter the latitude and longitude of your location, which you must determine from a map. (Mogadishu, Somalia is at 2°N, 45°E.) You then enter the Land Earth Station (LES) you want to downlink your transmission (Southbury, CT, in this case) and select the proper

INMARSAT bird. With this info entered, the control-console computer automatically computes the azimuth (compass direction) and elevation (angle to the horizon) at which to point the antenna.

An LED strength meter for the received signal is housed in the top surface of the transmitter, and you need merely shift the unit about until you get the strongest reading. Aiming does not have to be precise to achieve adequate signal strength for communication. The control console also displays the received signal strength numerically on its LCD screen.

Once the antenna is lined up on the satellite, the uplink transmitter can be fired up. It takes a few minutes for the uplink oscillator to stabilize, after which a green LED indicates that you are "locked" and bidirectional communications can begin.

Now you can start dialing. A standard domestic phone number — area code (AC) plus seven digits — tells

the LES to automatically route the call to the POTS network; the prefix "56" followed by a Switched-56 number (also AC plus seven digits) puts you on the Switched-56 network. The LES hands the call off to the Switched-56 network through a data service unit (DSU), the standard terminal hardware for that network. You can turn the unit on and off without repeating the aiming procedure. You just wait for the transmitter to lock onto the satellite and then dial away.

#### Powering

Power can be 120VAC or 240VAC  $\pm 10\%$ , 47Hz to 63Hz. The unit automatically senses and selects the proper voltage, so it's virtually impossible to blow it up by mistake.

In the field, the user can configure a number of alternate means to supply power if mains are not available, including portable generators and DC-to-AC inverters on batteries or fold-out solar-cell arrays. For this remote,

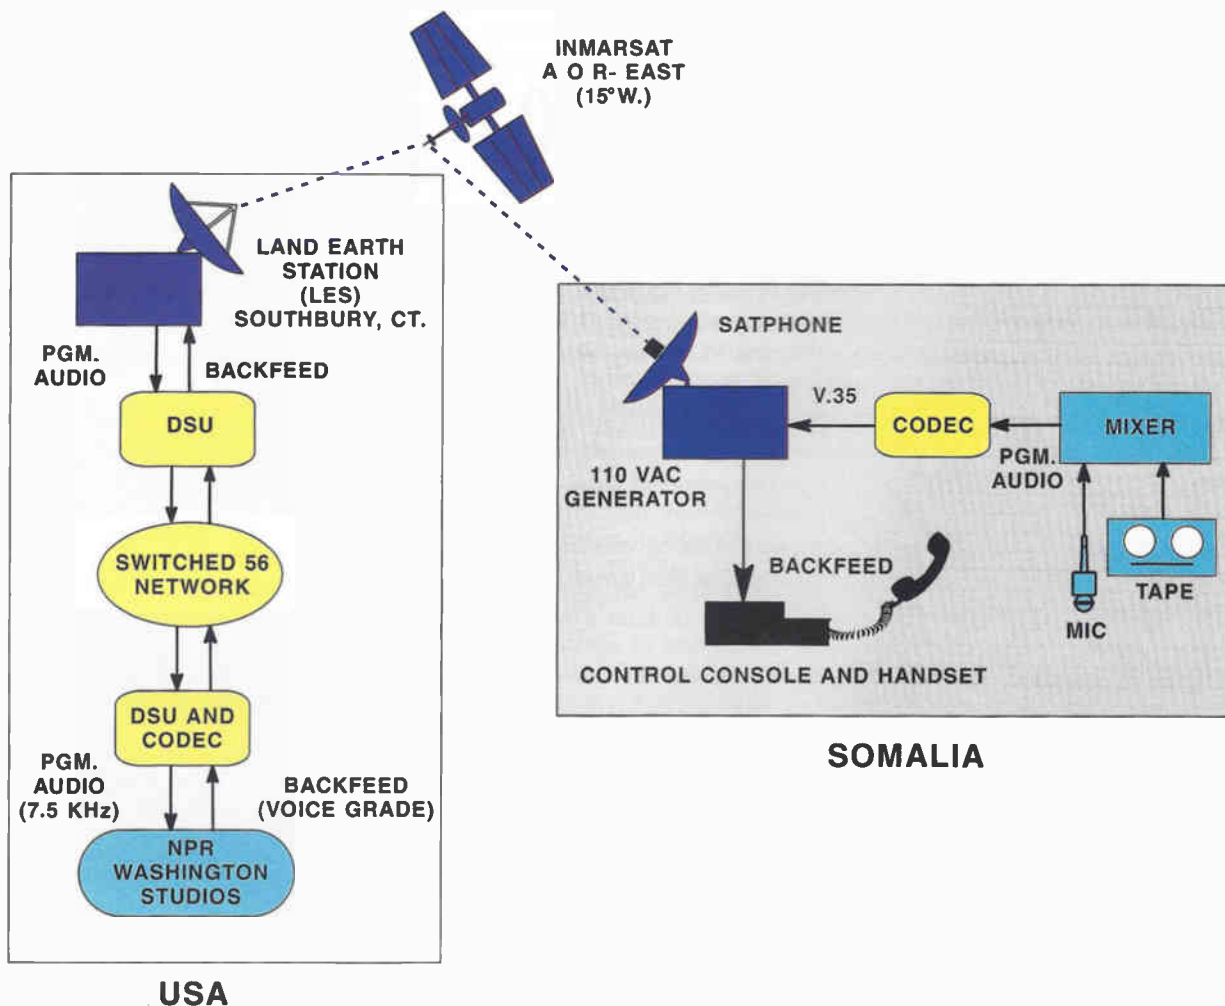


Figure 1. Block diagram of satphone signal path from Somalia to Washington, DC, via INMARSAT and domestic U.S. Switched-56 network.

# A 60 Second Look at the Last 25 Years in Commercial Radio.

*The DSE 7000.*

*The fastest  
digital*

*workstation*

*for radio*

*production.*

*Simplest to use.*

*And still the*

*best way to get*

*sixty seconds*

*of history*

*on the air.*

*Orban.*

*Celebrating*

*25 years*

*in broadcast.*



*The Eagle has landed...New York  
State Thruway is closed, man...And  
Pepsi's got a lot to give...Wake Up,  
Maggie, I think I've got something to  
say to you...Peace is at hand...Bye, Bye,  
Miss American Pie...I am not a crook...  
I shot the sheriff...Plop Plop, Fizz Fizz...  
Tramps like us, baby we were born to...  
Hi, I'm Jimmy Carter...Ah, Ah, Ah, Ah  
Stayin' Alive, Stayin' Alive...No  
Nukes...Are you better off than you  
were four years ago?...Have a Coke  
and a smile...She's got, Bette Davis  
eyes...Where's the beef?...Beat it!...Beat  
it!...Four more years...What's love got to  
do with it?...Gorby! Gorby!...We are the  
world, we are...The ultimate driving  
machine...The Dow fell over 500 points  
today...I'm Tom Bodette for Motel  
Six...we'll leave the light on for ya...  
That's "potatoo" with an "E"...You got  
the right one baby, Uh Huh!*

There is just no faster way to slice through 25 years of radio, or your next sixty seconds, than the DSE 7000. *The New Speed Of Sound.*

**orban**<sup>®</sup>

**H** A Harman International Company

© 1994 AKG Acoustics, Inc. Orban and OPTIMOD are registered trademarks of AKG Acoustics, Inc. All other trademarks are property of their respective companies. 1525 Alvarado St., San Leandro, CA 94677 USA Phone 1-610-351-3600 Fax 1-610-351-0500. In Canada contact: 514-596-3966

Circle (6) on Reply Card



Rear view of MAGNAPhone shows codec (black box) connecting to transmit/receive unit via V.35 cable. The black cable at center feeds audio from mixer to codec. The gray cable snaking off to the right connects the control console to the transceiver.

the crew brought along a 550W portable gas generator. It provided more than adequate power to the satphone, which draws 280W in transmit mode, 61W idle. The generator was powered by gasohol picked up during a Nairobi stopover on the way into Somalia. (Somali gasoline was expensive — especially to foreign journalists — and its purity was notoriously unpredictable. Adulterated fuel was responsible for many car breakdowns, which could be hazardous to your health if they occurred in the wrong place and time. In Somalia, that's almost any where, any time.)

#### Evaluation

The MAGNAPhone performed well throughout its use in Somalia. The few difficulties experienced in getting HSD calls through were apparently the fault of the domestic Switched-56 network or the hardware setup and operation at the receive end.

One caveat, however: Live-to-air interviews are a bit risky because the backfeed to the remote site can sometimes fail, leaving the field reporter unable to hear the studio host. Pre-taping interviews is, therefore, recommended.

The MAGNAPhone's ruggedness received high marks. It survived a trip halfway around the world and back, via air and via ground transport on some of the worst roads imaginable in rural Somalia. It also performed well under conditions of extreme heat and dust. Although it was usually protected from the elements and was covered at night with a tarp, there were times when it was required to

transmit in the middle of a thunderstorm, and it exhibited no problems. The transmitter housing heated up considerably during extended hours of use, but that is apparently normal.

The unit offers many useful features, such as speed dialing, call logging and user access codes. It also includes approximately 100 synthesized-voice announcements, which the system automatically plays when appropriate. (The system also can be set to play back *all* announcements in rapid succession, which is an effective means of annoying field producers.)

An HSD satphone and codec rig like the one described here is useful for quick, quality backhauling from remote locations where access to traditional communications is impossible

or unreliable. For good-sounding remotes from practically anywhere, data-reduced digital audio via HSD satellite telephone is hard to beat.

**BE**  
*Radio*

➔ For more information on remote digital audio transmission equipment, circle (312) on Reply Card. Also see "Coders and Decoders, Digital Audio" on p. 52, "Digital Terminal Equipment, Modems" on p. 54, and "Satellite T/R Components, Electronics" on p. 68 of the *BE Buyers Guide*.

## Engineer's journal: Somalia

*News crews faced some unique and serious challenges covering the Somali relief mission. Here are a few recollections from one radio engineer.*

Flying in to Mogadishu on a small charter from Nairobi, we learned that the main airport was closed, so our pilot headed for a small dirt airstrip about 10km outside of town.

There he set the plane down in the midst of a crowd of a hundred Somalis, many armed with automatic weapons. It seems that this airport was the designated landing site for the daily *qat* shipments from Kenya. *Qat* (or *khat*) is a plant imported from Kenya and Yemen, and its leaves and stems are chewed to produce a stimulating effect. It is the drug of choice throughout Somalia, sold and consumed openly.

These folks were all hoping that our plane was carrying *qat*, which it wasn't. The pilot started tossing our gear out of the plane as soon as we hit the ground, anxious to get back in the air quickly. One fellow came pushing forward through the crowd and said he was in charge of this airport — the local warlord, powerbroker or whatever. I stood watch over our pile of luggage and equipment, passing out cigarettes and trying to smile a lot.

For no small fee, we eventually engaged two pickup trucks with drivers and armed guards to transport us to Mogadishu. After a ride made harrowing by the road and the roadblocks, we arrived in the Somali capital.

#### Welcome to Mogadishu

Somalia had been pretty well laid waste by two years of civil war. No phone, no mail, hardly any water, no public utilities, wrecked vehicles and rubble everywhere. Certainly no banking system, and few shops or markets. Sanitation was ... well, it wasn't. Squallor was. The country was virtually de-

void of law and order. Armed gangs of men and boys ruled the roads, stealing and looting for the survival of their clubs. Those with the most guns wielded the most power and controlled the flow of food. Relief organizations were constantly looted for money and food stores intended for the starving. Sometimes a tin would even sell food back to the relief organization from which they stole it.

Let me repeat, relief organizations hired gunmen for their own protection. As journalists traveling around the city and countryside, we also had to contract for protection. One or more armed guards accompanied us wherever we went. Their arsenal consisted of light or heavy machine guns, pistols and clubs. They were known as "technicals," a term also used for vehicles with weapons mounted on them, which were always cruising the streets.

#### Bound for Baidoa

The first big mission for the Marines was to relieve the town of Baidoa, a town under siege by armed gangs. Covering this would be risky: At least a 4-hour trip on unsafe roads, and a good chance of being looted once we got there. But it looked like a good story.

We traveled in a convoy of three vehicles — seven journalists plus drivers, interpreters and guards. The guards picked up a belt-fed machine gun (an intimidating addition to our arsenal) and retrieved some more weapons from a cache in the bushes alongside the road outside of town. Displaying these weapons prominently was the key to safe passage along the




# FM SUPERGALAXY TRANSMITTERS FROM 2 kW TO 10 kW

## A MODULAR SOLID-STATE WORK OF ART

- APC (Automatic Power Control)
- Full microprocessor control
- MOS FET technology

**FM SUPERGALAXY 10-kW TRANSMITTER** ▶  
 Two 5-kW transmitters combined via a 3-dB coupler. 5 + 5 hot-standby configuration.

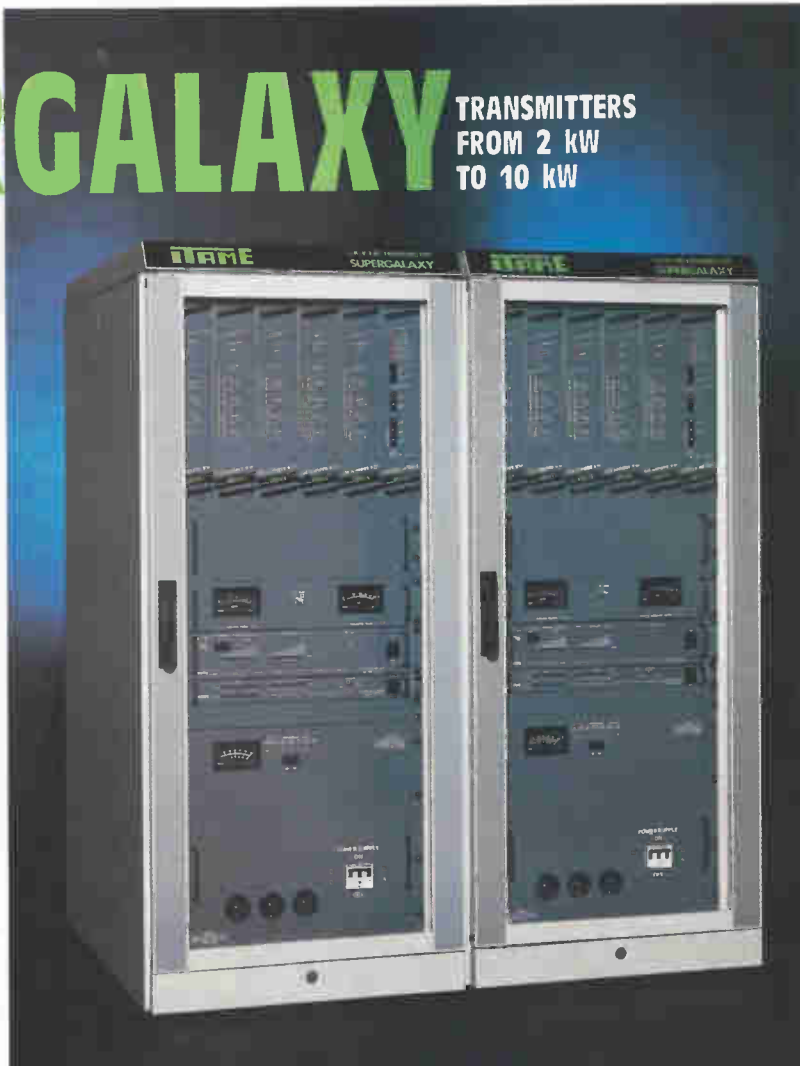

▲ BASIC 1-kW POWER AMPLIFIER MODULE.

◀ **FM SUPERGALAXY 2-kW TRANSMITTER:**  
 Two 1-kW amplifier modules, a combiner and the microprocessor control unit.

Because  
 broadcast  
 stations  
 keep  
 changing



c./Campezo 6 Pol. Ind. Las Mercedes  
 28022 MADRID SPAIN  
 Tel: (34-1) 747 74 44 - Fax: (34-1) 747 75 07  
 Telex: 28257 ITAME

- PRIMARY PRODUCTS MANUFACTURED BY ITAME:
  - FM transmitters or repeaters:
    - Solid state: GALAXY SERIES: 100 W, 300 W, 600 W, 1 kW and 2kW.
    - SUPERGALAXY SERIES: from 2 kW to 10kW.
    - Tube-type: 1 kW, 3 kW, 5 kW, 10 kW, 20 kW, 30 kW.
  - AM transmitters: 5 kW, 10 kW, 20 kW.
  - Analog and digital radio links in all bands from 140 MHz to 1700 MHz.
- TURN-KEY SERVICES ANYWHERE IN THE WORLD.

road to Baidoa. Anyone who thought they might be able to take advantage of us only had to do some quick arithmetic to see that they were outgunned.

The lesson of convoy travel was reinforced for us when we rescued the passengers of a disabled vehicle who frantically waved us down. They were members of a German TV crew, and we took them aboard one of our trucks.

#### **An industrial wage dispute**

Late one afternoon in Baidoa, some of our technicals began expressing their desire to renegotiate our original wage agreement with them. With our translator caught in the middle, we took our ground. They'd go away, then come back with a new argument, each time asking for even more money than the last. After several minutes of this, we told them the discussion was over and to leave us alone. We had work to do.

Well, several night. The discussion was over. The next thing we knew, several of our security guards were in our rooms brandishing weapons. The producer was on the phone with the network, and one of the guys took the phone and hung it up. At this, one

of the reporters jumped up, bravely planted herself next to the phone and vociferously screamed at them to get the — out. They were not moved, and we all encouraged the reporter to chill out.

At this point our translator was doing his best to try to convey to us that these guys were not going to take no for an answer. He seemed more scared than any of us. But when they set up a light machine gun on its legs in the doorway — pointing inside — it became abundantly clear that it was time to cut a deal.

We ended up offering them about three times the amount they had originally agreed to if they would leave us alone. The mythical "money now" appeared to them, and we breathed a collective sigh of relief when they drove away. The next day we contracted for security guards and transport.

Back in Mogadishu our field producer was a costal guard, the airport terminal and robbed of a tape recorder, mic and, worst of all, his notebooks containing much vital information. This robbery took place in full view of UN peace-keeping troops, who didn't lift a finger. One of our technicals gave pursuit and for his trouble was pistol-


whipped and stabbed in the side of his head. Our intrepid translator did a little private-eye work and was able to arrange for us to haul back the stolen items. Somewhere in the city, he related, was a room filled with purloined booty — cameras, tape recorders, wallets, purses and jewelry.

For some Somalis, the foreign news media represented a lucrative new source of income. If you couldn't get hired on as a translator, driver or technical, you could sell high-priced gas or rent rooms at New York rates. When troops began protecting food convoys, journalists also became the next best victims for looting. Expensive equipment, lots of cash on hand and the cavalier attitude of some of the journalists tempting targets. We couldn't be expected to be equipped for long, so they probably figured they may as well get what they could while it was good. People in desperate situations do desperate things. Somalia was nothing if not desperate. Our experiences were far from unique. Numerous journalists had similar encounters, some with more dramatic outcomes.


## Your Station Operates 24 Hours a Day So Do We

Meet the Continental Service Team. They are available 24 hours a day, 365 days a year to assist you with solutions to any technical service questions. These people have many years experience troubleshooting equipment in the field and are knowledgeable about all Continental transmitters and accessories.

**Continental offers the best service in the broadcast industry.**

  
Dave Chenoweth

  
Ken Branton

  
John Hutson

  
Jan Aerts

**Service 214-388-5800**



**Continental Electronics Corporation**

P.O. BOX 270879 DALLAS, TEXAS 75227-0879 214-381-7161 TELEX: 73-398 FAX: 214-381-4949

Circle (8) on Reply Card



THE WORLD'S  
OLDEST DISC RETRIEVAL SYSTEM

VS.

THE WORLD'S  
NEWEST DISC RETRIEVAL SYSTEM

No matter how technologically advanced an industry may become, it's always a good idea to keep things simple. Well, what could be simpler than programming audio by hand? The Pioneer CAC-V3200 Compact Disc Autochanger.



As a professional audio user, you'll be impressed that it provides access to 300 CD's with uninterrupted playback thanks to dual CD players. And they can be connected together to program thousands of CD's. You'll also appreciate that its built-in interface makes it pre-programmable for error-free playback by almost any computer. And its fade-in and fade-out capabilities, pitch control, and analog and digital outputs make it a remarkably ingenious piece of equipment.

However, if you just want to get practical about the whole thing, you can look at it this way, too. The CD Autochanger makes audio programming so absolutely efficient and error-free that your life will be made easier and your business could become more profitable. Which makes it seem rather impractical not to find out more.

Call Pioneer and ask about the CAC-V3200 Compact Disc Autochanger. You'll find it to be a simple decision that deserves a big hand.



 **PIONEER**  
The Art of Entertainment

## Software solutions for talk radio

By Jack Callaghan

**The Bottom Line:** *Talk radio is a popular format, but it's one of the more labor intensive to produce. The call-screening process is a critical, behind-the-scenes element of any talk show, and how well it's handled can really affect the quality of the program. Computers can help, but — as usual — only as much as their software lets them. Running the right caller-management software can have significant impact on how your talk show sounds on the air.* \$

**D**o something about those pieces of paper on the studio window!" The general manager was right. The sticky-notes-on-the-glass method was a pretty low-tech complement to our high-tech telephone system. Clearly it was time for a computerized solution, but what software to use?

Like many other people involved in talk radio, I had once written a computer program to allow a producer/call screener to communicate with on-air talent. My early custom program was rudimentary, prone to crash and not very user-friendly. I had visions of a spiffy call-screener program bouncing around in my head, but unfortunately had no time to write the code. Certainly somewhere there was a broadcaster who *had* made the time, written that program and was now selling it.

Although I suspect that many good call-screener programs have been written, only a few can be easily found in the marketplace. Supply and demand is probably to blame — it's hardly a mass appeal item. I've found three: *Call Screen Manager*, *Screener III* and *TalkStar*.

Each of the programs is written for use in the MS-DOS environment, and none is particularly resource-hungry. This is good news for stations on a tight budget, because generally even an old dusty XT-class computer will run them. All three programs provide

a method to build database information about callers. Two of them can talk directly to the telephone hybrid system using serial interfaces. They can all go on remote with you. One of them has been to the White House and another has been in the movies.

### TalkStar

The primary purpose for call-screening software is to feed the air talent with information about who's on the phone. *TalkStar* author Jim Radcliffe says that's what his customers ask for: "The basic information at a glance."

You may have already seen *TalkStar* — it was the software used by Eric Bogosian's character in Oliver Stone's movie "TalkRadio." (Radcliffe got an on-screen credit and a few subsequent customers from that.)

*TalkStar's* genesis was in the mid-1980s. Working at KPLX in Dallas, Radcliffe noticed sister station KLIF was using an off-the-shelf program designed for a different use to display caller information. Having already written the *Oasis Paperless Studio System*, Radcliffe set out to write a program to better serve the news talk format. Like the other programs, *TalkStar* allows a call screener to type in the caller's name, gender, age, topic, city and zip code. That information is displayed on a monitor near the talent. The age, gender, zip code, topic, time and length of each call also is stored to a database file. Retrieval is easily accessed by a hot-key. Reports can be sorted on the basis of time-of-

day, topic or demographics, but screening is halted while reports are run. It will display information for up to 10 telephone lines.

**The primary purpose for call-screening software is to feed the air talent with information about who's on the phone.**

The graphics version of the program is mouse-aware, features three different font sizes, a large digital clock face, and a distinct icon to indicate cellular calls. It will run on an XT, but Radcliffe recommends an AT-class or higher for database access. The graphics version requires an EGA monitor or better. A dumb terminal is all that's needed to take the program on the road, displaying data to on-air talent at the remote site via phone line connection to the host PC at the station. Because the data flow is only one-way (from station PC to remote terminal), data can even be sent to the remote site via SCA subcarrier. *TalkStar* sells for \$795, and support is free. Users will also receive one free software upgrade.

Of the three programs, *TalkStar* is the only one that doesn't handshake with the telephone system.

### Screener III

On the other hand, *Screener III* from Digitronics is quite chatty with your telephone interfaces, whatever their


Callaghan is news director and the designated computer expert at WKNR-AM, Cleveland. Respond via *BE's* FAXback at 913-967-1905.

I would like to see more coverage in BE Radio about: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



New Subscription    Renewal    Address Change    Information Request

Name \_\_\_\_\_

Title \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_

Phone \_\_\_\_\_

FAX \_\_\_\_\_

### FASTER ACTION!

If you have immediate interest in any products in this issue, write in the number(s) below and check all the appropriate boxes.

I am interested in these items	Immediate Need	Have Salesperson Call	Name Nearest Dealer	Send Literature	For Future Reference
#					
#					
#					
#					

**Circle reader service numbers below for more information**

21	31	41	51	61	71	81	91	101	111	121	131	141	151	161	171		
2	12	22	32	42	52	62	72	82	92	102	112	122	132	142	152	162	172
3	13	23	33	43	53	63	73	83	93	103	113	123	133	143	153	163	173
4	14	24	34	44	54	64	74	84	94	104	114	124	134	144	154	164	174
5	15	25	35	45	55	65	75	85	95	105	115	125	135	145	155	165	175
6	16	26	36	46	56	66	76	86	96	106	116	126	136	146	156	166	176
7	17	27	37	47	57	67	77	87	97	107	117	127	137	147	157	167	177
8	18	28	38	48	58	68	78	88	98	108	118	128	138	148	158	168	178
9	19	29	39	49	59	69	79	89	99	109	119	129	139	149	159	169	179
10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180

**PLEASE WRITE LEGIBLY FOR NUMBERS ABOVE 180**


- 1 Do you wish to receive/continue to receive BE Radio FREE?**

YES    No

Signature required \_\_\_\_\_

Title \_\_\_\_\_

Date \_\_\_\_\_
- 2 Please check the ONE type of facility operation that best describes your primary business classification:**

A  Radio Stations & Networks

B  Radio/TV Stations & Networks

C  Recording Studio

D  Consultant

E  Contract Engineer

F  Other \_\_\_\_\_ (please specify)
- 3 Which of the following best describes your title?**

(Please check only ONE box.)

**A. Company Management:**

01  Chairman of the Board

02  President

03  Owner

04  Partner

05  Director

06  Vice President

07  General Manager

08  Other Corporate/Financial Officials

**B. Technical Management & Engineering:**

09  Technical Director/Manager

10  Chief Engineer

11  Other Engineering or Technical Title

**C. Operations & Station Management/ Production & Programming:**

12  Vice President Operations

13  Operation Manager/Director

14  Station Manager

15  Production Manager

16  Program Manager

17  News Director

18  Other Operations Title

**D. Other** \_\_\_\_\_ (please specify)
- 4 Which statement best describes your role in the purchase of equipment, components and accessories?**

A  Make final decision to buy specific makes, models, services or programs

B  Specify or make recommendations on makes, models, services or programs

C  Have no part in specifying or buying
- 5 Which of the following types of equipment will you be evaluating for purchase in the next 12 months?**

**1. Audio Products**

A  Audio consoles

B  Audio recorders/players

C  Microphones

D  Digital audio workstations

**2. RF Products**

E  Transmitters/Antenna systems/towers

F  Test & measurement equipment

G  Program transmission systems, STL/fiber

H  Satellite equipment/services

**3. Other Products**

I  Automation equipment

J  Monitors

K  ENG/EFP equipment

L  Tape/optical storage

M  Cases, consoles, cabinets, racks; wire cable

4.  None of the above
- 6 What is the budget for equipment you are evaluating for purchase in the next 12 months?**

1  Less than \$10,000

2  \$10,000 - \$24,999

3  \$25,000 - \$49,999

4  \$50,000 - \$99,999

5  \$100,000 - \$299,999

6  \$300,000 - \$499,999


7  \$500,000 and up
- 7 If you checked A or B on question #2, what is the ADI rank of your market?**

A  Top 20

B  21 to 50

C  51 to 100

D  Over 100



PLACE  
FIRST-CLASS  
POSTAGE  
HERE



CIRCULATION DEPT  
PO BOX 12902  
OVERLAND PARK KS 66282-2902



PLACE  
FIRST-CLASS  
POSTAGE  
HERE



CIRCULATION DEPT  
PO BOX 12902  
OVERLAND PARK KS 66282-2902



**NO ENVELOPE NECESSARY**  
**FOLD-TAPE-MAIL**  
**PLEASE DO NOT STAPLE**



## Meet some high power professionals.

When it comes to AM radio broadcasting technologies, the engineers and technicians at Thomcast are truly high power professionals. With a finely tuned ability to listen to the customer and experience and resources that are second to none, they've helped make Thomcast the first name worldwide in high power AM transmission. The fact is, no other team offers a more complete range of services and technologies to the AM radio broadcaster. And because the high power professionals at Thomcast are also thorough professionals, they can provide the full range of downstream services and support, including technical assistance, operation, training and maintenance. The sooner you talk to one of our high power professionals, the sooner you'll enjoy the high power advantages of the industry leader—Thomcast.

 **THOMCAST**

1, rue de Hautil - BP 150  
78702 Conflans-Ste-Honorine Cedex - France  
Tél : 33 (1) 34 90 31 00 - Fax : 33 (1) 34 90 30 00 - Téléc : 696 833 F

Circle (16) on Reply Card

PROGRAM	LANGUAGE	PLATFORM REQUIRED	DISPLAY SUPPORTED	MAX. # LINES	HANDSHAKE TO PHONES	PRICE	RS #
TalkStar	MS-PDS	XT, 286 <sup>1</sup>	CGA, EGA	8	NO	\$ 795	313
Call Screen Manager	C, C++	XT, 286 <sup>1</sup>	monochrome, composite, CGA, EGA, VGA, SVGA <sup>2</sup>	20	YES <sup>3</sup>	\$ 349	314
Screener III	MS-PDS	XT	monochrome, VGA, SVGA	10	YES <sup>4</sup>	\$ 325	315

**NOTES:**

1. 286 or higher recommended for database searches.
2. Database tools allows custom screen design; multilingual support.
3. Handshakes with Telos interfaces via RS-232A.
4. Handshakes with Telos and Gentner interfaces via RS-232; can be made to handshake with others through Digitronics I/O card.

*Table 1. Talk radio call-management software compared.*

variety, including that modified speakerphone buried under the console.

When communicating with your telephone system, Screener III will show you exactly how long a call has been holding or how long it's been on the air. When a call is put on the air, the box containing that caller's information changes color so the host won't forget which caller he or she is speaking with. When a call is disconnected, that caller's information disappears from the screen automatically, which can be quite handy. Perhaps even handier is the software's ability to *control* your telephone interfaces. At a remote site, for example, a laptop with a modem can connect to the Screener III host, allowing remote talent to not only see the same information displayed in the studio, but also to remotely pick up and hang up lines (using F-keys). When the Clinton administration invited talk show hosts to camp out on the White House lawn for three days last summer, Screener III went along with CBS talker Gil Gross.

The system's handshaking to telephone systems is handled either through a direct serial connection (to those interfaces that include such a control port) or via a custom I/O card that uses opto-isolators for sensing status, and dry contact closures for control. The I/O card also can be set up for machine control, delay dump or anything else you can run with a relay.

Radio engineer Gary Wachter first started work on the program in 1985 at KTSA, San Antonio. Written in compiled basic, it runs on an XT-class

computer, supports monitors from monochrome to SVGA and displays information for up to 10 telephone lines. Caller information can be printed to a running hard copy log and/or stored in an ASCII data file. The stored data can later be accessed with a word processor or database program. Version 3.0.7 is being shipped currently, but a major upgrade should be available in time for NAB '94. The software costs \$325, plus \$295 for the optional I/O card. Support is free, as are upgrades for the first 12 months, after which they cost \$95.

**Call Screen Manager**

Curiously, *Call Screen Manager* was

born from an RF interference complaint. In 1989, mechanical engineer Charlie Case called WHDH, Boston, to complain about RF in his modem connection. The conversations with the station's CE evolved from RF to telephones to computers to, "Hey, maybe you can write something for us..." By mid-1992, *Call Screen Manager* was on the market.

Although the program communicates only with Telos phone interfaces, it may be the most versatile of the three programs. Version 2.1 has become available, which includes a database tools utility affording the user great flexibility in designing screen appearance and database de-

*Continued on page 30*



*Call screening station in control room at KFYZ, Phoenix. Light blue graphics screen (left monitor on lower shelf) shows caller data. This display also appears on host's monitor in studio.*



## THE DIFFERENCE IN SPECTRAL PURITY IS UNCANNY.

*Skip Como, Group Engineer, WRZE, Hyannis, MA*

Both systems  
were a breeze to  
install and they  
work great on  
our paths.

*Craig Bowman,  
Director of Engineering,  
Liggett Broadcasting,  
WLHT, Grand Rapids, MI;  
WLQT, Dayton, OH*

## THE SONIC CLARITY OF THIS DSTL IS UNBELIEVABLE.

*Grady Moates, Consulting Engineer  
WWKX, Providence, RI*

*It's perfection!*

*Lyle Hovens, Director of Engineering,  
KUSC, Los Angeles, CA*

It's the most  
transparent STL  
we've ever used.

*Alan Ford, Director of Engineering,  
KATV, Amarillo, TX*

We were able to do our

46.5 mile link in one hop

with the added bonus of

the best stereo separation

and sound we've ever had.

*Michael Bradford,  
Consulting Engineer, WUPS,  
Mt. Pleasant/Houghton Lake, MI*

The management says they  
can't believe how much  
better it sounds.

*Mario Hieb, Chief Engineer, KXRK, Salt Lake City, UT*

## YOUR BOX IS A BOLT-IN CURE-ALL.

*Ed Trumble, Chief Engineer, WSAE, Spring Arbor, MI*

We'll also be glad to  
quote you on a new STL.

Dolby DSTL users are awed by the difference it has made to their stations. It has not only improved their RF performance, but its punchy, dynamic sound has grabbed the ear of management and programming alike. No wonder the Dolby DSTL Digital Studio-to-Transmitter Link has become the new standard in STL quality.



Dolby Laboratories Inc. • 100 Potrero Avenue, San Francisco, CA 94103-4813 • Telephone 415-558-0200 • Facsimile 415-863-1373 • Telex 34409  
Dolby Laboratories Inc. • Wootton Bassett • Wiltshire SN4 8QJ • England • Telephone 0793 842100 • Facsimile 0793 842101 • Telex 44849  
Dolby, DSTL and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation © 1993Dolby Laboratories Inc. S93/9842/9981

Circle (18) on Reply Card



Courtesy of Northeastern Communications Concepts, Inc.

## Weather services for radio stations

By Sara Croke

**The Bottom Line:** Every station wants to be the first on the air and the most accurate in reporting hazardous weather. Many services are available to radio stations that can help accomplish this goal. They include dial-up services, satellite services and subcontracting services. There also are a few ideas a station can use to improve weather coverage without spending much money. \$

**L**et's start simple and cheap. For example, when was the last time you visited with your friends at the National Weather Service (NWS) or other local emergency management officials, such as civil defense directors, ham radio operators or Civil Air Patrol squadrons? Many of these groups already have a 2-way communication setup and have been properly trained in reporting events during severe weather and other natural disasters. Even if you aren't licensed to talk with them on their frequency, you can still listen to them using an inexpensive scanner.

The local NWS office often uses such a channel to talk to emergency personnel and tell them that a watch or warning is about to be issued, and why. This could allow your meteorologist, reporter or announcer to go on the air with severe weather warnings before other radio or TV stations that rely on automated systems triggered by NWS computer-generated alerts.

The "why" information gathered from the emergency communications channel also can be used to put some substance behind the announcements you read on air. With this additional, specific information, your station can help to prevent needless panic and false alarms, or give life-saving, local-

ized information in a timely manner.

You can get all of this for the price of a scanner and a few hours of visiting time. You might invite representatives from these groups to your station to develop a severe weather policy. Most likely, they'll be flattered you asked and will participate enthusiastically.

### NOAA weather radio

Another inexpensive idea: Dedicate a source on your audio router to the local National Oceanographic and Atmospheric Administration (NOAA) weather radio station. (There are more than 380 NOAA weather radio stations around the country, using seven narrowband FM channels between 162.40MHz and 162.55MHz.)

Better yet, link your weather radio receiver to an alarm beacon that will fire in the on-air studio when the NOAA weather radio sets off its *tone-alert* — a 1,050Hz tone that precedes the announcement of any NWS watch or warning. With such a system, regardless of the time of day, whether you have someone in the newsroom (or if you don't even have a newsroom), your station knows that a weather alert is being issued. In a fully automated facility, this same alert could put a generic interruption message on the air, telling listeners that a weather advisory has been issued, with more (live) information to follow.

Remember, an NWS *watch* indicates the strong possibility of a given type of severe weather. A *warning* means that the weather event is actually happening and heading your way. As a result, watches are generally issued for substantially larger areas than warnings, so warnings are often accompanied by specific geographic locations to which they are limited. To ensure that you know where any of these locations mentioned in alerts are located, get a radar map from the NWS. It has all the geographic points they discuss when referring to storms. Your news wire service may also have an atlas feature that can help.


### Weather over the wire

Speaking of news wires, if your station subscribes to one, it probably includes weather information. Three items can help make this service more useful to you: the ability to choose the areas for which you receive weather data, the capacity to easily change this selection throughout the year (winter weather may come from one direction, summer weather from another), and selectivity in alarming. Regarding the last point, be careful not to alarm too much, lest you fall prey to the "cry wolf syndrome" and thereby ignore a potentially important announcement. Ask your wire service vendor for details.

For specific weather wire service, Contel (through its Government Net-

Croke is chief meteorologist at KMBZ/KLTH, and president of Weather Or Not, a forecasting and consulting service in Kansas City. Respond via BE FAXback at 913-967-1905.

HARRIS PLATINUM SERIES®

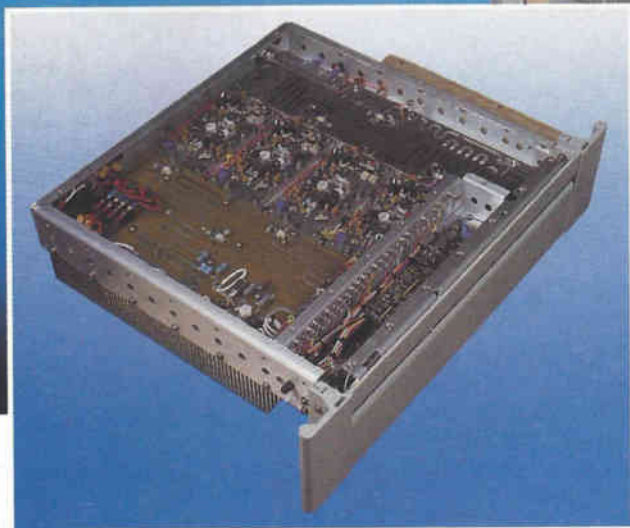

## 200,000 Hours' Fault-Free Performance. And Counting.

That's the level of reliability more than 70 users of Harris Platinum Series® 2-20 kW FM transmitters are experiencing from our FET solid state modules.

Broadcasters from Cyprus to Australia. New York to Madrid. China to Malta. Argentina to Slovenia. Toronto to Taiwan. North Dakota to Arkansas.

Beyond continuous transmitter availability, Platinum users are enjoying such benefits as:

- On-air service capability, up to 90% less routine maintenance and no requirements for tuning or adjustment;
- Superb signal quality under any combination of operating extremes;
- Immense flexibility in system design with such options as the world's first truly digital FM exciter with CD performance, N+1 capability, and switchless combining for high power transmitters.

To learn how a Platinum Series FM transmitter can work for you, please contact us:

**U.S. and Canada:**

Telephone: 217-222-8200

FAX: 217-224-1439

**International:**

Telephone: 217-222-8290

FAX: 217-224-2764

 **HARRIS  
ALLIED**

©1993 Harris Corp.

Circle (17) on Reply Card

works Division based in Chantilly, VA) is the official public wire carrier for the NOAA *Weather Wire*. This service provides all NWS *public products* (those data services designed for understanding by the lay person), and it allows you to change the products you receive. It also can be selectively alarmed. The array of public products available every day from NWS via this service is enormous, and you will probably want only a few at your station. This important filtering of your data feed can be done by the carrier (following a hard-copy list you send them) or by the customer, using a Contel-supplied controller that is added to its standard terminal equipment.

#### Dial-up services

With a desktop computer and a modem, the weather world is your oyster. Numerous dial-up services provide access to all NWS public products, and each provider offers some proprietary products. These offer a higher level of weather information than the wire, much of which is still aimed at the non-meteorologist.

A dial-up service provider will sell

you software (in MS-DOS, Mac or Windows, typically running \$400 to \$600) that you must load on your computer before accessing the service. A top-notch, fast platform is recommended to handle the graphics included in these services, although an older model may do in a pinch. A color monitor also is required. Another critical item is the modem. Besides simply being more efficient with your time, a high-speed modem can save on phone charges if the access call to the service provider's computer is not local to you. Service providers offer dial-up data from 2.4kbit/s to 9.6kbit/s, with a few now offering 14.4kbit/s.

Dial-up services offer alphanumeric statistics and forecasts, regional and national plots of temperatures, dew points, precipitation measurements, wind chills or speeds and the like, plus satellite imagery (both visible and infrared) and a range of graphic display maps with conditions and forecast data as much as 168 hours (seven days) ahead. Regional radar pictures may also be available, but these might not be live and may be enhanced by the provider. Most services do not allow zoom-in on radar (although some new software packages do).



The author prepares her on-air weather reports using satellite-delivered graphics data.

Only *live* radar can be used reliably for severe, up-to-the minute, specific-area weather situations. However, non-real-time radar can give you the larger picture of rain and thunderstorm activity from three or four radar sites in your region.

Service providers' fee schedules typically allow your choice of a flat monthly rate, a per-minute-of-connect-time charge or a charge by the product downloaded. Minimum monthly fees may apply in the latter two cases. Software is usually updated at no charge, either while on-line or by sending back the disk. For a radio station that anticipates regular use of such a service, the flat rate will usually offer the best value. In some cases, this rate may be negotiable (if a vendor is looking to break into your market, for example). Typical service configurations might cost \$200 to \$600 a month.


Regarding phone charges, at least one vendor offers dial-up service to a local phone connection in most cities. Others require a toll call. Still others offer an 800 access line, but then charge back the cost of the calls to the user on its next invoice. Compare these charge-back fees from the service provider with your long-distance carrier's toll charges to the provider's location. Time-of-day also may be a relevant variable in these comparisons.

Regarding phone charges, at least one vendor offers dial-up service to a local phone connection in most cities. Others require a toll call. Still others offer an 800 access line, but then charge back the cost of the calls to the user on its next invoice. Compare these charge-back fees from the service provider with your long-distance carrier's toll charges to the provider's location. Time-of-day also may be a relevant variable in these comparisons.

#### Satellite services

A desktop computer and a satellite

## Shopping for RDS?

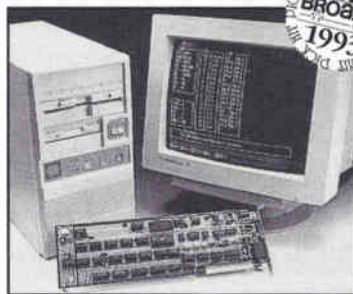

### Here's why *Broadcast Engineering* picked Modulation Sciences

The Modulation Sciences Model RDS-1 RDS/RBDS Coder starts where others leave off. It gives you complete, on-screen access to every feature in the RDS/RBDS Standard. Storage for 255 Radiotext messages of *unlimited* length. Random access to an unlimited combination of programming functions. Walkaway Dynamics™ for automatic operation while unattended. Long PS™ to animate any RDS receiver display. Format HotClock™ for dayparted programming. And a host of additional features to make your station sizzle with information.

When you add RDS, there's only one choice. Get all the details on the *interactive* RDS-1. From the RDS Authority . . .

#### modulation sciences, inc.

12A World's Fair Drive • Somerset, NJ 08873 USA  
Voice (908) 302-3090 • Fax (908) 302-0206 • Toll-free in USA (800) 826-2603

Circle (19) on Reply Card

# DigiCenter™



## The Best Digital Audio Management System Is Produced by the Company You Trust...ITC

- Performance Capable
- Broadcaster Friendly
- Benchmark Reliability
- Flexible, Expandable
- Protected Investment

**E**njoy the many benefits of Digital Audio management designed specifically for the broadcast industry that only DigiCenter can offer. DigiCenter accomplishes all audio operations with an ease and efficiency that makes stations more *profitable* and their staffs happy.

DigiCenter is proven as a powerful and reliable tool, providing simultaneous on-air and production capabilities unsurpassed in radio. Capability that increases the *productivity* of all station operations. DigiCenter's flexible design allows customization to individual station needs making each application **unique** to your requirements today and adaptable to your plans for the future.

As another quality ITC product, DigiCenter is *guaranteed*—not only in operation but also in your satisfaction as an ITC customer. We stand behind our products 100%. That's how we've gained our reputation for producing equipment so reliable we've set broadcast industry standards for over 20 years.

### Owners praise DigiCenter's Performance

- **Andy Eubank, General Mgr. station WLHM:**  
"DigiCenter performs better than advertised. We are delivering higher audio quality more efficiently and our air and production staff love it."
- **John Sullivan, Owner, station WKJR:**  
"Profitability has increased dramatically since we've been in operation with DigiCenter. We couldn't be more pleased with the system's performance and ITC's support."
- **Jon Jenkins, Owner, station KWMT:**  
"DigiCenter has been paying big dividends since the day we installed it. Our talent has been using it right from the start with little training needed."

DigiCenter is easy to purchase and install. Through ITC's exclusive trade-in plan you can return your old technology equipment to ITC for a generous allowance on the DigiCenter, making your transition from analog to digital a natural progression of technology exchange.

Call direct to our plant in Bloomington for more information or to set up a hands-on demonstration.

*DigiCenter* ... The New Benchmark in Digital Audio



I.T.C. Corporation • 2425 South Main Street • Bloomington, IL 61702-0241 U.S.A.  
Phone: 1-800-447-0414, (309) 828-1381 • FAX: (309) 828-1386

receive terminal also can take you a long way in the weather information business. To access these higher data-rate services (e.g., 280kbit/s), some vendors allow you to use your own computer. Others require a hardware package that they supply. Because access is full-time rather than dial-up, downloading can be automatically initiated by the provider at frequent intervals, or data downloading can be

called for by the customer. All of the weather products mentioned earlier are included in satellite services. Additionally, color radar — either live, time-elapsd or images stored every 15 minutes — may be added to your weather package.

If you're wondering what purpose color radar serves for radio weather-casting, ask personnel at stations that use it how they feel. You'll probably

hear that it is an invaluable tool for forecasting and, more important, that it helps newscasters and announcers put a picture of the weather pattern into the listener's mind — a traditional strength of radio. For this reason, color monitors displaying radar should be installed in the newsroom and in the air studio or control room.

Configuration options for satellite

# 10

## If you look at this and see "ten," not "two," we've got the digital audio system for you.

The DAD 486x Digital Audio Delivery System lets you reap all the benefits of a powerful, CD quality digital audio system without having to hire computer wizards to operate it. With your DAD on the job, you can throw away your cart and floppy disk machines, the carts, the disks and all the problems and expenses they've caused you. But since DAD's basic operation *emulates* standard cart machines, you won't have to waste time learning unusual operating methods or incur brain damage trying to figure out complex computer screens. DAD's easy, intuitive touchscreen operation lets you put it right to work boosting your audio quality,

improving your audio operations and paying dividends on your investment quickly and efficiently.

But, underneath DAD's easy to operate touchscreen is a powerful, hard disk-based production and playback system. DAD can even be configured as a networked system with multiple users and locations for even greater versatility and economy. With virtually unlimited stereo audio storage capacity, *graphic* waveform editing capability and versatile automation, interface and operating features, your DAD system is far more than just a replacement for cart machines. It really is a *complete* Digital Audio Delivery System!


### The DAD 486x



To receive more information or to find out how to put our DAD to work for you, call us at 1-800-ENCO SYS.



1866 Craigshire Drive, St. Louis, Missouri 63146 USA  
Tel: 800-362-6797 or 314-453-0060 Fax: 314-453-0061

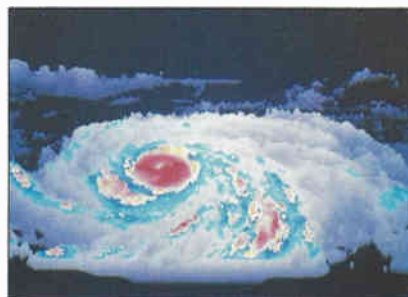

A hurricane displayed in color-enhanced 3-D satellite imagery, a proprietary product of weather data service provider Kavouras.

systems offering radar include local overlays, zoom capability and access to WSR-88D, the latest generation of NWS Doppler radar now being deployed into general service. (During its recently concluded development stage, WSR-88D was called NEXRAD, for NEXt-generation RADar. Some people in the weather data industry still refer to it under that earlier name.)

WSR-88D improves upon "conventional" radar in several significant areas, including accuracy, range and sensitivity. Its Doppler feature refers to its ability to sense the frequency shift of a radar echo received from a moving target. The system interprets this motion in its display, thereby showing air current flow and pointing out when wind signatures indicate severe *vorticity* (localized rotational movement) and possible tornadic activity.

The 88D system also allows analysis of a storm in vertical segments — a kind of "atmospheric CAT scan" — providing great insight for meteorologists into thunderstorm development. For the non-scientific community, the greatest advantage of 88D is its ability to "see through" strong thunderstorms. Previous radar generations could not detect a thunderstorm if it was behind another thunderstorm from the radar antenna's point-of-view. This required the use of several different radars in a variety of locations, in order to see "behind" the first thunderstorm — a process no longer needed with 88D.

The 88D products may be bundled

Circle (21) on Reply Card

# If It Works, Don't Fix It



## The Shure M267

How many times have you seen a good product go bad when someone tries to "fix" it? Isn't it nice to know that there are products like the Shure M267 that you can count on to work well, year after year, because of their solid design. For over 10 years the M267 has been one of the most asked for broadcast mic mixers on the market. It offers useful features such as four switchable mic/line inputs, transformer balanced outputs, headphone amplifier, peak limiter, battery/AC operation and tone oscillator.

It makes sense to go with a product that keeps working for you, like the Shure M267. It also makes sense to buy it from a proven supplier like BSW. For over 20 years BSW has been offering personal, professional service to thousands of repeat customers. Why not stick with a great combination; BSW and the Shure M267.

**BSW Price Only \$399.00**

Call Toll Free 800-426-8434 or Fax 800-231-7055

**BSW**  
BROADCAST SUPPLY WORLDWIDE

7012 27th Street West • Tacoma, WA 98466 USA

Circle (22) on Reply Card

**Satellite hardware packages vary widely.**

with other services, such as public weather wire, alphanumeric weather data, weather graphics, satellite imagery and proprietary products available from most providers. Pricing,

flexibility of service and proprietary products are the primary distinguishing features between providers, so explore these well. A typical satellite service package might run \$800 to \$2,000 a month.

Satellite hardware packages vary widely. Ku-band and C-band services are available, with VSAT systems starting at approximately \$3,500 (excluding the computer). More fully fledged

systems range from \$12,000 to \$30,000. Significant pricing variation comes from whether dedicated or off-the-shelf computer hardware can be used.

**Subbing it out**

Why bother with all of this equipment and staff when you can hire a weather service to provide live weather reports, recorded feeds or both? This is a selling point of some weather companies across the United States, whose services can typically be purchased by daypart or as 24-hour severe weather coverage.

Most of these services are quite reliable and provide a reasonable amount of customization. Ideally, their reports should not sound "canned" but rather as if they are provided exclusively for your listeners. See how many stations a provider currently serves and how many stations each meteorologist at the company handles. Talk with a few of the stations that already use their service. Also check the provider's track record for reaction time to watches or warnings.

Locally known meteorologists and weather personalities (typically TV weathercasters) can also serve a radio station well. The chief caveat involves accuracy when prerecording a forecast. Some weathercasters will record a morning drive forecast for radio after the late-night TV newscast, but if last night's "cloudy and 30°" forecast turns into "sunny and 60°" by morning, you're stuck. Why pay for popularity when you're jeopardizing your credibility? Avoid this by using the TV meteorologist for afternoon drive only, or hire a 24-hour weather service to monitor for overnight changes.

As you can see, there is an abundance of weather information available to radio stations, spanning a wide range of weather data needs and budgets. Certainly, there is no shortage of appropriate solutions.

Acknowledgments: The author wishes to thank the following for their assistance in preparing this article: Bill Bunting and Randy McKee at the National Weather Service, Mike Edwards at Kavouras, and Todd Glickman and Gene Doyle at WSI.

# AN EXCLUSIVE EVENT



CLUBVA KAPPA Ph. Paolo Venturini

*T*here are moments in the course of a manufacturing Company's life that become historical milestones, not only for the Company itself, but for the whole industry.

**EXCLUSIVE FM, AEV's newest FM broadcasting processor, represents one of such milestones. It's an event.**

**A truly extraordinary event, setting a faster pace in the evolution of FM broadcasting.**

**To emphasize only some of EXCLUSIVE FM's features would be like diminishing it.**

**AEV is pleased to invite Radio and TV Broadcasters the world over to contact its Dealers for detailed information, as well as to verify, in the course of a hands-on demonstration, the meaning of the word "extraordinary".**



**ELECTRONIC BROADCAST EQUIPMENT**

➔ *For more information on weather services, circle (200) on Reply Card. Also see "Weather Data Services," p. 80 of the 1994 BE Buyers Guide.*

AEV • ITALY • Phone 39 + 51 + 950249 / 950350 Fax 950201

Circle (23) on Reply Card





# MAKE A CLEAN SWEEP WITH PORTABLE ONE



Replace the clutter on your audio test bench with the Portable One *Plus* from Audio Precision. With one instrument you can make 12 different audio measurements. All in a test set designed from the start with 2 channel level, crosstalk and phase measurement capability.

Use the unique AC Mains check function for monitoring power line problems and the built-in wow & flutter meter for measuring analog tape & disc.

The Portable One *Plus* is built to Audio Precision performance and durability standards... so you know you'll get the same superior performance in the field as on the bench.



Clean sweeps are a breeze with the graphic sweeping capabilities of the Portable One *Plus*. Plot amplitude or level (stereo), phase or distortion versus frequency.

The graph may be rescaled after a sweep, and the graphic cursor with numeric readout gives you data readings for each measured point.



Connect a dot matrix printer for hard copy printouts of both graphs and tabular data, as well as instrument panels and bargraphs.



The Portable One *Plus*... the single instrument solution for both your bench and portable audio testing.



**Audio  
precision**

P.O. Box 2209, Beaverton, OR 97075-3070  
(503) 627-0832 FAX: (503) 641-8906  
US Toll Free: 1-800-231-7350

Circle (24) on Reply Card

INTERNATIONAL DISTRIBUTORS: **Australia:** IRT Electronics Pty. Ltd., Tel: (61) 2 439 3744 **Austria:** ELSINCO GmbH, Tel: (43) 222 311 1751  
**Belgium:** Trans European Music NV, Tel: (32) 2 466 5010 **Bulgaria:** ELSINCO, h.e. Strelbishte, Tel: (359) 92 581 698 **Canada:** GERRAUDIO Distribution, Tel: (416) 696-2779 **China, Hong Kong:** A C E (Int'l) Co. Ltd., Tel: (852) 424-0387 **Czechoslovakia:** ELSINCO GmbH, Tel: (43) 222 812 1751 **Denmark:** npr Elektronik a/s, Tel: (45) 99 57 15 11 **Finland:** Genelec Oy, Tel: (358) 77 13311 **France:** ETS Mesureur, Tel: (33) (1) 45 83 66 41 **Germany:** RTW GmbH, Tel: (49) 221 70 81 30 **Hungary:** ELSINCO KFT, Tel: (36) 112 4854 **Israel:** Dan-El Technologies, Ltd., Tel: (972) 3-544-1466 **Italy:** Medea S.r.l., Tel: (39) 2/4840 1780 **Japan:** TOYO Corporation, Tel: (81) 3 (5688) 6800 **Korea:** Myoung Corporation, Tel: (82) 2 784-9942 **Malaysia:** Test Measurement & Engineering Sdn. Bhd., Tel: (60) 3 734 1017 **Netherlands:** TM Audio B.V., Tel: (31) 034 087 0717 **New Zealand:** Audio & Video Wholesalers, Tel: (64) 7 847-3414 **Norway:** Lydconsult, Tel: (47) 9 19 03 81 **Portugal:** Acutron Electroacustica LDA, Tel: (351) 1 9414087 9450862 **Poland:** P.H.U INTERLAB, Tel: (48) 22 335 454 **Singapore:** TME Systems Pte Ltd., Tel: (65) 298-2608 **South Africa:** SOUNDFUSION, Tel: (27) 11 477-1315 **Spain:** Telco Electronics, S.A., Tel: (34) 1 531-7101 **Sweden:** Tal & Ton Elektronik AB, Tel: (46) 31 80 36 20 **Switzerland:** Dr. W.A. Gunther AG, Tel: (41) 1 910 41 41 **Taiwan:** ACESONIC Intl Co., Ltd., Tel: (886) 2 716-8896 **United Kingdom:** SSE Marketing Ltd., Tel: (44) 71 387-1262



Courtesy of Wheatstone

## Triple-synchronous broadcasting

By John Collinson

*An old idea gets a new wrinkle.*

**T**he plains of eastern Kansas and extreme western Missouri recently became the home of a new synchronous transmitter arrangement. There is nothing new about synchronous transmitters, but this particular test has some unique features.

KNHN, Kansas City, KS, is the flagship. The news/talk station operates on 1,340kHz at 1kW day and night. Approximately 125 miles south is Pittsburg, KS, where KPHN is also on 1,340kHz at 1kW full-time. Both stations are non-directional. A new synchronous transmitter has been located approximately halfway between the two, near Amoret, MO, just over the state line. (See Figure 1.)

Several stations use a main site and one or more synchronous sites at lower power. What's different about this application is its use of two existing, independently licensed co-channel stations with a single synchronous site linking them. Authorized by the FCC as experimental, the Amoret transmitter operates at a maximum of 200W.

Most synchronous sites are fed by STLs or phone lines, requiring adjustable audio delays to fine-tune the audio timing in the interference zones where the signals overlap. KNHN's program audio is fed from Kansas City by a dedicated 56kbit/s DDS telco line to Topeka, KS, where it is uplinked on an analog SCPC satellite channel

on Satcom C5. All three stations then broadcast the received satellite signal. (Obviously, this transmission path precludes live announcers at KNHN from monitoring the off-air signal because of satellite and other delays.) Audio delay lines are installed ahead of each transmitter, but any adjustment from nominal has proved a hindrance rather than a help.

### Dealing with overlap zones

Because AM detectors don't exhibit capture effect like FM, any synchronous AM arrangement creates an interference or "mush" zone where the signals overlap. The area where the 0.5mV/m contours overlap is considered to be the interference zone. In this case, those contours overlap by several miles. Ideally, the individual transmitter powers are adjusted so that these interference zones fall in areas where little or no substantive coverage is desired. As previously established and licensed stations, KNHN and KPHN must keep their powers unchanged, leaving the new Amoret site as the only adjustable element.

Preliminary observations indicate that power reduction at the synchronous site to move the mush zone can result in distinct subjective effects on the received audio, at least in some receivers. In one test, listeners in one of the mush zones monitored the off-air signal on a car radio while the synchronous transmitter was turned on and off. When the Amoret transmitter was switched on, the received

signal's volume dropped, but so did the background noise, rather like normal receiver quieting when approaching the transmitter.

When the synchronous site was shut off, the volume from the main site came up, but the signal-to-noise ratio deteriorated. In terms of subjective audio quality, the synchronous transmitter was considered a definite improvement by the listeners.

---

***Any synchronous AM arrangement creates an interference or "mush" zone where the signals overlap.***

---

It quickly became evident that adjusting the carrier frequencies of the two main sites while leaving the synchronous site as the reference was the most effective method of synchronization. Experiments from previous synchronous AM experiments showed that actual phase-locking of the sites is undesirable because of creation of fixed nulls.

FCC authorization requires the transmitters to be within 0.1Hz of each other, which translates to six drift cycles per minute. In practice, this drift rate actually produces a nearly unlistenable signal in the mush zones, however. Tests have shown that frequency stability is vastly more critical to listenability in those zones than the relative powers of the main and synchronous sites. The sites in this

Collinson is owner of Modulation Limited, a contract engineering firm in the Kansas City, MO, area.

**OTARI'S NEW R-DAT:  
PROFESSIONAL QUALITY WITHIN YOUR REACH.**



When you've had enough of unreliable "warmed-over" consumer decks, we've got a *professional* R-DAT for you at an affordable price.

Our new DTR-90 delivers the rock-solid reliability and superb sound that have made Otari audio machines the choice of professionals everywhere, and at the same time delivers all the performance and features you'll ever need.

For example, so you can make changes fast and easily the DTR-90 is the only R-DAT available with individual record insert on Ch. 1, Ch. 2, and time-code channel. And its user-friendly front panel features an LCD screen that gives you powerful functions often relegated to DIP switches in other R-DATs—you can even detach the control section of the front panel and use it as a remote unit!

You'll also appreciate the optional Time-code Card with its chase synchronizer for tight lock with VTRs and ATRs, as well as features like read-after-write and punch-in, punch-out.

And if you need a complete electronic editing system, you can't do better than couple the DTR-90 with Otari's CB-149 editor for flawless digital editing.

For the complete story on this quality-built and affordable R-DAT, call Otari at (415) 341-5900.



**Otari Corporation**  
378 Vintage Park Drive  
Foster City, CA 94404  
U.S.A.  
(415) 341-5900  
Fax: (415) 341-7200

**Otari Corporation**  
U.S.A.  
(415) 341-5900  
Fax: (415) 341-7200

**Otari Inc.**  
Japan  
(0424) 81-8626  
Fax: (0424) 81-8633

**Otari**  
(UK) Ltd.  
United Kingdom  
(0753) 580777  
Fax: (0753) 542600

**Otari**  
Deutschland GmbH  
Germany  
02159/50861-3  
Fax: 02159/1778

**Otari Singapore**  
Pte., Ltd.  
Singapore  
(65) 743-7711  
Fax: (65) 743-6430

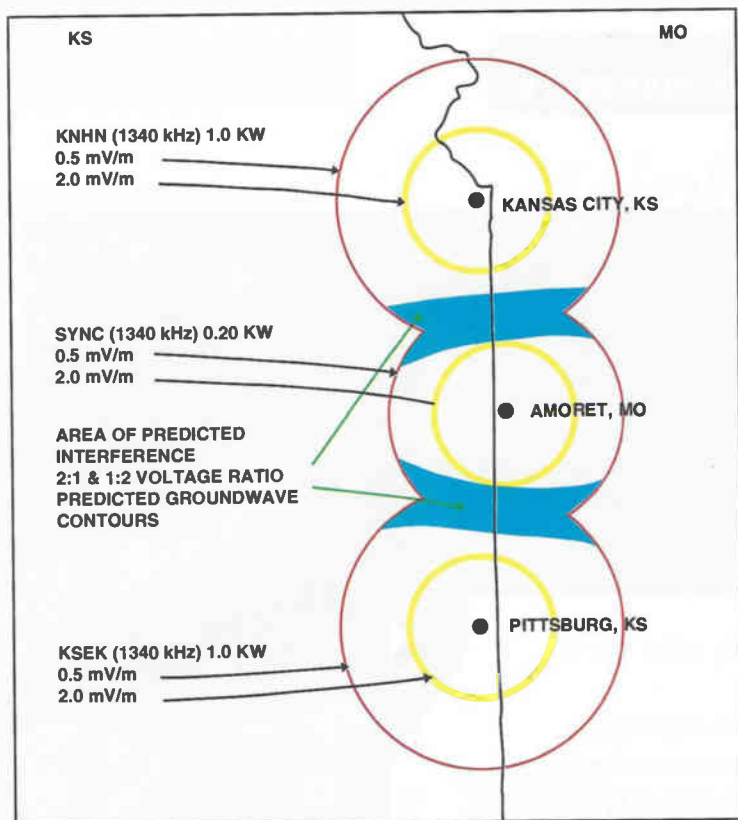


Figure 1. Coverage area of KNHN's triple-synchronous transmissions. Shaded areas indicate interference zones.

test have achieved one drift cycle every 90 to 120 seconds.

The transmitters use outboard, precision (oven-style) oscillators specified to be within  $10^{-9}$  per day (1 part per billion error in 24 hours). Rubidium standard oscillators would have been even more stable, but the limiting factor with the current oscillators is ultimately not a function of their stability but the difficulty in their adjustment. The Pittsburg and Amoret transmitters are vintage tube models, which also required some creative modifications to interface the precision oscillators into their RF driver stages.

*The FCC has shown interest in the experiment, indicating that it hasn't written off the AM band yet.*

Every six months the FCC requires a report on frequency stability of the sites. Documentation of the frequency stability is provided by a field-strength meter located in the interference zones, which shows peaks and nulls in signal strength as the carriers add and cancel. A chart recorder fed by the field-strength meter documents the beat frequency rate. For routine checks, the field-strength meter fluctuation gives a good indication of the beat rate.

#### Market impact

The original impetus for the project was a quest to improve KNHN's coverage in the southern parts of the Kansas City area, especially at night. Because KPHN, Pittsburg (then KSEK) was the nearest co-channel station, it was the primary obstacle to any coverage improvements to the south. The FCC agreed to the triple-sync arrangement (including the new Amoret site) if KNHN's owners purchased KSEK.

KPHN has a separate sales staff and could break away from the satellite feed for local breaks with Pittsburg area advertisers, if desired, although this is not anticipated. The synchronous site in Amoret is treated like an FM translator — it is permitted only to follow the programming of KNHN and is not authorized to originate any separate local programming. Although the FCC authorization for the Amoret site is classified as experimental, no termination date was placed on its operation.

Whether the desired coverage improvement in the Kansas City metro area was accomplished has yet to be proved — tests and measurements are still under way. Meanwhile, KNHN has increased its coverage into areas previously unable to support a regional news/talk format. The FCC has shown considerable interest in the results of the experiment, indicating that it hasn't written off the AM band just yet. It may give the commission one more tool to use in its determination of future improvements for radio broadcasting.

## A CREATIVE SOLUTION TO YOUR STL PUZZLE



If you've been puzzling over your STL options, consider how digital T1 fits.

A digital STL over T1 lines is a reliable, cost effective alternative to radio STL. T1 STLs handle CD quality uplinks and backhaul, as well as transmitter alarm

monitoring and conventional voice with ease. And, plenty of room to expand without FCC type approval concerns.

Intraplex offers the broadest range of digital T1 solutions for your STL, TSL, and LMAs. Talk to us about a creative digital T1 solution to your STL puzzle. Today.

Intraplex, Inc. (508) 692-9000.  
In Europe, (44) 296-66-1748.



Circle (26) on Reply Card

# There's a Right Way



**"I did it right from the start with Computer Concepts' DCS."**

*I don't sweat* when it comes to our spot-heavy morning drive or complicated LMA formats. The reason is simple: First I did my homework. And then I bought a DCS hard disk system from Computer Concepts. In fact, I bought several.

I smile at the thought of multiple program formats and satellite automation, live and live assist. I laugh at complex spot rotations, two-channel crossfades with simultaneous recording and networking to traffic—they're no problem for the DCS.

And Computer Concepts customer support is terrific. Their software experts can even troubleshoot my DCS and upgrade the software remotely, via modem.

No wonder Computer Concepts DCS has turned hundreds of stations into happy customers. I'm glad I'm one of them. Oh, I almost forgot. The price was right, too.



**"I should have bought a DCS in the first place."**

*I thought* I'd impress HQ by buying the cheapest hard disk system I could find. After all, they all look the same! Their promises sounded good and I wanted to believe.

I found out promises come cheap. But their system wasn't really cheap—not once you added up the little "extras" it took to do the bare minimum. And it still couldn't do all the things our station really needed.

I found out the hard way, at 3 AM when the system we bought crashed. And in morning drive, when missing spots meant dollars down the drain. When I finally reached customer support, they said they were working on software they thought would fix my problem, but they weren't sure when it would be done. Guess what I told them?

Now I know better. We're getting a Computer Concepts DCS. I learned a costly lesson: Get it right the first time. Call Computer Concepts first.

# and a Wrong Way

**DCS by Computer Concepts CORPORATION**

Computer Concepts Corporation  
8375 Melrose Drive, Lenexa, KS 66214  
Phone: (913) 541-0900 Fax: (913) 541-0169

Circle (28) on Reply Card

## Extortion or Insurance?

Regarding the article, "Maintaining Satellite Systems" (November 1993), I have two comments:

1. In reference to the recommendation that downlinks should be registered with a frequency coordination company: Once you receive the registration for the downlink (from the FCC) or the license for an uplink, you are protected. Any new microwave (terrestrial) installation is required to protect your installation. Charging a frequency protection fee is basically an extortion. When licensees coordinate new systems, they tell the FCC that they will not cause interference to any existing system.
2. Regarding the statement that "the Ku-band is not shared by terrestrial microwave users, so frequency coordination is rarely a problem:" Under FCC Part 21, subpart J, the Ku-band (11.7-12.2GHz) is shared with the Local Television Transmission Service (LTTS) on a secondary basis.

Howard Fine  
Satellite and Transmission Consultant  
Reseda, CA

## The author responds:

Anyone's perception of the value of frequency-protection payments would be determined by the value to them of the services provided. For example, the frequency coordination and protection company *Comsearch* charges \$220.80 a year (\$18.40 a month) for protecting a single, receive-only earth station.

FCC registration alone does not protect you against interference. It just requires other users to send you prior coordination letters. If the letter is lost, or you do nothing before the coordination period expires, the new terrestrial

user is assumed to be acceptable to you. If any interference is caused to you by the new terrestrial user, you must spend money or time to prove the source and to prove you were there first. Under a protection scheme, however, both you and the coordinator receive letters. It is unlikely both copies will be lost or ignored simultaneously.

As a backup check, *Comsearch* actively checks FCC applications and Public Notices to make sure that all license filings are covered by prior coordination letters (thus preventing uncoordinated filings), and that all letters are covered by Notices. The coordination specs in both documents also are compared. You could do this yourself, but you'd need to pay to subscribe to Public Notices and devote time to calculate any effects on your downlink(s) plus prepare objection letters.

*Comsearch* also analyzes the coordination letter data and informs clients in monthly reports whether each prospective case passed or failed the client's protection. To do this yourself, you'd need to buy or write a computer program (or calculate manually) to determine whether each coordination letter violates your coordination. If something were to slip by you, the first notice of a problem would be the interference itself. Your downlink could be unusable while you investigate.

Finally, *Comsearch* goes to bat immediately for protection clients, especially in investigation of uncoordinated interference. To conduct your own investigation, you'd need to buy or research a database of potential

### Sensational Sound Over Switched 56/ISDN



The CDQ1000, Crystal Clear Digital Audio™ at an affordable price.

**Transmit 10 kHz Over a Single Digital Circuit!**  
**CCS**, the pioneer of digital audio codecs, proudly presents the **CDQ1000**, the only codec that lets you transmit up to 10 kHz of audio over a single switched 56 or ISDN line.

**Preserve Your Past Investments in Codecs!**  
 The versatile CDQ1000 is fully compatible with G.722, 7.5 kHz codecs such as the CCS Micro56 and Micro66i. It also interoperates with the CCS CDQ2000 ISO MUSICAM® codec. You can now achieve universal compatibility with a single codec!

- Three modes of operation: 7.5, 8.2, or 10 kHz
- CCITT G.722 or enhanced MUSICAM compression
- Two-way mono transmission
- 56 kbps or 64 kbps data rate
- Both V.35 and X.21 digital interfaces



CCS Audio Products  
33 West Main Street  
Holmdel, NJ 07733, USA  
(908)946-3800 FAX: (908)946-7167




CCS Europe GmbH  
Obere Hauptstraße 52  
D-8050 Freising  
49 8161 12222 FAX: 49 8161 12280

Circle (27) on Reply Card

I would like to see more coverage in BE Radio about: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



## ACTION • CARD

New Subscription  
  Renewal  
  Address Change  
  Information Request

Name \_\_\_\_\_  
 Title \_\_\_\_\_  
 Company \_\_\_\_\_  
 Address \_\_\_\_\_  
 City \_\_\_\_\_  
 State \_\_\_\_\_ Zip \_\_\_\_\_

Phone \_\_\_\_\_  
 FAX \_\_\_\_\_

### FASTER ACTION!

If you have immediate interest in any products in this issue, write in the number(s) below and check all the appropriate boxes.

I am interested in these items	Immediate Need	Have Salesperson Call	Name Nearest Dealer	Send Literature	For Future Reference
#					
#					
#					
#					

#### Circle reader service numbers below for more information

1	11	21	31	41	51	61	71	81	91	101	111	121	131	141	151	161	171
2	12	22	32	42	52	62	72	82	92	102	112	122	132	142	152	162	172
3	13	23	33	43	53	63	73	83	93	103	113	123	133	143	153	163	173
4	14	24	34	44	54	64	74	84	94	104	114	124	134	144	154	164	174
5	15	25	35	45	55	65	75	85	95	105	115	125	135	145	155	165	175
6	16	26	36	46	56	66	76	86	96	106	116	126	136	146	156	166	176
7	17	27	37	47	57	67	77	87	97	107	117	127	137	147	157	167	177
8	18	28	38	48	58	68	78	88	98	108	118	128	138	148	158	168	178
9	19	29	39	49	59	69	79	89	99	109	119	129	139	149	159	169	179
10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180

#### PLEASE WRITE LEGIBLY FOR NUMBERS ABOVE 180


### 1 Do you wish to receive/continue to receive BE Radio FREE?

YES    No

Signature required \_\_\_\_\_

Title \_\_\_\_\_

Date \_\_\_\_\_

### 2 Please check the ONE type of facility operation that best describes your primary business classification:

- A Radio Stations & Networks  
 B Radio/TV Stations & Networks  
 C Recording Studio  
 D Consultant  
 E Contract Engineer  
 F Other \_\_\_\_\_  
(please specify)

### 3 Which of the following best describes your title?

(Please check only ONE box.)

#### A. Company Management:

- 01 Chairman of the Board  
 02 President  
 03 Owner  
 04 Partner  
 05 Director  
 06 Vice President  
 07 General Manager  
 08 Other Corporate/Financial Officials

#### C. Operations & Station Management/

- 12 Vice President Operations  
 13 Operation Manager/Director  
 14 Station Manager  
 15 Production Manager  
 16 Program Manager  
 17 News Director  
 18 Other Operations Title

#### B. Technical Management & Engineering:

- 09 Technical Director/Manager  
 10 Chief Engineer  
 11 Other Engineering or Technical Title

#### D. Other \_\_\_\_\_

(please specify)

### 4 Which statement best describes your role in the purchase of equipment, components and accessories?

- A Make final decision to buy specific makes, models, services or programs  
 B Specify or make recommendations on makes, models, services or programs  
 C Have no part in specifying or buying

### 5 Which of the following types of equipment will you be evaluating for purchase in the next 12 months?

#### 1. Audio Products

- A Audio consoles  
 B Audio recorders/players  
 C Microphones  
 D Digital audio workstations

#### 3. Other Products

- H Automation equipment  
 I Monitors  
 J ENG/EFP equipment  
 K Tape/optical storage  
 L Cases, consoles, cabinets, racks; wire cable

#### 2. RF Products

- E Transmitters/Antenna systems/towers  
 F Test & measurement equipment  
 G Program transmission systems, STL/fiber  
 H Satellite equipment/services

#### 4. None of the above

### 6 What is the budget for equipment you are evaluating for purchase in the next 12 months?

- 1 Less than \$10,000  
 2 \$10,000 - \$24,999  
 3 \$25,000 - \$49,999  
 4 \$50,000 - \$99,999  
 5 \$100,000 - \$299,999  
 6 \$300,000 - \$499,999  
 7 \$500,000 and up

### 7 If you checked A or B on question #2, what is the ADI rank of your market?

- A Top 20  
 B 21 to 50  
 C 51 to 100  
 D Over 100



PLACE  
FIRST-CLASS  
POSTAGE  
HERE



CIRCULATION DEPT  
PO BOX 12902  
OVERLAND PARK KS 66282-2902



PLACE  
FIRST-CLASS  
POSTAGE  
HERE



CIRCULATION DEPT  
PO BOX 12902  
OVERLAND PARK KS 66282-2902



**NO ENVELOPE NECESSARY  
FOLD-TAPE-MAIL  
PLEASE DO NOT STAPLE**



# YOU DON'T KNOW WHAT YOU'RE MISSING



**If** you don't have an Eventide® VR240 Digital Broadcast Logger, you're missing the easiest, most efficient way to keep track of everything that goes out on your air, and more. There's no bulky, high maintenance, hard-to-use hardware, because Eventide has compressed a complete 8-to-24 channel digital broadcast logging system into one easy-to-use three-rack-space device. There's no need for a tape warehouse, either—the VR240 records up to ten days worth of audio on a single ultra-compact DAT cassette. With the dual-drive option, total unattended logging time stretches up to three weeks. And yes, you can search and play a tape on one deck while simultaneously recording audio on the other.

Without an easy, practical, multi-channel logging system, you're missing what's going on with your crosstown competitors, what your talent (and call-ins) *really* said on the air, when that commercial *actually* ran, who called your contest lines, what the police and fire

dispatchers said. The VR240 even records modem, fax, and transmitter remote control telemetry transmissions. The advantages of logging have always been clear. Now the Eventide Digital Broadcast Logger gets rid of the disadvantages.

There's no broadcast logging system as advanced as the VR240. And with hundreds of Eventide-built digital loggers already in service worldwide, there's no other digital logger with our track record of reliable service. So don't miss out—call Eventide or your broadcast distributor for full information on the logger that makes full-time logging practical: The Eventide VR240 Digital Broadcast Logger.

## Eventide

One Alsan Way • Little Ferry, New Jersey 07643 USA  
Tel: 201-641-1200 • Fax: 201-641-1640

Circle (10) on Reply Card



## DAW

By Arrakis

- **DIGILINK II:** new features include cross fade and overlap of hard disk audio files, autofill and smart squeeze, auto music scheduling, file search by title, international languages and user-definable screen support, cart rotation, one-touch hot rotation, remote control one-touch rotation, and Pioneer 18-CD player support; Trak\*Star multitrack and Trak\*Star 2 digital editors released; free software update.

Circle (254) on Reply Card



## Broadcast handbook

By Wind River Broadcast Center

- **Broadcaster's Encyclopedia:** large educational volume tailored to help licensees avoid FCC fines; fourth volume in the Broadcaster's BIGBOOK Project; similar in appearance, structure and price to other three volumes.

Circle (251) on Reply Card

## Digital cartridge machine

By AirCorp



- **AirCart:** features ASPECT compatibility standard; 48kHz professional sampling rate; 11 minutes of non-compressed stereo audio on 3.5-inch magneto-optical discs; 1/3-rack width design.

Circle (255) on Reply Card

## Digital sound editor upgrade

By Orban/AKG

- **DSE 7000:** digital sound editor specifically engineered for radio production; new digital input/output module provides universal sample rate conversion for AES/EBU and SPDIF digital formats and digital effects sends, as well as synchronization to video and word clock signals; the new digital I/O is a hardware upgrade over the standard analog I/O module and is designed to be compatible with any DSE 7000.

Circle (261) on Reply Card

## Broadcast processor

By AEV

- **Exclusive FM:** first device of its kind to adopt a 10-band split processing approach; user can personally access every parameter or have the unit perform part of the job by automatically setting some non-critical processing parameters; features several variable gain stages working with different timing characteristics; includes 10 preset settings; more than 250 equalization characteristics can be permanently stored in memory for recall; a preset can be recalled according to a time table, allowing the on-air sound to be modified according to programming moods.

Circle (250) on Reply Card

## Radio station journal/directory

By M Street Corporation

- **M Street Radio Directory:** 700-page, 6" x 9" soft cover book lists addresses, phone numbers, formats, facilities, owners, markets and ratings for more than 13,000 stations in the United States and Canada; divided into four sections: the first lists stations by state and city of license; the second section lists all stations alphabetically by call letters; the third lists them in frequency order; and the fourth section is a unique listing of stations in more than 500 radio markets.

- **M Street Journal:** weekly publication that catalogs all format changes, call letter changes, ownership changes, new station applications and grants, station facility changes, translators, and new frequency allocations; it also summarizes the week's news in a newsletter format.

Circle (253) on Reply Card



# DIGITAL STL BREAKTHROUGH



## *Introducing the TFT DMM92: The Better Digital STL System*

**W**ould you like to extend the fade margin of your existing analog STL by 20 dB or more? Extend Signal-to-Noise Ratio by at least 10db? Extend STL distance by miles? All with the bandwidth efficiency of 15-level duobinary modulation? There's just one digital STL system that lets you do it all—TFT's new DMM92. It works with your existing composite STL to give you vastly extended performance, and a whole lot more:

### ◆ **More Channels** —

- ◆ Six audio channels, 4 program and 2 voice
- ◆ Co-exists with FM SCA/MUX channels
- ◆ AES/EBU and 32 kbps data channel available


### ◆ **More Flexibility** —

- ◆ Internal, or external **apt-X** DIGITAL COMPRESSION, MUSICAM & Dolby audio codecs
- ◆ Instant plug-in installation with virtually **any** STL
- ◆ Useable for LMA's and duopoly applications

### ◆ **More Useable RF Spectrum** —

- ◆ Six audio channels in a 250kHz RF slot
- ◆ Perfect for highly congested markets
- ◆ Tolerant to co-channel interference

COMPOSITE BASEBAND

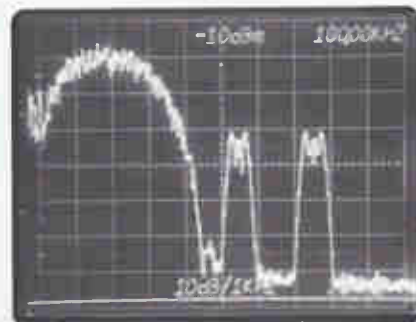

2 x 15 kHz, 2 x 7.5 kHz, 1 x 9600 baud  
RS232, 110 kHz and 152 kHz Subcarriers.

*to complete the system:*

### **New TFT 9100 Composite STL**

- ◆ Ideal for use with DMM92
- ◆ Frequency-synthesized, field-programmable Tx and Rx
- ◆ Patented IF Modulation for superior performance
- ◆ Very sharp cavity RF filter, phase linear IF SAW filter



TFT 9100/9107 STL Tx and Rx.

### *Sound Quality for over 20 Years*

3090 Oakmead Village Drive • Santa Clara • California 95051  
Toll Free: 1-800-347-3383 • Tel: 408-727-7272 • Fax: 408-727-5942

Circle (11) on Reply Card



Continued from page 12

sign. Installation of a monochrome card and a graphics card allows two separate screen appearances, so the talent doesn't see caller information while it's being typed in.

The program is multilingual and can display information in Spanish, German and French. In fact, the call screener and the talent each can be using different languages simultaneously.

Like the other two programs, it allows text messages to be sent by the call screener to the host. Its capacity for an additional full-screen message presents numerous other possibilities, however. It could simply contain a canned message (contest rules maybe), or in a networked environment, it could function as a bridge between a newsroom computer system and the talk-show talent. The information for the full-screen message is stored in a file on the hard disk. A newsroom computer system could be programmed to write to that file via a network link bulletin, news updates, scores and so forth, which

the producer could hot-key in to the talent.

The system can display information for up to 20 telephone lines, and it includes a module to duplicate studio display on a laptop at a remote site via modem. There is no inherent provision for telephone system control from the remote computer, but some additional dedicated control hardware at the site can remotely control studio phone interfaces.

---

***One item that's certainly ahead for call-screener software is the incorporation of Caller ID.***

---

The program sells for \$349. Version 1 users can get a free upgrade, and technical support is free.

**On the horizon**

One item that's certainly ahead for call screener-software is the incorporation of *Caller ID*. The designers of Screener III and Call Screen Manager

are both playing with it. Catching the Caller ID data could save the call screener a lot of typing. Comparing that information with the stored database could flag callers who have made you hit the dump button in the past, and make enforcement of once-a-week or other caller limits easier.

As yet, call screening is a strictly MS-DOS universe — there's nothing out there for Mac, Windows or OS2. With newsroom, facility-control, digital audio workstation and program-automation computer systems already competing for space in the broadcast studio, a multitasking platform could provide some relief. The small potential user-base and requirement for extreme reliability probably have kept this from happening yet, however.

TalkStar, Screener III and Call Screen Manager are all available in demo form. Each provides a good deal of function and some elegance for an outlay of \$300 to \$800.

**BE**  
*Radio*

## THE RF EXPERTS KNOW—MYAT DELIVERS

### MYAT DELIVERS QUALITY

**Y**ou can rely on MYAT rigid line and components to deliver a clean, powerful signal to your antenna. Pure highest quality copper, brass and silver plus computer-aided design and manufacturing ensure consistency and accuracy. No wonder demanding broadcasters worldwide choose MYAT products for their passive systems. We take Quality Control very seriously.

### MYAT DELIVERS RELIABLE PERFORMANCE

**O**ur non-galling silver-plated beryllium copper contact springs, brass elbow reinforcements and virgin Teflon inner supports are designed for maximum velocity, minimum attenuation and long service life. Every MYAT component is tested before shipping and backed with a full one year warranty. MYAT products are built for the long run.

### MYAT DELIVERS WHEN YOU NEED IT

**M**ajor transmitter manufacturers with strict production schedules rely on MYAT to deliver quality components on time and within budget. So do leading broadcasters like the Empire State Building's newest TV tenants. At MYAT, commitments are kept.

### LET MYAT DELIVER FOR YOU

**W**hether you're planning a new tower, upgrading an older installation, or coping with an emergency, you can depend on MYAT rigid line and components. Thousands of RF experts around the world already do. Contact your RF distributor, or phone us for our catalog, installation planning guide and engineering reference. Its detailed drawings can help you put together an efficient, trouble-free transmission line that will last for decades. For a free copy call 201-767-5380 or fax 201-767-4147.

### RIGID LINE: RADIO'S EFFICIENT CHOICE


**40 YEARS OF EXPERIENCE, 40 YEARS OF EXCELLENCE**

380 Chestnut Street • P.O. Box 425 • Norwood, NJ, 07648  
Tel 201-767-5380 • Fax 201-767-4147

Circle (12) on Reply Card



Manufacturers of electronic  
transmission equipment  
since 1951.

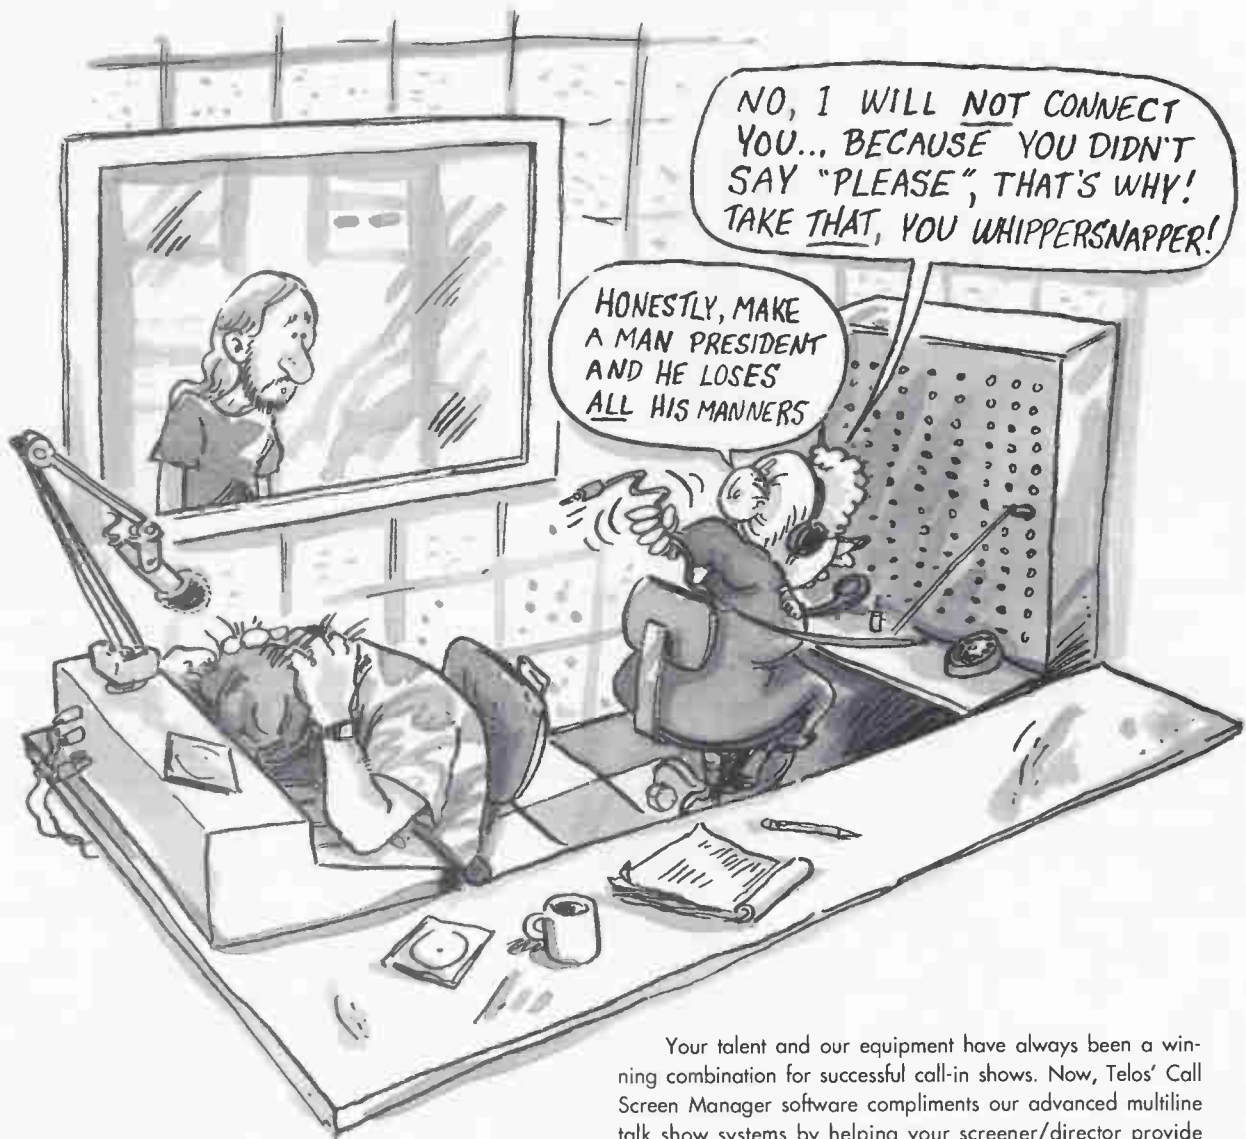

## Call Screen Manager

Talk Show Management Software



Your talent and our equipment have always been a winning combination for successful call-in shows. Now, Telos' Call Screen Manager software compliments our advanced multiline talk show systems by helping your screener/director provide your talent with information on each caller.

Call Screen Manager uses inexpensive IBM-compatible PCs and peripherals and you can choose two different screen views, so information is always displayed in the most useful, easy-to-interpret format. Features include real-time display of line status; full page and quick messages that may be stored and sent with simple keystroke combinations; a caller information database module with modifiable data fields and report and export capabilities; and the ability to accomplish most critical screener functions from the computer keyboard.

Two versions of Call Screen Manager are available. Host Software provides for a director position and any number of talent positions using a single PC. Remote Software allows communications between the studio and talent located at a remote site via modem.

So hire the best and give them the tools they need. Isn't it time you experienced the pleasure of great phones?



2101 Superior Avenue • Cleveland, Ohio 44114  
216.241.7225 • FAX: 216.241.4103

### On-air console

By Auditronics

- **Destiny 2000**: first on-air control board that allows a station to go from total automation to fully live with the flick of a switch; doubles as a production board when the system is in Auto mode; can control CD jukeboxes; works with music, traffic and program scheduling personnel and software, displaying everything in full color; when in Assist mode, touchscreen capability accesses a Main screen, Music library and Spot library for quick and easy additions, deletions or rescheduling; FastTrack feature gives instant access to thousands of announcements, sound effects, jingles, IDs and promos.

Circle (257) on Reply Card



### Recording mixer

By Soundcraft

- **Soundcraft LM1**: fully professional location recording mixer; features aluminum castings and durable gold-plated switching; however, the console is light enough to be transportable; an integral carrying handle also serves as a sturdy support; can be powered by either a DC input, in the range of 8-30V, or from internal rechargeable cells, providing up to 18 hours of continuous operation.



Circle (269) on Reply Card

### Digital audio codec

By RE America

- **MUSICAM 660/661**: provides up to 20kHz of audio bandwidth and features mono, dual mono, stereo and joint stereo operation, with selectable bit rates from 56-384kbit/s; applications include network program distribution, remote pickups for sports, concerts, special events, news gathering, STL backup, audio backhaul, recording and post-production studios; automatically adjusts to the network bit rate; standard features include AES/EBU and SPDIF digital interface; two times V.35, X.21 or RS-422 interface; and a front-panel digital headphone jack for monitoring of digital or analog inputs.

Circle (264) on Reply Card

### Codecs

By RE America

- **663/662 ISDN MUSICAM decoder/encoder**: capable of multiplexing up to three basic rate interface ISDN lines; can dial bandwidth on demand between 56kbit/s and 384kbit/s; supports both Euro ISDN and American NI-1 (National ISDN-1); bandwidth-on-demand offers complete user flexibility in choosing the program quality and bandwidth; can be paired with the RE 660/661 MUSICAM codecs to provide full bandwidth, bidirectional, stereo programming at any ISDN network rate up to 384kbits; features three network terminal adapters that are tied to an inverse multiplexer; standard features include AES/EBU or SPDIF digital audio inputs and outputs with built-in sample rate converter; unique front-panel mount standard telephone interface that allows for telephone talkback using your own single-line telephone handsets or ISDN-ready telephone handsets.

Circle (265) on Reply Card

### Graphical interface

By Computer Concepts

- **DCS Live!**: Microsoft Windows-based graphical interface for DCS that runs on its own computer; features touchscreen capability and on-screen virtual "carts" and "cart machines"; main screen features two play and one record/play machine plus a queue of upcoming events; FlexKey buttonbox is now on-screen and can be customized and stored by individual operators as their own unique files for later recall; can control multiple DCS machines from a central location.

Circle (258) on Reply Card

### Digital audio satellite receiver

By ProfLine

- **DA2500**: specifically designed for SCPC point-to-multipoint applications; features include 256kb/s, 4:1 compressed digital audio; C- and Ku-band SCPC operation; frequency agile across satellite band; 1/2 rate FEC; 15kHz audio; fully addressable per channel; auxiliary data; compact design; FCC certified.

Circle (261) on Reply Card

### Digital audio encoder/decoder

By ProfLine

- **DA1000**: compresses digital audio data 4:1 without audible degradation; features include high-error immunity; low hardware costs; low coding delay; mono, stereo or multichannel operation; suitable for a wide range of uses; compact design.

Circle (262) on Reply Card

### Studio chassis

By Orban

- **8200 ST OPTIMOD**: accessory for use with Orban's OPTIMOD-FM 8200 digital audio processor and OPTIMOD-AM audio processors; designed to optimize the left/right studio-to-transmitter link; protects the STL from overload, providing a well-controlled signal with dynamic control; uses Orban's Class-A VCA proprietary topology to ensure negligible distortion; combines automatic gain controller (AGC), high-frequency limiting and final peak control; user features include a built-in 100% modulation calibration tone generator, variable density and stereo couple/uncouple switch.

Circle (263) on Reply Card

# Everything you've always wanted in a radio studio

## except the paper, the carts, the logs, the errors...

### MASTER ■■■■ ■■■ CONTROL

- Master Control gives you the peerless sonic performance you expect from a digital audio system and more! It's completely modular, so you can expand it as your needs change.
- In it's ultimate configuration, Master Control provides seamless integration of the entire RCS software line and puts you in control. Of course, all of this is backed by our unparalleled support.
- If you're planning digital audio for your station (or you just want a peek at the future), don't make a move without seeing Master Control from RCS.



**RADIO COMPUTING SERVICES, INC.**

Two Overhill Rd. Suite 100 Scarsdale, New York 10583

Tel.(914)723-8567

Fax.(914)723-6651

Circle (14) on Reply Card

**Event sequencer**

By Circuit Research Labs



• **Real Time Event Sequencer Version 2.0:** new features include added seconds, which allow an event to be programmed to the second; control of each month's weekly sequences of events for a year; control of 255 events; and free terminal software; remote synchronizing lets user remote-control input to synchronize the Real Time Event Sequencer's internal clock.

Circle (252) on Reply Card

**Aural exciter**

By Aphex



• **Model 323:** features enhancements to the compellor and aural exciter circuitry; built-in intelligence controls the attack and release characteristics of the leveler and compressor based on the texture of the input; incorporates improvements, such as harmonics adjustment and lower noise, plus improved servo-balanced input and output; other enhancements include switchable leveling speed and one-button control to select input, output and gain reduction monitoring.

Circle (259) on Reply Card

**Add-on monitoring system**

By Studio Technologies

• **StudioComm:** family of flexible products that work in conjunction with digital audio workstations to route audio and provide a talkback system; features include control room and studio monitoring, integrated head-phone (cue) system and dub (copy) output; communications functions include talk to studio, talk to headphones and slate.

Circle (260) on Reply Card

**Digital audio cart machine**

By Digital Broadcast Associates

• **dB-CART/MO:** provides linear, non-compressed digital recording on removable media using ASPECT standard; capable of multiple sample rates; equipped with the AES/EBU standard 48kHz sampling rate; can record and playback material as long as 11 minutes per disk using 3.5-inch magneto-optical media.

Circle (256) on Reply Card

interferers in your area as a starting point.

Frequency protection payments are like health insurance—benefits are only needed in case of a problem, but when problems occur, other costs can be avoided. Continuous payment protects your earth terminal investment and the network or remote service it provides to your station. Some users, such as TCI or NPR, consider the fees to be cheap insurance and pay to protect all their downlinks. Each earth terminal user must make his or her own assessment whether the services provided by a frequency protector are worth the money.

Regarding shared use of the Ku-band, I didn't have a copy of Part 21 in front of me when I wrote the article. I stand corrected that the domestic Ku-band is shared with one terrestrial service (LTTs). This service is secondary, and cannot legally cause interference to Ku-band satellite uplinks or downlinks. The market for frequency protection in this band is quite small. Comsearch, for example, does not sell protection services in this band unless the customer insists. Therefore, my statement that "frequency coordination is rarely a problem" is correct for the domestic Ku-band. International Ku-Band, however, does share with terrestrial common carriers.

**Greg Monti**  
National Public Radio  
Washington, DC



**BE READERS**

Let us know what you think.

Fax your comments to the BE editors

at the

BE FAXback line:

913-967-1905



**Portable DAT recorders**

By HHB

- **PDR1000**: uses a rugged 4-head, 4-motor transport derived from DDS technology to ensure reliability; features include 44.1kHz, 48kHz and 32kHz selectable sampling rates, balanced XLR mic/line inputs, AES/EBU/SP-DIF digital I/Os and 48V phantom powering; uses nickel metal hydride rechargeable battery technology.

- **PDR1000TC** (time code): has all the same features as the PDR1000, plus it

is equipped to jam sync, convert absolute time to time code, and to record, generate and reference to time code in all existing international standards.



Circle (268) on Reply Card

**Wireless mic systems**

By Audio-Technica



- **ATW-1235 and ATW-1236**: both systems use the ATW-12 receiver, which features dual diversity operation with two independent RF sections on the same frequency; automatic logic circuitry continually compares and selects the superior received signal, providing better sound quality and reducing the possibility of interference and dropouts; half the width of a standard 19-inch rack mount, two receivers can be mounted side-by-side.

Circle (267) on Reply Card

**Microphone mixer**

By Audio-Technica

- **AT-MX341 SmartMixer**: microprocessor-controlled, automatic-switching, 4-channel microphone mixer; features two modes of operation to which each microphone can be independently switched via front-panel priority preselect switches; microphone attenuation is factory set at 8dB but can be internally adjusted between 6dB and 20dB; a combination of the two modes can also be used on the AT-MX341; also features female XLR-balanced inputs and a line-level output through a male XLR connector; 7-light LED output level meter on the front panel accurately indicates mixer activity, showing when a mic is on and when the lockout bus is active.

Circle (266) on Reply Card



Totally solid state AMPFET ND 10 10kW AM

**FOR THE WORLD'S STRONGEST AM TRANSMITTERS, LOOK TO NAUTEL.**

Nautel AM transmitters keep you on the air with an unmatched combination of value, performance and reliability.

**Low cost of ownership** — with typical efficiency ratings up to 80 percent, a totally solid state Nautel transmitter pays for itself in tube replacement and utility.

**Superior audio transparency** — Nautel AM transmitters utilize inherently linear Pulse Duration Modulation for the cleanest sound you can broadcast. Audio is ruler-flat throughout the range and distortion is typically less than 0.5%.

**Field-proven reliability** — Nautel transmitters give you multiple protection systems for both power line and lighting transients, VSWR protection, soft failure design, reserve cooling and safe on-air servicing.



Removable AM Power Module

**Make a strong transmitter choice. Call us today for all the facts on our totally solid state AM and FM transmitters.**



**Nautel Maine Inc.**  
201 Target Industrial Circle  
Bangor, Maine 04401 USA  
Phone: (902) 823-2233

**Nautel**  
(Nautel Electronic Laboratories Limited)  
R. R. #1, Tantallon, Halifax County  
Nova Scotia, Canada B0J 3J0  
Fax: (902) 823-3183

## AD INDEX

## SALES OFFICES

	Page Number	Fast Fact Number	Advertiser Hotline
AEV .....	20	23 .....	
Arrakis Systems .....	IFC	1 .....	303-224-2248
Audio Precision .....	21	24 .....	800-231-7350
Broadcast Supply Worldwide .....	19	22 .....	800-426-8434
CCS Consultants .....	26	27 .....	908-946-3800
Computer Concepts Corp. ....	25	28 .....	913-541-0900
Continental Electronics .....	8	8 .....	214-381-7161
Denon .....	BC	4 .....	201-575-7810
Dolby Labs Inc. ....	13	18 .....	415-558-0200
Enco Systems Inc. ....	18	21 .....	800-ENCO-SYS
Eventide, Inc. ....	27	10 .....	201-641-1200
Harris Allied Systems .....	15	17 .....	217-222-8290
Intraplex, Inc. ....	24	26 .....	508-486-3722
Itame .....	7	9 .....	
ITC-International Tapetronics Corporation .....	17	20 .....	800-447-0414
Modulation Sciences .....	16	19 .....	800-826-2603
Myat .....	30	12 .....	201-767-5380
Nautel Electronics .....	35	2 .....	902-823-2233
Orban, Div. of AKG Acoustics .....	5	6 .....	510-351-3500
Otari Corp. ....	23	25 .....	415-341-5900
Pacific Recorders & Engineering Corp. ....	3	5 .....	619-438-3911
Pioneer New Media Tech .....	9	7 .....	800-LASER-ON
Radio Computing Services .....	33	14 .....	914-723-8567
Telos Systems .....	31	13 .....	216-241-7225
TFT .....	29	11 .....	800-347-3383
Thomcast .....	11	16 .....	
Wheatstone Corporation .....	IBC	3 .....	315-452-5000

### NEW YORK, NEW YORK

*Gordon & Associates*  
*Josh Gordon*  
210 President Street, Brooklyn, NY 11231  
Telephone: (718) 802-0488  
FAX: (718) 522-4751

*Joanne Melton*  
888 7th Avenue, 38th Floor  
New York, NY 10106  
Telephone: (212) 332-0628  
FAX: (212) 332-0663

### CHICAGO, ILLINOIS

*Vytas Urbonas*  
55 East Jackson, Suite 1100  
Chicago, IL 60604  
Telephone: (312) 435-2361  
FAX: (312) 922-1408

### AGOURA HILLS, CALIFORNIA

*Duane Hefner*  
5236 Colodny Ave., Suite 108  
Agoura Hills, CA 91301  
Telephone: (818) 707-6476  
FAX: (818) 707-2313

### SANTA MONICA, CALIFORNIA

*MC<sup>2</sup> Magazine Communications  
Marketing Corp.*  
*Jason Perlman*  
501 Santa Monica Blvd., Ste. 401  
Santa Monica, CA 90401  
Telephone: (310) 458-9987  
FAX: (310) 393-2381

### OXFORD, ENGLAND

*Richard Woolley*  
Intertec Publishing Corp.  
Unit 3, Farm Business Centre,  
Clifton Road, Deddington,  
Oxford OX154TP England  
Telephone: (0869) 38794  
FAX: (0869) 38040  
Telex: 837469 BES G

### TOKYO, JAPAN

*Mashy Yoshikawa*  
Orient Echo, Inc., 1101 Grand Maison  
Shimomiyabi-Cho 2-18  
Shinjuku-ku, Tokyo 162, Japan  
Telephone: (3) 3235-5961  
FAX: (3) 3235-5852  
Telex: J-33376 MYORIENT

### FREWVILLE, SOUTH AUSTRALIA

*Hastwell, Williamson, Rep. Pty. Ltd.*  
*John Williamson*  
109 Conyngham Street  
Frewville 5063, South Australia  
Telephone: 799-522, FAX: 08 79 9522  
Telex: AA87113 HANDM

### CLASSIFIED ADVERTISING OVERLAND PARK, KANSAS

*Renée Hambleton*  
P.O. Box 12901  
Overland Park, KS 66282  
Telephone: (913) 967-1732  
FAX: (913) 967-1735

# The Closer You Get...

**WE MEAN IT**—we really DO provide the quality, performance, technical support, and innovation we promise!

Our model A-500 is a thoroughly engineered on-air console: it delivers the level of performance your clients now expect, and DAB demands. All components are selected for long life—gold bus connectors, gold I/O connectors, all gold contact switches, gas-filled relays, triple burned-in integrated circuits, solid state ON/OFF lamps, and precision laminated Lexan control surfaces for a lasting, wearproof finish. And we back that up with a 3-year parts and labor warranty, complete with

factory support from a technically competent and responsive staff.

We've also handled your special requirements as well with a super family of accessories, including a choice of three different telephone modules, an intercom module, an off-line mixer module for your remote feeds, talent control stations, accessory panels, failsafe power supplies, and auto cart and CD sequencing options.

**So take a close look:** we've got the quality, we've got the innovations, and you've got our commitment to top-notch support.

# The BETTER We Look!

 Wheatstone<sup>®</sup> Corporation

5720 V.I.P. Parkway, Syosset, NY 11211 (tel 315-453-7763; fax 315-454-3764)

Circle (3) on Reply Card

# The Pro CD Player that can read your playlist.



In broadcast circles, Denon CD Cart™ Players are the machines of choice. Now, broadcasters have an even greater choice—with the DN-951FA CD Cart and its Auto Track Select (ATS) system. This intelligent design reads bar-coded carts (easy-to-program ACD-5B cartridges) to lock-in, lock-out or auto-cue to a specific track.

Every Denon broadcast CD player reads Phillips Orange Book CDs. When used in conjunction with CD-R recorders, you no longer tie up your recorder for playback. Instead, record your tracks one at a time, and when your CD is full (99 tracks), write the TOC and archive spots for as little as 15c each!

Most importantly, both the DN-961FA Drawer Loading model and the DN-951FA are from Denon, who for 83 years has been serving the needs of audio professionals and for 21 years has been advancing the art of digital audio.



DN-951FA  
CD CART PLAYER



DN-961FA DRAWER  
LOADING CD PLAYER

Denon America, Inc., 222 New Road, Parsippany, NJ 07054 (201) 575-7810

**DENON**  
The Industry Standard.

Circle (4) on Reply Card