

Practical

AUGUST 1988 £1.20

ISSN 0141-0857

Wireless

The Radio Magazine



**BUILD
OUR
MULTI-PURPOSE
ZENER DIODE TESTER**

PLUS LOW-COST INDOOR ANTENNA FOR 144MHz
AND PW REVIEW-YAESU FT-212RH

"They said I couldn't work DX with just 100 watts. Especially with a radio that has less than 1000 switches on the front panel.

But the truth is, I'm working lots of DX, more than some of these blockbuster types, thanks to my Yaesu FT-747GX.

You see, my no-nonsense FT-747GX was designed with me in mind, so I can hop around the band fast to nail those DX stations. While the other hams are warming up their amplifiers, I'm working the new country!

My FT-747GX has a super receiver, with a directly-driven mixer for great overload protection. And, Yaesu included the CW filter in the purchase price

(I used the money I saved on postage for the QSL cards!).

And my FT-747GX is loaded with other features. The receiver works from 100kHz straight through 30MHz, and it's a fantastic shortwave broadcast receiver. I can use all twenty memories for that alone! Plus it's got dual VFOs. A noise blanker. Split frequency operation for the pile-ups. And scanning up the band helps me check out openings as they happen.

I just put in the optional crystal oven, and next month I'm going to pick up the FM board.

And with the money I saved when I bought my FT-747GX, I got a second ten-metre antenna for satellite work on the high end of the band. I use my personal

computer to tell me what satellites are going by, and the computer even sets the frequencies on the radio for me.

Now my friends are getting FT-747GX rigs, too. I knew they'd figure out my secret weapon sooner or later. But now I'm setting the pace!

Thanks, Yaesu. You've made a rig that makes sense, at a price I can afford."

South Midlands Communications Ltd

S.M. House, School Close,
Chandlers Ford Industrial Estate,
Eastleigh, Hants SO5 3BY
Tel: (0703) 255111

UK Sole Distributor

YAESU

**"They laughed when they saw my radio.
Then they saw my logbook."**



Practical Wireless

The Radio Magazine

AUGUST 1988 (ON SALE 14 JUL 1988)

VOL. 64 NO. 8 ISSUE 977

NEXT MONTH

8-page Pull-out
Supplement:
"In the Know"

Doppler Shift
on Satellites—1

"Valved Comms
Receivers"
The BC-348
(Part 1)

The Alinco
ALD-24E Dual-
Band Transceiver
Reviewed

and
All the usual
features

Don't miss
it—place
your order with
your
newsagent now!

On sale August 11

Contents subject to last-minute revision

- 19 PW Review**
Yaesu FT-212RH VHF Mobile Transceiver
Mike Richards G4WNC
- 22 Multi-Purpose Zener Diode Tester**
E. W. Nield GW3ARP
- 24 Computing Corner**
Paul Newman
- 30 Crops and Colls—1**
George Pickworth
- 32 Apartment HF Transmitting Antennas—2**
Richard Q. Marris G2BZQ
- 36 Communications '88**
Brian Dance
- 38 Practically Yours**
Glen Ross G8MWR
- 39 Amateur Radio in Australia—4**
Greg Baker
- 44 Low-Cost Indoor Antenna for 144MHz**
F. C. Judd G2BCX
- 46 Errors and Updates**
UK Amateur Beacon Databcard, May 1988
The Eightypole, May 1988
Getting to Know Your End-Fed $\lambda/2$, June 1988
LED Brightness Controller, June 1988
- 47 Understanding Circuit Diagrams—6**
R. F. Fautley G3ASG
- 49 'Antenna Books—Special Offer'**
- 50 Three Keys in One**
J. Worthington GW3COI
- 50 The MISFET**
Brian Dance
- 52 Amateur Radio Stateside—2**
David Jardine G0FDV

Regular Features

71 Advert Index	14,27 Newsdesk	71 Short Wave Magazine
28 Binders	54 On the Air	28 Subscriptions
46 Bookshelf	68 PCB Service	38 Swap Spot
40 Book Service	26 PW Services	12 Write On
12 Comment		

Editor

Geoff Arnold T.Eng FSERT G3GSR

Assistant Editor

Dick Ganderton C.Eng MIERE G8VFN

Art Editor

Steve Hunt

Technical Features Editor

Elaine Richards G4LFM

Technical Projects Sub-Editor

Richard Aylay G6AKG

Editorial Assistant

Sharon George

Technical Artist

Rob Mackie

Administration Manager

Kathy Moore

Clerical Assistant

Claire Jackson

Accounts

Alan Burgess

Editorial and

Advertisement Offices:

Practical Wireless

Enefco House

The Quay

Poole, Dorset BH15 1PP

☎ Poole (0202) 678558

(Out-of-hours service by answering machine)

FAX Poole (0202) 666244

Prestel 202671191

Advertisement Manager

Roger Hall G4TNT

PO Box 948

London SW6 2DS

☎ 01-731 6222

Cellphone 0860 511382

Advert Copy and Make-up

☎ Poole (0202) 676033

COPYRIGHT © PW Publishing Limited 1988. Copyright in all drawings, photographs, and articles published in *Practical Wireless* is fully protected and reproduction or imitation in whole or in part is expressly forbidden. All reasonable precautions are taken by *Practical Wireless* to ensure that the advice and data given to our readers are reliable. We cannot however guarantee it and we cannot accept legal responsibility for it. Prices are those current as we go to press.

Practical Wireless, August 1988

www.americanradiohistory.com

ARE COMMUNICATIONS

TALES FROM THE DALES

Our "friends" in Matlock have been making some very pointed accusations in their recent advertisements, referring to 'shady importers who cannot offer after sales service'.

We at ARE challenge them to name the so called 'shady importer' who kept a TS440 for six weeks and then supposedly lost it. If they feel that they cannot do this then at least will they admit that it was not ARE.

We service and supply spares, not only for all the equipment supplied by us, but also for any equipment supplied by any other company which is in need of service. WILL THEY DO THAT?

By the time you read this NEC will probably be over, but we will endeavour to hold our special prices for as long as possible, so please phone and let us quote our price for the equipment you want.

We are now importing both YAESU and KENWOOD direct from Japan and by cutting out the middle man we are able to offer better prices than most other suppliers. We are not a distributor so we do not have to add on a dealer's margin.

We also carry a full range of spares and are able to give 12 months guarantee on parts and labour on all new equipment and a limited warranty on most secondhand.

Perhaps we can do no better than publish just one of many letters which we have received from a customer which may help to convince anyone who may take notice of these adverse comments which from time-to-time emanate from the Dales of Derbyshire.

Clifford A. Tooke, G-1516
I.S.W.L. Awards Manager,
46 Richmond Drive,
Rayleigh,
Essex SS6 7RH
24 March 1988

Dear Sir,

Enclosed herewith, signed receipt of JRC radio NRD 525 Serial No. 43674, which arrived at 3pm on 22 March.

After unpacking radio from box, checking everything correct, I then spent 2 hours reading manual before trying out all controls and functions.

By 7pm, after tea was over and cleared away, I gave the receiver a good test, and I am very pleased with it's performance. Once all the controls and functions are mastered and remembered this should last me a lifetime.

Thank you all at A.R.E. for making me a very happy man - I will recommend your firm to all my friends who want quality and service.

yours faithfully
Clifford A. Tooke.

TS-680S HF and SIX Metre Transceiver



N.E.C. Exhibition Price
£899.00

Since our introduction of this remarkable transceiver last year, many of them are now in use throughout the U.K. Top-Band to Ten, including SIX Metres, plus a GENERAL COVERAGE RECEIVER thrown in!

FT47GX HF "Economy" Transceiver

An HF transceiver with built in General Coverage Receiver, All Mode including FM — for less than the price of a 2M multimode?



N.E.C. Exhibition Price £659.00 + Free FM BOARD and Microphone

FT767GXM HF +2M +6M +70CM

A complete Ham station in one package. All band, all Mode, built-in auto Aerial Tuner, 240V Power-supply, General Coverage Receiver, Digital Power/SWR meter 100W o/p (HF) Optional 2M/6/70CM modules just plug in.

N.E.C. Exhibition Price. Ask at the show!!

N.E.C. is here again and as usual A.R.E. Communications will be offering incredible part-exchange deals. Bring along any clean, working Amateur Radio equipment that we can take in part-exchange or SELL IT FOR YOU at the show. Remember! Bernie and Brenda are infrequently beaten on price OR customer service. With H.P. facilities available at NEC, you can literally walk away with your new purchase the same day!

Look forward to seeing you there. 73's Martin G4HKS.

STOP PRESS! Rumour has it that Brenda's special coffee will be available at the show!

Yaesu FT690R mk II

N.E.C. Exhibition Price
£375.00 including Linear
(£349.00 without Linear)

If you are not on SIX METRES yet, you certainly should be. What better way than to buy the new FT690R complete with a 15 watt output linear amplifier? And at the special N.E.C. Price!

Standard C500 Dual Band Handie

N.E.C. Exhibition Price
£339.00

You must have read our AD's by now, we've sold hundreds! 2M & 70CM, full Duplex, 138-170 MHz + 420-469 MHz. Many additional features. Take a look at our Exhibition price. . .

Yaesu FT736R Quad-Band Multimode

N.E.C. Exhibition Price
Ask at the Show!!

The KING of VHF/UHF Bass stations, the FT736R has all the facilities any discerning user may need, plus the two most important features: Uncompromised receive performance and a clean transmitted signal.

Our special offer available on the first 10 sets purchased during February was so popular, we have decided to re-introduce it for the N.E.C.!

Yaesu FT23R 2M HANDIE

Due to A.R.E. importing Offered to full U.K. spec., direct and cutting out the with FBA9 battery case, middle man, we really have helical antenna and strap. slashed the price of this one!

N.E.C. Exhibition Price
£195.00

Opening Hours Mon/Fri 9.30 to 5.30
Saturday by appointment Tel: 01-997 4476



A.R.E. Communications Limited, 6 Royal Parade,
Hanger Lane, Ealing, London W5A 1ET, England

Professional Tel: 01-997 4476 Fax: 01-991 2565 Telex: 94016185 AREC G

STAND B2 + C3
AT THE NEC

Come and see
us at Birmingham
15th, 16th & 17th JULY

AT LAST


A HIGH PERFORMANCE TRANSVERTER THAT'S USER FRIENDLY

This sophisticated, but simple to use range of transverters has performance characteristics and features previously not available. The output stage uses well rated PA devices and advanced filtering techniques which guarantee a low harmonic output while the ALC circuits

ensure a remarkably clean output signal. The receive section uses highly regarded MOS-FET's in an innovative active feedback configuration. Variable receive gain gives total control and allows the optimum signal to noise ratio to be achieved within the system.

Features:


- ★ Independent RX Output
- ★ Internal & External ALC
- ★ LED Bar Graph
- ★ Push Button Switches
- ★ Overdrive Protection
- ★ Low Harmonic Output
- ★ Rugged PA Section



Accessory socket with:-
8Vdc (ICOM TX/RX Drive Switching)
R.F. Switching
External PTT Output
PTT Input
+12V
Ground

SPECIFICATIONS	TL50-28-25	TL50-144-25	TL70-28-25	TL70-144-25	TL144-28-25
Frequency Range	50-52MHz		70-72MHz		144-146MHz
Input Frequency	28-30MHz 144-146MHz		28-30MHz 144-146MHz		28-30MHz
*Output Power high	25W		25W		25W
low	5W		5W		5W
Input power (adjustable)	100uW-500mW	1mW-1W	100uW-500mW	1mW-1W	100uW-500mW
Supply	(-10-+27dBm)		(-10-+27dBm)		(-10-+27dBm)
Switching	13.8Vdc @5A +/- 15%		13.8Vdc @5A +/- 15%		13.8V @5A +/- 15%
RX Gain	RF Vox & "hard wired" PTT				
ALC Range Input	9-26dB Variable				
Output	0 - -4Vdc				
	0 - -12Vdc				

*Fully adjustable from 1 to 25 Watts.

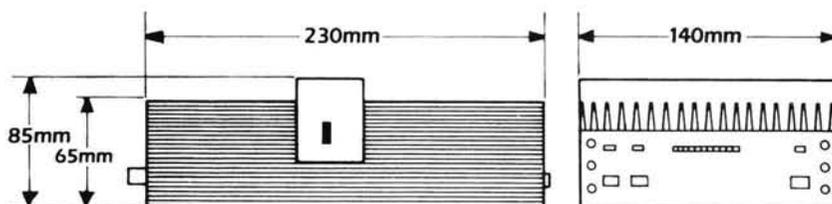

TL-50-28-25 £316.25
TL50-144-25 £299.00

TL70-28-25 £316.25
TL70-144-25 £299.00

TL144-28-25 £345.00

HOW TO ORDER

By phone: using your Access or Visa/Barclaycard
By mail: Cheque, Postal Order or Credit Card
Or from your local BNOS Authorized Dealer
Or see us on stand B2 & C3 at the NEC

Post, Packaging and Insurance should be
added to all orders
3 Working day delivery service

Orders with a total value less than £50
add £2.50 to total
Orders with a total value more than £50
add £5.00 to total
Orders with a total value more than £250
add £7.50 to total

Next day delivery service.
Orders any value add £15 to total.



B.N.O.S.
ELECTRONICS

Mill Lane, Stebbing, Dunmow, Essex, CM6 3SL.
Tel: 0371-86681 Tlx: 817763 BNOS G

E80E

ICOM



ICOM at the N.E.C.

At this years R.S.G.B. Exhibition the full range of ICOM Amateur Radio Equipment will be on display. ICOM (UK), the official UK importer will have their fully experienced sales team ready to discuss and recommend the ICOM products to suit you.

So come on down to NEC and see why ICOM is number 1. You will find us on stand B6 alongside R.S.G.B., B.C.N.U.

NEW! IC-32E Dual Band VHF/UHF FM handportable

Features:

- Full cross band duplex operation.
- 20 Dual band memories.
- Scanning.
- Compatible with ICOM accessories.
- 5 Watt output with IC-BP7 nicad.
- Small size.
- Power saver circuit.

When are ICOM going to produce a dual band handportable? This has been the most asked question about new ICOM products for a long time. The IC-32E is the answer.

This exciting new handportable offers full cross-band duplex operation, and with a built-in duplexer allows single antenna operation. 3 Watt output is standard but with the BP7 high power nicad pack or external 13.8v, 5 Watts can be achieved on both bands. The IC-32E comes packed with features, such as the 20 memory channels which can store both a VHF and UHF frequency in one memory and also simplex duplex condition, offset direction and frequency.

There is a choice of five scanning functions, full programmed memory, memory band and priority. The die-cast frame gives a solid construction featuring rubber gaskets for splashproof operation. The IC-32E is supplied with VHF/UHF a dual band antenna, BP3 battery pack and wall charger. OK, when are ICOM going to produce a new dual band mobile with full cross band duplex? The IC-3210E will be the answer.

Icom (UK) Ltd.

Dept PW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 363859. 24 Hour.

Count on us!

All Aboard at N.E.C.



Exclusive this year to ICOM stand at N.E.C. will be the Virgin Balloon Capsule "The Flyer" which was piloted by Richard Branson and Per Lindstrand who used ICOM equipment to co-ordinate the first successful crossing of the Atlantic by Hot Air Balloon.

Climb aboard the capsule and experience the conditions encountered by the two aviators. See how ICOM equipment was utilised for aeronautical communications. Do not miss the opportunity to see the "Flyer"!

Helpline: Telephone us free-of-charge on 0800 521 145, Mon-Fri 09.00-13.00 and 14.00-17.30. This service is strictly for obtaining information about or ordering Icom equipment. We regret this cannot be used by dealers or for repair enquiries and parts orders, thank you.

Datapost: Despatch on same day whenever possible.

Access & Barclaycard: Telephone orders taken by our mail order dept, instant credit & interest-free H.P.





South Midlands C

SCHOOL CLOSE, CHANDLERS FORD IND. EST., EAST

BRANCHES WITH SERVICE FACILITIES

BIRMINGHAM (021 327) 1497/6313

LEEDS (0532) 350606


FANTASTIC PERFORMANCE, FANTASTIC PRICE

NEW



- ★ 160-10M HF TRANSCEIVER
- ★ GENERAL COVERAGE RECEIVER
- ★ ALL MODE (FM OPTIONAL)
- ★ 0-100W OUTPUT (25W AM CARR.)
- ★ CW NARROW (500Hz) STANDARD
- ★ LARGE CLEAR LCD DISPLAY
- ★ SIMPLE OPERATION (see pic below)

The FT-747GX is a compact SSB/CW/Am and (optionally) FM transceiver providing 100 watts of PEP output on all hf amateur bands, and general coverage reception continuously from 100kHz to 30MHz. A front panel mounted loudspeaker and clear, unobstructed display and control layout make this set a real joy to use. Convenient features include operator selectable coarse and fine tuning steps optimized for each mode, dual (A/B) vfos, along with twenty memory channels which store mode and skip-scan status for auto resume scanning of selectable memories. Eighteen of the memories can also store independent transmit and receive frequencies for easy recall of split-frequency operations. Wideband (6kHz) AM and narrowband (500Hz) CW IF filters are included as standard, along with a clarifier, switchable 20dB receiver attenuator and noise blanker. User programming for more advanced control by an external computer is possible through the CAT (Computer Aided Transceiver) System. The transmitter power amplifier is enclosed in its own diecast aluminum heat-sink chamber inside the transceiver, with forced-air cooling by an internal fan allowing full power FM and packet, RTTY, SSTV and AMTOR operation when used with a heavy duty power supply.



All major controls are grouped together for convenience and ease of operation.

MD-1B8 Base Mic	£79.00	MH-1B8 Hand Mic	£21.00	FRB757 Relay Box	£10.50
MMB38 Mobile Mount	£22.00	FIF232C Interface	£75.00	FP757HD Heavy Duty P.S.U. £239.00	
D3000568 FM unit	£39.99	FC757AT Automatic ATU	£349.00	FL7000 500W P.E.P. Linear £1600.00	
FP700 Standard P.S.U. ...	£195.50	FAS14R Remote Ant. SW	£80.00	SP767 Ext. Spkr	£69.95
		TXCO 747	£28.95		

FT747GX TRANSCEIVER RRP £659.00 inc VAT

Serious about VHF/UHF? Then the FT736R is for YOU!



- ★ Up to four band capability
- ★ LSB/USB, CW & FM
- ★ Full Duplex crossband operation
- ★ Memory storage of up to 230 frequencies
- ★ Keypad frequency entry
- ★ Fourteen VFO's
- ★ Global call channel
- ★ Programmable channel steps
- ★ Electronic keyer option
- ★ Remote preamplifier switching
- ★ TXCO high stability reference oscillator

OPTIONAL ACCESSORIES

FEX 736/50	50MHz module	£239.00	XF455MC	600Hz Filter	£60.00
FEX 736/1.2	1.2GHz module	£425.00	SP767	External Spkr c/w Audio Filters	£69.95
FMP-1	AQS Message Processor c/w display	£189.00	MD-1B8	Desktop Microphone	£79.00
FTS-8	CTCSS Tone Squelch Unit	£45.00	MH-1B8	Hand Scanning Microphone	£21.00
FVS-1	Voice Synthesiser Unit	£33.00	FIF232Cvan	CAT/INC Interface for Packet & CAT	£68.95
Keyer Unit B	Internal Iambic Keyer Unit	£15.95	FIF232C	CAT Interface for RS232 O/P	£75.00
TV-736	Fast Scan TV (ATV) Mod Demod Unit	£159.00	FIF65A	CAT Interface for Apple II series	£60.00

FT736R R.R.P. £1450.00 C/W 2M & 70cms.

LEEDS
SMC (Northern)
Nowell Lane
Industrial Estate
Leeds LS9 6JE
Leeds (0532) 350606
9-5.30 Mon-Sat

CHESTERFIELD
SMC (Midlands)
102 High Street
New Whittington,
Chesterfield
(0246) 453340
9.30-5.30 Tues-Sat

BUCKLEY
SMC (TMP)
Unit 27, Pinfold Lane
Buckley, Clwyd
Buckley (0244) 549563
10-5 Tues, Weds, Fri
10-4 Sat

JERSEY
SMC (Jersey)
1 Belmont Gardens
St. Helier, Jersey
Jersey (0534) 77067
9-5 pm Mon-Sat
Closed Wed

N. IRELAND
SMC N. Ireland
10 Ward Avenue
Bangor
County Down
0247 271875

BIRMINGHAM
SMC (Birmingham)
504 Alum Rock Road
Alum Rock
Birmingham B8 3HX
(021-327) 1497/6313
9.00-5.00 Tues-Fri
9.00-4.00 Sat

AXMINSTER
Reg Ward & Co Ltd
1 Western Parade
West Street,
Axminster
Devon EX13 5NY
Axminster (0297) 34918
9-5.30 Tues-Sat



Southampton Showroom open 9.00-5.00 Monday to Friday, 9.00-1.00 Saturday. Service Dept open Mon-Fri 9.00-5.00
AGENTS: JOHN DOYLE, TRANSWORLD COMMS, NEATH (0639) 52374 DAY (0639) 2942 EVE

DAVID STENNING, G4JA, LOUTH 0507 604967

Communications Ltd. YAESU

WIMBORNE, HANTS. SO5 3BY TEL: 0703 255111 FAX: 0703 263507 TLX: 477351

CHESTERFIELD (0246) 453340

AXMINSTER (0297) 34918

LET THE RADIO DO THE TALKING!



We are pleased to announce a new series of FM VHF and UHF mobile transceivers for the amateur. The 45/5W FT-212RH and the 35/4W FT-712RH. Smaller than their predecessors these models utilize a new cpu with greatly expanded features, most notable of which are 19 memories and support for the DVS-1 Digital Voice System, which can digitally record and playback from the microphone or the receiver.

FT212RH..... £349.00.
 FT712RH..... £375.00.
 DVS1 Voice Memory Unit £79.00
 FTS12 CTCSS Unit £60.38

FT212RH & FT712RH



SUMMER SPECIALS

ONLY WHILST STOCKS LAST

HANDHELDS

FT709R (4) £199
 FT703R (3) £199
 FT703R (4) £199

MOBILES

FT770RH £279
 FT790R £299
 IC27E £349



YM2500L
 WD202
 SP4 + SPV100Z
 S72
 E72S
 E72L
 PLT101Z
 FMUT101Z
 AMUT101Z
 NDH518
 MS100
 MMS384
 MML144/40
 MMF432
 MMA70
 YF107F2.4
 YF107H12
 YF107H600
 YF90F2.4
 YF90H12
 TF30F12
 TF30H12
 TF90H600
 D4000006
 D4000007
 D4000008
 D3000337
 D3000253
 D3000112
 D3000105
 D3000098
 D3000071
 D3000286
 D3000031
 MMB1
 CFL230

DTMF Keyboard Mic CPU2500R
 SWR/PWR/Deviation meter
 Speech Processor
 Switch Box FT720 series
 Extension Cable 2m
 Extension Cable 4m
 Parts List FT101Z
 FM Unit FT101Z
 AM Unit FT101Z
 Memory Unit NRD515
 Magnetic Mobile Speaker
 Frequency Source
 2M 40w Linear
 432MHz Filter
 4m Preamp
 2.4KHz 10.7MHz 6 pole
 12KHz 10.7MHz 8 pole
 600Hz 10.7MHz 8 pole
 2.4KHz 9MHz 6 pole
 12KHz 9MHz 8 pole
 12KHz 3.18MHz 6 pole
 12KHz 3.18MHz 8 pole
 600Hz 9MHz 8 pole
 FTONE to FL2100Z Cable
 FTONE to FTV107 Cable
 FTONE to FC707 Cable
 FTV901 mod for FT980
 FTONE NB Mod. Kit
 FT901 Warc Mod. Kit
 YO901 Bandscope Unit
 UHF Modulator for Video YR901
 FT301 Counter Unit (Improved Type)
 Curtis Keyer Unit
 FT225 Memory Unit
 FT101/901 Mobile Mount
 300Hz CW Filter NRD515

£19.95
 £10.00
 £29.00*
 £10.00
 £7.50
 £9.50
 £1.00
 £39.00
 £5.00
 £175.00
 £9.00
 £19.95
 2 only £75.00*
 1 only £19.95
 1 only £25.00
 £15.50
 £15.50
 £15.50
 £15.50
 £15.50
 £15.50
 £15.50
 £15.50
 £15.50
 £1.50
 £1.50
 £1.50
 £1.00
 £10.00
 £7.50
 £15.00
 £19.50
 £5.00
 £29.00
 £19.95
 2 only £59.00
 £10.00*
 2 only £35.00*

MMB7
 FL2010
 FF5
 FMUT901
 AFR901
 AMUT77
 FP757GX
 FRV7700A
 DIG221RM0D
 XF8.9GF
 XF8.9GA
 FYG1
 BHF77
 IC27E
 FM740
 FM2033
 JD110
 GP27
 GP23
 88F
 430TV
 444D
 401B
 AR50
 CB86A
 MRKT77
 78B
 YD844A
 XF455C
 XF455CN
 XF82GA
 XF82HC
 XF82HCN
 XF82HSN
 MMB11
 TVHF230C

FT7 Mobile Mount £7.50
 2m 10W linear £39.00*
 500KHz Low Pass Filter £2.50
 FM Unit FT901 £29.00
 Low Tone Mod YR901 £7.50
 AM Unit FT77 £12.50
 Switch Mode PSU £69.00*
 Conv. 118-150MHz to 20-30MHz £29.50*
 Digital Display Buffer Kit £2.50
 FM Filter 12KHz £25.00
 AM Filter 6KHz FT901, 101Z, 980 £19.00
 Crystal checker £9.50
 Battery Holder FRG7 £1.50
 25w 2m FM Transceiver 2 only £349.00*
 70cms Transceiver FM £199.00*
 25w 2m Transceiver FM £199.00*
 SWR/PWR meter 1.5-150MHz Field Strength £12.50
 27MHz Base antenna £19.00*
 2m Colinear 3x3/8 £45.00*
 2m 8/8 Wave mobile £19.00*
 70cms for FTV series £199.00*
 Shure Mic 2 only £49.00
 Shure Mic Hand 600ohm £19.95
 Bell Rotator 3 only £99.00*
 April 86 Call book £1.00
 Marker Unit FT77 £7.50
 2m 7/8 wave Ball mount Antenna £15.00*
 Base Microphone £19.99
 500Hz CW Filter FT102 £29.95
 270Hz CW Filter FT102 £29.95
 6KHz AM Filter FT102 £15.00
 600Hz CW Filter FT102 £15.00
 300Hz CW Filter FT102 £15.00
 1.8KHz SSB Filter FT102 £19.95
 Mobile Mount FT290R £29.95
 Mutek HF Transverter 1 only £299.00*

* CARRIAGE ON THESE ITEMS £2.75 ALL OTHERS £1.00

ALL OFFERS SUBJECT TO AVAILABILITY. NO FINANCE AVAILABLE.

ALL RADIOS GUARANTEED FOR 1 YEAR EXCEPT FM740 & FP757GX - 90 DAYS ONLY

Prices & availability subject to change without prior notice.

FREE FINANCE . . .

On many regular priced items SMC offers free finance (on invoice balances over £120) 20% down and the balance over 6 months or 50% down and the balance over a year.

You pay no more than the RRP price!

Details of eligible items available on request.

FREE S.M.C. SERVICE INTERLINK DELIVERY . . .

Free interlink delivery on major equipment. Small items, Plugs, Sockets, etc by post £1.75. Antennas, Cables, Wire & larger items. Lynx up to £5.00 interlink delivery available, upon request, for items other than radios, from £7.30 depending on weight. Same day despatch whenever possible.

GUARANTEE

Importer warranty on Yaesu Musen products. Fully staffed and equipped Service Department. Daily contact with the Yaesu Musen factory. Tens of thousands of spares and test equipment. Twenty-five years of professional experience.



VIBROPLEX

"The Oldest Name In Amateur Radio"

NEW BRASS RACER IAMBIC



£54.59

The newest addition to the Vibroplex family — the Brass Racer Iambic — A distinctive new design of Iambic paddle crafted from solid brass and mounted on a base of polished hardwood. No springs to fly off the middle of a contact. Superior Vibroplex quality. Always worth the difference and now a new Vibroplex look.

BRASS RACER EK-1 NEW

An even more exciting step is the new Brass Racer EK-1, an electronic keyer built into the base of our new Brass Racer Iambic paddle. Using the Curtis 8044 chip, this self-contained keyer and paddle is fully Iambic with dot/dash insertion and adjustable speed control. Use on either tube or solid state rigs. The perfect unit for mobile, DXpedition, or just plain fun.



£99.00



THE IAMBIC

The distinctive look and quality of the Vibroplex Original is fashioned into the finest Iambic paddle anywhere. The dual paddles allows the operator to utilize automatic dot/dash insertion and other unique features of the modern electronic keyer. Vibroplex distinction for the modern operator.

Presentation £115.00
Deluxe £ 78.09
Standard £ 66.33



THE VIBROKEYER

The Vibrokeyer is designed for "Bug" operators who want to move to electronic keyers without relearning keying. The single lever paddle initiates the automatic dots and dashes of the electronic keyer with the same motion used to operate the "Bug". For those who want to combine traditional skill with modern electronics.

Deluxe £78.09
Standard £63.98

THE ORIGINAL

In 1890 Horace Martin searched for relief from the "glass arm" telegraph operators were getting from pounding the straight keys. His answer, the Vibroplex Original was an instant success. The vibrating lever bar automatically produces dots while dashes are made manually. Still popular today, the distinctive sound of the "Bug" can still be heard. It is the signature of the true C.W. expert.



Presentation £129.62
Deluxe £ 82.74
Standard £ 70.54

All of our keys are available in Standard and Deluxe models. The Original and the Iambic are also available in the Presentation models.

Standard Model: All Standard models come with a neat, crisp, textured, painted base with polished and chromed top parts. Attention to detail in the finishing process gives Vibroplex an unexcelled quality appearance. Highly conductive large coin-silver contacts provide a clear, sharp signal, and non-skid rubber feet keep the keyer in its place.

Deluxe Model: All Deluxe models feature a chromed base, buffed and polished to a mirror finish. As in fine watches and other precision instruments, their jeweled movement serves to prolong life, maintain smoother, easier operation and prevent binding.

Presentation Model: The Presentation model is the top of the line at the top. Available in the Original and Iambic, the Presentation features 24 carat gold-plated base top, engraved with name and call and makes a truly personal gift. The Original has the adjustable super speed control main spring for a wider range of sending speeds.

**DEWSBURY ELECTRONICS, 176 LOWER HIGH STREET,
Stourbridge, West Midlands, DY8 1TG
Tel: Stourbridge (0384) 390063/371228**

**TX - 3
RTTY/CW/ASCII TRANSCIVE**

Split-screen, type-ahead operation, 24 memories, clock, review store, callsign capture, RTTY auto CR/LF, CW software filtering and much more. Needs interface or TU. **BBC-B/Master** and **CBM64** tape £20, disc £22. **SPECTRUM** tape £35, +3 disc £37 inc. adapter board (needs interface/TU also).

Also **VIC20** RTTY/CW transceiver program, tape £20.

**RX - 4
RTTY/CW/AMTOR/SSTV RECEIVE**

This is still a best-selling program and it's easy to see why. Superb performance on all 4 modes, switch modes at a keypress to catch all the action. Text and picture store with dump to screen, printer or tape/disc. The essential software for the SWL. Needs interface. **BBC-B/Master**, **CBM64** tape £25, disc £27. **VIC20** tape £25. **SPECTRUM** tape £40, +3 disc £42 inc. adapter board (needs interface also). The **SPECTRUM** software-only version is still available £25, +3 disc £27.

TIF1 INTERFACE for TX-3 and RX-4. RTTY and CW filters, computer noise isolation for excellent reception. Transmit outputs for MIC, PTT and KEY. Kit £20 (assembled PCB + cables, connectors), ready-made £40 state rig. Available only with TX-3 or RX-4 software.

Also **MORSE TUTOR** £6, **LOGBOOK** £8, **RAE MATHS** £9 for BBC and CBM64 (disc £2 extra), **SPECTRUM**, **ELECTRON**, **VIC20**.

Prices include VAT and p&p, 1st Class inland, airmail overseas, normally by return. Eire, C.I., BFO deduct 13%.

technical software (P.W.)

Fron, Upper Llandwrog, Caernarfon LL54 7RF.

Tel. 0286 881886



SEE THESE PROGRAMS DEMONSTRATED AT THE NEC



RST

RST MAIL ORDER CO.
LANGREX SUPPLIES LTD.
1 MAYO ROAD,
CROYDON,
SURREY CR0 2QP.

**SPECIAL EXPRESS
MAIL ORDER SERVICE**

AZ31	2.75	EM81	2.50	PL519	6.00	6AK5	5.99	6K06	9.00
CL33	4.00	EM87	2.50	PL802	6.00	6AL5	1.50	6L6G	5.00
DY867	1.50	EN91	6.50	PY33	2.50	6AM6	6.02	6L6GC	7.50
DY802	1.50	EY51	2.75	PY81	1.50	6AN5	4.75	8L7	2.50
EB8CC	10.33	EY86	1.75	PY82	1.50	6ANBA	3.50	6L06	7.50
E180F	12.05	EY88	1.75	PY83	1.25	6A05	3.25	607	3.75
E810F	35.48	EY500A	3.00	PY88	2.00	6AR5	25.00	6S6	10.00
EABC80	1.25	EZ80	1.50	PY500A	4.00	6AS6	8.66	6SA7	3.00
EB91	1.50	EZ81	1.50	PY800	1.50	6AS7G	8.75	6SC7	2.75
EBF80	1.50	GY501	3.00	PY801	1.50	6AT6	1.25	6SG7M	2.50
EBF89	1.50	GZ32	4.00	QV002-6	38.00	6AUSGT	5.00	6S7J	3.25
EC91	8.00	GZ33	4.75	QV03-10	26.25	6AUS	2.50	6SK7	3.50
ECC33	4.50	GZ34	5.00	QV03-20A	48.38	6AW8A	3.75	6SL7GT	3.00
ECC35	4.50	GZ37	4.75	QV06-40A	46.00	6B7	3.25	6SN7GT	3.00
ECC81	1.75	KT61	5.00	QV03-12	6.80	6B8	3.25	6SS7	2.75
ECC82	1.75	KT66	15.00	R18	3.00	6BA6	1.50	6ST6	2.25
ECC83	1.75	KT77	12.00	R19	9.24	6BA7	5.00	6T86	2.50
ECC85	1.75	KT88	15.00	R18	3.00	6BE6	1.50	6V8T	4.25
ECC88	3.50	N78	15.00	R19	9.24	6BH6	2.50	6X4	3.00
EC91	8.93	OA2	3.25	SP41	6.00	6BJ6	2.25	6XSGT	1.75
ECF80	1.50	OB2	4.35	SP61	4.00	6BN6	2.00	12AX7	1.75
ECH35	3.00	OC3	2.50	U19	13.75	6BQ7A	3.50	12BA6	2.50
ECH42	3.50	OD3	2.50	U25	2.50	6BR7	6.00	12BE6	2.50
ECH81	3.00	OD3	2.50	U25	2.50	6BR8A	3.50	12BY7A	3.00
ECL80	1.50	PC86	2.50	U26	2.50	6BS7	6.00	12E1	20.00
ECL82	1.50	PC88	2.50	U37	12.00	6B8	3.25	12HG7	4.50
ECL83	3.00	PC92	1.75	UABC80	1.25	6B8A	1.50	30FL1/2	1.38
ECL86	1.75	PC97	1.75	UBF89	1.50	6B8B	5.00	30P4	2.50
EF37A	5.00	PC900	1.75	UCH42	2.50	6C4	1.25	30P19	2.50
EF39	2.75	PCF80	2.00	UCH81	2.50	6C6	3.50	30PL13	1.80
EF41	3.50	PCF82	1.50	UCH82	1.75	6C8BA	2.50	30PL14	1.80
EF42	4.50	PCF86	2.50	UCL83	2.75	6CD6GA	5.00	572B	65.00
EF50	2.50	PCF801	2.50	UF89	2.00	6CL6	3.75	805	45.00
EF54	5.00	PCF802	2.50	UL41	5.00	6CH6	13.00	807	3.75
EF55	3.50	PCF805	1.70	UL84	1.75	6CWA	8.00	811A	18.33
EF80	1.75	PCF808	1.70	UY41	4.00	6D6	3.50	812A	52.50
EF86	5.00	PCH200	3.00	UY85	2.25	6D05	7.50	813	65.00
EF91	2.95	PCL82	2.00	VR105/30	2.50	6D08B	4.75	866A	35.00
EF92	6.37	PCL83	3.00	VR105/30	2.50	6E8	3.00	872A	20.00
EF183	2.00	PCL84	2.00	Z759	25.00	6E85	1.85	931A	18.50
EF184	2.00	PCL85	2.50	Z803U	25.00	6F5	3.00	2050	7.50
EH90	1.75	PCL86	2.50	ZD21	3.25	6G6	2.75	5763	4.50
EL32	2.50	PCL805	2.50	3B28	50.00	6H6	3.00	5814A	4.00
EL33	5.00	PD500	6.00	4CX250B	58.00	6HS6	3.77	5842	12.00
EL34	5.00	PFL200	2.50	5R4GY	5.50	6J5	4.50	6080	14.00
EL36	2.50	PL36	2.50	5J4G	3.00	6J6	8.93	6146A	12.00
EL150	25.00	PL81	1.75	5V4G	2.50	6J7	4.75	6146B	12.00
EL81	5.25	PL82	1.50	5Y3GT	2.50	6J8BA	6.50	6550	12.50
EL84	2.25	PL83	2.50	5Z3	4.00	6J6C	7.50	6883B	12.50
EL86	2.75	PL84	2.00	5Z4GT	2.50	6J56C	7.50	6973	7.50
EL91	7.39	PL504	2.50	63OL2	1.75	6K6GT	2.75	7025	4.50
EL95	2.00	PL508	5.50	6A87	3.00	6K7	3.00	7027A	9.00
EL360	18.50	PL509	6.00	6A86	5.00	6K8	3.00	7360	22.50
								7586	15.00
								7587	23.00

Open daily to callers: Mon-Fri 9 a.m. - 5 p.m.
Values, Tubes and Transistors - Closed Saturday
Terms C.W.O. only, allow 7 days for delivery. Tel. 01 684 1166
Prices excluding VAT add 15%
Quotations for any types not listed S.A.E.
Post and packing £1.00 per order
Telex 946708
Fax: 01-684 3056
Prices correct when going to press



SPECTRUM COMMUNICATIONS

MANUFACTURERS OF RADIO EQUIPMENT AND KITS

CONVERTERS & TRANSVERTERS

RECEIVE CONVERTERS 4 or 6m antenna input, 10 or 2m i.f., variable gain 0-26dB, n.f. less than 3.5dB. Buffered local oscillator output, types RC4-10, RC4-2, RC6-10 and RC6-2. PCB kit £17.25, PCB built and tested £24.50, boxed kit £29.25, boxed, built and tested £41.00.

TRANSCEIVE CONVERTERS Single board version of receive converter and 500mW transmit converter. 10m drive 25mW to 500mW. Types TRC4-10 and TRC6-10. PCB kit £39.00, PCB built and tested £54.00, boxed kit £54.00, boxed, built and tested £83.25.

TRANSCEIVE CONVERTERS Separate receive converter and 2.5W transmit converter in a single boxed unit. 2m or 10m drive 10mW to 100mW only, requires r.f. sensing switch and attenuator for use with 2.5W 2m rigs. Types TRX4-10H, TRX4-2H, TRX6-10H and TRX6-2H. Boxed kit £60.00, boxed and built £99.50.

TRANSCEIVE CONVERTERS As above but including an interface providing RF sensing attenuation and PTT switching. 1/2W-5W 2M drive. Types TRX4-2I and TRX6-2I. Boxed kit £68.00, boxed and built £115.00.

RECEIVE PREAMPS

2, 4, 6, or 10 metres RF switched and DC sensing, 100W transmit handling power, gain 0-20dB adjustable by panel control, NF 1dB on 2M, 2dB on 4 & 6M, 3.5dB on 10M, 13.5V negative ground operation. Excellent performance at a reasonable price. Well made attractive boxed unit 77x70x39mm, an asset to any Ham shack. Types RP2S, RP4S, RP6S, & RP10S. PCB KIT £14.75, PCB BUILT £22.25, BOXED KIT £25.00, BOXED BUILT & TESTED £35.50.



FM CONVERSIONS

FOR YAESU & KENWOOD TRANSCEIVERS

FD311X & FM2000 for FT101, 101B, 101E, 101Z, 101ZD, 901, 902, 107, 107M, 77S, 77, 707, 200, 250, 7B, all £71.

FD311X & FM3000 for TS120V, 120S, 130V, 130S, 520, 520SE, 530, 830, 930, all £81.

State rig type when ordering.

CB to 10m

CB TO 10 FM CONVERSION BOARDS - THE FIRST COMMERCIALY AVAILABLE, suits all UK FM CB rigs to give 29.31 to 29.70MHz. Size only 63 x 40 x 13mm. Built and aligned board SC29 £18.50. Or send your rig and we'll fit it. £31.50 inc. return P&P for mobiles. £35 inc. for base rigs.

MULTIMODE CB CONVERSIONS, send your 120 channel rig and we'll convert it to give 28.01 to 29.70MHz in straight sequences without gaps. Colt 1200DX, Cobra 148, Hy Gain 5, Multimode 2, Major M360, Tristar 747 & 777, Super Star 360, Concorde, etc., £62 inc. return P&P. Jumbo or Colt Excalibur 1200, £65. 80 Channel rigs such as Stalker 9 or Major M588 are modified to give 28.31 to 29.70MHz in straight sequence without gaps, £55.00 inc. return P&P. 200 Channel in 4 bands of 50 are converted to give 28.00 to 30.00MHz or 28.00 to 29.70MHz as required. Super Hy Gain 5, Lafayette 1800, Super Star 2000. £45.00 inc. return P&P. Nato 2000 £52.50, Super Star 2000-5 x 40CH £70. Colt 1600, 4 x 40CH, £65.50



VAT & P&P INC PRICES
Delivery within 14 days if available.
24 hr answering.

SEE YOU AT THE
NEC 15, 16, 17 JULY

SHOP TIMES: 9am-1pm & 2pm-5pm TUES-FRI
9am-1pm & 2pm-4pm SAT
CLOSED SUNDAY & MONDAY

UNIT B6 MARABOUT INDUSTRIAL ESTATE, DORCHESTER, DORSET. TEL: 0305 62250

SOUTH MIDLANDS COMMUNICATIONS

POLARPHASER II



70cms
VERSION
NOW
AVAILABLE



Have you ever wanted to control the polarisation of your xy crossed Yagi from RH-LH, CIRCULAR, VERTICAL or HORIZONTAL, even whilst transmitting? Then this revolutionary product is what you have been waiting for!

The SMC POLARPHASER enables you to alter the polarisation of your aerials continuously through the full 360°.

For satellite users the benefits to be obtained from instantaneous shack control of polarisation are obvious, enabling effective utilization of receive capabilities and power resources along with the ability to reduce or even totally eliminate co-channel interference for terrestrial use.

	2 metre	70cms
VSWR	less than 1.5:1.	less than 1.3:1
Frequency	144-146MHz.	430-440 MHz
Power	150 Watts.	100 watts
Connectors	SO239 or 'N' (please specify).	'N' type

£49.00 inc VAT (SO239) £69.00 inc VAT
£54.00 inc VAT ('N') P&P £2.25

UK Patent No. 2157894A. Manufactured by S.M.C. Design by G2HCG




SEND LARGE SAE FOR DETAILS
SOUTH MIDLANDS COMMUNICATIONS LTD.
FREEPOST

EASTLEIGH, HANTS SO5 5ZU.
Tel (0703) 255111. Telex 477351 SMCMM G. Fax: (0703) 263507



J & M (Amateur Radio) G4GKU

36, WESTGATE, ELLAND,
W. YORKS HX5 0BB.
PHONE: (0422) 78485
Ask for John G4GKU



NOW A TRI-BAND MINI BEAM
AT A SENSIBLE PRICE

£69.95

10m, 15m, 20m

(TRADE ENQUIRIES WELCOME)

Direct from the manufacturer at a money saving £69.95 complete. Or in kit form or as spare parts. Ask for a quote.

Do you have a Camera/Hi-Fi/Radio/Binoculars or any technical item that you would like to part exchange for this antenna? If so just call and we will consider it.

CRICKLEWOOD ELECTRONICS LTD

It's no secret!



that there is a real difference at Cricklewood Electronics. That's why you should never be without the FREE CRICKLEWOOD ELECTRONICS COMPONENTS CATALOGUE, for sheer variety, competitive prices and service from the U.K.'s number one 100% component shop. No gimmicks, no gadgets or computers, just components, millions of them, all easily available by mail order, calling or credit card telephone orders. Just pick up the phone (or a pen) to get your FREE copy now (no SAE required). You have nothing to lose.

CRICKLEWOOD ELECTRONICS LTD.
40 Cricklewood Broadway NW2 3ET
01-450 0995 & 01-452 0161
ALL MAJOR CREDIT CARDS ACCEPTED
Telex 914977 Phone or write today

dressler

COMMUNICATIONS LTD.

**191 FRANCIS ROAD
LEYTON · E10 6NQ · LONDON**
TELEX 8953609 LEXTON G
PHONE 01-558 0854 01-556 1415
FAX 01-558 1298
OPEN MON - SAT 9AM - 5.30PM
INTEREST FREE HP FACILITIES AVAILABLE
ON MANY ITEMS PROMPT MAIL ORDER



**dressler - ara 30 -
active antenna**
50 kHz . . . 40 MHz
WITH LIMITED PERFORMANCE
UP TO 100MHz

Professional electronic circuitry with very wide dynamic range. Meets professional demands both in electronics and mechanical ruggedness. 1.2m long glass fibre rod. Circuit is built into waterproof 2.5 mm thick aluminium tube. Ideal for commercial and swl-receiving systems. £129. See Review in August 1985 Issue p 35.

NEW

**DRESSLER
ARA 900
ACTIVE ANTENNA**
50MHz to 1300MHz
Gain 17dB Typical
TECHNICAL SPECIFICATIONS
FOR ARA 900

Gain 17dB Typical (14-17dB)
Frequency Range 50-1300MHz
Noise Figure 1dB at 50-180MHz
1.5dB below 300MHz
2.0dB below 350MHz
2.7dB below 400MHz
3.0dB below 500MHz
3.8dB below 650MHz
4.5dB below 1300MHz
£139.00
Intercept Point 3rd Order +18dbm at Input
Post £3.00 or Securicor £7.00 extra

Both antennas come complete with 7 metres of cable, interface, power supply and brackets.



**NEW KENWOOD
TM 721E
DUAL BAND
FULL DUPLEX
£649.00**

**YAESU FRG-8800
SPECIAL OFFER
£575 or £675
INCLUDING**



OPTIONAL CONVERTER

**ICOM R71
General Coverage Receiver
£825**



FIRST CLASS SHORT WAVE RECEIVER. BUY THIS FOR £825 AND RECEIVE AN ARA 30 FREE.



**NOW AVAILABLE
Kenwood RZ1 - £399.00
Mobile Scanning Receiver**

**WHY GO ALL
THE WAY TO THE
NEC WHEN THE
BEST BARGAINS ARE
STILL HERE IN
LONDON!**

**ICOM R7000 25MHZ-2000MHZ
SPECIAL OFFER!!**



**FREE
ARA 900.
ACTIVE ANTENNA
WORTH £139.00
£969**

ALL SONY PRODUCTS UK SUPPLIED


SONY ICF 2001D **£325**
76-108 MHz
116-136 AIRBAND
153kHz-29.995MHz
FM - AM - SSB 32 MEMORIES
INC PSU, CARRY STRAP
& EARPHONE



NOW AVAILABLE ALSO IN PRESENTATION BOX COMPLETE WITH AN ACTIVE ANTENNA **£378.00** INCLUDING FREQUENCY LIST'S BOOKS

**SONY ICF 7600DS
76-108MHz** **£169**

76-108MHz
153kHz-29.995MHz
Complete with case,
mains power supply,
earphone and
frequency list.



**SONY PRO-80
150kHz-108MHz
115.15MHz-223MHz
AM + FM + SSB
40 MEMORIES
£329**



**NEW SONY SW.1
MICRO-SW-RECEIVER
INC. ACTIVE
ANTENNA etc.
£249**

**ALL PRICES CORRECT AT
TIME OF GOING TO PRESS.
PLEASE PHONE FOR LATEST QUOTE**

MERLIN

**MERLIN WAY, BOWERHILL,
MELKSHAM, WILTSHIRE SN12 6TJ.**
Tel: 0225 706886.

SYSTEMS

Look out for Merlin Systems at the following rallies and exhibitions, RAFARS, at RAF Halton, Aylesbury, Bucks on June 18, the Longleat Rally on June 26, the NEC Exhibition on the 15, 16, 17 July and the Scarborough Amateur Radio Society Rally on 31 July. You may also call at the Warehouse but please ring first.

NEW SYSTEM

MERLIN SYSTEMS PC Turbo 256K Ram, 8088 CPU, 1 Diskdrive, Hires Mono Monitor, 34 Keyboard, Par printer port, Radio and MSdos software and Merlin Systems backup. **£450.00** + £15.00 P&P

COMPUTER DESK

Up Market desk L 102cm x W 74cm x H 74cm with keyboard recess and cableing trunking. **New only £50.00** + £16.00 P&P

POWER SUPPLIES AND TRANSFORMERS

Bench mains input PSU in a blue case with switched input and HT output 6.3vac lamp for valve heaters 250vdc HT stabilised. H 115m W 185mm D 125mm **£8.00.**

2nd USER SYSTEMS

BBC B with DFS one 40 track SS drive. **£250.00.** BBC+ 128K 1770 DFS, S way rom, one 40 track DS drive. **£350.00.** IOTEC IONA 64K CPM 2.2.2 40 track DS drives. **£160.00.** Apple II+ with one disk drive and software. **£150.00.** FRANKLIN ACE 1000 with disk drive and software this is a Apple compatible. **£150.00.** P&P £10.00.

COMPUTER PARTS

APPLE cards, S100 cards, PSUs, NEW 12 inch green screen composit input Hires open frame monitor, only needs 12 volts DC. **£30.00.** P&P £5.00

NEW

Made by well known Japanese manufacturer, twin cassette mechanism, complete with stereo heads, counter doors and leads only **£6.00** P&P £1.00. Complete working LW, MW, FM, stereo music center PCB (the cassette plugs in) only **£5.00** P&P £1.50

RADIAL ELECTROLYTICS

10 x 4.7uf 25v	30p	5 x 3300uf 25v	1.30
10 x 22uf 10v	30p	2 x 3400uf 40v	75p
10 x 22uf 25v	35p	MISCELLANEOUS	
10 x 4.7uf 25v	35p	1 x I.E.C. 1amp mains filter socket	1.25
10 x 4.7uf 35v	40p	1 x I.E.C. 3amp mains filter socket	1.50
5 x 4.7uf 250v	60p	1 x I.E.C. 6amp mains filter socket	1.75
10 x 100uf 10v	35p	5 x push latching pcb switches	70p
10 x 220uf 10v	35p	5 x slide pcb switches	70p
10 x 220uf 16v	40p	10 x phono plugs	50p
10 x 220uf 25v	40p	5 x 240v panel neons	70p
10 x 220uf 40v	45p	5 x 24v panel lamps	70p
10 x 220uf 50v	45p	5 x MES lamp holders	50p
10 x 470uf 25v	35p	5 x 2way 3pole switches with knobs	1.20
10 x 470uf 50v	50p	4 x 4way dill switches	30p
10 x 1000uf 25v	35p	5 x 1.7amp 200v bridge rectifiers	1.20
POWER ELECTROLYTICS		3 x 1amp 50v bridge rectifiers	50p
5 x 50uf - 50uf 200v	60p	10 x 5mm x 2mm red leds	1.00
2 x 220uf 315v	1.75	3 x 5mm x 2mm green leds	1.00
2 x 220uf 400v	2.00	MERLINS KIT PACKS	
2 x 470uf 200v	1.50	1 x mixed power capacitors	1.75
2 x 15000uf 25v	1.75	1 x mixed pf capacitors	1.50
2 x 22000uf 25v	2.00	1 x mixed axial electrolytics	1.50
		1 x mixed wire wound resistors	2.20

PAYMENT: Credit card, cheque, PO, cash. Post and Packing, up to £10.00 add £1.50, £10.00 to £20.00 add £1.00. Please add VAT to total.

LOSING DX?

ANTENNA FAULT? Poor reports? Not getting out? CHECK FAST with an **ANTENNA NOISE BRIDGE**, measure RESONANCE 1-160MHz and RADIATION RESISTANCE 2-1000 ohms, simply null the noise, **only £27.90**, get **ANSWERS** and **MORE DX.**

ANTENNA TUNER for outside or **INDOOR** antennas, end-fed **LONG WIRES** or dipoles, **BOOST DX** and reduce interference 100KHz-50MHz in 6 overlapping ranges, **IDEAL** for FRG7700 etc or 10W tx, **only £31.30**, hear **WEAK DX.**

V.L.F.? EXPLORE 10-150KHz, Receiver £28.20.

Each fun-to-build kit (ready-made to order) includes all parts, case, pre-wound coils, instructions, by-return postage (Europe same, Giro 21.923.4000) etc. and list of other kits.

CAMBRIDGE KITS

45 (PH) Old School Lane, Milton, Cambridge.

R.A.S. (Nottingham)

G6XBH
G1RAS
G8UUS

Radio Amateur Supplies
Tel: 0602 280267



Visit your Local Emporium

Large selection of New/Used Equipment on Show

AGENTS FOR:

F.D.K.
AZDEN
ICOM
YAESU
ALINCO
KEMPRO

ACCESSORIES:

Welz Range
Microwave Modules
Adonis Mics
Mutek Pre-Amps
Barenco Mast Supports
DRAE Products
BNOS Linears & P.S.U.'s

AGENTS FOR CELLNET AND VODAFONE RADIOS
AERIALS, Tonna, Halbar, New Diamond Range of Mobile Whips, Jaybeam
BRING YOUR S/H EQUIPMENT IN FOR SALE

JUST GIVE US A RING

Monday: CLOSED Tuesday-Saturday: 10.00am to 5.00pm

3 Farndon Green, Wollaton Park, Nottingham NG8 10U
Off Ring Rd., between A52 (Derby Road) & A609 (Ilkeston Road)

AKD

Unit 5
Parsons Green Estate
Boulton Road
Stevenage
Herts SG1 4QG



THE FILTER SPECIALISTS



MAIL ORDER DEPT.
Stock Items Normally
Despatched within 48 hours,
21 days latest.
TEL. 0438 351710

Coming Soon FOR THE DISCERNING HF OPERATOR



£79.95

WA3-S FEATURES:—

- ★ ALL PUSH BUTTON OPERATION
- ★ AUTO OR MANUAL FREQUENCY SCAN
- ★ 10 SECTION L.E.D. SCALE INDICATION
- ★ 5 L.E.D. BAND INDICATORS
- ★ PUSH BUTTON BAND SELECTION
- ★ BATTERY LOW INDICATOR
- ★ INTEGRAL BATTERY COMPARTMENT
- ★ EXTERNAL AERIAL

AKD ARE INTRODUCING TWO COMPLETELY
NEW WAVEMETERS

BOTH MODELS COVER THE RANGE
1.5 MHz TO 110 MHz AND ALLOW
TRANSMISSION FREQUENCIES UP TO THE
3rd HARMONIC TO BE MONITORED AND
ASSESSED, THUS ENSURING COMPLIANCE
WITH LICENSING REGULATIONS.



£54.95

WA3 FEATURES:—

- ★ 5 BAND SCALES
- ★ ROTARY BAND SELECTION
- ★ ROTARY TUNING
- ★ METERED SIGNAL STRENGTH DISPLAY
- ★ L.E.D. SCALE INDICATION
- ★ INTEGRAL BATTERY COMPARTMENT
- ★ EXTERNAL AERIAL

BOTH MODELS REQUIRE PP3 TYPE BATTERY (NOT SUPPLIED) AND COME COMPLETE WITH
FULL OPERATING INSTRUCTIONS. APPROX SIZE 150 x 50 x 65mm (NOT INC AERIAL)

WA1 WAVEMETER

£25.95



Our Waveabsorption meter for 2 Mtre transmitters meets licensing requirements range 120MHz to 450MHz, very sensitive, can also be used as field strength meter within its range. Requires PP3 type battery (not supplied).

HFC1 CONVERTER


£49.00



For the FRG 9600/965 our new HF Converter, connects to the aerial socket, and powered direct from the 8 Volt o/p of the FRG 9600. Tune from 100, 1MHz to 160MHz, gives tuning range of 100kHz to 60MHz, uses double balanced mixer, with low pass filter on input.
★ Can be supplied with BNC termination for other scanners ★

WA2 WAVEMETER

£25.95



Our Wave absorption meter for the 50 & 70 MHz Bands. Meets licensing requirements. Can also be used as field strength meter within its range. Requires PP3 battery (not supplied).

TV INTERFERENCE PROBLEMS??!

Are you having trouble receiving a watchable picture on your TV? If so, the cause may be aerialborne interference. For many years AKD has manufactured a low cost range of in-line interference suppression filters that are easily inserted into the aerial system to help reduce the effects of interference from local taxi radio, CB, amateur radio, airport radar, etc. Each filter is terminated in standard aerial co-ax plug and socket and requires no external power. Fitting could not be more simple. No technical knowledge is needed. There are 13 standard stocked filters in our range, but individual filters can be tuned to reject interference at specific frequencies if required. If you are not sure which filter type to order or have any questions regarding interference phone our helpline on 0438 351710 and ask for John who will be pleased to assist you in making the best choice of filter.

THE FILTER RANGE IS AS FOLLOWS:

FILTER TYPE RBF1

A range of filters designed to eliminate Radar Blip, especially noticeable on video recorders. Stocked on channel 36 and 846MHz (RAF Boulmer interference) can be tuned at our factory from 420MHz to 890MHz. **£6.95 each**

FILTER TYPE TNF2 (Suitable for UHF TV only)

A range of Tuned Notch filters stocked on generally useful frequencies used by Amateur Radio operators, CB users, Private Taxi companies. Can also be factory tuned to reject any spot frequency up to 300MHz. Now stocked at 50 & 70 MHz. **£7.95 each**

FILTER TYPE HPF1

Used in weaker reception areas for general interference problems. Use with UHF TV, Video & Pre-Amps **£6.95 each**

FILTER TYPE HPF5

Used in strong signal area for severe interference on UHF only **£7.50 each**

FILTER TYPE BB1

A general purpose filter that can be used on its own or together with other filters in our range for severe interference problems. Ideal at the input of VCR and Pre-Amps. **£6.95 each**

FILTER TYPE HPF6

NEW



£17.00 each


Yet another filter is added to the already comprehensive range of AKD filters. The HPF6 is a 6 section UHF high pass filter particularly useful for the rejection of any aerialborne interference below 450 MHz yet having minimal insertion loss on Bands 4 & 5 (UHF TV). It can be used with UHF TV, video recorders and should be sited before any aerial pre-amp. In common with all the other filters in the AKD range the HPF6 requires no external power and is simply fitted in line with the aerial co-ax with its standard terminations.

Technical Details:—

Pass Band:— Frequency range 470-895MHz
Stop Band:— (inner only) DC-450MHz typical >75db (at 300MHz >30db (at 435MHz)
Input & Output Impedance:— 75 ohms nominal
Case Material:— Aluminium
Case Size:— 122x40x25mm (excl socket, flylead & plug)
Terminations:— Standard Belling Lee type aerial co-ax plug and socket

Unifilter 'CLAMP-ON' RADIO-FREQUENCY CHOKE


PHONE OR SAE FOR PRODUCT SPECIFICATION & APPLICATION NOTES



Allows leads to be toroidally protected without the need to cut or remove plugs or connectors. Ideally suited for moulded plugs, leads, ribbon, and large diameter cables. Can easily be fitted and stacked in multiples to increase rejection. 'UNIFILTER' works by suppressing the interference currents that flow along the outside of cables without affecting the signals or power flowing inside. This means that you don't need to worry about upsetting normal operation or invalidating guarantees. Suitable for both reducing the emission of, or rejecting the effect of, 'common mode' interference as experienced on computer, hi-fi & speaker leads, as well as the normal mains & aerial cables.

UF 4 KIT (SUITABLE FOR SMALLER INSTALLATIONS) **£9.89**

UF 8 KIT (FOR MULTI INSTALLATIONS) **£19.55**



ALL PRODUCTS ARE AVAILABLE FROM US DIRECT
MAIL ORDER OR WHY NOT MAKE USE OF OUR ACCESS
& VISA FACILITIES TO ENSURE MINIMUM DELAY

ALL AKD PRODUCTS CARRY THE USUAL AKD 2 YEAR
GUARANTEE. PRICES QUOTED ARE CORRECT AT TIME
OF GOING TO PRESS AND INCLUDE VAT,
POSTAGE & PACKING

TRADE ENQUIRIES WELCOME
TRADE ORDERS CAN NOW BE PLACED BY
FAX ON 0438 357591

Props: RT & VEL Wagstaffe. Technical Adviser: John Armstrong



It's a Date

After reading your editorial in April *PW*, I am motivated to make you aware that expressing dates by figures, in the sequence of YEAR/MONTH/DATE, has been an International Standard since 1979! The accompanying extract of the relevant Standard, ISO 2014, explains the new system and the reasoning behind it.

I have used this way of expressing dates since 1980, and have extended the concept in many ways. For example, the filing of my correspondence, technical data, references and short-wave reception reports, and also indexing the contents of publications, to name just a few!

You will have noticed that the writing of dates in numerical form can also include expressing time, on a particular date. I do not use

Writing of calendar dates in all-numeric form

0 INTRODUCTION

In all forms of international traffic and exchange, dates must be clearly designated and able to be compared without any ambiguity.

This International Standard for writing of calendar dates in all-numeric form has been prepared to obviate the confusion arising from misinterpretation of the significance of the numerals in a date written with numerals only; it is considered that similar confusion does not arise when the month is spelled out, either in full or in abbreviated form.

The occasions on which an all-numeric date might be used have been examined and the advantages for these occasions of the descending order year-month-day have been found to outweigh those for the ascending order day-month-year, established in many parts of the world.

The advantages of this descending order include the following in particular:

- the ease with which the whole date may be treated as a single numeral for the purpose of filing and classification (for example for insurance or social security systems);
- arithmetic calculation, particularly in some computer uses;
- the possibility of continuing the order by adding digits for hour-minute-second.

division markings between each group of digits and have also dispensed with the figures "19" in front of the year. As soon as I see or read such a number I automatically, in my mind, "see" groups of two digits in the sequence: year-month-date-hour-minute-second. Time is always expressed in the 24-hour mode (there is no need to indicate a.m. or p.m.).

One of my hobbies is DX

short-wave listening and I write reception reports to some of the broadcasters, using the extended concept of expressing it in digital form.

Here is a typical example of what such a report looks like: BRT880410-2330/0000-11M695-45435-News-Music. In words I would have to write: "On the 10th April 1988, between 11.30 p.m. and midnight (UTC), I listened to

News and Music, on 11.695MHz, SINPO report 45435, Belgian Overseas Service (BRT)." You must agree that this is quite a mouthful.

My collection of technical data and circuit diagrams is indexed in a similar way, saving me much wasted time over the years. For example, the index entry "EA8604103" tells me I can find that particular article on page 103 of the April

1978-09-12

For Americans,
12-9-1978 = December 9, 1978
For Europeans,
12-9-1978 = 12 September 1978

Why? Because there was no international agreement on the writing of dates. Whenever the month is spelled out, there is no problem: 12 September = September 12, but a date written in numerical form can lead to confusion.

There is a way to dispel this confusion. ISO has developed an *International Standard* (ISO 2014) establishing a logical descending numerical order:

YEAR	MONTH	DAY
1978	09	12

This means 12 September 1978 the world over.

To date, ISO has published 3600 International Standards all of which have the same goal: better communication, better understanding between people of all nations.



Case postale 56
CH-1211 Genève 20
Switzerland
Phone (022) 34 12 40
September 1978
(français
au verso)

PW COMMENT

New Blood

SCANNING THROUGH THE MOUNTAINS OF MAGAZINES which regularly arrive in the *PW* editorial offices from all parts of the globe, two unusual items caught my eye. Neither of them directly related to amateur radio, but they give food for thought as the RSGB and others try to encourage new recruits into the hobby.

Rumour has it that details of the new "Student" licence proposals will be announced at the RSGB's 75th Anniversary National Convention at the NEC, a few days after this magazine hits the bookstalls. It will be interesting to see just what form of licence is in mind, and whether the existing (often criticised) UK lower age limit of 14 years for an amateur licence will apply.

According to a report recently produced by CACI Market Analysis of London, mentioned in the April/May issue of *Marketing News*, a decline in the number of 10 to 14-year-olds in Great Britain has taken place over the period 1981-86. Overall, the decline was 17.9 per cent, but in some areas it was much greater. Towns such as Falmouth, Chippenham, Harlow, Chesham, Wilmslow, Ilkley, Richmond (Yorks), Redcar, Newton Aycliffe and Corby have all seen a decline of over 25 per cent. The decline becomes even more apparent in some inner city areas of London, Salford, Glasgow and Liverpool, where there was a fall of between 30-35 per cent.

That age-group is now just the one which we should be trying to interest in amateur radio—or ought we to be looking at an even earlier age? Should there be a lower age limit at

all—other countries seem to manage well enough without one. Look at the situation in the computing field, where agile young minds are getting to grips with programming when it seems they've only just left infant school.

That brings me to the other news item I saw, this time in the Australian magazine *Amateur Radio Action*. Apparently a university researcher in Israel, specialising in the study of mental development of young children, has conducted studies of three-year-olds implying that attempts to use computers may be raising their anxiety levels.

He concludes that the computer is threatening to youngsters under age four. "They are unfamiliar with it," he says, "unlike a TV, which they can operate with the press of one button." Among four, five and six-year-olds, the anxiety disappeared and their attitudes to computers were reflected in the degree of success they had in using them.

Though it perhaps requires different attitudes to technology to operate a radio and a computer, surely we should be trying to capture the imagination of youngsters in that same age range. By the age of 10, many have already settled on an absorbing hobby and it then becomes more difficult to tempt them away into amateur radio.

If it is felt that we must retain a lower age limit to an amateur licence, maybe eight years old would be a suitable level. Obviously there will be some very immature eight-year-olds who should never be allowed near a radio transmitter, but then the same applies to some people into middle age and beyond!

Geoff Arnold

1986 issue of *Electronics Australia*.

I am naturally delighted that the IARU has seen the light and recommends to all amateurs that they should use the convention of expressing dates on QSL cards in digital form.

**Eric Barber
Orewa, New Zealand.**

One of the delights of an Editor's job is the opportunity to ride a particular hobby-horse in print from time to time. Sometimes, though, the neck is stuck out just a little too far, and the head is very smartly chopped off!

Having read Mr Barber's letter and the extract from ISO 2014, I have to admit that the reasoning behind the new system is so delightfully logical that I totally withdraw the rude comments I made about it in our April issue!

In fact, the new system is really an extension of the "Date Time Group" (DTG) system used in Naval (and no doubt in other armed services) communications for many years. There, for example, the group 132245Z at the end of a message would mean that it was originated on the 13th of the month at 2245 hours GMT (UTC). The letter "Z" identifies the time zone centred on the Greenwich Meridian (0° Longitude).—Ed.

Junk Radio

I found the letter from I. R. Willson of Epsom (*PW* April, 1988) very interesting. It took me back many years, to the days of "real" radio.

As an "Old-timer" who once embarked on one of these projects, I can say that sets could be made from junk, and they worked, too, if one got the values right. Apart from valves and headphones, everything can be made, even a crystal. The two main ingredients are plenty of patience and time, the whole thing is trial and error from start to finish.

I am not sure what the bent spoon was for, except perhaps a crude Morse key, and it is not possible to get the completed set into a bully-beef tin. Components made in this way take up far more room than conventional ones, and a "baseboard" about 250 x 400mm (10 x 16in) is required to mount them on.

A crystal set is the easiest to make, as very few components are required. It is best to have the correct crystal, but other materials will work. I well remember using a piece of cube sugar with quite good results. The

coil can be wound on any sort of former—try the inside of a kitchen roll, a small jam-jar or pvc waste-pipe.

Most of the fixed capacitors will be of small value, and can be made by twisting two lengths of insulated wire together. Variable capacitors can be made with two pieces of thin plywood with foil stuck to one side of each, arranged with some form of insulation between them. The capacitance is varied by sliding one piece over the other, to vary the area of overlap.

For resistors, try rubbing a lead (graphite) pencil along a thin piece of wood, and clip a wire to each end. The more lead used over a given length, the lower the value. For values up to about 30Ω, a length of electric fire element spiral or a pencil can be used, 185mm of HB

pencil lead is about 20Ω!


A valved project requires much more experimenting to get the values of resistors and capacitors correct. There is also the problem of power supplies. It is better, for safety reasons, to use batteries rather than a mains power pack—you can offset the cost of batteries against the fact that the set is "free". There is no need to use valve-holders. Solder copper wire tails to the pins, cover the wire and pins with sleeving, and mount the valve on its side on the baseboard. Most triode valves will oscillate with an h.t. voltage of 45 to 60V.

These are just a few suggestions, no doubt other readers can come up with better ideas. Good luck to all those who are willing to have a go.

**G. W. Millmore
Wootton, Isle of Wight**

Send your letter to the Editorial Offices in Poole, the address is on our Contents page. Writer of the Star Letter each month will receive a voucher worth £10, to spend on items from our PCB or Book Services, or on *PW* back numbers, binders, reprints or computer program cassettes. And there's a £5 voucher for every other letter published.

Letters must be original, and not duplicated to other magazines. We reserve the right to edit or shorten any letter. Brief letters may be filed via our Prestel Mailbox number 202671191. The views expressed in letters are not necessarily those of *Practical Wireless*.



Waiting

Permit me to have a last word on the subject of Novice/Student Licences. For various reasons there are many people like myself who have to be content to be listeners only. Contrary to expert opinion, I believe the current Radio Amateurs Examination is far from basic in its questionnaire. Those would-be radio technicians and semi-professional users might argue that $f=1/2\pi\sqrt{LC}$ and a knowledge thereof is an essential requirement for granting of a "B" Licence. This is not so; it is possible to amass a great amount of expertise through practical and experimental interest and discarding the academic jargon and theory.

I speak as an ex-RAF Wireless and Radar Operator, undergoing a two-year course with the subsequent trade tests which in no way reflected the necessity as in the RAE to test one in physics theory

and mathematical equations. To become a senior wireless operator I passed the 23 w.p.m. Morse tests, putting me on a par with those wizards in the Merchant Marine and the Royal Navy.

Alas, all the foregoing does not give me an automatic right to an exam-free licence. But, you might ask, why not brush up one's knowledge by joining a non-vocational course in amateur radio at the local colleges or night classes? The answer is simple—in the whole of the City of Nottingham or locally, there aren't any. No shortage of courses in flower-arranging, yoga, etc.!

And so, until a Novice Licence becomes a reality, I'll remain content to stay in the background under my massive antenna array, with the sure knowledge that my Ohm's law, basic electrical knowledge and practicality will keep me interested in amateur radio.

**L. Hawkings
Bingham, Nottingham**

I'm sure yours won't be the last word on the Novice/Student Licence topic by a long way, Mr Hawkings! Speaking as someone who first learned his radio theory and his Morse almost 40 years ago, before going to sea in the Merchant Marine, I must tread carefully here.

Surely the principle of resonance in a tuned circuit is the lynch-pin of radio communication. If it did not exist, we would not have progressed from the era of spark transmitters and coherer receivers, with just a single channel of Morse communication available in each area of the world.

If you accept that Ohm's law is an essential part of basic electrical knowledge, why jib at $f=1/2\pi\sqrt{LC}$? Why let a square-root sign stand between you and an understanding of how a radio receiver can be made to respond to just one of the many thousands of signals presented to it by the antenna system?—Ed.



Rally Calendar

* PW/SWM in attendance

***July 15-17:** The RSGB 75th Anniversary National Convention will take place at the National Exhibition Centre, Birmingham. HRH Prince Philip, Duke of Edinburgh, will perform the official opening.

***July 24:** The Cornish Radio Amateur Club are holding their rally at the new venue of the Village Hall, Perranwell. This is about 8km south-west of Truro.

July 24: The Burnham Beeches, Maidenhead and Chiltern ARC will be holding the 6th McMichael Rally at Haymill Centre, Burnham, near Slough, Doors open at 10.30am, 10.15am for the disabled. All the usual attractions will be there and the car boot sale will again be held. More details from: **Bob Hearn GOBTY. 70 Herbert Road, High Wycombe, Bucks.**

July 28-31: The AMSAT-UK Colloquium will again be held in the University of

Surrey, Guildford. More from: **G3AAJ. Tel: 01-989 6741.**

July 30: The Hilderstone Radio Society are holding their mobile rally and convention at Hilderstone College, St Peters Road, Broadstairs, Kent. There will be trade stands, a bring and buy, talk-in station, a special event station, raffle, refreshments and a lecture programme. **Alan. Tel: 0843 593072.**

***July 31:** The Scarborough ARS Rally will be held at The Spa, Scarborough. Doors open at 11am. Talk-in will be on S22 and SU8 as well as GB3NY. More details from: **Ian Hunter G4UQP. QTHR. Tel: 0723 376847.**

***August 14:** The Flight Refuelling ARS and the Bournemouth RAIBC Rally will be held at the FRARS Sports & Social Club, Merley, Nr Wimborne, Dorset. All the usual attractions will be there for all the family. Entrance is 50p (children free). Gates open from 10am to 5pm. More details from: **John Fell. Tel: 0202 691649.**

August 14: The 1988

Derby Mobile Rally will take place at the usual venue of Lower Bemrose School, St Albans Road, Derby. Doors open at 11am. More details from: **G3KQT. QTHR.**

August 21: The Newbury District ARS will be holding a radio car boot sale at The Acland Hall and Recreation Ground, Cold Ash, Newbury. It opens at 10am. Pitches are £5 or £4 if pre-booked and there is a limited supply of inside tables at £10. Please contact: **Mike Fereday G3VOW. Tel: 0635 43048.**

August 28: The Annual Rally of the British Amateur Radio Teleprinter Group (BARTG) will again take place at Sandown Park Racecourse, Portsmouth Road, Esher. More details from: **Peter Nicol G8VXY. Tel: 021-453 2676.**

August 28: The Galashiels & District ARS are holding their Open Day at the Focus Centre, Livingstone Place, Galashiels. There will be trade stands, a bring and buy as well as catering facilities. More from: **John Campbell G0OAMB. Tel: 0835 22686.**

Broadcasts in Band I & Band III

The Government has decided not to introduce broadcast services into Bands I and III. In a written answer, Lord Young, Secretary of State for Trade and Industry, stated: "The technical feasibility study has shown that there is insufficient scope within Band III to accommodate a broadcast channel without the risk of serious mutual interference with adjacent mobile services. In Band I, there is potential scope for a single broadcast channel covering at most some, but not all, major conurbations. But even this restricted coverage could not be achieved unless a number of existing mobile radio services were to be moved at very substantial expense.

"Additionally, the re-introduction of high power broadcasting in this band could be very difficult and costly to negotiate with our international neighbouring administrations, who would regard a policy reversal by the UK as a serious disruption of the international understandings on which their domestic planning over the past few years has been based.

"Band I also suffers from a seasonal pattern of interference, known as Sporadic-E, whereby broadcasts from 1000km or further away can be reflected from the ionosphere, completely obliterating the wanted signals for prolonged periods. Finally, the Civil Aviation Authority have advised us that the re-introduction of broadcasting could pose some threat of harmonic interference to aircraft navigational and communications systems.

"With so many actual or potential disadvantages in return for, at best, an extremely restricted coverage, we have concluded that the re-introduction of broadcasting into Bands I and III is not a viable option and that it is in the interests of all concerned to make that conclusion public at the earliest possible date."

The LBO-1020 Oscilloscope

Thandar Electronics have announced the introduction of the Leader LBO-1020 20MHz dual-trace oscilloscope.

It is a 5mV/div, 20MHz (500µV/div 4MHz), portable dual-trace oscilloscope with a maximum sweep speed of 50ns/div (mag x10) and 150mm c.r.t. with internal graticule.

The major features include an illuminated graticule and a special trigger pick-off circuit which ensures synchronisation with composite video signals. Alternate trigger mode allows the stable display of two asynchronous signals plus display modes for CH-1, CH-2, ALT, ADD and Polarity CH-2 INVERT plus X-Y operations.

The LBO-1020 is supplied complete with probes, priced £315 plus VAT. For more details, contact: **Thandar Electronics Ltd., London Road, St Ives, Huntingdon, Cambs. PE17 4HJ.**

Bridge Megger

Megger Instruments Ltd. has launched its latest generation 18B/BR7 model.


The 18B/BR7 Bridge Megger tester combines high level functionality with modern styling and cost savings. It locates earth, contact or open circuit faults using bridge techniques on telecommunications networks, as well as general insulation and circuit resistance testing on cables.

With insulation resistance ranges of 500V and 95V, the 18B/BR7 has a signal meter for readings, which

also acts as a bridge galvanometer when four rheostat switches are adjusted—the bridge reading being given on switch dials.

The unit combines the functions of insulation tester, resistance bridge with a 0.1Ω resolution and cable fault locator capable of pin-pointing open circuit, resistive and short circuit faults. The unit weighs 4.2kg including a rugged plastics case with carrying handle.

Megger Instruments Ltd., Archcliffe road, Dover, Kent CT17 9EN.

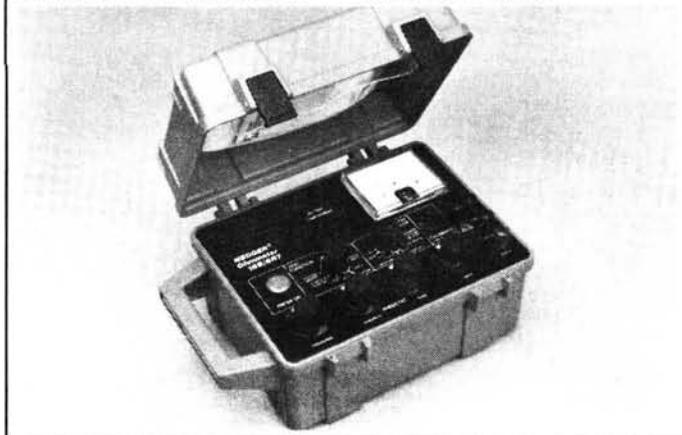

REALISTIC®

PROGRAMMABLE SCANNING RECEIVERS



THE BEST CHOICE FOR YOUR HOME OR CAR

A Realistic PRO-2004. The ultimate in today's solid-state high-technology scanners! Delivers a wide range of frequencies not found on most scanners. Search mode finds new channels, selectable scan and search speeds, two-second scan delay. Lock-out key for temporarily bypassing channels. Squelch control and priority function. Continues tuning from 25-520 MHz and 760-1300 MHz. 300 channels for storing frequencies. Large LCD channel/frequency display with electroluminescent back lighting, built-in speaker, telescoping aerial. Jacks for external aerial, headphone, external speaker, tape record and DC power supply. Measures: $2\frac{3}{16} \times 10\frac{1}{16} \times 8\frac{1}{16}$ ". Mains operation (or 13.8 VDC neg. gnd. power cord, extra). Memory back-up requires 9v battery. **20-9119 £349.95**

B Realistic PRO-2021. Features direct keyboard entry, search and scan in two speeds and two-second scan delay. Priority function will automatically switch to the priority channel when a call is received on it and individual lock-outs for temporarily bypassing channels. Scan up to 200 channels in these bands: VHF Lo 68-88 MHz, VHF AIR 108-136 Mhz, VHF Hi 138-174 MHz, UHF Lo 380-470 MHz and UHF Hi 470-512 MHz. Easy-to-read LCD channel/frequency display with electroluminescent back-lighting, squelch control and built-in speaker, telescoping aerial. Jacks for external speaker, external aerial, tape recorder and DC power supply. Size: $3\frac{1}{8} \times 10\frac{1}{4} \times 8$ ". Includes mounting bracket for mobile use and DC power cord. Mains operation (or 13.8 VDC neg. gnd.). Memory back-up requires 9v battery. **20-9113 £219.95**

Tandy®

**Over 400 Stores And
Dealers Nationwide**


Prices may vary at Dealers. Offers subject to availability.

Tandy, Tandy Centre, Leamore Lane, Bloxwich, Walsall, West Midlands. WS2 7PS

Digital Storage Scope

Fieldtech Heathrow Ltd have announced the arrival of the Intron DSO-2020A digital storage scope.

Each channel has its own a-d converter with a maximum sampling speed of 20 million samples per second. The trigger level markers superimposed on either side of the digital image provide exact indication of the trigger level selected. Because of the complete trigger facilities such as: Normal, Auto, TV Line, TV Frame, HF Rej and Ext., which also work in storage mode, complex signals such as a TV test

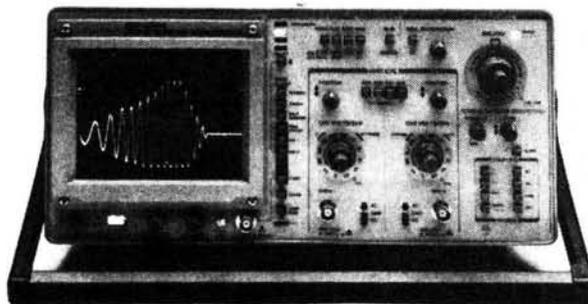

signal can be recorded with automatic line/frame selection depending on the timebase range.

For more details on what the DSO-2020A can do,

contact:

**Fieldtech Heathrow Ltd.,
Huntavia House,
420 Bath Road,
Longford,
Middx. UB7 0LL.**

Icom IC-32E

Icom have a new dual-band hand-held transceiver called the IC-32E. It has full duplex capability, you can really transmit on one band and receive on the other simultaneously.

There are twenty memories, but each of these can store two frequencies, presumably one on each band. The Programmed Scan function scans all frequencies between two programmable edge frequencies. The Memory



Scan function scans all the memory channels in succession, except those you have locked out, or it will scan just the 430MHz memories or the 144MHz memories.

There is a Monitor switch which provides a "listen on the input" facility. There is also a Priority Watch, this will monitor the calling channel, a memory channel or all memory channels in succession every five seconds. This happens whilst you are listening elsewhere on the bands.

For the full details of all the facilities available on this hand-held, contact:
**Icom (UK) Ltd.,
Sea Street,
Herne Bay,
Kent CT6 8LD.**

Special Events Station

GB75TV: The Rugby TV Repeater Group is planning a special event station over the August Bank Holiday weekend (August 27/28). The station will be operating ATV on at least 430 and 1296MHz from Sheenington, near Banbury in Oxfordshire. The hours will be from 12 noon to 8pm on the Saturday, and from 7am to 12 noon on the Sunday.

G6IQM

QTHR

GBONKG: This station will be on the air from 10am on July 17 from Littleton Road Playing Fields, Salford, Lancs.

The Salford Recreation Department are having a family funday and the Northern Kite Group will be taking part. They have CAA clearance to fly up to

1000ft. They will be running a 1000ft wire antenna for the station as well as 144MHz using a 200ft antenna. All QSOs will be acknowledged with a special QSL card.

GB75YMD: This station will be on the air from Dover Castle on July 2. It's for a youth rally being held then. They will be operating on h.f. and 144MHz s.s.b. The callsign stands for "Young Men of Dover" as the station is being run by the South East Kent (YMCA) ARC.

GB2RNL: On July 28-31, a special event station will run for the benefit of the Royal National Lifeboat Institution. They will be on the air from the headquarters in Poole (in the depot complex) to coincide with the RNLI open days which are the 29th and 30th. On those two days the HQ will be open from 10am to 6pm to the public. A QSL card will be produced for this event, but can only be

supplied on receipt of an s.a.e. or for overseas amateurs the requisite number of IRCs. Don't forget the RNLI is dependent upon donations so costs must be kept to a minimum.

The frequencies they will be using are:
3.750, 7.050, 14.250,
21.250 & 28.500MHz ('phone).
3.550, 7.025, 14.075,
21.075 & 28.075MHz (c.w.).

Of course, that's \pm QRM.

As the RNLI is funded by donations only, if you would like to send them something to help out, they will be more than happy to accept. The donations-only address is: **GB2RNL. Peter Holness, RNLI HQ, West Quay Road, Poole, Dorset.** The address to send your envelopes for QSL cards is: **GB2RNL. Malcolm A Williamson GOEGA, 21 King Alfred Avenue, Bellingham, London SE6 3HT.**

RSGB 75 Award

To celebrate the 75th Anniversary of the Radio Society of Great Britain, the Society has decided to introduce the RSGB 75 Award. To qualify for the award, stations must achieve the following:

UK Amateurs and s.w.l.s

One contact with any of the following stations:

GB75RS (throughout the year)

GB75HQ (July 1988)

GB75AC (9-17 July 1988)

GB75ER (9-17 July 1988)

or 10 other GB75 calls PLUS contacts with a total of 75 different RSGB members.

Overseas Amateurs and s.w.l.s

A total of 75 points made up from the following:

GB75RS (10 points)

GB75HQ (15 points)

GB75AC (15 points)

GB75ER (15 points)

Other GB75 calls (5 points)

RSGB members (1 point).

Contacts may be made on any band using any mode, including satellites, but must NOT include any duplicate contacts or contacts via repeaters. All contacts must take place between 1 January 1988 and 31 December 1988. Short wave listeners, in both categories, will be able to apply for the award on a "stations heard" basis.

Claims must be postmarked no later than 1 April 1989 and be accompanied by a cheque or postal order for £1.50 made payable to RSGB to cover postage and packing. Ten IRCs are required for overseas applicants.

When you have the required number of contacts or points, you should send a certified log entry (QSL cards not required) to:

**Mr John Harvey G4IV,
RSGB 75 Award Manager,
38 Bodenham Road,
Northfield,
Birmingham B31 5DS.**

Oops!

In the June issue of Practical Wireless, we inadvertently printed the wrong telephone number in the RST Valves advertisement. The correct number is:

Tel: 01-684 1166 FAX: 01-684 3056. Many apologies to all concerned.

I/O Interface

The 2308 I/O Interface from Black Star is a microprocessor-controlled general purpose measurement and control instrument. It is easily connected to any personal computer having an RS232 port.

It is controlled by a simple command structure in ASCII string format, enabling the user to use almost any programming language on the controlling computer. An instruction manual is provided together with a demonstration floppy disk containing program listing in BASIC.

The 2308 is a versatile instrument with a wide range of useful functions and features including: eight-channel ± 12 bit analogue input, four-channel 12-bit analogue output, eight opto-coupled digital inputs, eight mains rated relays and eight-channel non-volatile data



logging memory.

Among the applications for the unit are data acquisition, data logging, automatic testing, computer education, laboratory automation, robotics and industrial control. The unit

costs £299 plus VAT, and more details are available from:

Black Star Ltd.,
4 Harding Way,
St. Ives,
Huntingdon,
Cambs. PE17 4WR.

Microflame Super Cub

The Microflame Super Cub burns with the same clean, blue flame as a full-size butane blowtorch. Despite its small size, it can still deliver 1300°C. That should be hot enough to soft-solder 12.5mm copper plumbing, but sufficiently precise to silver-solder small items.

There should be no trouble fitting the Super Cub into any tool kit, complete with a refill. The 25g high capacity, low pressure disposable cylinder should burn for two hours.

The Super Cub and one 25g butane canister costs £9.95 including VAT, replacement butane canisters cost £1.65.

Microflame Ltd.,
Vinces Road,
Diss,
Norfolk IP22 3HQ.
Tel: 0379 644813.

Thanet Electronics Club

The Thanet Electronics Club meets every Monday evening at 7.30pm in the Quarter Deck Centre, Zion Place, Margate.

They provide lots of other fun activities for "kids", like visits and Youth Hostel Trips. There are

opportunities for lots of real interest in science, model and project making and history of science as well as talks and article writing.

If you are in the area and think this group for youngsters is interesting, contact:

Richard on Thanet 61821
or
Chris on Thanet 221131.

SILVAR

The Stevenage & District ARS are putting on a display of radio and electronics for the nine secondary schools in Stevenage. The combined school rolls amount to more than 7500 students. The display will take place at the John Henry Newman school on July 20-22.

The Stevenage Information Technology Centre is joining them in this project, the purpose of which is to interest students in a career in radio/electronics via a knowledge of, and an interest in, amateur radio.

They will be putting on a 75 minute talk/display and demo on amateur radio, using the RSGB New Student Publicity packs. This will be followed by a 30 minute talk/display by SITEC on vocational training and

career entry, with handout fact sheets on the new Student Licence, r.f. propagation, club membership, etc.

The event is scheduled to run from 9.30am to 3.30pm for students and from 6.30pm until 9pm for teachers and members of the public, by invitation.

If this year's venture is a success they hope to repeat it in subsequent years from different school sites each year.

The title of the event SILVAR stands for Student Link via Amateur Radio. They will be using the callsign GB75JHN, so if you hear them on the band and can answer them, remember it's in a good cause.

Offers of help, material, equipment, manpower or suggestions to:

Peter GOGTE
Tel: 0438 724991

BATC Contests

IARU ATV (International): September 10/11. 1800 Saturday to 1200 Sunday (UTC). f.s.t.v. all bands.

Slow Scan TV Autumn Vision Combined: November 13. 0001 to 2359 local time. Slow scan, f.s.t.v. all bands.

Winter ATV Joint European: December 10/11. Saturday 1800 to Sunday 1200 (UTC). f.s.t.v. all bands.

There are some changes in the contests planned for next year (1989) due to an agreement reached with neighbouring societies in Europe. It has been agreed that there will be four joint

contests through the year. One of these contests will be the International, which from now on will be an official IARU contest. This contest will be run each year by a different member country. The BATC will be organising the 1989 contest on behalf of the RSGB.

The advantage of running contests at the same time is that, conditions permitting, contacts into Europe may take place as everyone will be QRV at the same time. For more details on the British Amateur Television Club contests, contact:

Mike Wooding,
5 Ware Orchard,
Nr Rugby,
Warks. CV23 8UF.

Rally & Convention

The Hilderstone Radio Society are holding a rally and convention at Hilderstone College on July 30.

The lecture timetable is:
2.00pm Derek Bradford G3LCK on "Youth into Amateur Radio, What Can We Do"
2.30pm Dr. Ken Smith G3JIX on "Simple Test Equipment in the Shack"
3.00pm A symposium by a number of young members

of the Thanet Electronics Club for Youth on topics including: "The History of Morse", "Where Your Wave Came From", "The Advent of Telephony", "Can Kids Foxhunt & Build Oscilloscopes?"
3.45pm Ian Keyser G3ROO on "Simple Receivers, DC and Others".

In addition to the lecture programme there are all the usual events to be found at the rally.

For more details, contact:
Alan on 0843 593072 or
Ron 0304 812723

More Special Event Stations

GB751BH: Between July 23 and 31, the Wigan-Douglas Valley Amateur Radio Society will be operating a special event station to celebrate a week-long international Scout Camp at Bispham Hall Scout Estate, Billinge, near Wigan. Approximately 1500 Scouts from around the world will be participating. They hope to be using most bands including 50MHz. For further details, contact **Colin G6AHF. Tel: 0942 715851.**

GB2NTS: This is to

commemorate the 200th anniversary of the death of Prince Charles Edward Stuart, the callsign stands for National Trust Scotland. They will be on the air on August 20 and 21 from Culzean Castle, 19km south of Ayr. **Paddy GM3MTH, QTHR.**


GB2WVR: This is for the World Veteran Rowing Championships, Strathclyde Country Park, Motherwell between September 5 and 11. **Brian GMOEG1, QTHR** or **Paddy GM3MTH, QTHR.**

The Royal 1300

This antenna is a 25-1300MHz discone, manufactured in the UK. It is made of stainless steel and chrome plated brass machined components with UR67/RG213U coaxial cable and Greenpar "N" connectors.

The price for this antenna is £59.95 including VAT and is available from Raycomm Communication Systems Ltd. Further details are available from:

Raycomm Communication Systems Ltd.
International House,
963 Wolverhampton Road,
Oldbury,
Warley,
West Midlands B69 4RJ.

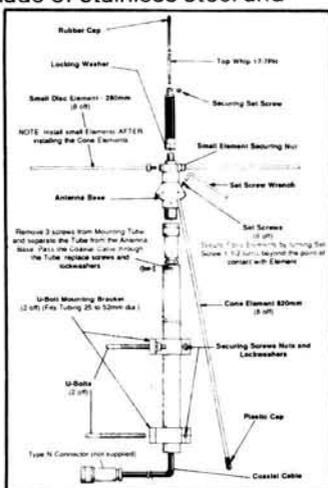

144MHz Barking Contest

Date: August 14.
Time: 1300-1700GMT
Sections: (a) high power—full legal limit, (b) low power—20W p.e.p. output or equivalent, (c) s.w.l.
Exchange: Contestants will exchange report—RS(T), a serial number commencing at 001 and the county in which the station is located. The RSGB county codes may be used. Where contacts are made with stations outside the UK, the locator square of the station worked should be received.
Scoring: Each completed contact will score 1 point, contacts with G3XBF or G8XBF count 10 points. The final total is the number of contact points multiplied by the number of counties and overseas locator squares.
Awards: A certificate will be awarded to the winner and runner-up in each section. The committee may decide to issue additional certificates if the number of entries justifies the situation. In addition a certificate will be awarded to the leading station in Essex in each section.

Duplicates: Unmarked duplicates will be deducted at double the claimed points. More than five unmarked duplicates may result in disqualification.
General: Contestants attention is drawn to RSGB v.h.f. rules 7, 12 and 15-21 which will apply in this contest.
Logs: RSGB logs sheets would be preferred, but any neatly produced log will be accepted. All entries should be accompanied by a check list of the counties/squares claimed for multipliers. Short wave listeners should ensure that callsigns in the station worked column only appear once in every five contacts. Each entry should be accompanied by an RSGB cover sheet 427 or similar summary.
Posting: All entries must be postmarked before August 30. The address is: BRS31976, 32 Wellington Road, Rayleigh, Essex SS6 8EZ. **This is not the address in the callbook.**
Disputes: The ruling of the committee of the Barking Radio & Electronics Society shall be final.

The Morse Coach

Smartek are a Cornish firm who are specialising in amateur radio and electronics. The Morse Coach is a complete "hi-tec" training package, designed to actively teach Morse.

It is a battery/mains pocket portable unit with internal loudspeaker and earphone. It has a synthesised speech system and has 18 separate learning sections, most with subdivisions and revision. It has speed and delay controls, a practice oscillator and an automatic key reader (with single character facility) giving spoken answers.

The "test" facility sends 36 x 5 letters or 10 x 5 numbers at fixed test speed, followed by the corresponding spoken answers. Similarly the reader has more than sufficient


memory to take a full "sending test" before replay.

The full package includes the Morse Coach, NiCads, charger, mains adaptor, earphone, a comprehensive instruction booklet and an Altai high speed type TK3 Morse key.

It costs £150 to buy or £5 per week to rent. A hire/buy refund is also available. On the rental side a deposit of £40 is required plus £5 for p&p both ways. The return is by Post Office pre-paid parcel service. Customers with their own key, charger, etc., may request these to be omitted for the appropriate price reductions.

For more details, contact:

Smartek,
Mistletoe Cottage,
Herdsfoot,
Liskeard,
Cornwall PL14 4QX.
Tel: 0579 20313.

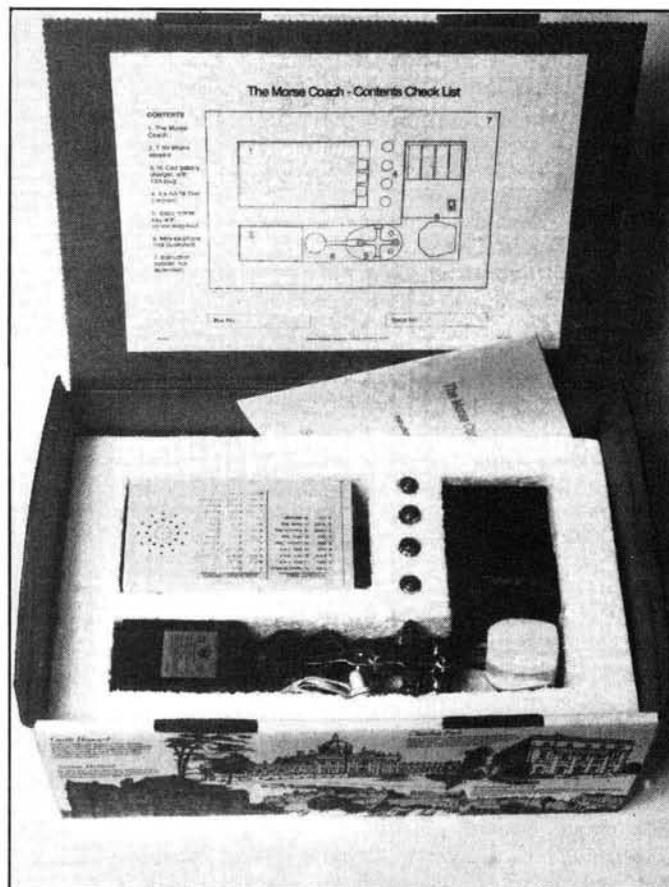

PW REVIEW

The FT-212RH represents the latest development in 144MHz mobile/base station rigs from Yaesu. Mike Richards G4WNC checks the on-air performance while Geoff Arnold G3GSR puts it through its paces in the lab.

The FT-212RH is a very compact 144MHz mobile transceiver with a host of features including 45 watts r.f. output! Probably one of the most revolutionary optional features is the Digital Voice System which allows digital recording and playback, but more of that later.

Getting Started

As the FT-212RH has been designed primarily as a mobile rig, connecting-up was quite simple. Readers will be delighted to hear that a mobile mounting bracket is supplied as standard. This bracket is quite well designed and consists of a simple "U" bracket with a spring clip on one side. When fitting the FT-212RH into this bracket the lefthand side is inserted first then the set is swung-up to engage in the spring clip. The great beauty of this simple arrangement is that the FT-212RH can be removed very quickly for use as a base station or just to prevent theft.

The antenna connection comprised a 50Ω SO-239 socket which was mounted on the end of a short length of cable. This seems to be standard practice for in-car installations and I must admit it does make connecting-up under the dashboard somewhat easier. The power connections were also very simple with a short "pigtail" cable at the rear of the FT-212RH which connected to a 2.8m power cable fitted with 15 amp fuses in each leg. One point to remember is that the FT-212RH consumes some 10 amps when transmitting at full power so you will have to make sure your power source can handle this. Well worth remembering if you go out mobile onto hilltops and stay parked without the engine running for long periods.

The only other connection required was the microphone which, on the review model, was the MH-14 standard hand microphone. I think it's about time that manufacturers started supplying headsets or boom microphones with all mobile rigs, as I'm sure hand microphones can encourage bad driving and operating habits.

Although the internal speaker was quite adequate, those of you who like



to use an external speaker have been catered for with the provision of the standard 3.5mm speaker jack on the rear panel. As usual, when a plug is inserted in this jack, the internal speaker is automatically cut off.

Although the FT-212RH is a very simple rig to operate, a read of the manual is essential before you start to operate in earnest. The supplied manual comprised a well indexed, 40-page, A5 book covering the operation in great detail. One of the first sections dealt with the installation and covered all aspects including base station packet radio operation and the fitting of the optional extras. This was followed by a detailed description of all the facilities and how to make best use of them. The Digital Voice System demanded an eight page section of its own to cover the many features available.

There was also a small, but nevertheless useful, section to get you out of difficulty should the FT-212RH fail to behave as expected.

In addition to the manual there was a double sided, A3 sheet and two A4 sheets containing full circuit diagrams and a block diagram. The diagrams were remarkable clear and much better quality than a lot of others.

One final extra with the manual was two A4 sheets containing quick reference charts. These charts summarised the functions of all the controls and the corresponding display. This proved to be very useful once the basic operation had been mastered.

The Front Panel

With any mobile transceiver it is very important to have a good front panel layout and the FT-212RH scores well here. The first thing you notice is the excellent illumination. Each of the buttons and knobs on the front panel had a small translucent border which

allowed the back-lighting to penetrate and create a glow around each control. The only controls excluded were the low power switch and the main on/off switch which seemed rather strange. The brightness of the panel illumination was dependent on the level of ambient light and was actually switched between two preset levels by a small sensor on the front panel. The illumination was very good indeed with the controls very easy to identify even in total darkness.

The frequency readout occupied the central position on the front panel and comprised a large liquid crystal display. The back-lighting system used was particularly effective and the display was always very easy to read. Yaesu have obviously put considerable thought into the layout of the display, as it managed to successfully convey the status of all the features of the FT-212RH without becoming confusing. One of the key features which made the display clear was the use of "inverted text", i.e. white on black as opposed to the more normal black on white. This inverted text was used for all warning messages and certainly made them stand out well. In addition to the messages and frequency indications there was a bargraph display used to indicate the power output on transmit and the signal strength whilst receiving.

There were three rotary controls on the front panel and these were used for; volume, squelch and tuning. The tuning control was actually a 24-position switch which controlled other features of the FT-212RH in addition to the basic tuning.

The majority of the FT-212RH's features were controlled by eight buttons on the lefthand side of the front panel. Most of these buttons have secondary functions which were accessed by pressing the F-WRITE first.

The display was a great help here as it clearly showed the warning message FUNC when the secondary function were active.

The only other item on the front panel was the microphone socket which comprised a standard eight-pin unit.

Musical Beeps!

The FT-212RH was equipped with a rather unusual audio indication system which used musical notes to represent each push-button. The sequence used gives a single low frequency "beep" when the top left button is pressed which gradually increases in frequency as you work along the front panel, finally giving the highest frequency "beep" when the centre bottom button is pressed.

A slightly different system is used for the high/low power switch. In this case a pair of "beeps" are emitted which change from high to low when selecting low power and conversely low to high for high power. This system is also used when tuning with the UP and DOWN buttons on the MH14 microphone. The FT-212RH emits a low then high tone to indicate an increase in frequency and a high/low to denote a decrease. This system came into its own when working in cramped or poorly lit conditions, though to get maximum benefit a good musical ear would have been useful!

Those of you who prefer to operate in peace and quiet will be pleased to hear that the "beeps" can be disabled very simply from the front panel. One other nice touch was that the level of the "beep" was controlled by the main volume control. Also the ratio between the normal audio and the "beep" level was set just about right on the review model. All this came as a refreshing change.

Operation

The first operation, other than turning the power on, is usually to tune to your favourite frequency and check for activity. Tuning on the FT-212RH is achieved using either the large rotary knob on the front panel or alternatively by pressing the UP and DOWN buttons on the microphone. Each press of the buttons or click of the tuning control shifts the frequency up or down one step. These steps can be either 5, 10, 12.5, 20 or 25kHz and are set by pressing the F-WRITE and STEP buttons and then rotating the tuning knob until the required frequency step is shown on the display. The default frequency steps for the UK version is 25kHz, so you wouldn't normally need to alter the steps.

If you hold either the UP or DOWN buttons depressed the FT-212RH will start scanning the entire band stopping only when it finds a station that exceeds the squelch threshold. Once the scan has stopped the FT-212RH can be

set to either wait until the carrier drops before resuming or alternatively resume scanning after 5 seconds. While the FT-212RH is stopped during a scan the decimal point flashes to indicate that scanning mode is operational which is quite handy when using the rig at home, when you're driving it could be less useful. The scan can be stopped at any time by simply pressing the UP or DOWN buttons for a second time.

Mobile operation often necessitates using repeaters and to aid this the FT-212RH is pre-programmed with the UK repeater sub-band. This means that a -600kHz transmit frequency shift is automatically enabled when tuned to any frequency between 145.6MHz and 145.8MHz. Another big plus point is the provision of a reverse repeater button, this allows you to very easily monitor the repeater input to see if simplex operation is possible. If you should need to use a shift other than 600kHz or even to operate simplex in the repeater sub-band then this is all possible.

One of the great advantages of microprocessor control is the very comprehensive memory facilities that can be achieved and the FT-212RH is no exception. It has 18 general memories and three special purpose memories. The eighteen general memories can each store separate transmit and receive frequencies, repeater shift and (if the optional FTS-12 has been installed) tone squelch information. The procedure for storing a set of parameters in a memory is simplicity itself, all you do is press F-WRITE select the memory number and press F-WRITE again. If you're storing split transmit and receive frequencies then you merely repeat this operation but with the p.t.t. operated. I don't think you can get much simpler than that!

The recall of memories is also very simple and involves pressing the D/MR button which acts as a toggle between direct tuning and memory tuning. Once memory tuning has been selected, the rotary tuning control and UP/DOWN buttons on the microphone are used to select the required memory. Memory scanning can also be enabled in the same way as with direct tuning, though there is a very useful additional feature in that any of the memories can be skipped or hidden from the scan. This can be particularly useful if, for example, you are checking for activity but want to avoid the FT-212RH stopping on a busy local repeater.

As mentioned earlier there are three special purpose memories, called U, L and C. The U and L memories work together and hold the upper and lower limits of a programmable sub-band. Any two frequencies within the range of the FT-212RH can be stored to make up this sub-band. Once this mode has been selected you can either manually tune between the band limits or alternatively you can scan in the same way as with a simple memory scan. This programmable sub-band is a very useful feature as you could for example set up a scan of the simplex channels only. The C (call) memory is used to store one of your most common operating frequencies, perhaps the local repeater. The beauty of this memory is that it can be instantly recalled at the touch of a button. This is also ideal for storing a simplex operating frequency for when out mobile.

The final memory mode is priority channel monitoring. This is a fairly standard feature which allows you to regularly monitor a particular frequency whilst operating on a different frequency. On the FT-212RH the desired frequency should be stored in memory one and when the priority function is activated the contents of memory one will be checked every five seconds.

Digital Voice System

The digital voice system is an optional extra with this rig. I must say I found it really impressive and full of potential. The best way to describe the system is to imagine there is a tape recorder inside the rig. The facility offered enables the user to record speech, either off air or from the microphone, and to play any recording over the air or through the loudspeaker. You can see where the tape recorder analogy comes from. There obviously isn't a tape recorder involved, it's all done digitally thanks to the wonderful microprocessor.

Before you start thinking about voice synthesisers sounding like irate Daleks, think again. The FT-212RH uses p.c.m. (pulse code modulation) to convert the audio signal into a digital form that can be stored in conventional RAM (random access memory). The FT-212RH is equipped with 1Mbyte of RAM, which is sufficient to store 128s of recording when using the slowest data rate (lowest quality). The quality of the recorded speech is directly proportional



★ SPECIFICATION AND PW TEST RESULTS

GENERAL		RECEIVER	
Frequency range:	144-146MHz	Circuit type:	Double superhet (IF1 10.7MHz, IF2 455kHz)
Channel steps:	5/10/12.5/20/25kHz (user selectable)	Sensitivity (for 12dB SINAD):	<0.18µV (0.17µV)
Standard repeater shift:	±600kHz	Image ratio:	>65dB (88dB)
Emission mode:	G3E (phase mod)	Selectivity (-6/60dB):	12/30kHz (15/22kHz)
Antenna impedance:	50Ω unbalanced	Audio output:	>1.5W in 8Ω for 5% t.h.d. (1.5W)
Supply voltage:	13.8V d.c. ±10% negative ground	Squelch threshold:	?(0.1-0.35µV)
Supply current:	Transmit: 45W: 10A (7.5A) 4.5W: ? (2.6A) Receive: 300mA (300mA)	TRANSMITTER	
Frequency accuracy:	±10p.p.m. over operating temperature range -20/+60°C	RF output power:	5W/45W into 50Ω (4.5W/45W)
Case size:	140Wx40Hx160D mm	Maximum deviation:	±5kHz (±4.5kHz)
Weight:	1.25kg approx.	Spurious emissions:	>60dB below carrier

(PW Lab test results in italics)

portional to the data rate. You have a choice of four different qualities:

- 1: 32kb/s (32 seconds of recording)
- 2: 16kb/s (64 seconds of recording)
- 3: 11kb/s (92 seconds of recording)
- 4: 8kb/s (128 seconds of recording)

The RAM is actually divided into eight segments, each of which can hold separate recordings. So you could, for example, record your callsign in one, your location in another, the name of the rig in a third, etc.

To give you an idea of the speech quality, the international standard for telephone speech channels is 64kb/s. That represents best quality speech you could possibly get from a clear telephone link. So 32kb/s, although slightly down on that, still represents good communications quality speech. The slowest data rate was still perfectly readable, but the input does need to be good quality to make sure you get a reasonable representation of the voice.

The degradation involved between the various data rates can be likened to a loudspeaker rattle that gradually gets worse as the data rate slows down.

Not only can you make recordings of your own voice to save your breath, you can also make recordings of other stations signals to show them how good, or bad, they sound. Added to that is the facility for other stations with a d.t.m.f. keypad to leave messages stored in your rig for you to replay later!

Other Features

Yaesu seem to be including the ability to accept computer controlled operation with all their new equipment and the FT-212RH is no exception. The compact size of the FT-212RH means that the microphone socket has to double-up as the data port for the

transfer of data from the computer to the transceiver. Once the connection has been established then, with a suitable computer program, the operating frequency and transmit/receive switching can be controlled by computer.

The packet operator has also been remembered as the transmit and receive audio signals are available on the microphone socket. There is even the facility to extend the squelch line to the microphone socket, though this does mean losing the tone-burst facility which is not so good.

The FT-212RH is equipped with a CTCSS encoder which enables sub-audible tones to be superimposed on the signal which can then be used by other stations for selective monitoring. In order to use the system effectively an optional CTCSS decoder (FTS-12) is required. When the decoder is enabled the FT-212RH will only receive signals that contain the appropriate sub-audible tones. This facility can be quite useful for filtering activity on a very busy calling frequency.

On-Air Performance

The FT-212RH became a very popular rig during the review period. I found it to be remarkably simple to operate, despite its considerable range of features.

The audio quality was very good and there was plenty of volume for use in all but the noisiest of mobile environments without resorting to an external speaker.

I spent quite a lot of time experimenting with the digital voice system and found it to be remarkably good. In practical terms I think its main use is likely to be the recording and playback of off-air transmissions. The audio quality was very good at the fastest data rate and was still acceptable even

at the slowest rate, providing a good quality source was used. For those who want to be rather more ambitious with the use of the voice system, the eight recording segments enable a wide range of short messages to be stored.

Tuning around the band was also very easy both using the direct tuning and the memories. I found the simple memory programming to be very useful, especially when operating in a mobile environment.

The healthy 45 watts of r.f. was also a great asset for mobile use, though the advantage was mainly noticed by the other half of the QSO!

I was also pleased to see that packet operation had been considered as the FT-212RH is so easily removed from the car that it is almost bound to be called on to double-up as a base station rig. Packet operation was perfectly satisfactory with my TNC-220, though it was a shame that you had to disable the tone burst facility in order to extend the squelch line to the microphone socket.

Summary

The FT-212RH represents the state-of-the-art in compact mobile transceivers and certainly warrants close consideration if you are in this market.

The digital voice system option was certainly not just a novelty but a very practical and useful addition. Overall, the FT-212RH is a very well thought out transceiver with very few vices.

The FT-212RH costs £349.00 and the DVS-1 (digital voice system) costs £79.00. Both units are available from **South Midlands Communications, School Close, Chandlers Ford Industrial Estate, Eastleigh, Hants. SO5 3BY.**

My thanks to the SMC for the loan of the review transceiver. **PW**

Multi-Purpose Zener Diode Tester

This useful little instrument, designed by E.W. Nield GW3ARP, will give a direct reading of Zener working voltage and efficiency, in addition to junction voltage measurements of transistors and diodes.

Most of us have an assorted collection of Zener diodes from which we endeavour to select the one we need. This, at best, involves using a magnifying glass to read those cryptic letters and figures. The worst case is when diodes have lost all their markings. Next comes the fiddling around trying to rig-up a constant current supply and a voltmeter to measure the Zener's operating voltage. Finally, after a Zener of the correct voltage has been found, are we sure it still works satisfactorily?

The device described here avoids all this hassle. The diode to be tested is simply attached to the terminal clips and its working voltage read off an external voltmeter (multimeter). Is it in good condition? Pressing the "Test" button doubles the series current and any failure of the Zener to stabilise the voltage can be seen as a rise in meter reading. The increase in current is confirmed by an increase in brightness of D5.

The Circuit

The principle of working is simple enough—a current is fed via S1 and the l.e.d. (D5) to the Zener under test, and then to Tr1 which is connected as a constant current stage, (see Fig. 1). The Zener voltage is read off on a multimeter, set to an appropriate range, connected in parallel with the diode under test. The current through the Zener is then doubled from the normal 10mA by closing S2.

Diodes and Transistors

With S4 in position a, a 1kΩ load is shunted across the test leads. This limits the voltage across the leads to a safe voltage of around 20V and allows the following measurements to be made:

Diodes: It is possible to identify the anode and cathode leads of an ordinary diode, as the l.e.d. (D5), will only light when the anode of the diode under test is connected to the positive test lead. A silicon or germanium diode can be distinguished by noting the change in voltage reading when the "Test" button S2 is pressed. A silicon diode shows only a minute change,

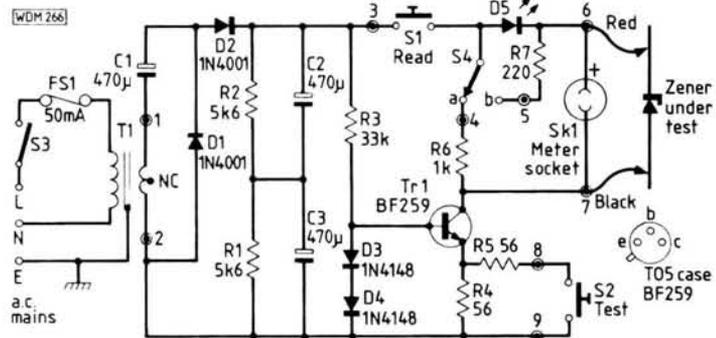


Fig. 1: Circuit diagram of Zener tester

whilst a germanium diode displays an obvious increase.

Transistors: In the same way, unmarked transistors may be identified as *npn* or *pnp* types according to Fig. 2.





Fig. 2: Test connection details of npn and pnp transistors

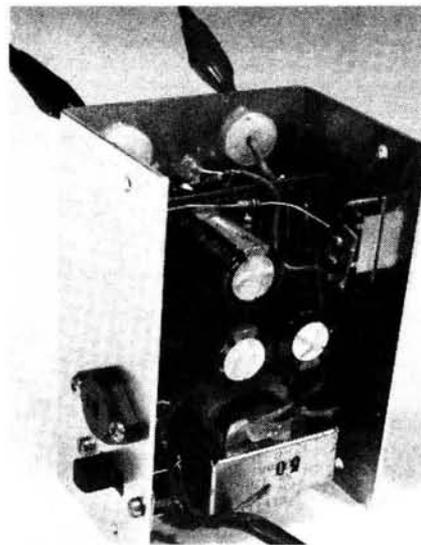

Internal view of author's prototype tester

Unless connected as shown in Fig. 2, no current flows and the D5 fails to light. The base connection is identified in this process.

If the voltmeter is connected, the junction voltages will be displayed. A silicon transistor will show a steady junction voltage of 0.7V even after the "Test" button has been pressed.

A germanium transistor, however, will usually show an appreciable increase in junction volts, this is also true of small and medium current diodes. When dealing with large current germanium diodes or transistors, this rise is not so obvious, but here the junction voltage reading is lower than a silicon device, approximately 0.2V.

Test Current

The voltages and currents in the test circuit have been adjusted to provide reliable indications of working efficiency, whilst avoiding overloading of the higher voltage types of Zeners. The test voltages and currents have also been chosen to make sure that the working parameters of Tr1 are not exceeded, particularly when diodes with low junction voltages are being tested.

This project has been designed in accordance with UK practice and safety standards at the time of publication. Overseas readers contemplating construction must ensure that they make any modification necessary to comply with their local and/or national regulations and conditions

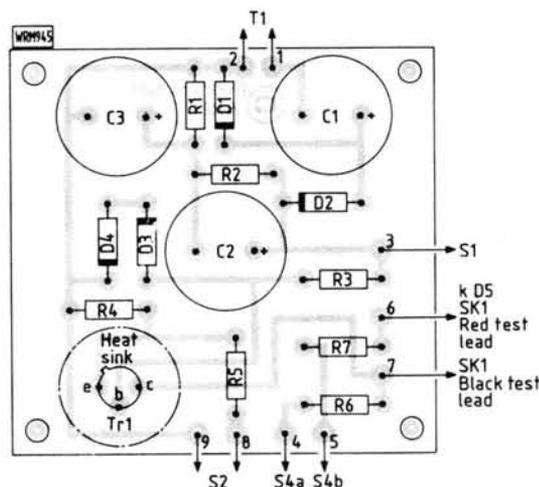
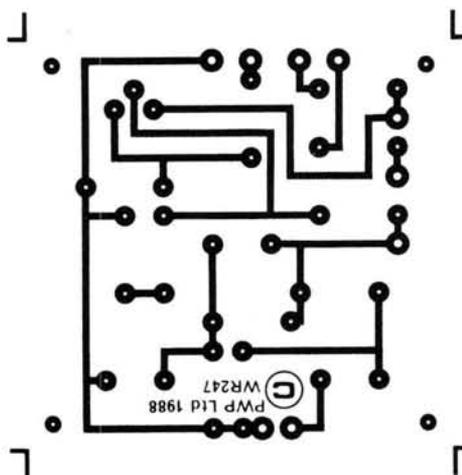


Fig. 3: Full size p.c.b. track pattern and component placement diagram

In normal use no temperature rise in Tr1 will be noticed since the test current only flows for a short period. Even if the test current was allowed to flow continuously no undue overheating would occur. However, a small heatsink could be fitted as a precaution.

The actual test current of the circuit can be checked by connecting a 100Ω 0.5W resistor across the test clips. There will be approximately 1V dropped across the resistor if all is well. With the "Test" button pressed, this voltage should increase to 2V, as the maximum current available from the

tester will be in the region of 20mA. This means the accidental shorting together of the test leads is harmless, with a maximum current of 20mA available.

Construction

The author's original prototype was constructed on Veroboard and housed in a small aluminium project box. There is, however, a p.c.b. now available for this project, (see Fig. 3). Socket SK1, used to connect an external test meter to the project, is a 2-pin DIN. This type is normally used for loud-speaker connections, but in this case it was chosen as it is impossible to insert the plug the wrong way round.

Miscellaneous

Aluminium project box; s.p.s.t. 250V miniature toggle switch; s.p.d.t. miniature toggle switch; Push-to-make switches (2); 2-pin DIN socket; 2-pin DIN plug; Insulated miniature crocodile clip—red; Insulated miniature crocodile clip—black; 12–0–12V mains transformer 50mA type 12012DB⁽¹⁾; Grommets; Cable strain relief; 3 core 2A mains cable; Nuts; Bolts; connecting wire; Expandable rubber sleeves, type 399–580⁽²⁾; 20mm chassis mounted fuse holder; 50mA 20mm fuse; Veropins; p.c.b.

(1) Electrovalue Ltd, 28 St Judes Road, Englefield Green, Egham, Surrey TW20 0HB. Tel: 0784 33603

(2) Electromail, PO Box 33, Corby, Northants NN17 9EL. Tel: 0536 204555

SHOPPING LIST

Resistors

<i>0.25W 2% Carbon film</i>		
56Ω	2	R4,5
220Ω	1	R7
5.6kΩ	2	R1,2
33kΩ	1	R3

0.5W 2% Carbon film

1kΩ	1	R6
-----	---	----

Capacitors

<i>Electrolytic 63V radial</i>		
470μF	3	C1,2,3

Semiconductors

<i>Transistor</i>		
BF259	1	Tr1
<i>Diodes</i>		
1N4001	2	D1,2
1N4148	2	D3,4
I.e.d. 0.2in Red	1	D5

How Much?
& Difficult?

£14.00

Intermediate

As with any project using a p.c.b., all off-board connection should be made via Veropins. This facilitates easy connection of a test meter if any problems should arise on completion of the project. Having said this, please read the next paragraph carefully.

Caution: This project has a mains voltage connection. Every effort must be made to insulate all joints that carry a mains voltage, including the mains switch and connections to the primary of the transformer. Insulation of such joints can be achieved with small rubber sleeves. It is also recommended that the mains plug fuse should have a current rating of no greater than 2A. **PW**

HAVING DIFFICULTY GETTING YOUR COPY OF PRACTICAL WIRELESS?

Then place a regular order with your newsagent **NOW!**



Dear Newsagent, please reserve/deliver my monthly copy of PRACTICAL WIRELESS

Distributed by Comag

Name _____
Address _____

Signed _____

Computing Corner

Some of you will remember me mentioning (quite some time ago now) the ZX COMLINK I which permits an unexpanded Sinclair ZX81 to operate modems or TNCs. I am pleased to say that this has been reviewed for us by Dave Ackrill G0DJA, and this forms the first part of this month's column.

The ZX COMLINK I is an adapter which converts ZX code from a Sinclair ZX81 computer into ASCII code suitable for RS232 applications. This enables a Terminal Node Controller (TNC) (for Packet Radio) or a telephone modem to send and receive information to and from a ZX81 with just 1K of memory.

The unit is about the size of a ZX81 16K rampack and slots into the multiway socket at the rear of the computer. It has a standard 25-way RS232 (D-type) plug on its rear face and a male-to-female lead will connect to most terminal devices.

The instruction sheet shows that six connections are required:


- Pin 1—Ground (protective earth)
- Pin 2—Transmit Data
- Pin 3—Receive Data
- Pin 4—Request to send
- Pin 7—Signal Ground
- Pin 20—Data Terminal Ready

although pin 1 is not connected within the unit, and pins 4 and 20 are taken to the same point on the internal circuit board via two fixed resistors.

Once connected up, a simple one-line BASIC statement is all that is required to make the unit run. The COMLINK signs on with a message to the ZX81 to show that it is working. At switch-on the unit defaults to 8 data-bits, 1 stop-bit and even parity. However, there are seven other data/stop/parity options available which can be selected as soon as the unit has signed on.

To use the unit with a Pak-Comm TNC 220 terminal node controller, he selected 7 data-bits, 1 stop-bit and even parity. The TNC has its own sign-on message and the display showed that both it and the COMLINK signed on without any problems. This proved they would "talk" to one-another.

For those who want to use a telephone modem or TNC which does not send back (echo) the keyboard characters as they are typed you can select a "local echo" facility to overcome this. The instruction sheet is clear and gives examples of how to use the unit where necessary. However, the unit has a lot of facilities so it is a good idea to keep

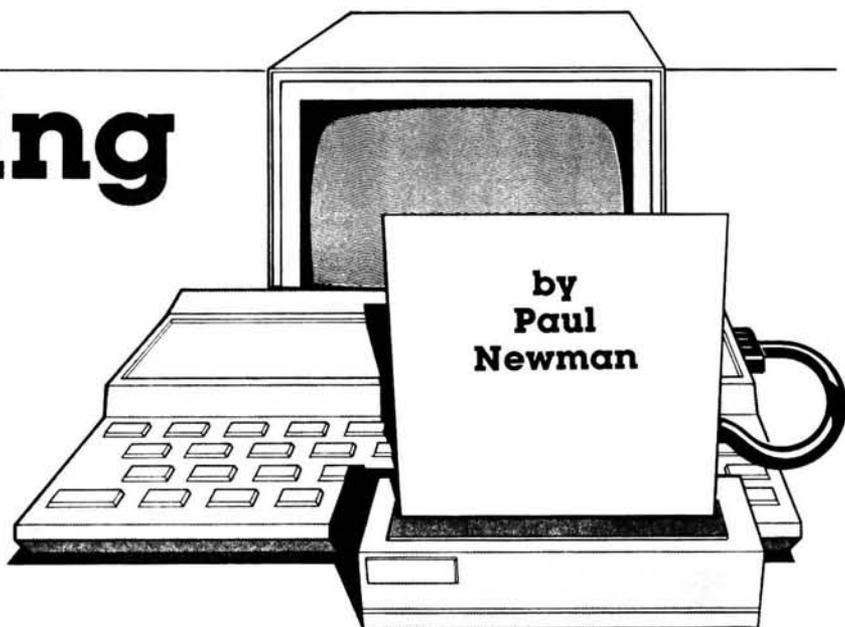

the instructions handy when using it for the first time.

The COMLINK also extends the Sinclair ZX81 basic character set to allow "control" characters, like those found on more powerful computers. These are activated via the SHIFT button along with several of the keyboard characters. This means that CNTRL-C and CNTRL-Z are possible which is useful on some Packet Radio Mailboxes. The COMLINK allows the ZX81 to display both upper and lower case characters, again selectable from the keyboard.

The MACRO feature gives the operator up to nine stored messages (via simple BASIC lines which may be loaded from tape along with the start-up line). Those readers using RTTY will know how useful this facility is for sending station details, name, etc.

One feature not used was the HEX loader. According to the instructions this allows machine code programs to be loaded into the ZX81 via a modem or TNC. However, the code must be in INTEL absolute hex-format and the reviewer could not discover whether hex from other computers conformed to this format. It may be possible to exchange machine-code programs over the air using the "transparent" mode. Obviously, if the other station is using a ZX81 and COMLINK there will be no problem. But you will still need to know how to handle hex.

Conclusions

The COMLINK is a very useful interface. It was more reliable than the reviewer's usual ZX81 RS232 interface but it will only run at 300 baud (the on-air data rate can be different). This would not be a problem on the older TNCs like the TNC-200 which have their baud-rate selected via external switches. Newer units like the TNC-220 default to 1200 baud but 300 baud can be selected simply by entering the TNC selection command at the ZX81 keyboard. Some TNC units will search through the baud rates and lock

onto the interface baud rate. The Kantronics All-mode (KAM) is one of these.

Although this review covered Packet Radio the COMLINK could also be used with a c.w., RTTY, ASCII, FAX or telephone modem, so long as they output RS232 signals. 1200 Baud operation is not possible with the COMLINK although this is absolutely no problem on two grounds; (a) the on-air rate can be different and (b) no-one can type at speeds greater than 300 baud! (COMLINK designer's comment).

I am sure that many will find Dave's review of great interest and I'm very grateful for all his work. Interestingly, Dave found the system more reliable than his Spectrum setup and he's making arrangements to obtain a COMLINK. If anyone else is interested in obtaining a unit then I can arrange this without you having to be concerned with US dollar transfers. The total cost including postage will probably be well under £30.00 depending upon the value of the dollar against the pound! Contact me if you want further information.⁽¹⁾

I am constantly being asked if there is any way in which programs designed for one micro can be loaded and run in another. Generally of course, my answer is always that there is none, so I'm glad that there is at least the prospect that CPC6128 owners will soon be able to load and run Spectrum BASIC tapes.

BETASOFT, the software house that produced BETABASIC, announce their intention to launch a Spectrum-ROM emulator for the CPC6128 should demand be sufficient. The program will permit Spectrum BASIC tapes to be loaded directly into the CPC and RUN without any further treatment. Machine-code programs will NOT run due to technical differences in hardware, interrupt handling, etc.

The chief advantage of this system is that it makes a large number of BASIC programs supplied on tape, available

SCANNERS

BEARCAT BY uniden



UBC 175XL



UBC 100XL
UBC 50XL
UBC 70XL

RAYCOM ARE TRADE AND RETAIL DISTRIBUTORS FOR THIS SUPERB RANGE OF QUALITY SCANNERS. THE POPULAR UBC 100XL HAND HELD HAS SOLD IN THOUSANDS, BUT IS NOW COMPLIMENTED BY THE UBC 70XCL POCKET SIZED HANDHELD. ALSO THE NEW COST EFFECTIVE UBC 50XL HANDHELD. SEE THE NEW MODELS IN OUR SHOWROOMS OR SEND A S.A.E. FOR DETAILS. FROM £95.00 + carriage

RAYCOM

COMMUNICATIONS SYSTEMS LTD

TEL: 021-544 6767

RAYCOM NEWS . . .

Ten meters is proving very popular these days! I wonder why! . . . The new Two meter transverter is now available . . . The RZI is now supplied by the Importer modified to 950MHz . . . where did they get that idea from? Angus says the FT47 has had reciprocal mixing performance . . . Told you so! . . . We modified it 3 months ago! . . . 73 Ray.

CALL US IF YOU WANT THE LATEST TECHNOLOGY, FREE!

SCANNERS

YAESU FRG9600 from the company who specialises in fitting extra options, as supplied to Government departments and professional bodies. We also upgrade existing models, please call for more details, prices, delivery and information.

- Yaesu FRG9600 Basic Model Improved 'S' Meter + Sens £465.00
 - Yaesu FRG9600/RWC Mk2 60-950MHz 'N' Connector Fitted £495.00
 - Yaesu FRG9600/RWC Mk3 HF 100KHz-950MHz plus Mk2 Spec £595.00
 - Yaesu FRG9600/RWC Mk5 HF 50KHz-950MHz Active Mixer £625.00
 - Yaesu PAL Video Unit for above £77.50
 - Icom ICR7000 25M-2GHz superb quality professional Rx £859.00
 - Icom ICR7000/AH7000 Receiver plus Matching Discone £937.50
 - Kenwood RZ 1 New 500KHz-950MHz Wide and Narrow AM/FM POA
 - Fox VHF-UHF Multi Function Mobile Scanner FM only £139.00
 - Uniden-Bearcat UBC 50XL VHF-UHF 10ch. H/held Scanner £95.00
 - Uniden-Bearcat UBC 70XL VHF-UHF 20ch. Miniature H/held £179.00
 - Uniden-Bearcat UBC 100XL VHF-UHF-Airband H/held Scanner £189.00
 - Uniden-Bearcat UBC 175XL VHF-UHF-Airband Desk-Top £175.00
 - BJ200 Mk2 VHF-UHF-Airband-Military Airband H/held £220.00
 - AOR 2002 25-550, 800-1300MHz Desk-Top/Mobile AM/FM £469.00
 - Sony Air 7 Top Quality VHF-Airband Handheld Scanner £245.00
- Package deal on above Mk3/5 FRG9600 c/w AH7000 discone, G5RV, PA4 AC PSU, complete receiving station HF-UHF including delivery UK mainland. Add £100.00 to above price.

PACKAGE DEAL AVAILABLE ON ALL MAKES. IF IT'S GOOD, WE STOCK IT!

A new concept in Amateur Radio . . . uniden 2830

It's here at last! A beautifully-made processor-controlled full feature 10w(20w PEP) multimode transceiver with LCD readout and all functions necessary to work DX with Sporadic E and in the forthcoming sunspot maxima and also for transverting to the VHF and UHF bands. Work out the facts . . . how much is a Two Metre Multimode? How much is the Uniden 2830 Ten Metre Multimode and a 2 metre transverter? With the Uniden 2830 you can have two bands for the price of one, with 10 watts on each band and all modes including CW.

Features

- ★ All modes, AM/FM/USB/LSB/CW
- ★ LCD readout of frequency/functions
- ★ CW with Sidetone
- ★ FM bandwidth compatible with VHF/UHF
- ★ 10Watts continuously variable o/p AM and FM
- ★ Scanning feature, up and down steps on mic
- ★ Selectable frequency steps, 10KHz, 1kHz, 100Hz
- ★ Ten metre band selectable in 500KHz steps
- ★ Build-in VSWR meter and protection circuit
- ★ Superb receiver sensitivity - 3uV FM

Just TEN of the many reasons for choosing the UNIDEN 2830

THIS PRODUCT IS EXCLUSIVE TO RAYCOM, WE ARE THE U.K. DISTRIBUTOR. WHOLESALE ENQUIRIES WELCOME



10 metre band amateur transceiver

£249.00
£10.00 post and packing

10/2 metre version out soon @ £399.00

HANDHELDS

- * = Extended Receiver coverage available, call for details
- YAESU FT727R/FNB4A 2.5W (5W) DUAL BANDER C/W CHRGR £395.00
- *YAESU FT23R/FBA10 2.5W (5W) 2MTRS £229.00
- *YAESU FT73R/FNB10 2.5W (5W) 70CMCS C/W CHARGER £259.00
- *ICOM MICRO 2E 2.5W 2MTR HANDHELD WITH CHARGER £209.00
- CTE1600 (SAME AS ICOM IC2E) C/W NICAD CHARGER £179.00

Many other types of handheld stocked, please enquire.

SHORT WAVE RECEIVERS

- Yaesu FRG8800 Short Wave 100KHz-30MHz all Mode - Mem £589.00
 - Yaesu FRG8800/FRV8800 as above with VHF Conv. fitted £679.00
 - Icom ICR-71 Top Grade Communications Receiver £799.00
 - Sony PR080 HF/VHF Handheld Scanner c/w accessories £345.00
 - Sony 2001D Short Wave/Airband Receiver at £349.00
 - Sony SW1 Micro Short Wave Receiver £249.00
- Many more makes and models in stock. PLEASE CALL FOR PRICES DELIVERY COSTS and any advise or information, or send large SAE (insured post and packing £10.00. Carrier £12.50)

MOBILES

- YAESU FT211RH 45W 2MTR MOBILE WITH FREE 1/4 WAVE ANT £299.00
- YAESU FT212RH NEW 45W 2MTR MOBILE DVS FEATURE OPT £349.00
- *ICOM IC28E 2MTR 25W MOBILE WITH FREE 5/8 ANTENNA £359.00
- Alinco Dual Band ALD-24E £445.00
- ICOM IC48E 70cm 25W £428.00
- ICOM IC3200 Dual Band 25W SPECIAL £399

Compare our prices!

Many other types and makes stocked, please enquire.

PORTABLES

- FT290RMK2 2.5W MULTIMODE STANDARD ACCESSORIES £399.00
- FT290RMK2 2.5 WATT M/M AS ABOVE C/W NICADS CHRGR £425.00
- FT290RMK2/FL2025 (STD) WITH 25W LINEAR AMPLIFIER £489.00
- FT690RMK2 6MTR 2.5W MULTIMODE STANDARD ACCES £399.00
- FT690RMK2 6MTR 2.5W M/M AS ABOVE C/W NICADS CH £425.00
- FT790RMK2 NEW 70CM 2.5W MULTIMODE DUE OUT SOON £499.00

ANTENNAS & ACCESSORIES

NOW AVAILABLE AT RAYCOM: CUSHCRAFT, BUTTERNUT, HY-GAIN ANTENNAS, JAYBEAM, TONNA, MET, HAM-M ROTATORS. Call for full details, prices, availability and delivery costs.

- ICOM AH7000 SUPER 250-1300MHz DISCONE £79.50
- G5RV HALF SIZE HF ANTENNA ready to use £16.50
- G5RV FULL SIZE HF ANTENNA ready to use £18.50
- G8KW-TYPE 7 1MHz TRAP DIPOLE KIT SO239 £24.50
- G8KW-TYPE as above for use with 75 OHM £23.50
- G8KW-TYPE 2X 7.1 TRAPS ONLY. LESS CABLE £9.95
- RAYCOM AIRBAND-VHF SIX ELEMENT DISCONE £12.50
- RAYCOM DISCONE VHF 60-600MHz 8E SO239 £9.50
- SUN KG209 SE2M 5/8 MOBILE TILT-OVER 259 £14.50
- RAYCOM CAST GUTTERMOUNT C/W SO239/COAX £8.50
- GAMMA TWIN 2 METRE SLIM JIM KIT inc. instr. £14.50
- RAYCOM/RWC HB9CV 2 METRE 2E MINI BEAM £12.50
- RAYCOM/RWC HB9CV 70CM 2E MINI BEAM £8.95

The above popular products POST FREE. (UK mainland only)

YAESU FT 747GX

£649.00 including our FREE fitted MOD Board!


We improve the reciprocal mixing performance by up to 15dB which gives you receive performance of higher priced rigs! Only available from Raycom, buy it elsewhere if you want SECOND BEST! YAESU IS STILL BEST VALUE FOR MONEY!

ALL CURRENT YAESU AND ICOM HF RIGS STOCKED, CALL FOR A DEAL!

ROYAL 1300 WIDEBAND DISCONE

Following the huge success and popularity of the 25-1300MHz, wideband discone antenna - Icom AH 7000 & Welz - Diamond D109 with transmit facilities on VHF-UHF amateur bands, Raycom decided to persuade a UK manufacturer to make a "BRITISH COPY!" at a very competitive price!

COMPLETE WITH PROFESSIONAL CABLE & CONNECTORS AT ONLY £59.50 P&P £5.



CALL IN, EASY TO GET TO, EASY PAYMENTS

Opening hours 9am-5.30pm 6 days, late nights Thursday & Friday till 7pm. We stay open later!

ORDERING INFORMATION

ALL PRODUCTS WE ADVERTISE ARE NORMAL STOCK ITEMS. OUR NEW MAIL ORDER DEPARTMENT CAN NOW DESPATCH MANY ITEMS SAME DAY, BUT PLEASE ALLOW UP TO 14 DAYS. DELIVERY TIME IS SUBJECT TO CARRIAGE METHOD. IF ORDERING BY MAIL PLEASE INCLUDE CARRIAGE AND STATE YOUR DAYTIME TELEPHONE NUMBER. ALL PRODUCTS OVER £750.00 CARRIAGE FREE. PLEASE ALLOW TIME FOR PERSONAL CHEQUES TO CLEAR. PLEASE CALL BEFORE ORDERING AND FOR MORE INFORMATION

PLEASE TEL: 021 544 6767

RAYCOM COMMUNICATIONS SYSTEMS LTD.
INTERNATIONAL HOUSE, 963 WOLVERHAMPTON ROAD
OLDBURY WEST MIDLANDS B69 4RJ
Telephone 021 544 6767. Fax 544 7124. Telex 336483 Identi-G

RAYCOM gives you MORE PURCHASING POWER!



FOR FAST SERVICE PHONE IN YOUR ORDER WITH ANY MAJOR CREDIT CARD OR IN MOST CASES WE CAN OFFER YOU INSTANT CREDIT OF UP TO £1,000.00 (SUBJECT TO STATUS. RAYCOM ARE LICENSED CREDIT BROKERS. APR 29.8%, SUBJECT TO VARIATION. FREE CREDIT ON CERTAIN PRODUCTS AT LIST PRICES, 50% DEPOSIT AND SIX MONTHLY PAYMENTS. PLEASE TELEPHONE FOR MORE DETAILS AND APPLICATION FORMS.

NEW INFO 0836 282228 available 5-9pm (weekdays only)



FOR THE BEST IN AMATEUR RADIO

THROUGH YOUR CONTINUOUS AND VALUED CUSTOM, RAY WITHERS COMMUNICATIONS LTD. HAS MOVED AND EXPANDED TO ENABLE US TO OFFER YOU EVEN BETTER SERVICE AND PRICES - STILL WITH THE RAYCOM GUARANTEE, BEST EQUIPMENT, BEST SERVICE, BEST PRICES, BEST BACK-UP, AND PLENTY OF PARKING FACILITIES AND EASIER TO GET TO! WE NOW BOAST THE BEST CENTRAL FACILITIES IN THE COUNTRY. WHY NOT POP ALONG AND SEE THE LATEST TRANSCEIVERS, SHORTWAVE/SCANNING RECEIVERS AND ACCESSORIES? MOST OTHER PRODUCTS ADVERTISED IN THIS MAGAZINE ARE AVAILABLE AT RAYCOM, AND DON'T FORGET OUR EXCLUSIVE PRODUCTS AND MODIFICATIONS!

to the CPC6128 user without any prior knowledge of either Spectrum or Locomotive BASIC. The GM4IHJ satellite programs would all run exactly as supplied on tape, for example.

If you are interested in this product (which will have an issue price of about £10.00) then please write to Dr A. Wright at the address (ii) or I'll gladly pass on comments myself.

Spectrum Plus-3 users will be pleased to know that the +3 version of BETABASIC is coming along well and looks almost certain to be available very soon.

Recently a number of QL users have taken advantage of the limited radio software library available through me, Hil G4YNV has been reworking a few of the more interesting items. He came across a serious bug in the "G6TJT ATV" program and has prepared a fix as detailed here.

Owners of JS-ROM QLs may have experienced difficulties in getting G6TJT's ATV program to do anything other than lock the computer up. The cause is an attempt to redefine the PRINT keyword; this worked on some earlier ROMs but wreaks havoc with the JS version. The way to a usable program is as follows:

1. Load the program—DO NOT run it!
2. Enter DLINE 26200 TO 26420
3. EDIT 10560 to read FOR n = 0,1,2 : PRINT#n,cs\$;
4. SAVE the amended version.

5. To use the amended version, RESET the QL before LRUNning in MODE 8. NEW will not be enough presumably because the QL fails to clear the erroneous definition from the name-table.

Briefly

Anyone seeking Radio Amateur Examination courses suitable for use in the home, or by the house-bound is asked to contact Peter G4EGQ⁽ⁱⁱⁱ⁾ who administers such courses under very flexible arrangements.

Many correspondents asked for the source of the items extracted for *Mega-hertz* (a French Radio magazine) mentioned in the July 1987 *PW*. Please enquire for opening times, photocopy service, etc., from reference (iv).

John G4VJK drew my attention to the PD Software Library^(v) who hold a considerable Public-Domain software library including some radio software volumes. Micros supported include IBM/PC and MSDOS and CP/M operating systems.

I understand that a Spectrum FAX decoder will be available from JEP Electronics by the time this is read and I hope to include a review whenever possible, along with one on the CPC464/6128 Morse decoder.

Pearson Computing tell me that the minimum-hardware Packet Radio system for the Spectrum is still incomplete but work continues with hopes of a worthwhile product. To complete the

round-up of software suppliers, Technical Software (GW3RRI) say that developments are always in hand but there was nothing specific to report as yet.

Several recent correspondents paid tribute to the assistance given by all major suppliers in overcoming difficulties of various kinds centred around getting various programs working with the Spectrum Plus-3. I understand that most problems are now resolved and Plus-3 versions of most major programs are available on disk.

Many thanks for your continued support for the column and I always look forward to your letters and comments.

References

- (i) Paul Newman G4INP, 3 Red House Lane, Leiston, Suffolk IP16 4JZ (s.a.c. essential).
- (ii) BETASOFT, 24 Wyche Avenue, Kings Heath, Birmingham B14 6LQ.
- (iii) Peter G4EGQ, 146 Elms Vale Road, Dover, Kent CT17 9PN.
- (iv) British Library Science Reference and Information Service, 25 Southampton Buildings, London WC2A 1AW Tel: 01-323 7928.
- (v) PD Software Library, Crowborough, Sussex.

OUR SERVICES

QUERIES

We will always try to help readers having difficulties with a *Practical Wireless* project, but please observe the following simple rules:

1. We cannot give advice on modifications to our designs, nor on commercial radio, TV or electronic equipment.
2. We cannot deal with technical queries over the telephone.
3. All letters asking for advice must be accompanied by a stamped, self-addressed envelope (or envelope plus International Reply Coupons for overseas readers).
4. Write to the Editor, "Practical Wireless", Enefco House, The Quay, Poole, Dorset BH15 1PP, giving a clear description of your problem.
5. Only one project per letter, please.

COMPONENTS, KITS AND PCBs

Components for our projects are usually available from advertisers. For more difficult items, a source will be suggested in the article. Kits for our more recent projects are available from CPL Electronics, and from FJP Kits (see advertisements). The printed circuit boards are available from our PCB SERVICE (see page 68 of this issue).

CONSTRUCTION RATING

Each constructional project is given a rating, to guide readers as to its complexity:

Beginner

A project that can be tackled by a beginner who is able to identify components and handle a soldering iron fairly competently.

Intermediate

A fair degree of experience in building electronic or radio projects is assumed, but only basic test equipment is needed to complete any tests and adjustments.

Advanced

A project likely to appeal to an experienced constructor, and often requiring access to workshop facilities and test equipment for construction, testing and alignment. Definitely not recommended for a beginner to tackle on his own.

BACK NUMBERS AND BINDERS

Limited stocks of most issues of *PW* for the past 18 years (plus a few from earlier years) are available at £1.30 each, including post and packing to addresses at home and overseas (by surface mail).

Binders, each taking one volume of *PW* are available Price £3.95 to UK addresses, or overseas, including post and packing. Prices include VAT where appropriate

CLUB NEWS

If you want news of radio club activities, please send a stamped, self-addressed envelope to **Club News**, "Practical Wireless", Enefco House, The Quay, Poole, Dorset BH15 1PP, stating the county or counties you're interested in.

ORDERING

Orders for p.c.b.s, back numbers and binders, *PW* computer program cassettes and items from our Book Service, should be sent to **PW Publishing Ltd., FREE-POST, Post Sales Department, Enefco House, The Quay, Poole, Dorset BH15 1PP**, with details of your credit card or a cheque or postal order payable to **PW Publishing Ltd.** Cheques with overseas orders must be drawn on a London Clearing Bank.

Credit card orders (Access, Mastercard, Eurocard or Visa) are also welcome by telephone to Poole (0202) 678558. An answering machine will accept your order out of office hours.

SUBSCRIPTIONS

Subscriptions are available at £14 per annum to UK addresses and £18.50 overseas. For further details, see the announcement on page 28 of this issue. Airmail rates for overseas subscriptions can be quoted on request.




Morse Keys

G4ZPY Paddle Keys is a new name in the field of Morse Key manufacture. At the moment there are three keys in the range, the traditional "straight" key, a single and a twin paddle key.

The keys are made in highly polished brass and nickel plated brass, each being hand-built. The straight key is mounted on either Lakeland stone or Greek marble, the latter is available in five colours.

The single and twin paddle keys are G4ZPY's own design and come mounted on heavy steel bases. Marble bases are available to order.

Other products available are iambic keyers, baluns

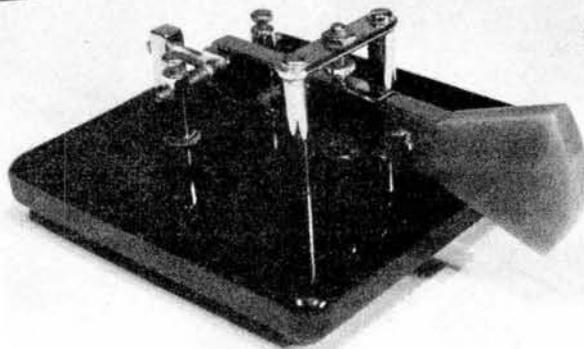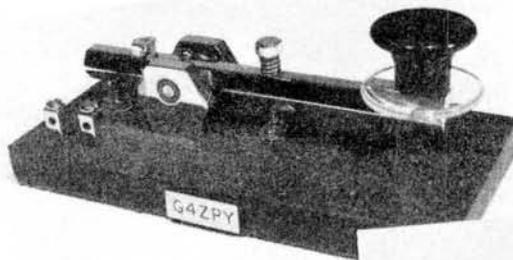


and practice oscillators. An s.a.e. to Gordon G4ZPY will bring details of all the products available.
G4ZPY Paddle Keys,
 41 Mill Dam Lane,
 Burscough,
 Ormskirk,
 Lancs. L40 7TG.

Rack Mounted PSUs

BNOS have announced a new range of high current rack-mounted linear power supply units.

They have been designed for applications where low noise and high reliability is important. The range covers output voltages of 2 to 30 volts and current levels of up to 100A d.c.

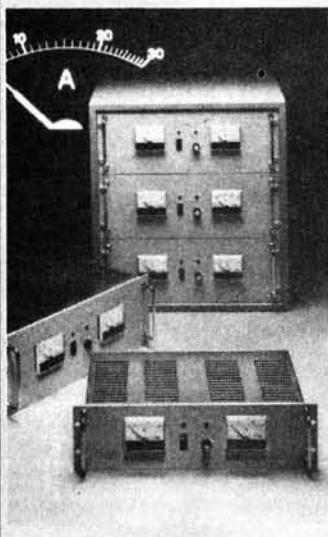

The units are housed in a 3U or 4U 19in rack with either analogue or digital read-outs. A full data sheet is available from:
BNOS Electronics Ltd.
 Mill Lane,
 Stebbing,
 Great Dunmow,
 Essex CM6 3SL.
 Tel: 0371 86681.

College Courses

Liverpool: RAE classes will be held at Sandown College, Faculty of Engineering, Sandown Road, Liverpool L15 4JB. The course starts September 13 on Tuesdays and Thursdays, 6.30-9pm. They will be covering the CGLI syllabus and providing Morse tuition to examination standard. Further details from the course tutor, **J.C. Loughlin G4DKQ. Tel: 051-733 7211 ext 333.**

Manchester: RAE classes will be held at Pendlebury High School, Cromwell Road, Swinton, Mondays at 7.30pm commencing late September. The instructor is P. Whatmough G4HYE.

Details from: **G4HYE. Tel: 061-794 3706** or from **Swinton Adult Education Centre. Tel: 061-794 5798.**
Manchester: Morse classes will be held at Pendlebury High School, Thursdays at 7.30pm commencing late September. The instructor will be W. Stevenson G4KKI. Details from **Swinton Adult Education Centre. Tel: 061-794 5798.**

Can You Help?

Mr Tom Benfield is restoring a Nagard Oscilloscope type DS103. He would be pleased to receive any information on this oscilloscope or its power supply. Also any information on the company would be of help too. Write to: **Tom Benfield, 47b Warneford Street, London E9 7NG.**

CRUG Goes Public!

A few months ago the Commodore Radio Users Group started up, little did the originator envisage what was ahead. Around 130 or so people registered initially and it has been the general consensus of opinion that the group should produce their own magazine and be run along the lines of most other computer/radio user groups.

As from June 1, the CRUG

became a "real" user group. A magazine will be produced four times a year and will be known as *Connections*. Subscriptions have been fixed at £8 for the first year and will be reviewed next year.

For further information on the group, contact:

Commodore Radio Users Group
 Simon Lewis GM4PLM
 69 Irvine Drive
 North Clippens
 Linwood
 Paisley
 Renfrewshire PA3 3TB

1901-2099 Clock

Maplin Electronics have introduced the 200 year calendar clock. It features an l.c.d. digital alarm clock and calendar with a permanent display of the time, year, month, day and calendar for the current month.

The time may be set to display in the 12 or 24-hour format. The date and calendar displays can be moved forward or back in one month steps to any month between the years 1901 and 2099.

The case which houses the 73 x 40mm display is in gold anodised alloy with dark brown end pieces. The price for the clock is £14.95 inc VAT.

Maplin Electronics,
 PO Box 3,
 Rayleigh,
 Essex SS6 8LR.

Only the Name has Been Changed

As from May 1, the Earlestown branch of ARE Communications Ltd., separated from their parent company and is now known as Amateur Radio Communications Ltd. The address is 38 Bridge Street, Earlestown, Newton-Le-Willows, Merseyside, telephone 09252 2988 1.

The only thing that has altered is the name. The shop will be carrying on with the same policies as before. Peter Roberts G4KKN is now the owner and Frank and Elaine will still be there to help you with your enquiries. The shop is open Tuesdays and Saturdays, 10am to 5pm.

Tidy up your shack

PW BINDERS

Only £3.95 each (Including Post, Packing and VAT)

Are you tired of sifting through cardboard boxes and carrier bags to find that useful item in PW?

Our **smart new style** binders, covered in blue plastics, are a must for your library, keeping your radio magazines in good condition and easily accessible.

New!

Tidy up those other mags too. Plain binders to take any A4 size magazines—no names, no pack drill!

HOW TO ORDER

PW or plain Binders are £3.95 each (including Post, Packing and VAT). Send a postal order, cheque or international money order with your order, stating number and type required to **PW Publishing Limited, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP**. Payment by Access, Mastercard, Eurocard or Visa also accepted on telephone orders to Poole (0202) 678558. Normally despatched by return of post but please allow 28 days for delivery.



0202 678558   (24 hour Answer Service)

SUBSCRIPTION OFFER

One Year — £14.00
Two Years — £26.00
Three Years — £36.00

Wherever you live, a Postal Subscription will ensure that you receive your copies of PRACTICAL WIRELESS and/or SHORT WAVE MAGAZINE regularly, through your own letterbox, before it gets onto your newsagent's shelf. Order a Joint Subscription and you will qualify for the Special Discount.

Fill in the Order Form below and post it to: PW Publishing Ltd., FREEPOST, Subscriptions Dept., Enefco House, The Quay, Poole, Dorset BH15 1PP (no stamp required). Credit Card Orders taken on (0202) 678558.

Overseas subscriptions outside Europe are now despatched by Accelerated Surface Post for faster delivery.



Please indicate the type of subscription required:

Special Joint Subscription



- See above (UK)
 See SWM (July) for offer details
 £27.00 (UK)
 £18.50 (Overseas)
 £30.00 (Overseas)

(Prices correct at February 1988)

To commence with issue dated

To: PW Publishing Ltd., FREEPOST, Subscriptions Dept., Enefco House, The Quay, Poole, Dorset BH15 1PP (no stamp required).

Name

Address

I enclose cheque/PO (Payable to PW Publishing Ltd) £

Charge to my Access/Visa Card the amount of £

Card No.

  Valid from to

Signature

ALINCO - THE NAME THAT MEANS VALUE!

- ★ 130-170MHz Rx
- ★ 144-146MHz Tx
- ★ 3/6w output
- ★ Battery Saver
- ★ LCD - 10 Memories

£229

DJ-100E




The latest handheld from ALINCO combines the latest technology with competitive pricing. Small enough to fit into most pockets it will find a wide number of applications. Particularly interesting is the extended frequency coverage on receive from 130MHz to 170MHz. For special applications it may also be possible for us to extend the transmit coverage. Unlike many of its competitors, the price includes all the accessories including ni-cad pack, AC charger, belt clip and carry strap. For full details send SAE today.

ALD-24E

DUAL BANDER

- ★ 2M/70cm
- ★ 25 Watts
- ★ Full Duplex
- ★ Built-in Diplexer/Dual VFO
- ★ Small size/21 memories

£449!

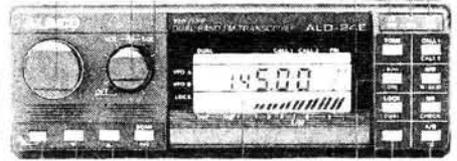

What can you say about this transceiver other than praise? The new ALINCO ALD-24E has brought the cost of dual banders down to a price that makes it a serious option to the 2 metre only rig. Just think of the pleasure of being able to select 2m or 70cm at the press of a button. No aerial switching (diplexer built in) and full duplex operation. The ALINCO actually has two completely separate transceivers built into its small case measuring 5.5" x 2" x 6.5". It has all the features of the ALR-22E (see below) at a huge saving over its competitors. We could mention the optional extended receiver coverage of 138-174MHz & 420-454MHz at no extra charge, but then everybody would want one! So we thought that we'd simply invite you to send for the full colour brochure instead.

ALR-22E 2M FM MOBILE

THE RADIO COSTS

£249

THE SCANNER COMES FREE ON REQUEST!

- ★ 25 Watts FM
- ★ 21 Memories
- ★ Rx 138-174MHz
- ★ Mini-size



ALINCO products are hitting the market in a big way. And the ALR-22E must rank as today's best buy. When you buy the ALR-22E you don't just purchase a 2 metre mobile, you purchase a vhf scanner as well. For no extra cost we will extend the frequency coverage to 138-174MHz on request. All this for a price that puts the competition in the shade! Features include 21 memory channels, programmable scan, priority channel options, programmable splits, reverse repeater button, dual speed scanning, optional delay, back-lighted LCD display, dual vfo, lithium battery back-up, 25/12.5kHz steps, mini size measuring 5.5" x 1.5" x 6.5", up/down microphone control, quick release mobile bracket plus mounting hardware, superb sensitivity, 5 watt low power position, manual or electronic tuning, 12 months parts and labour warranty etc. With a specification like this we suggest you phone for colour brochure, today.

BOOKS BOOKS BOOKS!

HF OCEANIC AIRBAND COMMUNICATIONS
Published December, 1987

Tune into the exciting World of long distance airband communications. Hear aircraft navigating the world's oceans; air and sea rescue in action; flight crews talking back to base; instant weather broadcasts from all corners of the world. It's exciting, and this book will tell you exactly where and when it all happens.
£3.50 plus 80p post.

UK LISTENERS CONFIDENTIAL FREQUENCY LIST
New 5th edition. Available April 1988

Everything you have ever wanted to know about the short wave services. Who uses them, their frequencies, call signs and times. It's all in this book. 150 pages and some 7,000 entries plus editorial covering aerials, receivers, RTTY, FAX, TOR etc. A genuine UK publication based on the very latest information and monitoring NOT AN AMERICAN COPY! Includes civil & military aircraft, press and meteo., embassies, maritime, emergency, broadcast, weather, beacons etc. Available April 1988. **£6.95 plus £1 postage.**

HF AERIALS AND ROTATORS

C4	6-10-15-20m Mini vertical	89.00
CP5	5 band vertical + radials	189.00
CP4	4 band vertical + rigid radials	149.00
CP3	6/10/15m vertical + radials	49.00
MM3	Minimax 3 el minibeam	325.00
TB3MK3	3 band 3 el 2kW	315.00
TB2MK3	3 band 2 el 2kW	210.00
TB1MK3	3 band 1 el 2kW	105.00
VR3	3 band vertical 1kW	73.00
EL40X	Sagant 70ft 80/40m dipole + balun	59.95
MT240X	Sagant 70ft 80-10m dipole system	78.00
BL40X	1 : 1 50 Ohm balun 1kW	19.50
GC038	Lower mast clamps for "400" series	16.95
GS065	Alignment bearing for 2" masts	29.95
AR 200XL	Lightweight rotator for medium VHF	49.95

NEW! 50-1300MHz

CLP 5130-1
50-130MHz



CLP 5130-2
105-1300MHz

These antennas cover the complete range to 1300MHz with a VSWR better than 2:1. They can be mounted vertically or horizontally with the hardware provided. And with a power handling capability of 500 watts they are equally at home transmitting or receiving. Forward gain up to 12dBi & 13dBi and front to back ratios of 15dB are achieved respectively. Model 1 £179.00. Model 2 £89.00. Carriage £3.00.

THE COMPLETE GUIDE TO VHF/UHF FREQUENCIES

Covering the range 26 to 47000MHz, this new edition provides full details of frequencies used within the UK. Covering emergency services, aviation, marine, PMR, beacons and repeaters, weather, space etc. The pages are full of all the information that you need in order to operate your scanning receiver. 90 pages crammed with frequencies, both simplex and duplex, plus editorial on all that you should know about VHF/UHF monitoring. **£5.95 plus £1 post.**

VHF/UHF AIRBAND FREQUENCY GUIDE

A complete list of all the aviation frequencies for both the military and the civil services. Frequencies are listed under airport/airfield headings and includes details of airways and company frequencies. Also supplied with the book is a list of all the recent changes to UHF and VHF frequencies that have taken place. Includes editorial and photographs etc. A must for the aircraft enthusiast. **£5.95 plus £1 post.**

THE SECRET OF LEARNING MORSE CODE

Here's a book that takes the problem of learning Morse by the scruff of the neck and exposes the myths and mysteries that surround this most valuable skill. The author, Mark Francis, takes you simply but thoroughly through the whole learning process and shows that with his method you will quickly be able to read Morse code. Long overdue, the book is written in a non technical language which makes it a joy to read. Mark Francis covers all aspects of the subject and provides some very valuable tips on the best ways to learn and improve your code. And once you have learnt the code you can test yourself with the sample tests at the back of the book. There is even a chapter that tell you exactly what you should expect when you take your seat in the examination room for your RAE Morse test. As one readers said, "it's the most comprehensive book available on the subject today." **£4.95 plus £1 post.**

HF & VHF RECEIVERS

R-2000	Trio receiver & VHF option	595.00
R-5000	Trio deluxe receiver	875.00
ICF7600DS	Sony rx AM/SSB/CW to 30MHz	169.00
ICF7600DA	Analogue version of above	159.00
ICF2001D	150kHz-30MHz rx + Air-band	329.00
ICFSW1S	Micro HF receiver kit	249.00
ICFPRO-80	150kHz-225MHz portable all mode	329.00
FRG8800	Yaesu 150kHz to 30MHz	639.00
IC-R71	Icom hf receiver	825.00
HF125	Lowe hf receiver	375.00
WIN 108	Airband scanner 108-136MHz	175.00
SONY AIR-7	Monitor 108-174MHz + AM/FM	249.00
SONY PRO-80	As above but 150KHz-225MHz	329.00
R537S	Tunable plus 2 xtal positions	69.50
R535	VHF/UHF Airband Monitor	249.00
LCBP	Nicad pack & case	42.75
R7000	ICOM All-mode rx 25MHz-2gHz	957.00
AOR2002	25-550/800-1300MHz scanner	487.00
AOR2001	25-550MHz scanner	325.00
IF323C	Computer interface for 2002	255.00
MB2001	Mobile mount for 2001/2002	11.50
SONY-AIR-7	108-174MHz + AM/FM	249.00
SONY PRO-80	150KHz-225MHz handheld	329.00
FRG9600m	60-950MHz 12v DC	509.00

NEW PRODUCTS!

Hopefully you will see our latest products at NEC. If you don't make it then read on and see what goodies we have in store for you.

First item is pictured in this advert, the new ALINCO wide-band handheld that covers 130-170MHz with digital display and memories. Tx is normally restricted to 144-146MHz.

For the scanner owner, how about a wide-band aerial that covers 500kHz-1500MHz. The base station version is encapsulated in fibre glass. Even more exciting is the mobile version! This will come complete with cigar lighter adaptor and fits the standard SO239 mobile mount.

And finally a new 2 metre rig with a big difference. This one comes with a receive coverage of 118-170MHz. Ok you are saying who wants FM between 118 and 136MHz? The answer, nobody! That's why this rig comes with an AM detector. How much does it cost? A lot less than many 2 metre mobiles. More details as soon as we have checked it out.

RETAIL & MAIL ORDER:- 18-20, Main Road, Hockley, Essex SS5 4QS.

Tel: (0702) 206835, 204965

RETAIL ONLY:- 12, North Street, Hornchurch, Essex RM11 1QX.

Tel: (04024) 44765

Visa and Access by telephone. 24hr. Answerphone.

WATERS & STANTON

Crops and Coils Part 1

How It All Began

The 1930's were difficult times for farmers. Cheap imported food threatened their livelihood and, if this were not enough, their problems were then compounded by the general strike. Rumours were rife, causing great confusion. Newspapers were limited to a single small page. Indeed, the traditional communications systems were virtually out of operation. But, there was a new way to disseminate vital information. That was by "wireless", George Pickworth tells the story.

My grandfather was a farmer, and I can just remember him straining to hear the feeble sounds emanating from the trumpet loudspeaker. He was listening for vital information about prices and transport services that might still be operating, as he needed to get perishable products to the market. Little did he realise that one day, I too would rely on radio broadcasts for news and information. That came in 1948 when I began my career as an agricultural advisor in very remote parts of Africa. By then, I was the proud owner of an Eddystone 358 communications receiver.

My interest in radio and affinity for the magnificent communications receivers of that era, started when I rediscovered grandfather's old receiver in the attic and managed to get it working again. Like many receivers of the early 1920's vintage, the components were precision made with instrument quality controls. They were mounted on an ebonite panel that sat horizontally on top of the cabinet.

The tuning control and the two valves were on the upperside, the other components were underneath. It used a triode regenerative detector, transformer coupled to a triode output stage feeding a high impedance trumpet loudspeaker. A massive 6 volt accumulator provided power for valve heaters, while a dry battery supplied the anodes with 120 volts.

Regeneration

Regeneration had just been invented by Major Armstrong when grandfather's first valved set was made. It followed the original design by having a "tickler coil" mounted on a hinged bracket. The technique was to first tune-in to a station, then swing this coil towards the tuning coil, so that regeneration (positive feed-back) brought the detector valve almost to the point of oscillation. This dramatically increased the sensitivity of the detector, but the two controls had to be operated in unison. This required considerable expertise to avoid actual oscillation and interference with other receivers in the vicinity. Indeed, inexpert operators caused so much interference, that it became compulsory for later genera-

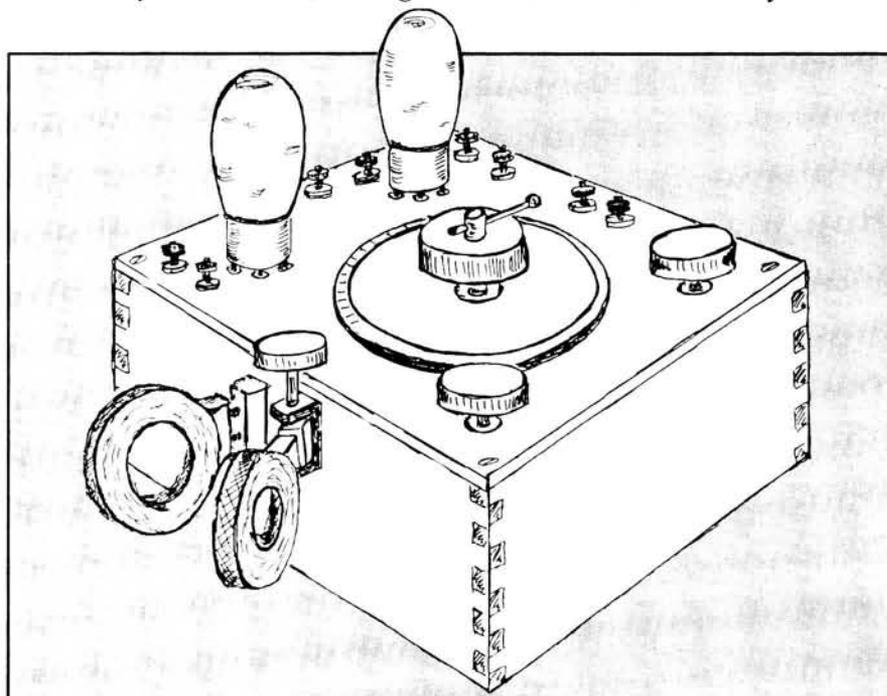


Fig. 1.1: Grandfather's first valved radio receiver, circa 1925, using valves with 6 volt heaters.

tions of commercially built receivers to have regeneration limited to a point well below oscillation, and to carry a sticker to say they were "Approved".

By the mid 1930's, valves had been developed to give a useful gain at the lower radio frequencies, so highly sensitive regenerative detectors were no longer necessary for reception on the long and medium waves.

This gave designers the opportunity to develop detectors able to reproduce the high audio quality of the BBC broadcasts. A good example of such techniques was a bandpass r.f. stage followed by an infinite impedance detector. This gave just about the "ultimate" in sound quality.

Short waves

Now that commercially-made long and medium wave receivers dominated the domestic scene, and that generation of experimenters who had pioneered with early receivers had either become radio amateurs, or developed other interests, my generation of experimenters was taking a great interest in

the short waves. But that required a special kind of receiver.

Valves which gave adequate gain at the lower radio frequencies were almost useless at the higher frequencies, so receivers which depended largely on r.f. amplification were unsuitable for short wave reception. On the other hand, superheterodyne receivers, which achieved most of their gain at a low intermediate frequency, were basically suitable for short wave reception, but specialised commercial short wave receivers were not generally available. And only a few of those were superheterodynes.

However, domestic superheterodyne receivers were already available in the mid 1930's and many provided for short wave reception. But they had their drawbacks both for domestic use and for short wave listening.

Many complained that audio quality was inferior to "straight" receivers, while the inability of ordinary domestic receivers to resolve c.w. transmissions, and the problem "images", limited their appeal for short wave reception. Then there was the formida-

ble problem of resolution when covering a band some twenty times wider than the medium wave band.

As far as young experimenters were concerned, the limitations of the superheterodyne were academic. They had already discovered that the regenerative detector provided a far simpler, and infinitely less expensive way to explore the short waves. It had none of the problems inherent to a superheterodyne, nor did it generate signals which bedevil some modern designs.

The regenerative detector had a theoretical gain approaching a million, and gave an audio output directly from either a.m. or c.w. transmissions, right up to the very highest frequencies in use, managing all this in a single stage consisting of a valve and half a dozen other components. However, it was a highly critical device and in order to utilise its tremendous potential, it had to be "tamed".

This was an empirical exercise in which young experimenters excelled. The slightest change in the position of a component, the value of a resistor or condenser (or capacitor, as we call them now) could make all the difference between a good receiver and a superb one. My favourite design used a 6J7 pentode, with a variable resistor to control the voltage on its screen grid.

When compared with my modern transistorised receiver, I am convinced that many devices did approach the ultimate. But, whereas a modern receiver is easy to use, it required great skill to operate a simple regenerative receiver. I can think of no greater challenge to young experimenters today, than to build an operate a replica of those valved short wave receivers.

RF stages were generally avoided, until valves that gave a useful gain at the higher frequencies became available. Even then, not all constructors were convinced of their value. However, some did believe that one was warranted simply to isolate the antenna from the detector. Indeed, the loading effect of the antenna was a serious problem with regenerative receivers.

Experimenters evolved a simple method of describing their receivers. Each r.f. stage was indicated by a number, followed by a V which indicated the detector. This was followed by additional numbers to indicate the audio stages. For example, a simple receiver consisting of a detector, followed by a single audio stage was called a 0V1 receiver.

Notwithstanding the superheterodyne, the 0V1 became the classic short wave receiver, favoured not only by amateurs, but by ships' radio operators almost to the beginning of World War II.

Conversion

One of the first refinements in regeneration had been to replace the swinging coil with a fixed coil, and to control feedback with a variable condenser. Most "bread board" domestic receivers, made in their thousands by an earlier generation of constructors used this method, and some were still in use as late as 1934. They were readily available and prized by young enthusiasts as they were ideal for experiments. Many were suitable for conversion into simple short wave receivers.

The components had screw terminals, so the only essential tools were a pair of pliers, a screw driver, a few drills and a Bradawl to make pilot holes in the baseboard. Furthermore, they were designed for battery operation which was an advantage to young experimenters. Power supply was not a problem as most domestic receivers still used 2 volt accumulators and 120 volt dry batteries. All-mains sets were still "up-market".

Conversion of "bread board" receiver into short wave receiver meant reducing the capacity of the tuning and regeneration condensers (by removing half the vanes), and winding a new tuning coil to suit a required segment of the band, then wherever possible, by adapting the original former. However, it was more difficult to make a suitable r.f. choke.

It was usually necessary to replace the traditional ebonite panel with metal, to prevent hand-capacity from upsetting the tuning. However, a notable exception was the famous Eddystone

short wave receiver, which minimised stray capacitance by using a glass panel.

Nonetheless, with careful layout and a metal panel, the upper frequency limit was determined mainly by the valve. It was not difficult to select valves that would work at frequencies as high as 20MHz.

Construction

My first short wave receiver had a panel made of plywood backed with tinfoil. Holes for the tuning condenser and reaction control, were made with a red hot poker. The detector valve, a PM1HF was a transformer coupled to a PM1LF output stage. Simple as it was, sensitivity was sufficient to bring in a number of American stations. By using additional plug-in coils, such receivers would operate satisfactorily down to the long waves, provided that the restricted band coverage (caused by the reduced capacity of the tuning condenser) was acceptable.

As better valves became available, I progressed to superheterodynes and other complex equipment. Components made especially for amateurs and short wave experimenters were used. Construction became a real engineering job. We relied on sound mechanical principles to give stability and reset accuracy. Precision dials were by far the most expensive components.

Construction of these complex receivers gave me great satisfaction. Indeed, as I found during my own career, even if one is orientated towards science, those who also have the gift to use their hands are the most fortunate.

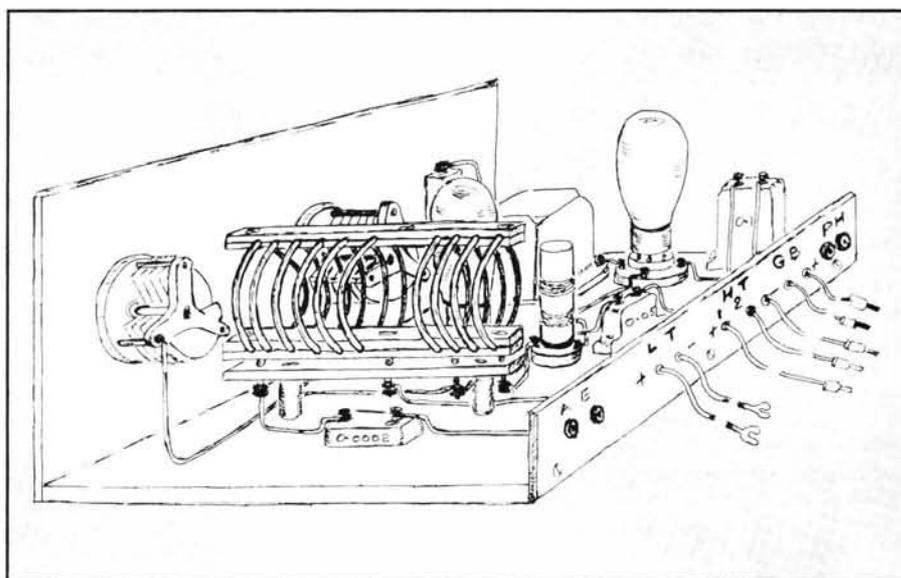


Fig. 1.2: A short wave receiver made by the author in 1935 using the "bread board" design. The valves had 2 volt heaters and together with other components were salvaged from old domestic radios, and the plug-in tuning coils were home made.

In Part 2, George Pickworth continues his tale of a schoolboy Radio Experimenter in the late 1930s

Apartment HF TX Antennas

Part 2

In this, the second part of an article by Richard Q Marris, we'll look at some practical antenna designs. Many of the antennas described have been tried and tested under various circumstances and in most cases have worked very well.

The dipole is probably the best known and most used antenna. It is a half-wavelength long, is centre fed, and has relatively low feed impedance. The basic configuration is shown in Fig. 2.1a. Alongside this is the generally accepted formula to find the length in relation to frequency, always assuming that the dipole is in the clear.

The r.f. voltage reaches a minimum at the centre, and is highest at the extreme ends. Conversely the maximum current is at the centre, and minimum at the ends. For practical purposes it can be assumed that the middle quarter wavelength produces the maximum radiation.

Approximate lengths for h.f. amateur band $\lambda/2$ dipoles are:

28MHz	= 5.11 metres
24MHz	= 5.96 metres
21MHz	= 6.81 metres
18MHz	= 7.94 metres
14MHz	= 10.21 metres
10MHz	= 14.3 metres
7MHz	= 20.43 metres
3.5MHz	= 40.86 metres

In practice, the length should be calculated from the formula in Fig. 2.1a, plus about 10 percent, so the antenna can be pruned back for resonance.

When it comes to "indoor" and "in-room" dipoles, additional factors must be taken into account. Being in a confined space, the surroundings (i.e. capacitance) will confuse the length required. Furthermore, if the dipole is bent then this invariably reduces the overall electrical length. This means that the physical length will have to be increased by an amount only determined by experiment. In addition both factors may well alter the feed impedance and some sort of matching (e.g. a balun) should be used.

The only bands on which an "in-room" dipole could be practically used are 28MHz, 24MHz and 21MHz; maybe by bending and end loading 18MHz and 14MHz. It all depends on the individual circumstances which will be different for every QTH.

The best idea is to erect the dipole diagonally across the room, from opposite corners, and at least 150mm below the ceiling level. The big snag

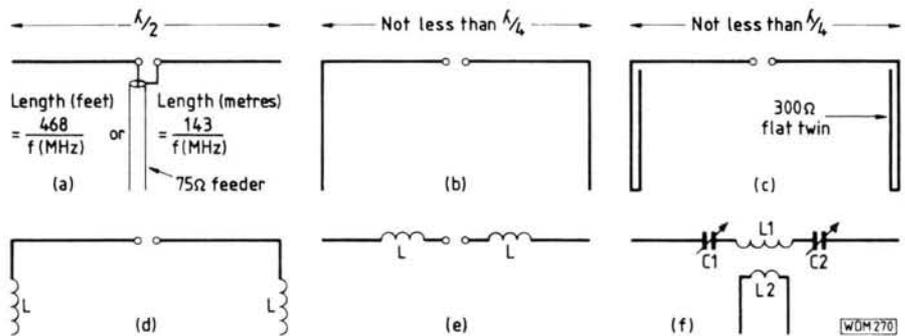


Fig. 2.1

about this, with a dipole, is the feedline drops down in the centre of the room. This problem can be overcome by making the feedline detachable, so when the antenna is not in use it can be easily disconnected.

The dipole in Fig. 2.1b has its ends dropped down, however the horizontal part should be at least a quarter wavelength long i.e. approximately 2.6 metres on 28MHz; 3.4 metres on 21MHz and 5.1 metres on 14MHz. If the ends are physically too long to accommodate, then they can be end-loaded with inductors (see Fig. 2.1d). These should be wound in the same gauge wire as the antenna.

Another method of end loading is shown in Fig. 2.1c where the ends are loaded with 300 Ω flat twin feedline. It's rather tedious to adjust, but it works well. All the dipoles shown in Fig. 2.1a-d have worked successfully on the 14MHz, 21MHz and 28MHz bands. The inductance loaded dipole in Fig. 2.1e can be found in the *ARRL Antenna Book*, complete with the necessary lengths and inductance tables. The value of the inductors (L) depends on the length of the antenna and the position of the inductors in that length.

A practical antenna for the 14MHz band is one designed by K2EEE that appeared in *CQ* in the early 1960s, and is reproduced in Pat Hawker's *Amateur Radio Techniques*. This antenna is 4.88 metres long and could quite easily be reduced to manageable "in-room" dimensions by using sectional or telescopic elements, allowing easy

storage and erection. A similar device, using telescopic elements, has in the past been tried on 21MHz by the author, with some success.

The loaded/tuned dipole shown in Fig. 2.1f, appeared many years ago in an ARRL publication.

The inductors give the effect of overlengthening a much shortened dipole, and the series variable capacitors C1 and C2, tune the dipole to resonance. The low impedance feedline is coupled to the dipole's centre inductor (L1), via L2. The dipole version of this antenna has not been tried, but the most obvious and useful improvement to the design would be the ganging together, with an insulated shaft, of the two tuning capacitors. It might form the basis of a 7MHz antenna, using very restricted element lengths of under 6.1 metres. There seems room for some experiment here.

Strange Antennas

Though this article is basically concerned with "in-room" transmitting antennas, it is possible just once in a while to initiate an outside antenna through devious means. Here are two examples, both of which have been used in the past with some success.

The antenna shown in Fig. 2.2 is the result of being given an old fishing rod. The rod was made of cane, in 3 one metre sections, each joined to the other with a brass ferrule. This rod seemed to have good potential for a clandestine antenna which, when broken down,

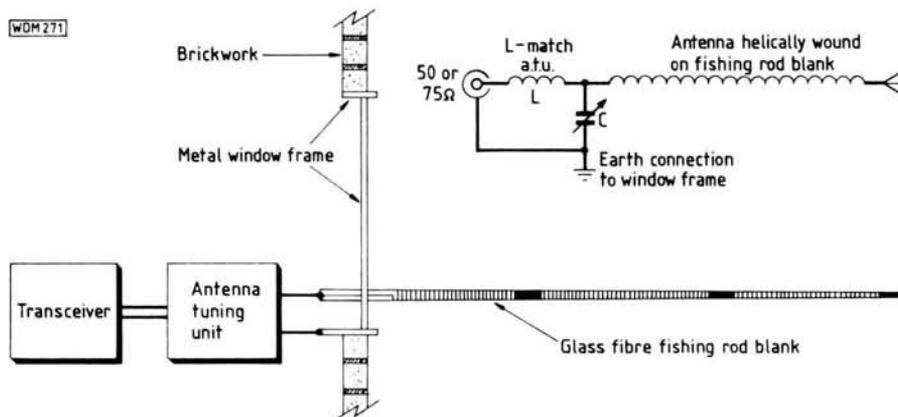


Fig. 2.2: One of the author's "strange" antennas

would only measure approximately a metre; with the added advantage of quick and easy assembly.

The preparation of the rod for use as an antenna includes the removal of all the fittings except the handle and ferrules, then the whole thing was rubbed down with glass paper.

It was decided to use the rod as the basis of a 14MHz band 0.28λ helical wound antenna, and the resultant design can be seen in Fig. 2.2.

The 0.28λ antenna was chosen in favour of the 0.25λ version because of its higher feed impedance, consequently it's easier to load-up. For an electrical wavelength of 0.28λ , it is generally accepted that it is necessary to wind on about 0.56λ of wire. Err on the generous side and prune back if necessary. The winding was made of black pvc covered wire, with turns evenly spaced apart over each section of the rod. The wire was terminated at the end of each section by soldering to the brass ferrules.

The final three-section helical antenna including its mount, were given a coat of black marine varnish. A simple mount was devised to clamp the antenna, at 90 degrees, to the metal frame of a slightly opened window through which the antenna was poked. The window in this case was only 7 metres above ground level.

The transmitter was matched to the antenna via an "L-match" a.t.u. This arrangement can be seen in Fig. 2.2. The "L-match" was earthed to the metal window frame with a large jump lead type crocodile clip, this formed the groundplane; or whatever the antenna is loaded against! During the hours of darkness, this antenna was installed horizontally through the window, invisible from the ground; yet still capable of working DX using low power c.w.

An updated version of this antenna could be built on a glass reinforced plastics fishing rod blank, available from most fishing tackle shops, including ferrules. *Caution: check with the retailer as to the composition of the fishing rod blank, as some modern rods contain carbon fibre, which make them unsuitable for this type of project. Ed.*

A suitable QRP "L-match" a.t.u. with built in v.s.w.r. meter, appears in

the *PW* reprint *Introducing QRP*. This design could quite easily be up-graded to take much higher powers, remember though, more power, more TVI!

The Phoney Antenna

If you live in a private dwelling that has its own domestic TV and f.m. antenna system, but because of local planning regulations amateur antennas are not tolerated, you could be in luck. Why not get another TV antenna installed and use its coaxial down-lead as an end-fed long wire antenna? After all two TV antennas pointing in different directions are a status symbol, just like two cars!

The phoney TV antenna (Fig. 2.3) should be mounted as high as possible and the coaxial cable run down to the radio shack. At the antenna end of the coaxial cable, it is necessary to insulate the cable from the actual antenna terminations. The author used about 300mm of strong dark nylon rope to achieve this; the join being invisible from the ground.

The other alternative is ask your local "aerial" rigger to install the TV antenna; when he comes, just ask him to run the coaxial cable into the termination box of the antenna, but not to connect it. This may cause a few raised eyebrows, but instruct him to just tape up the end of the cable in such a fashion as to stop it becoming physically detached from the antenna. At the shack end of the coaxial cable, connect the inner and outer conductors together and then to the transceiver via an L-match a.t.u. and an s.w.r. meter.

The earth installation for this antenna can be either, if the shack is on the ground floor, an external earth

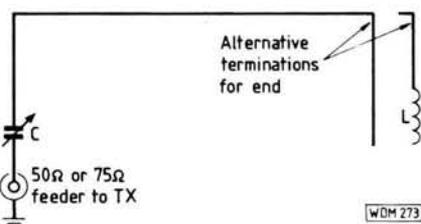


Fig. 2.4: The $\lambda/3$ antenna, successfully used by the author on Top Band

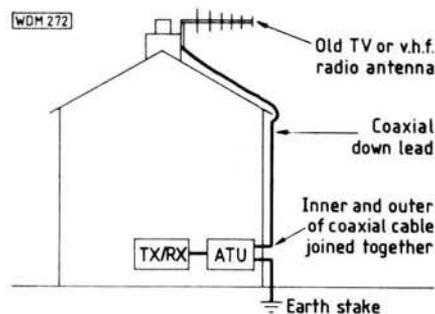


Fig. 2.3: The "phoney" TV antenna that can get around local regulations

spike, or a heavy wire gauge connection to the building's radiator or cold water system. Never use mains earth or pipes connected to gas utilities.

The new TV antenna is phoney, but its coaxial feeder when used in conjunction with the "L-match" a.t.u. and a good earth system, is capable of excellent results on both the 14MHz and 3.5MHz bands, even with low power c.w.

End Fed $\lambda/3$ Antennas

This type of antenna has been used successfully by the author on all h.f. bands including Top Band. It usually appears as a vertical fed against a groundplane, but in the configuration shown in Fig. 2.4 it has proved to be a very good "in-room" antenna for both the 21MHz and 14MHz bands.

If this antenna is made 0.28λ long then, in theory, the feed impedance should be approximately 50Ω . This figure will increase to about 75Ω if its length is nearer 0.32λ . The reactive component can be tuned out with a series capacitor. If this type of arrangement is used, either a 50Ω or 75Ω coaxial feedline may be used, effectively eliminating the need for an a.t.u. Unfortunately, this only holds true if your transceiver output has a pi-network tuning system. The type of series capacitors used by the author have usually been good quality variables, with a value of around 60 to 100pF , either will do for the 14MHz and 21MHz bands.

Usually, a long wire or helical earth counterpoise has been used with this antenna. On occasions, when the transceiver was near a metal framed window, this was used as the earth; all have been successful.

The antenna is made from a length of pvc covered flexible wire, slung diagonally across the room. The horizontal part of the antenna is stretched absolutely straight, and at least 150mm below the ceiling. Assuming that there is about 1.2 metres drop down to the transceiver, then it is likely that you may have some antenna wire over at the far end, in which case this may be allowed to drop down a metre or so. On 14MHz it may be necessary to add an

end loading inductor, see Fig. 2.6.

Using the illustrated configuration of this antenna the maximum r.f. current point conveniently appears along its horizontal section. This, combined with its low feed impedance and not too critical earth requirements, makes it a most useful antenna for the 14MHz, 21MHz and, no doubt, 28MHz bands.

Useful ATU

The a.t.u. shown in Fig. 2.5 is a necessary requirement for most of the end fed antennas mentioned in this article, with the possible exception of the antenna just described. The "L-match" is very simple to build and easy to operate, it will match just about any old length of wire to 50 or 75Ω feeder. The most crucial part of the "L-match" design is the LC or CL ratio, once this has been found, all will be well. The other important point to note about this a.t.u., is that it must be built in a screened box.

The a.t.u. shown in Fig. 2.5a is the most commonly used configuration. The "L-match" a.t.u. is fully documented, with designs in most amateur text books. (*Try reading Chapter 8 of Simple, Low-cost Wire Antennas by Orr and Cowan, Ed.*) However, most designs that appear show inductor (L) having switched or continuously variable, roller-coaster style tappings, so they can be used on more than one band.

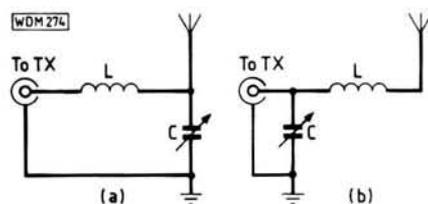


Fig. 2.5: The "L-match" antenna tuning unit

The trouble with such tappings is that, after a while, these go high resistance, etc., with resulting losses of r.f. This probably wouldn't even be noticed with a 50 watt transmitter and outdoor antenna. But with an "in-room" antenna and low power, such losses can have a significant effect on one's DX capabilities.

A conventional tapped "L-match" a.t.u. is used for initial experiments, with a new antenna design, but after that a separate a.t.u. is used for each band. These should have untapped inductors and high quality variable air-spaced capacitor. The philosophy behind this is, if you can save a few losses here in the system, and few losses there, then there may well be an odd watt or two extra available to be radiated to the world outside. After all, every little helps!

L-match and End Fed

A typical example of an "in-room" antenna suitable for use on 1.8MHz, 3.5MHz, 7MHz, and possibly 14MHz, is shown in Fig. 2.6. It consists of the longest possible straight horizontal wire, slung diagonally across the room, with maybe 1.2 metres of wire dropped down to the "L-match" a.t.u. The wire has a loading coil at the far end, (L). The pvc covered flex should be at least 150mm below ceiling level and suspended either end with at least 300mm of nylon fishing line.

It should be noted that there is another optional loading coil, (La), shown between the antenna and a.t.u. This should not be needed with the possible exception of Top Band. The target for such an antenna is to get the high r.f. current located in the horizontal wire. The high r.f. voltage position

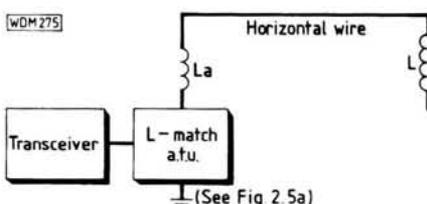


Fig. 2.6: A typical example of an "in-room" antenna suitable for 1.8, 3.5 and 7MHz

should, as far as possible, be towards the bottom of the loading coil (L) at the far end of the antenna.

The best idea seems to be to aim at an electrical length of 0.28λ . This is made up of the drop down section combined with the horizontal section and loading coil (L), together with the a.t.u. as shown in Fig. 2.5a. This means that the amount by which the wire falls short of 0.28λ must be made-up for in L. The inductor (L) should consist of the same pvc covered flex as used for the antenna, wound around a dowel or plastics tube of at least 16mm diameter, with turns slightly spaced. Obviously the larger the electrical size of L, then the longer the tube or dowell will need to be.

A rule of thumb method is to put on twice as much wire as would be needed as if it were straight. For example, if you have calculated an extra 4.6 metres of wire needs to be added to the horizontal wire, but there's no room to physically accommodate it, then you make L using 9.2 metres of wire.

In effect, L is a helical portion of the antenna. In the case of 3.5MHz and Top Band, L would be a couple of metres long, and at least half would form part of the radiating section of the antenna. If insoluble loading difficulties should occur, then try inserting a small coil (La) made up from the same type of flex used on the antenna. The author once found this necessary with a Top Band version of this antenna, to lift the end impedance a little, due to a poor earth system.

Earths and Things

In an apartment or flat, it is nearly impossible to use an external earth or ground, especially if you are on the first floor and above. On 3.5MHz and Top Band the author uses about 4.6 metres of heavy cable to connect the a.t.u. earth point to a cold water pipe. This works fine, but if you intend using this method of earthing, do ensure that the water pipe is metal and not plastics. Also, as mentioned earlier, only use pipes carrying water and not gas, if the latter were used you could be responsible for a very large explosion. Ed.

In addition, under no circumstances rely on the mains earth as the r.f. earth—it is necessary of course to connect the transmitter's mains safety earth.

Unfortunately 4.6 metres of wire connected to a water pipe, is not satisfactory as an r.f. earth on frequencies above 14MHz. This is because the wire represents a significant length when compared with the dimensions of the antenna. For example it is just under a $\lambda/4$ on 14MHz.

The Helical Earth

By far the best r.f. earth for the 14MHz and 21MHz bands has to be the "helical earth" or counterpoise. It's a $\lambda/4$ device, and consists of a $\lambda/2$ wire space-wound over a dowel or plastics tube of at least 1.8 metres long.

Contrary to expectation this helical earth should not be laid on the floor, but supported at least 300mm above floor level. Also, pointing the helical earth in various directions should be tried. There is a wrong and right direction, and it can only be found by trial and error. The wrong direction and position is where it picks up electrical interference, and/or the antenna will not load, and/or causes TVI, or a combination of all three.

The right direction and position is where the antenna radiates efficiently; there is little or no TVI and the least noisy receive situation.

On 28MHz it is easy to use a full size $\lambda/4$ wire counterpoise, but here again various positions should be tried. Anyway you may well be using a dipole on this band.

Another good earth as mentioned earlier in this article is the metal window frame. This has been found by the author over a period of time, to be particularly good for antenna systems working on the 3.5MHz and 14MHz bands.

In the third and final part of this series details will be given for "In-room" loop antennas.



Bredhurst electronics



SITUATED AT SOUTHERN END OF M23 — EASY ACCESS TO M25 AND SOUTH LONDON

HF RECEIVERS	£	(c&p)
Icom ICR71	825.00	(—)
Kenwood R2000	595.00	(—)
Kenwood VC10 V.H.F. Converter	161.94	(2.00)
Kenwood R5000	875.00	(—)
Yaesu FRG8800	639.00	(—)
Yaesu FRV8800 V.H.F. Converter	100.00	(2.00)
Low HF125	375.00	(—)

HF TRANSCEIVERS	£	(c&p)
Kenwood TS940S	1995.00	(—)
Kenwood TS930S	1695.00	(—)
Kenwood TS440S	1138.81	(—)
Kenwood TS140S	862.00	(—)
Yaesu FT980	1785.00	(—)
Yaesu FT757GXII	969.00	(—)
Yaesu FT767GX	1550.00	(—)
Yaesu FT747GX	659.00	(—)
Icom IC735	949.00	(—)
Icom IC751A	1465.00	(—)

V.H.F. SCANNING RECEIVERS	£	(c&p)
Icom ICR7000	957.00	(—)
Yaesu FRG9600M 60-950MHz	509.00	(—)
A.O.R. AR2002	487.30	(—)
Signal R535 "Airband"	249.00	(—)
Sony Air 7 handheld	249.00	(—)
Sony PRO 80 New Sony Receiver	349.00	(—)
WIN 108 Airband Receiver	175.00	(2.00)

V.H.F. SCANNER ACCESSORIES	£	(c&p)
A.K.D. HFCT1 HF Converter	49.00	(1.00)
Revcone Disccone Antenna 30-500MHz	32.16	(3.00)
Icom AH7000 Antenna 25-1300MHz	82.00	(3.00)

ANTENNA TUNER UNITS	£	(c&p)
Yaesu FRT7700 Short wave listening	59.00	(2.00)
Yaesu FC757AT	349.00	(—)
Kenwood AT230	208.67	(2.50)
Kenwood AT250 auto	366.00	(—)

2.M. TRANSCEIVERS	£	(c&p)
Kenwood TH21E Handheld	189.00	(—)
Kenwood TR751E 25W multimode	599.00	(—)
Kenwood TS711E base station	898.00	(—)
Kenwood TH205E Handheld	215.26	(—)
Kenwood TH215E Handheld	252.13	(—)
Kenwood TW41000E 2m/70cm FM Mobile	499.00	(—)
Kenwood TM221ES 45W Mobile	317.00	(—)
Kenwood TH25E Handheld	258.00	(—)
Yaesu FT290II Portable multimode	429.00	(—)
Yaesu FT23R + FNB10 Handheld	255.70	(—)
Yaesu FT736R Multimode VHF/UHF Base complete with 2m, 70cm and duplex	1450.00	(—)

Icom IC2E Handheld	225.00	(—)
Icom IC02E Handheld	299.00	(—)
Icom IC28E 25W mobile	359.00	(—)
Icom IC275E base station inc PSU	1039.00	(—)
Icom IC3200E 2m/70cm FM mobile	556.00	(—)
Icom IC Micro II Handheld	239.00	(—)

70cm TRANSCEIVERS	£	(c&p)
Kenwood TH41E Handheld	218.00	(—)
Kenwood TS811E base station	998.00	(—)
Kenwood TH405E Handheld	273.18	(—)
Kenwood TH415E Handheld	298.85	(—)
Kenwood TM421ES 35W Mobile	352.84	(—)
Yaesu FT73R + FNB10 Handheld	275.70	(—)
Icom IC4E Handheld	285.00	(—)
Icom IC04E Handheld	299.00	(—)
Icom IC451E base station inc PSU	1125.00	(—)
Icom IC Micro 4 Handheld	279.00	(—)

STATION ACCESSORIES	£	(c&p)
MC 50 Desk Microphone	46.08	(2.00)
MC 60A Desk Microphone with Pre-amp	88.22	(2.00)
MC 55 Mobile Microphone with Control Box	52.67	(1.00)
MC 35S Hand Microphone 4 pin	21.72	(1.00)
MC 43S Up/down Hand Microphone 8 pin	22.22	(1.00)
MD188 Base Microphone	79.00	(2.00)
LF 30A Low Pass Filter 1kW	32.2f	(2.00)
SP 40 Mobile Speaker	21.0f	(1.00)
HS 7 Miniature Headphones	15.80	(1.00)
YH 77 Light Deluxe Headphones	19.99	(1.00)
MC 43S Deluxe Headphones	37.54	(1.00)
CS 100 Mobile Speaker	13.50	(1.00)
VS 1 Voice Synthesizer Module	32.26	(1.00)
VS 2 Voice Synthesizer Module	32.26	(1.00)
GC5 Icom World Clock	43.00	(2.00)
LD600 CW/RTTY Decoder	215.14	(2.50)
KPC2 Kantronics Packet Communicator	159.00	(2.50)
Kent Morse Key Kits	23.50	(2.50)
Kent Twin-Paddle Morse Key Kits	38.50	(2.50)

ANTENNA BITS	£	(c&p)
HI-Q Balun 1:1 5kW P.E.P.	13.95	(1.50)
Bricommm Balun 4:1 1KW	13.80	(1.50)
Bricommm 7.1MHz Epoxy Traps (pair)	10.95	(1.50)
Self Amalgamating Tape 10m x 25mm	4.25	(0.75)
T-piece polyprop Dipole centre	1.60	(0.25)
Small ceramic egg insulators	0.65	(0.20)
Large ceramic egg insulators	0.85	(0.20)

CABLES ETC.	£	(c&p)
URM67 low loss coax 50 ohm	per metre	0.75 (0.25)
UR76 50 ohm coax dia. 5mm	per metre	0.30 (0.10)
UR70 70 ohm coax	per metre	0.35 (0.10)
UR95 50 ohm coax dia. 2.3mm	per metre	0.40 (0.10)
4mm Polyester Guy Rope (400kg)	per metre	0.25 (0.10)
50mtrs. 16 swg hard drawn copper wire	per metre	6.95 (1.50)
75ohm Twin feeder light dut	per metre	0.20 (0.10)
300ohm Slotted ribbon cable	per metre	0.32 (0.10)

SPECIAL OFFER
A free ICOM AH7000 wide band antenna with every ICOM ICR7000 receiver sold (offer ends 31.8.88).

GOODS NORMALLY DESPATCHED WITHIN 24 HRS - PRICES CORRECT AT TIME OF GOING TO PRESS - E&OE - MAIL ORDER AND RETAIL

BREDHURST ELECTRONICS LTD HIGH ST, HANDCROSS, W. SX. RH17 6BW (0444) 400786

Siskin Electronics

The RF Data Communication Specialists

PACKET RADIO



Pac-Comm

TNC-220 Dual port (HF/VHF) very popular	£Phone
TINY-2 Single port VHF TNC. Great Value	£109.95
Micro-2 Low power (40mA) TNC. high spec	£159.00

Kantronics

KPC-2 VHF/HF TNC, WEFAX and PBBS inc.	£159.90
KAM Packet/CW/RTTY/Ascii/Amtor/WEFAX, KA-NODE and PBBS inc.	£265.00

AEA

PK-88 Low price TNC from AEA	£109.95
PK-232 Packet/Ascii/CW/Amtor/RTTY/WEFAX and NAVTEX!	£269.95

Software

Please contact us to discuss your software needs.

Phone: 0703-849962
Or Cellnet (0860) 616770



P.O. Box 32,
Hythe, Southampton,
SO4 6WQ England.
FAX: 04893-5081
CELLNET: 0860 616770

DATONG ELECTRONICS LIMITED

AUDIO FILTERS MODELS FL2, FL3, FL2/A

Model FL3 represents the ultimate in audio filters for SSB and CW. Connected in series with the loudspeaker, it gives variable extra clarity factor to the whole bank of superior crystal filters. In addition it contains an automatic notch filter which can remove a "unwanted" ally by itself. Model FL2 is exactly the same but without the auto notch. Any station or news FL2 can be upgraded to an FL3 by adding Model FL2/A conversion kit. This is a standard alone auto-notch unit. Datong filters frequently allow continued copy when other ones (25%) would have to be terminated.

FL2 £89.70 FL3 £129.37 FL2A £39.67

ACTIVE RECEIVING ANTENNAS

Datong active antennas are ideal for modern broadband communications receivers - especially when space is limited.

- Highly sensitive (0.1 parasitic to full-size dipole)
- Or omnidirectional coverage (below 20MHz to over 30MHz)
- Works for tuning, matching or other adjustments.
- Two versions AD270 for indoor mounting or AD370 (illustrated) for outdoor use.
- Very compact, only 3 metres over all height.
- Professional performance standards.
- Includes maintenance program.

AD270 £51.75 AD370 £69.00

MORSE TUTOR


The uniquely effective method of improving and maintaining Morse Code proficiency. Effectiveness proven by thousands of users world-wide.

- Practice anywhere, anytime at your convenience.
- Generate a random stream of perfect Morse code characters.
- DT2's unique "EFT" control allows you to select character with or without high-speed sound. Start with long delay between each character and as you improve reduce the delay. The speed with which character always remains as set on the independent "SPEED" control.

Features: single battery operation, compact size, built-in loudspeaker plus personal earpiece.
£56.35

Our full catalogue plus further details of any product are available free on request. Dealers in most countries, please send for list.


Credit cards accepted.
Goods normally despatched within 3 days subject to availability. All prices include V.A.T. P+P.



Datong Electronics Limited, Department PW, Clayton Wood Close, West Park, LEEDS, LS16 6OE
Tel: (0532) 744822 (2 lines)

Communic

The largest international exhibition of ever held in Britain took place at the National Exhibition Centre from 10-13 May. This biennial event is massive in all types of professional communication. Exhibited are of interest to the amateur, he saw there.

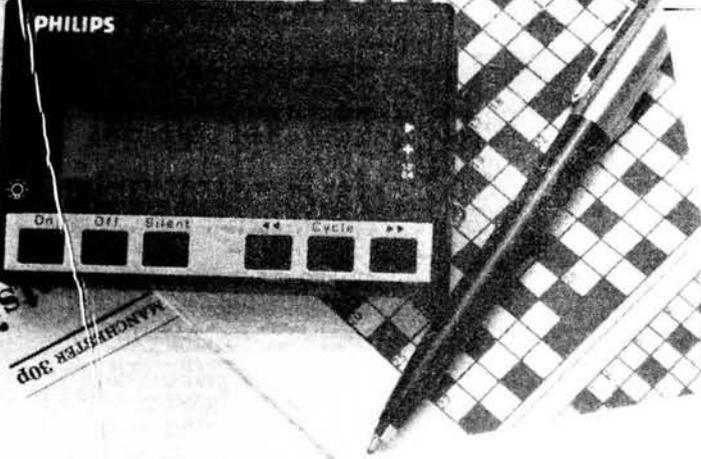

Philips alpha-numeric pager with 16-digit l.c.d., 9 memories and 512-character capacity

Over 450 exhibitors, including more than 70 from overseas, showed products ranging from new types of i.c.s for telecommunications to all types of data communications products, and from satellite and other antennas to mobile stations.

The emphasis seemed to be towards office communications equipment, for which there is a very extensive market, including tiny pocket pagers and a wide range of voice, text, data and image transmission systems for all types of user. A series of simultaneous seminars was given by people from various branches of the communications industry in an adjacent hotel.

Microwave Links

In these days of technological information gathering, microwave traffic can become extremely dense at frequencies below 13GHz. The Nippon Electric Company (NEC) of Japan demonstrated a "Pasolink 50" single-channel video link operating at 50GHz for the transmission of image, video, voice, facsimile or data with a minimum of interference. The transmitted power was 15mW. A range of at least 7km (typically 10km) was claimed with data rates of 2 or 8Mbit/s (megabits per second). A 25mm diameter conical horn antenna can be used to provide a 20dB gain and a 17° beamwidth, while a 300mm Cassegrain reflector will provide a gain of 40dB and a beamwidth of 1.5°. Modulation was f.m. (f.s.k.). A similar "Pasolink 23" operating at 23GHz can transmit at a data rate of 8Mbit/s over a distance of 15km with a bandwidth of 5.3MHz.

Short-haul microwave radio systems were also introduced by DMC Telecom UK Ltd of East Kilbride, Scotland, for use at 18GHz (four 2Mbit/s digital signals) and 23GHz (sixteen 2Mbit/s digital signals). These systems include built-in multiplexers. For the moment they will be manufactured by Digital Microwave Corporation in the USA, but DMC Telecom UK will produce them later.

Devices and Circuits

The Electronic Components Group of Siemens claimed to have one of the widest ranges of telecommunications i.c.s on the market, including ISDN (Integrated Systems Digital Network) basic (144kbit/s) and primary (2.048 and 1.544Mbit/s) access. Recently, the Group introduced a user board that allows IBM or IBM-compatible personal computers to access the integrated services network.

Highlighted on the Advanced Micro Devices (AMD) of Woking stand was the first demonstration in Europe of the Am29000 32-bit RISC microprocessor which, it is claimed, can run three to five times faster than any other device currently available on the market. AMD also ran a live demonstration of its ISDN product with a video link which uses a camera, monitor and two closed circuit television systems to transfer video images over standard telephone lines.

Dale Electronics of Camberley gave details of amplifiers for d.c. to 2GHz manufactured by Mini-Circuits of New York. These MAR-cascadable amplifiers are a family of silicon bipolar i.c.s fabricated with nitride self-alignment and ion implantation for precise control of doping with passivation for high reliability. Advice on grounding is given in the booklet. Input and output impedances are 50Ω for ease of use. Gains of 11dB at 2GHz, 16dB at 1GHz, and 19dB at 500MHz are available from the MAR-6 amplifier.

In recent years there has been increasing concern over possible hazards encountered by exposure to r.f. and microwave energy. Dale Electronics Ltd showed an r.f. exposure measure-

ment system from the US manufacturer Holaday Industries Inc. The 6-minute averaged value required to meet the ANSI (American National Standards Institute) exposure standard is calculated by the built-in microprocessor and is displayed by an l.c.d. readout which is updated every five seconds. Accurate time-averaged readings can be important for those who climb through the high-field regions of transmitter towers.

Aspen Electronics Ltd of Ruislip gave details of coaxial and waveguide switches for frequency ranges of 0-18GHz and 0-12.4GHz. They are actuated by a 28V d.c. supply. The range includes single-pole, double-throw coaxial switches, transfer coaxial units, and multi-position coaxial switches.

British Telecom had a very large and prestigious stand which included a demonstration of their "Password Electronics" system. This is an integrated on-line data source which combines electronics product descriptions, a supplier directory, up-to-the-minute news and an electronic mail facility. The products can be identified, sourced and ordered—all from within the same system. It avoids the necessity for design engineers to scan through catalogues and publications for new product information. For example, keying in "tantalum capacitor" and "surface mount" will cause data on all such products released in the UK to be displayed on the screen.

British Telecom notified journalists in advance that it would have two Press rooms with staff in attendance, and that complimentary Phonecards



Communications '88

communications equipment and services
International Exhibition Centre near Birmingham
mainly intended to appeal to those involved
in their work, but many of the developments
are new too. Brian Dance reports for PW on what



would be available for journalists from there. Telecom's attempt to promote their Phonocard fell very flat on the second day when their Press rooms were left unattended for a long period, after which they admitted they had no more Phonocards available. All of the normal payphones seemed to have been removed from the Press room, so one limitation of the card phones became very clear. Only journalists who brought their own Phonocards with them could make a call from the Press room at that time!

Communicate Ltd of the Imperial College of Science and Technology Centre, Ascot, believes that major growth is imminent in the local networking of personal computers and that eventually the majority of them will be networked in some form or other. This Company's PROCOM 20+ enables an IBM or IBM-compatible personal computer to operate as a fully featured telex terminal in the background mode without interrupting the routine applications of the computer.

Mobile Communications

Pace Communications Ltd of Southampton showed their new "Landmaster IV" 16-channel, 5W synthesised hand-portable mobile radio. Also on show for the first time was a 6-channel, 25W "Fleetmaster" mobile radio; this will be available from September, initially in high-band and low-band v.h.f., to be followed soon by synthesised multi-channel versions including models for u.h.f. and Band III.

Samleco Communications of Amer-sham has introduced a "Radionote

III" portable messaging terminal for use on Band III. It provides a simple, convenient and efficient way of transmitting and receiving data to and from mobile vehicles equipped with radio-communications equipment. This lightweight system incorporates a 40 column by 2 line l.c.d., and a 40 column by 30 line thermal dot matrix printer designed for mobile use. A message to be transmitted can be typed directly into the keyboard or a previously compiled message can be extracted from the memory and transmitted. There is 32K of operating system memory plus 32K of user memory.

A portable reporter radio link from Wood and Douglas is claimed to fully meet the needs of reporters for all-in-one outside broadcast sound link equipment. The design of this PMRL-030 evolved from consultation with the broadcast industry world-wide; it integrates an extended audio u.h.f. transmitter with a v.h.f. cueing receiver and an "off-air" station monitor. Power is from a sealed lead-acid battery with the option of an external d.c. feed to power the unit and to charge the internal battery.

Air Call Cellular Radio Ltd of Colindale, London, exhibited cellular radio transmission equipment which enables a total office communications system to be operated from within the confines of a car. A user can access a multitude of public and private databases and electronic mail or even gain access to his own computer facilities.

Amongst the more exotic equipment on display was a caesium beam primary frequency standard from Time and Frequency Ltd of Israel. This offers an accuracy of ± 3 parts in 10^{11}

Mezza—
British Telecom's
advanced multi-
user management group product.
©British Telecommunications plc 1985

over the temperature range -28°C to $+65^{\circ}\text{C}$ in magnetic fields of up to 0.2mT (millitesla) or 2 gauss. There is a ± 5 parts in 10^{12} accuracy option within a 0°C to $+50^{\circ}\text{C}$ range. Long-term stability is ± 7 parts in 10^{12} over the life of the caesium beam tube (minimum three years).

In one of the mobile caravans on the adjacent car park, the Radio Communications Division of the Department of Trade and Industry (DTI) discussed their work on the monitoring of the radio frequency spectrum. The DTI monitors frequency channels from the long wave band to the microwave region (at present up to 18GHz). It checks private radio bands (such as those used by taxis, etc.) in order to monitor the usage of each band, making checks on channel congestion, and checking that no organisation is unfairly hogging part of the radio spectrum. The DTI also checks broadcasting station transmissions. In answer to a question about amateur band monitoring, the DTI staff said they normally leave this to the RSGB.

Inmarsat (International Maritime Satellite) currently provides a range of satellite communications facilities and services to nearly 7000 maritime earth stations. This London-based organisation of 54 member nations has eight satellites covering all ocean areas with four other satellites under preparation. In their mobile vehicle, Inmarsat staff said that after moving into the aeronautical field in 1986, they are now entering the land mobile field with smaller "Standard-C" earth stations operating at 600bits/s and weighing under 2.5kg with a tiny antenna. Land-based applications include the provision of emergency transportable communications at times of human disaster or natural catastrophe. A range of two-way messaging and position reporting services for land mobile users is also being developed.

The next Communications exhibition will be from 15 to 18 May 1990.

PW



Far left: Cellular car 'phone

Centre left: PROCOM 20+ telex card for PCs, by Communicate Ltd.

Near left: "Landmaster IV" 16-channel, 5W hand-portable by Pace Communications (UK) Ltd.

Practically Yours

By Glen Ross G8MWR

When testing audio frequency amplifiers and power output stages it is often more convenient and informative to do the tests using a squarewave instead of the more usual sinewave. The squarewave is particularly difficult for the amplifier to handle due to its very fast attack and decay times and also due to the fact that a squarewave by definition contains odd harmonics from the fundamental to infinity. It therefore requires an amplifier with a very wide frequency response and a very fast slew rate to deal with this type of signal.

The Oscillator

Many people have a sinewave oscillator available if in no grander a manner than the single frequency audio output of a cheap signal generator. Even this simple approach will enable you to find out a lot about your amplifier. A far better understanding is, of course, possible if you have a wide range generator available. What we now require is a means of changing the sinewave output of the generator to a squarewave.

Sine to Square

The circuit of a converter is shown in Fig. 1. It uses two BC108 transistors wired up as a modified form of Schmitt trigger with a very rapid switching time. The output from this circuit is a squarewave containing harmonics up to about 50kHz. The capacitor C1 is included to assist a fast switch-on time for Tr1. This component also helps to keep the mark-space ratio reasonably constant at high input frequencies. If the oscillator used to drive the converter has a d.c. voltage superimposed on the output then a 100µF capacitor should be included in the input to the unit.

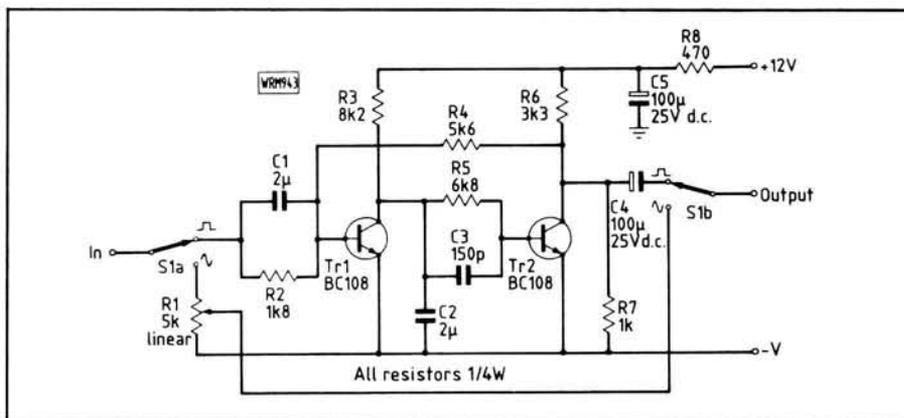


Fig. 1: The circuit of the converter

Output Level

The output level is virtually constant irrespective of frequency and drive voltage, provided this is high enough to get the unit to switch. Because of this, it is easy to arrange a reasonably accurate output attenuator. This is shown in Fig. 2 and enables the variable control to be set to give any output voltage up to the maximum set by the range switch. A suitable scale can be drawn for this control; simply remember that an output voltage of half that set by the range switch is obtained with the variable set at half rotation and that other voltages are pro rata. A scale divided into ten equal sections is all that is required.

Switching

A switch is fitted to enable the unit to be bypassed when sinewave output is required. To enable the attenuator to be retained, a preset level control is fitted in the bypass loop. To set this, first measure the maximum output in the squarewave position. Now switch to sinewave and set the preset to give the same output as was obtained on the squarewave position.

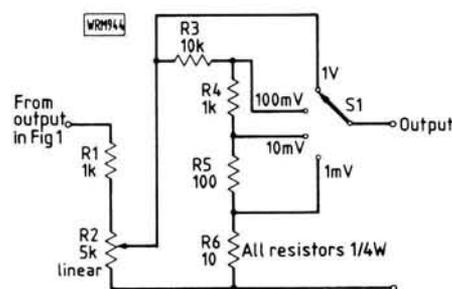


Fig. 2: A reasonably accurate output attenuator

Construction

There is nothing touchy at all about the layout of this unit. The two transistor stages can be built on a small piece of Veroboard and the unit then mounted, with the attenuator if required, in a small diecast box. Suitable input, output and power supply terminals should be fitted to match your own requirements. The unit will run with a nominal twelve volt supply and draws only a few milliamperes. **PW**

SWAP SPOT

Have Amstrad CPC464 with modulator (no monitor). Also Planet P.T.V.I. 5 inch monochrome portable TV, nearly new, runs from mains, car or batteries. Would exchange for general coverage receiver, solid state if possible or w.h.y? Tel: 0481 26168. **E396**

Have pair of 813 valves with matching bases. Would exchange for VFO-520, G3RB, QTHR. Tel: 091-253 0504 **E401**

Have Uniden CR-2021 receiver, 150kHz-26MHz plus f.m. band. Would exchange for VHS video recorder. Congleton, Cheshire. Tel: 0260 274470 **E404**

Have chainsaws Danarm 25 inch, Danarm 20 inch, Skill 12 inch. Would exchange for FT-101, FT-401 or similar rig. Bob. Tel: 0494 29868. **E408**

Have Pro alarm control panel, 999 caller, ultrasonic detector, cost

£200, never used. Would exchange for good auto focus camera. E. Hockley, 61 Disraeli Terrace, Leeds LS11 6NT. **E409**

Have Trio TR-2400, Kenwood SW100 s.w.r., Yaesu FT-101ZD MkIII, Yaesu FC-107 a.t.u., Yaesu SP-107 speaker, new G5RV, new base station mike, all items mint, most boxed. Also much Commodore 128 (some 64) software and hardware. Would exchange for satellite TV gear or w.h.y? Tel: 08482 314. **E410**

Have various Brooke Bond tea cards. Would exchange 25 cards for Mullard OC44 or OC71 transistors, 10 cards for Mullard OA81 or GEC34 crystal diode. Soar, 15 Brand Street, Hitchin, Herts SG5 1JE. **E416**

Have Gould OS4000 digital storage oscilloscope with output unit 4002. Also 10 amp Variac in case with current and volt meters, plus 10 amp 12 volt d.c. supply. Would exchange for h.f. transceiver or 28MHz linear amp. G3EAY. Tel: Saffron Walden 30763. **E419**

Amateur Radio in Australia



My marker of the warmer months, the constellation Orion, has finally slipped from view and frosts have started at my QTH. Which of course leaves longer evenings for radio, says Greg Baker in Part 4 of his occasional series.

Traffic Networks

A sparse population and a stable continent give Australia few emergencies or natural disasters. Nonetheless, Australian amateurs have two emergency traffic nets training for future need. They are WICEN, the Wireless Institute Civil Emergency Network and ATN, the Australian Traffic Net.

WICEN is an emergency traffic net similar to RAYNET or the USA's ARES. In VK2, WICEN emerged from the experience of devastating floods in Maitland (120km north of Sydney) in the 1950's. Because of their range of frequency choice, WICEN Australia-wide has proved useful in a number of emergencies over the intervening years, from the disaster resulting from Cyclone Tracy's destruction of Darwin in 1974, to the Victorian Ash Wednesday bushfires in 1983, to the North Queensland's Cyclone Winifred in 1986.

Because it can only be activated by emergency authorities, in normal times WICEN maintains skills by assisting at sporting events where radio communications are needed. Examples in VK2 were a cave rescue exercise and a motor vehicle sprint, and in VK3, a long distance cycle race.

The VK2 cave rescue exercise was organised by the Sydney-based Cave Rescue Group (CRG). It is an annual event and the largest such exercise in the southern hemisphere. Running over three days, it involved thirty members of the CRG and about 160 speleologists and emergency services personnel from all over Eastern Australia. The caves used for the exercise were those at Bungonia (150km south west of Sydney), 158 caves scattered over an area of about 20 square km.

As is usual in such an exercise, WICEN used a 144MHz field repeater located on a dominant hill top. Jeff VK2BYY operated a controlled network from a tent a hundred metres from the repeater keeping in contact with WICEN operations assigned to groups of cavers dotted over the area.

The WICEN function was to pass routine CRG traffic, simulated emer-

gency traffic and be ready in case of real emergency. Most traffic was duplex v.h.f. f.m. via the repeater, though a novel feature was the use of VK2PJ's car mounted 430MHz-144MHz translocator for use with u.h.f. hand helds.

The motor sprint, at Amaroo a few kilometres north west of Sydney was a straightforward exercise involving only a half dozen WICEN operators and led by Peter VK2EMU. Its main purpose was to train new members in WICEN message handling techniques. Because of the simplicity of the task—making sure the track was clear before each sprint—Simplex 144MHz v.h.f. f.m. only was used.

A recent VK3 WICEN exercise was to provide communications for the annual Bairnsdale to Melbourne Great Bike Race. The 2500 riders in the race, really a giant fun ride, covered the approximately 400km from Bairnsdale on the coast east of Melbourne in just over a week. WICEN volunteers complemented St. John's Ambulance communications, together ensuring safety and good race management for all riders on this marathon event.

Because of the wider range of communications equipment in the hands of emergency services and the greater number of radio equipped vehicles with services such as police, ambulance, bushfire brigades, forest fire crews, National Parks and Wildlife Service fire crews and State Emergency Services, WICEN is beginning to find their role more circumscribed. This means that WICEN is having to adapt to roles not able to be effectively carried out by the emergency services. For example, most official emergency traffic is on simplex high or low band v.h.f. which limits range somewhat. WICEN is often able to offer greater range possibilities by use of the h.f. bands, by arranging RAAF helicopter placement of portable v.h.f. amateur repeaters on suitable mountain tops and by interlinking permanent repeaters as previously reported.

Upcoming VK2 WICEN exercises are Sydney's annual City to Surf fun run in August, the Bateman's Bay car rally in state forests 220km south of

Sydney in September and at Outward Bound's Hawkesbury River canoe race in October. In addition there is talk of WICEN involvement in a Sydney to Melbourne bicycle race in 1988.

Able to co-operate with WICEN is ATN. ATN is modelled along the lines of the USA's NTS (see *PW* May 1987). It is self-activated, operating 365 days per year with routine third party health and welfare traffic on several frequencies, and for longer periods on a wide range of frequencies in time of communication need.

Current ATN routing schedules are, for Australian east coast traffic, the Australian Traffic Net on 3.570MHz at 1030Z daily, and for messages to and from VK6, the Trans Australian Traffic Net on 7.060MHz or 14.280MHz at 1100Z Monday, Wednesday and Friday.

Australia currently has international third party traffic agreements with USA, Canada and Israel. International traffic is carried on four nets, three of which are to North America. The Australian Traffic Network to North America is on 7.228MHz at 0730Z daily, the International Assistance and Traffic Network is on 14.303MHz at 1100Z daily and the Australian American Traffic Network is on 14.280MHz +/- 10kHz at 0500Z daily. The Australian Israeli Traffic Network is on 14.280MHz +/- 10kHz at 1400Z daily and at 0500Z Australian Fridays and Saturdays.

In addition to these routine daily message handling schedules ATN maintains emergency preparedness by a regular Simulated Emergency Test (SET) designed to test ATN Emergency Communications (ECom) plans. This year's SET (a simulated cyclone taking out Sydney's telephone network) was held in late June. ATN stations were linked with the CB emergency traffic net via a "gateway" of co-located amateur and CB transceivers. CB operators carried local Sydney test traffic while ATN moved messages into and out of Sydney, both Australia wide and to and from North America.

BOOK SERVICE

The books listed have been selected as being of special interest to our readers. They are supplied from our editorial address direct to your door. Some titles are overseas in origin.

HOW TO ORDER

Add 75p per order postage (overseas readers add £1.50 for surface mail postage) and send a postal order, cheque or international money order with your order (quoting book titles and quantities) to **PW Publishing Limited, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP**. Payment by Access, Mastercard, Eurocard or Visa also accepted on telephone orders to Poole (0202) 678558. Books normally despatched by return of post but please allow 28 days for delivery.

★ A recent addition to our Book Service. O/P = Out of print, O/S = Out of stock.

RADIO

★ AIR & METEO CODE MANUAL

Joerg Klिंगenfuss 10th edition
Contains detailed description of the World Meteorological Organisation Global Telecommunication System operating FAX and RTTY meteo stations, and of its message format with decoding examples. Also contains detailed description of the Aeronautical Fixed Telecommunication Network amongst others. 293 pages £15.00

BETTER RADIO/TV RECEPTION

A. Nallawalla, A. T. Cushen and B. D. Clark

An Australian publication giving guidance and advice both to listeners seeking reliable reception of some distant radio station, and to DX listening hobbyists. 134 pages £9.95

BETTER SHORTWAVE RECEPTION (USA)

W. S. Orr W6SAI & S. D. Cowan W2LX
Receivers, antennas, propagation, DX listening techniques for the short waves and v.h.f. 158 pages £5.50

★ PASSPORT TO WORLD BAND RADIO

This book gives you the information you need to explore and enjoy the world of broadcast band listening. It includes features on different international radio stations, receiver reviews and advice as well as the hours and language of broadcast stations by frequency. 398 pages £11.95

SCANNERS (updated)

Peter Rouse GU1DKD
A guide for users of scanning receivers, covering hardware, antennas, accessories, frequency allocations and operating procedure. 177 pages £7.95

SCANNERS 2

Peter Rouse GU1DKD
The companion to Scanners, this provides even more information on the use of v.h.f. and u.h.f. communications band and gives constructional details for accessories to improve the performance of scanning equipment. 216 pages £9.95

★ SHORT WAVE RADIO LISTENERS' HANDBOOK

Arthur Miller
In easy-to-read and non-technical language, the author guides the reader through the mysteries of amateur, broadcast and CB transmissions. 207 pages £6.99

★ RADIOTELETYPE CODE MANUAL

10th Edition
Joerg Klिंगenfuss
This book provides detailed descriptions of the characteristics of telegraph transmission on short waves, with all commercial modulation types including voice frequency telegraphy. It provides comprehensive information on all RTTY systems and c.w. alphabets. 96 pages £8.00

THE SATELLITE EXPERIMENTER'S HANDBOOK (USA)

A guide to understanding and using amateur radio, weather and TV broadcast satellites. 207 pages £9.25

BEGINNERS

AN INTRODUCTION TO RADIO DXING (BP91)

R. A. Penfold
How to find a particular station, country or type of broadcast and to receive it as clearly as possible. 112 pages £1.95

BEGINNER'S GUIDE TO RADIO (9th Edition)

Gordon J. King
Radio signals, transmitters, receivers, antennas, components, valves and semiconductors, CB and amateur radio are all dealt with here. 266 pages £6.95

BEGINNER'S GUIDE TO ELECTRONICS

Owen Bishop
For youngsters thinking of a career in electronics, theory and applications in computers, radio, TV, recording, medical and industrial electronics. 240 pages £4.95

★ ELECTRONICS SIMPLIFIED—CRYSTAL SET CONSTRUCTION (BP192)

F. A. Wilson
This is a book especially written for those who wish to take part in basic radio building. All the crystal sets in the book are from old designs but updated to take account of modern components. 72 pages £1.75

QUESTIONS & ANSWERS

RADIO

Eugene Trundle
Basics of electrical theory, radio and semiconductors, receivers, amateur and CB radio, and test equipment. 110 pages £2.95

THE SIMPLE ELECTRONIC CIRCUIT AND COMPONENTS Book 1 (BP62)

The aim of this book is to provide an inexpensive but comprehensive introduction to modern electronics. 209 pages £3.50

TELEVISION

★ AN INTRODUCTION TO SATELLITE TELEVISION (BP195)

F. A. Wilson
Answers all kinds of questions about satellite television. For the beginner thinking about hiring or purchasing a satellite TV system there are details to help you along. For the engineer there are technical details including calculations, formulae and tables. Plenty of advice for the d.i.y. enthusiast. 104 pages £5.95

A TV-DXERS HANDBOOK (BP176)

R. Bunney
Information on transmission standards, propagation, receivers including multi-standard, colour, satellites, antennas, photography, station identification, interference, etc. Revised and updated 1986. 87 pages £5.95

SATELLITE TELEVISION

Peter S. Pearson
How satellite TV works, setting up your own TVRO terminal, the costs, the programmes available. 72 pages £4.95

GUIDE TO WORLD-WIDE TELEVISION TEST CARDS

2nd Edition
Keith Hamer and Garry Smith
The main purpose of this book is to assist long distance television enthusiasts (TV DXers) around the world with signal identification. There are 240 test cards, identification slides and clock captions pictured. It is in "semi-alphabetical" order, that is the stations are in alphabetical order in their geographical sections. 52 pages £2.95

THEORY

AMATEUR RADIO & ELECTRONICS STUDY GUIDE

3rd Edition
Ian Ridpath ZL1BCG
This book aims to fill the gap between high level amateur radio handbooks and over-simplified beginners manuals. It is written in a "students own notes" format that hopes to put the reader more at ease than formally written text books do. 216 pages £7.00

COMMUNICATION (BP89)

(Elements of Electronics—Book 5)
F. A. Wilson
Fundamentals of line, microwave, submarine, satellite, digital multiplex, radio and telegraphy systems are covered, without the more complicated theory or mathematics. 256 pages £2.95

FOUNDATIONS OF WIRELESS AND ELECTRONICS (10th Edition)

M. G. Scroggie and S. W. Amos
Covering d.c. and a.c. circuits, L, C, tuned circuits and selectivity, valves, semiconductors, transmission lines, antennas, radiation, oscillation, modulation, detection, amplification, superhet receivers, c.r.t.s, waveform generators and switches, computers and power supplies. 551 pages £8.95

LEVEL II RADIO & ELECTRONICS THEORY

Ian Ridpath ZL1BCG
A sequel to Amateur Radio & Electronics Study Course, this book covers advanced theory up to a level needed on most technician courses. The handwritten format is designed to make the student feel as though the pages are his own notes. 169 pages £6.70

PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE (BP53)

F. A. Wilson
This has been written as a workshop manual for the electronics enthusiast. There is a strong practical bias and higher mathematics have been avoided where possible. 249 pages £3.95

LISTENING GUIDES

AIR BAND RADIO HANDBOOK

David J. Smith
With air band radio you can eavesdrop on the conversations between aircraft and those on the ground who control them. The author, an air traffic controller, explains more about this listening hobby. 174 pages £5.99.

DIAL SEARCH (5th Edition 1988/89)

George Wilcox
The listener's check list and guide to European broadcasting. Covers medium wave, long wave, v.h.f. and short wave, including two special maps, making the most of your portable and many more. 46 pages £3.25

GUIDE TO BROADCASTING STATIONS

19th Edition (1987/88)
Philip Darrington
Frequency and station data, receivers, antennas, Latin American DXing, reporting, computers in radio, etc. 240 pages £6.95

★ GUIDE TO FACSIMILE STATIONS

8th Edition
Joerg Klिंगenfuss
This manual is the basic reference book for everyone interested in FAX. Frequency, callsign, name of the station, ITU country/geographical symbol, technical parameters of the emission are all listed. All frequencies have been measured to the nearest 100Hz. 262 pages £13.00

GUIDE TO FORMER UTILITY TRANSMISSIONS

3rd Edition
Joerg Klिंगenfuss
This manual is built on continuous monitoring of the radio spectrum from the sixties until the recent past. It is a useful summary of former activities of utility stations and provides information to the active radio monitor in the classification and identification of radio signals. 126 pages £8.00

GUIDE TO UTILITY STATIONS

6th Edition
Joerg Klिंगenfuss
This book covers the complete short wave range from 3 to 30MHz plus the adjacent frequency bands from 0 to 150kHz and from 1.6 to 3MHz. It includes details on all types of utility stations including FAX and RTTY. There are 15802 entries in the frequency list and 3123 in the alphabetical callsign list plus press services and meteorological stations. 494 pages £19.00

HF OCEANIC AIRBAND COMMUNICATIONS (3rd Edn.)

Bill Laver
Aircraft channels by frequency and band, main ground radio stations, European R/T networks, North Atlantic control frequencies. 29 pages £3.50

★ INTERNATIONAL RADIO STATIONS GUIDE (BP255)

Updated and completely re-written in June 1988. It provides the casual listener and DXer with an essential reference work designed to guide them around the ever more complex radio bands. 312 pages £4.95

THE COMPLETE VHF/UHF FREQUENCY GUIDE

Updated 1988
This book gives details of frequencies from 26-2250MHz with no gaps and who uses what. Recently updated, there are chapters on equipment requirements as well as antennas, etc. 88 pages £5.95

★ THE INTERNATIONAL VHF FM GUIDE

7th Edition
Julian Baldwin G3UHK & Kris Partridge G8AUU
The latest edition of this useful book gives concise details of repeaters and beacons worldwide plus coverage maps and further information on UK repeaters. 70 pages £2.85

UK LISTENERS CONFIDENTIAL FREQUENCY LIST (5th Edition)

Bill Laver
Covering the services and transmission modes that can be heard on the bands between 1.635 and 29.7MHz. 147 pages £6.95

VHF/UHF AIRBAND FREQUENCY GUIDE

A complete guide to the airband frequencies including how to receive the signals, the frequencies and services, VOLMET and much more about the interesting subject of airband radio. 74 pages. £5.95

WORLD RADIO TV HANDBOOK 1988

Country-by-country listings of long, medium and short wave broadcasters and TV stations. Receiver test reports. English language broadcasts. The s.w.l.'s "bible". 576 pages £17.95

INTERFERENCE

INTERFERENCE HANDBOOK (USA)

William R. Nelson WA6FQG

How to locate and cure r.f.i. for radio amateurs, CBers and TV and stereo owners. 253 pages £6.75

RADIO FREQUENCY INTERFERENCE (USA)

What causes r.f.i.? Are all r.f.i. problems difficult, expensive and time-consuming to cure? These questions and many more are answered in this book. 84 pages £4.30

TELEVISION INTERFERENCE MANUAL (RSGB)

B. Priestley

TV channels and systems, spurious-radiation TVI, strong-signal TVI, audio breakthrough, transmitter design. 78 pages £2.94

AMATEUR RADIO

AMATEUR RADIO CALL BOOK (RSGB)

Winter 87/88 Edition

This useful work now incorporates a 48-page reference section of useful information for amateur radio enthusiasts. 310 pages £7.25

AMATEUR RADIO LOGBOOK

Standard logbook for the transmitting amateur in horizontal A4 format. 25 lines per page. 96 pages £2.30

AMATEUR RADIO OPERATING MANUAL (RSGB)

A mine of information on just about every aspect of amateur operating, including international callsign series holders, prefix lists, DXCC countries list, etc. 204 pages £6.16

AMATEUR RADIO SATELLITES the first 25 years
Arthur C. Gee G2UK
The material in this souvenir publication is drawn from the author's archives. It is mainly a pictorial account on the pattern of developments which have occurred over the last 25 years. 34 pages £2.25

CARE AND FEEDING OF POWER GRID TUBES (USA)
This handbook analyses the operation of EIMAC power grid valves and provides design and application information to assist the user of these valves. 156 pages £6.75

HOW TO PASS THE RADIO AMATEURS' EXAMINATION (RSGB)
G. L. Benbow G3HB
The background to multiple choice exams and how to study for them with nine sample RAE papers for practice, plus maths revision. 91 pages £3.15

PASSPORT TO AMATEUR RADIO
Reprinted from PW 1981-1982
The famous series by GW3JGA, used by thousands of successful RAE candidates as an aid to their studies. Plus other useful articles for students of amateur radio. 96 pages £1.50

QUESTIONS & ANSWERS AMATEUR RADIO
F. C. Judd G2BCX
What is amateur radio? The Radio Amateurs' Exam and Licence. The technology, equipment, antennas, operating procedure and codes used by amateurs. 122 pages £2.95

RADIO AMATEUR'S GUIDE RADIO WAVE PROPAGATION (HF Bands)
F. C. Judd G2BCX
The how and why of the mechanism and variations of propagation in the h.f. bands. 144 pages £8.95

RADIO AMATEUR'S MAP OF NORTH AMERICA (USA)
Shows radio amateurs prefix boundaries, continental boundaries and zone boundaries. 760 x 636mm £2.25

* RADIO AMATEUR'S PREFIX MAP OF THE WORLD (USA)
Showing prefixes and countries, plus listings by order of country and of prefix. 1014 x 711mm £2.50

* RADIO AMATEUR'S WORLD ATLAS (USA)
17 pages of maps, including the world-polar projection. Also includes the table of allocation of international callsign series. £2.95

* THE RADIO AMATEUR'S DX GUIDE (USA) 15th Edition
The guide contains information not easily obtained elsewhere and is intended as an aid and quick reference for all radio amateurs interested in DX. 38 pages. £2.95

THE RADIO AMATEUR'S QUESTIONS & ANSWER REFERENCE MANUAL 3rd Edition
R.E.G. Petri G8CCJ
This book has been compiled especially for students of the City and Guilds of London Institute RAE. It is structured, with carefully selected multiple choice questions, to progress with any recognised course of instruction, although it is not intended as a text book. 258 pages £6.95

THE 1988 ARRL HANDBOOK FOR THE RADIO AMATEUR

This, the sixty-fifth edition is available only in hardback, the first time the ARRL have done this. New construction projects are the theme of this edition, there is a deluxe memory keyer, receiver projects, a linear QSK converter, a low-powered balanced Transmatch and a d.t.m.f. decoder. Updated every year, this provides useful reference material for the radio amateur. It also includes 18 pages of p.c.b. track pattern for you to build your own boards. 1157 pages £19.25 (hardback)

VHF HANDBOOK FOR RADIO AMATEURS (USA)

H. S. Brier W9EGQ & W. I. Orr W6SAI

VHF/UHF propagation, including moonbounce and satellites, equipment and antennas. 335 pages £7.95

* VHF/UHF MANUAL (RSGB)

G. R. Jessop G6JP

Theory and practice of amateur radio reception and transmission, between 30MHz and 24GHz. 520 pages £7.95

DATA & REFERENCE

DIGITAL IC EQUIVALENTS AND PIN CONNECTIONS (BP140)

A. Michaels

Equivalents and pin connections of a popular selection of European, American and Japanese digital i.c.s. 256 pages £5.95

INTERNATIONAL DIODE EQUIVALENTS GUIDE (BP108)

A. Michaels

Possible substitutes for a large selection of many different types of semiconductor diodes. 144 pages £2.25

INTERNATIONAL TRANSISTOR EQUIVALENTS GUIDE (BP85)

A. Michaels

Possible substitutes for a popular selection of European, American and Japanese transistors. 320 pages £3.50

LINEAR IC EQUIVALENTS AND PIN CONNECTIONS (BP141)

A. Michaels

Equivalents and pin connections of a popular selection of European, American and Japanese linear i.c.s. 320 pages £5.95

NEWNES AUDIO & HI-FI ENGINEER'S POCKET BOOK

Vivian Capel

This is a concise collection of practical and relevant data for anyone working on sound systems. The topics covered include microphones, gramophones, CDs to name a few. 190 pages Hardback £9.95

NEWNES COMPUTER ENGINEER'S POCKET BOOK

This is an invaluable compendium of facts, figures, circuits and data and is indispensable to the designer, student, service engineer and all those interested in computer and microprocessor systems. 203 pages Hardback £8.95

NEWNES ELECTRONICS POCKET BOOK

5th Edition

Presenting all aspects of electronics in a readable and largely non-mathematical form for both the enthusiast and the professional engineer. 315 pages Hardback £8.95

NEWNES RADIO AMATEUR AND LISTENER'S POCKET BOOK

Steve Money G3FZX

This book is a collection of useful and intriguing data for the traditional and modern radio amateur as well as the short wave listener. Topics such as AMTOR, packet radio, SSTV, computer communications, airband and maritime communications are all covered. 160 pages Hardback £8.95

NEWNES RADIO AND ELECTRONICS ENGINEER'S POCKET BOOK

(17th Edition)

Keith Brindley

Useful data covering maths, abbreviations, codes, symbols, frequency bands/allocations, UK broadcasting stations, semiconductors, components, etc. 201 pages Hardback £6.95

* NEWNES TELEVISION AND VIDEO ENGINEER'S POCKET BOOK

Eugene Trundle

This is a valuable reference source for practitioners in "entertainment" electronic equipment. It covers TV reception from v.h.f. to s.h.f., display tubes, colour camera technology, video recorder and video disc equipment, video text and hi-fi sound. 323 pages Hardback £9.95

POWER SELECTOR GUIDE (BP235)

J. C. J. Van de Ven

This guide has the information on all kinds of power devices in useful categories (other than the usual alpha numeric sort) such as voltage and power properties making selection of replacements easier. 160 pages £4.95

RSGB RADIO DATA REFERENCE BOOK

G. R. Jessop G6JP

The 5th Edition of an essential book for the radio amateur's or experimenter's workbench. 244 pages Hardback £8.56

SEMICONDUCTOR DATA BOOK

A. M. Ball

Characteristics of about 10 000 transistors, f.e.t.s, u.i.t.s, diodes, rectifiers, triacs and s.c.r.s. 175 pages £7.50

TRANSISTOR SELECTOR GUIDE (BP234)

J. C. J. Van de Ven

This guide has the information on all kinds of transistors

in useful categories (other than the usual alpha numeric sort) such as voltage and power properties making selection of replacements easier. 192 pages £4.95

FAULT-FINDING

ARE THE VOLTAGES CORRECT?

Reprinted from PW 1982-1983

How to use a multimeter to fault-find on electronic and radio equipment, from simple resistive dividers through circuits using diodes, transistors, i.c.s and valves. 44 pages £1.50

* GETTING THE MOST FROM YOUR MULTIMETER (BP239)

R. A. Penfold

This book is primarily aimed at beginners. It covers both analogue and digital multimeters and their respective limitations. All kinds of testing is explained too. No previous knowledge is required or assumed. 102 pages £2.95

* MODERN ELECTRONIC TEST EQUIPMENT

Keith Brindley

This book describes in a down-to-earth manner how the main categories of test equipment work. The subjects covered include analogue and digital meters, oscilloscopes, signal sources, frequency, time and event counters, spectrum and logic analysers, displays and automatic test equipment. 134 pages £6.95

OSCILLOSCOPES, HOW TO USE THEM, HOW THEY WORK (Revised 2nd Edition)

Ian Hickman

This book describes oscilloscopes ranging from basic to advanced models and the accessories to go with them. 133 pages £6.95

PRACTICAL HANDBOOK OF VALVE RADIO REPAIR

Chas E Miller

The definitive work on repairing and restoring valved broadcast receivers dating from the 1930s to the 60s. Appendices giving intermediate frequencies, valve characteristic data and base connections. 230 pages Hardback £17.50

QUESTIONS & ANSWERS RADIO REPAIR

Les Lawry-Johns

How to fault-find and repair valved and transistorised receivers, car radios and unit audio equipment. Suggested lists of tools and spare parts. 106 pages £2.95

SERVICING RADIO, HI-FI AND TV EQUIPMENT

Gordon J King

A very practical book looking at semiconductor characteristics, d.c. and signal tests, fault-finding techniques for audio, video, r.f. and oscillator stages and their application to transistor radios and hi-fi. 205 pages £9.95

TEST EQUIPMENT FOR THE RADIO AMATEUR (RSGB)

H. L. Gibson G2BUP

Techniques and equipment for tests and measurements on devices, systems and antennas. 142 pages Hardback O/P

TRANSISTOR RADIO FAULT FINDING CHART (BP70)

C. E. Miller

Used properly, should enable most common faults to be traced reasonably quickly. Selecting the appropriate fault description at the head of the chart, the reader is led through a sequence of suggested checks until the fault is cleared. 635 x 455mm (approx) £0.95

PROJECT CONSTRUCTION

HOW TO BUILD ADVANCED SHORT WAVE RECEIVERS (BP226)

R. A. Penfold

Greater satisfaction can be gained from the hobby of shortwave listening when using home constructed equipment. This book gives full practical constructional details of a number of receivers as well as some add-on circuits like S-meters and noise limiters. 118 pages £2.95

HOW TO DESIGN AND MAKE YOUR OWN P.C.B.s (BP121)

R. A. Penfold

Designing or copying printed circuit board designs from magazines, including photographic methods. 80 pages £1.95

INTRODUCING QRP

Collected Articles from PW 1983-1985

An introduction to low-power transmission, including constructional details of designs by Rev. George Dobbs G3RJV for transmitters and transceivers from Top Band to 14MHz, and test equipment by Tony Smith G4FAI. 64 pages £1.50

MORE ADVANCED POWER SUPPLY PROJECTS (BP192)

R. A. Penfold

The practical and theoretical aspects of the circuits are covered in some detail. Topics include switched mode power supplies, precision regulators, dual tracking regulators and computer controlled power supplies, etc. 92 pages £2.95

POWER SUPPLY PROJECTS BP76

R. A. Penfold

This book gives a number of power supply designs including simple unregulated types, fixed voltage regulated types and variable voltage stabilised designs. 91 pages £2.50

PRACTICAL POWER SUPPLIES Collected Articles from PW 1978-1985

Characteristics of batteries, transformers, rectifiers, fuses and heatsinks, plus designs for a variety of mains-driven power supplies, including the PW "Marchwood" giving a fully stabilised and protected 12V 30A d.c. 48 pages £1.25

PROJECTS IN AMATEUR RADIO AND SHORT WAVE LISTENING

F. G. Rayer G3OGR

Full constructional details are given for all projects, including housing the units in a suitable case. All the projects are either on p.c.b. or matrix board. 90 pages £4.95

★ QRP NOTEBOOK Doug DeMaw W1FB

This book deals with the building and operating of a successful QRP station. Lots of advice is given by the author who has spent years as an ardent QRP'er. All the text is easy to read and the drawings are large and clear. 77 pages £3.95

SOLID STATE SHORT WAVE RECEIVERS FOR BEGINNERS (BP222)

R. A. Penfold

There is a strange fascination in listening to a broadcast which has been transmitted over many thousands of kilometres. This is even more the case when you've built the receiver yourself. This book contains several designs that will give a fairly high level of performance. 93 pages £2.95

AUDIO FREQUENCIES

AUDIO (BP111)

(Elements of Electronics—Book 6)

F. A. Wilson

This book studies sound and hearing, and the operation of microphones, loudspeakers, amplifiers, oscillators, and both disc and magnetic recording. 320 pages £3.50

ANTENNAS (AERIALS)

AERIAL PROJECTS (BP105)

R. A. Penfold

Practical designs including active, loop and ferrite aerials plus accessory units. 96 pages £1.95

ALL ABOUT CUBICAL QUAD

ANTENNAS (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Theory, design, construction, adjustment and operation of quads. Quads vs. Yagis. Gain figures. 109 pages £5.50

ALL ABOUT VERTICAL ANTENNAS (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Theory, design, construction, operation, the secrets of making vertical work. 191 pages £7.50

AN INTRODUCTION TO ANTENNA THEORY

(BP198)

H. C. Wright

This book deals with the basic concepts relevant to receiving and transmitting antennas. Lots of diagrams reduce the amount of mathematics involved. 86 pages £2.95

BEAM ANTENNA HANDBOOK (USA)

W. I. Orr W6SAI & S. D. Cowan W2LX

Design, construction, adjustment and installation of h.f. beam antennas. 198 pages £6.75

★ HF ANTENNAS
FOR ALL LOCATIONS (RSGB)

L. A. Moxon G6XN

Taking a new look at how h.f. antennas work, and putting theory into practice. 260 pages £5.69

OUT OF THIN AIR

Collected Antenna Articles from PW 1977-1980

Including such favourites as the ZL Special and "2BCX 16-element beams for 2m, and the famous "Slim Jim", designed by Fred Judd G2BCX. Also features systems for Top Band, medium wave/long wave loop designs and a v.h.f. direction finding loop. Plus items on propagation, accessories and antenna design. 80 pages £1.80

SIMPLE, LOW-COST WIRE ANTENNAS FOR RADIO AMATEURS (USA)

W. I. Orr W6SAI and S. D. Cowan W2LX

Efficient antennas for Top Band to 2m, including "invisible" antennas for difficult station locations. 191 pages £6.75

THE ARRL ANTENNA BOOK

14th Edition (USA)

A station is only as effective as its antenna system. This book covers propagation, practical constructional details of almost every type of antenna, test equipment and formulas and programs for beam heading calculations. 327 pages £9.10

THE ARRL ANTENNA COMPENDIUM Volume 1 (USA)

This book makes fascinating reading of hitherto unpublished material. Among topics discussed are quads and loops, log periodic arrays, beam and multi-band antennas, verticals and reduced size antennas. 175 pages £9.25

THE RADIO AMATEUR ANTENNA NOTEBOOK

William I. Orr W6SAI & Stuart D. Cowan W2LX

Yagi, quad, quagi, l-p, vertical, horizontal and "sloper" antennas are all covered. Also towers, grounds and rotators. 190 pages £6.75

TWO-METRE ANTENNA HANDBOOK

F. C. Judd wrote this book for radio amateurs new to the 144-146MHz band. The range of antennas described will cater for most situations, particularly those where space is a problem. 157 pages £5.95

WIRES & WAVES

Collected Antenna Articles from PW 1980-1984

Antenna and propagation theory, including NBS Yagi design data. Practical designs for antennas from medium waves to microwaves, plus accessories such as a.t.u.s, s.w.r. and power meters, and a noise bridge. Dealing with TVI. 160 pages £3.00

★ W1FB'S ANTENNA NOTEBOOK

Doug DeMaw W1FB

This book provides lots of designs, in simple and easy-to-read terms, for simple wire and tubing antennas. All drawings are large and clear making construction much easier. 124 pages £4.95

25 SIMPLE AMATEUR BAND AERIALS (BP125)

E. M. Noll

How to build 25 simple and inexpensive aerials, from a simple dipole through beam and triangle designs to a mini-rhombic. Dimensions for specific spot frequencies, including the WARC bands. 80 pages £1.95

25 SIMPLE INDOOR

AND WINDOW AERIALS (BP136)

E. M. Noll

Designs for people who live in flats or have no gardens, etc., giving surprisingly good results considering their limited dimensions. 64 pages £1.75

25 SIMPLE SHORT WAVE

BROADCAST BAND AERIALS (BP132)

E. M. Noll

Designs for 25 different aerials, from a simple dipole through helical designs to a multi-band umbrella. 80 pages £1.95

25 SIMPLE TROPICAL

AND MW BAND AERIALS (BP145)

E. M. Noll

Simple and inexpensive aerials for the broadcast bands from medium wave to 49m. 64 pages £1.75

COMPUTING

AMATEUR RADIO

SOFTWARE (RSGB)

John Morris GM4ANB

Using a computer for c.w., RTTY, data, plus calculations for antennas, distance, bearing, locators, satellites, sun, moon and circuit design. 328 pages Hardback £9.41

AN INTRODUCTION TO COMPUTER

COMMUNICATIONS (BP177)

R. A. Penfold

Details of various types of modem and their applications, plus how to interconnect computers, modems, and the telephone system. Also networking systems and RTTY. 96 pages £2.95

AN INTRODUCTION TO

COMPUTER PERIPHERALS (BP170)

J. W. Penfold

Covers monitors, printers, disk drives, cassette recorders, modems, etc., explaining what they are, how to use them and the various types of standards. 80 pages £2.50

MICROPROCESSING SYSTEMS

AND CIRCUITS (BP77)

(Elements of Electronics—Book 4)

F. A. Wilson

A comprehensive guide to the elements of microprocessing systems, which are becoming ever more involved in radio systems and equipment. 256 pages £2.95

MORSE

INTRODUCING MORSE

Collected Articles from PW 1982-1985

Ways of learning the Morse Code, followed by constructional details of a variety of keys including Iambic, Triambic, and an Electronic Bug with a 528-bit memory. 48 pages £1.25

THE MORSE CODE

FOR RADIO AMATEURS (RSGB)

Margaret Mills G3ACC

A guide to learning to send and receive Morse code signals up to the 12 w.p.m. required for the RAE. 19 pages £2.88

THE SECRET OF LEARNING MORSE CODE

Mark Francis

Designed to make you proficient in Morse code in the shortest possible time, this book points out many of the pitfalls that beset the student. 87 pages £4.95

39▶

Because of ATN assistance with recent overseas disasters and as a result of SET, ATN is more visible to the public than WICEN. Given the pressures on the amateur frequency spectrum and the dwindling amateur numbers, such a high profile has been a useful public relations exercise for amateur radio.

During the 1985 Mexico earthquake ATN passed 600 messages for concerned relatives and for the Mexican embassy in Australia. In 1986, ATN handled 200 health and welfare messages into San Salvador, the earthquake devastated capital of El Salvador. An ATN assisted Vanuatu amateur operators passing 60 messages into and out of Port Vila after the March 1987 Vanuatu cyclone. The passing of all these health and welfare messages to countries other than USA, Canada and Israel was made possible by temporary inter-government arrangements which have usually been readily agreed during the emergencies, the Australian government being always willing to attempt to negotiate these rights.

Despite this, however, Australian amateurs are not permitted by the

DOC to actively solicit third party traffic except during a natural disaster or declared emergency. Even though the position of the amateur service is unique in that it is unable to accept payment for their services, DOC feel that it would be a precedent to allow amateurs to solicit traffic.

ATN hotly disputes that this would be a precedent especially at hobby radio displays, but DOC currently remains adamant. This does not affect the ability of VK amateurs to send messages in normal times when requested to do so by members of the public. This is popular at hobby radio displays where greetings via amateur radio give both good PR for the hobby and amateur self training in relaying written messages.

This leads to some joint VK-ZL news. By the time of the March 1987 New Zealand Bay of Plenty earthquake, public awareness of the potential amateur radio benefits was relatively widespread in Australia. Messages began to arrive with ATN operators who were in contact with Joyce ZLICAB in the earthquake area. Despite an appeal to the New Zealand Post Office, the passing of third party traffic was not permitted by ZL au-

thorities. This stand was in turn supported by the ZL amateur organisation New Zealand Association of Radio Transmitters (NZART). ATN members holding traffic were forced to decline and return traffic. Articles in support of the possible amateur role and critical of the New Zealand Post Office appeared in several newspapers including the Wellington Dominion.

Since then, Robert ZL3TJP with the assistance of ATN co-ordinator Sam VK2BVS, has prepared a 140-page submission of New Zealand amateurs and NZART urging the sense of third party traffic nets within New Zealand and international agreements with Australia and New Zealand's Pacific neighbours.

**VK amateurs, s.w.i.s
and anyone else with
information of interest
to PW readers can
contact me at
PO Box 93, Braidwood,
NSW, 2622,
Australia.**

Practical Wireless, August 1988

ICOM

Count on us!

If you are a newly licensed or just undecided about which band to first operate, then the ICOM IC-3200E is just the answer. This is a dual-band (144-146/430-440MHz) FM transceiver ideally suited for the mobile operator. The IC-3200E has a built in duplexer and can operate on one antenna for both VHF and UHF, and with 25 watts of output power on both bands (the low power can be adjusted from 1 to 10 watts) you can never be far from a contact whether simplex or 2m/70cm repeater.

The IC-3200E employs a function key for low priority operation to simplify the front panel and a new LCD display which is easy to read in bright sunlight, 10 memory channels will show operating frequencies simplex or duplex, and four scanning systems memory, band, program and priority scan.

IC-3200E Dual-band

LOOK FOR THE SPECIAL PRICE EXCLUSIVE AT N.E.C.



Icom (UK) Ltd

Unit 8/9 Sea Street Industrial Estate, Herne Bay, Kent CT6 8LD. Telephone: (0227) 369464.

Open: 9-5.30, Lunch 1-2pm. Mondays to Saturdays.

C.M. HOWES COMMUNICATIONS



Eydon, Daventry,
Northants NN11 6PT

Phone: 0327 60178

Ham Radio does not have to be expensive!

80 and 40M QRP CW TRANSMITTERS

The HOWES CTX80 and CTX40 QRP transmitters have established themselves as two of the most popular little transmitters available. Tune around the QRP frequencies on 80M at almost any time and you will hear them being used to make contacts over quite surprising distances. Low power is no barrier to enjoying yourself on the air. In fact many QRP operators will tell you that it is one of the MOST enjoyable facets of amateur radio. Undoubtedly there is more challenge in building your own station, and operating at low power levels, than simply using factory built equipment. The benefit of lower cost is simply a bonus! If you fancy the challenge of some QRP work, may we suggest you consider adding a HOWES CTX transmitter to your station?

- ★ Adjustable power output up to 5W with CTX80 or 3W with CTX40.
- ★ Nominal 13.8V DC operation.
- ★ One crystal included, with provision on board for two more and for VFO use with the HOWES CVF80 or CVF40 VFO kits.
- ★ Can form part of a transceiver using HOWES DcRx receiver and CVF kits.
- ★ Five element output filter, full key clock suppression. Excellent note.

CTX80 or CTX40 kit: £13.80 Assembled PCB module: £19.90

DIRECT CONVERSION COMMUNICATIONS RECEIVERS

The HOWES DcRx series of receiver kits offer amazingly good performance for simple equipment. This is achieved by avoiding the "all singing, all dancing" approach, and optimising each version for a single amateur band. In this way complexity and expense are avoided, whilst giving a receiver that gives very pleasing results. Compare one with an expensive set, you will be surprised! The addition of the CSL4 dual bandwidth filter (£9.90 for the kit) gives this little set sharper selectivity than many expensive oriental imports! If you would like further embellishment, then we have a signal indicator kit (DCS2 at £6.60) to add some extra visual attraction to the front panel of your project. As HOWES kits form an interlinking range, you can add a transmitter, or an ATU, crystal calibrator, etc as you wish to build up your station. The HOWES DcRx receiver is available in 160, 80, 40 and 20/30 metre band versions. A case and a couple of tuning capacitors are the only major parts you need to add. We have suitable capacitors for all but the 160M version at £1.50 each while stocks last. The DcRx kits are easy to build, and make an excellent project for beginners, RAE students etc., as well as the experienced operator building a holiday rig or QRP station.

DcRx Kit: £15.60

Assembled PCB module: £21.50

CVF20, CVF40 and CVF80 VFOs FOR TRANSMIT/RECEIVE

Full featured VFO units with stable FET oscillator, dual buffered outputs, IRT, voltage regulator etc. Suitable tuning capacitor available at £1.50.

CVF kits for £20, 40 or 80M: £10.40 Assembled PCB module: £16.90

HC220 and HC280 20M or 80M TRANSVERTERS FOR 2M RIG

10W RF output, fully filtered with good receive performance from a balanced mixer, 13.8V DC operation for home/mobile/holiday use. A more advanced kit.

HC220 or HC280 kit: £52.50 Assembled PCB module: £83.50

SWB30 SWR/POWER INDICATOR/LOAD

All bands 160 to 2M. 30W rating for SWR/Power, but can be used for ATU adjustment with 100W rigs, providing the rig can give reduced tuning signal. A smart looking, custom made, moving coil meter is included.

SWB30 kit: £12.50 Assembled PCB module: £17.30

ASL5 DUAL BANDWIDTH RECEIVER FILTER

Improve the selectivity of your radio! 300Hz (-6dB) CW bandwidth, and extra sharp roll off for speech modes. Fits inline with external 'speaker' or 'phones'. A performance improvement for virtually every receiver/transceiver.


ASL5 kit: £14.90 Assembled PCB module: £22.50

CV220 and CV620 RECEIVE CONVERTERS

You can add coverage of the 2M or 6M VHF bands to your 20M shortwave receiver with one of these kits. Straightforward construction, good performance.

CV220 or CV620 kit: £17.50 Assembled PCB module: £23.90

HOWES FINISHED EQUIPMENT RANGE



Quite separate from our kit range, the finished equipment range offers items requiring manufacturing, test and alignment equipment beyond the scope of home constructors. See our full page advert in the June issue of RadCom.

HC266 2m to 6M transverter: £179.90. 4M version (HC246) same price.

All HOWES kits include full instructions, good quality PCB and all board mounted components. An SAE will bring a copy of our catalogue showing all our kit range, and an information sheet on any product you are especially interested in. P&P is £1.00 per order, delivery normally within 7 days.

Low-cost Indoor Antenna For 144MHz

The humble wire coat-hanger is used by thousands as a car radio antenna. Now it's the turn of the radio amateur with this novel table-top antenna from F.C. Judd G2BCX.

Many are faced with the problem of being unable to erect any type of 144MHz outdoor antenna. This means the only viable alternative is an indoor antenna. With the increasing number of people having no access to loft or roof space, it narrows the possible antennas down to the table-top, or "in-room", varieties.

The simple antenna described in this article is easy to construct and needs little by way of materials. These amount to four wire coat-hangers, two strips of 30A "choc-block" screw type connectors, a few woodscrews and a piece of wood for a base. No soldering is required except for a plug on the transmitter end of the coaxial cable. It takes very little time to construct and, aside from its application as a permanent indoor antenna, it could be taken away on holiday and used for portable operation. If the antenna is used outside, then in the event of wet weather, the antenna should be covered with a plastic bag.

The antenna arrangement is based on the popular "Slim Jim" design, an omni-directional antenna for 144MHz, designed some years ago by the author. (The original design is still carried in *PW* publication *Out of Thin Air*.)


The method of construction and other modifications have not only allowed a significant reduction in size, but also provide a broader bandwidth, the v.s.w.r. being virtually 1:1 right across the 144MHz band. The antenna design lends itself to very easy matching and minimum v.s.w.r. setting.

Some Technical Details

Current distribution around both the matching section and the folded $\lambda/2$ (half-wave) radiator are illustrated in Fig. 1. The 50Ω cable is connected directly into the end of the matching line, the far end of which "voltage-feeds" the radiating element at its base; the current maximum on this being at the centre.

The angle of maximum vertical radiation for an antenna of this nature, when operated in the near "free space" condition and several wavelengths above ground, is as shown in the

Fig. 1: The electrical arrangement showing current distribution on the matching line and radiator

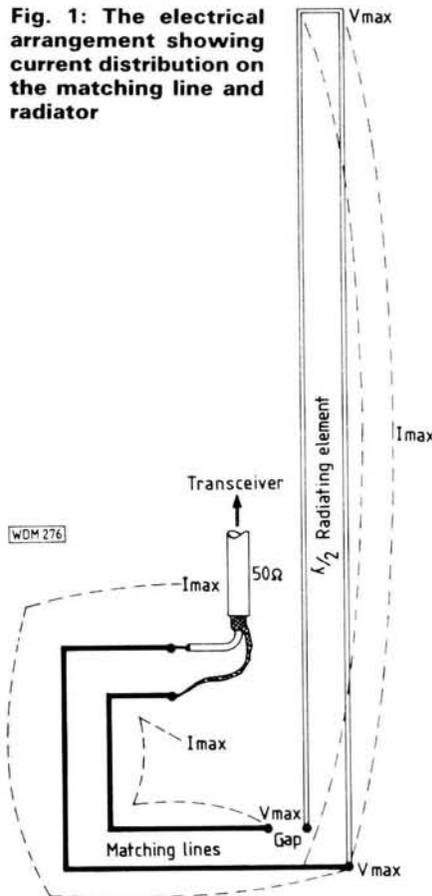

computer print-out Fig. 2. This angle may be a little higher when the antenna is near ground, but probably not greater than 10 degrees (tilt angle in Fig. 2). In the horizontal plane the radiation will be omni-directional and of course vertically polarised.

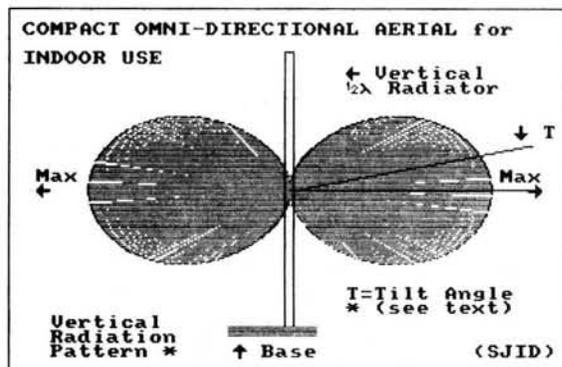


Fig. 2: Vertical radiation pattern of the compact indoor antenna. See text regarding "tilt" angle

The Wire Coat-hangers

These are made of springy metal rod about 2mm in diameter. They generally have a shiny surface and are usually provided free by dry cleaning companies.

(Do not use coat-hangers which have been anodised or coated with varnish.) The rod from which the hangers are made is quite easily straightened out, although any tightly twisted bits can be cut off. One hanger will straighten out to provide more than the length required for one of the radiating element wires.

Construction

The major part of construction is the matching line, which is fixed to the base board as shown in Fig. 3. The author chose a piece of Melamine-faced chipboard for the base of the antenna, to which was added the appropriate edging strip and four small cabinet feet glued on its underside.

The illustration in Fig. 3. shows the positions of the three electrical connector blocks which carry the matching line wires. One of these connector blocks also provides a support and connecting point for the vertical radiating element, which is fitted at the points marked "X". However, before screwing down the connector blocks, cut from one of the lengths of coat-hanger wire the sections that will form the matching line as given in Fig. 4. These are connected, as in Fig. 3, to form a continuous pair of lines between the coaxial cable and the

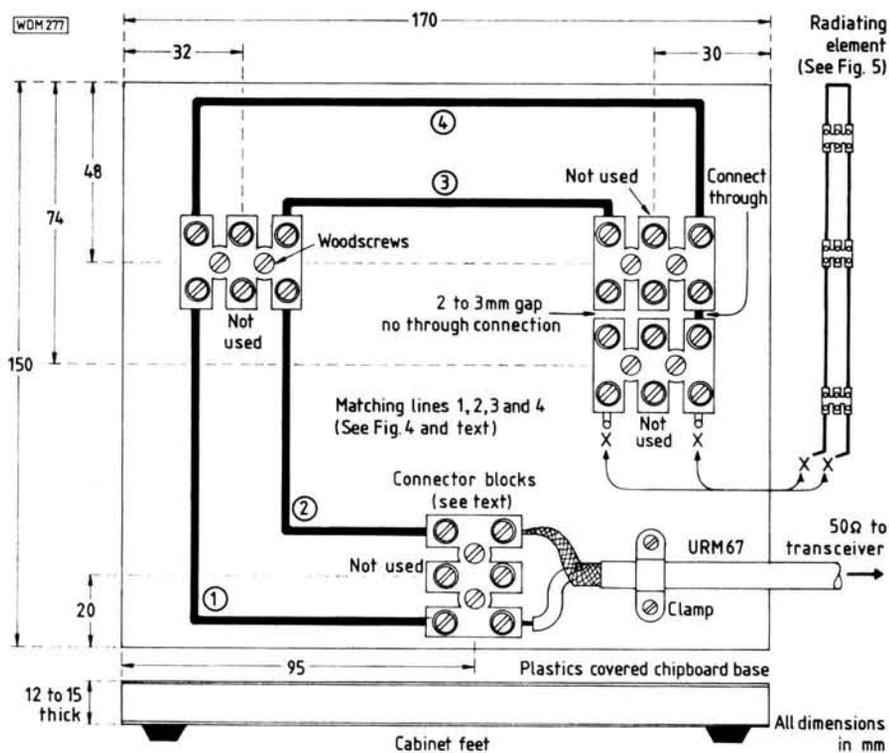


Fig. 3: Layout on baseboard of the matching lines which are comprised of (1 and 4) and (2 and 3) sections. Note the bottom of radiator element wires are secured at (X, X)

Fig. 4: Wire sections 1-4 form the matching lines when assembled as in Fig. 3. Wire section No. 5 is the top section of the radiator and used for v.s.w.r. adjustment, as described in the text



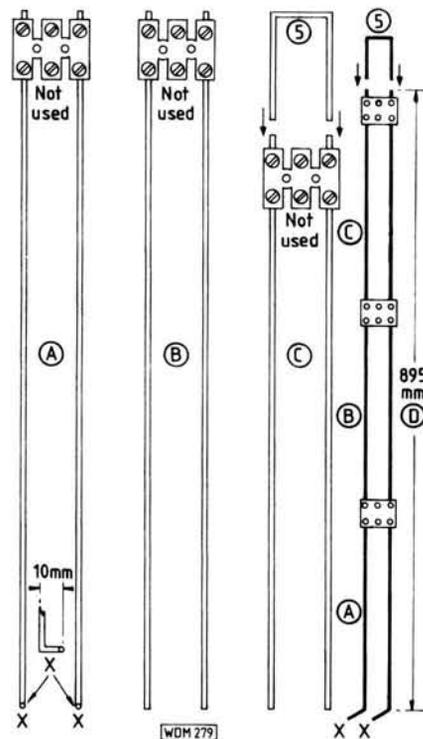


Fig. 5: The radiating element consists of sections A, B and C. Together they form the vertical radiator, with an overall dimension of 895mm. Note including section No. 5. Also note right angle bends at the bottom of section A. These connect to points (X, X) on the base board as in Fig. 3.

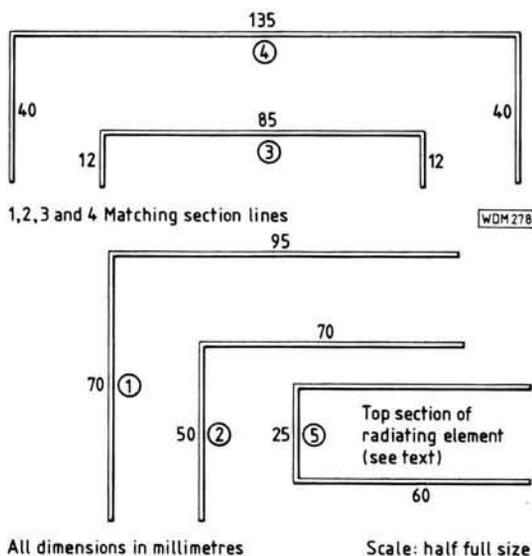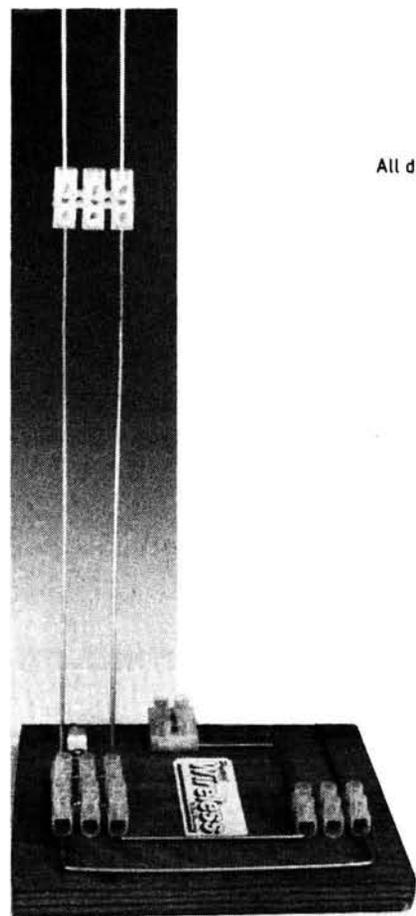

bottom of the radiating element. The positions of the blocks may require shifting slightly to obtain a symmetrical layout. After this has been achieved they may be screwed into place.

Next the radiating element, details for which are given in Fig. 5. The two long wires are cut to the dimensions given, then the electrical connector blocks are fitted. These give the vertical element wires the correct spacing, as well as support and their positioning is not critical. The very top section of the radiator is a separate "U" shaped piece of wire (No. 5 shown in Fig. 4). This part is slotted in to the top connector block, and consequently will provide a small variation in radiator length. With this method of adjustment, the antenna can be made to resonate, allowing minimum v.s.w.r. to be obtained.

The holes through the metal inserts of the connector blocks are large enough to accommodate the tops of the radiator wires in addition to the ad-

justing section. When the screws are slackened off, the "U" shaped section may be moved to give the required length.

Tuning and VSWR

First, a few words about the coaxial cable which must be 50Ω. Low-loss cable such as URM67 would be preferred if the cable run is more than 6 metres long. The lower the cable attenuation, the more r.f. power there will be available for radiation by the antenna. Remember, for indoor operation every little counts, especially when it is realised that brick walls and tiled roofs may offer as much as 10dB attenuation, even when dry. If the cable run is short, i.e., not exceeding 6m, then lower quality URM43 cable could be used.

Final adjustment should be carried out at mid-band (145MHz) with a v.s.w.r. meter in line at the transmitter end. Stand the antenna on a chair or

table and make a quick check on v.s.w.r. It may be a little too high, in which case adjust the top section (No. 5) of the radiator up or down until the v.s.w.r. is brought to within respectable limits, 1.2:1 or lower.

Stand back from the antenna after each adjustment as "body capacity" can affect tuning. Some experimentation may be necessary to find the best position for the antenna, particularly in a ground floor room. Avoid placing the antenna near central heating pipes as well as known, but hidden, runs of house electrical wiring, in fact anything that is conductive in terms of multiple wavelengths.

At very low height, e.g. in a downstairs room, do not expect to work great distances. In this situation local coverage is about the limit. Tests carried out under these conditions showed that reliable contacts with stations using outside antennas could be made over distances of 16km.

Connector Block

The connector blocks used in this project are available as standard with 12 ways and in four different sizes. The smallest are rated for a current of 2A, the next size for 5A, the next for 15A and the largest for 30A. The latter size

is the one used for the antenna. These are 165mm long and 25mm wide consisting of 12 connection inserts. They can be purchased from any dealer of electrical goods and fittings. **PW**

References

The Slim Jim 2 Metre Antenna. F.C. Judd. *Out of Thin Air*. PW Publications.

Multi-wire Dipole Antennas. J.D. Kraus. *Electronics* (13) 26-27 January 1940.

ERRORS & UPDATES

UK Amateur Beacon Datacard May 1988

The callsign/frequency boxes for GB3AND and GB3FRS have unfortunately been arrowed to the wrong sites on the map. GB3AND is at the position shown for GB3FRS, and vice versa.

Apologies to Brian Bower G3COJ for mis-spelling his first name on the reverse of the card.

We have been asked to point out that all UK amateur beacons are co-ordinated by the RSGB and that licences, and site fees and insurance are paid for by the membership.

The Eightypole May 1988

Some readers have used a thinner, lower-voltage rated, 7/0.2mm stranded wire for their Eightypole. To produce the correct winding pitch of 19 turns per 25mm, and therefore the correct inductance, a 1kV rated wire with an overall diameter of 1.2mm must be used.

Getting to Know Your End-Fed $\lambda/2$ Antenna June 1988

The link turn should be wound centrally on top of the main coil, and not alongside it as shown in Figs. 3 and 4. The multiplier 10.1 shown in Formula 1 and 2 should in fact be 101.

LED Brightness Controller June 1988

Since the publication of the original article, the author has informed us that resistor R1 is unnecessary and may be omitted. Once R1 has been removed, renumber all resistors consecutively, starting with the 2.2M Ω as the new R1. The text will then tie in with Fig. 1.

BOOKSHELF


GUIDE TO WORLD WIDE TELEVISION TEST CARDS Edition 2

by Keith Hamer and Garry Smith
Published by HS Publications

Available from Practical Wireless Book Service
147 x 209mm, 52 pages. Price £2.95 plus 75p P&P
ISBN 9504304 0 4 2

Television reception is taken for granted by millions of viewers in many countries and there are now few nations without at least one television service in operation. Colour television is a familiar part of everyday life and some networks are now experimenting with stereo sound television transmission. Continents are now linked by satellites providing instant colour pictures, sometimes direct to domestic installations. All this technology has developed in a relatively short time.

It was on 2 November 1936 that the first, regular high-definition, national television service began from the BBC transmitter at

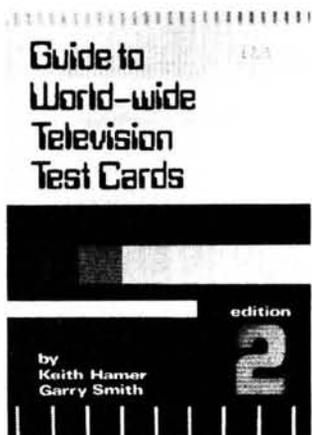

Alexandra Palace in London. In order to check the performance of the transmission network, a simple test card was devised and designated

"Test Card A". This was only used internally by BBC engineers and was not transmitted publicly. Since then television techniques have improved dramatically and various test cards have been designed to enable television engineers and the viewing public to check receiver performance.

With the numerous television services in operation throughout the world, there is a great variety of test cards. The main purpose of this book is to assist long distance television enthusiasts (TV DXers) around the world with signal identification. For

that reason, 240 test cards, identification slides and clock captions have been included.

The illustrations are shown in semi-alphabetical order, with the transmission and colour systems used generally in each country shown in parentheses below each photograph. It is hoped that this book will assist all television DXers in the pursuit of their most interesting hobby. Readers concerned with television graphic work or operators of amateur television stations should also find this publication of particular interest to them.

Now in stock, the latest editions of Klingenfuss *Guide to Facsimile Stations* and *The Air & Meteo Code Manual*. See pages 40-43 for details.

Reading & Understanding Circuit Diagrams

(with a bit of theory thrown in)

Following last month's look at power supplies, R.F. Fautley G3ASG turns his attention to receivers in Part 6.

The circuit diagrams of complete state-of-the-art equipments are complex and very difficult to follow even for those with a technical background and many years of experience. For this reason, it is necessary for the beginner who is anxious to learn, first to understand separately the circuit of each of the many stages and then finally add the bits which link them together.

Receivers fall into two main classes: i: tuned radio frequency (t.r.f.) receivers.

ii: superheterodyne (superhet) receivers. The tuned radio frequency type, which is usually called just t.r.f. will be described first as it is by far the simpler of the two.

The t.r.f. Receiver

The t.r.f., sometimes referred to as the "straight" receiver, usually consists of three parts:

- i: a tuned radio frequency stage, from which the receiver gets its name
- ii: a demodulator (or detector) either non-regenerative or regenerative
- iii: an audio frequency amplifier.

The Radio Frequency Stage

The purpose of this stage is to amplify signals received by the antenna and increase the selectivity of the receiver. The circuit diagram of a tuned r.f. stage is shown in Fig. 6.1. It also includes an active device to amplify the input signals from the antenna (or input signal) terminals and two tuned circuits to provide selectivity.

What's an active device to amplify?, you may ask. That's just a semi-conductor, or valve, used to increase the level of the antenna signal before "detection". In Fig. 6.1., the semiconductor is a field effect transistor or f.e.t. The circuit symbol marked Tr1, is for a junction field effect transistor.

Selectivity perhaps needs explaining. It is the ability to discriminate between signals of differing frequencies and a tuned circuit is the device to do just that. In Fig. 6.1, there are two such tuned circuits: inductor L1 with

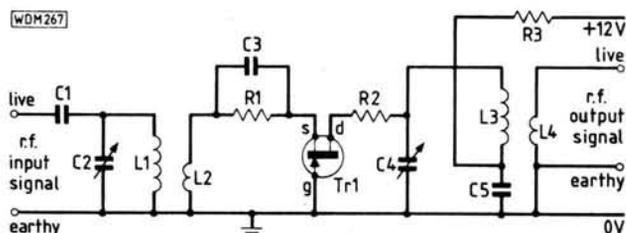


Fig. 6.1: The r.f. stage using a junction field effect transistor (j.f.e.t.)

variable capacitor C2, and inductor L3 with variable capacitor C4. The operation of parallel tuned circuits was described in Part 2. At resonance, the circuit behaves as a very high impedance which is purely resistive. As you go further away from the resonant frequency, either higher or lower, it progressively reduces in value and becomes more and more reactive. Signals from the antenna cause current to flow through both L1 and C2 and at resonance, where the impedance is greatest, produce the highest voltages across the tuned circuit.

Signals at other frequencies also produce voltages, but these voltages get lower and lower the further away from resonance the signals get. Also, the tuned circuit discriminates in favour of the frequency to which it is tuned, i.e. it's "selective". Signals amplified by the f.e.t. are tuned by L3 and C4 to further increase selectivity.

Capacitor C1 affects the "matching" between the antenna and the tuned circuit. "Matching" means transferring signals from one part of a circuit to another with (usually) minimum loss. In this case, it is the relationship between the capacitance values of C1 and C2 which affects the match. A theoretical understanding of this relationship is **not** necessary (fortunately) to understand the basic operation of the r.f. stage. Again, L2 (which is inductively coupled to L1) provides matching from the high impedance of the resonant tuned circuit, L1 & C2, to the lower impedance of the "source" input of the f.e.t. Finally, the output from the f.e.t. "drain" is tuned by L3 and C4. Its high resonant impedance is

matched to a low impedance (quite often about 50Ω) by L4, which is inductively coupled to L3.

Just a little aside here—the actual number of loops used in the circuit diagram of an inductor **does not** indicate the number of turns on the coil, nor does the ratio of loops drawn on two coils inductively coupled indicate the actual turns ratio to be used. The symbols for L3 and L4 together simply represent a transformer with two undefined windings.

Components R1 and C3 provide the necessary d.c. biasing, R2 is a low value resistor to prevent possible parasitic oscillation (usually occurring at v.h.f.) and R3 is used with C5 to prevent r.f. signals straying into the d.c. power source (the 12V supply) where we don't want them.

The Non-Regenerative Detector

The principle use for this type of device is to enable the reception of a.m. (amplitude modulated) signals, such as broadcast stations.

You may remember the crystal set described in Part 2. Well, that was one example of a non-regenerative detector, simply a half-wave rectifier which requires no external power supply for its operation. The difference between a receiver detector and a half-wave rectifier is simple **the use made of its output**.

In the case of the half-wave rectifier, the useful part of the output is the d.c. from the rectifier, the unwanted output being the so-called "ripple" voltage. With the detector circuit, however, the

reverse is the case. The d.c. output is not used (apart from uses as a.g.c. or automatic gain control, which is irrelevant at this time). The bit we really want of the detector output is the formerly discarded ripple, for this contains the transmitted information which we are endeavouring to hear!

Looking back to Fig. 5.5, the ripple voltage was the variation of d.c. voltage across the reservoir capacitor. The input a.c. signal in the detector is the signal from the r.f. amplifier stage, the frequency of which depends on the frequency of the broadcast station. Thus, the high frequency component of the rectified signal is, like the a.c. input to the half-wave rectifier, almost eliminated by the action of the reservoir capacitor. The big difference is that the rectifier input frequency was only the mains frequency (50Hz) whereas the receiver detector would be operating at almost any frequency above about 150kHz.

If we look at Fig. 6.2, it shows the detector output if the reservoir capacitor were to be removed. The high r.f. signal is represented by the close-spaced parallel vertical lines and the heavy line represents the "modulation"—the information (speech or music) that we want to recover from the amplitude modulated transmission to which the receiver is tuned. When a correct value reservoir capacitor is connected, the vertical lines (the r.f. component of the signal) almost disappear, leaving just the heavy line, the audio frequency modulation which we want.

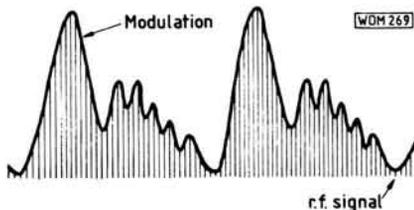


Fig. 6.2: The rectified output from a diode detector without a reservoir capacitor

What is the significance of the difference between mains and radio frequency as the input signal to the detector? The most important difference is that the reservoir capacitor may be many thousands of times smaller than that for the mains rectifier and still provide the same degree of attenuation of the r.f. component of the input signal.

This time, we want the ripple voltage and so the value of the reservoir capacitor has to be more carefully chosen. It must be large enough to remove the r.f. signal voltage, but not so large that it also swallows up the ripple voltage—the bit we want. This is not an awkward problem, for the highest a.f. (audio frequency) signals required to be preserved is about 20 000Hz (for the hi-fi fanatic) and for most broadcast reception only about 5000Hz. The lowest radio frequency to be received is unlikely to be lower than 150kHz (bottom end of the long wave band).

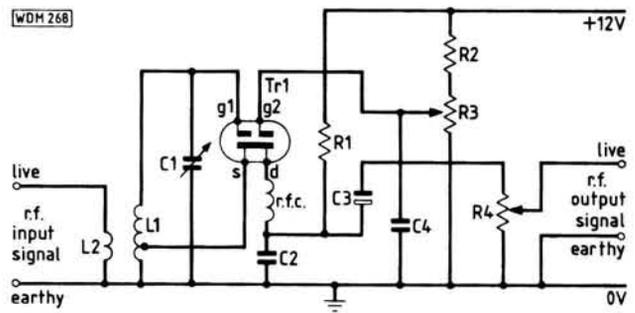


Fig. 6.3: A regenerative detector using a dual-gate m.o.s.f.e.t.

The Regenerative Detector

The principle uses for this type of detector are the reception of a.m. broadcasting stations and c.w. (Morse) transmissions. To an extent, depending on the skill of the operator as very precise tuning is necessary, single side-band telephony can also be resolved.

Another new symbol to be introduced is that for the dual-gate m.o.s. f.e.t. or dual-gate metal oxide silicon field effect transistor. You can see this symbol used in Fig. 6.3. Yet another symbol, for the potentiometer (R3 and R4) needs to be remembered, these can also be seen in Fig. 6.3. Potentiometer R4 is just the familiar volume control (or a.f. gain control) and the use of R3 will be detailed later. By now you should be beginning to understand and recognise at least the component symbols—even if when joined together to form a circuit diagram they still appear to be rather vague!

Any regenerative detector is really an amplifier with just enough positive feedback (output signal fed back to the amplifier input in additive phase) for the circuit to be just on the verge of oscillation. This is the optimum condition for reception of a.m. signals. If the amount of energy fed back is increased very slightly so that oscillation just occurs, c.w. signals will pop out of the noise and a whole new world of signals will be received. This problem is outside the scope of this series, however!

Now to add a bit of circuit description. The r.f. input signals, either directly from the antenna or from the output of an r.f. amplifier like Fig. 6.1, are tuned by L1 and C1 and connected to one of two gate terminals, gate 1. Matching from the low impedance output of the previous stage to the high impedance of the gate input is provided by the inductively coupled L2 and L1. The tuned circuit L1 and C1 increases the overall selectivity still more, but what about the tap on L1? What does that do?

The tap enables a part of the output to be fed back in the correct phase to the input so as to cause the stage to oscillate. At least, it will if the gain of the stage is at least unity.

The gain of the f.e.t. is controllable by varying the d.c. potential applied to gate 2 of the device. So, by carefully

setting that voltage, the gain can be made just sufficient for the stage to be on the verge of oscillation, which is the condition required for optimum reception of a.m. signals. The voltage is made variable by adjustments of R3, the regeneration (or reaction) control.

Now, a bit more theory. One effect of regeneration, or positive feedback, is that **negative resistance** appears at gate 1, and also across the tuned circuit L1 and C1. Negative resistance? Well, the ordinary resistance we associate with resistors and tuned circuits at resonance (high for parallel, low for series), although not usually referred to as such is really **positive** resistance. So **negative** resistance must be the opposite. We can't buy a negative resistor as a component, but the **effect** of negative resistance can be produced by positive feedback. The signal fed back increases the amplitude of the original input signal which is also what would happen if the resistance of L1 were to be reduced.

So, positive feedback has the effect of reducing the resistance of the coil. How does this help with reception? Well, if the coil resistance is reduced then the Q of the tuned circuit is increased. Again, something new to contend with. What is meant by the Q of a tuned circuit? It is the ratio of the reactance of the inductor (or for that matter the reactance of the capacitor) to the value of the inductor's resistance. Usually the resistive component of the capacitor is ignored as it is so very small compared to that of the inductor. The Q of a coil is often called the "goodness factor" of the coil.

Why is Q so important? There are two reasons: one is that the higher the Q of the inductor, the higher is the resistance of the tuned circuit at resonance and so the higher the signal voltage developed across it; the other is that the higher the Q , the greater is the selectivity of the tuned circuit. Now you can see why it is referred to as the goodness factor.

The equation for the Q of an inductor is:

$$Q = \frac{X_L}{r}$$

where:

X_L is the reactance of the coil in Ω and r is the resistance of the coil in Ω

In the equation, the symbol "r" refers to the r.f. resistance of the inductor. At very low frequencies this value is close to the value measured at d.c. by an ohmmeter, but at high frequencies this can be considerably larger and depends on the physical shape of the coil as well as the thickness of the wire.

What about a numerical example? Assuming:

f=frequency of operation=14MHz
 r=resistance of the coil at 14MHz=4Ω
 L=inductance of the coil=5μH
 X_L=reactance of the coil=2πfL

First, determine the reactance of the inductor at the operating frequency.

$$X_L = 2\pi fL$$

$$= 2\pi \times 14 \times 10^6 \times 5 \times 10^{-6}$$

$$= 440\Omega$$

Now calculate the value of Q.

$$Q = \frac{X_L}{R}$$

$$= \frac{440}{4}$$

$$= 110$$

It is obvious that if the resistance of only the coil is reduced, then the Q of the coil will be increased. Now, if

positive feedback has the effect of providing negative resistance to the tuned circuit, the effect will be that the original positive resistance of the coil will be reduced, and the Q increased.

Another relationship necessary to appreciate is that between Q and the effective parallel resistance of a tuned circuit at resonance. It has already been explained that, at resonance, the impedance is that of a high resistance, but how high? The resistance of a parallel tuned circuit at resonance is given by:

$$Z_{res} = X_L \times Q$$

where:

Z_{res} is the resistance at resonance in Ω
 X_L is the reactance of coil at resonant frequency in Ω and
 Q is as expressed previously

Thus:

$$Z_{res} = X_L \left(\frac{X_L}{r} \right)$$

Or

$$Z_{res} = \frac{X_L^2}{r}$$

Now, what about selectivity? How does the Q of an inductor affect the degree of selectivity or sharpness of tuning (sometimes called "stiffness" of tuning)?

An expression for the degree of selectivity is:

$$\frac{A_0}{A} = Q \times Y$$

where:

A₀=voltage gain at f₀
 A=voltage gain at f

$$Y = \left(\frac{f}{f_0} - \frac{f_0}{f} \right)$$

f₀=resonant frequency in MHz
 f=some other frequency above or below f₀ in MHz

Voltage gain refers to the output voltage from a stage for a constant input voltage at any frequency.

From this it can be seen that the higher the value of Q, the lower will be the voltage developed across the tuned circuit at frequencies away from resonance, which is the requirement for increased selectivity.

Conclusions

The smaller the resistance of an inductor the greater is its Q; thus the greater is the effective resistance of a parallel tuned circuit, and also the greater is the tuned circuit's selectivity.

Next month we'll finish the t.r.f. and look at the superhet receiver

ANTENNA BOOKS SPECIAL OFFER

Interested in Antennas?

Then why not invest in our special offer package, **saving £4.00** on our usual mail order price. These three books for £13.95 including P.&P. Order as PWBO1, from:
 PW Publishing Ltd., FREEPOST, Enenco House, The Quay, Poole, Dorset BH15 1PP.

THE RADIO AMATEUR ANTENNA HANDBOOK
 Extra! Data for the 3 new ham bands!
 All dimensions, "Push, Taper, Ratio beams"
 Vagi, Quad, Gulp and LBY beam antennas
 Vertical, horizontal and "stopper" antennas
 How to judge your radio location, best DX
 antenna height, ground loss and radials
 All about towers and masts too, plus
 information which the SWL reader tells you

WILLIAM I. ORR, W6SAI
STUART D. COWAN, W2LX

WIRES & WAVES

EXTRA! DATA FOR THE 3 NEW HAM BANDS!
 SIMPLE, LOW-COST
WIRE ANTENNAS
 FOR RADIO AMATEURS

Easy! How to build efficient antennas that get out - 2 through 160 meters!
 How to build secret "invisible" antennas for use in difficult station locations!

WILLIAM I. ORR, W6SAI
STUART D. COWAN, W2LX

0202 678558

VISA

publication

Offer limited to UK and BFPO addresses only, while stocks last.

Three Keys in One

J. Worthington GW3COI, a diehard c.w. user, wanted a circuit that retained the individuality of the operator's hand when using bug keys.

I was discussing the relative merits of the mechanical bug key and the iambic or plain electronic model with a friend. Like myself, he is a diehard c.w. user. We agreed that the former, although more difficult to use because of its need for hand-made dashes and possibly more tiring too, was unique in allowing its operator to emphasise certain letters and words when the occasion arose. For instance, when you wish to penetrate heavy QRN it is known that longer dashes are more easily read. Then again, if you wish to get a certain number or name across first time it is always politic to slow down and "emphasise" the letters in a way that only can be done on "up and downers" or mechanical bugs. I appreciate an electronic key can be slowed down, but it is awkward to do so just for one word and the result is somehow never as satisfactory.

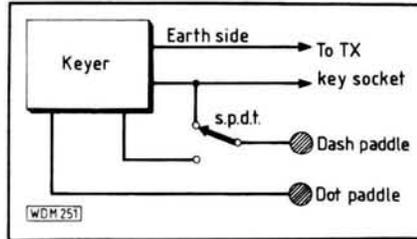


Fig. 1: The wiring in of the single-pole two-way switch that transforms your Morse key

My friend then went on to say that he was thinking of swapping his el-key for a bug as, "it would allow him better to express his individuality". At this I was slightly disturbed as I knew he tended to favour "Baghdad" Morse which, after giving the recipient a good laugh, goes on to make him reach for the off switch as it so distorts the proper code. Reactions to receiving

this kind of Morse can be strong and various.

Perhaps it was the spur of this which produced a simple idea—it had to be simple because my friend is largely an "operator" type amateur who thinks a test meter is what umpires use at Lord's. It will be seen from the diagram that the wiring in of a single-pole two-way switch is all that is required to transform an el-key into an instrument that will perform as a mechanical bug by enabling the operator to make dashes; to act as a sideswiping hand key on the dash paddle and, of course, in its original role of an electronic Morse maker.

As a final bonus, in the "mechanical" position, it allows the operator to send a long dash for tuning purposes—a system which has finer control in obviating over running of p.a. stages! **PW**


Theory

The MISFET— A Challenge to the Power MESFET?

The gallium arsenide m.e.s.f.e.t. (metal-semiconductor f.e.t. or metal Schottky f.e.t.) is one of the best microwave amplifier devices which has yet become commercially available for both small-signal and power amplification. In this article, Brian Dance looks at a new device which takes power amplification a step further.

The performance of m.e.s.f.e.t.s at higher frequencies has improved as devices with smaller gate lengths have been produced. However, recent work has shown that the m.i.s.f.e.t. (metal-insulator-semiconductor f.e.t.) fabricated in gallium indium arsenide has some potential advantages over the gallium arsenide m.e.s.f.e.t. for power amplification. This has stimulated efforts to produce practical m.i.s.f.e.t. devices suitable for microwave applications.

The m.i.s.f.e.t. has the structure shown in Fig. 1, with an oxide gate insulation. As the gate breakdown is controlled by the insulator thickness and the dielectric strength and not by the semiconductor material, the channel doping can be optimised independently of the gate breakdown. The linearity of the m.i.s.f.e.t. is better than that of the m.e.s.f.e.t., since the input capacitance of the m.i.s. gate is less affected by the r.f. drive than in the

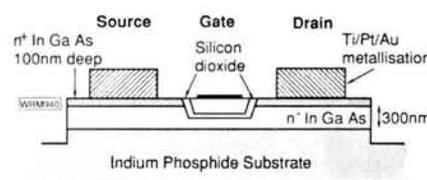

case of a Schottky gate. Linearity is also improved because the m.i.s.f.e.t. can operate with zero bias on the gate.

The gallium indium arsenide, actually $\text{Ga}_{0.47}\text{In}_{0.53}\text{As}$, has the highest electron mobility of any room temperature semiconductor material. It cannot be used for making satisfactory Schottky contacts for m.e.s.f.e.t.s, as the barrier height to metals is too low, resulting in low breakdown voltages and high leakage currents.

The gallium indium arsenide used to make m.i.s.f.e.t.s is lattice matched to the indium phosphide substrate. Silicon dioxide is deposited at a low

temperature (75°C) for gate insulation using a self-aligned gate approach to minimise the gate overlap capacitances which can impair r.f. performance. The gate length used has been 1µm (micrometre).

Outputs of 857mW at 4GHz (power gain 12.7dB), 424mW at 12GHz (gain 7.2dB), 415mW at 20GHz (gain 3.0dB) and 114mW at 32.5GHz (gain 3.1dB) have been produced by m.i.s.f.e.t.s of this type. Extrapolation of the performance at about 10–20GHz to higher frequencies indicates a cut-off frequency of about 45GHz (maximum frequency of oscillation).

It is expected that considerable improvements in performance will be obtained by fabricating gates of sub-micrometre dimensions. The m.i.s.f.e.t.'s high resistance to ionising radiation will be of considerable importance for military applications, where the devices may be used in a nuclear environment. **PW**

READ ALL ABOUT IT!

IN THE SUMMER '88
Cirkit CATALOGUE

TOOLS £173

PCBs & MATERIALS £95

CONNECTORS £51

KITS & MODULES £131

HARDWARE £73

BOOKS £17

SEMICONDUCTORS £109

TEST EQUIPMENT £153

Cirkit
electronic construction
£££s worth of
many new products

FREE!
Digital clock with
orders over £50.00

competition
prizes
dispatch from
lines

Discount vouchers, competition, free gift and, of course, the latest new products. Available at your newsagent or direct from Cirkit at the address below.

Cirkit

PRICE £1.30



Cirkit Distribution Ltd.

Park Lane, Broxbourne, Herts EN10 7NQ
Telephone (0992) 444111 Telex: 22478

MAKE YOUR INTERESTS PAY!

More than 8 million students throughout the world have found it worth their while! An ICS home-study course can help you get a better job, make more money and have more fun out of life! ICS has over 90 years experience in home-study courses and is the largest correspondence school in the world. You learn at your own pace, when and where you want under the guidance of expert, personal tutors. Find out how we can help YOU. Post or phone today for your **FREE INFORMATION PACK** on the course of your choice. (Tick one box only!)

Electronics	<input type="checkbox"/>	Radio, Audio and TV Servicing	<input type="checkbox"/>
Basic Electronic Engineering (City & Guilds)	<input type="checkbox"/>	Radio Amateur Licence Exam (City & Guilds)	<input type="checkbox"/>
Electrical Engineering	<input type="checkbox"/>	Car Mechanics	<input type="checkbox"/>
Electrical Contracting/Installation	<input type="checkbox"/>	Computer Programming	<input type="checkbox"/>
GCE over 40 'O' and 'A' level subjects			<input type="checkbox"/>

ICS

Name _____ P Code _____
Address _____
International Correspondence Schools Dept EES 88, 312/314 High St., Sutton, Surrey SM1 1PR. Tel: 01-643 9568 or 041-221 2926 (24hrs).

QRP KITS AT QRP PRICES!

80m CW TRANSCEIVER, DTR3

Compact and lightweight, an ideal QRP rig for 3.5MHz CW. Great for IP and holiday operation!
A COMPLETE KIT! - Includes ALL Hardware, VFO, Audio Filter, RIT, Sidetone etc. and fully detailed building instructions.

£76.25 including postage.
Also included in our Kit Range:

	FULL KIT	PART KIT
"CARLTON" 3 Band RX for 80/40/20m	£63.00	
TU1 Antenna Tuning Unit	£31.75	£22.50
TU2 : ATU with SWR Bridge	£39.65	£30.40
TUA1 : SWR Bridge	£11.50	£ 8.90
AF2 AUDIO FILTER	£11.50	£ 8.50
AF3 BASIC AUDIO FILTER BOARD	£ 6.90	
CM1 CAPACITANCE METER	£22.60	£14.00

REMEMBER! The "FULL" Kits are COMPLETE in every detail and come with FULL Instructions. The "PART" Kits consist of the PCB's and all board mounted components plus, of course, the detailed Instruction Manual.

All prices include postage.

For full details of these and the rest of our range, send a SAE to:

**LAKE ELECTRONICS, 7 MIDDLETON CLOSE,
NUTHALL, NOTTINGHAM NG16 1BX.**
or ring Alan, G4D VW on (0602) 382509

J. BIRKETT

RADIO COMPONENT SUPPLIERS



**25 The Strait
Lincoln, Tel. 20767
(LN2 1JF)
Partners J.H.Birkett.
J.L.Birkett.**

EX-MILITARY COMMUNICATIONS RECEIVER R210

Frequency 2 to 16MHz in 7 Switched Bands AM, CW, SSB. Aerial Inputs 80 ohm Balanced Line, Long Wire or Whip, CW Filter, BFO, Noise Limiter, complete with 240 Volt AC Power Pack, Loudspeaker in Case and Pair of Lightweight Headphones. £79.80 Carr. £8.00

AIR SPACED VARIABLE CAPACITORS 200 + 350p.f. with Slow Motion Drive £2.50, 350 + 400 + 35 + 35 + 35p.f. with Slow Motion Drive £1.95, 10 + 10 + 20p.f. Direct Drive £1.50, 125 + 125p.f. Direct Drive £1.95.

MULLARD X BAND GUNN OSCILLATOR MODULE CL8630 £9.95.

RECTANGULAR LEDS 15 for £1.00, 0.2" LEDS Assorted Colours 20 for £1.00.

CRYSTAL FILTERS 1.4MHz BW 2.4KHz Upper and Lower Side Band £11.95 Pair.

SEI CRYSTAL FILTERS OC1246MIB 10.7MHz BW 7.5KHz £2.95.

SEI CRYSTAL FILTERS OC1121A 10.7MHz Channel Spacing 25KHz £5.00.

TUBULAR TRIMMERS 0.5p.f. to 3p.f. £30p each.

RF POWER TRANSISTORS PT9787 8W, 30MHz £7.95, PT8788 20W 30MHz £9.95, BLX92A 6W 470MHz £6.95, TPV593 UHF No Details UHF £3.95, 2N3866 £85p, BFW16A £75p.

CERAMIC TRIMMERS 4 to 20p.f., 7 to 35p.f., 10 to 60p.f. All £20p each.

1 MA METERS Lightly Damped 10cm x 5cm Approx £2 for £2.50.

DISC CERAMICS 0.01uF 20wV 100 for £1.15, 330p.f. 100wV 500 for £1.95, 100p.f. 100wV 500 for £1.95.

AIR SPACED TRIMMERS 5p.f. £35p, 10p.f. £50p, 22p.f. £55p, 35p.f. £60p, 57p.f. £85p, 100p.f. £95p, Differential 10 + 10p.f. £50p, 30 x 30p.f. £85p.


MULLARD FM TUNER MODULE LP 1169 88 to 108MHz £3.00.

WOOD AND DOUGLAS AND C.M.HOWES KITS AVAILABLE BY POST AND FOR CALLERS. ACCESS AND BARCLAY CARDS ACCEPTED, P.P. 60p UNDER £5, OVER FREE. UNLESS OTHERWISE STATED.

SPECIAL NOTICE TO READERS

Although the proprietors and staff of *PRACTICAL WIRELESS* take reasonable precautions to protect the interests of readers by ensuring as far as practicable that advertisements in *PRACTICAL WIRELESS* are bona fide, the magazine and its Publishers cannot give any undertakings in respect of claims made by advertisers, whether these advertisements are printed as part of the magazine, or are in the form of inserts.

While the Publishers will give whatever assistance they can to readers having complaints, under no circumstances will the magazine accept liability for non-receipt of goods ordered, or for late delivery, or for faults in manufacture. Legal remedies are available in respect of some of these circumstances, and readers who have complaints should address them to the advertiser or should consult a local Tradings Standards Office, or a Citizen's Advice Bureau, or their own solicitor.

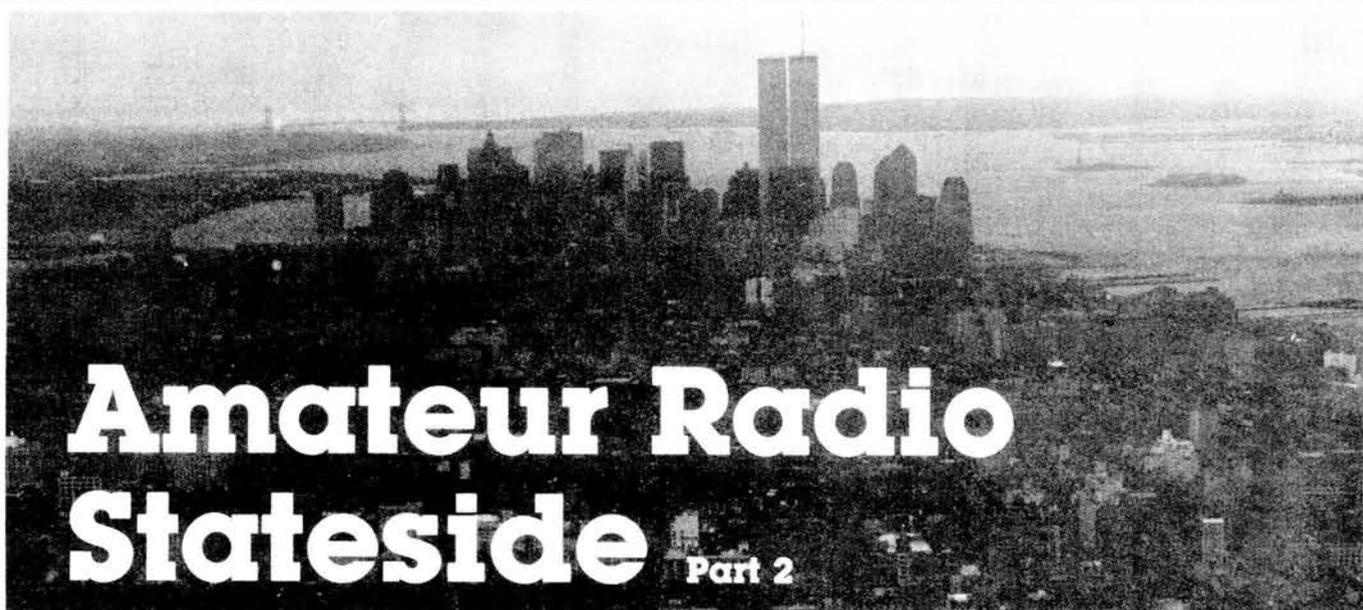

Amateur Radio Stateside

Part 2



Last month, we left David Jardine G0FDV hovering on the steps of the ARRL Headquarters in Hartford, Connecticut. This month, he concludes his visit to the USA with details of what goes on behind the doors.



A Little History First

The ARRL was founded in 1914 by Clarence Tuska and Hiram Percy Maxim (he of the Maxim Silencer fame). When World War I broke out, amateur radio was just getting started in the USA. Obviously all licences were suspended at this time, in common with most of the world. Many amateurs joined the services, providing a valuable source of radio skill. After the war ended, amateur radio was still banned in the US, yet many of the former operators couldn't wait to start again.

Hiram Percy Maxim called the pre-war League's officers together and then contacted all the old members who could be found in order to re-establish amateur radio. Maxim went to Washington DC and, after a huge effort, he cut his way through lots of red tape and amateur radio was re-opened on 1 October 1919.

The ARRL Nowadays

They're a friendly crowd at the ARRL HQ. The plush offices, out on Main Street, house the entire ARRL staff, the memorial station and even the editorial and typesetting staff for the organisation's publications.

The fully equipped electronics laboratories housed there are very comprehensive. The staff build prototypes and test the latest rigs on the market for the ARRL publication *CQ*. They have metal cutting equipment to make the chassis for projects and even wind their own coils. There is an r.f. proof room for testing receivers, because of the adjacent wattage from the WIAW transmissions!

WIAW was the callsign used by Hiram Percy Maxim, the first ARRL President, and now it's the callsign for the Memorial Station. This year (1988) sees the 50th anniversary of the Memorial Station.

Twenty-six one-hour code practice sessions are transmitted each week for listeners who are learning Morse code or just improving their proficiency in it. Each of these transmissions is made **simultaneously** on at least six h.f. frequencies as well as 50 and 144MHz and the OSCAR-10 satellite when it is in range. Another twenty-six transmissions go out each week on c.w. (at 60 w.p.m.), Baudot, 110 baud ASCII and AMTOR FEC mode.

Then, there are the fourteen voice transmissions. These are bulletins containing the latest news from the FCC and elsewhere pertaining to amateurs in general, news of special interest to Canadian amateurs, a propagation forecast (updated weekly) that is one of

the best in its field, as well as daily updates on the positions of the various amateur and weather bureau satellites.

Other specialised transmissions include a weekly DX bulletin giving the latest information on where and when to find the rare countries, a weekly transmission on Baudot reporting the latest news from Region II of the IARU and a bi-weekly listing of up-to-date Keplerian elements for the amateur and weather satellites.

One of the high points for WIAW in recent years was in December 1983 when the station contacted astronaut Owen Garriot W5LFL in the *Columbia* Space Shuttle. Most local TV and radio stations were present, plus some of the National ones. Owen responded to WIAW's call... "WIAW this is W5LFL", this caused spontaneous applause from the onlookers.

The Grenada invasion by the US also gave WIAW some extra publicity in the news media. This was because



ARRL Headquarters in Hartford, Connecticut

the only source of information from Grenada was the amateur radio transmission from one of the medical students. Similarly WIAW has been used considerably for communication and relief efforts in various corners of the globe—especially in the Mexican Earthquake.


WIAW is active from 8am to 1pm (Eastern Time) Monday to Friday as well as 3.30pm to 1am on Saturday and Sunday. The visitor operating positions are available for use between 1 and 4pm weekdays and when time is available between the scheduled transmissions.

UK licensed amateurs are welcome to operate WIAW during these “off times”. If you want to operate, however, be sure to have your reciprocal US Licence with you. Details of how to obtain this can be had from the RSGB.

They have equipment for 1.8MHz right up to 1296MHz available, using either c.w., phone, Baudot, ASCII or AMTOR. I noticed they use a Yaesu FT-767GX, subsequently amplified by gigantic linears. The code practice and bulletin station consists of three Alpha 77DX amplifiers, which put out 1500 watts each on 14, 7 and 3.5MHz, along with 600 watt amplifiers on 21 and 28MHz. High power stations are available for 1.8, 50 and 144MHz. There is also a complete satellite station.

There are four operating positions set up for use by visiting amateurs. One features a Collins KWM380 transceiver with a Henry 2kW linear amplifier. A second uses a Kenwood TS-820 with a Collins 30L1 linear amplifier, a HAL DS3100-ASR for Baudot and ASCII and keyboard c.w. as well as an AEA AMT-1 AMTOR terminal unit.

The third position, for low power operation, uses an Icom IC-751. Finally there is the v.h.f./u.h.f. and satellite station. This consists of Icom transceivers for 50, 144, 430 and 1296MHz, along with a Tempo 2000 amplifier for 144MHz and an ARCO amplifier for 435MHz. A video monitor displays the locations of the various satellites and

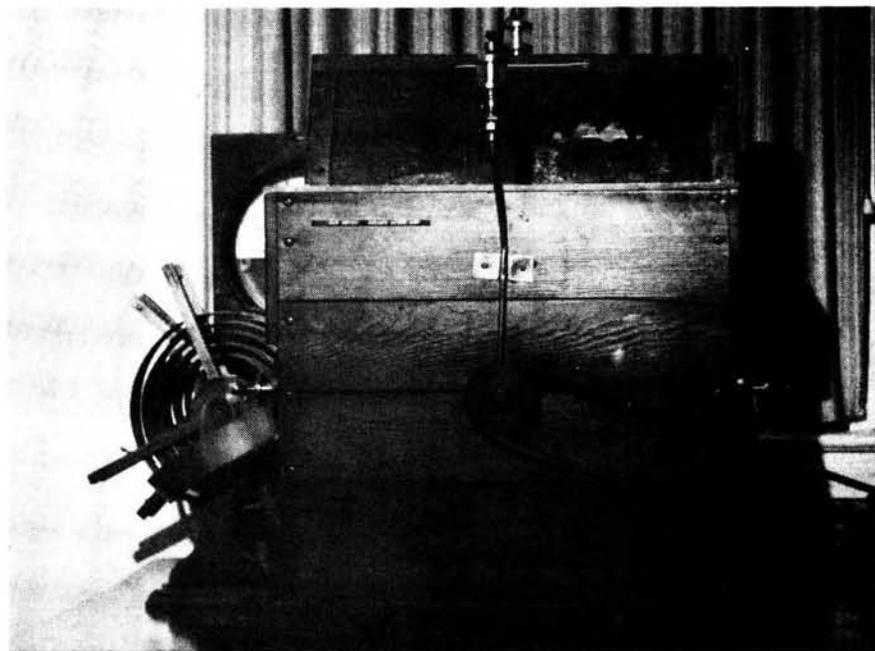

Hiram Maxim's earliest spark gap transmitter

provides azimuth and elevation bearings when they are in range.

For a description of the impressive antenna farm at the ARRL HQ, I can do no better than quote *Popular Communications* from their September 1986 issue.

“The rhombic and 80 metre dipole first erected in 1936 are still in use. A 120 foot tower supports two 4-element 20 metre Yagis, one at 60 feet and the other at 120. The top beam is rotatable, while the lower one is fixed at 285 degrees to maximise US coverage. The beams are operated in phase for code practice transmissions and bulletins, but each one may be fed separately for general operation. At the 90 foot level, there is a 2-element 40 metre Yagi, also aimed at 285 degrees. The top of the tower supports the centre of a 160 metre inverted V and a four-bay vertical dipole array for 2 metres. In addition, there are three 60 foot towers. One supports a five-element 10 metre beam and a six-element 6 metre beam and another holds a five-element 15

metre beam. The third is for the satellite station, and sports circularly polarised Yagis for 2 metres and 70cm, and an ‘H’ Yagi array for 1269MHz. A general purpose dipole, used primarily on 40 or 30 metres, completes the antenna set-up.”

Conclusions

The USA has a tremendous amount to offer. Before you say it's too expensive, you may be interested to know that in 1987, Continental Airlines offered 2-day packages at around £200 (including air-fare and accommodation).

There are other package deals too, and if you can incorporate a trip to the ARRL as I did, then it's worth it. Most continental airlines serve Hartford, Connecticut through Bradley International Airport. Once there, Amtrak provide a rail service and there are bus services available from Greyhound and Continental Trailways. So you can see, getting around once you're there isn't too difficult.

My thanks must go to a few special people, without whom my trip wouldn't have been so enjoyable. My host at ARRL HQ was Bruce Williams WA6IVC, the Ad. Manager, then there was John Hunter K2VKA who played “host” whilst I was in the USA. I mustn't forget all those amateurs I met without whose help, friendship and enthusiasm this article wouldn't have been written. **PW**

Census of Amateur Radio Licences in the USA (1987)

Novice Licence	87 943
Technician Licence	89 835
General Licence	120 307
Advanced Licence	99 881
Extra Licence	40 486
Club Licence	3394
Military Licence	290

Total 442 136



ARRL Headquarters—reception and radio museum

On The Air

On The HF Bands

Reports to Paul Essery G3KFE
287 Healy-Coleg, Vaynor, Newtown, Powys SY16 1AR

Another month and another crop of mail. For part of the time at least, the summer's weather made the lower bands very noisy. My tri-bander is back in the air and the rotator "does its thing" even though I seem to have acquired a slight list to port when comparing beam with stub mast. Well—I never did like things too regimental!

Sunspots

Since we hit bottom in autumn 1986, the rise has been pretty quick; the upward movement is always faster than the decay, but when I heard one knowledgeable observer hinting we may reach the peak as soon as autumn 1988, I reached for the calendar—odd, isn't it how, as one gets older so the years fly faster. But my own guess is probably a year further on—say autumn 1989.

What's Happening

As always, too much happens at short notice; to get a grip on this one needs to subscribe to the RSGB's *DX News Sheet* or one of the other weeklies, such as *The DX Bulletin*, PO Box 50, Fulton, CA 95439, USA. Some efforts are at too short notice for even these! One could wish that many more operators would pass the word on as to their plans that much earlier.

Chagos activity from W4QM, operating as VQ9QM, is down for the next several months. However, the new QTH is near the BC station, so Top Band operation may turn out to be impractical.

The Soviet withdrawal from Afghanistan and the injection of some 100 UN observers, some known to be Finnish licensed amateurs, indicates that if you come across a 4U/OH, you should snaffle it quick.

As for the Russian Vietnam rumours, the story seems to be that several Soviet amateurs are attending some "do" there in October; they have applied for licences but have at the time of writing not received a reply.

Comments about the 3DA0 prefix from Swaziland, it seems the half series 3DA-3DM were allocated to Swaziland, the other half 3DN-3DZ to Fiji. Thus the 3D6 and 3D2 prefixes are in fact ambiguous. So, the Swaziland authorities are in the thick of it in issuing calls beginning 3DA plus a digit and suffix. I gather that the issue of half-series is likely to become more common as the demand for call signs increases.

Hints about Spratly recur; but knowing that China, Vietnam, Taiwan, Malaysia and the Philippines all lay claim to parts of the area, I would think the chance of any operation that would be acceptable in DXCC terms is in the hen's teeth category.

Reverting to China, the word goes round that licensing in that country will become easier very soon—perhaps by the time this reaches you. BW will be the prefix for foreign operators; BG for individual Chinese stations, BY for clubs and BT for special event stations.

The comic situation in Thailand continues. Amateur Radio is now legal, but there are no licensed amateur stations—not

even HSOA and HSOB. The foreign amateur element is built in to the new rules but only with those countries with which reciprocal licensing **will be negotiated**. It is understood that at the time of writing only Spain, Chile and USA have opened negotiations on this.

That KK4AJ Andorra activity came unstuck, at least partly. Dr. Wayne Tope got there, but the gear apparently didn't survive the trip. Nothing much heard since on this one.

Insurance Contacts

Some considerable discussion on this subject, sparked by Berk SP6RT to some extent. There can be no doubt that people who make insurance QSOs are time-wasters—but having said that, there is no doubt in my mind that the business of using two letters as a call instead of the complete call sign, and of the DX station rarely if ever mentioning his own call, almost guarantees ambiguity. If every one in a pile-up used their complete call sign, if the DX came back each time with a complete call sign, very little time would be lost, but 90% of the ambiguity would disappear. I have a shrewd suspicion that the number of contacts that don't QSL to a DXpedition is more than anything else a measure of the number of questionable QSOs: people who entered the DXpedition log but either weren't on the band at all at the time or who thought the DXpedition was working someone else. One would hazard a guess that maybe 20% of the entries in a DXpedition log are questionable; and the corollary is that a similar percentage think they have worked the chap and exchange cards when the real QSO was with someone else.

Letters

First, a letter from **Mike G3SED** (Horn-dean). He notes that there are now two beacons on Ascension Island, ZD8HF on 28.292MHz with 50 watts r.f. out and ZD8VHF which puts the same power out on 50.0325MHz. On 28MHz the beacon has a vertical, while on 50MHz a 5-el Yagi or a vertical can be selected. The keyer sends the appropriate call sign, followed by the Ascension locator I122TB, then six letter "A"s and the call sign again. This last portion is repeated twice more before repeating the whole message. The same keyer is used on both bands, save for the slight difference in call sign, and keying is therefore essentially synchronous, enabling arrival-time differences to be measured. Funding for the v.h.f. beacon was by the UK Six-Metre Group, while the 28MHz one was funded by ZD8MB, J4JCC, G3SED and G3JVL. Since they went on line on May 4, these beacons have been audible till 0100 in the UK.

**The next three
deadline dates are:
July 27, August 31
& September 21**

On that same day, the first Sporadic-E opening of the year showed on 50MHz; 9H1FL is known to have raised G3JVL, G3SED, G3DEZ, G4DBL/A in Wiltshire and G3GLK on the Isle of Wight. On May 6 a large Aurora opening occurred and G3SED worked GM1LUZ, GM8COX, GM8BZX, G1PAM (Salop), G0JHC (Preston), GM6VXB, GM3WIL, GM0FWV, PA2VST, G3FDW, G18YDZ, G1MEJ and GM4DGT.

A similar number of stations were heard later the same evening when a Sporadic-E opening occurred. It yielded contacts with LA6QBA, 9H1CG, GM4UPL, 9H1BT and beacons noted being 9H1SIX, GB3RMK, CTOWW. In addition there were cross-band QSOs to SM7DAA and DL4DMQ.

Next, we turn to the report from **G3NOF** (Yeovil). Don found 28MHz somewhat patchy, with short-skip in the main. Between 0700-0900 he often found the short path to Asia, Australia and Japan was quite "giving"; Africans were heard in the mornings and the afternoons and S. Americans around the afternoon and evening slots. Don made s.s.b. QSOs with AX9NKG (Christmas Is), I0NLD/5H3, JA5QJD, RH8AD, TR8JLD, WP4AZT, XQ6CFE (=CE) and YU1FAG/5N0.

Turning now to 21MHz, Don found the JA short path open between 0600 and 1900, occasionally to 2300. The same path has also been good to Asia from 0700, with Pacific signals KH6, FK, KX, between 0800-1000, YB/YC at various times 1100-1800, Africans came in between 1000 and 1900, and the US evident between 1100-2300; The West Coast signals peaked between 1600-1800.

Contacts using s.s.b. were booked in with A71BJ, AL7HX, AX9NKG, BT0ZML, BY4RB, C18C, C18CW, FK8EB, FK8FR, FK0BA, HK6ISX, HL1AQB, HL1ASN, HL2INX, HL5BLI, many JAs, KA2CC, KL/CUS, KL7XD, KX6DC, NP4Z, OE1RUA/YK, PJ6/KV4AD, PY0FF, S79LB, UA0FF (Zone 19), UA0QBS (Z19), UA0SKL, UA0UF, U18BBV, UW0LAP (Z19), UZ0AWB, UZ0QWB, YC1QL, YJ8NJS, ZD8MG, ZS3BI, 4F1BYN (=DU), 3D2MP, 7J6AAI (=JA), 5N9GM, 8A7ITU from Indonesia, 8J4XPO (JA), 9K2KW and 9N1RN.

As for 14MHz, G3NOF reports it as having DX at all sorts of hours round the clock. Good conditions were noted from the Pacific from the North and good long-path VK/ZL plus W6/W7. Around tea-time there have been good short-path Asian openings and Ws around almost all day. Don booked his s.s.b. in with AH6GE, EA2JG/SQ, FM5CL, FO5FO, FR4FA/J, FS9TI, FV3ITU, FY0EK, K9AJ/KH5K for country No 316, HC2DZ, HP1FR, J88AB, KH6FKG, KH6IJ, KH6/OE6BVG, N6DKP, N6ZV, NK4X/KP2, NL7KE, NL7MF, P43RR, PJ2/WB2LCH, PJ4CR, PS7KZ/AM, UZ0KWO, OH3/DK300, TY9SI, TY0LC, V47NXX, VI88NSW, VI88SA, VE6BI, VE7KY, VKs, VP2MT, WORLX/KH5, ZF2ME/ZF8, ZK1XV, ZL5BKM (Antarctica), 4K0DR at the North Pole, 9M2CW and 9V1TJ.

Phil Boorman (Sittingbourne) found 28MHz yo-yoing between the very good days and the dead ones. He managed s.s.b. with PY1, PY3, PY7, LU4ACJ,

Practical Wireless, August 1988

LU1HCO, VP8BLD (Mount Pleasant), 4X4s, then EDX by way of OH1, OH3, OH7, SM4JWI, HA5JI, OE6SRG, LZ1KKR, then UL7, ZC4EE and Y110BGD. For the c.w. there was LU7JI, using 30 watts to a home-brew beam. On the gotaway front this band showed Z21GU, VK3AKK, JA5BSQ, all around 0830. SORASD was missed for the third time! KH6FOD was noted at around 0800Z for almost an hour, with some of the more powerful G stations working him. Others included other VKs and EP2HZ. A first QSO on 10MHz yielded c.w. with OH7OI, using a 1/2 G5RV, ten watts and an a.t.u. As for 7MHz, there were just the usual crop of Europeans and nothing Phil would classify as real DX.

GM0FUW put up a 14MHz dipole to replace his 18m of wire along the bargeboards of the house. It produced a welcome improvement in performance and the QRP raised Y23RJ, HB9LU/P, F2XP, I2XIQ and UA1WT, while the gotaways included VE1AZF, VK2CLV and 9Y4GR. Alas, at the end of April the winds fetched down the dipole, so Steve reverted to the wire. On 3.5MHz this gave G2OU, G5JL and G3BPE and on 21MHz YU2CDH and EA7DRK. Finally a little blast on the end fed wire on 14MHz yielded W3IIF, who had one kilowatt to a beam—a bit of a difference to Steve's indifferent antennas and HW8!

Now we come to **G2HKU** (Sheppey): Ted says conditions have been better and a bit more time has been available. He sent in the longest list I have seen. On top Band, ON7BW was worked on s.s.b., plus ON4CW on c.w. For the rest, c.w. all the way: 7MHz gave K7CW, while on 10MHz W4QEJ and SX1RAAG were booked in.

The main area of activity was 14MHz, with VK3DEG, W6DU, K2OZ, LU6ELJ, YN3EO, W1CW, G4BUE/W4, K9QVB, K5MM, ZL3GQ, WA7OET, N2UU, W2FC, VK5SW, AX3DP, AX3XB, AX3KS, VK3MJ, VK1CC, W0TOY, AX4ZA, W6VD, VI88NSW, W6VX, NL7GP, W6OV, HC2DZ, W4BAA (Captiva Is.), W1HZ, AX3ITU, VK4VJ, VE2GTQ, K7GE/M/VE3, W5GEL, K5NA, 4X1FC (new call of Daniel 4X4OL), N4AR, W7SF, KR7G, BY1QH, W5ADZ, 8P6CF, LU4US, VK5TL, W2BA, PJ2AMN, VE6FT, W6VTK, WJ6U, CE2LZR, N6FSF and AI6V. As for 21MHz there were c.w. contacts to W4BAA, UAOL, UA9JH, UA9ODB and HK6ISX.

Ted says he was surprised to find the noise limiter on the KW Ten-Tec Paragon enabling him to copy c.w. right through the Woodpecker noise from Poltava. On the other hand it has also been of great interest, while using the Corsair, to use the Butternut HF6V with the bits for nine-band coverage and a G5RV, plus a couple of a.t.u.s to obtain comparative reports.

Contests

As always, this bit is in the main thanks to the regular input from W1WY and his Contest Calendar.

July 30–31 is down for the first FADCA Packet QSO Party, 0001Z Saturday to 2359Z Sunday. The object is to work Florida packet stations. No other mode may be used to solicit packet QSOs. Score one point per QSO on each band. Multiplier is the number of Florida counties worked. Logs by September 1 to FADCA, 812 Childers Loop, Brandon, FL 33511, USA.

Frequencies to be used: 3.615, 7.068, 10.145, 14.115, 21.115 and 28.115MHz, l.s.b. Include a summary sheet with the log, including name and address.

The AGCW-DL QRP CW Contest comes up over July 16–17, 1500Z to 1500Z. Five classes: A 3.5W or less, B 10W or less single-op; C ditto, but multi-op, D QRO stations, over 10 watts, who may ONLY work QRP stations; E s.w.l.s. Class C may operate the full 24 hours, others must take a 9 hour break in two segments. Exchange RST, QSO number and power input, add X if using crystal control (Example 599001/2X, 579001/QRO). Score one for station in own country, two for a station in own continent, three for a DX station in a different continent. Double points if crystal controlled. The multiplier is one for each DXCC country worked, and one for each DX station worked defined as a before. Call areas in JA, PY, VE, W, ZS count as countries. The total score for each band is QSO points times multiplier. Total over all score of totals so found on each band. Separate log sheet on each band, plus a summary sheet showing scoring, name and address and other essential information. Mail within six weeks of end of contest to Siegfried Hari, DK9FN, Spessartstrasse 80, D-6453 Seligenstadt, West Germany. Include one IRC for a copy of the results.

Final-Final

To make this piece "go" I need your reports, any h.f. band, any mode—c.w., s.s.b., f.m., SSTV, etc. Send your letters to me by the dates shown.

VHF Up

Reports to Norman Filch G3FPK
40 Eskdale Gardens, Purley, Surrey CR2 1EZ.

A good aurora at the beginning of May and the first 144MHz Sporadic-E openings towards the end of the month are the main news items this month, plus some reasonable tropospheric propagation.

Award News

Congratulations to **David Dibley G4RGK** from Marlow (BKS) who is the sixth member of the 430MHz QTH Squares Century Club. His certificate for exactly 100 squares confirmed was dated May 17.

Like many others striving for this goal, he found it very difficult to get many of the QSL cards. He points out that local squares, such as AI and BJ, remain unconfirmed in spite of his having contacted many stations in them.

Dave's station now comprises a Yaesu FT-101ZD transceiver driving a home-built transverter, the amplifier being a stripline design using two 3CX100A5 valves. The antenna array has been either four 20-ele home made Yagis or four modified 21-ele ones from the Tonna range. A two-stage pre-amp is mounted at the feedpoint.

22 countries are represented in his list which includes e.m.e. QSOs with KP4I (FK68) and K2UYH (FN20) "... made with an honest 100 watts to the antenna." One contact was via Ar with G2CIW, the rest by tropo. 33 QSOs were on c.w. and the others on s.s.b.

I see that five of the sixteen participants in the Squares table with over 100 confirmed on 430MHz are members of the QTHCC. I hope that some of the remaining eleven might have enough QSLs to qualify

for membership. If so, please write to the Poole address for a copy of the rules and the application form. An s.a.e. would be appreciated.

Beacon News

The UK Six Metre Group has sent details of two more beacons. The Gibraltar one, ZB2VHF is crystallised for 50.035MHz and gives 35W r.f. output. The p.a. is a modified CTE-767 CB amplifier which incorporates a low-pass filter.

A 5-ele Yagi antenna is available but consideration may be given to an omnidirectional array for worldwide use. The keyer is made on a p.c.b. to a G4FRE design and sends, "ZB2VHF Gibraltar IM76HE GGGGGG" before repeating the callsign.

The original p.a. and regulated power supply were supplied by Nevada Communications Ltd, thanks to G3SED. The units were designed, built and tested by Mike Walters G3JVL and funded by the UK Six Metre Group from its beacon fund.

The Iceland beacon TF3SIX is of similar design and crystallised for 50.0575MHz, its p.a. giving 50W output. The antenna, designed by G3JVL, is a five-eighths wavelength vertical. The locator is HP94CC.

A similar keyer to the ZB2 one is used and sends, "TF3SIX Iceland IIIIIII," followed by the callsign again. Frequency shift keying is used with the space 500Hz i.f. The TX was also made by G3JVL and funded by South Midlands Communications Ltd.

Richard Diamond G4CVI and Jonas Bjarnson TF3JB obtained the licence and

Station	Band (MHz)				Points
	50	70	144	430	
G4ZEC	—	—	356	—	356
G4OUT	—	—	176	—	176
GOHGA	—	—	173	—	173
GOHLT	9	—	117	—	126
G4WHZ	6	—	106	—	112
G4ARI	—	10	80	—	90
G4ZVS	—	—	80	—	80
G0DJA	11	—	55	—	66
G3FPK	—	—	62	—	62
G2DHV	10	23	22	—	55
G0GKN	—	—	52	—	52
G4VOZ	11	29	—	11	51
G4AGQ	—	11	30	2	43
G1SMD	8	—	13	—	21
GW4HBK	5	14	—	—	19
G1DOX	3	5	—	—	8
GU4HUY	—	—	3	—	3

Number of different stations worked since January 1.

the Hljodtaekni Radio Society donated the Yaesu p.s.u., the original p.a. unit again being supplied by Nevada Communications Ltd.

Both beacons have provisions for keying a second TX for another band.

A new beacon is now operational from the centre of Jersey Island using the temporary callsign GJ4HXJ. It is on 50.0655MHz and came on stream on May 9 at 1000UTC. It runs 10W to a halo antenna and eventually the call will change to GB3IOJ.

The f.s.k. message is "GJ4HXJ IN-89WE" and the beacon runs continuously. It was financed by KWK Amplifiers (GJ4ICD) and Phil Johnson GJ3RAX. Logic

design was by GJ3RAX and TX driver by G3JVL, the p.a. again donated by Nevada. BNOS Electronics donated the output filter and the antenna was built and supplied by GJ1TJP.

This beacon was widely received in several countries by various modes within the first week or two of operation. Reception reports of any unusual nature should be sent to Geoff Brown GJ4ICD, TV Shop, Belmont Road, St Helier, Jersey, Channel Islands. The telephone number is Jersey (0534) 77067.

DXpedition News

Clive O'Hennessey GW4VVX (GWT) has written to advise that he and Steve Jones GW6TGX will be active again from XS square between Aug 13 and 28. Look out for GB2XS and GB0LCS—the Lairg Crofters Show—the latter the weekend from the 19th.

The equipment will be as last year; two Kenwood TR-751E transceivers and two BNOS 200W amplifiers. A 13-ele Yagi at 9m a.g.l. from a site at Rosart, near Lairg, 150m a.s.l. should enable them to make long distance tropo QSOs.

A reminder of the Scilly Isles activity planned for Aug 4–14 by the Derbyshire Hills Contest Group on 70, 144 and 430MHz, see last month's VHF Up.

John McGowan EI2FN (Wicklow) has written to report that Seán Butler EI5CZB is planning to operate from a number of Irish counties in August. Those mentioned are Longford, Leitrim, Roscommon, Mayo and Sligo and he would like to know if any others are in demand.

Operating frequencies are 144.325MHz s.s.b. by EI5CZB/P and 144.075MHz c.w. by EI2FN/P during the afternoons and evenings. The equipment to be used comprises a Yaesu FT-480R, BNOS 180W amplifier, 12-ele "ZL" and 9-ele Tonna Yagis.

John and Seán hope this trip will enable certificate hunters to accumulate the 20 Irish counties needed for the "beautiful WEIC award which is sponsored by the IRTS." Seán's QTH for further details regarding dates, unspecified in John's letters, is 12 Lr. Kindlestown, Greystones, Co. Wicklow, Irish Republic.

Contests

First a reminder about the Worldwide VHF WPX Contest sponsored by *CQ Magazine* which lasts 48 hours from 0000UTC on July 17. A resumé of the event was published on page 44 in the June PW.

The 144MHz Low Power Contest is on July 30, 1500–2300UTC. Three sections, F for single-op. fixed stations, O for all others and L for the listeners. TX power output not to exceed 25W p.e.p.

On July 31, 0900–1500, there is the 432MHz Low Power Contest with the same categories. Power output from the TX not to exceed 10W. p.e.p. Both contests use the county/country multiplier scoring system so this will help those seeking out counties for the tables.

The next leg of the 10GHz Cumulatives is on Aug 7, 0900–2100UTC with the last session on Sept 11.

The 1.3 and 2.3GHz Trophy Contests are on Aug 14, 0900–1700UTC, both being two section events; F for single-op. fixed stations and O for all other. Scoring on 1.3GHz will be the usual radial ring system but one point per kilometre in the 2.3GHz affair. Entries for both events go to G4JLG at 40 Edge Fold Road, Worsley, Manchester M28 4QF.

Annual v.h.f./u.h.f. table January to December 1988

Station	50MHz		70MHz		144MHz		430MHz		1296MHz		Total Points
	Counties	Countries									
G1KDF	34	6	—	—	72	12	48	7	21	5	205
G1SWH	26	7	—	—	69	9	41	6	—	—	158
G6HKM	2	3	—	—	66	13	41	8	16	5	154
G4XEN	33	3	—	—	58	13	39	7	—	—	153
GM0EWX	53	7	—	—	49	10	—	—	—	—	119
G1MM	23	4	—	—	50	9	28	2	—	—	116
G1EFZ	—	—	18	2	67	23	—	—	—	—	110
G4DEZ	26	5	—	—	24	8	24	5	12	5	109
G8LHT	5	2	—	—	47	10	31	7	—	1	103
G0IMG	28	5	16	1	39	8	5	1	—	—	103
GW6VZW	27	4	—	—	58	11	—	—	—	—	100
GM0HBK	26	8	—	—	46	15	—	—	—	—	95
G6MGL	19	10	—	—	49	10	—	—	4	3	95
G4ARI	—	—	16	2	58	9	—	—	—	—	85
GW4FRX	—	—	—	—	60	25	—	—	—	—	85
G3FPK	—	—	—	—	67	17	—	—	—	—	84
G1DOX	16	2	19	2	22	5	5	2	2	1	76
G6MXL	14	3	8	2	31	4	9	2	—	—	73
G4VOZ	14	4	31	3	—	—	16	5	—	—	73
G8PYP	11	5	1	1	36	7	6	2	—	—	69
G2DHW	5	1	12	1	28	6	7	1	—	—	61
GW4HBK	20	7	31	3	—	—	—	—	—	—	61
ON1CDQ	—	—	—	—	46	15	—	—	—	—	61
ON1CAK	—	—	—	—	44	13	—	—	—	—	57
G8XTJ	—	—	—	—	46	7	—	—	—	—	53
G3EKP	12	3	16	4	7	4	5	1	—	—	52
G4AGQ	—	—	9	1	28	6	6	1	—	—	51
G4WHZ	3	2	—	—	31	12	—	—	—	—	48
G140WA	6	6	—	—	30	6	—	—	—	—	48
G1SMD	12	3	—	—	20	4	—	—	—	—	39
GM0JOL	—	—	—	—	30	9	—	—	—	—	39
G4ZVS	—	—	—	—	34	5	—	—	—	—	39
G0HGA	—	—	—	—	30	5	—	—	—	—	35
G0HDZ	—	—	—	—	30	5	—	—	—	—	35
G8PNN	—	—	20	3	—	—	—	—	—	—	23
GJ6TMM	1	1	—	—	13	7	—	—	—	—	22

Repeater News

The Kent Repeater Group's May Newsletter was much concerned with the Annual General Meeting and amendments to the Constitution. In the "Sits Vac" department I see a new Newsletter editor was desperately sought.

Elsewhere there are reports on the status of GB3KS and GB3KN on v.h.f. and GB3CK, GB3NK and GB3RE on u.h.f. Work on GB3CK following the storm damage of last October was carried out on April 16 in very wet weather and objective reports on any change in performance would be appreciated. G3TIS is the person to contact.

Meteor Shower Data

One of the longest and more reliable meteor showers of the year is the Perseids which lasts from July 20 to August 23 according to the British Meteor Society's Radiant Catalogue. As far as amateur radio is concerned, peak reflexions should be around Aug 12 and the shower is available all day.

The NE/SW path peaks around noon and the efficiency is over 50% from 0800–1800. The period 2200–0600 is the least useful. The E/W path is pretty consistent between 1000 and 0200 and least so around 0600.

The NW/SE path peaks nicely around midnight but is not so good between 0500 and 1400. The N/S path shows a couple of peaks around 0100 and 1100 with drop-outs at 0600 and 1800. All times are UTC (GMT).

**The next three
deadline dates are:
July 27, August 31
& September 21**

The VHF Convention

Those arriving at the RSGB's VHF Convention at the Sandown Park Racecourse on May 1 in time for the opening at 1030 had to queue for some 30 minutes in the rain. Once inside, the hall was packed and it required some pushing and shoving to get anywhere near some of the stands.

The usual traders were there selling everything from junk to posh transceivers. These events are ideal for home constructors since you can buy most of the bits and pieces for your pet project.

I had the pleasure of meeting many old friends and some newer ones who help support VHF Up. As usual, more people were missed than met.

The lectures were well attended but I only went to the excellent one given by Ray Flavell G3LTP on the ultimate possibilities of long distance tropo communication. One conclusion was that, given the right weather conditions, that elusive 144MHz contact between Europe and North America must be realised one day.

Ray put forward the suggestion that, just as white light when refracted through a glass prism is split into the familiar rainbow colours of varying wavelengths, so a similar thing happens to radio waves. The analogy is that the lower frequency, longer wavelength waves are refracted less, so travel further than the shorter ones. He suggested this explains why, taking due account of e.r.p. and path losses, 144MHz signals ultimately travel further than those at 430MHz.

Another conclusion is that the best period for long distance tropo propagation is the early autumn as far as Europe is concerned. The usual October lifts would seem to prove this idea.

The 50MHz Band

A propos the "Australia on 52MHz?" item in the June VHF Up, Dave Pape VK6ADP kindly sent me a large map of

Practical Wireless, August 1988



WOOD & DOUGLAS

VHF/UHF COMMUNICATIONS PRODUCTS

RF ENGINEERS/TECHNICIANS

WOOD & DOUGLAS are a Berkshire based, radio communication design and manufacturing company. Our product base accommodates broadcast industry, OEM supplies and security and surveillance customer requirements. There is also a small radio amateur retail turnover. As a consequence of further expansion we urgently need established radio engineers and technicians with HNC or degree qualifications and good bench experience. The work is rewarding, diverse and stimulating. The environment is happy, young and enthusiastic.

If you would like to be one of the twenty people that will take us towards two million pound turnover during the next financial year, call us now for an application form and further details. It will be a move you will not regret. Oh, and don't be afraid of the dreaded southern prices; if you're the right person we'll move heaven and earth to get you here.

Call WOOD & DOUGLAS on
07356 71444 and ask for Alan Wood NOW.

COMM RXS. Racial RA17 Rxs gen coverage 500Kc to 30 Megs in 30 bands as Var Selec. BFO, Tun Meter, RF tuning, high resolution film scale; crystal cal. etc for 240v supplied checked with leads & book. £188 also L model incorporates a number of circuit improvements. £230 **RF. & AF SIG GENS.** Marconi TF995/A2 high grade AM/FM unit 1.5 to 220Mc/s with int mod at 1 Kc. Carr/Mod meter, var O/P 1 Uv to 100 Mill/v supplied checked with accs & book. £115. **USM-44** 10/420Mc/s high grade narrow band AM sig gen int mod at 400/1Kc. Carr & Mod meters var o/p 50 ohm 0.1 Uv to 350 Mill/v for 230v tested with accs. £95 **AF Sig Gens** CT439 10c/s to 100Kc sine var O/P at 600 ohm small compact unit for mains or battery tested. £65 Advance CT433 15c to 50Kc sine O/PS var at 5 & 600 ohm tested. £38 Army Sig Gen No. 2 AM/FM 20 to 80 Megs var deviation & O/P to 100 Mill/v small compact unit for 12v DC or mains tested. £45 **RESISTORS** non inductive 150 ohm 40 watt ea 3 for £11.50 **BENCH P.U.** O/PS 250v DC at 250 Ma smoothed & 6.3v at 5 amps neat unit size 10x10x10" fused & SW tested. £26.50 **VARIACS** panel mt 2 amp 240 to 0 to 270 £18.50 also 4 amp 220 to 0 to 260 £26.50 same type 8 amp £35 **ARMY AE KITS** 30ft in 10x11" dia sections with all accs etc in carry bag new cond. £36 also 27ft telescopic type with accs etc in carry bag new cond. £36 also 27ft telescopic type with accs £43 **AERIAL SWT** type J for use with 1155/54 equip £16.50 **TAPE UNITS** Ferrograph 2 chan playback only units 3 speed twin transis amps low level O/P for 240v mains in metal carry case. £65 **SPEAKER UNIT** Army AFV type 5 1/2" dia 3" deep 3 ohm new. £8.50 **ARMY MONOC SIGHTS** size 5x27.5v var focus £9 **PYE RT ACCS.** Mains 12v p.u. with int spk for Westminster's with connec. £24.50 also 24v to 12v conv units for West rated 3 amps at 12v with connec & circ new £17.50 S/H £12.50 Battery packs Ni Cads 13.8v at 5 A/Hr 11 cells in metal case condition of cells not known. £11.50 or 2 for £16.50 **HAND GENS.** Army unit nom O/P 12/14v DC at 1 amp with electronic regulator £24.50 **RADIOSONDE UNITS.** later version of M.60 transis with crystal cont Tx on 27.95 as Temp. Press & RH sensors transmits info in form of morse code new cond reqs 3v DC. £16.50. **ROTARY INV.** I/P 18v DC O/P 230v AC 180 watts sine wave 50c/s new cond. £48 **POWER SIG GENS** for testing Army RF Power Amps freq 1.5 to 12 Megs O/P var up to 20 watts at 75 ohm metered for 240v new cond with cir. £75 **TUNING CAPS** panel mt type 6/56pf with 1/4" shaft 2 for £3.50 **AERIAL EQUIP.** Mannack whip with spring base 38" new £4.50 Pye UHF monopole for 440/480Megs with UR67 cable & plus ext soiled. £15 **BLOWER UNITS** 115v 60w Snail type single ended outlet 2x2 1/2" overhaul size 7x7x5" new cond. £16.50 **DIE CAST BOXES** good quality size 6x3x2" with int p.c.b. etc new cond. 2 for £4.50 4 for £8 **MAINS ISOL TRANS** 240/240v at 500 watts. cased. £17.50 **AERIAL UNIT** aircraft VHF 1/4 wave nom 125 Megs with insul base with coax fitting 29" long new cond. £8.50 **TRANS** 230v to 21v at 10 amps can be tapped by direct connec with sec to 16v £14.50 also sec 36v at 3 amps £11.50 and Auto 240/115 at 560 watts enclosed £14.50 **TIMER** Mech type panel mt 0 to 8 min with 1p/c contacts £8.50 **RADIO TUNER HEAD** Tunes 88/108 Megs with 10.7 megs IF out reqs 12v DC with connec new cond. £7.50 **PYE BANTAM UNITS** tuned for Air Band working (AM) with mike & Ae less crystal & batts. £38 **PHOTO FLASH CAPS** 215 Uf at 2.5Kv rapid discharge size 8x4x10" £17 **BELLS** 6" dia 2 1/2" deep red for 24v DC new. £7.50.

Above prices include carr/postage & VAT. Goods ex equipment unless stated new. SAE with enquiry or 2 x 18p stamps for List 42, open to callers 10.30 till 5pm, closed Mon/Thurs. phone if wishing to collect.

A.H. SUPPLIES

Unit 12, Bankside Works, Darnall Rd, Sheffield S9 5HA. Ph. 444278 (0742)

Books for radio amateurs

ELLIOTT ELECTRONICS THE 'HAM SHACK' for the Radio Enthusiast

JAYBEAM AMATEUR ANTENNAS APPOINTED DISTRIBUTOR

INSTANT HELP AVAILABLE

OSY OLD MAN TO

RIGS, ANTENNAS, SWR BRIDGES, POWER SUPPLIES, TEST GEAR, COMPONENTS, MORSE KEYS, COAXIAL CABLES, ROTATORS, MICS, PLUGS AND SOCKETS, SWITCHES

Call us on (0533) 553293
OR COME AND LOOK AROUND AT
26/28 Braunstone Gate, Leicester

TONNA F9FT THE VHF/UHF ANTENNA SPECIALIST

50MHz		435MHz	
20505 5 element	£41.69(a)	20909N 9 element	£28.62(a)
		20919N 19 element	£34.35(a)
144MHz		20438 19 element crossed	£39.66(a)
20804N 4 element	£27.60(a)	20921N 21 element 432MHz	£44.57(a)
20808N 4 element crossed	£34.96(a)	20922N 21 element ATV	£44.57(a)
20809N 9 element fixed	£30.87(a)		
20809N 9 element portable	£33.12(a)	1296MHz	
20818N 9 element crossed	£57.86(a)	20623 23 element	£30.36(b)
20813N 13 element portable	£46.00(a)	20696 4 x 23 element - power splitter - stacking frame	£160.00(a)
20817N 17 element	£61.54(a)	20655 55 element	£46.20(a)
		20666 4 x 55 element - power splitter - stacking frame	£230.00(a)
144/435MHz			
20899N 9 & 19 element Oscar	£57.86(a)		

All prices include VAT. Please add carriage (a) £5.00. (b) £2.20.
ACCESS or VISA cardholders telephone your order - immediate despatch.
Callers welcome but by telephone appointment only please.
SEND 50p FOR OUR CATALOGUE WHICH CONTAINS FULL SPECIFICATION OF ALL OUR ANTENNAS, POWER SPLITTERS, STACKING FRAMES, COAXIAL CABLES ETC.

SOLE UK DISTRIBUTOR 12 Conduit Road, Abingdon, Oxon. OX14 1DB.
RANDAM ELECTRONICS (P) Tel: (0235) 23080 (24 hours)

QUARTZ CRYSTALS **QuartzLab** MARKETING LTD

P.O. Box 19 Erith Kent DA8 1LH
Telephone: 01-318 4419
24 hr Ansafone:
Dartford (0322) 330830
Telex: 8813271 GECOMS-G
(Attention QUARTZSLAB)
An SAE with all enquiries please
PRICES NOW INCLUDE VAT

STOCK CRYSTALS

CRYSTALS FOR 2 METRES

HC25 £2.70 FOR ONE CRYSTAL £2.50 EACH FOR 2 OR MORE	
TX CRYSTALS	RX CRYSTALS
12MHz 30 & 40pf	44MHz Series Res
18MHz 25 & 20pf	14 15MHz 20 & 30pf
	Scanner Crystals
	S99 crystals £3.45

HC6 £2.80 FOR ONE CRYSTAL £2.60 EACH FOR 2 OR MORE

TX CRYSTALS	RX CRYSTALS
4MHz 30pf	44MHz Series res
	R0-R7, S11, S20-23

1x METRE CRYSTALS FOR 70.26 IN HC6/U AT £2.80 each
Tx 8.78250 Rx 29.7800
70CM CRYSTALS £6.50/pr or £3.25 each
For Pye PF1 PF2 & PF70 series Wood & Douglas and FDK MULTI U11
SU8 (433.2) SU20 R80 RB1 RB2 RB3 RB4 RB5 RB6 RB8 RB10 RB11 RB13 RB14 RB15

Also for MULTI U11 ONLY SU16 SU18
CONVERTER CRYSTALS IN HC18/U AT £3.30 each.
22.000, 38.666, 42.000, 96.000, 101.000, 101.500, 105.666, 116.000
FREQUENCY STANDARDS £3.20 each.

HC8 U 1000kHz 10.000MHz
HC18 U 1000kHz 7.000MHz 10.70MHz 48.00MHz 100.00MHz
TONEBURST, I.F. & MPU CRYSTALS IN HC18 £2.60 each.
7.168MHz (For 1750 Hz Tone), 10.245 (for 10.7 I.F.)
3.2768 4.000 5.0688 10.2400 14.3180 15.00000
YAESU CRYSTALS FOR FT101's F7901 & etc £4.60 each.
Many available ex stock (A list is available on request please send SAE.)

Full list available on request, please send SAE
PRICES NOW INCLUDE VAT

MADE TO ORDER CRYSTALS

FUNDAMENTALS	PRICE	FREQUENCY RANGE	OVERTONES	PRICE
1 TO 1.5MHz	£12.40	3rd OVT 21.00 TO 65.00MHz		£5.25
1.5 TO 2.0MHz	£5.90	5th OVT 60.00 TO 110.00MHz		£5.90
2.0 TO 6.0MHz	£5.50	5th OVT 110.00 TO 125.00MHz		£8.60
6 TO 21MHz	£5.25	7th OVT 125.00 TO 175.00MHz		£11.60
21 TO 25MHz	£7.50			

DELIVERY
2.0 to 175.0MHz 2 weeks approx. 1 TO 1.499MHz 3 to 4 weeks

Unless otherwise requested fundamentals will be supplied for 30 pl load capacitors and overtones for series resonator operation
HOLDERS - PLEASE SPECIFY WHEN ORDERING - else HC25/U supplied for XTLS above 3MHz

HC6/U & HC33/U 175MHz
HC18/U & HC25/U 2-175MHz
HC17 Add £0.50 HC45 Add £3.75

DISCOUNTS: Price on application for 10+ units to same frequency spec. or bulk purchases of mixed frequencies.
We supply FREE xtals for use in UK repeaters
COMMERCIAL CRYSTALS: available on fast delivery and at competitive prices
EMERGENCY SERVICE FOR XTALS 1 to 175MHz: Add the surcharge for each XTAL. Days refer to working days: 4 days + £12, 6 days + £7, 8 days + £5, 13 days + £3.
CRYSTAL SOCKETS HC25 £0.25 ea. HC6 £0.30 ea. MINIMUM ORDER CHARGE £1.50 unless ordered with crystals.
TERMS: Cash with order post inc. to UK & Ireland. Cheques & PO's to QSL LTD

PRICES NOW INCLUDE VAT

Western Australia on which Wickham, the location of the beacon VK6RTT, is marked. It is about 1250km north of Perth in locator OG89 on the northern coast of the territory. Its QRG is 52.320MHz.

Graham Rogers VK6RO, a very active v.h.f. man, wrote to say quite bluntly that, "LA6QBA did not hear VK6RTT on 52.300MHz. There is no beacon in Australia on 52.300". A lead story in the April *RadCom* News Bulletin stated the call was VK6RTV on 52.300MHz. VK6RO confirms there was a beacon with that call on that QRG but it has been QRT for four years.

Regretfully I conclude that this reception report cannot be substantiated since LA6QBA cannot have copied either the defunct VK6RTV or VK6RTT on 52.300MHz.

VK6RO says that the 50–54MHz band is only available to the VK6 and VK8 areas with all others restricted to 52–54MHz except outside television hours (1600–2200UTC). Graham uses 50.110MHz and monitors 28.885MHz for crossband working and liaison to the UK.

Thanks also to **George Hewlett (DVN)** who also sent information about the whereabouts of Wickham, complete with a sketch map.

Whatever the official situation is in France, many Fs have been worked on 50MHz direct and some German stations have been transmitting in the band, too. Perhaps by the time you read this the Finnish stations will have appeared legitimately on the band.

There was a good Aurora on May 6. **Martyn Jones G4TIF (WKS)** worked GM6VXB (ZR), GM0EWX (WR) and GM3WIL (XP). **Paul Thompson G6MEN (SPE)** using 25W to a dipole contacted LA3EQ (CT), Gms OEWX and 3WIL worked between 1515 and 1554. **Philip Ruder G6MGL (LDN)** worked GM4WJA (GRN) and G4UXH (CBA) in this event.

Calum Macpherson GM0EWX (HLD) made 69 QSOs in this Ar the majority in the period 1345–1715 and added quite a few new 1988 counties in the process, "... without once having to resort to c.w."

Geoff Brown GJ4ICD was tipped off about the event at 0845 but heard nothing in Jersey till 1515. From then until 1710 he worked around 40 stations in G, GI and GM.

Now to Sporadic-E. Openings were reported on May 4, 6, 7, 11, 15, 19, 21, 22, 23, 25, 26 and 27 in your letters. GJ4ICD submitted a very detailed account of Es propagation from 28MHz up enabling a picture of the way these events developed to be appreciated.

To summarise; 4/5 1350 9H; 6/5 1945 9H; 7/5 1209 F5GV in Cannes worked by G6MEN; 11/5 1228–1414 LA; 15/5 from 1425 for a couple of hours to 9H and CT; 19/5 1040–1310 GM and LA; 21/5 1800 CT; 22/5 0825 9H, 1330–1510 9H; 23/5 1750–1930 LA; 25/5 1405–1510 LA; 27/5 1320 LA, 1508 9H.

Most of all the above from Geoff's report which included a detailed account of the May 26 events. These started at 1700 with several LAs. GB3RMK beacon was copied at 2145 and GM0EWX and GM3JLJ (WIL) worked. At 2256 LAs were working CTs and CT1DTQ was S2 at 2310.

The following contributors caught various events as follows: **Tony Wayland G1HJW (ESX)** May 4, 6, 11 and 15; **Adrian Gee G1IMM (CBE)** May 15 and 22; **Bryn Llewellyn G4DEZ (ESX)** May 4 and 6; **Ken Osborne G4IGO (SOM)** May 6

and 15; **G4TIF** May 26 and 27; **Ela Martyr G6HKM (ESX)** May 23, 25 and 27; **G6MGL** May 15, 19, 23, 25 and 26; **Ian Harwood G8LHT (YSS)** May 23; **Steve Damon G8PYP (DOR)** May 11, 22 and 25; **Gerry Elliott G14OWA (LDR)** May 6.

From Scotland on May 7, GM0EWX worked FC1GTU (JNO5) at 1215, then F1GHV and F1GXY (JNO6) and F5GZ (JNO5) at 1413. Calum later telephoned to report CT and 9H worked in May.

Colin Robertson GM0HBK (HLD) worked southern Gs and GJs 4ICD and 6OZB on May 26, 2115–2125 and on the 27th, CT1WW (WB) at 1732. From Wales, **David Lewis GW4HBK (GWT)** worked cross-band to DL on May 6 and to DL, OZ and EA on the 15th. On the 25th he contacted LAs at 1546–1618.

Paul Baker GW6VZW (GWT) has concentrated on 50MHz working LAs on the 11th and 25th. He has heard 9H stations but has yet to make a QSO. G6MEN sent copies of the European locator map with the key Es paths marked on for the openings on May 6, 7, 27 and 28. These illustrate very clearly the numerous paths.

It seems obvious to me that in May, June and July, E-layer propagation at 50MHz is almost as frequent as the so-called "short skip" experienced on the h.f. bands. This is borne out by the cross-band reports from which it is clear that 50MHz signals from the UK are reaching all over Europe.

Now to pick out some more interesting items from your reports. **Gerry Schoof G1SWH (MCH)** lists a QSO on May 27 with SV2DH on Mount Athos, an experimental station of the University of Athens.

Hal Lund ZS6WB in his *VHF News* often mentions S22DH and I see he reports that SVOFE and SV1DO in Athens have recently received 50MHz permits valid for two years. SVOFE is WOYZS who was a very active DXer in the USA and who holds the first 70cm Worked All States certificate.

The Ascension Island beacon ZD8VHF (II22) on 50.0325MHz was copied on May 15 by GJ4ICD 1800–1805 S2; G4RSI 1745; G1HJW 1720 S3 QSB and G4IGO thinks he may have heard it at 1942 but is not sure.

Most of the aforementioned readers reported tropo contacts too as did **Dave Ackrill G0DJA (WMD)**, **John Acton G1DOX (AVN)**, **Bob Nixon G1KDF (LNH)** and **Ron Oakley G8GRT (CBE)**.

Ron Glynn G1UNH (WMD) writes that he has been QRV on the band since April 30. His station consists of a Yaesu FT-290R, Howes HC266 transverter and 3-ele Yagi at 5.2m a.g.l.

The 70MHz Band

At his new Bristol QTH, G1DOX has a dual band beam for this band and 50MHz which has helped him work 19 counties up to May 22.

John Jennings G4VOZ (LEC) reports the best activity for a year and is pleased to hear new B licensees on and using c.w. when reception is poor. The Ar on May 6 was good but faded out before most folk were home from work. He now uses a transverter by R.N. Electronics with the 144MHz module in his Yaesu FT-726R.

One of the new stations John worked was Ron Reynolds G6WEM (ESX) who prefers the band to 144MHz. He says it reminds him of top band—pleasant and relaxed. He uses a Howes 246 transverter, 10W output, driven by a Yaesu FT-290R, the antenna being a 4-ele Yagi from Jaybeam.

Ron Oakley G8GRT (CBE) took part in

all the Cumulatives working 40 different fixed stations and many portables in contests. He uses a Spectrum transverter and 17W to a loft dipole.

Gordon Emmerson G8PNN (NLD) has submitted an entry for the band this year and has worked down to Dorset and to a few interesting GM regions. GW4HBK reported on the May 6 Ar which brought him EI9FK at 1453 and again at 1535 for a ten minute chat on s.s.b. Others worked included G8VZT (SPE), GW4ALG (GWT), G4IJM (CVE) and the last QSO for Dave was G4VOZ at 1656.

The 144MHz Band

The Ar on May 6 was quite an event. GM0EXN called me at 0840 to say it had started in the north of Scotland but it was several hours before I heard anything. **Eddi Ramm DK3UZ (EN20c)** telephoned at 1117 to report it very strong in Germany. He listed 28 stations worked between 1111 and 1642 at QTEs 0° to 70°.

Countries worked included GM, OE, OK, PA, RB5, SM, SP, RA3, UA2 and UP2 in some really choice squares. I would select Eddi's best DX as UZ3DD (SQ64c), SP9KUR/7 (KK20c), SP9PRO/7 (LK11g) and RA3LE (QO21h).

G1SWH lists PE1MHB and FC1FLA for two 1988 new countries in the Ar. G4TIF worked GM8DFX (XS) for his 188th square on the band as did Ela G6HKM, making 22 QSOs. Her tally included seven Gms and assorted PA, ON, DL, OZ and EI stations.

G6MEN worked PA3DVG (CN) at 1647 but he wishes c.w. operators would listen above 144.150MHz for B licensees. The trouble is that few, if any, overseas c.w. users know about this curious UK situation requiring voice identification. G8PYP made a couple of QSOs including G0DKM only 87km distant.

GM0EWX worked 24 stations on s.s.b. in this event but did not list any specific stations. Mervyn Rodgers GM0GDL (CTR) "... managed to work an Aurora at last." He was QRV from 1530 to 1650, all stations being best at a QTE of 90° and all, except one, were in the southeast of England. The odd one out was GW4UWR (XL) for a new square. He heard PA and ON in this event.

Congratulations to **John Lincoln (HLD)** who is now GM0JOL (ex-GM8DFX). He points out he is in Sutherland and not Caithness, the latter appears on his address for convenience of the Post Office. He worked a few Gs in the Ar plus PE1MDD (DN) but it "switched off" at 1630.

Now the Sporadic-E reports and the first opening seems to have been on May 15 at 1312 when G4IGO worked YU4EDO and YT2GL (JF) in the space of two minutes. A YU4PM? was heard by Ken.

On May 25, **Mike Ray G4XBF (SRY)** heard YO3JW (NE) at 1413 for about one minute. The next and first major event was on May 27 from about 0845 when YU, YO, HG and LZ stations were worked for about 45 mins.

John Hunter G3IMV (BKS) worked YU1GT (KE) at 1912 and other YUs in JF and KE. **Haydn Barker G6XVV (YSS)** worked nine YUs in previously worked squares. G6MGL contacted YO2IS, YO2AVM and YU7RF.

There was an afternoon opening around 1615 when YO3RG and YO3JW (NE) were worked. The next Es event was on June 2 in the early evening to the Mediterranean. At 1812 I worked 9H1GB (HV) and

Practical Wireless, August 1988

Paul Pasquet G4RRA (SRY) worked EA7DZI (WW).

On June 4 at 1115, John Nelson GW4FRX (PWS) reported an incomplete contact with EA6FB (AY). Mark Turner G4PCS (BFD) worked EA5s in ZZ square.

Later that day a major opening occurred from about 1500 when hordes of strong stations were worked from many parts of the country. My closest contact was I4ERN (GE) at only 1246km which suggests very intense E-layer ionisation. Most all the stations I heard were Italians in GB, GD and HA squares typically, plus 9H5L/P (HV) and IT9JKY (GX).

As this event was well after our deadline, a full report will be given next month. Another event happened on June 5 from about 1300 when the star turn was ZB2IQ, the Gibraltar expeditionaries. Many southern Spanish stations were on but later the reflecting region moved north, too close for the more southerly stations but very favourable for the northern Gs and GMs.

On the tropo front Bob Nixon G1KDF operated from Ireland as EI3VVN/P from UO and VP squares as promised and initial reports suggest he did quite well. When in VP80c (Donegal) the weather sounded pretty unpleasant when I worked him at 1731 on June 1. He said he did not work much in the southeast from UO though, but G1SWH was lucky on May 28.

Another novelty was PA3BZL operating from a gas platform (BN57h) and worked by G1KDF, G6HKM, G6WEM and many others on May 14. On May 16, there was a tropo lift to Scandinavia, particularly for the east coast stations and LA8AK was worked in DS by John Fitzgerald G8XTJ (BKS) and G6HKM providing a new square for both.

Other readers reporting on the more usual tropo QSOs were G0DJA, Philip Everitt G1CRH (CBE), G1DOX, Ian Cornes G4OUT (SFD), G8PYP, G14OWA, GM0EWX and GM0JOL.

The 430MHz Band

G1DOX is using an indoor antenna at present with 5W but has worked into south Wales from Bristol. G1KDF was in the contest on May 7 but in 19 hours only worked 25 stations. On the 11th he added EI9Q (Waterford). G1SWH added seven more counties include EI3VVN/A in Kildare on May 28, which must be quite a rarity.

In the tropo lift on May 16, G3IMV added LA8AK and is now up to 121 squares worked. Howard Staddon G6STI (LDN) worked OZ6FH (ER), LA8AK and OZ1BUR (EQ) to bring his tally to 61.

Writing in mid-May, G4DEZ complained of heavy Syleidis QRM but did manage to work the usual ON, PA and a few DL stations. G6HKM operated in the contest to give some points to others on May 29 and found four new 1988 counties, CWD, CNL, LCN and PWS. LA8AK and OZ6FH were contacted on the 16th.

From the Isle of Skye, GM0HBK has a new FT-726R with the 430MHz module so hopes to get going soon using a 24-ele Parabeam antenna.

The Microwave Bands

G0DJA operated portable from Holme Moss in the April 17 leg of the 10GHz Cumulatives. Dave worked G3ZTR/P and G8AZA/P on Garrowby Hill near Scarborough at 90km, and G3FNQ/P 57km away on Ashes Beacon.

The following weekend he attended the *Practical Wireless, August 1988*

QTH Locator Squares Table

Station	Band (MHz)			
	1296	430	144	Total
G3IMV	37	121	405	563
G4KUX	—	107	365	472
G8GXP	45	151	331	527
G4DHF	—	—	307	307
G4SWX	—	—	293	293
I4YNO	—	—	270	270
G4RGK	38	107	262	407
GJ4ICD	59	119	253	431
G4XEN	—	106	252	358
G1EZF	32	93	249	374
G0DAZ	—	114	249	363
G4DEZ	44	36	246	326
G8XVJ	18	88	236	342
G3FPK	—	—	227	227
G3UVR	75	125	224	424
G4IG0	—	—	223	223
G4SFY	—	—	222	222
G4MEJ	—	—	213	213
G6XVV	25	64	211	300
G4SS0	—	81	207	288
G8LFB	—	—	204	204
G4TIF	—	107	188	295
G3COJ	44	103	186	333
G3XDY	81	137	185	403
G4MJC	—	33	184	217
GM4CXP	—	31	184	215
G6DER	76	110	183	369
G6HKM	29	101	180	310
G4XEK	—	—	178	178
G3JXN	87	133	175	395
G1EGC	—	80	173	253
GW4FRX	—	—	173	173
ON1CAK	—	—	172	172
G4DOL	—	—	172	172
G3NAQ	—	80	160	240
G1GEY	—	68	158	226
G1KDF	33	91	150	274
G6DZH	—	87	149	236
G1JUS	—	—	149	149
G8HHI	31	106	148	285

Station	Band (MHz)			
	1296	430	144	Total
G4MUT	28	90	145	263
G6MGL	59	89	141	289
HB9AOF	55	80	141	276
G8ATK	42	89	138	269
G8MKD	—	49	137	186
EI5FK	—	35	137	172
GJ6TMM	—	38	133	171
GM0BPY	—	57	129	186
G8ZDS	—	43	129	172
G8PNN	62	97	128	287
G1LSB	—	126	125	251
G6STI	21	61	124	206
G4TKG	—	—	118	118
G8XTJ	—	—	108	108
GW6VZW	—	6	106	112
G8LHT	3	63	103	169
G4AGQ	1	41	103	145
G4NBS	59	103	102	264
GW8VHI	—	48	102	150
G4CQM	—	52	100	152
G6AJE	5	57	95	157
G1IMM	—	13	94	107
G4FRE	63	136	84	283
G14OWA	—	—	79	79
G1SMD	—	—	77	77
G4FVK	20	46	75	141
GM0HBK	—	—	75	75
G0FEH	—	18	70	88
G6MXL	10	36	66	112
G1CRH	—	—	62	62
G0HDZ	—	—	61	61
PA3EUS	—	18	57	75
GM0GDL	—	17	56	73
G8PYP	—	6	54	60
GU4HUY	—	—	54	54
G1NVB	—	—	49	49
G4ZTR	29	29	37	95
G1VTR	—	23	32	55
G2DHW	2	6	31	39
GM0JOL	—	—	27	27

Starting date 1 January 1975.

No satellite or repeater QSOs.

"Band of the month" 144MHz.

Microwave Round Table at Yorkshire Television's QTH in Leeds. Test gear available included a digital frequency counter to 24GHz, a spectrum analyser to 15GHz and a signal generator to 10GHz. Topics discussed included 24GHz, narrow-band modes on 10GHz and microwave beams. About 30 amateurs were present.

On May 7 Dave operated from Burrough-on-the-Hill on 10GHz and 24GHz in the IARU Contest. G6UED/P on Barr Beacon at 72km was the only station worked on 10GHz.

For the time being, so as not to frighten the neighbours, G1DOX has only put up a single 23-ele beam on 1.3GHz. Counties so far G6VKA (GLR) and G4JKN/P (DVN) on May 7. John is not yet QRV on 2.3GHz.

G1KDF was also on in the May 7 contest on 1.3GHz and Bob completed 22 QSOs. Best DX was PE0MAR while G4HWA/P (YSN) and ZO square was new all-time. In the lift on May 16, G3IMV worked SM6HYG (HS) and OZ1KLU (EQ) to make it 37 squares on 1.3GHz.

John Tye G4BYV (NOR) reports on the May 16 activity. PA0EZ (CM) worked LA6LCA (FT) on 10GHz narrow-band mode. That evening John worked SM6HYG on 2.3GHz and then tried 5.7GHz without success. SM6HYG is now QRV on 24GHz narrow-band. Carl has a good QTH and has worked G3LQR on 10GHz in the past.

John received RS59 reports from G6DER (ZN) and G8CHW (ZL) on his 3.4GHz signals. Talk-back to the latter was on 1.3GHz with a dish feed standing on a shelf in the shack! Anyone wanting first class coaxial cable for up to 2.3GHz is

advised to contact Brian Clowes GW4HBZ who can be reached on 074-571 2777 in the evenings. This is "Cellflex" cable made by RFS of Hanover, West Germany.

G4DEZ reports the 1.3GHz band is open regularly to PA and occasionally to DL but that more activity is needed.

G6HKM worked G1KDF on May 4 for LNH and the next day G8OPR (HPH) and ON4ABK (CL). In the contest on May 8, Ela winkled out another seven table counties with DOR and PWS being all-time new ones. On May 16, SM and OZ were heard briefly but faded before she could call.

On May 15, G6MEN operated portable from Moel Sych (YM) at NGR SJ 066318. Paul lists seven contacts on 10GHz F3E with G3UYM/P (IO82NN), G8AGN/P and G3PHO/P (IO93AD), G3ZME/P (IO82QL), G3NKL/P (IO83QW) at 127km and G3OXL/P and G4XDM/P (IO82XL). Paul used the GW1GHZ/P call of the Back Packers Microwave Group.

Gems of the Month

This contributed by GW4FRX and heard during a Megalift via Es to Italy. UK special event station, rather irately, "The Italian station. Will you please QSY. You are on the calling frequency." Response. "No! I have been here two hours. CQ Sporadic E..."

And from G3FPK in same event. S9-plus from at least a dozen stations on 144.300MHz on the proverbial piece of wet string. Then, "CQ DX... This station. Golf, the figure one ***... standing by for any DX call." What do these operators use for reception? A coherer perhaps!

After my wafflings about early morning DX last month I have continued to get very good results at around 0700UTC, with many VKs logged. It's also worth keeping an eye open for 28MHz activity as I've logged a couple of very good openings to South America this month. One interesting special event station copied was IQ5LDV on 14MHz RTTY, the special occasion being Leonardo Da Vinci's birthday! The 14MHz activity has been good with the following being an extract from my log: VK7AE (Australia), SU1ER (Egypt), TI2J (Costa Rica), 3A2EE (Monaco), 9H4B (Malta), 4N7S (Yugoslavia).

Mailboxes

The mailbox has become an accepted part of amateur life and is to be found on RTTY, AMTOR and Packet. I think it's about time I devoted some space to this interesting form of communication.

Despite the profusion of mailboxes, I'm sure there are many amateurs, especially newcomers, who steer clear because they don't realise what mailboxes can do for them.

First of all what is a mailbox? Most mailboxes consist of a computer with plenty of memory and a disk storage system. This computer is then connected to an amateur radio station running the appropriate mode, i.e. RTTY, AMTOR or Packet. In order to make the whole system work as a mailbox a special computer program is required and fortunately there are several programs available in the public domain. One of the benefits of using public domain, i.e. free, programs is that once you have learnt to use one mailbox you can easily find your way around most of them. Probably the best mode for standardisation is Packet, as some 29 of the present 40 UK v.h.f. mailboxes use the program by WA7MBL.

What can you use a mailbox for? The most obvious use of the mailbox is to leave messages for colleagues. Once the message has been stored, the mailbox will automatically let the recipient know that there is a message waiting next time he or she logs in to the mailbox. As well as being able to leave messages for colleagues, most mailboxes let you leave general messages for all to read. This type of message is particularly useful if you are looking for help with a problem or if you want to make a general announcement. In addition to these two basic message types there are usually a selection of files containing a range of useful information.

Where do you find mailboxes? Starting with Packet radio, they are to be found on 144.65MHz and can be accessed quite simply by "connecting" to the mailbox callsign. With the speed at which things change on the Packet scene the mailbox is the only practical way to keep up to date.

Your next question will be what's the callsign of my local mailbox? Well, here is the latest information that I have regarding UK v.h.f. Packet mailboxes. GOBSX (Plymouth), GODQW (Shrewsbury), GM0FRI (Oban), G1APC (Swindon), G1AWD (Reading), G1BYS (Bromley), G1DIL (Wolverhampton), G1KVD (Taunton), G1HZI (Hexham), G1NNB (Witham), G1SJU (East London), G1UWS (South London), GM1VBE (Glasgow), G3LDI (Norwich), G3OUF (Potters Bar), GM3SAN (Glasgow), G3VMR (Maidenhead), G3VOM (Manches-

ter), G3WGV (Wokingham), G14AHP (Belfast), GM4AUP (Airdrie), G4BE (Crewe), G4CLI (Wakefield), G4DGK (West Drayton), G4IDX (Ashford), G4JBX (Tamworth), G4KCM (Southampton), G4KLX (Wirksworth), G4LBJ (Liverpool), G4MTP (Daventry), G4PHL (Sheffield), G4SPV (Stevenage), G14WRI (Randalstown), GU4YMV (Guernsey), G4ZBA (Norwich), G8AND (Sutton Coldfield), G8EIA (Middlesbrough), G8IMB (Bristol), GM8SNE (Dalgety Bay) and G8UFQ (Grimsby).

All these stations have applied for licences. As and when these are granted the callsign prefix, in most cases, will change to GB7, i.e. G4KCM will be GB7KCM. One other change is that the suffix, -2 is currently being added to all mailbox callsigns to indicate the band being used.

If you want to find some h.f. Packet mailboxes the best place to start is 14.105MHz as this is the most popular frequency. Personally I'm not too impressed with h.f. Packet operation as there are too many stations trying to concentrate activity on one frequency. The resultant collisions slow the data to the point of being useless. When it comes to h.f. I think you've got a job to beat AMTOR, after all it's what the commercial stations use.

If you are interested in trying some AMTOR h.f. mailboxes, the following is a list of all the active mailboxes. The format used is: callsign, selcall and operating frequencies:

9M2CR. NMCR. 14.078MHz
DF2WY. DFWY. 3.5818MHz
DJ9JC. DJJC. 3.581, 7.038, 14.075, 21.081 & 28.075MHz
DJ4KW. DJKW. 3.586, 7.030 & 14.075MHz
DKOMAV. DMAV. 3.589MHz
DKOMTV. DKTV. 3.581, 7.038, 14.075, 21.081 & 28.075MHz
DK4PR. DKPR. 3.581, 7.038, 14.075, 21.115 & 28.075MHz
DL6FZ. DLFZ. 3.581, 7.030, 14.075, 21.075 & 28.075MHz
G3PLX. GPLX. 3.588, 7.030, 10.140, 14.075, 21.075 & 28.075MHz
HB9AK. HBAK. 3.581, 7.030, 10.146 & 14.075MHz
HB9BJJ. HBJJ. 7.032, 10.140 & 14.075MHz
LA9OK. LAOK. 3.588, 7.030, 10.146 & 14.075MHz
OH1BM. OHBM. 3.584, 7.030 & 14.075MHz
PAORYS. PRYS. 3.588, 7.030, 14.075, 21.075 & 28.075MHz
SK6SA. SKSA. 3.581 & 28.081MHz
SK7CS. SKCS. 3.582, 7.032 & 14.072MHz
ST2SA. STSA. 14.078MHz
VK2AGE. VAGE. 14.075MHz
W3GL. WWGL. 3.645, 7.035, 10.140, 14.078 & 21.075MHz

As you can see there are quite a few to choose from! I have only listed one frequency per station per band in order to save space, but many of the stations are capable of operating on several frequencies in each band.

Finally RTTY is not forgotten as there are some RTTY mailboxes on h.f. One that I have used recently is IK6GZM. This station can be found on 14.085MHz and is best located by tuning to this frequency and waiting for IK6GZM to send a beacon (this happens quite frequently). Once you have tuned in to the beacon the station can be called by sending:
RYRYRYRYRYRY
IK6GZM DE your call

Don't forget to use 45 baud 170Hz shift. Once you have made contact just follow the instructions. The only other RTTY mailbox I know of is ZS6CDY which operates on 14.093MHz. One very novel feature of RTTY mailboxes is that they usually allow you to change the baud rate, this can be very useful if you have a good link.

Most of the current mailboxes have reached a high level of sophistication and are able to automatically forward messages to users via other mailboxes. You can even send a message from a h.f. AMTOR mailbox to a user on a v.h.f. Packet mailbox, with the forwarding carried out automatically during quiet periods!

One of the golden rules when using a mailbox for the first time is to read the help file. This file is available on most boxes and provides a breakdown of all the commands and usually gives some examples. Another point is to always choose a quiet period if you are intending to download long files.

One final and important point concerning mailboxes is that the system operators (sysops) provide the service and commit hundreds of pounds worth of equipment entirely out of their own pocket. So please treat them with respect and the occasional thank you to the operator wouldn't go amiss.

If you've any news or comments on the use of mailboxes then please drop me a line. You can even send me a message via the G3PLX mailbox if you like!

BARTG Rally

The BARTG event is the number one rally for data mode enthusiasts and is not to be missed. This year the rally will be held on Sunday August 28 (Bank Holiday weekend) at Sandown Park Racecourse. The venue is located on the A307 Portsmouth Road near Esher and just South of Kingston-on-Thames. For those travelling from afar access is quite easy via the M25 and you will be pleased to hear that there is plenty of free parking.

In addition to the usual trade and club stands there will be a car boot sale so there should be plenty of "goodies" to be had! One point to remember is that a computer is only as good as the software it runs, so make certain there is suitable software available before buying!

With luck I should be at Sandown, but as our first baby is expected in early September I might be unavoidably detained!!

Equipment

Several interesting items this month starting with the TOR-1 from ICS Electron-

**The next three
deadline dates are:
July 27, August 31
& September 21**



The ICS TOR-1

ics. This new Teleprinter Over Radio (TOR) device has been designed primarily for the commercial market, but can also be used to run AMTOR. It operates ARQ, FEC and

SELFEC and is apparently very user friendly. To complete the installation the TOR-1 requires an ASCII terminal with an RS-232 interface and a suitable transceiver. The

price is £499.95 which is actually very reasonable for a commercial TOR system. The second item from ICS is a new low cost Packet radio TNC (Terminal Node Controller). Manufactured by AEA the PK-88 is one of the new breed of budget priced TNCs and sells at £109.95 inc. VAT. The PK-88 is developed from the PK-87 and features a v.h.f. modem, personal mailbox facility, 32K RAM and RS-232 or t.t.l. interface levels. The size has also been reduced to 35mm x 150mm x 190mm, it seems that each new development brings more features in a smaller space which must be good news.

Thanks to Siskin Electronics, I have managed to get my hands on a PAC-COMM TINY 2 Packet radio TNC. The TINY 2 is another of those miniature TNCs that have been selling like the proverbial hot cakes. I should hopefully be able to give you my impressions during the next few months.

Amateur Satellites

Phase III-c

The non-serialised inserted ARIANE-2 V-23 lift off carrying INTELSAT-5 was a total success, achieved at 2358UTC on May 17 from the French Guiana ELA-1 launch pad. Apart from the short delay imposed by a 15 minute hold up in the countdown to allow a threatening local thunderstorm to pass, it having been pre-detected by the newly installed ONERA radio interferometry system, all went according to plan with the launch resulting exactly one minute before the close of the window. INTELSAT-5 was first placed into an accurate 463km perigee highly elliptical transfer orbit, and then into the final precise geostationary orbit by its own F-13 apogee kick-motor. INTELSAT-5 F-13 is a 1.980kg telecommunications system operating in the "K" and "C" bands, and is a back up to one launched in December 1981, which is now rapidly running out of propellant to fuel the motor which maintains the GEOSAT on station.

At the time of writing this column on June 1, all is now ready for the launch of Phase III-c on the new ARIANE-IV V-22 mission. The vehicle has been moved on its mobile launch table from the ELA-2 vertical assembly building to the launch zone, and all is aboard. Since our last column, a small postponement took effect, initially putting the launch to June 8 around mid-day. Following this, a few minor problems were exhibited by the 1st stage turbo-pump of ARIANE-IV, and at first it was thought that a delay, of some nine days would be needed for a refit. Inspection showed that the problem was minor, taking only two days of delay, and the launch was then set for June 10 with windows from 1112 to 1203, and from 1325 to 1444UTC.

If, as confidentially expected at this time, the lift off took place at 1112 on June 10, the following Keplerian element set should give you the parameters of the intended orbit, with only a small adjustment of the decimal epoch day required to correct if the launch was delayed, or a few fine

tweaks to the figures when the precise values are known by actual NORAD/NASA measurement.

Epoch Year	88
Epoch Day	162.52220
Inclination	9.996
R.A.A.N.	238.50
Eccentricity	0.73099023
Arg. of Per.	178.155
Mean Anomaly	36.510014
Mean Motion	2.259879
Decay Rate	0.00
Orbit/Rev	0
S.M.A.	24528.91km

The satellite may still be in this initial parking orbit by the time you read this column, awaiting spin-up and the precise values required in order to ascertain the exact thrust angle and burn time(s) needed to nudge the spacecraft into the optimum position with the minimal kick-motor fuel consumption. On the other hand, it may well be in an intermediate orbit, which cannot at this time be exactly forecast. The planned and expected intermediate orbit is given by the following set of Keplerian elements, which are a synthetic set only, and should only be used until a precise set is given by measurements, and announced on and in the AMSAT media.

Epoch Year	88
Epoch Day	183.0
Inclination	57.0
R.A.A.N.	0
Eccentricity	0.685
Arg. of Per.	178.0
Mean Anomaly	0
Mean Motion	2.19351693
Decay Rate	6.0 ⁻⁸
Orbit/Rev	48

If these are put into your computer or calculator at this time, even if the satellite is still in a lower perigee orbit, it will give you an excellent idea of the appearance, duration, and DX capability of the close to nominal orbit and a good familiarity with its possibilities, which we have not experienced before. If you do not have a computer, then look at Figs. 1 to 8, print-outs from the SV1KC "sopp4" program for OSCAR-10 adapted for OSCAR-13 with the previous intermediate elements inserted, run from Saturday July 16 for 24 hours of tracking. At Friday midnight, by Fig. 1, the satellite is descending to perigee, as shown by the arrow in the column under M, and is at azimuth (AZ) 48 degrees, and

Reports to Pat Gowen G3IOR
17 Heath Crescent, Hellesdon, Norwich, Norfolk NR6 6XD.

TRACKING DATA		UTC	M	AZ	EL
PHASE 3E ON.		00:00	SA	16JUL88	
DX AT 00:00		00:00	E+	04:00	0000
> LONDON *		00:15	E+	03:00	0000
NEW YORK		03:45	E+	10:00	0000
S FRANCISCO		04:00	E+	10:00	0000
RIO		04:30	E+	10:00	10
CAPETOWN		04:45	E+	10:00	10
SINGAPORE *		05:00	E+	00:00	10
HONG KONG *		05:15	E+	00:00	10
TOKYO *		05:30	E+	00:00	10
DARWIN *		05:45	E+	00:00	10
PERTH *		06:00	E+	00:00	10
SYDNEY		06:15	E+	00:00	10
WELLINGTON		06:30	E+	00:00	10
HAWAII		06:45	E+	00:00	10
FAIRBANKS *		07:00	E+	00:00	10
PMS: 231		07:15	E+	00:00	10
RNG: 17811 Km		07:30	E+	00:00	10
		07:45	E+	00:00	10

Fig. 1

elevation 9 degrees. It is in mutual range of those cities marked by the asterisk, thus providing QSOs (if operational) with Europe, Asia, Australia and Alaska. Only 15 minutes later at 0015UTC, shown by Fig. 2, in comes San Francisco, W6, whilst we lose Perth in VK6, and then the satellite goes sub-horizon to the UK until it re-arises.

At 0345UTC, as shown by Fig. 3, we now have mutual visibility with Rio and Capetown, e.g. two new continents, South America and South Africa, and Antarctica too for good measure. This means within the last few minutes of the sinking the first few of the rising satellites we might have literally worked all continents.

At 0430 on Fig. 4 in comes New York, which we keep with Rio and Capetown until 0715, when, as shown by Fig. 5 we are joined by San Francisco. Finally, on Fig. 6, we lose the satellite soon after 1145, to have it return again before 2345UTC. Shown pictorially in Fig. 7, is the situation on a mercators map as seen at 0700UTC, with all the non-shaded areas in the footprint.

Remember that with the final orbit, with an inclination and apogee this high, we shall not only see the apogee over our hemisphere, but that occurring on the opposite side of the earth also, and thus have the satellite DX capability virtually world-wide (with the singular exception of the immediate antipodal area) on a daily basis.

It is expected that Mode "L" activity will be very high, as the ease of getting into the satellite with only a maximum of 10 watts to a 17dB gain antenna required for the 1269MHz uplink will bring this mode to many operators using modest equipment.

STOP PRESS!
OSCAR-13 was launched just 6 minutes late at 11 hours 19 minutes and 4.33 seconds UTC on Wednesday June 15—More next month!

TRACKING DATA	UTC	M	AZ	EL
PHASE 3B ON:	00	00	00	00
DX AT 00:15	00	00	00	00
LONDON	00	00	00	00
NEW YORK	00	00	00	00
S FRANCISCO	00	00	00	00
RIO	00	00	00	00
CAPE TOWN	00	00	00	00
SINGAPORE	00	00	00	00
HONG KONG	00	00	00	00
TOKYO	00	00	00	00
DARWIN	00	00	00	00
PERTH	00	00	00	00
SYDNEY	00	00	00	00
WELLINGTON	00	00	00	00
HAIRII	00	00	00	00
FAIRBANKS	00	00	00	00
PHS 236				
RNG: 14309 Km				

Fig. 2

TRACKING DATA	UTC	M	AZ	EL
PHASE 3B ON:	00	00	00	00
DX AT 03:45	00	00	00	00
LONDON	00	00	00	00
NEW YORK	00	00	00	00
S FRANCISCO	00	00	00	00
RIO	00	00	00	00
CAPE TOWN	00	00	00	00
SINGAPORE	00	00	00	00
HONG KONG	00	00	00	00
TOKYO	00	00	00	00
DARWIN	00	00	00	00
PERTH	00	00	00	00
SYDNEY	00	00	00	00
WELLINGTON	00	00	00	00
HAIRII	00	00	00	00
FAIRBANKS	00	00	00	00
PHS 62				
RNG: 33105 Km				

Fig. 3

TRACKING DATA	UTC	M	AZ	EL
PHASE 3B ON:	00	00	00	00
DX AT 04:30	00	00	00	00
LONDON	00	00	00	00
NEW YORK	00	00	00	00
S FRANCISCO	00	00	00	00
RIO	00	00	00	00
CAPE TOWN	00	00	00	00
SINGAPORE	00	00	00	00
HONG KONG	00	00	00	00
TOKYO	00	00	00	00
DARWIN	00	00	00	00
PERTH	00	00	00	00
SYDNEY	00	00	00	00
WELLINGTON	00	00	00	00
HAIRII	00	00	00	00
FAIRBANKS	00	00	00	00
PHS 80				
RNG: 36255 Km				

Fig. 4

TRACKING DATA	UTC	M	AZ	EL
PHASE 3B ON:	00	00	00	00
DX AT 07:15	00	00	00	00
LONDON	00	00	00	00
NEW YORK	00	00	00	00
S FRANCISCO	00	00	00	00
RIO	00	00	00	00
CAPE TOWN	00	00	00	00
SINGAPORE	00	00	00	00
HONG KONG	00	00	00	00
TOKYO	00	00	00	00
DARWIN	00	00	00	00
PERTH	00	00	00	00
SYDNEY	00	00	00	00
WELLINGTON	00	00	00	00
HAIRII	00	00	00	00
FAIRBANKS	00	00	00	00
PHS 144				
RNG: 36880 Km				

Fig. 5

TRACKING DATA	UTC	M	AZ	EL
PHASE 3B ON:	00	00	00	00
DX AT 11:45	00	00	00	00
LONDON	00	00	00	00
NEW YORK	00	00	00	00
S FRANCISCO	00	00	00	00
RIO	00	00	00	00
CAPE TOWN	00	00	00	00
SINGAPORE	00	00	00	00
HONG KONG	00	00	00	00
TOKYO	00	00	00	00
DARWIN	00	00	00	00
PERTH	00	00	00	00
SYDNEY	00	00	00	00
WELLINGTON	00	00	00	00
HAIRII	00	00	00	00
FAIRBANKS	00	00	00	00
PHS 250				
RNG: 4150 Km				

Fig. 6

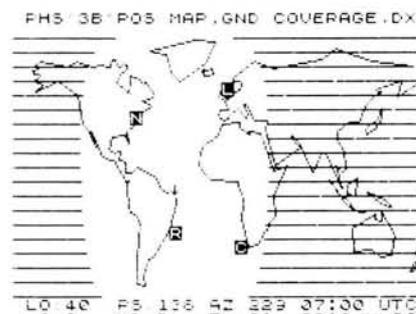


Fig. 7

However, as previously mentioned, we cannot expect immediate communications via the OSCAR-13 transponders, as it could take up to six weeks to finally position and test out the satellite systems. Other than unspecified test periods, the beacons only will be on until the new spacecraft is open for general amateur radio communications, which will be announced.

RS-1

Whilst this satellite has been heard once more by many over the past month, a (hopefully) unusual catastrophe has met the rocket which placed it and its accompanying companion RS-2 into space. The launch vehicle exploded violently as it was southbound near India just after 1200UTC on May 9. It scattered high velocity fragments over a rapidly enlarging area, of which at least 12 have been located and tracked by NASA so far. This is the first time that a rocket has exploded in this high orbit, although lower period satellite carriers have done so. It is also rather unusual for a rocket to explode on its own volition after so many years in space when all the fuel might be thought to be evaporated during the nine and a half years that this vehicle has been in orbit, leading to the theory that it might well have been hit by a high speed impact of a fragment from a previously exploded rocket. As there are some 7600 tracked objects now in earth orbit, and a lot more non-tracked, the "billiard ball" effect of this serial possibility is quite serious.

The computer simulation shown by Figs. 8 and 9 gives a visual portrayal of the orbiting objects around our near earth space, consisting of existing fragmented debris, third stages, fairings, nose cones, camera lens covers, jettisoned refuse from manned orbiters, etc., plus, of course, the satellites themselves, both decayed and operational. They average a velocity of some 28000+km per hour and many are relatively contra-rotating, giving a possible impact velocity of some 57000+km per hour, or 16km per second. Many of these objects have considerable mass to boot. The exponential effect of each impact potentially creates others, which in turn

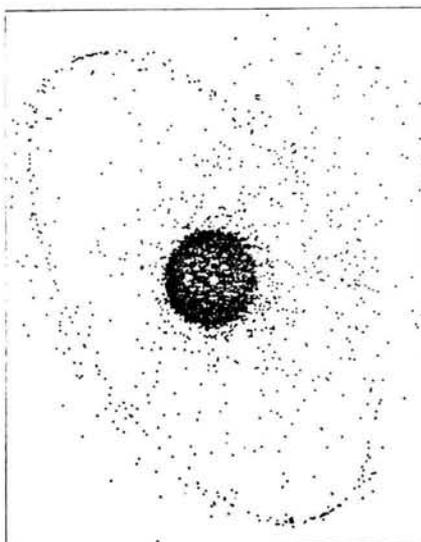


Fig. 8

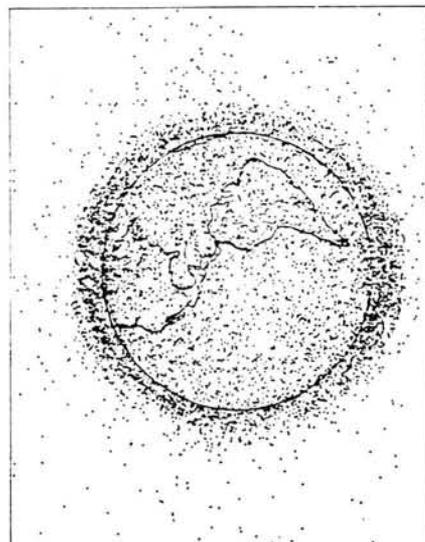


Fig. 9

create even more, until finally we all give up satellite communications in order to take up meteor scatter.

One of the basic causes of explosions in space is the corrosion of the tanks holding non-spent fuel. When the oxidiser (which promotes the corrosion) eventually meets the fuel, spontaneous ignition and detonation can result. (NB: This is NOT the big-bang theory!) When the long term effect began to look serious some five years ago, action was taken to expect all space nations to vent excess fuel from their vehicles so as to prevent the problem. It was the third stage of the ARIANE launcher, you may recall, which collided with OSCAR-10 when it was jettisoned off spare fuel for this very reason. Unfortunately, it would now appear that stages that went up long before the discovery and the resultant agreement can still pose a threat, and potentially jeopardise all satellites, manned missions, etc.

Satellite Round-up

RS-11 is still the transponder activated, with Mode "KA" (21MHz plus 145MHz to 29MHz) on during the week, and 145MHz

to 29MHz (Mode "K") on only at weekends. Mode "T" (21MHz to 29 plus 145MHz) will return if the associate COSMOS 150MHz transmitter is activated, as it blocks the 145MHz RX uplink receiver. Sub-horizon access, brought about by intense "E" layer ionisation and Sporadic E, has been much in evidence, with access possible often 12-14 minutes before AOS and after LOS.

A number of users have asked for the operating schedule for RS-10/11. At this time, a long range transponder employment is not given, but the expected restrictions on operating are only that low power (not greater than 10W e.i.r.p.) should be used on Mondays Moscow time, e.g. 2100 Sundays to 2100UTC Mondays, and that Wednesdays (2100 Tuesdays to 2100 Wednesdays) is for use only for special pre-co-ordinated scientific experiments, education, or other special purpose other than run-of-the-mill QSOs.

OSCAR-10 is in excellent working order, and shows every reason for continuing to perform well on the proviso that users keep to low power within the strict transponder use schedule. It was sad to listen to two loud stations operating through the

Practical Wireless, August 1988

Yaesu

FT767	HF Transceiver	1550.00	(-)
FEK767(2)	2m Module (767)	169.00	(3.00)
FEK767(10)	70cm Module (767)	215.00	(3.00)
SP767(16)	5m Module (767)	169.00	(3.00)
SP767	Speaker	69.95	(2.50)
FT290	Mini New Super 290	429.00	(-)
FT690	Mini New Super 290	399.00	(2.00)
MMB11	Mobile Bracket	SPECIAL PRICE	2.00
NC11C	Charger	10.50	(2.00)
CS11A	Carrying Case	6.50	(2.00)
YH415	2m Helical	7.50	(2.00)
YH444D	70cm 1/2wave	12.50	(2.00)
YM49	Speaker Mike	23.00	(2.00)
MMB15	Mobile Bracket	14.55	(2.00)
FT23R	2m Mini HH	223.50	(3.00)
FT73R	70cm Mini HH	233.50	(3.00)
FN89	Nicad Battery Pack (23/73)	27.60	(2.00)
FN810	Nicad Battery Pack (23/73)	32.60	(2.00)
FN811	Nicad Battery Pack (23/73)	50.60	(2.00)
NC.18C	Charger (23/73)	12.35	(2.00)
SMC28	Charger (23/73) 13A Plug	15.40	(2.00)
NC.28	Charger (23/73)	17.71	(2.00)
NC.29	Base Charger	57.50	(3.00)
PA6	Car Adap.Charger (23/73)	18.40	(2.00)
MH12A2B	Speaker Mic Miniature (23/73/27)	27.00	(2.00)
FT727R	2m/70cm HH	425.00	(3.00)
FN83	Spare Battery Pack	41.00	(2.00)
FN84	Spare Battery Pack	46.00	(2.00)
FN85	Empty Cell Case	10.00	(2.00)
FRG9600M	FRG9600 scanning RX	509.00	(-)
PA4C	Power Supply for 9600	21.00	(2.00)
MMB10	Mobile Bracket	10.00	(2.00)
NC9C	Charger	11.50	(2.00)
PA3	Car Adaptor/Charger	21.85	(2.00)
YM24A	Speaker Mike	21.05	(2.00)
FRG8800	HF Receiver	639.00	(-)
FRV8800	Converter 118-175 for above	100.00	(2.50)
FR17700	RX ATU	59.00	(2.50)
MH18B	Hand 800 8pin mic	21.00	(2.00)
MD18B	Desk 800 8pin mic	79.00	(2.00)
MF143B	Boom mobile mic	25.00	(2.00)
YH77	Lightweight phones	19.99	(2.00)
YH55	Padded phones	19.99	(2.00)
YH1	Lightweight Mobile Hset-Room mic	19.99	(2.00)
SB1	PTT Switch Box 290/790	22.00	(2.00)
SB2	PTT Switch Box 290/790	22.00	(2.00)
SB10	PTT Switch Box 270/2700	22.00	(2.00)
FT236 NEW	270cm 25W Base Stn	1450.00	(-)
FT747GX	160-10 All mode TX Gen. Cov.	659.00	(-)
FT2311R	23cm FM Transceiver	475.00	(-)
FT211R4	2m 45W FM Mobile	309.00	(-)
FT212RH	New 2m 45W FM Mobile	349.00	(-)

Dating Products

PC1	Gen. Cov. Con.	137.40	(2.50)
VLF	Very low frequency conv.	34.90	(2.50)
FL2	Multi-mode audio filter	89.70	(2.50)
FL3	Audio filter for receivers	129.00	(2.50)
ASP/B	r.f. speech clipper for Trio	82.80	(2.50)
ASP/A	r.f. speech clipper for Yaesu	82.80	(2.50)
ASP	As above with 8 pin conn	89.70	(2.50)
D75	Manual RF speech clipper	56.35	(2.50)
D70	Morse TUNE	56.35	(2.50)
RA	RF switched pre-amp	36.00	(2.50)
AD270 MPU	Active dipole with mains p.s.u	51.75	(2.50)
AD370 MPU	Active dipole with mains p.s.u	69.00	(2.50)
DC144-2H	2m converter	39.67	(2.50)
ANF	Automatic notch filter	67.95	(2.50)
SRB2	Auto Woodpecker blanker	86.25	(2.50)
RFA	RF switched pre-amp	36.00	(2.50)

Instant credit available
Mail/Telephone order by cheque or
credit card. Cheques cleared before
goods despatched. (E&OE)



OPEN TUES. SAT. 9.00-5.30
(CLOSED MONDAYS)

STOCK ITEMS USUALLY
DESPATCHED WITHIN 48 HRS.

DELIVERY/INSURANCE PRICES
IN BRACKETS

ICOM

IC761	New Super HF Transceiver	1465.00	(-)
IC751A	HF Transceiver	949.00	(-)
IC735	New HF Transceiver	949.00	(-)
AT100	100W ATU (75/1745)	365.00	(3.50)
AT150	75W ATU (735)	315.00	(3.50)
PS55	Ext PSU (725)	185.00	(3.00)
IC505	50MHz multi-mode portable	499.00	(-)
IC290D	2m 25W M/M Mode	542.00	(-)
IC296	75W FM	359.00	(3.00)
IC298	2m 45W FM	399.00	(3.00)
IC Micro	2m New Mini HH	239.00	(3.00)
IC25E	2m The Original HH	225.00	(3.00)
IC25E	New 2m 25W Base Stn	1039.00	(-)
IC4E	70cm HH	289.00	(3.00)
IC4E	70cm 25W FM Mobile	449.00	(3.00)
IC490	70cm 10W M/M Mode	617.00	(-)
IC3700	2m/70 Dual Band FM Mobile	556.00	(-)
IC12E	23cm HH	428.00	(3.00)
ICR71	Gen Cov RX	825.00	(-)
VHF/UHF Scanner		957.00	(-)
AH7000	25-1700MHz Discone	82.00	(3.00)
SP3	Ext. Speaker	61.00	(2.00)
CK70	DC Cable (R70/R71)	7.00	(2.00)
EX257	FM Board (R70/R71)	41.00	(2.00)
GCS	World Clock	43.00	(2.50)
BP2	Waterproof Bag all Icom HH	14.38	(2.00)
BC35	Desk Charger	70.15	(2.50)
BP4	Battery Pack 8.4V (2A/02/04E)	29.20	(2.00)
BPA	Battery Pack 8.4V (2A/02/04E)	9.20	(2.00)
BP5	Battery Pack 10.8V	60.95	(2.50)
BP7	Battery Pack 13.2V (02/04E only)	74.75	(2.50)
BP8	Battery Pack 8.4V	71.20	(2.50)
CP1	12V Charge Lead BP3/7/8	6.90	(2.00)
DC1	DC/DC converter operate from 12V	17.25	(2.00)
FA2	70cm Flexible 1/4 wave Antenna (BNC)	9.20	(2.00)
FA3	Speaker/Mic	3.20	(2.00)
HM9	Head set Boom Mic	21.85	(2.50)
HS10A	Vox Unit HS10 (02/04E only)	20.70	(2.00)
HS10SB	PTT SW Box HS10	20.70	(2.00)
LC1	Leatherette Case 2E/4E + BP5	6.90	(2.00)
LC3	Leatherette Case 2E/4E + BP3	6.90	(2.00)
LC11	Leatherette Case 02E/04E + BP3	9.20	(2.00)
LC14	Leatherette Case 02E/04E + BP5/7/8	73.54	(3.00)
SS1	Shoulder Strap	10.35	(2.00)
SM6	600ohm 8P Base Mic	46.00	(2.50)
SM8	1.3uA/600 8P Base Mic	15.00	(2.50)
SM10	Comp/Graphic Mic	116.00	(3.00)

CW Keys

VIBROPLEX	Iambic Standard	63.33	(3.00)
	Iambic Deluxe	99.99	(3.00)
	Vibrokeyer Standard	63.98	(3.00)
	Vibrokeyer Deluxe	78.09	(3.00)
	The Original Standard	73.54	(3.00)
	The Original Deluxe	82.74	(3.00)

BENCHER

BY1	Squeeze Key, Black base	67.42	(3.00)
BY2	Squeeze Key, Chrome base	76.97	(3.00)

STARMASTER

Kenpro	Electronic Key Unit (No Paddle)	54.70	(3.00)
Kenpro	Electronic Memory Key (No Paddle)	95.00	(3.00)

KENWOOD

TS940S	9 Band TX General Cov RX	1995.00	(-)
AT940	AutoATU	244.88	(3.00)
SP940	Ext. Speaker	87.55	(3.00)
TS930S	9 Band TX General Cov RX	1695.00	(-)
AT930	AutoATU	206.03	(3.00)
SP930	Ext. Speaker	173.78	(3.00)
TS440	9 Band TX General Cov RX	1138.81	(-)
AT440	AutoATU	144.82	(3.00)
PS40	2m 25W PSU	218.49	(3.00)
AT230	All Band ATU/Power Meter	208.67	(3.00)
SP230	External Speaker Unit	66.49	(3.00)
PS430	Matching Power Supply	40.81	(3.00)
SP430	Station Monitor	343.62	(3.50)
SM220	Band Scope Unit (830/940)	177.00	(-)
B5S	10/160 2KW Linear	1495.00	(7.00)
TH21	2M Mini HH	189.00	(3.00)
TH41	70cm Mini HH	46.54	(3.00)
TH205	2M HH	215.26	(3.00)
TH215	2M HH Keyboard	252.13	(3.00)
TR751	2M 25W M/M Mobile	599.00	(-)
TS711	2M 25W Base Stn (New Low Price)	898.00	(-)
TS811	70cm 25W Base Stn (New Low Price)	998.00	(-)
TS700	Gen Coverage HF/RX	167.21	(2.50)
VC10	118-174MHz Converter (R2000)	161.94	(2.50)
RS000	General Coverage HF/RX	875.00	(-)
R2000	118-174MHz Converter (RS000)	167.21	(2.50)
BT2	Empty Battery Case TH2141	11.86	(2.00)
DC21	DC Power Supply TH2141	25.00	(2.00)
VC20	Ext. Battery Case TH2141	99.00	(2.50)
HM1	Headset with Vox TH2141	32.91	(2.00)
PB21	Nicad Pack TH2141	24.36	(2.00)
TH2141	Desk Charger TH2141	46.08	(3.00)
SCB	Soft Case TH2141	11.86	(2.00)
SMC30	Speaker/Mic TH214/2600	28.31	(2.00)
MC50	4P Desk Mic	46.08	(3.00)
MC60A	8P Desk Mic	88.22	(3.00)
MC80	Electric Desk Mic	53.98	(3.00)
MC85	Desk Mic Audio Level Comp	99.00	(3.00)
MC43	8P Fist Mic	22.22	(2.00)
MC35	4P Fist Mic	21.72	(2.00)
MC55	Mobile Mic (6p, 8p)	52.67	(3.00)
LF30	HF Low Pass Filter	32.26	(2.50)
HS6	Lightweight H/Phones	24.36	(2.50)
HS5	Deluxe H/Phones	31.54	(2.50)
TS140	HF 9 Band Gen. Cov. TX/RX	862.00	(-)
TW100	270cm FM Dual band model SPECIAL	499.00	(5.00)
R21	500-950MHz AM/FM Scanner	465.00	(6.00)

SWR/PWR Meters

WELZ	1.8-200MHz PWR/SWR/PEP	99.95	(3.00)
SP420	140-525MHz PWR/SWR/PEP	59.95	(3.00)
SP425	140-525MHz PWR/SWR/PEP	119.95	(3.00)
SPB25	1.8-200-430-800-1240MHz	169.95	(3.00)

HANSEN

W2025	130-440 MHz 20/200W	52.75	(2.50)
FS5E	3.5-150MHz 20/200W	42.75	(2.50)

Miscellaneous

SMCS 2U	2 Way SO239 Switch	18.95	(2.50)
SMCS 2N	2 way n. Snts Switch	23.00	(2.50)
Kenpro KP21N	Way Switch w. Socket Deluxe	27.00	(2.50)
T30	30W Dummy Load	10.29	(2.50)
T100	100W Dummy Load	16.00	(3.00)
T200	200W Dummy Load	20.00	(3.00)
WAI	Wavemeter 120-450MHz	24.95	(2.00)
PK232	Packet/RTTY Terminal	269.95	(3.00)

S.E.M.

UNIT P, UNION MILLS, ISLE OF MAN
Telephone: (0624) 851277

S.E.M. ORM ELIMINATOR. Unique design gets rid of any local interference. Connect in your aerial lead and removes QRM before it gets to your receiver (you can transmit through it). Any sort of interference, it can be next to your rx (your computer) or several miles away, e.g. power lines. £69.50 ex stock. As the P.W. review says "Does it work? Yes it does."

S.E.M. TRANZMATCH MKIII. The only Aerial Matcher with UNBALANCED and TRUE BALANCED OUTPUTS. 1 kW 1.8-30 MHz, £120. Built-in EZITUNE (see below), £39.50. Built-in Dummy Load, £9.90. Ex stock.

EZITUNE. Allows you to TUNE UP on receive instead of transmit. FANTASTIC CONVENIENCE. Boxed unit, £45.00. P.C.B. and fitting instructions to fit in any ATU, £39.50.

FREQUENCY CONVERTERS. V.H.F. to H.F. gives you 118 to 146 MHz on your H.F. receiver, Tune Rx. 2-30MHz, £49.50 ex stock. H.F. to V.H.F. gives you 100 kHz to 60 MHz on your V.H.F. scanner, £49.50 ex stock. Plug in aerial lead of any receiver.

TWO-METRE TRANSMATCH. 1kW, will match anything, £32.00 ex stock.

DUMMY LOAD. 100 W. THROUGH/LOAD switch, £24.00 ex stock.

VERY WIDE BAND PRE-AMPLIFIERS. 3-500 MHz. Excellent performance. £32.00 or straight through when OFF, £37.00 ex stock.

R.F. NOISE BRIDGE. 1-170 MHz. Very useful for aerial work. £45.00 ex stock.

IAMBIC MORSE KEYS. 8-50 w.p.m. auto squeeze keyer. Ex stock. Ours is the easiest to use. £45.00. First class twin paddle key, £20.00 ex stock.

TWO-METRE LINEAR/PRE-AMP. Sentinel 40: 14x power gain, e.g. 3 W - 40 W (ideal FT290 and Handhelds), £85.00. Sentinel 60: 6x power, e.g. 10 W in, 60 W out, £95.00. Sentinel 100: 10 W in, 100 W out, £135.00. All ex stock.

H.F. ABSORPTION WAVEMETER. 1.5-30 MHz, £39.50 ex stock.

MULTIFILTER. The most versatile audio filter. BANDPASS Hi Pass, Lo Pass and two notches. Frequency and Bandwidth adjustable 2.5 kHz-20 Hz, £75.00 ex stock.

HIGH PASS FILTER/BRAID BREAKER. Cures T.V.I., £7.50 ex stock.

CO-AX SWITCH. Three-way + earth position. D.C.-150 MHz, 1kW, £25.00 ex stock.

12 MONTHS COMPLETE GUARANTEE INCLUDING TRANSISTORS

Prices include VAT and delivery. C.W.O. or phone your CREDITCARD NO. Ring or write for further data or catalogue. Orders or information requests can be put on our Ansaphone at cheap rate times. Remember we are as near as your 'phone or post box.

AERIAL TECHNIQUES

VIEW OUR COMPLETE RANGE OF PRODUCTS

Send for our 22 page illustrated catalogue, priced 75p.



INSIDE OUR CATALOGUE... Multi-standard Televisions Monitors, Aerial Rotators and many more items. Our extensive listings cover domestic, fringe and DXing installations within Bands 1

satellite for a week before use was permitted, but, despite the low battery and switching probability so caused, the transponder did not appear to be permanently further damaged.

FO-12 continues, when on, to function well. **Heinz Hildebrand DL1CF**, reports that on Mode "JD" he has now exchanged some 300 different files with many stations. "I estimate that there are some 50 to 60 different digital mode operators now on from Japan, and some 25 different stations in Europe", he states. "As for DX, I have had QSO's with stations in VK2, 3, 4, 6 and 8, and in ZL too." On Mode "JA", **Dave Rowan G4CUO**, reports that the use is still very low, with the upper half of the downlink passband often devoid of all signals.

OSCAR-9 and 11 continue to perform well, and the use of the DIGITALKER for the Polar Bridge communications of position worked well, with over 3000 schools around our earth taking part in the tracking. A few copy problems are evident now, as Sporadic-E often attenuates, Faraday rotates and almost extinguishes the downlink signal at times during daylight passes.

The USSR PHOBOS Martian moon explorer is due for launch between 7 and 12 July. At this time frequencies are unknown.

The next three deadline dates are: July 27, August 31 & September 21

The "BURAN" (UA for "Snowstorm") space shuttle, earlier thought to first orbit in May, seems now to be an unmanned flight due in July, placed in orbit by the massive ENERGIA re-useable launch vehicle from Baikonur.

Keplerian Elements

Again this month they have been furnished by **Birger Lindholm** of Dalsbruck, Finland, after his collating and checking. Birger points out that the Nodal Period and Increment given have been calculated as that of the Epoch Day stated. "METEOR 1-30 is back on 136.995MHz" he tells us "and COSMOS 1602 is active once again."

Satellite Name	OSCAR 9	OSCAR 10	OSCAR 11	F012	MIR	RS5	RS7	RS10/11
Bulletin No.	207	337	311	91	193	498	383	372
Internat Design	81-100B	83-058B	84-021B	86-61B	86-017A	81-120C	81-120E	87-054A
Object Number	12888	14129	14781	16909	16609	12999	13001	18129
Epoch Year	1988	1988	1988	1988	1988	1988	1988	1988
Epoch Day	130.24273983	115.94105397	122.10823373	104.26260007	130.80902547	129.30830428	121.29895428	129.99211414
Inclination	97.6186	27.3714	98.0570	50.0148	51.6199	82.9502	82.9531	82.9265
RAAN	162.0021	327.0087	186.0015	179.8548	264.5680	91.1267	86.4524	176.6970
Eccentricity	0.0003330	0.6026648	0.0012957	0.0011415	0.0021967	0.0009609	0.0023024	0.0013921
Arg of Perigee	134.6173	299.0558	170.9199	332.1841	309.1932	51.3929	354.9896	89.8437
Mean Anomaly	225.5441	13.8883	189.2231	27.8318	50.5357	308.7982	5.0932	269.8430
Mean Motion	15.32714689	2.05875480	14.62291026	12.44394839	15.75046158	12.05066609	12.08705652	13.71931792
Decay Rate	8.694e-05	7.8e-07	4.20e-06	-2.5e-7	4.3239e-04	1.2e-07	1.3e-07	1.2525e-03??
Orbit No.	36677	3660	22230	7587	12778	28111	28099	4397
Nodal Period	94.011321	699.2059	98.534368	115.653162	91.363946	119.551958	119.192254	105.023441
Long Inccrem	23.499932	175.3565	24.634266	29.239330	23.230111	30.014998	29.924990	26.381602
Beacon Frequency	21.002MHz	145.810MHz	145.826MHz	435.797MHz	143.625=voice	29.330MHz	29.340MHz	29.357MHz
	145.825MHz	145.987MHz	435.025MHz	435.913MHz	166.125=data	29.452MHz	29.501MHz	29.403MHz
	435.025MHz		2.4015GHz		(a.m.)			145.857MHz
	2.401GHz							145.903MHz
								29.407MHz
								29.453MHz
								145.907MHz
								145.953MHz
Ref EQX	14 May 1988	11 May 1988	14 May 1988	11 May 1988	12 May 1988	14 May 1988	13 May 1988	13 May 1988
Orbit No.	36750	3694	22419	7933	12813	28180	28253	4452
Time (HHMM.MM)	0012.19	1053.73	0058.81	0114.20	0042.59	0053.04	0106.07	0002.86
Long W	68.10	68.47	48.08	153.18	347.52	157.24	168.06	57.95

Satellite Name	NOAA9	NOAA10	METEOR 1-30	METEOR 2-14	METEOR 2-15	METEOR 2-16	METEOR 2-17	COSMOS 1602
Bulletin No.	257	142	532	233	165	104	31	875
Internat Design	84-123A	86-073A	80-051A	86-039A	87-001A	87-068A	88-005A	84-105A
Object Number	15427	16969	11848	16735	17290	18312	18820	15331
Epoch Year	1988	1988	1988	1988	1988	1988	1988	1988
Epoch Day	123.77948212	118.52149707	129.77613240	128.67569917	129.05430136	129.09388196	128.76577311	122.09212771
Inclination	99.0972	98.6805	97.7089	82.5398	82.4637	82.5572	82.5408	82.5414
RAAN	97.9177	150.0494	219.3314	208.7427	118.6987	180.4624	242.6660	358.1303
Eccentricity	0.0016382	0.0014489	0.0041716	0.0016284	0.0012730	0.0010790	0.0016502	0.0025133
Arg of Perigee	28.2866	19.8210	148.3947	70.6709	323.5521	250.8427	332.4239	348.5683
Mean Anomaly	331.9191	340.3528	211.9795	289.6215	36.4775	109.1572	27.6044	11.4952
Mean Motion	14.11581242	14.22566485	14.99224806	13.83781302	13.83588064	13.8345258	13.84023452	14.73834705
Decay Rate	1.4e-06	1.82e-06	3.39e-05	8.4e-07	5.5e-07	1.8e-07	6.3e-07	4.63e-06
Orbit No.	17454	8357	43102	9837	6759	3650	1360	19349
Nodal Period	102.069604	101.275710	96.109432	104.121266	104.135687	104.154086	104.103064	97.764134
Long Inccrem	25.515405	25.318935	24.027076	26.159055	26.163242	26.167125	26.154498	24.570448
Beacon Frequency	137.620=APT	137.500=APT	136.995	137.850MHz	137.850=APT	137.400=APT	137.300=APT	137.330=APT
	137.770=DSB	136.770=DSB						
Ref EQX	11 May 1988	11 May 1988	14 May 1988	11 May 1988				
Orbit No.	17570	8549	43181	9883	6800	3691	1405	19540
Time (HHMM.MM)	0002.50	0037.18	0110.22	0002.58	0027.75	0125.51	0027.35	0125.50
Long W	123.37	74.97	25.01	23.54	119.63	72.32	355.77	267.19

Propagation

Reports to Ron Ham
Faraday, Greyfriars, Storrington, West Sussex R20 4HE.

Last month I described the special antenna I built for solar observation and its installation. Although this site is over 30m away from my house, the advantages that it offered far outweighed my horror of lengthy feeder cables between the antenna and receiver.

The Receiver


Briefly, the receiver used in this radio telescope was a "spreadout" superheterodyne with an added means of recording the incoming signal on a paper

chart, Fig. 1. Basically, a superheterodyne receiver can be divided into 3 sections, 1: the r.f. amplifier, local oscillator and mixer, 2: the intermediate frequency amplifier and detector and 3: the audio output stage.

I installed section 1, a crystal controlled converter, in a waterproof container near the antenna, thus allowing for a short coaxial feeder at the observational frequency of 136MHz, Fig. 1. My first converter, inside container "B", was homebrewed using an r.f. stage to amplify the incoming signal at 136MHz, a crystal oscillator chain giving an output of 110MHz and

a mixer which produced an intermediate frequency of 26MHz (136 - 110 = 26MHz). This conversion enabled any solar noise, at 136MHz, to reach the rest of the receiver in the house via a coaxial cable at 26MHz. Some u.h.f. television antenna cable proved to be an ideal feeder because it offered very low loss at 26MHz and by laying it underground, "C", it was out of sight and the covering earth provided extra screening to reduce the possibility of unwanted signals appearing at 26MHz. For added protection, this cable was placed inside a hose-pipe and a twin plastics

- A. multi-element antenna
- B. converter and housing
- C. underground feed cables
- D. communications receiver
- E. d.c. amplifier
- F. pen recorder
- G. loudspeaker
- H. paper chart

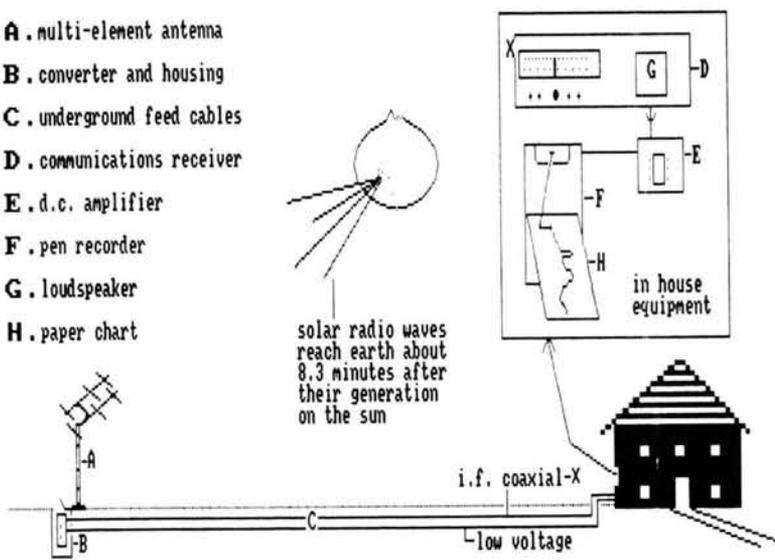

Solar Radio Telescope

Fig. 1

Fig. 2

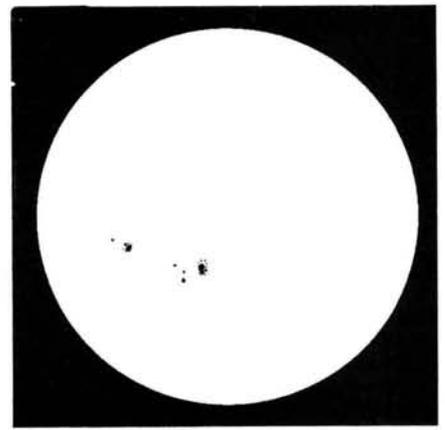


Fig. 3

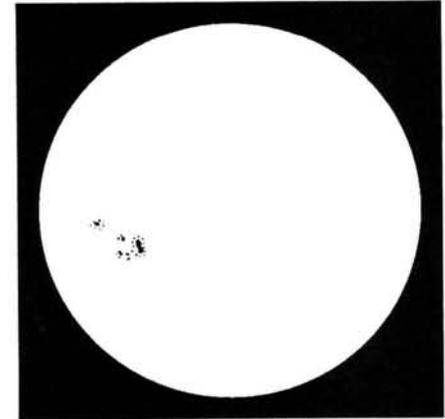


Fig. 4

Fig. 5 ▼

Beacon	26	27	28	29	30	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
AX2RSY																					X									
DF0AAB																X	X				X				X					
DF0THD												X																		
QK0TEN											X	X				X					X			X	X		X	X	X	
DL0IGI	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
EA2HR											X										X									
EA3JA												X																		
HG2BHA																X					X			X	X	X	X	X	X	X
IY4M									X	X	X					X	X				X	X	X	X	X	X	X	X	X	X
LA5TEN									X	X					X	X	X				X			X			X	X	X	X
LW1V6	X	X		X					X	X	X	X				X	X	X			X			X						
QH2TEN													X	X	X						X	X	X	X	X	X	X	X	X	X
PY2AM1	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
PY2G0B	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
VE2TEN												X																		
VK5WI																						X								
VK6RWA					X																									
VP8ADE	X	X					X	X	X	X						X	X				X									
ZD8HF	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
ZS1LA	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
ZS5VHF	X	X	X													X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
ZS6PV	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
ZZ1ANB	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
5B4CY	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

Fig. 6 ▼

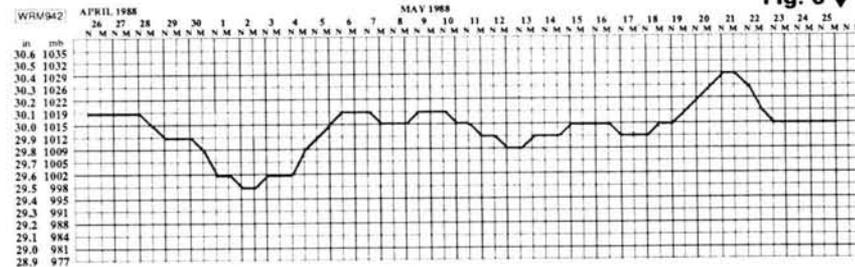


Fig. 7 ▼



between 136 and 137MHz (now converted to 26–27MHz on the dial of "D") to find a signal from an orbiting satellite.

The receiver first used in position "D" was an ex-military AR88. This was ideal because, apart from its good performance, it was fitted with a "diversity" terminal fed from its detector and a convenient place to connect the movement of a pen recorder, "F".

Although the energy at this point was insufficient to move the pen, the addition of a d.c. amplifier, using a 741 i.c., made this possible. There are many published circuits using a 741 operational amplifier to drive a meter movement, but some experimentation is required to get the right component values to make the pen move to full scale with a low input voltage. It was essential to fit a zero control to the 741 which can be adjusted in conjunction with

covered flex was laid alongside to carry the low-voltage d.c. required to power the converter.

By connecting this coaxial cable to the antenna socket of a communications receiver, sections 2 (the i.f. amplifier and detector) and 3 (the audio output) were complete in one internally powered box. If the communications receiver is now tuned

to the 26MHz signal carried by the i.f. cable and the receiver is switched to a.m. and its r.f. gain control is set reasonably low, any solar noise, at 136MHz, should be heard through the loudspeaker, "G", like a variable hissing, similar to, but distinct from the receiver's background noise.

This system can be tested by tuning

the receiver's r.f. gain control. Finally, I zeroed the pen and then increased the r.f. gain until the receiver's noise line was being drawn about 10mm in from the edge of the paper chart.

From the surplus market I purchased an Evershed & Vignoles recorder with a 1mA pen movement coil and a 240V chart motor which meant that observation times could be commanded by a time-switch. Gear wheels were obtained to give a chart speed of approximately 12mm per minute and I set the clock to switch on at 1130, as the sun entered the antenna's horizontal beamwidth, and off at 1430 when the sun was outside. These times are not too critical and must be adjusted to suit the location and antenna direction. Each daily observation produced about 2m of chart, which enabled increases of noise and/or individual bursts to be timed and clearly seen.

After many years, I replaced units "B" and "D" with a Microwave Modules converter and an FRG-7 communications receiver which also worked very well. Next month, I will show some of the observations from my archives, but now back to current reports.

Solar

Ron Livesey (Edinburgh) located 4 sunspots on April 2, 4, 13 and 14; 6 on the 9th and 7 on days 10 and 15. At his observatory in Bristol, Ted Waring counted 20 sunspots on May 4 and 6, 9 and 5 on days 10, 16 and 22 respectively. The rotation of the sun and the apparent movement of a large sunspot group on the disc can be seen in Figs. 2 and 3, drawn by Patrick Moore (Selsey) at 0840 on April 30 and 1040 on May 1.

Cmdr Henry Hatfield (Sevenoaks), located 16 filaments plus one group of 11 sunspots and another containing many small spots, with his spectrohelioscope at 1405 on April 20. During May he observed 1 double spot and 13 filaments on the 17th and multiple spot groups and 10, 16, 9 and 16 filaments respectively on days 5, 6, 22 and 28. In addition, Henry recorded large individual bursts of solar radio noise at 136MHz on April 29 and May 3 and 29.

"The solar flux for April fell from 127 solar flux units on the 1st to 114 s.f.u. on the 5th, then rose sharply to peak at 147 s.f.u. on the 16th and fell back to 100 s.f.u. on the 28th," wrote Neil Clarke GOCAS from Ferrybridge. Neil said that the monthly mean was 123 s.f.u., the highest so far this cycle and his computer print-out can be seen in Fig. 4.

Magnetic

"April was unsettled for the month with two periods of high activity," said Neil Clarke. He reports that the Ap index reached 103 on the 4th and 74 on the 22nd. "There were no quiet days (below 10) all month," added Neil.

The magnetometer used by Karl Lewis in Saltash was very unsettled on April 2, 5, 10 and 23 and indicating storm conditions on days 3, 4, 6, 22 and 23.

Aurora

"Todd Lohvinenko reported 'all sky overhead' at Winnipeg, Canada, on three occasions, April 5/6, 6/7 and 27/28," wrote Ron Livesey, the auroral co-ordinator for the British Astronomical Association. "Note that the severest magnetic storm effects were detected in America

and Todd's aurorae related the magnetic storm of the 6th and the build-up of activity on the 29th," said Ron. He also said that the NOAA Observatory, Boulder, Colorado, reported "severe storm" on April 6th and "storm" on the 22nd and 23rd. In addition, Ron received auroral sightings from observers in central Ireland described as "active storm" overnight on April 18/19, "glow" on 19/20, "active storm", "corona" and "glow" on 21/22 and "glow" on 22/23 and 23/24.

Around 1700 on May 6, Dave Coggins (Knutsford) received auroral reflected signals on the Band I television channels E2 (48.25MHz) and R1 (49.75MHz) and from the 50MHz beacons in Anglesey (GB3SIX-50.020MHz), Potters Bar (GB3NHQ-50.050MHz) and Inverness (GB3RMK-50.060MHz).

Sporadic-E

I counted up to 25 strong f.m. signals from eastern-European broadcast stations between 66 and 73MHz during the Sporadic-E openings on May 22, 23, 25, 26 and 27. As usual individual stations were exceptionally strong and, typical Sporadic-E, were frequently subject to deep fading. Hil Snaden G4YNV (Bristol) is interested in the apparent northward swing of signals at the end of a disturbance. I checked my archives and back in 1970, south-coast amateurs were among those responsible for installing a 2.5W beacon (TF3VHF on 70.275MHz) in Iceland. Many of us listened out for that tiny signal and then, late one June evening at the end of an extensive Sporadic-E, its signal suddenly appeared at 599, after a multitude of stations from the south-east had faded away.

The 28MHz Band

In Bransgore, John Levesley G0HJL heard several stations from the USSR on April 23, South America on the 20th, 24th and May 1, 7, 14 and the Middle East and South Africa on days 20 and 24 and 1, 7, 14 and 22. With Sporadic-E about John logged signals from Austria, Czechoslovakia, England, Hungary, "lots of Is", Spain, Sweden, USSR and Yugoslavia on May 22 and Sweden on the 23rd. He also worked into the USSR on April 23 and contacted the Tino Island Expedition-11W2/IP1 on May 22.

Hil Snaden logged c.w. signals from Argentina on April 25 and May 2, Brazil on the 30th, India, Indonesia, Turkey and Zaire on April 25, Saudi Arabia and Uruguay on the 26th, Jordan on May 11 and, on s.s.b., CQ6DTH, a special event station in Lisbon on May 6. "April 25 was quite a day, at one point VU2LO (India) and LU9CV (Argentina) were coming in simultaneously!," said Hil.

Propagation Beacons

My thanks are due to Chris van den Berg (The Hague), Dave Coggins, John

Coulter (Winchester), Henry Hatfield, Don Hodgkinson G0EZL, John Levesley, Greg Lovelock G3III (Shipston-on-Stour), Ted Owen (Maldon), Fred Pallant G3RNM (Storrington), Hil Snaden and Ted Waring, for their 28MHz logs which I have combined to produce the chart in Fig. 5. Dave Cogins also logged the PY2AMI beacon signals, almost daily at about S2, on 18.080MHz from 1900 to 2200 and between 1200 and 2100 on 24.900MHz. Don Hodgkinson first heard the new beacons EA2HB (28.247MHz) on May 6, HG2BHA (28.224MHz) on the 19th and ZD8HF (28.292MHz) from Ascension Is. on April 25. He also heard the Australian beacons AX2RSY and VK5WI on May 16.

Turning to v.h.f., Dave Coggins heard the 50MHz beacons GB3NHQ, RMK and SIX and the 144MHz beacons in Angus (GB3ANG-144.975MHz) and Wrotham (GB3VHF-144.925MHz) averaging between S1-3 on most days during the month prior to May 18. Dave uses a Yaesu FRV-7700 v.h.f. converter in front of his Icom R71 receiver and while the tropo was in progress, around 2100 on May 16, he was astounded to see the S-meter reading S9+10dB when tuned in the Wrotham beacon.

Tropospheric

The slightly rounded atmospheric pressure readings for this period, Fig. 6, were taken from the barograph at my home in Sussex. In Maldon, Ted Owen's barometer indicated peaks of 1025 (30.25in), 1027 (30.35in) and 1031mb (30.45in) on May 6, 20 and 21 respectively and lows of 1000mb (29.55in) on May 2 and 3.

934MHz

Terry Wyatt UK-845 (Walton-on-Thames) said that good conditions and DX were enjoyed on May 16 from 2000hrs into the night, when contacts were made with stations in Cambridgeshire, Derbyshire, Leicestershire, Norfolk and Warwickshire at distances between 140 and 190km. As a member of the Hampton Court DX Group, Terry also uses the callsign HC-62 and during the opening on the 16th, he heard UK-934MHz Club members from Ashby-de-la-Zouch (UK-1155), Martisfield (355 and 417), Newhall (549), Nuneaton (1259), Redditch (704) and Wisbech (394).

While on holiday in Deal, Les Jenkins GB-37 (Godalming) worked stations in Canvey Island (WD-432), Felixstowe (UK-717), Hadleigh (UK-968), Middlestoke (UK-1233), Sittingbourne (UK-938) and Southend (WW-01). Attached to his caravan in Deal, Les has a rotatable 10-element Yagi for 934MHz installed below his DXTV antennas, Fig. 7.

I had the pleasure of meeting Les and his wife at the Chalk Pits Museum (Amberley, Sussex) on May 30 when he told me how much he enjoyed operating on 934 during a lift and about his interest in computing, c.w. RTTY and scanning receivers.

From his home in Hampshire, John Levesley UK-627 made contacts of 161km with GY-186 in Guernsey on May 8 and 22 and JY-797/M in Jersey on the 22nd. John was in Guernsey himself on May 20 and worked RW-01 and O2/M on the mainland from the home of GY-186 and on the 21st, operating from St. Sampson (9m a.s.l.) and Fort George (100m a.s.l.), using 5W from a Delta 1 and collinear antenna he worked GB-3 in Dorset and MR-01 in Southampton.

Practical Wireless, August 1988

**The next three
deadline dates
are: July 27,
August 31 &
September 21**

There seems to have been a downturn in reception of long distant signals recently, with some ionospheric disturbances and severe fading problems. Clearly an improvement must be on the way as the sunspot count increases, but until then, we shall have to keep hoping for better conditions.

The changes to Moscow's schedules at the beginning of May resulted in an increase in broadcasting hours in the French, German and Arabic languages. The French Radio Moscow International service has brought together all the previously separate regional services and is on the air between 0400 and 0700, and from 1200 until 2200. German language programmes are heard 0430-0530, 0900-1000 and 1500-2030 whilst Arabic broadcasts for one hour at 0300 and between 1400 and 2030. Radio Moscow has announced a telephone number for listeners' comments and messages: Moscow 2336595. When this was tried, it rang, and rang, and rang . . .

Hungary may soon receive BBC External Service programmes in Hungarian and English via satellite for relay on cable systems in the country. At a recent Trade Fair in Budapest, there was tremendous interest in the BBC satellite reception demonstration, particularly as the Fair coincided with the political changes which occurred in Hungary then, with visitors crowding around to hear the news of events in their own country from London! It is reported that the authorities have no objection to relays being made available in this way.

In Hong Kong, the authorities are investigating the possibility of allocating a frequency to the BBC for twenty-four hour a day coverage with English and Chinese broadcasts from London. At present, BBC programmes are relayed on Radio Television Hong Kong (RTHK) Radio Three and Five during the evening, but a separate channel would benefit local and expatriate listeners.

A plan is being studied in London to change some of the output of BBC World Service. A *News Hour* programme will be established in the autumn which will be a rolling programme incorporating the regular newscasts, and analysis programmes such as *The World Today* and *Twenty-Four Hours*. *News Hour* will probably initially be broadcast twice daily. Also being studied is the possibility of a *World Service Two*, enabling news and current affairs to be carried on one Network, and features, drama, music and general programming on another. This would allow far more flexibility for general programmes, without the need to tailor programmes between newscasts. Full details will be carried in Broadcast Round-up as they become known.

If you have access to Sky Channel and a teletext decoder, you can now call up the external service schedules of Radio Netherlands and Radio Sweden, and this is to be followed shortly by extracts from *Sweden Calling DXers*, the station's weekly communications magazine. Page 496 currently carries Radio Sweden's schedule. Some other news for satellite users—Radio Moscow now delivers its programmes to North America daily at 0900 Eastern Standard Time (1300UTC) as well as 1900 EST (2300UTC) via the Satcom 1R Transponder 19, Channel 18-1.

Practical Wireless, August 1988

Europe

ORF Austria has English at 0030, 0430, 0730, 1130, 1305, 1630, 1730 and 2130, with programmes beamed to Europe 0400-2300 on 6.155MHz, 0700-1700 on 11.915MHz and 1700-2200 on 5.945MHz. The Austrian Shortwave Panorama is heard on Sundays 0100 and 0700, and Monday at 0400.

The BRT has changed a frequency for its 1000 broadcast in English to Africa, now broadcast on 21.810 and 17.595MHz. The European broadcast at 1730 remains on 1.512, 5.91 and 11.695MHz and the 2100 on 1.512, 5.91 and 9.925MHz.

Radio Sofia now uses 9.7 and 11.72MHz for English at 0630 and 17.825 and 15.31MHz for English at 1730.

Radio Denmark now uses 11.82MHz from 0900. The Voice of Greece is heard at 1500 on 15.63, 11.645 and 9.425MHz, with Thessaloniki at 1600 on 11.595, 9.935 and 9.425MHz.

The English language service from Radio Berlin International to Europe has a new schedule:

0500 on 5.965 and 6.115MHz
0745 on 6.115 (daily), 6.040, 7.185 and 9.73MHz (weekends only)
0945 on 6.115MHz
1100 on 6.115, 9.665 and 17.775MHz
1300 on 6.115MHz
1345 on 9.73MHz
1545 on 7.295MHz and 9.73MHz
1715 on 7.26, 7.295 and 9.73MHz
1945 on 6.115MHz
2145 on 5.965MHz

Programmes from the other side of Germany, on Deutschlandfunk, during the summer:

July 14. Alternative Holidays: find out about yak trekking or white water canoeing and other adventurous holidays in West Germany. Jazz in the Garden (also July 14) DLF visits Berlin as famous and less well known musicians perform in the garden of the National Gallery.

July 16 German Youth Hostel Movement: the first youth hostel, at Altena, is nearly 80 years old and has been visited by thousands of hostellers from all over the world.

July 21 Religion in West Germany: the continuing series, looking this time at the Jewish Community, Rosie Goldsmith reports. DLF programmes in English are heard at 1815 on 1.269MHz medium wave.

Iceland has moved in to the 13MHz band, with its 1220-1245 broadcast heard on 13.79MHz. Deutsche Welle's Sri Lankan relay at Trincomalee is to restart work during June, and at that time the relays via Radio Veritas Asia, which we have mentioned in this column, will cease.

Radio Norway International broadcasts to Europe:

0500 on 11.735MHz English on Monday
0600 on 9.59 and 15.165MHz
0700 on 9.59, 11.735 and 15.165MHz
1000 on 11.87 and 21.73MHz English on Sunday
1100 on 9.59MHz
1300 on 9.59MHz English on Sunday
1400 on 15.30MHz English on Sunday
1500 on 1.314MHz (Mon-Fri)
1600 on 15.18MHz English on Sunday
1700 on 9.655 and 15.22MHz English on Sunday
1800 on 9.655 and 15.22MHz

1900 on 9.59MHz English on Sunday
2000 on 9.59MHz English on Sunday
2100 on 15.265MHz

2200 on 15.18MHz English on Sunday
Programmes during the week are in Norwegian, with announcements in English.

Radio Bucharest from Romania broadcasts English during the afternoon and evening as:

1200 on 17.72MHz
1300 on 15.365, 15.27, 11.94 and 0.969MHz
1500 on 17.745, 17.72, 15.335, 15.25, 11.94 and 11.775MHz
1930 and 2100 on 11.94, 9.75, 9.69 and 7.145MHz

The station has announced a new address: PO Box 111, Bucharest.

The 1900 English transmission from REE Spain is now heard on 15.395, 11.79, 9.765 and 9.57MHz. REE will have a new relay station in Costa Rica which will start testing in 1990 and commence full operations in 1992. The s.s.b. transmissions from Sweden which were due to come to an end this summer have been granted a reprieve, and will continue until the year end, at least.

Reception of Radio Moscow's Great Britain and Ireland service continues to be poor at 1900. Frequencies used are 15.475, 11.95, 11.85, 9.775, 9.63, 7.37, 7.33 and 1.143MHz medium wave. R Moscow World Service continues to use several 13MHz channels during the day, including 13.650, 13.68 and 13.71MHz which tend to offer good reception on the whole.

Africa

Radio Africa from Equatorial Guinea has been heard between 1700 and 2200 on 9.555MHz. Radio RSA is using 4.99MHz, replacing 5.98MHz between 1900 and 2000, in parallel with 9.61 and 7.27MHz. Reception is marred in the UK by co-channel interference on this new low frequency.

Middle East

Iraq in English is heard at 0000 on 11.81 and 11.775 and at 2000 on 15.23 and 9.77MHz. Israel has moved from 15.095 for its domestic and external services as this channel is now occupied by Syria (in parallel with 12.085MHz). English broadcasts from Jerusalem are:

0400-0415 on 13.725, 12.077, 11.655, 11.605, 9.435 and 9.010MHz
1000-1030 on 21.675, 21.66, 17.685, 17.63, 17.575, 15.65, 15.64, 11.585 and 11.7MHz
1700-1715 on 13.75, 11.655 and 11.585MHz
1900-1930 on 17.685, 15.585, 15.485, 13.725, 13.625, 11.70, 11.605 and 9.010MHz

2130-2200 on 15.64, 15.592, 13.725, 13.625, 12.08 and 11.605MHz
2300-2330 on 12.077, 11.605 and 9.435MHz (and at 0000 and 0100)
Network B relays:
0300-0515 on 13.75, 11.585 and 9.385MHz
0515-1300 on 17.59 and 17.555MHz
0515-2000 on 15.615MHz
1100-1530 on 11.585MHz
1730-2215 on 13.75, 11.655 and 11.585MHz
2000-2215 on 9.385MHz

Turkey surprised band watchers at the start of May by going way out of band for programmes to Europe—14.88MHz was introduced running in parallel with 15.16 and 11.96MHz through the day from 0355 until around 1600. One wonders just how many average shortwave listeners are able to receive this channel on sets which don't have continuous coverage, as even one such as the recent Sony ICF-7600DA does not have this frequency in its coverage!

Asia and the Pacific

Afghanistan has been heard on new frequencies:

English at 0900 on 17.655 and 15.255MHz

English at 1900 on 11.755 and 9.665MHz
Kabul's First programme is on the air on 4.74, 4.450 and 3.965MHz until 1930.

If you have to get up in the early hours of the morning, start your day with Radio Australia. Some of the 15MHz frequencies come in well at around 0400—try 15.395,

15.32, 15.24 and 15.16MHz. The 31 metre band frequency of 9.655 was performing very poorly at the beginning of June during the morning (0700 onwards), although 7.205MHz worked well during the early evening.

Bangladesh has English at 1230 on 15.25 and 17.87MHz, with the 0800 Voice of Islam on the same channels. The Soviet Union's relay of Laos in French at 1100 is now on 15.24 and 11.96MHz.

New Zealand was heard during May with good reception on 12.045MHz around 0700. This frequency operates with 15.15MHz between 0345 and 0730.

Radio Pyongyang in North Korea has an English language schedule:

0000 on 15.16 and 15.115MHz

0400 on 15.18, 15.16 and 15.115MHz

0600 on 15.18, 15.16, 13.65 and 9.53MHz

0800 on 15.18, 15.16, 11.83 and 9.53MHz

1100 on 11.735, 9.60 and 6.576MHz

1300 on 11.735, 9.60, 9.555, 9.345 and 9.325MHz

1500 on 11.74 and 9.325MHz (also at 1700)

2000 on 9.345 and 6.576MHz

2300 on 13.65 and 11.735MHz

KBS Seoul has English at 1450 on new 9.515MHz, with Russian starting at 1500 in parallel with 7.275 and 9.87MHz.

The Americas

Surinam's International Service was off the air for some time during May, but returned at the end of the month using 17.875MHz at 1700 for its multi-lingual transmission.

Some gaps to complete the WCSN schedule in last month's column:

0200-0400 on 9.85MHz

1200-1400 on 5.98MHz

1400-1600 on 13.76MHz

1600-1800 on 21.64MHz

2000-2200 on 15.39MHz

KYOI can be heard at around 0700 on 17.78MHz with relays of WCSN programming.

**REVISED SERVICE!
LOWER PRICES!**

Practical Wireless



0202 678558



PCB SERVICE

Printed circuit boards for *Practical Wireless* constructional projects are available from the PW PCB SERVICE. The boards are made in 1.5mm glass-fibre, and are fully drilled and tinned. All prices include postage, packing and VAT for UK orders. Please add £2.00 per order for despatch to overseas addresses.

Orders and remittances should be sent to: **PW Publishing Limited, FREEPOST, Enefco House, The Quay, Poole, Dorset BH15 1PP**, marking your envelope **PCB SERVICE**. Cheques should be crossed and made payable to PW Publishing Ltd.

When ordering, please state the Article Title and Issue Date as well as the Board Number. Please print your name and address clearly in block letters, and do not send any other correspondence with your order. You may telephone your order using Access or Visa. A telephone answering machine will accept your order outside office hours.

Please allow 28 days for delivery. Always check the latest issue of PW for the current details of price and availability. Please enquire for p.c.b.s not listed here.

Board Number	Title of Article	Issue Dated	Price (£)
WR068	AF Speech Processor	Jan 80	5.20
WR095	Transceiver Power Supply	Sep 80	3.85
WR126	"Exe" 10GHz Transceiver	Aug 81	7.70
WR144	Iambic Keyer	Mar 82	6.50
WR143	ATV Converter	Apr 82	7.10
WR156	Repeater Time-out Alarm	Nov 82	5.20
WR160	LMS Regenerative Receiver	Feb 83	5.20
WR167	RTTY Terminal Unit for ZX81	June 83	7.80
WR165	"Severn" (VFO)	June 83	5.20
WR166	"Severn" (Receiver/Audio)	Jun 83	6.50
WR168	"Severn" (Ch. over/Sidetone)	Jul 83	6.50
WR169	"Severn" (Transmitter)	Jul 83	6.50
WR165 etc set	"Severn"	—	14.90
WR161	"Marchwood"	Jul 83	2.40
WR179	Transceiver VOX Unit	Mar 84	6.50
WR183	Top-band DF Receiver	Apr 84	6.50
WR184	Simple Top-band Receiver	Jun 84	6.50
WR185	Auto-notch Filter	Jun 84	6.50
WR187	Morse Sending Trainer	Jul 84	4.50
WR190	Mod FRG-7 (Switching)	Oct 84	4.50
WR189/192 pr	Bug Key with 528-bit memory	Oct 84	8.50
WR194	Mod FRG-7 (FM/squelch)	Nov 84	4.50
WR195	Stable Toneburst	Nov 84	2.60
WR196	"Teme" (Transmitter)	Nov 84	3.70
WAD246	"Dart" Follow-up	Dec 84	4.00
WA001	"Teme" (VFO/Doubler)	Dec 84	2.80
WA002	"Teme" (Receiver)	Jan 85	4.30
WAD280**	Triambic Keyer	Feb 85	7.10
WAD249	Mod FRG-7 (BFO)	Feb 85	3.00

Board Number	Title of Article	Issue Dated	Price (£)
A004	"Colne" (RF Amp)	Apr 85	3.10
A005	"Colne" (VFO)	Apr 85	3.10
WR198	"Colne" (Product Det/Audio)	May 85	3.90
WR197	"Colne" (Oscill/Converter)	Jun 85	3.90
WAD302	Battery Charger Controller	Jun 85	3.00
WR200	Low-cost Crystal Tester	Jul 85	2.50
WR201	Add-on BFO	Aug 85	2.50
WR202	Economy UHF Pre-scaler	Sep 85	3.70
WR199	"Meon" 50MHz Transverter	Oct 85	6.70
WR203	Simple Capacitance Meter	Oct 85	2.80
WR204	WQ Medium Wave Loop	Nov 85	3.00
WR205	RTTY/Morse Modem	Jan 86	5.40
WR206	RTTY/Morse Modem (plug-in)	Jan 86	2.80
WR207	Crystal Calibrator	Jan 86	2.10
WR208	RF Speech Processor	Mar 86	4.10
WR209	Simple Audio Oscillator	Mar 86	4.30
WR211	"Meon" Filter	Apr 86	3.10
WR210	"Arun" Parametric Filter	May 86	8.10
WR213	Mod FRG-7 (Carrier Osc)	Jun 86	2.70
WR215	Simple 50MHz Converter	Sep 86	3.60
WR217	Automatic NiCad Charger	Oct 86	2.40
WR220	Get Started Low-cost Converter	Oct 86	2.40
WR216	LF Bands Active Antenna	Nov 86	2.40
WR222	"Taw" VLF Converter	Nov 86	2.80
WR223	High-imp MOSFET Voltmeter	Dec 86	2.90
WR214	Mod SRX-30D (Audio)	Dec 86	3.00
WR224	"Westbury" Basic Wobblulator	Jan 87	3.50
WR218	Masthead Pre-amp for 144MHz	Feb 87	4.20
WR219	Masthead Pre-amp PSU	Feb 87	2.50
WR225	"Woodstock" SW Converter	Mar 87	4.10
WR298	"Itchen" LCR Bridge	Apr 87	3.40
WR226-8 set	"Blandford" Rcvr Converter	Apr 87	9.70
WR230-2 set	"Axe" Signal Tracer	May 87	9.20
WR233	"Downton" F-V Converter	Jun 87	3.90
WR234	Side-tone Oscillator	Jun 87	2.70
WR235	Mains on/off for Batt Radios	Sep 87	3.00
WR236	"Blenheim" VHF Converter	Sep 87	4.50
KANGA	High Stability VFO (see issue)	Oct 87	—
WR237	RTTY Tuning Indicator	Nov 87	5.20
WR238	"Otter" 50MHz Receiver	Jan 88	7.10
WR239-241 set	"Orwell" Medium Wave Recvr	Mar 88	9.10
WR242	"Orwell" Varicap Tune Option	Mar 88	2.90
WR243	VHF Monitor Receiver (Audio)	Apr 88	2.30
WR245	Stopband filter for PW Blenheim	Jun 88	2.90
WR244	Practice Morse Key	Jul 88	2.96
WR246	"Portland" RF Voltmeter	Jul 88	3.59
WR247	Zener Diode Tester	Aug 88	3.56

COMMUNICATION CENTRE OF THE NORTH

The largest range of communications equipment available in the North. Full range of receivers, transceivers, antennas, power supplies, meters. Ali tubing - wall brackets - rotators - insulators.

ANTENNA RANGE

FULL RANGE OF KENWOOD EQUIPMENT AND ACCESSORIES STOCKED

BUTTERNUT

HF2V 40-80m vertical	£142.00
20 MRK 20m add on kit	£33.49
HF6VX 6 band vertical	£159.00
TBR160S 160m Add on kit	£53.99
HF4B Triband Mini Beam	£235.00

CUSHCRAFT

A3 3 element Tribander	£262.00
A4 4 element Tribander	£350.00
10-3CD 3 element 10m	£115.00
15-3CD 3 element 15m	£139.75
20-3C2 3 element 20m	£238.00
AP8 8 band 25ft vertical	£164.00
AV5 5 band 25ft vertical	£123.00
18 element 2m Boomer	£106.00
15 element 2m Boomer	£85.00

ANTENNA TUNERS

Kenwood AT230	£208.00
CAPCO SPC 300D	£225.00
CAPCO SPC 3000D	£325.00
MFJ 962B 1.5k Tuner	£241.00
MFJ 949C 300W Versatuner	£157.00
MFJ 941D watt Basic	£105.00
MFJ 1601 Random Wire Tuner	£42.02
Kenwood AT250 Automatic	£366.00

65RVR full size £16.50, half size £14.50 Full range of Antenna - Accessories plus full range of VHF - UHF - HF mobile Antennas

Full range of RSGB and ARRL publications in stock.

Part Exchanges welcome. Second hand lists daily.

Send S.A.E. for details of any equipment.

HP terms. Access/Barclaycard facilities.

Open 6 days a week. 24 Hour Mail Order Service.

Goods normally despatched by return of post.

WELZ

DCP5 5 band vertical with radial kit	£195.00
DCP4 40-20-15-10 vertical with radial kit	£147.00

JAYBEAM

VR3 3 band vertical	£73.60
TB1 Rotary Dipole	£105.80
Minimax Triband Mini Beam	£327.00
TB2 2 element Tribander	£202.00
TB3 3 element Tribander	£316.00

SWR/POWER METERS

MFJ 815 HF 2kw SWR/PWR	£57.32
SWR Twin Meter 1.8-50MHz	£25.00
DIAWA CN410M 35-150MHz	£61.72
DIAWA CN460M 140-450MHz	£65.40
NS660P 1.8-150MHz + PEP	£115.00
Welz SP10X	£37.00
Welz SP220	£67.95
Welz SP420	£59.95

DUMMY LOADS

DL60 60 watt	£10.96
DL600 600 watt	£62.75
CTS30 500 watt	£59.00
MFJ2600 300 watt	£28.35

HYGAIN

TH2 MK3 2 ele Tribander	£249.00
18 AVT 5 band trapped vertical	£146.00
EXP14 4 element 20-15-10 m	£449.00

Phone 0942-676790.

STEPHENS JAMES LTD.

47 WARRINGTON ROAD,
LEIGH, LANCS. WN7 3EA.

TENNAMAST SCOTLAND

MOBILE, PORTABLE, WALL MOUNTED OR BASE MOUNTED

TENNAMAST ARE FAST BECOMING THE NAME FOR WIND-UP TILT-OVER MASTS. THEY ARE: EASY TO OPERATE - SAFE TO USE - SLIM AND ELEGANT - SUITABLE FOR HF & VHF. DESIGNED AND BUILT PROFESSIONALLY BY ENTHUSIASTS FOR ENTHUSIASTS. WRITE OR TELEPHONE FOR MORE DETAILS. DESPATCHED NORMALLY WITHIN 7 DAYS.

81 MAINS ROAD BEITH AYRSHIRE KA15 2HT.
TEL: (05055) 3824 GM60AL. GM4VHZ.



PRACTICAL WIRELESS KITS

Drwell MW Receiver Excluding case	Feb 88	73.00	Simple 50MHz Converter	Sept 86	21.50
Otter 50MHz Receiver	Jan 88	41.30	Arun Parametric Filter	May 86	49.30
RTTY Tuning Indicator	Nov 87	24.90	Meon 2 50MHz Transverter (144MHz IF)	April 86	41.00
Bienheim v.h.f. to h.f. receive converter	Sept 87	26.50	Meon 2 70MHz Transverter (144MHz IF)	April 86	44.00
Downton. Freq. to Voltage Converter	June 87	19.70	Ritty Morse Modem (exc. case)	Jan 86	31.85
AXE Signal Tracer	May 87	49.00	Two Tone Oscillator	Dec 85	25.30
Iichen. LCR Bridge	April 87	27.90	Meon 50MHz Transverter (28MHz IF)	Oct 85	41.00
Woodstock Short Wave Converter	March 87	26.50	Meon 70MHz Transverter (28MHz IF)	Oct 85	41.00
Masthead Preamp For 144MHz	Feb 87	39.30	Meon 144MHz Transverter (28MHz IF)	Oct 85	41.00
Westbury Basic Wobulator	Jan 87	16.50	Fet Dip Oscillator	Oct 85	21.30
High Impedance Mostel Voltmeter	Dec 86	25.30	Capacitance Meter	Oct 85	12.95
Taw. VLF Converter	Nov 86	14.20	Add On BFO	Aug 85	12.95
Active Antenna	Nov 86	17.80	Morse Sending Trainer	July 84	14.00
Automatic Nicad Charger	Oct 86	18.20	Auto Notch Filter	June 84	25.90

PRICES DO NOT INCLUDE VAT, WHICH SHOULD BE ADDED TO THE TOTAL ORDER VALUE AND P&P CHARGES. P&P = 70p UNLESS SPECIFIED. ARTICLE REPRINTS 50p (IF REQUIRED). ALL KITS ARE COMPLETE (LESS BATTERIES), UNLESS SPECIFIED INCLUDING PCB, CASE, ALL COMPONENTS, CONNECTORS AND HARDWARE. ALL COMPONENTS ARE NEW AND TO FULL SPECIFICATION. CHEQUE, P.O., OR ACCESS TO:

CPL ELECTRONICS, 8 Southdean Close, Hemlington, Middlesbrough, TS8 9HE
TEL: 0642 591157.

Other kits are available plus a wide range of components etc.

ACCESS, MAIL OR TELEPHONE ORDERS WELCOMED. FREE PRICE LIST ON REQUEST.



GAREX ELECTRONICS

WEATHER SATELLITE SYSTEMS

This is the genuine MICROWAVE METEOSAT system, 24 hour geostationary (prediction charts not required).

Not to be confused with cheaper, computer add-on devices that normally utilise the VHF Satellites which are only usable for a few minutes at a time.

Our complete plug in and go package requires no computer, no software, and can be up and running, including dish alignment within 10 minutes.

Nothing more to buy: Dish, Microwave Receiver, Frame Store, 12" B/W Monitor AND ALL PLUGS & CABLES **£995.95**

Expandable to include VHF Satellites and colour. Designed by Timestep Electronics, now supplied by Garex.

NEW

The spectacular NIMBUS system

For stunning animated views of weather events as they move across the globe, this is the COMPLETE GROUND STATION: dish, microwave receiver, RM Nimbus Microcomputer, colour (or B/W) monitor and ALL SOFTWARE, PLUGS AND CABLES. Yes, everything!

More wonders than we can describe in this space!!

Call or write for further details.

VHF SYSTEMS

VHF Active Antenna + 35mm cable **£74.75**

VHF 10 Channel Receiver **£155.25**

Colour Frame Store (suits VHF & Microwave) **£454.25**

SAE for full details and prices of other 'separates'

GAREX VHF RECEIVERS

The celebrated Timothy Edwards designs now owned & manufactured by GAREX.

A simple but versatile design capable of covering spot frequencies in the range 25-200MHz.

Excellent sensitivity (typically better than 0.4µV for 12dB SINAD).

Double superhet (10.7MHz and 455kHz IFs).

Choice of IF bandwidths from weather satellite to '12.5kHz' PMR standards.

The basic receiver is single channel crystal controlled. Multi-channel options.

2 watt audio output stage having a low quiescent current.

Size: 153 x 33mm. Requires 10-14V DC supply.

PRICES:

Stock Versions: (fully assembled, aligned & tested boards) 6m, 4m, 2m & Weather Sat. **£49.95**

Complete cased versions & special options: details & prices on request. Crystals can be supplied if required; most popular 2 metre frequencies and the currently active Weather satellites are readily available. Crystal prices on request.

Mains power supply module **£15.50**

GAREX VHF PREAMPLIFIERS

Compact size: 34 x 9 x 15mm

Up to 26dB gain

Can be made for any frequency in the range 40-200MHz

3dB bandwidth ±3MHz (at 145MHz)

Uses BF981 (0.7dB NF at 200MHz)

Input & output impedance 50 ohms

1dB compression: +10dBm

Saturated output: +15dBm

Supply voltage 8-17V DC at 5-10mA

Stock Versions: (fully assembled, aligned & tested boards) 6m, 4m, 2m, & Weather Sat. **£11.45**

Other versions: prices & details on request.

NEW HIGH PERFORMANCE 2 METER PRE-AMPLIFIER

3 band-pass stages for improved selectivity.

16dB gain with 1dB NF.

RF switched (failsafe action): gas-filled relays.

Assembled, tested **£42.50**

Boxed Version **£49.95**

Main Distributors for REVCO ELECTRONICS LTD.

Ask for details of the latest REVCO "Whippet" and "Kwikfit" antennas and solderless co-axial adaptors (see PW June 87).

Prices include UK P&P and 15% VAT
Ask for details of our Interest Free Credit

GAREX ELECTRONICS

HARROW HOUSE, AKEMAN STREET, TRING HP23 6AA

TEL: TRING (044282) 8580

and CHEDDINGTON (0296) 668684

Callers by appointment only

***** 25th Anniversary Year 1963-1988 *****

USE THIS

SMALL ADS

Whilst prices of goods shown in advertisements are correct at the time of closing for press, readers are advised to check with the advertiser both prices and availability of goods before ordering from non-current issues of the magazine.

The prepaid rate for classified advertisements is 40 pence per word (minimum 12 words), box number 60p extra. Semi-display setting £13.24 per single column centimetre (minimum 2.5 cm). Please add 15% VAT to total. All cheques, postal orders etc., to be made payable to Practical Wireless. Treasury notes should always be sent registered post. Advertisements, together with remittance should be sent to the Classified Advertisement Dept., Practical Wireless, Enefco House, The Quay, Poole, Dorset BH15 1PP. Telephone (0202) 678558.

SPACE

Receivers and Components

YAESU FRG7700M £200, LSG17 R.F. signal generator £80, 073081 6798 after 7p.m. (West Sussex) Mr. HILL.

VHF ACTION RECEIVERS. Hand-compact 54-176MHz/80Ch 11m for aircraft, marine, public-service, ham-radio, utilities, local 2-way etc, squelch and VFO functions. European origin: £32.50 all inclusive, unbeatable value. Taylor D/T, 8 Emmerson Street, Crook, Co Durham, UK. COD/enquiries 0388 763323 (sae details).

QUARTZ CRYSTALS and FILTERS

Large numbers of standard frequencies in stock for amateur, CB, professional and industrial applications. Stock crystals £5.00 each (inc. VAT and UK post). Any frequency or type made-to-order from £6.50. Phone or SAE for lists.

GOLLEDGE ELECTRONICS
Merriott, Somerset, TA16 5NS.
Tel: (0460) 73718.

FREE SCANNER AERIAL with every Realistic PRO-2004 programmable scanner sold. 25-520MHz, 760-1300MHz, 300 memories, carriage free of charge. PRO-2004 349.95 (Access and Visa). Link Electronics, 228 Lincoln Road, Peterborough. Tel. 0733 46770.

RACAL RA 17L 500KHz-30MHz £175, Sony ICF 2011D £300, Sony ICF 7040D £180, Sony WA-6000 Radio Cassette-Corder £100, JRC NRD-525 General Coverage Receiver £845, JST-125D 100W Transceiver £1500. Optional accessories at competitive prices. Please contact E&M DESIGN ASSOCIATES LTD., Tel. 01-391 0545, Fax: 01-391 5258.

RADIO CANADA. Peking, Australia, Voice of America, A Vega 206 (MW/LW/6 x SW) pulls these and dozens more £24.49. Vega Selma 215 (MW/ELW/5 x SW) £35.95. Steepleton FM/MW/AIR band pocket radio £9.95. B.F.O. kit resolves SSB signals on nearly any radio £9.95. Year's guarantee. Return despatch. CORRIGAN-RADIOWATCH, Building 109, Prestwick Airport KA9 2RT.

SCANNER OWNERS. For those of you who wish to hear more, we offer extensive frequency listings and many scanner modifications. For full details send a large S.A.E. to S.S.C. PO Box 71, Bournemouth, Dorset BH19 1DL.

Educational

COURSE FOR CITY & GUILDS, Radio Amateurs Examination. Pass this important examination and obtain your licence, with an RRC Home Study Course. For details of this and other courses (JGCE, GCSE, Career and professional examinations, etc.) write or phone: THE RAPID RESULTS COLLEGE, Dept. JX26, Tuition House, London SW19 4DS. Tel. 01-947 7272 (9am-5pm) or use our 24hr Recordacall Service: 01-946 1102 quoting Dept. JX26.

Service Sheets

TECHNICAL INFO SERVICES (PW)

76 CHURCH STREET, LARKHALL, LANARKSHIRE ML9 1HE

Phone: 0698-884585 Mon-Fri., 9-5, any other time: 0698-883334, for Fast Quotes

WORLD'S LARGEST COLLECTION SERVICE MANUALS - Most unobtainable elsewhere. Prices range from only £4.50 - large s.a.e. any quotation, no obligation to buy. WORLD'S SOLE Suppliers of TV & Video Repair Manuals, etc. from TV TECHNICAL also such publishers as Heinemann, Newnes, TV Technic, Thorn, etc. Every published service sheet in stock, supplied full size, not bits and pieces. CTV's or any combination £3.50 + I.S.A.E.; any other single item £2.50 + I.S.A.E. Complete Circuit Sets for most Videorecorders only £7 set (No service sheets made). L.S.A.E. for QUOTATIONS plus GIANT CATALOGUE - NEWSLETTERS - BARGAINS - FREE S/Sheet as available.

Comprehensive TV Repair Manual £9.50. Complete Radio Service and Repair Course £9.50. Complete Repair & Service Manuals - Mono TV £12.50; CTV £17.00; Video £19.50. Complete Repair Data with Circuit - Mono TV £ 9.50; CTV £12.50; Video £10.50. £3.00 + L.S.A.E. BRINGS THE ONLY COMPREHENSIVE SERVICE SHEETS & MANUALS CATALOGUES plus FREE CHASSIS GUIDE and £4.00 OF VOUCHERS.

For Sale

RCS VARIABLE VOLTAGE D.C. BENCH POWER SUPPLY
0 to 20 volts up to 1.5 amps D.C. Fully stabilised. Twin panel meters for instant voltage and current readings. Overload protection. Fully variable. Operates from 240V A.C. Compact Unit: size 9 x 5 1/2 x 3ins. £36 + Post £2



RADIO COMPONENT SPECIALISTS

ACCESS 337 WHITEHORSE ROAD, CROYDON SURREY, U.K. Tel: 01-684 1665 VISA
List, Large S.A.E. Delivery 7 days Callers Welcome Closed Wednesday

"GRUNDIG" INFRA-RED REMOTE CONTROL "VIF-K1" consists of Transmitter TPV355 & VIF-E1 brand new & boxed £4.99, P&P £2. Box of 10 VIF-E1 £9.99p P&P £3. VIDEO HEADS (GRUNDIG 2x4 Super) with head assembly £29 P&P £2. 2x4 SUPER panels - DIF, SERVO, VIDEO, CROMA, STEREO-TON, MOTOR-BOARD, MODULATOR & TUNER all £5.99 each P&P £1. VIDEO TAPES VCC360 £6.99, VCC480 £7.99 P&P £1. REMOTE CONTROLS suitable for use with FERGUSON, JVC, PHILIPS, SONY, GRUNDIG, ITT brand new boxed £19.95, P&P £1. GRUNDIG 2x4 SUPER STEREO £79 & £89 (callers only). SURPLUS STOCK WANTED. STAN WILLETT'S, (PW), 37 High St., West Bromwich, West Midlands B70 6PB. 021 553 0186.

YAESU 9600, £365 o.n.o. Trio TR-2930, 2M Lm. mobile £195 o.n.o. Tel. (0933) 57943.

FOR SALE YAESU FT290 MK 2, 6 months old with Nicads ext PSU. Excellent condition £300. SWR meter, aerials, also for sale. Please ring Dorking 0306 887485.

* **WORKSHOP SERVICE MANUALS** *
* Any Colour/Mono TV, Amateur Radio, Military *
* Surplus, Music System, Vintage Valve Wireless *
* etc etc £5.00 plus LS.AE. *
* Any Video Recorder. £10.00 plus LS.AE. *
* **FREE Catalogue Unique Repair and** *
* **Data Guides for LS.AE** *
* **MAURITRON (PW),** *
* **8 Cherry Tree Road,** *
* **Chinnor, Oxon, OX9 4QY.** *

Kits

KITS. Miniature transmitter 7014MHz. £4.50, telephone transmitter £5.99. Automatic telephone monitor stops/starts recorder, £6.99. Signal injector/tracer AF/RF, £5.95. Box for above, £1.25. Convert multichannel CB's to 10M, instructions only, £2.50. A.C.E. (PW), 99 Greenheath, Hednesford, Staffs WS12 4AU.

KANGA PRODUCTS

Kits for the Constructor

40W Dummy Load Kit	£7.95
RF Sidelone Generator	£5.95
Marker Kit 10Hz-10Meg	£9.95
Our Ever Popular V.F. O Kit	£9.95
Digital Dial Frequency Counter	£19.95
One Transceiver (on 1 pcb sl)	£25.00
Dual Band Receiver (20 & 30m)	£35.95
160M for the FT77 & FT707	£27.50

(some kits are supplied semi-complete) Please add 85p P&P
PLUS MANY MORE INTERESTING KITS TO BUILD
Send your large SAE now to
KANGA PRODUCTS, 3, LIMES ROAD, FOLKESTONE CT19 4AU

ORDER FORM PLEASE WRITE IN BLOCK CAPITALS

Please insert the advertisement below in the next available issue of Practical Wireless for
insertions. I enclose Cheque/P.O. for £ CAT. heading

NAME

ADDRESS

PRACTICAL WIRELESS
Classified Advertisement Department,
Enefco House, The Quay, Poole,
Dorset BH15 1PP. Telephone (0202) 678558
Rate 40p per word, minimum 12 words.
Box No. 60p extra.
PLEASE ADD 15% VAT TO TOTAL

Company registered in England. Registered No. 1980539. Registered Office: Towngate House, 2 Parkstone Road, Poole, Dorset, BH15 2PJ.

8/88

F.J.P. KITS & COMPONENTS
Kit Manufacturers - Amateur Radio Products
 PROPRIETOR: F. POWELL
 63 Princess Street, Chadsmoor, Cannock, Staffs WS11 2JT
 Telephone (05435) 6487

Please note correct phone no. Don't ADD vat
 We are now offering a better service for 4 and 6 metre users in the way of built kits and
 components. Kits, all kits include box if specified. With full warranty for those not able to
 build these. Full range of components. Send A4 S.A.E. for lists. No stamp no lists.
 P.W. Meon Built for 6-4 metres 10metre IF, 2metre IF 6metre only £75.00
 P.W. Meon for 4metres using a 6metre rig Built only £75.00
 All above are for multimode operation
 Matching 120oh linear built 0.5 watts in £35.00
 Kit NO box including Hrs tank Up to 15w input plus £28.00
 7.5 watt linear for 4.6 metres 0.200mw in £6.50
 R.F. switching see previous ads.
 P.W. R.F. voltmeter July 88 full kit inc box £21.00
 P.W. DRWELL Medium Wave DX Receiver Kit £35.00
 P.W. Westbury 450-480KHz basic Wobulator inc box £15.00
 P.W. Meon Oct 85-Apr 86 Kit for 10m IF £42.00
 P.W. Meon 2metre IF with additional PCB 6metre only £43.50
 Terms: CWO, Cheq, PO, VISA, ACCESS. Order by phone, mail, Delivery. Kits by return
 Built kits 7 days, 14 max all work guaranteed!
 Payment to F.J.P. KITS-COMPONENTS to above address. Prices inc Postage.

Q.S.L. Cards

QSL CARDS New 1988 Impact Designs. Single and multi-colours, personal designs and with American style raised print. For the best value around send s.a.e. to: CONTACT CARDS, 11 Winchcombe Road, Bispham, Blackpool FY5 3HJ.

Clubs & Societies

TELEVISION YOUR INTEREST? You need the British Amateur Television Club, only 16p per year - super magazine. Send SAE to: "Grenchurst", Pinewood Road, High Wycombe, Bucks.

Software

FAX FOR YOUR SPECTRUM

RECEIVE FAX PICTURES ON YOUR SPECTRUM.
 WEATHER MAPS ETC.

REAL TIME CLOCK. CONTRAST CONTROL
 WIDTH CONTROL. SCREEN STORE ETC.

SAVE RECEIVED DATA TO TAPE OR DUMP TO YOUR
 PRINTER.

THE PROGRAMME NEEDS AN EXTERNAL DRUM
 SPEED GENERATOR.

PROGRAMME ONLY £9.00
 DRUM SPEED GENERATOR £24.00

S.A.E. for details of all our products



J & P ELECTRONICS LTD.



New Road Complex, New Road, Kidderminster,
 DY10 1AL. Tel: (0562) 753893

Masts & Antennas

ALTRON TOWER AT32WM head unit. Wall bracket 1980
 £220 o.n.o. 082 581 3356 Sussex.

Miscellaneous

**GVF LOOP ANTENNAS COMPLETE WITH ATU FOR HIGH FREQUENCY HAM
 BAND TRANSMISSION (SWR One to One 40, 15 and 10 and One Five to
 One 80 and 20) AND SWL'S, AND LONG AND MEDIUM WAVE BANDS FOR
 BCL'S. Loops 21 inches square or triangle. DIY projects. No special skills
 required. Circuits, Parts Lists with sources of supply and full assembly data. HIGH
 FREQUENCY LOOP 80 to 10 Metres E5. LONG AND MEDIUM WAVE LOOP FOR
 BCL'S E3. LONG WAVE MEDIUM WAVE AND SHORT WAVE LOOP 1500 to 10
 Metres FOR THE BCL AND SWL. E8. SHORT WAVE ATU FOR USE WITH EITHER
 A LOOP OR LONG WIRE ANTENNA E4. FIELD STRENGTH METER E2. Morse Code
 Practice Unit E2. SAE for details. Photo Copy HRD Manual E4**

F. G. Rylands, 39 Parkside Avenue, Millbrook, Southampton SO1 9AF
 Tel. (0703) 775064

WAVEGUIDE, FLANGES & DISHES. All standard sizes &
 alloys (new material only) from stock. Special sizes to order.
 Call: EARTH STATION 01-228 7876. 22 Howie Street,
 London SW11 4AR.

HEATHKIT U.K. Spares and Service Centre. CEDAR
 1:11:11 CHRONICS, Unit 12, Station Drive, Bredon, Tewkes-
 bury, Glos. Tel. (0684) 73127.

INDEX TO ADVERTISERS

Aerial Techniques	63	Garex	69	Random Electronics	57
AH Supplies	57	Golledge Electronics	70	RAS Nottingham	10
AKD	11			Raycom Communications Systems	25
ARE Communications	2	Howes, CM Communications	43	RST Valve	8
				Rylands FG	71
BNOS	3	Icom (UK) Ltd	4,5,43, Cover 3		
Birkitt J	51	ICS Intertext	51	SEM	63
Bredhurst	35			Short Wave Magazine	71
		J & M Amateur Radio	9	Siskin Electronics	35
Cambridge Kits	10	J & P Electronics Ltd	71	South Midlands Communications	
Circuit	51				6,7,9, Cover 2
Colomor	63	Kanga Products	70	Spectrum Communications	9
CPL Electronics	69	Lake Electronics	51	Stephens James Ltd	69
Cricklewood Electronics	9				
		Maplin	Cover 4	Tandy	15
Datong	35	Mauritron	70	Technical Info Services	70
Dewsbury Electronics	8	Merlin Systems	10	Technical Software	8
Dressler Communications Ltd	10			Tennamast	69
		Quartslab	57		
Elliot Electronics	57			Ward Reg & Co Ltd	63
		Radio Component Specialists	70	Waters & Stanton	29
FJP Kits	71	Radio Shack	72	Wood & Douglas	57

Short Wave Magazine

Short Wave Magazine

RESTORING AN EDDYSTONE 940

Part one of Tim Wright's long awaited article
 on this popular valved receiver from the past.

REGULARS

Airband, Scanning, Seen & Heard,
 Grassroots, What Receiver?

REVIEW

John Waite looks at
 the Panasonic RF-1680L portable receiver.

.....JULY ISSUE OUT NOW.....JULY ISSUE OUT NOW.....

YOUR LOCAL DEALERS

STOKE ON TRENT
MRZ COMMUNICATIONS LTD
 ICOM - Amateur/PMR/Marine/Air, YAESU - Amateur MRZ Desk PSU for ICOM/YAESU Portables. UK and EXPORT
Tel: (0782) 619658

IRELAND
Radcom Electronics
 Icom, Yaesu and most Amateur Radio Accessories ex stock.
NEW PREMISES:-
Unit 4, Albert Quay, Cork City.
Tel: 021-632725 and 088 553947
(Mon-Fri 9-5 and Sat 9-3.45)

LONDON
Henry's
 27MHz/934MHz Rigs & accessories in stock.
 Lists - S.A.E. (A4) - 26p
 Full catalogue (TG/P) - large S.A.E. £1.00
404 Edgware Road, London W2 1ED
Tel: 01-724 0323
 (Open 6 days a week)

ESSEX
Selectronic
 The UK's leading suppliers of 934MHz personal radio equipment
203 High Street, Canvey Island, Essex
Tel: 0268 691481
 (Open Mon-Sat 9-5.30)
 Amateur radio equipment also in stock

HERNE BAY

ICOM (UK) LIMITED
 The Official Icom Importer
Unit 8, Sea Street Herne Bay, Kent CT6 8LD
Tel: 0227 369464
 Fax: 0227 360 155
 Open Mon-Sat 9-5.30, (Lunch 1-2.00 pm)

SOUTHAMPTON
South Midlands Communications
 Official Yaesu Importer
S.M. House, School Close, Chandlers Ford Industrial Estate, Eastleigh Hants SO5 3BY.
Tel: 0703 255111

PORTSMOUTH
Nevada Communications
 Importers of the Nevada range of 934MHz equipment
189, London Road, North End, Portsmouth, Hants, PO2 9AE
Tel: 0705 662145

DEVON
Reg. Ward & Co. Ltd.
 The South-West's largest amateur radio stockist. Approved dealer for Kenwood, Yaesu and Icom
1 Western Parade, West Street, Axminster, Devon, EX13 5NY
Tel: 0297 34918
 (Closed 1.00-2.00 and all day Monday)

BUCKINGHAMSHIRE
Photo-Acoustics Ltd.
 Approved Kenwood, Yaesu and Icom dealer (part exchange always welcome)
58 High Street, Newport Pagnell, Buckinghamshire MK16 8AQ
Tel: 0908 610625
 (Tues-Fri 9.30-5.30, Sat 9.30-4.30)
 Closed Mondays

SOUTH WALES
ELECTRO DISPOSALS
 2000 sq ft of surplus equipment and components
LONLAS WORKSHOPS SKEWEN, NEATH.
Tel: 0792 818451

LONDON
AMCOMM OF LONDON
 Approved dealer for Yaesu and Icom
373 Uxbridge Road, London W3 9RN
Tel: 01-992 5765
 (Mail order a speciality)

TO FILL THIS SPACE CALL:
0202 676033

MERSEYSIDE
MGR SERVICES
 Wirral based communications
 ICOM - YAESU - M. MODULES - HOWES - CIRKIT - WOOD & DOUGLAS - PART-EX - AERIALS - PMR - MARINE - MET ANTENNAS - ALINCO - HEATHERLITE - SPECTRUM COMMS
48, Shrewsbury Road, Oxtou, Birkenhead, L43 2HZ.
Tel: 051 653 3437
 (Callers by appointment 9 am-9 pm, Mon-Sat)


SOUTH WALES MAIL ORDER RETAIL
A.C.S. SYSTEMS
 PACKET RADIO: ST-PC-AMIGA COMPUTERS
 AMATEUR SOFTWARE FOR MOST COMPUTERS
 SATELLITE TELEVISION SYSTEMS
ICS DEALER FOR DATA COMMUNICATIONS
 19, CILHAUL TERRACE, MOUNTAIN ASH, MID GLAMORGAN SOUTH WALES, CF45 3ND. TEL 0443 476040
 SAE CALLERS BY APPOINTMENT 9am-9pm Mon-Sat LIST

CHESHIRE
FLIGHTDECK THE AIRBAND SHOP
 Specialists in Airband and Shortwave receivers.
 Official agents for Sony, Signal, AOR, Revco, Lowe and Kenwood (rec's only)
FAIRBOTHAM & Co. Ltd. 58-62, Lower Hill Gate, Stockport, SK1 3AN.
Tel: 061 480 8080
 (closed 1.00-2.15 & all day Thursdays)

WEST SUSSEX MAIL ORDER RETAIL
BREDHURST ELECTRONICS LTD.
 High St., Handcross, West Sussex
Tel: (0444) 400786
 Situated at the Southern end of M23. Easy access to M25 and South London.
 Open Mon-Fri 9am-5pm except Wed 9am-12.30pm Sat 10am-4pm


DO YOUR HORSE TRADING WITH RADIO SHACK

THE FINEST EVER SCANNER
PRO 2004

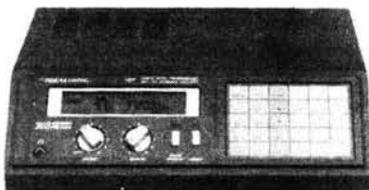

BUNDLED WITH A LOT OF EXTRAS £349.95 FROM RADIO SHACK

DO YOU HAVE AMATEUR RADIO EQUIPMENT THAT YOU WOULD LIKE TO TRADE FOR COMPUTERS, PRINTERS, ETC?

— CALL US —
FOR THE BEST DEAL.

FOR COMMUNICATIONS & COMPUTERS

YAESU
 KENWOOD
 ICOM



TANDY
 COMMODORE
 AMSTRAD
 — ETC —

DAISY, DOT
 AND LASER
 PRINTERS

PSION
 ORGANISERS



RADIO SHACK LTD

188 BROADHURST GARDENS,
 LONDON NW6 3AY



(Just around the corner from West Hampstead Station on the Jubilee Line)

Giro Account No. 588 7151 Telephone: 01-624 7174

Published on the second Thursday of each month by PW Publishing Limited, Eneco House, The Quay, Poole, Dorset BH15 1PP. Printed in England by Benham & Co Limited, Colchester, Essex. Distributed by COMAG, Tavistock Road, West Drayton, Middlesex UB7 7QE, telephone West Drayton 44055, Telex 8813787. Sole Agents for Australia and New Zealand - Gordon and Gotch (Asia) Ltd.; South Africa - Central News Agency Ltd. Subscriptions INLAND £14 and OVERSEAS (by A.S.P.) £18.50, payable to PRACTICAL WIRELESS, Subscription Department, Competition House, Farmdon Road, Market Harborough, Leicestershire LE16 9NR. PRACTICAL WIRELESS is sold subject to the following conditions, namely that it shall not, without the written consent of the Publishers first having been given, be lent, resold, hired out or otherwise disposed of by way of Trade at more than the recommended selling price shown on the cover, and that it shall not be lent, resold, hired out or otherwise disposed of in a mutilated condition or in any unauthorised cover by way of Trade, or affixed to or as part of any publication or advertising, literary or pictorial matter whatsoever.

ICOM

Count on us!

IC-735 Compact HF.



As predicted the Icom IC-735 has rapidly gained the reputation it deserves. This compact transceiver is ideal for mobile, portable or base station operation. It has a general coverage receiver from 0.1Mhz to 30Mhz with superb sensitivity in all modes, SSB, CW, AM and FM. Spectacular specifications are also achieved on RF Intercept, Dynamic Range, Reciprocal Mixing and I.F. Blocking. As HF conditions improve over the next few years it is equipment like the IC-735 that will provide clear reception even under the worst pile-ups.

The IC-735 has a built-in receiver attenuator, preamp, noise blanker and RIT passband tuning and a sharp IF notch filter ensures clear reception. The twin VFO's and 12 memories can store mode and frequency.

Scanning functions include program scan, memory scan and frequency scan. The HM12 scanning microphone is supplied.

RF output is approximately 100 watts and can be continuously adjusted down to 10 watts. The IC-735 is one of the first HF transceivers to use a liquid crystal display, which is easily visible under difficult conditions. Controls that require rare adjustment are situated behind the front cover but are immediately accessible.

Options include the PS-55 AC Power Supply, AT150 Automatic Antenna Tuner, AH2a Automatic Antenna Tuner, SM6 and SM8 Desk Mics, SP7 External Loudspeaker. Why not find out more about the IC-735 contact your local ICOM dealer or contact ICOM (UK) LIMITED.

Icom (UK) Ltd.

Dept PW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 363859. 24 Hour.

Helpline: Telephone us free-of-charge on 0800 521145, Mon-Fri 09.00-13.00 and 14.00-17.30. This service is strictly for obtaining information about or ordering Icom equipment. We regret this cannot be used by dealers or for repair enquiries and parts orders, thank you.

Datapost: Despatch on same day whenever possible.

Access & Barclaycard: Telephone orders taken by our mail order dept. instant credit & interest-free H.P.



**PROJECTS
GALORE FROM
Maplin**

SALES
0702 - 554161

A self-contained alarm system disguised as a video cassette. Gives audible alarm if machine moved or cassette ejected. Full details in Project Book 24 (XA24B) Price 85p.

KIT PRICE
ONLY £11.95 ORDER CODE LM27E



CHECK THOSE UNMARKED

capacitors with this versatile, low-cost, piece of test equipment. Full details in Project Book 23 (XA23A) Price 85p.

KIT PRICE
ONLY £24.95 ORDER CODE LM28F



POWER BREAKTHROUGH!

A superb 1kW Mosfet amplifier, a major new source in sound! Full details in Project Book 26 (XA26D) Price 85p. This project is made up from 4 kits.

KIT PRICE

DRIVER KIT LM50E	OUTPUT KIT LM51F	MONITOR KIT LM52G	PSU KIT LM53H
£11.95	£99.95	£19.95	£89.95

PROTECT YOUR VHS VIDEO PLAYER WITH THIS VHS VIDEO ALARM PROJECT!



MOSFET AMPLIFIER


giving 150W of incredible power! High reliability and performance.



Full details in Best of E & MM (XH61R) Price £1.00.

KIT PRICE
ONLY £19.95 ORDER CODE LW51F

NUCLEAR RADIATION MONITOR

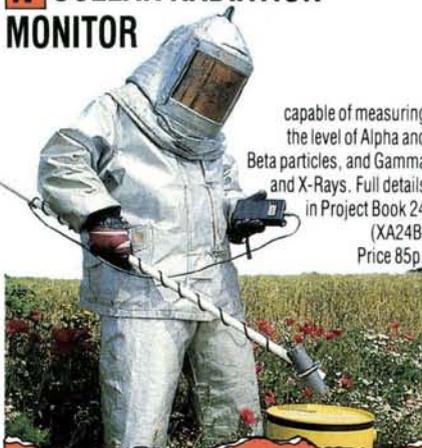

capable of measuring the level of Alpha and Beta particles, and Gamma and X-Rays. Full details in Project Book 24 (XA24B) Price 85p.

KIT PRICE
ONLY £99.95 ORDER CODE LM24B

All prices include VAT. Please add 50p towards postage.

MUSICAL DOORBELL

with 28 tunes and chimes with selectable piano to organ like sounds. Note: case and front panel not in kit. For full details see Project Book 13 (XA13P) Price 85p.



KIT PRICE
ONLY £14.95 ORDER CODE LK57M

Maplin Electronics
P.O. Box 3, Rayleigh, Essex, SS6 8LR.

MANY MORE PROJECTS INSIDE!

Pick up a copy of our giant 512 page catalogue from WHSMITH for just £1.60.



Shops at: Sutton New Road, Erdington, Birmingham. 302 Gloucester Road, Bristol. 159-161 King Street, Hammersmith, London. 8 Oxford Road, Manchester. 46-48 Bevois Valley Road, Southampton. 282-284 London Road, Southend-on-Sea.

All items subject to availability