

# 55swg!



This is the size of the needle shown in the macro-photograph on the left. It has been threaded with copper wire and fine nylon. We cannot illustrate the wire actual size; no printing process is sensitive enough to show a line .0005" thick.

At BICC we draw wires as fine as this for a wide range of micro-miniature applications. We also enamel them with Bicelflux self-fluxing polyurethane based enamel.

If you have any fine wire problems, discuss them with our engineers at BICC Wire Mill Division, Prescott, Lancashire.

They know the answers.

## BICC

### FOR THE FINEST COPPER WIRE

BRITISH INSULATED CALLENDER'S CABLES  
LIMITED  
21, BLOOMSBURY STREET, LONDON W.C.1

Hiffe Electrical Publications Ltd.,  
Dorset House, Stamford Street,  
London, S.E.1

*Managing Director:*

W. E. MILLER, M.A., M.I.E.R.E.

*Editor:*

F. L. DEVEREUX, B.Sc.

*Assistant Editors:*

H. W. BARNARD

T. E. IVALL

*Editorial*

D. C. ROLFE

G. B. SHORTER, B.Sc.

*Drawing Office:*

H. J. COOKE

*Production:*

D. R. BRAY

*Advertisements:*

G. BENTON ROWELL  
(Manager)

J. R. EYTON-JONES

Please address to Editor, Advertisement  
Manager or Publisher as appropriate

© Hiffe Electrical Publications  
Ltd., 1965. Permission in writing  
from the Editor must first be  
obtained before letterpress or  
illustrations are reproduced from  
this journal. Brief extracts or  
comments are allowed provided  
acknowledgement to the journal  
is given.

VOLUME 71 No. 1

PRICE: 3s 0d.

FIFTY-FOURTH YEAR  
OF PUBLICATION


# Wireless World

ELECTRONICS, TELEVISION, RADIO, AUDIO

## JANUARY 1965

- 1 Editorial Comment
- 2 Transistor High-quality Audio Amplifier *By J. Dinsdale*
- 10 Electronic Laboratory Instrument Practice—1 *By T. D. Towers*
- 16 Recent Technical Developments
- 17 Oscar III *By W. H. Allen*
- 18 Miniature Selenium Rectifiers for Television E.H.T. *By J. L. Storr-Best*
- 24 Monostable Blocking Oscillator *By M. D. A. B. Rackowe*
- 26 Units *By "Cathode Ray"*
- 28 H.F. Predictions—January
- 29 World of Wireless
- 31 Personalities
- 33 Conferences and Exhibitions
- 34 Books Received
- 35 Manufacturers' Products
- 41 Letters to the Editor
- 44 Logic Without Tears *By H. R. Henly*
- 50 Commercial Literature
- 51 "Chorus" *By M. Lorant*
- 53 January Meetings
- 54 News from Industry
- 56 Real and Imaginary *By "Vector"*

PUBLISHED MONTHLY (4th Monday of preceding month). Telephone: Waterloo 3333  
(70 lines). Telegrams: "Ethaworld, London Telex." Cables: "Ethaworld, London, S.E.1."  
Annual Subscriptions: Home £2 0s 0d. Overseas £2 5s 0d. Canada and U.S.A. \$6.50. Second-class  
mail privileges authorised at New York N.Y. BRANCH OFFICES: BIRMINGHAM: King  
Edward House, New Street, 2. Telephone: Midland 7191. BRISTOL: 11, Marsh Street, 1.  
Telephone: Bristol 21491/2. COVENTRY: 8-10, Corporation Street. Telephone: Coventry  
25210. GLASGOW: 123, Hope Street, C.2. Telephone: Central 1265-6. MANCHESTER:  
260, Deansgate, 3. Telephone: Blackfriars 4412. NEW YORK OFFICE U.S.A.: 111,  
Broadway, 6. Telephone: Digby 9-1197.

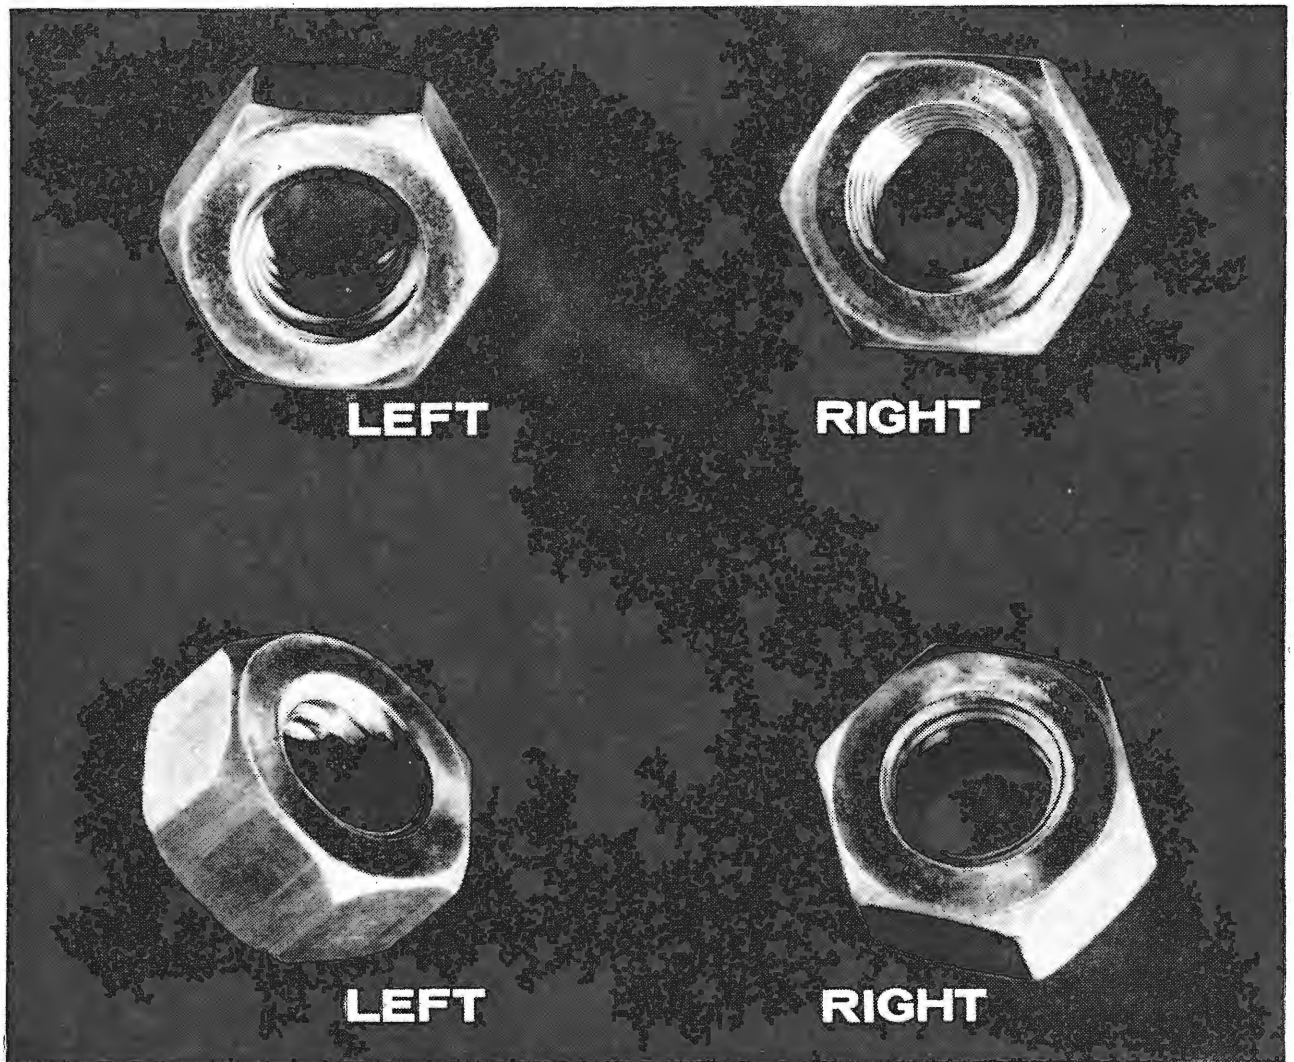

## TV SERVICING'S

**NEW**

You can forget about old-style servicing. The independently mounted 'Panorama' direct vision tube can be fixed or unfixed in minutes. It's as simple as four nuts.

## MARCHING ORDERS

One for each of the Panorama's four conveniently positioned mounting lugs. Left, right, left, right. Servicing was never easier. For the first time ever you can forget about dust seals and mounting accessories. And remember, 'Panorama' direct vision introduces: \* sharper, brighter pictures with no dust or multiple reflections. \* truer picture realism thanks to elimination of protective screen. \* new freedom in TV styling.

# Mullard

## PANORAMA PICTURE TUBES

1WW-116 FOR FURTHER DETAILS.

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# Wireless World

ELECTRONICS, TELEVISION, RADIO, AUDIO

## Dissemination and Retrieval of Information

AMONG the research projects put forward by the National Electronics Research Council, high priority has been given to the retrieval of information. Lord Mountbatten, in his speech last autumn to the Conference of the Electronics Industry, was able to announce the appointment of a full-time qualified specialist to work with the N.E.R.C. Committee on the scientific Dissemination of Information. Of the new venture he had this to say:—

“Our system will use a computer to select from the hundreds of papers and articles published every week the references to those of interest to each particular research worker throughout the country. It will incorporate a feedback loop to allow changes in the interests of each research worker to be embodied in the system. In addition to separate lists for each research worker, a weekly listing of all new material will be provided and there will be facilities for retrospective searching by computer. This project can, of course, be developed to serve all branches of science and industry. We believe it will take about three years to develop this project to the full and we hope to make a major breakthrough in tackling the information explosion problem.”

This project, when completed, will bear comparison in scale with similar work in America and Russia and will powerfully supplement, if it does not supersede, other systems for running down the facts needed. It will not, however, solve the problems of deciding what is to go into the stores (we use the plural advisedly) or what to do with the jackpot when any particular button is pressed.

If the solution to the first problem is to include everything, does that mean also the commercial and military secrets of industry and Government? Obviously there must be selection and segregation, which raises the question of who is to make the final choice. The process of filtration begins earlier when the author commits his thoughts to paper. It is continued by his employer before giving permission to publish, then by the editor of a journal or the referees of a learned society and finally by indexers, librarians, data processors and the custodians of computers. But what of the many papers which are never published? Should not these rejects be systematized also, if only to give someone the opportunity of discovering a latter-day F. W. Lanchester or O. Heaviside?

With the enormous bulk of material to be handled there may be a temptation to rely on titles and synopses. We hope that indexers will find time to read more deeply. Authors' titles are often changed, sometimes to reduce them to manageable length, quite often to enhance what the editor regards as the main interest of the contents. How is an editor or an indexer to know that the future value of a paper on, say, the neurophysiology of the cochlea of the cat may rest on a new technique of d.c. amplification which was used to obtain the results? Values change and any system of selection and indexing must be capable of constant revision.


The growth and decline of value affects also the processes of retrieval. At the frontiers of knowledge where the need is greatest, one cannot afford to take chances. The jackpot must contain everything. The coinage will be strange and only time will show what is sound and what spurious. Hence the need for constant re-assessment and the removal (not the rejection) of “rubbish” to another bin.

We hope that the system of retrieval which finally emerges will permit access at different levels as well as at vertical divisions of subject. At the foundation would be found the classical text-books; above these the co-ordinating papers which acknowledged authorities should feel it their duty to write from time to time; still higher those papers which statistical analysis shows to have appeared frequently in bibliographies; and above all the uncondensed froth of current literature.

Computers will have their place in converting data into information, but the process of turning information into knowledge and ultimately into understanding is essentially a human problem involving consensus of opinion based on individual effort and choice.

VOL 71 NO 1  
JANUARY 1965

Stereo/Mono Integrated Version, Mk II

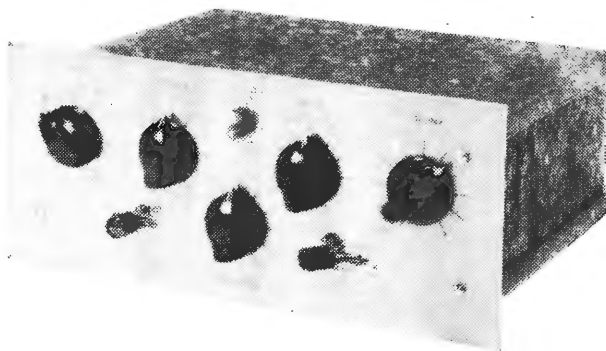

# TRANSISTOR HIGH-QUALITY AUDIO AMPLIFIER

By J. DINSDALE,\* M.A.

SINCE the publication three years ago of articles describing a transistorized high-quality amplifier<sup>1</sup> and pre-amplifier,<sup>2</sup> prolonged listening tests and series of measurements have been conducted both on this design and on several commercial systems which are becoming available. In addition, I have received a wealth of constructive comment (and criticism) from colleagues and readers of *Wireless World*, many of whom bear out my own feelings. The appearance, moreover, of several articles on transistor amplifiers, notably by P. Tharma, T. D. Towers and the series by O. Greiter, show that the trend to transistor units has become firmly established. In short, I believe that the time has arrived to examine in greater detail some aspects of the original design and to describe some modifications which may be made to improve the performance.

## General Specification

It was decided to maintain the basic specification of the original amplifier and follow normal commercial figures as far as possible. Thus the input sensitivities are 4 mV for magnetic pickups and 400 mV for crystal pickups. The "auxiliary" input may be used for radio tuner (80 mV) microphone (5 mV) or tape head (3 mV).

Treble and bass controls are provided, together with a switched low-pass filter and an improved infinitely variable balance control. The use of low-noise transistors maintains a satisfactory background level even at full volume. The input level to the power amplifier is 100 mV for 10 watts output, and the frequency response of the complete system is flat within 2 dB from 35 c/s to 20 kc/s, with a total harmonic distortion of under 0.2% at 10 watts.

## Input Impedance

It was stated in the original article (and has been reiterated more recently) that the most efficient way of designing pre-amplifiers for low sensitivity magnetic pickups and tape replay heads is to work into a low-impedance load and utilize the inductance of the trans-

ducer in series with this low impedance to achieve the h.f. de-emphasis in the replay characteristics, as shown in Fig. 1. The advantages claimed for this mode of operation are twofold.

(i) The transistor is a current-operated device and therefore a low-impedance source will raise the sensitivity of the input stage and hence that of the pre-amplifier.

(ii) The noise generated in the input transistor may

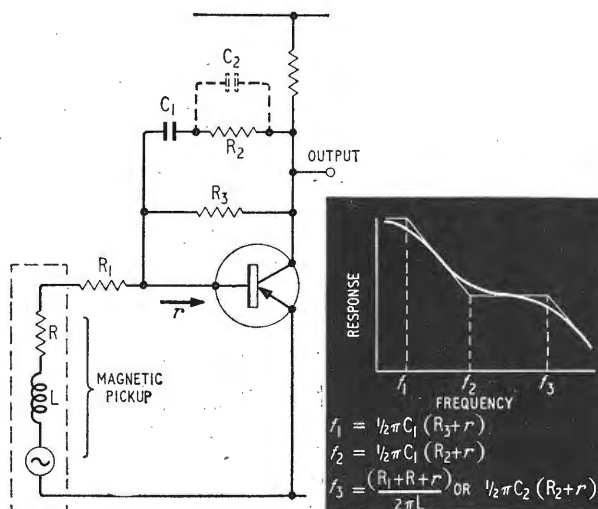


Fig. 1. Method used in the original (1961) design for equalization of magnetic pickups.  $C_2$  is used only when  $R_1$  is large enough to remove the effect of  $L$  from the audio spectrum.

be minimized by connecting the base to ground via a low-impedance (e.g., the pickup). Unfortunately there are certain side effects which detract from the apparent

\* Elliott Brothers (London) Ltd.

advantages of this system and, indeed, when a stereo pickup is used, can become most undesirable.

For example, one of the main problems in the design of stereophonic pickup heads is to reduce crosstalk between channels to a satisfactory level (better than 20dB) over the full frequency range, but especially above 2kc/s, where most of the directional information is found. While this figure may be approached in the modern high-quality instrument, it will only apply when the currents flowing in the component coils are negligible, for two reasons.

(i) The magnetic field set up by the current will be sufficient to cause a reduction in channel separation due to the proximity of the coils in the confined space available inside the head causing direct transformer coupling between channels.

(ii) A more serious effect occurs with the sum-and-difference type of pickup (e.g. the Decca "ffss" and E.M.I. EPU100) where a common coil carries the lateral signal before being combined with each phase of the vertical signal to form the complete output. Both left- and right-hand currents flow in the common lateral coil and owing to the impedance of this coil (2 to 12kΩ depending on the frequency) considerable crosstalk will result. Indeed the Decca "ffss" Mk. I head and Decca Stereo test record SXL 2057 produced 2 kc/s signals in each channel of the original pre-amplifier of only 6 dB difference, although only one channel contained recorded information. An analysis is given in the Appendix.

A further practical difficulty concerns the use of pickups with widely differing inductances (as may happen for example in demonstrations and tests). It is inconvenient to change the input resistor continually and, moreover, there comes a time when the inductance of a particular pickup is so low that even without any series resistor the input impedance of the transistor is itself too high to

TABLE I—COMPONENT VALUES FOR FIG. 2

R1	100kΩ	2%, high stability	R17	8.2kΩ	2%, high stability
R2	68kΩ	2%, high stability	R18	56kΩ	2%, high stability
R3	100kΩ	2%, high stability	R19	10kΩ	
R4	82kΩ	2%, high stability	R20	8.2kΩ	2%, high stability
R5	10kΩ	2%, high stability	R21	15kΩ	2%, high stability
R6	12kΩ		R22	3.3kΩ	
R7	12kΩ		R23	3.3kΩ	
R8	22kΩ		R24	2.7kΩ	
R9	5.6kΩ		R25	2.7kΩ	
R10	1.2kΩ		R26	2.2kΩ	
R11	10kΩ		R27	6.8kΩ	
R12	4.7kΩ		R28	33kΩ	
R13	470Ω		R29	2.2kΩ	
R14	1.8kΩ		R30	2.2kΩ	
R15	180kΩ	2%, high stability	R31	1kΩ	
R16	15kΩ	2%, high stability	R32	10kΩ	If used with 40-volt supply.

All resistors  $\frac{1}{4}$ watt, and 5% unless otherwise stated.

C1	200μF	6V wkg. electrolytic	C14	0.12μF	5%
C2	10μF	6V wkg. electrolytic	C15	0.01μF	5%
C3	50μF	6V wkg. electrolytic	C16	0.0068μF	5%
C4	50μF	6V wkg. electrolytic	C17	0.1μF	5%
C5	10μF	6V wkg. electrolytic	C18	25μF	15V.W. electrolytic
C6	100μF	6V wkg. electrolytic	C19	0.0033μF	5%
C7	0.0047μF	5%	C20	0.01μF	5%
C8	0.015μF	5%	C21	100μF	6V.W. electrolytic
C9	0.0068μF	5%	C22	0.001μF	5%
C10	0.047μF	5%	C23	0.0047μF	5%
C11	0.0047μF	5%	C24	0.01μF	5%
C12	10μF	15V.W. electrolytic	C25	10μF	6V.W. electrolytic
C13	50μF	20V.W. electrolytic	C26	50μF	20V.W. electrolytic

In the prototype the small electrolytics used were Wima "Printlyt", or Plessey miniature (not subminiature), larger (1000μF+), Plessey "CE", and other capacitors Mullard Polyester 125V.

RV1	Bass	50kΩ + 50kΩ linear	} Morganite Type AG
RV2	Treble	25kΩ + 25kΩ linear	
RV3	Balance	10kΩ log. + 10kΩ, antilog.	
RV4	Volume	10kΩ + 10kΩ, log	

S1	Input	4-pole 5-way (2-bank)	Model DH, NSF
S2	Filter	2-pole 3-way	Model TG, NSF
S3	Function	3-pole 3-way	Model TG, NSF

Vt 1, 2, 3. OC44, OC75, AC107, GET880, etc. ( $h_{fe} > 60$  at  $I_0 = 1$  mA.)

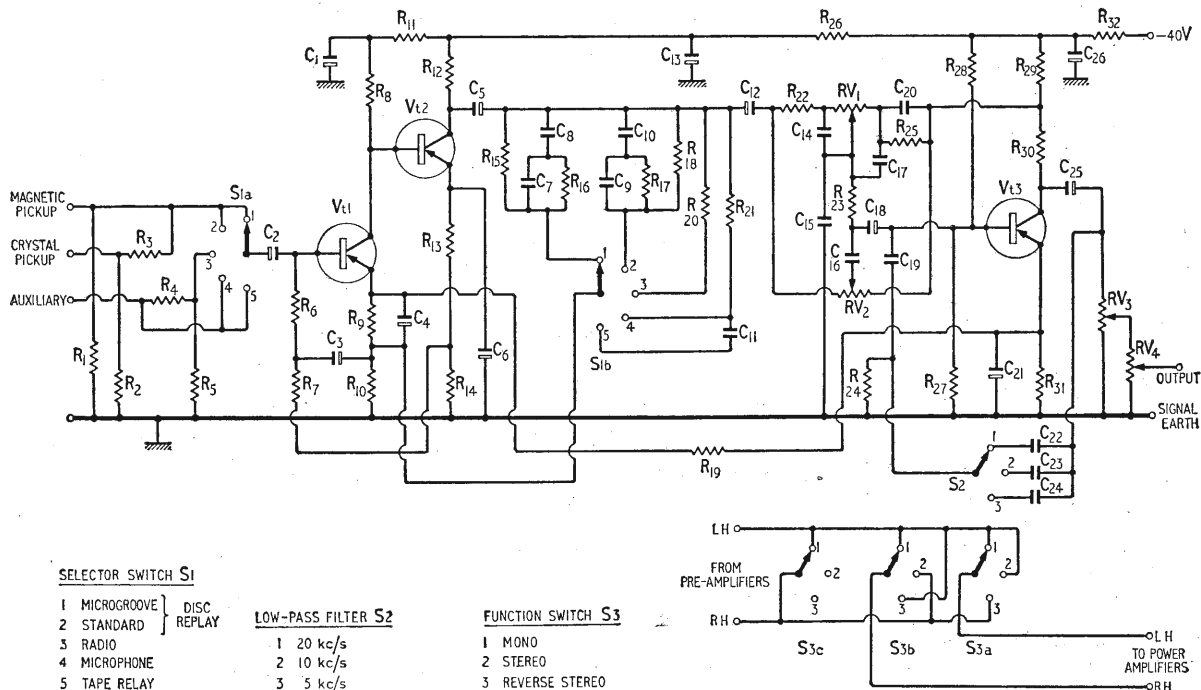


Fig. 2. Circuit of revised pre-amplifier with high input impedance.

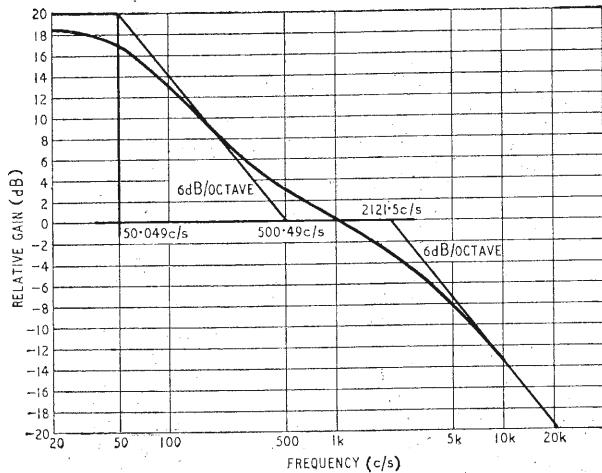


Fig. 3. R.I.A.A. microgroove characteristic.


allow for accurate equalization. This also raises another point: that one should not be forced to rely on the inductance of a particular manufacturer's device being maintained to close limits over a prolonged period of production. All the above stresses the need for an input impedance high enough to keep the accompanying L/R roll-off well outside the audio band, provided that the noise figure does not rise unduly. Equalization for the recording characteristic may then be achieved by conventional feedback networks.

### Revised Pre-amplifier

The new pre-amplifier circuit Fig. 2 follows the basic form of the original, but with a completely new input stage. Two transistors are used in this stage with heavy a.c. feedback via  $C_3$  and  $R_6$ . This has the effect of increasing the input impedance at the base of Vt1 to about 500k $\Omega$ , while at the same time keeping noise to a minimum since the base of Vt1 can still be loaded to ground via the impedance of the transducer. (This, of course, would not happen if the problem of raising the input impedance had been solved merely by adding a suitable series input resistor and increasing the sensitivity.) Since the actual impedance is frequency-dependent and is in any case far higher than is normally required, a padding resistance has been incorporated in each input network to stabilize the value over the audio band.

Equalization is again performed by feedback, but taken

Fig. 4. Feedback network for R.I.A.A. disc equalization.



33 $\frac{1}{3}$ AND 45 r.p.m.		78 r.p.m.	
$C_1 R_1 = 2,940$		$C_1 R_1 = 2,780$	
$C_2 R_2 = 81.2$		$C_2 R_2 = 57.3$	
$\frac{R_1}{R_2} = 12.4$		$\frac{R_1}{R_2} = 7.08$	
(C IN MICROFARADS, R IN OHMS)			

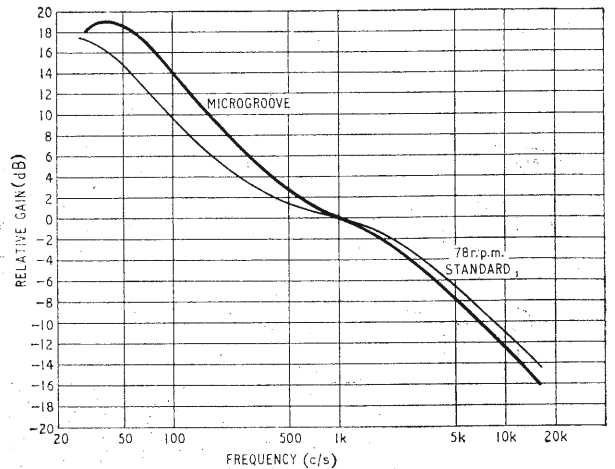


Fig. 5. Disc replay response curves.

this time from the collector of Vt2 to *emitter* of Vt1, since the first stage is no longer a virtual-earth amplifier with an input impedance of effectively zero, and any feedback from the collector of Vt2 to the *base* of Vt1 would reduce the high input impedance.

This first stage has a voltage gain of approximately 10 in its most sensitive mode (microphone and magnetic pickup inputs) and is followed by the output stage consisting of a single transistor Vt3. This stage is very similar to the original article, and incorporates negative feedback tone controls and low-pass filters. Overall negative feedback from the emitter of Vt3 via  $R_{11}$  provides additional stability at very low frequencies.

### Magnetic Pickup Input

Since all pickups operating on the electromagnetic principle have a velocity characteristic, i.e. the output is proportional to the velocity of the stylus, the output will be identical to the recording characteristic and equalization is necessary. It was decided to provide equalization to the RIAA specification for both microgroove and standard recordings, since this has been the International Standard since 1955. The microgroove characteristic is detailed in Fig. 3, and the calculated turnover frequencies occur at 50.049c/s, 500.49c/s and 2121.5c/s. The characteristic may be achieved by three separate networks with a buffer stage between each to prevent interaction, but if, as in most applications, a single network is to be used, the parameters are as shown in Fig. 4. A convenient way of determining the component values is to choose  $R_2$  to provide the required sensitivity and then calculate the remaining values. Thus in the present design if  $R_2 = 15k\Omega$ , for microgroove,

$R_1 = 186 k\Omega$  (omitted since its effect is negligible<sup>†</sup>)

$C_1 = 16,300 pF$ , nearest value 15,000 pF

$C_2 = 5,400 pF$ , nearest value 4,700 pF

Similarly if  $R_2 = 8.2 k\Omega$  for 78 r.p.m. standard discs,

$R_1 = 58 k\Omega$  (omitted)<sup>†</sup>

$C_1 = 48,000 pF$ , nearest value 47,000 pF

$C_2 = 7,000 pF$ , nearest value 6,800 pF

In the prototype, the above values were found to give

<sup>†</sup> These resistors will, in fact, reduce the response by about 1dB at 50c/s, and provision for fitting them if desired has been made on the printed circuit. The curves in Fig. 5 were measured *without* these resistors.



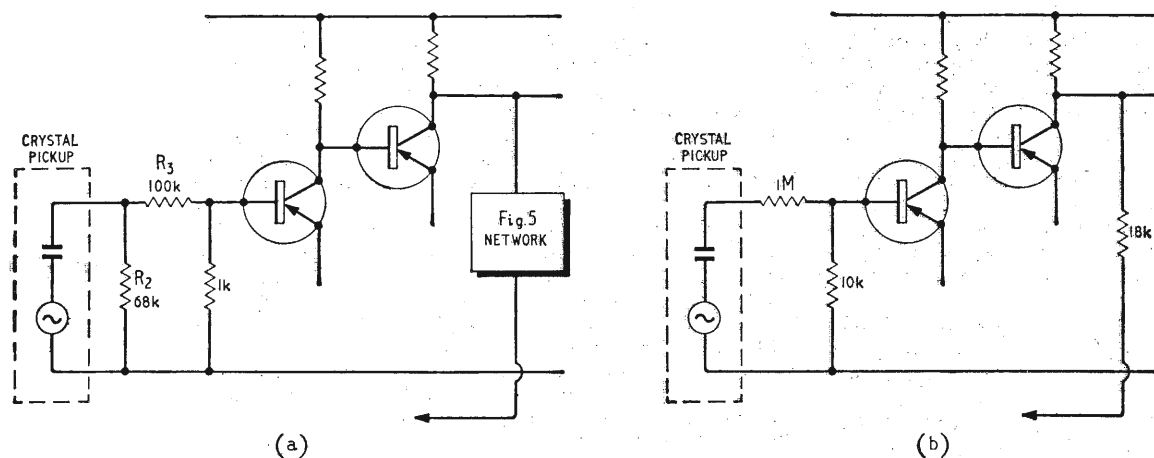


Fig. 6. Two methods of equalization for crystal pickups. (a) Velocity loading. (b) Normal loading.

responses within 1 dB of the standard curves as shown in Fig. 5.

The frequency of the roll-off produced by the inductance of the pickup is given by  $f = \frac{R_{in}}{2\pi L}$  where  $R_{in}$

is the input impedance of the pre-amplifier (100 k $\Omega$  in this case). Thus for an inductance of 600 mH, a high figure,

$$f = \frac{10^5}{2\pi \times 0.6} = 25 \text{ kc/s}$$

which is sufficiently high to avoid interference with the characteristic.

### Crystal Pickup Input

Piezoelectric (crystal) transducers are capacitive sources, and produce an output proportional to the amplitude of the signal. Thus provided negligible current flows no equalization is necessary; an input impedance of 1 M $\Omega$  to 2 M $\Omega$  will achieve this, and an additional position—"Crystal pickup"—may be added to S1, the input consisting of a 1 M $\Omega$  and 10 k $\Omega$  potentiometer (to allow for the high output level of crystal pickups and also to load the base of Vt1 to ground via a low impedance to preserve the signal-to-noise ratio), and a with a single 18 k $\Omega$  resistor in the feedback network. This will give a sensi-

tivity of 400 mV, which is typical of modern high-quality instruments. However, in the prototype it was decided to utilize the existing equalization networks by "velocity loading" the crystal pickup, i.e. loading the pickup until the output approximated to an electromagnetic characteristic and then equalizing as before. A load of approximately 68 k $\Omega$  will achieve this with the majority of pickups, and the resistor  $R_2$  on the crystal pickup input provides this impedance.


It is difficult to maintain the necessary loading requirements for both magnetic and crystal pickups in this mode of operation, and the solution adopted here is to load the magnetic pickup input to ground via a low resistance when a crystal pickup is to be used. This may be achieved either by the use of jack plugs and sockets or (in this instance) by inserting a spare coaxial plug containing the extra resistor. It must be emphasized that this is by no means an accurate "impedance matching" component—it is used solely to allow for the high output of these pickups and to ensure a very low noise figure. A 1 k $\Omega$  resistor will result in a sensitivity of 400 mV as before. The two arrangements are shown in Fig. 6. If a higher output device is used additional attenuation may be provided by reducing the additional resistor (and, incidentally, improving still further the signal-to-noise ratio). Thus if the resistor is made 470 ohms, the sensitivity is reduced to 1 volt.


### Auxiliary Inputs

In the "Radio" and "Microphone" positions a flat response is achieved by simple resistive feedback via  $R_{20}$  and  $R_{21}$ , sensitivities being 80 mV and 5 mV respectively. The "Tape" input provides equalization to the C.C.I.R. standard for a tape speed of 7½ inches per second. The characteristic within 1 dB of the standard from 70 c/s to 15 kc/s is shown in Fig. 7 and is independent of the replay head inductance. If preferred, equalization may be carried out at the tape deck, and the selector switch set to the "Radio" position for a flat characteristic. The sensitivity as drawn is 3 mV.

The signal-to-noise ratio is typically -70 dB (wideband measurement), but this may be increased to -85 dB by selecting transistors. Harmonic distortion is of the order of 0.01%, for signals up to 20 dB overload, when it rises sharply.

Fig. 7. Tape replay characteristic with equalization for 7½ in/sec.

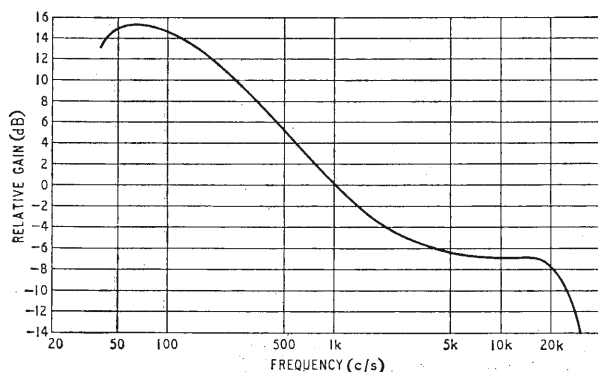

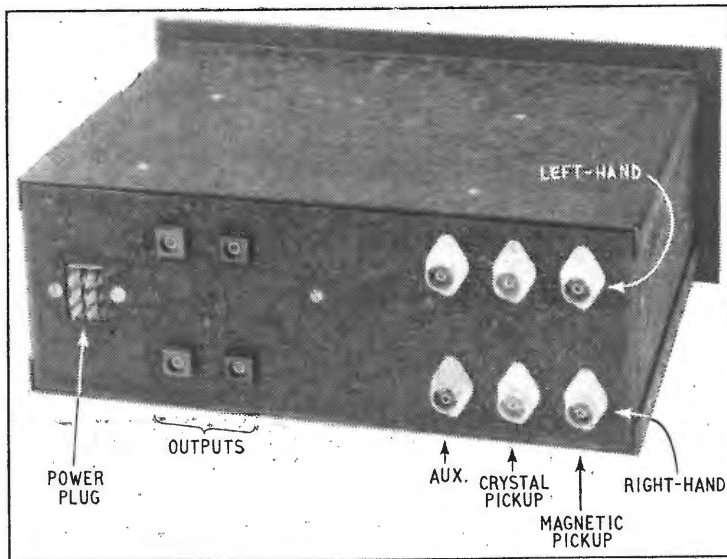

Rear view showing arrangement of input and output sockets.

The pre-amplifier will operate off the main amplifier 40-volt line with a suitable series dropping resistor  $R_{32}$ . Otherwise a 12-volt source is adequate. The current consumption is 2.7 mA.

### Tone Controls

The tone control and filter circuits are very similar to the original design, being performed by negative feedback around the final stage. The tone control consists of a Baxandall network at the input to  $Vt3$ . For correct operation, the two capacitors  $C_{14}$  and  $C_{17}$  should be close-tolerance components. The use of switched tone controls is of doubtful value in a mono equipment except to obtain an accurate "level" position at the centre of the control. However, in stereo systems the more accurate ganging between channels obtainable with switched controls may be an added advantage. Ganged potentiometers are now available, however, accurate to within 1 dB at little extra charge. The tone control characteristics are shown in Fig. 8.

Three fixed low-pass filters were provided giving cut-off frequencies of 20 kc/s ("flat") 10 kc/s and 5 kc/s. As in the original design, the slope of attenuation varies with the setting of the corresponding tone control, since both filter and tone control are achieved by feedback round the same transistor. The maximum boost position of the tone control gives the greatest slope of the corresponding filter. This ensures maximum discrimination against frequencies outside the audio band, when they would otherwise prove most objectionable. The filter characteristic is shown in Fig 9.

### Balance

The original form of balance control (Fig. 10) was abandoned since its operation (by varying the collector load of the output transistor) resulted in noise at the output, and gave insufficient variation in channel gains to compensate (for example) for a different loudspeaker on each channel. In addition the tone controls were affected unequally by altering the fraction of the output fed back, since this fraction is determined by the ratio  $R_A : R_A + R_B$ , and for identical performance from both channels this ratio must be maintained.

The new design uses a conventional log/antilog ganged potentiometer at the output for minimum attenuation at the balance point and infinite variation between channels.

It would be possible to use a dual ganged linear potentiometer, but as will be seen in Fig. 11, this results in an attenuation of 50% at the central (balance) point,

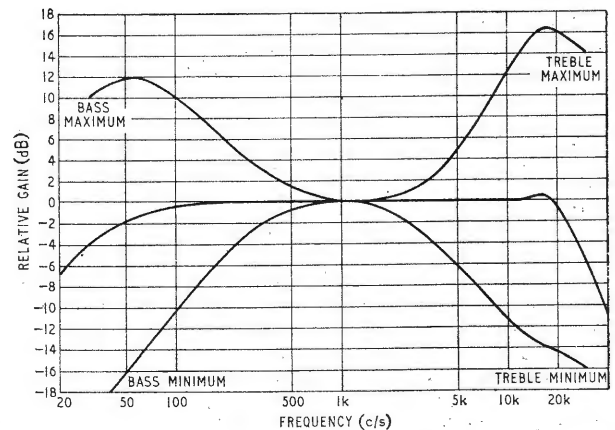


Fig. 8. Pre-amplifier tone control characteristics (low-pass filter at 20kc/s).

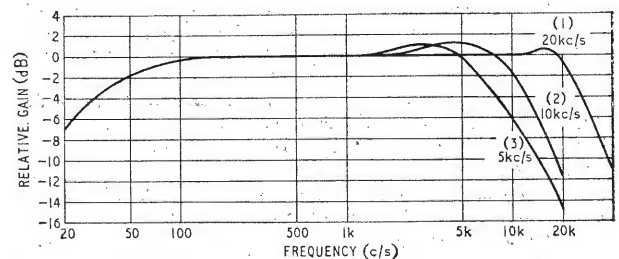


Fig. 9. Low-pass filter response (radio input).

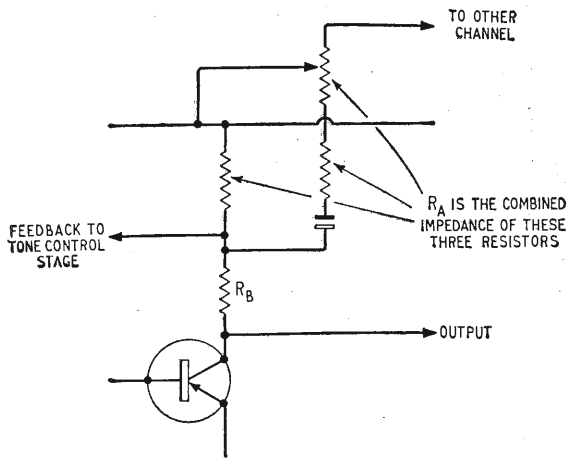


Fig. 10. Original balance control.

while the use of a log/antilog combination results in an attenuation of only 10%.

Since the volume control further loads the wiper of the balance control to earth via  $10\text{ k}\Omega$ , the above attenuation figures become approximately 60% and 15% respectively.

### Power Amplifier

Turning now to the power amplifier circuit, Fig. 12, several points arise that may be modified quite readily to give improved performance.

(i) When switching on this amplifier there is a loud "plop" from the loudspeaker owing to the output capacitor  $C_7$  charging to approximately half the supply voltage. While this may be aggravating (acting as it does like the "Surprise" in Haydn's Symphony) it does at least signify (in the absence of hum and noise) that the equipment is "on." However, on a more serious note it may spell ruin to a loudspeaker system costing four times the price of the amplifier. A simple, if bulky, remedy is to use two capacitors in series across the supply, thus providing an artificial a.c. centre tap.

(ii) The bootstrap capacitor  $C_6$ , while linearizing the l.f. response may also induce distortion by pulling  $V_{t3}$  into the non-linear (bottoming) region of its characteristic on large negative-going signals. It has therefore proved worthwhile to connect a  $1\text{ k}\Omega$  resistor in series to minimize this effect. The capacitor still improves the l.f. response, though to a slightly less extent.

In both the original articles the need for correct earthing was emphasized since a 1-amp pulse of current in 1 milliohm of wire will produce a p.d. of 1 millivolt, one quarter of the input sensitivity on magnetic pickups. The current pulses in the earth line are asymmetrical, causing severe even-harmonic distortion.

Unfortunately, the stereo equipment will inevitably destroy the utility of all the above by causing an obvious but unavoidable earth loop. Fig. 13 shows two similar amplifiers operating from the same power supply (with individual decoupling). The signal earth points at the inputs will both differ by several hundred millivolts from true earth depending on the signal in each channel. Connection of a commercial stereophonic pickup or microphone with a common earth line now causes each

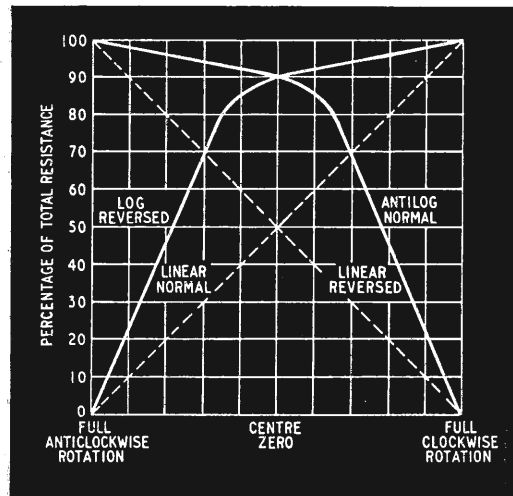


Fig. 11. Dual-gang log-antilog balance control gives less attenuation at centre point.

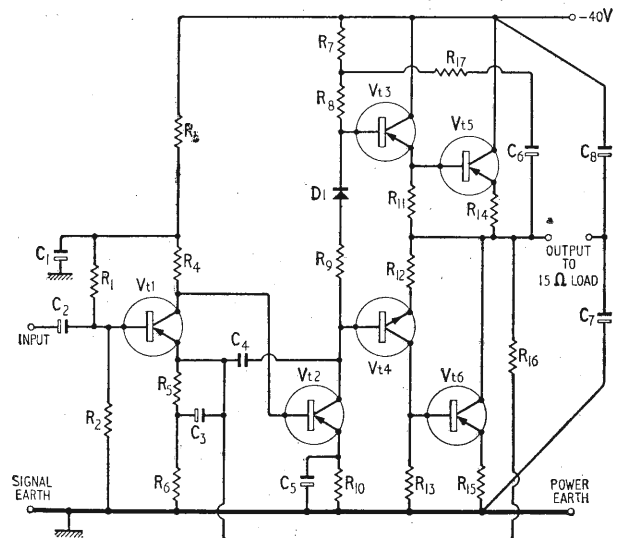


Fig. 12. Circuit of original power amplifier.

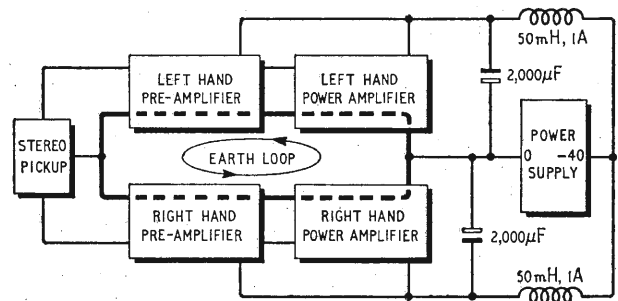


Fig. 13. Earth loop in stereo system.

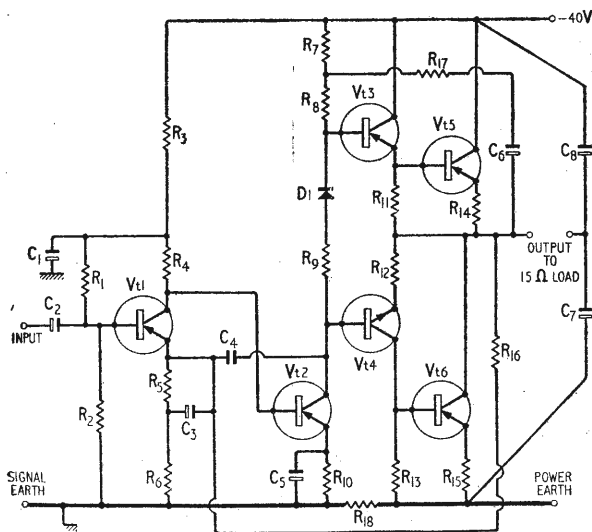


Fig. 14. Circuit of revised power amplifier.

channel to become distorted by the even harmonic products of *both* channels, causing unpleasant distortion particularly when one channel has a transient such as a cymbal clash.

To overcome this effect it is necessary to add some small impedance (but large compared with the few milliohms of lead resistance involved) into the earth loop in such a way as not to accentuate the even-harmonic distortion. Such a place is within the main feedback loop of the power amplifier where no large voltage amplifications take place. Fig. 14 shows the final power amplifier circuit. Although this causes a slight increase in overall distortion on mono signals the improvement on stereo signals is impressive. (A far more costly but admittedly more elegant method would be to use two independent power packs).

The original design described two versions:

- Version 1—40 volt supply—10 watts in 15 ohm load
- Version 2—24 volt supply—10 watts in 3 ohm load or 3½ watts in 15 ohm load

TABLE II—COMPONENT VALUES FOR FIG. 14

R1	330kΩ	Note A	R10	560Ω	1 watt, wirewound
R2	56kΩ		R11	150Ω	
R3	68kΩ	2% high stability	R12	10Ω	2% high stability
R4	22kΩ		R13	150Ω	
R5	220Ω	Note B	R14	1Ω	10%
R6	33Ω		R15	1Ω	
R7	1kΩ		R16	3.9kΩ	
R8	4.7kΩ		R17	1kΩ	
R9	22Ω		R18	10Ω	

All resistors ¼ watt and 5% unless otherwise stated.

C1	50μF	25V.wkg.electrolytic	C5	200μF	6V. wkg. electrolytic
C2	10μF	15V.wkg.electrolytic	C6	25μF	50V. wkg. electrolytic
C3	200μF	6V.wkg. electrolytic	C7	1,000μF	50V.wkg. electrolytic
C4	1,000pF		C8	1,000μF	50V. wkg. electrolytic
D1	OA5				

Note A. Adjust for collector of Vt6 to sit at half supply volts ± 1 volt.  
 Note B. Adjust for output stage quiescent current (measured as difference in supply current when R<sub>9</sub> is shorted out) to be 15mA ± 5mA.

In view of the large currents flowing in the version 2 design, and the difficulty in avoiding earthing problems, version 1 is to be preferred although the lower voltage design will give very satisfactory results at lower power levels. All the component values and performance figures mentioned here refer to version 1. The circuit diagram of the 40V power supply is given in Fig. 15.

Certain minor alterations have been made to the component values in the light of further knowledge of component tolerances, and to improve the bass response. The quiescent current in the output stage (measured as the variation in supply current which occurs when Vt3 and Vt4 bases are shorted together) should be between 10 and 20 mA, R<sub>9</sub> being altered if necessary to obtain this value. Similarly the output sitting-point may be set up by altering R<sub>1</sub>. It is important to mount the thermal stabilizing diode D1 on the same heat sink and in close proximity to the output transistors.

### Acknowledgements

The author gratefully acknowledges the work of R. Tobey who designed the basic circuit of the improved

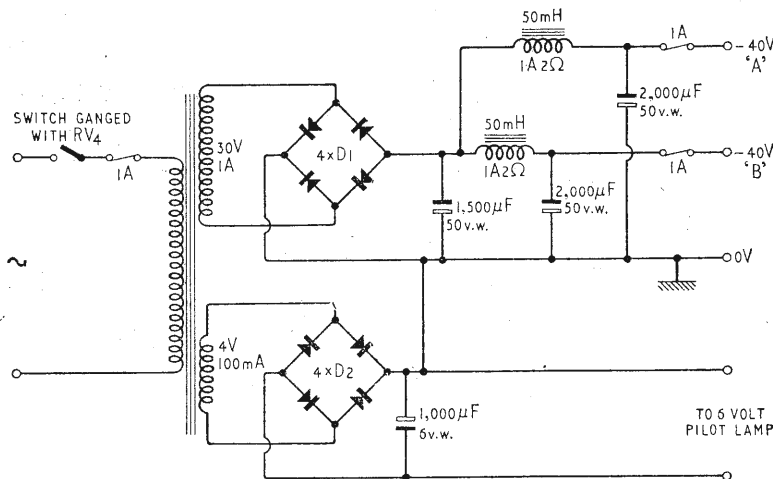


Fig. 15. Circuit of 40-V power supply.

pre-amplifier and offered valuable comments and criticism during the development. He is also indebted to P. Lepine for carrying out the experimental work in optimizing and plotting the response curves.

[To be concluded. Full dimensioned drawings of metal-work, printed circuit and wiring diagrams will appear in the next issue together with hints on construction.]


### REFERENCES

- <sup>1</sup> R. Tobey and J. Dinsdale: "Transistor Audio Power Amplifier." *Wireless World*, November 1961.
- <sup>2</sup> R. Tobey and J. Dinsdale: "Transistor High Fidelity Pre-Amplifier." *Wireless World*, December 1961.

### APPENDIX

$$i_L = \frac{(e_H - e_V)}{|Z_H + Z_V + R|} \quad \text{and similarly } i_R$$

$$E_L = (e_H - e_V) - i_L |Z_V + Z_H| + i_R |Z_H| \quad \text{and similarly } E_R$$

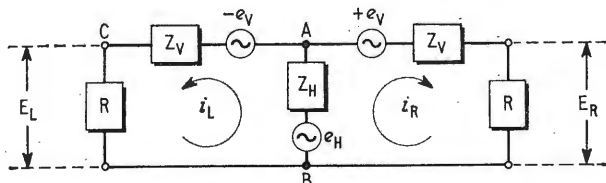

R = INPUT IMPEDANCE OF AMPLIFIER

E = APPLIED SIGNAL FROM PICKUP

The channel separation is given by

$$\frac{(e_H - e_V)}{|Z_H + Z_V + R|} \cdot Z_H$$

$$(e_H - e_V) - \left( \frac{(e_H - e_V)}{|Z_H + Z_V + R|} \right) (|Z_V + Z_H|)$$

$$= \frac{|Z_H|}{|Z_H + Z_V + R|}$$

$$= \frac{|Z_H|}{1 - \frac{|Z_H + Z_V|}{|Z_H + Z_V + R|}}$$

$$= \frac{|Z_H|}{|Z_H + Z_V + R| - |Z_V + Z_H|}$$

Where R is large, the effects of  $Z_V$  and  $Z_H$  are negligible. However where R is of the same order as  $|Z_H + Z_V|$ , about 2 to 12K, the channel separation will be seriously degraded; and since  $Z_H$  and  $Z_V$  are frequency-dependent, this effect will worsen with increasing frequency.

In addition, the lateral/vertical sensitivity will depart from the ideal ratio of 1 (an effect pointed out by Mr. D. G. Jaquess). The effective lateral sensitivity measured between points A and B will be  $(e_H - 2i_L |Z_H|)$  because both currents flow in  $Z_H$ , while the effective vertical sensitivity measured between points A and C will be

$$(e_V - i_L |Z_V|). \quad \text{Thus the ratio } \left( \frac{e_H - 2i_L |Z_H|}{e_V - i_L |Z_V|} \right)$$

will be dependent on both frequency and current and hence on loading.


Measurements taken on the Decca "ffss" Mk. II pickup tend to support this theory, but there are other factors involved, such as the mutual coupling mentioned earlier.

## CATHEDRAL SOUND

MANY of the beautiful architectural features of the new Coventry Cathedral—the high absorbent roof canopy, the tapestry at one end of the nave and the highly reflecting engraved glass curtain window at the other—have presented unique problems for the acoustic consultants who have been called in to provide electroacoustic reinforcement, so that all members of the large congregations can hear well. Sound projected longitudinally down the aisle, even when suitably delayed to compensate for time lags in propagation, has failed to remove confusion of sound because it is overlaid by the strong return from the end window.

A new system, designed by F. H. Brittain and his colleagues at the Hirst Research Centre of the General Electric Company Ltd., relies on a single group of loudspeakers high in the roof and has satisfactorily solved the problem. The sound is directed principally toward the back of the nave where the requisite delay (about 60 millisecc) is obtained simply by the increased height of the source. If the sound level is correctly adjusted one is not conscious that the sound is coming downwards, but the steep angle ensures that reflections from the floor of the aisle and from the back window are returned upwards instead of longitudinally over the congregation, and are soon lost in the absorbent roof canopy. The directional properties of the loudspeaker array are such that in the front rows there is negligible reinforcement (delayed) to interfere with direct hearing of the preacher's voice.

There are 27 microphone positions, controlled from a console with mixing facilities at the back of the nave. Audio power is supplied by two 50 watt amplifiers, but for normal speech only about 7 watts is, in fact, required.

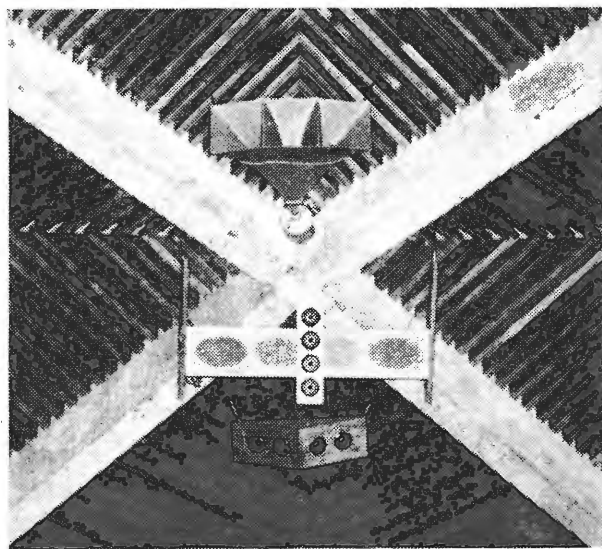

The loudspeaker group consists of two short column arrays, a medium-frequency 3-cell horn and two pairs of h.f. units to improve articulation in the front corners of the nave.

A major problem for the electronics industry is the real shortage of people with the right practical qualifications for research, laboratory or development work, for production control and kindred activities. In particular, people capable of operating the wide range of standard instruments to be found nowadays in most electronic laboratories are hard to come by.

"Wireless World" recognizes that a real need exists in this field for an integrated, up-to-date, informative set of articles on the practical aspects of laboratory instruments. It has therefore commissioned Mr. T. D. Towers to write a series entitled "Electronic Laboratory Instrument Practice," starting in this issue. Mr. Towers is already well known to our readers for his series of articles on "The Elements of Transistor Pulse Circuits" which ap-

peared throughout 1964, and for his "Transistor Television Receivers" (Iliffe Books Ltd.).

The material in the new series is carefully selected to form a comprehensive well-organized course. Basically it will give clear detailed information about the commonplace instruments of the electronic laboratory. Much has been written on this subject in the past, but few surveys covering the range of basic test equipment furnish also practical instruction in their methods of use.

When you work in an electronics laboratory, you come in time to use all the measurement instruments almost subconsciously. But when you first join such a laboratory, you find the array of meters, signal generators, oscilloscopes, bridges, etc. quite frightening. Even though you have been through a course in laboratory instrument practice at a University,

# ELECTRONIC LABORATORY INSTRUMENT

By T. D. TOWERS,\* M.B.E., A.M.I.E.E., A.M.I.E.R.E.

**E**LECTRONIC instruments have been in general use for about half a century, but it was only the technical impact of the Second World War that brought such precision measuring equipment on to every lab. bench. Also the scope of measurement has widened greatly and nowadays measurements of frequencies up to hundreds of megacycles, currents down to fractions of a millimicroamp and voltages down to fractions of a millivolt are commonplace.

A series of articles like this can cover only the broader aspects of electronic instrumentation. A whole library of text-books would be required to cover details. My aim is mainly to show the newcomer what sort of instrument he would normally use to measure what, and to offer practical advice on the use and care of these instruments. The discussion will not be limited to the enticing array of new instruments offered by the manufacturers from time to time. The series must be retrospective too, because most people reading the articles will be "stuck with what they have got," and, most laboratories usually end up with "something old, something new, something borrowed and" . . . an intense wish that they had something else!

Transistors have been much used in recent instrument models and have brought the usual semiconductor advantages of smaller size, greater robustness and longer life. But transistorization has brought a new problem. The spate of redesigned transistorized models is so persistent that you will find difficulty trying to keep up with them.

Instrument presentation, too, has been changing rapidly. In the old days, you could walk into a laboratory and, if you had a little experience, you could identify every piece of equipment on sight. Nowadays it has become in-

creasingly difficult to work out what an instrument is by merely looking at its front panel. One of my objects is to familiarize you with the general appearance of the instruments in common use. Take Fig. 1, which is an illustration of a corner of my private laboratory. If you are an experienced electronics man, you will be able to identify the instruments in the picture fairly correctly. If you are a newcomer, you may be puzzled by some of the "prehistoric" models I continue to use because I "like the feel of them." The large instrument on the extreme right, for example, is an ancient r.f. generator. I keep using this because it has an excellent attenuator, which (despite its age) is better than many fitted in present-day instruments.

## Instrument Types

You can divide electronic lab. instruments into three main classes:—

1. *General-purpose*: instruments in almost daily use in every electronics laboratory.
2. *Special-purpose*: instruments in daily use in laboratories specializing in a particular field but not in the general run of laboratories.
3. *Esoteric*: instruments only occasionally required for extra special measurements.

In the general-purpose class, can be listed seven basic instruments: (1) multimeter, (2) d.c. power supply, (3) a.f. generator, (4) r.f. generator, (5) oscilloscope, (6) valve voltmeter, (7) transistor (or valve) tester.

Fig. 2 shows a typical set of these basic instruments in use in the Applications Laboratory at Newmarket Transistors Ltd. at the time of writing. Most of them are standard commercial equipments.

Besides these basic instruments, most laboratories use

\* Newmarket Transistors Ltd.

technical college, or school, you will find that practising engineers use techniques and "short-cuts" which never seem to get reflected in text-books.

If you are going in for electronic work in a professional (or even serious amateur) capacity, you should find the series rewarding, as it is aimed primarily at the "new recruit". It should be particularly useful to those who have obtained all the necessary paper qualifications like O.N.C., H.N.C., or B.Sc., and find themselves projected into the disquieting turmoil of a commercial electronic laboratory to "find their own feet".

But the series is not for the beginner only. It will also make useful reference material for practising engineers who have reached positions where they are "away from the bench" and thus unable by personal experience to keep up with the changing field of laboratory instrumentation.

The author will try to instil into the series the true atmosphere of the working laboratory. The aim is to keep the text at a level which will be most appreciated by the student and experimenter who is ever seeking to extend his knowledge. While essentially a practical guide written with emphasis on applications and testing methods, the articles will also consider basic design and circuit features where necessary to appreciate the full scope and diversity of instruments—and their limitations.

As the Chief Applications and Measurements Engineer of Newmarket Transistors Ltd., the author runs a large modern electronics laboratory with a wide sphere of activity. Through this and his own private laboratory, he has a specialized practical knowledge of modern electronic laboratory practice which assures the reader of an authoritative practical treatment of the subject.

# PRACTICE

## 1.—INSTRUMENT REQUIREMENTS


*special-purpose* instruments related to their particular interests. Typical of these are admittance bridges, v.h.f. millivoltmeters, distortion meters, wide-band oscilloscopes, and pulse generators. A small selection of typical special-purpose units in use at Newmarket is shown in Fig. 3.

Apart from general and special-purpose instruments,

anyone who works in a lab. will occasionally come across *esoteric* instruments used to carry out very specialized measurements. In this class are things like spectrophotometers, ion gauges, scintillation counters, and intermodulation test sets. Fig. 4 gives a typical example—a transistorized crystal-controlled clock with digital readout facilities. The general use of this sort of thing is so infrequent that many engineers can go through life without ever handling one.

Many things control the selection of instruments in these three classes. Not the least is cost, and sensibly you should look at this as an accountant would. Work out the cost of writing off the capital value of a piece of equipment, together with its maintenance costs, and decide whether it is more economical in end cost (i.e., counting engineer time, etc.), to buy commercially or

Fig. 1. Corner of Author's private laboratory with typical instruments:—1, D.C. power supply; 2, Valve, voltmeter; 3, Oscilloscope; 4, Multimeter; 5, Audio generator; 6, Transistor tester; 7, R.F. signal generator.

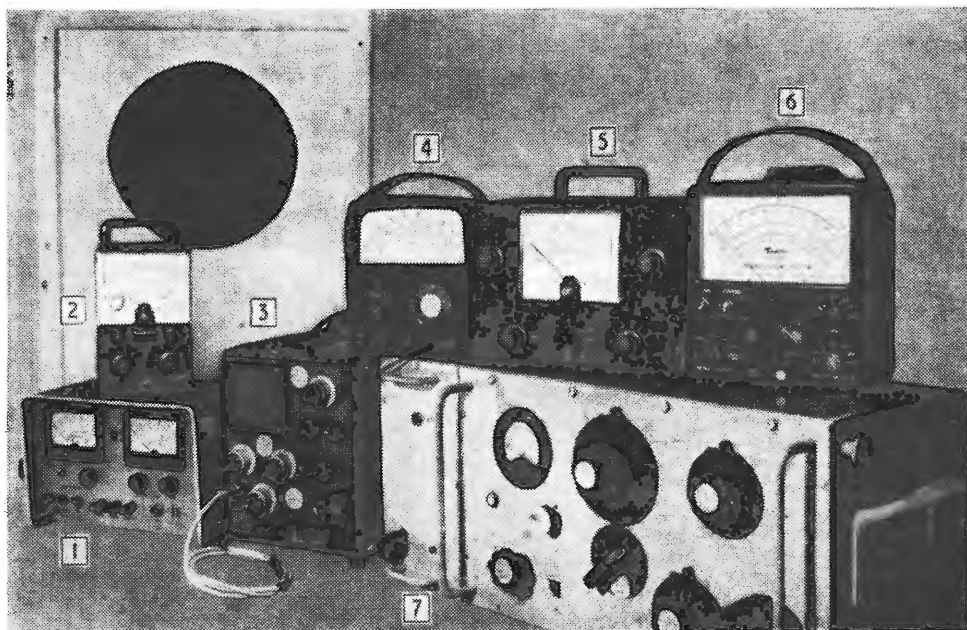

make do with a lab. "lash up." This simple rule will prevent the accumulation of white elephants, a failing of many laboratories. Of course there is always the difficulty that commercial equipment may not be available. In the forefront of the transistor business particularly, where new parameters keep appearing, I find you have to keep designing and building your own. But for the average engineer in electronics this situation does not arise.

Commercial literature often emphasizes the versatility of equipment, but this can be a snare. Always remember that an instrument, however versatile, can only be in one place at one time. Accessories too, should be approached with caution. Provided a good basic instrument is available, it is surprising how little use need be made of the accessories offered with it. Always spend money on the basic instrument rather than on the accessories.

One set of accessories on which it is worthwhile spending money, however, is in equipment mounting. With lab. floor space at such a premium, there is much to be said for mounting instruments (particularly those not too frequently used) on standard 19in Post Office racks. Also any large oscilloscope ought to be mounted on a trolley, as it is so liable to be damaged by being passed about by hand from one engineer position to another.

### Instrument Procurement

Where you are faced with a problem of getting a new instrument you can buy new, buy second-hand, build yourself, or (a recent development) hire. This last facility is particularly good for "one off" projects.

The advertisement columns of the electronics journals such as the *Wireless World* give full details of new equipment, and instrument suppliers are always pleased to send you leaflets. Second-hand equipment is more difficult and for the beginner probably the best advice is "don't." New equipment can also be obtained pre-assembled from the do-it-yourself kit manufacturers. Many laboratories buy in kit form and assemble themselves, using the exer-

cise for training juniors at the same time. Because of all this, many labs. display a curious miscellany of makers. There are, however, advantages in getting your equipment as far as possible from one maker. Unless you are a real instrumentation expert, always go to a standard instrument manufacturer, and pay the price he asks. You will get value for your money. You may be surprised at how apparently expensive the equipments of reputable manufacturers can be, but you should recognize that in a properly equipped lab. the electronic instrument capital investment per bench engineer can run to something approaching his annual salary.

### Instrument Care

Always look to the safety of your instruments. Treat h.t. voltages with respect. If you do have to open up an instrument (such as an oscilloscope) with dangerously high voltages, be extra careful. Remember the old engineers' rule (always repeated by *living* grey-haired experts) "When you are messing about with high or unknown voltages, keep one hand in your trouser pocket, look down to see that the floor you are standing on isn't a good conductor, and move wires, etc., with the back of your fingers, so that if you *do* get a shock and involuntarily contract your hand the contact is broken."

Instruments are expensive. Despite manufacturers' claims of ruggedness (particularly in this transistor era) always treat an electronic instrument as if it were a cup of tea brimming to overflowing. Always see that it is regularly serviced and calibrated. Try to keep a log book for each instrument, and, if this is impossible, at least tie on to the handle a label on which its history is recorded. If for your own purposes you bring out 1,000 V to a front terminal, which normally has only 10 V on it according to the hieroglyphics on the panel, see that a temporary label is tied on.

Before you use an instrument you are not familiar with, check the earthing, fusing, and the mains voltage tappings. Remember that American equipment is de-


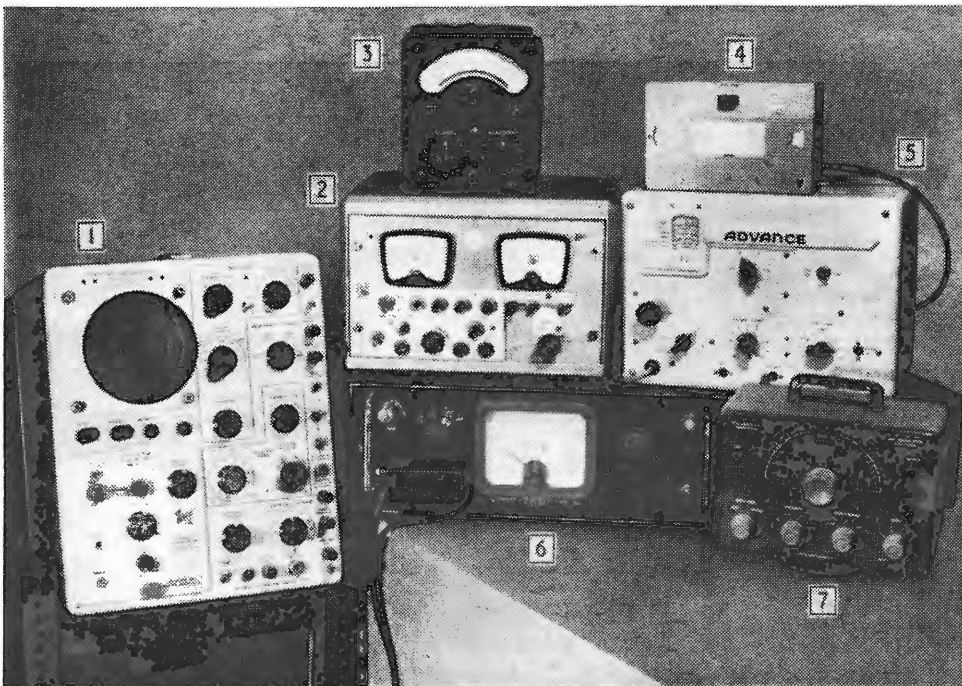


Fig. 2. Seven essential laboratory general purpose instruments (examples in use at Newmarket, Transistors):—1, Oscilloscope; 2, Power supply; 3, Multi-meter; 4, Transistor tester; 5, R.F. Signal generator; 6, Valve voltmeter; 7, Audio generator.



Fig. 3, Special-purpose instrument selection:—1, Pulse generator; 2, R.F. admittance bridge; 3, Total distortion meter; 4, V.H.F. millivoltmeter.

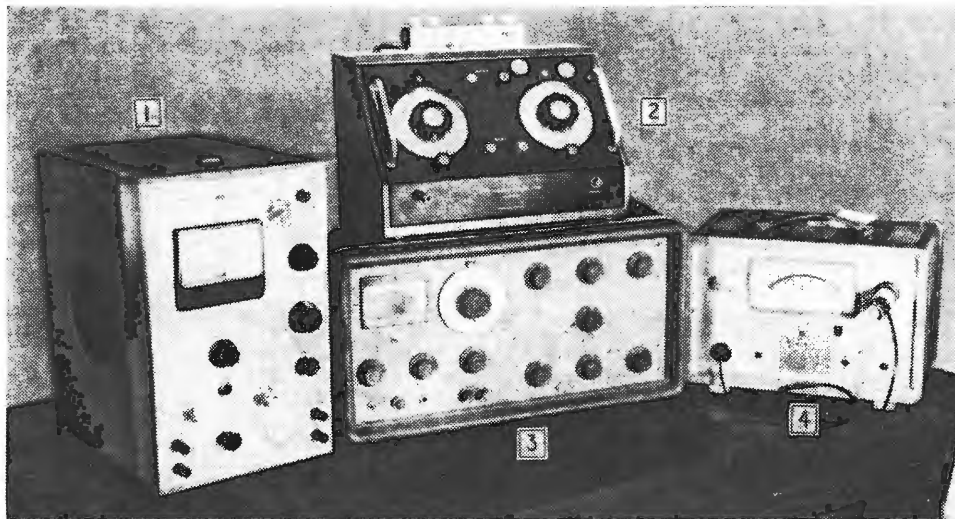

signed to work on 110-120 V, 60 c/s, a.c. and British (normally 230-250 V 50 c/s. When you are using a scope, never leave the beam focused on a single spot, as this may burn the tube and leave a dark mark. When you are using very sensitive meters, always short the input terminals when you have finished. The simplest way is to take a piece of rosin-cored solder and wind it round the two terminals; you can snap the excess solder off without a pair of cutting pliers. Finally, do not, as so many engineers do, use the multimeter cut-out as a circuit protection. The voltmeter is provided with a cut-out to protect itself and not the equipment you are working on. Too frequent overloading of the cut-out can seriously mar the accuracy of the multimeter.

### Instrument Accuracy

When you first start to use electronic instruments, you tend not to question their accuracy. I have found that the average electronic engineer has a surprising faith in the accuracy of his instruments. Time and again I find myself saying "How accurate are these figures?"

Fig. 4. Esoteric instrument example:—Electronic unit of microbalance with combined analogue-digital readout (courtesy Cambridge Consultants).



I then launch into a more precise question. "What is the probable error and what is the maximum possible error?" I then find that I am wandering off into a disquisition on the mathematical theory of errors, so I reduce the matter to a simple challenge . . . "Will you give me a shilling (or ten shillings depending on the importance of the point) for every figure that I can prove to you is more than, say 10% wrong?" Over the years I have found that engineers divide into two distinct categories: those whose results I would usually accept without checking because, nine times out of ten, I find that I would be wasting my time doing so; and those results I am loath to accept without some form of cross-check.

It seems to be a matter of basic intelligence. The good engineer is a scientist at heart and recognizes that an electronic test instrument is only a tool. Take a clock. Just because the hands point to 4 o'clock, you don't assume that it shows the correct time. You normally assess the error, probably sub-consciously, by, say, looking out the window at the state of the light. You should do the same with lab. instruments. Always mentally assess the probable error in what you are recording. Until you get the feel of things and acquire the ability to cross-check readily, you should be over-cautious. Your motto could well be, parodying Descartes, "Dubito, ergo sum," i.e. take nothing for granted.

Now, you read an instrument by looking at a pointer on a scale, a setting of a dial, a figure in a digital readout, and so on. There are really two problems here. First, you must consider how *precisely* you can make the reading that the instrument shows. Second, you must decide how *accurately* what the instrument shows represents the quantity being measured (however precisely you make your actual reading of the display).

With a digital readout, under most circumstances, the precision of the reading is exact because the value appearing is a whole number. With analogue type instruments such as meters, the precision depends on such things as the angle at which you look at the needle or the scale against which you are reading it. A good guide is never to try to read more closely than to the smallest printed scale division. This works on the assumption that the instrument manufacturer prints his scale sensibly . . . as he usually does. This problem of reading precision is illustrated in the voltmeter scale of

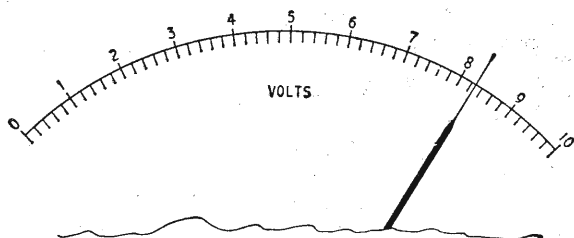


Fig. 5. Meter scale illustrating method of rounding off readings.

Fig. 5. Here a wise man would read 8.2V only and not attempt to interpolate within the smallest scale division. In this matter of "rounding off," be consistent. I always round off to the nearest scale line, and, when the needle falls halfway between two lines, round off to the nearest *even* scale number (B.S. 1957:1953). Where you record rounded off numbers like this, carry your decimal place only to the actual number rounded off. In the case above, the reading should be recorded at 8.2 V and not 8.20 V.

While you must always consider the question of the precision of your readings, their accuracy is a much more difficult and important problem. There are two aspects of this. One is how closely the instrument displays the real value of what it measures. The other is how much the instrument upsets the circuit it measures, i.e. how far it fails to measure accurately because it changes the quantity being measured.

We recognize that an instrument must display a reading different from the actual quantity applied to its terminals. The important question is how different. This depends on two things. First, how accurately the instrument reads by its intrinsic design, i.e. even if the instrument is new and freshly calibrated it will have an intrinsic possible error. Take the case of a good general purpose multimeter. When it is new, the reading of a quantity in any scale can be out by up to  $\pm 2$  or 3 % of full scale deflection. Very soon, with normal laboratory manipulation, it can become materially worse than this. Experienced engineers know the expected theoretical accuracy of an instrument and, as a precaution, mentally double this possible error if they cannot check before they have to use it.

In meter-type instruments, you should remember that the accuracy is specified as a percentage of the full-scale deflection. Specifications are not always clear, but usually for an instrument specified as of 2% accuracy the full-scale deflection reading can be in error  $\pm 2\%$ . Remember also, that this error remains fixed in absolute value across the scale, so that if you attempt to measure a quantity at a tenth of the full scale deflection, the possible error of the reading can still be  $\pm 2\%$  of the full scale value, i.e.,  $\pm 20\%$  at the low value. This is, of course, why most good multi-scale instruments have overlapping scales, so that you can read any quantity without having to go below about one-third of full scale deflection. This is also why you will often hear the advice: "Try to keep the meter needle up."

Never forget that when you put a measuring instrument on a circuit, you change the quantity you are measuring, so that even with a perfectly precise, perfectly accurate instrument the value you read will not be the true value in the absence of the instrument. The important thing is to be able to judge how much you have modified the quantity measured. This point will be

covered in later articles in some detail, since the increasing use of silicon transistors operated at very low currents has meant that the effective loading of instruments on circuits is becoming a major problem. A simple rule that I follow is to assume that if the current being measured is more than a hundred times the full-scale deflection (f.s.d.) current, the instrument has a negligible effect on the parameter being measured.

To ensure the maximum possible accuracy when using instruments, always use standard good measurement practice by seeing that the instruments are properly earthed, properly screened (where necessary), and set to the proper range. Also, always see that adequate time is allowed for an instrument using valves to heat up and "settle down."

Always try, if only mentally, to cross-check your reading in some way. This may be merely the simple process of stopping and thinking, "Does this value make sense? Is it in accordance with what I would expect from my experience in the field?" Always try to look past the figures to the actual value itself. Apart from this, always try to assess the accuracy of the instrument you are using. Look at the label to see when it was last calibrated and, where the question of accuracy is important, check the instrument against a standard, or have it calibrated.

## Laboratory Calibration Standards

By now you should begin to see why every lab. should have something to check the instruments against, i.e., some standards. Instruments are obviously of little useful value unless they are checked regularly. In later articles I will discuss the question of standards more fully, but at this juncture it is worth pointing out that for calibration you should use a standard with an accuracy greater than you want from your calibrated instrument. Standards are of two general types, "primary" and "secondary." Primary standards are of a very high accuracy. Normally this means an error of less than  $\pm 0.05\%$  as compared with the absolute reference standards maintained by one of the central institutions. These sort of standards are usually maintained only by instrument manufacturers. Most standards used in ordinary laboratories are secondary ones, which compare with the absolute standard to about  $\pm(0.1-0.5\%)$ . In calibrating an instrument of, say, 1% accuracy, the standard should, if possible, be better than 0.1%, i.e., ten times more accurate.

The standards ideally required in a laboratory are: (a) potentiometer test set, (b) self-contained power source, (c) standard resistance, (d) standard inductance, (e) standard capacitance, (f) standard frequency, (g) standard timebase. Although ideally a lab. should have all these standards, precise voltage and current sources are the most important.

## Reference Material

So far it has been largely a matter of "setting the picture" on lab. instrumentation. Later articles will fill out some details, but the field is so large that the engineer will want to look to other sources of information. In this respect, anyone who works with electronic instruments should keep at hand standard reference material for guidance. Even in the author's modest laboratory, the array of reference books pictured in Fig. 6 is in constant use.

A wide range of text-books is available, and some

guidance is not out of place on this. The more commonly used text-books relating to laboratory electronic instrumentation to be found around lab. benches are listed below in alphabetical author order. Each of these contains valuable reference material, much of it most practical, and are worth looking at even if you don't want to buy them.

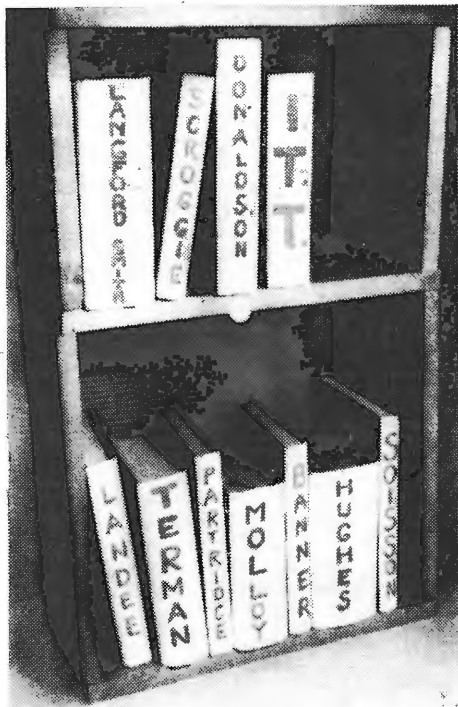


Fig. 6. Standard reference books in common use by the author in the field of instrumentation.

Of all these titles I have found over the years four volumes which I think no laboratory should be without—"Langford-Smith", "Scroggie", "Donaldson" and "I.T.T."

In the matter of reference material the service manuals

Author	Book	Publisher
Banner, E. H. W.	Electronic Measuring Instruments	Chapman & Hall
Donaldson, P. E. K.	Electronic Apparatus for Biological Research	Butterworth
Hague, B. K.	A.C. Bridge Methods	Pitman
Harris, F. K.	Electrical Measurements	Wiley
Hartshorn, L.	Radio Frequency Measurements by Bridge and Resonance	Chapman & Hall
Hughes, L. E. C.	Electronic Engineers Reference Book	Heywood
I.T.T.	Reference Data for Radio Engineers	International Telephone & Telegraph
Landee, R. W. et al.	Electronic Designer's Handbook	McGraw Hill
Langford-Smith, F.	Radio Designer's Handbook	Iliffe
Lion, E. N.	Instrumentation in Scientific Research	McGraw Hill
Partridge, G. R.	Electronic Instruments and Instrumentation	Pitman
Prensky, S.	Electronic Instrumentation	Prentice Hall
Risse, J. A.	Electronic Test Instrument Handbook	Howard Sams
Scroggie, M. G.	Radio and Electronic Laboratory Handbook	Iliffe
Soisson, H. E.	Electronic Measuring Instruments	McGraw Hill
Terman F. E. & J. M. Pettit	Electronic Measurements	McGraw Hill
Turner, R. P.	Basic Electronic Test Instruments	Holt, Rinehart & Winston
Turner, R. P.	Basic Electronic Test Procedures	Holt Rinehart & Winston

or instrument handbooks for all the lab. instruments in use should be carefully preserved. A record of any historical features, such as design modifications carried out that can affect the accuracy of the instruments, should be pasted into these.

No laboratory can do without transistor and valve manuals. I have always found the *Wireless World* Radio Valve Data to cover the British market for these devices well. For American and European transistors, however, the most useful reference is "DATA" published by Derivation and Tabulation Associates, 43 South Day Street, Orange, New Jersey.

## Conclusion

In this preliminary survey, I have tried to pick out some of the general points that are important in practice; but one should not be "blinded by science." You should, of course, always get hold of the best instruments you can afford and *need*. But do not think that an impressive array of exotic test equipment by itself will ensure good work. A curious thing is that constructive work seems to come more readily out of laboratories where the electronic test equipment looks a bit seedy, and is not always the most expensive or newest available. Where a lab. is neat and tidy and has a glittering orderly array of test instruments, my experience has been that the place tends to be sterile, and the quantity and quality of the work output from it is generally poor. This is an old story. You can look at a man's bookshelves and judge by the appearance of the bindings whether the owner really uses them or not. A few well thumbed tomes speak volumes.

## CLUB NEWS

**BRADFORD.**—An informal meeting between the members of the Bradford, Spen Valley and Leeds radio societies will be held at 7.30 on January 5th at Cambridge House, 66, Little Horton Lane, Bradford 5.

**EAST HAM.**—Short-wave listeners and licensed amateurs living on the east side of London are invited to the fortnightly meetings of the East Ham Group of the Radio Society of Great Britain. These are held on alternate Tuesdays at 7.30 at the home of A. A. Leith (G2COG), 12 Leigh Road, London, E.6. Further information from the secretary, D. R. Durham, G3SIR, 43 Victoria Avenue, E.6.

**HALIFAX.**—At the January 5th meeting of the Northern Heights Amateur Radio Society A. W. Walmsley (G3ADQ) will discuss s.s.b. trends. Fortnightly meetings are held at 7.30 at the Sportsman Inn, Ogdon.

**HECKMONDWIKE.**—At the meeting of the Spen Valley Amateur Radio Society on January 21st, L. M. Dougherty will talk on aerials for radio astronomy. Fortnightly meetings are held at 7.30 at the Grammar School, High Street.

**LEICESTER.**—"Parametric amplifiers in the v.h.f./u.h.f. bands" is the title of the lecture to be given by C. L. Wright (G3CCA) at the January meeting of the Leicester Radio Society which meets in the Engineering Dept. of the University.

**MELTON MOWBRAY.**—"Flat line equipment for 23cm" is the title of the talk to be given by J. L. Warrington (G2FNW) at the meeting of the Melton Mowbray Amateur Radio Society on January 28th. Monthly meetings are held at 7.30 at St. John Ambulance Hall, Asfordby Hill.

**WELLINGBOROUGH.**—January meetings of the Wellingborough Radio Club, which meets at 7.45 every Thursday at the Silver Street Club Room, include a talk on home-made gadgets by P. Elderkin (14th) and one on transistors by G. Abrams (28th).

# RECENT TECHNICAL DEVELOPMENTS

## Automatic Degaussing for Colour Television

Demagnetization of the shadow mask and associated ferrous material in a colour television receiver (degaussing) is necessary when a receiver is installed or reorientated in order that the electron beams remain in alignment. Degaussing is achieved by tracing a helix in front of the receiver and away from the tube screen with a coil energized with 50 c/s a.c.

R.C.A. have now incorporated an automatic degaussing feature in their receivers (N.T.S.C.) which removes colour impurity due to magnetization. A purity shield surrounding the tube is used as the pole pieces for four degaussing coils using the usual 50 c/s a.c. By use of voltage dependent resistors and negative temperature coefficient resistors the circuit is arranged such that each time the receiver is switched on demagnetization occurs, the effect decaying during the warming-up period to negligible proportions when the receiver is ready for viewing. Purity magnets which are used for alignment of the three electron beams are to the rear of the receiver and consequently unaffected.

## Thin Films

The work of the Electronics Department of the Electrical Research Association at Leatherhead, Surrey, is at present largely concerned with thin film techniques, and some interesting results are being obtained. Electron microscopic examination of gold films deposited on dielectric substrates shows a surprising lack of continuity. Indeed, it is difficult to find continuous paths through the assembly of discreet aggregates into which the metal film is divided, rather resembling a crackle enamel finish in appearance. The cracks are due to the forces of cohesion in the metal being greater than the forces of adhesion within the substrate. Nevertheless, the film as a whole shows better conductivity than the geometry of the fissures would suggest and investigations of the film/substrate system as a whole point to two possible mechanisms for the anomalous conductivity—electron scattering at the film boundaries in a process analogous to tunnelling and initial conductivity in the substrate, particularly when this is a polar dielectric like glass.

Other work in this field being undertaken by E.R.A. is directed to discover

the effect of the presence of impurity gases on the dielectric properties of the silicon monoxide films widely used in microcircuits, and also the feasibility of depositing circuit elements and interconnections by writing with a beam of positive metal ions. Deposition of metal from ion beams has hitherto been bedevilled by dilution with neutral atoms and by other factors which prevent efficient collimation and the production of a small spot size. Present work is directed at the improvement of vacuum arc sources of copper ions.

## Electronic Stop and Coupler Actions for Pipe Organs

It has in the past been customary to effect the coupling of the pipes to form "stops" in conventional pipe organs by means of mechanical "tracker" mechanisms or a multiplicity of relay contacts in organs with electric actions.

The advent of semiconductor logic switching has opened up the possibility of more silent and reliable action and the appropriate circuitry is discussed by A. K. Cabrera in *A.W.A. Technical Journal*, Vol. 13, No. 1 (Sept. 1964).


Each manual in a pipe organ has a number of stops associated with it. These stops operate ranks distinguished by their tone colour (e.g., diapason, flute) and for each note there are a number of pipes, each rank having one of these pipes as a member. It is evident that

before a note or pipe can sound a key must be depressed AND a stop pulled. In addition to these "speaking" stops, there are a number of stops coupling manuals which allow a note to be played on say the Swell manual and the corresponding note to play on say the Great manual. In other words, a given note on the Great manual will sound if that note is played OR if the corresponding note is played on the Swell manual AND the Great to Swell coupler stop is drawn, OR, etc.

To complicate matters, the extension principle is used (in order to reduce the total number of pipes). Given a basic Swell rank notes may be borrowed by the Great Manual or the Pedal organ and other ranks can be simulated.

A typical logic diagram for one note on the Swell manual of a small organ is shown in Fig. 1.

In electromagnetic pipe organs relays are used to perform the logic functions and considerable saving in cost can be achieved by using diodes and in addition we have their greater reliability and faster action. Due to the power requirements of the electromagnets operating the note valves, for example 12 V at 150 mA, use of the diode logic will cause high dissipation in some resistors and consequently transistor logic is an obvious advantage. A simple two manual organ with about 250 pipes may require about 600 transistors and resistors and 250 diodes in a typical arrangement.

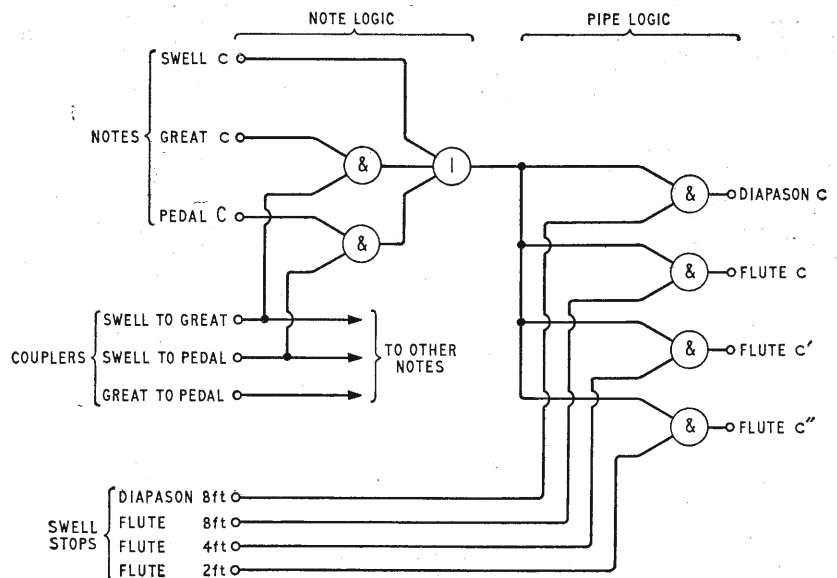

# OSCAR III

By W. H. ALLEN,\* M.B.E., G2UJ

## ORBITING SATELLITE CARRYING AMATEUR RADIO

THE third of the Oscar series of satellites is now undergoing final ground tests in the United States in preparation for launching later this winter, the actual date depending upon the availability of space in a suitable American research rocket vehicle.

Unlike Oscars I and II, transmission from which consisted of the morse letters "HI" sent continuously on a frequency of 145 Mc/s with a radiated power of 100 mW, Oscar III will be a translator satellite capable of receiving signals over a 50 kc/s portion of the "two metre" amateur band centred on 144.1 Mc/s, changing their frequency without demodulation, and reradiating them on another 50 kc/s segment of the band centred on 145.9 Mc/s. The actual frequency limits will thus be:

Receiving 144.075 to 144.125 Mc/s.

Transmitting 145.925 to 145.875 Mc/s.

It will be appreciated that in the process of translation, frequency inversion will take place, a station operating on, say, 144.075 Mc/s being retransmitted on 145.925 Mc/s. Thus, with a single-sideband transmission in which the upper sideband is transmitted by the ground station, it will appear as the lower sideband when received from the satellite.

All forms of modulation including c.w., narrow band f.m., a.m. or p.m. telephony and teleprinter may be employed.

A modification of the frequency limits, both for acquisition by Oscar III and for reception of the translated signal by a ground station, may be caused by Doppler shift due to the speed of the satellite relative to the transmitting and receiving stations concerned. A maximum frequency shift of 8 kc/s is anticipated when the track of the satellite passes immediately above the receiving station and must be allowed for when tuning over the translated band of signals.

The average output power of the main transmitter in the satellite will be one watt, and automatic gain control in the receiver section will ensure that this is not exceeded by even the loudest incoming signal. It will be imperative, therefore, that amateurs attempting to make contacts via the satellite restrict their power to such a level that this a.g.c. is not brought into operation, otherwise a reduction in the strength of all other signals being handled by Oscar III at that time would occur.

Two further transmitters will be carried, one a beacon radiating a continuous unmodulated 100 mW carrier on 145.950 Mc/s for tracking purposes and the measurement of Doppler shift, and the other, on 145.850 Mc/s, for telemetry. This will take the form of the morse letters "HI," the speed of sending varying according to the information being transmitted, together with variable width pulses between the Morse characters to convey the state of the power supply.

### Receiver and Aerial Recommendations

For reception of signals from Oscar III a combination of a crystal-controlled converter feeding into a communication receiver which provides the variable first i.f., as generally favoured by operators on the 144 to 146 Mc/s amateur band, is to be recommended, and as all transmissions from the satellite including the beacon and telemetry frequencies will occupy a band only 100 kc/s wide, some means of frequency measurement is highly desirable. An ideal arrangement would be a frequency marker consisting of a 1 Mc/s crystal oscillator checked against the standard frequency transmissions from MSF or 5 or 10 Mc/s, locking a 100 kc/s multi-vibrator and harmonic generator giving an output between

145 and 146 Mc/s. A word of warning is appropriate, however, as it is all too easy for the crystal and multivibrator harmonics to find their way directly into the tunable first i.f. and not come from the v.h.f. section of the receiver at all. An alternative arrangement available to listeners within 50 miles or so of London, would be to locate the Radio Society of Great Britain's beacon transmitter, GB3VHF, situated at Wrotham, Kent, and radiating on 144.5 Mc/s, and then to calibrate the first i.f. tuning range of the receiver by injecting harmonics from a 100 kc/s crystal oscillator directly into it in parallel with the output of the converter.

Unless reception is to be confined to those times when the satellite is in the immediate vicinity of the station, some form of rotatable beam aerial will be necessary. This may take the form of a four- or five-element Yagi or the more elaborate stacked multi-element Yagi.

As the satellite will not maintain a constant attitude in space, signals from its quarter-wave ground-plane aerial may arrive in any plane and either horizontal or vertical polarization of the receiving aerial could be employed.

So far as amateur signals on the two metre band are concerned, these are almost invariably horizontally polarized, and with the multi-element arrays previously mentioned the vertical polar diagram is quite narrow. This would be perfectly satisfactory for communication with the satellite at extreme range, when it would be low on the horizon, but when it is nearer, and therefore at a greater elevation, the flat-topped beam would not be working at its best. This could be important when transmitting, and some amateurs are arranging for their arrays to be steerable in elevation as well as in azimuth. Bearing in mind, however, that for the nearer passes, signals even from a 100 mW transmitter, would be many decibels above the noise level, it is not considered necessary to provide for variable elevation of the aerial when reception only is intended.

### Expected Results

If Oscar III follows a similar polar orbit and at about the same height as its two predecessors, signals from it, given suitable receiving equipment, should be audible when it is at least 1,000 miles distant, which means that communication with its aid should be possible over twice that range.

The duration of signals during any pass, other things being equal, will depend upon its distance from the receiver with a maximum of about twelve minutes when the track takes it directly overhead.

It is intended that predictions of the satellite's tracks during its expected life of three to four weeks will be broadcast on Sunday mornings from the R.S.G.B. News Bulletin transmitters, GB2RS, operating the following schedule:

Frequency	Time	Location of Station
145.10 Mc/s	0930	Beaming north from London
	1000	Beaming west from London
145.80 Mc/s	1015	Beaming south from Belfast
145.30 Mc/s	1030	Beaming north west from Sutton Coldfield
	1100	Beaming south west from Sutton Coldfield
145.50 Mc/s	1130	Beaming north from Leeds
	1200	Beaming east from Leeds

It would be advisable to commence listening on the beacon frequency from five to ten minutes before the predicted time, depending upon whether the track is distant or near to the station, and as soon as this transmission is heard to start tuning the translator signal band.

\* United Kingdom Co-ordinator for Project Oscar, 24 Arundel Road, Tunbridge Wells, Kent.

# Miniature Selenium Rectifiers for

## VOLTAGE REGULATION PROBLEMS AND THEIR SOLUTION

FOR more than a decade it has been the established practice in television receivers to obtain the e.h.t. supply for the c.r.t. by rectifying the high-voltage pulse generated by the line-scanning circuit during the rapid flyback at the end of each scanning stroke. The principles of operation of the scanning and e.h.t. circuits are well known<sup>1</sup> and will not be discussed here. Valve rectifiers have been universally used for the e.h.t. although selenium stacks put in a brief appearance in early days when the size of receivers was still large enough to accommodate the relatively large stacks that were necessary with the techniques of the day. Although the component space available in modern television receivers has shrunk to very small proportions, it has been possible once again to consider selenium for the e.h.t. owing to the recent introduction of very small and efficient plates. These can be stacked into compact assemblies to give sizes comparable with valves, and modern automated manufacturing processes have kept the costs down to an attractively low level. The advantages to be gained from




Fig. 1. Equivalent circuit of e.h.t. rectifier.

the use of a selenium stack in place of a valve are the expectation of longer life, and the elimination of a heater winding from the line transformer (with its attendant design problems, especially relevant to dual line standard sets as are now current in Great Britain). To be set against these is the inferior voltage regulation of the selenium stack, which must be carefully controlled to keep within acceptable limits of performance, and the need to limit the maximum operating temperature to a safe level.

A given percentage regulation of the e.h.t. supply yields, in any television set, a given percentage variation, in picture size for different mean picture brightness levels. This change of picture size must be kept within bounds if the set is to be acceptable to the average viewer. Subjective tests have established what level is tolerable (this is bound to vary from one person to another and a compromise must be adopted) and this therefore sets the permissible level of e.h.t. percentage regulation for any television set. This article discusses the quantitative effect of rectifier forward and reverse resistance on the voltage regulation and offers some conclusions.

The conditions applying during the reverse-biased portion of the rectifier cycle are significantly different from those that would apply in normal sine-wave rectification. These conditions are examined and certain conclusions are drawn.

Some explanation is given of the need for mounting

the rectifiers in as cool a position as is obtainable in a television receiver. The causes of uneven distribution of heating throughout the stack are given, and the remedy is given as a recommendation to add shunt capacitance across part of the stack.

Finally, conclusions are given concerning the specification and use of these rectifiers which are the subject of various patent descriptions.

### Voltage Regulation


**Effect of Rectifier Forward Resistance:**—A simplified equivalent circuit of the e.h.t. rectifier is shown in Fig. 1 and the applied pulse waveform of voltage is illustrated in Fig. 2.

In Fig. 1,  $e$  is the instantaneous value of the input voltage, whose waveform is illustrated in Fig. 2;  $V$  is the d.c. rectified output voltage;  $r$  is the effective forward resistance of the source and of the rectifier in series;  $MR$  is an ideal rectifier of zero forward resistance and infinite reverse resistance;  $R$  is the effective load constituted by the cathode ray tube ( $V$  divided by the beam current) and  $C$  is a reservoir capacitance.  $R$  may be taken to include the shunt loading presented by the reverse resistance of a practical rectifier when reverse-biased.  $C$  is, in practice, constituted by the capacitance in the c.r.t. between the anode (internal conductive coating) and the external earthed coating.

In Fig. 2,  $T_1$  is the duration of the first half-cycle of the oscillatory waveform that constitutes the input voltage;  $T_2$  is the periodicity of the waveform (i.e. the reciprocal of the line frequency). Typically, the oscillatory period of a line-scan circuit is three times the line frequency, which would make  $T_2 = 6T_1$ . We can generalize, however, by putting  $T_2 = 2nT_1$ , where  $n$  is the frequency ratio. The equation of the first half-cycle of the waveform may be written as shown in Fig. 2.

If capacitor  $C$  is sufficiently large to make the time-constants  $rC$  and  $RC$  long compared with  $T_1$  and  $T_2$ ,

Fig. 2. Waveform of applied input.

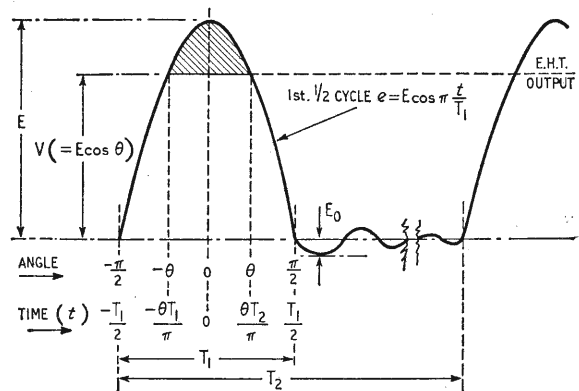

<sup>1</sup> See for example S.W. Amos and D.C. Birkinshaw, "Television Engineering", Vol. 4, pages 219-234. (Alternatively, W.T. Cocking, "Television Receiving Equipment", 4th edition, chapters 8 and 28). (Iliffe Books Ltd.)

# Television E.H.T.

By J. L. STORR-BEST,\* B.Sc.(Eng.), A.M.I.E.E.

we may assume that  $V$  remains constant throughout the cycle; that is to say, the charge injected via  $r$  into  $C$  during forward conduction of the rectifier, and the charge lost via  $R$  when the rectifier is reverse-biased, is small compared to the total charge on  $C$ . Since in practice  $C$  is of the order of 1500 pF whilst  $r$  and  $R$  are not less than 100k $\Omega$  and 100 M $\Omega$  respectively, the time-constants can be considered sufficiently long to justify this assumption.

With these conditions applying, we can see that the diode will conduct during the shaded portion of the input voltage. The current flowing from the source at any time  $t$  during this period is given by:—

$$i = \frac{I}{r} \left( E \cos \pi \frac{t}{T_1} - V \right)$$

and since  $V = E \cos \theta$ ,

$$i = \frac{E}{r} \left( \cos \pi \frac{t}{T_1} - \cos \theta \right)$$

The energy injected into the capacitor is:—

$$\begin{aligned} & \int_{-\frac{\theta}{\pi} \cdot T_1}^{+\frac{\theta}{\pi} \cdot T_1} i \cdot V \cdot dt \\ &= \frac{E^2}{r} \int_{-\frac{\theta}{\pi} \cdot T_1}^{+\frac{\theta}{\pi} \cdot T_1} \left( \cos \pi \frac{t}{T_1} \cdot \cos \theta - \cos^2 \theta \right) \cdot dt \\ &= \frac{E^2}{r} \left[ \frac{T_1}{\pi} \sin \pi \frac{t}{T_1} \cdot \cos \theta - \cos^2 \theta \cdot t \right]_{-\frac{\theta}{\pi} \cdot T_1}^{+\frac{\theta}{\pi} \cdot T_1} \\ &= \frac{E^2}{r} \left( \frac{2T_1}{\pi} \sin \theta \cos \theta - 2 \frac{\theta}{\pi} T_1 \cdot \cos^2 \theta \right) \dots (1) \end{aligned}$$

Now the energy lost from the capacitor during the complete cycle is:—

$$\begin{aligned} & \frac{V^2}{R} \times T_2 \\ &= \frac{E^2}{R} \cdot T_2 \cos^2 \theta \dots (2) \end{aligned}$$

Equating (1) and (2) we get

$$\frac{T_2^2}{R} = \frac{1}{r} \left( 2 \frac{T_1}{\pi} \tan \theta - 2 \frac{T_1}{\pi} \theta \right)$$


Hence

$$\frac{r}{R} = \frac{2T_1}{\pi T_2} (\tan \theta - \theta)$$

and if, as suggested earlier, we let  $T_2 = 2nT_1$  in a general case, the general solution becomes

$$\frac{r}{R} = \frac{\tan \theta - \theta}{n \cdot \pi} \dots (3)$$

Note that if we make  $n = 1$ , we have the condition for

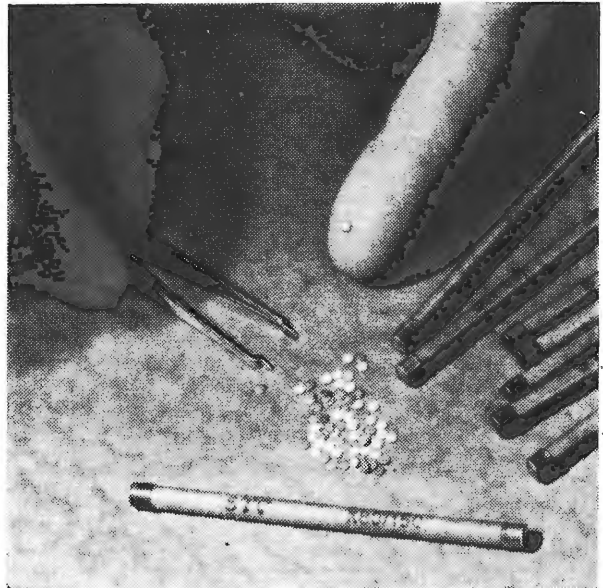

S.T.C. miniature e.h.t. rectifier elements.

normal sine wave rectification, and this provides the useful check that

$$\frac{r}{R} = \frac{\tan \theta - \theta}{\pi}, \text{ which is well-known.}^2$$

$$\text{Since } \frac{V}{E} = \cos \theta \dots \dots \dots (4)$$

we can see from equations (3) and (4) that  $\frac{V}{E}$  is a

function of  $\frac{r}{R}$ . This relationship has been plotted in Fig. 3

for the simple sine wave case, where  $n = 1$ , and the typical television case where  $n = 3$ . It will be seen that these curves are in fact regulation characteristics, with the output voltage,  $V$ , dropping as load current  $\frac{1}{R}$  is increased. The regulations of a given rectifier is *three times as bad* in the pulse rectification case, as it is in the sine-wave case. Matters look even worse when we compare the regulation of this pulse rectifier circuit to the equivalent d.c. case. Thus, the value of  $\frac{r}{R}$  for 95% output must be 44 times smaller than in a d.c. circuit; in other words, a 100k $\Omega$  series resistance measured by d.c. appears as a source resistance of 4.4 M $\Omega$  in the pulse rectifier circuit!

How bad a regulation can be tolerated and what does this mean in terms of specifying the forward characteristic of the rectifier? To answer these questions, first let us look at the effect of e.h.t. voltage regulation on television receiver behaviour, as seen by the viewer.

The spot deflection in a magnetically-deflected c.r.t. beam is given by  $D = \frac{K \cdot B}{\sqrt{V}}$  where  $K$  is a constant dependent on the tube and deflection coil geometry,  $B$  is the deflecting flux density and  $E$  is the e.h.t. voltage.

\*STC Semiconductor Division (Rectifiers)

<sup>2</sup>M. G. Scroggie, "The Diode Rectifier in Valve Voltmeters", *Wireless World*, July, 1954.

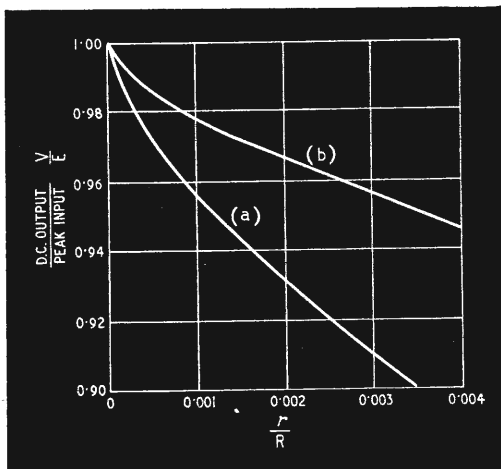


Fig. 3. Comparison of theoretical regulation curves obtained with the same rectifier for (a) TV pulse rectifier ( $n = 3$ ): (b) normal half sine wave rectifier ( $n = 1$ ).

Thus for a given current through the deflection coils, and hence for a given flux density, the deflection varies inversely as the square root of the e.h.t. In practical terms this means that, as the brilliance control is advanced and more beam current is drawn, the resulting drop in e.h.t. due to the voltage regulation of the rectifier system causes the picture to expand. If we neglect the effect of the change in rectifier load on the deflection scanning circuit, then a 5% drop in e.h.t. gives approximately a  $2\frac{1}{2}\%$  increase in picture width (and height). On a 20-in screen, this amounts to about  $\frac{1}{2}$  in increase in the diagonal.

It is convenient to define the voltage regulation in terms of an effective d.c. source resistance. For example, it has been found by subjective viewing tests that a performance which is just acceptable is given by an effective source resistance of  $8\text{M}\Omega$  for a change in beam current from zero to  $100\ \mu\text{A}$ . The interpretation of the "8 MΩ" is that the voltage drop from no load to 100 microamps is  $(8 \times 10^6) \times (100 \times 10^{-6}) = 800\ \text{V}$ . This constitutes a 5% regulation on a 16 kV e.h.t. supply.

We can now begin to see what the maximum forward resistance of the rectifier must be.

$$\begin{aligned} \text{Thus e.h.t. on no load} &= 16\ \text{kV} \\ \text{e.h.t. on } 100\ \mu\text{A} &= 15.2\ \text{kV} \\ R &= \frac{15.2 \times 10^3}{100 \times 10^{-6}} \approx 150\ \text{M}\Omega \end{aligned}$$

$$\text{Since } \frac{V}{E} = \frac{15.2}{16} = 0.95$$

$$\theta = \cos^{-1} 0.95 = 0.3176$$

$$\therefore \frac{r}{R} = \frac{\tan \theta - \theta}{n\pi} = \frac{0.3288 - 0.3176}{3\pi} \quad (\text{if } n = 3)$$

$$= 0.00119$$

$$\begin{aligned} \therefore r &= 0.00119 \times 150\ \text{M}\Omega \\ &= 180\ \text{k}\Omega \end{aligned}$$

Thus a forward slope resistance of 180 kΩ yields an effective regulation resistance of 8 MΩ. The peak current through the rectifier is  $800/180 = 4.4\ \text{mA}$ .

**Effect of Rectifier Reverse Resistance:**—During the period of the cycle in which the diode is not conducting the capacitor C loses charge both through the beam current path (150 MΩ in the above example) and through the leakage path of the reverse-biased diode. Thus if,

for example, the diode leakage current is  $50\ \mu\text{A}$ , we have in shunt with the  $150\ \text{M}\Omega$  an effective resistance of

$$\frac{15.2 \times 10^3}{50 \times 10^{-6}} \approx 300\ \text{M}\Omega$$

Thus R becomes  $\frac{150 \times 300}{450} = 100\ \text{M}\Omega$  for a load current of  $100\ \mu\text{A}$ .

For zero load current R is simply the 300 MΩ due to reverse leakage current.

$$\therefore \text{At zero, } \frac{r}{R} = \frac{180\text{k}\Omega}{300\text{M}\Omega} = 0.0006, \text{ from which } \frac{V}{E} = 0.968$$

$$\text{At } 100\ \mu\text{A, } \frac{r}{R} = \frac{180\text{k}\Omega}{100\text{M}\Omega} = 0.0018, \text{ from which}$$

$$\frac{V}{E} = 0.933$$

$$\begin{aligned} \text{Hence the voltage drop from 0 to } 100\ \mu\text{A is} \\ 16(0.968 - 0.933)\ \text{kV} = 560\ \text{V.} \end{aligned}$$

Thus the effect of the presence of this finite rectifier reverse resistance is to improve the regulation resistance from 8 MΩ to 5.6 MΩ. On the other hand, the e.h.t. output is of course lower than it would have been in the absence of leakage current. The no load output is approximately 15.5 kV instead of 16 kV, and the 100 μA load output is about 14.9 kV instead of 15.2 kV.

The conditions applying during the reverse-biased portion of the cycle are, in practice, complicated by the presence of shunt capacitance to earth, distributed down the length of the rectifier stack. The effect of this is to give a gradient of reverse voltage per plate rising to a peak at the pulse input end of the stack. This effect, and the remedy, is discussed later.

It has been shown that to obtain the acceptable figure of 8 MΩ regulation resistance requires a total forward resistance (source + rectifier) of 180kΩ. Now the source will generally constitute a significant part of this 180kΩ, depending on the design of the line output stage and transformer. In one practical case on which measurements were made, the regulation due to the source alone (i.e. measured with a valve rectifier) was 6 MΩ and, in an improved design†, 3 MΩ. In the former case, the 6 MΩ is equivalent to 110kΩ, so that only 70kΩ is left for the rectifiers. It is found that with the quality of 2-mm plates at present available, it is not possible to obtain such a low forward resistance whilst having sufficient plates to withstand the maximum reverse voltage.

**Conclusion 1.** 2-mm selenium e.h.t. stacks can only be used in television sets in which the line output stage (and transformer) design is good enough. To check whether this is so, the e.h.t. regulation should be measured between 0 and 100 μA, using a valve rectifier. If the regulation resistance, measured in this way, exceeds about 3 or 4 MΩ, it will be impossible to use a 2-mm selenium stack rectifier and obtain an acceptable regulation.

Fig. 4 illustrates the measured forward characteristic of a selenium stack containing 170 2-mm. plates. The characteristic may be approximated by the dotted straight line. This line, in turn, represents the forward characteristic of a perfect rectifier of zero forward resistance, in series with a resistance of a perfect rectifier of zero forward resistance, in series with a resistance of 45kΩ. Thus, three of these in series (which may be necessary to withstand a certain required reverse voltage) will be equivalent to a bias voltage of 360V. in series with 135kΩ.

† The new Thorn miniature jellypot line transformer



The 360V is significant only in that it imposes a fixed voltage drop at all load currents; on the other hand, as already discussed, the 135k $\Omega$  determines the *voltage regulation*. A practical test was carried out with three such rectifiers, working from an output stage and transformer of 3 M $\Omega$  regulation (measured as described above). Now 3 M $\Omega$  regulation resistance is equivalent to 40k $\Omega$  series source resistance, calculated by the methods described. Therefore the combined series resistance of source and rectifier should be about 185k $\Omega$ , it will be remembered that a 180k $\Omega$  series resistance yields, by calculation, an 8 M $\Omega$  regulation resistance if no leakage current is present. In the measured case, these three rectifier stacks gave a regulation resistance of 10 M $\Omega$ , which is a reasonable correlation considering the assumptions that have been made. The numerical illustrations are chiefly of use in obtaining an understanding of the dependence of rectifier performance on certain parameters rather than of yielding specification data. Once the former is understood, the latter can be fixed experimentally with a high degree of confidence.

The addition of 10 pF capacitance across one of the stacks (for a reason to be discussed later) had the effect of worsening the regulation resistance from 10 to 16 M $\Omega$ . The explanation of this effect is not complete, but it is known from many practical observations that the addition of shunt capacitance always worsens the regulation.

It was concluded that these 170-plate rectifier stacks would not be satisfactory for television e.h.t. owing to the excessive regulation resistance produced, particularly when the necessary shunt capacitance was added. At the same time, it would not be possible to reduce greatly the number of plates whilst still being able to withstand the absolute maximum reverse voltage; if the reverse voltage per plate is allowed to become too great, the rise in leakage current may be too great for safe operation and the reduced level of e.h.t. may become unacceptable.

A suitable compromise can be made with a reduced number of plates per stack. For example, a 150-plate stack will reduce the regulation resistance, including the effect of added shunt capacitance, to about 9 M $\Omega$ . In this case, improvement to the specification figure of 8 M $\Omega$  can be met by control of plate forward characteristic. This is the basis of the present design.

**Conclusion 2.** To obtain a regulation resistance not exceeding 8 M $\Omega$  from 0 to 100  $\mu$ A (on a nominal 16 kV d.c. output) three stacks with 150 plates each should be used. (This does not mean that the current is limited to 100  $\mu$ A nor the d.c. output of 16 kV.

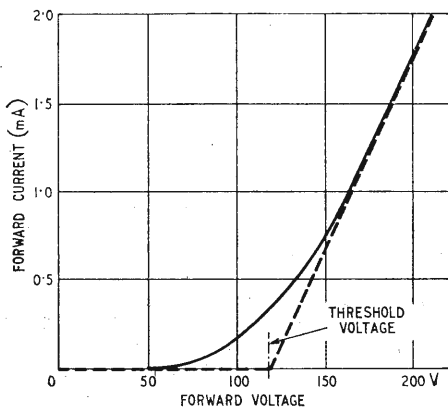


Fig. 4. Measured forward characteristic of a typical 170-plate 2-mm selenium stack.

It is merely an assessment of the requirements for voltage regulation.)

### Reverse Voltage

The main difference between the reverse voltage conditions of a pulsed e.h.t. rectifier and that of a sinusoidal e.h.t. rectifier may be summarized as follows. The peak inverse voltage (p.i.v.) of a pulsed input rectifier may be only a small percentage above the d.c. output voltage, whereas for a sinusoidal input, the p.i.v. is at least twice the d.c. output. (In Fig. 2 it will be seen that the p.i.v. is  $V + E_0$ , which would approach  $E + E_0$  on zero beam current and with zero leakage rectifiers.) To be set against this advantage of a lower p.i.v. per d.c. volt, is the disadvantage that the reverse voltage persists for a much larger percentage of the cycle; with a sinusoidal input, only during a very small portion of the cycle is the reverse voltage at a high level (around the peak of the sinewave); with the pulse input, d.c. blocking conditions almost apply.

As shown earlier there is another disadvantage in the pulse input compared with the sinusoidal input: the voltage regulation of a given stack is worse by the ratio of equivalent pulse frequency to line frequency; i.e. if the line scan transformer circuit resonates at three times the line scan frequency, then the regulation of the rectifier will be three times as bad as it would be when fed with a sine-wave input at line frequency. This is partly offset by the lower p.i.v. and therefore by the reduced number of plates in use; however, to achieve equally as good a regulation as with sinusoidal input, it would be necessary to use even less plates, and hence to end up with a requirement for a greater p.i.v. per plate.

The actual p.i.v. quoted for a particular stack is largely a matter of definition: the principles have been explained above. Thus, the p.i.v. for pulse rectification will actually be *lower* than for sinusoidal operation because of the "blocking" duty performed, as previously explained. Sinusoidal ratings, on the other hand, tend to be conservative since they are intended for a wide variety of general applications. A further consideration is that the pulse rating, for the particular application of television line flyback pulses, must be made as keen as possible in order to be able to achieve at all necessary compromise between voltage regulation and p.i.v. For this reason it is considered that a single p.i.v. rating can be given for both sinusoidal and television pulse inputs. The d.c. rating should of course be lower than this figure, as mentioned above.

The ratings adopted for the present rectifier stack designs are as follows:—

150-plate stack Code X80/150. D.c. reverse voltage at 20  $\mu$ A:—6000 V. (40V/plate). P.i.v. sinusoidal or t.v. pulse input :—6750V. (45V/plate). Stacks with other numbers of plates may be rated accordingly.

### Rectifier Heating

**Causes:**— As in most rectifiers, heating is due to forward conduction, in which power is dissipated by a high current at low voltage; or to reverse leakage, by which power is dissipated by low currents at high voltage.

Some idea of dissipation can be obtained by re-examining Figs. 1 and 2 and working out an example. Figures that will not be far from those of a practical case, and are convenient to use, are as follows:—

Source resistance = 40k $\Omega$  (Corresponds to a 3 M $\Omega$  regulation resistance)  
 Stacks used = 3  $\times$  150-plate

Forward resistance total = 120kΩ (Cf. Fig. 4 for a single 170-plate stack)

Total forward threshold voltage = 315V  
 Leakage current, total = 30 μA  
 Peak input voltage = 16 kV  
 Stray capacitance = Zero (to reduce complexity of analysis)

The *forward dissipation* is given by integrating the product of diode forward current and voltage over the conducting portion of the cycle. In Fig. 5, which takes into account the rectifier "threshold" voltage, the shaded area represents conduction.  $V$  is the d.c. rectified voltage and  $V_d$  is the rectified "threshold voltage" (corresponding to the horizontal intercept of the straight dotted line in Fig. 4). Conduction starts when the input voltage exceeds the d.c. + the threshold voltage.

The voltage across the rectifier during conduction =  $e - V$

=  $E \cos \pi \frac{t}{T_1} - a.E \cos \theta$  (if  $V$  is some fraction  $a$  of the combined voltage ( $V + V_d$ )).

$$= E \left( \cos \pi \frac{t}{T_1} - a \cos \theta \right)$$

The current through the rectifier =  $\frac{e - (V + V_d)}{r}$

$$= \frac{E}{r} \left( \cos \pi \frac{t}{T_1} - \cos \theta \right)$$

The energy dissipated per pulse of conduction is given by

$$J = \frac{E^2}{r} \int_{-\frac{\theta T_1}{\pi}}^{\frac{\theta T_1}{\pi}} \left( \cos \pi \frac{t}{T_1} - \cos \theta \right) \cdot \left( \cos \pi \frac{t}{T_1} - a \cdot \cos \theta \right) dt$$

$$\therefore J = \frac{E^2}{r} \cdot \frac{T_1}{2\pi} [2\theta(1 + 2a \cos^2 \theta) - (1 + 2a) \sin 2\theta]$$

Therefore if  $W$  is the mean power dissipation due to forward conduction

$$W \times T_2 = J$$

or  $W \times nT_1 = J$  (using the symbol  $n$  as before)

$$\therefore W = \frac{J}{nT_1}$$

$$= \frac{E^2}{r} \cdot \frac{1}{2n\pi} [2\theta(1 + 2a \cos^2 \theta) - (1 + 2a) \sin 2\theta]$$

In the practical case given, the following figures are calculated between 0 and 500 μA load (beam) current.

Beam Current (μA)	E.H.T. (kV)	Peak rectifier current (mA)	Forward power dissipation
0	15.35	2.1	50 mW
100	14.8	5.5	340 mW
300	14.1	10.0	950 mW
500	13.6	13.1	1.9 W

Now the *reverse* dissipation is approximately constant at about 15 kV × 30 μA = 450 mW if we neglect the rise of leakage current due to the forward heating of the stack.

Therefore we can roughly say that at the normal picture setting, which corresponds to a little over 100 μA, the forward and reverse losses contribute fairly equally. At extreme brightness, or with a worn c.r.t., the forward losses will contribute most to the heating.

These calculations only give a guide to the conditions and give a feel for the order of power involved. In

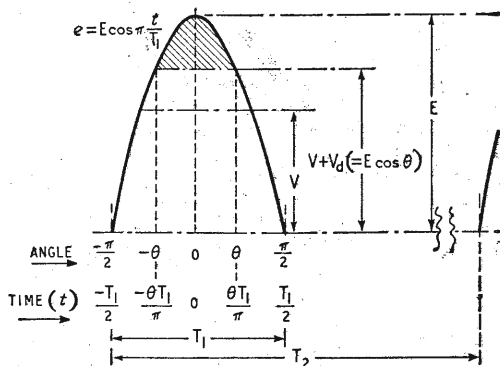


Fig. 5. Basis for calculating forward dissipation.

practice, they will be modified for a number of reasons. The most important of these is probably the fact that extra reverse leakage current must flow, particularly in the plates nearest the pulse input, in order to charge up the stray capacitance to earth. At the relatively high frequencies involved in 625-line receivers, this current can be appreciable. It leads in fact to a marked temperature gradient over the length of the complete stack assembly, and precautions have to be taken to even this out in order to avoid overstressing the first stack. The effect may be analysed by regarding the reverse-biased rectifier assembly as a transmission line consisting of series and shunt capacitances; the series elements are the effective capacitances of the rectifier plates, and the shunt ones are the stray capacitances to earth. Such an analysis shows that the voltage gradient may be reduced by increasing the ratio of series-to-shunt capacitance, and hence reducing the proportion of the transmitted current that is lost by "earth-capacity leakage" at each plate junction. It is not possible in this case to apply the suggested method literally, i.e., by adding shunt capacitance across each plate, or even across each stack of plates; this would increase the total stack capacitance, and hence the capacitance across the tuned line transformer; since the latter has an extremely high L/C ratio, very little extra capacitance can be tolerated. The solution\*\* was to apply a small amount of shunt capacitance across just the first stack of the three. The effective input capacitance was then not increased beyond the value of two of the stacks in series. By a proper choice of capacitance value it was possible to find a condition in which the heating of the first stack could be brought down to equality with the other two. A value of 10 pF was found to be about optimum.

Finally, whilst discussing the causes of rectifier heating, the ambient temperature cannot be overlooked. The position which the rectifier is required to occupy for functional reasons is perhaps the worst in the set; this is because the line output valve carries a very heavy dissipation and because the assembly must be properly screened to reduce radiation. Particular care must therefore be taken to keep the ambient temperature within bounds.

#### Recommendations

(1) The stack should not normally be expected to deliver more than 300 μA d.c. to the load. This should be ample for the requirements of television monochrome receivers, and short-period excesses may not be harmful.

(2) A 10-pF capacitor of adequate working voltage, should be shunted across the first rectifier of a stack of three to even out the temperature gradient of the three stacks. This value may not be optimum for all con-

\*\* Br. Pat. Application No 38622/63

ditions, and layout variations that appreciably affect shunt capacitance may require the value to be modified. With a different number of stacks the same principles will apply and an optimum should be found experimentally.

(3) The temperature surrounding the stack, after normal stabilization, should not be allowed to exceed 50°C.

### General Conclusions

If properly used, 2-mm h.v. selenium stacks may be chosen with advantage as a substitute for a valve rectifier in the line flyback e.h.t. circuit of television receivers. The advantages to be expected are a longer life and the reduction of cost, size and complexity of the line scan output transformer by the elimination of the valve heater winding.

The voltage regulation of a television e.h.t. supply determines the extent to which picture size varies with brilliance. Selenium rectifiers give a poorer regulated supply than valve rectifiers and can only be used in this application if the regulation of the line output stage (including transformer) is already good. This should be checked, using a valve rectifier. (If no heater winding is available on the transformer, a battery supply can be used for the test.) The e.h.t. voltage should not drop by more than 400V, and preferably not more than 300V, when the c.r.t. beam current is increased from zero to 100 $\mu$ A. (300V drop at 100 $\mu$ A corresponds to a 3M $\Omega$  "regulation resistance".) If the line output circuit gives a worse regulation than this with a valve rectifier, there is little hope that the performance will be acceptable with a 2-mm selenium stack rectifier. (The ultimate criterion is a subjective test to judge the degree of viewer annoyance caused by the change of picture size when the brilliance control is adjusted from a black to a fully bright picture.) Measurement of "regulation resistance" should always be made with the line oscillator running at the correct line frequency, preferably synchronized.

Three similar stacks in series are generally needed for the normal level of e.h.t. found in ordinary domestic monochrome receivers. The number of plates to be specified per stack should be matched to the maximum p.i.v. expected from the type of receiver to be used, with the controls set for normal operation. (The p.i.v. for this purpose should be taken as the voltage amplitude between the crest of the positive voltage pulse applied to the rectifier and the trough of the first negative overshoot pulse.) If the number of plates is made greater than necessary, the voltage regulation may suffer; if too small, the rectifier may overheat due to overvoltage per plate in reverse. A figure of 45V reverse per plate should be used for this estimation. On a d.c. test, the voltage expected should not be less than 40V per plate at 20 microamps.

A small capacitor, of appropriate working voltage, should be connected in shunt with the stack nearest to the pulse input. The value of this capacitor will be of the order of 10pF; an optimum value may be chosen by selecting one such that the heating of the first stack is no greater than that of the other two. (With zero capacitance, the first stack may overheat; with too great a capacitance, the first stack may be "bypassed" and stay cold whilst the other two carry the full burden and overheat.) Since this bypass capacitor is to compensate for the effect of stray earth capacitance, the optimum value may be expected to vary with circuit layout.

The stacks should not, under normal working conditions, be permitted to deliver more than 300 $\mu$ A d.c. into the load. This should be perfectly adequate for monochrome receivers. Currents up to twice this amount will not, however, cause catastrophic failure.

Whilst it is necessary, by virtue of its functional position in the set, for the rectifier to work in a high temperature area (e.g., near the heavily dissipating line output valve) every effort should be made to keep the surrounding temperature as low as possible. In any case, this temperature must not be allowed to exceed 50°C. This may call for some ingenuity in set design since close screening will almost certainly be used in this area to reduce radiation. This problem can, however, be solved without great expense in practical receivers by appropriate positioning of the rectifiers and by making adequate ventilation arrangements.

**Acknowledgements:**—The development work on the selenium rectifiers for this application was carried out with the co-operation of the Thorn Television Laboratories, whose assistance has been much appreciated. Finally, the author would like to thank the management of Standard Telephones and Cables Limited for permission to publish this article.

**Addendum:**—It is worth recording that since the first draft of this article was prepared, significant improvements to the design and manufacturing techniques of these rectifiers have been made. In particular, these have led to a marked reduction of forward losses and a consequent improvement in voltage regulation characteristics. With the earlier designs, on which numerical examples in the article are based, the number of plates had to be chosen as a narrow compromise between p.i.v. and voltage regulation performance. The quality of current rectifiers is now, however, such that there is a good working margin between acceptable limits for these two parameters.

Fig. 6 gives a comparative illustration of the forward characteristics of a typical 150 plate rectifier of to-day compared with one of a year ago. (Fig. 4 of the article shows a 170 plate rectifier of this earlier period.) It will be seen that the forward slope has considerably improved, i.e., the slope resistance is lower, and that the effective threshold voltage is lower. Voltage regulation resistance, including the contribution from the Thorn jellypot transformer, is now typically only 5M $\Omega$  from 0 to 100 $\mu$ A beam current; subjective viewer tests have shown this to be a very worthwhile improvement in performance as regards picture size variation with brilliance control setting.

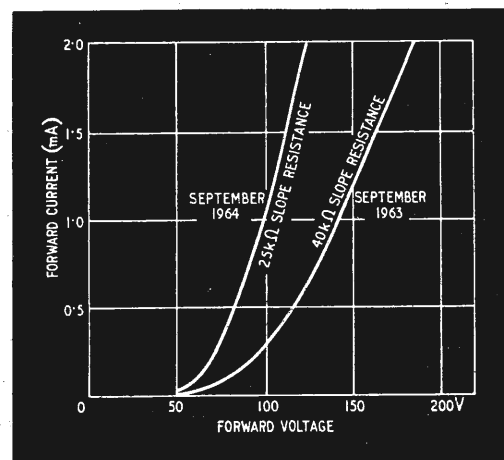


Fig. 6. Comparison between the measured forward characteristics of typical 150-plate miniature selenium e.h.t. rectifiers (Type X80/150) showing improved performance of present production.

# Monostable Blocking Oscillator

HIGH-POWER, FAST PULSES FROM TWO TRANSISTORS

By M. D. A. B. RACKOWE, \* B.A.

SOME simple blocking oscillator monostable circuits are known<sup>1</sup> which produce pulses of good shape, but relatively low power. If these pulses are then amplified by a power amplifier, the pulse shape is liable to deteriorate unless rather elaborate circuitry is used. In the circuit described here, the power amplifier is included in the positive feedback loop, and peak powers of the order of 1 watt may be obtained using a very simple two-transistor circuit.

## Description of Circuit

When the circuit shown in Fig. 1 is in its stable state transistors T1 and T2 are both cut off, the base/emitter junction of T1 being reverse biased by the potential divider in its emitter circuit. The application of a positive triggering pulse via the input differentiating network to the base of T1 overcomes the reverse bias and causes collector current to flow in T1. This is directly coupled to the base of T2, which therefore turns on. A voltage is induced in the secondary of the output transformer, which is connected to T1 emitter in such a way that the emitter is driven negative. Thus T1 is driven further into conduction, since its base is clamped by a diode. This regenerative action means that T2 turns on very rapidly, giving the output pulse a fast leading edge. Conduction proceeds until capacitor C has charged to such a voltage that T1 base/emitter junction is no longer forward biased. T1 collector current now falls, and the regenerative action takes place in reverse, ensuring a rapid turn off.

The resistor in the emitter of T2 is merely to prevent thermal runaway. The amplitude of the output pulses depends on the supply voltage, and the primary/output winding turns ratio of the transformer.

## Pulse Duration

Consider the circuit in its stable state. The supply voltage is  $-V$  volts, and the potential at T1 emitter with respect to the negative supply is

$$\frac{R_1 V}{R_1 + R_2} \approx \frac{R_1}{R_2} V \text{ if } R_1 \ll R_2$$

Suppose a positive pulse is now applied at the input. Regenerative action takes place and T2 bottoms. A step of  $V$  volts occurs in the transformer primary, and a voltage of  $N_3 V/N_1$  in the secondary.

The potential at T1 emitter is now

$$\frac{R_1}{R_2} V - \frac{N_3}{N_1} V$$

The capacitor C now charges until the potential at T1

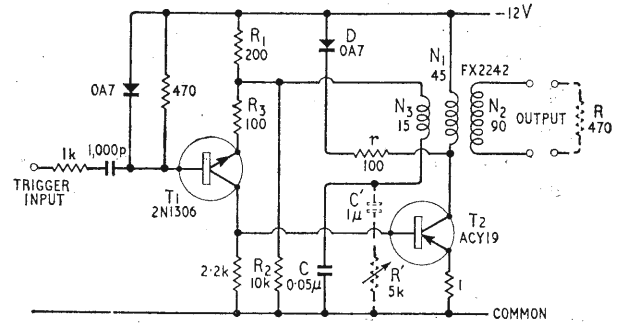


Fig. 1. Circuit of blocking oscillator. Components shown dotted control pulse duration.

emitter reaches  $-V_{BE}$ , whereupon T1 cuts off, marking the end of the pulse.

The time taken by C to charge from  $V(R_1/R_2 - N_3/N_1)$  to  $-V_{BE}$  is therefore the pulse duration.

The charging current for C flows through both  $R_3$  and the potential divider formed by  $R_1$  and  $R_2$ . Fig. 2 shows the equivalent charging circuit for the duration of the pulse.

Consider the instantaneous voltage  $v$  across C. By Thévenin's theorem, the contribution due to  $R_1$  is  $R_3/(R_1 + R_3) \cdot VN_3/N_1(1 - e^{-t/RC})$  where R is the parallel combination of  $R_1$  and  $R_3 = R_1 R_3 / (R_1 + R_3)$ .

The contribution due to  $R_3$  is

$$\frac{R_1}{R_1 + R_3} \cdot \left( V \frac{N_3}{N_1} - V \frac{R_1}{R_2} - V_{BE} \right) \left( 1 - e^{-t/RC} \right)$$

$$\therefore v = \left( V \frac{N_3}{N_1} - K \right) \left( 1 - e^{-t/RC} \right)$$

$$\text{where } K = \frac{R_1}{R_1 + R_3} \left( V \frac{R_1}{R_2} - V_{BE} \right)$$

$$\text{T1 turns off when } v = -V_{BE} - V \left( \frac{R_1}{R_2} - \frac{N_3}{N_1} \right)$$

$$\text{or } \left( V \frac{N_3}{N_1} - K \right) \left( 1 - e^{-t/RC} \right) = -V_{BE} - V \left( \frac{R_1}{R_2} - \frac{N_3}{N_1} \right)$$

$$\therefore e^{-t/RC} = \left( \frac{V_{BE} + VR_1/R_2 - K}{VN_3/N_1 - K} \right)$$

$$\therefore t = RC \log \left( \frac{VN_3/N_1 - K}{V_{BE} + VR_1/R_2 - K} \right)$$

At the end of the pulse C discharges through  $R_1$  and  $R_2$ , and this time constant must be kept short, so that C is fully discharged before the next pulse is required.

\* AMF British Research Lab. (now with Coutant Electronics)

<sup>1</sup> "Functional Circuits and Oscillators," H. J. Reich, (Van Nostrand, 1961.)

## Maximum Repetition Frequency

If the load across the output winding is  $R_L$ , then the load reflected into the primary is  $R_L N_1^2/N_2^2$ .

If this is large compared with the emitter resistor, then the maximum current  $I = V/R_L(N_1/N_2)^2$ .

At the end of the pulse, energy stored in the transformer primary inductance  $L$  is  $\frac{1}{2} LI^2$ . As the induced voltage goes negative with respect to  $V$ , the resistor  $r$  in series with the catching diode  $D$  appears in parallel with the load reflected into the primary winding. Thus the effective resistance is

$$\frac{r R_L (N_1/N_2)^2}{r + R_L (N_1/N_2)^2}$$

The reverse voltage transient therefore has the value

$$\frac{IrR_L}{r \left( \frac{N_2}{N_1} \right)^2 + R_L} = \frac{Vr}{r + \left( \frac{N_1}{N_3} \right)^2 R_L}$$

The rate at which the voltage decays is given by the formula

$$v = \frac{Vr}{r + \left( \frac{N_1}{N_2} \right)^2 R_L} \exp \left[ - \frac{L}{rR_L} \left( r \left( \frac{N_2}{N_1} \right)^2 + R_L \right) t \right]$$

This determines the maximum p.r.f. at which the circuit may be used, since the reverse voltage must fall to a low value, before the circuit can again be triggered.

## Triggering

In order to trigger the monostable, the trigger pulse must have sufficient amplitude to forward bias T1. The reverse bias of the emitter is  $VR_1/R_2 + V_{BE}$ .

It is also required that after the trigger pulse is removed, the loop gain of the circuit should be greater than unity. In the section on pulse duration it was found that the feedback winding develops a voltage  $VN_3/N_1$ . Current flowing in  $R_3$  is therefore  $(VN_3/N_1 - VR_1/R_2 - V_{BE})/R_3$ .

This current flows in T1 collector, and if the effective current gain of T2 is  $\beta$ , then the transformer primary current is  $\beta/R_3 (VN_3/N_1 - VR_1/R_2 - V_{BE})$ .

In the last section it was found that the primary current actually flowing is  $V/R_2 (N_1/N_2)^2$ . Therefore the loop gain is

$$\frac{\beta R_2 (N_2/N_1)^2}{VR_3} \left( V \frac{N_3}{N_1} - V \frac{R_1}{R_2} - V_{BE} \right)$$

The power  $P$  delivered to the load is  $\frac{V^2}{R_2} \left( \frac{N_1}{N_2} \right)^2$

so the loop gain in terms of power is

$$\frac{\beta V}{PR_3} \left( V \frac{N_3}{N_1} - V \frac{R_1}{R_2} - V_{BE} \right)$$

It would appear, therefore, that for a given loop gain the power output can be increased if  $R_3$  is reduced or  $N_3/N_1$  increased. These terms, however, govern the power required by the feedback circuit, which must be subtracted from the available output power.

## Control of Pulse Duration

It was seen earlier that pulse duration can be controlled by varying  $R_1$ ,  $R_2$ ,  $R_3$  or  $C$ . Since  $R_1$  and  $R_2$  affect the d.c. levels in the circuit and  $R_3$  affects the loop gain, it is most convenient to vary  $C$ . If a continuously variable




Fig. 2. Equivalent charging circuit of  $C$ .

control is required, the components of  $R'$  and  $C'$ , shown dotted in the diagram, are added. Minimum pulse duration is determined by  $C$  and maximum duration by  $C'$ . If  $C$  is made very small, the transit times become a significant proportion of the total pulse time, and the pulse tends towards a spike. Rise and fall times can be improved by using fast transistors, but it is also necessary to reduce the size of the pulse transformer, in order to minimise losses, and winding capacity. However, the size of the transformer also governs the maximum pulse duration available, since if it is small and therefore has time to saturate, the pulse will have a marked droop. It was found in practice that a width ratio of 20:1 was quite readily attainable.

## Practical Design

Fig. 2 shows the component values used in a practical circuit.

The primary/output winding turns ratio of the transformer gives a 2:1 step up in voltage. Since a 12-volt power supply is used, the output pulses have an amplitude of 24 volts, which is delivered into a 470  $\Omega$  load. Output power during each pulse is therefore 1.2 W.

The values of  $C$  and  $C'$  give a range of pulse widths between 10  $\mu$ sec. and 200  $\mu$ sec., continuous control being obtained by means of the 5k $\Omega$  variable resistor in series with  $C$ .

At minimum pulse width the maximum repetition frequency is 25 kc/s, and at maximum pulse width it is 2 kc/s. For continuous operation at a high duty cycle, the output transistor should be mounted on a heat sink.

## Conclusion

This type of circuit affords a simple means of obtaining medium-power pulses. If pulses of higher power than this are required, the loop gain must be maintained by increasing the effective current gain of the output transistor. This can be simply achieved by including an emitter follower between T1 and T2. The circuit has been found particularly useful for firing s.c.r.'s where a number of these devices have to be triggered at the same time.

### INFORMATION SERVICE FOR PROFESSIONAL READERS

To expedite requests for further information on products appearing in the editorial and advertisement pages of *Wireless World* each month, a sheet of reader service cards is included in this issue. The cards will be found between advertisement pages 16 and 19.

We invite readers to make use of these cards for all inquiries dealing with specific products. Many editorial items and all advertisements are coded with a number, prefixed by 16WWW, and it is then necessary only to enter the number(s) on the card.

Readers will appreciate the advantage of being able to fold out the sheet of cards, enabling them to make entries while studying the editorial and advertisement pages.

Postage is free in the U.K., but cards must be stamped if posted overseas. This service will enable professional readers to obtain the additional information they require quickly and easily.

# UNITS

By "CATHODE RAY"

I SUSPECT that most people in our line reckon the subject of units is pretty boring. It may look like a side issue, all right for a few specialists to get on with, but of no great practical value. Or, if one does glance into the history, its murky and confusing appearance discourages further investigation.

There certainly is a long and tangled history, which like most things has been speeding up lately. The progress made in the last few years has been so great that those whose student days are well behind may need a little refresher. After all, getting our sums right is of great practical value, and without clear ideas about units it is quite easy to get them wrong. And as for the more distant history, that is really quite fascinating. The French Revolution might not seem particularly relevant for us—and anyway, didn't it show its contempt for science by sending to the guillotine Lavoisier, one of the greatest scientists of his time, who devised the first systematic chemical notation, in use to this day? Yet paradoxically it initiated the metric system, which also is in use to this day. That was by far the biggest step forward in the whole progress of units, because it was something quite new and it provided the basis of the system that has become universally adopted for science (and, in an increasing number of countries, for every purpose).

## International System

This present-day system of units is known officially as SI (Système Internationale d'Unités). It is an extension of the m.k.s. system, which itself was based on the metric system.

You may perhaps be thinking that we have only just changed over to the m.k.s. system—with an effort—and why should this SI appear so soon? Some pockets of c.g.s. resistance, such as the magnet industry, haven't even got as far as the m.k.s. system and will feel doubly injured. So let us take a broad look at the reasons for these changes.

Obviously for every kind of trade there is a need for units of quantity. And to establish confidence, the quantities represented by those units should be generally agreed; they must be the same for buyers and sellers. In the early days, when trade was mostly quite local, each district had its own units. And there was a tendency, not yet extinct, for each trade to have its own units. And so we still have a difference of more than a pint between the American and British gallons to cause confusion in car performance figures and cookery recipes. And there are innumerable trade measures such as crans, pipes, pecks, barrels (of different sizes), bundles and trusses. Now that trade as well as science and technology is world-wide, there can surely be no doubt that the ideal is one and only one basic system of units for all purposes everywhere.

Every unit must be realized in some physical standard. Our unit of length, the foot, was originally the length of an adult human foot; but while this standard had the advantage of being plentifully distributed there was the obvious disadvantage of imprecision. With the increasing need for accuracy there began the practice of establishing

one carefully preserved standard, of which all others were copies; and so the foot is now one-third of the distance between two marks on a bronze standard yard.

Clearly the units of a lot of quantities can be derived from others. There is no need to have independent standards of area and volume, since unit area can so easily be defined as the area enclosed by a square of unit length of side, and so on. One great advance made in 1790 with the invention of the metric system was to reduce the independent units to two—length and time—and to base them not on arbitrary man-made standards but on the earth itself. So the standard of length, the metre, was defined as one ten-millionth of the distance from pole to equator along the meridian through Paris, and the second was  $1/86,400$  of a day. The unit of mass (the gramme) was tied to that of length and the density of water by defining it as the mass of a cubic centimetre of water at normal atmospheric pressure and the temperature of maximum density.

Although the standard of mass was defined in terms of length and the properties of a natural product, mass is quite different in kind from length and time, so the metric system is regarded as based on three fundamental quantities. Other quantities such as velocity and force can be derived from these.

Another valuable innovation of the metric system was that all multiples and subdivisions (except those of time, which presumably were considered too well established and already universal) were to be decimal. So the metric system is much easier to learn than our "12 inches one foot, 3 feet one yard," etc. notwithstanding that "5½ yards one rod, pole or perch" has recently been abolished.

## Mass and Weight

At this point we ought to take note of the confusion of thought that often exists with regard to mass and weight. The Weights and Measures Act of 1878 defines the pound as the weight of a certain piece of platinum and declares it to be "the standard measure of Weight and of measure having reference to weight." Now if that piece of platinum was really a standard of weight there would need to be some reference in the Act to *where* it was. Weight is a force that depends on gravitational attraction, which varies between different places on the earth's surface—to say nothing of spaceships. One can be quite sure that what was in the minds of those who worded the Act was not a force but a quantity of material, for which the correct word is mass. When you buy a pound of sugar it is the quantity of sugar you are interested in, not its weight. A pound (mass) of sugar is just as nutritious in orbit, where its weight is nil, as on the ground. So although the word "weight" occurs seven times in our legal definition of a pound and "mass" not at all, it really defines a unit of mass, just like the original cubic centimetre (gramme) of water in the metric system or the kilogramme of metal which became its actual embodiment. But because it happens that at any given point the force of gravity (i.e., the weight) is directly proportional to mass, the practical method of comparing masses is by weight. If the force on a bag of sugar is shown by a balance to be the same as that on a piece of iron marked

"2 lb," the mass of the sugar is thereby shown to be 2 pounds.

In a shop on a high mountain the forces on both would be less. They would both weigh less, but they would still be equal, as would be their masses. But note that if weight is measured as such, by means of a spring balance, then the quantity of sugar you would get in the mountain shop would be more than you would get at sea level with the machine indicating the same weight. In a spaceship a spring balance would indicate nothing at all, however much was hung on it.

### Coherence

To deserve the name of system, all units should be *coherent*. That is to say, the primary unit of every derived quantity should be defined in terms of unit amount of each fundamental quantity involved. If one of the fundamental quantities is mass, then the coherent unit of force must be that required to accelerate *unit* mass at the rate of *unit* length per *unit* time per *unit* time. In the c.g.s. version of the metric system this is true of its unit of force—the dyne. And so it is in the m.k.s. version, whose unit of force is the newton. But what about our own f.p.s. (foot-pound-second) system? A mechanical engineer reckons pressure in pounds per square inch. In this use of the word "pound" he obviously doesn't mean mass, for that would be nonsense. Pressure is *force* per unit area. So in this context a pound is the force of gravity on a mass of a pound. Since the force of gravity depends on the position of the mass in relation to the body attracting it—the earth—and is not the same even at sea level everywhere, the pound force has no precise meaning unless a figure is given for the rate of gravitational acceleration. The agreed figure in feet/sec is 32.1740.

So two possibilities exist for a coherent f.p.s. system. The pound can be the unit of mass, in which case the unit of force is that which would be needed to accelerate a pound at the rate of 1 ft/sec. As force is proportional to acceleration, such a unit force is 1/32.174 of a pound weight (which as we have just seen is deemed to accelerate a pound mass at 32.174 sec<sup>2</sup>). This coherent unit is called a poundal, and no very abstruse calculation is needed to show that it is equal to just under half an ounce weight at the presumed standard sea level. Or the pound can be the unit of weight (in its true sense, which is force). In which case the coherent unit of mass is equal to 32.174 pounds mass, because the force of a pound applied to it would accelerate it at 1 ft/sec. Again, this unit has been given a name—the slug.

With our unrivalled British capacity for muddle, we not only legally define the pound as a unit of weight when mass is meant, but we reject both of the above legitimate systems in favour of a strange mixture of the two, in which "pound" sometimes means one thing and sometimes another 32.174 times larger or smaller. To call this a *system* is downright flattery.

For completeness of information, we note that *g*, the presumed acceleration due to gravity, is 980.665 cm/sec in the c.g.s. system and 9.80665 m/sec in the m.k.s. system, so the dyne is just over one milligramme weight and the newton is just over one tenth of a kilogramme weight and therefore equal to 10<sup>5</sup> dynes.

The value of a coherent system of units is not just that it sounds better than an incoherent one; it has the great value that all the equations that state relationships between physical quantities can be used for computations without having to think about units or bring in constants to allow for them. For example, the equation for kinetic energy

*E* in terms of mass *m* and velocity *v* is

$$E = \frac{1}{2} mv^2 \dots \dots \dots (1)$$

This does not depend on units, so long as they are coherent. The  $\frac{1}{2}$  is not a constant needed to express the result in a particular unit, but arises from the physics of the thing. So if *m* is in pounds and *v* in ft/sec, *E* is in the corresponding coherent unit of energy, the foot-poundal. But if you want it in foot-pounds (force) you have to divide the result by the constant *g*, 32.174; or (what is the same thing) modify the equation to

$$E = \frac{1}{2} mgv^2 \dots \dots \dots (2)$$

Obviously there is much less risk of error or confusion if each physical-law equation always appears in only one form. Equation (2) can rightly be objected to because *g* is being used as just a number—a unit-conversion constant—whereas it really has the dimensions of an acceleration and so makes the equation false dimensionally. If one were making a check—as one should—by seeing that the dimensions in terms of M, L and T (length, mass and time) were the same on both sides, one would find (2) wrong.

A criticism brought against the m.k.s. system (and SI) is that one doesn't (for example) want to measure the cross-sectional areas of pickup magnets in square metres. And if centimetres are used instead then the system ceases to be coherent. But this is not so if the prefix "centi" is regarded as part of the arithmetical amount to be filled into the relevant equations. For example, for "2 cm<sup>2</sup>" you would write "2 × 10<sup>-4</sup>m<sup>2</sup>."

All the same, I suppose it would have to be admitted that on the whole the sort of quantities we use are a little more easily expressed in centimetres and grammes than in metres and kilogrammes. That being so, the onus was on advocates of m.k.s. to show why c.g.s. should not continue to be used.

That would have been difficult to do in pre-electrical days. But not now. When units of electricity and magnetism were first defined, the c.g.s. system was universally used for scientific purposes, so naturally it was extended to include the new quantities. The system for electrical units was based on the law of attraction between opposite electric charges, and the system for magnetic units on the law of attraction between (non-existent) opposite magnetic poles. Because of the relationships between electricity and magnetism, both systems of units could be and were extended to include all electric and magnetic quantities, and so there were two alternative c.g.s. units for each.

### Dimensions

Now we have already had something to say about the "dimensions" of physical quantities. For example, because of physical laws, force has the dimensions mass × acceleration, and acceleration in terms of the fundamental quantities is length/time<sup>2</sup>. So we say the dimensions of force are ML/T<sup>2</sup>. Anything that a force is equal to must have these dimensions, or something is wrong. The law of the force *F* between two electric charges *Q*<sub>1</sub> and *Q*<sub>2</sub> concentrated at points separated by distance *r* is

$$F = k \frac{Q_1 Q_2}{\epsilon r^2} \dots \dots \dots (3)$$

where *k* is a constant depending on the system of units and  $\epsilon$  is the permittivity of the medium. So the electrostatic c.g.s. unit of charge is defined as that which spaced 1 cm from an equal and opposite charge in a vacuum is attracted with a force of 1 dyne, *k* and  $\epsilon$  both being regarded as 1. The dimensions of charge are therefore the square root of (force × length<sup>2</sup>), or L<sup>1/2</sup> M<sup>1/2</sup> T<sup>-1</sup>. The electromagnetic c.g.s. unit of charge, on the other hand, turns out to have the dimensions L<sup>3/2</sup> M<sup>1/2</sup>. But this is nonsensical! The ratio

of two quantities of the same kind *must* be a pure number, with no dimensions. But the ratio of any amount of electric charge in e.s.u. to the same amount in e.m.u. is

$$\frac{L^{\frac{1}{2}}M^{\frac{1}{2}}T^{-1}}{L^{\frac{1}{2}}M^{\frac{1}{2}}T^{-1}} = \frac{L}{L}$$

which of course is a velocity.

Do the same for any electric or magnetic quantity and you always get a velocity, or the square of a velocity. And always the same velocity— $2.99792 \times 10^{10}$  cm/sec, which of course is the velocity of electromagnetic waves through space.

The fallacy responsible for the absurdity mentioned above was the assumption that  $\epsilon$  was a pure number (1); and the same for  $\mu$  in the magnetic case. Now nobody knows what the dimensions of  $\epsilon$  and are  $\mu$ , but we do know that  $1/\sqrt{\epsilon\mu}$  has the dimensions of velocity. Nor can the magnitudes of  $\epsilon$  and  $\mu$  both be made 1 (while retaining the second as the unit of time) other than by making our unit of length equal to  $2.99792 \times 10^{10}$  cm, which would hardly be a popular move.

What it all boils down to is that electrical and magnetic quantities can't be expressed in terms of the three fundamental (or any other) mechanical quantities, but need at least one electromagnetic quantity. Any one would do, but for convenience it has been decided internationally that it should be electric current.

Besides being fundamentally unsound, as we have seen, both of the c.g.s. systems were highly inconvenient in that their units were quite different from those in practical use, such as volts, amperes and ohms. Most of them were much too small or too large; for example, the e.m.u. unit of e.m.f. was equal to one hundredth of a microvolt, and unit capacitance was one thousand million farads. By making the four fundamental units the metre, kilogramme, second and ampere, all the coherent units of electricity and magnetism are the same as those in general use. And, incidentally, the units of force and of energy and work are of more convenient size than the dyne and erg. In particular, the unit of energy and work is the

same for mechanical and electrical work—the watt-second, or joule. The only inconvenience is that the values of  $\epsilon$  and  $\mu$  in space are not 1.


On the whole, however, this m.k.s.A. system is both sound and convenient, and the sooner all others are consigned to past history the better. The c.g.s. systems are rapidly moving in that direction, as well they might!

We have admittedly been taking rather a self-centred electrical view of things—not without some justification in view of the electrical constitution of all things. But even the strictly mechanical engineer can hardly fail to benefit from at least one by-product of the adoption of what is basically the m.k.s.A. system—the replacement of 15 different units of heat, all called the *calorie*, by one already well-established—the joule. Heat is now defined in electrical terms.

Temperature *could* be defined in terms of the same four fundamental quantities, but for convenience the degree Kelvin has been made a fifth quantity in the SI. To bring units of light into it, the unit of luminous intensity, the candela, is a sixth. So what we now have is an m.k.s.A.°K.cd system, SI for short. The SI agreement includes several changes besides the abolition of separate heat units. The standard metre is no longer a metal bar but 1,650,763.73 wavelengths *in vacuo* of a certain radiation from the gas krypton. The second is also being re-defined in atomic terms, as a number or cycles of a certain transition of caesium. The only one of the original three standards to remain is the kilogramme, kept at Sèvres in France. Greater precision could be obtained by specifying it as the number of atoms of a given element, but counting them with available facilities would be rather laborious. Before that becomes practicable, no doubt the ampere will be re-defined as a number of electrons per second, instead of the force between two conductors carrying it.

May I suggest that, without waiting for these or any other developments, all readers who have not already done so accustom themselves to the use of SI?

## H. F. PREDICTIONS—JANUARY

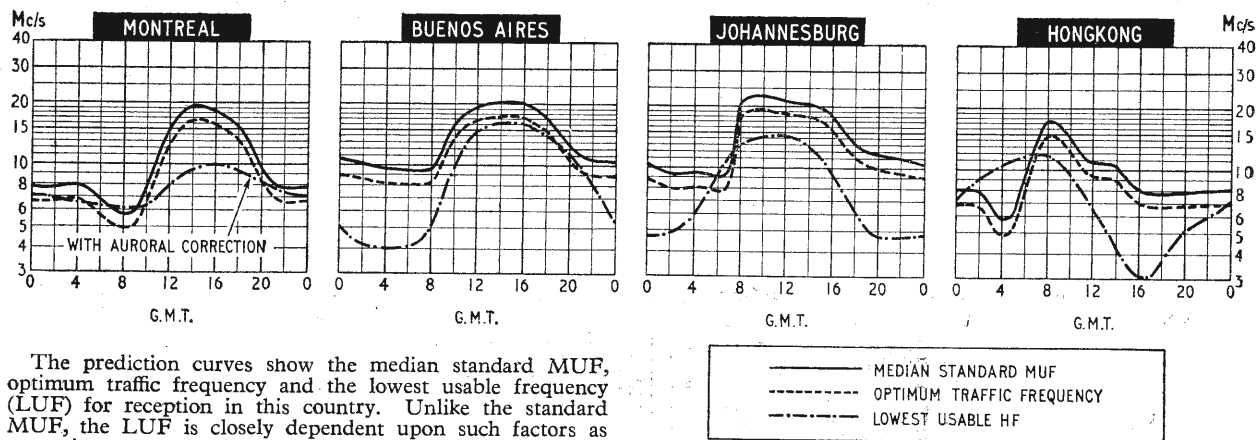

The prediction curves show the median standard MUF, optimum traffic frequency and the lowest usable frequency (LUF) for reception in this country. Unlike the standard MUF, the LUF is closely dependent upon such factors as transmitter power, aeriels, and the type of modulation. The LUF curves shown are those drawn by Cable & Wireless Ltd. for commercial telegraphy and assume the use of transmitter power of several kilowatts and rhombic type aeriels.

The Zurich sunspot number predicted for November was 6

but it was actually 6.9. The predicted numbers for December to May inclusive, *i.e.* 6, 6, 7, 7, 8, 9, respectively, suggest that the sunspot minimum has past. A steady rise would now be expected over the next few years.



# WORLD OF WIRELESS

## U.K. Radio Shows

SINCE the closing of the last National Radio Show at Earls Court, which was attended by over 200,000 fewer than the previous exhibition two years earlier, there have been frequent discussions on the future of the London show. Should it be biennial? Should it be international? Should it become a purely trade show? etc. Before B.R.E.M.A., the sponsors, had made up their minds the Thomson Organization announced that they were to hold an international radio show in Newcastle to coincide with the annual Tyneside Summer Exhibition in the first week in August. (The date has subsequently been changed to August 17th-21st.)

Within a few days of this announcement Industrial & Trade Fairs announced that they had taken over the promotion and organization of annual radio and television exhibitions at Earls Court. These would be international and would replace those formerly run by B.R.E.M.A. who had options on dates for several years. It is understood that other trade associations will be invited to participate in the show which it is intended to broaden to cover other forms of home entertainment. The first of this new series of shows will run from August 25th-September 4th.

The opening of the doors of the London show to overseas manufacturers may mean that the organizers of the German show—to be in Stuttgart this year—will reciprocate. In the past they have offered to do this if we in the U.K. did likewise.

Will the introduction of international shows mean the disappearance of the plethora of trade shows staged by individual manufacturers and importers coincident with the London Show?

## Royal Society

AS a result, in part, of a recommendation by an *ad hoc* committee set up last year "to consider what action the Royal Society might take . . . to heighten the esteem of the technologist as a scientific contributor to the national welfare" the number of annual elections of Fellows is to be increased from 25 to 32. The intention is that a substantial number of the new places should be given to applied scientists on both the physical and biological sides.

In the report of the committee on scientific research in schools issued by the Society details are given of some 100 research projects being undertaken by science teachers. These include an investigation of radio emission from sunspots (Bradford Grammar Sch.); radio communication on 430 Mc/s by reflection from the moon (Canford School, Wimborne); the measurement of ionospheric drifts (Tregaron County Secondary Sch.); construction of a 200 Mc/s radio telescope (Gordonstoun Sch.) and radio astronomy (Westminster Sch.).

## Quality of Instruments

A CONFERENCE on the performance and quality of instruments, organized by the Scientific Instrument Manufacturers' Association recently, discussed how far criticisms of British instruments were justified, how to ensure that they are capable of meeting the users' requirements, and how to sell more overseas.

Points that came to light included the need for the pooling of information from the field engineers and servicing establishments and feeding it back to the design teams to help improve the reliability of later designs; more fundamental analysis of unnecessary cost (*i.e.* cost that provides neither better quality, nor extended use, nor improved life); the implications of changing to the metric system; cheap and quick evaluation of instruments; and extending the existing calibration facilities now available to the industry.

Dr. J. V. Dunworth, acting director of the National Physical Laboratory, discussed the scheme for establishing calibration centres under the auspices of the N.P.L.



**Mullard Award of the Radio Society of Great Britain** being received by James Illingworth (right), a blind amateur transmitter (G3EPL) of St. Bees, Cumberland. The award of books or apparatus to the value of £25 is donated by Mullard and is given to an R.S.G.B. member who has, through the medium of amateur radio, rendered outstanding personal service to the community by his own endeavours or by his example of fortitude and courage.

**I.E.R.E.**—As already announced, the new president of the Institution of Electronic and Radio Engineers is Colonel G. W. Raby. The Institution's new vice-presidents are R. H. Garner, principal of Coatbridge Technical College; Major General B. D. Kapur, until recently controller of defence research and development in India's Ministry of Defence; H. F. Schwarz, managing director of Decca Navigator; and Professor Emrys Williams, of University College of South Wales and Monmouthshire. New members of the Council are: R. J. Cox (Atomic Energy Establishment, Winfrith); T. A. Cross (Redifon); Rear-Admiral C. R. Darlington (Ministry of Defence); Professor W. A. Gambling (University of Southampton); N. L. Garlick (Brighton College of Technology) and M. James (Industrial Electronics Division in the U.K. of International G.E. Company).

Among the nine premiums awarded at the annual meeting of the I.E.R.E. was a new one—the **J. Langham Thompson Premium**—endowed by Mr. Thompson, the retiring president, for "the outstanding paper in the field of control engineering." The first recipients of the 30gn award were G. B. Cole and S. L. H. Clarke, both of Elliott Process Automation Ltd., for their joint paper "The development of ARCH—a hybrid analogue-digital system for computers for industrial control." The Institution has announced a further award which has been endowed by Radio Rentals Ltd. to commemorate their founder P. Perring-Thoms. It will be presented annually for the most outstanding contribution on improved methods of television reception.

**B.K.S.T.S.**—Since the merger a few months ago of the British Sound Recording Association with the British Kinematograph Society there have been several attempts to find a new "all embracing" title. It has now been decided to register the name British Kinematograph Sound and Television Society.

**R.T.E.B. and S.E.R.T.**—Since the formation of the Radio Trades Examination Board in 1942 secretarial assistance has been provided by the Institution of Electronic and Radio Engineers at its offices at 9 Bedford Square, London, W.C.1. With the expansion of the Board's activities and the establishment of the Society Electronic and Radio Technicians, these two organizations have moved to 33 Bedford Street, London, W.C.2. The telephone numbers are COVent Garden 0926 (R.T.E.B.) and 1152 (S.E.R.T.). As announced elsewhere in this issue, A. J. Kenward is now secretary of both organizations.

**I.E.R.E. Membership.**—The Report of the Institution of Electronic and Radio Engineers for the year ended last March, which was presented at the a.g.m. on December 9th, records a net gain in membership of 832 during the year bringing the total to 9,531. Just under a third of the total (3,100) are graduates and another 2,800 associate members.

A total of some 300 exhibitors have already booked space for the **Radio & Electronic Component Show** to be held at Olympia, London, from May 18th to 21st. This is almost a 20% increase on the 1963 figure. Sponsored by the Radio & Electronic Component Manufacturers' Federation, it is organized by Industrial Exhibitions Ltd.

**I.E.A. 1966.**—The dates of the next International Instruments, Electronics and Automation Exhibition—May 23rd-28th, 1966—have been announced by the organizers, Industrial Exhibitions Ltd., 9 Argyll Street, London, W.1. The biennial exhibition is sponsored by the British Electrical and Allied Manfrs' Assoc., Radio and Electronic Component Manfrs' Fed., British Industrial Measuring and Control Apparatus Manfrs' Assoc., Electrical Engineering Assoc. and Scientific Instrument Manfrs' Assoc.

**Television for Barbados.**—The Caribbean Broadcasting Corporation's first television station was brought into service on December 15th. The 625-line station is located in Bridgetown, Barbados. The channel width is 6 Mc/s. Studio equipment, including 4½-in image-orthicon cameras and telecine units, was supplied by Pye T.V.T.

**Pakistan's first television station**, built in the West Pakistan capital of Lahore, was inaugurated by the president on November 26th. A second station is opening soon in Dacca, the eastern capital. Both transmitters, which operate on the 625-line 7 Mc/s standard, were supplied by Nippon Electric Company of Japan.

A joint I.E.R.E.-I.E.E. symposium on **microwave applications of semiconductors** is to be held at University College, London, from June 30th to July 2nd.

**Microwave Behaviour.**—An international conference on the microwave behaviour of ferrimagnetics and plasmas is being organized for next September by the I.E.E. in collaboration with the I.E.R.E., the U.K. Section of the I.E.E.E. and the Inst. Phys. & Phys. Soc. It will be held at the I.E.E. headquarters, Savoy Place, London, W.C.2.

**Electronics Design.**—A two-day conference on the design of electronic equipment, covering the commercial, manufacturing, aesthetic and ergonomic aspects as well as those concerned with technical performance, is being organized by the Electronics Division of the I.E.E. for 8th and 9th February at Savoy Place, London, W.C.2. Registration forms are obtainable from the Institution at the above address.

**Correction.**—In line 23, r.h. column, page 614 of R. B. C. Copey's article in the December 1964 issue on a transistor f.s.k. oscillator, the second term of the expression for the input to Tr3 should be the same as in eqn. (1) with index  $j\theta$ , not  $j2\theta$ .



The commemoration stamp issued on December 15th by the United States Post Office to mark the 50th anniversary of the founding of the American Radio Relay League. A specially designed envelope bearing a reproduction of the first cover of the League's journal QST was used for first day cancellations.

**Engineering scholarships** combining undergraduate and post-graduate education are announced by the English Electric group of companies. The scholarships will include awards of £550 a year for three years to undergraduates following a course leading to an honours degree in mechanical engineering, electrical engineering, electronics, production engineering or some other related applied science. For those who have completed a year's practical training with the company and have a 1st- or 2nd-class honours degree, awards to the value of £825 a year will be available.

A course of twelve weekly lectures on **microwave applications of semiconductors** begins at the Borough Polytechnic, Borough Road, London, S.E.1, on January 12th (fee 50s). Incidentally, proposals for the erection of a major extension to the college, providing an extra 140,000 sq ft of accommodation, have been approved. This would more than double the existing space.

Three courses, each of two weeks' duration, to "provide a deeper insight into the circuit techniques, applications and maintenance procedures" of **Tektronix instruments** and their sampling and digital systems, are being arranged by Tektronix Ltd. at their Guernsey, Channel Islands, training department. Each course is repeated at intervals of approximately a month. They start in January. Details of the courses, which are free but travel and accommodation have to be paid for, are obtainable from J. Thompson, Tektronix U.K. Ltd., Beaverton House, Station Approach, Harpenden, Herts.

An evening course of 12 lectures on **statistical signal theory** begins at the Brunel College, London, W.3, on January 12th. It is intended for engineers and scientists who already have a basic knowledge of information theory. (Fee 2 gn.)

A course of six Tuesday evening lectures in **radar technology**, commencing February 2nd, are to be held at the Norwood Technical College, Knight's Hill, London, S.E.27. (Fee 15s.)

Two courses, each of 12 weekly lectures, start at the **Northern Polytechnic**, London, N.7, on January 14th. In the afternoon there will be a course on printed circuit techniques (fee £2) and in the evening one on basic microwave techniques (fee £1). A course of 14 lectures on the principles of modern network theory, with an introduction to synthesis, starts on January 15th (fee 30s).

A course of 11 weekly evening lectures providing an introduction to the theory and application of **lasers, masers and parametric amplifiers**, begins at the Twickenham College of Technology, Egerton Road, Twickenham, Middx., on January 15th. (Fee 55s.)

At the presentation of prizes to apprentices at the Marconi Company's works at Chelmsford on December 4th the education and training officer announced that 738 apprentices are at present in training. Of this number 380 are craftsmen, 157 technicians, 143 students and 58 graduates. Apprentices' successes in the various exams for degrees, diplomas and certificates reached the high level of 78% during the past year.

**Automatic Control.**—London is to be the venue of the third congress of the International Federation of Automatic Control which is to be held from June 20th-25th, 1966. Organization is in the hands of the U.K. Automation Council, c/o I.E.E., Savoy Place, London, W.C.2.

The Society of Environmental Engineers is planning to hold its second symposium and exhibition in London in April 1966.

A twenty-minute colour film entitled "Solder Glass Technique" is now available for hire from the Central Film Library, Industrial Section, Government Building, Bromyard Avenue, Acton, London, W.3. Professor King, of the M.I.T. of America, demonstrates a simple method of producing inexpensive vacuum tube devices for experimental use from ordinary soft glass tubing and solder glass.

Three new pamphlets in the series "Educational Electronic Experiments" are available from the Mullard Educational Service, Mullard House, Torrington Place, London, W.C.1. The first of these—number eight in the series—deals with the construction of a low-voltage electrometer which is particularly suitable for all pH measurements. Number nine describes the construction of a decade scaler which has a maximum count rate of 400 c/s and will accept and count most standard waveforms. A method of making Hall effect measurements is described in pamphlet ten and samples of semiconductor wafers for this purpose are available from the Educational Service. No charge is made to schools and other educational establishments for these pamphlets. Although not in the Electronic Experiments series, a list of elements giving atomic number and weight, electron shell dispositions, periodic group and neutron complement is available from the Educational Service.

**ESTEC**—the European Space Technology Centre—at present operating from buildings belonging to the Technical University of Delft, is to set up its own establishment a few kilometres south of Noordwijk. This decision was announced by the Council of ESTEC at its meeting on the 22nd October attended by delegates from all nine member countries:—Belgium, Denmark, Federal Republic of Germany, France, Netherlands, Spain, Sweden, Switzerland and U.K.

## PERSONALITIES

**Sir Robert Renwick, Bt., K.B.E.**, who was appointed a baron in the Honours List on the dissolution of Parliament, is chairman of Associated Electrical Industries, Associated Television, British Relay and the British Space Development Corporation. During the last war Sir Robert was closely associated with the development of radar by virtue of the positions he held in the Supply and Air Ministries. For the past ten years he has been president of the Radar & Electronics Association.

**Walter Bruch**, who developed the PAL television system, has been appointed an honorary doctor of engineering by the Hanover Technical University "for his excellent scientific achievements in the domain of colour television." Dr.-Ing. Bruch, who is 56, joined the television and physical research department of Telefunken in 1935. After the war he ran his own laboratory in Berlin for four years but returned to Telefunken in 1950. He is a member of the *ad hoc* colour television group of the European Broadcasting Union and of Study Group XI (television) of the C.C.I.R.

**E. L. C. White, Ph.D., M.A., M.I.E.E.**, for the past three years in charge of military projects research for EMI Electronics, has been appointed chief scientist. Dr. White joined EMI Research Laboratories in 1933 and was a member of the team led by the late Sir Isaac Shoenberg which developed the 405-line television system. During

the war he was engaged on radar development and subsequently on the design of television cameras. In his new position he will be responsible for the



Dr. E. L. C. White

technical executive duties hitherto carried out by the technical director, **Arthur H. Cooper, C.B.E., B.Sc.**, who has left the country to become a director of the recently formed EMI Electronics (Australia) Pty., Ltd. Mr. Cooper, who is 60 and is a graduate of King's College, London, was in the research laboratories of the G.E.C. and then the B.B.C. before joining the Gramophone Company (now part of EMI) in 1929. He was appointed head of advanced development of EMI in 1932 and was in charge of the work on proximity fuses. He has been technical director of EMI Electronics since 1956.

**Captain J. W. G. James, O.B.E., F.R.Ae.S., M.Inst.P.**, who has been in flight operations and communications director of British European Airways since 1952, has been appointed a full-time member of the board of B.E.A. for a period of five years from December 1st.

**J. G. Thompson, Assoc.I.E.E.**, director of telecommunications, Singapore, for the past two years has resigned to take up an appointment with the International Civil Aviation Organization and will be seconded to the government of Libya as senior radio engineer. Mr. Thompson, who is 42, served in the R.A.F. Signals Branch during the war and in 1946 was seconded to the Forces Broadcasting Service. He left the R.A.F. in 1950 but remained with F.B.S. in a civilian capacity to become senior technical officer, Middle East. A year later he joined the Government Telecommunications Department, Singapore, and after serving as engineer-in-charge of radio transmitting and receiving stations was controller of the Radio Branch from 1960 until his appointment as director of telecommunications in 1962.

**R. W. Beattie**, manager of the capacitor division of the Telephone Manufacturing Company, Ltd., has been appointed an executive director. As divisional manager, Mr. Beattie is responsible for all aspects of production, sales and engineering of T.M.C.'s capacitor division.

**Colonel E. N. Elford, O.B.E., T.D., A.M.I.E.E.**, has retired from Marconi's after 27 years' service. He was manager of the company's radar division from 1948 until 1960 when he was appointed consultant to the managing director, particularly in the defence field. Col. Elford originally joined Marconi's as an unpaid trainee in 1915 but left to join the Regular Army in 1917. He was commissioned in the Royal Artillery but invalided out and resumed his career in the radio industry. He rejoined the Marconi Company in 1937 but as a Territorial Army officer was recalled at the outbreak of war in 1939. He returned to Chelmsford in 1945 and was instrumental in the formation of what is now the radar division.

**H. Stephen Marmorek, M.A.**, who graduated at Cambridge University and following service in the Second World War as a captain in R.E.M.E. went to North America, has become president of Sprague-TCC (Canada) Ltd. This is the joint Canadian subsidiary of the Telegraph Condenser Company, of London, and the Sprague Electric Company, of North Adams, Mass. Mr. Marmorek was for some years works manager of Radio Engineering & Products Ltd., of Montreal.

The recently appointed director of technical costings in the Ministry of Aviation is **H. E. Drew, M.I.E.R.E.**, and not E. C. Drew as stated in error last month. Mr. Drew joined Sir Robert Watson-Watt's staff at the Bawdsey Research Station in 1938 after 14 years in the R.A.F. In 1946 he became a member of the headquarters staff of the Ministry of Supply's Directorate of Radio Production. He was director of electronics production (air) from 1959 until his new appointment on October 1.

**G. Caldwell, B.Sc., A.M.I.E.E.**, is to be the new head of the Department of Electrical Engineering in the Borough Polytechnic, London, S.E.1, from January 1st in succession to **V. P. Mendoza, M.Sc. Tech., M.I.E.E.**, who was recently appointed vice-principal. Mr. Caldwell, who is 44 and is a graduate of the University of Manchester, has been head of the Department of Electrical Engineering at the Oxford College of Technology. He has also been a member of the academic staff of the Loughborough College of Technology and was for some time principal of the Apprentice Training School of the U.K. Atomic Energy Authority at Harwell.

**R. A. King, M.A., A.M.I.E.E.**, lecturer in the electrical engineering department of Imperial College, London, has been seconded for three years to the Indian Institute of Technology, Delhi, as professor of electrical engineering (control engineering).

**Colonel E. Holland, B.Sc.(Eng.), A.M.I.Mech.E., A.M.I.E.E., R.E.M.E.**, assistant director electrical and mechanical engineering in the Ministry of Defence since April, 1963, has been appointed director of electrical inspection in the Ministry of Aviation in succession to E. D. Whitehead who is now director of electronics production (radar). Col. Holland has been granted the rank of Brigadier.

**G. D. Clifford, C.M.G.**, secretary of the Institute of Electronic and Radio Engineers which he joined in 1937, is retiring from the post of secretary of the Radio Traders Examination Board he has held since the formation of the Board of which the I.E.R.E. is one of the four sponsoring bodies. **A. J. Kenward, B.Sc., A.M.I.E.R.E.**, who is a graduate of London University and has been education officer of the I.E.R.E. since 1948, is being released to become secretary of the R.T.E.B. and of the recently formed Society of Electronic and Radio Technicians.

**G. N. Patchett, B.Sc.(Eng.), Ph.D., M.I.E.E., M.I.E.R.E.**, who has been head of the Electrical Engineering Department of Bradford Institute of Technology for the past 12 years, has been appointed a professor of electrical engineering in the proposed University of Bradford. Dr. Patchett has been on the staff of the College since 1940 when he joined to teach Servicemen radio. He received his own academic training at the College where he graduated B.Sc. (electrical engineering). He received his Ph.D. from London University in 1946.

**W. F. Lovering, M.Sc., M.I.E.E.**, head of the Electrical Engineering Department of Battersea College of Advanced Technology, London, has been appointed to the chair of electrical and control engineering. This is one of several appointments to personal chairs in anticipation of the granting of university status to the college. Mr. Lovering, who is 51 and a graduate of Birmingham University, was in industry (Ferranti, G.E.C. and Stratton) for some years before joining the staff of Nottingham University as a lecturer. He subsequently served on the staff of the University of New South Wales, Australia, and of Imperial College, London.

**William A. Gambling, Ph.D., B.Sc. (Eng.), A.M.I.E.E.**, senior lecturer in the Department of Electronics at Southampton University until his appointment a year ago as reader in electronics, has now been appointed to the University's second chair of electronics. The incumbent of the other chair is Dr. Geoffrey D. Sims who succeeded to the professorship on the retirement of Dr. E. E. Zepler a year ago.

The Copley Medal of the Royal Society has been awarded to **Professor S. Chapman, F.R.S.**, advisory scientific director of the Geophysical Institute, University of Alaska, for his theoretical contributions to terrestrial and interplanetary magnetism, the study of the ionosphere and of the aurora borealis.

## OUR AUTHORS

**J. L. Storr-Best, B.Sc.(Eng.), A.M.I.E.E.**, author of the article on miniature selenium rectifiers for television e.h.t. in this issue, obtained a First Class Honours degree of London University at Brighton Technical College. From 1940 until 1959 he worked in the Radio Division of Standard Telephones & Cables at New Southgate. In 1959 he became head of the laboratory designing digital transistor circuits for electronic telegraph switching equipment. Since February, 1963, he has been chief applications engineer for the Rectifier Division of S.T.C. at Harlow.

**M. D. A. B. Rackowe, B.A.**, contributor of the article on page 24, graduated in the mechanical sciences tripos at Pembroke College, Cambridge. He then spent a year with English Electric Aviation working on guided weapon control circuitry after which he joined Everett Edgcombe & Co. where he was concerned mainly with the development of a.c. and d.c. amplifiers. From January, 1963, until last June he was with AMF British Research Laboratory, Reading, and is now with Coutant Electronics, of Reading. He is 28.

## OBITUARY

**Charles Samuel Franklin, C.B.E., M.I.E.E.**, who died on December 10th at the age of 85, will always be honoured for the prominent part he played in the creation of beam wireless, although at the time of his retirement from the Marconi company in 1939 he modestly pointed out that "beamed" short-wave transmission is as old as wireless itself. After extensive experiments, both in this country and abroad, an aerial with a large reflector was erected at Poldhu, Cornwall, and its transmissions on 100 metres and below were received on Marconi's yacht *Elettra* in various parts of the world. Having proved the value of beamed short-wave communication a contract was obtained from the Post Office in 1925 for a number of stations. Franklin was one of the original band of engineers who joined the Marconi company on its formation in 1899 and is perhaps best known as the originator of the high-stability oscillator bearing his name. In 1949 he received the Faraday Medal of the I.E.E. for "his distinguished work in radio engineering, and more particularly for his development of the beam aerial and other devices that made long-range h.f. communication a practical possibility."

# CONFERENCES AND EXHIBITIONS

Latest information on events during 1965 both in the U.K. and abroad is given below.  
Further details are obtainable from the addresses in parentheses.

## LONDON

- Feb. 8-9 Savoy Place  
**Conference on Electronics Design**  
(I.E.E., Savoy Place, W.C.2)
- Feb. 26 Savoy Place  
**Cryogenics in Relation to Vacuum**  
(Inst. Phys. & Phys. Soc., 47 Belgrave Sq., S.W.1)
- Mar. 17-18 Kings Head, Harrow  
**Public Address Exhibition**  
(A.P.A.E., 394 Northolt Rd., South Harrow, Middx.)
- Mar. 29-Apr. 2 Earls Court  
**LABEX—Laboratory Apparatus & Materials Exhibition**  
(Scientific Instrument Manfrs. Assoc., 20 Peel St., W.8)
- Apr. 21-30 Olympia & Earls Court  
**International Engineering Exhibition**  
(F. W. Bridges & Sons, 1-19 New Oxford St., W.C.1)
- Apr. 22-25 Hotel Russell  
**International Audio Festival & Fair**  
(C. Rex-Hassan, 42 Manchester St., W.1)
- May 17-21 Savoy Place  
**Components & Materials in Electronics Engineering**  
(I.E.E., Savoy Place, W.C.2)
- May 18-21 Olympia  
**Component Show**  
(R.E.C.M.F., 21 Tothill St., S.W.1)
- May 20-21 R.Ac.S., Hamilton Place, W.1  
**Electrical Conduction at Low Temperatures**  
(Inst. Phys. & Phys. Soc., 47 Belgrave Sq., S.W.1)
- June 16-26 Olympia  
**Interplas Plastics Exhibition**  
(British Plastics, Dorset House, Stamford St., S.E.1)
- Aug. 25-Sept. 4 Earls Court  
**Radio Show**  
(Industrial & Trade Fairs, 1-19 New Oxford St., W.C.1)
- Sept. 13-17 Savoy Place  
**Microwave Behaviour of Ferrimagnetics & Plasmas**  
(I.E.E., Savoy Place, W.C.2)
- Sept. 20-24 Savoy Place  
**Thermionic Electrical Power Generation**  
(I.E.E., Savoy Place, W.C.2)
- Oct. 27-30 Seymour Hall  
**R.S.G.B. Radio Communications Show**  
(P. A. Thorogood, 35 Gibbs Green, Edgware, Middx.)

## BIRMINGHAM

- Apr. 5-7 The University  
**Conference on Elementary Particles**  
(Inst. Phys. & Phys. Soc., 47 Belgrave Sq., S.W.1)

## BRIGHTON

- Sept. 28-Oct. 1 Hotel Metropole  
**European Medical Electronics Symposium & Show**  
(Symposium Secretary, 4 Mill Street, W.1)

## BRISTOL

- Jan. 5-8 The University  
**Conference on Solid State Physics**  
(Inst. Phys. & Phys. Soc., 47 Belgrave Sq., S.W.1)
- Apr. 7-9 The University  
**Stress Analysis Conference**  
(Inst. Phys. & Phys. Soc., 47 Belgrave Sq., S.W.1)

## CAMBRIDGE

- Mar. 31-Apr. 2 The University  
**Non-Conventional Electron Microscopy**  
(Inst. Phys. & Phys. Soc., 47 Belgrave Sq., S.W.1)
- Sept. 1-7  
**British Association Meeting**  
(British Assoc., 3 Sanctuary Bldgs., Great Smith St., S.W.1)

## LIVERPOOL

- Sept. 15-17 The University  
**Nuclear and Particle Physics**  
(Inst. Phys. & Phys. Soc., 47 Belgrave Sq., S.W.1)

## MANCHESTER

- Apr. 5-8 Col. of Science & Tech.  
**Physics Exhibition**  
(Inst. Phys. & Phys. Soc., 47 Belgrave Sq., S.W.1)
- Sept. 7-9 The University  
**Internal Friction in Solids**  
(Inst. Phys. & Phys. Soc., 47 Belgrave Sq., S.W.1)

## NEWCASTLE

- Aug. 17-21 Town Moor  
**International Radio Show**  
(Thomson Organisation, 200 Gray's Inn Rd., W.C.1)

## NOTTINGHAM

- Apr. 6-9 The University  
**Automatic Control Convention**  
(I. Mech. E., 1 Birdcage Walk, S.W.1)

## SCARBOROUGH

- May 23-27 Royal Hotel  
**R.T.R.A. Annual Conference**  
(Radio & Television Retailers' Assoc., 19 Conway St., W.1)

## OVERSEAS

- Jan. 12-14 Miami Beach  
**Reliability and Quality Control**  
(R. Brewer, Mullard Southampton Works, Southampton, Hants.)
- Feb. 3-5 Los Angeles  
**Military Electronics Convention**  
(Dr. R. Ashby, North American Aviation, 3370 Miraloma Ave., Anaheim, Cal.)
- Feb. 17-19 Philadelphia  
**Solid State Circuits Conference**  
(Lewis Winner, 152 W. 42nd St., New York, N.Y.)
- Feb. 28-Mar. 9 Leipzig  
**Leipzig Fair**  
(Leipziger Messeamf, Post Box 329, Leipzig)
- Mar. 10-12 Washington  
**Particle Accelerator Conference**  
(I.E.E.E., Box A, Lenox Hill Station, New York 21)
- Mar. 11-16 Paris  
**Festival of Sound**  
(F.M.I.E., 16 rue de Presles, Paris 15e)
- Mar. 22-26 Canberra  
**Australia and the Electronics World**  
(Institution of Radio and Electronics Engineers Australia, Box 3120, G.P.O., Sydney)
- Mar. 22-29 New York  
**International Convention**  
(I.E.E.E., Box A, Lenox Hill Station, New York 21)
- Mar. 23-26 Los Angeles  
**Audio Convention**  
(Audio Engineering Soc., P.O. Box 383 Maddison Sq. Station, New York.)
- Apr. 5-10 Paris  
**Symposium on Techniques of Memories**  
(Société Française d'Electroniciens et des Radioelectriciens, 10 avenue Pierre-Larousse, Malakoff)
- Apr. 8-13 Paris  
**Electronic Components Exhibition**  
(F.N.I.E., 16 rue de Presles, Paris 15e)
- Apr. 8-13 Paris  
**Audio Equipment Exhibition**  
(F.N.I.E., 16 rue de Presles, Paris 15e)
- Apr. 12-17 Los Angeles  
**Technical Conference**  
(S.M.P.T.E., 9 East 41st St., New York 17, N.Y.)
- Apr. 13-15 Houston  
**Telemetering Conference**  
(R. W. Towle, Advanced Technology Labs., 369 Whisman Rd., Mountain View, Cal.)

- Apr. 14-15  
**Electronics and Instrumentation Conference**  
(J. R. Ebbeler, Avco Corp., 2630 Glendale-Milford Rd., Cincinnati) Cincinnati
- Apr. 20-22  
**Symposium on System Theory**  
(Polytechnic Institute of Brooklyn, 333 Jay St., Brooklyn 1, N.Y.) New York
- Apr. 20-22  
**Frequency Control Symposium**  
(M. F. Timm, U.S. Army Electronics Labs., Fort Monmouth) Atlantic City
- Apr. 21-23  
**Optimization Techniques**  
(I.E.E.E., Box A, Lenox Hill Station, New York 21, N.Y.) Pittsburgh
- Apr. 21-23  
**Nonlinear Magnetics**  
(Dr. E. W. Pugh, IBM Building 703-2, Poughkeepsie, N.Y.) Washington
- Apr. 24-May 2  
**Hanover Fair**  
(Schenkers Ltd., 13 Finsbury Sq., London, E.C.2) Hanover
- May 5-7  
**Microwave Theory & Techniques**  
(J. E. Pippin, Sperry Microwave Electronics Corp., Box 1828, Clearway, Fla.) Clearway, Fla.
- May 6-8  
**Human Factors in Electronics**  
(I.E.E.E., Box A, Lenox Hill Station, New York 21, N.Y.) Boston
- May 10-12  
**Aerospace Electronics Conference**  
(NAECON, 1414 E. 3rd St., Dayton 2, Ohio) Dayton
- May 19-25  
**Electronic Exhibition**  
(Elvabe, Molenaalce 63A, Wilp, Gld., Netherlands) Amsterdam
- May 24-28  
**Television Symposium**  
(R. Jaussi, Postfach 97, Montreux, Switzerland) Montreux
- May 24-29  
**Information Processing Conference**  
(British Computer Soc., Finsbury Pavement, London, E.C.2) New York
- May 25-27  
**A.F.C.E.A. Annual Convention**  
(Armed Forces Communications & Electronics Assoc., 1725 Eye St., N.W., Washington, D.C.) Washington
- June 7-9  
**Communication Convention**  
(W. F. Ulant, N.B.S., Boulder, Colo.) Boulder
- June 20-24  
**Aerospace Conference**  
(T. B. Owen, 635 20th St., Santa Monica, Cal.) Houston
- June 22-25  
**Joint Automatic Control Conference**  
(Prof. J. W. Moore, University of Virginia, Charlottesville) Troy, N.Y.
- June-27-July 3  
**Navigation Congress**  
(British National Navigation Committee, c/o I.C.E., Gt. George St., London, S.W.1) Stockholm
- June 28-30  
**Electromagnetic Compatibility**  
(I.E.E.E., Box A, Lenox Hill Station, New York 21, N.Y.) New York
- June 28-July 2  
**Vacuum Congress**  
(Dr. H. Adam, 5 Köln-Bayental, West Germany, Postfach 195) Stuttgart
- Aug. 24-27  
**Western Electronics Show and Conference**  
(WESCON, 3600 Wilshire Blvd., Los Angeles, Cal.) San Francisco
- Aug. 25-Sept. 5  
**German Radio & TV Show**  
(Stuttgarter Ausstellungen—GmbH, Stuttgart, Postfach 990) Stuttgart
- Aug. 29-Sept. 3  
**Medical Electronics Conference**  
(Prof. K. Suhara, Tokyo University of Education, 26 Otsukakubomachi, Bunkyo-ku, Tokyo) Tokyo
- Aug. 30-Sept. 1  
**Antennas and Propagation**  
(Dr. R. J. Adams, Naval Research Lab., Washington D.C.) Washington
- Sept. 7-11  
**INEL—Industrial Electronics Exhibition**  
(Swiss Industries Fair, Postfach, Basle 21) Basle
- Sept. 7-14  
**International Congress on Acoustics**  
(5e Congrès International d'Acoustique, 35 rue Saint-Gilles, Liège, Belgium) Liège
- Sept. 14-Nov. 12  
**I.T.U. Plenipotentiary Conference**  
(International Telecom. Union, Place des Nations, Geneva) Montreux
- Sept. 17-Oct. 3  
**British Exhibition**  
(British Overseas Fairs, 21 Tothill St., London, S.W.1) Tokyo
- Sept. 22-24  
**Military Electronics Convention**  
(I.E.E.E., Box A, Lenox Hill Station, New York 21, N.Y.) Washington
- Sept. 27-Oct. 2  
**Technical Conference**  
(S.M.P.T.E., 9 East 41st St., New York 17, N.Y.) New York
- Oct. 4-6  
**Canadian Electronics Conference**  
(I.E.E.E., 1819 Yonge St., Toronto 7, Ontario) Toronto
- Oct. 7-12  
**Communication Congress**  
(I.C.C. Secretariat, c/o Civico Instituto Colombiana, Palazzo Tursi, Genoa) Genova
- Oct. 13-19  
**Interkama—Measuring Instruments & Automation**  
(J. Buck Ltd., 47 Brewer St., London, W.1.) Düsseldorf
- Oct. 25-27  
**National Electronics Conference**  
(N.E.C., 228 La Salle St., Chicago, Ill.) Chicago

## Books Received

**Transistor-Praktikum**, by Marcus Tuner. A light-hearted, but nevertheless sound introduction (in German) to the apparently nonsensical peculiarities of transistor techniques. Cartoons alternate with specific circuit details and the reader is quickly put in possession of the essential facts about the behaviour of transistors in practice. Pp. 64. Published for Graetz by Verlag F. W. Rubens, 475 Unna (Westf.), Germany. Price DM 3.80.

**Advances in Radio Research**, edited by Dr. J. A. Saxton. A new series of collected papers by recognized authorities in their subjects.

Vol. 1. Measurement of radio refractive index of the atmosphere, by A. W. Straiton. Tropospheric refraction and attenuation of radio waves in the troposphere, by B. R. Bean. Electromagnetic surface waves, by James R. Wait. Pp. 226. Price 50s.

Vol. 2. Ionospheric indices, by C. M. Minnis. Antennas and receivers for radio astronomy, by John W. Findley. Radio noise from thunderstorms, by F. Horner. Pp. 215. Price 50s. Published by Academic Press Inc. (London) Ltd., Berkeley Square House, London, W.1.

**Intrinsic Electric Strength and Electromechanical Breakdown of Polythene**, by R. A. Fava, B.Sc.

Report No. 5044 of the Electrical Research Association investigates the electromechanical compressive forces and strains and describes a technique for their measurement. Modifications for the specimen mounting are suggested which give results closer to the intrinsic strength near the critical temperature (80°C). Pp. 18. Released to members, Feb. 1964, and now generally available from Publications Sales Dept., E.R.A., Cleeve Road, Leatherhead, Surrey. Price 13s by post.

**Frequency of Self-oscillations**, by Prof. J. Groszkowski. Detailed and extensive analysis of all forms of self-oscillation in linear and non-linear electrical systems, with emphasis on the influence of circuit elements on stability. There is a 50-page section on electromechanical oscillators and a bibliography of references containing 1,900 items. Pp. 530. Polish Scientific Publishers, Warsaw, and Pergamon Press, Headington Hill Hall, Oxford. Price £5.

**Electronic Universal Vade Mecum. Vol. 1. Radio Receiving Valves. Vol. 2. Semiconductor Devices and Various Electron Devices.** Gives data on devices produced by most of the industrial countries of the world, and contains over 8,000 characteristic curves. Devices having similar or identical characteristics are segregated in over 1,000 different groups according to application. Pp. 1449. Pergamon Press, Headington Hill Hall, Oxford. Price £12.

# MANUFACTURERS' PRODUCTS

## NEW ELECTRONIC EQUIPMENT AND ACCESSORIES

### Anchor-nut Insert

AVAILABLE in a variety of thread types is the new anchor-nut insert from Avdel Ltd., of Welwyn Garden City, Herts. This nut insert—registered Nutsert—can be used on tubes as well as flat material and is simple to fit and, for that matter, easy to remove should it be necessary.

The anchor-nut insert comprises two sections, one of which is threaded and drawn into the other by means of a special tool (see illustration). It can be used on most types of material such as steel, aluminium alloy, glass fibre, plastics, etc., and can be placed in a completely blind hole from one side of the job.

16WW 301 for further details

### Stereo Magnetic Pickup Cartridges

THREE new magnetic pickup cartridges from Pickering are announced by the Goldring Manufacturing Company (Great Britain) Ltd., of 486-488 High Road, Leytonstone, London, E.11. All three units are suitable for arms with  $\frac{7}{8}$  to  $\frac{1}{2}$  in mounting centres, fitted with a diamond stylus, have a channel separation figure of 35 dB and a load resistance of 47 k $\Omega$ . The Model V-15, which only weighs 5 grams and is priced at £15 19s 8d, has a tracking weight of 2 to 5 gm; the same in fact as the Model 400AA, which is priced at £33 2s 8d. Both models have an output of 1.5 mV/cm/sec.

The tracking weight of the other, the 481AA is  $\frac{1}{2}$  to 3 gm. This one has an output of 0.5 mV/cm/sec and is priced at £40 2s 2d.

16WW 302 for further details

### Continuous Tape Transport Mechanism

A NEW deck with a continuous operating tape transport mechanism is being made by Planet Projects Ltd., of Goodman Works, Belvue Road, Northolt, Middx. It runs at  $1\frac{1}{2}$  in/sec to provide half-track mono replay facilities for pre-recorded tapes. International recording sense is used, that is to say the top track runs from left to right and bottom track right to left, thus enabling standard equipment to be used for pre-

recording the tapes for use on this deck. The standard models accept seven-inch reels, however modifications can be made to the standard deck to enable smaller reels to be played. Using double-play tape on a seven-inch reel, the length of one cycle is quoted as 8 $\frac{1}{2}$  hours. The retail price is £65.

16WW 303 for further details

### Silicon Avalanche Rectifiers on Valve Bases

DIRECT replacements for thermionic e.h.t. rectifiers in the form of silicon avalanche rectifiers mounted on conventional valve bases are announced by the rectifier division of Standard Telephones and Cables Ltd. These units have been found to have a longer life than the equivalent xenon and mercury vapour valves used in radio and television transmission, and besides broadcasting, these units should be particularly interesting to those concerned with industrial applications.

Three types are so far available from S.T.C. These are: Types AV/5R4GY; AV/3B28 and AV/4B32. The first of these is a direct replacement, on an

international octal base, for the 5R4 family of full-wave rectifiers. It is completely encapsulated, has an average anode current capacity of 250 mA, (maximum voltage drop of 2.5 V) and a p.i.v. rating of 1.6 kV. The second of these, the AV/3B28, is a fully encapsulated half-wave rectifier mounted on an American four-pin bayonet base and has a Type CT3 cap. This unit has a p.i.v. rating of 10 kV and an average anode current characteristic of 250 mA (max. voltage drop 10 V).


Suitable for natural or forced-air cooling, the third unit is a half-wave device mounted on a B4F base and has a CT3 cap. Average anode current is quoted as 1.25 A (max. voltage drop 16 V) and the p.i.v. as 10 kV.

All of these units are available from the rectifier division which is based in Edinburgh Way, Harlow, Essex.


16WW 304 for further details

### Pulse Generator


A COMPACT pulse generator designed for laboratory and production applications, where pulse repetition rates from 1 c/s to 16 Mc/s (double pulse 8 Mc/s

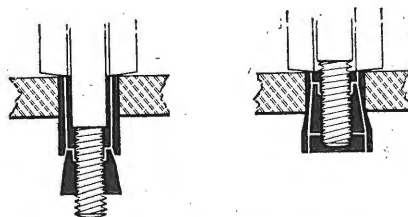


Anchor-nut insert from Avdel Ltd. The illustration on the left shows the threaded cone beginning its entry into retaining sleeve, the other shows it in its final position; the insertion tool has not been withdrawn.



Pickering V-15 magnetic pickup cartridge.

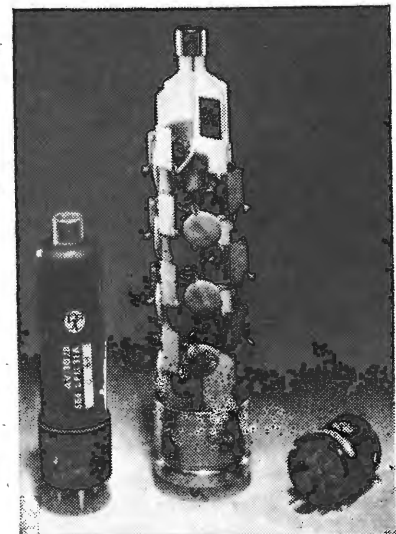


Silicon avalanche e.h.t. rectifiers on valve bases for use as direct replacements from Standard Telephones and Cables Ltd.

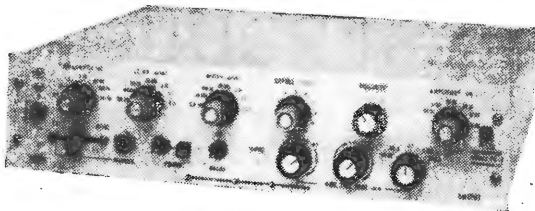

Model PG-2 pulse generator from Inter continental Instruments Incorporated.




Wideband r.f. voltmeter manufactured by the Boonton Electronics Corporation.

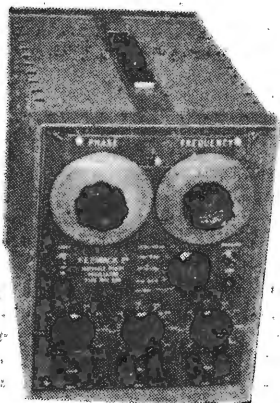

Left:—Variable phase oscillator covering 1 c/s to 100 kc/s (Feedback Ltd.).

Below:—One-watt continuous-wave argon laser from the Raytheon Company.

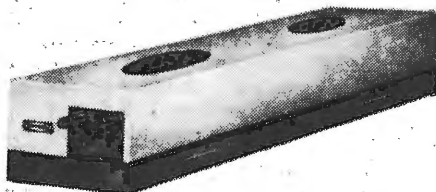

an output stability of 1%. The price is £150.

16WW 306 for further details

### Wideband R.F. Voltmeter

AN accuracy of 2% on frequencies up to 100 Mc/s is claimed for an instrument that is capable of measuring voltages from 300  $\mu$ V to 300 volts over a frequency range 20 kc/s to 1,200 Mc/s. This instrument, which is manufactured by the Boonton Electronics Corporation, of New Jersey, and handled in this country by Livingston Laboratories Ltd., of 31 Camden Road, London, N.W.1, is known as the 91DA. The accuracy of the instrument at higher frequencies is quoted at  $\pm 5\%$  to 400 Mc/s and  $\pm 10\%$  up to 1,200 Mc/s. Applications for this instrument include the measurement of high frequency characteristics of transistors and r.f. networks, and v.s.w.r. and return loss measurements of transmission systems. The price is £288, excluding duty.

16WW 307 for further details

### One-watt Gas Laser

A CONTINUOUS-WAVE argon laser operating in the single transverse mode at a power of one watt is now available from the Raytheon Company. Known as the Model LG12, its one-watt power output is over the range 4545 to 5145 angstroms in the blue-green portion of the visible spectrum with the principal lines at 4880 and 5145 angstroms.

It is a water-cooled device commercially developed as a result of basic work performed by the Company's research division, which incidentally only recently produced an output greater than one watt during experiments with argon lasers.

A three-phase 60 c/s supply delivering up to 50 amps (that required to obtain 1 watt output) is available to drive the laser head which measures 40  $\times$  12  $\times$  10 in. The head itself weighs less than 100 lb, while the associated power supply unit weighs 600 lb.

16WW 308 for further details

are required, is being manufactured by Intercontinental Instruments Incorporated and is available in this country through the instruments division of Claude Lyons Ltd., of 76 Old Hall Street, Liverpool 3 (Southern offices Hoddesdon, Herts). Known as the Model PG-2, this instrument features single or double pulses, positive or negative output up to 20 volts into 50 ohms with adjustable reference, and comprehensive triggering facilities.

Transistors are used throughout the PG-2 giving its rather compact size of only 3½ in in height, 15 in wide (rack-mounting accessories are provided) and an overall depth of 14 in. It weighs 19 lb. Other features of this instrument include adjustable pulse width from 30 nanoseconds to 200 milliseconds, delay from -20 nsec to +20 msec, and independent rise and fall times from 10 nsec to 200  $\mu$ sec. The cost of the PG-2 is £369 10s exclusive of duty and surcharge if applicable.

16WW 305 for further details

### Variable Phase Oscillator

A VARIABLE phase sine wave generator covering the frequency range of 1 c/s to 100 kc/s is announced by Feedback Ltd., of Crowborough, Sussex. Features of this instrument, which should be of particular interest to those concerned with control, vibration, audio and low

radio frequency work, include three separately adjustable outputs—a reference, a quadrature and a 0° to 360° variable phase.

Two substantially identical stages are used in the oscillator, each producing a phase shift of 90° and are followed by phase inverters to obtain four signals each separated by 90°. These four signals are fed to the cardinal points of a toroidal-wound potentiometer which is compensated to provide an almost linear adjustment of phase angle with displacement. The amplitude varies in fact by about 2% as the wiper traverses each quadrant.

Known as the VPO230, this instrument has a peak output power of 40 mW (5 volts at 8 mA into a 600  $\Omega$  load) and

### INFORMATION SERVICE FOR PROFESSIONAL READERS

To expedite requests for further information on products appearing in the editorial and advertisement pages of *Wireless World* each month, a sheet of reader service cards is included in this issue. The cards will be found between advertisement pages 16 and 19.

We invite readers to make use of these cards for all inquiries dealing with specific products. Many editorial items and all advertisements are coded with a number, prefixed by 16WW, and it is then necessary only to enter the number(s) on the card.

Readers will appreciate the advantage of being able to fold out the sheet of cards, enabling them to make entries while studying the editorial and advertisement pages.

Postage is free in the U.K., but cards must be stamped if posted overseas. This service will enable professional readers to obtain the additional information they require quickly and easily.



### Small Reed Switch

DESIGNED as a companion to the recently introduced Hamlin Type MRG-DT reed switch is the new MTRG-2. This unit is considerably smaller than the MRG-DT, but retains the same environmental characteristics. In fact, the overall length of the MTRG-2 is only 2½ in and the diameter of the glass envelope is only 0.090 in.

It is the same as the MRG-DT in as much as it does not need magnetic biasing, and also it is possible to obtain double-pole changeover, single-pole changeover, and single-pole single-throw combinations. The maximum voltage and current figures quoted for the new device are 28 V and 0.250 A respectively. A life expectancy of ten million operations is given, with a nominal contact resistance of 0.1Ω. These are available from Flight Refuelling Ltd., of Wimborne, Dorset.

16WW 308 for further details

### Piston Trimmer Capacitors

THE Stangard range of tubular glass piston trimmer capacitors manufactured by J. F. D. Electronics Corporation, of New York, are now being marketed in the United Kingdom by the capacitor division of Standard Telephones and Cables Ltd., of Brixham Road, Paignton, Devon (or London sales office at Footscray, Kent). These capacitors have a vinyl encapsulation, which protects the glass dielectric against shock, and are

available with two exterior designs; one for panel or chassis mounting and another for printed circuit insertion.

Four different capacitance ranges are available covering 0.5 to 3.0 pF, 0.8 to 5.0 pF, 1.0 to 8.0 pF and 1.0 to 12.0 pF; and all have a working voltage of 1,000 V d.c. Other electrical characteristics quoted include a "Q" figure of better than 1,000 at 1 Mc/s, insulation resistance of 10<sup>9</sup> MΩ at 500 V d.c. These properties are retained through the temperature range of -55° C to +125° C. Other features of these devices include smooth adjustment torque and multi-turn adjustment for sensitive tuning.

16WW 310 for further details

### Digital Distortion Monitor

TO help reduce the number of man-hours now devoted to monitoring operations in telegraph and data link systems, Radiation Incorporated, of Melbourne, Florida, have introduced a digital distortion monitor. Known as the Model 7525, it is designed to operate at any speed in the range 30 to 4,800 bauds. Plug-in crystals are employed to provide an easy means of changing the operating speed of the instrument, which is normally supplied with crystals for operation at 45.5, 50, 55.6, 75 and 150 bauds.

The percentage of distortion is numerically displayed on the front panel of the instrument. When marking distortion is present, the numerals are dis-

played against a red background and space distortion is indicated by a green dial background. The accuracy of the display is quoted to be within 2%.

The unit features a novel alarm output which can be used to actuate recording or counting equipment when the level of distortion in the system exceeds a predetermined level. This, of course, allows the monitored system to be analysed at a later date. The 7525 uses transistors throughout and is suitable for rack or bench use and only requires 3½ in of panel space.

16WW 311 for further details


### Subminiature 1-Amp Diodes

SMALL physical size, high surge capacity and ability to withstand high peak transient reverse voltages are features of a new series of subminiature diodes from the International Rectifier Company (Great Britain) Ltd., of Hurst Green, Oxted, Surrey. Designated 10D1 to 10D10, units in the new series are available for industrial and domestic applications where peak inverse voltage specifications of 100 to 1,000 V have to be met. Each unit in the series is rated at 1 amp at 50° C ambient and has a 10 millisecond surge rating of 50 amps.


16WW 312 for further details

### Marine Equipment


THREE new marine equipments are announced by the Cossor Communica-

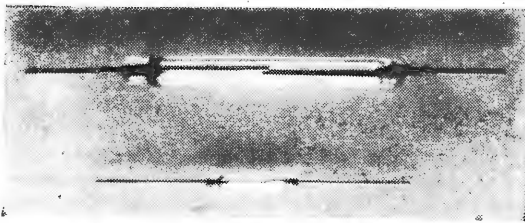


Hamlin reed switches from Flight Refuelling Ltd.

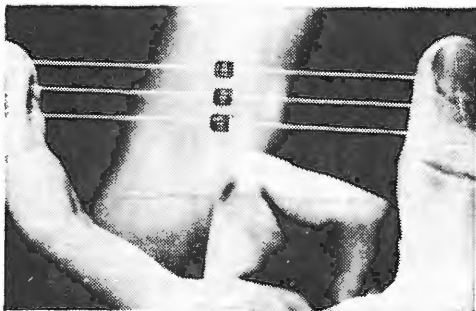

Three subminiature 1-amp diodes (p.i.v. 100 to 1,000 V) from a new series by the International Rectifier Company.

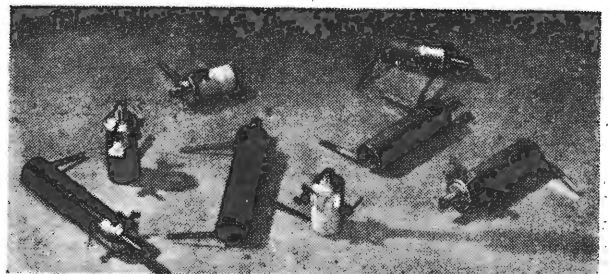

Printed circuit and chassis mounting versions of the J.F.D. Stangard piston trimmers, that are now available through S.T.C.

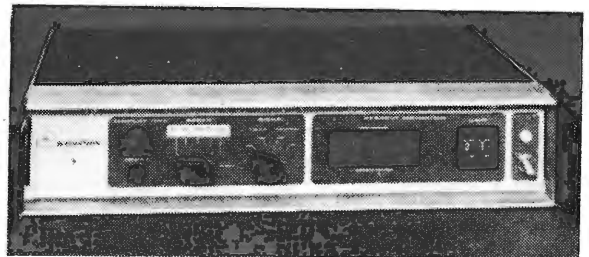

Digital distortion monitor for telegraph and data link systems, from Radiation Incorporated.

tions Company; a ten-inch 20 kW radar, two transceivers and a Loran receiver capable of receiving both the A (1,700 to 2,000 kc/s) and the C (100 kc/s) transmitted signals, the latter which has only recently been introduced and considerably extends the coverage area.

Designated Raytheon 2502 the new 3-cm transistor marine radar has been developed by the Raytheon organization and features a continuously bright picture, which has been achieved through increasing the rotation speed of the aerial, to 80 r.p.m., and the pulse repetition frequency, to a maximum of 6,000 per minute. This enables the screen to be viewed in normal ambient lighting conditions without the need of a visor.

The larger of the two new marine v.h.f. radiotelephones, the CC300M, employs a hybrid circuit of transistors and quick-heat valves to provide almost immediate operation from cold. This unit is crystal-controlled and can provide up to six channels from any 6/12 or 12/24 volt d.c. supply, whilst the other new unit, the CC2/8M is a single channel portable instrument weighing 16 oz. The output of this unit is between 100 to 500 mW (factory pre-set) and meets the requirements of the international marine specifications.

The new Loran receiver employs transistors throughout and was also developed by the Raytheon organization. Known as the Raytheon CA400, the receiver has a sensitivity of 1  $\mu$ V for 10 dB quieting and can be used to provide accurate navigational fixes at over 1,000 miles off shore. The maximum power requirements for the CA400 receiver is 32 watts.

16WW 313 for further details

### Thermoelectric Probe for Testing Small Components In-circuit

A PORTABLE thermoelectric instrument that enables temperature variations to be effected on small components whilst in circuit is being made by Daystrom Ltd., of Canada, and is available in this country through the Solartron Electronic Group, of Farnborough, Hants. Known as the Thermo-probe TP 10, this unit should prove particularly useful to those in prototype design and development as the range of the probe is from  $-20^{\circ}$  C to  $+70^{\circ}$  C, and the response time is two minutes to reach 60% of the final temperature.

Probe tips of various shapes are available to provide maximum thermal contact with the component on trial. In the cooling mode, heat is transferred from the probe tips by conduction to the faces of thermo-electric elements. From here, the heat is pumped to the opposite faces of the elements by applied direct current and then conducted to a cooling

liquid. This liquid is circulated through a liquid-to-air heat exchanger and the heat is transferred to the atmosphere. In the heating mode, the heat flow is reversed by changing the direction of the direct current through the thermoelectric elements. The quantity of heat pumped is a function of the direct current level. Temperature is sensed by a copper/Constantan thermocouple connected to a Weston pyromillivoltmeter. The cost of this instrument is £120, plus the 15% Government surcharge.

16WW 314 for further details

### Electrical Stop Clock

A SIMPLE and robust timing device, based on an original design by J. N. Emery, M.A., is now in production by Venner Ltd., Kingston By-Pass, New Malden, Surrey. A clock mechanism with 2½ in dia. seconds dial and two subsidiary 10-sec and 150-sec dials is driven by a 12 V, 50 c/s synchronous motor through an electrically-operated clutch. Contacts provide an output pulse, if required, every second and re-setting to zero can be effected either manually or electrically. Readings can


be made to 1/100th second and the accuracy is that of the power supply frequency. Overall dimensions are 4½ × 3 × 3¼ in and the price is £10 15s. Designed originally for educational experiments in physics this unit will no doubt find many uses in development laboratories.

16WW 315 for further details


### Signal Generators for Colour Television

TWO new items of test equipment for colour television are announced by C.F.T.—Compagnie Française de Télévision, of 19 rue Ernest-Cognacq, Levallois-Perret, Seine, France. The first, Type GS-10, has been developed for use in factories for the alignment of SECAM colour receivers, and the second, "Servochrom," is intended for use by the service man in installation and maintenance of SECAM receivers in the field.



Both units employ transistors throughout and the GS-10 generator will supply all the signals necessary to set-up a SECAM receiver in the factory. This includes a series of typical signals, selected by push-buttons, for controlling the various functions of the receiver; a

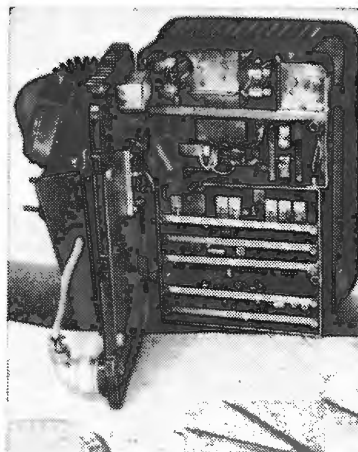

Cosor type CC300M marine radiotelephone.




C.F.T. Type GS-10 signal generator for setting up and maintaining SECAM colour television receivers.

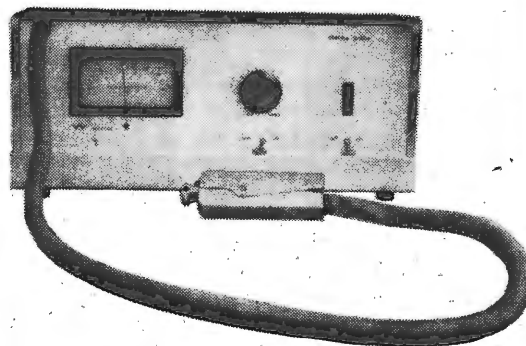


Above:—Venner electric stop clock.

Left:—Thermo-probe for in-circuit testing of small components, available through Solartron.

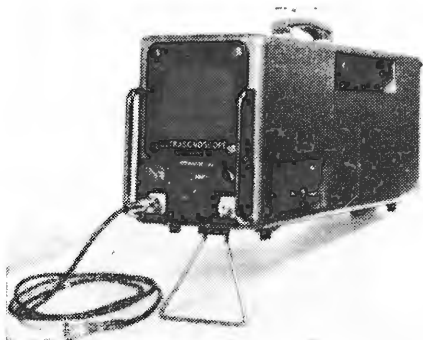


Transistor ultrasonic flaw detector from the Ultrasonoscope Co. (London) Ltd.

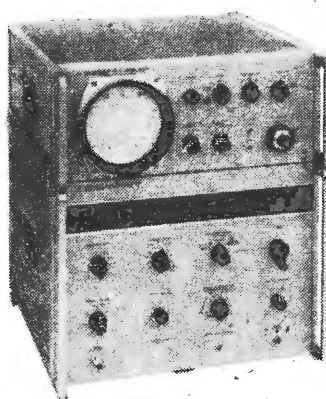

Wideband spectrum analyser from Hewlett-Packard.



Portable d.c. voltmeter and voltage calibration unit manufactured by Electro Scientific Industries Inc., of Oregon, U.S.A.

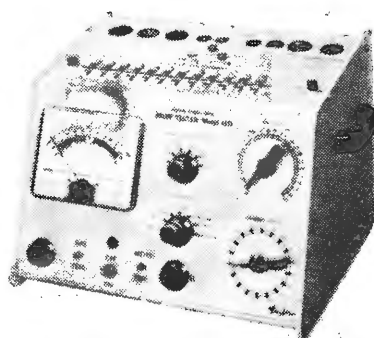

Model 45D valve tester from Taylor Electrical Instruments, of Montrose Avenue, Slough, Bucks.

black-and-white signal to provide a convergence pattern; three bar test pattern primary signals; a SECAM bar pattern signal; and a SECAM coded signal of external primary signals. In fact, when used in conjunction with a synchronizing pulse generator, it can be used to provide a composite SECAM signal.

16WW 316 for further details

### Spectrum Analyser with 2 Gc/s Sweep

A NEW spectrum analyser with adjustable sweep bandwidths up to 2 Gc/s, from 10 Mc/s to 40 Gc/s, marks the entry of Hewlett-Packard into this field of instrumentation. Known as the Model 851A/8551A, all basic functions of the instrument are calibrated; spectrum width accuracy is  $\pm 5\%$  from 100 kc/s to 3 Mc/s,  $\pm 5\%$  at 10 Mc/s and  $\pm 4\%$  from 30 Mc/s to 2 Gc/s. The accuracy to which one can set the sweep rate is quoted to be 2% and the resolution is adjustable—manually or automatically—at 1, 3, 10, 100 kc/s or 1 Mc/s. The vertical display is

also calibrated: log, 60 dB ( $\pm 2$  dB); linear, 70:1 ( $\pm 3\%$ ); and square (power), 70:1 ( $\pm 5\%$ ).

Other features of this instrument, which is designed for rack-mounting and weighs 140 lb, include an internal graticule c.r.t. that overcomes parallax distortion, and a base-line clipper that can be used to eliminate the base-line to facilitate viewing of fast pulses at low repetition rates and to prevent fogging of film when the display is photographed. A signal identifier allows frequencies of an unknown line spectra to be read directly on a slide rule scale. The price complete is £3,643. The company's address is Dallas Road, Bedford.

16WW 317 for further details

### Transistor Ultrasonic Flaw Detector

A NEW ultrasonic flaw detector using transistors throughout is announced by the Ultrasonoscope Co. (London) Ltd., of Sudbourne Road, Brixton Hill, London, S.W.2. The fastest timebase speed of this instrument, which is known as

the Mark V, is 2  $\mu$ S and enables the whole of the five-inch c.r.t. display to be filled when testing quarter-inch steel. The timebase is continuously variable with a maximum range of 20 feet in steel and the pulse repetition frequency is variable from 50 c/s to 1,000 c/s for the elimination of "ghost echoes."

The instrument is fitted with rechargeable batteries that give the Mark V a life of seven hours at one time in the field. A special mains supply unit that fits in the battery compartment can be supplied to allow the instrument to operate directly off the mains. The price of the Mark V is £650.

16WW 318 for further details

### Valve Tester

A NEW valve tester, Model 45D, that supersedes the Model 45C, has been introduced by Taylor Electrical Instruments. The appearance of the instrument has been changed by using a case with a sloping front and an easy-to-read meter. Ten valve bases, including one for nuvistors, are incorporated in the new instrument and enable tests to be carried out on most types of valve. A valve chart that gives test information on over 7,000 British, American, Continental Europe and Russian valves is provided with the instrument.

16WW 319 for further details


### Portable Voltmeter and Calibration Unit

A PRECISION d.c. voltmeter and voltage calibration unit manufactured in the United States by Electro Scientific Industries Inc. is now available in the United Kingdom through Livingston Laboratories Ltd. Designated E.S.I. 330, it features an accuracy of  $\pm 0.003\%$  of indicated reading and as a voltmeter covers the range 121.110 mV to 1211.10 volts in five ranges. As a voltage source there is three ranges; zero to 121.110 mV in 1  $\mu$ V steps, zero to 1.21110 volts in 10  $\mu$ V steps and zero to 12.1110 volts in 100  $\mu$ V steps. The battery life is 1,000 hours, and the price of the instrument is £312, excluding duty.


16WW 320 for further details

### Stabilized Power Unit for Tunnel Diode Logic


A CONTINUOUSLY variable output voltage from zero to 100 millivolts at a current of eight amps, to drive tunnel diode logic circuits, and two auxiliary supplies of +5 and -5 volts at six amps, for associated transistor circuits, are features of a stabilized power supply unit Coutant Electronics Ltd. have designed to match into standard printed

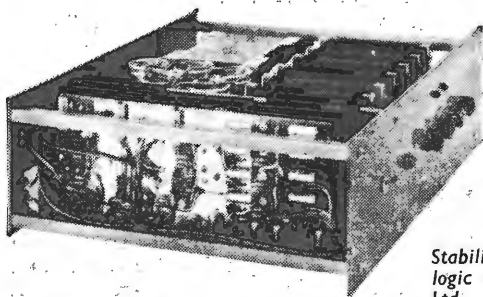


Stabilized power supply unit for tunnel diode logic applications from Coutant Electronics Ltd.

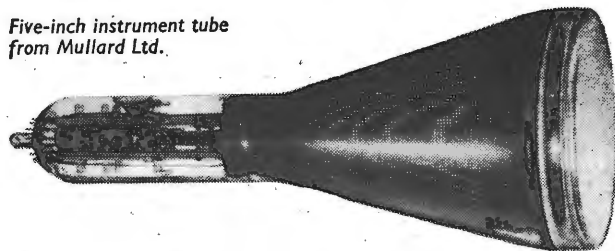

Five-inch instrument tube from Mullard Ltd.

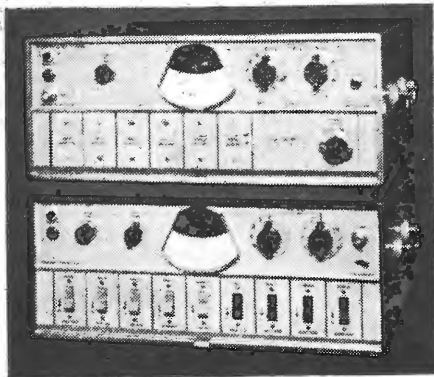

Left:—White noise test set from Marconi Instruments Ltd.



Above:—Miniature component coupling from Oxley Developments.

circuit strip lines. The output connections are, in fact, made by directly soldering the strip lines to a double-sided printed circuit board in the power unit.

To avoid voltage errors at the equipment driven by this unit through line resistance, a sample voltage is fed back to the control amplifier in the power unit's stabilizer circuit via miniature coaxial cables. Silicon semiconductors are used throughout and the unit is designed for use in standard 19-in racking and occupies a panel height of 5½ in.

16WW 321 for further details

### White Noise Test Set

DESIGNED for testing cable and radio multi-channel links with capacities of up to 2,700 channels, is the Type OA 2090 white noise test set from Marconi Instruments Ltd., of St. Albans, Herts. It is considerably smaller than its predecessors, through the use of transistors, and comprises two units; a noise generator Type TF 2091 and a noise receiver Type TF 2092.

A special semiconductor diode is employed as the noise source and used to generate white noise to a bandwidth and power level appropriate to the system under test, thus simulating fully loaded conditions. A filter with a narrow stop-band is interposed between the white noise source and the system, which in effect produces a quiet channel. The

receiver section of this test instrument is tuned to this channel and used to compare the noise level produced by intermodulation of the white noise occupying the remainder of the frequency band with the original signal in the channel.

Up to nine "quick-change" filters—each containing band-limiting and band-eliminating filters—are incorporated in the generator. These units include switches with colour-coded toggle-keys to simplify operation. The receiver unit has provision for up to six spot frequencies and also employs interchangeable filter units, which correspond to the generator band-stop filter frequencies.

16WW 322 for further details

### Five-inch C.R. Tube

AN addition to their range of oscilloscope cathode-ray tubes is announced by Mullard Ltd. in the form of a five-inch tube. This tube has an overall length of under 14 in and should be of particular interest to designers of small general purpose oscilloscopes and of equipment with "built-in" monitoring facilities. Designated D13-27GH, it has a flat-faced, medium persistence green phosphor screen with a helical post-deflection accelerator.

In common with other recently introduced Mullard tubes, a separate electrode arrangement permits direct beam blanking and this particular tube only requires a deflection voltage of 60 (maxi-

um) to effect this at the normal 3 kV operating voltage. The deflection sensitivity, also under 3 kV operating conditions, is better than 27 V/cm for the X direction and 13 V/cm for the Y direction; the minimum picture size is 10 × 8 cm.

16WW 323 for further details

### Miniature Coupling

A COMPONENT coupling with p.t.f.e. bushings, which the manufacturer's claim reduces friction and eliminate wear, is announced by Oxley Developments Co. Ltd., of Ulverston, Lancs. Designed for use on standard ¼-in diameter shafts, this coupling will provide 5° angular and ⅜ in axial displacement, and will transmit a torque of 15 oz per in.

16WW 324 for further details

### Light-emitting Diode

A FORWARD-BIASED gallium phosphide diode suitably doped to produce electroluminescent radiation of 7,000 angstroms (red) is being manufactured by the electronics department of Ferranti Ltd., of Gem Mill, Oldham, Lancs. The device, which is claimed to be the first of its type to be manufactured in the United Kingdom, is based on radiation due to the effect of the re-combination of electron-hole pairs at a p-n junction. It is encapsulated in transparent plastic and measures 0.030 × 0.040 in.

Average steady brightness of 10 to 40 lamberts is achieved by feeding it with 50 mA pulses of one millisecond duration. Current can be increased to improve the light intensity at the junction and a 1-A 1 μ sec pulse gives an increase of twenty times over the steady-state brightness. Switch-on time of the device is around 0.2 μ sec and the operating temperature range is -20°C to +70°C.

This device can also be operated in the reverse biased mode to act as a fast light source; light output rise times of less than three nanoseconds can be obtained.

The Services Electronics Research Laboratory sponsored the development of this device and were responsible for all of the initial research work.

16WW 325 for further details

# LETTERS TO THE EDITOR

The Editor does not necessarily endorse opinions expressed by his correspondents

## Television Distribution by Wire

IT is perhaps unfortunate that Mr. Kinross, in his contribution "Television Distribution by Wire," has deviated from a truly technical exposition into the realms of relay politics. For a start, one would expect from the title that a full discussion of all types of relay systems was to follow, but instead we are presented with a somewhat summary dismissal of v.h.f. systems and a lengthy, though interesting, song of praise for the h.f. distribution system. In view of this, would it not seem that the title to the article is a trifle misleading, particularly to those who know little about the television relay business?

H.f. relay networks were born out of necessity in the post-war revival of the television service, the days of double-sideband on Channel 1. Many of the old audio-only networks were faced with financial ruin unless video could be also distributed, and h.f. was chosen in preference to re-wiring a whole network!

V.h.f. systems were born out of a desire to improve upon the old distribution methods and have reached a highly advanced stage of development. They were also introduced to break the monopoly then existing wherever h.f. distribution systems were operating with their special "relay-only" sets. I would suggest that the competition from v.h.f. systems has forced the h.f. relay company to gradually make concessions to the television retailers over the receiver side of their business.

Would somebody please tell Mr. Kinross and the rest of the world about the large systems using British-made v.h.f. relay equipment that exist in Europe and North America? Let us not forget that Britain is not the only country where wired distribution systems serve a good proportion of the viewing community.

Lastly, a word about the special receivers. It is all very well to state that the purchase price of a 19in wired receiver is £21 less than that of an average cheap aerial receiver, but what happens to the purchaser of one of these sets when he or she decides to move house? People have been known to move! Furthermore, a breakdown on the relay network would leave subscribers with blank screens, whereas the subscriber with the standard receiver could get some sort of picture until the fault is rectified.

Brentwood, Essex.

G. M. YOUNG

## Resistances and Reactances in Parallel

I CAN hardly believe that the following simple construction for the impedance of a resistance and a reactance in parallel is not common knowledge, and yet in all my reading I have not come across it.

Fig. 1 shows a resistance R and a reactance jX plotted on an impedance diagram.

The impedance  $Z_s$  obtained by connecting R and jX in series is got by "completing the parallelogram" (in this case a rectangle), and is shown on the diagram.

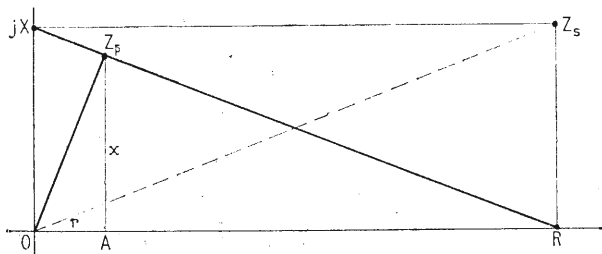


Fig. 1

The impedance  $Z_p$  obtained by connecting R and jX in parallel is found by dropping a perpendicular from the origin to the line joining the points R and jX, and is likewise shown on the diagram.

The proof is quite simple. If r and x are the resistive and reactive components of  $Z_p$ , we have to show that:

$$r = X^2R/(R^2 + X^2) \text{ and } x = XR^2/(R^2 + X^2),$$

that is, that:

$$x/r = R/X \quad \dots \quad (i)$$

and that:

$$r^2 + x^2 = (X^4R^2 + X^2R^4)/(R^2 + X^2)^2 = X^2R^2/(R^2 + X^2) \quad \dots \quad (ii).$$

These relations follow from the fact that a resistance R in parallel with a reactance jX form an impedance

$$\frac{R \cdot jX}{R + jX}, \quad \text{which when rationalized becomes } \frac{X^2R/(R^2 + X^2) + jR^2X/(R^2 + X^2)}{R^2 + X^2}.$$

Thus

$$r = X^2R/(R^2 + X^2) \text{ and } x = R^2X/(R^2 + X^2).$$

The triangles OR(jX) and OAZ<sub>p</sub> are similar, therefore AZ<sub>p</sub>/OA = OR/O(jX). This proves relation (i).

The triangles ORZ<sub>p</sub> and OR(jX) are also similar, therefore OR/OZ<sub>p</sub> = R(jX)/O(jX), thus

$$R/(r^2 + x^2)^{1/2} = (R^2 + X^2)^{1/2}/X,$$

therefore:

$$r^2 + x^2 = X^2R^2/(R^2 + X^2), \text{ which is relation (ii).}$$

A similar construction holds for a conductance and a susceptance in series. Fig. 2 shows how to obtain the conductive

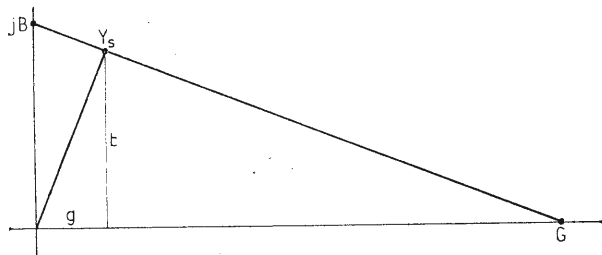


Fig. 2

and susceptive components, g and b, of a conductance G connected in series with a susceptance jB. The diagram is an admittance diagram, and  $Y_s$  is the admittance of G and jB in series.

The proof of this case follows similar lines as in the one given above.

In each of these cases, if the values of R and X, or of G and B, are at all awkward, the method described here using a sheet of graph paper and a set square is very much quicker and easier than the calculation.

Manchester

G. HOFFMANN DE VISME

## Practical Transistor Circuit Design

MR. HOBBS (p. 619, Dec. 1964 issue) appears to have missed the point of my criticism in my last letter, so I would like to explain the reasoning behind my arguments.

To describe the performance of a three-terminal active network, a set of four mutually independent parameters is generally required. The h, y, and z parameters are three such sets. The sets are interrelated by exact algebraic expressions.

The equivalent-T network also has four independent parameters,  $r_b$ ,  $r_e$ ,  $r_c$  and  $\alpha$  (or  $\beta$ ), which are completely com-

patible with the h parameters, and represent the three-terminal "black box" just as adequately. In addition, the T configuration provides a guide to the internal workings of the transistor.

Examination of the hybrid- $\pi$  network as used by Mr. Hobbs shows that, by neglecting  $r_{b'b'}$ , there are only three independent parameters. It therefore does not give an adequate description of the three-terminal network, let alone the internal transistor mechanism. A look at the input resistance of the grounded-emitter stage—with the collector short circuit and open circuit illustrates this point:

$$\text{In h parameters, } R_{in(RL=0)} = h_{11}, R_{in(RL=\infty)} = h_{11} - \frac{h_{12}h_{21}}{h_{22}}$$

$$\text{In T parameters, } R_{in(RL=0)} \approx r_b + \beta r_e, R_{in(RL=\infty)} \approx r_b + r_e$$

$$\text{In hybrid-}\pi \text{ parameters, } R_{in(RL=0)} \approx r_{b'e}, R_{in(RL=\infty)} \approx \frac{r_{b'e}}{2}$$

The significant point is that in the hybrid- $\pi$  case, both values of input resistance use only the parameter  $r_{b'e}$ . An independent parameter must be discarded from the other two systems to make them compatible with the  $\pi$  system, in which the lack of generality is inherent. I can see no justification for discarding a parameter,  $\epsilon$ s such a practice is not an approximation, but an omission! It is worth looking at an actual transistor to show this. The transistor type 2N3114 has typical h parameters quoted at  $I_c=1.0\text{mA}$  and  $V_{CE}=5.0\text{V}$ , which are:

$$h_{11} = 1,500\Omega$$

$$h_{12} = 1.5 \times 10^{-4}$$

$$h_{21} = 50$$

$$h_{22} = 5.3 \times 10^{-6} \text{ mho}$$

From these figures it is easily shown that

$$R_{in(RL=0)} = h_{11} = 1,500\Omega.$$

$$R_{in(RL=\infty)} = h_{11} - \frac{h_{12}h_{21}}{h_{22}} = 1,500 - \frac{1.5 \times 10^{-4} \times 50}{5.3 \times 10^{-6}} = 85\Omega.$$

The ratios of these two values is almost 18, somewhat different to the value of 2 predicted by Mr. Hobbs!

The factual criticisms in my previous letter were based on the above arguments, and still, I think, hold good. I was unable to follow Mr. Hobbs' line of reasoning in his reply.

Camberley, Surrey

M. TILEY

*The author replies:—*

I am grateful for Mr. Tiley's numerical example and agree that I am using simplified equations for the hybrid- $\pi$  equivalent circuit. In the hybrid- $\pi$  circuit there are, in fact, five parameters:  $r_{e'e}$ ,  $r_{b'b'}$ ,  $r_{b'e}$ ,  $r_{b'b}$  and  $\beta$ , and whilst four parameters are required to describe a three terminal active network, the equivalent circuit used as a guide in design can, if it helps, have more than four elements. I drew attention in the September issue to the difference between the component elements of an equivalent circuit and the h-parameters (or y or z parameters) which describe the "black box" externally.

Of course, one can always work out exact algebraic relations between these two, and the input resistance can be expressed in terms of either. As Mr. Tiley says,  $R_{in}$  for  $R_L=\infty$  is  $h_{11}$

$$- \frac{h_{12}h_{21}}{h_{22}}. \text{ First rewriting the expression as } R_{in} =$$

$$h_{11} \left( \frac{1 - h_{12}h_{21}}{h_{11}h_{22}} \right) \text{ and substituting the typical values for the}$$

2N3114 we do get  $R_{in} = 1.5\text{k}\Omega(1 - 0.943) = 85 \text{ ohms}$ . Now

my approach effectively adopts a value of 0.5 for  $\frac{h_{12}h_{21}}{h_{11}h_{22}}$

(for reasons which I explained in my previous letter). It is my assumption as regards  $r_{e'e}$  which leads to the difference in our results and not my neglect of  $r_{b'b'}$  (this can always be added in when significant). In the equivalent -T network  $r_{b'b'}$  forms part of  $r_b$ .

I am concerned about the figure 0.943 and suspicious of substituting a set of typical values into the expression when obviously a small change in any one of the parameters will make a wide difference to the calculated magnitude of  $R_{in}$ . Are the typical values a result of taking a mean for each parameter over a large number of samples or are they in fact a consistent set in themselves?

To satisfy the figures as a set, the components of the hybrid- $\pi$  circuit need to take the values:  $\beta=50$ ,  $r_{b'e}=1.5\text{k}\Omega$ ,  $r_{b'e}=\epsilon$

$9.5\text{M}\Omega$  and  $r_{e'e}$  needs to be very large depending on the value taken for  $r_{b'b'}$ —about  $11\text{M}\Omega$  when  $r_{b'b'}$  is 30 ohms, for instance. The maximum voltage gain is apparently very high—111,000—and, examined in terms of the hybrid- $\pi$  circuit it is Miller feedback which makes the input resistance turn out so low for  $R_L=\infty$ . If these figures are to be believed, the output resistance should also vary over a range of 18 to 1 for  $R_s$  going from zero to infinity. It is not too difficult to measure a variation of output resistance and in my experience (for say the ASY29 or 2N708) the factor is never more than two or three to one so that my simplified equations give a good representation of a practical device.

G. P. HOBBS

## Cone Surrounds

WHILST searching for the cause of a variable low level distortion and loss of bass in my gramophone system I was finally and reluctantly forced to examine the loudspeaker which, since it carries a renowned name, I had hitherto regarded rather like Caesar's wife as beyond suspicion. To my amazement I found the foamed plastic surround was completely perished. Knowing that this material will last much longer than the seven years that the speaker had been in use, I looked for some unlikely cause. A clue was given by a colleague who suggested that the foamed material acted as a leaky valve and that the smoke from my cheroots had been pumped through and caused the disintegration. Accepting part of his suggestion it seemed more likely that something had been pumped from inside the wooden structure. There seemed to be two possibilities: some vapour had been given off either by the block board itself, or by the glue I had used to hold it together. The latter was an epoxy resin and sure enough the hardener when poured on some of the remaining suspension went through it in a truly proverbial manner.

This letter is not, of course, intended as an indictment of the makers of either the glue or the loudspeaker, both of which products are beyond reproach, but as a warning to future wooden horn builders to be on their guard, since other cone suspensions and synthetic glue vapours may react similarly.

Gidea Park.

FRANK ROADS

## Equalizing in Audio Pre-amplifiers

A CIRCUIT which is frequently found in the first stage of an audio pre-amplifier is that shown in the diagram below.


Here, a number of different inputs: radio, tape, microphone, gramophone pickup, etc., can be catered for by a simple switching arrangement, and the desired equalizing, input impedance, and sensitivity can be obtained by switching in suitable different values of  $R_1$  and  $Z$  for each case. In this way the signal level at B is made roughly the same whatever input is being used, thus easing design problems in the rest of the pre-amplifier.

The desirability of carrying out the equalizing in this way in cases where the sensitivity needs to be high (as when handling the output of a tape replay head or a ribbon microphone) has been questioned by seekers after the ultimate, because the S/N ratio obtained is necessarily worse than that in the alternative arrangement where the input is connected

directly to the valve grid, and the equalizing is done in a later stage.

The writer recently had occasion to compare the two circuits theoretically and made the discovery that the noise level of the feedback type of circuit need not be as high as it often is.

Point A in the circuit is a virtual

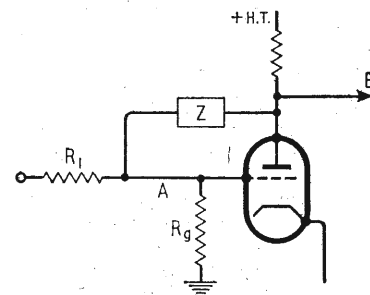

earth (low impedance point) as far as the input is concerned, and therefore it might be thought quite in order to make the value of the grid leak  $R_g$  relatively small. If this is done, it certainly has no effect on the performance of the circuit as far as the input signal or any unwanted signals picked up by the input circuitry are concerned. However, if one considers the effect of the feedback on the shot noise generated *inside* the valve (which is the prime cause of the noise background of the ultimate output), it is easily shown that  $R_g$  affects the noise level at B, since the more noise fed back, the less there will be at the output. It therefore pays to make  $R_g$  as high as possible.

In a circuit used by the writer for tape replay, the valve is an EF 86,  $R_1 = 56 \text{ k}\Omega$ , and Z consists of  $330 \text{ pF}$  in series with  $390 \text{ k}\Omega$ . The original design value of  $R_g$  was  $100 \text{ k}\Omega$ . In this case a slight noise background was noticeable.  $R_g$  has been increased to  $2.2 \text{ M}\Omega$ , and the noise background is now negligible. The theoretically expected improvement in this case was 4 dB.

In a similar published circuit intended for a microphone input,  $R_1 = 1 \text{ M}\Omega$ , and Z consists of  $0.1 \mu\text{F}$  in series with  $10 \text{ M}\Omega$ . The writer does not at present use this particular circuit, but here the theoretical improvement in S/N due to changing  $R_g$  from  $100 \text{ k}\Omega$  to  $2.2 \text{ M}\Omega$  is 17 dB.


Bournemouth

F. B. JOHNSON

### W.W. Transistor FM Tuner

I HAVE found that the following modification to this circuit gives improved reception in areas of low signal strength ( $10$  to  $15 \mu\text{V/m}$ ), by substantially reducing the background noise.

When the input to the Schmitt trigger is around the limit-

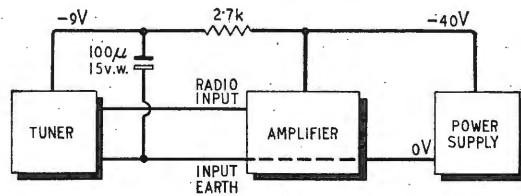

ing value of  $300 \text{ mV}$ , the h.f. ripple on the standard  $130 \text{ kc/s}$  signal is of sufficient magnitude to cause intermittent operation of the trigger circuit, producing a harsh crackling background. This h.f. may be reduced by connecting a small capacitor directly across  $R_{10}$  ( $6.8 \text{ k}\Omega$ ) at the input to the i.f. amplifier. The optimum value may vary with individual conditions but  $1000$  to  $2000 \text{ pF}$  has been found to give good results. It is easy to incorporate this capacitor whether pin or printed-circuit construction is used.

Incidentally, this tuner is ideal for use with the transistorized high-quality amplifier (both the old, and the new version described in this issue), since the sensitivity and input impedance of the radio input are about  $100 \text{ mV}$  and  $100 \text{ k}\Omega$  respectively. The power supply may be taken directly from the  $-40$  volt amplifier supply via a  $2.7 \text{ k}\Omega$  dropping resistor (my tuner requires  $11.8$  milliamps) and decoupled by  $100 \mu\text{F}$ . However, it is important to take the earth return (including the capacitor) to the signal earth line at the input terminal (as shown) and not to the power supply. This will ensure that the very low hum and distortion levels of both circuits are maintained.

Farnborough, Hants.

J. DINSDALE

## Colour Correspondence Course

WHEN colour television eventually arrives in Britain many of us will have to supplement our knowledge of general principles with a great deal of hard, factual information on the operation of equipment, particularly colour receivers. Those in greatest need, of course, will be the service technicians. Anybody who wishes to prepare himself in advance of the actual event can now do so by taking advantage of a home study course in colour television made available in the U.K. through RCA Great Britain Ltd.

The great advantage of the course is that it is based on 11 years' experience of broadcasting and receiving colour television in the U.S.A. Its main limitation is that the more specific information provided is tied to the N.T.S.C. system, as operated on American standards, and to American receivers and test equipment. This limitation is perhaps not as serious as it sounds, however, since two out of three of the contending systems in Britain (N.T.S.C. and PAL) are very similar to American N.T.S.C., and many of the circuit techniques now being used in American receivers would certainly be adapted to British requirements (the set makers having already seen to this) if one of these two systems were to be adopted.

The course, which costs £20, is contained in eight lessons: principles; colour tubes; receiver functions; setting up and adjustment; circuitry; alignment; fault tracing; and test equipment. These are presented in four books, with a binder for holding them together. The explanatory material is well written and the diagrams are clear and informative (though some of the receiver circuits are a trifle cramped). Each lesson is followed by an examination paper of 20 questions, couched in the following typical form:

"The instantaneous output of one of the chrominance demodulators is zero when the phase difference between the chrominance signal input and the CW signal input is (a)  $0^\circ$ ; (b)  $90^\circ$ ; (c)  $180^\circ$ ; (d)  $57^\circ$ ?"

Completed examination pages have to be sent to RCA Great Britain for marking, after which they are returned.

A companion RCA publication on colour, intended specifically for the service technician, is a 153-page, hard-cover book entitled "Colour TV Troubleshooting Pict-o-Guide."

Designed as a compact and easy-to-use handbook, on the principle that "pictures tell the story best," it contains over 130 colour photographs taken from tube screens, illustrating the effect on the picture of various receiver conditions and faults. The price is £2 10s including postage.

The home study course booklets in their binder, with, in front, the "Pict-o-Guide" for fault finding.



# LOGIC WITHOUT TEARS

## AN INTRODUCTION TO SWITCHING ALGEBRA

By H. R. HENLEY, A.M.I.E.R.E.

IN 1854 George Boole published his paper: "An Investigation into the Laws of Thought", in which he developed his algebra of Logic or as it is now widely known, in his honour, Boolean algebra. Little did he realize at that time that his work, intended to facilitate the processes of mathematical research, would be used so extensively for such "impure" mathematical applications as digital computing and control engineering.

Development of a switching algebra from Boolean algebra usually involves fairly rigid mathematical methods of reasoning. This is very well for an elaborate treatise on the subject, but is considered unnecessary for this article in which it is intended only to provide an introduction to the subject. For this purpose an almost Lewistic approach will be used to develop the few rules necessary to carry out analysis and synthesis of simple switching systems.

Switching systems may take many forms, e.g. an automatic telephone system using thousands of relays, etc., or a digital computer using semi-conductors; both to perform switching operations on a logical basis. In either of these examples, and in the general case we are concerned with statements about the system which, at any instant, may be two-valued, i.e. true or false, for example, whether a given potential is present or absent from a wire, whether a given path is conducting or non-conducting, and so on.

Suppose a wire A may have either 10 volts or zero volts on it. Then the statement "Wire A is at 10 volts" may be either true or false, depending on whether 10 volts is present or not. A convenient symbolism may be used; we can assign the value 1 to the statement if it is true and say  $A=1$ , and the value 0, i.e.  $A=0$ , if the statement is false.

In forming statements to describe the operation of a system we inevitably use (or imply the use of) the connectives AND, OR and NOT. By suitable choice of language any statement can be rephrased in these terms and for this reason the algebra to be described is based on them. For instance in a system we might have the condition that "an output voltage level of 10 volts is obtained on wire F only if wires A and B are at a potential of 10V but not wire C, or if wires A and C and D are at zero volts." Clearly this form of specification becomes unwieldy and a symbolic method is desirable if only to enable one to see the "wood as well as the trees."

To do this we postulate three operations AND, OR and NOT, borrowing the symbols  $\times$  and  $+$  from ordinary algebra for the first two and putting a bar  $\bar{\quad}$  over a symbol to indicate negation, e.g.:

$A + B$  reads A or B.

$AB$  or  $A \cdot B$  or  $A \times B$  reads A and B

$\bar{A}$  reads NOT A and is also called the complement of A. It follows that  $1 = 0$ , i.e. Not true = false and *vice versa*.

Since we are using (some) algebraic symbols and writing

algebraic-looking equations it is only reasonable to see whether any of the rules of ordinary algebra will be of any use in this algebra. To decide this, for simplicity, we shall use simple logic circuits made up of relay contacts [the relay coils will not be shown] and denote by S the statement "The circuit through the switching network is continuous." When this is true,  $S = 1$ .

First consider the parallel net of contacts A, B and C (Fig. 1).

The network is continuous if A, or B or C is operated.

Therefore  $F = A + B + C$

Clearly  $F = A + C + B$  or  $C + A + B$  etc., i.e. the order in which the contacts are considered (or wired) does not alter the truth of the statement.

Similarly for the series net (Fig. 2).

The network is continuous only if A and B and C are operated simultaneously.

Then  $F = A \cdot B \cdot C$

and again the order is unimportant.

This is a convenient point at which to introduce a useful device called a truth table. This is simply a table showing the possible values of the variables A, B, etc. and the resultant values of F. For example, consider the second function above,  $F = A \cdot B \cdot C$ ; the truth table is shown in Fig. 3.

This shows that  $F = 1$  only when  $A = B = C = 1$ .

It is desirable to adopt a systematic method of writing down the possible values of the variables. This is most simply done by the method used above. In the first column write alternate 1's and 0's. In the second write alternate pairs of 1's and 0's. In the third write alternate quadruples of 1's and 0's. In the n'th column (for n




Fig. 1




Fig. 2

A	B	C	F
0	0	0	0
1	0	0	0
0	1	0	0
1	1	0	0
0	0	1	0
1	0	1	0
0	1	1	0
1	1	1	1

Fig. 3



variables) write  $2^{n-1}$  1's followed by  $2^{n-1}$  0's. Only  $2^n$  rows are necessary.

The significance of the NOT or complement function should perhaps be clarified in the case of relay contact networks. If we have a circuit in which  $S = A$ , then A is clearly a "make" (or normally made) contact, and  $S = 1$  when  $A = 1$  (i.e. when A is operated). If  $S = \bar{A}$  then  $S = \bar{A} = 1$  when  $A = 0$ , i.e. when the contact is operated it must present an open circuit. This requirement is satisfied by a "break" (or normally closed contact). The convention is used in which contacts are shown in the normal (unoperated) state [in accordance with B.S. 530].

The truth table for A and its complement  $\bar{A}$  is simply:

A	$\bar{A}$
1	0
0	1

Two other rules are the distributive laws of OR and AND, they are:—

$$A(B+C) = AB+AC \dots (1)$$

$$A+BC = (A+B)(A+C) \dots (2)$$

Rule (1) is similar to ordinary algebra, but (2) has no equivalent in ordinary algebra.

Also from the definitions of AND and OR, 1 and 0, it follows that:—

$$\begin{aligned} 1+1 &= 1 & A.A &= A \\ 1+0 &= 1 & A+A &= A \\ 1 \times 1 &= 1 & A+1 &= 1 \\ 1 \times 0 &= 0 & A.1 &= A \end{aligned}$$

All of the above may be verified using the truth table.

Attention is drawn to the fact that operations similar to division and subtraction do not exist, and cannot be used in simplifying equations. e.g. it is not possible to conclude that if  $A+BC = A+D$ , say, then  $BC=D$  by subtracting A on each side as in ordinary algebra. Such operations are *undefined* and therefore have no logical meaning.

One very important property of the algebra is its duality. The dual of 1 is 0; the dual of A is  $\bar{A}$ ; the dual of AND is OR; and *vice versa*. This is exemplified in rules 1 and 2 above;

$$A(B+C) = AB+AC \dots \dots \dots (a)$$

$$A+BC = (A+B)(A+C) \dots \dots \dots (b)$$

in which + and  $\times$  are interchanged in (a) to give (b) and *vice versa*. This is stated generally in the Duality Law: "If a theorem is valid, so too is its dual."

In general the dual of an equation is found by interchanging + and  $\times$ , and 0 and 1.

The above rules are used to prove other relationships and to simplify expressions describing complex switching circuits. Before dealing with examples of these we must first consider a more general way of depicting logical operations diagrammatically. This is desirable since the use of relay contacts, as hitherto, would be unnecessarily restrictive. In most of the applications of switching algebra, electronic devices rather than relays are used and the translation of a relay diagram, into its equivalent using, say, transistors may be long and tedious. In many applications a standard transistor circuit may be used to perform each of the three functions (or combinations, e.g. NOT-AND) rendering realization of the final circuit a simple matter, if a system of symbols is used to represent logical operations.

The system used here is that recommended by B.S.530.

The AND and OR functions are both represented by circles with a number of input wires and one output wire. The number within the circle indicates the number of inputs which must be simultaneously at 1 for the out-

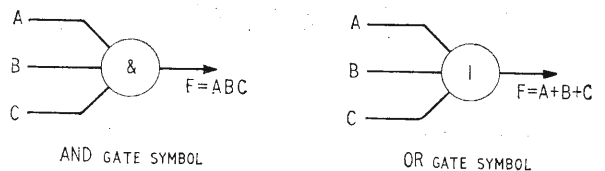


Fig. 4

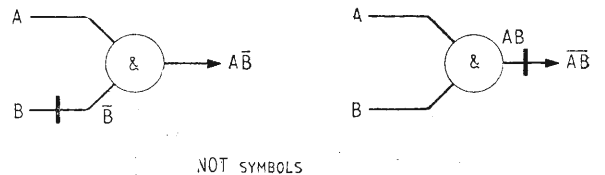



Fig. 5

put to be 1. Clearly for the AND function this number will be equal to the number of inputs, whereas for the OR function it will always be 1 (Fig. 4).

These are called, generally, gates rather than the term "circuit" used hitherto. Thus the AND gate is said to be open when all inputs are 1, and closed if one or more are at 0.

NOT is represented by a short bar drawn across a signal lead (Fig. 5).

When it is desired to show that a physical logic element is performing the NOT function, the following symbol is used:—



We shall now consider a few examples which are useful in reducing equations to simpler forms—this is referred to as "minimization"

$$\begin{aligned} F &= A + AB \\ &= A.1 + AB \\ &= A(B + \bar{B}) + AB \\ &= AB + A\bar{B} + AB \text{ using the distributive rule for AND} \\ &= AB + A\bar{B} \text{ since } AB + AB = AB \\ &= A(B + \bar{B}) = A.1 = A \end{aligned}$$

This is a startling result since this suggests that the original circuit can be replaced by a direct connection, i.e. all circuit elements are redundant and input B does not affect the final output. The truth of this result may be verified by means of a truth table (Fig. 6).

A	B	AB	A+AB
1	1	1	1
0	1	0	0
1	0	0	1
0	0	0	0

Fig. 6

The first and last columns of the table are identical, verifying that the circuit may indeed be replaced by a direct connection.

In terms of the logic diagram this means that in Fig. 7 (a) can be replaced by (b).

The dual of this is  $A(A+B) = A$  which may be proved in the same way.

Another pair of dual theorems which are useful in minimization are:—

$$\begin{aligned} A(\bar{A}+B) &= AB \\ A+\bar{A}B &= A+B \end{aligned}$$

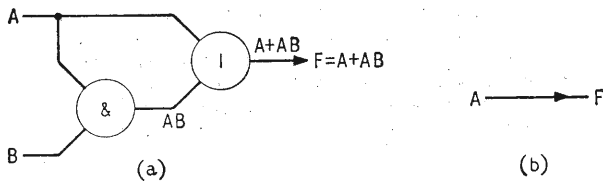


Fig. 7

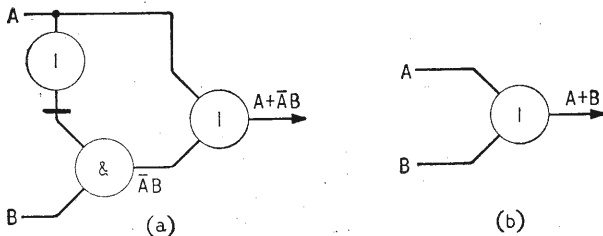


Fig. 8

In the second equation of the pair,  
 $A + \bar{A}B = (A + \bar{A})(A + B)$  (using the Distributive law for OR)  
 $= 1 \cdot (A + B)$   
 $= A + B$

They may both be verified by means of a truth table. In terms of logic circuits, the simplification is shown in Fig. 8, where (a) can be replaced by (b).

This results in a saving of one AND gate and a device for producing  $\bar{A}$ , which, as we shall see represents a considerable economy in a large installation where the above circuit may be used in quantity.

**De Morgan's Theorem:**—This is an important theorem both in analysis and synthesis of logic circuits particularly in the realization of circuits using NAND and NOR (NOT-AND and NOT-OR) logic. The theorem states:—

$$\overline{AB} = \bar{A} + \bar{B}$$

and by duality  $\overline{A + B} = \bar{A} \bar{B}$

These statements are fundamental to Boolean algebra; we shall verify the first by means of the truth table (see Fig. 9).

The last two columns are identical, verifying the

A	B	$\bar{A}$	$\bar{B}$	$\overline{AB}$	$\overline{A + B}$
1	1	0	0	0	0
0	1	1	0	1	1
1	0	0	1	1	1
0	0	1	1	1	1

Fig. 9

A	B	C	F
1	1	1	1
1	0	1	0
0	1	0	1
1	0	0	0

Fig. 10

✓  $F = ABC$

✓  $F = \bar{A}\bar{B}\bar{C}$

A	B	F
1	1	0
0	1	1
1	0	1
0	0	0

Fig. 11

theorem. It is left to the reader to repeat this for the dual form.

From this the following may be derived.

$$\overline{AB + CD} = (\bar{A} + \bar{B})(\bar{C} + \bar{D})$$

and  $\overline{(A + B)(C + D)} = \bar{A}\bar{B} + \bar{C}\bar{D}$

It is seen that De Morgan's theorem is a more general expression of the Duality Rule which we dealt with earlier.

**Synthesis:**—We are now in command of sufficient knowledge to tackle the subject which is probably of most interest, that of synthesis of control circuits.

The problem in general is to design a logic event which will control a device or devices in a certain prescribed fashion when its inputs are in certain allowed states. For example, a passenger lift control system, which must determine whether or not the gates are closed; which floor is calling, or has been selected by a passenger; whether it is operator or passenger controlled etc. In general such systems fall into two broad classes—combinational and sequential. The first class will be dealt with here and concerns those circuits in which the outputs correspond to certain input combinations. The second class of circuit involves another element—time. The circuit outputs are functions of the inputs and the previous state of the circuit. This subject is beyond the scope of the present article.

The requirements of a combinational logic system are usually stated, as in the above case, in words. This has to be translated into a truth table which relates the input and output devices. From this table we derive equations relating the inputs and outputs. The process employed is derived from the theory for expansion of equations into their canonical forms and is simply this:

Mark each row of the truth table for which the output is true (i.e. 1). Now write down the product of the input functions for each of these rows, writing the function when its truth value is "1" and its complement when it is "0". Now add the separate products and equate to the output function.

For example, if the truth table for a system is required to be as shown in Fig. 10 we select rows (1) and (3) since F has the truth value 1, and from the sum of products:

$$F = ABC + \bar{A}\bar{B}\bar{C}$$

As a simple example let us consider the exclusive OR circuit. This differs from the simple inclusive OR dealt with earlier in that it excludes the condition A and B simultaneously 1. The required operation is that the output is 1 if A=1 or B=1 but NOT A and B=1. The truth table is shown in Fig. 11

Now the output  $F = 1$  in rows 2 and 3, and the required equation is therefore:—

$$\bar{A}B + A\bar{B} = F$$

In general the equation obtained from the truth table will be more complex than in this example and it is first necessary to apply one or more of the rules in order to reduce it to its simplest form. Having reached this stage, all that remains is to translate the algebraic expression into a logic diagram.

To do this it must first be realized, from reference to the above work on gates, that each + sign implies an input to an OR gate, and each "product" requires inputs to an AND gate, e.g. the sum  $AB + C$  requires an AND gate with 2 inputs and an OR gate with 2 inputs, one of which will be the output of the AND gate. Returning to the above example where the circuit equation is  $F = \bar{A}B + A\bar{B}$ . There are two products, therefore two, two-input AND gates are required. There is one OR gate which has two inputs which are the outputs of

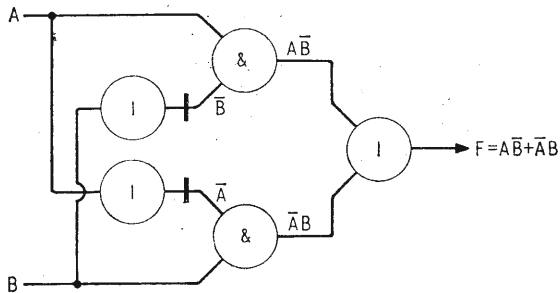


Fig. 12

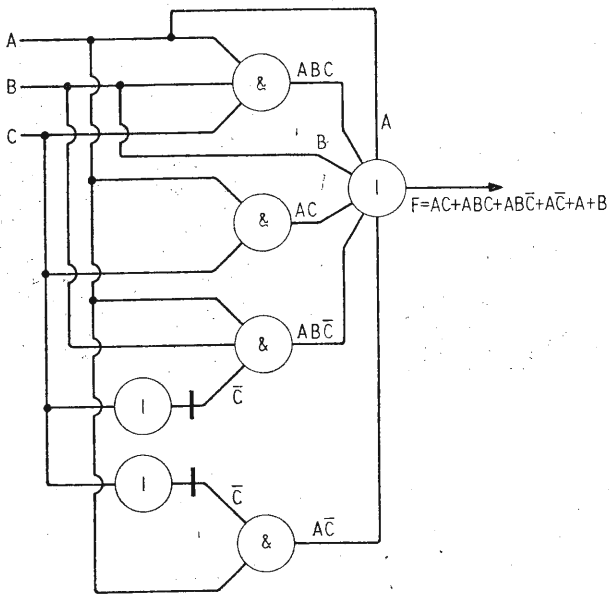


Fig. 13

the AND gates. In addition two NOT circuits are required for  $\bar{A}$  and  $\bar{B}$  (see Fig. 12).


In practice we shall encounter more complex expressions such as  $F = AC + ABC + ABC\bar{C} + AC\bar{C}$ ; the diagram for this may be drawn directly, as in Fig. 13.

Although two inverters for  $\bar{C}$  are shown, one would serve to drive both inputs.

This is a good example to which we can apply some of the rules which were stated above. The first step is to factorize the equation where possible, i.e.

$$\begin{aligned}
 F &= A(C + \bar{C}) + AB(C + \bar{C}) + A + B \\
 \therefore &= A + AB + A + B = A + AB + B \text{ since } A + A = A \\
 \therefore &= A + B \text{ since } A + AB = A \qquad C + \bar{C} = 1
 \end{aligned}$$

Thus the rather complex circuit above may be replaced by one OR gate:—



### Electronic Circuits for Realization of Logical Operations

The next consideration is the realization of the logical functions AND and OR as electronic circuits. There are various types of electronic circuits which can be used to

perform these operations, of these, the simplest and cheapest is diode logic, examples of which are shown in Figs. 14 and 15.

Both gates, as shown, are for use with logic voltage levels of  $-E$  volts  $\equiv$  "1" and 0 volts  $\equiv$  "0." Clearly in the case of the AND circuit, if either of the inputs A, B, or C are at 0 volts the output will be 0 volts, since one of the diodes D1-3 will be forward biased. (The output will actually differ from zero by the forward volt-drop of the diode, typically 0.3 volts.)

If A, B and C are simultaneously at  $-E$  volts then the output will be  $-E$  volts. If the inputs are all at different, (but negative) voltages, the output will not be greater than the lowest input voltage.

In the case of the OR gate, with all the inputs at 0 volts, the output will be approx. 0 volts. If A or B or C or any combination are at  $-E$  volts the output will be  $-E$  volts.

It is worth noting here that if the alternative convention of  $-Ev \equiv$  "0" and  $0v \equiv$  "1" is used it is simply necessary to interchange Figs. 14 and 15 to obtain the OR and AND functions respectively.

With this system the input sources must be able to supply current of the same order as the load current, and the output level is dependent upon the input conditions (i.e. no. of inputs in use and voltage levels). Signal levels deteriorate over a few stages and it is necessary to restore them by means of an amplifier stage (e.g. an emitter follower).

The common-emitter amplifier is used to perform the NOT function, Fig. 16.

When the input is at 0 volts ("0") the base of Vt1 is held positive by the potential divider  $R_1$  and  $R_2$ , cutting off Vt1. The output voltage is therefore  $-E$  volts [neglecting volt-drop in  $R_3$  due to transistor leakage current and assuming the circuit is unloaded]. The output is thus logic "1".

If the input changes to the "1" level, i.e.,  $-E$  volts,

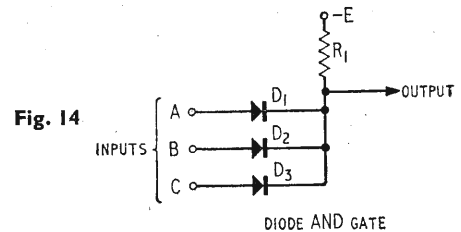


Fig. 14

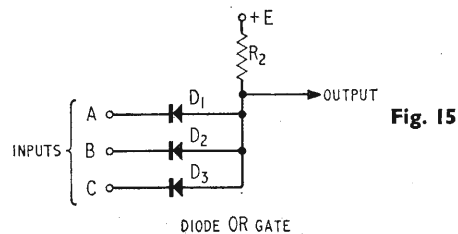


Fig. 15

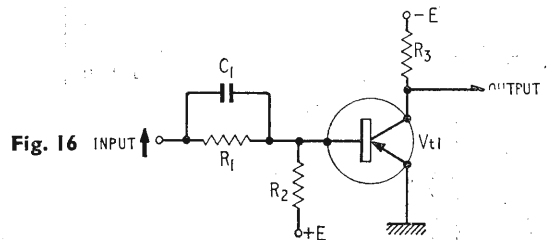


Fig. 16

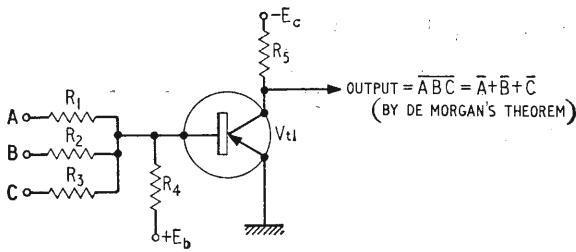


Fig. 17.


the base of Vt1 goes negative and Vt1 saturates. The volt-drop across R<sub>3</sub> is then approx. - E volts and the output is 0 volts (logic "0").

The above circuits lend very well to the design of standard circuits (or "logic building bricks") for logic systems. Rules can be evolved from which the allowable electrical interconnections may be determined. This reduces the design problem to one of formulating the equations, determining the best (irredundant) form, drawing the logic diagram and implementing a few rules. Such systems are commercially available.


Another system, which is also commercially available, and is gaining popularity, is the NAND/NOR system (otherwise referred to as Sheffer stroke Logic—Ref. 3). In this system the functions of NOT and AND are combined to give the NAND operation; similarly the NOT and OR to give NOR.

The basic circuit for NAND, using logic levels of 1 ≡ 0 volts and 0 ≡ - E volts, is illustrated in Fig. 17.

The base resistors R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub> are so chosen that with all inputs at 0 volts (1) Vt1 is cut off, and the output is approx. - E (0). If one or more inputs are at - E volts (0), Vt1 saturates and the output is 0 volts (1). The operation is the same as the inverter previously described but with an AND function at its input. Thus the equivalent circuit is:



A convenient symbol is:—



Clearly in the above circuit if the logic levels are interchanged, i.e., 1 = - EV and 0 = 0 volts, the transistor will conduct if either of its inputs are at "1" level and will be cut-off only when all its inputs are at the "0" level. This is then a NOR circuit, see Fig. 18. Since the circuits are duals it follows that one type may be used to perform all logical functions.

These circuits may also be designed as a "building brick" and have the advantage that amplification is available at each gate. This means that any one gate






Fig. 18.

can drive a larger number of other gates than would be possible with a simple diode gate. An additional advantage is that the logic levels are restored to their correct values at each gate output, which can facilitate in fault-finding.

There are two approaches to the implementation of NAND logic. The first is simply to derive the logic diagram using Boolean algebra and then replace each element with its equivalent in NAND logic, e.g., for the simple AND gate shown:—




the equivalent NAND circuit is:—



In this case we make use of the fact that  $\overline{\overline{A}} = A$ . We know that a single NAND gate produces complementation, so a second NAND stage is necessary.

Similarly for the OR function:—



here we make use of De Morgan's theorem:—

$$F = A + B + C$$

$$= \overline{\overline{A} \overline{B} \overline{C}} = \overline{\overline{A} + \overline{B} + \overline{C}} = A + B + C$$

The extreme right-hand side is the required output, and the left-hand side may be interpreted as a three-input NAND gate whose inputs are  $\overline{A}$ ,  $\overline{B}$  and  $\overline{C}$ , see Fig. 19.

From the above it is evident that to implement any one isolated function requires more elements than are used

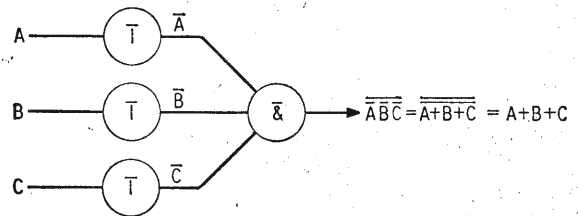


Fig. 19.

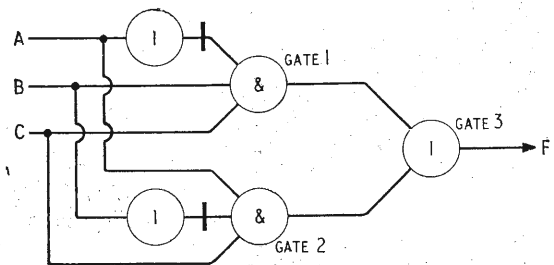


Fig. 20.

Fig. 22.


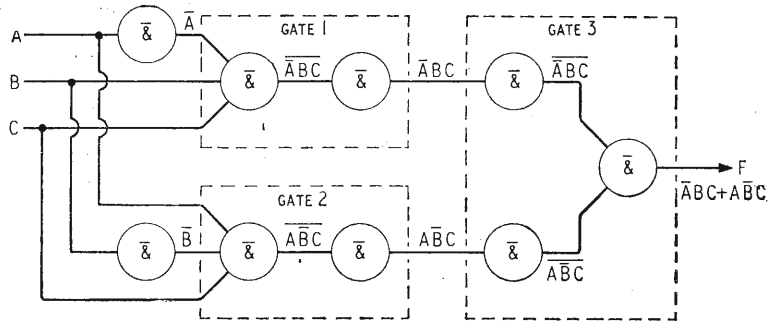


Fig. 21.

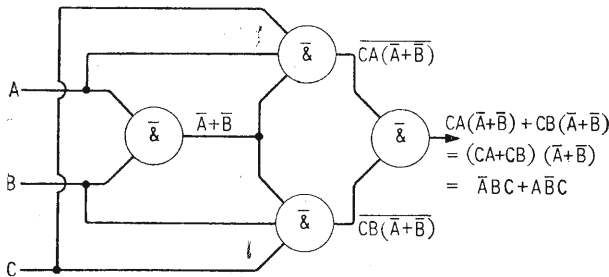

with the pure logic described earlier. However, in a larger system involving a combination of AND, OR and NOT functions, many elements may become redundant. This is shown in the following example.

Consider the function  $\bar{A}BC + A\bar{B}C$ . In pure logic this involves two AND gates (for the two products), two NOT elements and one OR gate, as shown in Fig. 20.

Fig. 21 shows the circuit using the NAND equivalents derived above.

Clearly the four gates which are crossed through are redundant since they merely perform a NOT operation twice on the same function.

The alternative approach to the design of this circuit is to rearrange the Boolean expression into a form which represents directly the outputs of NAND (NOR) elements. In the above case we can write:—

$\bar{A}BC + A\bar{B}C = \overline{ABC + A\bar{B}C}$ , i.e., simply complementing each term twice.

Then by De Morgan's theorem

$$= \overline{A + B + C + A + B + C}$$

Each term and the entire expression now represents the output of a NAND element. Note that A must be complemented in the first term and B in the second term.

The resulting circuit is seen to be identical to that obtained above by the "equivalent circuit" method. This is not, however, the most economical solution. This may be found by applying the theorems developed above, e.g.,

$$\begin{aligned} \bar{A}BC + A\bar{B}C &= C[\bar{A}B + A\bar{B}]. \text{ By the Distributive AND rule.} \\ &= C[\bar{A}B + A][\bar{A}B + A\bar{B}] \text{ By the Distributive OR rule.} \\ &= C[(A+B)(A+\bar{A})(\bar{A}+\bar{B})(B+\bar{B})] \\ &\text{By the above rule,} \\ &= C[(A+B)(\bar{A}+\bar{B})] \\ &= CA(\bar{A} + \bar{B}) + CB(\bar{A} + \bar{B}) \end{aligned}$$

In the last step we have a common factor  $\bar{A} + \bar{B}$ , i.e., a single NAND element with inputs A and B. The complete circuit is shown in Fig. 22.

The above example serves to illustrate how NAND

(NOR) logic may be implemented using the methods of Boolean algebra. The final circuit uses four elements, i.e., four transistors, compared with the original circuit using AND/OR logic which required 3 gates and 2 inverters, a total of 8 diodes and 2 transistors. Since the cost of diodes and transistors are of the same order and the NAND circuit has greater driving power, the advantages of using this latter type of logic is obvious.

It is not proposed to pursue these topics further or to consider sequential switching circuits which are beyond the scope of the present article. It is hoped that the original aim to provide an introduction to "the algebra of switching circuits" has been served. A more detailed treatment of the subject may be obtained from Refs. 2 and 3 below.

Finally, I would like to acknowledge the help and encouragement of my colleagues in the preparation of this article and the permission of the Engineer-in-Chief G.P.O., for permission to publish.

#### REFERENCES

1. "An Investigation into the Laws of Thought." G. Boole, 1854.
2. The Logic Design of Transistor Digital Computers. Maley & Earle. (Prentice-Hall.)
3. "A Set of Five Independent Postulates for Boolean Algebra", H. M. Sheffer, Trans. Amer. Math. Soc. Vol. 14. (1913.)
4. "Switching Circuits for Engineers." M. P. Marcus, (Prentice-Hall) (1962).

## U.K. Stereo Broadcasting

IN its annual report the B.B.C. states that it "believes that stereophony can produce a worthwhile improvement in reproduction, especially of music, and that there is a public demand for it, which though a minority demand is nevertheless substantial." It adds that stereo broadcasting would encourage v.h.f. listening, provide a new market for receivers and probably assist the radio industry in its export drive. However, no definite plans can be made to introduce a service until a decision is reached on the system to be used.

Until the adoption of a common system for use in Europe has been agreed upon all European countries introducing experimental stereo transmissions have been asked to use the pilot-tone or Zenith-GE, system.

The B.B.C.'s dual-transmitter stereo experiments on alternate Saturday mornings have been brought to an end. However, the experimental stereo transmissions from the London v.h.f. station at Wrotham on 91.3 Mc/s using the pilot-tone system will be continued. These are now being radiated on Tuesdays, Wednesdays and Thursdays from 2.30-3.00 (test tone) and 3.15-3.45 (programme material).

The recently licensed commercial radio station in Douglas, Isle of Man, now transmits a regular stereo programme. It uses two frequencies in the v.h.f. band as well as m.w.

# COMMERCIAL LITERATURE

The November 1964 edition of the **Mullard Semiconductor Designers Guide** is now available from the technical office of the Industrial Markets Division of Mullard Ltd., Mullard House, Torrington Place, London, W.C.1. This 25-page publication begins with "Quick find transistor charts" that list the devices under the main headings of collector voltage, total dissipation and cut-off frequency, and is followed by a "Quick alphabetical/numerical guide" that describes the devices from type numbers. A Mullard C.V. list precedes the main body of the publication, which deals more fully with the technical details of their semiconductors. International outlines, to which these devices comply are included in this booklet.

16WW 326 for further details

**STC Semiconductor Devices Data Summary** is the title of a new publication (No. M/106) available from the Components Marketing Division of Standard Telephones and Cables Ltd., which is based at Footscray, Sidcup, Kent. This publication lists the S.T.C. semiconductors currently in production (except thermistors—summarized in publication MK/140—and selenium rectifiers) and gives their essential ratings and characteristics. Outline drawings of the units are included and appear with a cross-reference to international standards to which they conform. Integrated circuits and other multiple devices are also featured in this 46-page booklet.

16WW 327 for further details

The 1964 edition of the **Kelvin Hughes** miniature general catalogue (48-pages) is now available from the publicity department, New North Road, Hainault, Ilford, Essex. This publication, the text of which is presented in English, French, German, Norwegian and Spanish, covers their radar, navigational instruments and fishing aids.

16WW 328 for further details

Variations of Muirhead's range of **precision wire-wound resistors** are given in a new 23-page publication entitled "Precision Resistors," available from Muirhead & Co., of Beckenham, Kent. A considerable amount of space is devoted to the selection of the resistors included, whose accuracies range from 1% to 0.02%, power ratings from 0.5 to 2 watts, and temperature coefficients down to 10 parts in 10<sup>6</sup> per degree Centigrade.

16WW 329 for further details

**Home Radio (Mitcham) Ltd.**, of 187 London Road, Mitcham, Surrey, announce the publication of their latest catalogue. Within its 200 pages, many hundreds of components, for which they act as stockists, are listed. These range from aerial sockets and b.f.o. coils to wire cutters and zener diodes. A comprehensive selection of audio equipment, communications receivers and measuring instruments is also included in the catalogue, for which a charge of 5s is made; recoverable through orders at a rate of 1s in the pound.

The **M.E.L. Equipment Company** has recently launched a house organ called *M.E.L. Review*. It gives brief details of new items from the development and production side of M.E.L. and its overseas associates. Further issues will be published at three to four month intervals. Applications for inclusion on the mailing list should be sent to the M.E.L. Equipment Co., 207 Kings Cross Road, London, W.C.1.

16WW 330 for further details

An abridged catalogue describing **new microwave instruments** has been forwarded to us by the Radar and Communication Instruments Division of Elliott Brothers (London) Ltd., of Elstree Way, Boreham Wood, Herts. In addition to instruments, it gives details of a number of accessories including X- and Q-band crystal detector mounts, attenuators, matched terminations and couplers, and an X-band waveguide to coaxial transformer.

16WW 331 for further details

Coaxial cables manufactured by **British Insulated Callender's Cables Ltd.**, and associated connectors and terminations made by **B.I.C.C.-Burdy Ltd.** are featured in a 32-page publication entitled **Radio Frequency Cables**. Section 1 of the publication (No. M.941B) deals with numerous types of coaxial cables and tabulates their electrical and physical characteristics. The second section of the publication, which is available from B.I.C.C.'s head office at 21 Bloomsbury Street, London, W.C.1, is sub-divided to cover r.f. connectors, Uniring and Hying terminations for coaxial cables, multiway connectors and installation tools.

16WW 332 for further details

"**The big difference is inside**" is the title of a recent leaflet from Tektronix U.K. Ltd., of Beaverton House, Station Approach, Harpenden, Herts. It describes the Mark B version of the Model 545 d.c. to 30 Mc/s oscilloscope, which has a similar electrical specification to the "A," but incorporates a number of circuit changes.

16WW 333 for further details

Possible applications of the **Type 8 closed-circuit television camera** are listed in a new brochure now available from EMI Electronics Ltd., of Hayes, Middx. Details are also given of the accessories which enable an elaborate network of cameras and receivers to be built.

16WW 334 for further details

Reprints from *Siemens-Review* of an article on "**High-Current Silicon Mesa Switching Transistors**" by Günther Eberhard are now available from R. H. Cole Electronics Ltd., of 7-15 Lansdowne Road, Croydon, Surrey. The article is based on the Types BUY 12 and BUY 13 transistors developed by Siemens & Halske.

16WW 335 for further details

**Zonal Film (Magnetic Coatings) Ltd.**, of 23 Roden Street, Ilford, Essex, have just published a 12-page booklet entitled **The Basis of Every Good Magnetic Recording**. It comprises two sections, the first of which gives a brief description of the grades of Zonatape available, and how a top quality recording is made and tested. Suggestions from a professional recordist appear in the latter part on how to get the best from tape recordings and from tape recorders.

16WW 336 for further details

Three technical publications issued during September by the Westinghouse Brake and Signal Company, of 82 York Way, King's Cross, London, N.1, deal with **silicon power transistors**. The first of these (36-100) describes the Types 151 and 152 transistors which have a power dissipation of 100 watts and are available with collector-to-emitter characteristics of 80 to 200 volts maximum. Technical Publication 36-101 deals with Types 153 and 154 which have twice the power rating of the 151 and 152 and versions are available with maximum collector-to-emitter voltages from 65 to 225V. The other publication (36-104) covers the Types 163 and 164 which are similar to the 153 and the 154, but are able to pass 20 A. as against 7.5 A. The Types 151 and 152 are rated at 6A. Copies are available from the Rectifier Division.

16WW 337 for further details

A leaflet describing the Elremeco "**Crystal**" **auto-reset dial timer** is now available (List No. 200) from the Electrical Remote Control Company of Bush Fair, Harlow, Essex. A mechanical and electrical specification of the timer, which is driven by a non-reversing synchronous motor, is included along with mounting instructions. Standard time ranges are from 0-10 seconds up to 0-48 hours.

16WW 338 for further details

**Stereo Record Care.**—Cecil E. Watts, a pioneer of disc recording, gives sound advice in a 16-page booklet "A Guide to the Better Care of Your L.P. and Stereo Records," obtainable from him at Darby House, Sunbury-on-Thames, Middx., price 6d by post.

# "CHORUS"

By MICHAEL LORANT

## RESULTS OF RECENT INVESTIGATIONS INTO ONE TYPE OF WHISTLER ATMOSPHERIC

**O**RIGINALLY named "dawn chorus" for its resemblance to sounds of birds in the English countryside at dawn, "Chorus," as it is now generally named, consists of a multitude of tones rising in frequency from 1 to 2 kc/s and usually lasting 0.1 to 0.5 second. It is often accompanied by noises or hiss, covering the same frequency as those contained in the chorus. Often it will occur in bursts, starting from a background of little or no chorus, rapidly building up in intensity and repetition rate, and then receding to background noise.

No adequate theory of the origin of Chorus is accepted, although several hypotheses have been proposed by researchers. The best known is the travelling-wave hypothesis; others include plasma oscillations in the exosphere, Cerenkov radiation, and radiation from protons spiralling down the field lines with gyromagnetic frequency Doppler-shifted by an amount depending on the velocity of the particles and the ambient electron density. This last hypothesis is supported by results obtained by Murcray and Pope.

### Receiving Equipment

Since Chorus is an e.l.f./v.l.f. emission it can be received on equipment for listening to "whistlers," another v.l.f. phenomenon. This has made many stations readily available for chorus observations. The equipment used consists of an aerial, an amplifier having a voltage gain of about  $10^6$  and a passband from 500 c/s to 15 kc/s, and a tape recorder. The aerial used at the College, Alaska station, for example, is a delta-shaped loop antenna 30 feet high and 60 feet across the base.

Chorus activity is sampled at each participating station by recording it on magnetic tape for 2 minutes of each

hour, beginning at 35 minutes past the hour. The strength of each Chorus sample is evaluated as an integer on a 0-5 scale by monitoring technicians, each of whom is specially selected on the basis of his audio responses.

### Influence of Latitude


Observations recorded at 29 whistler stations were used in the Bureau's study. Three of the stations (College, Kotzebue, and Barrow) were operated by the Geophysical Institute of the University of Alaska. The rest were scattered over the western hemisphere and Europe, from Alaska to Antarctica, and from Sweden westward to Australia. Observations were made of Chorus at the College, Alaska station from 1956 to the present time, and at each of the other stations for several years.

The occurrence of Chorus is greatest in the region between  $60^\circ$  and  $70^\circ$  geomagnetic latitude in both hemispheres. While experimental scatter prevents more accurate determination of this region, the correspondence with the auroral zones seems significant.

Chorus activity shows seasonal variations at all stations, but not in the same pattern for all; some stations exhibit maxima during winter and others during summer. However, Chorus activity does seem to reach its peak during summer at stations at low latitudes and in winter at high latitudes, although additional evidence is needed to render this finding conclusive.

All stations examined show a definite diurnal variation and, as has been known for some time, a time of diurnal maximum related to the latitude of the station. Above the zone of auroral maximum, however, this

Fig. 1. Data used in the U.S. National Bureau of Standards' study of "Chorus" originated from the world-wide array of whistler-study stations shown in this map. Many of the data were obtained during participation of these stations in the IGY programme. Continuous data were provided by the College, Alaska station (CO), one of the three operated by Geophysical Institute of the University of Alaska.

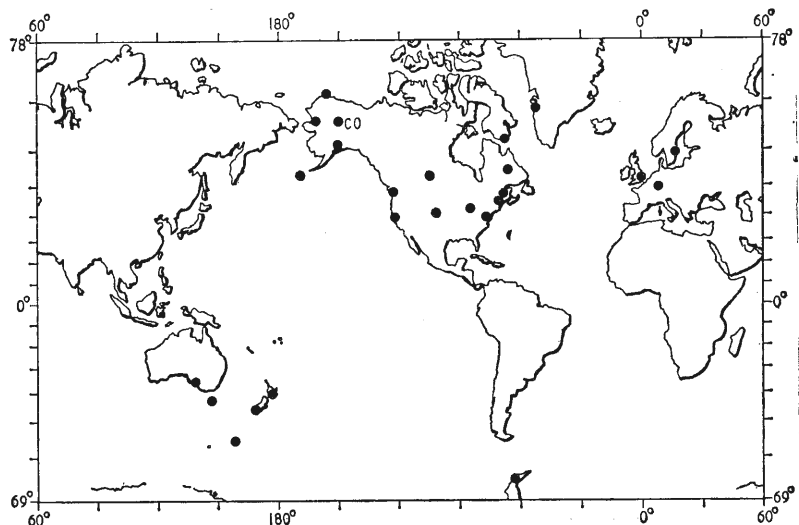

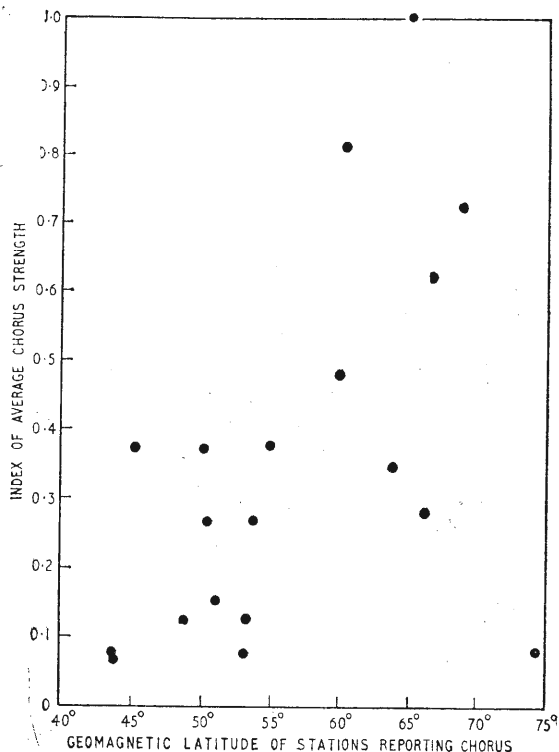


Fig. 2. The average index of "Chorus" was greatest at stations between latitudes 60° and 70°, North and South. Stations reporting indexes above 0.5 are those located at College, Alaska; Macquarie Island (near Antarctica); Barrow, Alaska and Ellsworth, Antarctica.

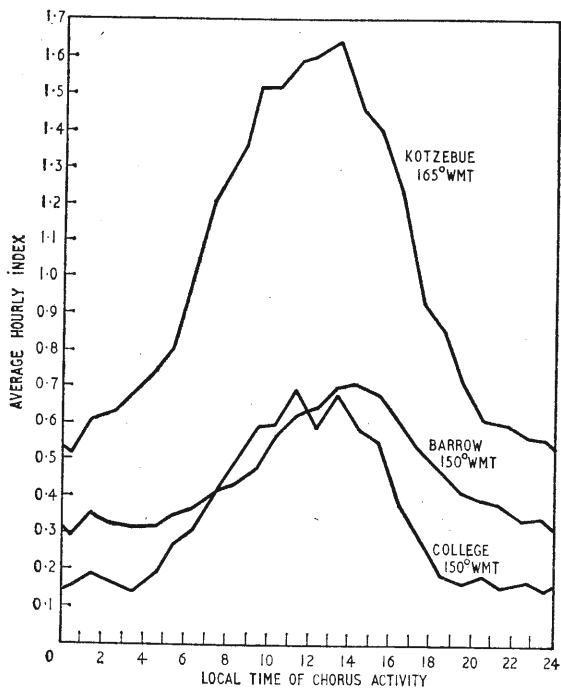


Fig. 3. Plots of the hourly average index of chorus activity are similar in shape for three different Alaskan stations, although greatly different in level.

dependence breaks down. A pronounced delay in diurnal peak with increasing geomagnetic latitude is evident.

Chorus is found to be related to geomagnetism, having a positive correlation index in the lower latitudes of 0.5 to 0.6 with the geomagnetic K-indices (an approximate measure of solar-terrestrial particle activity as determined from magnetograms). At the high latitudes, however, the correlation varies with the season in a complex way, being positive near the solstices and negative near equinoxes.

### Frequency Patterns

Chorus varies greatly in its frequency—the tone may either ascend or descend, or even consist of simultaneously ascending and descending branches. It may warble or be relatively steady. Statistical studies of Chorus frequencies can be made using the highest frequency, the lowest frequency, the mid-frequency, and the rate of change of frequency. An earlier study at the College, Alaska station showed that the mid-frequency varies diurnally. The maximum frequency was used in the studies to avoid the greater influence of harmonics of powerline noise on measurements of minimum frequency and mid-frequency.

Plots of variation of maximum frequency against season and hour of day at the Barrow, College, and Kotzebue Alaskan stations show a marked similarity. Not only are maximum frequency patterns similar for the three stations for the measured years, but the plots of average maximum frequency during a day were similar for the three Alaskan stations, each approaching a marked diurnal peak in the evening hours before midnight. Further analysis of the rate of Chorus frequency changes observed at the three stations showed a surprising similarity, both among stations and for different years.

### REFERENCES

- "A high-latitude investigation of the natural very-low-frequency electromagnetic radiation known as Chorus," by J. H. Pope, *J. Geophys. Res.* **68**, 83-99 (Jan. 1, 1963).
- "Origin of very-low-frequency emissions," by R. M. Gallet and R. A. Helliwell, *J. Res. NBS* **63D**, 21-27 (July 1959).
- "The very-low-frequency emission generated in the earth's exosphere," by R. M. Gallet, *Proc. I.R.E.* **47**, 211-231 (Feb. 1959).
- "A study of the audio-frequency radio phenomenon known as 'dawn chorus,'" by M. McK. Allcock, *Aust. J. Phys.* **10**, 286-298 (June 1957).
- "Physics of the Aurora and Airglow," by J. J. W. Chamberlain, p. 278, Academic Press, New York (1961).
- "Theory of the origin of the very-low-frequency radio emissions from the earth's exosphere," by J. W. MacArthur, *Phys. Rev. Letters* **2**, 491-492 (June 1959).
- "Doppler shifted cyclotron frequency radiation from protons in the exosphere," by W. B. Murcray and J. H. Pope, *Phys. Rev. Letters* **4**, 5-6 (Jan. 1960).
- "Radiation from protons of auroral energy in the vicinity of the earth," by W. B. Murcray and J. H. Pope, *J. Geophys. Res.* **65**, 3569-3574 (Nov. 1960).
- "Energy fluxes from the cyclotron radiation model of v.l.f. radio emission," by W. B. Murcray and J. H. Pope, *Proc. I.R.E.* **49**, 811-812 (April 1961).
- "The eccentric geomagnetic dipole," by W. D. Parkinson and J. Cleary, *J. Geophys.* **1**, 346 (Dec. 1958).
- "An investigation of whistlers and Chorus at high latitudes," by J. H. Pope, Sci. Report 4 AF 19 (604)-1859, U. of Alaska (1959).



# JANUARY MEETINGS

*Tickets are required for some meetings: readers are advised, therefore, to communicate with the secretary of the society concerned*

## LONDON

4th. I.E.E.—“The present state of gallium arsenide technology” by J. R. Knight and K. Hambleton at 5.30 at Savoy Place, W.C.2.

11th. I.E.E.—“Speech compression” by Dr. J. Swaffield at 5.30 at Savoy Place, W.C.2.

13th. I.E.E. & I.E.R.E.—“Potential levels in the central nervous system—their detection and significance” by Prof. Sir Bryan Matthews at 5.30 at Savoy Place, W.C.2.

14th. S.E.R.T.—“Transistorized hi-fi” by D. M. Chave at 7.15 at the London School of Hygiene and Tropical Medicine, Keppel Street, W.C.1.

20th. I.E.R.E.—“Acoustic communication underwater” by Dr. B. K. Gazey and Dr. J. C. Morris at 6.0 at London School of Hygiene and Tropical Medicine, Gower St., W.C.1.

20th. Soc. of Environmental Engrs.—“A central recording station for a climatic laboratory” by R. T. Lovelock at 6.0 at the Mechanical Engineering Dept., Imperial College, Exhibition Rd., S.W.7.

21st. I.Mech.E.—Discussion on “Information retrieval” at 4.0 at 1 Birdcage Walk, S.W.1.

22nd. I.E.E. & I.E.R.E.—Discussion on “The direct recording of biological signals” at 2.30 at Savoy Place, W.C.2.

22nd. I.E.E.—Colloquium on “Network analysis” at 2.30 at Savoy Place, W.C.2.

22nd. Instn. of Electronics.—“The high-quality reproduction of sound” by K. F. Russell at 6.45 at Senate Hall, University of London, Maddox St., W.C.2.

25th.—I.E.E. & I.E.R.E.—Colloquium on “Logic circuits” at 10.30 a.m. at Savoy Place, W.C.2.

26th. I.E.E.—Colloquium on “Analogue to digital conversion” at 3.0 at Savoy Place, W.C.2.

26th. Royal Society of Arts.—“The British contribution to educational television in the Commonwealth” by L. J. Lawler at 5.15 at John Adam Street, W.C.2.

27th. I.E.R.E.—Symposium of short papers on “Enhancement and absorption of radar radiation” at 6.0 at London School of Hygiene and Tropical Medicine, Gower Street, W.C.1.

28th. Inst. of Phys. & Phys. Soc.—“Listening and acoustical measurements in recent concert halls” by Dr. Leo L. Beranek and “Some experiences with recently opened concert halls in Germany,” by Dr. H. Kuttruff at 3.0 in the Physics Dept., Imperial College, Prince Consort Rd., S.W.7.

## ABERDEEN

13th. I.E.E.—“The planning of communication satellite systems” by F. J. D. Taylor and J. K. S. Jowett at 7.30 at Robert Gordon's Technical College.

## BIRMINGHAM

4th. I.E.E.—Discussion on “The changing pattern of technological education and training” at 6.15 at the College of Advanced Technology, Gosta Green.

19th. I.E.E.—Faraday Lecture on “Colour television” by F. C. McLean at 7.0 at the Town Hall.

20th. Television Soc.—“Television facilities—1: Live, tape or film?” by I. Atkins at 7.0 at the College of Advanced Technology, Gosta Green.

## BRIGHTON

19th. I.E.R.E.—“Design and applications of a fast industrial static switching system” by G. W. Pontin at 6.30 at the College of Technology.

## BRISTOL

20th. I.E.R.E. & I.E.E.—“Some aspects of radio-active particle detection techniques and associated circuit design” by J. R. Brown at 7.0 at the University Engineering Laboratories.

## CARDIFF

13th. I.E.R.E. & I.E.E.—“Parametric amplifiers” by Dr. T. Buckley at 6.30 at Welsh College of Advanced Technology.

## CHELTENHAM

29th. I.E.R.E.—“Digital storage” by W. Renwick at 7.0 at North Gloucestershire Technical College.

## DONCASTER

19th. I.E.E.—“Motor control using silicon controlled rectifiers” by N. J. Duncan at 6.30 at the Technical College, Waterdale.

## DUNDEE

14th. I.E.E.—“The planning of communication satellite systems” by F. J. D. Taylor and J. K. S. Jowett at 7.0 at the Electrical Engineering Dept., Queen's College.

## EDINBURGH

12th. I.E.E.—“Digital techniques for multiplying frequency” by A. Russell at 6.0 at the Carlton Hotel, North Bridge.

13th. I.E.R.E.—“Quality and reliability” by F. Baxter at 7.0 at The University, Drummond Street.

## FARNBOROUGH

14th. I.E.R.E. & I.E.E.—“Attitude control of the Skylark sounding rocket” by J. F. M. Walker at 7.0 at the Technical College.

## GLASGOW

11th. I.E.E.—“Digital techniques for multiplying frequency” by A. Russell at 6.0 at the University of Strathclyde, George Street.

14th. I.E.R.E.—“Quality and reliability” by F. Baxter at 7.0 at Institution of Engineers and Shipbuilders, 39 Elmbank Crescent.

## LEEDS

26th. I.E.E.—Discussion on “The new H.N.C. in electrical and electronic engineering” opened by A. D. Collop at 6.30 at Leeds College of Technology.

## LEICESTER

19th. Television Soc.—“Medium screen colour projection” by P. Lowry at 7.15 at the Vaughan College, St. Nicholas Street.

21st. I.E.E.—Faraday Lecture on “Colour television” by F. C. McLean at 7.15 at the De Montfort Hall.

## LIVERPOOL

20th. I.E.R.E.—“Radio astronomy” by Dr. R. C. Jennison at 7.30 at Walker Art Gallery.

25th. I.E.E.—Discussion on “Solid state concepts in teaching engineers” opened by J. H. Leck at 6.30 at the Royal Institution, Colquitt Street.

## LOUGHBOROUGH

28th. I.E.R.E. & I.E.E.—“Nuclear instrumentation” by R. B. Quarmby at 6.30 at the College of Advanced Technology.

## MALVERN

18th. I.E.E.—“Pulse compression radar” by H. H. Boyenval at 7.30 at the Winter Gardens.

## MANCHESTER

7th. S.E.R.T.—“Solid state dielectrics” by R. I. Walker at 7.30 at the Engineers' Club, Albert Square.

12th. I.E.E.—“Inertial navigation” by R. Whalley at 6.15 at the Manchester College of Science and Technology.

18th. Inst. Eng'g. Inspection.—“Non-destructive testing by electronic instruments” at 7.45 at Manchester Literary and Philosophical Society, 36 George Street.

26th. I.E.E.—Faraday Lecture on “Colour television” by F. C. McLean at 2.15 and repeated at 7.30 at the Free Trade Hall.

## NEWCASTLE UPON TYNE

13th. I.E.R.E.—“Field effect transistors and their applications” by C. S. den Brinker at 3.0 at Institute of Mining and Mechanical Engineers, Westgate Road.

## OXFORD

13th. I.E.E.—“Modern telephone developments with particular reference to electronic techniques” by L. R. F. Harris at 7.0 in the Demonstration Room, S.E.B., 37 George Street.

## PORTSMOUTH

20th. I.E.E.—“Small signal measurements in nuclear electronics” by G. D. Smith at 6.30 at the College of Technology, Anglesea Road.

## READING

25th. I.E.E.—“Planning for the new TV services” by R. A. Dilworth at 7.30 at the Great Western Hotel.

## SOUTHAMPTON

12th. I.E.E.—Discussion on “Field effect devices” opened by Dr. R. E. Hayes at 6.30 at the University.

23rd. Instn. of Electronics.—“The high-quality reproduction of sound” by K. F. Russell at 2.0 at Nuffield Theatre, University of Southampton, Highfield.

## WOLVERHAMPTON

20th. I.E.R.E.—“Microelectronics” by Dr. J. W. Granville at 7.15 at Wolverhampton College of Technology.

# NEWS

---

## FROM

---

## INDUSTRY

### Domestic Manufacturers' Despatches.

—According to estimates issued by the British Radio Equipment Manufacturers' Association, the number of television sets despatched to the home market in the first nine months of last year totalled 1,280,000. This represents an increase of 205,000 on the same period of 1963 and 424,000 more than in the same period of 1962. Sound receiver despatches (including car radio) for the first nine months of 1964 totalled 1,710,000; 14% down on the corresponding period of 1963 and 11% less than the 1962 figure. Radiogram despatches to September totalled 184,000; exceeding the 1963 figure by 13% and the 1962 figure by 59%. Incidentally, these figures include sets sent to rental and relay companies.

The gross profit, before providing for depreciation of rental assets and for taxation, of **Robinson Rentals (Holdings) Ltd.** for the year ended 30th September, 1964, amounted to £2,315,906 compared with £1,909,841 for the previous financial year. Provision for depreciation of rental assets took £1,554,090 (£1,234,306) and taxation £208,261 (£250,615), leaving a net profit of £553,555 (£424,920).

**Mazda and Brimar Application for R.P.M.**—Thorn-AEI Radio Valves Tubes Ltd. have made application under the Resale Prices Act of 1964 for exemption from price decontrol for all of their valves, tubes and semiconductors marketed under the brand names Mazda and Brimar. The company also announces that their Scottish service depot, which handles dealers' claims on cathode ray tubes, has moved from 151 North Street to 517 Lawmoor Street, Glasgow, C.5. (Tel.: Glasgow SOUTH 5151.)

Orders worth nearly £1,000,000 have been placed by the Ministry of Defence for **Marconi self-tuning transmitting equipment.** This equipment is to be used by the Admiralty to modernize and expand parts of its world-wide h.f. communications network. Twenty-five 30 kW transmitters, special frequency generating equipment and a large number of drive channels incorporating transistor frequency synthesizers are to be supplied under these orders.

Owing to the increased demand for **Mullard transistors**, which are manufactured by the jointly owned Mullard-G.E.C. company Associated Semiconductor Manufacturers Ltd. (whose main plant is at Southampton), a semiconductor production line is to be set up at the Blackburn plant of Mullard Ltd. This will in no way affect the production of valves at the Blackburn plant, which is still at a high level and is expected to remain so for some years. Other recent extensions of the Mullard organization include expansion at the valve factory at Haydock in Lancashire, to allow the present staff of 300 to be increased to 400 in the next few months. This factory is one of six "feeders" carrying out assembly work on radio and television valves for the parent plant at Blackburn. The extension involves 26,500 sq ft.

The **Marconi Company** announces that a **Microelectronics Division** has been formed at Baddow, Essex, to exploit the techniques that have resulted from the company's research investment in this field. Mr. I. G. Cressell, former chief of the company's semiconductor physics group at Baddow, is the division's new manager.

A new division, known as the **Transmission Supplies Division**, has been established at Standard Telephones and Cables' new factory at East Kilbride in Scotland. This division will be responsible for making the mechanical parts for long-distance telephone, television and teleprinter transmission equipment. A substantial part of the division's job will be the manufacture of waveguide components.

Short-term leasing of scientific instruments and equipment is the primary function of the newly formed company **Scientific Rentals Ltd.**, of 84 Lower Mortlake Road, Richmond, Surrey. (Tel.: RICHmond 5656.) The company's directors are P. Goudime and K. B. Hogg.

**Osmor Radio Products Ltd.** have moved from their Crunden Road works in Croydon to new premises at 540 Purley Way, Croydon, Surrey. Their telephone number Croydon 5148 remains unchanged. The new factory covers an area of 65,000 sq ft and incorporates a new impregnation plant.

## From overseas

### Australia

Qantas, one of Australia's largest airlines, have decided to fit **Marconi Doppler navigation equipment** in their fleet of Boeing 707 aircraft operating the trans-Pacific route.

A number of **v.h.f. transistor radio-telephones** made by the Automatic Telephone and Electric Company are being used to link remote out-stations into Australia's telephone network. With these battery-operated units, subscribers

use conventional telephone installations, that allow them to dial directly into the system.

### Belgium

The capacity of an existing **underwater telephone cable**, linking the United Kingdom with Belgium, and its associated terminal equipment has recently been increased from 216 to 420 telephone circuits. This was carried out by Submarine Cables Ltd. and involved cutting the cable in two places, to insert transistor repeaters, and replacing the valve terminal equipment with transistor apparatus.

### Canada

Through its Canadian subsidiary, the English Electric Valve Company have received an order from Lenkurt Electric, of North America, for a number of **travelling-wave tubes** and associated mounts. Lenkurt Electric have an order from Alberta Government Telephones to build a radiotelephone system, containing 21 intermediate stations, between Lethbridge and Peace River.

The Canadian Westinghouse Company are to supply an accurate **aerial position sensor and error generator** for the closed-loop servo systems of an 85-ft dish aerial being built at the experimental communications ground station in Nova Scotia by the Department of Transport. The RCA Victor Company are main contractors for this project.

### Germany

The first **aircraft-noise monitor** to be used in Western Germany is now in operation at Frankfurt Airport. This equipment, which was developed by Rohde and Schwarz, automatically records the engine noise, heard in the surrounding residential areas, of aircraft landing and taking off. The installation comprises six fixed check points, a monitoring centre and a test van, and supplies the airport administration with a record of excess noise levels and their duration.

High performance **weather surveillance radar** from Decca has been installed in the University of Berlin by Telefunken A G and is now fully operational. Its coverage extends to Scandinavia and the Baltic in the north and to Austria in the south.

### Hungary

An order, through Elektroimpex Budapest, has been placed by the Hungarian civil airline Malev for a Decca Type AR-1 multi-purpose **air surveillance radar.** It is the first of its kind to be exported to eastern Europe and is to be installed at the Budapest international airport, Ferihegy.

The Austrian company Wiener Siemens Werke, who supplied the equipment for linking the programme studios, recording studios and a number of other facilities for Radio Budapest, have just completed a **switching centre** that will enable Radio Budapest to transmit up to six programmes simultaneously.

## Norway

The Norwegian Government is planning to set up five chains of **Decca Navigator stations** to cover the whole of the west coast of Norway, principally to help their fishing industry. The cost, including construction work, is estimated to be £2,500,000. Decca, of London, are to supply the electronic equipment for the transmitting stations and the marine Decca Navigator receivers are to be manufactured in Norway under licence.

## U.S.A.

Radiation Incorporated, of Melbourne, Florida, announce that the aerial system they have developed for the U.S. Air Force is now installed on the Air Force tracking ship "Twin Falls Victory." This apparatus is being used to track and receive telemetry data from the Mariner C spacecraft, which is on its way to Mars. Sensitive converter/receivers are used in the front end of the aerial system to convert the received S-band data from the spacecraft to 300-400 Mc/s. Nine of these were supplied under the \$1M contract.

Two contracts for **telemetry transmitters** have been awarded to Eitel-McCullough Incorporated by the Los Angeles Navy Purchasing Office. One calls for a 2-watt unit for operation at 2.2 to 2.3 Gc/s and the other for a 2.5-watt unit at 1.435 to 1.535 Gc/s.

## U.S.S.R.

Digital Measurements Ltd. have received an order for 27 **digital voltmeters** and associated spares from the Soviet Union. The value of this order is £20,400.

## Agencies and agreements

Superior Electric Nederland N.V., a wholly owned subsidiary of the American **Superior Electric Company**, have appointed Spectrum Electronics Ltd., of Deneway House, Darkes Lane, Potters Bar, Middx., as U.K. distributors.

Livingston Laboratories Ltd., of 31 Camden Road, London, N.W.1, have been appointed sole British representatives for the industrial products of the X-Ray Department of the **American General Electric Company**.

Painton & Company, of Northampton, announce the formation of a German subsidiary company, **Painton G.m.b.H.** It will operate from Wuppertal-Elberfeld.


Existing **Ferranti representation in France** by Compagnie d'Equipments de Regulation Automatique et de Mesure, of Paris, is to be extended to include process control equipment.

Ketay Ltd., of Eastern Avenue West, Chadwell Heath, Romford, Essex, have reached an agreement with **Harowe Servo Controls Incorporated**, of Pennsylvania, whereby they become the sole distributors for the Harowe range of servo products in this country, Europe and the Commonwealth.



# THE HOUSE OF BULGIN AT YOUR SERVICE


## FOR UNFAILING QUALITY! ELECTRICAL EFFICIENCY! BULGIN FUSEHOLDERS




List Nos. F.296 and F.297.



List No. F.180.




List Nos. F.26/3, F.26/2.



List No. F.119.

### UNIQUE SINGLE-POLE NEON FUSEHOLDER



List No. D.F.826/V.  
Patent Number 930330.  
U.S.A. Patent Applied No.186/676.

Manufacturers of the largest range of Fuseholders of proven reliability for 5 mm. x 20 mm. —  $\frac{3}{16}$  in. x  $\frac{1}{2}$  in. —  $\frac{1}{4}$  in. x  $\frac{1}{2}$  in. —  $\frac{1}{4}$  in. x  $\frac{1}{2}$  in. —  $1\frac{1}{2}$  in. x  $\frac{1}{2}$  in. FUSES. Their reputation stands high in the estimation of critical engineers who have had utmost faith in them for many years.

- ★ OPEN TYPES  
(SINGLE, DOUBLE & TRIPLE POLE)
- ★ MOULDED TYPES  
(OPEN OR COVERED)
- ★ WIRED-IN-FLEX TYPES  
(METAL OR MOULDED)
- ★ PANEL-MOUNTING TYPES
- ★ PRINTED CIRCUIT TYPES
- ★ BAYONET CAP TYPES
- ★ DELIVERY MOSTLY FROM STOCK

"WHEN IT BLOWS IT GLOWS"

Instant indication of blown fuses allowing quick replacement when used in multiples.

**A. F. BULGIN & CO. LTD.,**  
Bye Pass Rd., Barking, Essex.  
Tel: RIPpleway 5588 (12 lines)

MANUFACTURERS AND SUPPLIERS OF RADIO AND ELECTRONIC COMPONENTS TO

ADMIRALTY	MINISTRY OF WORKS	B.B.C.
WAR OFFICE	MINISTRY OF AVIATION	G.P.O.
AIR MINISTRY	MINISTRY OF SUPPLY	I.T.A.
HOME OFFICE	RESEARCH ESTABLISHMENTS	N.F.L.
CROWN AGENTS	U.K.A.E.A.	D.S.I.R.

1WW-123 FOR FURTHER DETAILS.

## The Great Electronics Myth

IN the December issue the Editor, no doubt inspired by a Scroogian spirit of anti-Christmas, put a particularly bellicose cat among some peculiarly inoffensive pigeons by calling for a fully embracing definition of the term "electronics."

At first thought the requirement hardly seems to exist. Everybody knows what electronics is. It's—er—well—it's anything to do with radio transmitters or receivers or television cameras or studio equipment in general, or record players or aerials or computers or hearing aids or—and so on through a very lengthy list. It is not until one searches for some sort of common denominator that the Editor's Machiavellian purpose begins to show.

You will have noticed that while he has drawn our attention to various definitions of electronics, he has been careful not to add one of his own. This, of course, is not because he has not got one, but because editors as a race run contrary to the precepts of King Solomon, digging pits into which they fall not and rolling stones which return not upon them. It is a gambit which is technically known as "stirring up the correspondence columns." And as this particular pit, stone or topic is one which is guaranteed to estrange brother from brother, husband from wife and Group Leader from Section Leader, I have no doubt that the P.M.G. is at this moment reaping a rich harvest of postal dues. Not until the spate of letters falls to a trickle will the Editor spring his own contribution and thereby put us mere electronics wage slaves to shame by its wisdom.\*

But to the task. A definition. My dictionary tells me that electronics is "a branch of physics dealing with electrons and other elementary particles (protons, neutrons, etc.) that constitute matter." There is no mention of industry here, and just as well, too, for matter being what it is, every industry under the sun would qualify for an electronics label.

So let us turn to the British Standard definition, to wit:—"Electronics. That branch of science and technology which deals with a study of the phenomena of conduction of electricity in a vacuum, in a gas and in semiconductors, and with the utilization of devices based on these phenomena."

This on the face of it seems to answer all requirements out of hand. But does it, on sober reflection? For a start, its "conduction in a gas" clause seems to bring MHD generation into the field of electronics, so we are liable to find ourselves working for the C.E.G.B. any moment now.

### Other Components

Again, it seems to me to be based on the dubious assumption that the valve or transistor is the all-important component in any given circuit. Certainly, no equipment would function without it, but then, neither would it if any of the other components were removed. Would you accept it as logical if the motor industry called itself the carburettor industry on the grounds that this was the key device in a petrol engine?

On a quick check over the circuit diagram of a typical domestic television receiver I find that it uses 156 resistors, 128 capacitors, 76 inductors, 17 miscellaneous devices, 18

valves and 7 semiconductor diodes. If my arithmetic is correct, this gives a total of 402 components, of which 377 are electrical and only 25 qualify as truly electronic. Add to the former the great number of point-to-point connections involved, and our so-called electronic equipment turns out to be a vast ocean of electrical engineering in which are disposed a few islets of electronics. Government by minority indeed!

An impartial, unconditioned observer would surely record that only the valve and semiconductor boys comprise the true electronics industry, and the rest of us are outsiders with, at best, our noses over the fence. If this is the case, then there is no point in arguing over definitions until we are sure of what we are defining; after all, ours is allegedly a science and as such it should employ exact terminology.

### Presumptive Parentage

I humbly submit that "electronics" as a title has no hem to its garment and is the unlawful father of such anachronisms as "Radio and Electronic Manufacturers," "Radar and Electronics" and so on, with which our lives are bestrewn. So, please, let us throw the impostor overboard with a large lump of semiconductor tied to his valency bond and try again with something we can honestly live with.

Perhaps the rather unpleasant truth is that because of our growth we have given ourselves over-many airs. At any rate, we seem curiously reluctant to admit that, when it comes down to brass tacks, we are electrical engineers and that all the multifarious activities which we have classified as "electronics" are only off-shoots from the main stem.

A parallel case exists in medicine, where specialists abound. But between the neurologists and gynaecologists and all the other -ologists made any attempt to find a definitive umbrella under which to shelter? No; they are content to regard themselves as members of the medical profession, and have thereby kept sane. Why, then, should we find it any more essential to set ourselves apart than they? We, too, have our specialist labels for ready identification as occasion demands, and these should surely suffice.

In the event, if we are realistic about the matter, we seem to have no option but to accept the fact that it is virtually impossible to devise a definition which covers each and every one of our activities, much less a single descriptive word. And, as the Editor has pointed out by quoting Professor Everitt, even if the perfect solution were found today it would be outdated by tomorrow. So why bother, except to set our house in order by relegating the expression "electronics" to its rightful place as the specialist label for the valve and semiconductor people, so that for the first time such terms as "Radio and Electronics" make scientific sense.

But if the worst comes to the worst and we still remain too stiff-necked to accept ourselves as specialist electrical engineers, perhaps we might take the opportunity to pay a tribute to one or other of the early researchers who set in motion the chain of events which placed us on our purgatorial path? How, for instance, would you like to be described as a Hertzian engineer? It certainly would evade the "descriptive word" issue but resurrects the definition boggy again.

No, on balance I don't think it's worth it.

\*The one I like best is "Electronics. Anything electrical which I don't understand"—Ed.

Only **10** seconds

for a  
permanent  
print!



Proudly  
Announce

**AVO-BEATTIE-COLEMAN**

## OSCILLOSCOPE CAMERAS

... A range of instruments covering the entire field of Oscilloscope photography. Polaroid processing backs are standard on most models and these give you finished prints literally within ten seconds. No other equipment and no experience are needed.

Camera Model MII 565, for recording ultra-high-speed nanosecond traces. Has 1:1 object/image ratio and an 86 mm. f/1.2 Navitar lens which is exclusive to A-B-C. When used with the fastest Polaroid film, this remarkable lens gives recording speeds never before obtained with standard equipment.

35 mm. film is used in Model KD5 for rapid sequence recording or for continuous "streak" recording. There is also a dual-purpose model with a 35 mm. magazine for high-speed "streak" recording and a Polaroid unit for transient and repetitive phenomena.

Ask AVO for full details or a demonstration.

**AVO LTD**

AVOCET HOUSE, 92-96 VAUXHALL BRIDGE ROAD, LONDON, S.W.1  
IN NORTH AMERICA: BEATTIE-COLEMAN INC., ANAHEIM, CALIFORNIA.

Victoria 3404 (12 lines)

**M**  
GROUP





Model K5 (illustrated) is surprisingly inexpensive although it has a fast f/1.9 lens, a multi-speed shutter, and is suitable for both repetitive and single shot transient waveforms. An additional "Lensette" converts the K5 for photographing diagrams, circuit breadboards and other laboratory subjects. Interchangeable backs provide for Polaroid roll or flat pack film, or for 4in. x 5in. cut film. Engineers throughout the world specify K5 because of its low cost, ease of use and superior performance.

Check these K5 Features:—

- ★ Adjustable ratio 1:0.9, 1:0.7.
- ★ Multiple exposures, up to 13 on one frame.
- ★ Parallax-free view of C.R.T. during set-up.
- ★ Records written data on film (optional).
- ★ Swing-away, lift-off mounting (optional).
- ★ Lensette attachment for off-scope pictures.
- ★ 10-second developing with Polaroid film.
- ★ Film speeds up to ASA 10,000.
- ★ Choice of lenses, f/1.9 or f/4.5.
- ★ Complete cameras from £139.

A.B.C. cameras are joint products of Avo Ltd. and Beattie-Coleman Incorporated of California. They are fully guaranteed and backed by Avo Service.

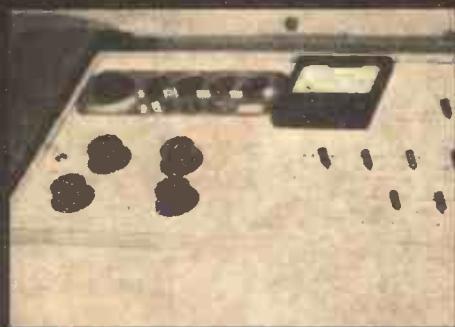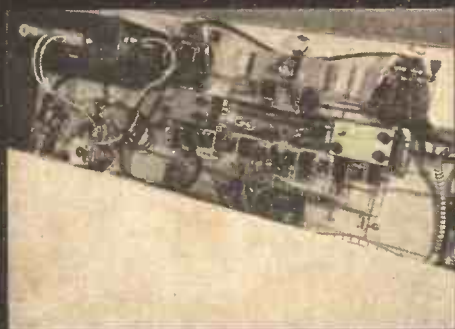

\* 100 volt signal to line?  
 . . . . . 25 ohm output?  
 bridging monitor for  
 600 ohm line? . . . . . 230  
 volt signal output?  
 . . . . . variable correc-  
 tion unit? . . . . . 1 ohm  
 output? . . . . . 30/64  
 ohm output? . . . . .  
 special input sockets?  
 . . . . . rack and panel  
 mounting? . . . . .  
 50 volt line? . . . . . or  
 simply to enjoy good  
 quality reproduction of  
 music in your own  
 home to the same  
 professional  
 standards?

\* these are some of the  
 variations of the versatile  
 QUAD supplied to  
 professional users throughout  
 the world.

**QUAD** for the closest approach to the original sound

Send postcard for illustrated literature to:—

**THE ACOUSTICAL MANUFACTURING CO. LTD., HUNTINGDON. Tel 361.**

# ANOTHER STEP FORWARD


along the international highway

THE NEW

## International

## AvoMeter

MODEL **9** Mk II

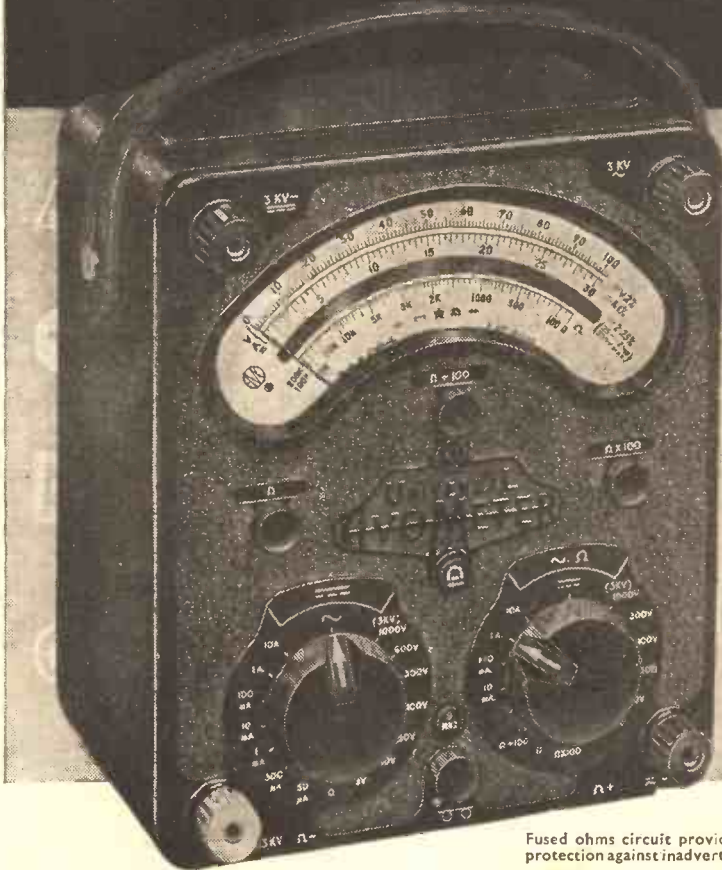

The clearly marked scale has uniformly divided graduations to match 100 and 30 scale markings.



International symbols are used on panel and scale-plate for the convenience of those unfamiliar with English language and symbols.



**OTHER NEW FEATURES:**

Fused ohms circuit provides increased protection against inadvertent overload.

Improved temperature coefficient over whole range. Now measures up to 400 amps d.c. with the aid of a range of d.c. shunts.

Write for fully descriptive leaflet

**AVO LTD**

AVOCET HOUSE, 92-96 VAUXHALL BRIDGE ROAD, LONDON, S.W.1. Victoria 3404 (12 lines)



1W-008 FOR FURTHER DETAILS.

and **Now-**  
*a Fully Transistorised*  
*Walkie-Talkie!*



**Bantam**  
 TWO-WAY RADIOTELEPHONE



*Once again in  
 the tradition of  
 the outstanding  
 Cambridge and  
 Vanguard Radio-  
 telephones, Pye  
 have produced the  
 Bantam, a brilliant  
 fully transistorised  
 Walkie-Talkie.*

- Fully transistorised Transmitter and Receiver
- Long endurance with Rechargeable or Dry Batteries
- Reliability and accessibility of components
- Lightweight 4 lbs. (1.82 kg.)
- Approved by G.P.O. to spec. W6345
- Crystal Filter selectivity
- Very high performance Receiver
- Frequency Band 25-174 Mc/s.
- Weatherproof

Tel: TEVERSHAM 3131

**PYE TELECOMMUNICATIONS LTD. CAMBRIDGE, ENGLAND** • Telex No. 81166

1W W-009 FOR FURTHER DETAILS.





# SINGLE SIDEBAND

RADIOTELEPHONE  
SSB 125

*The world's most competitive Single Sideband Radiotelephone — the SSB 125 is suitable for fixed or mobile operation and is the most economic equipment for long distance communication available today.*



**Features**

- 125 watts p.e.p. output
- 4 switched channels
- Transistor DC or AC power pack
- Crystal filter selection of sidebands

**PYE TELECOMMUNICATIONS LTD.**  
**CAMBRIDGE · ENGLAND**  
 Telephone: Teversham 3131

# New range of MODULAR STATIC INVERTERS

## 1 kVA-60 kVA. Full output at mains frequency in less than 200 milliseconds

**Mains failure** can be expensive—even dangerous—if essential supplies to vital instrumentation and services are disrupted. The surest protection against this failure is provided by a new range of *modular* static sinewave and squarewave inverters by G.E.C. Electronics.


MODULAR CONSTRUCTION of these inverters keeps costs low—enables systems to be provided quickly for any output up to 60 kVA.

G.E.C. STATIC INVERTERS store little energy—give faster response than rotary devices.

### TYPICAL APPLICATIONS

- \* Essential instrumentation
- \* Conversion of d.c. mains to a.c.
- \* Communications equipment
- \* Computers
- \* Standby Fluorescent lighting
- \* Under-crane lighting

**These new static inverters give full output at mains frequency in less than 200 milliseconds with output voltage within 5% of steady value.**

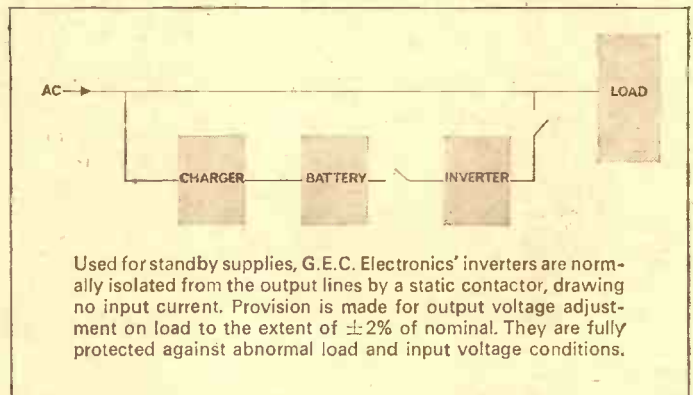

Used for standby supplies, G.E.C. Electronics' inverters are normally isolated from the output lines by a static contactor, drawing no input current. Provision is made for output voltage adjustment on load to the extent of  $\pm 2\%$  of nominal. They are fully protected against abnormal load and input voltage conditions.

### SEND COUPON FOR DETAILS

To G.E.C. (Electronics) Ltd, Power Electronics Dept, Industrial Division,  
East Lane, Wembley, Middx. Telephone: ARNold 4353

I am interested in using Inverters for \_\_\_\_\_

Please send technical information on G.E.C. Electronics' Inverters.

NAME \_\_\_\_\_

POSITION \_\_\_\_\_


COMPANY \_\_\_\_\_

ADDRESS \_\_\_\_\_

I.W 9

## RELIABLE RELAYS

# 10 days delivery

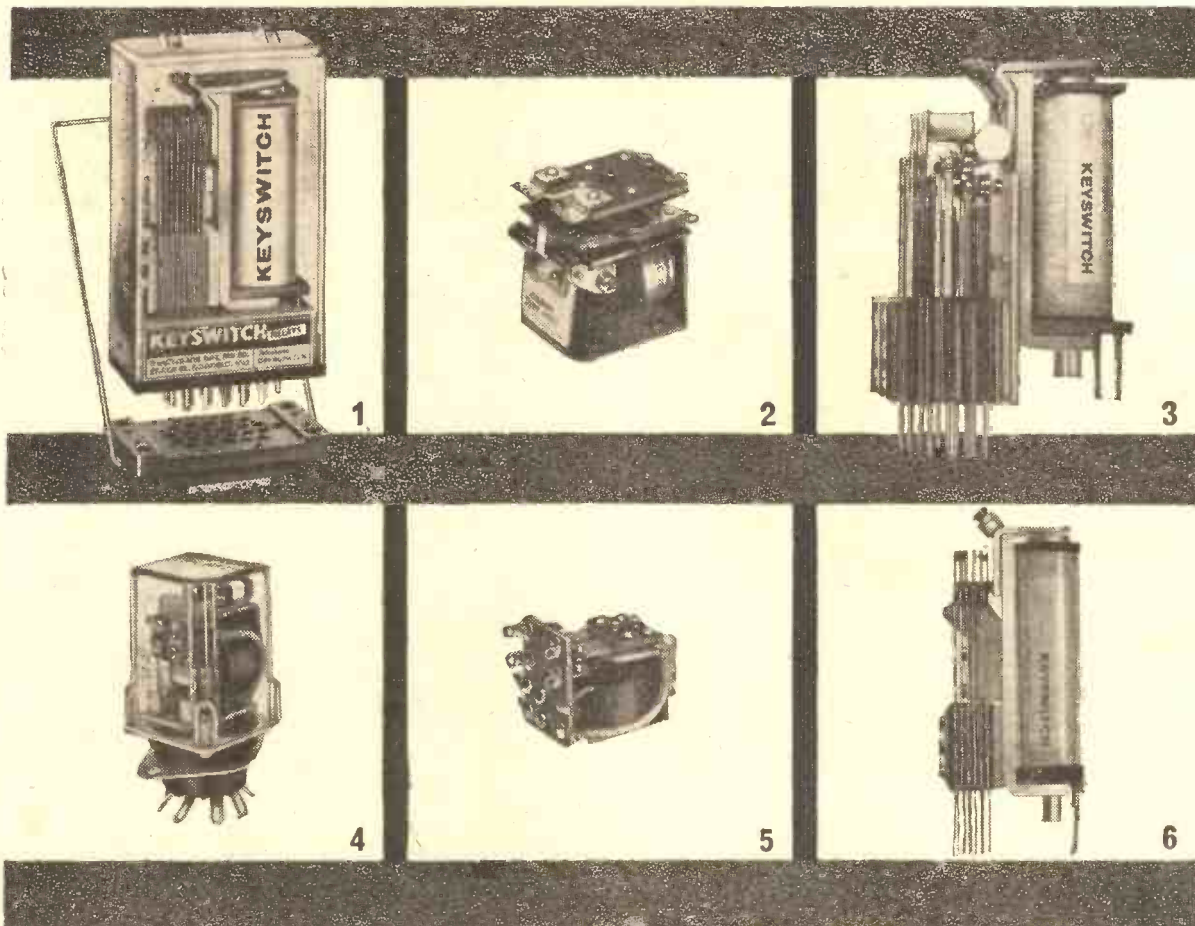

# KEYSWITCH

Precision relays fully electrically and mechanically tested to exact specification. You can trust them for many purposes, industrial and electronic, and for all kinds of conditions. B.P.O. types by Keyswitch and miniatures by Omron, from milliamps to 30 amps per contact. Operating coils from less than 1v to 200v d.c. and 6v to 440v a.c.

For full details of **KEYSWITCH** and **KEYSWITCH OMRON GOLD** relays contact:

1. **KEYSWITCH (P-33)** Plug-in 3000 type relay. C.E.G.B. approved. Many variations available.
2. **KEYSWITCH OMRON GOLD MM2.** Power relay 110v and 230v AC/DC. Up to 4 pole c/o at 15 amps. Switch box mounting.
3. **KEYSWITCH K700** type relay. 15-30 amps for high current/high voltage applications.
4. **KEYSWITCH OMRON GOLD MK2P.** Midget power relay up to 230v AC/DC. Plug-in octal base.
5. **KEYSWITCH OMRON GOLD MK2.** Midget power relay—smallest of the power series. Up to 3 pole c/o 7.5 amps.
6. **KEYSWITCH B.P.O. 600** type minor relay. Small size coupled with higher switching speeds.

**KEYSWITCH RELAYS LTD**

Cricklewood Lane, London, N.W.2. Tel: GLAdstone 1152

The Quality Kit-Sets



Anyone can build

## INSTRUMENTS FOR LABORATORY, TEST, SERVICE AND HOME WORKSHOP



### 5in. Flat-face GENERAL PURPOSE OSCILLOSCOPE Model 10-12U

An outstanding new 'scope

"Y" sensitivity 10 mV, r.m.s. per cm. at 1 kc/s. bandwidth 3 c/s.-4.5 Mc/s. Frequency compensated input attenuator X1, X10, X100. T/B, 10 c/s.-500 kc/s. in 5 steps. Two extra switch selected pre-set sweep frequencies in T/B, range. T/B, output approx. 10-v. peak to peak. Built-in IV calibrator. Facility for "Z" axis modulation. Electronically stabilised power supply. Power req. 200-250 v. A.C., 40-60 c/s., 80 watts. Fused. Front panel silver and charcoal grey. Cabinet, charcoal grey, size 8½ x 14 x 17in. 56-page construction and operation manual.

deep. Net weight 23lb.  
Kit ..... £32.12.6 Assembled £41.10.0

### TV ALIGNMENT GENERATOR

#### Model HFV-1

Designed to offer the maximum in performance, flexibility and utility at the lowest possible cost. Frequency coverage 3.6 Mc/s. to 220 Mc/s. on fundamentals. Unique non-mechanical sweep oscillator system. High level output on all ranges. Sweep deviations up to 42 Mc/s. Built-in fixed and variable marker generators. (5 Mc/s. crystal supplied.) Power requirements: 110/200-250 v. A.C., 50 watts. Size 13 x 8½ x 7in.

Kit ..... £34.18.0 Assembled £44.10.0



### De Luxe 6in. VALVE VOLTMETER Model 1M-13U

Modern styling. Extra features. The ideal VVM for the Electronic Engineer. 6in. Ernest Turner 200μA. meter with multi-coloured scales. Unique gimbal bracket allows bench, shelf or wall mounting. Measures A.C. (r.m.s.), D.C. volts 0-1.5, 5, 15, 50, 500, 1,500. Resistance range 0.1 to 1,000MΩ with int. battery. Vernier-action zero and ohms adjustment. Roller-tinned printed circuit. High input resistance (11MΩ). Comprehensive assembly and operation manual. Size 5 x 12½ x 4½in. Complete with test prod and leads.

Kit ..... £18.18.0 Assembled £26.18.0  
H.T. and R.F. Probes available as optional extras.



### R.F. SIGNAL GENERATOR

#### Model RF-1U

Provides extended frequency coverage in six bands from 100 kc/s. to 100 Mc/s. on fundamentals and up to 200 Mc/s. on calibrated harmonics. Six large dial scales allow precise frequency settings. Modulated or unmodulated R.F. output of at least 100 millivolts. 400 cycle audio signal with 5 volt output. Pre-aligned coil and band switch assembly for ease of construction.

Kit ..... £13.8.0 Assembled £19.18.0



## OUTSTANDING EQUIPMENT FOR THE "AMATEUR" & SHORT WAVE LISTENER

### GENERAL COVERAGE RECEIVER

#### Model RG-1

An inexpensive communications type receiver designed for the discriminating short wave listener. Frequency coverage 32 Mc/s. to 1.7 Mc/s. in 5 ranges, plus the MW band of 1,500 kc/s. to 600 kc/s. Modern design techniques and special frame grid valves secure a high standard of performance. Image rejection and signal-to-noise ratio are exceptionally good. Each of the six bands is separately calibrated on a large slide-rule dial. The Coil Pack and IFTs are pre-assembled and aligned ready for use. Special features include: Half-lattice crystal filter; Variable noise limiter; Voltage stabilised oscillators.

Kit ..... £39.16.0 Assembled £53.0.0



### AMATEUR BANDS RECEIVER Model RA-1

This receiver is designed as an ideal economically priced fixed station, portable or mobile receiver covering the amateur bands from 160-10 m., each band separately calibrated on a large illuminated slide-rule dial. Approx. 5in. bandspread on each band. Features: Signal Strength (tuning) "S" meter, front panel dial calibration control, provision for a 100 kc/s. calibrator, tuned R.F. amplifier stage, half-lattice filter, adjustable noise limiter. Excellent electrical and mechanical stability. Frequency coverage: 160, 80, 40, 20, 15, 10 metre bands. I.F. 1620 kc/s. Sensitivity: 2μV for 10 dB S/N, image rej. 40 dB. Power requirements: 110-240 v. A.C. 40-60 c/s. (Provision for external P.S. for mobile use.) Size 13½in. wide x 6½in. high x 10½in. deep.

Kit ..... £39.6.6 Assembled £52.10.0



## A WORLD OF ENTERTAINMENT FOR THE FAMILY

### A WELL DESIGNED F.M. TUNER Model FM-4U

Tuning range 88-100 Mc/s. Flywheel tuning. Attractive Plastic Front Panel in two-tone grey with golden trim surround and motif. Thermometer type visual tuning indicator. Pre-aligned. I.F. transformers. Three I.F. stages. Wide-band low distortion Ratio Detector. R.F. Unit, wired, tested and pre-aligned. Printed circuit for I.F. Amplifiers and Ratio Detector. Built-in power supply. Output sockets for stereophonic adaptor (for stereo transmission when available).

TUNER UNIT Model FMT-4U with 10.7 Mc/s. I.F. output, £2.15.0 (inc. P.T.). I.F. AMPLIFIER and power supply Model FMA-4U complete with case and valves, £13.3.0. Sold separately.

Kit Total ..... £15.18.0  
Assembly can be arranged on your behalf.



### "OXFORD" LUXURY TRANSISTOR PORTABLE Model UXR-2

This superb transistor radio is the ideal domestic or personal portable Medium and Long Wave receiver. Solid leather case and handle. Easy-to-read tuning scale. Extra large loudspeaker. Push button L, MW and tone. 10 semi-conductors (7 transistors plus 3 diodes). Sockets for personal earphone, tape recorder, car aerial. Internal 9-volt battery (not supplied), lasts for months. Latest printed circuit techniques. Comprehensive, easy-to-follow, fully illustrated Instruction Manual.

Kit ..... £14.18.0 incl. P. Tax  
Assembly can be arranged on your behalf.



# DAYSTROM LTD.

DEPT. W.W.1, GLOUCESTER, ENGLAND

MANUFACTURERS OF KIT-SETS FOR EVERY INTEREST—HOME, SERVICE, WORKSHOP, LABORATORY, ETC.

So easy to build

**Heathkit**

DAYSTROM

So easy to use

**AMERICAN HEATHKIT SINGLE SIDE-BAND EQUIPMENT**

Full details of the SSB models gladly sent on request

**80-10M RECEIVER Model SB-300E**

This de luxe receiver offers unsurpassed value to the radio amateur. Of advanced design, employing up-to-date construction techniques, its specification ensures unparalleled performance. Size 14½ x 6½ x 13½in. Full details on request.

Kit (less speaker) **£133.14.0\***

A fitting companion to this receiver is the Model

**SB-400E TRANSMITTER**

Kit **£165.4.0\***

**3in. MONITOR 'SCOPE Model HO-10E**

A must for the SSB enthusiast. Gives at-a-glance visual indication of your transmitted signal and incoming signal displaying envelope patterns. Built-in two-tone generator ensures a clear output signal. Power req. 115-230 v. A.C.

Kit **£34.10.0\***

\*An additional importation levy is now chargeable on American models.



SB-400E



SB-300E

**5 W STEREO AMPLIFIER KIT Model S-33**




A versatile high-quality self-contained STEREO/MON-AURAL Amplifier with adequate output for a living room. Can be used to convert a favourite (monaural) radiogram into a stereo-radiogram. 3 watts per channel: 0.3% distortion at 2.5 w/channel; 20 dB N.F.B., inputs for Radio (or Tape) and Gram, Stereo or Monaural; Ganged controls. Sensitivity 200 mV.

Kit **£13.7.6**

Assembled **£18.18.0**

**6 W HI-FI STEREO AMPLIFIER KIT Model S-33H**



An inexpensive stereo-mono amplifier with the high sensitivity necessary for lightweight miniature ceramic pick-ups (e.g., Decca Deram). De luxe version of the S-33 with attractive two-tone grey Perspex panel.

Kit **£15.17.6**

Assembled **£21.7.6**

**5 W HI-FI MONO AMPLIFIER KIT Model MA-5**



A low-priced general purpose Hi-Fidelity amplifier based on the popular S33 for those who do not require a stereophonic system. Separate bass and treble controls. Gram and Radio inputs. Suitable for most crystal pick-ups. A printed circuit simplifies construction.

Kit **£10.19.6**

Assembled **£15.10.0**

**HI-FI MONO POWER AMPLIFIER KIT Model MA-12**




A compact high fidelity power amplifier (including auxiliary power supply). 12 watts output. Wide frequency range and low distortion. A variable sensitivity control is fitted enabling it to be used with an existing amplifier in a stereophonic system. Other applications include sound reinforcement systems, transmitter modulators, for use with tape recorders, also as a general purpose laboratory amplifier.

Kit **£11.18.0**

Assembled **£15.18.0**

**STEREO-HEAD BOOSTER KIT Model USP-1**




Hi-Fi Stereo Pre-amplifier for low-output Hi-Fi P.U.s input 2 mV. to 20 mV. Output adjustable from 20 mV. to 2 V. 40-20,000 c/s. Also suitable as low-noise R.C.-coupled amplifier.

Kit **£7.7.6**

Assembled **£10.9.6**

**STEREO CONTROL UNIT KIT Model USC-1**



Incorporates all worthwhile features for high fidelity stereo and mono. Push-button selection, accurately matched ganged controls to ±1 dB. Negative feedback rumble and variable low-pass filters. Printed circuit boards. Accepts inputs from most tape-heads and any stereo or mono pick-up.

Kit **£19.10.0**

Assembled **£26.10.0**



**PUBLIC ADDRESS AMPLIFIER KIT Model PA-1**

This is a multi-purpose, high output, compact unit suitable for vocal and instrumental groups, guitars, electronic organs, etc. 4 inputs for guitars, mics., record players. Has many features found only in expensive equipment, i.e., 50 watt R.M.S. output, two heavy duty speakers. "Magic Eye" vol. indicator, variable tremolo, elegant cabinet.

Kit **£54.15.0**

Assembled **£74.0.0** (Legs 17/6 extra)



**"MALVERN" HI-FI EQUIPMENT CABINET KIT**

AN ATTRACTIVE CABINET in modern style designed to house all your Hi-Fi equipment (including tape deck and full-sized transcription record player). The cabinet parts are veneered and pre-drilled, with edging in Panoplex plastic strip for ease of finishing. Complete with everything you need for assembly, including screws, hinges and even a padsaw! Left "in the white" for finishing to choice. Size 39½ x 32 x 21½in.

Kit **£18.1.0** (inc. P.T.)

Assembled **£23.6.0**



**"GLOUCESTER" HI-FI CABINET KIT**

Will accommodate: Tape Deck and/or Record Player. F.M. Tuner and Stereo Amplifier. For those with limited floor space a speaker system can be housed at one end. For this purpose a loud-speaker kit comprising one 4in. plus 8in. speaker systems, balance unit, speaker grille, cutting template, padsaw and mounting details is also available. Neutral hardwoods have been carefully selected so that the finished product can be stained and polished to individual choice. There is storage space for records, etc., also for power amplifiers. Dimensions: length 46½in., height 30in., depth 21in.

Mk. I for Tape Deck or Record Player

Kit **£17.3.6** (inc. P.T.)

Assembled **£22.8.6**

Mk. II for both T/D and R/P

Kit **£18.10.0** (inc. P.T.)

Assembled **£23.15.0**

**INTERNATIONAL MAIL ORDER SCHEME**  
Covering the American Heathkit range of 250 models

Direct from U.S.A. to your U.K. address. Illustrated American catalogue and full details can be obtained from us for 1/- post paid.

Deferred Terms available on orders above £10

**MONO CONTROL UNIT KIT Model UMC-1**

Ideal for use with MA-12 or similar amplifier. Output 0.25 v. Send for full details.

Kit **£8.12.6**

Assembled **£13.12.6**

**HI-FI STEREO AMPLIFIER KIT Model S-99**

Gives 18 w. output (9 per channel with 0.2 per cent. distortion at 9 w. per channel) It has ganged controls. STEREO/MON-AURAL gram., radio and tape recorder inputs and push-button selection as well as many other first-class features well above its price range. In grey metal cabinet with a golden surround and Perspex panel. Also ultra-linear push-pull output. Printed circuit construction.

Kit **£27.19.6**

Assembled **£37.19.6**

**HI-FI SPEAKER SYSTEM KIT Model SSU-1**

Ducted-port bass reflex cabinet "in the white." Frequency response is 40-16,000 c/s. Power rating 25 watts. Matched speaker units 8in. high flux (12,000 lines) with hyperbolic cone and 4in. wide angle dispersion type for higher frequencies.

Kit (with legs) **£11.12.0**

(Less legs) **£10.17.6**

(inc. P.T.)

**"COTSWOLD" SPEAKER SYSTEM KIT**

This acoustically designed enclosure measures 26 x 23 x 14½in., and houses a special 12in. bass speaker with 2in. speech coil, elliptical middle speaker together with a pressure unit to cover the full frequency range of 30-2,000 c/s. Its polar distribution makes it ideal for really Hi-Fi Stereo. Delivered complete, with speakers, cross-over unit, level control, grille cloth, etc. Left "in the white" for finish to personal taste, all parts are pre-cut and drilled for ease of assembly.

Kit **£23.4.0**

Assembled **£30.15.0**

**"COTSWOLD M.F.S." SPEAKER SYSTEM KIT**

This model, based on the standard Cotswold, measures only 36in. high, 16½in. wide by 14in. deep. Particularly recommended to those who require the best results in small rooms.

Kit **£23.4.0**

Assembled **£30.15.0**

**TELEPHONE AMPLIFIER KIT Model TTA-1**

For home, office or shop. Kit **£7.9.6** Assembled **£11.15.0**

**DAYSTROM LTD.**

DEPT. W.W.I, GLOUCESTER, ENGLAND

MANUFACTURERS OF THE WORLD'S LARGEST-SELLING ELECTRONIC KIT-SETS

A subsidiary of the Weston Instruments Group.

**Technically**



**excellent**

### MULTIMETER KIT Model MM-1U

Provides wide voltage, current, resistance and dB ranges to cover hundreds of applications. Sensitivity 20,000 ohms/volt D.C. and 5,000 ohms/volt A.C. Ranges: 0-1.5 v. to 1,500 v. A.C. and D.C.; 0-150μA. to 15 A. D.C. Measures resistance from 0.2Ω to 20MΩ. 4½ in. 50μA meter. A polarity reversing switch eliminates transferring test leads when alternately measuring + and - voltages. Uses standard commercial batteries.



Kit £12.18.0 Assembled £18.11.6

### ELECTRONIC SWITCH KIT Model (Oscilloscope Trace Doubler) S-3U

This device will extend the use of your single-beam oscilloscope and at a nominal cost, will give you the advantages of a double (or other multiple) beam 'scope, while retaining all the advantages of your present single beam instrument.

Hitherto an electronic switch of this nature, permitting the simultaneous observation of two signals on the screen of a single-beam C.R.T. oscilloscope, has cost nearly as much as the 'scope itself.

Kit £12.18.0 Assembled £18.10.0

### DECADE RESISTANCE BOX KIT

Model DR-1U. Range 1-99,999Ω in 1Ω steps. Ceramic switches throughout. Current rating from 500 mA. to 5 mA. according to decades in circuit. Polished wooden cabinet supplied complete.

Kit £10.8.0 Assembled £14.8.0

### RESISTANCE-CAPACITANCE BRIDGE KIT Model C-3U

Measures capacitance 10pf. to 1,000μF. Power factor and resistance 100Ω to 5M ohms. Test voltages 5-450 v. Safety switch provided. Kit £10.10.0 Assembled £16

### AUDIO SIGNAL GENERATOR KIT Model AG-9U

10 c/s. to 100 kc/s., switch selected. Distortion less than 0.1%. 10 v. sine wave output metered in volts and dB's.

Kit £22.10.0 Assembled £30.10.0

### AUDIO VALVE MILLIVOLTMETER KIT Model AV-3U

A very sensitive meter with high stability. 1 mV. to 300 v. A.C. The frequency response is virtually flat up to 100 v. f.s.d. within ±1 dB from 10 c/s. to 400 kc/s. 200μA. moving coil meter.

Kit £16.10.0 Assembled £22.18.0

### AUDIO WATTMETER KIT Model AW-1U

This popular meter is used in many recording studios and broadcasting stations as a monitor as well as for servicing purposes. Dissipation rating up to 25 w. continuous. 50 w. intermittent.

Kit £17.5.0 Assembled £23.18.0

### A.M./F.M. TUNER KIT

Tuning range 88-108 Mc/s. (FM) 16-50, 200-550, 900-2,000 m. Flywheel tuning. Attractive Perspex front panel in two-tone grey with golden trim. Thermometer type tuning indicator, pre-aligned I.F. transformers. Switched wide and narrow A.M. bandwidths.




TUNING HEART Model AFM-TI £4/13/6 (inc. P.T.) I.F. AMPLIFIER and Power Unit Model AFM-A1. Complete with metal cabinet and valves £21/16/6. Sold separately.

Kit Total £26.10.0

### DUAL-WAVE TRANSISTOR PORTABLE RADIO KIT Model UXR-1

Presented in elegant real hide case with tasteful gold relief. Can be assembled in 4 to 6 hours and you have a set in the top flight of transistor portables. Pre-aligned I.F. transformers, printed circuit and a 7in. x 4in. high flux speaker.



Covers both Long and Medium waves. Dimensions 9½ in. x 7½ in. x 3½ in.

Kit £12.11.0 (inc. P.T.)

### 4-wave TRANSISTORISED PORTABLE RADIO KIT Model RSW-1

Using 7 latest type transistors and three diodes this highly sensitive set is specially designed for Short and Medium wavebands (200-550, 90-200, 20-40 and 11-16 m.). An internal ferrite aerial is provided for medium wave and a car aerial socket is also fitted. Housed in an elegant leather case with retractable whip aerial this set will receive broadcasts from all over the world.



Kit £19.17.6 (inc. P.T.)

### JUNIOR TRANSISTOR RADIO KIT Model UJR-1

A dual-wave headphone receiver for use with external aerial and ear. Specially designed as a practical introduction to radio and electronics and is particularly suitable for absolute beginners. Kit £2.7.6 (inc. P.T.) Additional Amplifier Stage UJR-IS, 16/6.



### ELECTRONIC WORKSHOP KIT Model EW-1

20 exciting experiments can be made with this one kit. Transistor Radios, Intercom. Sets. Burglar Alarm etc. A 72 page illustrated manual is included. Ideal for the junior experimenter. Kit £7.13.6 (inc. P.T.)

TAPE DECKS are available as "packaged deals" with other equipment. Details on request.

### Money-back Guarantee

Daystrom Limited unconditionally guarantee that each Heathkit model assembled in accordance with our easy-to-understand instruction manual must meet our published specifications for performance or the purchase price will be cheerfully refunded.

Deferred Terms available on all orders above £10.

### 4½ in. VALVE VOLTMETER KIT Model V-7A

The world's most popular valve voltmeter, with printed circuit and 1 per cent. precision resistors to ensure consistent laboratory performance. It has 7 voltage ranges measuring respectively D.C. volts to 1,500 and A.C. to 1,500 r.m.s. and 4,000 peak to peak. Resistance measurements from 0.1 ohm to 1,000 megohms with internal battery. D.C. input resistance is 11 megohms and dB measurement has a centre-zero scale. Complete with test prod, leads and standardising battery. Power requirements. 200-250 v. 40-60 c/s. A.C., 10 watts.



Kit £13.18.6 Assembled £19.18.6

### HIGH VOLTAGE PROBE KIT Model HV-336

Extends measurement up to 30,000 v. D.C. with negligible circuit loading. A special High Stability 1,090 megohm resistor gives a multiplication factor of 100X when used with a valve voltmeter of 11 megohms input resistance such as the V-7A.

Kit £2.19.6

### R.F. PROBE KIT Model 309-CU

This complete probe kit will extend the frequency range of the V-7A Valve Voltmeter to 100 Mc/s. and will enable useful voltage indication to be obtained up to 300 Mc/s.

Kit £1.13.6 Assembled £2.2.0

### POWER SUPPLY UNIT KIT Model MGP-1

Compact, general purpose unit suitable for F.M. Tuners, Tape Recording Amplifiers and general laboratory use. Input 100/120 v., 200/250 v., 40-60 c/s. Output 6.3 v., 2.5 A. A.C.; 200, 250, 270 v., 120 mA. max. D.C.



Kit £5.2.6 Assembled £6.12.6

### DECADE CAPACITOR KIT Model DC-1

Capacity values 100μF to 0.111μF. in 100μμF. steps. Precision silver-mica capacitors and minimum loss ceramic wafer switches ensure high accuracy.

Kit £7.5.0 Assembled £10.8.0

### 2½ in. SERVICE OSCILLOSCOPE KIT Model OS-1

Light, compact, portable for service engineers. Printed circuit board for easy construction. Time base 15 c/s. to 150 kc/s. in four ranges and 50 c/s. sine wave sweep. Flyback suppression on all ranges. Internal, external and 50 c/s sync. Size 5 x 8 x 14½ in. long. Weight 10½ lb.



Kit £22.18.0 Assembled £30.8.0

### CAPACITANCE METER KIT Model CM-1U

This Direct-Reading Capacitance Meter is a very low priced, time-saving instrument which is so useful that it should be part of the general equipment of every electronic laboratory and production line. Easily built in a few hours. 0-100μμF., 0-1,000μμF., 0-0.01μF., 0-0.1μF. The meter has 4½ in. scale and can be used by an unskilled operator after a few minutes' instruction.



Kit £15.15.0 Assembled £21.14.0

**DAYSTROM LTD.**

DEPT. W.W.1, GLOUCESTER, ENGLAND

A SUBSIDIARY OF THE WESTON INSTRUMENTS GROUP, MANUFACTURERS OF

thoroughly



dependable

**AMATEUR TRANSMITTER KIT**

**Model DX-40U**



Covers all amateur bands from 80 to 10 metres, crystal controlled. Power input 75 watts C.W. 60 watts peak controlled carrier phone. Output 40 watts to aerial. Provision for VFO. Filters minimise T.V. interference. Modulator and power supplies are built-in. Single knob band switching is combined with a pi-network output circuit for complete operating convenience. A high-grade moving-coil meter indicates the final grid or anode current. Provision is made for the use of 3 crystals with access through a trap-door in the back of the cabinet. A 4-position switch selects the appropriate crystal or a jack for external VFO which can be used instead of the crystal(s).

Kit ... £33.19.0 Assembled ... £45.8.0

**"MOHICAN" GENERAL COVERAGE RECEIVER KIT Model GC-IU**



This fully transistorised receiver which includes 4 piezo-electric transistors, is in the forefront of receiver design. It is an excellent portable or fixed station receiver. The R.F. "front-end" is supplied as a pre-assembled and pre-aligned unit. Its many features include a 10-transistor circuit, printed circuit board, telescopic whip antenna, tuning meter, and a large slide-rule dial giving a total length of approximately 70 inches. Housed in a steel cabinet and powered by two 6 volt dry batteries (not supplied), mounted internally, it gives frequency coverage from 580 kc/s. to 30 Mc/s. in five bands; thus enabling world-wide reception. Electrical bandwidth covers the amateur bands from 80 to 10 metres—each band having a scale length of approximately 8 inches. BFO tuning and Zener diode stabiliser. Size 6½ x 12in. x 10in. Please write for specification leaflet.

Kit ... £37.17.6 Asmbld. ... £45.17.6

**AMATEUR TRANSMITTER KIT**

**Model DX-100U**



The World's most popular Amateur TX Kit

- Completely self-contained compact Amateur Transmitter, 150 w. D.C. input.
- Built-in highly stable VFO and all Power Supplies.
- TVI: Careful design has reduced TVI to a minimum by use of effectively screened frequency generating stages and pi-tuned circuits at the input and output of the PA stage and by 11 chokes and pi-network filters to all outlets from the cabinet. No fewer than 35 disc-ceramic by-pass capacitors help to achieve the exceptional stability and high-performance for which this Transmitter is noted.
- The KT88 high-level anode and screen modulator stage gives over 100 watts of audio from less than 1.5 mV. input.
- Adjustable drive and clamp control ensures that valves are only driven sufficiently to maintain the required output.
- Keying on CW is via the VFO and buffer amplifier cathodes; the other RF valves are biased beyond cut-off. When zero-beating the TX with incoming signals, the exciter stages only may be run without the final amplifier being switched on.
- Provision has been made for remote control operation.
- VFO slow-motion drive is very smooth and backlash free.
- VFO or Crystal control.
- Covers all Amateur bands up to 30 Mc/s. 'phone or CW.

Kit ... £79.10.0 Assembled...£104.15.0

**SINGLE SIDEBAND ADAPTER KIT**

**Model SB-I0U**



May be used with most A.M. transmitters with certain provisions. Allows full use of existing equipment for SSB facilities. Band coverage: 80, 40, 20, 15, 10 m. Unwanted sideband suppression; better than 30 dB. Carrier suppression; better than 40 dB. Power requirements: 300 v. D.C. 85 mA. (average) 30 mA. (standby), 140 mA (transmit). 6.3 v. A.C., 3.5 A. Meter: 2½in. Scale edge reading, 200µA movement, indicates carrier null and relative power output. Cabinet 11in. high x 8in. wide x 14½in. deep.

Kit ... £39.5.0 Assembled ... £54.18.0

**AUDIO SINE-SQUARE WAVE GENERATOR KIT. Model AO-IU**

Covers 20 c/s. to 150 kc/s. in four ranges with choice of sine or square waves. The latter up to 10 kc/s. Output 10 v. max. and distortion less than 1%. Ideal for audio testing. Size 9½ x 6½ x 5in.

Kit ... £14.15.0 Assembled ... £21.5.0

**GRID-DIP METER KIT Model GD-IU**



Functions as oscillator or absorption wavemeter. With plug-in coils for continuous frequency coverage from 1.8Mc/s. to 230 Mc/s.

Kit ... £10.19.6 Assembled ... £13.19.6

**Additional Plug-in Coils Model 341-U** extend coverage down to 350 kc/s. With dial correlation curves, 17/6.

**TRANSISTOR INTERCOM KITS Models XI-IU and XIR-IU**

Ideal for home or business use. Up to five remote stations can be operated with each Master. The Master unit can call any one, any combination, or all five Remote stations and any Remote station can call the Master. A private call to any Remote station cannot be interrupted or overheard by any other while a conversation is in progress. Any Remote station can talk to any one or all others provided the Master is manned. These kits have been designed for easy construction and high performance. The mahogany veneered wooden cabinets are supplied completely assembled and finished. The Master unit has a 4-transistor amplifier and is operated by an internal 9 v. battery as are the Remote units. Batteries are not included with the Kits.

**Model XI-IU (Master)**

Kit ... £10.19.6 Assembled ... £16.19.6

**Model XIR-IU (Remote)**

Kit ... £4.7.6 Assembled ... £5.16.0

**STABILISED POWER PACK Models MSP-IM and MSP-IW**



Specially recommended for industrial and laboratory use, meeting the need for a reliable and versatile stabilised power pack capable of a very high performance. Input 200-250 v. 40-60 c/s., A.C., fully fused. Outputs: H.T. 200-410 v. D.C. at 20-225 mA. in 3 switched ranges. Unstabilised A.C., 6.3 v. at 4.5 A. centre-tapped. Two 3in. "easy-to-read" meters for reading voltage and current simultaneously. Separate L.T. and H.T. supply transformers. All output circuits are isolated. Size 13in. x 8½in. x 9½in.

MSP-IM (with meters) Kit ... £36.12.6 Asmbld. ... £43.12.6

MSP-IW (less meter) Kit ... £29.17.6 Asmbld. ... £36.17.6

**BALUN COIL UNIT KIT**

**Model B-IU.** Will match unbalanced co-axial lines to balanced lines of either 75 or 300Ω impedance. Frequency range 10-80 m., input up to 200 watts.

Kit ... £4.15.6 Asmbld. ... £5.8.6

**TAPE AMPLIFIER KITS Models TA-IM and TA-IS**

This Combined Tape-Record Replay Amplifier is available in both monophonic and stereophonic models. Model TA-IM can be modified to the stereo version with modification kit TA-IC.

TA-IM Kit £19.8.0. Asmbld. £28.18.0

TA-IS Kit £25.10.0 Asmbld. £35.18.0

TA-IC Kit ... £6.15.0

All prices include free delivery in the U.K.

**Deferred Terms**  
are available on all orders above £10

**VARIABLE FREQUENCY OSCILLATOR KIT. Model VF-IU**



Specially designed to meet the demand for the maximum possible flexibility from an amateur Transmitter which would otherwise be subject to certain limitations imposed by crystal control. Calibrated for all Amateur bands 160-10 metres, fundamentals on 160 and 40 m. Ideal for Heathkit DX-40U and similar transmitters.

Kit ... £10.17.6 Assembled ... £15.19.6

**Q MULTIPLIER KIT. Model QPM-I**



A reasonably priced Q Amplifier for the amateur and short-wave enthusiast. This self-powered unit (200-250 v. 50/60 c/s.) may be used with communications receivers to provide both additional selectivity and signal rejection.

Model QPM-I for 470 kc/s. IF.  
Model QPM-16 for 1.6 Mc/s. IF.

Kit, either model ..... £8.10.0  
Assembled ..... £12.14.0

**A WIDE RANGE OF BOOKS ON ELECTRONICS AND RADIO AVAILABLE.**  
Send for Lists and Prices.

By arrangement with **RECORD HOUSING** we can now supply you with any one of their large range of fully finished Equipment Cabinets.  
*May we send you details?*

Please send me FREE CATALOGUE (Yes/No).....

Full details of Model(s) .....

NAME.....  
(Block Capitals)  
ADDRESS .....


WWI

**DAYSTROM LTD.**

DEPT. W.W.I, GLOUCESTER, ENGLAND

THE WORLD'S LARGEST-SELLING ELECTRONIC KIT-SETS

1WW-016 FOR FURTHER DETAILS.

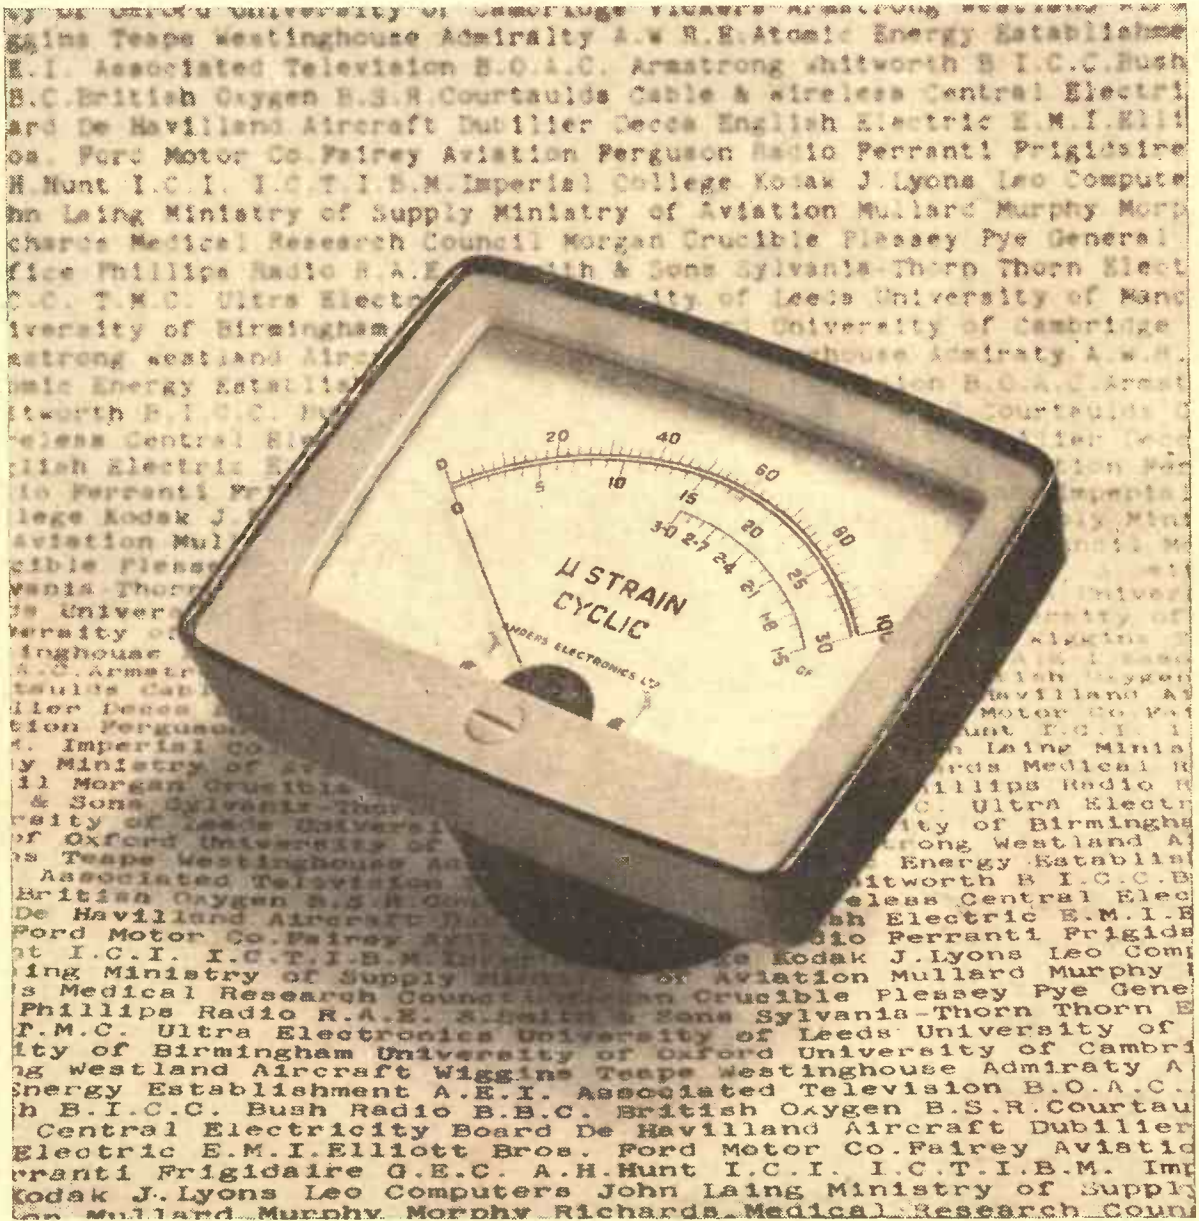

from ANDERS to industry

# meters made to measure

There are many famous users of the Anders service—a service designed to give the speediest possible delivery of even the most unusual meter requirement. The Anders Instrument Centre has unique facilities for supplying non-standard meters of all types, from 1½" miniatures to the largest switchboard meters, specially calibrated and tested. For immediate delivery, Anders carry huge stocks of stan-

dard meters of all well-known makes and types. New ranges are constantly being added—Anders are now sole UK agents for the famous Frahm vibrating reed frequency meters and tachometers. 2½" miniature hermetically-sealed instruments to large panel-mounting meters with accuracies of 0.1%.

For full details of the Anders service, please write or phone

# ANDERS

## ELECTRONICS LIMITED

103 HAMPSTEAD ROAD, LONDON N.W.1. TELEPHONE: EUSTON 1639  
Contractors to GPO and Government Departments. Ministry of Aviation approved.

METERS, ELECTRONIC AND TEST EQUIPMENT TO INDIVIDUAL SPECIFICATIONS  
1W W-017 FOR FURTHER DETAILS.



# in control?

## ... FEEDBACK APPLIED TO MOST SITUATIONS GIVES STABLE SATISFACTION

*Those who know a good thing when they see it choose FEEDBACK systems and components wherever "control" is taught or applied. Up to the minute designs which are versatile, robust and reliable. Please apply for further details.*

### EQUIPMENT FOR TESTING CONTROL SYSTEMS

These instruments provide the essential forcing functions needed for measurements, including transient and frequency response testing on practically all types of automatic control system. Novel facilities reduce the need for external auxiliary equipment to a minimum. When used with suitable oscilloscope or recorder display, accurate gain, phase and transient measurements provide probably the easiest, quickest and cheapest system analysis on the market.

Frequency range—1 cycle in 20 minutes to 1200 c.p.s.

Functions include—Square, ramp, triangle, sine (single, variable and multi-phase).

Ancillary equipment includes—Modulator/demodulators (50 c.p.s.-3000 c.p.s.) and output amplifiers.

### INDUSTRIAL SERVO SYSTEMS AND COMPONENTS

These electronic units and mechanical components are the essential parts of precise low-power position and speed control systems. The mechanical components include 64 D.P. gears and mounts for synchros sizes 11 to 23. A.C. servo amplifiers are suitable for 50-3000 c.p.s. and can deliver up to 25 watts for motor drive. Transistorised 400 c.p.s. power units. D.C. servo drive package includes all supplies and an operational amplifier. Complete motor speed control systems.

### ANALOGUE COMPUTERS AND SIMULATORS

Range of building blocks for teaching computer techniques. Also available as complete instruments for teaching process control and system analysis.

### LOGIC TEACHING AND EXPERIMENTAL SYSTEMS


Novel approach to logic teaching and circuit evaluation. Multi-purpose logic elements plug into board—layout conforming to the theoretical diagram. Rapid interconnection without soldering and easy checking of binary states with buffered indicator lamps. Complete with theoretical and practical coursework.

### INSTRUCTIONAL SERVO SYSTEMS

Suitable for demonstration and analysis of both a.c. and d.c. systems. Coursework ranges from investigations on simple closed loop position control to higher order systems operating under non-linear conditions. They are already in use throughout the world.

Our continually expanding activities include—multi-phase generators operating at up to 100 Kc/s and a range of dual voltage stabilised d.c. power supplies.

APPLY FOR SHORT FORM CATALOGUE AND PRICE LIST

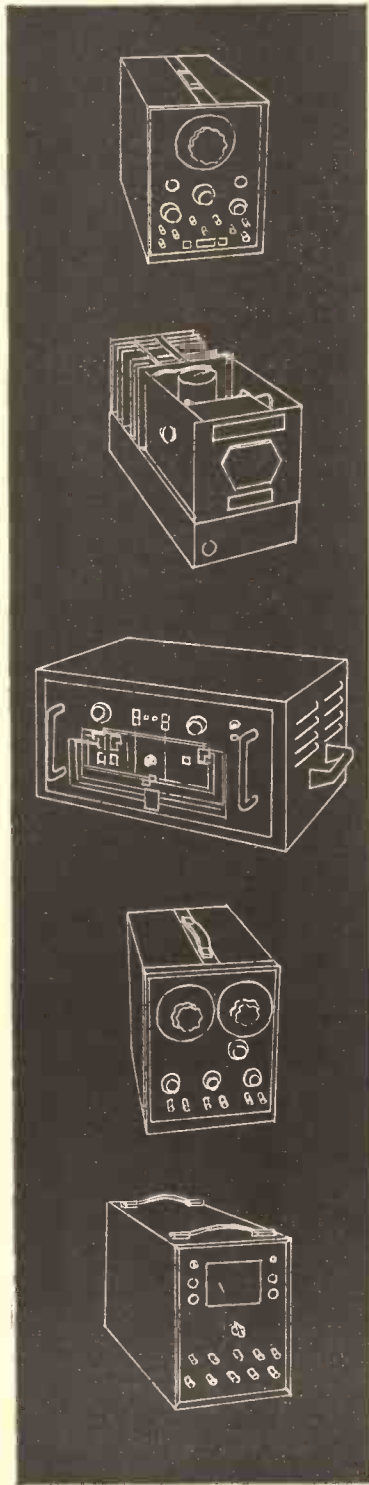



## FEEDBACK LTD.


---

**CROWBOROUGH SUSSEX**  
**CROWBOROUGH 3566**

1WW-018 FOR FURTHER DETAILS.

# GAS TYPE 601 LASER

Continuous Monochromatic  
Light Source

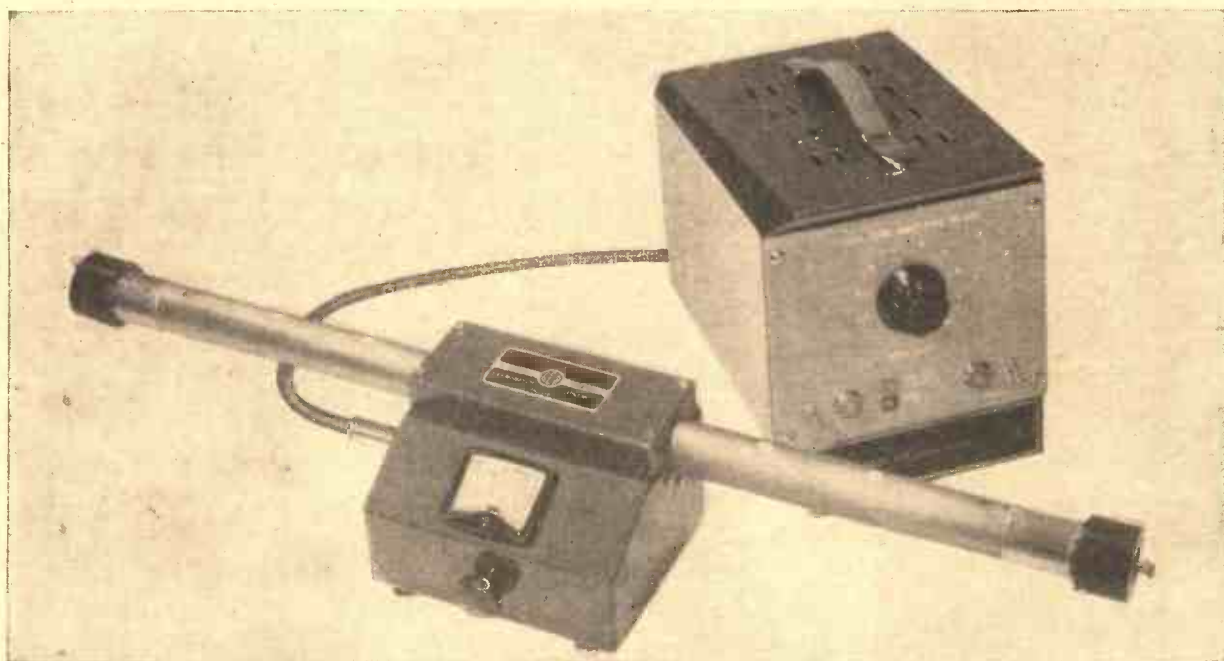

Bradley helium-neon Gas LASERS have a continuous high flux output of extreme spectral purity, readily appreciated by research groups, for applications such as Interferometry (Metrology and fine Measurement). Gas LASERS are rapidly replacing conventional light sources in schools and technical colleges, where their spectral purity and high flux greatly simplify the demonstration and explanation of optical principles and phenomena.

Write or 'phone for demonstration and data sheet.

Electral House, Neasden Lane, London, N.W.10 Telephone: Dollis Hill 7811. Telegrams: Bradelec London N.W.10 Telex: 25583  
1WW-019 FOR FURTHER DETAILS.

**£350** complete with  
drive unit




**G & E BRADLEY LIMITED**

AVAILABLE  
FROM

# Pinnacle

A COMPREHENSIVE RANGE OF  
**PHOTOCELLS**

manufactured by

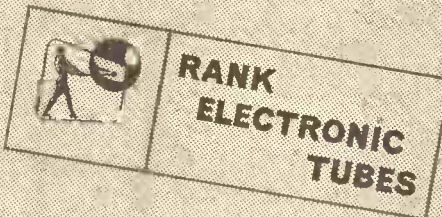

Distributed by the **Pinnacle** Organisation

Special arrangements with Rank Electronic Tubes make it possible for us to give a rapid delivery from stock. This service is backed by the technical resources of a company with over thirty years' experience in the manufacture of standard and special photosensitive devices.

OUR LIST CONTAINS EQUIVALENTS TO OVER 150  
SPECIFIC TYPES COMMONLY USED IN INDUSTRY

**PINNACLE ELECTRONICS LIMITED**  
ACHILLES STREET, NEW CROSS, LONDON, S.E.14. Tel: TIDeway 7285

**ADCOLA**  
 PRODUCTS LIMITED  
 (Regd Trade Mark)

**SOLDERING  
 EQUIPMENT**

INDIVIDUALLY  
 PRODUCED



FOR FULL INFORMATION  
 Apply Direct to:

**ADCOLA PRODUCTS LTD.**  
**ADCOLA HOUSE**  
**GAUDEN ROAD**  
**LONDON S.W.4**

Telephones  
 MACaulay 4272 & 3101  
 Telegrams  
 SOLJOINT LONDON S.W.4

# CLARK

**AIR OPERATED TELESCOPIC MASTS**

#### SOME APPLICATIONS

Radio Aerials  
 Meteorological Instruments  
 Microphones  
 T.V. Cameras  
 Floodlighting  
 Aircraft Landing Beam checks and calibration

#### BRIEF INFORMATION

Extended heights: 16-100 feet  
 Lifting Capacity: 1-200 lb.  
 Material: High Tensile Light Alloy

Full range of attachments for mounting masts on vehicles or in open country

Air supply taken from hand-pump, air compressor or air bottle through special control valves

**EACH MAST BACKED BY  
 THE EXPERIENCE WHICH  
 HAS MADE CLARK THE FIRST  
 CHOICE**

*Write for Pocket Catalogue today.*



#### **A. N. CLARK (ENGINEERS) LIMITED**

Binstead, Ryde, Isle of Wight  
 (Formerly of Merton, London, S.W.19)

Telephone: RYDE 3691

Telegrams: TELEMST RYDE

1W-021 FOR FURTHER DETAILS.

# Wireless World

## INFORMATION SERVICE FOR PROFESSIONAL READERS

To obtain further details of any of the coded items mentioned in the Editorial or Advertisement pages of this issue, please complete one or more of the attached cards entering the reference number(s). Your enquiries will be passed on to the manufacturers concerned and you can expect to hear from them direct in due course. Cards posted from abroad require a stamp.

PLEASE USE CAPITAL LETTERS

Pour obtenir tout autre renseignement sur tout article mentionné dans l'Editorial ou dans les pages publicitaires de ce numéro nous vous prions de remplir une ou plusieurs des cartes ci-jointes en inscrivant le numéro ou les numéros de référence. Vos demandes de renseignement seront transmises aux fabricants intéressés qui, entemps voulu, vous feront parvenir une réponse. Il est nécessaire d'affranchir les cartes postées de l'étranger.

PRIÈRE D'UTILISER DES CARACTÈRES D'IMPRIMERIE

Weitere Einzelheiten über irgendwelche Artikel, die auf redaktionellen oder Anzeigenseiten erscheinen erhalten Sie, indem Sie eine oder mehrere der beigefügten Karten ausfüllen und die Kennnummer(n) angeben. Ihre Anfrage wird an den Hersteller weiter geleitet, und Sie werden dann direkt von ihm hören. Karten, die im Ausland aufgegeben werden, müssen frankiert werden.

BITTE IN BLOCKSCHRIFT AUSFÜLLEN

Per ulteriori particolari in merito agli articoli menzionati nel testo o nelle pagine pubblicitarie di questo numero, Vi preghiamo di completare una o più delle schede allegate citando il numero o i numeri di riferimento. La Vostra richiesta sarà inoltrata ai fabbricanti interessati che Vi risponderanno direttamente. Le schede dall'estero devono essere regolarmente affrancate.

SI PREGA DI COMPILARE LE SCHEDE A STAMPATELLO

Con objeto de obtener mas detalles de cualquier de los articulos mencionados en las paginas editoriales o de anuncios de este numero sirvase rellenar una o mas de las unidas tarjetas citando el numero o numeros de referencia. Sus consultas seran transmitidas a los fabricantes interesados de quienes stendran noticias directamente a su debido tiempo. Las tarjetas enviadas desde el extranjero requieren franqueo.

SIRVASE ESCRIBIR CON LETRAS MAYUSCULAS

10-12 Watts - 5 kVA

# DRAKE TRANSFORMERS

Mains Transformers

Chokes

Audio Output Transformers

Audio Input Transformers

Saturable Reactors

Coils

Current Transformers

Transistor Transformers

Inverter Transformers

Screened Microphone

Transformers

Wide Band R.F. Transformers



**DRAKE TRANSFORMERS LTD., BILLERICAY, ESSEX**

Billericay 1155

# MAJOR TECHNICAL BREAKTHROUGH BY 'ENGLISH ELECTRIC' NEW TARGET MATERIAL EXTENDS TUBE LIFE



Resulting from a programme of intensive research and development *English Electric Valve Company* announce a *Major Breakthrough* with an entirely new target material for its *Image Orthicons* giving an operational life expectancy of at least 3 *TIMES* that experienced with normal tubes.

**THE ELCON\* TARGET ACHIEVES:**

■ Guaranteed life of 750 hours ■ Complete lack of image retention—no sticking pictures ■ Stability of contrast reproduction—no matching problems ■ Sensitivity fall-off greatly reduced—sensitivity remains constant for life ■ Immediate switch-on—no warm-up delay.

Reports on pre-production samples of the new ELCON\* Image Orthicons, from North America, show consist

Write or telephone immediately for full information

**ENGLISH ELECTRIC VALVE COMPANY LTD Chelmsford, England AGENTS THROUGHOUT THE WORLD**

TELEPHONE: CHELMSFORD 3491 EXTENSION 262 TELEX 1913

ently that operational lives of between 3,000 and 5,000 hours are possible.

Another important EEV development incorporated in the ELCON\* tube is that of complete absence of image induced microphony. This together with the Major Breakthrough development makes *News*.


The complete EEV range of 3" Image Orthicons features the ELCON\* target and these are now in current production.

Sample quantities of EEV 4½" tubes, incorporating this outstanding development, will be available shortly and full-scale production will commence early in 1965.

\*ELCON is derived from the properties of the new EEV target—namely *ELECTronic CONducting* as opposed to the familiar ionic conductors normally used.

# PAINTON RELIABILITY

at the right price for these  
**FIVE NEW CONNECTORS**

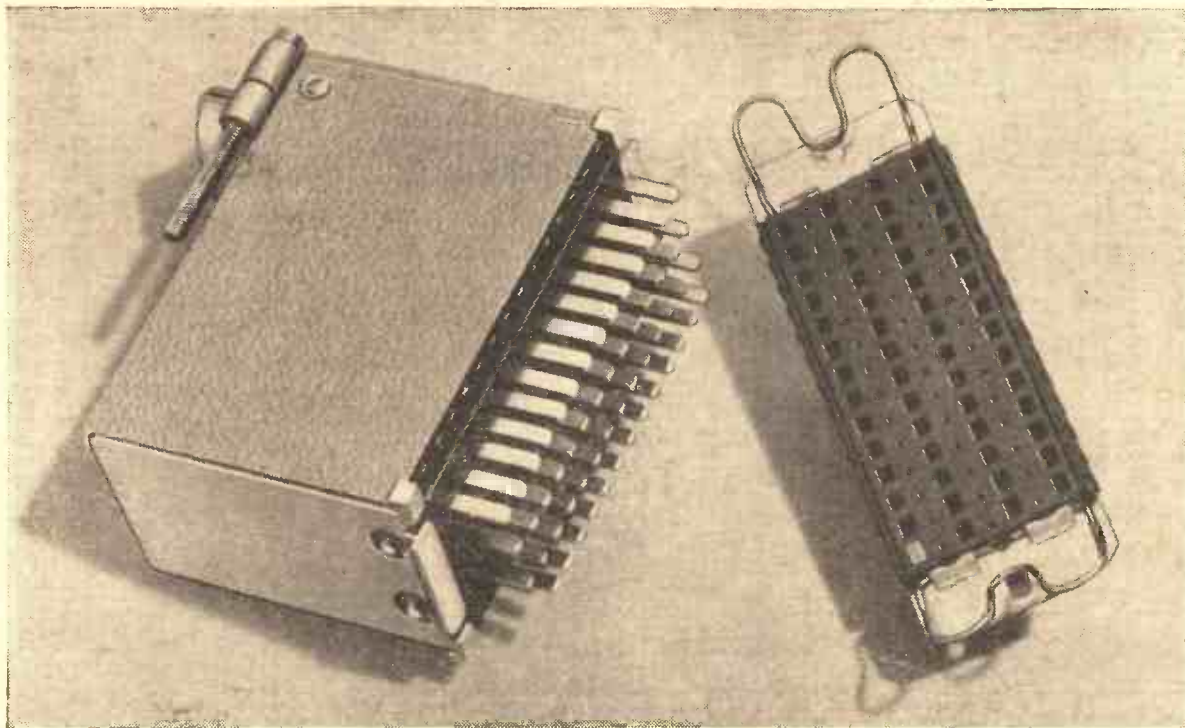

**35** WAY

**47** WAY

**\*55** WAY

**59** WAY

**71** WAY

These new additions to the Painton **159 Series** Connectors embody the space-saving configuration and high standards of reliability already well established for this range of components, and are offered at sensible prices. Send for leaflet P.S.12

\* This type specially developed for the G.P.O. & approved by them as PO203.

**Painton**  
& CO LIMITED

KINGSTHORPE · NORTHAMPTON


Tel: 34251 (10 lines) · Grams: 'Ceil' Northampton · Telex 31576

Overseas Associated Companies **Australia** Painton Australia Pty. Ltd. · **Benelux** Painton S.A. · **Germany** Painton G.m.b.H.  
**Italy** Painton Italiana · **Sweden** Svenska Painton A.B. · **U.S.A.** Painton Inc.

# STOP

# HEAR

HEAR AMPLIFIER WITH GOOD CERAMIC PICK-UP STOP  
 TUNERS TWO WILL DELIGHT YOU STOP  
 PERFORMANCE AT PRICE UNBEATABLE STOP  
 FURTHER DETAILS IMPOSSIBLE HERE STOP  
 COUPON BELOW FOR CATALOGUE AND  
 OVER 300 STOCKISTS WILL ASSIST STOP  
 START NOW

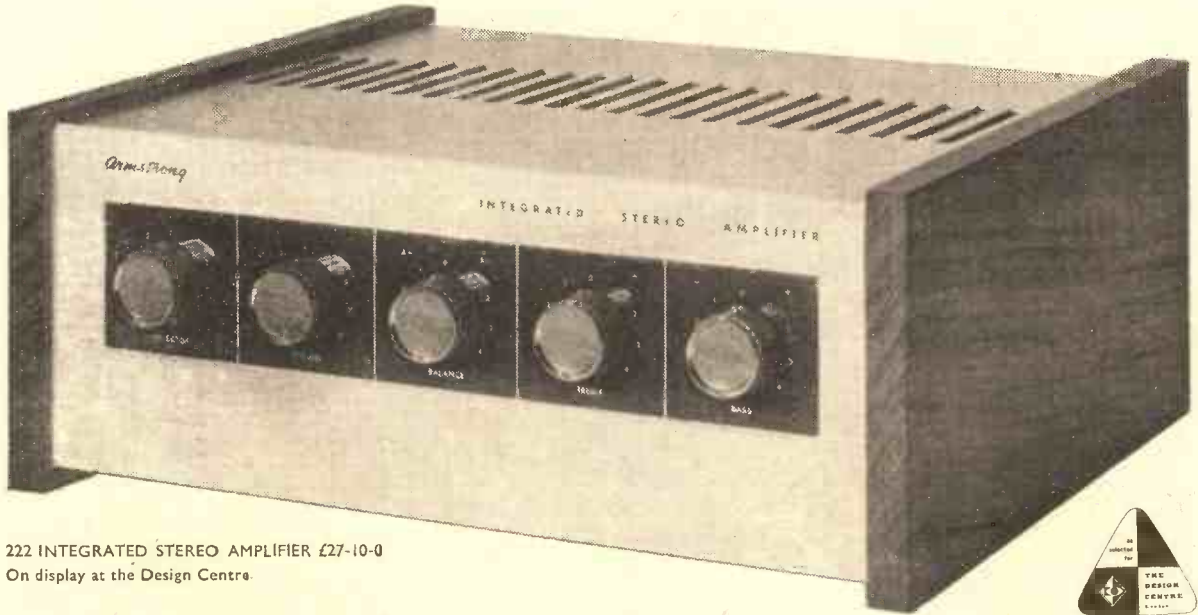

222 INTEGRATED STEREO AMPLIFIER £27-10-0  
 On display at the Design Centre



223 AM-FM TUNER (illustrated) £28-15-0  
 224 FM TUNER £22-10-0  
 ALL MODELS optional case as shown £3-10-0 extra

Wright + Connor



name .....

address .....


.....

WW·1·65

ARMSTRONG AUDIO LTD · WARLTERS ROAD · HOLLOWAY · LONDON · N7  
 1WW-023 FOR FURTHER DETAILS.

telephone: NORTH 3213



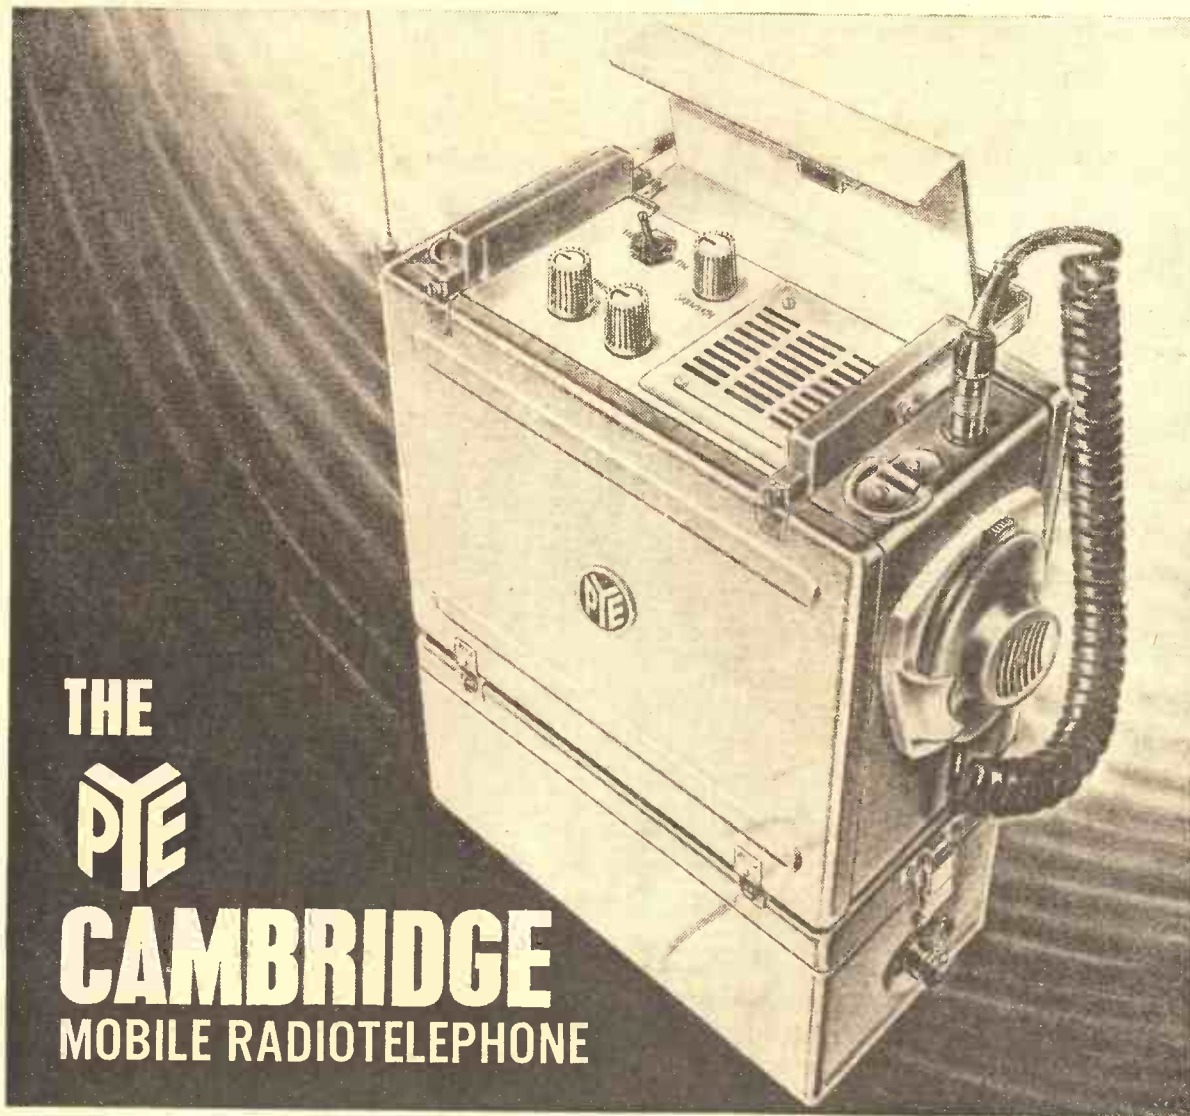

THE



## CAMBRIDGE MOBILE RADIOTELEPHONE

# NOW—A high powered Portable!

At last—a compact, transistorised V.H.F. radiotelephone with all the power and performance of vehicle mobiles. The rechargeable battery gives up to 60 hours duration on receive and about 36 hours with 1:50 ratio of transmitter to receive time. The whole unit is completely weatherproofed, and is available for A.M. or F.M. systems. There is also a marine version. The answers to your questions are waiting at the address below.

- Frequency range 25 to 174 Mc/s.
- Fully transistorised receiver.
- Standby battery drain—200mA.
- Sealed I.F. block filters.
- Electronic Squelch.
- 25 or 50 Kc/s channelling by change of filter.
- 1 to 6 channels as required.
- Designed to meet British, American and European specifications.
- A.M./F.M. versions available.

**PYE TELECOMMUNICATIONS LTD.**  
CAMBRIDGE · ENGLAND · TELEPHONE: TEVERSHAM (CAMBRIDGE) 3131 · TELEX 81166.



NEW!

# CADRE

## 2-WAY CB RADIOS

**SOLID-STATE TRANSCEIVERS  
& ACCESSORIES FOR RELIABLE,  
LOW COST COMMUNICATIONS**



### CADRE 5-Watt CB Radios

5 Watt, 5 Crystal-Controlled Channel  
All Transistorized Transceiver

Model 510-A — 23 channel crystal-correlated tuner—  
12 VDC/110-220 VAC

Model 515-A — For AC/DC operation (same as Model  
510-A less 23 channel manual tuner)

Model 520-A — DC operation mobile or field

Model 525-A — The 520-A in special portable pack

### CADRE Hand Held CB Radios

2 Crystal-Controlled Channels  
Rechargeable battery or penlite cell power  
supply

All Transistor—Built-in telescoping antenna

Model C-75 — 1.5 Watt

Model C-60 — 100 Milliwatts



### CADRE Consort FM Wireless Microphone

A complete, portable wireless PA system  
when used with any FM radio. A wireless  
short range FM transmitter effective  
up to 200 feet from FM radio. Infinite uses.



### CADRE 524 Selective Call

Solid-State Encoder-Decoder  
Three tones with switching provide 24 tone combinations.  
Designed to work with Cadre transceivers and other  
12 VDC transceivers on the market.

Write for complete Catalog Specifications and Prices.

**MORHAN**  
EXPORTING CORPORATION

458 Broadway, New York 13, U.S.A. Cable Address: Morhanex

1W W-025 FOR FURTHER DETAILS.

# FANE TRIMLINE SPEAKER KIT

Comprising:

	Price if purchased separately.
1 Special low resonance 12in. Bass speaker type 122/10L.....	£5 10 0
1 Fane Mid-range 8in. x 5in. speaker type 151.....	£3 0 0
Purchase Tax.....	9 10
1 Fane H.F. Unit type 301.....	£3 15 0
1 Complete set of cross-over components .....	15 0
1 Circuit wiring diagram.....	2 6
1 Suggested Cabinet drawing..	2 6

PRICE OF  
COMPLETE KIT  
AS ABOVE

# 12 GUINEAS

*This loud speaker assembly of specially  
matched units is suitable for building into  
any good high fidelity enclosure but with an  
overall depth of only 4½in. is very suitable  
for slim line cabinets.*

*It is suitable for working with Amplifiers  
of up to 20 watts output and is particularly  
good for stereo working.*

*The normal input impedance of the  
assembly is 15 ohms although kits for  
3 to 5 ohms can be supplied to order at the  
same price.*

Manufactured by

**FANE** acoustics  
LIMITED



HICK  
LANE,  
BATLEY,  
YORK-  
SHIRE

Sole distributors to the wholesale and retail trade:—

**LINEAR PRODUCTS LIMITED,  
ELECTRON WORKS, ARMLEY, LEEDS 12.**

1W W-026 FOR FURTHER DETAILS.

# FOR RAPID PRECISION SOLDERING...



Photograph by courtesy of ELLIOTT AUTOMATION LIMITED.

**CHOOSE ANTEX** \* PRECISION SOLDERING IRONS

**... used by experts everywhere !**

**ANTEX IS PURPOSE-DESIGNED**

for speed and efficiency in soldering Printed Circuits, Transistors, Micro-Miniature Assemblies, Deaf-Aid Equipment and similar products.

**ANTEX INCREASES PRODUCTION**

ANTEX Irons weigh only 2-3 ounces. Streamlined to give absolute finger-tip control and ensure increased production of 5% to 10% compared with ordinary soldering irons.

**ANTEX CUTS PRODUCTION COSTS**

So easy to use—ANTEX reduces operational fatigue, with resulting drop in reject output. ANTEX, having the lowest leakage current of any miniature iron, virtually eliminates all risk of damage to transistors.

**ANTEX FOR RELIABILITY**

Guaranteed for 1000 hours' continuous production—on fine work giving a potential of well over a quarter of a million, trouble-free soldering points.

**ANTEX BITS** are really **INTERCHANGEABLE** ANTEX patent design gives instant interchangeability of bits—as often as you like—without damaging the iron!

*\* Latest in the ANTEX Range is Model C240N—a giant in power performance—a midget in compact construction! FITTED WITH LONG-LIFE "FERRACLAD" BITS.*

*For more details fill in and post this coupon TODAY!*

<b>ANTEX</b> <small>LIMITED</small>	<b>SPECIALISTS in</b> Soldering Appliances
<b>GROSVENOR HOUSE, CROYDON, SURREY</b>	
Tel: MUNICIPAL 2774	
<i>Please send details and prices of the ANTEX Range of Precision Soldering Irons.</i>	
NAME .....	.....
ADDRESS .....	.....
.....	.....
.....	.....
STATUS .....	.....
	WW

# Measures From 50 $\mu$ V to 500V on 12 Ranges and can be used as an Amplifier

## TRANSISTOR A.C. VOLTMETER TYPE TM2B

### SPECIFICATION

**VOLTMETER RANGES**

1.5mV, 5mV, 15mV....500V f.s.d.

**ACCURACY**

$\pm 2\%$  of reading  $\pm 1\%$  of f.s.d. at 1 kc/s.

**dB RANGES**

-800B to +56dB relative to 1mW into 600 $\Omega$ .

**FREQUENCY RESPONSE**

$\pm 3$ dB from 6 c/s to 250 kc/s.  
 $\pm 0.7$ dB from 10 c/s to 100 kc/s.  
 $\pm 0.2$ dB from 20 c/s to 50 kc/s.  
 $\pm 0.1$ dB from 30 c/s to 30 kc/s.

**INPUT IMPEDANCE**

1.8M $\Omega$  and 10pF on 1.5V to 500V.  
 $> 0.8$ M $\Omega$  and  $< 60$ pF on 5mV to 500mV.  
 $> 0.5$ M $\Omega$  and  $< 65$ pF on 1.5mV.

**INPUT NOISE LEVEL**

$< 15\mu$ V for zero source resistance.  
 $< 30\mu$ V for 100k $\Omega$  source resistance.

**AMPLIFIER RANGES**

10dB steps up to 60dB with frequency response and input impedance as above; 80dB gain from 10 c/s to 30 kc/s with input impedance  $< 50$ k $\Omega$ .  
 Output 1.5V to 10k $\Omega$ .

**MICROVOLT INDICATOR RANGE**

$< 150\mu$ V f.s.d.  $< 10\mu$ V readable from 30 c/s to 30 kc/s.

**MAXIMUM INPUT VOLTAGES**


75V A.C. and 350VD.C. on "mV".  
 750V A.C. peak plus D.C. on "V".

**SUPPLY**

Self-contained PP9 batteries; typical life 1,000 hours or A.C. Mains when power unit is fitted.

**SIZE AND WEIGHT**

10in. high  $\times$  6in. wide  $\times$  4in. deep; 6 pounds.

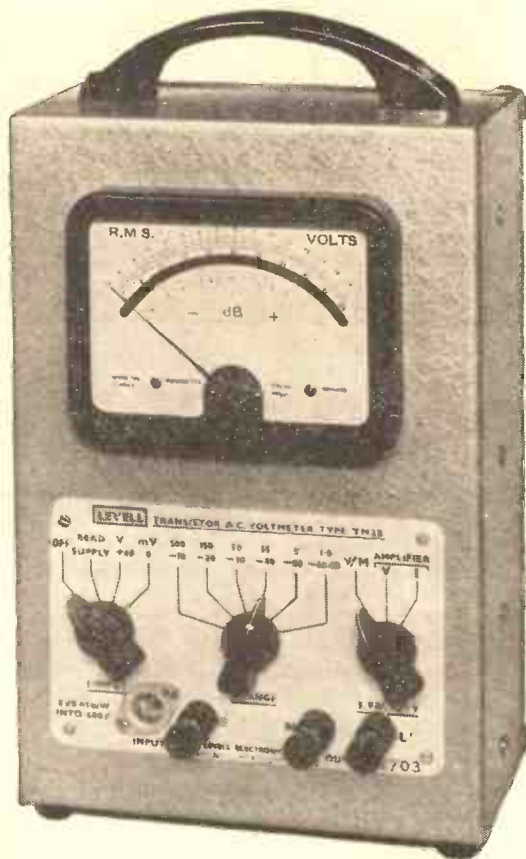

Price complete with batteries and low capacity lead..... **£45**

Mains Power Supply Unit ..... **£9.0.0** extra

Leather Carrying Case ..... **£3.10.0** extra

*Fully detailed leaflets available on our full range of portable instruments.*

**LEVELL ELECTRONICS LTD**  
 PARK ROAD, HIGH BARNET, HERTS

Telephone: **BARnet 5028**  
 1WW-028 FOR FURTHER DETAILS.

# The ***FINEST*** LOUDSPEAKER

## in its class -

the **Celestion** Studio Series

### CX 1512 CO-AXIAL



**Price**  
£11 · 10 · 0d

**READ THIS**




Compare this Celestion loudspeaker with any other 12" unit rated at 15 Watts or less. No better value for money exists. Check the six features shown below, no other loudspeaker gives you these at a similar price.

#### Specification

Overall Frequency Response	30 - 15,000 c/s
Power Handling Capacity	15 Watts
Fundamental Resonance Frequency	35 c/s
Crossover Frequency	4 kc/s
Impedance	15/16 ohms
Ceramic Magnet	
Flux Density	13,000 gauss
Total Flux	88,000 Maxwells

TYPICAL RESPONSE CURVE OF THE CX 1512




#### Enclosures



To obtain the best performance from your CX 1512 it is necessary to use a suitable enclosure. Design Furniture Limited have designed the C15.20 enclosure to the rigid specification laid down by Celestion Ltd.

#### Features

- (1) PLASTAFLEX SURROUND
- (2) COMPRESSION TREBLE UNIT
- (3) TWO VOICE COILS
- (4) HIGH FLUX CERAMIC MAGNETS
- (5) PURE ELECTRICAL CROSSOVER
- (6) RIGID DIE-CAST CHASSIS

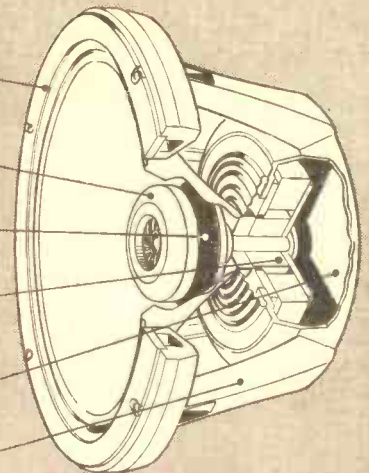

**Celestion** Studio Series

**CELESTION LTD**  
Ferry Works, Thames Ditton, Surrey  
Telephone: EMBerbrook 3402/6

Celestion Ltd., Ferry Works, Thames Ditton, Surrey  
Please send me details of the 'Studio' Series Loudspeakers and suitable enclosures.

Name .....

Address .....

A7 .....

**"You'll never guess  
who has just  
developed the most  
exciting valve tester!"**



**"Of course I can –  
Taylor!"**



No wonder they're talking—Taylor's new Model 45D is the world's most advanced mutual conductance valve tester. Caters for every known type of electronic valve with up to 12 pins at maximum power dissipation of 25w (covering most receiving and medium power transmitting valves). Switches any valve pins to any electrode function independently. T.V. Tube Adaptor also available for testing emission, filament continuity, cathode leakage without removing tube from receiver.

★ Even **SIMPLER** in operation

★ Even **FASTER** in mutual conductance measurement

★ Even **BETTER** to work with

But, really, there are so many improvements that you'd better ask us to send you full details. So why not write or telephone . . . ?

**Taylor**

Taylor Electrical Instruments Limited

Montrose Avenue, Slough,  
England

Phone: Slough 21381


Grams: Taylins, Slough



## TAYLOR 45D



1WW-030 FOR FURTHER DETAILS.

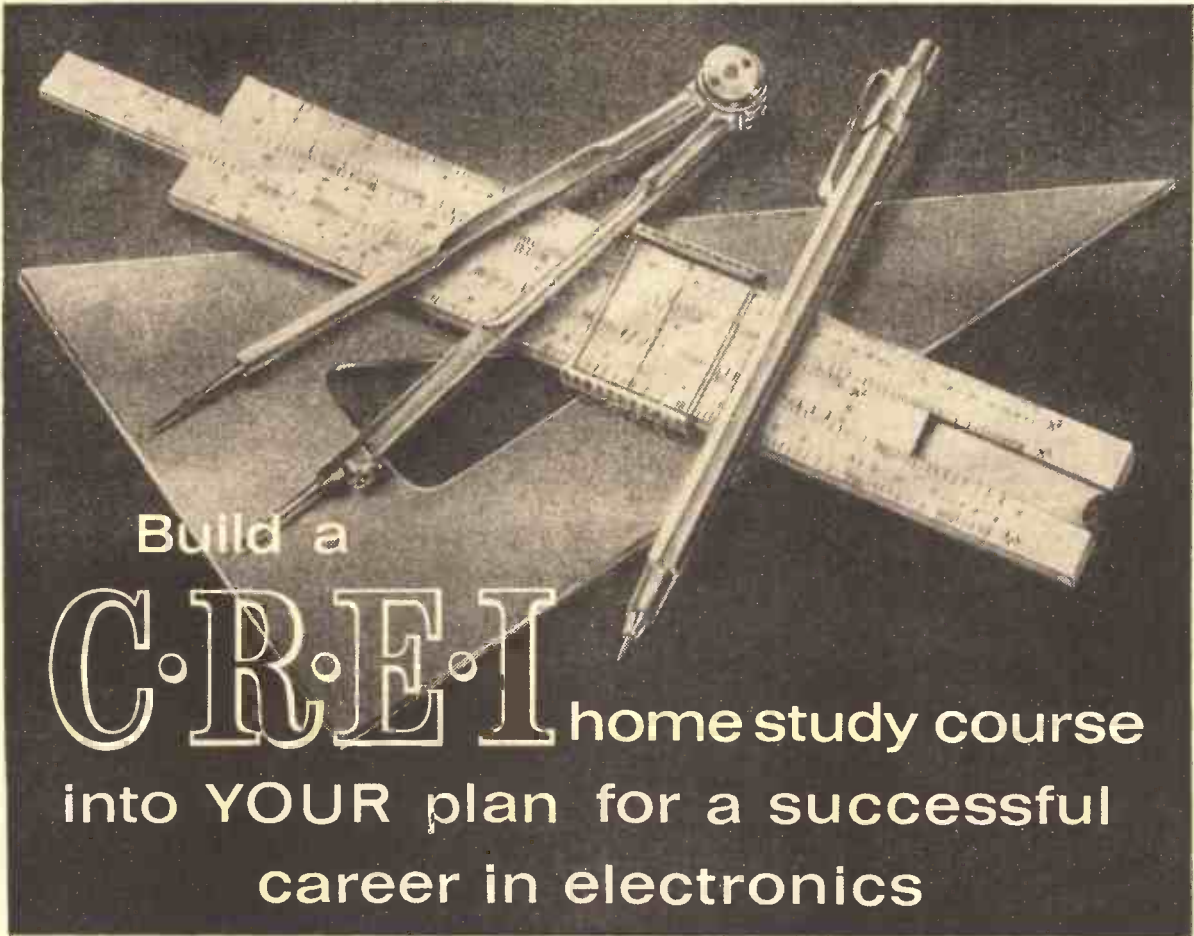

Build a  
**C.R.E.I.** home study course  
 into **YOUR** plan for a successful  
 career in electronics

If you have had two years in practical electronics, or the equivalent in technical education, and are planning to make electronics your career, you cannot do better than take up a selected C.R.E.I. Home Study Course as an important part of your study plan. The courses cover every application of electronic engineering and are arranged so that appropriate studies are available for each grade of student.

On enrolment each C.R.E.I. student is allotted a highly qualified tutor—a selected specialist for each field—who maintains a personal interest in his student throughout the entire course.

In addition special programmes for the City and Guilds of London Institute Telecommunication Technicians' Syllabuses Nos. 49 and 300 have been prepared by C.R.E.I. (LONDON) who are members of the City and Guilds of London Institute.

**C.R.E.I. (London) (Dept. WW50), WALPOLE HOUSE, 173/176 SLOANE STREET, LONDON, S.W.1**

**C.R.E.I. Courses  
 are available in:—**

- Electronic Engineering Technology
- Mathematics for Electronic Engineers
- Telecommunications
- Automation
- Radar
- Servo Systems
- Space Electronics
- Nuclear Engineering Technology
- City and Guilds of London Institute Telecommunication Technicians' Syllabuses

Please send me (for my information and entirely without obligation) full details of the City & Guilds Programme. (C. & G. SUBJECT 49)

1st yr.     2nd yr.     3rd yr.     4th yr.

Supplementary Studies (Subject 300).

NAME .....

ADDRESS .....

Educational and Technical Background .....

C.R.E.I. (London) (Dept. WW50)  
 Walpole House, 173/176 Sloane Street, S.W.1.

Please send me (for my information and entirely without obligation) full details of the Educational Programmes offered by your Institute.

NAME .....

ADDRESS .....

ELECTRONICS EXPERIENCE .....

C.R.E.I. (London) (Dept. WW50)  
 Walpole House, 173/176 Sloane Street, S.W.1.

1WW-031 FOR FURTHER DETAILS.



# 22 new DESIGNS IN

Marconi Instruments Limited announced the first models in the new '2000 Series' in December 1962. In two years, twenty-two new instruments have been introduced—a compatible range of *high quality* electronic measuring equipment which will set the standards in the industry for years ahead.

... AND  
THERE ARE  
MORE  
TO COME



\*\*\* PLEASE  
READ  
THIS LIST  
CAREFULLY

If you have not received full particulars of these new instruments, please mark those in which you are interested and return the list to Marconi Instruments Limited.

**OSCILLATORS**

- A.F. Oscillator Type TF 2100
- M.F. Oscillator Type TF 2101

**ATTENUATORS**

- A.F. Monitored Attenuator Type TF 2160
- M.F. Monitored Attenuator Type TF 2161
- M.F. Attenuator Type TF 2162

**SIGNAL SOURCES**

- A.F. Signal Source Type TF 2000
- M.F. Signal Source Type TF 2001
- M.F./H.F. A.M. Signal Generator Type TF 2002

**VOLTMETERS**

- Sensitive Valve Voltmeter Type TF 2600

**OSCILLOSCOPES**

- Laboratory Measuring Oscilloscope Type TF 2200
- Single Trace Plug-in Unit
- Dual Trace Plug-in Unit
- TV-Differential Plug-in Unit
- Double Beam Oscilloscope Type TF 2202

**RESPONSE ANALYSERS**


- Wave Analyser Type TF 2330
- Tunable Rejection Filter Type TF 2334
- Distortion Factor Meter Type TF 2331
- A.F. Transmission Measuring Set Type TF 2332
- M.F. Transmission Measuring Set Type TF 2333
- TV Transmitter Sideband Analyser Type TF 2360
- White Noise Test Set Type OA 2090

**COUNTERS & FREQUENCY METERS**

- Counter Type TF 2401
- Counter/Timer Plug-in Unit
- Integrating Digital Voltmeter Plug-in Unit
- Phase Angle Meter Plug-in Unit
- 600 Mc/s Converter Plug-in Unit
- Counter/Frequency Meter Type TF 1417/2
- 10—510 Mc/s Converter Type TF 2400/1

**IMPEDANCE BRIDGES**

- Universal Bridge Type TF 2700
- In Situ Universal Bridge Type TF 2701

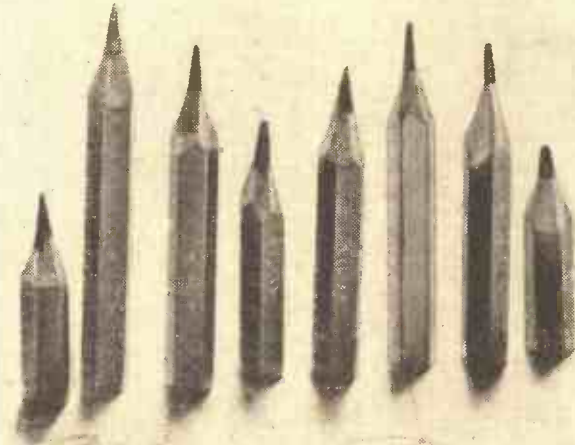

**TWO YEARS**

*A GOOD NAME FOR GOOD MEASURE*

**MARCONI  
INSTRUMENTS**

MARCONI INSTRUMENTS LIMITED,  
ST. ALBANS, HERTFORDSHIRE, ENGLAND. TEL: ST. ALBANS 59292

To: Marconi Instruments Limited, St. Albans, Hertfordshire, England.  
Please send full particulars of the instruments I have indicated to:

Name .....

Position, Department or Section .....

Company .....

Address .....

W.W.

So what's  
so new about  
**TALK-BACK**



"Talk-Back", the smallest, lightest V.H.P. Pocket Radio Transmitter, weighs only 2½ ounces and is entirely self-contained. It enables Keymen to speak to base from wherever they happen to be. The Multitone "Talk-Back" system operates effectively both inside and outside buildings. It can be integrated with any Paging System. Type approved by the British General Post Office.

Two-way speech communication and acknowledging calls is now possible, when used with Multitone Pocket Paging or any other speech system including loudspeakers.

No establishment is too large or too small for this system and it has been specially designed for use where intrinsic safety regulations apply.

If you would like further particulars and details of Multitone's "Talk-Back" fill in the coupon for your free "Instant Communication" brochure.

**INSTANT COMMUNICATION BY**  
**Multitone**


Please send me the brochure "Instant Communication" together with other details of Multitone's "Talk-Back" system.

NAME .....

ADDRESS .....

W.W.

**MULTITONE ELECTRIC COMPANY LTD.,**  
**12 UNDERWOOD STREET, LONDON, N.1.**

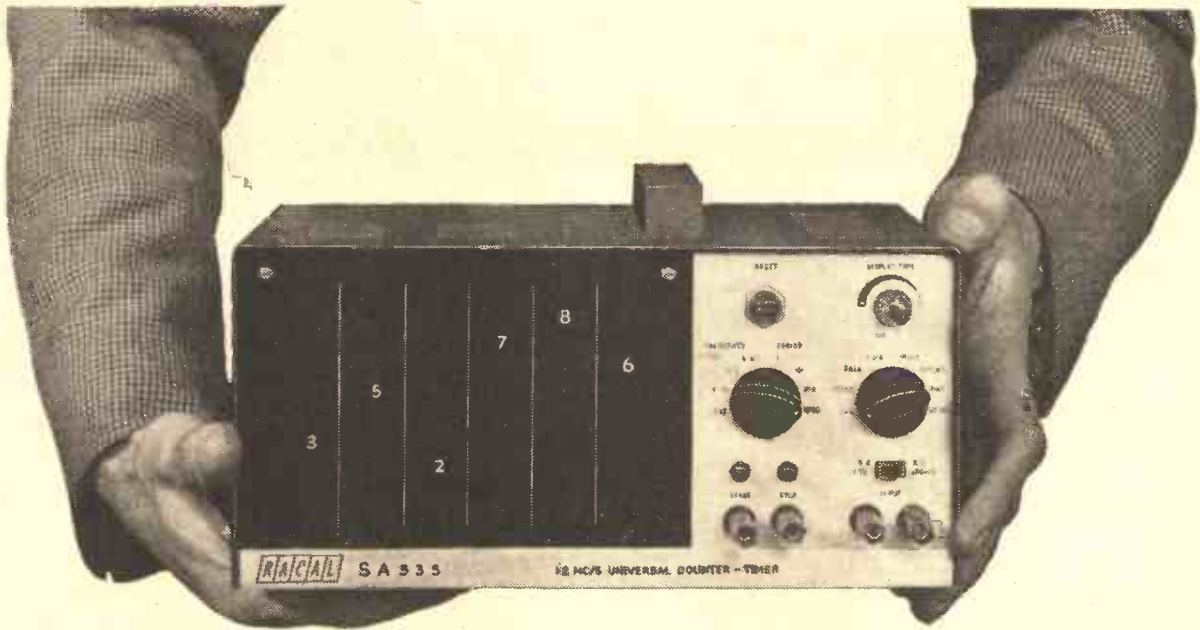

the 1.2 mc/s UNIVERSAL  
 COUNTER/TIMER  
 giving the facilities  
 you need...

- \* ILLUMINATED 6 DIGIT DISPLAY
- \* TIME, PERIOD AND FREQUENCY MEASUREMENT
- \* 100mV SENSITIVITY
- \* PRINTOUT FACILITIES
- \* CRYSTAL OSCILLATOR ACCURACY  $\pm 1$  PART IN  $10^6$
- \* OPERATING TEMPERATURE 0 - 45°C

**£195**

PACKED AND DELIVERED IN UNITED KINGDOM

For full information write today for Leaflet 231D1


**RACAL**

DIGITAL INSTRUMENTATION

RACAL INSTRUMENTS LIMITED, WESTERN ROAD  
 BRACKNELL, BERKS. TELEPHONE: BRACKNELL 941. TELEX

LATEST HIGH QUALITY COMPONENTS FROM THE MAXI-Q RANGE . . . . .

TESTED AND TRIED OVER 5 FREQUENCY RANGES

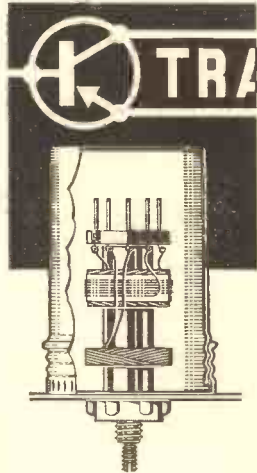

# TRANSISTOR TUNING COILS

- ★ Coils for transistor superhets or converters, with or without an R.F. stage and using 465 Kc/s or 1.6 Mc/s. I.F.
  - ★ Noval B9A Based for Plug-in application—Screw threaded for Chassis application.
  - ★ Formers moulded in low-loss polystyrene for best results.
  - ★ Each coil is packed in an aluminium container which may be used as a screening can.
  - ★ Brass threaded adjustable iron-dust cores.
- The following colour code identifies the coils:  
 BLUE —Aerial coil with base input winding.  
 YELLOW —Interstage R.F. coil with couplings.  
 RED —Oscillator coil for 465 Kc/s. I.F.  
 WHITE —Oscillator coil for 1.6 Mc/s. I.F.

**PRICE**  
4/9d. each.

Full technical details in  
 Technical Bulletin  
 DTB.4—1/6d.

Stop Press 3 Pole 3 Way 3 Bank Switch. 7s. 6d. each. 1 Pole 8 Way 4s. 3d.  
 Coverages: Range 1T—.15/4 Mc/s; 2T—.515/1.545 Mc/s; 3T—1.67/5.3 Mc/s;  
 4T—5/15 Mc/s; 5T—10.5/31.5 Mc/s.

IFT.13 Miniature 465 Kc/s. I.F. Transformer . . . . .	7/6d. each
IFT.14 Miniature 465 Kc/s. Last I.F. Transformer . . . . .	7/6d. each
IFT.16 Miniature 1.6 Mc/s. I.F. Transformer . . . . .	6/6d. each
IFT.17 Miniature 1.6 Mc/s. Last I.F. Transformer . . . . .	6/6d. each

GENERAL CATALOGUE covering full range of components, send 1/6d. in stamps. PLEASE SEND S.A.E. WITH ALL OTHER ENQUIRIES.

**DENCO (CLACTON) LTD., (DEPT. W.W.), 357/9 Old Road, Clacton-on-Sea, Essex**



1 PHASE  
AND  
3 PHASE

0.5 KVA  
TO  
250 KVA

## TRANSFORMERS

## RECTIFIER SETS

100 W                      150 kW  
 FIXED OR  
 VARIABLE OUTPUT  
 1 PHASE & 3 PHASE


Electro-Plating, Plasma, Arc Welding, Electro-Magnets, Carbon Arc, Battery Charging and other uses.

Plasma Arc Sets and other specialized equipment for gas, vacuum and powder techniques. Power Control by saturable reactors and other methods.



Variable Output  
D.C. Sources

Low Voltage High Current Rectifier Sets.

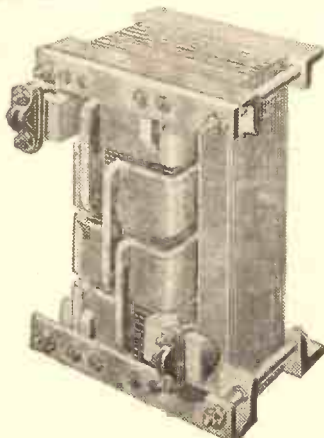

## HIGH CURRENT TRANSFORMERS

1 Phase and 3 Phase

Output currents of hundreds or thousands of amperes for Furnaces, Rectifier Sets, Heat Runs, Short Circuit Testing and other uses.

Examples: 5V300A,  
10V1,000A,  
20V3,000A,  
5V6,000A.

## VOLTMOBILE



## 64STEP ONLOAD SWITCHING AUTO-TRANSFORMERS

Output 1.6% to 100% or 125% of input volts in 64 steps or 80 steps. A control device for many loads—resistance furnaces, rectifier sets, battery charging, anodising, heating and other uses. 1 Phase and 3 Phase. 18 Models.

Output currents from 20 A to 200 A.

**HARMSWORTH, TOWNLEY & CO.**

2 Harehill, Todmorden, Lancs.

Telephone: Todmorden 602



# easy to see why electrosil glass-tin-oxide resistors are so good

#### Optical quality glass base

Glass has near-perfect qualities as the substrate of an oxide film resistor. It is impervious to moisture and can be closely matched in terms of expansion coefficients to its metal oxide coating, making for resistor stability.

#### Continuous process

All Electrosil resistors are manufactured by fusing tin oxide to the surface of freshly drawn glass in a continuous process while the glass is at red heat. A continuous process is inherently more reliable because the wide variations of batch processing cannot occur.

#### Automated production

Manufacturing is carried out on continuous fully automated production lines. Resistors are subject to full testing without being removed from the line. Grading and sorting is automatic.

#### Advanced quality assurance procedures

In addition to routine production testing, great attention is paid to quality assurance at all stages, with particular reference to noise testing and temperature-coefficients. In this way the reliable trouble-free performance of Electrosil resistors is assured.

#### Full qualification approval

Electrosil metal oxide film resistors have been accepted under the following designations—proof of their performance under the most rigorous conditions. Qualification Approval to DEF 5114A, Pattern R01-A, R01-B, R02-B, R02-C, R03-D, R03-E. Post Office Approval to D.2228A.

#### Triple Rating

The exclusive feature of Electrosil resistors whereby one resistor can be used for semi-precision, high stability or general purpose applications.

get glass-tin-oxide reliability with




Write today for full details

**ELECTROSIL LIMITED**

PALLION, SUNDERLAND, CO. DURHAM

Tel: Sunderland 71557. Telex 53273

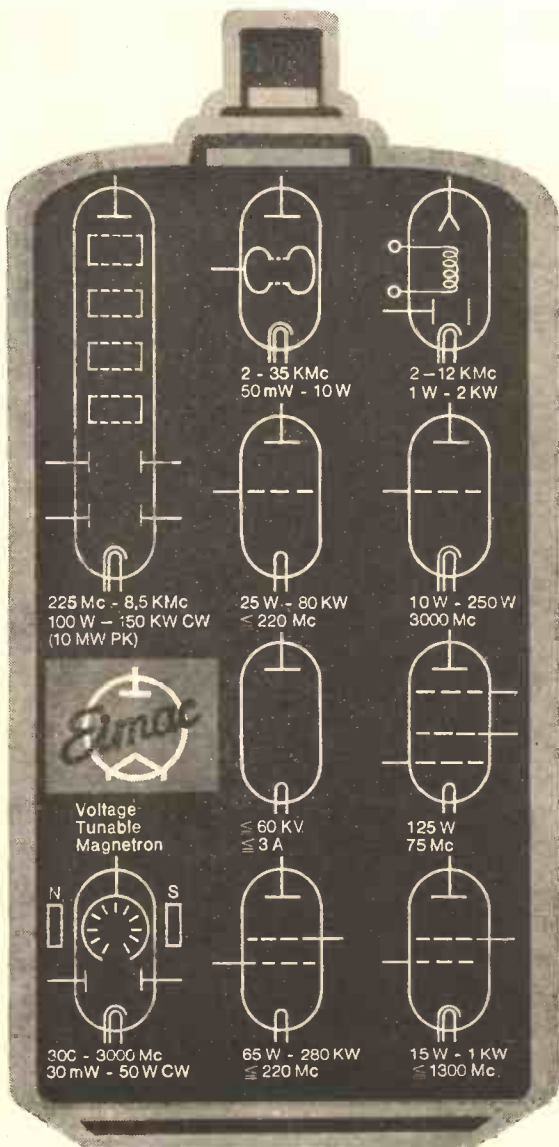

### TRANSMITTING AND MICRO - WAVE TUBES

Stocked in Geneva and sold in 59 countries.

30 years experience in manufacturing standard and custom-built quality tubes.

Call on our application engineering service for assistance with your design problems.

Write for new short form catalog.

## EIMAC

Eitel-McCullough SA, 15, rue du Jeu-de-l'Arc, Geneva, Switzerland, Tel 358930

ENGLAND Walmore Electronics, 11-15 Betterton Street, Drury Lane, London W.C.2, Tel: Temple Bar 0201-5

1WV-037 FOR FURTHER DETAILS.

## From Europe's most modern capacitor plant- Subminiature aluminium Foil capacitors in 42 standard ratings



The most modern and efficient capacitors obtainable today.



For 8 years SPS International has been producing in the U.S.A. a range of miniature lightweight capacitors designed to cope with every extreme of temperature. Now the whole benefit of this experience has been brought to the new SPS factory at Shannon, Ireland, making the same high-quality capacitors available at short notice to any part of Britain. SPS capacitors guarantee complete reliability and long life thanks to the techniques of total encapsulation perfected over a long period in the U.S.A.

Ideal for transistorized communications equipment, portable radios, hearing aids, electronic instruments, audio cross-over networks, hi-fi tuners and amplifiers, recorders, test equipment and other low voltage circuits.

**CAPACITANCE**—20% + 100% of rated capacity.

**DISSIPATION FACTOR:** Less than 8% at 50 WVDC.

**D.C. Leakage:** Less than  $6\mu\text{A}$  after 1 min. applied WVDC.

**OPERATING TEMPERATURE:** 65°C at rated WVDC.


Available in 42 standard ratings, with intermediate values at no extra cost. For complete technical information and assistance write or telephone SPS International Ltd., European manufacturing arm of a leading U.S. supplier of quality capacitors.

# SPSI

SPS INTERNATIONAL LIMITED  
SHANNON AIRPORT, IRELAND. Tel.: Shannon 245

1WV-038 FOR FURTHER DETAILS.

# Thorn Television Monitoring Equipment

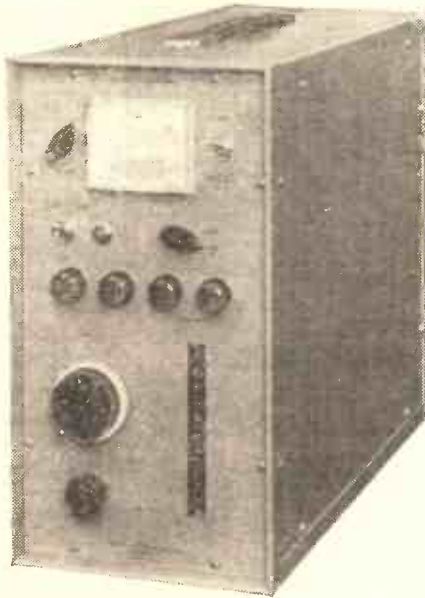


## O.B. MONITORING TELEVISION RECEIVER TYPE WJ.11

This portable weatherproof receiver provides standard level video and audio outputs suitable for feeding video monitors and associated audio equipment. No picture tube is incorporated, but a built-in loudspeaker enables the television sound channel to be monitored. The receiver is designed to accept signals in Bands I and III on the 405 line system and in Bands IV and V on the 625 line system.

Features include black level AGC and the provision of automatic frequency control on the UHF bands.

A rack mounting version, type WJ.12 is also available.

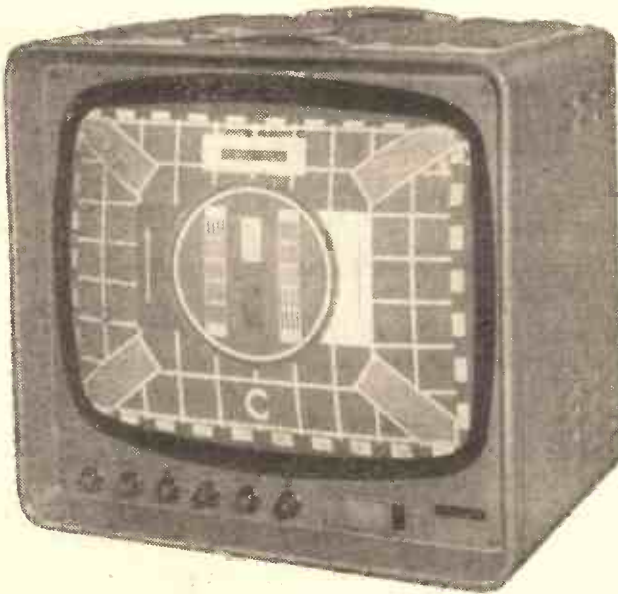

## TELEVISION PICTURE MONITORS 19"—Type VM606 23"—Type VM608

These Thorn monitors are intended for general purpose studio applications. They incorporate a 110° picture tube with bonded face plate thus ensuring minimal physical size and avoiding the need for a separate implosion guard.

Automatic or manual 405/525/625 line standard selection is provided, together with remote control of brightness and contrast. Remote selection of two alternative video inputs is also available.

The monitors feature high picture brightness with stabilised E.H.T. and 8 Mc/s video bandwidth. Picture centering controls are on the front panel. Single standard and non-automatic 3-standard models are also available.

Thorn Electronics Limited



**THORN ELECTRONICS LIMITED** Wellington Crescent, New Malden, Surrey. (MALden 8701).

A MEMBER OF THE THORN ELECTRICAL INDUSTRIES GROUP OF COMPANIES

1WW—039 FOR FURTHER DETAILS.

TE67

B

# THE LINEAR SUPER 30 HIGH FIDELITY P.A. AMPLIFIER

## TECHNICAL DETAILS:

### SENSITIVITY FOR 30 WATTS

Gram.—50 millivolts.  
Mic. 1. 5 millivolts.  
Mic. 2. 150 Microvolts.

### FREQUENCY RESPONSE

± 2 d.b. 30 c.p.s.—20,000 c.p.s.

### BASS CONTROL

+ 15 d.b. to -10 d.b. at 50 c.p.s.

### TREBLE CONTROL

+15 d.b. to -10 d.b. at 10 Kcs.

### HUM AND NOISE

-60 d.b.

### HARMONIC DISTORTION

0.5% for 30 watts.

### VALVES

Mullard ECC83, ECC83, ECC83,  
EL34, EL34, GZ34.

### NEGATIVE FEEDBACK

20 d.b.

### DAMPING FACTOR

12



RETAIL PRICE **33 Gns.**

Send S.A.E. for leaflet.

For operation on standard 200-250 v. 50 c.p.s. A.C. mains. 110/120 v. models available for export.

Trade and export enquiries invited.

**LINEAR PRODUCTS LTD.**  
ELECTRON WORKS, ARMLEY, LEEDS.

A HIGHLY  
EFFICIENT 30 WATT  
GENERAL PURPOSE  
PUBLIC ADDRESS  
UNIT

With input mixing facilities and outputs for 3·7·5·15 and 330 ohms (100y line).

A special feature of the **SUPER 30** is its high degree of stability, ensuring that the longest output leads can be used without fear of the usual troubles associated with instability.

Three high sensitivity standard Jack inputs with provision for high and low impedance microphones.

1WW-040 FOR FURTHER DETAILS.

## WEYRAD

### COILS AND I.F. TRANSFORMERS IN LARGE-SCALE PRODUCTION FOR RECEIVER MANUFACTURERS

- P.9 SERIES** 10 mm. × 10 mm. × 14 mm. Ferrite cores 6 mm. 472 kc/s operation. Single-tuned I.F.s and Oscillator Coils.
- P.55 SERIES** 12 mm. × 12 mm. × 20 mm. Ferrite cores 4 mm. 472 kc/s operation. Single-tuned I.F.s and Oscillator Coils.
- T.41 SERIES** 25 mm. × 12 mm. × 20 mm. Ferrite cores 4 mm. 472 kc/s operation. Double-tuned 1st and 2nd I.F.s and Single-tuned 3rd I.F. complete with diode and by-pass capacitor.

These ranges are available to manufacturers in versions suitable for most of the popular types of Transistors. The Oscillator coils can be modified to enable specific tuning capacitors to be used provided that bulk quantities are required.

**OUR WINDING CAPACITY NOW EXCEEDS  
50,000 ITEMS PER WEEK**

On the most up-to-date and efficient machines backed by a skilled assembly labour force for all types of coils and assemblies.

Weymouth Radio Manufacturing Co., Ltd., School Street, Weymouth, Dorset

1WW-041 FOR FURTHER DETAILS.





Museum Telephone Exchange and Radio Tower designed by the Chief Architect's Division of the Ministry of Public Building and Works Main Contractors Peter Lind & Co. Ltd.

The higher up the building goes, the more difficult becomes top-level contact with the ground. Wherever problems of communication are involved—such as are encountered in building the new GPO radio tower in London—the BCC 40 portable radiotelephone is the perfect answer.


Fully transistorised, compact and robust, with a proved consistently high performance, the BCC 40 is the natural choice for such undertakings. Designed for the particular needs of armed forces, police and fire services, it is ideal for use in industry where conditions are often equally arduous. The BCC 40 ensures reliable two-way speech communication and provides up to 6 channels in any of the VHF bands. There is also a choice of either P.M. or A.M. operation. The BCC 40 inherits the longstanding reputation of BCC equipments for high performance, reliability and endurance.



**BRITISH COMMUNICATIONS CORPORATION LTD.**



EXHIBITION GROUNDS, WEMBLEY, MIDDLESEX  
 Telephone: Wembley 1212 Telegrams: BEECEECE WEMBLEY

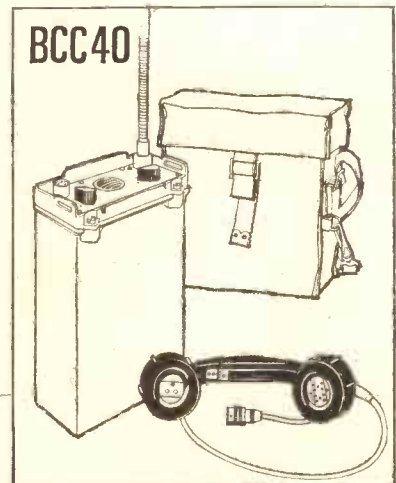

1WW—042 FOR FURTHER DETAILS.



## Measurement of Harmonic Distortion

One of the most essential measurements necessary in a high quality audio system is that of simple harmonic distortion. It is impossible to do serious development work on anything in high quality audio without measurement of this fundamental parameter.

RADFORD make the most advanced audio equipment in the world, and in order to do this it was found necessary to develop measuring instruments of a superior performance than those existing. The Low Distortion Oscillator and Distortion Measuring Set were designed by audio engineers knowing the requirements of such apparatus in audio engineering.

The Low Distortion Oscillator generates sine waves of extreme purity from 5 c/s to 250 Kc/s. The instrument also contains a valve millivoltmeter, a squaring circuit which will produce a clean 250 Kc/s square wave, and a switched 'T' 110 dB 600 ohm attenuator with facilities for continuous interpolation. The distortion of the oscillator is less than 0.005% at mid-band frequencies from its 600 ohm output attenuator. It is also capable of a very low distortion output of about 0.001% or below from the 10K ohm output position at mid-band frequencies.

The Distortion Measuring Set is a complementary equipment, and is capable of measuring extremely low distortion content. The most sensitive range on the instrument is 0.01% f.s.d. On this range it is possible to get an accurate measurement of 0.002% distortion and an indication of the order of 0.001% distortion.

The design of these instruments is described in leaflets which are available upon request.

Prices: Low Distortion Oscillator. £95.  
Distortion Measuring Set. £75.



### RADFORD ELECTRONICS LTD.

Ashton Vale Estate, Bristol, 3.

Tel. 662301/2

1WW-043 FOR FURTHER DETAILS.



## Magnoval/Novar

**McMurdo** make valveholders for Magnoval based valves with 0.04" diam. pins and Novar based valves with 0.05" pins; both types on same pitch circle. Available for printed circuit or chassis mounting. The Novar valveholders are moulded in red to avoid confusion.



Contact Assembly  
Vibrating drum  
guides contacts  
into feed line  
to the automatic  
press

## McMurdo

**McMurdo Instrument Co. Ltd.**

Rodney Rd., Portsmouth, Hants.

Tel. Portsmouth 35555. Telex 8612.

Contact our Sales Office for details of our full range

1WW-044 FOR FURTHER DETAILS.

**VACWELL ENGINEERING CO. LTD.**



**SHERMAN ROAD  
BROMLEY NORTH-KENT**  
Telephone RAVENSBORNE 9933  
Telegrams EMCO·BROMLEY  
Telex 28566


# VACWELL MASK ALIGNMENT UNIT MODEL NO. PR60

MAIN FEATURES ARE:

- ★ A DUAL IMAGE MICROSCOPE—  
EXCLUSIVE TO THIS EQUIPMENT
- ★ THE MASK AND SLICE ARE HELD  
UNDER VACUUM
- ★ THERE IS A COLLIMATED ULTRA-  
VIOLET EXPOSURE LIGHT-WITH TIMER



This PR 60 equipment is primarily intended for laboratory use but a three-position production model is also available

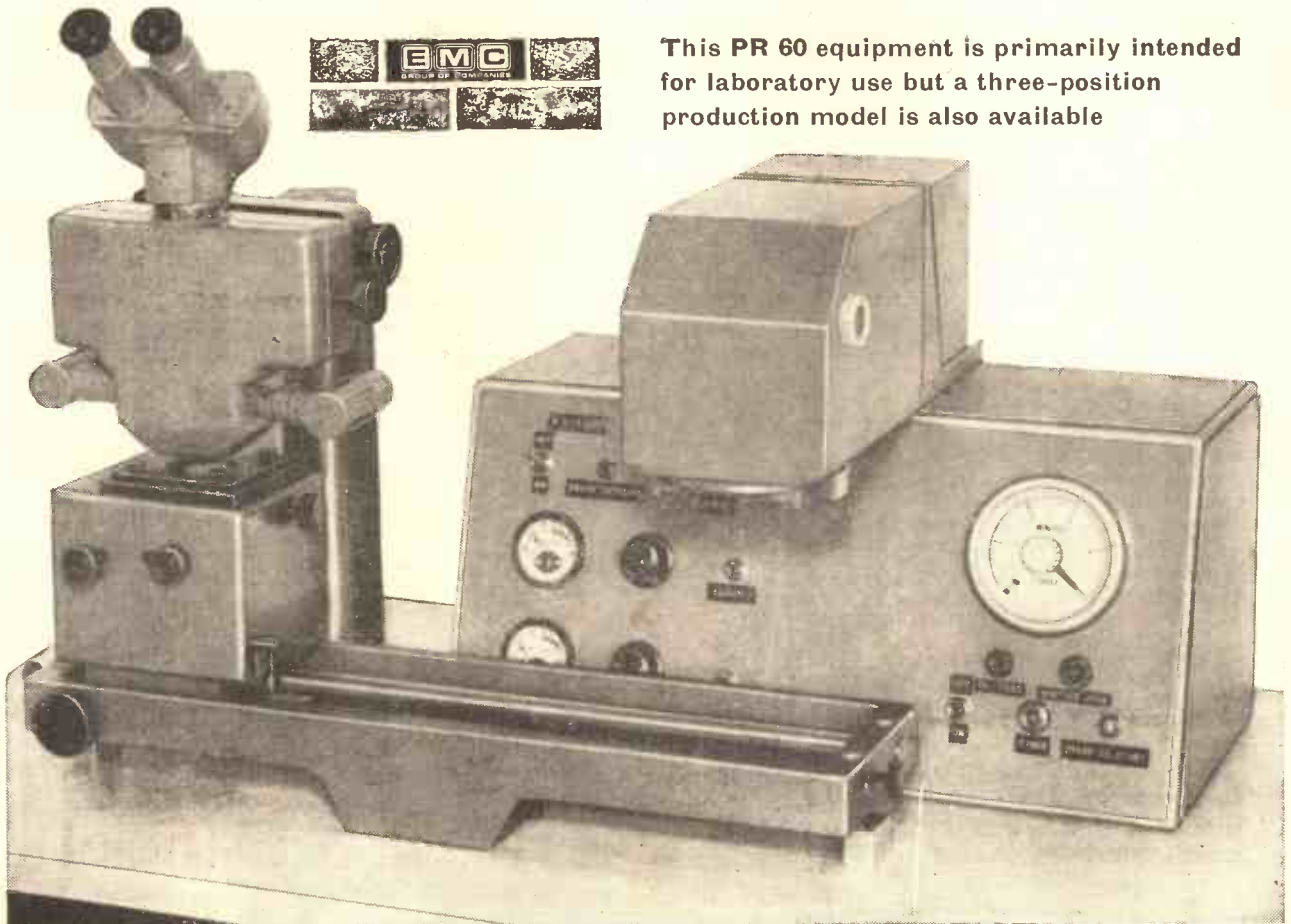

1W-045 FOR FURTHER DETAILS.

JACW/Y/I



# CHOOSE THE BEST! CHOOSE GOODMANS


## THE BEST 8" High Fidelity Loudspeaker



**AXIETTE 8**

Frequency range..... 40-15,000 c/s  
 For amplifiers up to..... 6 watts  
 (12 watts U.S.A.)  
 Fundamental resonance..... 65 c/s  
 Flux density..... 13,500 gauss  
 Impedance..... 15/16 ohms  
 Overall depth..... 3 3/8"  
 Reflex enclosure volume..... 3,000 cu. ins.  
**PRICE £4. 11. 0.** (+ 14/7d P.T.)

## THE BEST 10" High Fidelity Loudspeaker



**AXIOM 10**

Frequency range..... 40-15,000 c/s  
 For amplifiers up to..... 10 watts  
 (20 watts U.S.A.)  
 Fundamental resonance..... 45 c/s  
 Flux density..... 13,500 gauss  
 Impedance..... 15/16 ohms  
 Overall depth..... 4 1/8"  
 Reflex enclosure volume..... 5,000 cu. ins.  
**PRICE £5. 8. 6.** (+ 17/5d P.T.)

High Fidelity listening is one of the pleasures of modern living. And you can enjoy the best High Fidelity by choosing Goodmans full range High Fidelity loudspeakers.

Goodmans AXIETTE 8 and AXIOM 10 have unique design features, provide outstanding performance and can be correctly housed unobtrusively and compactly.

The Axiette 8 is for use with amplifiers up to 6 watts of power rating; the Axiom 10 handles up to 10 watts—a choice that is more than adequate for most domestic installations. And they take up so little space. The enclosures for both the Axiette 8 and the Axiom 10 are of modest dimensions—full details of enclosures designs are given in Goodmans High Fidelity Manual, send the coupon below for your free copy.



**TREBAX 5K/20XL** For really outstanding low distortion, High Fidelity performance use this pressure driven, horn-loaded High Frequency unit with an Axiom 10 to form a twin speaker system. Supplied complete with built-in crossover network (crossover frequency: 5,000 c/s) and L-pad attenuator. **PRICE £7. 7. 0.**

**BEST HEAR** these loudspeakers for yourself — at your Goodmans dealer.

# GOODMANS

GOODMANS INDUSTRIES LIMITED  
 Axiom Works • Wembley • Middlesex • England  
 Tel: WEMbley 1200  
 A Member of the Rentaset Group

Please send me a free copy of the Goodmans High Fidelity Manual.

Name.....

Address.....


.....

.....

WW1/65

# NO COMPROMISE

... for the best  
in Audio

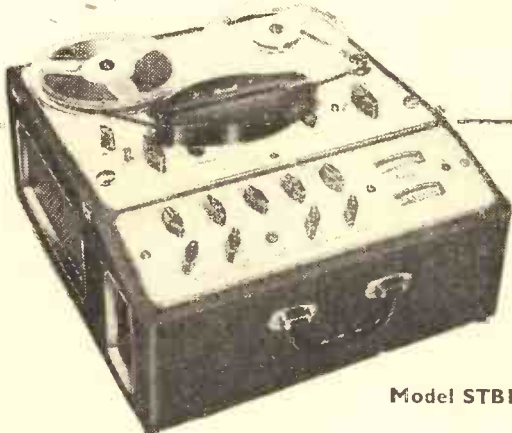

Model STBI

Every link in the chain is as vital as the next when it comes to getting the best in High Fidelity and the tape recorder is no exception.

The Brenell range of three basic machines, which covers practically every requirement, has an enviable reputation for quality of performance, ease of operation, versatility and solid dependability.

#### BASIC SPECIFICATION

(applicable to all 3 models)

4 speeds  $1\frac{7}{8}$ ,  $3\frac{3}{8}$ ,  $7\frac{1}{2}$  and 15 i.p.s. · 3 independent motors (capstan drive-hysteresis synchronous) · interlocked controls · pause control · superimpose control ·  $8\frac{1}{2}$  in. reels · fast rewind (1200ft. in 45 seconds).

Mark 5  
Type MMark 5  
Series 2

Write for full details to the sole manufacturer:

**Brenell**

**BRENELL ENGINEERING CO. LTD.**

231/5 LIVERPOOL ROAD, LONDON, N.1

Telephone: NORth 8271 (5 lines)

GD679

1WW-049 FOR FURTHER DETAILS.

YOUR TAPES ON



## PHILIPS PRO 50 RECORDER

These are some of the features that make this new series of recorders particularly suitable for editing — although they are of course completely versatile:

1. Models for  $7\frac{1}{2}$ /15 i.p.s. or 15/30 i.p.s.
2. One or two tracks on  $\frac{1}{4}$  in. tape, 3 or 4 tracks on  $\frac{1}{2}$  in. tape.
3. CCIR or NABT tape feed and equalisation.
4. Ferrite heads for long life, maintained quality, precise alignment of multiple gaps, and easy maintenance.
5. Electronic tape tension control.
6. Press-button operation.
7. Finger gaps in headblock for ease of tape handling.
8. Tape lifted during rewind from all heads or in contact with play-back head only if required.
9. Push-button cutting or marking of tape on replay head.
10. Photo-electric tape stop, operating at end of tape or on transparent insert.



The PRO 50 is one of a new range of Philips Tape Recorders which covers every requirement of high grade professional sound recording: the PRO 20 transportable; the PRO 25 for highest quality studio recording; the PRO 50, particularly suitable for heavy duty operation; and the PRO 70 for multi-channel recording and for dubbing, post-synchronising and transfer.

**PETO SCOTT ELECTRICAL  
INSTRUMENTS LIMITED**  
SOUND & VISION SYSTEMS

Addlestone Road, Weybridge, Surrey  
Telephone Weybridge 45511 Telex 262319  
Philips Professional TV and Sound Systems.

1WW-050 FOR FURTHER DETAILS.



EDM15



EDM20



EDM30

Illustrations  
actual size

# Erie Dipped Mica

## PLATE CAPACITORS

ERIE STYLE	EDM15	EDM20	EDM30
Volts Wkg d.c.	Capacitance-pF		
300	10-820	20-12000	510-30000
500	10-470	20- 8200	510-16000

The dip-coated silver-mica construction of the Erie EDM Series Capacitors provides outstanding stability, reliability and close tolerance characteristics coupled with versatility.

Operating temperature range:  
-55°C to +125°C

Capacitance tolerances:  
±10% and ±5%

Q factor:  
1000 minimum\*

Temperature Coefficient:  
Generally -0 to +70 ppm/°C†

\*except for very low values  
†except for low values

Write for EDM literature



**ELECTRONIC COMPONENTS**

ERIE RESISTOR LIMITED GREAT YARMOUTH NORFOLK Telephone 4911 Telex 1720

1WW-051 FOR FURTHER DETAILS.

**HOW TO  
TAKE THE  
PLUG OUT  
OF T.V.**



TV sets as portable as transistor radios and running on dry batteries are now possible. The working prototype sets seen by the public for the first time on the Ever Ready stand at the Radio Show, evoked tremendous interest. Their circuits, developed by Ever Ready in conjunction with Thorn Electronics Ltd., are available to any manufacturer interested. Their battery, the Ever Ready TV1 is ready now. Production is geared to meet all market requirements. If you have not yet seen these remarkable sets and batteries Ever Ready's Central Laboratories will be pleased to demonstrate the receivers and supply sample batteries which have many other new applications. Telephone or write for an appointment now to Mr. B. H. Williams, Technical Sales Manager.




**Batteries  
for longer life!**

THE EVER READY CO. (GB) LTD · HERCULES PLACE · HOLLOWAY N7 · ARCHWAY 303D  
1W—052 FOR FURTHER DETAILS.

## EDDYSTONE COMMUNICATION RECEIVERS

For the professional or Amateur user who likes the Best.

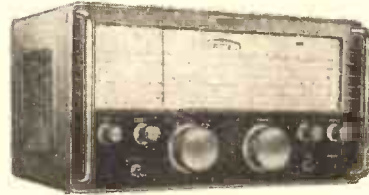

840C

£62

Communication receiver at a moderate price. MANUFACTURING STANDARDS OF THE HIGHEST ORDER. 8 B8A valves Superheterodyne circuit. **FREQUENCY RANGES**

Range 1... 12.4—30 Mc/s. Range 4... 1.12—2.58 Mc/s.  
Range 2... 5.2—12.9 Mc/s. Range 5... 480—1150 kc/s.  
Range 3... 2.5—6.1 Mc/s.

Ranges 4 and 5 include the International Distress Frequencies. Sensitivity better than 10 microvolts. Selectivity 30 db down at 10 kc/s. off resonance. AC/DC. Internal speaker.

### HIRE PURCHASE TERMS

Model No.	Cash Price	Deposit	12 Mthly.	24 Mthly.
			Payments	Payments
870A	£34 8 9	£5 0 0	£2 12 6	
840C	£62 0 0	£12 0 0	£4 8 3	£2 6 6
940	£125 0 0	£25 0 0	£8 16 6	£4 14 6
EC10	£48 0 0		Transistorised Receiver.	

CONFIDENTIAL TERMS. YOU DEAL SOLELY WITH H.P. RADIO.  
Carriage paid per passenger train. SATISFACTION GUARANTEED



The Eddystone  
Specialists

SERVICES LTD.

49/51 COUNTY RD.,  
LIVERPOOL, 4

Telephone: AINTREE 1445

ESTAB. 1935

1W—053 FOR FURTHER DETAILS.

## M. R. SUPPLIES, Ltd.

(Established 1935)

Universally recognised as suppliers of UP-TO-DATE MATERIAL, which does the job properly. Instant delivery. Satisfaction assured. Prices nett.

**AIR BLOWERS.** Highly efficient units fitted induction totally enclosed motor, 230/260 v. 50 c. 1 ph. Model SD.26, 80 CFM (free air) to 11.5 CFM at .15 WG, size approx. 6 x 7 x 7 in. Outlet 2 1/2 in. square £8/10/- (des. 5/-). Model SD27, 120 CFM (free air) to 40 CFM at 1.2 WG, 8 x 7 x 9 in. outlet 2 1/2 in. sq. £11/15/6 (des. 5/-). Model SD28, 200 CFM (free air) to 127 CFM at 1.5 WG, 11 x 8 x 9 in. outlet 3 in. sq. £13/17/6 (des. U.K. 7/6).

**COMPLETE SEWING MACHINE MOTOR OUTFITS.** No better job obtainable any price. 200/250 v. A.C./D.C. Fitted latest radio/T.V. suppressors. Comprising motor with fixing brackets, foot control and switch, needle light with switch, belt, etc. and instructions for easy fixing to ANY machine. The complete outfit £6/18/6 (des. 3/6).

**SYNCHRONOUS TIME SWITCHES** (Our very popular speciality). All for 200/250 v. 50 c. for accurate pre-set switching operations. Sangamo S.254, providing up to 3 on-off operations per 24 hours at any chosen time, with day-omitting device (vice optional). Capacity 20-amps. Compactly housed 4 in. dia. 3 1/2 in. deep. With full instructions. £5/18/6 (des. 3/-). Also, same make, same duty, Domestic Model fitted with 13-amp plug for easy installation, same price. Also Paragon, 220/250 v. 50c. with 7-day dial providing for operations on four separate circuits (2 makes 2 breaks) at any required time during each day, capacity 20 amps each circuit, in metal housing 7 in. x 4 in. x 1 1/2 in. wall mount, £11 (des. 5/-). Also very limited offer Sangamo £14/10/- units, brand new, 200/250 v. 50c. with 24-hour spring reserve. Up to 3 on-off operations per 24 hours. 20-amp switching. £7/10/- (des. 3/-).

**MINIATURE RUNNING TIME METERS** (Sangamo) 200/250 v. 50c. synchronous. Counting up to 9,999 hours with 1/10th indicator. Only 1 1/2 in. square with cyclometer dial, depth 2 in. Ideal for use with modern equipment. Immediate delivery 60/-.

**SMALL GEARED MOTORS.** In addition to our well-known range (List GM/361) we offer smaller open type S.P. units, 200/250 v. A.C., e 1, 6, 12, 20 or 60 r.p.m. Size approx. 4 1/2 in. x 2 1/2 in. x 2 in. with 1 in. shaft prof. Suitable for display work and many industrial uses. Only 69/6 (des. 2/0).

**SYNCHRONOUS ELECTRIC CLOCK MOVEMENTS** (as mentioned and recommended in many national journals), 200/250 v. 50 c. Fitted with spindle for hours, minutes and central sweep seconds hands. Self-starting, central one-hole fixing. Dia. 2 1/2 in. Depth behind dial only 1 in. With back dust cover 29/6 (des. 1/6). Set of three hands, brass, in good plain style. For 5/7 in. dial 2/6. For 8/10 in. dial 3/6 set.

**EXTRACTOR FANS.** Final offer of this very popular and efficient model complete with outside cowling and indoor shutter. Circular motor housing only 4 1/2 in. dia. Easily mounted in small window pane. Silent induction motor. 200/250 v. A.C. (no interference), 3,500 c.f.t./hr. Instructions with each. Only 69/6 each (despatch 3/6). We also supply our 8 in. model at £5/5/- and 10 in. model at £5/12/6 (despatch 3/6). These models are not supplied with outside cowling. Details on request.


**SYNCHRONOUS TIMER MOTORS** (Sangamo) 200/250 v. 50 c/s. Self starting 2 in. dia. x 1 1/2 in. deep. Choice of following speeds 1 r.p.m., 12 r.p.h., 1 r.p.h., 1 rev. 12 hrs., 1 rev. per day. Any one 39/6 (des. 1/6). Also high-torque model (G.E.C.) 2 1/2 x 2 in. x 1 1/2 in., 6 r.p.m. 57/6 (des. 1/6).

**IMMEDIATE DELIVERY** of Stuart Centrifugal Pumps, including stainless steel (most models). Philips Variable Transformers (all models).

M. R. SUPPLIES, Ltd., 68, New Oxford Street, London, W.C.1  
(Telephone: MUSEum 2958)

1W—054 FOR FURTHER DETAILS.



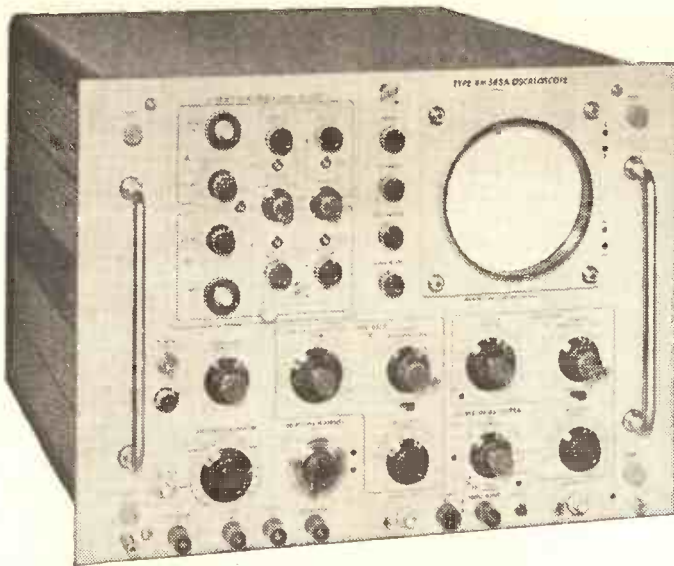

# 85 Mc/s

# TEKTRONIX 585A

## NEW MEASUREMENT CONVENIENCE FOR HIGH-SENSITIVITY, WIDE-BAND, DUAL-TRACE APPLICATIONS

**DUAL-TRACE OPERATION** with 4 operating modes and independent controls for each channel—for individual attenuation, positioning, inversion, and ac or dc coupling as desired.

**PASSBAND** typically DC-TO-85 Mc/s (3-db down) at 100 mv/cm (12-db down at 150 Mc/s), and typically DC-TO-80 Mc/s (3-db down) at 10 mv/cm.

**CALIBRATED SENSITIVITY** in 9 steps from 100 mv/cm to 50 v/cm, and in 10X Amplifier Mode, from 10 mv/cm to 5 v/cm, variable between steps.

**INTERNAL AND EXTERNAL TRIGGERING** to 150 Mc/s.

**SWEEP RANGE** from 10 nsec/cm to 2 sec/cm.

**SINGLE SWEEP PHOTOGRAPHY** at 10 nsec/cm.

**BRIGHT, HIGH-RESOLUTION DISPLAY** with small spot size.

**CONVENTIONAL PASSIVE PROBES** for convenience.

### PLUS

**COMPATIBILITY WITH 17 LETTER-SERIES PLUG-INS** to permit differential, multi-trace, sampling, other laboratory applications—when used with Type 81 adaptor.

**AVAILABLE BENCH MOUNTING 585A—£729 or RACK MOUNTING RM585A—£773**

**TYPE 82 DUAL-TRACE PLUG-IN UNIT—£270**



Full details and prices from


**Tektronix U.K. Ltd.** Beaverton House · Station Approach · Harpenden · Herts  
Telephone: Harpenden 61251 · Telex: 25559

For overseas enquiries:—

TEKTRONIX Ltd, Albany House, St. Peter Port, Guernsey, C.I. · TEKTRONIX CANADA Ltd, Montreal, Quebec & Toronto (Willowdale), Ontario  
TEKTRONIX AUSTRALIA PTY. Ltd, P.O. Box 488, Sydney, New South Wales  
TEKTRONIX INTERNATIONAL A.G., P.O. Box 57, Zug, Switzerland

TEKTRONIX INC, P.O. Box 500, Beaverton, Oregon, USA

1WW—055 FOR FURTHER DETAILS.

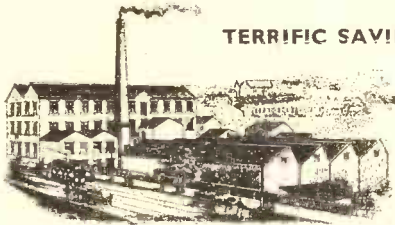


TERRIFIC SAVING ON

# ELECTRIC BLANKETS

from Europe's largest electric blanket mill with an available output in excess of 2,500 electric blankets a day. Not a job lot or from a lock-up shop. These blankets are factory fresh.

Make no mistake about it these are the finest electric blankets you can buy at anywhere near this price. Study these features:

- ★ Top quality Yorkshire woven blanket cloth. B.S.I. passed for strength and inflammability with element in specially woven channels of our own make.
- ★ Satin bound all round and fitted with eyelets complying with latest B.S.I. ruling for fastening to bed.
- ★ This blanket is fitted with a Crater Double Pole switch for complete electrical isolation from mains. (The switch retails at 8/-)
- ★ Non kink B.S.I. lead.
- ★ Entire blanket circuit (excl. switch) completely water-proof and flame-proof.
- ★ Beautiful pastel shades of pink, lemon, salmon, lilac, blue, green.
- ★ Every blanket tested three times to ensure completely up to standard.

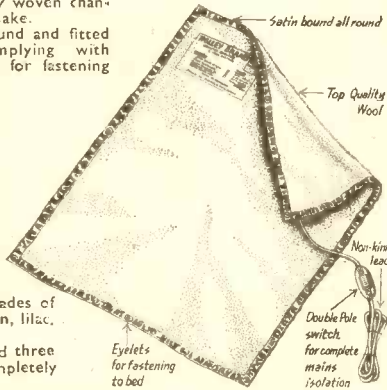

Remember only blankets with these features are completely safe.

These blankets are made in same high quality wool cloth as woven and supplied by us to manufacturers charging double our price for blankets sold under their own names.

## PRICES

### All Wool Minimum Size

Four Poster—

54in. x 26in. 45/-

54in. x 48in. 70/-

Carriage and P.T. paid on two or more blankets. Carriage and packing 3/- on individual orders.

## MIXTURE CLOTH

The lowest priced electric blanket available today, with all the above features, comes to you in beautiful fleecy blanket material in a galaxy of colours delighting the eye and selling the product.

48in. x 24in. 37/6 48in. x 40in. 48/- switch 3/- extra.

Special prices for quantity and callers at the mill. All in magnificent sales boxes that spell quality. Cash with order. Millions of beds have no electric blanket. At our prices NONE should be without.

★ EVERY BLANKET UNCONDITIONALLY GUARANTEED FOR THREE YEARS ★

Also quality Bri-Nylon fireside rugs and Terylene quilted eiderdowns made by Associated Mills. Please send for lists (for example, 48in. x 26in. Bri-Nylon fireside rug—50/- tax paid). Quilts from 25/-. SAMPLE TODAY—EARN TOMORROW.

We are suppliers to the largest commercial houses in the country. BLANKETS MADE ON COMMISSION—YOURS OR OUR NAME.

**ELECTRO WOOL PRODUCTS LTD.,**  
 CODDY MILLS, BRADFORD ROAD, BATLEY, YORKS.  
 Tel.: Batley 1808

1WW-056 FOR FURTHER DETAILS.

## SPECIALIST SWITCHES LTD

# the fastest switch service in the world

### ROTARY AND LEVER TO SPECIFICATION

New customers are generally very surprised when we tell them their order will be despatched today or tomorrow-latest. They are even more surprised when they receive the switches on time. They eventually get used to all their following orders also turning up within 24 hours—and they keep coming back.

### Where's the catch?

There is no catch. There are one or two limitations of course—all switches have 2in. long spindles, with no locating lugs, but this is a small price to pay for the fastest service in the world.

### The Secret

We only make small quantities of switches to specification—We do nothing else. We are small and flexible—We need the minimum of internal paperwork—We are SPECIALIST SWITCHES.

Quantities: 1 to a dozen or so—24 hours. Around, say, 250—7 to 10 days. If you want more—come to us for your earliest requirements and go to the 'big three' for the rest.

Ask for details and prices:

### SPECIALIST SWITCHES LIMITED

79a DUKE RD · LONDON W.4 · Paddington 8866-7

1WW-057 FOR FURTHER DETAILS.

## ORCHARD & IND LIMITED

### LOOSE LEAF BINDER DIVISION

Prestige Covers for all purposes, including:

### Lightweight binders for—

Brochures  
 Specifications  
 Estimates  
 Bulletins  
 Catalogues

Many new types and styles of fittings

Heavy Duty Binders for Workshop  
 Manuals, Parts Catalogues, etc.

Write for new Catalogue

Enquiries to:

Head Office,

Northgate, GLOUCESTER

Telephone: (OGL2) 22111 (5 lines)

1WW-058 FOR FURTHER DETAILS.

# TODAY'S SOUND IS

# Stentorian



### MODEL H.F.1012 SPEAKER

10 in. die-cast unit, incorporating 12,000 gauss magnet. Fitted with cambric cone and universal impedance speech coil providing instantaneous matching at 3, 7.5 and 15 ohms. Handling capacity 10 watts. Frequency response 30 c.p.s. to 14,000 c.p.s. Bass resonance 35 c.p.s.



### T.359 CONE TWEETER

Provides a very high standard of reproduction when used in conjunction with 'Stentorian' 10 in. or 12 in. units. Incorporates High Sensitivity 9,000 gauss magnet, special cone and lightweight coil. Frequency response: 3,000-15,000 c.p.s. Overall size: 3 in. dia. x 2 in. deep. Voice coil impedance: 15 ohms or 5 ohms. Power handling capacity: 15 watts when used with a 3,000 c.p.s. crossover.



### SPEAKERS

Type	Flux Density	Price
10in. H.F.1016 'Major'	16,000 gauss	£9 8 6
10in. H.F.1016	16,000 gauss	£7 7 0
10in. H.F.1012	12,000 gauss	£4 12 0
8in. H.F.816	16,000 gauss	£6 6 0
8in. H.F.812	12,000 gauss	£3 16 6
8in. H.F.810	10,000 gauss	£2 17 0

### TWEETERS

Type	Flux Density	Price
T359 tweeter	9,000 gauss	£1 12 3
T816	16,000 gauss	£5 19 3
T12 tweeter	16,000 gauss	£13 17 9
T10 tweeter	14,000 gauss	£4 12 9

### THORESBY CABINETS


Type	Height	Width	Depth	Price (Mahogany)	Price (Walnut)
Bass Reflex Console Cabinet	31in.	19 <sup>3</sup> / <sub>8</sub> in.	18in.	£12 17 6	£13 5 0
Hi Fi Equipment Console	31in.	19 <sup>3</sup> / <sub>8</sub> in.	18in.	£15 0 0	£15 10 0
Bass Reflex Corner Console	31in.	19 <sup>3</sup> / <sub>8</sub> in.	17in.	£11 17 6	£12 2 6
Slim-Line Cabinet	31in.	20in.	9 <sup>1</sup> / <sub>2</sub> in.	£10 5 0	£10 10 0

### THORESBY SLIM-LINE CABINETS

This enclosure has been designed to accommodate any of the Stentorian range of 8 in. or 10 in. units. Provision is made for the addition of either pressure or cone type tweeter and a crossover may be used.



**WHITELEY ELECTRICAL RADIO CO. LTD**  
**MANSFIELD · NOTTS**  
 Telephone: Mansfield 1762/5

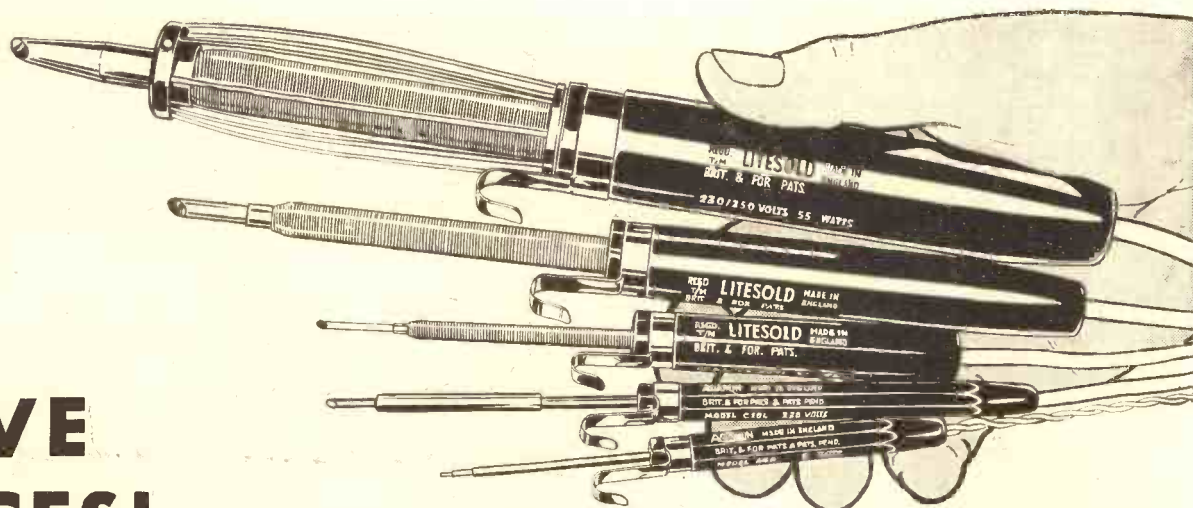

## FIVE ACES!

This is a hand that can't be beaten. Five models from our tremendous range of soldering instruments. Superb performance. Amazingly compact. Developed to simplify YOUR soldering. Copper bits for greatest speed.

Permatip bits for long life. May we deal you in ?

Brochure W5 post free on request.

**LIGHT SOLDERING DEVELOPMENTS LTD.,** 28, Sydenham Road, Croydon, Surrey.

Telephone: CROYDON 8589

1WW-060 FOR FURTHER DETAILS.

## The Lexor "DIS-BOARD" for INSTANT MAINS

HIGHLY VERSATILE  
PORTABLE POWER  
DISTRIBUTION  
BOARDS



OVER 300  
COMBINATIONS  
AVAILABLE FROM STOCK

Full literature and price lists from:

**LEXOR DIS-BOARDS LIMITED**  
ALLESLEY OLD ROAD COVENTRY

1WW-061 FOR FURTHER DETAILS.

## IMPEX ELECTRICAL LIMITED

1 GOWER ST., LONDON, W.C.1 MUSEUM 9777

### IMPEX SEMICONDUCTORS

Supplies are available of fully tested semiconductors with slightly relaxed specifications. Continuity of supply is always assured. Availability list upon request.

S31T p-n-p audio frequency transistor similar to OC81  $V_{CE}$  max. = -9V;  $V_{BE}$  max. ( $I_C = 1.5mA$ ) = -200mV;  $V_{BE}$  max. ( $I_C = 300mA$ ) = -750mV;  $I_{CBO}$  ( $V_{CB} = -9V$ ) < 25 $\mu$ A;  $h_{FE} > 100$ .

S91T silicon junction transistor similar to OC204  $V_{CB}$  max. =  $V_{CE}$  max. = -14V;  $I_{E}$  max. = 450mA;  $I_B$  max. = 90mA;  $I_{CO}$  ( $V_{CE} = -6V$ ) < 0.3 $\mu$ A;  $f_T$  ( $V_{CE} = -6V$ ,  $I_C = 1mA$ ) = 1.5 Mc/s.;  $h_{FE} > 14$ .

S3R germanium general purpose point contact diode. P.I.V. 22V.

TRADE ONLY

1WW-062 FOR FURTHER DETAILS.

## The only all-in T.V. tester


THE AIRMEC TELEVET TYPE 259 is the ONLY complete Television Tester — it has every facility for thoroughly checking, repairing, overhauling and aligning TV sets. It covers Bands 1 and 111, crystal calibration. Can be used with AC/DC type sets. Completely portable. Incorporates: Wobbulator · AM or CW Signal Generator · Pattern Generator · Audio Oscillator · AC and DC (including EHT) voltage measuring facilities · Line transformer test.

WRITE NOW for full details!

Immediate delivery

Airmec also make the RADIVET TYPE 211, for AM and FM Receivers.

**Airmec Ltd** HIGH WYCOMBE BUCKS Tel: High Wycombe 21201/10

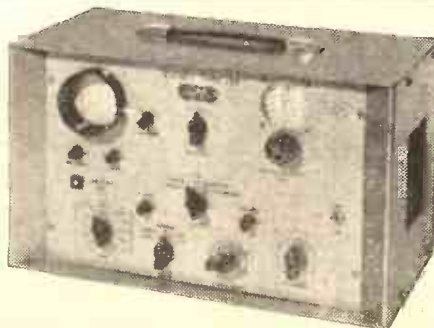


1WW-063 FOR FURTHER DETAILS.

**SWITCH TO**



*and forget fluctuating voltage*

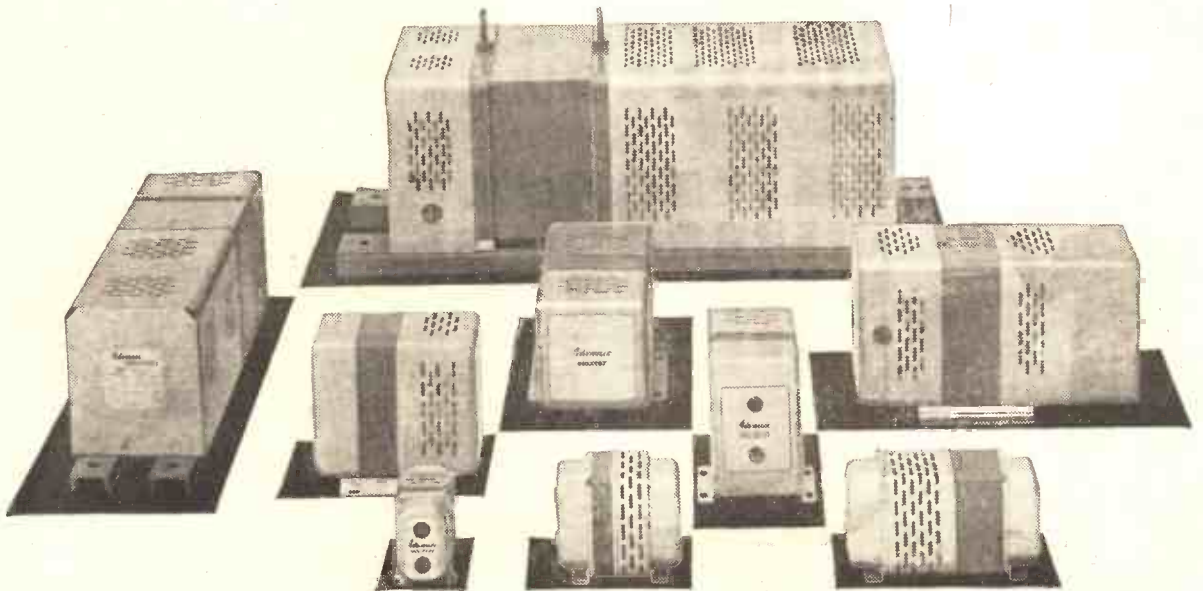

**CONSTANT VOLTAGE TRANSFORMERS**

There are VOLSTAT Constant Voltage Transformers from 15W to 10kW rating (and others to special design) to keep your equipment operating in the factory or in the field no matter how the voltage supply is fluctuating. Stabilisation to  $\pm 1\%$  is continuous and automatic from no load to full load, for supply variations of  $\pm 15\%$ . VOLSTATS are used throughout the world in a variety of equipments such as:

**Measuring Instruments, Hospital Equipment, Control and Computing Installations, Photographic and Photometric Devices.**

VOLSTAT types CVN and CVS have all the advantages of the CVT range with, in addition, reduced harmonic distortion limited to less than 5%.

If fluctuating voltage affects your production or your products a VOLSTAT is the answer. *For further technical details please write to*




AVZA

**ADVANCE ELECTRONICS LIMITED**

ROEBUCK ROAD, HAINAULT, ILFORD, ESSEX. TELEPHONE: HAINAULT 4444

1WW-064 FOR FURTHER DETAILS.

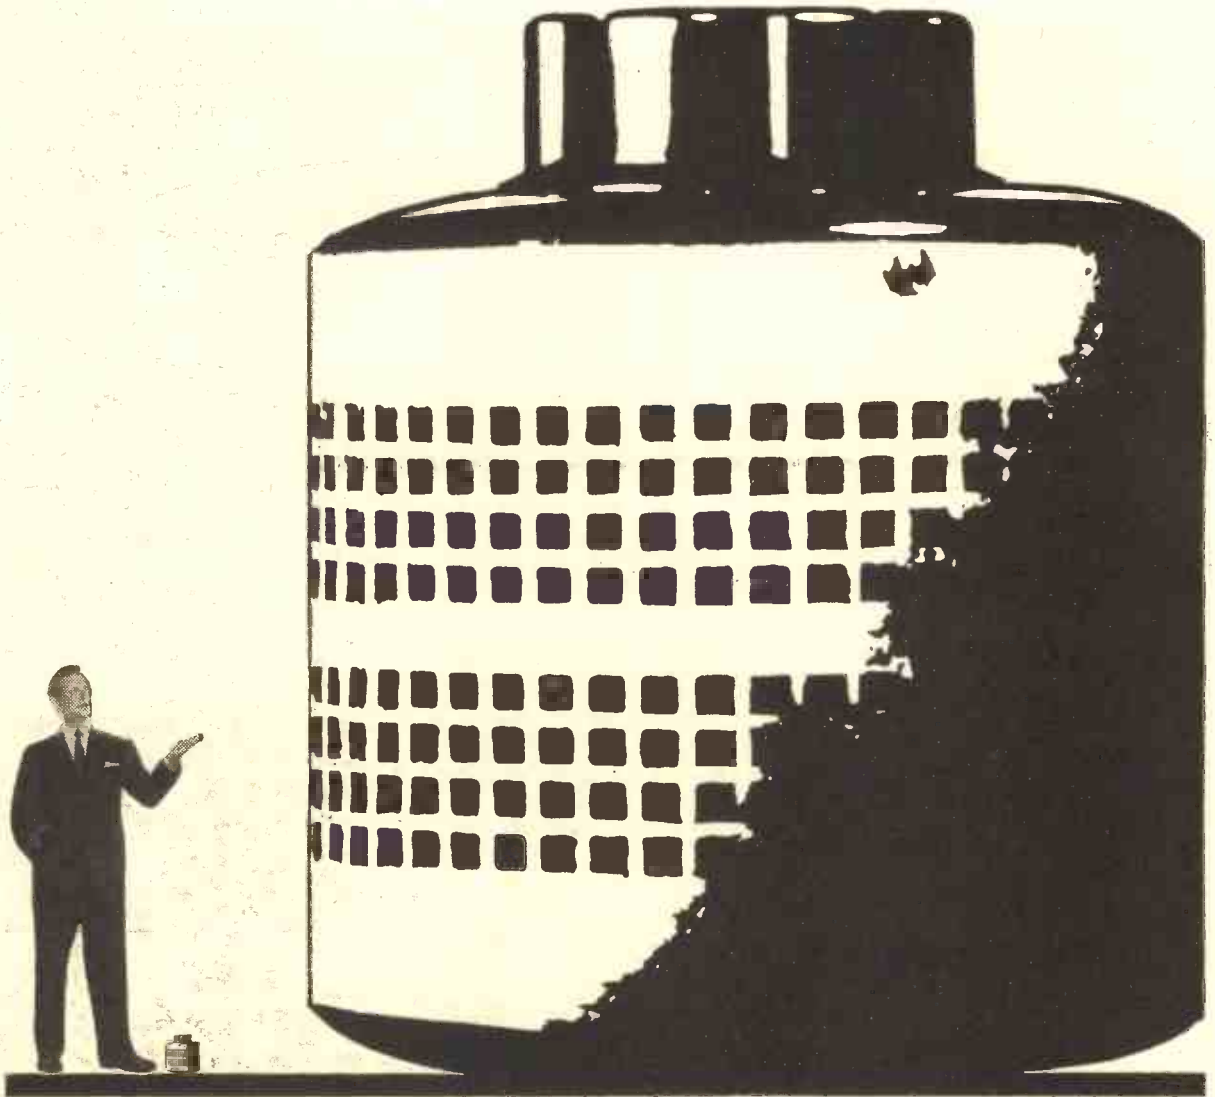

**THE VARIAC\*** variable transformer is the most useful and versatile device ever developed for the control of a.c. voltage, or of current, power, heat, light, speed. It provides smooth continuous adjustment of output voltage from zero to line voltage and above, either hand-operated or motor-driven.

Only Variac has Duratrak\*—a patented track surface giving longer life, increased overload and surge capacity and maximum economy in maintenance.

There are over 600 Variac models and assemblies to suit virtually every possible requirement, ranging from small units for laboratory or instrument use to large ganged assemblies for high power 3-phase operation. The range includes low-voltage, high-frequency, dual-output and narrow-range types, open, covered, portable, metalclad and oil-immersed constructions, plus many special models. This is the largest range of variable transformers available today.

The technical superiority and dependability of Variac are the result of over 30 years of development and refinement since the introduction of the first Variac models—the *original* variable transformers.

\*'Variac' and 'Duratrak' are registered trade marks

# Variac

REGD

the original and best  
variable transformers

Variacs are made in England by The Zenith Electric Co. Ltd. London, and exclusively distributed in the U.K. Eire and British Colonies by Claude Lyons Ltd.

Write for comprehensive catalogue to Publicity Department, Hoddesdon

## CLAUDE LYONS LTD

1WW-065 FOR FURTHER DETAILS.

Valley Works, Hoddesdon, Herts Hoddesdon 4541 Telex 22724  
76 Old Hall Street, Liverpool 3 MARitime 1761 Telex 62181

**for the  
modern  
studio**



—where every piece of equipment must measure up to professional standards of performance and dependability

—there the **LEEVERS-RICH STUDIO RECORDER** takes pride of place.

Ask the man who uses one!

Series E console (illustrated above) with **FULL** remote control, single track from £640.

There is a complete range of portable, console and rack mounted recorders for single or multi-track use, and a fully automatic version with photo electric programming system.

Special facilities can be provided to order.

Write for full information:

**LEEVERS-RICH EQUIPMENT LTD.**

319b Trinity Road, London, SW18  
VANDYKE 9054

**LEEVERS-RICH**

1W.W.—066 FOR FURTHER DETAILS.

**Cinch**  
TRADE MARK

sub-miniature  
connectors  
with die-cast shell



30/2

Small, light, and exceptionally reliable, these connectors are available in 9, 15, 25, 37 and 50 ways. They have a current rating of 5 amps per contact, a working voltage of 75V D.C., a contact resistance of 1.9 milliohms (max), and an insulation resistance greater than 5,000 MΩ. For certain applications floating mounting bushes can be supplied and for cable terminating applications a range of aluminium alloy die-cast shells is available. These have an angled cable entry with semi-permanent cable locking bar and a vibration-proof spring clip which locks the assembly together to avoid accidental disengagement of the mating parts.

**CARR FASTENER CO LTD**

*the firm with the best connections*


Stapleford, Nottingham · Tel: Sandiacre 2661

York House, Empire Way, Wembley, Middlesex. DILigence 1255/9  
Crossford Court, Dane Rd, Sale, Cheshire. Telephone Sale 4213/4

1W.W.—067 FOR FURTHER DETAILS.

**Cinch**  
TRADE MARK

# NOMBREX INSTRUMENTATION

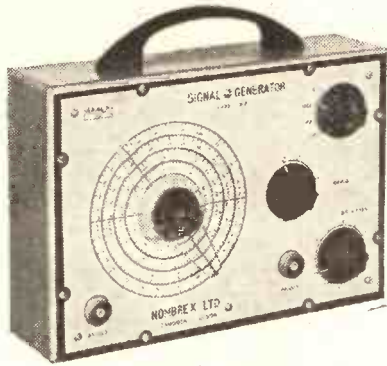

**Wide-range Transistorised  
SIGNAL GENERATOR—Model 27.**  
Range 150 Kc/s. to 350 Mc/s.  
★ Accuracy better than 2%.  
★ Directly calibrated.  
★ Battery operated.  
★ Compact and light.

**£9.12.3**

with test lead and battery. Post and packing 3/6 extra.

## EXPORT

We invite applications for appointment as distributors or agents in overseas territories, by companies or other organisations with adequate facilities for sales promotion and distribution in the radio and electronics industry.

We can quote keen c.i.f. export prices on our range of instruments, with reliable deliveries. Write to—

Export Sales Dept.,  
Instruments Division.



## Transistor Regulated POWER UNIT—Model 61.

Regulated Output 1-15 Volts.  
★ Indispensable for equipment testing.  
★ Automatic overload protection.  
★ Mains operated—negligible consumption.  
★ Eliminates expense of batteries.

**£6.10.0**

Post and packing 3/6 extra.

Trade and Export Enquiries Invited

S.A.E. For Full Technical Leaflets

# NOMBREX LTD.

## INSTRUMENTS DIVISION

ESTUARY HOUSE, CAMPERDOWN TERRACE,  
EXMOUTH, DEVON. PHONE 3515.

1WW-068 FOR FURTHER DETAILS.

## WHY PAY ££££'s MORE FOR SUPER REGULATION YOU MAY NEVER NEED?

FIXED or VARIABLE High Current outputs of 12-24v. up to 24A. standard (other units available to order).

Ripple content negligible. Impedance and regulation equivalent to accumulator performance. Output impedance .4 ohm at 100 c/s. Effective resistance .1 ohm. Inadvertent "short" protection. Long life. Silicon rectifiers, fully smoothed, sustained performance low impedance.

**STANDARD APPLICATIONS OPERATING AND SERVICING TRANSISTORISED EQUIPMENT. MOBILE V.H.F. R/TEL., D.C. MOTORS, RELAYS, INDUSTRIAL POWER, etc., etc. DIRECT FROM A.C. WITHOUT THE USE OF ACCUMULATORS.**

PRICES: £14/16/- to £131/5/-.

Please write to department C.3b for DC power supply leaflet.

**Valradio**  
LIMITED




250VRU/30/20

Browells Lane, Feltham, Middx. Tel.: Feltham 4242  
Valradio and Stereosonoscope are the registered trade marks of Valradio Ltd.

1WW-069 FOR FURTHER DETAILS.

## PAPST-FANS

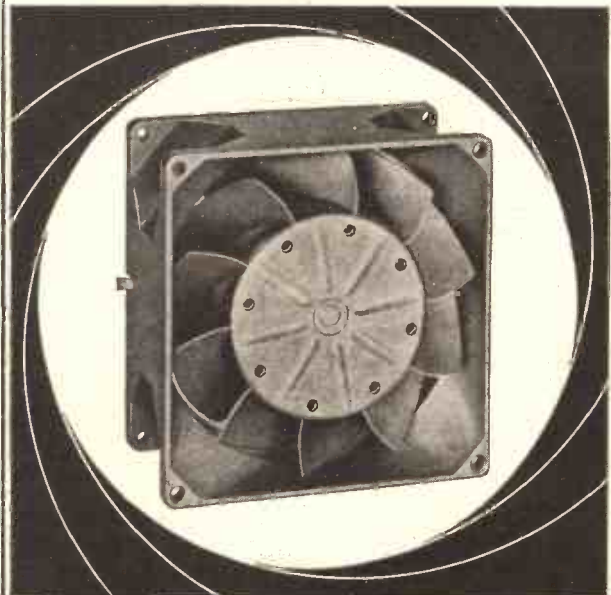

Miniature Axial Fans for high reliability applications. Compact design—great air delivery. Minimum maintenance—maximum reliability. Quiet PAPT-MOTOR (external rotor system).

PAPT-MOTOREN KG. 7742 St. Georgen, W-Germany

1WW-070 FOR FURTHER DETAILS.



# DYNAMIC

# IS THE WORD



Reslo Pencil Dynamic microphones  
give dynamic performance...  
dynamic sound quality

This entirely new Reslo microphone incorporates a miniature dynamic insert and the lightweight cylindrical shell is so designed that its smooth and excellent transient response extends well into the bass region.

These and many other features of the Reslo PD microphone make it eminently suitable for high quality recording and relay purposes. It can confidently be used for high-level realistic close speaking or singing purposes — without additional acoustic filters.



RESLOSOUND LIMITED  
24 UPPER BROOK STREET LONDON W.1  
TELEPHONE HYDE PARK 2291

1WW-071 FOR FURTHER DETAILS.

**ARC**

**D19 CS**


OFF-ON SWITCH  
BASS - ATTENUATION - SWITCH

**£18.10.**

POLITECHNA  
3 PERCY STREET  
LONDON W.1  
LONDON 6736

1WW-072 FOR FURTHER DETAILS.

NOW re-designed  
and fully  
weather protected

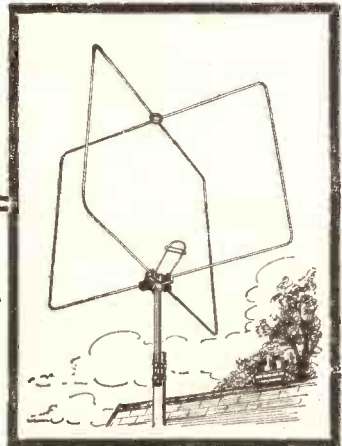

The  
**MINIMITTER  
BIRDCAGE  
F.M. AERIAL**  
Mk. 2

- Suitable for 88-108 Mc/s.
- High Gain (+9.5dB) with high Front to Back (-35dB) and Front to Side (-30dB) ratios.
- Full wavelength elements reduce interference.
- Elimination of vertically polarised signals gives freedom from aeroplane "flutter."
- Tuning facility incorporated to enable the cable to be accurately matched to the aerial.
- Suitable for loft or outside erection.

Retail price **£5** (+ 4/6 post & packing)

**TRADE ENQUIRIES INVITED**

Order direct from

**MINIMITTER (1964) LTD.** Albion Mews, Kilburn  
High Road, London, N.W.6 (Maida Vale 5588)

Manufacturers of Specialist Aerials and Aerial Equipment  
for the Entertainment and Communication Industries.

1WW-073 FOR FURTHER DETAILS.

*Someone - Somewhere  
has never  
heard of*

**HOWELLS  
RADIO**



MINISTRY OF AVIATION APPROVED INSPECTION.

**TRANSFORMERS**

STANDARD RANGE OR TO YOUR DESIGN  
TOROIDAL - 'C' CORE - PULSE - MATRIX

CHASSIS - CABINETS & PRECISION METALWORK  
ELECTRONIC ASSEMBLY

**HOWELLS RADIO LTD.**

MULBERRY STREET, MANCHESTER, 15

MOSS SIDE 2000-2434

1WW-074 FOR FURTHER DETAILS.

# Insulators have a list of satisfied customers as long as your arm...



... and  
keep  
in tune  
with  
Bush

TR114 Transistor Radio Case  
in H.I. Polystyrene for  
Rank Bush Murphy Ltd.

## And what can Insulators mould for you?

With first-class design engineering facilities and three factories specialising in injection, compression and fibreglass mouldings respectively, Insulators are unusually well equipped to tackle any size or shape of problem in plastics. Ask any of the companies listed on this page.

**COMPRESSION • INJECTION • FIBREGLASS MOULDINGS**

## Insulators Limited

Leopold Road, Angel Road, Edmonton, London N.18. (EDMonton 1195-8)  
Grams: Mermould Southtot London.

Send for FREE 16-page booklet which shows exactly why so many of Britain's leading manufacturers come to Insulators for their plastic mouldings.

NAME.....  
COMPANY.....  
ADDRESS.....

W.W.J.

1WV-075 FOR FURTHER DETAILS.

- A.E.I. Hotpoint Ltd.
- Associated Automation Ltd.
- Belling & Co. Ltd.
- Belling & Lee Ltd.
- Champion Sparking Plug Co. Ltd.
- E. K. Cole Ltd.
- Electrolux Ltd.
- Hoover Ltd.
- Magnavox Electronics Co. Ltd.
- M. K. Electric Ltd.
- Morphy-Richards (Astral) Ltd.
- Philips Electrical Ltd.
- P. O. Contracts Dept.
- Satchwell Controls Ltd.
- Simplex Electric Co. Ltd.
- Smith Meters Ltd.

## You'll like the sound of the NEW 668

### it's built for booms

New from Electro-Voice, USA: dynamic cardioid model 668, one of the first microphones designed specially for boom use. Not an improvisation; a specific.

It has a moving coil element, Acoustalloy diaphragm; a versatile filter unit, built direct into the slender body; wide range 'flat' position; variable treble and bass response; instantly adjustable and foolproof; wind shield and shock isolating mount are standard equipment.

Sensitivity at  
250 cps, -51 dB  
250 ohm tap. Ref.  
1mw/10 dyne/cm<sup>2</sup>  
Impedances;  
50, 150 or 250 Ω  
Weight: 1lb 11oz



FULL DETAILS ARE AVAILABLE FROM KEF

**KEF**

KEF ELECTRONICS LTD · TOVIL · MAIDSTONE · KENT · ENGLAND

TELEPHONE: MAIDSTONE 55761. GRAMS: KEF MAIDSTONE

Sole distributors of Electro-Voice equipment in the U.K.

*ElectroVoice*

1W-076 FOR FURTHER DETAILS.

## THE HIGH-FIDELITY MAIL ORDER SPECIALISTS

GOODS DESPATCHED BY RETURN

**Carriage, Packing & Insurance (U.K.) FREE !!**

AMPLIFIERS · TUNERS · SPEAKERS · MOTORS · PICKUPS · MICROPHONES  
CABINETS · TAPE RECORDERS

ACOS A.D.C., ARMSTRONG, B and O, BRENELL, CELESTION, CHAPMAN,  
CONNOISSEUR, DECCA, DULCI, FERROGRAPH, FI-CORD, GARRARD, GOOD-  
MANS, JASON, K.E.F., LEAK, LOWTREE, Lenco, LUSTRAPHONE, PHILIPS,  
PYE, QUAD, RADFORD, RECORD HOUSING, ROGERS, RONETTE, S.M.E.,  
TANNOY, THORENS, TRIVOX, T.S.L., VORTEXION, W.B., WEARITE,  
WHARFEDALE, ETC.

Hire Purchase terms available • "Comparator" Demonstrations

**WORLD WIDE EXPORTERS**

★ OVERSEAS ORDERS SENT FREE OF PURCHASE TAX  
AND SHIPPED PROMPTLY AT MINIMUM COST ★

**C. C. GOODWIN (SALES) LTD.**

(Dept. W60) 7 THE BROADWAY, WOOD GREEN  
LONDON, N.22. Open 9-6  
Thurs. 1 p.m. Tel: BOWes Park 0077/8

**SEMIKRON**

Trade only

HIGH, MEDIUM & LOW POWER · AVALANCHE  
HIGH TENSION · MINIATURE ENCAPSULATED

**SILICON RECTIFIERS**

MINIATURE & STACK

**SELENIUM RECTIFIERS**

Send for full details to sole representative in U.K.

**HCD Research Ltd.,** Laboratories and  
Works.

77, Gloucester Road, Croydon, Surrey  
Telephone: THOrnton Heath 7485



1W-077 FOR FURTHER DETAILS.

## AUDIO AMPLIFIER

12 Volt with 15 W. Output

*Designed specially to give pleasing results on music and speech*

Common emitter, class B output stages, with maximum efficiency choke coupling to 15 ohm speaker lines; temperature stabilised and direct coupled pre-amplifier stages with liberal feedback.

All output and input terminations are fully floating, thus enabling layman or skilled engineer to be equally confident in the simple matter of coupling up for use.

FULL DETAILS OF THIS AND OTHER EQUIPMENT BY RETURN OF POST

**E. K. ELECTRONICS, (I.A.) LTD: Brotherton, Knottingley, Yorks.**

1W-078 FOR FURTHER DETAILS.



# HUNTING FOR COMPONENTS? . . .

## ASK PALMER'S FIRST!


PALMER DATA REFERENCE SHEET FOR



CAPACITORS


A range of paper and plastic film and electrolytic capacitors. Conforming to JAN-MIL & J.E.C. specifications.

### EROFOL II Type HX Polyester Capacitors

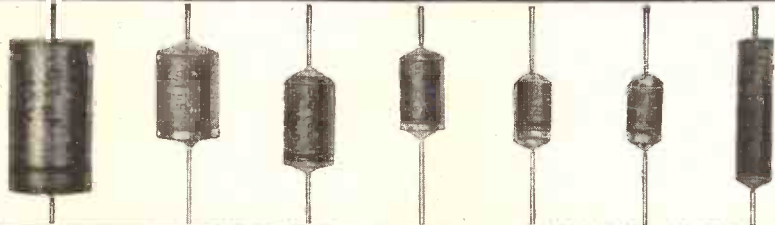

Tolerance	from 5% to 10%
Range of Values	from 33pF to 0.47 $\mu$ F
Voltage Range	from 100V to 1000V

### EROMAK I (Type Hf) Polycarbonate Capacitors



Range of Values	100pF to 1.0 $\mu$ F
Tolerance	from 1% to 20%
Voltage Range	from 63V to 400V

### Paper Capacitors

Tubular & Rectangular Can Styles




Range of Values	from 47pF to 10 $\mu$ F
Tolerance	20%
Voltage Range	from 250V to 16kV

Multiple types also available

### ROE Electrolytic Capacitors

Subminiature, miniature & standard types

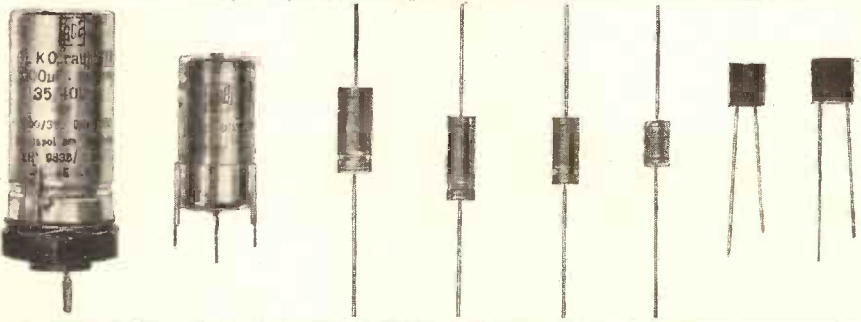

Range of Values	from 0.1 $\mu$ F to 25000 $\mu$ F
Voltage Range	from 3V to 450V

Multiple types and special mountings available

For further details concerning ranges and specifications of ERO capacitors write to:

## G. A. STANLEY PALMER LTD

Island Farm Avenue, West Molesey Trading Estate,  
East Molesey, Surrey.

M & P SFE 6

## THE WHARFEDALE Super Range

Each loudspeaker in this range is fitted with roll surround for low resonance and double diaphragm assembly for extended HF response.


### SUPER 8/RS/DD

Impedance 10/15 ohms  
CERAMIC MAGNET  
Flux density 14,500 oersteds  
Total flux 60,000 maxwells  
Aluminium voice coil.  
Max. input 6 watts rms or 12 watts peak  
Frequency range 40-20,000 c/s.  
Bass resonance 50/60 c/s.  
Price 134/2 inc. P.T.



### SUPER 10/RS/DD

Impedance 10/15 ohms  
Flux density 16,000 oersteds  
Max. input 10 watts rms or 20 watts peak  
Frequency range 30-20,000 c/s.  
Aluminium voice coil  
Bass resonance 38/43 c/s.  
Price 218/8 inc. P.T.



### SUPER 12/RS/DD

Impedance 12/15 ohms  
Flux density 17,000 oersteds  
Total flux 190,000 maxwells  
Aluminium voice coil  
Max. input 20 watts rms or 40 watts peak  
Frequency range 25-20,000 c/s.  
Bass resonance 26/32 c/s.  
Price 350/- (no tax)



Write for informative and fully illustrated 12 page booklet.



Wharfedale Wireless Works Ltd., Idle, Bradford, Yorks.  
Telephone: Idle 1235/6      Telegrams: 'Wharfedel' Bradford.

1W W-080 FOR FURTHER DETAILS.

MANUFACTURERS OF MACHINES FOR

## AUTOMATIC & HAND COIL WINDING, LAYER, WAVE AND CONTINUOUS STRIP WINDING

REEL CARRIERS (Light & Heavy)

Machines supplied to customers' requirements.

Your enquiries are invited

## ETA TOOL CO.

(LEICESTER) LTD.

29A WELFORD ROAD, LEICESTER

Phone 56386

1W W-081 FOR FURTHER DETAILS.

## TRANSVERTERS

(TRANSISTORISED D.C. CONVERTERS)


2 KW. Peak Starting. 650 W. Continuous. 50-60-400 c/s. or D.C. from 12-24-50 v. Battery. Up to 93% Efficiency. Polarity Reversal Protection. Square or Sinewave. Up to 300% Instant Overload Capacity. Manually Controlled Frequency. Reed Type Indicator. Remote Control Facilities.

**Applications:** Static "No-Break" Standby Power Supplies; For Vital System(s) Protection, e.g. V.H.F. Transmitters; Industrial Processes; Control-Alarm-Warning Systems; Mobile Use of Counters; Sig./Gen. Recorders—U/V Sound. Oscilloscopes and Lab. Gear in Marine and Aircraft (K114).

Range of models available with prices from £11-£90.

Please write to department C.10 for transverter leaflet.

**Valradio** LIMITED



the D.C. conversion specialists since 1935


BROWELLS LANE . FELTHAM . MIDDLESEX  
Telephone: FELTHAM 4837

Valradio and Stereosonoscope are the registered trade marks of Valradio Ltd.

1W W-082 FOR FURTHER DETAILS.



# PRECISION PRESSINGS

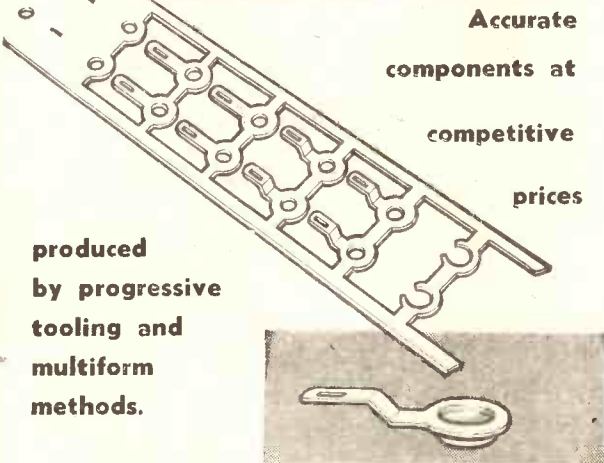

Accurate  
components at  
competitive  
prices

produced  
by progressive  
tooling and  
multiform  
methods.

## JOHN SMITH LTD.

209 SPON LANE · WEST BROMWICH · STAFFS. TELEPHONE WES 2516  
"MITRE MILLS" RICHARD STREET · BIRMINGHAM 7  
TELEPHONE ASTon Cross 2218 (4 lines)  
1W W—083 FOR FURTHER DETAILS.

NUMBER ONE IN ELECTRICAL CONNECTORS...



## UHF-COAXIAL/TWINAXIAL

General Purpose Coax/Twinax. Six basic shell styles. Up to 500V Peak.

### CANNON ELECTRIC (GREAT BRITAIN) LTD.

25-27 Bickerton Road,  
Upper Holloway, London, N.19.  
Telephone: ARChway 3088



1W W—084 FOR FURTHER DETAILS.

# AIREDALE FREE STANDING SPEAKER ASSEMBLY



the finest  
mobile speaker  
ever  
to be produced  
by WHARFEDALE

For many years the Wharfedale omni-directional 3-speaker Corner System has been recognised as a superbly natural reproducer, and has frequently stood the difficult test of comparison with live musical performances. The AIREDALE is a free-standing version, suitable for corner or along the wall location. Cabinet resonance is avoided by sand filling the front panel and fitting ceramic tiles to rear side panels. Some idea of the solid construction is given by the fact that the total weight exceeds  $\frac{1}{2}$  cwt. Fitted with castors for ease of movement.

### SPECIFICATION :

SIZE: 39 × 28 $\frac{1}{2}$  × 14in.

WEIGHT: 91 lb. complete.

IMPEDANCE: 12-15 ohms only.

MAX. INPUT: 20 watts.

Individual controls for middle and treble response are located in the rear panel.

£65.00 full finished with a choice of polished walnut or mahogany veneers or oiled teak.


Oak finish available to special order.

£64.00 unpolished.

Fully descriptive literature free on request.

### In the Airedale

L.F. output is produced by a 15" unit, type W15/RS, fitted with heavy cone and impregnated cloth roll surround for minimum distortion.



WHARFEDALE WIRELESS WORKS LTD. Idle, Bradford, Yorks.  
Telephone: Idle 1235/6 Telegrams 'Wharfdel' Bradford

1W W—085 FOR FURTHER DETAILS.

# FREE TO AMBITIOUS ENGINEERS

— THE LATEST EDITION OF ENGINEERING OPPORTUNITIES

## Have you sent for your copy?

ENGINEERING OPPORTUNITIES is a highly informative 156-page guide to the best paid engineering posts. It tells you how you can quickly prepare at home for a recognised engineering qualification and outlines a wonderful range of modern Home Study Courses in all branches of Engineering. This unique book also gives full details of the Practical Radio & Electronics Courses, administered by our Specialist Electronics Training Division—the B.I.E.T. School of Electronics, explains the benefits of our Employment Dept. and shows you how to qualify for five years promotion in one year.

## We definitely Guarantee "NO PASS — NO FEE"

Whatever your age or experience, you cannot afford to miss reading this famous book. If you are earning less than £25 a week, send for your copy of "ENGINEERING OPPORTUNITIES" today—FREE.

**BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY**  
(Dept. SE/22 ), 29 Wright's Lane, London, W.8

**THE B.I.E.T. IS THE LEADING ORGANISATION OF ITS KIND IN THE WORLD**

### WHICH IS YOUR PET SUBJECT ?

Mechanical Eng.,  
Electrical Eng.,  
Civil Engineering,  
Radio Engineering,  
Automobile Eng.,  
Aeronautical Eng.,  
Production Eng.,  
Building, Plastics,  
Draughtsmanship,  
Television, etc.

### GET SOME LETTERS AFTER YOUR NAME!

A.M.I.Mech.E.  
A.M.I.C.E.  
A.M.I.Prod.E.  
A.M.I.M.I.  
A.I.O.B.  
B.Sc.  
A.M.I.E.P.E.  
City & Guilds  
Gen. Cert. of Education  
Etc., etc.

### PRACTICAL EQUIPMENT

Basic Practical and Theoretic Courses for beginners in Radio, T.V., Electronics, Etc., F.M., F.P.E. City & Guilds Radio Amateurs' Exam. R.T.E.B. Certificate P.M.G. Certificate Practical Radio Radio & Television Servicing Practical Electronics Electronics Engineering Automation

### INCLUDING TOOLS!

The specialist Electronics Division of B.I.E.T. NOW offers you a real laboratory training at home with practical equipment. Ask for details.

### B.I.E.T. SCHOOL OF ELECTRONICS



### POST COUPON NOW!

Please send me your FREE 156-page "ENGINEERING OPPORTUNITIES" (Write if you prefer not to cut page)

NAME .....

ADDRESS .....

SUBJECT OR EXAM THAT INTERESTS ME .....

1W-086 FOR FURTHER DETAILS.

## TELEPRINTERS-PERFORATORS REPERFORATORS-TAPER READERS

Codes: Int. No.2; Ferranti/Pegasus, Elliott 803 etc.

**2 AND 5 WIRE, F.S.K. TERMINALS, POWER SAMAS, FLEXO WRITER AND BURROUGHS EQUIPMENT**

TELEGRAPH AUTOMATION AND COMPUTER ACCESSORIES

Picture Telegraph Equipment, Desk-Fax, Morse Equipment, Cold Cathode Matrices, Stroboscope and Electronic Forks, Pen Recorders, Switchboards, Rectifiers, Tape Pullers and Rewinders, Governed, Synchronous and Phonic Motors, Suppressors, Teleprinter and Teletype Tables, Silence Covers, Terminals, V.F. and F.M. Equipment, Telephone Carriers and Repeaters, Multiplex Transmitters, Triple Stabilised Power Units, Send/Receive Low and High Pass Filters, Teleprinter and Relay Testers, Oscilloscopes, Valve Testers, Electric Meters, Teleprinter and Teledeltos Paper, Plugs, Sockets, Key, Push, Miniature and other Switches, Cord Wires and Cables, Relays and Relay Bases, Uniselectors, Telephone, Decimal and other Counters, Telegraph and Mains Transformers, Racks and Consoles, Miscellaneous Accessories.

**BATEY & COMPANY**  
Gaiety Works, Akeman Street, Tring, Herts.  
Tel.: Tring 3476 (3 Lines) Cables: RAHNO TRING

1W-087 FOR FURTHER DETAILS.

## DON'T MISS THIS NEW MAGAZINE



A bi-monthly publication for the professional, amateur and enthusiast in radio systems

Annual subscription 18/6 post free


Order now direct from:—

**R.C.S. ELECTRONICS**  
NATIONAL WORKS, BATH ROAD, HOUNSLOW, MIDDX

1W-088 FOR FURTHER DETAILS.



# Ferroglyph

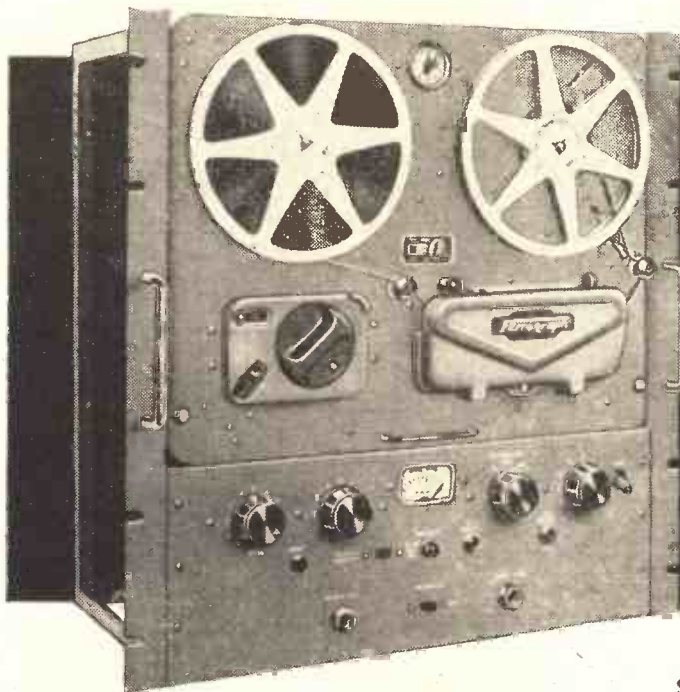

## SERIES Y RECORDERS

Series "Y" instruments are housed in strong metal cases and, in some instances, can be rack-mounted. They are intended for those engaged in scientific research and industrial pursuits.

### YD5 SINGLE CHANNEL RECORDERS

Model	Tape Speeds	Voltage	Frequency
YD5A	7½, 3¾ and 1¾ i.p.s.	100/250V	50 c.p.s.*
YD5AH	15 and 7½ i.p.s.	100/250V	50 c.p.s.*
YD5B	7½, 3¾ and 1¾ i.p.s.	100/250V	50 c.p.s.*
YD5BH	15 and 7½ i.p.s.	100/250V	50 c.p.s.*

\*60 c.p.s. to order

### Y500 DOUBLE CHANNEL RECORDERS

Model	Tape Speeds	Voltage	Frequency
Y532U	7½, 3¾ and 1¾ i.p.s.	200/250V	50 c.p.s.
Y532A	7½, 3¾ and 1¾ i.p.s.	117V	60 c.p.s.
Y532E	7½, 3¾ and 1¾ i.p.s.	110V	50 c.p.s.
Y522UH	15 and 7½ i.p.s.	200/250V	50 c.p.s.
Y522HA	15 and 7½ i.p.s.	117V	60 c.p.s.
Y522HE	15 and 7½ i.p.s.	110V	50 c.p.s.



Send for details to:

**THE FERROGRAPH COMPANY LTD**

84 BLACKFRIARS ROAD, LONDON, S.E.1

Telephone: WATERloo 1981

SOUND



# REPRODUCTION

A brilliant new range  
of small speakers by R & A  
3 $\frac{3}{8}$ in. round  
6 x 4in. and 8 x 5in. elliptical  
5in. pincushion.  
And a new range of  
8-12in. units giving  
higher fidelity at little  
more than standard prices.



LOUD SPEAKER MANUFACTURERS TO THE RADIO INDUSTRY SINCE 1930

**REPRODUCERS AND AMPLIFIERS LTD.**  
WOLVERHAMPTON, ENGLAND.

1WW—090 FOR FURTHER DETAILS.



**NEW DIGITEC!**  
a full performance Digital Voltmeter  
for under £150

Accuracy:	0.1% or 0.2%
Ranges:	1, 10, 100, 1,000V d.c.
Input Impedance:	2.2 megohms
Size:	5 $\frac{1}{2}$ " x 8" x 7"

Please send me further details of Digitec

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

**WAYNE KERR** The Wayne Kerr Laboratories Limited,  
Coombe Road, New Malden, Surrey. MALden 2202.

1WW—091 FOR FURTHER DETAILS.

WKD54a

## TRANSFORMERS COILS CHOKES

LARGE OR SMALL QUANTITIES  
TRADE ENQUIRIES WELCOMED

SPECIALISTS IN

### FINE WIRE WINDINGS


MINIATURE TRANSFORMERS  
RELAY AND INSTRUMENT COILS, ETC.  
VACUUM IMPREGNATION TO APPROVED STANDARDS

### ELECTRO-WINDS LTD.

CONTRACTORS TO G.P.O., A.W.R.E., L.E.B., B.B.C., ETC.  
123-5-7 PARCHMORE ROAD, THORNTON HEATH, SURREY  
LIVINGSTONE 2261 EST. 1933

1WW—092 FOR FURTHER DETAILS.

## A.C. SOLENOID type SAM/T



Now fitted with stainless  
steel guides—six times the  
life.

Continuous 14 oz. at  $\frac{3}{8}$ in.  
Instantaneous to 5 $\frac{1}{2}$ lb.

Larger and smaller sizes  
available.


Also Transformers to 7  
kVA 3 phase.

## R. A. WEBBER LTD.

KNAPPS LANE, CLAY HILL, BRISTOL 5. Phone: 65-7228/9

1WW—093 FOR FURTHER DETAILS.

# BRIMAR 6BS7

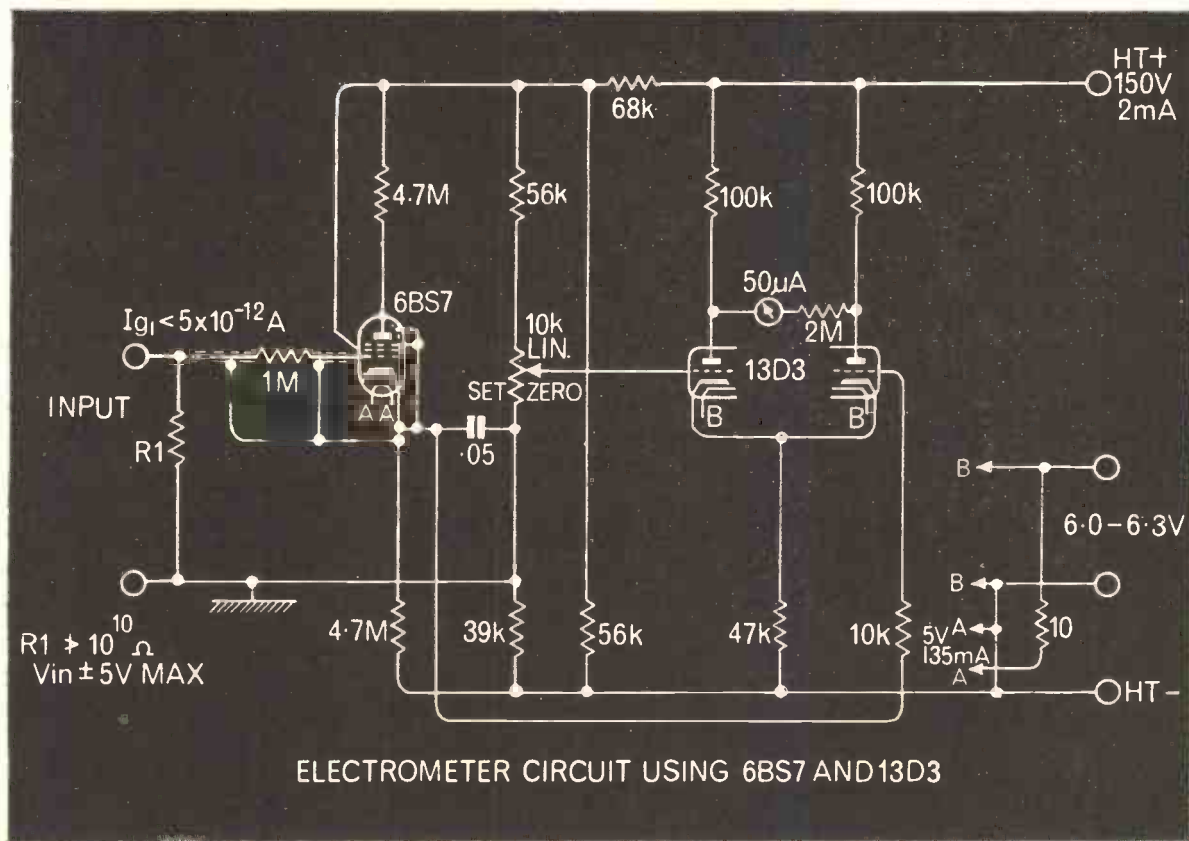

## electrometer pentode



The BRIMAR 6BS7 screened pentode is ideal for electrometer use, or for other special applications, including very high gain audio input circuits, where its characteristics of low noise, microphony and hum are necessary. Shown above is a typical electrometer circuit using types 6BS7 and 13D3. Please ask for Data Sheets

- Low microphony
- Low noise
- Low hum
- Top cap control grid
- Grid sensitivity  $10\mu\text{V}$
- Grid current  $< 5\mu\text{A}$

**Thorn-AEI Radio Valves & Tubes Ltd.**

155 CHARING CROSS ROAD · LONDON WC2 · GERtard 9797

# THERMETTE

## 9-Pin Miniature THERMAL TIME DELAY RELAY

The Thermette Time Delay Relay by G-V is especially designed for commercial and industrial applications requiring reliable operation and long life at MINIMUM COST. The compensated bi-metal relay mechanism, completely enclosed in a shatterproof dust-tight metal shell, provides a degree of dependability and long life previously unavailable in the lower price range. This relay offers true economy through its low initial cost and dependability over a long service life. The Thermette may be used interchangeably with all other standard 9-pin single-pole single-throw thermal time delay relays.

- CONTACTS:** SPST normally open or normally closed.  
Rated at 2 amps. 115 volts AC or 1 amp.  
28 volts DC resistive
- HEATER POWER:** 2½ watts nominal
- TIME DELAYS:** From 5 to 90 seconds
- TIME DELAY**
- TOLERANCE:** ±20%
- WEIGHT:** Less than ½ ounce

The Thermette may be energized continuously at rated voltage in ambient temperatures up to 80°C.

TELEPHONE  
COVENTRY  
72055

**COVENTRY CONTROLS LIMITED**  
GODIVA HOUSE, ALLESLEY OLD ROAD, COVENTRY



A.I.D. AND A.R.B. APPROVED

1W-095 FOR FURTHER DETAILS.

## LEARN ELECTRONICS AS YOU

# BUILD 25

including: **CIRCUITS  
EXPERIMENTS  
TEST GEAR**

- MINIATURE CATHODE RAY OSCILLOSCOPE
- VALVE EXPERIMENTS
- BASIC AMPLIFIER
- BASIC RECTIFIER
- PHOTO ELECTRIC CIRCUIT
- TIME DELAY CIRCUIT
- SQUARE WAVE GENERATOR
- SIMPLE TRANSMITTER
- TRANSISTOR EXPERIMENTS
- BASIC OSCILLATOR
- ELECTRONIC SWITCH
- SIGNAL TRACER
- BASIC COMPUTER CIRCUIT
- BASIC RADIO RECEIVER
- MORSE CODE OSCILLATOR, ETC., ETC.

This complete practical course will teach you all the basic facts of electronics by making experiments and building apparatus. You learn how to recognise and handle all types of components—their symbols and how to read a circuit diagram. You see how circuits are built and how they work BY USING THE OSCILLOSCOPE PROVIDED. Applications of all the main electronic circuits are demonstrated—radio reception and transmission; photo-electrics; computer basics; timers; control circuits; etc., including servicing techniques. NO MATHS USED OR NEEDED. NO THEORY NEEDED. NO PREVIOUS KNOWLEDGE OR EXPERIENCE NEEDED. Tutor service available. No extras needed—tools provided. Send, now, for FREE DETAILS without obligation, to address below.

To: **RADIOSTRUCTOR, Dept. K1, Reading, Berks.**

Please send free details of your 25 circuit kit course—

NAME.....

ADDRESS.....

1W-096 FOR FURTHER DETAILS.

## LARGE REDUCTIONS IN PRICES OF COMPONENTS FOR OLDER MODELS

... VAST SELECTION OF  
TV REPLACEMENT  
COMPONENTS  
FOR ALL MODELS!



ALWAYS OBTAINABLE FROM STOCK: Time Base Components, 405/625 & 625 line Line Output Transformers, Chemicals for Servicing, Capacitors, Resistors, Rectifiers, Test Equipment, etc., etc. Retail enquiries S.A.E., Trade enquiries on headed paper.

Order on  
SAME DAY SERVICE


from

direct TV **Replacements LTD.**

Dept. WW, 126 Hamilton Rd., West Norwood, London, S.E.27.  
Telephone: GIPsy Hill 6166 (PBX)

1W-097 FOR FURTHER DETAILS.


# IS TELEVISION YOUR BUSINESS?

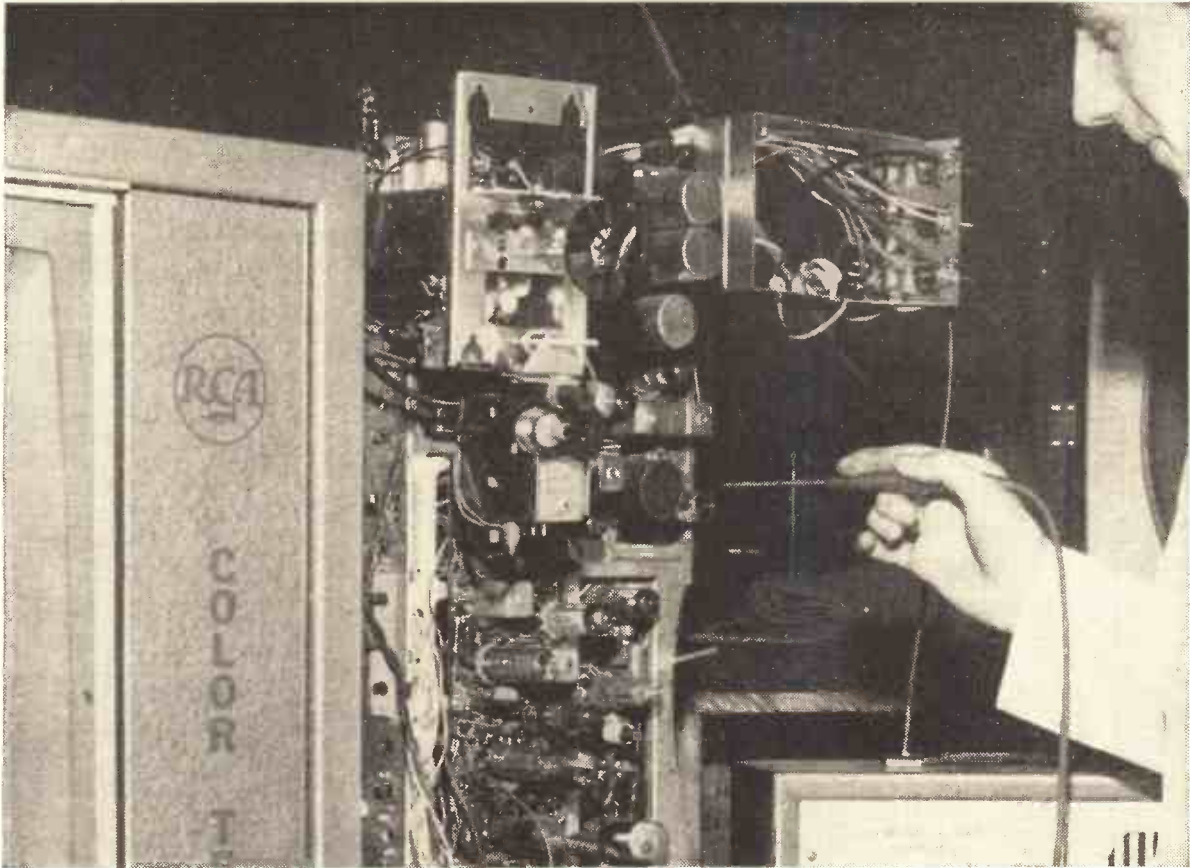

*offer you a unique chance to learn about colour television*

Colour television is just around the corner. Over the next decade or so it will come to represent the main source of income to all in the television business. For those engineers and technicians who can work with colour equipment this decade is going to be an opportunity paralleled only by the coming of monochrome television. Do you yet know enough about colour television to take this great opportunity when it comes?

Here is a unique chance to learn about colour television. From RCA, who have more experience of colour television than any other company in the world, comes a concise, comprehensive, four volume home study course. The first such course available in Britain. Direct from the RCA Institute in New York, this course covers every aspect of colour television, both theory and practice

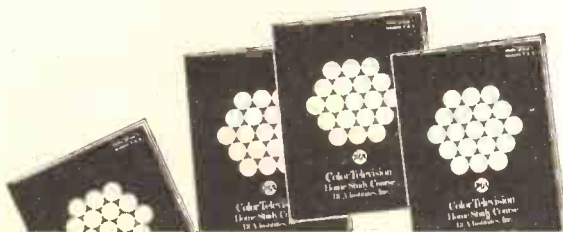

If you would like to know more about RCA's home-study courses in colour television please complete this coupon and post it to the address below.

NAME .....

ADDRESS .....

**RCA GREAT BRITAIN LIMITED**  
*A subsidiary of Radio Corporation of America*  
 RCA VICTOR DIVISION, LINCOLN WAY, WINDMILL ROAD,  
 SUNBURY-ON-THAMES, MIDD. SUNBURY-ON-THAMES 5511

1WV-098 FOR FURTHER DETAILS.

# EXCEL in ELECTRONICS

## Through this ICS 3-way Training Method:

### MASTER THE THEORETICAL SIDE

**1** From basic principles to advanced applications, you'll learn the theory of electronic engineering, quickly and easily through ICS. That's because each course is set out in easy-to-understand terms.

### MASTER THE PRACTICAL SIDE

**2** ICS show you how to develop your practical abilities in electronic engineering—*alongside* your theoretical studies. It's the only sure way to success. All training manuals are packed with easy-to-follow illustrations.

### MASTER THE MATHEMATICAL SIDE

**3** To many this aspect is a bitter problem. Even more so because no electronic engineer is complete without a sound working knowledge of maths. But new ICS teaching makes mathematics easier to learn.

Wide range of courses available including :

Radio/T.V. Engineering and Servicing, Colour Television, Electronics, Electronic Maintenance, Instrumentation and Servomechanisms, Telemetry, Computers, etc.  
NEW! Programmed Course on Electronic Fundamentals.

#### EXPERT COACHING FOR:

- INSTITUTION OF ELECTRONIC & RADIO ENGINEERS
- CITY & GUILDS TELECOMMUNICATION TECHNICIANS
- CITY & GUILDS SUPPLEMENTARY STUDIES
- R.T.E.B. RADIO/T.V. SERVICING CERTIFICATE
- RADIO AMATEURS' EXAMINATION
- P.M.G. CERTIFICATES IN RADIOTELEGRAPHY

And there are practical "learn as you build" radio courses as well.

Member of the Association of British Correspondence Colleges.

FOR **FREE** HANDBOOK POST THIS COUPON TODAY

I.C.S., Dept. 227, INTERTEXT HOUSE,  
PARKGATE ROAD, LONDON, S.W.11


NAME .....

ADDRESS .....

OCCUPATION..... AGE.....165

**INTERNATIONAL CORRESPONDENCE SCHOOLS**

1W W—099 FOR FURTHER DETAILS.

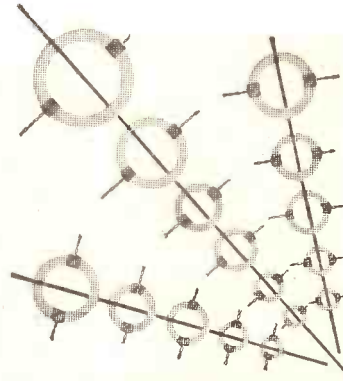

## NEWPORT INSTRUMENTS wind YOUR cores faster— at less cost!


Save yourself time and money: let Newport Instruments take the job of ferrite-winding off your hands. Our large, modern factory is geared for fast, efficient winding of every type of core—to your own design or ours—large quantity or small. Let us give you a quotation. We think you'll be impressed.



NEWPORT INSTRUMENTS (Scientific & Mobile) Ltd  
NEWPORT PAGNELL, BUCKS. Tel: 401/2

1W W—100 FOR FURTHER DETAILS.

# a Whole World of users can't be wrong!

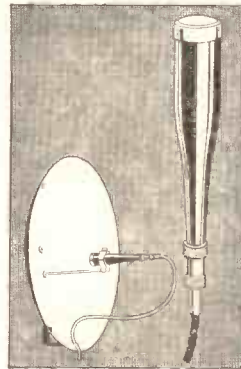

One of the really outstanding microphones in the medium-price range, the DP/4 is enjoying unparalleled success. Small wonder, for the DP/4 is wonderfully reliable and sensitive to an extremely wide range of sounds. Uniform frequency response from 50 c/s to 15 Kc/s.


It is in world-wide use for high-quality broadcasting, recording and public address both by the amateur and professional. The Parabolic Reflector, its natural partner, focuses a distant sound-source onto the microphone head, greatly amplifying it without loss of realism and without unwanted side-noises. Low impedance microphone, complete with connector and 18ft. screened lead £8. Medium and high impedance models £9. Parabolic Reflector 2ft. dia. complete with microphone holder £6/5/-.

Further details from your dealer or from:—  
**GRAMPIAN REPRODUCERS LTD.,**  
Hanworth Trading Estate,  
Feltham, Middx. FELtham 2557



Sound Equipment—  
Integrity that you hear

1W W—101 FOR FURTHER DETAILS.

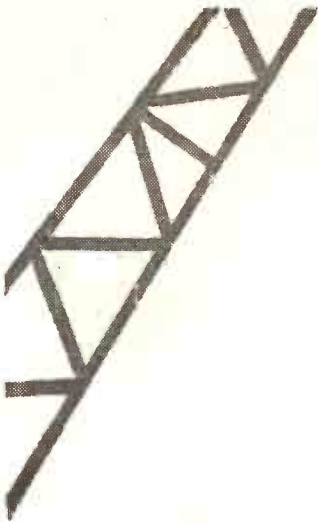


Again we take the opportunity of thanking our world-wide clientele for their support in 1964, which again proved to be another year of record sales and we hope first class service which we intend to continue in 1965.



Your specific enquiries for special types to CV. JAN and MIL specifications are invited.

Our organisation is Ministry of Aviation approved

Air Registration Board approved



## HALL ELECTRIC LTD

### HALTRON HOUSE, ANGLERS LANE, LONDON N.W.5.


Tel.: Gulliver 8531 (10 lines) Telex 2-2573 Cables: "Hallelectric London"




1WW-102 FOR FURTHER DETAILS.

# Bullers CERAMICS

for the **ELECTRONIC INDUSTRY**  
(and Electrical Appliance Manufacture)

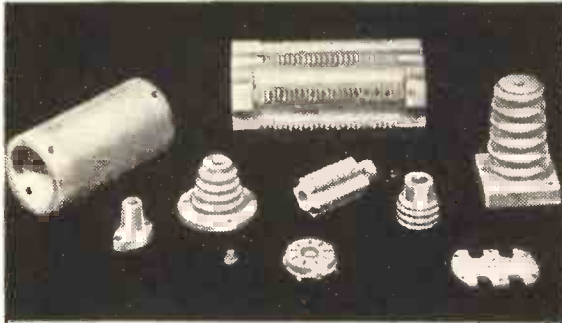

Frequelex—for high-frequency insulation.

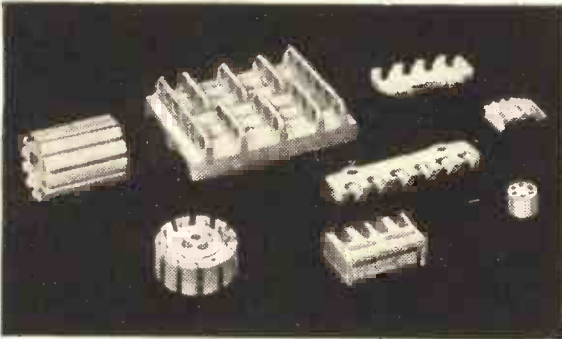

Refractories for high-temperature insulation.



Bullers porcelain for general insulation purposes.

Meticulous care in manufacture, high quality material, with particular attention applied to *dimensional precision and accuracy*, explain the efficiency and ease of assembly when using Bullers die pressed products. *Write today for detailed particulars.*

## BULLERS LIMITED

Milton, Stoke-on-Trent, Staffs.

Phone: Stoke-on-Trent 54321 (5 lines)

Telegrams & Cables: Bullers, Stoke-on-Trent  
London Office: 6 Laurence Pountney Hill, E.C.4  
Phone: MANsion House 9971

1W W—103 FOR FURTHER DETAILS.

# FREE!




## A FEELING OF SATISFACTION

with every

*Partridge*

HI FI

## TRANSFORMER



For over 30 years Partridge Transformers have made available to enthusiasts (and to equipment manufacturers) a range of High Fidelity Transformers designed and built to exceptional standards of performance. Get the best out of your equipment with Partridge—the finest transformers money can buy. Write for full information and data sheets on the High Fidelity Range.

**PARTRIDGE TRANSFORMERS LTD.**

ROEBUCK ROAD, GHESSINGTON, SURREY

Telephone: LOWer Hook 4353/4/5



1W W—104 FOR FURTHER DETAILS.

## TECHNICAL TRAINING by **ICS** IN RADIO, TELEVISION AND ELECTRONIC ENGINEERING

First-class opportunities in Radio and Electronics await the ICS trained man. Let ICS train YOU for a well-paid post in this expanding field.

ICS courses offer the keen, ambitious man the opportunity to acquire, quickly and easily, the specialized training so essential to success. Diploma courses in Radio/TV Engineering and Servicing, Electronics, Computers, etc. Expert coaching for:

- INSTITUTION OF ELECTRONIC AND RADIO ENGINEERS.
- C. & G. TELECOMMUNICATION TECHNICIANS' CERTS.
- C. & G. SUPPLEMENTARY STUDIES.
- R.T.E.B. RADIO AND TV SERVICING CERTIFICATE.
- RADIO AMATEURS' EXAMINATION.
- P.M.G. CERTIFICATES IN RADIOTELEGRAPHY.

Examination Students Coached until Successful.

**NEW SELF-BUILD RADIO COURSES.**

Build your own 5-valve receiver, transistor portable, signal generator and multi-test meter—all under expert tuition.

POST THIS COUPON TODAY and find out how ICS can help YOU in your career. Full details of ICS courses in Radio, Television and Electronics will be sent to you by return mail.

MEMBER OF THE ASSOCIATION OF BRITISH CORRESPONDENCE COLLEGES.

**INTERNATIONAL  
CORRESPONDENCE  
SCHOOLS**

International Correspondence Schools  
(Dept. 222), Intertext House, Parkgate  
Road, London, S.W.11.

NAME .....

ADDRESS .....

Block Capitals Please

**A WHOLE WORLD  
OF KNOWLEDGE  
AWAITS YOU!**

1-65

1W W—105 FOR FURTHER DETAILS.





# NEW REGAVOLT MODEL 31A

The smallest variable transformer made in the World for 0-250v service

Nearly 30 years experience lies behind this single layer toroid capable of direct connection to a 250v A.C. supply to give reliability for industrial service.

Only 3" in diameter and 2" deep this Regavolt can control loads of up to 1 amp when heat sink mounted.

\* RATED UP TO 1 AMP \* TROUBLE-FREE BRUSH GEAR \* OTHER MODELS FOR 120 AND 230V INPUTS AVAILABLE \* NOW IN FULL PRODUCTION Please write for List MT/625D for full details

The British Electric Resistance Co. Ltd.



Queensway · Enfield  
Middlesex Tel: HOW 2411  
Grams: Vitrohm Enfield

1W-106 FOR FURTHER DETAILS.

# CHASSIS and CASES

by *Smith's* of EDGWARE ROAD

ELECTRONIC COMPONENT DISTRIBUTORS

287/289 EDGWARE ROAD, LONDON, W.2.  
Tel: PADDINGTON 5891/7595

We shall be pleased to quote for all your component requirements

## BLANK CHASSIS

SAME DAY SERVICE

Of over 20 different forms made up to YOUR SIZE. Order EXACT SIZE you require to nearest 1/16th. (Maximum length 35in., depth 4in.) Specials dealt with promptly.

SEND FOR ILLUSTRATED LEAFLETS


or order straight away, working out total area of material required and referring to table below which is for four-sided chassis in 18 s.w.g. (for 16 s.w.g. add 1/16th).

48 sq. in. 4/-	176 sq. in. 8/-	304 sq. in. 12/-
80 sq. in. 5/-	208 sq. in. 9/-	336 sq. in. 13/-
112 sq. in. 6/-	240 sq. in. 10/-	368 sq. in. 14/-
144 sq. in. 7/-	272 sq. in. 11/-	and pro rata.

P. & P. 2/6 P. & P. 2/9 P. & P. 3/-  
Discounts for quantities. Finishes arranged for quantities of 25 or over.

FLANGES (1/2in., 3/8in.), 6d. per bend.  
STRENGTHENED CORNERS 1/- each corner.

PANELS: Any size up to 3ft. at 4/6 sq. ft. 18 s.w.g.; (16 s.w.g. 5/3). Plus post and packing (over £2 free).

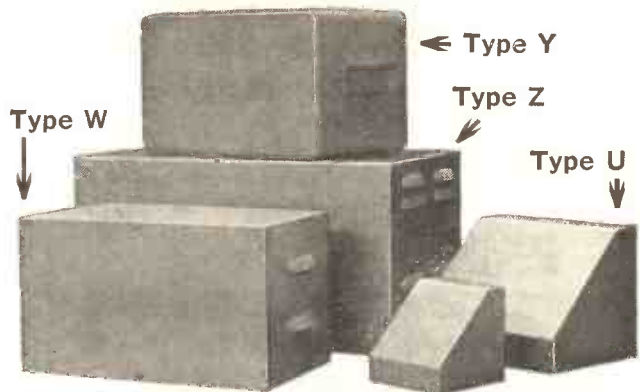

## CASES

ALUMINIUM SILVER HAMMERED FINISH


Type	Size	Price	Type	Size	Price
U	4 x 4 x 4*	9/6	Y	8 x 6 x 6*	25/-
U	5 1/2 x 4 1/2 x 4 1/2	14/6	Y	12 x 7 x 7	39/-
U	8 x 6 x 6	20/-	Y	13 x 7 x 9	44/-
U	15 x 9 x 9	42/6	Y	15 x 9 x 7	46/-
W	8 x 6 x 6	19/6	Z	17 x 10 x 9	63/-
W	12 x 7 x 7	32/6	Z	19 x 10 x 8 1/2	67/6
W	15 x 9 x 8	42/-		*Height.	

Plus post and packing (over £2 free).

Type U has removable bottom or back. Type W removable front, Type Y all-screwed construction, Type Z removable back and front.

1W-107 FOR FURTHER DETAILS.

GET A GOOD LOOK AT WORLD ELECTRONICS IN 1965

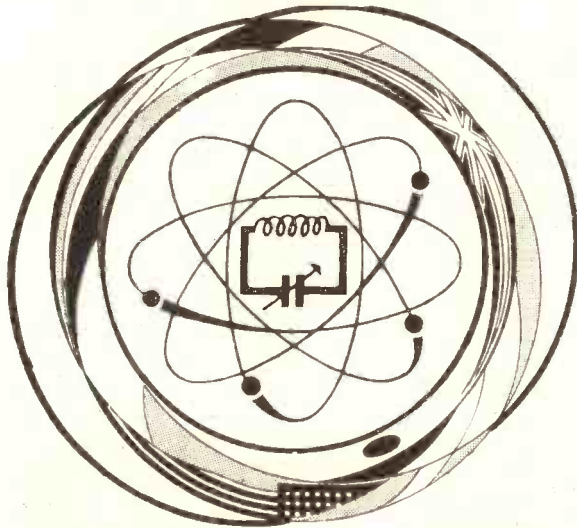


at the INTERNATIONAL EXHIBITION OF  
**ELECTRONIC COMPONENTS**  
 and at the INTERNATIONAL EXHIBITION OF  
**AUDIO EQUIPMENT**

PARIS Porte de Versailles  
 8th - 13th April 1965

the world's biggest display in the field of electronics

All components, tubes, semi-conductors, measurement and control instruments, electroacoustics

For all information apply to:  
 S.D.S.A. 16, rue de Presies  
 Paris 15e—Telephone 273.24.70



Under the patronage of the F.N.I.E.  
**INTERNATIONAL SYMPOSIUM  
 ON TECHNIQUES  
 OF MEMORIES**

organised by the Société Française des Electroniciens et Radioélectriciens

MAISON DE L'UNESCO, PARIS  
 125, avenue de Suffren  
 5th-10th April 1965

PUBLISHERS  
 SERVICE

1WW-108 FOR FURTHER DETAILS.

OVER

**2,000 COMBINATIONS  
 "LAB-AIDS" TEST LEADS.**

- Heavy duty P.V.C. cables - eleven distinguishing colours.
- Solderless crimped terminals.
- Nickel-plated crocodile clips with axial riveted jaws.
- Lead lengths 3, 6, 12, 18, 24 and 36 inches.
- Alternative clips, plugs and spades.
- Individually tested and sealed in plastic bags.
- Comprehensive kits - include support racks.

Special leads produced to order.

"LAB-AIDS" DIVISION,  
**AVON COMMUNICATIONS & ELECTRONICS LIMITED,**  
 14-16a, HIGH ST., CHRISTCHURCH : 2469 HAMPSHIRE

1WW-109 FOR FURTHER DETAILS.

**YOUR CAREER IN RADIO?**


Big opportunities and big money await the qualified man in every field of Electronics today—both in the U.K. and throughout the world. We offer the finest home study training for all subjects in radio, television, etc., especially for the **CITY & GUILDS EXAMS.** (Technicians' Certificates); the Grad. Brit. I.R.E. Exam.; the Radio **Amateur's Licence**; P.M.G. Certificates; the R.T.E.B. Servicing Certificates, etc. Also courses in Television; Transistors; Radar; Computers; Servomechanisms; Mathematics and Practical Transistor Radio course with equipment. We have **OVER 20 YEARS'** experience in teaching radio subjects and an unbroken record of exam. successes. We are the only privately run British home study Institute specialising in electronic subjects only. Fullest details will be gladly sent without any obligation.

SEND FOR FREE BROCHURE TO :-


**BRITISH NATIONAL RADIO SCHOOL**  
 DEPT 1 · RADIO HOUSE · RUSSELL ST · READING · BERKSHIRE

1WW-110 FOR FURTHER DETAILS.

**MOST VERSATILE  
 MINIATURE RECORDER**

	<p><b>11 SPEEDS WITH ONE MOTOR</b></p> <p>With any one drive motor 11 different chart speeds are available by means of rapidly interchangeable gear-boxes.</p>	<p><b>99 CHART SPEEDS</b></p> <p>From 4" to 450" per hour on all analog (galvanometer) recorders</p>	<p><b>RANGES</b></p> <p>Models available to record A.C. and D.C. current and voltage and temperature.</p>
	<p><b>BELOW SEA LEVEL TO 100,000'</b></p> <p>Performance unaffected by changes in atmospheric pressure.</p>	<p><b>A.C. or D.C. DRIVE</b></p> <p>Chart drive powered by synchronous motors of any standard voltage and frequency or D.C. motors which consume only milliwatts of power.</p>	<p><b>INSIDE, OUTSIDE</b></p> <p>The recorder may be easily weatherproofed, and may be safely used in all weather conditions including high humidity.</p>
<p><b>NO INK</b></p> <p>Smooth high resolution traces are produced without the need for ink, heated stylus or voltage sensitive paper.</p>	<p><b>LARGE CHART CAPACITY</b></p> <p>At 1" per hour a standard chart roll lasts a full month.</p>	<p><b>EXPERT ADVICE</b></p> <p>Our representatives will readily advise you on any application.</p>	<p><b>BELOW ZERO TO 160°F</b></p> <p>2% F.S.D. accuracy maintained over a wide range of ambient temperatures.</p>
<p><b>ROUGH USAGE</b></p> <p>This precision instrument is housed in a rugged die cast aluminium case. Tough, dependable it will give years of faithful service under the most adverse conditions.</p>	<p><b>LOW COST PRICES FROM £53</b></p>	<p><b>RE-ROLL or TEAR OFF</b></p> <p>The chart is rewound inside the unit or in the tear off type it feeds out of the recorder and may be torn off as required.</p>	 <p><b>WEST Instrument Ltd</b></p>
<p>in <b>PORTABLE UNITS</b> or for <b>PANEL MOUNT</b></p>	<p>write or phone for <b>CATALOGUE</b></p>	<p>A Division of <b>GULTON INDUSTRIES (BRITAIN) LTD.</b>                  The Hyde, BRIGHTON, 7, Sussex, England                  Tel: Brighton 66271 Telex 87172</p>	

1WW-111 FOR FURTHER DETAILS.

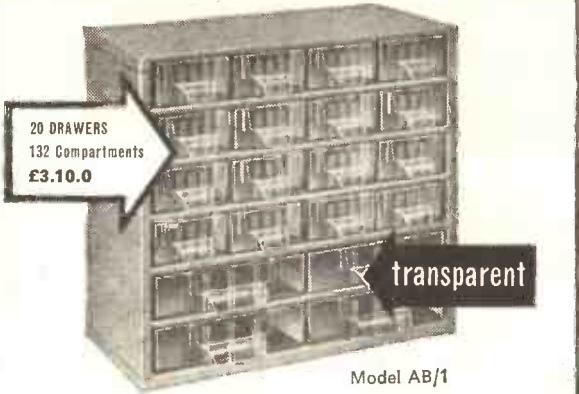

Model AB/1

It's easy to find small components in an original **raaco** cabinet

- You can see at a glance what you want
- 6 drawer sizes with movable dividers
- Stout steel frame will carry heavy loads
- Hang them up, or stack them in units
- Range of 25 different space-saving cabinets

FOR MODERN AND EFFICIENT STORAGE OF SMALL ITEMS

**raaco LTD** Write today for free illustrated leaflet  
Bath House, 57/58 Holborn Viaduct London, E.C.1. Tel: City 3410

1WW-112 FOR FURTHER DETAILS.

## VITALITY BULBS

FROM 1V to 50V IN SIZES FROM 4.5mm to 18mm DIAMETER

Tested and proven  
Miniature and  
Sub Miniature  
Indicator Bulbs

Catalogue:  
Vitality Bulbs Ltd.  
Neville Place,  
Wood Green, N.22.  
Bowes Park 0016

1WW-113 FOR FURTHER DETAILS.


**SEW**

# PANEL METERS

MANUFACTURED BY SHINOHARA ELECTRICAL INSTRUMENTS LTD., JAPAN. FAMOUS ALL OVER THE WORLD FOR THE QUALITY, DEPENDABILITY AND ACCURACY OF THEIR INSTRUMENTS.

The comprehensive range below is available ex-stock. Other ranges to special order. Special quotations for quantities.

## CLEAR PLASTIC METERS



Type MR.52P. 1 21/32in. square fronts.	
50μA	32/6
100μA	29/6
200μA	27/6
500μA	25/6
50-0-50μA	29/6
100-0-100μA	27/6
500-0-500μA	22/6
1-0-1mA	22/6
1mA	22/6
2mA	22/6
5mA	22/6
10mA	22/6
50mA	22/6
100mA	22/6
1.5mA	22/6
200mA	22/6
300mA	22/6
500mA	22/6
1A D.C.	22/6
300V D.C.	32/6
300V A.C.	32/6
"S" Meter	39/6
1mA	39/6

Type MR.52P. 2 1/2in. square fronts.

50μA	57/6
100μA	47/6
500μA	37/6
50-0-50μA	57/6
100-0-100μA	47/6
1mA	32/6
10mA	32/6
1mA	39/6
100mA	45/-
500mA	45/-
1 amp. D.C.	45/-
3 amp. D.C.	45/-
15A D.C.	45/-
30A D.C.	45/-
50V D.C.	45/-
150V A.C.	45/-
300V D.C.	45/-
15V A.C.	45/-
300V A.C.	45/-

Type MR.52P. 4 1/2in. x 4 1/2in. fronts.

50μA	69/6
100μA	59/6
200μA	55/-
500μA	49/6
50-0-50μA	69/6
100-0-100μA	59/6
500-0-500μA	49/6
1-0-1mA	45/-
1mA	45/-
10mA	45/-
50mA	45/-
100mA	45/-
500mA	45/-
1A D.C.	45/-
30A D.C.	29/6
50A D.C.	29/6
*1A A.C.	29/6
*5A A.C.	29/6
*10A A.C.	29/6
*30A A.C.	29/6
*50A A.C.	29/6
10V D.C.	29/6
50V D.C.	29/6
150V D.C.	29/6
300V D.C.	29/6
*30V A.C.	29/6
*60V A.C.	29/6
*150V A.C.	29/6
*300V A.C.	29/6
1A D.C.	29/6
5A D.C.	29/6
15A D.C.	29/6
30V A.C.	35/-
VU Meter	49/6


\*Moving iron, all others moving coil.

## BAKELITE PANEL METERS

Type MR.65. 2 1/2in. square fronts.

25μA	65/-
50μA	42/6
100μA	39/6
500μA	35/-
50-0-50μA	42/6
100-0-100μA	39/6
1-0-1 mA	29/6
50mv.	39/6
100mv.	39/6
1mA	29/6
5mA	29/6
10mA	29/6
50mA	29/6
100mA	29/6
500mA	29/6
1A D.C.	29/6
5A D.C.	29/6
15A D.C.	29/6
30A D.C.	29/6
50A D.C.	29/6
*1A A.C.	29/6
*5A A.C.	29/6
*10A A.C.	29/6
*30A A.C.	29/6
*50A A.C.	29/6
10V D.C.	29/6
50V D.C.	29/6
150V D.C.	29/6
300V D.C.	29/6
*30V A.C.	29/6
*60V A.C.	29/6
*150V A.C.	29/6
*300V A.C.	29/6
1A D.C.	29/6
5A D.C.	29/6
15A D.C.	29/6
30V A.C.	35/-
VU Meter	49/6

\*Moving iron, all others moving coil.




PLEASE ADD POSTAGE  
ILLUSTRATED LEAFLETS AND FURTHER  
DETAILS AVAILABLE FROM THE  
SOLE U.K. DISTRIBUTORS

**G.W. SMITH & CO. (radio) LTD.**  
3-34 LISLE STREET, LONDON,  
W.C.2. Telephone GERard 8204

1WW-114 FOR FURTHER DETAILS.

# New 5" double beam portable oscilloscope for less than £100

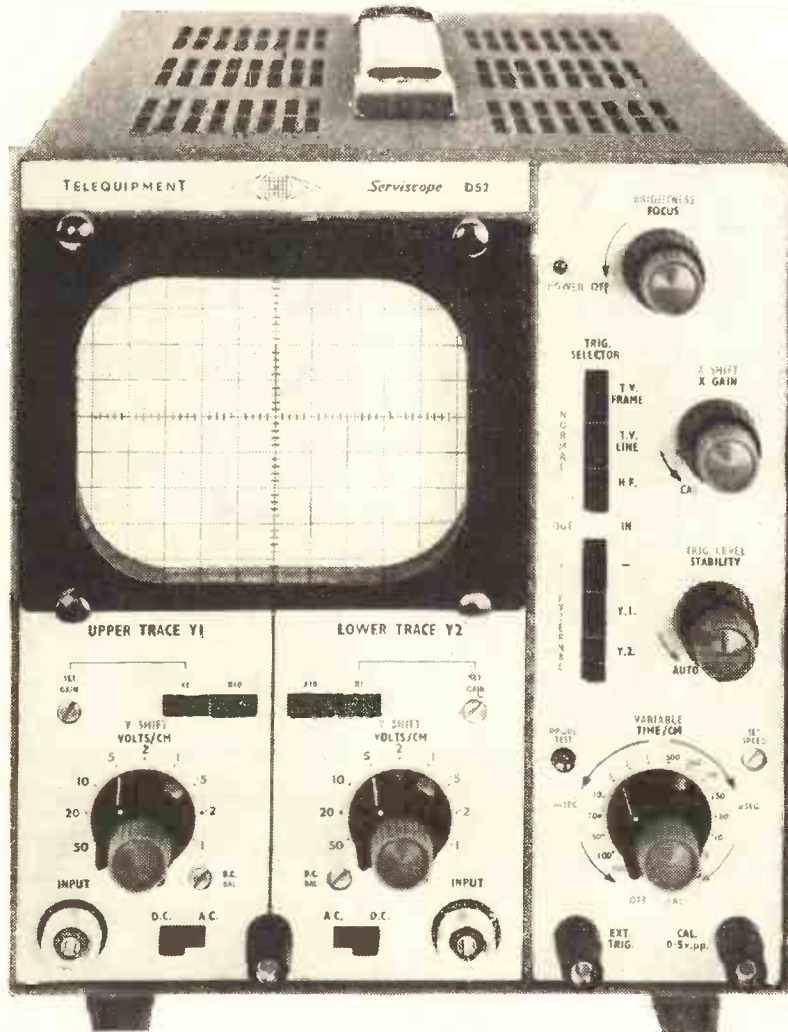

A new 5" flat-faced PDA tube gives a double beam trace of maximum clarity and visibility, on a compact portable instrument versatile and accurate enough for laboratory applications, yet simple and robust enough for general, industrial and teaching purposes. Advanced features include transistor stage high sensitivity amplifiers on both channels; 6 Mc/s bandwidth, new faster starting time base of improved linearity, and printed circuit construction to ensure dependable performance under most arduous working conditions. Note the simplicity of controls characteristic of all Serviscopes.

**£99** A descriptive leaflet will be sent on request.

## TELEQUIPMENT



1W W-115 FOR FURTHER DETAILS.

## D52 SERVISCOPE\*

**Max. sensitivity 10 mV/cm**  
**Calibrated input attenuator—**  
**10 mV/cm to 50 V/cm**  
**18 preset sweep speeds plus variable control**  
**Automatic sync. Trigger with level control.**  
**Squarewave voltage calibration source**  
**DC coupled flyback blanking**  
**Folding tilting feet fitted**

*\*Serviscope is a registered trade mark of*  
 Telequipment Limited, 313 Chase Road,  
 Southgate, London, N.14.  
 Fox Lane 1166.

Iliffe Electrical Publications Ltd.,  
Dorset House, Stamford Street,  
London, S.E.1

Managing Director:

W. E. MILLER, M.A., M.I.E.R.E.

Editor:

F. L. DEVEREUX, B.Sc.

Assistant Editors:

H. W. BARNARD

T. E. IVALL

Editorial

D. C. ROLFE

G. B. SHORTER, B.Sc.

Drawing Office:

H. J. COOKE

Production:

D. R. BRAY

Advertisements:

G. BENTON ROWELL  
(Manager)

J. R. EYTON-JONES

Please address to Editor, Advertisement  
Manager or Publisher as appropriate

© Iliffe Electrical Publications  
Ltd., 1965. Permission in writing  
from the Editor must first be  
obtained before letterpress or  
illustrations are reproduced from  
this journal. Brief extracts or  
comments are allowed provided  
acknowledgement to the journal is  
given.

VOLUME 71 No. 1

PRICE: 3s 0d.

FIFTY-FOURTH YEAR  
OF PUBLICATION


# Wireless World

ELECTRONICS, TELEVISION, RADIO, AUDIO

## JANUARY 1965

- 1 Editorial Comment
- 2 Transistor High-quality Audio Amplifier By J. Dinsdale
- 10 Electronic Laboratory Instrument Practice—1 By T. D. Towers
- 16 Recent Technical Developments
- 17 Oscar III By W. H. Allen
- 18 Miniature Selenium Rectifiers for Television E.H.T. By J. L. Storr-Best
- 24 Monostable Blocking Oscillator By M. D. A. B. Rackowe
- 26 Units By "Cathode Ray"
- 28 H.F. Predictions—January
- 29 World of Wireless
- 31 Personalities
- 33 Conferences and Exhibitions
- 34 Books Received
- 35 Manufacturers' Products
- 41 Letters to the Editor
- 44 Logic Without Tears By H. R. Henly
- 50 Commercial Literature
- 51 "Chorus" By M. Lorant
- 53 January Meetings
- 54 News from Industry
- 56 Real and Imaginary By "Vector"

PUBLISHED MONTHLY (4th Monday of preceding month). Telephone: Waterloo 3333 (70 lines). Telegrams: "Ethaworld, London Telex." Cables: "Ethaworld, London, S.E.1." Annual Subscriptions: Home £2 0s 0d. Overseas £2 5s 0d. Canada and U.S.A. \$6.50. Second-class mail privileges authorised at New York N.Y. BRANCH OFFICES: BIRMINGHAM: King Edward House, New Street, 2. Telephone: Midland 7191. BRISTOL: 11, Marsh Street, 1. Telephone: Bristol 21491/2. COVENTRY: 8-10, Corporation Street. Telephone: Coventry 25210. GLASGOW: 123, Hope Street, C.2. Telephone: Central 1265-6. MANCHESTER: 260, Deansgate, 3. Telephone: Blackfriars 4412. NEW YORK OFFICE U.S.A.: 111, Broadway, 6. Telephone: Digby 9-1197.

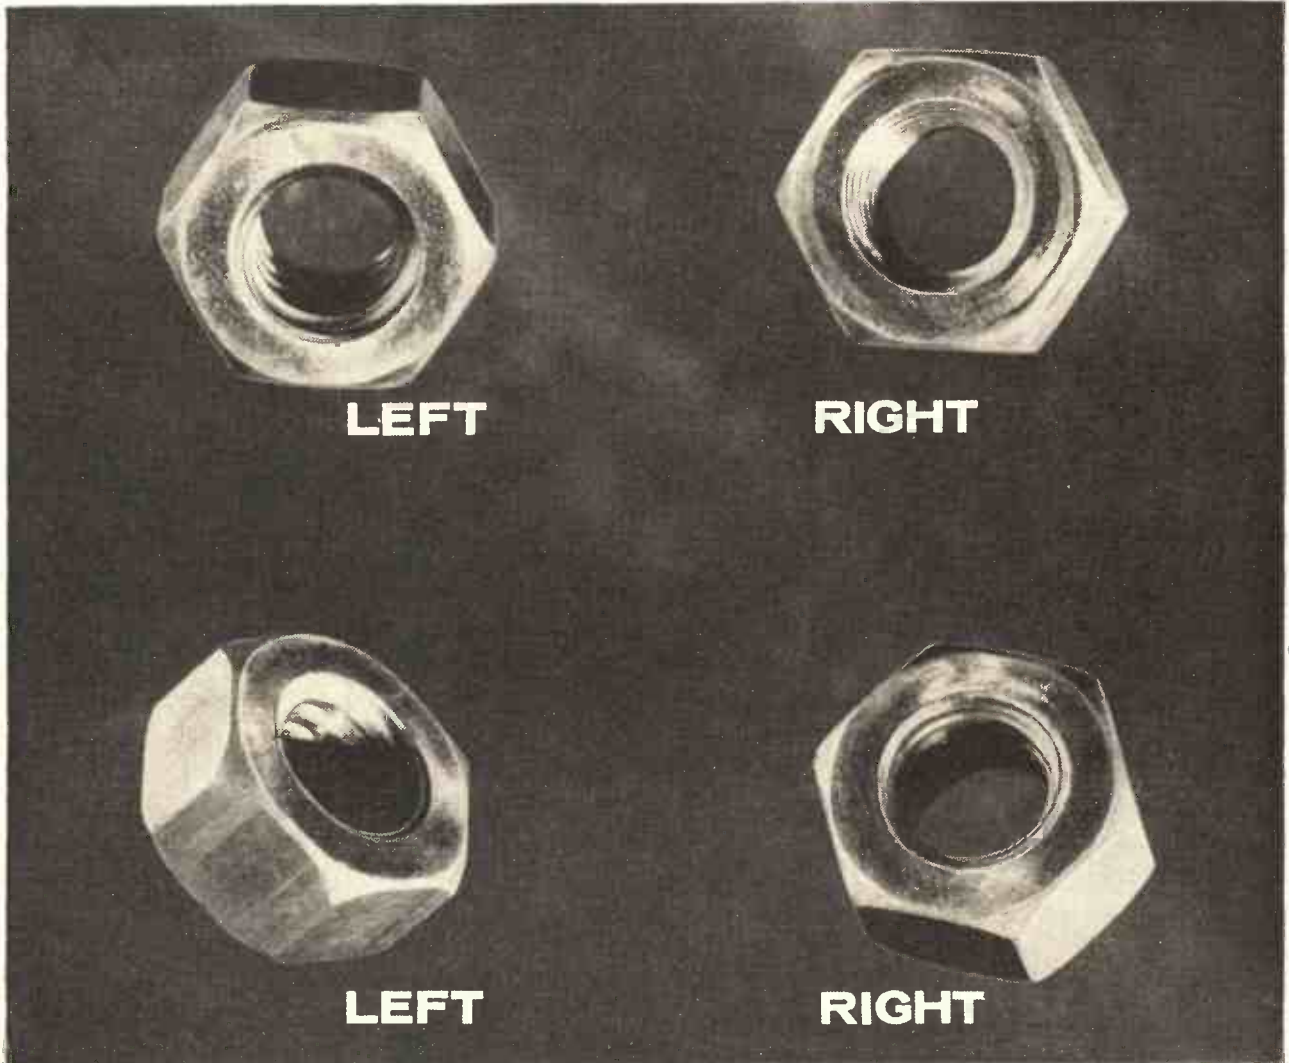

## TV SERVICING'S

### NEW

You can forget about old-style servicing. The independently mounted 'Panorama' direct vision tube can be fixed or unfixed in minutes. It's as simple as four nuts.

## MARCHING ORDERS

One for each of the Panorama's four conveniently positioned mounting lugs. Left, right, left, right. Servicing was never easier. For the first time ever you can forget about dust seals and mounting accessories. And remember, 'Panorama' direct vision introduces: \* sharper, brighter pictures with no dust or multiple reflections. \* truer picture realism thanks to elimination of protective screen. \* new freedom in TV styling.

# Mullard

## PANORAMA PICTURE TUBES

1W-116 FOR FURTHER DETAILS.

Marconi Self-Tuning H.F. System  
—the first in the world to be station  
planned from input to output



# breakthrough

## MST 7½ kW transmitter H1100 series

An h.f. linear amplifier transmitter for high-grade telecommunications.

Frequency range: H1100 and H1101, 4—27.5 Mc/s

H1102 and H1103, 2—27.5 Mc/s

Output power: 7—8 kW p.e.p., 5—6 kW c.w.

The H1100 series meets all CCIR Recommendations.

### saves 85% floor space

Transmitters can be mounted side by side and back to back or against a wall; built-in cooling fan; no external air-ducts. These features lead to smaller, simpler, cheaper buildings or more services in existing buildings.

### simplicity

R.F. circuits have only three tuning controls and two range switches. Final valve can be replaced in 30 seconds. Miniature circuit breakers (used instead of fuses throughout) can be reset instantly. All sub-assemblies are easily tested because they are electrically complete units.

### rugged reliability

Stainless steel shafts in ball-bearings in rigid machined castings; stainless steel spur gears meshing with silicon bronze; heavy r.f. coil contacts with high contact pressure—some examples of design features giving long term endurance and operational reliability. Specified performance achieved with ample margins.


### self-tuning

Types H1101 and H1103, used with MST drive equipment, give *one-man* control of an entire transmitting station and continuous automatic aerial loading.

#### MANUAL TUNING

*Manually tuned versions, types H1100 and H1102, are available which, when fitted with built-in drive units, become entirely self-contained transmitters for four spot frequencies and all types of modulation.*

*Manual tuning takes less than 60 seconds.*

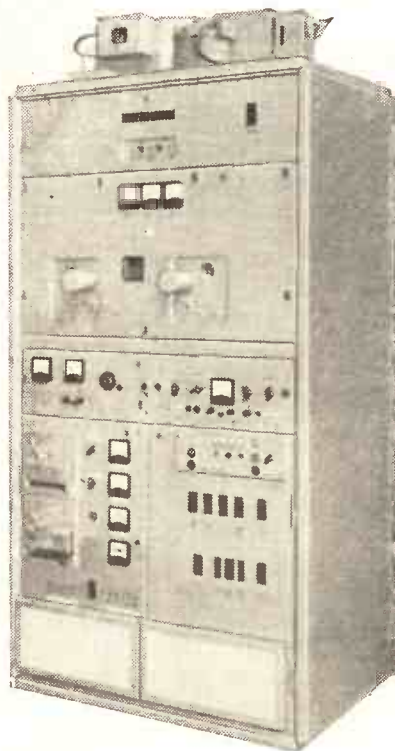

# Marconi telecommunications systems



is one speech channel enough?

If your H.F. radiotelephone circuits are pushed to the limit or if you find new planning difficult—you need Rediplex for maximum utilisation and lower operating costs. Now for the first time, at low capital cost, Redifon introduce a compact ISB multi-channel system for short and medium distance communication. Four speech channels simultaneously using one carrier. The cost of the transmitting and receiving terminals, including the channelling, is far less than you would pay for regular channelling and displacement equipment—a quickly installed packaged deal. It will pay you to find out more about Rediplex. Write now for full specifications.

## The Rediplex system gives you

Four simultaneous speech channels, or any combination of speech, teleprinter, facsimile or tone intelligence signals.

Four crystal controlled spot frequencies, 2 to 16 Mc/s.

100 watts p.e.p output, continuous rating (or 750 watts with the G.A.406 amplifier).

Compatible with Standard International ISB systems.

Completely transistorised receiving terminal and transmitter drive unit.

Modular construction and printed circuits.

Alternative power supply units for a.c. mains or 24 volts battery supplies.

# *Redifon*

REDIFON LIMITED Communications Sales Division  
Broomhill Rd., London, S.W.18. Tel: VANdyke 7281  
A Manufacturing Company in the Rediffusion Group.


☐ Rx2

1WW-118 FOR FURTHER DETAILS.





better  
waveforms  
are  
provided  
by  
the new  
**PHILIPS**  
LF Generators  
**PM 5120 and**  
**PM 5121**

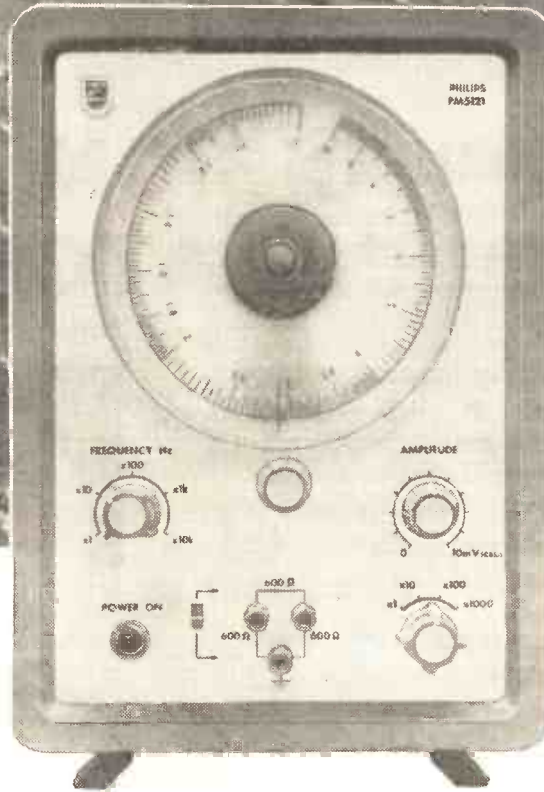

**Frequency range PM 5120**

5 c/s - 600 kc/s ( $\pm 0.5$  dB)  
in 5 ranges  
Error:  $< \pm 2\%$   
Distortion:  $< 0.5\%$  above 10 c/s

**Frequency range PM 5121**

1 c/s - 100 kc/s ( $\pm 0.5$  dB)  
in 5 ranges  
Error:  $< \pm 2\% \pm 0.05$  c/s  
Distortion:  $< 0.5\%$  above 5 c/s

**Output**

Circuit: balanced or unbalanced  
Amplitude: Max. 10 V into 600  $\Omega$   
(balanced) or 20 V open circuit  
Attenuation: 4  $\times$  20 dB steps and  
continuously  
Impedance: 600  $\Omega \pm 2\%$   
Hum and noise:  $< 60$  dB

**Dimensions and weight**

h x w x d: 29 x 22 x 32 cm  
(12 x 9 x 13 in)  
Weight: 12 kg (26 lb)

The PM 5120 and PM 5121 are high-quality generators with low distortion and high stability over a frequency range extending from sub-audio frequencies to the medium wave radio-frequencies. Both generators have a constant output impedance and a highly stable output level, which can be obtained either balanced or unbalanced with respect to earth. As LF Generators are such basic tools for industry and research applications range from electronics to mechanics, from chemistry to ultrasonics, from medicine to geophysics.



**PHILIPS**

electronic measuring instruments

Sales and Service all over the world  
For the U.K.:  
The M.E.L. Equipment Company Ltd.,  
207 Kings Cross Road, London WC1

1WW-115 FOR FURTHER DETAILS.





# PRECISION OSCILLATORS

As designers and as users of oscillators, Marconi set an exceptionally high standard in accurate frequency control. Years of experience give Marconi authority in the production of crystals, crystals with ovens, and complete oscillators.

The new Marconi range of packaged, transistorized, highly stable, pre-tested, quartz crystal oscillators, using conservatively rated silicon transistors, is available within the frequency range 1 kc/s to 75 Mc/s.

*Marconi specialized components are designed and manufactured only when the precision and high performance required is otherwise unobtainable. The Specialized Components catalogue lists the full range.*

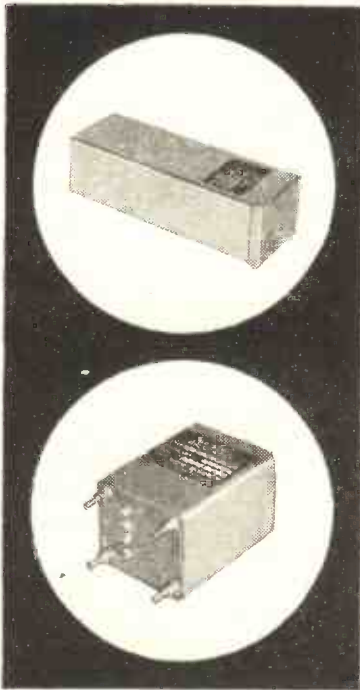

## Marconi specialized components

The Marconi Company Limited, Specialized Components Division, Chelmsford, Essex, England


1WW-120 FOR FURTHER DETAILS.

LTD/F57

# **Vortexion** **quality equipment**


The 120/200 watt Amplifier can deliver its full audio power at any frequency in the range of 30 to 20,000 c.p.s. for which the response is accurate within 1 db with less than 0.2% distortion at 1,000 c.p.s. Noise level -90 db. It can be used to drive mechanical devices, i.e., synchronous capstan or projector motors, etc., for which the power is over 140 watts on continuous sine wave. A floating series parallel output is provided for 100-120v. or 200-250 v., and additional matching transformers for other impedances are available. The input is for 1 mW. 600 ohms.

## 120/200 WATT AMPLIFIER

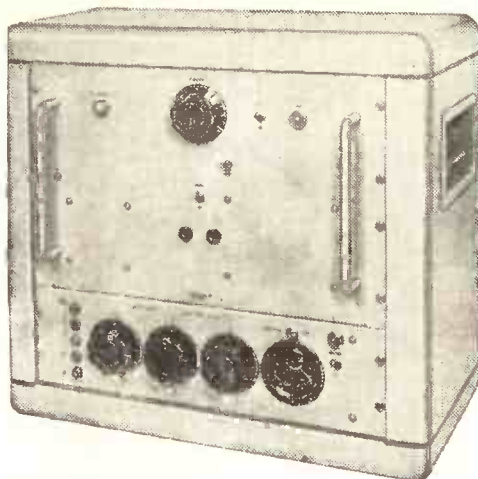

## 30/50 WATT AMPLIFIER

The Vortexion 30/50 watt Amplifier can deliver 50 watts of speech and music or over 30 watts of continuous sine wave and the main amplifier has a response of 30 to 20,000 cps within 1 db at 0.1% distortion and outputs for 4, 7.5, 15 ohm and 100 volt line. Models are available with two, three or four mixed inputs which may be low impedance balanced line microphones, P.U. or Guitar inputs.

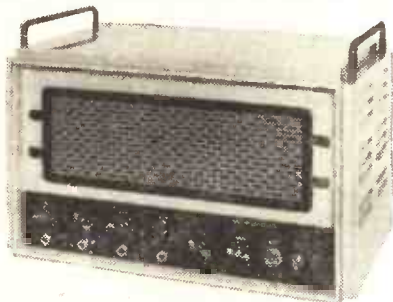

## ELECTRONIC MIXER AMPLIFIER

This high fidelity 10/15 watt Ultra Linear Amplifier has a built-in mixer and Baxandall tone controls. The standard model has 4 inputs, two for balanced 30 ohm microphones, one for pick-up C.C.I.R. compensated and one for tape or radio input. Alternative or additional inputs are available to special order. A feed direct out from the mixer is standard and output impedance of 4-8-16 ohms or 100 volt line are to choice. All inputs and outputs are at the rear and it has been designed for cool continuous operation either on 19 x 7in. rack panel form or in standard ventilated steel case.

Size 18 x 7½ x 9½in. deep.

Price of standard model £49.


The 12-way electronic mixer has facilities for mixing 12 balanced line microphones. Each of the 12 lines has its own potted mumetal shielded microphone transformer and input valve, each control is hermetically sealed. Muting switches are normally fitted on each channel and the unit is fed from its own mumetal shielded mains transformer and metal rectifier.

Also 3-way mixers and Peak Programme Meters.  
Price £60.

4-way Mixers from £40/8/6.

2 x 5-way stereo mixers with outputs for echo chambers, etc., available.

## 12-WAY ELECTRONIC MIXER

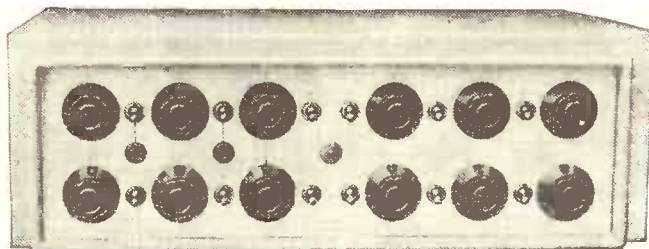

Price of standard model £98.

Full details and prices of the above on request

**VORTEXION LIMITED, 257-263 The Broadway, Wimbledon, London, S.W.19**

Telephone: LIBerty 2814 and 6242-3

Telegrams: "Vortexion London S.W.19"



trust  
without  
dust  
with **NEW**

**MAZDA**  
**RINGUARD**

PICTURE TUBES

New Mazda Rimguard is the shape of tubes to come — no protective screen is required. The result? Service engineers are relieved of the household chore of cleaning the screen and their job made easier and safer; customers get outstanding picture quality free from reflections. New Mazda Rimguard tubes, made by the exclusive "Gold Star" process which ensures superior brightness and focus, are now being fitted by progressive set manufacturers. Put your trust in new Mazda Rimguard for better picture quality, an improved safety factor and low maintenance costs through freedom from dust.

---

23" Rimguard CME 2305 immediately available.  
19" Rimguard CME 1905 shortly available.

---



**Thorn-EMI Radio Valves and Tubes Ltd**

**Head Office:** 155 Charing Cross Road · London, W.C.2 · Tel: GERrard 9797

# NOW... ■ ■ ■

another milestone  
in audio  
engineering

BY

**LEAK**



## STEREO 30

### *Transistorised* INTEGRATED AMPLIFIER

Dimensions: 13ins. x 4 $\frac{1}{4}$ ins. x 9ins. deep. Weight: 14lbs. Price £49 10s 0d.

... superb styling, faultless performance and a breakthrough  
in price and reliability by LEAK ... the First Name in High Fidelity

Reprinted from "WIRELESS WORLD" Editorial May 1963 "... Last autumn, during his presidential address to the British Sound Recording Association, H. J. Leak demonstrated a prototype high-quality transistor amplifier which gave results indistinguishable from those of his valve amplifiers ..."

"People sometimes ask why there is any necessity to change to transistors. The elimination of the output transformer is, in our view, sufficient reason now that solutions of the problem of linearity in the response of the rest of the transistor circuit have been found. As additional bonuses we get smaller size, cooler running and the prospect of longer life."

● Compared with its equivalent valve amplifier the "Stereo 30" gives results which are indistinguishable and it offers these important advantages:

- It is 48% of the weight.
- It is 43% of the size.
- It is 89% of the price.
- It has greater reliability (estimated to be 500% better) because the heat rise within the case is negligible (12°F) and because the maximum voltage is less than 50.

How can the valve possibly survive in view of the above comparisons?

Write now for fully illustrated brochure.

**LEAK**

**H. J. LEAK & CO., LTD.**

**BRUNEL ROAD, WESTWAY FACTORY ESTATE, LONDON, W.3.**

Telephone: SHEpherds Bush 1173


Telegrams: Sinusoidal Ealux, London

# TRANSISTOR DESIGNS BY SINCLAIR 1

## SINCLAIR X-10

### INTEGRATED 10-WATT AMPLIFIER & PRE-AMP

# 1ST

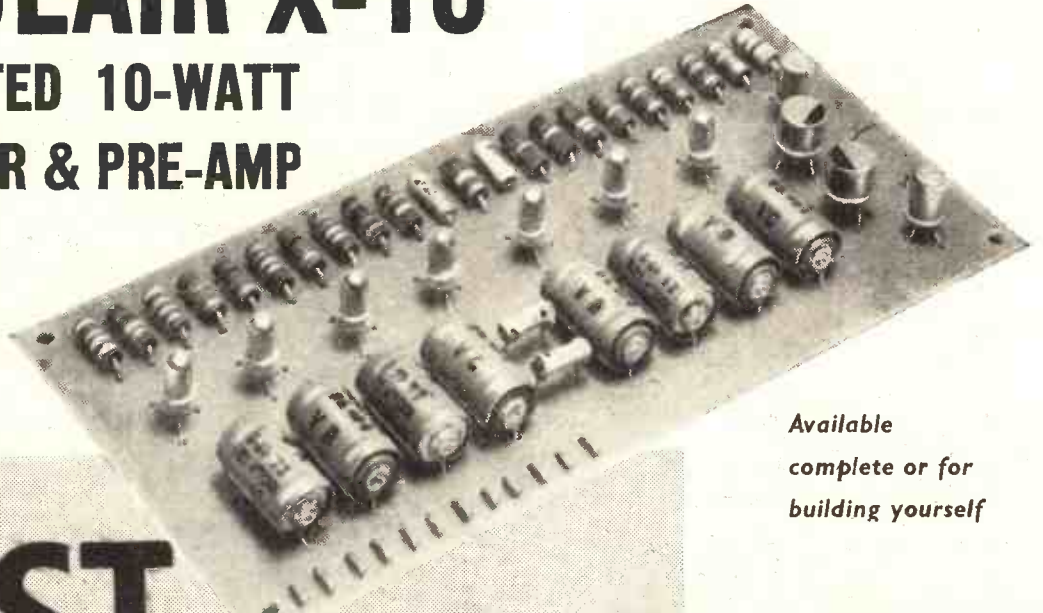

Available  
complete or for  
building yourself

- WITH PULSE - WIDTH MODULATION
- WITH 10 W. OUTPUT & NO HEAT SINK
- WITH SPECIAL NEW OUTPUT STAGE
- TO GIVE HI-FI POWER & PERFORMANCE FROM A COMPLETE UNIT ONLY 6" x 3"

- ★ 11 Transistors and no heat sink
- ★ Unique output stage
- ★ Add your own choice of tone control circuit
- ★ Input sensitivity 1mV into 1k $\Omega$
- ★ Can be used with all types of inputs including low-output pick-ups and microphones
- ★ Total harmonic distortion <0.1%
- ★ Frequency response 5-20,000 c/s  $\pm$ 0.5dB
- ★ Speaker Impedance 15 $\Omega$
- ★ Damping factor—greater than 100
- ★ Supply voltage 12 volts from batteries or mains supply unit
- ★ Size 6in. x 3in.


#### SINCLAIR X-10 MANUAL

Explains how the amplifier functions and how you can add the correct tone and volume control system to suit your precise requirements. A variety of systems is shown, none of which will add more than a few shillings to the original cost of your Sinclair X-10, be it for MONO or STEREO.

The principle of P.W.M., used in this remarkable amplifier as described by Dr. D. R. Birt, in "Wireless World" Feb. 1963, and which is complete with its own pre-amp stage and unique output stage, is briefly as follows: A square wave of constant voltage amplitude and with a frequency well above the highest audio-frequency to be reproduced, is applied to the terminals of the load. As the load has a high impedance at this frequency, negligible current flows through the voice coil of the speaker.

When an input signal is applied, the mark-space

ratio changes with the result that there is a net current flowing through the voice coil which deflects the cone. When the input signal is at any frequency up to 20 kc/s the net current is an exact replica of the input signal and is independent of the transfer characteristics of the output transistors, making the distortion figures incredibly low. The output transistors act as switches and so dissipate negligible power. This enables us to use 5 Mc/s transistors for this with great savings in space, current consumption and costs. No heat sink is required.

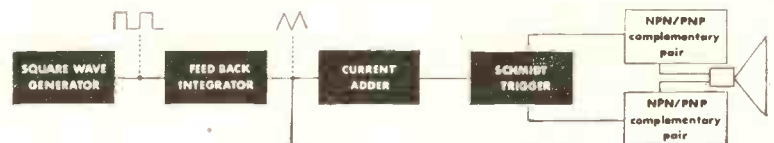

BLOCK DIAGRAM shows in simplified form the stages of this remarkable amplifier. Such design with its very much better standards of performance is made possible by use of the very latest in transistors and high quality components.

All parts including 11 transistors X-10 Manual come to

£5.19.6

Ready built and tested with X-10 Manual

£6.19.6

X-10 Power Supply Unit (ready built) for A.C. Mains 200-240V. Will power up to two X-10s

£2.14.0

# SINCLAIR

SINCLAIR RADIONICS LTD., COMBERTON, CAMBRIDGE

Telephone: COMBERTON 682

1W W—125 FOR FURTHER DETAILS.

# TRANSISTOR DESIGNS BY SINCLAIR 2

## SINCLAIR MICRO-6


The smallest set on earth  
Has fantastic range and power

- British Design
- Tunes over medium wave band
- Bandsread for easy reception of Luxembourg
- Can be built in an evening

**SIZE-1 $\frac{4}{5}$ " X 1 $\frac{3}{10}$ " X  $\frac{1}{2}$ "**  
**WEIGHT- LESS THAN 1-oz.**



NOW MORE THAN EVER IS THE TIME TO BUILD YOUR MICRO-6. With long hours of darkness, the performance from this amazing 6-stage radio is proving sensational. Stations simply pour in from the Continent with outstanding quality and again and again the Micro-6 is reported to be giving excellent results where other sets cannot be used at all, such as in buses, trains, modern steel frame buildings and such like. As the illustration shows, the set is appreciably smaller than a matchbox, yet everything including batteries and ferrite rod aerial is contained in the tiny elegant white, black and gold case. The Micro-6 has vernier-type tuning and is switched on by inserting the Micro-plug of the earpiece into the socket at the side. This remarkable British receiver cannot be too highly recommended both as an intriguing design to build (it can easily be built in an evening) and a most practical radio to use. It's a set you will be delighted to build and use. **IT PLAYS ANYWHERE.**

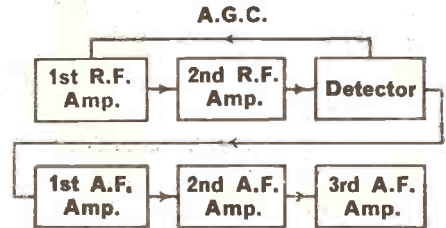

The Micro-6 uses three special Micro Alloy transistors in an original and outstandingly efficient circuit designed to measurements never before made available to constructors in this class of equipment. Two stages of R.F. amplification are followed by an efficient double diode detector which drives a high-gain 3-stage A.F. amplifier. Powerful A.G.C. applied to the first R.F. stage ensures fade-free reception from the most distant stations tuned in and building is very easy. When built, the set will be found robust and dependable.

All parts required to build the Micro-6 including lightweight ear-piece, case and instructions come to

**59/6**

"Transista" nylon strap for wearing the Micro-6 like a wrist watch. 7/6  
Mallory Mercury Cell Type ZM 312 (2 required) each 1/11. Pack of 6, 10/6.

### SINCLAIR TR750 POWER AMPLIFIER

With built-in volume control and switch



SIZE 2" x 2"

All parts with instructions come to

**39/6**


Ready built and tested with instructions

**45/-**

This amplifier makes a powerful car, portable or domestic radio used with the Micro-6 receiver described above and a plug is supplied for connecting to that set. With its own built in volume control and on-off switch, the TR 750 has a full 750 milliwatt transformerless output for 10 mV. into 10 K. ohms and a frequency response from 30 to 20,000 c/s  $\pm$  1dB. It will also make an efficient hi-fi record reproducer used singly or paired for stereo and there are many other uses for the TR 750 which is available for building or ready built.

### SINCLAIR MICRO-AMPLIFIER

- Makes an F.M. Transmitter
- Makes an Audio or Broad Band R.F. Amplifier.



Smaller than a 3d. piece! Frequency response 30 to 50,000 c/s.  $\pm$  1dB. Power gain 60dB. (1,000,000 times). Instructions show you how to make a broad-band R.F. amplifier, F.M. transmitter or a sub-miniature hi-fi amplifier with an output suitable for any earpiece or even loudspeaker. A fascinating design for experimenters, modellers, etc. Parts and instructions come to

**28/6**

### Guarantee

If you are not completely satisfied with your purchase (we are confident you will be delighted) the amount you have paid will be refunded in full instantly and without question.

FULL SERVICE FACILITIES ALWAYS AVAILABLE TO ALL SINCLAIR CUSTOMERS

TO SINCLAIR RADIONICS LTD., COMBERTON, CAMBRIDGE

Phone: COMBERTON 682

Please send items detailed below:

£ s. d.

NAME .....

ADDRESS .....

TOTAL ..... £


For which I enclose cash/cheque/money order.

BLOCK LETTERS

WW165

# THE MIGHTY MIDGET


## Printed Circuit Relay

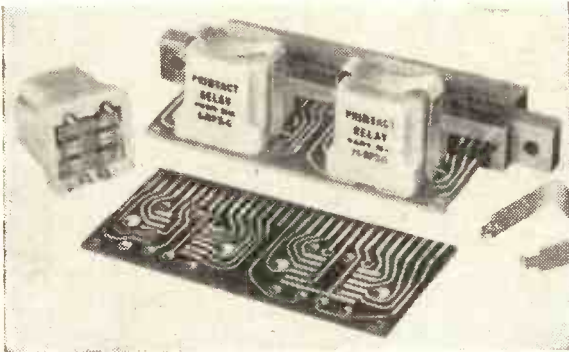

Supplied as standard or latching type, single or double winding. Size  $\frac{7}{8}$  in. cube, weight 0.8 oz. Contact Rating 24 v. D.C. 3 pole double throw. Voltage: 6, 12, 24, v. D.C. Power: 500 mW. Speed 10mS. Temperature: 70°C max.


### 3000 TYPE PLUG-IN

Size 4 in. x 2  $\frac{7}{8}$  in. x 1  $\frac{1}{2}$  in. Specification as 3000 type 6 change overs maximum, light duty.

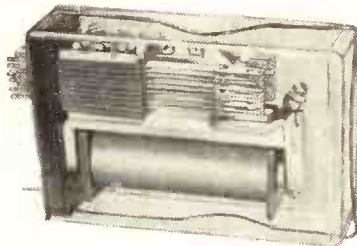

### S 1500 MINIATURES

A.C. or D.C. operating. Coil up to 10,000 ohms. Single or double winding. Contact material — Silver, Platinum. Spring Set — 6 change overs. Light duty maximum. Size: 2  $\frac{11}{16}$  in. x 1  $\frac{1}{2}$  in. x  $\frac{3}{8}$  in.



We are manufacturers of full ranges of 3,000 type, 600 type, and plug in relays, also 12 way mounting rack 19 in. x 3  $\frac{1}{2}$  in. Further details available on request to Mr. Clemens.

**FULLY APPROVED HOUSE  
7 DAY PROTOTYPE SERVICE**


# A. D. S. RELAYS Ltd.

89-97, ST. JOHN STREET, LONDON, E.C.1.  
Telephone: CLErkenwell 3393

1W-127 FOR FURTHER DETAILS.



STOCKISTS




MULTIMINOR MK. IV

### REPAIR SERVICE 7-14 DAYS

We specialise in repair, calibration and conversion of all types of instruments, industrial and precision grade to BSS.89.

Release notes and certificates of accuracy on request.



MODEL 8 MK III

Suppliers of Elliott, Cambridge and Pye instruments.

## LEDON INSTRUMENTS LTD

76-78 DEPTFORD HIGH STREET, LONDON, S.E.8.

TEL.: TIDeway 2689

E.I.D. & G.P.O. APPROVED

CONTRACTOR TO H.M. GOVT.

1W-128 FOR FURTHER DETAILS.

## FROM PRE-AMP TO 20w HI-FI STEREO ASSEMBLY



BY  
BUILDING  
WITH

**MARTIN**  
Audiokits

This unique system enables the constructor to start with a basic assembly of his own choice and to go on adding Audiokit Units, until ultimately he has a 20-watt hi-fi stereo assembly with tone controls, 5 stage selector, etc. Further designs will make Martin hi-fi even more versatile whilst retaining equipment built so far. ANYONE CAN ASSEMBLE AUDIOKITS WITH ASSURED SUCCESS. Leaflet shows how they save money, too.

**FULLY  
TRANSISTORISED  
SUPERB QUALITY  
SAVE £££  
GUARANTEED**

SEND COUPON FOR LEAFLET SHOWING COMPLETE RANGE

MARTIN ELECTRONICS LTD., 155, HIGH ST., BRENTFORD,  
MIDDLESEX Phone: ISL 1161/2

Details of all Martin Audiokits, please.

NAME .....

ADDRESS .....

WWI

1W-129 FOR FURTHER DETAILS.




# Radio&spares Ltd.

FOR ELECTRONIC COMPONENTS-BY RETURN



1WW-130 FOR FURTHER DETAILS.

## NEW STANDARD CASES FROM OLSON

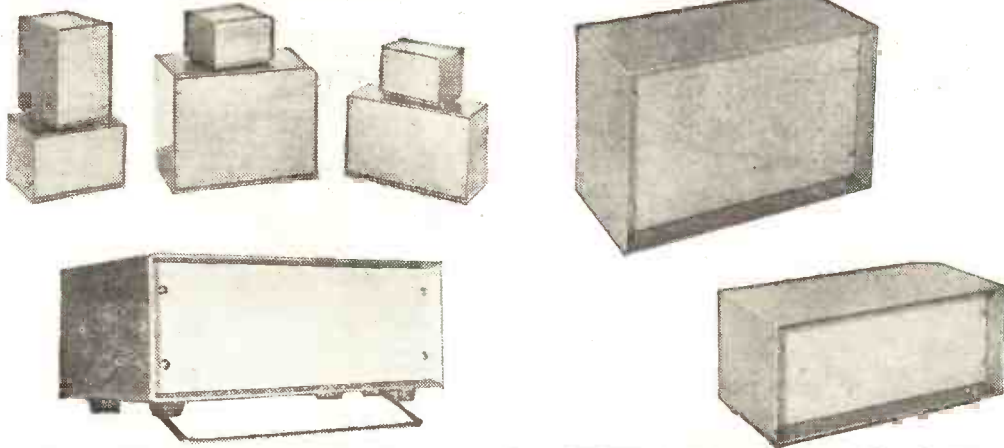


Quotations gladly given for customers' own specifications and special requirement.

WRITE FOR FURTHER DETAILS TO:—

**OLSON ELECTRONIC LIMITED, 54, Myddleton Street,  
LONDON, E.C.1. Telephone: TERminus 8081**

1WW-131 FOR FURTHER DETAILS.

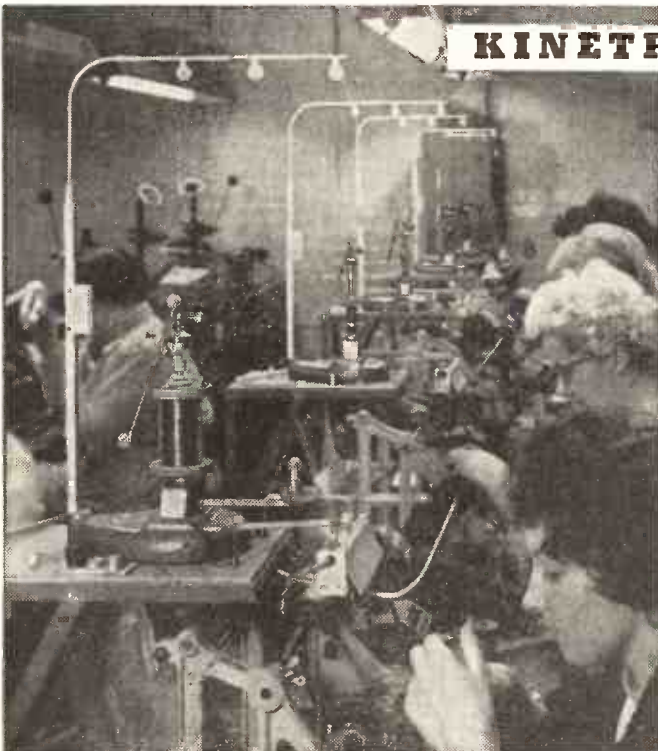

## KINETROL FINE WIRE FEEDER

### Cuts Reject Rate on Fine Wire Windings

Minimise wastage and speed up production with Kinetrol Feeders, proved in service by leading firms.

The wire is unwound from the stationary reel by a lightweight rotating arm, and is then looped under a jockey pulley on the brake arm. The slightest increase in tension above the preset value releases the pad acting on the brake drum and reduces the torque on the rotating arm, thus keeping the wire tension substantially constant, whatever the speed of pull-off. The large inertia forces of the usual rotating reel, which cause snatching, are eliminated. Coils can be wound at well over half the breaking tension of the wire.

**DE-REEL** Fine Wire from 40-52 s.w.g. copper —alloys even finer.

**TENSION** Fine Wire to provide a compact and even coil.

**CONTROL** Fine Wire to eliminate breakage and increase production.

Illustration shows a section of the winding shop at PAINTON & COMPANY, Kingsthorpe, Northampton, where for the past 3 years fine wires have been de-reeled by Kinetrol Wire Feeders.


# KINETROL LTD.

Control Engineers TRADING ESTATE, FARNHAM, SURREY

Tel: Farnham 5070

1WW-132 FOR FURTHER DETAILS.

# SOUND COVERAGE LTD

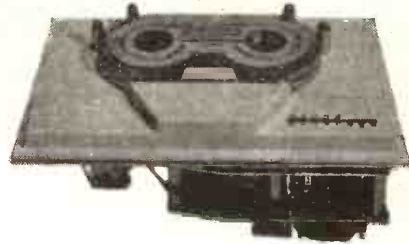

can now offer from stock a complete range of P.A. equipment including line source loudspeakers (indoor and outdoor), wedge loudspeakers, column units, transistorised amplifiers and mixers, a special purpose tape deck, and background music machines and music services. Our special products division can quote you for your special requirements.

Catalogue gladly sent on request.

Please note change of address!

**SOUND COVERAGE LIMITED,  
DECIBEL HOUSE, WELLINGTON TOWN ROAD,  
EAST GRINSTEAD, SUSSEX.**

Telephone No.: East Grinstead 21332/3.

1W W-250 FOR FURTHER DETAILS.



## FOR EAGLE PRODUCTS AT NEW PRICES

The following are available:-

TP703	Transistor Tape Recorder	£18 7 6
TI206	Transistor Intercom. Amplifier	£4 6 0
TA700	Telephones	£3 4 6
730	Zephyr 7 Transistor Radio	£4 16 0
SA80	8-watt Stereo Amplifier	£10 5 6
1000	Microphone	£1 15 3
DM175	Microphone	£2 2 10
MC70	Microphone	£2 17 0
DM17HL	Microphone	£4 9 5
DM16HL	Microphone	£4 17 0
DS2	Microphone Desk Stand	£1 12 0
FS3	Microphone Floor Stand	£3 2 4

### TRANSISTORS

AA120	4/6	OC42	6/6	SETS OF TRANSISTORS
AC107	14/6	OC43	5/6	Set 1.
AC113	8/-	OC44	5/9	Comprising OC44
AC114	8/-	OC44M	8/8	2 x OC45 matched pair and
AC154	8/-	OC45	5/9	OC81 set
AC155	6/6	OC45M	8/-	Set 2.
AC186	8/-	OC70	6/6	Comprising OC81
AC157	10/6	OC71	4/3	Driver OC81
AC165	10/-	OC72	6/-	set
AC186	10/-	2-OC72	18/-	
AC167	12/-	OC74	6/6	
AC168	15/-	OC75	6/-	
AC169	16/6	OC78	8/-	
AD140	25/-	OC81	5/9	pair OC81
AF102	25/6	OC81M	5/9	set
AF114	11/-	OC82	10/-	
AF115	10/6	OC83	4/6	AA129
AF116	10/-	OC136	9/-	OA70
AF117	9/6	OC169	6/6	OA79
AF118	20/-	OC170	9/6	OA81
AF124	10/-	OC171	10/6	OA90
AF125	10/6	XA103	3/6	OA91
AF126	10/-	XA104	3/6	OA95
AF127	9/6	AE1, BTH,	3/6	OA210
BA116	9/-	GT40	3/6	GBX34
BY100	7/6	Yellow Spot	1/6	GBX35
BY105	13/-	Green Spot	1/6	GBX36
BY114	7/6	White Spot	2/-	
OC16W	35/-	Red Spot	2/-	ZENIE DIODE
OC19	25/-	Package	Set 1	OA2207
OC26	25/-	XB103D and 3X	Transistor	
OC35	15/6	XC101T	8/6	Holders

GT50	Radio Jack	£1 7 0
T179	Tape Head Demagnetizer	£1 12 0
MM4	Microphone Mixer	£2 13 6
PS35	3.5 mm. Plug and Socket	2 8
PS25	2.5 mm. Plug and Socket	2 8
F31	Standard Jack Plug	2 8
SP31	Standard Shielded Jack Plug	3 9
OC34	Standard Socket	2 3
S83271	Sub-Min. Slide Switch DPDT	2 3
S8219	Min. Slide Switch DPT	2 3
MR4	Earphone, low res.	3 3
MR60	Earphone with ear hanger	4 4
CR5	Earphone, crystal	4 4
T501	Vernier Dial	13 8
T502	Vernier Dial	15 0
T503	Vernier Dial	17 3
TC801	Turnover Cartridge	11 0
K416	Volume Control	3 3
PVC105	Variable Condenser	3 3
LT44/700	Transistor Transformers, pair	8 9
TP100	Telephone Pick-up Coil	10 3
SR20	High Resistance Headphone	13 0
BM36R	Lapel Microphone Magnetic	9 3
MCI	Microphone Crystal Cartridge	4 9
TP29G	2-in. Speaker	9 3
CM16	Guitar Pick-up	13 6
GM35	Guitar Microphone	£3 4 6
EP30K	50,000 O.P.V. Multimeter	£10 16 0
EP30K	30,000 O.P.V. Multimeter	£7 11 0
EP20K	20,000 O.P.V. Multimeter	£5 7 6
EP10K	10,000 O.P.V. Multimeter	£4 6 0
TK20A	1,000 O.P.V. Multimeter	£2 13 6
L20	Leather Case for EP30K	£1 1 0
MR2P	50 microamp Panel Meter	£2 3 0
MR2P	500 microamp Panel Meter	£1 12 0
MR2P	1 mA. Panel Meter	£1 12 0
MR2P	5 mA. Panel Meter	£1 12 0
MR2P	300-volt Panel Meter	£1 12 0
SR2P	"S" Panel Meter	£1 18 0
MR3P	1 mA. Panel Meter	£2 13 6
LTI/1	Signal Injector	£1 18 0
RF40	Field Indicator	£3 15 6


AR13	Test Lead Kit	10 3
Record Player and Tape Deck Units:		
BSR Monarch UA14		£6 6 0
BSR Monarch UA15		£6 19 6
The new BSR Monarch UA1588 fitted with CI ceramic stereo cartridge		
TD2	Tape Deck, half track	£10 18 11
TD10	Tape Deck, half track	£8 18 0
BSR Monarch TU12		£10 5 0
BSR Monarch TU7		£3 10 0
BSR Monarch GU7		£3 17 6
Garrard Autostim		£7 15 0
Garrard AT6		£11 5 0
Garrard SRP10		£6 0 11
All the above are also available with stereo cartridges at slight extra cost.		
Sinclair Kits:		
Sinclair Micro 6		£2 19 6
TR750 Power Amplifier		£1 19 6
Sinclair Micro Injector		£1 7 6
Sinclair Micro Amplifier		£1 8 6
Sinclair X10 Kit		£5 19 6
Sinclair X10 Ready Built		£6 19 6
Maina Unit for above		£2 14 6

Trade Enquiries Invited.

### CATALOGUE

Our latest 1964/65 Catalogue is now available. Copies have been sent to many of our regular customers. If you have not received your copy please drop us a card. Please send 1/- in stamps. Wholesale terms to Schools, Universities and Business Houses. Trade Catalogue now available. Please apply on business letter heading.

**TERMS:** Cash with Order or C.O.D. Postage and Packing Charges extra. Single valves 9d., Minimum Parcel Post charges 2/-. Please include sufficient postage with your order. Minimum C.O.D. fees and postage 3/6. These Postal Rates apply to U.K. only. For full terms of business see inside cover of catalogue, Personal shoppers 9 a.m. to 5 p.m. Mon. to Friday. Saturday 10 a.m. to 1 p.m.



**CARRIER FREQUENCY SHIFT ADAPTOR.** This modern equipment of recent manufacture is in excellent condition and suitable for operation with most Service Receivers. IF frequency adjustable internally 445-475 kc/s. The adaptor will operate two independent Teleprinters. Power supplies A.C. mains 230 v. or 24 v. D.C. Price £12/10/-, Carr. 25/-.

**POWER SUPPLY UNIT PN-12B.** Ex BC 640, 230 volts A.C. input, fits 19in. rack, 800 volts D.C. @ 350 ma., 395 volts, 300 ma., 4 x 5U4G valves, 2 chokes 9 H., 300 ma., 2 x 10 mfd. oil filled caps, £6/10/- each, carr. £1.

**RELAY UNIT.** G.P.O. 600 types 5 relays 150 ohm 1 set C/O., and 5 relays 400 ohm 2 M., 1 set C/O, in metal box 8 x 6 x 5 inches, £2, post 5/-.

**AR88 SPARES.** 14 valves, headphones and 3 pilot lamps, new original cartons, £3/10/- each, post 2/6.

**FACSIMILE KEYSER UNIT KY 75 SRT,** 115/230 volts, £25 ea.


**MODULATOR MD 168/UX** (for the above keyer), £12/10/-.

**SIGNAL GENERATOR 1-196A.** Freq. range 100-156 mc/s. Power requirements 115 v. A.C. or batteries, £3 each. Carr. 15/-.

**AR88 PORTABLE KITS.** Fine, well-made box for the receiver and spares with original speaker. Vibrator unit 6 volt D.C., 14 valves, lamps, headset, shock mounts, cables, brand new, £7/12/6, carr. 25/-.

**METERS.** 0-60 amps, centre zero 6in. scale, proj. m.c. 17/6 each, 5/- post. 0-150 amps., centre zero 6in. scale, proj. m.c. (requires external shunt), 17/6 each, 5/- post. 0-100 amps., 6in. scale, A.C./D.C., 30/- each, 6/6 post. 90-180 v., A.C./D.C., 4in. scale, £1 each, 5/- post.

**BC-221 or LM 13.** Freq. meter complete with original charts in good working order. Range 125 kc/s.-20 Mc/s., £16/10/-, carr. 15/-.



**SIGNAL GENERATORS**

**TS.13AP.** 115 v. A.C. freq. 9305-9445 mc/s. complete with valves 723/AB and waveguide, tuning, etc. £7/10/-, 25/- carr.

**TF.144G.** 230 v. A.C. 85 kc/s.-25 mc/s. In excellent condition £16/10/- ea., 25/- carr.

**TS.12AP.** Standing Wave Indicator Equipment. Complete with Amplifier and waveguide plumbing equipment, £12/10/- each, 15/- carr.

**TS.36AP** Power Meter, with accessories, used for checking radar outputs, £5 each, 10/- carr.

**804** Signal Generator. Freq. 7.5-330 mc/s. in 5 bands. Power supplies 115-230 v. A.C. In excellent condition, £25, carr. £1.

**TF.338/B.** Variable Attenuator. Variable 0-25 db. switched 20, 40, 60, 80 db. 600 ohms input and output, £3 each, post 6/-.

**AR88 SPEAKER.** New, £3/10/-, carr. 5/-.

**AR88 VIBRATOR UNIT,** new, 17/6, carr. 6/6.

**FOR EXPORT ONLY**

**TRANS./REC. WIRELESS SET No. 31.** Complete sets with aerials, headphones & mikes in working order. Freq. 30/40 Mc/s. 4 channel xtal controlled, £8/10/- ea.



**WIRELESS SET No. 88.** 4 channel, xtal controlled, complete with all valves and xtal and attachments, £10 each

**WIRELESS SET No. C52.** 12 v. D.C. 1.7-16 Mc/s. on three bands, 110 watts output. CW, MCW, etc. Can be used as Vehicle T/R, or Base station (as new complete set £52).

**TS-34 PORTABLE SINGLE BEAM OSCILLOSCOPE**

Viewable Waveforms. 30 c/s. to 1 mc/s.  
Cathode Ray Tube. 2in. screen magnified to approx. 4in.

Input Voltage, Low Impedance 0.1 to 1 volt.  
High Impedance, 0db. 0.1 to 1 volt.  
20db. 1 to 10 volts.  
40db. 10 to 100 volts.

Input Impedance. low—62 ohms.  
high—430 ohms/30pF.

Time base, single stroke continuous. 5-50-250 microseconds.  
Internal Calibrating Pulses. 10 to 50,000 c/s.  
A.C. Main Voltage. 1 microsecond intervals. 115 v.

Dimensions: 6in x 8in. x 15in. oscilloscope alone, Weight: 26lbs.  
29in. x 9 1/2in. x 10in. carrying case, Weight: 16lbs.

In excellent condition, price £15, repairable condition £9, carr. 15/-.

Complete installations can be quoted for. Please write further details List available 6d. S.A.E. for all enquiries.

**WHEATSTONE BRIDGE** in a beautiful oak case, centre zero galvanometer 2.5 mA., 4 stud switches, 0-10, 0-100 ohms, 0-inf., size 16 x 7 1/2 x 6in., 45/- each, 5/- post.

**DE-ICER, Controller Mk. 3.** Contains 10 relays D.P. change-over heavy duty contacts, 1 relay 4P, C/O (235 ohms coil) Stud switch 30-way relay operated, one five-way ditto, D.C. timing motor with Chronometric governor 20-30 volts 12 RPM, geared to two 30-way stud switches and two Ledex solenoids, 1 delay relay, etc., sealed in steel case, size 4 x 5 x 7in., £3 each, post 5/-.

**BC640 MODULATOR UNIT.** 2 x 811's, mod. transformer and fil., trans. complete mod. unit fits 19in. rack 50 watts, £5/10/-, carr. £1.

**TRANSFORMERS (Isolation).** 230 to 115 volts 300 va., £3 each, 5/- post. 230-115 volt auto. 750 watts £4, carr. 10/-, 230 v., pri. 1850-0-1850 at 500 ma., £5 each, carr. 15/6. 230/115 v. auto. 300 va. £2, post 6/6.

**MARCONI V. LVE VOLTMETERS TF428-B/1** Ranges: 0 to 1.5, 5, 15, 50 and 150 volts. Fitted with probe unit for RF measurements. 230 v. mains input Brand new, £12/10/- each, carr. 10/-.



**TCS MODULATION TRANSFORMER** 20 w. Pri., 6,000 ohm. C.T. Sec., 6,000 ohm 25/- each, post 3/6. **MICROPHONE TRANSFORMER** Pri., 75 ohm. Sec., 125,000 ohm. 10/- each, post 2/6. **OUTPUT TRANSFORMER.** Pri., 7,500 ohm. Sec., 500 ohm. C.T., 2.5 v. 12/6 each, post 3/-.

**POWER SUPPLY** unit for SENDER No. 36 110-240 v. A.C. input contains Speech amplifier. Modulator and External power supplies, 3xFW4/500 rectifiers provide H.T. for F.R. unit Speech amplifier 6C5G, Modulator 2x6C5G and 2 x 807 output. Size 24 x 16 x 14 inches Housed in a fine oak case with circuit. Wt. 110 lbs. As new £6/12/6 carr. 30/-.

**CONVERTERS.** Type 8 a., 24 v. D.C., 115 v. A.C. at 1.8 amps. 400 cycles, 3-phase. £5 each, carr. 7/6.

**CONDENSERS.** 1 mfd., 20 kv., £6/12/6 each, post 12/6 each. 0.25 mfd., 32,500 volts Wkg. £5 each, post 12/6 each. 150 mfd., 290 volts A.C. £5 each, post 12/6. 50 mfd. 330 volts A.C. 40/-, post 4/-.

10 mfd., 1,000 v. 12/6 post 2/6. 8 mfd., 1,500 volts 17/6, post 2/6. 8 mfd., 1,200 volts 12/6 post 3/-.

8 mfd. 600 volts, 8/6, post 2/6. 0.25 mfd. 2 kv. 4/-, post 1/6. Vacuum condenser 50 pf. 32 kv. 30/-, post 1/6. 6 pf. 20 kv. 22/6, post 1/6. All the above are new in cartons.



**POWER & SMOOTHING UNITS.** 100-250 v., A.C. input 24 v., D.C. at 3 amps. or 12 v. twice at 3 amps., continuous rating, switched fused, etc. In metal case 19 x 7 x 7in. Smoothing two large chokes and 0-1 ma. meter scaled 0-50 volts. £7/10/- (pr.), 15/- carr.

**POWER FACTOR CONDENSERS.** 160 mfd., 290 v. A.C. working. £5/10/- each, carr. 10/-.

4 mfd., 12,500 v. D.C. working, £7/10/- each, carr. 15/-.

**POWERSTAT VARIAC.** Type 1126. Pri. 115 v., 50-60 cys. Output 0-135 v. @ 15 amps. £8/10/- each, carr. 15/-.

**HEADPHONES.** DLR 5, 12/6 pr., No. 10 Headset, with microphone, 15/- pr. Post 2/6.

**BLOWER MOTORS.** 24 v. D.C. (small U.S.A.), 12/6, post 2/-.

**TELEPRINTERS,** Type 7B, used, good condition. 24v D.C. £12/10/- each, carr. £1.

**FSK UNIT,** Type 2 (ATE Ltd.), £12/10/- each, carr. £1.

**OSCILLOSCOPES,** Cossor 1035 and 1049, used condition £30 each. Hartley type 13A £25 each. Solartron Type CT316 £20 each.

**SPECIAL RECEIVERS.** ARN.21 or 9171 (Tacan equipment). (Please write further details).

**ROTARY TRANSFORMERS,** 24v D.C. input 175v at 40 ma., 25/- each 2/- post. EICOR 12v D.C. input 400v at 180ma. output, 30/- each 4/- post.

**TX DRIVER UNIT** 100-156 mc/s. Ideal for two meters, Valves 3C24, in excellent condition, fits 19in. rack, £5 each, carr. 20/-.

**CONTROL UNIT.** 230 v. A.C. output 24 v. 2 amps., 230 v. A.C. solenoid switch, 15 amps., plus relays and switches, etc., £2/10/-, carr. 12/6.

**RECEIVERS. HRO.** Used condition, less coils, £10 each, carr. £1.

S.36, used condition, freq. 30-143 mc/s. £25, carr. £2. S.27/U, used freq. 143-210 mc/s., £25, £2 carr. C.52, used, freq. 1.75-16 mc/s., £5, carr. £1. H.63 (similar to 1392), 100-156 mc/s., £5, carr. £1.

**MARINE RADAR EQUIPMENT.** Complete installation for 110/220 v., 3 cmm., made by B.T.H. Ltd. The equipment is mounted in a weatherproof steel van 6 x 6 x 6ft., with the scanner on top to rotate 360 deg. The units are available with service manuals and some spares. £500 each. F.O.B.

**UNISELECTORS.** 6 bank, 25 way, 20 ohm. coil, £2 each, post 2/6; 5 bank, 25 way, 20 ohm. coil, 35/- each, post 2/6. (Ex-new equipment.)

**AERIAL MAST.** 25ft. self supporting with ceramic base, £5 each, carr. 30/-.

**W. MILLS**

3-B TRULOCK ROAD, TOTTENHAM, N.17  
Phone: Tottenham 9213 & 9330

**R.S.C.**  
(MANCHESTER) LTD.

Post Orders to R.S.C. (M/C) Ltd., 54 Wellington St., Leeds, 1.  
Trade Supplied. Personal Shoppers to any of Branches below.

**R.S.C.**  
(MANCHESTER) LTD.

Post Terms. C.W.O. or C.O.D. No C.O.D. under £1.  
Postage 2/9 extra on orders under £2. 4/6 extra under  
£5 unless carr. stated.

**R.S.C.**  
(MANCHESTER) LTD.

**LEICESTER**  
32 High Street  
(Half day Thurs.)

**BIRMINGHAM**  
Gt. Western Arcade.  
New spacious premises  
(Opp. Snow Hill Str.)  
(No hall day)

**SHEFFIELD**  
13 Exchange Street  
(Castle Market Buildings)  
(Half day closing Thursday)

**HULL**  
51  
Savile St.

**M'CHESTER**  
60a-60b Oldham St.  
New large store.

**LIVERPOOL**  
73 Dale Street  
8 mins. from Lime  
St. Stn. (No hall day)

**LEEDS**  
5-7 County (Mecca)  
Arcade, Briggate,  
Leeds, 1.  
(No hall day)

**BRADFORD**  
58 Morley Street  
(Half day Wed.)  
Opening early Feb  
larger premises at  
10 North Parade.

**BRISTOL NOW OPEN**  
14, LOWER CASTLE STREET. (Half-day Wednesday)

**HI-FI 10 WATT AMPLIFIERS**  
BRAND NEW Ex Guitar Amplifiers. £7. 19. 6

A REMARKABLE OPPORTUNITY. Push-pull output. Latest high efficiency valves. Dual separately controlled inputs for mike and gram. Separate bass and treble controls. High sensitivity. Output for 3 ohm or 15 ohm loudspeaker. Guaranteed tested and in perfect working order. For 200-250 A.C. mains.

**LINEAR TAPE PRE-AMPLIFIERS** Type LP/1. Switched negative feedback equalisation. Positions for Record 1 1/2, 3 1/2, 7 1/2, and Playback. EM84 Recording Level indicator. Designed primarily as the link between Collaro Tape Transcriber and high fidelity amplifier but suitable almost any Tape Deck. 9 1/2 GNS. Send S.A.E. for leaflet.

**LINEAR L46 MINIATURE 4 1/2 W. QUALITY AMPLIFIER.** Suitable for use with any record playing unit and most microphones. Negative feedback 12 D.B. Bass and treble controls. For A.C. mains input 200-250 v. m.c.p.s. Output for 2 ohm speaker. Three miniature Mullard Valves. Size only 6 x 5 x 2 1/2 in. Chassis fully isolated from mains. Guaranteed 12 months. OR Deposit 23/6 and 5 monthly payments of 23/6. Send S.A.E. for leaflet.

**R.S.C. POWER PACKS 200-250 v. A.C.** Completely enclosed in louvered enamelled case, 8 x 5 1/2 x 2 1/2 in. Output fully smoothed 250 v. 60 mA. and 6.3 v. 2 a. 39/9.

**SUPERHET RADIO FEEDER UNIT**  
Design of a high quality Radio Tuner (specially suitable for use with any of our Amplifiers). Triode Heptrode, F changer is used. Pentode I.F. and double Diode Second Detector. Delayed A.V.C. W. Ch. Sw. incorporates Gram. position. Controls are Tuning W. Ch. and Vol. Simple alignment instructions. Only 250 v. 15 mA. H.T. and L.T. or 6.3 v. 1 amp. required from amplifier. Size of unit approx. 9-6-7 in. high. Send S.A.E. for illustrated leaflet. Total building cost of 5 GNS. Point-to-point wiring diagrams and instructions 2/6.

**FANE EXTRA HEAVY DUTY LOUSPEAKERS**  
Total Flux 375,000 lines. Extremely high sensitivity. Exceptionally robust 3 in. diameter Voice Coil assemblies. Impedance 15 ohms. Type 153 15 in. 40 watts 18 GNS. or Deposit 37/9 and 12 monthly payments 31/6. Type 183 60 watts 18 in. 24 GNS. Or Deposit 51/- and 12 monthly payments 42/9. Send S.A.E. for leaflet.

**STOCKISTS OF ARMSTRONG CHASSIS, GOODMAN'S, W.B., and FANE SPEAKERS, LINEAR, LEAK, VERDIK, ROGERS, DULCI AMPLIFIERS, GARRARD and GOLDING TURNTABLES CASH or H.P.**

**THE SKYFOUR T.R.F. RECEIVER**  
A design of a 3-valve 200-250 v. A.C. mains L and M wave T.R.F. receiver with selenium rectifier. It employs valves 6K7, SP01, 6V6 and is specially designed for simplicity in wiring. Sensitivity and quality are well up to standard. Point to Point wiring diagram, instructions and parts list 1/9. This receiver can be built for a maximum of £4/19/6 including veneered walnut cabinet.

**ACOS GP67-2G HI-FI Crystal Cartridges** with sapphire stylus. Standard replacement for Garrard, B.S.R. and Collaro. Only 16/9. Acos Stereo/Monaural 35/9. Ronette. Stereo/Monaural 39/9.

**TRANSISTOR SALE**  
Mullard OC71 3/9. OC45 4/11. OC44 4/11. OC72 3/11. OC81 3/11. OC17 8/9. Ediswan XA100 1/9. XB113. XB104. XC101A. 3/9 ea. Postage 6d. for up to 3 Transistors.

**JASON F.M. TUNERS**  
Type FMT1. All parts including Dial, Escutcheon, Punched Chassis and Valves. Power supply required 150 v. 25 mA. and 6.3 v. 1.5 a. Type FMT1 £8/19/6 Type FMT2 £8/19/6

**EX-GOVT. SELENIUM RECTIFIERS 19/9**  
12 v. 15 amps. F.W. (Bridge). Only

**EX. GOVT. SMOOTHING CHOKES**  
60 mA. 10 h. 400 ohms 3/11. 100 mA. 10 h. 100 ohms 6/9. 150 mA. 10 h. 120 ohms 10/11. 120 mA. 12 h. 100 ohms 9/9. 200 mA. 5-10 h. 100 ohms 11/9. 250 mA. 5 h. 50 ohms 10/9.

**TANNOY 8 WATT RE-TRANSLOR LOUSPEAKERS.** 8 ohms for workshop, factory or outdoor use 25/9 ea.

**Only 3 pairs of soldered joints plus mains. AUDIOTRINE HI-FI TAPE RECORDER KIT**  
Build a high quality recorder in the £70 class for only



**25 1/2** GNS. Can be assembled in 1 hour. Carr. 17/6. Send S.A.E. for leaflet.

OR DEPOSIT £2.13.9 and 12 monthly payments of 44/6 Cash price if settled in 3 months.

INCORPORATING THE LATEST COLLARO STUDIO TAPE TRANSCRIBER THE AUDIOTRINE HIGH QUALITY TAPE AMPLIFIER. A HIGH FLUX 7 x 4 in. LOUSPEAKER Reel of Best Quality TAPE, Spare Tape Spool, a Portable Cabinet, size approx. 14 1/2 x 15 x 8 1/2 in. finished in complementary shades of rexine and Vynair. Connection diagram for wiring amplifier to transcriber provided.


FEATURES INCLUDE: ★ 3-SPEEDS ★ FREQUENCY RESPONSE 50-11,000 c.p.s. ★ SWITCHED NEGATIVE FEEDBACK EQUALIZING FOR EACH SPEED ★ OUTPUT 4 WATTS ★ MAGIC EYE RECORDING LEVEL INDICATOR ★ 3 MOTORS ★ Fast rewind ★ TAPE MEASURING AND CALIBRATING DEVICE ★ TAKES FULL 7 in. DIAMETER REELS OF TAPE ★ NEGLIGIBLE HUM ★ ENTIRELY EFFECTIVE AUTOMATIC ERASURE.

**R.S.C. BATTERY TO MAINS CONVERSION UNITS**

Type BMI. An all-dry battery eliminator. Size 5 1/2 x 4 1/2 x 2 in. approx. Completely replaces batteries supply 1.4 v. and 90 v. where A.C. mains 200-250 v. 50 c/s. is available. Suitable for all battery portable receivers requiring 1.4 v. and 90 v. Complete kit with diagram 39/9, or ready for use 49/9. Type BM2. Size 8 x 5 1/2 x 2 1/2 in. Supplies 120 v. 90 v. and 60 v. 40 mA. and 2 v. 0.4 a. to 1 amp., fully smoothed THEREBY COMPLETELY REPLACING BOTH H.T. BATTERIES AND L.T. v. ACCUMULATORS when connected to A.C. mains supply 200-250 v. 50 c/s. SUITABLE FOR ALL BATTERY RECEIVERS normally using 2 v. accumulator. Complete kit with diagrams and instructions. 49/9 or ready for use 59/6.

**HE-40 DE-LUXE 4 BAND COMMUNICATION RECEIVERS**

220/240 v. 50/60 c.p.s. A.C. mains operation. Frequencies covered 550 Kcs. to 50 Mc/s. continuous. Incorporates 5 in. speaker. Slide rule tuning dial. "S" meter. Internal ferrite aerial for medium wave. Telescopic whip aerial 59 in. 10 section for short waves. Fitted sockets for optional outdoor aerial. Headphones, external speaker socket. Other features are electrical bandspread tuning, 0-100 logging scale. Noise limiter. A.V.C. B.P.O. stand by switch. Size approx. 14 x 8 1/2 x 5 1/2 in. Hand-some grey crackle finished metal cabinet with chromium plating. Brand new with full instructions manual. Usual guarantee.



**HE-30 4 BAND**  
Continuous coverage 550 Kcs. to 30 Mc/s. Illuminated slide rule dial. Edgewise "8" meter. 0-100 logging scale. Built in "Q" multiplier aerial trimmer, electrical bandspread, noise limiter, controls are: Function switch, audio gain, selectivity, frequency (B.F.O.), Band selector, I.P. gain, trimmer, A.V.C., M.V.C. Switch, ANL switch, main tuning, bandspread tuning, controls for h/phones or standard speaker. Provides 1.5 watts output. Size 15 x 10 x 7 1/2 in. For 220/240 v. 50/60 c.p.s. A.C. mains. ex-optional value at. A highly efficient receiver representing

Only 19 Gns. Carriage 7/6. Only £35-0-0 Carriage 10/-

**R.S.C. STEREO/TEN HIGH QUALITY AMPLIFIER KIT**

Valves E281, ECC83, ECC83, EL84, EL84. Separate bass and treble controls giving "cut" and "boost". Sensitivity 50 mV. 5 watts high quality output on each channel. Can be used as straight 10 watt amplifier. Controls: 6/12 v. 3 a. .... 9/9 6/12 v. 4 a. .... 12/3 6/12 v. 5 a. .... 14/6 6/12 v. 6 a. .... 15/6 6/12 v. 10 a. .... 25/9 6/12 v. 15 a. .... 35/9

Stereo/Monaural switch, ganged volume, ganged treble, ganged base and balance. Output for 8 ohms speaker. Point-to-Point wiring diagrams and instructions. Illustration full wiring details and priced parts list 1/9. Or supplied assembled and tested 59/6 extra. Carr. 7/9.

**R.S.C. BATTERY CHARGERS & KITS**

**HEAVY DUTY KIT**  
6/12 v. variable charge rate up to 8 amps. Consisting of Mains Trans. F.W. (Bridge), Selenium Rectifier, 0-7 amp. meter. Variable Charge Selector. Fuses, fuse-holders, panels, plugs and circuit. Only 59/9. Post 4/6.

**TRANSFORMERS**  
200-230-250 v. 50 c/s.  
0-9-15 v. 1 1/2 a. .... 12/9  
0-9-15 v. 2 1/2 a. .... 14/9  
0-9-15 v. 3a. .... 16/9  
0-9-15 v. 5 a. .... 19/9  
0-9-15 v. 6 a. .... 23/9  
0-9-15 v. 8 a. .... 28/9

**BATTERY CHARGER KITS**  
Consisting of Mains Transformer, F.W. Bridge, Metal Rectifier, well ventilated steel case. Fuses, fuse-holders, gram-meters, panels, clips and circuit. Carr. 3/9 extra.  
6 v. or 12 v. 1 amp. .... 22/9  
As above with ammeter .... 25/9  
6 v. or 12 v. 2 amps. .... 25/9  
6 v. or 12 v. 2 amps. .... 25/9  
6 v. or 12 v. 2 amps. .... 35/9 (inclusive of ammeter).  
8 v. or 12 v. 4 amps. with variable charge rate selector and ammeter .... 52/9

**R.S.C. 3 WATT GRAM AMPLIFIER KIT**

All parts to build a compact, highly sensitive amplifier suitable for any single or autochange player. Size 12 x 2 1/2 x 3 1/2 in. Double wound Mains transformer. For 200-250 v. A.C. m.c.p.s. Output for 2-3 ohm speaker. Volume and tone control with switch. 39/9

**SELENIUM RECTIFIERS**

L.T. Types	R.T. Types H.W.
2 1/2 v. 1 a. H.V. .... 1/9	120 v. 40 mA. .... 3/9
6/12 v. 3 a. H.V. .... 2/9	250 v. 50 mA. .... 3/11
Following F.W. (Bridge)	250 v. 60 mA. .... 4/11
6/12 v. 1 a. .... 3/11	250 v. 80 mA. .... 6/11
6/12 v. 2 a. .... 5/9	250 v. 250 mA. .... 11/9
6/12 v. 3 a. .... 9/9	Types Below Contact cooled
6/12 v. 4 a. .... 12/3	250 v. 60 mA. H.W. 5/11
6/12 v. 5 a. .... 14/6	250 v. 70 mA. H.W. 7/11
6/12 v. 6 a. .... 15/6	F.W. (Bridge) Types
6/12 v. 10 a. .... 25/9	250 v. 50 mA. .... 8/11
6/12 v. 15 a. .... 35/9	250 v. 120 mA. .... 10/11

**SPECIAL OFFER HEAVY DUTY 12 v. 10 AMP. KIT**

12 v. 2 amp. F.W. (Bridged) METAL RECTIFIERS 3 for 7/9 Consists of Mains Transformer, F.W. (Bridged) Selenium Rectifier, Ammeter, Fuses, Variable Resistor, and Circuit. For 200-250 v. A.C. mains. Only Carr. 10/-.

**VALVES Full range. Keen prices. CHARGER 0-1 1/2 a., 0-3 a. 8/9 AMMETERS 0-7 a.**

**SENSATIONAL STEREO OFFER**


Complete kit of parts to construct a 3 + 3 watt good quality stereo amplifier providing realistic reproduction. Suitable all stereo pick-up leads. Ganged vol. and tone controls. Pre-set balance. For 200-250v. A.C. mains only. Fully isolated chassis. 4 GNS. Carr. 4/6. Or including Stereo Head 19/9 extra.

**R.S.C. BABY ALARM or INTERCOM UNIT KIT**

For 200-250 v. A.C. mains. Includes all parts, diagrams and instructions. High sensitivity. Completely safe. Controllable at both ends. Housed in two c.a. bins etc. of pleasing 89/6. Carr. 5/- Or assembled and tested 6 GNS.

**DERBY** 20 Osaston Rd., The Spot 14, (Half day Thurs.)  
**BRISTOL** 14, Lower Castle St. (Half day Wed.)  
**LONDON** 238 Edgware Rd., W.2. (Half day Thurs.)  
**EDINBURGH** 133 Leith St. (Half day Wed.)  
**GLASGOW** 326 Argyle St. (Half day Tues.)  
**MIDDLESBROUGH** 106 Newport Rd., (Half day Wed.)  
**DARLINGTON** 13 Post House, Wynd. (Half day Wed.)  
**R.S.C. (MANCHESTER) LTD.**


**R.S.C. A10 30 WATT AMPLIFIER**  
**HIGH FIDELITY**  
**ULTRA LINEAR**  
**PUSH-PULL OUTPUT**



SIX VALVES EP86, EP86, ECC83, 807, 807, GZ34. Tone Control Pre-Amp. stages are incorporated. Sensitivity is extremely high. Only 12 millivolt minimum input is required for full output. THIS ENSURES THE SUITABILITY OF ANY TYPE OR MAKE OF MICROPHONE OR PICK-UP. Separate Bass and Treble controls give both "lift" and "cut" with ample tone correction for long playing records. An extra input with associated volume control is provided so that two separate inputs such as "mike" and gram, etc., can be simultaneously applied for mixing purposes. AN OUTPUT SOCKET WITH PLUG IS INCLUDED FOR SUPPLY OF 300 v. 20mA. and 6.3 v. 1.5 A. FOR A RADIO FEEDER UNIT. Price in kit form with easy to follow wiring diagram.

ONLY 11 Gns. or factory built using latest EL34 output valves and with 12 months' guarantee. 14 GNS. TERMS ON ASSEMBLED UNITS. 10/- DEPOSIT 33/9 and 9 monthly payments of 33/9. Protective Cover 19/9. Type 807 output valves are used with High Quality Sectionally Wound output transformer specially designed for Ultra Linear operation. Negative feedback of 20 D.B. in main loop. CERTIFIED PERFORMANCE FIGURES ARE EQUAL TO MOST EXPENSIVE UNITS AVAILABLE. Frequency response  $\pm 3$  D.B. 30-20,000 c/s. Tone Controls  $\pm 12$  D.B. at 50 c/s.  $\pm 12$  D.B. to  $-6$  D.B. at 12,000 c/s. hum and noise 70 D.B. down. Good quality reliable components used. Chassis finish gold hammer. Overall size 12 x 9 x 9in. approx. Power consumption 150 watts. For A.C. mains 200-250 v. 50 c/s. Output for 3 and 15 ohms speaker. EQUALLY SUITABLE FOR THE CONNOISSEUR OR FOR LARGE Halls, CLUBS OR OUTSIDE FUNCTIONS. ALSO SUITABLE FOR MUSICAL INSTRUMENTS, SUCH AS STRING BASS, ELECTRONIC ORGAN, GUITAR, etc. FOR DANCE BANDS, GARRISON THEATRES, etc., etc. We can supply Microphone, Speakers, etc., at cash prices or on terms with amplifiers. EXPORT ENQUIRIES INVITED.

**R.S.C. A11 12-14 WATT AMPLIFIER**  
**HIGH FIDELITY PUSH-PULL**  
**ULTRA LINEAR OUTPUT**  
**"BUILT-IN" PRE-AMP STAGES**



Two input sockets with associated controls allow mixing of "mike" and gram, as in A10 High sensitivity. Includes 5 valves ECC83, ECC85, EL84, EL84, 2Z81. High Quality sectionally wound output transformer specially designed for Ultra Linear operation. Reliable small condensers of current manufacture. INDIVIDUAL CONTROLS FOR BASS AND TREBLE "Lift" and "Cut". Frequency response  $\pm 3$  D.B. 30-30,000 c/s. Six negative feedback loops. Hum-level 60 D.B. down. ONLY 23 millivolt INPUT required for FULL OUTPUT. Suitable for use with all makes and types of pick-ups and microphones. Comparable with the very best designs.

FOR STANDARD or LONG PLAYING RECORDS. FOR MUSICAL INSTRUMENTS such as STRING BASS, GUITARS, etc. OUTPUT SOCKET with plug provides 300 v. 20 mA. and 6.3 v. 1.5 A. For supply of a RADIO FEEDER UNIT. Size approx. 12 x 9 x 7in. For A.C. mains 200-250 v. 50 c/s. Output for 3 and 15 ohms speakers. Kit is complete to last out. Chassis is fully punched. Full instructions and point-to-point wiring diagrams supplied (or factory 8 Gns. Carr. 10/-). If required louvred metal covers with 2 carrying handles can be supplied for 18/9. TERMS ON ASSEMBLED UNITS. DEPOSIT 24/9 and 9 monthly payments of 24/9. Send S.A.E. for illustrated leaflet of Cabinets, Speakers, "Mikes", etc. Cash or Terms.

**R.S.C. BASS-MAJOR 30 WATT AMPLIFIER**

A Multi-Purpose High Fidelity, High Output Unit for Vocal and instrumental Groups. Incorporating two 12in. heavy duty 25-watt high flux (7,000 lines) loudspeakers with 2in. diameter pole pieces (total flux 220,000 lines). Designed for efficiently handling more than full output of amplifier at frequencies down to 25 c/s. One speaker has an aluminium speech coil and dual cone to extend frequency up to 17,000 c/s. Heavily made cabinet of convenient size 28 x 15 x 13in. has an exceptionally attractive covering in two contrasting tones of Vynair. For 200-250 v. 50 c.p.s. A.C. mains operation. EMINENTLY SUITABLE FOR BASS, LEAD or RHYTHM GUITAR AND ALL OTHER MUSICAL INSTRUMENTS. Four jack socket inputs and two independent vol. controls for simultaneous connection of up to four instrument pick-ups or microphones. Separate bass and treble controls providing more than adequate "Boost" or "Cut" Level frequency response throughout the audible range.

39 1/2 Gns. Carr. 17/6 or DEPOSIT 17/6 and 12 monthly payments of 39 1/2 Gns. Superior to units at twice the cost. Send S.A.E. for illustrated leaflet.

**G.5 AMPLIFIER FOR GUITAR**  
**'MIKE' or GRAM etc.**

6-watt high quality output incorporating high flux 12in. 10 watt, 12,900 line loud-speaker. Sensitivity 30 m.v. High impedance jack input. Handsome strongly made cabinet (size 14 x 4 x 7in. approx.) finished in contrasting shades of Rexine and Vynair. 200-250 A.C. mains operation.

29/19/6 or DEPOSIT 22/3 and nine monthly payments of 22/3. Send S.A.E. for leaflet.

**MICROPHONES** Full range from 12/9. Also Desk & Floor Stands.

**R.S.C. G15 15 WATT AMPLIFIER FOR LEAD OR RHYTHM GUITAR, 'MIKE' GRAM or RADIO**

High-fidelity push-pull output Separate bass and treble "cut" and "boost" controls. Two separately controlled inputs so that two instruments or "mike" and pick-up can be used at the same time. A heavy duty 20 watt high flux 12in. loudspeaker with case chassis is used. Cabinet is well made and finished as G5 Model. Size approx. 18 x 18 x 8in. Send S.A.E. for leaflet.

19 Gns or DEPOSIT 39/11 and 12 monthly payments 33/4. Carr. 10/-



**MANCHESTER**

New large retail premises now open at 60a-60b Oldham Street.

**POWER FANE HIGH FIDELITY SPEAKERS**  
**PACK KITS**

All with exceptionally robust 2in. diameter voice coil assemblies. 12in. 15 ohms. Cast chassis: HEAVY DUTY. 122/10 20 watts ..... 5 gns. 122/10A 20 watts ..... 6 gns. 122/12 20 watts ..... 7 gns. 122/12A 20 watts ..... 8 gns. 122/14 22 watts ..... 9 gns. 122/14A 22 watts ..... 10 gns. 122/17 35 watts ..... £11 17 6 122/17A 25 watts ..... £12 17 6

15in. 15 ohms. Cast chassis: HEAVY DUTY. 152/12 30 w. .... 12 gns. 152/12A 20w. .... 13 gns. 152/14 27w. .... 14 gns. 152/14A 27w. .... 15 gns. 152/17 35w. .... 16 gns. 152/17A 35 w. .... 17 gns.

"A" indicates dual cone type 30-17,000 c.p.s. Send S.A.E. for leaflets. Terms available.

**R.S.C. A5 4-5 Watt HIGH GAIN QUALITY AMPLIFIER**

A highly sensitive 4-valve quality amplifier for the home, small club, etc. Only 50 milli-volts input is required for full output so that it is suitable for use with the latest high fidelity pick-up heads in addition to all other types of pick-ups and practically all makes. Separate Bass and Treble controls are provided. These give full long playing record equalisation. Hum-level is negligible being  $\pm 1$  D.B. down. 15 D.B. negative feedback is used. H.T. of 300 v. 26 mA. and L.T. of 6.3 v. 1.5 A. is available for the supply of a Radio Feeder Unit or Tape Deck pre-amplifier. For A.C. mains input of 200-250 v. 50 c/s. Output for 3-ohms speaker. Chassis is not alloy. Kit is complete in every detail and includes fully punched chassis (with baseplate) with the blue hammer finish and point-to-point wiring diagrams and instructions. Exceptional value at only £4/15/- or assembled ready for use 25/- extra, plus 3/6 carriage. Or deposit 22/- and five monthly payments of 22/- for assembled unit.



**R.S.C. TRANSFORMERS**

Fully Guaranteed, Interleaved and Impregnated

<b>MAINS TRANSFORMERS</b> Primaries 200-250 v. 50 c/s.	
<b>FULLY SHEATHED UPRIGHT MOUNTING.</b>	
250-0-250 v. 60 mA., 6.3 v. 4 a., 0.5-6.3 v. 2 a. 21-3-3in.	17/11
250-0-250 v. 100 mA., 6.3 v. 4 a., 0.5-6.3 v. 3 a.	28/9
300-0-300 v. 100 mA., 6.3 v. 4 a., 0.5-6.3 v. 3 a.	28/9
300-0-300 v. 130 mA., 6.3 v. 4 a. ct., 6.3 v. 1 a. For Mullard 510 Amplifier	35/9
350-0-350 v. 100 mA., 6.3 v. 4 a., 0.5-6.3 v. 3 a.	29/9
350-0-350 v. 150 mA., 6.3 v. 4 a., 0.5-6.3 v. 3 a.	37/9
425-0-425 v. 200 mA., 6.3 v. 4 a., ct., 5 v. 3 a.	57/9
425-0-425 v. 300 mA., 6.3 v. 4 a., 6.3 v. 4 a., 5 v. 3 a.	59/9
425-0-450 v. 350 mA., 6.3 v. 4 a. ct., 6.3 v. 3 a.	69/9
<b>TOP SHEATHED DROP THROUGH TYPE</b>	
250-0-250 v. 70 mA., 6.3 v. 2 a., 0.5-6.3 v. 2 a.	17/9
250-0-250 v. 100 mA., 6.3 v. 3.5 a.	19/9
350-0-250 v. 100 mA., 6.3 v. 2 a., 6.3 v. 1 a.	21/9
350-0-350 v. 80 mA., 6.3 v. 3 a., 0.5-6.3 v. 2 a.	19/9
250-0-250 v. 100 mA., 6.3 v. 4 a., 0.5-6.3 v. 3 a.	27/9
300-0-300 v. 100 mA., 6.3 v. 4 a., 0.5-6.3 v. 3 a.	27/9
300-0-300 v. 130 mA., 6.3 v. 4 a., 0.5-6.3 v. 1 a., suitable for Mullard 510 Amplifier	33/9
350-0-350 v. 100 mA., 6.3 v. 4 a., 0.5-6.3 v. 3 a.	27/9
350-0-350 v. 150 mA., 6.3 v. 4 a., 0.5-6.3 v. 3 a.	35/9
<b>MIDGET CLAMPED PE.</b> Primaries 200-250 v.	
250-0-250 v. 60 mA., 6.3 v. 2 a., 2 x 2 x 2 1/2 in.	12/9
250 v. 60 mA., 6.3 v. 2 a. Size 2 x 2 x 2 1/2 in.	11/9
<b>FILAMENT TRANSFORMERS</b> 12 v. 1 a.	7/9
6.3 v. 1.5 a.	5/9
6.3 v. 3 a.	8/11
6.3 v. 2 a.	17/9
6.3 v. 2 a. or 24 v. 1.5 a.	17/9
<b>AUTO (Step UP/Step DOWN) TRANSFORMERS</b>	
50-80 watts 110-120 v./230-250 v.	13/9
150 watts 110-120 v./200-250 v.	27/9
250 watts 110-120 v./200-250 v.	49/9
<b>OUTPUT TRANSFORMERS</b>	
Midget Battery Pentode 68.1 for 3S4, etc.	4/6
Small Pentode 5,909 $\Omega$ to 3 $\Omega$	4/6
Standard Pentode 5,909 $\Omega$ to 3 $\Omega$	5/9
Standard Pentode 7,009 $\Omega$ to 3 $\Omega$	5/9

**AUDIOTRINE HIGH FIDELITY SPEAKER SYSTEMS**



Designed to provide a smooth frequency response from 40-20,000 c.p.s. consisting of 12in. 12,000 line 15 ohm speaker, Crossover Unit and Tweeter. Highly recommended for use with any High Fidelity Amplifier. 10 Watt Unit £4/19/6 or Deposit 11/3 and nine monthly payments of 11/3. 20 Watt Unit £6/19/9 or Deposit 15/9 and nine monthly payments of 15/9.

G13A MINIATURE 3-WATT GRAM AMPLIFIERS. For 200-250 v. 50 c.p.s. A.C. mains. Overall size only 1 1/2 x 2 1/2 x 4in. Fitted Vol. and Tone Control with mains switch. Designed for use with any kind of single player or record changer unit. Output for 2-3 ohm speaker. Only 5/6/6.

**LOUDSPEAKERS IN CABINETS. 12in. 10 WATT.** Walnut Veneered Cabinet size 15 x 15 x 8in. approx. High quality 12in. 10 watt 12,000 line speaker, 3 ohms or 15 ohms £4/19/6. Carr. 5/-. Or Deposit 11/3 and nine monthly payments 11/3. 12in. 20 WATT. High Quality 15,000 line 1/2 speaker 15 ohms in Cabinet finished as above. Size 18 x 18 x 8in. £7/19/6. Carr. 7/9 or Deposit 17/9 and 9 monthly payments of 17/9.

15in. 30 WATT. Heavy Duty High Flux Speaker. Suitable for BASS GUITAR. Cabinet 24 x 24 x 15in. Heavy construction covered in attractive Rexine and Vynair in two contrasting tones of grey. Only 19/ GNS. Or Deposit 43/- and 12 monthly payments 34/-. Full range of cabinets stocked.

**R.S.C. COLUMN SPEAKERS**

Cabinet finish polished walnut veneer, or two tone Rexine Vynair. Ideal units for vocalists and public address systems. Type C58 20 watt 15 ohms. Fitted five 8in. high flux P.M. Speakers.

12 Gns. Carr. 10/-

Size approx. 42in. x 10in. x 5in. Or Deposit 34/5 and 9 monthly payments of 34/5.


Type C57 as above model but 15 watts rating and incorporating five electrical speakers with an overall size of approx. 26in. x 8in. x 4in. 9 Gns. Carr. 7/6.

Or Deposit 21/- and 9 monthly payments 20/11.



# INTRODUCING THE R.S.C. STEREO/20 HIGH FIDELITY AMPLIFIER

Providing 10/14 WATTS ULTRA LINEAR PUSH-PULL OUTPUT ON EACH CHANNEL

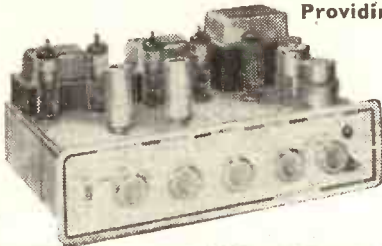

Features include:

- ★ Three-position tone compensation switch.
- ★ Stereo/Mono switch so that peak monaural output of 28 watts can be obtained.
- ★ Separate Bass "Lift" and "cut" and treble "Lift" and "cut" controls.
- ★ Neon panel indicator.
- ★ Handsome Perspex Frontplate.

12 gns. Complete set of parts with point to point wiring diagrams and instructions, or Factory assembled, tested and supplied with our usual 12 months' guarantee for 16 gns. or DEPOSIT 37/9 and nine monthly payments of 37/8. Protective woodgrain cabinet covered in pleasing shade of leathercloth and fitted carrying handles and plastic feet 59/9 extra or DEPOSIT 6/9 and nine monthly payments of 6/9.

SUITABLE for "MIKE", GRAM, RADIO OR TAPE. INTENDED FOR THE HOME OR STUDIO BUT SUITABLE FOR LARGE HALLS OR CLUBS.

Based on a current Mullard design and employing valves ECC83, ECC83, ECL86, ECL86, ECL86, ECL86, EZ81.

Output transformers are high quality sectionally wound to required specification. Output matchings for 3 and 15 ohm speakers on each channel.

FREQUENCY RESPONSE ± 2dB. 30-20,000 c.p.s. HUM LEVEL 65dB down.

SENSITIVITY: 15 millivolts maximum.

HARMONIC DISTORTION (each channel) 0.2%.

For operation on 200/260 v. A.C. Mains.

R.S.C. STANDARD BASS REFLEX CABINET. For 12in. Loudspeakers, acoustically lined and ported. Size 20in. x 14in. x 18in. Beautiful walnut veneer finish. Especially recommended for use with Audiotrine Speaker System. £5/19/6. Set of four legs can be supplied with brass ferrules for 19/6.


AUDIOTRINE CORNER CONSOLE CABINETS. Strongly made. Beautiful polished walnut veneered finish. Pleasing design.

JUNIOR MODEL. To take up to 8in. speaker. Size approx. 20in. x 11in. x 8in. Only 49/9.

STANDARD MODEL. To take up to 10in. speaker. Size 27in. x 18in. x 18in. £4/11/6.

SENIOR MODEL. To take up to 12in. speaker and with Tweeter cut-out. Size approx. 30in. x 16in. x 16in. (Recommended for use with Audiotrine speaker system). 7 Gns. or terms.

W.B. "STENOBIAN" HIGH FIDELITY P.M. SPEAKERS HF1012. 10 watts rating. Where a really good quality speaker at a low price is required, we highly recommend this unit with an amazing performance. £4/12/-. Please state whether 3 ohm or 15 ohm required.



## THE AUDIOTRINE 3D/1

A complete three diaphragm high fidelity loudspeaker unit designed to occupy a minimum of space. Depth is only approx. 6in. Height 24in. Width 16in. This has been made possible by the latest developments in loudspeaker design. The 12in. cast chassis. This unit has a resonant frequency which is extraordinarily low. It has a second diaphragm which extends the frequency range to 17,000 c.p.s. A further speaker operates only on the middle frequencies and ensures a smooth response from 40-17,000 c.p.s. Rating 20 watts. Imp. 15 ohms. Cabinet finish is either polished walnut veneer, or leathercloth to match stereo/20 cabinet. Highly recommended for any Stereo or Mono amplifier. Surely the best value ever at 11 gns.



Or Deposit 25/9 and nine monthly payments of 25/9.

## AUDIOTRINE EQUIPMENT CABINETS

Size 36 x 15 x 18in. Beautiful walnut veneered finish. Elegant contemporary design. Robust construction. Uncluttered removable baseboard. Depth above baseboard 51in. Only 12½ gns. Carr. 15/-. Terms: Dep. 29/9 and 9 monthly pymts. 29/9.



Full range of equipment cabinets available from all branches.

R.S.C. JUNIOR HI-FI REPRODUCER. The very latest Goodmans Axlette 8 High Fidelity loudspeaker (retailing at £6/5/7) fitted in a specially designed Bass Reflex cabinet size 12in. x 18in. x 10in. Acoustically lined and ported and finished in polished walnut veneer. Matching impedance 15 ohms. Frequency range 40-15,000 c.p.s. Power handling 6 watts nominal. Ideal for Stereo. Carr. 4/6. Deposit £1 and 9 monthly payments of £1. £8-19-6

## TRANSISTORISED SOUND MIXER

Enables mixing of up to 4 inputs, i.e. mic, tape, gram, tuner, etc., into single output. Compact and completely self-contained, uses standard 9 v battery. Four standard jack inputs. PRICE 49/6



R.S.C. JUNIOR BASS REFLEX CABINET. Designed for above speaker, but suitable for any good quality 8in. or 10in. speaker. Acoustically lined and ported. Polished walnut veneer finish. Size 18in. x 12in. x 10in. Strongly made. Handsome appearance. Ensures superb reproduction for only £3/19/6. Deposit 9/6 and 9 monthly payments of 9/6.



BRADFORD, BRISTOL, BIRMINGHAM, DERBY, DARLINGTON, EDINBURGH, GLASGOW, HULL, LEICESTER, LEEDS, LIVERPOOL, LONDON, MANCHESTER, MIDDLESBROUGH, SHEFFIELD


PAGES 88 & 89 FOR ADDRESSES

# NO EXCUSES! NO DELAYS! FROM STOCK! VARIABLE VOLTAGE TRANSFORMERS

### PORTABLE



Input 230 v. A.C. Output variable 0-260 v. A.C. at 2.5 a. Fitted in beautifully finished steel case. Complete with volt meter, pilot lamp, fuse, switch, carrying handle, £9/17/6. P. & C. 5/-.



50 AMPS.

INPUT 230 v. A.C. 50/60~ BRAND NEW. Carriage Paid. Buy direct from the importer, keenest prices in the country. All Types (and Spares) from 1 to 50 amp. available from stock.

*0-260 v. at ½ amp.	£2 18 6
*0-260 v. at 1 amp.	£4 10 0
*0-260 v. at 2.5 amps.	£5 17 6
*2.5 amps., Portable	£9 17 6
*0-260 v. at 4 amps.	£8 7 6
*0-260 v. at 5 amps.	£9 0 0
*0-260 v. at 8 amps.	£13 10 0
*0-260 v. at 10 amps.	£17 0 0
*0-260 v. at 12 amps.	£19 10 0
*0-260 v. at 20 amps.	£32 10 0
*0-260 v. at 37.5 amps.	£65 0 0
*0-260 v. at 50 amps.	£85 0 0

\*These instruments are fully shrouded.



INSULATED TERMINALS available in black, red, white, yellow, blue and green. New, 15/- per doz. P. & P. 1/-.

### NEW ½ AMP. FULL RANGE VARIABLE VOLTAGE TRANSFORMER




Input 230 v. A.C. Output continuously variable from 0 to 260 v. at ½ amp. Size: dia. 3in., depth 3½in. including shaft, single hole fixing. Easily built into equipment. Ideal for manufacturers or Lab. use. 58/6.

### 100 WATT POWER RHEOSTATS




50 ohm. 1.4 a., 100 ohm. 1 a., 1,000 ohm. 280 mA., 1,500 ohm. 230 mA. Dia. 3½in. Shaft length ¾in., dia. ½in., 27/6. P. & P. 1/6.

### 1 AMP. OPEN TYPE.




(Type 1A) Compact well constructed unit designed for building into equipment. Panel or rack mounting, extending shaft. Complete with engraved voltage panel and control knob. Input 230 v. A.C. Output variable 0-260 v. Ideally suited for Manufacturers of variable voltage equipment. Price £4/17/6 post paid.

### 1 AMP. VARIABLE OUTPUT UNIT

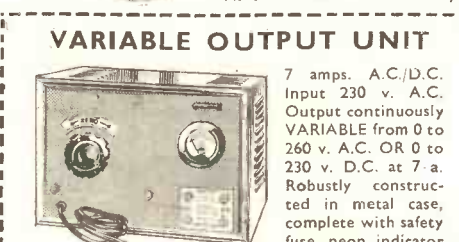

7 amps. A.C./D.C. Input 230 v. A.C. Output continuously VARIABLE from 0 to 260 v. A.C. OR 0 to 230 v. D.C. at 7-a. Robustly constructed in metal case, complete with safety fuse, neon indicator and voltmeter. Size 17 x 12 x 7in. Weight 36lb. Price £34/10/-. Carriage 20/-.

### SLIDER RESISTANCES



1 ohm., 12 amp., 17/6; 1.2 ohm, 14 amp. 27/6; 75 ohm, 2 amp. 37/6; 200 ohm, 1.25 amp. 37/6; 36 ohm, 6.5 to 2.8 amp., tapered winding, geared drive (less knob), 37/6. P. & P. 3/6.

### INSULATION TESTERS (NEW)



Test to I.E.E. Spec. Rugged metal construction, suitable for bench or field work, constant speed clutch. Size: L. 8in., W. 4in., H. 6in. Weight 6lb. 500 volt, 500 megohms. Price £22, carriage paid. 1,000 volts, 1,000 megohms, £28, carriage paid.

# SERVICE TRADING COMPANY

# SERVICE TRADING CO


Postage and Carriage shown below are inland only. For overseas please ask for quotation. We do not issue a catalogue or list.

## ULTRA VIOLET BULBS

Easy to use source of U.V. for dozens of practical and experimental uses.  
12 volt 36 watt A.C./D.C. SBC 6/6. P. & P. 1/-  
12 volt 60 watt A.C./D.C. SBC 8/6. P. & P. 1/-  
Transformer to suit the above. Input 200-240 v. A.C., 12 volt 36 watts, 16/6; P. & P. 2/6. Input 200-240 v. A.C. 12 volt 60 watt, 22/6. P. & P. 3/6.  
Set of 4 Colours FLUORESCENT PAINT. Red, yellow, green and cerise. In 1/2 oz. tins. Ideal for use with the above Ultra Violet Bulbs: 9/6, plus 1/6 P. & P.

## SIEMENS SEALED HIGH SPEED RELAYS

H96A, 2.2 ohm + 2.2 ohm, new 12/6.  
H96B, 50 ohm + 50 ohm, new 12/6.  
H96C, 145 ohm + 145 ohm, new 12/6.  
H96D, 500 ohm + 500 ohm, new 12/6.  
H96F, 1,000 + 1,000 ohm, new 12/6.  
H96E, 1,700 ohm + 1,700 ohm, ex. equip., 16/6. P. & P. 1/- on each Relay.



## CARPENTER'S POLARISED RELAY

Type 5A13 (2), 2 x 7,600 turns at 1,000 ohms. New, 22/6. P. & P. 1/-.  
Type 5A57, 65 ohm coil will operate on less than 5 of a volt. 22/6. P. & P. 1/-.  
Bases for Carpenter Relay, New, 3/6 each.

## P.O. RELAYS, Type 3,000

200 ohm, 6 c/o. 6,500 ohm, 1 c/o. 1 break.  
500 ohm, 6 c/o. 16,000 ohm, 2 make 2 break.  
500 ohm, 4 Heavy Duty Make.  
2,000 ohm, 4 make 4 break.  
All at 12/6 each, plus 1/- P. & P.

## G.E.C. SEALED RELAYS

M1069 5,000 ohm, 2 c/o. M1084 180 ohm, 4 c/o.  
M1092 670 ohm, 4 c/o. M1095 670 ohm, 2 m. 2 b.  
M1100 670 ohm, 2 c/o. Ex new equipment.  
All at 12/6 each, plus 1/- P. & P.

**7,000 OHM SEALED RELAY.** High Speed single c/o. Platinum contacts. Super-sensitive, ideal for Transistor circuitry. Will operate on 1 milliamp. 25/- P. & P. 1/-.

## SPECIAL REVERSING 24-VOLT D.C. MOTOR 2-AMPERE

Quadrant moves 90 degrees with limit switches. Ideal for opening doors, etc. Price 32/6. P. & P. 3/-.

**SOLENOID.** Overall length 3 1/2 in.; stroke 1/2 in. to 1 in. Maximum push 8 oz. 12-24 v. D.C. operation. D.C. resistance 35 ohm. Price 8/6. P. & P. 1/6.

**EVERSHED AND VIGNOLES BRIDGE MEGGER.** 500-v. Constant Pressure Series 2 with decade and varley Joop facilities, perfect condition, £40 including leather case and carriage.

**SOLENOID OPERATED MAGNETIC RELAY.** Type Sc/3944, 4 Pole c/o., 10 amp. Contacts, 24 volt D.C. operation. 12/6 each. P. & P. 1/6.

**EVERSHED AND VIGNOLES MEGGER CIRCUIT TESTER.** (Low reading ohm meter.) 2 ranges, 0-3, 0-30 ohms. Complete with test leads, battery and leather carrying case, £6/6/- Post paid.

## VENNER 14 DAY CLOCKWORK TIME SWITCHES

5 amp. 230 v. contacts. 24 hr. phase, 1/2 hr. divisions allows setting for 1 make, 1 break, every 24 hrs. Complete with key and mounting block. Used but guaranteed. 35/6. P. & P. 2/6.

**RESETTABLE HIGH SPEED COUNTER.** 3 figure, 1,500 ohm coil, 40-50 v. D.C. operation. Brand new, 50/- each, plus 1/6 P. & P.

**EX P.O. MAGNETIC COUNTER (old type),** either 500 ohms for 24 volt operation or 3 ohms for 6 volt D.C. operation. 4 figures to 9,999. Price, either type, 8/6. P. & P. 1/6.

**LATEST HIGH SPEED MAGNETIC COUNTERS.** 4 figure, 10 impulses per second. Type 100D, 4.1 ohm coil, 3-6 v. D.C. operation. Type 100A, 500 ohm coil, 18-24 v. D.C. operation. Type 100B, 2,300 ohm coil, 36-48 v. D.C. operation. Any type 12/6 each, plus 1/6 P. & P.


**DIALS FOR AUTOMATIC TELEPHONES,** used but good condition, 12/6 ea., plus 2/6 P. & P.

**CROMPTON PARKINSON BRAND NEW 1/2 h.p. MOTORS.** 230/250 VOLT A.C. 1,400 R.P.M. Fitted with 2 1/2 x 3/4 in. SPINDLE. Price £3/15/-. Carriage 8/6.

**HIGH SPEED BLOWER UNIT** 200/250 volt A.C. Powerful 2-speed motor, 11,000 and 13,000 R.P.M. 17/6, plus P. & P. 2/6

**AUTO TRANSFORMERS.** Step up, step down. 110-200-220-240 v. Fully shrouded. New. 300 watt type £2/6/6 each. P. & P. 2/6. 500 watt type £3/7/6 each. P. & P. 3/9. 1,000 watt type £4/10/- each. P. & P. 6/6.

## TYPE 34R SILICON SOLAR CELL



Four .5 volt units series connected in high impact polystyrene case, flying lead connections. Specially designed

diffusing lens system to ensure maximum light pickup. Output-up to 2 v., in bright sunlight. Wider spectral response, and thirty times the efficiency of selenium cells. As used to power earth satellites! 37/6, and 1/- P. & P.

**230 v. A.C. RELAY.** 10,000 ohm coil, 3 changeover, 5 amp. non inductive load. Price 18/6, plus 1/6 P. & P.

**230 VOLT A.C. GEARED MOTORS** Type D16G 5 r.p.m. 1.7lb. inch £2/9/6. P. & P. 2/6. Type D16G 13 r.p.m. 1.45lb. inch £2/12/6. P. & P. 2/6.

**230 Volt AC** 50 c/s. 5-figure Veeder-Root Counter (not resettable). New. Boxed. 19/6, plus 2/6 P. & P.

## MINIATURE UNISELECTOR SWITCH


3 banks of 11 positions, plus homing bank. 40 ohm coil. 24 36 v. operation. Ex equip. Individually tested. 22/6, plus 2/6 P. & P.

**20-way STRIP** containing standard Post Office telephone Jack, Sockets, overall size 11 x 3 1/2 x 1/2 in. New. Price 15/- each. P. & P. 1/6.

## LIGHT SENSITIVE SWITCH

Kit and parts including ORP.12 Cadmium Sulphide Photo cell, Relay, Transistor and Circuit. Now supplied with new Siemens High Speed Relay for 6 or 12 volt operation. Price 25/-, plus 2/6 P. & P.  
ORP.12 and Circuit 10/6, post paid.

**SEMI-AUTOMATIC "BUG" SUPER SPEED MORSE KEY.** 7 adjustments, precision tooled, speed adjustable, 10 w.p.m. to as high as desired. Weight 2 1/2 lb. Price £4/12/6, post paid.



**KEYING LEVER.** Especially designed for use with all types of electronic keys. Fully adjustable micro-switch action, no contact bounce, precision made, finely polished parts, screw down base. Price £4/4/-, post paid.

**TRANSISTORISED FULLY AUTOMATIC ELECTRONIC KEYS.** 230 v. A.C. for Battery operated. Incorporates built-in motor Oscillator, Speaker, and Keying Lever. Adjustable speeds. Keying either auto., semi-auto. or hold. 4 diodes. 7 transistors. Price £16/10/-, plus 4/6 P. & P.



**TRANSISTORISED MORSE OSCILLATOR** Fitted 2 1/2 in. Moving Coil Speaker. Uses type PP3 or equiv. 9 v. battery. Complete with latest design Morse Key, 22/6, plus 1/6 P. & P.

**BOMBSIGHT COMPUTER, Type T.I.A.** Contains hundreds of precision gears plus infinitely variable resolving gears, worm drives, 1/2 repeater motor, 4 areonid barometers, D.C. motors, gyro unit, rev. counters, etc. As new, £3/12/6 plus 7/6 carriage (rail).

1st grade	TRANSISTORS	Brand new
OC29	18/-	OC203 14/-
OC41	7/-	Get 104 6/-
OC45	5/-	Get 105 6/-
OC71*	5/-	Get 573 12/6
OC72*	7/-	2N706A 17/6
OC73	6/-	2N458 20/-
OC75	7/-	2S019 30/-
OC76	6/-	5B345 30/-
OC81*	3/-	TK20B 4/-
OC84*	10/6	AC107 14/6
OC139	12/-	AF114 11/-
OC140	19/-	AF115 10/-
OC171	10/6	AF116 10/-
OC201	21/-	AF117 9/6
		BCZ11 10/-

\*Available in Matched Pairs.

DIODES		
OA91	3/-	1S111 4/-
SX781	4/-	ZS10B 3/-

**ZENERS 5%**  
All 1/2 watt 5% at 10/- each, 4.3 v., 4.7 v., 5.1 v., 5.6 v., 6.2 v., 6.8 v., 7.5 v., 8.2 v., 9.1 v., 10 v., 12 v., 15 v., 16 v., 22 v.

**HEAVY DUTY L.T. TRANSFORMER**  
Very conservatively rated for continuous duty. Input 110-260 volts, multi tapped, 50 cycles, single phase. Output 28, 29, 30, 31 volts at 21 amp. Price £6/15/- Carr. 10/-

**L.T. TRANSFORMER**  
Type 1. Pri. 200-240 sec. tapped 30, 32, 34, 36 volt at 5 amp. 57/6. P. & P. 4/-

Type 2. Pri. 240, sec. tapped 30, 40 and 50 volt at 5 amp. £4/15/-. P. & P. 4/-

Type 3. Pri. 200-240, sec. tapped 10, 17 and 18 volt at 10 amp. 57/6. P. & P. 4/-

Type 4. Pri. 240, sec. tapped 6 and 12 volt at 20 amp., 72/6. P. & P. 5/-

**A.C. AMMETERS**  
0-1, 0-5, 0-10, 0-15, 0-20 amp. F.R. 2 1/2 in. dia. All at 21/- each.

A.C. VOLTMETERS		
0-15 v. A.C. M.I. 2 1/2 in. F.L.		12/6
0-200 v. A.C. Rect. M-Coil 3 1/2 in. Type W23		45/-
0-300 v. A.C. M.I. 2 1/2 in. F.L.		22/6
0-300 v. A.C. Rect. M-Coil 2 1/2 in.		29/-
0-300 v. A.C. Rect. M-Coil 3 1/2 in. Type W23		55/-

D.C. AMMETERS		
0-15 amp. D.C. M-Coil 2 in. Rnd.		12/6
0-5 amp. D.C. M.I. 2 1/2 in. Rnd.		11/6
0-500 microamp. sub-min. 1 1/2 in. dia. Scaled 0-1 milliamp.		21/-

Postage extra.  
**OIL-FILLED CONDENSER.** 240 mfd. for 230 v. A.C. or 600 v. D.C. Overall size 1 1/4 in. x 9 in. x 5 1/2 in. plus feet. Weight 46 lb. Brand new. Guaranteed perfect. Manufacturer's packing. Price £7/10/- Carriage 10/-

**VAN DE GRAFF ELECTRO-STATIC GENERATOR,** fitted with motor drive for 230 v. A.C. giving a potential of approx. 50,000 volts. Supplied absolutely complete, including accessories for carrying out a number of interesting experiments, and full instructions. This instrument is completely safe, and ideally suited for School demonstrations. Price £6/6/- plus 4/- P. & P. Leaflet on request.

**4 DIAL DECADE RESISTANCE BOX**  
Range 0-11, 110 Ohm. Xi Wire Wound, Max. current 300 mA. X 10 Wire Wound, Max. current 150 mA. X100, X 1,000.



High Stability Resistors, rated 1 watt. Accuracy ±1% Switches, make before break type, fitted with low resistance silver plated contacts, polished wood case, new, price £10/10/-, plus 6/6 P. & P.

## BUILD AN EFFICIENT STROBE UNIT FOR ONLY "37/6"

The ideal instrument for workshop, lab. or factory. This wonderful device enables you to "freeze" motion and examine moving-parts as if stationary. We supply a simple circuit diagram and all electrical parts, including the NSP2 Strobe tube which will enable you to easily and quickly construct a unit for infinite variety of speeds, from 1 flash in several seconds to several thousands per minute. New, modified circuits bring price down to 37/6, plus 3/- P. & P.

**NSP2 CV2296 STROBOTRON FLASH TUBE** made by Ferranti, brand new, I.O. base. Price 15/- P. & P. 1/-.

ALL MAIL ORDERS. ALSO CALLERS AT:  
47-49 HIGH STREET, KINGSTON-ON-THAMES.  
Telephone: KINGSTON 9450.  
Closed Saturdays.

PERSONAL CALLERS ONLY: 9 LITTLE NEWPORT STREET, LONDON, W.C.2. Tel.: GER. 0576.  
(OFF LEICESTER SQUARE)  
Open till 1 p.m. Thursday and all day Saturday.

# FIRST AND BEST ALL TRANSISTOR PROVED AND TESTED DESIGNS BRITISH MADE—QUALITY COMPONENTS & UNITS

● AFTER-SALES SERVICE AND GUARANTEE FOR ALL MODELS ●

## TRANSISTOR HIGH FIDELITY EQUIPMENT FOR MAINS OR BATTERY OPERATION CALL IN FOR DEMONSTRATION

### ● MONO-FULL FUNCTION PREAMPLIFIER/ CONTROL UNIT

PRICE **£5-10-0** p.p. 2/-  
(or KIT 99/6, p.p. 2/-).

★ Dark brown and gold front panel plate 8/6.



For use with transistor power amplifiers as below or valve amplifiers—hum-free—high sensitivity—8 inputs between 1.5 mV, and 300 mV., with full equalisation. For all pickups—microphones, tuners, tape replay. Separate treble and bass with cut and boost—4 position low pass filter. Volume control, etc. Response within 3dB, 30 c/s to 20 kc/s. Output 250 mV. Overall size 9 x 2½ x 2in. Battery operated (2½ mA.) or from power supply. Signal to noise ratio 70 db at 10 watts with power amplifier. Supplied built and ready to use or as a Kit. Attractive appearance and high performance. Can be used to feed one or two Power Amplifiers.

### ● INTEGRATED STEREO PREAMPLIFIER



PRICE **£10-19-6** p.p. 3/6.

Two channel version of above with addition of balance and mono/stereo controls. Overall size 9 x 3½ x 1½in. deep. Designed to feed two 10 watt power amplifiers as below. Supplied built and ready to use. Battery-operated (5 mA) or from power supply.

★ Dark brown and gold front panel plate 12/6.

### ● MULTI-INPUT PREAMPLIFIER

For use with any of the transistor power amplifiers or as a general purpose preamp. A simplified version of the full function preamp. 8 inputs from 1.5 mV. to 300 mV. Input selector, tone and volume controls. Size 5 x 2½ x 2in. Ideal for public address systems for microphones and pickups. Suitable to feed one or two Amplifiers.

PRICE **65/-** p.p. 1/6.



★ Dark brown and gold front panel plate 6/6.


### ● 10 WATT POWER AMPLIFIERS

(Peak output 20 watts.)  
★ 15 ohm 10 watt 40 volt supply.

**£5-19-6** p.p. 2/6  
(or Kit £5/10/0 p.p. 2/6).

★ 3 ohm 10 watt 24 volt supply

**£5-10-0** p.p. 2/6  
(or Kit 99/6, p.p. 2/6).

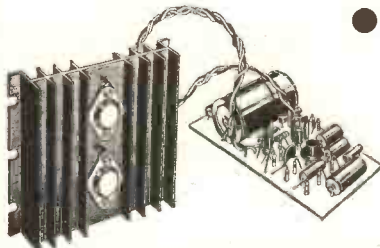

Direct coupled transformerless design. Sensitivity 100 mV. from 10 K ohm (or less) for 10 watts output. Response ± 1 db. 40 c/s. to 20 c/s. 0.25% total distortion at 10 watts. Push-pull class B output. 60 db. feedback. Available for 3/4 ohm and 15/16 ohm output. 20 watts peak music power output per channel. Battery or mains supply operation. For use with mono or stereo preamplifiers as above. Supplied built and ready to use. Or in Kit form.

### ● MAINS POWER PACKS

For Single amplifiers, 59/6.  
For Two amplifiers, 69/6.

**GUARANTEED HIGH PERFORMANCE  
LOW NOISE—QUALITY DESIGNS**

★ CALL FOR DEMONSTRATION ★

DETAILS WITH  
CIRCUITS OF  
ABOVE UNITS  
ON REQUEST

We can supply from stock most of the components and items specified on circuits published in this and other magazines. Quality parts at realistic prices. Let us quote for your circuit.

**300** TRANSISTOR TYPES, DIODES, RECTIFIERS  
**800** VALVES AND TUBES  
**500** QUARTZ CRYSTALS  
ALL FROM STOCK

### ● ALL TRANSISTOR CAR RADIO ●

#### ● 1 HOUR TO BUILD WITH PRE-ASSEMBLED CHASSIS AND PANELS

6-Transistor 3-diode med. and long wave superhet design. Features double tuned IFTS, AVC, permeability tuning with geared drive. Push-pull car filling volume. Full tuning on both wavebands. A high sensitivity printed circuit professional design to fit any type of vehicle. Case size 7 x 4 x 2in. For 12 volt positive earth or dry battery. All parts available separately. After sales service and guarantee.



THE "ROADSTER"  
● TOTAL COST TO BUILD

**£8.19.6** P.P. 3/6

● 7 x 4in. Hi-Flux speaker with baffle and car fixing kit 20/-  
★ CIRCUIT AND DETAILS ON REQUEST.

### ● VHF FM TRANSISTOR TUNER ●

High stability—Low noise—High sensitivity—New Low Price.

★ 5 Mullard Transistors and 4 Diodes.

★ 87 to 105 mc/s full coverage.

★ 1 Volt output.

Printed circuit design of high sensitivity and quality. Output for valve or transistor amplifiers. Geared tuning. Size 3½ x 2½ x 4in. Simplified building instructions. Operates from 9 volts 9/10 mA. All parts sold separately. Complete with dark brown and gold panel plate.



TOTAL **£6-19-6** p.p. 2/6  
COST (Cabinet assembly 20/- extra).

Circuit Book on Request.

### ● "CONVAIR" TRANSISTOR PUSH-BUTTON PORTABLE CAR RADIO ●

● The easiest to build, the most sensitive, clearest output, high selectivity. Guaranteed the best available.

● New printed circuit 6-transistor superhet design. Over 700 mW push-pull output.

● Push-button selection of MW and LW with full tuning on both wavebands.

● Features Mullard Transistors, Double tuned IFTs, Geared Tuning, Hi-Flux Speaker, etc.

● New attractively designed portable cabinet with horizontal tuning and all stations marked.



Total cost of ALL Parts

**£7-19-6** p.p. 3/6.

(Batteries 6/- extra).

ALL PARTS SOLD SEPARATELY. SIZE 10 x 7 x 3½in.

### ● TRANSISTOR PACKAGED AMPLIFIERS ●


● 6-Transistor printed circuit designs. Push-pull output for 3 to 5 ohm speakers. Can be battery operated. 6mV. into 1 K ohm sensitivity. Response 40 c/s to 15 kc/s. Can be used with above preamplifiers for mono or stereo in any application requiring a low distortion low cost amplifier.

OVERALL SIZES 2½ x 2 x 1½ inches.

● 4 watt version operates PRICE BUILT **79/6** P.P. 1/6  
from 12 to 18 volts.

● 1½ watt version operates PRICE BUILT **65/-** P.P. 1/6  
from 9 to 12 volts.

★ CIRCUITS AND DETAILS ON REQUEST ★



### NEW! "REGENT-6" MEDIUM AND LONG WAVE POCKET SUPERHET RADIO

A new 6-transistor printed circuit design with fully geared tuning on both wavebands. Push-pull "Clear-tone" output. Two tone moulded cabinet size 5in. x 3in. x 1½in. Easy to build. All parts sold separately. (Available mid-Jan.)

Total cost to build **85/-** P.P. 2/-  
CIRCUIT AND DETAILS ON REQUEST (Battery 2/6 extra.)

**NEW CATALOGUE**  
90 PAGES, 10 x 7½in.  
Fully detailed and illustrated.  
Price 2/6 post paid.  
FIFTH EDITION NOW READY  
More Bargains. Price Reductions.

**HENRY'S RADIO LTD.**  
303 EDGWARE RD., LONDON W2  
PADdington 1008/9  
Open Mon. to Sat. 9-6. Thurs. 1 p.m.



# TRANSISTORS, CRYSTALS, VALVES AND COMPONENTS


THE LARGEST RANGE OF COMPONENTS IN THE COUNTRY

Quotations at competitive prices by return of post. New 90 page full catalogue 2/6 Post paid. Trade and Export enquiries invited.

## PORTABLE GEIGER COUNTERS FOR MEASUREMENT OF RADIO-ACTIVITY

offered at a fraction of cost • Supplied with G5H Tube, for testing Gamma radiation. Supplied complete with instructions, haversack, cables and probe.

**£7.10.0** p.p. 19/-  
(Batteries 50/- extra)

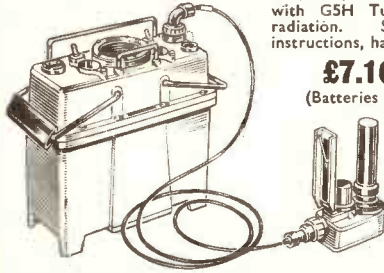

**BRAND NEW**  
**M18 Tube for Beta**  
**Radiation measurement for liquids 22/6 extra.**

## BUILD A QUALITY TAPE RECORDER

Available in 2 or 4 track versions.

★ Pre-Built Equipment—6 Valves—Collaro Studio Decks—Portable Cabinets with Speakers.  
★ **TWO TRACK PACKAGED DEAL** **£26** p.p. 8/6.

OR Deck 10 gns. P.P. 5/-; Amplifier 11 gns. P.P. 3/6. Cabinet with Speaker 5 gns. P.P. 3/6.

★ **FOUR TRACK PACKAGE** **£30** p.p. 8/6.

OR Deck £13/19/6. P.P. 5/-; Amplifier 12 gns. P.P. 5/6. And Cabinet with Speaker 5 gns. P.P. 3/6.



All complete in every detail. Illustrated leaflets on request. Ideal for portable or domestic equipment.

## SINCLAIR X10 AMPLIFIERS

Kit or built in stock. MICRO-6, TR750, MICROAMP, SLIMLINE, INJECTOR available from stock.

## FM VHF TUNING HEART

Printed circuit construction. RF stage and osc./mixer stage, fully tunable 85 to 105 Mc/s. Completely screened. Requires UCC85 (8/6). Brand new in maker's cartons 15/- P.P. 1/-.

SUPPLIED WITH CIRCUIT



## MULTIMETERS

Multi-range test meters featuring easy to read scales and provided with full operating instructions, lead and batteries. Suitable for amateurs, designers, repair shops, all domestic uses. Full details and specification in our catalogue.


- ★ PT34, 1kΩ/V ..... £1 19 6
- ★ M1, 2kΩ/V ..... £2 9 6
- ★ THL33, 2kΩ/V (illus.) ..... £3 15 0
- ★ EP10K, 10kΩ/V\* ..... £3 19 6
- ★ ITI-2, 20kΩ/V ..... £4 9 6
- ★ TP55, 20kΩ/V\* ..... £5 19 6
- ★ EP30K, 30kΩ/V\* ..... £6 10 0
- ★ 500, 30kΩ/V\* ..... £8 19 6
- ★ EP50K, 50kΩ/V\* ..... £9 10 0
- ★ EP100K, 100kΩ/V ..... £10 19 6

(\*Leather Cases Available)

## A SELECTION FROM OUR STOCKS

See Catalogue for full details.

### RECORD/REPLAY/ERASE TAPE HEADS




Marriot Type R/RP/3 ½ track record-replay head and Mullard type TS erase head with mounting post. Impedance 700 ohms at 1Kc/s. Ideal for transistor circuits. Bargain Offer. 15/- Pair.

- Sinclair Micro-6 (to build) ..... 59/6
- Sinclair TR750 Amplifier (to build) ..... 39/6
- Sinclair Micro Injector (to build) ..... 27/6
- Sinclair 10 watt 9 trans. Amp. Kit ..... 25-19-6
- Sinclair 10 watt 9 trans. Amp. Kit, built ..... 26-19-6
- Tape Jack Tuner (Full Med. Wave) ..... 29/6
- 10-Watt Horn Tweeter CT10 ..... 27/6
- 20-Watt Super Tweeter CT20 ..... 69/6
- Two-channel Mixer for Mics/Pus ..... 15/-
- 1 to 200 Mc/s. Field/str. Meter ..... 59/6
- 5-hole Chassis Punch Kit ..... 49/6
- Headphones 2k Ω 12/8; 4k Ω ..... 14/6
- Stereo Stethoscope Headset 8 + 8 arm ..... 25/-
- Resistor Substitution Box ..... 32/6
- Crystal Mono Stethoscope Headset ..... 10/6
- Magnetic Mono Stethoscope Headset ..... 12/6
- Transistor Signal Injector ..... 35/-
- 4-channel Transistor Mixer ..... 49/6
- Fully Disappearing Car Aerial ..... 35/-
- Test Lead Kit with Pouch ..... 9/6
- Capacitor Substitution Box ..... 22/6
- De Luxe Stereo Headsets with junction box ..... 26
- PP3 9V Batt. Eliminator ..... 18/6
- Transistor Telephone Amplifier ..... 59/6
- 8 + 8Ω Stereo Headphones ..... 69/6
- V.T.M. Valve Voltmeter ..... £13-19-6
- 100 Mc/s. RF Probe for above ..... £2-2-0
- Crystal Contact Microphone ..... 12/6
- 2k Ω ½ track Tape Head ..... 15/-
- 2k Ω In. diam. Mag. Mic. insert ..... 15/-
- M31 Crystal Mic. insert ..... 5/-
- Earphones, Crystal or Magnetic ..... 5/-
- Complete with Jack and Socket ..... 9/6
- Telephone Recording Attachment ..... 25/-
- 50-0-50μA Edgewise Meter ..... 12/6
- 6/12V Min. 272w 675 ohm Relay ..... 20/-
- Transistor Coil Set with Tuner, Ferrite Aerial and Circuit ..... 14/6
- 30W Pocket Mains Solder Iron ..... 69/6
- 8in. Hi-Fi 15/16 ohm Speaker ..... 15/-
- 100 Kc/s Quartz Crystal ..... 22/6
- Twin Crystal 1 Mc/s. and 100 kc/s ..... 72/6
- 3 Transistor mW Superhet Tuner

**WIRELESS WORLD 10-TRANSISTOR CRYSTAL CONTROLLED FM TUNER** All parts in stock. Total cost £8/19/6. P.P. 2/-. Complete with printed circuit and layout diagram. (Set of 3 crystals 80/- extra). All parts sold separately—List on request.

## MAINS AND BATTERY RECORD PLAYER DECKS


Complete with arm and cartridge. Brand new, fully guaranteed.



- ★ BSR UA14 4-speed Auto. .... £5 19 6
- ★ BSR UA15 4-speed Auto. .... £5 19 6
- ★ Garrard Autoslim, unpluggable head, Auto. .... £6 19 6
- or Stereo Version, Auto. .... £7 19 6
- ★ SRP10 4-speed or BSRGU7 ..... £5 0 0
- ★ Garrard Decadeck with Deram ..... 15 Gns.
- ★ Garrard AT6 with Stereo Cartridge, 4-speed Auto. .... £10 19 6
- ★ AT6 with EV26 or Sonotone head... £11 19 6
- ★ AT6 with Mono head, Auto. .... £10 10 0
- P. & P. 3/6 any type above
- ★ 9 volt Star, 45 r.p.m. .... £1 19 6
- ★ 45 and 33 r.p.m. Star, 9V ..... £4 12 6
- ★ 45 r.p.m. Garrard 6V ..... £1 15 0
- ★ SRP10 4-speed 9 volt ..... £6 5 0
- ★ 4-speed B.S.R. GU7, 9V ..... £5 5 0
- ★ Autoslim 6/9 volt Autochanger ..... £8 19 6
- P. & P. 2/6 any of above.

## COLLARO-STUDIO TRANSCRIBOR TAPE DECKS

Brand new, fully guaranteed.



- ★ **TWO 10 TRACK** Gns.
- ★ **FOUR TRACK** **£13.19.6** Post and packing 5/- either type

## QUALITY MICROPHONES

Large range of magnetic and crystal microphones in stock from 8/6. (See Catalogue for full range)

- 100c Crystal stick with Stand ..... £1 2 6
- BM3 Crystal stick with Stand ..... £2 9 6
- MC70 Crystal Studio ..... £2 2 0
- DM16HL Dual impedance ..... £4 2 6
- DM17HL Dual impedance stick ..... £4 2 6
- Adjustable Table Stand (P.P. 2/-) ..... £1 9 6
- FS3 Telescopic Floor Stand (P.P. 3/6) £2/17/6

Cintel All Transistor Counter up to 1 Mc/s. PRICE £125

## QUARTZ CRYSTALS

- 100 Kc/s. 3 Pin 15/-
  - 500 Kc/s. 2 Pin ... 15/-
  - 455 Kc/s. (AR88) 12/6
  - HRO 456 Kc/s.... 15/-
  - 5,000 Kc/s. 2 Pin 10/-
  - 10 Mc/s. 2 Pin..... 15/-
  - 27.255 Mc/s. Radio Control ..... 15/-
  - 1 Mc/s Crystal..... 25/-
  - Twin Crystal
  - 100 kc/s. & 1 mc/s 22/6
- Over 600 frequencies in stock. Latest crystal lists free on request.

## ZENER REFERENCE DIODES

- ★ IN430 8 to 8.8 volt, 0.2% stability from -55°C to +100°C 45/- each.
- ★ IN249 5.9 to 6.4 volt, 1% stability from -55°C to +100°C 15/- each.

- GS10CS Dektron Display Tubes 25/- Base 2/- GS12C Tube 25/-.
  - 931A Photomultipliers, 60/-, with base.
  - 89D (CV2193) Double Beam Scope Tube 59/6.
  - O9D (CV1596) 59/6.
- Large range of special purpose types in stock.

## CATHODEON MINIATURE CRYSTAL OVEN

6 or 12 volt A.C./D.C. 80°C. for HC6U or 2M crystals. Brand new. 22/6.



**Henry's Radio Ltd.**  
303 EDGWARE ROAD, LONDON, W.2.

PADdington 1008/9  
Open Monday to Sat. 9-6. Thurs. 1 o'clock


# PROOPS Walk-around Store

## and MAIL ORDER SERVICE

52 Tottenham Court Road, London, W.1. • Open 9-6, including Sats., Thurs. 9-1 • LAngham 0141

### CAPACITANCE SUBSTITUTION BOX

Compact unit providing a directly switched accurate selection of 9 capacitors: 0.0001, 0.0022, 0.0047, 0.01, 0.022, 0.047, 0.1 and 0.22. Capacitance rating 500 v.w. case size 4 1/2 in. x 2 1/2 in. x 1 1/2 in. Fitted with 36 in. red and black test leads with shrouded alligator clips.



25/- Post & Packing 2/6.

### RESISTANCE SUBSTITUTION BOX




Two switched ranges providing instant selection of any of 24 accurately chosen resistors. Low range 15 ohms to 10 kilohms (1 watt rating). High 15 kilohms to 10 megohms (1-watt rating). 36 in. red and black test leads with alligator clips. In totally-enclosed attractively finished case size 4 1/2 in. x 2 1/2 in. x 1 1/2 in.

32/6 Post & Packing 2/6

### MAINS OPERATED WATER COCK

Provides instant, remote flow control




Superbly engineered, solenoid actuated flow control valve for standard 200/250 volts, 50 cycles A.C. operation. Solenoid is contained in insulated cylindrical housing and completely isolated from valve mechanism by rubber diaphragm. Valve base is heavy cast brass, having plain tube outlet and fitted with debris filter and rotatable, angled inlet pipe. Unit makes an excellent, ready-made device to use as a basis for automatic watering and humidity controls, flow measurement, dispensing and automatic washing machines, remote operated taps, etc. Size overall 4 1/2 in. x 1 1/2 in. x 3 1/2 in. high. Fitted 1/2 in. O.D. inlet and outlet. Brand new. Fully guaranteed.

15/- Pkg. 2/6

### FULL 1/4-H.P. MAINS MOTORS

Continuously rated, silent running




Famous make Newman motors with fantastic starting torque and giving full 1/4-h.p. output. Can be readily installed for vertical or horizontal operation; and will make an excellent drive unit for bench saws, compressors, lathes, planes, lawn mowers, and other light machinery. Heavy welded steel construction with robust diecast end frames and conforming to B.S.170. Smooth, silent operation with output speed of 1,425 r.p.m. automatically regulated by centrifugal switch. Size overall 6 in. diam. x 8 1/2 in. long plus 1/2 in. diam. x threaded end. Flange mounting is to 3 equally spaced lugs with mounting holes pitched on 3/4 in. diam. circle. For 230/250 volts, 50 cycles, A.C. mains. Consumption 2 1/2 amps. Excellent, never used condition. Fully guaranteed. Offered at a fraction of cost.

65/- Carriage 7/6.

### D.C. GYRO AND SERVO MOTOR—C1


Beautifully engineered Minneapolis-Honeywell precision gyro, totally enclosed in scaled light-alloy housing about 8 1/2 in. cube. Automatic erection and precision correction. Large diameter Desynn type transmitting potentiometers provide signals corresponding to the magnitude of the deviation of gimbal arms. Powerful D.C. servo motor coupled through a differential reduction gear to a 4 in. spur driving gear integral with a 3 in. diam. spiral groove cable driving drum. Two magnetic solenoid clutches and corresponding brakes hold drum rigidly in position or set free for "neutral." Nominally for 26-volt operation, but operates at 12 volts. Size 10 in. x 6 in. x 8 in.



£10 each unit or £17/10/0 pair Carriage 10/-

### TYPE 201 INVERTOR

Input 25-28 v. D.C., output 115 v. 1600 c/s. A.C. at 1,750 VA. Speed 8,000 r.p.m. P.F.1. Completes with integral frequency and voltage control. Unit size overall 16 in. x 8 in. x 12 in. high. In excellent guaranteed condition.



£15 Carr. 10/-.

### MINIATURE MICRO SWITCH

Single pole, two-way, extremely sensitive micro-switch by Bulgin. Size overall only 1 1/2 in. x 3/4 in. Rated 1 amp. at 250 volts A.C. Fixing holes located at corners of switch.

2 for 5/- Post 1/-

### SEMI-CONDUCTOR MODULES

Ice cube size encapsulated circuits


Solid state semi-conductor modules—fully transistorized and completely wired and tested circuits that only require a 6-volt battery and connection to input and output to provide a compact ready-made unit. Encapsulated types are shock-proof and almost indestructible. Supplied with instructions. PUBLIC ADDRESS AMPLIFIER—needs only carbon microphone and any speaker. Frequency response designed to provide maximum intelligibility. With 15 in. speaker sound covers hundreds of yards. Fully encapsulated. Size only 1 1/2 in. x 1 1/2 in. x 1 1/2 in. 22/6. P. & P. 1/- METRONOME—requires only 2 megohm potentiometer and any P.M. speaker to produce accurate repetitive beats at adjustable rates from 40 to more than 208 beats per minute. Low battery drain: simple connections. 22/6. P. & P. 1/- 2-WATT GRAM. AMPLIFIER—just connect to any crystal pick-up and an 8 ohm speaker for above average output with excellent tonal quality. 1-megohm potentiometer recommended for volume control. Extremely compact, high quality unit. 30/- P. & P. 1/- CODE PRACTICE OSCILLATOR—Simply connect with Morse key, any P.M. speaker and any 1 1/2-v. battery. Fully transistorized and assembled on rigid board, size 2 x 1 1/2 in. 12/6. P. & P. 1/-



### ETCH YOUR OWN PRINTED CIRCUIT KITS 21/-

Each contains over 60 sq. in. of laminated board and sufficient chemicals to make dozens of printed circuits, plus comprehensive instruction book giving advice and examples on translating theoretical circuits into layouts ready for etching. High quality materials—completely safe to handle—carefully prepared to ensure fine definition and uniform results without laboratory control.

### STANDARD SOLENOIDS



Specially made, high grade Solenoids in four basic frame sizes and for 12 v. D.C. or 240 v. A.C. pull or push operation. State requirements.

TYPICAL UNITS TYPE 1. Max. pull 9 oz. Stroke 1/2 in. to 1/2 in. Size 2 1/2 in. long. Bolt dia. 7/16 in. 12/6 Post and Packing 1/-

TYPE 2. Max. pull 18 oz. Stroke 1/2 in. to 1/2 in. Size 2 1/2 in. Send for list. 14/6 Post and Packing 1/-

TYPE 3. Max. pull 26 oz. Stroke 1/2 in. to 1/2 in. Size: 2 1/2 in. long (bolt in) x 1 1/2 in. wide x 1 1/2 in. high. Bolt dia. 1/2 in. 27/6 P. & P. 1/6.

TYPE 4. Max. pull 26 oz. Stroke 1/2 in. to 1 1/2 in. Size: 3 1/2 in. long (bolt in) x 1 1/2 in. wide x 1 1/2 in. high. Bolt dia. 1/2 in. 32/6 P. & P. 1/6.

### DRY REED SWITCHES

Basically a pair of gold diffused reed contacts hermetically sealed in a glass tube filled with inert gas. Contacts can be actuated by permanent, or electromagnets and so form ideal devices for a wonderful range of inexpensive devices such as burglar alarms, limit switches, position indicators, r.p.m. counters, night light controls, door bell switching, level controls, etc., etc. Reed switches have tremendous reliability factors and a working life of about 100 times that of micro-switches, and the uses to which they can be put is limited only by imagination. Each switch is supplied complete with specification, instructions and ideas information. Suitable magnets 1/- extra. 7/- each, post free.

### MINIATURE TYPE 8/6 post free.

Only 0.82 inches long by 0.15 inches thick. Maximum current for long life, 100 milliamperes.

### REED SWITCH COILS 4/- post free

Specially manufactured to provide electro-magnetic operation of Dry Reed Switches. Coil is simply pushed over glass tube envelope of switch and located round switch contacts. Size overall: 1/2 in. diam. x 1 in. long. Two types are available: Type 1—operates from any D.C. voltage from 1 1/2 to 6 volts; Type 2—operates from any D.C. voltage from 6 to 12 volts. Please state type required when ordering.



### SOLAR ENGINE 12/6 Post and Packing 1/6

Actually a Crooke's Radiometer which demonstrates solar power in a fascinating way. Consists of a partially evacuated glass envelope, similar in appearance to an electric lamp, but containing a rotor assembly of 4 diamond shaped vanes coloured black and white on alternate sides. Engine is driven from invisible infra-red rays from the sun, domestic fires or lamps, even a cigarette end; and will rotate at about 3,000 r.p.m. in strong sunlight. Not a toy but an entertaining teaching aid and conversation piece. Size 5 in. high x 8 in. dia.



### CADMIUM SULPHIDE PHOTO-CELLS

New, inexpensive photo-conductive cells which act as light-sensitive resistors that increase conductivity with increased light. These are 1,000 times more sensitive than selenium cells, with greater reliability, and can easily be built into a wide range of simple circuits. Typical used include automatic light controls for home and car, flashing barricade or break-down lights, exposure meters, brightness controls, relay operation, and many other devices. Require only simple low power source from battery or mains transformer. Two types available.



TYPE 1.—Max. voltage 200 v. Output 0.5 W. 10/- post free

TYPE 2.—Max. voltage 150 v. Output 0.15 W. 8/6 post free

Both types have a resistance range of 5 megohms at zero to 500 ohms at 1,000 lux. Sensitive range is 400-800 mu. Supplied with specification, instructions and typical circuits.

**FOR — IMMEDIATE — DESPATCH — PHONE — US — TODAY**

**BUILD YOUR RECORD PLAYER**

4 Speed Autochange 2-tone Cabinets 17" x 15" x 8 1/2 in. High flux loudspeaker and 3 watt valve amplifier ready built. Quality output. Volume and Tone controls. All items fit together perfectly. Special instructions enable assembly in 30 minutes, only 5 wires to join. 12 months' written guarantee.



**AUTOCHANGE KITS**

Complete—as above.

- B.S.R. Monarch ..... £10/19/6. P.P. 5/-
- Garrard Automism ..... £11/19/6. P.P. 5/-
- OR SEPARATELY
- Cabinet with board 14" x 13in. .... £3/9/6. P.P. 3/6
- Amplifier with speaker ..... £3/17/6. P.P. 3/6
- AUTOCHANGERS (Stereo Mono 15"-extra) ..... £5/19/6. P.P. 3/6
- B.S.R. UA25 Superslim ..... £5/19/6. P.P. 3/6
- Garrard Automism Mono ..... £8/10/- . P.P. 3/6
- SINGLE PLAYERS
- Garrard SPR 10 auto. stop/start ..... £5/5/- . P.P. 3/6

**QMAX CHASSIS CUTTER**

- Complete: a die, a punch, an Allen screw and key.
- 1/2 in. 14/6 1 1/2 in. 18/- 1 1/2 in. 22/6
  - 3/4 in. 14/6 1 3/4 in. 18/- 2 in. 34/3
  - 1 in. 15/6 1 7/8 in. 18/6 2 1/8 in. 37/9
  - 1 1/4 in. 45/9 1 3/4 in. 20/6 2 1/2 in. 44/9
  - 1 1/2 in. 18/- 1 3/4 in. 20/6 1 in. sq. 31/6


- CRYSTAL MIKE INSERTS. High output.**
- Miniature size, 1 1/2 in. dia. x 3/16 in. .... 6/6
  - ACOS MIKE INSERT 1 1/2 x 3/16 in. .... 8/6
  - ACOS STICK MIKE 3 1/2 in. .... 35/-
  - T.S.L. DE LUXE STICK MIKE ..... 25/-
  - TELEPHONE CONTACT MIKE ..... 10/6
  - GUITAR XTAL MIKE ..... 15/6
  - PROFESSIONAL MAGNETIC GUITAR MIKE with Vol. and Tone Controls. .... 59/6
  - Moving Coil Mike 90/-, Floor Stand 57/-
  - TANNOY CARBON MIKE ..... 5/6

**FULL WAVE BRIDGE SELENIUM RECTIFIER:** 2, 6 or 12 v., 1 amp., 8/9; 2 a. 11/3; 4 a. 17/6. **CHARGE TRANSFORMERS.** Tapped input 200/250 v. for charging at 2, 6 or 12 v., 1 amp.; 2 amps., 17/6; 4 amps., 22/6. Circuit included. **4 AMP. CAR BATTERY CHARGER** with ammeter. Leads, Fuse, Case, etc. for 6 v. or 12 v., 59/6.

**MINIATURE PANEL METERS**  
Size 1 1/2 in. sq. Precision jewelled bearings, 2% accuracy, silvered dials, fine pointers, 0.1mA. 27/6; 0.5 mA. 27/6; 0.300 v. 27/6; 0.50 mA. 39/6; 0.500 mA. 32/6. "S" meter 35/-.

**MOVING COIL MULTIMETER TR20A.** 0-1,000 v. A.C./D.C. ohms. 0 to 100 K., etc., 0-150 mA. Pocket size 2 in. scale, 49/6. **VALVE HOLDERS.** EA50 6d. B12A. CRT 1/3. **Moulded Int. Oct. or Mazda Oct. 6d.; B7G, B8A, B8G, B9A, 9d.; B7G with can 1/6. B8A with can 1/9. Ceramic EF50, B7G, B8A, Int. Oct. 1/-. B7G, B8A cans, 1/- each. Valve base plugs B7G, B8A, Int. Oct. 2/3.**

**1965 RADIOGRAM CHASSIS**



Three Wavebands ..... Five Valves: ECH81, Long. Med. Short. EF89, EBC81, EL84, EZ80. 12-month guarantee. A.C. 200-250 v. Ferrite Aerial. A.V.C. Negative Feedback. 5 watts 3 ohm. Chassis 13 1/2 in. x 7 in. high x 5 in. deep. Glass dial size 1 3/4 in. x 4 in. horizontal wording. Two Pilot Lamps. Four Knobs. Aligned calibrated. Chassis isolated from mains.

**BRAND NEW £9.15.6**

Matched Speakers 8in. 17/6; 10in. 25/-; 12in. 30/-.

**NEW ELECTROLYTICS FAMOUS MAKES**

TUBULAR	TUBULAR	CAN TYPES
1/350 v. 2/-	100/25 v. 2/-	8/600 v. 9/-
2/360 v. 2/3	250/25 v. 2/6	16/600 v. 12/-
4/350 v. 2/3	500/12 v. 2/6	18+16/500 v. 7/6
8/450 v. 2/3	1,000/12 v. 3/-	32+32/350 v. 5/-
16/450 v. 3/-	8+8/450 v. 3/6	32+32/450 v. 8/-
32/450 v. 3/9	8+16/450 v. 3/9	50+50/350 v. 7/-
25/25 v. 1/9	18+16/450 v. 4/3	64+120/350 v. 11/6
50/50 v. 1/9	32+32/350v. 4/6	100+200/275 v. 12/6

**CONDENSERS.** 0.001mfd., 7 kV., 6/6; 20 kV. 10/6; 0.1mfd. 7 kV., 9/6; Tubular 500 v. 0.001 to 0.05. 9d.; 0.1 1/-; 0.25 1/6; 0.1/350 v. 9d.; 0.5/350 v. 1/9; 0.01/2,000 v. 1/9; 0.1/2,000 v. 3/6. CERAMIC. 500 v. 1 pF. to 0.01 mfd., 9d. Pulse 100 pF., etc., 12 kV., 2/6. SILVER MICA. Close tolerance (plus or minus 1 pF.), 2.2 to 47 pF., 1/-; ditto 1.5 to 815 pF., 1/-; 1,000 to 5,000 pF., 1/9. **TWIN GANG.** "0-0" 208 pF.+176 pF., 10/8; 365 pF. miniature 10/-; 500 pF. standard with trimmers, 9/-; midget, 7/6; midget with trimmers, 9/-; 500 pF. slow motion, standard 9/-; small 3-gang 500 pF. 17/6. Single "0" 385 pF. 7/6. **SHORT WAVE.** Single 10 pF., 25 pF., 50 pF., 75 pF., 100 pF., 150 pF., 5/6 each. Can be ganged together. Couplers 9d. each. **TUNING AND REACTION.** 100 pF., 300 pF., 500 pF., 3/6 each, solid dielectric. **TRIMMERS.** Compression ceramic 30, 50, 70 pF., 9d.; 100 pF., 150 pF., 1/3; 205 pF., 1/6; 800 pF., 750 pF., 1/9.

**MAINS TRANSFORMERS**

	Post
STANDARD 250-0-250, 80 mA., 6.3 v. 3.5 a., tapped 4 v., 4 a. Rectifier 6.3 v. 1 a. tapped 5 v. or 4 v. 2 a.	22/6
Ditto 250-0-350	29/0
MINIATURE 200 v. 20 mA., 6.3 v. 1 a.	10/6
MIDGET 220 v. 45 mA., 6.3 v. 2 a.	15/6
SMALL 250-0-250 v. 45 mA., 6.3 v. 2 a.	17/6
STANDARD 250-0-250 85 mA., 6.3 v. 3.5 a.	17/6
HEATER TRANS. 6.3 v. 1 1/2 a.	7/6
Ditto tapped sec. 1.4 v., 2, 3, 4, 5, 6.3 v. 1 1/2 amp.	8/6
HEATER TRANS. 6.3 v. 4 a.	10/6
GENERAL PURPOSE LOW VOLTAGE. Outputs 3, 4, 5, 6, 8, 9, 10, 15, 18, 24 and 30 v. at 2 a.	22/6
AUTO TRANS. 150 v., 0.115 v. 200, 230, 250 v.	22/6
AUTO TRANS. 500 v., 0.115, 200, 230, 250 v.	82/6
MULLARD "510" MAINS TRANS. TO SPEC. 300-0-300 120 mA., 6.3 v. CT 4 a. 0, 5, 6.3 v. 2 a.	33/6

**MAINS POWER PACKS.** Ready built with Mains Transformers, Rectifiers and Condensers, etc., providing H.T. and L.T. 200 v. 20 mA. D.C. 1/2-wave 6.3 v. 1 a. A.C., 25/6; 220 v. 50 mA. D.C. 1/2-wave 6.3 v. 2 a. A.C., 45/6; 250 v. 80 mA. D.C. full-wave 6.3 v. 4 a. A.C., 45/6.

**"THE POWER MITE" 45/-**  
PM9 Mains Unit 9 volt for Transistor Radios. Same size as P.P.9. (200-250 v.) also miniature PP3 model. .... 19/6

**4 TRANSISTOR PUSH-PULL AMPLIFIER**  
Ready built. Size 3 1/2 x 4 1/2 in. with transformers, 3 and 8 ohms output. Ideal for use with record players, intercoms, BABY ALARMS. Complete with instructions and circuit. 9 v. Batt. 2/3.  
Price 47/6 2 in. Speaker, 15/-.

**NEW MULLARD TRANSISTORS**  
OC71 6/-; OC72 7/6; OC81D 7/6; OC81 7/6; AF115 10/6; AF114 11/-; OC44 8/-; OC45 8/-; OC171 9/-; OC170 8/6; AF117 9/6. OC28 12/6; Transistor Holders 1/3. Sub Miniature Condensers. 0.1 mF., 30 v. 1/3; 1, 2, 4, 5, 8, 16, 25, 30, 50, 100 mFd., 15 volt 2/6. Diode OA81 3/-.

**Volume Controls** 80 Ohm Coax Cable  
Long spindles. Midget Size 5 K. ohms to 2 m. LOG or LIN. L.F.R 3/-; D.P. 4/6. Semi-air spaced 6d. yd., 40 yd 17/6; 60 yd. 25/6. Low loss 5dB. per 100ft. at 500 mc/s. Ideal 625 lines 1/6 yd.

**CAR AERIAL PLUGS 1/6.** Sockets 1/3. COAXIAL PLUG 1/- PANEL SOCKETS 1/- COAX. OUTLET BOXES. SURFACE OR FLUSH 4/-. BALANCED TWIN FEEDERS 6d. yd., 80 or 300 ohms. TWIN SCREENED FEEDER 1/- yd. 80 ohms. TELESCOPIC CHROME AERIALS. 12in. extends to 33in. 8/6 each.

**THE "INSTANT" BULK TAPE ERASER AND RECORDING HEAD DEMAGNETIZER**

Leaflet S.A.E. 200/250 v. A.C. 35/-

**B.T.H. TAPE MOTORS 115 v. A.C. 28 w.** 12/6 pair, for 200/250 v. (in series).

**12" GUITAR HEAVY DUTY 25w. with LIFETIME GUARANTEE, 5gns.**

**BAKERS**

'Selhurst'



- 15 OHM VOICE COIL
- 20-10,000 cps
- BASS RESONANCE
- 80 cps
- GENUINE MUSICAL INSTRUMENT LOUDSPEAKER

**FOR BASS, LEAD AND RHYTHM GUITARS**

- 12in. STANDARD HEAVY DUTY 20 w. 7 gns. More powerful magnet, 14,000 lines, special suspension. 40-14,500 c.p.s. Recommended wherever a high standard of reproduction is desired.
- 15in. AUDITORIUM MODEL 35 w. 18 gns. Improved magnet alcomax with heavy plated assembly, 17,000 lines, 20-12,000 c.p.s. Heat proofed Coil Former. Ideal for Electric Guitars. Older types updated. Reconed, re-energised

**BLANK ALUMINIUM CHASSIS.** 18 s.w.g. 4 sides, riveted corners, lattice fixing holes, 2in. sides. 7 x 4in. 5/6; 9 x 7in. 6/6; 11 x 3in. 6/6; 11 x 7in. 7/6; 13 x 4in. 9/6; 14 x 11in. 12/6; 15 x 14in. 15/- ALUMINIUM PANELS 18 s.w.g. 12 x 2in. 5/6; 18 x 2in. 4/6; 12 x 3in. 3/6; 10 x 7in. 2/6; 8 x 6in. 2/-; 6 x 4in. 1/6.

- WAVE-CHANGE SWITCHES**
- 3 p. 2-way, or 2 p. 6-way, long spindle. .... 3/6
  - 3 p. 4-way, or 1 p. 12-way, long spindle. .... 3/6
  - 4 p. 2-way, or 4 p. 3-way, long spindle. .... 3/6
  - 8 p. 4-way, 2 wafers, long spindle. .... 6/6
  - Wavechange "MAKITS" Wafers available; 1 p. 12-way, 2 p. 6-way, 3 p. 4-way, 4 p. 3-way, 6 p. 2-way. Prices include click spindles, adjustable stops, 1 waf. 8/6; 2 waf. 12/6; 3 waf. 16/6. Extra wafers up to 12, 3/6 each.
- TOGGLE SWITCHES, s.p., 2/-; d.p. 3/6; d.p.d.t., 4/-.**

**BOOKS (List S.A.E.)**

- "W.W." Radio Valve Data. .... 7/6
- High Fidelity Speaker Enclosures. .... 5/-
- Valves Transistors, CRT Equivalents. .... 9/6
- At a Glance Valves, CRT Equivalents. .... 3/6
- TV Fault Finding. .... 5/-
- Mullard Audio Amplifier Manual. .... 8/6
- Radio Valve Guide, Books 1, 2, 3, or 4 ea. .... 5/-
- Practical Radio Inside Out. .... 3/6
- Master Colour Code. .... 1/6
- Coil Design and Construction Manual. .... 5/-
- International Radio Stations List. .... 2/6
- Boys' Book of Crystal Sets. .... 2/6
- Stereoscopic Disc 33, 45, 78 r.p.m. .... 1/-
- How to Receive Foreign T.V. .... 5/-

**JACKS.** Standard open-circuit 2/6, closed-circuit 4/6. Grundig type 3-pin 1/3; Grundig Type 3/6. Phone Plugs 1/- Socket 1/- Banana Plugs 1/- Sockets 1/- **JACK PLUGS STANDARD.** Screened 3/- Grundig 3-pin 3/6. **ALIGN NON-REV PLUGS AND SOCKETS.** P74 2-pin 4/3; P73 3-pin 4/6; P184 6-pin 6/6; P486 6-pin 12/6; P380 3-pin 4/- **RESISTORS.** Preferred values, 10 ohms to 10 meg. 1 w., 1/2 w., 1 w., 20w. Ad; 10% 6d., 1/4 w. 8d.; 2 w. 1/- **HIGH STABILITY.** 1/2 w. 1% 27/-, Preferred values, 10 ohms to 10 meg. Ditto 5%, 10 ohms to 22 meg., 9d. 5 watt 10 watt 15 watt **WIRE-WOUND RESISTORS** { 1/3 1/6 2/- } 10 ohms 10,000 ohms 12.5 k. to 25 k. 10 w. **MAINS DROPPERS.** Midget. With sliders. 0.3 a. 1 k. 0.2 a., 1.2 k., 0.15 a., 1.5 k., 0.1 a. 2 k., 6/- each. Line Cord 100 ohms ft. 3-way 1/- H. **WIRE-WOUND Pots.** 3 WATT PRE-set Min. T.V. Type. **WIRE-WOUND 4-WATT STANDARD SIZE POTS.** LONG SPINDLE VALUES 50 OHMS to 50 K. 6/6; 100 K. 7/6. **SPEAKER-FRET.** Tygan various colours. 52in. wide from 10/- ft., 26in. wide from 5/- ft. Samples, large, S.A.E. **EXPANDED METAL.** Gold 12 x 18in. 6/- **ARBENITE TRANSISTOR TRANSFORMERS** D8035, 7.3 CT : 1 Push Pull to 3 ohms for OC72, OC81 11/- D8034, 1.75 : 1 CT. Push Pull Driver for OC72, OC81 11/- D8058, 11.5 : 1 Output to 3 ohms for OC72, OC81 11/- D239, 4.5 : 1 Driver; D240, 8.5 : 1 Driver 11/- ea. 11/6 **ARBENITE TRANSISTOR VOLUME CONTROLS,** 5 K with switch 5/3 **LOUDSPEAKERS.** P.M. 3 OHM FAMOUS MAKES. 2 1/2in., 3in., 4in., 5in., 7in. x 4in., 15/6 each; 8in. 17/6; 6in. 16/6; 10in. 30/-; 12in. 30/-; 15 ohms 35/-; 10in. x 6in. 22/6; 8in. x 5in. 21/-; 9in. x 6in. 21/-.

RETURN OF POST DESPATCH

EXPERTS ANSWER ALL ENQUIRIES

NO ORDER TOO SMALL

**RADIO COMPONENT SPECIALISTS**

337 WHITEHORSE ROAD, WEST CROYDON Telephone THO 1665

Written guarantee with every purchase.

Buses 133, 68 pass door. S.R. Str. Selhurst. (Export welcome. Send remittance and extra postage, no C.O.D.)

P.P. Charge 1/-, Full List 1/-, C.O.D. 2/- extra

**SONA STREAMLINE MICROPHONE**



Omnidirectional response 60-10,000 c/s. Output level 52 dB. Built-in on/off switch. Provision for conversion to hand-held, cord suspended on stand mike. Attractive satin chrome finish.  
 Microphone **39/6** P. & P. 2/6.  
 Desk Stand **10/-** P. & P. 2/6.  
 Floor Stands Available.

**GOLDENAIR SOUND MIXER**

This splendid unit enables the mixing of up to 4 inputs, i.e. mic, tape, gram, tuner, etc. Compact and completely self contained using a standard battery. Four standard jack inputs. Well finished handsome cabinet. Ideal for use with valve or transistor amplifiers. Price **45/-** P. & P. 2/6.

**R.A.F. SHORT WAVE RECEIVER**

35 to 40 Mc/s. Power supplies 12 volts and 250 volts D.C. In excellent condition with exceptionally fine slow-motion tuning and clean component layout. Price **22/19/6** P. & P. 6d.

**HIGH QUALITY PAXOLIN PANELS**

Size 8 1/2 in. x 10 1/2 in. x 1/10th in. Price **1/3** each. P. & P. 7d. Six for **7/6** post free. 12 for **15/-** post free.

**LEAD ACID ACCUMULATORS**  
(Unspillable)

2 volts 16 A.H. Brand new. Size 4 x 7 x 2in. **4/11** each. 3 for **12/6**.



**AMERICAN V.H.F. SIGNAL GENERATOR TYPE 1-130-A**

A very well made instrument with a built-in crystal master oscillator. Exceptionally fine slow motion tuning, with easily read scale. Stepped output and an adjustable amplitude. Ideal for two metres and V.H.F. calibration. Price **55/-** P. & P. 7/6d.

**TANK AERIALS**

Fully interlocking copper sections one foot in length. Will make ideal dipoles, car or scooter aerials. Price, six sections complete with canvas carrying case **3/6** P. & P. 1/6. Additional sections 6d. each. Please include sufficient postage.


**WALKIE TALKIE No. 46**

Compactly built to be carried by one man. This has a range of approx. 10 miles, and being crystal controlled, tuning is avoided, and operation is as accurate as a telephone. Frequency 3.6-9.1 Mc/s. Complete stations comprising receiver transmitter, rod aerial. One set of headphones and mike, in canvas carrying bag. Crystal coil packs available Price **35/-** per set. Post free. Brand new in maker's sealed cartons. Price per station **24/10/-**. P. & P. 10/- each. Two stations for **29/10/-** post free.



**SUPERHET RADIO CHASSIS**

These well-made chassis were made for the Government for Forces entertainment with 6K8, 6K7, 6Q7, 6V6. Choke smoothing slow-motion tuning, printed scale, 200-500 metres. BRAND NEW, complete with valves and 6 volt Power Pack. Cabinet with 8in. speaker to fit. Complete in maker's cartons. **£3.19.11** P. & P. 7/6



**19 SET TRANS/REC. ACCESSORIES**

12 PIN CONNECTORS **12/6** each. P. & P. 2/6.

**HEADPHONES AND MICROPHONE**

In good condition, mostly new. **17/6** P. & P. 3/6.

**WHIP AERIALS**

8ft. 6in. **7/6** P. & P. 2/6. 5ft. **4/6** P. & P. 2/6.

**TX/RX. NO. 19 POWER UNITS**

12v. D.C. input. Output 275v. at 110 m.a. and 500v. at 50 m.a. This equipment is of American or Canadian manufacture. Price **£1/10/0**, Carriage 10/-.

**MORSE KEYS**

Morse key assembly. Key with base, cover and terminals. Complete with lead. **6/11** P. & P. 2/-.  
 Two for **12/6** Post free.



**RESISTOR COLOUR CODE INDICATOR**

Enables you to determine the value of a resistor at a glance. A must for the constructor. Price **1/6** P. & P. 3d.

**TWO-WAY SOUND POWERED TELEPHONE**


As used by the armed forces. These sound powered earpieces will work up to a distance of 1 mile without the use of batteries. Beautifully made, ideal for use in the house, office or garden. Complete with connecting cable **17/8** P. & P. 2/6.

**WALKIE TALKIE NO. 46 and NO. 38 SET H.T. POWER PACKS**

This valuable unit provides a stabilised H.T. voltage straight from the mains. Robustly and compactly built. Price **39/6** P. & P. 6/-.

**TYPE 19 SHORT WAVE RECEIVING SET**

Works straight off the mains. An excellent short wave receiver, requires only phones for immediate operation. Price **25/19/6** P. & P. 10/-.  
 Suitable phones 15/- per pair.  
 P. & P. 2/6. During an evening's testing of this excellent receiver, we obtained clear reception from scores of stations, many of them thousands of miles distant, including ship stations, Government transmission, maritime broadcasts and also the short wave radio Luxembourg broadcasts.



**MATCHED MULLARD TRANSISTORS**

One OC81D Driver.  
 Two OC81 Output stage matched pr. **9/11** the set. P. & P. 1/-.

**TRANSFORMERS**

**Type 1** Filament Transformer. 200/250v. primary. 50 c/s. Secondary 6.3v. at 2 amps. Price **5/11** P. & P. 2/-.  
**Type 3** Primary 200/250. 50 c/s. Secondary tapped as follows:—5v., 11v., 17v. All at 4 amps. Price **29/6** P. & P. 3/6.  
**Type 4** Primary 200/250. 50 c/s. Secondary tapped as follows:—3v., 4v., 5v., 6v., 8v., 9v., 10v., 12v., 15v., 18v., 20v., 24v., and 30v. All at 4 amps. Price **39/6** P. & P. 3/6.  
**Type 6** A really excellent well made robust transformer, fully shrouded and upright. Primary 200/250, 50 c/s. Secondary 450-0-450 v. at 200 m/a. 6.3v. at 4 amps. 5v. at 3 amps. Price **65/-** P. & P. 5/-.

**R.F. FIELD INDICATOR**

A fine instrument that can be used for checking radiation from a transmitting aerial. The sensitivity can be controlled by adjustment of panel control or by adjustments of aerial length or alternatively increasing distance from the radiating aerial. A must for the radio ham. Frequency range:—1-250 Mc/s. 200 m/a. Complete with instruction book, extendable aerial and audio earpiece. Price **59/6** P. & P. 2/6.

**DOUBLE THROAT MIKES**

These can be adapted for use with musical instruments. **5/11** P. & P. 1/-.

**No. 19 SET INSTRUCTION HANDBOOK**  
**3/6** each. P. & P. 6d.

**1155 INSTRUCTION HANDBOOK**  
**3/6** each P. & P. 6d.

**H.R.O. INSTRUCTION HANDBOOK**  
**3/6** each P. & P. 6d.

**FREQUENCY METER B.C.221** P. & P. 6d.  
**3/6** each

**46 WALKIE TALKIE SET HANDBOOK**  
**3/6** each P. & P. 6d.

**THE Goldenair "THIRTY" HI-FI AMPLIFIER**

A high quality 30-watt amplifier developed for use in large halls and clubs, etc. Ideal for bass, lead or rhythm guitars, schools, dance halls, theatres and public address. Suitable for any type of mike or pick-up. Valve line-up: two EF86; one ECC83; one GZ34; two EL34. Four separate inputs are provided with two volume controls. Bass and Treble controls are incorporated. Amplifier operates on standard 50 c/s. mains. 3 ohm and 15 ohm speakers may be used. Perforated cover with carrying handles can be provided if required, price 21/-.

go **Goldenair**

Customers are invited to see and hear this amplifier at our shop premises in Lambert's Arcade. Send S.A.E. for illustrated leaflet.

or deposit of £1/16/- and twelve monthly payments of £1/9/2. Carriage 15/- to be sent with deposit.



**TWICE THE QUALITY — HALF THE PRICE**

POSTAGE RATES APPLY U.K. ONLY. S.A.E. WITH ALL ENQUIRIES  
 NEW WALK ROUND STORE OPEN IN LAMBERT'S ARCADE, LOWER BRIGGATE, LEEDS 1. NEXT TO HALFORDS CYCLE SHOP. OPEN ALL DAY SATURDAY. 48 HOUR DESPATCH SERVICE  
 ALL MAIL ORDERS TO OUR BRIGGATE HOUSE ADDRESS

**TERMS:**  
 CASH WITH ORDER  
 5/- EXTRA ON C.O.D.  
 ORDERS  
 No C.O.D. under 30/-.



**SEND 1/- FOR LISTS.**  
 TRADE SUPPLIED  
 ORDERS FROM  
 ABROAD WELCOMED  
 Telephone: 34703:

**SONA ELECTRONIC CO., LTD. (Dept. W.W.8). BRIGGATE HSE., 13 ALBION PL., LEEDS**

# SOUTH SUPPLIES


(ELECTRICAL) LTD.

POST ORDERS TO OLD KENT RD. ADDRESS

95, OLD KENT RD. S.E.1 BER 5810  
 72, BOROUGH HIGH ST. S.E.1 HOP 2125  
 90, HIGH ST., EDGWARE EDG 6751  
 17, WOODFORD AVE., ILFORD CRE 4815  
 291, HIGH RD., CHISWICK, W.4

### ECCO MODEL S.E.37B

Push button, 20,000 O.P.V.  
 Test Meter, D.C.  
 Volts: 0-1-10-50-250-500-1,000.  
 A.C. Volts: 0-10-50-250-500-1,000  
 D.C.  
 Current: 0-50 mA., 10 mA., 50 mA.  
 Resistance: 0-5 kΩ-500 kΩ-5 MΩ.  
 Inductance: 50 H.-5,000 H.  
 Capacitance: 150 pF-0.02 μF  
 D.B.: -20Ω +22 D.B., 20Ω 36 D.B.  
**THE SIMPLEST AND MOST EFFICIENT METER ON THE MARKET AT £££s BELOW ITS TRUE VALUE.**



**£5.15/0**  
 P. & P. 2/6.




### TECH. MODEL PV-58 VACUUM TUBE VOLTMETER

Finest design for stable and accurate measurement. 1% tolerance on all resistors. Large design 4in. 200 a. meter for accurate readings 11 megohm input.  
**Ranges:**  
 - D.C.V. 0-1.5-5-15-50-150-500-1,500 v.  
 + D.C.V. 0-1.5-5-15-50-150-500-1,500 v.  
 A.C.V. 0-1.5-5-15-50-150-500-1,500 v. R.M.S.  
 0-1.4-4-14-40-140-400-1,400-4000 P.P.

Resistance: 2 ohms to 1,000 megohm.  
 Decibels: -10 db. to +65 db.  
 Operation: 220/240 v. A.C. Size 7in. x 4 1/2in. x 4in.  
 Each tester is supplied brand new and fully guaranteed complete with probe and operating instructions.

The finest value in tester available at only **£12/19/6** Complete. P. & P. 3/6 ex.

### ECCO 4-Channel Transistorized MICROPHONE MIXER



**PRICE 49/6**  
 post paid.

Give all your recordings that professional touch. The Ecco mixer allows you to mix 4 signals such as Mic, tape, records and tuner into a single output. Wonderful for groups, amateur recorders, etc.  
 Guaranteed to give hours of pleasure.

### ECCO MODEL S.E.550

100,000 O.P.V. PROFESSIONAL TEST METER.  
**Highest Accuracy:** 3% on D.C.V. -amps, -ohms. 4% on A.C.V.  
 D.C. Volts: 0-0.5-2.5-10-50-250 at 100,000 O.P.V. 0-500-1,000 at 35,000 O.P.V.  
 A.C. Volts: 0-2.5-10-50-250-1,000 at 12,500 O.P.V.  
 D.C. Amps: 0-10 μa. at 500 mV. 0-250 μa.-2.5 mA.-250 mA.-10 at 150 mA.  
 Resistance: 0-20 m.-2 m.-200 k.-20 k. 160 k.-16 k.-100Ω. Centre scale.  
 Decibels: -20 to 62 (0 db = 0.775 v.).  
**£7.19/0**  
 P. & P. 3/6.



### ECCO MODEL S.E.100 TRANSISTORIZED VARIABLE D.C. POWER SUPPLY

**METER RANGES**  
 Volt: 0-20 V.D.C.  
 Current: 0-20 mA.  
 0-200 mA.

**Voltage Range**  
 0-20 volts.  
 Continuously variable.

Maximum Current Cap.: 0-10 v. 200 mA. Intermittent. 0-20 v. 150 mA. continuously.  
 Impedance Source: Current position. 3.3 ohms. Voltage position 0.2 ohms.  
 Power Input: 220/240 v. Size 6in. x 3 1/2in. x 2 1/2in.  
 Fuse: 0.5 amp., slow blow, in D.C. circuit.  
 The extremely wide variable voltage range, low A.C. ripple and source impedance of the S.E.100 makes it a most satisfactory power supply to operate transistor radio, hearing aids, pre-amplifiers, instruments and other electronic devices under repair. The S.E.100 can be used in television and radio servicing, as an A.V.C. or A.G.C. voltage source as a D.C. filament supply, operate relays, recharge small batteries and light electro plating as in dentistry.  
**£6/10/0** P. & P. 4/6. Fully guaranteed and complete with test lead, croc. clips and operating instructions.

### MULTI METER BARGAIN ECCO MODEL 220S

4,000 O.P.V. on Both A.C. and D.C.  
 D.C. Volts 0-5-25-125-600-2,500.  
 A.C. Volts 0-10-50-200-1,000.  
 D.C. Current 0-250 μa.-250 mA.  
 Resistance 0-10 kΩ-0-1 MegΩ.  
 Decibels -20 to +22 db.  
 Meter size 4 1/2in. x 3 1/2in. x 1 1/2in.  
 Complete with test leads and battery.  
 Wonderful Value at 65/- + 3/- P. & P.



### ECCO MODEL S.E.200 MINI-LAB TESTER

This remarkable meter has seven test instruments packed into one pocket size case which can be taken and used anywhere. **Resistance Substitution.** 100Ω, 1kΩ, 10kΩ, 100kΩ 1MΩ. **Capacitance Substitution.** .002 mfd.-.005 mfd., .02 mfd.; 1 mfd. and 10 mfd. **R.F. Signal Generator.** Frequency fixed at 440 Kc/s. (adjustable to 700 Kc/s.), output 35 mV. approx. **Audio Generator.** Frequency 400 c/s. Output 35 mV. approx. **D.C. and A.C. Volts.** 4 ranges: 0-15-50-150-500 volts at 4,000 O.P.V. **R.F. Field Strength Indicator.** Frequency range 1 to 140 Mc/s. Antenna 5 sections and suitable for quick checks in the service shop and Home Service calls. **£8/19/6** each. Complete with Test Prods and Battery, fully guaranteed.




**ECCO MODEL MS4 FLOORSTAND**  
 Height fully open 58 1/2in. Fully closed 33in. Three sections, fully telescopic. 3/4in. or 1/2in. mic adaptor.  
**39/6** ea. P. & P. 5/6.  
 Heavy cast iron base. Wonderful value.

**NEW !!! NEW !!!**  
 CM61—High Impedance Crystal Mic. with built-in on/off switch. Complete with Table Stand, Plug-in Mic. lead and neck Holder all in a wonderful Satin Chrome Finish.  
**★ VALUE AT 33/6 + 1/9 P. & P.**



**MC 110 CRYSTAL MIC.**  
 With on/off switch and holder. Satin chrome finish.  
**26/6** P. & P. 2/6.



**MD 175 DYNAMIC MIC.**  
 Impedance 50 kΩ.  
 Sensitivity: 55 db at 1,000, non-directional, latest American design.  
**45/-** P. & P. 2/6.

### FAMOUS MAKE AMPS AND PRE-AMPS at Vastly Reduced Prices

3-4 watts, £4/15/-; 4-6 watts, £5/7/6; 5/5 Stereo, £11/5/-; 10 watts, with separate pre-amp, £14/3/6; 30 watts, £15/2/6; 50 watts, £20/14/3; Tremolo unit, £3/15/6; tape pre-amp, £8/10/-.

### Miniature Push-Pull Audio AMPLIFIER

4-transistor, output 200 m.w., low and high gain, inputs to operate 3Ω speaker. Wonderful value, 31/6. P. & P. 2/6. Complete with operating instructions.

### A GENUINE 4-AMP. BATTERY CHARGER for only 45/- P. & P. 4/6.




Made in England to our own specification and fully guaranteed.  
 High-Low-Med. Charge Rate. 6 v. or 12 v. Selector Plug. 200/50 v. Mains Selector Plug. 4 amp. cartridge fuse protection, complete with mains lead, charging lead and croc. clips.

### Personal Callers Only

The Very latest Super 8mm Line Autochanger Record Player. Built and ready to go, incorporating the New B.S.R. U215 Super 8mm Deck in the latest design cabinet. 2 1/2 watt output with tone and Volume Controls. Fully Guaranteed 11 Gns.


### VANTONE MAINS RADIOS

5-valve superhet with built-in Ferrite tuning bar.  
**£3/15/-**  
 Plus P. & P. 3/6. Fully guaranteed.  
 This wonderful little radio will receive all stations on med./wave loud and clear inc. Luxembourg. Ideal for bedrooms, kitchens, or as a second mains radio.



### EHRECORDER

4 Transistor Tape Recorder. Easy to operate single lever function control. 200 mW. output, complete with microphone -3in. Tape - Spare Spool - Personal earpiece and batteries. Wonderful Value **£4/19/6** plus 5/6 P. & P.  
**The Silver Ribbon 625 INDOOR AERIAL**  
 Also for 405, ITV -BBC and F.M. Complete with co-ax. plug. 19/6 P. & P. 1/6.



### AMERICAN RECORDING TAPES

5in. Standard	600ft.	9/6
5in. L.P.	900ft.	12/-
5in. D.P.	1,200ft.	15/-
5in. L.P.	1,200ft.	15/-
7in. Standard	1,200ft.	15/-
7in. L.P.	1,800ft.	17/6
7in. D.P.	2,400ft.	25/6

These Quality American Recording Tapes with 100% Guarantee. Try it yourself.

### ELAC SPEAKER OFFER

5in. Speaker	8/6
6in. Speaker	11/-
8in. Speaker	11/-
7in. x 4in. Speaker	10/-
4in. Rola Celestion	9/6

P. & P. 3/6.

### EXTENSION SPEAKERS IN CABINETS

5in., 25/-; 7in. x 4in., 2-tone modern design with vol. control, 35/-; 8in., with vol. control, 35/- P. & P. 4/6.

### TRANSISTOR RADIO EXT.

Speaker in handsome wood finish cabinet. Complete with ext. lead, 2.5 mm. and 3.5 mm. plug to fit any type radio, 22/6. P. & P. 1/6.

### TRANSISTORIZED MEGOHM METER

The finest one hand operation Megs. on the market. Full scale reading 0.5MΩ at 500 volts. **£17/17/-** plus 7/6 P. & P. Complete with fully enclosed carry case and leads.

### RONETTE BINOFLUID B.F.40 STEREO CARTRIDGE

Freq. Res. 30-12,000 c/s. Sensitivity 180 mV./cm./sec. Load 1 MΩ 100 pF. Complete with Sapphire Stylus.  
 Our Price 12/6 ea. P. & P. 1/6.

### RONETTE STEREO O.V.S. TURNOVER CARTRIDGE

With 2 Sapphire Stylus.  
 Our Price 19/6 ea. P. & P. 1/6.

### Acos 45

Die-cast, hand shaped body. Special offer. 15/6 plus P. & P. 2/6.

### TELEPHONE PICK UP

For use with any type tape recorder, wonderful value, 5/9. Post paid.

### SUN ACE 4 4 transistor new push button.

Super de-luxe Tape Recorder. Circuit—4 transistors. Recording D.C. bias 1-track, built-in 2 1/2in. p.m. speaker. Recording time 17 mins. approx. on 200ft. tape. Batteries 1U 2-1 PP3. Complete with crystal microphone—personal earphone, 200ft. Tape and reel. Spare spool. Carrying strap and Batteries. Wonderful value at only **£4/15/-** plus 4/9 P. & P. (Fully guaranteed).





## FIRST QUALITY FACTORY FRESH TAPE!

5in. Std.	600ft.	8/6
7in. Std.	1,200ft.	12/6
5in. L.P.	900ft.	10/-
5in. L.P.	900ft.	12/6
5 1/2in. L.P.	1,200ft.	12/6
5 1/2in. L.P.	1,200ft.	15/-
7in. L.P.	1,800ft.	15/-
7in. L.P.	1,800ft.	20/-
4in. D.P.	600ft.	9/-
5in. D.P.	1,200ft.	15/-
5 1/2in. D.P.	1,800ft.	22/6
7in. D.P.	2,400ft.	25/-

**HIGH QUALITY TENSILISED TRIPLE PLAY**

3 1/2in. 600ft.	15/-
4in. 900ft.	17/6
5in. 1,800ft.	35/-
5 1/2in. 2,400ft.	45/-
7in. 3,000ft.	58/6

Only limited quantities available at present.

**SPECIAL OFFER!**  
THREE 300ft. 3" Message Tapes FOR ONLY .....10/-

Where not stated, please add P. & P. 2/- per order. (Orders over £3 post free.) Many other types available including "SCOTCH," "EMI," "BASF," "Synchron," etc. Send S.A.E. for our huge money-saving literature on Tapes and Accessories SPECIAL DISCOUNT FOR TAPE QUANTITIES.

**COLLARO "STUDIO" TAPE TRANSCRIBERS.**  
Brand new in original cartons. 3 speeds, 10, 3 1/2, 7 1/2 i.p.s.  
3 motors, digital counter, etc. Complete with 7in. spools, instructions and fixings, A.C. 200/230 v. operation. **SPECIAL PRICE £10.** Carr. 7/6.

**The "INSTANT" BULK TAPE ERASER**  
A complete reel of magnetic tape can be effectively erased of all traces of recorded matter within a few seconds. 32/6. P. & P. 2/6.

**"GEE'S" ACCESSORY KIT**  
1 "BIB" Splicer, 1 Splicing Tape, 3 Leader Tapes (3 colours), 10 Retaining Clips. Packed in plastic container. **PRICE 32/6.** P. & P. 2/6.

### ALL TRANSISTOR POWER AMPLIFIER K3T

30 WATT

100/250 A.C. mains operation. Separate bass and treble controls. Output impedance 4-10 ohms transformerless. High and low impedance inputs for dynamic or crystal microphone and pick-up. Has 2 separate input channels and 2 separate volume controls enabling input signals to be mixed or faded from one channel to the other. Size 9 1/2in. x 8 5/16in. x 3in. Complete with circuit diagram and full instructions. **PRICE £26/10/-.** P. & P. 5/-. S.A.E. for leaflet.




### JASON TRANSISTOR AMPLIFIER

200/250 v. A.C. mains operation. Separate bass and treble controls, 10 watt power output, 15 ohms output impedance. inputs for Gramophone, Radio, Tape. Complete with circuit diagram and full instructions. Brand new with maker's guarantee. Originally £22. **OUR PRICE £14.** Few only!



### DUAL IMPEDANCE SLIM DYNAMIC MICROPHONE.

Model PA.46. Beautiful, professional-looking, with solidly cast, tapered slim case. Heavy duty on-off slide switch. Built-in transformer supplies dual unbalanced impedances—low 600 ohms, high 50,000 ohms. Omni-directional when used vertically—cardioid pattern when tilted. Complete with 5ft. plug-in cables. **PRICE £4/4/-.** P. & P. 2/6.



### STUDIO CRYSTAL MICROPHONE.

Model PA.17. A fine quality all directional microphone with a 360° pick-up and the added power and sensitivity of two individually shock mounted and phased crystal cartridges, giving maximum pick-up from all sides. Overall size 7in. H. x 3in. W. Complete with 4ft. cable. **PRICE £2/2/-.** P. & P. 2/6.



### "DYNA-SLIM" MICROPHONE


MODEL PA.43. Dynamic 30K high impedance microphone with on/off switch. Unidirectional head. Length 8in., 1 1/4in. dia. tapered. Complete with cable and connector, 69/6. P. & P. 2/6.

### CRYSTAL MICROPHONE MODEL BM.3

Three-way mike for hand, desk or floor stand use. Response 100-8,000 c/s. Sensitivity—62 dB. Length 7in. Head dia. 1 1/4in. Supplied with neck band, lead and standard jack plug. **ONLY 39/6.** P. & P. 2/-. Table stand 12/6 extra.

**MICROPHONE FLOOR STAND (Telescopic).** HEAVY 9in. dome, chromium base, chromium stand with screw top. Extends to approx. 6ft., 55/-, Carr. 5/-.

## P.A. EQUIPMENT




**RE-ENTRANT LOUD HAILERS (Ex. Govt.)**  
Heavy duty 20 watts, all metal, 15 ohms. Dia. 15in., length 15in. (approx.). Brand new and boxed, £9. Carr. 10/-, Dito re-conditioned £6/10/-, Carr. 10/-.

### EXPONENTIAL HORNS BY FAMOUS MAKER OF P.A. SYSTEMS

20 watt, 15 ohm speech coil, 30in. long, 20in. square flare. Good condition. **FEW ONLY.** £7/10/-, Carr. 12/6.

**10 inch P.M. HEAVY DUTY SPEAKERS**  
Complete in all steel blue-grey double grill cabinet, 39/6. Carr. 6/-.

## PUBLIC ADDRESS SYSTEM



Complete system comprising Control Unit, 4 Tannoy loud hailers, microphone and headphones, etc. 12 v. D.C. operation. Low battery drain. 8 watts power output. The ideal days, factories, garden fetes, etc. Speakers can be spaced effectively over hundreds of yards. **Guaranteed Brand New in sealed cartons. Price £10/10/-, Carriage 15/-.**

**L.T. SUPPLY ACCUMULATORS** available as follows:  
12 Volt 25 A.H. 50/-; 2 x 6 Volt 20 A.H. 35/-, Carriage extra.  
**TANNOY LOUD HAILERS** available separately 30/- each. Carr. 5/-, Spare diaphragms 12/6 each.

**15 WATT TRANSISTOR POWER AMPLIFIER**  
A new transistor Audio Frequency Amplifier of new modern design incorporating a number of additional practical features. Operates on 12 volts. Power output 15 watts. Output impedance 25, 15 or 3.75 ohms. Inputs for mike and gram. Frequency response 100 c/s. to 10 kc/s. Incorporates on/off switch, volume control, tone control, pilot lamp. Complete in pale green hammer finish metal case, size 6 x 3 1/2 x 5 1/2 in. Weight 4 1/2 lb. Made in England. Brand new and fully guaranteed. All parts replaceable. **ONLY £21.**

**G.P.O. STANDARD 19in. HEAVY DUTY EQUIPMENT RACKS**  
4ft. 6in. Channel Uprights, £4. Carr. 15/-.  
5ft. 6in. Angle Uprights, £4/10/-, Carr. 15/-.  
6ft. Channel Upright, £6/10/-, Carr. 20/-.  
7ft. Channel Upright, £8. Carr. 20/-.  
All with Heavy Duty Base.

### 'POWERSTAT'

**VARIABLE TRANSFORMERS**  
Input 230 volts. 50/60 cycles. Output 0-260 volts at 9 a.m.s. Fully shrouded. For bench or panel mounting. A robust job of outstanding quality and performance. Brand new and guaranteed. **£15.** Carr. 7/6. Made in U.S.A.



### OUTSTANDING BUYS IN QUALITY MULTIMETERS

100,000 o.p.v. Model 370-N. Price £14/14/-.  
30,000 o.p.v. Model 500. Price £8/17/6.  
20,000 o.p.v. Model C.T.500. Price £5/5/-.  
4,000 o.p.v. Model H.20. Price 79/6.  
All complete with test leads, battery, instructions and fully guaranteed.

**AVO VALVE TESTER.** Consists of two parts—valve panel with selector switches and meter with voltage controls, etc. Numerous valve bases including B7G, B8A and B91. This fine instrument supplied in good condition complete with manual. £11. Carr. 7/6.

### COSSOR 1049 DOUBLE BEAM OSCILLOSCOPE

A fine instrument in perfect condition and in good working order. £45. Carr. 20/-.

**AUTO TRANSFORMERS.** Step up, step down, 110/115, 220/230 v. Fully shrouded terminal block connectors. 150 w. 32/6; 300 w. 47/6; 500 w. 67/6; 750 w. 77/6; 1,000 w. 90/-; 1,500 w. 139/6; 1,750 w. 175/-, Carr. 5/- on each type.

### RECORD MEGGERS

500 v., with case, perfect order. **£12/10/-.**


**EVERSHED & VIGNOLES.** Wee Megger 500 v., with leather carrying case, good working order, £15. Also 100 v., as above. £6/6/-.



**EVERSHED & VIGNOLES Series 11,** 500 v. Megger in good cond. £18/18/-.  
**EVERSHED & VIGNOLES MEGGER CIRCUIT TESTER** (low reading ohm meter). 2 ranges 0-3, 0-30 ohm. Complete with leather case and test leads. As new, £6/6/-, Citto 0-500, 100-5,000 ohms £8.

### TRANSISTORISED "BULL HORN"

Ideal for Sports meetings, building sites, etc. Range up to 200ft. Simply press trigger switch and talk. Operates on 6 standard 1 1/2 v. batteries. Length 11 1/2in. Weight only 2 1/2 lb. **PRICE £4/15/-.** Complete with batteries and instructions.



### WANTED FOR CASH!!

Good quality modern P.A. Equipment. Test Equipment, Hi-Fi Equipment, what have you! Single items or quantities. Offers by return.

**GEE BROS. RADIO LTD.**  
15 LITTLE NEWPORT STREET, LONDON, W.C.2. GER. 6794/1453  
Open 9-6 Mon. to Fri. 1 p.m. Sat.  
Adjoining Leicester Square Tube

# IMMEDIATE DELIVERY


ALL ITEMS FULLY GUARANTEED



Model SB10 10 amp.

## VARIABLE VOLTAGE TRANSFORMERS

### World Famous 'SLIDUP'




★ Rated current consistent at all points along the winding.  
Output: 0-260 v. Input: 230 v. A.C. 50/60~.  
Shrouded fully variable transformers for bench or panel mounting.

Inset shows latest type brush gear enabling 1 volt variations to be made.

- 2.5 Amp. £7.10.0
  - 5 Amp. £10.10.0
  - 10 Amp. £19. 5.0
  - 20 Amp. £39.10.0
- Ex works.

## PORTABLE VARIABLE A.C. POWER SUPPLY UNIT

Designed for Engineers whose requirements call for a visual indication of volts applied.



OUTPUT: 0-260 v. 1 1/2 amps.  
INPUT: 230 v. A.C. 50/60~. Unit fitted with fuse, voltmeter, neon lamp, on-off switch and lead. Size 8x5x5 in. high.

PRICE £8.10.0

P. & P. 10/-.



## CONSTANT VOLTAGE TRANSFORMER (Automatic Mains Stabilizer)

Maintains correct voltage without any seasonal drops. No unstable test gear reading.

- ★ Perfect stabilization.
- ★ Instant response.
- ★ No moving parts—no maintenance
- ★ No voltage drop in winter.

Specification: INPUT—110 v. and 240 v. A.C. ±20%. 50 cycles. OUTPUT—240 v. A.C. 50 cycles. ±1%. CAPACITY—250 VA.

Size: 10x5x7 in. high. Weighs only 2 1/2 lbs. WITH SIGNAL LAMP AND SWITCH.

ALSO 1,000 watt Model: Input 240 v. A.C. ±20%. Output 240 v. A.C. ±1%.

£29.10.0. Pkg. & carr. 30/-.

Complete with lead and plug, in silver hammer metal case.  
£11.10.0 Carr. 20/-.

- ★ 5 mV.-1,500 v. A.C.
- ★ 100 mV.-1,500 v. D.C.
- ★ 11 megohms sensitivity.

### VALVE VOLTMETER

Latest circuitry provides perfect stability and sensitivity. PROFESSIONALLY ACKNOWLEDGED

- ★ 0.1 ohm-1,000 megohms.
- ★ dB scale—30 dB to +65 dB. (0dB: 1 mW. in 600 ohms.)

PLUS

- ★ 1 kc. Oscillator Test Source.
- ★ Complete with Test Probe with BUILT-IN A.C./D.C. switch.

This superbly finished instrument is invaluable in production depts. and labs. and is presented in an attractive light grey crackle steel case with satin alloy front. Mains operated. Size and weight: 5 1/2 in. x 3 in. x 8 in. high. 5 1/2 lb.



Model 304B.

Price ONLY £35.0.0 —no extras.

## Portable TRANSISTOR TESTER



- ★ Accurate.
- ★ 4in. 50µA Meter.
- ★ Screw terminals and spring sockets.
- ★ Capable of testing PNP and NPN Types and Diodes.

Size and Weight 7x5x3 in. 2 1/2 lb.

Model AT-1.

Powered by pen cells.

£10.10.0 P. & P. 7/6.

C/W Batteries.



## VARIABLE HIGH-VOLTAGE UNIT

Dielectric Breakdown Tester.

- ★ Infinitely variable up to 3,000 volts, 0.1 amp.
- ★ Can be accurately set.
- ★ Ideal for continuous testing.
- ★ Built-in automatic safety cut-out.

For bench use. Robustly built. 4 1/2 in. x 4 in. modern styled meter set at an easy-to-read angle.

Complete with input and test leads with clips. Input: Mains voltage.

Model T30, 0-3,000 v. A.C. £32 0 0  
Model T50, 0-5,000 v. A.C. £40 0 0

## TRANSISTORIZED MEGOHMMETER

NO WINDING. PUSH BUTTON TO READ.

500 v.—1,000 Megohms. Portable, c/w. batteries, probes and case. Superb instrument.

ONLY £23.10.0

P. & P. 7/6.

500v—500mΩ Mains operated insulation tester. Designed for continuous use £25.0.0



Write for illustrated brochure.

I.M.O.  
(ELECTRONICS) LTD.

(Dept. WW1), 313 Edgware Road, London, W.2. PADDington 2233/4

**FROM STOCK!****20 amp 24 volt  
HEAVY DUTY  
SUPPLY UNIT**

Made at a cost of approx. £100 by S.T. & C. Ltd. Essential equipment for Electronic Engineering, Research Laboratories, Schools. Ideal for battery charging etc. Guaranteed for 20 amps. OUTPUT: 24 v. D.C. variable up to 20 amps and trickle charge. INPUT: A.C. 100/260 v. 45/65 cycles. Input and output fully fused. Size: 16 x 24 x 32 in. high. In heavy gauge steel grey cabinet.

**ONLY £27.10.0**

Packing &amp; Carr. 40/-.

**Latest Miniature '88' Set  
WALKIE TALKIE**

Manufactured to exacting specifications by E. K. Cole & Co.

Transmitter/Receiver. Crystal controlled 4-frequency set.

Weights only 5½ lbs. (approx.). Measures 3½ in. x 5½ in. x 9 in.

Operates from standard dry battery—H.T./L.T. (Vidor L5537). 14 current series B7G valves used. Complete with valves and crystals.



Details and prices of all accessories on request.

Supplied by

**ONLY  
£10.0.0****I.M.O. (ELECTRONICS) LTD.**

(Dept. WW1), 313 Edgware Road, London, W.2  
PADDINGTON 2233/4

**NEW from PITMAN****AN ELECTRONIC ORGAN  
FOR THE  
HOME CONSTRUCTOR**

Alan Douglas, M.I.E.E.E.

A very popular "how to make it" book. Shows exactly what is involved in work and materials (a list of sources of supply is included) in constructing an inexpensive instrument for use in the home.

New 2nd edition 20s net


available from all booksellers

Pitman, Parker Street, London, W.C2.

1WW-134 FOR FURTHER DETAILS.

**"SPEARETTE"**

PRINTED CIRCUIT SERVICING RACK

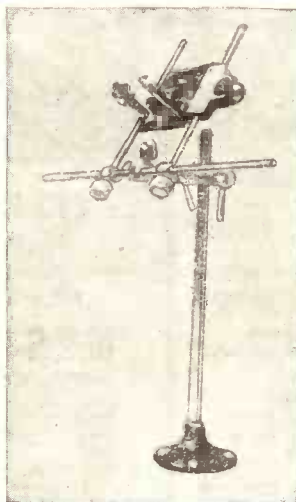

THE ELECTRONIC ENGINEER'S THIRD HAND  
WHEN ASSEMBLING OR SERVICING PRINTED  
CIRCUIT PANELS.

FULL ADJUSTMENT IN ALL PLANES

Details of this and other aids:

**SPEAR ENGINEERING CO. LTD.  
WARLINGHAM, SURREY**

Tel.: Upper Warlingham 2774

1WW-135 FOR FURTHER DETAILS.

**HARVERSON AMPLIFIER BARGAINS****Special Offer of Manufacturers Surplus  
2 VALVE GRAM AMPLIFIERS**

Valves: UY85 Rectifier and UCL82 Triode/Pentode giving 3½ watts output. Overall chassis size (inc. valves) 5in. high x 5½in. wide x 2in. deep. Each amplifier New and Tested and supplied complete with valves, 3 ohm output transformer and knobs for tone and volume on/off controls.

**ONLY 37/6** P. & P. 3/6.

Can be used with 80 v. motor tap or 1.5k mains dropper 2/6 extra if required. Owing to the limited number available and the extremely high value we regret we cannot enter into any correspondence.

**TWO VALVE GRAM AMPLIFIER ON PRINTED  
CIRCUIT BOARD**

(UY85, UL84.) Can be used with 80v. tap off motor. O.P. trans. Volume and Tone Control. Size 6½in. wide x 2in. deep x 3½in. high overall. **ONLY 39/6**. P. & P. 2/6. Mains dropper res. for filaments if required, 2/6

**SPECIAL OFFER—  
HIGH GRADE TWO-STAGE GRAM  
AMPLIFIERS**

Made by very well-known manufacturer. Using a double-wound mains transformer (fully isolated chassis) with tapped primary, full wave contact cooled rectifier, and Mullard ECL82 triode-pentode valve. 3 watt output. Separate tone and volume controls. Overall size 6½in. wide x 3in. deep x 4½in. high. Each amplifier Brand New and tested and supplied complete with valves, 3 ohm output transformer and knobs. **PRICE 49/6**. P. & P. 4/-.

**BRAND NEW 3 OHM LOUDSPEAKERS**

2½in. 12/6; 5in. 12/6; 6½in. 15/-; 8in. 21/-; 10in. 25/-; 12in. 27/6 (15 ohm 12 inch 30/-). 10in. x 6in. 26/-  
Latest type E.M.I. 13½in. x 8in. speaker with high flux ceramic magnet. 11,000 gauss. Aluminium centre cone. 10 watts, 50 c/s to 10 kc/s 42/- P. & P. up to 6in. 1/6; over 6in. 2/6 per speaker.

**SPECIAL OFFER!! BRAND NEW HEAVY  
DUTY 12 INCH SPEAKERS**

Response 45 c/s-13 kc/s. 1½in. voice coil. Available in 3 or 15 ohm. Guaranteed full 15 watts British rating. Heavy cast aluminium frame. These are current production by world famous maker and as they are offered well below list price we are not permitted to disclose the name.

LIMITED NUMBER ONLY.  
UNREPEATABLE AT 89/6. P. & P. 5/-.  
Also 25w guitar model available at £5.5.0

**BARGAIN OFFER CORNER**

**ROLA-CELESTION** approx. 9in. x 6in. 3 ohm middle register speaker, 10/6. P. & P. 2/6.

**MAINS TRANSFORMER.** Drop thru' type. Tapped primary 110 v., 200 v., 220 v., 240 v., 320-0-320 v. at 80 mA and 6.3 v. at 3 amps. Generous core. Stack size 3½ x 2½ x 1½in. Weight 4lb. **ONLY 15/-**. P. & P. 3/6.

**ACOS CRYSTAL MIKES.** High imp. For desk or hand use. High sensitivity, 18/6. P. & P. 1/6.

**TSL CRYSTAL STICK MIKE.** Listed at 45/-. Our price 18/6. P. & P. 1/6.

**CONTACT COOLED BRIDGE RECTIFIERS.** 250-volts at 125 mA. Size 1½in. x 1½in. x ¾in. 7/6. P. & P. 1/-.

**TRANSISTOR DRIVER and O/P TRANSFORMERS.** (Tapped 3 ohms and 15 ohms output), plus 4 suitable Transistors giving approx. 1 watt output. 2 f. P. & P. 2/6.

**T.C.C. SUPPRESSOR CONDENSERS.** 250 v. A.C. .005 + .005 x .1. In tubular can. 1½in. long x ¾in. dia. 2 for 3/-. Post free.

**5,000 MFD. 12 V. WKG. CONDENSERS.** Size 3 x 1in. diam. 2/- each. P. & P. 6d. each.

**T.V. OR AMPLIFIER EDGE CONTROL PANELS.** Two 500k. Lin. Pots; one 500k. Log; one D/P mains switch. Brand new 3/6 per panel. P. & P. 1/-.

**Matched pair of 2½ watt Transistor Driver and Output Transformers.** Stack size 1½in. x 1½in. x ¾in. Output trans. tapped for 3 ohm and 15 ohm output. 10/- pair plus 2/- P. & P., worth double.

**TWIN TELESCOPIC AERIAL**

Comprising two 3-section heavily chromed rods. Closed 12in. each extending to 32in. each. Completely adjustable from vertical to horizontal. Supplied complete with universal mounting bracket, approx 36in. of coax and standard coax plug. Suitable for F.M. or T.V. 12/6 plus 2/- P. & P.


**MARCONI QUARTZ CRYSTALS Types ZHB.** Still available as previously advertised.

**Harverson Surplus Co. Ltd. ▶**



**3-VALVE AUDIO AMPLIFIER**


**MODEL HA34**



Designed for Hi-Fi reproduction of records. A.C. Mains operation. Ready built on plated heavy gauge metal chassis, size 7 1/2 in. w. x 4 in. d. x 4 1/2 in. h. Incorporates ECC83, EL84, EZ80 valves. Heavy duty, double wound mains transformer and output transformer matched for 3 ohm speaker, separate Bass, Treble and volume controls. Negative feedback line. Output 4 1/2 watts. Front panel can be detached and leads extended for remote mounting of controls. The HA34 has been specially designed for us and our quantity order enables us to offer them complete with knobs, valves, etc., wired and tested for only **£4.50** P. & P. 5/-.

**STEREO AMPLIFIER**

Incorporating 2 ECL82s and 1 EZ80, heavy duty, double wound mains transformer. Output 4 watts per channel. Full tone and volume controls. Absolutely complete.



**BARGAIN PRICE ONLY**  
**£4.19.6** P. & P. 5/-.

**6 TRANSISTOR AND DIODE SUPERHET**

A first-class 2 waveband transistor superhet. ● Printed circuit panel (size 8 1/2 x 2 1/2 in.). ● 3 pre-aligned I.F. transformers. ● High-gain Ferrite rod aerial. ● All First-grade transistors. ● Car aerial winding. ● Push-pull output. ● All parts supplied with simple instructions.

All parts sold separately. Set of parts if purchased at one time **ONLY £4.50** P. & P. 2/6  
Circuit diagram 1/6 (Free with set of parts).

**35 OHM SPEAKERS**

Suitable for use with above. 2 in. Goodmans. Ideal replacement for most pocket portables 8/6; 3 1/2 in. 12/6; 5 in. 17/6; 7 x 4 in. 21/- P. & P. 1/6 per speaker.

**PORTABLE CABINET**

Size approx. 9 1/2 x 6 1/2 x 3 1/2 in. Suitable for above using 3 1/2 in. speaker. 25/- P. & P. 2/-.

**COIL AND TRANSFORMER SET FOR TRANSISTOR SUPERHET**

3 I.F. transformers, one oscillator coil, one driver transformer and wound Ferrite aerial (med., long and car aerial coupling), 32/6 complete, post 1/- 6 transistor printed circuit board to match, 8/6, post 9d. Circuit diagram 1/6 extra.

**SPECIAL TRANSISTOR BARGAINS ALL BRAND NEW**

GET 15 (Matched Pair) 15/- V15/10P 10/- OC71...5/- OC76...6/- AF117...7/6 ORP12...10/6 Set of Mullard 6 transistors, OC44, 2-OC45, OC81D matched pair, OC81 25/-.

**EDISWAN MAZDA**

PXA101...6/6 XA103...6/6 R.F.I Pack: 1-PXA102 Mixer; 2-PXA101 I.F. Amp.; (Equiv. OC44 and OC45)..... 10/6 R.F.2 Pack: 2-PXA101 I.F., 1-PXA102 Osc.; 1-PXA102 Mixer..... 12/6 L.F.6 Pack: Consisting of PXB113 Driver, Matched pair PXC171; mounted complete with heat sinks (Equiv. OC81D and OC81)..... 12/6  
**ALL TRANSISTORS POST FREE**

**TAPE DECKS**

**B.S.R. MONARDECK** (Single speed) 3 1/2 in. per sec., simple control, uses 5 1/2 in. spools, £6/15/-, plus 5/6 carr. and ins.  
**COLLARO STUDIO DECK** 3 motors, 3 speeds, push button control. Up to 7 in. spools £10/10/- P. & P. 5/6. (Tapes extra on both.)

**QUALITY RECORD PLAYER AMPLIFIER**

A top-quality record player amplifier. This amplifier (which is used in a 29 gn. record player) employs heavy duty double wound mains transformer, ECC83, EL84, EZ80 valves. Separate Bass, treble and volume controls. Complete with output transformer matched for 3 ohm speaker. Size 7 in. w. x 2 1/2 in. d. x 5 1/2 in. h. Ready built and tested. **PRICE 69/6**. P. & P. 3/6.  
**ALSO AVAILABLE** mounted on board with output transformer and 6 in. speaker ready to fit into cabinet below. **PRICE 89/6**. P. & P. 4/6.

**QUALITY PORTABLE R/P. CABINET**

Uncut motor board. Will take above amplifier and B.S.R. or GARRARD Autochanger or Single Record Player Unit. Size 18 x 14 x 8 1/2 in. **PRICE £39/6**. Carr. 5/-.

**EMBASSY PORTABLE RECORD PLAYER CABINET**

Will accommodate amplifier, up to 7 x 4 in. speaker and B.S.R. or GARRARD auto-changer or single player unit. Attractive rexine covered finish. Overall size 17 x 15 x 8 1/2 in. with uncut motor board. **PRICE 69/6**. Carr. 5/-.

**4-SPEED PLAYER UNIT BARGAINS**

All brand new in maker's original packing.

**SINGLE PLAYERS**

B.S.R. TU112..... £310/- Carr. 3/6  
B.S.R. GU7 with unit mounted pickup arm. £41/8/3. Carr. 4/-.

**AUTO. CHANGERS**

B.S.R. UA14 £5/19/6. B.S.R. UA15/16... £6 19 6  
Latest B.S.R. UA25 Super slim..... £6 2 6  
Latest GARRARD AT5 Mono £8/8/0. Stereo £9/9/0.  
GARRARD AT6 Mono..... £10 10 0  
GARRARD Auto-Slim £6 10 0. Carr. 5/- on each.

**BRAND NEW CARTRIDGE BARGAINS!**

**B.S.R. TC85** High output compatible **STEREO CARTRIDGE**. Brand new. Complete Stereo/LP/78 sapphire styli and universal mounting bracket. Original list price 44/11. Our price 22/6. P. & P. 1/-.

**RONETTE STEREO 105 CARTRIDGE**

Stereo/LP/78 complete with two sapphires. Original list price 67/9. Our price 24/- P. & P. 1/-.

**COLLARO HI-FI STEREO CERAMIC t/o CARTRIDGE** Type "C" complete with universal bracket and styli for Stereo/LP/78. Original list price 59/8. Our Price 25/- P. & P. 1/-.

**E.M.I. 4-speed Player and P.U.**



**FURTHER HUGE PURCHASE** enables us to offer these at **67/6** P. & P. 4/6.

Heavy 8 1/2 in. metal turntable. Low flutter performance 200/250 v. shaded motor with tap at 45 v. for amplifier valve filament if required. Turn-over LP/78 head.

**HIGH GAIN 4 TRANSISTOR PRINTED CIRCUIT AMPLIFIER KIT**


**Type TAI**

● P e a k output in excess of 1 1/2 watts.  
● All standard British components.  
● Built on printed circuit panel, size 6 x 3 in.  
● Generous size Driver and Output Transformers.  
● Output transformer tapped for 3 ohm and 15 ohm speakers. ● Transistors (GET 114 or S1 Mullard OC81D and matched pair of OC81 o/p).  
● 9 volt operation. ● Everything supplied, wire, battery clips, solder, etc. ● Comprehensive easy to follow instructions and circuit diagram 1/6 (Free with Kit). All parts sold separately. **SPECIAL PRICE 45/-**. P. & P. 2/6. Also ready built and tested, 52/6. P. & P. 2/6. A pair of TAIs are ideal for stereo.

**SPECIAL PURCHASE! TURRET TUNERS**

by famous maker  
Brand new and unused. Complete with PCC84 and PCF80 valves, 34-38 Mc/s. I.F. Biscuits for Channels 1 to 5 and 8 and 9. Circuit diagram supplied. **ONLY 25/-** each. P. & P. 2/6.

**10/14 WATT HI-FI AMPLIFIER KIT**



A stylishly finished monaural amplifier with an output of 14 watts from 2 EL84s in push-pull. Super reproduction of both music and speech, with negligible hum. Separate inputs for mike and gram allow records and announcements to follow each other. Fully shrouded section wound output transformer to match 3-15(2) speaker and 2 independent volume controls, and separate bass and treble controls are provided giving good lift and cut. Valve line-up 2 EL84s, ECC83, EF86, and EZ80 rectifier. Simple instruction booklet 1/6. (Free with par.s.) All parts sold separately. **ONLY £19/6**. P. & P. 6/6. Also available ready built and tested complete with standard input jack sockets, £8/15/- P. & P. 6/6.

**BRAND NEW** Vynide covered wooden **CARRYING CASE** for above. Size 13 1/2 x 9 x 8 in. with sloping front panel. Weight 4 1/2 lbs. **BARGAIN PRICE 28/6**. P. & P. 4/-.

**A NEW HARVERSON KIT FOR THE HOME CONSTRUCTOR**




A really excellent, all purpose A.C. mains 200/240 v. **AMPLIFIER KIT**. TYPE HSL 'FOUR' 3 VALVE, 4 WATT USING ECC83, EL84, EZ80 VALVES.

Special features include:  
★ Heavy duty double-wound mains transformer with electrostatic screen. ★ Separate Bass, Treble and Volume controls, giving fully variable boost and cut with minimum insertion loss.  
★ Heavy negative feedback loop over 2 stages ensures high output at excellent quality with very low distortion factor. ★ Suitable for use with guitar, microphone or record player.  
★ Provision for remote mounting of controls or direct on chassis. ★ All this builds on to a chassis size only 7 1/2 in. wide x 4 in. deep. Overall height 4 1/2 in. ★ All components and valves are brand new. ★ Very clear and concise instructions enable even the inexperienced amateur to construct with 100% success. ★ Supplied complete with valves, output transformer (3 ohms only), screened lead, wire, nuts, bolts, solder, etc. (No extras to buy). **PRICE 79/6**. P. & P. 5/-.  
Comprehensive circuit diagram, practical layout and parts list 2/6 (free with kit).

**HARVERSON'S F.M. TUNER Mk. I**

● F.M. tuning head by famous maker.  
● Guaranteed non-drift.  
● Permeability tuning.  
● Frequency coverage 88-100 Mc/s.  
● OAB1 balanced diode output.  
● Two I.F. stages and discriminator. ● Attractive maroon and gold dial (7 x 3 in. glass). ● Self powered, using a good quality mains transformer and valve rectifier.  
● Valves used ECC85, two EF80s, and EZ80 (rectifier). ● Fully drilled chassis. ● Size of completed tuner 8 x 6 x 5 1/2 in. ● All parts sold separately. Set of parts if purchased at one time £5/19/6, plus 8/6 P.P. and ins. Circuit diagram and instructions 1/6 post free. **Mark II** Version as above but complete with magic eye, front panel and brackets, £6/12/6. P. & P. 8/6.  
**Mark III** Version as Mark I but with output stage (ECL82) and tone control. £7/7/- P. & P. 8/6.  
**Handsome Metal Cabinets**. Choice of Grey, Black, or Green. To fit Mark I, 25/- P. & P. 2/6. To fit Mark II, 17/6. P. & P. 2/6.



**BRAND NEW CYLON FM. TUNER HEAD**

Permeability tuned 88-100 Mc/s. Printed Circuit. A completely screened unit ready for direct mounting in chassis. 10.7 Mc/s. I.F. O/P Supplied complete with ECC85 valve and full circuit diagram. Aerial input circuit suitable for either 75 ohm unbalanced or 300 ohm balanced. Size only 3 in. w. x 2 1/2 in. d x 1 1/2 in. h. (2 1/2 in. high with valve). Limited number only at 27/6. P. & P. 1/6. **ALSO AVAILABLE** 10.7 Mc/s. I.F. trans. and disc. trans. 11/6 pair. P. & P. 1/6.

**GÖRLER F.M. TUNER HEADS**

Tuning range 88-100 Mc/s. 10.7 Mc/s. I.F. 15/-, plus 1/9 P. & P. (ECC85 valve, 8/6 extra).


**LOOK OPPOSITE FOR MORE BARGAINS**

**HARVERSON SURPLUS CO. LTD.**  
170 HIGH ST., MERTON, S.W.19. **CHERRYWOOD 3985**  
Open all day Saturday Early closing Wed., 1 p.m.  
A few minutes from South Wimbledon Tube Station. (Please write clearly)  
PLEASE NOTE: P. & P. CHARGES QUOTED APPLY TO U.K. ONLY. P. & P. ON OVERSEAS ORDERS CHARGED EXTRA. (Please enclose stamped addressed envelope with all enquiries.)

# Why

## NOT BUILD ONE OF OUR PORTABLE TRANSISTOR RADIOS ...

BACKED BY OUR SUPER AFTER SALES SERVICE



### NEW TRANSONA FIVE

★ 7 Stages—5 transistors and 2 diodes.


Covers M. and L. Waves and Trawler Bands, a feature usually found in only the most expensive radios. On test, Home, Light, 208, and many Continental stations were received loud and clear. Designed round super-sensitive Ferrite Rod Aerial and new type fine tone super-dynamic 2½in. speaker, attractive case in grey plastic with red grille. Size 6½ x 4½ x 1½in. approx. (Uses 1289 battery available anywhere.)

Total cost of all parts. NOW ONLY **42/6** P. & P. 3/6.  
Parts price list and easy build plans 2/-.

### POCKET FIVE

★ 7 Stages—5 transistors and 2 diodes. Covers Medium and Long Waves and Trawler Band, a feature usually found in only the most expensive radios. On test, Home, Light, Luxembourg and many Continental stations were received loud and clear. Designed round super-sensitive Ferrite Rod Aerial and fine tone 2½in. moving coil speaker, built into attractive black case with red speaker grille. Size 5½ x 1½ x 3½in. (Uses 1289 battery, available anywhere.)

Total cost of all parts now only **42/6** P. & P. 3/6.  
Parts price list and easy build plans 1/6.




42/6 P. & P. 3/6.

### ROAMER SIX NEW!!

★ 8 stages—6 transistors and 2 diodes. ★ 6 waveband. ★ Now with Philco micro-alloy R.F. transistors.

Listen to stations half a world away with this 6 waveband, portable. Tunable on M and L waves, Trawler Band and three Short waves. Push-pull output. Sensitive ferrite rod aerial and telescopic aerial for short waves. Top grade transistors, 3-inch speaker, handsome case with gilt fittings. Size 7½ x 5½ x 1½in. ★ Extra band for easier tuning of LUX, etc.

Total cost of all parts now only **£3.19.6**  
Carrying Strap 1/6 extra. P. & P. 3/6.




Parts price list and easy build plans 2/-.

### ROAMER SEVEN Mk. III

8 WAVEBAND PORTABLE OR CAR RADIO AMAZING PERFORMANCE AND SPECIFICATION ★ NOW WITH PHILCO MICRO-ALLOY R.F. TRANSISTORS.

★ 9 stages—7 transistors and 2 diodes. Covers M. and L. Waves, Trawler Band and two Short Waves to approx. 15 metres. Push-pull output for room-filling volume from rich toned heavy duty 'Celestion' speaker. Air spaced ganged tuning condenser. Ferrite rod aerial for M. & L. Waves and telescopic aerial for S. Waves. Real leather look case with gilt trim and shoulder and hand straps. Size 9 x 7 x 4in. approx. The perfect portable and the ideal car radio. (Uses 1287 battery available anywhere.)

Total cost of all parts NOW ONLY **£5.19.6** P. & P. 5/6.



Parts price list and easy build plans 3/-.


### SUPER SEVEN

★ 9 Stages—7 transistors and 2 diodes.

Covers M. and L. Waves and Trawler Bands. The ideal radio for home, car or can be fitted with carrying strap for outdoor use. Completely portable—built-in ferrite rod aerial for wonderful reception. Special circuit incorporating 2 R.F. stages, push-pull output, 3in. speaker (will drive larger speaker). Size 7½ x 6½ x 1½in. (Uses 9v. battery, available anywhere.)

Total cost of all parts now only **£3.19.6**

Parts price list and easy build plans 2/- P. & P. 3/6.



### NEW!! TRANSONA SIX

★ 8 stages—6 transistors and 2 diodes.

A top performance receiver covering full M. & L. Waves and Trawler Bands. Push-pull output. High-grade speaker makes listening a pleasure. Ferrite rod aerial. Many stations listed in an evening including Luxembourg loud and clear. Attractive case in grey with red grille. Size 6½ x 4½ x 1½in. (Uses PP4 battery, available anywhere.)


Total cost of all parts **59/6** P. & P. 3/6.  
Parts price list and easy build plans 2/-.



### MELODY SIX NEW!!

★ 8 stages—6 transistors and 2 diodes. Our latest completely portable transistor radio covering M. and L. waves. Incorporates pre-tagged circuit board, 3in. heavy duty speaker, top grade transistors, volume control, tuning condenser, wave change slide switch, sensitive 6in. ferrite rod aerial. Push-pull output. Wonderful reception of B.B.C. Home and Light, 208, and many Continental stations. Handsome leather look pocket size case, only 6½ x 3½ x 1½in. approx. with gilt speaker grille and hand and shoulder straps.

Parts price list and easy build plans 2/- Total cost of all parts **£3.9.6** P. & P. 3/6.



All components used in our receivers may be purchased separately if desired. Parts price lists and easy build plans supplied free with sets of parts or available separately at prices stated. OVERSEAS POST 10/-

## RADIO EXCHANGE

61, HIGH ST., BEDFORD. Phone: 2367

Callers side entrance Barratts Shoe Shop. Weekdays 9-5 p.m. Sats. 9-12.30.

## CONSTRUCTORS BARGAINS

35/- only. Parcels of fantastic value. Carriage free. Due to recent bulk purchases of electronic gear, one and a half thousand items including nuts, bolts, self tapping screws, condensers, resistances, cable, car suppressors, circuit board, test bulbs and many other items.

## VARIACS

Carriage Free. Ex Equipment. First Class Order. 2 amp £3; 3 amp £4; 2kVA £9.

## OSCILLOSCOPES

Airmec 723	£30
Cossor Double Beam 339	£20
Nagar Double Beam	£90
Mullard LI40/3	£100
Solatron	£27

## MISCELLANEOUS

Headsets for 209 Receiver 12/6; Spare valve kits for 209 Mark II £1.

Logic Units by Mullard, contains two transistors, type OC84, ferrite coils, resistances, condensers, brand new I7/6.

## FOR CALLERS ONLY

1,000 Cabinets, all shapes and sizes. Wonderful collection of latest electronic gear, meters, transistors, transformers, etc.

Call at Yorkshire's Newest Electronic Centre.

## M.A.C. LIMITED

126 NORTH STREET, LEEDS. 'Phone: 26026

1W-136 FOR FURTHER DETAILS.

## BRAND NEW AM/FM (V.H.F.) RADIOGRAM CHASSIS AT £13.13.0 (CARRIAGE PAID)

A.C. ONLY. Chassis size 15 x 6½ x 5½in. high. New manufacture. Dial 14½ x 4in. in 2 colours, predominantly gold

Pick-up, Extension Speaker, Ac., E., and Dipole Sockets, Five "piano" push buttons — OFF L.W., M.W., F.M. and Gram. Aligned and tested. With all valves and O.P. Transformer, Tone Control fitted. Covers 1,000-1,900 M; 200-500 M; 88-98 Mc/s Valves E280 rect., ECH81, EF89, EABC80, EL84, ECC85. 10 x 6in. ELLIPTICAL SPEAKER 25/- to purchasers of this chassis. TERMS: £3/10/- down and 5 monthly payments of £2/4/-.

ALTERNATIVE DESIGN. LW 1,000-2,000M; SW 9-15 mc/s; MW 190-475M VHF 87-100 mc/s; gram position. Dial dark brown and gold. Otherwise similar to above chassis. Price £15/15/- (carr. paid), terms £3/10/- down and 6 monthly payments of £2/4/-.

### PUSH-PULL OUTPUT MONO-AURAL AMPLIFIER

Output Transformer for 2-3 ohm speaker. Controls are bass, treble and volume. Output 8 watts. Input 200-250 v. A.C. Valves E280; ECC83 and 2-EL84. Overall size 12" x 3½" (chassis) plus knobs x 5" over valves. The front control panel is normally screwed to the chassis but may be removed and used as a 'flying panel' Price £5/5/-. (Post 6/-).

### BATTERY ELIMINATOR

For 4 low consumption valves (96 range) 90 v. 15 mA. and 1.4 v. 125 mA., 45/-(4/- post), 200-250 v. A.C. Also for 250 mA. 1.4 v. and 90 v. 15 mA. at same price. Two units to replace existing batteries.

### TAPE RECORDER AMPLIFIER

Fully built. Front panel 12½" x 3". Chassis size 10½" x 5" x 4". Valves EF86, ECC83 and 2EL84. Controls (1) MIC. Vol. (2) Tuner/P.U. Vol. (3) Play back or monitor. (4) Tone. 2 jack sockets for Tuner/P.U. and MIC-switch for superimpose. Separate power pack containing transformer and rectifier. For Colliaro studio deck only. Price £3/14/-. (6/- P. & P.)

Send 6d. for 20-page illustrated catalogue. All New Goods. Delivered by return (C.O.D. 2/- extra).

ALL ITEMS GUARANTEED 12 MONTHS. VALVES 3 MONTHS

We regret we cannot execute overseas orders.

## GLADSTONE RADIO

66 ELMS ROAD, ALDERSHOT, HANTS, Aldershot 22240. (1 min. from station and buses.) Closed Wednesdays.

## NEW LIST OF BARGAINS

Transistor ferrite rod aerial with medium and long wave coils with circuit, 7/6.

Oscillator Coil and set of 3 I.F. transformers for transistor set with circuit, 12/6.

Tuning Condenser to suit, air-spaced, with trimmers, 9/-.

Ditto, but sub. min. 7 mm. 10/- the set, two-gang condensers to suit 8/6 (request sub. min. circuit).

Midget 3in. P.M. Loudspeaker. 3 ohm. 12/6, 80 ohm. 13/6.

Midget 208 pF + 178 pF two-gang Tuning Condenser with trimmers for transistor set. Price 9/-.

Push-Pull Transformer. Sub-miniature. 8/6.

.0005 mfd. Single Tuning Condenser. Solid dielectric 1in. spindle for transistor of Crystal set, with spindle tapped 6 BA., 2/6.

46 Sets (Receiver/Transmitter pack set). Unused sets complete except for crystals. 19/6. Post 3/-.

Battery Charger Kit. Comprises 5 amp. transformer, 5 amp. rectifier, metal case and meter to charge 6 or 12 volt batteries up to 5 amps. With variable charge rate, 39/6 each. 3/6 post & insurance.

Mains Transformer. 250-0-250 at 80 mA. 6.3 volts 5 a. (normal mains input), 12/6 each. Carr. 2/6.

Output Transformer. Standard pentode matching type, 4/6 each; 48/- per doz.

Slide Switch. Sub-miniature but duplt., 2/-; 18/- doz.

T.C.C. or Dubilier Tubular Condensers.

.5 mfd. 500v.	10/- doz.
.25 mfd. 500v.	7/6 doz.
.25 mfd. 350v.	6/- doz.
.05 mfd. 500v.	5/- doz.
.0001 mfd. 1000v.	5/- doz.
.001 1000v.	6/- doz.
.002 1000v.	7/6 doz.
.005 1000v.	8/- doz.
.02 750v.	8/6 doz.
.01 1000v.	10/- doz.

Battery Charger Rectifier. Selenium 12-15 v. 5 amp. 9/6.

Metal Chassis. Punched for Mullard 510 Amplifier, complete with inner screening sections and stove enamelled. 12/6 set.

Unbreakable Mains Lead. Type of lead fitted to electric razors makes fine lead for test meters and any other devices where subject to continuous bending. Twin figure eight construction, soft cream P.V.C. covered. Normally costs 2/- per yard. Three 6ft. leads for 2/-.

Filament Transformers, 6.3 v., 1 1/2 amp. 6/6.

Neon Lamp—midget wire ended, filial mains tester, etc. 2/-; Ex-Govt. 1/6.

Phillips Trimmers. 0-30 pF. 1/- each; 9/- doz.

Heavy Duty Test Prods.—red and black with plug-in lead attachments, 6/6.

Low Resistance Headphones. Ideal crystal sets, etc. 7/6, plus 2/6.

Cold Cathode Valve CV 413. Voltage regulator or trigger switch—unused but ex-equipment, 2/- each.

Tag Panels. Ideal for construction, experimental circuits, etc. 3 of each of 12 different types, 5/-; Post 1/6.

Slide Panel Mounting Fuses, with carrier, 5 amps. 2/-; each; 15 amp. 2/6 each.

.1 mfd. 350 v. Small tubular metal-cased condenser made by Dubilier, 2/6 doz.

Ozone Outfit—for removing smells and generally improving any oppressive atmosphere. Kit consists of Phillips ozone lamps and mains unit, only needs box. 19/6, plus 3/6 postage and insurance.

Black Light Unit. 125 watt intensity, comprises quartz lamp, adjustable lamp holder and 125 watt choke. Only 29/6 plus 6/6 carriage and insurance.

Packard Bell Pre-Amp. Contains a relay, push-pull input and output transformers and many useful spares. Less valves 6/6 each plus 2/6 post and insurance.

Fridge Handles. With Yale type locking mechanism, two keys, and striking plate, 3/9, plus 2/- post, 8 for 30/-; Post free.

0-1mA. Meter, made by the American Westinghouse Co., 3in. diameter, flush mounting scale calibrated in volts, 25/-; plus 2/- post and insurance.

Ferranti Fire Bar. 500 watt 10in. 3/6 each, plus 1/6 post. Three or more post free.

B7G Valve Holder. Best make (Amphenol) 3/- dozen, post 1/6; 3 doz. post free.

Precision Wheatstone Bridge—opportunity occurs to build 100k. wire wound 15 watt potentiometer, price 5/- plus 1/- postage.

Clydon Turret Tuner. 35 mc/s. with band 1 and band 3 coils. Brand new, 9/6 each, post 2/6.

## GOOD COMPANION

### Mark III B

The 6-transistor set with the 8-transistor performance.

Incorporating all the latest refinements. Anyone who can solder can make it.

Many thousands already in use all over the country.

Full coverage of Long and Medium wave-bands.

Fine looking cabinet, size 11x8x3 1/2in. Q.P.P. output approx. 750 MW. Excellent reception of difficult stations like 208.

Variable feedback gives excellent tone.



ONLY £5.19.6 plus 4/- post and insurance.

## OUR BARGAIN OF THE YEAR



A Complete kit of parts to build this 6-transistor 2 wave superhet receiver at only 39/6, plus 3/6 post and insurance.

### "CORONET Mk. IV"


It fully covers the medium-wave band and that part of the long-wave band to bring in B.B.C. Light. The circuit includes a highly efficient

slab aerial and 2 1/2in. P.M. speaker. Supplied complete with carrying case.

Overall size approximately 4 1/2 x 2 1/2 x 1 1/2in.

## INFRA-RED HEATERS

Make up one of these latest type heaters. Ideal for bathroom, etc. They are simple to make from our easy-to-follow instructions—uses silica enclosed elements designed for the correct infra-red wavelength (3 microns). Price for 750 watt element, all parts, metal casing as illustrated 19/6, plus 2/6 post and insurance.




## THIS MONTH'S SNIP

Superhet Heart, comprising a three wave-band coil pack, 3 365 kc. I.F. transformers, valves types 6X4 frequency changer, 6K7 I.F.T. and 9Q7 D.D.T. and 3 octal valve-holders with circuit diagram showing how to make super-het receiver or tuner unit, to drive amplifier, tape recorder, etc. See Retail value over £4, this month's snip offer, all for 19/6 plus 3/6 post and insurance.

## CABINET BARGAIN

Cabinet as illustrated, less knobs, ideal if you are making small radio, office intercom, amplifier, etc. Has the modern look, originally sold at 29/6. Limited quantity available at 9/6 plus 2/6 postage.



LAST OF THESE!

## CABINETS & PICK-UPS

Made for a famous company intending to make a battery Record Player but changing their minds. This is an extremely fine looking cabinet, must have cost at least £2 to make. It is complete with handle and fasteners as illustrated. Also included in the parcel is a Cosmocon pick-up with crystal cartridge and scratchy stylus. Both items new and perfect.

ONLY 19/6 plus 4/6 post and insurance



## POWER PACK FOR TRANSISTORS

Designed to operate transistor sets and amplifiers. Adjustable output 6 v.—9 to 12 volts for up to 500 mA. (class B working). Takes the place of any of the following batteries: PP1, PP3, PP4, PP6, P17, P19, and others. Kit comprises: mains transformer, rectifier, smoothing and load resistor, 5,000 and 100 mfd. condensers, zener diode and instructions. Real snip at only 14/6 plus 2/6 post.

## FLUORESCENT LIGHTING BARGAINS

Complete 40 watt Slimline white enamelled fitting, ready for use with choke control gear, radio suppressed starter and tube. Originally intended to sell at £3/15/-, offered at only 39/6 plus 5/- carriage and insurance; two or more carriage free. Ditto 6ft. 80 watt 49/6 plus 7/6 carriage and insurance, two or more carriage free.


## 400 watt FLUORESCENT LIGHTING OUTFIT

Bulb type 400 watt lamp to hang from ES lampholder. Intended for street-lighting. Ideal large open space, yard, etc. Complete with choke 40/- plus 7/6 carriage and insurance.

Type "B" 15 amp. This is a 17in. long rod type made by the famous Sunvic Co. Spindle adjusta this from 80-550°F. Internal Screw alters the setting so this could be adjustable over 30° to 1000°F. Suitable for controlling furnace, oven, kiln, immersion heater or to make flame-stat or fire alarm. 8/6 plus 2/6 post and insurance.

## MAKING AN F.M. TUNER

Available, at present, is a very nice cadmium-plated P.M. Tuner chassis with holes punched for coils and other components, also a nicely printed perspex front, calibrated usual F.M. frequencies. Real bargain 6/6 plus 2/- or with two-gang tuning condenser 10/- plus 2/- postage.



## SPEAKER BARGAIN

12in. High fidelity loudspeaker. High flux permanent magnet type with either 3 or 16 ohm speech coil. Will handle up to 10 watts. Brand new, by famous maker. Price 27/6, plus 3/6 post and insurance.



## Waterproof Heater Wire

16 yd. length. 70 watts. Self regulating temperature control, 10/- post free.

## TRANSISTOR SET CASE

Very modern cream cabinet, size 6 1/2 x 3 x 1 1/2in. with chrome handle, tuning knob and scale. Price 4/6, plus 1/6 postage.



## Building a Scope?



3in. oscilloscope tube. American made type No. 3EP7, base 6.3 v. 6 amp. heater electrostatic deflection, brand new and guaranteed, with circuit diagram of scope, 15/- each plus 2/6 post and insurance.

## Fluorescent Light Kits

For pinless lighting, etc. Kit consists of Super silent choke; 2 chrome clips to hold tube; 2 bi-pin holders for tube and starter with a starter holder. Kit A for 80 watt tube at 27/6. Kit B for 40 watt tube at 19/6. Kit C for 2x2ft. 20 w. lamp 25/-; Kit D for 1x2ft. 20 w. lamp 18/6. Post and insurance 2/6 per kit.

## Timer Kit

Special offer of all components except metal box to make mains operated interval timer for photography, etc., 12/6 plus 2/6 post.

## Simmerstat Heater Regulator

Suitable to control elements, heaters, soldering irons and boiling rings up to 2,500 watts. Complete adjustable, normal price 55/- each. Special snip price 12/6, plus 1/6 postage and insurance.

## THERMOSTATS

Type "A" 15 amp. for controlling room heaters greenhouse, airing cupboard. Has spindle for pointer knob, quickly adjustable from 30-80°F., 9/6 plus 1/- post. Suitable box for wall mounting, 5/-; P. & P. 1/-.



Type "C" is a small porcelain thermostat fitted to electric blankets, etc. 11 amp. setting adjustable by screw through side. 3/6; P. & P. 6d.

Type "D" We call this the Ice-state as it cuts in and out at around freezing point 2/3 amps. Has many uses, one of which would be to keep the loft pipes from freezing. If a length of our blanket wire (16 yds. 10/-) is wound around the pipes, 7/6; P. & P. 1/-.

Type "E" This is a standard refrigerator thermostat. Spindle adjustments over normal refrigerator temperatures, 7/6, plus 1/- post.

# ELECTRONICS (CROYDON) LIMITED

266 LONDON ROAD, WEST CROYDON, SURREY

Post orders to: 43 SILVERDALE ROAD, EASTBOURNE, SUSSEX

**TEST METERS**



**30,000 OHMS PER VOLT MODEL 500.** Reads voltages up to 1,000 D.C. at 30,000 ohms per volt and A.C. at 15,000 o.p.v.; D.C. current to 12 amps. Resistance to 60 Megs.; Decibels from -20 to +56; Incorporates internal buzzer for audible warning of direct shorts and flocking condenser for A.F. output measurements. Size 3 1/8 x 6 5/8 x 2 1/2 in. £8/19/6.

**2,000 OHMS PER VOLT MODEL TP-10.** Reads A.C. and D.C. volts up to 1,000; D.C. current to 500mA; Resistance to 1 Meg.; Capacitance to 1µF; Decibels from -20 to +36; Output jack for Audio measurements. Size: 3 1/2 x 5 1/4 in. £3/19/6.

**20,000 OHMS PER VOLT MODEL TP-55.** Reads voltages up to 1,000 D.C. at 20,000 ohms per volt and A.C. at 10,000 o.p.v.; D.C. current to 500mA; Resistance to 10 Megs.; Capacitance to 0.1µF; Decibels from -20 to +56. Size: 3 1/2 x 5 1/4 in. £5/19/6.

**MOVING COIL OMNI-DIRECTIONAL 50K IMPEDANCE MIKE.** Chrome plated with diecast frame. ONLY 99/6. (Post 2/6.)


**MOVING COIL 50K IMPEDANCE STICK MIKE.** A superb job. 75/-. (Post 2/6.)

**MOVING COIL STICK MIKE,** complete with heavy desk stand, and screened lead. ONLY 59/6. (Post 2/6.)

**B.C.A. TYPE AR.88D. RECEIVERS, BRAND NEW** in makers cartons with spares. £85. Carr. 30/-.

**TRANSISTORISED INSULATION TESTER** No handed operation, no cranking of generator 3 testing voltages 100, 250 and 500, to measure up to 500 Megohms. Complete with leather carrying case and test leads. ONLY £17/10/-. Illustrated details on request.

**VALVE VOLTMETER** D.C. Input Impedance 11 Megohms. 7 Voltage ranges, D.C. to 1,500, A.C. to 1,600 R.M.S., 4,200 Peak to Peak. Resistance 2 ohm to 1,000 Megohms. Centre zero setting for receiver alignment. Complete with A.C./D.C. probe and leads. Full illustrated details on request. ONLY £13/19/6 (Post 3/6d.).



**ACOS 39/1 STICK MIKE** with screened lead and table stand. ONLY 32/6. (Post 1/6.)

**CRYSTAL DESK MIKE** with screened lead and built-in stand. ONLY 15/-. (Post 1/6.)

**ADJUSTABLE MIKE STANDS** with heavy bases, and plated stems. Table type 29/6. Floor type 59/6.

**15 OHMS P.M. SPEAKERS.** Special Heavy Duty 12in., £5/5/-. Wharfedale W12EG 12in. for Bass Guitars, £17/10/-. 12in. wedge type speaker cabinet, £2/17/6. (Please add 6/- carr. all items.)

**NOMBREX INSTRUMENTS**

**TRANSISTORISED AUDIO GENERATOR.** 10-100,000 c/s. Sine or square wave. Post paid with battery £16/15/-.

**TRANSISTORISED SIGNAL GENERATOR.** 150 kc/s-350 Mc/s. Better than 2%. Post paid with battery £9/10/-.

**TRANSISTORISED RESISTANCE CAPACITY BRIDGE.** 1µ-100meg. 0.1 pf. 100µf. Leakage test and visual null indicator. Post paid with batt. £8/5/-.

**MAINS OPERATED TRANSISTOR POWER SUPPLY UNIT.** Regulated output 1-15 v. up to 100 mA. Overload protection. Post paid, £6/10/-.

**TRANSISTORISED INDUCTION BRIDGE.** 1µH to 100H, £18.

S.A.E. for full details.

**STANDARD TRANSFORMERS**

Vacuum Impregnated, interleaved, E.S. screen, universal mounting. Size 4 x 3 1/2 x 2 1/2 in. ALL BRAND NEW. 18/6 each. Post 2/6.

Type 1. 250-0-250 v. 80 mA, 6.3 v 3 a, tapped at 4 v. 4 a. 6.3 v 1 a. tapped at 4 v. and 5 v. 2 a.

Type 2. As above but 350-0-350 v. 80 mA.

Type 3. 30 v. 2 a., tapped at 12, 15, 20 and 24 v. to give 3-4-5-6-8-9-10 v., etc.

**LINEAR AMPLIFIERS**

**L034,** 4 watts, size 8 1/2 x 4 1/2 x 2 1/2 in. high. £5/5/-. **L45A** 5 watts, size 7 x 7 x 5 in. high. £5/19/6. Protective cover, 12/6. **L5055** 5 watts stereophonic, size 10 1/2 x 8 x 6 in. high. £12/12/-. cover with carrying handles 25/-. "Diatonic" 10 watts H-F Ultra Linear Push-Pull, size 9 x 7 x 6 1/2 in. high. £12/12/-. Cover with carrying handles, 19/6. **L1110** 10 watts Hi-Fi Ultra Linear, size 9 x 7 x 5 in. high. £13/13/-. Cover with carrying handles, 19/6. "Conchord" 30 watts Hi-Fi Ultra Linear, size 12 1/2 x 9 x 7 1/2 in. high. £16/15/-. Cover with carrying handles, 25/-. **L50** 50 watts Hi-Fi Ultra Linear, size 14 x 10 x 8 in. high. £23/2/-.

**"TRIPLETONE" CONVERTIBLE AMPLIFIER**

Size 10 x 3 x 4 1/2 in. high. 4 watts output matched for 2-4 ohms, OR 2 amplifiers can be coupled together for STEREO, £8/19/6 each.

**HETERODYNE FREQUENCY METERS TYPE LM14**

Frequency range 125-20,000 kc/s in 2 bands. This is the United States Navy Model of the well-known BC221 Frequency Meter, but has many additional features which increase its usefulness. Voltage stabilisation circuits and Crystal control ensure extreme accuracy and in addition it is fitted with an Internal Modulation switch to allow use as a Signal Generator, size only 8 1/2 in. x 8 in. x 8 1/2 in. Brand New. £25.

"TRIPLETONE" F.M. TUNER, size 11 x 6 x 3 in. high. Coverage 86-104 mc/s. £13/19/6 (unpowered), or £15/14/6 (self powered). Details on request.

**HARRIS ELECTRONICS (LONDON) LTD.**

138 GRAY'S INN ROAD, LONDON, W.C.1

Telephone **TErminus 7937**

Please include carriage costs on ALL items.

Open until 1 p.m. Saturdays.

We are 2 mins. from High Holborn (Chancery Lane Station) and 5 mins. by bus from King's Cross.

**RADIO CLEARANCE LTD.**

TRADE ENQUIRIES INVITED

27 TOTTENHAM COURT RD., LONDON, W.1  
The oldest Component Specialists in the Trade

Telephone: **MUSEUM 9188**  
EST. 35 YEARS

**BARGAINS STILL AVAILABLE IN LOUSPEAKERS**

Enormous purchases of Brand New and guaranteed Plesey loudspeakers enable us to offer these units at THE LOWEST PRICES EVER. Don't miss this golden opportunity to obtain a first-grade permanent magnet LOUSPEAKER off the production line at LESS THAN MANUFACTURER'S COST. Read carefully the prepared list below and choose just the right speaker for the job—COMPARE THE PRICES ANYWHERE.

Diameter in inches	Gauss in Lines	Impedance in Ohms	Price	Diameter in inches	Gauss in Lines	Impedance in Ohms	Price	Diameter in inches	Gauss in Lines	Impedance in Ohms	Price
2 1/2	7,000	80	8/-	3 1/2	9,500	50	10/6	5	7,500	3	9/-
2 1/2	7,000	25	8/6	4	10,000	3	11/6	5	8,500	5	9/6
2 1/2	7,000	55	8/6	4	9,500	15	12/-	5	9,500	3	10/6
2 1/2	7,000	80	8/-	4	7,000	25	11/6	5	9,500	5	10/6
3	8,500	3	10/-	4	6,000	35	10/6	5	9,500	15	12/6
3	8,000	5	8/6	4	7,000	35	11/-	5	8,500	25	10/6
3	7,000	5	9/-	5	9,500	35	11/6	5	8,500	35	11/6
3 1/2	7,000	25	9/-	5	6,000	3	8/-	6 1/2	7,000	3	11/6
3 1/2	9,500	3	10/6	5	6,000	5	8/6	6 1/2	7,000	5	11/6
3 1/2	9,500	8	10/6	5	7,000	3	8/6				
3 1/2	7,000	35	8/6	5	7,000	5	8/6				
Elliptical Size in ins.	Gauss in Lines	Impedance in Ohms	Price	Elliptical Size in ins.	Gauss in Lines	Impedance in Ohms	Price	Elliptical Size in ins.	Gauss in Lines	Impedance in Ohms	Price
6 x 3	5,000	3	7/6	6 x 4	9,500	35	12/-	8 x 2 1/2	5,000	3	8/6
6 x 3	7,000	3	8/-	7 x 3 1/2	7,000	3	9/6	8 x 2 1/2	7,000	5	9/-
6 x 3	9,000	3	8/6	7 x 3 1/2	9,500	3	10/6	8 x 2 1/2	8,500	5	9/6
6 x 3	9,500	4	8/6	7 x 4	9,500	3	11/-	8 x 2 1/2	9,500	3	10/-
6 x 3	9,500	35	11/-	7 x 4	9,500	30	12/6	8 x 2 1/2	8,500	3	11/-
6 x 4	8,500	3	9/6	7 x 4	9,500	35	12/6	8 x 5	10,000	3	13/-
6 x 4	9,500	3	10/6								

ALLOW 2/- each speaker for P. & P./handling charges, and please specify the exact requirements—the nearest available will be sent.

**SELECTED BARGAINS**

Beautifully geared AM/FM 2-Gang Condensers 4/6; AM/FM IPT's 465 kc/s. and 47 Mc/s. 4/6 pair; Magnavox Crystal Tape Recorder Mikes 12/6; 3 watt Stereo Amplifiers complete ready to switch on, 79/6; Sentercell rectifiers £3/2D; D3-2-1Y, 2/6 each. DIODES: O-10, O-47, O-49, O-49D, O-49H, GD10, 2/- each. TRANSISTORS: OC45 4/6; FXA 101 3/6; AP115 4/6. SUBMIN GERMANIUM DIODES 1/3. M.I. DIODES 6d. each. Silicon Diodes, 200 PIV-200 mA. 1/- each; 400 PIV 330 mA. 2/6 each. Please send STAMPED AND ADDRESSED envelope with any enquiry. We regret no catalogues—our stocks move too quickly! Kindly make provision for sufficient postage and packing charges to avoid delay. TERMS: Cash with order or C.O.D. on orders over 10/-.

**CABINETS • CASES CHASSIS**

Anything in metal. "ONE OFFS" a pleasure. Send your drawings for quote. Stove enamelled in any professional finish. **MOSS, WATSON** 40 MOUNT PLEASANT STREET, OLDHAM, LANCs. MAIN 9400

1W-137 FOR FURTHER DETAILS.

**Quidix**  
SOUND SYSTEMS  
AUDIO EQUIPMENT MANUFACTURERS  
**STANSTED, ESSEX.**  
Phone: STANSTED 3132

1W-138 FOR FURTHER DETAILS.


**FANS**  
We manufacture a small efficient electric fan primarily intended for Extraction and/or circulation of air in Electronic Equipment. Our Fan is mounted on a bracket which may be removed if not required.  
Abridged Specification  
Fan Blade O/D. 6in. Rating .10 watts, Voltage at 50 c/s. 200/250 v., Rotation. 2,800 R.P.M. Air displacement exceeds 100 cu. ft./min. Price 29/- ea. Carriage paid.  
**KENURE, HOLT & CO. LTD.,**  
BOYN VALLEY ROAD, MAIDENHEAD, BERKS.  
Tel.: 25225. Quote ref.: AWA/W.W.D.

1W-139 FOR FURTHER DETAILS.

# Wilkinsons FOR RELAYS

## P.O. TYPE 3000 AND 600

### BUILT TO YOUR REQUIREMENTS — QUICK DELIVERY COMPETITIVE PRICES—VARIOUS CONTACTS DUST COVERS—QUOTATIONS BY RETURN



#### MINIATURE SEALED RELAYS

OVER 120 TYPES IN STOCK. SEND FOR LIST.

SIEMENS 1 C.O.		
2.2Ω + 2.2Ω	H96A	18/6
50Ω + 50Ω	H96B	19/6
145Ω + 145Ω	H96C	19/6
1.700Ω + 1.700Ω	H96E	22/6
G.E.C.		
2,500Ω 4C0	M1008	19/6
2,500Ω 1C0	M1022	15/-
5,000Ω 2C0	M1052	17/6
6,700Ω 2m2bHD	M1095	17/6
2,500Ω 2C2K	M1417	19/6
5,000Ω 2C0	M1452	17/6
2Ω 2mHD	M1454	15/-
2,500Ω 2mHD	M1458	15/-
2,500Ω 1m1bHD	M1462	15/-
4Ω 2C02K	M1482	19/6
180Ω 1C0	M1486	15/-
180Ω 2m2bHD	M1487	17/6
180Ω 2C2K	M1490	19/6
670Ω 2C2K	M1493	19/6
670Ω 4K	M1567	19/6

S.T.C.			
45Ω	1mHD	4186EB	19/6
170Ω	1mHD	4186EC	19/6
7,000Ω	2C0MD	4190HD	19/6
2,500Ω	2C0	4184GE	19/6
2,500Ω	1m1HD	4190EE	19/6
ERICSSON			
7,000Ω 1C0	N22242A10	25/-	
2,600Ω 1C0	N22372AC1	15/-	
5,000Ω 1C0	N22372AE1	15/-	
7,500Ω 2C0	N22365AZ1	17/6	
1.1Ω 4C0	N22364AA1	19/6	
1.1Ω 2C02K	N22366AA1	19/6	
1,500Ω 2C02K	N22366AE1	19/6	
2.4Ω 2M	N22371AA1	15/-	
180Ω 2M	N22371AC1	15/-	
2,000Ω 2M	N22371AE1	15/-	
2.4Ω 1m1b	N22370AA1	15/-	
52Ω 1m1b	N22570AB1	15/-	
1,500Ω 2m2b	N22369AE1	17/6	
7,500Ω 2m2b	N22369AZ1	17/6	

**CARPENTER Polarized Relays.** 5A7 55+55Ω also 5HM19A 28+28Ω 45/-  
**MINIATURE UNISELECTORS.** Plug-in type. Occupies no more space than a P.O. 3000 Relay. Siemens No. 2200A, 3 level, 12 outlets, 50 volts, 1 bridging and 2 non-bridging wipers. Supplied complete with jack.  
Other types available including REVERSIBLE.



**EACH 90/-**  
**KEY SWITCHES** (3 position).  
P.O. 212. 2 Changeover each side, 6/6.  
P.O. 198. 4 Changeover each side, 13/6.  
Other types available.  
Knobs, 6d. Plates 1/-.

#### RELAYS MAGNETIC SOLENOID OPERATED

24 volts D.C. 4 make and 4 break 10 amp. contacts. 5C/3944. Brand new, with dust cover, 12/6 each, post 2/-. Suitable for Automatic Machines.  
**CABLE COUPLINGS.** Watertight 5 amp 4 pole Brass Plugs and Sockets, 10/- per pair Post 2/-.

**LOUDSPEAKER BARGAINS.** AXIOM 150 dual cone 12in., 15 watts 15 ohms. Fully dustproof, £7/19/6, post 6/6. ELAC 5in. round, 3 ohms, 11/6, post 2/-.  
**PYE LOUDSPEAKERS.** Made for the PCR2 receiver, 10in. Portable, 3 ohms. Built into wooden carrying case and complete with 45ft. waterproof flex and jack plug, 50/-, carr. 7/6.

**GEARED CAPACITOR MOTORS.** 220/240 v., 50 cy., 30 watts, 300 r.p.m., also spindle for 1,425 r.p.m. Very powerful, 75/-, post 5/-.

**MAINS MOTORS.** Capacitor 220 v. A.C. 1/40th h.p., 1,400 r.p.m. 55/-, post 4/6.  
**SYNCHRONOUS MOTOR.** 200/250 volts A.C. 50 cycles with gear train driving 5 dials 1/10th hr. 10,000 hrs., 22/6, post 3/-.

**SYNCHRONOUS MOTOR.** 200/250 volts A.C. 60 r.p.m., Synclark, 25/-, post 2/-.  
**SATCHWELL THERMOSTATS** adjustable between 70°-100° Fahrenheit. 0-440 v. A.C., 20 amp., 11in. stem. Fitted cover 19/6, post 2/6.

**ROOM THERMOSTAT.** Adjustable between 45 and 75 deg. Fahr., 250 v. 10 amp. A.C. Ideal for greenhouses etc., 35/-, post 2/6.

**CONTACT COOLED RECTIFIERS.** Half wave, 250 volts, 85 milliamps, 8/- each. 250 volt, 120MA, STC type No. C3D, 7/6 each. Post 6d.

**SILICON RECTIFIERS.** BEST GRADE 800 PIV, 500 milliamps, 6/6 ea. 600 PIV 700 milliamps., STC RS27AF, 15/- each. 200 PIV up to 70 volts RMS, 6 amps., 10/- each. 100 volts 200 milliamps., 2/6 each; 50 for 100/-.


**POTENTIOMETERS, WIREWOUND AND CARBON** including Sub-miniature, Sealed and Precision types—comprehensive list now ready.

**PRECISION SILVER MICA CAPACITORS,** 0.1 mfd. ½%, 6/- ea.; 1% 5/- ea.  
**BLOWER MOTORS.** 200/250 volt Capacitor Type 2,800 r.p.m. Cylindrical casing 7in. x 7in. x 7in. with open flange each end £12/10/-.

**DOUBLE HEADPHONES.** High resistance 4,000Ω, 14/6. Post 2/6.  
**DOUBLE HEADPHONES,** sound powered. Type DHR, 17/6. Post 2/6.

#### ONE HOLE FIXING SWITCHES 12/- per dozen 75/- per 100

SINGLE-POLE Double Throw, 3 amp. 250 A.C.  
Can be used as ON/OFF or CHANGE-OVER SWITCH.



**INTERCOM TELEPHONE SET.** Ringing and speaking both ways. Supplied with buzzers, pushers, battery etc. 75/- Post 4/-, 4 Core Cable 8d. yard.

**SELENIUM METAL RECTIFIERS. FULL WAVE BRIDGE**

12 Volts 1 Amp.	7/6 each	24 Volts 1 Amp.	12/6 each
12 Volts 2 Amps	12/6 each	24 Volts 3 Amps	27/6 each
12 Volts 4 Amps	17/6 each	24 Volts 5 Amps	35/- each
12 Volts 6 Amps	20/- each	24 Volts 8 Amps	40/- each

#### MODEL 7 AVOMETER POWER FACTOR AND WATTAGE UNIT £7 Post 5/-.

**AVO TEST BRIDGES.** 220/240 volt A.C. Measure capacities from 5 pf. to 50 mfd. and resistances from 5 ohms to 50 megohms. Valve voltmeter range 0.1 to 15 volts and condenser leakage test. Full working instructions supplied with instrument. £9/19/6. Post 5/-.

#### Microammeters, Milliammeters, Voltmeters BEST MAKES ★ DELIVERY OFF THE SHELF ★ SEND FOR LISTS

**2 1/4. Moving Coil Flush Round**  
10-0-10 Milliamp. 35/-; 50 Milliamp. 35/-; 100 Milliamp. 25/-; Proj. Round 50 Microamps. Special scale, 45/-; All D.C. 100 Microamps, A.C. 85/-;  
**3/4in. MC Flush Round** 100-0-100 Microamp. 70/-; 10 amp. 45/-.  
Postage on all meters 2/-.

**2in. Moving Coil Flush Round**  
0/1 Milliamp. 0.5 Milliamp.; 0/10 Milliamp.; 0/20 Milliamp.; 0/30 volts; 0/40 volts; 0/5 amp. all at 27/6 each.

**FREQUENCY METERS.** 45-55 cycles per second. 230 volt, 6in. dia. Flush Round. Brand new in maker's box. £10/10/-, post 5/-.

**UNI-PIVOT GALVANOMETER,** by Cambridge Instruments, 50-0-50 microamps., dia. 4in. Knife pointer, mirror scale, £10, post 3/-.

**PORTABLE AMMETER.** 0-3 amp. A.C. D.C. 3in. scale, 35/-, post 2/6.  
**AMMETER,** reading 50-0-50 amp., 2in. Flush Square, 17/6 each, post 2/-.

**VOLTMETER.** A.C. 0/300 2 1/4in. Flush Round, 25/-, post 2/-.

**MILLIAMMETER.** 0/100 D.C. 9in. PR. A meter you can read easily, 150/-.

**CELL-TESTING VOLTMETERS.** 3-0-3 volts D.C. In leather case with prods. Just the job for the car. 25/- ea., post 2/6.

**JACK PLUGS.** Cylindrical Bakelite screw-on cover, 2 contact, 2/6, post 6d. Large quantities available.

Also P.O.201 on headphone cord 10H/117 3/- ea. Post 1/-.

**MINIATURE JACK PLUG AND SOCKET.** Bulgin P519/130 3/6, post 6d.

**AUTO TRANSFORMERS** by S.T.C. Totally enclosed C core type, 110-250 volts, 8 tapping, 50 cycles, size 6 1/2 x 5 1/2 x 5 1/2, 500 watts. New latest type £4.


**MAINS TRANSFORMER.** Input 200-250 volts. Output 200-0-300 volts, 250 mA., 6.3 volts, 9 amps. 25/- Post 3/9.

**FERROCUBE ASSEMBLIES TYPE 25 LA1** 10/- each, post 8d.  
**CHOKES** 9 Henries 100 mA. Panneko 7/6 each, post 3/-.

**PRESSURE TRANSDUCERS** SE152A 20 P.S.I. with Transformer £15.  
**LINEAR TRANSDUCERS** IT-1-4 £3.

#### G.E.C. SINGLE PHASE AC MOTORS

**BRAND NEW** powerful motors rated at 1/6 h.p., with body size same as 1/2 h.p. and for most uses just as effective. 200/250 v. 1,440 r.p.m. Sleeve bearings. very silent. Fitted with thermal device giving complete protection against overheating. Resilient mounting. 1/2 h.p. available with standard foot mounting. Ball bearings, 107/6. Carriage 6/6.



**LEDEX SOLENOID-DRIVEN WAFER SWITCHES.** Size 5S. Approx. 24 v. with standard size wafers. Available in 4-bank, 14-bank, 24-bank, all 1-pole, 11-way. Also 4-bank, 1-pole, 12-way, from 90/-.

**MINIATURE SILVER ZINC ACCUMULATOR.** 1.5 volt, 1.5 ampere. Size 2in. x 1.13in. x 0.63in. Weight 1 1/2 oz. Ideal for model work. 12/6 ea. 120/- doz. post 9d.

**STROBOSCOPE FORK.** 125 cycles. P.O. No. 5, 30/- ea., post 2/-.

**RATIO ARM UNITS.** Sullivan 600Ω + 600Ω, 50/-, post 3/-.

**MIRROR GALVANOMETERS BB 3000.** N.E.P. Focal length 20 cm., £18.

**MICRO SWITCH.** Burgess MK4BR, robust die cast casing, 3/6 ea., post 9d.

**SUBMINIATURE MICRO SWITCHES HONEYWELL.** 11SM1-TN13 S.P.D.T. Size .781in. x .250in. x .356in. 6/6 each. Full details on request.

**MINIATURE BUZZERS.** 12 v. with adjustable tone. 7/5.

**BUZZERS.** 230V. Ironclad Gents P367AC 50/-, Post 3/6.

**HIGH NOTE BUZZERS.** 24Vt. AC/DC. with tone adjuster 2 1/2in. dia. bakelite case, 10/6. Post 1/6.

**BELL SETS.** No. 25 AC bell, induction coil, condenser. For telephones 17/6. Post 3/-.

**RINGING GENERATORS** for above 10/6. Post 2/6.

**SINGLE FLEX** 14/0048. Screened and PVC sheathed overall 50/- 100 yd. coil.  
**TWIN MICROPHONE FLEX** 7/004 Screened, PVC overall 150/- 250 yd. coil.


**RESISTORS WIREWOUND AND HIGH STABILITY CARBON** inc. Erie 109, 108 and 100, ex stock in quantity. Write or phone your requirements.

**L. WILKINSON (CROYDON) LTD.**  
**LONGLEY HOUSE LONGLEY RD. CROYDON SURREY**  
Phone: TMO-0236 Grams: WILCO CROYDON

### 7 VALVE AM/FM RADIOGRAM CHASSIS

Valve line-up ECC85, ECH81, EF89, EABC80, EL84, EM81, EZ80.

Three Waveband and Switched Gram positions. Med. 200-550 m. Long 1,000-2,000 m. VHF/FM 88-95 Mc/s. Philips permeability tuning insert on FM and combined AM/FM IF transformers. Latest circuitry including AVC and Neg. Feedback. Three watt output. Sensitivity and reproduction of a very high standard. Chassis size 13 1/2 x 6 1/2 in. Height 7 1/2 in. Edge illuminated glass dial 1 1/4 x 3 1/4 in. Vertical pointer. Horizontal station names. Gold on brown background. A.C. 200/250 v. operation. Magic-eye tuning. Circuit diagram now available.



Aligned and tested ready for use **£13.10.0** Carr. & Ins. 7/6  
Complete with 4 Knobs—walnut or ivory to choice. Indoor FM aerial 3/8 extra. 3 ohm P.M. Speaker only required. Recommended Quality Speakers 10in. Rola 27/6. 12in. R.A. 30/-, 12in. R.A. with Tweeter 42/6. E.M.I. 13 1/2 x 8in. 37/6. Carr. 2/6.

### GO-AX 80 ohm CABLE

High grade low loss Cellular Air Speed Polythene—1/4 in. diam. Stranded Cond. Now only 6d. yard

**BARGAIN PRICES—SPECIAL LENGTHS**  
20 yds. 9/-, P. & P. 1/6. Coax. Plugs 1/-, 40 yds. 17/6. P. & P. 2/-. Sockets 1/-, 60 yds. 25/-. P. & P. 3/-. Couplers 1/3.

**NEW VALVES ALL GUARANTEED**  
**BOXED**  
174 3/6 EF86 8/6 PCL83 10/6  
1E5 185 8/6 EL83 12/6 PCL84 10/6  
384, 3V4 7/- EL34 12/6 PCL85 10/6  
ECC81 EL84 7/- PL36 10/6  
ECC82 7/- EY51 9/- PL81 9/6  
ECC83 EY85 9/- PL83 8/-  
ECL30 9/- EZ81 7/- PY33 10/6  
ECL82 10/- E232 9/6 FY92 7/-  
ECL86 10/6 POC884 8/- U25 10/6  
EF80 7/6 PCF80 8/- UL84 9/-

**TRIMMERS. Ceramic (Compression Type)—**  
30 pF., 50 pF., 70 pF., 9d., 100 pF., 150 pF., 1/3; 250 pF., 1/6; 600 pF. 1/9.

**PHILIPS Bee Hive Type (conc. air spaced)—**  
2-8 pF. 1/-; 30 pF. 1/-.

**METAL RECTIFIERS—STC. Types—RM1**  
4/9; RM2 6/6; RM3 7/6; RM4 16/-;  
RM5 21/-; RM4B 17/6; Mullard BY100 10/6.

**JACK PLUGS—2 1/2 in. Igraic type 2/6;**  
Screened ditto, 3/3; 1 1/2 in. Screened 2/3;  
Transistor type Min. & Sub-min. 1/3.

**JACK SOCKETS—Moulded Igraic type,**  
open 3/8; ditto, closed 4/-. Fax. type open  
2/8, ditto, closed 3/-. Transistor type  
closed, Min. & Sub-min. 1/6.

**PHONO PLUGS 9d. Phono Sockets (open),**  
9d. Ditto (closed), 1/-; Twin Phono  
Sockets (open), 1/3.

**GRUNDIG CONTINENTAL. 3 p. or 5 p.**  
plug, 3/8. Sockets, 1/6.

**WAVECHANGE SWITCHES. 1 p. 12-way,**  
2 p. 8-way, 2 p. 6-way, 3 p. 4-way, 4 p. 2-way,  
4 p. 3-way, long minute, 3/8 ea.

**STYLUS REPLACEMENTS. Diamond Styl**  
for L.P. or Stereo, for all pop. types, BS1,  
Collaro, Garrard, etc., 11/3 ea. Gtd.  
12 mths. SAPPHIRE ditto, 5/3 ea. Comp.  
range in stock.

### TRANSISTOR COMPONENTS

Midget I.F.'s—465 Kc/s. 1/2 in. diam. 5/6  
Osc. Coil M/W 1/2 in. dia. 5/3  
Osc. Coil M. & L.W. 5/9  
Midget Driver Trans. 3.5 : 1 6/9  
Midget Output Trans. Push Pull—3 ohms 6/9

**Elec. Condensers—Midget Type**  
1 mfd., 50 mfd. ea. 1/9, 100 mfd. 2/-, 12 v. wkg.  
**Condensers 150 v. working:**  
.01 mfd., .02 mfd., .03 mfd., .04 mfd., .05 mfd., .1 mfd. 1/-, .25 mfd. 1/3; 5 mfd. 1/6, etc.

**Midget Tuning Condensers**  
J.B. "OO" 208 pf. and 176 pf. 8/6; ditto with trimmers 9/6.  
JB 220 pf. and 105 pf. conc. slow motion 10/6. 363 pf. single 7/6.  
Sub. Min. 1/2 in. Dilemion 100 pf., 300 pf., 500 pf. 7/- each.

**FERRITE AERIALS. M. & L.W. car aerial coil 9/3.**

**Midget Vol. Control with edge control knob. 4 K/ohms, with switch, 4/9. Ditto less switch 3/9.**  
**Speakers: P.M.: 2in. Plessey 75 ohms 15/6. 2 1/2 in. Continental 8 ohms 13/6. 7 x 4in. Plessey 35 ohms 23/6. 2 1/2 in. Continental 8 ohms 13/6.**

**SOLDERING IRONS. Mains 200/220v. or 230/250v. Solon 25 watt Int., 22/6. Spare Elements, 4/6. Bits, 1/-, 65 watt, 27/6, etc.**

**ALUMIN. CHASSIS. 18g. Plain Undrilled, folded 4 sides, 2in. deep, 6in. x 4in., 4/6. 6in. x 6in., 5/9, 10in. x 7in., 6/9, 12in. x 6in., 7/8, 12in. x 8in., 8/-, etc.**  
**ALUMIN. SHEET. 18g. 6in. x 6in., 1/-, 6in. x 9in., 1/6, 6in. x 12in., 2/-, 12in. x 12in. 4/6, etc.**

### 6 VALVE AM-FM TUNER UNIT

Med. and VHF 190 m.-550 m., 85 Mc/s-103 Mc/s. 6 valves and metal rectifier. Self-contained power unit, A.C. 200/250 v. operation. Magic-eye indicator, 3 push-button controls. on/off, Med., VHF. Diode and high output sockets with gain control. Illuminated 2-col. perspex dial 1 1/2 x 4 in. Chassis size 1 1/2 x 4 x 5 1/2 in. A recommended Fidelity Unit for use with Mullard "3-3" or "5-10" Amplifiers. Available only at present as built-up units, aligned and tested ready for use. Bargain Price £12/10/-. Carr. 5/-. We hope to produce this popular unit in kit form very shortly.

### MULLARD "3-3" HI-FI AMPLIFIER. 3 VALVES 3 WATT



3 ohm and 15 ohm Output. Hi-Fi quality at reasonable cost. Bass Boost and Treble controls, quality sectional output transformer, 40 ohms-25 kc/s. ± 1 dB. 100 mV. for 3W, less than 1% distortion. Bronze escutcheon panel. Power take-off available. Complete Kit only £8/19/6. Carr. 5/-. Wired and tested 8 gns.

**MULLARD "5-10" AMPLIFIER.**  
5 valves 10W. 3 and 15 ohms output. Mullard's famous circuit with heavy duty ultra-linear quality output transformer. Basic amplifier kit price £9/19/6. Carr. & Ins. 7/6. Ready Built 11 1/2 Gns.

**CONTROL PANEL KIT**  
Bass, Treble and Volume control with 4-position selector switch for radio, tape and p.u. and 1 1/2 in. x 4 in. escutcheon panel.  
**Amplifier Kit and Control Panel Kit £11/19/6.** Ditto ready wired £14/19/6.  
**2-VALVE PRE-AMP UNIT**  
Based on Mullard's famous 2-valve (2 x EF86) circuit with full equalisation, with volume bass, treble, and 5-position selector switch. Size 9in. x 6in. x 2 1/2 in. Complete Kit £5/19/6. Carr. 3/6. Ready built £7/19/6.

### ANOTHER TAPE RECORDER BARGAIN

Manufacturers end of production Surplus Offer



A 24 gn. Tape Recorder offered at the bargain price of only 15 gns. plus 10/- carr. Supplied in 3 Units already wired and tested. A modern Circuit for quality recording from Micro, Gram or Radio, using latest B.S.R. Twin Track Monardeck Type TD2.  
Valve line-up—EF86, ECL82, EM94, EZ80 and Selenium Diode. Send for detailed list—3d. stamp.

**Complete Kit** comprising items below.  
**BARGAIN PRICE 15 Gns.** +10/- Carr.

2-tone Cabinet and 8in. x 5in. Speaker. Size 14in. x 10in. x 7 1/2 in. £3 10 0 + 5/- Carr.  
Wired Amplifier complete with 4 Valves, front Panel, Knobs, etc. £5 12 6 + 3/8 Carr.  
B.S.R. Monardeck Type TD2 £7 7 0 + 4/8 Carr.  
Accessories: Mike, Tape, empty Reel, screened Lead and Plugs, Instructions, etc. £1 0 0 + 2/- Carr.

We manufacture all types Radio Mains, Transf. chokes, Quality O/P Trans., etc. Enquiries invited for specials, prototypes for small production runs. Quotation by return.

### RECORDING TAPE

Famous American Columbia (CBS) Premier quality tape at NEW REDUCED PRICES. A genuine recommended Quality Tape—TRY IT BRAND new, boxed and fully guaranteed. Fitted with leader and stop foils.  
**Standard Double Play**  
5in. 900ft. 13/- 1,200ft. 31/6  
6 1/2 in. 900ft. 16/- 1,800ft. 37/6  
7in. 1,800ft. 21/- 2,400ft. 47/6  
7 1/2 in. Long Play Post & Pack per min.  
5in. 900ft. 17/8 reel, 1/- plus 6d.  
5 1/2 in. 1,200ft. 19/6 ea. for additional 7in. 1,800ft. 28/6 reels.

**SPECIAL OFFER. 3in. Message tape**  
150ft. 3/9; 3in. L.P. 225ft. 4/9; 3in. D.P. 300ft. 6/6; P. & P. per reel 6d.  
**TAPE REELS. Minis. 7 surplus 7in.**  
2/3; 5 1/2 in. 2/-; 5in. 2/-; 6in. 1/3; Plastic spool containers, 5in. 1/9; 5 1/2 in. 2/-; 7in. 2/3.

**SPEAKERS P.M. 3 ohms. 2 1/2 in. EMI. 15/6. 3in. Goodman 16/6. 5in. BOLA 15/6. 6in. Elac 16/6. 7 1/2 in. Goodmans 15/6. 8in. BOLA 19/6. 10in. Elac 25/-, 10 x 6in. Goodmans 22/6. 2 1/2 in. E.M.I. Tweeter. 22/6. 13 1/2 in. x 8in. E.M.I. (Ceramic Magnet) 37/6.**

**ENAMELLED COPPER WIRE—1 1/2 lb. reels**  
14g-20g 2/6; 22g-28g, 3/-; 30g-34g, 3/9; 30g-38g, 4/3; 39g-40g, 4/6, etc.

**TINNED COPPER WIRE 16-22s., 2/6 1/2 lb. VALVE HOLDERS—Int. Oct. Gd. Nylon or Ceramic, B7G. B9A unskirted, 9d. B7G B9A skirted 1/- each; B7G with Can 1/6; B9A with Can, 1/3, etc.**

**KNOBs—Modern Continental types—**  
9d. or Ivory with Gold Ring. 1in. dia. 9d. each, 1 1/2 in. 1/- each, Brown or Ivory with Gold Centre 1in. dia., 10d. each; 1 1/2 in. 1/3 each.

LARGE SELECTION AVAILABLE.

**TYGAM-FRET (Contem. pat.) 12 x 12 in.**  
2 1/2 x 12 x 18 in. 3/-; 12 x 24 in. 4/-, etc.  
**BONDACOUST Speaker Cabinet Acoustic**  
Wadding, approx. 1in. thick, 12in. wide, any length cut 1/6 ft. 4/- yd. EXPANDED ANODIZED METAL. Attractive gilt finish 1/2 x 1/2 in. diamond mesh 4/6 sq. ft. Multiples of 6in. cut Max. size 4ft. x 3 4/6 ft. max. carr.

**JASON F.M. TUNER UNITS**  
Designer-approved kits available.  
FM21. 5 gns., 4 valves 20/-  
FM22. £7, 5 valves 35/-  
JTV Mercury, 10 gns. 3 valves 22/6  
JTV2. £13/19/6. 4 valves 28/6  
NEW JASON F.M. HANDBOOK 2/6  
48 hr. Alignment Services, 7/6 plus 2/6.

**CONDENSERS—Silver Mica. All values**  
2 pf. to 1,000 pf., Gd. each. Ditto ceramics  
9d. Tub. 450 v. T.C.C., etc. .001 mfd., .01 and 1/350 v. 9d. .02-1500 v., 1/-, .25 Humis 1/4 in. T.C.C. 1/9, etc. etc.  
**CLOSE TOL. S.MICA. 10% or 5 pf.-500 pf.**  
8d. 600-5,000 pf. 1/-, 1% 2 pf.-100 pf. 9d. 100pf.-500 pf. 11d. 575 pf.-5,000 pf. 1/6.

**RESISTORS—Modern ratings full range**  
10 ohms to 10 megohms. 20% 1/4 w. 3d. ea., ditto 1 w. 6d. ea., 2 w. 9d. ea., 10% 1/4 w. 4d. ea., 5% HI-stab, 1/4 w. 6d. ea. (below 100 ohms and over 1 meg. 9d. ea.) 1% HI-stab, 1/2 w. 1/6 ea., (below 100 ohms and over 1 meg. 1/6 ea.)  
**WIREWOUND. 25 ohms to 10K.**  
5 w. 1/3. 10 w. 1/6. 16 w. 2/-.

**PRE-SET TV FOTS. W/W 25 ohms-50 K. 3/-, 50 K. 2 Meg. (Carbon), 3/6.**

**Electrolytics All Types New Stock TUBULAR CAN TYPES**  
25/25v. 50/12v. 1/9. 8+8/450 v. 4/6  
50/50v. 100/25v. 2/- 32+32/275v. 4/6  
8/450v. 4/350v. 2/3 50+50/350v. 6/6  
16/60/450 v. 5/6 60+250/275v. 17/6  
32/32/450 v. 5/6 100+100/275v. 12/6  
Transistor Midge types—all values 1 mfd. to 50 mfd. 1/9 ea., 100 mfd. 2/-, 12 v.

**VOLUME CONTROLS—5K—2 Meg.**  
ohms 3in. SPINDLES. MORGANTINE MIDGET TYPE. 1 1/2 in. dia. Guar. 1 year. LOG or LIN. Ratios, less Sw. 3/- D.P. Sw. 4/6. Twin stereo less Sw. 6/6. Some values with DP Sw. 8/6.

### DE-LUXE RECORD PLAYER KIT

Incorporating 4 Sp. Garrard Auto-Slim unit and Mullard latest 3 watt printed circuit amplifier (ECL86 and EZ80), vol., bass and treble controls, with 8 x 5in. 10,000 Hz speaker. Contemporary styled two-tone cabinet, charcoal grey and off-white with matching blue relief. Size 17 1/2 in. x 16in. x 8in. A stylish unit capable of quality reproduction. Circuit and const. details 2/6 (free with kit).


**COMPLETE KIT**  
Carr. and ins. 10/- **£13.19.6**

Illuminated Perspex control panel escutcheon 7/6 extra. Ready wired 30/- extra. 4 contemporary mounting legs (6 or 13in.), 12/6 per set.



Only a few items are listed from our comprehensive stock. Write now for full bargain lists, 3d.

Terms: C.W.O. or C.O.D. post and packing 1/2 lb. 9d., 1 1/2 lb. 1/3, 3 lb. 2/3, 5 lb. 2/9, 10 lb. 3/9, etc.  
**RS RADIO COMPONENT SPECIALISTS** Established 1946  
70 BRIGSTOCK RD., THORNTON HEATH, SURREY  
Tel.: THO 2188: Hours 9 a.m.—6 p.m. 1 p.m. Wednesday.



**MARCONI TF987/1 NOISE GENERATORS.** DETERMINE NOISE FACTOR of A.M. & F.M. receivers. A.C. mains operation. Stabilised. H.T. AS NEW. Tested, £15, carr. 7/6. SLIGHTLY USED (but tested), £8/19/6, carr. 7/6.

**E.M.I. MEASURING OSCILLOSCOPE TYPE WM 2**

An accurate modern 5in. mains operated 'scope for the examination of waveforms up to 12 Mc/s. Includes such features as "X" expansion, continuous 6:1 flat aluminium screen, etc. Scarcely used condition complete with instruction manual. Fully guaranteed. £50.

**AR-88 SPARES**

R.C.A. Headphones ..... £2/6  
Escutcheons (Windows) ..... 8/6  
Knobs. Medium size. Set of 8. 10/-  
Block Condenser (3 x 4 mfd.). 7/6.

**CONSTANT VOLTAGE TRANSFORMERS.** Input 190 to 260 volts 50 c.p.s. Output 115 volts at 2 kVA. A pair of these will give a constant output of 230 volts at 4 kVA. Price £15 each, plus £1 carriage. Two for £30. Carriage paid.

**GENERAL RADIO LR2 HETERODYNE FREQUENCY & CALIBRATOR EQUIPMENT. BRAND NEW. £75.**

Instruction manuals for LM-14 Wave-meter. Original. New 32/6.

Quotations for other Instruction Manuals on receipt of S.A.E.

**MICROAMMETERS**

R.C.A. 0-500 microamps. 2½in. circular flush panel mounting. Dials are engraved 0-15, 0-600 volts. As used in the American version of the No. 19 set. 15/-.

**INDUSTRIAL METER.** Iron clad. 0 to 300 v. A.C. 50 cycles. Moving iron, 6in. scale Fl. mtg. BRAND NEW. 59/6. P. 4/-  
**KILOWATT METER 0-16KVA.** 3 phase 6in. scale. Boxed. New. £5. P. & P. 6/6.

**A.C. VOLTMETER.** 0-300 volts Moving iron. Flush panel mounting. Barrel diameter. 2½in. 22/6.

**MARCONI SIGNAL GENERATOR TF-517.** Three ranges. 18 to 58 Mc/s in 2 individually calibrated ranges and 160 to 300 Mc/s. by DIRECTLY calibrated dial. A.C. mains operation. AS NEW CONDITION in original transit cases with instruction book. £7/10/- Carr. £1.

**STANDARD TRANSFORMERS**

Vacuum impregnated, interleaved, E.S. screen, universal mounting. Size 4 x 3½ x 2½in. ALL BRAND NEW. 18/6 each. Post 2/6.  
Type 1. 250-0-250 v. 80 mA., 6.3 v. 3 a. tapped at 4 v. 4 a. 6.3 v. 1 a. tapped at 4 v. and 5 v. 2 a.  
Type 2. As above but 350-0-350 v. 80 mA.  
Type 3. 30 v. 2 a., tapped at 12, 15, 20 and 24 v. to give 3-4-5-6-8-9-10 v., etc.  
Type 5. 0-6-9-15 v. 4 a. Ideal for chargers.

**MOVING COIL PHONES.** Finest quality Canadian with chamois ear-muffs and leather-covered headband. With lead and jack plug. Noise excluding and supremely comfortable. 22/6. Post 1/6. As above but complete with moving coil microphone. 25/-. Post 2/6. DLR-5 Low impedance headphones with attached throat microphone. 12/6. Post 1/6. All these items BRAND NEW.

**SPECTRUM ANALYSER  
TYPE TSX-4SE. (3 centimetre)**

Made by M.I.T. Radiation Laboratories. Combined receiver and indicator for the visual display of the spectra of pulsed oscillators in the frequency range 8,630 to 9,550 Mc/s. Self-contained reaction type cavity wavemeter. Receiver bandwidth 50 Kc/s. Can be used for tuning receiver local oscillators, adjusting defective R.F. components, measuring large standing wave ratios and the "Q" of resonant cavities. Supplied in first class guaranteed condition. £75.

**TS-148/UP. AMERICAN SPECTRUM ANALYSER.** Checks frequency of TR and TB cells, signal generators, local oscillators and magnetrons. Measures pulse width, RF spectrum width and "Q" of resonant cavities. Frequency range 8,500 to 9,600 Mc/s. Internal power supply for 115 volts 50 c/s. In first-class condition. £90.

**AR-88 SPARE VALVES.** Complete set of BRAND NEW individually boxed original valves (14). £2/10/- P. & P. 2/6.  
**AR-88 VIBRATOR PACKS.** For 6 v. operation. Complete with vibrator and OZ4 rectifier. BRAND NEW in original cartons. 15/- P. & P. 5/-.

**ABSORPTION WAVEMETERS**

**MARCONI TF-643B.** Covers from 20 to 300 Mc/s. in four plug-in coil ranges. Complete with individual calibration charts. Accuracy 1%. Indication is on a 50µA 2½in. panel meter. In original transit cases. Condition as new £5/19/6. Carr. 7/6.

**AVO WIDE RANGE SIGNAL GENERATORS**

Six turret operated ranges covering 50 kc/s to 80 Mc/s For use on standard A.C. mains. Packed in original transit cases with accessories. Post-war type in new condition. £16. Carriage 10/-.

**L, C & R BRIDGES**

AVO, capacity 5 pfd. to mfd. Resistance 5 ohms to 50 Meg-ohms. Inductance can be measured against external standard. Balance is indicated on a meter which can be used as a valve voltmeter from 0.1 to 15 v. Leakage test and Power Factor scale. A.C. mains operation. Tested and guaranteed and in superlative condition. £9/10/- plus 5/- P. & P.

**MAGNETIC COUNTERS (Ex-G.P.O.).** 4 figures to 9,999 Coils 5000Ω for 24 v. operation. Tested. (No reset). 5/- each. P. & P. 1/6. SPECIAL OFFER. 10 for 30/- P. & P. 5/-.

**RELAYS G.E.C. MINIATURE SEALED**

M-1095. 670Ω 2M 2B H/D Wire Ends ..... 7/6  
M-1099. 670Ω 2M H/D Wire Ends ..... 7/6  
M-1052. 5,000Ω 2/CO. Plat. Wire Ends ..... 10/-  
M-1092 670Ω 4/CO. Plat. Wire Ends ..... 12/6  
ALL BRAND NEW AND BOXED. Please add postage.

**OSCILLOSCOPE OS-57/USM 38**

A modern American instrument with printed circuit, miniature valves (30) and 3in. CRT (3WP1). Rugged construction, handsome appearance, 9in. x 13in. x 14½in. Controls are protected by a detachable lid which neatly houses test leads, cathode follower probe, circuit diagram and instructions. Time base 1, 10, 100, 1K and 10Kµs/inch. Markers 1, 10 and 100µs. Features include "X" expansion. Astigmatism, trigger rate 40 to 5,000 c.p.s., Sweep Stability, variable calibration voltage, "Z" modulation, etc. Marker and Trigger pulses can be used externally. Operates from 115 volts 50 to 400 c.p.s. Tested and in BRAND NEW condition. £29/10/- Carr. 10/-.



**STANDARD SIGNAL GENERATOR £16/10/- Carr. 30/-**

**MARCONI TF-144G/4**  
Complete and in apparently very good condition but sold as received from the Air Ministry, i.e., untested and less leads. Technical manual and circuit supplied. We assure potential customers that "untested" does NOT mean "beyond economical repair" but are willing to supply GUARANTEED WORKING instruments complete for £25.

**HEATHKIT & JASON AGENTS**

**CHARLES BRITAIN (Radio) LTD.**  
11 UPPER SAINT MARTIN'S LANE  
LONDON, W.C.2. TEMPLE Bar 0545  
Near Leicester Sq. Station. (Opposite Thorn House)  
Shop hours: 9-6 p.m. (9-1 p.m. Thursdays). Open all day Saturday

**PORTABLE RECEIVER TESTER**

**MARCONI INSTRUMENTS TF-888/3**  
This instrument combines the functions of a wide range signal generator and output meter. Continuous frequency coverage of 70 kc/s. to 70 mc/s. in 8 wavebands by means of a rotating coil turret. Output impedances 80 or 52 ohms or high level (500 mV.) 40Ω. Int. Mod. at 1000 c/s. Two crystal checks at 500 kc/s. and 5 mc/s. Panel meter monitors carrier and also functions as output meter, full scale 10 mV., 100 mV. and 1 w. Input impedances 3, 33, 150 and 600Ω. Handsome grey case size 15½ x 7½ x 11½ high. Wt. 17½ lbs. Operates from A.C. mains 100 to 250 volts. As new, tested and guaranteed, £39/10/- Carr. 10/-.

**R-1949 V.H.F. RECEIVER**

Aircraft version of Hallicrafter S-27. Covers 27 to 143 mc/s. in 3 ranges. Full spec. "S" meter, B.F.O., noise lim. etc. F.M. or A.M. Requires external power supply of 250 v. and 6.3 v. Fully tested and guaranteed. £17/10/- Carr. 10/-.

**PHASE MONITOR ME-63/U (AN/JRM-67)**

Designed to measure directly the phase angle between two applied audio frequency signals of from 20 to 20,000 c.p.s. ± 1° Direct indication on a panel meter. Input can be sinusoidal or non-sinusoidal from 2 to 30 volts peak. Of recent manufacture (1957) by Control Electronics Inc. and ex-U.S.A. Air Force. In first class condition with handbook. A complex instrument with 19 valves. £40. Carriage 30/-.

**AERIALS VERTICAL 32FT.**

Consists of 10 heavy duty screw together rods (3ft. long, ¼in. dia.) together with a separate 14ft. whip aerial (wired through). Complete with base mounting, all guy ropes, insulators, spikes and even a hammer. All contained in a sturdy canvas carrying bag similar to a gold bag. Full contents list available. BRAND NEW. 59/6. Carr. 10/6.

**HEWLETT PACKARD 205 AG.**

An American audio signal generator of the finest quality. Ranges 20 to 200, 200 to 2,000 and 2,000 to 20,000 c.p.s. Output is 5 watts. Fully variable attenuator 0 to 110 dB in 1 dB steps. Output impedances 50, 200, 500 and 5,000 ohms CT ungrounded. Input and output monitor meters. Operation from 110 volts A.C. mains. Electrically perfect but wooden cases may be slightly damaged. £30. Carr. 30/-.

**RADIATION METERS**

Portable dose rate meter containing modern type rectangular 50 micro-amp meter CVX 494, electrometer valves, etc. BRAND NEW. In canvas carrying case £3/19/6. Post 4/-.

**SIGNAL GENERATOR CT-53**

A precision instrument covering 8.9 to 15.5 Mc/s. and 20 to 300 Mc/s. in six ranges. Variable attenuator from 1µV to 100 millivolts. A.C. mains operation. Good condition, tested and complete with calibration chart. £16/10/- Carr. 10/-.

**HEAVY DUTY TRANSFORMER.**

Input 220 volts to 250 volts at 50 cycles tapped every 5 volts. Secondary, 50 volts at 15 amps. Very conservatively rated. Size 7½ x 5½ x 7in. Wt. 28lb. Brand new. £5/19/6. Carr. 7/6.

**TS-175 HETERODYNE FREQUENCY METER**

A high frequency version of the well-known BC-221. Accuracy 0.05%. Frequency range 80 to 1,000 Mc/s. As new condition with original calibration book. Tested and guaranteed. £75.

**BC221 FREQUENCY METER**  
125 kc/s. to 20 Mc/s.

This crystal controlled heterodyne frequency meter is too well-known to need further description. Those we offer are complete with correct individual calibration book and are carefully tested and guaranteed. Used condition. £16 Carr. 10/-.  
**Laboratory Standard £25**

# Samson's

(ELECTRONICS LTD)

LONDON'S LARGEST SUPPLIERS OF  
ELECTRONIC EQUIPMENT  
**9 & 10 CHAPEL STREET,  
LONDON, N.W.1**  
Tel. PAD 7851      AMB 5125



### HEAVY DUTY L.T. TRANSFORMERS

All primaries 220-240 volts. Terminal block connections.

No.	Sec.	Taps	Price	Carr.
1	25, 30, 35 v.	40 a.	£11 19	6 10/-
2	25, 30, 35 v.	20 a.	£6 19	6 7/6
3	25, 30, 35 v.	10 a.	£4 15	0 5/-
4	25, 30, 35 v.	2 a.	£1 17	6 3/6
5	10, 17, 18 v.	10 a.	£2 17	6 4/-
6	24 volts, 30 amps.		£7 15	0 7/6
7	20 volts, 30 amps.		£6 15	0 7/6
8	50 volts, 15 amps.		£6 19	6 7/6
9	30, 40, 50 v.	5 a.	£4 15	0 5/-
10	25, 36, 48 v.	8 a.	£4 19	6 5/-
11	17, 18, 20 v.	20 a.	£4 19	6 5/-
12	6, 12 v.	20 a.	£3 12	6 5/6
13	20 v.	20 a.	£4 15	0 7/6
14	30, 32, 34, 36 v.	5 a.	£2 17	6 4/-
15	6, 12 v.	10 a.	£2 2	6 4/-
16	12 v.	5 a.	£1 9	6 3/-
17	24 v.	10 a.	£3 5	0 4/-
18	24 v.	5 a.	£1 19	6 3/6
19	48, 56, 60 v.	1 a.	£1 9	6 3/6
20	12, 24, 30, 48 v.	2 a.	£2 5	0 3/6
21	6.3 v.	15 a.	£1 17	6 3/6
22	12, 24 v.	1 a.	£15	0 2/6
23	9, 15 v.	2 a.	£17	6 2/6
24	6, 9, 15 v.	4 a.	£1	5 0 3/6
25	12, 18 v.	10 a.	£2 12	7 4/-
26	12, 18 v.	20 a.	£3 19	6 5/-
27	10, 18, 20 v.	9 a.	£3 9	6 5/-
28	15 v.	ct., 5 a.	£1	5 0 3/6
30	10, 11, 12 v.	1 1/2 a.	£10	6 2/-

### Multi-Tapped Transformers

Pri. 200, 230, 250 volts. Sec. T. 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24, 30 volts. 5 amps. 45/-, P.P. 4/-, 4 amps. 39/6. P.P. 3/-, 2 amp., 25/-, P.P. 3/-.

### AUTO. TRANSFORMERS

240v.-110v. Completely Shrouded fitted with 2 Two-Pin American Sockets or Terminal Blocks. Please state which type required. 1,000 watts, £4/15/-, carr. 5/-, 500 watts, £3/10/-, carr. 4/-, 300 watts, 47/6, P.P. 3/6. 150 watts, 37/6, P.P. 3/-, 60 watts, 29/6, P.P. 2/6. 2,000 Watts. Completely enclosed in metal case. Size: 10 x 8 x 6ins. Fitted with 2 American Sockets or Terminal Blocks, £9 15 0, carr. 7/6.

### PARMEKO DOUBLE WOUND TRANSFORMERS

Pri. T. 200, 210, 220, 230, 240, 250 v. Sec. T. 90, 100, 110, 120 v. Totally enclosed tabletop connections. Size 7 1/4 x 7 1/4 x 8 1/2 in. Brand new, fraction of maker's price. £11/19/6, carr. 10/-.

### IBM DOUBLE WOUND TRANS.

Pri. Tapped 200, 220, 240 v. Sec. Tapped, 110-100 v., 200V.A. 47/6, Carr. 5/-.

### L.T. TRANSFORMER UNIT

Type AP61774. A.C. input 220-240 v. comprises of Parmeko "C" core, enclosed type transformer 24 volts 2 amps. Built into metal case, size 8 1/2 x 5 x 4 1/2 in., with fitted neon indicators. Fuses. Input and output terminals. Supplied brand new at a fraction of maker's price. 19/6. Carr. 5/-.

### HEAVY CURRENT TRANSFORMERS LIMITED NUMBER ONLY

Pri. 230 v. Sec. T 4-6-11 v. 200 a. £10/19/6. Carr. 10/-, Pri. T 200-260 v. and 100-130 v. Sec. T 2 28, 29, 30, 31 v. 25 a. conservatively rated £6/15/-, Carr. 10/-, Pri. T 210-250 v. and 105-115 v. Sec. T 27 v. 60 a. Totally enclosed new in maker's cases. £12/10/-, Carr. 10/-, Pri. T 210-240 v. Sec. 17, 18, 30, 32 v. 8 a. £4/2/6. Carr. 7/6. Pri. 200, 225, 240 v. Sec. T 12, 18, 20, 24, 30, 36 v. 10 a. £5/5/-, Carr. 7/6. Pri. T 200-220, 240 v. Sec. T 50, 70, 73 v. 15 a. £6/19/6. Carr. 10/-, Pri. 200, 220, 240 v. Sec. T 100, 155 v. 22 a. £9/19/6. Carr. 10/-, Pri. 240 v. Sec. T 53.5, 55.2 v. 6 a. C core £3/17/6. Carr. 6/-.

### BLOCK CAPACITORS—Guaranteed

#### AMERICAN HIGH VOLTAGE CAPACITORS

1 mfd. 20 kV. wkg. Tropically rated. Size H. 1 1/2 in. plus insulated terminals, 5in., W. 1 3/4 in. D. 4in. Supplied new in maker's packing cases at a fraction of original price, £6/19/6. Carr. 7/6.

Maker	Mfd.	DCV wkg.	Temp.	Price	Carr.
T.C.C.	10	1,500	70°C	15/-	3/-
U.S.A.	10	1,500	100°C	15/-	3/-
T.C.C.	8	1,500	60°C	17/6	2/6
T.C.C.	8	1,000	60°C	10/6	2/-
G.E.C.	8	600	60°C	7/6	2/-
T.C.C.	8	250	70°C	3/6	1/6
Dubilier	8	1,000	60°C	9/6	2/6
Dubilier	8	750	60°C	8/6	2/6
U.S.A.	7	600	100°C	6/6	1/6
U.S.A.	5	220	100°C	3/6	1/6
T.C.C.	4	2,000	60°C	17/6	2/6
T.C.C.	4	1,000	60°C	7/6	1/6
T.C.C.	4	400	70°C	3/6	1/6
BI	4	800	70°C	5/6	1/6
Dubilier	2	5,000	70°C	35/-	3/6
Dubilier	2	2,500	70°C	17/6	2/6
T.C.C.	2	1,000	60°C	5/6	1/6
T.C.C.	2	500	60°C	3/6	1/6
T.C.C.	1.5	4,000	60°C	12/6	2/6
T.C.C.	1	7,500	70°C	50/-	5/-
T.C.C.	1	2,500	60°C	17/6	3/6
T.C.C.	1	600	70°C	2/6	1/6
Dubilier	1	5,000	70°C	30/-	3/6
T.C.C.	0.5	500	60°C	2/-	1/6
Dubilier	0.5	5,000	70°C	17/6	2/6
Dubilier	0.5	2,000	70°C	8/6	2/6
Dubilier	0.25	5,000	70°C	12/6	3/6
Dubilier	0.25	7,500	70°C	17/6	3/6
T.C.C.	0.25	5,000	60°C	12/6	3/6
B.I.C.	0.1	5,000	60°C	10/6	3/6

### V.A.C. R.M.S.

T.C.C.	68	440	—	45/-	4/-
T.C.C.	25	440	—	25/-	3/6
Dominit	22	650	—	27/6	3/6
Dominit	16	650	—	17/6	2/6
Dominit	4	650	—	10/6	2/6
BI	13.5	750	—	22/6	3/6
BI	10	650	—	17/6	2/6

Send 6d. stamp for latest catalogue. Monthly account orders accepted from industrial companies, hospitals, colleges and schools, etc.

### SPECIAL OFFER OF PARMEKO NEPTUNES SERIES "C" CORE H.T. TRANSFORMERS AND CHOKES.

Brand new, offered at a fraction of maker's price.

All primaries 10-0-200, 220, 240 v. 50 c/s. 500-0-500 m. 0-4-5 v. 3.5 a. 0-4-6.3 v. 4 a., 0-4-6.3 v. 4 a., 0-4-5-6.3 v. 3.5 a. 57/6. Carr. 6/-, 500-0-500 v. 120 mA., 0-4-5 v. 3 a., 0-4-6.3 v. 3 a., 0-4-6.3 v. 5 a. 42/6. Carr. 5/-, 450-400-0-400-450 v. 250 mA., 0-4-5 v. 3 a., 0-4-6.3 v. 4 a., 0-4-6.3 v. 3 a., 0-4-6.3 v. 3 a. 55/-, Carr. 6/6, 250-0-250 v. 100 mA., 0-4-5 v. 3 a., 0-4-6.3 v. 3 a., 0-4-6.3 v. 3 a. 30/-, Carr. 4/-, 0-4-5-6.3 v. 2 a. 10/-, P.P. 2/-, 0-4-6.3 v. 2 a., 0-4-6.3 v. 2 a., 6kV. wkg. 17/6, P.P. 2/6, Chokes, oilfilled, "C" core. 15 H. 250 mA., 125Ω 17/6, P.P. 5/-, 5 H. 250 mA., 110Ω 15/-, P.P. 5/-, 20H. 180 mA. 230Ω 17/6, P.P. 5/-, 15H. 180 mA. 200Ω 15/-, P.P. 4/-, 20H. 120 mA. 240Ω 15/-, P.P. 4/-, 10H. 120 mA. 250Ω 10/-, P.P. 3/-, 50H. 50 mA. 1300Ω. 12/6, P.P. 3/6, 50H. 25 mA., 1200Ω 10/-, P.P. 3/-, 10H. 75 mA. 280 mA. 7/6, P.P. 2/6, 5H. 60 mA. 300Ω 5/-, P.P. 2/-, Open type 20H. 250 mA. 50Ω 17/6, Carr. 5/-, 20H. 300 mA. 200Ω 22/6, P.P. 5/-.

GARDNERS 560-0-560 v. 400 mA. D.C. 5v. 6 A. 6 v. 0.4 a. 52/6. Carr. 5/-, 350-0-350 v. 75 mA. 6.3 v. C.T. 3 a. 6.3 v., 3 a. 6.3 v. 1 a. 32/6. Carr. 4/-, Sec. T. 1430-0-1430 v. 140 mA. 4 v. C.T. 7 a., 8 v. 4 a., £4/17/6. 450-0-450 v. 135 mA. R.M.S. 5 v. 3 a., 12.6 v. 4.5 a., 6.3 v. 2 a., 6.3 v. 1.4 a., 6.3 v. 1.4 a., 12.6 v. 1.2 a. 45/-, 500-400-0-400-500 v. 250 mA. +5 v. 3.5 a., 4-6.3 v. 3 a., 4-6.3 v. 3 a. Unshrouded, 35/-, Carr. on all trans. 5/-.

GRESHAM FILAMENT TRANS. 4-6.3 v. 2 a. 4-6.3 v. 2 a., 15/-, 6.3 v. 3 a. 6.3 v. 3 a., 6.3 v. C.T. 5 a., 22/6, 6.3 v. 5 a., 6.3 v. 0.8 a. and 130 v. 85 mA. 17/6. P.P. 3/-.

### 1% RESISTANCE BOXES FOUR DECADES

1. 10-100Ω. 2. 100-1,000Ω. 3. 1K-10KΩ. 4. 10K-100kΩ.  
Technical description: High Stability Resistors arranged as a potentiometer, rated at 1 watt at 70 deg. C. and 1 1/2 watts at 42 deg. C. Tolerance plus or minus 1%. Specially designed for use in technical colleges and schools where a high-precision instrument is required at low cost. Supplied brand new and guaranteed. £9/19/6. P.P. 3/6.

### L.T. SUPPLY UNIT TYPE S.E.1



A.C. input 200-240 v. D.C. Output tapped to give 12 or 24 volts 8 amps. continuous rating. Fitted with panel fuse. Mains on/off switch and D.C. output socket. Built in strong metal case. Size 15 x 6 x 6 in. An ideal general purpose L.T. supply unit for operating relays. Contactors, battery charging, etc. £9/19/6, carr. 7/6.

### L.T. SUPPLY UNIT TYPE S.E.2

A.C. input 200-240 v. D.C. output 50 volts 5 amps. Built in metal case size 15 x 6 x 6 in. Fitted with on/off switch, panel fuse, and output socket, £9/19/6, carr. 7/6. Tapped 110-220-230 v. D.C. output 24 volts 1.5 amps. 2.25 amps. with case cover removed. Choke and condenser smoothed. Fitted on/off switch and fuses. Built in metal case. Size: 15 x 9 x 9 inches. Supplied new and guaranteed, £3/17/6, carr. 7/6.

### SPECIAL OFFER OF BRAND NEW ERNEST TURNER 2 1/2 in. ROUND FLUSH PANEL D.C. INSTRUMENTS.

50-0-50 microamps 50/-, 0-50 microamps 45/-, 0-200 microamps 30/-, 0-500 microamps 25/-, 0-50 milliams 19/6, 0-10 v. 15/-, 0-20 v. 15/-, 0-200 17/6, 0-500 v. 22/6, Ediswan 3in. square instruments flush D.C. 0-50 mA. 19/6, 0-250 v. 22/6. Rectified A.C. 0-8 amps. 19/6, 2 1/2 in. round, dual purpose 200 mA. and 75 mA. or 100 mA. 75 v. with res. box 22/6. Please add 2/6 P.P. on all meters.

### HEAVY DUTY SLIDER RESISTORS Zenith Double Tube Geared Drive Log Wound.

1.3Ω 15 amps. Continuing to 55Ω 2 amps. Overall size: 22 x 9 1/2 x 7 1/2 in. £3/19/6, Carr. 7/6. 4Ω 8 amps. Single Tube enclosed, 32/6. P.P. 4/-, 30Ω 1.25 amps. 5 Tube Gear Drive, 25/-, P.P. 3/-, 15Ω 12 amps. 12/6, P.P. 2/6 Ganged Twin Rheostats. 6in. dia. 200Ω 1.2 amps. each. Complete with Fixing Frame and Control Knob, 75/-, carr.

### G.P.O. HIGH SPEED COUNTERS

Latest Design Type 1000 4.1Ω 3-6 v. D.C. Type 100 a. 500Ω 18.24 v. D.C. either type 15/-, P.P. 1/6.

### MAGNETIC DEVICES MINIATURE RELAYS

2000Ω 2 C.O. contacts size 1 x 1 1/2 x 1/2 in. 10/6. P.P. 1/-.

### MAGNETIC DEVICES SOLENOIDS

180 v. D.C. Type 42661. Overall size 1 1/2 x 1 1/2 x 1 1/2 in. Approx. 1/2 in. pull. 5/-, P.P. 1/6, 48/- per doz. P.P. 4/-, Other types available.


### LOW RESISTANCE CHOKES to Smooth

40 amps. 1/2 ohm. Size 7 x 7 x 5 1/2 in. 65/-, Carr. 7/6. Other types available. Let us know your requirements.

### EHT TRANSFORMERS

Gardners "C" core. Sealed. Oil filled. Pri. tapped 200-250 v. Sec. 4,000 v. 10 mA., 4 v. 1.5 amp., 4 kV. wkg., 2-4 v. 2 amp., 4 kV. wkg., £3/15/-, Carr. 6/-, Pearce. Pri. tapped 200-250 v. Sec. 3,000 v. C.T. 20 mA. 35/-, P.P. 4/-, Air Ministry. Pri. 240 v. Sec. 1000-0-3000 v. 20 mA. Sec. 1000 v. 100 mA., 4 v. 2 amp., 35/-, P.P. 5/-.






**CYLDON A.M./F.M. PERMEABILITY TUNER FOR ALL TRANSISTOR OPERATION**

Size 2½in. x 2½in. approx. By famous manufacturer. A.M.-I.F. 470 Kc/s. F.M.-I.F. 10.7 Mc/s. A.M. coverage from 1,620 Kc/s-525 Kc/s. F.M. coverage 108 Mc/s.-88 Mc/s. Circuit diagram 2/6. FREE with Tuner. 1st, 2nd, 3rd A.M.-I.F.'s 1st, 2nd, 3rd and 4th F.M.-I.F.'s V.H.F. Osc. choke A.M.-F. trap. A.F. 114 and A.F. 115. All the above are the R.F. end of an AM/FM receiver car radio etc. The above six items.

**£2.10.0**

**BSR MONARCH UA14 With FUL-FI HEAD**

4-speed, plays 10 records, 12in. 10in. or 7in. at 16, 33, 45 or 78 r.p.m. Intermixes 7in., 10in. and 12in. records of the same speed. Has manual play position: colour, brown. Dimensions: 12½ x 10½in. Space required above baseboard 4½in., below baseboard 2½in. Fitted with Ful-Fi turnover crystal head, £5/19/6. P. & P. 6/6.  
**B.S.R. UA16**, similar to the above, £6/12/6. P. & P. 6/6.  
**B.S.R. GU7**, 4-speed, single player, complete with pick-up on unplate with automatic switch. £3/19/6. P. & P. 5/6.



**FLOURESCENT LIGHT KIT**


**TWIN 20 CHOKE** instant start complete with 4 bi-pin 200/250 v. holders

**11'6** P. & P. 4/-

**TWIN 40 CHOKE** instant start with 4 bi-pin 200/250 v. holders.

**17'6** P. & P. 4/-

**TRANSISTOR INVERTOR**



50 v. D.C. Input. Output 240 v. A.C. 40 Watts incorporating transformers, choke, condensers and 2 Get 573. In solid 16 gauge Aluminium Case size 15in. x 6in. x 2½in. by **19'6** plus 6/- famous manufacturer.

**FLOURESCENT LIGHT FITTING**



Twin 40 watt 200 250 v. less tubes. **59'6** P.&P. 6/-

**RINGO BURLGAR ALARM**

A.C. Mains 200/240 volt. Fire salvage slightly tarnished. List price 7 gns. Our price complete with double gong bell five micro switches and full instructions.



**49'6** P.&P. 4/-

**AC MAINS MOTOR**


Can be used for a variety of purposes, silent running, satisfactory in every way, 230/250 v. A.C. **9'6** P.&P. 2/-



**SILICON RECTIFIERS** 250 v. P.I.V. 750 milli-amps. Six for 7/6d. post paid.

**6 VALVE 15 WATT PUSH PULL AMPLIFIER**  
 15 x 7 x 1½ A.C. mains 200-250 volts. 4 inputs with controls for same and bass and treble lift controls. Tapped for 3 and 15 ohm speakers. Extra H.T. and L.T. for F.M. Tuner supplies etc., built and tested. 7 gns. plus 12/6 P. & P.

**SIGNAL GENERATOR**



Covering 100 Kc/s-100 Mc/s. on fundamental and 100 Mc/s. to 200 Mc/s. on harmonics. Metal case 10in. x 6½in. x 5½in. grey hammer finish. Incorporating three miniature valves and metal rectifier. A.C. mains 200/250 v. Internal modulation of 400 c.p.s. to a depth of 30%. Modulated or unmodulated R.F. output continuously variable, 100 millivolts C.W. and mod. switch, variable A.F. output. Incorporating magic-eye as output indicator. Accuracy plus or minus 2%.

**£7'5'0** Post and packing 6/6 extra.

**3 to 4 WATT AMPLIFIER KIT** comprising chassis 8½in. x 2½in. x 1in. Double wound mains transformer, output transformer, Volume and tone controls, resistors, condensers etc. 6V6 ECC81 and metal rectifier circuit 1/6 free with kit. **29'6** plus 4/- P. & P.

**MAINS TRANSFORMERS**

**ALL WITH TAPPED PRIMARIES 200/250 VOLTS**

250-0-250 v. 60 mA., 6.3 v. 1.5 amp., 6.3 v. 1 amp. ....	11'6
250-0-250 v. 80 mA., 6.3 v. 1.5 amp., 6.3 v. 1 amp. ....	15'-
250-0-250 v. 50 mA., 6.3 v. 2 amp. ....	9'6
250-0-250 v. 250 mA., 6.3 v. 5 amp. ....	19'6
Heater Transformer 6.3 v. c.t. 2 amp. ....	7'6

Postage and packing on all the above transformers 4/-  
 Primary 230-240 v., Secondary 330-0-330 v. 200 mA., 6.3 v. c.t. 6 amp., 5 v. 4 amp. 21/- P. & P. 6/-

**POCKET MULTI-METER.** Sizes 3½ x 2½ x 1½in. Meter size 2½ x 1½in. Sensitivity 1,000 OPV on both A.C. and D.C. A.C. and D.C. volts 0-15, 0-150, 0-1,000. D.C. current 0-150 mA. Resistance 0-100KΩ. Complete with test prods, battery and full instructions. 35/- Plus 1/6 P. & P.

**50 MICRO-AMP. METER**  
 Movement by world-famous manufacturer. Size 3in. x 2½in. 25/- plus 1/6 P. & P.



**THE MOTORIST'S REV. COUNTER**

Kit of parts comprising 270 degree 3in. moving coil movement. Manufacturer's present price of this movement would be at least £7. Complete with full instructions and circuit diagram. Scale calibrated up to 8,000 r.p.m. Can be used with any 4 or 6 cylinder car. **49'6** Plus 3/6 P. & P.

**FIXED FREQUENCY SIGNAL GENERATOR**

Crystal control in metal case, size 10in. x 6in. x 6in. Incorporating 2 FC13 valves, mains transformer, metal rectifier, choke, indicator lamp, crystal and numerous components. Modulated and unmodulated output sockets. Originally used for I.T.V. frequencies. Brand new. 39/6 + 6/- P. & P. A.C. Mains 200/250 volts.



**SPECIAL OFFER — Power Supply Kit**

To purchasers of "Elegant Seven" parts, incorporating mains transformer etc. AC mains 200/250v output 9v 100 mA 7/6.

**THE "Elegant Seven"**

- Combined Portable and Car Radio
- ★ 7-transistor superhet. Output 350 mW.
  - ★ Two-tone grey wooden cabinet, fitted handle with silver-coloured fittings, size 12½in. x 8½in. x 3½in.
  - ★ Horizontal tuning scale, size 11½in. x 2½in. in silver with black lettering.
  - ★ All stations clearly marked.
  - ★ Ferrite-rod internal aerial.
  - 4in. SPEAKER. Parts list and circuit diagram 2/6. FREE with parts.

- The Radio with the "Star" Features
- ★ IF 460 kc/s.
  - ★ Operated from PP9 battery.
  - ★ Fully comprehensive instructions and point-to-point wiring diagram.
  - ★ Printed circuit board, back-printed with all component values.
  - ★ Fully tunable over medium and long waveband.
  - ★ Car aerial socket.
  - ★ Full after-sales service.

**RADIO AND T.V. COMPONENTS (ACTON) LTD.**

21A, HIGH ST., ACTON, LONDON, W.3.  
 Goods not despatched outside U.K. All enquiries S.A.E. Terms C.W.O.  
 SHOP HOURS 9 a.m.—6 p.m. EARLY CLOSING WEDNESDAY



**ONLY £4.19.6**  
 PLUS 5/6 POST & PACKING

# WIRECOMP ELECTRONICS BARGAINS FOR THE RADIO ENTHUSIAST



**NOW-THE SKYROVER Mk. II**

With new redesigned cabinet, edgewise controls, new colour tuning scale and cabinet in Sierra Tan.  
Controls: Waveband Selector, Volume Control with on/off switch. Tuning Control with easy to read Dial Scale. In attractive plastic cabinet, size 10x6 1/2 x 3 1/2 in., with metal trim and carrying handle.  
**MAY NOW BE BUILT FOR £8.19.6**  
H.P. Terms: 20/- dep. & 11 months at 16/6.

## THE SKYROVER & SKYROVER De Luxe

**GENERAL SPECIFICATION FOR BOTH MODELS**  
7-transistor and 2-diode superhet—6 waveband portable receiver, covering the full Medium Waveband (180-576 M.) and Short Waveband (32-94 M.) and in addition 4 separate switched Band Spread Ranges on 13M, 16M, 19M and 25M Bands—with Manual Band Spread Tuning for accurate Station selection. L.F. frequency 470 Kc/s. Output 500 M.W. Bin. Ceramic Magnet P.M. Speaker. Telescopic and internal Ferrite Rod Aerial. All Mullard Transistors and Diodes. The coil pack and tuning heart is completely factory assembled, wired and tested. The remaining assembly can be completed in under three hours from our detailed and easy to follow instructions. Operates on four 1.5 v. torch batteries (U2 or equivalent).

**THE SKYROVER De Luxe.** Tone Control Circuit is incorporated with separate Tone Control in addition to Volume and Tuning Controls and Waveband Selector. In sturdy wood cabinet, size 11 1/2 x 6 1/2 x 3 in., covered in washable material with plastic trim and carrying handle. Also Car Aerial socket.  
**MAY NOW BE BUILT FOR £10.19.6** H.P. Terms: 25/- deposit and 11 months at 20/-  
All parts sold separately.

A simple additional circuit provides coverage of the 1,100/1950 M. band (including 1,500 M. Light programme). This is in addition to all existing Medium and Short wavebands. All necessary components with construction data. **Only 10/- extra** Post Free. This conversion is suitable for both models that have already been constructed

Circuit diagram and data for each set 2/6 extra, free if all parts bought. Four U2 batteries 3/4 extra. Add 5/- P. & P. on each parcel.

## COMMUNICATION RECEIVERS



**MODEL HE30**

Covers range from 540 Kc/s to 50 Mc/s. Ham Band is provided with a scale for

direct reading, and can also be band spread. Facilities: A.N.L., A.V.C. and M.V.C. Q Multiplier also serves as B.F.O. H.F. stage and two I.F. stages ensure high sensitivity and selectivity. Valve line up: 3x6BA6, 2x6BE6, 2x6AV6, 1x6G5 and 5Y3. 2 Aerial Sections. Standby position for use with a transmitter. 8 meter fitted. 200-250 v. A.C. mains. Brand new and unused. Bored with full instruction manual, in attractive steel cabinet, grey crackle finish. Cabinet size 15x8x3 1/2 in. Dial 12x4 in.

**WIRECOMP'S PRICE 33 GNS.** C. & P. FREE.  
ALSO AVAILABLE AS A KIT 25 GNS. C. & P. FREE.  
H.P. Terms (Ready Built): £8/13/- deposit and 11 monthly payments of £2/16/-.

**MODEL HE40** Covers medium wave band and 1.6-4.4 Mc/s. 4.5-11.0 Mc/s. 11.0-30.0 Mc/s. in separate switched band spread ranges. Controls include B.F.O. Sensitivity, A.N.L. Receiver—Stand-by Switch, Tone Switch, S-Meter. For 200/250 v. A.C./D.C. Internal loop and telescopic antennae fitted. Valve line-up: 12BE6, 12BA6, 12AV6, 50C5, and metal rectifier. Size 12 1/2 x 8 1/2 x 5 1/2 in. Instruction manual included. No Kits available.

**WIRECOMP'S PRICE 19 GNS.** C. & P. 10/-  
H.P. Terms £4 dep. and 11 months at £1/12/-.

**MODEL HE80** 14-valve super sensitive communication receiver. Frequency range 540 Kc/s—30 Mc/s. and 144-146 Mc/s. Dual conversion on 2 metres, with extra B.F. stage. Single R.F. stage, two I.F. stages on all other bands. B.F.O. and Q-multiplier circuits. Improved A.N.L. and voltage regulated power-pack. "S" meter, band spread on amateur bands, large illuminated dial with logging scale. All controls fitted. Outputs for speaker and phones. Valve line-up: 4x6AQ5, 3x6BA6, 2x6BE6, 1x6BL5, 6AL5, 6AQ5, 6CA4 and OA2. Steel case 17x7 1/2 x 10 in. For 200/250 v. A.C. mains. Brand new with full instruction manual. No Kits available.

**WIRECOMP'S PRICE 59 GNS.** C. & P. FREE  
H.P. Terms £12/19/- dep. and 11 monthly payments of £4/18/-.

## GUITAR/PA AMPLIFIERS THE VIKING "TRANSISTOR 50"

50 watts output. Superb amplifier for all music and P.A. work—ideal



for guitars, groups, etc. Fully transistorised for maximum efficiency. 4 inputs with mixing facilities plus reverbation/echo chamber, bass and treble controls. Fully built and guaranteed. In strong wood cabinet covered in washable material, size approx. 22x10x6 in. Output imp. 15 ohms. For operation on 200/250 v. A.C. mains.

**WIRECOMP'S PRICE 45 GNS.** C. & P. 10/-

**VIKING "SOUND 30"** High quality valve model guitar and P.A. amplifier. A.C. Mains operated—30 watt output, 8 inputs, fitted with 4 separate volume controls for mixing also Bass and Treble controls. 15 ohms out. British made—highest quality components used throughout—fully guaranteed. In strong portable case, size approx. 20x9x6 in.

**WIRECOMP'S PRICE 35 GNS.** Carr. & Pack. 7/6 extra.

**TRANSISTOR POCKET RADIOS**  
BOYS 2 Transistor. Ready built complete with personal carrying case, battery and carrying case! Wonderful value and performance—full medium waveband coverage—built-in 2 1/2 in. speaker. Works on single PP3 9 v. batt. In plastic case—size only 4x2 1/2 x 1 in. **WIRECOMP'S PRICE 42/-** POST FREE

6 Transistor Model. Fully built-in plastic case. 4 in. x 2 1/2 in. x 1 in. with 2 1/2 in. speaker. Complete with personal carrying case, batt. and leather case. Tunable over full medium waveband. **WIRECOMP'S PRICE 69/6** POST FREE.

## THE 'REALISTIC 7'

The famous 7-transistor home construction receiver—still available. Full medium and long waveband coverage 4 in. speaker, etc.  
**MAY BE BUILT FOR £5.19.6**  
P. & P. 4/6.  
Battery 3/9.



De Luxe version with wood cabinet full vision dial only £1 extra. All parts available separately. Data and instructions 2/6, refunded if you purchase parcel.



## IMPORTED SPEAKER THE HARROW 12A11

12 in. Thin line, two-way speaker. 15 ohms imp. Power Handling 15-20 watts. Rigid die-cast frame. Roll surround. Bulk purchase before import increase enables us to offer this quality speaker at this incredibly low price.  
**WIRECOMP'S PRICE £4.19.6**  
P. & P. 3/6.

## THE TRANSTOGRAM

A portable battery operated fully transistorised Record Player—made by famous British manufacturer, fully guaranteed. Size only 6 1/2 x 10 1/2 in. Weight 10 lbs. Operates on 6 U2 torch batteries. 4 speeds—16 2/3, 33 1/3, 45 and 78 r.p.m. Goldring Cymet player with CM-60 cartridge. 5 in. loudspeaker fitted into lid. Cabinet constructed of wood, covered in two tone (pale blue/grey) leather cloth. High quality amplifier with tone and vol. controls gives excellent reproduction. Plays 7 in., 10 in. and 12 in. records. Today's value 12 gns.  
**WIRECOMP'S £6.19.6** 6-U2 batts. 4/- extra (leak proof 5/-) Carr. & Ins. 7/6.

## INTERNATIONAL TAPE

Finest Quality American brand—fully guaranteed

5in. Double play, 1,200ft. Mylar base	15/-
5in. Long play, 900 ft. Acetate base	10/-
5in. Standard play, 600ft. P.V.C. base	8/6
6 1/2 in. Long play, 1,200ft. Mylar base	15/-
6 1/2 in. Double play, 1,800ft. Mylar base	22/6
6 1/2 in. Long play, 1,200ft. Acetate base	12/6
6 1/2 in. Standard play, 850ft. P.V.C. base	11/6
7in. Standard play, 1,200ft. Mylar base	12/6
7in. Long play, 1,800ft. Mylar base	19/6
7in. Double play, 2,400ft. Mylar base	25/-
7in. Long play, 1,800ft. Acetate base	15/-
3in. Message tape, 150ft.	8/6
3in. Message tape, 225ft.	4/11
3in. Message tape, 300ft.	7/6
3in. Triple play, 450ft. Mylar base	12/6
3in. Triple play, 900ft. Mylar base	22/6
3in. Triple play, 1,800ft. Mylar base	42/6
6 1/2 in. Triple play, 2,400ft. Mylar base	55/-
7in. Triple play, 3,600ft. Mylar base	75/-

P. & P. 1/- extra per reel; 4 reels and over Post Free.

**ENTHUSIASTS LOOK!**  
**NEW LONDON BRANCHES NOW OPEN**  
Personal callers invited to our new Branch—323 Edgware Rd., W.2.  
Full range of the latest Hi-Fi equipment, components, etc.  
**WIRECOMP'S BARGAIN STORE**  
48 Tottenham Court Road, London, W.1. Thousands of bargains—Stocks constantly changing—rock bottom prices.

## SUPER TAPE RECORDER OFFER



**SIEMENS STEREO TAPE RECORDERS**  
High precision machines offering a maximum of facilities for the enthusiast and connoisseur. Exceptionally fine performance standards ensuring superb reproduction. All models have the following general specification. ★ Completely self contained—record, replay and audio amplifiers built-in. ★ All transistorised—no warming-up period required. ★ Three heads (separate record-replay-erase) also provides sound-on-sound recording. ★ Three speeds—7 1/2, 3 1/2, 2 1/2 i.p.s. ★ 4 tracks. ★ Takes 7 in. reels. ★ Record level indicators on both channels. ★ Remote control facilities. Other facilities on these exceptional machines include—push button controls; tape end stop; separate switched bass boost and treble cut; sep. inputs for 2 mikes, 2 pick-ups and 2 radios with provision for mixing 3 inputs. Outputs provided are two at 4 ohms; 2 sets headphones and 2 external amplifiers. Power output 2 1/2 watts per channel. New, boxed and fully guaranteed.  
**MODEL 12** (Illustrated). Self-contained portable with 2 built-in speakers. List price 94 Gns.  
**WIRECOMP'S PRICE 59 GNS.** Carr. & Ins. 15/-  
**MODEL 14.** Built on a contemporary styled wood plinth with one built-in speaker. List price 87 Gns.

**WIRECOMP'S PRICE 49 GNS.** Carr. & Ins. 15/-

## THE NEW 'KUBA' IMPORTED AM/FM STEREO RADIOGRAM CHASSIS



Long, medium and short waveband coverage, plus V.H.F./F.M. Piano key wavechange. Separate frequency tuning on A.M. and F.M. Bass, treble and balance controls. Magic-eye tuning indicator. Ferrite rod aerial. The very latest printed line-up: ECC85, ECC801, ECC85, ELL80, EAF801. Full vision tuning scale size 21 x 6 in. Overall dimensions 21 x 6 1/2 x 8 in. Made to the very highest standards. 3Q output. 5 watts per channel.  
**WIRECOMP'S PRICE 29 1/2 GNS.** Carriage and Insurance 12/6 extra.

# VALVES

Brand new, individually packed and guaranteed

AC/HL 4/6	DL94 5/9	EF74 4/-	HL23 6/-	PL83 5/-	U75 .11/-	ILH4 4/-	6AM5 2/6	6LD20 5/9	128G7 3/-	225DD 9/-	C.R. Tubes
AC4 6/-	DL96 5/6	EF80 5/-	HL23DD	PL84 6/6	U27 .8/-	1N21B 5/-	6AM6 4/-	6N7 .6/-	128H7 3/-	307A .5/6	CV1596
AC6PEN 5/-	DL18 3/-	EF88 4/6	HL41 4/-	PL24A 5/-	U52 .5/-	1N43 4/-	6AQ5 7/9	6N7G .5/9	128J7 5/9	313C .25/6	(09J) 55/-
AL60 5/-	DL19 15/-	EF98 5/-	HL41 4/-	PL25H 7/6	UABCO80 4/6	1N70 .4/-	6AQ5W 9/-	6Q7G .6/-	128K7GT	357A .7/9	E4504/B/16
AR8 .5/-	EL148 2/6	EF99 3/9	HVE2 9/-	PT25H 7/6	YBF50 5/6	1R5 .5/6	6AS6 4/-	6RT .5/6	128N7GT	398A .5/-	28/-
ARP .3/6	EL148 2/6	EF99 3/9	K3A .30/-	PT25H 7/6	YBF50 5/6	1R5 .5/6	6AS6W 5/9	6SA7 .5/-	128N7GT	398A .5/-	VCR97 28/-
ARP3 4/6	EL148 2/6	EF99 3/9	K3A .30/-	PT25H 7/6	YBF50 5/6	1R5 .5/6	6AS6W 5/9	6SA7 .5/-	128N7GT	398A .5/-	VCR138
ARP12 2/6	EL148 2/6	EF99 3/9	K3A .30/-	PT25H 7/6	YBF50 5/6	1R5 .5/6	6AS6W 5/9	6SA7 .5/-	128N7GT	398A .5/-	VCR138A
ARP21 7/-	EL148 2/6	EF99 3/9	K3A .30/-	PT25H 7/6	YBF50 5/6	1R5 .5/6	6AS6W 5/9	6SA7 .5/-	128N7GT	398A .5/-	VCR138A
ARP24 3/6	EL148 2/6	EF99 3/9	K3A .30/-	PT25H 7/6	YBF50 5/6	1R5 .5/6	6AS6W 5/9	6SA7 .5/-	128N7GT	398A .5/-	VCR138A
ARTP1 6/-	EACB80 5/-	EL32 3/8	KT66 12/9	PX4 14/-	UF41 7/-	2C26A 3/-	6BA7 3/6	6AT6 3/6	6AUG 7/-	6AX4 8/-	VCR517B
ATP4 2/3	EAC91 3/6	EL34 .10/-	KT67 15/9	PX25 9/-	UL41 6/-	2C34 .2/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517C
ATP7 5/6	EAC92 3/6	EL36 .5/-	KT76 8/6	PX32 9/6	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517D
AU7 55/-	EA89 2/4	EL38 .17/6	KT88 15/-	PY32 2/6	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517E
BL63 10/-	EB91 3/-	EL41 7/-	KTW61 4/6	PY80 5/6	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517F
BS4 .8/-	EB3C3 7/-	EL42 .8/-	KTW63 2/6	PY81 5/6	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517G
BS5 20/-	EB3C4 7/-	EL50 .8/-	KTW63 2/6	PY82 5/6	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517H
BS84 47/6	EB3C5 7/-	EL51 .8/-	KTW63 2/6	PY83 5/6	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517I
B2134 16/-	EBF80 5/-	EL53 .6/3	LP2 .10/-	PY83 5/6	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517J
BT19 25/-	EBF83 7/6	EL54 .5/-	LR3 .5/-	PY83 5/6	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517K
BT35 25/-	EBF89 6/9	EL55 .8/-	M8100 9/-	PY83 5/6	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517L
BT45 150/-	EC52 4/6	EL91 .4/6	M8142 12/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517M
BTR3 35/-	EC53 12/6	EL95 .5/-	M8190 5/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517N
CC3L 25/-	EC70 4/-	EM80 6/6	MH4 5/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517O
CL33 .9/-	EC80 9/-	EM81 7/6	MHL610/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517P
CV71 3/-	EC91 3/-	EM84 6/3	ML6 .6/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517Q
CV77 .6/-	EC91 3/-	EM85 9/-	N108 .8/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517R
CV102 1/-	EC92 5/-	EN31 10/-	NE17 7/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517S
CV103 4/-	EC93 6/-	ESU208 9/-	NGT2 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517T
CV104 7/-	EC94 7/6	EY34 5/6	OD3 .7/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517U
CV4025 10/-	EC95 6/6	EY35 6/-	OC3 .5/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517V
CV4218 10/-	EC96 4/-	EY36 6/-	OD3 .5/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517W
CV4218 10/-	EC97 4/-	EY37 3/-	OD3 .5/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517X
CV4046 40/-	EC98 7/6	EY38 3/-	OZ4 .4/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517Y
CV31 .5/6	EC99 8/-	EZ41 6/6	OZ4A .5/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517Z
DI .1/6	EC99 8/-	EZ40 5/6	PC84 5/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517A
D41 .3/3	EC99 8/-	EZ41 6/6	PC85 12/6	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517B
D61 6/-	EC99 8/-	EZ41 6/6	PC88 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517C
D77 .3/3	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517D
DA30 12/6	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517E
DA80 75/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517F
DA96 6/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517G
DD41 4/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517H
DD5 8/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517I
DET20 2/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517J
DET25 15/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517K
DF73 5/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517L
DF91 3/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517M
DF92 3/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517N
DF96 6/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517O
DK92 6/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517P
DK96 5/6	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517Q
DL92 5/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517R
DL93 6/-	EC99 8/-	EZ41 6/6	PC89 10/-	Q102 7/8	UL84 5/6	2C43 5/6	6BB6 4/3	6B7 7/-	6B8 7/-	6B9 7/-	VCR517S

Owing to 15% surcharge a few of these valves will be increased by 10%

MANY OTHERS IN STOCK including Cathode Ray Tube and Special Valves.

All U.K. orders below £1 P. & P. 1/-; over £1 2/-; orders over £3 P. & P. free: C.O.D. 3/6 extra. Overseas Postage Extra at Cost.

### MARCONI COMMUNICATION RECEIVER CR150/2

Frequency coverage 1.5-22 Mc/s. in 4 bands. Two L.F.s Ist 1,600 kc/s. 2nd 465 kc/s. Image signal protecting over 40 dB up to 30 Mc/s and 20-40 dB from 30-60 Mc/s. Self-checking calibration (built-in calibrator). Stabilisation of supply and temperature compensation. Electrical and mechanical bandspread. Metering and visual tuning indicator. Band pass from 100 cfs. to 10 kc/s. in 5 stages. Acoustic filter associated with 100 cfs. Bandpass position for CW reception. Facilities for diversity reception. Excellent checked condition. £35. Mains P.S.U. by P.C.A. Radio. £4/10/0, carriage 30/-.

### SEALED HIGH SPEED SIEMENS RELAYS. 1700+1700 ohm, 15V-. P. & P. 1/6.

### DUMONT MODEL 241 OSCILLOSCOPE in fully working condition £22/10/-. P. & P. 30/-.

### "CONNECT AND FORGET, CANNOT OVERCHARGE" "ESSTRON" MARK I AUTOMATIC BATTERY CHARGER.

Initial charging rate 6-7 amps. The charging rate automatically adjusts itself to the charge in the battery. Automatic current and voltage control. Patented application of magnetic amplification to battery charging. Indicator lights show battery fully charged, receiving charge incorrectly connected or faulty cells. Mains voltage 200/250 v. Built for 6 or 12 v. batteries. Measurements 7 x 5 x 5 1/2 in. Weight 8 1/2 lb. Price £7/19/6. P.P. 3/6.

### SIGNAL GENERATOR MARCONI TF 995A-I.

Range 1.5-220 Mc/s. in 5 bands. Output voltage variable in 1 dB steps from 1µV to 100 mV. Carrier may be unmodulated, frequency modulated, amplitude modulated, or simultaneously frequency and amplitude modulated. Frequency deviation is variable from 25-600 kc/s. for FM and modulation (internal or external) up to 50% for AM. Crystal calibrator for checking frequencies incorporated. Incremental frequency control. Fully checked and guaranteed. Price £83/15/-. Carriage in U.K. 30/-.

### WELL PROVEN RELIABLE COMMUNICATION RECEIVER P.C.R.2.



(Made by Pye.) 120 kc.—350 kc. 525 kc.—1,600 kc. 6 Mc.—22 Mc. Overall sensitivity 1-2µV. S/Noise ratio 10 dB at 6 µV. Circuit incorporates an R.F. stage, two I.F. stages, tone control, A.V.C. antenna trimmer, 6V6 output. Set in fully working condition together with headphones and speaker plug. £7/12/6, carriage 15/-. Ditto but with built-in power supply for 210/250 v. A.C. £9/19/6. Carriage 15/-.

### AR88 RECEIVERS. Fully reconditioned, £55, rebuilt models £85. Brand new £95. Carriage paid U.K.

### CARBON INSET MICROPHONE. G.P.O. types 2/6. P. & P. 1/6.

### RELAYS. Large selection of new relays type 600 and 3,000.

### TELEPHONE HANDSET. Standard G.P.O. type, new 12/- . P. & P. 2/-.

### TRANSFORMERS. Large selection of mains and Heavy Duty L.F. TRANSFORMERS.

**P. C. RADIO LTD.**  
 170, GOLDHAWK RD., W.12  
 SHEpherd's Bush 4946

32/34FT. AERIALS each consisting of ten 3ft. 1/2 in. dia tubular screw-in sections, 14ft. (7 section), whip aerial with adaptor to fit the 1/2 in. rod, insulated base, stay plate and stay assemblies, pegs, reamer hammer, etc. Absolutely brand new and complete, ready to erect, in canvas bag. £21/9/6. P. & P. 10/6.

### CONNECTORS FOR TCS RECEIVER TRANSMITTER AND REMOTE CONTROL with original plugs on both ends. New, £1/17/6 each. P. & P. 2/6.

### PANEL METERS (round)

0-50 microamps	2 1/2 in.	D.C.**	40/-
0-100 microamps	2 1/2 in.	D.C.**	35/-
0-100 microamps	2 1/2 in.	D.C.**	30/-
0-100 microamps	2 1/2 in.	D.C.**	35/-
0-500 microamps	2 1/2 in.	D.C.	30/-
0-500 microamps	3 1/2 in.	D.C.	37/6
0-1mA	2 in.	D.C.	19/6
0-1mA.	3 1/2 in.	D.C.**	35/-
0-5mA.	3 1/2 in.	D.C.	45/-
0-100mA.	3 1/2 in.	A.C.	22/6
150-0-1,500mA.	3 1/2 in.	D.C.	29/-
0-100mV.	3 1/2 in.	D.C.	32/6
0-5 v.	3 1/2 in.	A.C.	22/6
0-15 v.	2 1/2 in.	A.C.	17/6
0-50 v.	2 1/2 in.	D.C.	28/-
0-150 v.	2 1/2 in.	A.C.	24/-
0-300 v. (shunt)	2 1/2 in.	D.C.	20/-
0-100 V.	2 1/2 in.	D.C.	63/-

### POWER SUPPLY & L.F. AMPLIFIER UNIT NO. 3. Input 12 v. 3 amp. Output 145 v. 50 mA. Synchronised vibrator and extremely efficient smoothing. Stabilized heaters supply. Valves, IL4 and 3A4. Many practical possibilities, i.e., car radio, etc. Diagram supplied. Brand new, 37/6. P. & P. 8/-.

### VARIOMETER for No. 19 set, 17/6 each. P. & P. 3/-.

### Large Selection of SPARE PARTS for 53 TRANSMITTERS.

### NEW CHR. HIGH-RESISTANCE HEADPHONES. 14/- . P. & P. 1/6.

### EVERSHED MEGGER CIRCUIT TESTER 2 ranges. 0-1,000 ohms. 100-20,000 ohms. with test leads, leather carrying case. Tested £4/19/6. P. & P. 3/6.

# LASKY'S RADIO

# London's Largest Stocks of Audio Equipment THE HOME OF HI-FIDELITY

COMPLETE MONO/STEREO SYSTEMS TO YOUR SPECIFICATION AT LASKY'S SUPER PRIVILEGE PARCEL PRICES.

## DEMONSTRATION STUDIOS

Hear and compare the very latest  
**HI-FI EQUIPMENT**

Visit our spacious showrooms at 33 Tottenham Court Road, 207 Edgware Road or 152-3 Fleet Street, whichever is most convenient. In our Demonstration Studios you can see, examine, hear and compare the very latest products in the realm of high-fidelity reproduction.

● TAPE RECORDERS ● TAPE DECKS ● MICROPHONES ● AMPLIFIERS ● CONTROL UNITS ● AM/FM TUNERS ● RECORD PLAYERS ● AUTOCHANGERS ● TRANSCRIPTION TURNTABLES ● PICK-UPS ● LOUDSPEAKERS ● SPEAKER SYSTEMS ● CABINETS AND ENCLOSURES ● TRANSISTOR RADIOS.

by all the well-known makes including;—

ARMSTRONG	G.E.C.	LORENZ	STELLA
BRENELL	GOLDRING	LOWTHER	STUZZI
CHAPMAN	GOODMANS	LUSTRAPHONE	TANDBERG
COLLARO	GRUNDIG	ORTOFON	TANNOY
CONNOISSEUR	HARTING	PAMPHONIC	TELEFUNKEN
COSSOR	H.M.V.	PHILIPS	THORENS
DULCI	JASON	QUAD	TRUVOX
E.A.R.	KORTING	RESLO	VORTEXION
ELIZABETHAN	LEAK	ROGERS	W.B.
FERRORAPH	Lenco	SIMON	WEARITE
FI-CHORD	LINEAR	SOUND	WHARFEDALE
GARRARD			

If you cannot pay us a visit please send us details of your choice of equipment and we shall be pleased to quote. See Complete Systems.

## COMPLETE SYSTEMS

A Lasky's "Privilege Parcel" allows you to purchase the Audio System of your choice at a worth-while cash saving. We shall be pleased to quote our "Privilege Parcel" Prices for any selection of equipment of your own choice. Send us details of your requirements. H.P. Terms can be arranged on Privilege Parcels.

## RECORD PLAYERS

### 4-SPEED AUTO-CHANGERS



**SCOOP! LASKY'S CAN NOW OFFER B.S.R. AUTOCHANGERS AT LOWEST EVER PRICES!**

All brand new and fully guaranteed—complete with cartridge and stylus.  
 UA16 4-speed mains model £4 19 6  
 UA14 4-speed 9 v. battery operated £5 19 6  
 UA20 4-speed £5 19 6  
 Add 5/- P. & P. on each.

**GARRARD**  
 Auto-Slim Mono £6 10 0  
 Auto-Slim Stereo £7 10 0  
 Auto-Slim Mono Plug-in head £7 7 0  
 Auto-Slim De Luxe Mono AT6 £11 9 0  
 Auto-Slim De Luxe Stereo AT6 £12 5 0  
 ATSP, Mono £10 8 2  
 ATSP, Stereo £11 5 11  
 3000LM with stereo cartridge £11 11 11  
 Postage on all above 5/-.

### TRANSCRIPTION MOTORS

GARRARD 4HP, ster or mon	£15 19 6
GARRARD 401	£32 10 0
GARRARD Lab. 80, Mono	£28 17 8
GARRARD Lab. 80, Stereo	£29 15 5
GARRARD 301 (Strobe)	£21 0 0
GARRARD A with GCS	£19 14 0
GARRARD with EV26A	£20 10 0
PHILIPS AC1016	£12 12 0
BRAUN PCAL Stereo	£12 9 6
CONNOISSEUR	
Craftsman II	£17 2 11
Craftsman III	£22 19 6
Model B	£25 4 0
LENCO GL58	£17 1 9
LENCO G88	£18 18 5
LENCO GL70	£27 9 4

THORENS 135	£35 8 4
THORENS TD124	£38 7 4

**SINGLE PLAYERS**  
 Auto start and stop. With pick-up and crystal cartridge.  
 GARRARD T.A. Mk. II Mono £7 17 3  
 GARRARD SRP10 latest model single player with G.C.S. £5 9 11  
 E.M.I. 4-speed STEREO £3 19 6  
 COLLARO JUNIOR 4-speed motor and pick-up 69/6  
 6 volt battery version, 4-speed with pick-up 69/6

All other current models available  
 Postage on all above 5/- extra.

## OUTSTANDING SINGLE PLAYER OFFER EMI 4-SPEED RECORD PLAYER

New, unused and individually boxed fitted with light-weight pick-up with ACOS G.P. 73/2 stereo cartridge. Cabinet space required 13" x 12 1/4" x 4 1/2". 9in. metal turntable is fitted with Auto-stop. For use on 200/250 volt A.C. Mains. The stereo cartridge will play all types of Mono Records. 78s, L.P.s, etc., but if desired a G.P. 67 LP/78 Mono cartridge will be supplied in lieu of the GP73 at no difference in cost.



**LASKY'S PRICE 79/6** P. & P. 3/6.

## AMPLIFIERS

### VIKING-LASKY "TRANSISTOR 50"

50 watts output. Superb amplifier for all music and P.A. work—ideal for guitars, groups, etc. Fully transistorised for maximum efficiency. 4 inputs with mixing facilities plus reverberation/echo chamber. Fully built and guaranteed. In strong wood cabinet covered in washable material, size approx. 22 x 10 x 6in. Output imp. 15 ohms. For operation on 200/250 v. A.C. mains.



**LASKY'S PRICE 45 GNS.** P. & P. 10/-.

### VIKING "SOUND 30"

High quality valve model. Guitar and P.A. amplifier. A.C. Mains operated—30 watt output, 8 inputs, fitted with 4 separate volume controls for mixing also Bass and Treble controls. 13 ohms out. British made, highest quality components used throughout, fully guaranteed. In strong portable case, size approx. 20 x 9 x 6in.

**LASKY'S PRICE 35 GNS.** Carr. & Pack. 7/6 extra.

## ARMSTRONG EQUIPMENT

We stock all the latest models by this famous manufacturer.

Illustrated: Model 227M—AM/FM Tuner Amplifier.

A.F. 208	£21 4/-
Model 227M	£35 15/-
Model 223	£28 15/-
Stereo 55	£29 18/-
Model 227	£52 15/-
Model 226	£81 7/-
Model 222 Amp.	£27 10/-
Model 224	£22 10/-
T.A.c.	£17 19/-
T.A.b.	£20 8/-
127M	£26 10/-
127	£37 10/-



S.T.B. Mk. II £25 12/-  
 A-20 Stereo Amp. £23 12/6  
 P.C.U. 25 Stereo Pre-amp. £21 7/-  
 Optional cases £3 10/-  
 H.P. Terms available.

## MICROPHONES

**AIWA DM-31**—Dynamic Stick Microphone with Bass. Available with 50 K $\Omega$ , 500 $\Omega$ , or 35 $\Omega$  impedance. Frequency 50-15,000 c/s. Sensitivity: 75 dB (800 $\Omega$  and 35 $\Omega$ )—55 dB (500 $\Omega$ ). Non directional. Beautifully finished in satin chrome and matt black. Complete with removable table stand and lead.  
**LASKY'S PRICE £6 19/6.** P. & P. 2/6.

**LAFAYETTE PA-400**—Uni-Directional Dynamic Microphone. Superbly made and finished. Dual impedance 600 $\Omega$ , 50K $\Omega$ . Frequency range 50-15,000 c/s. Diecast body with adjustable elbow. Satin chrome and matt black finish. Complete with lead.  
**LASKY'S PRICE 11 gns.** P. & P. 2/6.

**BM-3**. High impedance crystal stick microphone with removable base and muting switch. Finished in black enamel and chrome. Complete with lead, neck harness and stand adaptor.  
**LASKY'S PRICE 39/6.** P. & P. 2/6. Heavy matching table base. 12/6. P. & P. 2/6.

**DM-304**. Dual impedance dynamic with on/off switch. Satin chrome finish. Complete with lead.  
**LASKY'S PRICE 89/6.** P. & P. 2/6.

**DX-29**. High imp. Dynamic mic. Die cast metal pencil body. Complete with stand and lead.  
**LASKY'S PRICE 59/6.** P. & P. 2/6.

**DX-62**. High impedance dynamic with on/off switch. Chrome/enamel finish. Complete with lead.  
**LASKY'S PRICE 89/6.** P. & P. 2/6.

**DM-13**. High impedance dynamic. Directional. With on/off switch. Satin chrome finish. Complete with lead.  
**LASKY'S PRICE £5 5/-.** P. & P. 2/6.

**FILM INDUSTRIES TYPE M3 RIBBON MICROPHONE**. New and unused. Low imp. Complete with 12ft. twin screen cable and 4in. stay-put flexible tube. Listed at £9 15/-.  
**LASKY'S PRICE £6 19/6** P. & P. 2/6.  
 Heavy metal table base for above 10/- extra.

## SPECIAL INTEREST ITEMS!

### THE HARROW POWER PACK

Battery eliminator for portable radios, etc. Converts your battery radio to A.C. mains. Replaces 4 1/2 v. 6 v. and 9 v. bats. Size only 3in. x 2 1/2in. x 2 1/2in. **LASKY'S PRICE 29/6** P. & P. 2/-.  
 State Voltage required when ordering.

### THE PETIT FULMETER

Operates direct from 200-250 A.C. Same size as PP3. **18/6** P. & P. 1/6.  
 Designed to replace PP3 9 v. battery.

### GUITAR PICK-UPS

**CGM5** Crystal—high imp. Size only 1 1/2in. x 1 1/2in. x 1 1/2in. Clips to finger board—no screws. Complete with cable. **LASKY'S PRICE 15 1/11.** P. & P. 1/2.  
**CGM35**. Magnetic—high imp. Fully adjustable pick-up position carrier. Simply fixed. Separate tone and volume control. Heavy chrome finish. Pick-up size 3 1/2in. x 1 1/2in., control size 2 1/2in. x 1 1/2in., complete with long lead and screened jack plug.  
**LASKY'S PRICE 59/6.** P. & P. 1/6.

# LASKY'S FOR ALL TEST GEAR & TECHNICAL ADVICE

# Equipment and Components

## AND TAPE RECORDERS

THE FINEST RANGE OF MONO/STEREO MAINS AND TRANSISTORISED PORTABLES



### TAPE RECORDERS

#### SPECIAL NEW YEAR OFFER

#### SIEMENS STEREO TAPE RECORDERS

High precision machines offering a maximum of facilities for the enthusiast and connoisseur. Exceptionally fine performance standards ensuring superb reproduction. All models have the following general specification:  
 ★ Completely self-contained—record, replay and audio amplifiers built-in.  
 ★ All transistorised—no warming up period required.  
 ★ Three heads (separate record—replay—erase), also provide sound-on-sound recording.



★ Three speeds—7 $\frac{1}{2}$ , 3 $\frac{3}{4}$ , 1 $\frac{1}{2}$  i.p.s. ★ 4 tracks ★ Takes 7in. reels. ★ Record level indicators on both channels. ★ Remote control facilities. Other facilities on these exceptional machines include:— Push button controls; Tape end stop; Separate switched bass boost and treble cut; Sep. inputs for 2 mikes, 2 pick-ups and 3 radios with provision for mixing 3 inputs. Outputs provided are two at 4 ohms; 2 sets headphones and 2 external amplifiers. Power output 2 $\frac{1}{2}$  watts per channel. New, boxed and fully guaranteed.

MODEL 12 (illustrated). Self-contained portable with 2 built-in speakers. List Price 94 GNS. **LASKY'S PRICE 59 GNS.**  
 MODEL 14. Built on a contemporary styled wood plinth with one built-in speaker. List Price 87 GNS. **LASKY'S PRICE 49 GNS.**  
 Carriage and Insurance 15/- extra on each.

### HIGH QUALITY TAPE RECORDERS

Supplied complete with crystal microphone, reel of tape and empty spool, also screened lead for recording from radio, pick-up, etc. The following specifications are common to all three models: Tone Control, Visual Recording Indicator. Inputs: Microphone, Radio, Record-Play, Radiogram, Telephone Adaptor, Fully Automatic Erase. Facilities: Fast spooling, forward and reverse. Valves: Latest Mullard Miniature types. Rectifier: S.T.C. or Westinghouse Metal Rectifier. Loudspeaker: Standard 3 ohm with extension speaker socket. Microphone: new super sensitive crystal in the new easy to hold microphone case. Carrying Case: Portable case with detachable lid, harmonising gold trim and automatic safety locks. Storage cubby for microphone and accessories. Covered in new type washable scratch resistant Vinyl. Size for Models A and B: 14 $\frac{1}{2}$  x 14 x 6 $\frac{1}{2}$ in. Size for Models C & D: 14 x 12 $\frac{1}{2}$  x 6 $\frac{1}{2}$ in.

**MODEL A** Studio Deck. Four Track. Speeds 1 $\frac{1}{2}$ , 3 $\frac{3}{4}$  and 7 $\frac{1}{2}$  i.p.s. Spool capacity: 15 mins. Wow and flutter: Less than 0.15% total. Playing Times: up to 25 hours. Frequency Response: 12,000 c.p.s. at 7 $\frac{1}{2}$  i.p.s. Mains Voltage 200-250 v. 50 c/s A.C. Output 3 watts. **LASKY'S PRICE 27 GNS.** Carriage and Insurance 15/- extra.

**MODEL B** Studio Deck. Two Track. Specification as for Four Track model above, except that this is fitted with Two Track Studio Tape Deck. Maximum Playing Time: up to 9 hours from one reel of tape. **LASKY'S PRICE 25 GNS.** Carriage and Insurance 15/- extra.

**MODEL C** Fitted with B.S.R. Deck, two-track version. Specification: Single speed, 3 $\frac{3}{4}$  i.p.s. Freq. response 10,000 c.p.s. at 3 $\frac{3}{4}$  i.p.s. Spool capacity: 5 $\frac{1}{2}$ in. Mains voltage 200-250 v. 50/60 c/s. A.C. Wow and flutter: Less than 0.2% total. Output: 3 watts. Playing time up to 3 hours. **LASKY'S PRICE 18 GNS.** Carriage and Insurance 15/- extra.

**MODEL D** Fitted with B.S.R. Four Track Deck—otherwise same specification as the Model C but maximum playing time increased up to 6 hrs. **LASKY'S PRICE 21 GNS.** Carriage and Insurance 15/- extra.

H.P. Terms are available on the above models.

### SPEAKERS

#### SPECIAL BARGAIN OFFERS

**FANE 12" TYPE 122/17 (Illustrated right)**  
 Power handling 25 watts—15 ohms imp. Flux density 17,000 gauss. Special Anisotropic magnet. Listed at £11/17/6. Limited stock. **LASKY'S PRICE £5/19/6** P. & P. 5/-.



**WHARFEDALE WNA. 12** 12in. 15Q imp. Flux density 14,000 oer/ds. Maximum input 15 watts RMS, 30 watts peak. Frequency range 25-4,000 c.p.s. Cone fitted with roll surround. **WHARFEDALE SUPER 5** 5in. mid range and high frequency speaker, 10Q imp. Frequency range 100-17,000 c.p.s. Aluminium voice coil. These two speakers provide an ideal matched pair for a full range Hi-Fi speaker system. Both brand new, unused and individually boxed. **LASKY'S PRICE £12/19/6 THE PAIR** (1—WNA, 12 & 1—SUPER 5) Carriage and Packing 10/-.

**VARIABLE CROSSOVER** THE HARROW CV 1. Gives variable volume control of Woofer and Tweeter. Strong metal construction. Size 4in. x 2 $\frac{1}{2}$ in. x 1 $\frac{1}{2}$ in. Screw tag connections. **LASKY'S PRICE 22/6** P. & P. 1/6.

### HI-FI FURNITURE

by **RECORD HOUSING**

The full range of Record Housing equipment—cabinets, speaker enclosures, etc., stocked. Delivered anywhere. Catalogue FREE on request.



### CONSTRUCTORS BARGAINS

#### THE NEW "KUBA" IMPORTED AM/FM




#### STEREO RADIOGRAM CHASSIS

Long, medium and short waveband coverage, plus V.H.F./F.M. Piano key wavechange. Separate fly-wheel tuning on A.M. and the very latest printed circuitry. Provision for multifer. 5 valves: line-up: ECC85, ECH801, ECC83, 6X4, 6X5, 6X6. Full vision tuning scale size 21 x 6in. Overall dimensions 21 x 6 $\frac{1}{2}$  x 8in. Made to the very highest standards. 3Q output. 5 watts per channel.

**LASKY'S PRICE 29 $\frac{1}{2}$  GNS.** Carriage and insurance 12/6 extra.

#### JASON

High quality home construction units for the discerning Hi-Fi enthusiast. We stock the complete range of component parts.



#### FM & AM/FM TUNERS

FM1.	Can be built for	£8 15	0.	P. & P. 2/6 extra.
FM2.	Can be built for	£10 12	0.	P. & P. 4/- extra.
FM3.	Can be built for	£12 5	0.	P. & P. 4/- extra.
Mercury II.	Can be built for	£10 12	6.	P. & P. 2/6 extra.
JTV2.	Can be built for	£15 10	0.	P. & P. 4/- extra.
JTL Stereo tape link-comp. kit		£22 1	0.	P. & P. 4/- extra.
<b>TEST EQUIPMENT</b>				
AG 10 Audio Gen.	Can be built complete for	£15 19	0.	P. & P. 4/- extra.
OG 10 Scope	Kit price exc. tube	£17 19	6.	P. & P. 4/- extra.
W 11 Wobulator	Can be built complete for	£14 19	0.	P. & P. 4/- extra.
EM 10 Valve voltmeter	Can be built complete for	£23 0	0.	P. & P. 4/- extra.

### BUILD A H.GH QUALITY TAPE RECORDER

Using the famous Collaro "STUDIO" deck and MARTIN pre-assembled amplifiers 2- or 4-track models.

**COLLARO STUDIO TAPE DECK.** Latest model 3 speed, 3 motors. Takes 7in. reels. Fitted with half-track heads. **LASKY'S PRICE £10/10/-.** New and Unused. Carr. & Pack. 7/6.

**COLLARO STUDIO TAPE DECK.** As above but fitted with the latest quarter-track heads. **LASKY'S PRICE £13/19/6.** Carr. & Pack. 7/6.

**MARTIN TAPE RECORDER AMPS.** Designed for use with Collaro Studio Tape Deck. In sub-assemblies for immediate installation. 6 valve circuit. Comprehensive instructions make final assembly as simple as possible. Everything supplied including valves, etc. Monitoring facilities. 3 ohm output, speed equalising, etc. For 200-250 v. A.C. mains. **PRICES** 1-track Model £11/11/-, 4-track Model £12/12/-, P. & P. 2/6.

Portable carrying case designed to take the Collaro Studio Tape Deck and the Martin Tape Amplifier. Fitted with 9 x 6 in. speaker. Price complete with speaker £25/5/-, P. & P. 5/-.

### THE BH-14 HI-FI MONO AMPLIFIER KIT

High quality 14 watt power amplifier, with separate volume controls on each input, also bass and treble controls. Inputs: 1.5 m/v., 2-40 m/v. Output impedance 3 or 15 ohms. 5 valves—line-up: 2 x 6L84, 1 x 6P86, ECC83 and E281. Frequency response 15 c/s.—20 Kc/s. Ideal for the discerning Hi-Fi enthusiast or as guitar amp. Gold hammer finish with distinctive Perspex front panel. Complete kit of parts with detailed construction data. **MAY BE** Carr. & Pack. 7/6 extra. **AVAILABLE READY BUILT AND BUILT FOR 9 GNS.** Ins. book available sep. 1/6. **TESTED. 11 GNS.** P. & P. 7/6.

### FROM PRE-AMP TO 20 WATT HI-FI STEREO ASSEMBLY

BY BUILDING WITH MARTIN AUDIOKITS AVAILABLE FROM STOCK.  
 Using specially developed circuits, the very latest transistors and printed circuits—these kits are all fully checked and tested before leaving the factory. Although the kits are basically designed for use together the pre-amplifier and mixer stages may be used to great advantage with existing valve or transistor equipment.

KIT 1. 5-stage Matching Input Selector Unit	<b>LASKY'S PRICE 47/6.</b>
KIT 2. Pre-amplifier with volume control	<b>LASKY'S PRICE 37/6.</b>
KIT 3. 3-Channel Mixer, with plug-in adaptors for individually matching each circuit. Adaptors 8/6 each.	<b>LASKY'S PRICE 79/6.</b>
KIT 4. Pre-amplifier with tone/volume control stages	<b>LASKY'S PRICE 62/6.</b>
KIT 5. 10 & 3 watt Main Amplifier	<b>LASKY'S PRICE £5/12/6</b>
KIT 6. Power supply Converter Unit	<b>LASKY'S PRICE £2/6.</b>
KIT 7. 15 ohm version of Kit 5	<b>LASKY'S PRICE £6/12/6</b>
KIT 8. Power supply for Kit 7	<b>LASKY'S PRICE £2/15/-.</b>

### TAPE DECK MOTORS

Motors for the Collaro Studio Deck—new and unused. 200-250 v. A.C. Take-up and rewind. Listed at £2/5/- each. **LASKY'S PRICE 14/11 each** P. & P. 2/6. State motor required when ordering.

High quality tape deck capstan motor made by E.M.I. Holland. Bi-directional. Size 4in. dia. x 2in. high, 1in. x 1in. spindle. **LASKY'S PRICE 19/11** P. & P. 3/6.

SEND FOR OUR LATEST BARGAIN BULLETIN. 20 foolscap pages. Hundreds of Bargains for the "ham" and service man. PRICE 6d. POST FREE.

## LASKY'S FOR D.I.Y. CONSTRUCTION BARGAINS

1WW-142 FOR FURTHER DETAILS.

P.T.O. FOR MORE NEWS

# LASKY'S RADIO

# For The Finest Value and TRANSISTOR RECEIVERS

THE WIDEST RANGE AVAILABLE TODAY FOR HOME CONSTRUCTION OR READY BUILT TO HIGHEST STANDARDS

We consider our Construction Parcels to be the finest value available on the home construction market. If on receipt you feel not competent to build the set, you may return it as received within 7 days, when the sum paid will be refunded less postage.

## TRANSISTOR PORTABLES

### THE SKYROVER AND SKYROVER DE LUXE



**GENERAL SPECIFICATION**  
7 transistor plus 2 diode superhet, 6 waveband portable receiver.

The SKYROVER and SKYROVER DE LUXE cover the full Medium Waveband and Short Waveband 31-94M., and also 4 separate switched band-spread ranges, 13M., 16M., 19M., and 25M., with Band Spread Tuning for accurate Station Selection. The coil pack and tuning heart is completely factory assembled, wired and tested. The remaining assembly can be completed in under three hours from our easy to follow stage by stage instructions. Superhet, 470 Kc/s. All Mullard Transistors and Diode. Uses 4 U2 batteries. 5in. Ceramic Magnet P.M. Speaker. Easy to read Dial Scale, 500 MW Output. Telescopic Aerial and Ferrite Ioni Aerial.

**NEW! SKYROVER MK. II** (Illustrated). Now supplied with redesigned cabinet, edgewise controls, new colour tuning scale and cabinet in Sierra Tan. Controls: Waveband Selector, Volume Control with on/off switch, Tuning Control. In plastic cabinet, size 10 1/2 x 6 1/2 x 3 1/2 in. with metal trim and carrying handle.

Can now be built for **£8.19.6** P. & P. 5/- extra. H.P. Terms: £1 deposit and 11 monthly payments of 16/6.

**The SKYROVER De Luxe** Tone Circuit is incorporated, with separate Tone Control in addition to Volume Control. Tuning Control and Waveband Selector. In a wood cabinet, size 11 1/2 x 6 1/2 x 3 in. covered with a washable material, with plastic trim and carrying handle. Also car aerial socket fitted.

Can now be built for **£10.19.6** P. & P. 5/- extra. H.P. Terms: 25/- deposit and 11 monthly payments of 20/-.

Data for each receiver: 2/6 extra. Refunded if you purchase the parcel. Four U2 batteries 3/4 extra. All components available separately.

★ **LONG WAVEBAND COVERAGE IS NOW AVAILABLE FOR THE SKYROVER & SKYROVER DE LUXE** A simple additional circuit provides coverage of the 1100/1950 M. band (including 1500 M. Light programme). This is in addition to all existing Medium and Short wavebands. All necessary components with construction data.

Only **10/-** extra Post Free. This conversion is suitable for Skyrover and Skyrover De Luxe receivers that have already been constructed.

### REALISTIC SEVEN

Fully tunable over long and medium wavebands. Uses 7 Mullard Transistors; plus Diode O.470.

STAR features:

- 7 Transistor Superhet. ● 350 Milliwatt output 4in. high flux speaker. ● All components mounted on a single printed circuit board, size 5 1/2 in. x 5 1/2 in. in one complete assembly.
- Plastic cabinet, with carrying handle, size 7 1/2 x 10 1/2 x 3 1/2 in. in blue grey. ● Easy to read dial. ● External socket for car aerial. ● I.F.-frequency 470 Kc/s. ● Ferrite rod internal aerial. ● Operates from PP9 or similar battery. ● Full comprehensive data supplied with each receiver. ● All coils and I.F.s, etc., fully wound ready for immediate assembly. An outstanding Receiver.



Can be built for **£5.19.6** P. & P. 4/6.

**REALISTIC SEVEN De Luxe** By popular request a De Luxe version of the well-known Realistic Seven now available. With the same electrical specification as standard model—PLUS A SUPERIOR WOOD CABINET IN CONTEMPORARY STYLING covered in attractive washable material, with super-chrome trim and carrying handle. Also a full vision circular dial, externally mounted to further enhance the pleasant styling. **ONLY £1 EXTRA**

Both models: Battery 3/9 extra. (All components available separately). Data and instruction separately 2/6, refunded if you purchase parcel.

### SINCLAIR SUPER MINIATURES

**THE SINCLAIR MICRO-6** Self-contained pocket radio size only 1 1/2 x 1 1/2 x 1 1/2 in. A marvel of modern miniaturisation—truly amazing performance. Without a doubt the most advanced transistor circuit ever offered to home constructors—yet may be built in an evening. Complete with earphone and detailed construction data. Mercury cell 1/11 extra (2 required). All parts sold separately. **CAN BE BUILT FOR 59/6**

**THE SINCLAIR SLIMLINE** The new 2-transistor pocket radio size only 2 1/2 in. x 1 1/2 in. x 1 1/2 in. Easy to assemble. **CAN BE BUILT FOR 49/6**

**THE NEW SINCLAIR X10** 10 watt power amplifier fitted with integrated pre-amplifier. Requires only 1 mV. for an output of 10 watts undistorted. Frequency response is flat 1 dB from 5 c/s. to 20 kc/s. Size only 6 x 3 x 3 in. Weight 6 oz. Built on printed circuit. Operates from 12v. D.C. at 75 mA. quiescent. Circuit uses 7 M.A.T.s and 4 RF power transistors. **KIT PRICE £5.19.6 POST FREE**

AVAILABLE READY BUILT, TESTED AND GUARANTEED. £6/19/6 POST FREE. 3 pots. for vol., Bass and Treble, 7/6 the 3 extra. Mains power pack, if required, 5/4/-.

### MINIATURE EARPIECES

for Transistor Radios, Transparent ear C.R.5. Crystal high imp. 5 0  
M.R.4. Magnetic low imp. 5 0

## READY BUILT BARGAINS

### THE "TRANSISTOGRAM" IDEAL GIFTS

A portable battery operated fully transistorised Record Player—Made by famous British manufacturer, fully guaranteed. Size 6 1/2 x 12 x 10 1/2 in. Weight 10 lb. Operates on 6 U2 batts. 4 speeds—16 2/3, 33 1/3, 45 and 78 r.p.m. Guiding Cygnet player unit with lightweight pick-up fitted with CM-50 turn over ceramic cartridge. Output 500 mW into 5in. ceramic magnet speaker fitted into lid for maximum sound distribution. Cabinet constructed of wood, covered in two tone (pale blue/grey) leather cloth. High quality amplifier with tone and vol. controls gives excellent reproduction. Plays 7in., 10in. and 12in. records. Today's value 12 gns.



LASKY'S PRICE **£6.19.6** New and guaranteed. Carr. & Ins. 7/6.  
6 U2 batts. 4/- extra. (Leakproof 5/-)

### TRANSISTOR POCKET RADIOS

Ideal Gifts—all supplied complete with personal earpiece, battery and carrying case. Fully guaranteed—ready to use. **POST FREE.**

#### BOY'S 2 TRANSISTOR

In attractive plastic case. Size only 4in. x 2 1/2 in. x 1in. Fitted with 2 1/2 in. loudspeaker. Socket for personal earpiece. Uses PP3 battery. Tunable over full medium waveband.

LASKY'S PRICE **42/-**

#### BOY'S 1 TRANSISTOR

Personal mini-radio—fully built in strong plastic case, size 3 1/2 x 2 1/2 x 1 1/2 in. Complete with telescopic aerial, earphone and PP3 type batt. (No case)

LASKY'S PRICE **25/-**

#### 6 TRANSISTOR MODEL

Fully built in plastic case, 4in. x 2 1/2 in. x 1in. with 2 1/2 in. speaker. Uses single PP3 type battery Tunable over full medium waveband.

LASKY'S PRICE **69/6**

2 Waveband (Long and Medium) Model  
Size 5 x 3 1/2 x 1 1/2 in. Cream/black plastic case  
Real leather carrying case.

LASKY'S PRICE **£5.9.6**

### TRANSISTORISED TAPE RECORDERS

A few only still available. High quality models. Prices from 13 Gns. to 20 Gns. See our advertisement "W.W." Sept., 1964, for details.

### BABY ALARM/INTERCOM

Fully transistorised miniature intercom that has all the features of sets many times its size. Battery consumption is exceptionally low and makes this system particularly suitable for use as a Baby Alarm. Specification: 2 transistor; Sensitivity: more than 55 dB. Power: one 3 v. PP9 or equiv. (approx. life 50 hours). Size of units 4 x 2 1/2 x 1 1/2 in. The sturdy plastic cabinets are finished in ivory and silver with chrome stands. **LASKY'S PRICE 59/6 P. & P. 2/6.**



## CONSTRUCTORS BARGAINS

### TRANSISTORS

ALL BRAND NEW AND GUARANTEED

GET 81, GET 85, GET 86 2/6; 837A, 874P 3/6; OC45, OC71, OC81D 4/6; OC44, OC70, OC76, OC81 (match pair 10/8) 5/6; AF117, OC75, OC170, OC290 6/6; OC42, OC43, OC73, OC82D 7/6; OC201, OC204 15/-; OC205, OC206 19/6; OC28 24/6.

### TRANSFILTERS

By BRUSH CRYSTAL CO. Available from stock.


TO-01B 465kc/s. ± 2 kc/s. TO-02D 470 kc/s. ± 1 kc/s. **6/6 EACH**  
TO-01D 470 kc/s. ± 2 kc/s. TF-01B 465 kc/s. ± 2 kc/s. P. & P. 6d.  
TO-02B 465 kc/s. ± 1 kc/s. TF-01D 470 kc/s. ± 2 kc/s.

### STAAR KINDER RECORD PLAYER

45 r.p.m. 6 v. Batt. operated. Complete with pick-up fitted crystal cartridge, size only 7 1/2 x 6 1/2 in. Fitted auto. stop and start. New and perfect. Suitable for use with both the below listed amplifiers.

LASKY'S PRICE **49/6** P. & P. 2/6

NOW IN STOCK—2 speed model for 33 1/3 and 45 r.p.m. (As illustrated) **59/6** P. & P. 2/6.



NPN-PNP Transformerless Transistor Amplifier. Smallest ever, size 1in. x 1in. x 1in. Output 125 MW from 9 v. batt. Uses 3 transistors. Single-ended push-pull output. Fully assembled. **LASKY'S PRICE 29/6.** Post 2/6.  
400 MW Output version of above amp., 52/6. Post 2/6.

### HI-FI TAPE RECORDER HEADS

Upper or lower track. LASKY'S PRICE 29/6. Post free per pair. State track required. MARRIOTT "X" Type 1-track heads. LASKY'S PRICE 4 GNS. pair. 1-track heads Record/Play and Erase. LASKY'S PRICE 59/6 pair. MICHIGAN 1-track heads. LASKY'S PRICE 5 GNS. pair. BOGEN 1-track heads. LASKY'S PRICE 7 GNS. pair.



### PANEL METER

Full scale deflection 1 mA. Scaled 1 to 10 and "Record Level". Flush mounting—plastic construction. Easy to read. Size: 2 1/2 in. sq. x 1 1/2 in. deep. **LASKY'S PRICE 19/6.** P. & P. 1/6.

P.T.O. FOR MORE NEWS

LASKY'S FOR SPEEDY MAIL ORDER SERVICE

1W-143 FOR FURTHER DETAILS.

# Service in Great Britain CONSTRUCTORS BARGAINS

## HUGE STOCKS OF COMPONENTS, TEST GEAR, ETC. SPEEDY MAIL ORDER SERVICE

# LASKY'S RADIO

### COMMUNICATION RECEIVERS

A HUGE PURCHASE BEFORE IMPORT DUTY INCREASE ENABLES US TO OFFER THESE RECEIVERS AT EVEN LOWER PRICES!

#### MODEL HE30

Covers range from 540 Kc/s. to 30 Mc/s. Ham Band is provided with a scale for direct reading, and can also be hand spread. Facilities: A.N.L., A.V.C. and M.V.C. Q Multiplier also serves as B.F.O. H.F. stage and two I.F. stages ensure high sensitivity and selectivity. Valve line up: 3x6BA6, 2x6BE6, 2x6AV6, 1x6Q5 and 6Y8. 2 Aerial Sockets. Stand-by position for use with a transmitter, 8 meter fitted. 200-250 v. A.C. mains.

Brand new and unused. Boxed with full instruction manual, in attractive steel cabinet, grey crackle finish. Cabinet size 15 x 8 x 10in. Dial 12 x 4in.

**LASKY'S PRICE 33 GNS. | KIT PRICE 25 GNS. | C. & P. FREE**

H.P. Terms (Ready Built): £6/13/- deposit and 11 monthly payments of £2/16/-.

#### MODEL HE40

Covers medium wave band and 1.6-4.4 Mc/s., 4.5-11.0 Mc/s. 11.0-30.0 Mc/s. in separate switched band spread ranges. Controls include B.F.O. Sensitivity, A.N.L. Receiver—Stand-by Switch, Tone Switch, 8-Meter. For 200/250 v. A.C./D.C. Internal loop and telescopic antennae fitted. Valve line-up: 12BE6, 12BA6, 12AV6, 6OC5, and metal rectifier. Size 13 1/2 x 8 1/2 in. Instruction manual included. No Kits available.



H.P. Terms 24/- dep. and 11 months at £1/12/- Carriage & Packing 10/-.

**LASKY'S PRICE 19 GNS.**



**MODEL HE80** 14-valve super sensitive communication receiver. Freq. range 540 Kc/s.—30 Mc/s. and 144-146 Mc/s. Dual conversion to 2 metres, with extra R.F. stage. Single R.F. stage, two I.F. stages on all other bands. B.F.O. and Q-multiplier circuits. Improved A.N.L. and voltage regulated powerpack. "8" meter, band spread on amateur bands, large illuminated dial with logging scale. All controls fitted. Outputs for speaker and phones. Valve line-up: 6AL5, 6AQ5, 6CA4 and 0A2. Steel case 17 x 7 1/2 x 10in. For 200/250 v. A.C. mains. Brand new with full instruction manual. No Kits available.

H.P. Terms £12/19/- dep. and 11 monthly payments of £4/18/- Carriage & Packing FREE.

**LASKY'S PRICE 59 GNS.**

### INTERNATIONAL TAPE

Famous American Brand—Fully Guaranteed at record low prices. In sealed cartons.

6in. Double play, 1,200ft. Mylar base	15/-
6in. Long play, 900ft. Acetate base	10/-
6in. Standard play, 600ft. P.V.C. base	8/6
6 1/2in. Long play, 1,200ft. Mylar base	15/-
6 1/2in. Double play, 1,800ft. Mylar base	22/6
6 1/2in. Long play, 1,200ft. Acetate base	12/6
6 1/2in. Standard play, 850ft. P.V.C. base	11/6
7in. Standard play, 1,200ft. Mylar base	12/6
7in. Long play, 1,900ft. Mylar base	19/6
7in. Double play, 2,400ft. Mylar base	25/-
7in. Long play, 1,800ft. Acetate base	15/-
8in. Message tape, 150ft.	3/6
8in. Message tape, 235ft.	4/11
8in. Message tape, 300ft.	4/11
9in. Triple play, 450ft. Mylar base	12/6
9in. Triple play, 900ft. Mylar base	22/6
9 1/2in. Triple play, 1,800ft. Mylar base	42/6
9 1/2in. Triple play, 2,400ft. Mylar base	55/-
7in. Triple play, 3,500ft. Mylar base	75/-

### RECORDING TAPE SPLICER

By famous manufacturer, all metal nickel plated construction. With separate razor blade, security clamps tape while splicing. Listed at 18/6.

**LASKY'S PRICE 14/6** Post Free.

### NO INCREASE IN OUR PRICES!

It has always been our policy to keep prices as low as possible and our huge purchasing power and sales potential even enables us to reduce our prices when others are forced to increase theirs.

**THERE WILL BE NO PRICE INCREASE ON OUR IMPORTED GOODS WHILE OUR PRESENT EXTENSIVE STOCKS LAST!**

### EXPORT MODEL—SUPER TV OFFER

625 line T.V. chassis (Export Model). For 200-250 v. A.C./D.C. mains. Fitted with Band 1-111 turret tuner. Fully loaded with 12 sets of coils for all CTR channels in these bands. E/M sound. Made by famous British manufacturer. 15 Mullard valves. Electrostatic focus and deflection. Will take 17in., 19in., 21in. or 23in. CRT. All controls fitted. Supplied new and unused with all valves. 7in. x 4in. speaker and 17in. CRT (less cabinet).

**LASKY'S PRICE £25** Carr. & packing FREE to any part of the World. (Tube sent at buyer's risk). An allowance of £3 will be made if the CRT is not required. Circuit data included FREE.

### TEST EQUIPMENT

#### The "Sixteen" Multirange METER KIT

This outstanding meter was featured by Practical Wireless in the Jan. '64 issue. Lasky's are now able to offer the complete kit of parts as specified by the designer.

#### RANGE SPECIFICATION

D.C. volts: 0-2.5-25-50-250-500 at 20,000Ω/V.  
A.C. volts: 0-25-60-250-500 at 1,000Ω/V.  
D.C. current: 0-50μA, 0-2.5-50-250 mA.  
Resistances: 0-2000Ω, 0-200kΩ, 0-20MΩ.  
Basic movement: 40μA f.s.d. moving coil. With universal shunt full scale deflection current is 50μA.  
Size/finish: Black plastic case—3 1/2 x 5 1/2 x 1 1/2 in.  
Controls: 12 position range switch; separate slide switch for A.C. volts—D.C. ohms; ohms zero adjustment pot. meter; meter zero. External connections: Two 4 mm. sockets for test lead plugs. Power requirements: One 1.5 v. and one 1.5 v. batts. Complete with all parts and full construction details.



H.P. Terms: 21/- deposit and 5 monthly payments of 21/- Data and circuit available separately, 2/6; refunded if all parts bought. Pair of batteries 2/5 extra.

**LASKY'S PRICE £5.19.6**

P. & P. 5/-

### READY BUILT TEST METERS

All brand new—complete with test leads and batts.	
HAIKI 20,000 O.P.V. ....	LASKY'S PRICE £5 19 6
TE-13 1,000 O.P.V. ....	LASKY'S PRICE £1 19 6
TMK-500 30,000 O.P.V. ....	LASKY'S PRICE £8 17 6
200-H 20,000 O.P.V. ....	LASKY'S PRICE £5 5 0
P-1 2,000 O.P.V. ....	LASKY'S PRICE £2 12 6
P-3 4,000 O.P.V. ....	LASKY'S PRICE £4 2 6
MT-559 50,000 O.P.V. ....	LASKY'S PRICE £10 19 6

Also complete range of Avo and Taylor Meters and Test Equipment in stock.

### NOMBREX TEST EQUIPMENT

#### MODEL 27 TRANSISTORISED SIGNAL GENERATOR (illustrated)

Wide range—160 kc/s. to 350 Mc/s. Accuracy better than 2%. Direct calibration. AF, RF and MOD. Battery operated. Light weight and strongly made. Complete with test leads and batts.

**LASKY'S PRICE £9.11.3** Post Free.

#### OTHER NOMBREX MODELS AVAILABLE ALL TRANSISTORISED.

#### MODEL 63. Wide range AUDIO GENERATOR.

10-100 Kc/s. £16/15/0.

#### MODEL 66. Wide range INDUCTANCE BRIDGE.

1μH to 100H in 4 ranges. Measures Q. £18/0/0.

#### POWER SUPPLY UNIT

1 to 15 v. D.C. up to 0.1 amp. 230/250 v. A.C. mains. **£6.10.0** P. & P. 2/6.



### CRYSTAL PICK-UP CARTRIDGES LOWEST PRICES EVER!

All Complete with Stylus L.P. and Standard (and Stereo where shown), fully guaranteed. Standard Fitting will fit most P.U. Arms and Heads. Postage 1/- extra each.

Garrard Mantric T.O.M.2	15/-
Acos G.P. 8.9	14/-
Acos G.P. 65/3	15/-
Acos G.P. 65/1	17/-
Acos G.P. 67/1	14/-
STEREO Acostereo 73/1, with 2 sapphires	25/-
Acostereo 73/2, with diamond LP/Stereo and sapphire Std.	29/6
Ronette Stereo O.V. Turnover, with 2 sapphires	25/-
Ronette Stereo type 105 and 106 with 2 sapphires	25/-
Ronette Stereo type 105 and 106 with diamond LP/Stereo and sapphire Std.	35/-

### AND EVEN LOWER PRICES

Save money! Some of these cartridges are cheaper than stylus!  
C.T.1 Mono, 2 sapphires ..... 4/11  
Collaro Type C, 2 sapphires, stereo ..... 15/6  
Collei 8C1 Diamond LP, stereo ..... 17/6  
Sonotone ST, stereo ..... 19/10  
Sonotone 2TA, mono, ..... 15/6  
Postage 1/- extra each.

### TAPE POSITION INDICATOR

Open type—as used by most makers. With re-set knob. **3 DIGIT 7/6. 4 DIGIT 10/6.** P. & P. 8d. on each.

**ELECTRONICS (FLEET ST.) LTD. 152/3 FLEET STREET, E.C.4. 207 EDGWARE ROAD, W.2. 33 TOTTENHAM COURT ROAD, W.1.**

Near "Daily Express" Building. FLEet St. 2833. Open all day Thursday. Close 1 p.m. Saturday.

Few yards from Praed Street. PADddington 3271/2. Open all day Saturday. Close 1 p.m. Thursday.

2 mins. Oxford Street. Nearest Station, Goodge Street. MUSeum 2605. Open all day Saturday. Close 1 p.m. Thursday.

PLEASE ADDRESS ALL MAIL ORDERS TO OUR HEAD OFFICE:—207 EDGWARE ROAD, W.2

**LASKY'S RADIO FOR FINEST VALUE and COURTEOUS SERVICE**

1WW-144 FOR FURTHER DETAILS.

**LOUDSPEAKERS**



We supply a complete range of Goodmans, Wharfedale, Stentorian, TSL Speaker Units and complete systems. A comprehensive leaflet is available on request, this covers specifications and prices of nearly 50 types including—

- Celestion Model CX2012 (as illustrated) £16 10 0
  - Stentorian HF812 5 watts £3 16 0
  - Stentorian HF1012 10 watts £4 12 0
  - Goodmans Axiette 8 6 watts £5 5 7
  - Goodmans Axiom 10 10 watts £6 5 11
  - Goodmans Axiom 201 15 watts £10 17 4
  - Wharfedale Super 8/RS/12/DD 6 watts £6 14 2
  - Wharfedale Golden RS/DD 8 watts £7 17 5
  - Wharfedale RS/12/DD 15 watts £11 10 0
  - Guitar Speakers include—
  - Wharfedale W12EG 15 watts £10 10 0
  - Goodmans Audiom 51B 15 watts £9 2 8
- Carriage and Insurance extra.

**THE "TRAVLER" Mk. II CAR RADIO**

Our new ready built transistorised car radio for only **9 1/2 Gns.** P. & P. 5/-



including 7x4in. speaker fitted to baffle, fixing brackets, filter unit, all nuts and bolts with fitting instructions.

**STAR FEATURES:**

- ★ Handsomely Styled ★ Mullard Valves and Transistors
- ★ Push Buttons ★ 1 1/2 watts Output ★ Long and Medium Wavebands
- ★ Quality Speaker (E.M.I.) ★ Easily fitted
- ★ Radio Luxembourg (and many other foreign stations)
- ★ 12-volt Positive Earth only (applies to 99.8% of cars on the road)
- ★ Dimensions: 7x2x7in. depth. Optional extras: 3-section chromium plated weatherproof telescopic aerials type 1, 17in./44in. 19/6. Type 2, 2in./43in. 29/6, both plus p. & p. 2/6 if purchased separately.

**THE "HIGHWAYMAN" CAR RADIO TO BUILD YOURSELF**

Similar in appearance to above but with on/off push button switch. Complete set of parts only **£7.19.6** P. & P. 5/-

**MICROPHONES**

- Acos Crystal MIC45/1 19 6
  - Acos "Stick" Microphone, Crystal MIC39-1 £1 12 6
  - DM.303 Dynamic High Impedance Desk Microphone complete with Stand. Metallic green finish 5 gns.
  - B.M.3 Quality Crystal Microphone with muting switch. Complete with lead, neck harness and removable stand adaptor £1 19 6 (matching table stand 12/6 extra).
  - DX.29 Dynamic High Impedance. Black crackle finish with Desk Stand £2 19 6
  - DM.301 Dynamic High Impedance with on/off switch. Omni-directional. Chrome plated diecast frame £4 19 6
  - DM.304 Dynamic Dual High or Low with on/off switch. Satin chrome finish £4 9 6
- P. & P. 2/6 extra on all above.

**TRANSISTORISED SOUND MIXER**

Mixing 4 channels from high impedance source giving professional results, inputs for high impedance Microphone, Tuner, Gram and/or Tape Recorder, 9 v. battery operation. Compact and beautifully styled, size 6x2 1/2x2 1/2in. Standard jack socket inputs. Price 55/-, P. & P. 2/6. Complete with PP3 9 v. battery, circuit diagram and instructions. **STEREO VERSION** available. Price 72/6. P. & P. 2/6.

**STERN**

**GREAT BRITAIN'S GREATEST**

**STERN-CLYNE HI-FI EQUIPMENT**

Ready built or Kits of Parts

	Complete Kit of parts	Ready built and tested	Carr. and Ins.	Instruction book available separately
Stern Mono-Gram Amplifier, 3 watts	£4 10 0	£6 0 0	3/6	2/6
Mullard 2-valve Audio Pre-amplifier	£6 6 0	£9 10 0	5/-	2/-
Mullard 3-valve Audio Pre-amplifier	£10 0 0	£13 13 0	5/-	3/6
Mullard "3-3" Amplifier with Passive Control Unit Model 33/RC. 3 watts	£8 8 0	£11 10 0	6/6	2/-
Mullard "5-10" Main Amplifier, Model 510/M. 10 watts	£10 0 0	£13 10 0	6/6	2/-
Mullard "5-10" Amplifier with Passive Control Unit. 10 watts	£12 0 0	£16 0 0	7/6	2/-
Stern JL10 Double Feature Pre-amplifier for Audio and Tape	£13 13 0	£19 19 0	5/-	5/-
Stern JL10 Main Amplifier Mono. 10 watts	£10 0 0	£13 13 0	8/6	3/-
The above two items purchased together	£23 13 0	£32 10 0	10/-	—
Stern Twin Three Stereo Amplifier. 3 watts per channel	—	£9 0 0	5/-	—
Stern Twin Three Stereo Amplifier in Portable Case with Two Speakers and Leads	—	£16 10 0	10/-	—
Mullard "10+10" Stereo Amplifier. 10 watts per channel	£16 0 0	£20 0 0	8/6	3/-
Mullard "10+10" Stereo Amplifier with Passive Control Unit. 10 watts per channel	£20 0 0	£24 0 0	10/-	3/-
Mullard 4-channel Electronic Mixer Unit Model 2H for 2 Mics, Radio and Gram.	£8 8 0	—	5/-	2/6
Mullard 4-channel Electronic Mixer Unit Model 1L	£10 5 0	—	5/-	2/6
HF/TR3 Tape Amplifier with Power Unit.	£13 13 0	£19 0 0	7/6	3/-
Type 'C' Tape Pre-amplifier with Power Unit	£14 0 0	£19 10 0	7/6	3/6
STP-1 Tape Pre-amplifier with Power Unit Mono and Stereo	£22 0 0	£28 0 0	8/6	5/-
CR3/S Tape Recorder with Studio Deck	£33 8 0	—	15/-	3/-

INDIVIDUAL DESCRIPTIVE LEAFLETS GIVING TECHNICAL SPECIFICATIONS, DIMENSIONS, PRICES, TERMS, ETC., FREE ON REQUEST.

**TAPE EQUIPMENT AND ACCESSORIES**

- AMERICAN ACETATE TAPE**
- 5in. 600ft. Standard ... 8/6
  - 5in. 900ft. Long Play .. 10/-
  - 5 1/2in. 1,200ft. Long Play .. 12/6
- AMERICAN MYLAR TAPE**
- 3 1/2in. 600ft. Double Play 11/6
  - 7in. 1,200ft. Standard Play 12/6
  - 5in. 1,200ft. Double Play 15/-
  - 7in. 1,800ft. Long Play .. 20/-
  - 5 1/2in. 1,800ft. Double Play 22/6
  - 7in. 2,400ft. Double Play 25/-

- BEL-CLEER ACETATE TAPE**
- 5in. 600ft. Standard ... 12/6
  - 5in. 900ft. Long Play .. 15/-
  - 5 1/2in. 1,200ft. Long Play .. 18/6
  - 7in. 1,200ft. Standard .. 18/6
  - 7in. 1,800ft. Long Play .. 25/-
- Postage & Packing 1/- per Reel extra, 4 or more Reels POST FREE

Fully Automatic Tape Splicer 14/6. P. & P. 1/6.  
 Plastic Tape Spools, 2 1/2in. 1/-; 3in. 1/3; 4in. 2/-; 5in. 2/-; 5 1/2in. 2/3; 7in. 2/6.  
 Plastic Spool Containers, for spool sizes 5in. 1/6; 5 1/2in. 2/-; 7in. 2/3.  
 Any single item plus 6d. P. & P.  
 Orders over £1 POST FREE.  
**WE CARRY FULLY COMPREHENSIVE STOCKS OF TAPE RECORDERS, DECKS AND ACCESSORIES AT ALL BRANCHES OR ORDER WITH CONFIDENCE BY MAIL.**



**RECORD PLAYERS**



- Garrard SRP10 Single Player £5 9 1
- BSR UA14 Changer £5 19 6
- BSR UA15 Changer £5 19 6
- Garrard Autoslim Autochanger £6 10 0
- B.S.R. Super Slim Changer £9 19 6
- Garrard AT6 Changer £10 19 6
- Garrard AT5 LM Autochanger (3000LM) £11 11 0
- Philips AG1016 Stereo/Mono Record Player £12 12 0
- Garrard 4HF Single Player £16 17 6
- Goldring Lenco Model 88 Transcription Turntable £18 18 5
- Garrard Laboratory Type "A" Autochanger £19 15 0
- Garrard Model 301 Transcription Turntable £20 12 0

Carr. and Ins. 5/- on above.

Descriptive Leaflet including prices with alternative cartridges, dimensions, terms, etc., free on request.

**NEW LOW PRICE COMMUNICATION RECEIVERS**



MODEL HE-40. Frequency range 550 Kc/s.-30 Mc/s. in 4 bands. PRICE £19/19/-. Carr. 10/-.

MODEL HE-30. Frequency range 550 Kc/s.-30 Mc/s. in 4 bands. PRICE £34/13/-. Carr. Paid.

MODEL KT-320. Specification as HE-30 but offered as complete kit of parts. PRICE £26/5/-. Carr. Paid.

MODEL HE-80. Frequency range 540 Kc/s.-30 Mc/s. and 142-148 Mc/s. in 5 bands. PRICE £61/19/-. Carr. Paid.

MODEL HA-63. Frequency range 550 Kc/s.-31 Mc/s. in 4 bands. PRICE £25/4/-. Carr. Paid.

**STARFLITE 90 WATT TRANSMITTER**

Band coverage 80-40-20-15 and 10 Metres. PRICE £30/9/-. Carr. 15/-.

H.P. Terms available.

Send S.A.E. for fully descriptive brochure.

**TUNER UNITS**



Stern Fidelity Mk. II VHF/FM Kit of parts £10 10 0  
Built and tested £14 5 0  
Carr. & Ins. 5/-.

**ARMSTRONG**

Mono Tuner Amp. 127M £26 10 0  
Stereo Tuner Amp. 127 £37 10 0  
AM/FM Tuner 223 £28 15 0  
FM Tuner 224 £22 10 0  
Carriage and Insurance 7/6.

**JASON**


FMT1 FM Tuner. Kit of parts £6 15 0  
FMT2 FM Tuner. Kit of Parts £10 12 6  
FMT3 FM Tuner for fringe Areas:  
Kit of parts £12 5 0  
FMT4 Tuner £20 0 4  
JTV2/FM/TV Sound. Kit of parts £15 15 0  
Built and tested £21 0 0

**TRIPLETONE FM TUNER**  
Unpowered £13 19 6  
Self-powered £15 14 6  
Carriage and Insurance 5/- each.  
Descriptive Leaflets free on request.  
Please state model required.

**CLYNE**

**ELECTRONIC HOBBIES ORGANISATION**

**THE PEAK 60 60 WATT AMPLIFIER**

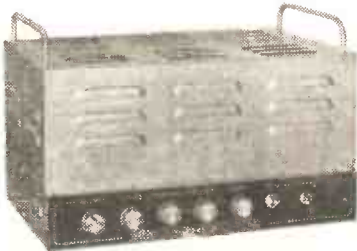

- BASS AND TREBLE CONTROLS.
- MASTER VOLUME CONTROL.
- FULL MIXING FACILITIES.
- BUILT-IN PRE-AMPLIFIER AND CONTROL UNIT.
- 60 WATT UNDISTORTED OUTPUT.
- SWITCHED OUTPUT for 3 or 15 ohms loudspeakers.
- TWO INPUTS High gain and low gain with individual volume controls.

Silver hammer finish. Black perspex front panel. Overall size 14in. x 9in. x 7 3/4in. high including cover (plus 1 1/2in. high handles).

COMPLETE KIT OF PARTS £18/18/-.

C. & I. 5/-.

ASSEMBLED AND TESTED £25/4/-.

C. & I. 5/-.

(Ventilated Cover with chrome plated handles as illustrated 35/- extra.)

**VISIT YOUR NEAREST STERN-CLYNE ELECTRONICS CENTRE**

**LONDON**

- 18, Tottenham Ct. Rd., W.1. MUSEum 5929/0095. Half Day Sat.
- 23, Tottenham Ct. Rd., W.1. MUSEum 3451/2. Half Day Thurs.
- 309, Edgware Rd., W.2. PADdington 6963. Half Day Thurs.
- 109, Fleet St., E.C.4. FLEet St. 5812/3. Half Day Sat.
- 162, Holloway Rd., N.7. NORth 7941. Half Day Thurs.
- 9, Camberwell Church St., S.E.5. RODney 2875. Half Day Thurs.

**CROYDON**

- 12, Suffolk House, George St. MUNICIPAL 3250. Half day Wed.

**BRISTOL**

- 26, Merchant Street, Bristol 1. Bristol 20261. Open 6 Days a week

**LIVERPOOL**

- 52, Lord Street. Royal 7450. Open 6 days a week

**MANCHESTER**

- 20/22 Withy Grove, Manchester 4. BLAckfriars 5379/5246. Open 6 days a week

**SHEFFIELD**

- 125, The Moor, Sheffield. Sheffield 29993

**MAIL ORDERS AND ENQUIRIES TO:**

Dept. W. W. 3-5, Eden Grove, Holloway, London, N.7. NORth 8161/5

## SPECIAL OFFERS


NO INTEREST ON 12 MONTHLY PAYMENTS



THE FULL ARMSTRONG RANGE

ARMSTRONG	Cash	Dep.	MONTHLY	
			12 pts.	18 pts.
127 Mono	£26 10 0	53/-	39/9	28/6
127 Stereo	£27 10 0	75/-	56/3	40/4
227 Mono	£26 15 0	74/-	55/1	39/4
227 Stereo	£52 15 0	106/-	79/1	56/9
<b>GARRARD</b>				
4HF/EV26A	£18 1 4	36/4	27/1	19/5
301 Strobe	£22 0 11	44/11	33/-	23/11
AT6 de Luxe	£13 15 5	26/5	20/9	14/11
Lab. A/EV26A	£20 15 2	45/2	30/10	22/1
<b>LEAK</b>				
Stereo 20/Vari.	£57 10 0	115/-	88/3	61/9
TL12 Plus Vari.	£55 15 0	72/-	53/7	38/5
Troughline 3	£31 14 6	63/6	37/7	34/1
Sandwich	£39 18 0	80/-	59/10	43/-
<b>GOLDRING Lenco</b>				
GL58	£17 1 9	35/9	25/6	18/4
GL70	£27 9 4	55/4	41/2	29/6
Goldring 88	£18 18 5	38/5	28/4	20/4
CS80	£24 17 8	49/8	37/4	26/4
<b>GOODMANS</b>				
Axiote 8	£5 5 7	10/7	7/11	5/8
Axiom 10	£6 5 11	12/11	9/5	6/9
Axiom 201	£10 17 4	21/4	16/4	11/9
Elegance II	£27 10 0	55/-	41/3	29/7
Maxim	£17 10 6	35/6	26/3	18/10
<b>WHARFEDALE</b>				
Super 8 RS/DD	£6 14 2	14/2	10/-	7/3
Gold 10 RS/DD	£7 17 5	15/5	11/10	8/6
RS/12 DD	£11 10 0	23/-	17/3	12/6
Slimline 2	£22 10 0	45/-	33/9	24/4
W3	£39 10 0	80/-	59/2	42/5
<b>QUAD</b>				
Amplifier	£22 10 0	45/-	33/9	24/4
22 Control	£25 0 0	50/-	37/6	27/2
FM Tuner	£24 18 9	49/9	37/5	26/10
AM Tuner	£28 10 0	57/-	42/9	30/8
<b>ROGERS</b>				
Cadet Stereo	£26 15 0	55/-	40/-	28/8
H385 Mk. II	£40 0 0	80/-	60/-	43/-
Var. Mk. II Tun	£24 11 8	49/8	36/10	26/5
Switched TUH	£18 10 0	37/-	27/9	19/8
<b>MISCELLANEOUS</b>				
Celestion CX1512	£11 10 0	23/-	17/3	12/5
CC 2012	£16 10 0	32/6	24/10	17/10
Decadee	£15 15 0	32/-	23/7	16/11
Dialo H55S	£30 17 11	61/11	46/4	33/3
Jordan Watt 12	£22 0 0	44/-	33/-	23/8
K.E.F. Celeste	£24 19 0	50/-	37/5	26/10
Lowther FM6	£18 18 0	38/-	28/4	20/4
SME3012/11	£26 13 9	53/9	40/-	29/8
Telehankon M55	£45 3 0	93/-	67/8	49/7
Truvor R92	£72 9 0	145/-	105/8	77/10
WB1016	£7 7 0	16/-	10/11	7/10
WB1012	£4 12 6	9/-	6/11	5/-

"THE CELESTION" fitted with the new CX1512 Celestion speaker. £28/8/-, 57/- dep. and 12 pts. of 42/5 or 18 pts. of 30/5.



"THE SLIMLINE" fitted with the Axiote. £15/15/-, 31/- dep. and 12 pts. of 23/8 or 18 pts. of 16/11. Also fitted with the Axiom 10. £17/17/-, 35/- dep. and 12 pts. of 26/9 or 18 pts. of 19/2.

These Enclosures are built to the specification of the speaker manufacturers. Supplied in Oak, Walnut or Mahogany. In teak 20/- extra. Carriage 20/-.

Showroom hours: Monday-Saturday 10 a.m. to 5 p.m. Directions: No. 6 bus from Liverpool St. Station to Odeon Hackney Road, walk back two turnings.

**A. L. STAMFORD LTD.** DEPT. K4  
98 Weymouth Terrace, London, E.2. Phone: SHO 5003

1W-145 FOR FURTHER DETAILS.

# DALY

## Electrolytic Capacitors

- \* Electronic Flash
- \* Energy Storage
- \* Motor Starters

**DALY (Condensers) LTD**  
Ealing Green · Ealing · London · W5  
EAL3127-Cables: Dalycon-London

# DALY

1W-140 FOR FURTHER DETAILS.

# BERRY'S


RADIO



THE HOUSE FOR THE BEST & NEWEST IN HI-FI, TAPE & ELECTRONIC EQUIPMENT  
25, HIGH HOLBORN, LONDON, W.C1

1W-147 FOR FURTHER DETAILS.

## Quartz Crystal Units



For ACCURACY RELIABILITY PRICE ECONOMY you can **DEPEND** on

**THE QUARTZ CRYSTAL CO. LTD.**

Q.C.C. Works, Wellington Crescent, New Malden, Surrey (MALden 0334 & 2988)

Write for Illustrated Brochure & Price List.

1W-148 FOR FURTHER DETAILS.

## ERSIN Multicore SOLDER

# NEW! PRINTED CIRCUIT & TRANSISTOR SOLDER



Designed specifically for Printed Circuits and High Temperature Sensitive Components. Plastic re-usable reel contains 212 feet of 60/40 High Tin Quality 22 s.w.g. ERSIN MULTICORE SOLDER with 5-cores of non-corrosive flux. Ask for Size 10.

15/- each (Subject)

\* For small users, the same specification is available on a 2/6d. reel (subject).

## Bib THE PROFESSIONAL TAPE SPLICER



All metal—beautifully plated—compact in size. Easily and permanently attached to a tape recorder. Clamps hold the magnetic or leader tapes in the precision cut channel—no damage to the edges. Right angle and oblique cutting slots.

Complete with Razor Cutter **18/6**

## Bib WIRE STRIPPER AND CUTTER



This efficient tool strips insulation, cuts wires cleanly and splits plastic twin flex. It is adjustable to most wire thicknesses.


3/6 each (Subject)

If you have any difficulty in obtaining these items they will be sent post free. (U.K. only)

**MULTICORE SOLDERS LTD.**  
HEMEL HEMPSTEAD, HERTS.  
TEL: BOXMOOR 3636


(See also advertisement on back cover)

1W-149 FOR FURTHER DETAILS.



**LAFAYETTE HA-63 COMMUNICATION RECEIVER**  
7 valves + Rectifier. 4 Bands. 550 kc/s. 31 mc/s. 'S' Meter-BFO-ANL-Bandspread Tuning 200/250 v. A.C. Brand New 25 GNS. Carr. paid.

PART EXCHANGE WELCOME



**TE-22 SINE SQUARE WAVE AUDIO GENERATORS.**  
Size: 20 c.p.s. to 200 Kc/s. Square: 20 c.p.s. to 25 Kc/s. 200/240 v. A.C. Brand new. Guaranteed. £15. Carr. 5/-.

**LAFAYETTE HE-40 COMMUNICATION RECEIVER**  
4 Bands 550 kc/s-30 mc/s. 'S' Meter-BFO-ANL-Bandspread Tuning—Built-in speaker. 200/250 v. A.C. Brand New 19 GNS. carr. 10/-.



**LAFAYETTE HE-30 RECEIVERS**  
9 valves. 550 kc/s-30 Mc/s. Semi kit form 24 GNS. Carr. paid.



**RCA AR.88 RECEIVERS**  
LF. Model 75-550 kc/s. and 1.5-30.5 mc/s. Guaranteed perfect order £35, carr. 30/-. D. Model 550 kc/s.-32 mc/s. Guaranteed As New Condition—£85. carr. 30/-.

**MODEL DA-1 AUTOMATIC ELECTRONIC KEYS**  
Fully transistorised. 230 v. A.C. or 6 or 12 volt D.C. operation. £16/10/-, carr. 4/6. Semi-Automatic Bug keys—£4/10/-, P. P. 2/6.




**MULLARD OC81**  
Two for 5/-.




**LAFAYETTE TE-20A R.F. SIGNAL GENERATOR**  
120 kc/s-300 mc/s on 6 ranges. Variable R.F. and A.F. outputs. Large clear scale. Size 7 1/2 in. x 10 1/2 in. x 4 1/2 in. 220/250 v. A.C. operation. Brand New £12/19/6. carr. 5/-.

**VOLTAGE STABILIZER TRANSFORMERS**  
Input 80-120 v. and 160-240 v. Constant output 110 v. or 240 v. 250 watts. Brand new guaranteed £10/10/-, Carr. 7/6.




**ALL NOMBREX EQUIPMENT IN STOCK**



**ERSKINE TYPE 13 DOUBLE BEAM OSCILLOSCOPES**  
Timebase 2 c/s-750 kc/s. Separate Y1 and Y2 amplifiers. Up to 5.5 mc/s. calib. at 100 kc/s. and 1 mc/s. 110/230 v. A.C. Guaranteed perfect £27/10/-, carr. 20/-.

**MARCONI TF 14G/4 STANDARD SIGNAL GENERATORS**  
85 kc/s-25 mc/s. ± 1%. Output variable from 1 uV to 1 volt. Internal sine wave modulation 400 c/s. up to 75% depth. Operation 200/250 volt A.C. Offered in really excellent condition, like new, fully tested and guaranteed £25. carr. 30/-.



**COLLARO STUDIO TAPE TRANSCRIPTORS**  
2 TRACK £10/10/- 4 TRACK £13/10/- POST PAID

**V.H.F. RECEIVERS R.1949**

Aircraft version of S.27. 3 bands covering 27-143 Mc/s. FM or AM fitted 'S' meter BFO, ANL etc. Power requirements 250 v. H.T. and 6.3 v. L.T. Supplied fully tested and checked £17/10/-, Carr. 10/-.

**RECORDING HEADS.**  
Reuter: 1/2 track, set of 2..... 19/6  
Miniflux: 1/2 track, set of 3..... 29/6  
Brdmatic: 1/2 track, set of 2..... 99/6  
POST EXTRA

**HEADSETS.** DLR5 low imp.—10/6  
RCA low imp.—15/6. Chamois padded moving coil with jack plug—22/6. Ditto with mic.—25/-. All new—Post extra



**MULTI-METERS**

Brand New—Fully Guaranteed—Lowest ever prices. Supplied with leads, batteries, instructions

**MODEL PT-34.** 1,000 O.P.V. 0/10/50/250/500/1,000 v. A.C. and D.C. 0/1/100/500 MA. D.C. 0/100 kΩ. 39/6. P. & P. 1/6.

**MODEL 500.** 30,000 o.p.v. 0/5/12.5/10/25/100/250/500/1,000 v. D.C. 0/2.5/10/25/100/250/500/1,000 v. A.C. 0/50μA/5/30/500mA. 12 amp. D.C. 0/60K/6 Meg./60. Meg Ω. £8/17/6 Post paid.

**MODEL NH-201** 30,000 O.P.V. 0/25/110/50/250/500/1,000 v. D.C. 0/10/50/250/500 v. A.C. 0/50μA/10/250 MA. 0/3K/500K/5 Meg. Ω. 99/6. P. & P. 2/6.

**MODEL IIT-2.** 20,000 O.P.V. 0/5/25/250/500/2,500 v. D.C. 0/10/50/500/1,000 v. A.C. 0/50μA/25/250 mA. D.C. 0/60K/6 Meg. Ω. 0/1-3 MFD. 82/6. P. & P. 2/6.

**MODEL 250J.** 2,000 O.P.V. 0/10/50/500/2,500 v. D.C. 0/10/50/500/2,500 v. A.C. 0/2 Meg. Ω. 0/250 mA. -20 to +36 dB. 49/6. P.P. 2/6.

**SILICON RECTIFIERS**

250 P.I.V. 750 MA..... 3/-  
400 v. P.I.V. 3 amp..... 7/6  
200 v. P.I.V. 8 amp..... 5/6  
1,000 v. P.I.V. 650 mA..... 7/6  
800 v. P.I.V. 500mA..... 5/6  
400 v. P.I.V. 500mA..... 3/6  
200 v. P.I.V. 200 mA..... 3/-  
95 v. P.I.V. 3 amp..... 5/6  
70 v. P.I.V. 1 amp..... 3/6  
150 v. P.I.V. 165mA..... 1/-  
Discounts for quantities. Post extra.

**MINE DETECTOR No. 4A**

Will detect all types of metals. Fully portable. Complete with instructions 39/6 each. Carr. 10/-. Battery 8/6 extra.

**BEST BUY!**

Send 1/- P.O. for full Catalogue and Lists. Open 9 a.m. to 6 p.m. every day Monday to Saturday. Trade supplied.

**G.W. SMITH & CO. (RADIO) LIMITED**  
Phone: GERRARD 8204/9155  
Cables: SMITHEX LESQUARE  
3-34 LISLE STREET, LONDON, W.C.2

# THE SOTONIAN TRADING CO.

## CONDENSERS

TCC "Metalpack" tubular, .1 mfd., 350 v. D.C. working	9d.
TCC "Metalpack" tubular, .05 mfd., 350 v. D.C. working	9d.
TCC "Metalpack" tubular, 1 mfd., 350 v. D.C. working	1/9
TCC "Metalpack" tubular, .25 mfd., 350 v. D.C. working	1/6
Sprague tubular, .1 mfd., 500 v. D.C. working	9d.
B.I. Cables moulded tubular, .01 mfd., 5,000 v. D.C. working	2/6
TCC tubular condensers, 75 p.f., 5,000 v. D.C. working	1/9
TCC base mounting condensers, .02 mfd., 11,000 v. D.C. working	25/-
TCC base mounting condensers, 2 mfd., 10,000 v. D.C. working	£12
TCC base mounting condensers, .1 mfd., 11,000 D.C. working	£2
Hunts moulded mica condensers, .002 mfd.	9d.
Laboratory type variable condensers, dimensions approx. 9 x 5 x 5 in., and suitable for use on transmitters, etc.	£3
Jackson Bros. single variable condenser, 132 p.f.	6/-
TCC base mounting electrolytic condensers, 2,000 mfd., 25 v. D.C. working	12/6
Westinghouse 12 v., 3 amp. metal rectifiers	12/6
Switchboard moving iron projecting type meters, A.C./D.C., 4 in. dia. approx., 0-150 v., and 10 amps.	each £1

## POTENTIOMETERS

Miniature potentiometers, carbon track, 1/2 w., semi-log, 1 meg.	2/-
Reliance 400 ohm wire wound potentiometers, 1 1/2 in. diameter, with knob	4/3
Colvern 2 ohm wire wound potentiometers	2/9
Colvern wire wound potentiometers, 20,000 ohm., pre-set type	3/-
Circular rubber covered twin leads, suitable for battery chargers, etc., 30ft. long	8/6

## TRANSFORMERS

Heavy duty unit in sealed container. Nominal input voltages, 117/234 v. Outputs 330-0-330 v., 200 m.a., 5 v., 2 amps. 6.4 v., 4 amps.	Price 35/-
Heavy duty unit, input 230 v. Outputs 4.5 v. C.T. at 6 amps., 4.5 v. C.T. at 6 amps., 4.5 v. at 20 amps., C.T.	Price £3/10
Telephone transformers, type 34.	5/-

## CHOKES

Small L.F. smoothing chokes, 50 m.a.	6/-
Small L.F. smoothing chokes, 60 m.a.	8/-
Miniature H.F. chokes.	9d.

## INDUCTANCES

Transmitter inductance units by Redifon, with 10 turns approx. 5 in. diameter, and sliding clip. Very suitable for laboratory use	£3
---	----

Postage or carriage extra. Prompt despatch.  
**Sotonian Trading Co.,**  
 53, The Avenue, Southampton. Tel. 56537.

1WV-150 FOR FURTHER DETAILS.

## AERIAL MATCHING TUNING UNITS

LATEST AMERICAN RELEASE BULK PURCHASE OF 3,000

These well-made tuning units made for the American 19TX-RX are housed in a metal case, colour green or brown, using a large precision calibrated scale, are an essential piece of equipment for the serious T.X. or R.X. operator. This unit will match an untuned wire or whip aerial to almost any short wave receiver or transmitter, exceptionally good for mobile top band use. This American version being well rated as far superior to any other. **GUARANTEED BRAND NEW**, only 20/-, post 7/6. Instructions supplied.

**U.H.F. RADIO RECEIVER R10.** Fx4840 Mc/s.—4475 Mc/s. (6.2-6.7 cms.). These recently made sets are supplied in two units.

1. Receiver. This is manual or Auto-tuned by an internal motor, using a total of 18 valves, osc. mixer CV90, IF 45 Mc/s. Aerial input via ordinary Pye coaxial plug (supplied).

2. Power unit and output stage, contains 300 V.H.T. and -50V. Bias supplies, also receiver Auto-tune supply. Both units housed in matching metal cases size 17 1/2 in. x 8 in. x 10 in. Supplied in first class order complete with circuit and connecting cable from power unit to set. Mains 230 volt input. Offered at a fraction of cost £4/10/- per unit. Carr. 10/-.

19 in. Racks. 5ft. and 6ft. high 50/- each, carr. 10/-.

**J. T. SUPPLY, 38 MEADOW LANE, LEEDS 11**

1WV-151 FOR FURTHER DETAILS.

# AEON



**DELAY CABLE, CALIBRATION AND TERMINATION SERVICE**

Using Hackethal FLEXIBLE Delax Cable

**AEON Laboratories, Beech Hill, Ridgemoor Road, Englefield Green, Egham, Surrey.** Egham 3961/4

1WV-152 FOR FURTHER DETAILS.

# BARGAINS

ALL BRAND NEW!

'COSMICAR' 1" F/1.9 TELEVISION LENSES



Superb example of Japanese Optics!

"Click" stop aperture f/1.9 to f/22. C mount fitting. Full focusing adjustment from infinity to 24 in. Fully bloomed. Suitable also for 16 mm. Movie Cameras. Stainless steel and black enamel finish. Complete with lens cap. (USUALLY £23) Now Only **£9.19.6** P. & ins. 5/6.

1" 'DALLMEYER' F/1.9 LENSES

Ideal for C.C.T.V. work and suitable for 16 mm. Cine Cameras. Fully bloomed, four-element construction, focusing from infinity to 24 in. Standard C mount thread. USUALLY £18/12/6. **GENUINE BARGAIN—ONLY 10 GNS.**



**E.M.I. 1 INCH VIDICON TUBES**

**M. GRADE**

Excellent for all Industrial, Commercial, Entertainment, Research and Experimental uses. **£9.19.6** USUALLY £15. (P. & ins. 16/-)

For all C.C.T.V. Vidicon Cameras and ideal for 'NEV' Icon, as advertised.

**C.C.T.V. SYSTEMS, RADIO MIKES, etc.** Available for Hire.

# HORNTONS ELECTRONICS

(Next to Pan American Airways)

**LOMBARD HOUSE, GT. CHARLES ST., BIRMINGHAM 3**

Tel. MID 0972 & CEN 6283

**THE MIDLANDS' LEADING VISUAL AND AUDIO COMMUNICATIONS SPECIALISTS**

AN UNREPEATABLE OPPORTUNITY FOR THE ENTHUSIAST

# CLOSED-CIRCUIT T.V. CAMERAS

Further consignment of a Manufacturers Discontinued Line **BRAND NEW AND READY ASSEMBLED** (But NOT tested)

ONLY **£25**

Post & ins. 28/-


Vidicon Tubes and 1" Lenses optional extra — (as illustrated opposite).

These are essentially 405-line 'VIDEO' Cameras, but are complete with a small external plug-in R.F. Modulation, to enable use with standard domestic type T.V. sets. Tunable channels 1-5. Band 1. 210/250v. A.C. 50/60 cycles. 16 mm. Cine Lens mount.





# mail orders



## Fold-away

LOFT LADDER

£15-15.0

Carr. Paid

Important: please state ceiling height

Standard length 8ft 3in. Aluminium alloy with plastic-covered steel rungs. Minimum opening needed 13in. x 18in. head room 13in.  
 ★ Folds into loft out of sight.  
 ★ Fitted by a handyman to any trap hatch in an hour.  
 ★ No structural alterations.

**LOUIS G. FORD LTD.,**  
 Dept. W.P., Eastbourne, Sussex.

Light but Strong



### BARGAIN CORNER

OC44-45-81 and 81D 4/- each. OC26 7/6 each. AF117 5/- each. OAB1 2/- each. ECC82 5/6 each. ECC83 5/6 each. PL84 5/6 each. PY33 10/9 each. PY81 5/6 each. PCC89 11/9 each. PCF80 10/6 each. U25 9,6 each. U26 10/6 each. 30PL13 11/9 each. 30FL1 10/6 each. 100 + 300 + 100 + 16 Mfd condensers 10/- each. 16Mfd condensers 1/6 each. 7J0076 co-ax cable 6d yard. C17AF tubes new £5/10. All prices post paid. C.W.O. Send for full lists of valves, condensers, accessories etc. to:

**S. F. KAYE & CO, 47 CHURCHILL AVE., KENTON, MIDDLESEX**

Mail Orders Only

### WELCOME LIGHT



With a **SELCON Automatic PHOTO ELECTRIC SWITCH**

Safety—Security—Convenience

Light automatically on at sundown—off at dawn. Selcon gives SOLAR-control for garage and porch lights, in shop windows, etc. 200/250 v. A.C. Comparable controls cost double. C.W.O. or details from:



49/6  
 PP.2/6

**PHOTRONIC CONTROLS LTD.,**  
 Randalls Rd., Leatherhead, Surrey

## EXPRESS MAIL ORDER

AUDIO—ART LTD.

- ★ OFFER SAME DAY SERVICE ON ALL MAKES OF HIGH FIDELITY EQUIPMENT.
- ★ GRAMOPHONE RECORDS, GUARANTEED UNPLAYED, FACTORY FRESH IN SEALED PLASTIC COVERS. POST & PACKING FREE, PRE-PAID OR C.O.D. ON RECORDS.


**1-3 SEDLEY PLACE, OXFORD STREET, W.1.**  
 TEL. MAYFAIR 0419

### The HAYDON CABINET

Size 16½" x 15" x 7½". Covered in Rexine and Vynair. Attractive modern colours. Fitted with 12" R.A. Speaker 3 or 15 ohms. Only £4 plus 7/6 post and packing.

PYE Remote T.V. Control Units. Contain 5 yards 5 way cable with octal plug, 2 silver knobs, 2 vol. controls, plastic case, small metal chassis assorted screws etc. Brand new and boxed—6/6d post free.

**BROADWAY ELECTRONICS**  
 92 MITCHAM RD., TOOTING, S.W.17  
 BA1ham 3984



The **PUNCH** you need!

### HOLE PUNCHES

Instant Type	...	...	...	6/10 ea.
3/8in. diameter	...	...	...	8/6 ea.
Screw-up Type	...	...	...	9/- ea.
15/32in. diameter	Toggle switch	...	...	9/6 ea.
1/2in.	B7G	...	...	10/2 ea.
3/4in.	B8A, B9A	...	...	10/8 ea.
1in.	...	...	...	11/8 ea.
1 1/4in.	...	...	...	13/4 ea.
1 1/2in.	Int. Octal	...	...	16/2 ea.
1 3/4in.	...	...	...	18/10 ea.
1 7/8in.	B9G	...	...	21/8 ea.
2in.	...	...	...	24/4 ea.
2 1/2in.	Meter	...	...	33/2 ea.

Complete Set £9/3/6.

No extra charge for postage and packing in the U.K.

## Oliver & Randall Ltd

Dept. 17  
 9 KELSEY PARK ROAD  
 BECKENHAM, KENT  
 Tel.: Beckenham 8262

### SELL

Your products through this feature

APPLY FOR DETAILS:

MAIL ORDER, WIRELESS WORLD,  
 DORSET HOUSE, STAMFORD STREET,  
 LONDON, S.E.1.

Tel.:—WATERloo 3333 Ext. 210

### DRY REED SWITCHES

Miniature type, rated at 10 Watts (½ Amp. Max.), 4/- each. Small bar magnets to operate switches, 2/- each. Post and packing 6d.

Descriptive leaflet available on request.

**Cockrobin Controls,**  
 36 Villiers Avenue, Surbiton, Surrey.

## GOLD ANODISED

TV or LEGS TABLE

Quality Products

Fully Low Loss Screened

OUTLET SOCKET

625 BOXES UHF

Details from

**EAST LANGASHIRE AUTOMATICS LTD.**  
 ACE WORKS, GIBBURN ROAD,  
 BARROWFORD, NELSON, LANCs.  
 Telephone: NELSON 66370

## KITS

Top Band Receiver (also Medium wave BC)  
 £10 0s. 0d.

Top Band Transmitter (8 watts)  
 £14 0s. 0d. ready soon

NOMAD Car Radio (1 watt output) £6 19s. 6d.

Also Transistors (AF from 3/6; RF from 6/-) components SAE list

Transistor power supplies from 35/-

Enquiries welcome about all types of kits, write in to:

**NORCOL LTD., 147 London Road**  
**Yorktown, Camberley, Surrey**  
 Tel.: Camberley 3743

Nicotine Free

**Farmer's**

**HONEYBLEND**

SMOKING MIXTURE

A unique blend of traditional smoking herbs with added HONEY and FRUIT JUICES. A fine smoke, Cool and Full Flavoured.

Regular smokers who know a good mix when they fill their pipe or roll a cigarette will send for a packet NOW.

TRY IT ONLY

3/8d. — 2oz.  
 7/- — 1lb.  
 POST FREE

Order now from:  
**THE FARM PRODUCE COMPANY,**  
 73 Vant Road, London, S.W.17

The Honey Smoke

Components! Components!

## NEW CATALOGUE

Our new Catalogue, price 5/-, is bigger and better than ever! On page one are 5 coupons, each worth 1/-. For each complete £1 of your order enclose a coupon and deduct 1/- from the money you send. If you buy £5 worth of components—even though spread over several years—your catalogue will have cost you nothing! Send P.O. for 6/- (5/- plus 1/- postage) right away to

## HOME RADIO LTD

Dept. WW, 187 London Rd., Mitcham, Surrey

# Z. & I. AERO SERVICES LTD.

Head Office: 44a Westbourne Grove, London, W.2

Tel.: PARK 5641/2/3

Cables: ZAERO, LONDON

A.R.B. Approved for inspection and release of electronic valves, tubes, klystrons, etc.

RETAIL BRANCH (personal callers only): 85 TOTTENHAM COURT ROAD, W.2. Tel.: LANgham 8403

Please send all enquiries, correspondence, and Mail orders to Head Office

### VARIABLE A.C. POWER SUPPLY UNIT



Portable Power Unit fitted with 1.5 amps. Variable. Transformer, switched and fused, with A.C. Voltmeter and panel indicator lamp. £7/15/-, p.p. 5/6.

### CONSTANT VOLTAGE TRANSFORMER



Input 110v. and 230v. A.C. Output 240v. A.C., stable within 1.5%. Max current 1 amp. Complete with signal lamp and on-off switch. £11/11/-, p.p. 12/6.

### TRANSISTOR TESTER MODEL AT-1



For P-N-P and N-P-N Transistors. Measures  $I_{CO}$  and diode reverse current up to  $50\mu A$  for low power transistors and up to 1mA for power transistors,  $\beta$  from 2 to 500 at 1mA for low power and 5mA for power transistors. Powered by dry cells. £9/17/6, p.p. 5/6.

### TRANSISTOR CIRCUIT COMPONENTS

- Set of three 450 kc/s. I.F. Coils ..... 10/6
- Variable Twin Gang Miniature Tuning Capacitor, two section, 4-16pF and 3-6pF, with 1-5pF trimmer, complete with Broadcast Band Oscillator Coil ..... 6/6
- Driver Transformer, impedance ratio 2:1 ..... 3/6
- Output Transformer for push-pull output, 250mW..... 3/6
- 5000 $\Omega$  Edgewise volume control with switch..... 4/9
- Packing and carriage 1/6 per item.

### POWER UNITS TYPE 234

19in. rack mounted fully smoothed and fused power supply unit for 230v. A.C. input. H.T. output variable from 180v. to 270v. at 80mA by means of primary taps accessible from the front panel. L.T. output 6.3v. A.C. at 4 amps. Second hand, tested, in good condition. £3/10/-, p.p. 15/-.

### E.H.T. POWER SUPPLY UNIT TYPE 45

Input: 200-250 v.A.C. through primary taps. Output: 1200v. D.C. at 200mA, fully smoothed. Rectification by full wave metal rectifiers. On-off relays. Dimensions: 7in. x 9in. x 19in. Weight 112lb. PRICE, tested and guaranteed, £18, p.p. £1/10/-.

### THOMSON VARLEY POTENTIAL DIVIDERS

Iron-Inductive 4-decade potential divider with total resistance of 70,000 $\Omega$ . Maximum input voltage 300 v. Built-in galvanometer  $1\mu A$ . F.S.D. £45.


### VARIABLE AUTO-TRANSFORMERS

Input Voltage 230v. A.C.; output variable from 0 to 200v. Type B1, 2.5 amps. £5/19/6, p.p. 7/6.

Type B2, 5 amps. £9, p.p. 10/-.  
Type B20, 20 amps. £32/10/-, p.p. 15/-.



TYPE SB10—illustrated above, 10 amps, with protecting fuse. £18/5/-, p.p. 12/6.

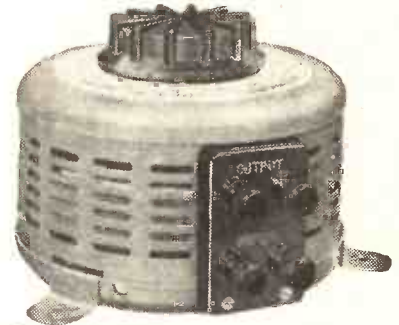

### CT53 SIGNAL GENERATORS

Frequency range 8.9-300 mc/s. Indirect calibration. Accuracy  $\pm 1\%$ . Output  $1\mu V$  to 100mV. Internal squarewave and sine-wave modulation. Power supplies 110v. and 230v. A.C. We have a small quantity of these available in good working order, checked with calibration charts, at a special price of £20, p.p. 17/6.

### MULLARD PRECISION MEASURING OSCILLOSCOPE TYPE LI40/3

Sensitivity 4.5 mV. to 45 mV./cm. in ten steps. Rise Time  $.05\mu s$  to  $.06\mu s$ ; Frequency response D.C. to 10 m.c. max. Sweep duration  $5\mu s$ . to 160 m.c. Time measurement for 0-5  $\mu s$  to 0-150 m/sec. with an accuracy of  $\pm 3\%$ . Large illuminated scales for Voltage and Time measurements. Switchable delay of  $.9\mu s$ /sec. 5-in. flat face C.R.T. with P.D.A. Power supplies and oscilloscope section are housed in two separate units, thus ensuring more flexible combination and easier handling. Power supplies required 20/250V. A.C. PRICE, brand new and guaranteed, £125. Packing and carriage £3.

### POST OFFICE TYPE ELECTRO-MAGNETIC COUNTERS

4-digit non-cancelling type Standard,  $1\frac{1}{2} \times 1\frac{1}{2} \times 5$ in., 2,300 $\Omega$  coil, secondhand ..... 5/-  
Miniature  $1 \times 1 \times 3\frac{1}{2}$ in., available in 600 $\Omega$  and 2,300 $\Omega$  coils. Secondhand ..... 6/6  
Miniature  $1 \times 1 \times 3\frac{1}{2}$ in., 4.1 $\Omega$  coil, 6 v. operation, new ..... 8/6

### MULLARD TYPE LI41 PRECISION PULSE GENERATORS

Precision double pulse generator providing 'A' pulse with a fixed delay of  $1\mu s$  on triggering pulse; 'B' pulse with a delay on 'A' pulse variable from 0 to 100 millisees, with amplitude of both pulses variable from 300 $\mu V$  to 100V in 11 ranges; 'C' pulse for triggering and synchronizing of an amplitude of 10V and  $2\mu V$  duration, and 6V triggering pulse with  $2\mu s$  width. Duration of 'A' and 'B' pulses is 5-1-2-5-10-20-50-100 $\mu V$  and rise time varies from  $.08\mu s$  to  $.5\mu s$  depending on amplitude. Pulse repetition rate is variable from 1 c/s. to 100 kc/s. PRICE, new and guaranteed £225, packing, carriage £2/10/-.

### MARCONI TF455D/1 WAVE ANALYSER

Mains operated instrument for direct measurements of components of complex waveforms in the frequency range of 20-16,000 c/s. and in the voltage range 100 $\mu V$ . to 100 v. Frequency measurements accuracy  $\pm 2\%$ . Distortion measurements within  $\pm 5\%$  to  $\pm 10\%$  accuracy. When lower accuracy and introduction of slight distortion are permissible, voltage range can be extended to 30 $\mu V$ . to 300 v. The instrument will also measure distortion in the A.F. modulating component of Low and Medium frequency carriers. Price, fully overhauled and guaranteed £150. Post and packing £2.

### VARIABLE A.F. ATTENUATORS

Unbalanced "pi" type 600 $\Omega$  Attenuator switches consisting of 21-step stud switch and wire wound resistances. Switch provides 5 time impedance steps of 4dB and intermediate 1 dB steps, giving the overall range of 0 to 20 dB at 1 dB steps. Panel mounting, fully screened,  $\frac{1}{2}$ in. spindle. Barrel dimensions 2 $\frac{1}{2}$ in. dia. x  $3\frac{1}{2}$ in. long. 10/- p.p. 2/-.

### 3-CENTIMETER ECHO BOX TYPE 100

The Echo Box (Resonator) consists of a high "Q" resonant cavity adjustable over a frequency range of 9170 to 9445 mc/s, directly calibrated in mc/s, and a calibrated piston attenuator coupled direct to the cavity. A crystal detector coupled to the cavity detects the resonance and the crystal current deflects the tuning meter. For connecting to the directional coupler, a lossy coaxial cable is provided, having a socket at one end and a waveguide-to-coaxial transformer at the other.

PRICE, unused, and fully guaranteed..... £32 0 0  
Packing and carriage ..... £0 15 0

### HETERODYNE CRYSTAL CONTROLLED V.H.F. FREQUENCY METER TYPE 183

Frequency range 20 to 300 mc/s with accuracy of  $\pm 0.02\%$  and 5.0 to 6.25 mc/s. 10 to 12.5 mc/s, and 15-18.75 mc/s. Internal crystal 100 kc/s  $\pm .005\%$ . Beat indication by magic eye or headphones. Long linear scales directly calibrated to mc/s. Range can be extended to 1000 mc/s. by using harmonic, with accuracy reduced to  $\pm 3\%$ . PRICE, new and guaranteed..... £85 0 0

### R.F.T. TYPE FIZ-2 FREQUENCY INDICATOR

Portable Mains operated Frequency Indicator for direct measurements of frequencies from 10 c/s. to 100 kc/s. The range is covered in 8 bands, the lowest being 30 c/s. F.S.D. Measurement accuracy  $\pm 3\%$  F.S.D. Input Impedance 100 k $\Omega$ . The instrument is provided with internal source of highly stable frequency for checking and recalibration of the scale. PRICE, new £20/0/0. Packing and carriage 16/-.

### TYPE MR65 'JENNEN' MOVING COIL METERS

Square flange  $3\frac{1}{2}$ in., flush mounted, 2.6in. dia. body. Accuracy 2.5%. Available in the following calibration: 1, 5, 10mA and 100v. D.C. PRICE £2/6 ea. p.p. 4/-.

### MARCONI TF338B VARIABLE ATTENUATOR

Characteristic impedance 600 $\Omega$ . Internal/external termination. Range 0 to 105 dB obtainable by means of slidewire attenuator 0-25 dB and 4 steps of 20 dB each. Frequency response 0 to 105 dB within .2 dB. Maximum input 2 watts. £20.

### R.P.M. INDICATOR KIT

Radio-Altimeter Indicators with moving coil movement of 5 mA. F.S.D. easily convertible to accurate engine R.P.M. indicators. Supplied complete with parts required for conversion, and detailed instructions. Suitable for 4-cylinder engines with 12 v. electrical installation. 35/-, P.P. 5/-.

### CATHODE RAY TUBES

3DPIA	15/-	88D	40/-	DF13/2	120/-
3FP7	12/-	89A	60/-	VCR97	40/-
3FP2	100/-	408A	60/-	VCR138	50/-
5FP1	12/6	ACR13	60/-	VCR139A	25/-
5CP1	30/-	09D	80/-	VCR171B	40/-
5UP7	60/-	DG13/2	80/-	VCR522	50/-
7BP7	20/-	DG13/34	220/-		

**MULLARD**

OC26	2/-	OC71	5/-	OC170	8/-
OC28	17/6	OC72	8/-	OC171	8/-
OC35	15/-	OC73	6/-	OC204	10/6
OC42	8/-	OC76	6/-	AF114	9/-
OC44	6/-	OC78	7/-	AF116	8/-
OC45	6/-	OC75D	7/-	AF117	8/-
OC70	5/-	OC139	12/-	AF118	20/6

Set of two matched OC81 and one OC81D ..... 12/6  
 G.E.C.  
 GET115 7/-; GET116 7/-; GET573 20/- each; 35/- pair.  
 R.C.A.  
 2N410 (OC45) 3/6; 2N412 (OC44) 3/6; Set of two 2N410  
 and one 2N412 8/-.

**LOW POWER ZENNER DIODES**

0A2202	(5.6 ± 5%)	200 mW	6/-
0A2203	(6.2 ± 5%)	200 mW	6/-
0A2204	(6.8 ± 5%)	200 mW	6/6
KS44B	(12.0 ± 10%)	300 mW	6/-

**SILICON JUNCTION RECTIFIERS**

BY100	700 p.i.v., 450 mA. D.C.	7/-
0A210	400 p.i.v., 500 mA. D.C.	6/6
0A211	800 p.i.v., 500 mA. D.C.	7/6
DD058	800 p.i.v., 500 mA. D.C., sub-miniature	12/6
BY210	800 p.i.v., 6 amps. D.C., stud mounted	7/6

**SEMICONDUCTOR DIODES**

CS8A	10/-	OAS1	2/-	SX641	3/-
CG10E	1/6	OAS8	3/-	SX642	3/6
GEK23	1/6	OAS6	3/6	SX643	15/-
OA79	2/3	OAS25	5/-	SX781	4/6

**MAGNETRONS**

539E	£5	CV1495	£8	JP9-7D	£12/10
725A	£3	CV1496	£8	JP9-50	£15
558E	£50	CV1497	£8	JP9-250	£35
6510	£25	CV1498	£8	JTP-61	£80
CV160	£5	CV1499	£8	M602A	£35
CV370	£12/10	CV1500	£8	QK338	£60
CV1494	£8	CV5117	£10		

**KLYSTRONS**

2K25	£4	5650	£8	CV2242	£40
2K26	£15	6721	£50	CV6002	£40
2K28	£9	4116	£30	K302	£12
K33	£470	6470	£75	K308	£12/10
2K41	£20	CV35	£5	K312	£210
2K45	£7	CV36	£6	K320	£200
417A	£2	CV67	£5	K335	£10
707B	£3	CV129	£24	VA290E	£35
723A/B	£3	CV238	£5	VA247C/H/K	£20
729A	£4	CV216	£10		

**2.25 W. ZENNER DIODES**

4.25 v. (VR425); 4.75 v. (VR475); 5.25 v. (VR 625); 5.75 v. (VR675); 7.0 v. (VR7B); 9.0 v. (VR 9B).  
 All at 6/6.

**FULLY GUARANTEED**

0A4	6/-	6Z3	6/-	6F7	5/-	9BW6	7/-	19BG6G	7/-
0A4G	17/6	5Z4GT	6/-	6F8G	5/-	9B5	7/-	19E2	25/-
0B2	6/-	6Z0L2	10/-	6F11	6/-	10C1	10/-	19G3	20/-
0B3	6/-	6A3	8/-	6F13	6/6	10C2	12/-	19G6	15/-
0C3	6/-	6A6	4/-	6F17	6/-	10D1	7/-	20A2	20/-
0D3	5/-	6A7	10/-	6F23	9/6	10F1	14/-	20D4	9/-
0E4	5/-	6A8	8/-	6F24	11/-	10F3	8/-	20F2	15/-
1A3	5/-	6A8A	6/6	6F27	10/-	10F9	20/1	20L1	14/-
1A5GT	5/-	6A8T	4/-	6F32	3/-	10F18	10/-	20P1	14/-
1A7GT	8/-	6A7C	3/-	6F37	6/-	10L1	7/6	20P3	12/-
1A7D	7/-	6AP4	11/-	6F23	9/6	10L1D110	7/6	20P4	14/-
1B3GT	7/-	6AG5	2/6	6F24	11/-	10P3	8/-	20P5	12/-
1B4	30/-	6AG6	12/6	6F27	10/-	10P9	20/1	20A6G	5/-
1B4A	60/-	6AG7	2/6	6F32	3/-	10Y15	25/6	25LGT	5/-
1D56P	8/-	6AH6	10/-	6F33	6/-	10L1	7/6	25Z4G	7/-
1D6	8/-	6AJ5	9/-	6GGG	2/6	10L1D110	7/6	25Z5	7/6
1G8GT	7/-	6AK5	5/6	6H1	7/-	10P13	12/6	31A2	45/-
1H4G	7/-	6AK5W	8/-	6G6	1/6	10P14	13/-	30P3	12/-
1H5GT	7/-	6AK6	7/-	6J4	9/-	10Y15	25/6	30S	30/-
1L4	2/6	6AK7	6/-	6J6G	4/-	11D3	7/-	809	40/-
1L6	17/-	6AL5	3/-	6J6	3/6	11D5	7/-	801	20/-
1N5GT	8/-	6AM5	2/6	6J6W	6/-	11E2	15/-	802	20/-
1Q5GT	8/-	6AM6	4/-	6J7	9/-	12A6	10/-	812A	45/-
1R4	5/-	6AR6	7/-	6J7G	5/-	12A6G	5/-	814	20/-
1R5	6/-	6AQ5	6/-	6J7GT	5/-	12A8GT	5/-	815	40/-
1S4	5/-	6AN5	10/-	6K7	5/-	12AC6	8/-	820	20/-
1S5	4/6	6AQ5	6/-	6K7G	2/-	12AH7GT	2/-	832A	45/-
1T4	3/-	6AQ6	8/-	6K7GT	5/-	30C15	10/-	860	25/-
1T5GT	7/-	6AR5	6/-	6K8	8/-	30C17	12/-	6694	35/-
1U4	5/-	6AR6	6/-	6K8G	4/-	30C18	10/5	666A	14/-
1U5	6/-	6AR8	17/6	6K8GT	5/-	30F3	9/-	884	15/-
1V	5/-	6AS6	5/-	6L6GA	7/6	30FL1	12/-	931A	60/-
1X2A	7/-	6ASTG	22/6	6L7	5/-	30L17	13/-	954	5/-
1X2B	7/-	6AT6	4/-	6L18	8/-	30P12	10/-	955	3/-
2A3	30/-	6AV6	6/-	6P1	11/-	12AUV	5/-	956	2/-
2A4G	6/-	6AV6	6/-	6P1	11/-	30P11	10/5	957	5/-
2C26	3/-	6AX5GT	6/-	6Q7G	6/-	32	6/-	958	4/-
2C34	4/-			6R7	6/-	35A5	11/-	959	8/-
2C40	70/-	6B7	5/-	68A7	8/-	35C5	6/6	982	12/-
2C42	25/-	6B8	5/-	68G7	8/-	35LGT	7/-	122	12/-
2C46	30/-	6B8G	2/6	68H7	7/-	36ZGT	6/-	1625	6/-
2C51	12/-	6BA6	4/-	68J7	8/-	12B4A	9/-	1626	3/-
2C62	12/-	6BC4	17/6	68K7	5/-	12B6	3/-	1635	12/-
2CW4	12/-	6BE6	5/-	68LGT	5/-	35Z4G	4/-	2050	12/6
2D21	6/-	6BF6	6/-	68N7GT	4/6	12C8	4/-	2051	7/6
2E24	40/-	6BH6	7/-	68P7	8/-	12C8A	6/-	36ZGT	6/-
2E29	30/-	6BJ6	8/-	68R7	5/-	12C9	8/-	38	5/-
2G21	12/-	6BJ7	7/-	6U4GT	10/6	12E3	3/-	42A2A	30/-
2X2	3/-	6BK4	20/-	6U3	8/-	12F5GT	3/-	42	5/-
3A4	4/-	6BK7A	8/-	6UT7	7/-	12G5WGT	3/-	45A6	12/-
3A5	7/-	6BL7GT	9/-	6U8	7/6	12H7GT	7/6	50B5	7/-
3B7	5/-	6ON6	7/-	6V6	9/-	12K7GT	7/-	50C6G	6/-
3B2	30/-	6BQ7A	8/-	6V6G	5/-	12K8	8/-	50D6G	6/-
3B2A	5/-	6BR7	11/6	6V6GT	7/6	12K8A	7/-	50LGT	6/6
3B24W	12/-	6BR8	5/-	6X4	4/-	12K8C	4/-	53KU	9/-
3C45	30/-	6B87	16/-	6X6GT	5/6	12K8C7	4/-	55B1	5/6
3CK100A	100/-	6B8W	9/-	6Y6G	6/-	12S7	7/6	56A4	2/-
3D6	4/-	6C4	2/6	6Z4	5/-	12SFGT	7/-	56B3	7/-
3E29	60/-	6C5GT	6/-	7B6	11/-	5M5G	4/-	5665	200/-
3Q1	6/6	6C6	4/-	7B7	8/-	12H7	4/-	5670	10/-
3QGT	6/6	6C8G	7/-	7B8	8/-	12H7	4/-	5672	7/-
3R4	5/-	6C21	100/-	7C6	7/-	12K7	5/-	5676	10/-
3V4	5/6	6C31	12/-	7C7	5/-	12K7	5/-	5683	8/-
4CX250B	6C8B	5/-	7D3	8/-	12L7GT	7/6	5687	25/-	
4D1	200/-	6C6GA	7D3	8/-	12N7GT	7/6	5691	25/-	
4PR60A	6C8G	6/-	7E5	7/-	12S7	7/6	5698	20/-	
4THA	240/-	6CL6	9/-	7E6	4/-	12S7	7/6	5698	20/-
5C22	120/-	6D3	7/6	7E7	10/-	12S7	7/6	5698	20/-
5R4GY	6/6	6D4	15/-	7E8	8/6	12Y4	2/6	5698	20/-
6R4WGA	6D6	3/-	7I7	4/-	13D1	5/-	225DU	10/-	
			6DK6	9/-	13D3	6/-	262B	30/-	
6T4	8/-	6D8A	15/-	7R7	12/-	13E1	190/-	31C3	30/-
6U4G	5/-	6E5	7/-	787	16/-	14E6	6/-	416B	200/-
6U46B	6/6	6E6	12/-	774	7/-	14Q7	10/-	417A	60/-
6V4	8/-	6E8	8/-	774	9/-	13E	9/-	351A	10/-
5Y3GT	5/-	6F6G	8/-	8D2	3/6	19AQ5	5/-	705A	10/-

**AELEX BRAND**

715A	30/-	5945	30/-	AC6/PEN	6/-
715B	60/-	5952	20/-	ACT6 170/-	6/-
717A	4/-	5881	17/6	ACT5 200/-	6/-
721B	25/-	5994	100/-	ACT25	500/-
801A	6/-	5949	400/-	AE211A	240/-
803	30/-	5963	10/-	AR8	6/-
804	70/-	5965	5/-	AR8	240/-
805	30/-	5993	12/-	ARP3	3/6
807	9/-	5998	15/-	ARP12	3/6
809	40/-	6005	7/6	ATP4	5/-
811	20/-	6021	12/-	AW6	5/-
812A	45/-	6058	7/6	AZ1	9/-
814	20/-	6059	17/-	AZ12	9/-
815	40/-	6061	12/-	AZ12	9/-
820	20/-	6064	8/-	AZ41	6/6
832A	45/-	6073	7/6	B65	4/6
888	12/-	6080	25/-	BD75	45/-
890	10/-	6094	35/-	DL63	30/-
866A	14/-	6098	12/-	DL63	30/-
884	15/-	6100	10/-	B84A	30/-
931A	60/-	6101	7/-	B810A	400/-
954	5/-	6111	15/-	BT5	50/-
955	3/-	6130	30/-	BT9A	60/-
956	2/-	6135	10/-	BT19	20/-
957	5/-	6136	10/-	BT45	200/-
958	4/-	6140	30/-	BT79	30/-
959	8/-	6146	27/6	BT83	60/-
982	12/-	6147	17/-	C1K	5/-
1025	6/-	6159	32/-	C1K	40/-
1626	3/-	6186	10/-	C1A	80/-
1635	12/-	6188	10/-	C1B	15/-
2050	12/6	6202	8/-	CL33	9/-
2051	7/6	6205	10/-	CY31	6/6
36ZGT	6/-	6211	4/6	D1	3/-
38	5/-	6263	70/-	DA30	10/-
42A2A	30/-	6280	200/-	DA41	40/-
42	5/-	6282	4/-	DA50	50/-
45A6	12/-	6442	100/-	DAC32	7/-
50B5	7/-	6451	50/-	DAF70	7/-
50C6G	6/-	6463	7/-	DAF92	6/-
50D6G	6/-	6476	20/6	DAPM6	6/-
50LGT	6/6	6621	70/-	DC70	8/-
53KU	9/-	6621	70/-	DC70	8/-
55B1	5/6	6751	30/-	DC90	7/-
56A4	2/-	6785	22/6	DE75	10/-
56B3	7/-	6813A	25/-	DET12	40/-
5665	200/-	6820	12/6	DET18	40/-
5670	10/-	6901	4/-	DET24	70/-
5672	7/-	6903	5/6	DET25	15/-
5676	10/-	9004	2/6	DF38	8/-
5683	8/-	9006	2/6	DF66	6/-
5687	25/-	A239	12/6	DF91	3/-
5691	25/-	A1834	22/6	DF92	2/6
5698	20/-	A2134	8/-	DF96	6/-
5698	20/-	A2226	18/-	AC1H/1D	8/-
5698	20/-	A2983	15/6	DK32	8/-
5698	20/-	150B2	12/-	DK40	10/-
5698	20/-	150B3	8/-	DK91	5/-

INCREASE YOUR INCOME  
WIDEN YOUR KNOWLEDGE  
MAKE NEW FRIENDS  
JOIN THE

# ARMY EMERGENCY RESERVE

R.E.M.E.

## WIRELESS AND TELECOMMUNICATIONS MECHANICS

with or without previous military service are required as volunteers to train for 15 days in the summer on modern equipments. Generous pay and bounties.

For details write:

**HQ AER, REME, BROXHEAD HOUSE, Bordon, Hants.**

## COME INTO COMPUTERS FOR A GOOD NEW YEAR

vacancies exist in our

### FIELD ENGINEERING SERVICES

**SITE COMPUTER ENGINEERS** are needed to maintain computers on sites in the London area and in other parts of the country. No travelling is involved and a special allowance is paid to those who work in or near London.

**COMPUTER COMMISSIONING ENGINEERS** are needed for the final testing and installation of computers. The work would be based on Kidsgrove in North Staffordshire but periods away from base would be necessary. Generous allowances would be paid. Kidsgrove is well placed on the border between Cheshire and Staffordshire; housing in the area is inexpensive and easy to find.

**COMMISSIONING ENGINEERS** for Industrial Data Processing Equipment are needed. The work would be partly at the factory at Kidsgrove and partly installation at sites. Varied and interesting work.

**MAINTENANCE DEVELOPMENT ENGINEERS** are needed at Kidsgrove and in N.W. London for development

work in the maintenance and modification of computers. A **TECHNICAL WRITER** is also needed for this work.

These posts offer good training, attractive allowances, excellent prospects, staff status and voluntary participation in a good pension scheme. Essential qualifications are keenness, willingness to take responsibility, electrical or electronic experience and general intelligence. Experience with transistors and pulse circuitry would be an advantage. The suggested age range is 25 to 35 but others would be considered.

Interviews will be held in London, Bristol, Kidsgrove and at other places by arrangement. Please write giving brief details of age, qualifications, experience and location preferences to:—

**The Technical Staff Officer,  
Dept. W.W./L.36,  
English Electric-Leo-Marconi Computers Ltd.,  
Kidsgrove, Stoke-on-Trent.**

**ENGLISH ELECTRIC LEO MARCONI**



# CLASSIFIED ADVERTISEMENTS

**DISPLAYED:** £5 per single col. inch.

**LINE advertisements (run-on):** 5/6 per line (approx. 7 words), minimum two lines. Where an advertisement includes a box number (count as 2 words) there is an additional charge of 1/-.

**SERIES DISCOUNT:** 15% is allowed on orders for twelve monthly insertions provided a contract is placed in advance.

**BOX NUMBERS:** Replies should be addressed to the Box number in the advertisement, c/o Wireless World, Dorset House, Stamford Street, London, S.E.1.

No responsibility accepted for errors.

Advertisements accepted up to 15th JANUARY for the FEBRUARY issue.

## SITUATIONS VACANT

### RADIO SPECIALISTS.

REQUIRED by the GOVERNMENT OF THE REPUBLIC OF ZAMBIA for service as Chief Inspectors and Senior Inspectors of Police on contract for one tour of 36 months in first instance. Salary according to age and experience in scales ranging from £1,540 to £1,780 a year. Gratuity at rate of 25% of total emoluments. Liberal leave on full salary. Accommodation, with heavy furniture, provided at reasonable rental. Educational Allowances. Plain clothes allowance. CANDIDATES must have had experience in the installation and maintenance of modern low and medium power H.F. equipment, single and independent side band equipment and of V.H.F. equipment including multiplex mks. A knowledge of the maintenance of teletypewriters and diesel and petrol generators up to 10 KVA would be desirable.

APPLY to Crown Agents, M. Dept., 4 Millbank, London, S.W.1, for application form and further particulars, stating age, name, brief details of qualifications and experience, and quoting reference M2E/62257/WF. [1086]

### ELECTRICAL TESTER.

EXPERIENCED man required for calibrating measuring instruments and testing Audio Equipment.

PLEASE write to:—  
R. A. HARNETT, Personnel Officer, Rank Audio Visual Division, Woodger Road, Shepherds Bush, W.12. [1082]

### ELECTRONICS TECHNICIAN.

IMPERIAL College, London.

SENIOR Technician/Technician wanted for interesting and varied duties in construction and maintenance of electronics equipment. Wide range of practical experience desirable. Salary scales: Senior Technician £810-£1,010; Technician £580-£815, with London weighting up to £45 according to age, plus specific qualifications award of £30-£50.

Applications in writing with full details to Professor G. R. Hall, Department of Chemical Engineering and Chemical Technology, Imperial College, London, S.W.7. [1094]

### UNIVERSITY OF SOUTHAMPTON

APPLICATIONS are invited for several posts of technicians in the electronics department; the work involves the manufacture (mainly of a one-off nature) and servicing of electronic equipment; possession of other laboratory skills would be an asset; generous holidays, pleasant working conditions; salary £580 to £815 p.a. depending on experience with supplementary allowances for suitable qualifications; applicants should give details of experience, present occupation, age and the names and addresses of two persons to whom references may be made. [1056]

### CIVILIAN INSTRUCTORS GRADE III.

NINE posts for men fully experienced in the maintenance of radio and/or terminal channelling equipment (including ancillary equipment such as DC Telegraph Machines and Telephone Exchanges) to teach Royal Signals technicians and trainees. Possession of appropriate O.N.C., C. & G. Certificate or equivalent qualifications desirable. Selection by written examination and interview.

STARTING salary £785 (at age 21)—£1,096 (at age 30 or over) rising to £1,181.

PROSPECTS of pensionable appointment and promotion.

OPPORTUNITIES exist for further technical study and Day Release will be granted where possible.

ACCOMMODATION can be provided for single and for unaccompanied married men on a temporary basis.

WRITE for application form to C.P.O., Ferome Lines, Catterick Camp, Yorkshire. Closing date, 31st December, 1964. [1060]

### EXECUTIVE ENGINEERS, POST OFFICE.

TWELVE pensionable posts in London and Provinces for mechanical, electrical and electronic engineers to develop and design communications systems and postal service equipment.

QUALIFICATIONS: Degree or Dip. Tech. in engineering or physics or, exceptionally, very high professional attainment. Final year students may apply.

SALARY (Inner London): £850-£1,748. Promotion prospects.

AGE: At least 21 and normally under 35 on 31st December of the year in which application is made. Some extensions for service in H.M. Forces or Overseas Civil Service.—Write (preferably by postcard) to Civil Service Commission, Savile Row, London, W.1, quoting S/322(15). [1085]

## MECHANICAL ELECTRICAL ELECTRONIC INSPECTORS/EXAMINERS

## MINISTRY of AVIATION

Skilled men required as Inspectors and Examiners of a wide range of equipment for the Armed Forces. There are vacancies (1) at Contractors' works in: LONDON and THE HOME COUNTIES and many other provincial locations in ENGLAND and WALES. (2) In laboratories at:—BROMLEY (KENT) and HAREFIELD (MIDDX.) and WOOLWICH.

### ELECTRICAL INSPECTION DIRECTORATE

Is responsible for the inspection of RADIO, RADAR, NAVIGATIONAL and similar ELECTRONIC/ELECTRICAL equipment and components.

### AERONAUTICAL INSPECTION DIRECTORATE

Is responsible for the inspection of AIRCRAFT, ENGINES, GUIDED WEAPONS and associated equipment.

**QUALIFICATIONS** To have served a recognised apprenticeship or have equivalent experience or training.

**PAY (London Area)** £16.0.0 rising by annual increments of 10/- to £17.10.0.

(Provincial) £15.10.0 to £17.0.0 for a 42-hour (5 day) week.

**HOLIDAYS** Two weeks (84 hrs.) rising to three weeks (126 hrs.) after five years' service in the grade—8½ days public holidays in addition.

**PROSPECTS** Excellent prospects for promotion to the Technical Class within a salary scale £913-£1,244 for suitable candidates who possess or obtain the necessary qualifications.

**OTHER INFORMATION** After serving a qualifying period there is a paid sick leave scheme in operation.

**APPLICATION** To be made in writing giving:—

- (a) Brief details of apprenticeship and/or experience.
- (b) Whether E.I.D. or A.I.D. is preferred and for what type of work.
- (c) Location(s) preferred, stating alternatives, if possible.

**MINISTRY OF AVIATION, E.I.D. (A.O./P.2)**  
"AQUILA", GOLF ROAD, BROMLEY, KENT.



## TELECOMMUNICATIONS

G.E.C. (Telecommunications) Ltd. manufacture a wide range of equipment from audio line repeaters to complete micro-wave transmission systems. We require the following staff:—

### TEST DEPARTMENT

Vacancies exist in the Test Department for work on the above systems and associated test equipment. Men are required with some years experience of electronic equipment preferably combined with a formal qualification. Recent experience gained in the Services is valuable. Starting salaries are from £15 though some vacancies exist at a lower level

### CONTRACT ENGINEERS

These vacancies would be particularly attractive to men who have had wide experience of the installation and commissioning of telecommunications systems and who are now seeking static employment. Starting salary not less than £1,100.

### ELECTRONIC DESIGN ENGINEERS

The job involves the production of manufacturing drawings from laboratory schematic sketches. A formal qualification together with a mechanical as well as an electronic bent and draughting experience are required. Starting salaries are in the bracket of £15-£18 for those with an appropriate City and Guilds final or O.N.C. and higher for those with H.N.C. or similar qualifications or experience.

### SYSTEMS PLANNING ENGINEERS

We require qualified engineers who have had experience of planning large scale transmission systems preferably with overseas telephone Companies. Specialised knowledge of line and/or radio systems is essential.

### INSTALLATION ENGINEERS

We would like to see men with several years experience of electronic or communications equipment who are prepared to travel extensively in the U.K. the activities of the Installation Department are world-wide and opportunities for overseas travel will arise. Applications from artificers, technicians and fitters completing regular engagements with the Services are most welcome. Salaries are in the range £18-£21 a week and higher for experienced engineers

#### APPLY:

With concise details to:—

The Staff Officer,

**G.E.C. (TELECOMMUNICATIONS) LTD.**

Coventry

## MINISTRY OF DEFENCE (Air Force Department)

have vacancies for

### Civilian Radio Technicians

at R.A.F. Sealand, Cheshire; R.A.F. Cosford, Staffordshire; and other R.A.F. stations throughout the United Kingdom for the servicing, repair, modification, and testing of air and ground radio and radar equipment. Commencing salary according to age is £722 to £929 p.a., max. salary £1,067 p.a. Houses may be available for renting at West Kirby some 15 miles from Sealand.

Apply to **Ministry of Defence (CE3h (Air)), Sentinel House, Southampton Row, W.C.1, or to any Employment Exchange.**

## COLLEGE TECHNICIAN

required for

### EAST BERKS COLLEGE

For work in the Electrical Laboratories and Workshops: some knowledge of domestic radio and T.V. equipment necessary. Salary within the scale £590—£805 depending upon experience and qualifications. Apply to the Principal, East Berks College, Boyn Hill Avenue, Maidenhead.

100% TRANSISTORS  
OC44/45, 81, 81D, 2/9 each  
BY100 5/- each

AF117 3/6 each OC26 7/6 each

J. ROBINSON RADIO TV,  
4 HIGHCLIFFE ROAD  
BLACKLEY MANCHESTER 9

## Ministry of Defence (Air Force Department)

have vacancies for

### CIVILIAN RADIO TECHNICIANS

at R.A.F. Sealand, Cheshire; R.A.F. Cosford, Staffordshire; and other R.A.F. stations throughout the United Kingdom for the servicing, repair, modification, and testing of air and ground radio and radar equipment. Commencing salary according to age is £722 to £929 p.a., max. salary £1,067 p.a. Houses may be available for renting at West Kirby some 15 miles from Sealand. Apply to **Ministry of Defence (CE3h (Air)), Sentinel House, Southampton Row, W.C.1, or to any Employment Exchange.**

## AN OVERSEAS CAREER WITH

### INTERNATIONAL AERADIO LIMITED

TO meet the requirements of constant growth and expansion we invite applications from technicians and engineers for an overseas career in North, West and East Africa, the Mediterranean area, the Caribbean, the Arabian Gulf and the Far East. If you have recently completed service in a trade such as Ground Wireless Fitter in the R.A.F. or Radio Electrical Artificer in the Royal Navy or have other experience in the maintenance of HF and VHF communications, RTT and navigational aids, we should be interested to hear from you. Successful candidates would normally spend six weeks at our Radio Training School, Southall, Middlesex, before proceeding overseas, but in some cases staff with suitable qualifications and experience may be offered immediate posting. Overseas staff receive a tax-free salary with married and child allowances if appropriate and accommodation, bachelors or married, is provided free; other benefits include generous U.K. leave and membership of an excellent pension and life assurance scheme.

WRITTEN applications, please, to Personnel Officer, 40, Park St., W.1. [1084]

TV service engineer required, good pay, 5-day week, 5 weeks' holiday with pay.—Singer's Radio, Ltd., 261, Harrow Rd., London, W.2. Cunningham 0707. [10271]

RADIO Engineer, preferably A.M.I.E.R.E., required for specialised research into miniature F.M. receivers.—Details of qualifications and experience to Box WW 1057, Wireless World.

AIRCRAFT Radio Technicians and Electrical Mechanics with workshop experience required to overhaul aircraft radio electronics and electrical equipment; good rates of pay, superannuation, free insurance, generous sick pay and holidays.—Apply: Skyways Engineering, Limited, Stansted Airport, Stansted, Essex. [11072]

TELEVISION development engineer, E. K. Cole Limited, Southend-on-Sea, have a vacancy in their television development laboratories for a young man who has had practical training and has reached H.N.C. or Final City & Guilds in radio and television servicing.—Write stating age and experience to Personnel Manager. [1095]

**BRITISH AIRCRAFT CORPORATION**

**PACEMAKERS  
IN  
AVIATION  
PROGRESS**



require at Stevenage, Herts, a  
**TECHNICAL INSTRUCTOR**  
for  
**SERVICE DEPARTMENT TRAINING  
SCHOOL**

Applications are invited for the above post which entails the planning, preparation, lecturing and demonstration of the operation, performance and maintenance aspects of complex equipment. The techniques involved range over radar, computing, servo-mechanisms and electro-mechanical, digital, and analogue systems.

Candidates will require academic knowledge to at least H.N.C. standard and obviously must either have previous experience in instructing or the ability to express themselves confidently, together with the desire to teach and appreciate the needs of students.

Experience with the Technical Branches of the Service or in the design, development or testing in some of the above techniques is necessary.

The Service Department Training School is responsible for customer training for both military and civil customers and provides the opportunity for service both at home and abroad.

Assistance may be available with the cost of relocation.

*Please apply in writing giving full details of age, experience and quoting reference PDS/WW to:—*

**Senior Personnel Officer,  
British Aircraft Corporation,  
Stevenage, Herts.**

**BRITISH AIRCRAFT CORPORATION**

# SINCLAIR RADIONICS LTD.

have an  
unusual opening  
for an  
electronics  
engineer

**IN THEIR NEW CENTRAL  
LONDON LABORATORY**

The man we require will be highly creative, preferably with experience in television and certainly with considerable knowledge of semi-conductor circuitry. He will lead the laboratory team and work in close co-operation with the Company's managing director. The successful applicant will have had at least five years' experience in the field and will be a man to whom the prospect of working with a young, virile team will prove stimulating. A very good salary with generous profit-sharing scheme is offered.

*Details in confidence please to the Managing Director at the address below.*

**sinclair**

**SINCLAIR RADIONICS LIMITED  
22 DUNCAN TERRACE, LONDON, N.1**

## DIGITAL COMPUTERS

The Decca Navigator Co. Ltd. require the services of Senior Electronic Engineers for development work in their Omni-Track Computer Laboratory. Experience of Digital Circuits essential, qualifications to degree or H.N.C. standard would be an advantage. These positions carry attractive salaries and conditions of employment, and offer scope for advancement with an expanding Company famous throughout the world. Please apply either in writing, in person or 'phone for application form to the Personnel Officer,

The Decca Navigator Co. Ltd.,  
247 Burlington Road,  
New Malden, Surrey,  
MALden 2271.  
Quote Ref. SEE/JA.

## TELEVISION SERVICE ENGINEERS

Scottish Area.

- ★ Good basic wage plus
- ★ Merit pay
- ★ Paid overtime
- ★ Sickness Benefit and Super-annuation
- ★ Good prospects

Vacancies exist in Stirling (bench work only), Kilmarnock, Edinburgh, Perth, Glasgow, East Kilbride, Falkirk. Clean driving licence essential. All interviews arranged locally. Ex-Service Radar Fitters particularly invited to reply.

### RENTASET LIMITED

Apply: Area Engineer, Rentaset Limited, Spring Kerse, Kerse Road, Stirling. Tel.: Stirling 2893/4.



## TEST ENGINEERS

With a view to Company expansion, applications are invited from Test Engineers who wish to be engaged in testing a wide range of valve and semi-conductor industrial control equipment, including digital systems. A working knowledge of electrical/electronic circuitry is essential.

These are interesting permanent staff situations with a well established Organisation in the industrial electronics field.

The salary paid will be commensurate with ability and experience.

Apply in confidence, in writing or by appointment, to:—

**Personnel Manager,**  
**LANCASHIRE DYNAMO ELECTRONIC PRODUCTS LTD.,**  
RUGELEY, Staffs. Telephone No: Rugeley 371  
(A Member of the Metal Industries Group of Companies)

MINISTRY OF DEFENCE (Air Force Department) requires Examiners (Technical Class Grade III) in the Radio division of the Aeronautical Inspection Service.

DUTIES.—At Henlow the calibration of a wide range of electronic equipment and the compilation of calibration manuals. At other units, the technical supervision of staff, the inspection and testing of equipment and submission of inspection schedules.

LOCATION.—Vacancies exist mainly at Henlow, Western and Northern England, S. Wales and N. Ireland. QUALIFICATIONS.—Applicants must be British subjects. A full five-year apprenticeship or equivalent training. Experience in the development, manufacture, inspection, maintenance or testing of wireless or radar equipment. O.N.C. (Elect.) or City and Guilds Intermediate Certificate plus Radio II or an equivalent qualification. Applicants must be prepared to serve a tour or tours of 2 or 3 years' duration overseas.

APPOINTMENTS will be unestablished. Establishment is by open competitions which are held periodically.

SALARY.—National Scale £798-£1,091. Age 28 and over start at £975. Prospects of promotion to higher grades with a maximum of £1,767. Applications and further details from Ministry of Defence C.E.3f(Air), Sentinel House, Southampton Row, W.C.1. [1087]

SERVICE Engineers required for an exciting new range of electronic instruments about to go on the market. Applicants should have had experience of electronic instruments and of repair or servicing. Good salary and pension are offered.—Write to Sales Director, Vickers Instruments Ltd., Haxby Road, York, stating age and details of previous experience. [39]



PYE TELECOMMUNICATIONS LTD

Have vacancies in  
CAMBRIDGE

## VHF ENGINEERS

Experience of V.H.F. Transmitters and Receivers essential. Men who have had training in the Services would be suitable. Good rates of pay and promotion. Applicants who wish to seek a career with Europe's leading Radiotelephone manufacturers should apply to:—

Personnel Manager  
Pye Telecommunications Limited,  
Newmarket Road,  
Cambridge.

Tel: Teversham 3131



OF  
CAMBRIDGE

We require trained men for production testing, fault finding and inspection of Modern equipment.

- \*SINGLE sideband equipment
- \*VHF radiotelephone equipment
- \*HI-FI reproduction equipment

We have limited vacancies for more senior and experienced technicians with drive, who can lead small teams.

There are also vacancies for men with less experience who can be trained for such work.

Apply to: The Personnel Manager,  
Cambridge Works Limited,  
Haig Road, Cambridge.



# Mechanical Engineer

Rank Cintel require a Mechanical Engineer to work on the mechanical development of the following:—

- 35 mm. and 16 mm. Teleciné Equipment.
- Video Tape Recorders.
- Tape Transport Mechanisms
- Slide Change Mechanisms.

Salary up to £2,200 p.a.


The Engineer appointed should have several years' experience in the conception and design of small precision mechanisms. Preference will be given to anyone with experience of film or tape traction, and a background knowledge of optics and/or servo controls would be advantageous.

We want first-rate people, and will offer first-rate salaries, pension, non-contributory life and Accident cover and comprehensive fringe benefits.

If you are interested in joining a lively organisation in attractive surroundings, and would welcome the opportunity of rapid promotion as your Department expands, please write, quoting reference below, giving full details of age, qualifications and present salary to:—

THE GENERAL PERSONNEL MANAGER (Ref. ME/WW)  
**RANK-BUSH MURPHY LIMITED,**  
 BESSEMER ROAD, WELWYN GARDEN CITY, HERTFORDSHIRE.

## THE RANK ORGANISATION LIMITED



### HAMMER FINISH PAINT

The modern finish for electronics.

Can be brushed or sprayed. Blue or Silver.  
 2½ oz. tins 3s. 6d., ½ pint 7s. 6d., 1 pint 15s.  
 Post 6d. on any order. Trade supplied.

**FINNIGAN SPECIALITY PAINTS, (W),**  
 Mickley Square, Stocksfield, Northumberland

1 W W—155 FOR FURTHER DETAILS.

### PROFESSIONAL ENGINEERS AND TECHNICIANS

with at least two years' experience in British Industry are invited to avail themselves of our Confidential and Free Service.

E.A.L. offers the most efficient and satisfactory way of obtaining alternative employment in the Electronics Industry.

E.A.L. is in contact with all firms in S.E. England and undertakes a complete and thorough survey of any area for suitable vacancies for every engineer registered with us.

For further information please phone or write to:



Electronics  
**Appointments Ltd.,**  
 22 Gloucester Mans.,  
 Cambridge Circus,  
 London, W.C.2  
 Phone: TEMple Bar  
 5557/8

**TEST engineers.**—Applications are invited from test engineers with previous industrial experience of testing radio communications, receivers and transmitters; successful applicants will be offered positions on the company's permanent staff; starting salaries commensurate with qualifications and experience.—Apply in writing, giving full details, to Personnel Officer, Redifon, Ltd., Bromhill Rd., S.W.18. [0252

### DINSDALE AMPLIFIER

PRINTED CIRCUITS and parts available for Mono and Stereo units. Also Prints and all parts for "W.W." P.M. TUNER including R.F. Assembly. An alternative variable tuned version is now available at a total building cost of £11 including ready-wound coils for easy assembly.

Please send for Lists.

**HART ELECTRONICS**  
 193 Hart Road, Manchester, 14.

1 W W—156 FOR FURTHER DETAILS.

**QUEEN MARY COLLEGE** (University of London), Mile End Road, E.1.  
**NUCLEAR ENGINEERING LABORATORY.**  
**CHIEF TECHNICIAN.**—A Chief Technician is required to help in developing equipment and to supervise the laboratory staff of about 12. Administrative experience in a laboratory, adaptability and enthusiasm are more important than paper qualifications or specialized experience. Experience in electronics would be an advantage. The work of the department includes electronics, reactor technology and precision mechanical engineering. A well equipped electronics workshop and machine shop are available. Pension scheme, five-day week, four/five weeks annual leave. Appointment according to ability, etc., on scale £1,085×35 to £1,255 and in special cases to £1,445 p.a. Letters only to the Registrar (NCT) stating age and giving full details of experience and present work. [1084

### UNIVERSITY COLLEGE OF WALES, ABERYST-WYTH.

APPLICATIONS are invited for the following posts on a research project in the Department of Physics.

(i) **SENIOR TECHNICIAN.** The work on Upper Atmosphere Research calls for sound practical knowledge of electronics and involves in the main the building and testing of H.F. pulse and C.W. transmitters and receivers.

(ii) **JUNIOR TECHNICIAN.** Who could well be a recent school-leaver with "A" or "O" level Physics and two other "O" level passes required to assist the Senior Technician.

**SALARIES.** Senior Technician, £810-£1,010. Junior Technician, £280-£500.

**APPLICATIONS,** with the names of two referees, should be sent to the Registrar as soon as possible. [1088

# SENIOR ENGINEERS

# ENGINEERS

Continued expansion has created a number of vacancies in our Marine Systems Division for able and creative engineers to join teams currently designing and developing complex electronic and electro-mechanical equipment for oceanographic and similar applications. These offer excellent opportunities to engineers who:

- ★ Would like a career where ability is recognised and rapid promotion is encouraged.
- ★ Like to blend theory with practice.
- ★ Can offer novel solutions to unusual problems.
- ★ Are prepared to accept responsibility.
- ★ Like to partake in the trials associated with the equipment they have developed.

If you are interested in these opportunities and would like to join us in developing equipment required to utilise the vast resources of the oceans, apply: The Employment Manager, Plessey-UK Limited, Ilford, Essex

**Plessey UK**

**ELECTRONIC TESTERS.**

SEVERAL vacancies exist for Testers familiar with Television circuitry for work on Industrial Television Cameras, TV Monitors, etc. Good salary, station transport.—Apply Personnel Officer, Peto Scott Electrical Instruments Ltd., Addlestone Rd., Weybridge. Tel. Wey. 45511. [1081]

**RADIO & Television Testers.**

FOR City Factory; good rates up to 7/6 per hour; five-day week. APPLY to Personnel Manager:—ALBA (RADIO & TELEVISION), Ltd., Tabernacle St., London, E.C.2. [105]

**TECHNICAL TRADING CO.**  
11/12 NORTH RD., BRIGHTON  
TEL: 67999

**VALVES**—All items as advertised in the May issue still available.  
Other Retail Shops:- 72 East Street, Southampton & 350 Fratton Road, Portsmouth

**240<sup>WATT</sup> ELECTRIC POWER ANYWHERE**

**ANYTIME! from 12<sup>VOLT</sup> CAR BATTERY**



1W-157 FOR FURTHER DETAILS

## VACANCIES IN THE COMPOSITE SIGNALS ORGANISATION

A number of vacancies offering good career prospects, exist for

### RADIO OPERATORS (Male)

Candidates should have a minimum of two years' practical Radio Operating experience.

Write, giving details of Education and Qualifications to:—

Recruitment Officer (CSO/3),  
Government Communications Headquarters, A Block,  
Priors Road, Cheltenham, Glos.

**LONDON UNIVERSITY, INSTITUTE OF PSYCHIATRY.**  
DENMARK Hill, London, S.E.5, Specialist Technician (Senior Grade) in electronics required to assist in the design, construction and maintenance of research apparatus in the Department of Psychology under the direction of the Professor. Work involves the instrumentation of most forms of behavioural investigation and therapy and the ability to translate ideas into "hardware", is called for. Salary scale is that of Whitley Council, Senior Technicians' Grade 1, i.e., £884 to £1,147 per annum (including London Weighting) application forms from the Secretary, Institute of Psychiatry, The Maudsley Hospital, Denmark Hill, London, S.E.5. (Ref. P.) [1089]

**PYE CAMBRIDGE WORKS, Ltd., Haig Rd., Cambridge.**  
\* SINGLE sideband equipment.  
\* VHF radiotelephone equipment.  
\* HI-FI reproduction equipment.  
WE require trained personnel for production testing and fault finding of modern equipment.  
WE have limited vacancies for more senior and experienced men with drive, who can lead small teams engaged on this work.  
WE have also limited vacancies for persons of less experience who can be trained for such work.  
APPLY to: The Personnel Manager. [0340]

**BOOKS, INSTRUCTIONS, ETC.**

**WEBB'S** log books for recording signals heard and worked, 112 pages, 9 1/4 x 5 1/2 in., approved format, semi-stiff covers, excellent value 7/6 post free, or callers 6/5.—Webb's Radio, 14, Soho St., London, W.1. [103]

## TRAIN TODAY FOR TOMORROW

Start training TODAY for one of the many first-class posts open to technically qualified men in the Radio and Electronics industry. ICS provide specialized training courses in all branches of Radio, Television and Electronics—one of these courses will help YOU to get a higher paid job. Why not fill in the coupon below and find out how?

**Courses include:**

- RADIO/TV ENG. & SERVICING
- AUDIO FREQUENCY
- COLOUR TELEVISION
- ELECTRONICS—many new courses
- ELECTRONIC MAINTENANCE
- INSTRUMENTATION AND SERVOMECHANISMS
- COMPUTERS
- PRACTICAL RADIO (with kits)
- NEW PROGRAMMED COURSE ON ELECTRONIC FUNDAMENTALS

**Guaranteed Coaching for:**

- Inst. Electronic & Radio Eng.
- C. & G. Telecom. Techns' Certs.
- C. & G. Supplementary Studies
- R.T.E.B. Radio/T.V. Servicing Cert.
- Radio Amateurs' Examination
- P.M.G. Certs. in Radiotelegraphy

Start today - The ICS Way  
**INTERNATIONAL CORRESPONDENCE SCHOOLS**

Dept. 230, Parkgate Rd., London S.W.11.

Please send FREE book on

Name.....  
Address.....  
..... 1.65

Member of Association of British Correspondence Colleges

# CHALLENGING OPPORTUNITIES IN CANADA EARN \$7,500 IN ELECTRONICS

RADIO AND ELECTRONICS TECHNICIANS with a desire to see more of the world can find rich rewards with the CANADIAN MARCONI COMPANY. The company, CANADA'S LARGEST ELECTRONICS SPECIALISTS, is engaged on important defence projects in remote areas of Canada.

Successful applicants will enjoy a remarkably low cost of living (food and accommodation for the employee only costs \$1.50 a day, heavy duty clothing is supplied free) and will have a chance of a lifetime to accrue substantial savings. There are also first class prospects for promotion to supervisory grades with salary ranges up to \$10,500.

Can you QUALIFY? If you have three or more years' experience in installation or maintenance of communications type equipment with special emphasis on radio relay, carrier and data transmission systems (City and Guilds or Higher National is also desirable) the answer is YES. Or if you have extensive practical experience then the answer, again, may be YES.

Please write with full details, quoting reference WW2990E, to:  
**TECHNICAL STAFF OFFICER, GROUP PERSONNEL SERVICES  
ENGLISH ELECTRIC HOUSE, STRAND, LONDON W.C.2**



MANUALS, circuits of all British ex-W.D. 1939-45 wireless equipment and instruments, from original R.E.M.E. instructions; s.a.e. for list, over 70 types.—W. H. Bailey, 167a, Moffat Rd., Thornton Heath, Surrey. [1095]

### ARTICLES FOR SALE

#### CLEARING STOCK

ELECTRICAL, electronic, radio, tools, television, radar, office, test and miscellaneous equipment, components and appliances; s.a.e. 6d. list; everything must go, consider offers/exchanges, w.h.v.?—Albatross Engineering Co., Dept. WW5412, 78-80, High St., Gosberton, Spalding, Lincs. [142]

PERSPEX and p.v.c. sheet, all types supplied and moulded to customers' instructions.—Joyce Electrics, 36, Bathford Hill, Bath. [1090]

BRAUN portable wireless, battery operated; £2.—Apply S.A.V., 33, Gayshan Ave., Gantshill, Ilford, Essex. [1000]

SEE page 124 for valves, loft ladders, hi-fi equipment, etc. If you want to take advantage of the mail order feature ring Wat. 3337, Ext. 210, now!

WIRELESS WORLD bound 1933-1937, unbound June, 1948 to June, 1962, will deliver in London area: offers.—Box W.W. 1085, Wireless World.

AVO valve characteristic meter with miniature adaptors and manuals, in perfect working order, £20 o.n.o.—Robertsons, 200, High St., Beckenham SE94. [1080]

AVO electronic testmeter, £30; Taylor multimeter 100A, £20; Airnee, Televet 877, £50; and Radiovet 211, £35 or £60 for both; Advance signal gen. Type E, £10; ex-Govt. signal gen., £1/10; Wee Megger, 500V boxed, £10; all good condition.—Box WW1097, Wireless World.

E.M.I. Closed Circuit TV Mk. 6, 625 lines, comprising 14in. monitor, 2 minicameras 5in. dia., 500 feet 7/8in. dia. 25-way cable for remote control of one camera, Vidicon tube, Taylor Hobson Vidital lens, 12mm T.1.5, camera control unit, pre-amp., all necessary cables: can be seen working; total cost £1,200; best offer over £685.—Box WW 1092, Wireless World.

IMPORTED privately from U.S.A. 1962, condition as new, National HRO 60 Communications Receiver general coverage 1.7 to 30 megacycles, bandspread all amateur bands and 50 to 54 mc/s on HRO standard plug in coil units. Six position selectivity crystal filter, ten bands and bandspread accurately calibrated, built in power unit 200-250V 50 cps, complete with handbook and L.S. monitor if required. Best offer above £250 secures.—Box W.W. 1091, Wireless World.

### ARTICLES WANTED

WANTED: Radio-Frequency Impedance Bridge, general radio type 1606-A or similar.—Write Cooper, 68, Chapel St., Marlow, Bucks. [43]

£10 reward for information leading to purchase of £5 to 10 KW transmitter, "medium wave."—Box WW 45, Wireless World.

WANTED, rotary converters, 28 volt I/P, 540 volt at 45mA O/P, or similar. Up to 100 off required.—Box WW 40, Wireless World.

REQUIRED, 4 only Redifon HF radio telephones as new condition, type GR 400, 60 watt S.S.B., power supply AC 200-250 volts, 50/60 cycles with alternative DC power unit, 12 volt positive/floating earth, operate frequencies of 3590 Kc/s and 3870 Kc/s.—Reply: Tenant Trading Limited, 9, Harp Lane, Gt. Tower St., E.C.3. [1096]

### TAPE RECORDING ETC.

SAVE on cost of hi-fi. See Audio Supply notice (advert. No. 0132). [0142]

SAVE on cost of hi-fi. See Audio Supply notice (advert. No. 111). [109]

FERROGRAPH 5/AN, very little use; £65.—Box WW 110, Wireless World, London. [109]

FERROGRAPH 5/AN, almost new, £70; (London demonstration).—Box WW 5318, Wireless World.

"SLEEP learning," the book essential for all go-ahead people.—Send 6/6 to York House, Huddersfield. [133]

### FOR ALL YOUR PANEL WORK WRITE FOR ILLUSTRATED BROCHURE OF PARALEX & LUFBRA ADJUSTABLE HOLECUTTERS

WITH MORSE TAPER SHANK UP TO NO. 4 OR STRAIGHT SHANK  $\frac{3}{8}$  DIA. TO  $\frac{1}{2}$  DIA.

HOLES ACCURATELY BORED FROM 1in. DIA. TO 12 $\frac{1}{2}$ in. DIA.

AKURATE ENGINEERING Co. Ltd.  
CROSS LANE, LONDON, N.8  
TEL. FITZROY 2670

1WV-158 FOR FURTHER DETAILS.

### RESISTANCE WIRES EUREKA-CONSTANTAN Most Gauges Available

NICKEL-CHROME MANGANIN  
NICKEL-SILVER

### COPPER WIRE

ENAMELLED, TINNED, LITZ,  
COTTON AND SILK COVERED

SMALL ORDERS PROMPTLY DESPATCHED  
B.A. SCREWS, NUTS, WASHERS  
soldering tags, eyelets, and rivets  
EBONITE and BAKELITE PANELS.

TUFNOL ROD, PAXOLIN TYPE COIL  
FORMERS AND TUBES, ALL DIAMETERS;  
SEND STAMP FOR LIST. TRADE SUPPLIED.

### POST RADIO SUPPLIES

33 Bourne Gardens, London, E.4  
Phone: Clissold 4688

1WV-159 FOR FURTHER DETAILS.



## MULLARD LIMITED

### Central Application Laboratory

## MITCHAM

We invite applications from suitably qualified and experienced men for the following vacancies:—

### ENGINEERS FOR TELEVISION (Ref: ET)

To join a Group engaged on semi-conductor design for both colour and black and white television. Applicants should also be of H.N.C. level or have had extensive experience in this type of work. An interest in television receiver circuitry is essential.

### ENGINEERS FOR DEFLECTION AND DISPLAY (Ref: ED)

To join a Group which specifies and investigates the application of new display developments for television and other display devices. Semi conductor design experience, an interest in associated circuitry is desirable. Applicants should be of at least O.N.C. level.

### ENGINEERS FOR TELECOMMUNICATIONS

To join a Group working on the application of valves and semi conductors to telecommunication equipment, experience of H.F. design together with at least an H.N.C. in Electrical Engineering is essential. For one of these vacancies a knowledge of varactor diodes is essential. (Ref: TEL.)

### ENGINEERS FOR EQUIPMENT GROUP

a) A Project Leader is required to be responsible to the Leader of a group whose work includes the design and construction of test equipment, calibration and maintenance, prototype wiring and electrical and acoustical measurements. For this vacancy applicants must have H.N.C. together with experience of electrical design and construction. (Ref: EE/PL.)

b) A Junior Electrical Engineer is required to assist with the design, construction and calibration of test equipment, and to carry out electrical and acoustical measurements. For this particular vacancy practical experience may be of more value than formal technical qualifications. (Ref: EE/JE.)

Applicants please write quoting appropriate reference to:

The Personnel Officer

## THE MULLARD RADIO VALVE CO.

Mullard Ltd.  
New Road, Mitcham Junction, Surrey

TELEFUNKEN M24. professional. 209gns new. will take 165gns; Ampex 971 stereo. 226gns new. will take 135gns; Reflectograph "A." 105gns new. will take 75gns.—Hamilton Electronics, 35, London Rd., Southampton. Tel. 28622. [1076]

A UNIQUE Buy! Recording tape, top brand, 7in. 2,400ft D.P.; 25/-; 5 1/2in 1,200ft. 19/6; p. & p. 1/6 per spool; bargains in all sizes; s.a.e. for list; we repair, buy and sell recorders.—E. C. Kingsley & Co. Ltd., 132, Tottenham Court Rd., London, W.1. Euston 6500. [113]

### TECHNICAL PUBLICATIONS

#### A circuit draughtsman/illustrator

is required to assist with the preparation of instruction handbooks for Medical X-ray Equipment. His duties will include the layout of schematic circuit diagrams to BSS 108 and 530, the production of simple line and tone drawings and assistance with author research. Experience of photo-retouching would be useful but is not essential.

Applicants should write giving fullest personal particulars including experience and existing salary, age, etc., to  
Personnel Manager,  
G.E.C. (ELECTRONICS) LTD.,  
East Lane, Wembley, Middx.

#### Electronics Service Engineer

required for London Office of well known Company manufacturing electronic desk calculating machines. This is a Senior appointment for a Service Engineer with a sound knowledge of basic electronics and experience in Electronics, Radar, Radio and Television or similar field. The position is permanent and pensionable. Comprehensive training, on full pay, will be given to successful applicant. Please send resume of technical training and experience to:

G.S.M., Sumlock Comptometer Ltd.,  
The Island, Uxbridge, Middlesex.

### FANTASTIC TAPE OFFER (G'tneed)

STD.	L.P.	D.P.	Empty Spools
3in. 175ft. 2/6	225ft. 3/6	300ft. 4/6	1/-
6in. 600ft. 6/-	900ft. 8/9	1,200ft. 13/3	2/-
3 1/2in. 900ft. 6/9	1,200ft. 10/9	1,800ft. 18/-	2/3
7in. 1,300ft. 8/6	1,800ft. 14/-	2,400ft. 23/-	2/6

POST FREE

S.A.E. for lists of I/P and D/P tapes.  
**A. MARSHALL & SON**  
28 Cricklewood Bdy., London, N.W.2.  
Telephone: GLA 0161/2

MEASURE HIGH VOLTAGES • 3 to  
with EASE, ACCURACY and SAFETY • 30  
with the Pocket Size **KILOVOLTER** • kV

Ideal for checking TV, Radar, Car Ignition, etc. Only 97/6d. Trade discount 15%.  
Or ask for leaflet. **WAVEFORMS LTD.**  
72 Vauxhall Bridge Road, London, S.W.1.  
Phone: VICTORIA 3404-9

TAPE/DISC/TAPE transfer editing; duplicating; if quality and durability matter (especially with LPs from your precious tapes) consult Britain's oldest transfer service.—Fund raising records published for schools, musical societies (tax free).—Sound News Productions, 10, Clifford St., London, W.1. Reg. 2745. [108]

### TEST EQUIPMENT — SURPLUS AND SECONDHAND

X BAND signal generators, TS-45/APM3, brand new, £10, carriage 10/-; Marconi valve voltmeters, £5/10; s.a.e. for list of microwave and test equipment.—Worthing Radio, 245, South Farm Rd., Worthing, Sussex. [41]

### NEW GRAM AND SOUND EQUIPMENT

GLASGOW.—Recorders bought, sold, exchanged; cameras, etc., exchanged for recorders or vice-versa.—Victor Morris, 343, Argyle St., Glasgow, C.2. [120]

JOIN Audio Supply Service and save on cost of hi-fi, 7/6 p.a., 60-page photographically illustrated (non advert.) hi-fi catalogue, 4/6, export enquiries welcome.—10, Clifford St., London, W.1. [0132]

RETURN of post service; record changers, players and tape decks, some at special prices; speakers, Martin type kits, Mullard amplifier kits, Jason tuners, test meters, all in stock, H.P. available; send for free illustrated list, postal only.—Watts Radio, Ltd., 54 Church St., Uxbridge, Surrey. Tel. 47556. [114]

### THE MINISTRY OF DEFENCE

#### (ARMY DEPARTMENT)

invites applications for interesting Grade V Engineering appointments in the **BRITISH FORCES BROADCASTING SERVICE** overseas in Aden, Benghazi, Tobruk, Tripoli and Cyprus.

#### DUTIES AND QUALIFICATIONS

Operation and maintenance of MF, HF, VHF Transmitters, Studio Equipment and generating equipment. Appropriate ONC, City and Guilds, or equivalent qualifications are necessary.

**SALARY SCALE** (under review) for Grade V staff is £739 to £1,039 p.a. In addition generous non-taxable Foreign Service Allowances are paid according to location. Candidates must be at least 21 years of age.

For further details and Application Form please write to:

**The Director (EW),  
British Forces Broadcasting Service,**

**Kings Buildings,  
Dean Stanley Street,  
London, S.W.1.**



**You are interested  
in Radio and  
T.V.—Why not—  
PUT SOME LETTERS  
AFTER YOUR NAME**

You can rapidly qualify in your spare time by means of an absorbingly interesting Chambers Postal Course. We offer expert and highly personal training backed by a "SATISFACTION - OR - MONEY - BACK" Guarantee. Over 75 years' experience . . . thousands of successes.

**FREE 100-PAGE GUIDE**

Choose from hundreds of Courses — Practical Radio (apparatus supplied), Radio & T.V. Servicing, Applied Electronics, P.M.G. Cert., City & Guilds, R.T.E.B., A.M.I.E.R.E., Radio Amateurs Exam etc. Send today for the informative 100-Page *Chambers Guide To Success* — FREE. (Please state Career, exam or subject of interest).

**Chambers  
College**

(Dept. 11) 148 Holborn, London, E.C.1.  
1W-162 FOR FURTHER DETAILS.

**T**APE recorders and decks by Ferragraph, Brenell, Truvox, Vortexion, Telefunken.  
**TUNERS** and amplifiers by Quad, Leak, Rogers, Chapman.  
**MICROPHONES** and stands by AKG, Resio, STC, etc.  
**THE** fabulous Microkit condenser mic., highest professional performance, kit 20gns; complete ready to use 25gns.  
**ALL** tapes and accessories.  
**RAPID** postal service anywhere in world; good quality part exchanges welcome: h.p. facilities; specialist audio service dept., records, all labels—Parasat service.  
**LAMBDA RECORD CO.**, 95, Liverpool Rd., Liverpool 23. Tel. Great Crosby 4012. [2868]  
**JOIN** Audio Supply Service and save on cost of hi-fi. 7/6 p.a. 60-name photographically illustrated (non-advert.) hi-fi catalogues, 4/6, export enquiries welcome.—10, Clifford St., London, W.1. [111]

**NEW COMPONENTS**

**I**NE O.P. transformers and scan coils for most makes. Exact replacements from 25/- used and 50/- new send s.a.e. for imm. quote, add 3/6 for p. & p.; telephone orders sent same day c.o.d.; example: new LOPT's: Ekco T231/221, 65/-; Pye VT4/7, 59/6; Murphy V250/280, 65/-; Cossor 938, etc., 62/6; Ferguson 992-8, 69/6; Masteradio, 65/-; H.M.V. 1940-8, 65/-; Alba T321-4, etc., 52/6 used and 14/17 T.V.'s, callers only, £1 each.—T.C.S., Ltd., 112, Camberwell Rd., S.E.5. Tel. Rodney 7917. Open all day Saturday. [0334]

**ZONAL FILM (MAGNETIC COATINGS) LIMITED**  
(NOW A SUBSIDIARY COMPANY OF ILFORD LIMITED)  
**HOLMETHORPE AVENUE, REDHILL, SURREY**

**HAVE THE PLEASURE OF OFFERING THE FOLLOWING VACANCY—**

**V.T.R. MAINTENANCE ENGINEER**

Requires a man with at least 3 years experience with radio and television servicing or V.T.R. maintenance. Preferably with theoretical television servicing, although not essential if the practical experience of television is fairly extensive. Permanent position for successful applicant. Canteen facilities. Pension Scheme available.

Apply at once to the Personnel Manager: Write or telephone. TEL. Redhill 4706.

**B.B.C.2, TV, RADIO, TAPE REC., SPARES.**  
**B**.B.C.2/625. Complete conversion kits, or tuners and IF panels separately; send for free lists. TV Signal Booster Units, Labgear B1/3 or UHF 75/-, masthead 105/-, Perdio UHF 70/-, post free; L.O.P.'s., Philips, Stella 1768, 8617, etc. 98/-; Ekco/Ferranti U25 types 48/6, Ekco/Ferranti U26 and Perspex types 62/6, Ferguson 306, 508, 48/6, 406, etc. 65/6. Sobell, TS17 48/6, 171, etc. 67/6. Pye V4 to V700, etc. 62/6, post 3/-; also Alba, Cossor, Decca, G.E.C., K.B., Invicta, Pam, Philco, McMichael, R.G.D., Dynatron, Emerson, Regentone, Ultra, H.M.V., Marconi, etc.; Scan coils, frame O/P, Frame osc., Line osc. mains, sound O/P transformers, width/in coils, mains droppers, dual controls, etc.; Tuner Units, Fireball, incremental, turrets, channel coils: CRTS, Mullard, Mazda, Brimar, Emiscope 14in and 17in 85/-, 21in 120/-, etc., carriage 10/-; Tape Recorders, belts, heads, motors, etc.; salvaged components—large selection clean, serviceable turrets, transformers, etc., enquiries invited, C.O.D. 2/6. MANOR Supplies, 64, Golders Manor Drive, London, N.W.11. Callers, 589b, High Rd. (near Granville Rd.), N. Finchley, N.12. Hil. 9118 (day), Spe. 4032 (evg.); open all week incl. Sat. [101]

**"WIRELESS WORLD" alternative EHT unit;** s.a.e. for itemised price list, list available for all previous articles including F.M. tuner, Mullard amplifiers and capacitance meter.—Ajax Electronics, 18a, Rumbold Rd., Fulham, London, S.W.6. [47]

**VALVES**

**V**ALVE cartons by return at keen prices; send 1/- for all samples and list.—J. & A., Boxmakers, 75a, Godwin St., Bradford. 1. [116]  
**S**TUCK for a valve? Try Mazel Valve Depot, Manchester (English, American and Continental types); please note EBL31 and CBL31 out of stock; if any dealers or manufacturers can help please contact: Mazel Valve Depot, 122-138, London Rd., Manchester. 1. Tel. Ardwick 3505. [42]

**VALVES WANTED**

**W**E buy valves for cash, large or small quantities, old types or the latest; send details, quotations by return.—Waltons Wireless Stores, 15, Church St., Wolverhampton. [134]

**A**LL types of valves British or American, transmitting and receiving; keenest cash prices paid. What have you got to offer?—Write or call Lowe Bros., 95-97, Redchurch St., London, E.2. Tel. Shoreditch 4415-6. [2882]

**EXCHANGES**

**W**E purchase for spot cash, modern used hi-fi equipment, quality tape recorders, communication RXS, stereo gear, etc., etc.; call, write or telephone, best prices given.—Miller's Radio, 38a, Newport Court, few yards from Leicester Square Underground station, Ger. 4638. Est. 20 years. Buyer can collect within 100 miles radius. [0237]

**TELEVISION  
SERVICE ENGINEERS**

If your job doesn't fully satisfy you, if you can face up to the challenge of technical changes in the future, then we can offer you

★ **SECURITY**—we are expanding and are one of the largest service organizations in the country.

★ **5-DAY 40-HOUR WEEK**—our staff have excellent working conditions which are under constant review.

★ **EXTRA HOLIDAY BASED ON SERVICE.**

★ **SICKNESS BENEFIT AND SUPER-ANNUATION SCHEME IN OPERATION.**

★ **EXCELLENT WAGES PLUS**

★ **MERIT PAY, SERVICE PAY AND PAID OVERTIME.**

★ **OPPORTUNITY FOR TECHNICAL ADVANCEMENT.**

We have vacancies in MAIDSTONE, CHATHAM, BASILDON, HARLOW, NORTHAMPTON, KETERING, various parts of LONDON AND KENT.

All interviews arranged locally. Clean driving licence essential. Apply in writing to:—

**RENTASET LIMITED**

Regional Engineer, 27, Clarendon Road, Harrow, Middlesex.

**NEW BOOKS**

**INDUSTRIAL ELECTRONICS MEASUREMENT**, by A. Schure. 15/-. Postage 9d.

**INTRODUCTION TO SEMICONDUCTOR DEVICES**, by M. J. Morant. 18/-. Postage 1/-.

**INTRODUCTION TO NUMERICAL CONTROL MACHINE TOOLS**, by O. S. Puckle and J. R. Arrowsmith. 45/-. Postage 1/-.

**COLD CATHODE TUBE CIRCUIT DESIGN**, by D. M. Neale. 45/-. Postage 1/-.

**SIMPLIFIED MODERN FILTER DESIGN**, by P. R. Geffe. 50/-. Postage 1/-.

**DESIGN OF LOW-NOISE TRANSISTOR INPUT CIRCUITS**, by W. A. Rheinfelder. 30/- Postage 1/-.

**ELECTRICAL INTERFERENCE**, by R. F. Fuchli. 50/-. Postage 1/-.

**INTRODUCTION TO COUNTING TECHNIQUES AND TRANSISTOR CIRCUIT LOGIC**, by K. J. Dean. 25/-. Postage 1/-.

**ELECTRONIC PRECISION MEASUREMENT TECHNIQUES AND EXPERIMENTS**. Compiled by Staff of Philco. 78/-. Postage 2/-.

**AMATEUR RADIO CIRCUITS BOOK**. AmRSGB Pub. 7/6. Postage 9d.

**COMPLETE CATALOGUE 1/-.**

**THE MODERN BOOK CO.**

BRITAIN'S LARGEST STOCKISTS of British and American Technical Books

**19-21 PRAED STREET  
LONDON, W.2.**

Phone: PADdington 4185.  
Open 6 days. 9-6 p.m.

1W-163 FOR FURTHER DETAILS.

**WELSH COLLEGE OF ADVANCED TECHNOLOGY  
CARDIFF**

**DEPARTMENT OF APPLIED PHYSICS  
POST-GRADUATE DIPLOMA IN ELECTRONICS**

Applications are invited for places in the full-time one year College Diploma Course in Electronics, commencing October, 1965. The course will be of particular interest to graduates, or equivalent, in science or technology wishing to consolidate their studies with a specialist year devoted to Electronics.

Further details can be obtained from the College Secretary, Welsh College of Advanced Technology, Cathays Park, Cardiff. Application forms should be completed and returned to the College as soon as possible.

**ENGINEERS**

required for Design and Instrumentation of Test Instruments. Qualifications H.M.C., if possible, or experienced engineers. Salary to be discussed at interview.

Please apply in writing to the:—

**Personnel Office,  
Radio and Television,  
Ingate Place,  
Queenstown Road, S.W.8**

## TEST ENGINEERS AND CALIBRATION ENGINEERS

Resulting from expanding Research and Development Programmes

**E.M.I. Electronics Ltd.** have a requirement for Test Engineers (together with Assistant grades) and Calibration Engineers for their establishments at Hayes and Feltham, Middlesex.

Successful applicants will be engaged on interesting and challenging work related to a range of sophisticated electronic equipment involving the latest pulse and semi-conductor techniques.

Applicants should have a sound basic knowledge and experience of electronics and should preferably be of H.N.C. or City and Guilds standard. A knowledge of transistors is desirable.

These posts could be of interest to technicians who have worked on Radio or T.V. Servicing or in the technical branches of H.M. Forces who wish to broaden their experience.

Staff conditions apply and a Contributory Pension Fund with free Life Assurance is in operation. Starting salaries will be dependent upon age, qualifications and experience.

Please write, giving brief details and quoting ref. **WWE/9/13**, to:

**Group Personnel Department, 04213/S,  
E.M.I. Limited, Hayes, Middlesex.**

### "WIRELESS WORLD" TEST INSTRUMENTS

Complete sets of Metalwork, machine engraved Front Panels, Special Tag Boards and all specified 1st grade components.  
For professional appearance and performance.  
Send 6d. in stamps for lists.

#### MALVYN ENGINEERING WORKS

Engineers to the Radio and Electronic Industries  
**7 CURRIE STREET, HERTFORD, HERTS.**  
TELEPHONE: HERTFORD 2264

**1WW-164 FOR FURTHER DETAILS.**

### ELECTRONIC TESTERS and SERVICE ENGINEERS REQUIRED

for interesting work on Radio Transmitters, Receivers, Amplifiers, Test Instruments and General Electronic Apparatus.

If you have a monotonous job and want to better yourself, apply for a post with us which offers:—

- Secure Employment.
- Scope for Advancement.
- Five Day Week.
- Staff Status.
- Holiday and Sick Pay allowance.
- Congenial Working Conditions.

Apply to Personnel Department.

**LABGEAR LTD.,  
CROMWELL ROAD,  
CAMBRIDGE.**

### SERVICE & REPAIRS

**PRINTED** circuit service; small quantity runs quickly and economical.—Quotations and information from **Teleradio Co., Ltd.**, 18, Turnpike Lane, N.8. [2888

**SPEAKER** repairs, cones fitted, guaranteed satisfaction.—**L.S. Repair Services, Pluckley, Ashford, Kent.** [0223

**SPEDDY** and expert tape recorder and hi-fi repairs by England's leading hi-fi specialists.—**Telesonic, Ltd.**, 92, Tottenham Ct. Rd., London, W.1. Mus. 8177. [0025

**CATHODE** ray tubes, direct from factory offer, your tube rebuilt to brand new with latest type superior American gun, quick service with full year guarantee, example: 171n, £4/7/6.—Write for full details now to **Electronic Services, Ltd.**, 44, Fulman St., Hull. [26

**ALL** makes and types of communications receivers, transmitters overhauled to original specifications. **ARR8D-LF, etc.**, trade facilities available, your home and export enquiries invited.—Dept. "P," Highgate Radio Services, 219, Moseley Rd., Birmingham, 12, Cal. 1039. [1049

### NYLON · P.T.F.E.

ROD, BAR, SHEET, TUBE, STRIP, WIRE  
No quantity too small. List on application.

**BRASS · COPPER · BRONZE  
ALUMINIUM · LIGHT ALLOYS  
STAINLESS STEEL**

**H. ROLLET & Co. Ltd.**

Howie Street, S.W.11. BA7ersa 7872  
ALSO AT LIVERPOOL, BIRMINGHAM,  
MANCHESTER, LEEDS, GLASGOW

**1WW-165 FOR FURTHER DETAILS.**



**For sound sense**

WEST NORWOOD LONDON SE27  
GIPSY HILL 1131

**1WW-166 FOR FURTHER DETAILS.**

## RADIO TECHNICIAN

A number of suitably qualified candidates will be required for training, leading to permanent and pensionable employment. (Normally at Cheltenham but with opportunities for service abroad or appointment to other U.K. stations.)

Applicants must be 19 or over and be familiar with the use of Test Gear and have had Radio/Electronic workshop experience. They must offer at least "O" level G.C.E. passes in English Language, Maths, and/or Physics, or hold the City and Guilds Telecommunications Technician Intermediate Certificate or equivalent technical qualifications.

Pay according to age, e.g., at 19, £722; at 25, £929 (highest pay on entry) rising by four increments to £1,067.

Prospects of promotion to grades in salary range £997-£1,634.

Annual leave allowance of 3 weeks, 3 days, rising to 4 weeks 2 days.

Normal Civil Service sick leave regulations.

Apply:

Recruitment Officer (RT/3),  
Government Communication  
Headquarters,  
Oakley, Priors Road, Cheltenham.

### CAPACITY AVAILABLE

**RECTIFIERS**, Selenium and Silicon units supplied for all applications, keen prices, good deliveries. **J. R. SERVICES & DEVELOPMENTS**, 231, Rivermill, Harlow, Essex. Tel. Harlow 26481. [112

**AIRTRONICS, Ltd.**, for coil winding, assembly and wiring of electronic equipment, transistorised sub-units, sheet metal work—4, Ashmead Rd., London, S.E.8. Tel. Tideway 2249. [107

### MISCELLANEOUS

If you want to advertise in the MAIL ORDER section of February Wireless World ring Wat. 3333, ext. 210, for details NOW. [1001

**RADIO** remote control, 25/30mc/s systems, transmitters, receivers and servos, designs and complete equipment available.—**Teleradio Electronics**, 18, Turnpike Lane, N.8. [2929

**METALWORK**, all types cabinets, chassis, racks, etc., to your own specification, capacity available for small milling and capstan work up to 1in bar. **PHILPOTT'S METAL WORKS, Ltd.**, Chapman St., Loughborough. [123

**RADIO** engineer, with technical skill, organising ability and capital, former works manager, desires partnership in small expanding electronic/radio firm, West of London.—Box WW 46, Wireless World. [2929

**SELL! Sell! Sell!** Your products through the mail order page on 121.—Apply for details now for February, Mail Order, "Wireless World," Dorset House, Stamford St., S.E.1. Tel. Wat. 3333, Ext. 210.

## TESTERS

required for interesting work on L.F. and H.F. Transmitters. Previous fault-finding experience essential.

The positions available would be of special interest to persons employed in the fault-finding and repair of television who are keen to establish themselves in a position that offers:

- ★ Satisfactory employment
- ★ Five-day week
- ★ Good prospects of advancement
- ★ Staff status
- ★ Sick pay
- ★ Generous salary

Apply: Personnel Manager

**Multitone Electric Co. Ltd.**  
12-20 Underwood St., London, N.1

## SOUTHERN RADIO SUPPLY LTD.

11, LITTLE NEWPORT STREET, LONDON, W.C.2. GERard 6653

GOODS AS PREVIOUSLY ADVERTISED STILL AVAILABLE

Bombsight Computers; Frequency Crystals; Test Meters No. 1; Accessories for Type "38" and "18" Transceivers, etc., etc.

## WORLD RADIO & T.V. HANDBOOK 1965 ED. 26/-

By JOHANSEN. Postage 1/-.

Amateur Radio Circuits Book, new ed. by R.S.G.B. 7/6. P. & P. 1/-.  
Five Speakers, How to Make Them by Miles Henslow. 5/- P. & P. 9d.  
Amateur Radio Call Book 1965 ed. by R.S.G.B. 5/- P. & P. 6d.  
Aerial Handbook by Briggs. 8/6. P. & P. 1/-.  
Transistor Amplifiers for Audio Frequencies by Roddam. 45/- P. & P. 1/6.  
ABCs of Short Wave Listening by Buckwalter. 16/- P. & P. 1/-.  
The Amateur Radio Handbook by R.S.G.B. 34/- P. & P. 2/3.  
British Transistor Directory by Bradley. 8/6. P. & P. 6d.

## UNIVERSAL BOOK CO.

12 LITTLE NEWPORT STREET, LONDON, W.C.2. (adjoining Lisle Street)

1WW-167 FOR FURTHER DETAILS.

BENSON'S better bargains, send s.a.e. for free catalogue of Government and manufacturers' electronic surplus.—Superadio (W.), Ltd., 116, Whitechapel, Liverpool, 1. [100]

TRANSISTORS, unmarked, untested, 40 for 10/-, p.p. 1/-; 4-3/4 cts. 3/4 post free relays, thousands of types special catalogue free; general catalogue of mechanical and electrical gear, tools, etc., 5,000 items, free.—K. R. Whiston (Dept. WRW), New Mills, Stockport. [2729]

### TUITION

THE Incorporated Practitioners in Radio & Electronics (I.P.R.E.), Ltd., Membership Conditions booklet, 1/-; sample copy of I.P.R.E. Official Journal, 2/- post free.—Secretary, Dept. A. 32, Kidmore Rd., Caversham Rd., Caversham, Reading, Berks. [104]

## R & R RADIO & TV SERVICE

Dept. W.W., MARKET STREET, BACUP, LANCs. Telephone 465

SALVAGE VALVES		Tested before dispatch	
6F13	4/6	10P14	5/-
6L18	4/6	20P5	6/6
6F80	1/6	30P4	7/-
ECC82	3/-	6F15	5/-
ECL80	3/6	EB91	1/-
30F5	6/-	EF85	5/-
PL38	6/-	630L2	4/-
PCF80	4/-	20P3	6/-
PL51	5/-	30PL1	4/-
PZ30	5/-	PL39	6/-
U299	5/-	PL82	5/-
PL82	3/6	20P4	6/6
U801	7/6	30P16	5/-
10F1	1/6	PCC84	4/-
20F2	5/6	PCL53	5/-
30FL1	5/-	PY31	3/6
PY32	6/-	U301	6/-
6U4GT	5/-	10P13	5/6
6R1	2/6	20D1	2/-
ECC81	3/-	30P12	5/-
EY80	4/-	PV82	5/-

Speakers, Ex-TV, 5in. round, 6 x 4in., 3/8; 8in. round 6/-; post 2/-.  
Line Output Transformers available. State set Model No.  
Turret Tuners, 8/-, post 2/-.  
Sear Coils, etc. Quote set Model No. with all enquiries and S.A.E. for prompt reply. All goods subject to satisfaction or money refunded.

1WW-168 FOR FURTHER DETAILS.

# AUTO TEST EQUIPMENT

TELEPHONE CABLES LIMITED of DAGENHAM, ESSEX.

invites applications from men aged 18 or over who have O.N.C. or studying electrical engineering. Preferably with experience in electrical measurements and practical wiring from circuit diagrams.

## REQUIRED FOR DEVELOPMENT AND BUILDING OF TELEPHONE CABLE TESTING INSTRUMENTS

Pension Scheme · Canteen · Sports etc.

Please write to Employment Officer

### EXPERIENCED DEVELOPMENT ENGINEER

required by expanding company.

Must be fully experienced in the field of audio work and transistor techniques, as applied to high powered musical instrument amplification. Must be capable of developing projects on own initiative and being fully responsible for quality control throughout. Salary commensurate with experience and ability, Box 5330, Wireless World.

FULL-TIME courses for P.M.G. certificates and the radar maintenance certificate, also in electrical and electronic engineering.—Information from College of Technology, Kingston upon Hull. [122]

BECOME "Technically Qualified" in your spare time, guaranteed diploma and exam. home-study courses in radio, TV, servicing and maintenance, R.T.E.B., City and Guilds, etc.; highly informative 120-page Guide—free!—Chambers College (Dept. 433), 148, Holborn, London, E.C.1. [121]

RADIO officers, see the world; sea-going and shore appointments; our many recent successes provide additional trainee vacancies during 1964/1965; day and boarding students; grants and scholarships available; stamp for prospectus.—Wireless College, Colwyn Bay. [0031]

I.E.R.E., City & Guilds and R.T.E.B. exams; specialised I.C.S. home-study course will ensure success.—For details of wide range of exam. and diploma courses in radio, TV and electronics, also new practical courses with kits, write to I.C.S. (Dept. 522), Parkgate Rd., London, S.W.11. [119]

I.E.R.E., City & Guilds and R.T.E.B. exams; specialised I.C.S. home-study course will ensure success.—For details of wide range of exam. and diploma courses in radio, TV and electronics, also new practical courses with kits write to I.C.S. (Dept. 522), Parkgate Rd., London, S.W.11. [102]

STUDY radio, television and electronics with the world's largest home study organisation, I.E.R.E., City & Guilds, R.T.E.B., etc.; also practical courses with equipment; all books supplied.—Write for free prospectus, stating subject, to I.C.S. (Dept. 422), Intertext House, Parkgate Rd., London, S.W.11. [117]

### TECHNICAL TRAINING


RADIO and TV exams and courses by Britain's finest home study school; coaching for I.E.R.E., City & Guilds, Amateurs Licence, R.T.E.B., P.M.G. Cert., etc.; free brochure from—British National Radio School, Russell St., Reading. [136]

P.M.G. Certificates, City & Guilds Examinations. I.E.R.E., also many non-examination courses in radio, TV and electronics; study at home with world famous I.C.S.—Write for free prospectus, stating subject, to International Correspondence Schools (Dept. 443), Intertext House, Parkgate Rd., London, S.W.11. [118]

### BOOKS

"TELEVISION Engineering Principles and Practice, vol. III. Waveform Generation," by S. W. Ames, B.Sc. (Hons.), A.M.I.E.E., and D. C. Birkinshaw, M.B.E., M.A., M.I.E.E. The third volume of a comprehensive work on the fundamentals of television theory and practice, written primarily for the instruction of BBC engineering staff. This volume gives the application in television and sinusoidal, rectangular, sawtooth and parabolic waves and shows the mathematical relationship between them. The main body of the text is devoted to the fundamental principles of the circuits commonly used to generate such signals, the treatment being largely descriptive in nature and therefore less mathematical than that of the previous volume. The work is intended to provide a comprehensive survey of modern television principles and practice, 30/- net from all booksellers. By post 31/- from Iliffe Books Ltd., Dorset House, Stamford St., London, S.E.1.

### ECA AESSD, RECEIVER (Brand New)



Freq. 640 kc/s.-32 Mc/s., 6 wave-band, mechanical bandspread with Logging scale, auto. and manual vol. control, ditto Noise Limiter, B.F.O. Pitch control, Var. HF Tone controls, RF and Crystal Filter. Complete with instructions/Service manual, spare valves, handset, aerial, etc. £75. Carr. 2.

AF Gain, Var. selectivity with Crystal Filter. Complete with instructions/Service manual, spare valves, handset, aerial, etc. £75. Carr. 2.

### WHEATSTONE BRIDGE



Centre Zero Galvanometer Scaled 20—0—20 2 1/2 in. movement, 2.5 mA. full scale deflection, 3 stud switch controls 0-10, 0-100 ohms, 0-in. Complete in carrying case with instructions, 45/-. Post 5/-. Spare meters

for above 10/- P. 1/6.  
TELESCOPIC AERIAL MASTS. Tubular steel copper-plated, spray finish, ring cam locking on each section provides for full or any height required. Suitable all fixings and base locations. Bottom section 1 1/2 in. diameter, 20ft. (4 section) Closed 5ft. 9in., Weight 10lb. 55/- Carr. 5/-. 34ft. (6 section) Closed 6ft. 6in., Weight 20 lb. 75/- Carr. 5/-. Further height by adding 3-4ft. Whipssections, 13/6. Carr. 1/6 (Special price for quantities).

CREED TELEPRINTERS. 7B used condition, £12/10/- Carr. 30/-.  
E44 MK. II & III. Dipole and rod aerials 30/- per set. P. & P. 5/-; Microphone with connecting plug, 15/6. P. & P. 2/-; battery input and phone plugs 5/- each. P. & P. 1/6.

POWER UNIT. 110/230 v. A.C. input. 'C' type drop through Parmeko Transformer, 350-0-315 v. 4.3 v. Double choke and paper type smoothing. Combined 4 valve including 5Z4 rectifier, 6V6 o.s. A.P. Amplifier. Self contained rack or table mounting. Fully fused. Indicator light. Mains switch. Brand new in makers cartons. 59/6. Carr. 5/-. (Quantity enquires invited).

TRANSMITTER. 1.75-16 Mc/s., 3 waveband tuneable, grid modulation using 813. Used complete with all valves, circuit, £7/10/- Carriage 10/-.  
MOVING COIL HEADPHONES. BRAND NEW. (chassis padded, complete with jack plug, 51/6. P. & P. 1/6.)

ALL NO. 19 SET PARTS AVAILABLE.  
Many other bargains. S.A.E. all enquiries  
A. J. THOMPSON  
"Eiling Lodge," Codscoote, Hitchin, Herts.  
Phone: Codscoote 242.

1WW-169 FOR FURTHER DETAILS.

"INTRODUCTION to Valves." By R. W. Hallows, M.A. Cantab., M.I.E.E., and H. K. Milward, B.Sc. Lond., A.M.I.E.E. Describes the principles, construction, characteristics and uses of most types of radio valves. The approach is simple and, as far as possible, non-mathematical, but the book provides the student with a thorough understanding of valves and how they work. 8/6 net from all booksellers. By post 9/4 from Iliffe Books Ltd., Dorset House, Stamford St., London, S.E.1.

"RADIO Designer's Handbook." Editor, F. Langford-Smith, B.Sc., B.E., Senior Member I.R.E. (U.S.A.), A.M.I.E.E. (Aust.), a comprehensive reference book; the work of 10 authors and 23 collaborating engineers, containing a vast amount of data in a readily accessible form; the book is intended especially for those interested in the design and application of radio receivers or audio amplifiers. Television, radio transmission and industrial electronics have been excluded in order to limit the work to a reasonable size. 65/- net from all booksellers. By post 67/9 from Iliffe Books Ltd., Dorset House, Stamford St., London, S.E.1.

# LAWSON BRAND NEW TELEVISION TUBES

**TWELVE MONTHS FULL REPLACEMENT GUARANTEE**



The continually increasing demand for tubes of the very highest performance and reliability is now being met by the new Lawson "Century 99" range of C.R.T.'s.

"Century 99" are absolutely brand new tubes throughout, manufactured by Britain's largest CRT manufacturers. They are guaranteed to give absolutely superb performance, needle sharp definition, screens of the very latest types giving maximum Contrast and Light output; together with high reliability and very long life.

"Century 99" are a complete range of tubes, in all sizes for all British sets manufactured 1947-1964.

Our stocks are very large and we can supply the EXACT tube you require by return.

- 12" — £4 : 10 : 0
- 14" — £5 : 10 : 0
- 17" — £5 : 19 : 0
- 19"-21" — £7 : 15 : 0

**LAWSON TUBES**  
2, PEACHFIELD CLOSE,  
MALVERN, WORCS.  
Tel. 2100

1WW-170 FOR FURTHER DETAILS.

Double Guarantee. 7 day Money Back Guarantee plus 12 months full Replacement Guarantee.

Today's Orders dispatched Today, and full fitting instructions are supplied with every tube.

Terms: C.O.D. or C.W.O. Carriage and insurance 8/6.


## TESTED TRANSISTORS

OA202, 1/- each. OC44, OC45, OC81, OC81D, 3/- each. AF114/5/7, SX658, OC170/1, 4/- each. 2S013, OC26/28/35, GET571, 10/- each. XA101/2, XB103/4, XA111/2, 2/- each. RED OR WHITE SPOTS, 1/- each. OC139, BY100, GET8, 5/- each. ZENERS ¼ watt, 3/6 each. 1.5 watt, 5/- each. 7 watt, 6/- each. S.A.E. LIST AND COMP. EQ. CHART FREE.

**B. W. CURSONS**  
78 BROAD STREET, CANTERBURY

1WW-171 FOR FURTHER DETAILS.

## THE COTELLA RANGE OF LOUDSPEAKERS & CABINETS

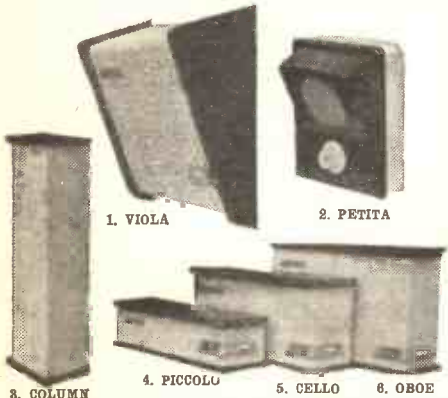


The Cotella range of loudspeakers is a break-away from the orthodox polished wooden cabinet. The main structure of the body is of steel with a contemporary covering of perforated P.V.C. leather cloth.

For full details write to: **J. G. COATES LTD.,**  
Traitaigar Street, Burnley. Tel: 4376

1WW-172 FOR FURTHER DETAILS.

"ABACS of Nomograms." By A. Giet. Translated from the French by H. D. Phippen and J. W. Head. Most engineers have made use of nomograms at some time in their careers, and are fully alive to the fact that they are a very convenient tool when the same formula has to be solved repeatedly for several sets of variables. It is fair to say, however, that only a small proportion of even those who habitually employ nomograms know how to construct them for their own use. Most of the comparatively small literature on the subject is written for mathematicians and is extremely difficult for the practical engineer to comprehend. This book is essentially practical, and not only demonstrates the many and varied applications of the abac of nomogram, but shows how even those without highly specialized mathematical knowledge may construct their own charts. 35/- net from all booksellers. By post 36/- from Iliffe Books Ltd., Dorset House, Stamford St., London, S.E.1.

## ODDIE FASTENERS



THE FASTENER WITH ENDLESS APPLICATIONS - SIMPLE - POSITIVE SELF-LOCKING. MADE IN A VARIETY OF TYPES AND SIZES. SPECIAL FASTENERS TO SUIT CUSTOMERS' REQUIREMENTS. WIDELY USED IN THE RADIO INDUSTRY.

Illustrated brochure and other information will be gladly sent on request.

**ROSS, COURTNEY & COMPANY, LTD.**  
(ODDIE FASTENERS DIVISION)

Terminal House, Elthorne Road,  
London, N.19. TEL: Archway 0551  
CABLES: "HOMONYMS, HOLWAY," LONDON

1WW-173 FOR FURTHER DETAILS.

## LONDON CENTRAL RADIO STORES

**WIRELESS SET NO. 38 A.F.V.** Freq. range 7.5 to 9.0 Mc/s. Working range 4 to 2 miles. Size 10 1/2 in. x 4 in. x 6 1/2 in. Weight 6 1/2 lbs. Includes power supply 8 lbs.—and spare valves and vibrator, also tank aerial with base. £6 per pair or £3 single. Callers only.

**EX EQUIPMENT COLLARO.** 3 speed auto changers complete with arm and p.u. Hi-Fidelity Model RC54 also Model RC531. A.C. mains. Approx. size 13 in. x 11 1/2 in. Height 7 in. £3. P. & P. 10/-.

**20-WAY PRESS-BUTTON INTER-COM. TELEPHONES** in Bakelite case with junction box. Thoroughly overhauled. Guaranteed. £7/15/- per Unit. Complete Installation £135.

**10-WAY PRESS-BUTTON INTER-COM. TELEPHONES** in Bakelite case with junction box. Thoroughly overhauled. Guaranteed. £6/15/- per Unit. Complete Installation £60.

Wiring Diagrams for 10 and 20 ways on application.

**10-WAY PUSH-BUTTON KEY TYPE STEEP.** Size approx. 10 1/2 in. x 3 1/2 in. 10/-.

**P.M. MOVING COIL SPEAKERS.** 5 in. 9/6. 8 in. 3 ohm. 10/6. Elliptical 7 x 4 in. 3 ohm 10/6.

**SUPERIOR TYPE DESK PHONES.** Black Bakelite cases. Complete with Hand Set. Dial 0-9 and internal bell. £3/7/6.

**G.P.O. TELEPHONE TYPE CARBON HANDSETS 10/6.** ELECTRICITY SLOT METERS (1/2-in slot) for A.C. mains. Fixed tariff to your requirements. Suitable for hotels, etc. 200/250 v. 10 A. 84/-; 15 A. 94/-; 20 A. 104/-; other amperages available. Reconditioned as new. 2 years' guarantee.

**QUARTERLY ELECTRIC CHECK METERS.** Reconditioned as new. 200/250 v. 10 A. 42/6; 15 A. 52/6; 20 A. 57/6. Other amperages available, 2 years' guarantee.

**8-BANK UNISELECTOR SWITCHES.** 25 contacts, alternate wiring £2/15/-; 8 bank half wipe £2/15/-; 6 banks, half wipe, 25 contacts. 47/6.

**ALL GAUGES INSTRUMENT WIRE.** Tin copper enamelled cotton silk resistance wires from 16 S.W.G. to 60 S.W.G. List sent on request. Send S.A.E.

**HIGH-SPEED ELECTRO-MAGNETIC COUNTERS.** Ex-Govt. 0-9,999, 25/50 v. D.C. Size 4 x 1 x 1 in. Single coil 2,300 Ω. Single coil 500 Ω 15/-.

All prices include carriage in United Kingdom except where otherwise stated.

**23 LISLE ST. (GER. 2969) LONDON, W.C.2**  
Closed Thursday 1 p.m. Open all day Saturday

1WW-174 FOR FURTHER DETAILS.

## AMERICAN Test & Communications Equipment


- AN/UPM-11A (TS-738) General purpose 3 C/M Radar range Cal. Max. range 35,000 yds. Acc. 5/15 yds.
- AN/UPM-63 Airborne Radar testing, pulse Gens.
- AN/UPM-66 Airborne Radar test sets.
- TS-90/0 Radar Dummy Loads.
- TS-140/PCM Wide range AF. Oscillator and separate DBM meter.
- TS-297/U Precision built Multimeters.
- TS-402A Precision AF/RF Attenuators. Imp 600 Ohms Range 0/81 DB in 1 DB steps.
- TS-414/U Universal Dynamotor Testers. Analyses all functions of 14V. and 28V. Dynamotors under full load conditions.
- T-181 Weston Electric Relay Testers.
- 304 Dumont Oscillographs. Equiv. to MIL. Type OS-46.
- AN/FPN-13 Radar Equipments.
- AN/FRC-27 & AN/TRC-34 Transceivers freq. 152/174 Mc/s. Output 50W. 115/230V. Mains op.
- AN/VRC-19 & AN/VRC-19X Mobile F.M. Transceivers freq. as above, output 20/25W. Supply/V. 24 and 12 respectively
- AN/ARC-3 Airborne V.H.F. Transceivers freq. 100/156 Mc/s. in 8 channels.
- AN/ARC-36 16 channel conversion of above. 50W. V.H.F. Transmitters freq. 100/156 Mc/s. 115/250V. mains op.
- BC-640/B Collins Antenna couplers, for operating up to 5 comm. receivers from a single aerial. Freq. range 2/32 Mc/s.
- CU-168/FRR Telegraph Carrier Terminals. Teletype transmitter distributors.
- CF-2 Teletype page printers.
- TT-52
- TG-7B

**SUTTON ELECTRONICS**  
Salthouse, Nr. Holt, Norfolk. Cley 289

1WW-175 FOR FURTHER DETAILS.


# CABINETS AT SENSIBLE PRICES FROM £5.17.6d!

You can be sure of meeting the exact cabinet you require when you examine the most extensive range in the country at Lewis Radio, here are just two examples:

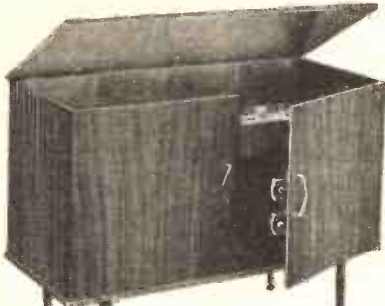

**THE BRAHMS**  
Price 27 gns.

This new elegant Brahms cabinet is available in medium walnut and medium mahogany with 9in. legs and will take any tape deck, turntable, tuner and pre-amplifier, the largest stereo amplifier plus record and tape storage.



**THE LOWBOY**  
Price 27 gns.

This rigidly constructed Hi-Fi cabinet will accommodate even the largest Hi-Fi units—available in teak, walnut or stripey sapele mahogany—size 53in. long by 18in. deep by 26in. high including 12in. legs.

**FREE: THE NEW LEWIS CATALOGUE**  
Designed to assist your choice of cabinet.

**THE new Lewis Radio Cabinet Catalogue—the most comprehensive ever prepared. Sent absolutely Free.**

Please send your free 24-page colour cabinet catalogue.

NAME .....

ADDRESS .....

.....(Dept. W 1/65).....

CAPITALS PLEASE

**LEWIS radio**

100 CHASE SIDE, SOUTHGATE LONDON, N.14  
Telephone: Palmers Green 3733/9666  
1W W—176 FOR FURTHER DETAILS.

**"RADIO Interference Suppression as Applied to Radio and Television Reception."** By G. L. Stephens, A.M.I.E.E. 2nd Ed. An up-to-date guide to the various methods of suppressing electrical interference with radio and television reception. Many practical applications are given, particular attention being paid to the problem of interference at television frequencies. Other chapters deal with the design and choice of suppressor components, methods of locating the source of interference, and suppression of the receiver itself. 10/6 net from all booksellers. By post 11/2 from Iliffe Books Ltd., Dorset House, Stamford St., London, S.E.1.

**"ULTRASONIC Delay Lines"** C. F. Brockelsby, B.Sc., A.R.C.S., A.M.I.E.E., J. R. Paleyfreeman, R. W. Gibson, B.Sc.(Eng.), Grad.I.Mech.E. The authors are members of a team which has been working on ultrasonic delay lines, since the early days, at the Mullard Research Laboratories. This is the first book to be written specifically on the subject, which has important applications in radar, radio and television, electronic computers, pulse-forming networks, correlation techniques and multi-channel communication systems. The early chapters discuss basic principles and the various types of delay lines are then covered. The chapter on electronics for delay lines deals fully with the design of broad-band amplifiers, oscillators, etc., either with transistors or valves. The last two chapters are devoted to the delay line measurements and the many applications of delay lines. Among the five appendices there is one containing nearly 60 curves which give the characteristics of many delay line materials. The final appendix discusses one of the latest developments, ceramic transducers. 65/- net, 66/3 by post.

**"BASIC Mathematics for Radio and Electronics."** By F. M. Colebrook, B.Sc., D.I.C.A.C.G.I. Revised and enlarged by J. M. Head, M.A. (Cantab.). presents in readable form a complete course in basic mathematics from engineering students of all kinds and leads on to the more advanced branches of mathematics of increased importance to radio engineers. In this edition the chapter covering the application of mathematics to radio has been revised and enlarged, while new subjects covered include Stability, Linear Differential Equations, Elementary Statistics, Short Cuts to Numerical Calculations and an Introduction to Matrices. Will be invaluable to those without previous knowledge of the subject. 17/6 net from all booksellers. By post 18/6 from Iliffe Books, Ltd., Dorset House, Stamford St., London, S.E.1.

**"WIRELESS Servicing Manual."** W. T. Cocking, M.I.E.E. This is the tenth edition of a book which since 1936 has been known to radio servicemen everywhere as a reliable thorough and comprehensive guide to solving most of the problems that arise in the repair, maintenance and adjustment of the modern radio receiver. In the present edition a major addition is a chapter devoted to transistors and transistor sets. The author of "Wireless Servicing Manual" is well known to a wide circle of readers as former editor of "Electronic Technology" and now of "Industrial Electronics." His crisp lucid style makes this handbook of utmost value to the service man and amateur alike. 25/- net, 26/- by post from Iliffe Books Ltd., Dorset House, Stamford St., London, S.E.1.

**SELL**

*Your products through the new feature on page*

**121**

●

APPLY FOR DETAILS:

MAIL ORDER,  
WIRELESS WORLD,  
DORSET HOUSE,  
STAMFORD STREET,  
LONDON, S.E.1.

●

Tel.: WATERloo 3333  
Ext. 210

# EXCLUSIVE OFFERS

## AMERICAN AVIONIC EQUIPMENT

- |             |             |
|-------------|-------------|
| ★ AN/ARC-3  | ★ AN/ARC-27 |
| ★ AN/ARC-5  | ★ AN/ARC-33 |
| ★ AN/ARC-34 | ★ AN/ARC-52 |
| ★ AN/ARN-6  | ★ AN/ARN-7  |
| ★ AN/ARN-14 | ★ AN/ARN-21 |
| ★ AN/GRC-27 | ★ AN/GRC-32 |
| ★ AN/VRC-27 | ★ AN/VRC-19 |

## AMERICAN MICROWAVE TEST EQUIPMENT

- ★ AN/UPM-33 (TS-148/UP) Radar general purpose Test Sets 8,470/9,360 mc/s.
- ★ WATERMAN 52B portable general purpose 3in. Oscilloscopes.
- ★ TS-197 G.P. Oscilloscopes
- ★ R.C.A. 2/4 mc/s. 100 w. Dummy loads DA-72/U.
- ★ HOLTZER CABOT general purpose 500 v. Megohmmeters AN/USM-2A.
- ★ BERKELEY CORPORATION Model 554 high speed electronic Counters (digital display). FR-67/U
- ★ TS-352/U Multimeter Test Sets. (ME-9B).
- ★ TS-382C Audio Oscillators 20/20,000 cye.
- ★ TS-666/AP Potentiometers.
- ★ T-281/ARC-21 Test Sets.
- ★ AN/PDR-39 Radiac.
- ★ AN/UPM-11 Range Calibrators (TS-738A).
- ★ AM-URM-36 Signal Generators 7,805/10,760 mc/s.

40-page List of over 1,000 items in stock available—keep one by you.

- ★ POLARAD URM-36 Signal Generators, 7,850/10,760mc/s.
- ★ MUNSTON 268D Crystal Rectifier Test Sets.
- ★ TS-147D/U Aircraft Beacon Test Sets, measure frequency spectrum and fluctuation. 8,470/9,360 mc/s.
- ★ HICKOK TV-7/U Mutual Conductance Valve Testers
- ★ PRESS WIRELESS portable Voltage Dividers (minimum 5 kc/s. maximum 35 kv. 20 mmfd.).
- ★ SPERRY T101002 Amplifier Analyser Test Equipments.
- ★ LAVOIE 239A High Speed Oscilloscopes. AN/USM-50
- ★ AN/UPM-1 Test Sets 150-550 mc/s.
- ★ MD-82A/ARN V.O.R. modulators.
- ★ OS-8 Oscilloscopes.
- ★ TS-497B URR Signal Generators 2/440 mc/s.
- ★ TS-505D/U V.T.V.M. Multimeters.
- ★ AN/ARM-7 R.F. Wattmeters.
- ★ AN/URM-64 Sig. Generators 900/2,000 mc/s.
- ★ TS-297/U Multimeters.
- ★ AN/UPM-6B Test Equipments.
- ★ 863A Airport control tower Monitors.
- ★ 447G Airport control tower Amplifying equipment.

## AMERICAN TELETYPE EQUIPMENT

- ★ TT-5/FG page printers.
- ★ TT-16/FG reperforators.
- ★ TD-30 tape readers.
- ★ Teletype Coder-Decoder Privacy Equipments.

Carriage extra on all above.

We have a large quantity of "bits and pieces" we cannot list—please send us your requirements as we can probably help—all enquiries answered.

**P. HARRIS**  
**ORGANFORD-DORSET**  
WESTBOURNE 65051

1W W—177 FOR FURTHER DETAILS.



## Record Cleaning & Maintenance Equipment

Send stamps value 9d. for post free copy of 16 page booklet "A Guide to the better care of your L.P. and Stereo Records."

**CECIL E. WATTS LTD.**

Consultant & Sound Engineer

Darby House Sunbury-on-Thames, Middx  
1W-178 FOR FURTHER DETAILS.

## DECADE BOXES



CAPACITY 15pf to 111μF  
RESISTANCE 0.1Ω to 100KΩ  
VOLTAGE DIVIDERS and  
WHEATSTONE BRIDGES

**LIONMOUNT & CO. LTD.**

24 LYNTON ROAD, LONDON, N.8  
Tel: Fitzroy 4178

1W-179 FOR FURTHER DETAILS.

## DAMAGED METER?

Have it repaired by Glaser

Reduce overheads by having your damaged Electrical Measuring Instruments repaired by L. Glaser & Co. Ltd.

## INSTRUMENT REPAIRS

We specialise in the repair of all types and makes of Voltmeters, Ammeters, Microammeters, Multirange Test Meters, Electrical Thermometers, Recording Instruments, etc.  
As contractors to various Government Departments, we are the leading Electrical Instrument Repairers in the industry. For prompt estimate and speedy delivery send defective instrument by registered post, or write to Dept. W.W.1—

**L. GLASER & CO. LTD.**

1-3 Berry Street, London, E.C.1.  
Tel.: Clerkenwell 5481-2

1W-180 FOR FURTHER DETAILS.

# INDEX TO ADVERTISERS

Appointments Vacant Advertisements appear on pages 125 to 138

Acoustical Mfg. Co., Ltd.	PAGE 2
Adcola Products, Ltd.	16
A.D.S. Relays, Ltd.	84
Advance Electronics, Ltd.	49
Ason Laboratories, Ltd.	120
Airmec, Ltd.	48
Akurate, Eng. Co.	131
A.K.G.	54
Alpha Radio Supply Co., Ltd.	86
Anders Electronics, Ltd.	12
A.N.T.E.X., Ltd.	23
Armstrong Audio, Ltd.	20
Audix, B. E., Ltd.	104
Avo, Ltd.	1, 3
Avon Communications & Electronics, Ltd.	70
Batey, W., & Co., Ltd.	60
Berry's Radio	118
Bradley, C. & E., Ltd.	14
Brenell Engineering, Ltd.	42
Britain, Chas., (Radio), Ltd.	107
British Communications Corp'n., Ltd.	37
British Electrical Resistance Co., Ltd.	69
British Institute of Engineering, Technology	60
British Insulated Callenders Cables, Ltd. Cover II	11
British National Radio School	70
Bulgin, A. F., & Co., Ltd. Edit.	55
Bullers, Ltd.	68
C. & N. (Electrical), Ltd.	40
Cannon Electric, Ltd.	59
Carr Pastener Co., Ltd.	51
Celestion, Ltd.	25
Chelmsford College	130
Clark, A. N., (Engineers), Ltd.	16
Clyne Radio, Ltd.	116, 117
Coates, J.	136
Coventry Controls, Ltd.	64
C.R.E.I. (London)	27
Curson, B. W.	156
Daly Condensers, Ltd.	118
Daystrom, Ltd.	8, 9, 10, 11
Dence (Clacton), Ltd.	32
Direct T.V. Replacements	64
Drake Transformers, Ltd.	17
E.K. Electronics (I.A.), Ltd.	56
Eitel-McCullough	34
Electrowool, Ltd.	46
Electro-Winds, Ltd.	62
Electronics (Croydon), Ltd.	103
Electrosil, Ltd.	35
Elliott Bros. (London), Ltd.	92
English Electric Valve Co., Ltd.	18
Erle Resistor, Ltd.	43
ETA Tool Co., Ltd.	58
Ever-Ready Co. (G.B.), Ltd.	44
Fane Acoustics, Ltd.	22
Feedback, Ltd.	13
Ferrogaph Co., Ltd.	61
Finnegan Paint, Ltd.	129
G.E.O. Electronics, Ltd.	6
Gee Bros. (Radio), Ltd.	98
Gladstone Radio	102
Glasier, L., & Co., Ltd.	133
Goodmans Industries, Ltd.	41
Goodwin, C. C. (Sales), Ltd.	94
Gramplan Reproducers, Ltd.	66

Hall Electric, Ltd.	PAGE 67
Harnsworth, Townley & Co.	32
Harris Electronics (London), Ltd.	104
Harris, F.	137
Harverson Surplus Co., Ltd.	100, 101
Henry's (Radio), Ltd.	92, 93
HCD Research, Ltd.	56
Horton's Electronics	120
Howell's Radio, Ltd.	54
H.P. Radio Services, Ltd.	44
I.M.O. (Electronics), Ltd.	99, 100
Impex Electrical, Ltd.	48
International Correspondence Schools	66, 68, 130
J. T. Supply	120
K.E.F. Electronics, Ltd.	56
Kenure, Holt & Co., Ltd.	104
Keyswitch Relays, Ltd.	7
Kinetrol, Ltd.	85
Lasky's Radio, Ltd.	112, 113, 114, 115
Lawson Tubes	136
Leak, H. J., & Co., Ltd.	81
Ledon Instruments, Ltd.	84
Leavers-Rich Equipment, Ltd.	51
Levell Electronics, Ltd.	24
Lewis Radio Co.	137
Lexor Electronics, Ltd.	48
Light Soldering Developments, Ltd.	48
Linear Products, Ltd.	36
Lionmount & Co., Ltd.	138
London Central Radio Stores	136
Lyons, Claude, Ltd.	50
M.A.C., Ltd.	102
Mail Orders	121
Malvern Engineering Works	134
Marconi Company, Ltd.	75, 76
Marconi Instruments, Ltd.	28, 29
Marshall, A., & Son	132
Martin Electronics, Ltd.	84
McMurdo Instrument Co., Ltd.	38
Mills, W.	87
Minimittler (1964), Ltd.	54
Modern Book Co.	133
Morhan Exporting Corp'n.	22
Moss Watson Co.	104
M.R. Supplies, Ltd.	44
Mullard, Ltd.	74
Multicore Solders, Ltd.	118, Cover iv
Multitone Electric Co., Ltd.	30
Newport Instruments, Ltd.	66
Nombrex, Ltd.	52
Olson Electronic, Ltd.	85
Orchard & Ind., Ltd.	46
Painton & Co., Ltd.	19
Papsi-Motoren	52
Partridge Transformers, Ltd.	68
P.C. Radio, Ltd.	111
Peto-Scott Electrical Instruments, Ltd.	42
Philips N.V.	77
Pinnacle Electronic Products, Ltd.	15
Pitman, Sir Isaac, & Son, Ltd.	100
Post Radio Supplies	131
Premier Radio Co.	116, 117
Proops Bros., Ltd.	94
Pye Telecommunications, Ltd.	4, 5, 21

Quartz Crystal Co., Ltd.	PAGE 118
R. & R. Radio	135
Raaco, Ltd.	71
Racal Engineering, Ltd.	31
Raidorf Electronics, Ltd.	38
Radio & T.V. Components (Acton), Ltd.	109
Radio Clearance, Ltd.	104
Radio Component Specialists	95
Radio Exchange Co., The	102
Radiospares, Ltd.	85
Radiotractor	64
Radio Suppy (M/c), Ltd.	88, 89, 90
R.C.A. (Great Britain), Ltd.	65
R.C.S. Electronics	60
Redion, Ltd.	76
Reproducers & Amplifiers, Ltd.	62
Resolound, Ltd.	53
Rollet, H., & Co., Ltd.	134
Ross, Courtney & Co., Ltd.	136
Samsons (Electronics), Ltd.	108
Scientific Products	130
S.D.S.A.	70
Service Trading Co.	90, 91
Sifam Electrical Instrument Co., Ltd.	40
Sinclair Radionics	82, 83
Smith, G. W. (Radio), Ltd.	71, 119
Smith, H. L., & Co., Ltd.	97
Smith, John, Ltd.	58
Sona Electronic Co.	96
Sotonian	120
Sound Coverage, Ltd.	86
South Supplies (Electrical), Ltd.	97
Southern Radio Supply, Ltd.	137
S.P.S. International, Ltd.	34
Spear Engineering Co., Ltd.	100
Specialist Switches, Ltd.	46
Stamford, A. L.	118
Stanley Palmer, G. A., Ltd.	57
Stern-Clyne, Ltd.	116, 117
Stratton & Co., Ltd.	Cover III
Sutton Electronics	136
Tannoy, Ltd.	134
Taylor Electrical Instns., Ltd.	26
Technical Trading Co.	130
Tektronix (U.K.), Ltd.	45
Tequipment, Ltd.	72
Thompson, A. J.	135
Thorn A.E.I. Radio Valves & Tubes, Ltd.	63, 80
Thorn Electronics, Ltd.	35
T.R.S. Radio	106
Universal Book Co.	135
Vacwell Eng. Co., Ltd.	39
Valradio, Ltd.	52, 58
Vitality Bulbs, Ltd.	71
Vortexion, Ltd.	79
Watts, Cecil E.	138
Waveforms, Ltd.	132
Wayne Kerr Laboratories, Ltd.	62
Webber, R. A., Ltd.	62
West Instruments, Ltd.	70
Wells, J.	129
Weymouth Radio Mfg. Co., Ltd., The	36
Wharfedale Wireless Works, Ltd.	58, 59
Whiteley Electrical Radio Co., Ltd.	47
Wilkinson, L. (Croydon), Ltd.	105
Wirecomp Electronics, Ltd.	110
Z. & I. Aero Services, Ltd.	122, 123

Printed in Great Britain for the Publishers, LIPFEE ELECTRICAL PUBLICATIONS LTD., Dorset House, Stamford St., London, S.E.1. by CORNWALL PRESS LTD., Paris Garden, London, E.E.1. Wireless World can be obtained abroad from the following: AUSTRALIA and NEW ZEALAND: Gordon & Gotch, Ltd. INDIA: A. H. Wheeler & Co. CANADA: The Wm. Dawson subscription service, Ltd.; Gordon & Gotch, Ltd. SOUTH AFRICA: Central News Agency, Ltd.; William Dawson & Sons (S.A.), Ltd. UNITED STATES: Eastern News Co., 306 West 11th Street, New York 13



**THE  
EDDYSTONE  
'840c'**



The Eddystone "840c" is an inexpensive, soundly engineered communications receiver giving full coverage from 400 kc/s to 30 Mc/s. It possesses a good performance and is built to give years of reliable service. The precision stop action dial—an outstanding feature of all Eddystone receivers—renders tuning easy right up to the highest frequency, and the long horizontal pointer gives better readability. Modern styling and a pleasing two-tone grey finish make it a most attractive receiver.  
List price £22. 0s. 0d.

**THE  
EDDYSTONE  
'940'**



The Eddystone "940" is a larger and more elaborate communications receiver, with a correspondingly better performance. It has two fully tuned radio frequency stages and two intermediate frequency stages; variable selectivity with a crystal filter; built-in carrier level meter and push-pull output stage. Sensitivity is very high and outstanding results can be expected. Workmanship, construction and finish are all to the usual high Eddystone standards. Styling is modern, with two-tone grey finish.  
List price £125. 0s. 0d.

**THERE'S AN  
EDDYSTONE  
COMMUNICATIONS  
RECEIVER  
FOR ANY FREQUENCY  
BETWEEN  
10 kc/s and  
1,000 Mc/s**

Please write for full Technical Specifications to the Manufacturers

**STRATTON & CO. LTD., BIRMINGHAM, 31**

# ERSIN *Multicore* SOLDER



## UNDER THE SEA

Ersin Multicore Solder is made in Europe's largest cored solder factory, and contains only the purest tin and lead plus five cores of extra-active non-corrosive Ersin flux. It is undoubtedly the world's finest and most reliable cored solder. **THERE IS AN ERSIN MULTICORE SOLDER FOR YOUR PURPOSE . . .** whether it be the rapid soldering of miniature components by a production soldering process, or the individual production of large units of equipment such as fully transistorised submersible repeaters. Alloy, diameter of the solder, type and percentage of flux in the solder are all points to be considered.

For production soldering processes Ersin Multicore Solder with 362P Ersin flux in 60 40 and Savbit No. 1 alloys, and containing an exclusive agent Pentacol, promote the extra rapid spread of the lower percentage of flux in the cores—less fumes are liberated—less flux residue is left.

Multicore Savbit Alloy, to which a precise amount of copper is added prolongs bit life up to ten times, ensures more consistent soldered joints, and eliminates maintenance of soldering iron bits.



*Ersin Multicore Solder is shown being used at the Erith factory of Submarine Cables Ltd., in the production of a submersible repeater designed to last for a minimum of 20 years under the sea without attention.*

The life and reputation of any piece of electronic equipment can rest entirely on the solder used in assembly, a minute fraction of its cost. That is why the finest, most dependable cored solder is invariably the most economical and best. Ersin Multicore is the most widely used cored solder in the U.K. and is exported to over 50 overseas countries.

**THERE IS AN ERSIN MULTICORE SOLDER FOR EVERY PURPOSE WHERE PRECISION SOLDERING IS REQUIRED**

CHM529

**ERSIN**  
*Multicore*  
**SOLDER**

Engineers and technicians are invited to write on their Company's letter heading for the completely revised 6th Edition of the 24-page booklet "MODERN SOLDERS" containing data on melting points, gauges, alloys, etc. Also, reprint of "Industrial Electronics" article "Erosion of Soldering Iron bits", by P. Sharples.

**MULTICORE SOLDERS LIMITED, MULTICORE WORKS,  
HEMEL HEMPSTEAD, HERTS. (BOXMOOR 3636)**