

REFERENCE COPY


S.S.B. AMATEUR TRANSMITTER



MARCH 1967
Three Shillings

Wireless World

ELECTRONICS • TELEVISION • RADIO • AUDIO

Checking Colour TV Scanning

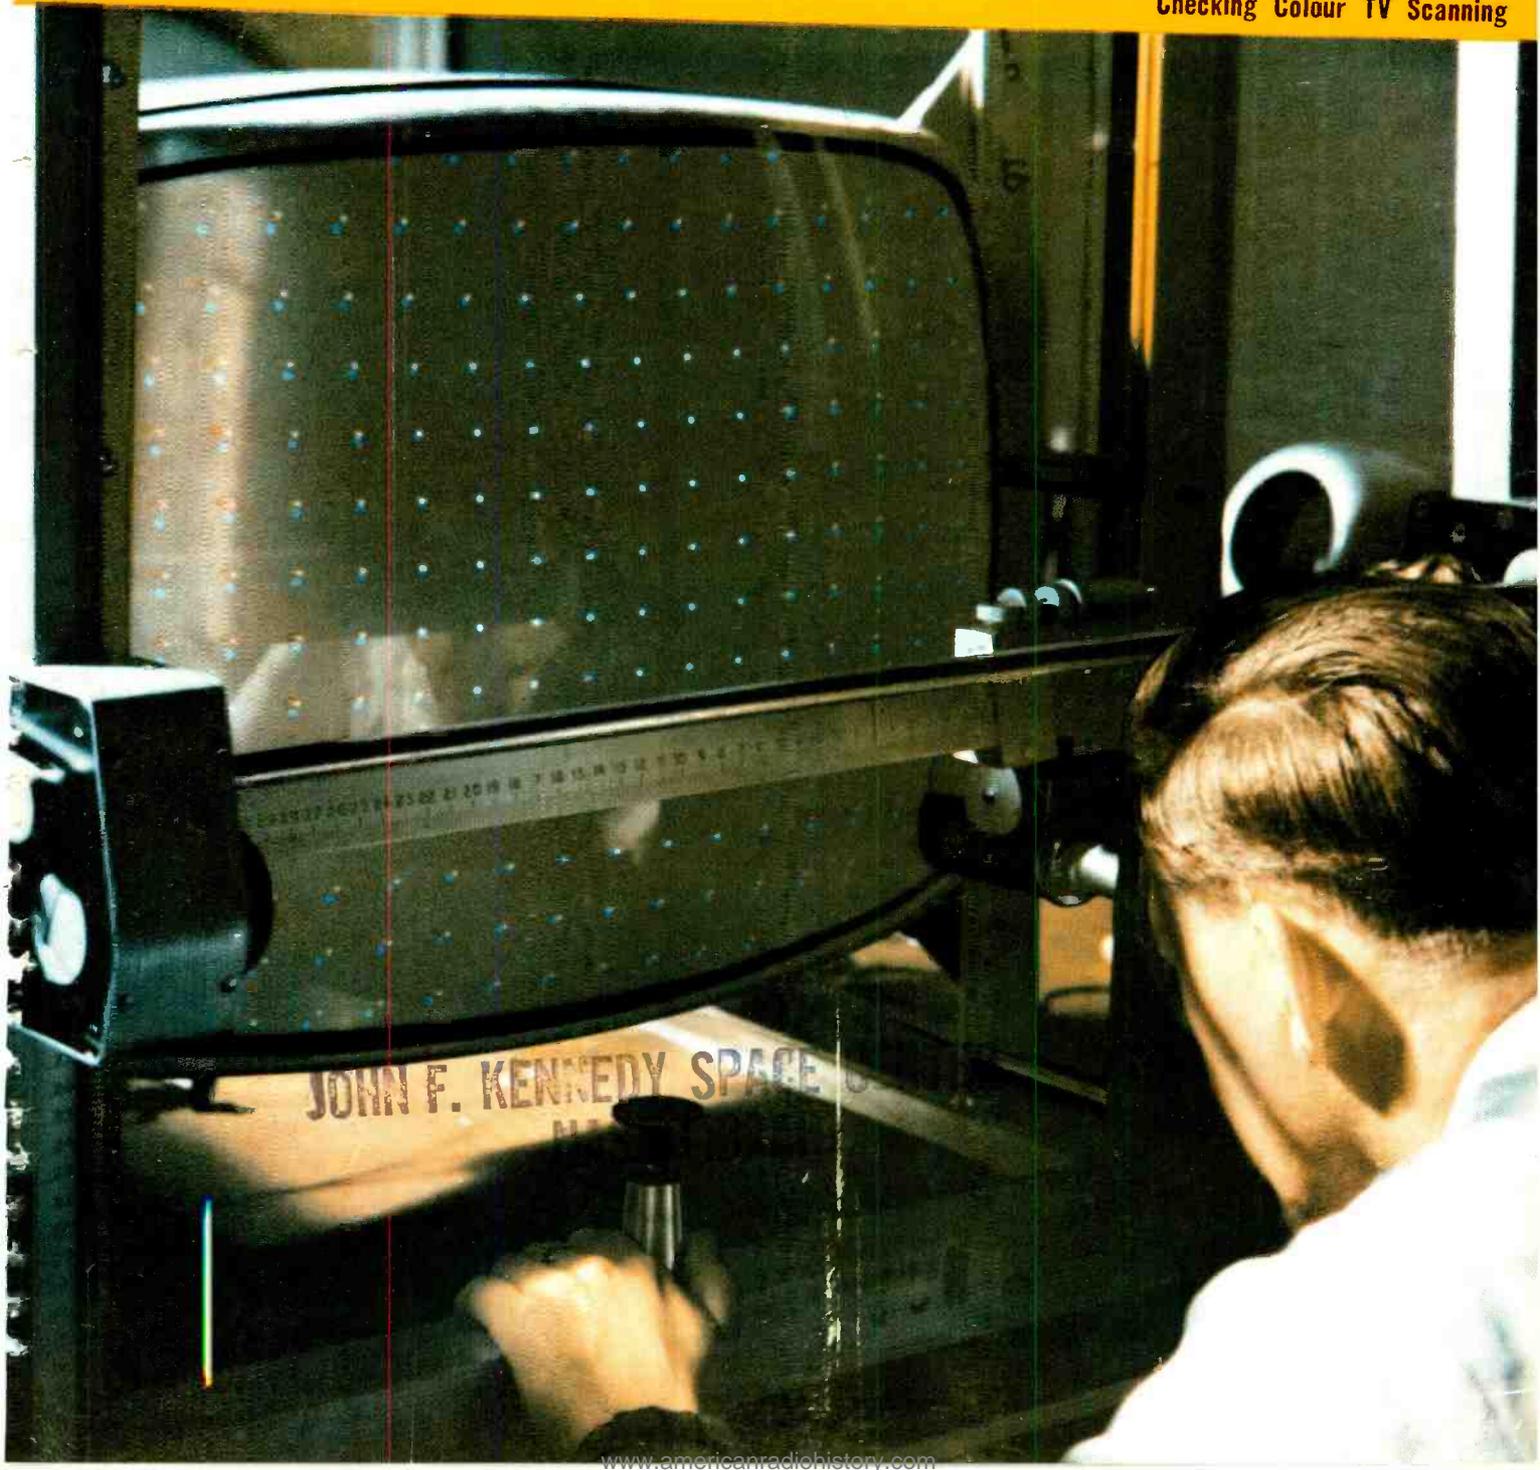

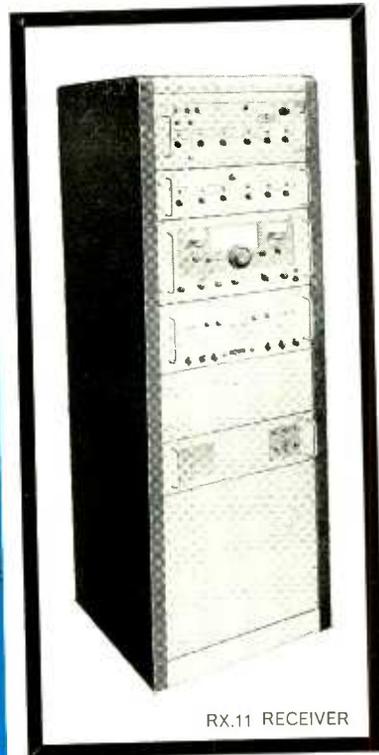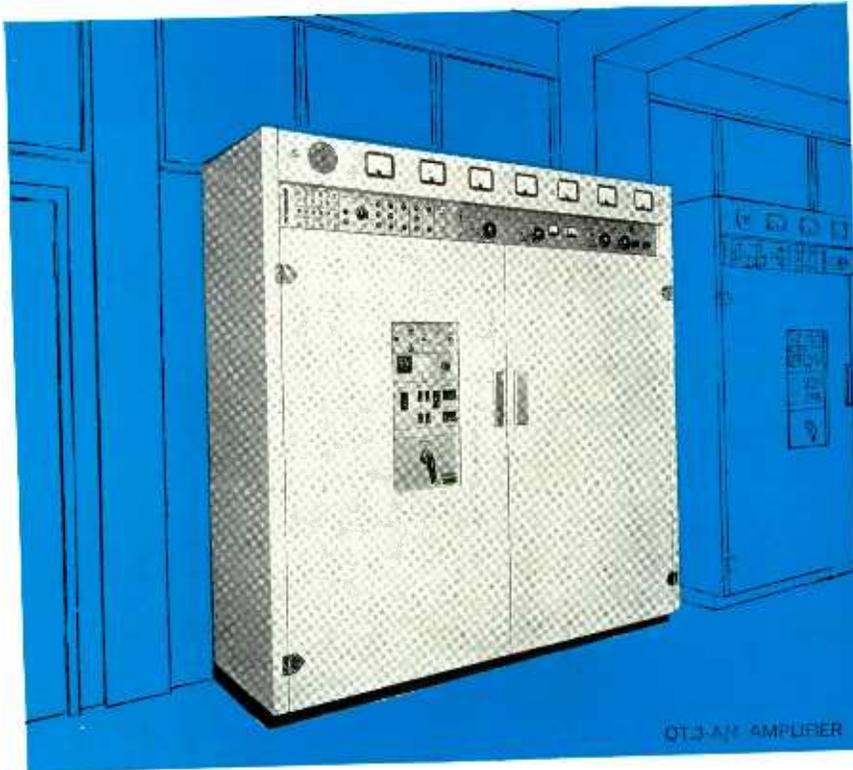

Complements in communications

In a modern radio link station all equipment must be to a uniformly high standard of quality. A transmitter with high stability synthesizer frequency control must be matched with an equally stable receiver. STC supplies HF equipment to this standard.

The QT.3-A/4 (7-10 kW) and QT.8-A (20-30 kW) are LSB, DSB and general purpose

linear amplifiers for telephony and single or multi-channel telegraphy.

The fully transistorized RX.11 receiver has a stability of 1 in 10^7 per week, and is held in tune to 1Hz by motorized a.f.c. Both transmitters and receiver have facilities for autotune with local or remote control.

All equipments, including ancillaries, are designed for

exceptional reliability and maintainability. Maximum ease of operation is combined with minimum need for servicing. For further details, write, phone or telex Standard Telephones and Cables Limited, Radio Division, Oakleigh Road, New Southgate, London N.11, England. Telephone ENTerprise 1234. Telex 261912.

STC

world-wide telecommunications and electronics

Wireless World

ELECTRONICS, TELEVISION, RADIO, AUDIO

MARCH 1967

Editor-in-chief:

W. T. COCKING, F.I.E.E.

Editor:

H. W. BARNARD

Technical Editor:

T. E. IVALL

Editorial:

B. S. CRANK

F. MILLS

G. B. SHORTER, B.Sc.

Drawing Office:

H. J. COOKE

Production:

D. R. BRAY

Advertisements:

G. BENTON ROWELL

(Manager)

J. R. EYTON-JONES

Iliffe Electrical Publications Ltd.,

Chairman: W. E. Miller,

M.A., M.I.E.R.E.

Managing Director:

Kenneth Tett

Dorset House, Stamford Street,

London, S.E.1

© Iliffe Electrical Publications Ltd., 1967. Permission in writing from the Editor must first be obtained before letterpress or illustrations are reproduced from this journal. Brief extracts or comments are allowed provided acknowledgement to the journal is given.

VOLUME 73 No. 3

PRICE: 3s.

FIFTY-SIXTH YEAR
OF PUBLICATION

- 105 The Wisdom of the Specialist
106 A Million Spots Before Your Eyes *by T. D. Towers*
114 Amateur S.S.B. Transmitter *by C. J. Salvage*
119 Trojan Relays *by J. Strong*
122 Design of Schmitt Trigger Circuits *by A. E. Crump*
132 Tracking Russian Satellites *by G. E. Perry*
135 Point-to-Point Review, 1966 *by D. Wilkinson*
136 Common-Frequency Radio Relaying *by J. R. Brinkley*
143 Battery Eliminator for Transistor Receivers *by R. F. Cook*

SHORT ITEMS

- 111 Lithium Tantalate Optical Modulators
112 Communal Broadcasting Service
131 Travelling-Field Function Generators
131 Bio-Engineering Show
149 Public Address Show

REGULAR FEATURES

- | | |
|-------------------------------------|------------------------------------|
| 105 Editorial Comment | 134 Books Received |
| 112 World of Wireless | 138 Letters to the Editor |
| 127 H.F. Predictions | 144 New Products |
| 128 Personalities | 149 Literature Received |
| 130 News from Industry | 150 March Meetings |
| 134 March Conferences & Exhibitions | 152 Real and Imaginary by "Vector" |

PUBLISHED MONTHLY (3rd Monday of preceding month). Telephone: Waterloo 3333 (70 lines), Telegrams/Telex: Wiworld Iliffepres 25137 London. Cables: "Ethaworld, London, S.E.1." Annual Subscriptions: Home: £2 6s 0d. Overseas: £2 15s 0d. Canada and U.S.A.: \$8.00. Second-class mail privileges authorised at New York N.Y. BRANCH OFFICES: BIRMINGHAM: 401, Lynton House, Walsall Road, 22b. Telephone: Birchfields 4838. BRISTOL: 11, Marsh Street, 1. Telephone: Bristol 21491/2. COVENTRY: 8-10, Corporation Street. Telephone: Coventry 25210. GLASGOW: 123, Hope Street, C.2. Telephone: Central 1265-6. MANCHESTER: 260, Deansgate, 3. Telephone: Blackfriars 4412. NEW YORK OFFICE U.S.A.: 300 East 42nd Street, New York 10017. Telephone: 867-3900.

low priced silicon planar devices

READILY AVAILABLE
IN LARGE
QUANTITIES!

BRIMAR

Miniature Silicon Planar Switching Diodes

High-speed switching, low-capacity diodes for computer and general industrial applications.

1N4148
1N4154

ACTUAL SIZE

Silicon NPN Planar Epoxy Transistors

Low-noise pre-amplifiers.

2N3391A
BC150

General purpose DC and low frequency amplifiers and oscillators.



2N3391
2N3393
2N3394
2N2923
2N2924
2N2925
2N2926
BC151

Silicon NPN Planar Epitaxial Epoxy Transistors

Audio and relay driver applications and switching circuits.

$V_{CE0 \text{ max}}$ from 25 to 50V.

2N3402
2N3404
2N3414
2N3416
BC152
BC175
BC180



VHF/RF types suitable for entertainment and communications AM or FM receivers.

BF216
BF217
BF218
BF219
BF220

Brimar can offer immediate delivery of a range of Silicon Planar Devices – produced for the first time in Great Britain in their new Silicon Planar plant at Brimsdown. The range includes transistors and diodes suitable for industrial and electronics applications. Thyristors are also available. Made to uncompromising standards, they are readily available in large quantities at the keenest prices. Ask for technical details and descriptive literature. Manufacturers' enquiries only, please – to:



TA5604

Thorn - A.E.I. Radio Valves & Tubes Limited

7 Soho Square, London W.1. Telephone: GERrard 5233

WW-106 FOR FURTHER DETAILS

Wireless World

ELECTRONICS, TELEVISION, RADIO, AUDIO

The Wisdom of the Specialist

WHAT are we to do about specialization? The problem is particularly acute in electronics, with its exponential rate of development. The danger is, of course, that the individual specialists (as represented, for example, by the professional groups of the institutions) are becoming so isolated from each other that communication between them may break down altogether. Then there is the law of diminishing returns from their efforts, expressed by the cynical old adage: "a specialist is a man who learns more and more about less and less until he ends by knowing everything about nothing." But we must have people working at the frontiers. Specialization is the price we have to pay for excellence.

Fortunately there are several negative-feedback mechanisms opposing the gain in specialization. Advanced techniques tend to become absorbed in general practice and eventually are superseded by others. The people working on them consequently have to shift their ground—or perhaps move to entirely different fields if economic pressure is severe enough—and so, by force of circumstances, broaden their knowledge. At the same time the natural tendency of the human mind to categorize new knowledge and form generalizations ensures that the *theory* arising from a new technique becomes integrated with an existing body of theory. Then, by the nature of engineering it is often necessary for specialists to work together on the building of a system. The communication barriers are broken down by the sheer necessity of making the thing work.

Systems engineering could, in fact, be the means of building bridges between the different islands of technology. It would be nice to think that systems theory (engineering theory independent of particular kinds of hardware) is doing this already. But, ironically, systems theory has itself become the province of specialists of the most exclusive kind—academics and like-minded people who get intellectual satisfaction in creating for themselves closed little worlds of pure abstraction by cleansing engineering techniques from the contamination of the crude business of making things work. Control theory and network theory are two notorious examples. In such circumstances systems studies are not likely to be very successful in achieving integration. However, one lives in hope.

The educational world is, of course, very much aware of the problems of specialization. Unfortunately educationists seem to be tackling it in a way which goes against human experience and is therefore unlikely to be successful. They take the view that the student ought to have a broad basic training in principles common to all engineering before he becomes a specialist, so that he will be well equipped to cope with any situations he may have to face in the future—hence the C.E.I.'s common examination for membership of its 13 constituent institutions. But how much of this initial broad training will really stick? Human beings, from the moment they are born, acquire knowledge and wisdom by progressing in easy stages from the particular and concrete (e.g. how to get food and comfort) to the general and abstract (e.g. studying philosophy). If you try to teach them general principles before you have given them a multitude of practical examples—try to put the wisdom before the knowledge—you will get nowhere.

The intelligent electronics specialist discovers with delight that he can use the narrow but familiar concepts of his own field as analogies to help him understand more general phenomena in physics and mechanics. Such flashes of insight, in which one suddenly becomes aware of relationships between different worlds, are the stuff of which true education is made. It is this knowledge possessed by the mature specialist which provides one of the richest soils for developing the wisdom that is supposed to characterize the complete engineer. Perhaps one day our educators will find the means for developing it. Meanwhile the specialists must continue, officially, as specialists.

VOL 73 NO 3
MARCH 1967

WIRELESS WORLD, MARCH 1967

105

Colour Receiver Techniques—3

A Million Spots Before Your Eyes

A LOOK AT THE PICTURE TUBE IN A MODERN COLOUR TELEVISION RECEIVER
TO SEE HOW IT WORKS AND HOW IT IS DRIVEN BY THE RECEIVER ITSELF

By T. D. TOWERS*, M.B.E.

SINCE J. L. Baird set up his first flickering colour-television demonstration in 1928, many forms of display have been proposed but only one has achieved common commercial use. This in the "shadow-mask" cathode-ray tube to be described below. If you are interested in the other types, you will find a full account in "Fundamentals of Display Systems" by H. H. Poole, Macmillan, 1966.

You can get an idea of what the colour tube in a

commercial receiver looks like from Fig. 1. A typical modern commercial tube on its own is shown in Fig. 1 (a) while in Fig. 1 (b) it appears fitted with the various accessories that will be mounted on it in the receiver.

Fig. 2 illustrates the principles on which this type of tube operates. Basically, as Fig. 2 (a) shows, three electron guns in the tube neck fire separate electron beams towards a phosphor coating on the inside of the front glass screen. (Many will recognise this as a refinement of the monochrome picture tube where a single gun fires a single beam towards the screen). Between the three guns and the screen lies a perforated metal screen with a regular pattern of holes in it. This screen is called a "shadow mask"—which gives rise to the name applied to this type of tube. Now, in a black-and-white television tube the inside of the screen is coated with a single continuous film of phosphor which glows "white" when struck by the electron beam. In the colour tube, on the other hand, three separate phosphors are used which, when struck by an electron beam, give rise to red, green and blue light respectively. These phosphors are not coated evenly over the screen, but are arranged in a mosaic of discrete dots, with one red, one green and one blue dot opposite each hole in the shadow mask.

The three guns in the colour tube are arranged so that their electron beams, as they sweep across the screen to produce the picture display, all converge on the holes in the shadow mask. Opposite each hole in the mask three separate phosphor dots (to glow red, green and blue) are deposited on the screen. As the three beams pass through a hole in the mask, they separate again as shown in Fig. 2 (a) and each falls on its corresponding phosphor dot. Thus one gun called the "red" gun activates all the "red" dots; another, the "green" gun, all the "green" dots; and the third, the "blue" gun, all the "blue" dots.

Fig. 2 (b) shows the shadow-mask and phosphor-dot screen arrangement

*Newmarket Transistors Ltd.

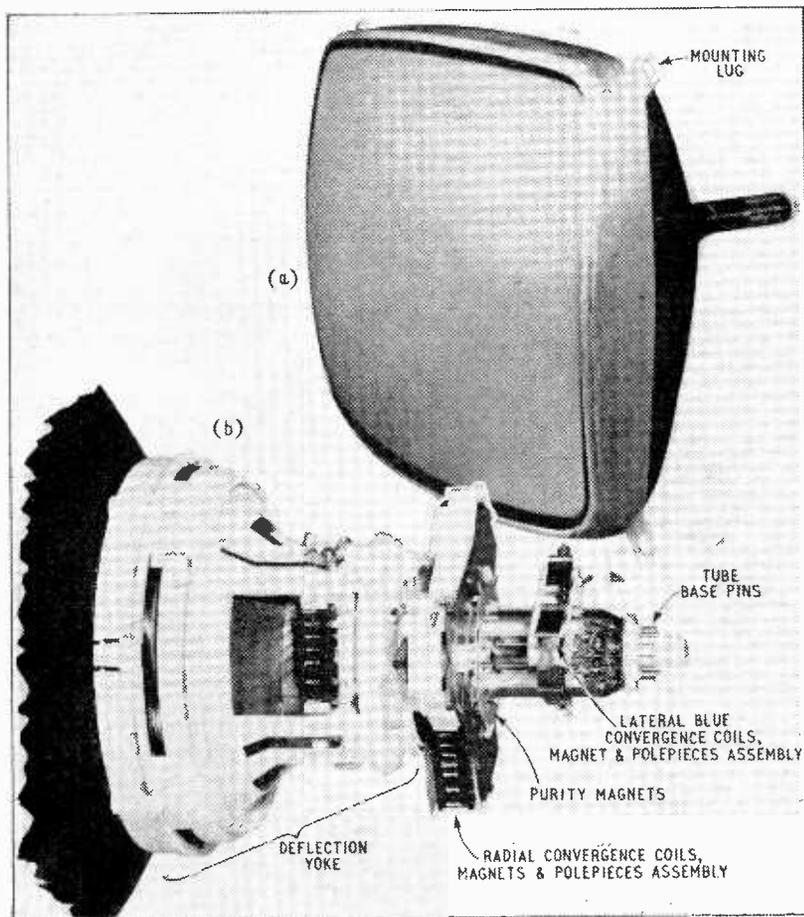


Fig. 1. Typical modern 25-in colour television receiver tube (Mullard A63-11X): (a) tube alone; (b) neck of tube complete with associated coils and other fittings.

in more detail, illustrating the regular cluster of three phosphor dots lined up with each hole in the shadow mask. The diagram shows the beams as being thin enough to pass through only one hole, but in practice the electron beams will cover about five holes of the shadow mask and activate the corresponding five triads of phosphor dots.

You can get an idea of the number and size of the phosphor dots from the mask hole spacings used. In a typical 25in tube, the mask holes are spaced on a 0.75mm grid, i.e. 0.030in apart. This means that the phosphor dots are about 0.010 inch in diameter and almost touching one another. With a usable screen area of about 20in \times 15½in as in a 25in tube, this gives rise to about one-third of a million each of red, green and blue dots. Now you can see the explanation of the cryptic title of this article. (With a 19in tube, mask holes are spaced 0.025in apart, giving rise again to a million phosphor dots on the useful screen area of about 16in \times 12½in).

When not activated by the electron beams, the phosphor dots all have the same creamy appearance as the phosphor on a monochrome tube. Thus it is not easy to distinguish a colour tube just by looking at it from a distance when the receiver is switched off. Close up, however, you can see the dot grain structure.

As the holes in the shadow mask represent only about 25% of the mask area, only a quarter of the electrons from each gun reach the screen. The three guns together therefore have about 75% (= 3 \times 25%) beam transmission as compared with a single-gun monochrome tube. This is compensated for by working at a higher e.h.t. voltage, but it gives rise to a problem of heat dissipation not found in the monochrome tube. As the mask absorbs so many electrons, it gets hot. Out of a typical mean beam current of 1mA in total from the three guns, the mask captures ¾mA, which with the 25kV e.h.t. commonly used is converted to about 20W heat dissipation.

In the next section we shall go on to give some details of the structure of the modern shadow-mask colour tube, but at this point you should note that these tubes currently use electromagnetic deflection and electrostatic focusing, as in black-and-white practice. In the colour tube, however, the need to ensure that the three beams converge on the correct phosphor dots calls for an additional "convergence" arrangement using a combination of dynamic electromagnetic and static magnetic deflection.

TYPICAL MODERN COLOUR TELEVISION TUBE

Fig. 3 illustrates diagrammatically the main constructional features of a modern colour television tube. A triple-gun assembly in the neck can be seen firing three separate beams of electrons towards the shadow-mask. After they pass through the mask, the electrons activate the array of red, green and blue phosphor dots on the inside of the front glass screen.

The screen is rectangular and of approximately 4 : 3 aspect ratio. Earlier colour TV sets used a 21in diameter round-faced tube, but the modern trend is towards rectangular tubes.

In the U.S.A. and Japan, a variety of rectangular tubes have been used, with diameters varying from 6in through 9in, 11in, 15in, 19in, 23in up to 25in. In the U.K. indications are that, initially at least, only two tubes will be popular: a 25in (21in \times 15½in), such as the Mullard A63-11X or Thorn-AEI V3508A, and a 19in (16in \times 12½in), such as the A49-11X or V3509A.

Different phosphors are used for the screen dots. The green and blue are normally zinc cadmium sulphide, silver activated and recently the red phosphor has tended to be a rare earth such as yttrium orthovanadate, euro-

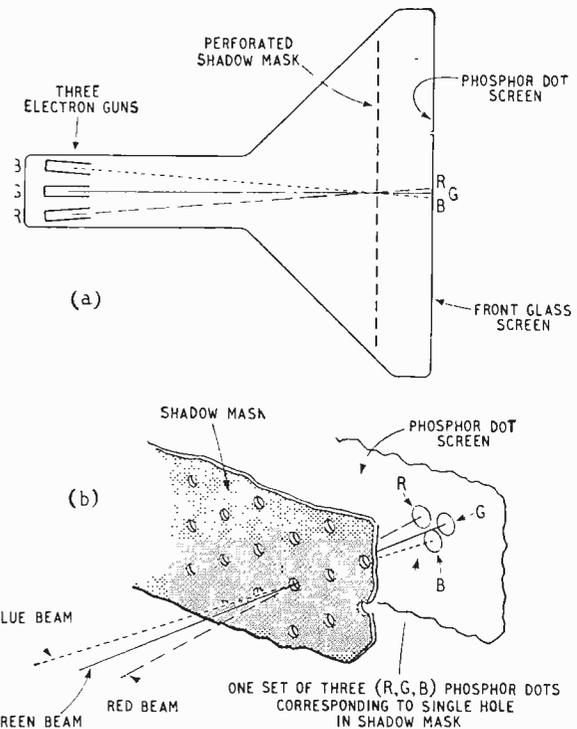


Fig. 2. Simplified diagram showing principle of operation of shadow mask in three-gun colour tube: (a) beams from three "colour" guns converging on shadow mask and diverging to screen; (b) close-up of shadow mask and screen.

pium activated. The phosphor screen is aluminised as in monochrome tubes, thus making it possible to dispense with ion traps in the electron guns. The tubes are fitted with special rim-bands, making them implosion proof. For the screen cerium-oxide type glass is used, eliminating the discoloration that is caused in ordinary glass from the X-rays arising from the 25kV e.h.t.

The shadow mask itself is 0.006in thick steel, mounted about 0.6in from the phosphor screen. As it gets hot in use, it is mounted so that it does not buckle, and as it expands, moves along the line of the electron beams so that the hole alignment with the screen phosphor dots is not impaired.

Modern colour tubes are compact "ninety-degree" type. This means a 90° deflection from one corner of the screen to the diagonally opposite corner (about 80° horizontally and 60° vertically). This wide angle makes possible a short tube about the same overall length as the screen width. The first generation, round-faced colour tubes, being only 70° deflection, were relatively much longer.

The neck diameter of these second-generation rectangular tubes is about 37 mm (just under 1½in) as compared with the 2in diameter common with the old round 21in tube. The importance of this lies in the lower deflection power possible with the narrower neck, round which deflection coils can be closer to the electron beams.

Other significant external features of the shadow-mask tube can also be seen in Fig. 3(a). A metal band at the front round the screen is fitted with mounting lugs and serves to support the tube (which weighs a not inconsiderable 38 lb or so on its own). An external "aqua-

dag" conductive coating on the outside of the tube flare forms a capacitor with the final anode coating on the inside of the glass.

Except for e.h.t., electrical connections to the tube are via pins at the end of the tube neck, which are internally connected to the guns, oriented in the neck as shown in Fig. 3(a). The tube is operated with the blue gun uppermost. The guns are of identical construction as illustrated in detail in Fig. 3(b) for the blue gun. Electrons emitted from the cathode *k* (with internal heater *h-h*) pass through control grid *g*, and are focused by the first anode *a₁*. They then pass through the accelerating second anode *a₂* (common to all guns) to the commoned final anodes *a₃* and *a₄*. Note that *a₃* and *a₄* are internally connected together and to the shadow-mask and screen. (It is worth noting also that, in American practice, *g* is known as *g₁*, *a₁* as *g₂*, *a₂* as *g₃*, and *a₃*, *a₄* as "final anode".)

Apart from the various electrodes indicated, the guns also include metal polepieces to be aligned with external coil and static magnet assemblies for adjusting beam convergence at the shadow-mask. Fig. 3(b) shows how these

convergence polepieces are positioned in a single gun.

Fig. 3(c) gives in a tube cross-section some detail of the blue lateral convergence arrangement. Only one external magnetic assembly is used and this controls the lateral position of the blue beam.

Fig. 3(d) gives more detail of the internal radial convergence polepieces in a cross-section of the complete tube neck covering all three guns. Varying the external magnet field moves the electron beams in and out from the tube axis. A separate external magnet assembly is associated with each of the three beams.

VOLTAGES APPLIED TO COLOUR TUBE

As mentioned earlier, except for the e.h.t. which is applied to a stud on the tube flare, voltage connections are made via pins at the end of the tube neck. Fig. 4(a) shows the B14G-JEDEC B12-244 standard 14-pin base currently used, with the separate stud connection for *a_{3,4}*. One significant point about the electrode connections that should be noted is that pin 9, taking about 5kV to *a₂*, has two blank pins on either side for safety isolation. This is the only e.h.t. connection to the base pins.

Fig. 4(b) shows how the various internal electrodes in the three guns connect with the base pins and e.h.t. stud. It also shows typical bias and signal voltages to be expected at the various electrode pins.

The three tube guns have separate cathode heaters, brought out to one pair of base pins. Fig. 4(b) shows them in series for ease of illustration, but they are usually paralleled in practice, and require 6.3V a.c. Total heater current varies with different makes from 0.9 to 1.3A.

The three separate cathodes—*k_G*, *k_B*, and *k_R*—in Fig. 4 each have in use a d.c. potential of about +250V with respect to ground. They are usually d.c.-coupled to the luminance (video) output valve anode, whose mean d.c. voltage is controlled by a brightness potentiometer in its grid stage. This luminance output valve also supplies to the tube cathodes a 5Mc/s wideband a.c. signal up to 130V peak-to-peak. The design of the luminance drive to the tube must take into account that the stray capacitance of the cathodes total about 15pF.

The three control grids—*g_B*, *g_G*, and *g_R*—in Fig. 4 receive 1Mc/s wideband a.c. signals, up to 180V peak-to-peak, from the colour-difference output valves. These signals are superimposed on d.c. bias voltages of around 150V applied directly to the control grids from preset potentiometers. Each grid has a stray capacitance of around 7pF, and the external circuit resistance from any grid to its cathode must be kept to less than 750kΩ.

The first "accelerating" anodes—*a_{1B}*, *a_{1G}*, and *a_{1R}*—have separate preset d.c. bias voltages of around 300-500V applied to them. Each anode has a typical stray capacitance of 7pF.

In Fig. 4 you will see the second anodes, *a₂*, of the three guns are internally connected together. A preset d.c. voltage of about 4.5kV applied to the *a₂* pin provides

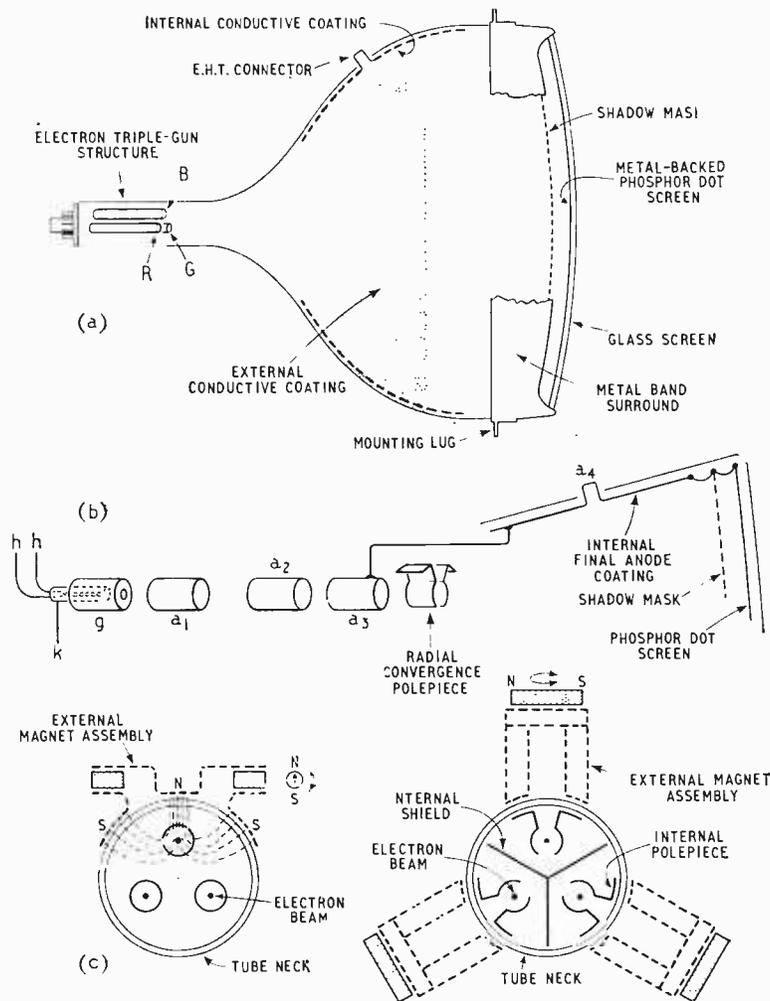


Fig. 3. Simplified diagram of the internal elements of a colour tube: (a) overall sketch; (b) exploded diagram of blue gun as typical of each of three guns; (c) blue lateral convergence assembly in cross section diagram of tube; (d) radial convergence polepieces also in cross section.

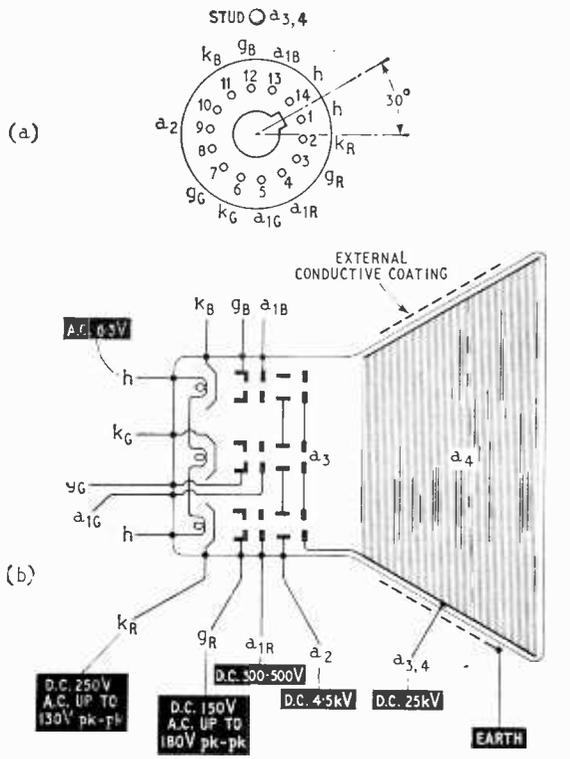


Fig. 4. How voltages are applied to colour television tube: (a) diagram of tube base showing identification of pins; (b) tube electrodes with typical applied voltages, a.c. and d.c.

a single focusing control for all three beams. This second anode voltage usually lies at between 17 and 20% of the final anode voltage, and the tube design requires that the external circuit resistance from a₂ to k does not exceed 7.5M.Ω

The final anode, a_{3,4}, in Fig. 4(b) comprises three anodes a₃, commoned in the gun assembly, internally connected to a conductive coating on the inside of the tube flare and to the shadow-mask and phosphor screen. The external electrical connection is via a stud through the glass on the flare to the 25kV d.c. e.h.t. supply. The a₄ internal conductive coating forms a capacitance of 2,000pF through the glass with the external conductive coating. By earthing the external coating, this capacitance can be used to smooth the e.h.t. supply.

CURRENTS APPLIED TO COLOUR TUBE

Currents applied to coils around the colour tube neck are used to control beam deflection and convergence. Normally three separate adjustable coil assemblies for deflection (scan), radial convergence and blue lateral convergence are used, in overall appearance and location somewhat like the sketch in Fig. 5(a).

Reduced to essentials, the component coils lie around the tube neck as shown in Fig. 5(b). In the deflection yoke, the field coils are positioned vertically and receive sawtooth sweep currents from the field timebase and adjustable d.c. from the preset vertical shift control. The line coils in the yoke lie horizontally and receive from the line timebase a sawtooth a.c. drive and adjustable d.c.

from the horizontal shift control of the receiver.

The coil orientations in the radial convergence yoke can also be seen in Fig. 5(b). Each gun has associated with it a pair of coils with magnetic field axes tangential to the tube cross-section, i.e. at right angles to the electron beams. The coils in each pair receive parabolic convergence-correcting currents, one from the field and the other from the line timebase.

Finally in Fig. 5(b) will be seen the basic arrangement of the separate blue lateral convergence coil, whose axial field points vertically downwards directly into the blue electron beam. This coil receives a parabolic current from the line timebase only.

In the three sets of coil assemblies described, the deflection yoke sweeps the three electron beams in unison over the screen; the radial convergence yoke adds compensating deflections to each beam separately away from the screen centre to keep the three converging properly at the mask holes all over; finally the blue convergence yoke adds horizontal compensating deflections away from the screen centre to provide special additional corrections for the blue beam on its own.

STATIC MAGNETIC FIELDS APPLIED TO TUBE

In the scan deflection system, it was noted above that d.c. shift was achieved by direct currents in the deflection yoke coils. In the convergence system, however, "d.c.

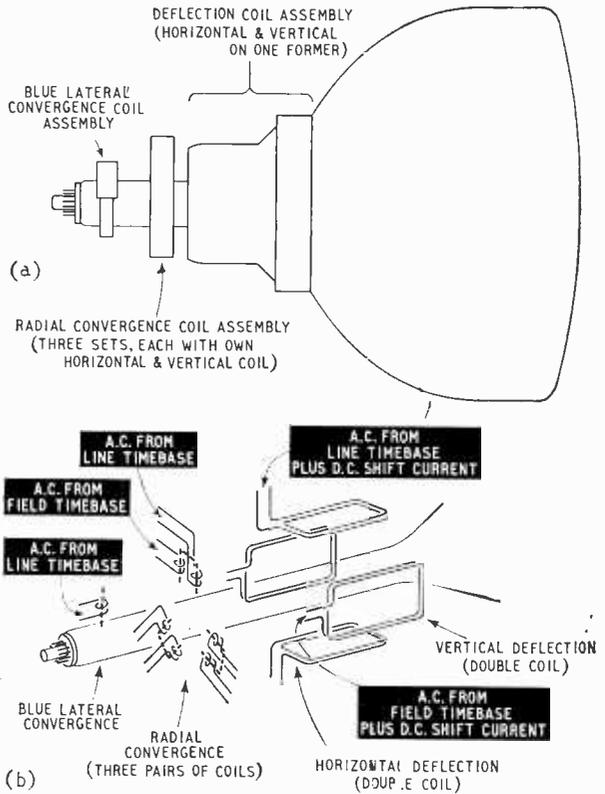


Fig. 5. How currents are applied to colour television tube: (a) outline sketch of coil assemblies through which control currents are passed; (b) diagrammatic representation of tube coils with applied currents, a.c. and d.c.

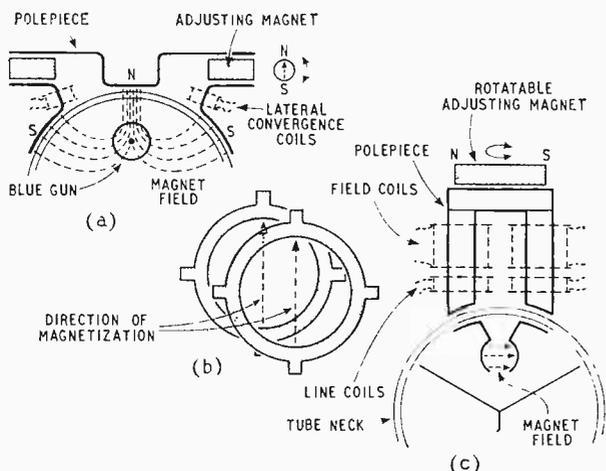


Fig. 6. Permanent magnets used to control electron beams in colour tube: (a) blue lateral convergence magnet details; (b) purity magnet details; (c) radial convergence magnet details (one gun out of three).

shift," i.e. adjustment of the initial settings of each of the three beams at the screen centre, is by means of adjustable permanent magnets around the tube neck. These magnets fall into three main sets, as indicated diagrammatically in Fig. 7. Before we consider these, it should be remembered that the earth's magnetic field also affects the beams. For this reason, the tube is always operated with the axis horizontal. In addition, the blue gun is always arranged on top, because the blue image has least luminance and produces least visual distress when it is in error. With the red and green guns symmetrically underneath, they have similar convergence errors which can be most effectively compensated in a symmetrical arrangement. To reduce the spurious effects of stray ambient magnetic fields, an additional precaution is the magnetic metal shell which covers the tube from near the neck up to the screen, also indicated in Fig. 7.

Starting in Fig. 7 with the blue convergence magnet nearest the tube base, you find this magnet arranged so that its field points directly into the tube axis, and affects the blue beam only. In practice, it is an integral part of the blue lateral convergence coil assembly. Fig. 6(a) shows a typical arrangement in cross section across the tube. Adjustable magnets in sleeves act on fixed polepieces to produce a presettable magnetic field radially in towards the tube axis through the blue beam. Shifting the adjustable magnets varies the strength of the magnetic field through the electron beam and shifts the blue beam horizontally.

The second "purity" magnet assembly in the middle in Fig. 7 is in effect a magnet which can be shifted round the tube neck to produce a field of preset strength in any direction at right angles to the tube axis. This field acts on all three beams simultaneously. The arrangement is called the purity magnet because it is used to line up the beams at the centre of the screen so that when they pass through the mask hole they each fall on their correct colour phosphor dot. This ensures that the corresponding colours are "pure"; e.g. the red beam activates only the red phosphor dots. The purity magnet assembly usually takes the form of two rings as in Fig. 6(b), magnetized along a diameter. By offsetting one from the other, their fields can be made to aid or oppose each other, so that the overall field strength inside the tube neck can be varied. Also, by rotating the two magnets

together round the neck, the direction of the field can be varied. This makes it possible to shift the three beams together radially and tangentially, to the required trajectory for colour purity.

The third permanent magnet assembly in Fig. 7 comprises three "radial convergence" magnets shown ideally located round the tube neck nearest the screen. These are arranged with the help of polepieces inside the tube so that each magnet affects only one beam. In any one beam the magnetic field acts at right angles to the beam and to the radius on which the beam lies from the tube axis. As a result, if the strength of the field is varied, the beam is shifted radially out or in from the axis. This enables each beam to be controlled independently to ensure that they all converge exactly at the shadow-mask. Away from the screen centre, it will be remembered, convergence at the mask is further ensured by the radial convergence coils described earlier. The radial convergence magnets, therefore, not unexpectedly, are found combined physically with the radial convergence coils in a single assembly. Fig. 3(d) earlier gave an outline of the complete assembly. Now in Fig. 6(c) you can see fuller details of the arrangement for one gun. An adjustable permanent magnet is incorporated in the core of the convergence coil assembly which acts through internal polepieces to produce a transverse field to displace the electron beam radially. By rotating the magnet, its effective strength is varied and the beam can be shifted in or out from the tube axis. In practice, the radial convergence magnets are used for separate adjustment to make the three beams converge at the screen centre.

Colour purity can be rather easily upset by stray magnetic fields. For this reason, it is necessary, before adjusting convergence and purity magnets, to "degauss" or demagnetize the tube. This is done by saturating the whole assembly of coils, magnets and screens with an a.c. magnetic field which is gradually reduced to zero. Practically, this is done with a large coil of wire, energized from the mains, which is moved about near the tube and then slowly withdrawn to a distance.

COLOUR TUBE COMPLETE ASSEMBLY

We have discussed individually the various accessories to the colour tube proper. Fig. 7 is designed to show how all these fit together. It gives a composite silhouette sketch diagram of a complete colour television cathode-ray tube as installed in the receiver. Mounting lugs, attached to the metal band round the tube just behind the screen, support the tube. Behind the metal band, a metal screen magnetically shields much of the tube flare, and on the flare itself you can see the final anode connection stud contact. Working along the neck from the screen you come first to the deflection yoke, then the radial convergence assembly of coils and magnets. Next comes the double purity magnet followed by the blue lateral convergence assembly, just in front of the tube

OUR COVER

Our cover picture shows an engineer examining through a microscope the degree of convergence inaccuracy on a shadow-mask colour tube caused by a test scanning coil assembly. He is working in the Wound Components Division of the Plessey Components Group, Titchfield, Hants, where deflection, convergence and other assemblies for colour television receivers are being developed

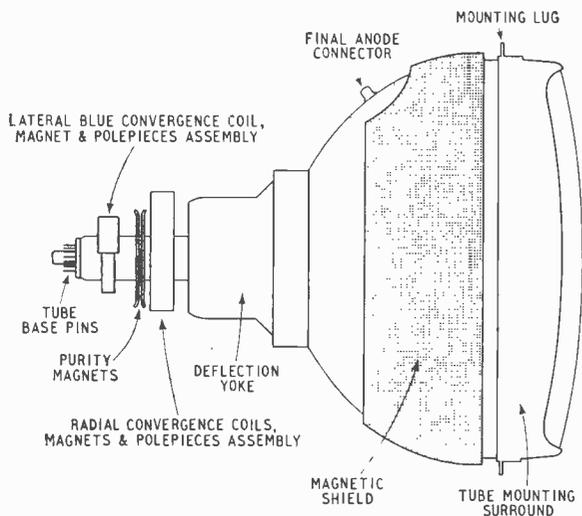


Fig. 7. Composite sketch diagram of complete colour television cathode-ray tube as installed in receiver with all fittings attached.

base. (This is current British practice, but overseas the purity magnet may be found behind the blue convergence assembly next to the tube base.)

As colour tubes operate with an e.h.t. of around 25kV, and X-radiation can arise when electrons are accelerated

by a potential of more than about 16kV, the tube and its associated e.h.t. rectifier and stabilizer valves are sources of possibly dangerous X-rays. However, the modern tube with its integral implosion-guard and screen reduces the X-ray level at the front surface of the glass to the safe level of below $\frac{1}{2}$ mR/hr. If you have occasion to work inside a set around a colour tube, be most careful to replace all screens around the e.h.t. supply section before switching on.

Flashover between tube electrodes is a greater danger with the 25kV e.h.t. used for colour tubes than with lower e.h.t. voltage monochrome tubes, and much more attention is paid to this feature in colour tube design and servicing procedures.

Anyone who knows the details of a black-and-white tube must realize by now that a colour tube must be a much more costly item to produce, and this is one of the main reasons why, for the present at least, colour receivers must be much more expensive than monochrome sets to the same general specification.

Much research is going on into colour picture tubes other than the shadow-mask type, but at the time of writing none is capable of producing acceptable colour pictures, and it seems that the direct viewing, three-gun shadow-mask type will carry the brunt of commercial television for a long time to come.

Corrections.—In Fig. 4(a) in the February issue (p. 65) the delay line in the luminance section should be shown as $1\mu\text{sec}$, not $64\mu\text{sec}$. On pp. 63-44 the vision i.f. should be 39.50Mc/s .


LITHIUM TANTALATE OPTICAL MODULATORS

ONE of the most efficient light modulators to be known so far relies on the Pockels electro-optic effect (similar to the Kerr effect but applicable to crystals instead of liquids) and has been developed for use with p.c.m. by Bell Telephone Labs. The high-speed optical gate consists of a thin rod of lithium tantalate. Previously, KDP (potassium di-hydrogen phosphate) crystals have been the most frequently used electro-optic material.

To produce 100% modulation, only 1/20 of the power required by KDP is needed, which can conveniently be supplied from a transistor pulse amplifier. Such would require only 10 mW of power giving a drive voltage of 30 V across about 5 pF (for 100% modulation).

The plane of polarization of light pulses (from a helium-neon laser) passing through the crystal is rotated by 90° in the presence of an electrical pulse, allowing light to pass through an analyser to the transmission medium (the light would have previously passed through a polarizer).

The width of the pulses from the helium-neon laser allows four pulses to be inserted during each p.c.m. pulse period, so the maximum potential speed of this optical system is 896 megabits/sec. (This bit-rate, corresponding to a bandwidth of 1.6 Gc/s is achieved using four modulators.)

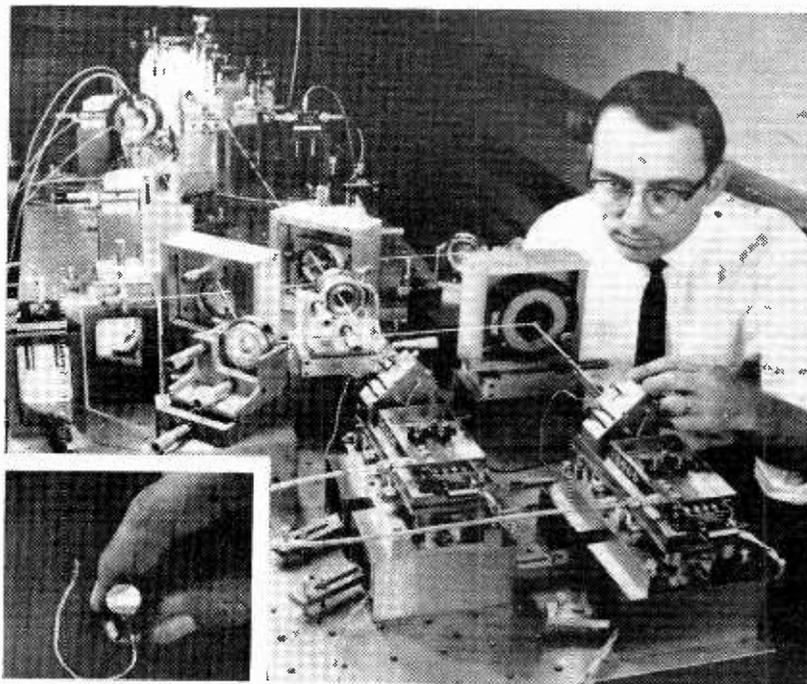

Two signals, pulse code modulated at a rate of 200 million bit/sec by lithium tantalate crystals, are produced by the modulators in the picture. A typical crystal on a copper heat sink is shown in the insert.

WORLD OF WIRELESS

Communal Broadcasting Service

THIS was the title the P.M.G. gave to the proposed v.h.f. local broadcasting service when he was speaking recently at the luncheon of the Radio Industries Club. He announced that about 100 towns had expressed interest in the experiment and that nine will be selected jointly by the B.B.C. and the P.M.G. himself. Three of these stations are to start broadcasting this year and the other six in 1968.


The Government White Paper on broadcasting proposed that these stations, to be provided by the B.B.C., should be operated by local authorities.

The only section of Band II that is so far not being used by the B.B.C. for its v.h.f. sound broadcasting service is that above 94.8 Mc/s, which is at present being used by the police and other civil services. In the Stockholm plan for v.h.f. broadcasting drawn up in 1952 there are allocations for about 140 local area broadcasting stations in this part of Band II. The British delegation to the Stockholm Conference obviously foresaw the need for utilizing the v.h.f. band for local broadcasting.

At the luncheon the P.M.G. called for the co-operation of manufacturers to produce "cheap v.h.f. transistor sets" for sale in the towns in which the experiment is to take place. According to figures he quoted it is estimated that the number of v.h.f. sets in use throughout the country is of the order of only 5M. We question the wisdom of producing a simple set for these local stations; would not the purchaser also want to listen to the existing three B.B.C. services on v.h.f.? If a cheap set is produced the advantages of f.m. will surely be nullified.

E.I.D. Apprentice School

AT the annual prizegiving for E.I.D. apprentices held on 6th January at the Electrical Inspection Directorate Headquarters, Bromley, Kent, it was stated that the number of apprentices now receiving full-time training was 161, and the intake target is now 60 boys per year. Educational requirements for acceptance as an apprentice are that the boy must be studying for G.C.E. "O" levels in mathematics, physics, English, and one other subject and be between 16 and 17 years of age. Although the normal apprenticeship period is four years for National Certificate or City and Guilds courses it is increased to five years where boys wish to complete H.N.D., or other advanced courses. Full electronic training, and basic mechanical engineering practice is given in the new school buildings at Bromley. The *Wireless World* oscilloscope in the photograph was constructed

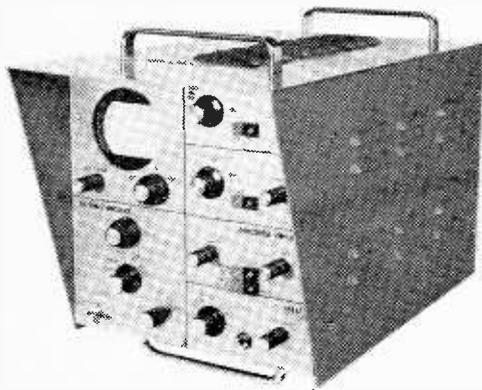

"Wireless World" oscilloscope as built by E.I.D. apprentices.

ted by E.I.D. apprentices. A calibration unit was added to the original design, giving a range of six calibrated square waves at a frequency of 1 kc/s, but with varying amplitudes. Other added features included extending the frequency response of the Y amplifier to 16 Mc/s.

No U.K. Citizens' Band

FOLLOWING recent statements deploring the unlicensed use of walkie-talkie transceivers, rumours of the G.P.O. considering an allocated U.K. citizens' waveband have no foundation say the Post Office. Using the experience accumulated by other countries who have found in such bands chaos often results, the G.P.O. add a further argument in support of their decision—that of interference. The instability of cheap imported transceivers can cause interference not only on their fundamental operating frequency if mistuned, but also on harmonics. The G.P.O. suggest that by using professional quality sets the purpose of a citizens' band would probably be defeated, the cost being prohibitive for the average citizen.

U.S. "Public Television"?

IN the U.S.A. a national commission has called for a non-commercial television service run by a government chartered corporation. The service, it was said by a member of the commission, would be encouraged "to rebel, criticize and to protest." The commission, which was financed by the Carnegie Corporation Philanthropic Organisation, predicted the system would eventually include 380 U.S. stations and suggested naming it "Public Television." The programmes they conceive to be of the essence of this public television service are in general not economic for commercial sponsorship. The proposed new service would be financed initially by a 2% tax and later by a 5% tax on sets.

Microwave Integrated Circuits, a new field of components technology primarily concerned with surfaces, is the subject of a three-year research programme just started at the University of Warwick's School of Engineering Science. The Science Research Council has provided a grant of £26,000 to assist the work, which will be directed by M. K. McPhun (formerly with Mullard Research Laboratories). Research will be concentrated on lumped components made in thin and thick films. At microwave frequencies this means that the components must be very small. Conventional thin-film techniques will be used, but dimensions will be of the same order as those in monolithic integrated circuits.

The three annual awards for apprentices made by the Telecommunication Engineering and Manufacturing Association were presented at the Association's annual dinner on February 7th. The recipients in the three different grades of apprenticeship, all of whom had submitted an essay on some aspect of their work or training, were A. G. Carter, B.Sc., graduate in training with G.E.C., for his paper "Digital communications systems"; C. W. Evans, B.Sc., student apprentice with Marconi ("Welding in microelectronics"); and Miss Trixie Dayer, technician apprentice at Standard Telecommunications Laboratories ("The preparation of a new semiconductor material for use in telecommunication devices").

Philips Electrical Ltd., are to hold two trade shows, one in Harrogate and the other in London, as the Earls Court, Radio and Television Show has been cancelled. The Northern show will be from 21st-24th August at the Majestic Hotel. The London show will be from 4th-14th September at the Royal Garden Hotel.

G.P.O. Vision-telephone Scheme.—The present greater regional development and the dispersal of industry leads the G.P.O. to expect a demand for new communication techniques. The Post Office are meeting this situation by exploring the possibilities of television links for conferences in two distant centres and also a vision telephone for calls between individuals in booths. Both facilities would make use of the existing coaxial cable network and the microwave radio system now being developed to operate between a nationwide network of towers, of which the 620-foot-high Post Office Tower in London will be the hub. The G.P.O. in the near future is to set up an experimental C.C.T.V. conference link between their Engineering Department headquarters in the City of London and the Research Station at Dollis Hill. Invitations are to be made to business men interested in the practical application of telephone vision conference facilities to take part in experimental, live conferences.

The National Electronics Research Council, of which Lord Mountbatten is chairman, is changing its name and role. Its new name is the **National Electronics Council**. The N.E.C. is to consider and advise the Government on the application of electronics to the national life. The N.E.C.'s new and wider function is to be under the aegis of the Ministry of Technology.

Tripartite Computer Project.—The object of a joint project by English Electric-Leo-Marconi Computers Ltd., the University of Edinburgh and the Ministry of Technology is to provide advanced software for the operation of a multi-access system computer ordered by the Edinburgh Regional Computing Centre. Twenty-five programmers are working on the project of which eleven have been provided by the University. The multi-access computer, to be delivered to the Edinburgh Regional Computing Centre in the summer of 1968, will initially be in the form of a system 4.70 computer and equipment delivered later will provide the multi-access facilities. Access to the computer will be by remote terminals located in offices throughout Edinburgh and as far away as Aberdeen. It is expected that it will have a build up of over 200 users, each with direct immediate access.

Tackling Clutter.—Using a Pegasus computer and an orthodox airfield control radar system, research workers from the University of Leeds hope to increase the accuracy of automatic aircraft radar detection. Each of the effects of clutter will be studied, these being due to the human, environmental and electronic factors. This work will complement research being undertaken in such Government departments as the Royal Radar Establishment.

B.S.I. Conference.—“The expansion of trade through standards, European co-operation, the change to the metric system, safety and reliability” are some of the subjects to be discussed at the British Standards Institution's thirteenth annual standards conference. It will be held at Imperial College, London, on April 13th and 14th.

Automation & Navigation.—A three-day conference, sponsored by the British, W. German, French and Italian institutes of navigation, will be held in Paris from April 26th to 28th. The conference, entitled “Automation as applied to the conduct of craft by sea and in the air,” will be open to members of the institutes and invited guests.

I.E.E.T.E. Educational Entry Requirements.—The Institution of Electrical and Electronics Technician Engineers have released particulars of the requirements for membership to the Institution after negotiating with a number of examination bodies. These particulars are given in full in the *Articles of Association* and summarized in the Institution's official brochure available from the secretary of the I.E.E.T.E., 26 Bloomsbury Square, London, W.C.1.

In the November, 1966, issue (p. 562) it was recorded that **stereophonic test transmissions** took place after the end of the normal B.B.C. Third Programme transmissions. This consisted of a left-channel signal of 250 c/s. The test schedule has now been extended to include right-channel signals (440 c/s). The schedule is as shown in the table. The signals are normally transmitted at a level corresponding to 40% of maximum modulation (before pre-emphasis). The stereo transmissions at the present time take place only on frequencies of 91.3 Mc/s (Wrotham) and 92.4 Mc/s (Dover).

Time	L	R
23.30	250 c/s	—
23.35	—	440 c/s
23.40	250 c/s (+8dB)	440 c/s (+8dB)
23.41	—	440 c/s (+8dB)
23.42	250 c/s (+8dB)	440 c/s (+8dB)
23.43	8 kc/s (—8dB)	—
23.45	—	8 kc/s (—8dB)
23.47	250 c/s	—
23.55	mono transmission	—

Receiving Licences.—In December combined television and sound licences in the U.K. totalled 13,919,191, a rise of 393,297 during the year. Sound only licences numbered 2,515,993, a fall of 165,162 during the year. Sound licences include those for receivers in cars which rose from 658,200 to 707,606.

Manchester University is receiving a grant of £45,000 from the Science Research Council towards the cost of a design study for a **new radiotelescope**. No decision on the construction will be taken until the results of the design study and the detailed cost estimates are available.

Intended to increase the awareness of the technician engineer as to the factors contributing to the **reliability of equipment** a one-day conference is being organized by the Institution of Electrical and Electronics Technician Engineers in collaboration with the National Council for Quality and Reliability. It will be held at Queen Mary College, University of London, E.1, on April 5th. Provisional registrations are obtainable from the I.E.E.T.E., 26, Bloomsbury Square, London, W.C.1. (Fee 30s.).

Colour Television Servicing.—The City and Guilds of London Institute, in conjunction with the Radio Trades Examination Board, has introduced an examination in colour television servicing principles. The first examination to be held in June will consist of a three-hour written paper.

Bath University of Technology is holding a number of courses relating to electronics in the near future. On March 7th a three-day course will start on microwave solid state devices. (Fee £12.) Later in the year a five-day course on transistor electronics will be held in the school of Physics. This is intended to be an introductory course for teachers in schools and will start on August 21st. (Fee £10.) Enquiries to the secretary, Centre for Adult Studies, Bath University of Technology, Ashley Down, Bristol 7.


WHAT THEY SAY

“One of the few comforts in Britain's bleak situation is the outlook for the electronics industry. Despite the overall stagnation of the economy, the forecast for the British market predicts a 3.5% climb next year . . . 1967 should be the best year the electronics industry has yet had.”—From a survey of the European electronics markets in *Electronics*, December 26th, 1966.

“About one out of three people in the British electronics and instruments industry is under direct American control.”—From the *Electronics & Instruments Supplement* in the *Stock Exchange Gazette*, January 13th, 1967.

Amateur S.S.B. Transmitter

By C. J. SALVAGE

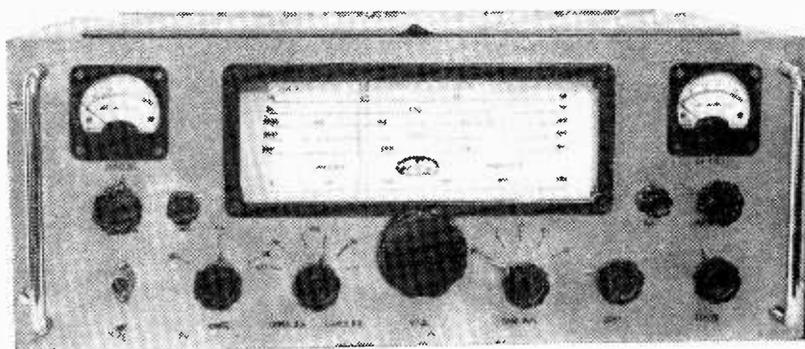

THE increasing use of single-sideband transmissions for commercial and amateur purposes in preference to other amplitude modulated transmissions is now a well-established feature of the communications field. The reason for this is not difficult to understand when one considers that, for a given power amplifier, s.s.b., with a suppressed carrier, gives +9 dB power gain over normal double-sideband a.m. with a carrier. This is more than is given by most beamed transmissions and represents a considerable step up in communication efficiency (or "talk power"). Further advantages are: reduced bandwidth requirements and



C. J. Salvage has been an amateur transmitter (G3HRO) since 1951 and was for some years chairman of the Aquila Radio Club of the Inspection Branch of the Ministry of Aviation. He is a keen s.s.b. transmitter. In the December 1961 issue of *Wireless World* he described a transistor mobile communications receiver for operation in the broadcast and six amateur bands. Since 1940 Mr. Salvage has been on the staff of the Services Electrical Standards Centre of the Ministry of Aviation Inspection Branch which is concerned with organizing the calibration of prime standards for the Services.

a reduction in noise resulting from more selective operation, an absence of the phase distortion associated with double-sideband transmission and possibility of multiple contacts on a common frequency. This last advantage is achieved by using voice control and by the fact that no carriers are produced which would otherwise cause eating.

General circuit description

The transmitter described in this article is for use on the five most used amateur bands: 80 m (3.5-3.8 Mc/s); 40 m (7.0-7.1 Mc/s); 20 m (14.0-14.35 Mc/s); 15 m (21.0-21.45 Mc/s); and 10 m (28.0-29.7 Mc/s). The bandwidth needed for the transmitted information is quite small, and this makes possible the use of phasing techniques without resort to frequency changers or crystals. A phasing type transmitter, as here described, produces a s.s.b. signal by phasing, or cancelling, two equal and opposite unwanted signals. The carrier and unwanted sideband are cancelled in one operation in a balanced modulator, leaving the required s.s.b. signal. This is brought about by:

1. producing two r.f. outputs from the amplified variable frequency oscillator (v.f.o.) displaced in phase by 90°.
2. producing two audio outputs from the audio amplifier also displaced in phase by 90°.

The four outputs are combined in two beam-deflection tetrodes to produce a s.s.b. signal at the required frequency, and this is amplified and fed to an output valve which runs at the full British permitted power. By increasing the p.a. supply voltage this rating can be well exceeded for use overseas. With the system employed, no crystals or frequency changers are used.

Voice control (VOX) is used extensively with s.s.b. and enables the

transmitter and the associated receiver to be operated simply by speaking into the microphone. As soon as speech is stopped the receiver automatically returns to the "receive" condition. In order that audio from the speaker will not trigger off the microphone and thus operate the transmitter, an anti-VOX system is incorporated. To simplify the description the circuit is divided into six parts as follows:—

- Fig. 1. v.f.o. and multiplier,
 - Fig. 2. r.f. phase shift network and balanced modulator,
 - Fig. 3. audio amplifier and audio phase shift network,
 - Fig. 4. transistorized VOX and anti-VOX,
 - Fig. 5. transmitter power amplifier.
 - Fig. 6. power supply unit.
- If required reinsertion of the carrier is possible.

The variable frequency oscillator and multiplier (Fig. 1) comprises an EF80 valve operating in a Colpitts oscillator circuit, separate inductances suitably padded being used to work at $\frac{1}{2}$ or $\frac{1}{3}$ the transmitter frequency. The reasons for running the v.f.o. at the lower frequencies are:

1. to produce higher stability,
2. to prevent pulling the v.f.o. off frequency by the power amplifier.

Details of coils and capacitors are shown in the tables. The 10 pF variable capacitor C_1 is switched across the main v.f.o. variable capacitor on the 80 and 10 metre bands in order to band-spread each band completely across the dial. Mechanical rigidity is essential for stability of the v.f.o. Potentiometer VR_1 is the driver control to the grid of a 6870 valve which acts as a frequency doubler on 80 and 40 metres and a tripler on 20, 15 and 10 metres. The anode circuit of the valve is tuned to the

Continued on Page 117

Fig. 1. Variable frequency oscillator and frequency multiplier. Note that the AB is connected to Fig. 4, x y to Fig. 2.

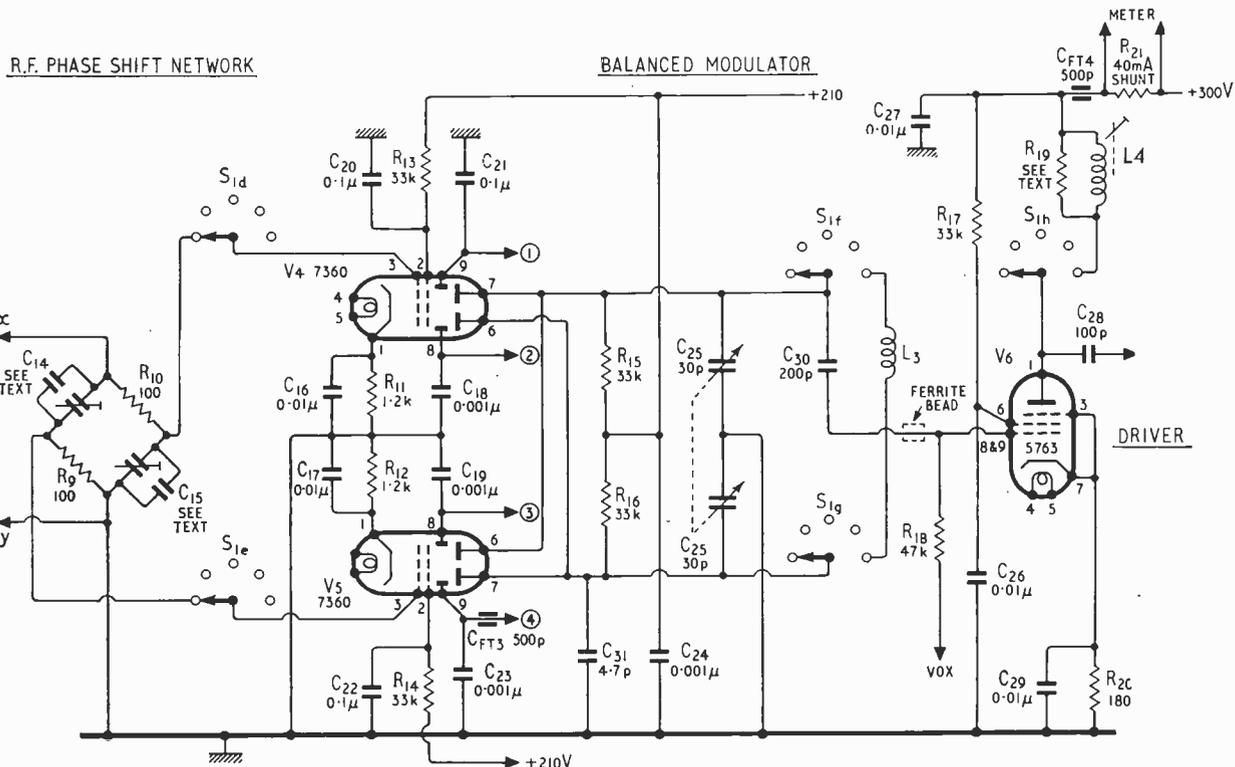
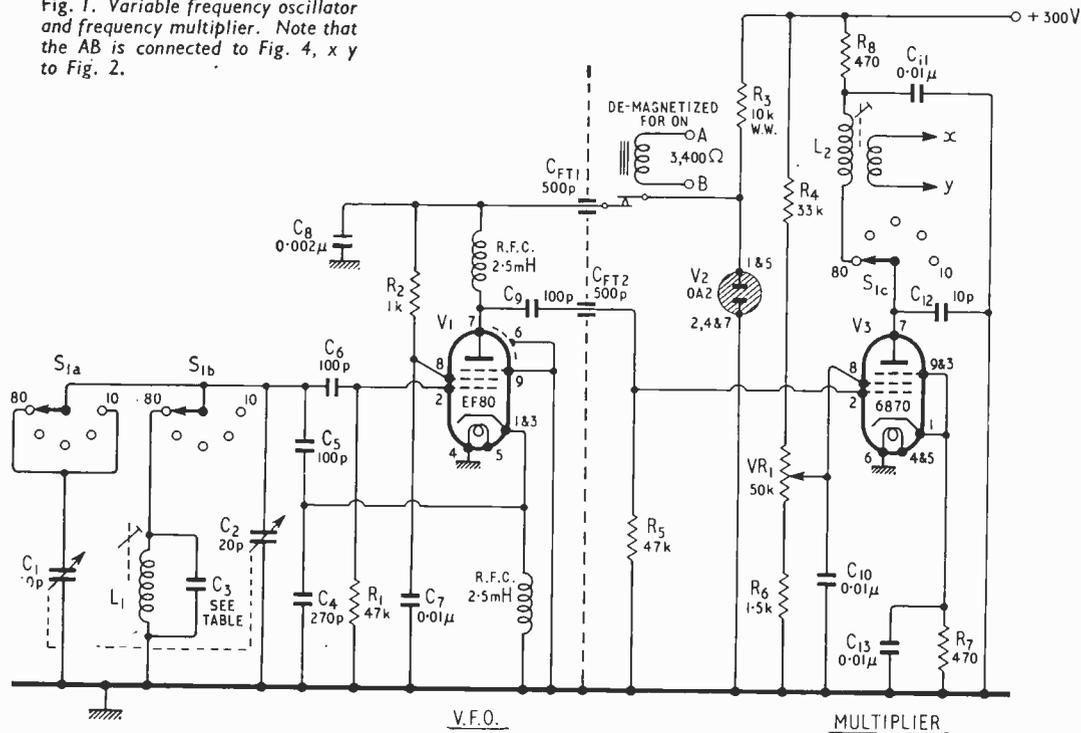


Fig. 2. Radio frequency phase shift network and balanced modulator. Note that the ferrite bead should be nearer to the grid of V6, the driving valve, than shown. Four outputs lead to the audio phase shift network, Fig. 3. The supply voltages for the balanced modulator and driver are 210V and 300V respectively. The driver has, via R₁₈, a connection to the VOX circuit Fig. 4, its output via C₂₈ leads to the power amplifier Fig. 5.

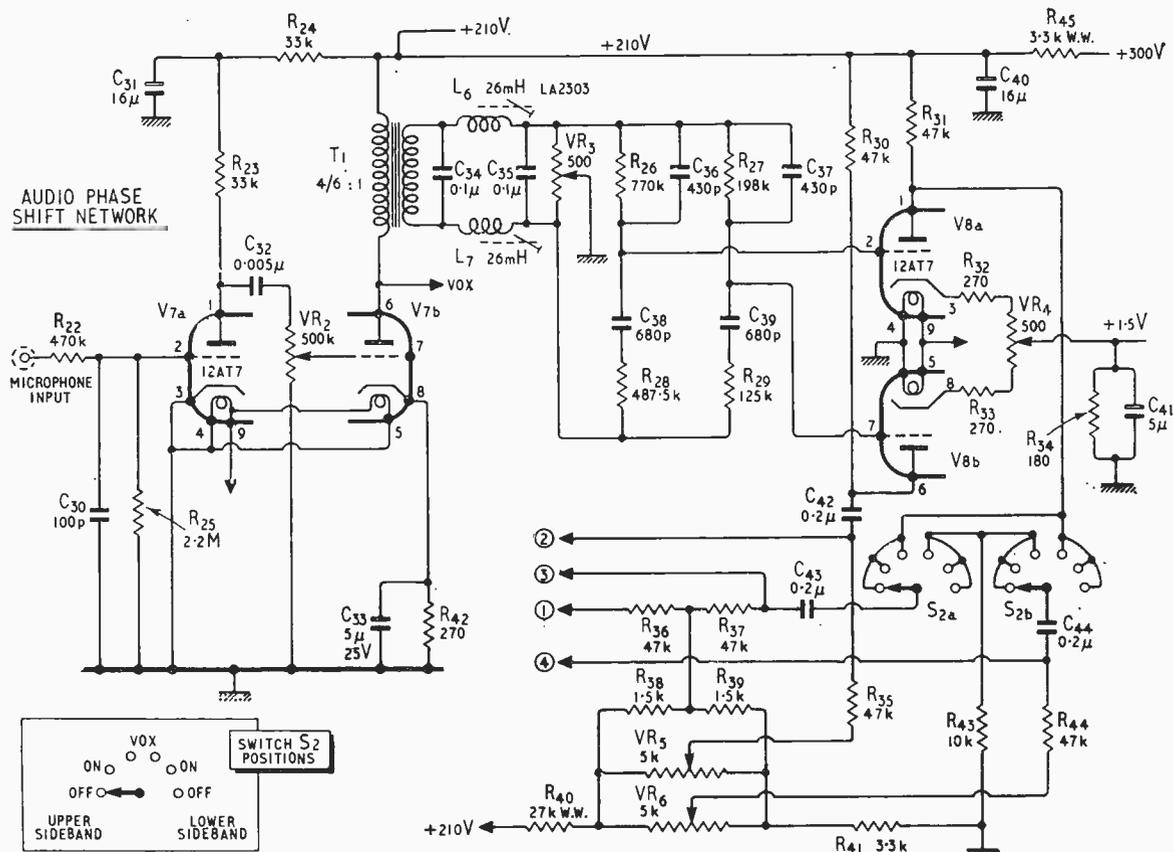


Fig. 3. Audio phase shift network contains microphone pre-amplifier with volume control. This has a 210V power supply requirement which is obtained via the smoothing circuit R₄₅, C₄₀ from a 300V power supply. From VR₄ 1.5V is taken to Fig. 4 the voice control circuit.

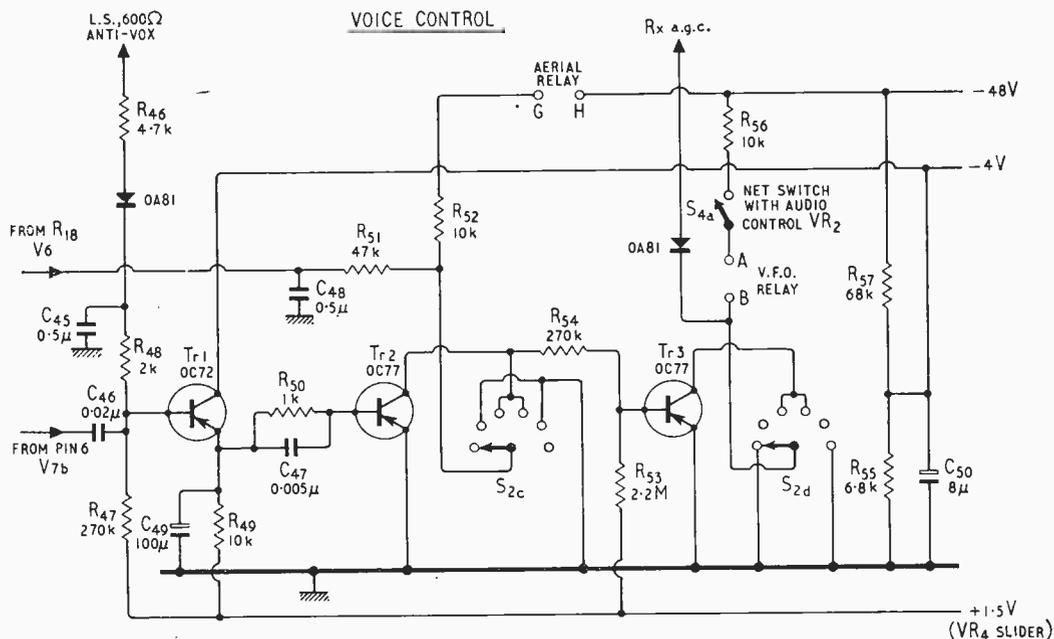



Fig. 4. Voice control circuit involves both the aerial changeover and v.f.o. cut-out relay coils. The anti-vox facility is connected to a receiver's loudspeaker or headphone output. Another connection to be made is that to a receiver's a.g.c. (at one time known as a.v.c.)

transmitted frequency by the coil L^2 , the inductive link $x y$ which is wound at the earthy end of the coil being taken to the r.f. phase shift network. (If difficulty is experienced in obtaining a 6870, a 5763 would most likely be suitable.)


R.F. phase shift network and balanced modulator (Fig. 2)—This starts with a capacitor-resistor network for each band. 100-ohm carbon resistors are used in two arms of the bridge and capacitors of good power factor with an impedance of 100 ohms at the operating frequency in the others. In the next issue values will be given and it will be noticed that a mid-point in each frequency band is chosen in order that displacement is unnoticeable at the extremes of each band. A value of approximately 10-15 pF is required to allow for strays. The output from this network is fed to the grids of the 7360s to form a balanced modulator.

The deflection plates 8 and 9 are fed with a.f. signals from the audio phase shift network (Fig. 3). The anode circuits of the 7360s balance and produce a single-sideband signal at the required frequency. A small capacitor C_{31} (4.7 pF) is used to compensate for the take-off capacitor C_{30} which provides the feed to the grid of V6. A ferrite bead was found to be advantageous on the grid lead of the 5763 and the power amplifier. The anode circuit of V6 has slug-tuned coils which are shunted by carbon resistors R_{19} (tables in next issue). This has the effect of broad banding the coil and also prevents instability. Although this does reduce the drive to the p.a. there is plenty of power available, so no loss is noticed.

Audio phase shift network (Fig. 3)—This starts with V7 (12AT7) as an audio pre-amplifier fed from the crystal microphone. Pin 6, the anode of the second triode, is connected to the voice control and also to a step-down transformer which feeds the audio filter (confining the spectrum to 300-3,000 c/s) and the resistor-capacitor network producing two outputs 90° out of phase from the anodes of V8. These outputs from V8 are fed to switches S_{2a} and S_{2b} , for selection of upper or lower sideband as required. Capacitors and resistors in the audio phase shift network must be adjusted to within 1% of the stated values by using series or parallel combinations. Failure to do so will lead to an out-of-balance condition in the audio spectrum. Good quality (low power factor) silver mica capacitors are essential.

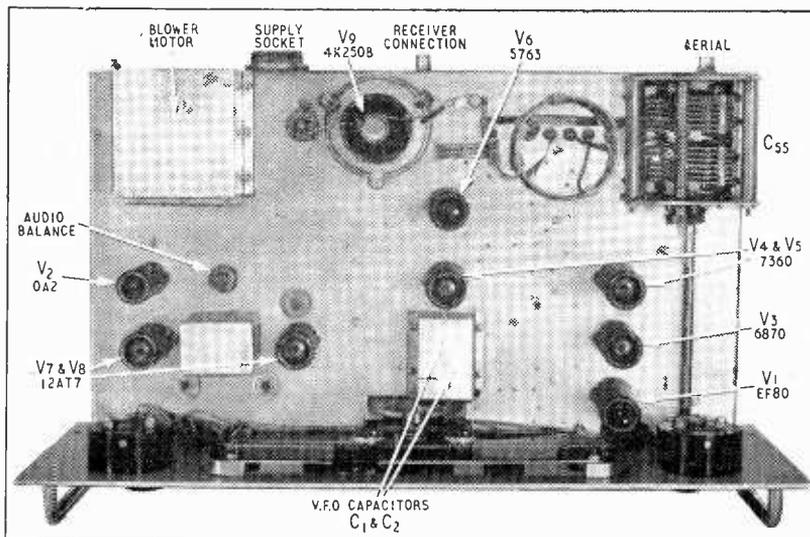

Layout above chassis showing the 3-turn 10-metre coil at right-angles to main inductor. Below is the under chassis view.

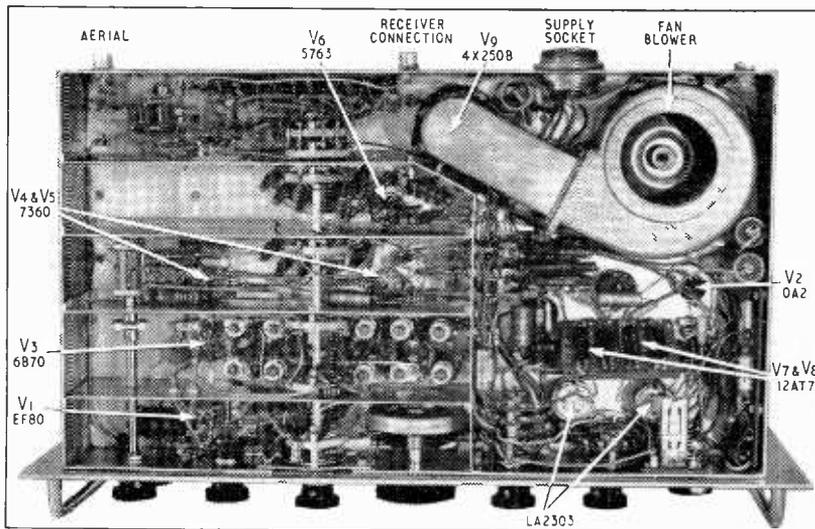

Voice control (Fig. 4)—With the switch S_{2c} and S_{2d} in the VOX position this control circuit acts as follows: Audio from the anode of V7b (Fig. 3) is fed to the base of transistor Tr1, and this has the effect of producing a negative potential at its emitter. As the emitter is connected via the delay circuit C_{17} , C_{19} , R_{30} to the base of transistor Tr2, the result is to overcome the 1½ V positive bias applied and cause Tr2 to conduct, thereby putting the collector of Tr2 virtually at earth potential. This in turn causes current to flow from the -48 V supply via the 10kΩ resistor R_{32} and the aerial change-over relay coil connected at GH. This connects the aerial for the "transmit" condition. At

the same time the base of transistor Tr3 becomes positive from the 1½-volt supply, putting it in a non-conducting state; therefore the collector assumes a potential of -48 volts from the supply. As a result the receiver is muted as the potential is applied to the a.g.c. line—the diode OA81 being used to prevent any feedback from the receiver's a.g.c. line when in operation. As no current now flows in the collector circuit of Tr3 the v.f.o. relay connected across AB is released, thus closing the contacts and bringing the v.f.o. into operation.

The delay circuit (C_{17} , C_{19} , R_{30}) is incorporated so that as soon as the microphone is actuated the system responds instantly and is held in the

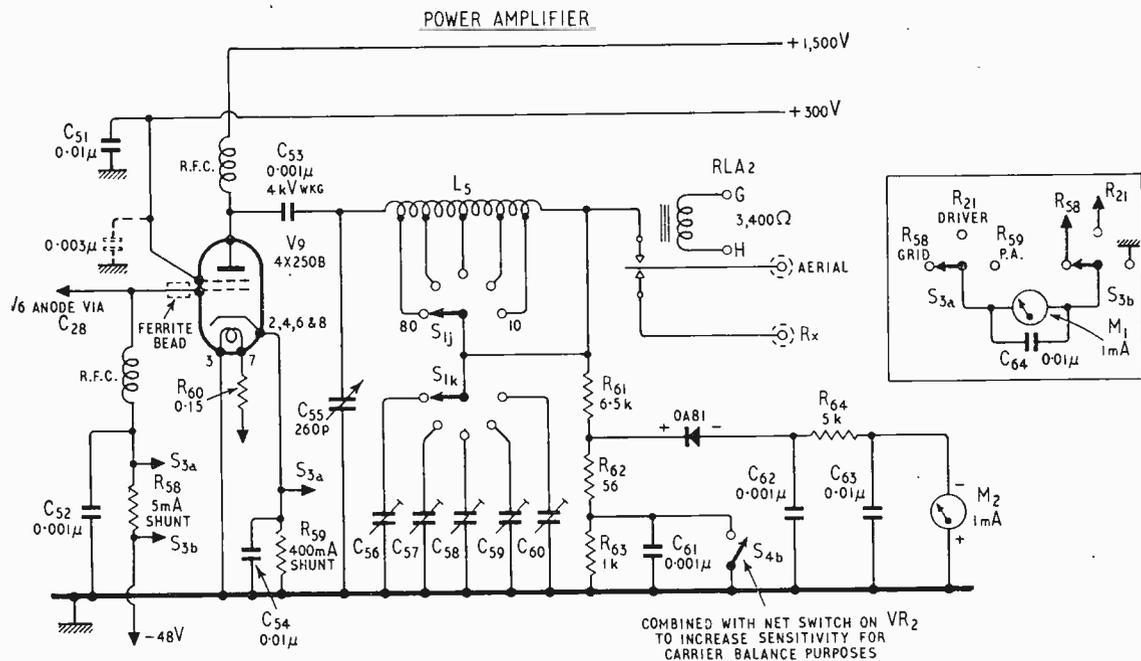


Fig. 5. The power amplifier circuit includes the metering circuits. Note that the dotted capacitor (under C_{61}) is included in a special valve base.

activated condition for several milliseconds by the charge on C_{51} . This delay in returning to the "receive" condition is necessary as otherwise the transmitter would switch on and off with every sentence spoken and every breath taken. With the switch S_{3a} and S_{2a} still in the VOX position and no audio applied, Tr2 becomes non-conducting and in so doing applies a potential of -48 volts to the grid of V6 (Fig. 2) thus cutting off this valve and the power amplifier. Also, as no current is flowing through R_{52} the aerial change-over relay is returned to the "receive" or rest condition. In this condition the base of Tr3 becomes negative, being connected via R_{51} to the collector of Tr2, causing Tr3 to conduct so that the collector is virtually at earth potential. This removes the -48 volts from the a.g.c. line of the receiver allowing it to operate. Simultaneously, current flows through the v.f.o. relay AB, causing the contacts to be opened, thus switching off the v.f.o. to avoid beat frequency oscillation with the receiver.

Anti-VOX (Fig. 4).—When the receiver is being tuned, audio from the speaker will actuate the microphone and cause the transmitter to be operative if it were not for the anti-VOX circuit C_{45} , R_{16} , R_{15} and the diode OA81 which is fed from the speaker output, or audio output, at approx.

600 ohms. This output is rectified by the diode and produces a positive potential at the base of Tr1 which over-rides the negative potential produced from the audio fed from the anode of V7b (Fig. 3), thereby keeping the transmitter in the "receive" condition. Manual operation can be effected by switch S2, and this also switches the receiver and aerial to the appropriate condition, i.e., when the transmitter is on, the receiver will be muted and aerial switched to the transmitter, and vice-versa.

Power amplifier (Fig. 5).—This comprises a 4X250B valve which is supplied with an anode voltage of 1,500 V. It is driven by V6 in Fig. 2. The meter (1 mA movement) can be switched by S_{3a} and S_{3b} to read grid drive current at 5 mA maximum. This drive should be kept to a minimum in order to avoid distortion.

Cathode current is measured in preference to anode current since in the anode circuit the terminals of the meter and switch contacts would have a potential of 1,500 V to earth and therefore would be highly dangerous if touched during adjustment of controls. It must be remembered therefore that both screen (30 mA approx.) and anode current are measured together, and the heavy 400 mA shunt applies heavy damping to the meter. R_{60} is a dropping resistor

as the filament of the 4X250B operates at 6 V, 2.6 A. The dotted-line capacitor $0.003 \mu\text{F}$ is in fact incorporated in the valveholder, but this screen by-pass is increased by the addition of C_{51} for use at the lower frequencies. The 70Ω output is tuned by the pre-set capacitors C_{56} – C_{60} . Instead of the usual aerial ammeter, a voltmeter is used, the d.c. for the 1 mA movement being rectified by the diode OA81. A radio frequency signal is taken from the resistor chain R_{61} , R_{62} , R_{63} . The switch S_{4b} is open-circuited when VR_2 is turned anti-clockwise and in so doing provides greater sensitivity for balancing the carrier. It will be noted that as VR_2 is in the minimum position when this takes place no audio can get through to operate the transmitter, as this would be disastrous to the meter. The 4X250B valve can be operated at higher voltages if required to give up to 1 kW peak power.*

* U.K. limit is 400W peak envelope power—ED.

REMAINING DETAILS

The April issue will contain the power supply circuit, components list, lining up and operational instructions.

TROJAN RELAYS

A METHOD FOR RADIO COMMUNICATION ACROSS THE SOLAR SYSTEM

By JAMES STRONG, B.Sc. (Eng.), A.C.G.I.,

IF the currently debated proposal to survey the Solar System with the aid of interplanetary probes is shown to be feasible, some awkward problems in two-way radio communication will have to be faced. For although the successful Mariner flights to Mars and Venus might suggest that a straightforward improvement in radio range is all that is needed to cope with more distant probes, the problem is now seen to be more fundamental.

Primarily the difficulty stems from the orbital motion of the Earth, which each year bears it to a region behind the Sun, relative to any probe, where it can no longer "see" the radio aeriels of the spacecraft. In such circumstances direct, line-of-sight communication becomes impossible and there is nothing the radio engineer can do about it. Nor is it merely a question of waiting a day or so until the occulted probe reappears in view; weeks may elapse before attenuated signals can penetrate the background noise due to the solar corona.

It could be argued, of course, and with some justification possibly, that by choosing another launch "window" the crucial moment of encounter with a distant world could be put off to a more convenient date. This may be true enough in some instances, but it is expediency pure and simple, and, with the hoped for expansion in future space activity, can we afford to accept a hiatus in communication every time the Earth finds itself in conjunction with a transmitting source? If planetary orbiters are to do their work efficiently, year in, year out; if solar probes are to travel within 0.1 astronomical unit* of the other side of the Sun; if comets have to be intercepted anywhere in space at rapid notice, talk of convenient launch dates becomes meaningless. And with the possible establishment of manned bases on other worlds, including trip times of 400-500 days, continuous communication, with no reservations, becomes imperative.

Communications for Mariner

However, before proposing a possible solution to the difficulty, it is worth studying the communication techniques used for each of the Mariner interplanetary flights. This will then reveal why similar methods cannot be applied to, say, a "flyby" mission to Jupiter, one of the survey projects now being studied.

The essence of long-range radio communication lies in concentrating whatever radiated power is available into as narrow an aerial beam as possible. It follows that the second essential must be precision alignment of the beam with the target tracking system, i.e. the Earth. Mariner II on its journey to Venus used an Earth sensor, a photomultiplier boresighted to its high gain aerial, which served to lock the aerial beam on to the Earth's disc. Even so, there was a risk that the sensor would mistakenly come to rest on the Moon when it searched initially, and provision was made for ground signals to

James G. Strong is a design study engineer working on advanced projects in the Air Weapons Division of Hawker Siddeley Dynamics Ltd. Previously he had worked on Blue Streak and as a senior stress analyst with De Havilland Aircraft. Well known as a writer on spaceflight for aeronautical journals, he has published a book "Flight to the Stars" inquiring into the feasibility of interstellar flight

override the spacecraft's internal circuits, causing it to break the lock and search again if the signal strength proved less than expected.

In the case of the Mariner IV flight to Mars this method could not be adopted as the Earth moved in orbit inside Mariner IV's flight trajectory, and in trying to follow the Earth's disc the sensor would almost certainly be "blinded" by the Sun. Instead, and because the trajectory was opportune, it was found possible to fix the axis of the high gain aerial with respect to the flight path and still cover the Earth adequately within the aerial beam for most of the 228-day journey.

To bring the aerial to bear in the right direction, now it was fixed, quite a sophisticated attitude control manoeuvre had first to be executed. Shortly after being launched on course, and having freed itself from its Agena boost stage, Mariner IV spread its solar panels, searched for the Sun and locked on to it. It could then draw power and dispense with its internal batteries. Because a second reference axis was also needed the spacecraft then slowly rolled about its solar-pointing axis until its star-tracker had acquired Canopus, a large-magnitude star conveniently close to the south ecliptic pole. Once these two reference axes were secured, mutually at right angles, the vehicle's attitude was fixed in space and its aerial system automatically pointed directly towards Earth. Apart from some concern early on, when the star-tracker repeatedly lost lock and came to rest on another star, the system performed with merit once the trouble had been identified and effectively isolated.

Turning now to the requirements for a probe surveillance of Jupiter, whose orbit lies beyond Mars, some 400 million miles away, neither of the two Mariner methods of aerial pointing are of any use. Calculations show that even when propelled by the powerful Saturn boosters soon to become available, an interplanetary probe will still take $2\frac{1}{2}$ years to reach Jupiter. Consequently the Mariner IV fixed aerial principle would be unable to cope with a situation in which the Earth twice circled the Sun during the trip time, while Earth sensing is plainly confined to trajectories that lie inside the Earth's orbit where the sensor looks away from the Sun.

No doubt a steerable aerial, programmed to follow a year-long, simple harmonic sweep would fit the bill, provided enough fuel for the continuous operation of

* 1 astronomical unit is the mean distance of the Earth from the Sun

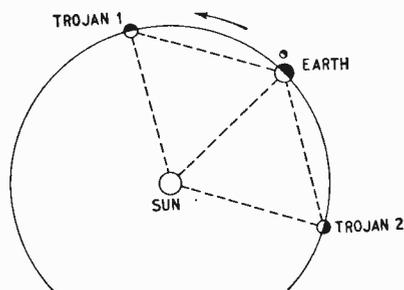


Fig. 1. Satellites that travel along the Earth's orbital path at the same speed as the earth remain in stable equilibrium if they are stationed at the Earth's "equilaterals" as shown.

small thrust jets could be carried. Alternatively, the aerial could be locked on to the Sun, but we should then have to resign ourselves to communicating with the probe only when the Earth passed through the aerial beam. This is not as bad as it sounds, for contact would be made during the critical period up to four months after the launch date, when course corrections might be necessary. Thereafter contact would take place during the 17th and 30th months after launch, the latter period coinciding with an encounter with Jupiter.

During the somewhat prolonged intervals of silence between these dates, environmental data accumulated en route would have to be stored and played back when the opportunity presented itself. Either way, whichever scheme were adopted, all contact would still be lost when the Earth was in conjunction on the other side of the Sun. On the face of it there seems only one way to circumvent this dilemma, but it is a concept that calls for as much courage and imagination as it does careful thought.

Earth equilateral

One of the lesser known theorems of celestial mechanics is the three-body problem, first published as an essay by the French mathematician, Lagrange, in 1772. In it he showed that if a planet, such as the Earth, revolved in a circular or elliptical orbit around a massive second body, such as the Sun, there were two positions in space where, if a third body were introduced, this body would remain in dynamic equilibrium. Both positions lie along the planet's orbital path, one leading and the other lagging behind the planet by 60° respectively. They are known as "planet equilaterals" for they form, together with the Sun and (in our case) the Earth, the apices of two giant equilateral triangles whose sides are 93 million miles long (see Fig. 1).

The gravitational and centrifugal forces that hold an Earth equilateral body in space require, as a prime condition of equilibrium, that the body should be moving at the same speed and direction as the Earth and along its orbital path. With these conditions fulfilled the body will then remain in its relative position indefinitely, and only force can dislodge it.

Remarkable proof of the three-body problem has been found in the so-called Trojans of Jupiter, two groups of small asteroids (named after heroes of the Trojan War—Hector, Achilles, Troilus, etc.) that are unmistakably travelling along Jupiter's path, ahead and behind the planet. Once wandering asteroids, they must have been captured in the remote past and are now prisoners for all time at Jupiter's equilaterals, perhaps better known as the Trojan Positions.

From this it follows that if we deliberately station satellites at the equilaterals of the Earth they also will be subject to the same natural laws, and there may be other benefits to be had. First, the satellites will possess an inherent, self-compensating ability to remain "on

station," and we can forget the need to correct any tendency to drift, as we do in the case of satellites in synchronous orbit above the Earth. Secondly, and equally important, since they flank the Earth they enable us to "see" around the Sun where it blocks our radio view. In effect they would act as radio periscopes, relaying incoming signals we should otherwise never receive, and relaying outgoing instructions in the same manner. Because of their unique position, they could be called Trojan relays.

It might be asked whether the dynamic equilibrium of a Trojan relay would be disturbed by the gravitational pull of planets passing in adjacent orbits. Undoubtedly it would be perturbed to some extent, for every planet exerts *some* influence on every other body in the solar system, but with Venus never closer than 25 million miles, and Mars rarely less than 40 million miles away, their influence would be negligible. In these circumstances it is doubtful whether the orbital shift they might induce would be observable in much less than a century, and certainly there seems little need for qualms on his score.

Design of relays

Though Trojan relays will help to solve the difficulty of solar occultation, it is only fair to admit they are bound to bring other problems in their train. These may be grouped under the headings of reliability, attitude control, power supplies and long life. Placing the Trojans in position is the least of our worries, a matter of propulsive effort and navigational accuracy that is well within the capability of existing space equipment.

Until spaceflight becomes commonplace, and orbiting satellites are serviced periodically like Trinity House navigational buoys, a long and durable life, coupled with absolute reliability is essential. This would be especially pertinent to a Trojan relay for, at a distance from the Earth equal to the Sun itself, inspections would be most infrequent. It would probably be more economic to launch a replacement than go to the trouble of refurbishing one that has ceased to function for any reason. Consequently circuit redundancy, duplicate sub-systems, long-life power supplies and maximum protection from meteorite and radiation hazards must take priority in the design.

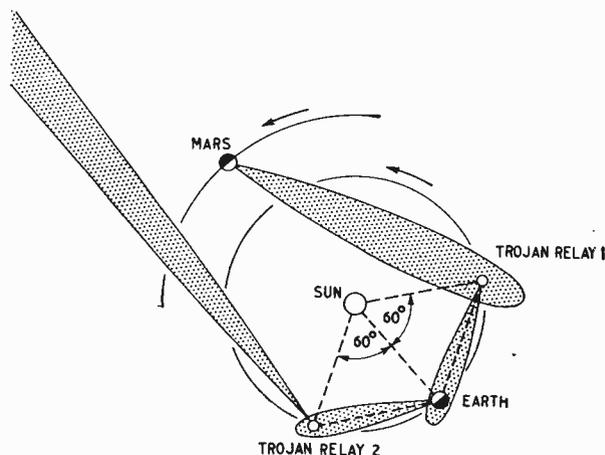


Fig. 2. Trojan relay stations would prevent all radio contact with spacecraft being cut off for several weeks, due to the solar corona, while Earth was in conjunction. The figure shows both incoming and outgoing messages being relayed "around the Sun".

Ideally, of course, all electrical power should be drawn from the Sun, but it may be some while before solar cells are efficient enough to satisfy all needs completely. Meanwhile, contacting interplanetary probes launched in the next decade or so, with the prospect of reaching Saturn or even Uranus, 2,000 million miles from the Sun, will demand prodigious amounts of power. To meet this requirement large and improved nuclear-powered generators would have to be developed, even though their reliability in space is still an unknown quantity.

Attitude control, so vital to accurate aerial-pointing, will present the toughest problem of all, for any form of orientation by means of small thrust jets sets a limit on the life of the relay when the fuel is exhausted. The alternative seems to lie in the progressive development of gravity-gradient stabilization, using the Sun's gravitational field to exert erecting forces on the relay via four long, slender booms at the ends of which are fluid dampers. Initially the relay might have to be oriented by jets, but once a series of star-trackers had locked on to specific sources they could control the vehicle electrically, counteracting small oscillations by lengthening or shortening appropriate booms. Any forces or torques generated in the system as a result of swinging the aerial about an axis would naturally have to be balanced by moving counterweights.

Stabilizing the relay by deliberately spinning it, as in the Intelsat satellites, is possible but perhaps not useful because of aerial-beam orientation problems. It is probably better to provide the relay with enough nitrogen fuel to stabilize itself with the aid of small gas jets. Without too great a weight penalty enough fuel could be carried to last five years, and by then everyone will be anxious to replace the relay with something better anyway. Equipped with duplicate Canopus sensors, Earth sensors and Sun sensors, the relay should have no difficulty in orienting itself in space with sufficient accuracy to direct its aerals precisely when commanded to.

On the question of radio range it is now known that communication between such a relay station and Earth is feasible. This can be seen from the fact that Mariner IV's 10-watt travelling-wave-tube transmitter supplied adequate signal strength over a distance of 134 million miles, and subsequently was detectable at 191 million miles, more than twice the distance from Earth to a Lagrangian "point" on the Earth's orbit.

However, it is conceivable that an interplanetary probe will have reached the vicinity of Uranus by the late 1980s, and if a Trojan relay is in position and operational by then it will be expected to reach out to a distance of some 2,000 million miles. All things being equal, on applying the inverse-square law to the basic transmission formula it will be found that r.f. power of some 2-2½ kW will have to be radiated. While future developments can perhaps be expected to reduce this figure, refinement of detail, as in other aspects of spaceflight, usually turns out to be less important than accepting the inevitable and learning how to generate copious amounts of energy.

Lastly, if so large and heavy a satellite is to be placed where it becomes the focal point for other, improved versions that may wish to occupy the same space one day, it must be possible to destroy the station completely so as not to constitute a hazard to its replacement. Admittedly space is large, and there is little risk of physical contact, but a few ounces of high explosive and a radio frequency combination lock will put an end to any chance interference or future embarrassment.

This leaves only the problem of launching and positioning the relays along the Earth's orbit. Perhaps con-

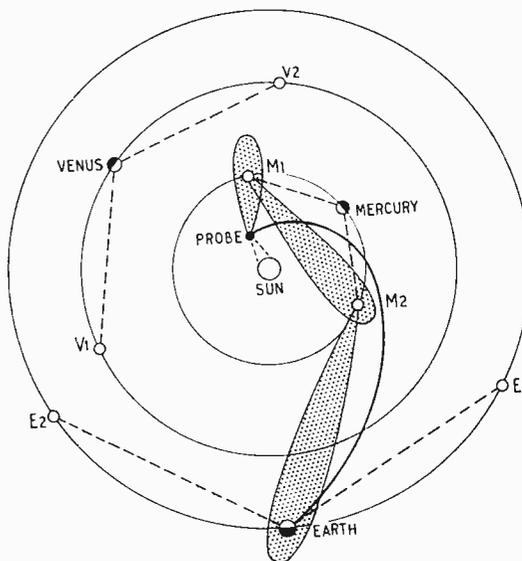


Fig. 3. A network of Trojan relays stationed at the equilaterals of the inner planets, Mercury and Venus, would provide complete coverage for space activities inside the Earth's orbit. The diagram shows how data from a solar probe on the other side of the Sun would be relayed to Earth.

trary to expectation, both relays would be launched in a forward direction, relative to the Earth's motion, one swinging outwards along an arc that returned to intersect the orbital path, the other inwards to enter a perihelion orbit round the Sun before coming up behind the Earth. On reaching their stations, both relays would be slowed by retro-rockets to the same speed as the Earth. Their final position would not be important to within a degree or so, but the resultant velocity vector should be substantially correct.

Completing the network

The safe deployment of Trojan relays on either side of the Earth still leaves unresolved the question of how an interplanetary probe will recognize in which direction to aim its aerals. Circumstances will vary, and the only safe decision is to provide it with a steerable aerial and a set of reference axes. Direction co-ordinates would be transmitted from Earth when the time came, via a Trojan relay possibly, but now with sure knowledge that an answer should come back wherever Earth was (Fig. 2).

Nevertheless, even with two Trojans operational, there still would be blind areas that could not be viewed, especially the region between the orbit of Mercury and the Sun. However, if Trojans can be set up at the Earth equilaterals they can be stationed just as easily at the equilaterals of the inner planets, Venus and Mercury. Being closer to the Sun, they would orbit more rapidly: Venus equilateral in 225 days and Mercury equilateral in 88 days. One or other of the six Trojans then in motion should ensure that solar system coverage was complete (Fig. 3).

No doubt many aspects of this Trojan relay scheme are debatable, and some people may well regard the whole idea as outrageous. But, equally, there may be other unsuspected advantages in the scheme that only the future can disclose. Possibly not until these have been realized will someone have the courage to propose we put the Trojans to work.

Design of Schmitt Trigger Circuits

FOR DEFINED THRESHOLD APPLICATIONS

By A. E. CRUMP

Much of the design work involved in the calculation of a Schmitt trigger circuit tends to be empirical, and the purpose of this article is to present a step-by-step design method so that the necessary resistor values may be obtained merely by substituting the required parameters in a set of equations. The article is concerned with circuit design from the viewpoint of trip points. Here the author deals with the normal Schmitt circuit and later will be concerned with the case of an additional emitter resistor—often neglected in the literature.

SCHMITT trigger circuits are frequently used in voltage monitoring applications. In many cases, the design requirement is for a circuit to give a certain value of "backlash" voltage, whereas in others a certain output condition is to be presented at a precisely determined magnitude of input voltage.

This article is intended to deal with these two requirements only, and the design methods described apply to the basic circuit shown in Fig. 1. Although there are variants to the basic Schmitt trigger, and it is acknowledged that they have advantages in certain applications, the circuit of Fig. 1 is highly suitable for general purpose applications where a set of design formulae may be standardised.

Two approaches to design are described, one for the simpler, general purpose applications where stability of threshold conditions is not very critical (and medium to high values of backlash are required), and the other for precise work, where stability of threshold voltages must be guaranteed to close tolerances at small values of backlash.

BACKLASH

The circuit of Fig. 1 has two states. One state is with Tr1 on and Tr2 off, and the other with Tr1 off and Tr2 on.

Fig. 2 shows the ideal curve of collector current (I_{C2}) of Tr2 plotted against input voltage (V_{IN}) to trigger. It can be seen that when V_{IN} is zero, I_{C2} is a maximum and that when V_{IN} is increased, a point is reached where I_{C2} suddenly drops to zero. This voltage will be referred to as the "restore" voltage, i.e. the voltage at which Tr1 conduction is restored. It is also noted from Fig. 2 that reversion to the condition where Tr2 is conducting only occurs when V_{IN} is reduced to a value below the restore voltage (V_R). This lower voltage will be referred to as the "trip" voltage (V_T).

The difference between V_T and V_R is referred to as the backlash or hysteresis of the circuit.

The design problems involved in designing a precise circuit to have a certain ($V_R - V_T$) value are considerably less than those involved in producing an absolute value of V_R and/or V_T . This is because in the former case V_R and V_T values may be selected so that they are high compared to the base-emitter voltage drop (V_{BE}) of the transistors, thus easing the temperature stability problems.

In the latter case, the V_T and V_R values are design parameters, and so their proximity to V_{BE} values is predetermined, and suitable temperature corrections must be made.

LOOP GAIN

The transition from one state to the other at V_R and V_T is caused by a regenerative, or a positive feedback effect.

Let us consider that at V_T and V_R both Tr1 and Tr2 momentarily conduct i.e. during the transition region. The a.c. equivalent circuit of the trigger is shown in Fig. 3, and it is apparent that there is a closed loop of positive feedback as shown by the arrows. This means that providing the loop gain, $\gamma_o \geq 1$, the circuit will oscillate. Now the condition where Tr1 and Tr2 are both conducting is a very unstable one, as their base voltages have to be of comparable magnitude and polarity. As soon as oscillatory conditions are set up, the first transient of oscillation disrupts this delicate condition, and the circuit rapidly assumes one of the two states where only one transistor is conducting.

Now if the loop gain is less than unity, oscillation will not take place and so there will not be a rapid transition of state; instead the circuit will slowly change state and can be stopped between the two states, with both transistors conducting.

A source of error during computation of loop gain is failure to calculate it at low values of collector current. As a regeneration condition is approached, one transistor

A. E. Crump, who is now senior circuit designer at Plessey Automation Ltd, Poole, started his career as an electrical engineering apprentice with G.E.C., Coventry, in 1955. He worked mainly on line communications and when he left in 1964 he was senior group leader on active networks. From 1964 until joining Plessey he was with Redifon working on flight simulators.



s biased off. Now at the instant when it starts to turn on, its collector current will be low and so its current amplification value (β) will be much lower than the value at full conduction, see Fig. 4. Thus the loop gain will vary as the transistor turns on. Now if the full conduction value of loop gain is close to unity, then the circuit will initially have a loop gain less than unity, and regeneration will not take place until loop gain reaches unity. This results in an uncertainty of the value of V_R and V_T , because the low-current loop gain will be ill-defined, and part of the switching characteristic will be sluggish.

For these reasons, it is advisable to design the circuit for loop gain far greater than unity in the full conduction region, thus reducing the uncertainty of V_R and V_T . If the low-current parameters of the transistors are known, these should be used in γ_0 calculation.

The higher the loop gain, the lower the uncertainty. This is demonstrated in Fig. 5. The loop gain is therefore a very important design parameter. (An expression for loop gain of the trigger is derived in Appendix 1.)

It is noteworthy that it is more difficult to achieve high loop gain with low backlash, than with high backlash. There is a relationship between backlash and loop gain, but it is not intended to investigate this aspect within the scope of this particular article.

The equation derived in Appendix 1 indicates that the γ_0 value is more dependent on β_2 than on β_1 , as the function of β_1 present is α_1 . Now, $\alpha_1 = \beta_1 / (1 + \beta_1)$ and $d\alpha_1 / d\beta_1 = -1 / (1 + \beta_1)^2$, hence changes in β_1 have a very small effect on α_1 and so a small effect on γ_0 .

It is apparent therefore that the starting value of γ_0 will be higher when Tr2 is turning off and Tr1 turning on, than in the reverse condition, i.e. γ_0 will be higher at V_R than at V_T . This effect is more noticeable at low values of backlash.

BASIC TRIGGER (Fig. 1)

Consider the design procedure for predetermined V_R and V_T . The equivalent circuit with Tr1 conducting and Tr2 off is shown in Fig. 6. The circuit is analysed in Appendix 2, and an expression for V_T obtained. For non-precision applications and especially where silicon transistors are used the leakage currents may be neglected, and the expression can be modified to:—

$$V_T = \frac{V_{CC} + \alpha_1 V_{BE1} \frac{R_L}{R_E}}{1 + \frac{R_1 + R_L}{R_2} + \alpha_1 \frac{R_L}{R_E}} + V_{BE1} - V'_{BE2} \quad \dots \quad (1)$$

The equivalent circuit with Tr2 conducting and Tr1 off, is shown in Fig. 7. The circuit is analysed in Appendix 3 and an expression for V_R obtained.

Modifying the equation derived in Appendix 3 to neglect leakage currents:—

$$V_R = \frac{V_{CC} + V_{BE2} \left(\frac{R_1 + R_L}{(1 + \beta_2) R_E} \right)}{1 + R_1 + R_L \left(\frac{1}{R_2} + \frac{1}{(1 + \beta_2) R_E} \right)} + V'_{BE1} - V_{BE2} \quad (2)$$

(V'_{BE} is the value of V_{BE} at which conduction commences, as opposed to the full conduction value, see Fig. 8.)

To present a step-by-step design sequence it is necessary to manipulate expressions (1) and (2) and to evaluate some of their terms. The unknown circuit constants are R_1 , R_2 , R_L , and R_E . The transistor parameters will be


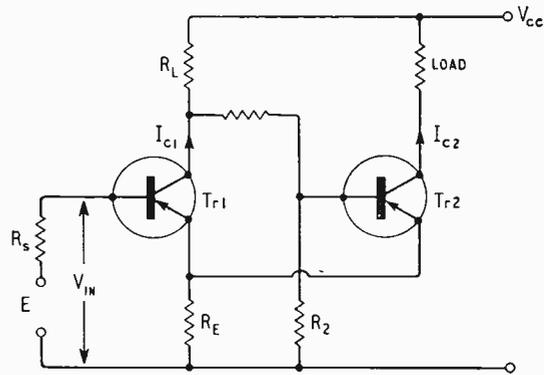


Fig. 1. Basic Schmitt trigger circuit.

Fig. 2. Ideal V_{IN} I_{C2} characteristic.

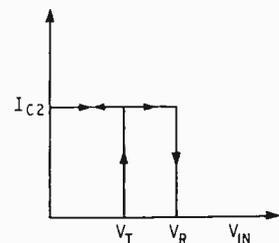

Below: Fig. 3. Small-signal open-loop equivalent circuit.



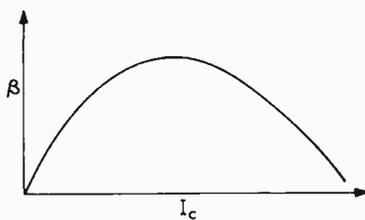


Fig. 4. Variation of β vs collector current.

Fig. 5. Effect of γ_0 on V_{IN} I_{C2} characteristic.

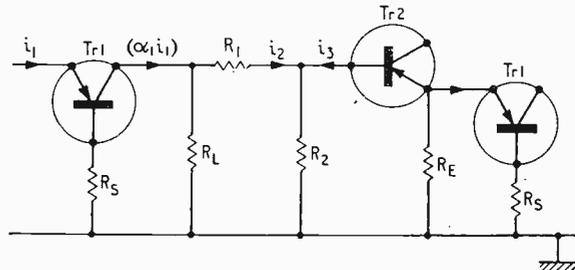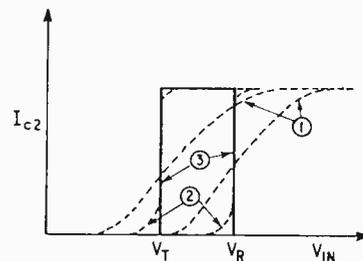

- ① STARTING AND MAXIMUM γ_0 VALUES < 1
- ② STARTING $\gamma_0 < 1$, MAXIMUM γ_0 VALUES > 1
- ③ STARTING AND MAXIMUM γ_0 VALUES > 1

known from the data sheets of the transistors used. V_R and V_T are design parameters.

If two of the unknown constants could be evaluated by other means, then (1) and (2) could be solved simultaneously to find the other two.

R_E Calculation. R_E can be calculated from V_R and I_{C2} . This presets the desired output conditions from Tr2 as a design parameter.

$$R_E = \frac{(V_{R(min)} - V_{BE2}) \alpha_{2(min)}}{I_{C2}} \dots \dots \dots (3)$$

(This equation is derived by inspection of Fig. 7.)

Calculation of R_2 from stability considerations

It is apparent from (1) and (2) that V_T is less affected by transistor β than is V_R , as the significant coefficient in (1) is α , which is relatively insensitive to β variations, whereas the significant coefficients in (2) are directly dependent on β . The condition is analysed in Appendix 4, where the problem is the shunting of R_2 by the input resistance (R) of Tr2 stage. In the manner shown, R_2 can be calculated from the required tolerance on V_R and the β spread of Tr2.

The β_{2max} and β_{2min} figures used in Appendix 4 may be expressed as:—

- (a) Selection tolerance of β_2 .
- (b) Selection tolerance plus temperature effect tolerance.
- (c) Temperature effect tolerance only.

In case (c) the β selection tolerance would be overcome by selection of R_2 to give the required V_R on each trigger manufactured; but on the other hand higher loop gain would be achievable than in cases (a) and (b) due to the reduced β spread. The more convenient approach is to use case (b) and calculate the overall temperature effect from (6) and putting $\delta\beta_2/\delta T = 0$.

DESIGN SEQUENCE

The design sequence is summarized in the panel. Although the expressions appear cumbersome, they are quite simple to use as their practical application merely involves substitution followed by simple arithmetic. An example showing the design procedure is given at the end of this article. Various checks should be made to the resistor design values derived from the equations suggested in the panel, such as those given below.

Loop Gain Check. The calculated resistor values

SUMMARY OF DESIGN PROCEDURE

- (1) Calculate R_E from (3).
- (2) Calculate R_2 from Appendix 4.
- (3) Calculate R_L and R_1 by solving (1) and (2), yielding:—

$$R_L = \frac{V_{CC}}{V'_T} - \frac{V_{CC} - V_R - V_{BE2} + V'_{BE1}}{\left[(V_R - V'_{BE1}) \left(\frac{1}{R_2} + \frac{1}{(1 + \beta_2) R_E} \right) + \frac{V_{BE2}}{R_2} \right]} \cdot \frac{R_E}{R_2 \left(1 + \frac{V_{BE1}}{V'_T} \right) \alpha_1} \dots \dots \dots (7)$$

and $R_1 = \left[\frac{V_{CC}}{V'_T} + \alpha_1 \cdot \frac{R_L}{R_E} \left(\frac{V_{BE1}}{V'_T} - 1 \right) \right] R_2 - R_L \dots \dots \dots (8)$

where $V'_T = V_T - V_{BE1} + V'_{BE2}$

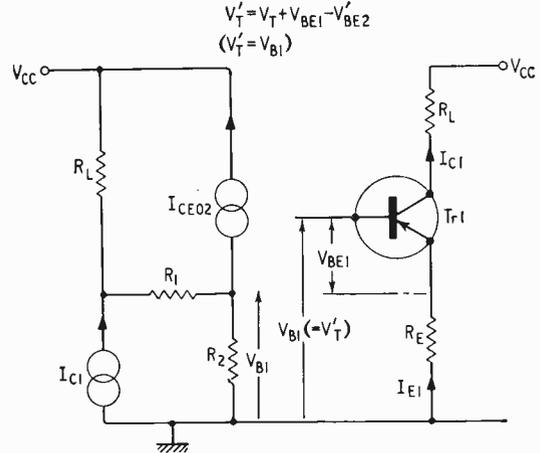


Fig. 6. D.C. equivalent circuit at V_T threshold.

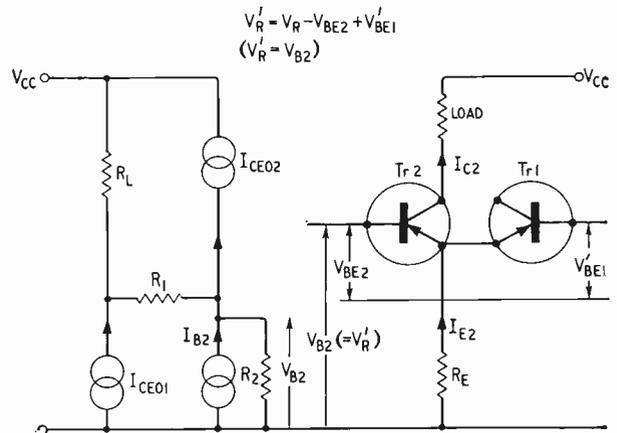


Fig. 7. D.C. equivalent circuit at V_R threshold.

should be inserted in the equation for γ_o (Appendix 1) to check the loop gain, bearing in mind previous discussion regarding the low-current value of β_2 . If the calculated value of γ_o is less than unity, there are various steps that can be taken to improve it, the choice depending on the application.

- (a) Either increase V_{CC} or return R_L to a higher voltage rail, recalculating resistor values.
- (b) Reduce R_E .
- (c) Widen the V_R tolerance.
- (d) Use higher gain transistors.
- (e) Return R_E to a more positive supply.

These various remedies can be tried by substitution in the γ_o expression (Appendix 1) until the required result is obtained. Generally, the γ_o value will be greater than unity, but in cases of low backlash and/or high V_R accuracy, some of these remedies may be necessary.

Saturation. It occasionally happens that a trigger designed as described saturates while the input voltage is increasing from V_T to V_R . In the trigger to be described in Part 2, this condition can be designed-out, but with the basic trigger there are not enough circuit variables to pre-determine the saturation point. After completing the design sequence, therefore, it is advisable to substitute in expression (4) to find the input saturation voltage. If saturation is encountered, the circuit must be redesigned using:—

- (a) Lower loop gain, or
- (b) Lower V_{CC} .

$$V_{IN(sat)} = \frac{V_{CC} - V_{CE1(sat)} \left(1 + \frac{R_L}{R_1 + R_2}\right)}{1 + \frac{R_L}{R_1 + R_2} + \frac{R_L}{R_E}} + V_{BE1(sat)} \dots \quad (4)$$

Negative resistor values. If a resistor has a calculated negative value, this is an indication that the parameters required of the trigger are not compatible with the components and supplies used.

The more usual remedies are:—

- (a) Increase V_{CC}
- (b) Widen V_R tolerance
- (c) Use higher- β transistors.

The choice of (a), (b) and (c) depends, as with the other remedies, on the specific trigger considered, and can be determined by experimental substitution of values.

Temperature dependence of V_T . Referring to the expression obtained in Appendix 2, it is clear that the temperature dependent terms are V_{BE1} , I_{CEO1} , I_{CEO2} and α_1 . The change in V_T per unit temperature can then be expressed as in the expression (5) below:—

$$\frac{\partial V_T}{\partial T} = \frac{1}{D} \left[D + \alpha_1 \frac{R_L}{R_E} \left(\frac{\partial V_{BE1}}{\partial T} \right) - R_L \left(\frac{\partial I_{CEO1}}{\partial T} \right) + R_1 + R_L \left(\frac{\partial I_{CEO2}}{\partial T} \right) \right] - \frac{\partial V'_{BE2}}{\partial T} \dots \quad (5)$$

where $D = 1 + \frac{R_1 + R_L}{R_2} + \alpha_1 \left(\frac{R_L}{R_E} \right)$

The effect of $\partial \alpha / \partial T$ is neglected, as this is very much a second-order effect.

Temperature dependence of V_R . This is calculated in a similar manner to that used for V_T , by partial differentiation of the expression derived in Appendix 3. The temperature dependent terms are V_{BE2} , V_{BE1} , β_2 , I_{CEO1} and I_{CEO2} .

$$\frac{\partial V_R}{\partial T} = \frac{1}{A} \left[\left(\frac{R_1 + R_L}{(1 + \beta_2) R_E} - 1 \right) \frac{\partial V_{BE2}}{\partial T} - R_L \frac{\partial I_{CEO1}}{\partial T} + (R_1 + R_L) \frac{\partial I_{CEO2}}{\partial T} \right] + \left(\frac{V_{CC} - A \cdot V_{BE2} (R_1 + R_L)}{A^2 \beta_2^2 R_E} \right) \frac{\partial \beta_2}{\partial T} + \frac{\partial V'_{BE1}}{\partial T} \dots \quad (6)$$

where $A = 1 + R_1 + R_L \left(\frac{1}{R_2} + \frac{1}{(1 + \beta_2) R_E} \right)$

Note: The value of β_2 to be substituted in (5) should be β_{2min} to ensure worst-case design. If the temperature coefficient of β_2 has already been allowed for in the calculation of R_2 , then $\partial \beta_2 / \partial T$ can be put to zero in (5).

Dependence of V_T and V_R on power supply stability. This is found by differentiating the equations derived in Appendices 2 and 3 (or equations 1 and 2)

Fig. 8. Typical $V_{BE} - I_C$ characteristic, showing knee voltage, V'_{BE} .

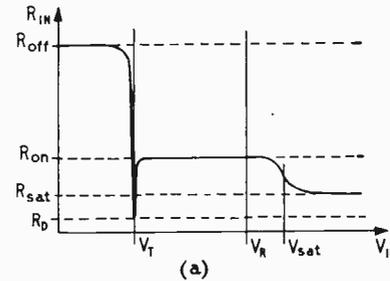
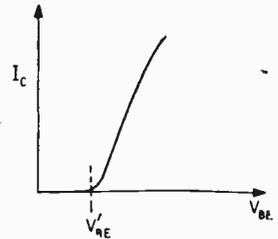


Fig. 9(a). Variation of input resistance with input voltage (V_{IN} increasing).

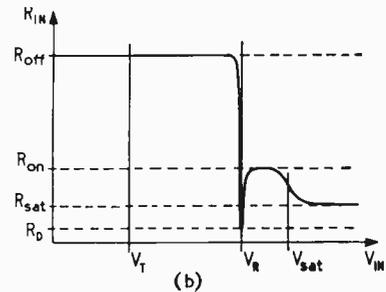


Fig. 9(b). Variation of input resistance with input voltage (V_{IN} decreasing).

with respect to V_{CC} : $\partial V_T / \partial V_{CC} = 1/D$ and $\partial V_R / \partial V_{CC} = 1/A$ (D and A are defined above.)

Input resistance. This depends on the input voltage magnitude and whether it is increasing or decreasing. The characteristics are shown in Fig. 9, and the input resistance is seen to have four main values:

- R_{off} : input resistance with Tr1 non-conducting.
- R_{on} : " " " " conducting.
- R_D : " " " " during regeneration.
- R_{sat} : " " " " with Tr1 saturated.

R_D is derived from the equivalent circuit of Fig. 3, and may be expressed by the combination:—

$$R_D = (G || R_E + r_{E1}) (1 + \beta_1) + r'_{bb1}$$

where $G = r_{E2} + \frac{(R_1 + R_L) || R_2}{1 + \beta_2}$

This equation is useful in computing the loading effect of the trigger on the source.

EXAMPLE

A trigger is to be designed to the following specification:—

- $V_T = 10 \text{ V} \pm 120 \text{ mV}$ at 25°C (drift from $+25^\circ\text{C}$ to be within $\pm 50 \text{ mV}$)
- $V_R = 11.25 \text{ V} \pm 250 \text{ mV}$ over same temperature range.
- $V_{CC} = 24 \text{ V}$
- $I_{C2} = 5 \text{ mA}$
- Source resistance = 200Ω

Transistor parameters:—

$$V_{BE} = 0.7 \text{ V (at 5 mA)} \quad I_{CEO} = 0.1 \mu\text{A (125}^\circ\text{C)}$$

$$V_{BE(sat)} = 0.9 \text{ V} \quad r_e = 27/5 \Omega$$

$\beta = 45-221$ including selection and temperature spread

Substituting in equation (3) gives $R_E = 2.2 \text{ k}\Omega$ (2.2 k Ω)
 (B) ,, $R_2 = 11.1 \text{ k}\Omega$ (12 k Ω)
 (7) ,, $R_L = 1.186 \text{ k}\Omega$ (1.2 k Ω)
 (8) ,, $R_1 = 9.5 \text{ k}\Omega$ (10 k Ω).

Substituting in (A), $\gamma_o = 1.4$ for worst-case conditions of β . Substituting in (4), $V_{IN(sat)} = 14.9 \text{ V}$ which is greater than V_{Rmax} and therefore acceptable.

Test results.

$V_T = 10.00 \text{ V}$ at $+25^\circ\text{C}$ and 9.97 V at $+125^\circ\text{C}$. Change in $V_T = 30 \text{ mV}$.

$V_R = 11.53 \text{ V}$ at $+25^\circ\text{C}$ and 11.42 V at $+125^\circ\text{C}$. Change in $V_R = 110 \text{ mV}$.

V_R value at 25°C is slightly outside the specification since preferred value resistors were used rather than calculated values.

Verification of drift calculation. The V_T temperature effect may be calculated from equation (4). Ignoring the leakage currents as their effect is negligible in this case; $\partial V_T / \partial T = 48 \text{ mV/100 deg. C}$ (assuming $\partial V_{BE} / \partial T = 2 \text{ mV per deg C}$). Thus the calculated change is 48 mV and the measured change is 30 mV .

(To be concluded.)

APPENDIX 1

Refer to equivalent circuit (Fig. 3)


$$\text{Loop gain } \gamma_o = \frac{i_4}{i_1} \alpha_1 = \frac{i_4}{i_3} \cdot \frac{i_3}{i_2} \cdot \frac{i_2}{i_1} \cdot \alpha_1$$

$$\therefore \gamma_o = \frac{R_L}{(R_L + R_1 + R_2 \parallel Z_2)} \cdot \frac{R_2}{R_2 + Z_2} \cdot \frac{(1 + \beta_2) \cdot R_E}{(R_E + Z_1)} \cdot \alpha_1$$

$$\text{i.e. } \gamma_o = \frac{\alpha_1 R_L (1 + \beta_2)}{[(R_1 + R_L) \left(\frac{Z_2^2 + 1}{R_2} \right) + Z_2] \left(1 + \frac{Z_1}{R_E} \right)} \dots \dots \text{(A)}$$

$$\text{where } Z_1 = r_{e1} + \frac{(r'_{bb1} + R_s)}{(1 + \beta_1)}$$

$$\text{and } Z_2 = (1 + \beta_2) \left\{ r_{e2} + \frac{R_E Z_1}{(R_E + Z_1)} \right\} + r'_{bb2}$$

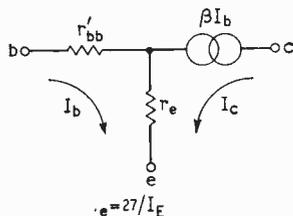

i-equivalent circuit for transistor used in the analysis :-

APPENDIX 2

Applying the superposition theorem to Fig. 6, to obtain an expression for V_{B1} :-

Suppressing I_{C1} and I_{CEO2} :-

$$\text{current in } R_2 = \frac{V_{CC}}{(R_1 + R_2 + R_L)} \therefore V_R = \frac{V_{CC} + V_{BE2} \left(\frac{R_1 + R_L}{(1 + \beta_2) R_E} \right) - I_{CEO1} \beta_1 R_L + I_{CEO2} (R_1 + R_L) - V_{BE2} + V'_{BE1}}{1 + R_1 + R_L \left(\frac{1}{R_2} + \frac{1}{(1 + \beta_2) R_E} \right)}$$

SYMBOLS

V_{CC}	Supply voltage
V_{Bsat}	and V_{IN} . Input voltage which just causes trigger to saturate
V_T	Lower trip voltage
V_R	Upper trip or restore voltage
R_S	Source resistance
β	Current amplification factor* } Common-emitter circuit
r'_{bb}	Internal base resistance
r_e	Internal emitter resistance
V_{BE}	Base-emitter voltage
V'_{BE}	Knee of $I_B - V_B$ curve
V_{CEsat}	Collector emitter saturation voltage
V_{BEsat}	Base-emitter saturation voltage
I_{CEO}	Collector-emitter leakage current
S	Current stability Factor ($\approx 1 + R_S/R_E$)
*	In γ calculations put $\beta = h_{fe}$. In all other calculations put $\beta = h_{FE}$ if known.

Suppressing I_{CEO2} and V_{CC} :-

$$\text{current in } R_2 = \frac{-R_L \cdot I_{C1}}{(R_1 + R_2 + R_L)}$$

Suppressing I_{C1} and V_{CC} :-

$$\text{current in } R_2 = \frac{I_{CEO2} (R_1 + R_L)}{(R_1 + R_2 + R_L)}$$

Adding currents algebraically and multiplying by R_2 :-

$$V_{B1} = \frac{\{V_{CC} - I_{C1}(R_L) + I_{CEO2}(R_1 + R_L)\} R_2}{(R_1 + R_2 + R_L)} \dots \text{(a)}$$

At V_T threshold, $V_T = V_{B1} + (V_{BE1} - V'_{BE2})$

$$\text{From Fig. 6, } I_{C1} = S I_{CEO1} + \frac{\alpha_1 (V_T - V_{BE1})}{R_E} \dots \text{(b)}$$

Combining (a) and (b) and transposing for V_T :-

$$V_T = \frac{V_{CC} + \alpha_1 V_{BE1} \left(\frac{R_L}{R_E} \right) + I_{CEO2} (R_1 + R_L) - S \cdot I_{CEO1} R_L}{\left(1 + \frac{R_1 + R_L}{R_2} + \frac{\alpha_1 R_L}{R_E} \right) + V_{BE1} - V'_{BE2}}$$

APPENDIX 3

Applying the superposition theorem to Fig. 7 in a similar manner to that used for Fig. 6 in Appendix 2, we can obtain an expression for V_{B2} :-

$$R_2 \left[V_{CC} + V_{BE2} \left(\frac{R_1 + R_L}{(1 + \beta_2) R_E} \right) - I_{CEO1} \beta_1 R_L + I_{CEO2} (R_1 + R_L) \right] \\ \frac{R_1 + R_2 + R_L + \frac{(R_1 + R_L) R_2}{(1 + \beta_2) R_E}}{}$$

At V_R threshold, $V_{B2} = V_R - V'_{BE1} + V_{BE2}$

APPENDIX 4

Consider Tr1 off and let input resistance to Tr2 be R . Let voltage at base of Tr2 be at the restore point (i.e. V_R).

Now $V_R = V_{CC} \left(\frac{d}{a+d} \right)$ where $d = R_2 \parallel R$ and $a = R_1 + R_L$, see Fig.

So $V_{Rmax} = \frac{V_{CC}}{1 + \frac{a}{d_{max}}}$ and $V_{Rmin} = \frac{V_{CC}}{1 + \frac{a}{d_{min}}}$

giving $\frac{d_{min}}{d_{max}} = \frac{\left(\frac{V_{CC}}{V_{Rmax}} - 1 \right)}{\left(\frac{V_{CC}}{V_{Rmin}} - 1 \right)} = F$, say.

As $R_2 \parallel R$ and $R = r'_{bb2} + (1 + \beta_2)(r_{e2} + R_E)$

then $F = \frac{R_2 R_{min}}{R_2 + R_{min}} \cdot \frac{R_2 + R_{max}}{R_2 R_{max}}$

(R is given max. and min. values according as β takes max. and min. values). Transposing:—

$$R_2 = \frac{1 - F}{F} \cdot \frac{1}{1 - \frac{V_{CC}/V_{Rmax} - 1}{V_{CC}/V_{Rmin} - 1}} \quad \dots (B), \text{ where } F = \frac{V_{CC}/V_{Rmax} - 1}{V_{CC}/V_{Rmin} - 1}$$

APPENDIX 5


By inspection of the Fig.:—

$$V_{CC} = I_{sat} R_L + V_{CE1sat} + V_{Bsat} - V_{BE1sat}$$


where $I_{sat} = (V_{Bsat} - V_{BE1sat}) \left(\frac{1}{R_E} + \frac{1}{R_1 + R_2} \right) + \frac{V_{CE1sat}}{R_1 + R_2}$.

By substituting for I_{sat} and transposing for V_{Bsat} we have:—

$$V_{Bsat} = \frac{V_{CC} - V_{CE1sat} \left(1 + \frac{R_L}{R_1 + R_2} \right)}{1 + R_L \left(\frac{1}{R_E} + \frac{1}{R_1 + R_2} \right)} + V_{BE1sat}$$

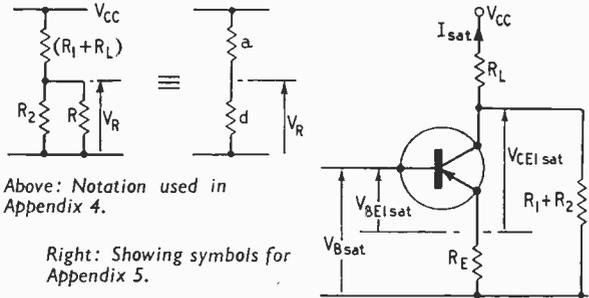

H. F. PREDICTIONS — MARCH

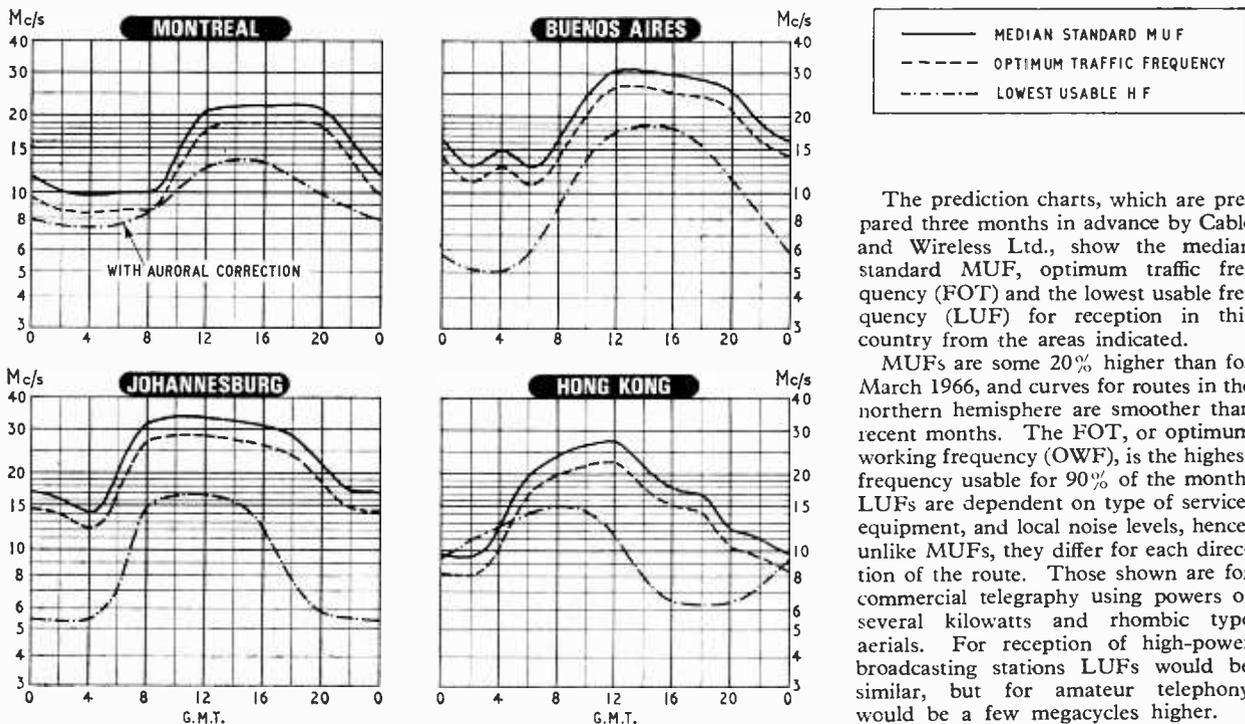

PERSONALITIES

W. A. S. Butement, C.B.E., B.Sc., D.Sc. (Adelaide), who was a member of Sir Robert Watson-Watt's original radar team and has been chief scientist in the Australian Department of Supply since 1949, has left the Department and has joined Plessey Pacific Pty Ltd., Melbourne, as director of research. When he was appointed chief scientist, at the age of 45, he was also given executive charge of the Australian Defence Scientific Service which includes the Woomera Rocket Range. Incidentally, Woomera's main square is named after him. Dr. Butement, who during the latter part of the war was assistant director of scientific research in the U.K. Ministry of Supply, received £1,200 from the Royal Commission on Awards to Inventors for "his contribution to the development of radar installations" which included the "split" method of d.f. and a fire control system using echoes from shell splashes.

It is announced by the Board of Trade, Telecommunications Division, which is responsible for the provision and operation of radar, communications, navigational aids and other electronic facilities for civil aviation and air traffic control, that **W. H. Garnett, O.B.E., F.I.E.E.**, is appointed director of telecommunications in the National Air Traffic Control Services. Mr. Garnett,



W. H. Garnett


who is 50, served his apprenticeship and the early part of his career in the G.P.O. Engineering Department. During the war he served in the R.A.F., attaining the rank of wing commander. He joined the Ministry of Civil Aviation in 1946 and has since served in a number of posts concerned with the development, installation and operation of radio navigational aids, radar, and communications equipment for civil aviation. He was at one time assistant director of electronics research and development (civil aviation) and latterly deputy director of telecommunications.

The 45th award of the I.E.E. Faraday Medal has been made to **Professor H. E. M. Barlow, Ph.D., B.Sc.(Eng.), F.R.S.**, "for his pioneering work in microwave engineering, embracing the development of absolute measurements of microwave power, the investigation of a particular type of low-loss wave guide and its application to long-distance transmission, and detailed studies of surface waves." Professor Barlow, who is 67, became a member of the academic staff in the Faculty of Engineering at University College, London, in 1925. In 1939 he joined the Telecommunications Research Establishment of the Air Ministry, to work on radar development, and later became superintendent of the radio department, Royal Aircraft Establishment, Farnborough. Professor Barlow was recently appointed chairman for six years of the British National Committee for the International Scientific Radio Union (U.R.S.I.). He is a member of the newly formed Ministry of Technology Council for Measurement and Calibration Services, is chairman of its High Frequency Committee and has been a member of the B.B.C. Scientific Advisory Committee since 1953. Since 1963 he has been a director of Marconi Instruments Ltd.

S. E. Clarke, who has been with the Marconi Company since 1946, principally in the Radar Division, and latterly in the International Division of which he was appointed overseas manager in 1963, has now become manager of the division. After war



S. E. Clarke

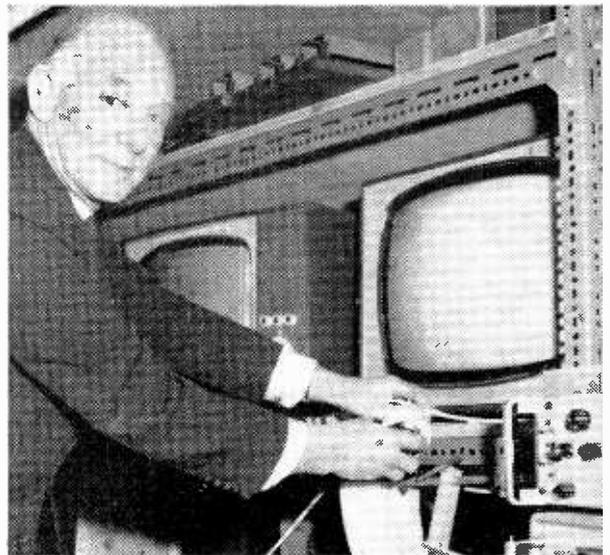

Professor H. E. M. Barlow at work in the laboratory.

service as a radar officer in the Royal Navy Mr. Clarke, who is 46, joined the Marconi Company and played a significant part in the initial formation of the Company's Radar Division. Following the installation of a radar set on the cruiser *La Argentina* during her voyage to South America, he set up a radar training school in Argentina which he ran for four years. In 1951 he returned to England to become a project engineer in the Radar Division in Chelmsford. Two years later he was appointed sales manager in the naval section of the Division.

Miss Rose Winslade, president of the Women's Engineering Society, has been appointed to the staff of the Council of Engineering Institutions. She spent several years on the engineering staff of the Plessey Organization and for the past fifteen years or so in a technical/commercial capacity with Philips Industries. Latterly Miss Winslade was joint manager of the Electronics Division at Research and Control Instruments Ltd., now amalgamated with M.E.L. Ltd.

Dr. Denis Taylor, M.Sc., F.I.E.E., since 1963 head of the UNESCO Mission in the Faculty of Engineering at University College, Nairobi, has been appointed to the new chair of electronic science and telecommunications in the School of Electrical Engineering, University of Strathclyde, Glasgow. He is a graduate of University College, Hull, where he obtained his Ph.D. in radio engineering in 1934 and was a lecturer until 1939 when he joined the staff of the Bawdsey Radar Research Station. During the war he was concerned with the development of radar and for his work on G.C.I. (ground controlled interception) equipment he received an award of £2,400 from the Royal Commission on Awards to Inventors. He

continued in the Government Scientific Service, latterly as head of the Electronics and Instrumentation Division of the Atomic Energy Research Establishment, until 1957 when he joined Plessey Nucleonics Ltd. as director and general manager. In 1962 he was appointed co-ordinator of research and development for the Plessey Group.

Brigadier, E. Holland, B.Sc.(Eng.), M.I.E.E., R.E.M.E., has been appointed director of guided weapons (military) in the Ministry of Aviation in succession to **Brigadier F. W. Grant** who is retiring from the Army. Brigadier Holland, who is 51 and a graduate of Manchester University, joined the Army in 1940. From 1963 to 1965 he was assistant director of electrical and mechanical engineering in the Ministry of Defence and for the past two years has been director of electrical inspection in the Ministry of Aviation.

Jack Bostock, M.I.E.E., director and general manager (operations) of the Sperry Gyroscope Company since 1962, has succeeded **Lionel Jofeh, O.B.E., F.I.E.E.,** as chairman and managing director of the company. Mr. Jofeh who joined Sperry in 1947 as an equipment engineer on naval gunfire control is leaving the company. Mr.



J. Bostock

Bostock joined the company in 1948 as a design engineer (also on naval gunfire control), he became superintendent computer projects in 1955 and in 1958 was appointed engineering manager of the Bracknell, Berks, factory. In 1961 he became group manager responsible for stable platforms and inertial navigation systems and for the past four years has been general manager (operations).

C. F. Machin, B.Sc., F.Inst.P., has been appointed a director of Mullard Ltd., which he joined in 1962. He continues as head of the Mullard Industrial Markets Division, but relinquishes his directorship of Associated Semiconductor Manufacturers Ltd., the joint Mullard-G.E.C. semiconductor development and manufacturing company. Mr. Machin, who is 52, joined the G.E.C.



C. F. Machin



J. A. Jenkins



J. C. Akerman

Research Laboratories in 1931. In 1956 he was made chief engineer of the company's semiconductor department, and two years later he was appointed manager of its semiconductor plant at Stockport, Cheshire.

J. A. Jenkins, M.A., A.Inst.P., at present a director and general manager of Associated Semiconductor Manufacturers Ltd., becomes managing director, and **J. C. Akerman** becomes a director. Mr. Jenkins (47) joined Mullard Research Laboratories in 1947, where he subsequently took charge of the photo-electronics division. He left the laboratories in 1955 to establish the Mullard semiconductor manufacturing division and to head the first of Mullard's specialist transistor factories, at Southampton. When Mullard and G.E.C. merged their semiconductor businesses in 1962 to form Associated Semiconductor Manufacturers Ltd. he was appointed to the board and became its general manager. Mr. Akerman (49) is commercial product manager for all semiconductor devices, including micro-circuits, within the Entertainment Markets Division of Mullard.

Two senior appointments have been made in the Radio Division of Standard Telephones and Cables Ltd. at New Southgate, North London. **E. H. Bruce-Clayton**, who joined the company in 1965 as aviation marketing manager, is appointed aviation planning manager. Succeeding him as aviation marketing manager is **R. D. Stirk**, who recently joined S.T.C. from Rank-Bush Murphy Electronics Ltd., where he was the overseas sales manager. Previously he was with G.E.C. Electronics Ltd.

W. C. Morgan, B.A., F.I.E.E., has been appointed a vice-president of the Andrew Corporation, of Chicago, manufacturers of microwave aerials and associated equipment. He will be responsible for developing the company's operations in Europe, based at a new factory at Lochgelly in Fife. A graduate of Oxford University, Mr. Morgan joined the Royal Signals on the outbreak of war and left in 1953, with

the rank of Lieut.-Colonel, to become a director of E.M.I. Electronics Ltd. In 1963 he joined Elliott Automation Continental S.A.

G. H. Stone, who joined Cannon Electric (G.B.) Ltd. as sales manager in 1957 and has been sales director for the past two years, has become managing director. He succeeds **J. H. Powell** who has resigned but continued as consultant for three months.

J. W. M. Child, B.Sc.(Eng.), a graduate of King's College, London, has been appointed sales manager of G. A. Stanley Palmer Ltd. in addition to being general sales manager of Elmbridge Instruments Ltd., an associate company. Both companies are now located at West Molesey Trading Estate, Surrey.

OBITUARY

J. E. (Dick) Goodwin, B.A., group service manager with British Relay Ltd., died on January 8th aged 61. He joined the company in 1946 (after war service as a Lieutenant Commander in the R.N.V.R.) as service manager of the newly formed p.a. department which later became the Special Services Division. When the company entered the television field he was appointed manager of the Television and Rental Department. In addition to being group service manager he was also a director of a subsidiary company Gem Electrical & Radio Services. Mr. Goodwin had been a member of the council of the Radar & Electronics Association for some years.

Colin H. Gardner, who was with the Mullard Company for 32 years until his retirement in 1961, died on December 27th at the age of seventy. He entered the radio industry in 1921. For many years he handled technical/commercial liaison work with dealers. For the last eight years of his service he managed the Mullard Films & Lectures Organization. Mr. Gardner was a past-president of the Incorporated Practitioners in Radio & Electronics and was an amateur transmitter from 1910 until 1939.

NEWS FROM INDUSTRY

£1M Communications Systems for NATO

TWO transportable communications systems for NATO are being supplied by the Marconi Co. Ltd. and are expected to be fully operational by the 1st April, seven months after the order was placed. Each of these systems will consist of a transmitting station, with a number of transmitters from the MST (Marconi Self Tuning) range, and a receiving station equipped with dual diversity receivers. Frequency changes can be achieved in seconds, by the operation of decade dials, and tuning is automatic. The two stations within each system will be connected to each other by multi-channel microwave links. Operating within the area of Allied Command Europe, these systems will provide h.f. communication for SHAPE in Belgium, and the headquarters of AFBENT (Air Forces Central) in Holland. Altogether 18 transmitters and 15 receivers will be employed and each system has been designed to fit into a transportable container complete with microwave links, telephone and telegraphy channelling equipment, teleprinters and control apparatus. Aerials and high-power cable networks with power supplies are also to be supplied by Marconi.

Microwave equipment for "Starnet," the 15-station radio relay system which will enable the telecommunications network of the British Army of the Rhine "to be rationalized and to provide facilities to meet the increased demands imposed by sophisticated equipment in the Army," is to be supplied by Marconi. Initially, the system, which will cost some £500,000, will cater for 120 speech channels over a single radio path but could be expanded to 300 channels. Provision will be made for it to handle telephone, telegraph and data transmission.

Flight trials of a new air defence system developed by British Aircraft Corp. in conjunction with Decca Radar Ltd., are now in progress. Decca is completing the development of a target detection radar and a command transmitter for this ET316 system, which will be known as "Rapier." It is believed to be the world's most advanced low-level air defence system capable of detecting aircraft and helicopters flying at heights from tree-top level to several thousand metres. The target detection radar is fully automatic, and unskilled personnel can be quickly trained to operate the system in the field. The equipment is housed within a mobile launcher which carries a rotatable platform for four missiles.

Standard Telephones and Cables radio altimeter type STR70-P is to be fitted in place of American equipment in the Phantom F-4Ks and F-4Ms to be supplied by the McDonnell Aircraft Corp. to the Royal Navy and R.A.F. This solid-state radio altimeter, which was wholly developed by S.T.C. in the U.K., is frequency modulated, is designed for low level operation and can be used for automatic landing. The order is worth approximately £210,000.

The fully-automatic landing system, jointly developed by British Aircraft Corporation and Elliott-Automation, is to be fitted in all B.O.A.C.'s Super VC10s. This was announced after over a year's experimental use of the system on a specially equipped VC10 during which it had made over 560 fully automatic landings.

Doppler Navigators are to be fitted to the nine Boeing 707s in the service of Air India, through an order placed with the Marconi Co. Ltd. This order, worth nearly £250,000, includes test equipment, spare components and sub-units. It is expected that by mid-1967, each of these international jets will have a single Doppler sensor and track guide computer installed to provide the crew with accurate basic navigational information, independent of ground-based aids.

A symbol-writing waveform-generator is to be developed by Specto Avionics Ltd. in co-operation with the Royal Aircraft Establishment, Farnborough. This instrument will be used in the development of electronic displays for aircraft cockpits with particular emphasis on head-up displays. In its present experimental form the generator allows the operator to "write" as many as ten symbols for simultaneous display. Some of the symbols which can be formed are alpha-numeric, linear, ramps, triangles, thermometer scales, and circles, all of which may be modified, or erased and re-written as required.

Empresa Nacional de Telecomunicaciones (TELECOMS), the Colombian telecommunications authority, has given an order worth over £250,000 to S.T.C. Ltd., for the supply and installation of h.f. radio communication equipment. An S.T.C. "Stanfast" system, to be installed by the autumn of 1968, will give TELECOMS remote controlled operation for its international telephone and telegraph services. At El Rosal—on the Bogota plateau—a station will be equipped with five 30 kW and five 3 kW auto-tune transmitters, drive units, log periodic aerials for horizontal and vertical polarization, and an automatic

system for coaxial switching of transmitter and aerials. The San Juan receiver station (east of Bogota) will be equipped with five "Stanfast" auto-tune receivers with extended control facilities, and will operate with log periodic aerials designed for the service. Transmitting and receiving stations will each be manned by one operator.

Transitron acquire Lemco.—An agreement between the London Electrical Manufacturing Co. Ltd. (Lemco), and Transitron Electronic Corporation, Wakefield, Mass., U.S.A., permits Transitron to acquire all the assets of the British company for Transitron stock. This agreement includes an additional facility in Northern Ireland, 50% of which is owned by Lemco. The company, which recently closed its factory in S.W. London and is now concentrated at Beavor Lane, London, W.6, will operate as a wholly owned subsidiary of Transitron under its present management.

Aveley Electric Limited, South Ockendon, Essex, have signed an agreement with **Metronex, of Poland**, for the exclusive selling rights in the U.K. of five electronic instruments made by Unipan, a subsidiary of the Polish Academy of Science.

Den Norske Hoyttalerfabrikk, the Norwegian manufacturers of **D.N.H. loudspeakers**, are to be represented in the U.K., and their products marketed by, Highgate Acoustics, 71-73 Great Portland Street, London, W.1.

Hivac Limited, of South Ruislip, Middx., a wholly owned subsidiary of the Plessey Company, will no longer trade under its present full corporate title. It will, in future, be known as the **Hivac Division** of the Components Group of the Plessey Company.

Nand-Nor Electronics Ltd. has been formed by Charles Corner, formerly plant manager for SGS-Fairchild. The company, with headquarters at 43 Chantry Way, Billericay, Essex, is developing digital instruments and will undertake the engineering and development of instruments and controls to specifications.

Lisle Instrument Systems Ltd., of Toronto, are to manufacture under licence and sell throughout Canada the **Elremco** range of industrial timing and remote control equipment of Electrical Remote Control Company of Harlow, Essex.

Erratum.—It is regretted that because of a printer's error, the opening sentence of the third paragraph in the right-hand column, on page 88, of the February issue, did not make sense. It should have read "A teleprinter with a print-out speed of 3,000 words per minute..."


TRAVELLING-FIELD FUNCTION GENERATORS

ANALOGUE/DIGITAL CONVERTER IN SINGLE PELLET OF BULK SEMICONDUCTOR

A NEW class of semiconductor devices in which functions of time can be generated by electric-field domains travelling through bulk semiconductor material is being developed by Standard Telephone Laboratories. Experimental analogue-to-digital converters have been devised using the technique—known as “domain originated functional integrated circuits” (DOFIC)—and the company say they foresee further extensive application possibilities “including perhaps entirely integrated television camera and display systems.”

The electric-field domains are launched in the bulk material when a d.c. bias voltage applied across it exceeds a certain threshold value, and they travel through the crystal, which is typically a few hundredths of an inch long, at velocities up to 10^7 cm/s. The conduction path through the material is shaped, however, by doping or alterations in cross-sectional area, to give a variation of conductivity along its length. Thus, as a travelling domain encounters these regions of different conductivity, the current through the device varies correspondingly and it is this varying current which forms the output waveform.

Although the “conductivity profile” built into the device constitutes a static characteristic, the normal output current waveform can be modified by dynamic control (i.e., while a domain is in motion) by varying the instantaneous bias. Thus, a domain can be arrested at any point along the conduction path. Furthermore, the point along the path at which the domain is removed can be made, for example, proportional to the applied bias, by introducing an overall slope or taper into the profile.

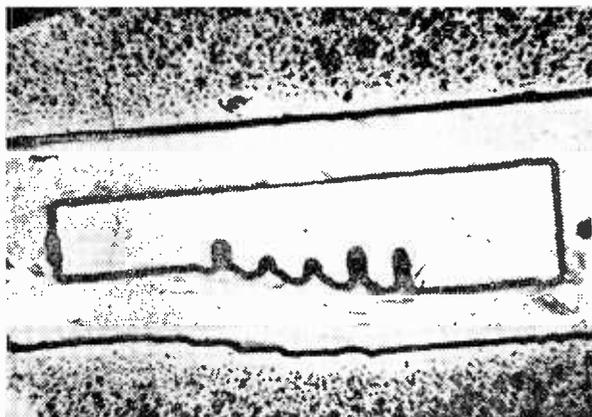

The picture shows the epitaxial construction of a four-level analogue-to-digital converter. In this the number of output current pulses obtained is proportional to the applied bias. The “digital” profile which produces the pulses and the overall slope can be seen. S.T.L. say that a 64-level, 6-digit converter using a 2-mm long drift path in gallium arsenide seems quite feasible.

A drawback in the S.T.L. devices using the present method of domain formation (inter-valley transfer of hot electrons from lower to higher effective mass states) is

that bit rates, determined by the domain velocity of 10^7 cm/s, are at microwave frequencies. However, by using other types of domain formation (e.g., electron-phonon coupling) these can be reduced, it is stated, by a factor of 100 or more.

In addition to obtaining the output waveform from the current through the device it is possible to make use of the high electric fields due to the domains: these can be readily picked up by electrodes placed sufficiently near to the surface of the semiconductor. Thus, it is possible to have a completely separate electrode system bearing any additional code profile, etc., electrostatically coupled to the domain. The sweeping domain will then produce output potentials as it moves past the electrode, which can be shaped to produce any desired time spacing of the output pulses.

It is also possible to obtain optical read-out by detecting light excited by the domain as it passes through the crystal. This raises the prospect of completely different types of display device that might well be applied to television engineering.

Bio-Engineering Show

MEDEA—67, the International Medical Engineering and Automation Exhibition sponsored by the Electronic Engineering Association and the Scientific Instrument Manufacturers' Association, will be held at Earls Court, London, from March 13th to 17th. In association with the exhibition there will also be the second European Symposium on Medical Electronics at which some forty papers will be presented; many of them from overseas.

The exhibition will be open from 1000 to 1800 (except on the 16th when it will close at 2100), and admission will cost 3s or by invitation card obtainable free from exhibitors; a list is given below.

A.B. Optimus Anchorverken
Alvar Electronic
B & K Instruments
Barr & Stroud
Beckman Instruments
Bell & Howell
(Consolidated Electrodynamics)
Boers, Jan
Bosch Elektronik
Cardiac Recorders
Compagnie des Compteurs
Corbin-Farnsworth Inc.
Data Laboratories
Devices Sales
Disa Electronic
Disc Instruments
E.M.I. Electronics
Electronic Associates
Electronic & X-ray Applications
Elliott Medical Automation
Epsylon Industries
Esterline Angus Instrument Co.
Flaig, W. G., & Sons
Fox, C. J., & Sons
Hewlett Packard
Honeywell Controls
How, James, & Co.
Ingenjorsfirman Besam A.B.
Instrumentarium
Joyce, Loebel & Co.
Kent, George
Kent Industrial Instruments
Kimal Scientific Products
Laboratory Equipment Digest

Lan Electronics
Lexington Instruments Corp.
Lucas
Medicor
Medtronic Inc.
Metrimpex
Morgan, P. K.
Nicholas Products
Nuclear-Chicago Europa N.V.
Nuclear Data Inc.
Officine Toscane Elettromeccaniche
Pergamon Press
Picker International Corp.
Pitman, D. A.
Polaron Equipment
Precision Instrument
Quartz & Silice
Rimbach Publications
Röntgen, Emisa
S.E. Laboratories
Shackman, D., & Sons
Shandon Scientific Co.
Srerex
Sonasales
Spemby Technical Products
Statham Instruments
T.E.M. Sales
Technical Measurement Corp.
Telco S.A.
U.K. Atomic Energy Authority
Vickers
W.T.W.
Wireless World and Industrial
Electronics

Tracking Russian Satellites

NEW DOPPLER METHOD TAKING ADVANTAGE OF COSMOS SATELLITE F.S.K. TRANSMISSIONS

By G. E. PERRY,* B.Sc., A.Inst.P.

Kettering Grammar School came in for a good deal of publicity recently when it was revealed that a group of boys and their science masters had tracked a number of Russian Cosmos satellites and located their launching sites. The observation techniques were devised by the school's senior physics master, who describes them in this article.

METHODS of receiving radio signals from artificial satellites and using the Doppler effect to determine the time of closest approach (hereafter referred to as c.a.) were described shortly after the first Sputniks were launched. A typical Doppler curve is shown in Fig. 1. Because of the motion of the satellite, the signal, when first received, appears to have an increased frequency as the satellite approaches the receiving station. This gradually falls to the true frequency when the satellite is at c.a., at which instant the rate of change of frequency is most rapid, and goes on falling as the satellite travels away.

The transmissions on 19.995 Mc/s from the Russian Cosmos satellites (which are recovered after eight days in orbit) are not on a single frequency as were those from the earlier Sputniks. Frequency-shift keying, with a repeating pattern similar to that shown in Fig. 2, is employed, the difference between the two radio frequencies being approximately 900 c/s. This makes analysis by the normal method¹ difficult, and a further difficulty arises from the fact that the transmissions are not continuous, but are commanded from ground stations within the Soviet Union. This means that the satellite must be above the horizon of the command station to allow it to be switched on, and at this switching on time it is well above the horizon of our receiving station at Kettering, Northants. Consequently it is not possible to obtain the complete Doppler curve at Kettering—indeed it often happens that the satellite is beyond c.a. when the signals start.

It will be seen that the amount of frequency-shift and the Doppler shift on 20Mc/s are approximately equal. Use is made of this fact to obtain the time of c.a. easily. Fig. 3 shows the Doppler curves of both frequencies and also the setting of the receiver local oscillator at the true frequency of the higher one. This setting is made by adjusting the local oscillator, while the satellite is still approaching, until the two audible beat-frequency tones (heard as pulses of tone) are in unison—the f.s.k./Doppler-shift equality automatically ensuring that the local oscillation is sited at the true signal frequency, as indicated in Fig. 3. Although at first sight this may

seem a crude technique, the human ear is a good detector of small frequency differences and the setting can be made quickly and with some accuracy.

Now consider what is heard as the satellite transit proceeds. The a.f. notes produced are the difference frequencies between the received signals (with their associated Doppler shifts) and the stable frequency generated by the local oscillator. The difference between the higher signal frequency and the local oscillator decreases as the satellite approaches and the pitch of the audible note falls correspondingly, the rate of fall increasing as the satellite nears c.a. When the difference drops below 30 c/s the note becomes inaudible and passes into "zero-beat." The received frequency continues falling as the satellite goes away and when the difference again reaches 30 c/s, a rising note appears out of "zero-beat" and goes on rising. The lower of the two frequencies is already below the local oscillator frequency at the start and, as it drops still further, the difference increases and a rising note is heard for the whole time. This is shown diagrammatically in Fig. 4.

With a near-overhead transit and its associated rapid Doppler effect, the two unison notes initially diverge; one rises continuously while the other falls, passes through "zero-beat," being inaudible for up to 40 seconds, and then reappears and rises also. By taking the mid-time of "zero-beat" as c.a. an error of less than ± 30 seconds is introduced.

These particular Cosmos satellites are commanded to transmit only on orbits which take them eventually over Russian territory. Thus they transmit only on northbound transits across the U.K. which take place in daylight, and not on the later southbound transits. This knowledge, together with the inclination of the orbit to the equator, which is given in the Tass announcement of the launch, is sufficient to locate the position of the satellite.

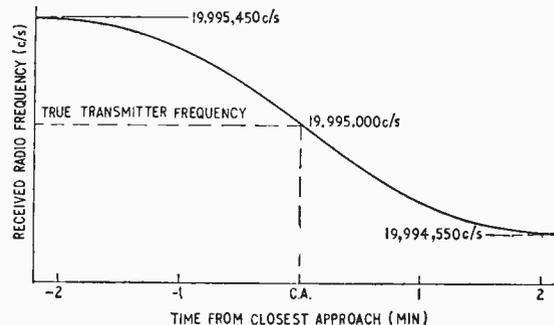


Fig. 1. Normal Doppler curve for satellite with single-frequency transmission. The true frequency is received at the time when the spacecraft is closest to the receiving station, as indicated by the broken lines.

* Senior Physics Master, Kettering Grammar School.

Fig. 2. Typical sequence of frequency shifting of signal from 8-day Cosmos satellite. The sequence repeats after a burst of approx. 20 short pulses (Based on transmissions from Cosmos 126).



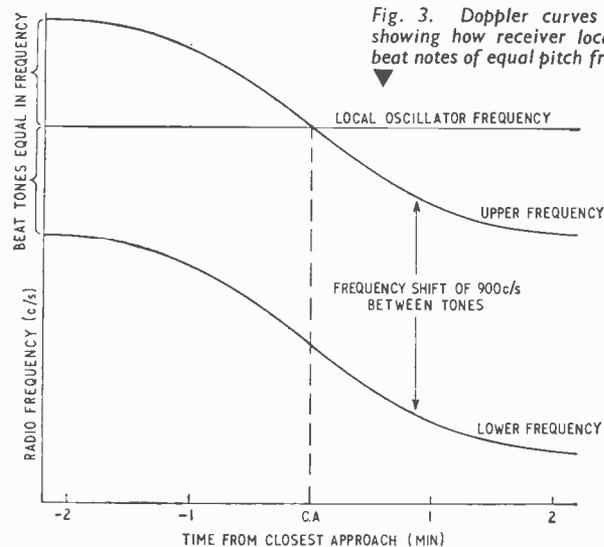


Fig. 3. Doppler curves of frequency-shift satellite transmission showing how receiver local oscillator frequency is set to give a.f. beat notes of equal pitch from the upper and lower radio frequencies.

Fig. 4. Variation of a.f. difference frequencies. Note period of inaudibility of one tone as upper r.f. passes through value giving zero beat.

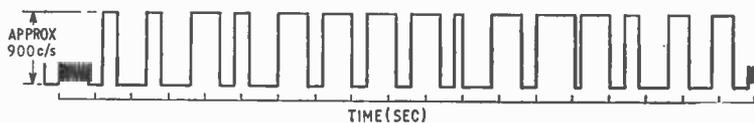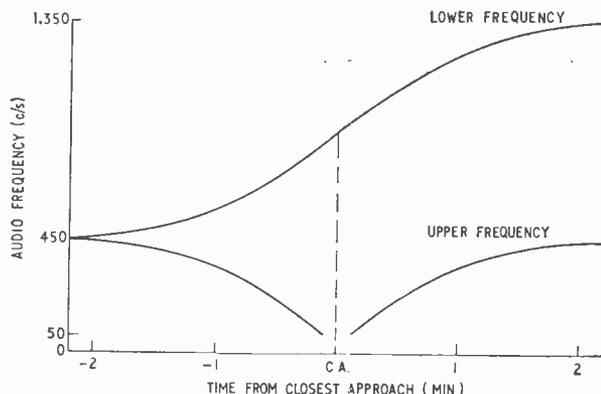

The difference between c.as on successive days, divided by sixteen, gives the orbital period to within ± 0.1 minute. This enables the track separation (angle through which the earth rotates between successive transits) to be calculated, due allowance being made for the rotation of the orbital plane about the earth's axis under the influence of the equatorial bulge.

For orbits inclined at 65° to the equator, it can be shown that a transit passing over Kettering will have its northern apex at 52°E . Working back from the time of c.a. (plus eight minutes to reach apex) and this assumed longitude, the period and separation are repeatedly subtracted until the launch day is reached. At this point another assumption is called for; with a launch from the usual Aral Sea complex, the initial northern apex occurs at 125°E . When a longitude lying between 113.5° and 136.5°E on the launch date is reached, it is known that this is the initial orbit. The longitude is then set to 125°E and calculations are made forward from this by repeatedly adding on the period and track separation until the 128th revolution is reached on the eighth day—the usual recovery time. For this work a manually operated desk calculator is available but an Algol computer programme has been devised and, on occasions, used on a local digital computer.

It was the output from the computer which revealed that Cosmos 129, launched on 14th October 1966, had obviously not come from the Aral Sea. The revolution numbers obtained differed by three from those given by American predictions. Since longitudes and times agreed, it was clear that the source of error lay in the programme itself and that the 125°E should, in this case, have been nearer 60°E . This implied that the satellite had either been launched from a more northerly Russian site or from central France! On 21st April 1966 I had suggested in a letter to *Flight International* (an associate journal of *Wireless World*) that the 72° satellites, Cosmos 112 and Cosmos 114, had been launched from a new site



The tracking station at Kettering Grammar School.

near the Arctic Circle. I was now able to plot the initial orbits of these satellites and Cosmos 129 on the same map and see where they intersected. This occurred at 63°N , 41°E , a point south of Arkhangelsk—even so, a possible inaccuracy of ± 1 must be allowed in both latitude and longitude. The co-ordinates were announced at the Autumn Meeting of The British Interplanetary Society and in *Flight International*.

REFERENCES

1. Osborne, J. M. *Short Wave Mag.*, 15, Nov. 1957, p. 459.
2. Osborne, J. M. *School Science Review*, 39, Mar. 1958, pp. 244-253.
3. Perry, G. E. and Slater, J. D. *Spaceflight*, 4, Nov. 1962, pp. 198-200.
4. Perry, G. E. *Spaceflight*, 8, Sept. 1966, p. 336.

BOOKS RECEIVED

An Anthology of Philips Research, edited by H. B. G. Casimir and S. Gradstein. Compiled to celebrate the 75th anniversary of the Philips company, this volume consists of a collection of papers on a very wide range of subjects in which Philips have interests. It is essentially for browsing rather than for serious cover-to-cover reading. The majority of the papers are written on developments since 1950 and many of these will be of interest to readers of *Wireless World*. The first part of the book provides historical background from 1891 to 1951 and includes descriptions of research into the gas filled lamp, physics and solid state chemistry. The second part consists of 17 representative papers covering such subjects as delta modulation, Ferroxdure II and III, stereo, reverberation, the gyrator, projection of colour television pictures, orthocyclic coil winding, the alloy-diffusion technique for transistors, and Plumbicon camera tubes. The third and final part, entitled "miscellaneous contributions", contains 20 papers on electronic, chemical and associated subjects ranging from the evolution of permanent magnets to a description of a gas laser. This well illustrated book is printed on good quality paper; page size 9in x 11in. Pp. 469. Price 37s. Centrex Publishing Company, N.V. Uitgeversmaatschappij Centrex, P.O. Box 76, Eindhoven, The Netherlands.

Marine Radio Manual, by G. L. Danielson and F. C. Mayoh. Although this book is primarily intended for those preparing for the P.M.G. 1st and 2nd Class certificates with the aim of becoming ships radio officers, it should also prove suitable for anyone who wishes to make a study of radio starting from first principles. The first twenty-four chapters are devoted to basic theory including a.c. & d.c. principles—machines—valves—transistors—power supplies—oscillators—a.f. & r.f. amplification—frequency modulation—c.r.t.s. and propagation. Final chapters describe marine Auto Alarm—Lifeboat—direction finding—and transmitting and receiving equipment. An appendix includes useful mathematical information and a number of typical questions taken from P.M.G. Certificate examination papers. Pp. 621. Price 80s. George Newnes Ltd., Tower House, Southampton Street, London, W.C.2.

Electronic Sensing Devices, by A. F. Giles. A non-mathematical treatise on the various physical-electronic and chemical-electronic methods of sensing temperature, pressure, flow and other parameters associated with industrial control engineering. Presented under the following headings, solid-state, electrolytic, gaseous ion, capacitive, and magnetic sensors; electronic sensors for physical quantities; and electronic sensors for chemistry; this book ends with a list of manufacturers in the field. Pp. 158. Price 45s. George Newnes, Tower House, Southampton Street, London, W.C.2.

Transistor Bias Tables, by E. Wolfendaie. These computer compiled tables should be of great use to the designer and experimenter who wishes to arrive at near optimum values for the three bias resistors used in a conventional transistor amplifier. These resistor values are derived from tables which take into account a large number of combinations of supply voltage, collector current, junction temperature, transistor gain, etc. Pp. 71. Price 21s. Iliffe Books Ltd., Dorset House, Stamford Street, London, S.E.1.

Fluctuations of Stationary and Non-Stationary Electron Currents, by C. S. Bull. The early part of this book is devoted to a discussion that assumes that the electric field is discontinuous and examines the consequences of this assumption. This is followed by an explanation of the various types of electrical fluctuations and the necessary mathematics. In the final six of the 13 chapters subjects such as Heisenberg's uncertainty principle, the effect of assumptions in fluctuation theory and the characteristics of a planar diode are examined in detail. Pp. 217. Price 68s. Butterworth & Co. Ltd., 88, Kingsway, London, W.C.2.

Semiconductors, Vol. 1, Physics and Electronics, by E. J. Cassagnol (from the Philips Technical Library). Starting with a study of the physical properties of semiconductors, this book goes on to consider the transistor as an active device. H.F. and l.f. equivalent circuits, and bias networks are discussed in some detail as is the use of the transistor as a switch. Pp. 310. Price 72s. Cleaver Hume Press Ltd., Little Essex Street, London, W.C.2.

AUDIO FAIR TICKETS

THIS year's International Audio Festival and Fair will again be held in the Hotel Russell, London, W.C.2, from March 30th to April 2nd. There will be a record number of 88 exhibitors, most of whom will have demonstration rooms as well as stands. The first day from 1100 to 1600 is reserved as a trade preview. Admission later that day and on the other days (1100-2100; Sunday 1100-2000) is by ticket (admitting two) which can be obtained from exhibitors or from this office. Requests for tickets must be accompanied by a stamped-addressed envelope.

MARCH

CONFERENCES & EXHIBITIONS

Further details can be obtained from the addresses in parentheses.

LONDON

- Mar. 13-17 Savoy Place
Air Traffic Control Systems Engineering
 (I.E.E., Savoy Pl., W.C.2)
- Mar. 13-17 Earls Court
Medical Engineering & Automation Exhibition (Medea)
 (Electronic Engineering Assoc., 11 Green St., W.1)
- Mar. 14-16 King's Head, Harrow
Public Address Exhibition
 (A.P.A.E., 394 Northolt Rd., South Harrow, Middx.)
- Mar. 30-Apr. 2 Hotel Russell
Audio Festival and Fair
 (C. Rex-Hassan, 42 Manchester St., W.1)

CANTERBURY

- Mar. 30-31 The University of Kent
Transport Properties of Superconductors
 (Inst. P. & Phys. Soc., 47 Belgrave Sq., London, S.W.1)

OVERSEAS

- Mar. 1-3 Washington
Particle Accelerator Conference
 (I.E.E.E., 345 E. 47th St., New York, N.Y. 10017)
- Mar. 5-14 Leipzig
Spring Fair
 (Leipziger Messeamf, Post Box 329, Leipzig)
- Mar. 9-14 Paris
Festival du Son
 (S.I.E.R.E., 16 rue de Presles, Paris 15e)
- Mar. 20-24 New York
I.E.E.E. International Convention & Exhibition
 (I.E.E.E., 345 E. 47th St., New York, N.Y. 10017)
- Mar. 22-24 New York
Symposium on Modern Optics
 (Polytechnic Inst. of Brooklyn, 333 Jay St., Brooklyn, N.Y. 11201)

Point-to-Point Review, 1966

By DAVID WILKINSON,* B.Sc., M.I.E.E.

THE improvement in h.f. conditions noted in 1965 was maintained during 1966 and was largely due to the increase in values of sunspot number and ionosphere index (IF2). The predicted value of the latter for December 1966 was 66, compared with 26 for the same month in 1965. However, the rate of increase in solar activity was much slower than at the same phase of the previous sunspot cycle and, during the second half of the year, the provisional sunspot number showed very little change from month to month.

Professor Waldemeir, of Zurich, forecasts that the next maximum is likely to occur in the autumn of 1968 with a sunspot number in the region of 100, which is considerably lower than the 1957/58 value. The Greenwich provisional monthly mean sunspot number for 1966 was 50.4 compared with 15.3 for 1965.

Twenty-one sunspot groups of area equal to, or greater than, 500 millionths (approximately 585 million square miles) of the visible solar hemisphere were reported. Of these, five were of area 1,000 millionths or greater, the largest reaching 1,500 millionths during its passage across the sun's disc, December 5th-17th.

Forty-six sudden ionosphere disturbances (Dellinger fades) were reported during 1966. Many were of a minor nature and had little effect on h.f. circuit operation. March, July and September were the months during which most of this activity occurred, with 7, 9 and 11 fades respectively. There was a slight increase in the level of magnetic activity in 1966, the monthly mean Hartland "C" value† for the year being 0.57 compared with 0.49 for 1965. Increased activity during the second half of the year was largely responsible for this, several more prolonged disturbances occurring during this period. The effect of these disturbances were generally masked, however, by the use of suitably lower frequencies at critical times and h.f. communication was usually not seriously affected.

The increase in sunspot activity and values of IF2 (well shown by the smoothed values in the graph below) resulted in higher MUFs and the influence of sporadic E on circuit operation was less marked.


As was to be expected, most h.f. circuits showed an increase in efficiency compared with 1965 and the monthly average percentage efficiency of four representative circuits using ARQ (automatic error detection and correction) and received in this country was 92.9 as against 91.0 for 1965. This implies an unprotected efficiency of over 99% (as the ARQ equipment uses up eight characters to correct each mutilated character).

The Early Bird satellite continued in use, and exceeded its expected life of 18 months in October. In Octo-

ber the first Intelsat II satellite was launched but, due to a failure of the apogee motor, did not reach the intended synchronous orbit. The electronics equipment, however, operated satisfactorily and enabled useful tests to be carried out.

Earth stations were completed on Ascension Island, Grand Canary Island and at Andover, Maine, to make use of the Atlantic Intelsat II satellite and at Carnarvon (Western Australia), Paumalu (Hawaii) and Brewster Flats (Washington) to use the Pacific Ocean Intelsat II satellite. These stations were primarily built to carry channels for the NASA Apollo project.

Many other earth station proposals were announced. 1967 should see a large increase in this number.

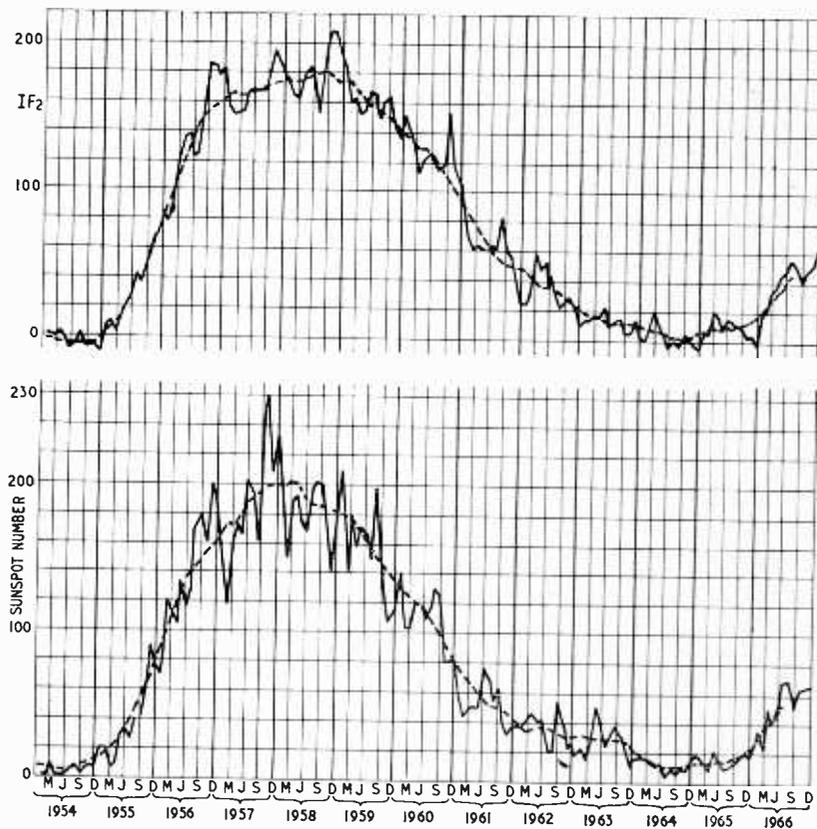

The monthly figures and smoothed values of the IF2 (upper graph) and the sunspot number for the past thirteen years.

* Cable & Wireless Ltd.

† The daily mean of the "K" values recorded every three hours at Hartland, Devon.

Common-Frequency Radio Relaying

EXPERIMENTS WITH "SYNCHRONOUS STABLE RELAYING" DEMONSTRATE METHOD OF EXTENDING THE RANGE OF FIXED AND MOBILE COMMUNICATION SYSTEMS

By J. R. BRINKLEY, M.I.E.R.E.

SINCE the earliest days of radio communication engineers have faced a serious obstacle when the range of communication required exceeds the "natural" range of a single station. In point-to-point systems the problem is normally solved by relaying the original transmission on a second frequency. This solution is quite satisfactory for such systems, provided the extra frequencies required are available.

It would, of course, be preferable to relay without changing to a new frequency but attempts to do this in the past have run into two serious difficulties. First, if direct radio pick-up is attempted, it is difficult to prevent the relay transmitter from feeding back to its pick-up receiver. Feedback of this kind causes the relay station to go into self oscillation. Secondly if the relay station is connected by telephone line it is difficult to synchronize the stations perfectly. In this case a further difficulty may occur due to heterodynes and interaction distortion between the two stations.

In mobile systems, additional difficulties occur when the range required is beyond the capability of a single station. In this case the use of further frequencies for relaying gives rise to need for multichannel "switchable" mobile equipment. This adds considerably to the cost and complexity of manufacturing and servicing the mobile equipments.

Worse than this, however, a serious operational confusion arises. As mobiles pass from the coverage area of one station to another, their operators have to remember to change to the appropriate channel. This is far from easy for the operator. The coverage pattern for the different stations particularly at higher frequencies is diffused, especially in hilly and built-up areas, and much confusion can arise as a result. The task of the central station operator is also rendered more difficult. He has no certain way of knowing the channel disposi-

tion of the various mobiles in the total area and does not readily know which station to activate in order to contact a particular mobile.

In view of these difficulties the advantages of a system which could relay on the same frequency without going into oscillation would be outstanding and may be summarised as follows:—

(1) It would enable the range of a single-frequency transmission to be extended almost indefinitely by relay after relay.

(2) It would enable a substantial economy of frequency allocation to be achieved.

(3) It would avoid the unrewarding approach of using very high power in single station schemes to strain coverage to the limit.

(4) It would enable system engineers for the first time to "tailor" the coverage to the social and geographical needs of the system.

(5) It would simplify mobile equipment and its operation by avoiding the need for multichannel mobile equipment.

The recent development of reliable solid-state u.h.f. equipment operating in the 450 Mc/s band led to a re-examination of these problems, for three reasons. First, highly stable relaying equipment has as a result become a much more practical proposition. Secondly, directional aerials are much more effective and manageable than at lower frequencies.

The third reason for re-examination has been that the relaying problem previously described has recurred in a rather acute form in some of the many u.h.f. pocket radio telephone systems now being established for the police services and for other purposes. In these systems a single station scheme has a typical range of several miles. If coverage at greater distances is required then one is faced with the age-old problem of how to extend the range. The new form of the problem is acute because of the obvious disadvantages of a multichannel pocket equipment and the particular kind of operational confusion arising in the overlap areas between stations in such systems in confined and built-up areas. It was as a result of these problems that it was decided to evolve and test the new system known as "synchronous stable relaying" or s.s.r.

The basic idea was to pick up the original signal, to amplify it in a relatively high-gain amplifier without overall change of frequency and to re-radiate in such a manner as to minimize back coupling. The equipment arrangement is shown in Fig. 1. It comprises a completely solid-state equipment arranged to heterodyne the received signal down to an intermediate frequency. This is passed through a crystal filter, amplified and stepped up again to the precise original frequency, which is in turn amplified. A relay equipment of this kind can, it is found, have a stable gain of as much as 140 dB with-



J. R. Brinkley, who has been managing director of Pye Telecommunications Ltd. since 1956, received his early training at the Post Office Research Station. During the war he was seconded to the Home Office where he was responsible for the development of many of the first mobile radio systems. He joined Pye Telecommunications Ltd., in 1948 and was appointed technical director the following year. Mr. Brinkley is a member of the P.M.G.'s Frequency Advisory Committee.

out presenting practical difficulties in itself. It can also be designed to meet British Post Office and American F.C.C. specifications in full; an important consideration.

In order that the station shall be effective as a relay it is, in addition, necessary to ensure that the radiated output is isolated from the pick-up aerial by a loss of 100 dB or more. This is achieved by four techniques. First, a directional pick-up aerial of fairly conventional design is used. Secondly, the "retransmit" aerial is arranged to have low backward radiation in the direction of the pick-up aerial. Thirdly, polarization is changed through 90°. This last feature calls for a mobile aerial sensitive to vertical and horizontal polarization, but this is not difficult to arrange at u.h.f. Lastly, a reasonable space factor is inserted between the two aerials in the form of a horizontal spacing typically of the order of 50 to 150 feet.

The success of such an arrangement can only be verified in practical field conditions. In particular, without practical field trial it might be expected to be vulnerable to oscillation via unwanted feedback due to multiple site reflections. A series of tests of relays on "bad" sites, that is in built-up areas in Cambridge and London, has shown that this consideration does not in practice cause difficulty. To date a variety of relaying sites have been tried. No special or critical aerial adjustments have proved necessary and the test systems have been set up at each new site, tested in a few hours and without any instability troubles arising. (See Fig. 2.) Working gains of 120 dB have been typical.

In operation the retransmitted signal is found to be indistinguishable except in increased strength from the original. The signal input to the pick-up receiver is high and thus the signal-to-noise ratio at the output is also high. A large number of such stations in series over a long route would, therefore, appear to be eminently practical.

Surprisingly, interaction and distortion effects in the equi-signal overlap areas are absent. Calculation shows, however, that path length differences between the original and relayed transmission are small. Interaction distortion is not in fact to be expected and is not in the event experienced. Rather more surprisingly, however, the two fields seem to be additive in nearly every situation and, indeed, employing both listening and measurement tests, it has been very difficult to detect any locations at which positive addition of the two signals does not take place. This result must be due to the diffuse nature of u.h.f. propagation, especially in built-up areas, and to some extent to the change in polarization on retransmission. Further investigation into this interesting discovery is obviously desirable but tests so far conducted indicate the interaction problem has at last been overcome.

In the systems tested the originating transmitter had a power of 5 watts. The relay power has been in the region of 0.5 watt. Relay stations of 5 watts are under construction and the systems have adequate margin of

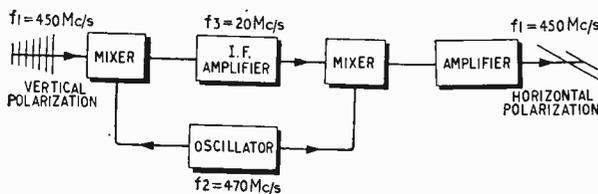


Fig. 1. Schematic of a synchronous stable relay station.

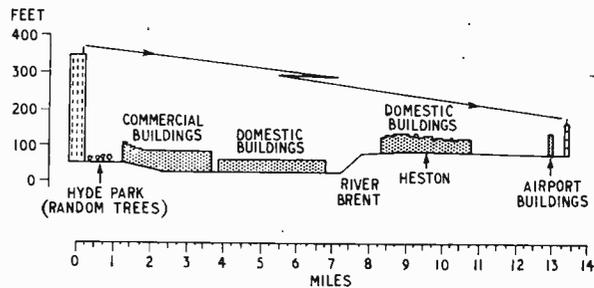


Fig. 2. Contour of an s.s.r. relay path 13½ miles long between London's Hilton Hotel and London Airport. The repeater gain was 130 dB and the relay was completely stable. London Airport was selected as a test site partly to investigate the possibility of instability occurring as a result of aircraft reflections. No instability due to this or any other cause was experienced.

stability to accept this higher power level. It is also clearly possible to scale up both the original transmitter power and the retransmission power in any desired ratio.

These are scope for a good deal of further work on the best forms of aerials to be used for various relay station applications but the aerials used in the field tests to date have been simple and conventional. Indeed aerial simplicity and ease of setting up have in themselves provided convincing evidence of the practicability of the s.s.r. system.

Not only does the system avoid the need for additional frequencies for relaying purposes but it also avoids the need for separate frequencies or telephone lines for linkage purposes. In applications where a substantial number of stations is required to cover a large area this is a very real practical advantage. In long route systems for trunk roads or railways the need for elaborate line or radio interconnection links can be avoided. In this case, since the relay operates at a high signal-to-noise ratio it is possible to envisage as many as 100 stations at 20-mile spacings in a 2,000-mile mobile system for trans-continental communication. In the first place, however, it is expected that the system will find its widest application in extended area coverage systems of all kinds.

Relaying on the same frequency has so many obvious advantages and so many potential applications that it is interesting to consider why its practicability should have gone unnoticed until now. The probable reasons may be listed as follows:—

1. Although a few attempts have been made in the past to perfect this kind of relay, such attempts have been made at v.h.f. as opposed to u.h.f. Equivalent aerials at v.h.f. are, of course, much larger and less manageable.
2. Solid-state techniques make a stable high-gain "same frequency" amplifier much more practical than was previously the case with valve amplifiers.
3. A mobile aerial sensitive to two polarizations is more practical at u.h.f. and probably has not been previously considered.
4. Only practical tests would confirm the high attenuation readily achieved between the relay transmitter aerial and its pick-up receiver aerial. Tests using all the features described have not previously been carried out so far as the writer is aware.

The equipment development and field trials of s.s.r. have been under the supervision of Mr. Brian Armstrong of Pye Telecommunications Ltd.

LETTERS TO THE EDITOR

The editor does not necessarily endorse the opinions expressed by his correspondents

Symbols: a rejoinder from I.E.C. and further comments

I SHOULD like to be allowed to comment on the Editorial in the January issue, as I believe that it may give rise to a misunderstanding with respect to the objects and function of the International Electrotechnical Commission.

In the first place, the decision of the C.C.I.R. to use the "hertz" as the unit of frequency follows from the I.E.C. recommendation, that, incidentally, dates back to 1935. The use of the term "hertz" has received consistent support from the International Conference on Weights and Measures indicating that this is not merely a question of the "Continental" imposing their will. The argument that the use of the "hertz" is undesirable because it does not indicate the property of frequency can also be applied to a number of other widely used units.

In the second place, I fear that the end of the article may tend to give the impression that I.E.C. Procedures are not adequate to ensure that its "formal decisions . . . on technical matters . . . represent as nearly as possible an international consensus of opinions on the subject dealt with." I think that anyone who has taken part in I.E.C. activities would agree that the I.E.C.'s Procedures do give the maximum guarantee that all opinions are duly made known and taken into account.

Incidentally, the zig-zag symbol for a resistance still appears in I.E.C. Publication 117, as a form internationally recognized. In judging the advisability or otherwise of showing the rectangular form on the "preferred" symbol, it is necessary to take into consideration the widespread use of the zig-zag to represent a winding. Not only does the I.E.C. Publication 117 attempt to reconcile differing national practices, but it also seeks to reconcile both "heavy" and "light" current drawing practices.

L. RUPPERT,
(General Secretary)

International Electrotechnical Commission,
Geneva, Switzerland.

WE would like to comment on your remarks in your January Editorial regarding symbols. As a company we are rather perturbed at what appears to be the sudden change in approach to these problems by the B.S.I. and, in particular, by the way in which new graphic symbols have been introduced into BS3939 with very little consultation. This could be the result of a too compliant attitude on the part of B.S.I. as you infer.

This company believes in following British Standards unless there are very strong reasons for not doing so. The situation which is emerging as a result of these recent changes may produce such a reason.

We fully support your view on the new "objective symbol" for resistors. The selection of this symbol is the more surprising in view of the fact that the rectangular outline is far from being generally used even on the Continent. It is difficult to see, therefore, the reasons for over-riding the sound principles that you enunciate.

It is not only in conventional electronics that the situ-

ation appears unsatisfactory. Even greater difficulties are likely to arise if some of the proposals now under discussion for logic diagrams are accepted. While the present B.S. proposals for logic diagrams leave much to be desired (and discussions are taking place to improve them) nevertheless the present series of logic symbols have the merit that they clearly indicate the function being performed. One of the new proposals of the I.E.C. now under discussion by B.S.I. is for the use of a uniform square or rectangular box with wording inside to indicate the function. We understand that the reason for this proposal is that diagrams can be drawn by computer using this method. This may be so, but it would appear that the advantage of the "means" is causing the protagonists of this arrangement to overlook the shortcomings (perhaps even the unusability) of the "ends". (Samples of the new arrangements circulated by the I.E.C. for consideration were in fact illegible.)

We regard the wish of the B.S.I. to follow I.E.C. Standards as most commendable, but it is questionable whether this should be at the expense of adequacy. Perhaps the answer is for British industry, through B.S.I., to play a more formative part in I.E.C. Standards.

A. J. WHEELDON,
(Manager Technical Information Dept.)

Marconi Company,
Chelmsford, Essex.

THE Editorial in the January issue was, to say the least, timely. It has served a double purpose, viz., to present a problem (which has been intensively discussed by the profession for some months past) not only in clear perspective, but also in terms of its background and implications. Thus the problem—the acceptance of the proposed I.E.C. changes—is exemplified by the c/s versus Hz issue, at first sight almost irrelevant, but, on closer examination, underlining the advantages of symbols possessing inherent meaning.

Both professional engineers and students are greatly concerned to acquire new information with the maximum accuracy and (usually) the maximum speed. This means that intelligence should be taken from the printed page without "interpretative discontinuity," however momentary. Such discontinuities increase the possibility of misunderstanding.

On the c/s and Hz question, it does seem a pity to abandon a piece of nomenclature which instantly defines the specific parameter physically and without ambiguity. Furthermore, the c/s is the only electrical unit which is established in terms of "natural" quantities, as distinct from the arbitrary basis of the remainder; so that one feels that it could well be distinguished from them by its "meaningful" name, as opposed to the surnames carried by the man-made units.

The main point of contention which has appeared is, however, the proposed changes in circuit diagram symbols, and in the resistor in particular. Apart from the fact that the rectangle lacks the pictorial communication power of the zig-zag, it also must be condemned

in this context because of its association with another sphere. The rectangle is (and presumably it is intended that it should remain) the stuff from which block diagrams are made. Block diagrams have a major function to fulfil, especially for much logic diagram work; let them be restricted to this duty, and do not introduce even an element of uncertainty or confusion by what amounts to ambiguous use if they are employed in two entirely separate kinds of diagram.

It may well be that draughtsmen find the rectangle much easier to draw than the zig-zag (assuming that they carry out their task the hard—traditional—way). However important this is in terms of time and money, it must be weighed against all that is achieved by clarity of expression. Perhaps it is not inappropriate to regard this as one facet of a principle laid down by a former Editor (Mr. F. L. Devereux) who had no doubts as to the duty of a writer to his readers. His basic quotation, from Moore's "Life of Sheridan," was that "easy writing's curst hard reading."

It is in connection with this over-riding requirement for clarity in pictorial communication that a final tribute must be paid, and a lost-cause period recalled, to *W.W.* The former is a matter of history, going back to the 1930s, when the British radio circuit diagram was a model of clarity as compared with its American counterpart. This could be largely attributed to the British method of showing the thermionic valve as an entity within an envelope, whereas the American symbol consisted solely of the electrodes without enclosure.

It must be stressed that clarity is not entirely a matter of the way in which a key symbol is shown. Relative layout can often make all the difference, and it is in this area that the writer has felt that the *Wireless World* has been consistently in the lead. The period of the lost-cause therefore developed when *W.W.* adopted "that" transistor symbol.

"PATENTEE"

Gyrators: their use in tuning and other circuits

IT would appear that Mr. Butler's gyrator can be used to solve the problem of getting a 10:1 frequency range using an ordinary tuning capacitor. Since the gyrator simulation of a tuned circuit turns one capacitance into an inductance while leaving the other as a capacitance, the use of a two-gang tuning capacitor with one section at the input and one at the output will produce the equivalent of simultaneously variable L and C . Since the frequency of tuning is proportional to $1/C$ instead of $1/\sqrt{C}$ as in an ordinary tuned circuit, a 10:1 frequency range will be obtained if the ratio of maximum to minimum capacitance is also 10. Range switching could be accomplished in theory by changing the gyration resistance, though I cannot see how to do this in practice without upsetting the d.c. circuit conditions.

If the gyrator were perfect, then the Q of the simulated inductance would presumably be very high. It would be interesting to know what can be achieved in practice with a simple gyrator. Even if the Q were not high, all would not be lost. If the dynamic resistance of the simulated tuned circuit were constant over the tuning range Q could easily be improved by positive feedback.

Another useful trick would be to gyrate a distributed constant RC transmission line (which can be made from a high stability resistor and a bit of silver paper) into a distributed-constant RL transmission line (which for practical purposes cannot be made at all). Since one of these has a phase angle of impedance of $+45^\circ$ at all fre-

quencies and the other a phase angle of -45° at all frequencies, it should be possible to obtain a frequency-independent differential phase shift of 90° . This would have uses in single-sideband generation, phase-sensitive detection, etc.

Incidentally, the individual amplifier circuits of the "simple gyrator" look as if they would be useful as tape recording amplifiers, along the lines of those described in *Wireless World* for August 1965, p. 403, and March 1966, p. 144. Now that planar transistors can be had for less than the cost of electrolytic capacitors, the addition of a couple of transistors to the original circuits is no great penalty. Another possible application of these high-output-impedance amplifiers is to drive a rectifier meter and so provide a wide-frequency-range voltmeter of good linearity.

Not that we are alone in such matters: I have German equipment in which charge is marked in As. Perhaps in the interest of international language the Germans will recognise M. Coulomb if we pay homage to Herr Hertz. In the same vein, do I understand that we are about to adopt the tesla for the cumbersome weber per square metre? The sooner obsolete c.g.s. magnetic units are replaced by appropriately named m.k.s. units, the better for those we teach.

J. M. OSBORNE

Westminster School,
S.W.1.

I BELIEVE the hertz will eventually oust the cycle per second, also that its ally the tesla will supplant the weber per square metre, but not until its proponents have fought a vigorous beach-head action. It is true that the older terms are more suggestive of the definitions of the quantities involved, but we have already learnt to use the ampere instead of the coulomb per second; the watt is more familiar than the joule per second, and so on. The new units remove two more of the cumbersome "something per something" type of term, but we still have the metre per second. Possibly this is because the concept of velocity has been with us for so long that it is difficult to find any one worker to whom the honour of having a unit named after him could be assigned. Meanwhile, what of the ampere-turn per metre (magnetic field strength), the volt per metre (electric field strength) and the coulomb per square metre (electric flux density)?

R. BAYFIELD

Hove, Sussex.

quencies and the other a phase angle of -45° at all frequencies, it should be possible to obtain a frequency-independent differential phase shift of 90° . This would have uses in single-sideband generation, phase-sensitive detection, etc.


Incidentally, the individual amplifier circuits of the "simple gyrator" look as if they would be useful as tape recording amplifiers, along the lines of those described in *Wireless World* for August 1965, p. 403, and March 1966, p. 144. Now that planar transistors can be had for less than the cost of electrolytic capacitors, the addition of a couple of transistors to the original circuits is no great penalty. Another possible application of these high-output-impedance amplifiers is to drive a rectifier meter and so provide a wide-frequency-range voltmeter of good linearity.

G. W. SHORT

Croydon, Surrey.

The author replies:

MR. SHORT'S first suggestion is perfectly feasible, at least in principle. With a 2-gang capacitor, 500pF maximum per section, and assuming a gyration resistance of 1,667 ohms, the frequency range would be 200-2,000 kc/s. At frequencies in the middle of the audio range, gyrators may be used to stimulate inductors with Q -factors around 500 or so, but the performance deteriorates even at low radio frequencies. Nevertheless, rough checks with a

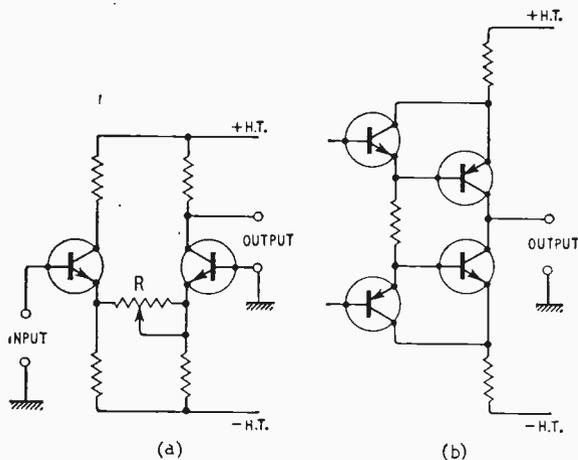

gyrator built with commonplace h.f. transistors show that operation up to 300 kc/s is possible with Q -factors of about 40. These figures are suspect because it is thought that some regeneration must have been present to account for the relatively high Q .

Checks made at lower frequencies with decade capacitor boxes are strictly in accord with theory. It is more than likely that phase shifts round the gyrator loop could cause some instability, and a little design effort might be required to reduce this effect.

The second suggestion, to gyrate a distributed-constant RC transmission line into its RL counterpart is an extremely interesting one, well worth testing. Although conventional wide-band 90° phase-shift networks can be made to give a good performance, the best types are lossy, complex, and require close-tolerance components of awkward values.

As regards the use of the individual amplifiers of a gyrator for other purposes, there are many such applications. Mr. Short's two suggestions are excellent examples. I have used these amplifiers as rectifier meter drivers of extreme linearity, wide-band phase-splitters (an inverting amplifier in one channel, non-inverting in the other), constant-current sources for integrators and time-base generators, as substitutes for the conventional cascode circuit, as the maintenance amplifier of current-fed Wien bridge oscillators, as RC tuned amplifiers and as drivers for complementary push-pull output stages, where they reduce cross-over distortion under zero bias conditions.

As regards methods for controlling or varying the gyration resistance, this is admittedly a problem when d.c. coupling is used. The circuit, Fig. (a), shows one way of varying the resistance without upsetting the d.c. conditions. Essentially we have a differential amplifier pair with separate emitter load resistors and with a variable resistor coupling the upper ends. When R is zero the transistors form a long-tailed pair; as R is increased towards infinity, the gain progressively falls to zero, causing the gyration resistance to rise to some high value. If a.c. coupling is admissible in the gyrator, gain control is much simplified and almost any of the standard methods may be used. Such a scheme would be perfectly satisfactory for the purposes envisaged by Mr. Short. Feedback is more easily applied to increase the amplifier output impedance and, to raise the input impedance, field-effect transistors could be used, whereas, due to the peculiar biasing requirements, some ingenuity is required to incorporate them in d.c. amplifiers.

Since my article was written, E. W. Shallow and P. J.

Baxandall have described a new constant-current circuit.* This, with minor modifications, seems to be suitable for use as the output stage of a high-grade gyrator. A suggested arrangement is shown in Fig. (b). It would be worth trying this with the input and driver stages of my original Fig. 5.

F. BUTLER

Cheltenham,
Glos.

* See, Letters to the Editor, *Wireless World*, December 1966, p. 609.

MR. BUTLER gave a very clear explanation of the operation of gyrators in the February issue, and his circuits look most useful. Perhaps some enterprising integrated circuit manufacturer will offer cheap and compact versions of them before too long.

In the meantime, however, useful results can be obtained with very much simpler circuits. Possibly the simplest of all is shown in Fig. 1. In this case the transistor acts as the phase inverting amplifier and the resistor, R , as the non-inverting "amplifier." If a capacitor is connected between the base and emitter the collector-emitter terminals will have the characteristics of an inductor. The reverse is also true of course.

We actually use a version of this circuit in the Sinclair PZ-3 power supply shown in Fig. 2. In this case the components in the dotted box replace, and are directly equivalent to, the choke which might be used in this position in a conventional circuit. $Tr1$ and $Tr2$ form a Darlington pair and $Tr1$ has to be a small power type. The voltage dropped across the simulated inductor is small and the ripple on the output of the power supply is only 50 mV for a drain of 1 A. As the current in the transistor circuit can vary so can the equivalent inductance, thus the circuit resembles a swinging choke with an inductance given by the formula $L = CRr_e$, where C is the base-emitter capacitor, R is the collector-base resistor and r_e is the intrinsic emitter resistance of the compound transistor. This last term is a function of current and the equation gives an inductance value of about 1 H at 100 mA. The circuit is very much smaller than its passive equivalent and is also less expensive.

The very simple circuit of Fig. 1 can also be used in filters and tuned circuits and it should be particularly useful where large values of inductance are required in a small space.

C. M. SINCLAIR

Sinclair Radionics Ltd.
Cambridge.





Fig. 1. Simple gyrator circuit

Fig. 2. (Below) PZ-3 power supply using gyrator circuit

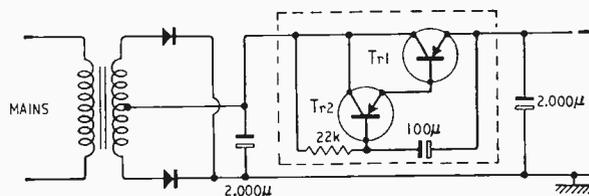

"Letters" Continued on Page 141

WIRELESS WORLD, MARCH 1967

The Future of Electronics

WHILE I share "Vector's" disappointment with the report of the Electronics E.D.C. (*Wireless World*, January 1967, p. 54) I was perhaps less hopeful than he was. It should first be pointed out, however, that his picture is a little too black since there is an area in which the British electronics industry has strength (in the sense of being at least as far ahead of the rest of the world as it is behind U.S.A.), namely, in capital goods such as computers and marine radar. Consumer goods and components are the less vigorous areas.

My lack of expectation of any startling pronouncement was based on the knowledge that the E.D.C. was not a group of supermen, but of representatives of the industry as it is plus some economists. On a rough classification of the membership listed in the Report, the E.D.C. consisted of eight managers, five trade-union representatives, three Government economists, three representatives of ministries capable of subsidizing the industry and one independent economist who is distinguished for his work on economic forecasting. Since much of British industry is unfortunately an arena for the fight between management and unions, the presence of these two groups may inhibit the frank and impartial discussion of the facts. Then if there are problems, who is to solve them? If a company had a solution to a major problem, it would not want its representative on the E.D.C. to pass on the advantage to everyone else; but the more probable situation is that no company has found a solution and therefore the E.D.C. has not one. This, of course, leaves out of account the Ministry of Technology and the Aviation section of the Board of Trade and the N.R.D.C.; do these ministries contain enough supermen to solve the problems which commercial managements have failed to solve?

Neither does it surprise me that the E.D.C. said no more than *Wireless World* said eighteen months earlier. I doubt whether any member of the E.D.C. would personally have given so much attention to microelectronics as technical journalists will have done; and the E.D.C. would have neither the time nor the resources to carry out a more detailed investigation.

What, then, is the use of an E.D.C.? I am inclined to think it is worth while forcing all parties concerned (management, unions and government departments) to face the problems, and that some mutual sharpening of wits may result. But the "crow-bar effect" is a very real danger and the crowning success of any private enterprise would be to give a lead where the E.D.C. fails to do so.

"AMATEUR ECONOMIST"

Television Receiver Sound Quality

I WAS interested to read Mr. Butler's letter in the February issue regarding television receiver sound quality.

Although not living on licence payers' money myself I feel I must point out that no other organization has done more to support good engineering standards than the B.B.C. despite a domestic receiver industry which in the main seems disinterested in matching those standards. In fact at the present time the domestic receiver industry and the audio engineering industry seem to be entirely separate spheres of activity. It was not always so; the 1936 "Radiolympia" used as its main selling feature the quality of reproduction of its receivers. I am interested to learn that the manufacturers do make receivers with

"a considerably wider acoustic frequency response," but I must say these are not very evident in the dealers' shops or in advertisements.

Of course, a superior device will cost more. A car with heater, windscreen washers, tuned-up engine will cost more than the basic model, but many people are prepared to pay the extra. A demand for any product has to be created by explaining to the public the advantages that the extra outlay will bring. I cannot recall any television receiver being launched in a National advertising campaign which claimed as one of its main features a superior quality of sound reproduction.

In conclusion, I must admit that on reflection I may live partly on licence payers' money as my employers are one of the major equipment suppliers to the B.B.C.

D. A. PAYNTER

Billericay,
Essex.

Listening Through Headphones

MR. CAWKELL'S remarks (*W.W.*, April 1966) draw attention, once again, to the difference of subjective experience resulting from wearing headphones rather than listening to sounds produced by a loudspeaker. The special effects that he mentions, produced by modifying the presentation of the sounds objectively, must necessarily be related to certain subjective reactions that I reported some years ago (Ref. 1).

In my investigation—albeit in a different world of subjective experience, namely the reaction of my subjects to the distortion of pure tones—a dramatic reduction was reported in the subjective "rating" of distorted sounds when they were observed through high-grade headphones as compared with the rating reported on the same distortion reproduced by high-grade loudspeakers. That the difference in reaction was in some way related to the delays in *arrival-time* of the harmonic terms of the distorted sounds as compared with the fundamental term, was demonstrated unequivocally by tests made (Ref. 2) in which the fundamental term was successively delayed with reference to the harmonics, or *vice versa*.

In the investigation cited this finding seemed to fit in very well with the other facts deduced about the peculiar way in which distortion was subjectively judged.

I do not suggest that Mr. Cawkell's work was influenced by distortion unwittingly introduced into the sounds listened to, but rather that room reverberation could well be a factor that could alter the subjective response to the sounds produced by loudspeakers. To check whether this is so tests should be repeated in an anechoic room or the open air. Has this been done?

This may well be a suitable occasion to point out that the effects reported in Ref. 1, which to me were quite astonishing, have apparently had no influence whatever upon acousticians in general for so far no one has either supported or rebutted them.

E. RAMSAY WIGAN

Portsmouth, Hants.

1. *Electronic Technology*, April & May 1961.

2. Final appendix to the above.

Voltage-controlled Ignition Unit

YOUR readers may be interested in the following small modification to the electric ignition system of a gas cooker. The system fitted to the oven and high level

grill of the cooker worked from a 1.5V low capacity battery. Due to cell voltage drop on load and across exposed switch contacts, the original system required frequent battery changes and switch clearing.


The system described has a 4.5V battery as energy source and a 1.5V battery as voltage reference.

The circuit is a typical series transistor voltage regulator. Tr3 is the series regulating transistor and its Darlington connection with Tr2 is used to reduce the base drive requirements. The base drive for the series regulating element is set by the collector current drawn by Tr1. The collector current of Tr1 is determined by its base potential with respect to its emitter voltage of -1.5V. The two diodes D1 and D2 prevent both elements being energized by the closing of one switch. Due to voltage drop across the blocking diode and the emitter base diode of Tr1 the output voltage is approximately 0.4V greater than the potential of the reference cell. Resistor R2 is adjusted on test to give 1.4V across the ignition element, and will have a value between 0.2 and 1 ohm. The series regulating action maintains 1.9V across the igniter and R2 for battery voltage drop or switch voltage drop of approximately 2.0 volts.

The series transistor emitter current is between 0.5 and 1 A and the emitter current of Tr2 is approximately 20 mA. Under normal operating conditions the collector current of Tr1 is 5 mA, but rises to approximately 100 mA if the switch is closed on to an open circuit (due to a displaced or burnt out element). This is caused by Tr1 being bottomed and no base current being required by the super alpha pair. The battery drain with neither switch closed is 2 μ A for the 4.5V battery and 0.25 μ A for the 1.5V reference battery at a temperature of 16°C.

J. S. TAYLOR

Dumfries, Scotland.

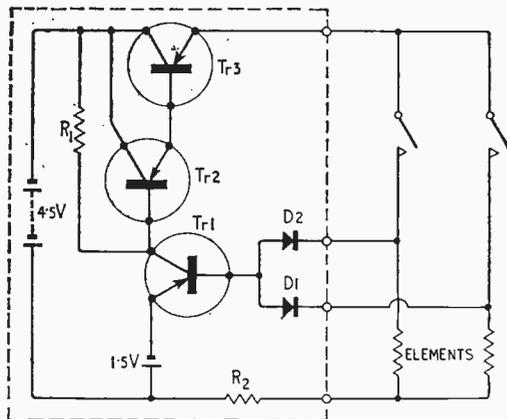


Voltage-controlled ignition unit power supply described by Mr. Taylor with (below) the components used.

Component used	Min. ratings for alternative types
Tr1	OC 72 I _c 100mA; V _{CE} 6V; P _{TOT} 100mW
Tr2	OC 72 I _c 30mA; V _{CE} 6V; P _{TOT} 20mW
Tr3	OC 35 I _c 1A; V _{CE} 6V; P _{TOT} 2W
R1	33 Ω 1W 0.4W
D1 & D2	OA 81 I _F 10mA; p.i.v. 10V
R2	Short length of resistance wire. Rating approx. 1W.

Tape Track Selector Switch

THE circuit shown is intended to act as a track selector switch for tape-head signals from a two-channel magnetic recorder. It is suggested that it could be used, for instance, with Dr. Bailey's recent stereo amplifier circuit. It is necessary in the case of tape playback systems to provide a mono-stereo switch, mono being selected from

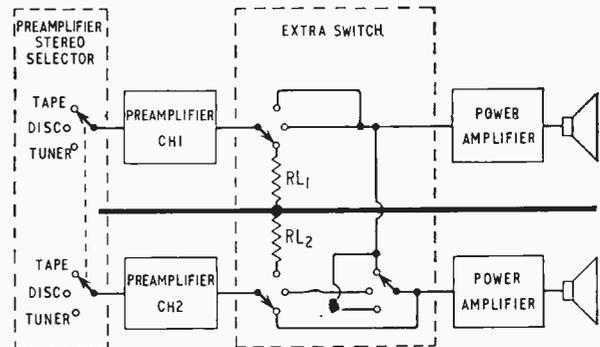

any available track of four tracks and the upper track of a two-track head. The normal stereo-mono shorting switch is unsuitable as the two unrelated tracks would be mixed together. Tape head equalization and amplification sometimes has its problems with transistor noise. It is for this reason the switching circuit is placed after the pre-amplifier and not before (switching very low voltage signals could be a very noisy business indeed). There is another advantage in this positioning of the circuit—the redundant pre-amplifier may be used for other purposes. Programmed slide-projector cues, recorded on the unused track, could be amplified by this pre-amplifier and directed via an extra output socket to an automatic slide projector. A further possibility, in view of the fact that the majority of radio broadcasts are at present mono, is that the switch would be useful for those who wish to operate another mono input, for example, from an a.m. tuner. The only other foreseeable problem is that of cross talk. To combat this it is suggested that care should be taken in constructing both the switching circuit and the pre-amplifier circuit.

A. D. HODGE

London, S.W.1.

The author replies:

I WAS very interested in Mr. Hodge's letter as I have been confronted with the same problem just recently. My answer was to use shorting switches across the two head channels so that either or both could be selected. I can see, however, that for some purposes there are definite advantages to be gained in having a spare pre-amplifier. In addition the duplication of mono input channels could be very useful. The only drawback that I can see is that it is an additional control for the front panel and it might cause confusion in unskilled hands. This might be too pessimistic a view, however; a lot depends upon the correct and simple labelling of controls.

In short, therefore, I feel that if tape is the only problem, then a channel selector switch on the deck itself is the simplest solution. If additional inputs or systems such as automatic slide changing are envisaged, then the system outlined would definitely be the best way of doing it.

ARTHUR R. BAILEY

Bradford.

Battery Eliminator for Transistor Receivers

CIRCUIT USING AUTOMATIC BATTERY-MAINS SWITCHING

By R. F. COOK

THE essential requisites for a mains driven power unit to operate transistor equipment are reliability (particularly in the sense that the voltage applied to a radio receiver for example should never be too high nor of reverse polarity), ease of use (i.e. ease of changing from mains to battery operation and vice-versa), low cost and require no modifications to the equipment it will supply.

Circuit.—The unit consists of a (rough) d.c. power supply derived from the a.c. mains in any conventional way and a regulator which uses this supply to produce a constant voltage for the receiver. The voltage reference for the regulator is the receiver battery, while the regulator (consisting only of a transistor, a capacitor and an optional resistor) is contained within the set. The regulator transistor (in Fig. 1) when active, functions in the common collector mode, i.e. as an emitter follower. The voltage applied to the receiver is that of the battery less the base-emitter voltage drop (about 0.2 V). The current drawn from the battery is only about $1/\beta$ of the current required by the receiver (where β is the current gain of the transistor), typically 1 or 2%, the bulk of the current coming from the rough supply. When the supply is disconnected, or switched off, the receiver operates by drawing its full current from the battery through the base-emitter diode. The presence of the diode causes an increased supply impedance, which is offset by the capacitor Q, and a slightly reduced voltage. This capacitor is also useful in reducing the surge current that occurs when the receiver is switched on, since it remains charged almost to the full battery voltage all the time.

The collector resistor R limits the transistor dissipation at high load current, by reducing the applied collector voltage. It also serves to define the upper limit of the load current (when the transistor bottoms) and to increase adaptability to various rough supply voltages. It could be omitted altogether if the supply is low and constant

enough, but its presence is necessary if the supply should fail catastrophically to the extent that reverse voltage is applied to the regulator. In this situation the transistor acts as two diodes in the forward bias condition with a common electrode (the base), supplied from the battery. The transistor will function like this, without receiver damage, while the battery can maintain the current back into the supply or the base-emitter junction of the transistor remains good against the resultant reverse voltage when the battery becomes exhausted.

Construction.—In practice it is not necessary to tamper with the set in any way since there is often an aperture or grid at the back of the receiver through which the supply wires can be passed. It is possible to mount the two or three regulator components on the back of the polarised connecting plugs from an old battery, with short leads to similar plugs which will plug into the battery. The leads from the receiver then connect to the plugs carrying the regulator components. The two leads carrying the external supply can be permanently connected to the regulator (see Fig. 1). Similar plugs could be used to disconnect the supply when the receiver is used as a portable, but the author preferred to use a four-way connector and used the spare two pins to provide a shorting link which controlled the application of a.c. to the power supply. The supply unit consisted of a bell transformer with a bridge rectifier and 250 μ F reservoir capacitor. This gave about 18 V open circuit.

In the following analysis the author's values are shown.

V	open circuit voltage of power supply	..	18 V
v	battery voltage	..	8.5 V
I	maximum current required	..	25 mA
C	reservoir capacitor	..	250 μ F
n	rectification factor,	1 for full wave, or bridge	
		2 for half wave	

The required collector resistance is given by:—

$$R = (V - v) / I - 10n C \text{ kilohms, or approx. } 0.34 \text{ (340 } \Omega \text{)}$$

I can be measured using a sensitive voltmeter across a 10 Ω resistor inserted in series with the transistor equipment, at maximum volume. The maximum dissipation required of the transistor is then given approximately by:—

$$P = (V - v)^2 / 4(R + 5n_1 C) \text{ milliwatts} \quad \dots \quad 65 \text{ mW}$$

The transistor can be chosen knowing the following maximum requirements:—

Collector-base voltage	9.5 V
Collector current	25 mA
Base-emitter current	25 mA
Power dissipation	65 mW
Reverse base-emitter voltage, $v + 2$ say, for fault conditions	10.5 V

The value of R is fairly critical; if it is too large there will be a sudden onset of mains hum at high volume level, and if it is too small the power dissipated in the transistor will be unnecessarily high at medium to high volume.

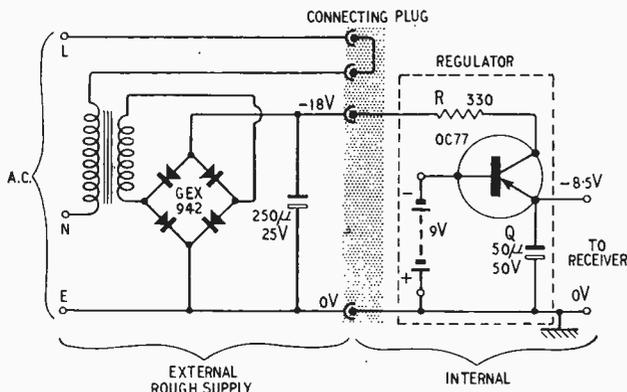


Fig. 1. Battery eliminator and voltage regulator circuit for transistor receivers.


NEW PRODUCTS

equipment systems components

Improved Crystal Pickup

THE Walton M1 crystal pickup cartridge has been designed to provide a competitively priced mono pickup that will track stereo records satisfactorily, without damaging them, and at the same time give an output high enough for the average radiogram. It uses a "decoupled stylus tip" technique* which gives the high compliance in all directions required by stereo records (actually, lateral compliance 4×10^{-6} cm/dyne, vertical compliance 2.5×10^{-6} cm/dyne) and also the low stylus mass needed to reduce distortion in the high frequency region (total effective stylus mass 1.5 mgm). Tracking weight is 3 to 5 gm—the greater weight being needed for loud records—and the output is 1.25 volts/5cm/sec. Frequency response is 30 c/s to 14 kc/s, ± 3 dB. A load impedance of $1M\Omega$ or over is required. The cartridge has the usual turn-over arrangement for l.p. and 78 r.p.m. records and uses sapphire styli, but

* British Patents 979856/60.

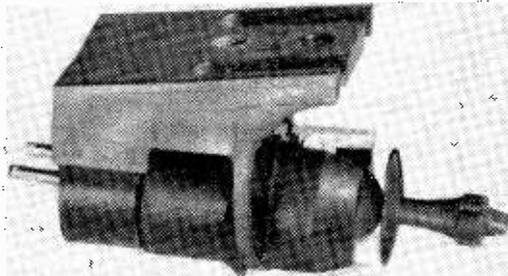

diamond styli will become available later.

When tried in a medium-quality record player the pickup gave agreeable and clean reproduction from both mono and stereo records, and on some loud and complex orchestral passages was noticeably better than the well-known cartridge supplied with the player. Retail price is £1 15s 4d. The makers, Rainer-Walton Enterprises Ltd., 19 New End, Hampstead, London, N.W.3, say that a stereo model will be available later.

WW 301 for further details

P-N-P Silicon Devices

MULLARD announce the addition of seven p-n-p types to their range of silicon planar transistors. Five have power ratings of 600 mW and two have power ratings of 350 mW. Because of their linear gain/current characteristics all the new types are suitable for both switching and linear applications. Their p-n-p characteristic permits complementary operation in conjunction with Mullard n-p-n types. The two 350 mW devices are BCY70 and BCY72. The former has a high V_{CE0} of 40 V and a low saturation voltage. It is primarily intended for medium-speed switching applications. General purpose transistor BCY72 is suitable for use in switching and amplifying applications with less stringent requirements. Both types are in TO-18 encapsulation with the col-

lector connected to the can. A low leakage current, low saturation voltage and a high cut-off frequency generally in excess of 200 Mc/s are features of the new 600-mW transistors (which meet JEDEC specifications). Four of the JEDEC types also have a high emitter/base breakdown voltage of 5 V. Applications for the 600 mW group of devices are similar to those recommended for the lower rated devices although the high power rating also makes them suitable for use in driver and output stages. All devices in this group are in TO-5 encapsulation with the collector connected to the can. Mullard Ltd., Mullard House, Torrington Place, London, W.C.1.

WW 302 for further details

Tunnel Diode


LOW cost tunnel diodes in the TD700 line are produced through a combination of planar and thin film fabrication techniques. Priced at less than 10 shillings in quantities, they are available from the General Electric Company, U.S.A. The TD700, and the TD700H (high temperature germanium tunnel diodes) are available with peak currents of 0.5, 1.0, 2.2, 4.7, and 10 mA. International General Electric Company of New York Ltd., Lincoln House, 296 High Holborn, London, W.C.1.

WW 303 for further details

PAL Pattern Generator

THE Philips television pattern generator PM 5507 is a service instrument for installation, repair and aligning of colour receivers. Although developed for the PAL system, it can also be used for the N.T.S.C. system. The generator provides a PAL signal on 625 lines, 50 c/s field frequency, over a tunable range of 480 to 850 Mc/s vision carrier (continuously adjustable with vernier drive), and it will supply black/white convergence as well as colour patterns. The video signals available for the test pattern are (a) 12 horizontal lines, (b) 12 vertical lines, (c) cross hatch made by (a) and (b), (d) dots, (e) colour bar, (f) rainbow patterns. In positions (e) and (f) the colour signal (luminance and chrominance) can be externally adjusted from zero to maximum, and in the maximum position, $Y=50\%$ and chroma = 35% of total video amplitude. The colour synchronizing burst (subcarrier frequency) has a width of 12 cycles, and it starts 5.3 μ s after the line sync pulse leading edge. The subcarrier frequency is 4.43361875 Mc/s. The keying frequency is 187.5 kc/s which is equal to 12 times the line frequency. The instrument operates from 110/220 V 50 c/s mains and the size is 9 in \times 7 in \times 8 in. The price is £227 10s. M.E.L. Equipment Co. Ltd., Manor Royal, Crawley, Sussex.

WW 304 for further details

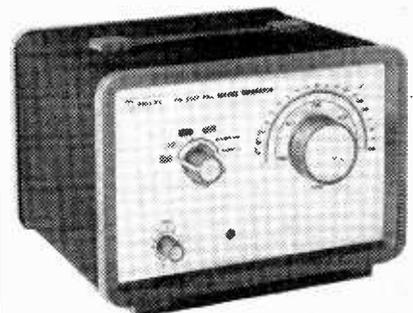

WIRELESS WORLD, MARCH 1967


F.E.Ts

SILICON diffused n-channel field effect transistors encapsulated in TO-18 packages produced in two ranges SI.211N and SI.221NA series are available from Jermyn Industries, Sevenoaks, Kent. The SI.211N single gate devices and the SI.221NA double gate devices combine high transconductance (spreading from 200 to 7,000) with high input impedance and low pinch off voltages. The SI.221NA series are low-noise devices subdivided into three noise groups—A, B and C (the B version has a noise figure of 1 to 2 dB with a source resistance of 1 M Ω). The series SI.221NA have maximum quoted gate leakage currents of 2nA and the SI.211N series 10nA. This Akers Electronics, Norway, range is also available in matched pairs or encapsulated pairs in a 6-lead TO-18 package with transconductance ratio greater than 0.9.

WW 305 for further details

System Analyser

PLOTTING a system's phase and amplitude response at various frequencies is possible with the single instrument known as the 1995 Servomatic analyser, manufactured by the Servo Corporation of America. The instrument is a combination of multiple function generator, calibrated phase shifter, and precision amplitude control. Sine, square, and triangular waveforms are all available. A reference signal is provided, which is phase synchronized with respect to the output signal. Internal modulation provides a "bow tie" image on an oscilloscope for zero phase shift indication, and system phase shift can be measured from this form of display by the Lissajous method. The frequency range is 0.005 c/s to 1 kc/s, continuously variable over five ranges for all waveforms. Frequency calibration accuracy is $\pm 2\%$ max. of dial setting. There is an 0 to 360° direct reading phase dial

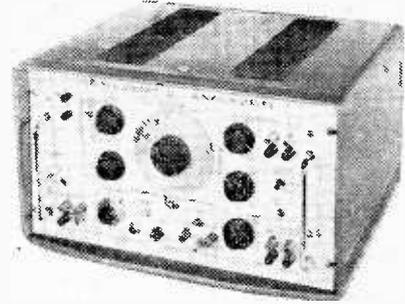

with 0° and 90° reference points. Carrier acceptance is 50 c/s to 10 kc/s (external). The applications for which this analyser is intended include: transfer function of open and closed loops, phase angle measurements, amplitude measurements, transfer function of damping and filter networks, frequency response of parts of systems, response of servo amplifiers, servomotor time constants, and response of magnetic amplifiers. Microwave Systems Ltd., 32 Hunting Gate, Hitchin, Herts.

WW 308 for further details

Strain Gauge Bridge

THE portable strain gauge bridge Type 5580 has been designed for the "on site" measurement of strain and stress in all types of structures and machines, using Tinsley resistance strain gauges in the range 50 Ω to 2 k Ω . This solid-state instrument weighs only 12 lb, and is suitable for single-gauge, 2-gauge and 4-gauge bridges. The bridge supply is obtained from a self-contained 1 kc/s square-wave oscillator operating at approximately 3 V. The output from the bridge is amplified in a 3-stage amplifier, and a manual balance obtained on a centre zero pointer type detector. Supplies for the oscillator and amplifier are obtained from an internal battery which can be charged in situ when not

in use. Two ranges are provided: $\times 1$ measuring $\pm 10,000$ units of microstrain in steps of 10 units and $\times 0.1$ measuring $\pm 1,000$ units of microstrain in steps of 1 unit. The gauge factor dial covers from 1.8 to 4.5 in steps of 0.01. The limit of error of the bridge is $\pm 0.5\%$ of reading or 5 units whichever is the greater. Where it is necessary to obtain measurements from a number of gauge positions, a balancing unit and selector switch Type 5580B must be used. This unit contains a 10-way switch and 10 apex units for balancing the individual circuits. H. Tinsley & Co. Ltd., Wern-dee Hall, South Norwood, London, S.E.25.

WW 306 for further details

Electronic Timer

THE circuit of the ET timer is based on trigger tubes, one of which drives a relay having a single pole changeover output contact which is rated at 4 A, 415 V a.c. Normal operation is from a supply of 200 to 240 V 50 c/s, and includes voltage stabilization. Repetition accuracy of a timing cycle is $\pm 2\%$ for an input variation of $\pm 10\%$. Power consumption of the unit is 3 VA, and it will operate satisfactorily over a temperature range of -20°C to $+50^\circ\text{C}$. Timing of both pause and impulse periods is set by two independent control knobs and associated scales, and

each scale may be selected from one of five ranges which cover from 0.1 second to 120 seconds. Remote potentiometers, scales, and knobs can be supplied separately where the mounting position of the ET makes this feature necessary. The timer is intended for any system, mechanism, or process where separate control of "on" and "off" conditions are essential. Manufactured by SBIK of West Germany and marketed by Elremco Sales Ltd., P.O. Box 10, The Fairway, Bush Fair, Harlow, Essex.

WW 307 for further details

Digital Clock

INTENDED for general time keeping applications on the 12 or 24 hour system, the Six-Seventy digital electronic clock in the Digicron range has an in-line neon tube display. The hours and minutes digits are 30 mm high, and the seconds digits are 15 mm high, and it is stated that these characters can be read at over 40 ft away, even under high ambient light levels. The time source is normally derived from the 50 c/s mains supply, although a crystal time source can be fitted at extra cost. A single control is used to set the time, and one switch sets the clock for either the 12 or 24 hour system. Should the mains supply be interrupted, the clock will only start when it has been correctly reset. A 60 c/s version is also available. The front panel is coloured light buff to BS.2660. Case colours available are mid-grey, dark green, mid-blue, mushroom. Darang Electronics Ltd., Restmor Way, Hackbridge Road, Hackbridge, Surrey.

WW 309 for further details

Transistorized Multimeter.—We erroneously attributed a recorder output to the multimeter type 130S by Comark described in the January 1967 issue, p. 49). This is a feature of a d.c. millivoltmeter (type 120S) by the same manufacturer.

Digital Voltmeter

COST considerations are said to have influenced the design of the Type 500 integrating digital voltmeter by Weir Electronics Ltd. This instrument employs ring counter circuitry with n-p-n, p-n-p transistor pairs for switching the neon tubes, rather than the conventional binary counter with matrix decoder. It measures 1 mV to 1 kV d.c. in four ranges with a sensitivity ranging from 1 mV to 1 V, and it has an accuracy of $\pm 0.1\%$ of full scale reading. The input impedance is greater



than $1\text{ M}\Omega$ on the 1 V range. The internal calibration voltage is derived from a low temperature coefficient zener diode having a stability of $\pm 0.001\%$ per year at normal temperatures, the operating temperature range being $+10^\circ\text{C}$ to 35°C . Common mode rejection is 30 dB at d.c., 50 c/s, and 100 c/s. The input overload limit is 1,000 V d.c., which will not damage the instrument irrespective of the range in use. Polarity may be reversed by a push button switch which also operates the positive terminal neon indicator lamp. The instrument has no chassis, and circuit boards are firmly held between the covers by alignment of tongued projections and p.v.c. foam compression strips. Interconnections between the seven circuit board modules are made by gold plated multiple connectors, thus eliminating the need for cable forms. Weir Electronics Ltd., Durban Road, Bognor Regis, Sussex.

WW 310 for further details

S.S.B. Transceiver

KW2000 CA (working range of over 1,000 miles) is a single sideband commercial transceiver with a frequency coverage of 3 to 19 Mc/s and a frequency stability of 1 part in 10^6 over the temperature range -10°C to $+70^\circ\text{C}$. Transmission and reception modes are A3J (single sideband, suppressed carrier), A3H (compatible amplitude modulation), and A1 (cw. telegraphy). Transmitter power in the s.s.b. mode is 180 W p.e.p. input; c.w. 75 W output; and a.m. 25 W output. The receiver output is 2 W max. with 8% overall distortion in 3 Ω . For "fixed" or mobile opera-

tion it can be powered by a mains supply of 105/125 V or 200/250 V at 45 to 65 c/s; alternatively, a 12 V d.c. transistor power pack will drive the set, with either negative or positive chassis. Weight of transmitter, receiver and power supply unit is 47.5 lb. Battery consumption on transmit is 20 A, and on receive it is 10 A. Also available are aerials for mobile and fixed operation, beams, and masts. K.W. Electronics Ltd., Vanguard Works, 1 Heath Street, Dartford, Kent.

WW 311 for further details

Voltage Impulse Meter/Flux Meter

A RANGE of small precision instruments by Siemens and Halske (Germany) distributed in Britain by R. H. Cole Electronics Ltd., 7-15 Lansdowne Road, Croydon, Surrey includes a voltage impulse meter. This meter can measure fields associated with permanent magnets, relays and electrical machines. It can also measure voltage and current pulses and may be used to plot complete hysteresis curves of ferro-magnetic materials for short period measurements (approximately 0.1 ms to several seconds). The meter characteristics include an almost torqueless movement with an extremely small moment of inertia (second moment of area), a rela-

tively low resistance in closed circuit provides strong electromagnetic damping thus permitting a short setting time compared with that of a ballistic galvanometer. The mirror scale is marked linearly into 75 divisions. The reading sensitivity is 1×10^{-4} Wb/div. The flux-meter's catalogue number is M805-A80, a matching search coil's number is M805-A 800. The dimensions and other specifications common to the range of instruments are $178 \times 138 \times 78$ mm and all have a 100 mm long mirror-scale, knife-edge pointer and screening as a protection against the effects of static electricity and interfering fields.

WW 312 for further details

INTEGRATED CIRCUITS


NEW elements in the Signetics (U.S.A.) range of integrated circuits are now available from the Microelectronics Division of ElectroSil Ltd., Colnbrook By-Pass, Slough, Bucks. These include the decade counter/storage register (S1280A) and binary counter/storage register (S1281A). They are multi-function monolithic sub-systems packages in the 14-lead dual in-line configuration, designed to provide both counting and storage functions. The S1280A will divide by 2, 5 or 10, depending on the connections by the user, and provides individual outputs for applications in counting, storage, register and memory. The S1281A provides the facility of dividing by 2, 4, 8 or 16. Both devices have counting rates of 20 Mc/s typical and operate over the range 0°C to 70°C .

WW 313 for further details


TELEMETRY RECEIVER

MODULAR telemetry equipment by Dynatel Ltd., Astronaut House, Hounslow Road, Feltham, Middlesex, now includes the DRT-2 telemetry receiver. The circuits are of solid-state design, and the i.f. and r.f. stages are plug-in units allowing rapid changes in range and operating mode. This receiver is capable of a.m. and f.m. operation. The frequency range is determined by r.f. plug-in units covering 25 Mc/s to 500 Mc/s. Sensitivity for both f.m. and a.m. operation is 5 μV input. The local oscillator stability is $\pm 0.0003\%$ for crystal with oven, and $\pm 0.001\%$ for crystal without oven. The i.f. filter bandwidths available are 500, 250, 200, 150, and 100 kc/s. Input impedance 50/75 Ω unbalanced. Spurious responses are better than 60 dB down, with spurious emissions of less than 5 milliwatts. A.M. distortion is less than 1% for 65% modulation, and a.m. frequency response is 100 c/s to 50 kc/s.

WW 314 for further details

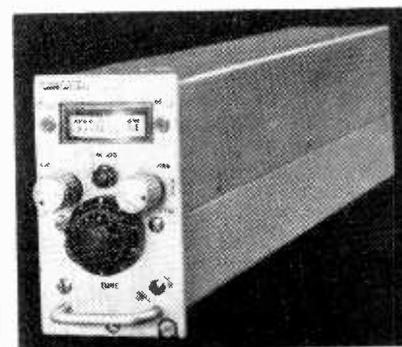

WIRELESS WORLD, MARCH 1967

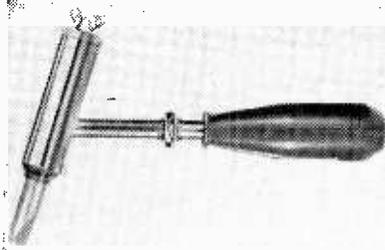

Soldering Tool

OBTAINABLE in any operating voltage from 6 to 250 V the Adcola R900, and R1000 soldering tools are fitted with 0.5 in diameter bits. Their rating is 50 W at 360°C. Total weight is 14½ oz. The bit is held by a wing nut at the back of the tool, providing an easy release of the bit should it seize up in its holder. The handle is made of fibre glass. Adcola Products Ltd., Adcola House, Gauden Road, London, S.W.4.

WW 315 for further details

MINIATURE FILTERS

COMMON electrical specifications of the Denesco EMI range of low pass filters include a temperature range of -55°C to +125°C without voltage de-rating, and a d.c. resistance through the filter of 0.01 Ω. Type 05-VB-90 has a guaranteed minimum attenuation of 100 dB from 1,000 to 10,000 Mc/s, and 90 dB from 200 to 1,000 Mc/s. The I-VE-50 has a diameter of 0.080 in and it is 0.280 in long. It will maintain an attenuation of over 50 dB from 200 Mc/s to 10 Gc/s and over. The insulation resistance is a minimum 20,000 MΩ at 25°C, and a minimum of 5,000 MΩ at 125°C. Denesco Inc., 2408 San Mateo Pl., N.E., Albuquerque, New Mexico.

WW 316 for further details

Draughting Aids

TRANSPARENT, self-adhesive labels printed by a heat-transfer process, can be printed with the required designs up to 3 in x 2 in in black. Known as Circuitape Draughting aids, they can be supplied reeled in cardboard dispensers. The range of applications include printed circuit pads and networks, logic symbols, and circuit symbols. There is also a standard range of telecommunication symbols to BS 530. Suitable for dye-line printing and photocopying. Minimum orders are one box of 500 symbols of one sort. B. & T. Designs (Richmond) Ltd., 70, High Street, Tring, Herts.

WW 317 for further details

Automatic Lighting Dimmer

THE Photolite Unit consists of a standard MK switch box containing a s.c.r. dimmer circuit. It is also fitted with a two selection push button and two pin socket. A separate housing contains a photo-electric cell. It is complete with twelve feet of cable and plug for connecting to the dimmer box. The photo-electric unit is mounted on a window looking out at natural daylight and the dimmer box can be mounted in

any convenient position and wired in series with the supply and the lighting load. The unit can be operated in either of two ways:—(a) With the selector switch in one position the variable control on the lid of the dimmer unit can be rotated manually to provide variation in the intensity of the artificial lighting from "off" to full intensity. (b) With the selector switch in the other position the variable control can be switched from the "off" to the "on" position and the photo-electric cell will then automatically control the intensity of the artificial lighting from 12½% to full intensity in proportion to the amount of natural daylight falling on to the photocell. Four models are available in the new Photolite range and these are for 250 to 1500 W, costing from £7 16s 0d to £17 0s 0d. Photain Controls Ltd., Randalls Road, Leatherhead, Surrey.

WW 319 for further details

Faster Thyristors

TWO new ranges of British developed silicon controlled rectifiers by International Rectifier, Hurst Green, Oxted, Surrey, are available to meet customer requirements of turn-off times down to less than 3 μs. Designated 8RCU and 10RCU these ranges are rated at 8A and 10A respectively with peak inverse/peak forward voltages of 50 V to 600 V in seven voltage grades. Under test conditions of a rate of rise of forward current of 5A/μs and rate of rise of re-applied forward blocking voltage of 20 V/μs, the base temperature of the 8RCU is 105°C and that of the 10RCU, 125°C; the forward current prior to turn-off is 8 A for the 8RCU and 10 A for the 10 RCU. A suffix is used to denote both the voltage rating and the guaranteed turn-off time. Example, with the type 8RCU5(3): 50 V maximum repetitive voltage; 75 V maximum transient voltage (5ms); 50 V maximum forward breakover voltage and a guaranteed turn-off time less than 3 μs.

WW 318 for further details

Avalanche Diode Oscillator

AN avalanche diode oscillator developed by Microwave Associates Ltd., provides a minimum 10 mW of c.w. power in a tunable waveguide mounting. Known as the MA4983X, it operates over the frequency range 9 to 14 Gc/s (using the MA4980X avalanche diode), and mates with either WR90 waveguide for X-band operation, or WR62 waveguide for Ku-band operation. Microwave Associates Ltd., Cradock Road, Luton, Beds.


WW 320 for further details

120 W Amplifier

A HIGH power silicon transistor power amplifier suitable for use as a vibrator driver has been introduced by Sinclair Radionics of 22 Newmarket Road, Cambridge. The output power into a 4 Ω resistive load is claimed to be 120 W from a full bridge output stage. The output transistors are RCA 2N3055 with 2N3054 drivers. With a 15 Ω resistive load, output power is 30 W. With a 4 Ω load, harmonic distortion is given as 0.5% (at mid and low frequencies) and for frequencies above 5 kc/s power output and distortion figures are not given. For a 15 Ω load, where output power is limited to

30 W, the amplifier is said to deliver its rated output up to 20 kc/s; for a 8 Ω load, up to 10 kc/s. Power requirements are 40 ± 1 V at 8.2 A peak (5.2 A mean). Input required: 1 V into 5.6 kΩ.

WW 321 for further details

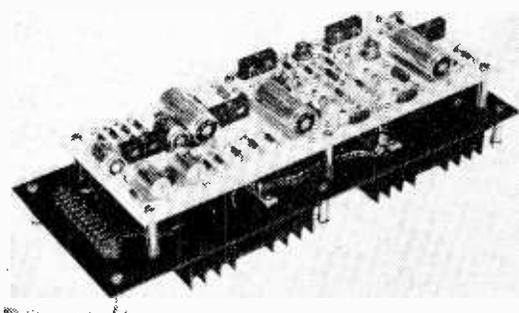


Transistor Holder

SEALECTRO has added a transistor holder to its "Press-Fit" line which will accommodate either TO-5 or TO-18 cans having three leads. Designated the RTC-305, the holder has three brass feed-through lugs which accept the leads of the TO-5 can. On a circumference inside that of the lugs are three holes through the Teflon bushing through which leads of the TO-18 holder are fed and wrapped around the lugs. For installation of the RTC-305, in production there is the Sealectro tool design-


nated B-29-X1. Sealectro Ltd., Walton Road, Farlington, Portsmouth, Hants.

WW 322 for further details

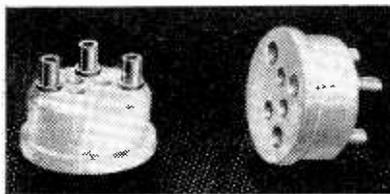

Screwless Terminals

THE "Modena" range of screwless plugs and terminals eliminates screw type connections. Each plug and terminal is fitted with a spring-loaded metal ball. When the stripped end of a wire is pushed into the plug and against the pressure of the spring loaded ball, it slips to one side of the ball, which immediately grips the wire tightly. Any attempt to remove the wire from the plug by pulling will only increase the grip on it. Release of the wire is obtained by pushing the ball down with a pointed instrument. A fully patented device, it is claimed to be free from loss or loosening of screws through vibration, and no tools are required for mounting.

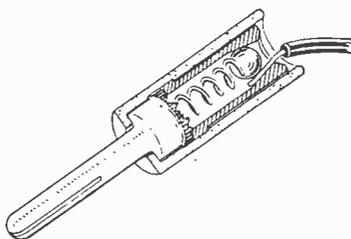

Provided in a comprehensive range including banana plugs, terminal blocks, plugs for television applications and connectors; miniature versions are also available. Techna (Sales) Ltd., 47, Whitehall, London, S.W.1.

WW 323 for further details


Potentiometers

CARBON composition potentiometers rated at 0.5 W and covering a range from 500 Ω to 10 M Ω in linear, log, semi-log, anti-log and other laws have been announced by A.B. Metal Products Limited, 119/127 Marylebone Road, London, N.W.1. These potentiometers, given the series number 45, are available with single or double taps, standard bush, plug-in or twist tab mounting, standard lug, printed circuit or wire-

wrap terminals; and with dual ganged or concentric controls. Mains switches can be fitted for high surge current conditions usually associated with silicon rectifier power circuits. The manufacturers claim that the Series 45, owing to its mechanical versatility and low cost, will permit appreciable saving in installation and replacement time.

WW 324 for further details

DIE-CAST BOXES

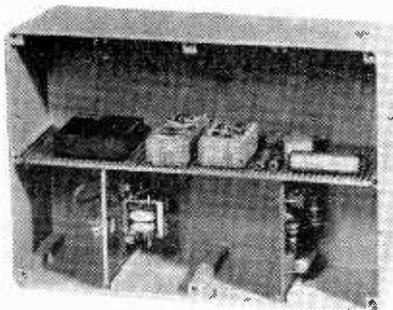

ALUMINIUM die-cast boxes available through STC Electronic Services, Edinburgh Way, Harlow, offer adaptability for equipment construction. The five sizes of this construction system range from 4 $\frac{1}{4}$ in \times 3 $\frac{1}{2}$ in \times 1 $\frac{5}{8}$ in deep to 10 $\frac{1}{2}$ in \times 6 $\frac{1}{2}$ in \times 2 $\frac{5}{8}$ in deep. Internal slots for screens and printed circuit boards are provided and specially designed ranges of Veroboard of suitable depth are available. They can be used as rigid chassis for mounting in instrument cases.

WW 325 for further details

Miniature Resistors

A LOW ohmic range of miniature resistors developed for transistor equipment has been introduced by the Resistor Division of the Plessey Components Group. Designated types TW and TP, these resistors are scaled down versions of the Group's present glass fibre cored resistors. They are available with both wire and printed-circuit terminations with a 0.3 in or 0.4 in spacing between pins. Finished in green silicone cement they have an overall resistance range from 0.22 Ω to 6.8 k Ω at a rating of 1 W. They are available in a copper wire wound version where the temperature coefficient characteristics of copper are desired. Cheney Manor, Swindon, Wilts.

WW 326 for further details

I. C. Test Set

FOR testing all present integrated circuit configurations, the 800 IC test set is available from Wessex Electronics Ltd., Bristol 1. It is also intended to accommodate any foreseeable future development in this field. There are facilities for rapid repetitive testing without reprogramming the instrument. The 800 possesses decade load resistors and capacitors, an optional integral pulse generator, and a read-out accuracy of 1% full scale. There is a test facility with a 10 \times 20 or 10 \times 40 crossbar matrix with provision for up to five external inputs. Provision is made for external d.v.m. or oscilloscope display, and there are integral d.c. supplies, with the option of digital programming.

WW 327 for further details

PUSHBUTTON SWITCH

WITH a diameter of $\frac{3}{4}$ in the Orcon 6-pole, double-throw illuminated switch manufactured in the U.S.A. is available from Litton Precision Products, 503, Uxbridge Road, Hayes, Middlesex. There is a selection of switch actions, switch bases, mountings, pushbutton and filter colours, and bulb types. Switch combinations range from 2 to 6-pole, all with double-throw action. The self-aligning, gold-impregnated, silver alloy contacts are individually isolated to eliminate arcing between circuits. The switching action is completed by 24 oz of pressure in 3/16inch of travel.

WW 328 for further details

Precision Potentiometers.—The low conformity of the Ferranti 11HL potentiometers mentioned on p. 102 of the February issue is better than $\pm 1\%$, not $\pm 10\%$ as stated.

LITERATURE RECEIVED

The 24-page catalogue D.10B lists the specifications of the rectangular D subminiature multi-way connectors manufactured by Cannon Electric (G.B.) Ltd., Lister Road, Basingstoke, Hants. There are five shell sizes offered with a range of 9 to 50 gold-plated copper contacts, and information on these (and the combination arrangements available) is provided. Non-magnetic, hermetically sealed connector types are also described.

WW 329 for further details

Available from Rank Audio Visual Ltd., Woodger Road, Shepherds Bush, London, W.12, is leaflet No. PROF 3/C.65/9.66/C. & S. which explains the **Cinemeccanica C 65 solid-state sound system**. This system is intended for cinemas with 70 or 35 mm installations, and gives brief descriptions of the units which make up the system. There are two separate 12-module pre-amplifier assemblies (one for each projector); system control and selector unit; power amplifier assembly; screen and ambient speakers as required.

WW 330 for further details

From Radiospares Ltd., P.O. Box 2BH, 4-8 Maple Street, London, W.1, the 83-page **Radiospares Catalogue** for Jan./Mar. 1967.

WW 331 for further details

Control and measuring instruments for process control systems in industrial and research applications, are specified in the 16-page "**Control Instrument**" brochure issued by Ether Ltd., Caxton Way, Stevenage, Herts. It describes temperature indicators and controllers, transducers, solid-state potentiometric temperature controllers, magnetic amplifiers, saturable reactors, and thyristor control units.

WW 332 for further details

Electro-chemical cells known as **VOLTABLOC**, are described in an eleven-page booklet, with the same title. Manufacturing processes, assembly of these **cadmium-nickel cells** into batteries, cell and battery data, discharge and charge curves, and physical dimensions are fully covered. Cadmium Nickel Batteries Ltd., Spedant Works, Park Royal Road, London, N.W.10.

WW 333 for further details

B.B.C. and I.T.A. television transmitters is the title of a pocket reference chart by Belling Lee Aerials Ltd., Heysham Road, Netherpton, Bootle 10, Lancashire. Channels, frequencies, and locations for BBC-1 television and v.h.f. sound stations are given. BBC-2 stations are listed with channels and expected opening dates. There is a list of I.T.A. transmitters with channel, polarization, and e.r.p. details.

WW 334 for further details

A two-part paper by Nexus Inc., on **operational amplifiers** has been received, and will be of interest to those involved with teaching basic analogue techniques. Part I, "An Introductory Laboratory Manual of Operational Amplifier Experiments," has eight pages devoted to operational amplifiers, and their use as fundamental analogue building blocks. There is an introduction, definitions, a list of required test equipment, and a guide to setting up ten laboratory experiments to illustrate examples of operational amplifier connections. Part II, "Operational Amplifier Quiz" is a 16-page questionnaire, intended to give some indication of a person's familiarity with the technology of operational amplifiers. Nexus Research Laboratory Inc., 480, Neponset Street, Canton, Massachusetts.

WW 335 for further details

A 15-page reprint of the article "**Gas Lasers**" by Dr. A. L. Bloom of Spectra-Physics Inc., U.S.A., has been published by Claude Lyons Ltd., Valley Works, Hoddesdon, Herts. This is available, free of charge, from the above company. Originally contained in the joint issue of the *Proceedings of*

the I.E.E.E. and Applied Optics for October 1966 it includes an introduction, historic background and a brief classification into types. Also discussed are the characteristics of the various lasers, including wavelength ranges, power output and gain, Doppler width, and the excitation mechanisms required to yield a particular output power. There is a short discussion on noise and coherence properties and a description of the continuous wave r.f. excited, ring discharge, argon ion laser.

WW 336 for further details

A range of **solid-state electronic tachometers** and their applications are discussed in an 8-page publication by Airpax Electronics Inc., Seminole Division, Fort Lauderdale, Florida, U.S.A. This instruction manual, number 700-0548 Rev. A, discusses the theory of operation, details tachometer characteristics, as well as giving electrical, mechanical and environmental specifications.

WW 337 for further details

Livingston Laboratories Ltd., Instrument Hire Division, Livingston House, Greycaine Road, North Watford, have issued an "**Instrument Hire Catalogue**." This 35-page publication gives the weekly hire charges (both short and extended terms) for counters, meters, oscillators, pulse generators, signal sources, oscilloscopes, recorders, and power supplies.

WW 338 for further details

Electroniques, the new S.T.C. component and equipment supply service for the radio and electronics amateur (see *Wireless World*, December 1966, p. 597) has issued its first annual, "**Hobbies Manual**" MG/222X 1967. This 600-page, illustrated publication, lists over 11,000 items of equipment, modules, components, tools, and accessories, of about eighty British and overseas manufacturers. Prices, dimensions, and electrical characteristics are given. It also contains circuits and design data for both valve and semiconductor equipment, a series of abacs, formulae, factors and tables. It is available at a cost of 10s 6d from Electroniques, Edinburgh Way, Harlow, Essex.

PUBLIC ADDRESS SHOW

TAPE recording and reproducing equipment, which is now an essential part of p.a., is only one aspect of this year's annual exhibition organized by the Association of Public Address Engineers, which is intended to illustrate the variety, sophistication and quality of modern public address systems. The show will again be held at the King's Head Hotel, Harrow-on-the-Hill, Middx, from March 14th-16th and will be open from 1400 to 2000 on the first day and from 1000 to 1730 on the other two days. Admission is free on presenting a business card.

This year's list of exhibitors is given below:—

Ampex	Magneta
Amplivox	Minnesota Mining & Mfg.
Audix	Mullard
B.B.C.	Peto Scott
Bauch, F. W. O.	Politechna (London)
C.T.H. Electronics	Pye Telecommunications
Cannon Electric	Radio & Electrical Retailing
Cosmocord	Rank Wharfedale
Denham & Morley	Reditune
E.M.I. Records	Rendar Instrumts
Electrical & Radio Trading and Electronics Weekly	Reslosound
Ferrograph Co.	Robinson & Newbery
Fi-Cord International	Rola Celestion
Goodmans Industries	S.N.S. Communications
G.P.O. Engineering Dept.	Shure Electronics
Gramplan Reproducers	Sound Coverage
Hammond, C. E.	Standard Telephones & Cables
International Broadcast Engineer	Vitavox
London Microphone Co.	Vortexion
Lustraphone	Wireless World and Electrical & Electronic Trader
Lyons, D., & Associates	

MARCH MEETINGS

Tickets are required for some meetings: readers are advised, therefore, to communicate with the society concerned

LONDON

1st. I.E.E., I.E.R.E., I.E.E.E. & R.T.S.—Colloquium on "Colour cameras" at 9.30 a.m. at the I.E.E., Savoy Pl., W.C.2.

1st. I.E.E. Grads.—"Measurements and the British calibration service" by H. E. Barnett at 6.30 at Waltham Forest Technical College, Forest Rd., E.17.

1st. B.K.S.T.S.—"Composition in picture and sound" by H. van der Horst & G. Newberry at 7.30 at the C.O.I., Hercules Rd., S.E.1.

2nd. R.T.S. & I.E.E.—Symposium on "Colour television production techniques" at 2.30 at the I.E.E., Savoy Pl., W.C.2.

6th. C.E.I.—"Making the Bosworth Report work": Conference sponsored by the Ministry of Technology and the Council of Engineering Institutions at 10 a.m. at I.E.E., Savoy Pl., W.C.2. (Registration fee 15s.)

6th. I.E.E.—"A u.h.f. tunnel diode amplifier" by M. K. McPhun and "Short-hop radio-relay systems using tunnel diode repeaters" by Dr. D. L. Hedderly, J. Hooper and M. K. McPhun at 5.30 at Savoy Pl., W.C.2.

8th. I.E.E.—"Thermodynamics in electrical networks" by Prof. P. Penfield at 5.30 at Savoy Pl., W.C.2.

8th. Soc. Environmental Engrs.—"Acoustics in the underwater environment" by T. N. Reynolds at 6.0 at Imperial College, Mechanical Engineering Dept., Exhibition Rd., S.W.7.

8th. S.E.R.T.—"Take care of colour" by E. Rout at 7.0 at the London School of Hygiene and Tropical Medicine, Keppel St., W.C.1.

8th. B.K.S.T.S.—"The design of studio mixers" by H. Burrell Hadden at 7.30 at the C.O.I., Hercules Rd., S.E.1.

9th. R.T.S.—"Problems and solutions of the shadow mask tube" by Dr. R. R. Bathelt and "A survey of colour television display tubes" by Dr. E. F. de Haan at 7.0 at the I.T.A., 70 Brompton Rd., S.W.3.

10th. I.E.E.—"Broadband transmission by radio and cable" by R. W. White at 5.30 at Savoy Pl., W.C.2.

10th. I.E.E.—Discussion on "The future education of electronic engineers" opened by Prof. G. D. Sims and Dr. B. H. Venning at 5.30 at Savoy Pl., W.C.2.

13th. I.E.E.T.E.—"Recent development in education and training aids" by R. C. Winton at 6.0 at the I.E.E., Savoy Pl., W.C.2.

14th. Radar & Electronics Assoc.—"The radar story 1945-1967" 6.0 at Mullard House, Torrington Pl., W.C.1.

15th. I.E.E.—"Ergonomics in electronic equipment and systems design" by B. Shackel at 6.0 at Savoy Pl., W.C.2.

15th. R.S.A.—Trueman Wood Lecture "Scientific achievements in the Services" by Sir Robert Cockburn at 6.0 at the R.S.A., John Adam St., W.C.2.

15th. B.K.S.T.S.—"Facsimile: pictures across the World" by E. H. Price at 7.30 at the C.O.I., Hercules Rd., S.E.1.

16th. I.E.E. & I.E.R.E.—Discussion on "Automatic processing of nucleonic isotope studies" at 2.30 at the I.E.E., Savoy Pl., W.C.2.

17th. I.E.E.—"Early days in radio research" by Dr. R. L. Smith-Rose at 5.30 at Savoy Pl., W.C.2.

20th. I.E.E., I.E.R.E. & Royal Soc.—Colloquium on "Automated cartography: scientific needs and engineering possibilities" at 2.30 at the I.E.E., Savoy Pl., W.C.2.

22nd. I.E.E.—"The theory of oscillators" by Dr. R. Spence and P. J. Baxandall at 5.30 at Savoy Pl., W.C.2.

22nd. I.E.R.E.—"Dynamic properties of audio frequency compressors" by K. O. Bäder at 6.0 at 9 Bedford Sq., W.C.1.

31st. I.E.E.—"Acoustic behaviour of materials" by Dr. R. W. B. Stevens at 5.30 at Savoy Pl., W.C.2.

31st. R.T.S.—"A history of television equipment" by G. R. M. Garratt at 7.0 at the Science Museum, South Kensington, S.W.7.

BATH

8th. I.E.R.E. & I.E.E.—"Communications and their effect on railway operation" by Prof. Banwell and H. H. Ogilvy at 6.0 at the Technical College.

BIRMINGHAM

2nd. I.E.E.—"Solid state devices" by Dr. G. T. Wright at 7.15 in the Dept. of Electronic and Electrical Engineering, the University.

14th. S.E.R.T.—"Stereo broadcasting" at 7.30 at the University of Aston, Gosta Green.

15th. R.T.S.—"Colour television production problems" by Ian Atkins at 7.0 at the B.B.C. Broadcasting House, Carpenter Rd., Edgbaston.

BRIGHTON

8th. I.E.E.—"Analysis and synthesis in control engineering" by R. E. Long and G. W. W. Pontin at 6.30 at the College of Technology, Moulsecoomb.

BRISTOL

21st. I.E.R.E. & Brit. Computer Soc.—"An introduction to microcircuitry" by Dr. R. A. Hyman at 7.30 at the University.

CAMBOURNE

14th. I.E.R.E. & I.E.E.—"Advances in laser technology" by Dr. R. C. Smith at 7.0 at Cornwall Technical College.

CAMBRIDGE

2nd. I.E.R.E. & I.E.E.—"Electronically assisted acoustics" by J. Moir at 8.0 at the University Engineering Dept., Trumpington St.

CARDIFF

8th. I.E.R.E. & I.E.E.—"Satellite control" by E. G. C. Burt at 6.0 at the Welsh College of Advanced Technology.

10th. R.T.S.—"Measuring instruments and techniques for colour television" by L. E. Weaver at 7.30 at the Angel Hotel.

21st. R.T.S.—"Colour receiver design" by B. Rogers at 7.30 at the Angel Hotel.

23rd. S.E.R.T.—"Electronics in photography" by C. W. Hooper at 7.30 at Llandaff Technical College, Western Ave.

CHELMSFORD

8th. I.E.R.E.—"Electronics in radio

astronomy" by Dr. D. M. A. Wilson at 6.30 at the Technical High School, Patching Hall Lane, Broomfield.

CHELTENHAM

17th. I.E.R.E.—"Autoland systems" by R. I. Bishop at 7.0 at the North Gloucestershire Technical College.

CHRISTCHURCH

15th. I.E.E.—"Compact frequency standards" by F. P. Newell and C. M. Groves at 6.30 at the King's Arms Hotel.

COVENTRY

21st. I.Prod.E.—"Numerically controlled machines" by A. W. Vickers at 7.15 at the Grosvenor Room, Hotel Leofric.

CROYDON

15th. I.E.E. Grads.—"Hi-fi quality sound reproduction" by J. Moir at 6.30 at the Technical College, Fairfield.

DURHAM

1st. I.E.E.T.E.—"Thyristor convertors" by J. D. McColl at 7.30 in the Science Laboratories at the University, South Rd.

EDINBURGH

8th. I.E.R.E. & I.E.E.—"Static relay techniques in protection" by M. Legg at 7.0 in the Dept. of Natural Philosophy, the University.

9th. I.E.R.E. & I.E.E.—Symposium on "Telemetry in medical and biological research" at 10 a.m. at the Royal Infirmary, Lauriston Pl.

FARNBOROUGH

9th. I.E.E. & I.E.R.E.—"Made to measure integrated circuits" by P. Cooke at 6.30 at the Technical College, Boundary Rd.

21st. I.E.E.—"Future developments in inertia navigation" by Dr. G. E. Roberts at 6.30 at the Technical College, Boundary Rd.

GLASGOW

9th. I.E.R.E.—"Static relay techniques in protection" by M. Legg at 7.0 at the Inst. of Engrs. & Shipbuilders, 39 Elmbank Cresc., C.2.

10th. S.E.R.T.—"Amateur radio" by T. P. Hughes at 7.30 at the Y.M.C.A. Club, Bothwell St.

LEICESTER

14th. I.E.R.E.—"Single-sideband transceivers" by E. T. Wilson at 6.30 at the University.

14th. R.T.S.—"Stereo broadcasting" by G. D. Browne at 7.15 at Vaughan College, St. Nicholas St.

LIVERPOOL

15th. I.E.R.E.—"The early days of ships' radio" by G. R. M. Garratt at the College of Technology, Byrom St.

NEWCASTLE-ON-TYNE

1st. S.E.R.T.—"Computer storage systems" by T. J. Allen at 7.15 at the Charles Trevelyan Technical College, Maple Terrace.

8th. I.E.R.E.—"Time sharing computer systems" by N. E. Heywood at 6.0 at the Inst. of Mining & Mech. Engrs., Neville Hall, Westgate Rd.

PLYMOUTH

1st. R.T.S.—"Television reception" by P. W. Crouch at 7.30 at the Studios of Westward Television Ltd.

14th. I.E.E.T.E.—"The future of aluminium in the electrical and radio indus-

tries" by A. G. Thomas at 8.0 in the Lower Hall, The Guildhall.

POOLE

1st. I.E.E.—"Adaptive processes for automatic control" by Prof. J. M. Nightingale at 6.30 at the Dolphin Hotel.

PORTSMOUTH

22nd. I.E.E.—"Compact frequency standards" by F. P. Newell and C. M. Groves at 6.30 at the College of Technology, Anglesea Rd.

READING

16th. I.E.R.E.—"The design of linear amplifiers" by Dr. E. A. Faulkner at 7.30 in the J. J. Thomson Phys. Lab. at the University.

SALISBURY

7th. I.E.E.—"Electronics in the automobile" by W. F. Hill at 6.30 at the Salisbury and South Wilts. College of Further Education, The Friary.

SOUTHAMPTON

14th. I.E.E.—Colloquium on "The applications of Gunn effect devices" at 5.30 at the Lanchester Theatre, the University.

16th. S.E.R.T.—"Lasers and their applications" by Dr. D. D. Bhawalkar at 7.30 at the College of Technology, East Park Terrace.

21st. I.E.R.E.—"Electronic equipment design" by T. G. Clark at 6.30 in the Lanchester Theatre, the University.

STAFFORD

14th. I.E.R.E.—"Mathematics for the engineer" by R. Wooldridge at 7.15 at the College of Further Education, Tenterbanks.

TWICKENHAM

16th. I.E.E. Grads.—"Medical electronics" by P. R. Styles at 6.30 at the College of Technology, Edgerton Rd.

WEYMOUTH

31st. I.E.E.—"Radio telescopes" by Dr. D. Herbison-Evans at 6.30 at the South Dorset Technical College, Newstead Rd.

LATE FEBRUARY MEETINGS

LONDON

20th. I.E.E.—Colloquium on "Precision resistance standards" at 2.0 at Savoy Pl., W.C.2.

22nd. I.E.R.E.—"A dual standard colour television receiver" by P. L. Mothersole, D. S. Hobbs and D. J. King at 6.0 at the London School of Hygiene and Tropical Medicine, Keppel St., W.C.1.

22nd. I.E.R.E. & I.E.E.—Discussion on "Electrodes for long-term physiological measurements" at 6.0 at the I.E.R.E., 9 Bedford Sq., W.C.1.

22nd. B.K.S.T.S.—"Colour television for the layman" by H. V. Sims at 7.30 at the I.T.A., 70 Brompton Rd., S.W.3.

23rd. I.E.E.—Discussion on "The Manley-Rowe relations" opened by Prof. J. Brown at 5.30 at Savoy Pl., W.C.2.

27th. I.E.E.—"Storage systems for telephone switching" by J. R. Pollard at 5.30 at Savoy Pl., W.C.2.



**THE HOUSE OF BULGIN
AT YOUR SERVICE**

ADDITIONS TO OUR LARGE AND VARIED STOCK



List No. S.I.B.825/Col.




List No. B.12




List No. S.A.2368




List No. S.A.2367



List No. DEV.191 4/1




D.882/Col/Leg.



D.916/M/SS/Col/Leg.




List No. D/S.753/Col.



List No. D.926




List No. E.H.24




List No. P.542




List No. F.296




List No. S.M.320



List No. S.M.593




List No. D/S.934/Col.




List No. S.M.270/D.B.



List No. K.544/K.C.I



D/S.936/Col/Leg.



M.P.22/Col.



List No. K.493

Send for our comprehensive components catalogue 5/- post free or free to trade letterhead on order

A. F. BULGIN & CO. LTD.,
Bye Pass Rd., Barking, Essex.
Tel: R1Ppleway 5588 (12 lines)

MANUFACTURERS AND SUPPLIERS OF RADIO AND ELECTRONIC COMPONENTS TO
ADMIRALTY MINISTRY OF WORKS S.S.C.
WAR OFFICE MINISTRY OF AVIATION G.P.O.
AIR MINISTRY MINISTRY OF SUPPLY I.T.A.
HOME OFFICE RESEARCH ESTABLISHMENTS N.P.L.
CROWN AGENTS U.K.A.B.A. D.S.R.

WW-119 FOR FURTHER DETAILS

The Doomsday Bug

OPEN confession being good for the soul I'll come clean about the title. I've lifted it from the November 1966 issue of *Science Journal* where it headed a "guest leader" written by Lord Ritchie-Calder.

In this the author develops the proposition that psychologically induced inhibition of free discussion provides a cloak of security for the prosecution of biological warfare. He points out that 20 years ago Frederic Joliot-Curie, in a paper called "The Secret War" showed that the next outbreak need never be declared. It could go on for years, he said, with only the hidden aggressors being aware that it was happening. Then, by degrees, the penny would drop; successive crop failures, a series of human epidemics and a catastrophic fall in the birthrate (sterilization by chemicals in the water supplies) would gradually bring to the attacked a realization that it wasn't all bad luck, but that skulduggery was afoot. By which time it would be too late.

Without wishing to emulate the fat boy of "Pickwick Papers" by wanting to make your flesh creep, I must say that it seems to me that there is an astonishing resemblance between Joliot-Curie's prophecy and the present unenviable state of our native electronics industry (using the word "industry" in its Pickwickian sense, of course).

Working on the, perhaps unjustifiable, premise that I have a quorum of three readers I have, by this statement invoked three possible schools of thought, namely:—

- (a) That's very true, or
- (b) It's wildly exaggerated, or
- (c) This man's off his rocker.

Reader (a) as a reward for perspicacity can cut reading the rest of this piece and get down to the small ads. No sense in preaching to the converted. Readers (b) and (c) are advised to try to equate Joliot-Curie's prediction with present events in the electronics industry; for instance, in place of his "crop failures" substitute our own inability to supply the home market with the right goods at the right prices in such areas as computers, peripheral equipment, semiconductors, instruments and many others (as witness the steady increase in imports of these devices). Compare his "human epidemics" with the brain drain which is relentlessly sapping our native engineering effort. Consider his "falling birthrate" in terms of the general decrease in share values of British electronics firms (one example: from 25s in 1964 to 5s 6d in 1966). Ponder also others which come to mind and perhaps the parallel will begin to take shape.

For there are wars and wars and the one in which we are in up to our respective necks is a trade Armageddon. It is an all-out, cut-and-thrust, no-holds-barred, no-quarter-given (and any other appropriate cliché you can bring to mind) kind of war. There are no prizes for guessing who the other side is.

If you still don't believe me, sit back in the old rockin' chair (genuine hill-billy model) and pause and consider any aspect of the industry you please, comparing it with the situation as it existed ten years ago.

Look for a moment at sound radio and TV. (You'd rather not? Come, come! Steel yourself!) In 1959 there were about 25 British companies in the field. Today, six groups (it may be five by the time this is published) account for almost all our production and the U.S.A. has a financial in-

terest in several of these. And, turning to the components industry, do you realize that in 1964 we were a net importer of semiconductor devices, variable capacitors, resistors, microphones and tape recorder accessories and parts? (I learned this from the recent Electronics E.D.C. Report.)


In aviation you will have noted how the swing-wing aircraft, a British invention, is being sold back to us and that we are now buying Phantoms as well as the F111s for the R.A.F. It's no use saying "Tough luck, chums" to the British aviation industry and forgetting all about it, because those aircraft will be bunged up to the ailerons with electronic equipment and precious little of it will be ours. But the Phantoms and F111s are only the thin end of the wedge, for aviation electronics has now passed out of the phase where it was merely tacked-on ancillary equipment. Subsequent generations of aircraft will be built around the electronics; still, with luck we might, if we're very good boys, be permitted to service the all-American equipment. With all-American test-gear of course.

In the matter of world communications we've put up a very good export showing in the past. But the first satellite which went into orbit bleeped out some very rude words in the sky for us. They were to the effect that world communications is no longer merely a matter of electronics know-how, for before you can catch words from that sky-ranging ball you've got to be able to throw the ball up there. And we can't do it. So, we've got to go cap in hand to the big boy who lives over the way and ask him please will he do it for us?

I needn't dwell on the integrated circuit situation. Things are getting to a stage where you can't put a foot down on this sceptred isle without treading on American i.c.s. And it's going to get a lot worse. The crux of the matter is that in the present state of the art you can't turn out competitively priced i.c.s in small batches. So the home industry, such as it is, with half its home market already filched, with no export market in prospect and no significant Government orders, can't possibly compete in price with the U.S.A. Thanks to their vast Government-sponsored research, development and production, plus their thrusting business acumen, the Americans have cornered the market.

So, unless we snap out of our trance and come to realize that there's a cold, cold war being waged from the West, we can resign ourselves to a decimated industry which will exist only as an American subsidiary.

Now, in spite of what you may think, I don't go around chalking "Yanks go home!" on walls. We're all in the business jungle and they're only doing to us what we would do to them if we had the chance. The only hard feelings I have are reserved for our own industry which dodders from committee to committee like sheep having no shepherd. Except that sheep have more sense than to go into committee for three years before jumping a fence. Neither, I hope, am I a defeatist. I believe we can still beat the opposition if the industry is first integrated to a common purpose. Sections of the industry have got to stop regarding themselves as isolated sub-industries each trying to fight its own private little battle, for this war is on all fronts of electronics.

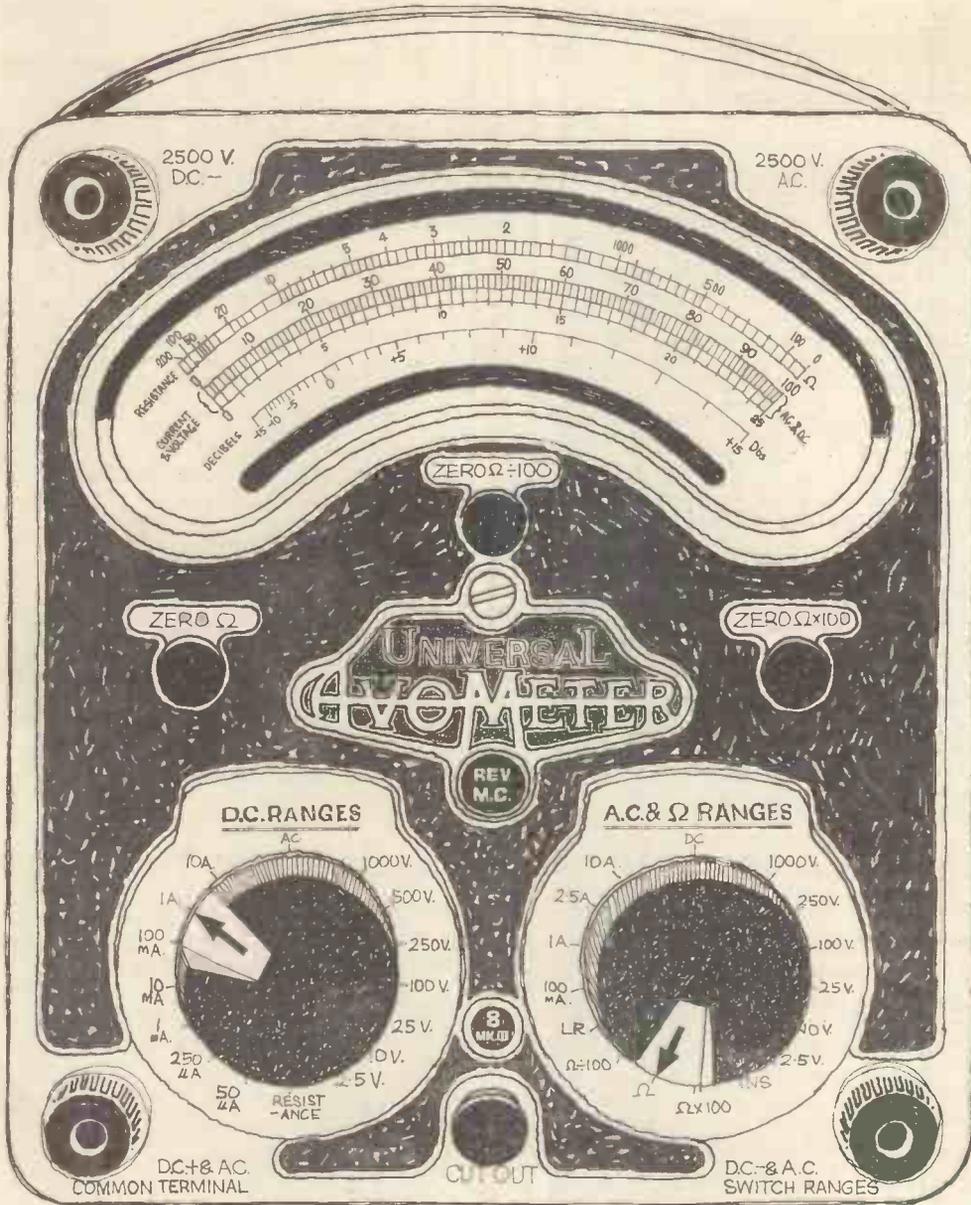

'don't monkey with success'

That's what they told us when we wanted to glamourize the Avometer's looks to match its modern-as-tomorrow internal circuitry and meter movement. 'Avometer', they told us, is the household word for a high-sensitivity, accurate and super-rugged multirange meter. You, they told us, like the way Avometers handle, know you can trust their performance, have a genuine affection for them. OK, you win. Get your Model 8 Mk. III (illustrated) or Model 9 Mk. II (with International scales and symbols) from your local supplier or Avo Ltd., Avocet House, Dover, Kent. Telephone Dover 2626. Telex 96283.



AVΩ MEANS BASIC MEASUREMENTS ALL OVER THE WORLD

WW-004 FOR FURTHER DETAILS



Top Performance at rock-bottom prices with money-saving Heathkit Instrument Kits.

The construction manual provided with the kit ensures successful assembly.



5in. Flat-face GENERAL PURPOSE OSCILLOSCOPE Model 10-12U

An outstanding oscilloscope

"Y" sensitivity 10 mV. r.m.s. per cm. at 1 kc/s. Bandwidth 3 c/s-4.5 Mc/s. Frequency compensated input attenuator X1, X10, X100, T/B. 10 c/s-500 kc/s. in 5 steps. Two extra switch selected pre-set sweep frequencies in T/B. range. T/B. output approx. 10 v. peak to peak. Built-in IV calibrator. Facility for "Z" axis modulation. Electronically stabilised power supply. Power req. 100-250 v. A.C. 40-60 c/s. 80 watts. Fused. Front panel, silver and charcoal grey. Cabinet, charcoal grey, size 8½ × 14 × 17in. deep. Net weight 23lb. 56-page construction and operation manual.

Kit.....£35.17.6 Assembled £45.15.0

De Luxe 6in. VALVE VOLT-METER Model IM-13U

Modern styling. Extra features. The ideal VVM for the Electronic Engineer. 6in. Ernest Turner 200µA. meter with multi-coloured scales. Unique gimbal bracket allows bench, shelf or wall mounting. Measures A.C. (r.m.s.), D.C. volts 0-1.5, 5, 15, 50, 500, 1,500. Resistance range 0.1 to 1,000MΩ with int. battery. Vernier action zero and ohms adjustment. Roller-tinned printed circuit. High input resistance (11MΩ). Comprehensive assembly and operation manual. Size 5 × 12½ × 4½in. Complete with test prod and leads.

Kit.....£18.18.0 Assembled £26.18.0

H.V. and R.F. Probes available as optional extras.



3in. PORTABLE SERVICE OSCILLOSCOPE Model OS-2

Modern styling, lightweight and compact size, make this the ideal 'scope for service man, laboratory technician, amateur radio enthusiast or hobbyist. "Y" bandwidth 2 c/s-3 Mc/s ± 3 dB. Sensitivity 100 mV/cm. TB 20 c/s-200 kc/s. in four ranges. Mu-metal c.r.t. screen. Dimensions 5in. wide × 7½in. high × 12in. deep. Wt. 9½lb.

Kit.....£23.18.0 Assembled £31.18.0

Outstanding value in a low-priced 'scope.



LOW-PRICED SIGNAL GENERATOR. Model RF-1U

Provides extended frequency coverage on 6 bands on fundamentals and harmonics. Ideal for the alignment and trouble shooting of RF, IF and audio circuits. Large, easy-to-read dial. Pre-aligned coil and bandswitch assembly. RF output of at least 100 millivolts. 100 kc/s—100 Mc/s. fundamentals, up to 200 Mc/s harmonics. 400 cycle audio signal with 4 v. output. Dimensions 9½in. wide × 6½in. high × 5in. deep.

Kit....£13.18.0 Assembled £20.8.0



See the full range of Heathkit models in the free catalogue

LOW-COST ANALOGUE COMPUTER. Model EC-1U

Serves a variety of Educational and Industrial needs. Simple to build and use. Solves complex mathematical problems quickly. Excellent for training Engineering, Physics and Maths students in the principles and applications of analogue computers. Features include: 9 d.c. operational amplifiers with provision for balancing without removing problem setup. 3 meter ranges, built-in power supplies incl. 3 initial condition supplies, repetitive oscillator, 5 co-efficient potentiometers. Assortment of components and leads included for problem setting up. Separate operational manual supplied with kit. Modern styling, compact size 19½ × 11½ × 16in. deep. Wt. 36lb.

Kit....£97.8.0 Assembled £122.0.0



TRANSISTOR TESTER Model IM-30U

Unmatched for quality and performance at the price.

Provides a complete d.c. analysis of PNP and NPN transistors and diodes. D.C. gain (Beta, Alpha) is read direct on calibrated scales. Four level switches facilitate fast, easy, test selection. Internal batteries for tests up to 9 v. Provision for connection to ext. power supply for higher input resistance. Modern functional styling. Size 5½in. high × 10½in. wide.

voltage and current tests. deep × 10½in. wide.

Kit.....£25.18.0 Assembled £36.10.0

Outstanding value in a D.C. supply! REGULATED POWER SUPPLY, Model IP-20U (Fully transistorised)



A good example of modern advanced design in instruments at a substantial saving in cost over comparable models. Its all-transistor circuitry will deliver up to 1.5 amps from 0.5 to 50 volts D.C.—with metered output voltage and current facility—adjustable current limiter protects both the supply and the circuit under test—overload relay protection against a short circuit or heavy overload. Modern styling, compact size. 9½ × 6½ × 11in. deep. A must for any laboratory.

Kit.....£35.8.0

Assembled £47.8.0

HARMONIC DISTORTION METER Model IM-12U

Will give fast, accurate noise and distortion measurement in amplifiers, receivers, transmission lines, speakers, etc. Measurements are read directly on large meter. High input impedance, precision components and Wien bridge circuit design assure excellent sensitivity and high accuracy in all applications. Freq.: 20 cycles to 20,000 cycles. Distortion: 1, 3, 10, 30, 100% f.s.d. Voltmeter: 0, 1, 3, 10, 30 volts f.s.d. Input resistance 300kΩ. Dimensions 13 × 8½ × 7in. deep. Wt. 11lb.

Kit....£26.15.0 Assembled £36.0.0



Many other models for Hi-fi enthusiasts, Radio Amateurs etc. See other page for details.

● Prices quoted above are Mail Order prices ●

● Prices include free delivery in U.K. ●

DAYSTROM LTD.

DEPT. W.W. 3, GLOUCESTER, ENGLAND

FREE BROCHURE AVAILABLE ON THE BRITISH INSTRUMENT RANGE OF MODELS

WW-005 FOR FURTHER DETAILS

See the **HEATHKIT EXHIBITION** (concurrent with **THE AUDIO FAIR**)
at the **GRAND HOTEL, SOUTHAMPTON ROW, LONDON, (Admission Free)**
THURSDAY, FRIDAY, SATURDAY & SUNDAY Mar. 30th - Apr. 2nd 11 am. - 9 pm. (Sun. 8 pm.)

3+3 W HI-FI STEREO AMPLIFIER KIT Model S-33H

An inexpensive stereo-mono amplifier with the high sensitivity necessary for lightweight miniature ceramic pick-ups (e.g., Decca Deram). De luxe version of the S-33 with attractive two-tone grey Perspex panel.
Kit £15.17.6 Assembled £21.7.6

5 W HI-FI MONO AMPLIFIER KIT Model MA-5

A low-priced general purpose HI-Fidelity amplifier based on the popular S-33 for those who do not require a stereophonic system. Separate bass and treble controls. Gram and Radio inputs. Suitable for most crystal pick-ups. A printed circuit simplifies construction.
Kit £11.9.6 Assembled £15.15.0

MONO CONTROL UNIT KIT Model UMC-1

Ideal for use with MA-12 or similar amplifier. Output 0.25 v. Send for full details.
Kit £9.2.6 Assembled £14.2.6

FM TUNER KIT, Model FM-4U

Tuning range 88-108 Mc/s Flywheel tuning. Attractive perspex front panel in two tone grey with golden trim. Thermometer type tuning indicator, pre-aligned I.F. transformers. Own built-in power supply. Tuning heart model FMT-4U £2/15/- incl. P.T.
I.F. amplifier and power supply, Model FMA-4U. Complete with case and valves £13/13/- Sold separately.
Kit Total £16.8.0

MULTIMETER KIT Model MM-1U

Provides wide voltage, current, resistance and dB ranges to cover hundreds of applications. Sensitivity 20,000 ohms/volt D.C. and 5,000 ohms/volt A.C. Ranges: 0-1.5 v. to 1,500 v. A.C. and D.C.; 0-150µA to 15 A. D.C. measures resistance from 0.2Ω to 20MΩ. 4½in. 50µA meter. A polarity reversing switch eliminates transferring test leads when alternately measuring + and - voltages.
Kit £12.18.0 Assembled £18.11.6

AUDIO SIGNAL GENERATOR KIT Model AG-9U

10 c/s to 100 kc/s., switch selected. Distortion less than 0.1%. 10 v. sine wave output metered in volts and dBs.
Kit £23.15.0 Assembled £31.15.0

DECADE RESISTANCE BOX KIT Model DR-1U.

Range 1-99,999Ω in 1Ω Steps. Ceramic switches throughout. Current rating from 500 mA. to 5 mA., according to decades in circuit. Polished wooden cabinet supplied complete.
Kit £10.18.0 Assembled £14.18.0
● Prices include Postage U.K.

HI-FI STEREO AMPLIFIER KIT Model S-99

18 w. output (9 per channel with 0.2 per cent. distortion at 9 w. per channel). It has ganged controls. Stereo/Mono gram, radio and tape recorder inputs and push-button selection. Ultra-linear push-pull output. P.C. boards. Attractive Perspex front panel with golden surround and grey metal cabinet.
Kit £28.9.6 Assembled £38.9.6

HI-FI SPEAKER SYSTEM KIT Model SSU-1

Ducted-port bass reflex cabinet "in the white." Frequency response is 40-16,000 c/s. Power rating 10 watts. Matched speaker units 8in. high flux (12,000 lines) with hyperbolic cone and 4in. wide angle dispersion type for higher frequencies.
Kit (with legs) £12.12.0 (less legs) £11.17.6 (inc. P.T.)

A.M./F.M. TUNER KIT

Tuning range 88-108 M. (FM) 16-50, 200-550, 900-2,000 m. Flywheel tuning. Attractive Perspex front panel in two-tone grey with golden trim. Thermometer type tuning indicator, pre-aligned I.F. transformers. Switched wide and narrow A.M. bandwidths.
TUNING HEART Model AFM-TI £4/13/6 (inc. P.T.)
I.F. AMPLIFIER and Power Unit Model AFM-I. Complete with metal cabinet and valves £22/11/6. Sold separately.
Kit Total £27.5.0

OXFORD TRANSISTOR PORTABLE RADIO KIT Model UXR-2

Beautiful leather case. Easy-to-read scale. 10 semi-conductors. Printed circuit board. Special loudspeaker. Sockets for earphone tape recorder, car aerial, 9-volt battery operated. Easy to construct, excellent in performance and value.
Kit £14.18.0 (incl. P.T.)

SINE/SQUARE GENERATOR Model IG-82U

Covers 20 c/s-1 Mc/s. in 5 bands. Simultaneous Sine and Square Wave outputs. Less than 0.15µS rise time and on Square Wave. Less than 0.5% distortion on Sine wave. Up to 10 volts output. This attractively styled generator is designed for maximum operating convenience. Size 13in. x 8½in. x 7in. deep.
Kit £25.15.9 Assembled £37.15.0

ELECTRONIC WORKSHOP KIT EW-1

20 exciting experiments can be made with this one kit.
Kit £7.13.6 (incl. P.T.)
● Deferred Terms available on all orders above £10.

HI-FI MONO POWER AMPLIFIER KIT Model MA-12

A compact Hi-Fidelity power amplifier (including auxiliary power supply). 12 watts output. Wide frequency range and low distortion. A variable sensitivity control is fitted enabling it to be used with an existing amplifier in a stereophonic system. Other applications includes sound reinforcement systems, transmitter modulators, for use with tape recorders.
Kit £12.18.0 Assembled £16.18.0

"COTSWOLD" SPEAKER SYSTEM KIT

This acoustically designed enclosure measures 26 x 23 x 14½in., and houses a special 12in. base speaker with 2in. speech coil, elliptical middle speaker, together with a pressure unit to cover the full frequency range of 30-20,000 c/s. Its polar-distribution makes it ideal for really Hi-Fi Stereo. Delivered complete with speakers, cross-over unit, level control, grille cloth, etc. Left in the white for finish to personal taste, all parts are pre-cut and drilled for ease of assembly.
Kit £25.12.0 Assembled £33.17.0

4½in. VALVE VOLTMETER KIT Model V-7A

The world's most popular valve voltmeter with printed circuit and 1 per cent. precision resistors to ensure consistent laboratory performance. It has 7 voltage ranges measuring respectively D.C. volts to 1,500 and A.C. to 1,500 r.m.s. and 4,000 peak to peak. Resistance measurements from 0.1 ohm to 1,000 megohms, with internal battery. D.C. input resistance is 11 megohms and dB measurement has a centre-zero scale. Complete with test prod, leads and standardising battery. Power requirements, 200-250 v. 40-60 c/s. A.C. 10 watts. H.V. and R.F. Probes available as optional extras.
Kit £13.18.6 Assembled £19.18.6

LOW PRICED SINE/SQUARE GENERATOR KIT, MODEL AOIUW

This inexpensive generator covers 20 c/s- 150 kc/s with a choice of sine or square waves, the latter up to 50 kc/s. Output voltage ranges Sine-wave- 0-100 mV., 0.1 v., 0.10 v. Square wave 0-800 mV., 0-8 v., 0-80 v.
Kit £14.15.0 Assembled £21.5.0

DECADE CAPACITOR KIT Model DC-1

Capacity values 100µF to 0.11µF in 100µF steps. Precision silver-mica capacitors and minimum loss ceramic water switches ensures high accuracy.
Kit £7.15.0 Assembled £10.18.0

TELEVISION ALIGNMENT GENERATOR KIT Model HFW-1

Offers the maximum in performance, flexibility and utility at the lowest possible cost. Several outstanding features have been incorporated in this model which are unusual in instruments in this price range. Frequency coverage 3.6 Mc/s. to 220 Mc/s. on fundamentals. Unique non-mechanical sweep oscillator system. High level output on all ranges. Sweep deviations up to 42 Mc/s. Built-in fixed and variable marker generator (5 Mc/s. crystal supplied).
Kit £38.18.0 Assembled £49.15.0
● Prices quoted are Mail Order Prices; retail prices 5% extra.

DAYSTROM LTD.

DEPT. W.W.3. GLOUCESTER, ENGLAND

Member of the Schlumberger Group including the Heath Company.

MANUFACTURERS OF THE WORLD'S LARGEST-SELLING ELECTRONIC KIT-SETS

WW-006 FOR FURTHER DETAILS

Thoroughly



dependable

AMATEUR TRANSMITTER KIT



Model DX-40U
Covers all amateur bands from 80 to 10 metres, crystal controlled. Power input 75 watts C.W. 60 watts peak controlled carrier phone. Output 40 watts to aerial. Provision for VFO. Filters minimise T.V. interference. Modulator and power supplies are built-in. Single knob band switching is combined with a pi-network output circuit for complete operating convenience. A high-grade moving-coil meter indicates the final grid or anode current. Provision is made for the use of 3 crystals with access through a trap-door in the back of the cabinet. A 4-position switch selects the appropriate crystal or a jack for external VFO which can be used instead of the crystal(s). *Prices now reduced to:—*

Kit .. £29.19.0 Assembled £41.8.0

GENERAL COVERAGE RECEIVER KIT RG-1

An inexpensive communications type receiver specially designed for the short wave listener with many refinements found only in receivers costing much more. Freq. coverage 32 Mc/s-1.7 Mc/s in 5 ranges also M.W. band. Kit .. £39.16.0 Assembled £53.0.0
Optional extras available.

GRID-DIP METER KIT. Model GD-1U



Functions as oscillator or absorption wavemeter. With plug-in coils for continuous frequency coverage from 1.8 Mc/s to 230 Mc/s.

Kit .. £11.9.6 Assembled .. £14.9.6

Additional Plug-in Coils Model 341-U extend coverage down to 350 kc/s. With dial correlation curves. 17/6.

TRANSISTOR INTERCOM KITS Models XI-1U and XIR-1U

9 v. battery operated. Up to five remote stations can be operated with each Master. The Master unit can call any one, combination, or all five Remote stations and any Remote station can call the Master.

Model XI-1U (Master)

Kit .. £11.9.6 Assembled .. £17.9.6

Model XIR-1U (Remote)

Kit .. £4.9.6 Assembled .. £5.18.0

OSCILLOSCOPE TRACE DOUBLER KIT Model S-3U



This device will extend the use of your single-beam oscilloscope and, at a nominal cost, will give you the advantages of a double (or other multiple) beam scope.

Kit £13.10.0 Assembled £19.10.0

OSCILLOSCOPE ACCESSORY KITS

Demodulation Probe kit 337-C £2.17.6

Low-cap Attenuator Probe kit Pk-1 £3.12.6

See also Oscilloscope page.

AMERICAN MARINE MODELS

Prices include carriage, duty, import levy, etc.

DIRECTION FINDER MR-21A

3WB transistor circuit. Kit .. £56.0.0

DEPTH SOUNDER MI-11A

Soundings to 200ft. Kit .. £35.10.0

FUEL VAPOUR DETECTOR MI-25

Transistor circuit. Kit .. £23.0.0

TACHOMETER MI-31A

6, 12, 24 or 32 v. D.C. Kit .. £13.0.0

Please send for details.

• Prices include free delivery

"MOHICAN" GENERAL COVERAGE RECEIVER KIT

Model GC-1U

This fully transistorised receiver which includes 4 piezo-electric transmitters, is in the forefront of receiver design. It is an excellent portable or fixed station receiver. The R.F. "front-end" is supplied as a pre-assembled and pre-aligned unit. Its many features include a 10-transistor circuit, printed circuit board, telescopic whip antenna tuning meter, and a large slide-rule dial giving a total length of approximately 70 inches. Housed in a steel cabinet and powered by two 6 volt dry batteries (not supplied), mounted internally, it gives frequency coverage from 580 kc/s to 30 Mc/s. in five bands; thus enabling world-wide reception. Electrical bandspread covers the amateur bands from 80 to 10 metres—each band having a scale length of approximately 8 inches, BFO tuning and Zener diode stabiliser. Size 6 3/4 in. x 12 in. x 10 in.



Please write for specification leaflet.

Kit .. £37.17.6 Assembled .. £45.17.6

STABILISED POWER PACK Models MSP-1M and MSP-1W

Specially recommended for industrial and laboratory use, meeting the need for a reliable and versatile stabilised power pack capable of a very high performance. Input 200-250 v. 40-60 c/s. A.C., fully fused. Outputs: H.T. 200-410 v. D.C. at 0-225 mA. in 3 switched ranges. Unstabilised A.C., 6.3 v. at 4.5 A. centre-tapped. Two 3 in. "easy-to-read" meters for reading voltage and current simultaneously. Separate L.T. and H.T. supply transformers. All output circuits are isolated. Size 13 in. x 8 1/2 in. x 9 1/2 in.



MSP-1M (with meters)

Kit .. £36.12.6 Assembled .. £43.12.6

MSP-1W (less meters)

Kit .. £29.17.6 Assembled .. £36.17.6


BALUN COIL UNIT KIT

Model B-1U. Will match unbalanced co-axial lines to balanced lines of either 75 or 300Ω impedance. Frequency range 10-80 m., input up to 200 watts.

Kit .. £5.5.6 Assembled .. £5.18.0

TAPE PRE-AMPLIFIER KITS Models TA-1M and TA-1S

The Combined Tape Record/Replay Amplifier is available in both monophonic and stereo-phonetic models. Model TA-1M can be modified to the stereo version with modification kit TA-1C.



TA-1M Kit £19.18.0 Assembled £28.18.0

TA-1S Kit £25.10.0 Assembled £35.18.0

TA-1C Kit .. £6.15.0

All prices are mail order and include free delivery in the U.K.

Deferred Terms

are available on all orders above £10

• Specification of any model available on request

AMATEUR TRANSMITTER KIT

Model DX-100U



The World's most popular Amateur TX Kit

- Completely self-contained. 150 w. D.C. input.
- Built-in highly stable VFO and all Power Supplies.
- The KT88 high-level anode and screen modulator stage gives over 100 watts of audio from less than 1.5 mV. input.
- Keying on CW is via the VFO and buffer amplifier cathodes; the other RF valves are biased beyond cut-off.
- Provision has been made for remote control operation.
- Covers all Amateur bands up to 30 Mc/s. phone or CW.

Kit .. £81.10.0 Assembled .. £106.15.0

AMATEUR BANDS RECEIVER KIT

Model RA-1 The ideal economically priced fixed station, portable or mobile receiver covering the Amateur bands from 160-10 m., each band separately calibrated on a large illuminated slide-rule dial. Features: Signal strength meter, tuned RF amplifier stage, half-lattice filter, adjustable noise limiter. Freq. coverage 160, 80, 40, 20, 15, 10 metre bands, I.F. 1620 kc/s. Kit .. £39.6.6 Assembled £52.10.0



AMERICAN HEATHKIT SINGLE SIDE BAND EQUIPMENT

Transmitters, Receivers, Transceivers. Send for details of models. Fully illustrated American Catalogue of Heathkit range sent for only 1/-, post-paid.

REFLECTED POWER METER KIT

Model HM-1U Indicates, reliably but inexpensively, whether the R.F. power output of your transmitter is being transferred efficiently to the radiating antenna. Kit .. £8.10.0 Assembled £10.15.0

VARIABLE FREQUENCY OSCILLATOR KIT. Model VF-1U

Specially designed to meet the demand for the maximum possible flexibility from an amateur Transmitter which would otherwise be subject to certain limitations imposed by crystal control. Calibrated for all Amateur bands 160-10 metres, fundamentals on 160 and 40 m. Ideal for Heathkit DX-40U and similar transmitters. Kit .. £10.17.6 Assembled £15.19.6



Q MULTIPLIER KIT. Model QPM-1

A reasonably priced Q Amplifier for the amateur and short-wave enthusiast. This self-powered unit (200-250 v. 50/60 c/s) may be used with communications receivers to provide both additional selectivity and signal rejection. Models QPM-1 for 470 kc/s. I.F. QPM-16 for 1.6 Mc/s. I.F. Kit, either model £8.10.0 Assembled £12.14.0



AERIAL TOWER KITS. Model HT-1, HT-1G

Height 32ft., sq. section 3ft. x 3ft. at base (no stays required). Accessories available as extras: HT-1G Kit (galvanised) £43.15.0 HT-1 Kit (red oxide) £37.15.0

• Prices quoted are Mail Order, retail prices in general 5% extra

DAYSTROM LTD.

DEPT. W.W.3, GLOUCESTER, ENGLAND

Member of the Schlumberger Group including the Heath Company.

MANUFACTURERS OF THE WORLD'S LARGEST-SELLING ELECTRONIC KIT-SETS

WW-007 FOR FURTHER DETAILS

See the **HEATHKIT EXHIBITION** (concurrent with **THE AUDIO FAIR**) at the **GRAND HOTEL, SOUTHAMPTON ROW, LONDON.** (Admission Free) **THURSDAY, FRIDAY, SATURDAY & SUNDAY Mar. 30th - Apr. 2nd 11 am. - 9 pm. (Sun. 8 pm.)**

A new dimension in **SOUND!** Listen to the **BBC FM Stereo** broadcasts on your existing tuner by converting it to Stereo with a low-cost transistorised **FM DECODER, Model SD-1.**

Specially designed for use with Heathkit tuners, models **FM-4U** and **AFM-1**, but, because it is self-powered, it may also be used with most other makes of FM tuner.

- ★ Can be used with most valve/transistor FM Tuners
- ★ Self-powered
- ★ Solid state—7 transistor, 1 silicon diode circuitry
- ★ Automatic stereo indicator
- ★ Compact—free standing unit
- ★ So easy to build. So easy to operate

Complete instructions given in manual for interconnection to Heathkit models and general guidance for other tuners.

KIT £8.10.0 Assembled £12.5.0



BERKELEY Slim-line SPEAKER SYSTEM

A new concept in Heathkit loudspeaker design. The cabinet shell is assembled and finished in superb Queensland walnut veneer. Two specially designed speakers, a 12in. bass unit and 4in. mid/high frequency unit and an L.C. cross-over network provide the smooth 30-17,000 c/s. frequency response. Its professional cabinet styling will blend with both traditional and contemporary decors. 15 ohm nominal impedance. Size 26in. X 17in X 7½in. deep.

KIT.....£19.10.0 Assembled—£24.

The outstanding 20+20 WATT TRANSISTOR STEREO AMPLIFIER Model AA-22U

- ★ Professional, elegant, slim-line styling.
- ★ 5 stereo inputs (each channel).
- ★ 20 transistor, 10 diode circuit.
- ★ Superb performance for price.
- Dimensions: 15⁹/₁₆in. w. x 3⁷/₈in. h. x 12¹/₂in. deep. Kit **£39/10/-** less cabinet. Assembled **£59/15/0** incl. cabinet.



Optional extra Walnut veneered cabinet **£2.5.0.**

COMPARE ANY HEATHKIT MODEL FOR PRICE, PERFORMANCE, QUALITY

Enjoy the **BBC stereo FM transmissions** with the **New De Luxe**

TRANSISTOR STEREO FM TUNER (Model TFM-IS)

Mono version **TFM-IM** also available.

Designed to harmonise and match the "International Class" de luxe transistor amplifier, **AA-22U.**

- ★ Professional, elegant, slim-line styling
- ★ Tuning range 88-108 Mc/s.
- ★ 14 Transistor, 4-diode circuit
- ★ Pre-assembled, pre-aligned RF Tuning heart
- ★ 4 stage I.F. amplifier
- ★ Own built-in power supply

Available for your convenience in separate parts and can be built for a Total price kit Model **TFM-IM (Mono)** £20.19.0 incl. P.T. Total price kit Model **TFM-IS (Stereo)** £24.18.0 incl. P.T.



Optional extra. Walnut veneered cabinet, **£2.5.0**

The CAR RADIO you have asked For, Model CR-1



Complete your motoring pleasure with this small compact high performance unit. Superb longwave and medium wave entertainment wherever you drive. For 12 v. positive or 12 v. negative earth systems.

- ★ 8 latest semi-conductors (6 transistors, 2 diodes)
- ★ Powerful output (4 watts) will drive two loudspeakers
- ★ Extremely low battery consumption
- ★ Pre-assembled and aligned tuning unit
- ★ Tastefully styled to harmonise with most car colour schemes

Supplied in two units, RF amp kit **£1.13.6**, incl. P.T. IF/AF amp. kit **£11.3.6**. **TOTAL PRICE KIT (excluding L.S.) £12.17.0**, incl. P.T. Quality 8in. x 5in. Loudspeaker **£1.16.1**, incl. P.T.

A Low-cost transistor stereo Amplifier 3 + 3 Watt output Model TS-23

Breaks the price barrier in transistor amplifier cost. Incorporates all the essential features for good quality reproduction from gram, radio and other sources.

- ★ 3 watts rms (15 ohms) per channel
- ★ Wide frequency response 15 c/s to 18 Kc/s —3 dB
- ★ New compact, professional slim-line styling
- ★ For free-standing or cabinet mounting

Price Amplifier **TS-23 (less Cab.) KIT £17.15.0**

Amplifier and Cabinet **KIT £18.19.0**



At last, good performance from a 'MINI' Speaker with the AVON compact speaker system.

Fully finished cabinet facilitates faster construction. This model offers substantial saving in price over models of a similar size and performance.



- ★ Mini size—only 7½in. w. x 13½in. h. x 8½in. deep
 - ★ For use with amplifiers with 8-16Ω output impedance
 - ★ Beautiful fully-finished wooden cabinet
 - ★ Two special loudspeakers, 6in. bass, 3in. HF unit
- In two separate parts, can be built for a total price, **KIT £13.16.0**, incl. P.T. Send for full leaflet.

Mail TODAY for your FREE Copy of the Heathkit catalogue ↓

Mail Order prices quoted. Retail prices 5% extra.

WELCOME TO OUR LONDON HEATHKIT CENTRE

233 Tottenham Court Rd., W.1.
Tel.: MUSEum 7349
Opening times:
Mon.-Sat. 9 a.m.—5.30 p.m.
Thurs. 11 a.m.—2.30 p.m.

To **DAYSTROM LTD.** Dept. **WW3**, Gloucester.

Tel. **Glo. 20217**

Please send me **FREE CATALOGUE** (Yes/No)

Please send me model(s).....

For which I enclose £ s d post paid.

NAME (Block Capitals)



ADDRESS

Please send **FREE** copy of Catalogue to my friend.

NAME

ADDRESS

WW3

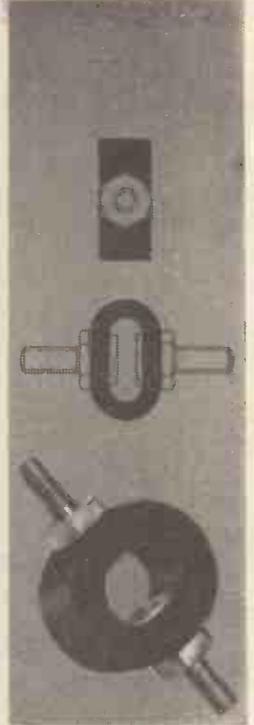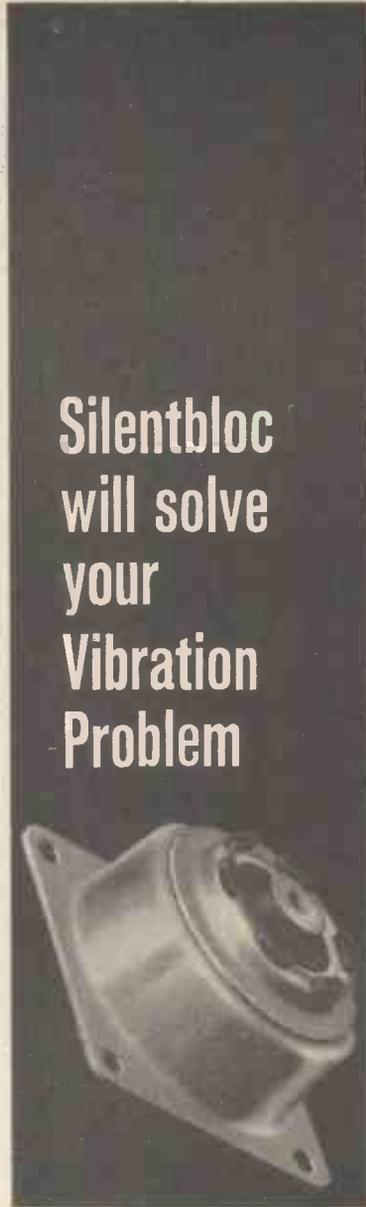

**Silentbloc
will solve
your
Vibration
Problem**

Take a Frustex instrument mounting . . . like the one featured on the left; or the bonded stud next to it. Perhaps the pedestal flange type in the centre and the ring stud mounting to its right command your interest? What do they all *mean*?

They, and the thousands of other components which SILENTBLOC design and manufacture, *mean* the end to most of those vibration troubles.

Combating vibration is SILENTBLOC'S business . . . but we're not dogmatic about it, low-frequencies constitute a special challenge. But, whatever your problem, give it to us — and you can be sure of one thing: if it can be solved we'll find the *correct* answer to it.

ANTI-VIBRATION DEVICES BY

SILENTBLOC

Andre Rubber Co, Ltd. is another Silentbloc Company

SILENTBLOC LTD • MANOR ROYAL • CRAWLEY • SUSSEX

Telephone: Crawley 27733

Telegrams: Silentbloc Crawley

Telex No. 87177

Silentbloc products are also manufactured by Silentbloc (Australia) Pty. Ltd., Melbourne

WW—009 FOR FURTHER DETAILS

Broadway 5/503

NOW!



miniature switches on a

SAME DAY SERVICE



GET SWITCHED ON!

**HIGH QUALITY
COMPETITIVE
PRICES
IMMEDIATE
DELIVERY**

Send now for our new catalogue supplement which contains full details of a wide range of miniature switches.



RADIO AND TELEVISION SERVICES LTD.

P.O. Box 11 · Gloucester Street · Cambridge

Ring Cambridge 51471—direct line for spares orders

Ring Cambridge 59101—other business

The STD prefix for Cambridge is OCA3

A MEMBER OF THE



GROUP OF COMPANIES

INCREASE THE SENSITIVITY OF YOUR OSCILLOSCOPE, VOLTMETER OR COUNTER



The TA401 is similar
to the TA601
as illustrated

TA605
ACTUAL
SIZE

SPECIFICATIONS	TYPE TA401	TYPE TA601	TYPE TA605
GAIN	40dB ± 0.1 dB	60dB ± 0.1 dB	20, 30, 40, 50 and 60dB ± 0.2 dB
BANDWIDTH ± 3 dB	1Hz-3MHz	3Hz-1.2MHz	20-40dB, 1Hz-3MHz; 50dB, 2Hz-2MHz; 60dB, 4Hz-1.5MHz
BANDWIDTH ± 0.3 dB	4Hz-1MHz	10Hz-300kHz	20-40dB, 4Hz-1MHz; 60dB, 10Hz-300kHz
INPUT IMPEDANCE	>5M Ω , <40pF from 100Hz to 1MHz	>1M Ω , <50pF from 100Hz to 300kHz	>5M Ω , <40pF from 100Hz to 300kHz
INPUT NOISE	<15 μ V, zero source <50 μ V, 100k Ω source	<15 μ V, zero source <40 μ V, 100k Ω source	As TA401 and TA601 at 40dB and 60dB
POWER SUPPLY	PP3 battery, life 100 hours		PP9 battery, life 1,000 hours, or A.C. Power Unit
AVAILABLE OUTPUT	1V up to 1MHz, 300mV at 3MHz, into load of 100k Ω & 50pF		1.5V up to 2MHz 1V at 3MHz, into 100k Ω and 50pF
OUTPUT IMPEDANCE	100 Ω in series with 6.4 μ F		
SIZE & WEIGHT	3in. \times 1 $\frac{1}{2}$ in. \times 1 $\frac{1}{2}$ in. 7 oz.		2 $\frac{1}{2}$ in. \times 4in. \times 5 $\frac{1}{2}$ in. 2 $\frac{1}{2}$ lbs.
PRICE with battery and input lead	£17 0 0	£17 0 0	£27 0 0 (Optional A.C. Power Unit £7, 10 0 Extra)

LEVELLE

PORTABLE INSTRUMENTS

Fully detailed leaflets are available on our complete range of portable instruments.

LEVELLE ELECTRONICS LTD.

PARK ROAD, HIGH BARNET, HERTS. Telephone: 01-449 5028

WW-011 FOR FURTHER DETAILS

A-Z (MINUS X)

ALPHABETICALLY...we can list the names GEOGRAPHICALLY...we can list the countries

All over the world students know that CREI HOME STUDY COURSES are supplying the answer to their need for advanced Technical Education in the field of Electronic Engineering Technology.

CREI PROGRAMMES ARE AVAILABLE IN:

- Electronic Engineering Technology
- Industrial Electronics for Automation
- Computer Systems Technology
- Nuclear Engineering
- Mathematics for Electronic Engineers
- Television Engineering
- Radar & Servo-Engineering
- City & Guilds of London Institute : Subject 49 and Supplementary Studies Subject No. 300

Write for free brochures to:

**C.R.E.I. (London) (Dept. W.W. 77)
WALPOLE HOUSE, 173/176 SLOANE STREET, LONDON, S.W.1
Telephone : Belgravia 8662**

INTERNATIONAL DIVISION OF CAPITOL RADIO ENGINEERING INSTITUTE WASHINGTON D.C.

WW-012 FOR FURTHER DETAILS

PLEASE SEND ME (FOR MY INFORMATION AND ENTIRELY WITHOUT OBLIGATION) FULL DETAILS OF THE EDUCATIONAL PROGRAMMES OFFERED BY YOUR INSTITUTE

NAME

ADDRESS.....

ELECTRONICS EXPERIENCE

.....

.....

C.R.E.I. (LONDON) (DEPT. WW 77)
WALPOLE HOUSE, 173/176 SLOANE STREET, S.W.1

SOUND SENSE

Broadcasting and recording studios throughout the world know that their efforts will be judged by millions of listeners and they take care that their own monitoring and listening rooms use the best equipment available. It is not surprising that the more discerning listeners use the same equipment in their own homes.



The new Listening and Demonstration Room of the BBC Transcription Service, fitted with QUAD 22 control unit, QUAD II power amplifiers and QUAD electrostatic loudspeakers.



for the closest approach to the original sound.

For full details of the QUAD range of units, send a postcard to:
Ref: WW. The Acoustical Manufacturing Co. Ltd. Huntingdon. Tel: Huntingdon 2561/2
WW-013 FOR FURTHER DETAILS



-the first name in mobile radio



PYE 'CAMBRIDGE' mobile radio

for dependable, reliability-tested, peak-performance, **always**

- All-transistor receiver - 100 mA battery drain
- G.P.O. approved; meets U.S., Canadian and European specifications
- Sealed I.F. block fitters
- A.M. or F.M. versions
- Dust and splash proof
- Option of 12½ kc/s, 20/25/30 kc/s or 40/50/60 kc/s channel spacing
- 1 to 8 channels available



Pye Telecommunications Limited, Cambridge, England.
 Telephone Cambridge 61222. Telex 81166

THE ANTEX RANGE

-an iron for every precision need!



F
40W. Models for 20 or 24V (mains models available shortly) $\frac{5}{16}$ " bit fitted—alternative bits available. 42/6d



ES
25W. Models for 12, 24, 110, 220 or 240V supply. $\frac{1}{8}$ " bit fitted—3 alternative bits available. 35/-



E
20W. Models for 24, 110, 220 or 240V supply. $\frac{1}{8}$ " bit fitted—8 alternative bits available. 35/-





G
18W. Models for 110, 220 or 240V supply. $\frac{3}{32}$ " bit fitted — 3 alternative bits available. 32/6d



CN
15W. Models for 24, 110, 200, 220 or 240V supply. $\frac{3}{32}$ " bit fitted — 17 alternative bits available. 32/6d

HOURS of work reduced to SECONDS with the new ANTEX DE-SOLDERING TOOL

Soldered joints can now be easily, speedily and neatly unsoldered. A self-cleaning nozzle, exclusive to the ANTEX de-soldering irons, sucks up molten solder into stainless-steel catcher. Operates by compressed air from airline or standard footpump. Type ESS for 240, 220, 110 or 24 volts. Type GSS for 240, 220 or 110 volts. Price complete with connecting tube, flexible lead and adaptors £4. 4. 0.

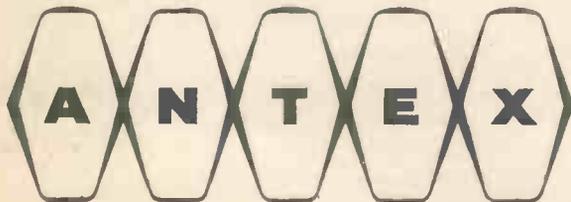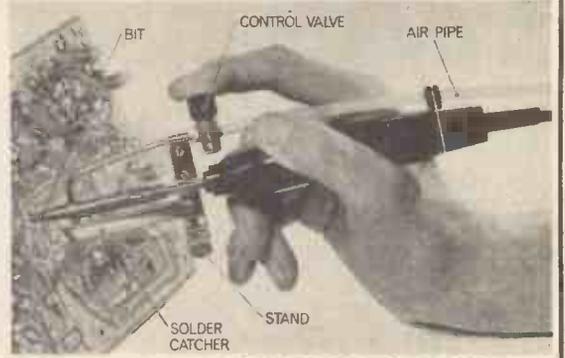


ANTEX LTD

Grosvenor House, Croydon,
Surrey, MUNICIPAL 2774

WW-015 FOR FURTHER DETAILS

Erie take a pride in performance

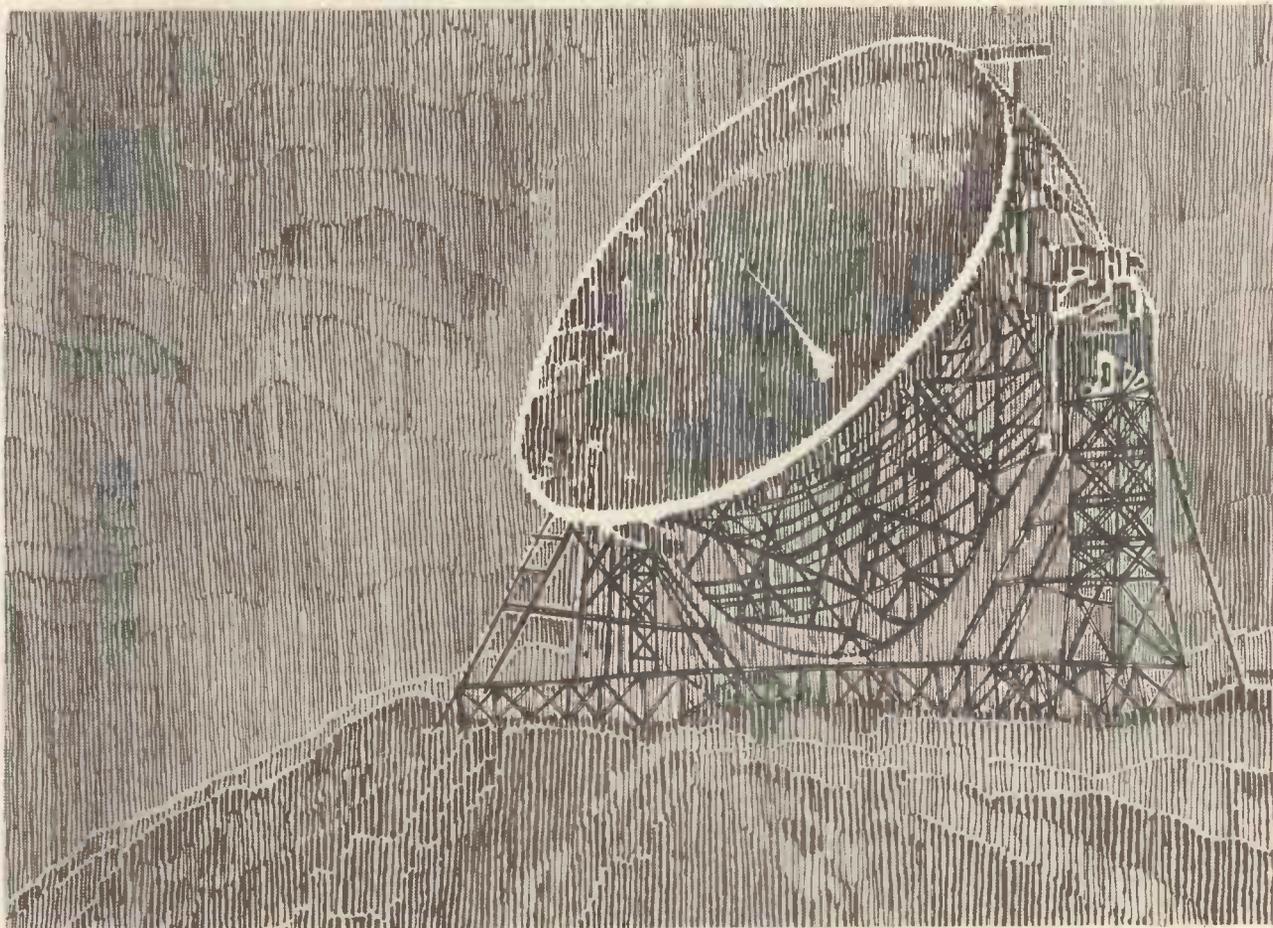

in defence

Erie's contribution to defence, radar circuitry etc., centres on the Weecon 8100 Series Plate Ceramicons, and the 8300 Series of silvered Chip Ceramicons.

The 8100 Series consists of seven sizes of insulated miniature plate capacitors in the wide range of ceramic materials associated with Erie manufacture, giving capacitance values from 2.5pf to 71,500pf. The rectangular bodies are completely insulated in a stable phenolic resin and range in size from 0.10" square to 0.60" square. Over the complete range is the choice of two working potentials, 100Vdc and 200Vdc at -55°C to $+85^{\circ}\text{C}$ (to $+125^{\circ}\text{C}$).
Erie, Weecon and Ceramicon are registered trade marks of Erie Resistor Limited

and $+150^{\circ}\text{C}$ with derating), and with capacitance tolerances down to $\pm 1\%$ and $\pm 2\%$ available, new areas of application for ceramic capacitors are opened.

The 8300 Series of silvered Chip Ceramicons meets the demands of hybrid integrated circuit production.

In defence, as in aerospace, communications, instrumentation as well as the whole range of modern electronics . . . Erie take a pride in performance

Write for details of Weecon Capacitors to:—

ERIE RESISTOR LIMITED,
Great Yarmouth, Norfolk, England.

Telephone: Great Yarmouth 4911 Cables:
Resistor Great Yarmouth. Telex: 97421.



A14

the Services
newest
highpower
manpack



LIGHTWEIGHT



COMPACT



PROVEN—
adaptable



BCC 30



"Against intense competition the BCC 30 has been selected to fill the A14 role for the British Services."

The A14—BCC 30 is the lightest, smallest, fully transistorised, one man high power HF transmitter-receiver station with an output of up to 30 watts.

Fully approved to British Ministry of Defence DEF 133 standards and to United States Mil. Std. 188B the A14—BCC 30 has already been selected by the British Services, Commonwealth, NATO and United States forces.

BCC
A MEMBER OF THE CONTROLS
AND COMMUNICATIONS GROUP

BRITISH COMMUNICATIONS CORPORATION LTD.
SOUTH WAY, EXHIBITION GROUNDS, WEMBLEY, MIDDLESEX
Telephone: WEMbley 1212 Cables: BEECEEECE Wembley

VALVES FOR: Radio and T.V. Retailers
 T.V. Rental Groups
 Trade Service
 Radio Relay Companies
 Audio Equipment
 Electronic Equipment
 Instrumentation
 Computer Manufacturers
 Aircraft, Marine and Radar
 Communications Equipment
 Public Corporations
 Civic Councils
 Educational Authorities
 Hospitals and Medical Schools
 Research and Development
 Government Departments
**AIR REGISTRATION BOARD AND
 MINISTRY OF AVIATION
 APPROVED**

**ALWAYS
 PHONE**

**Pinnacle
 FIRST**



01-692 7714

A NEW DIRECT LINE
 ROUTED STRAIGHT TO
 OUR INDUSTRIAL
 ORDER DEPARTMENT

Pinnacle

PINNACLE ELECTRONICS LTD

ACHILLES STREET • NEW CROSS • LONDON S.E.14

Tel: Tideway 7285

WW-018 FOR FURTHER DETAILS.


THIS IS IT!



system 20 by Wharfedale


System 20 is the brilliant new High Fidelity system by Wharfedale the system by which all others will be judged.

For the first time ever Wharfedale—makers of the world's finest loudspeakers—offer a complete High



Fidelity system. This is built to extremely high perform-

ance standards that will satisfy the most critical professional but it is simplicity itself to operate:



SYSTEM 20 comprises:

Wharfedale WHF-20 transistorized stereo amplifier (20 watts per channel).

Wharfedale WFM-1 High Fidelity transistorized stereo tuner and two alternative transcription turntables—the WTT1 and WTT2 con-

taining the THORENS TD 124 and the GARRARD LAB80 respectively.

There is a choice of two housings—the elegant Howard console and the modern as tomorrow Selby lowboy.



Alternatively Matched Units are available as illustrated.



For 24 page colour folder giving full details and specifications of this exciting new High Fidelity development complete the coupon now.

NAME

ADDRESS

TOWN

COUNTY

W.3

RANK WHARFEDALE LTD IDLE BRADFORD YORKSHIRE Tel. Bradford 612552/3 Grams Wharfedale Bradford

WW-019 FOR FURTHER DETAILS

Wireless World

ENQUIRY SERVICE FOR PROFESSIONAL READERS

To obtain further details of any of the coded items mentioned in the Editorial or Advertisement pages of this issue, please complete one or more of the attached cards entering the reference number(s). Your enquiries will be passed on to the manufacturers concerned and you can expect to hear from them direct, in due course. Cards posted from abroad require a stamp. These Service Cards are valid for six months from date of publication.

PLEASE USE CAPITAL LETTERS

Pour obtenir tout autre renseignement sur tout article mentionné dans l'Editorial ou dans les pages publicitaires de ce numéro nous vous prions de remplir une ou plusieurs des cartes ci-jointes en inscrivant le numéro ou les numéros de référence. Vos demandes de renseignement seront transmises aux fabricants intéressés qui, entemps voulu, vous feront parvenir une réponse. Il est nécessaire d'affranchir les cartes postées l'étranger. Ces cartes de service sont valides pendant six mois à partir de la date de publication.

PRIERE D'UTILISER DES CARACTERES D'IMPRIMERIE

Weitere Einzelheiten über irgendwelche Artikel, die auf redaktionellen oder Anzeigenseiten erschienen erhalten Sie, indem Sie eine oder mehrere der beigefügten Karten ausfüllen und die Kennnummer(n) angeben. Ihre Anfrage wird an den Hersteller weitergeleitet, und Sie werden dann direkt von ihm hören. Karten, die im Ausland aufgegeben werden, müssen frankiert werden. Diese Service-Karten sind sechs Monate vom Ausgabetag gültig.

BITTE IN BLOCKSCHRIFT AUSFÜLLEN

Per ulteriori particolari in merito agli articoli menzionati nel testo o nelle pagine pubblicitarie di questo numero. Vi preghiamo di completare una o più delle schede allegate citando il numero o i numeri di riferimento. La Vostra richiesta sarà inoltrata ai fabbricanti interessati che Vi risponderanno direttamente. Le schede dall'estero devono essere regolarmente affrancate. Questo scontrino di servizio è valido per sei mesi dalla data di pubblicazione.

SI PREGA DI COMPILARE LE SCHEDE STAMPATELLO

Con objeto de obtener más detalles de cualquiera de los artículos mencionados en las páginas editoriales o de anuncios de este número sírvase rellenar una o más de las unidas tarjetas citando el número o números de referencia. Sus consultas serán transmitidas a los fabricantes interesados de quienes tendrán noticias directamente a su debido tiempo. Las tarjetas enviadas desde el extranjero requieren franqueo. Estas tarjetas de servicio son válidas durante 6 meses a partir de la fecha de publicación.

SÍRVASE ESCRIBIR CON LETRAS MAYUSCULAS

10-12 Watts - 5 kVA

DRAKE TRANSFORMERS

INCORPORATING

R. F. GILSON LTD.

Mains Transformers

Chokes

Audio Output Transformers

Audio Input Transformers

Saturable Reactors

Coils


Current Transformers

Transistor Transformers

Inverter Transformers

Screened Microphone Transformers

Wide Band R.F. Transformers

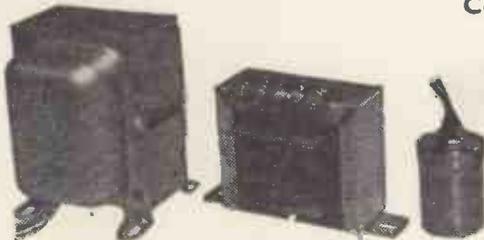


DRAKE TRANSFORMERS LTD., BILLERICAY, ESSEX

Billericay 1155

WW-020 FOR FURTHER DETAILS

Integrity in instrumentation

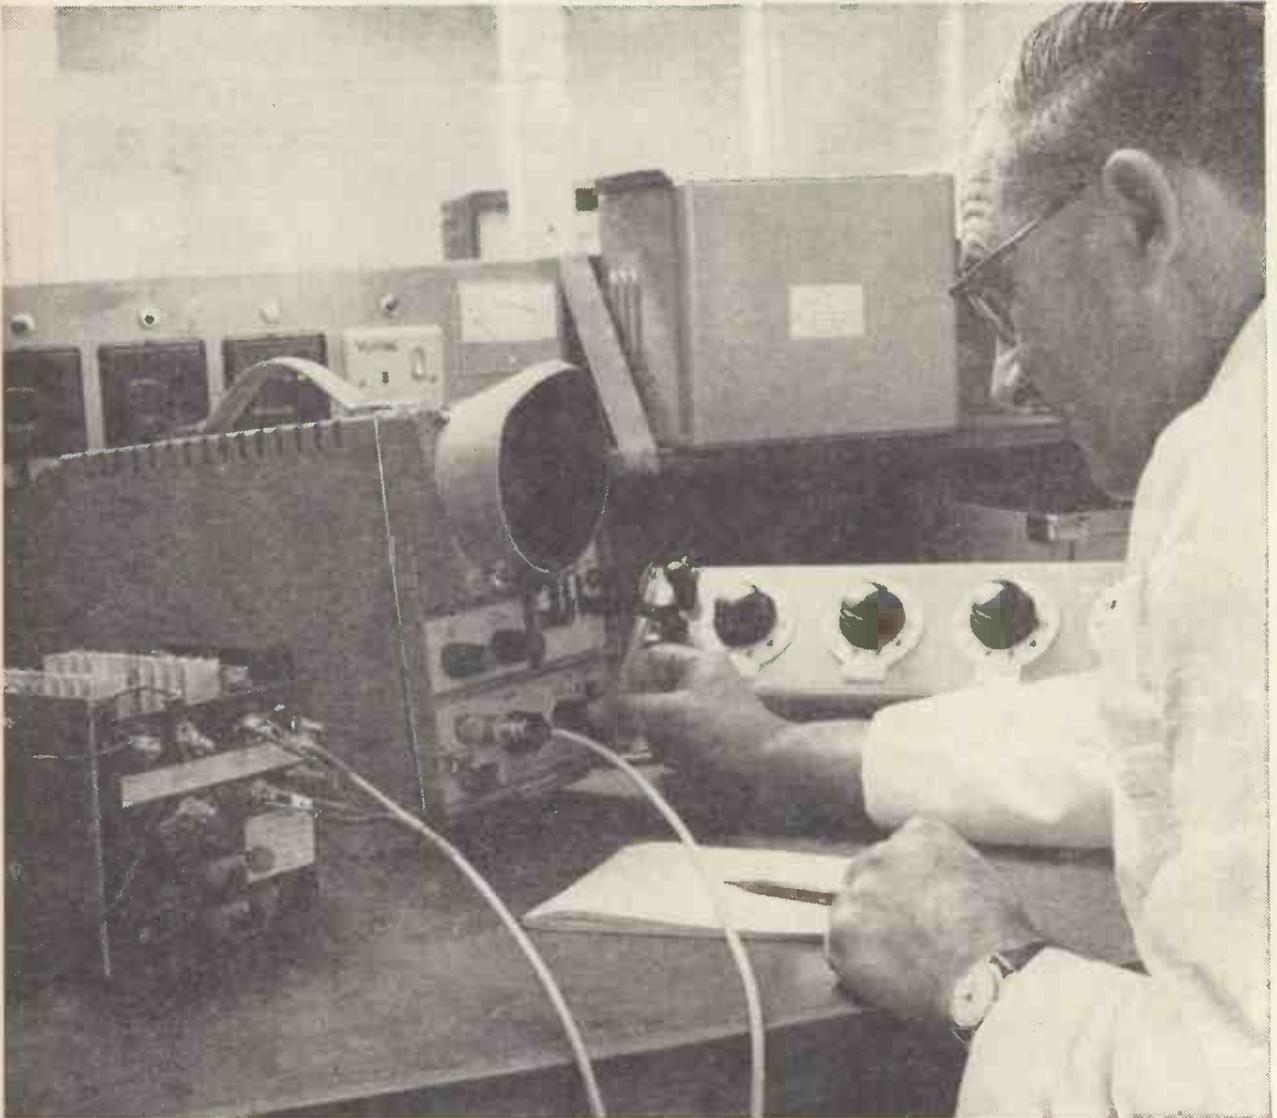

INVESTING IN THE FUTURE

Constant research and development is essential to the continuing success of *any* company. Nowhere is it more important than in instrument manufacture, where the increasing sophistication of new equipment demands ever higher standards of accuracy, reliability and quality.

At Sifam, great emphasis is placed on this "investment in the future". Dynamic market research by the company's own specialists is fed into a research and design laboratory ideally equipped and staffed by men dedicated to the Sifam creed of cautionary thoroughness in design. To this research is added the vital ingredient of vision.

The results – it could be anything from a complete new range to a modified scale, or even a redesigned case – are exhaustively tested. In addition, at each stage from conception to production, planned consultations take place between all departments to ensure that what is eventually offered to the customer is up to the highest standard – never, never, 'down to a price'.



SIFAM ELECTRICAL INSTRUMENT COMPANY LIMITED
 WOODLAND ROAD TORQUAY DEVON ENGLAND
 Telephone: TORQUAY 63822 Telegrams: SIFAM TORQUAY

TIMERS

MICRO SWITCHES IMMEDIATE DESPATCH



S5G

- ★ 1 MILLION OPS.
- ★ 5 amp. c/o Sub-miniature Micro-switch.

2/5 each
per 1,000



VAQ

- ★ 10 amp. c/o PUSH BUTTON.
- ★ Panel mounting.
- ★ Buttons in six colours.

5/4 each
per 500.



G-5

- ★ LOW TORQUE PRECISION ROTARY SWITCH.

- ★ 5 amp. c/o.
- ★ 1/2 million operations.

6/3 each
per 1,000.



VV-15-1A

- ★ 15/10 amps. c/o.
- ★ 100,000 ops.

1/8 each
per 1,000.
Single Throw 1/6 each

LIMIT SWITCH WL 10 FGA2



- ★ 10 amp. 2 circuit
- ★ CASED FOR USE UNDER ARDUOUS CONDITIONS.
- ★ MECHANICAL HANDLING, MACHINE TOOLS, LIFT GEAR.

ROLLER LEVER AS ILLUS.
As low as 45/5 each



V-10-1B

- ★ 1 MILLION OPERATIONS.
- ★ 10 amp. c/o.

- ★ COMPARE OUR SPEC. & OUR PRICES WITH OTHER SIMILAR TYPES.

Screw Terms 2/2 each per 1,000
V-10-1A Solder Tags 1/11 each per 1,000



VV-5GW-1A44

- ★ LIGHT FORCE
- ★ 4 gms. Wire actuator.
- ★ Designed for coin-operated mechanisms.

4/1 each per 1,000

U.L. APPROVED (Appr. No. 32667)

ALWAYS AVAILABLE FROM STOCK

U.S. MIL. SPEC.

PROCESS TIMERS

611 T Delay Relay



- ★ 2, 5, 15, & 25 secs. Delay
- ★ 15 amp. c/o micro-switch fitted.
- ★ LARGE RANGE OF A.C. & D.C. OPERATIONS

approx. 40/- each,
dependent on quantity.

SYT MINI-TIMER



- AUTOMATIC RE-SET
- ★ DIAL RANGES 10 secs. to 6 hours.
- ★ Mains operation.
- ★ 5 AMPS.
- ★ DOUBLE POLE, DOUBLE THROW SWITCHING INCORPORATED.
- ★ Accuracy 1/2%.

From £9.5.6 each.

STP Sub-Mini Process Timer



- Automatic Re-set
- ★ Plug-in Octal base.
- ★ Mains operation.
- ★ Built-in 2 amp. c/o switching.
- ★ 10 secs. to 1/2 hour.

From £5.3.6 each.



AT-10

PNEUMATIC TIMER - delay relay

- ★ Fully adjustable up to 200 seconds. Fitted with 15 amp. S.P.D.T. switch.
- ★ One model provides delay after energise or delay after de-energise.

App. £6.0.0 dependent on quantity.

PROXIMITY SWITCH—TL 2 GNA



- ★ FOR BATCHING, CONVEYORS, MACHINE TOOL CONTROL, PACKAGING, SORTING, etc.
- ★ SENSES FERROUS AND NON-FERROUS OBJECTS.
- ★ NEEDS NO MECHANICAL FORCE OR PRESSURE TO OPERATE.
- ★ SOLID STATE SENSING HEAD, plus Power Pack.

From £6.14.5 each.

Latest development: Proximity head: Requiring NO POWER PACK: app. £11.0.0

NORTHERN STOCKISTS AND DISTRIBUTORS: GORDON WILSON (AUTOMATION) LTD. BLACKBURN 59921
SOUTHERN STOCKISTS AND DISTRIBUTORS: EDMUNDSONS ELECTRONICS LTD. NEW CROSS 9731
MIDLAND STOCKISTS AND DISTRIBUTORS: B.P.G. ELECTRO-MECHANICAL SUPPLY CO. LEICESTER 61460

(Dept. W.W.11) **OMRON** PRECISION CONTROLS

313 Edgware Road, London, W.2

Tel.: Paddington 2370

SME*The best pick-up arm in the world*

Only S.M.E. Precision Pick-up Arms offer all these features · Choice of arm length Model 3009 (9in.) or Model 3012 (12in.) for still lower tracking error—of special importance with elliptical styli · Low inertia · High precision ball races and knife-edge bearings for minimum pivot friction · Linear offset chosen for lowest distortion · Automatic slow-descent with hydraulic control · Bias adjuster calibrated for tracking force · Exact overhang adjustment with alignment protractor · Precise tracking force from $\frac{1}{4}$ -5 grams applied without a gauge · Shielded output socket · Low capacity 4ft. connecting cable with quality plugs · Light-weight shell · Camera finish in satin chrome, gun-black and anodised alloy · Comprehensive instructions · Rational development—all improvements can be incorporated in any existing Series II arm.

For sales and service ring Steyning 2228.

S.M.E. LIMITED · STEYNING · SUSSEX · ENGLAND
 WW—023 FOR FURTHER DETAILS

VACUUM COATING UNITS



All purpose 6" & 12" Units

- ★ 1", 2", 3" or 4" Vacuum Systems
- ★ Fully fitted workchamber
- ★ 10^{-4} torr in 4 minutes with 4" system
- ★ 12v. 40A. LT Evaporation supply
- ★ 3000v. 100mV. Ion clean up supply



Accessories include Carbon Coating and Sputtering Equipment, Rotary Drives and 6-source Turret.

Complete Microcircuit and Thin Film Production Equipment is also available.

Full details on request.

GENEVAC LTD., *Subsidiary of General Engineering Co. (Radcliffe) Ltd.*

PIONEER MILL · RADCLIFFE · MANCHESTER
 Tel.: Radcliffe 3041-5

Branch Offices:

LONDON	MIDLAND	SCOTTISH	MANCHESTER	LIVERPOOL
Tel.: (STD 01) 643 4541-4	Tel.: SHIRLEY 4508	Tel.: CALEDONIAN 5597	Tel.: BLACKFRIARS 0185	Tel.: CENTRAL 9532-3

WW—024. FOR FURTHER DETAILS



FERRANTI

T.R. CELLS SPAN THE WORLD

Leading Radar Manufacturers use Ferranti T.R. Cells in Airborne, Ground and Marine Radar Systems. A comprehensive range of T.R. Cells is available covering frequencies from 2,700 MHz to 35,000 MHz. Write for further information to:

FERRANTI

First into the Future

FERRANTI LTD · KINGS CROSS ROAD
DUNDEE · Tel: (ODU2) DUNDEE 89311

THE AMPLIFIER FOR CERAMIC PICKUPS



222 STEREO AMPLIFIER

There are a number of ceramic pickups capable of giving excellent results with a good amplifier.

Our 222 was expressly designed for these pickups. It has all the facilities you look for in a high fidelity amplifier and a choice of matching FM and AM-FM tuners.

For those who wish to use a magnetic pickup there is the 221 amplifier, which has other additional facilities.

221 STEREO AMPLIFIER	£35 10 0
222 STEREO AMPLIFIER	£28 15 0
223 AM-FM TUNER	£31 9 0
224 FM TUNER	£25 2 3
OPTIONAL CASE, teak and vinyl hide as illustrated. All models	£3 10 0
M5 STEREO RADIO DECODER	£14 10 0

For full details and technical specifications of all models, plus list of stockists, post coupon or write mentioning 3WW67.

ARMSTRONG AUDIO LIMITED
NARLTERS ROAD, LONDON, N.7
Telephone: NORTH 3213



AUDIO FAIR. ENQUIRY ROOM 539
BOOTH 45 DEMONSTRATION ROOM 538

name

address

3WW67

WW-026 FOR FURTHER DETAILS



*sound mixers with details
to your specification....*

Elcom complete mixing equipment is designed around the well known Elcom Electronic Fader which provides a noise free stepless fade.

A wide range of equipment is available from the transportable four channel Mono/Stereo battery/mains units to large multi-channel studio consoles.

Standard equipment can be provided at low cost with an unlimited combination of facilities to customers specification, and we are pleased to discuss specific requirements and submit quotations.




ELCOM

For full details write or phone:
ELCOM (NORTHAMPTON) LTD.
WEEDON ROAD INDUSTRIAL ESTATE
NORTHAMPTON. Tel. Northampton 51873

A member of the Painton group of Companies

WW-027 FOR FURTHER DETAILS

Thorn sub-miniature lamps and lampholders

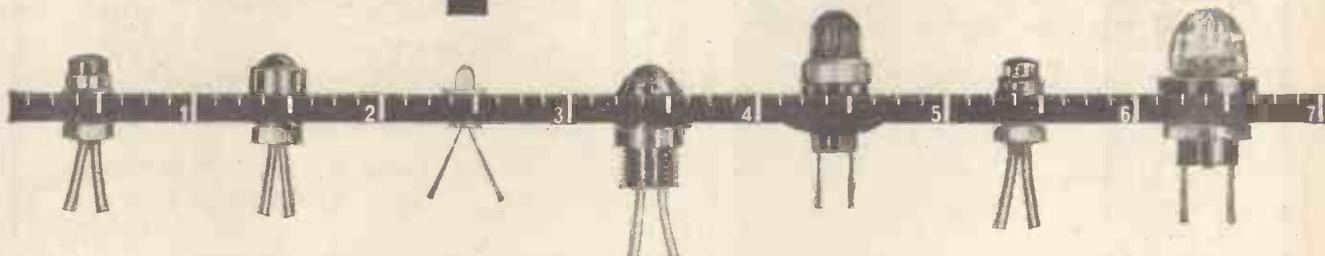

have the measure of today's panel and instrument lighting problems

The lamps have an operational life of 60,000 hours when operated at 5 volts, or 5,000 hours at 6 volts, with a light output of .35 lumens at .06 amps and .75 lumens at .07 amps respectively.

They have been vibration tested to BS.2G.100 grade B and meet the requirements of E.I.D. release and other similar specifications. Two types are available: L.1122—a wire ended lamp with $\frac{1}{2}$ " leads, NATO Stock No: 6240-99-995-1189; and L.1123—capped version, NATO Stock No: 6240-99-995-1198.

Lampholders, as illustrated (left to right)

Sub-miniature Indicator Light type 0951.

Sub-miniature Indicator Light type 0978.

Sub-miniature Light type 0976.

Midget Indicator Light type 0977—related in size but uses a 28 volt .04 ampere lamp with a light output of 3.75 lumens and an operational life of some 25,000 hours.

Sub-miniature Lampholder type 2348.

Sub-miniature Indicator Light type 1081.


Sealed Sub-miniature Lampholder type 0430.

Please write for full details to:



Thorn Special Products Ltd

Great Cambridge Road, Enfield, Middx. HOWard 2477
A member of the Thorn Electrical Industries Ltd. group of companies

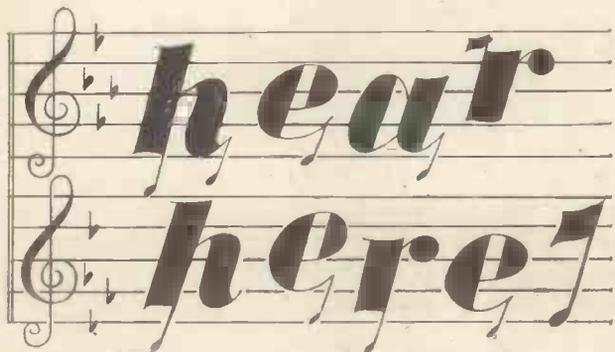

the world's
finest sound
equipment at the

INTERNATIONAL

audio

Festival & Fair

March 30-31st April 1st-2nd

11 a.m. — 9 p.m.

... held over the weekend in the heart of London's West End, this is acknowledged to be the finest Exhibition of its kind in the WORLD

Famous international manufacturers give demonstrations all day long of microphones, Pick-ups, stylii, turn-tables, amplifiers, speakers, tapes, tape recorders and many many accessories.

Musicians, technicians, professionals, amateurs—all will find something new to interest them.

★ Here hear the best Sounds in the world.

to obtain
complimentary tickets:


Just ask at your nearest
Audio, Record, Radio
or Music Shop, or
write direct
(enclosing
stamped and
addressed
envelope) to:

AUDIO HOUSE,
42 MANCHESTER ST.
LONDON W.1.

HOTEL RUSSELL
Russell Square,
London W.C.1.

WW-029 FOR FURTHER DETAILS

**Kolectric
present
their**

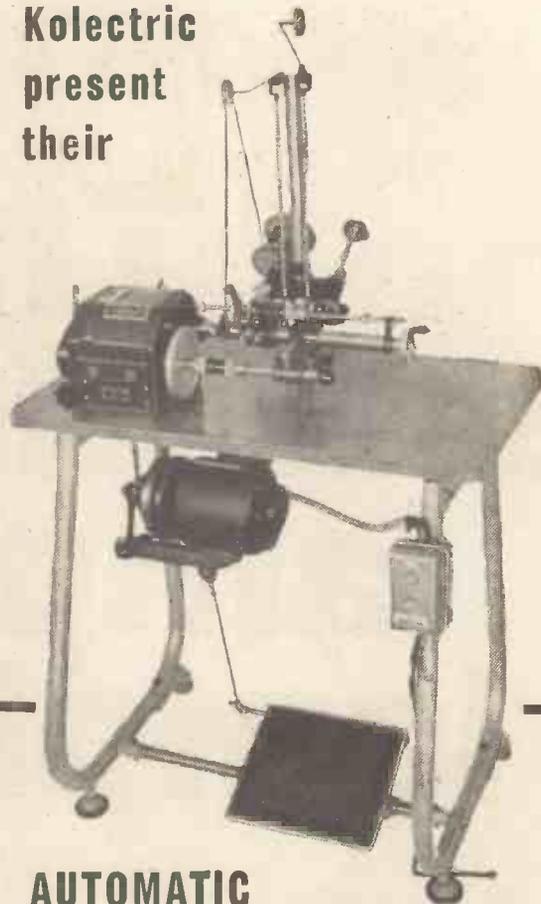

**AUTOMATIC
COIL WINDING MACHINE**

*Type A1/1 (25-50 S.W.G.)
Type A1/X (19-46 S.W.G.)*

incorporating ALL these refinements:

- ★ Provision for simultaneous winding of several coils
Micrometer traverse setting
- ★ Wire gauge Indicator with various settings to which machine can quickly be adjusted without changing any gears
- ★ Instantaneous re-set turns counter reading up to 100,000 turns; predetermined version available
- ★ Efficient wire tensioning stand supporting one or more reels of wire
- ★ Cadmium- or chromium-plated steel parts

A fully illustrated leaflet quoting complete technical specifications is available. We will be pleased to send it to you on request.


KOLECTRIC LTD

HAYES ROAD, SOUTHALL
MIDDLESEX
Tel.: SOUTHALL 6002/3

WW-030 FOR FURTHER DETAILS

DESIGNED FOR TODAY

TWO NEW MICROPHONES FROM AMPLIVOX

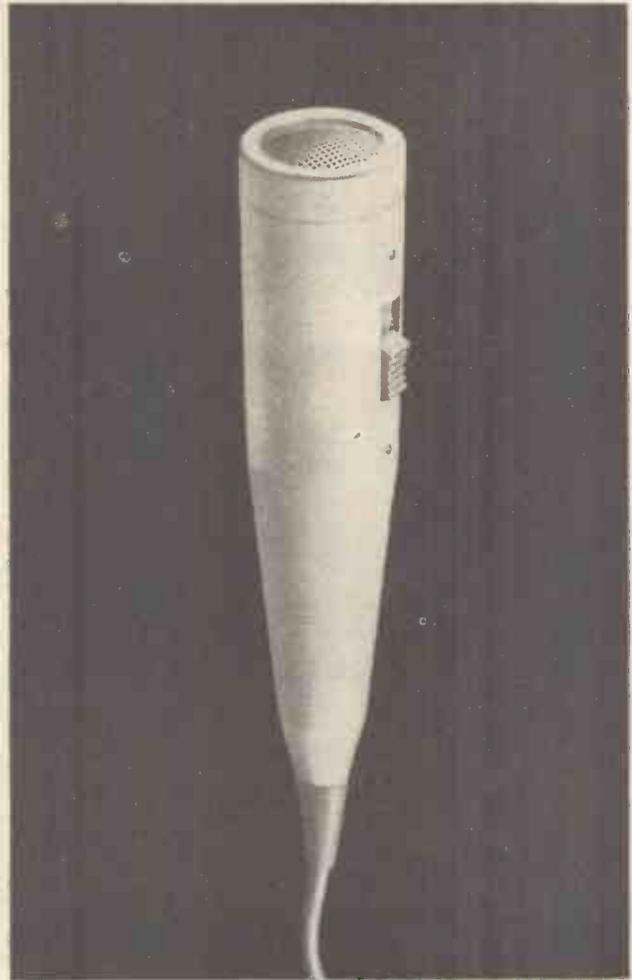

THE NEW TELEMIKE— hand microphone for 2-way operation

- Transmits or receives on a single transducer
- High power performance
- Excellent speech quality
- Modern styling and attractive colour scheme
- Reliable switching

THE NEW ELITE— high fidelity moving coil microphone

- High fidelity reproduction
- Full frequency coverage
- Rugged robust construction
- Modern appearance
- Available with single pole and double pole changeover switches

AMPLIVOX

MAKE SOUND SENSE

Ideal for use with dictating machines; telephone answering systems; tape recorders; conferences; radio telephones and pocket sets.


AMPLIVOX LIMITED, INDUSTRIAL DIVISION

Beresford Avenue, Wembley, Middx. • Phone: WEMbley 8991 • Grams and cables: Amplivox Wembley


WW-031 FOR FURTHER DETAILS

Bullers CERAMICS


for the **ELECTRONIC INDUSTRY**
(and Electrical Appliance Manufacture)

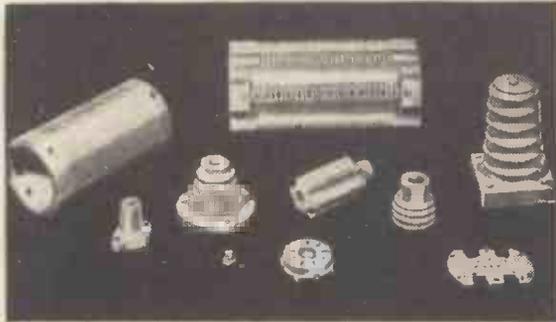

Frequelex—for high-frequency insulation.

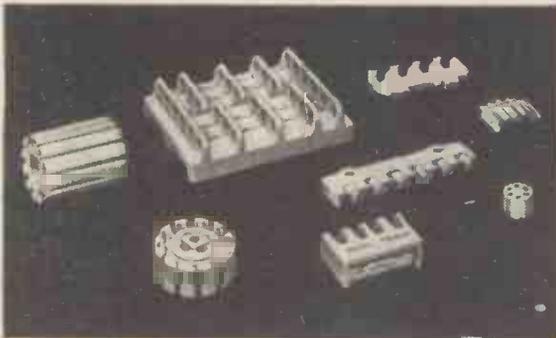

Refractories for high-temperature insulation.

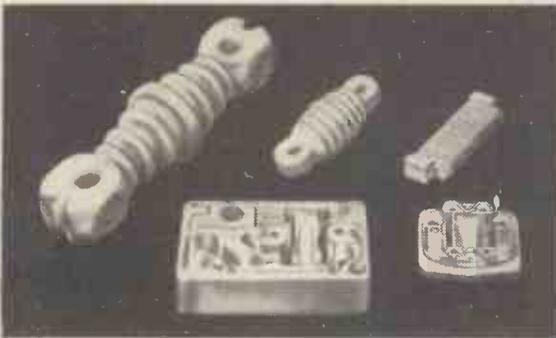

Bullers porcelain for general insulation purposes.

Meticulous care in manufacture, high quality material, with particular attention applied to *dimensional precision and accuracy*, explain the efficiency and ease of assembly when using Bullers die pressed products. *Write today for detailed particulars.*

BULLERS LIMITED


Milton, Stoke-on-Trent, Staffs.

Phone: Stoke-on-Trent 54321 (5 lines)

Telegrams & Cables: Bullers, Stoke-on-Trent
London Office: 6 Laurence Pountney Hill, E.C.4
Phone: MANsion House 9971

WW—032 FOR FURTHER DETAILS

FRAHM vibrating reed FREQUENCY METERS

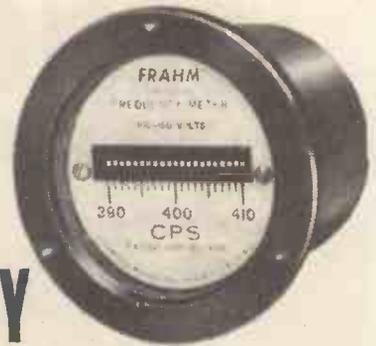

are widely used as standards in many industries because:—

- 1) They are accurate (to $\pm 0.3\%$ or $\pm 0.1\%$ as specified)
- 2) They are not voltage or temperature sensitive, within wide limits
- 3) They are unaffected by waveform errors, load, power factor or phase shift
- 4) They will operate on A.C., pulsating or interrupted D.C., and super-imposed circuits
- 5) They need only low input power
- 6) They are compact and self-contained
- 7) They are rugged and dependable

FRAHM Vibrating Reed Frequency Meters are available in miniature, switchboard and portable forms, in ranges from 10 to 1700 cps. Descriptive literature on these meters, and on FRAHM Resonant Reed Tachometers, freely available from the sole U.K. distributors:—

ANDERS METER SERVICE

ANDERS ELECTRONICS LTD. 103 HAMPSTEAD ROAD LONDON NW1
TELEPHONE EUSTON 1639 *MINISTRY OF AVIATION APPROVED*
WW—033 FOR FURTHER DETAILS

VARIABLE D.C. POWER UNIT WITH ACCUMULATOR PERFORMANCE FROM A.C. MAINS

EFFECTIVE
RESISTANCE
LESS THAN
·1 ohm.



TYPE
250VRU/30/20
250VRU/60/10
PRICE
£131-5-0

FEATURES

0-30 VOLTS Variable up to 20 AMPS.
0-60 VOLTS Variable up to 10 AMPS also available.
RIPPLE CONTENT negligible, IMPEDANCE and REGULATION equivalent to accumulator performance. SILICON RECTIFIERS. Inadvertent "SHORT" protection. OVERLOAD CAPACITY 200% for short periods.

APPLICATIONS

Operating and Servicing transistorised equipment. 12 v. Mobile radio/tel. operation, D.C. Motors, relays, industrial power, etc. from any point of A.C. **WITHOUT THE USE OF ACCUMULATORS.**

12 v. or 24 v. FIXED OUTPUTS up to 24 Amps. also available. **AVOID THE EXTRA EXPENSE OF SUPER REGULATION YOU MAY NEVER NEED.** Prices £14/16/- to £131/5/-.

See us at the
1967 R.E.C. Show
23-26th May

Valradio
LIMITED
BROWELLS LANE,
FELTHAM, MIDDX.
ENGLAND

Please write to department C 3b.
for current literature.

Tel.: FEL 4837-4242

VALRADIO and STEREOSONOSCOPE are the registered trade marks of VALRADIO LTD.

WW—034 FOR FURTHER DETAILS

THIS IS THE DIGITAL VOLTMETER YOU HAVE BEEN WAITING FOR!



- Isolated input
- 1mV—1000V d.c. in four ranges
- Response time 0.1 second
- Accuracy 0.1%
- Calibration using integral standard cell

- Polarity indication
- Switched a.c. filter
- Only two controls
- All solid-state
- Compact, lightweight

The Bradley Digital Voltmeter Type 160 is a compact, high performance instrument, having an accuracy of 0.1% of reading. It has been designed to ensure high reliability and ease of operation. The input is fully floating.

High reliability. Fully electronic operation without any mechanical moving parts and the exclusive use of silicon planar transistors ensure high reliability. The circuit boards are fitted with gold plated plug-in contacts and the use of three dimensional construction gives excellent mechanical stability.

Ease of operation. Only two switches cover all functions—ranging and polarity, including filter. Polarity is indicated by a neon indicator tube.

The inherent high degree of stability makes frequent checking of calibration and zero-setting unnecessary. A fifth position of the range switch selects an internal standard cell for checking and calibration of the instrument. A filter can be switched into the input circuit to suppress any superimposed noise or a.c. on the input signal.

Ease of reading. Neon indicator tubes with high light intensity ensure ease of reading even in conditions of bright ambient light. The decimal point is positioned automatically by the range switch. Small size and light weight makes possible the placing of the Digital Voltmeter in the most convenient position for the user.

SEE YOUR ELECTRONIC INDEX LIBRARY FOR FULL TECHNICAL DATA

Price: **£240**

Automatic Polarity is available on the Type 160A. Price £280 complete.



**G. & E. BRADLEY
LIMITED**

Electral House, Neasden Lane, London, N.W.10. Telephone: DOLlis Hill 7811. Telex. 25583

Pat. 110 mono-bloc connectors with closed entry contacts

FULLY APPROVED TO DEF 5325-5 STANDARD FOR
9, 15, 25, 37 AND 50 WAY CONNECTORS.




These connectors consist of one-piece Diallyl Phthalate moulding with hard gold plated plug pins, socket contacts, and beryllium copper contact clips. Closed entry contact design eliminates the risk of damage to the sockets by test probes. The shells are of passivated cadmium plated steel and the covers and cable clamps are of die-cast aluminium Grade LM6.

ELECTRICAL RATINGS Working voltage: 750 volts DC
Current capacity: 5 amps max per contact

CARR FASTENER CO LTD

Stapleford, Nottingham Telephone: Sandiacre 2661
Sales Offices: Wembley, Sale



WW-036 FOR FURTHER DETAILS

time's on your side with MINITIME



High accuracy, wide range, low cost. These are among the many advantages of MINITIME. Comprising a pocket size black moulded case with contrasting front panel and 3in. meter. MINITIME is designed to measure the time interval between the opening and/or closing of contacts, or width of pulses in active circuits. Range: 1 millisecond-10 secs.

Send for explanatory leaflet to our Agents: Hird-Brown Ltd., Bolton, Bolton 27311; Sencom Ltd., London, Hampstead 1103; Jiveco Paris; S.P. R.L. Pol Francois, Belgium; or direct to A. G. BROWN ELECTRONICS LTD., LOWER MILLS, BUSBY, GLASGOW, SCOTLAND.

WW-037 FOR FURTHER DETAILS

RECORD HOUSING



Does your hi-fi cause disharmony in the home? Does it clutter up the room? Does it irritate your wife? Why not bring harmony into the home with Record Housing? Our Britten Equipment Cabinet (£26.19.0) with matching Hi-Flex 10/12 Loudspeaker Enclosure (£12.19.0) will blend harmoniously into any setting.

Whatever your set up there's a Record Housing Cabinet to meet your needs. Amplifiers, tuners, turntables, loudspeakers, records, tapes, tape decks—and even a complete tape recorder—you name it—we'll house it! Send for fully illustrated catalogue giving details of over 20 different cabinets and U.K. stockists' list.

FREE HI-FI HOUSING ADVISORY SERVICE
RECORD HOUSING (Dept. WW3)
Brook Rd., London, N.22. Tel: BOWes Park 7487

WW-038 FOR FURTHER DETAILS


MODEL 1076 TELEVISION ANALYST

Checks every stage of black & white or color television receivers.

This one instrument does the work of several pieces of test equipment and saves hours of time. Generates standard test pattern plus white dot, white line crosshatch, and color bar patterns.

Model 1076 for NTSC standards. Nine VHF RF channels, 20-45 mHz I.F. 105-125 volts, 60 cycles. (Also available in 50 cycles).

Model 1076-ES for West Europe CCIR standards. Channels E2, E2A, E3, E4, E4A, E5, E6, E9, E10. 625 lines, 50 fields, 15,625 Hz horizontal frequency, 5.5 mHz FM audio I.F. 115/230 volts, 50 cycles.

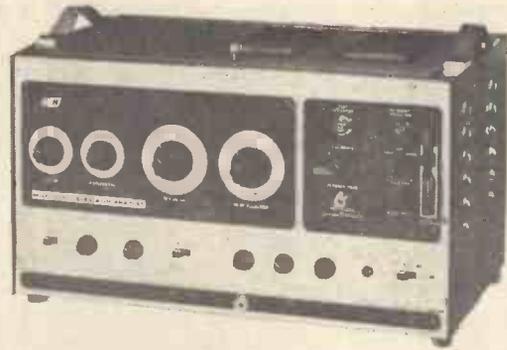

NEW!

MODEL 970 TRANSISTOR EQUIPMENT ANALYST

For every transistor-type FM or AM radio, and for all transistorized TV and audio amplifiers.

Famous B&K "In-Circuit technique injects AC or DC test signals at every important test point without unsoldering any components. Simplifies and speeds diagnosis. Covers 250 kHz-2000 kHz (AM); 10 mHz-11.4 mHz (AM or FM); 88 mHz-108 mHz (FM). Available for 105-125 volts, 60 cycles; or 115-230 volts, 50/60 cycles.

MODEL 465 CRT REJUVENATOR and CHECKER

Tests and repairs color and black & white picture tubes.

Checks for leakage, shorts, open circuits and emission. Removes inter-element shorts and leakage, repairs open circuits, restores emission and brightness. Predicts remaining useful life of picture tube. 115 volts, 60 cycles. In portable carrying case. Also available in 230 volts.

MODEL 120 VOLT-OHM-MILLIAMMETER

Featuring burn-out proof meter movement.

61 ranges which start lower and go higher than other instruments of its size and type. Extremely sensitive to make transistor servicing easier. Convenient polarity reversal switch. Supplied complete with batteries, test leads and technical manual.

Model TV-2C High Voltage Probe extends DC voltage range of Model 120 up to 30,000 volts.

Now Available

FAMOUS B&K QUALITY EQUIPMENT FOR RADIO, TV AND ELECTRONIC TECHNICIANS

COBRA V ALL SILICON SOLID STATE MOBILE TRANSCEIVER

5 crystal controlled CB channels, 29,965 mHz to 27,255 mHz.

Outstanding selectivity sensitivity and ability to push through interference — at a low cost. Features 3.5 watt output with 100% modulation, Dyna-Boost speech compression, automatic noise limiting, microphone. Handsome self-contained cabinet with walnut grain panel, installs easily in car or truck. 12-volt DC operating voltage. AC power supply available.

Write for **FREE** Catalog with Complete Specifications and Prices


EMPIRE EXPORTERS INC.

123 Grand Street
New York, N.Y. 10013

1967

April 29—May 7

Electrical Engineering
at the
Hanover Fair

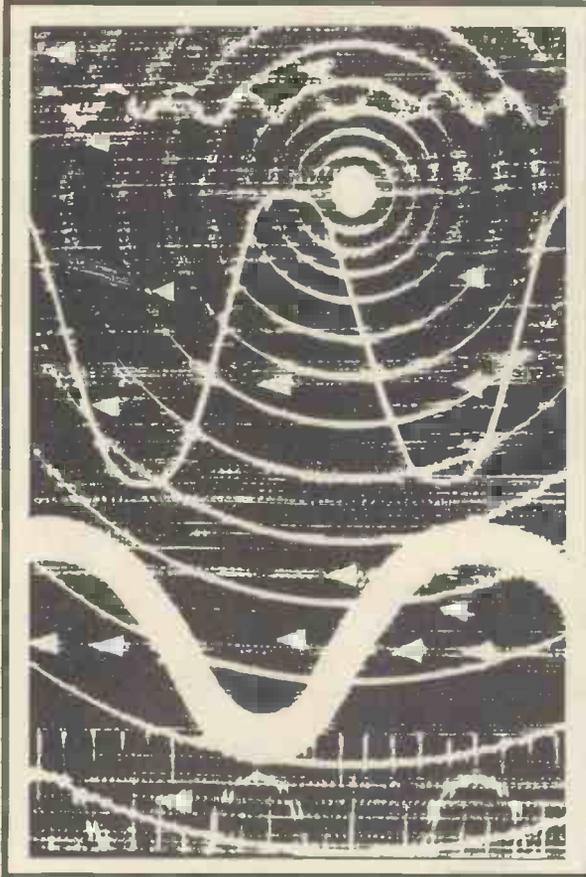

Get a line on world markets! See what the competition is about! The Hanover Fair is your ideal place for both. Here you'll see no fewer than 5,500 firms from 30 countries — all arranged logically group by group to help you pinpoint your special interests. You'll find your own particular sector well represented. The 1967 display will again be comprehensively international — don't fail to give it your scrutiny.

Brochure and full information from:
Deutsche Messe- und Ausstellungs-AG
3 Hannover-Messegeleände, Germany

HANOVER FAIR

... Today's Market for
Tomorrow's Technology

Schenkers Limited,



Royal London House,
13, Finsbury Square,
London, E.C.2.
Telex: 22625

WW—040 FOR FURTHER DETAILS

**YOU CAN
NOW BUY THE
WORLD'S FINEST
SPEAKER VALUE
DIRECT FROM**

R&A

The 700 Mark V Range

Specially designed to provide outstanding range, smoothness and uniformity of frequency response with freedom from self generated forms of distortion up to levels more than adequate for domestic listening. The speakers in this range all have a highly developed dual radiating system with optimum termination of both cones — voice coil impedance 15 ohms.



Power handling capacity in appropriate enclosures:—

780 Mk. V 8 in. 6 watts r.m.s. 12 watts peak.	Price £3.19.7 (inc. 11/7 P.T. and P. & P.)
7100 Mk. V 10 in. 8 watts r.m.s. 15 watts peak.	Price £4.14.3 (inc. 13/9 P.T. and P. & P.)
7120 Mk. V 12 in. 10 watts r.m.s. 18 watts peak.	Price £4.18.6 (No P.T. but inc. P. & P.)


Send for full technical data sheet with suggestions for enclosures to:

R&A

REPRODUCERS AND AMPLIFIERS LTD.
Frederick Street, Wolverhampton England

LOUD SPEAKER MANUFACTURERS TO THE
RADIO INDUSTRY SINCE 1930

WW—041 FOR FURTHER DETAILS

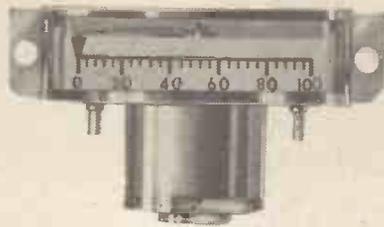

thinsideout


New Taylor Model 11's let you put a full $1\frac{1}{16}$ -inch scale into far less than a square inch of panel space

No one, and certainly not Taylor, would suggest that 'the smaller the better' applies to panel meters. But sometimes there just isn't space for beautiful big displays that can be read from right across the room. Those are exactly the times when the new Taylor Model 11's can mean the difference between a good meter and no meter at all. Each of these compact Edgewise units takes up

only 0.84 sq. in. of panel space, and yet provides a long $1\frac{1}{16}$ inches of high-visibility scale behind a rugged triangular pointer. They come in a wide variety of sensitivities from 50 μ A, incorporate magnetically shielded centre-pole movements, and provide accuracies of 3% fsd (d.c.) and 4% fsd (a.c.). For complete technical and price information about these new panel meters that can be real life-savers when space is at a premium, write to Taylor Electrical Instruments Limited, Montrose Avenue, Slough, Bucks., telephone SLough 21381, or telex 84429.

INSTRUMENTS FOR INDUSTRY

One of our "up to the minute" instruments for "up to the minute" requirements. Available for speedy delivery in a wide range of microammeters, milliammeters and voltmeters both DC and rectified AC.

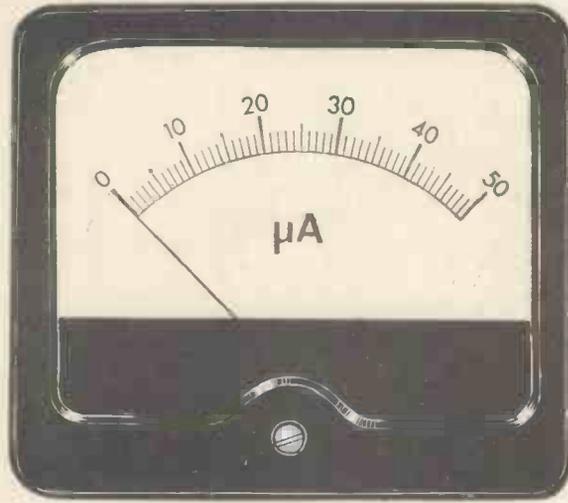

This is an actual size illustration of our model "SQ 2" in black moulded case. Further information on this range, and other modern stylings, will be sent on request.


HARRIS ELECTRONICS (LONDON) LIMITED

138 Gray's Inn Road, W.C.1.

'Phone Terminus 7937

WW-043 FOR FURTHER DETAILS

ACCEL Insulated Flexible Shaft Couplers

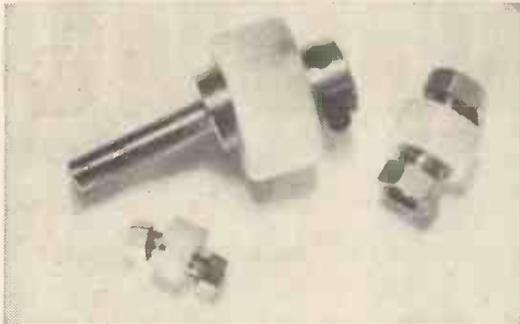


BRITEC LIMITED

17 Charing Cross Road, London, W.C.2. WHITEHALL 3070

WW-044 FOR FURTHER DETAILS

A. C. SOLENOID

TYPE SBM

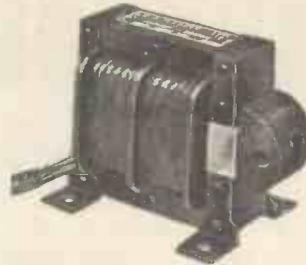

Now fitted with stainless steel guides—six times the life
Continuous 3½ lb. at 1 in.
Instantaneous to 16 lb.
Larger and smaller sizes available
Also—transformers to 8kVA 3 phase.

R. A. WEBBER LTD.

KNAPPS LANE, CLAY HILL, BRISTOL 5

PHONE 65-7228/9

WW-045 FOR FURTHER DETAILS


NEW MICROPHONE INPUT TRANSFORMER

TYPE TG 4731

This addition to the Partridge range (illustrated approx. actual size) is one of four new types designed for the Mullard 50W. transistorised Public Address Amplifier.

Brief Specification

Primary resistance	2.1 ohms total
Secondary resistance	690 ohms
Secondary inductance	20H at 1 kc/s
Secondary leakage inductance	5µH
Finish	Vacuum varnish impregnated
Approximate weight	1½ ozs.
List price	35/-

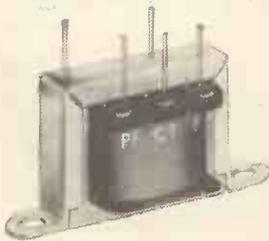

Partridge

Write or phone today for information on these new transformers (data sheet No. 43 refers) or other Partridge Types specified for leading published circuits.

PARTRIDGE TRANSFORMERS LTD.

Roebuck Road, Chessington, Surrey. Telephone: LOWER Hook 4353-4-5



WW-046. FOR FURTHER DETAILS

VALUABLE NEW HANDBOOK **FREE** TO AMBITIOUS ENGINEERS

Have you had *your* copy of "Engineering Opportunities"?

The new edition of "ENGINEERING OPPORTUNITIES" is now available—without charge—to all who are anxious for a worthwhile post in Engineering. Frank, informative and completely up to date, the new "ENGINEERING OPPORTUNITIES" should be in the hands of every person engaged in any branch of the Engineering industry, irrespective of age, experience or training.

On 'SATISFACTION OR REFUND OF FEE' terms

This remarkable book gives details of examinations and courses in every branch of Engineering, Building, etc., outlines the openings available and describes our Special Appointments Department.

WHICH OF THESE IS YOUR PET SUBJECT?

ELECTRONIC ENG.

Advanced Electronic Eng. — Gen. Electronic Eng. — Applied Electronics — Practical Electronics — Radar Tech. — Frequency Modulation — Transistors.

RADIO ENG.

Advanced Radio — Gen. Radio — Radio & TV Servicing — TV Eng. — Telecommunications — Sound Recording — Automation — Practical Radio — Radio Amateurs' Exam.

ELECTRICAL ENG.

Advanced Electrical Eng. — Gen. Electrical Eng. — Installations — Draughtsmanship — Illuminating Eng. — Refrigeration — Elem. Electrical Science — Electrical Supply — Mining Electrical Eng.

MECHANICAL ENG.

Advanced Mechanical Eng. — Gen. Mechanical Eng. — Maintenance Eng. — Diesel Eng. — Press Tool Design — Sheet Metal Work — Welding — Eng. Pattern Making — Inspection — Draughtsmanship — Metallurgy — Production Eng.

CIVIL ENG.

Advanced Civil Eng. — Gen. Civil Eng. — Municipal Eng. — Structural Eng. — Sanitary Eng. — Road Eng. — Hydraulics — Mining — Water Supply — Petrol Tech.

AUTOMOBILE ENG.

Advanced Automobile Eng. — Gen. Automobile Eng. — Automobile Maintenance — Repair — Automobile Diesel Maintenance — Automobile Electrical Equipment — Garage Management.

WE HAVE A WIDE RANGE OF COURSES IN OTHER SUBJECTS INCLUDING CHEMICAL ENG., AERO ENG., MANAGEMENT, INSTRUMENT TECHNOLOGY, WORKS STUDY, MATHEMATICS, ETC.

Which qualification would increase your earning power?
A.M.I.E.R.E., A.M.I.Mech.E., A.M.S.E., A.M.I.C.E., B.Sc.,
A.M.I.P.E., A.M.I.M.I., A.R.I.B.A., A.I.O.B., A.M.I.Chem.E., A.R.I.C.S.,
M.R.S.H., A.M.I.E.D., A.M.I.Mun.E., C.ENG., CITY & GUILDS,
GEN. CERT. OF EDUCATION, ETC.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY
411A ALDERMASTON COURT, ALDERMASTON, BERKSHIRE

THIS BOOK TELLS YOU

- ★ HOW to get a better paid, more interesting job.
- ★ HOW to qualify for rapid promotion.
- ★ HOW to put some letters after your name and become a key man . . . quickly and easily.
- ★ HOW to benefit from our free Advisory and Appointments Depts.
- ★ HOW you can take advantage of the chances you are now missing.
- ★ HOW, irrespective of your age, education or experience, YOU can succeed in any branch of Engineering.

132 PAGES OF EXPERT CAREER-GUIDANCE

PRACTICAL EQUIPMENT

Basic Practical and Theoretic Courses for beginners in Radio, T.V., Electronics, etc. A.M.I.E.R.E. City & Guilds Radio Amateurs' Exam., R.T.E.B. Certificate, P.M.G. Certificate, Practical Radio, Radio & Television Servicing, Practical Electronics, Electronics Engineering, Automation.

INCLUDING TOOLS

The specialist Electronics Division of B.I.E.T. NOW offers you a real laboratory training at home with practical equipment. Ask for details.

B.I.E.T.

You are bound to benefit from reading "ENGINEERING OPPORTUNITIES," Send for your copy now—FREE and without obligation.



POST NOW!

TO B.I.E.T., 411A ALDERMASTON COURT, ALDERMASTON, BERKSHIRE.

3d. stamp if posted in an unsealed envelope.

Please send me a FREE copy of "ENGINEERING OPPORTUNITIES." I am interested in (state subject, exam., or career).

NAME

ADDRESS

WRITE IF YOU PREFER NOT TO CUT THIS PAGE

THE B.I.E.T. IS THE LEADING INSTITUTE OF ITS KIND IN THE WORLD

LITTLE KING MINI-POWER RELAYS


EX STOCK

Screw-Fix type 2, 3 & 4 pole.

Quick-Change type 2 & 3 pole.

12 & 24 VDC, 100 & 240 VAC.


Little space required: Screw-Fix 1.7 sq. in., Quick-Change 2.0 sq. in. King size switching: Screw-Fix 2 KVA, Quick-Change 1.5 KVA. 10 million operations (proof tested to 27 million).

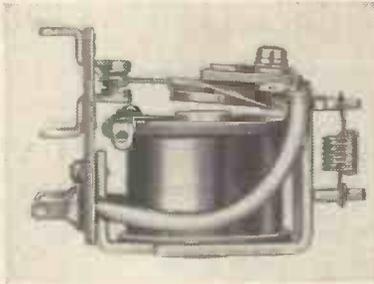

3,000 TYPE RELAYS EX STOCK

Ex Stock specially manufactured to meet general purpose requirements

Fitted with standard twin silver contacts for 150 v./0.6 A. a.c./0.3 A. d.c. 2 c/o., 4 c/o. and 6 c/o.—500Ω, 1,000Ω and 2,000Ω—6 to 110 v. d.c.

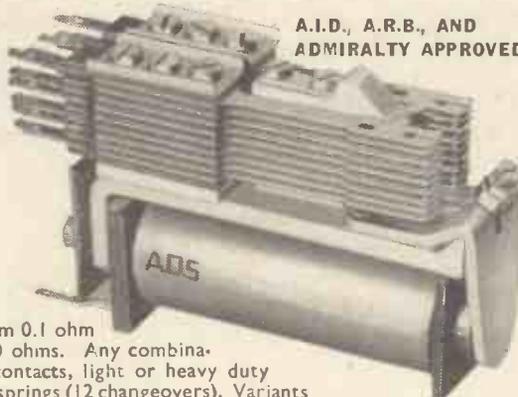

A.I.D., A.R.B., AND ADMIRALTY APPROVED

Coils from 0.1 ohm to 50,000 ohms. Any combination of contacts, light or heavy duty up to 36 springs (12 changeovers). Variants include: Plug-in, London Twin, Industrial 3 (10-30 A), Remanent, Latching, Solid State Timers (1 sec. to 15 mins.), Transistorised Relays.

PRINTACT

Printed Circuit Relays. 6, 12, 24 VDC. Palladium contacts. Size: 7/16 in. cube. Weight: 0.8 oz. Dielectric test: 1,000 VRMS 6 cps. Bifurcated double-break contacts; Balanced armature; Enclosed housing; Plug-in application; Encapsulated coil.



ads RELAYS

A.D.S. RELAYS LTD.
97, ST. JOHN STREET,
LONDON, E.C.1.
Telephone: CLErkenwell 3393.

WW-048 FOR FURTHER DETAILS

TELEPRINTERS · PERFORATORS REPERFORATORS · TAPEREADERS EDITING & REPRODUCING SETS

Codes: Int. No. 2 Mercury/Pegasus, Elliot 803. Binary and special purpose Codes.



2-5-6-7-8 TRACK AND MULTIWIRE EQUIPMENT



TELEGRAPH AUTOMATION AND COMPUTER PERIPHERAL ACCESSORIES


Picture Telegraph, Desk-Fax, Morse Equipment; Pen Recorders, Switchboards; Converters and Stabilised Rectifiers; Tape Holders, Pullers and Fast winders; Governed, Synchronous and Phonic Motors; Teleprinter Tables and Cabinets; Silence Covers; Distortion and Relay Testers; Send/Receive Low and High Pass Filters; Teleprinter, Morse, Teledeltos Paper, Tape and Ribbons; Polarised and specialised relays and Bases; Terminals V.F. and F.M. Equipment; Telephone Carriers and Repeaters; Multiplex Transmitters; Diversity Frequency Shift, Keying Equipment; Line, Mains Transformers and Suppressors; Racks and Consoles; Plugs, Sockets; Key, Push, Miniature and other Switches Cords, Wires, Cables and Switchboard Accessories; Teleprinter Tools; Stroboscopes and Electronic Forks; Cold Cathode Matrices; Test Equipment; Oscilloscopes; Miscellaneous Accessories and Spares.

W. BATEY & COMPANY

Gaiety Works, Akeman Street, Tring, Herts.
Tel.: Tring 3476 (3 lines) Cables: RAHNO TRING
STD: OHN 282 TELEX 82362

WW-049 FOR FURTHER DETAILS

FRACTIONAL HORSEPOWER ELECTRIC MOTOR MANUFACTURERS



THE HALL MARK
OF QUALITY MOTORS

REGISTERED
TRADE MARK

PROMPT & PERSONAL SERVICE

WRITE TODAY FOR DETAILS

COMTEX LTD

(DEPT. WW) 566 CABLE STREET,
LONDON, E.1, ENGLAND
Telephone: Stepney Green 1400

WW-050 FOR FURTHER DETAILS



a mountain of meters for Mahomet

(or just one if that's all you want)


We mean no disrespect, of course. We are merely underlining the fact that a 'mountain of meters' does exist. Here at Anders there are the largest stocks of standard and non-standard meters in the United Kingdom. Our aim is to give off-the-mountain delivery of the greatest variety of meters to the greatest variety of meter users. If you want a meter—or quite a lot of meters—standard or special—you needn't wear out your patience or your sandals. You needn't even come to the mountain. Just pick up the telephone. . . .

□ Meters of all kinds from stock □ Meter calibration/Meter modification/Ancillary equipment □ Custom-designed meter circuitry and components □ Sole U.K. distributors of FRAHM vibrating reed frequency meters and tachometers and of the EKM range of portable voltmeters, ammeters and wattmeters.

ANDERS METER SERVICE

Anders Electronics Ltd • 103 Hampstead Road • London NW1
Telephone Euston 1639 *Ministry of Aviation Approved.*

WW—051 FOR FURTHER DETAILS

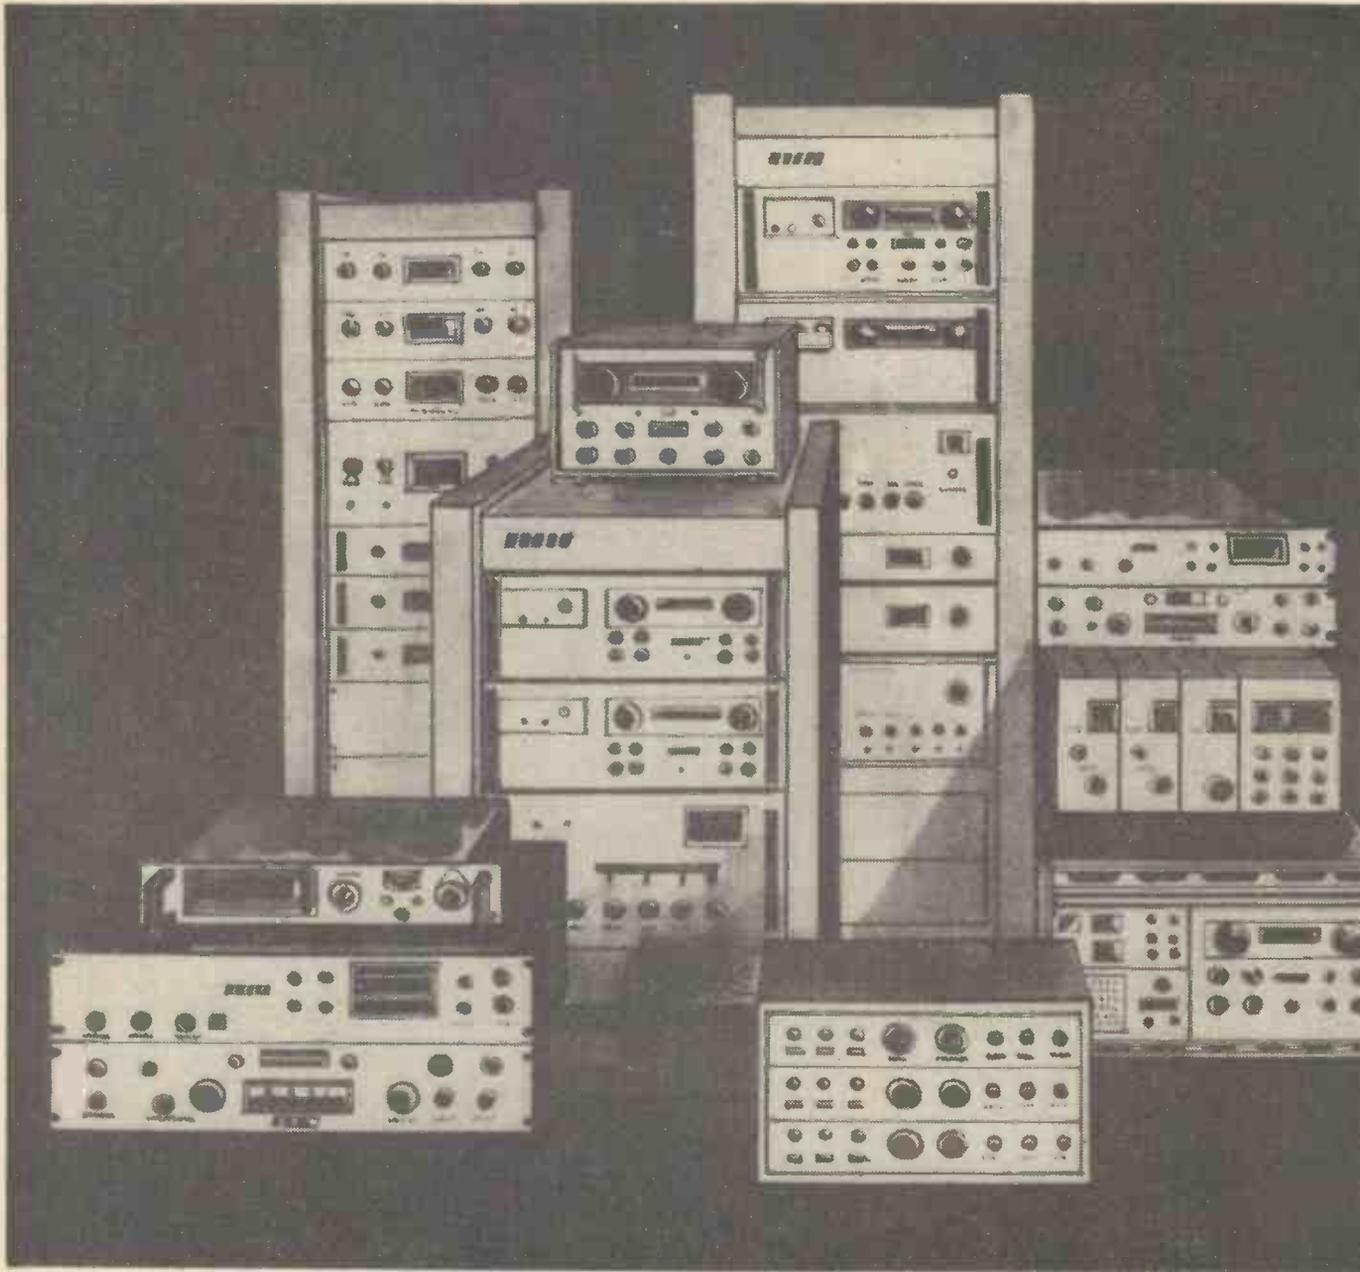

RACAL

the name for communications receivers

Racal is a world leader in solid state HF communications receivers and systems. Name your requirement and Racal can meet it. Any facility which you require exists within the brilliantly designed modular equipments which Racal produces. The complete system of your choice with its adaptors, synthesizers and ancillaries assembled into a cabinet of the highest professional standard can be made available to you quickly.

The Racal name in Communications stems from the internationally famous RA.17 series of receivers. Its successor, the all solid state RA.217, forms the basic receiver for future Racal receiver systems. Like its predecessor, the RA.217 series, has the same unequalled standard of receiver performance. A standard of performance chosen and preferred by major users in almost every country of the world.

Wherever communication is vital – choose Racal. You'll choose wisely.

Racal Communications Limited · Western Road · Bracknell · Berks · England.

“Now in production—the world’s largest selection of Solid-State HF Communications Receivers, Synthesizers, Adaptors, Ancillaries and Receiver Systems”




**THE RACAL
RA. 1217
SOLID-STATE
COMMUNICATIONS
RECEIVER
(rack version of RA.217)**


1 to 30 MHz, DSB, SSB, MCW, CW, fully transistorised, high sensitivity stability and setting accuracy, facilities for external frequency control.

WHITELEY for acoustic hoods

All noisy environments such as factories, workshops, department stores and hotels require the facility of an acoustic hood which permits telephone conversations to be held without the interference of annoying background noises. Whiteley acoustic hoods are strongly made from resin bonded ply and finished in a cellulose enamel which makes these suitable for indoor or outdoor use.

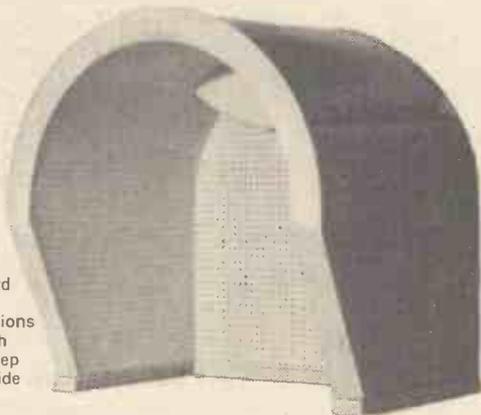

Standard Hood
Dimensions
25" high
20 1/2" deep
24 1/2" wide

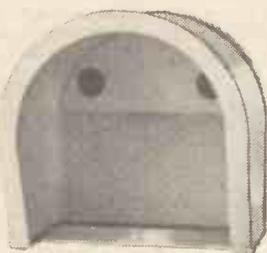


Fitted with loudspeakers



Fitted with doors for outdoor use

Also available with internal light and/or a storage shelf below hood

& directory holders

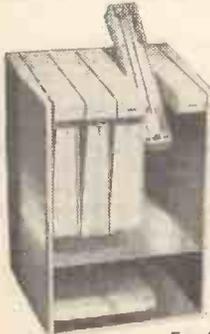

These attractive, and extremely functional directory holders will hold five directories neatly and securely, in individual swivel holders permitting easy identification and reference. The lower shelf provides additional storage space. The units are of cast alloy and are finished in an attractive grey epoxy resin enamel and constructed to strict G.P.O. design specifications.

Directory Holder Dimensions
17 1/2" high x 13 1/2" wide x 13 3/8" deep

For further details please write or telephone

WHITELEY ELECTRICAL RADIO CO. LTD

MANSFIELD · NOTTS · ENGLAND Tel: Mansfield 24762
London Office: 109 KINGSWAY, W.C.2 Tel: HOLborn, 3074

WW-054 FOR FURTHER DETAILS


WB178

N.C.BROWN LTD


MAIL ORDER DIVISION

pacesetters in storage equipment

36-DRAWER UNIT
'SPACE SAVER' 36A. Overall size 42" high, 24 1/2" wide, 12" deep. 36 drawers. In best quality steel, stove enamelled dark green. £12.0.0.

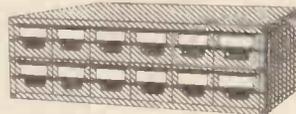

12-DRAWER UNIT
POPULAR 12A
12 drawers in a compact nest measuring 9" high, 35" wide, 12" deep—an invaluable storage asset for the very economical price of only £4.15.0.

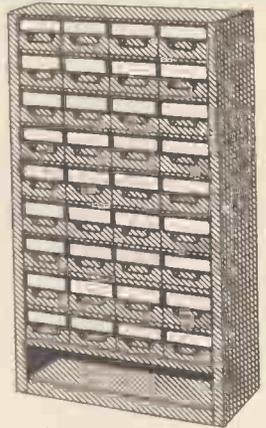

TO: N. C. BROWN LTD. Dept. E29

Heywood Lancs Tel. 69018

London: Dept. E29 25 Newton St., W.C.2

Please send me a copy of your free illustrated catalogue.

Please send me a 36A drawer unit 12A drawer unit

Tick where applicable and send cash with order.

NAME

ADDRESS


WW-055 FOR FURTHER DETAILS

PLUGS & SOCKETS

DIRECT



FROM STOCK




72 page
CATALOGUE
NOW AVAILABLE

- A.E.I.
- AMPHENOL
- AN SERIES
- BELLING LEE
- BENDIX
- BICC - BURNDY
- BURNDY
- BULGIN
- CANNON
- CONTINENTAL
- ELCOM
- ELECTRO METHODS
- ETHER - WINCHESTER
- GREENPAR
- HARVEY HUBBELL
- MAGNETIC DEVICES
- McMURDO
- 'MS' SERIES
- NIPHAN
- PAINTON
- PATON
- P.E.T.
- PLESSEY
- PYLE
- SMART & BROWN
- SMITHS
- SUPERFLEXIT
- THORN
- TRANSRADIO
- UG SERIES



LIND-AIR
Electronics
Ltd. CONNECTORS DIVISION
53 TOTTENHAM COURT ROAD, LONDON W.1.
LANgham 3653

WW-056 FOR FURTHER DETAILS

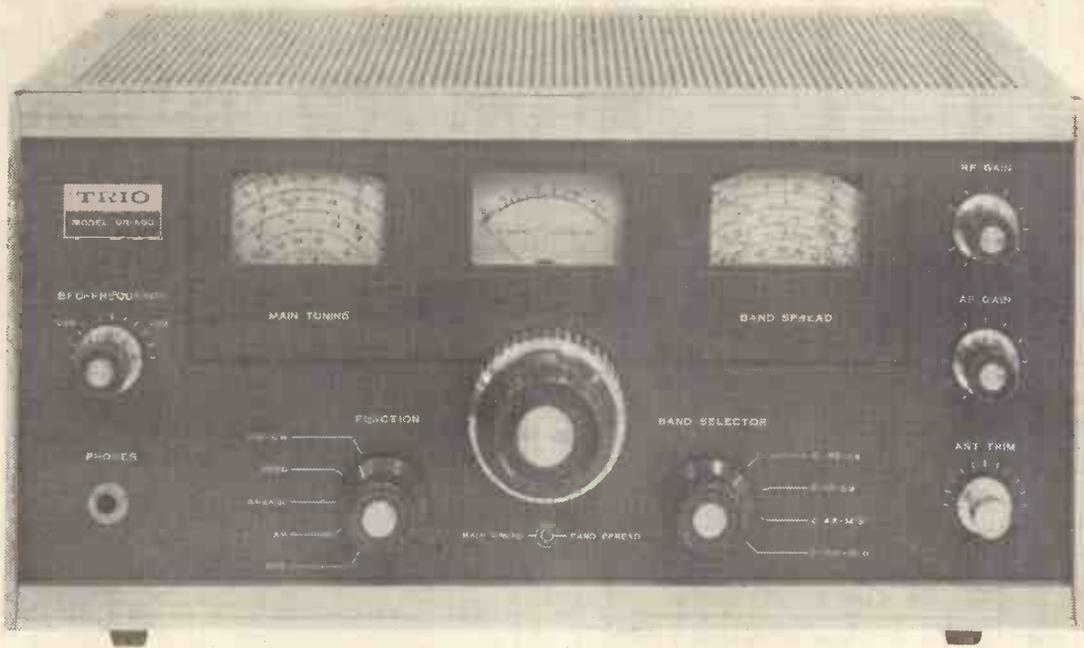

A REAL TESTIMONIAL!
TRIO Communication Equipment
 Enjoy 80% of the Market
 In Japan.

Almost all amateur signals
 from Japan are transmitted
 by TRIO'S equipment.

the sound approach to quality
TRIO

Model 9R-59DE

Built in mechanical filter 8 tubes communication Receiver

- * Illuminated dials permit easy tuning band spread readings. * Continuous coverage from 550 KHz to 30 MHz and direct reading dial on amateur bands. * Close calibration accuracy with an excellent anti-backlash mechanism. * A mechanical filter enabling superb selectivity with ordinary IF transformers. * One RF and two audio stages of amplification, insuring high sensitivity and selectivity. * A Product Detector making possible clear SSB reception.
- * Frequency Range: 550 KHz to 30 MHz (4 Bands) * Sensitivity: 2 μ V for 10dB S/N Ratio (at 10 MHz)
- * Selectivity: \pm 5 KHz at -60 dB (\pm 1.3 KHz at -6 dB) When use the Mechanical Filter * Power Consumption: 45VA at 117 Volts AC, 50/60 CPS. * Audio Power Output: 1.5 Watts * Dimension: Width 15", Height 7", Depth 10".



JR-500SE

Model JR-500SE

CRYSTAL CONTROL TYPE DOUBLE CONVERSION COMMUNICATION RECEIVER

- * Superior stability performance is obtained by the use of a crystal controlled first local oscillator and also, a VFO type 2nd oscillator.
- * Frequency Range: 3.5 MHz—29.7 MHz (7 Bands)
- * HI-Sensitivity: 1.5 μ V for 10 dB S/N Ratio (at 14 MHz) * HI-Selectivity: \pm 2 KHz at -6 dB \pm 8 KHz at -60 dB



TR-2E

Model TR-2E

BUILT-IN VFO 2m TRANCEIVER

- * The unit incorporates a built-in power supply, which enables AC operation from either 117 or 230 volt power sources. The power supply also has an Internal DC Converter, so that the unit can be operated from a 12V DC battery, enabling the transceiver to be used also for mobile applications.
- * Frequency Range: 144—148 MHz AM * HI-Sensitivity: 1 μ V for 10 dB S/N in 145.5 MHz (0.05-W Audio Output) * HI-Selectivity: 20 dB down at 10 KHz.

Manufactured By **TRIO CORPORATION** 6-5, 1-chome, Shibuya, Shibuya-ku, Tokyo, Japan

Sole Agency for the U.K.: Winter Trading Co., Ltd., Winter House, 95-99, Ladbroke Grove, London. W. 11, Phone: Park 1341 (10 lines)



BEAT THE SQUEEZE WITH THE NEW 'IS' RANGE OF

TRANSIPACK®

INEXPENSIVE SINE-WAVE (50 Hz)

STATIC INVERTERS

EXAMPLE
606/IS/300
24v DC / 240v AC / 300VA

£136.0.0

OTHERS PRO-RATA

- Field or EMERGENCY Supply
- Freq. Stab. 1% or better
- Thyristor Control
- Regulated Output
- Ex-stock

**INDUSTRIAL
INSTRUMENTS
LIMITED**
STANLEY ROAD · BROMLEY · KENT
Telephone: RA Vensbourne 9212/3.
Telegraphic Address: TRANSIPACK BROMLEY

WW-058 FOR FURTHER DETAILS

CHASSIS and CASES

by *Smith's*
of
EDGWARE ROAD

H. L. SMITH & CO. LTD.
Electronic Components · Audio Equipment

287/289 EDGWARE ROAD, LONDON, W.2.
Tel: PADDINGTON 5891/7595

We shall be pleased to quote for all your component requirements.

BLANK CHASSIS

SAME DAY SERVICE

Of over 20 different forms made up to YOUR SIZE.
(Maximum length 35in., depth 4in.)

SEND FOR ILLUSTRATED LEAFLETS

or order straight away, working out total area of material required and referring to table below, which is for four-sided chassis in 16 s.w.g. aluminium.


48 sq. in.	4/6	176 sq. in.	9/10	304 sq. in.	15/2
80 sq. in.	5/10	208 sq. in.	11/2	336 sq. in.	16/6
112 sq. in.	7/2	240 sq. in.	12/6	368 sq. in.	17/10
144 sq. in.	8/6	272 sq. in.	13/10		
P. & P. 2/6.		P. & P. 3/-.		P. & P. 4/6.	

Discounts for quantities. More than 20 sizes kept in stock for callers.

FLANGES (½in., ¾in.), 6d. per bend.

STRENGTHENED CORNERS 1/- each corner.

PANELS: Any size up to 3ft. at 6/- sq. ft. 16 s.w.g. (18 s.w.g. 5/3). Plus post and packing.

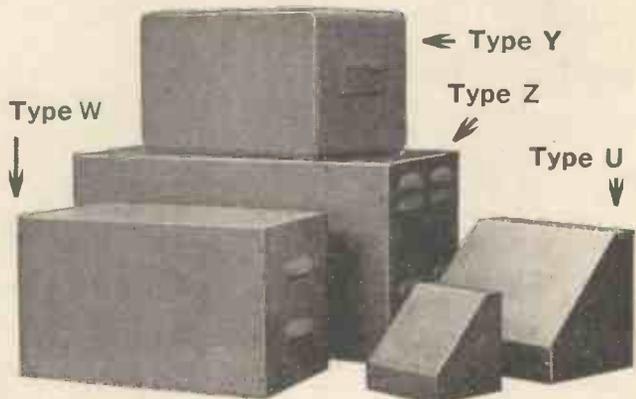

CASES

ALUMINIUM, SILVER HAMMERED FINISH		SILVER HAMMERED FINISH		Price
Type	Size	Type	Size	
U	4 x 4 x 4*	Y	8 x 6 x 6*	26/6
U	5½ x 4½ x 4½	Y	12 x 7 x 7	41/-
U	8 x 6 x 6	Y	13 x 7 x 9	46/-
U	9½ x 7½ x 3½	Y	15 x 9 x 7	48/6
U	15 x 9 x 9	Z	17 x 10 x 9	66/-
W	8 x 6 x 6	Z	19 x 10 x 8½	71/-
W	12 x 7 x 7			
W	15 x 9 x 8			

Plus post and packing.

Type U has removable bottom or back, Type W removable front, Type Y all-screwed construction, Type Z removable back and front.


WW-059 FOR FURTHER DETAILS

SUPERIOR PERFORMANCE

Celestion

Studio Series

LOUDSPEAKERS

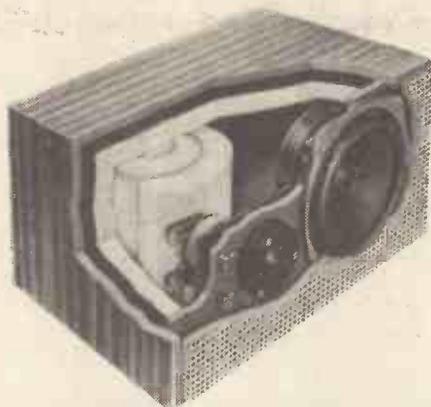

The Ditton 10

The Ditton 10 is a compact high-fidelity reproducer measuring only 12 $\frac{3}{4}$ " x 6 $\frac{3}{4}$ " x 8 $\frac{1}{4}$ ". We, along with many thousands of satisfied users throughout the world, consider it to be the finest loudspeaker in its class—sales certainly substantiate this.

If you are in doubt ask your audio dealer to demonstrate the Ditton 10 against any other comparable system.

Brief Specification

Power handling capacity	10 watts R.M.S.
Overall frequency response	35-15,000 c/s
Impedance	15 ohms
Size	12 $\frac{3}{4}$ " x 6 $\frac{3}{4}$ " x 8 $\frac{1}{4}$ " (323mm x 171mm x 203mm)

Price £19.6.0. inc. P.T. plus 5/7d. surcharge.



CX2012

When installed in a suitably designed enclosure the CX 2012 12" Co-axial loudspeaker provides truly professional sound quality.


A highly compliant cone surround allows maximum linear movement and minimises harmonic distortion.

Sensitivity of the co-axially mounted, horn-loaded, compression high note unit may be adjusted by means of the "Brilliance" control provided.

Brief Specification

Power handling capacity	20 watts R.M.S.
Overall frequency response	30-18,000 c/s
Impedance	15/16 ohms

Price
£17.10.0.

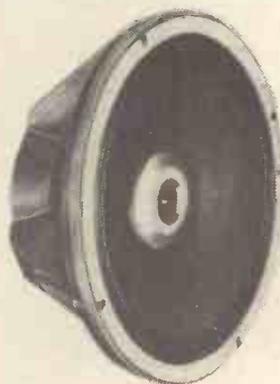

CX1512

A lower powered alternative to Model CX 2012, Model CX 1512 provides the high standards of performance demanded by professional users.

Price £12.5.0.

Brief Specification

Power handling capacity	15 watts R.M.S.
Overall frequency response	30-15,000 c/s
Impedance	15/16 ohms

SMALLER ENCLOSURES

Celestion research engineers have now evolved two new enclosure designs of only 2.5 cu. ft. to accommodate the above co-axial loudspeakers. Their external dimensions (using $\frac{3}{4}$ " timber) are only 30" x 17 $\frac{1}{2}$ " x 11 $\frac{1}{2}$ ". Full details are given on the colour brochure.

Celestion

Studio Series

CELESTION LTD

Ferry Works, Thames Ditton, Surrey.

Tel: 01-398 3402

Celestion Ltd., Ferry Works, Thames Ditton, Surrey.

Please send me full details of the Studio Series range of loudspeakers.


Name _____

Address _____


A 21 _____



have a *name for it!

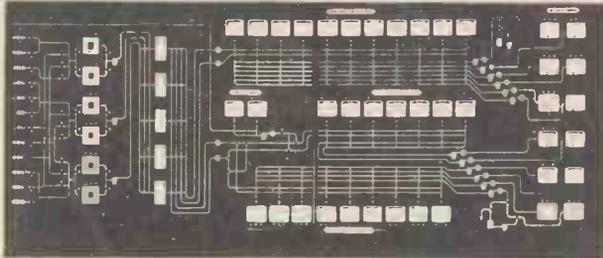

They call it
*
INDICATIVE INTEGRATION

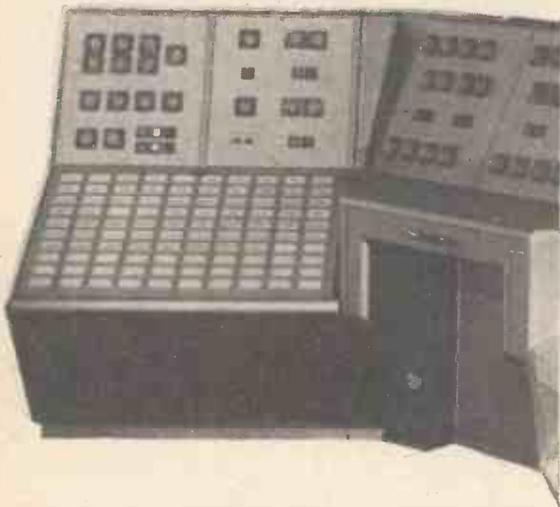

K.G.M. offer a greater variety of Digital Indicators than any other manufacturer. For years they have been designing and making Mimic Diagrams and Control Consoles. Their combination of know-how and manufacturing resources deserves its own title. Ask for the Indicative Integration brochure and see what we mean.

KGM

electronics limited
BARDOLPH RD RICHMOND
Phone: RICHmond 7171 Surrey

WW-061 FOR FURTHER DETAILS

M. R. SUPPLIES, Ltd.

(Established 1935)

Known for many years as the most reliable source of the following specialised material—always right up to date. Careful packing—immediate delivery. Prices nett.

THERMOSTATS. Open type. Made by Sunvic Controls for building in equipment. Variable from 30 to 80°. 3 degree diff. 15 amps A.C. Switching. 6/6 ea. (des. 2/6).

EXTRACTOR FANS. Ring mounted all metal construction. T/E induction motor, silent operation. 8in. Blade, 10in. max. dia. 400 C.F.M. £5/15/- (des. 5/7). Same model 10in. Blade, 12in. max. dia. 500 C.F.M. £8/6/- (des. 5/7).

ELECTRIC GRINDERS. 200/250 v. A.C. Fitted coarse and fine 3in. grinding wheels. Very handy for many domestic and industrial uses. Foot mounted, overall length 7in. £7/15/- (des. 3/6).

MINIATURE RUNNING TIME METERS (Sangamo). We have great demands for this remarkable unit and can now supply immediately from stock. 200/250 v. 60 c. synchronous. Counting up to 9,999 hours, with 1/10th indicator. Only 1 1/2in. square, with cyclometer dial, depth 2in. Many industrial and domestic applications to indicate the running time of any electrical apparatus—easy to install, 60/- (post paid).

SMALL GEARED MOTORS. In addition to our well-known range (List GM 564), we offer small open type S.F. units, 200/250 v. A.C., 1, 6, 12, 24, 60 r.p.m., approx. 5in. long, with 1in. shaft projection. Suitable for display work and many industrial uses. Only 60/6 (des. 3/7).

SYNCHRONOUS TIME SWITCHES (Our very popular speciality). 200/250 v. 60 c., for accurate pre-set switching operations. Sangamo S.254, providing up to 3 on-off operations per 24 hours at any chosen time with day-omitting device (use optional). Capacity 20 amps. Compactly housed, 4in. dia., 3 1/2in. deep. With full instructions, £5/18/6 (des. 3/7). Also same make, same duty. Domestic Model fitted with 13-amp. plug for easy installation, portable, £4/9/6 (des. 3/7). Other ratings of Time Switches available for special requirements—please enquire.

MINIATURE VARIABLE TRANSFORMERS (Phillips). Remarkable and very popular offer from stock. Open type—panel mount, only 3 1/2in. dia. Input 200/240 v. Output 0/240 v. 0.5 amp. continuous, £3/18/6 (des. 2/6).

AIR BLOWERS. Highly efficient units fitted induction totally enclosed motor 230/260 v. 50 c. 1 ph. Model 8D.26, 80 CFM (free air) to 11.5 CFM at .15 WG (size approx.) 6 x 6 x 7in. Outlet 2 1/2in. square, £8/10/- (des. 5/7). Model 8D.27, 120 CFM (free air) to 40 CFM at 1.2 WG, 6 x 7 x 9in. outlet 2 1/2in. sq., £11/15/6 (des. 5/7). Model 8D.28, 260 CFM (free air) to 127 CFM at 1.5 WG, 11 x 8 x 9in., outlet 3in. sq., £13/17/6 (des. U.K. 7/6).

SYNCHRONOUS ELECTRIC CLOCK MOVEMENTS (as mentioned and recommended in many national journals). 200/250 v. 60 c. Self-starting. Fitted spindles for hours, minutes and central sweep seconds hands. Central one-hole fixing. Dia. 2 1/2in. Depth behind dial only 1in. With back dust cover. £9/6 (des. 1/6). Set of three brass hands in good plain style. For 5/7in. dial 2/6. For 8/10in. dial 3/6 set.


SYNCHRONOUS TIMER MOTORS (Sangamo). 200/250 v. 50 c/s. Self-starting 2in. dia. x 1 1/2in. deep. Choice of following speeds: 1 r.p.m., 12 r.p.h., 1 r.p.h., 1 rev. 12 hours, 1 rev. per day. Any one 39/6 (des. 1/6). Also high-torque model (G.E.C.), 2 1/2 x 2in. x 1 1/2in. 6 r.p.m., 57/6 (des. 1/6).

IMMEDIATE DELIVERY of Stuart Centrifugal Pumps, including stainless steel (most models). Phillips Variable Transformers (all models).

M. R. SUPPLIES, Ltd., 68 New Oxford Street London, W.C.1
(Telephone: 01-636 2958)

ELMA

**COUNT
BATCH
CONTROL**

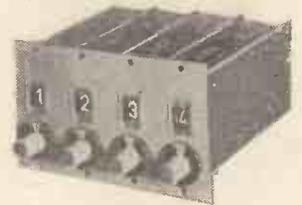

The 4 ELMA single decade counters pictured above cost less than most conventional four figure predetermining counters. Yet they offer several distinct advantages over normal counters, namely:—

1. **FIGURES** nearly twice as large as on conventional counters—with wide angular visibility.
2. **PRESETTING** by a rotary switch on the front panel avoiding the normal method of having to open a flap—thus excluding dirt and dust.
3. **PLUG-IN** digits which can be easily interchanged without having to re-wire.
4. **ELECTRICAL READ-OUT** which gives a separate contact closure for every number in addition to the predetermining signal—enabling direct print-out, etc.

In addition to these features, the ELMA counters will count at up to 25 impulses/sec.; have electrical zero reset; can be forward or backward counting, and can be wired in cascade to form a counter of any number of digits.

Also available is a matched modular range of power units; control relays; impulse transmitters; pushbutton switches and mounting frames.

RADIATRON

7 SHEEN PARK, RICHMOND, SURREY RIC 3285—9352

WW-062 FOR FURTHER DETAILS

for High Fidelity listening


The illustrations show the effective harmony of the styling of the **STEREOMAX** and **MAXAMP 30**, which is equalled by their performance. (Naturally, either instrument can be used with other apparatus of comparable quality, if so desired).

The polished wood housings of both **STEREOMAX** and **MAXAMP 30** are easily removed for flush panel mounting, as shown in the top right hand sketch.

The **MAXAMP 30** has been acclaimed by critics all over the world and is unrivalled anywhere. Read what the critics say. Send for your free copy of the Maxamp Review leaflet and fully illustrated brochures on both the Maxamp 30 and Stereomax.

15 + 15 WATTS · SILICON SOLID STATE · INTEGRATED PRE-AMPLIFIER · NEGLIGIBLE DISTORTION · POLISHED WOOD CASE · 10½" x 5½" x 7¼" deep.

PRICE: £49.10.0.

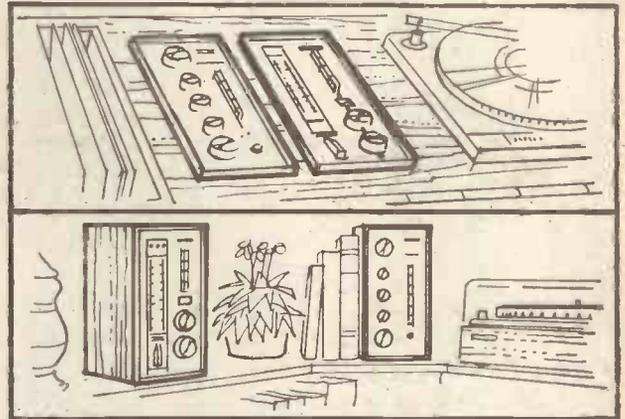

FREE Please send me free copies of:—

Maxamp 30 and Stereomax leaflets/brochures

Goodmans High Fidelity Manual
(Tick which required)


NAME.....

ADDRESS.....

WW 3

MAXAMP30

TRANSISTORISED STEREOPHONIC AMPLIFIER

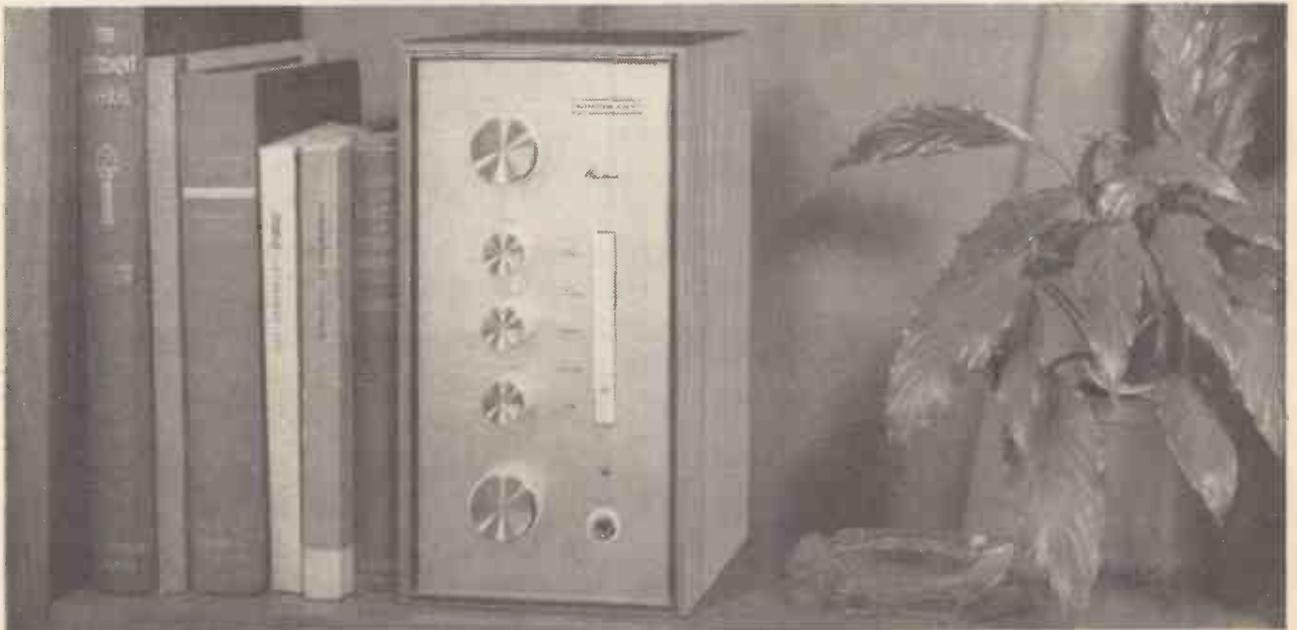

GOODMANS INDUSTRIES · AXIOM WORKS · WEMBLEY · MIDDX · Tel: WEMbley 1200

A Division of Radio Rentaset Products Ltd.

THE *Adamin* DE-SOLDERING TOOL



- Self-contained—does NOT require the use of air-lines or pumps
- Simple, light and inexpensive
- PERMABIT nozzle will not wear or become eroded by the solder
- Standard nozzle, $\frac{5}{8}$ in. bore. Alternative, $\frac{3}{4}$ in. bore
- Mains or low voltages

Literature on request


LIGHT SOLDERING DEVELOPMENTS LTD

28 Sydenham Road, Croydon, Surrey.

Telephone: CRO 8589, 4559

WW—066 FOR FURTHER DETAILS

VITALITY

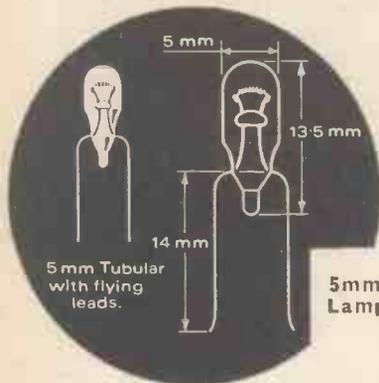

5mm. Diameter Tubular Lamp with Flying Leads

Highly dependable, this little lamp is extensively used wired direct to printed circuits or potted as an integral part of the equipment. In ratings from 0.75v, 0.17w. to 28v, 1.12w., it is designed for an average burning life of 1,000 hours.

Write for catalogue of standard ratings to:—

VITALITY BULBS LTD

MINIATURE AND SUB-MINIATURE LAMP SPECIALISTS
BEETONS WAY, BURY ST. EDMUNDS, SUFFOLK. TEL: 2071. STD. 0284/2071

WW—123 FOR FURTHER DETAILS

DO YOU STILL USE A HAMMER AND CHISEL TO CUT A SQUARE IN SHEET METAL ?

Don't any more

We have a Hand-operated Tool now to cut any straight sided shape. Square R/Angles slots for Louvres. All you do is simply mark out your shape and follow the lines. You can also convert the Tool to a Punch-Forming and Rivetting Tool.

**NO DISTORTION OF METAL
ON EITHER SIDE OF CUT**

Also a number of Bench Type folding machines
EXPORT ORDERS DESPATCHED IMMEDIATELY
AVONLEA TOOLS, WOODEND MILL, MOSSLEY, LANCASHIRE.
MOSSLEY 2687

WW—124 FOR FURTHER DETAILS

Thyristor C 20 D

- Reverse Voltage 400V
- Forward Current 7,40A
- Peak-Surge Forw. Curr. 80A
- Max. Holding Current 30mA



Prices:
1 to 24 32/8
25 up 25/8

RASTRA Electronics Ltd.,
275/281 King Street, London, W.6. Tel: RIV 2960

WW—125 FOR FURTHER DETAILS

2 MHz TIMER COUNTER

£130



The Advance TC7 is an entirely new 4-digit timer counter.

Using all silicon transistors, it measures frequencies up to 2MHz at less than 150 mV r.m.s. It also measures period and time, and counts random or regular pulses. Single or two-line time or count and three clock units - 10µS, 1mS and 0.1 sec. - can be selected by front panel switch.

4 in-line digits: unique 'dynamic' read-out system:

Costs have been saved by the use of a new strobing technique. By cycling the counting stages the need for separate decoding matrices has been eliminated.

It opens like a book for accessibility.

Components are mounted on three hinged printed circuit boards of extremely high quality epoxy resin.

At £130, the Advance TC7 is the lowest priced 2MHz timer counter on the market today. Have a look at it! Ask us for a demonstration.

ADVANCE ELECTRONICS LIMITED

Instrument Division · Roebuck Road · Hainault · Ilford
Essex · Telephone: 01-500 1000

trailing
leads
can be
embarrassing



so don't
let this
happen
to you

use the

RESLO RADIO MICROPHONE




A complete system consisting of a microphone (lavalier neck suspension type allowing unrestricted movement), a low power pocket transmitter for carrying on the person, and a sensitive high performance receiver, providing the audio signal for the associated amplifier and loudspeaker sound system, the purpose being to provide a high quality but *wire free link* between the microphone user and the sound reinforcement installation.

Approved by the Post Office, for operation on 174.8 Mc/s.

RESLOSOUND LIMITED

Spring Gardens, London Road, Romford, Essex
Tel: Romford 49087 & 46645

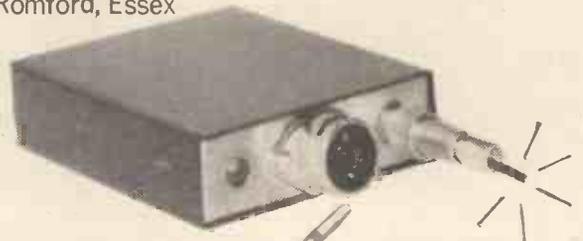

Why is Filmet[®] FM70 the only metal-film resistor with D.E.F. Qualification Approval throughout the range?



Because we have not yet submitted FM65 and FM75

Filmet type FM70 is the first metal-film resistor to obtain Qualification Approval to DEF 5115-1 style RFG7-0.5 over the full range of approved resistance values.

It is one of a range of six Filmet resistors which offer the highest levels of operating stability in wattage ratings from 0.25w to 1.0w at 70°C. Every Filmet resistor is manufactured in our

temperature, humidity and dust controlled clean air unit, one of the finest installations of its kind in Europe.

Filmet quality and reliability are continuously assessed in our approved environmental test house. Total reliability is guaranteed.

Put your trust in Filmet.

Send us the coupon and let us tell you more.

® 'FILMET' is a Registered Trade Mark of Morganite Resistors Limited.

Please send me full details of Filmet metal-film resistors

NAME..... POSITION.....
 COMPANY.....
 ADDRESS.....

Morgan MORGANITE RESISTORS LIMITED

Bede Trading Estate, Jarrow, Co. Durham. Tel: Jarrow (ONE-2) 897771. Telex: 53353



surprise



surprise



WW-070 FOR FURTHER DETAILS

Hi-Q
 LOW LOSS
 PRECISION
 LIGHT-WEIGHT
 AIR-WOUND



Freq M/cs 5.0
 "Q" 290

INTRODUCING our new series of precision, air spaced inductors, available in diameters from $\frac{3}{4}$ " to 3" and a wide range of inductances.

CODAR-COILS

are the only complete range of air-spaced precision inductors available today on short delivery. Specials to specification can be supplied and prototype samples are available to designers.

Brochure giving data of types/inductance—capacity-frequency on request.



CODAR RADIO CO.
 Bank House • Southwick Square
 Southwick • Sussex
 'phone • Southwick 3149

WW-071 FOR FURTHER DETAILS

Perhaps you will be as surprised as the pundits when you hear the facts* about the BSR C1 ceramic cartridge "... another milestone on the public right-of-way to high fidelity"—said *The Gramophone*.

You could even be surprised to know that the BSR UA70 manual/automatic turntable unit is fitted with such a splendid cartridge and that its all round performance is equal to such high standards. But maybe not... you could be one of those sensible people who knew all along that BSR don't just make a lot of autochangers but a lot of *very good* autochangers.

*If you'd like to read the independent test reports write to Arthur Nicholls at:

BSR Limited, Monarch Works, Old Hill, Staffordshire.



for better
sound reproduction

**BSR UA70
SPECIFICATION**

Turntable
Wow Less than -2%
Flutter Less than -0.6%
Long term speed variation
Less than -5%
(mains voltage $\pm 10\%$)

Rumble (ref.1kHz) —29 dB

Pick-up arm

Counterbalanced lightweight arm with calibrated tracking pressure control, integral cueing device and automatic lock.
Tracking pressure (depending on cartridge)
2 grams. min.

Cartridge

The now famous C1 ceramic
Compliance 5.2×10^{-6} cm/dynes
Frequency response 20-15,000 Hz.
 ± 2 dB

Standard UA70 player £12.18.3*

C1 Ceramic Cartridge

sapphire stylus £2. 7.0*
diamond stylus £3. 1.9*

*Inc. P.T. surcharge

WW—072 FOR FURTHER DETAILS



**XLR/EP AUDIO
CONNECTORS**

Widely used Standard Audio/Video series with latch coupling. Up to 18 contacts in 15 shell styles.

**Cannon Electric
(Great Britain) Ltd.,
Lister Road,
Basingstoke, Hants.
Tel: Basingstoke 3171**



CANNON

WW—073 FOR FURTHER DETAILS

**TECHNICAL TRAINING by
ICS IN RADIO, TELEVISION AND
ELECTRONIC ENGINEERING**

First-class opportunities in Radio and Electronics await the ICS trained man. Let ICS train YOU for a well-paid post in this expanding field.

ICS courses offer the keen, ambitious man the opportunity to acquire, quickly and easily, the specialized training so essential to success. Diploma courses in Radio/TV Engineering and Servicing, Electronics, Computers, etc. Expert coaching for:

- * INSTITUTION OF ELECTRONIC AND RADIO ENGINEERS.
- * C. & G. TELECOMMUNICATION TECHNICIANS CERTS.
- * C. & G. SUPPLEMENTARY STUDIES.
- * R.T.E.B. RADIO AND TV SERVICING CERTIFICATE.
- * RADIO AMATEURS EXAMINATION.
- * P.M.G. CERTIFICATES IN RADIOTELEGRAPHY.

Examination Students Coached until Successful.

NEW SELF-BUILD RADIO COURSES

Build your own 5-valve receiver, transistor portable, signal generator and multi-test meter—all under expert tuition.

POST THIS COUPON TODAY and find out how ICS can help YOU in your career. Full details of ICS courses in Radio, Television and Electronics will be sent to you by return mail.

MEMBER OF THE ASSOCIATION
OF BRITISH CORRESPONDENCE COLLEGES.

**INTERNATIONAL
CORRESPONDENCE
SCHOOLS**

**A WHOLE WORLD
OF KNOWLEDGE
AWAITS YOU!**

International Correspondence Schools
(Dept. 222), Intertext House, Parkgate Road,
London, S.W.11.

NAME

ADDRESS

Block Capitals Please

2.67

WW—074 FOR FURTHER DETAILS

WHITELEY

ELECTRICAL RADIO CO. LTD.

HIGH FIDELITY SPEAKERS

Whiteley Stentorian Speakers incorporate 40 years of development in acoustic technology. Their frequency response is exceptionally wide, and their overall performance is outstanding. Few speakers can equal, and none can excel the superb reproduction of the high fidelity speakers in the Whiteley Stentorian range.



Stentorian

MODEL H.F.1016 MAJOR
10" Die-Cast Unit, incorporating 16,000 gauss magnet system and has a 15 ohms impedance speech coil. Handling capacity 10 watts. Frequency response 30-16,000 c.p.s. Bass resonance 39 c.p.s.

PRICE: £11.8.3.

Plus P.T. Surcharge of 3/4d.



Stentorian

MODEL H.F.1012
10" Die-Cast Unit, incorporating 12,000 gauss magnet. Handling capacity 10 watts. Frequency response 30 c.p.s. to 14,000 c.p.s. Bass resonance 35 c.p.s. Fitted with cambric cone and universal impedance speech coil providing instantaneous matching at 3, 7.5 and 15 ohms.

PRICE: £5.11.6.

Plus P.T. Surcharge of 1/7d.



Stentorian

MODEL H.F.816
8" P.M. Unit, 16,000 gauss magnet. Handling capacity 6 watts. Frequency response 50 c.p.s. to 15,000 c.p.s. Bass resonance 63 c.p.s. Fitted with cambric cone, die-cast chassis and universal impedance speech coil providing instantaneous matching at 3, 7.5 and 15 ohms.

PRICE: £7.12.6.

Plus P.T. Surcharge of 2/2d.

Ask your dealer for full details of the Stentorian range or write to

WHITELEY ELECTRICAL RADIO CO. LTD

MANSFIELD · NOTTS · ENGLAND Tel: Mansfield 24762
London Office: 109 KINGSWAY, W.C.2 Tel: HOLborn 3074

WW-075 FOR FURTHER DETAILS

See us at the
1967 R.E.C. show.
23-26th May.

Valradio

TRANSVERTERS

(TRANSISTORISED
D.C. CONVERTERS/INVERTERS)

the D.C. conversion
specialists
since 1935



2 KW. Peak Starting.
750 W. Continuous.
50-60-400 c/s. or D.C.
from 12-24-50v. Battery.

Up to 93% Efficiency. Polarity Reversal Protection. Square or Sinewave. Up to 300% Instant Overload Capacity. Manually Controlled Frequency. Reed Type Indicator. Remote Control Facilities.

Applications: Static "No-Break" Standby Power Supplies; For Vital System(s) Protection, e.g. V.H.F. Transmitters; Industrial Processes; Control-Alarm-Warning Systems; Mobile Use of Counters; Sig./Gen Recorders—U/V Sound; Oscilloscopes and Lab. Gear In Marine and Aircraft (K114).

Range of models available. Please write to department with prices from £11-£94.10.0 C.10 for transverter leaflet

VALRADIO LIMITED


BROWELLS LANE · FELTHAM · MIDDLESEX
ENGLAND Telephone: FELTHAM 4837-4242

Valradio and Stereosonoscope are the registered trade marks of Valradio Ltd.

WW-076 FOR FURTHER DETAILS

COIL WINDING MACHINES

for coils up to 6½" diameter to 6" long. 20-47 S.W.G.

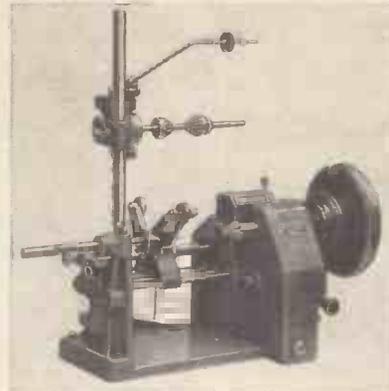

Model "Q" standard.

The feed is fully automatic and the nut is in constant contact with the lead-screw. The reversal of the carriage is obtained by reversing the lead-screw rotation. Two lead-screws are used to give the large range of feeds and a lever on the carriage nut brings either into action. This lever has a neutral position which enables the carriage to be put at any position on the lead-screws. Ball bearing feed wheels are employed. This machine may be fitted for double coil and double end drive, also for "Pyramid Winding."

Enquiries are invited.

ETA TOOL CO. (LEICESTER) LTD.

29A, WELFORD ROAD, LEICESTER. Telephone 56386

WW-077 FOR FURTHER DETAILS



**A-P-T
CASED
TRANSISTOR
UNITS
for
stabilised
output up to
10 amps**

The TCU range of Transistor Stabilised Power Supplies combines outstanding electrical performance with very small size. The units are rated for d.c. outputs of $\frac{1}{2}$ Amp, 1 Amp, 2 Amps, 5 Amps and 10 Amps. The output voltage of each unit is 0-50 Volts, fully variable, and the stabilisation ratio is greater than 1000:1 throughout the range. A comprehensive overload protection circuit gives both immediate current limiting and delayed trip action. Separate input sockets are provided for the control amplifier so that the effect of lead resistance on the performance can be neutralised when the unit is used to supply a remote load. Full details of our complete range will be sent on request.

A-P-T ELECTRONIC INDUSTRIES LTD.


CHERTSEY ROAD, BYFLEET, SURREY

Phone: Byfleet 41131/2/3/4 PABX.


Grams: APTRAN, BYFLEET

Please send me full details of your Transistorised Cased Units.
Please send me details of your full range of products.


NAME _____
COMPANY _____
ADDRESS _____

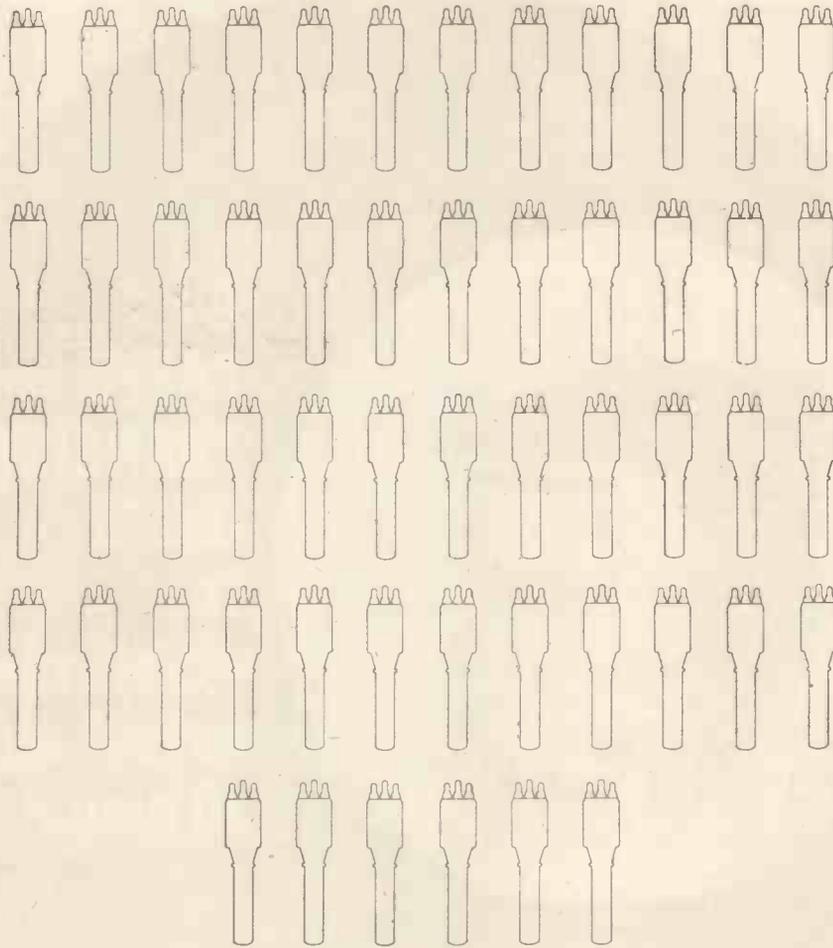

3 > 54

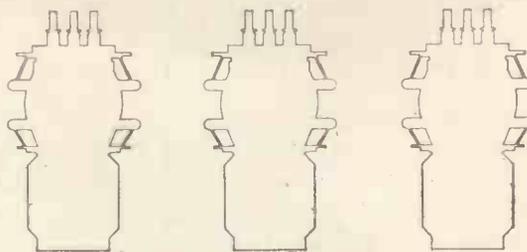

At the GPO transmitting station at Rugby, 3 EEV vapour cooled power triodes (BY1144L) have replaced 54 water cooled triodes (BW173), yet the total power output available is now greater than before. Each BW173 had a maximum output of 10kW; each BY1144L's output is 200kW – an example of how EEV constantly beats the toughest technological challenge. EEV's industrial valves cover the power range from 1kW to 250kW. If you've got an application, EEV can almost certainly supply the valve for the job. If you'd like to know more, write to:



ENGLISH ELECTRIC VALVE COMPANY LIMITED

CHELMSFORD, ESSEX. TELEPHONE: 61777

WW-080 FOR FURTHER DETAILS

AP277

THE VARIAC* variable transformer is the most useful and versatile device ever developed for the control of a.c. voltage, or of current, power, heat, light, speed. It provides smooth continuous adjustment of output voltage from zero to line voltage and above, either hand-operated or motor-driven.

Only Variac has Duratrak*—a patented track surface giving longer life, increased overload and surge capacity and maximum economy in maintenance.

There are over 600 Variac models and assemblies to suit virtually every possible requirement, ranging from small units for laboratory or instrument use to large ganged assemblies for high power 3-phase operation. The range includes low-voltage, high-frequency, dual-output and narrow-range types, open, covered, portable, metalclad and oil-immersed constructions, plus many special models. This is the largest range of variable transformers available today.

The technical superiority and dependability of Variac are the result of over 30 years of development and refinement since the introduction of the first Variac models—the *original* variable transformers.

* 'Variac' and 'Duratrak' are registered trade marks


Variacs are made in England by The Zenith Electric Co. Ltd. London, and exclusively distributed in the U.K., Eire and British Colonies by Claude Lyons Ltd.

Variac

REGD

variable transformers

—over 600 models
to suit every possible
requirement

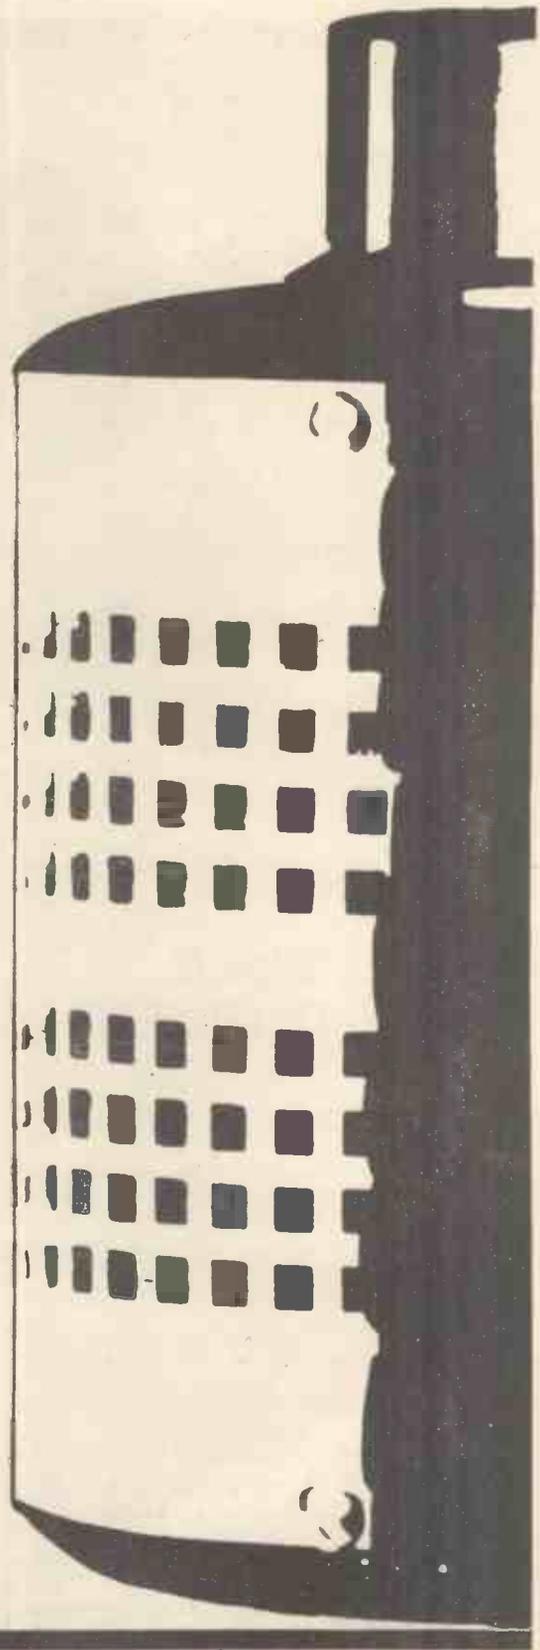


Write for comprehensive catalogue to Publicity Department, Hoddesdon

CLAUDE LYONS LTD

Valley Works, Hoddesdon, Herts Hoddesdon 67161 Telex 22724
76 Old Hall Street, Liverpool 3 MARitime 1761 Telex 62181

CL46

WW—081 FOR FURTHER DETAILS

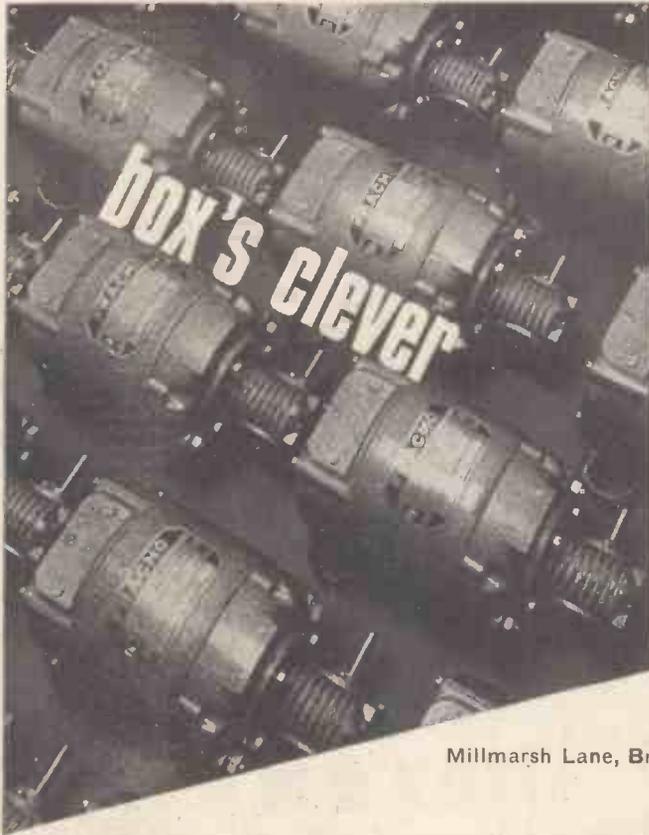


FRACMO

registered trade mark

The Fracmo range of geared motor units has an established reputation for 'always being relied upon.'

Constant speed Induction motor geared units have outputs from 16 oz. in. to 850 lb. in. Speeds from 0.125 to 717 r.p.m. Variable speed commutator motor geared units have outputs from 8 oz. in. to 850 lb. in. Speeds from 0.25 to 750 r.p.m.

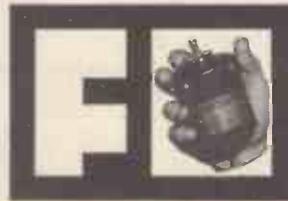

FRACTIONAL H.P. MOTORS LTD.

(A member of the Lindustrles Group)

Millmarsh Lane, Brimsdown, Nr. Enfield, Middlesex. Phone: HOward 4775

Grams and Cables: Fracmo Enfield Middlesex
Telex: 262436

WW-082 FOR FURTHER DETAILS



MUSICAL INSTRUMENTS AND AUDIO

BY G. A. BRIGGS

Published October 1965
240 pages, 212 illustrations. Fine art paper.
Cloth bound 32/6 (34/- post free).

In this book the sixteenth to be produced by the Briggs-Wharfedale set up, attention has been turned to musical instruments as the basis of audio.

Chapters include:

GENERAL PRINCIPLES, VARIOUS SOUND-CAUSE AND EFFECT, CHARACTERISTICS OF INSTRUMENTS, FORMANTS, DISTORTION IN SOUNDS, DISTORTION IN REPRODUCTION, ORGANS, ELECTRONIC ORGANS, PIANOS, TUNING, MUSIC IN SCHOOLS.

Music Industry (Nov.) concludes its review—


"Mr. Briggs comments that this book, his sixteenth for the Wharfedale company has taken a year and a half to complete. It is a year and a half well spent for it must surely become a standard introductory work to the sounds that result from the workings of the music industry".

The following comment was recently received from Philips Electrical Industries of New Zealand Limited "Finally, may we compliment you on your excellent series of publications". Sold by radio dealers, and book shops, or in case of difficulty direct from the publishers.

RANK WHARFEDALE LIMITED
IDLE BRADFORD YORKSHIRE
Tel. Bradford 612552/3 Grams. 'Wharfedale' Bradford.



WW-083 FOR FURTHER DETAILS

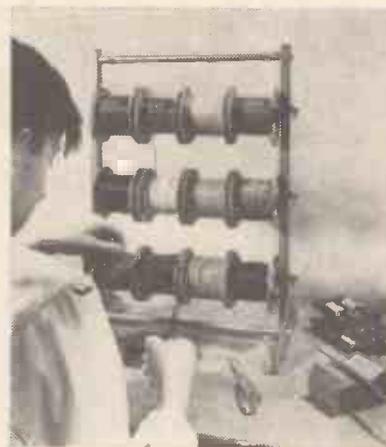

PORTABLE WIRE STAND

SPEEDS PRODUCTION


18 way 56'6
12 way 46'6

Takes standard 100yd. reels. Equally suitable for production or prototype work, and coil winding Reels easily changed. As used by Government departments, leading companies and Universities.

ELLIOTT INSTRUMENTS CO. LIMITED

Bigods Hall, Dunmow, Essex
Tel: Gt. Dunmow 2422

WW-084 FOR FURTHER DETAILS

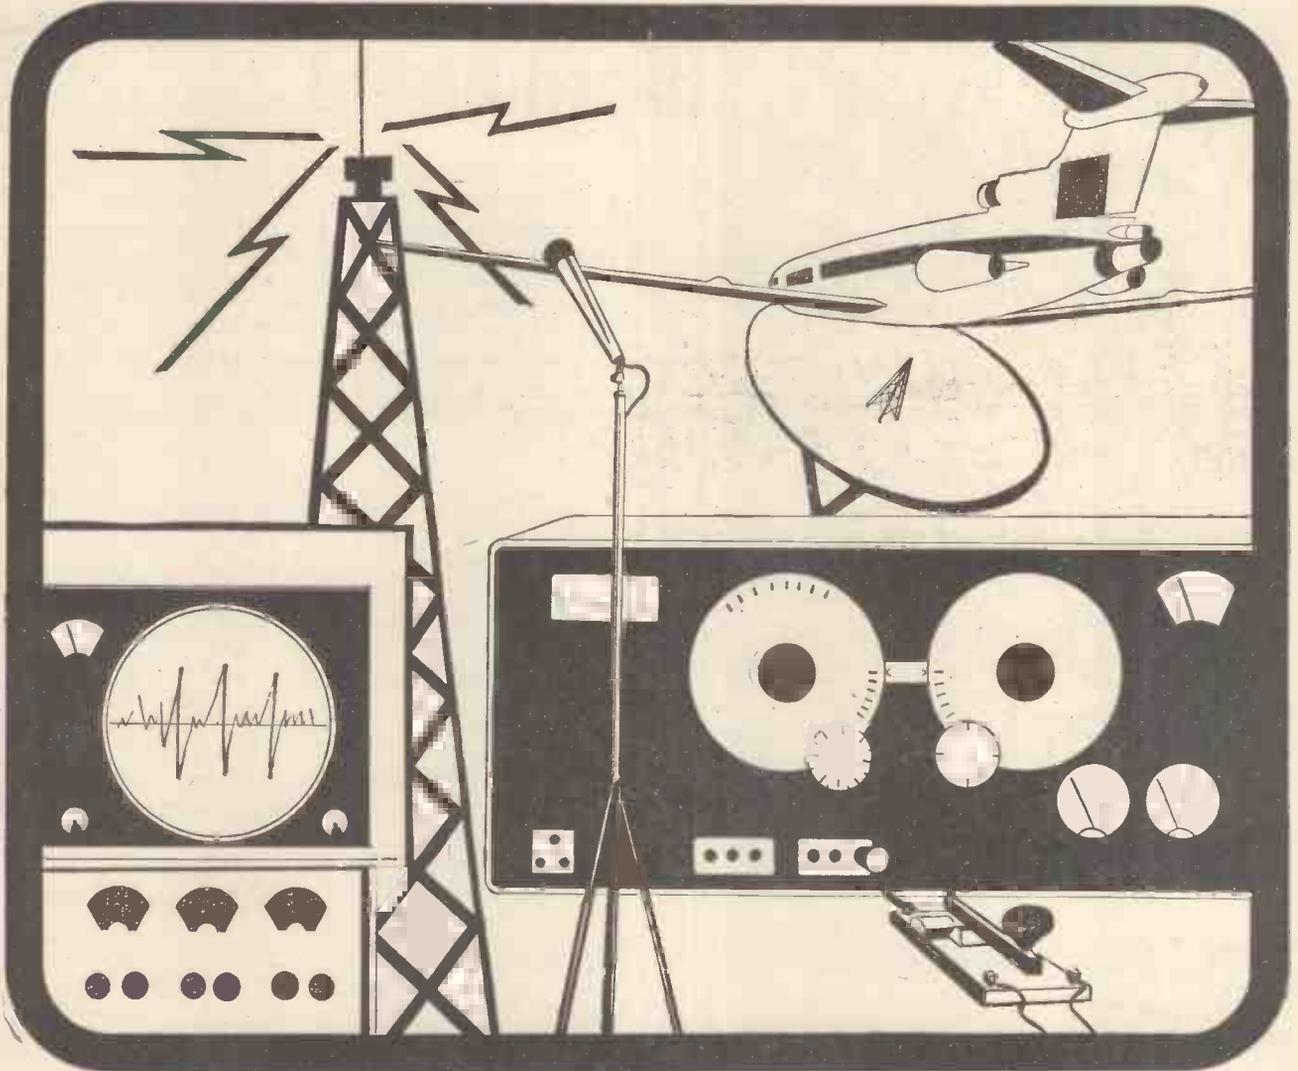

WHERE THE GOING IS TOUGH, THE NEED FOR QUALITY VITAL GOVERNMENTS AGREE ON TEONEX VALVES.

Governments all over the world have chosen TEONEX Valves for vital civil and military roles requiring compliance to E.V.S. or M.I.L. standards. In spite of rising demand for these valves from government departments the world over, increased production facilities have made it possible to offer the TEONEX range (incorporating the entire range of British-produced valves or their Continental equivalents) for use outside the U.K. only.


Price list and technical specifications may be obtained from:—

TEONEX LIMITED

2a Westbourne Grove Mews,
London, W.11
England.



Export Enquiries Only Please!

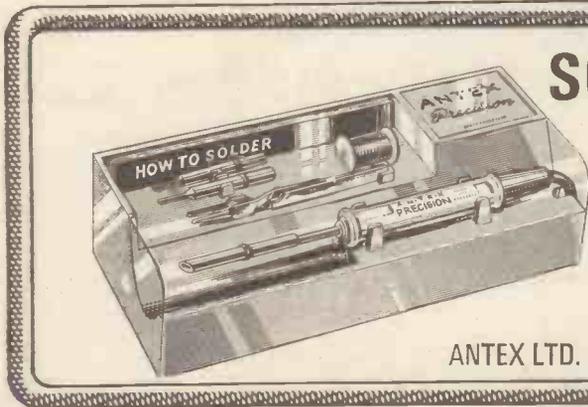

SOLDERING?—the complete answer!

Made by ANTEX—makers of the finest precision soldering irons in the world, this Soldering Kit contains *everything* you need for successful soldering. Unique plastic "tool-box" format (with space for iron stowage *with* plug) keeps everything where you want it.

ANTEX LTD. GROSVENOR HOUSE, CROYDON, SURREY. MUNICIPAL 2774/5

WW—086 FOR FURTHER DETAILS



important titles.....

Magnetic Tape Recording

H. G. M. Spratt, B.Sc. (Eng.), M.I.E.E.

Contents:

Principles of Magnetism; Sound Reproduction and Electro-Acoustics, Principles of Magnetic Recording; Tape Manufacturing Materials; Tape Manufacture; Tape Testing; Tape Recording Machines; Recording and Reproducing Machines; for Music and Speech; Testing of Machines; Application of Magnetic Recording; Present Trends and New Developments.

368 pp. Illustrated 63s. net. 64s. 10d. by post

Transistor Circuit Design and Analysis

E. Wolfendale, B.Sc. (Eng.), M.I.E.E.

This book provides engineers, physicists and undergraduates with a comprehensive introduction to circuit design and analysis and shows how theoretical analysis of circuits and networks can be carried out to enable the final equations to be used in practical circuit design.

292 pp. Illustrated 70s. net. 71s. 3d. by post

Graded Problems for Electrical Engineers

D. W. Hinde, B.Sc., M.I.E.E. and K. M. Smith, A.M.I.E.E.

An important collection of problems for Technical College Courses covering the new National Certificate, Higher National Diploma in Electrical, Mechanical and Chemical Engineering, Electrical Technicians and Electrical Installation.

288 pp. Illustrated 35s. net. 36s. 3d. by post

The Transistor

E. Wolfendale, B.Sc. (Eng.), M.I.E.E.

An introduction to the modern approach to semiconductors, their equivalent circuits, and applications. Mathematical equations are given when they are useful in designing circuits but detailed mathematical analysis has been avoided.

168 pp. Illustrated 40s. net. 41s. 1d. by post


Students paper-backed edition 21s. net. 21s. 10d. by post

obtainable from leading booksellers

ILIFFE BOOKS Ltd DORSET HOUSE STAMFORD STREET LONDON S E 1



WW—087 FOR FURTHER DETAILS

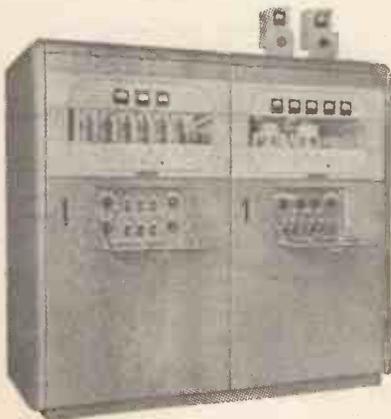

NOW UPGRADE YOUR TRANSMITTER CAPABILITY AT LOW COST!

15 & 50 KW H.F. (4-26 MB) TRANSMITTERS FOR CW, F.S. RTT, ARQ & FACSIMILE FEATURING:

- Linear amplification.
 - Forced air cooled EIMAC 3CX2500A3 tubes.
 - Servo drive mechanisms. Vacuum variable capacitors.
 - With F.S. Keyer, 10 channel crystal-controlled oscillator and variable master oscillator.
 - ISB/SSB/DSB amplification with suitable exciter.
 - Use on 50/60 cycle
 - 600 ohm balanced transmission line output.
 - Spare parts and installation engineering services available.
- Complete technical details on request.

THE MEDITERRANEAN COMMUNICATIONS EQUIPMENT CO. LTD.

P.O. BOX 54, GIBRALTAR

WW—088 FOR FURTHER DETAILS

with the *NEW* Antex **PRECISION SOLDERING KIT**

This is what the ANTEX Kit contains:

- Model CN240 15W Precision Iron with 3/16" bit, (used in electronic workshops and factories all over the world)
- Two spare Interchangeable Bits (5/32" and 3/32")
- Reel of resin-cored Solder
- Handy Heat Sink 1 Cleaning Pad

BRING YOUR WORKSHOP UP-TO-DATE with the new ANTEX KIT

From electrical & radio shops, or if unobtainable locally apply direct to —

49'6

PLUS 36-page booklet on "How-to-Solder"—a mine of information for amateur and professional.

ANTEX LTD. GROSVENOR HOUSE, CROYDON, SURREY. MUNICIPAL 2774/5

WW-089 FOR FURTHER DETAILS



Discover them at the
AUDIO FAIR
HOTEL RUSSELL
MARCH 30-APRIL 2

DEMONSTRATION
ROOM 147 (1st Floor)
STAND NO. 32

EMISOUND SPEAKERS · EMITAPE · EMI TAPE RECORDERS

WW-090 FOR FURTHER DETAILS


NOMBREX TRANSISTORISED INSTRUMENTATION

- ★ Signal Generator 27 £10.16.9
- ★ Power Supply Unit 61 £6.14.6
- ★ C.R. Bridge 62 £9. 6.9
- ★ Audio Generator 63 £17. 1.9
- ★ Inductance Bridge 66 £18. 6.9


All prices include battery, post and packing. Prompt Delivery.

S.A.E. FOR TECHNICAL LEAFLETS

TRADE & EXPORT ENQUIRIES INVITED

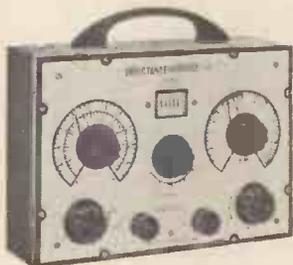

INDUCTANCE BRIDGE MODEL 66

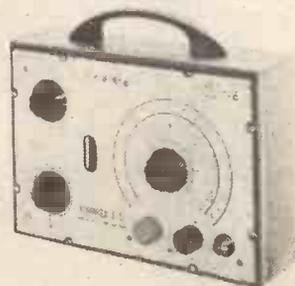

C. R. BRIDGE MODEL 62

NOMBREX LTD. ESTUARY HOUSE, CAMPERDOWN TERRACE, EXMOUTH, DEVON. Phone: 3415

WW-091 FOR FURTHER DETAILS



BERCO REGAVOLTS

EUROPE'S MOST COMPREHENSIVE RANGE
OF VARIABLE TRANSFORMERS

OVER **300** MODELS

with trouble free brush gear

With more than 30 years experience in toroidal winding, Berco have built up the most comprehensive range of variable transformers in Europe. Designed to meet every industrial and laboratory application, the Regavolt range covers over 300 models — providing smooth, infinitely variable, reliable control (from zero to line voltage and above) of POWER—HEAT—LIGHT—MOTOR SPEED etc. Supplied for single and three phase supplies, Hand Operated or Motor Driven.

Current ratings range from 0.5 to 127 amps. per phase.

For further information send for new illustrated List No. MT /625 to:—

THE BRITISH ELECTRIC RESISTANCE CO. LTD.

QUEENSWAY · ENFIELD · MIDDLESEX



Tel: HOWard 2411
Grams: Vitrohm
Enfield

31B

WW—092 FOR FURTHER DETAILS

minitest MULTI-RANGE TEST SET

50uA movement 20,000 ohms per volt

for only **£7.17.6.** (Trade price)

(with leather case £8.15.2)

LOOK AT THESE FEATURES

- * D.C. sensitivity 20,000 ohms per volt
- * A.C. sensitivity 2,000 ohms per volt
- * D.C. accuracy $\pm 2\frac{1}{4}\%$ F.S.D.
- * A.C. accuracy $\pm 2\frac{3}{4}\%$ F.S.D.
- * A.C. accuracy maintained up to 20 kc/s
- * Additional decibel scale
- * Small size $5\frac{3}{4}'' \times 3\frac{3}{4}'' \times 2\frac{1}{8}''$
- * Weight 18 ozs. * 20 ranges

Fits into the pocket. The Salford Minitest, a highly sensitive test meter for the measurement of A.C. and D.C. volts, current and resistance. The clarity of the scale is exceptional and the knife edge pointer ensures accurate reading. Housed in a tough Melamine cover, the movement is built into a pressed steel case which effectively screens it from external magnetic fields.

MINITEST	D.C. Amps	D.C. Volts	A.C. Volts	All ranges
	0 - 1 Amp.	0 - 1,000	0 - 1,000	are selected by
	0 - 100 mA.	0 - 250	0 - 250	a single twelve-
0 -	2,000 0 - 10 mA.	0 - 100	0 - 100	position rotary switch.
0 -	200,000 0 - 1 mA.	0 - 25	0 - 25	A separate slide switch is
0 - 20 Megohms	0 - 50 uA.	0 - 10	0 - 10	provided to change over from
		0 - 2.5	0 - 2.5	A.C. to D.C. ranges.



SEI

SALFORD ELECTRICAL INSTRUMENTS LIMITED


Peel Works · Barton Lane · Eccles · Tel: ECCles 5081 · Telex: 66711
London Sales Office: Brook Green, Hammersmith W.6. Tel: 01 - 603 9292
A Subsidiary of THE GENERAL ELECTRIC COMPANY LTD OF ENGLAND

S.E.C.

Leaflet
on
request.

WW—093 FOR FURTHER DETAILS

What's happening at Newmarket—in micro-circuits? Specialisation in custom-built micro-circuits for 100 to 10,000 requirements

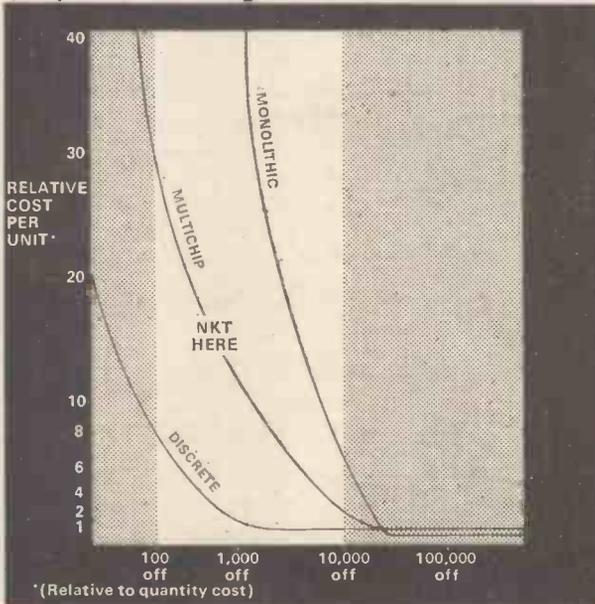

Look at this graph. It compares the cost of multichip and monolithic with discrete-component circuits. If you have a specialist micro-circuit requirement, which cannot be met by standard, off-the-shelf monolithic circuits, then a custom-built multichip circuit is your best buy. Below 100 use discrete. Above 10,000 think seriously of a monolithic. Between those limits, think of multichip and Newmarket. We are specialising in custom-built multichip circuits.

Write or telephone to discuss your circuit with our development engineers.

Newmarket
TRANSISTORS LIMITED

Exning Road,
Newmarket, Suffolk.
Telephone
Newmarket (ONE 8) 3381

Industrial
SEMICONDUCTOR DEVICE MANUFACTURERS AND SOLID STATE ENGINEERS
WW-094 FOR FURTHER DETAILS

r RADFORD

AUDIO LABORATORY INSTRUMENTS

LOW DISTORTION OSCILLATOR (Series 2)

An instrument of high stability providing very pure sine waves, and square waves, in the range of 5 Hz to 500 kHz. Hybrid design using valves and semiconductors.

Specification

Frequency coverage: 5 Hz-500 kHz (5 ranges)
Output impedance: 600 Ohms.
Output Voltage: 10 Volts r.m.s. max.
Output Attenuation: 0-110 dB continuously variable.
Sine Wave Distortion: 0.005% 200 Hz-20 kHz increasing to 0.015% 10 Hz-100 kHz.

Square Wave Rise Time: Less than 0.1 microseconds
Monitor Output Meter: Scaled 0-3, 0-10, and dBm.
Mains Input: 100 V.-250 V. 50/60 Hz.
Size: 17½ x 11 x 8in.
Weight: 25 lbs.
Price: £125.
Rack mounting version available.

DISTORTION MEASURING SET (Series 2)

A sensitive instrument for the measurement of total harmonic distortion, designed for speedy and accurate use. Capable of measuring distortion products as low as 0.002%. Direct reading from calibrated meter scale.

Specification

Frequency Range: 20 Hz-20 kHz (6 ranges)
Distortion Range: 0.01%-100% f.s.d. (9 ranges)
Sensitivity: 100 mV.-100 V. (3 ranges)
Meter: Square law r.m.s. reading.
Input Resistance: 100 kOhms.
High Pass Filter: 3 dB down at 350 Hz.
30 dB down at 35 Hz.

Frequency Response: ±1 dB from second harmonic of rejection frequency to 250 kHz.

Power Requirements: Included battery.
Size: 17½ x 11 x 8in.
Weight: 15 lbs.
Price: £90.
Rack mounting version available.

VOLTMETER (new item)


A transistor operated voltmeter satisfying the requirements for audio frequency measurement.

Specification

Sensitivity: 1 mV.-300 V. f.s.d. (12 ranges)
Calibration Accuracy: 2% f.s.d.
Frequency Response: ±1 dB, 10 Hz-500 kHz.
Input Impedance: 1 MOhm. 1 mV.-300 mV.
10 MOhm. 1 V.-300 V.

Meter Scaled: 0-3, 0-10, and dBm.
Power Requirements: Included battery.
Size: 11½ x 6½ x 6in.
Weight: 7 lbs.
Price: £35.


RADFORD ELECTRONICS LTD
Ashton Vale Road
Bristol 3

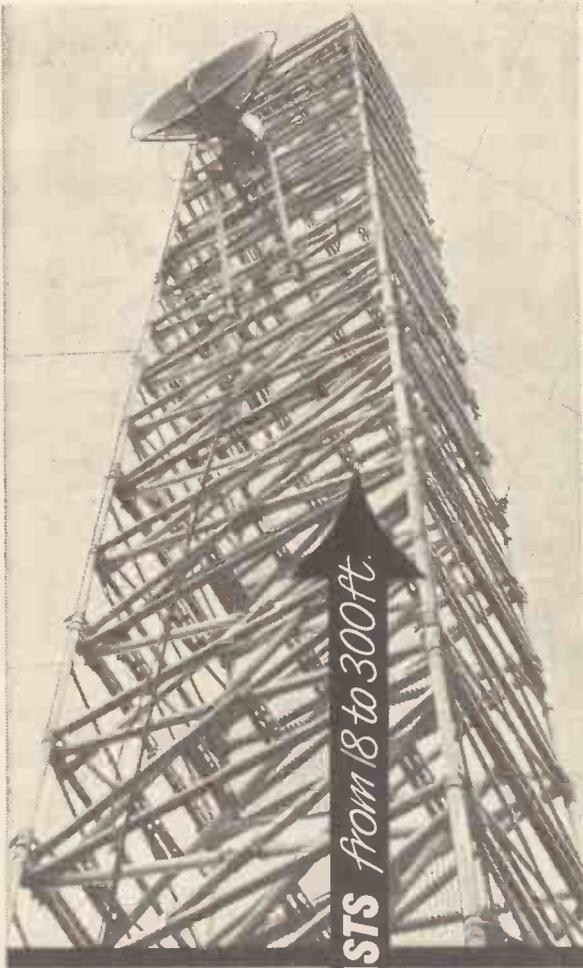

Quickly erected (300 ft. in 6 hours) for temporary links, emergency communication, outside broadcasts and survey. Interchangeable one-piece folding tower sections fit one on top of the other and include enclosed stairway with platforms, ensuring safety at heights even for the inexperienced. Each section weighs only 100 lbs. No elaborate base required. Air transportable. Weatherproof - all aluminium - and thoroughly tested in the field. In regular use, in snow and sun, in all continents.

Write for folder

PORTABLE ALUMINIUM MASTS from 18 to 300ft.

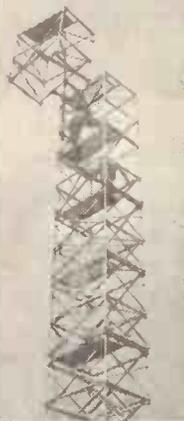

Sections are assembled at ground level and installed at mast top without tools.




ACCESS EQUIPMENT LTD

Maylands Avenue, Hemel Hempstead, Herts.
Hemel Hempstead (OHH2) 2311

WW-096 FOR FURTHER DETAILS

—Record it...and—
hear the play-back
simultaneously
on the Brenell Mk5M

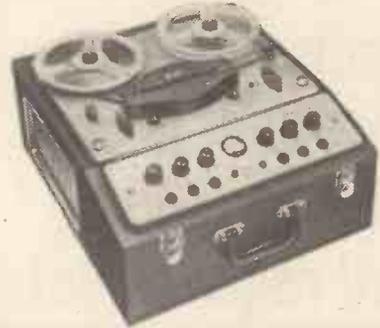

—and be sure it sounds superb!

Write for illustrated leaflet WW2



BRENELL ENGINEERING CO. LTD.,
231-5 Liverpool Road, London, N.1
Telephone: NORth 8271 (5 lines)

WW-097 FOR FURTHER DETAILS

MICROPHONES

their accessories

TRANSISTOR SOUND

and

“RADIOMIC” EQUIPMENT

top ranking quality for top ranking performance.

Full particulars from:

LUSTRAPHONE

St. George's Works, Regent's Park Road,
London, N.W.1 Tel: PRImrose 8844

WW-098 FOR FURTHER DETAILS

TRANSFORMERS

COILS

LARGE OR SMALL QUANTITIES

CHOKES

TRADE ENQUIRIES WELCOMED

SPECIALISTS IN

FINE WIRE WINDINGS

MINIATURE TRANSFORMERS
RELAY AND INSTRUMENT COILS, ETC.
VACUUM IMPREGNATION TO APPROVED STANDARDS

ELECTRO-WINDS LTD.

CONTRACTORS TO G.P.O., A.W.R.E., L.E.B., B.B.C., ETC.
123-5-7 PARCHMORE ROAD, THORNTON HEATH, SURREY
LIVINGSTONE 2261 EST. 1933

WW-099 FOR FURTHER DETAILS

HOWELL'S RADIO LTD.

MINISTRY OF AVIATION INSPECTION APPROVED

TRANSFORMERS
STANDARD RANGE OR DESIGNED TO YOUR SPECIFICATION
0-50KVA, "C" CORE, PULSE, 3 PHASE, 6 PHASE, TOROIDS ETC.

Driver and Mains Transformer for 20W transistor Amplifier (W.W. Nov. 1966).

Driver 22/6 Carr. 2/-
Mains 25/6 Carr. 4/6

***HEATER TRANSFORMERS**

6.3 v. 1.5 A. 9/6. Carr. 2/-.
6.3 v. 3A 13/- Carr. 2/6

***MAINS TRANSFORMERS**

350-0-350 v. 60 mA., 6.3 v. 2 A. £1/15/- Carr. 4/6.
500 v. 300 mA. 6.3 v. 4 A., 6.3 v. 1 A. £3/12/6 Carr. 5/6.
500-0-500 v. 0.25 A., 6.3 v. 4 Act., 6.3 v. 3 Act., 5 v. 3 A. £4/10/6.
Carr. 6/6.
525-0-525 v. 0.5 A., 6.3 v., 6 Act., 6.3 v., 6 Act., 5 v. 6 A. £5/5/-.
Carr. 6/6.

***LOW VOLTAGE**

30-0-30 v. 4 A. £2/5/6 Carr. 5/6
15 v. 2 A. £1/12/6 Carr. 3/-.
15 v. 6 A. £2/1/- Carr. 4/6.
15 v. 10 A. £2/15/- Carr. 5/6.

STEP DOWN TRANSFORMER

Primary 0-415-440 v. Sec. 250 v. 1.5 A. £5/5/- Carr. 6/6.

***PRIMARIES 10-0-200-220-240 v.**

CHASSIS, CABINETS AND PRECISION METALWORK

ELECTRONICS — DEVELOPMENT AND ASSEMBLY

**Carlton Street
Manchester 14
Lancashire**

Tel: 2263411 & Trunk dialling 061

WW-100 FOR FURTHER DETAILS



PRECISION PRESSINGS

Accurate components at competitive prices

produced by progressive tooling and multiform methods




JOHN SMITH LTD.

209 SPON LANE · WEST BROMWICH · STAFFS TELEPHONE: WES 2516 (3 lines)
WOODS LANE · CRADLEY HEATH · STAFFS TELEPHONE: CR 69283 (3 lines)

WW-101 FOR FURTHER DETAILS

ADCOLA
PRODUCTS LIMITED
(Regd Trade Mark)

SOLDERING EQUIPMENT

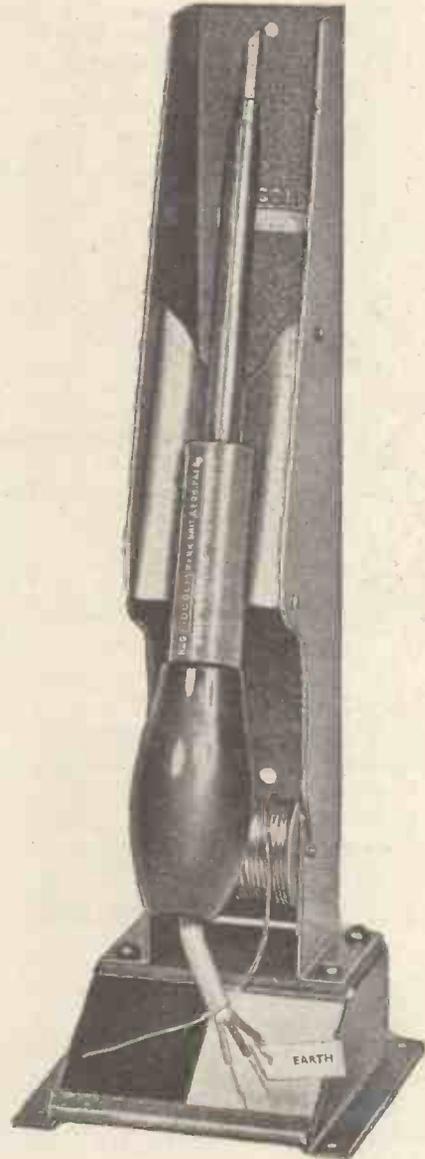

FOR FULL INFORMATION

Apply Direct to:

ADCOLA PRODUCTS LTD.
ADCOLA HOUSE
GAUDEN ROAD
LONDON, S.W.4

Telephone:
MACaulay 0291/3

Telegrams:
SOLJOINT LONDON S.W.4

NEW!


The safest, quick and handy connector for electrical appliances

MAINS Keynector

meets an essential need

Measuring only 5in. x 3in. x 1½in. the MAINS KEYNECTOR is made of non-combustible urea-formaldehyde. Designed in modern style and manufactured in attractive two-tone colour. The unit eliminates the need of terminating the mains input lead of any electrical instrument or appliance with a plug. It also enables more than one instrument or appliance to be connected in parallel and used simultaneously. In industry it will be appreciated by electrical/electronic instrument and appliance manufacturers, where speed in testing is essential.

Colour: Duo-Green. **32/6** inc. p.p.
British and Foreign Patents applied for.

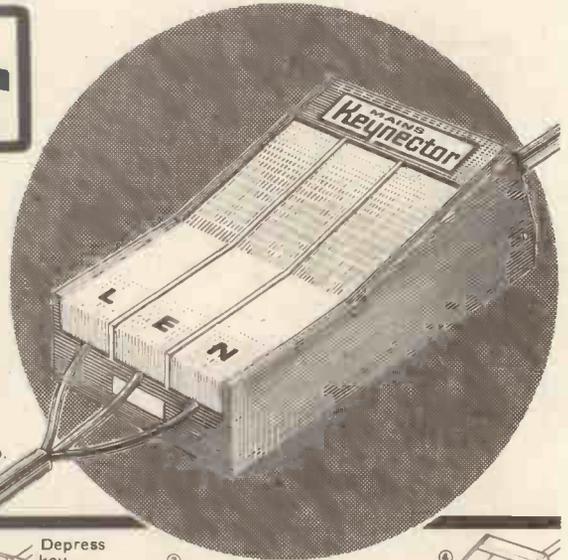

HOW IT OPERATES




CYBERNAUT CONTROLS LTD., 28-30 Rivington St., London, E.C.2. Tel: 01 739-2763.
WW-102 FOR FURTHER DETAILS

NORMA VIENNA

- ★ 40 RANGES FOR:—
- D.C. CURRENT & VOLTAGE
- A.C. CURRENT & VOLTAGE TO 30 kc/s
- RESISTANCE TO 5 MEGOHMS
- TEMPERATURE
- OUTPUT

- ★ Accuracy of 2.5% D.C. 3.5% A.C. to 500 c/s
- ★ Sensitivity of 20,000 Ohms/volt D.C. 4,000 Ohms/volt A.C.
- Robust Taut suspended Meter Movement
- AVAILABLE FROM:—

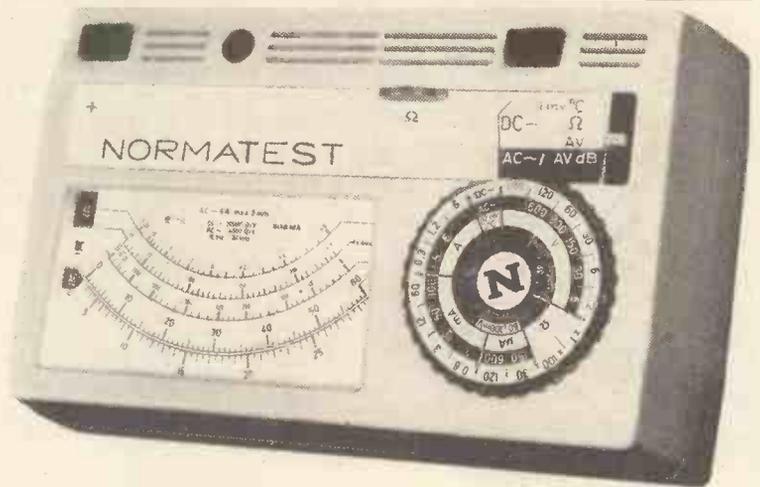

NORMATEST MODEL 785

PRICE £11-10-0

The newest small Multirange Meter obtainable with a specification comparable to standard-size multirange meters.
Ex Stock

CROYDON PRECISION INSTRUMENT COMPANY
HAMPTON ROAD · CROYDON · SURREY Telephone THORNTON HEATH 4025 & 4094

WW-103 FOR FURTHER DETAILS

They look good, they sound good,
and, by golly



They are good!


Designers and manufacturers of automatic tape players, electronic church bells, loudspeakers, multi-unit language laboratories, pre-recorded tape programmes, schools sound systems, tape and disc decks, transistorised mains/battery amplifiers, transistorised mixer units, etc., etc.

SEND FOR FULL DETAILS OF OUR RANGE OF SOUND REINFORCEMENT LOUDSPEAKERS AND TRANSISTOR AMPLIFIERS.

**sound
coverage
limited**

Decibel House, Wellington Town-Road, East Grinstead, Sussex.
Telephone: East Grinstead 21332-3

workmanship

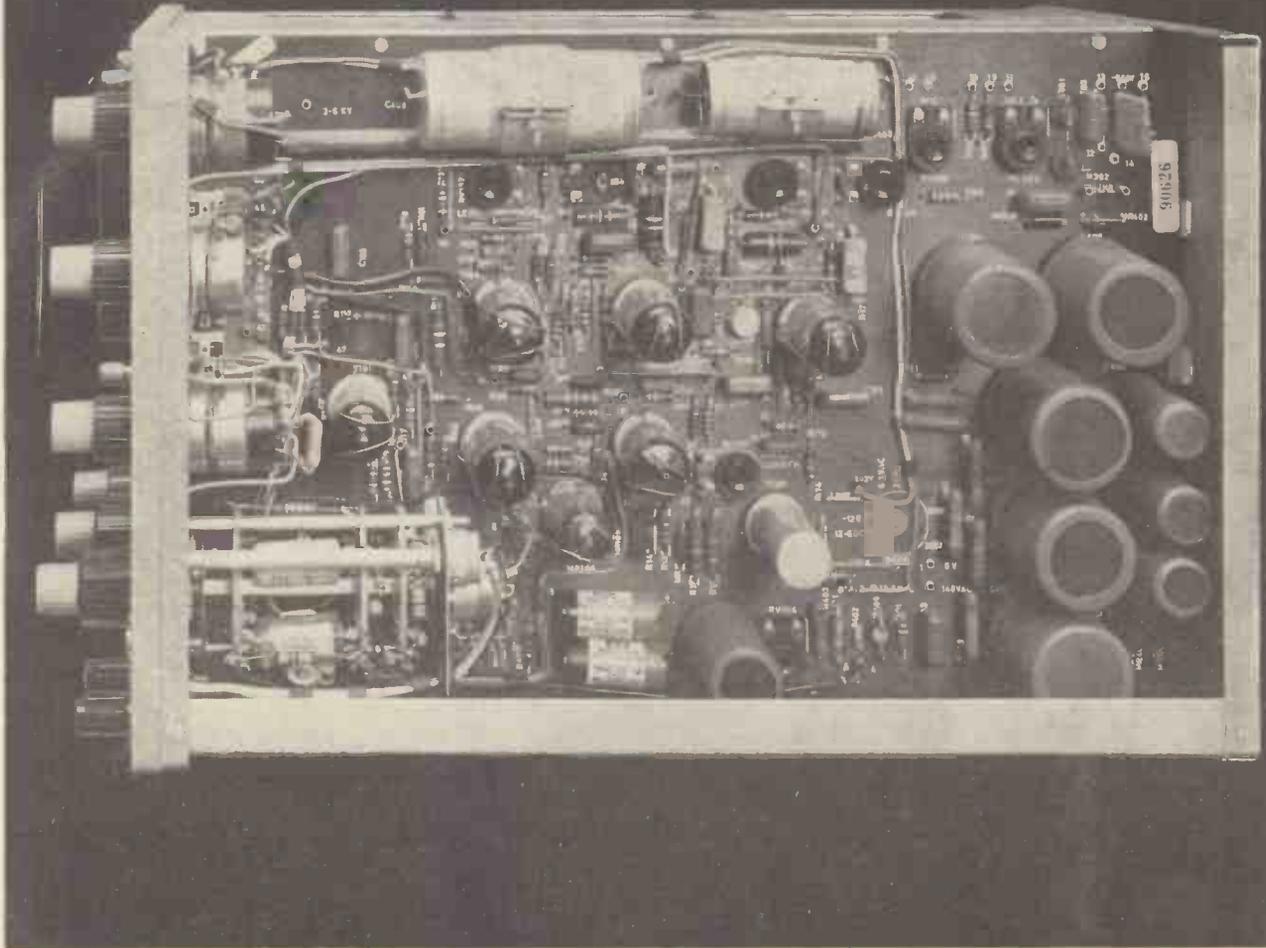

No sealed-off secrets inside a Telequipment oscilloscope . . . it's all good practical engineering. Compact as they are, every model is simply and soundly constructed for efficient operation and easy servicing. From specially developed tube with bright linear display to individually tested components—every detail in a Telequipment 'scope must meet the same high standard. There's no secret about Telequipment 'Tracemanship', just skill in design and . . . workmanship. See for yourself!

Illustrated is the type D52 double-beam Serviscope—£99. Send for a short form catalogue of the complete range.*



*Serviscope is a registered trade mark of

Telequipment Limited · 313 Chase Road · Southgate · London · N.14 · Fox Lane 1166

WW—105 FOR FURTHER DETAILS

Wireless World

ELECTRONICS, TELEVISION, RADIO, AUDIO

MARCH 1967

Editor-in-chief:

W. T. COCKING, F.I.E.E.

Editor:

H. W. BARNARD

Technical Editor:

T. E. IVALL

Editorial:

B. S. CRANK

F. MILLS

G. B. SHORTER, B.Sc.

Drawing Office:

H. J. COOKE

Production:

D. R. BRAY

Advertisements:

G. BENTON ROWELL

(Manager)

J. R. EYTON-JONES

Iliffe Electrical Publications Ltd.,

Chairman: W. E. Miller,

M.A., M.I.E.R.E.

Managing Director:

Kenneth Tett

Dorset House, Stamford Street,
London, S.E.1

© Iliffe Electrical Publications Ltd., 1967. Permission in writing from the Editor must first be obtained before letterpress or illustrations are reproduced from this journal. Brief extracts or comments are allowed provided acknowledgement to the journal is given.

VOLUME 73 No. 3

PRICE: 3s.

FIFTY-SIXTH YEAR
OF PUBLICATION

- | | | |
|-----|---|-------------------|
| 105 | The Wisdom of the Specialist | |
| 106 | A Million Spots Before Your Eyes | by T. D. Towers |
| 114 | Amateur S.S.B. Transmitter | by C. J. Salvage |
| 119 | Trojan Relays | by J. Strong |
| 122 | Design of Schmitt Trigger Circuits | by A. E. Crump |
| 132 | Tracking Russian Satellites | by G. E. Perry |
| 135 | Point-to-Point Review, 1966 | by D. Wilkinson |
| 136 | Common-Frequency Radio Relaying | by J. R. Brinkley |
| 143 | Battery Eliminator for Transistor Receivers | by R. F. Cook |

SHORT ITEMS

- | | |
|-----|--------------------------------------|
| 111 | Lithium Tantalate Optical Modulators |
| 112 | Communal Broadcasting Service |
| 131 | Travelling-Field Function Generators |
| 131 | Bio-Engineering Show |
| 149 | Public Address Show |

REGULAR FEATURES

- | | | | |
|-----|---------------------------------|-----|--------------------------------|
| 105 | Editorial Comment | 134 | Books Received |
| 112 | World of Wireless | 138 | Letters to the Editor |
| 127 | H.F. Predictions | 144 | New Products |
| 128 | Personalities | 149 | Literature Received |
| 130 | News from Industry | 150 | March Meetings |
| 134 | March Conferences & Exhibitions | 152 | Real and Imaginary by "Vector" |

PUBLISHED MONTHLY (3rd Monday of preceding month). Telephone: Waterloo 3333 (70 lines). Telegrams/Telex: Wiworld Iliffepres 25137 London. Cables: "Ethaworld, London, S.E.1." Annual Subscriptions: Home: £2 6s Od. Overseas: £2 15s Od. Canada and U.S.A.: \$8.00. Second-class mail privileges authorised at New York N.Y. BRANCH OFFICES: BIRMINGHAM: 401, Lynton House, Walsall Road, 22b. Telephone: Birchfields 4838. BRISTOL: 11, Marsh Street, 1. Telephone: Bristol 21491/2. COVENTRY: 8-10, Corporation Street. Telephone: Coventry 25210. GLASGOW: 123, Hope Street, C.2. Telephone: Central 1265-6. MANCHESTER: 260, Deansgate, 3. Telephone: Blackfriars 4412. NEW YORK OFFICE U.S.A.: 300 East 42nd Street, New York 10017. Telephone: 867-3900.

low priced silicon planar devices

READILY AVAILABLE
IN LARGE
QUANTITIES!

Miniature Silicon Planar Switching Diodes

High-speed switching, low-capacity diodes for computer and general industrial applications.

1N4148
1N4154

ACTUAL SIZE

Silicon NPN Planar Epoxy Transistors

Low-noise pre-amplifiers.

2N3391A
BC150

General purpose DC and low frequency amplifiers and oscillators.



2N3391
2N3393
2N3394
2N2923
2N2924
2N2925
2N2926
BC151

BRIMAR

Silicon NPN Planar Epitaxial Epoxy Transistors

Audio and relay driver applications and switching circuits.

$V_{CE0 \text{ max}}$ from 25 to 50V.

2N3402
2N3404
2N3414
2N3416
BC152
BC175
BC180



VHF/RF types suitable for entertainment and communications AM or FM receivers.

BF216
BF217
BF218
BF219
BF220

Brimar can offer immediate delivery of a range of Silicon Planar Devices – produced for the first time in Great Britain in their new Silicon Planar plant at Brimsdown. The range includes transistors and diodes suitable for industrial and electronics applications. Thyristors are also available. Made to uncompromising standards, they are readily available in large quantities at the keenest prices. Ask for technical details and descriptive literature. Manufacturers' enquiries only, please – to:




TA5604

Thorn - A.E.I. Radio Valves & Tubes Limited

7 Soho Square, London W.1. Telephone: GERrard 5233



WW-106 FOR FURTHER DETAILS

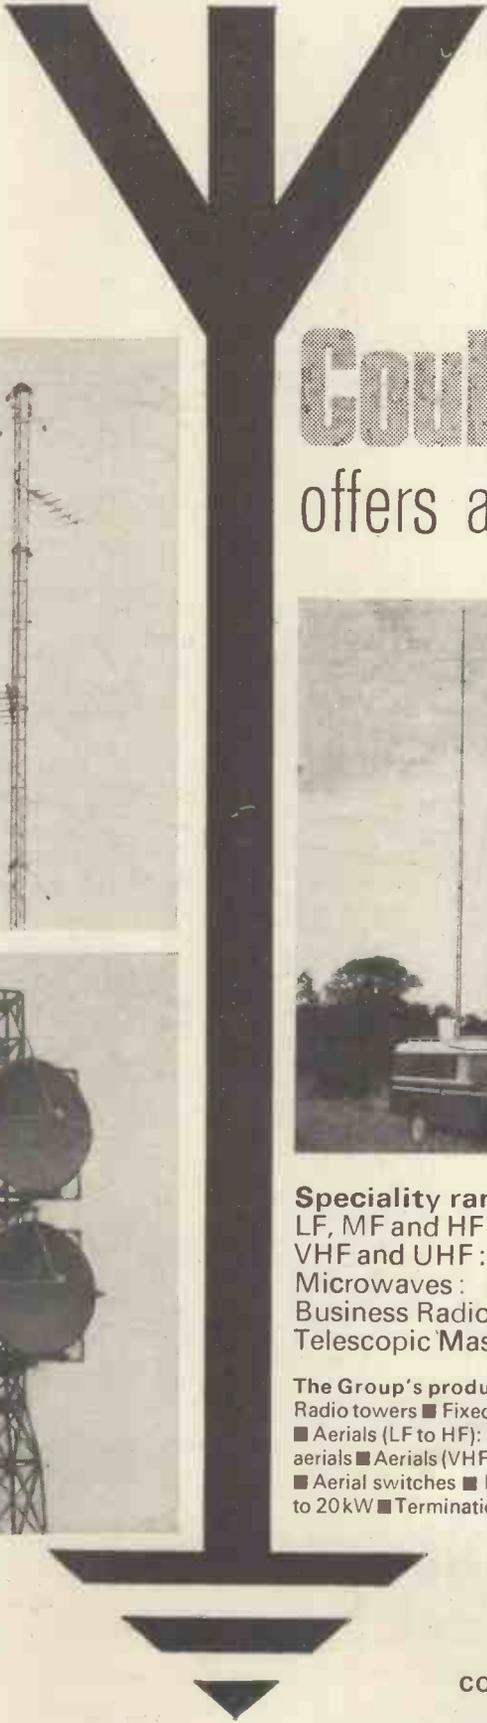

Coubro & Scrutton

offers a complete aerial service

(LF to Microwaves)

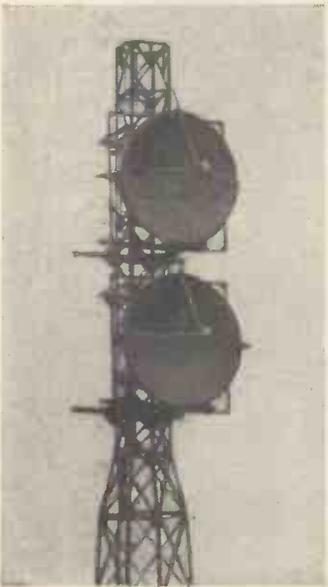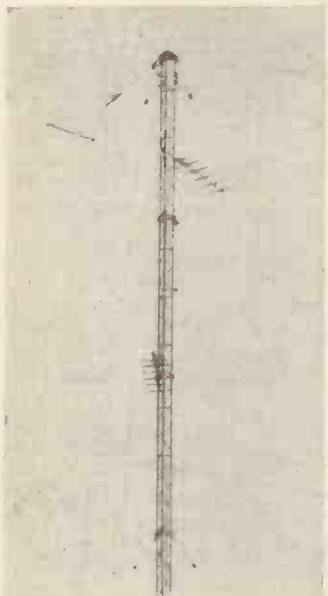

**BROADCASTING
POINT TO POINT
GROUND TO AIR
NAVIGATIONAL AIDS
MARINE AERIALS
MAST AND AERIAL
INSTALLATIONS IN
OVER 200 COUNTRIES**

Speciality ranges of the Coubro & Scrutton Companies

LF, MF and HF: Coubro and Scrutton Ltd.

VHF and UHF: Associated Aerials Ltd.

Microwaves: Precision Metal Spinings Ltd.

Business Radio: R. T. Masts Ltd.

Telescopic Masts: A. N. Clark (Engineers) Ltd.

The Group's products and services include:


Radio towers ■ Fixed, portable and telescopic masts ■ Co-axial and open-wire feeders
 ■ Aerials (LF to HF): rhombics, log periodics, dipoles, quadrants, 'T'-aerials, wide-band
 aerials ■ Aerials (VHF to microwave): yagis, ground plane, helices, dipoles, dishes. Filters.
 ■ Aerial switches ■ Lead-in panels ■ Earth systems ■ Air-cooled transmitter loads up
 to 20kW ■ Termination networks ■ Propagation surveys ■ Site layouts and installation.

COUBRO & SCRUTTON LTD, 430 Barking Road, London, E13

Cables: Coubro London E13 · Telex 25850 · Tel: ALBERT Dock 4477

MODEL 633

Guaranteed for 3 years

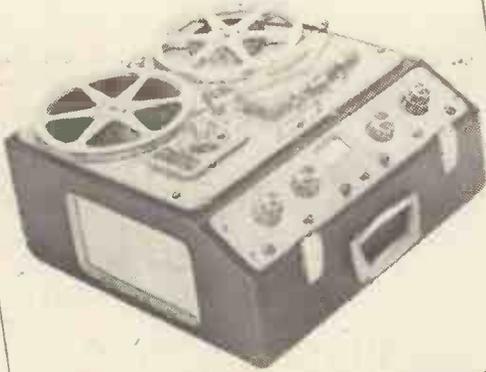

An instrument for the connoisseur...
Designed to a strict specification
Built to endure

- * Three operational speeds:
633— $1\frac{7}{8}$, $3\frac{3}{4}$ and $7\frac{1}{2}$ i.p.s.
633H— $3\frac{3}{4}$, $7\frac{1}{2}$ and 15 i.p.s.
- * Monitoring of recorded programme.
- * Comparison by "A-B" switching.
- * Switched bias control.
- * Level meter reads on both record and playback.
- * Mixing facilities with separate gain controls.
- * Modular construction to provide maximum service accessibility.
- * Separate record and replay heads.
- * Separate record and replay amplifiers.
- * Fully compensated input socket for magnetic pick-up.
- * Spot erase.
- * 3 watts undistorted output.

Model 633 120 gns.
Model 633H 125 gns.

Ferrograph

the incomparable tape recorder

The 633 is the latest addition to the Ferrograph range and is intended for the serious home recorder as well as the professional user. Each instrument is supplied with an abstract of actual performance in the form of a test certificate. Spare parts—as with all Ferrograph instruments—are guaranteed available for at least 10 years.

Interested? Then complete and post this coupon to:
THE FERROGRAPH CO. LIMITED
84 Blackfriars Road, London, S.E.1.


- Please send me the FREE illustrated Ferrograph leaflets.
- Please send me the comprehensive 64-page model 633 Ferrograph Manual, for which I enclose £1—refundable when I purchase my Ferrograph.
(Tick items required in box at left)

NAME _____

ADDRESS _____

WW10



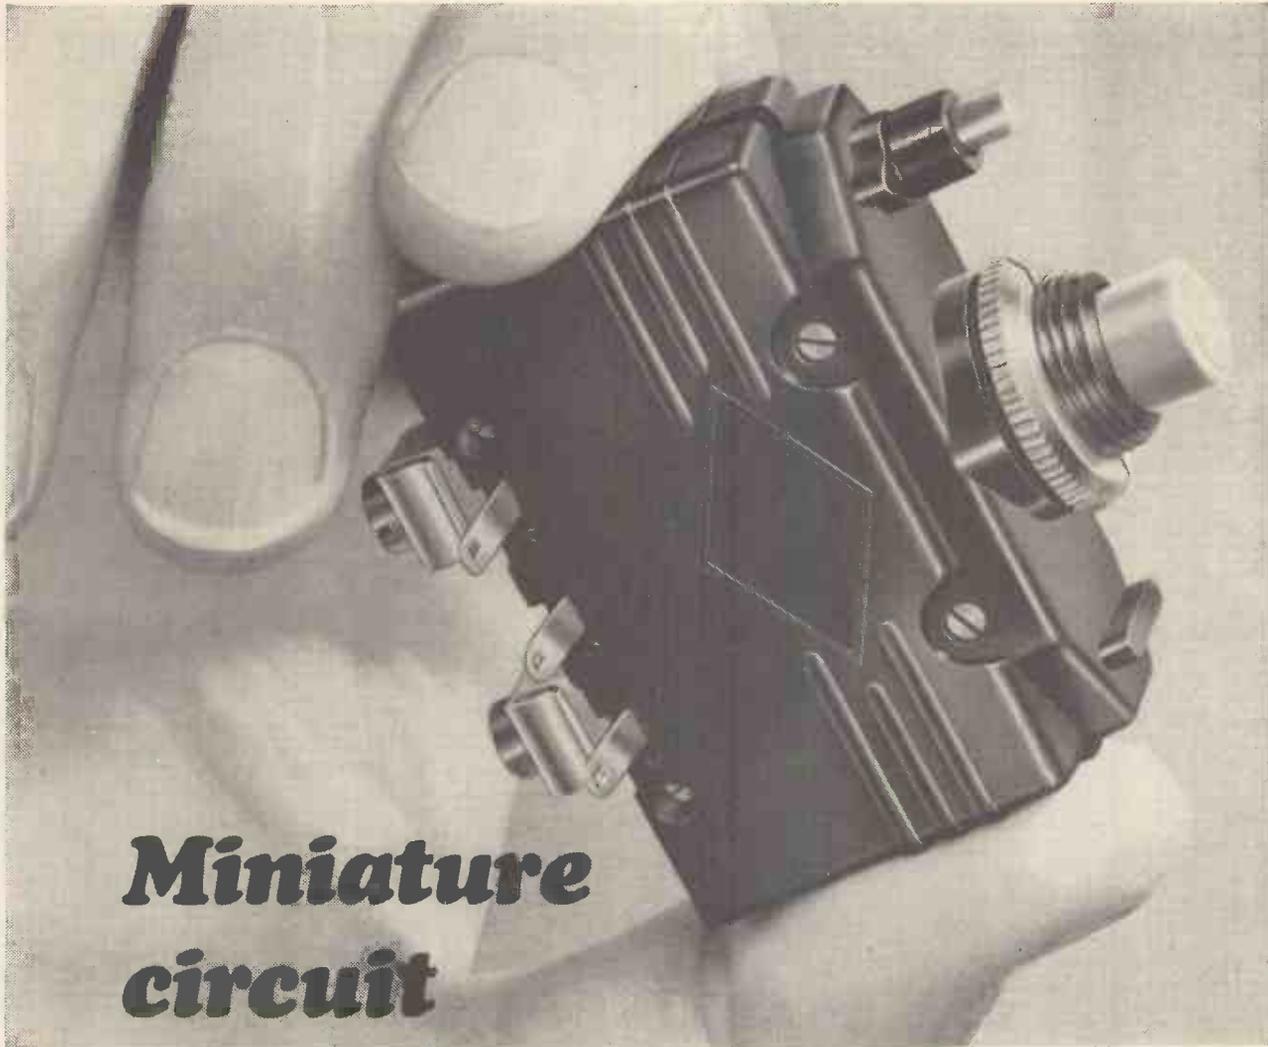

**Miniature
circuit
breakers
with BIG
Advantages**

The Belling-Lee "Securex" Miniature Circuit Breaker is a precision unit which provides protection, switching plus a clear indication of the circuit condition. Two basic types are available, thermal or thermal-magnetic. Available in many ratings from 300 mA to 15 A.

FOR FULL SPECIFICATIONS RING ENF 5393
OR WRITE FOR DATA SHEETS E17-E20

BELLING-LEE

COMPONENTS

connecting research to industry

BELLING & LEE LIMITED, GREAT CAMBRIDGE ROAD, ENFIELD, MIDDLESEX

Telephone: Enfield 5393 Telex: 253265

WW-109 FOR FURTHER DETAILS



**This is the
size of the big
development
in connectors!**

This miniaturised version of the famous McMurdo Red range provides 26 connections - two more than any other connector of comparable size - plus improved reliability. Only a quarter the size of the Red range, the entire REDETTE range has 16, 26, 38 and 52 way versions. Now available. Moulded in D.A.P., with hard gold-plated contacts. Current rating 3 amps per contact, contact resistance under 10 milli-ohms, minimum proof voltage 1,500 volts peak.

Complete the Reader Reply Card for details, or contact us direct for sample.

MCMURDO

NEW REDETTE CONNECTOR

THE MCMURDO INSTRUMENT CO. LTD · ROONEY ROAD · PORTSMOUTH
ENGLAND · TELEPHONE PORTSMOUTH 35361 · TELEX 86112



WW-110 FOR FURTHER DETAILS

RELAYS

ex stock in 7 days

*C.S.A. APPROVED IN CANADA

*MK



- ★ 3 pole 7.5 amp
- ★ 5 million ops. min.
- ★ 12/4 each per 1000
- Single pole 9/7 each per 1000

- ★ 2 pole 5 amp
- ★ 5 million ops. min.
- ★ 14/8 each per 1000

MM Contactor



- ★ 2 pole 15 amps
- ★ 5 million operations minimum
- ★ 17/8 each per 1000

*MHP Plug-in relay



- ★ 4 pole, 1 amp
- ★ 100 million operations
- ★ 13/- each per 1000

SOLDER TERMS

2 pole 8/- each per 1000

1051



- ★ Snap action microswitch relay
- ★ 7.5 amp. 1 million operations
- Also available in plug-in version
- ★ 7/5 each per 1000

*MKP Plug-in relay



*MK103

- ★ Single pole 3 amp
- ★ 1 million operations minimum
- ★ 5/11 each per 1000



MK403P NEW Plug-in relay



- ★ 4 pole 3 amp
- ★ 5 million operations minimum
- ★ 29/- each per 1000
- SOLDER TERMS
- ★ 21/9 each per 1000

RELAYS

made to measure

APPROVALS: C.E.G.B. No. 131 & 92 · B.R. POST OFFICE KRL · U.K.A.E.A.

P.O. 3000 RELAY

- ★ Manufactured to full G.P.O. specification, also to Industrial Standards
- ★ Contacts up to 30 amp



P33 PLUG-IN RELAY

- ★ Plug-in version to BPO 3000 relay, made to measure for Industrial Applications
- ★ Contact ratings up to 10A/750V
- ★ Positive-lock retaining clip
- ★ 30 million operations minimum

P.O. 600 RELAY

- ★ Compact version of BPO 3000 relay
- ★ Contacts up to 10A
- ★ Sensitivities down to 30mW
- ★ Up to 18 contact springs




COMPONENT BOARD P304



- ★ Plug-in component board unit for low cost, easy chassis fabrication
- ★ 15/- each per 500
- FROM STOCK

CONTACTOR K700 RELAY

- ★ High-current/high-voltage 3000-type relay
- ★ Contact up to 30A240V a.c.
- ★ Sensitivities down to 45mW
- ★ PTFE armature bar/lifting rods

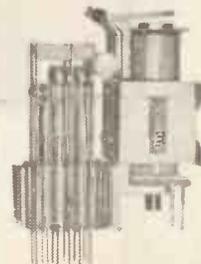


KEYSWITCH

RELAYS

KEYSWITCH RELAYS LIMITED

120/132 Cricklewood Lane · London · NW2 · Tel: 01-452 3344
Telex: 262754

WW-111 FOR FURTHER DETAILS

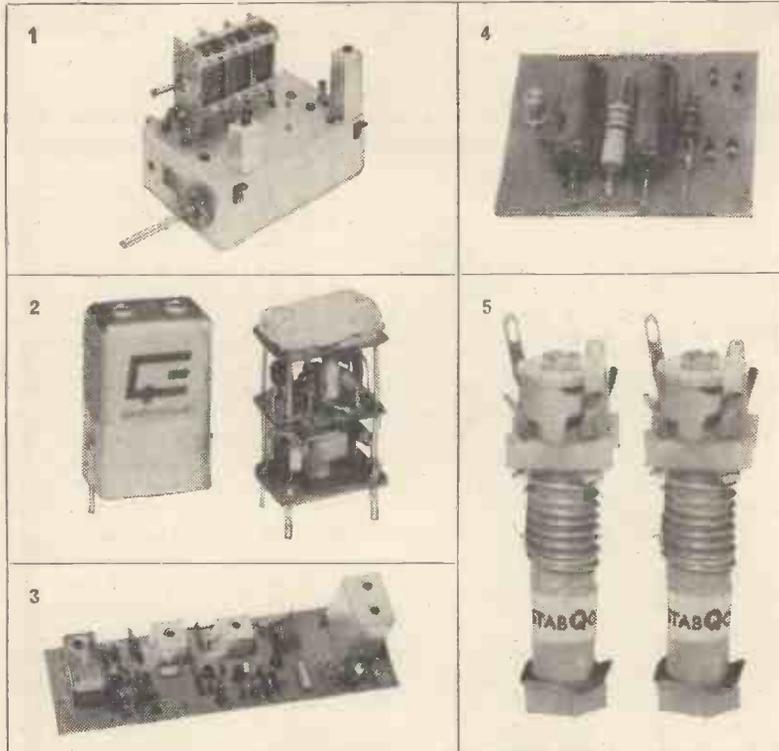



*I should like a copy of the **Electroniques Hobbies Manual**. Enclosed is a cheque/ P.O. for 10/6.*

NAME _____

ADDRESS _____

W.W.3

Below, we've summarised 2 pages from the **Electroniques Hobbies Manual**

606 PAGES REMAIN TO BE SEEN (when you've got your Manual)

With the new Hobbies Manual, you can obtain these—and over 11,000 other items—direct from Electroniques or through your Local Electroniques dealer! The service is fast; the range is the most comprehensive ever offered. And the components, which are supplied by 85 leading manufacturers, meet every kind of need—whether the project is advanced or elementary!

1 Transistor Coil Packs (Coilpax)

These silicon transistor units are available in General Coverage and Hamband versions. The IF frequency is 1620 Kc/s, ready for use with our filters and IF amplifiers as well as existing receivers as the second IF. The Manual contains comprehensive technical data and other useful information on these items.

2 Oscillator Modules

Fully transistorised, these oscillator units can be used for BFO, VFO or CIO applications. The BFO units include a variable capacitance diode as the tuning element, permitting remote control by linear law potentiometer. Extremely stable (better than .002% per degree C), they have an exceptionally pure oscillator waveform.

3 IF Strips and Filters

Two units are available—one at 1.62 Mc/s IF for use with Coilpax, the other for use at 455 Kc/s as a second conversion IF strip or as a main 455 Kc/s unit. Both include a half lattice crystal filter, AGC control, AM and SSB detection and BFO injection for CW reception. A third unit, also at 455 Kc/s uses a ceramic filter.

4 Power Modules


These small stabilised power units operate directly from 6.3V AC heater supply. Two outputs available: 6.2V at 50mA Zener stabilised, and 9.0V at 70mA MAX unstabilised. Either polarity can be earthed providing AC supply is floating.

5 Coils (Stabcoils)

A comprehensive range of transistor coils is available for intermediate frequencies of 455 Kc/s and 1.62 Mc/s, together with a complementary range of IF transformers.

Send now for your Manual, on the coupon above, to this address: Electroniques (Prop.-STC Ltd.) Edinburgh Way, Harlow, Essex. Telephone Harlow 26777.

High-grade components for amateur communications

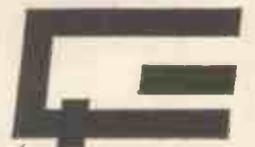


electroniques

Vortexion

quality equipment


The 120/200 watt amplifier can deliver its full power at any frequency in the range of 30 to 20,000 c.p.s. for which the response is accurate within 1 db with less than 0.2% distortion at 1,000 c.p.s. Noise level -90 db. It can be used to drive mechanical devices, i.e., synchronous capstan or projector motors, etc., for which the power is over 140 watts on continuous sine wave. A floating series parallel output is provided for 100-120 v. or 200-250 v., and additional matching transformers for other impedances are available. The input is 1 mW. 600 ohms.

120/200 WATT AMPLIFIER

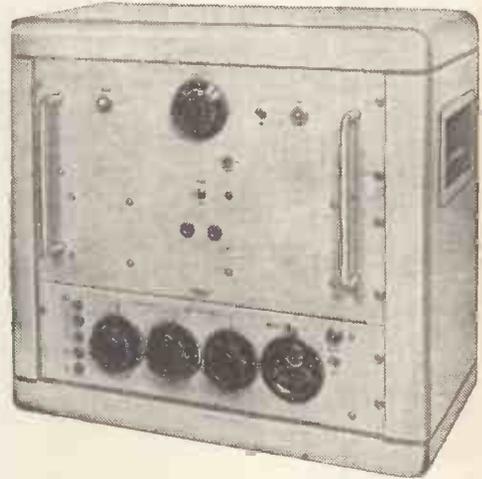

30/50 WATT AMPLIFIER

The Vortexion 30/50 watt Amplifier can deliver 50 watts of speech and music or over 30 watts of continuous sine wave and the main amplifier has a response of 30 to 20,000 c.p.s. within 1 db. at 0.1% distortion and outputs for 4, 7.5, 15 ohm and 100 volt line. Models are available with two, three or four mixed inputs which may be low impedance balanced line microphones, P.U. or Guitar inputs. Price £70 with 4 mixed inputs.

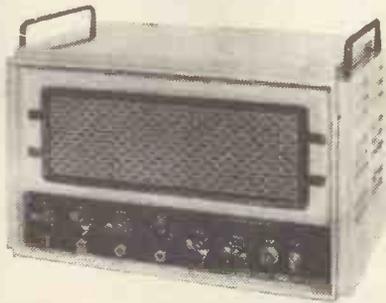

ELECTRONIC MIXER AMPLIFIER

This high fidelity 10/15 watt Ultra Linear Amplifier has a built-in mixer and Baxandall tone controls. The standard model has 4 inputs, two for balanced 30 ohm microphones, one for pick-up C.C.I.R. compensated and one for tape or radio input. Alternative or additional inputs are available to special order. A feed direct out from the mixer is standard and output impedance of 4-8-16 ohms or 100 volt line are to choice. All inputs and outputs are at the rear and it has been designed for cool continuous operation either on 19 x 7in. rack panel form or in standard ventilated steel case.

Size 18 x 7½ x 9½in. deep.
Price of standard model £49.


The 12-way electronic mixer has facilities for mixing 12 balanced line microphones. Each of the 12 lines has its own potted mumetal shielded microphone transformer and input valve, each control is hermetically sealed. Muting switches are normally fitted on each channel and the unit is fed from its own mumetal shielded mains transformer and metal rectifier.

Also 3-way mixers and Peak Programme Meters.
Price £60.

4-way Mixers from £40/8/6.

2 x 5-way stereo mixers with outputs for echo chambers, etc., available.

12-WAY ELECTRONIC MIXER

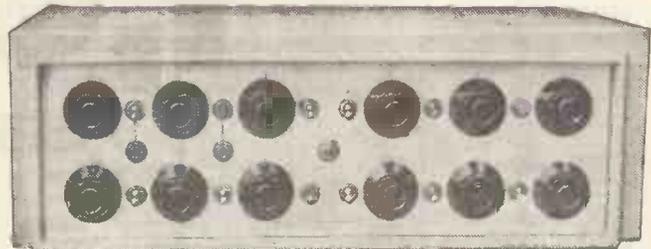

Price of standard model £98.

Full details and prices of the above on request

VORTEXION LIMITED, 257-263 The Broadway, Wimbledon, London, S.W.19

Telephone: LIBerty 2814, and 6242-3

Telegrams: "Vortexion London S.W.19"



Licenses of
Cutler-Hammer Int.,
Milwaukee, U.S.A.

1, NSF NSF NSF switches

Other NSF products:

LEDEX Rotary Solenoids & Circuit Selectors

UNION Miniature Hermetically Sealed Relays

HOLZER Automatic Timing Switches

BRAMCO Frequency Sensitive Reed Relays and
Filters

All the above are manufactured under exclusive
licensing arrangements.

If all possible variations are taken into account, one thousand is a conservative estimate of the number of different switches covered by these two lists. If not already in your files, we will be pleased to forward one or both. Trade or industry enquiries only.

We would also emphasise NSF facilities for the design and development of specialised switches and switch assemblies and will welcome enquiries.


NSF LTD "THE SWITCH PEOPLE" 31-32 ALFRED PLACE, LONDON, W.C.1.

Telephone: Langham 9561 Telegrams: Enesef Telex London Telex: 21907

HEAD OFFICE & WORKS: KEIGHLEY, YORKSHIRE.

A MEMBER OF THE *Simms* GROUP OF COMPANIES

WW-114 FOR FURTHER DETAILS

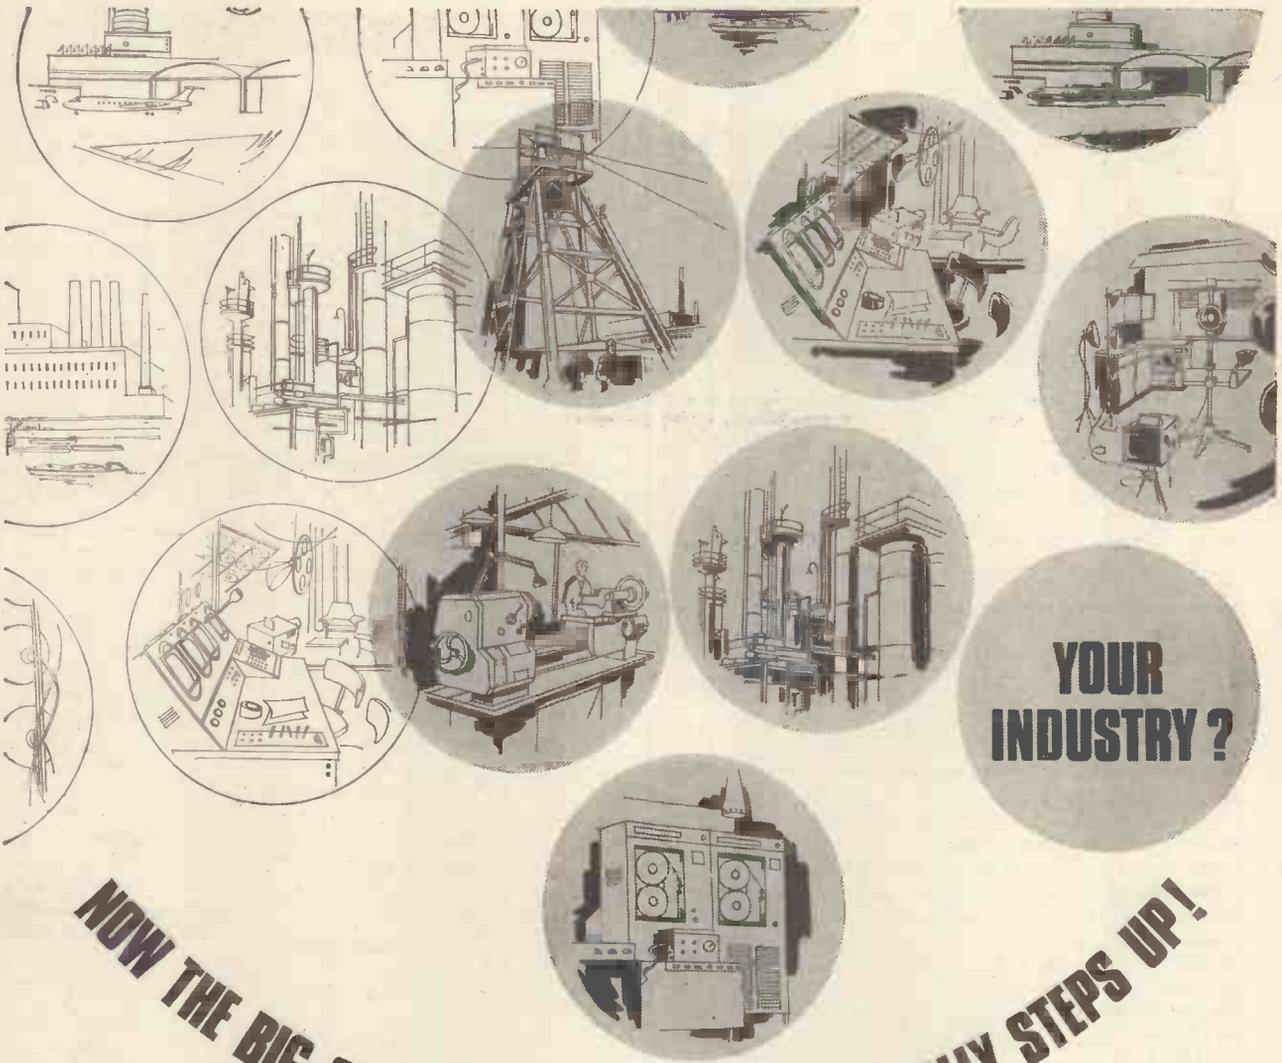

**YOUR
INDUSTRY?**


NOW THE BIG SWING TO ASTRALUX V.S.T. REALLY STEPS UP!

Everywhere Astralux Voltage Stabilising Transformers outperform and outdate conventional C.V.T. systems

HERE'S WHY ASTRALUX V.S.T. IS REPLACING C.V.T. IN INDUSTRY AFTER INDUSTRY:

Better Performance. That means improved Output Voltage Stability—output voltage maintained within $\pm 0.5\%$ for input voltage changes of $\pm 10\% - 20\%$. Even when the voltage fluctuation is as great as $\pm 10\%$ to -30% the V.S.T. will maintain the output voltage to within $\pm 1\%$. ● **Latest Materials.** High temperature (Class F) materials give optimum reliability and increased safety margins on operating temperatures. ● **Low external field.** The latest techniques in magnetic core design give improved performance, coupled with high efficiency, while still offering low external fields. ● **Stable Voltage—Stable Prices.**

Astralux prices remain stable over long periods, so costing a job ahead is facilitated with this advanced system. ● **Over 10,000 models!** The ASTRALUX V.S.T. Standard Range consists of ten basic models with over a thousand variations on each. *No other manufacturer* offers such a choice, or can offer such economical prices. ● **Low Cost Specials.** You can order V.S.T. 'specials' at little more than the cost of standard units. Our design department will be happy to prepare prototypes to your specification, for incorporation into equipment under development. Free illustrated booklet giving full details of ASTRALUX V.S.T. from

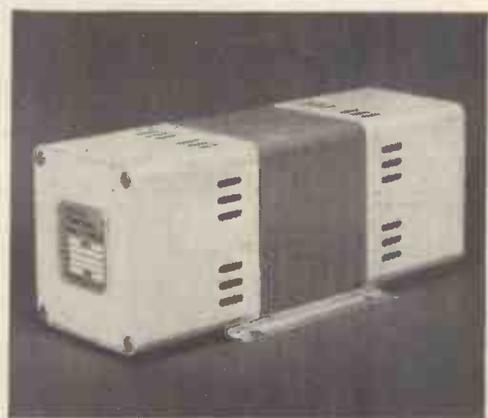

ASTRALUX dynamics limited TRANSFORMER DIVISION • BRIGHTLINGSEA • COLCHESTER • ESSEX • TEL: BRIGHTLINGSEA 2517/8
 WW-115 FOR FURTHER DETAILS



Here is the complete list of Tektronix oscilloscopes and plug-in units now being produced by our Guernsey factory.

OSCILLOSCOPES

		£
310A	dc to 4 MHz portable	271
422	dc to 15 MHz, ac-powered, portable	545
422 Mod 125B	dc to 15 MHz, ac/dc/version, portable*	666
502A	100 μ V/cm dual-beam	420
515A	dc to 15 MHz	350
524AD	dc to 10 MHz television	522
531A	dc to 15 MHz	399
533A	dc to 15 MHz—X100 magnifier	452
535A	dc to 15 MHz—sweep delay	561
541A	dc to 33 MHz	490
543B	dc to 33 MHz—X100 magnifier	522
544	dc to 50 MHz—X100 magnifier	596
545B	dc to 33 MHz—sweep delay	621
546	dc to 50 MHz—sweep delay	676
547	dc to 50 MHz—automatic display switching	728
551	dc to 27 MHz—dual-vertical, dual-beam	742
555	dc to 33 MHz—sweep delay, dual-beam	1,063
561A	dc to 15 MHz—x-y	200
564	split-screen storage	363
575	transistor curve tracer	430
575 Mod 122C	transistor curve tracer with increased collector voltage	531
581A	dc to 85 MHz	593
585A	dc to 85 MHz—sweep delay	716

For detailed information on any of our products, please fill in reader reply card or write, telephone or telex.

Tektronix U.K. Limited

Beaverton House · Station Approach · Harpenden · Herts
Telephone: Harpenden 61251 · Telex: 25559

RECENT ADDITIONS

		£
422	dc to 15 MHz, ac-powered, portable	545
422	dc to 15 MHz, Mod 125B ac/dc version, portable*	666
1S1	wide-band sampling	451
1A6	high-gain dc differential	95

PLUG-IN UNITS

		£
B	high-gain	58
CA	dual-trace dc	104
D	high-gain dc differential	68
E	low-level ac differential	76
G	wide-band dc differential	76
H	wide-band, high-gain dc	74
K	fast-rise dc	58
L	fast-rise, high-gain	84
M	four-trace dc	210
1A1	wide-band, high-gain, dual-trace	241
1A2	wide-band, dual-trace	130
1A6	high-gain dc differential	95
1S1	wide-band sampling	451
2B67	time-base	86
3A1	dual-trace dc to 10 MHz	181
3B3	time-base—delayed sweep	234
3S76	dual-trace sampling	442
3T77A	sampling sweep	261
82	dual-trace dc to 85 MHz	266

SCOPE-MOBILES @

		£
201/1	with drawer and no plug-in carrier	58
201/2	with drawer and plug-in carrier for 2, 3, 9, 10 and 11 series	62
202/1	with drawer and no plug-in carrier	58
202/2	with drawer and plug-in carrier for 1, 80 and letter series	63

and an increasing range of accessories

*battery pack available.

For overseas enquiries:

EUROPE AND THE MIDDLE EAST: Tektronix Ltd., P.O. Box 36, St. Peter Port, Guernsey, C.I.

CANADA: Tektronix Canada Ltd., Montreal, Toronto & Vancouver.

AUSTRALIA: Tektronix Australia Pty. Ltd., 4-14 Foster Street, Sydney, N.S.W.

SWITZERLAND: Tektronix International A.G., P.O. Box 57, Zug, Switzerland.


All other territories: Tektronix Inc., P.O. Box 500, Beaverton, Oregon, U.S.A.



Marconi is advanced space communication

Britain's first overseas civil satellite communication ground station has been built by Marconi on Ascension Island for Cable and Wireless Limited. Marconi has also supplied Britain's first three military space communication stations.

Marconi space capability is based on long experience in all the elements required by communication systems via synchronous and random orbit satellites—computers for traffic handling and aerial direction, highly accurate aerial and servo control systems, ultra high frequency transmitters and extremely sensitive receivers. Marconi has a lifelong experience in planning, designing, manufacturing, installing and commissioning complete operational systems anywhere in the world.

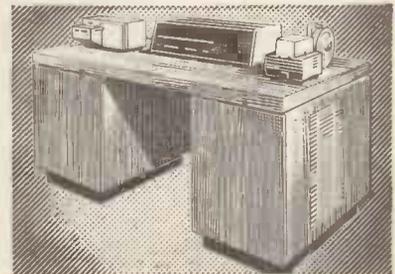

Marconi Myriad computer—a vital part of many Marconi space communication systems.

Marconi space communications systems


AN 'ENGLISH ELECTRIC' COMPANY

The Marconi Company Limited, Space Communication Division, Chelmsford, Essex, England

LTD/PS1

WW-117 FOR FURTHER DETAILS

there's nothing pocket-size about the performance of GEC's VHF pocket radiotelephones...

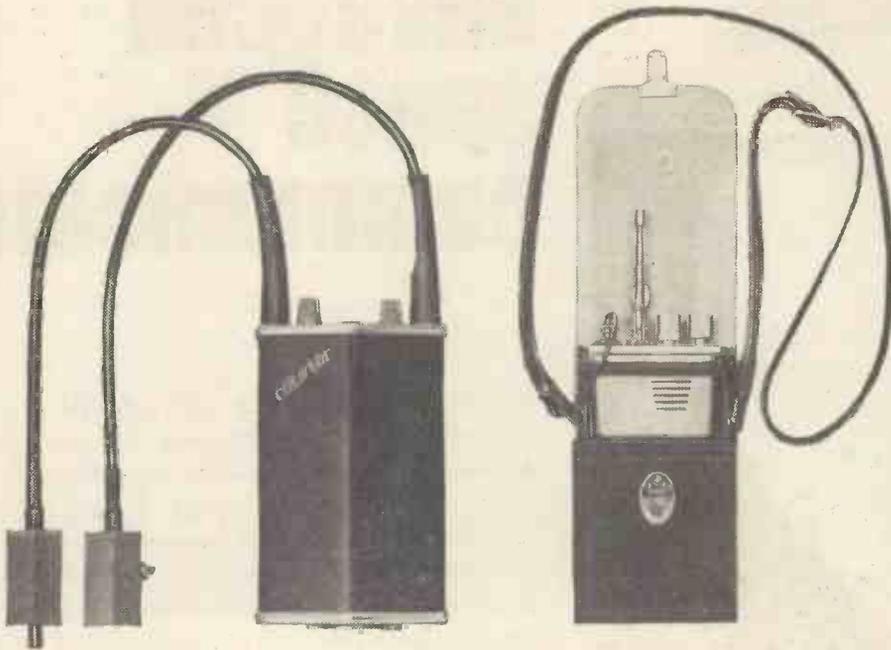

GEC fm Courier

A fully transistorised 3-channel transceiver designed to be inconspicuous in use, and allow full freedom of movement. It gives full operation fitted beneath clothing – microphone and earpiece-speaker units clip behind the lapels. Silicon transistors make the Courier extremely reliable, and suitable for a wide climatic range. Standard rechargeable battery gives 8-hour shift endurance.

An intrinsic-safety version is also available – the first pocket set to be granted an Intrinsic Safety Certificate for use in hazardous atmospheres.

The equipment meets G.P.O. Specification W.6346.

Service: F3 Telephony. Single or two-frequency simplex.
Frequency range (one, two or three channels): 71.5 Mc/s to 100 Mc/s, or 156 Mc/s to 174 Mc/s (25 kc/s spacing). (Other ranges to special order.)
Ambient conditions: Temperature -20°C to $+50^{\circ}\text{C}$. Altitude up to 20,000 ft. a.m.s.l. Relative humidity 0 to 90%.
Dimensions of Transmitter/Receiver: $6\frac{1}{8}'' \times 4\frac{1}{8}'' \times 1\frac{3}{8}''$
Weight: With battery 23 oz. Less battery 16 oz.
Power Output: Nominally 500 mW or 400 mW.
Modulation Capability: ± 5 kc/s deviation (maximum).
Sensitivity: 15 dB signal/noise ratio for $1.5\mu\text{V}$ e.m.f.
Selectivity: Pass Band ± 7.5 kc/s at 6dB. Stop Band ± 23.5 kc/s at 65 dB min.

GEC am Courier

A fully transistorised 3-channel transceiver for pocket or hand-held operation.

Service: A3 Telephony. Single or two frequency simplex.
Frequency Range: 68-174 Mc/s Band.
Number of Channels: Maximum of 3 spaced within ± 250 kc/s of mean carrier frequency. (25 or 50 kc/s spacing.)
Dimensions: $6\frac{5}{8}'' \times 3\frac{1}{8}'' \times 1\frac{1}{4}''$ ($7\frac{1}{16}''$ over controls). (Including standard battery.)
Weight: 24 oz. (including standard battery).
R.F. Output Power: Adjustable 200 mW to 400 mW.
Modulation Capability: 100% (250 mW carrier). 90% (400 mW carrier)
Sensitivity: $2\mu\text{V}$ (e.m.f.) input modulated 30% at 1 kc/s for 13 dB signal to noise ratio and 150 mW output.
Selectivity: Pass band ± 7.5 kc/s at 6 dB. Stop band: ± 23.5 kc/s at 75 dB min. (2 signal method).
A.G.C. Characteristic: Rise in output less than 4 dB for signal change 2 V to 20 mV.
 For full details of both Couriers, please contact us.



G.E.C. (ELECTRONICS) LIMITED
 Communications Group

Spon Street, Coventry. Telephone: Coventry 24155

A subsidiary of The General Electric Company Limited of England

The most satisfying volume on anybody's bookshelf

The new LEAK MINI-SANDWICH

The world's second very low distortion, piston-action loudspeaker is here! It's the Leak Mini-Sandwich, bookshelf version of the first: the Leak Sandwich Loudspeaker that is used in broadcasting studios throughout the world for checking the quality of transmissions.

At the heart of both—the new "Mini-Sandwich" and the "Sandwich"—are the revolutionary SANDWICH * cones of the speaker motors. Fantastically rigid, yet no heavier than conventional paper cones, these unique diaphragms are made of thick polystyrene foam, sandwiched in skin-thin aluminium. They respond with piston-like precision to the waveform of the voice coil signals. The rigidity of the Sandwich cone eliminates "cone break-up," the erratic flexing which causes distortion in other speakers.

Result: a remarkable smooth frequency response, free from violent peaks or troughs over a very broad frequency band. Transient response is excellent.

If space permits there is only one choice: the Leak "Sandwich." But if space is a problem you will find the "Mini-Sandwich" is a superlative small loudspeaker, designed and made exactly as the standard "Sandwich" and the performance is indistinguishable from the larger model except for the lowest octave.

*U.S. Pat. No. 3,111,187



Ask your dealer for a demonstration.

See and hear Leak Hi-Fi
at the
**INTERNATIONAL
AUDIO FESTIVAL & FAIR**
Hotel Russell
March 30th—April 2nd
STAND No. 34
Dem. Rooms Nos. 347/348

Mini-Sandwich Loudspeaker
£27.10.0d. Illustrated
Size 18½ x 11 x 7in.

Sandwich Loudspeaker
£39.18.0d.
Size 26 x 15 x 12in.

LEAK

THE FIRST NAME IN HIGH FIDELITY SINCE 1934
H. J. LEAK & CO. LTD., BRUNEL ROAD, WESTWAY FACTORY ESTATE, LONDON, W.3
Telephone: SHEpherds Bush 1173 (PBX). Telegrams: Sinusoidal, London, W.3

Post coupon NOW, for fully illustrated folders on Sandwich loudspeakers, and other Leak Hi-Fi.

Name

Address

WW

NOW!

THE

*World's smallest radio
comes to you in the new
"See for Yourself" sealed
Kit pack*



SINCLAIR MICROMATIC

SIX STAGE TRANSISTOR RECEIVER

Now when you buy your Sinclair Micromatic kit, you see every component instantly in the new sealed polystyrene kit pack. Never before in the history of radio has any kit been so elegantly presented. Your Micromatic reaches you factory fresh and guaranteed. Check for yourself at once that every component is in place in the specially shaped and fitted case. The Micromatic does not cost you a penny more bought this way. Such is the appearance and performance of this brilliant new Sinclair design that you will want to build and use it immediately. There is no other set in the world as small, efficient and dependable as this. Reception both of home and overseas programmes often proves much easier than with larger conventional radios. In fact, your Micromatic will virtually play anywhere. It is also available ready built.

TECHNICAL DESCRIPTION

The Sinclair Micromatic is housed in a neat plastic case with aluminium front panel and spun aluminium calibrated tuning dial.

Special Sinclair transistors are used in a six-stage circuit of exceptional power and sensitivity—two stages of powerful R.F. amplification; double diode detector; a high gain three stage audio amplifier. A G.C. counteracts fading from distant stations. The set is powered by two Mallory ZM.312 Cells from radio shops, Boots Chemists, etc., for 1/7 each. Plugging in the earpiece included switches the set on, withdrawing switches off. Complete kit in pack with instructions and solder.

● READY BUILT

The Sinclair Micromatic is also available ready built, tested and guaranteed. Complete in presentation case with lightweight earpiece.

- ★ MEASURES $1\frac{4}{5}$ " x $1\frac{3}{10}$ " x $\frac{1}{2}$ "
- ★ BEAUTIFULLY STYLED CASE
- ★ AMAZING POWER, RANGE AND SENSITIVITY
- ★ NEW CIRCUITRY
- ★ TUNES OVER M.W. BAND WITH BANDSPREAD AND A.G.C.
- ★ CALIBRATED TUNING DIAL
- ★ GUARANTEED 5 YEARS

59/6

79/6

FULL SERVICE FACILITIES AVAILABLE TO ALL SINCLAIR CUSTOMERS ● ALL ITEMS GUARANTEED

sinclair

SINCLAIR RADIONICS LTD., 22 NEWMARKET ROAD, CAMBRIDGE

Telephone 52996 (STD. CODE OCA 3)


WW—121 FOR FURTHER DETAILS

SINCLAIR Z.12

COMBINED 12 WATT HIGH FIDELITY AMPLIFIER AND PRE-AMP

- 12 WATTS R.M.S. OUTPUT CONTINUOUS SINE WAVE
- SIZE—3" × 1½" × 1½"
- RESPONSE—15-50,000 c/s ± 1dB

For size alone, the Z.12 marks an important advance in quality design, for its amazing compactness opens up exciting new vistas in amplifier use. Combined with this are fantastic power and superb quality which can provide an effortless output of 12 watts R.M.S. continuous sine wave from the unique eight transistor circuit used. Basically intended as the heart of any good mono or stereo hi-fi system, the size and efficiency of this Sinclair unit make it equally useful for a car radio, a high quality radio with the Micro FM, in a guitar, P.A. or intercom system, etc. Other applications are certain to suggest themselves to constructors. The manual included with the Z.12 details mono and stereo tone and volume control circuits by which inputs can be matched (and switched in) to the pre-amp. The size, performance and price of the Z.12 all favour the constructor seeking the finest in transistorised audio reproduction—it is in fact today's finest buy in top grade high fidelity and many thousands are now in use throughout the world.

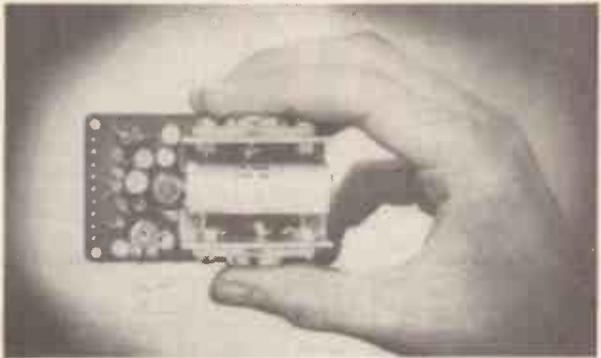


15 WATTS R.M.S. MUSIC POWER (30 WATTS PEAK)

- ★ Ultra-linear class B output and generous neg. feedback.
- ★ Output suitable for 3, 7.5 and 15 ohm loads. Two 3 ohm speakers may be used in parallel.
- ★ Input—2mV into 2K ohms.
- ★ Signal to noise ratio—better than 60dB.

BUILT, TESTED AND GUARANTEED

89'6

PZ.3 Transistorised mains power unit. Will power two Z.12's and Stereo 25 with ease. **79'6**

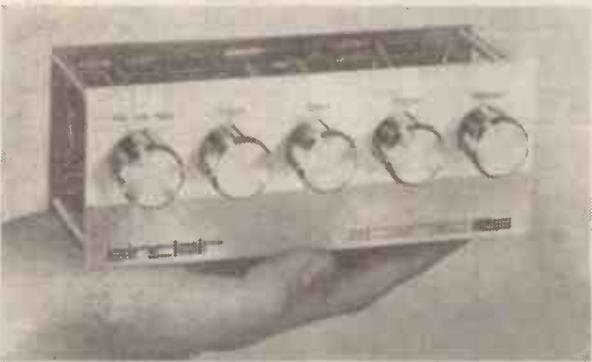

SINCLAIR STEREO 25

DE-LUXE PRE-AMP/CONTROL UNIT

For use with two Z.12's or any hi-fi stereo system. Finest quality components are used in its construction, whilst the overall appearance of this compact de-luxe pre-amp and control unit reflects the professional elegance which characterises all Sinclair designs. The front panel is in solid brushed and polished aluminium with well styled solid aluminium knobs.

Frequency response 25 c/s to 30 kc/s ± 1dB connected to two Z.12's. Sensitivity Mic. 2mV into 50kΩ; P.U. -3mV into 50kΩ; Radio -20mV into 47Ω. Equalisation correct to within ± 1dB on RIAA curve from 50 to 20,000 c/s. Size 6½in. × 2½in. × 2½in. plus knobs.

BUILT, TESTED AND GUARANTEED

£9.19.6

SINCLAIR MICRO FM

COMBINED FM TUNER/RECEIVER

Less than 3in. × 1½in. × ½in. and outstanding in every way this is a transistor F.M. Superhet which uses pulse counting discriminator for superb audio quality. Low I.F. makes alignment unnecessary. Tunes 88-108 Mc/s. The telescopic aerial suffices for good reception in all but poorest areas. Signal to noise ratio—30dB at 30 microvolts. Takes standard 9v. battery. One outlet serves for feeding to amplifier or recorder, the other allows set to be used as a pocket portable. Brushed and polished aluminium front, spun aluminium dial. This is a fascinating set to build which gives excellent reception by any standards.

7 Transistors, 2 diodes. Low I.F. obviates use of relatively large components and eliminates need for alignment after building. Set operates from a self-contained standard 9v. battery. A guaranteed Sinclair design.

Complete kit inc. aerial, case, earpiece and instructions **£5.19.6**



SINCLAIR GUARANTEE

Should you not be completely satisfied with your purchase when you receive it from us, your money will be refunded in full and at once without question. FULL SERVICE FACILITIES AVAILABLE. If you prefer not to cut page, please quote WW367 when ordering.



SINCLAIR RADIONICS LTD.
22 NEWMARKET ROAD, CAMBRIDGE

Telephone 52731

SINCLAIR RADIONICS LTD., 22 NEWMARKET ROAD, CAMBRIDGE

Please send

NAME

ADDRESS

for which I enclose cash/cheque/money order value £.....s.....d.

WW367

WW-122 FOR FURTHER DETAILS

MINIFLUX TAPE HEADS

SPECIAL OFFER of new MINI-FLUX HEADS at less than half price.

All supplied complete with full specifications and circuit diagrams.

Type LF6.0. Low impedance half-track mono ferrite erase head with built-in oscillator coil. List £3, offered at 22/6 each.

Miniflux Type No. VLF4. Quarter-track stereo ferrite erase head as used on Reflectograph Model B, Simon SP5, Truvox Brenell 3-star Elizabethan FT1, etc. Listed at £3/10/-, offered at 32/6.

Miniflux Type VKH.4. Quarter-track stereo rec./play head as used on Reflectograph, Brenell, SP5, Truvox etc. Listed at 6 gns., offered at £2/15/- each.

Also available. Miniflux full track ferrite erase heads at 30/- each. Miniflux rec./play half-track stereo heads, Type SKN4. Low inductance 70 m/h, for use with Transistor Circuits, complete with rear fixing screws and nuts and mu-metal cover, offered at 55/- each.


Closed for Stock-taking and Easter Holidays from Tuesday 21st March to Friday 31st March inclusive. Re-opening Saturday 1st April.

Send S.A.E. for full electrical and mechanical specifications of above heads.

LEE ELECTRONICS
 400 Edgware Road, Paddington. Tel.: 5521
 (Closed Thursdays.)

WW-126 FOR FURTHER DETAILS

A.C. MILLIVOLTMETER By TRANSMETRIX

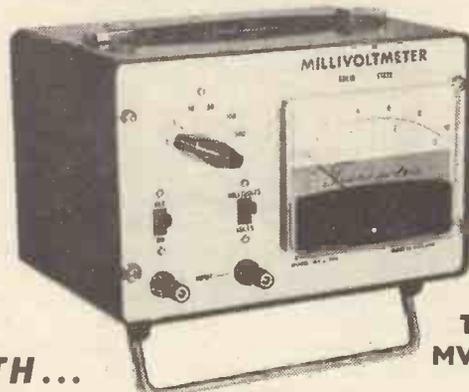

TYPE MVI-300

WITH...

- SILICON SOLID STATE DEVICES
- HIGH IMPEDANCE
- ACCURACY AND COMPACTNESS
- PORTABILITY (BATTERY POWER)
- COMPETITIVE PRICE

For further details and information write for...

TECHNICAL DATA SHEET MVI-300

**TRANSMETRIX
ELECTRONIC
SYSTEMS LTD.**

HYDE WORKS,
HYDE ROAD,
SHANKLIN, I.W.
Tel: 3096-3458

WW-128 FOR FURTHER DETAILS

the WyndSOR Vanguard . . .
the most versatile
recorder at its price*
offering so many
outstanding features . . .

- 4 track - 3 speeds - 7in. Spools
- Separate Record and Replay amplifiers
- Double Play
- Sound-on-Sound
- Detachable lid fitted 8" speaker
- Tape Monitoring facility



- Push button controls
- Recording meter and Playback indicator
- Straight through amplifier facility
- Bass, treble, volume and record gain controls
- Many other features

Before you buy an ordinary tape recorder write for full details of the Vanguard and other models.


* All British and full value for money at only 59 gns. inc. 1,800ft. LP tape and Tape manual. (Less mike.)

WYNSOR RECORDING CO. LTD. (Dept. WW1)
 WyndSOR Works, Bellevue Road, Friern Barnet, London, N.II. ENT 2226

WW-127 FOR FURTHER DETAILS

Keep those Contacts CLEAN by using a DIACROM SPATULA

The "Diacrom" is a metal spatula upon which diamond powder has been deposited by a special process. No deep scratches are possible because density is controlled and the polishing of the contacts is achieved by a gentle brushing motion. With coloured nylon handle for complete insulation and easy size identification.

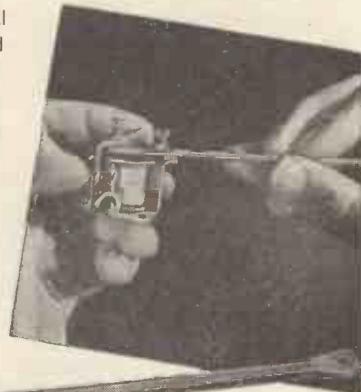

Manufactured in France
British Patents applied for

- Grain size 200, thickness 50/100 mm., both faces diamonded. For quick cleaning of industrial relays and switching equipment, etc.
- Grain size 300, thickness 55/100 mm., both faces diamonded. For smaller equipments, like telephone relays, computer relays, etc.
- Grain size 400, thickness 25/100 mm., one face diamonded. For sensitive relays and tiny contacts. Two close contacts facing each other can be individually cleaned, because only one face of the spatula is abrasive.

Sole Distributors for the United Kingdom
SPECIAL PRODUCTS (DISTRIBUTORS) LTD
 81 Piccadilly, London, W.1. Phone: GROsvenor, 6482

As supplied to the War Office, U.K.A.E.A., Electricity Generating Boards, British Railways and other public authorities; also leading electronic and industrial users throughout the United Kingdom.

WW-129 FOR FURTHER DETAILS

WIRELESS STATIONS B 43/R 220

This is a complete mains operated (200-250 v. 50 c/s.) transmitter and receiver in one metal case, size 21½ x 12½ x 18½ in., and weight 90lbs. They are for fixed frequency operation and are crystal controlled. Frequencies are between 60 and 100 Mc/s. and the transmitter and receiver are not on the same frequency each using a separate crystal. Technical handbooks are supplied and it is not very difficult to alter the frequency of either or both sections. Transmitter output is 12 watts A.M., the receiver has a built-in monitor speaker. There are 14 valves in the receiver and 8 valves in the sender. The whole station is supplied complete with all cables, connectors, feeder matching units, headphones, telephone hand set, a complete set of spare valves for receiver, transmitter and power unit. (In addition to those fitted.) Packed in a wooden case (total weight about 200 lbs.). Special note.—We cannot undertake to supply any particular frequency under any circumstances. BRAND NEW. £20. Carr. 50/-.

DISTORTION FACTOR METER

MARCONI TF-142E. This instrument measures the percentage of total harmonic distortion in the fundamental frequency range 100 to 8,000 c/s. The lowest scale engraving is 0.05%. Will handle 2 watts (continuous) and will give satisfactory readings with only 1 mW input. Mains operated. Output impedance 600 ohms. Very good condition. £25. Carr. £1.

V.H.F. SIGNAL GENERATOR

MARCONI TF-801A. Covers 10 to 300 Mc/s. (4 bands). DIRECTLY calibrated. Int. Mod. at 400, 1,000 and 5,000 c/s. Attenuated or force output. Guaranteed overhauled, accurate and in perfect working order. £32/10/- Carr. £1.

BEAT FREQUENCY OSCILLATORS

MARCONI TF-195M. Covers 10 cps. to 40 kc/s. in two sweeps. 0 to 20 kc/s. and 20 to 40 kc/s. Output 2 watts into 600 or 2,500 ohms. Panel meter indicates output voltage. A.C. mains operation 100 to 250 volts. First class condition. Fully tested. £20. Carr. 30/-.

EVERSHED BRIDGE MEGGER. 500 volt. Varley and Loop tests. Complete in leather case and in as new condition. £35.

MARCONI "Q" METER. Type 329G. As new condition and in perfect working order. £65. Carr. 50/-.

BC-221 FREQUENCY METERS

As new condition complete with crystal and valves. In perfect working order but WITHOUT calibration charts. £9/19/6. Carr. 10/6.

MICROAMMETERS

R.C.A. 0-500 microamps. 2½ in. circular flush panel mounting. Dials are engraved 0-15, 0-600 volts. As used in the American version of the No. 19 set. BRAND NEW and boxed 15/-, P. & P. 1/6.

AR-88 SPARES

Knobs, Medium size, Set of 8... 10/-
Knobs, Large size... 5/6
Condenser (3 x 4 mfd.)... Post 4/6... 12/6
Mains Trans. (L.F.) (postage 9/-)... 42/6

AR-88.LF RECEIVERS

A good selection is available for callers at from £30. All are in good condition and are functioning perfectly. Realigned.

LABORATORY pH METER

MARCONI type TF.1093/1. Range 0-14 pH direct reading. Full temperature compensation. Scale expansion providing discrimination of 0.01 pH. A.C. mains operation. BRAND NEW complete with electrode stand and manual. Full details on request. £35.

SANGAMO WESTON VOLT METERS

S61. Dual range 0-5 and 0-100 v. D.C. FSD 1 mA. 3in. scale. Recent manufacture. Ideal for schools. Complete in super quality canvas carrying case with test prods and leads.



BRAND NEW. Boxed 32/6. Post 2/6.

ADVANCE TEST EQUIPMENT

- H1B Audio Signal Generator £30 0
- J1B Audio Signal Generator £30 0
- J2B Audio Signal Generator £35 0
- TT1S Transistor Tester £37 10
- VM76 AC/DC Valve Voltmeter £72 0
- VM77C AC Millivoltmeter £40 0
- VM78 AC Millivoltmeter (transistorised) £55 0
- VM79 UHF Millivoltmeter (transistorised) £125 0

These are current production, manufactured in U.K. by Advance Electronics Ltd. (not discontinued models). Showing a saving of approximately 33½% on nett trade price. BRAND NEW, all in original sealed carton. Carr. 10/- extra per item. Special offer of 10% discount for schools and technical colleges, etc.

OSCILLOSCOPE TYPE 13A

Double beam. Time base 2 c/s. to 750 kc/s. Band width up to 5 Mc/s. Calibration markers at 100 kc/s. and 1 Mc/s. Cathode follower probe for H.F. testing. Operates from A.C. mains 100 to 250 volts. A completely reliable quality instrument. Supplied fully checked with all leads, graticule, visory circuit etc. £22/10/- Carr. 30/-.

PCR-1 and PCR-3 RECEIVERS

Brand new condition. 3 wavebands. R.F. stage, 6 valves. PCR-1 860-2080 metres, 190-570 metres, 5.6-18 Mc/s., internal speaker. PCR-3 190-570 metres, 2.3-7.3 Mc/s. 7.0-23 Mc/s. required external 3 ohm speaker. External Power Supply required or can be fitted with internal Mains Power Supply for £2 extra. Circuit supplied. Fully tested prior to despatch, £8/19/6. Carriage 10/6. Fuller details upon request. Brand new external Power Supply Units. Vibrator Unit for operation from 12 v. car battery, for caravans or boats 15/6, or A.C. Mains Units £2. Carriage 5/6.

HAMMARLUND SP-600-JX

20 valve dual conversion superhet receiver covering 540 kc/s. to 54 Mc/s. in 6 bands. This is a professional quality receiver of recent design with stability of 0.01% or better. Second channel rejection 74 dB. Down and spurious responses are at least 100 dB. down. Bandwidth from 200 c/s. to 13 kc/s. Crystal filter with crystal phasing control. Operates directly from A.C. mains 90-260 v. 50-60 c/s. Original cost £510. Supplied overhauled and in first class working order. £100. Fuller details on request.

PRICES NOW REDUCED CINTEL EQUIPMENT. ELECTROLYTIC CAPACITANCE AND INCREMENTAL INDUCTANCE BRIDGE No. 36601


A modern instrument, all solid state, which accurately measures the capacity of electrolytic condensers from 0.1µF to 1,000µF under operating conditions. Leakage current and polarizing voltage are separately metered. Inductances from 100 mH to 100 H can also be measured with current up to 100 mA. A.C. mains operation. Unused with handbook. List Price £220. Our Price £70.

WIDE RANGE CAPACITANCE BRIDGE. No. 1864. A matching instrument to the above. All solid state. Mains operation. Measures from 0.002pF to 100µF. Unused with handbook. List Price £250. Our Price £75.

PULSE GENERATOR. MARCONI TYPE TF.675.F. Repetition frequency 50 c/s. to 50 kc/s. Pulse duration 0.15 to 100µ sec. Variable amplitude positive or negative pulses of up to at least 30 volts peak across a load of 1kΩ or 50 volts across 100kΩ. Internal 0.1 and 0.5µ sec. delay lines. BRAND NEW complete with Manual. List Price £125. Our price £45.

LOW FREQUENCY GENERATOR MARCONI TYPE TF.1382. Frequency 0.0033 c/s. to 1 kc/s. in five bends. Sine, Square and Ramp waveforms. Continuous variable output from 0-15 volts peak to peak into a 2.5kΩ load. BRAND NEW complete with Manual. List Price £195. Our Price £75.

DELAY GENERATOR MARCONI TYPE TF.1415. Provides sweep-delaying facilities when used in conjunction with the TF. 1330 (series) or similar oscilloscope. Alternatively, it may be used independently as a general purpose delay generator. Detailed technical specification supplied upon request. BRAND NEW £35.

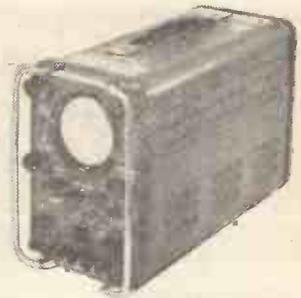

PORTABLE OSCILLOSCOPE CT.52.

A compact general purpose instrument with many unusual features. Size 9in. high, 8in. wide, 16½in. deep. Time base 10 c/s. to 40 kc/s. Y plate sensitivity 40 v. per cm. Tube 2½in. Frequency compensated amplifier up to 38 dB gain. Bandwidth up to 1 Mc/s. Single sweep facilities. Operates from A.C. mains 100-250 volts 50 c/s. Complete with all test leads, metal transit case, instruction book and circuit diagram. BRAND NEW. Tested and guaranteed. £22/10/- Carr. 10/-.

PHASE MONITOR ME-63/U (AN-URM-69)

Designed to measure directly the phase angle between two applied audio frequency signals of from 20 to 20,000 c.p.s. +1%. Direct indication on a panel meter. Input can be sinusoidal or non-sinusoidal from 2 to 30 volts peak. Of recent manufacture (1957) by Control Electronics Inc. and ex-U.S.A. Air Force. In first class condition with handbook. A complete instrument with 19 valves. £40. Carr. 30/-.

T.C.C. METALPACK CONDENSERS.

0.1 mfd. 500 v. D.C. wkg. at 70°C. Brand new, polythene wrapped, 7/6 doz., or £2 per 100. T.C.C. METALMITE 350 v. D.C. wkg. 0.1 mfd. (CP37N); 0.05 mfd. (CP35N); 0.01 mfd. (CP.32N) all at 5/6 doz. or 32/6 per 100. SPRAGUE METAL CASED CONDENSERS 0.01 mfd. 1,000 v. D.C. wkg., 5/6 doz., or 32/6 per 100.

T.C.C. VISCONAL CONDENSERS.

8 mfd. 800 v. D.C. wkg. at 71°C. CP 152 v. Size 3 x 1½ x 5in. high. BRAND NEW (boxed), 8/6 each. DUBILIER. 4 mfd. 600 v. wkg. CP 130T or similar. 1½ x 1½ x 4½in. high. BRAND NEW (boxed), 4/6 each. All post paid.

STANDARD TRANSFORMERS

Vacuum impregnated, interleaved, E.S. screen, universal mounting. Size 4 x 3½ x 2½in. ALL BRAND NEW. 24/- each. Post 4/6.

- Type 1. 250-0-250 v. 80 mA. 6.3 v. 3.5 a., 6.3 v. 1 a., tapped at 2 a.
- Type 2. As above but 350-0-350 v. 80 mA.
- Type 3. 30 v. 2 a., tapped at 12, 15, 20 and 24 v. to give 3-4-5-6-8-9-10 v., etc.
- Type 5. 0-6-9-15 v. 4 a. Ideal for chargers.



LOW CAPACITANCE BRIDGE MARCONI TF.1342.

Range 0.002 pF. to 1,111 pF. Accuracy 0.2%. Three terminal transformer ratio arm bridge allows "in situ" measurements. Internal oscillator frequency 1,000 c/s. 12 x 17 x 8½in. Weight 15½ lbs. A.C. mains 200 to 250 and 100 to 150 v. 40-100 c/s. With leads and handbook. ABSOLUTELY BRAND NEW. £45.

CHARLES BRITAIN (Radio) LTD.

11 UPPER SAINT MARTIN'S LANE LONDON, W.C.2. TEMple Bar 0545

Near Leicester Sq. Station. (Opposite Thorn House) Shop hours 9-6 p.m. (9-1 Thursdays). Open all day Saturday

LASKY'S RADIO

LONDON'S LARGEST STOCKISTS OF HI-FI AUDIO EQUIPMENT

BY ALL THE WORLD'S FAMOUS MANUFACTURERS

DEMONSTRATION STUDIOS

Lasky's Radio—established over 30 years—offer you the most exciting and up-to-date chain of High Fidelity and Electronics Stores in London with the largest and most comprehensive stocks in Great Britain.

Our branches at 207 EDGWARE RD., W.2, 118 EDGWARE RD., W.2, 33 TOTTENHAM COURT RD., W.1 and 152/3 FLEET ST., E.C.4, have huge stocks of everything in the "World of Electronics,"—by all the well-known British, Continental, American and Japanese manufacturers. Plus TV, Hi-Fi Audio Equipment, Radiograms, Record Players, and a full range of domestic appliances. In addition our 118 EDGWARE RD., W.2, branch, has the widest selection in Great Britain of Mains and Transistorised Radios with over 400 different models in stock. Our branch at 42 TOTTENHAM COURT RD., W.1 is London's most up-to-date High Fidelity Sound Centre.

HI-FI FURNITURE

Choose from our extensive range of equipment cabinets and speaker enclosures by Record Housing, Fisher, G.K.D., Design Furniture, etc. A full range is in stock to suit all types of equipment, furnishing styles, etc. Complete installations can be supplied to your choice, and our expert staff will be pleased to advise you.

Illustrated—the Lowflex equipment cabinet by Record Housing suitable for a wide range of equipment including space for record and tape storage.

If you cannot call at any of our branches please send details of your requirements to our head office and we shall be pleased to quote without obligation. We operate the "Purchase Tax Free" scheme for overseas visitors. Full H.P. terms available.



COMPLETE SYSTEMS

A Lasky's "Package Deal" allows you to purchase the complete Audio System of your choice at a worthwhile cash saving. We shall be pleased to quote our "Package Deal." Prices for any selection of equipment of your own choice. Send us details of your requirements. H.P. and Easy Credit Terms can be arranged on "Package Deals."

TAPE RECORDERS


MAGNAVOX 363 TAPE DECKS

The very latest 3 speed model—1 $\frac{1}{2}$, 3 $\frac{1}{2}$, 7 $\frac{1}{2}$ i.p.s. available with either $\frac{1}{2}$ track or $\frac{3}{4}$ track head. Features include: pause control; digital counter; fast forward and rewind; new 4 pole fully screened induction motor; interlocking keys. Size of top plate 13 $\frac{1}{2}$ x 11 x 5 $\frac{1}{2}$ in. deep below unit plate. For 200/250 v. A.C. mains, 60 c.p.s. operation. New unused and fully guaranteed.

LASKY'S PRICE $\frac{1}{2}$ track model £10.10.0 Carriage and Packing 7/6 extra

LASKY'S PRICE $\frac{3}{4}$ track model £13.9.6 Packing 7/6 extra

SPECIAL FOR OVERSEAS CUSTOMERS—the new Magnavox-Collaro 363 Deck for 110/125 v. 50 or 60 c.p.s. mains now available, prices as above. Post to any part of the world, 35/-.




NEW MARTIN TAPE RECORD REPLAY AMPS.

Now available from stock—for use with the Magnavox 363 Tape Deck.
 $\frac{1}{2}$ track model LASKY'S PRICE £14.19/6 Carriage & Packing 4/6 extra
 $\frac{3}{4}$ track model LASKY'S PRICE £16.19/6 Packing 4/6 extra
 Optional Extra: Control panel (see then on) to tape deck and amplifier controls.
 LASKY'S PRICE 12/6. Post & Packing 2/6.

NEW SPECIAL INTEREST ITEM FOR THE TAPE RECORDING ENTHUSIAST FM RADIO TUNER A1004

Made by TTC this unique 5 transistor FM Radio Tuner enables you to record direct any broadcast on the 88-108 Mc. band simply by plugging the tuner into your tape recorder. Self powered by one FT3 type battery the tuner may also be used with any amplifier, radio or TV having an input for mic. or P.U. It is also suitable for use with the TTC FM wireless microphone (see Spec. Interest Items) and a recorder. In metal case, size 5 $\frac{1}{2}$ x 2 $\frac{1}{2}$ x 1 $\frac{1}{2}$ in. finished in black and silver. Large easy to read tuning scale. 18in. fully directional telescopic aerial. Complete with battery, connecting lead with jacks and operating ins.

LASKY'S PRICE £6.19.6 Post 5/-.



NEW INTERNATIONAL TAPE

FAMOUS AMERICAN MADE BRAND TAPE AT RECORD LOW PRICES IN CELLO WRAPPED BOXES FULLY GUARANTEED

3in. Message tape, 150ft.	2/6	5 $\frac{1}{2}$ in. Long play, 1,200ft. Acetate ..	12/6
3in. Message tape, 225ft.	3/9	5 $\frac{1}{2}$ in. Standard play, 850ft. P.V.C.	11/6
3in. Message Tape, 900ft.	7/6	5 $\frac{1}{2}$ in. Triple play, 2,400ft. Mylar ..	45/-
3 $\frac{1}{2}$ in. Triple play, 600ft. Mylar ..	10/-	5 $\frac{1}{2}$ in. Long play, 1,200ft. Mylar ..	15/-
4in. Triple play, 900ft. Mylar ..	17/6	7in. Standard play, 1,200ft. Acetate ..	12/6
5in. Double play, 1,200ft. Mylar ..	15/-	7in. Standard play, 1,200ft. Mylar ..	12/6
5in. Long play 900ft. Acetate.	10/-	7in. Long play, 1,800ft. Mylar ..	19/6
5in. Standard play, 600ft. P.V.C.	8/6	7in. Double play, 2,400ft. Mylar ..	25/-
5in. Triple play, 1,800ft. Mylar ..	35/-	7in. Long play, 1,800ft. Acetate.	15/-
5 $\frac{1}{2}$ in. Double play, 1,800ft. Mylar ..	22/6	7in. Triple play, 3,600ft. Mylar ..	50/-

1/- Post extra per reel; 4 reels and over Post Free.

AMPLIFIERS

SANSUI We have a full range of this outstanding High Fidelity equipment, including Stereo and Mono Tuners, Amplifiers and Tuner/Amplifiers, stereo headsets, loudspeaker systems etc. Please send S.A.E. for full, illustrated literature and price list.

TRANSISTORISED (SOLID STATE) STEREO AMPLIFIER BARGAINS!!!



MODEL M.S.T.15

An extremely high quality High Fidelity Integrated Stereo Amplifier—made by famous British manufacturer. Spec.: Output 15 watts RMS per channel at 15 Ω (18.5 watts at 8 Ω); 22 transistors plus 2 diodes; frequency response 20 c/s to 20 kc/s. (distortion better than 0.06% full power); 5 inputs Mag. PU.1 2 mv., Mag. PU.22-40 mv., crystal PU 500 mv., Tape 100 mv., Radio.100 mv.; output imp. 8 Ω or 16 Ω per channel; push button filters—LP 20-40-80 c/s, HF 8-12-20 kc/s, plus sep. continuous

bass and treble controls; balance control; tape monitor; Stereo/Mono/Reverse selector; input selector; on/off/vol. All circuits are individually fuse protected in addition to AC mains fuse. For 100/250 v. AC mains operation. The whole unit is beautifully engineered and is housed in a free standing metal case size 12 $\frac{1}{2}$ x 5 $\frac{1}{2}$ x 10 $\frac{1}{2}$ in. with black/silver control panel (the complete amp. control unit is easily removable from the case for mounting in a cabinet). All inputs and outlets are grouped at rear. Original List price 73 Gns.

LASKY'S PRICE 29 $\frac{1}{2}$ gns. Carriage 15/-.


MODEL KT-55

Made by well-known British manufacturer and incorporating the very latest transistor circuitry. Spec.: Output 5 watts per channel; 14 transistors (7 per channel); frequency response 25 c/s to 35 kc/s at 3 watts; input requirements P.U. 12 mV/Radio 80 mV, tape 80 mV (radio and tape inputs are also suitable for higher output crystal cartridges); output imp. 8-16 Ω ; bass, treble and balance controls with switching for Mono or Stereo and tape monitor; outlet socket for tape recorder. For 110/250 v. A.C. mains. All circuits are fully fuse protected. Very compact free standing teak cabinet, size 13 $\frac{1}{2}$ x 6 $\frac{1}{2}$ x 4 $\frac{1}{2}$ in., with brushed aluminium front panel; all inputs and outlets are grouped at rear for easy access. Original List Price 25 gns.

LASKY'S PRICE £16.19.6 Post & Pack. 10/-.



RECORD PLAYERS



B.S.R. AUTOCHANGERS NEW LOW PRICES

Fully guaranteed complete with cartridge and stylus.
 UA14 4-speed mains model £4 9 6
 UA16 4-speed mains model £4 19 6
 UA16 9v. battery model £5 19 6
 UA20 4-speed mains model £5 19 6

NEW—B.S.R. UA70 (Illustrated left)
 4 speed mains autochanger superb modern styling at amazingly low price.
 LASKY'S PRICE £9.19/6 (ex cartridge).

GARRARD AUTOCHANGERS AT LOWEST EVER PRICES!

AT60	£10 19 6	A1000	£6 8 0
AT6 Mk. II	£10 19 6	A2000	£6 16 6
3000LM with stereo cartridge	£8 19 6	GARRARD BASES	
AT0	£19 9 0	WB1	£3 16 3 WB2 ..
Lab. A Mono/Stereo	£14 19 6		£5 5 0
Lab. A on plinth	£15 19 6	CLEARVIEW PERSPEX COVERS	
A60	£7 7 0	WB1 ..	£3 17 0 WB2 ..
			£5 7 11

TRANSCRIPTION MOTORS

GARRARD 401	£30 9 0
GARRARD Lab. 80, less cart.	£24 18 6

CONNOISSEUR

Craftsman II	£17 2 11
Craftsman III	£22 19 6
Model B	£25 4 0
LENCO GL58	£17 1 9
LENCO GL68	£19 10 7
LENCO G88	£15 15 0
LENCO GL70	£29 9 8
LENCO G99	£21 19 5
THORENS TD135 I	£26 5 0
THORENS TD135 II	£40 5 8
THORENS TD124 II	£40 5 8
THORENS TD150	£20 13 2

SINGLE PLAYERS

Auto. start and stop. Complete with pick-up and crystal cartridge.

EMI with Stereo cartridge	£3 19 6
COLLARO Junior 4-speed	£3 9 6
GARRARD SRP12	£4 7 6
GARRARD SRP10 mains mdl.	£4 19 6
GARRARD SRP10 batt. mdl.	£4 19 6
GARRARD SP25 Light t/table	£9 19 6
GARRARD SP25 Heavy t/table	£10 19 6
(Garrard SP25's are ex-cartridge)	
PHILLIPS AG1016	£12 12 0
BRAUN PCL Stereo	£8 19 6

All other current models available. Postage on all above 5/- extra.

CRYSTAL PICK-UP CARTRIDGES—LOWEST PRICES EVER!

All complete with Styl L.P. and Standard Stereo
 Ronette Stereo O.V. Turnover with 2 sapphires .. 25/-
 Ronette Stereo type 105 and 106 with 2 sapphires 25/-
 Ronette Stereo type 105 and 106 with diamond .. 35/-
 L.P. Stereo and sapphire standard .. 35/-

Full range of Goldring and Philips cartridges stocked. Some of these cartridges are cheaper than styl.
 AND EVEN LOWER PRICES Save Money!
 C.T.I. Mono 2 sapphires 4/11
 Collaro 2 sapphires, stereo 15/-
 Collet SC1 diamond L.P. stereo 10/6
 Sonotone 2TA mono 15/-

LASKY'S RADIO FOR FINEST VALUE and COURTEOUS SERVICE

WW-130 FOR FURTHER DETAILS

TRANSISTORISED BARGAINS & COMMUNICATIONS SETS

THE WIDEST RANGE AVAILABLE TODAY

LASKY'S RADIO

TRANSISTOR PORTABLES



SUPERB VALUE OFFER— FAMOUS MAKER'S SURPLUS PORTABLE TRANSISTOR RECEIVERS MODEL 2105

7 transistor plus 2 diode superbet, 6 waveband portable receiver. Covers the full Medium waveband and Short waveband 31-94M, and also 4 separate switched band-spread ranges, 13M, 16M, 19M and 25M, with Band Spread Tuning. All Mullard Transistors and Diode. Uses 4 U2 batteries, 5in. Ceramic Magnet P.M. Speaker, 500 MV output, Telescopic aerial and Ferrite rod aerial. Plastic cabinet, size 10 x 6 1/2 x 3 1/2in. finished in mid-flawn with metal trim and carrying handle. Fully built and factory tested.

LASKY'S PRICE **£9.19.6**
4 U2 Batteries 3/4 extra. Post 5/-.

RUSSIAN BUILT BARGAIN THE "MICRO COS S"

7 transistors—finest Russian design and value (would cost much more if made elsewhere). Full medium waveband cover. Unique battery charger feature allows batteries to be recharged from AC mains. (Batteries last for ever). Two-colour plastic cabinet size only 2 1/2 x 2 1/2 x 1 1/2in. with fold chain. Built-in speaker, powerful volume. Ideal boys or girls pocket companion. Complete with leather zip purse, battery charger, rechargeable Batteries.

LASKY'S PRICE **69/11** Post 2/8



SPECIAL INTEREST ITEMS!

TTC B4002 FM WIRELESS MIC.

Highly sensitive—suitable for either static or mobile use. Signal can be picked up by any FM radio or tuner which receives frequencies between 96-104 Mc/s. over several hundred yards. Size only 3 x 2 1/2 x 1 1/2in. (in leather case). Operates on one PPS type battery. Complete with neck cord, clip-on dynamic extension mike (4 x 1 x 3/4in.) and battery.

LASKY'S PRICE **10 GNS.** Post Free. Anywhere in the World.

TTC 13/500. More powerful version of above—size 7 1/2 x 1 1/2 x 3 1/2in. Operates on one PPS type battery. LASKY'S PRICE **12 GNS.** Post Free. Anywhere in the World.



EXPORT TRANCEIVERS (WALKIE TALKIES)

All fully transistorised, battery operated with internal speaker and telescopic aerial. Range varies depending on power of unit and area. All complete with batteries—prices shown are for pair. Post FREE anywhere in the world.

TRANSETTE (illustrated)—size 5 1/2 x 2 1/2 x 1 1/2in. (each unit), with carrying strap. EXPORT PRICE **£6/15/0**.
FANTAVOX TE-1005—10 transistors; size 7 x 2 1/2 x 1 1/2in. (each unit). Comp. with leather case and earphone. EXPORT PRICE **25 Gns.**
AFCD CB10—10 transistors; batt. level meters; size 8 x 3 x 1 1/2in. (each unit). Comp. with earphone and wrist strap. EXPORT PRICE **29 Gns.**

STANDARD SRK-22X—size only 5 x 1 1/2 x 1 1/2in. Comp. with earphone. EXPORT PRICE **40 Gns.**

MIDLAND 13-132B—16 transistor high power model, 2 switched channels, output and batt. level meters; size 10 1/2 x 3 x 2 1/2in. (each unit). Sockets for ext. battery. EXPORT PRICE **79 Gns.**

MIDLAND 13-120B—11 transistors, 2 channel with built-in call bleep, 5 squelch control. Size 7 1/2 x 2 1/2 x 1 1/2in. Comp. with leather case and earpiece. EXPORT PRICE **£36.**



"HARADA" AUTOMATIC CAR AERIAL

Type MO-12. Heavy chrome plate 4 section motorised car aerial for 12 v. operation. Fully automatic cabin controlled extension/retraction. Extends to 40in. Complete with screened cable and fixing instructions. Absolutely universal fitting, for all cars with 12 v. electrical system.

LASKY'S PRICE **£7.19.6** Post free.

MISCELLANEOUS

NOW AVAILABLE—OUR NEW BARGAIN BULLETIN. 24 foolscap pages packed with hundreds of bargains for the "ham" and service man—exclusive to Lasky's plus full list of regular stock items. PRICE 6d. POST FREE.

TRANSISTORS

ALL BRAND NEW AND GUARANTEED

GET 81, GBT 85, GET 86 2/8; 837A, 874F 3/6; OC45, OC71, OC82D 4/6; OC44, OC70, OC76, OC81 (match pair 10/8); 5/8; AF117, OC890 5/6; OC42, OC43, OC73, OC82D 7/6; OC291, OC294, 15/-; OC296, OC298 18/6; OC28, 24/8; OC75, 8/-.

TRANSFILTERS

By BRUSH CRYSTAL CO. Available from stock.

TO-01B 485 kc/s. ± 2 kc/s. TO-02D 470 kc/s. ± 1 kc/s. TO-01D 470 kc/s. ± 2 kc/s. TF-01B 485 kc/s. ± 2 kc/s. TO-02B 445 kc/s. ± 1 kc/s. TF-01D 470 kc/s. ± 2 kc/s.

9/6 EACH
Post 6d.

COMMUNICATION RECEIVERS



all parts new and fully guaranteed. Complete with full construction data and operating manual. LASKY'S PRICE **25 GNS.**

NEW MODEL SR 150

Covers full medium waveband and 1.6-4.4 Mc/s. 4.5-11.0 Mc/s. and 11.0-30.0 Mc/s. In separate switched band spread ranges. Two aerials are fitted an internal loop and external telescopic. Controls include: B.F.O. Sensitivity, C.W., A.M.L. tone switch receiver/stand-by, S. meter. Easy to read illuminated dial with logging scale. For 200/250 v. A.C. 4 valve plus rectifier. Fitted with internal speaker and socket for phones or external speaker. Cabinet size 13 1/2 x 8 1/2 x 5 1/2in. Complete with full instruction manual.

LASKY'S PRICE **16 Gns.**

H.P. Terms available Post 10/-.

MODEL KT 320 KIT

Supplied in sub-assemblies for easy building. Covers ranges from 640 Kc/s. to 30 Mc/s. Ham Band is provided with a scale for direct reading and can also be band spread. 9 valves. Facilities: A.N.L. A.V.C. and M.V.C. Q Multiplier also serves as B.F.O. H.P. stage and two I.F. stages ensure high sensitivity and selectivity (all coils and I.F.s are supplied pre-aligned). 2 Aerial Sockets, Stand-by position for use with a transmitter S meter fitted. 200-250 v. A.C. mains. Steel cabinet, grey crackle finish. Size 15 x 8 x 10in. Dial 12 x 4in. POST Also available ready built and tested 32 Gns. FREE H.P. Terms Avail. on Kit and Built versions



STILL A FEW AVAILABLE FULLY BUILT

MODEL HE30 32 Gns. MODEL HE40 18 Gns. MODEL HE80 59 Gns.

TEST EQUIPMENT

NEW! LASKY'S CLEAR PLASTIC PANEL METERS

Precision made in Japan by HIOKI. Each meter boxed and fully guaranteed with all fixing nuts and washers. Sizes are of front panel.

Add 1/6 post on each.

TYPE KR-52 3 x 2 1/2in. (illustrated).	
1 mA DC	32/6
5 mA DC	32/6
300 V DC	32/6
500 µA	32/6
1 mA S Meter	39/6



TYPE MK-38A 2in. square	
1 mA DC	22/6
5 mA DC	22/6
300 V DC	22/6
500 µA	27/6
1 mA S Meter	29/6

TYPE KR-65 3 1/2 x 3in.	
1 mA DC	36/-
5 mA DC	35/-
300 V DC	35/-
500 µA	42/6
1 mA S Meter	39/6

TYPE MK-45A 1 1/2in. Square	
1 mA DC	25/-
5 mA DC	25/-
300 V DC	25/-
500 µA	25/-
1 mA S Meter	35/-
TYPE MK-65A 3in. Square.	
1 mA DC	36/-
5 mA DC	35/-
300 V DC	35/-
500 µA	39/6
1 mA S Meter	37/6

THE "MINI-LAB" MULTIMETER

A real mighty midget offering 7 different test facilities—ruggedly built and simple to use. Resistance 4 watt 5% tolerance, ranges 100Ω, 1K, 10K, 100Ω and 1 Megohm. Capacitance: 5 ranges .002-1 mfd. at 600 v. and 10 mfd. (electrolytic) at 360 v. RF Signal Generator: 455-700 Kc/s. at 35 mV. Audio Generator 400 c/s. at 35 mV. A.C./D.C. voltmeter: 4,000 O.P.V., ranges 0-15, 50, 150 and 600 v. RF Field Strength: 1-140 Mc/s. Impact resistant plastic cabinet size only 6 x 3 1/2 x 2 1/2in. Complete with test leads, 10in. telescopic aerial (for RF field) and battery.

LASKY'S NEW LOW PRICE **89/6**

Post 3/6.



NOMBREX TEST EQUIPMENT

MODEL 27 TRANSISTORISED SIGNAL GENERATOR (illustrated)

Wide range—150 kc/s. to 350 Mc/s. Accuracy better than 2%. Direct calibration. AF, RF and MOD. Battery operated. Light weight and strongly made. Complete with test leads and batt.

LASKY'S PRICE **£10.16.9** Post Free.

MODEL 63. Wide range AUDIO GENERATOR 10-100 Kc/s. £17/1/9 complete with battery.

MODEL 66. Wide range INDUCTANCE BRIDGE

1µH to 100H in 4 ranges. Measures Q, £18/6/9. complete with battery.

POWER SUPPLY UNIT 1 to 15 v. D.C. up to 0.1 amp. 200/250 v. AC. mains. £6.14.6

MODEL 62 RESISTANCE CAPACITY BRIDGE £9.6.9 complete with battery.



HIGH QUALITY TEST METERS

Complete with test leads and bats. POST FREE

HAKKI 20,000 O.P.V.	£5 19 6	P-1 2,000 O.P.V.	£2 12 6
TE-13 1,000 O.P.V.	£1 19 6	P-3 4,000 O.P.V.	£4 2 6
TKR-500 30,000 O.P.V.	£8 17 6	MT-559 50,000 O.P.V.	£10 19 6
200-H 20,000 O.P.V.	£5 5 0		

Complete range of Avo and Taylor Meters in stock.

LASKY'S FOR D.I.Y. CONSTRUCTION BARGAINS

P.T.O. FOR MORE NEWS


LASKY'S RADIO

CONSTRUCTORS' BARGAINS & SPECIAL INTEREST ITEMS

STOCKS ALWAYS CHANGING—1,000's OF BARGAINS

CONSTRUCTORS BARGAINS

THE SKYROVER DE LUXE



7 transistor plus 2 diode superhet, 6 waveband portable receiver covering the full Medium Waveband and Short Waveband 31-94M and also 4 separate switched band-spread ranges, 13M., 16M., 19M., and 25M., with Band Spread Tuning for accurate Station Selection. The coil pack and tuning heart is completely factory assembled, wired and tested. The remaining assembly can be completed in under three hours from our easy to follow, stage by stage instructions. Superhet, 470 Kc/s. All Mullard Transistors and Diode. Uses 4 U2 batteries. 6in. Ceramic Magnet P.M. Speaker. Easy to read Dial Scale, 500 MW Output. Telescopic Aerial and Ferrite Rod Aerial. Tone Circuit is incorporated with separate Tone Control in addition to Volume Control. Tuning Control and Waveband Selector. In a wood cabinet, size 14 1/2 x 9 1/2 x 3 1/2 covered with a washable material, with plastic trim and carrying handle. Car aerial socket fitted.

Can now be built for **£8.19.6** Post 5/- extra

H.P. Terms: 60/- deposit and 11 monthly payments of 12/8.

Total H.P.P. £10/0/3.

Data 2/8. Refunded if you purchase parcel. Four U2 bats. 3/4 extra. All components avail. sep. **★ LONG WAVEBAND COVERAGE AVAILABLE FOR THE SKYROVER DE LUXE** A simple additional circuit provides coverage of the 1100/1950M band (including 1500M, Light programme). This is in addition to all existing Medium and Short wavebands. All necessary components with construction data. Only 10/- extra. Post Free. This conversion is suitable for receivers already constructed.

LASKY'S MINIATURE TRANSISTOR AMPLIFIER MODULES

Incorporating the very latest circuitry to provide high sensitivity and good quality in conjunction with extremely small size and compactness. High quality Nernmark transistors used throughout. All designed to operate on 9v. miniature battery. Add 1/- P. & P. on each.

TYPE LRPC 1. 3 transistor. Input sens. 60mV., output 150mW, output imp. 40Ω, size 2 x 1 x 1/2 in. **PRICE 22/6**


TYPE LRPC 2. 5 transistor. Input sens. 1mV., output 330mW, output imp. 16Ω, size 2 1/4 x 1 1/2 x 1/2 in. **PRICE 22/6**

TYPE LRPC 3. 5 transistor. Input sens. 5mV., output 400mW, output imp. 16Ω, size 2 1/4 x 1 1/2 x 1/2 in. **PRICE 25/-**

TYPE LRPC 4. 5 transistor. Input sens. 180mV., output 330mW., output imp. 16Ω, size 2 1/4 x 1 1/2 x 1/2 in. **PRICE 22/6**

TYPE LRPC 5. 6 transistor. Input sens. 8mV., output 3W, output imp. 3Ω, size 3 1/2 x 1 1/2 x 1/2 in. **PRICE 59/6**

TYPE LRPC 6. Tape record/playback amp. (for use with self oscillating erase head). Output 750mW, output imp. 8Ω. Size 4 1/2 x 2 x 1 in. **LASKY'S PRICE 39/6**

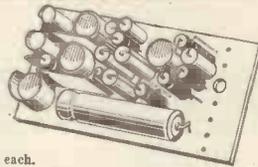

FULLY ENCAPSULATED MODULES

Special function modules—all one size 1 1/2 x 1 x 1 1/2 in. Complete with detailed function and installation instructions. Send S.A.E. for specification sheets.

TYPE PA-1. Public address amp. for use with carbon, crystal or Dynamic microphones. 3Ω output imp. **LASKY'S PRICE 30/-**

TYPE GR-1. Gramophone amp.—provides sufficient power to fill average room. 8Ω output imp. **LASKY'S PRICE 30/-**

TYPE CO-1. Morse code practice oscillator—for use with morse key and 3Ω speaker **LASKY'S PRICE 20/-**

TYPE MT-1. Metronome module—provides audible and visual beat from 30 to 240 beats per minute (for use with 3Ω speaker) **LASKY'S PRICE 22/6**

SINCLAIR SUPER MINIATURES

We stock the complete range. Write for details of package deals.

The Micro 6 miniature radio . . . £2 19 6 **THE Z-12** 12 watt amp. and pre-amp., fully built . . . £4 9 6

THE MICRO-FM (tuner/receiver) . . . £5 19 6 **STEREO 25** pre-amp. control unit, fully built . . . £9 19 6

THE X-20 20 watt P.W.M. amp. . . £7 19 6

PZ-3 POWER PACK, for Z-12. . . £3 19 6

TAPE DECK MOTORS

High quality tape deck capstan motor made by E.M.I. Holland. Bi-directional. Size 4in. dia. x 2in. high, 1in. x 1/2in. spindle.

LASKY'S PRICE 15/11 Post 3/6.



TAPE POSITION INDICATOR

Open type—as used by most makers. With re-set knob. DIGIT 7/6, 4 DIGIT 10/6, post 9d. each.

HI-FI TAPE RECORDER HEADS

1 track Stereo record/replay Tape Heads. High Imp. 8 1/2 x 7/16in. wide x 1/2in. high x 3/4in. deep. Fixing by single 8 B.A. screw. New and unused. **LASKY'S PRICE 25/-**. Post free.

SPECIAL INTEREST ITEMS 1

RECEIVE STEREO BROADCASTS NOW! THE LATEST "KUBA" IMPORTED AM/FM STEREO RADIOGRAM CHASSIS

Long, medium and short waveband coverage, plus V.H.F./P.M. Piano-key wavechange. Separate flywheel tuning on A.M. and P.M. Bass, treble and balance controls. Magic-eye tuning indicator. Ferrite rod aerial. The very latest printed circuitry. Output: 6 watts per channel. Provision for multiplex. 5 valves: line-up: ECC85, ECC83, ELL80, EAP801. Full vision tuning scale size 2 1/2 x 6in. Overall dimensions 21 x 6 1/2 x 8in. Made to the very highest standards.



LASKY'S PRICE 29 1/2 GNS. Carriage Free.

Now Available — MULTIPLEX ADAPTOR 7 GNS. extra

ARMSTRONG EQUIPMENT

All the latest models in stock—H.P. Terms available.

Model 227M	£40 1 6	127M	£29 18 9
Model 228	£31 9 0	127	£40 1 6
Model 227	£52 15 0	A.20 Stereo Amp.	£22 12 6
Model 226	£61 0 0	P.C.U. 25 Stereo Pre-amp.	£21 0 0
Model 222 Amplifier	£28 15 0	Optional cases	£3 10 0
Model 224	£25 2 3	M5 Stereo Multiplex Decoder	£14 10 0
Model 221	£35 10 0	M12 Stereo Multiplex Decoder	£15 7 6

SPECIAL PURCHASE—UHF/VHF/TV TUNERS

Well known British makers' surplus stocks. Now available for the first time to the Home Constructor. Add 2/6 Post and Packing on each.

VALVE UHF MODEL (illustrated)

In metal case, size 4 x 6 x 1 1/2 in. Fully tunable—complete with PC86 and PC88 valves. **LASKY'S PRICE** with valves 29/6. Without valves 12/6.

TRANSISTORISED UHF MINIATURE MODEL 1

Shielded metal case, size only 2 1/2 x 1 1/2 x 3in. Fully tunable—complete with two AF 139 transistors. **LASKY'S PRICE 39/6.**


TRANSISTORISED UHF TUNER MODEL 2

Shielded metal case 3 1/2 (plus spindle) x 2 1/2 x 1 1/2 in. Fully tunable with slow motion drive. Complete with two AF186 transistors and leads. **LASKY'S PRICE 25/-**

TRANSISTORISED VHF TUNER

Sub-miniature turret type fitted with 12 sets of coils and 3 Mullard AF102 transistors. In metal case, 3 x 1 1/2 x 2 1/2 in. **LASKY'S PRICE 37/6.**

TREMENDOUS BARGAIN! TV UHF TUNER AND IF AMPLIFIER PANEL



Model No. 89384 made by famous manufacturer as standard conversion unit to 625 line reception (BBC 2) for 19in. and 23in. 405 line (convertible model) Cosser, Philips, Peto Scott and Stella television receivers. The units are boxed, brand new and fully guaranteed, complete with detailed conversion and operating instructions. To effect conversion on the sets mentioned above you need only a pair of pliers and a screwdriver! The units are fitted with 7 Mullard valves—PCF80 x 2, EF185, EF184, ECC82, PC86, PC88. Size of units: tuner 7 1/4 x 4 x 8in., IF panel on 9 x 4 1/2 in. printed circuit board x 2 1/2 in. deep. Complete with all leads, screws, washers, etc. **ORIGINAL PRICE £10 10/-**

LASKY'S PRICE 49/6 Post 5/-.

TREMENDOUS VALUE IF BOUGHT ONLY FOR THE VALVES AND COMPS.

MARTIN HI-FI AUDIOKITS

Using specially developed circuits, the very latest transistors and printed circuits—these kits are all fully checked and tested before leaving the factory.

KIT 1.	5-stage Matching Input Selector Unit	LASKY'S PRICE	£2 7 6
KIT 2.	Pre-amplifier with volume control	LASKY'S PRICE	£1/17/6
KIT 3.	3-Channel Mixer, with plug-in adaptors for individually matching each circuit. Adaptors 8/6 each	LASKY'S PRICE	£3/19/6
KIT 4.	Pre-amplifier with tone/volume control stages	LASKY'S PRICE	£3 2/6
KIT 5.	10 and 3 watt Main Amplifier	LASKY'S PRICE	£5/12/6
KIT 6.	Power supply Converter Unit	LASKY'S PRICE	£2/12/6
KIT 7.	15 ohm version of Kit 5	LASKY'S PRICE	£2/12/6
KIT 8.	Power supply for Kit 7	LASKY'S PRICE	£2/15/-
UNIT 15.	FM Head	LASKY'S PRICE	£5/12/6
UNIT 16.	IF Amplifier Strip (FM)	LASKY'S PRICE	£5/7/6
UNIT 17.	Drive Assembly and Controls (FM)	LASKY'S PRICE	£1/17/6

ALL MAIL ORDERS AND CORRESPONDENCE TO OUR HEAD OFFICE:—3-15 CAVELL STREET, TOWER HAMLETS, LONDON, E.1. Tel: STE 4821/2

207 EDGWARE ROAD, W.2. Tel: PAD 3271
118 EDGWARE ROAD, W.2. Tel: PAD 9789
33 TOTTENHAM CT. RD., W.1. Tel: MUS 2605

42 TOTTENHAM CT. ROAD, W.1. Tel: LAN 2573
152/3 FLEET STREET, E.C.4. Tel: FLE 2833

All the above branches Open all day Saturday. Closed 1 p.m., Thursday

Both the above branches Open all day Thursday. Close 1 p.m. Saturday. **ALL MAIL ORDERS TO 3-15 CAVELL STREET, E.1.**



LASKY'S FOR SPEEDY MAIL ORDER SERVICE

WW-132 FOR FURTHER DETAILS

EDDYSTONE COMMUNICATION RECEIVERS

For the professional or Amateur user who likes the Best.



840C
£66

Communication receiver at a moderate price. MANUFACTURING STANDARDS OF THE HIGHEST ORDER, 8 B8A valves Superheterodyne circuit. **FREQUENCY RANGES:**

Range 1 12.4-30 Mc/s	Range 4 1.12-2.58 Mc/s
Range 2 5.2-12.9 Mc/s	Range 5480-1.150 kc/s
Range 3 2.5-0.1 Mc/s		

Ranges 4 and 5 include the International Distress Frequencies.

Model No.	Cash Price	Model No.	Cash Price
EC10	£48 0 0	EB35	£60 6 3
840C	£66 0 0	940	£133 0 0
	EA12		£185 0 0

You can pay by 9 equal monthly payments without any extra charge.

Please write for current rates. A 4d. stamp will bring you these and a full range of Eddystone Literature. THE WORLD'S FINEST SETS.

Carriage paid per passenger train. SATISFACTION GUARANTEED



SEND FOR LITERATURE TO

**The Eddystone
Specialists**

SERVICES LTD.

49/51 COUNTY ROAD
LIVERPOOL, 4

ESTAB. 1935

Telephone: AINTREE 1445

BENTLEY ACOUSTIC CORPORATION LTD.

38 CHALCOT ROAD, CHALK FARM, LONDON, N.W.1
THE VALVE SPECIALISTS Telephone PRIMROSE 9090

47 NORFOLK ROAD, LITTLEHAMPTON, SUSSEX. Littlehampton 2043

Please forward all mail orders to Littlehampton
ALL GOODS LISTED BELOW IN STOCK


OA2	5/8	10C2	12/-	DF97	10/-	EL85	7/8	PY88	7/8	MIDGET	
OB2	6/-	10D2	11/8	DH76	3/8	EL86	7/3	PY800	6/-	SILICON	
OZ4GT	4/3	10F1	5/9	DK40	10/8	EL91	2/6	PY801	6/3	RECTI-	
1A5	5/-	10F9	9/-	DK91	4/-	EL95	5/-	QP21	5/-	FIERS	
1A7GT	7/-	10P18	7/9	DK92	7/6	ELL80	14/-	QQV03/10		Type	
1C5	4/9	10P13	12/-	DK96	7/8	EL922	22/6	QV04/7	7/-	BY100	
1D5	6/6	10P14	13/-	DL54	5/-	EM71	14/-	R191	15/-	Output	
1D9	9/8	12A8	2/3	DL86	6/9	EM80	5/9	R19	34/11	250 v. at 1	
1H5GT	6/9	12A6C	8/6	DL810	10/8	EM85	11/-	R16	34/11	amp.	
1L4	2/3	12AD6	9/6	DM70	6/-	EM84	5/9	R18	9/8	No larger	
1LD5	4/-	12AE6	8/-	DM71	9/9	EM85	11/-	R19	6/9	than a shirt	
1LN5GT	6/6	12AT6	4/6	DY86	6/3	EM87	6/6	RK34	7/6	button	
1NSGT	7/6	12AT7	3/6	DY87	6/3	EY81	5/6	SP81	2/-	6/8 each	
18A	5/-	12BA6	6/9	EY82	4/6	EY81	5/6	T41	12/6	TH28A	
1T4	2/6	12AU7	4/6	EB0CC	33/-	EY83	9/3	TDD4	7/6	SISTORS	
1U4	5/6	12AV6	5/9	EB8F	24/-	EY84	9/6	TH233	6/9	AND	
1U5	5/3	12AX7	4/6	EB8CC	12/-	EY86	5/6	TP22	5/-	DIODES	
2D21	5/6	12BA8	5/3	E180CC	8/-	EY87	5/9	TP25	5/-	AA129	3/-
2X2	3/-	12BE6	4/9	E180F	17/6	EY88	5/9	TP280	7/6	AC17	14/6
3A4	3/9	12BH7	3/-	EA59	14/6	EY91	3/6	TY86P11/10		MAT130	7/-
3A5	8/-	12E1	16/9	EA76	13/-	EZ40	6/-	U12/14	7/6	AC137	9/8
3B7	5/-	12J7GT	7/3	EABC80	5/9	EZ41	6/6	U16	15/-	AC164	6/-
3D6	3/9	12K6	10/-	EAC91	3/3	EZ80	3/9	U18/20	6/6	AD140	19/-
3Q4	5/3	12K7GT	3/6	EAP42	7/6	EZ81	4/3	U19	48/6	AD149	17/6
3QG0T	6/6	12L8	17/9	EBC03	7/6	EY83	3/9	U25	5/9	AD159	13/-
384	4/3	12Q7GT	5/6	EB91	2/3	GZ33	12/6	U25	11/6	AF114	9/8
5B4GY	8/6	12S4GT6/9		EBC33	6/-	GZ34	10/-	U26	8/6	AF116	8/-
5U40	4/9	128C7	4/-	EBC41	7/3	GZ37	14/6	U31	6/6	AF116	7/-
5V40	8/-	128K7	3/-	EBC81	6/3	HABC80/3		U33	13/6	AF117	7/6
5Y3GT	4/9	128QGT8		EBF80	5/9	HL41DD		U35	16/6	AF118	18/6
6Z8	7/6	13D3	7/6	EBC88	10/6	HL42DD		U35	15/6	AF119	18/6
6Z4G	7/6	14H7	9/6	EBF89	5/9	HL42DD		U45	15/6	AF125	9/-
6A8G	5/9	1487	19/6	EBL21	10/3			U76	4/6	AF126	8/6
6A0S	2/6	19A05	7/3	EC02	4/3	HN309	26/6	U101	10/6	AF127	8/6
6A0T	5/9	20D1	10/-	EC04	6/-	HVR2	8/9	U191	10/6	AF139	27/6
6A8K	4/9	20D4	20/6	EC06	13/6	HV2A	8/9	U281	9/9	AF186	27/6
6A8M	3/6	20P2	11/6	EC08	10/6	KT33	10/6	U282	12/3	AF187	27/6
6A0S	4/9	20L1	14/-	EC91	4/-	KT36	29/1	U301	12/6	BYZ13	11/6
6AT6	4/-	20P1	17/6	EC92	6/6	KT41	19/6	U329	9/-	CG12E	4/-
6A0U	5/9	20P3	18/-	ECC31	15/6	KT44	5/6	U403	9/9	MAT100	7/9
6A8V	5/6	20P4	18/-	ECC32	4/6	KT91	12/-	U404	6/6	MAT101	8/6
6B8G	2/6	20P5	18/-	ECC39	4/6	KT93	8/6	U405	15/6	MAT102	8/6
6B8A	4/9	25B87	7/6	ECC80	2/6	KT88	28/6	U4020	6/6	MAT121	8/6
6B8E	4/6	25L6	4/9	ECC85	4/9	KTW61	4/9	UAB080	6/3	OA5	5/6
6B8H	5/3	25Z4G	6/6	ECC40	10/-	KTW62	5/6	UAP42	7/9	OA10	6/6
6B16	5/6	25Z0T2	8/-	ECC81	3/6	KTW63	5/6	UB41	10/6	OA70	3/-
6BQ7A	7/6	30C1	6/6	EC02	4/6	MHLLD612/6		UBC4	6/6	OA73	3/-
6B8T	8/3	30C5	10/6	EC04	6/-	PK14	4/6	UC81	6/6	OA79	3/-
6B8S	8/3	30C17	11/6	EC04	5/6	N37	23/3	UBF50	5/6	OA81	3/-
6B87	16/6	30C18	7/6	EC05	5/3	N78	38/4	UBF89	5/9	OA85	3/-
6B8W	7/6	30F5	10/-	EC08	8/9	N108	26/2	UBL21	10/9	OA86	4/-
6B8V	5/-	30FL1	10/-	EC189	9/-	N339	25/-	UC92	6/-	OA90	3/-
6C0	10/9	30PL12/13/-		EC007	15/-	PAC80	7/6	UC84	5/6	OA91	3/-
6C8G	28/-	30L1	5/6	EC080	7/6	PC85	6/6	UC85	6/6	OA95	3/-
6C8H	6/6	30L1	5/6	ECF82	6/6	PC88	8/6	UCF80	8/3	OA200	3/-
6CW4	11/-	30L15	12/6	ECF86	8/6	PC95	6/6	UC821	9/-	OA203	3/-
6D3	7/6	30L17	11/6	ECF804	24/-	PC97	6/3	UC82	8/6	OA210	9/6
6E5	9/6	30P4	10/-	ECH21	10/-	PC90	9/6	UC81	6/6	OA211	13/6
6F0	9/6	30P12	9/-	ECH35	6/6	PC84	5/6	UC82	7/3	OA212	13/6
6F8G	3/9	30P13	10/6	ECH42	6/6	PC85	6/6	UC83	9/-	OA220	9/6
6F13	3/9	30P11	13/6	ECH81	5/6	PC88	10/6	UF41	7/9	OA2203	9/6
6F18	7/6	30P13/13/6		ECH83	7/6	PC89	10/6	UF42	4/9	OA2304	9/6
6F23	9/-	30P14/13/6		ECH84	9/-	PCC189	8/9	UF80	6/9	OA2210	7/-
6F24	10/-	30P15/13/6		ECL80	6/-	PCF80	8/6	UF85	7/3	OC19	25/-
6F25	10/-	35A5	15/-	ECL82	8/3	PCF82	6/6	UF86	9/6	OC26	25/-
6F8E	10/6	35L6GT	6/3	ECL84	12/-	PCF84	8/6	UF89	5/6	OC33	37/6
6G3	3/-	35W4	4/6	ECL84	12/-	PCF86	6/6	UL41	8/9	OC35	10/-
6J7G	4/6	35Z3	10/-	ECL85	11/-	PCF801	10/6	UL46	9/6	OC36	8/-
6K7G	1/3	35Z4GT	4/6	ECL86	8/-	PCF8010/9		UL84	5/6	OC38	21/-
6K8G	3/3	35Z5GT	5/9	ECL800		PCF802	9/6	UM80	8/3	OC39	16/6
6K8GT	6/6	50C5	6/6	EPF	20/3	PEN45DD		VP42	12/6	OC86	25/-
6K28	24/-	50C5	3/6	EPF	30/6	PCF806	12/-	UU6	19/6	OC36	20/-
6L1	10/-	50C6G60/9		EPF2	6/6	PCF808	10/9	UU7	19/6	OC41	5/-
6L7GTM	5/6	50L6GT	6/-	EPF36	3/6	PCL81	9/9	UU8	16/6	OC42	6/9
6L18	7/6	72	6/6	EPF74	7/-	PCL82	6/6	UY1N	10/3	OC43	12/6
6LD20	6/6	80	5/3	EPF89	5/6	PCL83	8/6	UY21	9/6	OC44	4/9
6L7GT	7/-	85A2	6/6	EPF80	8/9	PCL84	8/6	UY41	5/9	OC44PM	8/3
6P28	25/-	90AG	67/6	EPF41	9/-	PCL85	8/6	UY85	4/9	OC45	3/6
6Q7G	5/-	90AV	67/6	EPF42	3/9	PCF86	8/6	VMS84	12/6	OC46M	8/-
6Q7GT	7/9	90CC	34/-	EPF50	2/6	PEN45	7/-	VP4	14/6	OC85	22/6
6R7G	5/6	90CV	33/6	EPF4	3/-	PEN43DD		VP42	12/6	OC86	25/-
684T	7/9	90C1	18/-	EPT3	5/-	VP13C		VP13C	7/6	OC71	6/6
683GT	4/8	150B2	16/6	EPF80	4/6	PEN383	9/6	VP41	5/-	OC71	3/6
68K7GT	4/6	807	11/9	EPF83	9/9	PEN463DD		VP133	9/9	OC72	8/-
68L7GT	4/9	6763	7/6	EPF85	4/6			VR	1065/8	OC73	16/-
68N7GT	4/6	A1834	20/-	EPF86	6/3	PENDD		VR150	4/9	OC74	8/-
6U4GT	9/6	AC/VP2		EPF89	4/9	4020	17/6	VR31A	7/-	OC75	8/-
6U6G	5/-	AC/TH1		EPF2	2/8	PFL20014/6		VU111	5/-	OC76	6/6
6V6GT	6/-			EPF2	2/8	PFL36	9/6	VU120	10/6	OC77	13/-
6X4	3/9	AZ1	8/8	EPF9	10/-	PL36	9/6	VU133	7/6	OC78	8/-
6X5GT	5/3	AZ31	8/8	EPF83	6/3	PL81	7/9	W76	3/6	OC81	4/-
6Y60	10/8	AZ41	6/8	EPF84	5/9	PL82	8/3	W81M	5/9	OC82	10/6
6Y80L2	8/9	B36	4/9	EPF804	20/5	PL83	6/6	W107	10/8	OC81M	4/-
7B6	12/6	B349	12/6	EH90	9/6	PL84	6/3	W729	10/8	OC82	10/6
7B7	7/-	B729	8/9	EK32	5/6	PML60	13/6	X41	10/-	OC83	5/6
7D6	6/9	BL63	10/6	ELR2	3/6	PM84	9/3	X61	6/6	OC84	6/6
7D8	15/-	CCR35	17/6	EL33	12/-	FX4	9/6	X61met12/6		OC139	12/-
7E7	5/9	CY31	7/-	EK31	3/9	FX4	9/6	X68	7/6	OC40	19/6
7R	12/6	D15	15/6	EL36	8/9	PY32	8/9	X78M	7/9	OC170	8/6
7Y4	8/-	DAF91	3/3	EL41	8/-	PY33	8/9	X78	28/2	OC201	9/-
7Z4	4/6	DAF96	6/6	EL42	7/6	PY80	5/6	X79	40/9	OC202	23/-
9B8W	6/6	DD4	10/6	EL41	8/-	PY81	5/-	X81M	29/1	OC202	23/-
9D7	7/6	DF86	15/-	EL43	6/9	PY82	5/6	X83	5/6	OC171	27/6
10C1	12/8	DF96	6/6	EL84	4/6	PY83	5/6	Z86			

SEW PANEL METERS

854 S. A. E.
for full lists. Other ranges
available. Please include postage.

—Special Quotations for Quantities

CLEAR PLASTIC METERS



Type MR.38F. 1 21/32in. square fronts.

50μA	32/6	5 amp.	22/6
50-0-50μA	29/6	5V. D.C.	22/6
100μA	29/6	10V. D.C.	22/6
100-0-100μA	27/6	20V. D.C.	22/6
200μA	27/6	50V. D.C.	22/6
500μA	25/6	150V. D.C.	22/6
500-0-500μA	22/6	300V. D.C.	22/6
1mA	22/6	15V. A.C.*	22/6
1.0-1mA	22/6	50V. A.C.	22/6
5mA	22/6	150V. A.C.	22/6
10mA	22/6	300V. A.C.	22/6
50mA	22/6	500V. A.C.	22/6
100mA	22/6	8 meter 1mA	22/6
500mA	22/6	VU meter	22/6
1 amp.	22/6		


Type MR.45P. 2in. square fronts.

50μA	39/6	20V. D.C.	25/6
50-0-50μA	35/6	50V. D.C.	25/6
100μA	35/6	100-0-100μA	39/6
100-0-100μA	32/6	500μA	35/6
500μA	27/6	1mA	35/6
1mA	23/6	5mA	35/6
5mA	25/6	10mA	35/6
10mA	25/6	50mA	35/6
50mA	25/6	100mA	35/6
100mA	25/6	1 amp.	35/6
1 amp.	25/6	5 amp.	35/6
5 amp.	25/6	10V. D.C.	35/6
10V. D.C.	25/6		

BAKELITE PANEL METERS

Type MR.65. 3 1/4in. square fronts.


25μA	65/6	50 amp.	29/6
50μA	42/6	5V. D.C.	29/6
50-0-50μA	42/6	10V. D.C.	29/6
100μA	39/6	20V. D.C.	29/6
100-0-100μA	39/6	50V. D.C.	29/6
500μA	35/6	150V. D.C.	29/6
500-0-500μA	35/6	300V. D.C.	29/6
1mA	29/6	30V. A.C.*	29/6
1.0-1mA	29/6	50V. A.C.	29/6
5mA	29/6	150V. A.C.	29/6
10mA	29/6	300V. A.C.	29/6
50mA	29/6	1 amp. A.C.*	29/6
100mA	29/6	5 amp. A.C.*	29/6
500mA	29/6	10 amp. A.C.*	29/6
1 amp.	29/6	20 amp. A.C.*	29/6
5 amp.	29/6	30 amp. A.C.*	29/6
15 amp.	29/6	60 amp. A.C.*	29/6
30 amp.	29/6	VU meter	49/6



*Moving Iron, all others moving coil.

MAGNAVOX 363 TAPE DECKS

3 speed 1 1/2-7 1/2 i.p.s.
2-track £10/10/-
4-track £13/10/-
Carr. paid.



MARTIN TAPE RECORD/REPLAY AMPS FOR 363 DECK

1-track £14/19/6
2-track £15/19/6

REUTER 1-TRACK TAPE HEADS

As fitted to Collaro Mk. IV and Studio Decks. High imp. record/play back, low imp. erase. Brand new 19/6 pair. Also Minilux 1-track, set of 3, 29/6. Braumatic 1-track, set of 2, 92/6. Post ex.

G. W. SMITH & CO. (RADIO) LTD

3-34 LISLE STREET, LONDON, W.C.2.
ALSO SEE OPPOSITE PAGE

AMERICAN RECORDING TAPES

First grade quality American tapes. Brand new and guaranteed. Discounts for quantities.



3in.	225ft. L.P. acetate	4/-
3 1/2in.	600ft. T.P. mylar	10/-
5in.	600ft. Std. plastic	8/6
6in.	900ft. L.P. acetate	10/-
5in.	1,200ft. D.P. mylar	15/-
5 1/2in.	1,200ft. T.P. mylar	35/-
5 1/2in.	1,200ft. L.P. acetate	19/6
5 1/2in.	1,800ft. D.P. mylar	22/6
5 1/2in.	2,400ft. T.P. mylar	45/-
7in.	1,200ft. Std. plastic	12/6
7in.	1,800ft. L.P. acetate	15/-
7in.	2,400ft. D.P. mylar	25/-
7in.	3,600ft. T.P. mylar	58/6

Postage 2/-. Over 23 post paid.

TWO-WAY RADIOS

SUPERB QUALITY, BRAND NEW & GUARANTEED

- 3 TRANSISTOR £6/15/- PAIR.
 - 4 TRANSISTOR £7/19/6 PAIR.
 - 5 TRANSISTOR £8/4/- PAIR.
 - 6 TRANSISTOR £9/19/6 PAIR.
 - 6 TRANSISTOR DE-LUXE LAFAYETTE £17/10/- PAIR.
 - 10 TRANSISTOR £22/10/- PAIR.
 - 13 TRANSISTOR 500 MW 2-channel 30 kns. PR.
 - 15 TRANSISTOR 1 WATT 2-channel £35 PAIR.
- POST EXTRA.



HIGH GRADE MULTIMETERS

MODEL 370-E
20,000Ω/volt D.C. volts 0.5/2.5.
10/50/250/1,000/5,000 v. A.C. volts 0.2-5/10/50/250/1,000 v. D.C. Current 0/50μA/1/10/50/250mA 1/10 amp. A.C. Current 0/250mA/1/10 amp. Resistance: 0/5k/100k/5 meg./50 megohm. £12/10/- P. & P. 3/6.

MODEL TE-12 20,000 O.P.V. 0/0.6/6/30/120/600/1,200/3,000/8,000 V. D.C. 0/6/30/120/600/1,200 V. A.C. 0/60μA/6/60/600 MA. 0/6K/600K/6 Meg./60 Meg. Ω 50 PF. 2 MFD. £5/19/6. P. & P. 3/6.

TE-51. NEW 20,000Ω/VOLT MULTIMETER
0/6/60/120, 1,200 V. A.C. 0/3/30/60/300/600/3,000 V. D.C. 0/60μA/12/300 MA. D.C. 0/60K/6 MEG. OHM 85/- P. & P. 2/6.

MODEL 250J 2,000 O.P.V. 0/10/50/500/2,500 V. D.C. 0/10/50/500/2,500 V. A.C. 0/2 Meg. Ω. -20 to +35 dB. 49/6. P. & P. 2/6.

TE-900 20,000Ω/VOLT GIANT MULTIMETER
6in. full view meter. 2 colour scale. 0/2.5/10/250/1,000/5,000 v. A.C. 0/25/12.5/10/50/250/1,000/5,000 v. D.C. 0/50μA/110/100/800 mA/10 amp. D.C. 0/2K/200K/20 MEG. OHM. £12/19/6. P. & P. 5/-.

MODEL 500 30,000 O.P.V. 0/1.5/2.5/10/25/100/250/500/1,000 V. D.C. 0/2.5/10/25/100/250/500/1,000 V. A.C. 0/50μA/5/50/500 mA. 12 amp. D.C. 0/60/K/5. Meg./60. Meg. Ω £8/17/6. Post paid.

MODEL FT-34 1,000 O.P.V. 0/10/50/250/500/1,000 v. A.C. and D.C. 0/1/100/500 mA. D.C. 0/100 KΩ 39/6. P. & P. 1/6.

MODEL ZQM TRANSISTOR CHECKER
It has the fullest capacity for checking on A, B and Ico. Equally adaptable for checking diodes, etc. Spec. A: 0.7-0.9967. B: 5-200. Ico: 0-50 microamps. 0.5 mA. Resistance for diode 200Ω + 1 MEG. Supplied complete with instructions, battery and leads. £8/19/6. P. & P. 2/6.

VARIABLE VOLTAGE TRANSFORMERS
Brand New Guaranteed — Fully Shrouded, Input 230 v. 60/60 c/s. Output 0-250 v.

1 amp.	£4/10/-	12 amp.	£19/10/-
2.5 amp.	£5/17/6	20 amp.	£32/10/-
5 amp.	£9	2.5 amp. portable metal case with meter-tuss, etc.	£9/17/6.
8 amp.	£13/10/-		
10 amp.	£17		

HEAVY DUTY AUTO TRANSFORMERS
Step up or step down. Tapped 0-115-230 volts. Brand new, Ex-U.S.A. 3,000 watt. £7/10/- Carr. 10/-, 7,500 watt, £15. Carr. 30/-.

SILICON RECTIFIERS

200 v. P.I.V. 200 mA.	2/6
200 v. P.I.V. 5 amp.	7/6
400 v. P.I.V. 3 amp.	7/6
1,000 v. P.I.V. 650 mA.	7/6
800 v. P.I.V. 500 mA.	5/6
400 v. P.I.V. 500 mA.	3/6
800 v. P.I.V. 5 amp.	7/6
70 v. P.I.V. 1 amp.	3/6
150 v. P.I.V. 165 mA.	1/-
700 v. P.I.V. 100 amp.	46/8
150 v. P.I.V. 25 amp.	19/6

Discount for quantities. Post extra.

THYRISTORS SILICON CONTROL RECTIFIERS

400 P.I.V. 3 amp.	10/-
100 P.I.V. 5 amp.	13/6
200 P.I.V. 5 amp.	15/6
400 P.I.V. 5 amp.	17/6

OS/8B/U OSCILLOSCOPES
High quality Portable American Oscilloscope. 3in. c.r.t. T/B: 3 c/s. 50 kcs. X amp.; 0-500 kcs./Y Amp.; 0-2 Mc/s. Power requirements 106-125 v. A.C. Supplied in brand new cond., fully tested. £25. Carr. 10/- Suitable 230/115 v. Trans. 15/6.

LAFAYETTE HI-FI STEREO HEADPHONES
★ Air onshored headband
★ Soft rubber ear pads
★ Frequency response, 25 to 15,000 cycles. ★ High sensitivity. Impedance 8 ohms per phone. Supplied complete with all cables, wires, overload junction box and 3-connection plug. 79/6. P. & P. 2/6.

TRANSISTORISED TWO-WAY TELEPHONE INTERCOM
Operative over amazingly long distances. Separate call and press to talk buttons. 2-wire connection. 1000s of applications. Beautifully finished in ebony. Supplied complete with batteries and wall brackets. £6/10/- pair. P. & P. 3/6.

HA-63A COMMUNICATION RECEIVER, OUTSTANDING VALUE


High class receiver covering 650 kc/s. -41 Mc/s. on 4 bands. Incorporates 7 valves plus rectifier. RF stage, illuminated 8" meter, 1.5μV sensitivity, electrical bandspread on the 80/40/20/10 and 10 metre bands, slide rule dial, aerial trimmer, BFO noise Hunter. Output for phones or speaker. Operates on 115/230/240 v. A.C. Supplied brand new and guaranteed with manual. 24 Gns. Carr. 10/-.

BARGAIN!

TYPE 13A DOUBLE BEAM OSCILLOSCOPES



A high quality instrument, offered at a fraction of original cost. Timebase 2 c/s-750 kc/s. Separate Y1 and Y2 amplifiers up to 5.5 Mc/s. Built-in calibrators at 100 kc/s and 1 Mc. Operation for 115/250 v. A.C. Available in excellent condition, fully tested and checked £22/10/- Carr. 30/-.



NOMBREX TRANSISTORISED EQUIPMENT

ALL Post Paid With Battery
Transistorised Audio Generator 10-100,000 c/s. 8 sine or square wave.

£10/15/- Transistorised Signal Generator 150 kc/s-230 Mc/s. £10/10/- Transistorised resistance capacity bridge 10-100 Meg. Ω 1 pf-100pF. £9. Transistorised Induction bridge 1 μ H-100H. £18. Mains operated Transistor power supply unit, output 1-15 v. up to 100 mA. £6/10/-.

TE22 SINE SQUARE WAVE AUDIO GENERATORS



Sine: 20 cps to 200 kc/s on 4 bands. Square: 20 cps to 30 kc/s. Output impedance 5,000 ohms, 200/250 v. A.C. operation. Supplied brand new and guaranteed with instruction manual and leads, £25. Carr. 7/6.

LAFAYETTE TE-46 RESISTANCE CAPACITY ANALYSER

2 PF. - 2,000 MFD. 2 ohms-200 megohms. Also checks impedance turns ratio, insulation, 200/250 v. A.C. Brand New £15. Carr. 7/6.



TE-20RF SIGNAL GENERATOR



Accurate wide range signal generator covering 120 kc/s-260 Mc/s. on 6 bands. Directly calibrated. Variable R.F. attenuator. Operation 200/240 v. A.C. Brand new with instructions £12/10/-.

ARF-100 COMBINED AF-RF SIGNAL GENERATOR



AF. SINE WAVE 20 - 200,000 cps Square wave 20-30,000 cps. O/P. HIGH IMP. 21 v. P/P 600 Ω 3.8 v. P/P. TF. 100 kc/s-300 Mc/s.

Variable R.F. attenuation. Int/Ext. Modulation Incorporates dual purpose meter to monitor AF output and % mod. on R.F. 220/240 v. A.C. £27/10/- Carr. 7/6.

RUH-6 REFLEX HORN

With built-in driver unit Weatherproof, rustproof, and shockproof 10 watt rating 16 ohm. 6in. dia. x 6in. length. 380-7,000 cps. Price £3/19/6. P.P. 3/6.




★ TRANSISTORISED FM TUNER ★



6 TRANSISTOR HIGH QUALITY TUNER. SIZE ONLY 6in. x 4in. x 2 1/2in. 3 I.F. stages Double tuned discriminator. Ample output to feed most amplifiers. Operates on 9 volt battery. Coverage 88-108 Mc/s. Ready built ready for use. Fantastic value for money.

£6.19.6 P. P. 2/6.

MARCONI TEST EQUIPMENT



TF-144G STANDARD SIGNAL GENERATOR. 85 Kc/s.-25 Mc/s. 200/250 v. A.C. £25. Carr. 30/-.
TF-801/A V.H.F. SIGNAL GENERATOR. 10-310 Mc/s. 200/250 v. A.C. £32/10/0. Carr. 20/-.
T.F. 195 M. BEAT FREQUENCY OSCILLATOR. 0-40 Kc/s. 200/250 v. A.C. £20. Carr. 30/-.
All above offered in excellent condition fully tested and checked and offered at a fraction of original cost.

PORTABLE OSCILLOSCOPE CT.52

A compact (8x8x16in) general purpose scope. T/B 10 c/s.-40 kc/s. bandwidth 1 Mc. Mullard DG7/5 2 1/2 CRT. For operation on 100-250 v. A.C. Supplied complete with metal transit case, strap test leads, and visor hood. Brand new and guaranteed. £22/10/- Carr. 10/- Supplied complete with instructions.



AVO CT.38 ELECTRONIC MULTIMETERS

A high quality instrument offered at a fraction of cost. Ranges A.C. and D.C. volts: 100 mV to 250 volt A.C. and D.C. current: 10 μ A to 1 amp. Watts: 50 μ W to 5 watts. Resistance: 4 ranges to 200 megohms. Operates on 110/200/250 v. A.C. 45/65 c/s. Supplied in guaranteed working order with all leads and R.F. probe. £25. Carr. 10/-.

TE-40 HIGH SENSITIVITY A.C. MILLIVOLTMETER

10 meg. input. 10 ranges: .01/.003-1/3/13/30/100/300 v. R.M.S. 5 cps-1.2 Mc/s. Decibels -40 to +50 db. Supplied brand new complete with leads and instructions. Operation 230 v. A.C. £17/10/- Carr. 5/-.



TE-65 VALVE VOLTMETER

High quality instrument with 28 ranges. D.C. volts 1.5-1,500 v. A.C. volts 1.5-1,500 v. Resistance up to 1,000 megohms. 220/249 v. A.C. operation. Complete with probe and instructions. £15. P.P. 6/-.
Additional Probes available: R.F. 35/-; H.V. 42/6.



F.M. WIRELESS MICROPHONE



84-104 Mc/s. Transistorised. Operates from 9 v. battery. Complete with additional secret tie-clip microphone. List £12/10/- ONLY £7/10/- P. & P. 2/6.

LAFAYETTE HI-FIDELITY SOLID STATE STEREO AMPLIFIERS



Latest 1967 models now available. Outstanding performance from modern semi conductors. Provision for all types of inputs and outputs and comprehensive tone controls. Attractive metal case free standing units.

Model LA-294T. 30 watt £25. Carr. 7/6.
Model LA-60T. 60 watt £37/10/- Carr. 7/6.
Details on request.

SINCLAIR AUDIO EQUIPMENT



Z12 amplifier 89/6. FZ3 P.S.U. 70/6. Stereo 25 preamp. £9/19/6. MICRO FM TUNER KIT £5/19/6. MICRO 6 RADIO KIT 59/6. MICRO AMPLIFIER KIT. 28/6. All post paid.

GARRARD RECORD DECKS

SRP12 player mono or stereo	£4 4 0
1000 changer mono or stereo	£5 19 6
2000 changer mono or stereo	£6 19 6
3000 changer mono or stereo	£8 19 6
A.50 changer mono or stereo	£7 10 0
AT6. Mk. II changer mono or stereo	£9 19 6
BP.25. player mono or stereo	£9 19 6
AT.60 changer mono or stereo	£10 19 6
A.70. changer less cartridge	£19 19 6
LA.B80 changer less cartridge	£25 0 0
401 transcription deck....	£27 6 0

All plus 5/- P.P.


R209 MK. II COMMUNICATION RECEIVER

11 valve high grade communication receiver suitable for tropical use. 1-20 Mc/s. on 4 bands. AM/CW/FM operation. Incorporates precision vernier driver, BFO. Aerial trimmer, internal speaker and 12 v. D.C. internal power supply. Supplied in excellent condition, fully tested and checked. £22/10/- Carr. 20/-.



NEW LAFAYETTE MODEL HA-700 AM/CW/SSB AMATEUR COMMUNICATION RECEIVER

8 valves, 5 bands incorporating 2 MECHANICAL-FILTERS for exceptional selectivity and sensitivity. Frequency coverage on 5 bands 150-400 kc/s., 550-1,600 kc/s., 1.5-4.0 Mc/s., 4.8-14.5 Mc/s., 10.5-30 Mc/s. Circuit incorporates R.F. stage, aerial trimmer, noise limiter, B.F.O., product detector, electrical bandspread, 8 meter, slide rule dial. Output for phones, low to 2K Ω or speaker 4 or 8 ohms. Operation 220/240 volt A.C. Size 7 1/2in. x 15in. x 10in. Supplied brand new and guaranteed with handbook 36 GNS. Carr. 10/- S.A.E. for leaflet.



R.107 COMMUNICATION RECEIVERS

Famous ex-military receiver covering 1.7-17.5 Mc/s. Operation 12 v. DC/230 v. A.C. Built in speaker, B.F.O., vernier dial etc. Offered in excellent condition £15. Carr. 30/-.



HAM-1. 4 BAND COMMUNICATION RECEIVER

4 wavebands covering 535 kc/s.-30 Mc/s., 5 valve superhet circuit. Incorporates 8 meter, BFO BANDSPREAD TUNING. BUILT-IN 4in. SPEAKER, FERRITE AERIAL AND EXTERNAL TELESCOPIC AERIAL. Operation 220/240 v. A.C. Supplied brand new with handbook. £16/16/- Carr. 19/-.



LAFAYETTE KT340 COMMUNICATIONS RECEIVER—SEMI KIT

Build this wonderful receiver and save pounds. Supplied semi-completed, main components ready mounted. RF section already wired and aligned. Full and precise instructions supplied. Specification 8 valves + rectifier, 4 bands covering 550 kc/s.-30 Mc/s. Incorporates 1 RF and 2 IF stages, "Q" multiplier, BFO, ANL, "S" meter, bandspread, aerial trimmer, etc. Operation 115/230 v. A.C. PRICE 25 GNS. Carr. 10/-.

LAFAYETTE V.H.F. RECEIVERS

HA-55A AIRCRAFT RECEIVERS. 108-136 Mc/s.-2 R.F. Stages. Built-in speaker. 115/230 v. A.C. Wonderful value. £19/7/6. Carr. 10/-.
HA-52A F.M. RECEIVER. 152-174 Mc/s. Fully tuned R.F. stage and 3 I.F. stages. Built-in speaker, 115/230 v. A.C. Wonderful value. £20. Carr. 10/-.
GROUND PLANE ANTENNA. Suitable for either of above receivers. 59/6 extra.



ALSO SEE FACING PAGE

G.W. SMITH & CO. (RADIO) LIMITED

Phone: GERRARD 8204/9155
Cables: SMITHEX LESQUARE
3-34 LISLE STREET, LONDON, W.C.2

Open 9 a.m.—6 p.m. every day Monday to Saturday. Trade supplied.

WW-134 FOR FURTHER DETAILS

Wilkinsons FOR RELAYS

P.O. TYPE 3000 AND 600
BUILT TO YOUR REQUIREMENTS—QUICK DELIVERY
COMPETITIVE PRICES—VARIOUS CONTACTS
DUST COVERS—QUOTATIONS BY RETURN

LARGE STOCKS HELD OF MINIATURE SEALED RELAYS INCLUDING HIGH SPEED
G.E.C. — SIEMENS — S.T.C. — ERICSSON — E.M.I. — BEST MAKES
25,000 IN STOCK—150 TYPES—DETAILED LIST ON REQUEST

RECTIFIER UNITS, A.C. to D.C. Input 200/250 v. A.C. Output 6 volts, 15 amps. D.C. £8/10/- Cge. 20/- Output 50 volts, 16 amps. D.C., £25. Cge. 25/- Output 110 volts, 2 amps. D.C., £5. Post 10/6.
CONSTANT VOLTAGE TRANSFORMER Input 190/250 volts. Output 230 volts, 150 watts R.M.S. £12.
MAINS TRANSFORMER. Output 300-0-300 volts, 250 mA., 6.3 volts, 9 amps. 25/- Post 6/-
AUTO TRANSFORMERS by S.T.C. Totally enclosed C-core type, 110/250 volts, 8 tappings. 50 cycles, 1,000 watts. Size 6 1/2 x 5 1/2 x 5 1/2 in., £4. Post 10/6.

HAIR HYGROMETER. 4in. round, by Negretti & Zambra, scaled 0/100 reading relative percentage humidity, 65/- Post 3/-


ONE HOLE FIXING SWITCHES
SINGLE POLE Double Throw, 3 amp. 250 v. A.C., can be used as ON/OFF or CHANGE-OVER switch.
12/- per dozen, 85/- per 100



METERS GUARANTEED. Complete list available.
 Microamps 0/100 2 1/2 in. MC 40/-
 Microamps 0/500 2 1/2 in. MC 25/-
 Milliamps 0/50 2 1/2 in. MC 35/-
 Milliamps 0/500 3 1/2 in. MC 54/-
 Amps 0/5 2 1/2 in. MC 42/6
 Volts 0/20 2 1/2 in. MC 42/6
 Volts 0/40 2 1/2 in. MC 42/6
 Volts 0/1 3 1/2 in. MC 54/-
 Volts 0/50 3 1/2 in. MC 54/-



SMALL MAGNETIC COUNTERS
 3 1/2 x 1 1/2 in., 10 counts per second with 4 figures. The following D.C. voltages are available, 6 v., 12 v., 24 v., 50 v. or 100 v.
VEEDER-ROOT MAGNETIC COUNTERS WITH ZERO RESET 800 COUNTS PER MINUTE, COUNTING TO 999,999. 2 1/2 volts A.C. or 110 v. D.C. 65/- Post 3/-
MULTICORE 5-CORE SOLDER on 1 lb. reels, containing 192ft. of 18 SWG 60/40. The cheapest way to buy solder. Price 15/- per reel, post 2/6, or 5 reels post free.

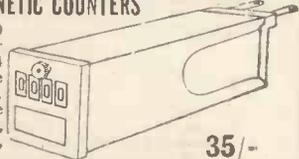

EQUIPMENT RACKS 5ft. high, £5 & POST OFFICE STANDARD. 6ft. high with U-channel sides drilled for 19in. panels, heavy angle base £7/10/- Cge. 20/-
PHOTO-ELECTRIC CELLS. 90 CV. 17/6. Post 2/-
VACUUM Condensers, 25 pf., 32 kV., 27/6, post 2/6.
MICROSWITCHES. Honeywell SPDT Sub-miniature 11SM1 6/6; Larger type with Roller BZ 7/6.
24 WAY DP WAFER SWITCHES, 12/6. Post 2/-
THERMOMETER 70-160° F., 3in. dia. panel mounted dial type, with 3ft. capillary tubing, 35/- Post 2/6.
POTENTIOMETER W.W. 1200Ω 50 watts, 20/- Post 2/- Many other types available. Send for lists.

BANK OF 5 SWITCHES in strong Bakelite case. Made for aircraft use.
SPECIAL PRICE 10/6 P.&P. 2/-


L. WILKINSON (CROYDON) LTD.
 LONGLEY HOUSE LONGLEY RD. CROYDON SURREY
 Phone: THO 0236 Grams: WILCO CROYDON

NO EXCUSES! NO DELAYS! FROM STOCK! VARIABLE VOLTAGE TRANSFORMERS

PORTABLE



Input 230 v. A.C. Output variable 0-260 v. A.C. at 1.5 amp. Fitted in beautifully finished steel case. Complete with voltmeter, pilot lamp, fuse, switch, carrying handle.
 £8/10/- P. & C. 10/-
 Also 2.5 amp. as above, £9/17/6. P. & C. 10/-




50 AMPS
 1 AMP.

INPUT 230 v. A.C. 50/60
 BRAND NEW. Carriage Paid. Buy direct from the importer, keenest prices in the country. All Types (and Spares) from 1/2 to 50 amp. available from stock.
 0-260 v. at 1 amp. £4 10 0
 0-260 v. at 2.5 amps. £5 17 6
 0-260 v. at 4 amps. £8 7 6
 0-260 v. at 5 amps. £9 0 0
 0-260 v. at 8 amps. £13 10 0
 0-260 v. at 10 amps. £17 0 0
 0-260 v. at 12 amps. £19 10 0
 0-260 v. at 15 amps. £22 0 0
 0-260 v. at 20 amps. £32 10 0
 0-260 v. at 37.5 amps. £65 0 0
 0-260 v. at 50 amps. £85 0 0


5 Amp. AC/DC VARIABLE VOLTAGE OUTPUT UNIT

Input 230 v. A.C. Output 0-260 v. A.C. Output 0-240 v. D.C. Fitted large scale ammeter and voltmeter. Neon indicator, fully fused. Strong attractive metal case 15in. x 8 1/2 in. x 6in. Weight 24 lb. Infinitely variable, smooth stepless voltage variation over range.
 Price £30 C. & P. £2.
7 Amp. A.C./D.C. Mk. II Variable Output Power Unit
 Input 230 v. A.C. Output continuously VARIABLE from 0 to 260 v. A.C. OR 0 to 230 v. D.C. at 7 a. Robustly constructed in metal case, complete with safety fuse, neon indicator, voltmeter and ammeter. Size 17in. x 12in. x 7in. Weight 36 lb. Price £39/10/- Carriage 40/-

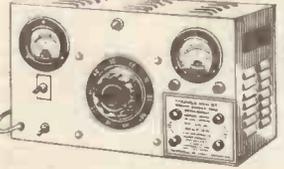

OPEN TYPES

Designed for Panel Mounting
 Input 230 v. A.C. 50/60 Output variable.
 0-260 v.
 1/2 amp. £3 3 0
 1 amp. £4 10 0
 2 1/2 amp. £5 12 6
 1 AMP. 1 AMP.



CONSTANT VOLTAGE TRANSFORMERS

Input 185-250 v. A.C. Output constant at 230 v. A.C. Capacity 250 watt. Attractive metal case. Fitted red signal lamp. Rubber feet. Weight 17lbs. Price £11/10/- P. & P. 10/-



100 WATT POWER RHEOSTATS (NEW)

Ceramic construction winding embedded in Vitreous Enamel heavy duty brush assembly designed for continuous duty. AVAILABLE FROM STOCK IN THE FOLLOWING 11 VALUES: 1 ohm 10 a. 5 ohm 4.7 a. 10 ohm 3 a.; 25 ohm 2 a.; 50 ohm 1.4 a.; 100 ohm 1 a.; 250 ohm 7 a.; 500 ohm .45 a.; 1,000 ohm 280 mA.; 2,500 ohm .2 a. Diameter 3 1/2 in. Shaft length 2 in. dia. 27/6. P. & P. 1/6.




25 WATT POWER RHEOSTATS
 10 ohm 1.5 a.; 25 ohm 1 a.; 50 ohm .75 a.; 100 ohm .5 a.; 250 ohm .3 a.; 500 ohm .2 a.; 1,000 ohm .15 a.; 1,500 ohm .12 a.; 2,500 ohm .1 a.; all at 14/6. P. & P. 1/6.

SLIDER RESISTANCES
 1.2 ohm 14 amp. 27/6; 36 ohm 6.5 to 2.8 amp. tapered winding, geared drive (less knob) 37/6; 200 ohm 1.25 amp., 37/6. P. & P. 3/6.

SWING ARM RHEOSTAT

Especially designed for educational use. 0-10 ohm in precision 1 ohm steps. Max. current 5 amp. Size Height: 19in. Width 11 1/2 in. Depth 6 1/2 in. Price £4/19/6. P. & P. 7/6.



SERVICE TRADING COMPANY

SERVICE TRADING CO

Postage and Carriage shown below are inland only. For Overseas please ask for quotation. We do not issue a catalogue or list.

LIGHT SENSITIVE SWITCHES

Kit and parts including ORP.12 Cadmium Sulphide Photocell. Relay Transistor and Circuit. Now supplied with new Siemens High Speed Relay for 6 or 12 volt operations. Price 25/-. plus 2/6 P. & P.
ORP.12 and Circuit 8/6 post paid.



A.C. MAINS MODEL

Incorporates mains transformer rectifier and special relay with 3x5 amp mains c/o contacts. Price inc. circuit 47/6, plus 2/6 P. & P.

PHOTO ELECTRONIC COUNTER

Can be set for counts of up to 500 per minute. 210-250 v. A.C. powered. Kit of Components including photo cell high speed non-resettable counter transformer relay etc. together with clear circuit diagram. £32/6, plus 3/6 P. & P. With re-settable counter. £42.6. P. & P. 3/6.

LIGHT SOURCE AND PHOTO CELL MOUNTING

Precision engineered light source with adjustable lens assembly and ventilated lamp housing to take MBC bulb. Separate photo cell mounting assembly for ORP.12 or similar cell with optic window. Both units are single hole fixing. Price per pair £2/10/- plus 3/6 P. & P.



SOLENOID OPERATED MAGNETIC RELAY

Type Sc/3944 4 pole c/o 10 amp contacts 24 volt D.C. operation. 12/6 each. P. & P. 1/6.
SIEMENS SEALED HIGH SPEED RELAYS H96A 2.2 ohm + 2.2 ohm H96G 50 ohm + 50 ohm H96C 145 ohm + 145 ohm, H96E 1,700 ohm + 1,700 ohm. All at 12/6 each. P. & P. 1/6 on each Relay. Bases 4/6 each.

P.O. RELAYS Type 3000 100 ohms 3 c/o, 2 makes, 2 break. 200 ohms, 6 c/o, 500 ohm 1 Heavy duty c/o, 500 ohm 4 Heavy duty make. 16,000 ohm, 2 make, 2 break. All at 12/6 each. 20,000 ohm, 2 Heavy duty make. Plus 1/6 P. & P.

SOLENOID. Overall length 3 1/2 in., stroke 1/2 in. to 1 in. Maximum push 8 oz. 12-24 v. D.C. operation. D.C. resistance 35 ohm. Price 8/6. P. & P. 1/6.

G.E.C. SEALED RELAYS

M1069 5,000 ohms, 2 c/o. M1087 180 ohm, 2 make, 2 break. M1092 670 ohm, 4 c/o. M1095 670 ohm, 2 m. 2 b. M1100 670 ohm, 2 c/o. Ex new equipment. M1492 670 ohm 4 c/o. All at 12/6 each, plus 1/6 P. & P.

14,000 OHM SEALED RELAY. High Speed single c/o. Platinum contacts. Super-sensitive, ideal for Transistor circuitry. Will operate on 1 milliamp. 25/-. P. & P. 1/6.

CARPENTER POLARISED RELAY. Type 5A7TR 2x1,900, turns at 55 ohms. Including Base. 25/-. P. & P. 1/6.

COMPACT HEAVY DUTY 6 volt DC RELAY

6-9 volt D.C. operation 30 ohm coil 2x10 amp, c/o contacts, will handle up to 250 volt A.C. Size 1 1/2 in. high x 2 1/2 in. Price 7/6, plus 1/6. P. & P. 3 for 20/- post paid.

LATEST HIGH SPEED MAGNETIC COUNTERS

4 figure 10 impulses per second. Type 100A, 500 ohm coil, 18-24 v. D.C. operation. Type 100B, 2,300 ohm coil, 36-48 v. D.C. operation. Any type, 15/- each, plus 1/6 P. & P.

RESETTABLE HIGH SPEED COUNTER 4 figure 1,000 ohm coil, 36-48 v. D.C. operation. £3/10/-. P. & P. 1/6.
3 figure 700 ohm coil, 24 v. D.C. £2/2/-. P. & P. 1/6.
3 figure 1450 ohm coil, £1/12/6. P. & P. 2/-.

VENNER 14-DAY CLOCKWORK TIME SWITCH 5 amp. 230 v. contact, 1 on/off every 24 h. Fitted in metal case with key. Used but guaranteed. 47/-. plus 3/- P. & P.

SEMI-AUTOMATIC "BUG" SUPER SPEED MORSE KEY.

7 adjustments, precision tooled, speed adjustable 10 w.p.m. to as high as desired. Weight 2 1/2 lb. £4/12/6, post paid. TRANSISTORISED MORSE OSCILLATOR Fitted 2 1/2 in. Moving Coil Speaker. Uses type PP3 or equiv. 9 v. battery. Complete with latest design Morse Key. 22/6, plus 1/6 P. & P.



230 v. A.C. RELAY. 2 c/o 2 amp. contacts. 9/6, ex new equip. P. & P. 1/6.

HIGH SPEED BLOWER UNIT

200/250 volt A.C. Powerful 2-speed motor, 11,000 and 13,000 R.P.M. 17/6 plus P. & P. 2/6.

AUTO TRANSFORMERS. Step up, step down. 110-200-220-240 v. Fully shrouded. New. 300 watt type £3 each. P. & P. 4/6. 500 watt type £4/2/6 each. P. & P. 6/6. 1,000 watt type £5/5/- each. P. & P. 7/6.

UNIVERSAL DEMONSTRATION TRANSFORMERS

A complete composite apparatus, comprising a robustly built Transformer and electro-magnet with removable coils and pole pieces. Coil tapped for 230 v., 220 v., 110 v., 115 v., 6, 12, 36, 110 v.

A.C. These coils are also used for D.C. experiments. Complete with all accessories as shown. £17 plus 15/- carr. Leaflet on request.

WIMSHURST ELECTROSTATIC GENERATORS £13/17/6, carr. U.K. (B.R.S.) 18/-. Leaflet on request.

230 VOLT A.C. GEARED MOTORS

Type D15G 5 r.p.m. 1.7lb inch, £2/9/6. P. & P. 3/-
Type B16G 80 r.p.m. .26lb inch, £2/2/-. P. & P. 3/-
Type D16G 13 r.p.m. 1.45lb inch, £2/17/6. P. & P. 3/-.

NICKEL CADMIUM BATTERY

Sintered Cadmium Type 1.2 v. 7AH. Size: height 3 1/2 in., width 2 1/2 x 1 1/2 in. Weight: approx. 13 ozs. Ex-R.A.F. Tested, 12/6. P. & P. 2/6.

UNISELECTOR SWITCHES

75 ohm coil. 24 v. D.C. 6 bank 25 position, 5 non-bridging, 1 bridging wiper; 5 bank 25 position, 4 non-bridging, 1 bridging wiper; 6 bank arranged to give 3 banks, 50 positions; 8 bank arranged to give 4 bank, 50 positions. These switches have been carefully removed from equipment. All at 35/- each. P. & P. 2/6.

BRAND NEW 4 Bank 25 Way Uniselector, 3 Bank + Homing, 25 ohm coil, 12-24 v. DC operation, £4/17/6 plus 2/6 P. & P.

S.T.C. SILICON POWER RECTIFIERS

RS300 Series. All types 1.5 amp. wire ended. RS310, 100 v. P.I.V. 4/- RS350, 500 v. P.I.V. 8/- RS330, 300 v. P.I.V. 6/- RS360, 600 v. P.I.V. 9/- RS340, 400 v. P.I.V. 7/- RS380, 900 v. P.I.V. 10/- 4 can be used to make 3 amp. bridge. Not Seconds. Brand New Stock. Post paid.

SPECIAL OFFER OF FIRST GRADE GUARANTEED TRANSISTORS. OC83-3 for 12/6. OC81-4 for 10/-. OC81D-4 for 10/-. OC45-3 for 10/-. OC44-3 for 10/-. Post paid.

34R SILICON SOLAR CELL 4x5 volt unit series connected, output up to 2 v. at 20 mA. in sunlight. 30 times the efficiency of selenium. As used in power Earth Satellites, 37/6. P. & P. 1/-.

"SOLAR CELL AND PHOTO-CELL EXPERIMENTERS' GUIDE"

Teaches the principles of light sensitive devices and their application. 26/-. post paid.

SENSITIVE GALVANOMETER

Centre zero 300-0-300 microamp., 90 ohm approx. Calibrated 30-0-30 in clear divisions. Mounted in sturdy sloping front case with top terminals. Price £4/10/-. P. & P. 2/6.
Matching voltmeter calibrated 0-3 v. and 0-15 v. D.C. £4/10/-. P. & P. 2/6.
D.C. Ammeter 0.6 amp. and 0.3 amp., £4/10/-. P. & P. 2/6. Set of 3 matching instruments £12/19/-. P. & P. 4/6.



MOVING COIL HEADPHONES
Finest quality soft charmois ear-muffs. Superb reproduction. Complete with jack plug. 25/6. P. & P. 2/6.
Similar with m/c microphone, with 5-way plus as used in No. 19 Sec. 30/-. P. & P. 3/-

"CABY" MULTI-RANGE TEST METER
Model B40. D.C. volt 0.5 v. 2.5 v. at 10,000 ohms per volt. Ideal for transistor circuit testing. A.C. and D.C. volt. 10 v., 50 v., 250 v., 500 v., 1,000 v. at 4,000 ohms per volt. Resistance: 2K ohm, 200 K ohm, 2 megohm, 20 megohm. Repair service available. Price includes Test Leads, Battery, Instruction book, packing and post (U.K.). Price £6/2/8. Additional models available. Leaflet sent on request.

P.O. RELAY. 2,000 ohm 2 c/o. 12/6.
Condenser 5,000 m/d 50 v. 1 1/2 in. x 4 1/2 in. 12/6. New.

L.T. TRANSFORMERS
All primaries 220-240 volts.

Type No.	Sec. Taps	Price	Carr.
1	30, 32, 34, 36 v. at 5 amps.	£3/5/0	6/-
2	30, 40, 50 v. at 5 amps.	£5/5/0	6/6
3	10, 17, 18 v. at 10 amps.	£3/10/0	4/6
4	6, 12 v. at 20 amps.	£4/17/6	6/6
5	17, 18, 20 v. at 20 amps.	£5/12/6	6/6
6	6, 12, 20 v. at 20 amps.	£5/5/0	7/5
6	24 v. at 10 amps.	£3/15/0	5/6

A.C. AMMETERS 0-1, 0-5, 0-10, 0-15, 0-20 amp. F.R. 2 1/2 in. dia. All at 21/- each.

A.C. VOLTMETERS 0-25 v., 0-50 v., 0-150 v. M.1. 2 1/2 in. Flush round all at 21/- each. P. & P. extra.
0-300 v. A.C. Rect. M-Coil 2 1/2 in. 29/-
0-300 v. A.C. Rect. M-Coil 3 1/2 in. Type W23 .. 55/-

D.C. AMMETERS
0-5 amp D.C. M.1 2 1/2 in. Rnd. 11/6
0-500 Microamp. sub-min. 1 1/2 in. dia. Scaled.
0-1 milliamp .. 21/- Postage extra.

VAN DE GRAAF ELECTROSTATIC GENERATOR, fitted with motor drive for 230 v. A.C. giving a potential of approx. 50,000 volts. Supplied absolutely complete including accessories for carrying out a number of interesting experiments, and full instructions. This instrument is completely safe, and ideally suited for School demonstrations. Price £6/6/- plus 4/- P. & P. Lft. on req.

Latest type SIEMENS MINIATURE RELAY in Transparent Case. 4 c/o 700 ohm 14/5. Base 4/-. 2 c/o 700 ohm coil, size 1/2 x 1/2 x 1 1/2 in. 15/- int. base. VARLEY TYPE VP4 (similar to illus.), 5,800 ohm, 4 c/o. New, 12/6, less base. Similar to above. Mfd. by GRUNER, 4 c/o, 2,400 ohm coil. New, 12/7, less base.

INSULATED TERMINALS
Available in black, red, white, yellow, blue and green. New 15/- per doz. P. & P. 2/-.

BUILD AN EFFICIENT STROBE UNIT FOR ONLY 37/6. We supply a simple circuit diagram and all electrical parts including the NSP2 Strobe tube which will enable you to easily and quickly construct a unit for infinite variety of speeds, from 1 flash in several seconds to several thousands per minute. 37/6 plus 3/- P. & P.

20-WAY STRIP containing standard Post Office telephone Jack Sockets. Overall size 1 1/2 in. x 3 1/2 in. NEW PRICE 15/- each. P. & P. 2/6.

INSULATION TESTERS (NEW)
Test to I.E.E. Spec. Rugged metal construction, suitable for bench or field work, constant speed clutch. Size L. 8 in., W. 4 in., H. 6 in. Weight 6 lb. 500 volt, 500 megohms. Price £22 carriage paid. 1,000 volts, 1,000 megohms, £28 carriage paid.

NEW SOUND POWER OPERATED EX-AUDIRALTY HEAD AND BREAST SETS
Two such sets connected up will provide perfect intercom. No batteries required. Will operate up to 1/2 mile. Price 17/6 each plus P. & P. 4/6 or 32/6 per pair. P. & P. 6/-.



ALL MAIL ORDERS. ALSO CALLERS AT:
57 BRIDGMAN ROAD,
LONDON, W.4. Phone: 995 1560
Closed Saturdays.

SHOWROOMS NOW OPEN
Many Bargains for the caller.
AMPLE PARKING

PERSONAL CALLERS ONLY
9 LITTLE NEWPORT STREET,
LONDON, W.C.2.
Tel.: GER 0576



STOCKISTS




MULTIMINOR MK. IV

**REPAIR SERVICE
7-14 DAYS**

We specialise in repair, calibration and conversion of all types of instruments, industrial and precision grade to BSS.89.

Release notes and certificates of accuracy on request.

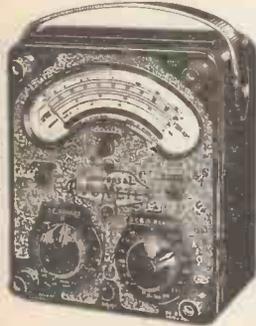

MODEL S MK. III

Suppliers of Elliott, Cambridge and Pye instruments

LEDON INSTRUMENTS LTD

76-78 DEPTFORD HIGH STREET, LONDON, S.E.8

Tel.: TIDeway 2689

E.I.D. & G.P.O. APPROVED

CONTRACTOR TO H.M. GOVT.

**VALVES SAME DAY SERVICE
NEW! TESTED! GUARANTEED!**

SETS 1R5, 1S5, 1T4, 3B4, 3V4, DAF91, DF91, DK91, DL92, DL94.
Set of 4 for 18/-, DAF96, DF96, DK96, DL96, 4 for 24/6.

1A7GT 7/6	10C2 11/6	DK32 7/9	EF183 6/9	PL36 9/2	UCL83 8/9
1H5GT 7/3	10F1 9/9	DK91 4/9	EF184 6/-	PL81 6/9	UF41 8/-
1N5GT 7/9	10P13 8/8	DK92 8/-	EL32 6/6	PL82 6/8	UF80 7/6
1R5 4/9	12AT7 3/9	DK96 6/6	EL41 8/6	PL83 6/-	UF89 5/9
1R4 4/9	12AU6 4/9	DL33 6/9	EL42 7/9	PL84 6/3	UL41 8/9
1R9 3/9	12AU7 4/9	DL35 5/-	EL84 4/9	PL500 13/6	UL84 20/-
1T4 2/9	12AX7 4/9	DL92 4/9	EL95 5/-	PL801 7/6	UL84 5/9
3A5 7/-	12K7GT 3/6	DL94 5/6	EM80 5/9	PX35 7/9	UY21 8/9
3Q4 5/6	12K8GT 7/9	DL96 6/-	EM81 7/3	PY31 6/6	UY41 4/9
3S4 4/9	20P1 10/6	DY86 6/6	EM84 5/9	PY32 8/6	UY85 4/9
3V4 5/6	20L1 14/-	DY87 6/6	EM87 6/6	PY33 8/6	VP4B 11/-
5U4G 4/6	20P1 9/-	RABC80 6/-	BY51 6/3	PY80 5/3	VP1321 21/-
5V4G 7/9	20P3 9/-	BAF42 7/6	BY86 6/-	PY81 5/3	W76 3/6
5Y3GT 5/-	20P4 13/6	EB41 4/-	EZ40 6/3	PY82 5/-	W77 2/9
6Z4G 7/-	25UAGT11/6	EB91 2/3	EZ80 3/9	PY83 5/9	Z77 3/6
6Z0L2 9/6	30C15 10/6	EB33 7/-	EZ81 4/6	PY88 7/3	
6AL5 2/3	30C17 11/6	EB41 7/9	GZ32 9/-	PY800 6/6	Transistors
6AM6 3/6	30F5 9/9	EBF80 6/-	KT61 6/6	PY801 6/6	AC107 10/-
6AQ5 5/6	30FL1 10/6	EBF89 5/9	N18 5/8	R19 7/7	AC127 7/6
6AT6 4/-	30L15 11/-	EC81 3/9	N78 14/9	B20 12/9	AD140 15/6
6BA6 4/6	30L17 12/-	EC82 4/9	PC86 9/-	U25 9/-	AF102 13/-
6BE6 4/3	30P4 11/6	EC83 7/-	PC88 9/-	U26 8/9	AF115 6/9
6BJ6 6/9	30P12 9/9	EC84 6/3	PC97 5/9	U47 8/6	AF116 6/9
6BW6 7/3	30P19 11/6	EC85 5/6	PC900 8/9	U49 9/8	AF117 5/9
6P1 7/9	30P11 12/9	ECF80 7/6	PC884 5/6	U52 4/6	AF118 13/6
6P13 3/6	30P13 11/9	ECF82 6/9	PC895 9/9	U78 3/6	AF124 9/-
6P14 9/-	35L4GT 6/3	ECF85 9/-	PC189 8/6	U121 10/6	AF125 8/6
6P23 9/9	35W4 4/6	ECF85 6/-	PCF80 6/6	U301 11/9	AF126 8/-
6K7G 1/6	35Z4GT 4/6	ECF82 9/-	PCF82 6/9	U301 16/3	AF127 8/-
6K8G 4/3	85A2 5/9	ECF81 5/-	PCF86 8/3	UABC80 5/9	OC22 17/6
6K8GT 7/8	6063 12/6	ECF84 8/6	PCF800 10/6	UAF42 7/9	OC25 9/6
6L15 7/8	AZ31 9/-	ECF80 6/-	PCF801 6/9	UBC41 6/9	OC28 6/9
6Q7G 5/6	B86 4/6	ECF82 6/3	PCF802 9/6	UBF80 6/-	OC44 4/3
6V6G 3/6	B729 10/-	ECF86 7/9	PCF805 9/9	UBF89 5/9	OC46 3/6
6V6GT 6/6	DAC32 7/3	EF39 3/9	PC182 6/9	UBL21 9/-	OC71 3/6
6X4 3/6	DAF91 3/9	EF41 6/3	PC183 8/6	UC92 5/6	OC72 4/9
6X5GT 5/9	DAF95 6/-	EF80 4/9	PCL84 7/6	UC884 7/9	OC75 5/9
7B6 10/9	DF90 7/-	EF85 5/-	PCL85 8/3	UC885 6/6	OC81 3/8
7B7 7/-	DF33 7/9	EF86 6/3	PCL86 8/6	UCF80 8/3	OC81D 3/8
7C5 9/6	DF91 2/9	EF89 5/-	PEN44 6/9	UCH21 9/3	OC82 5/9
7C6 6/9	DF96 6/-	EF91 3/6	PEN38C15/-	UCH42 8/9	OC82D 5/6
7H7 5/6	DH77 4/-	EF92 2/9	PEN383 9/6	UCL81 6/-	OC82D 5/6
7Y4 6/6	DH81 12/6	EF97 7/6	PFL200 14/-	UCL82 7/-	OC170 5/6

READERS RADIO

85 Torquay Gardens, Redbridge, Ilford, Essex. CRE 7441

Postage on 1 valve 9d. extra. On 2 valves or more, postage 6d. per valve extra. Any Parcel Insured against Damage in Transit 6d. extra.

WHY NOT BUILD ONE OF OUR PORTABLE TRANSISTOR RADIOS...

NEW MELODY MAKER SIX

* 8 stages. Six transistors and two diodes. Covers medium and Long Waves and Extra Band for EASIER tuning of LUXEMBOURG, etc. Top grade 3in. Loudspeaker for quality output. Two R.F. stages for extra boost. High 'Q' 6in. Ferrite Rod Aerial. Approx. 350 Milliwatts push-pull output. Handcarried pocket size case with gilt fittings. Size 6 1/2 x 3 1/2 x 1 1/2 (Uses long-life PPG battery). Carrying strap 1/6 extra. This amazing receiver may be built for only

£3.9.6 P. & P. 3/6.

Parts price list and easy build plans 2/- (Free with kit)




TRANSONA FIVE NOW WITH 3in. SPEAKER!

* 7 stages—5 transistors and 2 diodes.

Covers M. and L. Waves and Trawler Bands. Incorporating ferrite rod aerial, tuning condenser, volume control, and new type fine tone super dynamic 3in. speaker, attractive case. Size 6 1/2 x 4 1/2 x 1 1/2 in. approx.

Total cost of all parts NOW ONLY **42/6 P. & P. 3/6.**
Parts price list and easy build plans 2/- (Free with kit).




NEW! ROAMER SEVEN Mk. IV.

7 WAVEBAND PORTABLE OR CAR RADIO
AMAZING PERFORMANCE AND SPECIFICATION
* NOW WITH PHILCO MICRO-ALLOY K.P. TRANSISTORS.

* Fully tunable on all wavebands.
* 9 stages—7 transistors and 2 diodes.
Cover M. and L. Waves. Trawler Band and three Short Waves to approx. 15 metres. Push-pull output for room-filling volume from rich toned 7in. x 4in. speaker. Air spaced ganged tuning condenser. Ferrite rod aerial for M. & L. Waves and telescopic aerial for S. Waves. Real leather look case with gilt trim and shoulder and hand straps. Size 9 x 7 x 4in. approx. The perfect portable and the ideal car radio (Uses PP7 batteries available anywhere).

* Extra band for easier tuning of LUXEMBOURG, etc.
Total cost of all parts NOW ONLY **£5.19.6 P. & P. 5/6.**



Parts price list and easy build plans 3/- (Free with kit).

All components used in our receivers may be purchased separately if desired. Parts price lists and easy build plans available separately at price stated. OVERSEAS POST 10/-.

● SEND S.A.E. for list of COMPONENT BARGAINS ●

RADIO EXCHANGE

61 HIGH ST., BEDFORD. 'Phone: 52367

Callers side entrance Barretts Shoe Shop. Weekdays 9-5 p.m. Sats. 9-12.30

*facts
at your fingertips...*

**Electrical & Electronic
Trader**

YEAR BOOK 1967

All the information you need in one compact, quick reference volume—the standard trade directory for radio and electrical dealers, service engineers. This completely up-to-date year book includes: Directory of principal trade organisations: Official addresses: Leal guide: Rates of pay: Valve data: specifications: Wholesalers: Proprietary names directory: Buyers' guides: Trade addresses, etc.

35s. net by post 36s 9d 514 pp.

obtainable from leading booksellers

Published for ELECTRICAL & ELECTRONIC TRADER

ILIFFE Books Ltd.

DORSET HOUSE STAMFORD STREET LONDON SE1

VARIABLE VOLTAGE TRANSFORMERS

WORLD FAMOUS "SLIDE-TRANS" AVAILABLE ONLY FROM I.M.O.

★ RATED CURRENT CONSISTENT AT ALL POINTS ALONG THE WINDING



Output: 0-260 V. Input: 230 V.
A.C. 50/60 c.p.s. Shrouded fully
variable transformers for bench
or panel mounting.

1 Amp.	£4.10.0
2.5 Amp.	£5.17.6
5 Amp.	£9.0.0
10 Amp.	£18.5.0
20 Amp.	£32.10.0

Inset shows latest type brush Gear providing 1 volt variation.

C. & P. extra.

CONSTANT VOLTAGE TRANSFORMERS

BEAT WINTER! AUTOMATIC MAINS STABILISER

ONCE AGAIN WE CAN EXPECT THE USUAL VOLTAGE DROPS DUE TO THE COLD WEATHER

★ No Attention
★ No Maintenance
★ No Moving Parts
★ Corrected Wave

Input: 190-270 v. A.C.
Output: 240 v. A.C.
Accuracy: ±1%.
Capacity: 250 watts.

Maintain "spot-on" test-gear readings at all times.
Weight: 21 lb. Fitted
signal lamp and switch.
Size 11 x 6½ x 6in. high.

£12.10.0

C. & P. 20/-



TRANSISTORISED MEGOHMMETER



★ **PUSH
BUTTON
TO READ**

500v.-1000 Megohms.
Superb portable in-
strument. Supplied
c/w batteries, probes
and carrying case.

ONLY **£25.0.0**
C. & P. 7/6




30 Amp. L.T. SUPPLY UNIT

0 TO 18 v. D.C. WITH SMOOTH
STEPLESS VARIATION
Designed for CONTINUOUS
use at max. loading.

★ Fitted voltmeter and ammeter.
★ Instantaneous overload cut-out
Input: Mains A.C.
Robust construction.
2 tone grey hammer finish. Steel
case.

£55.0.0 C. & P. 40/-
G.B. (Inland)
ENTIRELY SUITABLE FOR PLAT-
ING PLANTS, LABORATORY
SUPPLIES, ETC.

20 Amp. L.T. SUPPLY UNIT

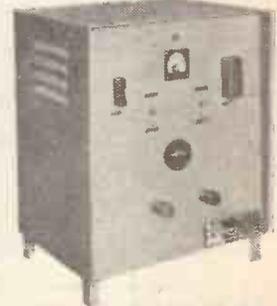

36ft. AERIAL MASTS


NEW LATEST PATTERN
TUBULAR MAST

Check these vital points:

- ★ Made from 6 x 1½ in. dia. Sher-
dized steel sections, for dura-
bility and strength.
- ★ Extra strong locating base.
- ★ Top cap with fitted pulley and
halyard.
- ★ 2 sets (8) Rotproof Guys.
- ★ Rustproofed Steel Picketing
Stakes.

ONLY **£15.0.0** ex
works

Carr. 20/- Returnable wood case,
30/-.

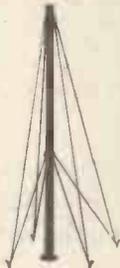

PORTABLE TRANSISTOR TESTER

SUITABLE FOR PRODUCTION & LABORATORY USE

SPECIFICATION.

Alpha 0.7 to 0.997
Beta 5-300.
ICO 0-50µA. 5mA.
Capable of measuring
GERMANIUM AND
SILICON DIODES.
DESIGNED WITH RE-
DISTANCE SCALE 200
ohms to 1 Megohm as
an ADDED FEATURE.
Housed in heavy duty
plastic case, c/w internal
battery.



Only **£7.15.0** Plus 7/6 C. & P.

LATEST DESIGN HEAVY DUTY 12/24 VOLT D.C.

AS SUPPLIED TO MIN. OF DEF. AND R.N.L.I.
Output: Adjustable up to 20 amps.
CONTINUOUS at 12/24 volts.
Input: 220/230/240 v. A.C. 50 cycles.
FULLY FUSED, Neon indicator,
0-20 amp meter. Size 16 x 12 x 20in.
high, in heavy gauge steel cabinet.
Grey Hammer finish. — Weight:
50 lbs.
ONLY **£32.10.0** Plus 40/-
C. & P.
CURRENT PRODUCTION G.B. (Inland)
BUY DIRECT FROM MANUFACTURER.

IMMEDIATE DESPATCH FULL SPARES AND SERVICE AVAILABLE

VARIABLE HIGH VOLTAGE SAMPLING TESTER


DIELECTRIC BREAKDOWN TESTER

- ★ Range: Infinitely variable up to 3,000
volts. 0.1 amp.
- ★ Entirely suitable for continuous testing.
- ★ Automatic safety cut-out. Input:
Mains voltage. Input and test leads
with clips.

Model T30 **£15**

PORTABLE VARIABLE A.C. POWER SUPPLY UNIT

Designed for engineers
whose requirements
call for a visual indi-
cation of volts applied.
OUTPUT:
0-260 v. 1½ amps.
INPUT:
230 v. A.C. 50/60 c.p.s.
Fitted with fuse, volt-
meter, safety indicator,
on-off switch and lead.
Size 8 x 5 x 5in. high.



PRICE **£8.17.6** C. & P. 12/6

5 AMP. A.C. & D.C. VARIABLE SUPPLY UNIT



Specification:

Output: 0-260 v. A.C.
0-240 v. D.C.

- ★ Smooth stepless voltage vari-
ation from 0-Max.
- ★ Current consistent throughout
the controlled range.
- ★ Ammeter and voltmeter fitted,
and Neon indicator.
- ★ Fully fused input and output.

Strong steel case with carrying handle and rubber feet.
11 x 7 x 14in. high. MADE IN ENGLAND.

PRICE **£30.0.0** C. & P. 40/-
Gt. Britain (Inland)

I.M.O.
(ELECTRONICS) LTD.

(Dept. W.W.1.) 313 Edgware Road, London, W.2. PADDINGTON 2233/4

TRS BARGAINS IN MODERN QUALITY KITS, COMPONENTS AND EQUIPMENT

TRS F.M. STEREO DECODER OUTSTANDING TRS VALUE

This outstanding kit is based on the highly successful Mullard design and uses 6 Transistors on a printed circuit size 5½ in. x 2½ in. A 2-stage transistor Stereo Beacon indicator is incorporated. Requires a 12 v. supply.

Earth is negative.

Basic Kit supplied is suitable for Transistor Tuner input and Transistor Amplifier output. With simple mods (data supplies with Kit) this unit easily adapted for use with Valve Tuners and Valve Amplifiers.

Kit and assembly instructions complete with Mullard specified inductors Type WF2949 and WF2951.

£4.19.6 with coils **£5.5.0**
pre-aligned

Packing and postage either model 2/6

TRANSISTOR KITS FOR STEREO

PEAK SOUND SA 8-8 Sensational value high quality 14 transistor stereo amp for good ceramic and crystal pickups. 16-17 watts. output into 5 ohm speakers. Uses 'Cir-Kit' Augers can assemble it. Separate treble and bass boost and cut controls. Easy to follow instructions with unique 'Cir-Kit' Shadow Template. Complete down to last screw, £12.19.6 Peak Sound Power Pack for above. £3/15/-.

SINCLAIR Z12 Combined amp and pre-amp. 12 watts r.m.s. into 1.5 ohm load Suitable for any loudspeaker. Two can be used in stereo. Price, each, assembled 8/6

SINCLAIR STEREO 25 combined high sensitivity pre-amplifier and control unit, with smart two-tone aluminium front. Ideal for two Z.12's. Assembled £9.19.6
PZ3. Power pack for two Z12's and stereo 25, at £3.19.6

MULLARD Four watt popular stereo amplifier in course of preparation together with special TRS pre-amplifier available very shortly S.A.E. brings details.

TRS KITS FOR MULLARD AMPLIFIERS

MULLARD "3-3" 3-valve Hi-Fi quality at reasonable cost. Bass Boost and Treble controls, quality sectional output transformer (3 and 15 ohms), 40 c/s-25 kc/s. ± 1 dB. 100 mV. for 3W., less than 1% distortion. Bronze escutcheon panel. Complete Kit only £7/10/-. Carr. 5/-. Wired and tested £9/10/-.

MULLARD "5-10" 5 valves 10 W., 3 and 15 ohms output. Mullard's famous circuit with heavy duty ultra-linear quality output tfr. Basic amplifier kit price, £9/19/6. Carr. 7/6. Ready built 11/ Gns.

2 valve pre-amp. Mullard Circuit. £6/12/6 (P. & P. 5/6). Assembled £8/10/-.

TRS SIX VALVE AM/FM TUNER UNIT

Med. and VHF 190m-550m., 86 Mc/s.-103 Mc/s. 6 valves plus metal rectifier. Self-contained power unit A.C. 200/250 v. operation. Magic-eye indicator, 3 push-button controls, on/off, Med., VHF. Diodes and high output sockets with gain control. Illuminated 2-colour perspex dial 1½ in. x 4 in. chassis size 1½ in. x 4 in. x 5½ in. A recommended Fidelity Unit for use with all good hi-fi and amplifier systems. Carr. 12/6 Ditto less Power Pack, Bargain Price. Complete kit of parts, inc. £9/19/6. Carr. 12/6 Circuit and Power Pack as illustrated, £10/19/6.



GARRARD UNITS AND PLINTHS

LM.3000. Autochanger with 9TA stereo cartridge. **8 gns.**

AT60 AUTOCHANGER DE-LUXE. With 12in. cast turntable, less cartridge. **9½ gns.**

SP.25 DE LUXE. Single playing unit. Less cartridge. Carr. and packing on any of above 7/6. **9½ gns.**

GARRARD PLINTH. Suitable for use with any of the units here. Complete with plastic cover (Carr. and pack., 5/-).

GARRARD CARTRIDGES. All types available. Post free from Mono at 15/- to Stereo from 25/-.

We stock Sapphire and Diamond Styl for most pick-ups at attractive prices. **25/-**

£3.12.6

25/-

TRS DE-LUXE RECORD PLAYER KIT

Incorporating 4 Sp. Garrard Auto-Slim unit and Mullard latest 3-watt printed circuit amplifier (ECL86 and EZ80), vol., bass and treble controls, with 8 x 5 in. 10,000 line speaker. Contemporary styled two-tone cabinet, charcoal grey and off-white with matching blue relief. Size 17½ in. x 16 in. x 8 in. A stylish unit capable of quality reproduction. Circuit and const. details 2/6 (free with kit).



COMPLETE KIT £13.19.6

Carr. and ins. 12/6.


Ready wired 30/- extra.

Illuminated Perspex control panel escutcheon 7/6 extra. 4 contemporary mounting legs, 6 in., 10/6; 9 in., 11/6; 12 in., 12/6 per set extra.

TRS 7 VALVE AM/FM RADIOGRAM CHASSIS

Valve line-up ECC85, ECH81, EF89, EABC80, EL84, EM81, EZ80.

Three Waveband and Switched Gram. positions. Med. 200-550 m. Long 1,000-2,000 m. VHF/FM 88-95 Mc/s. Philips Continental Tuning Insert with permeability tuning on FM and combined AM/FM IF transformers. 400 Kc/s. and 10.7 Mc/s. Dust core tuning all coils. Latest circuitry including AVC and Neg. Feedback. Three watt output. Sensitivity and reproduction of a very high standard. Chassis size 13½ x 6½ in. Height 7½ in. Edge illuminated glass dial 1½ x 3½ in. Vertical pointer. Horizontal station names. Gold on brown background. A.C. 200/250 v. operation. Magic-eye tuning. Circuit diagram now available. Aligned and tested ready for use £13/19/6. Carr. & Ins. 8/6. Comp. with Tape, output, ext. spkr and P/U sockets and indoor P.M. aerial and 4 knob—walnut or ivory to choice. 3Ω P.M. Speaker only required. Recommended Speakers 10 in. R.A. 30/- 13½ x 8 in. E.M.I. Fidelity, 42/6. 12 in. R.A. with conc. Tweeter, 42/6. Carr. 2/6.

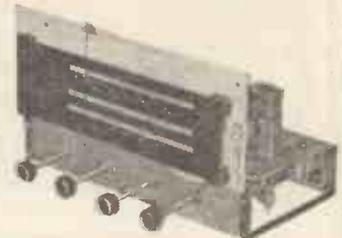

1%, 5%, 10% RESISTORS IN PREFERRED VALUES ALWAYS IN STOCK FROM 3d Ea.

VOLUME CONTROLS—5K-2 Meg. ohms. 3 in. spindles. Morganite Midget Type 1½ in. diam. (dur. 1 year. LOO or 1½ in. radius less Sw. 3/6. DP. Sw. 6/-). Twin Stereo less Sw. 7/6. 100K to 2M ohms with DP Sw. 9/6.

STEREO BALANCE CONTROLS. Log/Anti-Log 5K, 1 or 2 Meg., 9/- ea.

TAPE BARGAINS

1,500FT. 7 in. REEL. American professional quality 1½ hrs. playing per track at 3½ r.p.m. With leader and stop folia. In sealed boxes. Outstanding value at 17/6 per reel (p. & p. 1/- for one, 6d each, after first ordered at same time).

UNIQUE DOUBLE SIDED TAPE on 3½ in. reels. Superb used in normal way. Ideal for experimenters too. 650ft. 9/-; 600ft. 8/6 (p. & p. 1/- per single reel, 6d. for each additional).

EMPTY TAPE REELS (Plastic). 3 in., 1/3; 4 in., 2/-; 5 in., 2/-; 5½ in., 2/-; 7 in., 2/3

PLASTIC REEL CONTAINERS (Cassettes). 3 in., 1/3; 5 in., 1/9; 5½ in., 2/-; 7 in., 2/3.

"CIR-KIT FOR BUILDERS"

The new wonder medium for making circuit boards. Kit No. 3 includes 12 in. x 6 in. laminate board, 15ft. (approx.) 4 in. adhesive copper strip and 6 in. x 4 in. adhesive sheet. Price 15/-; 15ft. x ½ in. strip or 25ft. x ¼ in. strip or 12 in. x 6 in. sheet—9/-.

SINCLAIR KITS

We stock full range of these famous kits as advertised.

- MICROMATIC Revr. kit. 59/6
- Ready built 79/6
- Z.12 combined amp. and pre-amp. built 89/6
- MICRO FM Pocket 7 Transistor tuner/pocket receiver £5/19/6
- STEREO 25 Pre-amp. £9/19/6
- PZ.3 Power Pack £3/19/6

WAVECHANGE SWITCHES. 1 p. 12-way. 2 p. 2-way. 2 p. 6-way. 3 p. 4-way. 4 p. 2-way. 4 p. 3-way. long spindle. 3/6 ea.

TYGAN FRET or Vynair sprk. fabric, 12 x 12 in., 2/-; 12 x 18 in., 3/-; 12 x 24 in., 4/-, etc.

BONDACOUST Speaker Cabinet Acoustic Welding, approx. 1 in. thick, 18 in. wide, any length cut, 2/3 (ft. 6/- yd. EXPANDED ANODIZED METAL. Attractive gilt finish 1 x ¼ in. diamond mesh, 4/6 sq. ft. Multiples of 6 in. cut. Max. size 4 x 3ft., 47/6 plus carr.

ENAMELLED COPPER WIRE 2 oz. reels. 14 g.-20 g., 3/-; 22 g.-28 g., 3/6; 30 g.-34 g., 4/3; 36 g.-38 g., 4/9; 39 g.-40 g., 5/-, etc.

TINNED COPPER WIRE—16-22 g., 4/- 2 oz. VEROBOARD—All sizes including 2½ in. x 5 in. 3/8; 2½ in. x 3½ in., 3/-; 3½ x 5 in., 5/2; 3½ in. x 3½ in., 3/8; 3½ in. x 17 in., 12/6. All accessories and tools in stock.

A UNIQUE TRANSFORMER MANUFACTURING SERVICE We manufacture all types Radio Mains, Transf. chokes. Quality Op. Trans., etc. Enquiries invited for specials, prototypes for small production runs. Quotations by return.

ORDERING

Send cash with Order or pay C.O.D. Please mention "Wireless World."

PACKING AND CARRIAGE:
1 lb. 1/-; 1 lb. 1/9;
2 lb. 3/6; 6 lb. 5/-;
10 lb. 6/6.

A GOOD WAY TO SPEND **3d.**

Send 3d. stamp for our latest lists (Dec. 66), packed with masses of items at bargain prices.


TRS RADIO

70 BRIGSTOCK ROAD, THORNTON HEATH, SURREY

Tel.: THO 2188. Hours 9 a.m.—6 p.m. 1 p.m. Wednesdays
A few doors from Thornton Heath Stn. (S.R. Victoria section.)

COMPONENT SPECIALISTS
Established 1946

3-VALVE AUDIO AMPLIFIER MODEL HA34



Designed for Hi-Fi reproduction of records. A.C. mains operation. Ready built on plated heavy gauge metal chassis, size 7 1/2 in. w. x 4 in. d. x 4 1/2 in. h. Incorporates ECC83, EL84, E280 valves. Heavy duty, double wound mains transformer, and output transformer matched for 3 ohm speaker, separate base, treble and volume controls. Negative feedback line. Output 4 1/2 watts. Front panel can be detached and leads extended for remote mounting of controls. The HA34 has been specially designed for us and our quantity order enables us to offer them complete with knobs, valves, etc., wired and tested for only £24/5/- P. & P. 6/-.

ESL "FOUR" AMPLIFIER KIT

3-VALVE, 4 WATT USING EC083, EL84, E280 VALVES for A.C. mains 200/240v. Special features include: ★ Heavy duty double-wound mains transformer with electrostatic screen. ★ Separate bass, treble and volume controls, giving fully variable boost and cut with minimum insertion loss. ★ Heavy negative feedback loop over 2 stages ensure high output at excellent quality with very low distortion factor. ★ Suitable for use with guitar, microphone or record player. ★ Provision for remote mounting of controls or direct on chassis. ★ All this builds on to a chassis size only 7 1/2 in. wide x 4 in. deep. Overall height 4 1/2 in. ★ All components and valves are brand new. ★ Very clear and concise instructions enable even the inexperienced amateur to construct with 100% success. ★ Supplied complete with valves, output transformer (3 ohms only), screened lead, wire, nuts, bolts, solder, etc. (No extras to buy). PRICE 79/6. P. & P. 6/-.


Comprehensive circuit diagram, practical layout and parts list 2/6 (free with kit). This kit is similar in appearance to HA34 but employs entirely different and advanced circuitry.

QUALITY RECORD PLAYER AMPLIFIER, MK. II
A top quality record player amplifier employing heavy duty double wound mains transformer, EC083, EL84, E280 valves. Separate bass, treble and volume controls. Complete with output transformer matched for 3 ohm speaker. Size 7 1/2 in. w. x 3 1/2 in. d. x 6 1/2 in. h. Ready built and tested. PRICE 89/6. P. & P. 6/-.

ALSO AVAILABLE mounted on board with output transformer and speaker ready to fit into cabinet below. PRICE 89/6. P. & P. 7/6.

DE LUXE QUALITY PORTABLE R/P CABINET
Uncut motor board size 14 1/2 in. x 12 in., clearance 2 in. below, 5 1/2 in. above. Will take above amplifier and any B.S.T. or GARRARD Autochanger or Single Play Unit (except AT70 or SP25). Size 18 in. x 15 in. x 8 in. PRICE £32/6. Carr. 9/6.

STEREO AMPLIFIER

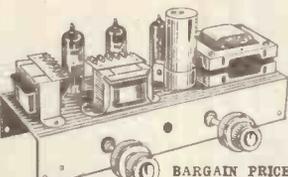


Incorporating 2 ECL86s and 1 E280; heavy duty, double wound mains transformer. Output 4 watts per channel into 3 ohm speakers. Full tone and volume controls. Absolutely complete. BARGAIN PRICE ONLY £24/19/6. P. & P. 8/-.

SUPER DE LUXE version incorporating ECL86 valves, sep. bass, treble and balance controls. Full negative feedback. 4 watts output into 3 ohm speakers. 8 Gus. P. & P. 8/-.

HIGH GAIN 4-TRANSISTOR PRINTED CIRCUIT AMPLIFIER KIT TYPE TAI

● Peak output in excess of 1 1/2 watts. ● All standard British components. ● Built on printed circuit panel, size 6 x 3 in. ● Generous size driver and output transformers. ● Output transformer tapped for 3 ohm and 15 ohm speakers. ● Transistors (GET 114 or 81 Mullard OC81D and matched pair of OC81 o/p). ● 9 volt operation. ● Everything supplied, wire, battery, clips, solder, etc. ● Comprehensive easy to follow instructions and circuit diagram 1/6 (Free with Kit). All parts sold separately. SPECIAL PRICE 45/- P. & P. 3/-. Also ready built and tested 52/6. P. & P. 3/-. A pair of TAIs are ideal for stereo.


ANOTHER HARVERSON SCOOP! FM/AM TUNER HEAD



Beautifully designed and precision engineered by Dorrner and Wadsworth, Ltd. Supplied ready fitted with twin .005 tuning condenser for AM connection. Prealigned FM section covers 86-102 Mc/s. I.F. output 10.7 Mc/s. Complete with EC083 (EL12) valve and full circuit diagram of tuner head. Another special bulk purchase enables us to offer these at 27/6 each. P. & P. 3/-. Order quickly! Limited number also available with precision geared 2:1 reduction drive, 36/- P. & P. 3/-.

MATCHED PAIR AM/FM I.F.s. Comprising 1st I.F. and 2nd I.F. discriminator (465 kc/s, 10.7 Mc/s.). Size 1 1/2 in. x 1 1/2 in. x 2 1/2 in. high. Will match above tuner head, 11/- pair. P. & P. 2/-.

10/14 WATT HI-FI AMPLIFIER KIT



A stylishly finished mono-stereo amplifier with an output of 14 watts from 2 EL84s in push-pull Super reproduction of both music and speech with negligible hum. Separate inputs for vocals and gram allow records and announcements to follow each other. Fully shrouded section wound output transformer to match 3-16Ω speaker and 2 independent volume controls, and separate bass and treble controls are provided giving good lift and cut. Valve line-up: 2 EL84s, EC083, EP86, and E280 rectifier. Simple instruction booklet 1/6 (Free with parts). All parts sold separately. ONLY £79/6. P. & P. 8/6. Also available ready built and tested complete with standard input sockets, £85/5/- P. & P. 8/6.

4-SPEED PLAYER UNIT BARGAINS

All brand new 'n' maker's original packing.
SINGLE PLAYER. Carr. 5/6 on each.
B.S.T. T1/12 £3 9 6
B.B.R. GU7 with unit mounted pick-up arm £4 18 8
Garrard SP25 de luxe £10 10 0
E.M.I. with unit mounted pick-up arm £4 9 6
AUTO. CHANGERS. Carr. 6/6 on each.
B.B.R. UA25 Super-slim £6 2 6 GARRARD 2000 £7 10 0
GARRARD AT70 £9 19 6 GARRARD 3000 £8 15 0
GARRARD 1600 with special Hi-Fi cartridge £8 19 6
All the above units are complete with 1/0 mono head with sapphire styl or can be supplied with stereo head at 12/6 extra.
B.B.R. MONARDECK (single speed) 3 1/2 in. per sec., simple control uses 5 1/2 in. spools. 28/15/- plus 7/6 carr. and ins. Tapes extra.
ACOS CRYSTAL MIKES. High imp. For deck or band use. High sensitivity. 18/6. P. & P. 1/6.
TSL CRYSTAL STICK MIKE. List 45/- Our price 18/6. P. & P. 1/6
QUALITY PORTABLE TAPE RECORDER CASE. Brand new. Beautifully made. Few only at 45/6. P. & P. 8/6.
WELL-KNOWN MAKER'S SURPLUS!
ONE TRANSISTOR FRE-AMP
Suitable for use with Medium or High Impedance mikes, guitars, gram, pick-ups, tape decks, etc.: for operation from 200/300 volt H.T. rail or 9-volt battery. Gain approx. 14:1. Fully isolated input by Mu-Metal screened transformer. Size 4 1/2 in. x 1 1/2 in. x 1 in. Ready built complete with full circuit diagram and instructions. ONLY 15/- Post free.

Open all day Saturday
Early closing Wed. 1 p.m.
A few minutes from South Wimbledon Tube Station.

HARVERSON SURPLUS CO. LTD.
170 HIGH ST., MERTON, LONDON, S.W.19
Cherrywood 3985
END STAMPED ADDRESSED ENVELOPE WITH ALL ENQUIRIES

(Please write clearly)
PLEASE NOTE: P. & P. CHARGES QUOTED APPLY TO U.K. ONLY. P. & P. ON OVERSEAS ORDERS CHARGED EXTRA.

OLRUS ELECTRONICS LTD. PAD 1515
9 Norfolk Place (off Praed St.) London, W.2

FACTORY NEW		FULLY GUARANTEED	
Valves	Valves—Transistors—Diodes—Zener		
DAF91 4/6	GZ34 10/-	68N7GTB	AF139 15/-
DAF96 6/8	PC86 11/-		AF186 19/6
DF91 3/-	PC88 11/-	6V6GT 6/6	AFY19 22/6
DF96 7/-	PC97 7/6	6X0GT 6/-	AFZ11 17/-
DK91 5/6	PC84 6/-	2SL6GT 6/6	AFZ12 12/6
DK92 5/6	PC89 11/-	30C15 10/-	ASV26 6/6
DK96 7/-	PC86 11/-	30F12 19/6	ASV28 6/6
DL92 5/6	PCF80 7/-	30FL14 11/-	ASZ20 7/6
DL94 5/6	PCF86 8/6	30L15 11/-	GET20 10/-
DL96 7/-	PCL82 7/-	30P12 9/-	GET102 6/-
DY96 6/4	PCL83 8/6	30P19 13/-	GET103 4/6
EB041 7/8	PCL84 7/6	30P12 19/6	GET106 8/6
EB051 6/3	PCL85 9/-	30P13 12/-	GET113 5/-
EB060 4/3	PCL86 8/6	38L6GT 6/-	GET114 4/-
EB089 6/9	PL36 9/-	38Z5GT 5/6	GET115 9/-
EC081 4/6	PL81 7/-	50L6GT 6/6	GET116 12/6
EC082 5/6	PL81 7/-	AC107 10/-	NKT213 6/-
EC083 5/6	PL82 6/6	AC126 6/6	NKT216 7/6
EC085 5/6	PL83 6/6	AC127 7/6	NKT251 5/-
EC086 5/6	PL84 6/6	AC127Z 9/6	NKT255 6/6
EC087 5/6	PL85 6/6	AC128 8/6	NKT304 8/-
EC088 5/6	PL86 6/6	AC176 7/6	NKT403 8/-
EC089 5/6	PL87 6/6	AC177 8/6	
EC090 5/6	PL88 6/6	ACX18 5/6	OA5 4/6
EC091 5/6	PL89 6/6	ACX19 6/6	OA7 4/-
EC092 5/6	PL90 6/6	ACX20 5/6	OA10 3/-
EC093 5/6	PL91 6/6	ACX21 6/6	OA47 3/-
EC094 5/6	PL92 6/6	AD140 6/6	OA90 2/6
EC095 5/6	PL93 6/6	AD149 16/-	OA73 2/6
EC096 5/6	PL94 6/6	AD161 11/-	OA79 2/6
EC097 5/6	PL95 6/6	AD162 11/-	OA81 2/6
EC098 5/6	PL96 6/6	AD163 11/-	OA85 3/-
EC099 5/6	PL97 6/6	AD164 11/-	OA86 4/-
EC100 5/6	PL98 6/6	AD165 11/-	OA87 4/-
EC101 5/6	PL99 6/6	AD166 11/-	OA88 4/-
EC102 5/6	PL100 6/6	AD167 11/-	OA89 4/-
EC103 5/6	PL101 6/6	AD168 11/-	OA90 4/-
EC104 5/6	PL102 6/6	AD169 11/-	OA91 2/6
EC105 5/6	PL103 6/6	AD170 11/-	OA92 2/6
EC106 5/6	PL104 6/6	AD171 11/-	OA93 2/6
EC107 5/6	PL105 6/6	AD172 11/-	OA94 2/6
EC108 5/6	PL106 6/6	AD173 11/-	OA95 2/6
EC109 5/6	PL107 6/6	AD174 11/-	OA96 2/6
EC110 5/6	PL108 6/6	AD175 11/-	OA97 2/6
EC111 5/6	PL109 6/6	AD176 11/-	OA98 2/6
EC112 5/6	PL110 6/6	AD177 11/-	OA99 2/6
EC113 5/6	PL111 6/6	AD178 11/-	OA100 2/6
EC114 5/6	PL112 6/6	AD179 11/-	OA101 2/6
EC115 5/6	PL113 6/6	AD180 11/-	OA102 2/6
EC116 5/6	PL114 6/6	AD181 11/-	OA103 2/6
EC117 5/6	PL115 6/6	AD182 11/-	OA104 2/6
EC118 5/6	PL116 6/6	AD183 11/-	OA105 2/6
EC119 5/6	PL117 6/6	AD184 11/-	OA106 2/6
EC120 5/6	PL118 6/6	AD185 11/-	OA107 2/6
EC121 5/6	PL119 6/6	AD186 11/-	OA108 2/6
EC122 5/6	PL120 6/6	AD187 11/-	OA109 2/6
EC123 5/6	PL121 6/6	AD188 11/-	OA110 2/6
EC124 5/6	PL122 6/6	AD189 11/-	OA111 2/6
EC125 5/6	PL123 6/6	AD190 11/-	OA112 2/6
EC126 5/6	PL124 6/6	AD191 11/-	OA113 2/6
EC127 5/6	PL125 6/6	AD192 11/-	OA114 2/6
EC128 5/6	PL126 6/6	AD193 11/-	OA115 2/6
EC129 5/6	PL127 6/6	AD194 11/-	OA116 2/6
EC130 5/6	PL128 6/6	AD195 11/-	OA117 2/6
EC131 5/6	PL129 6/6	AD196 11/-	OA118 2/6
EC132 5/6	PL130 6/6	AD197 11/-	OA119 2/6
EC133 5/6	PL131 6/6	AD198 11/-	OA120 2/6
EC134 5/6	PL132 6/6	AD199 11/-	OA121 2/6
EC135 5/6	PL133 6/6	AD200 11/-	OA122 2/6
EC136 5/6	PL134 6/6	AD201 11/-	OA123 2/6
EC137 5/6	PL135 6/6	AD202 11/-	OA124 2/6
EC138 5/6	PL136 6/6	AD203 11/-	OA125 2/6
EC139 5/6	PL137 6/6	AD204 11/-	OA126 2/6
EC140 5/6	PL138 6/6	AD205 11/-	OA127 2/6
EC141 5/6	PL139 6/6	AD206 11/-	OA128 2/6
EC142 5/6	PL140 6/6	AD207 11/-	OA129 2/6
EC143 5/6	PL141 6/6	AD208 11/-	OA130 2/6
EC144 5/6	PL142 6/6	AD209 11/-	OA131 2/6
EC145 5/6	PL143 6/6	AD210 11/-	OA132 2/6
EC146 5/6	PL144 6/6	AD211 11/-	OA133 2/6
EC147 5/6	PL145 6/6	AD212 11/-	OA134 2/6
EC148 5/6	PL146 6/6	AD213 11/-	OA135 2/6
EC149 5/6	PL147 6/6	AD214 11/-	OA136 2/6
EC150 5/6	PL148 6/6	AD215 11/-	OA137 2/6
EC151 5/6	PL149 6/6	AD216 11/-	OA138 2/6
EC152 5/6	PL150 6/6	AD217 11/-	OA139 2/6
EC153 5/6	PL151 6/6	AD218 11/-	OA140 2/6
EC154 5/6	PL152 6/6	AD219 11/-	OA141 2/6
EC155 5/6	PL153 6/6	AD220 11/-	OA142 2/6
EC156 5/6	PL154 6/6	AD221 11/-	OA143 2/6
EC157 5/6	PL155 6/6	AD222 11/-	OA144 2/6
EC158 5/6	PL156 6/6	AD223 11/-	OA145 2/6
EC159 5/6	PL157 6/6	AD224 11/-	OA146 2/6
EC160 5/6	PL158 6/6	AD225 11/-	OA147 2/6
EC161 5/6	PL159 6/6	AD226 11/-	OA148 2/6
EC162 5/6	PL160 6/6	AD227 11/-	OA149 2/6
EC163 5/6	PL161 6/6	AD228 11/-	OA150 2/6
EC164 5/6	PL162 6/6	AD229 11/-	OA151 2/6
EC165 5/6	PL163 6/6	AD230 11/-	OA152 2/6
EC166 5/6	PL164 6/6	AD231 11/-	OA153 2/6
EC167 5/6	PL165 6/6	AD232 11/-	OA154 2/6
EC168 5/6	PL166 6/6	AD233 11/-	OA155 2/6
EC169 5/6	PL167 6/6	AD234 11/-	OA156 2/6
EC170 5/6	PL168 6/6	AD235 11/-	OA157 2/6
EC171 5/6	PL169 6/6	AD236 11/-	OA158 2/6
EC172 5/6	PL170 6/6	AD237 11/-	OA159 2/6
EC173 5/6	PL171 6/6	AD238 11/-	OA160 2/6
EC174 5/6	PL172 6/6	AD239 11/-	OA161 2/6
EC175 5/6	PL173 6/6	AD240 11/-	OA162 2/6
EC176 5/6	PL174 6/6	AD241 11/-	OA163 2/6
EC177 5/6	PL175 6/6	AD242 11/-	OA164 2/6
EC178 5/6	PL176 6/6	AD243 11/-	OA165 2/6
EC179 5/6	PL177 6/6	AD244 11/-	OA166 2/6
EC180 5/6	PL178 6/6	AD245 11/-	OA167 2/6
EC181 5/6	PL179 6/6	AD246 11/-	OA168 2/6
EC182 5/6	PL180 6/6	AD247 11/-	OA169 2/6
EC183 5/6	PL181 6/6	AD248 11/-	OA170 2/6
EC184 5/6	PL182 6/6	AD249 11/-	OA171 2/6
EC185 5/6	PL183 6/6	AD250 11/-	OA172 2/6
EC186 5/6	PL184 6/6	AD251 11/-	OA173 2/6
EC187 5/6	PL185 6/6	AD252 11/-	OA174 2/6
EC188 5/6	PL186 6/6	AD253 11/-	OA175 2/6
EC189 5/6	PL187 6/6	AD254 11/-	OA176 2/6
EC190 5/6	PL188 6/6	AD255 11/-	OA177 2/6
EC191 5/6	PL189 6/6	AD256 11/-	OA178 2/6
EC192 5/6	PL190 6/6	AD257 11/-	OA179 2/6
EC193 5/6	PL191 6/6	AD258 11/-	OA180 2/6
EC194 5/6	PL192 6/6	AD259 11/-	OA181 2/6
EC195 5/6	PL193 6/6	AD260 11/-	OA182 2/6
EC196 5/6	PL194 6/6	AD261 11/-	OA183 2/6
EC197 5/6	PL195 6/6	AD262 11/-	OA184 2/6
EC198 5/6	PL196 6/6	AD263 11/-	OA185 2/6
EC199 5/6	PL197 6/6	AD264 11/-	OA186 2/6
EC200 5/6	PL198 6/6	AD265 11/-	OA187 2/6
EC201 5/6	PL199 6/6	AD266 11/-	OA188 2/6
EC202 5/6	PL200 6/6	AD267 11/-	OA189 2/6
EC203 5/6	PL201 6/6	AD268 11/-	OA190 2/6
EC204 5/6	PL202 6/6	AD269 11/-	OA191 2/6
EC205 5/6	PL203 6/6	AD270 11/-	OA192 2/6
EC206 5/6	PL204 6/6	AD271 11/-	OA193 2/6
EC207 5/6	PL205 6/6	AD272 11/-	OA194 2/6
EC208 5/6	PL206 6/6	AD273 11/-	OA195 2/6

DE-ICER, Controller Mk. 3. Contains 10 relays D.P. changeover heavy duty contacts, 1 relay 4P, C/O. (235 ohms coil). Stud switch 30-way relay operated, one five-way ditto, D.C. timing motor with Chronometric governor 20-30 volts 12 R.P.M.; geared to two 30-way stud switches and two Ledex solenoids, 1 delay relay, etc., scaled in steel case, size 4 x 5 x 7in. £3 each, post 7/6.

GEARED MOTORS (Reversible).
 28 v. 150 r.p.m., 25/-, post 2/6.
 24 v. Open gears with governor approx. 10 r.p.m., 25/-, post 2/6.
 A.C. Motor 115 v. 50 c/s. 1/300 H.P., 3000 r.p.m. Capacitor 1 mfd. 25/-, post 3/-.
 Dalmotor SC5, 28 v. D.C. at 45 amps.; 12,000 r.p.m. output 750 W. (approx. 1 h.p.), brand new, £2/10/- each, post 7/6.
 28 v. D.C., 200 r.p.m. (ideally suited for opening garage doors), current consumption approximately 6 amps. Price £3/10/-, postage 7/6.

CONDENSERS. 10 mfd. 1,000 v. 12/6, post 2/6. 8 mfd., 1,500 volts, 17/6, post 2/-. 8 mfd., 1,200 volts, 12/6, post 3/-. 8 mfd. 600 volts, 8/6, post 2/6. 0.25 mfd., 2 kv. 4/-, post 1/6.
 Vacuum condenser 50 pf. 32 kv. 30/-, post 1/6. 6 pf. 20 kv. 22/6, post 1/6.
 All the above are new in cartons.

HEADPHONES. DLR.5, 10/- pair, 2/6 post. No 10 headset and microphone, 15/-, post 2/6.

AUTOMATIC PILOT UNIT Mk. 2. This complex unit of diodes and valves, relays, magnetic clutches, motors and plug-in amplifiers, with many other items, price £7/10/-, £1 carriage.

U.S.A. DESK MICROPHONE CRV/5108/A. Complete with 7 yards of screened cable and universal jack (adjustable), 10/- each, post 3/-.

AR88 SPARES: Vibrator Unit, 6 v. D.C. New 25/-, post 6/-. Block Condenser 3 x 4 600 v. D.C. 25/-, post 4/-. 0.01 mfd. 400 v. D.C., 4 for 12/6. Capacitor Air Trimmer, 2-20 pF., box of 3 10/-, Ceramic I.O. Valve Holder, box of 5 7/6.

SIGNAL GENERATOR TS155c/UP (as new) price £75, carriage £1. TS125A, with leads etc., price £25, carriage 10/-.

APNI ALTIMETER TRANS/REC., suitable for conversion 420 mc/s complete with all valves 28 v. D.C. Dynamotor and 3 relays, 11 valves, price £3 each, carr. 10/-.

RADIO TELEPHONE GR300 V.H.F. 75 Mc/s. two channels, complete with control box and 12 v. D.C. supply, as new, £50, carr. £1. Control unit for the GR300, £3 each; also power supply unit 12 v. D.C., £3/10/- Carr. 10/-.

RELAYS SEMI ROTARY. 3 pole DT., contacts suitable for 10 amps. (silver), coil 12 volts D.C., new in cartons 12/6 each, post 2/6.

TRANS/RECEIVER UNIT Mk. 3. Freq. 2 to 8 mc/s., RT or CW., MCW., requires external power supply. Complete station £9, carriage 25/- Trans-rec. only £3/10/- carr. 15/-.

RESISTORS. Variable 3 ohm. 10 amps., 25/-, post 4/-.

ROTARY TRANSFORMERS. 24 v. input, 175 v. at 40 ma. output 25/-, plus 2/- post. EICOR type, 12 v. input, 400 v. at 180 ma. output, 30/-, plus 4/- post. 12 v. input, 225 v. at 100 mA. output, 25/-, plus 3/- post. (All the above are D.C. only).

CANADIAN C52 TRANS./REC., Freq. 1.75 to 16 mc/s. on three bands. R.T., M.C.W. and C.W. Crystal calibrator, etc., power input 12 volt D.C., new condition complete set £50, carr. £2/10/-. Used condition in working order £25, carr. £2/10/-. C52 receiver only (less outer case), £8/10/-, carr. 15/-. Transmitter only £7/10/-, carr. 15/-. Power unit C52 rec., new £3/5/-. Used power units in working order £2/5/-, carr. 10/-.

TRANSFORMERS. 230 to 115 v., isolation 300 va, £4 each, plus 5/-, 230/115 auto 300 watts, £3, post 10/-. 230 v. pri. 24 v. at 2 amp., 22/6, post 10/-.

RDO RECEIVER has complete metering of both RF and Audio Circuits. Calibrated Accuracy: 1% approx. Video Output: 25 mv into 50 ohms. It utilizes the same plug in RF tuning units as the AN/APR-4 Receiver and is ideally suited for monitoring and measuring signals in the 38-4,000 mc range. Receiver with three tuning units covering 38-1,000 mc/s. and Panoramic Adaptor. Price £150, carr. 30/-.

OSCILLOSCOPES. Type 1035, Cossor Mk. 1, in very good condition. £35, carr. £1. Hartley type 13a, £25, carr. £1. Type 1049 Mk. IV, excellent condition, price £50 each, carr. £1.

CT.53 SIGNAL GENERATOR. Freq. range 8.9-300 mc/s. with calibration chart. Output 1µV-100mV. internal square wave and sinewave modulation at 100 c/s, external modulation 50 c/s-10 Kc/s, 230 v. A.C. Complete with chart etc., price £27/10/-, carr. £1.

MARCONI CR100/2 RECEIVER. Freq. 60-30 mc/s., selectivity 100 db-30 db, complete with bandpass filter switch 100-300-1,200-3,000-6,000 c/s, 2 RF stages, crystal filter etc., 230 v. A.C. power supply. Price £30 each, carr. £1.

MICA CAPACITOR: .04 mfd., 1000 volts Peak Wkg., 25 amps. at 1,000 kc/s., price £3 each, post 5/-.

TRANSMITTER ASSEMBLY UNIT: Complete with 3E29 and 2 x 6AG7 valves and miscellaneous components. Price £2 each, carr. 6/-.

HRO RECEIVER. Model 5T. This is a famous American High Frequency superhet, suitable for CW., and MCW., reception crystal filter, with phasing control. AVC, and signal strength meter. Freq. range 50 kc/s. to 30 mc/s., with set of nine coils. Receiver only in working order, £18/10/-, carr. 15/- each. Set of nine coils £12/10/-, available only with set. Power unit for HRO., 100/240 v. A.C., £2/15/-, carr. 10/-.

CONVERTERS. Type 8a., 24 v. D.C., 115 v. A.C. at 1.8 amps 400 cycles, 3-phase, £6/10/- each, post 8/-.

ADAPTOR WAVEGUIDES TO COAXIAL UG 183/U (M Band). Price 30/- each, post 3/-.

S.A.E. for all enquiries. List available 6d. If wishing to call at Stores, please telephone for appointment.

W. MILLS

3-B TRULOCK ROAD, TOTTENHAM, N.17
 Phone: Tottenham 9213

DALMOTORS: (All ex equipment):
Actuator Type SR-43: 28 v. D.C. 2,000 r.p.m., output 26 watts, 5 inch screw thrust, reversible, torque approx. 25 lbs., rating intermittent, price £3 each, postage 5/-.
Model PM-4: 28 v. D.C. @ 3 amps, 4,500 r.p.m., output 40 watts, continuous duty complete with magnetic brake. Price £2 each, postage 4/-.
Model SR-2: 28 v. D.C. 7,000 r.p.m., duty intermittent, output 75 watts, price 25/- each, postage 4/-.
MOTORISED ACTUATOR: 115 v. A.C. 400 c/s. single phase, reversible, thrust approx. 3 inches complete with limit switches, etc. Price £2/10/- each, postage 5/- (ex equipment).
D.C. MOTOR: 27 v. D.C. with gear box, 4 r.p.m. Price 25/-, postage 3/- (ex equipment).
GEARED MOTOR: 28 v. D.C. approx. 200 r.p.m. complete with precision potentiometer, 40k plus or minus 3%, 2.5 watts linear plus or minus 0.25%. Price 30/-, postage 4/- (ex equipment).

TRANS/REC 510/A. This is a lightweight transmitter/receiver principally used for long range communications. Frequency tunable 2-10 Mc/s. and has facilities for "VOICE" or "CW" working. The operator can set up 4 crystal controlled channels within this band and select the required frequency by means of a switch on the panel of the transmitter. Power requirements 1½ v. and 90-7½ v. The power output is approx. 0.2 watts for "VOICE" (unmodulated) and 0.5 watts for "C.W." Suitable for mobile units or can be used as a base station with improved aerial system in excellent condition. £15 each, carr. 10/-.

MARCONI TYPE TF-144G SIGNAL GENERATOR. Freq. 85 Kc/s.-25 Mc/s., internal and external modulation, power supplies 200/250 v. A.C. Price £25, carr. 30/-.

TS535A/U, Hewlett Packard Co. Signal Generator: freq. on 4 bands 7-16 kc/s., 15-36, 34-80, 70-160 kc/s., with 400 cys. external mod., microvolts 0-10 and 0-20 Db., with a 2 inch cathode ray tube for visual indication. Power Supplies 115 v. A.C. Price £75 each, carriage £1.

MARCONI SIGNAL GENERATOR NO. 13. 2 bands, 20-40 mc/s and 40-80 mc/s. FM., AM., and CW. Mod. freq. 300/1000/1600/3000 and external mod. Output voltage is 0.1-10. Power Supplies 110 v. or 250 v. A.C. Price £50, carriage £1.

MULTIPLIERS (CT54 valve voltmeter), £2/10/- each, post 3/-.

HS RELAYS. 1,700/1,700 ohm coil, 17/6 each. 500/500 ohm coil, 15/- each. Postage 2/-.

TACAN Trans/Receiver, same as ARN21, British made, STC, TR9171 complete with five 2C39As with associated valve-holders. As new price £25. Used condition £15, carriage £1.

CONTROL MOTORS. 115/115 v., 2 pole 60 cys., output 5 watts, the tachometer 115 v. 1 ph., output volts per 1,000 v. = 6 v., £3/10/-, carr. 4/- each. Type R110-2B-B. 115/115 v. 400 cys., £2/10/-, carr. 4/- each.

TELEPHOTO UNITS (Trans-ciever) Type CNP. Complete with tuning fork and power supplies 115 v. 50 or 60 cys., £30 carr. £2 each.

TELETYPEWRITERS. TT-4 TGXc-2. Also AN/PGC-1 and AN/PGG-2, £35, carr. £1 each.

UNISELECTORS (ex equipment):
 8 bank 25 way, 75 ohm coil, price 35/- each, postage 4/-.
 3 bank 25 way, with one homing bank, price 25/- each, postage 3/-.

RELAY PANEL: with 4 Leach relays, 28 v., 135 ohm coil, 4.P. C/O, 10 amp. contacts, 4 relays, 28 v., 235 ohm coil, 3 pole C/O plus high speed relay, 16,000 ohms, 1 C/O. Price 30/- each, postage 5/-.

TELEPHONES (PORTABLE) TYPE "F." Suitable for all outdoor activities up to a range of 5 miles, in excellent condition. Price, complete with batteries, £5/10/- per pair, carriage 10/-.

B.44 MODULATION TRANSFORMER: Ratio 2:1 or as an output transformer 85:1. Price 25/- each (new in cartons), postage 3/6.

BATTERY CHARGERS: 100-250 v. A.C. Input, 12 v. 15 Amp. Output (2-Rate Charger complete with Sun-vick thermal switch for fast or trickle charge), price £12/10/- each, carr. 30/-.

COMMAND RECEIVERS: Model 3-6 mc/s and 6-9 mc/s, as new, price £5/10/- each, post 5/-.

BC-433-G COMPASS RECEIVER: Freq. 200-1,750 kc/s. in 3 bands, suitable for aircraft, boats, etc. Complete with 15 valves, power supply input 24 v. D.C. at 2 amps. Receiver only £5 each, control box for receiver £1 each. Sold only with Receiver. Carr. 15/-.

TCS MODULATION TRANSFORMERS, 20 watts, pri. 6,000 C.T., sec. 6,000 ohms. Price 25/- each, post 5/-.

URM-67 PHASE MONITORS. Price £85 each, carriage £1.

TS382 AUDIO OSCILLATORS. Price £45 each, carriage £1.

TACAN PERFORMANCE TESTER, Type 7288, 105/17012. Price £45 each, carriage £1.

SPECTRUM ANALYSERS, TSE/4SE. Price £75 each, carriage £2.

WAVE GUIDES FLEXIBLE CG-182/APM.40. Length 18 inches. Price £2 each, post 4/-.

ADVANCE TEST EQUIPMENT		
H1B Audio Signal Generator	£30	0 0
J1B Audio Signal Generator	£30	0 0
J2B Audio Signal Generator	£35	0 0
TT1S Transistor Tester	£37	10 0
VM76 AC/DC Valve Voltmeter	£72	0 0
VM77C AC Millivoltmeter	£40	0 0
VM78 AC Millivoltmeter (transistorised)	£55	0 0
VM79 UHF Millivoltmeter (transistorised)	£125	0 0

These are current production, manufactured in U.K. by Advance Electronics Ltd. (not discontinued models). Showing a saving of approximately 33% on nett trade price. BRAND NEW, all in original sealed carton. Carr. 10/- extra per item.
 Special offer of 10% discount for schools and Technical Colleges, etc.

HR LTD
HENRY'S RADIO LTD.
 363 EDGWARE RD., LONDON, W.2.
 PADdington 1008/9 (STD: 01-723-1008)
 Open Mon. to Sat. 9-6. Thurs. 1 p.m.



COMPONENTS A SPECIALITY.
 Let us quote for your requirements. Latest catalogue contains full details of our stocks.

1967 CATALOGUE 200 PAGES PLUS!

COMPLETELY NEW EDITION—HUNDREDS OF NEW LINES

● Contains the largest and most comprehensive range of Components and equipment available. Over 5,000 Stock Lines with more data and illustrations. Hundreds of Bargain Lines. You cannot afford to be without a copy of this catalogue. Supersedes all previous editions.
 ● **UNBEATABLE VALUE — 200 PACKED PAGES — 10/- VALUE VOUCHERS ●**

● **5 FREE VOUCHERS**

Total value 10/- for use on goods purchases. Pays for catalogue after use. Price 7/6, p.p. 1/-.



(1) **5-WATT AMPLIFIER**
 6-Transistor Push-pull, 3 ohms, 6mV. into 1K. 12/18 v. supply. 2½×2×1½in.
BUILT AND TESTED 69/6 P.P. 2/-
 (optional mains units 54/-)
 1½ watt version 59/6.
 Matching Pre-amplifier, 6 inputs, treble/bass/selector/volume controls. 6-10 mV. output. 9-18 v. supply. 79/6. P.P. 2/-.
 For use with any Transistor Amplifier

(2) **VHF TUNER TO BUILD**
 87/405 Mc/s. "5 transistor Superhet." Gearing tuning. Terrific quality and sensitivity. For valve or transistor amplifiers. 4×3½×2½in. Complete with dial plate (FM Decoder Kit £5/19/6, P.P. 2/-).
TOTAL COST TO BUILD £6.19.6 P.P. 2/6
 (Cabinet Assembly 20/- extra)

(3) **GARRARD DECKS—BRAND NEW WITH HIGH QUALITY CARTRIDGES**

1000 mono	£5 19 6	SP25 stereo ..	£10 19 6	401 less cart/arm	£27 10 0
AT5 mono	£6 9 6	SP25 Deram ..	£13 19 6	AT6 mono Mk. 2	£8 19 6
2000 mono	£6 9 6	AT60 less cart.	£10 19 6	AT6 stereo Mk. 2	£9 10 0
2000 stereo	£6 19 6	AT60 mono ..	£11 10 0	AT6 Deram Mk. 2	£11 19 6
3000LM stereo	£7 10 0	AT60 stereo ..	£11 19 6	Decadec Mk. II	£17 17 0
SP25 less cart. ..	£9 19 6	AT60 Deram ..	£14 19 6	AT70 less cart. ..	£17 17 0
SP25 mono	£10 10 0	LAB80 less cart.	£25 0 0	(P. & P. any type)	

All other makes of decks and cartridges in stock.

(4) **REGENT-6 MW/LW POCKET RADIO TO BUILD**
 6-Transistor superhet. Gearing tuning. Push-pull speaker output. Moulded cabinet 5×3×1½in. Phone socket.
TOTAL COST TO BUILD 69/6 P.P. 2/-
 Full tuning on both bands.

(5) **MW/LW QUALITY TRANSISTOR RADIO TUNER**
 Fully tuneable superhet with excellent sensitivity and selectivity. Output up to ½ volt peak. Complete with front panel, etc., 9 volt operated. For use with any amplifier or tape recorder. 3 Mullard transistors.
TOTAL COST TO BUILD £3.19.6 P.P. 2/6

(6) **25 WATT AMPLIFIER**
 8-Transistor design. Push-pull output for 7½ to 16 ohm speaker. 160mV input. 30c/s to 20kc/s + 1 dB. For use with valve or transistor preamplifiers as item (11) below.
PRICE BUILT AND TESTED £7.19.6 P.P. 3/-
 (Mains unit 79/6, P.P. 2/6).

(7) **VHF FM TUNER**
 Supplied as 2 pre-assembled Panels, plus metal work. Superhet design, 88-103 Mc/s. 9 volt operated. 6 Mullard transistors.
 Total cost £12/17/6. P.P. 2/6.

(8) **GLOBEMASTER MW/LW/SW PORTABLE RADIO TO BUILD 6 MULLARD TRANSISTORS**
 Full 3-waveband tuning. Push-button wave-change. Superhet printed circuit design. Black-chromed cabinet 11×7½×3½in. (SW 17-50 metres). Ear/Record sockets. 1 watt push/pull output. 6 Mullard transistors.
TOTAL COST TO BUILD £7.19.6 P.P. 3/6

12 & 20 WATT MONO & STEREO TRANSISTOR AMPLIFIERS

(10) **POWER AMPLIFIERS.** 10 watts RMS output. 100mV input. 30 c/s to 20 kc/s ± 1dB. 6-Transistor Push-pull. Panel size 4×2½×1in. H/S 4×4in. Peak output 20 watts.
 MPA10/3 3.5 ohm speaker, £4/10/-. P.P. 2/6
 MPA10/15 8-16 ohm speaker £5/5/-. P.P. 2/6
 (Mains unit, 1 or 2 amplifiers, 59/6. P.P. 2/6)

(11) **PREAMPLIFIERS.** 8 input selector. Treble, bass, volume, filter controls. 1½mV to 300mV inputs. Battery operated or from Mains Unit. Output up to 150mV RMS.
 MP2 Mono 9½×2½×2in., £5/10/-. P.P. 2/6. (grey and gold front panel, 8/6).
 SP4 Mono/Stereo, 9×3½×1½in., £10/19/6. P.P. 3/6 (front panel plate 12/6).
 ★ ALL UNITS BUILT AND TESTED
 Detailed booklet free on request.

★ MAYFAIR PORTABLE ELECTRONIC ORGAN

Build the World's first All-Transistor Portable Electronic Organ Kit

- Plug-in printed circuits ● 170 transistors and devices ● 10 selected tone colours ● Fully sprung keyboard ● Vibrato ● 6 Octaves of generators ● Simple locked-in tuning ● 110/250 volt mains unit ● Cabinet size 30½×15½×9in. ● Weight 35 lb. Cabinet with detachable legs, music stand and foot swell pedal. ● Fully detailed building manual with photos, drawings and full circuits.

TO BUILD YOURSELF IN EASY STAGES. ALL PARTS SOLD SEPARATELY.

- ★ Start building for as little as £5. Build the Mayfair a section at a time.
- ★ H.P. facilities available.
- ★ Complete range of organ components in stock.
- ★ Complete kit 99 gns. (carriage 30/-).
- ★ Handbook Separately 20/-

● **DETAILED LEAFLET ON REQUEST** ●

ACCLAIMED BY EVERYONE



CALL FOR DEMONSTRATION

Designed by L. W. Roche

● **FULL AFTER SALES SERVICE**


● **BRITISH MADE AND DESIGNED**

● **THE ONLY ONE OF ITS KIND**

● **UNBEATABLE FOR PRICE, PERFORMANCE, QUALITY AND VALUE**


● **SAVE POUNDS**

● **SUPPLIERS OF QUALITY COMPONENTS AND EQUIPMENT FOR MORE THAN 20 YEARS** ●

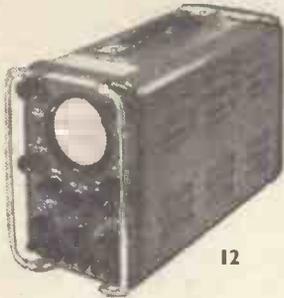

12

(12) MINIATURE OSCILLOSCOPE MODEL CT52
 High sensitivity scope, fully portable with Mullard DG7/5 2 1/2 in. tube. 10 c/s. to 40 kc/s. FREE running Time Base. Single Sweep Pulse Monitoring 50m/sec. to 0.1 μ sec. Y-Plate sensitivity 40 v. per cm. 3 dB. 25 c/s. to 2 Mc/s. and up to 35 dB. Gain on Amplifier. Full input facilities and controls. 110 to 250 volt A.C. mains operated. Complete in portable case with leads. In new condition.
£22.10.0 Carr. & Pkg. 10/-
FULL HANDBOOK AND CIRCUIT.



13

(13) BUILD A QUALITY 2 OR 4 TRACK TAPE RECORDER
3 SPEED VERSION. Using '363' Decks.
 ★ **TWO-TRACK.** Deck £10/10/-. Martin Amplifier £14/19/6. Cabinet and Speaker 7 gns. Complete kits with FREE 7in. 1,200ft. tape, spare spool. **27 gns.** P.P. Today's value 35 gns. **15/-**
 ★ **FOUR-TRACK.** Deck £13/10/-. Martin Amplifier £15/19/6. Cabinet and speaker 7 gns. Complete kits with FREE 7in. 1,200ft. tape, spare spool. **30 gns.** P.P. Today's value 40 gns. **15/-**



14



15

(14) NOMBREX TEST UNITS
 ★ 150 kc/s—350 mc/s RF Generator £10/10/-. All Transistor.
 ★ 10 c/s—100 kc/s Transistor £16/19/6. Audio Generator. All Transistor.

(15) MULTI-METERS
 PT34 1kV 39/6 EP30k 30kV £6/10/-
 TP10 2kV 75/- EP50k 50kV £9/19/6.
 ITI-2 20kV 69/6 500 30kV £8/17/6.
 TP25 20kV £5/19/6 EP100k 100kV £10/10/-
 Complete range of test equipment in stock.

SEMICONDUCTOR DEVICES—ALL TYPES

TUNNEL DIODES
 1mA. 22/8. 5mA. 15/-
 15mA. 12/6 with specs.
THYRISTORS (SCRs)
 1 AMP MINIATURES
 50 pIV 7/6. 100 pIV 7/6.
 200 pIV 12/6. 300 pIV 15/-
 400 pIV (280 v. rms.) 17/6.
3 AMP STUD TYPES
 50 pIV 10/-. 100pIV. 12/6.
 200 pIV 15/-. 300 pIV 17/6.
 400 pIV (280 v. rms) 20/-
AVALANCHE RECTIFIERS
 800 pIV 10 amp. 17/6
 800 pIV 5 amp. 12/6
 1000 pIV 1 amp. 8/6
POWER RECTIFIERS
 (5 amp)
 200 pIV 7/6. 400 pIV 9/6.
 600 pIV 12/-. 800 pIV 6 amp. 15/-
1.25 AMP. WIRELEADS
 100 pIV 5/-. 200 pIV 5/6.
 400 pIV 6/-. 600 pIV 6/6.
TRANSISTORS
 Every type you need from stock. The largest range available.
24 PAGE CATALOGUE
 With nearly 600 types, plus all other devices, also quartz crystals and valves 1/-.

(17) MARRIOT TAPE HEADS
 1/2 Track R/RP/3 Med z, 7/6, R/RP/1 High z, 9/-, R/RP/1 High z + R/E/1 erase on block, 19/6.
 1/2 Track L/RPS/12 High z, 15/-. L/RPS/7 Med z, 19/6. L/ES/9 erase, 12/6. Also HR-RP single track Rec/Play Med z 6/6.

(18) RELAYS AND MOTORS
 Large range in stock. See catalogue. Also micro switches, push switches, transistors, scr's, rectifiers, zeners, etc. Multimeters, panel meters. Precision and standard components of all types now in stock. The country's largest selection.

We can supply from stock most of the parts specified on circuits in this magazine. Ask for quotation or better still the new 1967 catalogue has everything you need—PLUS free discount vouchers.

(19) STABILISED POWER SUPPLY
 Two outputs. 3.6 volt and 9.6 volt up to 250mA. each. Transistorised and Zener stabilised. 110 to 250 volt mains input in case with leads. **PRICE 67/6**, p.p. 2/6.

(20) DEAC RECHARGEABLE BATTERY
 9.6 volt 225mA/H 20/-. P.P. 1/6.

(21) DEAC CHARGER
 To charge 3.6 volt and 9.6 volt packs. Fully mains isolated in moulded case. **45/-** P.P. 2/-.

(22) FM STEREO DECODER KIT
 As used by B.B.C. and G.P.O.
 7-Transistor printed circuit design with stereo indicator and pre-amp. For use with any valve or transistor FM tuner. Uses Ger. and silicon transistors and pot cores to Mullard **PRICE £5.19.6** P.P. design. **2/-**

STEREO BROADCASTS THE REAL SOUND

HENRY'S RADIO LTD.

303 EDGWARE RD., LONDON, W.2.
 PADddington 1008/9 (STD 01-723-1008)
 Open Mon. to Sat. 9-6. Thurs. 1 p.m.
 Open all day Saturday

HI-FI EQUIPMENT

Complete range in stock at special prices. Full details in new 1967 catalogue (8/6 post paid). Visit our H-Fi show room.



16

(16) GARRARD BATTERY 2-SPEED 9 VOLT TAPE DECK
 Brand New with R/P head, erase/osc. head, tape cassette with tape and instructions. 2 speed 2-track. 9 volt operated. List price 13 gns. Fitted governor. **£8.19.6** P.&P. **OUR PRICE** 3/6



MULTI-TAPPED TRANSFORMERS MOST TYPES, FULLY SHROUDED AND TERMINAL BLOCK CONNECTIONS. ALL PRIMARIES 220-240 VOLTS

*Denotes Unshrouded Types.

TYPE	SEC. TAPS	AMPS.	PRICE	CARR.
1A	25-33-40-50	15	£7 19 6	9/-
1B	25-33-40-50	10	£7 19 6	7/6
1C	25-33-40-50	6	£4 19 6	7/6
1D	25-33-40-50	3	£2 19 6	6/-
2A	4-16-24-32	12	£5 7 6	7/6
2B	4-16-24-32	8	£4 2 6	7/6
2C	4-16-24-32	4	£2 12 6	6/-
2D	4-16-24-32	2	£1 15 0	5/-
3A*	25-30-35	40	£12 15 0	15/-
3B*	25-30-35	20	£7 19 6	9/6
3C	25-30-35	10	£5 10 0	7/6
3D	25-30-35	5	£3 5 0	6/-
3E	25-30-35	2	£2 7 6	4/6
4A*	12-20-24	30	£9 15 0	10/-
4B	12-20-24	20	£5 19 6	8/6
4C	12-20-24	10	£3 19 6	7/6
4D	12-20-24	5	£2 15 0	6/-
5A	3-12-18	30	£7 5 0	7/6
5B	3-12-18	20	£5 9 6	7/6
5C	3-12-18	10	£3 5 0	6/-
5D	3-12-18	5	£2 5 0	5/-
6A	48-56-60	2	£2 17 6	4/6
6B	48-56-60	1	£1 19 6	4/6
7A*	6-12	50	£7 15 0	9/6
7B	6-12	20	£4 10 0	7/6
7C	6-12	10	£2 19 6	6/6
7D	6-12	5	£2 2 6	5/-
9A	15-30	1 1/2	19 6	4/6
10A	1-15	2	19 6	4/6
11A	6-3	15	£1 17 6	5/6

Note: By using the Intermediate Taps many other voltages can be obtained. Example:
 Range One 7-8-10-15-17-25-33-40-50v.
 Range Two 4-8-12-16-20-24-32v.
 Range Five 3-6-9-12-15-18v.

Samson's Electronics Ltd.

9 & 10 CHAPEL STREET, LONDON, N.W.1
 Tel. PAD 7851 AMB 5125

ISOLATION TRANSFORMERS
 Fully shrouded. Terminal block connections. Pri. tapped 220-240 v. Sec. tapped 220-240 v. 1 amp. 75/-, Carr. 5/-. 2 amps. £6/15/-. Carr. 6/6. 3 amps. £7/19/6, Carr. 7/6. 4 amps. £8/10/-. Carr. 7/6.

LOW RESISTANCE SMOOTHING CHOKES
 Shrouded type 0.05 H. 0.75Ω 2 amps. 39/6, P.P. 4/-
 0.03 H. 0.4Ω, 4 amps., 49/6, P.P. 4/6. 0.02 H. 0.25Ω, 8 amps. 55/-, P.P. 6/-.

AUTO TRANSFORMERS
 For 110 v. equipment. Input 240 v., output 110 v., 3,000 watts. Completely enclosed in strong metal case. Terminal block output. £15, Carr. 15/-.
 Also available: Completely shrouded, fitted with 2-pin American sockets, or terminal blocks. Please state which type required:—

Type	Watts	Weight	Price	Carriage
1	80	2 1/2 lbs.	£1 12 6	4/6
2	150	4 lbs.	£2 2 6	5/-
3	300	6 1/2 lbs.	£2 15 0	6/-
4	500	8 1/2 lbs.	£3 17 6	6/6
5	1000	15 lbs.	£5 5 6	7/6
6	1500	20 lbs.	£7 15 0	8/6
7	2000	28 lbs.	£10 19 6	12/6


Note: Type 7 completely enclosed in beautifully finished case fitted with two 2-pin American Sockets, Neon Indicator, On/Off Switch and Carrying Handle.
 Double Wound Transformers 240-110 volts. Up to 1500 watts. Made to Order. Let us Quote You.

Send 6d. Stamp for our Latest Price List, giving full details of our range of Low Tension Transformers, Chokes, Capacitors, Rectifiers, L.T. Supply Units, Instruments, Variable Transformers.

SMITHS GEARED MOTORS
 One RP 24 hours A.C. 200-250 volts 2 watts. Overall size 2 x 2 in. Length of spindle 3/4 in. 25/- P.P. 2/-
 As above, but for 24 v. A.C. operation, 19/6. P.P. 2/-.

S.T.C. SELENIUM RECTIFIERS
 Type B84-9-1 w. F.W. bridge. Max. A.C. input 162 volts. D.C. output 140 volts 2 1/2 amps., 57/6. P.P. 5/-. Type B67-9-1 w. 1 1/2 amps. output, 37/6. P.P. 5/-. Type B84-4-3 w. Two required for F.W. Bridge. Max. A.C. input 72 volts. D.C. output 60 volts 8 amps., 50/- per pair. P.P. 5/-.

RELAYS
 Special Offer of Brand New 3000 Type Relays. All one price: 7/6 each. P.P. 1/6. 75Ω, 1CO, 3M, 1B, 150Ω, 2 Heavy Makes. 500Ω 6 CO, 2000Ω 2 CO, 2 Heavy Makes.
 Siemens Miniature Sealed Relays. Size 1 1/2 x 1 x 3/4 in. 700Ω, 4 CO. With Base. Brand New 8/6, P.P. 1/6.

L.T. SUPPLY UNIT TYPE S.E.1

 A.C. input 200-240 volts
 D.C. Output tapped to give 12 or 24 volts 8 amps. continuous rating. Fitted with panel fuse, mains on/off switch and D.C. output socket. Built in strong metal case. Size 15 x 6 x 6 in. An ideal general purpose L.T. supply unit for operating relays. Contactors, battery charging, etc. £9/19/6, Carr. 7/6.

L.T. SUPPLY UNIT TYPE S.E.2
 A.C. input 200-240 v., D.C. output 50 volts 5 amps. Built in metal case, size 15 x 6 x 6 in. Fitted with on/off switch, panel fuse and output socket. £9/19/6, Carr. 7/6.

P.V.C. EQUIPMENT WIRE
 14/0076 100-yard Coils. 5 coils Different colours 32/6, Carr. 5/-.

NEW BARGAINS

MOVING COIL METER 2 1/2 in. flush mounting 5-0-5mA centre zero. 25/- each. 20/- per dozen.

MOVING COIL METER. 2 1/2 in. flush mounting 250-0-250 micro amps centre zero. 29/6 each.

50 OHM 50 WATT WIRE WOUND POT-METER. 8/6 each.

20K WIRE WOUND POT-METER. 20 watt type made by Colven complete with control knob. 10/- each.

1 MEG MINIATURE. Pot-meter Morganite standard, 1/2 in. spindle 1/- each, 9/- per dozen.

1 MEG MINIATURE. Pot-meter Morganite pre-set screw-driver control. 9d. each. 8/- per dozen.

PRE-SET 100K by Wetwyn with intricate bakelite knob. 1/- each. 9/- per dozen.

10CK POT-METER. Miniature type with double pole switch and standard 1/2 in. spindle, by Morganite. 2/- each. 18/- per dozen.

25K POT-METER. Standard size with double pole switch by Egn with full length 1/2 in. spindle. 3/- each. 36/- per dozen.

BLANKETSTAT GLASS. Enclosed, normally closed circuit, will open should blanket overheated. 4/6 each.

THERMAL RELAY. Can be used to delay the supply of HT valve heaters warm up, or will enable 15 amp. loads to be controlled by miniature switches or relays. Regular list price over £2. Price 7/6 each.

SIEMENS HIGH SPEED RELAY. Twin 1000 ohm coils. Platinum points changeover contacts—Ex equipment. 8/6 each.

ELECTROLYTIC CONDENSER. 500MF, 50 v. working. 5/- each. 45/- per dozen.

WATERPROOF HEATING ELEMENT. 90 yds. length. 70 w. Self-regulating temperature control. 10/- post free.

FOOTSWITCH. Two snap-action switches in metal box with flex lead. Ideal to control tape-recorder, dark room lamp, etc.. 13/6 plus 2/9 postage and insurance.

TOGGLE SWITCH BARGAIN. 10 amp. 250 v. normal one hole fitting. 2 9 each, or 30/- per dozen.

ELECTRIC LOCK. 24 v. coil, but rewirable to other voltages, 4/6 each.

COMPRESSION TRIMMERS. Twin 100 pF. 1/- each. 9/- per dozen.

MINIATURE RELAY. American make. 630 ohm coil. 20/30 volt operation. 2 pole changeover. 3/- each. 30 per dozen.

PRECISION WHEATSTONE BRIDGE. Opportunity to build cheaply. 100K wire wound pot. 15 w. rating, only 5/-.

SHEET PAXOLIN. Ideal for transistor projects. 12 pieces each 5 1/2 in. x 5 1/2 in.

3in. FM LOUDSPEAKERS. 3 ohm, 12/6. 80 ohm, 13/6.

TRANSISTOR FERRITE SLAB AERIAL with medium and long wave coils. 7/6 each.

SLIDE SWITCH. 8 pin miniature double pole changeover. 2/- each. 18/- per dozen.

MAAGLIPS (Selsyns). American made transmitter and receiver. 27/6 each, post 4/6 for any one of the pair.

SEMI-CONDUCTOR BARGAINS

Type No.	Price	Type No.	Price	Type No.	Price
2N1271	15/-	MAT101	8/6	OC71	3/6
2N1298	10/-	MAT120	7/9	OC72	5/-
2N1749	25/-	MAT121	8/6	OC75	6/-
2N1747	25/-	OA5	5/-	OC78	5/-
2N1748	10/-	OA10	6/-	OC77	7/-
AC107	9/-	OA47	3/-	OC78	5/-
AC127	9/-	OA70	2/-	OC78D	5/-
ACV17	8/6	OA79	2/6	OC81	5/-
ACV18	5/6	OAB1	2/6	OC81D	5/-
ACV19	5/6	OAS5	2/6	OC82	5/-
ACV20	5/6	OAA0	2/6	OC83	5/-
ACV21	6/-	OA01	2/6	OC84	6/-
ACV23	4/6	OA200	3/3	OC139	8/6
AF14	7/-	OC202	4/3	OC140	12/6
AF115	6/6	OC22	10/-	OC170	5/-
AF116	7/-	OC23	17/6	OC171	6/-
AF117	5/-	OC24	15/-	OC200	9/-
AF118	10/-	OC26	7/6	OC201	12/6
AF139	12/6	OC29	15/-	OC202	13/6
AF198	17/6	OC30	17/6	OC203	12/6
AF212	15/-	OC35	12/6	OC271	15/-
AB221	15/-	OC36	15/-	ORP12	8/6
BC107	14/6	OC42	6/6	ORP60	5/-
BY100	4/6	OC44	4/-	8B078	8/6
BY213	7/6	OC45	3/6	8B305	8/6
MAT100	7/9	OC70	4/-	8B251	10/-

S.C.Rs (THYRISTORS)
 100 v. 1 amp. 8/6. 3 amp. 7/6. 12 amp. 15/-, 400 v. 1 amp. 15/-, 3 amp. 17/6. 5 amp. 22/6. 25 amp. £3. 50 v. 1 amp. 6/6. 3 amp. 7/6. 10 amp. 10/-, 25 amp. 30/-.

SILICON RECTIFIERS Tested and guaranteed
 750MA100v. 1/3 3A 100v. 3/6 10amp 100v 9/6
 200v. 1/6 200v. 5/- 200v. 12/6
 400v. 3/6 400v. 7/6 400v. 14/6
 1 amp 100v. 3/- 600v. 9/6
 200v. 4/-
 400v. 6/-

Sub miniature glass encased—only approx. 1/2 in. long were ended 750mA—50 v., 1/6. 100v., 2/6. 200 v. 4/6. 400 v., 6/6.

MINIATURE WAFER SWITCHES

4 pole, 2 way—3 pole, 3 way—4 pole, 4 way—2 pole, 4 way—3 pole, 4 way—2 pole, 6 way—1 pole, 12 way. All at 3/6 each, 30/- dozen, your assortment.

NEON MAINS TESTER

Cool length leads 2/6.

FLUORESCENT LIGHT SLOTS

Comprising choke, lampholders, starter and two chrome tube clips. 20 watt 19/6. 40 watt 11/6. Super Silent 40 watt 17/6. 80 watt 17/6. 65 watt 19/6. All 4/6 P. & P.

HEAT AND LIGHT UNIT

Bring luxury to your bathroom—have comforting heat where you now only have light—all the parts to build a full size (16in. diameter) model are now available—you will build it in an hour—12in. 730 watt circular silica glass encased element—opal bowl for up to 100 watt lamp—non-rust spun reflector—white enamelled base heat shield—pull switch, magnificent unit as sold normally at £4/5/-. Only 49/6, plus 5/- post and insurance.



NIM COMPUTER

This computer will play games and do simple tricks and will provide endless amusement as well as education into computerisation. Kit comprises all the components, the printed front panel and full instructions. The box is not included but this can be made very simply from plywood. Price £4/17/6, plus 3/6 post and ins.



SUPERTONE G.C.V.

Saves you work—It's partly built


Like its predecessors this latest Companion has full f performance—such as only a good wooden cabinet and biflux speaker can give, and due to its being partly built you will have it going in an evening. Note these features:

- All Mullard Transistors including 3 x AF117.
- Two-tone Cabinet, size 11 x 8 x 3 1/2 in.
- All circuit requirements—Push-pull output—A.V.C. and feed back, etc.
- Printed circuit board all wired only connections, e.g. to Volume control—W.C. Switch and Tuning Condenser.
- Pre-aligned IF stages complete with full instructions. Price only £3/19/6, plus 6/6 post and insurance.



THIS MONTH'S SNIP

The Vectronome Capstan Driven Tape Recorder.
 This is a truly portable self-contained instrument with built-in microphone and loud speaker using a 7 transistor amplifier with P.P. output and suitable for operation from mains or by rechargeable batteries. Tape capacity is 23 minutes on easily changed spools. A tape position indicator gives quick reference to any part of dictation. Recording level is automatically pre-set during dictation and can be adjusted to suit operator. Interlock prevents unintentional erasures. Tape speed controlled by fly wheel driven capstan. Very portable in neat case with carrying handle, overall size of which is approximately 6 1/2 in. x 7 1/2 in. x 2 1/2 in. Price with tape and mains unit but less batteries £29/19/6 (rather less than 1/3 original price) postage and insurance 7/6. Untraced and in perfect working order.



F.M. TUNER

of exceptional quality, giving really fantastic results with virtually no noise. Suitable for mains or battery operation. 6 transistors—three IF stages—double tuned discriminator. Complete, new, and built up all ready to work on chassis. Size 8 x 4 x 3 in; with tuning scale and slow motion drive. A £12/19/- tuner for only £8/10/-.



FINE RECORD PLAYERS ARE 'GARRARDS'

and because they have been making record players for so long, GARRARD are your best choice—big range always in stock.



LAB90	£25 0 0
8RP12	£3 9 6
AT60	£11 11 0
8P25	£10 9 0

Complete with service sheet and ten 8P25 plates.

3M SCOTCH TAPE

Brand new, unused and guaranteed perfect and not second in any way—a manufacturer's tape on normal spools and in normal boxes.

Standard Play 5in.	600ft.	9/-	Long play 5in.	900ft.	11/6
5in.	900ft.	11/6	5in.	1,200ft.	16/-
7in.	1,200ft.	16/-	7in.	1,800ft.	23/-

£3 post free otherwise add 2/- post and ins.

BATTERY CHARGER—FREE

9 v. Nickel Cadmium Battery type PP3 (fits all popular pocket transistors). Can be recharged 800 times. Price with kit for battery charger only 37/- post and ins. 3/-. Chargeable replacements also in stock for U7, 12/6; U12 32/-.

MAINS TRANSISTOR POWER PACK

designed to operate transistor sets and amplifiers. Adjustable output 6 v., 9 v., 12 volts for up to 600 mA (class B working). Takes the place of any of the following batteries: PP1, PP3, PP4, PP6, PP7, PP9, and others. Kit comprises mains transformer-rectifier, smoothing and load resistor, 5000 and 500 mfd. condensers, zener diode and instructions. Real snip at only 14/6, plus 3/6 post.

HI-FI SPEAKER BARGAIN

12in. High fidelity loudspeaker. High flux permanent magnet type with either 3 or 15 ohm speech coil. Will handle up to 10 watts. Brand new by famous maker. Price 29/6. With built-in tweeter 35/-, plus 3/6 post and insurance.



TUBULAR HEATERS

New and unused made by G.E.C.—rated at 60 watts per ft.—these are ideal in airing cupboards, bedrooms, offices, stores, greenhouses, etc., curtains or papers can touch them without fear of scorching or fire. Supplied complete with fixing brackets and available in the following sizes. Prices which are about quarter of list price includes carriage by B.R.S. 6ft. 30/-, 10ft. 36/-, 12ft. 42/-.

Also in twin assemblies (one pipe above the others) 4ft. 40/-, 6ft. 46/-, 8ft. 52/-.

750 mW TRANSISTOR AMPLIFIER

4 transistors including two in push-pull input for crystal or magnetic microphone or pick-up—feedback loops—sensitivity 5 m/v. Price 19/6



Post and insurance 2/6. Speakers 3in., 12/6; 5in., 13/6; 6 x 4in., 14/6.


PHOTO-ELECTRIC KIT

All parts to make light operated switch/burglar alarm/counter, etc. Kit comprises printed circuit, Laminated Boards and chemicals, Latching relay, Infra-red sensitive Photocell and Hood: 2 Transistors, cond. Terminal block. Plastic case. Essential data, circuits and P.C. chassis plans of 10 photo-electric devices including auto-car parking light, modulated light alarm. Simple invisible ray switch—counter—ultra light alarm—warning tone electronic alarm—projector lamp stabiliser, etc., etc. Only 39/6, plus 2/-, post and insurance.



2 1/2 kW FAN HEATER

3 heat positions to suit changes in weather: 1 kW, 1 1/2 kW and 2 1/2 kW; also blows cold for summer, has thermostatic safety cut-out. Proper price £5/17/6. Yours for only £3/15/-, plus 7/6 post and insurance.



MOVING COIL METER BARGAIN

Panel meters are always being needed and they are jolly costly when you have to buy them in a hurry—so you should take advantage of this offer: 2in. moving coil shaft mounting meters only 5/6. These are actually R.F. meters and cost about £3 each but if you don't want them for R.F. then all you have to do is remove the thermocouple and you will have a 2-3 ma. meter which you can make into almost anything by adding shunts or series resistor. These are ex-government, of course.



PP3 Eliminator—play your pocket radio from the mains! Save £s.

Complete component kit comprises 4 rectifiers—mains dropper resistances, smoothing condenser and instructions. Only 8/6, plus 1/- post.



Be first this year

SEED AND PLANT RAISING

Soil heating wire and transformer. Suitable for standard size garden frame. 19/6. plus 3/6 post and ins.

WALL MOUNTING THERMOSTAT

By Satchwell, intended for use to control tubular or any type of space heaters indoors or in a greenhouse—adjustable over 40/80 complete with mounting screws 29/6, plus post 2/9 (normal price is at least twice this)

Where postage is not definitely stated as an extra then orders over £3 are post free. Below £3 add 2/9.

ELECTRONICS (CROYDON) LIMITED

(Dept. WW), 102/3 TAMWORTH RD., CROYDON, SURREY (Opp. W. Croydon Stn.) also at 266 LONDON ROAD, CROYDON, SURREY

stern-clyne ELECTRONIC CENTRES

MAIL ORDER & ALL ENQUIRIES TO : DEPT. WW, 5 EDEN GROVE, HOLLOWAY, LONDON, N.7. Tel. NORTH 01.607.3161

LONDON:
18 Tottenham Court Road, W.1.
23 Tottenham Court Road, W.1.
308 Edgware Road, W.2.
109 Fleet Street, E.C.4.
162 Holloway Road, N.7.

MUS 5929
MUSeum 3451
PAddington 6943
FLeeT Street 5312
NORTH 7941

9 Camberwell Church Street, S.E.5. RODney 2875
220 Edgware Road, W.2. PADDington 5607
CROYDON: 12 Suffolk House, George Street.
MUNICIPAL 3250
BRISTOL: 26 Merchant Street, Bristol, 1. Bristol 20261

LIVERPOOL: 52 Lord Street Royal 7450
MANCHESTER:
20/22 Withy Grove, M/c 4.
SHEFFIELD: 125 The Moor Blackfriers 5579/5246
NOTTINGHAM: Eastown House, Lincoln St. Sheffield 28993
Nottingham 45899

MEMBER OF THE PANTIYA GROUP OF COMPANIES

INTERCOMS



LOW COST **54/6**
INTERCOM P. & P. 2/6.

Two station system for desk or wall mounting, also suitable as a Baby Alarm. Calling can be made

from either station even if switch is in OFF position. Transistor circuit, output 50 mW. Size of each unit 3 x 2 x 4in. Uses one 9 volt battery. Complete with 66ft. connecting cable and fitted jack plugs, staples, fixing tape, battery and instructions.

DE LUXE INTERCOM/BABY ALARM

Superb professional compact transistor intercom. So sensitive—picks up normal breathing from several feet away. Powerful 3-transistor amplifier has 200 mW output and operates from one 9 volt battery. Master station has Volume, On/Off and Listen/Talk Controls. Supplied with 66ft. connecting lead ready fitted with phone plugs, staples, location tape, battery and full instructions. Complete in attractive **£4.9.6** P. & P. gift carton.



* stern-clyne's TREMENDOUS PRICE BREAKTHROUGH in NEW UNIVERSAL RECORDING TAPES

- TENSILIZED—pre-stretched, extra strong.
- Full frequency spectrum response.
- Guaranteed playing times.

STERN-CLYNE make huge bulk purchases of recording tapes from the world's biggest manufacturers—and hand on the enormous price advantage to their customers. The quality is unequalled: Tensilized to ensure the most permanent type of base. Highly resistant to breakage, moisture, heat, cold or humidity. Highly polished, splice-free finish. Smooth output throughout entire audio range.

Tape Type	Length	Price	Notes
TENSILIZED P.V.C.	3in. 250ft. Long Play	5/6	Both types Post and Packing 1/- per reel. Four or more reels post free.
	5in. 600ft. Standard	8/6	
	5in. 900ft. Long Play	10/-	
	5 1/2in. 1,800ft. Long Play	12/6	
	7in. 1,200ft. Standard	12/6	
	7in. 1,800ft. Long Play	15/-	
TENSILIZED POLYESTER	3 1/2in. 600ft. Double Play	11/6	
	5in. 1,200ft. Double Play	15/-	
	5 1/2in. 1,800ft. Double Play	22/6	
	5 1/2in. 2,400ft. Triple Play	37/6	
	7in. 2,400ft. Double Play	25/-	
	7in. 3,000ft. Triple Play	50/-	

TRIPLE BARGAIN OFFER

2-reel packs of 3in. Professional quality tape in self mailing boxes with fill-in address label on reverse. Works on all tape recorders. 250ft. per **13/6** P.&P. reel. Famous Audio Magnetic brand. 1/6

DE LUXE FOUR-STATION INTERCOM

Identical in style and presentation to the De-Luxe 2-station model described above, but complete with 4-station control master unit and 3 identical sub-stations complete with three, separate ready plugged, 66ft. long connecting leads.

£7.19.6 P. & P. 5/-.

EDEN 7-STATION INTERCOM

● High grade Office Model ● Easily installed and maintained. Master Unit contains powerful, highly sensitive all-transistor amplifier and uses standard torch batteries. Control panel carries all switching and indicator lights to identify calling sub-station. System permits sub-stations to be called separately or simultaneously and for sub-stations to call Master Unit independently. All units are housed in attractively styled metal cases. Supplied complete with Master Station, six sub-stations, all interconnecting cable, batteries and full instructions.

Terms: Deposit **£8/6/-** and 12 monthly payments of **£15/2/-**. Total credit price **£218/-**.




£18.18.0

Carr. & Ins, 8/6.

SEND FOR CATALOGUE

A 1/- P.O. brings new 100-page Sound and Science Catalogue packed with unique items; profusely illustrated.

COMMUNICATIONS RECEIVER CR 150

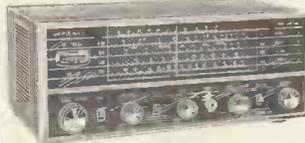


New, advanced design provides fantastic sensitivity. Compact and attractive as a drawing-room radio but packed with communications engineering features to bring in the most distant stations loud and clear. Continuous coverage from 540 K to 30 Mc/s. takes in all broadcast

Now only **£19.10.0**

Deposit **£6.10.0**
12 months **£1.5.10**
Total credit price **£22.0.0**.
Carriage & Insurance 15/-.

bands, shipping, world-wide short wave and Ham radio. Built-in features include extra large tuning dial, extending rod aerial, "S" meter, B.F.O., Noise Limiter, extra quality loudspeaker, etc. Meticulously constructed, handsomely finished. Essential for superb reception but cheaper than many domestic radios. Size only 13 1/2 x 5 x 8in. Standard mains operation.

New, bookshelf-size MEGAMITE Speaker System * carr. 7/6



Features include:

- Full frequency range
- Employs specially designed free-cone bass unit
- Includes matching tweeter and crossover
- Handles 10 watts output

Special 5in. free-cone bass unit uses enormously powerful Feroba magnet to obtain the exceptional cone movement needed to get clean, deep-down bass response equal to much larger speaker performance. Matching 4in. tweeter and crossover is housed with bass unit in heavily lagged, handsome teak veneered cabinet, size only 13 x 7 x 8in. deep. Mounts vertically or horizontally. Ideal for modern hi-fi systems where clean, unobtrusive appearance with high performance is required.



SULTAN Solid State Integrated Stereo Amplifier

The Stern-Clyne SULTAN represents a considerable advance in solid-state, high fidelity stereo amplifiers. Outstanding performance is allied to meticulous construction, comprehensive facilities, installation simplicity and attractive functional styling.

SULTAN performance is a natural result of superb design incorporating the most advanced fully proved semi-conductors, and modular substage construction that permits searching quality control and precise matching at every stage of assembly. Particular attention has been given to the provision of all the additional input, output, and power take-off facilities ever likely to be required. The compact sized, craftsman finished teak cabinet and restrained styling ensures unobtrusive, harmonious matching with almost any decor.

KIT OF PARTS: £29.8.0

Terms: Deposit **£9/16/-** and 12 monthly payments of **£1/16/10**. Total credit price **£31/18/-**.

ASSEMBLED AND TESTED £39/18/-

Terms: Deposit **£13/6/-** and 12 monthly payments of **£2 8/10**. Total credit price **£42/12/-**.

Carriage and Insurance 8/6.
● Descriptive leaflet free on request.

● Assembly Manual available separately 5/6 incl. P. & P.



VERITONE SATURN F.H. TUNER WITH CASE

Price **£27.6.0**

Terms: Deposit **£9/2/-** and 12 monthly payments of **£1/14/6**. Total credit price **£29/16/-**.

Carr. & Ins. 7/6.

A mains operated solid-state tuner that provides superb reproduction of V.H.F./F.M. broadcasts. Specially designed to complement the Sultan, but it is also suitable for use with all amplifiers of the highest quality. Sensitivity is such that first class reception is assured in all areas where

signal strength is greater than extraneous noise; low drift characteristic in conjunction with a highly effective AFC ensure a constant signal. Available as a compact shelf mounting unit in teak cabinet or as a chassis mounted unit suitable for side-installation with existing equipment.

BRADFORD 10 North Parade. Tel. 25349. (Half-day Wed.)

BRISTOL 14 Lower Castle St. (Half-day Wed.) Tel. 22904.

BIRMINGHAM 30-31 Gt. Western Arcade. Opp. Snow Hill station. Tel. CENTRAL 1279 (No half-day). Larger premises now open.

DARLINGTON 13 Post House Wynd (Half-day Wed.). Tel: 68043

DERBY 26 Osmaston Rd. The Spot. (Half-day Wed.). Tel. 41361.

EDINBURGH 133 Leith St. Tel. Waverley 5766 (Half-day Wed.).

GLASGOW 326 Argyle Street. Tel. CITY 4158 (No half-day).

HULL 91 Paragon Street. (Half-day Thursday). Tel. 20505.

R.S.C.
HI-FI CENTRES LTD.

MAIL ORDERS TO: 102 Hencounter Lane, Bramley, Leeds, 13. Terms: C.W.O. or C.O.D. No C.O.D. under £1. Postage 2/6 extra under £2. 5/0 extra under £5. Trade applied. S.A.E. with all enquiries please. Hi-Fi Catalogue price 3/3 post paid. Personal shoppers welcomed at our Hi-Fi CENTRES also. OPEN ALL DAY SATS. Except High Holborn.

LEICESTER 32 High Street. (Half-day Thurs.) Tel.: 56420.

LEEDS 5-7 County (Mecca) Arcade, Briggate (No half-day). Tel.: 28252

LIVERPOOL 73 Dale St. (No half-day). Tel. CENTRAL 3573.

LONDON 238 Edgware Rd. W.2. (Half-day Thurs.). Tel.: PAD 1629.

96 High Holborn, W.C.1. Tel.: HOL 9874. Half-day Sat

MANCHESTER 60A-60B Oldham St. (No half-day). Tel.: CENTRAL 2778.

MIDDLESBROUGH 47096 106 Newport Rd. (Half-day Wed.).

NEWCASTLE 41 Blackett St. (Half-day Wed.). Tel.: 21469.

SHEFFIELD 13 Exchange St., Castle Market Bldgs. (Half-day Thursday) Tel.: 20716.

R.S.C. STEREO/20 HIGH FIDELITY AMPLIFIER
Providing 10/14 WATTS ULTRA LINEAR PUSH-PULL OUTPUT ON EACH CHANNEL

Features include:

- ★ Four-position tone and compensating input Selector switch.
- ★ Stereo Mono switch so that peak monaural output of 26 watts can be obtained.
- ★ Separate "Bass", "Lift" and "Cut" and "treble" "Lift" and "Cut" controls.
- ★ Neon panel indicator.
- ★ Handsome Perspex Frontplate. Complete set of parts with point-to-point wiring diagrams and Instructions or Factory assembled, tested and supplied with Carr. 12 months' guarantee for 19 gns. or DEPOSIT £3 and 9 monthly payments 43/2 (Total 12/6. £22/4/6) SUITABLE for "MIKE" GRAM, RADIO OR TAPE. FOR HOME OR STUDIO. Employing valves ECC83, ECC85, ECL86, ECL86, ECL86, ECL86, ECL86. Output transformers are high quality sectionally wound to required specifications. Output matchings for 3 and 15 ohm speakers. FREQUENCY RESPONSE: 20-20,000 c.p.s. HUM LEVEL - 65dB. SENSITIVITY: 15 millivolts. HARMONIC DISTORTION 0.2 per cent. For 200/250 v. A.C. mains. Send S.A.E. for leaflet.



ALL LEADING MAKES OF HI-FI EQUIPMENT CASH OR TERMS.

R.S.C. STEREO 10 HIGH QUALITY AMPLIFIER
Valves E281, ECC83, ECC85, EL84, EL84. Separate bass and treble controls giving "cut" and "boost." Sensitivity 50 mV. 5 watts high quality output on each channel. Can be used as straight 10 watt amplifier. Controls: Stereo/Monaural switch, ganged volume, ganged treble, ganged bass and balance. Output for 3 ohm speaker. Point-to-point wiring diagrams and instructions. Or assembled and tested 11 gns. Deposit 3/6 and 9 monthly pmts. 25/5 (Total £13/4/9). S.A.E. for leaflet. Carr. 11/6. **£8/15/0**

AUDIOTRINE HI-FI TAPE RECORDER KIT.

Only 4 pairs of soldered joints plus minor.

Build a high quality recorder in the £50 class for only **26 7/8 Gns.** Carr. 19/6

Can be assembled in one hour. S.A.E. for leaflet. 26 7/8 Gns. Carr. 19/6
2 track 3 gns. extra OR DEPOSIT 4 gns. and 9 montly payments of 59 6 (Total 29) gns.). Cash price if settled in 3 months.
INCORPORATING THE LATEST MAGNAVOX TAPE DECK, THE AUDIOTRINE HIGH QUALITY TAPE AMPLIFIER, A HIGH FLUX 7 1/2 in. LOUDSPEAKER, Reel of Best Quality TAPE, Spare Tape Spool, a Portable Cabinet: size approx. 17 1/2 x 14 1/2 x 8 1/2 in. finished Grey leathercloth with Silver trim and chrome fittings. Connection diagram for wiring amplifier to deck provided. FEATURES INCLUDE ★ 3-SPEEDS ★ FREQUENCY RESPONSE 50-11,000 cps. ★ SWITCHED TONE COMPENSATION FOR EACH SPEED ★ OUTPUT 4 WATTS ★ MAGIC EYE RECORDING LEVEL INDICATOR ★ HEAVY DUTY MOTOR ★ TAPE MEASURING & CALIBRATING DEVICE ★ TAKES FULL 7 in. DIAMETER REELS OF TAPE ★ NEGLIGIBLE HUM ★ ENTIRELY EFFECTIVE AUTOMATIC ERASURE.



HIGH FIDELITY LOUDSPEAKER ENCLOSURES

All types are of pleasing modern design acoustically lined and ported, and in alternative finishes of light teak or medium walnut.

SE8. Size 16 x 11 x 8 in. Gives pleasing results with an 8 in. Hi-fi speaker. Only **3 Gns.**



SE10. For High-Fidelity Speaker with provision for tweeter. Size 24 x 15 x 10 in. Carr. 10/- **£6/19/9**

SE8. Designed for optimum performance with any Hi-Fi 8-in. spkr. Size 22 x 15 x 9 in. Carr. 7/6. **£5/19/9**



SE12. For outstanding performance with any 12in. Hi-Fi speaker. Tweeter cut-out provided. Size 24 x 20 x 10in. Carr. 10/- **8 Gns.**

HIGH FIDELITY LOUDSPEAKER UNITS

All types have handsome cabinets, of latest styling finished in Satin Teak or Walnut, acoustically lined and ported.

MINI-8 8 watt rating. 3 or 15 ohm. Response 50-13,000 c.p.s. Specially designed high flux 5in. speaker with low fundamental resonance. Size 9 3/4 x 6 1/2 x 7 1/2 in. Carr. 7/6. **£6/19/11**



THE DORSET. Size 16 x 11 x 8 in. Response 45-18,000 c.p.s. Rating 10 watts. Fitted Audiotrine HF 811D speaker. Impedance 3 or 15 ohms. Carr. 7/6. **£7/15/0**

THE GLOUCESTER. Size 24 x 20 x 10in. Fitted 12in. high flux 12,000 line speaker, Cross-over unit, and Tweeter. Rating 10 watts. Smooth response. 40-20,000 c.p.s. Impedance 15 ohms, **12 Gns.** Carr. 15/-.



THE DORCHESTER. Size 24 x 15 x 10in. Fitted Audiotrine HF101D Speaker. Rating 12 watts. Frequency response 30-20,000 c.p.s. Impedance 3 or 15 ohms. Carr. 15/- **12 Gns.**

THE BRONTE. Size 22 1/2 x 9in. Fitted Wharfedale Super 8 KSDD or Audiotrine HF 815D Speaker, with Roll Surround and dual cone 6-10 watt. Impedance 12 1/2 Gns. 3 of 15 ohms. Carr. 15/-.



TERMS ON ENCLOSURES AND UNITS
Deposit 3/- in the £ of quoted price. Balance over 3 months.


R.S.C. SUPER 15 HI-FI AMPLIFIER R.S.C. SUPER 30 STEREO AMPLIFIER

FULLY TRANSISTORISED

- ★ 200-250 v. A.C. Mains Operation
- ★ OUTPUT R.M.S. CONTINUOUS 10 WATTS into 15 ohms. 15 WATTS into 8 ohms. Send S.A.E. for leaflet.
- ★ Max. Instantaneous Peak Power Output 28 watts
- ★ PRINTED CIRCUIT CONSTRUCTION
- ★ LATEST MULLARD TRANSISTORS AD 149 (2), OC127Z, OC81Z (2), OC44 (3) AC107 (Total of 8).
- ★ 5-POSITION INPUT SELECTOR SWITCH EQUALIZATION to Standard R.I.A.A. and C.C.I.R. Characteristics for Gram and Tape Heads.
- ★ FULL TAPE MONITORING FACILITIES
- ★ SENSITIVITIES: Magnetic P.U. 4 mV. Crystal or Ceramic P.U. 400 mV. Microphone 4.5 mV. Tape Head 2.5 mV. Radio/Aux. or Ceramic P.U. 110 mV.
- ★ NEGATIVE FEEDBACK 52 dB.
- ★ FREQUENCY RESPONSE: 20-20,000 c.p.s. ± 2dB.
- ★ TREBLE Control + 15 dB. to - 14 dB. at 10 kc/s.
- ★ BASS Control + 12 dB. to - 15 dB. at 50 c/s.
- ★ HARMONIC DISTORTION AT 10 watts R.M.S. 1,000 c.p.s. 0.25%.
- ★ HUM LEVEL: - 75 dB.

TECHNICAL SPECIFICATIONS COMPARE MORE THAN FAVOURABLY WITH SIMILAR AMPLIFIERS OFFERED AT TWICE THE COST

Complete kit of parts with full constructional details and point-to-point wiring diagrams. Only **11 Gns.** Carr. 11/-



All parts, point-to-point wiring diagrams and detailed instructions. **18 1/2 Gns.** Carr. 18/9. Unit factory built 25 1/2 gns. or Deposit 83/9 and 9 monthly payments 56/9 (Total £29/14/6). Fitted cabinet as above. 29 1/2 gns. Carr. 15/- Or Dep. £4/14/9 and 9 mthly. pmts. 65/10. (Total £34/7/3).

A DUAL CHANNEL VERSION OF THE SUPER 15 Employing Twin Printed Circuits

- ★ Matched Components.
 - ★ Close Tolerance Ganged Pots.
 - ★ CROSS-TALK - 52 dB. at 1,000 c.p.s.
 - ★ CONTROLS: (1) 5 Position Input Selector. (2) Bass. (3) Treble. (4) Volume. (5) Balance. (6) Stereo/Mono Switch. (7) Tape Monitor Switch. (8) Mains Switch.
 - ★ INPUT SOCKETS (Matched Pairs): (1) Magnetic P.U. (2) Ceramic or Crystal P.U. (3) Radio/Aux. (4) Tape Head/Mic. Operation of the Input Selector Switch assures appropriate equalization.
 - ★ Rigid 18 s.w.g. Chassis. Size 12 x 3 x 8in.
 - ★ Attractive Rigid Perspex Face Plate and Spun Silver Matching Knobs.
 - ★ NEON PANEL INDICATOR.
- Above facilities, etc., except for Gauging and Balance Control, apply also to Super 15. ALL HIGH GRADE COMPONENTS, ETC. THESE UNITS ARE EXCLUSIVELY SUITABLE FOR USE WITH ANY MAKE OF PICK-UP OR MICROPHONE (Crystal, Ceramic, Magnetic, Moving Coil, Ribbon). SUPERB SOUND OUTPUT CAN BE OBTAINED BY USING WITH FIRST RATE ANCILLARY EQUIPMENT.

AUDIOTRINE HI-FIDELITY LOUDSPEAKERS



Heavy cast construction. Latest high efficiency ceramic magnets. Dual Cone for extended frequency range. Plastic treated surround giving low resonant frequency. Response 40-20,000 c.p.s. Impedance 3 or 15 ohms. Carr. 5/8.

HF811D 8in. 10 WATT 4 gns.
HF101D 10in. 10 WATT 5 gns.
HF1001D 10in. 15 WATT £5/15/-
HF121D 12in. 20 WATT £6/15/-
HF127D 12in. 30 WATT 9 gns.

AUDIOTRINE HI-FI SPEAKER SYSTEMS


Provides a smooth frequency response from 40-20,000 c.p.s. Consisting of 12in. 12,000 line 15 ohm speaker. Crossover Unit and Tweeter. Highly recommended for use with any High-Fidelity Amplifier

10 Watt Unit **5 Gns.** Carr. 6/9.
20 Watt Unit with extra heavy bass speaker **7 gns.** Carr. 8/9.



R.S.C. TFM1 TRANSISTORISED VHF/FM RADIO TUNER

- ★ 200-250 v. A.C. Mains operation
- ★ High Sensitivity
- ★ Drift-free reception
- ★ Sharp A.M. Rejection
- ★ Output ample for any amplifier approx. (500 mV.)
- ★ Simple alignment instructions
- ★ Outputs available for feeding tuning meter
- ★ Output for feeding Stereo Multi-plexer
- ★ Tuner head using Silicon Planar Transistors
- ★ Designed for standard 80 ohms co-axial input
- ★ Stereo Multiplexer now available.



Total cost of parts with detailed wiring diagrams and instructions. **12 1/2 Gns.** Carr. 10/-.

Or factory built, 15 1/2 gns. Or in Teak finished cabinet as illustrated 19 1/2 gns. Terms: Deposit 65 and 9 mthly. pmts. 39/- Total £22/11/-.



RP2 HI-FI SINGLE RECORD PLAYING UNITS. Consisting of the popular Garrard SP25 turntable and Goldring CS90 High compliance ceramic Cartridge with diamond stylus. Fitted on Plinth as above and complete with Clear Perspex cover. Ready to 'plug in' to any Hi-Fi amplifier. (Normal Price £25.) **TERMS: Deposit 3 Gns. and 9 monthly payments 43/7. 19 1/2 Gns.** (Total £22/15/3). Carr. 15/-.

MODEL RP3. As above but with Goldring Lenco GL 68 Transcription Unit and CS 90 Cartridge. Normally over £33. Our price **26 1/2 Gns.** Terms available. Carr. 15/-.

NEW MART

Dept. WW2
33 WITHY GROVE, MANCHESTER 4.
 Telephone: DEAnsgate 7710

FREE GIFT OFFER

OF A BRAND NEW WORLD FAMOUS E.M.I. FISK SOLARISCOPE VALUE £2/2- WITH EVERY ORDER VALUE £5 AND OVER. THIS UNIQUE INSTRUMENT WHICH IS A BOOM TO SHORT WAVE LISTENERS CLEARLY SHOWS THE AREAS OF DAYLIGHT AND DARKNESS ALL OVER THE EARTH AT ANY GIVEN HOUR.

MINI-MOTORS. 3 v. to 4.5 v. operation. Ideal for mini-racing cars, models and toys. "Large" (1 1/4 x 1/2 x 1 1/2 in.) 3/11. Medium (1 x 3/8 x 1 1/2 in.) 3/3. P. & P. 9d. each.

BRAND NEW! Why use Sapphire Stylus in your record-player when at very little extra cost you can have a first-grade

GENUINE DIAMOND STYLUS

PRICE 7/11 plus 6d. P. & P. Available as replacements for the following popular types only at present:—
 BSR TCSLP BSR TCS STEREO BRS.TCS LP/STEREO-COLLARO STUDIO "0"
 LP/RONETTE — GARRARD GCS LP — ACOS GP 65/67LP — RONETTE BF40/LP
 — GARRARD GC2 LD. ALL FULLY GUARANTEED.

SPEAKERS. A few items from our range: 12in. ROUND, high quality, British, fitted tweeter cone. 6 watts—available in 30 or 150Ω. Wonderful value at 29/6. P. & P. 3/6. 12in. HORN. B & A 31 25/6. P. & P. 3/6. 15 x 8in. 67 ITAL SPECIAL. E.M.I. 15Ω 20 watt £9 5/-. Carr. Paid. 2in. ROUND. Best British make, 80Ω 8/8. P.P. 1/6.

TWEETER. 2 1/2in. Black plastic cone, round on Square Frame. E.M.I. 30—12/6, plus 1/6 P. & P. A. HORN Speaker, 8Ω 15 watt, 8 x 9in. Swivel mounting brackets. £5 5/-. Carr. Paid. Many other sizes and types available from 2in.

MICROPHONES. LAPEL/HAND MIKE—1 1/2in. dia. Lapel Clip, ideal for tape recording. With lead. Very sensitive 7/6. P. & P. 1/-.
CRYSTAL HAND MIKE. Robust and sensitive. Cream plastic case. Just the thing for tape recorders 8/6. P. & P. 1/6.

ACOS MIC 40—World famous Desk Mike 13/9 plus P. & P. 1/3.
ACOS MIC 45—Stylish Carved Hand Grip Crystal Mike 14/6 plus P. & P. 1/6.
ACOS MIC 60—"Stuck" Type Crystal Mike 18/6 plus P. & P. 1/6.
ACOS Round Crystal Inverts lin. dia. 6/6; 1 1/2in. dia. 7/6. P. & P. 6d. on ether.
DYNAMIC HAND/DESK TYPE. 50KΩ with cable and plug to suit most recorders, etc. 18/9. P. & P. 1/3.

DYNAMIC HEAD. 50KΩ for use with stand. Most attractive, used by many professionals and groups 49/-. P. & P. 2/6.
TELESCOPIC FLOOR STAND, HEAVY BASE. Standard thread. Suits above or any other mike 49/6. Carr. & Pkg. 2/6.
TELEPHONE PICK-UP COIL. For recording or amplifying both sides of telephone conversation. Suction cup fitting to Telephone, with lead 7/6. P. & P. 1/-.
 MANY OTHER TYPES AVAILABLE.

INTER-COMM. DE-LUXE 2-WAY. Ideal for offices, workshops, theatres, etc. Highly efficient, safe BABY ALARM. No mains—works off P23 battery, which lasts for months, obtainable everywhere. Buzzer call system, complete with lead, plugs, battery, in handsome carton. 63/-. P. & P. 2/6.

PICK-UP ARM. Lightweight, with T/O crystal cartridge and styl for L.P. and 78 r.p.m. records on base with rest 27/6. P. & P. 2/6.

DYNAMIC (50KΩ) mike for stand use. Very attractive design with punched chrome finish. Swivel action with stand mounting brackets 48/-. P. & P. 2/6. (Suitable heavy base floor stand, telescopic, standard thread 49/6. Carr. 2/6.)

4 TRANSISTOR 3 W. AMPLIFIER. Size 2 1/2 x 2 1/2 x 1 1/2, 3, 8 or 15Ω output. 9 volt battery operated. Highly sensitive. Price (less battery) 52/6. P. & P. 1/6.

VERNIER DIALS—fits standard 1/2in. spindle—approx. 8:1 ratio. Marked 0/100 through 180°. Small round 2in. dia. 10/6. Large 3in. dia. 12/-. Post on either 1/3.

MAINS TRANSFORMERS. 350/0,350, 80 mA, 6 v. and 6.3 v. at 2 amp. Chassis mtg. 230 v. or 110 v. I.N. Size 4 x 3 1/2 x 2 1/2 in. 21/6 ea. P. & P. 2/-. Voltage Dropping Transformer, 230 v. I.N. 3.5 v. 9 v. and 17 v. out at 4 amps. Many uses. Ideal for Battery Chargers, etc. 5 x 2 1/2 x 2 1/2 in. 22/6 ea. P. & P. 2/6.

RECORD PLAYER DECKS. GARRARD		
SRP12	3-SPEED SINGLE PLAYER	£4 5 6
SP25	DELUXE 4-SPEED SINGLE PLAYER	£9 9 6
MODEL 1000	4-SPEED AUTO-CHANGE	£5 19 6
ATS MK HA	4-SPEED DE LUXE AUTO-CHANGE	£8 19 6
MODEL 3000	4-SPEED AUTO-CHANGE	£8 10 0

All latest models. All fitted Mono Cartridge, Stereo 19/- extra. Carr. & Pkg. all models 7/6 (except SPR 12, 5/-), but price includes free gift.

PICK-UP CARTRIDGE REPLACEMENTS
 STANDARD FINING FOR MOST RECORD-PLAYER ARMS. ALL TURN-OVER TYPES WITH STYLUS FOR L.P. & 78 RPM.
 ACOS GP/67-2 MONO 12/6 each.
 ACOS GP/91-1 MONO-DE-LUXE 17/6 each.
 ACOS GP/73-2 STEREO 25/- each.
 Postage and packing 9d. each.

Finest Quality British made MYLAR Recording Tape. Fully Guaranteed.
 3in. 225 Message 5/-
 5in. 600 Standard Play 8/6
 5in. 850 Standard Play 11/6
 7in. 1200 Standard Play 14/6
 5in. 900ft. Long Play 11/3
 P. & P. 1/- per reel. Four reels and over post paid. N.B.—MYLAR-based recording tape is of infinitely superior quality and far stronger than Acetate base tape.

MULTI-TEST METER. Pocket size—4 1/2 x 3 1/2 x 1 1/2 in. 20,000Ω p.volt.
 D.C. Volts (20,000Ω P.V.) 0/5/25/250/500/2500
 D.C. Current 0-50 microamps.
 2.5mA/250mA

A.C. Volts (10,000Ω P.V.) 0/10/50/100/500/1000
 Capacity: 10μF to 0.01μF/100μF to 1μF
 Resistance: 0/5kΩ — 0/6 megohms
 Description: — 20 to +22 dB.
 COMPLETE with batteries, instructions, leads 72/6. P. & P. 1/6.
 Other types available from 3/6.

TRANSISTORS. Some popular types from our range:—
 OC44 and OC45 3/6 each. OC71 2/9. OC72 3/6. OC81 and OC81D 3/- each.
 OC169 3/9. OC170 3/6. AF117 4/-. OC26 7/6. GET3 5/9. General purpose (Approx. OC71) 1/- each. Postage 6d. up to 3. Over 12 sent P. & P. paid.

R.F. FIELD INDICATOR. Ideal for use with radio controlled models. Causes radiation from existing antenna. Tunes 1 to 250 Mc. in 5 bands. Sensitive 200 mA meter movement. 5 section plug-in aerial. Phone jack and crystal earpiece for monitoring. No battery required. Powerful magnet for attaching to metal surfaces. Complete with instructions. 47/6. P. & P. 2/6.

TERMS. Cash with order—No C.O.D. Orders totalling £5 and over sent carriage paid (excepting Record player decks and Transceivers where carriage is shown). Guaranteed money refunded if goods returned perfect within 7 days of despatch.

REMEMBER THE NOVEL FREE GIFT EXCLUSIVE TO US!
 Callers welcome Very many more lines to choose from. Open 9.30 a.m.—6 p.m. Mon.—Sat

PRE-PAK SEMICONDUCTORS

BY DAVIS & WHITWORTH LTD.
 222-224 WEST ROAD, WESTCLIFF-ON-SEA, ESSEX
 PHONE: SOUTHEAD (0502) 46344

No.	DESCRIPTION	PRICE	TRANSISTORS	PRICE
A1.	6—Silicon rectifiers BY100 type	20/-	AE114	4/-
A9.	10—Relays, mixed types and voltages	20/-	AF115	3/-
A3.	20—Mixed, marked and tested trans.	20/-	AF116	3/-
A5.	8—Sil. recs. 100-400PIV, 0.5-1A	20/-	AF117	4/-
A7.	1—500 Mcs epitaxial mesa. PNP 2N700	20/-	AF118	3/6
A8.	6—Sub. min. zeners, 3.0-15V, 400mW	20/-	AF119	3/6
A9.	1—2N174 real power trans. 80v., 150W	20/-	AF178	10/-
A12.	1—High power, high volts, 25024, 100V 100W	20/-	BBY95A	5/-
A13.	25—Assorted trans. and diodes, all new	20/-	GET102	2/6
A14.	4—2N601 p/trans. germ. 30V 10Mc/s	20/-	GET114	2/6
B1.	50—Unmarked, untested, trans. new	10/-	NET213	2/6
B2.	4—Solar cells, Inc. Book of ins.	10/-	NET262	2/6
B3.	4—OA5 good bonded diodes, Mullard	10/-	OC41	2/6
B4.	20—Germ. diodes, 50PIV, 40Mc/s	10/-	OC44	2/6
B5.	6—Matched set, OC44/45/81D/81	10/-	OC45	2/6
B7.	1—60 watt power trans. 5Mc/s NPN	10/-	OC72	2/6
B8.	2—Power trans. OC26/35 type	10/-	OC73	5/-
B9.	1—Light sensitive cell, ORP12 type	9/-	OC81	2/6
B10.	1—50V trans. germ. INP, latest type	10/-	OC81D	2/6
B12.	1—Tunnel diode, AEX11, 1050Kc/s	10/-	OC83	4/-
B13.	7—RAL15 G.B. diodes T.V. video	10/-	OC139	2/6
B15.	8—Bi-directional trans., ASY66	10/-	OC140	5/6
B20.	4—Assorted NPN trans., TO-5, TO-18	10/-	OC170	2/6
B21.	2—Sil. recs. 10 amp., 60-100PIV	10/-	OC171	4/-
B32.	4—1 amp. recs. 200/300 PIV	10/-	OC200	5/-
B33.	10—Germ. diodes, assorted types	10/-	OC201	8/-
B34.	8—Silicon diodes, assorted types	10/-	OC301	2/6
B35.	2—2 zener diodes 1 1/2W., 7 and 10 volts	10/-	OC302	2/6
B36.	10—Gold bonded diodes, assorted	10/-	OC344	2/6
C2.	1—Uni junction, 2N2180 or 2N2846	15/-	OC371	2/6
C4.	2—RF power trans., OC22 and BUY11	15/-	OC897	5/-
			2N706	5/-

FIRST EVER LOGIC KITS. Learn for yourself how computers work, even make one for yourself. Full instructions for a noughts and crosses machine, binary counters, timers, etc. L.1. 5 gns. L.2. 10 gns. No need to purchase both kits, you can start with L.2. which incorporates L.1. DETAILS FREE.

MAKE A REV COUNTER FOR YOUR CAR. THE "TACHO BLOCK". This encapsulated block will turn any 0-1 mA meter into a perfectly linear and accurate rev. counter for any car. **20/-each**

NO CONNECTION WITH ANY OTHER FIRM. MINIMUM ORDER 10/- CASH WITH ORDER PLEASE. For complete lists and substitution charts send 1/- in stamps, add 1/- post and packing. OVERSEAS ADD EXTRA FOR AIRMAIL.

WW—137 FOR FURTHER DETAILS

SKANDIA HF SSB Handy, Portable & Fixed VHFAM UHF FM TRANSCEIVERS

"SKANDIA SSB-10W"
 Solid State HF SSB 10W
 PEP Portable/Mobile/Fixed
 Multi-purpose Transceiver



Other products
 ★ AM/FM MPX Stereo Tuner Amplifier.
 ★ 8 track 4 channel Cartr dge Stereo Tape Player.

Manufacturers & Exporters:

TOMURA BUSSAN KAISHA LTD. C.P.O. Box No. 118
 Nagoya, Japan. Cable Add.: "SKANDIA" Nagoya.

VITALITY



Miniature and Sub-Miniature Indicator Bulbs in sizes from 4.5mm

Catalogue from
VITALITY BULBS LTD
 MINIATURE LAMP SPECIALISTS


BEETON'S WAY, BURY ST. EDMUNDS, SUFFOLK. TEL: 2071 STD 0284/2071
 WW—138 FOR FURTHER DETAILS

VIKING TRANSISTOR

40-50 WATT AMPLIFIER

OPERATING INSTRUCTIONS.


GENERAL. An extremely reliable lightweight amplifier capable of giving 40-50 watts of undistorted sound, made possible by the use of the latest semi-conductors (transistors) and techniques which ensure space-age reliability under the most rugged conditions. It is designed as a general purpose amplifier particularly suitable for use with musical instruments that require exceptionally high treble response (not recommended for Bass Guitar). Tremolo facilities are available on Channel 1 only. **INPUTS—CONTROLS—CHANNEL 1 (Tremolo).** This contains two high gain input jack sockets controlled by Volume Control 1 which is mounted directly above the two sockets marked Tremolo. **BASS I.** Gives a controlled boost to the lower frequencies on Channel 1 only. **TREBLE I.** Gives a controlled boost to the high frequencies on Channel 1 only. **TREMOLO.** This operates on Channel 1 only and the variations of intensity and speed of the Tremolo beat is adjusted by the controls DEPTH and SPEED. A socket is provided in the rear of the amplifier so that the Tremolo may be switched on and off by the use of a footswitch plugged into the socket. If you wish the Tremolo to be used without the footswitch, this is possible as the footswitch is only used to short out the effect. **INPUTS AND CONTROLS—CHANNEL 2 (Normal).** This contains two high gain input jack sockets controlled by Volume Control 2 which is mounted directly above the sockets marked Normal. **TREBLE.** Gives a controlled boost to the treble frequencies on Channel 2 only. **MAINS VOLTAGE.** Fully adjustable. 200-250 volts A.C., 50 cycles. **POWER OUTPUT** 40-50 watts sine wave British rating. Very little distortion. **OUTPUT IMPEDANCE** 3 ohms. Price 21 gns., plus £1 postage and packing.

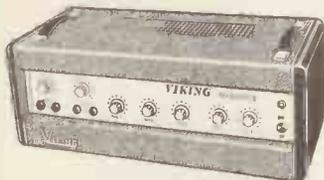

'ELEGANT SEVEN' MK IIA

SPECIAL OFFER

- 7in. x 4in. P.M. Speaker at no extra charge. Power supply kit to purchasers of "Elegant Seven" parts, incorporating mains transformer, rectifier and smoothing condenser, A.C. mains 200/250 volts. Output 9 v. 100 mA, 7/6 extra.
- ★ De luxe grey wooden cabinet size 12½in. x 8½in. x 3½in.
- ★ Horizontal easy to read tuning scale printed grey with black letters, size 11½in. x 2in.
- ★ High "Q" ferrite rod aerial.
- ★ I.F. neutralization on each separate stage.
- ★ D.C. coupled push pull output stage with separate A.C. negative feedback.
- ★ Room filling output 350 mW.
- ★ Ready etched and drilled printed circuit board back printed for foolproof construction.
- ★ Fully comprehensive instructions and point-to-point wiring diagrams.
- ★ Car aerial socket.
- ★ Fully tunable over medium and long wave. 168-535 metres and 1,250-2,000 metres.
- ★ All components, ferrite rod and tuning assembly mount on printed board.
- ★ Full after sales service.
- ★ Parts list and circuit diagrams 2/6, free with parts.



ONLY £4.40 Plus 7/6 P. & P.
Buy yourself an easy to build 7 transistor radio and save at least £10. Now you can build this superb 7 transistor superhet radio for under £4/10/-.
No one else can offer such a fantastic radio with so many de luxe star features.

WOLSEY U.H.F. AERIAL AMPLIFIER, two-stage, gain 23 dB, noise factor 8 dB, power consumption 6 mA at 14 volts. Two AF186 transistors, complete with built-in power supply in metal case, list price 9 gns. Our Price 4½ gns., plus 2/6 postage and packing.


MAINS TRANSFORMER, primary 200/250 volts, secondary 425/425 volt, 250 mA, 6.3 volt 4 amp, 5 volt 3 amp; fully shrouded, chassis mounting. Price £2/5/-, plus 7/6 postage and packing. Auto transformer step-up-step-down, 240/110 volt 400 watt. Price £1/5/-, plus 7/6 postage and packing.

MAINS TRANSFORMER, 200/250 volt, secondary 250/250 volt 70 mA 6.3 volt, 3 amp drop-through. Price 12/6, plus 4/6 postage and packing. Elac 10in., 10,000 lines ceramic magnet, 3 or 15 ohms 7 watt. Price £1/9/6, plus 4/6 postage and packing.

MULTIPLEX DECODER

For receiving STEREO FM

Now is your chance to benefit in full from the new B.B.C. stereo transmissions with our Multiplex Decoder. Design features: Highly efficient Mullard vinkor pot cores. Two semi-conductor diodes. Double purpose valve. Printed circuit type construction, high input impedance. Specification: Cross talk minus 26 dB at 1 kc/s. Input requirements 0.5-1.5 RMS. Stability plus or minus 0.1%. Voltage requirements H.T. 190-250 volts. D.C. at 5 mA heaters 6.3 volts. A.C. at 300 mA. Self powered unit shortly available, price to be announced. Size 5½in. x 3½in. x 1in. Fully built and tested.

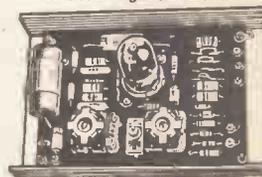

Price £4.4.0 P. & P. 3/-

FIRST QUALITY PVC TAPE



5½in. Std.	850ft.	9/-	5in. L.P.	850ft.	10/6
7in. Std.	1,200ft.	11/6	3in. T.P.	600ft.	10/6
3in. L.P.	240ft.	4/-	5in. T.P.	1,800ft.	25/6
5½in. L.P.	1,200ft.	11/6	5½in. T.P.	2,400ft.	32/6
5½in. D.P.	1,800ft.	18/6	7in. T.P.	3,600ft.	42/6
7in. L.P.	1,800ft.	18/6	4in. T.P.	900ft.	15/-

POST & PKG. ON EACH 1/6.
4 OR MORE POST FREE.

NEW Transistorised SIGNAL GENERATOR

Size 5½in. x 3½in. x 1½in. For I.F. and R.F. alignment and A.F. output. 700 c/s. frequency coverage 460 kc/s to 2 Mc/s in switched frequencies. Ideal for alignment to our Elegant Seven and Musette. Built and tested. P. & P. 3/6.



39/6

EXTRACTOR FAN



A.C. mains 230/250 v., complete with pull switch. Size 6x6x4in. Price 27/6, plus 5/- P. & P.

POWER SUPPLY KIT

A.C. Mains 200/250 v.

Incorporating "C" core type mains transformer, full wave metal rectification and smoothing condenser. Smooth output 250 v., 250 mA and 6.3 v. 4 amp, for Heaters.



25/- P. & P. 9/6.

Type E MOTOR




Small A.C. mains motor 230/250 volts complete with gear-15/- P. & P. box. 6 r.p.m. Similar to above motor but without gearbox. 9/6. P. & P. 3/-.

SILICON RECTIFIERS

250 v. P.I.V. 750 milliamps. Six for 7/6. Post paid.

TRANSISTORISED 1½ WATT AMPLIFIER

comprising 2AC, 12B, 20C, 75 and 2 AA129 separate bass and treble volume controls. Complete with Power Supply A.C. mains, 240 v. Size 7½x3½x2in. Price 50/-, plus 2/6 P. & P.



3 TO 4 WATT AMPLIFIER

3-4 watt Amplifier built and tested. Chassis size 7 x 3½ x 1in. Separate bass, treble and volume control. Double wound mains transformer, metal rectifier and output transformer for 3 ohms speaker. Valves EC88B and 6V6. £2/5/-, plus 5/6 P. & P. The above in Kit Form, £1/14/6, plus 5/6 P. & P.



CYLDON U.H.F. TUNER

Complete with PC88 and PC86 valves. Full variable tuning. New and unused. Size 4½ x 5½ x 1½in. Complete with circuit diagrams. 35/- Plus 3/6 P. & P.



Concealed Lighting YOU can fit!

40 watt Fluorescent Light Kit incorporating G.E.C. or Thorn 2ft. 40 watt Tube, G.E.C. Choke, 2 Bi-pin holders, starter and starter holder. Normal price of the above component parts would be £3 approx.

NORMAL PRICE £3.
Our Special Price 15/- complete. For personal shoppers only. This item will not be posted.



GEC DOORBELL

Complete with mains transformer, 240 v. A.C., and illuminated bell push. Price 12/6, plus 5/6 P. & P.



OUR NEW BRANCH AT

323 EDGWARE ROAD, LONDON, W.2.

IS NOW OPEN—PERSONAL SHOPPERS ONLY.

All orders by post must be sent to our Acton address. Early closing Thursday


RADIO AND T.V. COMPONENTS (ACTON) LTD

21A HIGH STREET, ACTON, LONDON, W.3.

SHOP HOURS 9 a.m. to 6 p.m. EARLY CLOSING WEDNESDAY.

Goods not despatched outside U.K. All enquiries stamped addressed envelope. Terms C.W.O.

BSR Tape Deck

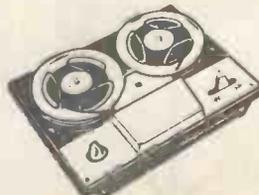

A.C. 200/250 v., tape speed 3½ twin track.

Special price

£5.19.6

Post and packing 7/6.

ZENITH SLIDING RESISTORS
Worm drive type 7.5 ohms 4 amp. Length 10ins. Price 30/-. P.P. 2/6.

BURCO POWER RHEOSTATS
7.5 ohms at 5.48 amps, 3 ohms at 8.66 amps. Price 42/6. P.P. 2/6.

FATIGUE METERS MK. 1B
This extremely light self-contained instrument measures and records g forces from an accelerometer in the ranges of 0.05 to 1.95g on the six high speed counters, all counters are clearly marked with the relative g forces enabling a permanent record to be kept. The only power required is 12 or 24 v. D.C. for relay operation. Size 6X6X4in., weight 4lb. Price £9/19/6.

ZENITH AUTO. VOLTAGE REGULATOR
Input 210-260 vac. Output constant 230 vac plus or minus 1% at 32.6 amps., small size modern equipment, for a small outlay will protect your vital equipment against voltage fluctuations. Price, in as new condition, £65. Carriage 30/-.

COLVERN HELIPOTS (Ten Turn)
Type CLR 26/1001/13. 25K ohms
" CLR 26/1001/14. 10k ohms
" CLR 26/1001/14. 100k ohms
Price 30/- each. Brand new stock.

SPECIAL OFFER—RHEOSTATS
3000 ohms. 75 watt C/W instrument knob, brand new stocks, 15/-. P.P. 2/-. Also 50 ohms 1.5 amps., 12/6. P.P. 2/-.
TELEPRINTER, CARRIER FREQUENCY SHIFT ADAPTOR
By Redfion, in new condition, comprising P.S.K. and power supply unit in two separate transit cases; the P.S.U. has built-in 80-0-80v. P.S.U. which enables the unit to work directly into Creed 7B or other types of teleprinter, for operation with most types of Service Receivers. 1F frequency adjustable 440-475 kc/s. sold complete with all plugs, cables, etc. Power supplies 240 v.a.c. or 24 v.d.c. Price £10/10/-. carriage 25/-.

POWER UNIT TYPE 234A
A source of power to operate your 1392 R/X or any equipment that requires a fully smoothed output of 250 v. d.c. + 0.3 v. at 6 amps., for bench or 19in. rack mounting, fully fused tapped input 200 to 250 v.a.c., brand new cased units at only 55/-. P.P. 2/6.

AN/APR4 VHF COMMUNICATIONS AND SEARCH RECEIVERS



For the first time offered in new boxed condition. Frequency Range 38-1,000 Mc/s. Accuracy 1%. Five I.F. stages. Output impedance 600 or 4,000 ohms. Power supply 115 v. A.C. (internal). Price complete with three tuning units. NEW £90.

AVOMETER MODEL 7
New Ministry Release, in as new condition, Fully guaranteed. Price £12/10/-. P.P. 7/6.

MARCONI POWER OUTPUT METERS TYPE TF340
Measures 5 mW-5 watts F.S.D. A small portable instrument in excellent condition. Only £12/10/-. P.P. 7/6.

COSSOR SPLIT BEAM OSCILLOGRAPH Model 1049 Mk. 4. Time base eighteen ranges from 150 us to 7.5 sec. Frequency response DC to 200kc/s. at 30% down. In as new condition, not to be confused with the older models. Price £45, also Model 1035 Mk. 4.

L.T. TRANSFORMERS
5 v. C.T. three times, at 5 amps., 230 v. primary. These U.S.A. transformers are excellent for charging purposes. New boxed, 22/6. Carr. 3/6.
12 v. 7 v., 1 1/2 v. at 1.5 A. Fully shrouded, tapped primary 240 A.C. small size, 12/6 each. P.P. 2/3.

P. F. RALFE
423, GREEN LANES, HARRINGAY, LONDON, N.4. MOUNTVIEW 6939

Tinsley Vernier Potentiometer Type 4363F Auto. Measurement Range 1. From Minus 0.00001 volts to plus 1.801 00 volts in steps of 0.000 01 volts. Range 2. From minus 0.000 001 volts to plus 0.180 10 volts in steps of 0.000 001 volts. Main Dial 1.7 in 17 steps of 0.1 volts. Vernier Dial 0.1 volts in 100 steps of 0.001 volts. As new, Price £95. C/W Standard Cell.

AUDIO OSCILLATORS
B.S.R. L.O. 50A with LF & HF Dials Range 20 c/s.-20Kc/s. O.P. Meter etc. price £15. Calibration and condition excellent.
B.S.R. L.O. 800B Range 20 c/s to 25Kc/s. with H.F. & L.F. dials., and high gain amplifier, Muirhead attenuator O.P. meter. Price £45.
Marconi Type TF195L. Range 10c/s.-20Kc/s. with O.P. meter, etc. Price £15.
Muirhead type D-330-B. Range 10c/s-200Kc/s. in three ranges output 10 MW-1 watt into 600 ohms, with attenuator O.P. meter. Price £30.

CAPACITANCE BRIDGE ELECTROLYTIC B.P.L. Cat. No. ZD00506. Measures capacitance under full working loads (variable voltage selection), easy to operate, C/W voltmeter, leakage current meter, balance indicator, discharge switch, etc. Range 2 mfd. to 2,200 mfd. A modern instrument in new condition, and guaranteed accurate. Price £35, P.P. 20/-.

MARCONI CR15/2 COMMUNICATIONS RECEIVER
Range 2Mc/s to 60Mc/s C/W mains P.S.U. and case in very good condition. Price £45.

MINIATURE LEDEX ROTARY SWITCHES
5 bank single pole 11 way for 24 v. operation. Brand new stock. Price only 30/-. P.P. 2/6.

MUIRHEAD REFERENCE CELLS
Type D-845-C. "U" shaped type. Brand new in individual cartons. Price 25/-. P.P. 1/6.

MINIATURE RELAY BANKS
Six miniature relays 9-12 v., 1 make per relay, contained in neat aluminium case 6x4x1 1/2in., with six ball inch spaced crystal holders, designed to switch any desired crystal by remote control. Relays and crystal holders can be easily removed for other uses if required, terrific value only 15/6. P.P. 1/6.

THE PEMBRIDGE COLLEGE OF ELECTRONICS FOR TRAINING IN RADIO AND TELEVISION

FULL-TIME COLLEGE COURSE IN RADIO AND TELEVISION

Our Course, of sixteen months' duration, provides a fundamental training for radio and television engineers. It includes theoretical and practical instruction on transistor television receivers, U.H.F. television receivers and colour television.

Exactly half the time is spent on practical work and the course provides excellent practical experience on valve and transistor radio receivers and high-fidelity equipment and all well known makes of television receivers.

The Course is recognised by the Radio Trades Examination Board (R.T.E.B.) for the Radio and Television Servicing Certificate examinations.

Next Course commences 4th April, 1967.

To: **The Pembridge College of Electronics (Dept. P10)**
34a Hereford Road, London, W.2.
Please send, without obligation, details of the Full-time Course in Radio and Television.

Name

Address

Amplification

SUPER P.A. SYSTEM



Comprising tuner/amplifier, horn speakers, matching microphone and floor or table stand.

R.A. 30 TUNER AMPLIFIER. 40 watts output. Fully tunable over Medium wave (535-1005 kc/s.). High class amplifier section with twin mike inputs, 50 K/ohms. Gram, tape and mike mixer. Separate volume control for each input. 10 valves and 1 diode. Tuning meter and output meter. Size 18 x 10 1/2 x 7 in. high. 42 gns.

TU.95 REFLEX HORN SPEAKERS. Strong and durable, weatherproof, waterproof and shockproof. 20 in. dia. 25 watts output. 15 ohms impedance. Freq. response 100-10,000 c.p.s. Gives excellent reproduction of speech and music. 22 gns. PAIR (or £11/19/6 each). (TU.35, 35 watt model, 20/- extra.)

MATCHING DYNAMIC MICROPHONE. Suitable for desk, hand or stand. High imp. 50 K/ohm. 6 gns.

TELESCOPIC MICROPHONE STAND. Chrome plated. Choice of floor or table model. 3 gns.

MIGHTY MIDGET 12v. PORTABLE —MOBILE P.A. SYSTEM




Comprising 12 v. amplifier with matching dynamic microphone and horn speakers.

YA.110 TRANSISTOR AMPLIFIER 12 v. D.C. operation. 16 watts output. 8 or 16 ohm output impedance. High and Low impedance inputs for mike, radio and tape recorder. Volume control. Size only 1 1/2 x 3 1/2 x 5 1/2 in. Can be mounted on any car or boat by means of clamp supplied regardless of its type of grounding. Low current consumption. Complete with matching dynamic microphone fitted jack plug, spare jack plug and mounting brackets. Price 12 gns.

Y8-5 REFLEX HORN SPEAKERS. 5 in dia. 8 ohms impedance. 5 watts output. Frequency response 450-6,500 c.p.s. Waterproof, shockproof, lightweight. Attractive dark blue finish. 3 gns. each.

SUPER POWER LOUDHAILER

Hearing range 1,000 ft. Light weight, self-contained, portable dynamic directional type microphone with cardoid polar diaphragm. Fully transistorised power amplifier. Long battery life. Ideal for all outdoor events. Brand New and Guaranteed. 12 gns. Junior Model £4/15/-. P. & P. 2/6.



All the above units are brand new and guaranteed. Can be purchased as complete systems or all are available separately.

COMMUNICATION

COMPACT COMMUNICATIONS RECEIVER CR.150

The latest design. Covers 4 wavebands with a continuous frequency range of 540 kc/s. to 30 Mc/s. Will receive all broadcast bands plus amateur and world-wide short wave. Exceptionally sensitive tuning circuit. Extra large easy to read dial with Bandspread tuning. "S" meter for fine tuning. Built-in speaker and telescopic aerial. BFO for morse code listening. ANL for clear reception. Phone output socket. Stand by switch, etc. Attractively housed in metal case. A.C. 200/250 volt Brand New, Guaranteed. Gee's Price 16 gns. P. & P. 10/-.



LAFAYETTE DELUXE COMMUNICATIONS RECEIVER




MODEL HA-225. 5 Bands. 150-400 kc/s., 1.6-4.8 Mc/s., 4.8-14.5 Mc/s., 10.5-30 Mc/s., 48-54 Mc/s. 14 valves. Superheterodyne circuit. Extra RF stage, Mixer/Osc. for Dual Conversion on 6 metres, 1 RF Plus 2 IF Stages for High Gain Reception on all other Bands. New Product

Detector Circuits, Crystal Calibrator, Improved Automatic Noise Limiter. Gee's Special Price 43 gns.

TRIO DELUXE COMMUNICATION RECEIVER MODEL 9R-59.

4 Bands. 550-1,600 kc/s. 1.6-4.3 Mc/s., 4.8-14.5 Mc/s., 10.5-30 Mc/s. 8 valve Superhet circuit. 1 RF plus 2 IF Stages for High Gain Reception. Easy to read illuminated slide rule dial. Built-in Q Multiplier. Aerial trimmer for optimum performance on all Bands. Calibrated Electrical Bandspread on Amateur Bands. 80 through 10 Metres, 0-100 Logging scale for S.W.L.'s. Effective automatic Noise Limiter. AVC-MVC Selector on front panel. Stable Oscillator and BFO for clear AM, CW and SSB reception. Built-in edgewise S-meter. Price 30 gns. Carr. 10/-.

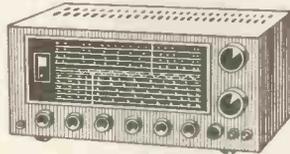

LAFAYETTE AIRCRAFT RECEIVER



LATEST IMPROVED MODEL HA-55A. Covers 108-136 Mc/s. Listen to Aircraft Communications with this deluxe receiver. Two RF stages with 6CW4 Nuvistor for high sensitivity. 11 valve performance. Transistorised power supply. Built-in 4 in. speaker. Adjustable squelch. Brand New and Guaranteed. Size

11 1/2 in. x 5 1/2 in. x 7 1/2 in. £19/7/6. Carr. 10/6.


WALKIE TALKIES

PONY SUPER 9 TRANSISTOR Complete 2-way communication for Business, Home, Farms, Boating, etc. Brilliant design, beautifully finished. Built-in speaker/microphone. 10 section telescopic aerial. Battery strength indicator. Size 5 1/2 x 1 1/2 x 2 1/2 in. Complete with batteries, earphones, wrist straps. 26 gns. value for only 16 gns. pair.



LAFAYETTE GT 50, 13 Transistor. 2 channel model featuring separate speaker and microphone. 500 mW. output. Variable squelch control, etc. Complete with all accessories. 30 gns. pair.

PORTABLE TRANSISTORISED "WIRELESS" INTERCOM MODEL LP.701.



Special features include on/off/volume control, push to talk lock switch, call buzzer and pilot light. An amazingly new space age Intercom system needing no connecting wires between units. Simply plug into A.C. power point and talk, communication being carried through A.C. power lines. Units can be moved from one location to another without trouble. Complete with operating instructions. Ideal for office, home, factories, stores, etc. 12 gns. pair.

GEE BROS RADIO

15 LITTLE NEWPORT STREET, LONDON, W.C.2. TEL: GER 6794/1453
 Adjoining Leicester Square Tube Station.
 Open 9-6 Monday - Friday, 9-1 Saturday.

Test Equipment



NEW MODEL U-50D MULTI-TESTER. 20,000 O.P.V. MIRROR SCALING WITH OVERLOAD PROTECTION. Ranges: D.C. volts: 100 mV., 0.5 v., 5 v., 250 v., 1,000v. A.C. volts: 2.5 v., 10 v., 50 v., 250 v., 1,000 v. D.C. current: 5 µA, 0.5 mA, 5 mA, 50 mA, 250 mA. Size: 5 1/2 x 3 1/2 x 1 1/2 in. Complete with batteries and test prods, £5/15/-.

NEW TRANSISTORISED INSULATION - RESISTANCE TESTER Model PDM. 500.

Push button operation. Large easy to read scale dial. Handy vinyl-leather carrying case. Rated voltage and resistance 500 v./100 megohm. Scale range: 0.1-100-200 megohm. Size 6 1/2 x 4 1/2 x 2 1/2 in. Price £18/18/-.



EVERSHED & VIGNOLES MEGGER 2,500 v. (hand-driven generator). Absolutely Brand New, complete with leather carrying case. £85. Carr. 20/-.


ERSKINE TYPE 13A DOUBLE BEAM OSCILLOSCOPES. Perfect working order, 110/230 v. A.C. Time base 2 c/s. 750 kc/s. Calibrators at 100 kc/s. and 1 Mc/s. Separate Y1 and Y2 amplifiers up to 5.5 Mc/s. Available complete with probe, leads, cover, circuit diagram, etc. As new 21 gns. Carr. 30/-.



TYPE 50B VARIAC. Input 250 v. Output 0-270 v. Maximum current 31 amp. Rated current 20 amp. Guaranteed. £25. Carr. 30/-.

AUTOMATIC WIRE STRIPPER Model STR 23


Simple to use. Strips any size wire. A must for every workshop.



35/-
P. & P. 2/6.

STEREO HI-FI HEADSET Model ST.3R.

Provides perfect stereo and mono reproduction. Freq. response 25-17,000 c.p.s. 8 ohms per channel. Feather soft ear cushions and headband, fitted 8ft. lead with stereo jack plug and remote control box with volume controls, etc. 92/6. P. & P. 2/6.



G.P.O. STANDARD 19in. Heavy Duty EQUIPMENT RACKS.

Channel uprights, heavy duty base. 4ft. 10in. £4/10/-. 6ft., £7. Carr. 20/- each.

HEAVY DUTY TRIPOD STAND.

Ideal for P.A. speakers, etc. Chrome plated, adjustable to 7ft. high. 5 gns. Carr. 12/6.



Z & I AERO SERVICES LTD

PEN RECORDERS



Elliot portable recording milliammeters.
 As D.C. recorder: 1 mA. PSD. Movement resistance 1200Ω.
 As A.C. current or voltage recorder: Movement resistance at 50 cps. 1800Ω. Sensitivity 1 mA. A.C. PSD.
 As decibel meter: source impedance 600Ω. Range +5 to -10 dB. Frequency response 50 cps to 10 kcs.
 Chart drive: 230 v. A.C. at 1in. and 6in. per hour. Movement is fitted with "high" and "low" alarm contacts which can be set for any value of the current.
 Strip chart 3 1/2in. wide. Curvilinear trace. PRICE £40
 Packing and carriage 15/-.

RECORD PORTABLE RECORDING MILLIAMMETERS

These are similar to the above but are somewhat smaller and lighter, and D.C. resistance of the movement is 400Ω. Other details as above. PRICE £42 10 0
 Packing and carriage 15/-.

MULTIMETERS

TYPE 108-1T

24-range precision portable meter: 5,000 o.p.v. D.C. Volts 2.5-10-50-250; 500-2500 V. A.C. Volts: 10-50-100-250; 500-2500 V. D.C. current 0.5-5-50-500 mA. Resistance: 2,000-20,000 ohms-2-20 megohms. Power output calibration for 600 ohms line. £5/5/-.
 P.P. 7/6. Dimensions: 7 1/2in. x 6in. x 3 1/2in. Weight 3 1/2lb.



TYPE MF15



A.C. and D.C. voltage ranges: 0-10-50-250-500-1000V.
 D.C. current ranges: 500μA-10-100mA.
 Resistance ranges: 100MΩ-1MΩ
 The meter is also calibrated for Inductance (10-100H), capacity (0.6μF) and output level measurements. Sensitivity 2000Ω V. Accuracy ±2.5% for D.C. and ±4% for A.C. measurements.

Dimensions: 5 1/2 x 3 1/2 x 1 1/2in. Price £3/3/-.

GERMANIUM POINT CONTACT DIODES

1N34A	4/-	CG62H	1/6	OA70	2/-
1N38A	4/-	GEX23	1/6	OA79	2/3
1N69	4/6	GEX44	1/6	OA81	2/-
1N72	4/-	GEX54	2/-	OA86	3/6
1N81	4/-	EG5008	2/-	OA90	2/-
OG1E	2/-	OA3	4/6	OA91	2/3
OG10E	1/6	OA6	4/-	OA95	3/-
OG12E	2/-	OA7	4/-	8917G	2/-
OG61H	3/-	OA47	4/6		

MICROWAVE DIODES

1N21 3,000 mc/s.	4/-	CS10RR 12,000 mc/s.	70/-
1N21B 3,000 mc/s.	6/-	CV101 6,000 mc/s.	5/-
1N23 9,375 mc/s.	4/-	CV102 6,000 mc/s.	5/-
1N23CR 9,375 mc/s.	20/-	CV103	3/-
1N25 1,000 mc/s.	15/-	CV111 12,000 mc/s.	8/-
1N28 3,000 mc/s.	20/-	CV112 12,000 mc/s.	8/-
OS2A 6,000 mc/s.	5/-	CV291 6,000 mc/s.	12/-
CS3A 10,000 mc/s.	12/6	CV2250 12,000 mc/s.	30/-
CS3B 12,000 mc/s.	14/-	CV2258 12,000 mc/s.	40/-
CS4B 12,000 mc/s.	35/-	CV2255 12,000 mc/s.	100/-
CS9B 12,000 mc/s.	30/-	SIM2 12,000 mc/s.	37/6
CS10 B 9,375 mc/s.	70/-	SIM5 12,000 mc/s.	37/6
		VX3136 34,860 mc/s.	65/-

FERRANTI TRANSISTORS	ZT91	50/-
ZT65	ZT105	54/-
ZT83	ZT1484	75/-



VALVES FOR EXPORT

- ★ Large scale purchases and expansion of our activities enable us to introduce further cuts in our export prices. This, in conjunction with strict quality control makes our goods most competitive, and our service most efficient.
- ★ Our extensive stocks (over 800,000 valves, tubes and semi-conductors), spread over 2,500 types, include comprehensive range of entertainment and industrial types. Our inspection facilities, approved by the British Air Registration Board, enable us to ensure consistent quality of goods, and to issue test certificates to E.V.S. and M.I.L. standard.
- ★ We make sure, by selective buying and constant tests and inspection, that only first grade goods, complying with most strict specifications, are supplied.
- ★ Among our customers are: H.M. Government Departments, Foreign Governments, Post Office Departments, Air Lines, Universities, Research Laboratories, Electronic equipment manufacturers at home and abroad, etc.

BELOW ARE A FEW EXAMPLES OF OUR EXPORT PRICES*. FULL EXPORT PRICE LIST AVAILABLE ON REQUEST.

*For direct export in lots of 100 per type, bulk packed.

OA2WA	8/-	6AN8	4/-	50C5	2/6	ECC88	4/-	PCC84	2/9	UBF80	3/8
OC3	4/-	6AS6	4/6	328A	25/-	ECF80	2/10	PCC89	5/2	UCL82	3/6
OD3	4/-	6AS7G	11/-	807	5/6	ECH81	2/4	PCC189	4/8	UCL83	4/8
1B3GT	3/2	6B4G	12/-	829B	45/-	ECL80	3/-	PCF80	2/7	UF80	4/-
1X2B	2/9	6BA6	1/10	B37	12/-	ECL82	2/8	PCF82	2/7	UY41	3/-
2C40	50/-	6BE6	1/10	884	7/6	ECL85	3/6	PCL82	3/-	UY85	2/2
2C51	8/-	6BG6G	7/-	2050	7/6	ECL86	3/10	PCL84	3/6		
2D21	3/6	6C5GT	4/-	5551A	240/-	EF86	2/9	PCL85	3/7	METAL VALVES	
3BP1	40/-	6CY5	4/-	5654	6/9	EF183	2/6	PCL86	3/6	6J7	4/6
3E29	45/-	6J4	5/3	5672	5/-	EF184	2/9	PL36	4/6	6K7	3/6
5R4GY	4/6	6J5GT	3/-	5751	7/6	EL84	2/-	PL83	3/-	6Q7	3/6
5U4G	2/9	6J6	2/-	6360	14/-	ELL80	6/3	PL84	3/-	6SA7	3/6
5V4G	4/6	6L6GC	4/-	6939	28/-	EM34	5/6	PY32	5/-	6SG7	3/6
5Y3GT	2/8	6SL7GT	3/3	9003	7/-	EY51	3/2	PY81	2/5	6S17	4/-
5Z4G	3/6	6SN7GT	2/9	DY86	2/9	EY86	2/8	PY800	3/-	6SK7	3/6
6AG5	2/-	6V6GT	2/9	E80CF	13/-	KT66	11/6	PY801	3/-	6SQ7	3/6
6AK5	3/-	6X5GT	2/6	ECC85	2/3	PC97	4/-	QV03-10	14/-	6SR7	3/6
6AL5	1/6	35W4	1/10							12SQ7	5/-

In addition to currently manufactured valves we keep large stocks of obsolete and obsolescent types for immediate delivery. However old is your equipment, we may still be able to help you to keep it going.

We still require active agents in various territories. Please apply, giving details to:
 Z & I EXPORT & WHOLESALE LTD., 44a, WESTBOURNE GROVE, LONDON, W.2.

Head Office:

44a WESTBOURNE GROVE, LONDON, W.2.

Tel: PARK 5641/2/3

Cables: ZAERO LONDON

Retail branch (personal callers only)

85 TOTTENHAM COURT RD.,

LONDON W.2. Tel: LANgham 8403

A R.B. Approved for inspection and release of electronic valves, tubes, klystrons, etc.

Please send all enquiries, correspondence and Mail orders to Head Office



TRANSISTORS

Table of transistor specifications including part numbers (e.g., OC16, OC23, OC24), types (e.g., 25-, 15-, 17/6), and descriptions.

AC176 is complementary to AC128; 2N1132 is complementary to 2N697

Our new catalogue of valves, tubes and semiconductors is now ready. Apart from listing prices of several thousand types we keep in stock it is a work of reference providing short specifications of semiconductors and special tubes. Please send foolscap S.A.E. (6d. stamp please).

THYRISTORS

400 p.i.v. at 5 amps max. (at 50°C). Gate voltage 3.25 v. at 120mA. 17/6 ea.

ZENER DIODES

Table of zener diode specifications including part numbers (e.g., BZ111, BZ113, BZ120) and types (e.g., 6/6, 7/6, 10/6).

MISCELLANEOUS SILICON HALF-WAVE POWER RECTIFIERS

Table of silicon half-wave power rectifier specifications including part numbers (e.g., 18001, 18004, 18113) and types (e.g., 200 p.i.v., 400 p.i.v.).

CATHODE RAY TUBES

Table of cathode ray tube specifications including part numbers (e.g., 3BP1, 3FP7, 3GP1) and types (e.g., 55-, 60-, 65-).

THE SECTION BELOW GIVES PRICES OF MOST COMMON RECEIVING AND TRANSMITTING VALVES. PLEASE CONSULT OUR CATALOGUE FOR FULL RANGE

Large table of vacuum tube specifications including part numbers (e.g., OA2, OA3, OA8), types (e.g., 6A6G, 6AG5, 6BE6), and prices.

WHEN ORDERING BY POST PLEASE ADD 2/6 IN £ FOR HANDLING AND POSTAGE. MINIMUM CHARGE 2/-

Pitman Books

Antenna Theory and Design

Volumes 1 and 2

H. Paul Williams

The two volumes of this book constitute a most comprehensive treatise on the theory and practice of aerial design. Volume I gives the entire theory underlying the various methods of calculating antenna characteristics. Volume 2 deals in depth with practice and the problems of aerial design. Volume two has recently been revised into a new second edition.

Vol. 1 21s net Vol. 2 105s net
by post 130s 6d

Radio Communication

J. H. Reyner and P. J. Reyner
Second edition

Covering the City and Guilds Telecommunications Technicians' Course in Radio Subjects and suitable for the more advanced student to degree level, this work has been heavily revised and much new material added. The principal changes are concerned with transistors, their application and components, and a chapter on the basic principles of semiconductors has been completely rewritten and increased in content.

60s net by post 62s 9d

from all booksellers or by post from:

NEW ERA BOOKS LTD
14 NEWTON ST., WC2

Thanks to a bulk purchase we can offer

BRAND NEW P.V.C. POLYESTER & MYLAR RECORDING TAPES

Manufactured by the world-famous reputable British tape firm, our tapes are boxed in polythene and have fitted leaders, etc. They quality is as good as any other on the market, in no way are the tapes faulty and are not to be confused with imported, used or sub-standard tapes. 24-hour despatch service.

Should goods not meet with full approval, purchase price and postage will be refunded.

S.P.	3in. 150ft.	2/-	5in. 600ft.	6/-
	5½in. 900ft.	7/6	7in. 1,200ft.	9/-
L.P.	3in. 220ft.	2/3	5in. 900ft.	8/-
	5½in. 1,200ft.	10/-	7in. 1,800ft.	13/-
D.P.	3in. 400ft.	4/6	5in. 1,200ft.	12/-
	5½in. 1,800ft.	16/-	7in. 2,400ft.	20/-

Postage on all orders 1/6

We can also offer, BRAND NEW PRE-RECORDER LANGUAGES COURSES IN GERMAN, FRENCH, SPANISH AND ITALIAN.

Each course consists of 26 step-by-step lessons recorded at 3½ i.p.s. suitable for two- and four-track machines and supplied complete with handbook. Normal retail price 59/6.

Our price 19/6 per course.

STARMAN TAPES

28 LINKSDRIFT AVENUE, ASHFORD, MIDDX.
ASH 53020

HI-FI MAIL ORDER SPECIALISTS

GOODS DESPATCHED BY RETURN
CARRIAGE & INSURANCE FREE! (UK)

A selection from our extensive stock

			U.S.
SPEAKERS			
Wharfedale Super 8. RS/DD	£7 2 0		\$18.80
Wharfedale Super 10. RS/DD	£11 16 8		\$28.00
Goodmans Axiette 8	£6 3 6		\$14.70
Goodmans Maxim Mini System	£17 15 7		\$42.15
Goodmans Maxam K System	£36 15 0		\$101.35
Quad Electrostatic Speaker	£57 0 0		\$158.75
Tannoy 12in. Monitor DC Speaker	£30 15 0		\$86.10
Kelly Ribbon H.F. Mk. II	£11 10 0		\$31.50
Lowther PM6 Drive Unit	£18 18 0		\$52.50
MOTORS			
Thorens TD150 AB. motor/arm/plinth	£35 17 4		\$82.60
Garrard 401 Transcription Unit	£28 17 5		\$71.30
Thorens TD124 Transcription Unit	£40 18 0		\$94.95
Connoisseur Classic, 2-speed unit	£14 14 1		\$35.00
Garrard SP26, motor and p/up arm	£13 15 0		\$32.50
AMPLIFIERS			
Leak Stereo 30 Transistor Amplifier	£49 10 0		\$138.50
Leak Stereo 20 Variislope 2 Pre-amp.	£57 10 0		\$161.65
Quad 22 and 2 Quad II Power amps.	£75 0 0		\$209.25
Armstrong 222 Stereo Integrated Amp.	£28 15 0		\$80.50
Rogers Cadet III, stereo amp. and control	£31 0 0		\$86.55
Goodmans Maxam Stereo Amplifier	£49 10 0		\$135.50
Radiolord SC22/STA15 Stereo Units	£84 0 0		\$235.20
TUNERS (Stereo Decoders extra)			
Armstrong 223 AM/FM Tuner	£31 0 0		\$74.20
Quad AM II or FM Tuner, each	£28 19 0		\$86.70
Leak Troughline III FM Tuner	£32 3 11		\$74.90
PICK-UPS AND CARTRIDGES			
Decca Deram Transcription Cartridge	£4 14 6		\$11.45
Ortofon S15TE Cartridge with trans.	£32 7 1		\$77.00
S.M.E. 3012/Series II Arm	£28 16 10		\$88.30

WORLD WIDE EXPORTERS


OVERSEAS ORDERS SENT FREE OF PURCHASE TAX
AND SHIPPED PROMPTLY AT MINIMUM COST

Fully illustrated catalogue 4/6. U.K. (Export 7/- or \$1.00.)
Refundable against first purchase value £7 or \$20.00.

C. C. GOODWIN (SALES) LTD.
(Dept. W83) 7 The Broadway,
Wood Green, London, N.22
Telephone: Bowes Park 0077/8
1 minute from Wood Green Underground.
Open 9-6 Monday to Saturday (Thursday 9-1 p.m.)


1/2 PRICE SPECIAL RADIO CHASSIS OFFERS

HI-FI CONTINENTAL
STEREOPHONIC RADIOGRAM CHASSIS

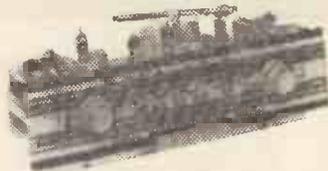


Magnificent "Continental" stereophonic Radiogram chassis with piano key switches, built-in ferrite rod aerial. Comes complete with two 10in. elliptical loudspeakers, plus a mono/stereo 4-speed automatic record changer. Complete £29/19/6 (Units available separately if required. Chassis only 21 gns.) Special terms available of £10/6/- deposit followed by 18 monthly payments of £1/7/3 (total H.P. of £34/17/-) plus 15/- P.P. Send £11/1/6 now.

IMPERIAL HI-FI STEREOPHONIC RADIOGRAM CHASSIS

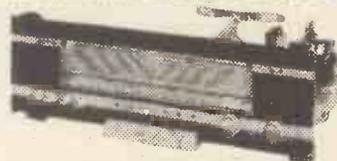

The Imperial stereophonic 4-waveband chassis has the most advanced specifications yet offered in this country. There is a built-in ferrite rod aerial, seven piano key buttons, controlling mono/stereo selection, Gram Long-Medium-Short-FM-ON/OFF. The unit comes complete with two 10in. elliptical loudspeakers plus a mono/stereo 4 speed automatic record changer. Complete £41/9/6. Chassis only 29½ Gns. Special terms available of £13/16/6 deposit followed by 24 monthly payments of £1/8/10 (total H.P. £48/8/6) plus 17/6 P.P. Send £14/14/0 now.

EMPRESS HI-FI AM/FM STEREOPHONIC CHASSIS

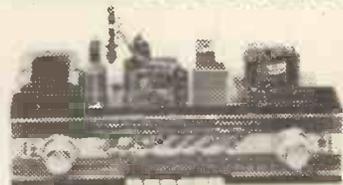

This most advanced Radiogram chassis with automatic push button selection covers short, medium and long wavebands plus V.H.F./F.M. Offered complete with 2 10x6 speakers. 4 speed Stereo/Mono autochanger, only £35/19/6. Chassis only 25½ gns. Special terms available of £12 deposit followed by 18 monthly payments of £1/11/7 (total H.P. £40/8/6) plus 15/- P. & P. Send £12/15/0 now.

All Lewis Radio equipment including valves is fully guaranteed for one year, free of charge. Send your cheque or P.O. today while stocks last to Dept. W.37.

LEWIS radio

LEWIS RADIO, 100, CHASE SIDE, SOUTHGATE
LONDON, N.14. Telephone: PAL 3733/9666

WW-142 FOR FURTHER DETAILS

CLASSIFIED ADVERTISEMENTS

DISPLAYED SITUATIONS VACANT AND WANTED: £5 5s per single col. inch.
LINE advertisements (run-on): 6/- per line (approx. 7 words), minimum two lines.
 Where an advertisement includes a box number (count as 2 words) there is an additional charge of 1/-.
SERIES DISCOUNT: 15% is allowed on orders for twelve monthly insertions provided a contract is placed in advance.
BOX NUMBERS: Replies should be addressed to the Box number in the advertisement, c/o Wireless World, Dorset House, Stamford Street, London, S.E.1.
 No responsibility accepted for errors.

Advertisements accepted up to MARCH 9 for the APRIL issue, subject to space being available.

SITUATIONS VACANT

AN OVERSEAS CAREER with International Aeradio Limited.
 TO meet the requirements of constant growth and expansion, we invite applications from technicians and engineers for an overseas career in North, West and East Africa, the Mediterranean area and the Arabian Gulf. If you have recently completed service in a trade such as Ground Wireless Fitter in the R.A.F., Radio Electrical Artificers in the Royal Navy or R.E.M.E., Army, or have other experience in the maintenance of H.F. and V.H.F. communications, R.T.T. and navigational aids, we should be interested to hear from you. Successful candidates would normally spend six weeks at our Radio Engineering School, Southall, Middlesex, before proceeding overseas, but in some cases staff with suitable qualifications and experience may be offered immediate posting. Overseas staff receive a tax-free salary with married and child allowances if appropriate and accommodation, bachelor or married is provided free; other benefits include generous U.K. leave and membership of an excellent pension and life assurance scheme.

WRITTEN applications, please, to Personnel Manager, International Aeradio Limited, Aeradio House, Hayes Rd., Southall, Middlesex. [1156]

PYE CAMBRIDGE WORKS, Ltd., Haig Rd., Cambridge.
 * SINGLE sideband equipment.
 * V.H.F. radiotelephone equipment.
 * HI-FI reproduction equipment.

WE require trained personnel for production testing and fault finding of modern equipment.

WE have limited vacancies for more senior and experienced men with drive, who can lead small teams engaged on this work.

WE have also limited vacancies for persons of less experience who can be trained for such work. [131]

APPLY to the Personnel Manager:
RADIO Development Engineers required, £1,200-£1,750 p.a., apply to—Norfirm Employment Agency, Ltd., 19a, Manchester St., Luton (21330). [1685]

DUE to continued expansion N.C.R. require additional Electronic and Electro-Mechanical Engineers, for Computer Maintenance. Posts are available for men wishing to become Site Engineers.

TRAINING Courses are arranged for suitably qualified men. H.N.C. Electronics City & Guilds Final or equivalent standard welcome. Knowledge of electronic or electro-mechanical equipment necessary. Good Pension and Bonus Plan in operation.

PLEASE write for application form to:—The Personnel Officer, The National Cash Register Co., Ltd., 206/216, Marylebone Rd., London, N.W.1. [1596]

TRAINED engineers required for interesting work on Radio/Radar equipments at a flying unit in North Wales; apply—Short Bros. & Harland, Ltd., R.A.E., Llanbedr, Merioneth, N. Wales. [1687]

A FULL-TIME technical experienced Salesman required for retail sales; write giving details of age, previous experience, salary required to:—The Manager, Henry's Radio, Ltd., 303, Edgware Rd., London, W.2. [149]

TECHNICIAN required for the Service and Repair of hearing aids; experience essential; hours 8.45 a.m.-5 p.m., 5-day week; apply to—Personnel Officer, Phillips Electrical, Ltd., 45, Nightingale Lane, Balham, S.W.12, or Tel. Kelvin 7766; for an appointment. [1680]

GRAMPIAN Reproducers Ltd., Hanworth Trading Estate, Feltham, Middlesex, require Senior and Junior engineers for Development Department and Testroom, experienced in Public Address, Audio and Telephone Equipment.—Apply Department R.B. [197]

TELECOMMUNICATIONS Technical Officers, Board of Trade (Civil Aviation).—Posts for men aged at least 23 for installation and maintenance of navigational aids and communications equipment at Civil Aerodromes and other stations in the United Kingdom. QUALIFICATIONS: O.N.C. in Electrical Engineering, or City and Guilds Intermediate Certificate in Telecommunications (old syllabus, i.e. subject No. 50) plus Radio II, or Intermediate Telecommunications Certificate (new syllabus, i.e. subject No. 49) plus Certificate in Mathematics B, Telecommunications Principles B, and Radio and Line Transmission B, or equivalent standard of technical education, and at least 5 years' appropriate experience.

SALARY (national): from £955 (at 23) to £1,147 (at 28 or over); scale maximum £1,295 (somewhat higher in London); prospects of promotion; non-contributory pension.

WRITE (preferably by postcard) to Civil Service Commission, Savile Row, London, W.1, for application form, quoting S/207/66. Closing date 1st March, 1967. [1691]

PHOTOGRAPHICALLY minded young man required as personal assistant to development engineer on photographic electronics, work includes testing and repair of photographic electronic equipment.—Gerrard 6410, Bovens, Ltd., 9, Gerrard St., London, W.1. [1675]

ELECTRONIC DESIGN & DEVELOPMENT ENGINEERS (ALL GRADES) SALARIES UP TO £2,800 p.a.
ELECTRONIC TEST & SERVICE ENGINEERS (ALL GRADES) SALARIES UP TO £1,600 p.a.
TECHNICAL SALES ENGINEERS (EXPERIENCED) SALARIES UP TO £2,500 p.a.
TECHNICAL AUTHORS (ALL GRADES) SALARIES UP TO £1,800 p.a.
 ALSO
DRAUGHTSMEN, PRODUCTION ENGINEERS
 We have over 500 registered vacancies for above types of engineers in the Home Counties and South England areas. If you have had at least 2 years' experience in British Industry and require a job which offers first class prospects, top salaries and interesting work
 Phone (anytime day or night) or write to:—
ELECTRONICS APPOINTMENTS LTD.,
 Norman House,
 105-109, Strand, W.C.2.
 TEMple Bar 5557-8.



ARE YOU...?

THE CIVILIAN TECHNICIAN WE NEED TO SUPPORT THE ROYAL NAVY OF THE 1970's

- In other words, DO YOU—*
- Have an ONC or an equivalent qualification in Mechanical, Electrical or Electronic engineering.
 - Seek a varied career associated with modern engineering techniques and equipment.
 - Desire a place in the salary scale £1,129—£1,288, if you are a competent technician, or £884—£1,091, if you are under 25 and require further experience, with the prospect of promotion to the highest posts of the technician class at £2,000 plus.
 - Wish to serve initially in London, Bath, Portsmouth, Copenacre (Wilts.), Portland, Barrow, Glasgow, Manchester, Newcastle or Southampton with the opportunity of transfer to other parts of the country later.

If so, write for application form to:
Superintendent of Production Pool (Naval),
Room 98, Empire Hotel,
Bath, Somerset.



Engineer: Like to switch to computers?

We are looking for young men to train as IBM Data Processing Customer Engineers: men with ambition, personality and confidence, who will enjoy working largely on their own initiative (a quality rewarded particularly well at IBM). Here are the facts:—

 As a DPCE you will work with your own customers on some of the world's most advanced punched card and computer systems.

 You will get a really thorough training on data processing equipment during your initial three months, followed later by computer training.

 You will start at not less than £1,100 a year, more for special aptitude or experience. Salary increases are on merit—within three years you could be earning £1,750. It's really up to you. At IBM drive and initiative are rewarded particularly well; promotions are always made on merit and from within the company.

 There are valuable benefits including a non-contributory pension scheme, free life assurance and sickness benefit.

 To qualify you should be between 21 and 29 with radar or telecommunications experience or ONC/HNC Electrical or Electronic. However, if you are between 18 and 22 and have a basic knowledge of electro-mechanics, we would still like to hear from you—there are opportunities to train as junior Customer Engineers.

Please write, giving details of age, experience and background to Miss S. A. Jones, IBM United Kingdom Limited, 101, Wigmore Street, London W.1., quoting reference DP/WW/687.

IBM



TEST ENGINEERS
PYE TELECOMMUNICATIONS LTD.
CAMBRIDGE

Due to rapid expansion of this Company in the communication field and the progressive promotion within the organization, a number of vacancies exist for engineers.

Ideally we are looking for men capable of fault finding and checking to an exacting specification V.H.F. and U.H.F. communication equipments involving valve and transistor circuitry. Training will be given to all applicants with the right background.

Suitable applicants will join our permanent staff and will enjoy the benefits of a Company which is offering first class financial rewards and rapid advancement within the organization.

Apply to:

The Personnel Manager,
Pye Telecommunications Ltd.,
Newmarket Road,
Cambridge.

Phone: Cambridge 61222.



English Electric Leo Marconi

Computer servicing

Have you had experience in the Forces or Industry, maintaining radio and radar equipment?

If so, there could be a career for you as a Computer Engineer with English Electric Leo Marconi, Britain's leading company in the field of digital computers.

Salaries, fringe benefits and conditions of employment are all that you might expect from such a successful organisation.

Full time training would be given in our own schools in London or Kidsgrove and vacancies exist in all parts of the country.

For further information write to:—
Personnel Officer, Dept. WW.M.3,
English Electric-Leo-Marconi Computers Ltd.,
24 Minerva Road,
Park Royal,
London N.W.10.

IMPERIAL COLLEGE

SENIOR

ELECTRONICS TECHNICIAN

To assist in design and construction of equipment incorporating conventional transistor circuitry, micrological and advanced digital and analogue systems, used for research in Chemical Engineering and Chemical Technology. This is an opportunity to join a lively development group.

Good pension scheme and conditions. Salary in range £972-£1,290 depending on qualifications and experience. Write in confidence to: Professor G. R. Hall, Dept. of Chemical Engineering & Chemical Technology, Imperial College, Prince Consort Road, London, S.W.7.

REQUIRED fully experienced male or female fault finder for transistor work, top rate paid, hours 8-4.30. 5-day week, pension scheme, canteen facilities. —Apply Remploy, Ltd., 68-80, Queens Land Rd., Holloway, N.7. 11874

TECHNICAL Authors experienced in radar and electronic subjects to write Ministry handbooks in Home Counties, Midlands and North West, salary £1,500-£1,800, pension and fringe benefits.—Apply Box 1672. 11672

TEST ENGINEERS required. Experienced in testing radio communications equipment. Must be able to diagnose fault conditions, and align and calibrate such equipment. Staff appointments, excellent starting salaries. Call, phone or write.—The Personnel Manager, Redifon, Ltd., Broomhill Rd., Wandsworth, S.W.18. Vandvke 7281. 11665

WEST London Aero Club invite "A" and "B" licensed engineers with capital and/or necessary equipment to commence Radio Workshop. Alternative propositions may be considered. Write full details to—White, Waltham Airfield, near Maidenhead, Berks. 1158

TEST and Service Engineer, experienced in testing, commissioning and servicing of relay and solid state logic systems required by company manufacturing machine tool controls, London, W.C.1 area: applicants who are prepared to travel in U.K. and abroad should write to—Box W.W. 1686.

LASKY'S RADIO have vacancies in all London branches for R.F. equipment, radio, and electronic component salesmen—with or without experience, top wages and good promotion prospects in our expanding organisation, experienced window/display man also required.—Call or write to Head Office: 3-15, Cavell St., London, E.1. Tel. Ste. 4821. 11673

A CHANGE is as good as a feast; we have several vacancies for Salesmen in our photographic store; must be capable with enthusiastic selling ability; some photographic knowledge essential; the positions are progressive with good pay and bonuses; apply personally to—Direct Photographic Supplies, Ltd., 224, Edgware Rd., London, W.2. 11923



THE INDEPENDENT TELEVISION AUTHORITY

is seeking young men with experience in electronics to join their engineering staff as

TECHNICAL ASSISTANTS

based at transmitting stations throughout the United Kingdom. The Technical Assistant is a junior member of a team of three which is responsible, during its day or evening shift, for the operation and maintenance of a television transmitter and its ancillary equipment. Some of the equipment is recently developed from prototype and the work is both challenging and rewarding. Normally a **Higher National Certificate** would be required but, as excellent residential training courses are provided after a settling-in period, young men who have not reached this standard may be considered provided their background and experience are suitable.

The duties are on a shift basis (day and evening) each normally of 8 hours' duration; the evening shifts finish shortly after programme close down at about midnight. Starting salary is within the scale of £950 to £1,225 per annum, depending on age, experience and qualifications. There are facilities for those with suitable qualifications to progress after a period of service to an engineering grade with a progressive salary range to £1,650 per annum. Leave and general conditions of work are good and there is a pension scheme.

Apply to

Personnel Officer,

**THE INDEPENDENT TELEVISION AUTHORITY,
70 Brompton Rd., Knightsbridge, London, S.W.3**

quoting Ref. No. WW/583.

BUCKS WATER BOARD

Instrumentation and Radio Maintenance Assistant

Applications are invited from persons experienced in the design and maintenance of instruments, electronic and V.H.F. radio equipment for the post of Assistant on the above work.

House and garage will be made available if required; the post is permanent and superannuable for the right man after a qualifying period and the salary will be in accordance with the Supervisory Grade B—£950/£1,100 per annum.

Apply for details and application forms to R. Pownall, Esq., Engineer and Manager, Bucks Water Board, Byron Road, Aylesbury, Bucks.

MINISTRY OF DEFENCE

(AIR FORCE DEPARTMENT)

RAF INSTITUTE OF AVIATION MEDICINE, Farnborough, Hants, have vacancies for ASSISTANT EXPERIMENTAL OFFICERS and EXPERIMENTAL OFFICERS for a variety of projects associated with biological/physiological research in aviation. Candidates should have an adequate background in experimental techniques and some will be required to design and construct electrical/mechanical apparatus for experiments. Previous experience in the medical field is not essential and the work is interesting, challenging and full of variety.

Salary Assistant Experimental Officers—£633 (age 18) rising according to age to £1,087 (age 26) and thence to £1,318 (max.) per annum.
Experimental Officers—£1,365 rising to £1,734 per annum.

Qualifications Candidates should be British subjects with GCE 'A' level in two scientific subjects or ONC if under 22 and HNC or equivalent if over 22.

Application forms from Ministry of Defence CE2a (Air), Sentinel House, Southampton Row, London, W.C.1.



EUROPE'S SPACECRAFT CONTROL CENTRE

OPERATIONS CONTROLLERS

The Operations Group is now recruiting staff, including the Head of Section for its Network Control Section

IN NOORDWIJK, HOLLAND

This Section is responsible for the operational use of the ESRO network of telemetry and tracking stations which will initially support the ESRO I and II spacecraft missions during this year.

The work will, in addition, involve development of operational procedures, preparation of technical documentation and the supervision of contractors.

Experience in the use and maintenance of electronic equipment in an operational role is expected.

There are a few vacancies for ELECTRONIC ENGINEERS

in other parts of the Control Centre

Total take home pay will be in the range of £1,300-£2,900 p.a. Removal, installation and children's allowances may be payable.

Please write giving career history to the

**HEAD OF PERSONNEL,
EUROPEAN SPACE RESEARCH ORGANISATION,
36 rue la Pérouse, Paris 16ème,**

quoting reference CC/1/67



VHF TEST ENGINEERS

CAMBRIDGE WORKS LIMITED have vacancies in their expanding Test Organisation for men with experience of VHF Transmitters and Receivers.

Men with Service training in VHF equipment would be suitable.

Progressive rates of pay and promotion and good facilities for training are offered.

*Apply: Personnel Manager,
Cambridge Works Limited,
Haig Road, Cambridge.*

ELECTRONICS Technician with O.N.C. required to work in a team concerned with maintenance of equipment throughout the Hospital and School, and the design and development of new medical instrumentation; salary range £329-£1,056 p.a., plus £75 London Weighting, with superannuation; apply in writing with names of 2 referees to the Secretary, Guy's Hospital Medical School, London Bridge, S.E.1. quoting Ref. P/WW. [1681]

ST. Laurence's Hospital, Dublin, 7. Electronics Maintenance Technician. Applications are invited for the above position. Experience of servicing repair of electrical, electro-medical and electronics equipment and apparatus essential. Salary: £852×£40-£1,052 p.a. according to experience.—Application forms obtainable from Secretary with whom completed application forms must be lodged not later than 12 noon on 20th March, 1967. [1676]

MOUNT VERNON HOSPITAL, Northwood, Middx. —Electronics Technician required in the Physics Dept.; duties include maintenance of Linear Accelerator and construction and servicing of electronic apparatus; minimum qualifications, ONC (or the equivalent) in Electrical Engineering or Applied Physics, and practical electronic experience; experience of Linear Accelerator servicing would be an advantage; appointment will be as NHS Senior Technician; salary within the range £945-£1,181 p.a.; applications with full particulars (age, qualifications and experience) to the Hospital Secretary, by 24th February, 1967. [1689]



THE GENERAL POST OFFICE

has vacancies for

RADIO OPERATORS II

at its

COAST RADIO STATIONS

Applications are invited from men between 21 and 35 years of age who must hold either the Postmaster General's First or Second Class Certificate of Competence in Radiotelegraphy or an equivalent certificate issued by a Commonwealth Administration or the Irish Republic.

The posts, which will be temporary in the first instance, carry a salary scale of £698-£1,010, dependent on age at entry, but successful applicants will be eligible to enter the open competitive selection for permanent appointment to be held in the Spring and Autumn of this year.

Applicants should write to:
The Inspector of Wireless Telegraphy,
Union House, St. Martin's-le-Grand, London, E.C.1
or telephone London HEADquarters 5628 for further information.

INNER LONDON EDUCATION AUTHORITY

Wandsworth Technical College, Wandsworth High Street, S.W.18.

Electrical Engineering Department

RADIO AND TELEVISION DESIGN OR SERVICE ENGINEERS

who are interested in part-time teaching of their subject at evening classes are invited to apply by letter to the Head of the Electrical Engineering Department at the above College. Previous teaching experience is not essential. Rates of pay and other conditions of service will be explained on interview.

**CENTRAL ELECTRICITY GENERATING BOARD
SOUTH WESTERN REGION
WESTERN DIVISION
OLDBURY-ON-SEVERN NUCLEAR POWER STATION**

ASSISTANT ENGINEER (INSTRUMENTS)

Applications are invited for the above appointment at Oldbury-on-Severn Nuclear Power Station. The Station, which is situated about 14 miles north of Bristol, is due to commence generation in 1967 with an output of 600 MW. New features of the design include pre-stressed concrete pressure vessels enclosing reactors and boilers, once-through boilers, centralised control, data processing by computers and solid state devices for protection circuits.

The successful candidate will be responsible to the Instrument Engineer and will be required to carry out maintenance and technical investigations on specialised items of plant. Initially, the work will involve assisting in the testing and commissioning of plant.

Applicants should preferably possess qualifications leading to Corporate Membership of one of the Senior Engineering Institutions, have had good instrumentation experience and preferably some knowledge of one or more of the following:—

- (i) Electronics
- (ii) Nuclear Instrumentation
- (iii) Data Processing Equipment including Computers

The salary for this appointment will be made within the range £1,325-£1,675 per annum, plus an allowance of £60 per annum. Good sick pay, holiday and superannuation schemes are in operation.

Postcards requesting application form SF/1 should be addressed to the Regional Personnel Officer, Central Electricity Generating Board, South Western Region, Oakfield House, Oakfield Grove, Clifton, Bristol 8, to whom the completed form, quoting reference VN25/67(W), should be returned by 28th February, 1967.

IBM Laboratories

Electrical Technician

A vacancy exists for an Electrical Technician in the Evaluation and Inspection Group. The job involves setting up test apparatus and assisting in tests on integrated circuits and micro intercommunications, and in the evaluation of printed circuits including the use of environmental equipment. Experience in transistor circuitry and the use of high quality electronic equipment would be an advantage. Candidates should be studying for H.N.C. or equivalent and be in the age group 20-25 years. Day release will be available if an approved course of studies is being followed.

Conditions of employment are first class and the benefits include non-contributory pension and life assurance schemes, generous sickness benefit allowance and three weeks annual leave.

Write, giving full details, to the Personnel Manager, IBM United Kingdom Laboratories Limited, Hursley Park, Nr. Winchester, Hants, quoting ref. ET/WW/280.



WEST BROMWICH EDUCATION AND LIBRARIES COMMITTEE

WEST BROMWICH TECHNICAL COLLEGE

LECTURER in electronics

radio servicing and television servicing, to teach National Certificate Course in Electrical Engineering and be responsible for the final course in radio and television.

Applicants should have a degree in Electrical Engineering and/or equivalent qualification and also suitable industrial and teaching experience. Duties will commence on 1st May, 1967.

Salary: £1,875 per annum rising to £2,140 per annum.

Application forms, available from the College should be returned to the Principal within two weeks of the appearance of this advertisement.

J. H. Turner, B.Sc.,
Director of Education

NATURAL ENVIRONMENT RESEARCH COUNCIL

The Seismology Unit of the Natural Environment Research Council have a vacancy for a Technical Officer Grade III.

Duties: Operation, construction and maintenance of electronic equipment in the laboratory and in the field.

Qualifications: Ordinary National Certificate in an appropriate subject, or evidence of an equivalent standard of technical education, and five years' apprenticeship, plus experience in electronics. Driving licence essential.

Salary Scale: £790 (age 21)-£915 (age 25)-£1,120.

The scale is at present subject to review.

Applications: Stating age, qualifications, and experience should be sent to Dr. S. Crampin, Natural Environment Research Council, Seismology Unit, 6 South Oswald Road, Edinburgh 9, by 31st March, 1967.

TRAINEE RADIO TECHNICIANS A PROGRESSIVE CAREER IN THE FIELD OF RADIO AND ELECTRONICS

Applications are now invited for an intensive training course of 3 years, leading to appointment as a fully qualified RADIO TECHNICIAN, with further prospects of profession to the Telecommunication Technical Officer Class.

Generous pay and conditions while under training. Candidates must be over 16 and under 21 years of age as at September 4th, 1967, on which date training commences.

Minimum educational qualifications required are passes at GCE "O" Level in English Language, Mathematics and Physics (already held or expected to be obtained in the Summer 1967).

A grade 1 pass in the CSE in these subjects will also be accepted.

Closing date for applications—31st March, 1967.

Interviews will be commenced about end of April.

Apply for full details and application form to:—
The Recruitment Officer (TRT),
Government Communications Headquarters,

"A" Block,
Oakley,
Priors Road,
Cheltenham, Glos.

COMPUTER ENGINEERS

Due to continued expansion NCR require additional **ELECTRONIC** and **ELECTRO-MECHANICAL ENGINEERS** for Computer Maintenance. Posts are available for men wishing to become Site Engineers.

Training Courses are arranged for suitably qualified men. H.N.C. Electronics, City & Guilds Final or equivalent standard required. Men from Forces with radar experience welcome.

Knowledge of electronic or electro-mechanical equipment necessary. Good Pension and Bonus Plan in operation.

Please write for application form to The Personnel Officer, The National Cash Register Company Ltd, 206/216 Marylebone Road, London NW1.

Plan your future with



ASSISTANT TELECOMMUNICATIONS ENGINEERS

Required by the GOVERNMENT OF KENYA, Police Department on contract for one tour of 24 months in the first instance. Gratuity 25% of total salary drawn. Free passages. Liberal leave on full salary. Accommodation provided at moderate rental. Generous education allowances. Outfit allowance.

(a) Assistant Telecommunications Engineers, Grade I.

Candidates, up to 50 years of age, must have served an approved apprenticeship and possess the City and Guilds Telecommunications Technician's Certificate or equivalent. They must have had at least five years' experience in Telecommunications engineering including considerable practical experience with fixed, mobile and portable Telecommunications equipment operating in the H.F. (including S.S.B. and I.S.B.) and V.H.F. (AM and FM) bands and associated aerial and mast installation plus a knowledge of transistorized and modern equipment. A knowledge of V.F. Multiplex equipment is also essential. Commencing salary according to experience in scale rising to £2,202 gross per annum.

(M3D/61095/WF)

(b) Assistant Telecommunications Engineers, Grade II

Candidates, up to 50 years of age, must possess the City and Guilds Telecommunications Technician's Certificate and/or a Commercial Electronic Engineering background and have had at least four years' practical experience with fixed, mobile and portable Telecommunications equipment operating in the H.F. (D.S.B. and S.S.B.) and V.H.F. (AM and FM) bands and associated aerial and mast engineering. Experience in the maintenance, repair and calibration of modern Telecommunications test equipment and of V.H.F. multiplex carrier equipment is desirable. Commencing salary according to experience in scale rising to £1,878 gross per annum.

(M3D/61097/WF)

Apply to CROWN AGENTS, M. Dept., 4 Millbank, London, S.W.1, for application form and further particulars, stating name, age, brief details of qualifications and experience, and quoting the relevant reference.

SOUTH OF SCOTLAND ELECTRICITY BOARD COCKENZIE POWER STATION

INSTRUMENT MECHANICS (SHIFT) required at the new power station now under construction on the South shore of the Firth of Forth, 10 miles east of Edinburgh. The duties are varied and interesting and involve working on modern electronic and pneumatic control systems, pressure, temperature flow and level equipment. C.C.T.V., chemical meters and a variety of telemetering. Candidates should have experience in at least one section of the above instrumentation and must be time served craftsmen. Basic salary £830 p.a. plus allowances for incidental overtime, productivity bonus and shift work, together with premium rates for Saturday and Sunday work provides the gross weekly payment of £22.4.7d. After two years satisfactory service an allowance of £20 p.a. is paid increasing to £40 p.a. after a further one year's service. Sick Pay and Superannuation Schemes. Housing may be available. Applications, in writing, should be submitted to the Station Superintendent, Cockenzie Power Station, Prestonpans, East Lothian, not later than 13th March, 1967.

AIR FORCE DEPARTMENT

ARE YOU:

- ★ INTERESTED IN DOING VITAL WORK ON R.A.F. RADAR AND WIRELESS EQUIPMENT?
- ★ Aged 19 or over and of good educational standard (G.C.E. "O" level passes in English Language, Maths and Physics or equivalent qualifications (desirable though not essential).)
- ★ Experienced in radio/radar servicing, with 3 years' training/practical experience.

IF SO, WE OFFER:

- ★ A first class opening as a Civilian Radio Technician. Starting salary of up to £962 p.a. (according to age), rising to £1,014, and good prospects of promotion (top posts in excess of £2,000 p.a.)
- ★ Facilities for Day release on full pay to attend O.N.C., H.N.C., City and Guilds etc., courses at Technical College.
- ★ 5-day week. 3 weeks 3 days annual leave at the start rising to 6 weeks, plus public holidays.
- ★ Excellent prospects of a good pension. If you do not qualify for a pension, then you receive a gratuity if you leave after at least 5 years' service.

Appointment (through a trade test, which can be taken at a local R.A.F. Station and an interview) will be initially at R.A.F. Sealand near Chester. Later it may be possible, to take up posts in other parts of the country.

Applicants should write to:—

MINISTRY OF DEFENCE (CE 3h [Air]),
SENTINEL HOUSE,
SOUTHAMPTON ROW,
LONDON, W.C.1.

or call at No. 30 MU Sealand between the following times:—
Monday-Friday 8.30 a.m. to 4 p.m.
Saturday 8 a.m. to 12 noon.

HAWKER SIDDELEY
AVIATION LIMITED

at

DUNSFOLD AERODROME

Require a

RADIO/ RADAR TECHNICIAN

Preferably an enthusiastic young man with a good theoretical Radio and Television background. Excellent salary and working conditions. Canteen, Pension and Life Assurance Scheme.

Contact:

Personnel Officer,
Hawker Siddeley
Aviation Limited,
Dunsfold Aerodrome,
Nr. Godalming,
Surrey.

PHYSICS Technician with experience in maintenance, design and development of electronics apparatus required for Clinical Neurophysiology Laboratory; salary on Whitley Council scale, £696 at age 21, rising to £868, plus £75 London Weighting; application forms from—House Governor and Secretary, Maudsley Hospital, Denmark Hill, London, S.E.5. [1690]

RADIO and TV Engineers.—Seltridges, Ltd., invite applications from fully experienced engineers for permanent positions in their Radio & Television Service Development. The duties will involve visiting customers' homes and carrying out repairs there; possession of a clean current driving licence essential; minimum wage £18; five-day week and discount on most personal shopping; apply—Assistant Staff Manager, 5th Floor, Seltridges, Ltd., Oxford Street, London, W.1. [1695]

ROYAL HOLLOWAY COLLEGE
(University of London)
Englefield Green, Surrey

SENIOR ELECTRONICS TECHNICIAN

required, to assist Physics group using microwave techniques to investigate radiofrequency gas discharges. Experience in constructing and servicing electronic equipment necessary. Salary on the scale £912-£1,150 a year plus qualification allowance and London weighting with superannuation. Applications, together with the names and addresses of two referees, should reach the College Secretary as soon as possible.

RADIO TECHNICIANS

A number of suitably qualified candidates are required for permanent and pensionable employment (mostly in Cheltenham, but from time to time there are some vacancies in other parts of the U.K., including London). There are also opportunities for service abroad.

Applicants must be 19 or over and be familiar with the use of Test Gear, and have had practical Radio/Electronic workshop experience. Preference will be given to candidates who can offer "O" level GCE passes in English Language, Maths. and/or Physics, or hold the City and Guilds Telecommunications Technician Intermediate Certificate or equivalent technical qualifications.

Pay according to age, e.g. at 19—£747, at 25—£962 (highest age pay on entry) rising by four annual increments to £1,104.

Prospects of promotion to grades in salary range £1,032-£1,491. There are a few posts carrying higher salaries.

Annual Leave allowance of 3 weeks 3 days rising to 4 weeks 2 days. Normal Civil Service sick leave regulations apply.

Application forms available from:—

Recruitment Officer (RT),
Government Communications Headquarters,
Oakley, Priors Road,
Cheltenham, Glos.

DON'T READ THIS

If you are not interested in electronics. If you are, and you want a job which encompasses your hobby, we are looking for people who, though not academically qualified, have a genuine interest in electronics.

The job we have in mind is installing or commissioning our electronic equipments. The successful applicant would travel extensively in the U.K. and later abroad. Factory training is available to familiarise him with the modern, up to the minute equipment and opportunity for advancement in an ever growing technical field is good.

If you are interested why not write for an application form to:—

Personnel Officer (RAR: 1049), G.E.C. (Telecommunications) Ltd. P.O. Box No. 53, Telephone Works, COVENTRY



G.E.C. (TELECOMMUNICATIONS) LTD., COVENTRY

BRITIMPEX, Ltd., Telefunken Distributors, are in the process of launching new range from Continental and particularly EFTA countries, including semiconductor devices, advanced electronic components, integrated circuits; competent Sales Engineer required to introduce above to the electronic industry; applying giving full particulars of previous work to—Britimpex, Ltd., 16-22, Great Russell St., London, W.C.1. [1679]

PROJECT Planning Engineer required for the estimating department of a leading Audio Communication Equipment Manufacturer capable of liaising with consultants and planning Engineers; permanent progressive position, contributory superannuation scheme; salary upwards of £1,000 per annum subject to negotiation; apply in writing to—Tannoy Products, Norwood Rd., London S.E.27. [1684]

ELECTRONIC Development Engineers, with good semi-conductor experience, required for a variety of interesting projects, mostly concerned with low frequencies and switching; good salaries for right men; resettlement allowances where appropriate; initial applications in writing please (treated in strictest confidence), stating age, experience, etc.—To Mr. R. Clark, Technical Director, Electronic Laboratories, Ltd., 22-23, Leigh Rd., Haine Industrial Estate, Ramsgate, Kent. [1696]

ADIVISION, Ltd., one of London's leading recording studios, has a vacancy for a technician for service and installation work on recording equipment; suitable applicants should have City & Guild's Certificate in electronic servicing, together with experience in prototype wiring and fault finding in transistorised equipment; some knowledge of Magnetic film recorders, optical recorders, professional tape recorders and disc cutting equipment, would be an advantage; application form from—Advision, Ltd., 83, New Bond St., London, W.1. Gro. 3342. [1682]

ARTICLES FOR SALE

CINTEL 20 Mc/s counter type 2821, needs attention: £75.—Tel. Lab. 4499. [18]
GOOD secondhand Ferrographs often available.—Reg. 2745 (Lon.). [110]
SAVE up to 20% on tape recorders and Hi Fi, new and guaranteed cash only. s.a.e. lists.—Microservice, Fourways, Morris Lane, Halsall, Lancs. [165]
PAIR of 50W transmitter receiver HSR11 Marconi mains PT. to PT. R.T., fair condition, handbook, Xtais, remote control desk telephone.—Box 11. [11]
"MURPHY NEWS" from Vol. 2 (few Vols. missing), good condition: offers.—Freeman, Duloe Rectory, Liskeard, Cornwall. [1688]
"WIRELESS World," 1949-'65, bound, volumes as new.—Taylor, 2, Greyfriars Drive, Penwortham, Preston, Lancs. [1694]
"WIRELESS World," 16 unbound volumes for sale. January 1950 to December 1965.—Box WW20, "Wireless World."

AS new HE-30 communications receiver (9 months use), 9 valves, 550 Kc/s to 30 Mc/s in 4 band-spread ranges; first offer £18 secures.—Headridge, 31, Crescent St., Dundee. [10]

NEW 10,000yds 14/0076 twin medium insulated circular braided flexible cable; £12 per 1,000yds.—W. D. Vick, Ltd., Station Rd., Acocks Green, Birmingham, 27. Aco. 1793. [14]

20% cash discount on most famous makes of Tape Recorders, Hi-Fi equipment, Cameras, etc. join England's largest mail order club now and enjoy the advantages of bulk buying. Send 5/- for membership card, catalogues, price lists and ask for quotation on any item.—C.B.A. (Dept. A15), 370, St. Albans Rd., Watford, Herts. [1670]

AVO Model 8, £10; Avo electronic test meter, £22; Taylor RF signal generator, £11; Leavers-Rich senior bulk eraser, £7/10; MSS studio disc recorder, £50; 50-watt recording amplifier, £35; 2 meters, 1ma, £1 ea.; one Ernest Turner 4in 1ma meter, £2/10; sundry microphone stands (floor), £3 ea.; ditto (table), £1/10 ea.; 2 Pullin VU meters, 4in, £4 ea.; Armstrong AF105 chassis, £10; no terms.—Letters to 90, Chorley St., Warrington, Lancs. [19]

NATIONAL INSTITUTE OF AGRICULTURAL ENGINEERING

ASSISTANT EXPERIMENTAL OFFICER/EXPERIMENTAL OFFICER with a background in electronics, physics or control engineering required to join a small team working on advanced projects connected with the measurement and control of temperature, ventilation and carbon dioxide concentration in greenhouses.
Qualifications: Appropriate Pass Degree, Dip. Tech. or H.N.C.
Salaries: A.E.O. £568-£1,243 per annum. E.O. £1,365-£1,734 per annum.
Five day week. Superannuation. Canteen. Hostel.
Application forms from: The Secretary, N.I.A.E., Wrest Park, Silsoe, Bedford.
Please quote ref: 67/ECD/14.

CENTRAL ELECTRICITY GENERATING BOARD SOUTH WESTERN REGION WESTERN DIVISION HINKLEY POINT NUCLEAR POWER STATION

ASSISTANT ENGINEER (INSTRUMENTS)

Applications are invited for the appointment of Assistant Engineer (Instruments) at Hinkley Point Nuclear Power Station, Nr. Bridgwater, Somerset.

Applicants should preferably possess a Higher National Certificate or equivalent qualification in electrical or radio engineering and have had experience in repair and maintenance of electronic and physical instrumentation. The successful candidate will be required to carry out repairs to electronic and physical instrumentation as applicable to a nuclear power station.

The salary for this appointment will be made within the range £1,510-£1,910 per annum, plus an allowance of £60 per annum. Good sick pay, holiday and superannuation schemes are in operation.

This vacancy was previously advertised and previous applicants need not reapply.

Postcards requesting application form S.F./1 should be addressed to the Regional Personnel Officer, Central Electricity Generating Board, Oakfield House, Oakfield Grove, Clifton, Bristol, 8, to whom the completed form, quoting reference VN 26/27 (W), should be returned by not later than the 28th February, 1967.

SOLARTRON Oscilloscope Type CD 513 for sale, in working order, approximately five years old; offers? to—Administrative Officer, Institute of Sound and Vibration Research, The University, Southampton. [1678]

PYE Ranger Base Station and 5 Ranger mobiles, all High Band FM, as new; £250 the lot; also Pye Ranger Mobiles, High Band AM25 Transistor Type: £35 each.—Tel. 061 Hull 5092 or Box WW 15, Wireless World.

BARGAIN Ampex "Fine-Line" series 1200 4-track tape recorder, Model No. 1263, complete with off tape monetary, 95kms o.n.o.; build-in model of the same type also available, £90; full demonstration available.—Ring Froy, either Riverside 9167 or Western 3153 or write: 30, Monckton Court, Melbury Rd., London, W.14. [1697]

A BETTER deal for cash customers. We do not provide interest free credit but offer very generous discounts for cash. Call, write or phone—we will quote. Every item of equipment despatched brand new in sealed cartons. Agents for all leading makes, amplifiers, tuners, motors, pick-ups, loudspeakers and tape recorders.—Audio Services, Ltd., 82, East Barnet Rd., New Barnet, Herts. Tel. Barnet 6605. [161]

ARTICLES WANTED

BUILT-IN radiogram transistorised chassis required for assembling.—Please write to CMS, Box 30569, Nairobi, Kenya. [1613]

WANTED—Cash paid for valves, televisions, radios, any quantity.—S. Willetts, 43, Spion Lane, West Bromwich, Staffs. [162]

C.R.T. pump, bake-out ovens, 25in capacity, also valve type A J192E for r.f. heater.—Details to Fell, Bull Ring, Harbury, Warwick. [12]

URGENTLY wanted, manuals or instruction books, data, etc., on American or British Army, Navy or Air Force radio and electrical equipment.—Harris, 93, Wardour St., W.1. [164]

WANTED, all types of communications receivers and test equipment.—Details to R. T. & I. Electronics, Ltd., Ashville Old Hall, Ashville Rd., London, E.11. Ley. 4986 [140]

URGENTLY wanted, manuals or instruction books, data, etc., on American or British Army, Navy or Air Force radio and electrical equipment.—Harris, 93, Wardour St., W.1. [164]

WANTED, N.E.V. or similar transistorised closed circuit T.V. camera, working or not; also closed circuit T.V. handbook.—Details to K. Rathbone, Esq., 2, Raeburn Close, Cheriton, nr. Alresford, Hampshire. Tel. Bramean 216. [121]

TEST ENGINEERS

Due to expansion the Decca Navigator Company Limited is in urgent need of Test Engineers for testing radio navigator and survey equipment. Applicants with a first class background of TV and radio servicing or telecommunications' electronic and control circuiting are required and salary will be commensurate with ability and experience.

Decca are world leaders in this field and have an extensive and interesting programme planned for the future.

If you would like to participate write giving brief details of experience, qualifications and present salary to:—



The Personnel Officer,
THE DECCA NAVIGATOR COMPANY LIMITED.
 88, BUSHEY ROAD, RAYNES PARK, S.W.20.
 Telephone: Wimbledon 8011 Please quote Ref.: 88/1/9

ENERGY CONVERSION LIMITED

A Company formed by a consortium consisting of British Petroleum, British Ropes, Guest, Keen & Nettlefolds and the National Research and Development Corporation to make fuel cells require

EXPERIMENTAL OFFICERS

for the Development Department.

The work entails construction and testing of prototype electronic control systems for self-sustaining fuel cells and specialised research instruments.

Applicants must have ONC-HNC in Electronics/Electrical Engineering.
 Salary commensurate with age, qualifications and experience.
 Pension Scheme—Subsidised Restaurant.

The Company is building new premises at Basingstoke, Hampshire for occupation late 1967.

Apply in writing to:

Personnel Section,
 Energy Conversion Limited,
 Chertsey Road, Sunbury-on-Thames,
 Middlesex.

ADVERTISEMENT

NUCLEAR SCIENCE AND TECHNOLOGY DEPARTMENT—ROYAL NAVAL COLLEGE, GREENWICH requires Scientific Assistant for setting up, calibrating and repair of electronic instruments used in laboratories and to assist experimentalists in operating equipment and collecting data. May be required to work on development of special purpose circuits using solid state devices.

Experience in maintenance, calibration and testing of electronic instruments desirable.

Candidates must be British Nationals and have G.C.E. with 4 "O" level passes or equivalent qualification.

Salary according to age from £426 (age 16) to £821 (age 25). Write: Secretary, Royal Naval College, Greenwich, S.E.10.

RADIO TECHNICIAN

Required by the GOVERNMENT OF THE FEDERATION OF SOUTH ARABIA, Ministry of Internal Security (Federal Guards), to serve as Assistant Signals Officer on contract for one tour of 18-24 months in the first instance. Salary according to experience in scale rising to £2,574 gross per annum. Gratuity 25% of aggregate salary. Liberal leave on full salary. Outfit allowance £60. Free passages. Education allowances. Government quarters at moderate rental.

Candidates 35 to 50 years of age, must be first class technicians, and possess a City and Guilds Final Certificate in Telecommunications, (or equivalent qualification); and have at least six years' experience of radio servicing. Supervisory and training abilities are necessary and a knowledge of Arabic would be advantageous.

Apply to CROWN AGENTS, M. Dept., 4 Millbank, London, S.W.1, for application form and further particulars, stating name, age, brief details of qualifications and experience, and quoting reference M3D/63318/W.F.

WANTED. T.V. wobblator with crystal marker facilities, non-mechanical sweep-oscillator system essential; combined instrument with oscilloscope considered.—Box WW 15, Wireless World.

BOOKS, INSTRUCTIONS, ETC.

MANUALS. circuits of all British ex-W.D. 1939-45 wireless equipment and instruments from original R.E.M.E. instructions; s.a.e. for list, over 70 types.—W. H. Bailey, 167a, Moffat Road, Thornton Heath, Surrey. CR4.5PZ. [143]

VALVES

VALVE cartons by return at keen prices; send 1/- for all samples and list.—J. & A. Boxmakers, 75a, Godwin St., Bradford, 1. [116]

VALVES WANTED

1 L6 required; state price.—Box No. 13. [13]

WE buy valves for cash, large or small quantities, old types or the latest; send details, quotations by return.—Waltons Wireless Stores, 15, Church St., Wolverhampton. [134]

The National Hospital, Queen Square, W.C.1

ELECTRONIC ENGINEER

required to design and develop electronic apparatus for medical research purposes. A general knowledge of amplifiers, cathode ray tube displays and digital circuitry is required.

The salary is in the range of £940 to £1,181 as Senior Physics Laboratory Technician or £1,148 to £1,458 as Chief Physics Laboratory Technician, according to age, qualifications and experience.

Applications, giving these details and the name of two referees to, Geoffrey A. Robinson, Secretary to the Board of Governors, at the above address.

SENIOR TEST SUPERVISORS TEST TECHNICIANS

The Canadian Marconi Company has gained further substantial orders for:

AIRBORNE DOPPLER NAVIGATIONAL EQUIPMENT and MICROWAVE CARRIER SYSTEMS.

To meet the increased work load we need some further first-class electronic technicians at our plant in MONTREAL.

Responsible and highly paid openings are available for SENIOR TEST SUPERVISORS to control sections of up to 25 technicians performing testing and trouble-shooting on highly complex and advanced equipment. Applicants should have a good academic and practical background including a knowledge of TRANSISTOR circuits, measurement techniques and modern test gear.

TEST TECHNICIANS are required for production testing and trouble-shooting on airborne navigational or microwave telecommunications systems.

U.K. INTERVIEWS

Senior engineers will be visiting London and possibly other centres in England to talk to applicants in early April. If you wish to be considered for one of these progressive openings, send brief details of career to date to:-

Mr. John Oliver,
Canadian Marconi Company,
c/o Directorate of Personnel,
(WW 2906 F),
English Electric House,
Strand, London, W.C.2.



TELECOMMUNICATIONS ENGINEERS

Required by the GOVERNMENT OF UGANDA, for service in the grade of Assistant Superintendent of Police (Radio) with the Ministry of Internal Affairs, on contract for one or two tours of 21-27 months each in the first instance. Salary (including overseas addition) according to age and experience in the scale £1,188-£2,202 a year. Gratuity 25% of total emoluments. Educational allowances. Out-fit allowance £30. Liberal leave on full salary. Accommodation provided at reasonable rental, or hotel allowance in lieu.

Candidates between 30 and 45 years of age, must possess a City and Guilds Final Certificate course 49 or equivalent qualification with at least 6 years' experience including installation and maintenance of fixed and mobile V.H.F. equipment (A.M. and F.M.); H.F. medium and low power S.S.B. and D.S.B. transmitters and receivers; Radio teleprinter equipment; Small diesel and petrol electric generating plants. Duties will also involve the supervision and instruction of local maintenance staff under training.

Apply to CROWN AGENTS, M. Dept. 4 Millbank London, S.W.1 for application form and further particulars, stating name, age, brief details of qualifications and experience and quoting reference M3D/62331/WF.

WEST BURTON POWER STATION



West Burton Power Station is a new station in pleasant rural surroundings in North Nottinghamshire.

INSTRUMENT MECHANICS

Vacancy No. 127/67MRG

Applicants should have experience of maintenance and fault finding work on pressure, temperature and flow measuring equipment. Any experience of electrical transmission systems, electronic equipment and automatic control equipment maintenance would be an advantage.

Gross weekly salary £22/4/8.

The above position involves shift working and it is expected that housing may be available a short time after appointment.

Apply in writing, quoting the appropriate vacancy number and giving details of age and experience to the Station Superintendent, West Burton Power Station, Retford, Notts.

CENTRAL ELECTRICITY
GENERATING BOARD
MIDLANDS REGION

VALVE and C.R. TUBE SPECIALIST STOCK-KEEPER

required by National Distributors for their London Stockrooms. A permanent position for a man of knowledge and experience with excellent prospects for advancement. Pensionable. Life Assurance, Sick Pay and Profit Sharing Schemes.

Write in confidence, stating age and full details of experience to Mr. Barrett,

BROWN BROTHERS LIMITED

Browns Buildings, 18/34, Great Eastern Street, E.C.2.

NEW GRAM AND SOUND EQUIPMENT

GLASGOW.—Recorders bought, sold, exchanged; cameras, etc., exchanged for recorders or vice-versa.—Victor Morris, 343, Argyle St., Glasgow. C.2. [120]

TAPE RECORDING ETC.

TAPE to disc transfer using latest feedback disc cutters; EPs from 21/-; s.a.e. leaflet.—Deroy, High Bank, Hawk St., Carnforth, Lancs. [162]

TAPE/DISC/TAPE transfer editing; duplicating; if quality and durability matter (especially with LPs from your precious tapes), consult Britain's oldest transfer service.—Fund raising records published for schools, musical societies (tax free).—Sound News Productions, 10, Clifford St., London, W.1. Reg. 2745. [108]

SAVE on cost of Hi-Fi. See Audio Supply notice (advert. No. 111). [109]

PERSONAL

HOUSE names in gold leaf on wood, 4inX16in, post free 57/6 from Wood Lodge Studio, Hilltown, N.I. [155]

LONDON BOROUGH OF EALING EDUCATION DEPARTMENT

LABORATORY TECHNICIANS

required in the Electrical Engineering Department of Southall College of Technology;

1. Miscellaneous Grade VI (Electronics and Physics). A post for a responsible man experienced in the construction and maintenance of electronic and scientific instruments.

2. Miscellaneous Grade V (Radio and Television Servicing). Applicants should have both interest and experience in radio, television or industrial electronics servicing work, and have some knowledge of the course associated with this work.

3. Miscellaneous Grade VI. To assist in the running of a group of light-current laboratories dealing with advanced work; industrial or similar experience essential.

Posts 1 and 2 to commence on 1st April; post 3 immediately.

Present salary scales: Miscellaneous VI—£860-£960; Miscellaneous V—£780-£890; plus London Weighting.

Salaries were increased on 1st February, 1967.

Apply to College Registrar, Beaconsfield Road, Southall, Middx., as soon as possible.

E. J. COPE-BROWN,
Town Clerk.

TRANSISTORS

SILICON Planar NPN transistors, 2N708 r.f. to 400Mc/s, 360Mw, 4/-; 2N2368 r.f. amplifier to 650Mc/s, 5/-; all new; data 6d.—R. A. Import Co., 125, Balfour Rd., Ilford. (Postage add 1/-.) [1877]

MISCELLANEOUS

METALWORK, all types cabinets, chassis, racks, etc., to your own specification, capacity available for small milling and capstan work up to 1in bar. PHILPOTT'S METALWORKS, Ltd., Chapman St., Loughborough [151]

PATENTS

THE Proprietors of British Patent No. 937,452 are prepared to sell the patent or to license British manufacturers to work thereunder; it relates to "Improvements in Antenna for Broadcasting"; address—Bullt, Wade & Tennant, 112, Hatton Gdn., London, E.C.1. [1683]



The Civil Service

Professional and Technical Appointments

POST OFFICE EXECUTIVE ENGINEERS

About 65 pensionable posts in London and Provinces for electrical, electronic and mechanical engineers to develop and design communications systems and postal service equipment.

QUALIFICATIONS: Degree or Dip. Tech. in Mechanical or Electrical Engineering, Physics, or Applied Physics or, exceptionally, very high professional attainment. Final year students may apply.

SALARY (Inner London): £877—£1,806. Promotion prospects.

AGE: At least 21 and normally under 35 on 31st December 1967. Some extensions for service in H.M. Forces or Overseas Civil Service. Write to Civil Service Commission, Savile Row, London, W.1., quoting S/322.

RADIO ENGINEERS

required by the GOVERNMENT OF ZAMBIA, Civil Aviation Department, on contract for one tour of 36 months in the first instance. Salary (including Overseas Addition) according to experience, in scale rising to £1,855 gross a year. In addition to salary, a supplement of not less than £200 a year is also payable. Gratuity 25% of total salary drawn. Liberal leave on full salary or terminal payment in lieu. Free passages. Quarters at low rental. Children's education allowances.

Candidates, aged 28 to 50 years, should have served a five year apprenticeship or have gained a Services Trade Certificate or an M.O.A. or I.C.A.O. Certificate of Competency (or equivalent), and must have had 8 years' post-qualifying experience. They must have sound theoretical knowledge of and experience in the maintenance, overhaul and installation of ground terminal radio communication equipment and navigational aids used at Airports and Flight Information Centres.

Apply to CROWN AGENTS, M Dept., 4 Millbank, London, S.W.1 for application form and further particulars, stating name, age, brief details of qualifications and experience, and quoting reference M3D/62800/WF.



TELECOMMUNICATIONS

We have vacancies for Fault Finders, Testers, and Inspectors to work on interesting and advanced equipment including H.F. SINGLE SIDEBAND, V.H.F. RADIO TELEPHONES, U.H.F. MINIATURE EQUIPMENT.

Transistor experience is essential. Vacancies exist at all levels and training will be given where necessary.

Apply: **Personnel Manager,**
CAMBRIDGE WORKS LTD.,
Haig Road,
Cambridge.

NEONS. PRINTED CIRCUIT BOARDS. INSTRUMENT CASES. MOULDED REED SWITCHES. CONTIL and BRIGHTLIFE products are all ex-stock. For details see January, 1967; November, 1966; September 1966, advertisements. For further details use reader service card.

WEST HYDE DEVELOPMENTS LTD.
30 HIGH STREET, NORTHWOOD, MIDDX.
Telephone: Northwood 24941.

WW-143 FOR FURTHER DETAILS

WELSH COLLEGE OF ADVANCED TECHNOLOGY
University of Wales Institute of Science and Technology (designate)

CARDIFF
DEPARTMENT OF APPLIED PHYSICS
M.Sc./DIPLOMA COURSE IN ELECTRONICS

Applications are invited for places in the full-time one year M.Sc./Diploma Course in Electronics, commencing October, 1967.

Further details can be obtained from the Registrar and Secretary, Welsh College of Advanced Technology, Cathays Park, Cardiff. Application forms should be completed and returned to the College as soon as possible.

TEST EQUIPMENT — SURPLUS AND SECONDHAND

SIGNAL generators, oscilloscopes, output meters, wave voltmeters, frequency meters, multi-range meters, etc., etc. in stock.—R. T. & I. Electronics, Ltd., Ashville Old Hall, Ashville Rd., London, E.11. Ley. 4986. [141]

SERVICES OFFERED

JOIN Audio Supply Association, 7/6 p.a. (65-page photographically illustrated, non-advertising) hi-fi catalogues, 4/6; your best guide for safe buying.—10, Clifford St., London, W.1. [111]



For Sound Sense

WEST NORWOOD LONDON SE27
GIPSY HILL 1131

WW-144 FOR FURTHER DETAILS



THE ONLY COMPREHENSIVE RANGE OF RECORD MAINTENANCE EQUIPMENT IN THE WORLD!



Send stamps value 9d. for 16 page booklet and supplementary data sheet Nos. 1 and 4 giving the fullest and latest information.

CECIL E. WATTS LIMITED
Darby House
Sunbury-on-Thames, Middx.

WW-145 FOR FURTHER DETAILS

INDUSTRIAL cathode ray tubes, short, medium and long, new and rebuilt; also contract capacity for rebuilt television tubes.—Lubeck Engineering Co., Old Brewery, Church Rd., Croydon 0141. [1695]

TAPE recorder repairs, we specialise in the servicing of recorders including professional machines.—Teleonic Ltd., 92, Tottenham Court Rd., London, W.1. Mus. 8177. [169]

ALL types steel cabinets, boxes, chassis, etc. made to order, one offs welcome. Send drawings, patterns, or specifications to—Hawley Supply Co. (Electrical), Ltd., 93, Regent St., London, W.1. [17]

ELECTRONICON, Ltd.—From drawing board to production with minimum delay; let us be your research development, design and prototype department. Pilot production runs a speciality.—176, Lythalls Lane, Coventry. Tel. Nuneaton 2353 or Coventry 86544. [160]

TOROIDAL Coil Winding, transformers, transductors, inductors, etc., designed and made to order; quick delivery, 1 to 1,000.—Magtor, Ltd., 68, Dale St., Manchester, 1. Cen. 3031. [159]

A GUIDE TO SURPLUS COMMUNICATION RECEIVERS

A detailed guide to thirty-one receivers:—

AR88D	CR100	P104	R1132
AR88LF	CR150	R107	R1155
BC312	CR150/2	R109	R1392
BC342	CR150/3	R206	R1475
BC348	PCR	R208	TCS
BC453	PCR1	R209	52 set
BC454	PCR2	R216	HRO
BC455	PCR3	R220	Senior

7/6. P. & P. 1/-. Mail order only to:

ADKINS, Dept. WW, 72 Courtenay Avenue,
Harrow, Middlesex

WW-146 FOR FURTHER DETAILS



SKIN DIVERS SEA WATCH
£5-19-6
FREE STAINLESS STEEL BRACELET

Swiss made. WATER-PROOF TO 186 FEET. Elapsed time bezel. 23 Jewel. Date change. Stainless steel. Heavy

illuminous hands and figures. Sweep second hand. Six months' written guarantee. LADIES' "MINI" MODEL ALSO AVAILABLE—SAME PRICE. If in doubt send S.A.E. for glossy photographs.

Send cheque/P.O. £5/19/6, plus 3/6 P. & P.
EXCHANGE & MART OF BOSCOMBE,
(Dept. 3), 33 Curzon Road, Bournemouth, Hants.

WW-147 FOR FURTHER DETAILS

EXCLUSIVE OFFER

PERMANENT OR TRANSPORTABLE STEEL 60-FOOT AERIAL TOWERS

As supplied to British and other Governments

- ★ Unique design.
- ★ Scientific construction.

having the following remarkable features.



- ★ Entirely self supporting, requiring no guys, stays, foundations, pickets or spikes, or any attachment to the ground.
- ★ Fitted with step ladder to the top and balcony with railings all round (You can walk right round the top with both hands free.)
- ★ 12 feet square at base tapering to 6 feet square at top, they are quite safe when subjected to gale force winds and will accept 50 square feet superficial area on top at force of 60 m.p.h. They require ground area of 20 feet square.
- ★ Will support up to 2 tons of equipment on top, the whole tower can be completely lowered to the ground by 2 men in 20 minutes and raised in the same time.
- ★ Can be completely erected and dismantled by 3 men.
- ★ Breaks down for transport by 2 ton lorry into parts easily handled by 2 men, there are no small loose parts, no nuts or bolts to get lost or damaged; all screws and adjustments are fully protected from rust and so designed to be free from damage when transported or left loose on the ground.

- ★ Foolproof—the Tower cannot be erected if not assembled correctly. No skilled labour is required and no special tools are necessary.
- ★ Can be raised and lowered, erected and dismantled and removed as many times as desired.
- ★ Everything necessary for the complete Tower to be put into use and raised and lowered is provided; full drawings and instructions.

These fine Towers were made in England by B.I.C.C. and cost the Government £2,200 each. They are BRAND NEW and in maker's original packing. You can see one erected at our premises.

Cost £2,200
Price Brand New
£345

40-page list of over 1,000 different items in stock available—keep one by you.

★ Narda 500 w. Ultrasonic Cleaner.....	£85 0
★ Sliding Shelves rack mounting.....	23 0
★ Magnetic Recording Wire, 1-br. reel.....	22 0
★ 3M Video Recording Tape, 1in.....	55 10
★ Wirehead Decade Oscillator B.105.....	25 0
★ Marconi S.S.B. Receivers HR-22 2 32 mc/s.....	£140 0
★ 9 foot BC-610 Whip Aerials.....	£1 15
★ R.C.A. 420 Mc/s. Yaci 5 el. Beams.....	£2 10
★ Model 15 Teletype Page Printers.....	£29 10
★ Model 14 Teletype Tape Readers.....	£25 0
★ Model 14 Teletype Repetitors.....	£25 0
★ R.C.A. 25 watt Projector Loudspeakers, range 1 mile.....	£14 10
★ Metro-Vickers Vacuum Pumps 230 v. A.C.....	£22 10
★ Precision Mains Filter Units.....	£10 10
★ E.M.I. Recording Bridges.....	£12 10
★ Avo Geiger Counters.....	£7 10
★ Philco W. S. No. 43 Transmitters 350W.....	£75 0
★ Metro-Vickers HS.500 Waveform Monitors.....	£135 0
★ E.M.I. 8794 Waveform Monitors on trolleys.....	£45 0
★ Motorola 8 v. Mobile Transmitters 30/40 Mc/s.....	£12 10
★ Pen-type Personal Dosimeters.....	15
★ Western Electric Relay Test Sets 1-181.....	£9 10
★ Monitor Type 58 and Power Units.....	£7 10
★ Marconi TF 1053 Noise Meters.....	£45 0
★ AN/URM-17 Spectrum Analysers 10/10000 Mc/s.....	P.U.R.
★ AN/URM-33, 34, 35 Signal Generators 1000/8000 Mc/s.....	P.U.R.
★ AN/PDR-27 Radiac Sets.....	£17 10
★ SG1A/ARN and MD-83A/ARN V.O.R. Test Sets.....	P.U.R.

Carriage extra at cost on all above.

We have a large quantity of "bits and pieces" we cannot list—please send us your requirements—we can probably help—all enquiries answered.

P. HARRIS
ORGANFORD — DORSET
WESTBOURNE 85051

WW-148 FOR FURTHER DETAILS



MAKE 5 DIFFERENT TRANSISTOR RADIOS FOR 39/6

Amazing Radio Construction Set! Become a radio expert for 39/6. A complete Home Radio Course. No experience needed. Parts including instructions for each design. Step-by-Step plan, all Transistors, loudspeaker, personal phone, knobs, screws, etc., all you need. Box size 14in. x 10in. x 2in. (parts available separately). Originally £6. NOW 39/6 plus 4/6 P. & P.

Frustrated Import Shipment Offered **BELOW HALF PRICE** to Clear: 500 Only

PERSONAL TRANSCIEVER SETS. Our Price **£5.19.6**

You've heard about them—you've read about them. NOW YOUR CHANCE TO OWN THEM. Highly sensitive two-way transistor transceiver sets have individual volume control and talk-listen switch. Telescopic aerial pulls in the voice from the other set over tremendous distances—no wires—a genuine transceiver as used by official bodies and forces. 500 sets only.

NEW FULLY TRANSISTORISED PORTABLE RADIOS



with Full Variable wave-band. NOW A FRACTION OF THE NORMAL PRICE ONLY **29/6**

WHY PAY MORE? All the latest refinements are packed into this new MULTI-STATION ALL Transistor radio—the internal aerial picks up even the remote stations and the powerful built-in speaker gives room filling volume. Individual tuning, first-class reception. Purchase with confidence, packed in original manufacturer's cartons. (Personal carcase and battery 4/6). Send 29/6 plus 4/6 P. & P.

AMAZING No soldering CIGARETTE RADIO ONLY 25/-



Yes, a perfectly ordinary packet of cigarettes! But watch your friends astonishment on hearing its range of stations loud and clear. Holds 10 cigarettes—yet conceals sensitive, fully transistorised circuit (including tiny battery). A young boy can assemble it in under 2 hours. No soldering. Only 16 connections to make ALL PARTS including semi-conductors. ABC Plans, etc. ONLY 25/- plus 2/6 post, etc. Parts available separately.

CONCORD ELECTRONICS LTD. (DEPT. W.W.20) 77 NEW BOND STREET, LONDON W.1

WW-149 FOR FURTHER DETAILS

R & R RADIO & TV SERVICE
Dept. W.W.
MARKET STREET, BACUP, LANCOS.
Telephone 405

SALVAGE VALVES

10P14 5/-	PL82 3/6	20P5 6/6	PCCR4 4/-
EF80 1/6	30P4 7/-	10F1 1/6	PC183 5/-
EOCR2 3/-	PY81 3/6	ECL80 3/6	EB81 1/6
30PE1 5/-	U301 6/-	30F5 5/-	EF85 5/-
PY32 6/-	PX33 6/6	10P13 5/6	EF87 6/-
6U40T 5/-	20D1 1/6	PCF80 4/-	20P3 6/-
30P12 6/-	PL81 5/-	30PL1 6/-	EY86 4/-
PY82 4/-	PL36 6/-	PL800 5/-	U329 5/-

Speakers Ex T.V., 6x4in. 3/6; 8in., round 6/-; postage on speakers 4/-.

Ekco Line O/P Trans., U26 type 35/- post paid.

Ferr. 406 Type 30/-, Ferr. 306T, new, £310/- post paid.

Scan Coils, etc., Quote set model No. with all enquiries. S.A.E. for prompt reply.

B.S.R. Gerrard and Goldring Decks Supplied.

Recording Tape, 5 1/2 in 1,200ft, 16/9 post paid.

SERVICE & REPAIRS

B.B.C.2, TV, RADIO, TAPE REC. SERVICE SPARES

U.H.F./625, modify your set to B.B.C.2, 1955 to 1963 models covered, manufacturers' complete kits and tuners, send for free list. Ferguson 625 IF amp chassis, 39/6 (or less valves 19/6), circuit and instr., 3/6, p/p, 4/6; Phillips, complete 625 conversion kit including circuit, 70/-, p/p, 6/-; GEC/Sobell sound and vision dual 405/625 IF amp and output chassis, 42/6, p/p 4/6; new UHF tuners, including valves, 29/6; or Phillips transistorised, 70/-, p/p 4/6. Fireball Tuners, new, tested, exclusive offer of special manufacturers' types suitable for KB, Ultra, Ferguson, HMV, etc., 75/-, new turret tuners, Brayhead 3001/3 58/6; Cyldon c/f 19/6; Brayhead 10, 16, 35Mc/s 19/6; KB 16, 38Mc/s 10/-; Ekco 16Mc/s 10/-; post 4/6; many others available. TV Signal Boosters, transistorised, Pye/Laigear B1/B3 and u.h.f. battery 75/-, u.h.f. mains 97/6, u.h.f. masthead 105/-, post free; L.O.P.'s, scan coils, framed output transf. mains droppers, etc., for all popular makes CRTS, 14, 17, 19in from £4/5 (callers only). Tape recorder belts, heads, motors, etc. Salvaged components, large selection transformers, scan coils, tuners, etc. Enquiries invited, c.o.d. despatch available—Manor Supplies, 62 Golders Manor Dr. London, N.W.11; callers 589B, High Rd., N. Finchley, N.12 (near Granville Rd.). Hill. 9118 (day), Spe. 4032 (evg). [101]

DAMAGED METER?
Have it repaired by Glaser

Reduce overheads by having your damaged Electrical Measuring Instruments repaired by L. Glaser & Co. Ltd. We specialise in the repair of all types and makes of Voltmeters, Ammeters, Microammeters, Multirange Test Meters, Electrical Thermometers, Recording Instruments, etc.

As contractors to various Government Departments, we are the leading Electrical Instrument Repairers in the Industry. For prompt estimate and speedy delivery send defective instruments by registered post, or write to Dept. W.W.:


L. GLASER & CO. LTD.
1-3 Berry Street, London, E.C.1
Tel.: Clerkenwell 5481-2

WW-152 FOR FURTHER DETAILS

ADJUSTABLE HOLE & WASHER CUTTERS

The right tool for trepanning holes 1"-12 1/2" in diameter

In our range of 17 Models

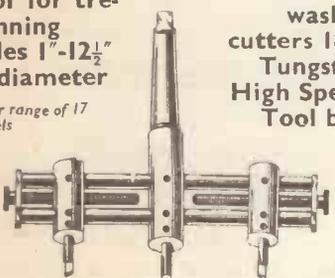

Adjustable hole and washer cutters 18% Tungsten High Speed Tool bits

Write for illustrated brochure of our full range with straight or Morse taper 1-4 or Bitstock shank. All models available from stock

AKURATE ENGINEERING CO. LTD.
Cross Lane, Hornsey, London, N.8
TEL. FITZROY 2670

WW-150 FOR FURTHER DETAILS

RESISTANCE WIRES
EUREKA - CONSTANTAN
Most Gauges Available

**NICKEL-CHROME MANGANIN
NICKEL-SILVER**

COPPER WIRE

ENAMELLED, TINNED, LITZ, COTTON AND SILK COVERED

SMALL ORDERS PROMPTLY DESPATCHED

B.A. SCREWS, NUTS, WASHERS soldering tags, eyelets and rivets


EBONITE and BAKELITE PANELS.

TUFNOL ROD, PAXOLIN TYPE COIL FORMERS AND TUBES. ALL DIAMETERS

SEND STAMP FOR LIST TRADE SUPPLIED.

POST RADIO SUPPLIES
33 Bourne Gardens, London, E.4
Phone: Clissold 4688.

Quartz Crystal Units

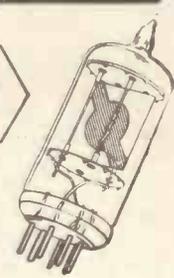

For ACCURACY RELIABILITY PRICE ECONOMY

you can **DEPEND** on

THE QUARTZ CRYSTAL CO. LTD.
Q.C.C. Works, Wellington Crescent, New Malden, Surrey (MALDEN 0334 & 2988)

Write for illustrated Brochure & Price List

WW-153 FOR FURTHER DETAILS










symbol of quality

trade only

for electronic components - by return

WW-151 FOR FURTHER DETAILS

FAMOUS ARMY SHORT-WAVE TRANSRECEIVER MK. III

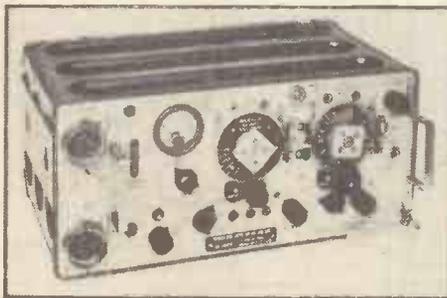


head and mike set (made for this set) only 15/-, post 2/6. NEW 12 volt D.C. power unit for these sets, 30/-, carriage 5/-. NEW aerial tuning units 20/-, post 7/6. We make a mains 200-50 volt A.C. power unit in louvred metal case to plug direct into set power socket to run (1) receiver 70/-, post 5/-. (2) TX and RX, £6/10/-, post 7/6. A charge of 10/- to unpack and test the receiver of these sets is made only if requested, to cover the cost of repacking set.

A FEW 2nd Grade sets at £3, carriage 15/- as above available.

This set is made up of three separate units:— (1) a two valve amplifier using a 6V6 output valve; (2) (some only) a V.H.F. transreceiver covering 229-241 Mc/s. using 4 valves; (3) the main shortwave Transmitter/ receiver covering, in two switched bands, just below 2 Mc/s./4 Mc/s. and 4 Mc/s.-8 Mc/s. (approx. 160-37.5 metres) using 9 valves. For RT, CW and MCW. The receiver is superheterodyne having one R.F. stage, frequency changer, two I.F. (465 Kc/s), Signal detector, A.V.C. and output stage. A B.F.O. included for CW or single side-band reception. Tx output valve 807, other valves octal bases. Many extras, e.g. netting switch, quick flick dial settings, squelch, etc. Power requirements LT 12 volts, HT receiver 275 volts D.C. HT transmitter 500 volts D.C. Size approx. 17 1/2 in. x 7 1/2 in. x 11 in. Every set supplied NEW in carton with a 12 pin connector and full book including circuits at only £4/10/-, carriage 15/-, with V.H.F. TX/RX 10/- extra. BRAND NEW and boxed No. 10

WALKIE-TALKIE MK. III and CRYSTAL CALIBRATOR No. 9



This set is housed in a waterproof die-cast aluminium case made by Murphy Radio for the Govt. having only reliability and quality in mind. Range 7.3 Mc/s.-9 Mc/s. On side of set is crystal calibrator No. 9 which gives pips on marks provided on the Tuning dial. Transmitter tunes to the same FX as receiver. Set uses a total of 5 valves, power required L.T. 3 volts D.C., H.T. 100-175 volts D.C. Sets supplied in NEW or as new condition, boxed, only 50/-, Carriage 10/-

JOHN'S RADIO (Dept. F)
 OLD CO-OP, WHITEHALL ROAD,
 DRIGHLINGTON,
 BRADFORD.
 Tel. DRIGHLINGTON 732

RECEIVERS AND AMPLIFIERS + SURPLUS AND SECONDHAND

H RO RX5s, etc., AR88, CR100, BRT400, G209, S640, etc., etc., in stock—R. T. & I. Electronics, Ltd., Ashville Old Hall, Ashville Rd., London. E.11. Ley. 4996. [142]

TECHNICAL TRAINING

P.M.G. Certificates, City & Guilds Examinations, I.E.R.E. Also many non-examination courses in Radio, TV and Electronics. Study at home with world famous I.C.S. Write for free Prospectus stating subject to—International Correspondence Schools (Dept. 443), Intertext House, Parkgate Rd., London S.W.11. [168]

CITY & GUILDS (Electrical, etc.) on "Satisfaction or Refund of Fee" terms. Thousands of passes. For details of modern courses in all branches of electrical engineering, electronics, radio, T.V., automation, etc., send for 132-page handbook—free—B.I.E.T. (Dept. 152K), Aldermaston Court, Aldermaston, Berks. [146]

BECOME "Technically Qualified" in your spare time, guaranteed diploma and exam, home-study courses in radio, TV, servicing and maintenance. R.T.E.B., City & Guilds, etc., highly informative 120-page Guide—free—Chambers College (Dept. 837K), 143, Holborn, London, E.C.1. [166]

BI-PAK—VALUE PAKS NEW—UNMARKED—UNTESTED

- 120 GLASS SUB-MIN. GERM. DIODES 10/-
- 20 MIXED VOLTS. UP TO 10 WATTS ZENERS 10/-
- 25 SILICON NPN TRANSISTORS 10/-
- 60 SUB-MIN 200 MA SILICON DIODES 10/-
- 20 GERM. 1 AMP. RECTIFIERS 10/-
- 16 TOP HAT 750 MA SILICON RECT. 10/-
- 50 MIXED TRANSISTORS 10/-

TESTED NEW VALUE PAKS

- 15 Red Spot AF Transistors PNP 10/-
- 15 White Spot RF Transistors PNP 10/-
- 4 OA10 Diodes, Mullard..... 10/-
- 6 Matched Trans. OC 44/45/81/81D 10/-
- 4 2G417 Trans. EqVt. AF117 .. 10/-
- 2 200 m/c NPN Trans. BSY27 10/-
- 4 OA202 Sil. Diodes Sub-min. 10/-
- 8 OA81 Diodes CV448 Type 10/-
- 1 5 AMP. SCR. 100 Piv..... 10/-
- 2 Power Trans. OC26/35 10/-

MIN. ORDER 10/-, CASH WITH ORDER PLEASE. ADD 1/- Post and Packing PER ORDER. Full Lists 100's Bargains 6d. in stamps.

BI-PAK SEMICONDUCTORS
 8 Radnor House, 93-97 Regent St., London, W.1. Mail only.

WW-155 FOR FURTHER DETAILS

SURPLUS HANDBOOKS

19 set Circuit & Notes	4/6 p/p	6d
1155 set Circuit & Notes	4/6 p/p	6d
H.R.O. Technical Instructions	3/6 p/p	6d
38 set Technical Instructions	3/6 p/p	6d
46 set Working Instructions	3/6 p/p	6d
89 set Technical Instructions	5/- p/p	6d
BC.221 Circuit & Notes	3/6 p/p	6d
Wavemeter Class D. Tech. Ins.	3/6 p/p	6d
18 set Circuit & Notes	3/6 p/p	6d
BC.1000 (31 set) Circuit & Notes	3/6 p/p	6d
CR.100/528 Circuit & Notes	8/6 p/p	6d
R.107 Circuit & Notes	5/- p/p	6d
A.R.88D Instruction Manual	15/- p/p	1/6d
62 set Circuit & Notes	4/6 p/p	6d
52 set Sender and Receiver Circuits	6/-	post free

Circuit Diagrams 3/- each, post free.
 R.1116/A, R.1224/A, R.1356, EP.24, 25 & 26, A.1134, T.1154
 C.R.300, BC.242, BC.312, BC.348J, E.M.P. 'R', BC.624, 22 SEP
 Resistor Colour Code Indicator, 1/6, p/p 6d.
 Postage Rates apply to U.K. only.

Mail order only to:
INSTRUCTIONAL HANDBOOK SUPPLIES, Dept. W.W.,
 TALBOT HOUSE, 28 TALBOT GARDENS, LEEDS, 8.

WW-156 FOR FURTHER DETAILS


WANTED

**CRYSTAL DIODES TYPE
 IN 23 B
 IN LARGE QUANTITIES**

**Telephone:
 OADBY (OLE 722) 5831**

The specialists
 in design and production of
**high grade
 sound equipment**

GRAMPIAN REPRODUCERS LTD



Hanworth
 Trading Estate,
 Feltham, Middx.

For straight dealing deal with Grampian

WW-154 FOR FURTHER DETAILS

TECHNICAL TRADING Co.

- * LONDON—10 Tottenham Court Rd. Tel.: MUS 2639
 - * PORTSMOUTH—350-352 Fratton Rd. Tel.: 22034
 - * SOUTHAMPTON—72 East St. Tel.: 25851
 - * WORTHING—132 Montague St. Tel.: 2585
 - * BRIGHTON—Devonian Court, Park Crescent Place
- All Mail Order and 24-hour Robophone service Brighton 680722

BULK! STEREO DECODERS (Arens 6 transistor complete), 7 Gns.
BUY! AM/FM STEREO RADIOGRAM CHASSIS (Normally 26 Gns.), 17 Gns.
BUY! AM STEREO RADIOGRAM CHASSIS (Normally 18 Gns.), 11 Gns.

TRANSISTORISED TUNER CHASSIS

F.M.

machine (size 6in. x 4in. x 2 1/2in.), consists of a low noise frequency changer stage with smooth 2 gang tuning leading. No less than three IF Stages terminating in a double tuned discriminator and LF Stage giving ample output for all quality amplifiers. Operates with negligible drain for months of use from a P.P.3 or any 9 volt battery. *Sale Audio Amplifiers of very interesting specification in the course of preparation.*

£8-10

POST 2/6

OSMABET LTD.

WE MAKE TRANSFORMERS AMONGST OTHER THINGS
AUTO TRANSFORMERS. 0-110-200-220-240 v. A.C. up or down, fully shrouded, fitted terminal blocks, 50 w., 22/6; 75 w., 27/6; 100 w., 32/6; 150 w., 37/6; 200 w., 55/-; 300 w., 70/-; 400 w., 85/-; 500 w., 120/-; 1,000 w., 160/-; 1,500 w., £12; 2,000 w., £17.

MAINS ISOLATION TRANSFORMERS. Input 200-240 v. A.C. 1:1 ratio, 100 w., 70/-; 200 w., 110/-; 500 w., 240/-.

WINDS TRANSFORMERS. Input 200-240 v. A.C. TX1. 425-0-425 250 Ma., 6.3 v. 4 a. ct., 6.3 v. 4 a. ct., 0-6.3 v. 3 a., 110/-; TX2. 250-0-250 150 Ma., 6.3 v. 4 a. ct., 0-6.3 v. 3 a., 80/-; TX3. 250-0-250 80 Ma., 6.3 v. 2 a. ct., 6.3 v. 1 a., 45/-; TX4. 300-0-300 60 Ma., 6.3 v. 2 a. ct., 6.3 v. 1 a., 45/-; TX5. 300-0-300 120 Ma., 6.3 v. 1 a., 6.3 v. 2 a. ct., 6.3 v. 2 a., 60/-; TX7. 45-0-45 1 a., 50/-.

INSTRUMENT TRANSFORMERS. Prim. 200-240 v. A.C. Single tapped sec., 5-10-15-20-25-30-35-40-50-60. 10-0-10, 20-0-20, 30-0-30 v. A.C., 1 a. 27/6; 2 a. 37/6.

CHARGER TRANSFORMERS. Prim. 200-240 v. A.C. for charging 2-6-12 v.; 1 a., 15/-; 2 a., 22/6; 4 a., 26/-; 6 a., 32/6. Bridge contact recs., 2 a. 8/6; 3 a., 12/-.

OUTPUT TRANSFORMERS. Multi ratio, 7/10 watts. MRT10, 39 ratios, 25/-; Mullard 5/10 UL 45/-; 3/3, 25/-; etc., etc. Comprehensive range of transformers and chokes stocked. Carriage extra all transformers from 3/6 to 7/6 each.

TRANSFORMERS WOUND TO YOUR SPECIFICATION.

BULK TAPE ERASER and head demagnetiser, 200/250 v. A.C., suitable any size spool, any type head, 35/-, Leadet S.A.E.

BATTERY ELIMINATORS. Output 9 v. D.C., Input 200/250 v. A.C. PP3, 100 Ma., 45/-; PP3, 15 Ma., 17/6. Leaflet S.A.E.

CONDENSERS. Electrolytic, 5,000/50 v., 15/-; 2,500/50 v., 7/6; 5,000/12 v., 4/6; 1,000/25 v., 3/6; 500/330 v., 10/6; 200/450 v., 5/-; 100 x 200, 350 v., 5/-. Minimum postage 1/6.

LOUDSPEAKERS: SPECIAL OFFER. New stock, famous make. Heavy duty. 12in. 15 watt, 80/-; 25 watt, 90/-; 35 watt, 140/-, 3 or 16 ohms. Postage all speakers 5/6 each.

AUTOCHANGER: GARRARD 300. New stock to be cleared. 200/250 v. A.C., less cartridge, £6/10/-. P. & P. 7/6.

RELAY. Miniature open type. Coll. 7.5 K., 15 v. 2.5 Ma., single pole changeover, 7/6.

FLUORESCENT LOW VOLTAGE LIGHTING. Input 6, 12 or 24 v. D.C. Extensive range fluorescent fittings and inverters. Lists S.A.E.

RADIOGRAM CHASSIS. Extensive range. S.A.E.

S.A.E. all Enquiries please. Mail Order only
 48 KENILWORTH ROAD, EDGWARE, MIDDX.

Tel.: STOnegrove 9314

TO ALL

Manufacturers, Wholesalers, Importers, etc. of the Radio and Electronic Industries

We are spot cash purchasers for all types of redundant and surplus stocks.

Phone or write Hillside 2713
 Stonegrove 7624

Broadfields Disposals Ltd.,
 8, Broadfields Avenue,
 Edgware, Middx

or
 Mayco Products Ltd.,
 21 Lodge Lane,
 N. Finchley, N.12

SPECIAL OFFER!

ARMSTRONG, GARRARD, and other HI-FI UNITS, 33 1/3% Deposit, Bal. over 12 months.
 A.L. Stamford Ltd.
 98 Weymouth Terr.,
 London, E.2.



WW-157 FOR FURTHER DETAILS

TUITION

I.E.R.E., City & Guilds and R.T.E.B. exams; specialised I.C.S. home-study course will ensure success; for details of wide range of exam. and diploma courses in radio, TV and electronics, also new practical courses with kits, write to:—I.C.S. (Dept. xxx), Parkgate Rd., London, S.W.11. [170]

STUDY Radio, Television & Electronics with the world's largest, home-study organization. I.E.R.E., City & Guilds, R.T.E.B., etc. Also practical courses with equipment. All books supplied. Write for free prospectus stating subject to I.C.S., Intertext House, Parkgate Rd. (Dept. 442), London, S.W.11. [167]

AMERICAN

TEST & COMMUNICATIONS EQUIPMENT

AN/APN-9 Loran Rx.
 AN/VRD-19 Mobile F.M. Transceivers. Freq. 152/174 Mc/s. .O. 25W. Supply/V 24. Price £10.

AN/PRC-6 AN/URC-4 & AN/URC-11 "Handy-Talkies."

AN/ARN-6 & AN/ARN-44 Compass Receivers.
 AN/ARN-14 Power Supplies DY-66.

AN/FPN-13 X band Radar Beacons.
 CU-168/FRR 2/32 Mc/s Antenna Couplers.

T-216/GR XTAL Controlled Xignal Generator 225/399.9 Mc/s.

AN/USM-32 Oscilloscope.
 TS-118/AP RF. Wattmeters:

TS-27/TSM R-C Bridges.
 TS-170/ARN-5 I.L.S. Test Set.

TS-175A/U Freq. Meter 85/1000 Mc/s. Price brand new £85.

TS-297/U Multimeters.
 TS-382D/U AF/RF Signal Generators, 20 cps/200 kc/s.

TS-497B/UR Signal Generator 2/400 Mc/s.
 TS-147A/UP Radar Test Sets.

TS-917A/CG (Stelma TDA-2) Telegraph Distortion Analysers.

AN/UUR-13A 225/400 Mc/s. Receiver.
 ME-22/PCM Decibel Meters-45/+25 DBM.

DuMont 241 5in Oscilloscopes Price £19/10/-.
 Tektronix 541, 543 & 545 spare Tubes Type 5BHP2A. Price £14.

★ GENERAL CATALOGUE AN/102 1/- ★

SUTTON ELECTRONICS

Salthouse, Nr. Holt, Norfolk. Cley 289.

THE MOTOROLA SEMICONDUCTOR DATA BOOK

- lists more than 10,500 semi-conductors.
- includes data sheets for more than 2,800 devices from diodes to integrated circuits.
- has 16 edge referenced sections for fast fact finding.
- 1,500 page hard bound for 40/- including postage.

RADIO COMMUNICATION, by J. H. & P. J. Reyner. 60/-. Postage 2/-.

PRINCIPLES OF ALGOL 60 PROGRAMMING, by J. S. Collins & M. Almond. 18/6. Postage 1/6.

Inter. GEC. TRANSISTOR MANUAL. 18/- Postage 2/-.

COMPUTATIONAL METHODS & ALGOL, by G. Bull. 32/6. Postage 1/-.

RADIO RELAY SYSTEMS, by H. Carl. 65/- Postage 1/6.

RADIO VALVE DATA. Compiled by "WW," 8th ed. 9/6. Postage 1/-.

THE MODERN BOOK CO.

BRITAIN'S LARGEST STOCKISTS
 British and American Technical Books
 19-21 PRAED STREET
 LONDON, W.2
 Phone: PADdington 4185

R, C & L BOXES



CAPACITY 15pf to 111µF
RESISTANCE 0.1Ω to 100KΩ
INDUCTANCE 1mH to 10H
VOLTAGE DIVIDERS and
WHEATSTONE BRIDGES

LIONMOUNT & CO. LTD.
 BELLEVUE ROAD, NEW SOUTHGATE,
 LONDON, N.11, ENGLAND.

Tel: Enterprise 7047.

WW-158 FOR FURTHER DETAILS

RESISTORS

Carbon film, low noise.
 1/2 W. 10% 2/- doz. 15/- 100. Large quantities
 1/4 W. 5% 2/3 doz. 17/3 100. stocked.
 4.7Ω to 10MΩ, your choice (no 5% intermediate values).

TRANSISTORS

Over 100 popular types in stock including high power 100 Mc/s. ft and small signal β over 500 min. Over 1,000 quick delivery types listed at lowest prices. Examples 2N13045 .. each 4/3 BC107 .. 7/- ex stock. 2N2926 green .. 4/- BC108 .. 6/3
 Complementary matched pairs available.
 10% discount on orders over £3.

ELECTROVALUE

6 MANSFIELD PLACE, ASCOT, BERKS.


You are interested
 in Radio and
 T.V.?—Why not

PUT SOME LETTERS AFTER YOUR NAME

You can rapidly qualify in your spare time by means of an absorbingly interesting Chambers Postal Course. We offer expert and highly personal training backed by a "SATISFACTION-OR-MONEY-BACK" Agreement. Over 75 years' experience . . . thousands of successes.

FREE 100-PAGE GUIDE

Choose from hundreds of Courses—Practical Radio (apparatus supplied), Radio & T.V. Servicing, Applied Electronics, P.M.G. Cert., City & Guilds, R.T.E.B., A.M.I.E.R.E., Radio Amateurs Exam., etc. Send today for the informative 100-Page Chambers Guide To Success—FREE. (Please state Career, exam, or subject of interest).



Chambers College

(Dept. 855F) 148 Holborn, London, E.C.1.

BUILDING A "SCOPE"

Indicator unit type 10Q53. One of the finest units to appear on the surplus market, modern manufacturer, 10B.7.G. and 3.10. valves, built in E.H.T. unit producing 3kV to a modern version of the 5in. V.C.R. 517 tube, brilliance, focus, x and y shift. Controls on front panel, circuit diagram supplied. Ideal for conversion to an oscilloscope. Size of unit 7in. x 7 1/2in. x 19in. long. Brand new in maker's case. 60/- carriage 19/-. Circuit diagram sold separately, 3/9, if required.

New Catalogue No. 17. Government and manufacturers surplus. Also new components, 3/- post free.

RADIO CONTROL 93 NORTH ROAD
ARTHUR SALLIS BRIGHTON SUSSEX
 Phone 65806
 EX GOVT. ELECTRICAL SURPLUS
WW-159 FOR FURTHER DETAILS

DINSDALE MK II AMPLIFIERS

Printed circuits and parts for mono and stereo versions. Special new power amp. printed board eliminates earth loop problems.

Multiplex Decoder. 'Hi Fi News' G. D. Browne circuit with new P.C. board, all parts available including coils. Parts for WW 20 watt amplifier including Driver Transformer. SAE for Lists.

MULLARD 10W A.B. TRANSISTOR AMPLIFIER. SPECIAL CLEARANCE

Printed Circuit Boards to Mullard specification fully drilled and fluxed. Price 4/- each or 7/- for two post free.

Layout Diagrams 9d each.
 List of other parts available sent with each order.
HART ELECTRONICS
 321 Great Western Street, MANCHESTER 14

WW-160 FOR FURTHER DETAILS

WANTED

URGENTLY - FOR CASH
T-217/GR TRANSMITTERS
MD-129A/GR MODULATORS
R-278B/GR RECEIVERS
AND SPARES
(PART OF AN/GRC-27)

SUTTON ELECTRONICS
SALTHOUSE, HOLT, NORFOLK
GLEY 289

PADGETTS RADIO STORE

Old Town Hall, Liversedge, Yorkshire
 Tel. CLECKHEATON 2866
SUPERMARKET PRICES

TOP GRADE MYLAR TAPES. 7in. Standard, 11/6. L.P. 14/-.
 7in. D.P., 19/6. 5in. Standard 7/9. L.P. 10/- Post 1/6 per tape.

12in Speaker with built-in Tweeter, 28/6. Post Paid.

GARRARD SP25. Deck complete with Mono Cartridge, 28/2/6.
 plus Post and Insurance 10/-.

JAP Lapel Microphones, 5/-. Post paid.

JAP MINI METERS, size 3 1/2in. x 2in. SPECIFICATIONS:
 1 Sensitivity 1000 ohm per volt A.C./D.C. D.C. voltage 0-12v.,
 0-120v., 0-1200v. A.C. voltage 0-12v., 0-120v., 0-1200v. D.C.
 current 0-1mA, 0-120mA. RESISTANCE 0-200 ohm. Complete
 with Test Leads and Battery, 32/6. Post paid.

JAP PERSONAL EARPIECE, small or large plug, 1/11. Post paid.

TOP GRADE DIODES, 3/- doz. Post paid.

Audix
SOUND SYSTEMS
 AUDIO EQUIPMENT
 MANUFACTURERS
STANSTED, ESSEX.

Phone: STANSTED 3132

WW-161 FOR FURTHER DETAILS

TWO-BOB PLANARS

ME101 NPN Silicon. Brand new, first grade, guaranteed. P_c=250mW, I_{cm} 100mA, β=30-120 @ 1mA. C_{ob} 2.2 pF. f_T=100-Mc/s V_{cb} 20V. 2/-. Also high gain version β=100-200, 2/6. Data supplied. Also 2N2926 from 3/6; 2N3702, 5/-; 2N3704, 6/-; 2N3705, 5/-; 2N3707, 6/-; 2N3983/T1407, 6/-; AF10 10W Amplifier package 30/- in stock. 3d. stamp for list and data.

C.W.O. Mail order only. No C.O.D.

AMATRONIX LTD., 396 SELSDON RD., CROYDON, SURREY. CR2 ODE

WW-162 FOR FURTHER DETAILS

RADIO officers see the world. Sea-going and shore appointments. Trainee vacancies during 1967. Grants available. Day and boarding students. Stamp for prospectus.—Wireless College, Colwyn Bay. [128

ALDERMASTON Court Postal Training for B.Sc. (Eng.) Part 1, A.M.I.E.R.E., A.M.S.E., City & Guilds, G.C.E., etc. prepares you privately for high pay and security as Technician or Technologist, thousands of passes. For details of exams and courses in all branches of Engineering, Building, Electronics, etc. (including latest information on C.Eng.), write for 132-page handbook free; please state interest.—British Institute of Engineering Technology (Dept. 151K), Aldermaston Court, Aldermaston, Berks. [147

LONDON CENTRAL RADIO STORES

HORTSMANN CLOCKWORK TIME SWITCHES. 5A, one on, one off position, complete with key and connection block, enclosed in metal box. 30/-. P.P. 5/-.

10-WAY PRESS-BUTTON INTER-COM TELEPHONES in Bakelite case with junction box handset. Thoroughly overhauled. Guaranteed. 28/10/- per unit.

20-WAY PRESS-BUTTON INTER-COM TELEPHONES in Bakelite case with junction box. Thoroughly overhauled. Guaranteed. 27/15/- per unit.

WIRELESS SET No. 38 A.F.V. Freq. range 7.3 to 9.0 Mc/s Working range 1/2 to 2 miles. Size 10 1/2 x 4 x 6 1/2in. Weight 6 1/2lb. Includes power supply 8lb.—and spare valves and vibrator also tank aerial with base. 28 per pair or 23 single. P.P. 25/-

ELECTRICITY SLOT METERS (1/- in slot) for A.C. mains Fixed tariff to your requirements. Suitable for hotels, etc 200/250 v. 10 A. 80/-; 15 A. 90/-; 20 A. 100/-; P.P. 7/6. Other amperages available. Reconditioned as new, 2 years' guarantee.

QUARTERLY ELECTRIC CHECK METERS. Reconditioned as new. 200/250 v. 10 A. 42/8; 15 A. 52/8; 20 A. 57/8. Other amperages available. 2 years' guarantee.

TWIN GONG TELEPHONE, extension bells, 21/-.

P.M. MOVING COIL SPEAKERS. 5in. 9/8; 8in. 3 ohm 10/6. Elliptical 7 x 4in. 3 ohm 10/6. P.P. 3/6.

MOVING COIL HEADPHONES, chamois leather earpiece, 25/- P.P. 3/6.

S-BANK UNISELECTOR SWITCHES. 25 contacts, alternate wiping 22/15/-; 8 bank half wipe 22/15/-; 6 bank half wipe, 25 contacts 47/6. P.P. 8/6.

DESK PHONES. Black Bakelite cases complete with hand set, and internal bell, 42/6. P.P. 6/-.

HIGH-SPEED ELECTRO-MAGNETIC COUNTERS. Ex-Govt 0-999, 25/50 v. D.C. 8 1/2 x 4 1/2 x 1 1/2in. Single coil, 2,300Ω Single coil 500Ω, 8/6. P.P. 3/6.

EX GOVT. BALANCED ARMATURE THROAT MIKES complete with plug, new, 7/8. P.P. 3/6.

DESK PHONES. Various types in stock. Final End Selectors. Relays, various also 19 Receivers in stock. All for callers only.

23 LISLE ST. (GER 2969) LONDON W.C.2
 Closed Thursday 1 p.m. Open all day Saturday

WOODS 5in. FANS (new, boxed). 110/230 v. A.C., 45/- P.P. 5/-.
RE-SETTABLE HIGH SPEED COUNTERS. (3 x 1 x 3/4in.), 4 digit. 12/24/48 v. (state which), 6/6 ea. P.P. 2/6.
HIGH SPEED MAGNETIC COUNTERS. (4 x 1 x 1 1/2in.), 4 digit. 12/24/48 v. (state which), 6/6 ea. P.P. 1/-.
SANGAMO GEARED MOTOR. 1 r.p.m. 240 v., 27/6 ea.
COPPER LAMINATE PRINTED CIRCUIT BOARD. (8 1/2 x 5 1/2 x 1 1/2in.), 2/6 sheet. 5 for 10/-.

BULK COMPONENT OFFERS

100 Capacitors (latest types), 50 pf. to .5μf.
 250 Carbon Resistors, 1/4 and 1/2 watt (transistor type).
 250 Carbon Resistors, 1/2 and 1 watt.
 150 Hi-Stab. Resistors, 1/2, 1 and 1 watt.
 100 Capacitors (ceramic), 2 pf. to 1,000 pf.
ANY ITEM 10/- £2 THE LOT.

VENNER LIGHTWEIGHT ACCUMULATORS. (1 oz., 1 1/2 x 1 1/2 x 3/4in.), 2 volt 1.5 a.h., 12/6 ea. (with electrolyte and charging inst.).

SEALED RELAY. 4 c/o, 6/12 v., 45 ohm, 6/- ea. P.P. 1/6.
SEALED RELAY (G.E.C.). 2 c/o., 670Ω, 24 v., 6/- ea. P.P. 1/6.

TRANSISTOR CIRCUIT TESTER. Tests audio output, with built-in 1 kc/s oscillator and 0.25 v. 1/2 a. power supply. 27/10/-. P.P. 15/-.

TELEPHONE HANDESET (latest type), 15/- ea. P.P. 2/6.

AMPLIFIED TELEPHONE HANDESET. Latest type with built-in transistor amplifier and volume control, 35/- P.P. 2/6.

TRANSFORMERS. 50 v. at 5 amp., 35-0-35 volt at 1 amp. 25/- P.P. 5/-.

MOVING COIL HEADSET AND MICROPHONE. 10/- set. P.P. 2/6.

"3000" TYPE RELAYS. 10 for 25/- P.P. 2/6.

OSCILLOSCOPES. Cossor 1035, 22/10/-. P.P. 2/10/-.
LUSTRAPHONE MOVING COIL MICROPHONES. Type VC 152. (New, boxed.) Low or high impedance, 87/6 each. P.P. 2/6.

UNISELECTORS. 8 bank, 25 way, 50 ohm. (New and boxed), 50/- each.

PRECISION RESISTORS. 1% 10/- doz. (Several standard values included.)

VITREOUS W/W RESISTORS. 5% 25 for 10/-.

SOUND-POWERED TELEPHONE HANDESETS, 12/6 ea. P.P. 2/6.

TRANSISTORS (New marked stock). OC 44/45/71/81/ 81D/83, 3/- ea. 4 for 10/-. BCY34 5/-, BSY25 10/-, BSY26 7/6, 25323 7/6. GET115 (matched pair), 15/-, 25721 10/-, OC 16/24/25/28/29/35, 10/- each.

DIODES. SX632, SX781, 2/- each. 20/- doz. 400 P.I.V. 1/2 A. (unmarked diodes), 20/- doz.

SILICON CONTROLLED RECTIFIERS, BTY87 (100R), 100 p.i.v. 12 amp. 15/-; BTY91 (150R), 150 p.i.v. 16 amp. 20/-; 2N683, 100 p.i.v. 16 amp. 15/-.

SILICON CONTROLLED RECTIFIERS. CRS 1/30 (360 p.i.v. 1 amp.), 7/6. CRS 3/40 (400 p.i.v. 3 amp.), 10/- ea.

SPEAKER BARGAINS, E.M.I. (13 x 8in.) with double tweeters, 15 ohm, 65/- P.P. 5/-.

As above, less tweeters, 3 or 15 ohms, 45/- P.P. 5/-.
 Fane 12 in., 20 watt, with tweeter (15 ohm), 95/- P.P. 5/-.

CONNECTORS. 13 WAY "IN LINE" gold plated pins, 4/6 pair. P.P. 6d.

SILICON BRIDGE UNITS. GEX541, 80 p.i.v. 10 amp. 37/6. E11BD-RC, 100 p.i.v. 10 amp. 37/6. GA31-A (germ.), 200 p.i.v. 2 amp. 20/-.

PHOTOFLASH ELECTROLYTIC. 2,000μf. 275 v., 17/6 ea. P.P. 2/6.

ELECTROLYTICS. 100μf. 60 v. 3/6; 200μf. 250 v. 3/6; 100 400μf. 275 v. 6/6; 500μf. 100 v. 4/-; 1,000μf. 50 v. 5/-; 3,000μf. 100 v. 7/6; 5,000μf. 50 v. 7/6. P.P. 2/6 in 1/1.

"VINKORS." L.A. 2403/2405, 6/- ea. P.P. 6d.

COMPUTER BOARD. Containing 6 transistors A1672 (2N 706) and 18 diodes HG1078. 10/- each.

SAMWELL & HUTTON WOBBLATORS. Type 42B, 44S. P.P. 50/-.

VOLTMETERS, METAL-CLAD. (6in., edgewise mirror-scale.) New, boxed. 11-0-11 and 110-0-110 v. D.C. (f.s.d. 250 micro/amp.), 75/- P.P. 7/6.

TELEPHONE CONNECTING WIRE (internal). Twin twisted, 250 yds., 25/- coil. P.P. 5/- (copper conductor).

E.M.I. 3794 WAVEFORM MONITORS (Trolley mounted), 25/-.

STEREO OUTPUT AND BALANCE METERS. 200 mW. to 20 watts into 3/8/15 ohm, 1/10 ea.

ELECTRIC SLOT METERS (1/-), 25 amp. L.R. 240 v. A.C., 85/- ea. P.P. 5/-.

QUARTERLY ELECTRIC CHECK METERS. 40 amp. 240 v. A.C., 20/- each. P.P. 2/6.

TELEPHONE HAND MAGNETOS (70 v. A.C.). Trade enquiries welcomed.

All Goods Previously Advertised Still Available.

PATTRICK & KINNIE

81 PARK LANE, HORNCURCH, ESSEX
 Tel.: ROMFORD 44473

WE OFFER a large range of Patterns of
TRANSFORMER LAMINATIONS
in RADIOMETAL, MUMETAL and H.C.R.

Stocks of most patterns available.
Please send for list.

ALSO AVAILABLE "C" & "E" CORES,
CASE AND FRAME ASSEMBLIES

J. BLACK

44, GREEN LANE, HENDON, N.W.4
Phone: SUNnyhill 1855 & 3033.

WW-163 FOR FURTHER DETAILS

**TRAIN TODAY
FOR TOMORROW**

Start training TODAY for one of the many first-class posts open to technically qualified men in the Radio and Electronics industry. ICS provide specialized training courses in all branches of Radio, Television and Electronics—one of these courses will help YOU to get a higher paid job. Why not fill in the coupon below and find out how?

Courses include:

- RADIO/TV ENG. & SERVICING
- AUDIO FREQUENCY
- CLOSED CIRCUIT TV
- ELECTRONICS—many new courses
- ELECTRONIC MAINTENANCE
- INSTRUMENTATION AND SERVOMECHANISMS
- COMPUTERS
- PRACTICAL RADIO (with kits)
- NEW PROGRAMMED COURSE ON ELECTRONIC FUNDAMENTALS

Guaranteed Coaching for:

- Inst. Electronic & Radio Eng's.
- C. & G. Telecom. Techns' Certs.
- C. & G. Supplementary Studies.
- R.T.E.B. Radio/T.V. Servicing Cert.
- Radio Amateur's Examination
- P.M.G. Certs. in Radiotelegraphy
- General Certificate of Education

Start today - the ICS way
**INTERNATIONAL
CORRESPONDENCE SCHOOLS**
Dept. 230 Parkgate Rd., London, S.W.11.
Please send FREE book on

Name

Address

2.67

**WORLD RADIO & T.V.
HANDBOOK 1967 ED. 32/-**

By JOHANSEN. Postage 1/-

- Transistor Transmitters for the Amateur by Stoner. 21/-, P. & P. 1/-.
- Electronic Motor Control by Lytel. 30/-, P. & P. 1/3.
- Basic Piezoelectricity by Shields. 20/-, P. & P. 1/-.
- Radio Valve Data, new 8th ed. by Wireless World. 9/6, P. & P. 1/-.
- Transistor Substitution and Specification Manual, 1967 by Techpress. 21/-, P. & P. 1/-.
- Hi-Fi Year Book, new 1967 ed. 15/-, P. & P. 1/6.
- ABCs of Silicon Controlled Rectifiers by Lytel. 16/-, P. & P. 1/-.
- Rapid Servicing of Transistor Equipment by King. 30/-, P. & P. 1/3.

Where possible 24-hour service guaranteed

UNIVERSAL BOOK CO.
12 LITTLE NEWPORT ST., LONDON, W.C.2
(Leicester Square Tube Station)

HAMMERITE HAMMER PATTERN BRUSH PAINT FOR PANELS, METALWORK, ETC.

3/6 tin ● just brush on ● withstands 150°C, oil, water etc.
COLOURS: Blue, silver, black or bronze. 2½ oz tins, 3/6. ½ pint 7/6. 1 pint 15/-. ½ gallon 35/-. 1 gallon 58/-. Carr. up to 5/- 2nd, up to 10/-, 1/8, over 10/-, 3/-. *Bent by road.

From component shops or direct from the manufacturer.
FINNIGAN SPECIALTY PAINTS (WV) Mickley Square, Stocksfield, Northumberland. Tel: Stocksfield 2280

WW-164 FOR FURTHER DETAILS

SPECIAL OFFER

1 watt S.T.C. 300 Mc/s. N.P.N. Silicon Planar 100% Transistors. Limited stocks, £1 for six, with data.
3/- each. OC44, OC45, OC70, OC71, OC81, OC81D, OC200, GET16, GET20.

ZENER DIODES

3.9 v. to 26 v. all votors BETWEEN ½ w. 3/6, 1.5w. 5/-, 7 w. 6/- each.
4/- each. AF114, AF115, AF116, AF117, OC170, OC171.

Send 6d. for full lists:—inc. S.C.R., Zeners, etc.

**CURSONS,
78 BRADBURY STREET,
CANTERBURY KENT**

WW-165 FOR FURTHER DETAILS

**YUKAN SO PROFESSIONAL THE YUKAN
SELF-SPRAY AEROSOL WAY —
Get these AIR DRYING GREY HAMMER
or BLACK WRINKLE (CRACKLE) Finishes**

Yukan Aerosol spraykit contains 16 ozs. fine quality durable easy instant spray. No stove baking required. Hammers available in grey, blue, gold, bronze. Modern Eggshell Black Wrinkle (Crackle) all at 14/11 at our counter or 15/11, carriage paid, per push-button self-spray can. Also Durable, heat and water resistant Black Matt finish (12 ozs. self-spray cans only) 13/11 carriage paid.
SPECIAL OFFER: 1 can plus optional transferable snap-on trigger handle (value 5/-) for 18/11, carriage paid. Choice of 13 self-spray plain colours and primer (Motor car quality) also available.
Please enclose cheque or P.O. for total amount to:

YUKAN, Dept. WW/2.
307a EDGWARE ROAD,
LONDON, W.2.
Open all day Saturday. Closed Thursday afternoons.

- Other Yukan Air Drying Aerosols include:
- Zinc Chromate Primer.
- Clear Lacquer.
- Anti-Tarnish Gold
- and Metallic Finishes.

DINSDALE HIGH QUALITY AMPLIFIER

Complete sets of Metalwork, engraved Front Panels, Printed Circuits and all 1st grade specified Components for Mono and Stereo Units. Ancillary Equipment. Comprehensive lists available.

Send 6d. in stamps for lists

MALVYN ENGINEERING WORKS

Engineers to the Radio and Electronic Industries
7 CURRIE STREET, HERTFORD, HERTS.

TELEPHONE: HERTFORD 2264

MANUFACTURERS OF ELECTRONIC EQUIPMENT

Can we assist you by manufacturing Control Panels, Assemblies, Sub-Assemblies. Long or short runs. Quality guaranteed.
Rock & Taylor Ltd., Hayes Lane Trading Estate, Lye, Worcs. Tele: Lye 2807/2822

NYLON · P.T.F.E.

ROD, BAR, SHEET, TUBE, STRIP, WIRE
No quantity too small. List on application.
BRASS · COPPER · BRONZE
ALUMINIUM · LIGHT ALLOYS
STAINLESS STEEL
H. ROLLET & Co. Ltd.
Howie Street, S.W.11. BAttersee 7872
ALSO AT LIVERPOOL, BIRMINGHAM,
MANCHESTER, LEEDS, GLASGOW

WW-166 FOR FURTHER DETAILS

WANTED. Your redundant or surplus stocks of Transformer Laminations, "C" Cores, Enamel Copper Wire, Transistors and Diodes.

GOOD PRICES PAID.

J. BLACK

44 GREEN LANE, HENDON, N.W.4.
Phone: SUNnyhill 1855 & 3033.

WW-167 FOR FURTHER DETAILS

DEIMOS LTD

**TAPE RECORDERS FOR
RESEARCH, INDUSTRY AND
PROFESSIONAL AUDIO**
single and multichannel

8 CORWELL LANE, HILLINGDON, MDX.
HAYes 3561

WW-168 FOR FURTHER DETAILS

A 59/11d COMPUTER FOR FUN?

Not exactly. DIGI-COMP is a model working mechanical digital computer that you programme for binary calculations, logical problems, and games, such as nlm. The basic Instruction Manual was written with eleven-year-olds in mind, while the Advanced Booklet analyses all the problems and discusses them in terms of boolean algebra and symbolic logic—then you can write your own programmes for DIGI-COMP. Money-back guarantee. Free component replacement service. Send 59/11 (or £3/10/6 to include the Advanced Booklet), or write for details to:—
I-COR SYSTEMS (Digital Projects)
18 Stamford Hill, London, N.16

WW-169 FOR FURTHER DETAILS

TRANSISTOR BARGAINS

3/- each: OC44, OC45, OC46, OC70, OC71, OC72, OC76, OC78, OC78D, OC81, OC81D, 4/- each: AF114, AF115, AF116, AF117, AF118, AC128, AC127, AC128, OC170, OC171, OC172, 4/6: AF119, OC169, OC84. 8/-: AC107, OC23, OC26, OC28. All the above are fully tested and guaranteed. Also available untested, unmarked Transistors, 60 for 10/-.
Discount for Quantity Orders available on request.

A. MARSHALL & SON
(Dept. W.W.4),
28 Cricklewood Broadway, London, N.W.2
Tel. No. GLA 0161

NEW MULLARD TRANSISTORS
 OC71 6/-; OC72 7/6; OC81D 6/-; OC81 6/-; AF115 8/-;
 AF114 8/6; OC44 8/-; OC45 8/-; OC171 9/-; OC170 8/6;
 AF117 7/-; OC26 12/6; AD140 15/-; OC35 15/-; Holders 1/3.

ARDENTE TRANSISTOR TRANSFORMERS
 D3035, 7.3 CT: 1 Push Pull to 3 ohms for OC72, OC81. 11/-
 D3034, 1.75: 1 CT. Push Pull Driver for OC72, OC81. 11/-
 D3059, 11.5: 1 Output to 3 ohms for OC72, OC81. 11/-

TRANSISTOR MAINS ELIMINATORS
 Famous "Power-Mite" 9 volt. Same size as PP9 45/-
 battery. Fully smoothed, 150mA full-wave circuit.
POWER PACK 9v. 300mA full wave. Fully smoothed 45/-

WEYRAD P50 — Transistor Coils
 RA2W 6in. Ferrite Aerial with car aerial coil... 12/6
 Osc. P50/AIC... 5/4
 470 ke/s. I.F. P50/2CC 5/-
 3rd I.F. P50/3CC... 8/-

Volume Controls
 Lone Spindles, Midget Size 5 K. ohms to 2 Meg. LOG or LIN. L/S 3/-; D.P. 5/-; STEREO L/S 10/8; D.P. 14/6

COAXIAL PLUG 1/- PANEL SOCKET 1/- LINE SOCKETS 2/-
 OUTLET BOXES, SURFACE OR FLUSH 4/6.
 BALANCED TWIN FEEDERS 6d. yd.. 80 or 300 ohms.
 TELESCOPIC CHROME AERIAL. 6in. extends to 23in. 6/6.

FULL WAVE SELENIUM RECTIFIERS:
 2, 6 or 12v. outputs, 1 1/2 amp., 8/9; 2 a. 11/3; 4 a., 17/6.
CHARGER TRANSFORMERS P. & P. 2/6. Input 200/250 v. for charging at 2, 6 or 12 v., 1 1/2 amps., 15/6; 2 amps., 17/6; 4 amps., 25/-; Circuit free. Ammeter 0 to 5 amp., 10/6.

MOVING COIL MULTIMETER TK 25. 47/6
 0-1,000 v. A.C./D.C. ohms 0 to 100k., etc.
MOVING COIL MULTIMETER EP10K. 79/6
 0-1,000 v. A.C./D.C. ohms 0 to 3 meg. etc.
MOVING COIL MULTIMETER EP20K. 79/6
 0-2,500 v. D.C. 20,000 ohms per volt, 0-1,000 v. A.C. Ohms 0 to 6 meg. 50 Microamps full scale. 99/6

TV REMOTE CONTROL

For PHILIPS 19TG111A, 121A, 125A, 142A, 23TG111A, 113A, 121A, 131A, STELLA T1033A, 39A, 43A, 53A, COSSOR CT1910A, 21A, CT2310A, 21A, 31A. PHILIPS Price 3 gns.



Our Price 12/6 Post 2/6.
 Brand new. Includes 11ft. 7-way cable. MULLARD OAS1 2 pots, 3 switches, 5 resistors.

RETURN OF POST DESPATCH

RADIO COMPONENT SPECIALISTS 337 WHITEHORSE ROAD, WEST CROYDON

Written guarantee with every purchase. (Export—Send remittance and extra postage; no C.O.D.) (Buses 133, 68 pass door). S.R. Stn. Selhurst. Tel. THO 1665

RELAYS

SPECIAL OFFER QUICK DELIVERY
 Complete and guaranteed relay with any coil value up to 4,000 ohms, with the following light duty silver build-ups:—
 1 MK or 1 BK or 1 C/O, 7/6 each.
 2 MK or 1 MK and 1 BK or 2 C/O or similar, 9/6 each.
 4 MK or 4 BK or 4 C/O or similar, 10/6 each.
 4 MK and 4 BK or 6 C/O, 12/6 each.
 With higher value coils:
 Up to 5,000 ohms, add 1/-. Up to 10,000 ohms, add 2/-.
 Up to 22,000 ohms, add 3/-. With twin coils, add 2/-.
 The lowest prices in the trade.
 Postage and packing etc. 2/- per relay.
COILS—most coil values in stock from 2/- each.

ALSO RELAYS BUILT TO YOUR SPECIFICATIONS AND REQUIREMENTS
 OUR NEW SERVICE—Your own Type 3,000 Relays repaired and rebuilt to order.


SIEMENS HIGH SPEED RELAYS
 50/50 ohms, 6/6 each; 250/250 ohms, 7/6 each; 500/1,000 ohms, 7/6 each; 850/850 ohms, 7/6 each; 1,000 + 1,000 ohms, 8/6 each; 1,700/1,700 ohms, 10/6 each.
 Postage and packing 2/- per relay.

S.T.C. SEALED RELAYS
 700 ohms, 2 C/O, 4184 GD, 10/6 each. P. & P. 1/6.
G.E.C. SEALED RELAYS
 Send for lists and details, from 7/6 each. P. & P. 1/6.

CO-AX CHANGE-OVER RELAYS
 Ex Air Ministry: Switch unit type M 10F/166. Encased in metal box with appropriate sockets. 12 v. D.C. operation, 15/- each. P. & P. 5/-.

DYNAMOTORS. Made in U.S.A. 27 v. D.C. input, 285 v. D.C. (120 mA) output. 15/- each. P. & P. 6/-.
ROTARY TRANSFORMERS. 12 v. D.C. input, 250 v. D.C. output (approx. 35 watts). Ideal for operating shavers and other universal mains appliances in your car, caravan or boat. 30/- each. P. & P. 7/6.

WRITE, CALL OR PHONE:
DEPENDABLE RADIO SUPPLIES
 12 TOTTENHAM ST., LONDON, W.1
 LANgham 7391 1 min. Goodge St. Station.

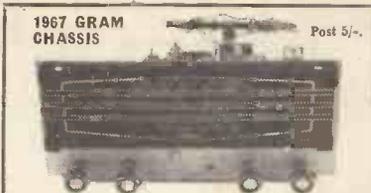

1967 GRAM CHASSIS Post 5/-
 Three Wavebands: Five Valves: ECH81, EF89, Long, Med. Short, Gram. EBC81, EL84, EZ80.
 12-month guarantee. A.C. 200-250 v. Ferrite Aerial 5 watts 3 ohms. Chassis 13in. x 7in. x 5in. dial size 13in. x 4in. Two Pilot Lamps. Four Knobs. **£10.10**
 Aligned calibrated. Chassis isolated from mains.
DE-LUXE STEREO GRAM CHASSIS, VEF, MW, SW 19-50 m, SW 60-150 m. Magic eye, push buttons, 6 valve plus rect. Size 15 x 7 1/2 x 6in. high £19.19

HIGH GAIN TV. PRE-AMPLIFIER BAND I B.B.C.
 Tunable channels 1 to 5. Gain 18 dB. ECC84 valve. Kit price 32/6 or 55/- with power pack. Details 6d. BAND III I.T.A.—same price. Tunable channels 7 to 13. Band I or III. Coils and circuits only. 9/6. Chassis 4/9. B.B.C.2 Super Booster. UHF Transistor Model ready made 75/-.

BLANK ALUMINIUM CHASSIS. 18 s.w.g. 2 1/2in. sides. 7 x 4in., 5/6; 9 x 7in., 6/6; 11 x 9in., 6/6; 11 x 7in., 7/6; 13 x 9in., 9/6; 14 x 11in., 12/6; 15 x 14in., 15/6.
ALUMINIUM PANELS 18 s.w.g. 12 x 12in. 5/6; 14 x 9in. 4/6; 12 x 8in. 3/6; 10 x 7in. 2/9; 3 x 6in. 2/-; 6 x 4in. 1/6.

STELLA RECORD PLAYER AMPLIFIER
 4 watt, 2 stage, 3 to 7 ohm. Neg. feedback. UCL52, UY85. 200-250V. A.C. tapped input. Chassis size 8 1/2 x 4in. high. Gold/Walnut knobs. Volume and Tone controls on separate Polished Wood Panel 6 x 2in. Brand new with maker's guarantee. Bargain price. P. & P. 2/6. **78/6**

ALL PURPOSE TRANSISTOR PRE-AMPLIFIER
 Gain 14:1, 250v. or 9v. output. Ready built with Mn Metal input transformer for Mike's. Pick-Ups, Tuners. Instructions and circuit supplied. Post 2/6. **15/-**

THE INSTANT BULK TAPE ERASER AND RECORDING HEAD DEMAGNETISER



200,250 v. A.C. Leaflet S.A.E. Post 35/- 2/6

Post and Packing 1/6 unless otherwise stated. C.O.D. 5/- extra. Full List 1/-

80 ONLY — SANGAMO 3IN. SCALE LABORATORY MOVING COIL METERS. 100 Microamp/250 microamp movements etc. 55/- each. CALLERS ONLY.

FM TUNER 88-108Mc/s. Six Transistor. Superhet Ready built, Printed circuit. Calibrated slide dial tuning. Size 6 x 4 x 2 1/2in. £8.10

3-WATT QUALITY AMPLIFIER 4 Transistor Push-pull. Ready built, with volume control. 75/-

★ **RADIO BOOKS** ★ (Postage 9d.)
 Radio, TV Valves, Diodes, Transistor equivalents... 10/6
 High Fidelity Speaker Enclosures and Plans... 5/-
 Transistor Superhet Commercial Receivers... 7/6
 Mullard Audio Amplifier Manual... 8/6
 Radio Valve Guide, Books 1, 2, 3, 4 or 5... each 5/-
 Practical Radio Inside Out... 4/6
 Transistor Aud. Amplifier Manual... 3/6
 Shortwave Transistor Receivers... 3/-
 Transistor Communication Sets... 6/-
 International Radio Stations List... 2/6
 Modern Transistor Circuits, for Beginners... 7/6
 Sub-Miniature Transistor Receivers... 5/6
 Wireless World Radio Valve Data... 9/6
 At a glance Valve equivalents... 6/-

RESISTORS. Preferred values, 10 ohms to 10 meg. 1/6 w., 20c. 3d.; 1 1/2 w. 8d.; 2 w. 1/-; 4 w. 10c. 6d.
HIGH STABILITY. 1 w. 1% 2/-; Preferred values, 10 ohms to 10 meg. Ditto 5%, 10 ohms to 22 meg. 8d.
 5 watt. 0.5 to 8.2 ohm 3 w. 1/6
 10 watt. 10 ohms to 8,800 ohms 3/0
 15 watt. 10 ohms to 8,800 ohms 3/6
10K, 15K, 20K, 25K, 30K, 10W.
MAINS DROPPERS. Midset. With sliders. 0.3 a., 1K, 0.2 a., 1.2 K., 0.15 a., 1.5 K. 6/-.
LINE CORD 100 ohms ft. twin plus resistance 1 w. R.
WIRE-WOUND 3-WATT WIRE-WOUND 4 WATT POTS. Miniature T.V. STANDARD SIZE POTS. Values 10 ohms to 30K, 3/3. LONG SPINDLE VALUES Carbon 30 K. to 2 meg., 3/-.
50 OHMS to 100 K., 7/6.

VALVE HOLDERS. Int. Oct. 6d. Mazda Oct. 6d. 8/6 B7G B8A, B8G, B9A Moulded 9d. Ceramic 1/-, B7G, B9A cans 1/- Valve base plugs B7G, B9A, Int. Oct. 2/3.

C.R.T. BOOSTER TRANSFORMERS
 for heater cathode short or falling emission, 25% and 50% BOOST. 200/250v. A.C. input. STATE TUBE VOLTAGE REQUIRED, 2 or 6 or 13 v. Post 2/6 **15/6**

BRAND NEW QUALITY EXTENSION LOUDSPEAKER
 In tough cream plastic cabinet with 20ft. lead and adaptors. For any transistor radio intercom, mains radio, tape recorder, etc. 3 to 15 ohm matching. Size: 7 1/2 x 5 x 3in. **30/- POST 2/6.**

CALLERS WELCOME

ELECTRONIC INSTRUMENTS & EQUIPMENT

Designed and Manufactured to order.
 General Electronics including Timers, Counters, Programmers, Tape Recording.
 Consultations and Estimates free and without obligation. Box No. 5031 c/o "Wireless World"

KINGSTON-UPON-HULL Education Committee, College of Technology, Principal E. Jones, M.Sc., F.R.I.C.

FULL-TIME courses for P.M.G. certificates and the radar maintenance certificate, also in electrical and electronic engineering.—Information from College of Technology, Queen's Gardens, Kingston-upon-Hull.


TV and Radio, City & Guilds, R.T.E.B. Certs., etc., on "satisfaction or refund of fee" terms, thousands of passes. For full details of exams and home training courses (including practical equipment) in all branches of radio, TV, electronics, etc., write for 132-page handbook—free; please state subject.—British Institute of Engineering Technology (Dept. 150K), Aldermaston Court, Aldermaston Berks. [148]

CAPACITY AVAILABLE

AIRTRONICS, Ltd., for coil winding, assembly and wiring of electronic equipment, transistorised sub-unit, sheet metal work.—3a, Waterland Rd., London, S.E.13. Tel. Lee Green 1706. [107]

BARGAINS! BARGAINS!

Ex. Government Equipment.
 All items available as previously advertised. Complete List 1/- (S.A.E.)
A. J. THOMPSON (Dept. W.W.)
 Eiling Lodge, Codicote, Hitchin, Herts.
 Tel: Codicote 242

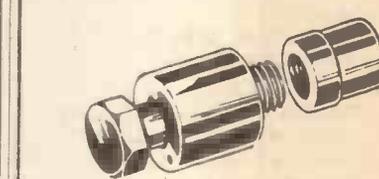

The PUNCH you need!

HOLE PUNCHES

Instant Type	1 1/2in. diameter	6/10 ea.
Screw-up Type	15/32in. diameter	8/6 ea.
	Toggle switch	8/6 ea.
	B7G	9/- ea.
	B8A, B9A	9/6 ea.
		10/2 ea.
		10/8 ea.
		11/8 ea.
		13/4 ea.
	Int. Octal	16/2 ea.
		18/10 ea.
	B9G	21/8 ea.
		24/4 ea.
	Meter	33/2 ea.
	Complete Set 29	3 6

No extra charge for postage and packing in the U.K.

Tompkins & Longman

237 GIPSY ROAD, WEST NORWOOD, S.E.27
 Tel.: Gipsy 5000



4-STATION INTERCOM
 Usually 18 Gns. **£6/9/6**
 our price Only

Solve your communication problems with this new 4-Station Transistor Intercom system (1 master and 3 subs), in de-luxe plastic cabinets for desk or wall mounting. Call/talk/listen from Master to Subs and Subs to Master. Operates on one 9 v. battery. On/off Switch. Volume control. Ideally suitable to modernise Office, Factory, Workshop, Warehouse, Hospital, Shop, etc., for instant inter-departmental contacts. Complete with 3 connecting wires, each 86ft. and other accessories. Nothing else to buy. P. & P. 3/6 in U.K.



Transistor TELEPHONE AMPLIFIER
 Usually 6 Gns. **55/-**
 OUR PRICE ONLY

Why not increase efficiency of Office, Shop and Warehouse with this incredible De-luxe Portable Transistor TELEPHONE AMPLIFIER which enables you to take down long telephone messages or converse without holding the handset. A status symbol? Yes, but very useful one. A must for every telephone user. On/off switch. Volume Control. Operates on one 9 v. battery which lasts for months. Ready to operate. P. & P. 2/6 in U.K. Add 2/6 for Battery. Full price refunded if returned in 7 days.

WEST LONDON DIRECT SUPPLIES (W.W.),
169 Kensington High Street, London, W.8
WW-172 FOR FURTHER DETAILS



INTERCOM/BABY ALARM
 Usually 6 Gns. **49/6**
 Our Price Only

This wonderful TWO-WAY TRANSISTOR INTERCOM consists of two units—Master and Sub—in Ivory plastic cabinets with chromium stands. Operates on one inexpensive battery. Call, talk or listen from Master to Sub and Sub to Master. On/off switch. Full Volume Control. **IDEAL AS A BABY ALARM.** Or communicate with your neighbour or listen for telephone bell in other room. Hundreds of other uses. Indispensable, in Home, Shop, Nursery, Surgery and Office. A boon for spastics and disabled. Saves shouting and walking up and down the stairs. Complete with 80ft. connecting lead. Battery 2/6 extra. Ready operate. P. & P. 2/6 in U.K.

INDEX TO ADVERTISERS

Appointments Vacant Advertisements appear on pages 113-123

	PAGE
Access Equipment Co., Ltd.	62
Acoustical Mfg. Co., Ltd.	10
Adcola Products, Ltd.	63, Cover iii
A.D.S. Relays, Ltd.	34
Adkins, K.	123
Advance Electronics, Ltd.	47
Akurate Eng. Co., Ltd.	124
Amatronic	127
Amplivox, Ltd.	25
ANDERS Electronics, Ltd.	26, 35
A.N.T.E.X., Ltd.	12, 58, 59
A.P.T. Electronics, Ltd.	53
Armstrong Audio, Ltd.	22
Astralux, Ltd.	77
Audio Fair	24
Audix, B. B., Ltd.	127
Avo, Ltd.	1
Avonlea Tools	46
Batey, W., & Co.	34
Belling & Lee, Ltd.	71
Bentley Acoustic Corp., Ltd.	89
Bi-Pak Semiconductors	125
Brenell Engineering Co., Ltd.	62
Britan, Chas. (Radio), Ltd.	85
Birmingham Sound Reproducers, Ltd.	50, 51
Black, J.	128
Bradley, G. & E., Ltd.	27
Box 5031	129
British Communications Corp., Ltd.	14
British Electrical Resistance Co., Ltd.	60
Britec, Ltd.	32
British Institute of Engineering Technology	33
Broadfields	126
Brown, A. G., Ltd.	28
Brown, N. C., Ltd.	38
B. S. Radio & Electrical Store	105
Bulgin, A. F., & Co., Ltd.	Edit. 151
Bullers, Ltd.	26
Cannon Electric Ltd.	51
Carr Fastener Co., Ltd.	28
Celeston, Ltd.	41
Chambers College	126
Codar Radio Co.	50
Coubro & Scrutton, Ltd.	69
Comtex, Ltd.	34
Concord Electronics	124
C.R.E.I. (London)	9
Croydon Precision Insts., Ltd.	64
Cursons, B. W.	128
Cybernaut, Ltd.	64
Davis & Whitworth, Ltd.	106
Daystom, Ltd.	2, 3, 4, 5
Deimos, Ltd.	128
Dependable Radio	129
Drake Transformers, Ltd.	17
Ecom, Ltd.	22
Electronics (Croydon), Ltd.	102
Electro-Winds, Ltd.	62
Electroniques (S.T.C.)	74
Electrovalve	126
Elliott Instruments Co., Ltd.	56
Empire Exporters Inc.	29
English Electric Valve Co., Ltd.	54
E.M.I. Electronics, Ltd.	59
Erie Resistor, Ltd.	13
ETA Tool Co., Ltd.	52
Exchange & Mart	123

	PAGE
Ferranti, Ltd.	21
Ferroglyph, Ltd.	70
Finnigan Speciality Paints, Ltd.	128
Fractional Motors, Ltd.	56
G.E.C. Electronics, Ltd.	80
Gee Bros. (Radio), Ltd.	109
Genevac, Ltd.	20
Gladstone Radio	89
Glaser, L., & Co., Ltd.	124
Goodmans Industries, Ltd.	43, 44, 45
Goodwin, C. C. (Sales), Ltd.	112
Grampian Reproducers, Ltd.	125
Hanover Fair	30
Harris Electronics (London), Ltd.	32
Harris, P.	123
Hart Electronics	127
Harversons Surplus Co., Ltd.	97
Henry's (Radio), Ltd.	100, 101
Howell's Radio, Ltd.	63
H.P. Radio Services, Ltd.	89
Iliffe Books Ltd.	58, 94
I-Cor	128
I.M.O. (Electronics), Ltd.	95
Industrial Instruments, Ltd.	40
Instructional Handbook Supplies	125
International Correspondence Schools	51, 128
John's Radio	125
K.G.M., Ltd.	42
Keyswitch Relays, Ltd.	73
Kolectric, Ltd.	24
Lasky's Radio, Ltd.	86, 87, 88
Leak, H. J., & Co., Ltd.	81
Ledon Instruments, Ltd.	94
Lee Electronics, Ltd.	84
Levell Electronics, Ltd.	8
Lewis Radio Co.	112
Light Soldering Developments, Ltd.	46
Lind-Air, Ltd.	38
Lionmount & Co., Ltd.	126
London Central Radio Stores	127
Lustraphone, Ltd.	62
Lyons, Claude, Ltd.	55
M.A.C.	97
Malvyn Engineering Works	128
Marconi Company, Ltd.	79
Marshall, A., & Son (London), Ltd.	128
McMurdo Instrument Co., Ltd.	72
Mediterranean Communication Equip. Co.	58
Mills, W.	98
Modern Book Co.	126
Morganite, Ltd.	49
M.R. Supplies, Ltd.	42
Multicore Solders, Ltd.	Cover iv
New Era Books, Ltd.	112
Newmarket Transistors, Ltd.	61
Newmart	106
Nombrex, Ltd.	59
N.S.F., Ltd.	76
Olrus Electronics, Ltd.	97
Omron, Ltd.	19
Osmabet, Ltd.	126
Padgetts	127
Partridge Transformers, Ltd.	32
Patrick & Kinnie	127
P.C. Radio, Ltd.	99
Pembridge College of Electronics	108
Pinnacle Electronics, Ltd.	15
Pitman, Sir Isaac & Son, Ltd.	112
Post Radio Supplies	124

	PAGE
Pye Telecommunications, Ltd.	11
Quartz Crystal Co., Ltd.	124
Racal Instruments, Ltd.	36, 37
Radford Electronics, Ltd.	61
Radio & T.V. Components (Acton), Ltd.	107
Radiatron	42
Radio & T.V. Services, Ltd.	7
Radio Component Specialists	129
Radio Exchange Co., The	94
Radiospares, Ltd.	124
Raife, P. F.	108
R. & R. Radio	124
Rank-Wharfedale, Ltd.	16, 56
Rastra Electronics, Ltd.	46
Readers Radio	94
Record Housing	28
Reproducers & Amplifiers, Ltd.	30
Resolound, Ltd.	48
Rock & Taylor, Ltd.	128
Rollet H., & Co., Ltd.	128
R.S.C. Hi-Fi Centres, Ltd.	104, 105
Salford Elec. Inst. Co., Ltd.	60
Sallis, A. T.	127
Samsons (Electronics), Ltd.	101
Service Trading Co.	92, 93
Sifam Electrical Inst. Co., Ltd.	18
Silentbloc, Ltd.	6
Sinclair Radionics, Ltd.	82, 83
S.M.E., Ltd.	20
Smith, G. W. (Radio), Ltd.	90, 91
Smith, H. L., Co., Ltd.	40
Smith, John, Ltd.	63
Sound Coverage, Ltd.	65
Special Product Distributors	124
Stamford, A. L.	126
Starman Tapes	112
Standard Telephones & Cables, Ltd.	Cover ii
Stern-Clyne, Ltd.	103
Sutton Electronics	126, 127
Tannoy, Ltd.	123
Taylor Electrical Inst. Co., Ltd.	31
Technical Trading Co.	125
Tektronix U.K., Ltd.	78
Tequipment, Ltd.	66
Teonex, Ltd.	57
Thompson, A. J.	129
Thorn-A.E.I. Radio Valves & Tubes, Ltd.	68
Thorn Special Products, Ltd.	23
Tomura Kaisha	106
Tompkins & Longman	129
Transmetrix Electronic Systems, Ltd.	84
Trio Corporation	39
T.R.S. Radio	96
Universal Book Co.	128
Valradio, Ltd.	26, 52
Vitality Bulbs, Ltd.	46, 106
Vortexion, Ltd.	75
Watts, Cecil E., Ltd.	123
Webber, R. A., Ltd.	32
West Hyde Developments, Ltd.	123
West London Direct Supplies	130
Whiteley Elec. Radio Co., Ltd.	38, 52
Wilkinson, L. (Croydon), Ltd.	92
Wyndor Recording Co.	84
Yukan	128
Z. & I. Aero Services, Ltd.	110, 111

Printed in Great Britain for the Publishers, ILLIFFE ELECTRICAL PUBLICATIONS LTD., Dorset House, Stamford St., London, S.E.1, by CORNWALL PRESS, Paris Garden, London, S.E.1. *Wireless World* can be obtained abroad from the following: AUSTRALIA and NEW ZEALAND: Gordon & Gotch, Ltd. INDIA: A. H. Wheeler & Co. CANADA: The Wm. Dawson Subscription Service, Ltd.; Gordon & Gotch, Ltd. SOUTH AFRICA: Central News Agency, Ltd.; William Dawson & Sons (S.A.) Ltd. UNITED STATES: Eastern News Co., 306 West 11th Street, New York 14.



NEW HIGH EFFICIENCY TOOLS



TEMPERATURES AVAILABLE

- 250°C 27 WATTS
- 360°C 50 WATTS
- 410°C 60 WATTS
- 500°C 95 WATTS

ILLUSTRATED

R 900, RIGHT ANGLE, FITTED WITH STANDARD $\frac{1}{16}$ in. BIT.

For full information and sales apply direct to

HEAD OFFICE SALES & SERVICE

ADCOLA PRODUCTS LTD
ADCOLA HOUSE, GAUDEN ROAD,
LONDON, S.W.4.

Telephones: Macaulay 0291/3 Telegrams: SOLJOINT, LONDON, S.W.4

AUSTRALIAN ASSOCIATES: ADCOLA PRODUCTS PTY LTD., 673 WHITEHORSE ROAD, MONT ALBERT, MELBOURNE
AGENTS IN ALL LEADING COUNTRIES

WW-002 FOR FURTHER DETAILS.



THE QUEEN'S AWARD
TO INDUSTRY 1966

ERSIN

Multicore

5 CORE

SOLDER

solder dispensers



SIZE 5

SIZE 4A

SIZE 15

SIZE 14



SIZE 12



SIZE 10



SIZE 11

Hundreds of tons of Ersin Multicore Solder are used annually in the manufacture of electronic equipment. The same high quality solder is available in convenient packages for workshops and service organisations. Here is a selection from the wide range of specifications available. All, except Sizes 11 and 14, contain Ersin Multicore Solder with 5 cores of extra fast non-corrosive flux. The solder wire is ingeniously coiled in the new, handy dispensers enabling the soldering operation to be made simpler.

SIZE 5 Contains 12 ft. of 18 s.w.g. Savbit alloy which makes copper soldering iron bits last ten times longer. 2/6 retail.

SIZE 4A A similar dispenser to size 5, but containing 9 ft. of 18 s.w.g. 60/40 alloy. 2/6 retail.

SIZE 15 21 ft. of 60/40 alloy 22 s.w.g. contained in a narrow dispenser for soldering small components, transistors, diodes and printed circuits. 3/- retail.

SIZE 14 Contains 7 ft. coil of 40/60 alloy 16 s.w.g. Arax acid cored solder for metal repairs. The flux residue may be washed off with water. This solder is not suitable for electrical joints. 3/6 retail.

SIZE 12 102 ft. of 18 s.w.g. Savbit alloy. 15/- retail.

SIZE 10 212 ft. of 22 s.w.g. 60/40 alloy. 15/- retail.

SIZE 11 50 ft. of 16 s.w.g. Arax acid cored solder alloy. 15/- retail.

Bib
REGD
MODEL 8

WIRE STRIPPER AND CUTTER

FOR QUICK AND ACCURATE
FLEX AND CABLE STRIPPING
WITHOUT NICKING WIRE

Cuts wire cleanly and splits plastic twin flex. Immediately adjustable to eight sizes of flex or cable by ingenious gauge selector. Essential for factory maintenance service, and home use. Fitted with plastic cushioned handles, nickel plated.



Supplied with full instructions
for use. 8/6 retail.

Obtainable from all good Electrical and Hardware shops. In case of difficulty write to:
MULTICORE SOLDERS LTD., HEMEL HEMPSTEAD, HERTS. TELEPHONE: HEMEL HEMPSTEAD 3636 TELEX: 82363

WW-003 FOR FURTHER DETAILS