

GOODMANS SPEAKERS AND SPEAKER SYSTEMS

Imported from Great Britain

Dual 8" Hi-Fi Speaker System

NET \$82.81
\$5.00 Down

A beautifully performing, space-saving speaker system. Consists of two Axiette II-8 8" hi-fi speakers installed in a bookshelf-type enclosure. Beautifully finished on four sides in gleaming hand-rubbed veneers, the system can be used in either the lowboy or highboy position—on a shelf, bookcase or in a room divider. Delivers exceptionally clean response from 30 to 18,000 cps—ideal for use in pairs for stereo reproduction. Available in choice of three popular colors to blend harmoniously with any decor. Speakers feature hyperbolic free edge cone suspensions and rugged, die-cast frame constructions for dazzling performance. Capacity, 30 watts. Impedance, 8 ohms. 11x23½x11¼". Specify mahogany, blonde or walnut. Shpg. wt., 37 lbs.
70 DU 468C. Only \$5.00 Down. NET. 82.81

AXIETTE II-8 8" HI-FI SPEAKER. Highly efficient, wide-range 8" high-fidelity speaker at moderate cost. Delivers clean, remarkably smooth response over the entire audio spectrum from 30 to 18,000 cycles. Features hyperbolic free edge cone suspension and heavy-duty, die-cast frame construction for optimum performance. Ideal for use in pairs in stereo music systems. Power handling capacity, 15 watts. Resonance, 55 to 65 cps. Requires 7" baffle opening diameter. Impedance, 16 ohms. Depth, 4". Shpg. wt., 5 lbs.
79 D 163. Only \$2.00 Down. NET. 26.46



Horizontal View
 Handsomely finished on four sides for highboy or lowboy placement—anywhere!

2—Axiette II-8

TETRA XIOM 575 15" 4-WAY SPEAKER
 An outstanding 4-way speaker. Has four electrically and acoustically independent elements built into a single unit. Response, 20 cps to beyond audible range. Employs heavy woofer, horn-loaded Midax mid-range unit and 2 Trebax high-frequency horns. Includes dual crossover network with wired balance controls. Crossovers at 950 and 5000 cps. Capacity, 50 watts. Total flux, 308,000 maxwells. Voice coil dia.: 3" for woofer, 1½" for Midax, 1" for Trebax horns. 16 ohms. Depth, 11". 50 lbs.
79 DU 158. \$10.00 Down. NET. 227.85

TETRA XIOM 355. As above, but capacity is 40 watts; 240,000 maxwells. 45 lbs.
79 DU 159. \$5.00 Down. NET. 192.57

TRIA XIOM 3-WAY HI-FI SPEAKERS
 Expertly designed 12" 3-way speakers featuring free-edge cone suspension and efficient magnet systems. Response, 20-20,000 cps. Crossovers at 2000 and 5000 cps. Voice coil dia.: woofer and mid-range, 3"; Trebax horn, 1". Resonance, 35 cps. Impedance, 16 ohms.

MODEL 212 12" SPEAKER. Capacity, 25 watts. Total flux, 178,000 maxwells. Magnet wt., 1¾ lbs. Depth, 7". Wt., 20 lbs.
79 DX 160. \$5.00 Down. NET. 68.11

MODEL 412 12" SPEAKER. Capacity, 35 watts. Total flux, 240,000 maxwells. Magnet wt., 3¼ lbs. Depth, 8¾". Wt., 31 lbs.
79 DU 295. \$5.00 Down. NET. 90.65

TREBAX HI-FI TWEETERS
 Excellent tweeters containing built-in volume control and crossover network assembly. Ideal for 2 or 3-way systems. Response from 2500 to 25,000 cps. Employs 1" aluminum voice coil. Impedance, 16 ohms.

MODEL 50XL. Capacity, 50 watts. 5 lbs.
70 D 469. \$2.00 Down. NET. 45.57

MODEL 35XL. Capacity, 35 watts. 4 lbs.
70 D 470. \$2.00 Down. NET. 38.71

AUDIOM 12" AND 15" SPEAKERS
 (Not illustrated.) 12" and 15" woofers delivering exceptionally smooth bass and mid-range response from 20 to 5000 cps. Perfect choice for 2, 3 and 4-way stereo and monophonic speaker systems requiring crossovers at 200, 500, 750, 950, 1250, 2500 or 5000 cycles. Virtually free edge cone suspension and die-cast frames. Imp., 16 ohms.

AUDIOM 652 12" SPEAKER. Voice coil diameter, 3". Total flux, 240,000 maxwells. Power capacity, 35 watts. Resonance, 30 to 35 cps. Shpg. wt., 24 lbs.
70 DU 473. \$5.00 Down. NET. 68.11

AUDIOM 755 15" SPEAKER. Voice coil diameter, 3". Total flux, 240,000 maxwells. Power capacity, 40 watts. Resonance, 25 cps. Shpg. wt., 27 lbs.
70 DU 474. \$5.00 Down. NET. 76.44


MIDAX H950 MID-RANGE TWEETER
 Beautifully performing compression-type driver and horn. Handles 50 watts in 2 or 3-way speaker systems. Response, 400-13,000 cps. Recommended crossover: 950 cps in 2-way systems; 5000 cps in 3-way systems. Impedance, 16 ohms. Depth, 12½". Shpg. wt., 13 lbs.
79 DX 167. \$2.00 Down. NET. 47.53

CROSSOVER NETWORKS
 (Not illustrated.) Top-performing, twin-section LC crossover networks for use in Goodmans 2 and 3-way speaker systems. 12db per octave. Impedance, 16 ohms.

XL-5000V. 5000 cps crossover with level control. Shpg. wt., 3 lbs.
79 D 168. NET. 13.23

XL-950V. 950 cps crossover with level control. Shpg. wt., 4½ lbs.
79 D 169. \$2.00 Down. NET. 26.95

XO-950/5000. Crossovers at 950 and 5000 cps. Shpg. wt., 7½ lbs.
79 D 170. \$2.00 Down. NET. 27.44

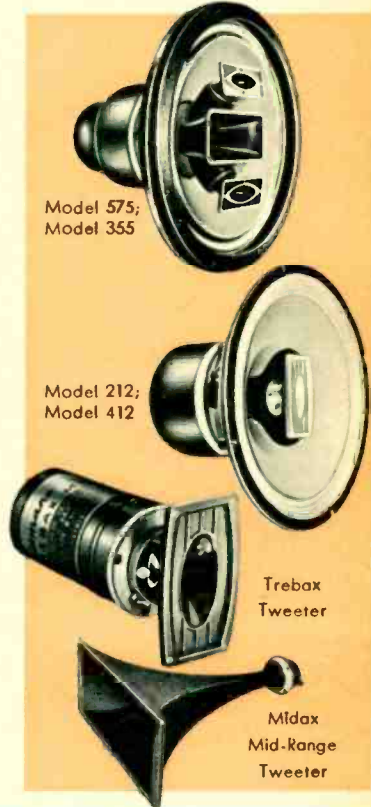

Model 575; Model 355

Model 212; Model 412

Trebax Tweeter

Midax Mid-Range Tweeter

NEW S10-30 STEREOSPHERE HI-FI SPEAKER

Delivers superb response from 300 to 20,000 cps—ideal for use with your present speaker system for excellent stereo reproduction. Only 10" diameter—set it anywhere or hang it on a wall—rotates, swivels or tilts to provide omnidirectional hi-fi sound when used with IDM network, below. Capacity, 30 watts. Less network, below. Shpg. wt., 10 lbs.
70 DX 471. Only \$5.00 Down. NET. 77.91

IDM-30 CROSSOVER NETWORK. (Not illus.) Frequency-dividing, isolation and mixer network. Handles up to two S10-30 speakers, above. Crossover at 300 cycles. Shpg. wt., 7 lbs.
70 D 472. \$2.00 Down. NET. 38.71

