

The

Call Letter

of the Northwest Vintage Radio Society

Vol. 24

February 1998

No. 2



In print since 1974

The Northwest Vintage Radio Society

The Northwest Vintage Radio Society is a non-profit historical society incorporated in the State of Oregon. Since 1974 the Society has been dedicated to the preservation and enjoyment of "Vintage radio" and wireless equipment.

Membership in the Society is open to all who are actively interested in historic preservation. The dues are \$15.00 for domestic membership, due on January 1st of each year (prorated quarterly).

The *Call Letter* has been a monthly publication since 1974. It was originated with the founder, Bob Bilbie, and our first president, Harley Perkins. Through several editors and with the assistance of numerous members of the *Call Letter* has continued to be a publication that both informs members of the society's business and that has supported the hobby of collecting, preserving, and restoring vintage radios.

Society meetings are held the second Saturday of each month (except July and August) at the Buena Vista Club House at 16th & Jackson Streets in Oregon City, Oregon. They convene at or about 10 AM for the purpose of displaying radios, conducting Society business, and exchanging information. Guests are welcome at all Society meetings and functions (except board meetings).

Other Society functions include guest speakers, auctions, radio show, and radio sales which are advertised in the *Call Letter* and are held in and around Portland.

Society Officers:

President	David Rutland	(541) 929-4498
Vice-President	George Kirkwood	(503) 296-3735
Treasurer	Ed Charman	(503) 654-7387
Secretary	Liles Garcia	(503) 649-9288
Board member at large	Jerry Talbott	(503) 649-6717
<i>Call Letter</i> Editor	Rick Walton	(503) 284-5648

The Society's address is:
The Northwest Vintage Radio Society
Post Office Box 82379
Portland, Oregon 97282-0379



February 1998

Table of Contents

From the Editor	2
Meeting Minutes	2
1998 NWVRS Calendar of Events	4
Wandering on the Web	4
In the Shack	5
Address Changes.....	6
Swap Shop	7

The *CALL LETTER*

Editor, Rick Walton, (503) 284-5648, rwalton@teleport.com

**Call Letter Deadline
25th of the month
prior to publication.**

The next NWVRS meeting will be February 14 at the Buena Vista Clubhouse in Oregon City. Don't forget to pay your annual dues!

**Visit the *new* NWVRS web site at:
<http://www.peak.org/~wren/nvrs.html>.**

The Call Letter is the official publication of the Northwest Vintage Radio Society. Circulation is limited to the membership and guests of the Society. The Society is not responsible for the material contributed for publication, nor the quality, timeliness, or accuracy of the items offered for sale in the SWAP SHOP. By common agreement of the board of directors, the buyer assumes all responsibility for the satisfaction of any transaction.

From the Editor

by *Call Letter* Editor, Rick Walton

If the format of this month's *Call Letter* looks a little different to you, it's because I am using a new publishing tool and have formatted things a little differently. I have endeavored to keep it as much like the previous issues as I can, but the changes I've made I hope are improvements.

In this month's issue I've included a most informative monograph by Brian Belanger called *All About Getters*. It was originally published in May, 1987 by the Mid-Atlantic Antique Radio Club. Dick Karman acquired permission to reprint it and sent to me in December, but I haven't been able to use until now. It's added as an insert to the center of this issue so that you can remove it if you choose.

As usual, Mike Parker has provided us with another thought-provoking article. This time he considers his changes in attitude toward collecting.

My thanks to the members of the Society for approving the purchase of a scanner for my use (see the Meeting Minutes). It will enable me to add more pictures to the *Call Letter* and include more reproductions of antique advertising and literature.

Be sure to note the dates on the Calendar of Events, and if you know of items that should be listed, please let me know. And did you notice on the first page that we have a new URL for our web page? President David Rutland has taken over the duties of the web page. Take a look and let Dave know what you think.

Meeting Minutes

Liles Garcia, Secretary

The January 10, 1998 meeting of the NorthWest Vintage Radio Society was called to order by President Dave Rutland at approximately 10:00 AM. There were 43 members and guests present.

Treasurer Ed Charman gave us the treasurer's report.

We had four guests: Roger Brown, Mike Roy, Scott Hoke, and a fourth guest.

Good and Welfare

Sonny recently visited Tech Sloat in Ridgefield, Wa, and mentioned that Tech would like to have more visitors come by.

President's Message

Dave discussed the several committees that help our club function so well:

- Our Vice-President, George Kirkwood, is Program Chairman.
- Our Call Letter Editor, Rick Walton, is assisted by Ron Hershey, Dick Karman, and others. Rick thanked Mike Parker for his contributions.
- Our Swap Meet Committee Chairman, Myron White, announced that our Spring Swap Meet will be on May 9 at the Washington County Fairgrounds in Hillsboro. The Swap Meet will be in the South Hall and the Portland Amateur Radio Club will be joining us for this swap meet.
- The Library Committee Chairman, Tony Hauser, said that he would have a list of our library items next month.
- The Membership Committee has Dan Howard, Jerry Talbott, Brian Toon, and Speed Feldschau. Jerry and Speed are coordinating our participation at the Sounds of Nostalgia Show in Salem in February. Dan Howard attends the Northwest Car Collectors Swap Meet in mid-October and shows a club display.

Old Business

George commented that our Christmas Party was a success. Matt Neal provided the organ music for us. A note of thanks to Matt.

New Business

The members voted to spend \$200.00 for a scanner for Rick's computer so that he can scan in printed information for the Call Letter. Sonny may be able to get us one for \$100.00.

Sonny will be selling the radio collection at the Northwest Vintage Radio Museum. (This is Frank and Mary Rasada's collection at the building where we used to have our meetings.) Sonny will be marketing and selling the higher value radios first. He will also put an ad in our Call Letter.

Program

Members and guests showed and discussed the radios that they brought. The radios were homemade crystal and homemade tube sets.

The meeting adjourned at 11:20 AM.

1998 NWVRS Calendar of Events

- February 14** Regular meeting. Monthly feature: old and rare vacuum tubes and special radio parts.
- February 15** "Sounds of Nostalgia" in Salem. Speed alerts you to "Bring you own chairs!"
- February 21** Salem Hamfair at Rickreall--(Largest ham swapmeet in Oregon)
- March 14** Regular meeting.
- March 28** Eugene Hamfest at Eugene
- April 11** Regular meeting.
- May 9** Spring Swap Meet with Portland Amateur Radio Club
— South Hall at Washington Co. Fairgrounds



Wandering on the Web

by Dick Karman

Dick was unable to compile a list of web sites for this issue. Look for this feature to return in upcoming issues.

A historical look at one
aspect of the vacuum tube.

All About Getters

A Monograph
by Brian Belanger
with Dian Belanger

Have you ever wondered why some early vacuum tubes had clear glass envelopes, so that the electrodes inside were visible, while other tubes were almost completely coated on the inside with a silvery metallic substance, and still others had a multi-colored appearance? These differences arose from the type of getter used. A getter is a substance placed inside the tube to aid in the removal of residual gases — to “get” or trap the gas molecules that the evacuation process failed to remove during manufacture.

Those not familiar with tube technology may assume that because “vacuum tube” is an often-used synonym for radio tube, all radio tubes were evacuated. This was never the case. The famous “Tungar” rectifier bulbs and the ‘00 and ‘00A detector tubes popular during the 1920s contained gas. (The UV-200 and UX-200 used argon gas, but the later UX-200A used cesium vapor.) Gas-filled rectifier tubes such as the OZ4 and voltage regulator tubes such as the OB2 are examples of later tubes intentionally containing gas. Nevertheless, the majority of radio tubes required a high degree of evacuation to operate properly, and when such a tube became gassy due to leakage around the seals or gradual release of gases initially trapped inside, it was usually necessary to replace the tube.

The History of Getters

The precise origin of the vacuum tube getter is difficult to establish. Since gettering techniques were closely associated with proprietary tube manufacturing technology, relatively little was published about getters. My radio history books do not completely solve the mystery of the first use of a vacuum tube getter. The earliest tubes clearly did not use getters,

but by the early 1920s, getters were commonplace. Evidence exists (see below) that getters were used as early as 1917.

In placing the development of vacuum tube getters into perspective, it is helpful to recall the primitive state of the art during the early years of tube development. Both evacuated and gas-filled tubes contributed to the development of radio, but pioneers often did not fully appreciate the different but useful roles of each nor did they always understand why each behaved as it did. The first useful radio tube was the diode (two-element) wireless detector tube invented in 1904 in England by John Ambrose Fleming; it utilized an evacuate bulb. In fact, Fleming specified in his patents that the envelope be evacuated to the highest degree achievable in order to get best performance.¹ He further recommended that the bulb be heated by some external means during the evacuation process to help drive off occluded gases. (This high-temperature "bake-out" process is still an essential part of vacuum device manufacturing.) Fleming apparently did not use any type of getter in his detector tube, or "oscillation valve" as he called it.

By the turn of the century, Lee de Forest in the U.S. was striving to develop a complete, practical system of wireless. He recognized, as did many of his contemporaries, that the detector (generally a coherer in those days) was the weakest link in the then-popular systems. De Forest experimented with a number of detectors, including modified coherers, electrolytic detectors, and flame detectors, but concluded that some radically new and improved detector was needed. His 1906 invention of the triode (three-element) tube, or "audion" as he called it, stands as one of the great discoveries in the history of radio technology.

Debate continues today as to whether de Forest invented the audion solely as an outgrowth of his work on flame detectors or whether he was merely trying to find a way to circumvent the Fleming patent. De Forest always claimed the former and denied that he even knew of Fleming's valve prior to his invention of the audion, which he said had little in common with the Fleming valve other than superficial appearance. Both Gerald Tyne and Hugh Aitken state that there is evidence that De Forest was well aware of Fleming's invention.² In any case, de Forest's audion was not a highly evacuated tube. Indeed, he argued that the presence of gas in the bulb was an essential part of the invention. Accordingly, there were no getters in audion tubes. Tyne explains the operation of the audion as follows: "A tube containing a small amount of gas, such as the early audions, has sensitive spots (kinks) on its characteristic curves, particularly when operated at low anode voltages. These result from the ionization of small traces of gas, too small to make the tube break over

into blue glow. This ionization causes a reduction in space charge and results in greatly increased anode current. When operated on one of these kinks the tube has phenomenal sensitivity as a detector.”³

During the first two decades of the twentieth century, understanding of the physics of electronic conduction in vacuum and ionized gases was sketchy, and arguments raged on in the technical press about whether radio tubes should be highly evacuated or have gas purposely introduced. The terms “hard tube” (referring to a highly evacuated tube) and “soft tube” (referring to a tube containing gas) were adopted, and each had its champions.

It is easy to understand why confusion developed during this period as to which type of tube was best. The available facts at first seemed inconsistent. The Fleming diode was highly evacuated and worked fairly well as a detector. The de Forest audion was gas-filled and worked even better. H. W. McCandless, who manufactured audions for De Forest, warned his customers that a high vacuum decreased rather than increased sensitivity.⁴ The type ‘OG (UV-200) detector, introduced in 1920, was gas-filled and was a very sensitive detector. In light of this string of successes for gas-filled tubes, many non-experts concluded that gas-filled tubes were the design of choice for detectors, and there was probably a tendency to assume that the same was true for tubes intended as amplifiers. But evidence was steadily accumulating from work at General Electric and Western Electric that triode amplifier tubes needed evacuation to operate properly and that a tube which performed well as a detector might not perform well as an amplifier and vice versa. Stokes notes that “Because the so-called ‘soft’ tube, i.e., one containing a comparatively poor vacuum, had been found to be considerably more sensitive than a ‘hard’ tube when used as a detector this fact actually hindered [the hard tube’s] development as an amplifier.”⁵

Prior to World War I, vacuum pumps were crude. Instruments for accurately measuring high vacuum and calibration standards were not readily available. Techniques for producing reliable metal-to-glass seals were not widely known. It is quite possible that unimpressive performance reported by some early researchers investigating “evacuated” triode amplifier tubes resulted from their failure to achieve and maintain an adequate vacuum during their experiments. Furthermore, the need for proper grid bias for vacuum triodes was a subtlety discovered only after considerable experimentation with triodes took place, and so operating points used in early experiments were probably far from optimal.


Systematic research on the physics of tubes at the major industrial research laboratories, particularly General Electric and Western Electric, finally led to an understanding of vacuum and gas-filled tube behavior so that the performance of detector and amplifier tubes could be predicted from first principles. By about 1920, it was clear that while fairly effective gas-filled detector tubes could be made, triodes intended as amplifiers should be highly evacuated.

As appreciation for the importance of achieving a high vacuum grew, tube engineers began to include getters in the vacuum tubes they designed. In 1920, though, this practice was not widespread. Tyne mentions that some of the tubes made by General Electric as early as the 1917-18 period employed getters, but GE was considerably more sophisticated than most other companies involved in tube technology at that time.⁶ This reference to the use of getters is the earliest I have found. However, the idea of placing something inside a tube to influence the internal gas pressure appeared three years before that. A tube designed by H. J. Round of the Marconi Company circa 1914 utilized a pellet of asbestos in its tip "which could be heated, usually with a match flame, in order to modify the degree of vacuum as required."⁷ From the cryptic description given, it appears that this asbestos pellet may have given off gas when heated rather than absorb gas as a getter would.

Stokes implies that gettering was not used to any significant extent until GE developed the thoriated tungsten filament in 1921. Traces of residual oxygen had a much more deleterious effect on the performance of thoriated tungsten than on previously used filaments. Langmuir and his colleagues at General Electric, observing this phenomenon, utilized a magnesium getter in order to realize reliably the potential of the new filament.⁸ The first edition of Van Der Bijl's classic comprehensive book on tube theory and practice, *The Thermionic Vacuum Tube*, copyrighted in 1920, discussed the physics and technology of vacuum tubes and the effect of residual gases in great detail, yet the word "getter" was nowhere mentioned, which suggests that the use of getters was rare at that time.⁹

Types of Getters

In the early days of broadcasting, some receiving tubes of a given type used getters while others of the same type did not. For example, the early Westinghouse WD-11 "Aeriotrons" did not use a getter. Later, the "Radiotron" WD-11 tubes made by Westinghouse but sold by RCA used a lime getter (calcium oxide) applied on the sides of the glass stem inside

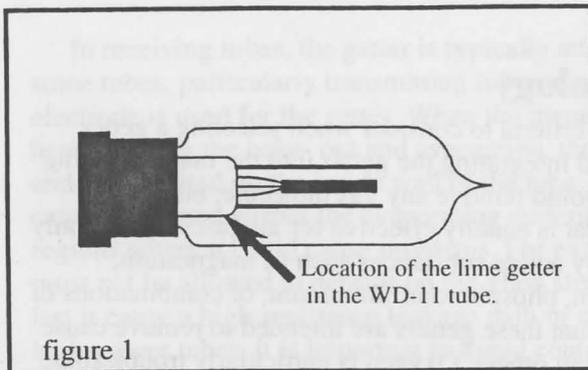

the tube. You can spot one of the lime getter tubes by looking for a white powdery deposit on the glass at the point shown in figure 1.

For a short period during the early 1920s, red phosphorous getters were used in tubes such as the UV-199 and UV-201A made for RCA by General Electric at their Nela Park plant near Cleveland. These tubes, often called "rainbow tubes," are highly prized by collectors because of the unusual iridescent colors in the tube envelope, typically reds and golds. At the same time, tubes made by General Electric at their Harrison, NJ, plant used magnesium getters which gave them the more familiar silvery coating inside the bulb. In fact, the vast majority of the UX-201A tubes manufactured throughout the twenties employed the magnesium getter. In most tubes of this period, the amount of magnesium used was sufficient to coat almost the entire inside of the tube envelope.

Not all colored tubes owed their colors to getters. Several companies employed gimmicks during the 1920s and 30s to boost tube sales. Companies such as Arcturus and Brightson marketed tubes made with blue glass. The color of the glass had nothing to do with getting, unlike the rainbow tubes mentioned earlier, but was simply a marketing ploy. The blue glass tubes did look more impressive when lit than ordinary tubes, and the public may have thought that the blue glass somehow improved performance, a misconception undoubtedly encouraged by these firms.

As tube technology evolved during the 20s and 30s and indirectly heated cathodes replaced the simple thoriated tungsten filaments, getter technology also progressed. Higher vacuums were achieved. Getter geometries were optimized for various classes of tubes. New getter materials began to be used. For example, many of the more modern-type tubes used barium as a getter.

Gettering Technology

There are a number of criteria to consider when selecting a getter material and geometry and integrating the getter into the manufacturing process. An ideal getter would remove any gas molecule, but it is difficult to find a getter that is equally effective for all gases. Commonly used getters are chemically active substances such as magnesium, calcium, barium, strontium, phosphorous, aluminum, or combinations of these. Some of the gases that these getters are intended to remove cause more problems in tubes than others. Oxygen is particularly troublesome because it oxidizes the cathode material and alters the electron emission from the surface. Even inert gases can have adverse effects, since they ionize, producing electrons and positive ions. The positive ions neutralize the space charge and change the tube characteristics. They can also strike the cathode with sufficient force to sputter off active material and degrade the emission.

Some types of getters (e.g., the lime getter used in some WD- 11 tubes) were simply applied within the bulb and left to function, but metallic getters were usually "flashed" (vaporized by rapid heating) at the end of the evacuation process. This step occurred after a relatively long period of pump-down and bake-out.

When the glass bulb is heated during bake-out, the glass gives off trapped water vapor, carbon dioxide, and nitrogen. If the temperature is raised in increments during the bake-out process, additional gas is evolved at each step. There is a limit to how high the temperature can be raised, since it must be kept below the point where the glass softens and changes shape. Typical glass bake-out temperatures are in the range 300 to 500 degrees Celsius, depending on the type of glass used. The metal parts of the tube may be heated to higher temperatures than the glass envelope by techniques such as radio-frequency induction. Still other gases such as carbon monoxide may be evolved from the metal parts of the tube during the bake-out process. For metal- envelope tubes, the entire tube is usually heated to high temperatures in a gas-fired furnace.

Getters operate in more than one way.¹⁰ In part, the gas molecules in the tube react chemically with the getter and in part the gases are adsorbed and trapped in a monatomic layer on the surface of the getter. The getter works not only at the time of tube manufacture, but continues to take up gas over the life of the tube. (Some authors refer to the getter as a "keeper" when performing the latter function.) Gases taken up by the surface of the getter may, in some cases, slowly diffuse into the getter material, thus permitting the surface of the getter to take up additional gas.

In receiving tubes, the getter is typically attached to the anode. In some tubes, particularly transmitting tubes, a separately heated auxiliary electrode is used for the getter. When the metal structure of the tube is heated during the bake-out and evacuation, the typical getter evaporates and is deposited on the inside wall of the tube. The getter must be carefully placed so that the evaporating material does not deposit in regions where it could cause problems. For example, a metallic getter must not be allowed to deposit on the glass stem between the lead wires lest it cause a high-resistance leakage path or even a short circuit. For high-power tubes, it is important to avoid coating too much of the glass surface since a mirror-like getter material such as magnesium will reflect the heat back into the tube and the tube will overheat.

Induction heating was often used to flash the getter material in glass envelope tubes, but induction heating cannot be used to vaporize the getter in metal-envelope tubes since the envelope shields the inside of the tube from electromagnetic fields. A commonly used gettering technique for metal tubes was to weld a tantalum ribbon between the metal envelope and the ground pin of the octal base. The ribbon was formed into a trough and filled with barium berylliate. After pump-out, a high current was sent between the shell and the ground pin, heating the tantalum strip and causing the barium berylliate to react with the tantalum to form free barium, an excellent getter material.¹¹


Conclusion

Without getters, vacuum tube technology could not have progressed as rapidly as it did, and the electronic age we know today would probably not have evolved in quite the remarkable way it did. The manufacture of the complex integrated circuits of today involves elaborate vacuum technology during the processing, and so perfecting the technology of evacuating and gettering vacuum tubes helped pave the way for the solid-state era.

References

1. Gerald F. J. Tyne, *Saga of the Vacuum Tube* (Indianapolis: Howard W. Sams & Co, 1977), p. 42.
2. *ibid.*, p. 53. See also Hugh G. J. Aitken, *The Continuous Wave: Technology and American Radio, 1900-1932* (Princeton, NJ: Princeton University Press, 1985), p. 204.
3. Tyne, p. 70.
4. Aitken, p. 231.
5. John W. Stokes, *70 Years of Radio Tubes and Valves* (Vestal, NY: Vestal Press, 1982), p. 8.
6. Tyne, p. 153.
7. Stokes, p. 10.
8. *ibid.*, p. 17.
9. H. J. Van Der Bijl, *The Thermionic Vacuum Tube and Its Applications*, 1st Edition ('New York: McGraw Hill, 1920).
10. L. R. Keller, *The Physics of Electron Tubes*, 2nd Edition (New York: McGraw Hill, 1937), p. 98.
11. A. V. Eastham, *Fundamentals of Vacuum Tubes*, 2nd Edition (New York: McGraw Hill, 1941), p. 32.

This is published and distributed as a benefit of membership for the NW Vintage Radio Society of Portland, Oregon. It is a complete and exact copy of the original monograph which was written and distributed as an aid to the historic collection and restoration of wireless and antique radio equipment. The NW Vintage Radio Society is not responsible for the use or application of this information..

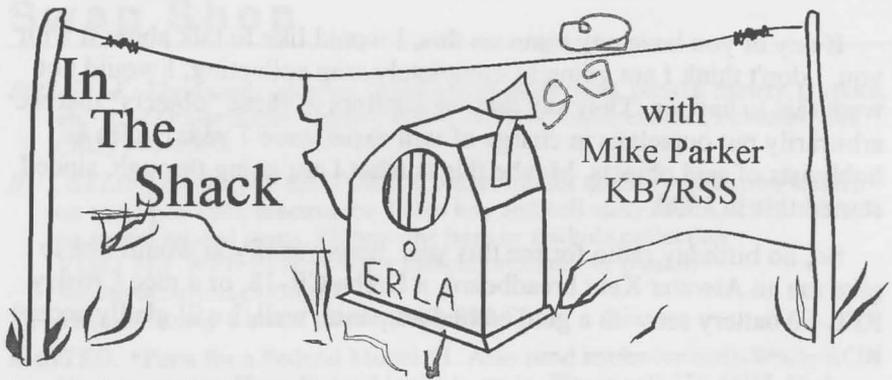

In the Shack

No Birthday Radio

I am going to be the grand old age of 57 this month. My, how things are changing! I guess I will not be getting a "Birthday Radio" this year. I suppose what I am really trying to say to you fellow collectors is that I really don't particularly care if I get one or not, and that is quite a change from the way I felt about it 5 years ago. The underlying message that I am trying to send is that there is something that we collectors go through that only time seems to bring about and I think that we develop a different perspective on how we approach the acquisition and care of what we collect. You long time hobbyists out there may be well aware of this syndrome. Apparently, I am just realizing it.

Just a few years ago, I would conjure up any old excuse to have a certain radio that I liked. A birthday radio I bought for just me, myself and I. A Christmas radio, a vacation radio, a walk into a second hand shop radio. Even a radio that I thought I could get away with because it was a type my wife likes! I know that I am not the first to use THIS excuse!

Now, it seems that I am somehow "holding out" or rationalizing in some way that I will wait until I find only the ones near the top of my long running "GOTTAHAVIT" list. I have acquired most all of my recently purchased radios this way...sort of a super selective attitude. Oh, I will admit that I have been putting my money into other places lately, I am trying to buy a piano, I put a lot of my money into a couple of my vehicles lately and the results are rewarding me now, I am trying to channel more money into fixing up the old house. These are definite reasons to not buy radios but this underlying fact still remains, I have changed my outlook on radio collecting. It's too bad because currently, a lot of local radios are being offered for sale at this time.

Swap Shop

FOR SALE: Thousands of tubes, hundreds of radio parts, panels, meters, surplus, etc. R5-D3 electronic surplus, Bob Lee, 6111 Se 82nd Ave., Portland, OR, (503) 774-6560.

BUY, SELL, TRADE and RESTORE: Contact me for quality restoration service on most pre-1960 electronics. I also buy and sell early radios, TV's, tubes, parts and related items. I'll buy one item or a whole collection.

VISIT MY WEB SITE: <www.radiolaguy.com> or e-mail:

<sonny@radiolaguy.com>

Thanks, Sonny Clutter, phone (360) 834-5741

WANTED: *Parts for a Federal Model 61. Also need knobs for early WSA, RCA Navy receivers. Have Federal items to trade. Please call 775-6697, Dick Howard.

WANTED: **I would like to talk with people who worked in Military Communications. Dan Howard

WANTED: *Antenna insulators and lightning arresters. 761-7799, Dan Howard.

WANTED: **Dial Glass or complete chassis and escutcheon for a Grunow 1081 Floor model radio. The dial glass is about 3 inches in diameter. Several models took the same lens. If you think you may have, let me know. Thanks in advance. Wayne Brown (503) 282-6463 or wayneb@involved.com.

WANTED: *A good flyback for RCA 8-inch portable TV, model 8-PT-7030. RCA Victor part number 102045. in Sams 336-14. Glen Bricker (541) 942-3717.

FOR SALE: *Fair supply of good used tubes from '20's and '30's such as 01A;s, and 2-number tubes such as 24A, 26, 27, 41, 42, 45, 47, 75, 78, 80, and more! Also have new and used 21's and a pair of new 75901's. Glen Bricker, (541) 942-3717.

FOR SALE: **RELOCATING OUT OF STATE: Must sell radios, parts, books, etc. Many table and floor model radios - wide variety to include Zenith, Sparton, Philco, Grunow. Misc. TV's including Philco Predictas. If interested, call to arrange viewing time. Phone: Scott MacGregor (503) 661-1294, e-mail: sjmacgregor@juno.com.

FOR SALE: *Vintage TV's. Have 5 sets to sell, \$10-35 each. Call me for details. Jerry Talbott (503) 649-6717 home, (503) 627-4451 work.

Leads:

FOR SALE: **The items for sale are in SW Washington. The lady's name is Gloria Cummings and her phone # is (360) 892-2203, or contact Tony Hauser, (503) 629-4836. Highlights are:

- Single and multi-unit "can" capacitors
- Resistors, diodes, and crystals
- Lamps and speakers
- Phono cartridges, needles, coils, and transformers
- Vibrators
- Photofact and other folders
- Simpson 555 tube checker
- Hickock AC51 tube checker
- Jackson TVG2 sweep marker generator
- SECO F84 flyback tester
- EICO 400 scope
- jackson 106 oscillator
- Simpson 485 field strength meter
- Tube caddies, parts cabinets, and tube stock shelves

